

Allsteel®

Concensys®

SPECIFICATION & PRICE LIST 2017

prices effective January 29

Concensys Panel System
Cadence® Desking
Essentials™ Storage
Extensions™ Accessories

PDF updated June 30, 2017

PAINTED METAL FINISHES

● CORE COLORS GRADE P1

Black	P27
Brownstone	P7D
Bungalow	P7C
Carob	P52
Flint	P02
Fossil	P28
Loft	P7B
Muslin	P4J
Parchment	P93

● SELECT COLORS GRADE P2

Brilliant White	PQ8
Champagne Metallic	PR5
Gunmetal Metallic	PR3
Platinum Metallic	PR2

PAINT COLOR INDICATORS

Pages in this pricer reference the following symbols:

● CORE PAINTED METAL COLORS

● SELECT PAINTED METAL COLORS

Metallic paints, due to varying reflectance, may appear to have less visual color consistency than other paint finishes, even when L/A/B values are exactly the same. (L/A/B — measurable aspects of color — values are maintained within a specified range, to ensure consistent appearance of paint colors.)

METAL STORAGE PULLS

Black	E4
Matte Silver	EL

ELECTRICAL AND DATA COMPONENTS

Black	E4
Brownstone	EY
Bungalow	EX
Flint	E9
Loft	EV
Muslin	EU
White	EW

Recommended Coordinate Colors:

Brilliant White use White EW
Carob use Black E4
Champagne Metallic use Muslin EU
Fossil use Flint E9
Gunmetal Metallic use Brownstone EY
Parchment use Muslin EU
Platinum Metallic use Loft EV

LAMINATES

GRADE L1

CORE

Ash	LT3B
Brownstone*	LM13
Bungalow*	LM12
Camelstone	LT6A
Canyon Zephyr	LT5B
Desert Zephyr	LT5A
Flint*	LM16
Frosty White*	LM14
Grey Mesh	LT8A
Greystone	TM65
Loft*	LM11
Muslin*	LM15
Parchment	TM20
Pewter Mesh	LT8C
Sheer Mesh	LT8B
Silver Mesh	LT8D
White Tigris	LT2A
Whitestone	TM33

WOODGRAIN

Natural Maple*	LWD
Shaker Cherry*	LW7C

GRADE L2

Amber Cherry*	LWAC
Beigewood*	LWBE
Branded Oak* NEW!	LBO1
Brazilwood*	LWBR
Columbian Walnut*	LWZ
Ebony Recon* NEW!	LER1
Fawn Cypress* NEW!	LFC1
Lowell Ash*	LLA1
Mangalore Mango* NEW!	LMM1
Natural Recon*	LNR1
Phantom Charcoal* NEW!	LPC1
Phantom Ecu*	LPE1
Portico Teak*	LPT1
Skyline Walnut*	LSW1

GRADE L3

Cafelle*	LWC
Charcoal Walnut*	LWCW
Natural Walnut*	LWNW

* Storage available in these 25 laminates.

EDGE COLORS

Amber Cherry	DA
Beigewood	DE
Black	E4
Brazilwood	DB
Branded Oak NEW!	BO
Brownstone	EY
Bungalow	EX
Cafelle	DG
Carob	E8
Charcoal Walnut	DC
Columbian Walnut	DZ
Ebony Recon NEW!	DR
Fawn Cypress NEW!	FC
Flint	E9
Fossil	EH
Loft	EV
Lowell Ash	DL
Mangalore Mango NEW!	MM
Muslin	EU
Natural Maple	DD
Natural Walnut	DN
Natural Recon	NR
Parchment	EN
Phantom Charcoal NEW!	PC
Phantom Ecu	PE
Platinum Metallic	EP
Plyband ♦	PL
Portico Teak	DP
Shaker Cherry	DF
Skyline Walnut	SW
White	EW

NOTE: \$33 upcharge on Woodgrain T-Mold.

♦ Edge is limited to flat edge surfaces: rectangle, square, trapezoid, polygon, or round. No curvilinear or combination curve and straight. No T-Mold.

METAL GROMMETS

FOR LAMINATE WORKSURFACES

Oval/Square:	
Matte Silver	EL

PLASTIC GROMMETS

FOR WORKSURFACES

Black	E4
Brownstone	EY
Bungalow	EX
Carob	E8
Flint	E9
Fossil	EH
Loft	EV
Muslin	EU
Parchment	EN
White	EW

PLASTIC GROMMETS WITH WOODGRAIN EDGE

If woodgrain edge is specified, the plastic grommet color is predetermined, based on finish selection.

Beigewood, Fawn Cypress, Natural Maple, and Natural Recon	Muslin EU
Branded Oak	Brownstone EY
Phantom Charcoal	Flint E9
Phantom Ecu	Loft EV
Portico Teak	Fossil EH
Skyline Walnut	Flint E9
All other woodgrain options	Black E4

LOCKS

Matte Silver	EL
--------------------	----

- Software support packages furnished to the customer, either by Allsteel® or by another source, which support the sale of Allsteel products are superseded by printed price lists.
- Prices are subject to change without notice. All orders are subject to prices in effect at the time of order.
- Please refer to your Allsteel Dealer Sales and Discount Policies for order placement information, terms and conditions.
- Additional copies of this Specification and Price List are available upon request from Allsteel Literature Fulfillment at 1-866-255-7833.

- Ordering information appears at the bottom of each product page complete with examples on how to specify. Fabric and finish pages are referenced at the bottom of product pages.

This publication is available as an interactive or downloadable PDF at www.allsteeloffice.com.

Questions or Comments?

Please call us at: **888-ALLSTEEL**
888-255-7833

Finishes	Inside Front Cover
Table of Contents.....	3
New, Revised, and Discontinued Products.....	4
Allsteel Lifetime Warranty	5
COM and Specials Policies.....	6-8
Programs.....	9-10
Typicals Overview.....	11

SPECIFICATIONS

Introduction and Overview	12-13
Working with Panels and Connectors	14-20

PANELS AND CONNECTORS

Tackable Acoustical Panels.....	21
Stacking and Glazed Panel Frames.....	22
Doors — Hinged Door Panel and Sliding Doors.....	23
Connectors, End Covers, and Wall Mount Kits	24-26
Tackboards.....	27

ELECTRICAL (8-WIRE)

Working with Electrical & Data	28-33
Power Harnesses, Pass-Thru Cables, and Jumper Cables.....	34
Duplex Receptacles, In-feeds, Power/Data Dome	35
Power Poles and Electrical & Data Components	36-37

WORKSURFACES & SUPPORTS

Working with Worksurfaces and Supports.....	38-46
Working with Cadence® Freestanding Desking	47-55

Laminate Flat Edge

Primary, Wave, and Bow Front	56-57
Corner, Corner Shelf, and Corner Cove	58-59
Altitude® Height-Adjustable.....	59
Peninsula, P-Shaped, Jetty, and Boomerang	60
Reef, Quarter-Round, and D-Shaped	61
Countertops	62
9120 Program for Non-Standard Sizes	64-65

Laminate T-Mold Edge

Primary, Wave, and Bow Front	66-67
Corner, Corner Shelf, and Corner Cove	68-69
Peninsula, P-Shaped, Quarter-Round, and D-Shaped.....	70-71
Countertops	72

Worksurface Supports

Panel-mount Worksurface Supports and Brackets.....	73
Cadence Desking Worksurface Supports and Brackets	74
Cadence Desking Modesty Panels and Gussets	75
Universal Modesty Panels and Metal Center Drawers	76

METAL OVERHEADS

Working with Overheads, Shelves, and Hutches	77-81
Overhead Cabinets, Shelves, and Tackboards	82-83
Hutches and Tackboards.....	84

STORAGE

Introduction and Overview	85-86
Working with Essentials™ Storage	87-94
Essentials Metal Pedestals	95-97
Essentials Metal Personal Files and Towers	98-99
Essentials Metal Lateral Files	100
Essentials Metal Combination Files	101
Essentials Metal Cabinets and Bookcases	101
Laminate Tops for Essentials	102
Cubby Laminate Storage.....	104

EXTENSIONS™

Introduction	105
Working with Organization Tools.....	106-108
Tool Rails.....	109
Work Tools.....	110
Marker Boards, Center Drawers, and Technology Modules.....	111
Working with Ergonomic Accessories.....	112-115
Keyboard Supports, CPU Hammocks, and Corner Sleeve	116
Monitor Arms and Tablet Arms	117
Working with Illumination	118-119
Illumination	120-121

APPENDIX AND INDEX

Locking Specification/Easy Lock	122-124
16" x 20" Fabric Samples and Touch-Up Paint.....	125
Replacement Parts Order Form.....	126
Index — Model Numbers with Page Reference	127-129
Panel Fabrics	Inside Back Cover

NEW PRODUCTS

Storage

Essentials™ 18"D Pedestals — 7/6/2016

Extensions™

Power/Data Modules with USB ports — clamp on and under worksurface — 11/7/2016

NEW FINISHES

Laminates — Branded Oak LBO1, Ebony Recon LER1, Fawn Cypress LFC1, Mangalore Mango LMM1, Phantom Charcoal LPC1 — 1/29/2017

Laminates — Lowell Ash LLA1, Natural Recon LNR1, Phantom Ecru LPE1, Portico Teak LPT1, Skyline Walnut LSW1 — 7/3/2016

Edges — Branded Oak BO, Ebony Recon DR, Fawn Cypress FC, Mangalore Mango MM, Phantom Charcoal PC — 1/29/2017

Edges — Lowell Ash DL, Natural Recon NR, Phantom Ecru PE, Plyband PL, Portico Teak DP, Skyline Walnut SW — 7/3/2016

Panel Fabrics — Refuge Eclipse RFG990 and Glacier RFG991 — 1/1/2017

Panel Fabrics — Appoint Panel Frost APN934, Reflections Galvanized REF929 and Ice REF920, Sarto Fog SRT914, Tempest Slate TP945 and Zebra TP935, Coast Channel COA914, Pebble COA912, and Pier COA913, Spin Panel with 14 colorways, Terrain with 9 colorways, and Script with 13 colorways. (All are listed on inside back cover) — 7/3/2016

DISCONTINUED PRODUCTS

Concensys

Concensys 120° Connectors and Worksurfaces 7/3/2016

Storage

Essentials 19"D Pedestals — 6/30/2017

Essentials 26"H Pedestals — 4/1/2016

Extensions™

Footrest — 1/2017

Touch-Up Paint

Accent Colors — all colors — 10/6/2016

DISCONTINUED FABRICS

Tasanee — all colorways 12/15/2017

Celestial — all colorways 12/31/2016

Imprint, Jet Set, and Stagger — all colorways 7/3/2016

Lifetime Warranty

Allsteel Inc. warrants its products to be free from defects in material and workmanship for as long as the original purchaser owns them, except as set forth below.

Allsteel shall repair or replace with comparable product (at Allsteel's discretion), free of charge, any Allsteel product or component manufactured after January 29, 2017, that fails under normal commercial office use.

This warranty is subject to the following provisions:

Some natural variations occurring in wood, leather, or other natural materials are inherent to their character and not considered defects. Allsteel does not warrant the colorfastness or matching of colors, grains, or textures of these materials. Additionally, a Customer's Own Material (COM) selected by, and used at the request of, a user is not warranted.

The materials and components listed below are covered according to the following schedule from the date of sale:

- Wood products and electrical components (lamps and ballasts are not covered), seating controls, pneumatic cylinders, glides, casters and polymer-based components, and foam — 12 years
- Wood seating, stacking chairs, Sum® AutoFit® technology, and laminates — 10 years
- User-adjustable worksurface mechanisms, tablet arm mechanisms, interior wood-framed seating and lounge products, occasional tables, Mimeo™ mesh, Quip™ mesh, Scout® mesh, panel and seating upholstery fabrics, and other covering materials — 5 years
- Marker board surfaces and upholstery on Gather™ products — 3 years
- #19®, Access™, Acuity®, Clarity®, Inspire®, Lyric™, Quip, Relate®, Scout, Seek®, Sum, and Trooper® asynchronous and synchro-tilt models are warranted for multiple shifts and users up to 300 lbs. Mimeo is warranted for multiple shifts and users up to 350 lbs. Lyric Large & Tall is warranted for multiple shifts and users up to 400 lbs. Trooper Large & Tall is warranted for multiple shifts and users up to 500 lbs. All other Allsteel chairs and components are warranted for single-shift, 40-hour workweek usage.

- #19 chair, including components and material, is warranted for as long as the original purchaser owns the chair.
- #19, Access, Acuity, Clarity, Lyric, Relate, and Seek mesh/carriers and Mimeo and Quip carriers are considered structural chair components and as such are warranted for as long as the original purchaser owns the chair.
- Undercabinet LED light — fixture warranted for 3 years; power supply warranted for 1 year
- Link™ LED light — 5 years
- Wand™ LED Light — fixture warranted for 5 years; power supply warranted for 3 years
- Beyond™ Movable Walls — 10 years; moving parts such as door hardware and door mechanisms — 5 years; customer's own hardware — supplier warranty

This warranty does not apply to:

- Normal wear and tear over the course of ownership, including fabric puddling
- Damage from sharp objects (e.g., writing utensils, heeled shoes, scissors, jewelry, keys)
- Modifications or attachments to the product not approved by Allsteel
- Products not installed, used, or maintained in accordance with product instructions and warnings
- Products used for rental purposes
- Damage caused by the carrier in-transit, which is handled under separate terms
- Third-party products. Allsteel, to the extent possible, will pass through to the original purchaser (and process claims under) any warranty provided by manufacturers of undercabinet lighting, ergonomic work tools, or other third-party products supplied by Allsteel.

TO THE EXTENT ALLOWED BY LAW, ALLSTEEL MAKES NO OTHER WARRANTY, EITHER EXPRESS OR IMPLIED, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. ALLSTEEL WILL NOT BE LIABLE FOR ANY CONSEQUENTIAL OR INCIDENTAL DAMAGES.

This warranty applies only to products sold within the United States of America and the Commonwealth of Canada.

Your Allsteel Dealer is our mutual partner in supporting your warranty requests. To obtain service under this warranty, please contact your Allsteel Dealer.

COM Program

Allsteel understands that customers may at times want to specify fabrics outside of Allsteel's standard fabric offering. Our COM program was designed to make specifying COMs on Allsteel products a simpler, friendlier, and hassle-free process. This process is simple and easy to use, and is described below under "Allsteel to Supply (ATS)." If a Dealer wishes to manage the COM process themselves, they can do so by following guidelines under "Dealer to Supply (DTS)". **ATS is the preferred method for all COM fabrics.** With ATS, Company will provide acknowledgment based upon planned date of receipt of COM fabric and manage the entire process. DTS is allowed if it is not a partnership fabric or if Company does not have access to the supplier. **DTS may cause order delays and is strongly discouraged.** Find out more about Allsteel's COM process by emailing our COM Department at allsteelcomteam@allsteeloffice.com.

Allsteel to Supply (ATS):

1. Select the fabric you wish to use and check the COM Search on Synergy. You need the COM supplier's name, fabric pattern name, and color name to search for approved fabrics.
2. If your fabric is listed as an approved fabric, you may place your order directly with Allsteel Customer Support. Please use the fabric code (e.g., S216426XP) from the COM Test Request on your order in the place of the standard fabric code. **Make sure to mark on the top of the order "Allsteel to Supply."** If your fabric is not listed as approved, you will need to select the "Request COM Test" link on the COM Search website. Allsteel will arrange to obtain test fabric and you will be notified of the results within 3 to 5 working days of receipt of the test yardage by Allsteel.
3. If the fabric is approved, you will receive an email summary from Allsteel with the correct price grade and fabric code for order purposes. Written COM price quotes hold pricing for 90 days after issue date.
4. Once the fabric has been approved by Allsteel, enter your order directly with Allsteel Customer Support. Allsteel will purchase all COM fabric directly from the COM suppliers and schedule for production.

In the event that the Dealer decides to cancel a COM fabric order, the Dealer is responsible for the cost of the fabric plus a handling charge that is equal to 10% of the fabric cost.

Dealer to Supply (DTS):

1. Select the fabric you wish to use and check the COM Search on Synergy or call Allsteel Customer Support to see if the fabric you have chosen has already been tested and approved on the product you are interested in.

You need to have the COM supplier's name, fabric pattern name, and color name for this inquiry.

2. If your fabric is listed as approved, and it is not a Partnership

fabric, you may request a "Dealer to Supply" code and estimate the yardage required by using the yardage requirements listed in the price list by model. For questions please contact Allsteel Customer Support.

3. If your fabric is not listed as already tested and approved, you will need to complete a COM Test Request on Synergy. You will need to arrange for the test fabric to be sent to:

HNI Fabric Testing
Attn: COM Dept.
2210 2nd Avenue
Muscatine, IA 52761

Allsteel requires 3 yards of fabric and 2 memo samples for each panel system fabric being tested; and 4 - 8" x 8" memo samples for all seating testing. You will be notified of the test results within 3 to 5 working days of receipt of the test yardage by Allsteel.

4. Make sure to use a "Dealer to Supply" COM code (e.g., S216426ZP) and place your order directly with Allsteel Customer Support.
5. All "Dealer to Supply" orders will be charged Grade 4 pricing for seating, Grade 3 for Gather, and Grade D pricing for panels. Dealers will pay for the COM fabric separately.
6. All "Dealer to Supply" fabric must be sent on a fabric roll.
7. Place your fabric order directly with the COM Supplier with instructions for the fabric to be sent on a fabric roll to:

HNI Textile Distribution Center
COM Production Yardage — PO Number
Docks 20-22
301 Mulberry Avenue
Muscatine, IA 52761

Information that **MUST** be included in the packing slip attached to the fabric:

1. Dealer's Purchase Order number to Allsteel
2. Allsteel's Tracking number for the COM fabric
3. Dealer Name
4. Yards of Fabric

If the fabric shipment does not match the correct fabric and yardage, Allsteel will notify the Dealer for resolution.

If Allsteel receives fabric with incorrect labeling that cannot be linked to an Allsteel furniture order, Allsteel will hold the fabric for up to 7 days, while the COM Expeditor attempts to identify the order. After 7 days, Allsteel will return the fabric to sender. There are no exceptions to this policy.

Any cancelled orders are subject to cancellation charges up to the full value of the Allsteel product cancelled. Allsteel will determine the actual cancellation charge at the time the cancellation is requested.

8. For additional details on "Dealer to Supply" fabric refer to your Allsteel terms and conditions.

Additional Policy Information:

The company assumes no responsibility for the overall appearance, flammability, normal durability, colorfastness, or any other quality standards. The Company reserves the right to reject a COM if the quality of the COM is not satisfactory for the product. Should this occur, the customer will be notified with an explanation within 7 working days of receipt of test materials.

The company is not responsible for fabric that has become obsolete at the COM supplier, that is of poor quality, or that is delivered late to the manufacturer from the COM supplier. Excess yardage will be disposed of at Allsteel's discretion.


All cancellations or changes to COM orders are subject to Company approval. Because of the nature of COM, special fabrics, finishes, and structural modifications, products ordered as specials and then cancelled prior to shipment are subject to cancellation costs up to the full value of the product cancelled. The company determines the actual cancellation charge at the time the cancellation is requested. Upon approval, a cancellation number is issued to the Customer.

Purchase orders will not be accepted or entered unless the testing process is complete with positive results.

If all testing has been previously completed, re-testing is only necessary if fabric is to be used on a different product, or pattern direction has changed from that previously approved.

Previous test results can be obtained by a customer on the COM Search on Synergy or by calling Allsteel Customer Support. COM testing will require 3-5 working days from receipt of test yardage.

COM testing will require 3-5 working days from receipt of test yardage.



All COM fabric will be applied to seating and panel systems Pattern Cut unless Railroad Cut is requested and approved on the COM Test Request. Any fabrics approved as a width pass, the dealer is responsible for clarifying Railroad Cut on orders containing items that are too large to support the Pattern Cut of a fabric application (any items larger than 48" high or wide).

Fire Retardant

The Dealer is responsible for ensuring that the COM fabric is certified to meet all flame retardant requirements.

For more information, please contact Allsteel Customer Support.

YARDAGE REQUIREMENTS FOR FABRIC WITH REPEATS — FOR USE ON GATHER™ PRODUCTS

Fabric Width	Plain Fabric	2" – 14" Repeat	15" – 19" Repeat	20" – 27" Repeat	28" – 36" Repeat
54"	0	+15%	+20%	+25%	+30%
53"	+6%	+19%	+24%	+28%	+36%
52"	+13%	+23%	+28%	+33%	+38%
51"	+19%	+26%	+31%	+36%	+41%
50"	+25%	+30%	+35%	+40%	+45%
49"	+30%	+35%	+40%	+45%	+50%
48"	+35%	+40%	+45%	+50%	+55%
47"	+45%	+50%	+55%	+58%	+65%

Depending upon the pattern repeat, it may be necessary to pattern cut the fabric. This will require 10% additional fabric.

To calculate multiple repeats (vertical and horizontal), add each repeat for total yardage required. For example for a fabric width of 54": 7" vertical requires 15%, 15" horizontal requires 20% total additional yardage required equals 35% (15% + 20%). Therefore, if your chair requires 2 yards of fabric, multiply 2 by 35%. Then 2.7 yards will be yardage required.

Special Paint & Stain Policy

Allsteel at its own discretion may modify its standard products with non-standard paint and stain colors to meet specific needs. Dealer is required to submit a special paint or stain request via the COM Search on Synergy. A sample of the non-standard paint or stain color desired will be required for matching. Pricing, lead time, and order information will be provided at the time of approval.

- For each new requested stain or paint, there will be a \$500 net fee to cover supplier costs to match the special item.
- For existing, previously-approved stains or paints, there is no \$500 matching fee, however, there is a sample chip fee of \$175 net for stains and \$100 net for paints.
- Samples, preferably at least 3" x 5" chips, of the exact color desired should be sent to the Allsteel Tailored Products Group. Paint matches require (3) sample chips and stain matches require (3) sample chips. Please mail these sample chips to the address below and reference the Special Item Request Number from Tailored Solutions.

Allsteel Inc.

Attn: Tailored Products Group
2210 Second Avenue
Muscatine, IA 52761

- Allsteel will color match the sample and send control samples to the address provided in the request. Dealer will review Allsteel's color match and approve by signing the back of the sample chip. Send the signed sample back to the Allsteel Tailored Products Group.
- Special paints will be assigned a paint price grade.
- Orders will not be accepted until Allsteel receives the Dealer's written approval on the color match.
- Extended lead times will apply on orders containing special paints or stains.
- Due to manufacturing techniques, materials, and quality issues, some exclusions will apply and some matches may be declined.

Important Notes

- Natural veneer is subject to nature's quality control. Differences in grain and color are naturally occurring variations and cannot be controlled by the manufacturer and cannot be considered as product defects. Natural veneer has the characteristics and beauty of a living organism; with its own variations of grain, growth, and color patterns. For these reasons, Natural veneer is preferred by many for its warmth and personal characteristics.

- Color changes will occur over time when wood is exposed to light. For this reason, when new product is ordered as an addition to existing product, there will be color variances between the old and new product. Please remember when specifying new product that although the species of veneer will be the same, additional product is being manufactured from a different tree. It may take several months for the new furniture to mature to the color level of existing product. Even with this maturation process the additional product will not be an exact match.

Special Laminate Policy

The Company at its own discretion may modify its standard products with non-standard laminates to meet specific needs. Contact the Allsteel Tailored Products Group for pre-approved Wilson Art laminates and pricing for special laminates. When requesting a special laminate please supply manufacturer, along with name and pattern number of laminate.

- Extended lead times will apply on orders containing special laminates.
- Due to manufacturing techniques, materials, and quality issues, some product exclusions will apply and some requests may be declined.

Everyday Advantage®

Program Terms for Everyday Advantage



1. Orders must clearly state “Everyday Advantage Order” and include the appropriate Everyday Advantage contract number:
 - Everyday Concensys® Std-0131, Everyday Concensys Canada-0133
 - Everyday Optimize™/Terrace® Std-0125, Everyday Optimize/Terrace Canada-0127
 - Everyday Concensys Gov-0132
2. Orders must contain only Everyday Advantage products. Choose the correct contract in your electronic ordering system by selecting the panel system, (Concensys or Optimize/Terrace) then add other desired products. If no systems product is being ordered, either contract can be selected.
3. Everyday Advantage orders are not eligible for bid pricing.
4. The complete Concensys, Optimize, and Terrace systems lines; and all of Approach™ desking and storage. This program also includes Access™, Inspire®, Lyric™, Mimeo™, Nimble®, Relate®, Seek®, Scout®, Tolleson, and Trooper® seating. Altitude®, Aware®, and Merge® tables are available, along with Align Lockers and metal storage, and the complete Essentials™ storage line. In addition, Extensions™ ergonomic accessories and lighting are part of the offering.
5. Orders received for the program must only contain Everyday Advantage identified product. Products included in an order that are not part of the program will cause the whole order to be acknowledged as regularly manufactured products.
6. All textiles and finishes are available, but some may have extended lead times.
7. Everyday Advantage orders are not limited to a minimum or maximum.
8. All orders ship based on standard lead times. Large-quantity orders of like products may be subject to longer lead times.
9. Standard freight terms apply.
10. If driver assistance is needed, standard driver assist charges will be added at time of order entry.

Allsteel Inc. reserves the right to amend or terminate this program at any time with 30 days written notice. Allsteel is not liable for service delays caused by force majeure (circumstances beyond Allsteel's control).

A full gallery of typicals from each Allsteel system can be found on our website: www.allsteeloffice.com/TypicalsGallery. Each typical includes a complete BOM with current pricing, downloadable CAD files, and PDFs of each drawing.

Use the Allsteel Typicals Gallery to find the components in Concensys or Cadence workstations:



Concensys "L" Station 7' x 7'



Line Item	Product Description	Qty	Model Number
1	Acoustical Panel 56"H x 24"W Low Profile Painted	2	895624P
2	Acoustical Panel 56"H x 42"W Low Profile Painted	4	895642P
3	Straight Connector Kit 56"H Low Profile Painted	2	801056P
4	Ell Connector Kit 56"H Low Profile Painted	3	801156P
5	Panel End Cover - Fabric 56"H Low Profile Painted	2	801456P
6	Primary 24"D x 42"W T-Mold Edge Laminate w/Grommets	2	832442A
7	Corner 42"W x 24"D w/Radial Leading Edge T-Mold w/Grom 1		834224RA
8	Worksurface Bracket Kit (Pair)	2	831099
9	Panel Mount 24"D x 29 1/2"H Support Leg	2	CSL2429P
10	42"W Panel Mounted Shelf	2	CS42
11	Tasklight w/Electronic Ballast for 42"W	2	A870842
12	Power Harness 42"W	2	A871242
13	Duplex Receptacle Circuit 1 3+1 & 2+2 Systems	1	A871501
14	Duplex Receptacle Isolated Circuit 3+1 & 2+2 Systems	1	A871504
15	Base Power In-Feed Cable 3+1 & 2+2 Systems	1	A879072
16	Essentials Mobile Ped BBF 28"H 19 1/4"D Beveled Pull	1	PM187-203B
17	Essentials Mobile Ped FF 28"H 19 1/4"D Beveled Pull	1	PM188-202B



Concensys Private Office 6' x 11'

Provides privacy with ample storage and worksurface space.

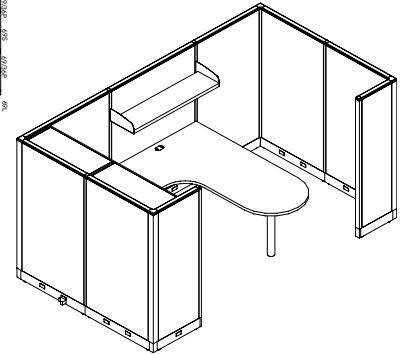

Cadence "L" Station 5'6" x 7'

Freestanding desking can provide visual privacy.

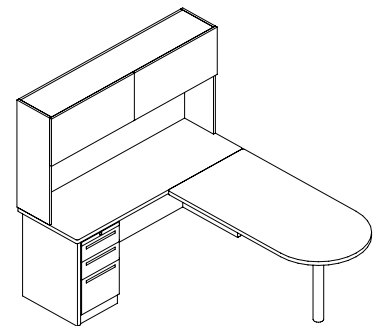

Visit www.allsteeloffice.com/TypicalsGallery to view these typicals and more.

Strong, fast, and friendly. Concensys is simple, durable systems furniture that can be delivered in days instead of weeks.

Overview



Concensys delivers exceptional quality at an attractive price. Its durable construction, ease of specification and installation, and quick ship delivery options make it the best in its class. Concensys features thin profile panels, multiple options for finishes and fabrics, and thoughtful, functional details.

Stronger

With quality details rarely seen in comparable products, including welded steel frames, threaded metal inserts on worksurfaces, metal panel connectors, top caps and kick plates, and a lifetime warranty, Concensys is built to last through multiple reconfigurations and extended use. Plus, panels are shipped fully assembled to reduce installation time and costs.

Faster

Standard production lead times average between two and three weeks.

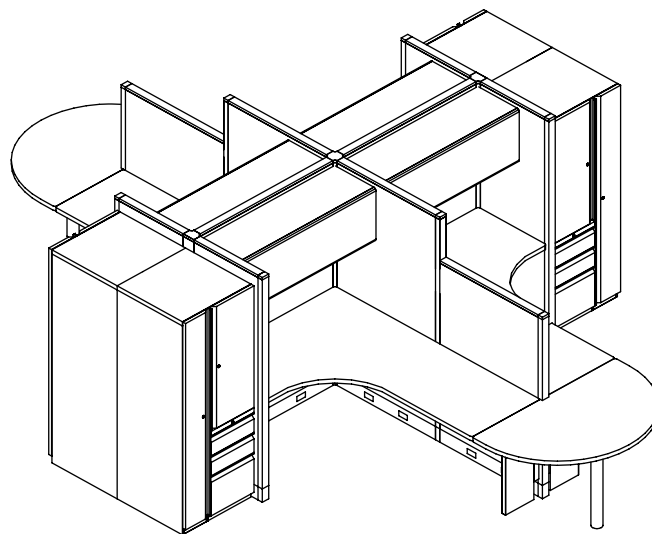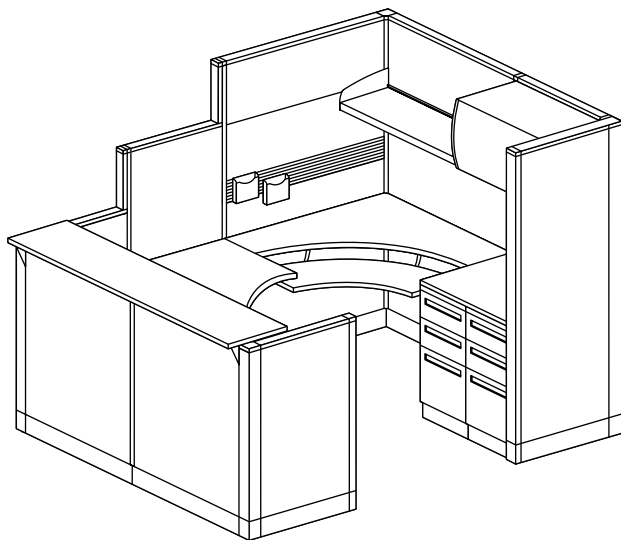

Friendlier


A monolithic, slender panel design simplifies planning, specification and installation by reducing the number of parts and the wasted space of panel creep. Panels are available in seven widths, between 18" and 60", with an enormous range of fabric and finish options to maximize design flexibility.

The Concensys Choice


Backed by Allsteel's Lifetime Warranty and manufactured to strict environmental standards, the Concensys panel system unifies the essential elements of systems furniture in one high-value, best-in-class package. In a complicated world, Concensys is intentionally simple.

It's a quality selection made easy.


Panels

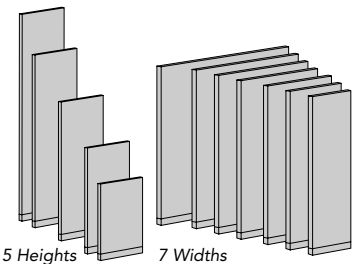


Tackable Acoustical
32"H, 43"H, 56"H, 69"H, 82"H
18"W, 24"W, 30"W, 36"W, 42"W, 48"W, 60"W




Stacking Fabric
13"H
18"W to 60"W




Stacking Glazed
13"H
24"W to 60"W



Half-Glazed
69"H
24" to 48"W



Door Panel
82"H
42"W



Sliding Door
69"H, 82"H
42"W for
36"W opening

Note: Nominal heights of "P" low profile panels with glides full retracted are 2" less than heights listed above.

Panels

Panels

Tackable Acoustic


- Concensys Panels are 2 1/8" thick and available in 5 heights / 7 widths — add 1/8" for each end cover.
 - Frame designed with 4-sided, welded tubular steel.
 - Acoustical panels meet BIFMA recommendations.
 - Acoustical panels meet or exceed GSA standards.
 - Due to panel width, back-to-back data modules should not be used at beltline or in the base.
 - Add 2 1/4" to panel run for each "L", "T", "X" or extended straight connector.
 - Concensys Panels offer low profile painted/aluminum "P" top caps.
- Note:** Actual panel height varies depending on position of leveling glides (2 1/4" vertical adjustment).

NOMINAL PANEL HEIGHT	TOP CAP OPTION "P"
32"	30 3/8" – 32 7/8"
43"	40 3/8" – 43 3/8"
56"	53 3/8" – 56 3/8"
69"	66 3/8" – 69 3/8"
82"	79 3/8" – 82 3/8"

Maximum Receptacle Capacity in Panel Base Pathways

Widths	24	30	36	42	48	60
Maximum of 1 duplex per panel side		X				
Maximum of 2 duplexes per panel side			X	X	X	X

Concensys Tackable Super Acoustical design: 4-sided, welded, tubular steel panel frame.

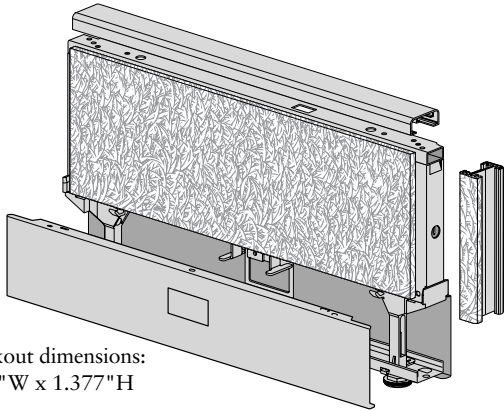

- Knockout dimensions: 2.700" W x 1.377" H

European and United Kingdom Kickplates:

- Kickplates are available with receptacle openings for European and United Kingdom receptacles.
- Please contact Customer Support for details.

Panel Specification and Installation Notes


Panel Door/Locksets

- Door is standard as right-hand; can be field modified to left-hand.
- Configure into layout as an 82"H x 42"W panel (can be wall mounted same as other panels).
- Height of door = 77 3/4". Access width = 36".
- Door surface is high pressure laminate; color must be specified.
- A panel connected to a door with a straight connector kit should be an 82"H panel.
- Order Lockset separately.
- Standard lockset finish: polished brass. Keyed — one side. Two keys provided.
- A commercially available lockset with a 2 3/4" set-back for a 1 1/2" thick door can be used.
- Lever-style lockset finish: brushed aluminum. Keyed — one side. Two keys provided.

Half-Glazed Panels

- Glass is clear, tempered safety glass.
- Bottom of glass is 29" above floor level with levelers fully retracted.
- Overhead storage components should be avoided on glazed and half-glazed panels.

For adequate stability, one of two methods of stabilization must be adhered to:

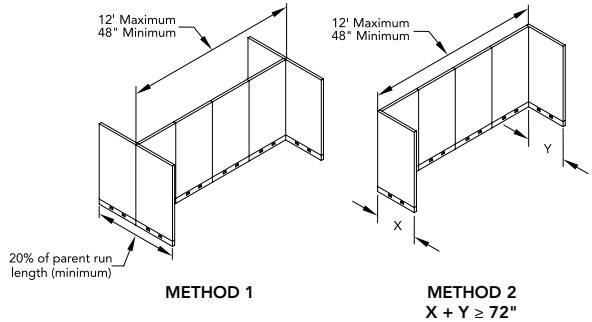

Method 1: A parent panel run must be a minimum of 48" and a maximum of 12', and must have a minimum of two return panels totaling 20% of the length of the parent run, extended in opposing directions on each side of the parent run.

Method 2: A parent panel run must be a minimum of 48" and a maximum of 12', and must have at least two return panels (one at the beginning and at the end of the parent run) totaling 60+% of the length of the parent run, extended in one direction. The minimum length of return panels should total 72".

Note

- Return panels must not be more than 26" shorter in height than the parent run.
- When using 120° connections, 12" must be added to the length of return panels as determined by methods 1 or 2.

(Refer to pages 15-16 when using stacking panels.)

Working with Stacking Panels

Frame Dimensions (Nominal)

- Height: 13"
- Width: 18", 24", 30", 36", 42", 48", 60"

Stacking Panels — Fabric


- Frame design with 4-sided, welded tubular steel.
- Utilizes top cap, attachment hardware, and screws from base panel installation.
- Can be added to any Concensys panel and door from 18" to 60"W.
- Must match base panel width.
- Specify connectors separately.
- End covers can be specified in full end height to include height of stacking panel or in 13"H.
- Maximum 2 high stackable.

Stacking Panel — Glass


- Clear, double-pane tempered safety glass inserts.
- Frame and components are painted black.
- For best aesthetics, use black painted stacking connectors.

Building Vertically with Concensys Stacking Panels


- No more than 2 stacking panels can be added to any straight base panel.
- Stacking panels accept overhead storage components (on the lower stacking panel). Refer to instruction sheet.
- Stacking panels can be used on any straight base panel. Adding stacking panels to 43"H, 56"H, and 69"H panels will maintain horizontal alignment between 56"H, 69"H, and 82"H panels, respectively. Horizontal alignment to other standard panel heights cannot be achieved with base support panels other than 43"H, 56"H, and 69"H. For example, stacking panels can be used on 32"H panels, but the resulting 45"H panel will not align horizontally with any existing standard panel height and is therefore not recommended. (See illustration below.)
- Variable height finish kit configurations must not exceed 39".
- Creating a variable height configuration will require a variable height kit.
- When adding a stacking panel to "fill in" an existing variable height configuration, additional connector brackets will be required.

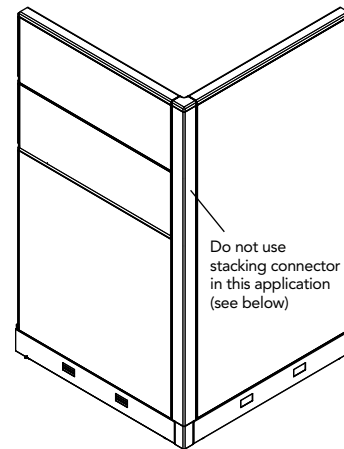

Base panel connectors must be the same height or taller than the tallest adjacent base panel. Substituting stacking connectors is not permitted.

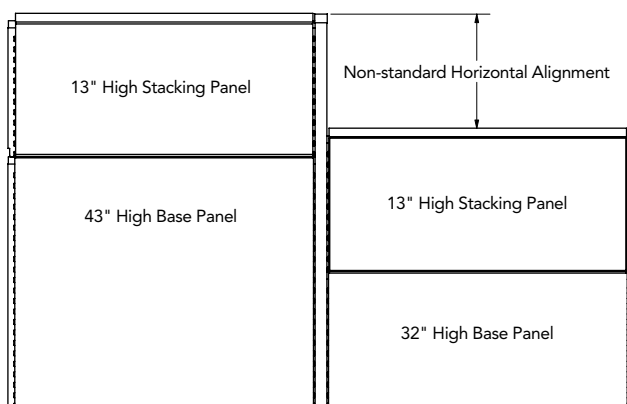


Not Recommended

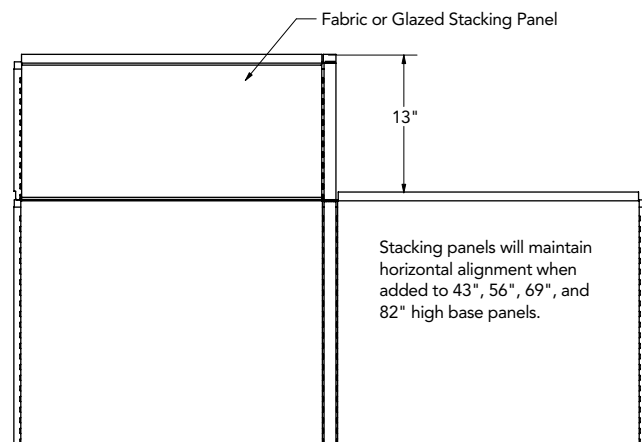


Recommended

Panels

Working with Stacking Panels (continued)

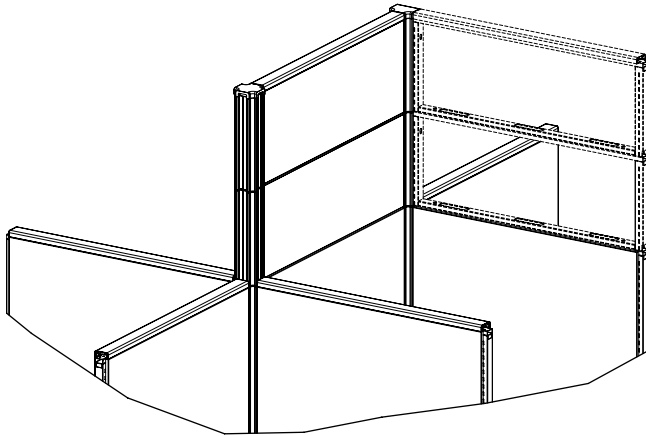


Single or double high stacking panel configurations must have adjacent return panels or full height connectors.

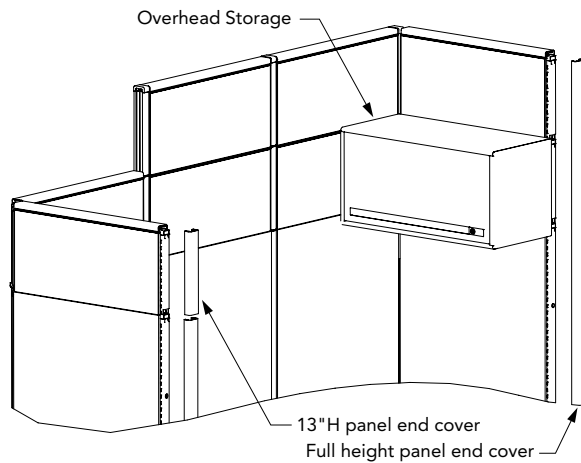

When using overhead storage on the end of a run, or on a return panel, a full height panel end cover is required for adequate stability.

When overhead storage is not used, a 13" panel end cover can be installed.

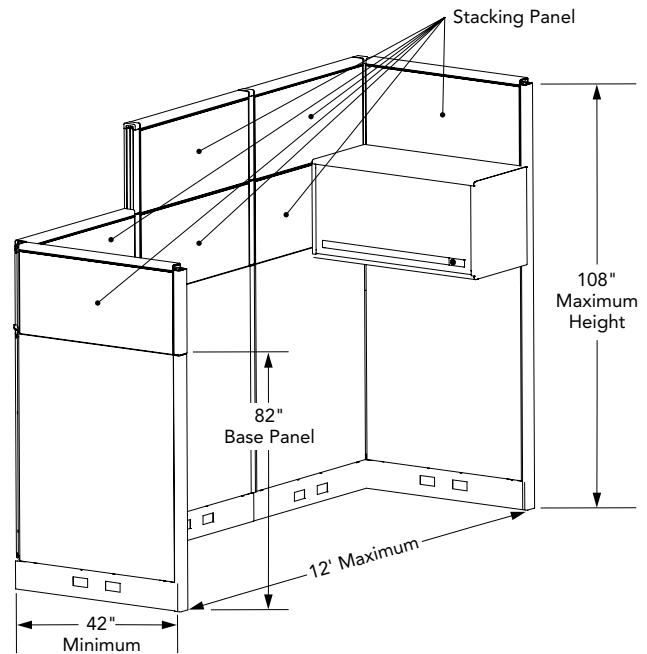

For adequate stability of Concensys panels with stacking panels resulting in an overall height above 82", one of the following methods of stabilization must be adhered to:

Method 1 — Refer to illustration above. The width of the parent panel run must be a minimum of 48" and a maximum of 12 feet and must have a minimum of two return panels that are a combined width of 42" wide, or wider, extending in opposing directions on each side of the parent run.

Method 2 — Refer to illustration above. The width of the parent panel run must be a minimum of 48" and a maximum of 12 feet and must have at least two return panels that are 42" wide, or wider, extending in one direction. The minimum length of return panels must total 84".

Note

- Return Panels must not be more than 26" shorter in height than the parent run.
- When using 120° connections, 12" must be added to the length of return panels as determined by methods 1 or 2.

Sliding doors for Concensys® are a great addition to any new or existing installations. The sliding door is system specific; one model for Concensys with specific mounting kits for each door ordered. With a Frosted Translucent insert and your choice of Core or Select paint, the sliding door will create a unique look for any office environment.




The sliding doors are available in 69" and 82"H models and can mount to 30", 36", 42", and 48"W panels. They accommodate a 36" W opening and are 42" W, nominally. The doors ship from the factory non-handed and become handed when field installed to fit the scope of the project. The handle pulls located on each side of the door are color matched to the trim to create a uniform style. And with the threshold free design, the offers better aesthetics and safety by eliminating the potential for tripping.

General Guidelines for Use of Sliding Door

- The system requires the ordering of both a door and a mounting bracket kit.
- The Door is system specific. The Concensys door works with Concensys only.
- All doors are 42" wide to accommodate a 36" W opening and are non-handed .
- A mounting bracket kit must be ordered for each door corresponding to the mounting panels width (30", 36", 42", or 48"W).
- Mounting bracket kits are system specific.

General Guidelines for Layout Planning of Sliding Door

- Stability guidelines must be followed when specifying a sliding door. (Refer to page 14). The sliding door system was designed to close an opening in a run of parallel panels. Doors mounted to long runs of panels without floor support, ties to worksurfaces, or return panels may seem less stable.
- If the door is used to close an opening (A) where the panel opposite the door is at 90°, there will be a gap equal to the panel thickness between the door and the panel end when closed.
- When planning the layout, care must be taken if the plan includes a door mounted on a panel that is less than 42" W. If the panel is at a corner (B), the door will protrude into the aisle or next workstation when in the open position.
- If back-to-back doors are mounted on panels (C) that are less than 42" W they will interfere with each if both are open at the same time.
- The door is attached at the base of the panel at any end position with a wrap around bracket. Bracket kits are ordered in conjunction with appropriate end trim profiles. The slots at the base of the panel must be clear (D) and cannot be utilized by worksurface supports or panel hung components.
- If the door is mounted to a panel run this is positioned adjacent to a wall (E) or an inside 90° angle and there is not a 42" clearance between the track and the wall/inside 90° the assembly of the first stop will be difficult and plans will need to be modified for the assembly.
- If a door is closing an opening of a workstation that includes a "T" connector in the opposite wall, an extended straight connector may need to be used to maintain the 36" required opening.

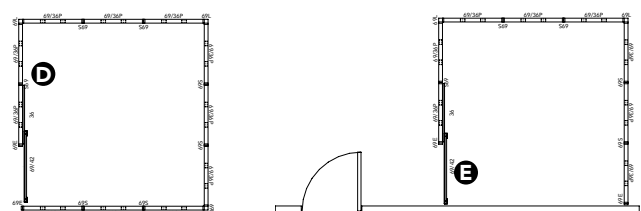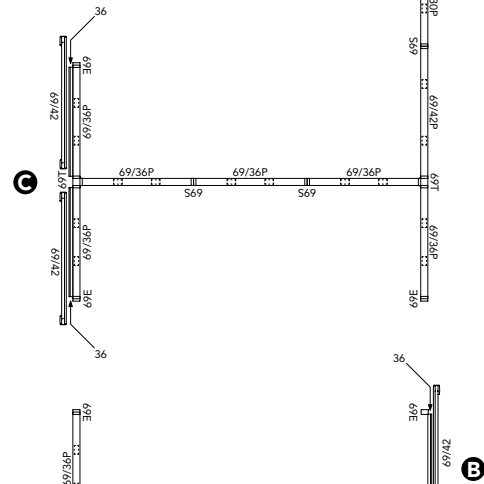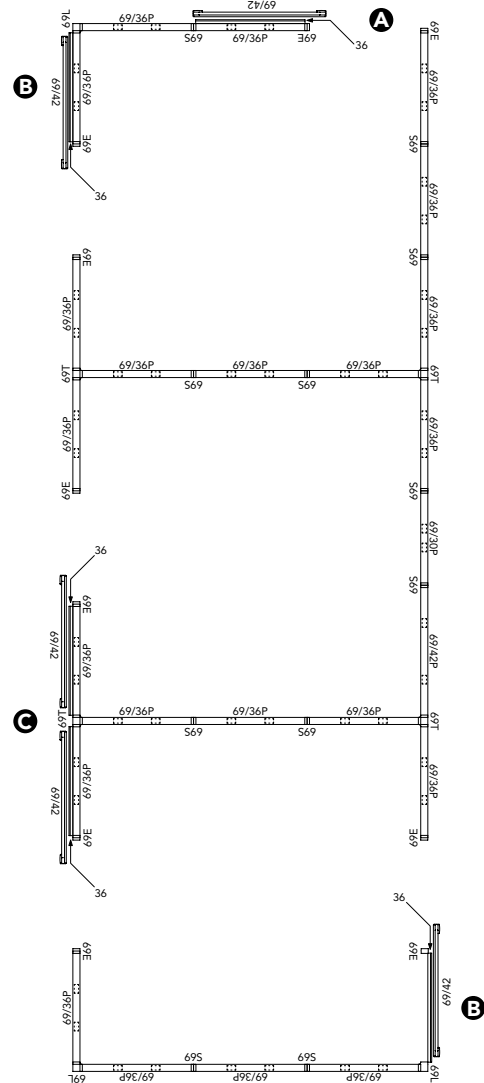

Panels

Panels and Doors

"P" Suffix Designates Top Cap Style:

"P" Suffix — low profile, painted top caps

- Concensys "P" top cap panels are 2" less than nominal heights listed with glides fully retracted. See page 19.
- Concensys panels are 2½" thick.
- Refer to page 31 for cable management capacities in Concensys panels.

Tackable Acoustical Panels (page 21)

- Actual panel height varies depending on position of leveling glides. Refer to page 19 for full details.
- Use of stacking panels on 32"H panels will result in non-standard height — will require use of 13"H stacking connectors.
- All standard connectors are compatible with non-tackable panels.

Stacking Panels (page 22)

- 13" in height.
- Available in the following seven widths: 18", 24", 30", 36", 42", 48", and 60".
- Specify connectors separately.
- Stacking panel utilizes top cap from base panel (no top cap designator required).
- A stacking panel directly attached to a base panel will support overhead storage components.
- Up to two stacking panels may be used on a base panel.
- Glass panels are clear double-pane inserts of tempered safety glass.
- Glass frame and components are painted black.
- Use of stacking panels on 32"H panels will result in non-standard height — will require use of 13"H stacking connectors.

Half-Glazed Panels (page 22)

- Actual panel height varies depending on position of leveling glides.
- Half-glazed panels can accommodate stacking panels.
- Half-glazed panels are constructed of clear, double-pane tempered safety glass.
- Glass framework is painted black.

Door Panel (page 23)

- Actual panel height varies depending on top cap selected and position of leveling glides.
- Door is standard as right-hand; can be field modified to left-hand.

Sliding Door (page 23)

- One specific door model for Concensys.
- Sliding doors available in 69"H and 82"H and can mount to 30", 36", 42", and 48"W panels of same height.
- Doors are 42"W to accommodate a 36"W opening.
- Order system specific mounting kit for each door ordered.
- Threshold free design for best aesthetics and safety — eliminates potential for tripping.
- Sliding door ships non-handed. Handles are field installed to L or R hand.
- Handle pulls on each side of door are color matched to trim.
- Available in Core and Select paint.
- Doors are available in Frosted Translucent insert material only.

Sliding Door Mounting Kits (page 23)

- Mounting kits are specific to each system.
- Concensys bracket kits accommodate all top cap trim options.
- Order to match the width of the panel on which the kit is hanging.
- Available in Core and Select paint.

Panel Connectors (page 24)

NOTE: Actual panel height varies depending on position of leveling glides ($2\frac{3}{4}$ " vertical adjustment).

NOMINAL PANEL HEIGHT	TOP CAP OPTION "P"
32"	$30\frac{1}{8}" - 32\frac{7}{8}"$
43"	$40\frac{5}{8}" - 43\frac{3}{8}"$
56"	$53\frac{5}{8}" - 56\frac{3}{8}"$
69"	$66\frac{5}{8}" - 69\frac{3}{8}"$
82"	$79\frac{5}{8}" - 82\frac{3}{8}"$


- Connector kits include all parts required for connecting and finishing — top bracket, vertical fabric-covered or painted filler, lower base plate filler, top cap trim, and necessary screws.
- "L", "X", "T", and extended straight connections provide space to pass a limited quantity of data cabling between the panel base pathway and top cableway.
- Add $2\frac{1}{4}$ " to overall length of run for each "L", "X", "T", or extended straight connection.
- Straight connector does not add to overall length of run.
- Add $\frac{1}{16}$ " to panel run for each panel mount-to-wall kit. Adds $\frac{15}{16}$ " when brackets are used for modularity.
- One carpet gripper is included with end connector kits.
- Porting is standard on all straight connectors.

Panel End Covers (page 25)

- Order panel end cover kits to finish the end of every panel run (except when attaching panels to permanent walls).
- Panel End Covers add $\frac{5}{8}$ " to length of run.
- Stacking panel end cover utilizes top cap from base panel end cap.

Panel Mount-To-Wall Kit (page 25)

- Anchor devices are not supplied with the permanent-wall panel connector kit. Refer to Concensys Installation Instructions for appropriate hardware.
- Adds $\frac{5}{8}$ " to length of run ($\frac{7}{8}$ " when mounted for modularity).

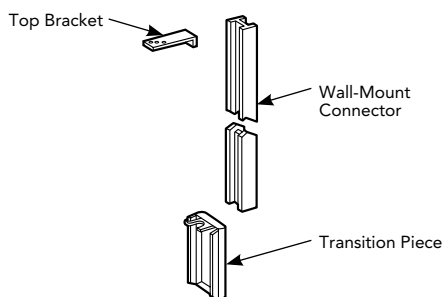

- Stacking panel wall mount kit utilizes top end cap from existing base panel wall mount.
- Black painted stacking wall mounting kit recommended for use with concensys glass stacking panels.

Stacking Connectors (page 24)

- Height: 13".
- Available in standard Concensys profiles. Straight, "L", "T", "X", extended straight, and end covers.
- Stacking connector profile must match base panel connector profile.
- Upholstered connectors used between upholstered stacking panels.
- Black painted connectors recommended between glass stacking panels.
- Supplied with a spacer to match connector profile and horizontal reveal space.
- Stacking connector utilizes top cap from base panel connector installation.
- Painted connectors are designed for use with glass stacking panels.
- Each 13"H connector supplied with a profiled spacer.
- Add $\frac{5}{8}$ " to panel width for each end cover.
- Add $2\frac{1}{4}$ " to panel run for each "L", "T", "X", or extended straight connector.
- 95" and 108" end connectors offered to support a single and double high stacking panel on an 82"H base panel. Not available in painted option.
- Use of stacking panels on 32"H panels will result in non-standard height — will require use of 13"H stacking connectors. See page 16.
- When stacking panel and connectors are added to existing base panels and connectors that also utilize integrated power poles, electrical and data wires must be pulled through the new stacking connectors.

Variable Height Finish Kits (page 26)

- Available in painted and fabric finish
- Must specify model for each variable height connection.
- Must order size that is equal to the difference in height between panels.

Tackboards (page 27)

- Use 13"H with half-height shelves hung on 56"H panels.
- Use 18"H with 69"H and 82"H panels.
- Tasklight cords can be concealed behind tackboards.
- Can only be used on one panel in a 90° junction.
- Brackets come attached for mounting.


How to Order Variable Height Connections
Using Variable Height Finish Kits

- For variable height panel connections.
 - 1) Order a standard connector kit straight, “L”, “T”, or “X” in the height and style of the tallest panel.
 - 2) Order the appropriate number of variable height finish kits.
- All variable height connection combinations can be accommodated by the models shown except as noted in the matrix below. Variable height panels cannot be connected to an extended straight connector.
- Low profile variable heights are ordered to finished height.


Variable Height Finish Kit Matrix					
		High Panel Height			
		82"	69"	56"	43"
Low Panel Height	32"		37"	24"	11"
	43"	39"	26"	13"	
	56"	26"	13"		
	69"	13"			

The examples below use 56"H and 43"H panels, reference above matrix to determine required height of finish kits for other height panels.

2-Way




1 "L" Connector Kit (height of tallest panel)
1 13"H Variable Height Finish Kit




1 Straight Connector Kit (height of tallest panel)
1 13"H Variable Height Finish Kit


3-Way "T"



1 "T" Connector Kit (height of tallest panel)
1 13"H Variable Height Finish Kit




1 "T" Connector Kit (height of tallest panel)
1 13"H Variable Height Finish Kit




1 "T" Connector Kit (height of tallest panel)
2 13"H Variable Height Finish Kits


4-Way "X"




1 "X" Connector Kit (height of tallest panel)
1 13"H Variable Height Finish Kit



1 "X" Connector Kit (height of tallest panel)
3 13"H Variable Height Finish Kits



1 "X" Connector Kit (height of tallest panel)
2 13"H Variable Height Finish Kits




1 "X" Connector Kit (height of tallest panel)
2 13"H Variable Height Finish Kits




Panels


Concensys® — Tackable Acoustical Panels




For specification information see pages 13-18.


GSA SIN 711-1







Nominal Height	Width	Model	List Price					
			Grade A	Grade B	Grade C	Grade D	Grade E	Grade F
32"H Panels								
32"	18"	893218P 	\$ 344	\$ 384	\$ 420	\$ 522	\$ 611	\$ 683
32"	24"	893224P 	\$ 379	\$ 421	\$ 461	\$ 581	\$ 681	\$ 762
32"	30"	893230P 	\$ 409	\$ 458	\$ 500	\$ 628	\$ 739	\$ 827
32"	36"	893236P	\$ 454	\$ 507	\$ 560	\$ 699	\$ 823	\$ 922
32"	42"	893242P	\$ 471	\$ 525	\$ 579	\$ 727	\$ 854	\$ 952
32"	48"	893248P	\$ 502	\$ 566	\$ 617	\$ 775	\$ 912	\$ 1021
32"	60"	893260P	\$ 565	\$ 635	\$ 697	\$ 872	\$ 1028	\$ 1149




43"H Panels								
43"	18"	894318P 	\$ 364	\$ 408	\$ 446	\$ 564	\$ 662	\$ 739
43"	24"	894324P 	\$ 396	\$ 443	\$ 484	\$ 609	\$ 717	\$ 801
43"	30"	894330P 	\$ 442	\$ 493	\$ 543	\$ 679	\$ 797	\$ 893
43"	36"	894336P	\$ 492	\$ 550	\$ 605	\$ 756	\$ 891	\$ 994
43"	42"	894342P	\$ 544	\$ 614	\$ 674	\$ 844	\$ 996	\$ 1111
43"	48"	894348P	\$ 579	\$ 649	\$ 711	\$ 891	\$ 1049	\$ 1174
43"	60"	894360P	\$ 669	\$ 750	\$ 824	\$ 1035	\$ 1219	\$ 1362



56"H Panels								
56"	18"	895618P 	\$ 393	\$ 437	\$ 479	\$ 600	\$ 706	\$ 792
56"	24"	895624P 	\$ 430	\$ 482	\$ 532	\$ 666	\$ 782	\$ 876
56"	30"	895630P 	\$ 484	\$ 542	\$ 597	\$ 748	\$ 883	\$ 986
56"	36"	895636P	\$ 542	\$ 606	\$ 658	\$ 819	\$ 962	\$ 1073
56"	42"	895642P	\$ 599	\$ 673	\$ 737	\$ 926	\$ 1093	\$ 1221
56"	48"	895648P	\$ 648	\$ 726	\$ 797	\$ 1000	\$ 1176	\$ 1315
56"	60"	895660P	\$ 707	\$ 794	\$ 872	\$ 1096	\$ 1289	\$ 1445



69"H Panels								
69"	18"	896918P	\$ 427	\$ 478	\$ 527	\$ 659	\$ 775	\$ 864
69"	24"	896924P	\$ 468	\$ 521	\$ 575	\$ 720	\$ 846	\$ 946
69"	30"	896930P	\$ 531	\$ 596	\$ 692	\$ 818	\$ 961	\$ 1075
69"	36"	896936P	\$ 593	\$ 663	\$ 724	\$ 900	\$ 1056	No
Match!								
69"	42"	896942P	\$ 656	\$ 735	\$ 806	\$ 1011	\$ 1189	\$ 1331
69"	48"	896948P	\$ 696	\$ 780	\$ 857	\$ 1072	\$ 1263	\$ 1413
69"	60"	896960P	\$ 761	\$ 856	\$ 937	\$ 1176	\$ 1385	\$ 1549





82"H Panels								
82"	18"	898218P	\$ 630	\$ 700	\$ 763	\$ 945	\$ 1103	\$ 1230
82"	24"	898224P	\$ 752	\$ 842	\$ 923	\$ 1159	\$ 1366	\$ 1529
82"	30"	898230P	\$ 808	\$ 910	\$ 995	\$ 1251	\$ 1471	\$ 1649
82"	36"	898236P	\$ 930	\$ 1041	\$ 1141	\$ 1432	\$ 1683	\$ 1884
82"	42"	898242P	\$ 979	\$ 1103	\$ 1211	\$ 1516	\$ 1812	\$ 1997
82"	48"	898248P	\$ 1074	\$ 1210	\$ 1329	\$ 1667	\$ 1961	\$ 2195

The panels on this page meet BIFMA recommendations for tackable acoustical panels.

Note: Actual panel height varies depending on position of leveling glides.

E All Concensys models are available in the **Everyday Advantage®** program, see page 10 for details.


<p>How to specify —</p> <p>Select the Concensys Low Profile Model Number from above.</p> <p>8 9 P . . P </p>	<p>1st Option:</p> <p>Fabric:</p> <p>See inside back cover for fabrics.</p>	<p>2nd Option:</p> <p>Paint:</p> <p> </p> <p>See inside front cover for finishes.</p> <p>For P2 Select Paints — add \$38.</p>
--	---	---

Examples: 893218P.CS928.P02 895618C.CS928.P27



 Shippable by small-package carrier.

For specification information see pages 13-18.


GSA SIN 711-1



NOTE:
Actual panel height varies depending on position of leveling glides.



Sliding Door



Bracket Kit

Description	Model	List Price		
		L1	L2	L3
Door Panel				
82"H x 42"W	898299P	\$ 2657	\$ 2788	\$ 2922

Description	Model	Core Paint	Select Paint
		P1 List Price	P2 List Price
Door Panel			
Standard Lockset (Door Knob)	899900	\$ 107	N/A
Note: Polished Brass; keyed on one side.			
Door Lever	899910	\$ 302	N/A
Note: Brushed Aluminum; keyed on one side.			

Concensys Sliding Door

69"H x 42"W for 36"W opening	C6942SD	\$ 3593	\$ 3665
82"H x 42"W for 36"W opening	C8242SD	\$ 4377	\$ 4449

Concensys Mounting Bracket Kit

30"W	CDMK30	\$ 431	\$ 448
36"W	CDMK36	\$ 431	\$ 448
42"W	CDMK42	\$ 431	\$ 448
48"W	CDMK48	\$ 431	\$ 448

E All Concensys models are available in the **Everyday Advantage®** program, see page 10 for details.

How to specify — Select the Concensys Model Number from above.	1st Option: Paint: See inside front cover for finishes.	2nd Option: Laminate: See inside front cover for finishes. For P2 Select Paint on Panel Door add \$52.	2nd Option: Insert (Sliding Door only): FT Frosted Translucent
<div> <div></div> <div></div> <div></div> <div></div> <div></div> <div></div> <div></div> <div></div> <div></div> <div></div> </div>	<div> <div>P</div> <div></div> <div></div> <div></div> <div></div> <div></div> <div></div> <div></div> <div></div> <div></div> </div>	<div> <div></div> <div></div> <div></div> <div></div> <div></div> <div></div> <div></div> <div></div> <div></div> <div></div> </div>	<div> <div>F</div> <div>T</div> </div>

Examples: 898299P.P27.TM33 899900 C6942SD.PR3.FT
CDMK30.PR3

Shippable by small-package carrier.







Connectors


Concensys® — Panel Connectors







For specification information see pages 19-20.

GSA SIN 711-1










Description	Painted Model	Fabric w/ Painted Top Cap Model	Painted List Price		Fabric List Price			
			Core	Select	Grades A/B	Grades C/D	Grades E/F	
Straight Panel Connectors — Painted and Fabric with Painted Top Cap								
13"H	801013	 801013F	\$ 40	\$ 51	\$ 43	\$ 52	\$ 59	
32"H	802032P	 801032P	\$ 76	\$ 96	\$ 76	\$ 88	\$ 102	
43"H	802043P	 801043P	\$ 76	\$ 96	\$ 76	\$ 88	\$ 102	
56"H	802056P	 801056P	\$ 81	\$ 101	\$ 81	\$ 93	\$ 107	
69"H	802069P	 801069P	\$ 81	\$ 101	\$ 81	\$ 93	\$ 107	
82"H	802082P	 801082P	\$ 101	\$ 121	\$ 101	\$ 114	\$ 128	










90° "L" Panel Connectors — Painted and Fabric with Painted Top Cap							
13"H	801113	 801113F	\$ 63	\$ 74	\$ 69	\$ 81	\$ 94
32"H	802132P	 801132P	\$ 114	\$ 134	\$ 114	\$ 136	\$ 152
43"H	802143P	 801143P	\$ 114	\$ 134	\$ 114	\$ 136	\$ 152
56"H	802156P	 801156P	\$ 138	\$ 158	\$ 138	\$ 160	\$ 176
69"H	802169P	 801169P	\$ 138	\$ 158	\$ 138	\$ 160	\$ 176
82"H	802182P	 801182P	\$ 158	\$ 178	\$ 158	\$ 181	\$ 200









3-Way "T" Panel Connectors — Painted and Fabric with Painted Top Cap							
13"H	801213	 801213F	\$ 80	\$ 91	\$ 86	\$ 101	\$ 119
32"H	802232P	 801232P	\$ 201	\$ 221	\$ 201	\$ 244	\$ 281
43"H	802243P	 801243P	\$ 201	\$ 221	\$ 201	\$ 244	\$ 281
56"H	802256P	 801256P	\$ 219	\$ 239	\$ 219	\$ 262	\$ 299
69"H	802269P	 801269P	\$ 219	\$ 239	\$ 219	\$ 262	\$ 299
82"H	802282P	 801282P	\$ 261	\$ 281	\$ 261	\$ 307	\$ 346





4-Way "X" Panel Connectors — Painted and Fabric with Painted Top Cap							
13"H	801313	 801313F	\$ 80	\$ 91	\$ 86	\$ 101	\$ 119
32"H	802332P	 801332P	\$ 201	\$ 221	\$ 201	\$ 244	\$ 281
43"H	802343P	 801343P	\$ 201	\$ 221	\$ 201	\$ 244	\$ 281
56"H	802356P	 801356P	\$ 219	\$ 239	\$ 219	\$ 262	\$ 299
69"H	802369P	 801369P	\$ 219	\$ 239	\$ 219	\$ 262	\$ 299
82"H	802382P	 801382P	\$ 261	\$ 281	\$ 261	\$ 307	\$ 346




Extended Straight Panel Connectors — Painted and Fabric with Painted Top Caps							
13"H	801713	 801713F	\$ 115	\$ 126	\$ 126	\$ 147	\$ 174
32"H	802732P	 801732P	\$ 287	\$ 307	\$ 287	\$ 351	\$ 407
43"H	802743P	 801743P	\$ 287	\$ 307	\$ 287	\$ 351	\$ 407
56"H	802756P	 801756P	\$ 350	\$ 370	\$ 350	\$ 414	\$ 470
69"H	802769P	 801769P	\$ 350	\$ 370	\$ 350	\$ 414	\$ 470
82"H	802782P	 801782P	\$ 435	\$ 455	\$ 435	\$ 513	\$ 579

E All Concensys models are available in the **Everyday Advantage®** program, see page 10 for details.

How to specify — Select the Concensys Model Number from above.	1st Option: Fabric (if applicable): See inside back cover for fabrics.	2nd Option: Paint:   See inside front cover for finishes.
	*For P2 Select Paints: – add \$11 for Fabric w/Painted Top Cap – add \$20 for Painted Models	

8 | 0 | | | | P | . | | | | | . P | | |

Examples: 801032P.CS928.PR3 802056P.P28


 Shippable by small-package carrier.

Connectors


Concensys® — End Covers / Wall Mount Kits







For specification information see pages 19-20.


GSA SIN 711-1














	Description	Model	List Price			
			Grades A/B	Grades C/D	Grades E/F	
Panel End Covers — Fabric						
E	13"H	801413F	S	\$ 43	\$ 52	\$ 59
E	32"H	801432P	S	\$ 76	\$ 88	\$ 102
E	43"H	801443P	S	\$ 76	\$ 88	\$ 102
E	56"H	801456P	S	\$ 81	\$ 93	\$ 107
E	69"H	801469P	S	\$ 81	\$ 93	\$ 107
E	82"H	801482P	S	\$ 101	\$ 114	\$ 128
E	95"H	801495P	S	\$ 115	\$ 131	\$ 149
E	108"H	801408P	S	\$ 138	\$ 156	\$ 176





Description		Model	List Price
Panel End Covers — Painted			
E	13"H	801413 	\$ 40
E	32"H	801832P 	\$ 76
E	43"H	801843P 	\$ 76
E	56"H	801856P 	\$ 81
E	69"H	801869P 	\$ 81
E	82"H	801882P 	\$ 101



Description	Painted Model	Fabric w/ Painted Top Cap Model	Painted List Price		Fabric List Price			
			P1 Core	P2 Select	Grades A/B	Grades C/D	Grades E/F	
Panel Mount-to-Wall Kit — Painted and Fabric with Painted Top Cap								
32"H	802532P 	801532P 	\$ 165	\$ 185	\$ 165	\$ 191	\$ 224	
43"H	802543P 	801543P 	\$ 165	\$ 185	\$ 165	\$ 191	\$ 224	
56"H	802556P 	801556P 	\$ 176	\$ 196	\$ 176	\$ 202	\$ 235	
69"H	802569P 	801569P 	\$ 176	\$ 196	\$ 176	\$ 202	\$ 235	
82"H	802582P 	801582P 	\$ 222	\$ 242	\$ 222	\$ 249	\$ 289	



Description	Model		Painted List Price		Fabric List Price		
			P1 Core	P2 Select	Grades A/B	Grades C/D	Grades E/F
Stacking Wall Mounting Kit							
13"H — Painted	801513		\$ 114	\$ 125	—	—	—
13"H — Fabric	801513F		—	—	\$ 131	\$ 148	\$ 167

E All Concensys models are available in the **Everyday Advantage®** program, see page 10 for details.

How to specify — Select the Concensys Model Number from above.	1st Option: Fabric: See inside back cover for fabrics.	2nd Option: Paint: C S See inside front cover for finishes. For P2 Select Paints — add \$11 for models 8014XX; add \$20 for models 8018XX.
<div style="border: 1px solid black; height: 20px; width: 100%;"></div>	<div style="border: 1px solid black; height: 20px; width: 100%;"></div>	<div style="border: 1px solid black; height: 20px; width: 100%;"></div>

Examples: 801432P.CS928.P4J 801832P.P4J

S Shippable by small-package carrier.













For specification information see page 19.

GSA SIN 711-1 and 711-2



Specify panel fabric

GSA SIN 711-1, 711-2

Description	Model	List Price			
		Grades A/B	Grades C/D	Grades E/F	
Tackboards					
24"W x 13"H	861324		\$ 120	\$ 154	\$ 209
30"W x 13"H	861330		\$ 144	\$ 185	\$ 252
36"W x 13"H	861336		\$ 161	\$ 207	\$ 287
42"W x 13"H	861342		\$ 182	\$ 235	\$ 321
48"W x 13"H	861348		\$ 200	\$ 257	\$ 358
60"W x 13"H	861360		\$ 223	\$ 289	\$ 397
24"W x 18"H	861824		\$ 120	\$ 154	\$ 209
30"W x 18"H	861830		\$ 144	\$ 185	\$ 252
36"W x 18"H	861836		\$ 161	\$ 207	\$ 287
42"W x 18"H	861842		\$ 182	\$ 235	\$ 321
48"W x 18"H	861848		\$ 200	\$ 257	\$ 358
60"W x 18"H	861860		\$ 223	\$ 289	\$ 397

 All Concensys models are available in the **Everyday Advantage®** program, see page 10 for details.

<p>How to specify —</p> <p>Select the Concensys Model Number from above.</p> <div style="border: 1px solid black; height: 20px; width: 100px; margin-top: 10px;"></div>	<p><i>1st Option:</i></p> <p>Fabric (if applicable):</p> <p>See inside back cover for fabrics.</p> <div style="border: 1px solid black; height: 20px; width: 100px; margin-top: 10px;"></div>
--	--

Example: 861324.CS918

 Shippable by small-package carrier.

Electrical & Data

Concensys® — Working with Electrical

[GSA Reference Page](#)

To Order:

1. Determine which electrical system you will use after consulting your electrician and computer support personnel:
 - The four-circuit system
 - (4-Hot/2-Neutral/2-Ground)
 - 3 + 1 option
 - 2 + 2 option
 - The three-circuit system
 - (3-Hot/3-Neutral/2-Ground)
2. Determine location, quantity and circuit of

3. duplexes.
3. Determine the appropriate choice and use of isolated, isolated/dedicated and separate neutrals circuits.
4. Specify appropriate power harnesses* and pass-thru cables.*
5. Determine the location, quantity and type of power in-feed needed.

* Select power harness models (A8712XX),

Pass-thru cables (A8710XX) and pass-thru harness (A8711XX) with the last two digits corresponding with the panel width into which the component is to be positioned. The initial cable length can be stretched approximately 3" to transverse "T", "X", "L" and extended straight connectors.


Flexconnect™ Electrical System Options

The four-circuit, eight-wire electrical system is widely specified and trusted by hundreds of thousands of end-users. This proven system delivers four circuits for every power infeed in either a 3 + 1 or 2 + 2 configuration. The isolated/dedicated circuits are ideal for sensitive computing equipment, while the common circuits are suitable for faxes, copiers, task lights and other peripherals. Both the 3 + 1 and 2 + 2 systems use the same pre-wired components, making it easy to adjust as electrical needs change.


You can also choose a three-circuit, eight-wire system that has a dedicated neutral for every hot circuit. The three-circuit components have model numbers with an "A" suffix and appear in a gray box in this pricer.

All three systems utilize an eight-wire electrical system rated at 20 amps per circuit (15 amps Canadian). Concensys panels and electrical components are UL listed and CSA certified.


Four-circuit, 3 + 1 Receptacle Option

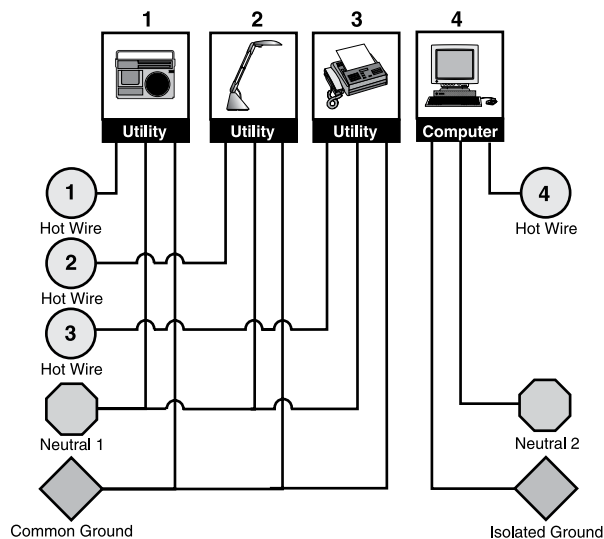


The 3 + 1 option is the electrical standard used on Allsteel systems for many years in most installations. This wiring option provides three utility circuits plus an isolated/dedicated circuit for more sensitive equipment. Circuit 2 (one of the 3 common circuits sharing a neutral wire) cannot be used with single-phase building electrical supply.

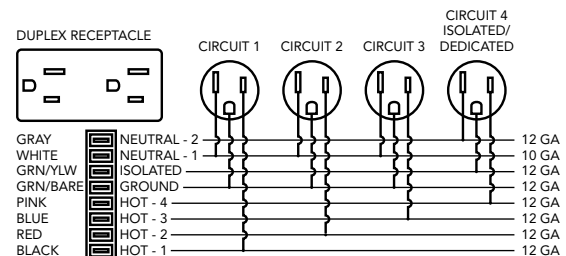


Four-circuit, 2 + 2 Receptacle Option

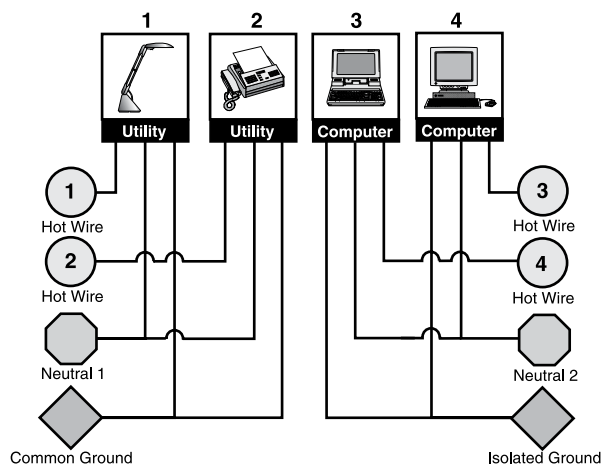


The 2 + 2 option is a wiring option that provides two utility circuits and two isolated circuits for more extensive computer usage applications.

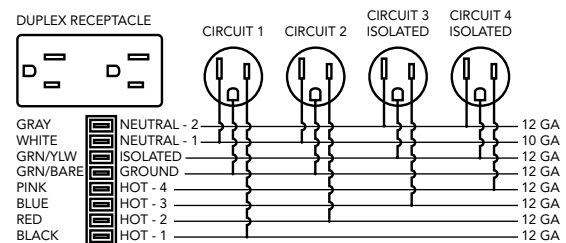

Three-circuit, separate neutrals

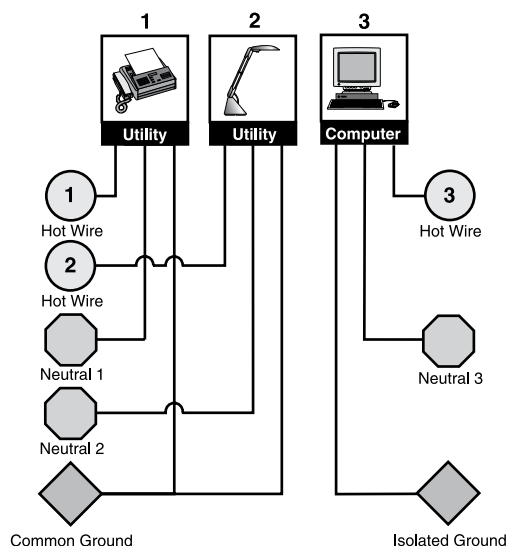

The three-circuit, separate neutrals configuration is a wiring option that provides separate neutrals for each of the three circuits. Two circuits share a common ground, and one circuit is isolated/dedicated. The three-circuit components have model numbers with an "A" suffix.

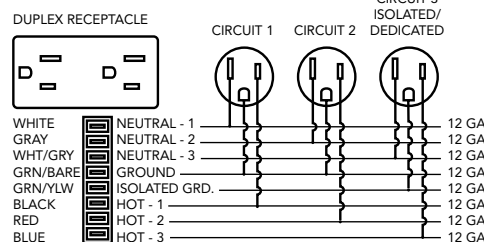

Concensys Receptacle Usage

Two 8-wire, 20 amp (15 amp Canadian) electrical systems are offered					
Electrical System	Circuitry	Receptacle Capacity			
Four-circuit 4 Hot/2 Neutral/2 Ground	3 + 1	Common Circuit-1 A871501	Common Circuit-2 ⁽¹⁾ A871502	Common Circuit-3 A871503	Iso/Dedicated Circuit-4 A871504
	2 + 2	Common Circuit-1 A871501	Common Circuit-2 A871502	Isolated Circuit-3 A871506	Isolated Circuit-4 A871504
Three-circuit 3 Hot/3 Neutral/2 Ground		Common Circuit-1 A871501A	Common Circuit-2 A871502A	Iso/Dedicated Circuit-3 A871503A	N/A

(1) Circuit-2 (one of the 3 common circuits sharing a neutral wire) cannot be used with a single-phase building electrical supply.


Notes:

- Four-circuit components and three-circuit components (with suffix "A") cannot be used together.
- Components of the two systems are keyed differently to prevent components of one system being connected to components of another system.
- Allsteel model numbers are printed on the UL labels, and components are color-coded to provide visual identification of the different components.
- Four-circuit components have black plastic parts.
- Three-circuit components have rust-colored terminal ends and receptacle backs are rust colored.


Typical power usage by the most commonly specified office equipment.

EQUIPMENT	AMPS	EQUIPMENT	AMPS	EQUIPMENT	AMPS
Computers		Copiers		Fax Machines	
Personal Computer.....	3	Desktop Copier	15	InkJet Fax	less than 1
Notebook Computer.....	3	Console Copier	20	Plain Paper Fax	8
Monitors		Copier/Duplicator		Task Lights	
13" Color Monitor	2	Printers		30" T5 Fluorescent	0.12/bulb
17" Color Monitor	3	InkJet	less than 1	60" T5 Fluorescent	0.24/bulb
21" Color Monitor	4	Personal Laser or LED	8	<i>Source: Industry Analysis, Inc., Rochester, NY</i>	
15" Plasma Monitor	0.5	Workgroup Laser or LED	15		
20" Plasma Monitor	1				

Duplex Receptacles



15 amp Receptacle

20 amp Receptacle
(Required by some large copiers.)

Electrical & Data

Concensys® — Working with Electrical

[GSA Reference Page](#)

Concensys Electrical Applications


- Concensys panels are UL 1286 Listed.
- Electrical components are UL Listed and CSA Certified.
- It is the customer's responsibility to ensure that use of the pre-wired electrical system, the number of receptacles used on a given circuit, and connection to a building power source, be in compliance with all local and national electrical codes.

- A licensed electrician must make connections to a building electrical supply.
- To power all panels at a "T" connection, at least one power harness must be used; at a "X", at least two power harnesses must be used.
- Harnesses will stretch up to 3½", to span an extended straight panel connection.
- When multiple 18"W panels are connected at a "T" or "X" connection, an additional 18"W pass-thru cable is required.

- Use power harnesses in all panels adjacent to 18"W panels.
- Pedestals and lateral files, positioned under worksurfaces, may render some receptacles inaccessible, and may prohibit use of grommets.
- Four-circuit components and three-circuit components (with suffix "A") cannot be used together.


Definitions of components:

Electrical Power Harness

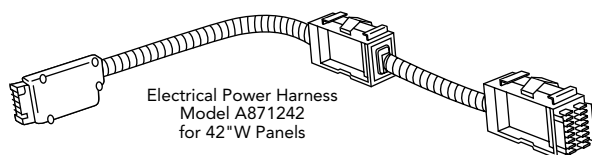

- Used to distribute power in panels 24"W and wider.
- Can be mounted in the base pathway.
- Power distribution in either direction.
- Specify power harness to match panel width.
- Double-sided: receptacles can be inserted into both sides of power blocks.
- Use power harnesses in all panels configured adjacent to 18"W panels (if panel run is to be electrified).


Electrical Pass-Thru Cables



Pass-Thru Cable Without Duplex Capacity:

- For use in 18"W panels or when no receptacle is required. Specify to panel width.
- Cable length cannot be stretched.
- Allows power distribution through panels where receptacles cannot be positioned.
- When multiple 18"W panels are connected at a "T" or "X" connection, an additional 18"W pass-thru cable is required.

Electrical Pass-Thru Harnesses

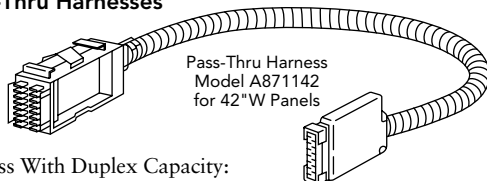

Pass-Thru Harness With Duplex Capacity:

- For use in 24"W and wider panels.
- Use in panels where multiple receptacles are not required.
- Use when specifying both data and electrical at beltline height.
- Added feature: has capacity for one receptacle on each side of a panel. Feature offers future expansion and is an alternative to power harnesses.


Electrical Jumper Cables

- Jumper cable plugs into power block end of electrical power harness or electrical pass-thru harness.

All electrical power harnesses and pass-thru harnesses will stretch 3½" to span intersections and connections. Jumpers span from beltline to baseline, around corners, and back to beltline.


Duplex Receptacles

- 15-amp outlet configuration.
- Models A871601 and A871601A have a 20-amp outlet configuration required by some large copiers.
- Fit back-to-back into the power block(s) of power and pass-thru harnesses.
- Labeled with the provided circuit. Circuits connected to the Isolated Ground are identified with an orange triangle; circuits that do not share a neutral or ground have an orange circuit number.



Power In-Feed Base/Ceiling Models A879072, A879072A, A879168, and A879168A

- Used to connect the panel electrical system to the building electrical supply Model A879168 or A879168A is used to connect to the building electrical supply, in a ceiling plenum area. Power pole A870070 must be ordered separately.
- A licensed electrician must make connections to a building electrical supply.
- Plugs into any receptacle position; can be rotated left or right.
- Conduit is UL Listed, black, liquid-tight conduit (outside diameter is 7/8").

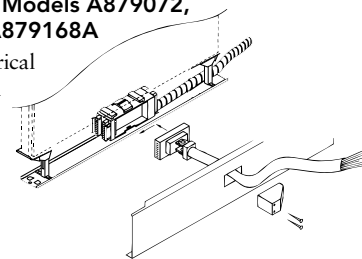

Power In-Feed Model A871972 and A871972A

- Used to connect the panel electrical system to the building electrical supply.
- A licensed electrician must make connections to a building electrical supply.
- Plugs into the end of a power block. The end-of-panel base pathway cover can be field cut to provide an access port.
- Model uses UL recognized flex-cable conduit — no portion can be left exposed after installation.

Power In-Feed Models A871912, A871912A, A871918, and A871918A

- Used to connect the panel electrical system to the building electrical supply, in a ceiling plenum area. Power pole A870071 must be ordered separately.
- A licensed electrician must make connections to a building electrical supply.
- Plugs into the end of a power block.
- Models use UL recognized extra-flex conduit.







Illustration is representative of all A8719XX models

Note: In-feed cables listed above may be field-cut to desired length. Remove UL Listing/Schematic label and reposition onto the usable length.

In-Feeds

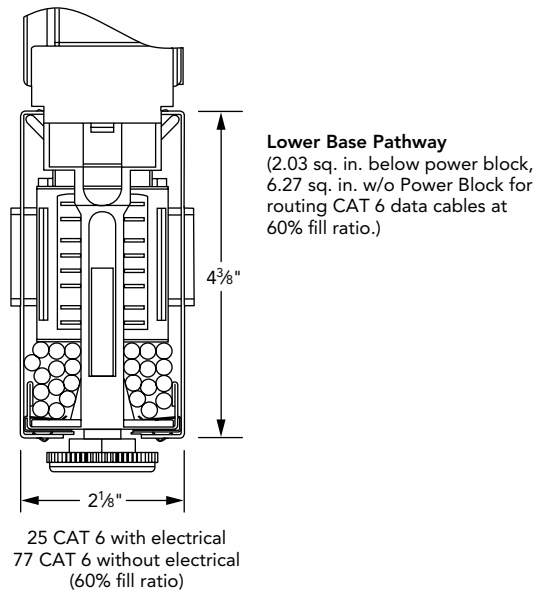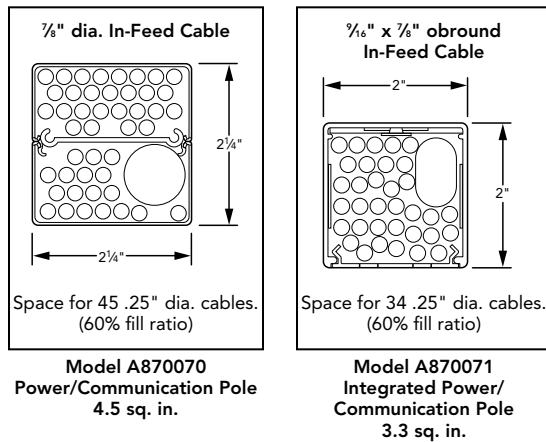

Knockout dimensions:
2.700"W x 1.377"H



Base pathway covers with additional knockouts are available for improved utilization of power and data.

Electrical

Electrical Components — Concensys (pages 28-29)

- Four-circuit components and three-circuit components (with suffix “A”) cannot be used together.

Electrical Power Harness (page 34)

- Harness will stretch up to 3½" to span a “T” or “X” connection, by stretching.
- Has an extra terminal connection that pass-thru cables do not have (increases connection capacity — required at some “T”/“X” junctions).
- Use power harness in all panels configured adjacent to 18"W panels (if panel run is to be electrified).
- To power all panels at a “T” connection, at least one power harness must be used; at a “X”, at least two power harnesses must be used. An additional power harness is required when using an integrated power pole.

Electrical Pass-Thru Harness (page 34)

- Used to distribute power in panels 24"W and wider.
- Receptacles can be inserted into both sides of power block(s).
- Harnesses will stretch up to 3½" to span “T” and “X” connections.

Jumper Cables (page 34)

- Electrical jumper cable plugs into power block end of electrical power harness or electrical pass-thru harness.

Electrical Pass-Thru Cable (page 34)

- Used to distribute power in panels where receptacles are not required.

Dual Electrical Eight-circuit Power Harness Kit (page 34)

- Kit provides back-to-back four-circuit systems giving double the capacity of harness and pass-thru cables.
- Requires two four-circuit in-feeds.
- Uses four-circuit receptacles.
- Four-circuit components and three-circuit components (with suffix “A”) cannot be used together.
- Models must be positioned “back-to-back” in the panel — single-side use is not permitted
- Components can only be routed in a single run — a single run cannot branch to multiple panel runs at “T” and “X” junctions.
- Four-circuit jumper cables (A8713xx) can only be connected to a power block at one end of a run — power cannot be routed between a run in the base pathway area and a run in the beltline area, except at one end of the run.
- Standard four-circuit pass-thru cables (A8710xx) can be used in between power harnesses. Two are required in the back-to-back configurations.
- Models can be connected to standard four-circuit power harnesses and pass-thrus, although it is not recommended because of possible circuit number ambiguity

- Two power infeeds are required to connect the back-to-back runs. Power infeed A8719xx must be connected to a power block at the end of a run.
- Data faceplates and terminals cannot be positioned in a panel into which back-to-back power harnesses are installed.

Duplex Receptacles (page 35)

- Receptacles are marked with circuit number.
- A871601 and A871601A have a 20 amp plug configuration.

Power In-feed Cables (page 35)

- A879072 and A879168 can be plugged into any power block.
- Conduit length: base in-feed is 6' long, integrated ceiling in-feed is 12' or 18' long and ceiling in-feed is 14' long.
- Ceiling in-feed (A879168) can be used with power pole model A870070.
- Integrated ceiling In-feed cable connects to a prewired electrical harness in the panel base pathway, transverses through the panel connector, and terminates in the junction box at the top of the integrated power pole.

Hardwire Applications (page 35)

- Used when local electrical codes require hardwire entry.
- A871400 or A871400A mounts into panel 30-60"W. When used in 30"W or 36"W panels, power can be routed in only one direction. When used in wider panels, a pass-thru cable for that panel width can be used to route power back in the opposite direction.

Pull-up Receptacle (page 35)

- 6' cord w/plug; circuit breaker; mounts in worksurface grommets.
- May interfere with the placement of optional pedestals.
- Included grommet may not match Allsteel worksurface grommets.

Power/Data Dome (page 35)

- Fits into existing grommet hole to provide two surface mounted receptacles and two data ports.
- May interfere with the placement of optional pedestals.
- Can be mounted into field-cut, 2¼" diameter hole.
- 6' black power cord.
- 2 simplex receptacles and 2 data positions.
- Includes adapters to allow use of commercially available data terminals or blanks to fill unused openings.
- Many of the AMP, AT&T, Krone, Leviton, and other commercially available data terminals can be used — terminals must be of a design that will snap into .695 x .650, .590 x .790, or .590 x .750 openings, in .064 max. thick faceplates.

(continued on next page)

Electrical *(continued)*

Power/Communication Pole (page 36)

- Double cavity used to route in-feed cable 879168 from ceiling to panel base pathway.
- Conduit of the in-feed cable serves as the division of electrical and communications cabling.

Integrated Power/Communication Pole (page 36)

- Installs into 43-82" high or 13"H stacking 90°, "T", and "X" connections.
- In addition to ordering the power pole, an appropriate trim/connector kit must be ordered.
- To power the prewired electrical system, from a ceiling power source, a ceiling in-feed cable, model A871912, A871912A, A871918, or A871918A, must be purchased separately.
- Single cavity with removable cover.
- Field-cut to desired length.
- Outside dimension = 2" square.
- For applications requiring integrated power poles longer than 78", an extension kit is available. Contact Allsteel Customer Support for information.
- Not to be used with 120° or 135° connectors.

Trim/Connector Kits (page 36)

- Kit consists of:
 - Panel Top Transition Piece
 - 4" x 4" Junction Box and Cover
 - Drop-Ceiling Trim Plates
 - Panel End Brackets
 - Hardware Pack
- A wood option is not available: use a Flint colored model 87007XP.
- Can function at variable height junctures.

Concensys Connector Bracket Kit (page 36)

- Used to increase vertical cable capacity through the panel connectors
- Increases vertical wire capacity on a single "T" or "X" connector.

Data Port Kit (page 36)

- Allows field installation of additional data ports to Concensys technology panels.
- Knockout dimension: 2.700"W x 1.377"H.

Wireway Grommet (page 36)

- Fits into any receptacle opening.
- Used when routing wires through receptacle opening.

Wire Management Channel (page 36)

- Self-adhesive backing to attach to panels and underside of worksurfaces.
- Contains two cavities for routing wires.
- Note: Each cavity provides space for a maximum of six .25" Dia. cables. Total capacity = 1 sq. in.

Cable Management Tray (page 36)

- Attaches under the worksurface to contain cables. Hardware included.
- Metal tray shelf is 4" deep. Can hold most electrical power strips and/or surge protectors.

Cord Retainer Clip (page 36)

- Provides confinement of vertical electrical/data wiring.
- 1½"H cord clips snap into vertical panel slots to contain cords.
- 4 clips are provided standard with each tasklight cord.
- Package of 50. Black only.

Cord Organizer (page 36)

- Attached to bottom of worksurface.
- 4"W x ¾"D, made from sheet metal.
- Top sits flush with worksurface if mounted to worksurface.
- 4 cable cut outs: 2 – .250" diameter and 2 – 0.147" diameter; .250" diameter cut outs are centered between the .147" diameter cut outs.

Base Pathway Covers (page 37)

- Features an additional knockout for improved utilization of power and data. Knockouts are 2.700"W x 1.377"H.

Data Faceplates (page 37)

- Fit into receptacle and data port openings in panel base pathway covers, or into data port (CDP).
- Due to panel depth, back-to-back data modules should not be used at beltline or in the base.


Specialized electrical may be available through Allsteel Tailored Products Group.

For specification information see pages 28-33.


GSA SIN 711-1



Each marked with Circuit Number.



Use when local codes require.



Description	Four-circuit 3 + 1 2 + 2	Three-circuit Separate Neutrals	List Price
Duplex Receptacles			
Circuit 1	A871501	A871501A	\$ 42
Circuit 2	A871502	A871502A	\$ 42
Circuit 3 (except 2+2 – see below) iso/dedicated	A871503	A871503A	\$ 42
Circuit 3 (2+2)	A871506		\$ 42
Circuit 4 — iso/dedicated circuit	A871504		\$ 42
Circuit 1 (20 amp outlet configuration)	A871601	A871601A	\$ 42

Power In-feed Cables

Base Receptacle In-feed (6' long conduit) (Sealtight Cable — 7/8" diameter)	A879072	A879072A	\$ 248
Ceiling In-feed (14' long conduit) (Sealtight Cable — 7/8" diameter)	A879168	A879168A	\$ 598
Base In-Feed (6' long conduit) (Flex Cable)	A871972	A871972A	\$ 188
Integrated Ceiling In-Feed (12' long conduit) (Flex Cable)	A871912	A871912A	\$ 254
Integrated Ceiling In-Feed (18' long conduit) (Flex Cable)	A871918	A871918A	\$ 319

NOTE: For use with integrated power pole model A870071.


Hardwire Applications

Hardwire Power In-Feed	A871400	A871400A	\$ 243
Hardwire Junction Box (6-pack)	A871500	N/A	\$ 523


NOTE: Junction box can be positioned at any duplex receptacle location. Customer must furnish conduit, wiring, and designer-type receptacles. Not for use at beltline in technology panels. (Approved for use by city of Chicago.)

Receptacle Color Recommended to Coordinate with Paint Color

Paint Color	Recommended Receptacle Color
Carob — P52	Black — E4
Champagne Metallic — PR5	Muslin — EU
Fossil — P28	Flint — E9
Gunmetal Metallic — PR3	Brownstone — EY
Parchment — P93	Muslin — EU
Platinum Metallic — PR2	Loft — EV



Black only



Black only

Description	Model	List Price
Pull-up Receptacles		
Three 15 amp Simplex Receptacles (Black only)	A870300	\$ 220
Power/Data Dome		
2 simplex receptacles and 2 data positions (Black only)	A870301	\$ 213

E All Concensys models are available in the **Everyday Advantage®** program, see page 10 for details.





How to specify — Select the Concensys Model Number from above. _____ .	1st Option: Electrical Receptacle Color (if applicable): See inside front cover for finishes. E	1st Option: Color (if applicable): P Black P
---	---	--

Examples: A871501.EU A879072.P A871400.P A870300.P

S Shippable by small-package carrier.

For specification information see pages 28-33.

GSA SIN 711-1



Description	Model	Core Paint P1 List Price	Select Paint P2 List Price
Base Pathway Covers — with additional knockout			
36" W	CBPLATE3-36	\$ 58	\$ 70
42" W	CBPLATE3-42	\$ 60	\$ 72
48" W	CBPLATE3-48	\$ 63	\$ 75
60" W	CBPLATE3-60	\$ 73	\$ 85

AMP Data Faceplates

Three-Port Flex-Mode Faceplate, Black (E4)	ATADF3 S	\$ 22	N/A
Four-Port Flex-Mode Faceplate, Black (E4)	ATADF4 S	\$ 22	N/A

Note: ATADF3 can install up to 3 jacks (CAT 3, 5E, or 6). TADF4 can install 4 jacks (CAT 3, 5E, or 6).

Jacks

AMP RJ45 CAT 5E Jack — Black only (AMP model # 1116604-2) Toolless	ATADJ5 S	\$ 43	N/A
AMP RJ45 CAT 6 Jack — Black only (AMP model # 1375055-2) Requires Tool	ATADJ6 S	\$ 57	N/A

E All Concensys models are available in the **Everyday Advantage®** program, see page 10 for details.

<p>How to specify —</p> <p>Select the Concensys Model Number from above.</p>	<p>1st Option:</p> <p>Paint (Base Pathway Cover only):</p> <p>C S</p> <p>See inside front cover for finishes.</p>	<p>1st Option:</p> <p>Data Faceplate Color:</p> <p>E4 Black</p>
<div style="border-bottom: 1px solid black; width: 100px; margin: 0 auto;"></div>	<div style="border-bottom: 1px solid black; width: 100px; margin: 0 auto;"></div>	<div style="border-bottom: 1px solid black; width: 100px; margin: 0 auto;"></div>


Examples: CBPLATE3-36.P28 ATADF4.E4

S Shippable by small-package carrier.


Worksurfaces

Add Suffix “N” to model number for no grommets, no upcharge.


Flat Edge

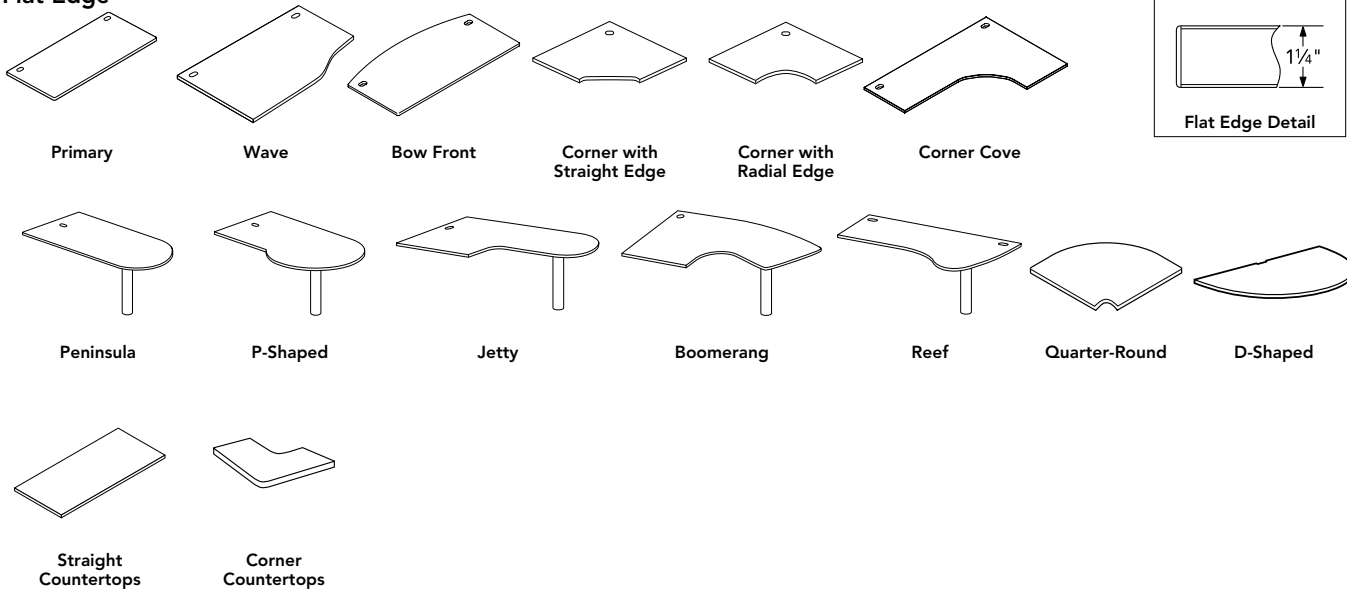


T-Mold Edge

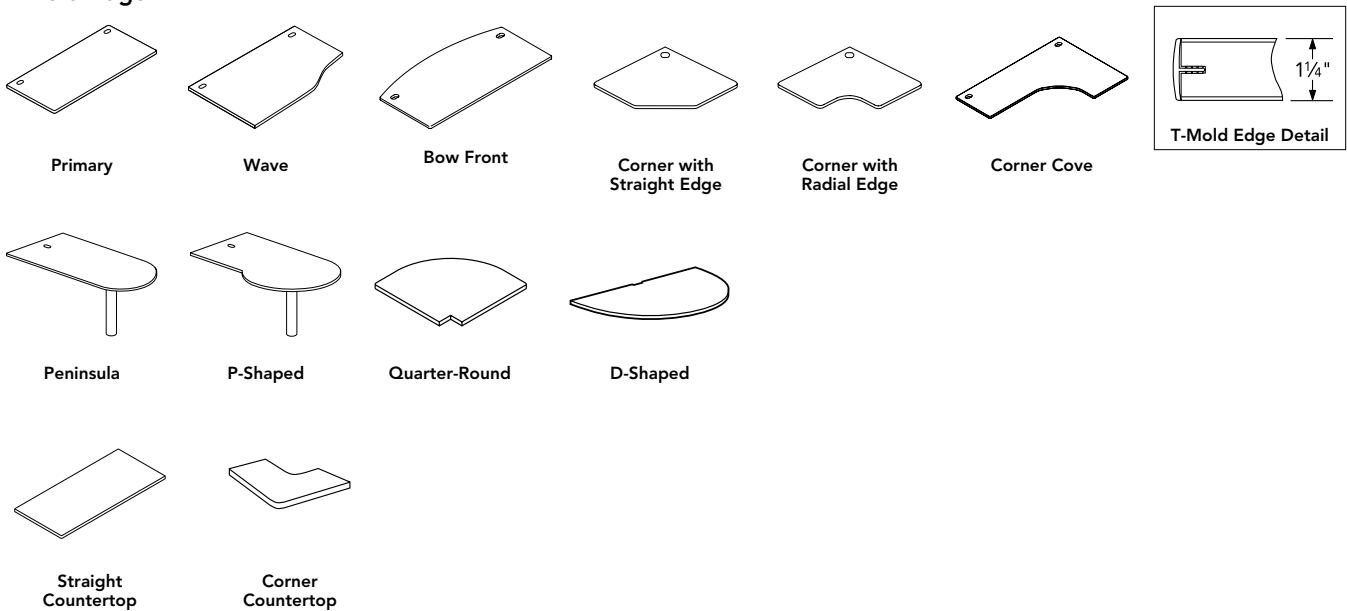


Primary Worksurface

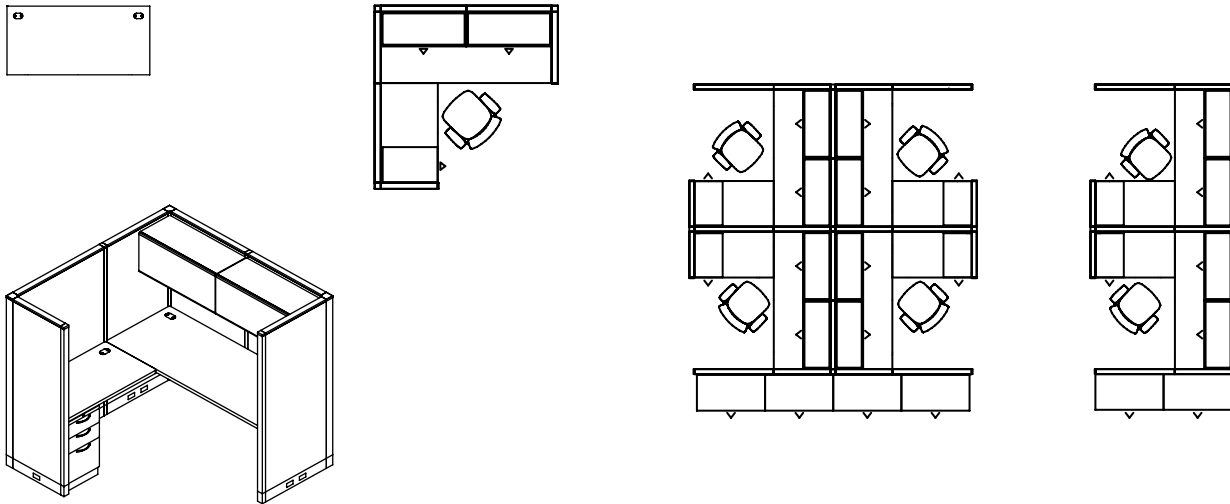

Corner Worksurface

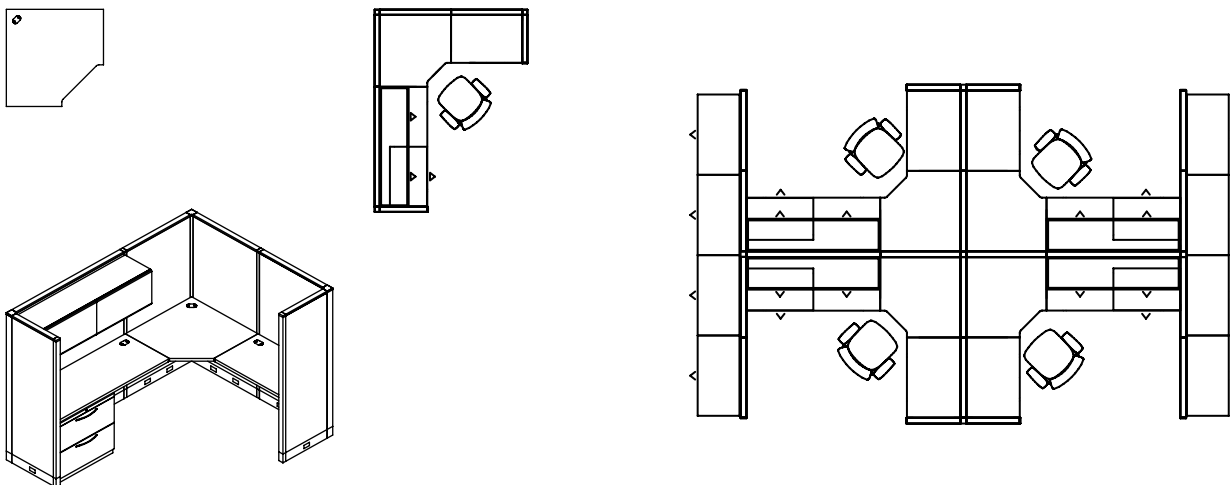


Cove Worksurface

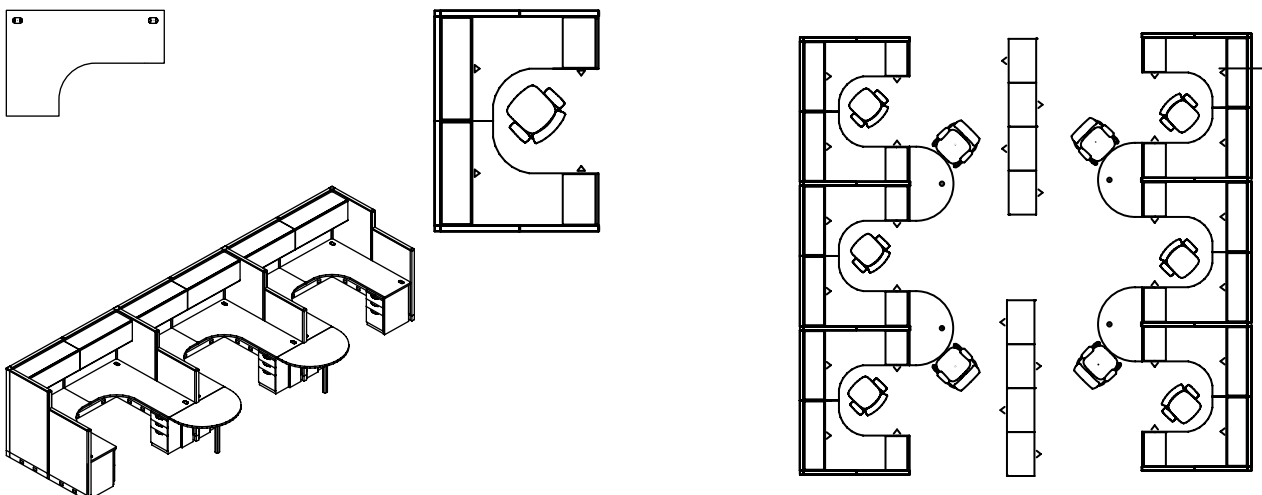


Note: Above Typical CAD files and BOM are available at www.allsteeloffice.com/TypicalsGallery.

Worksurfaces


Wave Worksurface

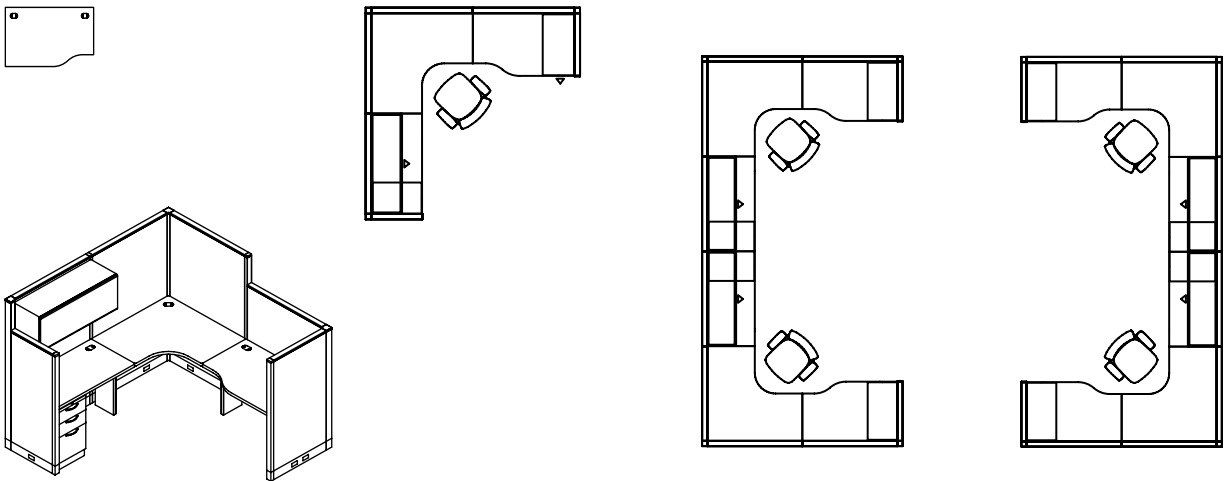

Peninsula Worksurface

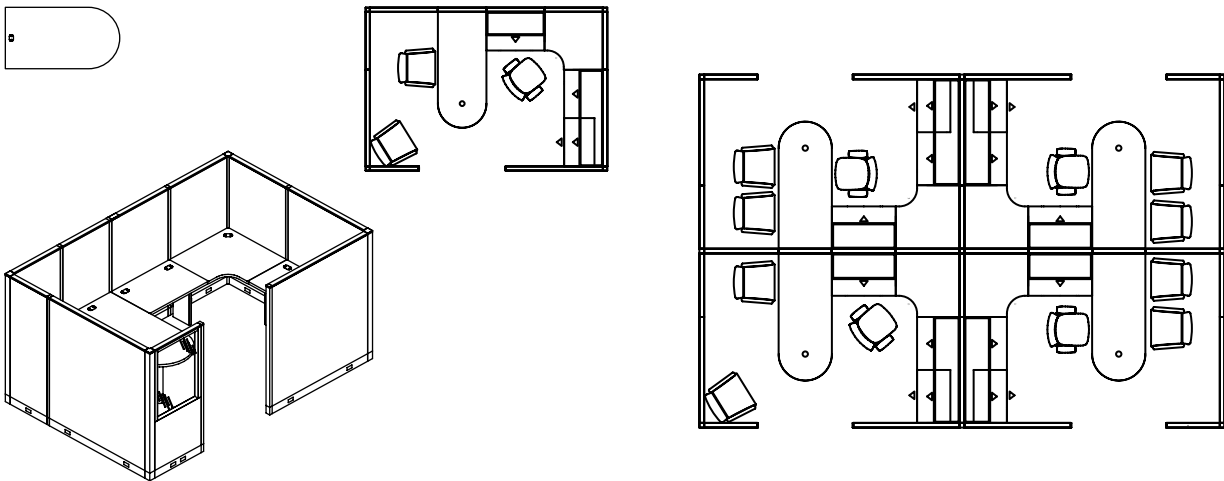


Countertop Worksurface

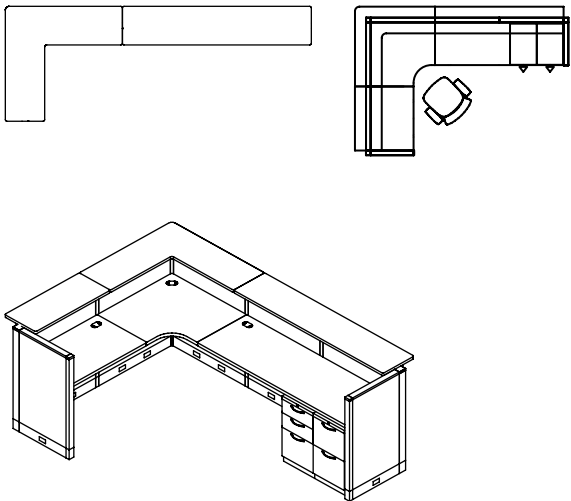


Note: Above Typical CAD files and BOM are available at www.allsteeloffice.com/TypicalsGallery.


Reef Worksurface

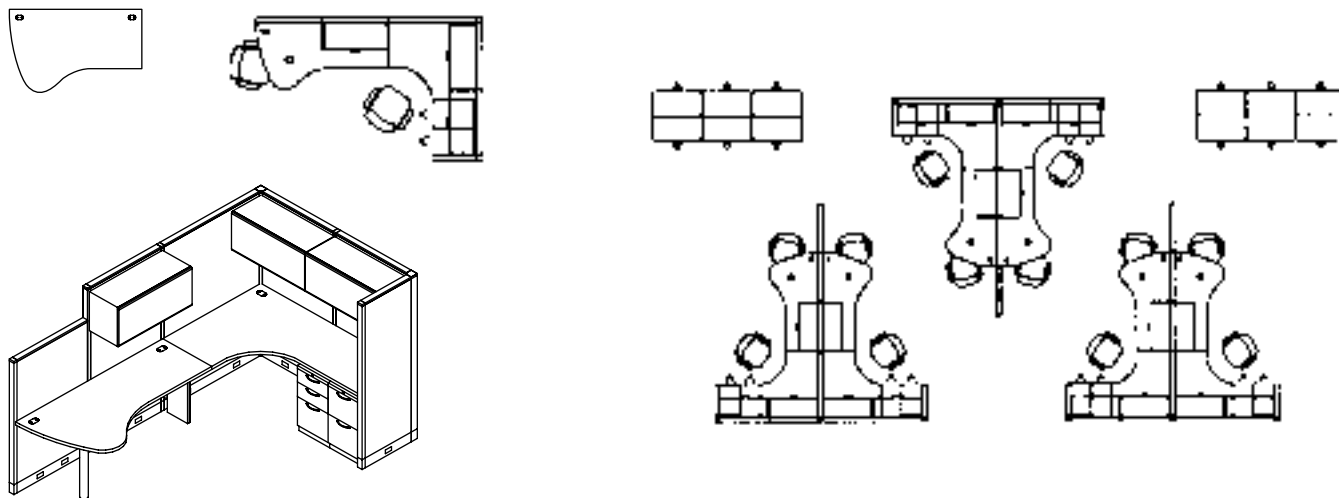

90° Boomerang Worksurface

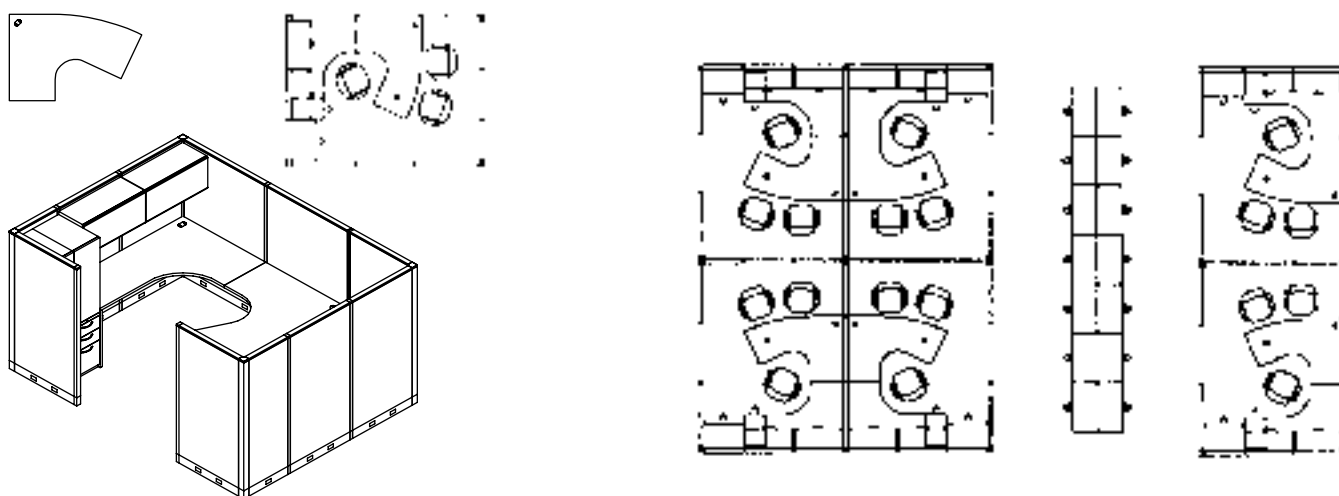



110° Boomerang Worksurface

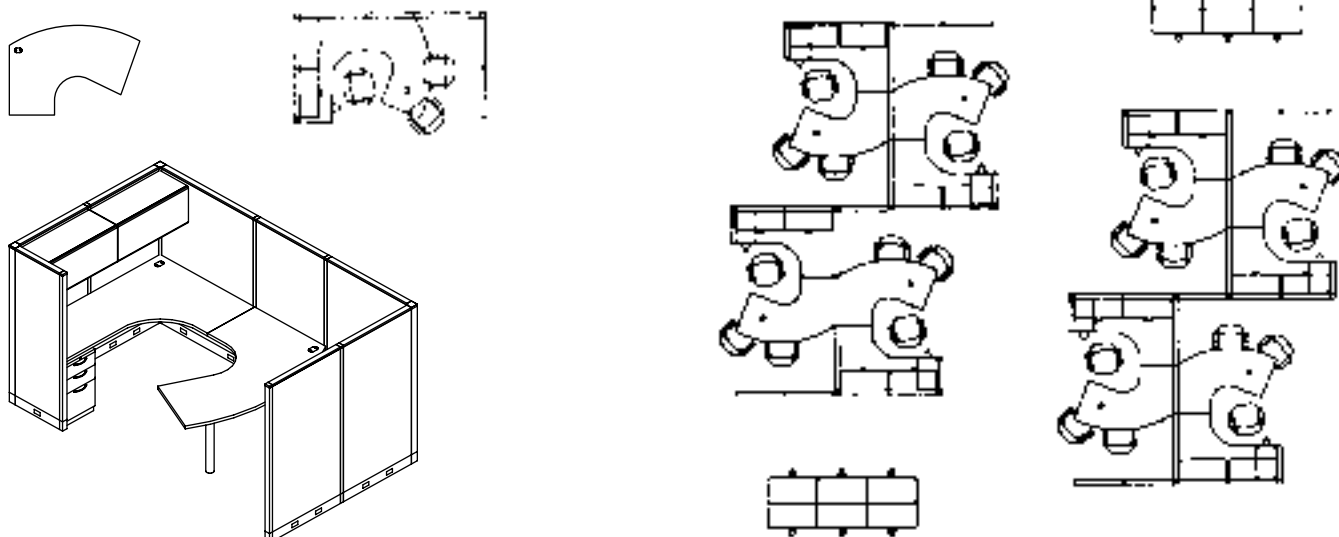



Note: Above Typical CAD files and BOM are available at www.allsteeloffice.com/TypicalsGallery.

Worksurfaces



Jetty Worksurface

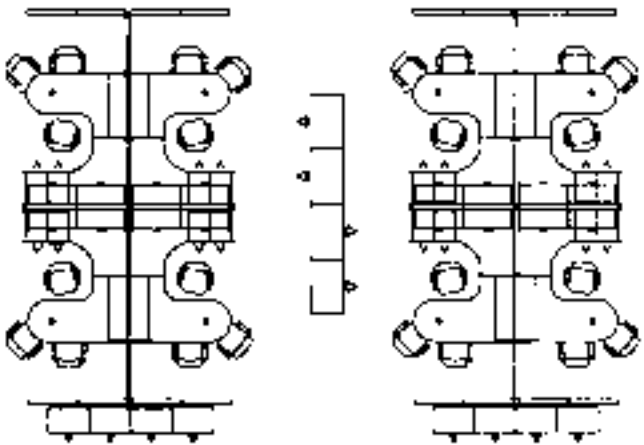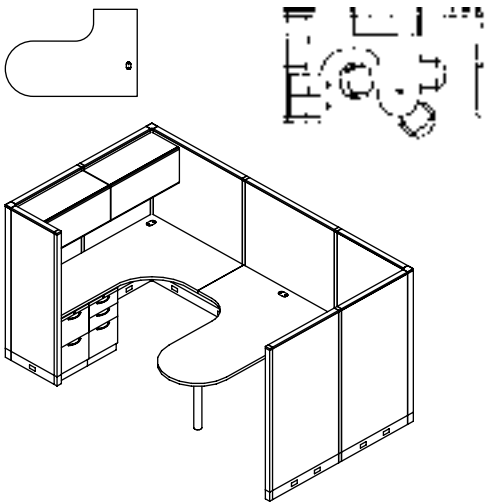

P-Shaped Worksurface

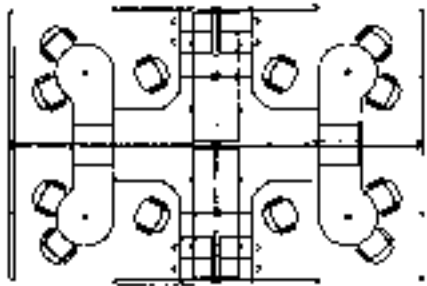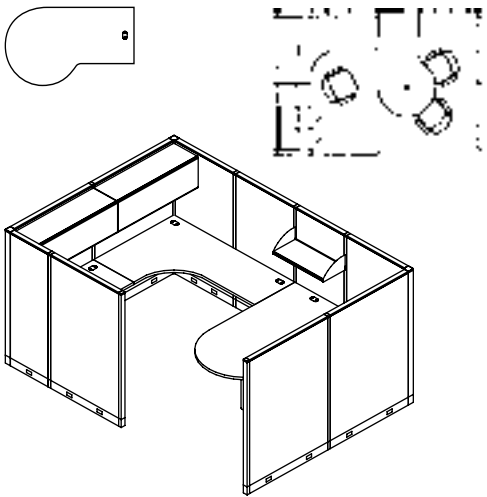

D-Shaped Worksurface

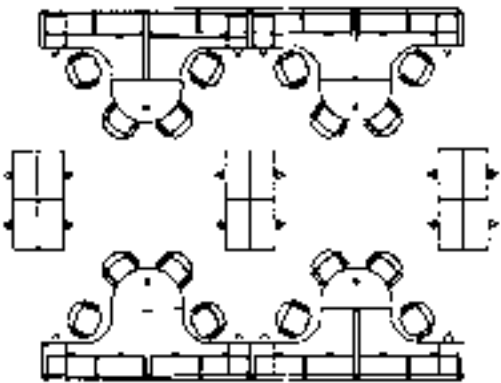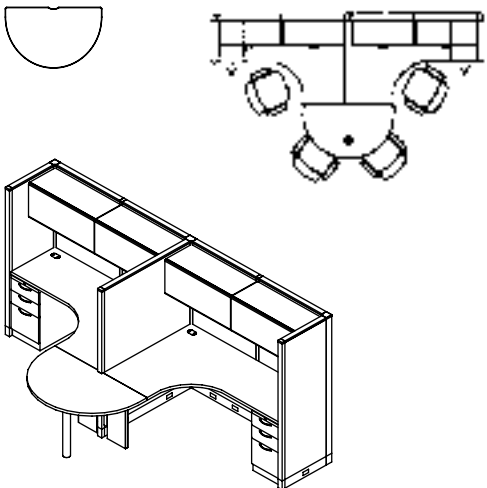



Note: Above Typical CAD files and BOM are available at www.allsteeloffice.com/TypicalsGallery.

Support Guidelines — See Drawings below


- Panel mounted worksurface runs 96" and greater need floor support for improved stability when overheads are not used.
- When using overheads in panel mounted worksurface run applications 72" and greater, floor support is required.
- When using overheads at the end of a panel run, floor supports are required.
- Worksurface bracket kit should be used to tie panels to worksurface for added stability.
- A return panel at the end of a panel run can be substituted with one of these floor supports: storage, open or closed end support panel, O-leg.
- Cantilever brackets cannot be used at the end of a worksurface

panel run in place of a return panel or floor support.



- Worksurface runs greater than 60"W require an external worksurface support channel when a center support cantilever cannot be used. It is recommended for spans greater than 48"W. See pages 46 and 56.
- Support channel may interfere with mounting of some CPU holders and keyboard supports.
- Cantilevers are recommended in place of an external worksurface support channel where feasible.
- Cadence Desking configurations utilize modesty panels and gussets in place of external support channels for worksurfaces up to 72"W. See pages 47-55.

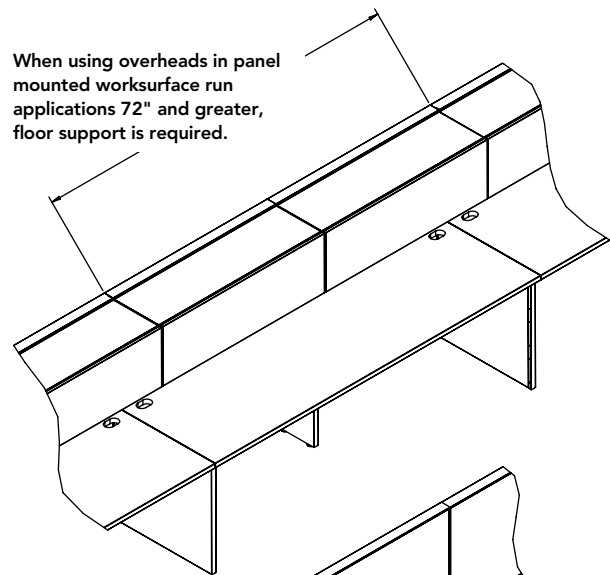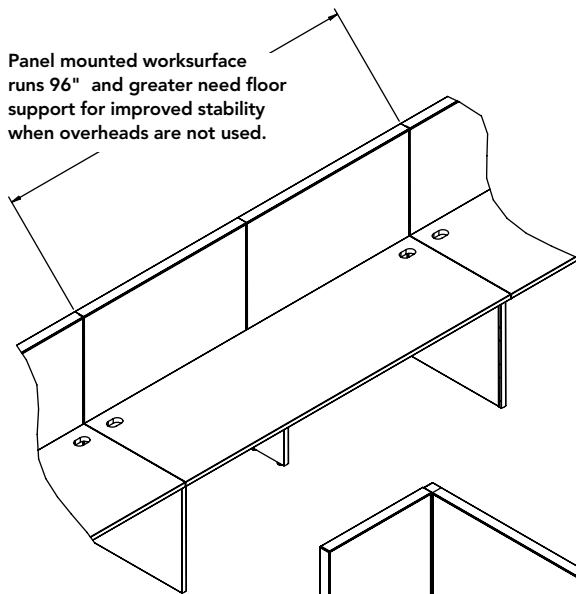

Worksurface bracket kit should be used to tie panels to worksurface for added stability



Cantilever brackets cannot be used at the end of a worksurface panel run in place of a return or floor support.

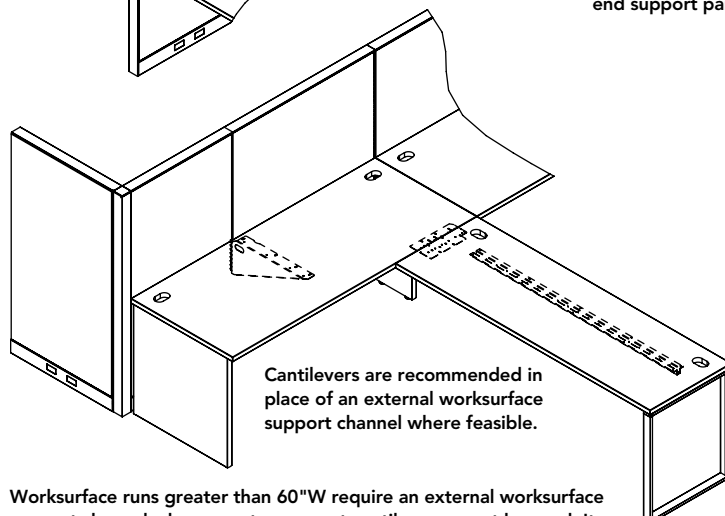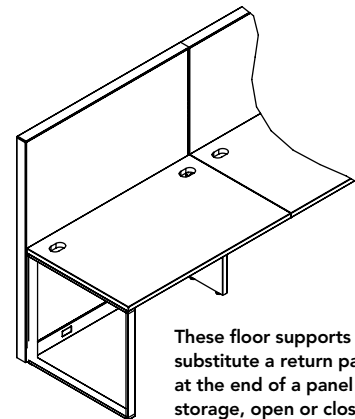

Worksurface runs greater than 60"W require an external worksurface support channel when a center support cantilever cannot be used. It is recommended for spans greater than 48"W. See pages 46 and 56.

Flat and T-Mold Edge Worksurfaces

Worksurfaces (pages 56-72)

- Worksurfaces can be specified without grommets by adding suffix “N” to model number for no grommet, no upcharge.

Primary Worksurfaces (pages 56 and 66)

- 24", 30", and 36" W worksurfaces have one grommet, centered; two on widths 42" W and greater.
- Width must correspond with panel width(s). For worksurface to span a “T” or extended straight connection add “T” suffix and upcharge. (All T-span worksurfaces are available in Express Solutions™ except 72" W models.)
- Center support bracket included on 54" W-60" W. Other support hardware is ordered separately.
- Worksurfaces greater than 60" W require a cantilever bracket for center support in panel mounted applications. Specify 18" cantilever on 20" D and 24" cantilever on 24" D and 30" D worksurfaces.
- Primary worksurfaces can be used with a modesty panel and appropriate supports to configure freestanding desk(s). Refer to Working with Cadence®, pages 47-53.

Wave Worksurfaces (pages 57 and 67)

- Wave worksurfaces may be used to transition from a 30" D worksurface to a 24" D worksurface. When used with a 24" D corner between two connecting 24" D wave edges, it provides a “cockpit” setting.
- 30" and 36" W worksurfaces have one grommet, centered. Wider worksurfaces have two grommets.
- Width must correspond with panel width(s).
- Center support bracket included on 54" W-60" W. Other support hardware is ordered separately.
- Worksurfaces 66" and over require a cantilever bracket for center support in panel mounted applications. Specify 18" cantilever on 20" D and 24" cantilever on 24" D and 30" D worksurfaces.
- Dimension “S” listed on pages 57 and 67 is the straight leading edge dimension available for storage.

Bow-Front Worksurfaces (pages 57 and 67)

- Standard with two wire management grommets.
- Wave and bow-front worksurfaces can be used with a modesty panel and supports to configure freestanding desk(s). Refer to Working with Cadence, pages 47-53.

Corner Worksurfaces (pages 58 and 68)

- Panel-hung application requires two panels of corresponding width joined at 90°.
- Leading edge dimensions:
Flat Edge —
 833624M = 16⅞" 834230M = 16⅞"
 834224M = 25⅝" 834830M = 25⅝"
 834824M = 33⅞"
T-Mold Edge —
 833624A = 16⅞" 834230A = 16⅞"
 834224A = 25⅝" 834830A = 25⅝"
 834824A = 33⅞"

- Rear corner support bracket included (left-handed). Worksurface bracket kit (order separately) required at junction where a panel is wall-mounted to a permanent wall and wall track stanchion is not positioned in the right hand corner.
- Leading edge of radial leading edge units has an inside radius of 10⅞".
- With woodgrain laminate, grain direction is diagonal to grain of adjacent worksurface(s).
- Corner worksurfaces can be used with a modesty panel and appropriate supports to configure freestanding desk(s). Refer to Working with Cadence, pages 47-53.
- One wire management grommet in corner standard.

Corner Shelves (pages 58 and 68)

- Diagonal leading edge = 10½"
- Diagonal depth = 22½"
- Includes panel attachment brackets.
- Laminate with flat or T-mold edge.

Corner Cove Worksurfaces (pages 59 and 69)

- Worksurfaces greater than 60" W require a cantilever bracket for center support in panel mounted applications. Specify 18" cantilever on 24" D, and 24" cantilever on 30" D worksurfaces.
- Standard with two wire management grommets.
- Corner cove worksurfaces can be used with a modesty panel and appropriate supports to configure freestanding desk(s). Refer to Working with Cadence, pages 47-53.
- Rear corner support bracket included (left-handed). Worksurface bracket kit (order separately) required at junction where a panel is wall-mounted to a permanent wall and wall track stanchion is not positioned in the right-hand corner.

Altitude® Height-Adjustable (page 59)

- For freestanding applications, see height-adjustable tables in the Seating, Collaboration, and Tables Price List.

(continued on next page)

Flat and T-Mold Edge Worksurfaces *(continued)*

Peninsula, P-Shaped, and Jetty Worksurfaces

(pages 60 and 70)

- Standard with one wire management grommet.
- Support column ordered separately, column includes panel support brackets 831099.
- Peninsula worksurface must correspond to the width of its support panel.
- Peninsula and P-shaped worksurfaces can also be attached perpendicularly to a primary worksurface using flat brackets. Do not attach to a worksurface supported with cantilever brackets.
- Worksurfaces can be used with a modesty panel and appropriate supports to configure freestanding desk(s). Refer to Working with Cadence, pages 47-53.

Boomerang Worksurfaces (page 60)

- Standard with one wire management grommet.
- Support column ordered separately, column includes panel support brackets 831099.
- Boomerang worksurfaces can be used with a modesty panel and appropriate supports to configure freestanding desk(s). Refer to Working with Cadence, pages 47-53.
- Available in flat edge only.

Reef Worksurfaces (page 61)

- Standard with two wire management grommets.
- Support column ordered separately, column includes panel support brackets 831099.
- Reef worksurfaces can be used with a modesty panel and appropriate supports to configure freestanding desk(s). Refer to Working with Cadence, pages 47-53.
- Available in flat edge only.

Quarter-Round Worksurfaces (pages 61 and 71)

- Connects two 90° panel-attached worksurfaces.
- Order support column and two flat brackets separately.

D-Shaped Worksurfaces (pages 61 and 71)

- Order support column and two 11"D end panels separately.
- Not recommended for use with cantilever brackets CCB24L or CCB24R for shared applications.
- Worksurface includes attachment brackets.
- Use only with other worksurfaces with matching edge.

Countertop Brackets (pages 62 and 72)

- Countertop brackets must be ordered separately. Model 851500 contains one right-hand and one left-hand bracket.
- Specify paint color.
- Order two model 851500 for straight countertops. Order three model 851500 for corner countertops.

Countertops (pages 62 and 72)

- Countertops cannot be used with 32"H panels.
- Corner countertops require two panels of corresponding width joined in an "L".

Non-Standard Worksurface Sizes (pages 64-65)

- The 9120 Program can be used to order particle board rectangular worksurfaces in any non-standard width and depth in ½" increments up to a maximum of 120"W x 36"D.
- Other modification requests should be made through Allsteel Tailored Products Group.

Supports

End-Panel Support (page 73)

- Non-handed for use at either end of worksurface.
- Levelers provide 1½" vertical adjustment.
- Must be connected into panel slots for panel-hung applications.
- Can be converted to freestanding with removal of panel-mount bracket.
- Straight worksurfaces adjacent to 120° and 135° connections must be supported by full end panels.
- 11"D models for use with D-shaped worksurfaces or curvilinear shaped worksurfaces in freestanding applications.

Support Leg (page 73)

- Non-handed for use at either end of worksurface. Leg portion is 12¾"D.
- Use in a shared position or at 90° panel junctions to support adjoining worksurfaces or to support a worksurface adjacent to a dual-surface worksurface.
- Flat bracket included.
- Levelers provide 1½" vertical adjustment.
- Must be connected into panel slots for panel-hung applications.
- Can be converted to freestanding with removal of panel-mount bracket.

Support Column (page 74)

- Used to support one end of curvilinear worksurfaces. (Includes panel support brackets.)
- Levelers provide 1½" vertical adjustment.

Permanent-Wall Hanger Kit (page 74)

- Mounts to permanent dry-wall to hang panel-hung components.
- Wall track has ⅝" x ½" slots on 1" centers.
- Customer to furnish connecting hardware. (Refer to Concensys Installation Instructions for appropriate hardware.)
- Worksurfaces should not be supported with cantilever brackets when using permanent-wall hanger kit.
- An integral channel is provided for vertically routing task light cords.
- Includes a cover for top of channel.

Cantilever Brackets (page 73)

- Use with runs less than 96". Floor support is required for runs 96" and longer.
- Where applicable, cantilevers are recommended over an external worksurface support channel. Worksurface runs over 60"W require an external worksurface support channel when a cantilever cannot be used.
- Do not use at the end of a worksurface where no 90° return panel is positioned.
- Includes tie bracket and attachment hardware.
- Avoid installation on only one side of a straight connection except to support corner worksurfaces.

- DO NOT use to support worksurfaces from which a hanging pedestal is suspended, or to which a peninsula worksurface is attached.
- DO NOT use cantilever brackets to support worksurfaces supported with permanent-wall hanger kit.
- Do not use with wall track or to support a worksurface to which a return worksurface is attached.

Cantilever Bracket — Handed (page 73)

- Cantilever brackets are handed (left or right) and can be inserted into panel reveals in 1" vertical increments. No assembly required.
- Left- and right-hand brackets required in shared applications.
- 24"D cantilevers are required to be used for both 24"D or 30"D worksurfaces.
- 18"D cantilevers are required to be used for 20"D worksurfaces or center support for 24"D.
- 12"D cantilevers are required to be used for 12"D worksurfaces.

Cantilever Bracket — Non-Handed (page 73)

- Cantilever brackets are non-handed and can be inserted into panel reveals in 1" vertical increments. Assembly required.
- One bracket in shared applications — includes two angled brackets.
- Bracket accommodates 24"D or 30"D worksurfaces.

Worksurface-to-Panel Bracket (page 73)

- Model 831324 mounts to a 24"W panel to support a 24"D worksurface.
- Model 831330 mounts to a 30"W panel to support a 24"D or 30"D worksurface.

Worksurface Bracket Kit (page 73)

- Used to connect the end of a worksurface to a panel of the same width.

Flat Brackets (page 73)

- Flat Brackets can be used to connect one worksurface perpendicularly to another worksurface.


Pedestal-to-Panel Attachment Bracket (page 73)

- Can be used in place of full end panel or return panel.
- Provides structural support to panel run by securing panel directly to pedestal.
- Is compatible with Align™ and Essentials™ pedestals.

External Worksurface Support Channel (pages 56 and 66)

- Is required on a systems worksurface for additional support for spans greater than 60"W. Width of worksurface span can be reduced by using support storage.
- Extends 1½" below the worksurface.
- When using 28"H mobile pedestals the length of support channel needs to be reduced to accommodate width of the pedestal.
- Support channel may interfere with mounting of some CPU holders and keyboard supports.

Cadence offers unlimited versatility. Its modular flexibility creates office solutions of all shapes, sizes, and styles.

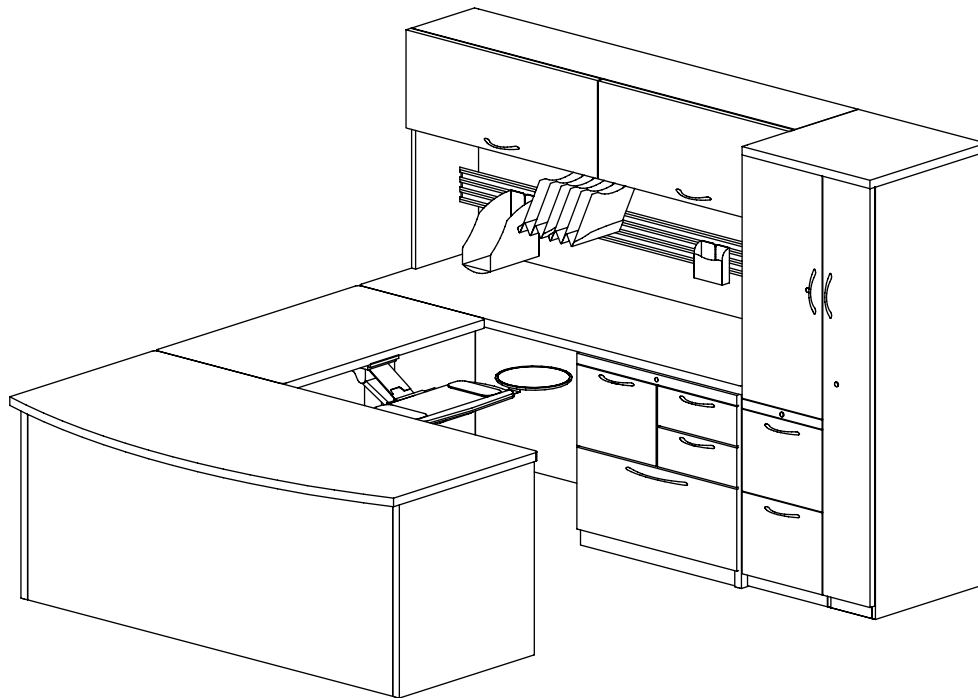

Configurations



Full Modesty



Half Modesty



Gussets

All the right choices

Choose Cadence freestanding desking with confidence. It personalizes any work environment, accommodates a range of needs, and offers all the right features — curvilinear worksurface shapes, multiple worksurface edges, and a complete paint finish and laminate offering. Cadence is made to last with heavy-gauge steel construction. Metal-to-metal worksurface connection points make installation and reconfiguration reliable and easy. And Cadence is backed by a lifetime warranty.

Universally flexible

Cadence sets up easily and reconfigures time after time. It even shares components with Optimize™, Terrace®, and Concensys, which simplifies inventory management. Cadence is created with worksurfaces, supports, modesty panels, end panels, and brackets. Cadence is compatible with the entire line of Allsteel storage solutions and Extensions — work tools to provide personalized organization for every workstyle.

Systems integration — Cadence works in combination with Optimize, Terrace, or Concensys panels, extending the functionality of both product lines.

Highly adaptable — Make the most of building architecture by using an existing wall to create a semi-private workspace.

Space utilization — Multiple worksurface shapes offer unlimited design potential for using space creatively and efficiently.

Team interaction — Cadence design flexibility allows you to create personal workspace and a team collaboration area in the same office.

The Cadence Choice

It works in the open plan, the private office, or in combination with Optimize, Terrace, or Concensys panels, allowing complete office coordination. The flexible, universal design of Cadence supports virtually any workstyle and any interior aesthetic. Backed by Allsteel's Lifetime Warranty and manufactured to strict environmental standards, Cadence provides one high-value package.

Cadence® Freestanding

Concensys® — Working with Cadence

GSA Reference Page

Configurations

End Panels **E** and Support Legs **L**

Each are available in two options: freestanding or panel-mount. The only difference between the two options are the panel-mount models come with a left- or right-handed bracket to attach the support to a panel in a Cadence systems application. If the freestanding version is purchased and later needs to be converted to panel-mount, the proper handed panel-mount bracket may be purchased separately.


The 11"D end panel is used to freestand peninsulas, curvilinear shapes, and D-tops in panel applications.

Corner Desk Legs **C**

Corner desk legs have a 90-degree bend and welded construction. The strong construction, allows gussets or half-height modesty panels to be used with corner legs.

Bridge Kits **B**

Bridge kits include: two flat brackets, two modesty panel-to-end panel attachment brackets, and two tie straps. This kit is used when attaching a bridge unit between two rectangular worksurfaces.

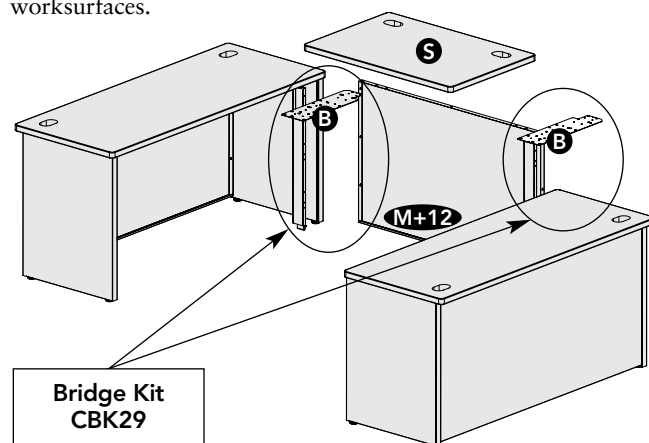


There are some bridge instances where only half of a bridge kit is needed (e.g., using a bridge between a rectangular worksurface and a corner or peninsula). A return kit may be ordered for these instances.

Surface **S**

Support Column **SC**

Return Kits **R**


Return kits include: one flat bracket, one modesty panel-to-end panel attachment bracket, and one tie strap. These are used when attaching a return to a primary desk. Return kits can also be used in some bridge applications — one example is shown below when using a peninsula.

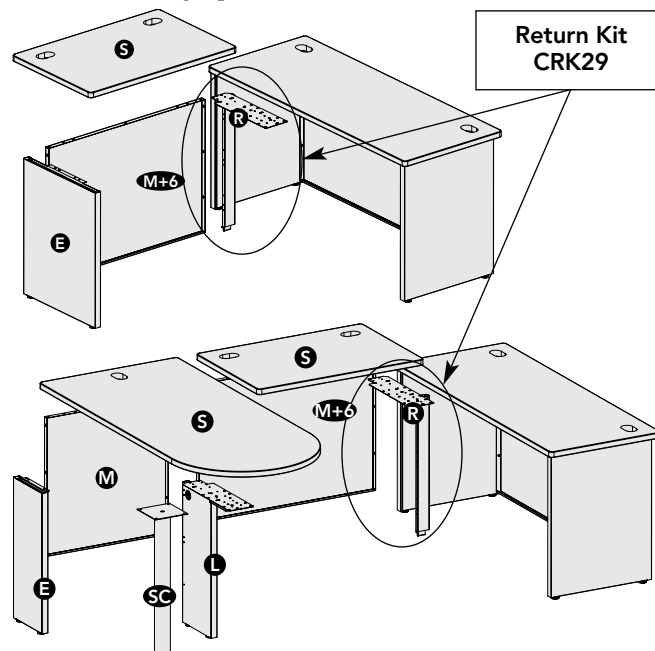

Desk-to-Panel Attachment Kits **D**


Desk-to-panel attachment kits are used to connect a worksurface and modesty panel perpendicular to a panel of corresponding width. Opposing end of worksurface must be attached with an end-panel, support leg, or corner leg mounted directly under this worksurface.

When using a corner or corner cove worksurface with the rear corner attached to a panel, and opposing end of worksurface is attached to a freestanding desk — use corner w/desk attachment kit. “Hand” of unit is determined from the user’s side of the desk (right hand unit attaches to right side of modesty).

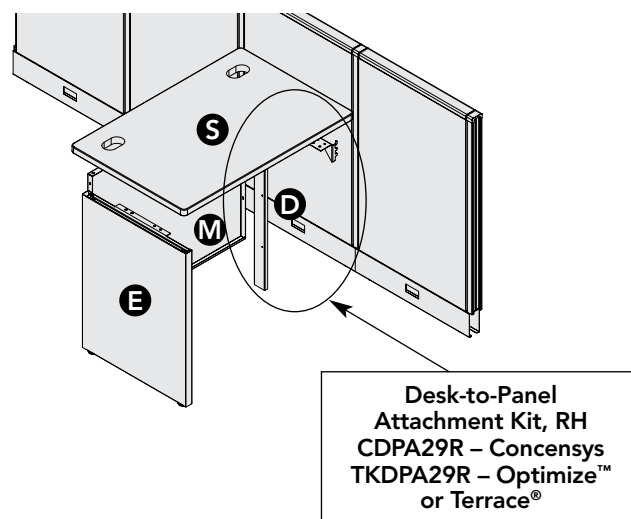

Corner w/Desk Panel Attachment Kit **CW**

Corner w/desk panel attachment kit connects the rear corner of a corner or corner cove worksurface and modesty panel to a panel when the opposing end of the worksurface shares a support leg with an adjacent freestanding desk and the support leg is mounted under the freestanding desk. "Hand" of unit is determined from the user's side of the desk (left hand unit attaches to left side of modesty).

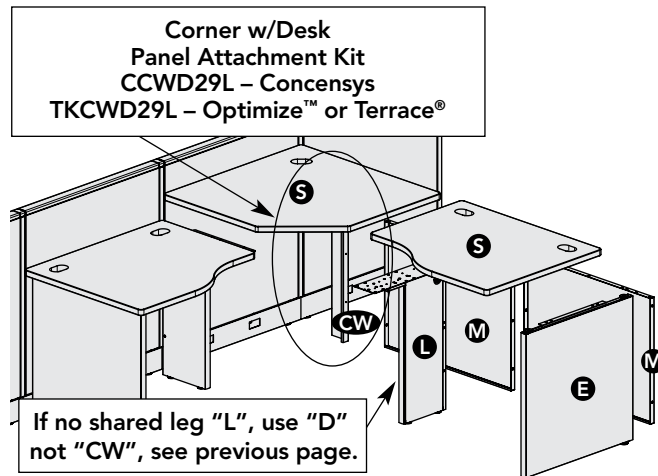


Corner Worksurfaces

Corner worksurfaces to accommodate 90-degree corner desk legs.

In-Line Connections of Desks

Freestanding full end panels must be used to support adjacent rectangular desks, corner desks, and corner desks with returns. Freestanding support legs should NOT be used at the in-line junction. 24"D full end panels may be used at the in-line junction on 30"D rectangular desks if two worksurface tie straps are used to secure the desks together. Contact Allsteel Customer Support for ordering information.

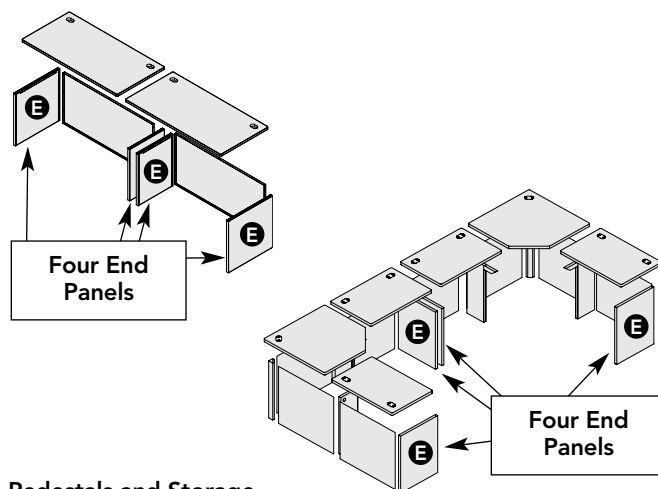

Pedestals and Storage

Pedestals must be ordered one size smaller than the depth of the worksurface. For example, 20"D peds should be used with 24"D worksurfaces. 20"D or 23"D pedestals can be used with 30"D worksurfaces. Using 18"D laterals or personal files provide additional pull style and storage options under 24"D worksurfaces.


Modesty Panels **M**

The following are some general guidelines for Cadence modesty panels:

- **Desk:** Modesty panel width is the same width as the worksurface
- **Return:** Modesty panel width is 6" greater than the width of the worksurface
- **Bridge connecting two rectangular worksurfaces:** Modesty panel width is 12" greater than the width of the bridge worksurface
- **Bridge connecting a rectangular worksurface and corner or peninsula:** Modesty panel width is 6" greater than the width of the worksurface
- **Corner connecting to an adjacent worksurface:** Modesty panel width is the same width as the worksurface.


Stand-Alone Corner Modesty Panels **SM**

Stand-alone corner modesty panels are used only when one or both sides of a corner or corner cove worksurface are freestanding and NOT attached to another worksurface. Specify the width the same as the width of the worksurface.

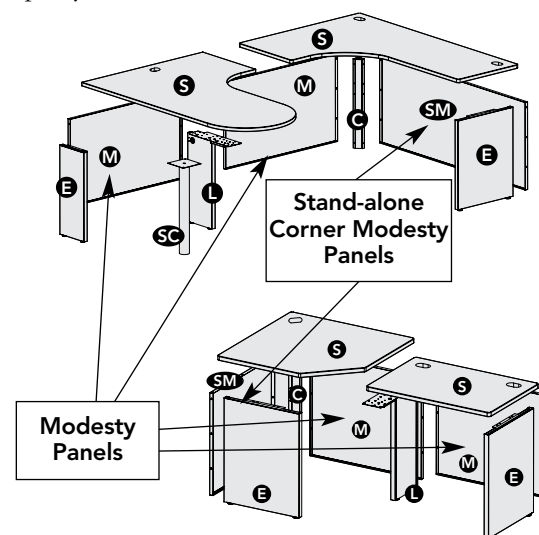

Gussets **G**


Gussets can be used in place of a modesty panel with desks 36"W to 60"W. Gussets can also be used with corner desk legs.

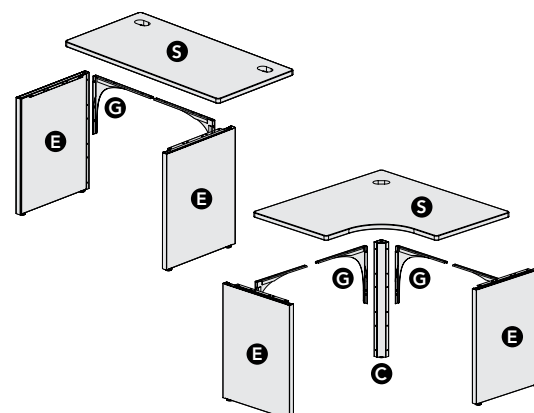

Configurations


Freestanding Desk

Example Shown		
Qty.	Model	Description
1	832436A	T-Mold Edge Worksurface 24"D x 36"W
2	CEP2429F	End-Panel Support 24"D x 29½"H
1	CS369	Modesty Panel 36"W x 29½"H

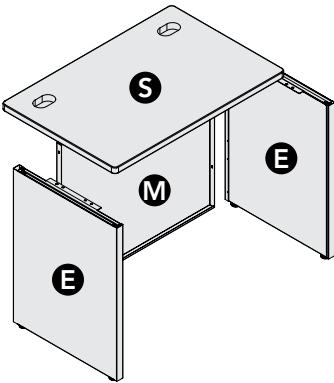


Panel-Attached Desk

Example Shown		
Qty.	Model	Description
1	832436A	T-Mold Edge Worksurface 24"D x 36"W
1	CEP2429F	End-Panel Support 24"D x 29½"H
1	CS369	Modesty Panel 36"W x 29½"H
1	□DPA29R	Desk-to-Panel Attachment Kit 29½"H – RH C – Concensys TK – Optimize™ or Terrace®

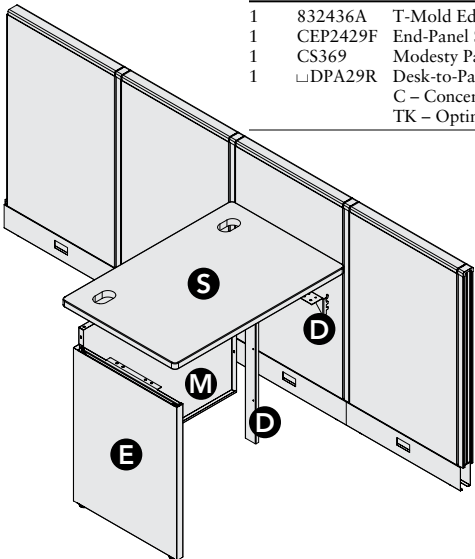

CONFIGURATION OPTIONS	Work- surface (S)	End-Panel Support (E)	Desk Support Leg (L)	Modesty Panel			Desk- to-Panel Attachment Kit (D)	Corner Desk Leg (C)
				Same width as Work- surface (M)	6" wider than Work- surface (M+6)	12" wider than Work- surface (M+12)		
Freestanding Desk	1	2		1				
Panel-Attached Desk	1	1		1			1 RH	

Return Desk (Attached to a primary or return desk.)

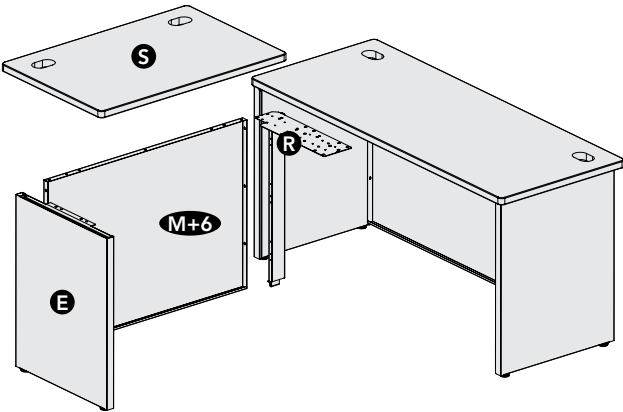


Example Shown		
Qty.	Model	Description
1	832436A	T-Mold Edge Worksurface 24"D x 36"W
1	CS429	Modesty Panel 42"W x 29½"H
1	CEP2429F	End-Panel Support 24"D x 29½"H
1	CRK29	Return Kit

Note: The widest modesty panel is 72"W which limits return worksurfaces to a maximum of 66"W.

CONFIGURATION OPTIONS	Work- surface (S)	End-Panel Support (E)	Desk Support Leg (L)	Modesty Panel			Desk- to-Panel Attachment Kit (D)	Corner Desk Leg (C)	Return Kit (R)
				Same width as Work- surface (M)	6" wider than Work- surface (M+6)	12" wider than Work- surface (M+12)			
Return Desk	1	1			1				1

Return Desk (Attached to a panel-hung worksurface.)

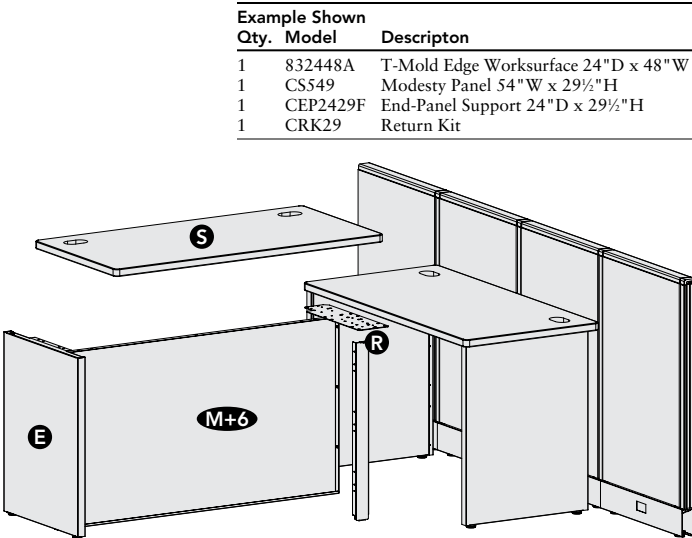


Example Shown		
Qty.	Model	Description
1	832448A	T-Mold Edge Worksurface 24"D x 48"W
1	CS549	Modesty Panel 54"W x 29½"H
1	CEP2429F	End-Panel Support 24"D x 29½"H
1	CRK29	Return Kit

Configurations

GSA Reference Page


Bridge Desk (Attached between two primary desks.)

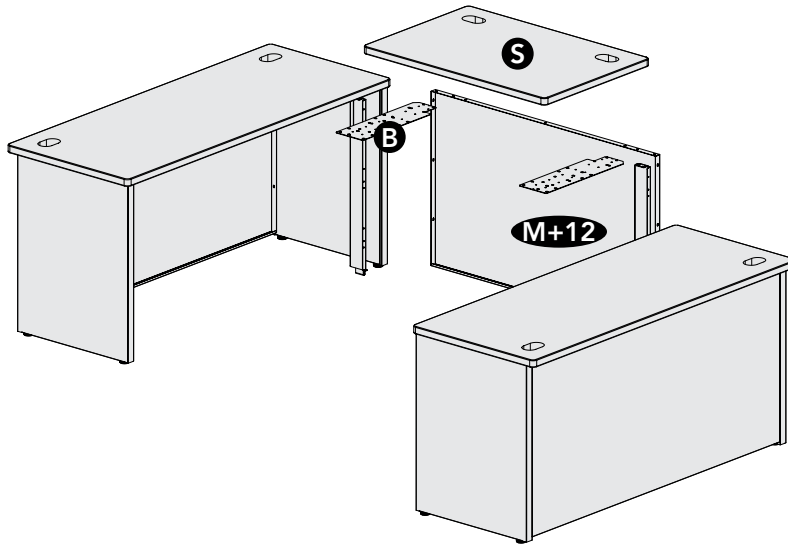

Example Shown		
Qty.	Model	Description
1	832442A	T-Mold Edge Worksurface 24"D x 42"W
1	CS549	Modesty Panel 54"W x 29½"H
1	CBK29	Bridge Kit

CONFIGURATION	Work-surface (S)	End-Panel Support (E)	Desk Support Leg (L)	Modesty Panel			Desk-to-Panel Attachment Kit (D)	Corner Desk Leg (C)	Bridge Kit (B)
				Same width as Work-surface (M)	6" wider than Work-surface (M+6)	12" wider than Work-surface (M+12)			
Bridge Desk	1					1			1

Bridge Desk and Peninsula (Attached to a primary desk).

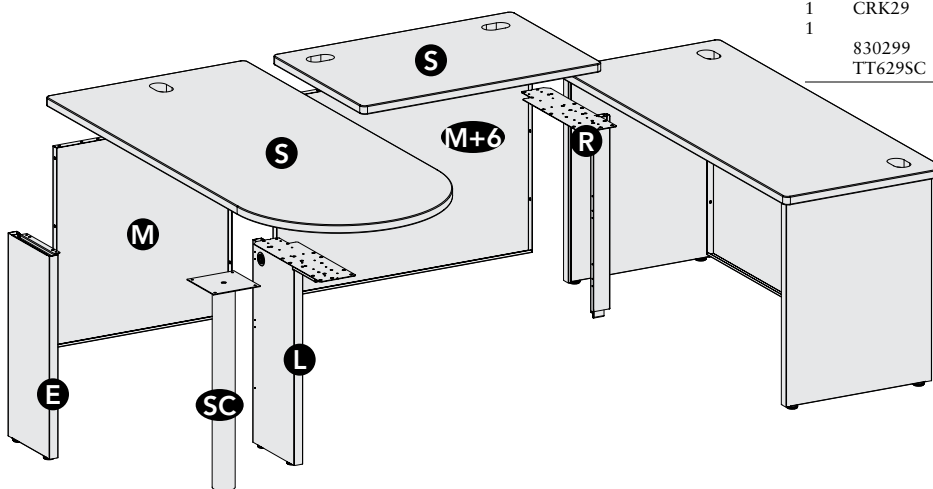


Example Shown		
Qty.	Model	Description
1	832442A	T-Mold Edge Worksurface 24"D x 42"W
1	833160A	T-Mold Edge Peninsula Worksurface 30"W x 60"L
1	CS489	Modesty Panel 48"W x 29½"H
1	CS309	Modesty Panel 30"W x 29½"H
1	CEP1129F	End-Panel Support 11"D x 29½"H
1	CSL2429F	Support Leg 24"D x 29½"H
1	CRK29	Return Kit
1	830299	Support Column for Peninsula Worksurface 29½"H (Concensys)
1	TT629SC	(Optimize™ or Terrace®)

CONFIGURATION OPTION	Work-surface (S)	End-Panel Support (E)	Desk Support Leg (L)	Modesty Panel			Desk-to-Panel Attachment Kit (D)	Support Column (SC)	Return Kit (R)
				Same width as Work-surface (M)	6" wider than Work-surface (M+6)	12" wider than Work-surface (M+12)			
Bridge Desk and Peninsula	2	1	1	1	1			1	1

Cadence® Freestanding


Configurations

Corner Desk (Stand-alone)

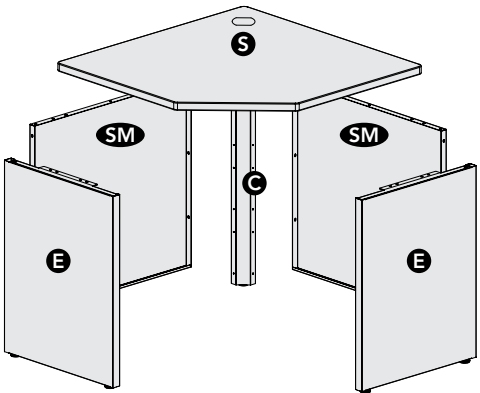

Example Shown		
Qty.	Model	Description
1	833624A	T-Mold Edge Worksurface 24"D x 36"W
2	CSCMP3629	Stand-Alone Corner Modesty Panel 36"W x 29½"H
2	CEP2429F	End-Panel Support 24"D x 29½"H
1	CDL29	Corner Desk Leg 29½"H


Corner Desk (With an adjacent desk attached at one side.)

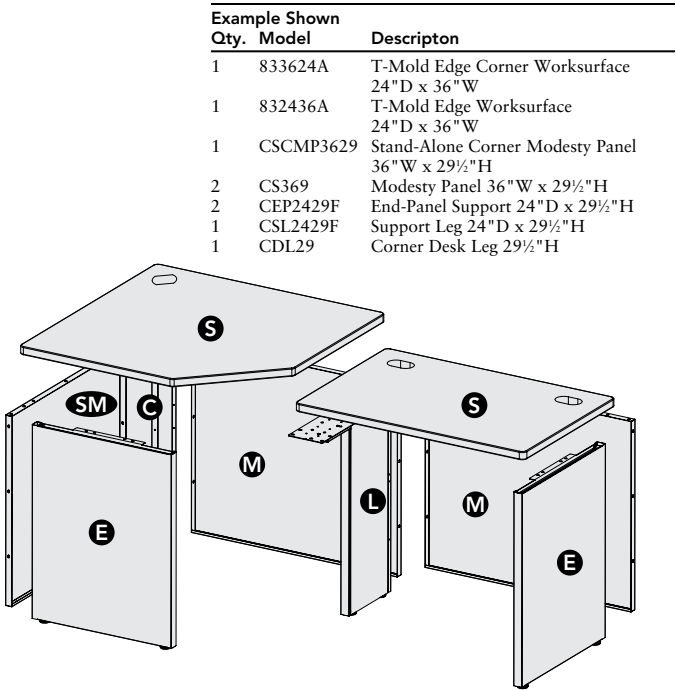

Example Shown		
Qty.	Model	Description
1	833624A	T-Mold Edge Corner Worksurface 24"D x 36"W
1	832436A	T-Mold Edge Worksurface 24"D x 36"W
1	CSCMP3629	Stand-Alone Corner Modesty Panel 36"W x 29½"H
2	CS369	Modesty Panel 36"W x 29½"H
2	CEP2429F	End-Panel Support 24"D x 29½"H
1	CSL2429F	Support Leg 24"D x 29½"H
1	CDL29	Corner Desk Leg 29½"H

CONFIGURATION OPTION	Work-surface (S)	End-Panel Support (E)	Desk Support Leg (L)	Modesty Panel		Stand-Alone Corner Modesty Panel	Desk-to-Panel Attachment Kit (D)	Corner Desk Leg (C)
				Same width as Work-surface (M)	6" wider than Work-surface (M+6)			
Corner Desk	1	2				2		1
Corner Desk (with adjacent desk)	2	2	1	2		1		1

Bridge Desk (Attached between corner and primary desk.)

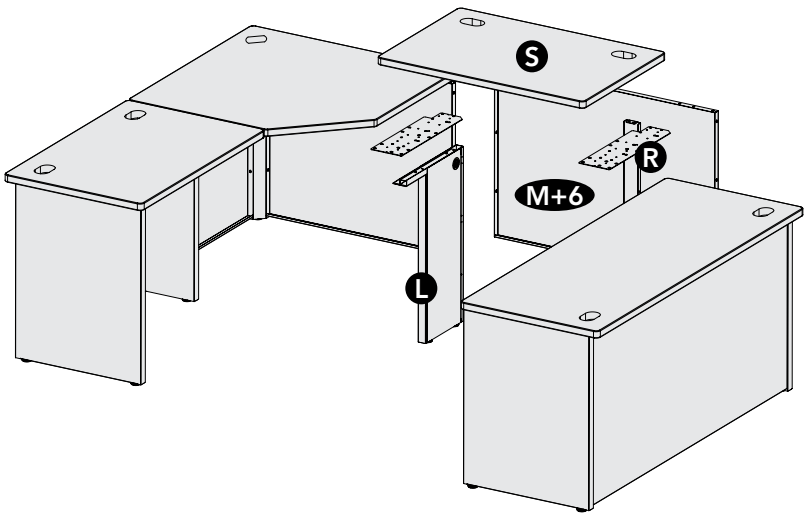


Example Shown		
Qty.	Model	Description
1	832436A	T-Mold Edge Worksurface 24"D x 36"W
1	CS429	Modesty Panel 42"W x 29½"H
1	CRK29	Return Kit
1	CSL2429F	Support Leg 24"D x 29½"H

CONFIGURATION	Work-surface (S)	End-Panel Support (E)	Desk Support Leg (L)	Modesty Panel			Desk-to-Panel Attachment Kit (D)	Corner Desk Leg (C)	Return Kit (R)
				Same width as Work-surface (M)	6" wider than Work-surface (M+6)	12" wider than Work-surface (M+12)			
Bridge Desk	1		1		1				1

Configurations

GSA Reference Page


Corner Desk (Attached to a panel with an adjacent desk at one side.)

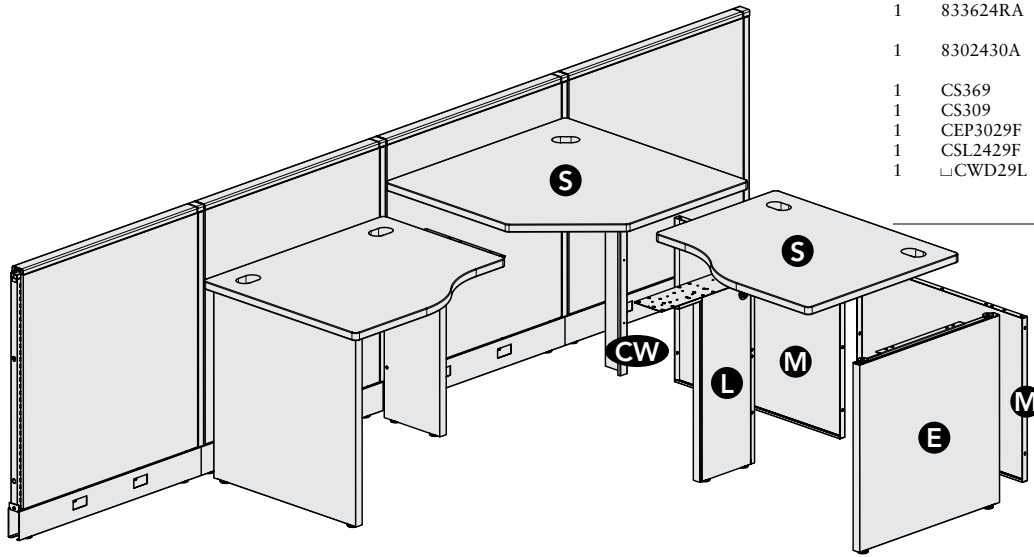

Example Shown		
Qty.	Model	Description
1	833624RA	T-Mold Edge Corner Worksurface 36"W x 24"D
1	8302430A	T-Mold Edge Wave Worksurface 30"W x 24"D/30"D
1	CS369	Modesty Panel 36"W x 29½"H
1	CS309	Modesty Panel 30"W x 29½"H
1	CEP3029F	End-Panel Support 30"D x 29½"H
1	CSL2429F	Support Leg 24"D x 29½"H
1	□CWD29L	Corner w/Desk Attachment Kit 29"H LH
C – Concensys		
TK – Optimize™ or Terrace®		

CONFIGURATION	Work-surface (S)	End-Panel Support (E)	Desk Support Leg (L)	Modesty Panel			Desk-to-Panel Attachment Kit (D)	Corner Desk Leg (C)	Corner w/Desk Panel Attachment Kit (CW)
				Same width as Work-surface (M)	6" wider than Work-surface (M+6)	12" wider than Work-surface (M+12)			
Corner Desk	2	1	1	2					1 LH

"U" with Jetty and Corner Cove

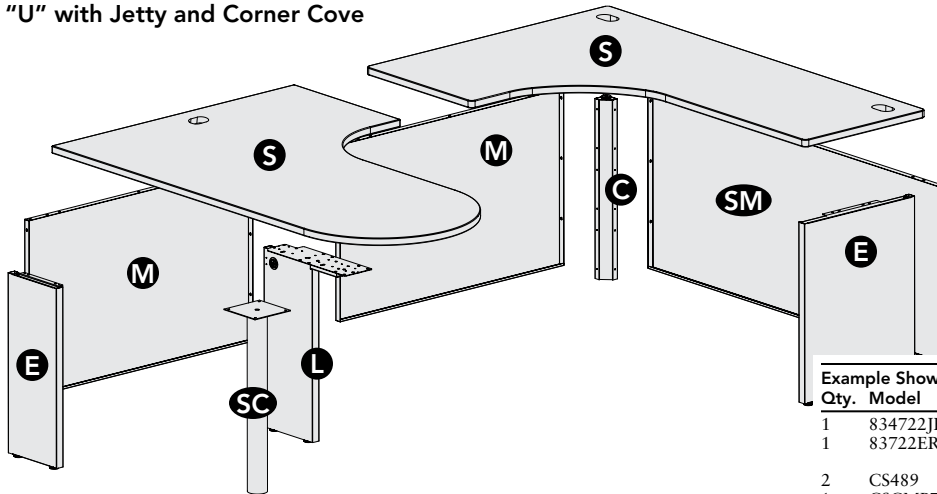

Example Shown		
Qty.	Model	Description
1	834722JRM	Flat Edge Jetty RH 48"D x 72"W x 24" x 30"
1	83722ERM	Flat Edge Corner Cove RH 48"D x 72"W x 24"
2	CS489	Modesty Panel 48"W x 29½"H
1	CSCMP7229	Stand-Alone Corner Modesty Panel 72"W x 29½"H
1	CEP1129F	End-Panel Support 11"D x 29½"H
1	CSL2429F	Support Leg 24"D x 29½"H
1	CEP2429F	Full End-Panel Support 24"D x 29½"H
1	CDL29	Corner Desk Leg 29½"H
1		Support Column for Jetty 29½"H (Concensys)
	830299	(Optimize or Terrace)
	TT629SC	

CONFIGURATION OPTION	Work-surface (S)	End-Panel Support (E)	Desk Support Leg (L)	Modesty Panel		Stand-Alone Corner Modesty Panel Same width as Work-surface (SM)	Support Column (SC)	Corner Desk Leg (C)
				Same width as Work-surface (M)	6" wider than Work-surface (M+6)			
Cove and Jetty	2	2	1	2		1	1	1

Cadence® Freestanding

Concensys® — Specification Information

GSA Reference Page

Cadence Supports

End-Panel Support (page 74)

- End panels are non-handed.
- Freestanding end panel is the same as the Concensys panel-mount end panel except removable panel-mount bracketry not included.
- End panels include attaching hardware and leveling glides.
- Leveling glides provide 2¼" of adjustment.
- End panels are universal, shipped with a left and right-hand attachment bracket.
- End panels cannot be used for in-line junctions and are only used at the end of a panel run.

Support Leg (page 74)

- Support legs are non-handed.
- Freestanding support leg is the same as the Concensys panel-mount support leg except removable panel-mount bracketry not included. Leg portion is 12¾"D.
- Supports junctions of two worksurfaces.
- Includes a flat bracket.
- Concensys in-line support legs are used to support 24"D worksurfaces only in a shared position.

Panel-mount Bracketry (page 74)

- Includes hardware to convert freestanding end panels and support legs to panel-mount.
- Non-handed.

Support Column (page 74)

- Used to support one end of curvilinear worksurfaces.
- Includes panel support brackets.

Permanent-Wall Hanger Kit (page 74)

- Mounts to permanent dry-wall to hang panel-hung components.
- Wall track has ⅝" x ½" slots on 1" centers.
- Customer to furnish connecting hardware. (Refer to Concensys Installation Instructions for appropriate hardware.)
- Worksurfaces should not be supported with cantilever brackets when using permanent-wall hanger kit.
- An integral channel is provided for vertically routing task light cords.
- Includes a cover for top of channel.

Corner Desk Leg (page 74)

- Attaches two modesty panels at rear of corner desk.
- Leveler provides 1½" vertical adjustment.

Bridge Kit (page 74)

- Connects bridge worksurface and modesty panel to end panels and worksurfaces that are perpendicular to the bridge worksurface.
- Includes two flat brackets and two modesty panel-to-end-panel brackets.

Return Kit (page 74)

- Connects return worksurface and modesty panel to end panel and perpendicular worksurface — non-handed.
- Includes one flat bracket and one modesty panel-to-end-panel bracket.

Desk-To-Panel Attachment Kit (page 74)

- Used to connect a worksurface and modesty panel perpendicularly to a Concensys panel of corresponding width. Opposing end of worksurface must be attached with an end-panel, support leg or corner leg mounted directly under this worksurface.
- If using corner or corner cove with the rear corner attached to a panel, and opposing end of worksurface is attached to a freestanding desk — use corner w/desk panel attachment kit
- “Hand” of unit is determined from the user’s side of the desk (left hand unit attaches to left side of modesty).

Corner w/Desk Panel Attachment Kit (page 74)

- Used when the rear corner of a corner or corner cove worksurface and modesty panel is attached to a Concensys panel and opposing end of worksurface is attached to a freestanding desk. Opposing end of worksurface shares the support leg that is mounted under the adjacent freestanding desk.
- “Hand” of unit is determined from the user’s side of the desk.

Flat Brackets (page 74)

- Flat brackets can be used to connect one worksurface perpendicularly to another worksurface.

(continued on next page)

Cadence Supports and Modesty Panels *(continued)***Modesty Panel** (page 75)

- Mounts to end-panel supports, desk support legs, bridge kit, return kit, desk-to-panel and corner w/desk panel attachment kits.
- 29½"H units provide ¾" of space between bottom of modesty panel and floor.
- Actual width of 29½"H modesty panel is 3¼" less than the nominal dimension listed in the Systems Price List.
- 14"H units provide 14¼" of space between bottom of modesty panel and floor.
- Use 14"H modesty panels for desks positioned against a wall to provide access to electrical receptacles.
- 14"H modesty panels, stand-alone corner modesty panels or gussets can now be used with corner or corner cove worksurfaces.
- Refer to pages 47-53 to select proper width.

Stand-alone Corner Modesty Panel (page 75)

- Use only when freestanding one or both sides of a corner or corner cove worksurface.
- Specify width the same as width of worksurface.
- See examples on page 52 on how to specify.
- 29½"H units provide ¾" of spacing between bottom of panel and floor.
- 14"H units provide 14¼" of space between bottom of modesty panel and floor.
- Actual width of modesty panel is 6⅞" less than the nominal dimension listed below.
- Modesty panels are inset 2⅞"; when adding pedestals, consult the chart below.

Gussets (page 75)

- Can be used in place of a modesty panel with desks 36"W to 60"W.
- Provides easy access to wall outlets.
- Can be used with corner desks.
- Cannot be used with suspended pedestals.
- Modesty panels are inset 2⅞"; when adding pedestals, consult the chart below.
- Gussets can be used on corner and corner cove worksurfaces.

Universal Modesty Panel (page 76)

- Mounts under peninsula, p-shape, jetty, and boomerang worksurfaces.
- Can be used with panel-mounted and freestanding worksurfaces.
- Provides 8½" of privacy and is non-handed.
- Constructed of steel. No upcharge for Select paint.
- Only requires attachment to the worksurface.
- Does not provide electrical, data or structural support.
- Panel is 1½" thick and can be mounted at various distances from edge of worksurface based on user's preference for clearance and conferencing requirements.

Universal Modesty Panels for Concensys Worksurfaces

	Peninsula			P-Shape	Jetty		Boomerang
Model	60"L	66"L	72"L	72"L	66"L	72"L	72"L
PMP41	•						
PMP47		•		•	•		
PMP53			•			•	•

Metal Center Drawers (page 76)

- All metal center drawers feature pencil trays with three compartments for storage.
- For locking specifications, see pages 122-124.
- Ball-bearing slide suspension.

Pedestal Compatibility with Cadence Desking and Systems Worksurfaces


Pedestal Depth	Cadence Freestanding		Systems Panel-hung Worksurfaces	
	24" Deep	30" Deep	24" Deep	30" Deep
18"	Yes	Yes	Yes	Yes
19⅞"	Yes*	Yes	Yes*	Yes
23⅞"		Yes	Yes*	Yes
29⅞"				Yes*

*Wire management grommet is blocked in these applications.

Note: Pedestal placement may affect access to receptacles in base pathway.

For specification information see pages 38-46.

GSA SIN 711-1

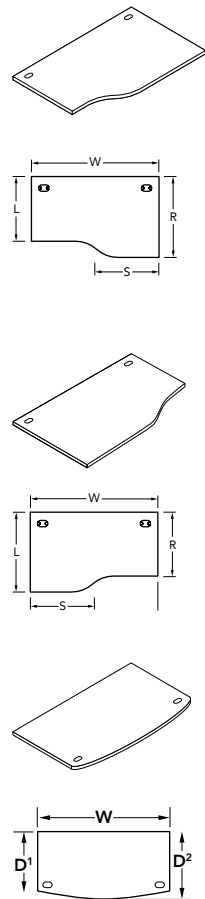

Description	S	Model	List Price		
			L1	L2	L3
Wave Worksurfaces					
30"W x 24"L x 30"R	11½"	8302430M	\$ 365	\$ 384	\$ 402
36"W x 24"L x 30"R	13½"	8362430M	\$ 388	\$ 410	\$ 427
42"W x 24"L x 30"R	15½"	8422430M	\$ 418	\$ 441	\$ 460
48"W x 24"L x 30"R	15½"	8482430M	\$ 445	\$ 470	\$ 489
54"W x 24"L x 30"R	21½"	8542430M	\$ 493	\$ 520	\$ 541
60"W x 24"L x 30"R	27½"	8602430M	\$ 549	\$ 578	\$ 603
66"W x 24"L x 30"R	33½"	8662430M	\$ 593	\$ 624	\$ 652
72"W x 24"L x 30"R	39½"	8722430M	\$ 642	\$ 675	\$ 705
30"W x 30"L x 24"R	11½"	8303024M	\$ 365	\$ 384	\$ 402
36"W x 30"L x 24"R	13½"	8363024M	\$ 388	\$ 410	\$ 427
42"W x 30"L x 24"R	15½"	8423024M	\$ 418	\$ 441	\$ 460
48"W x 30"L x 24"R	15½"	8483024M	\$ 445	\$ 470	\$ 489
54"W x 30"L x 24"R	21½"	8543024M	\$ 493	\$ 520	\$ 541
60"W x 30"L x 24"R	27½"	8603024M	\$ 549	\$ 578	\$ 603
66"W x 30"L x 24"R	33½"	8663024M	\$ 593	\$ 624	\$ 652
72"W x 30"L x 24"R	39½"	8723024M	\$ 642	\$ 675	\$ 705
Bow-Front Worksurfaces					
60"W x 30"D¹ x 36"D²		833660BTM	\$ 720	\$ 757	\$ 791
66"W x 30"D¹ x 36"D²		833666BTM	\$ 780	\$ 819	\$ 856
72"W x 30"D¹ x 36"D²		833672BTM	\$ 839	\$ 881	\$ 922

Note: Add Suffix "N" to model number for no grommet, no upcharge.

E All Concensys models are available in the **Everyday Advantage®** program, see page 10 for details.

How to specify — Select the Concensys Model Number from above.	1st Option: Laminate: See inside front cover for finishes.	2nd Option: Edge Trim Color: See inside front cover for finishes.	3rd Option: Grommet Type (if applicable): P Plastic M Metal (add \$11 per grommet)	4th Option: Grommet Color (Metal only): EL Matte Silver Note: Plastic grommet color matches trim selection.
8 .	.	.		E L


Example: 8302430M.LT3B.EV.P

Worksurfaces

Concensys® — Corner and Corner Shelf — Flat Edge

For specification information see pages 38-46.

GSA SIN 711-1




Description	Model	List Price		
		L1	L2	L3
Corner Worksurfaces with Straight Leading Edge				
36"W x 24"D	833624M	\$ 481	\$ 518	\$ 552
42"W x 24"D	834224M	\$ 504	\$ 531	\$ 553
48"W x 24"D	834824M	\$ 564	\$ 594	\$ 619
42"W x 30"D	834230M	\$ 622	\$ 654	\$ 684
48"W x 30"D	834830M	\$ 630	\$ 663	\$ 692



Corner Worksurfaces with Radial Leading Edge				
36"W x 24"D	833624RM	\$ 499	\$ 526	\$ 548
42"W x 24"D	834224RM	\$ 531	\$ 559	\$ 584
48"W x 24"D	834824RM	\$ 604	\$ 636	\$ 664
42"W x 30"D	834230RM	\$ 641	\$ 674	\$ 704
48"W x 30"D	834830RM	\$ 691	\$ 726	\$ 759

Note: Add Suffix "N" to model number for no grommet, no upcharge.



Description	Model	Core P1 List Price			Select P2 List Price		
		L1	L2	L3	L1	L2	L3
Corner Shelves with Flat Edge							
36" x 36" x 11"D	860536M	\$ 414	\$ 437	\$ 455	\$ 414	\$ 437	\$ 455
42" x 42" x 11"D	860542M	\$ 437	\$ 461	\$ 480	\$ 437	\$ 461	\$ 480
48" x 48" x 11"D	860548M	\$ 466	\$ 491	\$ 512	\$ 466	\$ 491	\$ 512


E All Concensys models are available in the **Everyday Advantage®** program, see page 10 for details.

How to specify — Select the Concensys Model Number from above.	1st Option: Laminate: See inside front cover for finishes.	2nd Option: Paint (Corner Shelves only): <div>C S</div> See inside front cover for finishes.	2nd Option: Edge Trim Color: See inside front cover for finishes.	3rd Option: Grommet Type (Corner Worksurfaces only): <div>P Plastic</div> <div>M Metal (add \$11 per grommet)</div>	4th Option: Grommet Color (Metal only): <div>EL Matte Silver</div> Note: Plastic grommet color matches trim selection.
<div>8</div>	<div></div>	<div>P</div>	<div></div>	<div></div>	<div>E L</div>


Examples: 834230M.LT3B.EV.MEL 860536M.LT3B.P27.E4

For specification information see pages 38-46.

GSA SIN 711-1




Description	Model	List Price		
		L1	L2	L3
Corner Cove Worksurfaces — Extended Left				
60" x 36" — 24"L / 24"R	83122ELM	\$ 570	\$ 600	\$ 627
60" x 36" — 24"L / 30"R	83132ELM	\$ 592	\$ 623	\$ 651
60" x 48" — 24"L / 24"R	83622ELM	\$ 630	\$ 663	\$ 692
60" x 48" — 30"L / 24"R	83623ELM	\$ 657	\$ 691	\$ 722
60" x 48" — 24"L / 30"R	83632ELM	\$ 657	\$ 691	\$ 722
60" x 48" — 30"L / 30"R	83633ELM	\$ 681	\$ 716	\$ 748
72" x 36" — 24"L / 24"R	83222ELM	\$ 630	\$ 663	\$ 692
72" x 36" — 24"L / 30"R	83232ELM	\$ 657	\$ 691	\$ 722
72" x 48" — 24"L / 24"R	83722ELM	\$ 803	\$ 843	\$ 881
72" x 48" — 30"L / 24"R	83723ELM	\$ 830	\$ 871	\$ 913
72" x 48" — 24"L / 30"R	83732ELM	\$ 830	\$ 871	\$ 913
72" x 48" — 30"L / 30"R	83733ELM	\$ 855	\$ 898	\$ 940



Corner Cove Worksurfaces — Extended Right				
36" x 60" — 24"L / 24"R	83122ERM	\$ 570	\$ 600	\$ 627
36" x 60" — 30"L / 24"R	83132ERM	\$ 592	\$ 623	\$ 651
48" x 60" — 24"L / 24"R	83622ERM	\$ 630	\$ 663	\$ 692
48" x 60" — 24"L / 30"R	83623ERM	\$ 657	\$ 691	\$ 722
48" x 60" — 30"L / 24"R	83632ERM	\$ 657	\$ 691	\$ 722
48" x 60" — 30"L / 30"R	83633ERM	\$ 681	\$ 716	\$ 748
36" x 72" — 24"L / 24"R	83222ERM	\$ 630	\$ 663	\$ 692
36" x 72" — 30"L / 24"R	83232ERM	\$ 657	\$ 691	\$ 722
48" x 72" — 24"L / 24"R	83722ERM	\$ 803	\$ 843	\$ 881
48" x 72" — 24"L / 30"R	83723ERM	\$ 830	\$ 871	\$ 913
48" x 72" — 30"L / 24"R	83732ERM	\$ 830	\$ 871	\$ 913
48" x 72" — 30"L / 30"R	83733ERM	\$ 855	\$ 898	\$ 940

Note: Add Suffix "N" to model number for no grommet, no upcharge.

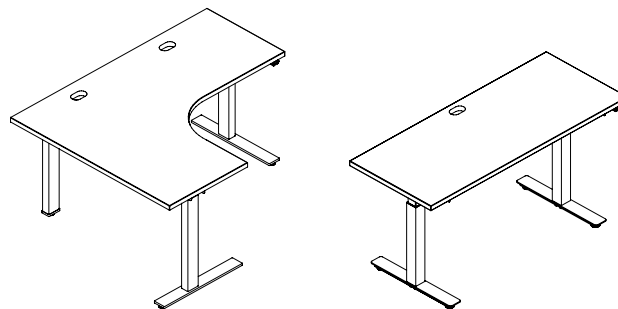

Note: Freestanding Altitude 2- and 3-stage electric height-adjustable tables are available to order in the Seating, Collaboration and Tables price list.

E All Concensys models are available in the **Everyday Advantage®** program, see page 10 for details.

How to specify — Select the Concensys Model Number from above.	1st Option: Laminate: See inside front cover for finishes.	2nd Option: Edge Trim Color: See inside front cover for finishes.	3rd Option: Grommet Type: P Plastic M Metal (add \$11 per grommet)	4th Option: Grommet Color (Metal only): EL Matte Silver Note: Plastic grommet color matches trim selection.
8 3 .	.	.		E L

Example: 83722ERM.LT3B.EY.MEL

Concensys® — Reef / Quarter-Round / D-Shaped — Flat Edge

GSA SIN 711-1

Description	Model	List Price		
		L1	L2	L3
24"D Reef Worksurfaces — Left-Hand (extends to 36"D)				
66"W	836624LM	\$ 662	\$ 696	\$ 727
72"W	837224LM	\$ 676	\$ 711	\$ 742
30"D Reef Worksurfaces — Left-Hand (extends to 42"D)				
66"W	836630LM	\$ 676	\$ 711	\$ 742
72"W	837230LM	\$ 697	\$ 732	\$ 765

66"W	836624RM	\$ 662	\$ 696	\$ 727
72"W	837224RM	\$ 676	\$ 711	\$ 742

66"W	836630RM	\$ 676	\$ 711	\$ 742
72"W	837230RM	\$ 697	\$ 732	\$ 765

NOTE: Add Suffix “N” to model number for no grommet, no upcharge.

24"W x 24"W	802424M	\$ 339	\$ 356	\$ 374
30"W x 30"W	803030M	\$ 427	\$ 451	\$ 469

Worksurface connects to two 24"D Worksurfaces	832407M	\$ 650	\$ 683	\$ 714
Worksurface connects to two 30"D Worksurfaces	833007M	\$ 757	\$ 795	\$ 831

832407M

833007M

Note: Cantilever brackets should not be used in place of end panels in this application.

<p>How to specify — Select the Concensys Model Number from above.</p>	<p>1st Option: Laminate: See inside front cover for finishes.</p>	<p>2nd Option: Edge Trim Color: See inside front cover for finishes.</p>	<p>3rd Option: Grommet Type: P Plastic M Metal (add \$11 per grommet)</p>	<p>4th Option: Grommet Color (Metal only): EL Matte Silver Note: Plastic grommet color matches trim selection.</p>
<p>8 3 . </p>	<p> . </p>	<p> . </p>	<p> </p>	<p>E L </p>

Examples: 836630RM.LT3B.EV.MEL 802424M.LT3B.EV

Worksurfaces

9120 Program

Laminate Worksurfaces / Non-Standard Sizes

ORDERING


The 9120 Program can be used to order particle board rectangular worksurfaces in any non-standard width and depth in $\frac{1}{8}$ " increments up to a maximum of 120" W x 36" D.

Specify:

- Model Number**
Specify closest nominal width/depth model (round up).
- Grommet Option** (if desired)
See grommet specification instructions on this page.
- Grommet Type:**
P Plastic
M Metal (add \$11 per grommet for laminate)
- Grommet Color:**
(Metal only)
EL Matte Silver
NOTE: Plastic grommet will match flat edge.
- Laminate Choices**
See inside front cover.
- Flat Edge Color Choices**
See EDGE COLORS inside front cover for laminates.
- Exact Size**
Specify the **EXACT Width** and **EXACT Depth** you require.
Width and depth is specified in $\frac{1}{8}$ " increments which is denoted as a single digit following the whole number dimension at the end of the model number string.

$\frac{1}{8}$ " = 1	$\frac{5}{8}$ " = 5
$\frac{2}{8}$ " = 2	$\frac{6}{8}$ " = 6
$\frac{3}{8}$ " = 3	$\frac{7}{8}$ " = 7
$\frac{4}{8}$ " = 4	no extra increment = 0

For example, when ordering a worksurface that is 34 $\frac{3}{8}$ " W x 20 $\frac{1}{2}$ " D, specification should be 345Wx204D.
Example: 9120R3624.G0.TM33.EU.345Wx204D.



PRODUCT SPECIFICATIONS

- Flat Edge on all sides
- 45 lb. particle board
- 1 $\frac{1}{4}$ " top thickness
- .020 resin impregnated paper backer sheet
- Grommets available
- Maximum width 120" (maximum recommended unsupported span is 42")
- Maximum depth 36"
- Standard Allsteel laminates
- Quantities of 10 or greater are palletized; less than 10 are individually cartoned.

Note: 9120 worksurface maximum unsupported span is 42". 9120 worksurfaces do not have pre-drilled pilot holes or threaded metal inserts.


When spanning multiple freestanding storage units with one worksurface, add $\frac{1}{8}$ " for each additional storage unit. For example, when ordering a worksurface for three 30"W lateral files. 3 units x 30" = 90" + $\frac{1}{8}$ " + $\frac{1}{8}$ " = 90 $\frac{1}{4}$ " worksurface. Do NOT follow this rule if panel wrapping storage units.

CHANGES / CANCELLATIONS

No changes/cancellations for 9120 Program Worksurfaces.

GROMMET SPECIFICATIONS

Plastic grommets are made of durable ABS plastic and grommets match edge color on laminate worksurfaces. Metal grommets are only available Matte Silver oval for laminate.



PRICING

One Grommet – GC, GL, or GR Position \$17.00
Two Grommets – G3 or G4 Position..... \$34.00
NOTE: Add \$11 per grommet for Metal grommets with laminate.

ORDERING


Specify grommet location and color.

Example: 9120R10836.GCP.TM33.EU.1022Wx326D

Code Grommet Position

- GC Centered side-to-side – 3 $\frac{1}{8}$ " from rear to grommet edge; 4 $\frac{1}{2}$ " from rear to grommet center
- GL 3" from left side – 3 $\frac{1}{8}$ " from rear to grommet edge; 4 $\frac{1}{2}$ " from rear to grommet center
- GR 3" from right side – 3 $\frac{1}{8}$ " from rear to grommet edge; 4 $\frac{1}{2}$ " from rear to grommet center
- G3 Pair of grommets each 18" from side edge – 3 $\frac{1}{8}$ " from rear to grommet edge; 4 $\frac{1}{2}$ " from rear to grommet center (Position G3 not available on tops 60"W or less.)
- G4 Pair of grommets each 3 $\frac{3}{8}$ " from side edge – 3 $\frac{1}{8}$ " from rear to grommet edge; 4 $\frac{1}{2}$ " from rear to grommet center
- G0 No grommets

Dimensions are from grommet center line to top edge.

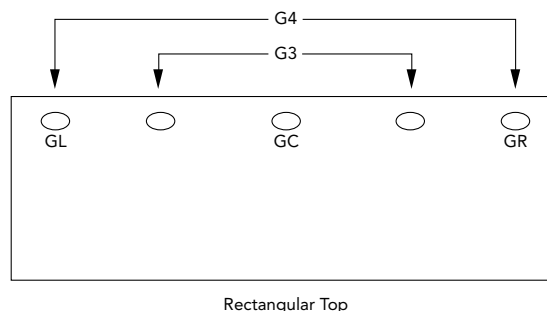

Rectangular Top

Grommet positions other than those shown above are considered non-standard.

Worksurfaces

9120 Program

For specification information see page 64.

Laminate Worksurfaces / Non-Standard Sizes

GSA SIN 711-1


Maximum	Model Number*	Width		Depth		Laminate List Price		
		MIN	MAX	MIN	MAX	L1	L2	L3
18"D								
18"W	9120R1818	180W	180W	121D	180D	\$ 288	\$ 303	\$ 318
24"W	9120R2418	181W	240W	121D	180D	\$ 300	\$ 315	\$ 331
30"W	9120R3018	241W	300W	121D	180D	\$ 312	\$ 328	\$ 344
36"W	9120R3618	301W	360W	121D	180D	\$ 341	\$ 358	\$ 376
42"W	9120R4218	361W	420W	121D	180D	\$ 376	\$ 395	\$ 414
48"W	9120R4818	421W	480W	121D	180D	\$ 434	\$ 458	\$ 477
60"W	9120R6018	481W	600W	121D	180D	\$ 539	\$ 568	\$ 592
72"W	9120R7218	601W	720W	121D	180D	\$ 650	\$ 683	\$ 714
84"W	9120R8418	721W	840W	121D	180D	\$ 851	\$ 893	\$ 936
96"W	9120R9618	841W	960W	121D	180D	\$ 880	\$ 924	\$ 967
108"W	9120R10818	961W	1080W	121D	180D	\$ 1006	\$ 1055	\$ 1105
120"W	9120R12018	1081W	1200W	121D	180D	\$ 1146	\$ 1203	\$ 1258
24"D								
24"W	9120R2424	181W	240W	181D	240D	\$ 326	\$ 342	\$ 360
30"W	9120R3024	241W	300W	181D	240D	\$ 339	\$ 356	\$ 374
36"W	9120R3624	301W	360W	181D	240D	\$ 371	\$ 390	\$ 408
42"W	9120R4224	361W	420W	181D	240D	\$ 404	\$ 427	\$ 444
48"W	9120R4824	421W	480W	181D	240D	\$ 460	\$ 485	\$ 505
60"W	9120R6024	481W	600W	181D	240D	\$ 566	\$ 596	\$ 623
72"W	9120R7224	601W	720W	181D	240D	\$ 676	\$ 711	\$ 742
84"W	9120R8424	721W	840W	181D	240D	\$ 880	\$ 924	\$ 967
96"W	9120R9624	841W	960W	181D	240D	\$ 909	\$ 954	\$ 999
108"W	9120R10824	961W	1080W	181D	240D	\$ 1035	\$ 1086	\$ 1137
120"W	9120R12024	1081W	1200W	181D	240D	\$ 1173	\$ 1231	\$ 1289
30"D								
30"W	9120R3030	241W	300W	241D	300D	\$ 391	\$ 413	\$ 430
36"W	9120R3630	301W	360W	241D	300D	\$ 412	\$ 435	\$ 453
42"W	9120R4230	361W	420W	241D	300D	\$ 438	\$ 462	\$ 481
48"W	9120R4830	421W	480W	241D	300D	\$ 474	\$ 500	\$ 521
60"W	9120R6030	481W	600W	241D	300D	\$ 622	\$ 653	\$ 681
72"W	9120R7230	601W	720W	241D	300D	\$ 710	\$ 746	\$ 779
84"W	9120R8430	721W	840W	241D	300D	\$ 1077	\$ 1130	\$ 1183
96"W	9120R9630	841W	960W	241D	300D	\$ 1103	\$ 1157	\$ 1212
108"W	9120R10830	961W	1080W	241D	300D	\$ 1242	\$ 1303	\$ 1365
120"W	9120R12030	1081W	1200W	241D	300D	\$ 1382	\$ 1450	\$ 1518
36"D								
36"W	9120R3636	301W	360W	301D	360D	\$ 556	\$ 585	\$ 611
42"W	9120R4236	361W	420W	301D	360D	\$ 633	\$ 666	\$ 695
48"W	9120R4836	421W	480W	301D	360D	\$ 711	\$ 747	\$ 780
60"W	9120R6036	481W	600W	301D	360D	\$ 870	\$ 913	\$ 956
72"W	9120R7236	601W	720W	301D	360D	\$ 1025	\$ 1076	\$ 1126
84"W	9120R8436	721W	840W	301D	360D	\$ 1242	\$ 1303	\$ 1365
96"W	9120R9636	841W	960W	301D	360D	\$ 1271	\$ 1334	\$ 1396
108"W	9120R10836	961W	1080W	301D	360D	\$ 1410	\$ 1479	\$ 1550
120"W	9120R12036	1081W	1200W	301D	360D	\$ 1549	\$ 1625	\$ 1703

Worksurfaces

Concensys® — Primary — T-Mold Edge

GSA SIN 711-1


For specification information see pages 38-46.



Description	Model	List Price		
		L1	L2	L3
Primary Worksurfaces				
24"W x 24"D	832424A	\$ 194	\$ 205	\$ 215
30"W x 24"D	832430A	\$ 197	\$ 208	\$ 218
36"W x 24"D	832436A	\$ 210	\$ 221	\$ 232
42"W x 24"D	832442A	\$ 256	\$ 269	\$ 282
48"W x 24"D	832448A	\$ 276	\$ 290	\$ 304
54"W x 24"D	832454A	\$ 302	\$ 317	\$ 333
60"W x 24"D	832460A	\$ 340	\$ 357	\$ 375
66"W x 24"D	832466A	\$ 370	\$ 389	\$ 407
72"W x 24"D	832472A	\$ 388	\$ 409	\$ 427
24"W x 30"D	833024A	\$ 197	\$ 208	\$ 218
30"W x 30"D	833030A	\$ 203	\$ 214	\$ 225
36"W x 30"D	833036A	\$ 228	\$ 240	\$ 252
42"W x 30"D	833042A	\$ 283	\$ 297	\$ 313
48"W x 30"D	833048A	\$ 302	\$ 317	\$ 333
54"W x 30"D	833054A	\$ 335	\$ 352	\$ 369
60"W x 30"D	833060A	\$ 374	\$ 393	\$ 412
66"W x 30"D	833066A	\$ 403	\$ 425	\$ 443
72"W x 30"D	833072A	\$ 436	\$ 459	\$ 479
Note: Add Suffix "N" to model number for no grommet, no upcharge.				
12"W x 12"D Sample Worksurface	831212A	\$ 161	\$ 170	\$ 177

FOR PRIMARY WORKSURFACES TO SPAN A "T" OR EXTENDED STRAIGHT CONNECTION,
ADD SUFFIX AND UPCHARGE.

Suffix	Upcharge
T	\$32



Description	Model	List Price
External Worksurface Support Channel (no color option) — 1 1/2"H		
30"W External Support Channel for use on 42"W Worksurface	Z5SC42 S	\$ 50
36"W External Support Channel for use on 48"W Worksurface	Z5SC48 S	\$ 52
42"W External Support Channel for use on 54"W Worksurface	Z5SC54 S	\$ 59
48"W External Support Channel for use on 60"W Worksurface	Z5SC60	\$ 64
54"W External Support Channel for use on 66"W Worksurface	Z5SC66	\$ 73
60"W External Support Channel for use on 72"W Worksurface	Z5SC72	\$ 79
66"W External Support Channel for use on 78"W Worksurface	Z5SC78	\$ 86
72"W External Support Channel for use on 84"W Worksurface	Z5SC84	\$ 95

E All Concensys models are available in the **Everyday Advantage®** program, see page 10 for details.







How to specify — Select the Concensys Model Number from above.	1st Option: Laminate: See inside front cover for finishes.	2nd Option: T-Mold: See inside front cover for finishes.	3rd Option: Grommet Type: P Plastic M Metal (add \$11 per grommet)	4th Option: Grommet Color (Metal only): EL Matte Silver Note: Plastic grommet color matches trim selection.
83 A .	.	.		E L

Examples: 832424A.LT3B.EY.MEL 832424ATN.LT3B.EY Z5SC42

S Shippable by small-package carrier.

For specification information see pages 38-46.

GSA SIN 711-1



Description	S	Model	List Price		
			L1	L2	L3
Wave Worksurfaces					
30"W x 24"L x 30"R	11½"	8302430A	\$ 235	\$ 247	\$ 260
36"W x 24"L x 30"R	13½"	8362430A	\$ 260	\$ 273	\$ 287
42"W x 24"L x 30"R	15½"	8422430A	\$ 326	\$ 342	\$ 360
48"W x 24"L x 30"R	15½"	8482430A	\$ 347	\$ 364	\$ 382
54"W x 24"L x 30"R	21½"	8542430A	\$ 382	\$ 403	\$ 421
60"W x 24"L x 30"R	27½"	8602430A	\$ 429	\$ 452	\$ 472
66"W x 24"L x 30"R	33¾"	8662430A	\$ 461	\$ 485	\$ 506
72"W x 24"L x 30"R	39¾"	8722430A	\$ 496	\$ 522	\$ 545

30"W x 30"L x 24"R	11½"	8303024A	\$ 235	\$ 247	\$ 260
36"W x 30"L x 24"R	13½"	8363024A	\$ 260	\$ 273	\$ 287
42"W x 30"L x 24"R	15½"	8423024A	\$ 326	\$ 342	\$ 360
48"W x 30"L x 24"R	15½"	8483024A	\$ 347	\$ 364	\$ 382
54"W x 30"L x 24"R	21½"	8543024A	\$ 382	\$ 403	\$ 421
60"W x 30"L x 24"R	27½"	8603024A	\$ 429	\$ 452	\$ 472
66"W x 30"L x 24"R	33½"	8663024A	\$ 461	\$ 485	\$ 506
72"W x 30"L x 24"R	39½"	8723024A	\$ 496	\$ 522	\$ 545

Bow-Front Worksurfaces

Low Profile Worksurfaces				
60"W x 30"D¹ x 36"D²	833660BTA	\$ 648	\$ 681	\$ 712
66"W x 30"D¹ x 36"D²	833666BTA	\$ 706	\$ 742	\$ 775
72"W x 30"D¹ x 36"D²	833672BTA	\$ 759	\$ 797	\$ 834

Note: Add Suffix “N” to model number for no grommet, no upcharge.

E All Concensys models are available in the **Everyday Advantage®** program, see page 10 for details.

<p><i>How to specify —</i></p> <p>Select the Concensys Model Number from above.</p>	<p><i>1st Option:</i></p> <p>Laminate:</p> <p>See inside front cover for finishes.</p>	<p><i>2nd Option:</i></p> <p>T-Mold:</p> <p>See inside front cover for finishes.</p>	<p><i>3rd Option:</i></p> <p>Grommet Type (if applicable):</p> <p>P Plastic M Metal (add \$11 per grommet)</p>	<p><i>4th Option:</i></p> <p>Grommet Color (Metal only):</p> <p>EL Matte Silver</p> <p>Note: Plastic grommet color matches trim selection.</p>
<p>8 .</p>	<p> .</p>	<p> .</p>	<p> </p>	<p>E L </p>


Example: 8302430A.LT3B.EX.P

Worksurfaces


Concensys® — Corner and Corner Shelf — T-Mold Edge

For specification information see pages 38-46.


GSA SIN 711-1



Description	Model	List Price		
		L1	L2	L3
Corner Worksurfaces With Straight Leading Edge				
36"W x 24"D	833624A	\$ 409	\$ 431	\$ 450
42"W x 24"D	834224A	\$ 470	\$ 495	\$ 516
48"W x 24"D	834824A	\$ 495	\$ 521	\$ 543
42"W x 30"D	834230A	\$ 528	\$ 555	\$ 580
48"W x 30"D	834830A	\$ 588	\$ 619	\$ 646
Corner Worksurfaces With Radial Leading Edge				
36"W x 24"D	833624RA	\$ 452	\$ 476	\$ 497
42"W x 24"D	834224RA	\$ 503	\$ 529	\$ 552
48"W x 24"D	834824RA	\$ 525	\$ 552	\$ 577
42"W x 30"D	834230RA	\$ 580	\$ 610	\$ 637
48"W x 30"D	834830RA	\$ 647	\$ 680	\$ 711



Note: Add Suffix "N" to model number for no grommet, no upcharge.



Description	Model	L1	L2	L3
		List Price	List Price	List Price
Corner Shelves with T-Mold Edge				
36" x 36" x 11"D	860536	\$ 460	\$ 485	\$ 506
42" x 42" x 11"D	860542	\$ 478	\$ 504	\$ 526
48" x 48" x 11"D	860548	\$ 453	\$ 476	\$ 496

E All Concensys models are available in the **Everyday Advantage®** program, see page 10 for details.

How to specify — Select the Concensys Model Number from above.	1st Option: Laminate: See inside front cover for finishes.	2nd Option: Paint (Corner Shelves only): <div>C S</div> See inside front cover for finishes.	2nd Option: T-Mold: See inside front cover for finishes.	3rd Option: Grommet Type (if applicable): <div>P Plastic</div> <div>M Metal (add \$11 per grommet)</div>	4th Option: Grommet Color (Metal only): <div>EL Matte Silver</div> Note: Plastic grommet color matches trim selection.
<div>8</div>	<div></div>	<div>P</div>	<div></div>	<div></div>	<div>E L</div>

Examples: 833624RA.LT3B.EX.P 860536.LT3B.P27.E4


S Shippable by small-package carrier.

Worksurfaces


Concensys® — Corner Cove — T-Mold Edge

For specification information see pages 38-46.

GSA SIN 711-1



Description	Model	List Price		
		L1	L2	L3
Corner Cove Worksurfaces — Extended Left				
60" x 36" — 24"L / 24"R	83122EL	\$ 503	\$ 529	\$ 552
60" x 36" — 24"L / 30"R	83132EL	\$ 524	\$ 551	\$ 576
60" x 48" — 24"L / 24"R	83622EL	\$ 588	\$ 619	\$ 646
60" x 48" — 30"L / 24"R	83623EL	\$ 615	\$ 647	\$ 676
60" x 48" — 24"L / 30"R	83632EL	\$ 615	\$ 647	\$ 676
60" x 48" — 30"L / 30"R	83633EL	\$ 636	\$ 669	\$ 699
72" x 36" — 24"L / 24"R	83222EL	\$ 588	\$ 619	\$ 646
72" x 36" — 24"L / 30"R	83232EL	\$ 615	\$ 647	\$ 676
72" x 48" — 24"L / 24"R	83722EL	\$ 749	\$ 787	\$ 823
72" x 48" — 30"L / 24"R	83723EL	\$ 777	\$ 816	\$ 853
72" x 48" — 24"L / 30"R	83732EL	\$ 777	\$ 816	\$ 853
72" x 48" — 30"L / 30"R	83733EL	\$ 799	\$ 839	\$ 877




Corner Cove Worksurfaces — Extended Right				
36" x 60" — 24"L / 24"R	83122ER	\$ 503	\$ 529	\$ 552
36" x 60" — 30"L / 24"R	83132ER	\$ 524	\$ 551	\$ 576
48" x 60" — 24"L / 24"R	83622ER	\$ 588	\$ 619	\$ 646
48" x 60" — 24"L / 30"R	83623ER	\$ 615	\$ 647	\$ 676
48" x 60" — 30"L / 24"R	83632ER	\$ 615	\$ 647	\$ 676
48" x 60" — 30"L / 30"R	83633ER	\$ 636	\$ 669	\$ 699
36" x 72" — 24"L / 24"R	83222ER	\$ 588	\$ 619	\$ 646
36" x 72" — 30"L / 24"R	83232ER	\$ 615	\$ 647	\$ 676
48" x 72" — 24"L / 24"R	83722ER	\$ 749	\$ 787	\$ 823
48" x 72" — 24"L / 30"R	83723ER	\$ 777	\$ 816	\$ 853
48" x 72" — 30"L / 24"R	83732ER	\$ 777	\$ 816	\$ 853
48" x 72" — 30"L / 30"R	83733ER	\$ 799	\$ 839	\$ 877

Note: Add Suffix "N" to model number for no grommet, no upcharge.


E All Concensys models are available in the **Everyday Advantage®** program, see page 10 for details.

How to specify — Select the Concensys Model Number from above. 8 3 E .	1st Option: Laminate: See inside front cover for finishes.	2nd Option: T-Mold: See inside front cover for finishes.	3rd Option: Grommet Type: P Plastic M Metal (add \$11 per grommet)	4th Option: Grommet Color (Metal only): EL Matte Silver Note: Plastic grommet color matches trim selection.
---	--	--	--	---

Example: 83622EL.LT3B.EV.MEL




Support column and flat brackets ordered separately.



Description	Model	List Price		
		L1	L2	L3
Quarter-Round Worksurfaces (outside corner connecting two 90° panel-attached worksurfaces)				
24"W x 24"W	802424A	\$ 261	\$ 274	\$ 288
30"W x 30"W	803030A	\$ 274	\$ 288	\$ 302


D-Shaped Worksurfaces

D-Shaped Worksurface Connects to two 24"D Worksurfaces	832407A	\$ 326	\$ 342	\$ 360
D-Shaped Worksurface Connects to two 30"D Worksurfaces	833007A	\$ 393	\$ 414	\$ 433




Support column and 11" end panels ordered separately.

Note: Cantilever brackets should not be used in place of end panels in this application.



832407A



833007A































E All Concensys models are available in the **Everyday Advantage®** program, see page 10 for details.

How to specify — Select the Concensys Model Number from above.	1st Option: Laminate: See inside front cover for finishes.	2nd Option: T-Mold: See inside front cover for finishes.
8 .	.	.



Example: 832407A.LT3B.EV

For specification information see pages 38-46.

GSA SIN 711-1


	Description	Model	Core Paint P1 List Price	Select Paint P2 List Price	
 Non-handed unit	End-Panel Supports				
	11"D x 29½"H Panel-Mount	CEP1129P 	\$ 176	\$ 209	
	24"D x 29½"H Panel-Mount	CEP2429P 	\$ 189	\$ 222	
	30"D x 29½"H Panel-Mount	CEP3029P 	\$ 206	\$ 239	
 	Support Legs				
	24"D x 29½"H Panel-Mount	CSL2429P 	\$ 167	\$ 200	
	30"D x 29½"H Panel-Mount	CSL3029P 	\$ 182	\$ 215	
	Concensys Open End Panel Supports				
 	12"D x 29½"H Panel-Mount	ACBHEP1229 	\$ 172	\$ 206	
	24"D x 29½"H Panel-Mount	ACBHEP2429 	\$ 181	\$ 215	
	30"D x 29½"H Panel-Mount	ACBHEP3029 	\$ 196	\$ 230	
	Cantilever Bracket — Concensys				
   	12"D Left-Hand	CCB12L 	\$ 46	\$ 57	
	12"D Right-Hand	CCB12R 	\$ 46	\$ 57	
	18"D Left-Hand	CCB18L 	\$ 49	\$ 60	
	18"D Right-Hand	CCB18R 	\$ 49	\$ 60	
	24" or 30"D Left-Hand	CCB24L 	\$ 54	\$ 65	
	24" or 30"D Right-Hand	CCB24R 	\$ 54	\$ 65	
Universal Cantilever					
	24" or 30"D	T624CB 	\$ 131	N/A	
Worksurface-to-Panel Brackets					
	24"D	831324 	\$ 64	\$ 75	
	30"D	831330 	\$ 64	\$ 75	
Worksurface Bracket Kit					
	One Pair	831099 	\$ 46	\$ 57	
Flat Brackets					
	12"D	T612FB 	\$ 41	N/A	
	24"D	831124 	\$ 46	N/A	
	30"D	831130 	\$ 50	N/A	
Note: Flint only.					
Pedestal-to-Panel Attachment Brackets					
	Left-handed	831500L	\$ 75	\$ 86	
	Right-handed	831500R	\$ 75	\$ 86	







E All Concensys models are available in the **Everyday Advantage®** program, see page 10 for details.


How to specify — Select the Concensys Model Number from above.	1st Option: Paint (if applicable):   See inside front cover for finishes.
_____ .	P _____

Example: CEP1129P.P28 831324.P28 831124

 Shippable by small-package carrier.




Description	Model	Core Paint P1 List Price	Select Paint P2 List Price
Modesty Panels			
29½"H x 24"W	CS249 	\$ 151	\$ 170
29½"H x 30"W	CS309 	\$ 156	\$ 175
29½"H x 36"W	CS369 	\$ 160	\$ 179
29½"H x 42"W	CS429 	\$ 164	\$ 183
29½"H x 48"W	CS489 	\$ 167	\$ 186
29½"H x 54"W	CS549 	\$ 169	\$ 188
29½"H x 60"W	CS609	\$ 172	\$ 191
29½"H x 66"W	CS669	\$ 174	\$ 193
29½"H x 72"W	CS729	\$ 180	\$ 199




Stand-alone Corner Modesty Panels

29½"H x 36"W	CSCMP3629	S	\$ 160	\$ 179
29½"H x 42"W	CSCMP4229	S	\$ 164	\$ 183
29½"H x 48"W	CSCMP4829	S	\$ 167	\$ 186
29½"H x 60"W	CSCMP6029		\$ 172	\$ 191
29½"H x 72"W	CSCMP7229		\$ 180	\$ 199







Modesty Panels

14"H x 24"W	CS244	S	\$ 143	\$ 162
14"H x 30"W	CS304	S	\$ 147	\$ 166
14"H x 36"W	CS364	S	\$ 150	\$ 169
14"H x 42"W	CS424	S	\$ 154	\$ 173
14"H x 48"W	CS484	S	\$ 159	\$ 178
14"H x 54"W	CS544	S	\$ 162	\$ 181
14"H x 60"W	CS604		\$ 167	\$ 186
14"H x 66"W	CS664		\$ 169	\$ 188
14"H x 72"W	CS724		\$ 172	\$ 191



Stand-alone Corner Modesty Panels

14"H x 36"W	CSCMP3614		\$ 150	\$ 169
14"H x 42"W	CSCMP4214		\$ 154	\$ 173
14"H x 48"W	CSCMP4814		\$ 159	\$ 178
14"H x 60"W	CSCMP6014		\$ 167	\$ 186
14"H x 72"W	CSCMP7214		\$ 172	\$ 191



Gussets

One pair	CDG	\$	\$ 110	\$ 129
----------	-----	----	--------	--------

E All Concensys models are available in the **Everyday Advantage®** program, see page 10 for details.

How to specify —

Select the
Concensys
Model Number
from above.

1st Option:

Paint:
C S

See inside front cover
for finishes.

C | | | | | | | | | | . P | | |

Examples: CS249.PR3 CS244.P28


S *Shippable by small-package carrier.*

Cadence® Freestanding

Concensys® — Universal Modesty Panels


For specification information see pages 47-55.

GSA SIN 711-2




Description	Model	List Price
Modesty Panels		
41" W	PMP41	\$ 210
47" W	PMP47	\$ 214
53" W	PMP53	\$ 220

Universal Modesty Panels for Concensys Worksurfaces							
	Peninsula			P-Shape	Jetty		Boomerang
Model	60"L	66"L	72"L	72"L	66"L	72"L	72"L
PMP41	•						
PMP47		•		•	•		
PMP53			•			•	•



Angled front

Description	Model	Core Paint P1 List Price	Select Paint P2 List Price
Metal Center Drawer w/Lock			
19"W x 14¼"D x 3"H	CSDC19	\$ 176	\$ 192
<ul style="list-style-type: none"> 12" drawer extension (3/4). Inside drawer dimension: 19"W x 13"D x 2⅝"H. Minimum clearance for mounting: 21¼"W x 19¼"D. 			



Angled front

24½"W x 14¼"D x 3"H	CSDC25	\$ 181	\$ 197
<ul style="list-style-type: none"> 12" drawer extension (3/4). Inside drawer dimension: 24½"W x 13½"D x 2⅝"H. Minimum clearance for mounting: 27⅝"W x 19¼"D. 			

All Concensys models are available in the **Everyday Advantage®** program, see page 10 for details.


How to specify — Select the Concensys Model Number from above. <div> <div></div> <div></div> <div></div> <div></div> <div></div> <div></div> <div></div> <div></div> <div></div> <div></div> </div>	1st Option: Paint: See inside front cover for finishes. <div> <div>P</div> <div></div> <div></div> <div></div> </div>	2nd Option: Lock <i>(if applicable):</i> STD Standard — Random Keyed OMT Omit Lock Core (Deduct \$18 per drawer) <div> <div></div> <div></div> <div></div> <div></div> </div>
--	--	--

Example: PMP41.P27


CSDC19.P28.STD

Shippable by small-package carrier.

Overhead Storage Cabinets




Square Flipper Door




Receding Door with Recessed Pull

Open Bookshelf




Hutch




Square Flipper Door

Overheads & Shelves


Overhead storage components maximize the use of space in the workstation and also provide convenient access to binders, reference materials, software packages, and miscellaneous supplies.

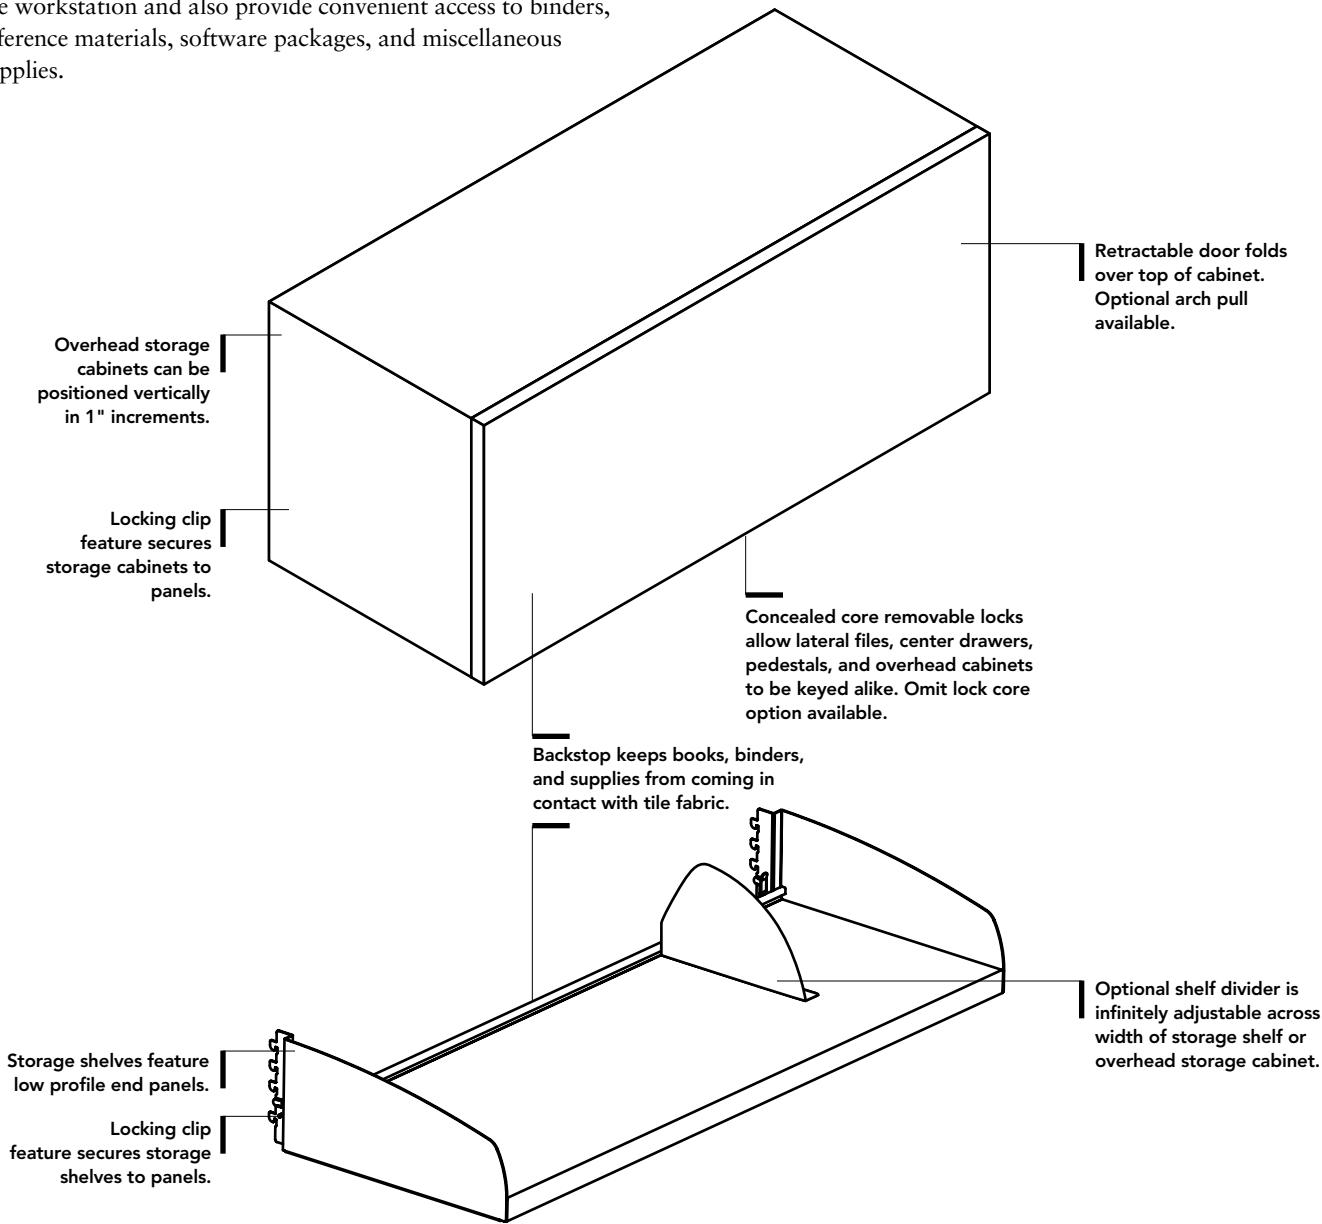

Product dimensions	
Overhead Storage Cabinet	
Width	24" (except receding door), 30", 36", 42", 48", 60" (with 2 doors)
Inside width	$\frac{3}{8}$ " less than width
Depth	14 $\frac{1}{4}$ " (Receding Door is 13 $\frac{3}{4}$ "D)
Inside depth	12 $\frac{7}{8}$ " (Receding Door is 12 $\frac{1}{8}$ "D)
Height	15" (Receding Door is 15"H)
Inside height	12 $\frac{3}{4}$ " (Receding Door is 11 $\frac{5}{8}$ "H)
Bookshelf	
Width	24", 30", 36", 42", 48", 60"
Depth	14 $\frac{1}{4}$ "
Height	6"




Task lights can be mounted beneath storage shelves and overhead storage cabinets. Additional panel hung and freestanding lighting options are available.



Cord retainer clips fasten into panel slots to anchor power cords. Available in black only. Clips are provided with under-shelf mounted task lights. Additional clips can be purchased separately. Painted or fabric covered cord covers are available for Concensys.

Specification Guidelines

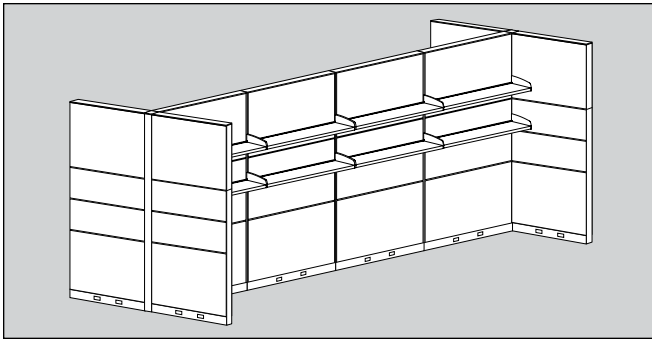


In a panel run, only two overhead storage cabinets or open storage shelves are recommended per panel side. Do not suspend more than one overhead storage unit per side from panels in a panel run which is mounted, at one or both ends, with an off-module connector kit.

When overhead storage units are suspended from stacking frames, the following guidelines should be adhered to:


Stacking frames should be added to all the parent run panels, and to each return-panel run. Stacking panels added to return panel must match the parent run configuration.

A maximum of two overhead storage units should be suspended from each side of stacking frames on any given panel.



With Concensys, a full height panel end cover is required for adequate stability when using overhead storage on the end of a run, or on a return panel.




No limitation to the number of units on structural frames when run is supported with return panels on each side of storage shelves or overhead storage cabinets.



Storage shelf and receding door overhead width must correspond with width of panel(s). It is possible to span two panels when combined panel width equals cabinet or shelf width.

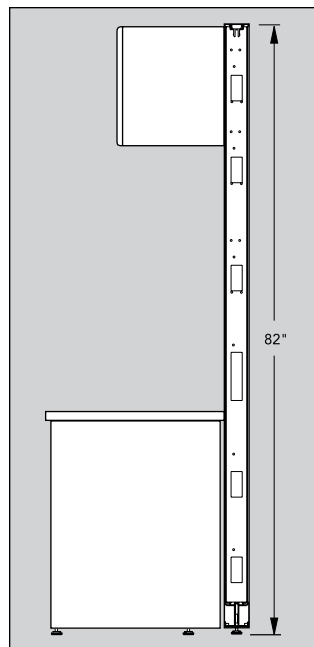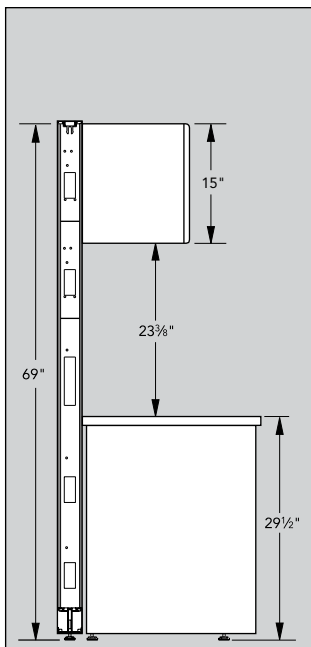

Overhead storage cabinets and open storage shelves can be mounted on Concensys structural and stacking panels to a maximum height of 69" (above left). They may be placed up to the top level of 82"H Concensys structural panels.



Overhead cabinets can be mounted on a panel equal to or up to 18" narrower than cabinet, or on panels wider than the overhead cabinet when using off-module kit. One side of overhead must be held on module.

Overhead Cabinets, Upmount Kit, Bookshelves, and Tackboards

Overhead Cabinets with Flat Doors for Concensys (page 82)

- Storage cabinets have flat flipper doors with square horizontal edges.
- Standard with a factory-installed core removable lock located on the underside of the cabinet.
- Width must correspond with width of panel or 2 panels joined with a straight connector.
- Cabinet has backstop.
- When mounted at an outside “T” connection or at an Extended Straight connection, there will be 2¼" between storage units.
- All units feature an anti-dislodgement device.
- 60" units are one-piece cabinet with two doors and locks.
- Accommodates recessed task lighting (specified separately).
- Storage cabinets are shipped pre-assembled.
- For locking specification, see pages 122-124.
- Cabinets are 14¾"D x 15"H with inside dimensions of 12¾"D x 14¾"H.
- Concensys Essentials overhead cabinets can be mounted on a panel up to 18" narrower than the cabinet by using off-module overhead mounting kit COMBKT. Requires removal of existing vertical bracketry. (For units produced after 2/1/2004.)

Horizontal Wall Track (page 82)

- Allows for mounting Essentials™ overheads on permanent wall structures ONLY.
- NOT for mounting old style Essentials overheads or for receding door units.
- Track is 60"W and notched at 6" intervals as a guide for field cutting.
- Available in black only.
- Attachment hardware is not included.

Upmount Overhead Conversion Kit (page 82)

- Consists of two upmount brackets, full back panel and required installation hardware.
- Available in core and select colors.
- Allows mounting of overhead case up to 13" above height of panel.
- Brackets require a clearance of 6½" below bottom of overhead cabinet.
- Width must correspond with width of panel, or 2 panels joined without a connector.
- Full back panel adds ½" to depth of overhead case.
- Full back panel only used when upmounting cabinet.
- For use with overhead cabinets (except RTA and receding door units) produced after February 1, 2004.

Receding Door Overhead Storage Cabinet (page 82)

- Steel cabinet with open back. Optional back can be ordered separately.
- Arch or square pull optional.
- 60"W cabinet has 2 30"W doors with 2 independent locks.
- Accommodates recessed task lighting — ordered separately.
- For locking specifications, see pages 122-124.
- Cabinets are 13¼"D x 15"H. When door is recessed, interior dimensions are 12½"D x 11½"H.
- Weight Limits:

30"W	70 lbs.
36"W	85 lbs.
42"W	100 lbs.
48"W	110 lbs.
60"W	138 lbs.

Receding Door Overhead Back (page 82)

- Optional for use with receding door overhead.
- Order width to match overhead cabinet.

Open Bookshelves (page 83)

- Width must correspond with width of panel or 2 panels joined with a straight connector.
- When mounted at an outside “T” connection or at an extended straight connection, there will be 2¼" between shelves.
- All units feature an anti-dislodgement device.
- Accommodates recessed task lighting (specified separately).
- Weight Limits:

24"W	61 lbs.
30"W	77 lbs.
36"W	93 lbs.
42"W	108 lbs.
48"W	124 lbs.
60"W	155 lbs.

Tackboards (page 83)

- Use 13"H with half-height shelves hung on 56"H panels.
- Use 18"H with 69"H and 82"H panels.
- Task light cords can be concealed behind tackboards.
- Can only be used on one panel in a 90° junction.
- Brackets come attached for mounting.

Hutches, Dividers, and Tackboards

Stack-on Hutches for Cadence (page 84)

- Stack-on hutches have flipper doors with square horizontal edges. Universal model can be converted to an open hutch.
- Stack-on hutches with doors are standard with a core removable lock (60"W, 66"W, and 72"W have two doors and two locks).
- Hutches mounted on a 29½"H x 1¼" thick worksurface corresponds with the height and look of Essentials overhead cabinets mounted on 69"H Concensys panels.
- Attachment tape provided.
- Order hutch to match width of worksurface(s) it covers.
- Stack-on hutches have a height clearance of 19¾" for computers, etc.
- Depth dimensions 14½" includes thickness of door, inside binder depth 12¾.
- Stack-on hutches are shipped easy-to-assemble.
- Accommodates recessed task lighting (specified separately).
- Chicago task light cords cannot be routed through the hutch end panels, due to the large size of the fused plugs.
- For locking specifications, see pages 122-124.

Dividers (page 84)

- Shelf dividers for use with stack-on hutches.

Tackboards (page 84)






- Use tackboard to close the back of stack-on or hutch below storage unit.
- Due to width of fabric roll, 72"W tackboards are available in railroad cut only.
- Tackboards for use with stack-on hutches.

Overheads

Concensys® — Overheads

For specification information see pages 77-81.

GSA SIN 711-1



Description	Model	Core Paint P1 List Price	Select Paint P2 List Price
Overhead Cabinets w/Square Flipper Doors and Lock — 14 1/8"D x 15"H			
24"W	OH1524FD S	\$ 564	\$ 626
30"W	OH1530FD S	\$ 576	\$ 638
36"W	OH1536FD S	\$ 604	\$ 666
42"W	OH1542FD S	\$ 632	\$ 694
48"W	OH1548FD S	\$ 659	\$ 721
60"W	OH1560FD S	\$ 871	\$ 933

Note: Add Suffix **A** for arch pull or **S** for square pull option — add \$32 per pull.

For "Easy-Assist" on 24"W–48"W models change **FD** suffix to **FE** — add \$191.

Concensys Off-module Overhead Mounting Kit — for use with square flipper door cabinets

COMBKT S	\$ 78	\$ 91
-----------------------	-------	-------

Horizontal Wall Track (Black only)

60"W Tracks TWTH S	\$ 75
---------------------------------	-------

Concensys Upmount Kit for Overhead Cabinets

24"W	CUP24	\$ 151	\$ 173
30"W	CUP30	\$ 157	\$ 179
36"W	CUP36	\$ 165	\$ 187
42"W	CUP42	\$ 170	\$ 192
48"W	CUP48	\$ 179	\$ 201
60"W	CUP60	\$ 193	\$ 215

Description	Model	Core Paint P1 List Price	Select Paint P2 List Price
15"H x 13 1/4"D Receding Door Overheads (Inside dimensions with door recessed — 11 1/8"H x 12 1/8"D)			
30"W	OH1530RD	\$ 660	\$ 722
36"W	OH1536RD	\$ 698	\$ 760
42"W	OH1542RD	\$ 741	\$ 803
48"W	OH1548RD	\$ 802	\$ 864
60"W	OH1560RD	\$ 1214	\$ 1276

Note: Add Suffix **A** for arch pull or **S** for square pull option — add \$32 per pull.

15"H Receding Door Overhead Back

30"W	RD30FB	\$ 88	\$ 110
36"W	RD36FB	\$ 94	\$ 116
42"W	RD42FB	\$ 100	\$ 122
48"W	RD48FB	\$ 107	\$ 129
60"W	RD60FB	\$ 131	\$ 153

E All Concensys models are available in the **Everyday Advantage®** program, see page 10 for details.

How to specify — Select the Model Number from above.	1st Option: Pull (if applicable): A Arch Pull, add \$32 per pull S Square Pull, add \$32 per pull	2nd Option: System for Flipper Door Overhead: CM Concensys System for Receding Door Overhead (if applicable): YZ Concensys, Optimize™, Stride®, or Terrace® Z57 57 1/2"H Stride or Terrace	3rd Option: Paint: G S See inside front cover for finishes.	4th Option: Pull Color (if applicable): Arch: E4 Black EL Silver Square: EL Silver	5th Option: Lock (if applicable): STD Standard OMT Omit Lock Core (Deduct \$18 per door)
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>

Examples: OH1524FDN.CM.P7C.STD OH1560RD.YZ.P7C.STD
OH1536RDA.YZ.P27.E4.OMT COMBKT.P27 TWTH


S Shippable by small-package carrier.

Overheads

Concensys® — Open Bookshelves and Tackboards

For specification information see pages 77-81.

GSA SIN 711-1















Description	Model	Core Paint P1 List Price	Select Paint P2 List Price
Open Bookshelves			
24"W x 13¼"D x 6"H	CSF24	\$ 225	\$ 247
30"W x 13¼"D x 6"H	CSF30	\$ 230	\$ 252
36"W x 13¼"D x 6"H	CSF36	\$ 253	\$ 275
42"W x 13¼"D x 6"H	CSF42	\$ 265	\$ 287
48"W x 13¼"D x 6"H	CSF48	\$ 270	\$ 292
60"W x 13¼"D x 6"H	CSF60	\$ 310	\$ 332







Shelf Dividers			
Package of 6	T7DV	\$ 85	\$ 97

Note: Specify paint color. Shelf dividers can only be used on Persona™ radius and Essentials™ storage cabinets, open bookshelves, and hutches manufactured after 5/17/99. They do not work on receding door cabinets.



Description	Model		List Price		
			Grades A/B	Grades C/D	Grades E/F
Tackboards					
24"W x 13"H	861324		\$ 120	\$ 154	\$ 209
30"W x 13"H	861330		\$ 144	\$ 185	\$ 252
36"W x 13"H	861336		\$ 161	\$ 207	\$ 287
42"W x 13"H	861342		\$ 182	\$ 235	\$ 321
48"W x 13"H	861348		\$ 200	\$ 257	\$ 358
60"W x 13"H	861360		\$ 223	\$ 289	\$ 397
24"W x 18"H	861824		\$ 120	\$ 154	\$ 209
30"W x 18"H	861830		\$ 144	\$ 185	\$ 252
36"W x 18"H	861836		\$ 161	\$ 207	\$ 287
42"W x 18"H	861842		\$ 182	\$ 235	\$ 321
48"W x 18"H	861848		\$ 200	\$ 257	\$ 358
60"W x 18"H	861860		\$ 223	\$ 289	\$ 397



Description	Model	Core Paint P1	Select Paint P2	Fabric Covered List Price		
		List Price	List Price	Grades A/B	Grades C/D	Grades E/F
Cord Covers for Concensys						
13"H Fabric Covered	EL97 	N/A	N/A	\$ 43	\$ 51	\$ 58
13"H Painted	EL96 	\$ 31	\$ 39	N/A	N/A	N/A
18"H Fabric Covered	EL99 	N/A	N/A	\$ 43	\$ 51	\$ 58
18"H Painted	EL98 	\$ 31	\$ 39	N/A	N/A	N/A

Specify paint color or panel fabric.

E All Concensys models are available in the **Everyday Advantage®** program, see page 10 for details.

How to specify — Select the Model Number from above. <div> <div></div> <div></div> <div></div> <div></div> <div></div> <div></div> <div></div> <div></div> <div></div> <div></div> </div>	1st Option: Paint (for Open Bookshelf): See inside front cover for finishes. <div> <div></div> <div></div> <div></div> <div></div> <div></div> <div></div> <div></div> <div></div> <div></div> <div></div> </div>	1st Option: Fabric (for Tackboards): See inside back cover for fabrics. <div> <div></div> <div></div> <div></div> <div></div> <div></div> <div></div> <div></div> <div></div> <div></div> <div></div> </div>
--	--	---

Examples: CSF24.P7D 861324.CS918 EL97.APN911


Shippable by small-package carrier.

Hutches

Concensys® — Stack-on Hutch and Accessories

For specification information see page 81.


GSA SIN 711-1









Description	Model	Core Paint P1 List Price	Select Paint P2 List Price
Universal Stack-on Hutch w/Square Flipper Doors and Lock — 14½"D x 35"H			
36"W	UH6536FD	\$ 650	\$ 715
42"W	UH6542FD	\$ 680	\$ 745
48"W	UH6548FD	\$ 702	\$ 767
60"W	UH6560FD	\$ 996	\$ 1061
66"W	UH6566FD	\$ 1043	\$ 1108
72"W	UH6572FD	\$ 1092	\$ 1157



Shelf Dividers			
Package of 6	T7DV	\$ 85	\$ 97



Description	Model	Core Paint P1 List Price — Fabric			Select Paint P2 List Price — Fabric			
		Grades A/B	Grades C/D	Grades E/F	Grades A/B	Grades C/D	Grades E/F	
20"H Universal Tackboards for Stack-on Hutches								
36"W Tackboard	UHTB36		\$ 293	\$ 379	\$ 524	\$ 313	\$ 399	\$ 544
42"W Tackboard	UHTB42		\$ 309	\$ 398	\$ 550	\$ 319	\$ 418	\$ 570
48"W Tackboard	UHTB48		\$ 336	\$ 435	\$ 601	\$ 356	\$ 455	\$ 621
60"W Tackboard	UHTB60		\$ 375	\$ 485	\$ 672	\$ 395	\$ 505	\$ 692
66"W Tackboard	UHTB66		\$ 395	\$ 511	\$ 708	\$ 415	\$ 531	\$ 728
72"W Tackboard	UHTB72		\$ 416	\$ 541	\$ 746	\$ 436	\$ 561	\$ 766

E All Concensys models are available in the **Everyday Advantage®** program, see page 10 for details.

How to specify — Select the Model Number from above.	1st Option: Pull <i>(if applicable):</i> Add \$32 per pull. A Arch Pull S Square Pull	2nd Option: Paint: See inside front cover for finishes.	3rd Option: Lock <i>(if applicable):</i> STD Standard — Random Keyed OMT Omit Lock Core (Deduct \$18 per door)	3rd Option: Fabric (Tackboard only): See inside back cover for fabrics.	4th Option: Railroad Cut (Tackboard only): (Only applicable to 66" and 72" W Fabric Tackboards.)
_____	_____	P _____	_____	_____	R R _____

Examples: UH6536FDA.P7D.STD UH6536FD.P7D.OMT
 UHTB36.P93.GL9M9 UHTB66.P93.GL9M9.RR

Shippable by small-package carrier.

Storage

Storage Introduction and Overview	86-87
Working with Essentials™ Metal Storage	88-94
Working with Cubby Laminate Storage	95
Support and Suspended Pedestals	96
Mobile Pedestals	97
Basic Support and Mobile Pedestals	98
Accessories and Pedestal Tops for Essentials	99
Personal Files	100
50"H and 65"H Towers.....	101
Lateral Files and Accessories	102
Combination Files, Storage Cabinets, and Bookcases	103
Laminate Tops for Essentials Storage	104
Cubby Laminate Storage and Shelves.....	104


Additional Allsteel Storage Solutions are available in the Storage and Stride Price Lists:

- Align™ Metal and Veneer — Pedestals, Personal Files, Credenzas, Towers, Lockers, Laterals, Combination Files, and Bookcases
- Involve® Laminate — Pedestals, Credenzas, Towers, Stacking Storage, Overheads, Soft Seating, and Bookcases
- Stride Painted Wood — Pedestals, Credenzas, Towers, Combination Files, and Overhead Cabinets

Storage is an essential part of the productive workplace.

Make storage a matter of personal choice as well as necessity. Choose from metal, laminate, or veneer with features like multiple pull styles, drawer sizes, finishes, and more. It's your workspace. Shouldn't it look like it?

PERSONAL STORAGE		LATERALS AND SHARED STORAGE	
1. Pedestal. Support, mobile, or suspended, with three drawer sizes.	3. Personal tower. Versatile storage with a small footprint. It's storage that goes up, not out. Combine drawers, personal storage, and wardrobe options for the right solution.	5. Lateral file. The storage workhorse, in multiple heights and widths. Works with systems furniture or by itself.	7. Storage cabinet. Equipped with hinged, locking doors and adjustable shelves to conceal and secure supplies.
2. Personal file. Combines pedestal and lateral storage to create a personal filing solution for letter and legal size documents.	4. Low credenza. Active storage that creates a layered look in any workspace.	6. Combination file. The perfect combination of file storage and shelf storage, with concealed or open shelves.	8. Bookcases. Quick access to information, in depths to match laterals or narrower profiles to stand on their own.

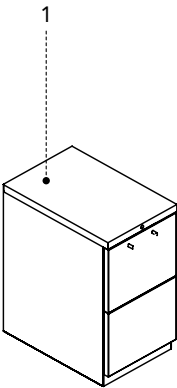

- Additional Allsteel Storage Solutions are available in the Storage and Stride® System Price Lists:**
- Align™ Metal and Veneer — Pedestals, Personal Files, Credenzas, Towers, Lockers, Laterals, Combination Files, and Bookcases
 - Involve® Laminate — Pedestals, Credenzas, Towers, Stacking Storage, Overheads, Soft Seating, and Bookcases
 - Stride Painted Wood — Pedestals, Credenzas, Towers, Combination Files, and Overhead Cabinets

Essentials Pedestals **E**

Support



File/File
28"H x 15"W

18", 19½" **D**, 22½", 28½"D



Box/Box/File
28"H x 15"W

18", 19½" **D**, 22½", 28½"D

Suspended



Box/File
19½"H x 15"W

18", 19½" **D**, 22½"D

Basic Support



File/File
28" x 15"W

19½", 22½"D



Box/Box/File
28"H x 15"W

19½", 22½"D

Mobile



File/File
28"H x 15"W

18", 19½" **D**, 22½", 28½"D



Box/Box/File
28"H x 15"W

18", 19½" **D**, 22½", 28½"D



Box/File
22½"H x 15"W
22½"D

Basic Mobile



File/File
28"H x 15"W
19½", 22½"D



Box/Box/File
28"H x 15"W
19½", 22½"D

D Discontinued 6/30/2017


Essentials™ Metal Storage

Working with Pedestals

GSA Reference Page


Essentials Pedestals

- File drawers can accommodate front-to-back filing on all models, and side-to-side filing on 22 $\frac{7}{8}$ "D and 28 $\frac{7}{8}$ "D models.
- Support pedestals of a maximum depth, relative to the worksurface depth, result in one panel receptacle position being inaccessible.
- 22 $\frac{7}{8}$ "D units cannot be used with 24"D Concensys Freestanding.
- 28 $\frac{7}{8}$ "D units cannot be used with any 30"D Concensys Freestanding or any 24"D panel-hung worksurface.
- For locking specifications, see pages 122-124.
- Leveling capacity is 2" on 28"H pedestals.




Support pedestals

can support one end of a panel-attached worksurface, in lieu of other worksurface supports by using a 28"H support pedestal but cannot be used to support freestanding desking without an end panel.



Suspended pedestals mount to the underside of the worksurface using keyhole slots in top of pedestals. Do not mount suspended pedestals on bridges or peninsulas. Always mount suspended pedestals at end of worksurfaces.

- When using suspended units on systems, a return panel should extend 18" minimum beyond leading edge of worksurface on which unit(s) is mounted.



Mobile Pedestals can be used to provide flexible storage. The nominal height of a mobile pedestal is equal to that of a freestanding pedestal of equivalent design. There is no need to add extra height for the casters.

28"H mobile pedestals can be nested under worksurfaces mounted at 29 $\frac{1}{2}$ "H.


Mobile pedestals cannot be leveled. Take this into consideration when planning offices which may have uneven floors.

Pedestal Compatibility with Cadence Desking and Systems Worksurfaces

Pedestal Depth	Cadence Freestanding		Systems Panel-hung Worksurfaces	
	24" Deep	30" Deep	24" Deep	30" Deep
18"	Yes	Yes	Yes	Yes
19 $\frac{7}{8}$ "	Yes*	Yes	Yes*	Yes
22 $\frac{7}{8}$ "		Yes	Yes*	Yes
28 $\frac{7}{8}$ "				Yes*

*Wire management grommet is blocked in these applications.

Note: Pedestal placement may affect access to receptacles in base pathway.



Worksurface height mobile and worksurface supporting pedestals have a taller base plate, resulting in a taller overall cabinet height. Consideration must be made to ensure that units align visually with each other and with selected Essentials lateral files. The accompanying chart will help you select the correct pedestal for your application.

Essentials Pedestal Model begins with	Style	Overall Height	Base Height	Spacer required below worksurface	Units align with these Essentials Lateral Models begin with
xx11	Seat height	22 $\frac{1}{2}$ "	2"	na	na
xx14	Suspended	19 $\frac{1}{2}$ "	na	na	na
xx18, xx38	Worksurface height mobile	28"	3 $\frac{1}{8}$ "	na	ELF8 (2-high only)
xx19, xx39	Worksurface supporting**	28"	3 $\frac{1}{8}$ "	no	ELF8 (2-high only)

*Units will support conventional 29 $\frac{1}{2}$ " high worksurfaces.

Essentials Pedestals

Essentials Support and Suspended Pedestals (page 95)

- Steel, ball-bearing slide suspension with full-extension on file drawers, 90% extension on box drawers.
- File drawer has high sides to allow front-to-back filing.
- Side-to-side filing utilizes follower block and cross rail.
- Follower block (APFB80) sold separately.
- Cross rail is standard in all pedestals.
- Pencil tray included — one per pedestal with box drawers.
- For improved aesthetics on 28"H pedestals, order flush mount kick plates.
- Support units have four leveling glides.
- Counterweight is standard in mobile pedestals.
- Support pedestals not used to support a worksurface require a counterweight kit — order separately.
- Box drawers have adjustable divider.
- Caster package available to field convert support pedestals to mobile.
- Standard core removable locks. See pages 122-124.

Essentials Mobile Pedestals (page 95)

- Steel, ball-bearing slide suspension with full-extension on file drawers, 90% extension on box drawers.
- File drawer has high sides to allow front-to-back filing.
- Side-to-side filing utilizes follower block and cross rail.
- Follower block (APFB80) sold separately.
- Cross rail is standard in all pedestals.
- Pencil tray included — one per pedestal with box drawers.
- Counterweight is standard in mobile pedestals.
- Box drawers have adjustable divider.
- Rear casters swivel, front casters are fixed.
- Standard core removable locks. See pages 122-124.
- Adjustable glide kit available to field convert mobile pedestals to freestanding.
- Casters on box/file mobile pedestal require installation.
- For improved aesthetics on 28"H pedestals, order flush mount kick plates.

Essentials Basic Support Pedestals (page 96)

- Steel, ball-bearing slide suspension with 90% extension on file drawers, and 75% extension on box drawers.
- Follower block (APFB80), pencil tray (A2280-000), and adjustable divider (PD80) for box drawers sold separately.
- Side-to-side filing utilizes two cross rails (AP519495) sold separately.
- File drawer has high sides to allow front-to-back filing.
- Support pedestals not used to support a worksurface require a counterweight kit sold separately.
- Caster package available to field convert support pedestals to mobile.
- Standard core removable locks. See pages 122-124.
- Adjustable glide kit available to field convert mobile pedestals to freestanding.
- For improved aesthetics on 28"H pedestals, order flush mount kick plates.

Essentials Basic Mobile Pedestals (page 96)

- Steel, ball-bearing slide suspension with 90% extension on file drawers, and 75% extension on box drawers.
- Follower block (APFB80), pencil tray (A2280-000), and adjustable divider (PD80) for box drawers sold separately.
- Side-to-side filing utilizes two cross rails (AP519495) sold separately.
- File drawer has high sides to allow front-to-back filing.
- Counterweight is standard in mobile pedestals.
- Support pedestals not used to support a worksurface require a counterweight kit sold separately.
- Caster package available to field convert support pedestals to mobile.
- Standard core removable locks. See pages 122-124.
- Adjustable glide kit available to field convert mobile pedestals to freestanding.
- For improved aesthetics on 28"H pedestals, order flush mount kick plates.

Essentials Seat Cushion (page 97)

- Seat cushion provides quick and convenient additional seating.
- Seat cushion adds approximately 2"H to pedestal.
- YPPA prefix models have stitched corners and bumpers on bottom.
- ASPT prefix models have wrap around corners and attach with double-sided tape.
- COM yardage for seat cushion is $\frac{2}{3}$ yard.

	Description	Model	Core Paint P1 List Price	Select Paint P2 List Price
	Support Pedestals 28"H — File/File			
	18"D x 15"W*	PF198-182 □	\$ 641	\$ 703
	19"D x 15"W	PF198-202 □ D	\$ 641	\$ 703
	22"D x 15"W	PF198-232 □	\$ 668	\$ 730
	28"D x 15"W	PF198-302 □	\$ 688	\$ 750
	NOTE: 28"H pedestals have a higher base plate resulting in a taller overall cabinet height. Consideration must be given to ensure that units align visually with each other and selected laterals.			
	Support Pedestals 28"H — Box/Box/File			
	18"D x 15"W*	PF197-183 □	\$ 641	\$ 703
	19"D x 15"W	PF197-203 □ D	\$ 641	\$ 703
	22"D x 15"W	PF197-233 □	\$ 668	\$ 730
	28"D x 15"W	PF197-303 □	\$ 688	\$ 750
	Suspended Pedestals 19½"H — Box/File			
	18"D x 15"W*	PH149-182 □	\$ 535	\$ 597
	19"D x 15"W	PH149-202 □ D	\$ 535	\$ 597
	22"D x 15"W	PH149-232 □	\$ 559	\$ 621
	Mobile Pedestal 28"H — File/File			
	18"D x 15"W*	PM188-182 □	\$ 668	\$ 730
	19"D x 15"W	PM188-202 □ D	\$ 668	\$ 733
	22"D x 15"W	PM188-232 □	\$ 692	\$ 757
	28"D x 15"W	PM188-302 □	\$ 714	\$ 779
	Mobile Pedestal 28"H — Box/Box/File			
	18"D x 15"W*	PM187-183 □	\$ 668	\$ 730
	19"D x 15"W	PM187-203 □ D	\$ 668	\$ 733
	22"D x 15"W	PM187-233 □	\$ 692	\$ 757
	28"D x 15"W	PM187-303 □	\$ 714	\$ 779
	Note: 28"H pedestals have a higher base plate resulting in a taller overall cabinet height. Consideration must be given to ensure that units align visually with each other and selected laterals.			
	Mobile Pedestal 22½"H — Box/File			
	22"D x 15"W	PM119-232 □	\$ 568	\$ 633
	*18"D Pedestals do not accommodate legal size filing.			

D Discontinued 6/30/2017

E All Essentials models are available in the **Everyday Advantage®** program, see page 10 for details.

How to specify — Select the Model Number from above. P 1 -	1st Option: Drawer Pull: A Arch B Beveled I Integral S Square	2nd Option: Paint: C S See inside front cover for finishes.	3rd Option: Pull Color: Arch Pull EL Matte Silver E4 Black Square Pull EL Matte Silver	4th Option: Lock Option: STD Standard OMT Omit Lock Core (Deduct \$18)
---	--	--	--	--







Examples: PH149-232B.P02.STD PF197-233A.P27.EL.STD

Essentials™ Metal Storage

Basic Support and Mobile Pedestals

For specification information see pages 88-89.


GSA SIN 711-1



Description	Model	Core Paint P1 List Price	Select Paint P2 List Price
Support Pedestals 28"H — File/File			
19"D x 15"W	AF398-202 □	\$ 577	\$ 639
22"D x 15"W	AF398-232 □	\$ 597	\$ 659
Support Pedestals 28"H — Box/Box/File			
19"D x 15"W	AF397-203 □	\$ 577	\$ 639
22"D x 15"W	AF397-233 □	\$ 597	\$ 659
Mobile Pedestal 28"H — File/File			
19"D x 15"W	AM388-202 □	\$ 588	\$ 653
22"D x 15"W	AM388-232 □	\$ 609	\$ 674
Mobile Pedestal 28"H — Box/Box/File			
19"D x 15"W	AM387-203 □	\$ 588	\$ 653
22"D x 15"W	AM387-233 □	\$ 609	\$ 674
Support Pedestals 28"H — File/File (partial top)			
19"D x 15"W	P281520FF □	\$ 526	\$ 586
22"D x 15"W	P281523FF □	\$ 545	\$ 605
Support Pedestals 28"H — Box/Box/File (partial top)			
19"D x 15"W	P281520BBF □	\$ 526	\$ 586
22"D x 15"W	P281523BBF □	\$ 545	\$ 605

Note: 28"H pedestals have a higher base plate resulting in a taller overall cabinet height. Consideration must be given to ensure that units align visually with each other and selected laterals.


E All Essentials models are available in the **Everyday Advantage®** program, see page 10 for details.

How to specify — Select the Model Number from above.	1st Option: Drawer Pull: A Arch B Beveled I Integral S Square Partial top models limited to "B" Beveled pulls.	2nd Option: Paint:  See inside front cover for finishes.	3rd Option: Pull Color: Arch Pull EL Matte Silver E4 Black Square Pull EL Matte Silver	4th Option: Lock Option: STD Standard OMT Omit Lock Core (Deduct \$18)
	.	P .	.	

Examples: AF397-203B.P27.STD AF398-232A.P02.E4.STD
 AM387-203I.P27.STD P281520FFB.P27.STD

For specification information see pages 88-89.



GSA SIN 711-1, 711-2

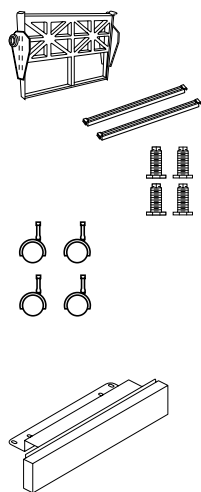

Description	Model	Core Paint P1 List Price	Select Paint P2 List Price
Accessories			
Pencil Tray (Black only)	A2280-000	\$ 29	N/A
Follower Block — 1-Pack	APFB80	\$ 29	N/A
Box Drawer Divider — 2 Pack	PD80	\$ 25	N/A
Hanging File Cross Rails — 2-Pack (for side-to-side filing)	AP519495	\$ 23	N/A
Adjustable Glides — 4-Pack	AP20040AG	\$ 47	N/A
Field-installable Hardware included			
Caster Package — Field Installable Four Casters (2 swivel, 2 fixed)	AP1050CST	\$ 30	N/A
Counterweights for 22½"H and 26⅞"H Pedestals (do not specify color)	2282-300	\$ 147	N/A
Counterweights for 28"H Pedestals (do not specify color)	2282-400	\$ 161	N/A
Flush Front Kick Plate for 28"H Pedetals	ETKP28H	\$ 82	\$ 91



Description	Model	L1 List Price	L2 List Price	L3 List Price
Laminate Tops – Flat Edge (for mobile and freestanding pedestals)				
19"D x 15"W x 1¼" Thick	PT17-20TTP	\$ 167	\$ 175	\$ 184
22¾"D x 15"W x 1¼" Thick	PT17-23TTP	\$ 191	\$ 200	\$ 210
28"D x 15"W x 1¼" Thick	PT17-29TTP	\$ 225	\$ 237	\$ 248



ASPT-24SC

Description	Model	List Price											
		Grade 1	Grade 2	Grade 3	Grade 4	Grade 5	Grade 6	Grade 7	Grade 8	Grade 9	Grade 10	Grade 11	Grade 12
Seat Cushion — For Metal Mobile Pedestals only (Specify seating fabric — no leathers)													
23½"D	ASPT-24SC	\$ 168	\$ 208	\$ 208	\$ 220	\$ 238	\$ 254	\$ 269	\$ 286	\$ 303	\$ 303	\$ 336	\$ 367
29½"D	ASPT-30SC	\$ 175	\$ 205	\$ 205	\$ 214	\$ 227	\$ 239	\$ 249	\$ 262	\$ 275	\$ 275	\$ 299	\$ 322
23"D	YPPA2415SC	\$ 168	\$ 196	\$ 213	\$ 231	\$ 251	\$ 268	\$ 287	\$ 308	\$ 324	\$ 345	\$ 391	\$ 438
29"D	YPPA3015SC	\$ 175	\$ 205	\$ 223	\$ 242	\$ 263	\$ 280	\$ 300	\$ 322	\$ 339	\$ 361	\$ 410	\$ 459

E All Essentials models are available in the **Everyday Advantage®** program, see page 10 for details.

How to specify — Select the Model Number from above. Add FC to end of seat cushion model for CTB133 / Boston Fire Code / NY/NJ Port Authority (\$100 extra)	1st Option: Laminate (Tops only): See inside front cover for finishes.	2nd Option: Edge Color (Flat and T-Mold Edge only): See inside front cover for finishes.	3rd Option: Paint: Kick Plate only. See inside front cover for finishes.	Only Option for Seat Cushion: Upholstery: Specify seating upholstery.
<div style="border-bottom: 1px solid black; width: 100%; height: 20px;"></div>	<div style="border-bottom: 1px solid black; width: 100%; height: 20px;"></div>	<div style="border-bottom: 1px solid black; width: 100%; height: 20px;"></div>	<div style="border-bottom: 1px solid black; width: 100%; height: 20px;"></div>	<div style="border-bottom: 1px solid black; width: 100%; height: 20px;"></div>

Example: PT17-20TTP.TM20.E4

Shippable by small-package carrier.

EXTENSIONS

Introduction

Overview	105
----------------	-----

Organization Tools

Working with Organization Tools.....	106-108
Tool Rails	109
Work Tools.....	110
Marker Boards, Technology Modules, and Drawers	111

Ergonomic Accessories

Working with Ergonomic Accessories	112-115
Keyboard Supports, CPU Hammock, Corner Sleeve, and Footrest.....	116
Monitor Arms and Tablet Holders.....	117

Illumination

Working with Illumination.....	118-119
Task Lights	120
Undercabinet LED Lights, Link™ LED Lights, and Wand™ LED Light.....	121

Extensions — Introduction

Extensions accessory line by Allsteel is designed to help you create your own space.

• Create a unique space

Each person is unique, no one person works exactly like another, and different tasks require different tools. Extensions work tools allow each person the ability to create a unique environment that is all their own. Lots of paper to manage? Need active files within arm's reach? Want to maximize your worksurface space? Need light somewhere other than below a cabinet? Whatever the task, we have the tools to accommodate your workstyle.

• Create a comfortable space

With a full line of organization, ergonomic, and illumination tools, Extensions allow you to create a comfortable, ergonomic work area. Organization tools keep important items visible and within your reach. Ergonomic tools help you stay comfortable while working. Illumination tools allow you to put your light where it suits you.

• Create an organized space

Tired of all the piles of paper building up on your worksurface? Organization tools house your materials and keep them in an orderly fashion. With a combination of hanging or freestanding organizational accessories, Extensions let you manage everything from binders to paper clips.

• Organization tools

Work tools are a durable metal construction. Extensions allow you to manage your workspace smartly with tools like the phone caddy to elevate the phone off the worksurface, landscaped mail box trays to minimize worksurface intrusion, folder holders and tool box pencil and CD holders that hang off the slat rail and each other.

Increase your efficiency with organization!

• Ergonomic tools

Ergonomics is more than just comfort, it's flexibility and safety. The adjustable keyboard options allow users to maintain and vary comfortable wrist and arm positions throughout the day, whether typing or mousing. Monitor Arms offer versatile adjustability while providing optimum comfort for the eyes, neck, and shoulders.

• Illumination tools

Sleek and flexible, our lighting components offer you several choices. Recessed task lights conserve space and feature electronic ballast for longer bulb life and cooler operating temperature. LED tasklights' slim design blends in with its surrounding while utilizing energy-efficient LED technology. The Link light offers award-winning style to a highly versatile and energy efficient light.

Extensions™

Working with Organization Tools

GSA Reference Page


Allsteel's tool rail works in conjunction with a variety of accessories. Modular accessories free up worksurface space and provide orderly storage that is well within reach. Units can be arranged and rearranged to respond to changing workflow. The work tools that attach to the tool rail are:

- Mail Box
- Folder Holder
- Phone Caddy
- Binder Bin
- Tool Box
- Clip Caddy™
- Sidebar™ Personal Shelf
- Paper Wave™
- Gripper Clip

Additional accessories that work with the **tool rail work tools** aesthetically are:

- Bookends
- Freestanding Mail Box

Coat hooks, marker boards and center drawers round out the organization offering.

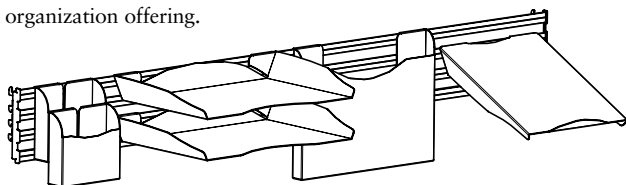

Tool rail, shown above, is height-adjustable in 1" increments using slots in panels or metal hutch. Tool rail shown with two tool boxes, two mail boxes, folder holder, and phone caddy. Folder holders and binder bins extend below a tool rail. Paper Wave and contents extend above a tool rail.



Tool Rails and Work Tools (page 109)

- Sturdy aluminum extrusion with steel support construction.
- Powder coated for durable finish.
- Use to hang Extensions tools. Cannot be used to support monitor arms.
- Suggested weight capacity not to exceed 80 lbs.
- Consideration needs to be given to height of tools and location of worksurfaces.
- For use with Stride®, Terrace®, Concensys®, and Optimize™ systems.
- 5" high rail (widths coordinate with panels).
- Attachment via vertical reveals.
- Can be hung from wall track. Good solution for above copiers.
- Systems tool rail is off-modular — can be used on a panel of equal width or one size smaller.
- May span two panels of appropriate size, i.e., 60" W Tool Rail on two 30" W panels.

Tool Rail for Hutches (page 109)

- Will work on Universal, Terrace, Optimize, and Concensys system hutches produced after July 2, 2000 and Align™ metal hutches.
- Sturdy aluminum extrusion with steel support construction.
- Powder coated for durable finish.
- Use to hang Extensions tools. Cannot be used to support monitor arms.
- Suggested weight capacity not to exceed 80 lbs.
- Consideration needs to be given to height of tools and location of worksurfaces.

Mail Box (page 110)

- Holds standard letter-size paper and inter-office envelopes.
- Minimal horizontal intrusion.

Folder Holder (page 110)

- Holds manila envelopes.
- Is capable of hanging on other folder holders to maximize space.
- Stores vertically for easy access to files.

Phone Caddy (page 110)

- Holds telephone at optimum ergonomic angle.
- Wire management cut-outs.
- Accommodates standard phone sizes.

Binder Bin (page 110)

- Holds folders, binders, and manuals.

Tool Box (page 110)

- Holds pencils and other writing utensils, large post-it notes, and other desk top accessories.

Clip Caddy™ (page 110)




- Holds paper clips and other small objects.


Sidebar™ Personal Shelf (page 110)

- Holds office supplies and personal effects.

Paper Wave™ (page 110)

- Provides 3 fully divided slots for organizing files.
- Keeps papers from "bowing" at bottom.





Gripper Clip (page 110)

- Binds project papers together.
- Mounts to tool rail or tool tile.

Bookends (page 110)


- Can be used on shelves or in cabinets.
- Used to hold books, binders, and catalogs upright.

Freestanding Mail Box (page 110)

- Incorporates similar aesthetic to mounted Mail Box.
- Mounting brackets allow for free access from front and back.
- Sold in pairs of two; will stack up to eight high.
- Individual mail box dimension = 1 3/4" H.
- Stacking brackets are black.

Coat Hook APMC6 (page 110)

- Hangs directly into slotted Stride®, Terrace®, Optimize™, or Concensys® panel frame.
- Use for coat or bag.
- Package of six.
- Available in black only.



Power/Data Modules — Clamp On Worksurface (page 111)

- On-surface mounting option, fits on any worksurface with a 4" overhang.
- 6' Power cord. UL Listed.
- Includes adapters to allow use of commercially available data terminals or blanks to fill unused openings. Many of the AMP, AT&T, Krone, Leviton and most commercial data terminals can be used.

Power/Data Modules — Clamp On Worksurface (page 111)

- Worksurface clamp can be used on any surface with a 2 1/2" overhang.
- Must be installed at time of initial worksurface installation if installing between a worksurface and panel.
- 6' Power cord. UL Listed.
- The USB hub allows simultaneous powering of 2 USB-A devices. The USB hub is a charger only, no ability to connect to a PC. The charging capacity is limited and may not charge all devices.

Power/Data Modules — Under Worksurface (page 111)

- Under surface mounting can be used on any surface with a 5" clearance.
- 6' Power cord. UL Listed.

Technology Modules (page 111)

- Can be mounted by clamping to worksurface or mounting flush to the worksurface top.
- Must be installed at time of initial worksurface installation if mounting between a worksurface and panel.
- The USB hub allows simultaneous powering of four USB-A devices. The USB hub is a charger only, no ability to connect to a PC. The charging capability is limited and may not charge all devices.
- Opening size needed to flush mount in worksurface.

Model	Depth of Cut	Width of Cut
A87P2U1R	4"	8"


Byrne's Docking Station for iPod® and iPhone® (page 111)

- The iDoc charges and syncs with patent pending Roc.in.Doc™ technology eliminating the need for charging adapters.
- The mount provides quick access to the iPod or iPhone display for easy user control.
- Contact Byrne to check for compatibility with the latest technology.


Worksurface Power/Data Module (page 111)

- Provides easy access to technology at primary worksurface.
- Mounts to edge of a worksurface and requires 3/8" gap. Consider whether 3/8" gap will work with layout.
- Must be mounted at time of initial worksurface installation if mounting between a worksurface and a panel. Maintaining 3/8" gap may not be possible with worksurfaces that are panel wrapped.




**Marker Board** (page 111)

- For use with dry marking pens.
- Hangs directly on Optimize™ or Concensys® panel frame.
- Brackets are installed for Concensys applications.
- Brackets must be field re-located for use with other systems.
- Porcelain-coated steel surface.
- White with silver trim.
- Width must correspond with width of panel.

**Metal Center Drawers** (page 111)

- All metal center drawers feature pencil trays with three compartments for storage.
- Center drawers will not fit in center of 24" D worksurfaces which are wider than 60" due to location of center support bracket.
- For locking specifications, see pages 122-124.
- Ball-bearing slide suspension.

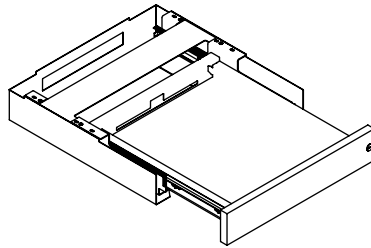
**Laptop Drawer — U7WDA** (page 111)

- Drawer body made of sheet metal.
- Drawer front made of 3/4" particle board with high pressure laminate on both sides and fused laser edge banding.
- Core removable lock is located on right side drawer front
- 17 5/8" W x 18" D x 3 3/8" H Outside (interior 13" W x 16" D x 1 7/8" H)
- Minimum surface depth is 21" for surfaces not using an external stiffener; and 27" for surfaces using an external stiffener.
- Drawer extends 16"
- Maximum load: 45 lbs (functional BIFMA load)
- Drawer assembly and cover have cut out in back to allow for cables to exit drawer.
- Distance from floor to bottom of unit w/glides fully retracted is 24 3/4".
- Does not interfere with Further leg mounting plates so drawer can be placed directly next to either a system or table leg.
- When being placed next tower storage using the tower ell bracket (Z6LB) to support surface the drawer must be inset 3" to clear the ell bracket.
- Can be placed directly next to any support storage from any Allsteel product line (excluding towers).
- Flat brackets — drawer must be offset 3" from seam between surfaces to clear the bracket. See illustration at left.
- Can be used with rabbet edge worksurface models but there will be a larger reveal between surface and drawer.
- Can be used with knife edge worksurface models but reveal and depth need to be considered.

Flat Brackets



Front View

Top View

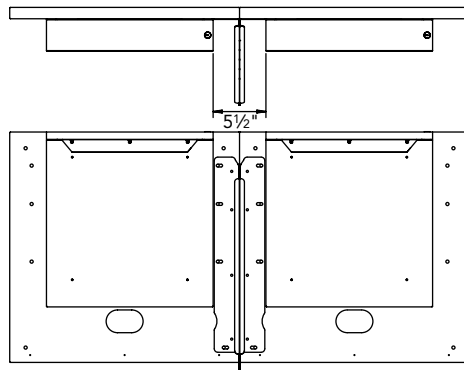

For specification information see pages 106-107.

GSA SIN 711-1



Description	Model	Core Paint P1 List Price	Select Paint P2 List Price
5"H Tool Rails — for Panels			
24" W	EASR24	\$ 153	\$ 183
30" W	EASR30	\$ 162	\$ 192
36" W	EASR36	\$ 171	\$ 201
42" W	EASR42	\$ 178	\$ 208
48" W	EASR48	\$ 182	\$ 212
60" W	EASR60	\$ 214	\$ 244
5"H Tool Rails — for Metal Hutches			
36" W	EAHSR36	\$ 171	\$ 200
42" W	EAHSR42	\$ 178	\$ 207
48" W	EAHSR48	\$ 182	\$ 211
60" W	EAHSR60	\$ 214	\$ 243
66" W	EAHSR66	\$ 222	\$ 251
72" W	EAHSR72	\$ 237	\$ 266

E All Extensions models are available in the **Everyday Advantage®** program, see page 10 for details.

<p>How to specify —</p> <p>Select the Model Number from above.</p>	<p>1st Option:</p> <p>Paint:</p> <p> </p> <p>See inside front cover for finishes.</p>
<div style="display: flex; justify-content: space-around; align-items: center;"> <div style="border: 1px solid black; width: 100px; height: 100px; position: relative;"> <div style="position: absolute; top: 0; left: 0; right: 0; bottom: 0; border: 1px solid black;"></div> </div> <div style="border: 1px solid black; width: 100px; height: 100px; position: relative;"> <div style="position: absolute; top: 0; left: 0; right: 0; bottom: 0; border: 1px solid black;"></div> </div> </div>	<div style="display: flex; justify-content: space-around; align-items: center;"> <div style="border: 1px solid black; width: 100px; height: 100px; position: relative;"> <div style="position: absolute; top: 0; left: 0; right: 0; bottom: 0; border: 1px solid black;"></div> </div> <div style="border: 1px solid black; width: 100px; height: 100px; position: relative;"> <div style="position: absolute; top: 0; left: 0; right: 0; bottom: 0; border: 1px solid black;"></div> </div> </div>

Example: EASR36.P02

























Shippable by small-package carrier.

Extensions™



Organization Work Tools

For specification information see pages 106-107.

GSA SIN 711-1


	Description	Model	Core Paint P1 List Price	Select Paint P2 List Price
	Mail Box 9"D x 15"W	EAPT 	\$ 77	\$ 91
	Folder Holder 9"H x 12"W	EAFS 	\$ 79	\$ 93
	Phone Caddy 9"W x 11"D	EATS 	\$ 96	\$ 110
	Binder Bin 8½"H x 5¼"W x 10"D	EABS 	\$ 77	\$ 91
	Tool Box 5"H x 5¼"W x 1½"D	EADH 	\$ 62	\$ 76
	Clip Caddy™ 2"H x 7"W x 3½"D	EAAC 	\$ 56	\$ 70
	Sidebar™ Personal Shelf 2"H x 21"W x 7"D	EAPS 	\$ 79	\$ 93
	Paper Wave™ Tray size: 2½"H x 6"W x 10"D Dividers: 9½"H x 9"W	EASS 	\$ 109	\$ 123
	Gripper Clip Package of 2 — 5"W x 2"H	EAPC 	\$ 79	\$ 93
	Bookends (specify paint color) Pair — 8"H x 6"W x 4"D	EABE 	\$ 74	\$ 88
	Freestanding Mail Box (specify paint color) Pair — 4⅞"H x 13¼"W x 9"D	EAFT 	\$ 157	\$ 171
	Coat Hooks (black only) Package of six	APMC6 	\$ 77	N/A

E All Extensions models are available in the **Everyday Advantage®** program, see page 10 for details.


How to specify — Select the Model Number from above.	1st Option: Paint:   See inside front cover for finishes.
<div><div></div><div></div><div></div><div></div><div></div></div>	<div><div>P</div><div></div><div></div><div></div><div></div></div>

Examples: EAPT.P4J EABE.P4J APMC6.P

 Shippable by small-package carrier.




Description	Model	List Price
Marker Board		
36"W x 24"H	AMRK36	\$ 442
42"W x 24"H	AMRK42	\$ 481
48"W x 24"H	AMRK48	\$ 497



Description	Model	List Price
Power/Data Modules — Worksurface Clamp		
Dome — 2 Power, 2 Open Data with faceplate adaptors (FOG Fog only)	ACOMDOME2	\$ 291
2 Power, 2 USB (SNW Snow or STRM Storm)	APWRMOD2WC	\$ 400
3 Power (SNW Snow or STRM Storm)	APWRMOD3WC	\$ 310

Power/Data Modules — Under Worksurface Mount		
2 Power, 2 USB (SNW Snow or STRM Storm)	APWRMOD2UWM	\$ 400
3 Power (SNW Snow or STRM Storm)	APWRMOD3UWM	\$ 310




Technology Modules — Worksurface Clamp (EL Silver only)		
2 Power, 2 dual USB Hubs	A87P2U1C	\$ 605
2 Power, 1 iPod Hub	A87P2D1C	\$ 740
2 Power, 1 USB, and 1 iPod Hub	A87P2U1D1C	\$ 902

Technology Modules — Flush Mount (EL Silver only)		
2 Power, 1 USB Hub	A87P2U1R	\$ 645




Worksurface Power/Data Module (PR6 Silver only)		
2 Simple receptacles, 1 data position	A870302	\$ 227




Angled front

Description	Model	List Price		
		P1 Core	P2 Select	P3 Accent
Metal Center Drawer w/Lock				
19"W x 14¼"D x 3"H	CSDC19	\$ 176	\$ 192	N/A
<ul style="list-style-type: none"> 12" drawer extension (3/4). Inside drawer dimension: 19"W x 13"D x 2⅝"H. Minimum clearance for mounting: 21¼"W x 19¼"D. 				



Angled front

24½"W x 14¼"D x 3"H	CSDC25	\$ 181	\$ 197	N/A
<ul style="list-style-type: none"> 12" drawer extension (3/4). Inside drawer dimension: 24½"W x 13½"D x 2⅝"H. Minimum clearance for mounting: 27⅞"W x 19¼"D. 				







Laptop Drawer — Locking, laminate front, metal case				
17⅞"W x 18"D x 3⅜"H	U7WDA	\$ 999	\$ 1016	\$ 1032
<ul style="list-style-type: none"> 16" drawer extension Inside drawer dimensions: 13"W x 16"D x 1⅞"H Minimum clearance for mounting: 17⅞"W x 21"D x 3⅜"H (see illustration) 				

All Extensions models are available in the **Everyday Advantage®** program, see page 10 for details.

How to specify — Select the Model Number from above.	1st Option: Laminate (Laptop drawer front if applicable): See inside front cover for finishes.	2nd Option: Edge (Laptop drawer edge if applicable): See inside front cover for finishes.	3rd Option: Paint (If laptop drawer, list exterior case color here): See inside front cover for finishes. Power Data Module PR6 Silver.	4th Option: Paint (Interior of laptop drawer if applicable): See inside front cover for finishes.	5th Option: Lock (if applicable): STD Standard OMT Omit (Deduct \$18)	6th Option: Lock or Tech Module Color (if applicable): EL Silver (Lock)
<div> <div></div> <div></div> <div></div> <div></div> </div>	<div> <div></div> <div></div> <div></div> <div></div> </div>	<div> <div></div> <div></div> <div></div> <div></div> </div>	<div> <div></div> <div></div> <div></div> <div></div> </div>	<div> <div></div> <div></div> <div></div> <div></div> </div>	<div> <div></div> <div></div> <div></div> <div></div> </div>	<div> <div></div> <div></div> <div></div> <div></div> </div>

Examples: AMRK36 U7WDA.LM11EV.P27.PR6.STDEL

Shippable by small-package carrier.

Articulating Keyboard Supports				
Features	Model AKM5	Model AKM3	Cobra™ Model AKMX	Model AKM1
				
Keyboard Support	Platform style 18¾"W x 11½"D	Platform style 18¾"W x 11½"D	Platform Style 19"Wx11"D	Platform style 25"W x 10½"D
Keyboard Support Material	Phenolic	Phenolic	Phenolic	Polyethylene Made of 90% post-consumer materials and completely recyclable. Free of formaldehydes and carcinogens and emit no VOCs.
Suspension	<ul style="list-style-type: none"> Nylon glides on lubricated slide track Intuitive lift and lock one touch height adjustment Visual height indicator gauge 	<ul style="list-style-type: none"> Nylon glides on lubricated slide track Intuitive lift and lock one touch height adjustment 	Lubricated slide track system: spring assisted	Nylon glides on lubricated slide track system — spring assisted
Platform Rotation	360 degrees	360 degrees	360 degrees	360 degrees
Platform Tilt	+10/-15 degrees	+/- 15 degrees	+10/-20 degrees	+10/-15 degrees
Platform Tilt Adjustment	Soft touch knob for precise tilt adjustment; visual indicator gauge	Release handle for independent tilt adjustment	Convenient tilt wheel assists desired tilt angle	Soft touch knob for simultaneous height and tilt adjustment
Platform Height Adjustment Range	8¾" (1¾" above to 6¾" below)	7" (2½" above to 4½" below) Can position platform to be flush with worksurface for extended work area	12½" (7" above to 5½" below)	6¾" (1¾" above to 5" below)
Platform Height Adjustment	Lift platform to raise, lift slightly and tilt back to lower	Lift platform to raise, lift slightly and tilt back to lower	Lift platform to raise, lift slightly and tilt back to lower	Turn knob to release platform; adjust to desired height and tilt; tighten knob to secure
Palm Rest	Detachable leatherette-covered gel palm rest	Detachable leatherette-covered gel palm rest	Fabric covered gel palm rest	Detachable leatherette-covered gel palm rest
Mouse Pad	Independent tilt and swivel with reversible design; mouse platform clicks in on left or right side, no tools required	Independent tilt and swivel with reversible design; mouse platform clicks in on left or right side, no tools required	Circular, swivel, tilt, LH/RH mounting, mouse catcher, gel rest	In-line to accommodate mouse on same level as keyboard
Microsoft Natural Compatible	No	No	Yes — by removing palm rest	Yes — by removing palm rest
Track Depth	21¾"	21"	23"	17"
Required Mounting Clearance	18¾" W x 21¾"D + ¼" Recess	18¾"W x 21"D + ¼" Recess	19"W x 23"D + ¼" Recess	25"W x 17"D + ¼" Recess
Adjustable Wrist Rest	No	No	Fixed mounting and height	No
Ideal For	<ul style="list-style-type: none"> Straight worksurfaces ADA/HFES compliance Extensive adjustability with mouse in line, mouse over or mouse forward of keyboard 	<ul style="list-style-type: none"> Multiple users Straight worksurfaces Extensive adjustability with mouse in line, mouse over or mouse forward of keyboard 	<ul style="list-style-type: none"> Corner worksurface applications Sit to stand applications 	<ul style="list-style-type: none"> Shallow worksurfaces Stride Beam-Based Benching Corner worksurface (17" or 21") Radius worksurface (42" or 48")
Additional Information	<ul style="list-style-type: none"> Leatherette-covered palm rests are free of formaldehydes and carcinogens. Can be cleaned and sanitized. Entire palmrest can be removed for thorough cleaning of the platform Track can be cut in the field to shorten track depth — may affect ability to fully recess platform 	<ul style="list-style-type: none"> Leatherette-covered palm rests are free of formaldehydes and carcinogens. Can be cleaned and sanitized. Entire palmrest can be removed for thorough cleaning of the platform Installer friendly — ship standard with double-sided tape to assist with installation Track can be cut in the field to shorten track depth — may affect ability to fully recess platform 	<ul style="list-style-type: none"> Track can be cut in the field to shorten track depth — may affect ability to fully recess platform 	<ul style="list-style-type: none"> Leatherette-covered palm rests are free of formaldehydes and carcinogens. Can be cleaned and sanitized. Entire palmrest can be removed for thorough cleaning of the platform Installer friendly — ship standard with double-sided tape to assist with installation Track can be cut in the field to shorten track depth — may affect ability to fully recess platform

AKM5 Keyboard Support w/Switch-n-Click Mousepad (page 116)

- Convenient lift and lock mechanism provides 8 3/8" of height adjustment and offers more precise placement accommodated with visual dial-a-tilt height and tilt gauge.
- +10°/-15° tilt adjustment and 360° rotation provides support of neutral position of shoulders, arms, and wrists while accommodating multiple working postures.
- Slim, low-profile design.
- Pairs with a convertible keyboard platform that can be positioned in-line, over, or forward of keyboard platform — without the need for tools.
- Includes detachable leatherette-covered gel palm rest, nonslip pad, mouse pad, mouse guard, and cord management clips.
- Phenolic material on keyboard platform can be cleaned and sanitized to maintain a bacteria-free environment; articulating arm made of cold-rolled steel is recyclable.
- Recommended for straight-edge worksurfaces.

AKM3 Keyboard Support w/Switch-n-Click Mousepad (page 116)

- Features intuitive lift and lock height and tilt mechanism. Provides 7" of height adjustment.
- Slim, low-profile design that can be positioned flush with the worksurface for an extended workspace.
- +15°/-15° tilt adjustment and 360° rotation provides support of neutral position of shoulders, arms, and wrists while accommodating multiple working postures.
- Pairs with a convertible keyboard platform that can be positioned in-line, over, or forward of keyboard platform — without the need for tools.
- Includes detachable leatherette-covered gel palm rest, nonslip pad, mouse pad, mouse guard, and cord management clips.
- Phenolic material on keyboard platform can be cleaned and sanitized to maintain a bacteria-free environment; articulating arm made of cold-rolled steel is recyclable.
- Recommended for straight-edge worksurfaces.

AKMX Cobra™ Keyboard Support w/Mousepad (page 116)

- Lift and lock intuitive height adjustment.
- Positive and negative tilt for the best ergonomic positioning.
- +10°/-20° tilt adjustment and 360° rotation provides support of neutral position of shoulders, arms, and wrists while accommodating multiple working postures.
- Non-handed mouse tray can be moved from right hand to left hand side.
- Surpasses ANSI/BIFMA standards.
- Black powder-coat finish.

AKM1 Keyboard Support w/Mousepad (page 116)


- Simple, spring-assisted mechanism provides 6 1/4" of height adjustment.
- Features soft-touch knob for simultaneous height and tilt adjustments.
- +10°/-15° tilt adjustment and 360° rotation provides support of neutral position of shoulders, arms, and wrists while accommodating multiple working postures.
- Accommodates keyboard and mouse on the same level
- Includes detachable leatherette-covered gel palm rest, nonslip pad, mouse pad, mouse guard, and cord management clips.
- Keyboard platform made of 90% post-consumer recycled materials and completely recyclable. Free of formaldehydes and carcinogens and emits no VOCs.

Keyboard Spacer Kit (page 116)

- Kit provides ten 2 1/8"H spacers and hardware for mounting keyboard support beneath an external worksurface support channel.


CPU Hammock™ (page 116)






- Features 360° swivel with 1 1/2" ball bearing glide track.
- Load capacity 55 lbs.
- Fits CPUs 5" to 20" in overall height and 3" to 6" in width.
- Height adjustable from 16" to 23" below worksurface.
- No tools required to make adjustments.
- Features a textured, silver paint finish.



Metal Corner Sleeves (page 116)

- 22 1/2"W leading edge x 18"D.
- Corner sleeves connect intersecting worksurfaces to create "corner desk" work areas.
- All corner sleeves have pre-drilled holes to allow attachment of articulating keyboard platforms.



MONITOR ARMS	ZW8 for Tool Tile	ZW8 Single	ZW8 Dual	ZW8 Single-HD	ZW8 Dual-HD
Allsteel Model:	ZW810T	ZW810S	ZW820D	ZW810H	ZW820DH
					
Features:					
Monitor rotation	180°	180°	180°	180°	180°
Monitor Extension	15"	21"	21"	22¼"	26¼"
Monitor retraction	3½"	3½"	3½"	3½"	3½"
Monitor tilt adjustment	+30°/-25°	+30°/-25°	+30°/-25°	+85°/-25°	+35°/-25°
Arm Height adjustment	11¼"	6½" to 19½" (13")	6½" to 19½" (13")	9" to 23" (14")	9" to 23" (14")
Monitor Weight capacity (maximum approved weight)	6½ to 16 lbs.	6½ to 18 lbs.	6½ to 18 lbs. per arm	17½ to 44 lbs.	12 to 38.5 lbs. each
Mounting option	Stride rail mount*	Desk clamp or grommet included	Desk clamp or grommet included	Desk clamp or grommet included	Desk clamp or grommet included
360° lockout feature	No	Yes	Yes	No	No
VESA compatibility	75mm and 100mm	75mm and 100mm	75mm and 100mm	75mm and 100mm	75mm and 100mm
Laptop Tray compatible	Yes	Yes	Yes	No	No
Tool Tile / Stride Bench compatible	Yes	No	No	No	No
Pole height	N/A	N/A	N/A	N/A	N/A
Maximum width per monitor	N/A	N/A	25"***	25"	25"
Worksurface requirements — Desk Clamp	N/A	¾" to 2" thick	¾" to 2" thick	¾" to 2" thick	¾" to 2" thick
Worksurface requirements — Grommet Mount	N/A	¾" to 2" thick; hole diameter ⅝" to 2"	¾" to 2" thick; hole diameter ⅝" to 2"	¾" to 2" thick; hole diameter ⅝" to 2"	¾" to 2" thick; hole diameter ⅝" to 2"
Environmental info	99% Recycled content	99% Recycled content	99% Recycled content	99% Recycled content	99% Recycled content

*ZW810T is NOT approved for Tool Rail Models EASRxx or EAHSRxx that attach to system panel slots or hatches.


**Width of monitor can be extended with ZW8SM sliding mount.

ZW8 Series Monitor Arms (page 117)

- Versatile adjustability with a refined design and effortless, pneumatic fingertip adjustment.
- Multiple points of adjustment, including 360° swivel at two points, 21" extension and 13" of height adjustment, and a 180° lockout feature.
- Monitor tilts +30°/-25°.
- Tension adjustment feature at two locations to accommodate monitor weight and desired tilt tension.
- Maximize use of worksurface with ability to retract to minimal footprint of 3½", making ZW8 ideal for shallow worksurfaces.
- Model includes grommet and worksurface mounting options.
- Integrated cable management.
- Desk clamp mounts to surfaces ⅞" to 2" thick; grommet mount requires hole diameter of ⅝" to 2" wide, and accommodates surfaces up to 2" thick.
- Single arm supports 6½ to 18 lbs.; dual arm offers perfect horizontal alignment, and each arm supports 6½ to 18 lbs.
- ZW8 for tool tile is compatible on Allsteel tool tiles and Stride bench rail includes one dynamic extension limb. Arm extension is 15" from tile/rail, height adjustment 12".
(Not approved for tool rail models EASRxx or EAHSRxx that attach to system panel vertical slots or hitches.)
- ZW810S and ZW820D will fit all depths of Stride double-sided benches. Interference with support beam on 54" bench, desk clamp will not install flush to edge of worksurface, but will allow power access door to close completely.
- Mounting location on Stride single-sided bench and screen-based bench may be impacted by location of connecting brackets and supports.
- VESA 75mm and VESA 100mm compatible.
- Quick release feature simplifies monitor installation and exchanges.

ZW8SM Sliding Mount (page 117)

- Provides 9" of additional horizontal adjustability when attached to ZW810S or ZW820D above.
- Not compatible with Heavy Duty Series.
- 12¼"W x 2¼"H x 5½"D; 2 lbs.




ZW8 Heavy Duty Series (page 117)

- ZW810H heavy duty arm supports 7.6 to 44 lbs. in total weight.
- ZW820DH supports weight capacity 12 to 38.5 lbs. combined (to accommodate 5.5 lbs. weight of crossbar).
- Single arm features 22¼" extension, dual arm extends 26¾".
- Height adjustment range of 9" to 23" (14" total).
- Features 360° rotation at 3 points.
- Integrated cable management.
- Tension adjustment feature at two locations to accommodate monitor weight and desired tilt tension.
- Quick release feature simplifies monitor installation and exchanges.
- Monitor rotates 180° and tilts +85°/-35°.
- Dual arm crossbar length of 41"; monitors can be positioned by sliding along crossbar to accommodate various sizes. Can accommodate up to two 24" diagonal monitors (total outside casing dimension of 38" wide).
- Cannot be installed on 54" Stride double-sided bench due to interference with support beam.
- Mounting location on Stride single-sided bench and screen-based bench may be impacted by location of connecting brackets and supports.

Laptop Tray (page 117)

- Adjustable laptop tray can be used on ZW810S and ZW820D.
- Features adjustable depth of 11¼" to 17¼" to accommodate docking stations along with laptop computer.
- Width 12".
- Designed with ventilation holes for adequate heat dissipation.
- Non-skid protective pads included to prevent laptop from sliding.
- Weight of laptop tray 7 lbs; include when calculating total weight of tray + laptop to comply with weight capacity.










Extensions™

Ergonomics — Keyboard Supports / CPU Holder

For specification information see pages 112-113.

GSA SIN 711-1



Description	Model	List Price
Precision Fit Articulating Keyboard Support with Switch-n-Click Mousepad (Black only)		
18¾"W x 11½"D (Mounting clearance 21¼"D)	AKM5	\$ 553
Convertible Articulating Keyboard Support with Switch-n-Click Mousepad (Black only)		
18¾"W x 11½"D (Mounting clearance 21"D)	AKM3	\$ 482
Cobra™ Keyboard and Mouse Support (Black only)		
19"W x 11"D (Mounting clearance 23"D)	AKMX	\$ 434
Articulating Keyboard Support with Integrated Mousepad (Black only)		
25"W x 10½"D (Mounting clearance 17"D)	AKM1	\$ 317
Keyboard Spacer Kit		
10 – 2¾"H Spacers and Hardware	AKMH	\$ 37
CPU Hammock™ (Silver only)		
Adjustable Height CPU Holder with 360° swivel	ACPU4	\$ 190
Metal Corner Sleeve — for use with Optimize™, Concensys®, Terrace®, and Stride® Systems		
• Fits 1¼" thick square edge detail. (T-Mold worksurfaces) 22½"W leading edge x 18"D.	AWCS	\$ 89

All Extensions models are available in the **Everyday Advantage®** program, see page 10 for details.


How to specify — Select the Model Number from above.	1st Option: Paint for Corner Sleeve:   See inside front cover for finishes.
<div></div> <div></div> <div></div> <div></div> <div></div>	<div></div> <div></div> <div></div> <div></div> <div></div>







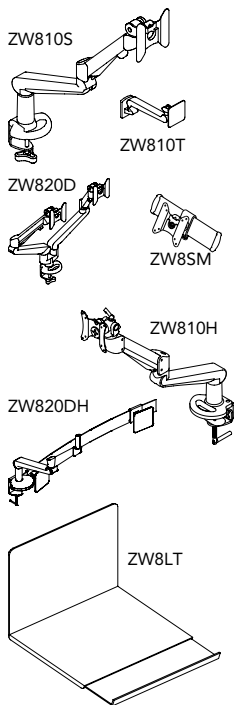

Examples: AKMX AKM1 ACPU4 AWCS.P4J

Shippable by small-package carrier.

For specification information see pages 114-115.

GSA SIN 711-1



Description	Model		List Price
Monitor Arms — ZW8 Series			
Single — Desk Clamp	ZW810S		\$ 380
Single — Mounts to Toolrail or Tool Tile	ZW810T		\$ 380
Dual — Desk Clamp	ZW820D		\$ 651
Conversion Kit — from Single-to-Dual	ZW82KIT		\$ 380
Sliding Mount for Monitor Arm	ZW8SM		\$ 135
Single Monitor — for Heavy Duty Monitor	ZW810H		\$ 577
Dual Monitor — for Heavy Duty Monitors	ZW820DH		\$ 990
Laptop Tray	ZW8LT		\$ 243

All Extensions models are available in the **Everyday Advantage®** program, see page 10 for details.

<p>How to specify —</p> <p>Select the Model Number from above.</p>	<p>1st Option:</p> <p>Color for ZW Series:</p> <p>SVR Silver</p>
---	--

ZW8 | | | | | . S | V | R |


Examples: ZW810S.SVR ZW8LT.SVR

Shippable by small-package carrier.

Allsteel Extensions offers Illumination in four styles — Task Light, Undercabinet LED Light, Wand Light, and Link Light.

Task Light


Recessed task lights conserve space and provide an efficient solution for illuminating the workplace. All models are equipped with electronic ballast for longer bulb life and cooler operating temperature.



Recessed task light models mount under storage cabinets or shelves to provide optimal space utilization. Models are available in two styles and three sizes to correspond with the width of the cabinet or shelf. Task lights with a fused plug are available to meet Chicago electrical code.

Undercabinet LED Light


The Undercabinet LED Light is a low-profile, linear solution for overhead cabinets and shelves and is an ideal solution for painted wood storage. It utilizes energy-efficient LED technology which provides a long life. The Undercabinet LED Light provides the opportunity to mount the fixture where light is needed most.



The Undercabinet LED Light features a metal trough reflector with diffuser lens. The light has a sleek ½" thick profile and provides two options for mounting, either magnetically or with hardware. Undercabinet LED Lights can be daisy-chained.

Optional undercabinet occupancy sensor is available which will automatically turn off the fixture after 30 minutes of no detection and back on immediately as the user re-enters the detection range using Passive Infrared (PIR) sensor technology. Unit features 360° lens with 90° outward detection angle, providing a 36" coverage diameter at 18". Occupancy sensor comes with connector and is required to be connected in the sequence shown below. Connect occupancy sensor to a light, or first light in daisy chain to control all linked lights.

CONNECTION SEQUENCE*



*Cannot deviate from this sequence

Recessed Task Lights (page 120)


- Recessed task lights are black with a 9' long black cord that is attached to the right rear corner of the fixture. (Color does not need to be specified.)
- Bulbs are included.
- RECOMMENDATION: Provide a separate circuit for task lights to ensure proper, long-term operation.
- Includes 4 cord retainer clips.
- Shorter width models can be used on wider overheads, shelves and hutches.
- All models are equipped with electronic ballast for longer bulb life and cooler operating temperature.
- On/Off switch provides individual control of tasklight within the workstation.
- Daisy chain models require a master control model — 10 fixtures maximum.

Undercabinet LED Lights (page 121)

- Low profile energy-efficient LED task light for use with overhead storage cabinets and shelves.
 - 20W power supply for 10W 17" unit (.166 amps).
 - 20W power supply for 20W 31" unit (.166 amps).
 - 60W power supply for daisy-chain starter units (.5 amps). Must order one starter unit for each daisy-chain application.
 - Specify up to 5 additional 17" interconnect units (ALED17UJMP30) to daisy-chain together with 17" daisy-chain starter fixture (ALED17U60).
- Example: Daisy-chain 4–17" undercabinet LED lights:*
- Specify: 1 ALED17U60
 - Specify: 3 ALED17UJMP30 with 10" jumper cord
 - Specify up to 2 additional 31" interconnect units (ALED31UJMP30) with 10" jumper cords to daisy-chain together with 31" tasklight (ALED31U60); or 17" daisy-chain starter fixture (ALED17U60).
 - 3500K color temperature.
 - 131 footcandles at 18" on ALED31U; 76 footcandles at 18" on ALED17U.
 - Magnetic or screw-mount option — attachment hardware included.
 - On 20 watt models, power drive is attached to plug; allow 1½"D space at outlet.
 - On 60 watt models, power drive brick is in center of cord and can be attached to underside of worksurface with velcro mount.
 - Includes 3 cord retainer clips.
 - Meets California Title 24 Energy Efficiency Standards.
 - "Instant On" switch with infinite dimming cycle from 100% to 15% with the last state memory, allowing the user to set their desired level of lighting.
 - Fixture automatically turns off after 10 hours of use to reduce unwanted energy use.
 - Optional occupancy sensor automatically turns off all interlinked fixtures after 30 minutes of no detection and back on immediately when detection is found.

Link™ Light

Link's simple forms, slim profile, and expressive details make a surprising design statement in any workplace. The playful lamp head offers 180-degree movement for natural and precise adjustability. The concentrated array of high-power LEDs delivers a brighter light output than standard fluorescent lights, while operating cooler for consistent, long-lasting, and uniform-quality light. Plus, its efficient design elegantly conserves the amount of materials required, paring them down to their most essential. Engineered for effortless disassembly, Link is 97 percent recyclable.




Link Light (page 121)

- Single- or dual-arm style.
- 3300K color temperature, 7.5 watts.
- Available in two soft-touch colors (Silver and Black).
- Mounting options include a freestanding base, worksurface edge clamp, or tool rail bracket. Each allows for unobstructed lamp rotation.
- Freestanding base is 9½" x 9½".
- Cord length: 9' with detachable power adapter.
- The lamp head forms the handle, offering 180-degree up/down movement.
- Low Profile worksurface clamp allows for minimal clearance conditions but must be installed before worksurface.
- Power is delivered through a conductive aluminum skin, eliminating internal wiring.
- L-shaped base sits in the corner, using minimal workspace.
- Meets California Title 24 Energy Efficiency Standards.
- Link Light is UL, CE, and RoHS compliant.
- Actual length of model LED18U is 19".
- Actual length of model LED36U is 37¼".

Wand™ Task Light

Wand freestanding task light offers a clean, simple design along with powerful LED technology to illuminate the workspace. The swivel base and arm tilt allow users to position the light just where they need it. The 7.7 watt LED light offers efficiency and long life, providing up to 25 years of daily use. The slim, sleek design makes it easy to integrate into any workspace. Wand task light is 97% recyclable. Optional Occupancy Sensor available.




Wand LED Freestanding Task Light (page 121)

- Available in Silver or White. 9'4" cord is Silver.
- Full range dimming from 100% — 10% with last state memory.
- More efficient than original Wand light with brighter and broader range of light.
- Uses 7.7 watts at highest setting and as low as 1 watt at its lowest setting, providing 85 to 12 footcandles of light, respectively (16" above worksurface).
- 7½" round swivel base and 16½"H tilt arm allow versatile positioning of the 13" lampshade.
- Designed for 50,000 hours of life, providing up to 25 years of daily use. Warranty — 5 years (fixture); 3 years (power supply).
- Color Temperature: 3500K. Color Rendering Index (CRI): 80.
- Materials: aluminum arm and lampshade, steel base.
- Weight: 4.4 lbs. 97% recyclable, 76% post-consumer.
- Certifications: UL and CUL. TAA compliant.
- Occupancy sensor available with automatic shut-off after 6 minutes if no motion is detected.

For specification information see pages 118-119.


Open Market / GSA SIN 711-1



GSA SIN 711-1


Description	NEW! Model	List Price
LED Undercabinet Light (white end caps)		
17" Task Light w/20 watt power supply for 24"W or wider overhead	ALED17U <input type="checkbox"/>	\$ 595
17" Task Light w/60 watt power supply for daisy chain	ALED17U60 <input type="checkbox"/>	\$ 649
17" 10 watt Interconnect Task Light w/10" Jumper Cord	ALED17UJMP30 <input type="checkbox"/>	\$ 458
31" Task Light w/20 watt power supply 36"W or wider overhead	ALED31U <input type="checkbox"/>	\$ 890
31" Task Light w/60 watt power supply for daisy chain	ALED31U60 <input type="checkbox"/>	\$ 938
31" 20 watt Interconnect Task Light w/10" Jumper Cord	ALED31UJMP30 <input type="checkbox"/>	\$ 536
Undercabinet Occupancy Sensor 2¼"W + 1"W Connector	ALEDOCC* <input type="checkbox"/>	\$ 363

*Undercabinet Occupancy Sensor works with LED Undercabinet lights shipped after 11/1/2013.



Open Market

Link™ LED Light		
Link LED Lamp, 18" Single Arm	LNKSA <input type="checkbox"/>	\$ 454
Link LED Lamp, 13"/13" Dual Arm	LNKDA <input type="checkbox"/> (shown)	\$ 483
Link Freestanding Base	LNKFS <input type="checkbox"/>	\$ 120
Link Low Profile Worksurface Clamp	LNKCL <input type="checkbox"/>	\$ 74
Link Tool Tile Attachment	LNKPM <input type="checkbox"/>	\$ 74



GSA SIN 711-1

Wand™ LED Task Light (Silver or White)		
Freestanding LED Task Light w/base	WANDFS <input type="checkbox"/>	\$ 290
Freestanding LED Task Light w/base and Occupancy Sensor	WANDFSOC <input type="checkbox"/>	\$ 412

E All Extensions models are available in the **Everyday Advantage®** program, see page 10 for details.

<p>How to specify —</p> <p>Select the Model Number from above.</p>	<p>1st Option:</p> <p>Color (for Link Light):</p> <p>SVR Silver</p> <p>(for Wand LED):</p> <p>SVR Silver WHT White</p>
---	--

Examples: ALED17U LNKDA.SVR WANDFS.WHT

☐ Shippable by small-package carrier.

Appendix

Locking Specifications

GSA Reference Page

Laterals, Pedestals and Storage, Painted Wood Storage

Standard Options

- Random Keying — The factory will assign key(s) arbitrarily using key numbers from chart below.
- Omit Lock Core — The factory will omit lock cores. Removable lock core kits with specific key number must be ordered to facilitate keying alike in the field.

Replacing Lock Cores

- Lock must be in the unlocked position.
- Insert core removal key and pull core straight out.
(Reach units require rotating key 90° clockwise past unlocked position.)
- Insert new core with core removable key, hold core into lock and withdraw core removal key.
- Retain original core for future use.

Vertical Files

Standard Options


- Random Keying — The factory will assign key(s) arbitrarily (see below chart for key numbers).





Key Alike Process

- Order standard product which will be shipped with factory installed locks and random numbered cores.
- Order the appropriate quantity of like numbered cores required for each workstation or keyed area.
- Simply replace the factory installed core with the replacement cores after product has been installed.

	Random Keying	Omit Lock Core	Key Numbers	Lock Core Kit	Master Key
Align™ Laterals	X	X	101E-225E	ALKF23C*	AMKF22
Align New Low Credenzas, Towers, Pedestals (“YP” prefix models)	X	X	101E-225E	ALKF26EL	AMKF22
Align Old Pedestals (for New Pedestals after 11/2015 see above)	X	X	101E-225E	ALKF23C*	AMKF22
Align Old Towers (for New Towers after 2/2016 see above)	X	X	101E-225E	ALKF23C*	AMKF22
Align Metal Front Lockers	X	X	101E-225E	ALKF26EL	AMKF22
Align Laminate Front Lockers	X	X	101E-225E	ALKF23C*	AMKF22
Approach™ Desking and Storage	X	X	101E-225E	ALKF26EL	AMKF22
Center Drawer (CSDC19/25)	X	X	101E-225E	ALKF23C*	AMKF22
Essentials™ Laterals	X	X	101E-225E	ALKF23C	AMKF22
Essentials Overfile Cabinets	X	X	101E-225E	ALKF23C*	AMKF22
Essentials Pedestals	X	X	101E-225E	ALKF23C*	AMKF22
Essentials Personal Tower and Files	X	X	101E-225E	ALKF23C*	AMKF22
Further™ Laminate Storage	X	X	101E-225E	ALKF23C*	AMKF22
Hutches	X	X	101E-225E	ALKF23C*	AMKF22
Involve® Laminate Storage	X	X	101E-225E	ALKF23C*	AMKF22
Overheads (Flipper Door, including RTA)	X	X	101E-225E	ALKF23C*	AMKF22
Overheads (Receding Door)	X	X	101E-225E	ALKF23C*	AMKF22
Stride® Painted Wood Storage	X	X	101E-225E	ALKF23C*	AMKF22
Vertical Files A990/A940	X		101E-225E	ALKF23C*	AMKF22


*ALKF23C is chrome. Optional black core for wood casegoods is ALKF23CE4. Optional matte silver core is ALKF26EL.





Description	Model	List Price
Removable Lock Core Kits		Key Numbers 101E-225E
Brushed Chrome used on metal and painted wood casegoods product produced after 2/3/97; A980, A990, and A940 Series vertical files; Persona™ pedestals produced after 8/22/09; Reach® Storage units produced after 10/5/09; and receding door overheads produced after 8/1/10. Includes one core, two keys, one core removal tool, adapter and instructions		
	ALKF23C 	\$ 18
Black used on veneer casegoods product. Includes one core, two keys, one core removal tool, adapter and instructions. Core matches manufactured lock on metal casegoods but Black core can be used with veneer and laminate product.		
	ALKF23CE4 	\$ 18
Matte Silver used on Approach and Align metal credenzas, new pedestals, and new towers. Includes one core, two keys, one core removal tool, adapter, and instructions.		
	ALKF26EL 	\$ 18
Master Key		
(One key) Available to authorized dealers only on faxed orders. Will open ALKF23C, LKF23C, ALKF23CE4, LKF23CE4, LKF24, LKF25EL, and LKF25E4 locks numbered 101E-225E.		
	AMKF22 	\$ 17


HOW TO ORDER:
Note: Numbers 101E-225E are available. Orders without numbers specified will be keyed at random.
SAMPLE ORDER:

Quantity	Model	Color
6	ALKF23C	X121E
1	AMKF22	X



Brushed Chrome Removable Lock Core Kit*		Key Numbers 101N-225N
Includes one core, two keys, one core removal tool, adapter, and instructions		ALKF23CN 
		\$ 18



Master Key*		
(One key) Available to authorized dealers only on electronic orders. Will open ALKF23CN and LKF23CN locks numbered 101N-225N.		
	AMF22 	\$ 17

*On existing Premium and Asset lateral, use N-Series locks.

 Shippable by small-package carrier.

allsteeloffice.com | 123

Appendix

Locking Specifications — Easy Lock Program

SIN 711-1, 711-3

EASY LOCK PROGRAM

The Allsteel Easy Lock Program simplifies the lock-core ordering process when multiple cores are being specified. The Easy Lock cores can be used with Allsteel storage that currently uses the **ALKF23C** cores (all storage except Receding Door Overheads).

To ensure ease of ordering in different situations the Easy Lock cores can be specified in three different ways — Random, Specified or Sequential.

Random Keying

The Random Keying option is provided for instances where there are multiple orders or phases to a project and the offices need to be keyed alike but the key numbering is not required. With the random keying option key numbers are not specified, however, the core kits will be in sequential order from a random starting point.

Example: *There are 15 offices which each have 5 black locks that need to be keyed alike, but the actual key numbers are not important.*

This order would look like: **LKFE5BLK.X.15**

This specifies that 15 5-core kits are needed in black with random key numbers.

Specified Keying

The Specified Keying option is provided for the instances where there is a specific key number desired for all of the cores ordered.

Example: *There are 10 offices which each have 2 silver locks that need to be keyed-alike with key number 202.*

This order would look like: **LKFE2SLV.X202.10**

This specifies that 10 2-core kits are needed in silver with key number 202.

Sequential Keying

Allsteel Sequential Keying option is provided for the instances when there are multiple orders or phases to a project and it is imperative that key numbers are not duplicated.

Example: *A multiple phase project has 60 total offices — 40 offices in Phase I, and 20 offices in Phase II. The project manager has expressed a need to have keyed-alike offices but doesn't want any of the offices to use the same key numbers.*

The first 40 offices have 4 silver locks each that need to be keyed-alike.

This order would look like: **LKFE4SLV.SEQ/101.40**

This specifies that 40 4-core kits are needed in silver and the starting number is 101.

The second set of 20 offices only have 3 silver locks each that need to be keyed-alike; and it is important which key number starts off the sequence to ensure that no key number is duplicated. It is known that the first key range was key numbers 101-140.

The second order would look like: **LKFE3SLV.SEQ/141.20**

This specifies that 20 3-core kits are needed in silver and key sequence has to start at key number 141.

HOW TO ORDER:

Numbers 101-225 are available. Orders without key numbers specified will be keyed at random.

SAMPLE ORDER FOR EXAMPLES GIVEN:

Model	Key Type	Quantity
LKFE5BLK.	X.	15
LKFE2SLV.	X202.	10
LKFE4SLV.	SEQ/101.	40
LKFE3SLV.	SEQ/141.	20

NOTE: Quantity required is last number in model.option string.

Description	Model / Color	List Price
Easy Lock Lock-Core		
Lock Core Kit — 1 core, 2 keys	LKFE1 _____	\$ 18
Lock Core Kit — 2 cores, 2 keys	LKFE2 _____	\$ 36
Lock Core Kit — 3 cores, 2 keys	LKFE3 _____	\$ 54
Lock Core Kit — 4 cores, 2 keys	LKFE4 _____	\$ 72
Lock Core Kit — 5 cores, 2 keys	LKFE5 _____	\$ 90
Lock Core Kit — 6 cores, 2 keys	LKFE6 _____	\$108
Lock Core Kit — 7 cores, 2 keys	LKFE7 _____	\$126
Lock Core Kit — 8 cores, 2 keys	LKFE8 _____	\$144

Add color suffix to model: **SLV** Silver, **BLK** Black, **MTS** Matte Silver

Note: One core removal key minimum per order. One additional core removal key per 25 lock-cores will be shipped.


Master Key

(One key) Available to authorized dealers only on faxed orders.

AMKF22 \$ 17


How to specify using Easy Lock Program:

Step 1 — Count the number of lock cores and color required in each workstation that need to be keyed alike.




2 overheads with 1 lock-core each = 2
2 pedestals with 1 lock-core each = 2
Total silver lock-cores per station = 4

Step 2 — Count the total number of workstations needing 4 lock-cores.



4 total workstations

Step 3 — Specify model number based on total number of lock-cores in a station and quantity of kits based on number of workstations.




LKFE4SLV.X.4
Lock-Cores per station
Color of Core
Number of workstations

Appendix


16x20 Sample Yardage and Touch-Up Paint

Open Market / GSA SIN 711-1 (as noted)



Model	List Price by Grade					
	1	2	3	4	5	6
Seating Upholstery Sample — 16"H x 20"W						
SYSTG [S]	\$ 113	\$ 126	\$ 134	\$ 141	\$ 154	N/A
	7	8	9	10	Leather 1	Leather 2
	\$ 170	\$ 181	\$ 190	\$ 199	\$ 228	N/A
						N/A
						\$ 220

- Samples have sewn edges, a grommet, and label.



Model	List Price by Grade					
	A	B	C	D	E	F
Systems Fabric Sample — 16"H x 20"W						
SYSFS [S]	\$ 91	\$ 98	\$ 103	\$ 113	N/A	N/A

- Samples have sewn edges, a grommet, and label.

How to specify —
Select the
Model Number
from above.

1st Option:

Fabric
(applicable only to
individual samples):
See inside back cover
for fabrics.

S Y | | | | | | | .

| | | | | | |

Examples: SYSFS.PNL06 SYSTG.SWG904

GSA SIN 711-1

Description	Model	Core List Price	Select List Price
Touch-Up Paint — Brush			
Bottle of Touch-Up Paint with Brush — 0.5 oz.	APTK [S]	\$ 60	\$ 67
Touch-Up Paint — Spray			
Spray Can of Touch-Up Paint — 12 oz.	ARSLCC [S]	\$ 60	\$ 67

Core Paint Colors	Code	Select Paint Colors	Code
Black	P27	Brilliant White.....	PQ8
Brownstone	P7D	Carbon Metallic (<i>Spray Only</i>).....	P4Q
Bungalow	P7C	Champagne Metallic	PR5
Carob	P52	Gunmetal Metallic	PR3
Flint	P02	Platinum Metallic.....	PR2
Fossil	P28	Silver	PR6
Loft	P7B	Tungsten	PR1
Muslin.....	P4J		
Parchment	P93		

How to specify —
Select the
Model Number
from above.

1st Option:

Paint Color:

C S

See available Touch-Up Paint colors listed
above. Some colors are limited to brush
or spray.

A | | | | | | | .

| | | | | | |

Examples: APTK.P02 ARSLCC.P02

[S] Shippable by small-package carrier.

Cross Reference Index

by Model Number

Model	Page	Model	Page	Model	Page	Model	Page	Model	Page	Model	Page
2282-300	97	802182P	24	832454M	56	834723JRM	60	8483024M	57	891330SF	22
2282-400	97	802232P	24	832460A	66	834824A	68	851500	62, 72	891330SG	22
801013	24	802243P	24	832460M	56	834824M	58	851524	72	891336SF	22
801013F	24	802256P	24	832466A	66	834824RA	68	851524M	62	891336SG	22
801032P	24	802269P	24	832466M	56	834824RM	58	851530	72	891342SF	22
801043P	24	802282P	24	832472A	66	834830A	68	851530M	62	891342SG	22
801056P	24	802332P	24	832472M	56	834830M	58	851536	72	891348SF	22
801069P	24	802343P	24	833007A	71	834830RA	68	851536M	62	891348SG	22
801082P	24	802356P	24	833007M	61	834830RM	58	851542	72	891360SF	22
801113	24	802369P	24	833024A	66	83622EL	69	851542M	62	891360SG	22
801113F	24	802382P	24	833024M	56	83622ELM	59	851548	72	893218P	21
801132P	24	802424A	71	833030A	66	83622ER	69	851548M	62	893224P	21
801143P	24	802424M	61	833030M	56	83622ERM	59	851554	72	893230P	21
801156P	24	802532P	25	833036A	66	83623EL	69	851554M	62	893236P	21
801169P	24	802543P	25	833036M	56	83623ELM	59	851560	72	893242P	21
801182P	24	802556P	25	833042A	66	83623ER	69	851560M	62	893248P	21
801213	24	802569P	25	833042M	56	83623ERM	59	851566	72	893260P	21
801213F	24	802582P	25	833048A	66	8362430A	67	851566M	62	894318P	21
801232P	24	802732P	24	833048M	56	8362430M	57	851572	72	894324P	21
801243P	24	802743P	24	833054A	66	8363024A	67	851572M	62	894330P	21
801256P	24	802756P	24	833054M	56	8363024M	57	852424	72	894336P	21
801269P	24	802769P	24	833060A	66	83632EL	69	852424M	62	894342P	21
801282P	24	802782P	24	833060M	56	83632ELM	59	853030	72	894348P	21
801313	24	803030A	71	833066A	66	83632ER	69	853030M	62	894360P	21
801313F	24	803030M	61	833066M	56	83632ERM	59	853636	72	895618P	21
801332P	24	8302430A	67	833072A	66	83633EL	69	853636M	62	895624P	21
801343P	24	8302430M	57	833072M	56	83633ELM	59	854242	72	895630P	21
801356P	24	830299	74	833160A	70	83633ER	69	854242M	62	895636P	21
801369P	24	8303024A	67	833160M	60	83633ERM	59	8542430A	67	895642P	21
801382P	24	8303024M	57	833166A	70	836624LM	61	8542430M	57	895648P	21
801408P	25	831099	73	833166M	60	836624RM	61	8543024A	67	895660P	21
801413	25	831124	73, 74	833172A	70	836630LM	61	8543024M	57	896918P	21
801413F	25	831130	73, 74	833172M	60	836630RM	61	8602430A	67	896924P	21
801432P	25	831212A	66	833272LA	70	8372241LM	60	8602430M	57	896930P	21
801443P	25	831212M	56	833272LM	60	8372241RM	60	8603024A	67	896936P	21
801456P	25	83122EL	69	833272RA	70	8372249LM	60	8603024M	57	896942P	21
801469P	25	83122ELM	59	833272RM	60	8372249RM	60	860536	68	896948P	21
801482P	25	83122ER	69	833624A	68	837224LM	61	860536M	58	896960P	21
801495P	25	83122ERM	59	833624M	58	837224RM	61	860542	68	898218P	21
801513	25	831324	73	833624RA	68	83722EL	69	860542M	58	898224P	21
801513F	25	83132EL	69	833624RM	58	83722ELM	59	860548	68	898230P	21
801532P	25	83132ELM	59	833660A	70	83722ER	69	860548M	58	898236P	21
801543P	25	83132ER	69	833660BTA	67	83722ERM	59	861324	27, 83	898242P	21
801550	74	83132ERM	59	833660BTM	57	8372301LM	60	861330	27, 83	898248P	21
801556P	25	831330	73	833660M	60	8372301RM	60	861336	27, 83	898299P	23
801569P	25	831500L	73	833666A	70	8372309LM	60	861342	27, 83	899900	23
801582P	25	831500R	73	833666BTA	67	8372309RM	60	861348	27, 83	899910	23
801713	24	83222EL	69	833666BTM	57	837230LM	61	861360	27, 83	9120 Program	64, 65
801713F	24	83222ELM	59	833666M	60	837230RM	61	861824	27, 83	946924HP	22
801732P	24	83222ER	69	833672A	70	83723EL	69	861830	27, 83	946930HP	22
801743P	24	83222ERM	59	833672BTA	67	83723ELM	59	861836	27, 83	946936HP	22
801756P	24	83232EL	69	833672BTM	57	83723ER	69	861842	27, 83	946942HP	22
801769P	24	83232ELM	59	833672M	60	83723ERM	59	861848	27, 83	946948HP	22
801782P	24	83232ER	69	834224A	68	83732EL	69	861860	27, 83	A2-8CIR24	34
801832P	25	83232ERM	59	834224M	58	83732ELM	59	8662430A	67	A2-8CIR30	34
801843P	25	832407A	71	834224RA	68	83732ER	69	8662430M	57	A2-8CIR36	34
801856P	25	832407M	61	834224RM	58	83732ERM	59	8663024A	67	A2-8CIR42	34
801869P	25	832424A	66	834230A	68	83733EL	69	8663024M	57	A2-8CIR48	34
801882P	25	832424M	56	834230M	58	83733ELM	59	870072P	36	A2-8CIR60	34
802032P	24	832430A	66	834230RA	68	83733ER	69	870073P	36	A2280-000	97
802043P	24	832430M	56	834230RM	58	83733ERM	59	870074P	36	A870070	36
802056P	24	832436A	66	834662JLM	60	8422430A	67	8722430A	67	A870071	36
802069P	24	832436M	56	834662JRM	60	8422430M	57	8722430M	57	A870300	35
802082P	24	832442A	66	834663JLM	60	8423024A	67	8723024A	67	A870301	35
802132P	24	832442M	56	834663JRM	60	8423024M	57	8723024M	57	A870302	111
802143P	24	832448A	66	834722JLM	60	8482430A	67	891318SF	22	A870824	120
802156P	24	832448M	56	834722JRM	60	8482430M	57	891324SF	22	A870824CH	120
802169P	24	832454A	66	834723JLM	60	8483024A	67	891324SG	22	A870830	120

Cross Reference Index

by Model Number

Model	Page	Model	Page	Model	Page	Model	Page	Model	Page	Model	Page
A870830CH	120	A871502	35	ALED31U60	121	CDMK42	23	CVH26P	26	ELF330NA	100
A870842	120	A871502A	35	ALED31UJMP30	121	CDMK48	23	CVH26PF	26	ELF330NB	100
A870842CH	120	A871503	35	ALEDOCC	121	CDP	36	CVH37P	26	ELF330NI	100
A870860	120	A871503A	35	ALKF23C	123	CDPA29L	74	CVH37PF	26	ELF330NS	100
A870860CH	120	A871504	35	ALKF23CE4	123	CDPA29R	74	CVH39P	26	ELF336NA	100
A8710120	34	A871506	35	ALKF23CN	123	CEP1129F	74	CVH39PF	26	ELF336NB	100
A8710120A	34	A871601	35	ALKF26EL	123	CEP1129P	73, 74	EAAC	110	ELF336NI	100
A8710144	34	A871601A	35	AM387-203A	96	CEP2429F	74	EABE	110	ELF336NS	100
A8710144A	34	A871912	35	AM387-203B	96	CEP2429P	73, 74	EABS	110	ELF342NA	100
A871018	34	A871912A	35	AM387-203I	96	CEP3029F	74	EADH	110	ELF342NB	100
A871018A	34	A871918	35	AM387-203S	96	CEP3029P	73, 74	EAFS	110	ELF342NI	100
A871024	34	A871918A	35	AM387-233A	96	CMT24	36	EAFI	110	ELF342NS	100
A871024A	34	A871972	35	AM387-233B	96	CMT36	36	EAHSR36	109	ELF430NA	100
A871030	34	A871972A	35	AM387-233I	96	COMBKT	82	EAHSR42	109	ELF430NB	100
A871030A	34	A879072	35	AM387-233S	96	CPMB29	74	EAHSR48	109	ELF430NI	100
A871036	34	A879072A	35	AM388-202A	96	CRK29	74	EAHSR60	109	ELF430NS	100
A871036A	34	A879168	35	AM388-202B	96	CS244	75	EAHSR66	109	ELF430PA	100
A871042	34	A879168A	35	AM388-202I	96	CS249	75	EAHSR72	109	ELF430PB	100
A871042A	34	A87P2D1C	111	AM388-202S	96	CS304	75	EAPC	110	ELF430PI	100
A871048	34	A87P2U1C	111	AM388-232A	96	CS309	75	EAPS	110	ELF430PS	100
A871048A	34	A87P2U1D1C	111	AM388-232B	96	CS364	75	EAPT	110	ELF436NA	100
A871060	34	A87P2U1R	111	AM388-232I	96	CS369	75	EASR24	109	ELF436NB	100
A871060A	34	AAPACM2	36, 120	AM388-232S	96	CS424	75	EASR30	109	ELF436NI	100
A871072	34	ACBHEP1229	73	AMF22	123	CS429	75	EASR36	109	ELF436NS	100
A871072A	34	ACBHEP2429	73	AMKF22	123	CS484	75	EASR42	109	ELF436PA	100
A871096	34	ACBHEP3029	73	AMRK36	111	CS489	75	EASR48	109	ELF436PB	100
A871096A	34	ACOMDOME2	111	AMRK42	111	CS544	75	EASR60	109	ELF436PI	100
A8711120	34	ACPU4	116	AMRK48	111	CS549	75	EASS	110	ELF436PS	100
A8711120A	34	AEV920	36	AP1050CST	97	CS604	75	EATS	110	ELF442NA	100
A8711144	34	AF397-203A	96	AP20040AG	97	CS609	75	EBC30	101	ELF442NB	100
A8711144A	34	AF397-203B	96	AP519495	97	CS664	75	EBC336	101	ELF442NI	100
A871124	34	AF397-203I	96	APFB80	97	CS669	75	EBC42	101	ELF442NS	100
A871124A	34	AF397-203S	96	APMC6	110	CS724	75	EBC536	101	ELF442PA	100
A871130	34	AF397-233A	96	APTK	125	CS729	75	EBC60	101	ELF442PB	100
A871130A	34	AF397-233B	96	APWRMOD2UWM	111	CSCMP3614	75	EBC72	101	ELF442PI	100
A871136	34	AF397-233I	96	APWRMOD2WC	111	CSCMP3629	75	EBC82	101	ELF442PS	100
A871136A	34	AF397-233S	96	APWRMOD3UWM	111	CSCMP4214	75	ECF530HA	101	ELF530NA	100
A871142	34	AF398-202A	96	APWRMOD3WC	111	CSCMP4229	75	ECF530HB	101	ELF530NB	100
A871142A	34	AF398-202B	96	ARSLCC	125	CSCMP4814	75	ECF530HL	101	ELF530NI	100
A871148	34	AF398-202I	96	ASC42	104	CSCMP4829	75	ECF530HS	101	ELF530NS	100
A871148A	34	AF398-202S	96	ASCSELF	104	CSCMP6014	75	ECF530NA	101	ELF530PA	100
A871160	34	AF398-232A	96	ASPT-24SC	97	CSCMP6029	75	ECF530NB	101	ELF530PB	100
A871160A	34	AF398-232B	96	ASPT-30SC	97	CSCMP7214	75	ECF530NI	101	ELF530PI	100
A871172	34	AF398-232I	96	ATADF3	37	CSCMP7229	75	ECF530NS	101	ELF530PS	100
A871172A	34	AF398-232S	96	ATADF4	37	CSDC19	76, 111	ECF536HA	101	ELF536NA	100
A871196	34	AFNLFTP-3018	102	ATADJ5	37	CSDC25	76, 111	ECF536HB	101	ELF536NB	100
A871196A	34	AFNLFTP-3036	102	ATADJ6	37	CSF24	83	ECF536HI	101	ELF536NI	100
A871224	34	AFNLFTP-3618	102	AWCS	116	CSF30	83	ECF536HS	101	ELF536NS	100
A871224A	34	AFNLFTP-3636	102	C6942SD	23	CSF36	83	ECF536NA	101	ELF536PA	100
A871230	34	AFNLFTP-4218	102	C8242SD	23	CSF42	83	ECF536NB	101	ELF536PB	100
A871230A	34	AFNLFTP-4236	102	CBK29	74	CSF48	83	ECF536NI	101	ELF536PI	100
A871236	34	AFNLFTP-6018	102	CBPLATE3-36	37	CSF60	83	ECF536NS	101	ELF536PS	100
A871236A	34	AFNLFTP-6036	102	CBPLATE3-42	37	CSL2429F	74	EL96	83	ELF542NA	100
A871242	34	AFNLFTP-6618	102	CBPLATE3-48	37	CSL2429P	73, 74	EL97	83	ELF542NB	100
A871242A	34	AFNLFTP-6636	102	CBPLATE3-60	37	CSL3029F	74	EL98	83	ELF542NI	100
A871248	34	AFNLFTP-7218	102	CCB12L	73	CSL3029P	73, 74	EL99	83	ELF542NS	100
A871248A	34	AFNLFTP-7236	102	CCB12R	73	CUP24	82	ELF230NA	100	ELF542PA	100
A871260	34	AFNLFTP-8418	102	CCB18L	73	CUP30	82	ELF230NB	100	ELF542PB	100
A871260A	34	AFNLFTP-8436	102	CCB18R	73	CUP36	82	ELF230NI	100	ELF542PI	100
A871336	34	AKM1	116	CCB24L	73	CUP42	82	ELF230NS	100	ELF542PS	100
A871336A	34	AKM3	116	CCB24R	73	CUP48	82	ELF236NA	100	ELF830NA	100
A871378	34	AKM5	116	CKK	36	CUP60	82	ELF236NB	100	ELF830NB	100
A871378A	34	AKMH	116	CCWD29L	74	CVH11P	26	ELF236NI	100	ELF830NI	100
A871400	35	AKMX	116	CCWD29R	74	CVH11PF	26	ELF236NS	100	ELF830NS	100
A871400A	35	ALED17U	121	CDG	75	CVH13P	26	ELF242NA	100	ELF836NA	100
A871500	35	ALED17U60	121	CDL29	74	CVH13PF	26	ELF242NB	100	ELF836NB	100
A871501	35	ALED17UJMP30	121	CDMK30	23	CVH24P	26	ELF242NI	100	ELF836NI	100
A871501A	35	ALED31U	121	CDMK36	23	CVH24PF	26	ELF242NS	100	ELF836NS	100

Cross Reference Index

by Model Number

Model	Page	Model	Page	Model	Page	Model	Page	Model	Page
ELF842NA.....	100	ET42424ROBBFA.....	99	OH1536FD.....	82	PH149-232S.....	95	UHTB72	84
ELF842NB.....	100	ET42424ROBBFB.....	99	OH1536RD.....	82	PM119-232A.....	95	WANDFS	121
ELF842NI.....	100	ET42424ROBBFI.....	99	OH1542FD.....	82	PM119-232B.....	95	WANDFSOC.....	121
ELF842NS	100	ET42424ROBBFS.....	99	OH1542RD.....	82	PM119-232I.....	95	YPPA2415SC.....	97
EOF3018	101	ET42424ROFFA.....	99	OH1548FD.....	82	PM119-232S.....	95	YPPA3015SC.....	97
EOF3618	101	ET42424ROFFB.....	99	OH1548RD.....	82	PM187-183A.....	95	ZSSC42.....	56, 66
EOF4218	101	ET42424ROFFI.....	99	OH1560FD.....	82	PM187-183B.....	95	ZSSC48.....	56, 66
EPF23018BBFDA.....	98	ET42424ROFFS.....	99	OH1560RD.....	82	PM187-183I.....	95	ZSSC54.....	56, 66
EPF23018BBFDB.....	98	ET52424LBBFA.....	99	P281520BBFA.....	96	PM187-183S.....	95	ZSSC60.....	56, 66
EPF23018BBFDI.....	98	ET52424LBBFB.....	99	P281520BBFB.....	96	PM187-203A.....	95	ZSSC66.....	56, 66
EPF23018BBFDS	98	ET52424LBBFI.....	99	P281520BBFI.....	96	PM187-203B.....	95	ZSSC72.....	56, 66
EPF23018BDA	98	ET52424LBBFS.....	99	P281520BBFS.....	96	PM187-203I.....	95	ZSSC78.....	56, 66
EPF23018DB	98	ET52424LFFA.....	99	P281520FFA.....	96	PM187-203S.....	95	ZSSC84.....	56, 66
EPF23018DBBFA.....	98	ET52424LFFB.....	99	P281520FFB.....	96	PM187-233A.....	95	ZW810H	117
EPF23018DBBFB.....	98	ET52424LFFI.....	99	P281520FFI.....	96	PM187-233B.....	95	ZW810S.....	117
EPF23018DBBFI.....	98	ET52424LFFS.....	99	P281520FFS.....	96	PM187-233I.....	95	ZW810T	117
EPF23018DBBFS	98	ET52424LOBBFA.....	99	P281523BBFA.....	96	PM187-233S.....	95	ZW820D.....	117
EPF23018DFFB.....	98	ET52424LOBBFB.....	99	P281523BBFB.....	96	PM187-303A.....	95	ZW820DH.....	117
EPF23018DFFI.....	98	ET52424LOBBFI.....	99	P281523BBFI.....	96	PM187-303B.....	95	ZW82KIT	117
EPF23018DFFS.....	98	ET52424LOBBFS.....	99	P281523BBFS.....	96	PM187-303I.....	95	ZW8LT	117
EPF23018DFFB.....	98	ET52424LOFFA.....	99	P281523FFA.....	96	PM187-303S.....	95	ZW8SM.....	117
EPF23018DI	98	ET52424LOFFB.....	99	P281523FFB.....	96	PM188-182A.....	95		
EPF23018DS.....	98	ET52424LOFFI.....	99	P281523FFI.....	96	PM188-182B.....	95		
EPF23018FBBLA	98	ET52424LOFFS.....	99	P281523FFS.....	96	PM188-182I.....	95		
EPF23018FBBLB.....	98	ET52424RBBFA.....	99	PD80.....	97	PM188-182S.....	95		
EPF23018FBBLI.....	98	ET52424RBBFB.....	99	PF197-183A.....	95	PM188-202A.....	95		
EPF23018FBBLS.....	98	ET52424RBBFI.....	99	PF197-183B.....	95	PM188-202B.....	95		
EPF23018FFDA.....	98	ET52424RBBFS.....	99	PF197-183I.....	95	PM188-202I.....	95		
EPF23018FFDB.....	98	ET52424RFFA.....	99	PF197-183S.....	95	PM188-202S.....	95		
EPF23018FFDI.....	98	ET52424RFFB.....	99	PF197-203A.....	95	PM188-232A.....	95		
EPF23018FFDS.....	98	ET52424RFFI.....	99	PF197-203B.....	95	PM188-232B.....	95		
EPF23018SLFA.....	98	ET52424RFFS.....	99	PF197-203I.....	95	PM188-232I.....	95		
EPF23018SLFB.....	98	ET52424ROBBFA.....	99	PF197-203S.....	95	PM188-232S.....	95		
EPF23018SLFI.....	98	ET52424ROBBFB.....	99	PF197-233A.....	95	PM188-302A.....	95		
EPF23018SO.....	98	ET52424ROBBFI.....	99	PF197-233B.....	95	PM188-302B.....	95		
ESC336A	101	ET52424ROBBFS.....	99	PF197-233I.....	95	PM188-302I.....	95		
ESC336B.....	101	ET52424ROFFA.....	99	PF197-233S.....	95	PM188-302S.....	95		
ESC336I.....	101	ET52424ROFFB.....	99	PF197-303A.....	95	PMP41.....	76		
ESC336S.....	101	ET52424ROFFI.....	99	PF197-303B.....	95	PMP47.....	76		
ESC536A.....	101	ET52424ROFFS.....	99	PF197-303I.....	95	PMP53.....	76		
ESC536B.....	101	ETB2W1	99	PF197-303S.....	95	PT17-20TTP.....	97		
ESC536I.....	101	ETKP24WL.....	99	PF198-182A.....	95	PT17-23TTP.....	97		
ESC536S.....	101	ETKP24WR.....	99	PF198-182B.....	95	PT17-29TTP.....	97		
ESH34.....	101	ETKP28H.....	97	PF198-182I.....	95	RD30FB.....	82		
ET42424LBBFA.....	99	GS870924.....	120	PF198-182S.....	95	RD36FB.....	82		
ET42424LBBFB.....	99	GS870924D.....	120	PF198-202A.....	95	RD42FB.....	82		
ET42424LBBFI.....	99	GS870924MCL.....	120	PF198-202B.....	95	RD48FB.....	82		
ET42424LBBFS.....	99	GS870930.....	120	PF198-202I.....	95	RD60FB.....	82		
ET42424LFFA.....	99	GS870930D.....	120	PF198-202S.....	95	SYSFS.....	125		
ET42424LFFB.....	99	GS870930MCL.....	120	PF198-232A.....	95	SYSTG.....	125		
ET42424LFFI.....	99	GS870948.....	120	PF198-232B.....	95	T612FB.....	73		
ET42424LFFS.....	99	GS870948D.....	120	PF198-232I.....	95	T624CB	73		
ET42424LOBBFA.....	99	GS870948MCL.....	120	PF198-232S.....	95	T7DV.....	83, 84		
ET42424LOBBFB.....	99	GS870960.....	120	PF198-302A.....	95	TAWG.....	36		
ET42424LOBBFI.....	99	GS870960D.....	120	PF198-302B.....	95	TWTH.....	82		
ET42424LOBBFS.....	99	GS870960MCL.....	120	PF198-302I.....	95	U7WDA.....	111		
ET42424LOFFA.....	99	L919491	100	PF198-302S.....	95	U9WTC	36		
ET42424LOFFB.....	99	L919492	100	PH149-182A.....	95	UH6536FD.....	84		
ET42424LOFFI.....	99	L919703	100	PH149-182B.....	95	UH6542FD.....	84		
ET42424LOFFS.....	99	LKFE.....	124	PH149-182I.....	95	UH6548FD.....	84		
ET42424RBBFA.....	99	LNKCL.....	121	PH149-182S.....	95	UH6560FD.....	84		
ET42424RBBFB.....	99	LNKDA	121	PH149-202A.....	95	UH6566FD.....	84		
ET42424RBBFI.....	99	LNKFS.....	121	PH149-202B.....	95	UH6572FD.....	84		
ET42424RBBFS.....	99	LNKPM.....	121	PH149-202I.....	95	UHTB36	84		
ET42424RFFA.....	99	LNKSA	121	PH149-202S.....	95	UHTB42	84		
ET42424RFFB.....	99	OH1524FD.....	82	PH149-232A.....	95	UHTB48	84		
ET42424RFFI.....	99	OH1530FD.....	82	PH149-232B.....	95	UHTB60	84		
ET42424RFFS.....	99	OH1530RD.....	82	PH149-232I.....	95	UHTB66	84		

GRADE A

APPOINT PANEL

100% Polyester

Artichoke.....	APN911
Blackberry.....	APN932
Bronze.....	APN922
Carbon.....	APN928
Chai.....	APN912
Cherry.....	APN930
Copper.....	APN918
Dark Pewter.....	APN917
Dune.....	APN915
Espresso.....	APN923
Framboise.....	APN931
Frost.....	APN934
Hummus.....	APN914
Jet.....	APN927
Lawn.....	APN925
Mandarin.....	APN929
Morel.....	APN909
Nimbus.....	APN916
Platinum.....	APN924
Turmeric.....	APN910
Turquoise.....	APN926
Walnut.....	APN913

ELEMENT

100% Polyester

Flint.....	GN965
Indigo.....	GN967
Latte.....	GN973
Millet.....	GN972
Parchment.....	GN953
Sea.....	GN974
Veil.....	GN913
Warm Beige.....	GN955
Wisp.....	GN975

ETCH

100% Polyester

Aquatint.....	ECH901
Crosshatch.....	ECH904
Engrave.....	ECH902
Intaglio.....	ECH906
Lithograph.....	ECH903
Mezzotint.....	ECH907
Woodcut.....	ECH905

EXCHANGE

100% Polyester

Florin.....	EXG908
Franc.....	EXG902
Krona.....	EXG907
Lira.....	EXG906
Riyal.....	EXG901
Rupee.....	EXG903
Tolar.....	EXG904

LANDSCAPE

100% Polyester

Corn silk.....	LN15
Drift.....	LN05
Khaki.....	LN20
Sheen.....	LN10
Slate.....	LN35
Umber.....	LN25
Urban.....	LN30

D Discontinued 12/15/2017

GRADE A – continued

LUCY

100% Recycled Polyester

Aspen.....	LC932
Corn silk.....	LC930
Dusk.....	LC922
Fawn.....	LC933
Graphite.....	LC934
Mist.....	LC920
Neutra.....	LC924
Pewter.....	LC935
Snowdrop.....	LC928

REFLECTIONS

100% Recycled Polyester

Bamboo.....	REF926
Galvanized.....	REF929
Ice.....	REF920
Loggia.....	REF921
Mistral.....	REF928
Moonstone.....	REF923
Pewter.....	REF922
Stainless.....	REF924
Vanilla.....	REF925
Winter.....	REF927

REFUGE

64% Recycled Polyester

36% Polyester

Artesian.....	RFG996
Dune.....	RFG992
Eclipse NEW!	RFG990
Frost.....	RFG993
Glacier NEW!	RFG991
Hemp.....	RFG997
Mineral.....	RFG998
Sandbar.....	RFG995
Tidal.....	RFG994

SARTO ▼

100% Polyester (45% Recycled)

Ash.....	SRT988
Desert.....	SRT933
Earth.....	SRT937
Fog.....	SRT914
Lemongrass.....	SRT949
Meadow.....	SRT925
Mist.....	SRT945
Mushroom.....	SRT976
Oyster.....	SRT918
Reef.....	SRT964
Sesame.....	SRT993
Shale.....	SRT952
Sisal.....	SRT929
Wheat.....	SRT913

TANGO

100% Polyester

Aficionado.....	TG994
Azul.....	TG993
Bongo.....	TG980
Dip.....	TG982
Palma.....	TG991
Pecan.....	TG985
Pistachio.....	TG986
Playa.....	TG933
Salsa.....	TG987
Sol.....	TG992
Tequila.....	TG990

TEMPEST

100% Recycled Polyester

Dragonfly.....	TP930
Frost.....	TP915
Full Stream.....	TP980
Ginger.....	TP925
Gold Rush.....	TP910
Sandstorm.....	TP950
Slate.....	TP945
Tumbleweed.....	TP970
Wind Chill.....	TP940
Zebra.....	TP935

GRADE B

MICA

100% Recycled Polyester

Anthracite.....	MCA911
Breeze.....	MCA918
Bronze.....	MCA913
Buff.....	MCA914
Cremini.....	MCA917
Crystal †.....	MCAWIT
Dew.....	MCA920
Dove.....	MCA912
Fresh.....	MCA916
Mineral.....	MCA915
Nectar.....	MCA919
Shale.....	MCA910

SPIN PANEL

46% Recycled Polyester,

56% Polyester

Alabaster.....	SPIN02
Cavern.....	SPIN03
Cobblestone.....	SPIN04
Ember.....	SPIN06
Flame.....	SPIN07
Heron.....	SPIN13
Oat.....	SPIN01
Ocean.....	SPIN12
Plum.....	SPIN15
Pool.....	SPIN11
Raven.....	SPIN10
Rhubarb.....	SPIN14
Tropic.....	SPIN08
Willow.....	SPIN05

TASANEЕ ♦ **D**

100% Polyester

Birch.....	TSN936
Cinder.....	TSN959
Citrus.....	TSN987
Cumin.....	TSN998
Feather.....	TSN924
Frost.....	TSN951
Pebble.....	TSN948
Silk.....	TSN912
Water.....	TSN963
Willow.....	TSN975

TERRAIN

52% Recycled Polyester,

48% Polyester

Bay.....	TRRN05
Bayou.....	TRRN35
Canyon.....	TRRN30
Cliff.....	TRRN45
Crest.....	TRRN25
Delta.....	TRRN10
Plateau.....	TRRN15
Ridge.....	TRRN20
Valley.....	TRRN40

ALLSTEEL

PARTNERSHIP PROGRAM

Allsteel understands that customers may want to specify panel and seating textiles outside of Allsteel's standard offering. Allsteel's **Partnership Program** consists of on-trend and design-forward patterns that have been tested and approved by Allsteel for use on Allsteel products. A subset of these approved patterns is available on cards in the textile binder, while numerous others are available on our website, allsteeloffice.com.

For memo samples, please contact our partners:

- Carnegie, carnegiefabrics.com
1.800.727.6770
- CF Stinson, cfstinson.com
1.800.841.6279
- Edelman, edelmanleather.com
1.800.886.8339
- HBF Textiles, hbftextiles.com
1.877.494.5727
- Maharam, maharam.com
1.800.645.3943
- Momentum Textiles, memosamples.com
1.800.366.6839
- Ultrafabrics, ultrafabricsllc.com

The intent of the **Partnership Program** is to offer a wide variety of on-trend textiles to meet your varied needs, but since these textiles are not part of our standard offering they may be subject to extended lead times. Because new materials will be introduced regularly, Allsteel reserves the right to change the offering at any time.

GRADE C

PACT † ♦ ♦

Aloe**.....	PAC900
Azure.....	PAC911
Calla**.....	PAC922
Coastal.....	PAC933
Delft.....	PAC944
Dove**.....	PAC955
Dragon.....	PAC966
Eureka.....	PAC977
Fern.....	PAC988
Harbour.....	PAC999
Lily.....	PAC910
Lime.....	PAC921
Midnight.....	PAC932
Nectar.....	PAC943
Patina.....	PAC954
Putty**.....	PAC965
Roast.....	PAC976
Roma.....	PAC987
Rubine.....	PAC998
Sketch.....	PAC909
Tanzanite.....	PAC920
Taupe**.....	PAC931
Toasty**.....	PAC942

** Colors not available on tackboards

SCRIPT

Almond.....	PMOMSCP01
Charcoal.....	PMOMSCP12
Feldspar.....	PMOMSCP23
Flint.....	PMOMSCP34
Nectar.....	PMOMSCP45
Patina.....	PMOMSCP56
Pebble.....	PMOMSCP67
Sand.....	PMOMSCP78
Shadow.....	PMOMSCP89
Slate.....	PMOMSCP00
Sterling.....	PMOMSCP11
Taupe.....	PMOMSCP22
Zinc.....	PMOMSCP33

- ▼ Panel fabric is not available on Further™.
- ♦ Panel fabric is not available on Optimize®.
- † Panel fabric is not available on Concensys.
- ◆ Panel fabric is not available on Involve®.

Multi-use fabrics are seating fabrics that can be used on specific Allsteel panels systems, providing more color and pattern options. The applicable Allsteel multi-use fabrics are noted with System designators in the Seating, Collaboration, and Tables Price List.

Showrooms

Atlanta
Boston
Chicago
Dallas
Los Angeles
New York
San Francisco
Washington, DC

Allsteel®

Allsteel Inc.
Muscatine, Iowa 52761

allsteeloffice.com

Form # A8415.A4 (06/17)

©2017 Allsteel Inc.
All registered trademarks and trademarks
are the property of Allsteel Inc.