


## Cabinet interface device

The Click 600 cabinet interface device provides all the basic functionality you need for your SmartSensor Matrix or Advance installation in one compact case. This module provides power to your sensors, protects your cabinet from surges, and communicates with contact closure devices.



- Can be used in place of Intersection Preassembled Backplates
- Provides DC power for up to 4 sensors
- Protects the sensor from surges
- Forwards detection data collected from the sensors to contact closure devices (not included)
- Has a power switch for each sensor, allowing you to turn sensors on and off individually
- Has multiple configuration connections for communicating from your computer to the connected sensors:
  - USB
  - RJ-11 jacks for RS-485
  - DB-9 connector for RS-232
  - T-bus port
- Can be used on a shelf or affixed to the cabinet wall

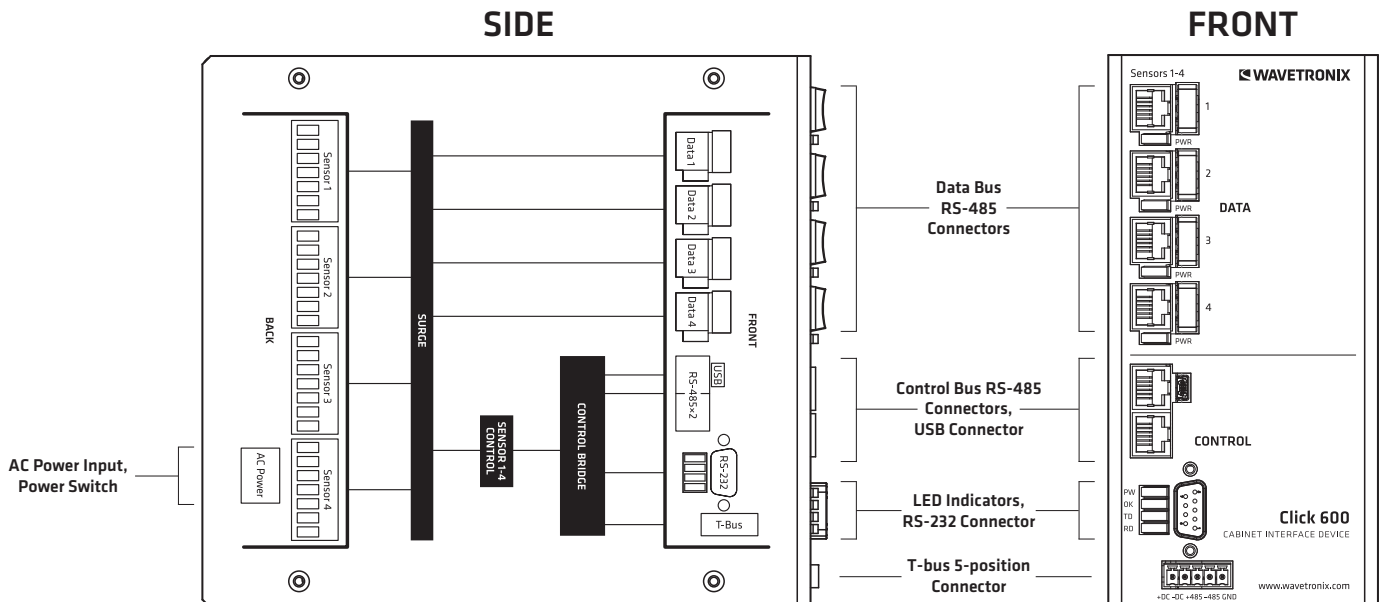

## Technical specifications

### Included components

- Click 600
- AC power cord
- Extra fuse
- Terminal blocks for attaching to cable
- 4 jumper cables

### Physical

- Weight: 3.4 lbs. (1.5 kg)
- Physical dimensions: 7.5 in. × 6.7 in. × 3.3 in. (19 cm x 17 cm x 8.4 cm)
- Ambient operating temp: -29°F to 165°F (-34°C to 74°C)
- Humidity: up to 95% RH

### Mounting

- Shelf-mount
- Optional U-channel mounting bracket accessory package allows mounting on the side of the traffic cabinet

### Power

- Power supply voltage: 90 to 260 VAC
- AC frequency: 50–60 Hz
- Max power: 75 W @ 80°C
- 24 VDC output on sensor connectors

### Connections and communication

- Power
  - AC input: IEC AC input
- Four terminal block connectors on back of device for connecting to sensors
  - Cable terminal points for sensor power and RS-485 communications
  - Matching terminal blocks are included with Click 600
  - Matches terminal blocks used for cable termination with Wavetronix intersection preassembled backplates
- Four RJ-11 jacks on faceplate of device for connecting to contact closure devices
  - Communicate via RS-485
  - Jacks make up physical interface of data bus on device and are for sending detection data from sensors on to contact closure devices such as rack cards (which are not included)
  - Communicate with rack cards via jumper cables (included)
- Four communication ports on faceplate make up physical interface of control bus and are for connecting to the sensors to configure them
  - DB-9 port for communicating via RS-232
  - Two RJ-11 jacks for communicating via RS-485
  - USB mini-B connector

## Ordering information

Click 600  
**102-0402**

### Accessories

**102-0423** – U-Channel Mounting Bracket Accessory Pack

### Contact us

801.734.7200  
sales@wavetronix.com  
www.wavetronix.com

- T-bus port for connecting to a T-bus; allows Click 600 to send DC power and RS-485 communications to other devices connected to a T-bus

### Other features

- Four multicolored LEDs with activity indicating functions:
  - Red LED (PW) illuminates when device has power
  - Blue LED (OK) extinguishes if device has been disabled by surges
  - Green LED (TD) illuminates when data is transmitted on the control bus
  - Yellow LED (RD) illuminates when data is received on the control bus
- Each data bus RJ-11 jack on the faceplate corresponds to one sensor and has the following features:
  - Switch for turning the power to that sensor on and off
  - LED for indicating when that sensor has power
- Switch for turning power on and off to entire device

### NEMA TS2-2003 testing

- Complies with the applicable standards stated in the NEMA TS2-2003 Standard
- Test results available for each of the following tests:
  - Shock pulses of 10 g, 11 ms half sine wave
  - Vibration of 0.5 Grms up to 30 Hz
  - 300 V positive/negative pulses applied at one pulse per second at minimum and maximum AC supply voltage
  - Stored at -49°F (-45°C) for 24 hours
  - Stored at 185°F (85°C) for 24 hours
  - Operation at -29.2°F (-34°C) and 89 VAC
  - Operation at -29.2°F (-34°C) and 135 VAC
  - Operation at 165.2°F (74°C) and 135 VAC

- Operation at 165.2°F (74°C) and 89 VAC

**FCC testing**

- FCC-compliant

**Testing**

- Passes manufacturer's test before shipping

**Surge immunity**

- Surge immunity sensor ports: IEC/EN 61000-4-5 level 4
- Surge immunity AC input: IEC/EN 61000-4-5 level 3

**Extended support**

- Extended support options are available from Wavetronix; contact a Wavetronix representative for more information

**Warranty**

- Two-year warranty against material and workmanship defect

## Bid specifications

**1.0 General.** This item shall govern the purchase and installation of a cabinet interface device (CID) equivalent to the Wavetronix Click 600. Test results and other documentation demonstrating performance and capabilities shall be provided.

**2.0 Product description.** The CID shall be a module that provides power and surge protection and that communicates with contact closure devices. The CID shall be shipped with the AC power cord, jumper cables and terminal blocks necessary for wiring it, as well as with an extra fuse.

**3.0 Physical.** The CID shall not exceed 3.4 lbs. (1.5 kg) in weight.

The CID shall not exceed 7.5 in. × 6.7 in. × 3.3 in. (19 cm × 17 cm × 8.4 cm) in its physical dimensions.

The CID shall operate in the temperature range of -29°F to 165°F (-34°C to 74°C) and in humidity up to 95% RH.

**4.0 Mounting.** The CID shall be shelf-mounted. It shall be capable of being mounted on the side of the traffic cabinet with the aid of U-channel mounting brackets.

**5.0 Power.** The power supply voltage of the CID shall be 90 to 260 VAC. Its AC frequency shall be 50–60 Hz and the maximum power shall be 75 W at 80°C.

The CID's sensor connectors shall output 24 VDC.

**6.0 Connections and communication.** The CID shall include the following connections for power and communication:

**6.1 Power.** The CID shall have an IEC AC input.

**6.2 Terminal block connectors.** The CID shall have four terminal block connectors for connecting to sensors. These connectors shall be for terminating cables that carry power and RS-485 communications to and from the sensors.

**6.3 Data RJ-11 connectors.** The CID shall have four RJ-11 jacks for sending detection data from sensors to contact closure devices such as rack cards via jumper cables. This data shall be sent via RS-485. These jacks shall make up the physical interface of a dedicated data bus.

**6.4 Control connectors.** The CID shall have four other communication ports. These ports shall make up the physical interface of a dedicated control bus and shall allow users to connect to the sensors and configure them.

- DB-9 port for communicating via RS-232
- Two RJ-11 jacks for communicating via RS-485
- USB mini-B connector
- T-bus port for connecting to a T-bus

**7.0 Other features.** The CID shall have the following other features:

**7.1 LEDs.** The CID shall have four multicolored LEDs with activity-indicating functions:

- An LED that indicates when the device has power
- An LED that indicates if the device has been disabled by surges
- An LED that indicates when data is being transmitted on the control bus
- An LED that indicates when data is being received on the control bus.

**7.2 Data RJ-11 jack features.** The four jacks that make up the physical interface of the data bus (and that each correspond to one sensor) shall have a switch for turning their corresponding sensor off and an LED that indicates when that sensor has power.

**7.3 Power switch.** The CID shall have a switch for turning power off for the entire device.

**8.0 NEMA TS2-2003 testing.** The CID shall comply with the applicable standards stated in the NEMA TS2-2003 Standard. Test results shall be made available for each of the following tests:

- Shock pulses of 10g, 11 ms half sine wave
- Vibration of 0.5 Grms up to 30 Hz
- 300 V positive/negative pulses applied at one pulse per second at minimum and maximum AC supply voltage
- Cold temperature storage at -49°F (-45°C) for 24 hours
- High temperature storage at 185°F (85°C) for 24 hours
- Low temp, low DC supply voltage at -29.2°F (-34°C) and 89 VAC
- Low temp, high DC supply voltage at -29.2°F (-34°C) and 135 VAC
- High temp, high DC supply voltage at 165.2°F (74°C) and 135 VAC
- High temp, low DC supply voltage at 165.2°F (74°C) and 89 VAC

**9.0 FCC testing.** The CID shall be FCC-compliant.

**10.0 Testing.** Before shipping, each CID shall have passed a manufacturer's test.

**11.0 Surge immunity.** The sensor ports of the CID shall conform to IEC/EN 61000-4-5 level 4 standards; the AC input of the CID shall conform to IEC/EN 61000-4-5 level 3 standards.

**12.0 Extended support.** Extended support options shall be available. Contact the manufacturer's representative for more information.

**13.0 Warranty.** The CID shall be warranted to be free from material and workmanship defects for a period of two years from date of shipment.