








Our machines are stamped Gravely. But they belong to you – the ones out there earning a living and building a reputation.

The designs we create and the decisions we make are driven by your day-to-day demands. Our mission and motivation is to get inside the mind of the professional. We hear what you need and then work to make it a reality.

We're powered to put professionals in a position to succeed. To work smarter, faster, longer and more comfortably. And to perform at a level you can be proud of.

At the end of the day we're all working toward the same thing – the satisfaction of a job well done.

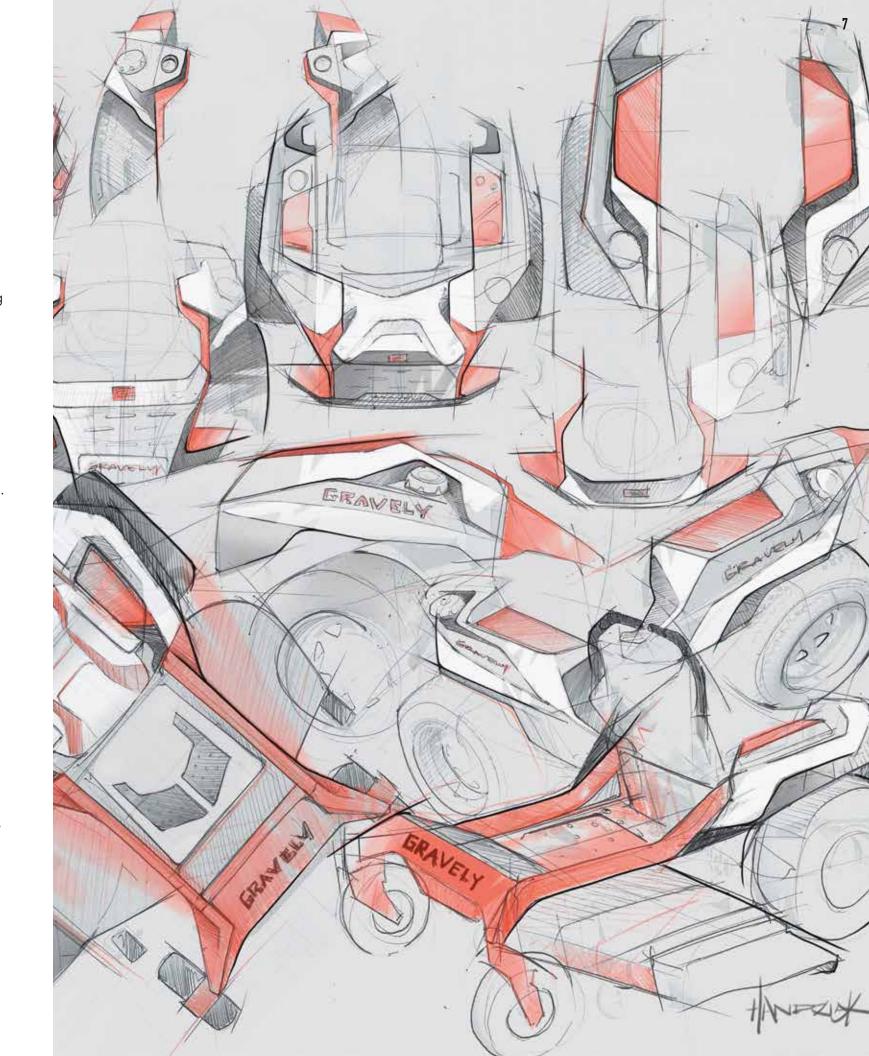



THE BEST IN THE BUSINESS.

No nonsense, no sick days and refusing to take "no" for an answer.

It's no surprise that the most proud and passionate professionals drive Gravely.

Because this family is wired the same way.

Our work and wit and will have separated us from the rest. But we're not so different from the people that sit in our seats.



First to the job, last to leave. Not calling it quits until the job's done right. Always staying a step ahead. It's how we've powered through the past century. It's how we've earned your trust.


IT'S HOW WE WORK.

IT'S HOW WE THINK.

IT'S HOW WE SUCCEED.

IT'S HOW WE'RE DRIVEN.



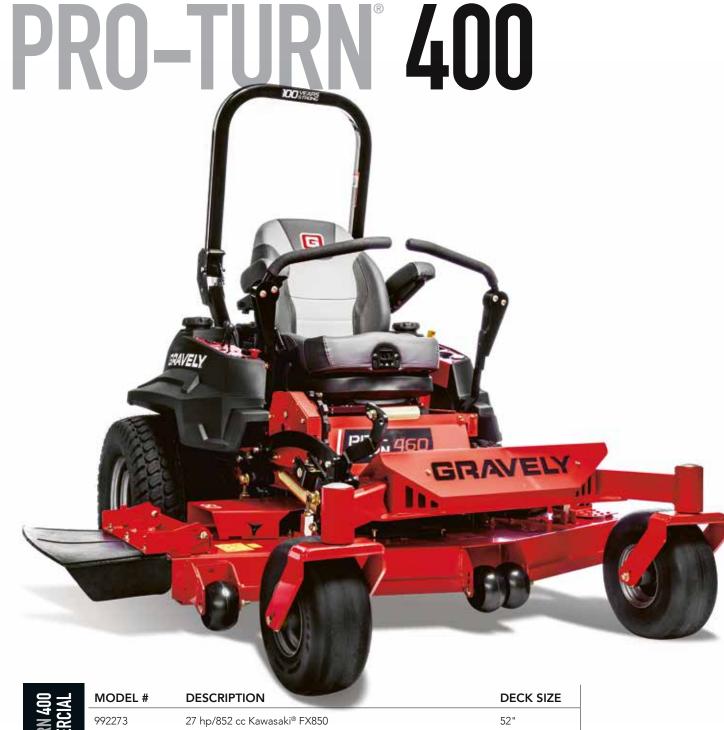

MODEL #	DESCRIPTION	DECK SIZE
992273	27 hp/852 cc Kawasaki® FX850	52"
992282 992289*	29 hp/824 cc Yamaha EFI MXV775	52"
992274	31 hp/999 cc Kawasaki® FX921V	60"
992275	35 hp/999 cc Kawasaki® FX1000V	60"
992278	33 hp/824 cc Kohler® EFI ECV880	60"
992283 992288*	33 hp/824 cc Yamaha® EFI MXV825	60"
992280**	29 hp/824 cc Kohler® LP PSV860 EFI**	60"
992284 992290*	33 hp/824 cc Yamaha® EFI MXV825	72"
992276	35 hp/999 cc Kawasaki® FX1000V	72"
-		



THE BEST IN THE BUSINESS.

If you're looking to run with the best, look no further than the Pro-Turn 400. With a stronger frame, smarter controls and a smoother ride, the PT 400 continues to set the pace, leading the way with unparalleled professional performance.



X-FACTOR® II DECK

The 7-gauge, all-steel welded X-Factor® II Deck is fabricated from top to bottom, providing industrial-strength peace of mind that's reinforced with an exclusive limited lifetime warranty.



AIR-RIDE SUSPENSION SEAT

The industry's first air-ride suspension system is enhanced with seat isolators to absorb large vertical impacts and designed with an oversized, pillow-top, extra high-back seat for all-day comfort.



CBT SYSTEM

Our exclusive Constant Belt Tension System (CBT) ensures that belt tension is constant, keeping the blade tip speed and cutting results consistent.



EZ-LIFT™ DECK SYSTEM

The EZ-Lift Deck System takes 25% less effort to raise and lower the deck. Plus, 19 cutting positions with .25-inch increments help eliminate overhung loads.



STEEL CHASSIS

A heavy-duty, 1.5-inch x 3-inch steel, singular tubular frame is fabricated with four engine frame isolation points to reduce cockpit vibration by 45% while lessening operator fatigue.



RADIAL REAR TIRES

Radial rear tires come standard, delivering automotive-style performance, industryleading handling and hill holding, while being gentler to the turf.















—	
2 ₹	
2 22	
芳뿌	
ΤĒ	
무요.	
<u> </u>	

MODEL #	DESCRIPTION	DECK SIZE
992268	27 hp/852 cc Kawasaki® FX850V	52"
992271	29 hp/824 cc Kohler® EFI ECV860	52"
992284 992291*	29 hp/824 cc Yamaha® EFI MXV775	52"
992267	25 hp/747 cc Kohler® ZT740	60"
992269	27 hp/852 cc Kawasaki® FX850V	60"
992272	29 hp/824 cc Kohler® EFI ECV860	60"
992281 992292*	29 hp/824 cc Yamaha® EFI MXV775	60"
992270	31 hp/999 cc Kawasaki® FX921V	72"
992295 992283*	33 hp/824 cc Yamaha® EFI MXV825	72"



HARDWORKING HERITAGE.

Pro-Turn 200 mowers feature the same DNA, determination and leading-edge design as the Pro-Turn 400. So it's built to carry the legacy and live up to the standard of signature Gravely commercial-grade performance.



X-FACTOR® II DECK

The 7-gauge, all-steel welded X-Factor® II Deck is fabricated from top to bottom, providing industrial-strength peace of mind that's reinforced with an exclusive limited lifetime warranty.



DECK LEVEL DESIGNA simple four-point adj

A simple four-point adjustment uses half the parts and zero deck hanging welds, making it quick and easy to adjust and maintain superior cutting performance.



SE

SEATING SYSTEM

A full-suspension seat provides added lateral stability and improved durability with vibration control and a 4-inch seat slide for all-day comfort.



CH

STEEL CHASSIS

A heavy-duty, 1.5-inch x 3-inch steel, singular tubular frame is fabricated with four engine frame isolation points to reduce cockpit vibration by 45% and lessen operator fatigue.






CBT SYSTEM

Our exclusive Constant Belt Tension System (CBT) ensures that belt tension is constant, keeping the blade tip speed and cutting results consistent.



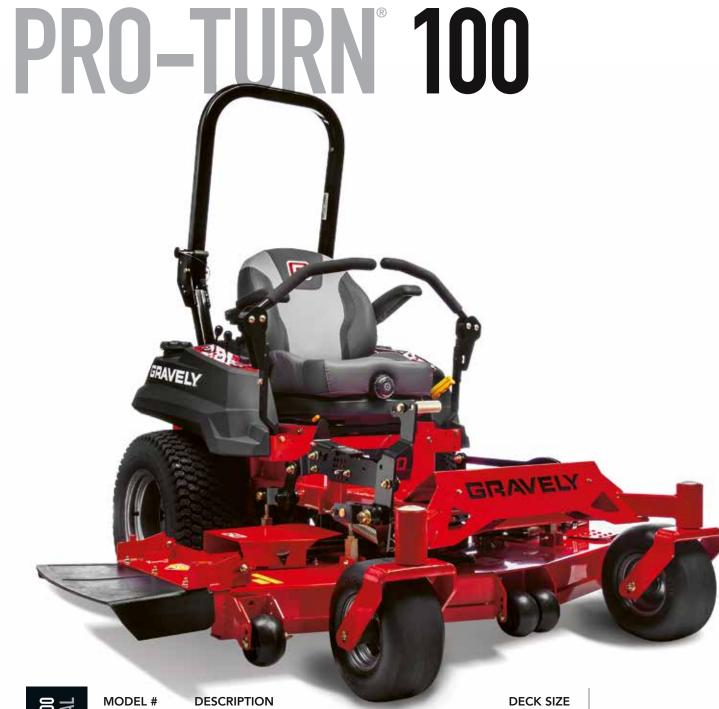

PRO-TURN 100 COMMERCIAL

MODEL #	DESCRIPTION	DECK SIZE
991128 991137*	22 hp/726 cc Kawasaki® FX691V	48"
991131	23 hp/747 cc Kohler® ZT730	48"
991134	23 hp/725 cc Kohler® ZT725 EFI	48"
991129 991138*	22 hp/726 cc Kawasaki® FX691V	52"
991132	23 hp/747 cc Kohler® ZT730	52"
991135	25 hp/725 cc Kohler® ZT725 EFI	52"
991130 911139*	23.5 hp/726 cc Kawasaki® FX730V	60"
991133	25 hp/747 cc Kohler® ZT740	60"
991136	25 hp/747 cc Kohler® ZT740 EFI	60"



NEVER SETTLE.

Uncompromised Gravely performance with a slightly smaller price tag. We've taken 100 years of experience and turned the Pro-Turn 100 into the toughest, most versatile and powerful commercial value on the market.

DE

X-FACTOR® II DECK

The 7-gauge, all-steel welded X-Factor® II Deck is fabricated from top to bottom, providing industrial-strength peace of mind that's reinforced with an exclusive limited lifetime warranty.



CBI

CBT SYSTEM

Our exclusive Constant Belt Tension System (CBT) ensures that belt tension is constant, keeping the blade tip speed and cutting results consistent.



F

ROPS

Foldable ROPS comes standard to provide additional protection for the operator.



DE.

INSIGHTFUL DESIGN

An updated design creates improves the operator experience, providing a clear line of sight to the deck cutting edge.



SE/

SEATING SYSTEM

The high-back suspension seats provides improved lateral stability with added vibration control and a 4-inch seat slide for all-day comfort.





1	_
☎	A
	$\overline{}$
F.	7
_	皿
$oldsymbol{\Xi}$	$\overline{}$
뜻	₹
	$\boldsymbol{\Xi}$

MODEL #	DESCRIPTION	DECK SIZE
991215 991221*	23 hp/726 cc Kawasaki® FS691V	48"
991218	23 hp/747 cc Kohler® ZT730	48"
991216 991222*	23 hp/726 cc Kawasaki® FS691V	52"
991219	23 hp/747 cc Kohler® ZT730	52"
991217 991223*	24 hp/726 cc Kawasaki® FS730V	60"
991220	25 hp/747 cc Kohler® ZT740	60"



BRAINS, BRAWN AND BRILLIANT DESIGN.

We've always worked to surpass even the highest commercial demands. The Gravely Pro-Turn remains the undisputed benchmark, using industry insight to provide professionals with the commercial performance required to get the job done right.



X-FACTOR® II DECK

The 10-gauge, all-steel welded X-Factor® II Deck is fabricated from top to bottom, providing industrial-strength peace of mind that's reinforced with an exclusive limited lifetime warranty.





SEATING SYSTEM

The high-back suspension seats features adjustable arm rests, seat isolators and large diameter steering arms to reduce fatigue and provide all-day comfort.





DECK LIFT SYSTEM

Effortless foot-operated system offers 17 cutting positions in .25-inch increments and eliminates over-hung loads.





DISCHARGE CHUTE

The flip-up side discharge chute is designed to avoid potential damage to the surrounding environment.





CBT SYSTEM

Our exclusive Constant Belt Tension System (CBT) ensures that belt tension is constant, keeping the blade tip speed and cutting results consistent.



COMPACT-PRO®



SIZE IT UP.

Designed to fit your budget and exceed your demands, the Compact Pro® measures up to the best. Loaded with creature comforts, these versatile zero-turns are built with uncompromised strength, and born with a dedication to commercial-grade quality that doesn't quit.



SMALLER FOOTPRINT

The compact commercial tubular frame gives you more flexibility to fit on trailers, maneuver through tight spaces and pass through 36inch gates.





QUICK-RELEASE DECK LIFT

Easily change from one cut height to the next with nine cutting positions in .5 inch increments ranging from 1 inch to 5 inches.





KAWASAKI® FX ENGINE

Powered by a Kawasaki FX Engine that touts a heavy-duty canister air cleaner to optimize performance in all conditions and extend engine life.





HYDROSTATIC HYDRO GEAR

The Hydrostatic Hydro Gear 10cc pump provides smooth response and operation with the ability to go 8 to 9 miles per hour in effortless fashion.





MODEL#	DESCRIPTION	DECK SIZE
991088	15.5 hp/603 cc Kawasaki® FX	34"
991105*	15.5 hp/603 cc Kawasaki® FX	34"



PEACE OF MIND

2-year overall warranty, a three-year spindle warranty and a lifetime warranty on your deck and frame.

TOOLS OF THE TRADE.

Bottom line, Gravely commercial baggers and accessories are good for business. With increased comfort, improved efficiency and enhanced performance, Gravely can help outfit your fleet to get the job done right.

1 COMMERCIAL BAGGER SYSTEMS

Fabric cover doesn't crack like the plastic counterparts and provides improved airflow and venting. Plus, the top opens fully and is held open by gas cylinders. Choose from a 3-bucket, 12-bushel capacity or 2-bucket, 8-bushel capacity which includes: Blower, bag frame, tube and weight kit. (Mounting kit sold separately)

- 3-bucket bagger fits the Pro-Turn(R) 400 and 200 models with X-Factor(R) II deck.
- 2-bucket bagger fits the Pro-Turn 100 and Pro-Turn models with X-Factor(R) II deck.

2 MULCH KIT

Separate cutting chambers for each blade produce smaller clippings for a professionally manicured appearance.

3 SUNSHADE

Cut all day in comfort while staying cool and protected from the sun.

4 POWERED DECK LIFT

This powered lift kit makes cutting height adjustments smooth and simple.

5 OPERATOR-CONTROLLED DISCHARGE CHUTE

Control the dispersion of grass clippings directly from the operator position to keep clippings out of unwanted areas.

6 HITCH KIT

Add a hitch kit to enjoy unmatched versatility with a variety of tow-behind options.


7 CHROME WHEEL COVERS

Add custom style to your profile with chrome wheel covers, available for both front and rear wheels in 6-, 10- and 12-inch sizes.







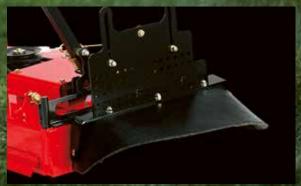







PRO-STANCE®



MODEL #	DESCRIPTION	DECK SIZE
994131 994139*	18.5 hp/603 cc Kawasaki® FS 600 V-Twin	36"
994132	22 hp/726 cc Kawasaki® FX 691 V-Twin	48"
994133	22 hp/726 cc Kawasaki® FX 691 V-Twin	52"
994142	22 hp/747 cc Kohler® EFI EZT725	52"
994134	23 hp/747 cc Kohler® ZT730	52"
994136*	24 hp/747 cc Kohler® PCV740 EFI LP	52"
994140*	24 hp/747 cc Kohler® PCV740 EFI LP	60"
994137	23.5 hp/726 cc Kawasaki® FX 730 V-Twin	60"
994143	25 hp/747 cc Kohler® EFI EZT740	60"



TAKE A STAND.

Here's further proof that Gravely stands for efficiency, quality and durability. Built to stand up to whatever crosses your path, the Pro-Stance features an easily adjustable deck and convertible suspension platform to keep you in control all day long.



HEIGHT ADJUSTMENT

An effortless foot pedal feature offers improved leverage for smaller operators who normally struggle with traditional hand lever lifts.



TIRES

The Pro-Stance is booted with industry leading, 13-inch, semi-pneumatic tires up front and radial, Superior Traction Technology (STT) tires in the rear.



FLIP-UP SUSPENSION PLATFORM

The flip-up suspension platform provides allday standing comfort and can easily transition from a stand-on to a walk-behind.



DECK LEVEL SYSTEM

A simple 4-point adjustment uses half the parts and zero deck hanging welds, making it quick and easy to adjust and maintain superior cutting performance.





TECH ADVANCED 3400 TRANSMISSION

The 3400 integrated transmission boasts an industry leading 1.125-inch axle for heavy loads.





LIFETIME WARRANTY

We provide industrial-strength peace of mind and stand behind our X-Factor II® Deck with an exclusive lifetime warranty.



PRO-WALK®



MODEL #	DESCRIPTION HYDRO DRIVE	DECK SIZE
988156	14.5 hp/603 cc Kawasaki® FS481V	36"
988172	18.5 hp/603 cc Kawasaki® FS600V	48"
988173	18.5 hp/603 cc Kawasaki® FS600V	52"
988174	23 hp/726 cc Kawasaki® FS691V	60"
988181**	22 hp/747 cc Kohler® PCV680 EFI LP	48"
MODEL #	DESCRIPTION GEAR DRIVE	DECK SIZE
988150	14.5 hp/603 cc Kawasaki® FS481V	32"
988151		
	14.5 hp/603 cc Kawasaki® FS481V	36"
988152	14.5 hp/603 cc Kawasaki® FS481V 14.5 hp/603 cc Kawasaki® FS481V	36" 48"

LIMITED WARRANTY

COMMERCIAL

LIFEIME

PEAR HOUR LIMIT

DECK SHELL
AND FRAME

See you professional dealer for complete
warranty details.

WALK THE WALK.

Completely redesigned and tough enough to take on any terrain, our Pro-Walk commercial lawn mowers are built for minimal maintenance and maximum performance, so powering across the landscape feels like a walk in the park.



Intuitive steering shortens the learning curve and provides precise handling while ergonomic controls position the operator in a neutral position to lessen fatigue.



HANDLEBARS

Adjustable handlebars provide four height positions to comfortably accommodate operators of any size.



WIDE WHEEL BASE

Cut with confidence and control with a wide wheel base that provides superior hillside stability.



HEIGHT OF CUT

A single-point height of cut allows you to control your cutting performance in .25-inch increments.



X-FACTOR® II DECK

The 7-gauge, all-steel welded X-Factor®
II Deck is fabricated from top to bottom, providing industrial-strength peace of mind that's reinforced with an exclusive limited lifetime warranty.



DISCHARGE CHUTE

The flip-up side discharge chute is designed to avoid potential damage to the surrounding environment.



** LP available on previous models. Features will vary.

* = CARB Compliant

PRO-QXT



PRO- QXT Commercial		
	PRO- OXT	COMMERCIAL

MODEL #	DESCRIPTION
985910*	14HP/404 cc Subaru® — PRO-QXT TRACTOR
MODEL #	ATTACHMENTS
885911	POWER BRUSH Attachment 44"
885910	DOZER BLADE Attachment 48"
885912	SNOW BLOWER Attachment 32"
885913	BRUSH MOWER Attachment 32"
885914	FINISH MOWER Attachment 36"
885915	FINISH MOWER Attachment 48"



TWO-WHEELS. COUNTLESS CAPABILITIES.

This two-wheeled, walk-behind workhorse is the single solution for clearing the way with convenience and commercial capability. From a power brush and brush mower to a snow head and scraper blade, the Pro-QXT Tractor features a quick attach system provides unmatched versatility to get the job done right season after season.

RAPID™ CONTROL SYSTEM

Variable speed control allows operators

to quickly change direction, increasing productivity. The combination of the Rapid Control System and intuitive power steering results in smooth, seamless and easy operation.



QUICK-ATTACH SYSTEM

The Pro-QXT Tractor provides a quick, singleperson attachment changes are with minimal effort, allowing an operator to easily transition between attachments.



ALL-SEASON ENGINE

12v electric start Subaru® engine with recoil assist provides optimal performance in any weather condition.



HYDROSTATIC DRIVE

Intuitive power steering provides effortless operation in all applications, increasing efficiency and productivity.



ERGONOMIC CONTROLS

Fully adjustable controls allow for comfortable operation by a variety of operators with the ability to fold handles down for condensed storage and transport.



ALL SEASON DESIGN

Designed to deliver a seamless transition through all seasons without the need to alter the tractor between extreme conditions.



POWER BRUSH



A CLEAR ADVANTAGE.

Gravely multi-functional power brushes are engineered with the versatility you need to clean clear to the surface in any season. Whether snow, slush, salt, sand, gravel, grime our general debris, choose from a 28-inch or 36- inch model and put the finishing touches on a job well done.

ALL-SEASON SUBARU® ENGINE

The Subaru engine puts the "power" in our Power Brush, delivering optimized performance in any weather.



TRACTION CONTROL

Automatic traction control provides enhanced maneuverability and effortless steering.



BRUSH ANGLE

With 40-degree brush head rotation and operator controlled pivot lock, dirt and debris have no place to hide.



TOOLLESS HEIGHT ADJUSTMENT SYSTEM

Step your game up (or down) to accommodate varying surfaces and minimize brush wear.




POWER BRUSH

MODEL #	DESCRIPTION	HOUSING SIZE
921026*	6 hp/169 cc Subaru® , EX17	28"
926063*	9 hp/265 cc Subaru® , EX27	36"
926064*	9.5 hp/287 cc Subaru®, EX30 HYDROSTATIC TRANSMISSION, 12V KEY START	36"

ATLAS JSV®







PLAYTIME IS OVER.

With class-leading towing capacity and a heavy-duty suspension, the Atlas JSV doesn't play around when it comes to getting the job done right. Born to haul, tow, work or dump, it's also built to seat 3 or 6 passengers comfortably.

CAPACITY

With a class-leading bed capacity of 1250 lbs. and a 1900-lb. total payload, the Atlas JSV holds its own, and then some.



SUSPENSION

Our heavy-duty de Dion suspension minimizes sag, to maintain full ground clearance even with cargo, tongue weight and towing maxed out.



TOWING

The Atlas JSV can tow a ton. Literally. Hitch up a full 2000 lbs. of trailer and cargo and you'll get more done in less time.



POWER

Choose the 3-cylinder, 1028cc Kohler Diesel engine to maximize torque and traction. Or run with an electronically fuel-injected DOHC gasoline engine that's been tested at 13,000 ft. and temperatures from -25° to 110°F.




ALL-STEEL JOBBOX

The Atlas JSV's fabricated all-steel cargo bed won't buckle or bend. Dump cargo with the touch of a button and haul a fully loaded pallet, thanks to a generous 18 cubic feet of cargo space.









A HARD-

WORKING

NETWORK.

Gravely enthusiasts put the "work" back into the social network. While we were around decades before the world wide web, we've always strived to stay connected with hard working professionals who were proud of a job well done.

SO ONCE YOU'VE FINALLY CALLED IT A DAY, KICK OFF YOUR BOOTS AND JOIN THE CONVERSATION.

















ZT HD



-	Ø
	L
7	Z
	Н
	S
	ш
	2

MODEL #	ENGINE	DECK SIZE
991160 991180*	21.5 hp/726 cc Kawasaki® FR V-Twin	44"
991162 991182*	23 hp/726 cc Kawasaki® FR V-Twin	48"
991152	25 hp/725 cc Kohler® 7000 Series HD V-Twin w/ Smart Choke™	48"
991164 991184*	23 hp/726 cc Kawasaki® FR V-Twin	52"
991154	25 hp/725 cc Kohler® 7000 Series HD V-Twin w/ Smart Choke™	52"
991166 991186*	24 hp/726 cc Kawasaki® FR V-Twin	60"
991156	26 hp/747 cc Kohler® 7000 Series HD V-Twin w/ Smart Choke™	60"





A PROFESSIONAL DEBUT.

The best residential riding mower ever. It's a bold statement. And there's only one mower strong enough to back it up.—The all-new ZT HD from Gravely. It's redesigned from the ground up and relentlessly tested to elevate the standard of style, comfort, speed and precision. Bring it home to make your lawn look professional while all other mowers look like amateurs.



STYLE

Redesigned, aggressive stance not only looks bold, but also provides better control, a smoother ride and improved stability.



CUT S Offers

CUT SELECTION

Offers 15 cutting positions ranging from 1.5 inches to 5 inches, to make your lawn look its best.



DE

10-GAUGE FABRICATED DECK

The 5.5-inch deep deck delivers superior airflow to handle challenging mowing conditions and includes a reinforced leading edge.



FR.

FULLY WELDED TUBULAR FRAME

This fully welded tubular frame is a professional-grade backbone tough enough get the job done in your backyard.



IK

GEARED FOR GREATNESS. HYDRO-GEAR® ZT-3100 TRANSMISSIONS

Switch gears from ordinary performance with a commercial-grade, high-efficiency design that delivers responsive control and increased torque.



SE

CLAIM YOUR THRONE. SEATING COMFORT

This plush, high-back seat with cut and sewn armrests ensures upgraded comfort for longer mowing sessions.



5በ

FINISH THE JOB.

Gravely accessories aren't just

extra parts. They're essential to

setting yourself apart from every

other house in the neighborhood.

Complement your cutting

experience and finish the job like

a professional with more speed,

efficiency, comfort and convenience.



Whether the 2-bag, powered or non-powered bagger, Gravely bagger systems offer heavy-duty cloth bags and superior grass/air velocity to keep your lawn look clean and professionally manicured.

2 MULCH KIT

Advanced design delivers exceptional airflow, pushing clippings back into the lawn for a professionally manicured appearance.

3 SUNSHADE

Cut all day in comfort while staying cool and protected from the sun.

4 FLUIDS

Maintain next level performance by leveling off with Gravely certified liquids to keep your key components running right.

5 OPERATOR-CONTROLLED DISCHARGE CHUTE

Control the dispersion of grass clippings directly from the operator position to keep clippings out of unwanted areas.

6 APPAREL

There are going to be a lot of eyes on your lawn. Make sure you look good and feel with a full line of high-performance gear from Gravely.

7 CHROME WHEEL COVERS

Add custom style to your profile with chrome wheel covers, available for both front and rear wheels in 6-, 10- and 12-inch sizes.















	PRODUCT NAME	Pro-Turn 452	Pro-Turn 452	Pro-Turn 460	Pro-Turn 460	Pro-Turn 460	Pro-Turn 460	Pro-Turn 472	Pro-Turn 472	Pro-Turn 460
	MODEL NUMBER	992273	992282 992289*	992274	992275	992278	992283 992288*	992276	992284 992290*	992280**
	ENGINE	Kawasaki® FX850 Air-cooled, Heavy-Duty Air Cleaner	Yamaha® EFI MXV775 Air-cooled, Heavy-Duty Air Cleaner	Kawasaki® FX921V Air-cooled, Heavy-Duty Air Cleaner	Kawasaki® FX1000V Air-cooled, Heavy-Duty Air Cleaner	Kohler® EFI ECV880 Air-cooled, Heavy-Duty Air Cleaner	Yamaha® EFI MXV825 Air-cooled, Heavy-Duty Air Cleaner	Kawasaki® FX1000V Air-cooled, Heavy-Duty Air Cleaner	Yamaha® EFI MXV825 Air-cooled, Heavy-Duty Air Cleaner	Kohler® LP PCV860 EFI Air-cooled, Heavy-Duty A Cleaner
	HORSEPOWER	27	29	31	35	33	33	35	33	29
	DISPLACEMENT (CC)	852	824	999	999	824	824	999	824	824
	DRIVE SYSTEM	Hydro-Gear® ZT- 5400 Integrated pump/motor	Hydro-Gear® 5400 Integra pump/motor							
	FUEL CAPACITY - GALLONS (LITERS)	13.4 (50.7)	13.4 (50.7)	13.4(50.7)	13.4 (50.7)	13.4 (50.7)	13.4 (50.7)	13.4 (50.7)	13.4 (50.7)	Twin 33.5# tanks (tanks r included)
DECK	GROUND SPEED (APPROX. MPH) (FORWARD/REVERSE)	13 mph/6 mph	13 mph/6 mp							
JECK	DECK MATERIAL	7 ga steel with .25 inch spindle reinforcement	7 ga steel wit .25 inch spind reinforcemen							
	DECK CONSTRUCTION	Welded								
	NUMBER OF SPINDLES	3	3	3	3	3	3	3	3	3
	BLADE TIP SPEED (FPM)	18,348	18,348	18,633	18,633	18,633	18,633	18,229	18,229	18,633
	SPINDLE HOUSING MATERIAL	Cast Iron								
	SPINDLE BEARINGS	Ball Bearing								
	DECK ENGAGEMENT	Ogura® GT3.5 Electric Clutch	Ogura® GT3. Electric Clutc							
	CUTTING WIDTH	52"	52"	60"	60"	60"	60"	72"	72"	60"
	CUTTING HEIGHTS	1.0-5.5"	1.0-5.5"	1.0-5.5"	1.0-5.5"	1.0-5.5"	1.0-5.5"	1.0-5.5"	1.0-5.5"	1.0-5.5"
	CUTTING POSITIONS	19	19	19	19	19	19	19	19	19
WHEELS	FRONT AXLE	Fixed with greaseable caster fork tubes	Fixed with greaseable ca fork tubes							
	FRONT	Smooth 15 x 6-6 Semi Pneumatic	Smooth 15 x Semi Pneum							
	REAR	Radial Turf 23x10-12	Radial Turf 24x12-12							
EATURES										
	SEAT	High Back w/ Full Air Ride Suspension and seat isolators	High Back w Full Air Ride Suspension a seat isolators							
	HOOD	N/A								
	FOLDABLE ROPS	Standard								
//ACHINE										
	WEIGHT (LBS) W/O FUEL	1326	1332	1358	1358	1360	1356	1453	1445	1579
	LENGTH (INCHES) WIDTH (INCHES)	80"	80"	80"	80"	80"	80"	80"	80"	80"
	(W/O CHUTE)	55.5"	55.5"	63"	63"	63"	63"	75"	75"	63"
	WIDTH W/ CHUTE	67.75"	67.75"	75.25"	75.25"	75.25"	75.25"	87.25"	87.25"	75.25"
	HEIGHT W/ ROPS EXT/ DOWN (INCHES)	70/47.75"	70/47.75"	70/47.75″	70/47.75"	70/47.75″	70/47.75″	70/47.75″	70/47.75″	70/47.75"
VARRANTY	UNIT	3 Year Limited Commercial	3 Year Limite Commercial							
	DECK SHELL & FRAME	Limited Lifetime	Limited Lifet							
	SPINDLES	3 Year Limited	3 Year Limite							

	PRODUCT NAME	Pro-Turn 252	Pro-Turn 252	Pro-Turn 252	Pro-Turn 260	Pro-Turn 260	Pro-Turn 260	Pro-Turn 260	Pro-Turn 272	Pro-Turn 272
	MODEL NUMBER	992268	992271	992284 992291*	992267	992269	992272	992281 992292*	992270	992295 992283*
	ENGINE	Kawasaki® FX850V Air-cooled Vertical twin Heavy-Duty Air Cleaner	Kohler® EFI ECV860 Air-cooled Vertical twin Heavy-Duty Air Cleaner	Yamaha® EFI MXV775 Air-cooled Vertical twin Heavy-Duty Air Cleaner	Kohler® ZT740 Air-cooled Vertical twin Heavy-Duty Air Cleaner	Kawasaki® FX850V Air-cooled Vertical twin Heavy-Duty Air Cleaner	Kohler® EFI ECV860 Air-cooled Vertical twin Heavy-Duty Air Cleaner	Yamaha® EFI MXV775 Air-cooled Vertical twin Heavy-Duty Air Cleaner	Kawasaki® FX921V Air-cooled Vertical twin Heavy-Duty Air Cleaner	
	HORSEPOWER	27	29	29	25	27	29	29	31	33
	DISPLACEMENT (cc)	852	824	824	747	852	824	824	999	824
	DRIVE SYSTEM	Hydro-Gear® ZT- 5400 Integrated pump/motor	Hydro-Gear® ZT-5400 Integrated pump/motor	Hydro-Gear® ZT-5400 Integrated pump/motor	Hydro-Gear® ZT-5400 Integrated pump/motor	Hydro-Gear® ZT-5400 Integrated pump/motor	Hydro-Gear® ZT-5400 Integrated pump/motor	Hydro-Gear® ZT-5400 Integrated pump/motor	Hydro-Gear® ZT- 5400 Integrated pump/motor	Hydro-Gear® ZT-5400 Integr pump/motor
	FUEL CAPACITY - Gallons (LITERS)	13.4 (50.7)	13.4 (50.7)	13.4 (50.7)	13.4 (50.7)	13.4 (50.7)	13.4 (50.7)	13.4 (50.7)	13.4 (50.7)	13.4 (50.7)
D =0/	GROUND SPEED (APPROX. Mph) (Forward/Reverse)	13 mph/6 mph	13 mph/6 mph	13 mph/6 mph	13 mph/6 mph	13 mph/6 mph	13 mph/6 mph	13 mph/6 mph	13 mph/6 mph	13 mph/6 mp
DECK	DECK MATERIAL	7 ga steel with .25 inch spindle reinforcement	7 ga steel with .25 inch spindle reinforcement	7 ga steel with .25 inch spindle reinforcement	7 ga steel with .25 inch spindle reinforcement	7 ga steel with .25 inch spindle reinforcement	7 ga steel with .25 inch spindle reinforcement	7 ga steel with .25 inch spindle reinforcement	7 ga steel with .25 inch spindle reinforcement	7 ga steel with .25 inch spindl reinforcement
	DECK CONSTRUCTION	Welded	Welded	Welded	Welded	Welded	Welded	Welded	Welded	Welded
	NUMBER OF SPINDLES	3	3	3	3	3	3	3	3	3
	BLADE TIP SPEED (FPM)	18,348	18,348	18,348	18,633	18,633	18,633	18,633	18,229	18,633
	SPINDLE HOUSING MATERIAL	Cast Iron	Cast Iron	Cast Iron	Cast Iron	Cast Iron	Cast Iron	Cast Iron	Cast Iron	Cast Iron
	SPINDLE BEARINGS	Ball Bearing	Ball Bearing	Ball Bearing	Ball Bearing	Ball Bearing	Ball Bearing	Ball Bearing	Ball Bearing	Ball Bearing
	DECK ENGAGEMENT	Ogura® GT3.5 Electric Clutch	Ogura® GT3.5 Electric Clutch	Ogura® GT3.5 Electric Clutch	Ogura® GT3.5 Electric Clutch	Ogura® GT3.5 Electric Clutch	Ogura® GT3.5 Electric Clutch	Ogura® GT3.5 Electric Clutch	Ogura® GT3.5 Electric Clutch	Ogura® GT3.5 Electric Clutch
	CUTTING WIDTH	52"	52"	52"	60"	60"	60"	60"	72"	72"
	CUTTING HEIGHTS	1.5-5.5"	1.5-5.5"	1.5-5.5"	1.5-5.5"	1.5-5.5"	1.5-5.5"	1.5-5.5"	1.5-5.5"	1.5-5.5"
	CUTTING POSITIONS	17	17	17	17	17	17	17	17	17
WHEELS										
	FRONT AXLE	Fixed. Greaseable caster fork tubes	Fixed. Greaseable caster fork tubes	Fixed. Greaseable caster fork tubes	Fixed. Greaseable caster fork tubes	Fixed. Greaseable caster fork tubes	Fixed. Greaseable caster fork tubes	Fixed. Greaseable caster fork tubes	Fixed. Greaseable caster fork tubes	Fixed. Greases caster fork tub
	FRONT	Smooth 15 x 6-6	Smooth 15 x 6-6	Smooth 15 x 6-6	Smooth 15 x 6-6	Smooth 15 x 6-6	Smooth 15 x 6-6	Smooth 15 x 6-6	Smooth 15 x 6-6	Smooth 15 x 6
FEATURES	REAR	Turf 23 x 10.5-12	Turf 23 x 10.5-12	Turf 23 x 10.5-12	Turf 24 x 12-12	Turf 24 x 12-12	Turf 24 x 12-12	Turf 24 x 12-12	Turf 24 x 12-12	Turf 24 x 12-1
PEATORES	SEAT	High Back w/ Full Suspension	High Back w/ Full Suspension	High Back w/ Full Suspension	High Back w/ Full Suspension	High Back w/ Full Suspension	High Back w/ Full Suspension	High Back w/ Full Suspension	High Back w/ Full Suspension	High Back w/ Suspension
	HOOD	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	FOLDABLE ROPS	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard
MACHINE										
	WEIGHT (lbs) W/O Fuel	1302	1166	1166	1322	1336	1232	1228	1410	1414
	LENGTH (inches)	80"	80"	80"	80"	80"	80"	80"	82"	80"
	WIDTH (inches) W/O Chute	55.5"	55.5"	55.5"	63	63	63	63	75	75
	WIDTH W/ CHUTE	67.5"	67.5"	67.5"	75"	75"	75"	75"	87"	87"
AVA DD A NITV	HEIGHT W/ ROPS EXT/DOWN (inches)	70/47.75	70/47.75	70/47.75	70/47.75	70/47.75	70/47.75	70/47.75	70/47.75	70/47.75
WARRANTY	UNIT	2 Year Limited Commercial	2 Year Limited Commercial	2 Year Limited Commercial	2 Year Limited Commercial	2 Year Limited Commercial	2 Year Limited Commercial	2 Year Limited Commercial	2 Year Limited Commercial	2 Year Limited Commercial
	DECK SHELL & FRAME	Limited Lifetime Deck Shell & Frame	Limited Lifetime Deck Shell & Frame	Limited Lifetime Deck Shell & Frame	Limited Lifetime Deck Shell & Frame	Limited Lifetime Deck Shell & Frame	Limited Lifetime Deck Shell & Frame	Limited Lifetime Deck Shell & Frame	Limited Lifetime Deck Shell & Frame	Limited Lifetin Deck Shell & Frame
					3 Year Limited	3 Year Limited	3 Year Limited	3 Year Limited	3 Year Limited	3 Year Limited

PRO-TURN 100

	0									
	PRODUCT NAME	Pro-Turn 148	Pro-Turn 148	Pro-Turn 148	Pro-Turn 152	Pro-Turn 152	Pro-Turn 152	Pro-Turn 160	Pro-Turn 160	Pro-Turn 160
	MODEL NUMBER	991128 991137*	991131	991134	991129 991138*	991132	991135	991130 911139*	991133	991136
	ENGINE	Kawasaki® FX691V Air-cooled, V-twin Heavy-Duty Air Cleaner	Kohler® ZT730 Air-cooled, V-twin Heavy-Duty Air Cleaner	Kohler® ZT725 EFI Air-cooled, V-twin Heavy-Duty Air Cleaner	Kawasaki® FX691V Air-cooled, V-twin Heavy-Duty Air Cleaner	Kohler® ZT730 Air-cooled, V-twin Heavy-Duty Air Cleaner	Kohler® ZT725 EFI Air-cooled, V-twin Heavy-Duty Air Cleaner	Kawasaki® FX730V Air-cooled, V-twin Heavy-Duty Air Cleaner	Kohler® ZT740 Air-cooled, V-twin Heavy-Duty Air Cleaner	Kohler® ZT740 EFI Air-cooled, V-twin Heavy-Duty Air Cleaner
	HORSEPOWER	22	23	22	22	23	22	23.5	25	25
	DISPLACEMENT (CC)	726	747	725	726	747	725	726	747	747
	DRIVE SYSTEM	Hydro-Gear® ZT- 3400 Integrated pump/motor	Hydro-Gear® ZT- 3400 Integrated pump/motor	Hydro-Gear® ZT- 3400 Integrated pump/motor	Hydro-Gear® ZT- 3400 Integrated pump/motor	Hydro-Gear® ZT- 3400 Integrated pump/motor	Hydro-Gear® ZT- 3400 Integrated pump/motor	Hydro-Gear® ZT- 3400 Integrated pump/motor	Hydro-Gear® ZT- 3400 Integrated pump/motor	Hydro-Gear® ZT- 3400 Integrated pump/motor
	FUEL CAPACITY - GALLONS (LITERS)	10 (37.8)	10 (37.8)	10 (37.8)	10 (37.8)	10 (37.8)	10 (37.8)	10 (37.8)	10 (37.8)	10 (37.8)
	GROUND SPEED (APPROX. MPH) (FORWARD/REVERSE)	10 mph/5 mph	10 mph/5 mph	10 mph/5 mph	10 mph/5 mph	10 mph/5 mph	10 mph/5 mph	10 mph/5 mph	10 mph/5 mph	10 mph/5 mph
DECK	STARTER	Electric	Electric	Electric	Electric	Electric	Electric	Electric	Electric	Electric
	DECK MATERIAL	7 ga steel w/ 1/4" spindle reinforcement	7 ga steel w/ 1/4" spindle reinforcement	7 ga steel w/ 1/4" spindle reinforcement	7 ga steel w/ 1/4" spindle reinforcement	7 ga steel w/ 1/4" spindle reinforcement	7 ga steel w/ 1/4" spindle reinforcement	7 ga steel w/ 1/4" spindle reinforcement	7 ga steel w/ 1/4" spindle reinforcement	7 ga steel w/ 1/4" spindle reinforcement
	DECK CONSTRUCTION	Fabricated	Fabricated	Fabricated	Fabricated	Fabricated	Fabricated	Fabricated	Fabricated	Fabricated
	NUMBER OF SPINDLES	3	3	3	3	3	3	3	3	3
	BLADE TIP SPEED (FPM)	18,000	18,000	18,000	18,000	18,000	18,000	18,000	18,000	18,000
	SPINDLE HOUSING MATERIAL	Cast Iron	Cast Iron	Cast Iron	Cast Iron	Cast Iron	Cast Iron	Cast Iron	Cast Iron	Cast Iron
	SPINDLE SHAFT	Steel	Steel	Steel	Steel	Steel	Steel	Steel	Steel	Steel
	SPINDLE BEARINGS	Ball Bearing	Ball Bearing	Ball Bearing	Ball Bearing	Ball Bearing	Ball Bearing	Ball Bearing	Ball Bearing	Ball Bearing
	DECK DRIVE	Belt	Belt	Belt	Belt	Belt	Belt	Belt	Belt	Belt
	DECK ENGAGEMENT	Ogura® GT2.5 Electric Clutch	Ogura® GT2.5 Electric Clutch	Ogura® GT2.5 Electric Clutch	Ogura® GT2.5 Electric Clutch	Ogura® GT2.5 Electric Clutch	Ogura® GT2.5 Electric Clutch	Ogura® GT2.5 Electric Clutch	Ogura® GT2.5 Electric Clutch	Ogura® GT2.5 Electric Clutch
	DECK LIFT SYSTEM	Adj Foot Operated	Adj Foot Operated	Adj Foot Operated	Adj Foot Operated	Adj Foot Operated	Adj Foot Operated	Adj Foot Operated	Adj Foot Operated	Adj Foot Operated
	CUTTING WIDTH	48"	48"	48"	52"	52"	52"	60"	60"	60"
	CULTURE LIFECULTS				1 5" 5 5"	1.5"-5.5"	1.5"-5.5"	1.5"-5.5"	1.5"-5.5"	1.5"-5.5"
	CUTTING HEIGHTS	1.5"-5.5"	1.5"-5.5"	1.5"-5.5"	1.5"-5.5"	1.3 -3.3	1.3 -3.3	1.3 -3.3	1.3 -3.3	,
	CUTTING POSITIONS	1.5"-5.5"	1.5"-5.5"	1.5"-5.5"	17	17	17	17	17	17
WHEELS										17
WHEELS			17							
WHEELS	CUTTING POSITIONS	Fixed. Greaseable caster fork tubes Smooth	Fixed. Greaseable caster fork tubes Smooth	Fixed. Greaseable caster fork tubes Smooth	Fixed. Greaseable caster fork tubes Smooth	Fixed. Greaseable caster fork tubes Smooth	Fixed. Greaseable caster fork tubes Smooth	Fixed. Greaseable caster fork tubes Smooth	Fixed. Greaseable caster fork tubes Smooth	Fixed. Greaseable caster fork tubes
WHEELS	CUTTING POSITIONS FRONT AXLE FRONT	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6
WHEELS	CUTTING POSITIONS FRONT AXLE	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6	Fixed. Greaseable caster fork tubes Smooth	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6
	CUTTING POSITIONS FRONT AXLE FRONT	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12
	CUTTING POSITIONS FRONT AXLE FRONT REAR	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full
	FRONT AXLE FRONT REAR SEAT	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full Suspension	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full Suspension	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full Suspension	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full Suspension	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full Suspension	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full Suspension	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full Suspension	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full Suspension	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full Suspension
	FRONT AXLE FRONT REAR SEAT HOOD HOUR METER W/ MAINTENANCE	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full Suspension N/A	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full Suspension N/A	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full Suspension N/A	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full Suspension N/A	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/Full Suspension N/A	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full Suspension N/A	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full Suspension N/A	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full Suspension N/A	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full Suspension N/A
	FRONT AXLE FRONT REAR SEAT HOOD HOUR METER W/ MAINTENANCE REMINDER SUSPENSION SEAT W/	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full Suspension N/A Standard	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full Suspension N/A Standard	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full Suspension N/A Standard	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full Suspension N/A Standard	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full Suspension N/A Standard	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full Suspension N/A Standard	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full Suspension N/A Standard	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full Suspension N/A Standard	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full Suspension N/A Standard
FEATURES	FRONT AXLE FRONT REAR SEAT HOOD HOUR METER W/ MAINTENANCE REMINDER SUSPENSION SEAT W/ PAD ARMREST	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full Suspension N/A Standard Standard	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full Suspension N/A Standard Standard	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full Suspension N/A Standard Standard	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full Suspension N/A Standard Standard	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full Suspension N/A Standard	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full Suspension N/A Standard Standard	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full Suspension N/A Standard Standard	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full Suspension N/A Standard Standard	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full Suspension N/A Standard
FEATURES	FRONT AXLE FRONT REAR SEAT HOOD HOUR METER W/ MAINTENANCE REMINDER SUSPENSION SEAT W/ PAD ARMREST FOLDABLE ROPS	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full Suspension N/A Standard Standard Standard	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full Suspension N/A Standard Standard	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full Suspension N/A Standard Standard	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full Suspension N/A Standard Standard Standard	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full Suspension N/A Standard Standard	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full Suspension N/A Standard Standard	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full Suspension N/A Standard Standard	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full Suspension N/A Standard Standard	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full Suspension N/A Standard Standard
FEATURES	FRONT AXLE FRONT REAR SEAT HOOD HOUR METER W/ MAINTENANCE REMINDER SUSPENSION SEAT W/ PAD ARMREST FOLDABLE ROPS WEIGHT (LBS)	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full Suspension N/A Standard Standard Standard	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full Suspension N/A Standard Standard Standard	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full Suspension N/A Standard Standard Standard	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full Suspension N/A Standard Standard Standard	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full Suspension N/A Standard Standard Standard	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full Suspension N/A Standard Standard Standard	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full Suspension N/A Standard Standard Standard	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full Suspension N/A Standard Standard Standard	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full Suspension N/A Standard Standard Standard
FEATURES	FRONT AXLE FRONT REAR SEAT HOOD HOUR METER W/ MAINTENANCE REMINDER SUSPENSION SEAT W/ PAD ARMREST FOLDABLE ROPS WEIGHT (LBS) LENGTH (INCHES)	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full Suspension N/A Standard Standard Standard 1062 78.6*	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full Suspension N/A Standard Standard Standard 1051 78.6"	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full Suspension N/A Standard Standard Standard 1056 78.6"	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full Suspension N/A Standard Standard Standard 1079 78.6"	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full Suspension N/A Standard Standard Standard 1068 78.6"	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full Suspension N/A Standard Standard Standard 1073 78.6"	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full Suspension N/A Standard Standard Standard 1121 78.6"	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full Suspension N/A Standard Standard Standard 1110 78.6"	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full Suspension N/A Standard Standard Standard 1115 78.6"
FEATURES	FRONT AXLE FRONT REAR SEAT HOOD HOUR METER W/ MAINTENANCE REMINDER SUSPENSION SEAT W/ PAD ARMREST FOLDABLE ROPS WEIGHT (LBS) LENGTH (INCHES) WIDTH W/O CHUTE	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full Suspension N/A Standard Standard Standard 1062 78.6" 50"	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full Suspension N/A Standard Standard 1051 78.6" 50"	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full Suspension N/A Standard Standard 1056 78.6" 55.5"	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full Suspension N/A Standard Standard 1079 78.6" 55.5"	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full Suspension N/A Standard Standard 1068 78.6" 55.5"	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full Suspension N/A Standard Standard 1073 78.6" 63	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full Suspension N/A Standard Standard 1121 78.6" 63"	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full Suspension N/A Standard Standard 1110 78.6" 63	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full Suspension N/A Standard Standard 5tandard 1115 78.6" 63
FEATURES	FRONT AXLE FRONT REAR SEAT HOOD HOUR METER W/ MAINTENANCE REMINDER SUSPENSION SEAT W/ PAD ARMREST FOLDABLE ROPS WEIGHT (LBS) LENGTH (INCHES) WIDTH W/O CHUTE WIDTH (INCHES)	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full Suspension N/A Standard Standard Standard 1062 78.6" 50"	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full Suspension N/A Standard Standard 1051 78.6" 50" 62"	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full Suspension N/A Standard Standard 1056 78.6" 55.5" 62"	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full Suspension N/A Standard Standard 1079 78.6" 55.5" 67.5"	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full Suspension N/A Standard Standard 1068 78.6" 55.5" 67.5"	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full Suspension N/A Standard Standard 1073 78.6" 63 67.5"	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full Suspension N/A Standard Standard 1121 78.6" 63" 75"	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full Suspension N/A Standard Standard 1110 78.6" 63 75"	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full Suspension N/A Standard Standard Standard 1115 78.6" 63 75"
FEATURES	FRONT AXLE FRONT REAR SEAT HOOD HOUR METER W/ MAINTENANCE REMINDER SUSPENSION SEAT W/ PAD ARMREST FOLDABLE ROPS WEIGHT (LBS) LENGTH (INCHES) WIDTH W/O CHUTE WIDTH (INCHES) HEIGHT W/ ROPS	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full Suspension N/A Standard Standard Standard 1062 78.6° 50" 62" 71" / 48"	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full Suspension N/A Standard Standard Standard 1051 78.6" 50" 62" 71" / 48"	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full Suspension N/A Standard Standard Standard 1056 78.6" 55.5" 62" 71" / 48"	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full Suspension N/A Standard Standard 1079 78.6" 55.5" 67.5" 71" / 48"	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full Suspension N/A Standard Standard Standard 1068 78.6" 55.5" 67.5" 71" / 48"	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full Suspension N/A Standard Standard 1073 78.6" 63 67.5" 71" / 48"	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full Suspension N/A Standard Standard Standard 1121 78.6" 63" 75" 71" / 48"	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full Suspension N/A Standard Standard 1110 78.6" 63 75" 71" / 48"	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full Suspension N/A Standard Standard Standard 1115 78.6" 63 75" 71" / 48"
FEATURES	FRONT AXLE FRONT REAR SEAT HOOD HOUR METER W/ MAINTENANCE REMINDER SUSPENSION SEAT W/ PAD ARMREST FOLDABLE ROPS WEIGHT (LBS) LENGTH (INCHES) WIDTH W/O CHUTE WIDTH (INCHES) HEIGHT W/ ROPS	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full Suspension N/A Standard Standard Standard 1062 78.6" 50" 62" 71" / 48"	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full Suspension N/A Standard Standard 1051 78.6" 50" 62" 71" / 48"	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full Suspension N/A Standard Standard 1056 78.6" 55.5" 62" 71" / 48"	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full Suspension N/A Standard Standard 1079 78.6" 55.5" 67.5" 71" / 48"	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full Suspension N/A Standard Standard 1068 78.6" 55.5" 67.5" 71" / 48"	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full Suspension N/A Standard Standard 1073 78.6" 63 67.5" 71" / 48"	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full Suspension N/A Standard Standard Standard 1121 78.6" 63" 75" 71" / 48"	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full Suspension N/A Standard Standard 1110 78.6" 63 75" 71" / 48"	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full Suspension N/A Standard Standard 1115 78.6" 63 75" 71" / 48"
FEATURES MACHINE	FRONT AXLE FRONT REAR SEAT HOOD HOUR METER W/ MAINTENANCE REMINDER SUSPENSION SEAT W/ PAD ARMREST FOLDABLE ROPS WEIGHT (LBS) LENGTH (INCHES) WIDTH W/O CHUTE WIDTH (INCHES) HEIGHT W/ ROPS UNIT DECK SHELL & FRAME	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full Suspension N/A Standard Standard Standard 1062 78.6" 50" 62" 71" / 48"	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full Suspension N/A Standard Standard Standard 1051 78.6" 50" 62" 71" / 48"	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full Suspension N/A Standard Standard Standard 1056 78.6" 55.5" 62" 71" / 48"	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full Suspension N/A Standard Standard 1079 78.6" 55.5" 67.5" 71" / 48" 2 Year Limited Commercial Limited Lifetime	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full Suspension N/A Standard Standard 1068 78.6" 55.5" 67.5" 71" / 48" 2 Year Limited Commercial Limited Lifetime	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full Suspension N/A Standard Standard 1073 78.6" 63 67.5" 71" / 48"	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full Suspension N/A Standard Standard 1121 78.6" 63" 75" 71" / 48" 2 Year Limited Commercial Limited Lifetime	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full Suspension N/A Standard Standard Standard 1110 78.6" 63 75" 71" / 48"	Fixed. Greaseable caster fork tubes Smooth 13x6.50-6 Turf 23 x 10.50-12 High Back w/ Full Suspension N/A Standard Standard Standard 1115 78.6" 63 75" 71" / 48" 2 Year Limited Commercial Limited Lifetime

	PRODUCT NAME	Pro-Turn 48	Pro-Turn 48	Pro-Turn 52	Pro-Turn 52	Pro-Turn 60	Pro-Turn 60
	MODEL NUMBER	991215 991221*	991218	991216 991222*	991219	991217 991223*	991220
	ENGINE	Kawasaki® FS691V Air-cooled, V-twin	Kohler® ZT730 Air-cooled, V-twin	Kawasaki® FS691V Air-cooled, V-twin	Kohler® ZT730 Air-cooled, V-twin	Kawasaki® FS730V Air-cooled, V-twin	Kohler® ZT740 Air-cooled, V-twin
	HORSEPOWER	23	23	23	23	24	25
					-		
	DISPLACEMENT (CC)	726	747	726	747	726	747
	DRIVE SYSTEM	Hydro-Gear® ZT-3200 Transaxles					
	FUEL CAPACITY - GALLONS (LITERS)	10.0(37.8)	10.0(37.8)	10.0(37.8)	10.0(37.8)	10.0(37.8)	10.0(37.8)
	GROUND SPEED (APPROX. MPH) (FORWARD/REVERSE)	9 mph/5 mph					
DECK	STARTER	Electric	Electric	Electric	Electric	Electric	Electric
	DECK MATERIAL	10 ga steel w/ 1/4" spindle reinforcement	10 ga steel with 10ga spindle reinforcement	10 ga steel with 10ga spindle reinforcement			
	DECK CONSTRUCTION	Fabricated	Fabricated	Fabricated	Fabricated	Fabricated	Fabricated
	NUMBER OF SPINDLES	3	3	3	3	3	3
	BLADE TIP SPEED (FPM)	18,000	18,000	18,000	18,000	18,000	18,000
	SPINDLE HOUSING MATERIAL	Cast Iron					
	SPINDLE SHAFT	Steel	Steel	Steel	Steel	Steel	Steel
	SPINDLE BEARINGS	Ball Bearing					
	DECK DRIVE	V-Belt	V-Belt	V-Belt	V-Belt	V-Belt	V-Belt
	DECK ENGAGEMENT	Electric Ogura® GT1A					
			-	-			-
	DECK LIFT SYSTEM	Adj Foot Operated					
	CUTTING WIDTH	48"	48"	52"	52"	60"	60"
	CUTTING HEIGHTS	1.0"-5.0"	1.0"-5.0"	1.0"-5.0"	1.0"-5.0"	1.0"-5.0"	1.0"-5.0"
	CUTTING POSITIONS	17	17	17	17	17	17
VHEELS							
	FRONT AXLE	Fixed. Greaseable caster fork tubes	Fixed. Greaseable cast fork tubes				
	FRONT	Smooth 13x6.50-6					
	REAR	Turf 22 x 10-10					
EATURES							
	SEAT	High Back Comfort w/ Integrated Suspension					
	HOOD	N/A	N/A	N/A	N/A	N/A	N/A
	HOUR METER W/ MAINTENANCE REMINDER	Standard	Standard	Standard	Standard	Standard	Standard
	SUSPENSION SEAT W/ PAD ARMREST	N/A	N/A	N/A	N/A	N/A	N/A
1ACHINE	FOLDABLE ROPS	Standard	Standard	Standard	Standard	Standard	Standard
	WEIGHT	964	953	977	966	1006	995
	LENGTH	78.5"	78.5"	78.5"	78.5"	78.5"	78.5"
	WIDTH W/O CHUTE	50"	50"	55.5"	55.5"	63"	63"
	WIDTH WITH CHUTE	62.25"	62.25"	67.75"	67.75"	75.25"	75.25"
		QE.EU	JE.EJ	57.75	J.13	, 0.20	7-0.2-0
	HEIGHT W/ ROPS FOLDED DOWEXT/ DOWN	70" / 46.7"	70" / 46.7"	70" / 46.7"	70" / 46.7"	70" / 46.7"	70" / 46.7"
VARRANTY	HAUT	2 Year/1000 Hour Limited	2 Year/1000 Hour Limit				
	DECK SHELL & FRAME	Commercial 5 Year Limited	Commercial 5 Year Limited				
TTACHMENTS ACCESSORIES	DEGRESHELL & FRANCE	5 rear Ennited	5 fear Ennited	5 fear Ennited	5 real chinted	5 lear connect	J rear Emilited

55

PRO-STANCE

COMPACT PRO		
	PRODUCT NAME	Compact-Pro 34
	MODEL NUMBER	991088/991105*
	ENGINE	Kawasaki® FX Air-cooled vertical twin, Heavy Duty Air Cleaner
	HORSEPOWER	15.5
	DISPLACEMENT (CC)	603
	DRIVE SYSTEM	Hydrostatic Hydro-Gear® 10cc Pumps with Hydro-Gear® 12P Wheel motors
	FUEL CAPACITY – GALLONS (LITERS)	7.3 (27.6)
	GROUND SPEED (APPROX. MPH FORWARD/REVERSE)	9 mph / 4.5 mph
	STARTER	Electric
DECK		
	DECK MATERIAL	7 ga steel with 7 ga (.179") spindle reinforcement
	DECK CONSTRUCTION	Welded
	NUMBER OF SPINDLES	2
	BLADE TIP SPEED (FPM)	18,000
	SPINDLE HOUSING MATERIAL	Cast Iron
	SPINDLE SHAFT	Steel
	SPINDLE BEARINGS	Ball Bearing
	DECK DRIVE	Belt
	DECK ENGAGEMENT	Electric Ogura® GT1A
	DECK LIFT SYSTEM	Foot Operated
	CUTTING WIDTH	34"
	CUTTING HEIGHT	1.0"-5.0"
	CUTTING POSITIONS	9
WHEELS		
	FRONT AXLE	Fixed
	FRONT	Smooth 13 x 5-6
	REAR	21 x 7-10 turf
FEATURES		
	SEAT	High Back w/ seat springs
	HOOD	N/A
	HOUR METER W/ MAINTENANCE REMINDER	Standard
	SUSPENSION SEAT W/ PAD ARMREST	N/A
	FOLDABLE ROPS	N/A
MACHINE	7 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 - 1 -	
	WEIGHT (LBS) W/O FUEL	725
	LENGTH	71.5"
	WIDTH WITHOUT CHUTE	35.4"
	WIDTH WITH CHUTE	50"
WARRANTY		
	UNIT	2 Year Limited Commercial
	DECK SHELL & FRAME	Limited Lifetime
ATTACHMENTS & ACCESSORIES	SPINDLES	3 Year Limited Spindle
W ACCESSORIES	Mulching Kit, Discharge Cover Kit, Hub Cap Kit, Flextend Should	er Support Kit, Solid Tire Kit, True Power Tire Kit, Trailer Hitch Kit, Headlight

	PRODUCT NAME	Pro-Stance 36FL	Pro-Stance 48FL	Pro-Stance 52FL	Pro-Stance 52FL	Pro-Stance 52FL	Pro-Stance 60FL	Pro-Stance 60FL	Pro-Stance 52FL	Pro-Stance 60FL
	MODEL NUMBER	994131 994139*	994132	994133	994142	994134	994137	994143	994136*	994140*
	ENGINE	Kawasaki® FS 600 V-Twin	Kawasaki® FX 691 V-Twin	Kawasaki® FX 691 V-Twin	Kohler® EFI EZT725	Kohler® ZT730	Kawasaki® FX 730 V-Twin	Kohler® EFI EZT740	Kohler® PCV740 EFI LP	Kohler® PCV740 EFI LP
	HORSEPOWER	18.5	22	22	22	23	23.5	25	24	24
	DISPLACEMENT (CC)	603	726	726	747	747	726	747	747	747
	DRIVE SYSTEM	Hydro-Gear® ZT- 3100 Integrated	Hydro-Gear® ZT- 3400 Integrated	Hydro-Gear® ZT- 3400 Integrated	Hydro-Gear® ZT- 3400 Integrated	Hydro-Gear® ZT- 3400 Integrated	Hydro-Gear® ZT- 3400 Integrated	Hydro-Gear® ZT- 3400 Integrated	Hydro-Gear® ZT- 3400 Integrated	Hydro-Gear® ZT- 3400 Integrated
	FUEL CAPACITY GALLONS (LITERS)	pump/motor 6 gallon (22.7 L)	pump/motor 9 gallon (34.1 L)	pump/motor 9 gallon (34.1 L)	pump/motor 9 gallon (34.1 L)	pump/motor 9 gallon (34.1 L)	pump/motor 9 gallon (34.1 L)	pump/motor 9 gallon (34.1 L)	pump/motor 33.5# Tank (Tank not included)	pump/motor 33.5# Tank (Tank not included)
	GROUND SPEED (APPROX. MPH) (FORWARD/REVERSE)	8 mph / 3 mph	9 mph / 4 mph	9 mph / 4 mph	9 mph / 4 mph	9 mph / 4 mph	9 mph / 4 mph	9 mph / 4 mph	9 mph / 4 mph	9 mph / 4 mph
501/	STARTER STARTER	Electric	Electric	Electric	Electric	Electric	Electric	Electric	Electric	Electric
ECK	DECK MATERIAL	7 Ga	7 Ga	7 Ga	7 Ga	7 Ga	7 Ga	7 Ga	7 Ga	7 Ga
	DECK MATERIAL DECK CONSTRUCTION									
		Welded	Welded	Welded	Welded	Welded	Welded	Welded	Welded	Welded
	NUMBER OF SPINDLES	10 220	10,000	10,000	3	3	10,000	19,000	19,000	19,000
	SPINDLE HOUSING MATERIAL	18,220 Cast	18,000 Cast	18,000 Cast	18,000 Cast	18,000 Cast	18,000 Cast	18,000 Cast	18,000 Cast	18,000 Cast
	SPINDLE SHAFT	Steel	Steel	Steel	Steel	Steel	Steel	Steel	Steel	Steel
	SPINDLE BEARINGS	Ball Bearing	Ball Bearing	Ball Bearing	Ball Bearing	Ball Bearing	Ball Bearing	Ball Bearing	Ball Bearing	Ball Bearing
	DECK DRIVE	Belt	Belt	Belt	Belt	Belt	Belt	Belt	Belt	Belt
	DECK DRIVE DECK ENGAGEMENT	Electric Clutch	Electric Clutch	Electric Clutch	Electric Clutch	Electric Clutch	Electric Clutch	Electric Clutch	Electric Clutch	Electric Clutch
	DECK LIFT SYSTEM	Manual	Manual	Manual	Manual	Manual	Manual	Manual	Manual	Manual
	CUTTING WIDTH CUTTING HEIGHTS	15" 50"	15" 50"	1.5" 5.0"	1 5" 5 0"	1 5" 5 0"	1.5" - 5.0"	1.5" - 5.0"	1.5" - 5.0"	1.5" - 5.0"
	CUTTING POSITIONS	1.5" - 5.0"	1.5" - 5.0"	1.5" - 5.0"	1.5" - 5.0"	1.5" - 5.0"	1.5" - 5.0"	1.5" - 5.0"	1.5" - 5.0"	1.5" - 5.0"
/HEELS										
	FRONT AXLE	Rigid	Rigid	Rigid	Rigid	Rigid	Rigid	Rigid	Rigid	Rigid
	FRONT	11x4.00-5 Semi-Pneumatic	13x6.50-6 Semi-Pneumatic	13x6.50-6 Semi-Pneumatic	13x6.50-6 Semi-Pneumatic	13x6.50-6 Semi-Pneumatic	13x6.50-6 Semi-Pneumatic	13x6.50-6 Semi-Pneumatic	13x6.50-6 Semi-Pneumatic	13x6.50-6 Semi-Pneumatio
	REAR	18 x 8.50 - 8	20x10.50-8 Radial	20x10.50-8 Radial	20x10.50-8 Radial	20x10.50-8 Radial	20x10.50-8 Radial	20x10.50-8 Radial	20x10.50-8 Radial	20x10.50-8 Radial
EATURES										
	HOOD	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	HOUR METER W/ MAINTENANCE REMINDER	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard
	SUSPENSION SEAT	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
A CLUME										
ACHINE										
ACHINE	WEIGHT (LBS)	784	995	1015	1015	1004	1043	1048	1108 w/ full LP tank	1136 w/ full LP tank
ACHINE	WEIGHT (LBS) LENGTH (INCHES)	784 59.5	995 60.63	1015	1015	1004	1043	1048		
ACHINE									tank	tank
ACHINE	LENGTH (INCHES) WIDTH W/O CHUTE	59.5	60.63	60.63	60.63	60.63	62	62	60.63	tank 62
ACHINE	LENGTH (INCHES) WIDTH W/O CHUTE (INCHES) WIDTH W/CHUTE	59.5	60.63	60.63 55.5	60.63	60.63	62	62	tank 60.63 55.5	62 63
	LENGTH (INCHES) WIDTH W/O CHUTE (INCHES) WIDTH W/CHUTE (INCHES)	59.5 36.5 49	60.63 50 62.25	60.63 55.5 67.75	60.63 55.5 67.75	60.63 55.5 67.75	62 63 75.25	62 63 75.25	60.63 55.5 67.75	62 63 75.25
	LENGTH (INCHES) WIDTH W/O CHUTE (INCHES) WIDTH W/CHUTE (INCHES)	59.5 36.5 49	60.63 50 62.25	60.63 55.5 67.75	60.63 55.5 67.75	60.63 55.5 67.75	62 63 75.25	62 63 75.25	60.63 55.5 67.75	62 63 75.25
	LENGTH (INCHES) WIDTH W/O CHUTE (INCHES) WIDTH W/CHUTE (INCHES) HEIGHT (INCHES)	59.5 36.5 49 48 2 Year Limited	60.63 50 62.25 48 2 Year Limited	60.63 55.5 67.75 48	60.63 55.5 67.75 48	60.63 55.5 67.75 48	62 63 75.25 48 2 Year Limited	62 63 75.25 48 2 Year Limited	tank 60.63 55.5 67.75 48 2 Year Limited	tank 62 63 75.25 48 2 Year Limited Commercial
/ARRANTY	LENGTH (INCHES) WIDTH W/O CHUTE (INCHES) WIDTH W/CHUTE (INCHES) HEIGHT (INCHES)	59.5 36.5 49 48 2 Year Limited Commercial	60.63 50 62.25 48 2 Year Limited Commercial	60.63 55.5 67.75 48 2 Year Limited Commercial	60.63 55.5 67.75 48 2 Year Limited Commercial	60.63 55.5 67.75 48 2 Year Limited Commercial	62 63 75.25 48 2 Year Limited Commercial	62 63 75.25 48 2 Year Limited Commercial	tank 60.63 55.5 67.75 48 2 Year Limited Commercial	tank 62 63 75.25 48 2 Year Limited
	LENGTH (INCHES) WIDTH W/O CHUTE (INCHES) WIDTH W/CHUTE (INCHES) HEIGHT (INCHES) UNIT DECK SHELL & FRAME	59.5 36.5 49 48 2 Year Limited Commercial Limited Lifetime	60.63 50 62.25 48 2 Year Limited Commercial Limited Lifetime	60.63 55.5 67.75 48 2 Year Limited Commercial Limited Lifetime	60.63 55.5 67.75 48 2 Year Limited Commercial Limited Lifetime	60.63 55.5 67.75 48 2 Year Limited Commercial Limited Lifetime	62 63 75.25 48 2 Year Limited Commercial Limited Lifetime	62 63 75.25 48 2 Year Limited Commercial Limited Lifetime	tank 60.63 55.5 67.75 48 2 Year Limited Commercial Limited Lifetime	tank 62 63 75.25 48 2 Year Limited Commercial Limited Lifetime

* = CARB Compliant

		Pro-Walk	Pro-Walk	Pro-Walk	Pro-Walk	Pro-Walk	Pro-Walk	Pro-Walk	Pro-Walk
	PRODUCT NAME	32GR	36GR	48GR	36HR PS	48HE	52HE	60HE	HR PS
	MODEL NUMBER	988150*	988151*	988152*	988156*	988172 988176*	988173 988177*	988174 988178*	988181*
	ENGINE	Kawasaki® FS481V	Kawasaki® FS481V	Kawasaki® FS481V	Kawasaki® FS481V	Kawasaki® FS600V	Kawasaki® FS600V	Kawasaki® FS691V	Kohler® PCV680 EFI LP
	HORSEPOWER	14.5	14.5	14.5	14.5	18.5	18.5	23	22
	DISPLACEMENT (CC)	603	603	603	603	603	603	726	747
	DRIVE SYSTEM	Peerless Gear Drive	Peerless Gear Drive	Peerless Gear Drive	10cc Pumps and 12ci Motors	Hydro-Gear® ZT-2800 Integrated pump/motor	Hydro-Gear® ZT-2800 Integrated pump/motor	Hydro-Gear® ZT-2800 Integrated pump/motor	10cc Pumps an 12ci Motors
	FUEL CAPACITY GALLONS (LITERS)	5.8 gallon (22 L)	5.8 gallon (22 L)	5.8 gallon (22 L)	5.8 gallon (22 L)	5.8 gallon (22			
	GROUND SPEED (APPROX. MPH) (FORWARD/REVERSE)	5.4 mph / Reverse Assist	5.4 mph / Reverse Assist	5.4 mph / Reverse Assist	7 mph / 3 mph	7 mph / 3 mph	7 mph / 3 mph	7 mph / 3 mph	7 mph / 3 mph
	STARTER	Recoil	Recoil	Recoil	Recoil	Electric	Electric	Electric	Electric
СК									
	DECK CONSTRUCTION	7 Ga Wolded	7 Ga Wolded	7 Ga Wolded	7 Ga Wolded	10 Ga Wolded	10 Ga Waldad	10 Ga Wolded	7 Ga Wolded
	DECK CONSTRUCTION	Welded	Welded	Welded	Welded	Welded	Welded	Welded	Welded
	NUMBER OF SPINDLES	19 500	10.152	3	10 241	3	19,000	19.000	10 241
	SPINDLE HOUSING	18,500 Aluminum	18,152 Aluminum	18,500 Aluminum	18,261 Aluminum	18,000 Cast	18,000 Cast	18,000 Cast	18,261 Aluminum
	MATERIAL SPINDLE SHAFT	1" Steel	1" Steel	1" Steel	1" Steel	Steel	Steel	Steel	1" Steel
	SPINDLE BEARINGS	1" Sealed	1" Sealed	1" Sealed	1" Sealed	Ball Bearing	Ball Bearing	Ball Bearing	1" Sealed
	DECK DRIVE	Belt	Belt	Belt	Belt	Belt	Belt	Belt	Belt
	DECK ENGAGEMENT	Electric Clutch	Electric Clutch	Electric Clutch	Electric Clutch	Electric Clutch	Electric Clutch	Electric Clutch	Electric Clutch
	DECK LIFT SYSTEM	Manual	Manual	Manual	Manual	Manual	Manual	Manual	Manual
	CUTTING WIDTH	32"	36"	48"	36"	52"	52"	52"	36"
	CUTTING HEIGHTS	1.5" - 4.5"	1.5" - 4.5"	1.5" - 4.5"	1.5" - 5.0"	1.5" - 5.0"	1.5" - 5.0"	1.5" - 5.0"	1.5" - 5.0"
	CUTTING POSITIONS (1/4" INCREMENTS)	13	13	13	15	15	15	15	15
IEELS	(I) + II CREWEITS)								
	FRONT AXLE	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	FRONT WHEELS	9 x 3.50	9 x 3.50	9 x 3.50	9 x 3.50	11x4.00-5 Semi-Pneumatic	11x4.00-5 Semi-Pneumatic	11x4.00-5 Semi-Pneumatic	9 x 3.50
	REAR	13 x 5	13 x 6.5	13 x 6.5	16 x 6.5	20 X 8-10	20 X 8-10	20 X 8-10	16 x 7.5
ATURES	HOOD	N/A	N/A	N/A	N/A	N/A	N/A	N/A	N/A
	HOUR METER W/ MAINTENANCE REMINDER	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard
CHINE									
	WEIGHT (LBS)	504	504	572	558	758	768	788	765 w/ Full Tai
	LENGTH (INCHES)	77"	77"	77"	72"	79"	81"	83"	77"
	WIDTH (INCHES)	45.7"	48.4"	60.8"	37"	51"	55"	63"	48.5"
RRANTY	HEIGHT (INCHES)	41.9"	41.9"	41.9"	43"	44"	44"	44"	43"
	UNIT	2 Year Limited Commercial	2 Year Limited Commercial	2 Year Limited Commercial	2 Year Limited Commercial	2 Year Limited Commercial	2 Year Limited Commercial	2 Year Limited Commercial	2 Year Limited Commercial
	DECK SHELL & FRAME	Limited Lifetime	Limited Lifetime	Limited Lifetime	Limited Lifetime	Limited Lifetime	Limited Lifetime	Limited Lifetime	Limited Lifetir
	SPINDLES	2 Year Limited	2 Year Limited	2 Year Limited	3 Year Limited	3 Year Limited	3 Year Limited	3 Year Limited	3 Year Limited
ACHMENTS									
CCESSORIES									

PRO-QXT™ T	TRACTOR	
	PRODUCT NAME	PRO-QXT Tractor
	MODEL NUMBER	985910*
	ENGINE	Subaru®
	HORSEPOWER	14
	DISPLACEMENT (CC)	404
	DRIVE SYSTEM	Hydro-Gear® ZT - 2800 Transaxles
	FUEL CAPACITY – GALLONS (LITERS)	1.8 gallon (7.0 L)
	GROUND SPEED (APPROX. MPH FORWARD/REVERSE)	5 mph / 2 mph
	STARTER	Electric & Recoil
TIRES		
	REAR	Turf 20 x 8 - 10
MACHINE		
	WEIGHT (LBS) W/O FUEL	520
	LENGTH	55.5"
	WIDTH	30.5"
	HEIGHT	39"
PTO COUPLER		
	PTO SPEED	900 rpm
	ENGAGMENT	Electric
	PTO DRIVE	Dual Belt
FEATURES		
	HOUR METER	Standard
	POWER STEERING	Standard
	POWER STEERING LOCK OUT	Standard
WARRANTY		
	TRACTOR	2 Year Limited
	ENGINE	5 Year Limited
ACCESSORIES		
	Work Light, Tire Chain, Ag Tires, To	wist Grin Bing

PRO-QXT™ TRACTOR ATTACHMENTS								
PRODUCT NAME	MODEL	WIDTH						
POWER BRUSH	885911	44"						
DOZER BLADE	885910	48"						
SNOW BLOWER	885912	32"						
BRUSH MOWER	885913	32"						
FINISH MOWER	885914	36"						
FINISH MOWER	885915	48"						

6U

POWER BRUSH

	PRODUCT NAME	Power Brush 28"	Power Brush 36"	Hydro Brush 36"
	MODEL NUMBER	921026*	926063*	926064*
	ENGINE	Subaru® EX17	Subaru® EX27	Subaru® EX30
	HORSEPOWER	169	265	287
	DISPLACEMENT (CC)	169	265	287
	DRIVE SYSTEM	Disc-O-Matic	Disc-O-Matic	Hydrostatic
	STEERING	Automatic Traction Control	Automatic Traction Control	Automatic Traction Control
	SPEEDS	6 forward / 2 reverse	6 forward / 2 reverse	Variable
	STARTER	120 v / Recoil	120 v / Recoil	12 v Key Start
CLEARING FEATURES				
	CLEARING WIDTH	28"	36"	36"
	AUGER DIAMETER	18" Brush	25" Brush	25" Brush
	AUGER TYPE	Brush	Brush	Brush
WHEELS				
	TIRE SIZE	15 x 5	16 x 6.5	16 x 6.5
	TIRE TYPE	Directional Snow Tread	Directional Snow Tread	Directional Snow Tread
FEATURES				
	HALOGEN HEADLIGHT	No	Standard	Standard
	HANDWARMERS	No	No	Standard
MACHINE				
	WEIGHT (LBS)	202	325	418
	LENGTH	65"	72"	72"
	WIDTH	33"	44"	44"
	HEIGHT	44"	43"	43"
WARRANTY				
	UNIT	3 Year Limited Consumer, 90 Day Commercial	3 Year Limited Consumer, 1 Year Commercial	3 Year Limited Consumer, 1 Year Commercial
ATTACHMENTS & ACCESSORIES				
		Electric Start, One Hand Interlock	Halogen Headlight, Electric Start, One Hand Interlock	Halogen Headlight, Handwarmers, Electric Start, One Hand Interlock

* = CARB Compliant

ATLAS JSV					
	PRODUCT NAME	Atlas JSV-3000 EFI Gas	Atlas JSV-6000 EFI Gas Crew	Atlas JSV-3000 Diesel	Atlas JSV-6000 Diesel Crev
	MODEL NUMBER	996200	996201	996202	996203
	ENGINE	Polaris® 1-cylinder, DOHC, Gas	Polaris® 1-cylinder, DOHC, Gas	Kohler® 3-Cylinder Diesel	Kohler® 3-Cylind Diesel
	HORSEPOWER	40	40	24	24
	DISPLACEMENT (CC)	570 сс	570 сс	1028 сс	1028 сс
	DRIVE SYSTEM	OnDemand True AWD/2WD/ VersaTrac Turf Mode	OnDemand True AWD/2WD/ VersaTrac Turf Mode	OnDemand True AWD/2WD/ VersaTrac Turf Mode	OnDemand True AWD/2WD/ VersaTrac Turf Mo
	FUEL CAPACITY – GALLONS (LITERS)	10 gallons EFI	10 gallons EFI	10 gallons Indirect Injection	10 gallons Indire Injection
	GROUND SPEED (APPROX. MPH FORWARD/REVERSE)	35 mph	35 mph	35 mph	35 mph
	STARTER	Electric Ignition	Electric Ignition	Electric Ignition	Electric Ignition
TIRES & WHEELS					
	FRONT & REAR TIRES	25 x 10 Carlisle All Trail I (Front) / 25 x 11 Carlisle All Trail II (Rear)	25 x 10 Carlisle All Trail I (Front) / 25 x 11 Carlisle All Trail II (Rear)	25 x 10 Carlisle All Trail I (Front) / 25 x 11 Carlisle All Trail II (Rear)	25 x 10 Carlisle Trail I (Front) / 25 x 11 Carlisle All Trail II (Rear)
	FRONT & REAR WHEELS	12 x 6 Steel (Front) / 12 x 8 Steel (Rear)	12 x 6 Steel (Front) / 12 x 8 Steel (Rear)	12 x 6 Steel (Front) / 12 x 8 Steel (Rear)	12 x 6 Steel (Front) / 12 x 8 Steel (Rear)
FEATURES					
	BED LIFT	Standard, Electric	Standard, Electric	Standard, Electric	Standard, Electri
	FRONT BUMPER	Standard, Heavy Duty	Standard, Heavy Duty	Standard, Heavy Duty	Standard, Heavy Duty
	нітсн	Standard, Heavy Duty	Standard, Heavy Duty	Standard, Heavy Duty	Standard, Heavy Duty
	ROPS	According to ANSI/O	PEI B71.9, OSHA 1928	3.53	
VEHICLE DIMENSIONS					
	WEIGHT (LBS) W/O FUEL	1,575	1,800	1,675	1,900
	LENGTH	128"	165"	128"	128"
	WIDTH X HEIGHT	64" x 73.5"	64" x 73.5"	64" x 73.5"	64" x 73.5"
	WHEEL BASE	84"	116"	84"	116"
	GROUND CLEARANCE	12"	12"	12"	12"
WARRANTY					
	UNIT	1 Year Limited Commercial	1 Year Limited Commercial	1 Year Limited Commercial	1 Year Limited Commercial
INSTRUMENTA- TION					_
	6 1			1 0 0 1	1 D 1 D 10 D 10 D

61

Speedometer, tachometer, fuel gauge, hour meter, odometer & trip meter, gear indication, glow plug indicator light* & engine oil pressure* (*diesel models only), seat belt reminder light, battery voltage charge system, engine/coolant temp, 2 in-dash 12V power outlets

	RODUCT NAME							
	RODUCT NAME							
		ZT HD 44	ZT HD 48	ZT HD 48	ZT HD 52	ZT HD 52	ZT HD 60	ZT HD 60
	ODEL NUMBER	991160/ 991180*	991162/ 991182*	991152	991164/ 991184*	991154	991166/ 991186*	991156
E	NGINE	Kawasaki® FR V-Twin	Kawasaki® FR V-Twin	Kohler® 7000 Series HD V-Twin w/ Smart Choke™	Kawasaki® FR V-Twin	Kohler® 7000 Series HD V-Twin w/ Smart Choke™	Kawasaki® FR V-Twin	Kohler® 7000 Series HD V-Twin w/ Smart Choke™
н	IORSEPOWER	21.5	23	25	23	25	24	26
D	ISPLACEMENT (CC)	726	726	725	726	725	726	747
D	PRIVE SYSTEM	Hydro-Gear® ZT-3100 Transaxles	Hydro-Gear® ZT-3100 Transaxles	Hydro-Gear® ZT-3100 Transaxles	Hydro-Gear® ZT-3100 Transaxles	Hydro-Gear® ZT-3100 Transaxles	Hydro-Gear® ZT-3100 Transaxles	Hydro-Gear® ZT-3100 Transaxles
	UEL CAPACITY – GALLONS (LITERS)	5.0 gallon (18.9 L)	5.0 gallon (18.9 L)	5.0 gallon (18.9 L)	5.0 gallon (18.9 L)			
(4	ROUND SPEED APPROX. MPH ORWARD/REVERSE)	8 mph / 4 mph	8 mph / 4 mph	8 mph / 4 mph	8 mph / 4 mph			
DECK	PECK MATERIAL	10 ga steel	10 ga steel	10 ga steel	10 qa steel	10 ga steel	10 ga steel	10 ga steel
_	ECK CONSTRUCTION	Welded	Welded	Welded	Welded	Welded	Welded	Welded
	IUMBER OF SPINDLES		3	3	3	3	3	3
В	LADE TIP SPEED	18,000	18,000	18,000	17,500	17,500	18,000	18,000
S	PINDLE HOUSING	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum	Aluminum
	PINDLE SHAFT	Steel	Steel	Steel	Steel	Steel	Steel	Steel
S	PINDLE BEARINGS	Ball Bearing	Ball Bearing	Ball Bearing	Ball Bearing	Ball Bearing	Ball Bearing	Ball Bearing
	ECK DRIVE	Belt	Belt	Belt	Belt	Belt	Belt	Belt
D	ECK ENGAGEMENT	Electric Ogura®	Electric Ogura®	Electric Ogura®	Electric Ogura®	Electric Ogura®	Electric Ogura®	Electric Ogura®
	DECK LIFT SYSTEM	Foot Operated	Foot Operated	Foot Operated	Foot Operated	Foot Operated	Foot Operated	Foot Operated
С	UTTING WIDTH	44"	48"	48"	52"	52"	60"	60"
	UTTING HEIGHT	1.5"-5.0"	1.5"-5.0"	1.5"-5.0"	1.5"-5.0"	1.5"-5.0"	1.5"-5.0"	1.5"-5.0"
C	UTTING POSITIONS	15	15	15	15	15	15	15
WHEELS		-				-		
F'	RONT AXLE	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
F	RONT	13x 6.5-6	13x 6.5-6	13x 6.5-6	13x 6.5-6	13x 6.5-6	13x 6.5-6	13x 6.5-6
R	EAR	22 x 10-12	22 x 10-12	22 x 10-12	22 x 10.5-12	22 x 10.5-12	22 x 12-12	22 x 12-12
FEATURES								
	EAT	High Back Comfort w/ Seat Springs, Lever Adjust, Padded Arm Rests	High Back Comfort w/ Seat Springs, Lever Adjust, Padded Arm Rests	High Back Comfort w/ Seat Springs, Lever Adjust, Padded Arm Rests	High Back Comfort w/ Seat Springs, Lever Adjust, Padded Arm Rests	High Back Comfort w/ Seat Springs, Lever Adjust, Padded Arm Rests	High Back Comfort w/ Seat Springs, Lever Adjust, Padded Arm Rests	High Back Comfort w/ Seat Springs, Lever Adjust, Padded Arm Rests
н	IOUR METER	Standard	Standard	Standard	Standard	Standard	Standard	Standard
MACHINE								
W	VEIGHT	800	823	823	832	832	853	853
	ENGTH	71.5"	71.5"	74.5"	74.5"	74.5"	74.5"	74.5"
	VIDTH VITHOUT CHUTE	46.8"	50"	50"	55"	55"	62.8"	62.8"
н	IEIGHT	42"	42"	42"	42"	42"	42"	42"
WARRANTY								
				27 1: :: 10	3 Year Limited Consumer	3 Year Limited Consumer	3 Year Limited Consumer	3 Year Limited Consumer
	INIT	3 Year Limited Consumer 1 Year Limited Commercial	3 Year Limited Consumer 1 Year Limited Commercial	3 Year Limited Consumer 1 Year Limited Commercial	1 Year Limited Commercial	1 Year Limited Commercial	1 Year Limited Commercial	1 Year Limited Commercial

2 Bag Powered Bagger, Bagger Mount Kit, Mulch Kit, Operator Controlled Chute Baffle, Discharge Cover Kit, Vacuum Baffle Kit, Lawn Striping Kit, Light Kit, Flex-Tend® Shoulder Support System, Seat Isolator kit, Seat Spring Kit, Folding ROPS Kit, Sunshade, Chrome Front Wheel Covers, Chrome Rear Wheel Covers, Hitch Kit, 48" Plug Aerator, 36" Poly Roller, 48" Dethatcher, 15 Gallon Sprayer, Tow Behind Spreader

ATTACHMENTS & ACCESSORIES

LIVE							
	PRODUCT NAME	ZT XL 42	ZT XL 42	ZT XL 52	ZT XL 52	ZT XL 60	ZT XL 60
	MODEL NUMBER	915202	915206/915238*	915200	915204/915240*	915216	915218/ 915242*
	ENGINE	Kohler® 7000 Series HD V-Twin w/ Smart Choke™	Kawasaki® FR V-Twin	Kohler® 7000 Series HD V-Twin w/ Smart Choke™	Kawasaki® FR V-Twin	Kohler® 7000 Series HD V-Twin w/ Smart Choke™	Kawasaki® FR V-Twin
	HORSEPOWER	24	21.5	25	23	26	24
	DISPLACEMENT (CC)	725	726	725	726	747	726
	DRIVE SYSTEM	Hydro-Gear® ZT-2800 Transaxles					
	FUEL CAPACITY – GALLONS (LITERS)	2.8 gallon (10.5 L)					
1	GROUND SPEED (APPROX. MPH FORWARD/REVERSE)	7 mph / 3 mph					
DECK							
	DECK MATERIAL	10 ga steel					
	DECK CONSTRUCTION	Welded	Welded	Welded	Welded	Welded	Welded
	NUMBER OF SPINDLES	3	3	3	3	3	3
	BLADE TIP SPEED (FPM)	17,000	17,000	17,000	17,000	17,000	17,000
	SPINDLE HOUSING MATERIAL	Steel	Steel	Steel	Steel	Steel	Steel
	SPINDLE SHAFT	1" Diameter Steel					
	SPINDLE BEARINGS	1" Sealed					
	DECK DRIVE	Belt	Belt	Belt	Belt	Belt	Belt
	DECK ENGAGEMENT	Electric Warner®					
	DECK LIFT SYSTEM	Foot Operated, Dial Selection					
	CUTTING WIDTH	42"	42"	52"	52"	60"	60"
	CUTTING HEIGHT	1.5"-4.5"	1.5"-4.5"	1.5"-4.5"	1.5"-4.5"	1.5"-4.5"	1.5"-4.5"
	CUTTING POSITIONS	13	13	13	13	13	13
WHEELS							
	FRONT AXLE	Fixed	Fixed	Fixed	Fixed	Fixed	Fixed
	FRONT	11 x 6-5					
1	REAR	20 x 8 - 10	20 x 8 - 10	20 x 10 - 10	20 x 10 - 10	20 x 12 - 10	20 x 12 - 10
FEATURES							
	SEAT	High Back Comfort w/ Seat Springs, Lever Adjust, Padded Arm Rests	High Back Comfort w/ Seat Springs, Lever Adjust, Padded Arm Rests	High Back Comfort w/ Seat Springs, Lever Adjust, Padded Arm Rests	High Back Comfort w/ Seat Springs, Lever Adjust, Padded Arm Rests	High Back Comfort w/ Seat Springs, Lever Adjust, Padded Arm Rests	High Back Comfort w/ Seat Springs, Lever Adjust, Padded Arm Rests
	HOUR METER	Standard	Standard	Standard	Standard	Standard	Standard
MACHINE							
	WEIGHT	661	661	679	679	694	697
	LENGTH	77.5"	77.5"	77.5"	77.5"	77.5"	77.5"
	WIDTH	54.2"	63.4"	54.2"	63.4"	73.75"	73.75"
	HEIGHT	40.9"	40.9"	40.9"	40.9"	40.9"	40.9"
WARRANTY							
	UNIT	3 Year Limited Consumer					
ı	DECK SHELL & FRAME	5 Year Limited					
ATTACHMENTS & ACCESSORIES							
	2 Bag Powered Bagger, Mulch Kit Tow Behind Spreader	t, L.E.D. Light Kit, Flex-Tend® Shou	lder Support System, Chrome F	Front Wheel Covers, Chrome Rear	Wheel Covers, 48" Plug Aerator, 36"	Poly Roller, 48" Dethatcher, 15 Ga	llon Sprayer,

* = CARB Compliant * = CARB Compliant

-	

ΤX				
	PRODUCT NAME	ZT X 42	ZT X 52	ZT X 52
	MODEL NUMBER	915172 917176*	915174	915230 915236*
	ENGINE	Kohler® 7000 Series HD V-Twin w/ Smart Choke™	Kohler® 7000 Series HD V-Twin w/ Smart Choke™	Kawasaki® FR V-Twin
	HORSEPOWER	24	25	23
	DISPLACEMENT (CC)	725	725	726
	DRIVE SYSTEM	Hydro-Gear® EZT Transaxles	Hydro-Gear® EZTTransaxles	Hydro-Gear® EZTTransaxles
	FUEL CAPACITY – GALLONS (LITERS)	2.8 gallon (10.5 L)	2.8 gallon (10.5 L)	2.8 gallon (10.5 L)
	GROUND SPEED (APPROX. MPH FORWARD/REVERSE)	7 mph / 3 mph	7 mph / 3 mph	7 mph / 3 mph
:CK				
	DECK MATERIAL	10 ga steel	10 ga steel	10 ga steel
	DECK CONSTRUCTION	Fabricated	Fabricated	Fabricated
	NUMBER OF SPINDLES	3	3	3
	BLADE TIP SPEED (FPM)	17,000	17.000	17.000
	SPINDLE HOUSING MATERIAL	Steel	Steel	Steel
	SPINDLE SHAFT	Steel	Steel	Steel
	SPINDLE BEARINGS	1" Sealed	1" Sealed	1" Sealed
	DECK DRIVE	Belt	Belt	Belt
	DECK ENGAGEMENT	Electric Warner®	Electric Warner®	Electric Warner®
	DECK LIFT SYSTEM	Foot Operated, Dial Selection	Foot Operated, Dial Selection	Foot Operated, Dial Selection
	CUTTING WIDTH	42"	52"	52"
	CUTTING HEIGHT	1.5"-4.5"	1.5"-4.5"	1.5"-4.5"
	CUTTING POSITIONS	13	13	13
HEELS				
	FRONT AXLE	Fixed	Fixed	Fixed
	FRONT	11 x 4-5	11 x 4-5	11 x 4-5
	REAR	18 x 8.5-8	18 x 8.5-8	18 x 8.5-8
ATURES				
	SEAT	High Back Comfort w/ Seat Springs, Lever Adjust, Arm Rests	High Back Comfort w/ Seat Springs, Lever Adjust, Arm Rests	High Back Comfort w/ Seat Springs, Lever Adjust, Arm Rests
	HOUR METER	Standard	Standard	Standard
ACHINE				
	WEIGHT	605	635	635
	LENGTH	77.5"	77.5"	77.5"
	WIDTH	54.2"	63.4"	63.4"
	HEIGHT	40.9"	40.9"	40.9"
ARRANTY				
	UNIT	3 Year Limited Consumer	3 Year Limited Consumer	3 Year Limited Consumer
	DECK SHELL & FRAME	5 Year Limited	5 Year Limited	5 Year Limited
TTACHMENTS ACCESSORIES				

ZI				
	PRODUCT NAME	ZT 34	ZT 42	ZT 50
	MODEL NUMBER	915210 915208*	915212 915232*	915214 915234*
	ENGINE	Kohler® 6000 V-Twin	Kohler® 7000 V-Twin	Kohler® 7000 V-Twin
	HORSEPOWER	21	22	24
	DISPLACEMENT (CC)	660	725	725
	DRIVE SYSTEM	Hydro-Gear® EZTTransaxles	Hydro-Gear® EZTTransaxles	Hydro-Gear® EZTTransaxles
	FUEL CAPACITY – GALLONS (LITERS)	2.0 gallon (7.5 L)	2.0 gallon (7.5 L)	2.0 gallon (7.5 L)
ı	GROUND SPEED (APPROX. MPH FORWARD/REVERSE)	6 mph / 3 mph	6 mph / 3 mph	6 mph / 3 mph
DECK				
	DECK MATERIAL	12 ga steel	12 ga steel	12 ga steel
	DECK CONSTRUCTION	Stamped	Stamped	Stamped
	NUMBER OF SPINDLES	2	3	3
	BLADE TIP SPEED (FPM)	17.500	17,000	17,800
	SPINDLE HOUSING MATERIAL	Steel	Steel	Steel
	SPINDLE SHAFT	Steel	Steel	Steel
	SPINDLE BEARINGS	Sealed	Sealed	Sealed
	DECK DRIVE	Belt	Belt	Belt
	DECK ENGAGEMENT	Electric Warner®	Electric Warner®	Electric Warner®
	DECK LIFT SYSTEM	Foot Operated	Foot Operated	Foot Operated
	CUTTING WIDTH	34"	42"	50"
	CUTTING HEIGHT	1.5"-4.5"	1.5"-4.5"	1.5"-4.5"
ı	CUTTING POSITIONS	7	7	7
WHEELS				
	FRONT AXLE	Fixed	Fixed	Fixed
	FRONT	11 x 4-5	11 x 4-5	11 x 4-5
	REAR	18 x 8.5-8	18 x 8.5-8	18 x 9.5-8
FEATURES				
	SEAT	Mid Back w/ Seat Springs	High Back Comfort w/ Seat Springs, Lever Adjust	High Back Comfort w/ Seat Springs, Lever Adjust
I.	HOUR METER	N/A	N/A	N/A
MACHINE				
	WEIGHT	425	440	475
	LENGTH	64"	64"	64"
	WIDTH	42"	54"	62"
ı	HEIGHT	37"	43"	43"
WARRANTY				
	UNIT	3 Year Limited Consumer	3 Year Limited Consumer	3 Year Limited Consumer
ı	DECK SHELL & FRAME	5 Year Limited	5 Year Limited	5 Year Limited
ATTACHMENTS & ACCESSORIES				
	2 Bag Non-Powered Bagger, Mul 15 Gallon Sprayer, Tow Behind Sp		Rear Wheel Covers, Hitch Kit, 48" Plug Aerator, 36" Poly Roller, 48" De	ethatcher,

* = CARB Compliant

