


In-Line Power/Data Pole Combination Kits


2-WAY IN-LINE POWER/DATA POLE COMBINATION KITS

Panel H	Model Number	List
42	P-DLPFPP242	858
50	P-DLPFPP250	860
58	P-DLPFPP258	847
66	P-DLPFPP266	841
82	P-DLPFPP282	845
98	P-DLPFPP298	850




3-WAY IN-LINE POWER/DATA POLE COMBINATION KITS

Panel H	Model Number	List
42	P-DLPFPP342	844
50	P-DLPFPP350	845
58	P-DLPFPP358	837
66	P-DLPFPP366	828
82	P-DLPFPP382	833
98	P-DLPFPP398	835



4-WAY IN-LINE POWER/DATA POLE COMBINATION KITS

Panel H	Model Number	List
42	P-DLPFPP442	692
50	P-DLPFPP450	693
58	P-DLPFPP458	684
66	P-DLPFPP466	675
82	P-DLPFPP482	679
98	P-DLPFPP498	675



END OF RUN IN-LINE POWER/DATA POLE COMBINATION KITS

Panel H	Model Number	List
42	P-DLPFPPE42	858
50	P-DLPFPPE50	860
58	P-DLPFPPE58	847
66	P-DLPFPPE66	841
82	P-DLPFPPE82	839
98	P-DLPFPPE98	850



Specify

- Paint Selection

Notes

- In-Line Power/Data Pole Combination Kits (1.619"d x 1.860"w) include one in-line power/data pole kit and one post filler kit.
- 2-way, 3-way, and end or run kits include a base shroud.
- Specify the height which corresponds to the tallest panel in the configuration.
- Available painted only.
- Designed for an 11' ceiling.

In-Line Power/Data Pole Retrofit Kits and Pole Dividers

IN-LINE POWER/DATA POLE RETROFIT KITS

Panel H	Model Number	List
42	P-DLPFPP42	543
50	P-DLPFPP50	538
58	P-DLPFPP58	515
66	P-DLPFPP66	502
82	P-DLPFPP82	470
98	P-DLPFPP98	410



IN-LINE POWER/DATA POLE DIVIDER

Panel H	Model Number	List
42	P-DVPFPPD42	276
50	P-DVPFPPD50	281
58	P-DVPFPPD58	280
66	P-DVPFPPD66	283
82	P-DVPFPPD82	286
98	P-DVPFPPD98	295



Specify

- Paint Selection

Notes

- In-Line Power/Data Pole Retrofit Kit (1.619"d x 1.860"w) mounts to the top of post fillers which are already installed at 2-way, 3-way, or 4-way connections.
- Specify the height which corresponds to the tallest panel in the configuration.
- Available painted only.
- Does not include post filler.
- Designed for an 11' ceiling.
- Channel can accommodate 52 Cat 5 cables or 46 Cat 6 cables or 36 Cat 5 cables or 32 Cat 6 cables in tandem with a ceiling infeed.


Notes

- In-Line Power/Data Pole Divider is specified when electrical cables need to be segregated from data cables by a metal barrier.

Grommet Specifications


RECTANGULAR GROMMET OPTIONS

Option	Location	List
A	No Grommets	-
B	Location 1	+38
C	Location 2	+38
D	Location 3	+38
E	Locations 2 and 3	+76
F	Locations 1, 2 and 3	+114
G	Locations 1 and 2	+76
H	Locations 1 and 3	+76




CORNER GROMMET OPTIONS

Option	Location	List
A	No Grommets	-
B	Location 1 (Default)	-
C	Location 1 and 2	+38
D	Location 1 and 3	+38
E	Locations 1, 2 and 3	+76

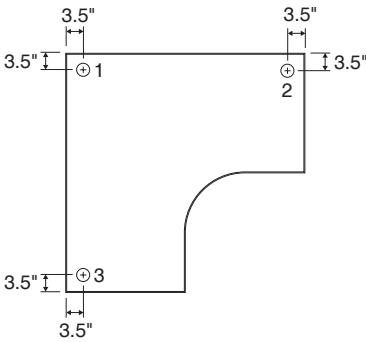

RECTANGULAR GROMMET OPTIONS

Option	Location	List
A	No Grommets	-
B	Location 1	+38




Rectangular and Curvilinear Corner Worksurfaces

24" DEEP RECTANGULAR WORKSURFACES

D	W	Model Number	List
24	24	W-WS2424	354
24	30	W-WS2430	423
24	36	W-WS2436	461
24	42	W-WS2442	501
24	48	W-WS2448	544
24	54	W-WS2454	605
24	60	W-WS2460	666
24	66	W-WS2466	758
24	72	W-WS2472	829

30" DEEP RECTANGULAR WORKSURFACES

D	W	Model Number	List
30	24	W-WS3024	423
30	30	W-WS3030	498
30	36	W-WS3036	543
30	42	W-WS3042	642
30	48	W-WS3048	696
30	54	W-WS3054	807
30	60	W-WS3060	807
30	66	W-WS3066	911
30	72	W-WS3072	991




Specify

Notes

- Laminate Selection
- Color Selection for 2mm Edge
- Additional Grommet Locations (+38)
- Grommet Cover Color (if applicable)
- Worksurface support hardware is specified separately.
- Grommet holes with covers are specified as options.
- It is highly recommended that a center support be used on all worksurfaces greater than 48" width.
- When spanning panel connections with a worksurface greater than 48" wide, an additional center cantilever is recommended for added support. Otherwise, a U-channel is recommended for additional center worksurface support.
- It is not recommended that 36", 42" and 48" deep worksurfaces be cantilevered to panels.
- If these size depths must be panel hung, it is highly recommended that an additional front support, such as a combination leg or full laminate support panel, also be specified.
- Worksurfaces have a thickness of 1 1/8".


CURVILINEAR CORNER TYPE A

D1	W1	Model Number	List
24	36	W-WSCC2436	765
30	42	W-WSCC3042	1,018



STANDARD CURVILINEAR CORNER TYPE B

D1	W1	Model Number	List
24	42	W-WSCC2442	924
24	48	W-WSCC2448	1,021
30	48	W-WSCC3048	1,164



Specify

Notes

- Laminate Selection
- Color Selection for 2mm Edge
- Additional Grommet Locations (+38)
- Grommet Cover Color (if applicable)
- Worksurface support hardware is specified separately.
- Rear corner grommet hole with cover is included.
- Additional grommet holes with covers are specified as options.
- Worksurfaces have a thickness of 1 1/8".



Divi Bullpen Surfaces

24" DEEP DIVI BULLPEN SURFACES

D	W	Number of Panels	Model Number	List
24	24 1/8	1	W-WSDV2424	380
24	30 1/8	1	W-WSDV2430	445
24	36 1/8	1	W-WSDV2436	485
24	42 1/8	1	W-WSDV2442	526
24	48 1/8	1	W-WSDV2448	567
24	54 1/4	2	W-WSDV2454	693
24	60 1/8	1	W-WSDV2460A	693
24	60 1/4	2	W-WSDV2460B	693
24	66 1/4	2	W-WSDV2466	783
24	72 1/4	2	W-WSDV2472A	850
24	72 3/8	3	W-WSDV2472B	850
24	78 1/4	2	W-WSDV2478A	911
24	78 3/8	3	W-WSDV2478B	911
24	84 1/4	2	W-WSDV2484A	972
24	84 3/8	3	W-WSDV2484B	972

30" DEEP DIVI BULLPEN SURFACES

D	W	Number of Panels	Model Number	List
30	24 1/8	1	W-WSDV3024	445
30	30 1/8	1	W-WSDV3030	524
30	36 1/8	1	W-WSDV3036	584
30	42 1/8	1	W-WSDV3042	665
30	48 1/8	1	W-WSDV3048	715
30	54 1/4	2	W-WSDV3054	835
30	60 1/8	1	W-WSDV3060A	835
30	60 1/4	2	W-WSDV3060B	835
30	66 1/4	2	W-WSDV3066	937
30	72 1/4	2	W-WSDV3072A	1,019
30	72 3/8	3	W-WSDV3072B	1,019
30	78 1/4	2	W-WSDV3078A	1,228
30	78 3/8	3	W-WSDV3078B	1,228
30	84 1/4	2	W-WSDV3084A	1,422
30	84 3/8	3	W-WSDV3084B	1,422



Specify

Notes


- Laminate Selection
- Color Selection for 2mm Edge
- Additional Grommet Locations (+38)
- Grommet Cover Color (if applicable)

- Worksurface support hardware is specified separately.
- Grommet holes with covers are specified as options.
- Bullpen Rectangular surfaces are designed to compensate for the gap created by natural panel creep for system specific (MWall or Divi) panels only.
- It is highly recommended that a center support be used on all workspaces greater than 48" wide.
- When spanning panel connections with a worksurface greater than 48" wide, an additional center cantilever is recommended for added support.
- Otherwise a U-Channel is recommended for additional center worksurface support.

Rectangular Worksurfaces for Height Adjustable Tables

RECTANGULAR WORKSURFACES FOR HEIGHT ADJUSTABLE TABLES

D¹	W¹	Model Number	List
23	46	W-WS2346	544
23	52	W-WS2352	629
23	58	W-WS2358	666
23	64	W-WS2364	758
23	70	W-WS2370	829
29	46	W-WS2946	696
29	52	W-WS2952	714
29	58	W-WS2958	807
29	64	W-WS2964	911
29	70	W-WS2970	991




Specify	Notes
<ul style="list-style-type: none"> • Laminate Selection • Color Selection for 2mm Edge • Grommet Location • Color Selection for Grommet Cover 	<ul style="list-style-type: none"> • Rectangular Worksurfaces for Height Adjustable Tables have a 1 1/8" thickness. • Height adjustable worksurface support base is specified separately. • Grommet holes with covers are specified as options. • These worksurfaces are for use with height adjustable table bases only. • Worksurfaces for Height Adjustable Tables require a 1" gap around to prevent pinch points. • See example in Product Details.


Height Adjustable Table Bases

DAY-TO-DAY ELECTRIC HEIGHT ADJUSTABLE TABLE BASES

Surface W	Surface D	Color	Model Number	List
48" - 72"	24"	Black	WFS-2L-3S24B	2,666
48" - 72"	24"	Metallic Silver	WFS-2L-3S24S	2,666
48" - 72"	24"	Satin White	WFS-2L-3S24W	2,666
48" - 72"	30"	Black	WFS-2L-3S30B	2,666
48" - 72"	30"	Metallic Silver	WFS-2L-3S30S	2,666
48" - 72"	30"	Satin White	WFS-2L-3S30W	2,666



Lowered




Raised

Notes

- 3-stage Day-to-Day Height Adjustable Table Bases allow for quick and easy adjustment of worksurface height.
- Available in black, satin white or metallic silver.
- Bases do not include worksurfaces.
- Adjusts from 21.54"H to 47.80"H (without surface).
- Tops should accommodate a 1 in (25mm) pinch clearance on all sides.
- Maximum worktop overhead allowed is 6" on one side.
- Weight capacity is 250lbs (incl. worksurface) for two leg and 350lbs (incl. work-surface) for three leg.
- Base width may be adjusted from 42"W to 72"W.
- 4 memory presets.
- Select tops to avoid cable shearing, prevent pinch points and collisions. Assure attached screens or monitor arms do not create unstable conditions.
- Local compliances should meet local requirements.

E SERIES ELECTRIC HEIGHT ADJUSTABLE TABLE BASES

Surface W	Surface D	Color	Model Number	List
42" - 72"	24"	Metallic Silver	T-RB2L2S24	2,407
42" - 72"	30"	Metallic Silver	T-RB2L2S30	2,407



Notes


- 2-stage E Series Electric Height Adjustable Table Bases on Glides allow for quick and easy adjustment of worksurface height.
- Available in metallic silver.
- Bases do not include worksurfaces.
- Adjusts from 26.26"H to 45.94"H (without surface).
- Tops should accommodate a 1 in (25mm) pinch clearance on all sides.
- Maximum worktop overhead allowed is 6" on one side.
- Weight capacity is 250lbs (incl. worksurface).
- Base width may be adjusted from 42"W to 72"W. 4 memory presets. Select tops to avoid cable shearing, prevent pinch points and collisions. Assure attached screens or monitor arms do not create unstable conditions.
- Local compliances should meet local requirements.

Panel Mounted A-Legs


DIVI PANEL MOUNTED A-LEGS					SHARED DIVI PANEL MOUNTED A-LEGS				
		Left Hand	Right Hand	List			Left Hand Shared	Right Hand Shared	List
H	D	Model Number	Model Number		H	D	Model Number	Model Number	
27	12	WFS-ALW2712DVL	WFS-ALW2712DVR	435	27	12	WFS-ALW2712DVLS	WFS-ALW2712DVRS	467
27	24	WFS-ALW2724DVL	WFS-ALW2724DVR	495	27	24	WFS-ALW2724DVLS	WFS-ALW2724DVRS	528
27	30	WFS-ALW2730DVL	WFS-ALW2730DVR	528	27	30	WFS-ALW2730DVLS	WFS-ALW2730DVRS	561




Left Hand



Right Hand



Left Hand Shared




Right Hand Shared

Specify


- Paint Selection (+25 for Grade C)

Notes


- **Important:** A-Legs cannot be used as freestanding table support. One side must be anchored to a storage element or panel.
- A-Legs are constructed from 1 x 2 painted steel.
- Legs have 1 1/2" leveling glides.
- A-Leg welded construction allows for attachment to the worksurface.
- Ships installed with panel attachment brackets. Panel locking bracket for panel attachment situations ships separate.




EXAMPLE 1 - UNSTABLE
32"H Structural Wing




EXAMPLE 2 - UNSTABLE
32"H Panel with Cantilever




EXAMPLE 3 - UNSTABLE
32"H Panel with Cantilevers



EXAMPLE 1 - STABLE
Standard Structural Wing



EXAMPLE 2 - STABLE
32"H Panel with Floor Support




EXAMPLE 3 - STABLE
32"H Panel with Panel Mounted A-Legs

N-Legs, Combination Legs and Pedestal-to-Panel Attachment Brackets

2.5 X 2.5 POST N-LEG

H	D	Model Number	List
27	24	WFS-NL22724	589
27	30	WFS-NL22730	598



Specify	Notes
---------	-------

- | | |
|-------------------|--|
| • Paint Selection | |
|-------------------|--|

PEDESTAL-TO-PANEL ATTACHMENT BRACKET

Model Number	List
S-DVPMPB	238



Specify	Notes
---------	-------

- | | |
|-------------------|---|
| • Paint Selection | <ul style="list-style-type: none"> • Pedestal-to-Panel Attachment Brackets attach structural pedestals to panels. • These brackets serve as a space filler and as a way to add stability to panels. • Pedestal to panel attachment brackets may only be used when the nominal surface depth matches the nominal pedestal depth (24" Deep surface & 24" deep pedestal or 30" deep surface and 30" deep pedestal). |
|-------------------|---|

COMBINATION SUPPORT LEGS

Model Number	List
WFS-LEG	408




Specify	Notes
---------	-------

- | | |
|--|--|
| <ul style="list-style-type: none"> • Style Selection - Black or Brushed Steel | <ul style="list-style-type: none"> • Combination Support Leg is available in black or brushed steel. • With a unique set of adapters, legs can be converted from standard peninsula legs to equal height mobile legs, extended mobile legs, nesting legs, or extended height legs. • Standard legs are sold in a kit with one 24 3/4" leg (black or brushed steel), one 2 11/16" extender and one 7/16" high glide with 1" of adjustment. • Standard legs can be converted to mobile legs and back with the same base leg unit. • Casters are ordered separately. • Extender, glide and caster are always black. • Legs ship disassembled and flat. |
|--|--|

Cantilevers, Side Support/Rear Brackets, Flat Plates and U-Channels

STANDARD CANTILEVERS

Surface Depth	Actual Depth	Hand	Model Number	List
24	18	Left	WPS-UNCT24L	94
24	18	Right	WPS-UNCT24R	94
24	18	Pair	WPS-UNCT24P	182
30	25.5	Left	WPS-UNCT30L	182
30	25.5	Right	WPS-UNCT30R	182
30	25.5	Pair	WPS-UNCT30P	361




Notes

- Standard Cantilevers provide cantilevered worksurface support from panel or wall track at either the left or right hand side of a worksurface.
- All worksurface support components fasten directly to worksurfaces with screws.
- Standard cantilevers may also be used as a center support.
- Cantilevers are painted black as a standard.
- It is highly recommended that flat plates are specified in conjunction with support cantilevers to splice two worksurfaces together at the front edge.

SHARED CANTILEVERS

Surface Depth	Actual Depth	Hand	Model Number	List
24	18	Single	WPS-UNCT24S	135
24	18	Pair	WPS-UNCT24SP	266
30	25.5	Single	WPS-UNCT30S	266
30	25.5	Pair	WPS-UNCT30SP	534




Notes

- Shared Cantilevers provide cantilevered support from panel or wall track at the seam between two worksurfaces.
- All worksurface support components fasten directly to worksurfaces with screws.
- Shared Cantilevers are painted black as a standard.
- It is highly recommended that flat plates are specified in conjunction with support cantilevers to splice two worksurfaces together at the front edge.

SIDE SUPPORT / REAR BRACKETS

Hand	Model Number	List
Left	WPS-SSSAL	69
Right	WPS-SSSAR	69
Pair	WPS-SSSA	132



Notes

- Side Support / Rear Brackets provide direct support from panel or wall track along the short side of rectangular worksurface or at rear of corner worksurface.
- All worksurface support components fasten directly to worksurfaces with screws.
- Side Support / Rear Brackets are painted black as a standard.
- Available in black only.

FLAT PLATES & U-CHANNELS

Item	Model Number	List
Flat Plate	WPS-FP	32
U-Channel	WPS-VC48	129



Notes


- Flat Plate is used to splice two worksurfaces together at front edge.
- The 3.5" x 1.5" plate has four holes per side for superior adaptability and rigidity.
- It is recommended that flat plates are also specified at the front edge helping splice the two worksurfaces together.
- Flat Plates are painted black as a standard.
- U-Channel mounts to underside of longer worksurfaces to provide bracing where center support cantilever is not possible.
- All worksurface support components fasten directly to worksurfaces with screws.
- U-Channels are painted black as a standard.

Clip Screen Product Details


Note: AIS Screens are designed to be easily installed in most industry standard situations, however, it is the responsibility of the dealer to understand the installation methods required as well as limitations of the situation or product that you intend to install on.

Screen installation instructions can be found at : <https://www.ais-inc.com/resources/installation-instructions>

The following information only pertains to AIS product.

Clip Screen Product Details

1/4" Clear Glass



3/8" Clear Glass

- Available in 1/4" clear glass and 3/8" clear glass.
- Screens come with all necessary mounting hardware (clips, channel, feet, brackets, etc) at prices shown.
- Clip dimensions: 2 1/8" H , 2 1/3" W and 1 1/2" D.
- Screens mounted to surfaces will receive 2 clips for surfaces 24" – 54" wide, 3 clips for surfaces 60" – 72" wide and 4 clips for surfaces 78" – 84" wide.
- Surface Mount screens screw directly to top of panels.
- Divi specific Panel Top Screens can only be applied to Divi product. For Panel Top Screens that can be used with other systems, please see the Clear & PET Screens price list.
- Standard in Metallic Silver.

Glass Material

- AIS Glass is standard with polished edges and straight corners.
- AIS Glass is standard tempered glass with standard iron content. Request samples from literature center.
- Standard products for glass are always clear unless noted otherwise, other colors may be available upon special request (upcharges apply).
- Glass is easily cleaned with common janitorial supplies.
- 1/4" Glass weighs 2.88 lbs per square foot.
- 3/8" Glass weighs 4.32 lbs per square foot

Glass 1/4" Panel Top Surface Mount Clip Screens


Material	Where Used	Screen Type	Sized For	Mount Type
Lexan 1/4"	Panel Top	Channel	Divi Panel Dimensions	Surface Mount
Lexan 3/8"		Clip		
Glass 1/4"		Lite		
Glass 3/8"				

GLASS 1/4" PANEL TOP SURFACE MOUNT
CLIP SCREENS (DIVI SPECIFIC)


H	W	Model Number	List
12	24	Y-3P3B1U1224B	529
12	30	Y-3P3B1U1230B	542
12	36	Y-3P3B1U1236B	549
12	42	Y-3P3B1U1242B	578
12	48	Y-3P3B1U1248B	607
12	54	Y-3P3B1U1254B	619
12	60	Y-3P3B1U1260B	666
12	66	Y-3P3B1U1266B	695
12	72	Y-3P3B1U1272B	724
12	78	Y-3P3B1U1278B	753
12	84	Y-3P3B1U1284B	779
16	24	Y-3P3B1U1624B	616
16	30	Y-3P3B1U1630B	659
16	36	Y-3P3B1U1636B	695
16	42	Y-3P3B1U1642B	756
16	48	Y-3P3B1U1648B	789
16	54	Y-3P3B1U1654B	840
16	60	Y-3P3B1U1660B	887
16	66	Y-3P3B1U1666B	899
16	72	Y-3P3B1U1672B	920
16	78	Y-3P3B1U1678B	937
16	84	Y-3P3B1U1684B	954

GLASS 1/4" PANEL TOP SURFACE MOUNT
CLIP SCREENS (DIVI SPECIFIC)


H	W	Model Number	List
20	24	Y-3P3B1U2024B	661
20	30	Y-3P3B1U2030B	687
20	36	Y-3P3B1U2036B	727
20	42	Y-3P3B1U2042B	765
20	48	Y-3P3B1U2048B	816
20	54	Y-3P3B1U2054B	869
20	60	Y-3P3B1U2060B	922
20	66	Y-3P3B1U2066B	975
20	72	Y-3P3B1U2072B	1,028
20	78	Y-3P3B1U2078B	1,082
20	84	Y-3P3B1U2084B	1,133




24 - 54 Wide




60 - 72 Wide



78 - 84 Wide



On Panel Top



Surface Mount Clip

Specify

- Paint Selection

Notes

- For use with Divi only. See Clear & PET Screens price list for Panel Top Screens that can be used on non-Divi panels.
- Clips available in Metallic Silver only.
- Standard products for glass are always clear unless noted otherwise, other colors may be available upon special request (upcharges apply).

Glass 3/8" Panel Top Surface Mount Clip Screens


Material	Where Used	Screen Type	Sized For	Mount Type
Lexan 1/4"	Panel Top	Channel	Divi Panel Dimensions	Surface Mount
Lexan 3/8"		Clip		
Glass 1/4"		Lite		
Glass 3/8"				

GLASS 3/8" PANEL TOP SURFACE MOUNT
CLIP SCREENS (DIVI SPECIFIC)


H	W	Model Number	List
12	24	Y-4P3B1U1224B	718
12	30	Y-4P3B1U1230B	722
12	36	Y-4P3B1U1236B	786
12	42	Y-4P3B1U1242B	848
12	48	Y-4P3B1U1248B	914
12	54	Y-4P3B1U1254B	979
12	60	Y-4P3B1U1260B	1,045
12	66	Y-4P3B1U1266B	1,109
12	72	Y-4P3B1U1272B	1,173
12	78	Y-4P3B1U1278B	1,239
12	84	Y-4P3B1U1284B	1,304
16	24	Y-4P3B1U1624B	684
16	30	Y-4P3B1U1630B	764
16	36	Y-4P3B1U1636B	801
16	42	Y-4P3B1U1642B	891
16	48	Y-4P3B1U1648B	988
16	54	Y-4P3B1U1654B	1,056
16	60	Y-4P3B1U1660B	1,087
16	66	Y-4P3B1U1666B	1,184
16	72	Y-4P3B1U1672B	1,258
16	78	Y-4P3B1U1678B	1,280
16	84	Y-4P3B1U1684B	1,344

GLASS 3/8" PANEL TOP SURFACE MOUNT
CLIP SCREENS (DIVI SPECIFIC)


H	W	Model Number	List
20	24	Y-4P3B1U2024B	780
20	30	Y-4P3B1U2030B	884
20	36	Y-4P3B1U2036B	984
20	42	Y-4P3B1U2042B	1,086
20	48	Y-4P3B1U2048B	1,184
20	54	Y-4P3B1U2054B	1,287
20	60	Y-4P3B1U2060B	1,387
20	66	Y-4P3B1U2066B	1,489
20	72	Y-4P3B1U2072B	1,587
20	78	Y-4P3B1U2078B	1,687
20	84	Y-4P3B1U2084B	1,788




24 - 54 Wide




60 - 72 Wide



78 - 84 Wide



On Panel Top



Surface Mount Clip

Specify

- Paint Selection


Notes

- For use with Divi only. See Clear & PET Screens price list for Panel Top Screens that can be used on non-Divi panels.
- Clips available in Metallic Silver only.
- Standard products for glass are always clear unless noted otherwise, other colors may be available upon special request (upcharges apply).

Mid-Height Shelf and Flipper Doors Units

LINEAR MID-HEIGHT SHELF UNITS

H	W	D	Model Number	List
7.75	30	12	S-SHFLDV30	315
7.75	36	12	S-SHFLDV36	326
7.75	42	12	S-SHFLDV42	345
7.75	48	12	S-SHFLDV48	382
7.75	60	12	S-SHFLDV60	402



Specify


- Paint Selection

Notes

- Linear Mid-Height Shelf Units provide low profile overhead storage.
- Shelf ends have locking swing cams to prevent dislodgement.
- Shelf bottom will receive task lights.
- Unit includes two Linear Mid-height shelf ends, one shelf pan, and mounting hardware.
- Order shelf unit that corresponds to panel width.

METAL / FABRIC DOOR FRONT TYPE C FLIPPER DOOR UNIT

Interior H	W	Interior D	Model Number	List
14.25	30	12	S-FDUDV30	801
14.25	36	12	S-FDUDV36	828
14.25	42	12	S-FDUDV42	844
14.25	48	12	S-FDUDV48	899
14.25	60	12	S-FDUDV60	1,089



Specify

- Paint Selection


Notes

- Type C Flipper Door Unit - Metal Door Front provides binder height, lockable overhead storage.
- Door opens and stores above top cover pan.
- Flipper unit has an open back.
- Shelf ends have locking swing cams to prevent dislodgement.
- Shelf bottom will receive task lights.
- All flipper doors are lockable with two supplied keys.
- Order flipper unit that corresponds to panel width.

Task Lights and Task Light Cord Managers

OVERHEAD LED TASK LIGHTS

Length	Model Number	List
24	A-LEDTL-61024	511
40	A-LEDTL-61540	758



Notes

- LED task lights are 1-1/4" wide, and 3/8" in thickness and come in 24 and 40 inch lengths.
- Brushed aluminum with black trim.
- Attachable to the underside of overhead cabinet via the built-in magnets, or mounted to non-metal surfaces using the adjustable mounting bracket.
- Feature 100 lm/w with warm white and white color temps and convenient one-touch On/Off and Touch-and-Hold dimmer.
- Power-in and power-switch are reversible.
- Power cord is 10' in length.

TASK LIGHT CORD MANAGERS

H	Model Number	List
3	A-DVVWMTL03	58
11	A-DVVWMTL11	67
16	A-DVVWMTL16	81




Notes

- Task Light Cord Managers engage to panel hanger frame slots.
- Managers are available in three heights: 3", 11" and 16".
- Use 16" to achieve a full height finished aesthetic for managing task light cords under full height shelves, flipper doors, or under half height shelves hung level with full height shelves on 65"/66"/67" high panels.
- Use 11" to achieve a full height finished aesthetic for managing task light cords under half height shelves on 50" high panels.
- Use 3" for managing cords above tackboards or double them up for any of the above situations when a full height manager is not required.
- Task Light cord managers are black only to match task light cords and are non-handed for use on either the left or right side of a panel.
- Hanger frames can accommodate only one task light cord manager and will not fit behind tackboards.
- Cord managers are painted black as standard.

Monitor Arms

SINGLE MONITOR ARM

Model Number	List
A-ERSMASB	805




Notes

- Suitable for 10" - 28" size range LCD screens.
- Load capacity of 19lbs per arm.
- Features 180 degree rotation at the mounting base and extension.
- VESA monitor mount for 75mm and 100mm standard.
- Available mounting options include c-clamp, grommet or bolt through.
- Available in silver only.
- Single monitor arm features a snap-in/removable cord clip for wire management.

DUAL MONITOR ARM

Model Number	List
A-ERDMASB	1,479




Notes

- Suitable for 10" - 28" size range LCD screens.
- Load capacity of 19lbs per arm.
- Features 180 degree rotation at the mounting base and extension.
- VESA monitor mount for 75mm and 100mm standard.
- Available mounting options include c-clamp, grommet or bolt through.
- Available in silver only.
- Single monitor arm features a snap-in/removable cord clip for wire management.

DUAL MONITOR ARM FOR SHALLOW DEPTH WORKSURFACES

Model Number	List
A-ERDMAM9	1,479




Notes

- Suitable for LCD screens up to 27".
- Load capacity of 14.3 lbs. per monitor.
- Features 180 degree rotation at the mounting base and extension.
- Monitors mount with M4 screws to a VESA bracket.
- VESA monitor mount for 75mm and 100mm standard.
- Mounts with c-clamp on the table edge or through a grommet hole.
- Available in silver only.

Keyboard Arms, Mouse Trays, Pencil Drawers and Anti-Fatigue Mats

STANDARD EXTENDED KEYBOARD ARM

Model Number	List
A-KEYBZE	1,032




Notes

- Keyboard Arm / Trays mount to underside of worksurfaces to support standard computer keyboards.
- Keyboard platform area behind wrist rest measures 8 1/2" deep x 20" wide.
- All keyboard trays include a factory mounted, synthetic leather wrist rest.

STANDARD MOUSE TRAY

Model Number	List
A-MSETS	182




Notes

- Mouse Tray mounts to either the left or right side of keyboard tray platform with screws to service both left and right handed users.
- Mouse tray has standard mouse pad surface and requires no additional mouse pad.
- Mouse area measures 7 1/4" x 7 1/4".
- Mouse tray swivels around vertical axis 270° and has 30° of tilt around the horizontal axis (15° above keyboard tray plane to 15° below plane, independent of keyboard tray tilt).
- Order mouse tray separately.

PENCIL DRAWER

H	W	D	Model Number	List
2 1/4	21 1/4	16 1/4	A-PDRWP	265




Notes

- Pencil Drawer provides convenient, low profile storage of loose items.
- Constructed of rigid, durable PVC with black textured finish.
- Plastic slides mount underneath worksurfaces with screws provided.
- Pencil drawer measures 16 1/4" deep x 21 1/4" wide x 2 1/4" high.
- Note: Plan pencil drawer location around worksurface support elements.

Tackboards, Lock Cores and Keys

TACKBOARDS			
H	W	Model Number	List
12	24	A-TACKDV1224	255
12	30	A-TACKDV1230	270
12	36	A-TACKDV1236	282
12	42	A-TACKDV1242	296
12	48	A-TACKDV1248	316
12	60	A-TACKDV1260	412
15	24	A-TACKDV1524	260
15	30	A-TACKDV1530	277
15	36	A-TACKDV1536	286
15	42	A-TACKDV1542	306
15	48	A-TACKDV1548	321
15	60	A-TACKDV1560	422
19	24	A-TACKDV1924	332
19	30	A-TACKDV1930	354
19	36	A-TACKDV1936	370
19	42	A-TACKDV1942	390
19	48	A-TACKDV1948	412
19	60	A-TACKDV1960	441




Specify

- Fabric Selection

Notes

- Tackboards are 7/8" thick and mount to wall track to provide vertical tackable surface for wall track applications and private offices.
- Tackboards are available in three different heights.

LOCK CORES AND KEYS		
Key Type	Model Number	List
Core with 2 keys	S-W1CORE1	20
Core with 2 keys (set of 2 keyed alike)	S-W1CORE2	32
Core with 2 keys (set of 3 keyed alike)	S-W1CORE3	49
Core with 2 keys (set of 4 keyed alike)	S-W1CORE4	63
Core with 2 keys (set of 5 keyed alike)	S-W1CORE5	79
Core with 2 keys (set of 6 keyed alike)	S-W1CORE6	92
Core with 2 keys (set of 7 keyed alike)	S-W1CORE7	107
Core with 2 keys (set of 8 keyed alike)	S-W1CORE8	124
Core with 2 keys (set of 9 keyed alike)	S-W1CORE9	138
Core with 2 keys (set of 10 keyed alike)	S-W1CORE10	153
Master Key	RS-W1MKEY	15
Core Removal Key	RS-W1CRKEY	15
Replacement Key	RS-WK _ _ _ (Key Number)	22



Notes

- Lock Cores & Keys are included with all AIS storage files and overhead flipper units, but may be ordered separately for keying stations alike or for replacement purposes.
- Keys and Lock Cores are available in #'s 226 through 425.
- When ordering keyed alike sets, be sure to also order an LL core removal key.
- The core removal key is needed to remove the existing core from the lock housing in order to replace with a new core.
- Order sets based on quantity of storage items to be keyed alike.



National Showrooms:

Leominster

AIS Headquarters
25 Tucker Drive
Leominster, MA 01453

Chicago

The Merchandise Mart
Suite 1086
Chicago, Illinois 60654

New York

AIS New York
257 Park Avenue South
New York, New York 10010

Washington, D.C.

AIS Washington, D.C.
1501 M St, NW, STE 230
Washington, D.C. 20005

GSA Sales

GSA Contract 47QSM20D08Q4
Multiple Award Schedule (MAS)
Large Category: Furniture & Furnishings
Subcategories: Office Furniture, Packaged
Office Furniture and Furniture Services

For additional information on AIS:

Dealer Showrooms, Representative
Directory, Project Case Studies, Online
Catalog & Product Showcase
Visit: **www.ais-inc.com**