

# MWALL

**March 2023 Price List**

**AIS**

**PRODUCT INFORMATION**

|                                   |   |
|-----------------------------------|---|
| MWall Statement of Line . . . . . | 4 |
| MWall Finish Options . . . . .    | 7 |

**PANELS**

|                                                                       |    |
|-----------------------------------------------------------------------|----|
| MWall Panels Product Details. . . . .                                 | 9  |
| Hard Surface Non-Raceway Panels . . . . .                             | 14 |
| Tackable Acoustical Surface Non-Raceway Panels . . . . .              | 15 |
| Non-Powered Hard Surface Panels. . . . .                              | 16 |
| Powered Hard Surface Panels . . . . .                                 | 17 |
| Non-Powered Tackable Acoustical Surface Panels. . . . .               | 18 |
| Powered Tackable Acoustical Surface Panels . . . . .                  | 19 |
| Non-Powered Beltline Only Z-Panels. . . . .                           | 20 |
| Powered Beltline Only Z-Panels . . . . .                              | 21 |
| Non-Powered Base / Non-Powered Beltline Dual Raceway Z-Panel. . . . . | 22 |
| Powered Base / Non-Powered Beltline Dual Raceway Z-Panels. . . . .    | 23 |
| Non-Powered Base / Powered Beltline Dual Raceway Z-Panels. . . . .    | 24 |
| Powered Base / Powered Beltline Dual Raceway Z-Panels . . . . .       | 25 |
| Non-Powered Quarter Glass Panels . . . . .                            | 26 |
| Powered Quarter Glass Panels . . . . .                                | 27 |
| Non-Powered Half Glass Panels . . . . .                               | 28 |
| Powered Half Glass Panels . . . . .                                   | 29 |
| Non-Powered Air Flow / Wall Access Panels . . . . .                   | 30 |
| Powered Air Flow / Wall Access Panels . . . . .                       | 31 |
| ADA Door Panels . . . . .                                             | 32 |
| Linear Sliding Privacy Screens . . . . .                              | 33 |
| Linear Sliding Privacy Screen Handles and Brackets. . . . .           | 34 |

**CONNECTORS**

|                                                                                |    |
|--------------------------------------------------------------------------------|----|
| Corner and Straight HiLo Kits. . . . .                                         | 35 |
| Porkchop and Wall Mount Kits . . . . .                                         | 36 |
| Equal Height Post Fillers . . . . .                                            | 37 |
| Unequal Height Post Fillers . . . . .                                          | 38 |
| Unequal Height Post Fillers . . . . .                                          | 39 |
| Unequal Height Post Fillers . . . . .                                          | 40 |
| Unequal Height Post Fillers, End of Run Post Fillers and Wall Tracks . . . . . | 41 |
| Base Raceway Shrouds, Topcap Raceway Shrouds . . . . .                         | 42 |

**ELECTRICAL**

|                                                               |    |
|---------------------------------------------------------------|----|
| MWall Electrical Product Details . . . . .                    | 43 |
| Panel-to-Panel and Lateral Jumpers . . . . .                  | 47 |
| Duplex Outlets . . . . .                                      | 48 |
| Side Mounted, Receptacle Mount and Ceiling In-Feeds . . . . . | 50 |
| Pole Kits. . . . .                                            | 51 |
| Dataport Boxes and Retrofit Kits . . . . .                    | 52 |
| Junction Boxes and Data Plate Kits . . . . .                  | 53 |

**SUPPORT**

|                                                      |    |
|------------------------------------------------------|----|
| Cantilevers and Side Support/Rear Brackets . . . . . | 54 |
| End Panels and Brackets . . . . .                    | 55 |
| MWall Panel Mounted A-Legs . . . . .                 | 56 |
| MWall Panel Mounted O-Legs . . . . .                 | 57 |

STORAGE

Mid-Height Shelf Units . . . . . 58

Mid-Height Corner Shelf Units . . . . . 59

Type C Flipper Door Units. . . . . 60

Type C Raised Flipper Door Units . . . . . 61

Type D Flipper and Raised Flipper Door Units . . . . . 62

Sliding Door Units. . . . . 63

Raised Sliding Door Units. . . . . 64

Cabinet Door Units . . . . . 65

Raised Cabinet Door Units . . . . . 66

ACCESSORIES

Tackboards, Tool Rail Kits and Panel Coat Hooks . . . . . 67

Whiteboards. . . . . 68

WARRANTY & TERMS AND CONDITIONS

For Warranty & Terms and Conditions please visit:  
<https://aiscmsprod.blob.core.windows.net/infocenter/AISTermsWarranty.pdf>

Panels and Connectors

MWALL

PANELS



Hard Surface  
Non-Raceway Panels



Tackable Acoustical  
Surface Non-Raceway Panels




Hard Surface Panels  
Powered or Non-Powered



Tackable Acoustical Surface Panels  
Powered or Non-Powered




Beltline Only Z-Panels  
Powered or Non-Powered




Dual Raceway Z-Panels  
Powered or Non-Powered




Quarter Glass Panels  
Powered or Non-Powered



Half Glass Panels  
Powered or Non-Powered




Air Flow / Wall Access Panels  
Powered or Non-Powered




ADA Door Panels  
With or Without Glass, Left or Right Hand  
Without Glass Right Hand Door Shown



66" High MWall Linear Sliding  
Privacy Screen



80" High MWall Linear Sliding  
Privacy Screen




Linear Sliding Door Handle


CONNECTORS




Universal Corner HiLo Kits




Universal Straight HiLo Kits



Standard Corner HiLo Kits



Standard Straight HiLo Kits




Porkchop Kits



Wall Mount Kits



2-Way Equal Height Post Filler




3-Way Equal Height Post Filler



4-Way Equal Height Post Filler



2-Way Unequal  
Height Post Filler



3-Way Unequal  
Height Post Filler




4-Way Unequal  
Height Post Filler

Connectors, Electrical and Support


CONNECTORS




End of Run Post Filler




Wall Track




2-Way Base Raceway Shroud



3-Way Base Raceway Shroud




2-Way Topcap Raceway Shroud




3-Way Topcap Raceway Shroud


ELECTRICAL




Panel-to-Panel Jumpers




Lateral Pass Through Jumpers




Duplex Outlets




USB Outlets




Duplex Outlet Hole Covers




Side Mounted Base In-Feed




Receptacle Mount Base In-Feed



Ceiling In-Feeds




In-Line Power / Data Pole Kits




Double Channel Power / Data Pole Kit




In-Line Pole Extension Kits




Dataport Boxes w/  
Vertical Wire Manager



Electrical Retrofit Kits




Hardwire Junction Box




Data Plate Kits


SUPPORT




Standard Cantilevers




Shared Cantilevers




Side / Support Rear Brackets



Panel Mounted Shelf Cantilevers




Standard End Panels




Clear Access End Panels




Pedestal-to-Pedestal  
Attachment Brackets



Countertop Brackets




Panel Mounted A-Legs




Panel Mounted O-Legs

Storage and Accessories


STORAGE



Mid-Height Shelf Units




Linear Mid-Height Shelf Units




Mid-Height Corner Shelf Unit




Linear Mid-Height  
Corner Shelf Unit




Type C Flipper Door Unit  
Metal/Fabric or Laminate Front  
*Metal/Fabric Door Front Shown*




Type C Raised Flipper Door Unit  
Metal/Fabric or Laminate Front  
*Metal/Fabric Door Front Shown*




Type D Flipper Door Unit




Type D Raised  
Flipper Door Unit




Sliding Door Unit  
Metal/Fabric or Laminate Front  
*Metal/Fabric Door Front Shown*



Raised Sliding Door Unit  
Metal/Fabric or Laminate Front  
*Metal/Fabric Door Front Shown*




Cabinet Door Unit  
Metal/Fabric or Laminate Front  
*Metal/Fabric Door Front Shown*




Raised Cabinet Door Unit  
Metal/Fabric or Laminate Front  
*Metal/Fabric Door Front Shown*


ACCESSORIES




Tackboards



Tool Rail Kits



Tool Rail Kits



White Board w/ Marker Tray  
Frameless

## VERTICAL SURFACE FABRICS

| Name         | Grade |
|--------------|-------|
| Amaze        | A     |
| Avenue       | A     |
| Cape Cod     | A     |
| Engage       | A     |
| Mirador      | A     |
| New England  | A     |
| Rainfall     | A     |
| Simplicity   | A     |
| Theory       | A     |
| Twizzle      | A     |
| Lido         | B     |
| Marin        | B     |
| Nature       | B     |
| Off the Grid | B     |
| Purpose      | B     |
| Spinel       | B     |
| Sprite       | B     |

**Note:** 66" & 72" wide screens – if applying directional fabrics they will need to be railroaded for application. If using a COM fabric that is 54" wide, any screen over 48" wide would need to have the fabric railroaded as well.

**C.O.M. Fabric Policy**

- It is mandatory that you work directly with your AIS Customer Service Representative for all COM related testing and orders. They will provide all necessary forms to you, as well as work with you with regard to sending in correct yardage and where to send it, along with necessary RA# or #s. Please note an RA must be submitted along with the fabric for testing, as well as an RA created for an actual order.
- Please Note: A three to five yard sample is required for testing and approval for use on all monolithic panel systems. A one yard sample is required for testing and approval on Divi Insert Tiles, Matrix Tiles, flipper doors and tackboards. We may be able to test upholstery fabrics with a swatch, your Customer Service Representative will advise based on the fabric being tested; otherwise a 1 yard sample must be submitted for testing. Results take 48 - 72 hours.
- Customer Service must be advised as to the width of the fabric rolls being supplied (54"W or 60"W). Customer Service must also be advised if the fabric has a backer.
- Yardage required for the job must be calculated by an AIS Customer Service Rep.
- Once AIS has approved the COM fabric, a fabric sample needs to be marked by the dealer with "Front", "Top", and "Bottom", to be sure fabric is applied correctly. The fabric sample then needs to be attached to a COM Fabric Dealer Form and forwarded to AIS Customer Service. [The COM Fabric Dealer Form may be downloaded or printed here.](#)
- Fabrics may be discontinued or obsolete without notice.
- Contact AIS Customer Service with any questions regarding fabric availability.
- All directional fabric will be railroaded.

## Paint, Laminate and Tempered Glass Options

## MWALL PAINT OPTIONS

| Name                | Color Code | Grade |
|---------------------|------------|-------|
| Black               | BK         | A     |
| Chalk               | CK         | A     |
| Dark Tone           | DT         | A     |
| Grey Value 1        | GV1        | A     |
| Innertone           | HT         | A     |
| Light Tone          | LT         | A     |
| Medium Tone         | MT         | A     |
| Metallic Silver     | MS         | A     |
| Satin White         | SW         | A     |
| Warm Brown          | WB         | A     |
| Champagne Metallic  | CHM        | B     |
| Dark Grey Metallic  | DGM        | B     |
| Flint Grey Metallic | FGM        | B     |
| Light Grey          | LG         | B     |
| Tan Value 1         | TV1        | B     |
| Antique Gold        | AG         | C     |
| Graphite Sky        | GS         | C     |
| Burnt Orange        | BO         | C     |
| Brown               | BR         | C     |
| Steel Blue          | SB         | C     |
| Baltic Blue         | BB         | C     |
| Ruby Red            | RR         | C     |
| Kelly Green         | KG         | C     |

## MWALL LAMINATE OPTIONS

| Name             | Grade |
|------------------|-------|
| Absolute Acajou  | B     |
| Aimtoo Savatre   | B     |
| Black            | B     |
| Brazilwood       | B     |
| Chalk            | B     |
| Corporate Walnut | B     |
| Dark Rum Cherry  | B     |
| Field Elm        | B     |
| Grand Cherry     | B     |
| Grey Elm         | B     |
| Landmark         | B     |
| Leave Likatre    | B     |
| Linen            | B     |
| Looks Likatre    | B     |
| Maritime Dune    | B     |
| Midwest Maple    | B     |
| Neo Walnut       | B     |
| Phantom Ecu      | B     |
| Phantom Pearl    | B     |
| Storm            | B     |
| Summer Drops     | B     |
| Titanium EV      | B     |
| True White       | B     |
| Trytoo Savatre   | B     |
| White Chocolate  | B     |

## Custom Paints

- Minimum order size for any custom color is \$75,000 list. Extended lead-time will apply.
- Any color not shown on Quick Ship, Standard Grade A, B or C will be considered custom.
- A \$450 net paint match fee will be assessed following receipt of (2) 5"x5" samples of paint being matched.
- Minimum order size for any custom color is \$75,000.00 list. Extended lead-time will apply.
- Additionally, Grade C paint up-charges will be applied to all applicable products on the order.
- Important Custom Paint Note: Most paint match pricing can be covered by the Grade C up-charge in the catalog, however the final pricing can only be determined after the paint is matched and a product list is provided to AIS customer service. An additional fee may apply based on job size and paint color.

## TEMPERED GLASS OPTIONS


| Name        | Panels/Frame/Tiles/<br>Screens | 1/4" Thick<br>Frameless Glass | 3/8" Thick<br>Frameless Glass |
|-------------|--------------------------------|-------------------------------|-------------------------------|
| Clear       | Y                              | Y                             | Y                             |
| Frosted     | Y                              | Y                             | Y                             |
| Bronze Tint | Y                              | Y                             | N                             |
| Grey Tint   | Y                              | Y                             | N                             |

All glass is tempered. The etched side of Frosted is always on Side A of the Frame or Panel. Side B of this glass options are smooth. Please see specific price list pages on each type of glass for list pricing and up-charges.

MWall Panels Product Details


**Product Detail 1**  
**Panel Statement of Line**

Fabric Covered, Hard Surface, Non-Raceway

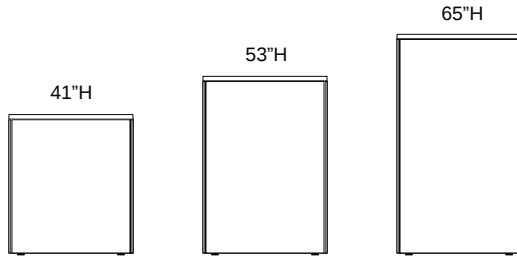


Heights:  
Nominal Heights: 41", 53", 65"  
Actual Minimum Heights: 41 1/4", 52 3/8", 64 11/16" - Leveling Glide Range is 1 1/2"  
Widths:  
Nominal Widths: 18", 24", 30", 36", 42", 48", 60"  
Actual Widths: 18 5/16", 24 5/16", 30 5/16", 36 5/16", 42 5/16", 48 5/16", 60 5/8"

Fabric Covered, Tackable Acoustical Surface, Non-Raceway



Heights:  
Nominal Heights: 41", 53"  
Actual Minimum Heights: 52 3/8", 64 11/16" - Leveling Glide Range is 1 1/2"  
Widths:  
Nominal Widths: 18", 24", 30", 36", 42", 48", 60"  
Actual Widths: 18 5/16", 24 5/16", 30 5/16", 36 5/16", 42 5/16", 48 5/16", 60 5/8"

Fabric Covered, Hard Surface, Powered/Non-Powered

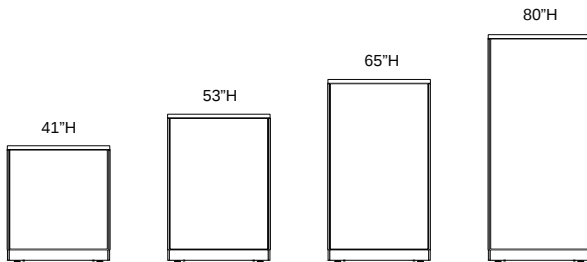

Heights:  
Nominal Heights: 41", 53", 65", 80"  
Actual Minimum Heights: 41 1/4", 52 3/8", 64 11/16", 80 1/2" - Leveling Glide Range is 1 1/2"  
Widths:  
Nominal Widths: 18", 24", 30", 36", 42", 48", 60"  
Actual Widths: 18 5/16", 24 5/16", 30 5/16", 36 5/16", 42 5/16", 48 5/16", 60 5/8"

\*Available in Non-Powered only.


Fabric Covered, Tackable Acoustical Surface, Powered/Non-Powered



Heights:  
Nominal Heights: 53", 65", 80"  
Actual Minimum Heights: 52 3/8", 64 11/16", 80 1/2" - Leveling Glide Range is 1 1/2"  
Widths:  
Nominal Widths: 18", 24", 30", 36", 42", 48", 60"  
Actual Widths: 18 5/16", 24 5/16", 30 5/16", 36 5/16", 42 5/16", 48 5/16", 60 5/8"


\*Available in Non-Powered only.

Z-Panel, Beltline Raceway Only, Powered/Non-Powered

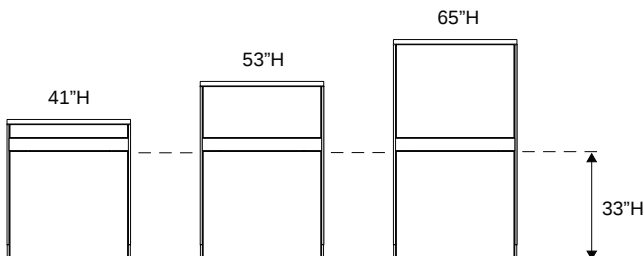

Heights:  
Nominal Heights: 41", 53", 65"  
Actual Minimum Heights: 41 1/4", 52 3/8", 64 11/16" - Leveling Glide Range is 1 1/2"  
Widths:  
Nominal Widths: 24", 30", 36", 42", 48", 60"  
Actual Widths: 24 5/16", 30 5/16", 36 5/16", 42 5/16", 48 5/16", 60 5/8"

Z-Panel, Dual Raceway

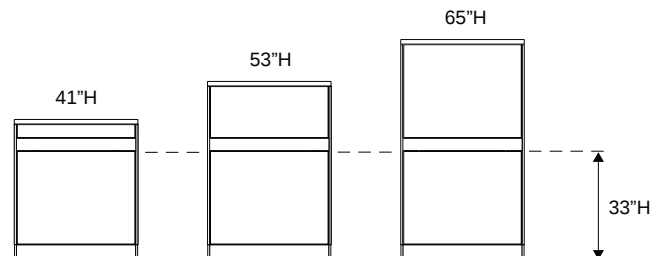


Heights:  
Nominal Heights: 41", 53", 65"  
Actual Minimum Heights: 41 1/4", 52 3/8", 64 11/16" - Leveling Glide Range is 1 1/2"  
Widths:  
Nominal Widths: 24", 30", 36", 42", 48", 60"  
Actual Widths: 24 5/16", 30 5/16", 36 5/16", 42 5/16", 48 5/16", 60 5/8"

## MWall Panels Product Details

### Product Detail 2

#### Panel Statement of Line

Quarter Glass, Fabric Covered, Hard Surface, Powered/Non-Powered

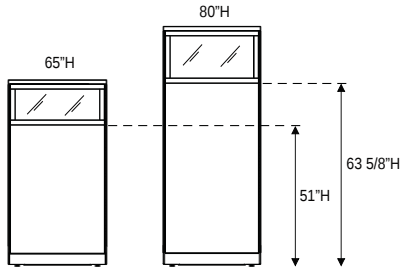

#### Heights:

Nominal Heights: 65", 80"


Actual Minimum Heights: 64 <sup>11</sup>/<sub>16</sub>", 80 <sup>1</sup>/<sub>2</sub>" - Leveling Glide Range is 1 <sup>1</sup>/<sub>2</sub>"

#### Widths:

Nominal Widths: 24", 30", 36", 42", 48"

Actual Widths: 24 <sup>5</sup>/<sub>16</sub>", 30 <sup>5</sup>/<sub>16</sub>", 36 <sup>5</sup>/<sub>16</sub>", 42 <sup>5</sup>/<sub>16</sub>", 48 <sup>5</sup>/<sub>16</sub>"

Half Glass, Fabric Covered, Hard Surface, Powered/Non-Powered

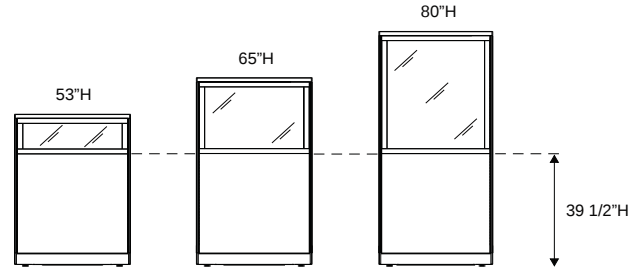

#### Heights:

Nominal Heights: 53", 65", 80"


Actual Minimum Heights: 52 <sup>3</sup>/<sub>8</sub>", 64 <sup>11</sup>/<sub>16</sub>", 80 <sup>1</sup>/<sub>2</sub>" - Leveling Glide Range is 1 <sup>1</sup>/<sub>2</sub>"

#### Widths:

Nominal Widths: 24", 30", 36", 42", 48", 60"

Actual Widths: 24 <sup>5</sup>/<sub>16</sub>", 30 <sup>5</sup>/<sub>16</sub>", 36 <sup>5</sup>/<sub>16</sub>", 42 <sup>5</sup>/<sub>16</sub>", 48 <sup>5</sup>/<sub>16</sub>"

ADA Door Panel



#### Heights:

Nominal Heights: 80"

Actual Minimum Heights: 80 <sup>1</sup>/<sub>2</sub>" - Leveling Glide Range is 1 <sup>1</sup>/<sub>2</sub>"

#### Widths:

Nominal Widths: 42"

Actual Widths: 42 <sup>5</sup>/<sub>16</sub>"


## MWall Panels Product Details

### Product Detail 3


#### Panel Details and Specifications

MWall panels may be ordered with numerous raceway configurations, including non-raceway (not shown). Beltline and base raceways can be configured for electrical receptacles, electrical pass through, data and telecommunications interface, as well as data and telecommunications pass through. Topcap raceway is utilized for data and telecommunications only.


MWall Raceway Minimum Cross-Section Dimensions:




Topcap Raceway 1 <sup>1</sup>/<sub>8</sub>" x 1 <sup>1</sup>/<sub>4</sub>" data only. Data cable capacity 20 cables .2" diameter.




Beltline Raceway 1" x 3.5" for data and electrical. Data cable capacity 56 cables .2" diameter.




Base Raceway 1 <sup>3</sup>/<sub>8</sub>" x 3 <sup>5</sup>/<sub>8</sub>" for data and electrical. Data cable capacity 56 cables .2" diameter.



MWall Base Raceway - Powered shown on left, non-powered shown on right.



Z-Panel Beltline Only Raceway - Powered shown on left, non-powered shown on right.

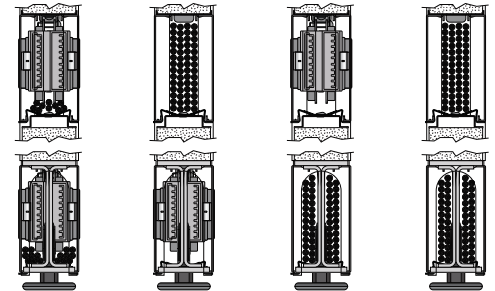


Z-Panel Dual Raceway - Powered Base and Beltline (left), Powered Base (center left), Powered Beltline (center right), Non-Powered Base and Beltline (right)

## MWall Panels Product Details

### Product Detail 4

#### Rules for Panel Stability without Components


The guidelines outlined below should be followed when designing AIS MWall panels without components to ensure panel stability and safety. Change in height will not effect panel stability. Note: Any panel not directly attached to a perpendicular panel or fixed wall will yield when pressure is applied.

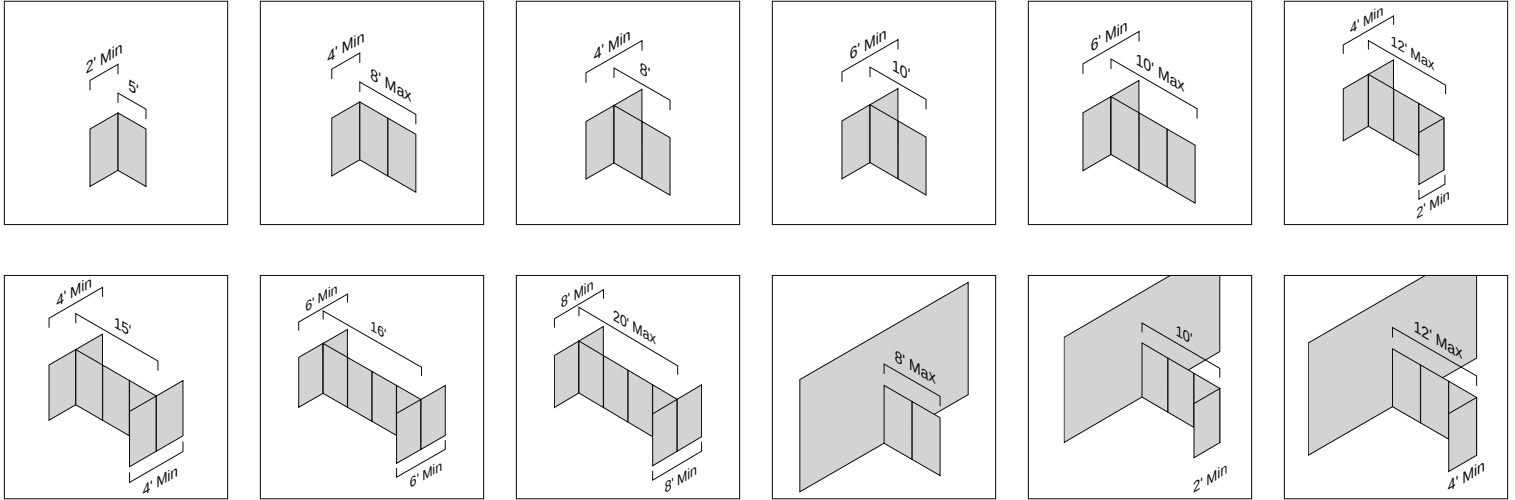

### Product Detail 5

#### Rules for Panel Stability with Components

The guidelines outlined below should be followed when designing AIS MWall panels with components to ensure panel stability and safety. Change in height will not effect panel stability. Note: Any panel not directly attached to a perpendicular panel or fixed wall will yield when pressure is applied.

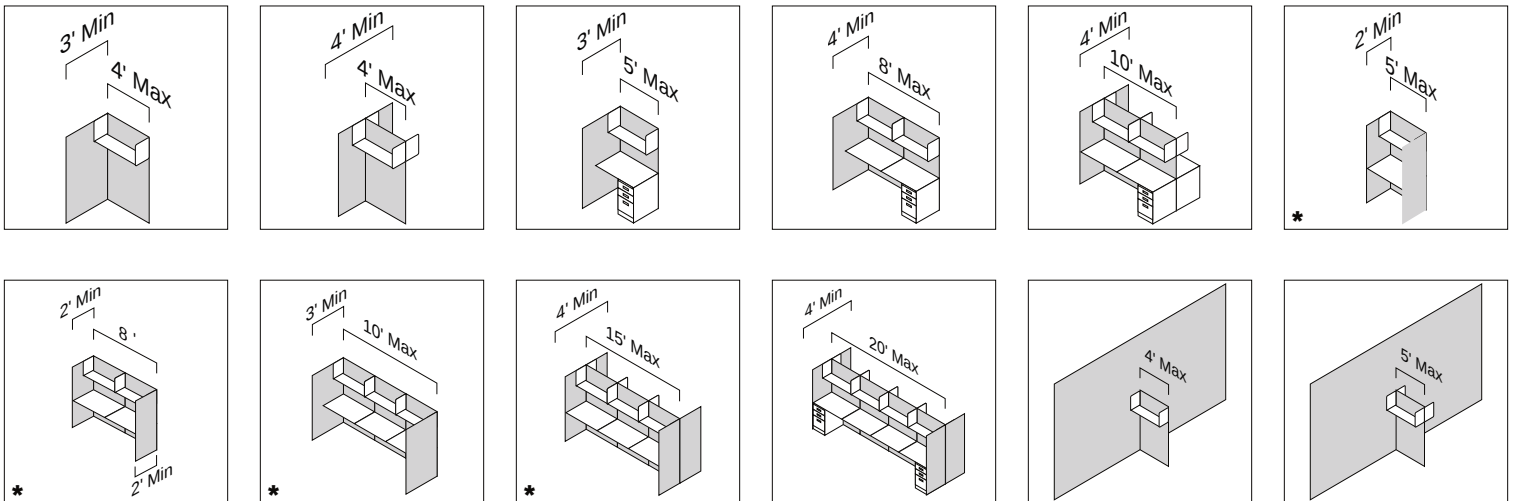

\* 30" worksurfaces must be supported at the front with side support brackets or floor support elements/pedestals.


## MWall Panels Product Details

### Product Detail 6 Panel Creep Dimensions

Small increments are added to or taken away from the length of a run of panels as a result of the many ways panels are connected to each other. The accumulation of these increments is called panel creep. AIS MWall panels sizes 24"w - 48"w (nominal) are actually  $\frac{5}{16}$ " oversized and 60"w panels (nominal) are actually  $\frac{5}{8}$ " oversized to maintain nominal interior workstation dimensions (see below).


#### Straight Connections:

Add  $\frac{1}{32}$ " to panel run for each straight connection. 24"W (nominal) panels are shown.

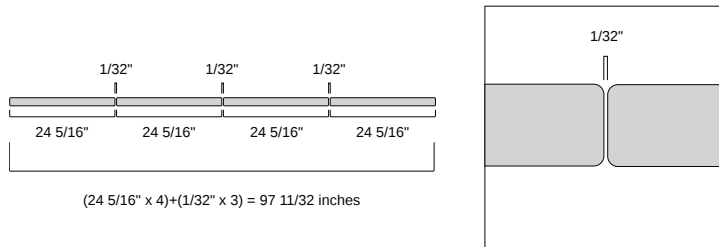


#### 2-Way Connections:

Add  $1 \frac{27}{32}$ " each time a perpendicular panel is added to the end of a panel run.

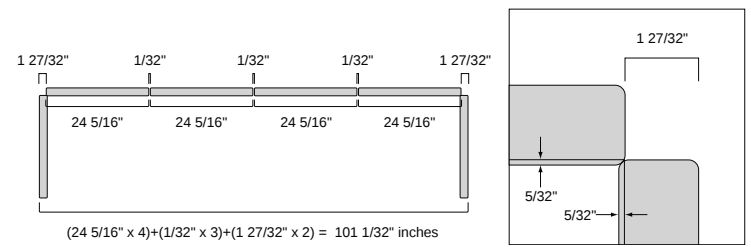


#### 3-Way and 4-Way Connections:

Add  $\frac{1}{32}$ " each time a perpendicular panel is inserted into a panel run.

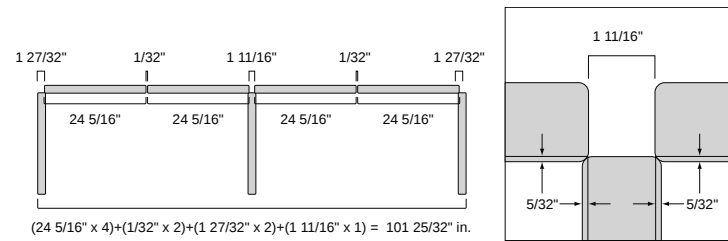

#### 60" Wide Panels:

60"W (nominal) panels are oversized by  $\frac{5}{8}$ " to compensate for situations where smaller panels might be used in place of one larger.

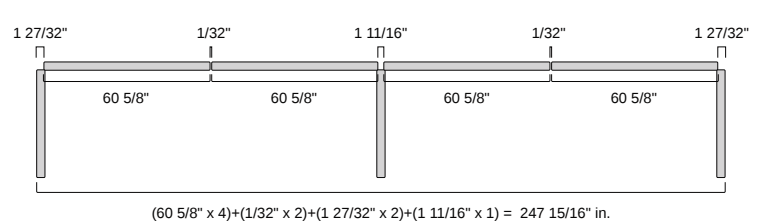

## Hard Surface Non-Raceway Panels

## HARD SURFACE NON-RACEWAY PANELS

| H  | W  | Model Number | List  | Grade C Paint | C.O.M Fabric | Grade C Fabric | Grade D Fabric |
|----|----|--------------|-------|---------------|--------------|----------------|----------------|
| 41 | 18 | P-SAFS4118   | 678   | +15           | -46          | +70            | +140           |
| 41 | 24 | P-SAFS4124   | 678   | +15           | -46          | +70            | +140           |
| 41 | 30 | P-SAFS4130   | 692   | +15           | -46          | +70            | +140           |
| 41 | 36 | P-SAFS4136   | 747   | +15           | -46          | +70            | +140           |
| 41 | 42 | P-SAFS4142   | 806   | +15           | -46          | +70            | +140           |
| 41 | 48 | P-SAFS4148   | 856   | +15           | -46          | +70            | +140           |
| 41 | 60 | P-SAFS4160   | 1,061 | +15           | -46          | +70            | +140           |
| 53 | 18 | P-SAFS5318   | 694   | +15           | -46          | +86            | +166           |
| 53 | 24 | P-SAFS5324   | 694   | +15           | -46          | +86            | +166           |
| 53 | 30 | P-SAFS5330   | 761   | +15           | -46          | +86            | +166           |
| 53 | 36 | P-SAFS5336   | 847   | +15           | -46          | +86            | +166           |
| 53 | 42 | P-SAFS5342   | 936   | +15           | -46          | +86            | +166           |
| 53 | 48 | P-SAFS5348   | 1,020 | +15           | -46          | +86            | +166           |
| 53 | 60 | P-SAFS5360   | 1,264 | +15           | -46          | +86            | +166           |
| 65 | 18 | P-SAFS6518   | 826   | +15           | -46          | +100           | +190           |
| 65 | 24 | P-SAFS6524   | 826   | +15           | -46          | +100           | +190           |
| 65 | 30 | P-SAFS6530   | 938   | +15           | -46          | +100           | +190           |
| 65 | 36 | P-SAFS6536   | 1,011 | +15           | -46          | +100           | +190           |
| 65 | 42 | P-SAFS6542   | 1,107 | +15           | -46          | +100           | +190           |
| 65 | 48 | P-SAFS6548   | 1,210 | +15           | -46          | +100           | +190           |
| 65 | 60 | P-SAFS6560   | 1,442 | +15           | -46          | +100           | +190           |



## Specify

## Notes

- Fabric Selection for Side A and B
- Paint Selection for Panel Trim

- Non-Raceway Panels - Hard Surface are fabric covered hard surface panels without a raceway unit.
- Includes one porkchop kit. The porkchop kit contains all the hardware needed to connect to a panel of equal height.
- For connecting to panels of unequal height, order HiLo Brackets. See "Connections".
- Non-raceway panels are the same height and therefore can be intermixed with non-powered and powered panels; however, electrical and data flow through adjoining raceway panels will be interrupted.

## Tackable Acoustical Surface Non-Raceway Panels

## TACKABLE ACOUSTICAL SURFACE NON-RACEWAY PANELS

| H  | W  | Model Number | List  | Grade C Paint | C.O.M Fabric | Grade C Fabric | Grade D Fabric |
|----|----|--------------|-------|---------------|--------------|----------------|----------------|
| 53 | 18 | P-SAAS5318   | 917   | +15           | -56          | +86            | +166           |
| 53 | 24 | P-SAAS5324   | 1,005 | +15           | -56          | +86            | +166           |
| 53 | 30 | P-SAAS5330   | 1,042 | +15           | -56          | +86            | +166           |
| 53 | 36 | P-SAAS5336   | 1,119 | +15           | -56          | +86            | +166           |
| 53 | 42 | P-SAAS5342   | 1,196 | +15           | -56          | +86            | +166           |
| 53 | 48 | P-SAAS5348   | 1,272 | +15           | -56          | +86            | +166           |
| 53 | 60 | P-SAAS5360   | 1,547 | +15           | -56          | +86            | +166           |
| 65 | 18 | P-SAAS6518   | 1,087 | +15           | -56          | +100           | +190           |
| 65 | 24 | P-SAAS6524   | 1,041 | +15           | -56          | +100           | +190           |
| 65 | 30 | P-SAAS6530   | 1,142 | +15           | -56          | +100           | +190           |
| 65 | 36 | P-SAAS6536   | 1,203 | +15           | -56          | +100           | +190           |
| 65 | 42 | P-SAAS6542   | 1,290 | +15           | -56          | +100           | +190           |
| 65 | 48 | P-SAAS6548   | 1,409 | +15           | -56          | +100           | +190           |
| 65 | 60 | P-SAAS6560   | 1,615 | +15           | -56          | +100           | +190           |



## Specify

- Fabric Selection for Side A and B
- Paint Selection for Panel Trim

## Notes

- Non-Raceway Panels - Tackable Acoustical Surface are fabric covered sound absorbing, tackable surface panels without a raceway unit.
- Includes one porkchop kit. The porkchop kit contains all the hardware needed to connect to a panel of equal height.
- For connecting to panels of unequal height, order HiLo Brackets. See "Connections".
- Non-raceway panels are the same height and therefore can be intermixed with non-powered and powered panels; however, electrical and data flow through adjoining raceway panels will be interrupted.

Non-Powered Hard Surface Panels

NON-POWERED HARD SURFACE PANELS

| H  | W  | Model Number | List  | Grade C Paint | Data KO | C.O.M Fabric | Grade C Fabric | Grade D Fabric |
|----|----|--------------|-------|---------------|---------|--------------|----------------|----------------|
| 41 | 18 | P-SAFR4118   | 771   | +15           | +15     | -46          | +70            | +140           |
| 41 | 24 | P-SAFR4124   | 787   | +15           | +15     | -46          | +70            | +140           |
| 41 | 30 | P-SAFR4130   | 852   | +15           | +15     | -46          | +70            | +140           |
| 41 | 36 | P-SAFR4136   | 906   | +15           | +15     | -46          | +70            | +140           |
| 41 | 42 | P-SAFR4142   | 965   | +15           | +15     | -46          | +70            | +140           |
| 41 | 48 | P-SAFR4148   | 1,021 | +15           | +15     | -46          | +70            | +140           |
| 41 | 60 | P-SAFR4160   | 1,220 | +15           | +15     | -46          | +70            | +140           |
| 53 | 18 | P-SAFR5318   | 804   | +15           | +15     | -56          | +86            | +166           |
| 53 | 24 | P-SAFR5324   | 847   | +15           | +15     | -56          | +86            | +166           |
| 53 | 30 | P-SAFR5330   | 938   | +15           | +15     | -56          | +86            | +166           |
| 53 | 36 | P-SAFR5336   | 1,032 | +15           | +15     | -56          | +86            | +166           |
| 53 | 42 | P-SAFR5342   | 1,124 | +15           | +15     | -56          | +86            | +166           |
| 53 | 48 | P-SAFR5348   | 1,219 | +15           | +15     | -56          | +86            | +166           |
| 53 | 60 | P-SAFR5360   | 1,451 | +15           | +15     | -56          | +86            | +166           |
| 65 | 18 | P-SAFR6518   | 847   | +15           | +15     | -56          | +100           | +190           |
| 65 | 24 | P-SAFR6524   | 975   | +15           | +15     | -56          | +100           | +190           |
| 65 | 30 | P-SAFR6530   | 1,075 | +15           | +15     | -56          | +100           | +190           |
| 65 | 36 | P-SAFR6536   | 1,169 | +15           | +15     | -56          | +100           | +190           |
| 65 | 42 | P-SAFR6542   | 1,266 | +15           | +15     | -56          | +100           | +190           |
| 65 | 48 | P-SAFR6548   | 1,365 | +15           | +15     | -56          | +100           | +190           |
| 65 | 60 | P-SAFR6560   | 1,636 | +15           | +15     | -56          | +100           | +190           |
| 80 | 18 | P-SAFR8018   | 938   | +15           | +15     | -94          | +120           | +226           |
| 80 | 24 | P-SAFR8024   | 1,107 | +15           | +15     | -94          | +120           | +226           |
| 80 | 30 | P-SAFR8030   | 1,219 | +15           | +15     | -94          | +120           | +226           |
| 80 | 36 | P-SAFR8036   | 1,338 | +15           | +15     | -94          | +120           | +226           |
| 80 | 42 | P-SAFR8042   | 1,444 | +15           | +15     | -94          | +120           | +226           |
| 80 | 48 | P-SAFR8048   | 1,583 | +15           | +15     | -94          | +120           | +226           |



Specify

Notes


- Fabric Selection for Side A and B
- Paint Selection for Panel Trim
- Data Knockout Option

- Non-Powered Panels - Hard Surface are fabric covered hard surface panels with a raceway unit.
- Includes one porkchop kit. The porkchop kit contains all the hardware needed to connect to a panel of equal height.
- For connecting to panels of unequal height, order HiLo Brackets. See "Connections".

## Powered Hard Surface Panels

## POWERED HARD SURFACE PANELS

| H  | W  | Model Number | List  | Grade C Paint | C.O.M Fabric | Grade C Fabric | Grade D Fabric |
|----|----|--------------|-------|---------------|--------------|----------------|----------------|
| 41 | 24 | P-SAFP4124   | 1,142 | +15           | -46          | +70            | +140           |
| 41 | 30 | P-SAFP4130   | 1,206 | +15           | -46          | +70            | +140           |
| 41 | 36 | P-SAFP4136   | 1,259 | +15           | -46          | +70            | +140           |
| 41 | 42 | P-SAFP4142   | 1,309 | +15           | -46          | +70            | +140           |
| 41 | 48 | P-SAFP4148   | 1,371 | +15           | -46          | +70            | +140           |
| 41 | 60 | P-SAFP4160   | 1,563 | +15           | -46          | +70            | +140           |
|    |    |              |       |               |              |                |                |
| 53 | 24 | P-SAFP5324   | 1,196 | +15           | -56          | +86            | +166           |
| 53 | 30 | P-SAFP5330   | 1,287 | +15           | -56          | +86            | +166           |
| 53 | 36 | P-SAFP5336   | 1,377 | +15           | -56          | +86            | +166           |
| 53 | 42 | P-SAFP5342   | 1,471 | +15           | -56          | +86            | +166           |
| 53 | 48 | P-SAFP5348   | 1,563 | +15           | -56          | +86            | +166           |
| 53 | 60 | P-SAFP5360   | 1,791 | +15           | -56          | +86            | +166           |
|    |    |              |       |               |              |                |                |
| 65 | 24 | P-SAFP6524   | 1,320 | +15           | -56          | +100           | +190           |
| 65 | 30 | P-SAFP6530   | 1,419 | +15           | -56          | +100           | +190           |
| 65 | 36 | P-SAFP6536   | 1,524 | +15           | -56          | +100           | +190           |
| 65 | 42 | P-SAFP6542   | 1,610 | +15           | -56          | +100           | +190           |
| 65 | 48 | P-SAFP6548   | 1,703 | +15           | -56          | +100           | +190           |
| 65 | 60 | P-SAFP6560   | 1,965 | +15           | -56          | +100           | +190           |
|    |    |              |       |               |              |                |                |
| 80 | 24 | P-SAFP8024   | 1,451 | +15           | -94          | +120           | +226           |
| 80 | 30 | P-SAFP8030   | 1,563 | +15           | -94          | +120           | +226           |
| 80 | 36 | P-SAFP8036   | 1,677 | +15           | -94          | +120           | +226           |
| 80 | 42 | P-SAFP8042   | 1,780 | +15           | -94          | +120           | +226           |
| 80 | 48 | P-SAFP8048   | 1,894 | +15           | -94          | +120           | +226           |



## Specify

## Notes

- Fabric Selection for Side A and B
- Paint Selection for Panel Trim

- Powered Panels - Hard Surface are fabric covered hard surface panels with a powered raceway unit.
- Includes one porkchop kit. The porkchop kit contains all the hardware needed to connect to a panel of equal height.
- For connecting to panels of unequal height, order HiLo Brackets. See "Connections".
- Duplex outlets and electrical jumpers are ordered separately. See "Electrical".
- Two duplex outlet hole covers are included with each powered panel

## Non-Powered Tackable Acoustical Surface Panels

## NON-POWERED TACKABLE ACOUSTICAL SURFACE PANELS

| H  | W  | Model Number | List  | Grade C Paint | Data KO | C.O.M Fabric | Grade C Fabric | Grade D Fabric |
|----|----|--------------|-------|---------------|---------|--------------|----------------|----------------|
| 53 | 18 | P-SAAR5318   | 906   | +15           | +15     | -56          | +86            | +166           |
| 53 | 24 | P-SAAR5324   | 1,036 | +15           | +15     | -56          | +86            | +166           |
| 53 | 30 | P-SAAR5330   | 1,098 | +15           | +15     | -56          | +86            | +166           |
| 53 | 36 | P-SAAR5336   | 1,182 | +15           | +15     | -56          | +86            | +166           |
| 53 | 42 | P-SAAR5342   | 1,264 | +15           | +15     | -56          | +86            | +166           |
| 53 | 48 | P-SAAR5348   | 1,344 | +15           | +15     | -56          | +86            | +166           |
| 53 | 60 | P-SAAR5360   | 1,606 | +15           | +15     | -56          | +86            | +166           |
| 65 | 18 | P-SAAR6518   | 1,087 | +15           | +15     | -56          | +100           | +190           |
| 65 | 24 | P-SAAR6524   | 1,167 | +15           | +15     | -56          | +100           | +190           |
| 65 | 30 | P-SAAR6530   | 1,251 | +15           | +15     | -56          | +100           | +190           |
| 65 | 36 | P-SAAR6536   | 1,338 | +15           | +15     | -56          | +100           | +190           |
| 65 | 42 | P-SAAR6542   | 1,424 | +15           | +15     | -56          | +100           | +190           |
| 65 | 48 | P-SAAR6548   | 1,511 | +15           | +15     | -56          | +100           | +190           |
| 65 | 60 | P-SAAR6560   | 1,774 | +15           | +15     | -56          | +100           | +190           |
| 80 | 18 | P-SAAR8018   | 1,210 | +15           | +15     | -94          | +120           | +226           |
| 80 | 24 | P-SAAR8024   | 1,300 | +15           | +15     | -94          | +120           | +226           |
| 80 | 30 | P-SAAR8030   | 1,409 | +15           | +15     | -94          | +120           | +226           |
| 80 | 36 | P-SAAR8036   | 1,547 | +15           | +15     | -94          | +120           | +226           |
| 80 | 42 | P-SAAR8042   | 1,670 | +15           | +15     | -94          | +120           | +226           |
| 80 | 48 | P-SAAR8048   | 1,772 | +15           | +15     | -94          | +120           | +226           |



## Specify

## Notes

- Fabric Selection for Side A and B
- Paint Selection for Panel Trim
- Data Knockout Option

- Non-Powered Panels - Tackable Acoustical Surface are fabric covered sound absorbing, tackable surface panels with a raceway unit.
- Includes one porkchop kit. The porkchop kit contains all the hardware needed to connect to a panel of equal height.
- For connecting to panels of unequal height, order HiLo brackets. See "Connections".

## Powered Tackable Acoustical Surface Panels

## POWERED TACKABLE ACOUSTICAL SURFACE PANELS

| H  | W  | Model Number | List  | Grade C Paint | C.O.M Fabric | Grade C Fabric | Grade D Fabric |
|----|----|--------------|-------|---------------|--------------|----------------|----------------|
| 53 | 24 | P-SAAP5324   | 1,426 | +15           | -56          | +86            | +166           |
| 53 | 30 | P-SAAP5330   | 1,489 | +15           | -56          | +86            | +166           |
| 53 | 36 | P-SAAP5336   | 1,572 | +15           | -56          | +86            | +166           |
| 53 | 42 | P-SAAP5342   | 1,655 | +15           | -56          | +86            | +166           |
| 53 | 48 | P-SAAP5348   | 1,733 | +15           | -56          | +86            | +166           |
| 53 | 60 | P-SAAP5360   | 1,994 | +15           | -56          | +86            | +166           |
| 65 | 24 | P-SAAP6524   | 1,536 | +15           | -56          | +100           | +190           |
| 65 | 30 | P-SAAP6530   | 1,619 | +15           | -56          | +100           | +190           |
| 65 | 36 | P-SAAP6536   | 1,703 | +15           | -56          | +100           | +190           |
| 65 | 42 | P-SAAP6542   | 1,793 | +15           | -56          | +100           | +190           |
| 65 | 48 | P-SAAP6548   | 1,879 | +15           | -56          | +100           | +190           |
| 65 | 60 | P-SAAP6560   | 2,144 | +15           | -56          | +100           | +190           |
| 80 | 24 | P-SAAP8024   | 1,664 | +15           | -94          | +120           | +226           |
| 80 | 30 | P-SAAP8030   | 1,772 | +15           | -94          | +120           | +226           |
| 80 | 36 | P-SAAP8036   | 1,909 | +15           | -94          | +120           | +226           |
| 80 | 42 | P-SAAP8042   | 2,003 | +15           | -94          | +120           | +226           |
| 80 | 48 | P-SAAP8048   | 2,099 | +15           | -94          | +120           | +226           |



## Specify

## Notes


- Fabric Selection for Side A and B
- Paint Selection for Panel Trim

- Powered Panels - Tackable Acoustical Surface are fabric covered sound absorbing, tackable surface panels with a powered raceway unit.
- Includes one porkchop kit. The porkchop kit contains all the hardware needed to connect to a panel of equal height.
- For connecting to panels of unequal height, order HiLo brackets. See "Connections".
- Duplex outlets and electrical jumpers are ordered separately. See "Electrical".
- Two duplex outlet hole covers are included with each powered panel.

Non-Powered Beltline Only Z-Panels

NON-POWERED BELTLINE ONLY Z-PANELS

| H  | W  | Model Number | List  | Grade C Paint | Data KO | C.O.M Fabric | Grade C Fabric | Grade D Fabric |
|----|----|--------------|-------|---------------|---------|--------------|----------------|----------------|
| 41 | 24 | P-SAFZSR4124 | 1,024 | +15           | +15     | -46          | +70            | +140           |
| 41 | 30 | P-SAFZSR4130 | 1,042 | +15           | +15     | -46          | +70            | +140           |
| 41 | 36 | P-SAFZSR4136 | 1,309 | +15           | +15     | -46          | +70            | +140           |
| 41 | 42 | P-SAFZSR4142 | 1,342 | +15           | +15     | -46          | +70            | +140           |
| 41 | 48 | P-SAFZSR4148 | 1,377 | +15           | +15     | -46          | +70            | +140           |
| 41 | 60 | P-SAFZSR4160 | 1,448 | +15           | +15     | -46          | +70            | +140           |
| 53 | 24 | P-SAFZSR5324 | 1,143 | +15           | +15     | -56          | +86            | +166           |
| 53 | 30 | P-SAFZSR5330 | 1,171 | +15           | +15     | -56          | +86            | +166           |
| 53 | 36 | P-SAFZSR5336 | 1,489 | +15           | +15     | -56          | +86            | +166           |
| 53 | 42 | P-SAFZSR5342 | 1,530 | +15           | +15     | -56          | +86            | +166           |
| 53 | 48 | P-SAFZSR5348 | 1,570 | +15           | +15     | -56          | +86            | +166           |
| 53 | 60 | P-SAFZSR5360 | 1,659 | +15           | +15     | -56          | +86            | +166           |
| 65 | 24 | P-SAFZSR6524 | 1,203 | +15           | +15     | -56          | +100           | +190           |
| 65 | 30 | P-SAFZSR6530 | 1,230 | +15           | +15     | -56          | +100           | +190           |
| 65 | 36 | P-SAFZSR6536 | 1,600 | +15           | +15     | -56          | +100           | +190           |
| 65 | 42 | P-SAFZSR6542 | 1,637 | +15           | +15     | -56          | +100           | +190           |
| 65 | 48 | P-SAFZSR6548 | 1,680 | +15           | +15     | -56          | +100           | +190           |
| 65 | 60 | P-SAFZSR6560 | 1,807 | +15           | +15     | -56          | +100           | +190           |



Specify


Notes

- Fabric Selection for Side A and B Tops and Bottoms
- Paint Selection for Panel Trim
- Data Knockout Option
- Z-Panel, Beltline Only - Non-Powered are fabric covered hard surface panels with a (non-powered) beltline raceway unit.
- Includes one porkchop kit. The porkchop kit contains all the hardware needed to connect to a panel of equal height.
- For connecting to panels of unequal height, order HiLo brackets. See "Connections".

## Powered Beltline Only Z-Panels

## POWERED BELTLINE ONLY Z-PANELS

| H  | W  | Model Number | List  | Grade C Paint | C.O.M Fabric | Grade C Fabric | Grade D Fabric |
|----|----|--------------|-------|---------------|--------------|----------------|----------------|
| 41 | 24 | P-SAFZSP4124 | 1,401 | +15           | -46          | +70            | +140           |
| 41 | 30 | P-SAFZSP4130 | 1,428 | +15           | -46          | +70            | +140           |
| 41 | 36 | P-SAFZSP4136 | 1,743 | +15           | -46          | +70            | +140           |
| 41 | 42 | P-SAFZSP4142 | 1,743 | +15           | -46          | +70            | +140           |
| 41 | 48 | P-SAFZSP4148 | 1,839 | +15           | -46          | +70            | +140           |
| 41 | 60 | P-SAFZSP4160 | 1,944 | +15           | -46          | +70            | +140           |
| 53 | 24 | P-SAFZSP5324 | 1,516 | +15           | -56          | +86            | +166           |
| 53 | 30 | P-SAFZSP5330 | 1,557 | +15           | -56          | +86            | +166           |
| 53 | 36 | P-SAFZSP5336 | 1,871 | +15           | -56          | +86            | +166           |
| 53 | 42 | P-SAFZSP5342 | 1,922 | +15           | -56          | +86            | +166           |
| 53 | 48 | P-SAFZSP5348 | 2,029 | +15           | -56          | +86            | +166           |
| 53 | 60 | P-SAFZSP5360 | 2,105 | +15           | -56          | +86            | +166           |
| 65 | 24 | P-SAFZSP6524 | 1,573 | +15           | -56          | +100           | +190           |
| 65 | 30 | P-SAFZSP6530 | 1,611 | +15           | -56          | +100           | +190           |
| 65 | 36 | P-SAFZSP6536 | 2,024 | +15           | -56          | +100           | +190           |
| 65 | 42 | P-SAFZSP6542 | 2,028 | +15           | -56          | +100           | +190           |
| 65 | 48 | P-SAFZSP6548 | 2,137 | +15           | -56          | +100           | +190           |
| 65 | 60 | P-SAFZSP6560 | 2,211 | +15           | -56          | +100           | +190           |



## Specify

## Notes


- Fabric Selection for Side A and B Tops and Bottoms
- Paint Selection for Panel Trim

- Z-Panel, Beltline Only - Powered are fabric covered hard surface panels with a (powered) beltline raceway unit.
- Includes one porkchop kit. The porkchop kit contains all the hardware needed to connect to a panel of equal height.
- For connecting to panels of unequal height, order HiLo brackets. See "Connections".
- Duplex outlets and electrical jumpers are ordered separately. See "Electrical".
- Two duplex outlet hole covers are included with each powered panel.

## Non-Powered Base / Non-Powered Beltline Dual Raceway Z-Panel

## NON-POWERED BASE / BELTLINE DUAL RACEWAY Z-PANEL

| H  | W  | Model Number | List  | Grade C Paint | Data KO | C.O.M Fabric | Grade C Fabric | Grade D Fabric |
|----|----|--------------|-------|---------------|---------|--------------|----------------|----------------|
| 41 | 24 | P-SAFZR4124  | 1,092 | +15           | +15     | -46          | +70            | +140           |
| 41 | 30 | P-SAFZR4130  | 1,129 | +15           | +15     | -46          | +70            | +140           |
| 41 | 36 | P-SAFZR4136  | 1,384 | +15           | +15     | -46          | +70            | +140           |
| 41 | 42 | P-SAFZR4142  | 1,626 | +15           | +15     | -46          | +70            | +140           |
| 41 | 48 | P-SAFZR4148  | 1,670 | +15           | +15     | -46          | +70            | +140           |
| 41 | 60 | P-SAFZR4160  | 1,767 | +15           | +15     | -46          | +70            | +140           |
| 53 | 24 | P-SAFZR5324  | 1,204 | +15           | +15     | -56          | +86            | +166           |
| 53 | 30 | P-SAFZR5330  | 1,251 | +15           | +15     | -56          | +86            | +166           |
| 53 | 36 | P-SAFZR5336  | 1,554 | +15           | +15     | -56          | +86            | +166           |
| 53 | 42 | P-SAFZR5342  | 1,805 | +15           | +15     | -56          | +86            | +166           |
| 53 | 48 | P-SAFZR5348  | 1,855 | +15           | +15     | -56          | +86            | +166           |
| 53 | 60 | P-SAFZR5360  | 1,976 | +15           | +15     | -56          | +86            | +166           |
| 65 | 24 | P-SAFZR6524  | 1,289 | +15           | +15     | -56          | +100           | +190           |
| 65 | 30 | P-SAFZR6530  | 1,307 | +15           | +15     | -56          | +100           | +190           |
| 65 | 36 | P-SAFZR6536  | 1,653 | +15           | +15     | -56          | +100           | +190           |
| 65 | 42 | P-SAFZR6542  | 1,913 | +15           | +15     | -56          | +100           | +190           |
| 65 | 48 | P-SAFZR6548  | 1,964 | +15           | +15     | -56          | +100           | +190           |
| 65 | 60 | P-SAFZR6560  | 2,078 | +15           | +15     | -56          | +100           | +190           |



## Specify


## Notes

- Fabric Selection for Side A and B Tops and Bottoms
- Paint Selection for Panel Trim
- Data Knockout Option
- Z-Panel, Dual Raceway - Non-Powered Base / Beltline are fabric covered hard surface panels with a (non-powered) belt-line raceway unit and a (non-powered) base raceway unit.
- Includes one porkchop kit. The porkchop kit contains all the hardware needed to connect to a panel of equal height.
- For connecting to panels of unequal height, order HiLo brackets. See "Connections".
- Duplex outlets and electrical jumpers are ordered separately. See "Electrical".

## Powered Base / Non-Powered Beltline Dual Raceway Z-Panels

## POWERED BASE / NON-POWERED BELTLINE DUAL RACEWAY Z-PANELS

| H  | W  | Model Number | List  | Grade C Paint | Data KO | C.O.M Fabric | Grade C Fabric | Grade D Fabric |
|----|----|--------------|-------|---------------|---------|--------------|----------------|----------------|
| 41 | 24 | P-SAFZPB4124 | 1,454 | +15           | +15     | -46          | +70            | +140           |
| 41 | 30 | P-SAFZPB4130 | 1,503 | +15           | +15     | -46          | +70            | +140           |
| 41 | 36 | P-SAFZPB4136 | 1,907 | +15           | +15     | -46          | +70            | +140           |
| 41 | 42 | P-SAFZPB4142 | 2,013 | +15           | +15     | -46          | +70            | +140           |
| 41 | 48 | P-SAFZPB4148 | 2,074 | +15           | +15     | -46          | +70            | +140           |
| 41 | 60 | P-SAFZPB4160 | 2,198 | +15           | +15     | -46          | +70            | +140           |
| 53 | 24 | P-SAFZPB5324 | 1,564 | +15           | +15     | -56          | +86            | +166           |
| 53 | 30 | P-SAFZPB5330 | 1,620 | +15           | +15     | -56          | +86            | +166           |
| 53 | 36 | P-SAFZPB5336 | 1,928 | +15           | +15     | -56          | +86            | +166           |
| 53 | 42 | P-SAFZPB5342 | 2,190 | +15           | +15     | -56          | +86            | +166           |
| 53 | 48 | P-SAFZPB5348 | 2,258 | +15           | +15     | -56          | +86            | +166           |
| 53 | 60 | P-SAFZPB5360 | 2,406 | +15           | +15     | -56          | +86            | +166           |
| 65 | 24 | P-SAFZPB6524 | 1,656 | +15           | +15     | -56          | +100           | +190           |
| 65 | 30 | P-SAFZPB6530 | 1,716 | +15           | +15     | -56          | +100           | +190           |
| 65 | 36 | P-SAFZPB6536 | 2,027 | +15           | +15     | -56          | +100           | +190           |
| 65 | 42 | P-SAFZPB6542 | 2,346 | +15           | +15     | -56          | +100           | +190           |
| 65 | 48 | P-SAFZPB6548 | 2,419 | +15           | +15     | -56          | +100           | +190           |
| 65 | 60 | P-SAFZPB6560 | 2,504 | +15           | +15     | -56          | +100           | +190           |




## Specify

## Notes

- Fabric Selection for Side A and B Tops and Bottoms
- Paint Selection for Panel Trim
- Data Knockout Option
- Z-Panel, Dual Raceway - Powered Base / Non-Powered Beltline are fabric covered hard surface panels with a (non-powered) beltline raceway unit and a (powered) base raceway unit.
- Includes one porkchop kit. The porkchop kit contains all the hardware needed to connect to a panel of equal height.
- For connecting to panels of unequal height, order HiLo brackets. See "Connections".
- Duplex outlets and electrical jumpers are ordered separately. See "Electrical".
- Two duplex outlet hole covers are included with each powered panel.

Non-Powered Base / Powered Beltline Dual Raceway Z-Panels

| NON-POWERED BASE / POWERED BELTLINE DUAL RACEWAY Z-PANELS |    |              |       |               |         |              |                |                |
|-----------------------------------------------------------|----|--------------|-------|---------------|---------|--------------|----------------|----------------|
| H                                                         | W  | Model Number | List  | Grade C Paint | Data KO | C.O.M Fabric | Grade C Fabric | Grade D Fabric |
| 41                                                        | 24 | P-SAFZPT4124 | 1,454 | +15           | +15     | -46          | +70            | +140           |
| 41                                                        | 30 | P-SAFZPT4130 | 1,503 | +15           | +15     | -46          | +70            | +140           |
| 41                                                        | 36 | P-SAFZPT4136 | 1,806 | +15           | +15     | -46          | +70            | +140           |
| 41                                                        | 42 | P-SAFZPT4142 | 2,013 | +15           | +15     | -46          | +70            | +140           |
| 41                                                        | 48 | P-SAFZPT4148 | 2,125 | +15           | +15     | -46          | +70            | +140           |
| 41                                                        | 60 | P-SAFZPT4160 | 2,262 | +15           | +15     | -46          | +70            | +140           |
| 53                                                        | 24 | P-SAFZPT5324 | 1,564 | +15           | +15     | -56          | +86            | +166           |
| 53                                                        | 30 | P-SAFZPT5330 | 1,620 | +15           | +15     | -56          | +86            | +166           |
| 53                                                        | 36 | P-SAFZPT5336 | 1,928 | +15           | +15     | -56          | +86            | +166           |
| 53                                                        | 42 | P-SAFZPT5342 | 2,190 | +15           | +15     | -56          | +86            | +166           |
| 53                                                        | 48 | P-SAFZPT5348 | 2,258 | +15           | +15     | -56          | +86            | +166           |
| 53                                                        | 60 | P-SAFZPT5360 | 2,460 | +15           | +15     | -56          | +86            | +166           |
| 65                                                        | 24 | P-SAFZPT6524 | 1,656 | +15           | +15     | -56          | +100           | +190           |
| 65                                                        | 30 | P-SAFZPT6530 | 1,716 | +15           | +15     | -56          | +100           | +190           |
| 65                                                        | 36 | P-SAFZPT6536 | 2,075 | +15           | +15     | -56          | +100           | +190           |
| 65                                                        | 42 | P-SAFZPT6542 | 2,290 | +15           | +15     | -56          | +100           | +190           |
| 65                                                        | 48 | P-SAFZPT6548 | 2,419 | +15           | +15     | -56          | +100           | +190           |
| 65                                                        | 60 | P-SAFZPT6560 | 2,564 | +15           | +15     | -56          | +100           | +190           |




| Specify                                                                                                                                                                    | Notes                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------|------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"> <li>Fabric Selection for Side A and B Tops and Bottoms</li> <li>Paint Selection for Panel Trim</li> <li>Data Knockout Option</li> </ul> | <ul style="list-style-type: none"> <li>Z-Panel, Dual Raceway - Non-Powered Base / Powered Beltline are fabric covered hard surface panels with a (powered) beltline raceway unit and a (non-powered) base raceway unit.</li> <li>Includes one porkchop kit. The porkchop kit contains all the hardware needed to connect to a panel of equal height.</li> <li>For connecting to panels of unequal height, order HiLo brackets. See "Connections".</li> <li>Duplex outlets and electrical jumpers are ordered separately. See "Electrical".</li> <li>Two duplex outlet hole covers are included with each powered panel.</li> </ul> |

## Powered Base / Powered Beltline Dual Raceway Z-Panels

## POWERED BASE / POWERED BELTLINE DUAL RACEWAY Z-PANELS

| H  | W  | Model Number | List  | Grade C Paint | C.O.M Fabric | Grade C Fabric | Grade D Fabric |
|----|----|--------------|-------|---------------|--------------|----------------|----------------|
| 41 | 24 | P-SAFZP4124  | 1,782 | +15           | -46          | +70            | +140           |
| 41 | 30 | P-SAFZP4130  | 1,839 | +15           | -46          | +70            | +140           |
| 41 | 36 | P-SAFZP4136  | 2,100 | +15           | -46          | +70            | +140           |
| 41 | 42 | P-SAFZP4142  | 2,353 | +15           | -46          | +70            | +140           |
| 41 | 48 | P-SAFZP4148  | 2,428 | +15           | -46          | +70            | +140           |
| 41 | 60 | P-SAFZP4160  | 2,589 | +15           | -46          | +70            | +140           |
| 53 | 24 | P-SAFZP5324  | 1,889 | +15           | -56          | +86            | +166           |
| 53 | 30 | P-SAFZP5330  | 1,955 | +15           | -56          | +86            | +166           |
| 53 | 36 | P-SAFZP5336  | 2,260 | +15           | -56          | +86            | +166           |
| 53 | 42 | P-SAFZP5342  | 2,523 | +15           | -56          | +86            | +166           |
| 53 | 48 | P-SAFZP5348  | 2,608 | +15           | -56          | +86            | +166           |
| 53 | 60 | P-SAFZP5360  | 2,779 | +15           | -56          | +86            | +166           |
| 65 | 24 | P-SAFZP6524  | 1,940 | +15           | -56          | +100           | +190           |
| 65 | 30 | P-SAFZP6530  | 2,004 | +15           | -56          | +100           | +190           |
| 65 | 36 | P-SAFZP6536  | 2,355 | +15           | -56          | +100           | +190           |
| 65 | 42 | P-SAFZP6542  | 2,622 | +15           | -56          | +100           | +190           |
| 65 | 48 | P-SAFZP6548  | 2,705 | +15           | -56          | +100           | +190           |
| 65 | 60 | P-SAFZP6560  | 2,882 | +15           | -56          | +100           | +190           |



## Specify


## Notes

- Fabric Selection for Side A and B Tops and Bottoms
- Paint Selection for Panel Trim
- Z-Panel, Dual Raceway - Powered Base / Powered Beltline are fabric covered hard surface panels with a (powered) belt-line raceway unit and a (powered) base raceway unit.
- Includes one porkchop kit. The porkchop kit contains all the hardware needed to connect to a panel of equal height.
- For connecting to panels of unequal height, order HiLo brackets. See "Connections".
- Duplex outlets and electrical jumpers are ordered separately. See "Electrical".
- Four duplex outlet hole covers are included with each powered panel.

## Non-Powered Quarter Glass Panels

## NON-POWERED QUARTER GLASS PANELS

| H  | W  | Model Number | List  | Grade C Paint | Data KO | C.O.M Fabric | Grade C Fabric | Grade D Fabric |
|----|----|--------------|-------|---------------|---------|--------------|----------------|----------------|
| 65 | 24 | P-SAQGRW6524 | 1,990 | +15           | +15     | -46          | +70            | +140           |
| 65 | 30 | P-SAQGRW6530 | 2,202 | +15           | +15     | -46          | +70            | +140           |
| 65 | 36 | P-SAQGRW6536 | 2,411 | +15           | +15     | -46          | +70            | +140           |
| 65 | 42 | P-SAQGRW6542 | 2,619 | +15           | +15     | -46          | +70            | +140           |
| 65 | 48 | P-SAQGRW6548 | 2,830 | +15           | +15     | -46          | +70            | +140           |
| 80 | 24 | P-SAQGRW8024 | 2,260 | +15           | +15     | -46          | +70            | +140           |
| 80 | 30 | P-SAQGRW8030 | 2,514 | +15           | +15     | -46          | +70            | +140           |
| 80 | 36 | P-SAQGRW8036 | 2,759 | +15           | +15     | -46          | +70            | +140           |
| 80 | 42 | P-SAQGRW8042 | 3,015 | +15           | +15     | -46          | +70            | +140           |
| 80 | 48 | P-SAQGRW8048 | 3,267 | +15           | +15     | -46          | +70            | +140           |



## Specify

## Notes


- Fabric Selection for Side A
- Paint Selection for Panel Trim
- Style Selection for Tempered Glass Insert
- Data Knockout Option

- Quarter Glass Panels - Non-Powered have an aluminum wrapped tempered glass insert at the top of the panel that is available in multiple style finishes.
- The lower section of the panel is a fabric covered hard surface with a (non-powered) raceway unit.
- Includes one porkchop kit. The porkchop kit contains all the hardware needed to connect to a panel of equal height.
- For connecting to panels of unequal height, order HiLo brackets. See "Connections".
- 65"H panels fabric height is 51"H with glides fully extended, 80"H panels fabric height is 63 5/8"H with glides fully extended.

## Powered Quarter Glass Panels

## POWERED QUARTER GLASS PANELS

| H  | W  | Model Number | List  | Grade C Paint | C.O.M Fabric | Grade C Fabric | Grade D Fabric |
|----|----|--------------|-------|---------------|--------------|----------------|----------------|
| 65 | 24 | P-SAQGPW6524 | 2,306 | +15           | -46          | +70            | +140           |
| 65 | 30 | P-SAQGPW6530 | 2,520 | +15           | -46          | +70            | +140           |
| 65 | 36 | P-SAQGPW6536 | 2,734 | +15           | -46          | +70            | +140           |
| 65 | 42 | P-SAQGPW6542 | 2,951 | +15           | -46          | +70            | +140           |
| 65 | 48 | P-SAQGPW6548 | 3,164 | +15           | -46          | +70            | +140           |
| 80 | 24 | P-SAQGPW8024 | 2,588 | +15           | -46          | +70            | +140           |
| 80 | 30 | P-SAQGPW8030 | 2,841 | +15           | -46          | +70            | +140           |
| 80 | 36 | P-SAQGPW8036 | 3,095 | +15           | -46          | +70            | +140           |
| 80 | 42 | P-SAQGPW8042 | 3,354 | +15           | -46          | +70            | +140           |
| 80 | 48 | P-SAQGPW8048 | 3,613 | +15           | -46          | +70            | +140           |



## Specify

- Fabric Selection for Side A and B
- Paint Selection for Panel Trim
- Style Selection for Tempered Glass Insert

## Notes

- Quarter Glass Panels - Powered have an aluminum wrapped tempered glass insert at the top of the panel that is available in multiple style finishes.
- The lower section of the panel is a fabric covered hard surface with a (powered) raceway unit.
- Includes one porkchop kit. The porkchop kit contains all the hardware needed to connect to a panel of equal height.
- For connecting to panels of unequal height, order HiLo brackets. See "Connections".
- Duplex outlets and electrical jumpers are ordered separately. See "Electrical". Two duplex outlet hole covers are included with each powered panel.
- 65"H panels fabric height is 51"H with glides fully extended, 80"H panels fabric height is 63 5/8"H with glides fully extended.

## Non-Powered Half Glass Panels

## NON-POWERED HALF GLASS PANELS

| H  | W  | Model Number | List  | Grade C Paint | Data KO | C.O.M Fabric | Grade C Fabric | Grade D Fabric |
|----|----|--------------|-------|---------------|---------|--------------|----------------|----------------|
| 53 | 24 | P-SAHGRW5324 | 1,723 | +15           | +15     | -46          | +70            | +140           |
| 53 | 30 | P-SAHGRW5330 | 1,894 | +15           | +15     | -46          | +70            | +140           |
| 53 | 36 | P-SAHGRW5336 | 2,061 | +15           | +15     | -46          | +70            | +140           |
| 53 | 42 | P-SAHGRW5342 | 2,231 | +15           | +15     | -46          | +70            | +140           |
| 53 | 48 | P-SAHGRW5348 | 2,396 | +15           | +15     | -46          | +70            | +140           |
| 65 | 24 | P-SAHGRW6524 | 1,990 | +15           | +15     | -46          | +70            | +140           |
| 65 | 30 | P-SAHGRW6530 | 2,202 | +15           | +15     | -46          | +70            | +140           |
| 65 | 36 | P-SAHGRW6536 | 2,411 | +15           | +15     | -46          | +70            | +140           |
| 65 | 42 | P-SAHGRW6542 | 2,619 | +15           | +15     | -46          | +70            | +140           |
| 65 | 48 | P-SAHGRW6548 | 2,830 | +15           | +15     | -46          | +70            | +140           |
| 80 | 24 | P-SAHGRW8024 | 2,260 | +15           | +15     | -46          | +70            | +140           |
| 80 | 30 | P-SAHGRW8030 | 2,514 | +15           | +15     | -46          | +70            | +140           |
| 80 | 36 | P-SAHGRW8036 | 2,759 | +15           | +15     | -46          | +70            | +140           |
| 80 | 42 | P-SAHGRW8042 | 3,015 | +15           | +15     | -46          | +70            | +140           |
| 80 | 48 | P-SAHGRW8048 | 3,267 | +15           | +15     | -46          | +70            | +140           |



## Specify

## Notes

- Fabric Selection for Side A and B
- Paint Selection for Panel Trim
- Style Selection for Tempered Glass Insert
- Data Knockout Option

- Half Glass Panels - Non-Powered have an aluminum wrapped tempered glass insert at the top of the panel that is available in multiple style finishes.
- The lower section of the panel is a fabric covered hard surface with a (non-powered) raceway unit.
- Includes one porkchop kit. The porkchop kit contains all the hardware needed to connect to a panel of equal height.
- For connecting to panels of unequal height, order HiLo brackets. See "Connections".

## Powered Half Glass Panels

## POWERED HALF GLASS PANELS

| H  | W  | Model Number | List  | Grade C Paint | C.O.M Fabric | Grade C Fabric | Grade D Fabric |
|----|----|--------------|-------|---------------|--------------|----------------|----------------|
| 53 | 24 | P-SAHGPW5324 | 2,028 | +15           | -46          | +70            | +140           |
| 53 | 30 | P-SAHGPW5330 | 2,200 | +15           | -46          | +70            | +140           |
| 53 | 36 | P-SAHGPW5336 | 2,375 | +15           | -46          | +70            | +140           |
| 53 | 42 | P-SAHGPW5342 | 2,548 | +15           | -46          | +70            | +140           |
| 53 | 48 | P-SAHGPW5348 | 2,718 | +15           | -46          | +70            | +140           |
| 65 | 24 | P-SAHGPW6524 | 2,306 | +15           | -46          | +70            | +140           |
| 65 | 30 | P-SAHGPW6530 | 2,520 | +15           | -46          | +70            | +140           |
| 65 | 36 | P-SAHGPW6536 | 2,734 | +15           | -46          | +70            | +140           |
| 65 | 42 | P-SAHGPW6542 | 2,951 | +15           | -46          | +70            | +140           |
| 65 | 48 | P-SAHGPW6548 | 3,164 | +15           | -46          | +70            | +140           |
| 80 | 24 | P-SAHGPW8024 | 2,588 | +15           | -46          | +70            | +140           |
| 80 | 30 | P-SAHGPW8030 | 2,841 | +15           | -46          | +70            | +140           |
| 80 | 36 | P-SAHGPW8036 | 3,095 | +15           | -46          | +70            | +140           |
| 80 | 42 | P-SAHGPW8042 | 3,354 | +15           | -46          | +70            | +140           |
| 80 | 48 | P-SAHGPW8048 | 3,613 | +15           | -46          | +70            | +140           |



## Specify

## Notes


- Fabric Selection for Side A and B
- Paint Selection for Panel Trim
- Style Selection for Tempered Glass Insert

- Half Glass Panels - Powered have an aluminum wrapped tempered glass insert at the top of the panel that is available in multiple style finishes.
- The lower section of the panel is a fabric covered hard surface with a (powered) raceway unit.
- Includes one porkchop kit. The porkchop kit contains all the hardware needed to connect to a panel of equal height.
- For connecting to panels of unequal height, order HiLo brackets. See "Connections".
- Duplex outlets and electrical jumpers are ordered separately. See "Electrical".
- Two duplex outlet hole covers are included with each powered panel.
- Fabric height is 39 1/2" from floor when glides are fully extended.

## Non-Powered Air Flow / Wall Access Panels

## NON-POWERED AIR FLOW / WALL ACCESS PANELS

| H  | W  | Model Number | List  | Grade C Paint | Data KO | C.O.M Fabric | Grade C Fabric | Grade D Fabric |
|----|----|--------------|-------|---------------|---------|--------------|----------------|----------------|
| 41 | 24 | P-SAF0BR4124 | 1,217 | +15           | +15     | -46          | +70            | +140           |
| 41 | 30 | P-SAF0BR4130 | 1,314 | +15           | +15     | -46          | +70            | +140           |
| 41 | 36 | P-SAF0BR4136 | 1,404 | +15           | +15     | -46          | +70            | +140           |
| 41 | 42 | P-SAF0BR4142 | 1,491 | +15           | +15     | -46          | +70            | +140           |
| 41 | 48 | P-SAF0BR4148 | 1,583 | +15           | +15     | -46          | +70            | +140           |
| 41 | 60 | P-SAF0BR4160 | 1,892 | +15           | +15     | -46          | +70            | +140           |
|    |    |              |       |               |         |              |                |                |
| 53 | 24 | P-SAF0BR5324 | 1,309 | +15           | +15     | -56          | +86            | +166           |
| 53 | 30 | P-SAF0BR5330 | 1,451 | +15           | +15     | -56          | +86            | +166           |
| 53 | 36 | P-SAF0BR5336 | 1,600 | +15           | +15     | -56          | +86            | +166           |
| 53 | 42 | P-SAF0BR5342 | 1,740 | +15           | +15     | -56          | +86            | +166           |
| 53 | 48 | P-SAF0BR5348 | 1,888 | +15           | +15     | -56          | +86            | +166           |
| 53 | 60 | P-SAF0BR5360 | 2,248 | +15           | +15     | -56          | +86            | +166           |
|    |    |              |       |               |         |              |                |                |
| 65 | 24 | P-SAF0BR6524 | 1,511 | +15           | +15     | -56          | +100           | +190           |
| 65 | 30 | P-SAF0BR6530 | 1,663 | +15           | +15     | -56          | +100           | +190           |
| 65 | 36 | P-SAF0BR6536 | 1,807 | +15           | +15     | -56          | +100           | +190           |
| 65 | 42 | P-SAF0BR6542 | 1,963 | +15           | +15     | -56          | +100           | +190           |
| 65 | 48 | P-SAF0BR6548 | 2,115 | +15           | +15     | -56          | +100           | +190           |
| 65 | 60 | P-SAF0BR6560 | 2,531 | +15           | +15     | -56          | +100           | +190           |
|    |    |              |       |               |         |              |                |                |
| 80 | 24 | P-SAF0BR8024 | 1,717 | +15           | +15     | -94          | +120           | +226           |
| 80 | 30 | P-SAF0BR8030 | 1,888 | +15           | +15     | -94          | +120           | +226           |
| 80 | 36 | P-SAF0BR8036 | 2,069 | +15           | +15     | -94          | +120           | +226           |
| 80 | 42 | P-SAF0BR8042 | 2,240 | +15           | +15     | -94          | +120           | +226           |
| 80 | 48 | P-SAF0BR8048 | 2,456 | +15           | +15     | -94          | +120           | +226           |



## Specify

## Notes


- Fabric Selection for Side A and B
- Paint Selection for Panel Trim
- Data Knockout Option

- Non-Powered Panels - Air Flow / Wall Access are fabric covered hard surface panels with a raceway unit.
- Includes one porkchop kit. The porkchop kit contains all the hardware needed to connect to a panel of equal height.
- For connecting to panels of unequal height, order HiLo brackets. See "Connections".
- Air Flow / Wall Access Panels have a 3" fabric border around the opening that allows for air flow.
- The height of the opening is 16".

## Powered Air Flow / Wall Access Panels

## POWERED AIR FLOW / WALL ACCESS PANELS

| H  | W  | Model Number | List  | Grade C Paint | C.O.M Fabric | Grade C Fabric | Grade D Fabric |
|----|----|--------------|-------|---------------|--------------|----------------|----------------|
| 41 | 24 | P-SAFOBP4124 | 1,766 | +15           | -46          | +70            | +140           |
| 41 | 30 | P-SAFOBP4130 | 1,865 | +15           | -46          | +70            | +140           |
| 41 | 36 | P-SAFOBP4136 | 1,946 | +15           | -46          | +70            | +140           |
| 41 | 42 | P-SAFOBP4142 | 2,030 | +15           | -46          | +70            | +140           |
| 41 | 48 | P-SAFOBP4148 | 2,122 | +15           | -46          | +70            | +140           |
| 41 | 60 | P-SAFOBP4160 | 2,418 | +15           | -46          | +70            | +140           |
|    |    |              |       |               |              |                |                |
| 53 | 24 | P-SAFOBP5324 | 1,852 | +15           | -56          | +86            | +166           |
| 53 | 30 | P-SAFOBP5330 | 1,990 | +15           | -56          | +86            | +166           |
| 53 | 36 | P-SAFOBP5336 | 2,128 | +15           | -56          | +86            | +166           |
| 53 | 42 | P-SAFOBP5342 | 2,277 | +15           | -56          | +86            | +166           |
| 53 | 48 | P-SAFOBP5348 | 2,418 | +15           | -56          | +86            | +166           |
| 53 | 60 | P-SAFOBP5360 | 2,773 | +15           | -56          | +86            | +166           |
|    |    |              |       |               |              |                |                |
| 65 | 24 | P-SAFOBP6524 | 2,045 | +15           | -56          | +100           | +190           |
| 65 | 30 | P-SAFOBP6530 | 2,194 | +15           | -56          | +100           | +190           |
| 65 | 36 | P-SAFOBP6536 | 2,361 | +15           | -56          | +100           | +190           |
| 65 | 42 | P-SAFOBP6542 | 2,490 | +15           | -56          | +100           | +190           |
| 65 | 48 | P-SAFOBP6548 | 2,638 | +15           | -56          | +100           | +190           |
| 65 | 60 | P-SAFOBP6560 | 3,045 | +15           | -56          | +100           | +190           |
|    |    |              |       |               |              |                |                |
| 80 | 24 | P-SAFOBP8024 | 2,248 | +15           | -94          | +120           | +226           |
| 80 | 30 | P-SAFOBP8030 | 2,418 | +15           | -94          | +120           | +226           |
| 80 | 36 | P-SAFOBP8036 | 2,595 | +15           | -94          | +120           | +226           |
| 80 | 42 | P-SAFOBP8042 | 2,757 | +15           | -94          | +120           | +226           |
| 80 | 48 | P-SAFOBP8048 | 2,932 | +15           | -94          | +120           | +226           |



## Specify

- Fabric Selection for Side A and B
- Paint Selection for Panel Trim


## Notes

- Powered Panels - Air Flow / Wall Access are fabric covered hard surface panels with a powered raceway unit.
- Includes one porkchop kit. The porkchop kit contains all the hardware needed to connect to a panel of equal height.
- For connecting to panels of unequal height, order HiLo brackets. See "Connections".
- Duplex outlets and electrical jumpers are ordered separately. See "Electrical".
- Two duplex outlet hole covers are included with each powered panel.
- Air Flow / Wall Access Panels have a 3" fabric border around the opening that allows for air flow.
- The height of the opening is 16".


ADA Door Panels

ADA DOOR PANELS

| H  | W  | Type  | Model Number | List  | Grade C<br>Panel<br>Trim | Grade C<br>Door<br>Paint |
|----|----|-------|--------------|-------|--------------------------|--------------------------|
| 80 | 42 | Left  | P-SADL8042   | 4,800 | +15                      | +100                     |
| 80 | 42 | Right | P-SADR8042   | 4,800 | +15                      | +100                     |



Left Hand




Right Hand


| Specify                                                                                  | Notes                                                                                                                                                                                                                                                                                                                                                                                                                    |
|------------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"><li>•Paint Selection for Door and Door Frame</li></ul> | <ul style="list-style-type: none"><li>•ADA Door Panels use a steel tube frame with hollow core door, stainless steel threshold, locking ADA door handle and full height transparent window.</li><li>•Includes one panel, one locking ADA lockset, and two keys.</li><li>•Lockset is field installed.</li><li>•Metallic colors are not available on actual door, only metal frame available in metallic colors.</li></ul> |

ADA GLASS WINDOW DOOR PANELS

| H  | W  | Type  | Model Number | List  | Grade C<br>Panel<br>Trim | Grade C<br>Door<br>Paint |
|----|----|-------|--------------|-------|--------------------------|--------------------------|
| 80 | 42 | Left  | P-SADLG8042  | 7,361 | +15                      | +100                     |
| 80 | 42 | Right | P-SADRG8042  | 7,361 | +15                      | +100                     |



Left Hand




Right Hand

| Specify                                                                                                                           | Notes                                                                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|-----------------------------------------------------------------------------------------------------------------------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"><li>•Paint Selection for Door and Door Frame</li><li>•Insert Style for Tempered Glass</li></ul> | <ul style="list-style-type: none"><li>•ADA Glass Window Door Panels use a steel tube frame with hollow core door, stainless steel threshold, locking ADA door handle and full height transparent window.</li><li>•Includes one panel, one locking ADA lockset, and two keys.</li><li>•Lockset is field installed.</li><li>•Door has a 5" wood painted border around the glass.</li><li>•Metallic colors are not available on actual door, only metal frame available in metallic colors.</li></ul> |


## Linear Sliding Privacy Screens

| MWALL LINEAR SLIDING SCREENS |           |                  |               |               |       |               |
|------------------------------|-----------|------------------|---------------|---------------|-------|---------------|
| Panel H                      | Doorway W | Adjacent Panel W | Left Hand     | Right Hand    | List  | Grade C Paint |
|                              |           |                  | Model Number  | Model Number  |       |               |
| 65                           | 36        | 36               | P-MWLR6536L   | P-MWLR6536R   | 3,615 | +25           |
| 65                           | 36        | 42               | P-MWLR653642L | P-MWLR653642R | 3,697 | +25           |
| 65                           | 36        | 48               | P-MWLR653648L | P-MWLR653648R | 3,779 | +25           |
| 65                           | 42        | 42               | P-MWLR6542L   | P-MWLR6542R   | 3,620 | +25           |
| 65                           | 42        | 48               | P-MWLR654248L | P-MWLR654248R | 3,703 | +25           |
| 65                           | 48        | 48               | P-MWLR6548L   | P-MWLR6548R   | 3,838 | +25           |
| 80                           | 36        | 36               | P-MWLR8036L   | P-MWLR8036R   | 3,762 | +25           |
| 80                           | 36        | 42               | P-MWLR803642L | P-MWLR803642R | 3,843 | +25           |
| 80                           | 36        | 48               | P-MWLR803648L | P-MWLR803648R | 3,927 | +25           |
| 80                           | 42        | 42               | P-MWLR8042L   | P-MWLR8042R   | 3,774 | +25           |
| 80                           | 42        | 48               | P-MWLR804248L | P-MWLR804248R | 3,857 | +25           |
| 80                           | 48        | 48               | P-MWLR8048L   | P-MWLR8048R   | 3,888 | +25           |


| MWALL LINEAR LOCKING SLIDING SCREENS |           |                  |                |                |       |               |
|--------------------------------------|-----------|------------------|----------------|----------------|-------|---------------|
| Panel H                              | Doorway W | Adjacent Panel W | Left Hand      | Right Hand     | List  | Grade C Paint |
|                                      |           |                  | Model Number   | Model Number   |       |               |
| 65                                   | 36        | 36               | P-MWLR6536LL   | P-MWLR6536RL   | 3,851 | +25           |
| 65                                   | 36        | 42               | P-MWLR653642LL | P-MWLR653642RL | 3,933 | +25           |
| 65                                   | 36        | 48               | P-MWLR653648LL | P-MWLR653648RL | 4,014 | +25           |
| 65                                   | 42        | 42               | P-MWLR6542LL   | P-MWLR6542RL   | 3,859 | +25           |
| 65                                   | 42        | 48               | P-MWLR654248LL | P-MWLR654248RL | 3,940 | +25           |
| 65                                   | 48        | 48               | P-MWLR6548LL   | P-MWLR6548RL   | 4,074 | +25           |
| 80                                   | 36        | 36               | P-MWLR8036LL   | P-MWLR8036RL   | 4,000 | +25           |
| 80                                   | 36        | 42               | P-MWLR803642LL | P-MWLR803642RL | 4,081 | +25           |
| 80                                   | 36        | 48               | P-MWLR803648LL | P-MWLR803648RL | 4,164 | +25           |
| 80                                   | 42        | 42               | P-MWLR8042LL   | P-MWLR8042RL   | 4,011 | +25           |
| 80                                   | 42        | 48               | P-MWLR804248LL | P-MWLR804248RL | 4,094 | +25           |
| 80                                   | 48        | 48               | P-MWLR8048LL   | P-MWLR8048RL   | 4,125 | +25           |




Right Hand with Optional Handle Shown



Right Hand with Optional Handle Shown



Right Hand with Lock and Handle Shown



Right Hand with Lock and Handle Shown



## Specify

- Paint Selection for Sliding Door Frame

## Notes

- The Linear Sliding Privacy Screen attaches to frame face at either left or right, outside or inside of an opening.
- Select a Sliding Privacy Screen based upon the dimensions of the opening it will cover and the adjacent panel that it will be installed to.
- Linear Sliding Privacy Screens are available to accommodate 36", 42" or 48" wide by 65" or 80" high openings and adjacent panels.
- All doors come with a top track bar kit for added stability; only 80" high units extend over the doorway.
- Lightweight, aluminum frame, painted as specified, with a ribbed Lexan insert.
- The sliding door extends 6" into opening when fully open, and stands a total of 2-1/2" off panel face. These dimensions should be taken into consideration when planning for ADA door openings and aisle dimensional requirements if door is mounted on outside of office.
- Actual door thickness is 5/8".
- Actual door width is opening size +6".
- Only mount externally.
- Doors can only be locked from the outside, when user is out of office.
- Optional handles and wall termination brackets are available separately.

Linear Sliding Privacy Screen Handles and Brackets

| LINEAR SLIDING PRIVACY SCREEN HANDLE KIT                                          |       | LINEAR SLIDING PRIVACY SCREEN WALL BRACKET KIT                                      |                                                                                                                                                                                                                                                                                             |               |
|-----------------------------------------------------------------------------------|-------|-------------------------------------------------------------------------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|---------------|
| Model Number                                                                      | List  | Model Number                                                                        | List                                                                                                                                                                                                                                                                                        | Grade C Paint |
| P-UNSLDHK                                                                         | 81    | A-RPSLWATB                                                                          | 75                                                                                                                                                                                                                                                                                          | +25           |
|  |       |  |                                                                                                                                                                                                                                                                                             |               |
| Specify                                                                           | Notes | Specify                                                                             | Notes                                                                                                                                                                                                                                                                                       |               |
|                                                                                   |       |                                                                                     | <ul style="list-style-type: none"><li>• Use this bracket where the top guide rail of the Linear Sliding Privacy Screen extends over the doorway and terminates against a wall instead of a panel.</li><li>• Fasteners for top rail included, fasteners for wall are not included.</li></ul> |               |

## Corner and Straight HiLo Kits

## UNIVERSAL CORNER HILO KITS


| Model Number | List | Grade C Paint |
|--------------|------|---------------|
| P-SAHILORAC  | 101  | +5            |



| Specify           | Notes                                                                                                                                                                                                                                                                                                                                                                                                                                   |
|-------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| • Paint Selection | <ul style="list-style-type: none"> <li>• Universal Corner HiLo Kits are designed to be used as a corner HiLo solution that attaches below the height of the top of the low panel to allow an overhead to mount on the top panel.</li> <li>• Order one kit per "inside" 90 degree connection.</li> <li>• Universal Corner HiLo Kit allows Flipper Door Unit to hang on 65" high panel adjacent to 53" Corner HiLo connection.</li> </ul> |

## UNIVERSAL STRAIGHT HILO KITS


| Model Number | List | Grade C Paint |
|--------------|------|---------------|
| P-SAHILOS    | 101  | +5            |



| Specify           | Notes                                                                                                                                                                                                                                                                                                                                                                       |
|-------------------|-----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| • Paint Selection | <ul style="list-style-type: none"> <li>• Universal Straight HiLo Kits are designed to be used as a straight HiLo solution that allows the use of an overhead on the high panel and is completely hidden from view once installed.</li> <li>• Universal Corner HiLo Kit allows Flipper Door Unit to hang on 65" high panel adjacent to 53" Corner HiLo connection</li> </ul> |

## STANDARD CORNER HILO KITS


| Low Panel | Model Number | List | Grade C Paint |
|-----------|--------------|------|---------------|
| 41        | P-SAHILOC41  | 101  | +5            |
| 53        | P-SAHILOC53  | 101  | +5            |
| 65        | P-SAHILOC65  | 101  | +5            |



| Specify           | Notes                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                               |
|-------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| • Paint Selection | <ul style="list-style-type: none"> <li>• Standard Corner HiLo Kits contain all the hardware needed to connect panels of unequal height at a 90° angle.</li> <li>• These packages must be ordered separately.</li> <li>• There are three versions of these brackets.</li> <li>• Specify the version that corresponds with the height of the low panel.</li> <li>• These brackets are "handed" and are sold in pairs.</li> <li>• Each package contains one right hand bracket, one left hand bracket and two panel screws.</li> </ul> |

## STANDARD STRAIGHT HILO KITS

| Low Panel | Model Number | List | Grade C Paint |
|-----------|--------------|------|---------------|
| 41        | P-SAHILOS41  | 101  | +5            |
| 53        | P-SAHILOS53  | 101  | +5            |
| 65        | P-SAHILOS65  | 101  | +5            |




| Specify           | Notes                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                           |
|-------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| • Paint Selection | <ul style="list-style-type: none"> <li>• Standard Straight HiLo Kits contain all the hardware needed to connect panels of unequal height at a straight connection.</li> <li>• These packages must be ordered separately.</li> <li>• There are three versions of these brackets.</li> <li>• Specify the version that corresponds with the height of the low panel.</li> <li>• These brackets are "handed" and are sold in pairs.</li> <li>• Each package contains one right hand bracket, one left hand bracket and two panel screws.</li> </ul> |

Porkchop and Wall Mount Kits

PORKCHOP KITS

| Model Number | List |
|--------------|------|
| P-SAPCHP     | 59   |



- Notes
- Porkchop Kits contain all the hardware needed to connect panels of equal height.
  - One package is included with every MWall panel.
  - Order as a separate item only if extra hardware is desired.
  - For connecting panels of unequal height, see “HiLo brackets”.

WALL MOUNT KIT

| Model Number | List |
|--------------|------|
| P-SAWM       | 72   |




- Notes
- Wall Mount Kits, are used to attach panels of all heights perpendicular to fixed walls.
  - These packages must be ordered separately from panels.
  - Order one package per panel wall mount situation.
  - Packages include two wall mount “L” brackets, one panel screw and one pin.
  - Packages include all hardware required to mount the brackets to the panel.
  - Hardware to mount the brackets to the wall is not included.
  - Use hardware appropriate to wall type.
  - Wall Mount adds 1/4” to 1/2” in length.
  - Available in black only.

Equal Height Post Fillers


2-WAY EQUAL HEIGHT POST FILLER

| Panel H | Model Number | List | Grade C Paint |
|---------|--------------|------|---------------|
| 41      | P-SAPF2E41   | 293  | +10           |
| 53      | P-SAPF2E53   | 316  | +10           |
| 65      | P-SAPF2E65   | 337  | +10           |
| 80      | P-SAPF2E80   | 347  | +10           |



3-WAY EQUAL HEIGHT POST FILLER

| Panel H | Model Number | List | Grade C Paint |
|---------|--------------|------|---------------|
| 41      | P-SAPF3E41   | 242  | +10           |
| 53      | P-SAPF3E53   | 249  | +10           |
| 65      | P-SAPF3E65   | 263  | +10           |
| 80      | P-SAPF3E80   | 286  | +10           |



4-WAY EQUAL HEIGHT POST FILLER

| Model Number | List | Grade C Paint |
|--------------|------|---------------|
| P-SAPF4E     | 113  | +10           |



Specify

- Paint Selection


Notes

- Post Fillers are used to cover wires in the vertical cavities created when two or more panels are joined at 90° angles.
- Post fillers are not needed for panel connection, stability, or structural integrity.
- Use as needed only for vertical wire management.

## Unequal Height Post Fillers


## 2-WAY UNEQUAL HEIGHT POST FILLER

| Panel H | Model Number | List | Grade C Paint |
|---------|--------------|------|---------------|
| 41, 53  | P-SAPF24153  | 445  | +10           |
| 41, 65  | P-SAPF24165  | 468  | +10           |
| 41, 80  | P-SAPF24180  | 462  | +10           |
| 53, 65  | P-SAPF25365  | 482  | +10           |
| 53, 80  | P-SAPF25380  | 505  | +10           |
| 65, 80  | P-SAPF26580  | 505  | +10           |




## 3-WAY UNEQUAL HEIGHT POST FILLER - SITUATION #1

| Panel H | Model Number | List | Grade C Paint |
|---------|--------------|------|---------------|
| 41, 53  | P-SAPF314153 | 414  | +10           |
| 41, 65  | P-SAPF314165 | 438  | +10           |
| 41, 80  | P-SAPF314180 | 437  | +10           |
| 53, 65  | P-SAPF315365 | 438  | +10           |
| 53, 80  | P-SAPF315380 | 437  | +10           |
| 65, 80  | P-SAPF316580 | 455  | +10           |




## 3-WAY UNEQUAL HEIGHT POST FILLER - SITUATION #2

| Panel H | Model Number | List | Grade C Paint |
|---------|--------------|------|---------------|
| 41, 53  | P-SAPF324153 | 414  | +10           |
| 41, 65  | P-SAPF324165 | 438  | +10           |
| 41, 80  | P-SAPF324180 | 436  | +10           |
| 53, 65  | P-SAPF325365 | 438  | +10           |
| 53, 80  | P-SAPF325380 | 462  | +10           |
| 65, 80  | P-SAPF326580 | 455  | +10           |



## 3-WAY UNEQUAL HEIGHT POST FILLER - SITUATION #3

| Panel H | Model Number | List | Grade C Paint |
|---------|--------------|------|---------------|
| 41, 53  | P-SAPF334153 | 398  | +10           |
| 41, 65  | P-SAPF334165 | 424  | +10           |
| 41, 80  | P-SAPF334180 | 421  | +10           |
| 53, 65  | P-SAPF335365 | 421  | +10           |
| 53, 80  | P-SAPF335380 | 421  | +10           |
| 65, 80  | P-SAPF336580 | 413  | +10           |



## Specify

- Paint Selection


## Notes

- Post Fillers are used to cover wires in the vertical cavities created when two or more panels are joined at 90° angles.
- Post fillers are not needed for panel connection, stability, or structural integrity.
- Use as needed only for vertical wire management.
- Unequal height post fillers do not come with structural hilo connectors. Please order hilo connectors separately.

## Unequal Height Post Fillers


## 3-WAY UNEQUAL HEIGHT POST FILLER - SITUATION #4

| Panel H    | Model Number   | List | Grade C Paint |
|------------|----------------|------|---------------|
| 41, 53, 65 | P-SAPF34415365 | 587  | +10           |
| 41, 53, 80 | P-SAPF34415380 | 577  | +10           |
| 41, 65, 80 | P-SAPF34416580 | 577  | +10           |
| 53, 65, 80 | P-SAPF34536580 | 576  | +10           |




## 3-WAY UNEQUAL HEIGHT POST FILLER - SITUATION #5

| Panel H    | Model Number   | List | Grade C Paint |
|------------|----------------|------|---------------|
| 41, 53, 65 | P-SAPF35415365 | 555  | +10           |
| 41, 65, 80 | P-SAPF35416580 | 578  | +10           |
| 53, 65, 80 | P-SAPF35536580 | 577  | +10           |




## 3-WAY UNEQUAL HEIGHT POST FILLER - SITUATION #6

| Panel H | Model Number | List | Grade C Paint |
|---------|--------------|------|---------------|
| 41, 53  | P-SAPF364153 | 395  | +10           |
| 41, 65  | P-SAPF364165 | 414  | +10           |
| 41, 80  | P-SAPF364180 | 438  | +10           |
| 53, 65  | P-SAPF365365 | 413  | +10           |
| 53, 80  | P-SAPF365380 | 438  | +10           |
| 65, 80  | P-SAPF366580 | 435  | +10           |



## 4-WAY UNEQUAL HEIGHT POST FILLER - SITUATION #1

| Panel H | Model Number | List | Grade C Paint |
|---------|--------------|------|---------------|
| 41, 53  | P-SAPF414153 | 291  | +10           |
| 41, 65  | P-SAPF414165 | 285  | +10           |
| 41, 80  | P-SAPF414180 | 296  | +10           |
| 53, 65  | P-SAPF415365 | 274  | +10           |
| 53, 80  | P-SAPF415380 | 291  | +10           |
| 65, 80  | P-SAPF416580 | 294  | +10           |



## Specify

- Paint Selection



## Notes

- Post Fillers are used to cover wires in the vertical cavities created when two or more panels are joined at 90° angles.
- Post fillers are not needed for panel connection, stability, or structural integrity.
- Use as needed only for vertical wire management.
- Unequal height post fillers do not come with structural hilo connectors. Please order hilo connectors separately.

## Unequal Height Post Fillers


## 4-WAY UNEQUAL HEIGHT POST FILLER - SITUATION #2

| Panel H | Model Number | List | Grade C Paint |
|---------|--------------|------|---------------|
| 41, 53  | P-SAPF424153 | 296  | +10           |
| 41, 65  | P-SAPF424165 | 309  | +10           |
| 41, 80  | P-SAPF424180 | 305  | +10           |
| 53, 65  | P-SAPF425365 | 299  | +10           |
| 53, 80  | P-SAPF425380 | 313  | +10           |
| 65, 80  | P-SAPF426580 | 285  | +10           |




## 4-WAY UNEQUAL HEIGHT POST FILLER - SITUATION #3

| Panel H | Model Number | List | Grade C Paint |
|---------|--------------|------|---------------|
| 41, 53  | P-SAPF434153 | 279  | +10           |
| 41, 65  | P-SAPF434165 | 292  | +10           |
| 41, 80  | P-SAPF434180 | 305  | +10           |
| 53, 65  | P-SAPF435365 | 281  | +10           |
| 53, 80  | P-SAPF435380 | 294  | +10           |
| 65, 80  | P-SAPF436580 | 285  | +10           |




## 4-WAY UNEQUAL HEIGHT POST FILLER - SITUATION #4

| Panel H        | Model Number    | List | Grade C Paint |
|----------------|-----------------|------|---------------|
| 41, 53, 65, 80 | P-SAPF441536580 | 566  | +10           |



## 4-WAY UNEQUAL HEIGHT POST FILLER - SITUATION #5

| Panel H    | Model Number   | List | Grade C Paint |
|------------|----------------|------|---------------|
| 41, 53, 65 | P-SAPF45415365 | 415  | +10           |
| 41, 53, 80 | P-SAPF45415380 | 437  | +10           |
| 41, 65, 80 | P-SAPF45416580 | 436  | +10           |
| 53, 65, 80 | P-SAPF45536580 | 425  | +10           |



## Specify

- Paint Selection


## Notes

- Post Fillers are used to cover wires in the vertical cavities created when two or more panels are joined at 90° angles.
- Post fillers are not needed for panel connection, stability, or structural integrity.
- Use as needed only for vertical wire management.
- Unequal height post fillers do not come with structural hilo connectors. Please order hilo connectors separately.

## Unequal Height Post Fillers, End of Run Post Fillers and Wall Tracks


## 4-WAY UNEQUAL HEIGHT POST FILLER - SITUATION #6

| Panel H | Model Number | List | Grade C Paint |
|---------|--------------|------|---------------|
| 41, 53  | P-SAPF464153 | 281  | +10           |
| 41, 65  | P-SAPF464165 | 293  | +10           |
| 41, 80  | P-SAPF464180 | 306  | +10           |
| 53, 65  | P-SAPF465365 | 285  | +10           |
| 53, 80  | P-SAPF465380 | 296  | +10           |
| 65, 80  | P-SAPF466580 | 287  | +10           |



## 4-WAY UNEQUAL HEIGHT POST FILLER - SITUATION #7

| Panel H    | Model Number   | List | Grade C Paint |
|------------|----------------|------|---------------|
| 41, 53, 65 | P-SAPF47415365 | 415  | +10           |
| 41, 53, 80 | P-SAPF47415380 | 437  | +10           |
| 41, 65, 80 | P-SAPF47416580 | 437  | +10           |
| 53, 65, 80 | P-SAPF47536580 | 426  | +10           |



## Specify


- Paint Selection

## Notes

- Post Fillers are used to cover wires in the vertical cavities created when two or more panels are joined at 90° angles.
- Post fillers are not needed for panel connection, stability, or structural integrity.
- Use as needed only for vertical wire management.
- Unequal height post fillers do not come with structural hilo connectors. Please order hilo connectors separately.

## END OF RUN POST FILLER

| Panel H | Model Number | List | Grade C Paint |
|---------|--------------|------|---------------|
| 41      | P-SAPFE41    | 291  | +10           |
| 53      | P-SAPFE53    | 305  | +10           |
| 65      | P-SAPFE65    | 327  | +10           |
| 80      | P-SAPFE80    | 357  | +10           |



## Specify

- Paint Selection

## Notes

- Post Fillers are used to cover wires in the vertical cavities created when two or more panels are joined at 90° angles.
- Post fillers are not needed for panel connection, stability, or structural integrity.
- Use as needed only for vertical wire management.

## WALL TRACK

| H  | Model Number | List | Grade C Paint |
|----|--------------|------|---------------|
| 60 | A-WTRK60     | 179  | +5            |
| 80 | A-WTRK80     | 216  | +5            |



## Specify

- Paint Selection


## Notes

- Wall Track mounts to fixed walls to provide slotted channel for worksurface support brackets, tackboards or shelves.
- Slots are on 1" vertical repeat pattern.
- Wall track mounting holes are 1/4" diameter, repeating 6" on center starting 1/2" from top of track.
- Hardware for mounting Wall Track to walls is not included. Use hardware appropriate to wall type.
- **Important:** Wall track may not be shared between shelf units, flipper door units, or tackboards.
- **Important:** Wall track may be shared with Matrix and AO2 storage. Wall track may not be shared with Divi and MWall storage.

Base Raceway Shrouds, Topcap Raceway Shrouds

2-WAY BASE RACEWAY SHROUD


| Model Number | List | Grade C Paint |
|--------------|------|---------------|
| A-SACRWC     | 166  | +10           |



| Specify           | Notes                                                                                                                                                                                                                                                                                                                                                                                                                                       |
|-------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| • Paint Selection | <ul style="list-style-type: none"><li>• 2-Way Base Raceway Shroud is used to mask electrical cables and/or data cables that may be exposed at a 2-way, 90° connection.</li><li>• Unit snaps on securely.</li><li>• Note: Base raceway shroud is not required for structural integrity and is not needed at every 2-way connection.</li><li>• Use only when necessary to mask cables.</li><li>• Intended for 90° connections only.</li></ul> |

3-WAY BASE RACEWAY SHROUD


| Model Number | List | Grade C Paint |
|--------------|------|---------------|
| A-SATRWC     | 126  | +10           |



| Specify           | Notes                                                                                                                                                                                                                                                                                                                                                                                                                                 |
|-------------------|---------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| • Paint Selection | <ul style="list-style-type: none"><li>• 3-Way Base Raceway Shroud is used to mask electrical cables and/or data cables that may be exposed at a 3-way, 90° connection.</li><li>• Unit snaps on securely.</li><li>• Base raceway shroud is not required for structural integrity and is not needed at every 3-way connection.</li><li>• Use only when necessary to mask cables.</li><li>• Intended for 90° connections only.</li></ul> |

2-WAY TOPCAP RACEWAY SHROUD


| Model Number | List | Grade C Paint |
|--------------|------|---------------|
| A-SA2WTC     | 78   | +10           |



| Specify           | Notes                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|-------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| • Paint Selection | <ul style="list-style-type: none"><li>• 2-Way Topcap Raceway Shrouds are used to mask data cables that may be exposed at a 2-way, 90° connection.</li><li>• Unit screws to the top of the panels with panel screws.</li><li>• Topcap raceway shroud is not required for structural integrity and is not needed at every 2-way connection.</li><li>• Use only when necessary to mask cables.</li><li>• Intended for 90° connections only.</li></ul> |

3-WAY TOPCAP RACEWAY SHROUD

| Model Number | List | Grade C Paint |
|--------------|------|---------------|
| A-SA3WTC     | 145  | +10           |




| Specify           | Notes                                                                                                                                                                                                                                                                                                                                                                                                                                              |
|-------------------|----------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| • Paint Selection | <ul style="list-style-type: none"><li>• 3-Way Topcap Raceway Shrouds are used to mask data cables that may be exposed at a 3-way, 90° connection.</li><li>• Unit screws to the top of the panels with panel screws.</li><li>• Topcap raceway shroud is not required for structural integrity and is not needed at every 3-way connection.</li><li>• Use only when necessary to mask cables.</li><li>• Intended for 90° connections only.</li></ul> |


## MWall Electrical Product Details

### Product Detail 1 Electrical Components (8 Wire, 4 Circuit)

AIS MWall 8 Wire 4 Circuit electrical system contains four circuits. Each circuit is rated at 20 amps/120 volts maximum. Circuit 1, Circuit 2 and Circuit 3 are served by a system neutral and an equipment ground. Circuit 4 is dedicated and is served by its own neutral and ground. Circuit and ground conductors are #12 A.G.W. (gauge). All neutrals are #10 A.G.W. (gauge).


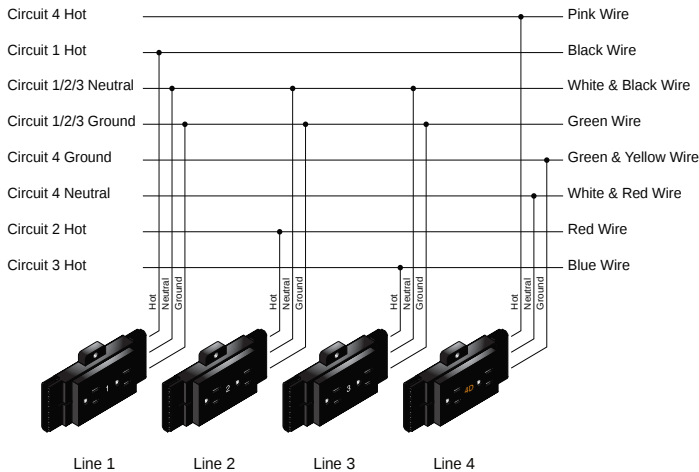


Shown below is cross section of metal cable used for 8 Wire 4 Circuit jumpers and in-feeds. Circuit and ground conductors are #12 A.G.W. (gauge). All neutrals are #10 A.G.W. (gauge).

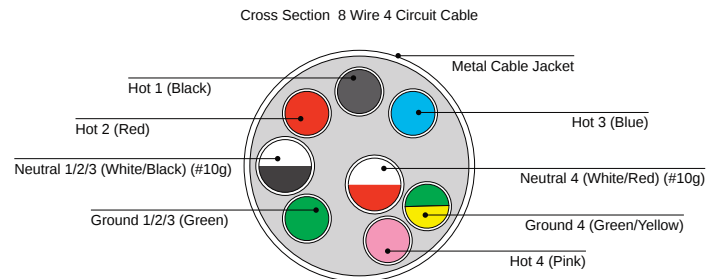

Powerways provide electrical distribution and access for duplex outlets back to back. 24" wide panels can accept only one duplex outlet per side, two total back to back. All other panels can accept two per side, four total back to back. Powerways "grow" in length with panels of greater width, making panel to panel connections a "standard" configuration and allowing for "pass through" connections. Each powerway has locations for up to four jumpers, two at each end. Powerways are included when ordering powered panels.

Duplex Outlets are available designated circuits 1 thru 4. Each duplex outlet contains two single receptacles (places to plug into) of the same circuit and are specified separately from powerways. All duplex outlets have black faces. The lettering on outlets for Circuit 1, 2 and 3 is white. The lettering on outlets for Circuit 4 is orange. Outlets are screw mounted to powerway. Duplex outlets are standard 15 amp outlets. For 20 amp outlets, call AIS Customer Service.

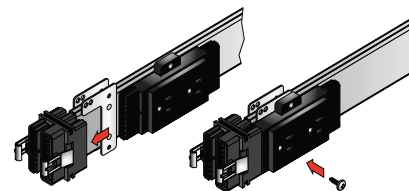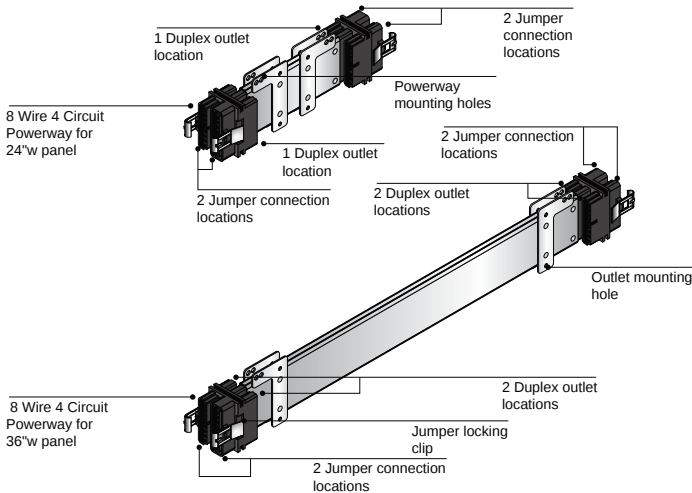


**Common Equipment Amperages:**

|                   |                    |
|-------------------|--------------------|
| Personal Computer | ..... 2.00 - 4.00  |
| Laser Printer     | ..... 5.00 - 8.00  |
| Desktop Plotter   | ..... 1.50         |
| Fan               | ..... 1.00         |
| Heater            | ..... 8.50 - 12.50 |
| Tasklight         | ..... 1.00         |
| Slide Projector   | ..... 2.00 - 6.00  |
| Coffee Pot        | ..... 15.00        |
| Paper Shredder    | ..... 4.40 - 13.00 |
| Radio             | ..... 0.05         |
| Pencil Sharpener  | ..... 1.00         |
| Calculator        | ..... 0.25         |
| Answering Machine | ..... 0.08         |

## MWall Electrical Product Details


Product Detail 2  
Beltline Electrical Components

Electrical components for the beltline raceway are the same as for the base raceway applications. Electrical specifications for straights, 2-way, 3-way, 4-way, and pass-through conditions are detailed on previous pages. For transitions from base raceway to beltline raceway, see facing page.

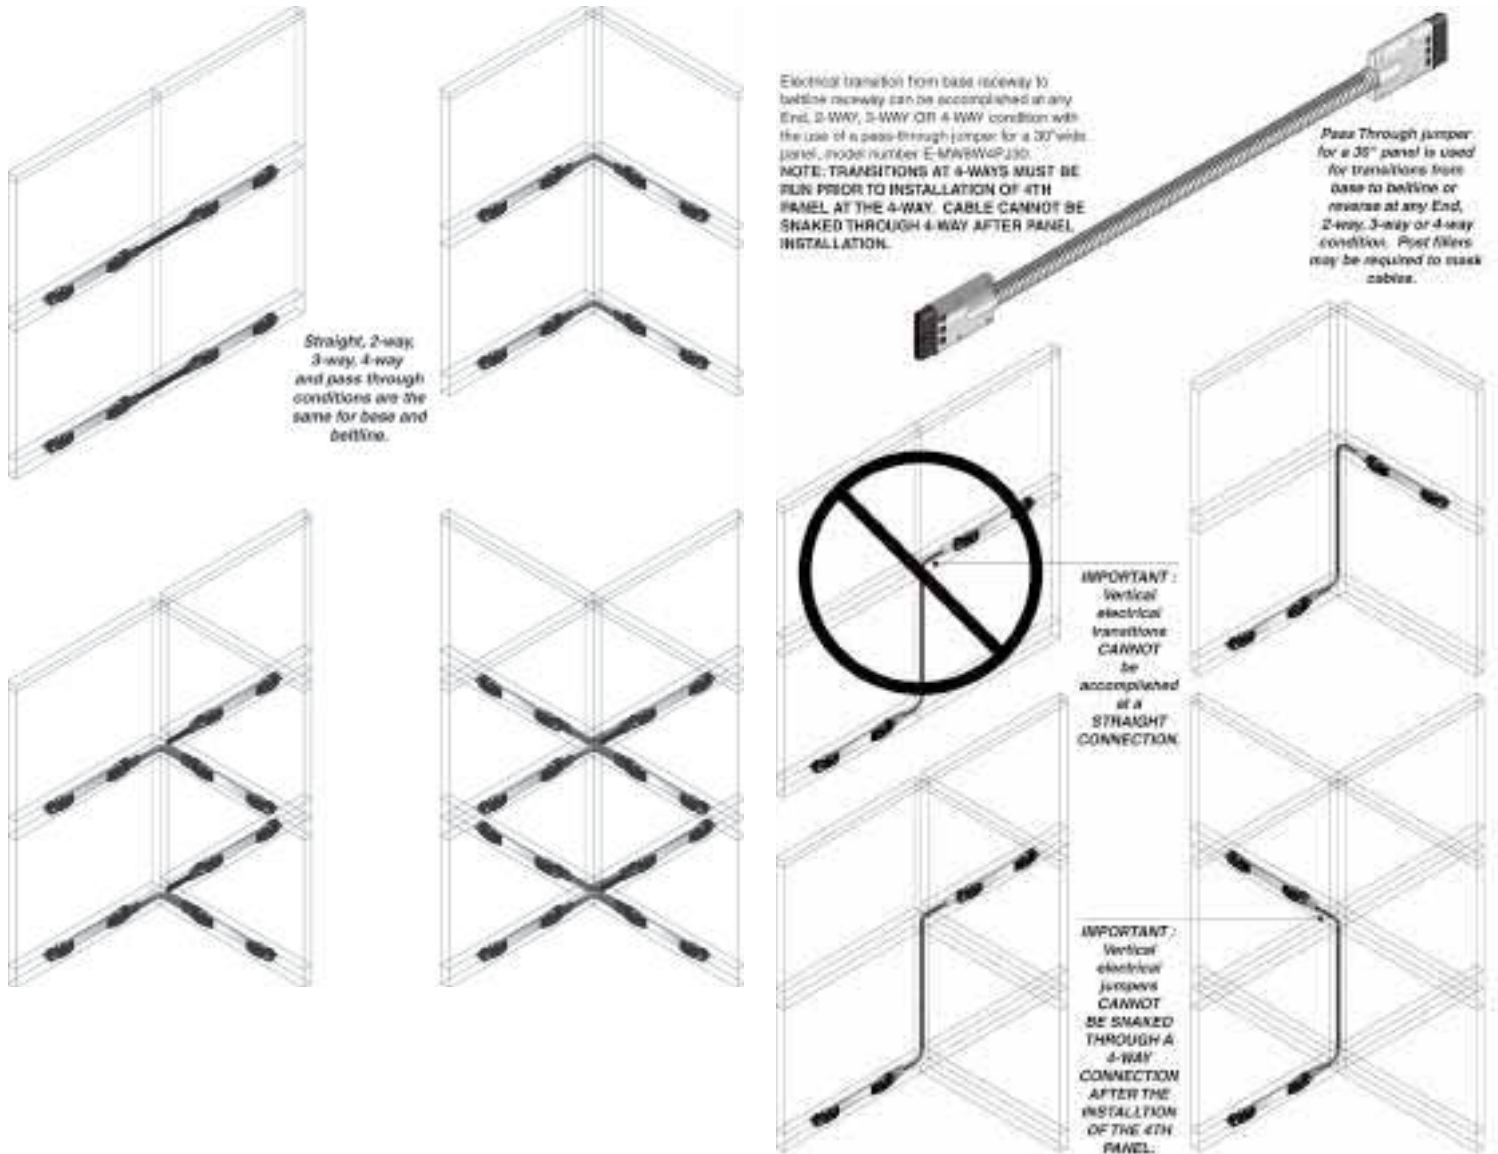

## MWall Electrical Product Details

### Product Detail 3 Double Channel Power/Data Pole

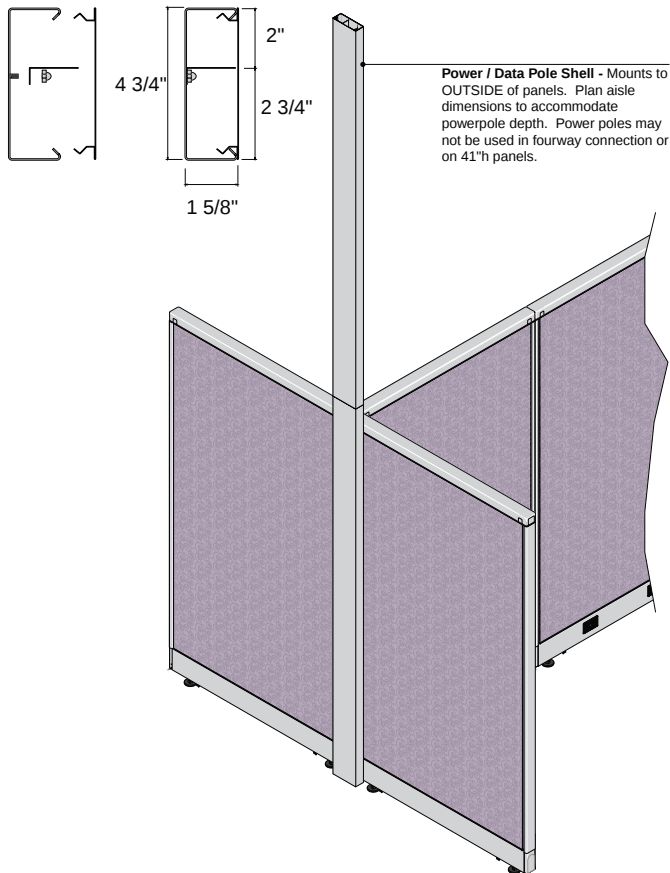

**Grid attachment strip** - 72" length can be cut to fit and bolted to pole and ceiling grid with hardware provided.


**Pole Cover** - Snaps in place to seal vertical channel.

**Divider** - Attaches to pole shell threaded studs with rounded safety "acorn" nuts. Divider may be mounted on centered or 60/40 split to accommodate more data cables.

**Pole Coupler** - Slides into both halves of pole. Four threaded screws are tightened to form rigid pressure fit.

**Mounting brackets** - Engage opposed on panel hanger frames to lock lower section of pole to panel. Bracket threaded studs and rounded safety "acorn" nuts attach pole to brackets.

**Pole Shell** - is relieved on one end to provide means of egress for data cables and ceiling feeds. Pole top and bottom sections are identical.

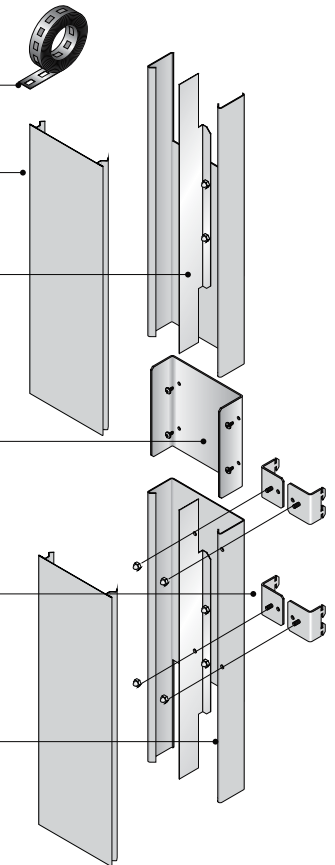


## MWall Electrical Product Details

Product Detail 4  
In-Line Power/Data Pole



## Conditions

Inline Pole conditions include end of run, 2-way, 3-way and 4-way situations. In-Line Poles may not be used at a Straight, Panel to Panel Connection.




## Inline Pole Cross-sections

Inline pole capacity varies with post filler situations. 24-32 cables max. Only 2-way equal height, 3-way equal height and 4-way equal height conditions can accommodate (2) Ceiling In-Feeds. Cross-section dimensions below are worst case conditions with post filler bracket restrictions.

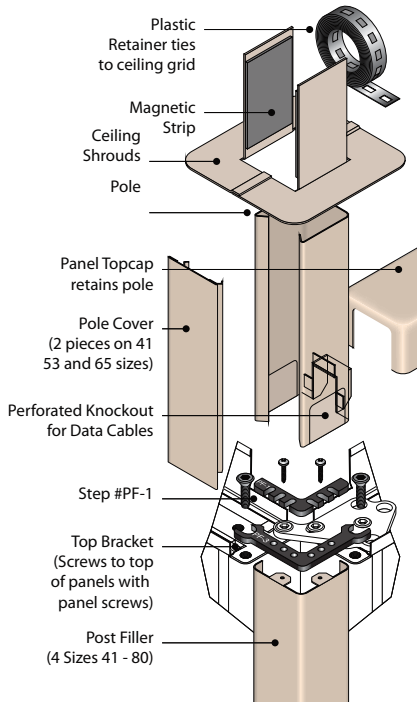


Pressure collar securely attaches Inline Pole to Extension

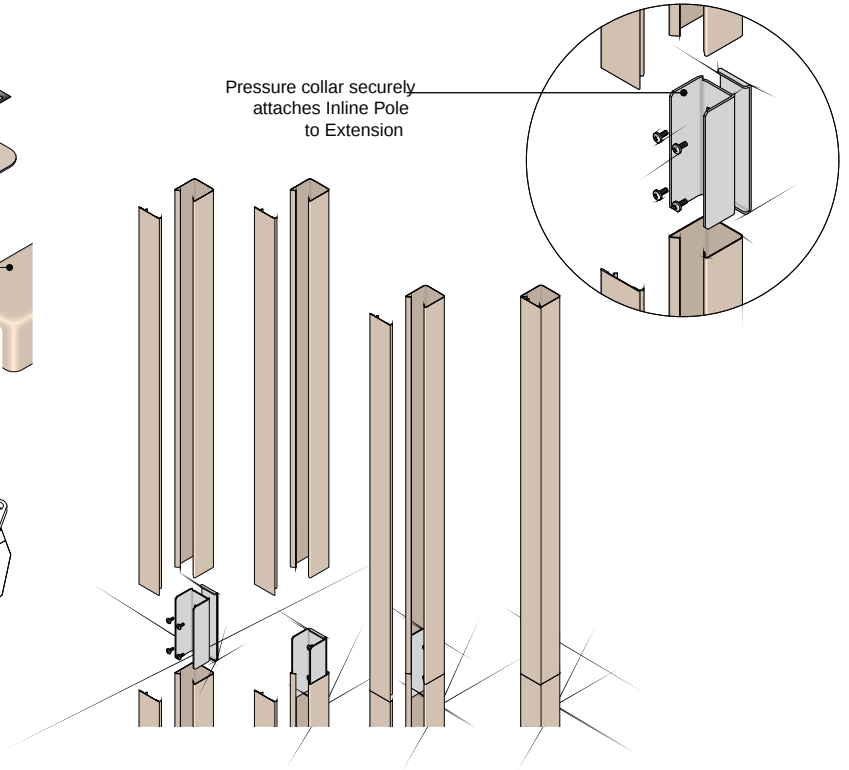

## Panel-to-Panel and Lateral Jumpers


## STANDARD PANEL-TO-PANEL JUMPERS

| L  | Model Number  | List |
|----|---------------|------|
| 18 | E-MX8W4PTPC18 | 212  |



## EXTENDED PANEL-TO-PANEL JUMPERS

| L  | Model Number  | List |
|----|---------------|------|
| 21 | E-MX8W4PTPC21 | 222  |




## Notes

- Panel-to-Panel Jumper connects any two adjacent powered panels connected in a straight line or at a 90° angle.
- Order an Extended Panel-to-Panel Jumper to connect any two powered panels across the gap created by a 3-way or 4-way connection.
- 90° corners and straight panel-to-panel connections do not require an extended jumper.

## LATERAL PASS THROUGH JUMPERS

| Panel W | Actual L | Model Number | List |
|---------|----------|--------------|------|
| 18      | 37       | E-MW8W4PJ18  | 272  |
| 24      | 43       | E-MW8W4PJ24  | 303  |
| 30      | 49       | E-MW8W4PJ30  | 324  |
| 36      | 55       | E-MW8W4PJ36  | 334  |
| 42      | 61       | E-MW8W4PJ42  | 345  |
| 48      | 67       | E-MW8W4PJ48  | 372  |
| 60      | 79       | E-MW8W4PJ60  | 400  |




## Notes

- Lateral Pass Through Jumpers pass through a non-powered panel to connect two powered panels.
- Specify the jumper that corresponds to the width of the panel to be passed through.

## EXTENDED LATERAL PASS THROUGH JUMPERS

| Panel W | Actual L | Model Number | List |
|---------|----------|--------------|------|
| 18      | 39       | E-MW8W4PJ18E | 332  |
| 24      | 45       | E-MW8W4PJ24E | 315  |
| 30      | 51       | E-MW8W4PJ30E | 331  |
| 36      | 57       | E-MW8W4PJ36E | 342  |
| 42      | 63       | E-MW8W4PJ42E | 351  |
| 48      | 69       | E-MW8W4PJ48E | 382  |
| 60      | 81       | E-MW8W4PJ60E | 421  |




## Notes

- Extended Lateral Pass Through Jumpers are extended 1 11/16" to pass through a non-powered panel and the additional gap created by a 3-way or 4-way connection to connect two powered panels.
- 90° corners and straight panel-to-panel connections do not require an extended jumper.
- Specify the jumper that corresponds to the width of the panel to be passed through.

## Duplex Outlets



## DUPLEX OUTLETS

| Line | Color | Model Number | List |
|------|-------|--------------|------|
| 1    | Black | E-MW8W4DO1   | 78   |
| 2    | Black | E-MW8W4DO2   | 78   |
| 3    | Black | E-MW8W4DO3   | 78   |
| 4    | Black | E-MW8W4DO4   | 78   |
| 1    | White | E-MW8W4DO1-W | 78   |
| 2    | White | E-MW8W4DO2-W | 78   |
| 3    | White | E-MW8W4DO3-W | 78   |
| 4    | White | E-MW8W4DO4-W | 78   |



## CALIFORNIA TITLE 24 CONTROLLED DUPLEX OUTLETS

| Line | Color | Model Number    | List |
|------|-------|-----------------|------|
| 1    | Black | E-MW8W4T24DO1   | 90   |
| 2    | Black | E-MW8W4T24DO2   | 90   |
| 3    | Black | E-MW8W4T24DO3   | 90   |
| 4    | Black | E-MW8W4T24DO4   | 90   |
| 1    | White | E-MW8W4T24DO1-W | 90   |
| 2    | White | E-MW8W4T24DO2-W | 90   |
| 3    | White | E-MW8W4T24DO3-W | 90   |
| 4    | White | E-MW8W4T24DO4-W | 90   |



## Notes

- Duplex Outlets are available at designated circuits 1 through 4.
- Each duplex outlet contains two single receptacles (places to plug into) of the same circuit and are specified separately from powerways.
- Available in black or white. The lettering on outlets for Circuit 1, 2 and 3 is white. The lettering on outlets for Circuit 4 is orange.
- Outlets are screw mounted to powerway.
- Duplex outlets are standard 15 amp outlets.
- Can be used with multi-circuit electrical units.

## Notes


- In California, 50 percent of all outlets in a systems panel cluster or benching cluster, for new construction, MUST be controlled outlets, even if there is no task lighting.
- Customers should plan on using circuits 2 and 3 for controlled circuits, and plan general load for all other items on circuits 1 and 4.
- If using 2 + 2 configuration, controlled circuits should be 1 and 2, and general load circuits on 4 and 5.
- Outlets must have the “controlled” symbol for identification purposes.
- Can be used with multi-circuit electrical units.

**Note:** Certain areas of Chicago prohibit the use of modular electrical systems and require all electrical components to be hardwired. All electrical components need to be supplied by the electrician.

## Duplex Outlets

## USB OUTLETS

| Line | Color | Model Number   | List |
|------|-------|----------------|------|
| 1    | Black | E-UN8W4USB01   | 317  |
| 2    | Black | E-UN8W4USB02   | 317  |
| 3    | Black | E-UN8W4USB03   | 317  |
| 4    | Black | E-UN8W4USB04   | 317  |
| 1    | White | E-UN8W4USB01-W | 283  |
| 2    | White | E-UN8W4USB02-W | 283  |
| 3    | White | E-UN8W4USB03-W | 283  |
| 4    | White | E-UN8W4USB04-W | 283  |




## Notes

- USB Outlets bring charging options to panel power distribution systems.
- The USB Outlets provide convenient charging power access through dual ports on the face of the receptacle.
- The USB Outlets offer a total of 2 Amps between two USB charging ports.
- The USB Outlets are UL and FCC Part 15A approved.
- Can be used with multi-circuit electrical units.

## DUPLEX OUTLET HOLE COVERS

| Model Number | List |
|--------------|------|
| E-UNWC       | 30   |



## Specify

- Paint Selection for Hole Cover


## Notes

- Duplex Outlet Hole Covers are supplied with each powered panel to cover unused duplex outlet locations (six).
- 24"W panels only include three duplex outlet hole covers.
- Order extra hole covers separately only when required.
- Can be used with multi-circuit electrical units.

## Side Mounted, Receptacle Mount and Ceiling In-Feeds



## SIDE MOUNTED BASE IN-FEEDS

| Length | Model Number | List |
|--------|--------------|------|
| 72     | E-UN8W4BIFS  | 493  |



## NEW YORK CITY SIDE MOUNTED BASE IN-FEEDS

| Length | Model Number  | List |
|--------|---------------|------|
| 72     | E-HM8W4BIFSNY | 980  |




## Notes

- Side Mounted Base In-Feeds provide interface with building power at the base of the panel and mounts to powerway at jumper location.
- Each base feed is 6' in length, encased in "liquid tight".
- New York City code requires the use of a special base feed with an in-line junction box.



## RECEPTACLE MOUNT BASE IN-FEEDS

| Length | Hand  | Model Number | List |
|--------|-------|--------------|------|
| 72     | Left  | E-UN8W4BIFL  | 529  |
| 72     | Right | E-UN8W4BIFR  | 529  |



## NEW YORK CITY RECEPTACLE MOUNT BASE IN-FEEDS

| Length | Hand  | Model Number  | List  |
|--------|-------|---------------|-------|
| 72     | Left  | E-HM8W4BIFLNY | 1,028 |
| 72     | Right | E-HM8W4BIFRNY | 1,028 |




## Notes

- Receptacle Mounted Base In-Feeds provide interface with building power and mounts to powerway at duplex outlet location.
- Each base in-feed is 6' in length, encased in "liquid tight".
- Left hand base in-feed shown.

## CEILING IN-FEEDS

| Length | Model Number | List |
|--------|--------------|------|
| 144    | E-UN8W4CIF   | 577  |



## Notes


- Ceiling In-Feeds provide interface with building power from a suspended ceiling through a power pole shell.
- Each ceiling feed is 12' long.
- Power pole shells are ordered separately.

**Note:** Certain areas of Chicago prohibit the use of modular electrical systems and require all electrical components to be hardwired. All electrical components need to be supplied by the electrician.

## Pole Kits

## IN-LINE POWER/DATA POLE KIT

| Panel H | Model Number | List | Grade C Paint |
|---------|--------------|------|---------------|
| 41      | P-SAPFPP41   | 618  | +10           |
| 53      | P-SAPFPP53   | 549  | +10           |
| 65      | P-SAPFPP65   | 576  | +10           |
| 80      | P-SAPFPP80   | 485  | +10           |



## Specify

## Notes

## • Paint Selection

- In-Line Power/Data Pole Kits are designed to install on top of a post filler in any situation.
- The in-line poles are designed with the same 1.7" x 1.7" profile of a post filler and are 136" tall.
- Pole kit does not include an electrical junction box.
- Designed for an 11' ceiling.
- Post filler must be specified separately based on the appropriate situation.
- Pole fits over "step" and is retained by a panel topcap.
- Order the pole that corresponds to the highest panel in the post filler situation.

## IN-LINE POLE EXTENSION KIT

| Panel H | Model Number | List | Grade C Paint |
|---------|--------------|------|---------------|
| 28      | P-SAPFIPX28  | 362  | +10           |
| 38      | P-SAPFIPX38  | 444  | +10           |



## Specify


## Notes

## • Paint Selection

- In-Line Pole Extension Kits extend an in-line pole 28" or 38" for raised suspended ceilings.
- A 28" extension achieves a 13 1/2'. 38" extension achieves 14 1/2'.
- Extension includes pressure collar that rigidly attaches extension to an In-Line Pole.

## DOUBLE CHANNEL POWER/DATA POLE KIT

| Model Number | List | Grade C Paint |
|--------------|------|---------------|
| A-PPDCSA     | 749  | +20           |



## Specify

## Notes


## • Paint Selection

- Double Channel Power/Data Pole Kit includes two 68" pole sections, two 68" covers, one pole coupler, two 68" dividers, four pole to panel mounting brackets, one ceiling shroud, one 72" length of perforated metal strip for attaching pole to ceiling grid, and mounting hardware.
- Order ceiling feeds separately.
- Designed for an 11' ceiling.

## Dataport Boxes and Retrofit Kits

## DATAPORT BOXES WITH VERTICAL WIRE MANAGER

| Panel H | Model Number | List | Grade C Paint |
|---------|--------------|------|---------------|
| 41      | A-SAVWMJB41  | 523  | +10           |
| 53      | A-SAVWMJB53  | 532  | +10           |
| 65      | A-SAVWMJB65  | 547  | +10           |
| 80      | A-SAVWMJB80  | 557  | +10           |



## Specify


- Paint Selection

## Notes

- Dataport Box with Vertical Wire Manager accommodates up to six data/voice cables in transition from MWall topcap raceway to worksurface height.
- Unit mounts to either left or right panel hanger frame (non-handed).
- Standard single gang GFI mounting holes work with many various data device plates.
- Order unit that corresponds to panel height.
- Box is 2" deep and 32" from floor to box bottom.
- Note: This unit is not compatible with MWall Z-Panels. Order data jacks and device plates separately.

## ELECTRICAL RETROFIT KITS

| W  | Model Number | List | Grade C Paint |
|----|--------------|------|---------------|
| 24 | E-FRKMWP8424 | 376  | +10           |
| 30 | E-FRKMWP8430 | 400  | +10           |
| 36 | E-FRKMWP8436 | 416  | +10           |
| 42 | E-FRKMWP8442 | 444  | +10           |
| 48 | E-FRKMWP8448 | 463  | +10           |
| 60 | E-FRKMWP8460 | 507  | +10           |



## Specify

- Color Selection for Base Cover


## Notes

- Electrical Retrofit Kits are for field retrofitting existing non-powered MWall panels with 8 wire, 4 circuit electrical.
- Kit includes one powerway with mounting clips and screws, one powered base cover assembly and four duplex outlet hole covers.
- Duplex outlets, jumpers, extra hole covers or feeds are ordered separately.

## Junction Boxes and Data Plate Kits

## HARDWIRE JUNCTION BOX

| Model Number | List |
|--------------|------|
| E-MWJBCH     | 283  |




## Specify

## Notes

- Color Selection for Plate Covers
- Hardwire Junction Box allows standard, hard wired, single gang duplex outlets to be used in MWall panels at each standard, modular duplex outlet location.
- Each outlet will require one junction box and outlets cannot be placed back to back on a spine.
- Junction boxes do not include electrical connectors.
- Boxes are UL listed.
- Decora faced outlets cannot be used.
- Kit includes all hardware required to attach box to MWall panel at duplex outlet location.
- Standard MWall powered base covers are required.
- Order MWall panels with Chicago base cover option.
- Boxes have standard 0.875" knockouts for electrical connectors.
- Kit includes one low profile metal face plate painted per specification.
- Junction boxes can be used with either 15 amp or 20 amp single gang outlets.

## DATA PLATE KITS

| Item                                  | Model Number | List |
|---------------------------------------|--------------|------|
| Snap-In Data Plate w/ Extender Sleeve | A-MWDPEI     | 63   |
| CAT 5e Jack                           | E-HRJ45-SM   | 123  |
| CAT 6 Data Jack                       | E-HXJ6BK-SM  | 134  |
| Hole Blank (10PK)                     | E-SFBB10-SM  | 83   |




## Notes

- Snap-In Housing have six ports.
- Housing is black.
- Housing snaps into AIS standard MWall duplex outlet holes, which measure 1.86" x 3.012".
- RJ-45 jacks can be used in place of RJ-11 jacks.
- Extender Sleeve (Black) is included and extends the data jack housing 5/8" from the base plate allowing more room for data jacks being utilized on powered panels.
- Extender sleeve snaps into the same 1.86" x 3.012" duplex outlet hole.

## Cantilevers and Side Support/Rear Brackets

## STANDARD CANTILEVERS

| Surface Depth | Actual Depth | Hand  | Model Number | List | Grade C Paint |
|---------------|--------------|-------|--------------|------|---------------|
| 24            | 18           | Left  | WPS-UNCT24L  | 94   | +10           |
| 24            | 18           | Right | WPS-UNCT24R  | 94   | +10           |
| 24            | 18           | Pair  | WPS-UNCT24P  | 182  | +20           |
| 30            | 25.5         | Left  | WPS-UNCT30L  | 182  | +10           |
| 30            | 25.5         | Right | WPS-UNCT30R  | 182  | +10           |
| 30            | 25.5         | Pair  | WPS-UNCT30P  | 361  | +20           |



## Specify


- Paint Selection for Cantilevers

## Notes

- Standard Cantilevers provide cantilevered work-surface support from panel or wall track at either the left or right hand side of a worksurface.
- All worksurface support components fasten directly to worksurfaces with screws.
- Standard cantilevers may also be used as a center support.
- Specify cantilever that corresponds to worksurface depth.
- It is highly recommended that flat plates are specified in conjunction with support cantilevers to splice two worksurfaces together at the front edge.
- Painted black as standard, all other trim colors are Grade C upcharged.

## SHARED CANTILEVERS

| Surface Depth | Actual Depth | Hand   | Model Number | List | Grade C Paint |
|---------------|--------------|--------|--------------|------|---------------|
| 24            | 18           | Single | WPS-UNCT24S  | 135  | +10           |
| 24            | 18           | Pair   | WPS-UNCT24SP | 266  | +20           |
| 30            | 25.5         | Single | WPS-UNCT30S  | 266  | +10           |
| 30            | 25.5         | Pair   | WPS-UNCT30SP | 534  | +20           |



## Specify


- Paint Selection for Cantilevers

## Notes

- Shared Cantilevers provide cantilevered support from panel or wall track at seam between two worksurfaces.
- All worksurface support components fasten directly to worksurfaces with screws.
- Specify cantilever that corresponds to worksurface depth.
- It is highly recommended that flat plates are specified in conjunction with support cantilevers to splice two worksurfaces together at the front edge.
- Painted black as standard, all other trim colors are Grade C upcharged.

## SIDE SUPPORT / REAR BRACKETS

| Hand  | Model Number | List | Grade C Paint |
|-------|--------------|------|---------------|
| Left  | WPS-SSSAL    | 69   | +10           |
| Right | WPS-SSSAR    | 69   | +10           |
| Pair  | WPS-SSSA     | 132  | +20           |



## Specify


- Paint Selection for Side Support / Rear Bracket

## Notes

- Side Support/Rear Brackets provide direct support from panel or wall track along short side of rectangular worksurface or at rear of corner worksurface.
- All worksurface support components fasten directly to worksurfaces with screws.
- Painted black as a standard. All other trim colors are Grade C upcharged.

## PANEL MOUNTED SHELF CANTILEVERS

| Surface Depth | Actual Depth | Hand  | Model Number | List | Grade C Paint |
|---------------|--------------|-------|--------------|------|---------------|
| 12            | 10           | Left  | WPS-CT10L    | 170  | +10           |
| 12            | 10           | Right | WPS-CT10R    | 170  | +10           |
| 12            | 10           | Pair  | WPS-CT10P    | 323  | +20           |



## Specify

- Paint Selection


## Notes

- Panel Mounted Shelf Cantilevers are 10"d and designed to work in conjunction with 12"d worksurfaces to create additional desk top shelving.
- Available for all AIS panel systems.
- For use with 12" to 16" worksurfaces only.

## End Panels and Brackets

## STANDARD END PANELS

| D  | Model Number | List | Grade C Laminate |
|----|--------------|------|------------------|
| 12 | WFS-EP12SA12 | 374  | +20              |
| 18 | WFS-EP18SA18 | 437  | +24              |
| 24 | WFS-EP24SA24 | 495  | +27              |
| 30 | WFS-EP30SA30 | 549  | +30              |
| 36 | WFS-EP36SA36 | 625  | +34              |




## Specify Notes

- Laminate Selection for End Panel
- 2mm Edge Selection for End Panel
- Standard End Panels have laminated vertical surfaces and a 2mm PVC vertical front edge.
- Standard end panels provide direct support from floor at left or right side of a worksurface, and engage and lock to panels with provided mounting brackets.
- All worksurface support components fasten directly to worksurfaces with screws.
- Specify end panel that corresponds to worksurface depth.

## CLEAR ACCESS END PANELS

| D  | Model Number | List | Grade C Laminate |
|----|--------------|------|------------------|
| 24 | WFS-EPCASA24 | 518  | +29              |
| 30 | WFS-EPCASA30 | 577  | +32              |



## Specify Notes

- Laminate Selection for End Panel
- 2mm Edge Selection for End Panel
- Clear Access End Panels have laminated vertical surfaces and a 2mm vertical front edge.
- Clear access end panels provide direct support from floor at left or right side of a worksurface, and engage and lock to panels with provided mounting brackets.
- All worksurface support components fasten directly to worksurfaces with screws.

## PEDESTAL-TO-PEDESTAL ATTACHMENT BRACKET

| Model Number | List | Grade C Laminate |
|--------------|------|------------------|
| S-MWMPMB     | 245  | +25              |




## Specify Notes

- Paint Selection
- Pedestal-to-Panel Attachment Brackets attach structural pedestals to panels.
- These brackets serve as a space filler and as a way to add stability to panels.
- Pedestal to panel attachment brackets may only be used when the nominal surface depth matches the nominal pedestal depth (24" Deep surface & 24" deep pedestal or 30" deep surface and 30" deep pedestal).

## COUNTERTOP BRACKETS

| Hand  | Model Number | List | Grade C Paint |
|-------|--------------|------|---------------|
| Left  | WPS-CTBLSA   | 65   | +10           |
| Right | WPS-CTBRSA   | 65   | +10           |
| Pair  | WPS-CTBSA    | 126  | +20           |




## Specify Notes


- Paint Selection for Countertop Bracket
- Countertop Brackets provide direct support from 41"H panel for countertop worksurfaces.
- Specify at least two pair of countertop brackets for every countertop (one pair for front side and one pair for rear).
- All worksurface support components fasten directly to worksurfaces with screws.

MWall Panel Mounted A-Legs


| MWALL PANEL MOUNTED A-LEGS |    |                |                |      | SHARED MWALL PANEL MOUNTED A-LEGS |    |                  |                   |      |
|----------------------------|----|----------------|----------------|------|-----------------------------------|----|------------------|-------------------|------|
|                            |    | Left Hand      | Right Hand     | List |                                   |    | Left Hand Shared | Right Hand Shared | List |
| H                          | D  | Model Number   | Model Number   |      | H                                 | D  | Model Number     | Model Number      |      |
| 27                         | 12 | WFS-ALW2712MWL | WFS-ALW2712MWR | 451  | 27                                | 12 | WFS-ALW2712MWLS  | WFS-ALW2712MWRS   | 483  |
| 27                         | 24 | WFS-ALW2724MWL | WFS-ALW2724MWR | 511  | 27                                | 24 | WFS-ALW2724MWLS  | WFS-ALW2724MWRS   | 546  |
| 27                         | 30 | WFS-ALW2730MWL | WFS-ALW2730MWR | 546  | 27                                | 30 | WFS-ALW2730MWLS  | WFS-ALW2730MWRS   | 578  |




Left Hand



Right Hand




Left Hand Shared




Right Hand Shared


| Specify                                                                             | Notes                                                                                                                                                                                                                                                                                                                                                                                                                                                                                                  |
|-------------------------------------------------------------------------------------|--------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"><li>• Paint Selection (+25 for Grade C)</li></ul> | <ul style="list-style-type: none"><li>• <b>Important:</b> A-Legs cannot be used as freestanding table support. One side must be anchored to a storage element or panel.</li><li>• A-Legs are constructed from 1 x 2 painted steel.</li><li>• Legs have 1 1/2" leveling glides.</li><li>• A-Leg welded construction allows for attachment to the worksurface.</li><li>• Ships installed with panel attachment brackets. Panel locking bracket for panel attachment situations ships separate.</li></ul> |




EXAMPLE 1 - UNSTABLE  
32"H Structural Wing




EXAMPLE 2 - UNSTABLE  
32"H Panel with Cantilever




EXAMPLE 3 - UNSTABLE  
32"H Panel with Cantilevers



EXAMPLE 1 - STABLE  
Standard Structural Wing



EXAMPLE 2 - STABLE  
32"H Panel with Floor Support




EXAMPLE 3 - STABLE  
32"H Panel with Panel Mounted A-Legs


## MWall Panel Mounted O-Legs

| MWALL PANEL MOUNTED O-LEGS |    |                |                |      |
|----------------------------|----|----------------|----------------|------|
|                            |    | Left Hand      | Right Hand     |      |
| H                          | D  | Model Number   | Model Number   | List |
| 27                         | 12 | WFS-OLW2712MWL | WFS-OLW2712MWR | 573  |
| 27                         | 18 | WFS-OLW2718MWL | WFS-OLW2718MWR | 610  |
| 27                         | 24 | WFS-OLW2724MWL | WFS-OLW2724MWR | 653  |
| 27                         | 30 | WFS-OLW2730MWL | WFS-OLW2730MWR | 694  |

| SHARED MWALL PANEL MOUNTED O-LEGS |    |                 |      |
|-----------------------------------|----|-----------------|------|
| H                                 | D  | Model Number    | List |
| 27                                | 12 | WFS-OLW2712MWLS | 616  |
| 27                                | 18 | WFS-OLW2718MWLS | 650  |
| 27                                | 24 | WFS-OLW2724MWLS | 694  |
| 27                                | 30 | WFS-OLW2730MWLS | 737  |



Left Hand









Left Hand

## Specify

## Notes

- Paint Selection (+25 for Grade C)


- **Important:** O-Legs cannot be used as freestanding table support. One side must be anchored to a storage element or panel.
- O-Legs are constructed from 1 x 2 painted steel.
- Legs have 1 1/2" leveling glides.
- O-Leg welded construction allows for attachment to the worksurface.
- Ship installed with panel attachment brackets. Panel locking bracket for panel attachment situations ships separate.

EXAMPLE 1 - UNSTABLE  
32"H Structural WingEXAMPLE 2 - UNSTABLE  
32"H Panel with CantileverEXAMPLE 3 - UNSTABLE  
32"H Panel with CantileversEXAMPLE 1 - STABLE  
Standard Structural WingEXAMPLE 2 - STABLE  
32"H Panel with Floor SupportEXAMPLE 3 - STABLE  
32"H Panel with Panel Mounted O-Legs

## Mid-Height Shelf Units

## MID-HEIGHT SHELF UNITS

| H    | W  | D  | Model Number | List | Grade C Paint |
|------|----|----|--------------|------|---------------|
| 7.75 | 24 | 12 | S-SHFHSAM24  | 315  | +12           |
| 7.75 | 30 | 12 | S-SHFHSAM30  | 327  | +12           |
| 7.75 | 36 | 12 | S-SHFHSAM36  | 337  | +12           |
| 7.75 | 42 | 12 | S-SHFHSAM42  | 357  | +12           |
| 7.75 | 48 | 12 | S-SHFHSAM48  | 395  | +12           |
| 7.75 | 60 | 12 | S-SHFHSAM60  | 415  | +12           |



## Specify


- Paint Selection

## Notes

- Mid-Height Shelf Units provide low profile overhead storage.
- Shelf ends have locking swing cams to prevent dislodgement.
- Shelf bottom will receive tasklights.
- Unit includes two mid-height shelf ends, one shelf pan, and mounting hardware.
- Order shelf unit that corresponds to panel width.

## LINEAR MID-HEIGHT SHELF UNITS

| H    | W  | D  | Model Number | List | Grade C Paint |
|------|----|----|--------------|------|---------------|
| 7.75 | 24 | 12 | S-SHFLSA24   | 315  | +12           |
| 7.75 | 30 | 12 | S-SHFLSA30   | 327  | +12           |
| 7.75 | 36 | 12 | S-SHFLSA36   | 337  | +12           |
| 7.75 | 42 | 12 | S-SHFLSA42   | 357  | +12           |
| 7.75 | 48 | 12 | S-SHFLSA48   | 395  | +12           |
| 7.75 | 60 | 12 | S-SHFLSA60   | 415  | +12           |



## Specify


- Paint Selection

## Notes

- Linear Mid-Height Shelf Units provide low profile overhead storage.
- Shelf ends have locking swing cams to prevent dislodgement.
- Shelf bottom will receive tasklights.
- Unit includes two Linear Mid-height shelf ends, one shelf pan, and mounting hardware.
- Order shelf unit that corresponds to panel width.

## SHELF DIVIDERS

| Model Number | List | Grade C Paint |
|--------------|------|---------------|
| S-SHFDIV12   | 139  | +10           |



## Specify

- Paint Selection


## Notes

- Shelf Divider mounts to mid-height shelf decks and may also be used inside of complete flipper bins.
- No hardware necessary.
- Divider snaps into place.
- Divider is 5 5/8" tall and designed to finish at the same height as a mid-height shelf end.

## Mid-Height Corner Shelf Units

## MID-HEIGHT CORNER SHELF UNITS

| H    | W  | Center D | Wing D | Model Number | List  | Grade C Paint |
|------|----|----------|--------|--------------|-------|---------------|
| 7.75 | 36 | 30.5     | 12     | S-SHFHCSAM36 | 1,539 | +25           |
| 7.75 | 42 | 30.5     | 12     | S-SHFHCSAM42 | 1,775 | +25           |
| 7.75 | 48 | 30.5     | 12     | S-SHFHCSAM48 | 2,048 | +25           |



## Specify


## • Paint Selection

## Notes

- Mid-Height Corner Shelf Units provide low profile overhead storage in corner above corner worksurfaces.
- Shelf ends have locking swing cams to prevent dislodgement.
- Shelf has lateral strength bar welded parallel to front edge which will receive a 36" or smaller tasklight parallel to front edge.
- All shelves 33 5/8" across front edge and are 30 1/2" deep front to back corner.
- Back corner has 3 1/2" x 3 1/2" cutout to facilitate cable management.
- 42" and 48" units have 6" and 12" wings respectively.
- Unit includes two mid-height shelf ends, one bottom shelf pan, two corner shelf back mounting brackets, and mounting hardware.
- Order shelf unit that corresponds to panel width.

## LINEAR MID-HEIGHT CORNER SHELF UNITS

| H    | W  | Center D | Wing D | Model Number | List  | Grade C Paint |
|------|----|----------|--------|--------------|-------|---------------|
| 7.75 | 36 | 30.5     | 12     | S-SHFLCSA36  | 1,333 | +25           |
| 7.75 | 42 | 30.5     | 12     | S-SHFLCSA42  | 1,419 | +25           |
| 7.75 | 48 | 30.5     | 12     | S-SHFLCSA48  | 1,995 | +25           |



## Specify


## • Paint Selection

## Notes

- Linear Mid-Height Corner Shelf Units provide low profile overhead storage in corner above corner worksurfaces.
- Shelf ends have locking swing cams to prevent dislodgement.
- Shelf has lateral strength bar welded parallel to front edge which will receive a 36" or smaller tasklight parallel to front edge.
- All shelves 33 5/8" across front edge and are 30 1/2" deep front to back corner.
- Back corner has 3 1/2" x 3 1/2" cutout to facilitate cable management.
- 42" and 48" units have 6" and 12" wings respectively.
- Unit includes two Linear Mid-height shelf ends, one bottom shelf pan, two corner shelf back mounting brackets, and mounting hardware.
- Order shelf unit that corresponds to panel width.

## SHELF DIVIDERS

| Model Number | List | Grade C Paint |
|--------------|------|---------------|
| S-SHFDIV12   | 139  | +10           |



## Specify

## • Paint Selection



## Notes

- Shelf Divider mounts to mid-height shelf decks and may also be used inside of complete flipper bins.
- No hardware necessary.
- Divider snaps into place.
- Divider is 5 5/8" tall and designed to finish at the same height as a mid-height shelf end.

## Type C Flipper Door Units

## METAL / FABRIC DOOR FRONT TYPE C FLIPPER DOOR UNITS



| Interior H | W  | Interior D | Model Number | List  | Grade C Paint | C.O.M Fabric | Grade C Fabric | Grade D Fabric | Easy Down |
|------------|----|------------|--------------|-------|---------------|--------------|----------------|----------------|-----------|
| 14.25      | 24 | 12         | S-FDUMSAB24  | 810   | +20           | -5           | +13            | +24            | +232      |
| 14.25      | 30 | 12         | S-FDUMSAB30  | 829   | +20           | -5           | +13            | +24            | +232      |
| 14.25      | 36 | 12         | S-FDUMSAB36  | 856   | +20           | -5           | +13            | +24            | +232      |
| 14.25      | 42 | 12         | S-FDUMSAB42  | 874   | +20           | -5           | +13            | +24            | +232      |
| 14.25      | 48 | 12         | S-FDUMSAB48  | 930   | +20           | -5           | +13            | +24            | +232      |
| 14.25      | 60 | 12         | S-FDUMSAB60  | 1,127 | +20           | -5           | +13            | +24            | +232      |



Easy Down Mechanism (Optional)

## LAMINATE DOOR FRONT TYPE C FLIPPER DOOR UNITS

| Interior H | W  | Interior D | Model Number | List  | Grade C Paint | Grade C Laminate | Easy Down |
|------------|----|------------|--------------|-------|---------------|------------------|-----------|
| 14.25      | 24 | 12         | S-FDUMSAB24L | 1,008 | +20           | +17              | +232      |
| 14.25      | 30 | 12         | S-FDUMSAB30L | 1,026 | +20           | +18              | +232      |
| 14.25      | 36 | 12         | S-FDUMSAB36L | 1,050 | +20           | +19              | +232      |
| 14.25      | 42 | 12         | S-FDUMSAB42L | 1,073 | +20           | +20              | +232      |
| 14.25      | 48 | 12         | S-FDUMSAB48L | 1,193 | +20           | +21              | +232      |
| 14.25      | 60 | 12         | S-FDUMSAB60L | 1,325 | +20           | +22              | +232      |



Easy Down Mechanism (Optional)

## Specify



## Notes

- Paint Selection
  - Paint or Fabric for Flipper Door Style (for metal/fabric units only)
  - Fabric Selection for Flipper Selection (for fabric units only)
  - Laminate Selection for Flipper Door (for laminate units only)
  - Edge Selection for Flipper Door (for laminate units only)
  - Easy Down Mechanism (optional)
- Type C Flipper Door Unit provides binder height, lockable overhead storage.
  - Door opens and stores above top cover pan.
  - Flipper unit has an open back.
  - Shelf ends have locking swing cams to prevent dislodgement.
  - Shelf bottom will receive tasklights.
  - Easy Down Mechanisms are optional for all sizes and recommended on 60" wide units.
  - All flipper doors are lockable with two supplied keys.
  - Lock cores are removable with removal keys and master keys are available.
  - Extra lock cores are available for keying flipper doors alike, but flipper doors may not be ordered without locks.
  - Keying flippers alike requires removal of pre-installed lock cores and installation of keyed alike cores in the field.
  - Order flipper unit that corresponds to panel width.
  - See "Accessories" for ordering replacement keys, master keys, core removal keys, additional keys cores for keying alike or replacement uses.

## Type C Raised Flipper Door Units

## METAL / FABRIC DOOR FRONT TYPE C RAISED FLIPPER DOOR UNITS



| Interior H | W  | Interior D | Model Number | List  | Grade C Paint | C.O.M Fabric | Grade C Fabric | Grade D Fabric | Perf Back | Easy Down |
|------------|----|------------|--------------|-------|---------------|--------------|----------------|----------------|-----------|-----------|
| 14.25      | 24 | 12         | S-FDURFMW24  | 1,654 | +20           | -5           | +13            | +24            | +35       | +232      |
| 14.25      | 30 | 12         | S-FDURFMW30  | 1,692 | +20           | -5           | +13            | +24            | +35       | +232      |
| 14.25      | 36 | 12         | S-FDURFMW36  | 1,732 | +20           | -5           | +13            | +24            | +35       | +232      |
| 14.25      | 42 | 12         | S-FDURFMW42  | 1,781 | +20           | -5           | +13            | +24            | +35       | +232      |
| 14.25      | 48 | 12         | S-FDURFMW48  | 1,876 | +20           | -5           | +13            | +24            | +35       | +232      |
| 14.25      | 60 | 12         | S-FDURFMW60  | 2,119 | +20           | -5           | +13            | +24            | +35       | +232      |



Easy Down Mechanism (Optional)

## LAMINATE DOOR FRONT TYPE C RAISED FLIPPER DOOR UNITS

| Interior H | W  | Interior D | Model Number | List  | Grade C Paint | Grade C Laminate | Perf Back | Easy Down |
|------------|----|------------|--------------|-------|---------------|------------------|-----------|-----------|
| 14.25      | 24 | 12         | S-FDURFMW24L | 1,852 | +20           | +17              | +35       | +232      |
| 14.25      | 30 | 12         | S-FDURFMW30L | 1,888 | +20           | +18              | +35       | +232      |
| 14.25      | 36 | 12         | S-FDURFMW36L | 1,925 | +20           | +19              | +35       | +232      |
| 14.25      | 42 | 12         | S-FDURFMW42L | 1,979 | +20           | +20              | +35       | +232      |
| 14.25      | 48 | 12         | S-FDURFMW48L | 2,143 | +20           | +21              | +35       | +232      |
| 14.25      | 60 | 12         | S-FDURFMW60L | 2,320 | +20           | +22              | +35       | +232      |



Easy Down Mechanism (Optional)

## Specify



## Notes

- Paint Selection
  - Paint or Fabric for Flipper Door Style (for metal/fabric units only)
  - Fabric Selection for Flipper Selection (for fabric units only)
  - Laminate Selection for Flipper Door (for laminate units only)
  - Edge Selection for Flipper Door (for laminate units only)
  - Metal or Perforated Back Panel Style
  - Easy Down Mechanism (optional)
- Type C Raised Flipper Door Unit provides binder height, lockable overhead storage.
  - When mounted on 50" high panels, unit rests level with a standard flipper door unit mounted at the top of a 66" high panel.
  - Door opens and stores above top cover pan.
  - Backside of unit is completely enclosed providing added security.
  - Shelf ends have locking swing cams to prevent dislodgement.
  - Shelf bottom will receive tasklights.
  - Easy Down Mechanisms are optional for all sizes and recommended on 60" wide units.
  - All flipper doors are lockable with two supplied keys.
  - Lock cores are removable with removal keys and master keys are available.
  - Extra lock cores are available for keying flipper doors alike, but flipper doors may not be ordered without locks.
  - Keying flippers alike requires removal of pre-installed lock cores and installation of keyed alike cores in the field.
  - Order flipper unit that corresponds to panel width.
  - See "Accessories" for ordering replacement keys, master keys, core removal keys, additional key cores for keying alike or replacement uses.

## Type D Flipper and Raised Flipper Door Units

## SOLID METAL DOOR FRONT TYPE D FLIPPER DOOR UNITS



| Interior H | W  | Interior D | Model Number | List  | Grade C Paint | Easy Down |
|------------|----|------------|--------------|-------|---------------|-----------|
| 14.25      | 24 | 12         | S-FDDSMW24   | 989   | +20           | +232      |
| 14.25      | 30 | 12         | S-FDDSMW30   | 1,011 | +20           | +232      |
| 14.25      | 36 | 12         | S-FDDSMW36   | 1,033 | +20           | +232      |
| 14.25      | 42 | 12         | S-FDDSMW42   | 1,056 | +20           | +232      |
| 14.25      | 48 | 12         | S-FDDSMW48   | 1,107 | +20           | +232      |



Easy Down Mechanism (Optional)

## SOLID METAL DOOR FRONT TYPE D RAISED FLIPPER DOOR UNITS

| Interior H | W  | Interior D | Model Number | List  | Grade C Paint | Perf Back | Easy Down |
|------------|----|------------|--------------|-------|---------------|-----------|-----------|
| 14.25      | 24 | 12         | S-FDDRMW24   | 1,832 | +20           | +35       | +232      |
| 14.25      | 30 | 12         | S-FDDRMW30   | 1,871 | +20           | +35       | +232      |
| 14.25      | 36 | 12         | S-FDDRMW36   | 1,913 | +20           | +35       | +232      |
| 14.25      | 42 | 12         | S-FDDRMW42   | 1,963 | +20           | +35       | +232      |
| 14.25      | 48 | 12         | S-FDDRMW48   | 2,057 | +20           | +35       | +232      |



Easy Down Mechanism (Optional)

## Specify


## Notes

- Paint Selection
- Metal or Perforated Back Panel Style (for raised flipper door units only)
- Easy Down Mechanism (optional)
- Type D Flipper Door Unit provides binder height, lockable overhead storage.
- When raised flipper door units are mounted on 50" high panels, unit rests level with a standard flipper door unit mounted at the top of a 66" high panel
- Door opens and stores above top cover pan.
- Flipper unit has an open back.
- Shelf ends have locking swing cams to prevent dislodgement.
- Shelf bottom will receive tasklights.
- Easy Down Mechanisms are optional for all sizes and recommended on 60" wide units.
- All flipper doors are lockable with two supplied keys.
- Lock cores are removable with removal keys and master keys are available.
- Extra lock cores are available for keying flipper doors alike, but flipper doors may not be ordered without locks.
- Keying flippers alike requires removal of pre-installed lock cores and installation of keyed alike cores in the field.
- Order flipper unit that corresponds to panel width.
- See "Accessories" for ordering replacement keys, master keys, core removal keys, additional key cores for keying alike or replacement uses.

## Sliding Door Units


## METAL DOOR FRONT SLIDING DOOR UNITS

| H     | W  | D  | Model Number | List  | Grade C Paint |
|-------|----|----|--------------|-------|---------------|
| 14.25 | 30 | 12 | S-MS2DOSA30  | 1,011 | +20           |
| 14.25 | 36 | 12 | S-MS2DOSA36  | 1,035 | +20           |
| 14.25 | 42 | 12 | S-MS2DOSA42  | 1,057 | +20           |
| 14.25 | 48 | 12 | S-MS2DOSA48  | 1,110 | +20           |
| 14.25 | 60 | 12 | S-MS2DOSA60  | 1,279 | +20           |



## LAMINATE DOOR FRONT SLIDING DOOR UNITS

| H     | W  | D  | Model Number | List  | Grade C Paint | Grade C Laminate |
|-------|----|----|--------------|-------|---------------|------------------|
| 14.25 | 30 | 12 | S-MS2DOSA30L | 1,210 | +20           | +18              |
| 14.25 | 36 | 12 | S-MS2DOSA36L | 1,228 | +20           | +19              |
| 14.25 | 42 | 12 | S-MS2DOSA42L | 1,254 | +20           | +20              |
| 14.25 | 48 | 12 | S-MS2DOSA48L | 1,375 | +20           | +21              |
| 14.25 | 60 | 12 | S-MS2DOSA60L | 1,471 | +20           | +22              |



## Specify

## Notes


- Paint Selection
- Laminate Selection for Sliding Door (for laminate units only)
- Edge Selection for Sliding Door (for laminate units only)

- Sliding Door Unit provides binder height, lockable overhead storage.
- Door slides open side to side.
- Sliding door unit has an open back.
- Shelf ends have locking swing cams to prevent dislodgement.
- Shelf bottom will receive tasklights.
- All sliding doors are lockable with (2) keys supplied.
- Lock cores are removable with removal keys and master keys are available.
- Extra lock cores are available for keying sliding doors alike, but sliding doors may not be ordered without locks.
- Keying sliding doors alike requires removal of pre-installed lock cores and installation of keyed alike cores in the field.
- See "Accessories" for shelf, flipper and key accessories.

## Raised Sliding Door Units


## METAL DOOR FRONT RAISED SLIDING DOOR UNITS

| H     | W  | D  | Model Number  | List  | Grade C Paint | Perforated Back |
|-------|----|----|---------------|-------|---------------|-----------------|
| 14.25 | 30 | 12 | S-RMS2DOSAS30 | 1,872 | +20           | +35             |
| 14.25 | 36 | 12 | S-RMS2DOSAS36 | 1,915 | +20           | +35             |
| 14.25 | 42 | 12 | S-RMS2DOSAS42 | 1,964 | +20           | +35             |
| 14.25 | 48 | 12 | S-RMS2DOSAS48 | 2,059 | +20           | +35             |
| 14.25 | 60 | 12 | S-RMS2DOSAS60 | 2,300 | +20           | +35             |



## LAMINATE DOOR FRONT RAISED SLIDING DOOR UNITS

| H     | W  | D  | Model Number   | List  | Grade C Paint | Grade C Laminate | Perforated Back |
|-------|----|----|----------------|-------|---------------|------------------|-----------------|
| 14.25 | 30 | 12 | S-RMS2DOSAL30L | 2,065 | +20           | +18              | +35             |
| 14.25 | 36 | 12 | S-RMS2DOSAL36L | 2,108 | +20           | +19              | +35             |
| 14.25 | 42 | 12 | S-RMS2DOSAL42L | 2,157 | +20           | +20              | +35             |
| 14.25 | 48 | 12 | S-RMS2DOSAL48L | 2,325 | +20           | +21              | +35             |
| 14.25 | 60 | 12 | S-RMS2DOSAL60L | 2,500 | +20           | +22              | +35             |



## Specify

- Paint Selection
- Laminate Selection for Sliding Door (for laminate units only)
- Edge Selection for Sliding Door (for laminate units only)


## Notes

- Type C Raised Sliding Door Unit provides binder height, lockable overhead storage.
- When mounted on 50" high panels, unit rests level with a standard flipper door unit mounted at the top of a 66" high panel.
- Door slides open side to side.
- Backside of unit is completely enclosed providing added security.
- Shelf ends have locking swing cams to prevent dislodgement.
- Shelf bottom will receive tasklights.
- All sliding doors are lockable with (2) keys supplied.
- Lock cores are removable with removal keys and master keys are available.
- Extra lock cores are available for keying sliding doors alike, but sliding doors may not be ordered without locks.
- Keying sliding doors alike requires removal of pre-installed lock cores and installation of keyed alike cores in the field.
- See "Accessories" for shelf, flipper and key accessories.

## Cabinet Door Units


## METAL DOOR FRONT CABINET DOOR UNITS

| H     | W  | D  | Model Number | List  | Grade C Paint |
|-------|----|----|--------------|-------|---------------|
| 14.25 | 24 | 12 | S-VDOSA24    | 1,343 | +20           |
| 14.25 | 30 | 12 | S-VDOSA30    | 1,363 | +20           |
| 14.25 | 36 | 12 | S-VDOSA36    | 1,387 | +20           |
| 14.25 | 42 | 12 | S-VDOSA42    | 1,409 | +20           |
| 14.25 | 48 | 12 | S-VDOSA48    | 1,465 | +20           |



## LAMINATE DOOR FRONT CABINET DOOR UNITS

| H     | W  | D  | Model Number | List  | Grade C Paint | Perforated Back |
|-------|----|----|--------------|-------|---------------|-----------------|
| 14.25 | 24 | 12 | S-VDOSA24L   | 1,539 | +20           | +17             |
| 14.25 | 30 | 12 | S-VDOSA30L   | 1,562 | +20           | +18             |
| 14.25 | 36 | 12 | S-VDOSA36L   | 1,582 | +20           | +19             |
| 14.25 | 42 | 12 | S-VDOSA42L   | 1,608 | +20           | +20             |
| 14.25 | 48 | 12 | S-VDOSA48L   | 1,726 | +20           | +21             |



## Specify

## Notes


- Paint Selection
- Laminate Selection for Cabinet Door (for laminate units only)
- Edge Selection for Cabinet Door (for laminate units only)

- Cabinet Door Unit provides binder height, lockable overhead storage.
- Doors swing open.
- Cabinet door unit has an open back.
- Shelf ends have locking swing cams to prevent dislodgement.
- Shelf bottom will receive tasklights.
- Units are lockable with (2) keys supplied.
- Lock cores are removable with removal keys and master keys are available.
- Extra lock cores are available for keying sliding doors alike, but sliding doors may not be ordered without locks.
- Keying sliding doors alike requires removal of pre-installed lock cores and installation of keyed alike cores in the field.
- See "Accessories" for shelf, flipper and key accessories.

## Raised Cabinet Door Units


## METAL DOOR FRONT RAISED CABINET DOOR UNITS

| H     | W  | D  | Model Number | List  | Grade C Paint | Perforated Back |
|-------|----|----|--------------|-------|---------------|-----------------|
| 14.25 | 24 | 12 | S-RVDOSA24   | 2,189 | +20           | +35             |
| 14.25 | 30 | 12 | S-RVDOSA30   | 2,224 | +20           | +35             |
| 14.25 | 36 | 12 | S-RVDOSA36   | 2,266 | +20           | +35             |
| 14.25 | 42 | 12 | S-RVDOSA42   | 2,318 | +20           | +35             |
| 14.25 | 48 | 12 | S-RVDOSA48   | 2,411 | +20           | +35             |



## LAMINATE DOOR FRONT RAISED CABINET DOOR UNITS

| H     | W  | D  | Model Number | List  | Grade C Paint | Grade C Laminate | Perforated Back |
|-------|----|----|--------------|-------|---------------|------------------|-----------------|
| 14.25 | 24 | 12 | S-RVDOSA24L  | 2,385 | +20           | +17              | +35             |
| 14.25 | 30 | 12 | S-RVDOSA30L  | 2,420 | +20           | +18              | +35             |
| 14.25 | 36 | 12 | S-RVDOSA36L  | 2,462 | +20           | +19              | +35             |
| 14.25 | 42 | 12 | S-RVDOSA42L  | 2,514 | +20           | +20              | +35             |
| 14.25 | 48 | 12 | S-RVDOSA48L  | 2,678 | +20           | +21              | +35             |



## Specify

## Notes


- Paint Selection
- Laminate Selection for Cabinet Door (for laminate units only)
- Edge Selection for Cabinet Door (for laminate units only)

- Raised Cabinet Door Unit provides binder height, lockable overhead storage.
- Doors swing open.
- Cabinet door unit has an open back.
- Shelf ends have locking swing cams to prevent dislodgement.
- Shelf bottom will receive tasklights.
- Units are lockable with (2) keys supplied.
- Lock cores are removable with removal keys and master keys are available.
- Extra lock cores are available for keying sliding doors alike, but sliding doors may not be ordered without locks.
- Keying sliding doors alike requires removal of pre-installed lock cores and installation of keyed alike cores in the field.
- See "Accessories" for shelf, flipper and key accessories.

## Tackboards, Tool Rail Kits and Panel Coat Hooks

## TACKBOARDS

| H  | W  | Model Number  | List | C.O.M<br>Fabric | Grade C<br>Fabric | Grade D<br>Fabric |
|----|----|---------------|------|-----------------|-------------------|-------------------|
| 12 | 24 | A-TACKSAB1224 | 265  | -5              | +13               | +24               |
| 12 | 30 | A-TACKSAB1230 | 279  | -5              | +13               | +24               |
| 12 | 36 | A-TACKSAB1236 | 292  | -5              | +13               | +24               |
| 12 | 42 | A-TACKSAB1242 | 307  | -5              | +13               | +24               |
| 12 | 48 | A-TACKSAB1248 | 329  | -5              | +13               | +24               |
| 12 | 60 | A-TACKSAB1260 | 426  | -5              | +13               | +24               |
| 15 | 24 | A-TACKSAB1524 | 269  | -5              | +13               | +24               |
| 15 | 30 | A-TACKSAB1530 | 287  | -5              | +13               | +24               |
| 15 | 36 | A-TACKSAB1536 | 296  | -5              | +13               | +24               |
| 15 | 42 | A-TACKSAB1542 | 316  | -5              | +13               | +24               |
| 15 | 48 | A-TACKSAB1548 | 333  | -5              | +13               | +24               |
| 15 | 60 | A-TACKSAB1560 | 436  | -5              | +13               | +24               |
| 19 | 24 | A-TACKSAB1924 | 343  | -5              | +13               | +24               |
| 19 | 30 | A-TACKSAB1930 | 366  | -5              | +13               | +24               |
| 19 | 36 | A-TACKSAB1936 | 383  | -5              | +13               | +24               |
| 19 | 42 | A-TACKSAB1942 | 404  | -5              | +13               | +24               |
| 19 | 48 | A-TACKSAB1948 | 426  | -5              | +13               | +24               |
| 19 | 60 | A-TACKSAB1960 | 456  | -5              | +13               | +24               |



## Specify


- Fabric Selection

## Notes

- Tackboards are 7/8" thick and mount to wall track to provide vertical tackable surface for wall track applications and private offices.
- Tackboards are available in three different heights.

## TOOL RAIL KITS

| H     | W  | Model Number | List | Grade C<br>Paint |
|-------|----|--------------|------|------------------|
| 3.375 | 24 | A-TBMW24     | 362  | +20              |
| 3.375 | 30 | A-TBMW30     | 397  | +20              |
| 3.375 | 36 | A-TBMW36     | 437  | +20              |
| 3.375 | 42 | A-TBMW42     | 466  | +20              |
| 3.375 | 48 | A-TBMW48     | 491  | +20              |
| 3.375 | 60 | A-TBMW60     | 724  | +20              |



## Specify


- Paint Selection

## Notes

- Tool Rail Kits mount to wall track or panel and accommodate paper flow elements.
- Tool rail kits are painted black as a standard. All other trim colors are Grade C upcharged.

## PANEL COAT HOOKS

| Model Number | List | Grade C Paint |
|--------------|------|---------------|
| A-CHM        | 70   | +5            |



## Specify


- Paint Selection

## Notes

- Panel Coat Hook mounts over top of panel and is available in all standard panel colors.

Whiteboards

| FRAMELESS WHITEBOARDS WITH MARKER TRAY |    |              |      |
|----------------------------------------|----|--------------|------|
| H                                      | W  | Model Number | List |
| 24                                     | 24 | A-FWBMW2424  | 421  |
| 24                                     | 30 | A-FWBMW2430  | 482  |
| 24                                     | 36 | A-FWBMW2436  | 545  |
| 24                                     | 42 | A-FWBMW2442  | 606  |
| 24                                     | 48 | A-FWBMW2448  | 629  |
| 24                                     | 60 | A-FWBMW2460  | 748  |
| 30                                     | 24 | A-FWBMW3024  | 452  |
| 30                                     | 30 | A-FWBMW3030  | 525  |
| 30                                     | 36 | A-FWBMW3036  | 598  |
| 30                                     | 42 | A-FWBMW3042  | 672  |
| 30                                     | 48 | A-FWBMW3048  | 748  |
| 30                                     | 60 | A-FWBMW3060  | 896  |



| Specify                                                                                                                 | Notes                                                                                                                                                                                                                                                                                                                                                       |
|-------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|
| <ul style="list-style-type: none"><li>• Paint Selection for Whiteboard</li><li>• Color Selection for Edgeband</li></ul> | <ul style="list-style-type: none"><li>• Frameless White Boards with Marker Tray is a .6" thick laminated white board with 1mm edgeband on all sides.</li><li>• Frameless White Boards mount to panels with standard brackets (included).</li><li>• Marker Tray is included and available in black only.</li><li>• Marker Tray is field installed.</li></ul> |



**National Showrooms:**

**Leominster**

AIS Headquarters  
25 Tucker Drive  
Leominster, MA 01453

---

**Chicago**

The Merchandise Mart  
Suite 1086  
Chicago, Illinois 60654

**New York**

AIS New York  
257 Park Avenue South  
New York, New York 10010

**Washington, D.C.**

AIS Washington, D.C.  
1501 M St, NW, STE 230  
Washington, D.C. 20005

**GSA Sales**

GSA Contract 47QSMA20D08Q4  
Multiple Award Schedule (MAS)  
Large Category: Furniture & Furnishings  
Subcategories: Office Furniture, Packaged  
Office Furniture and Furniture Services

**For additional information on AIS:**

Dealer Showrooms, Representative  
Directory, Project Case Studies, Online  
Catalog & Product Showcase  
Visit: **[www.ais-inc.com](http://www.ais-inc.com)**