

**OFFICE OF
STATE AID ROAD CONSTRUCTION**
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
P.O. BOX 1850
JACKSON, MISSISSIPPI 39215-1850

H. Carey Webb, P.E.
State Aid Engineer
Telephone (601)359-7150
www.msstateaidroads.us

412 Woodrow Wilson Avenue
Jackson, Mississippi 39216
Fax (601)359-7141
mail@osarc.state.ms.us


December 7, 2015

Board of Supervisors
Holmes County
c/o Chancery Clerk
Lexington, MS 39095

Gentlemen:

RE:

**FEDERAL AID BRIDGE REPLACEMENT
PROJECT NO. BR-0635(7)B
HOLMES COUNTY**

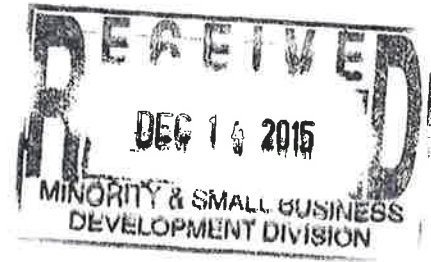

The Plans and specifications for the above numbered project have been reviewed and are herewith approved. You are, therefore, authorized to advertise this project for bids. The work to be done under this project consists of **Bridge Replacement**.

The date for opening these bids has been set for **Friday, January 15, 2016 at 10:00 a. m.** in the **Board Room** at **Lexington**.

In accordance with the Provisions of Section 31-7-13, Mississippi Code of 1972 as amended by House Bills numbered 901 and 1306 of the 1991 regular Legislative Session, the advertisement for receipt of bids on this project must be made once each week for two (2) consecutive weeks in a regular newspaper published in your county and, further, that the date as published for the bid opening shall not be less than fifteen (15) working days after the last published notice. The date, as set above, should be no sooner than the sixteenth working day after the last advertisement appears in the newspaper.

We are returning herewith an approved copy of the Plans and Proposal Documents to be filed by your Clerk when advertisement is begun.

Sincerely,

H. Carey Webb P. E.
State Aid Engineer

Polly Robinson


By: Polly Robinson
Administrative Assistant

pc: J. Wayne Morrison, P.E., Co. Eng./Project Eng.
Supervisor District(s) 4
Dan B. Tolar, P.E.
F.H.W.A. , 00-01 (if Federal)
System Consultants Associates
McGraw Hill Construction Dodge
MS Procurement Technical Assistance Program
Associated General Contractors of Mississippi, Inc.
M.R.B.A.
Project File

[Signature]
Date: _____
Per: _____
SCANNED

OFFICE OF STATE AID ROAD CONSTRUCTION
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
AND
HOLMES COUNTY BOARD OF SUPERVISORS

SECTION 900

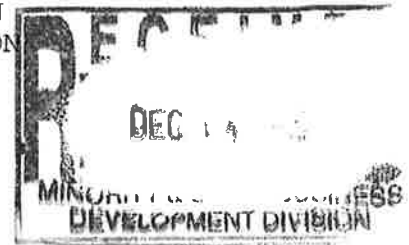

NOTICE TO CONTRACTORS:

Sealed bids will be received by the Board of Supervisors of Holmes County, Mississippi at the Holmes County Courthouse, Lexington, Mississippi, until 10:00 am on the 15th day of January, 2016 and shortly thereafter publicly opened for the construction of 0.792 miles of BRIDGE REPLACEMENT on the TOLARVILLE ROAD being known as Project No. BR-0635(7)B in Holmes County, Mississippi.

PRINCIPAL ITEMS OF WORK ARE APPROXIMATELY AS FOLLOWS:

ITEM	QUANTITY	UNIT
<u>ROADWAY ITEMS ITEMS:</u>		
MOBILIZATION	LUMP SUM	LS
CLEARING AND GRUBBING	LUMP SUM	LS
REMOVAL OF OBSTRUCTIONS	LUMP SUM	LS
REMOVAL OF BRIDGE AT STA 235+05.00	1.000	UN
REMOVAL OF BRIDGE AT STA 246+05.00	1.000	UN
REMOVAL OF BRIDGE AT STA 270+00.00	1.000	UN
BORROW EXCAVATION (CONTRACTOR FURNISHED, LVM, CLASS 9)	1,902.000	CY
GRANULAR MATERIAL (LVM), (CLASS 4, GROUP B)	684.000	CY
MIXING, SHAPING AND COMPACTION	294.000	SY
HOT MIX ASPHALT, ST 12.5 MM	414.000	TON
GUARD RAIL, W-BEAM, COMPLETE-IN-PLACE	412.500	LF
GUARD RAIL, BRIDGE END SECTION, TYPE "I" THRIE-BEAM, COMPLETE-IN-PLACE	12.000	EA
GUARD RAIL, TERMINAL END SECTION	12.000	EA
RIGHT-OF-WAY MARKERS (TYPE I)	12.000	EA
MAINTENANCE OF TRAFFIC	LUMP SUM	LS
ADDITIONAL CONSTRUCTION SIGNS	0.000	SF
4" WIDE THERMOPLASTIC EDGE STRIPE (CONTINUOUS WHITE) (60 MILS)	1.590	MI
4" WIDE THERMOPLASTIC TRAFFIC STRIPE (CONTINUOUS YELLOW) (90 MILS)	8,400.000	LF
REFLECTORIZED TRAFFIC OBJECT MARKER (ENCAPSULATED LENS) (TYPE 3)	12.000	EA
<u>EROSION CONTROL ITEMS:</u>		
AGRICULTURAL LIMESTONE	0.520	TON
COMMERCIAL FERTILIZER (13-13-13)	0.260	TON
SEEDING	0.260	AC

SECTION 900
PROJECT NO. BR-0635(7)B
HOLMES COUNTY

VEGETATIVE MATERIALS FOR MULCH	0.780	TON
TEMPORARY SILT FENCE	1,721.000	LF
(TYPE I) (AOS 0.15-0.84)		
WATTLES 12"	972.000	LF

BRIDGE ITEMS:

SITE "A" BRIDGE ITEMS:

TEST PILE	2.000	EA
CONVENTIONAL STATIC PILE LOAD TEST	0.000	EA
14" PRESTRESSED CONCRETE PILING	1,540.000	LF
BRIDGE CONCRETE, CLASS "B"	5.100	CY
REINFORCEMENT	611.000	LB
40' PRECAST CONCRETE SLAB UNIT, 3.5' INTERIOR	30.000	EA
40' PRECAST CONCRETE SLAB UNIT, 3.5' EXTERIOR	10.000	EA
PRECAST CONCRETE BARRIER RAIL	400.000	LF
31.17' PRECAST CONCRETE CAP, INTERMEDIATE UNIT, CONCRETE PILE,	4.000	EA
31.17' PRECAST CONCRETE CAP, END UNIT, CONCRETE PILE,	2.000	EA
9.17' PRECAST CONCRETE WING	4.000	EA
LOOSE RIPRAP, 300 LB.	340.000	TON
GEOTEXTILE UNDER RIP RAP, TYPE V, AOS 0.21-0.43	629.000	SY

SITE "B" BRIDGE ITEMS:

TEST PILE	2.000	EA
CONVENTIONAL STATIC PILE LOAD TEST	0.000	EA
14" PRESTRESSED CONCRETE PILING	1,680.000	LF
BRIDGE CONCRETE, CLASS "B"	5.060	CY
REINFORCEMENT	606.000	LB
40' PRECAST CONCRETE SLAB UNIT, 3.5' INTERIOR	30.000	EA
40' PRECAST CONCRETE SLAB UNIT, 3.5' EXTERIOR	10.000	EA
PRECAST CONCRETE BARRIER RAIL	400.000	LF
31.17' PRECAST CONCRETE CAP, INTERMEDIATE UNIT, CONCRETE PILE,	4.000	EA
31.17' PRECAST CONCRETE CAP, END UNIT, CONCRETE PILE,	2.000	EA
9.17' PRECAST CONCRETE WING	4.000	EA
LOOSE RIPRAP, 300 LB.	340.000	TON
GEOTEXTILE UNDER RIP RAP, TYPE V, AOS 0.21-0.43	629.000	SY

SECTION 900
PROJECT NO. BR-0635(7)B
HOLMES COUNTY

SITE "C" BRIDGE ITEMS:

TEST PILE	8.000	EA
CONVENTIONAL STATIC PILE LOAD TEST	0.000	EA
14" PRESTRESSED CONCRETE PILING	13,440.000	LF
BRIDGE CONCRETE, CLASS "B"	51.460	CY
REINFORCEMENT	6,151.000	LB
31' PRECAST CONCRETE SLAB UNIT, 3.5' INTERIOR	42.000	EA
40' PRECAST CONCRETE SLAB UNIT, 3.5' INTERIOR	228.000	EA
31' PRECAST CONCRETE SLAB UNIT, 3.5' EXTERIOR	14.000	EA
40' PRECAST CONCRETE SLAB UNIT, 3.5' EXTERIOR	76.000	EA
PRECAST CONCRETE BARRIER RAIL	3,474.000	LF
31' PRECAST CONCRETE CAP, INTERMEDIATE UNIT, CONCRETE PILE,	3.000	EA
31.17' PRECAST CONCRETE CAP, INTERMEDIATE UNIT, CONCRETE PILE,	33.000	EA
31.33' PRECAST CONCRETE CAP, INTERMEDIATE UNIT, CONCRETE PILE,	8.000	EA
31.17' PRECAST CONCRETE CAP, END UNIT, CONCRETE PILE,	2.000	EA
9.17' PRECAST CONCRETE WING	4.000	EA
LOOSE RIPRAP, 300 LB.	340.000	TON
GEOTEXTILE UNDER RIP RAP, TYPE V, AOS 0.21-0.43	629.000	SY

NOTICE TO CONTRACTORS:

CONTRACT TIME: 360 Working Days

BASIS OF AWARD

The award, if made, will be made to the lowest qualified bidder on the basis of published quantities.

The attention of the BIDDER is directed to the State and Federal laws governing selection of and employment of labor.

MINIMUM WAGE RATES for this project have been predetermined by the Secretary of the the Department of Labor in accordance with the requirements of Federal regulations governing the expenditure of FEDERAL AID HIGHWAY FUNDS and are set out in the labor regulations contained in the proposal.

The Board of Supervisors hereby notifies all bidders that it will affirmatively insure that in any contract entered into pursuant to this advertisement, minority business enterprise will be afforded full opportunity to submit bids in response to this invitation and will not be discriminated against on the grounds of race, color, or national origin in consideration for an award.

PLANS AND SPECIFICATIONS are on file in the Office of the Chancery Clerk of Holmes County, the County Engineer's office and the Office of the State Aid Engineer, 412 E. Woodrow Wilson Avenue, Jackson, Mississippi. This project shall be constructed in accordance with the latest edition of the Mississippi Standard Specifications for State Aid Road and Bridge Construction.

PLANS AND PROPOSALS may be secured from J. Wayne Morrison, County Engineer for Holmes County, Mississippi, P. O. Box 567, Yazoo City. The Cost is fifty dollars (\$50.00) for plans and fifty dollars (\$50.00) for the proposal, non-refundable

Certified check or bid bond for five percent (5%) of the total bid, made payable to Holmes County and the State of Mississippi must accompany each proposal.

Bidders are hereby notified that any proposal accompanied by letters qualifying in any manner the condition under which the proposal is tendered will be considered an irregular bid and such proposal will not be considered in making the award.

James Young, President
Holmes County Board of Supervisors