

**OFFICE OF  
STATE AID ROAD CONSTRUCTION**  
MISSISSIPPI DEPARTMENT OF TRANSPORTATION  
P.O. BOX 1850  
JACKSON, MISSISSIPPI 39215-1850

**H. Carey Webb, P.E.**  
State Aid Engineer  
Telephone (601)359-7150  
www.msstateaidroads.us


412 Woodrow Wilson Avenue  
Jackson, Mississippi 39216  
Fax (601)359-7141  
mail@osarc.state.ms.us

January 20, 2016

Board of Supervisors  
Washington County  
c/o Chancery Clerk  
Greenville, MS 38702-0309

Gentlemen:

RE: **HIGH PRIORITY**  
**PROJECT NO. MS031-076(3)B**  
**WASHINGTON COUNTY**

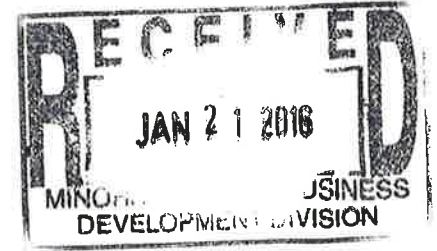

The Plans and specifications for the above numbered project have been reviewed and are herewith approved. You are, therefore, authorized to advertise this project for bids. The work to be done under this project consists of **Grade, Drain, Base & Bridge and HBSC Pavement**.

The date for opening these bids has been set for **Monday, February 22, 2016 at 10:00 a. m.** in the **Court House at Greenville**.

In accordance with the Provisions of Section 31-7-13, Mississippi Code of 1972 as amended by House Bills numbered 901 and 1306 of the 1991 regular Legislative Session, the advertisement for receipt of bids on this project must be made once each week for two (2) consecutive weeks in a regular newspaper published in your county and, further, that the date as published for the bid opening shall not be less than fifteen (15) working days after the last published notice. The date, as set above, should be no sooner than the sixteenth working day after the last advertisement appears in the newspaper.

We are returning herewith an approved copy of the Plans and Proposal Documents to be filed by your Clerk when advertisement is begun.

Sincerely,

H. Carey Webb P. E.  
State Aid Engineer

*Polly Robinson*


By: Polly Robinson  
Administrative Assistant

pc: Marcus E. Hooker, P.E., Co. Eng./Project Eng.  
Supervisor District(s) 3  
Lowery Germany, P.E.  
F.H.W.A. , 00-01 (if Federal)  
System Consultants Associates  
McGraw Hill Construction Dodge  
**MS Procurement Technical Assistance Program**  
Associated General Contractors of Mississippi, Inc.  
M.R.B.A.  
Project File

**SCANNED**  
Per: ag  
Date: 1/21/16

OFFICE OF STATE AID ROAD CONSTRUCTION  
MISSISSIPPI DEPARTMENT OF TRANSPORTATION  
AND  
WASHINGTON COUNTY BOARD OF SUPERVISORS

SECTION 900

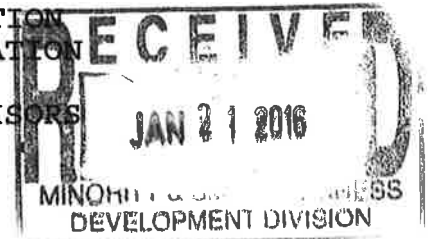

NOTICE TO CONTRACTORS:

Sealed bids will be received by the Board of Supervisors of Washington County, Mississippi at the Washington County Courthouse, Greenville, Mississippi, until on the \_\_\_\_\_ day of \_\_\_\_\_, and shortly thereafter publicly opened for the construction of 2.102 miles of GRADE, DRAIN, BASE & BRIDGE & HBSC PAVEMENT on the ABIDE ROAD being known as Project No. MS031-076(3)B in Washington County, Mississippi.

PRINCIPAL ITEMS OF WORK ARE APPROXIMATELY AS FOLLOWS:

ITEM	QUANTITY	UNIT
<u>ROADWAY ITEMS:</u>		
MOBILIZATION	LUMP SUM	LS
CLEARING AND GRUBBING	LUMP SUM	LS
REMOVAL OF BRIDGE @ STA. 26+78	1.000	UN
REMOVAL OF BRIDGE @ STA. 109+92	1.000	UN
UNCLASSIFIED EXCAVATION (FM)	17,537.000	CY
BORROW EXCAVATION (F.M.E.)	4,085.000	CY
(CONTRACTOR FURNISHED) (CLASS 7-6)		
CHANNEL EXCAVATION (FM)	2,452.000	CY
CRUSHED STONE	22,201.000	TON
HOT MIX ASPHALT, ST 9.5MM	2,532.000	TON
HOT MIX ASPHALT, ST 19MM	6,385.000	TON
CLASS B STRUCTURAL CONCRETE,	12.000	CY
MINOR STRUCTURES		
REINFORCING STEEL	811.000	LB
18" REINFORCED CONCRETE PIPE,	128.000	LF
CLASS III		
24" REINFORCED CONCRETE PIPE,	456.000	LF
CLASS III		
48" REINFORCED CONCRETE PIPE,	48.000	LF
CLASS III		
24" REINFORCED CONCRETE PIPE,	6.000	EA
END SECTION		
29" X 18" REINFORCED CONCRETE	127.000	LF
ARCH PIPE, CLASS III		
44" X 27" REINFORCED CONCRETE	1,306.000	LF
ARCH PIPE, CLASS III		
44" X 27" REINFORCED CONCRETE	9.000	EA
ARCH PIPE, END SECTION		
24" POLYMERIC COATED CORRUGATE	20.000	LF
PIPE, 14 GAGE, 2 1/2" CORRUGATION		
GRATINGS	2,085.000	LB
GUARD RAIL, "W" BEAM, COMPLETE	369.000	LF

SECTION 900  
PROJECT NO. MS031-076(3)B  
WASHINGTON COUNTY

---

IN PLACE

GUARD RAIL, CABLE ANCHOR, TYPE 1	25.000	LF
GUARD RAIL, BRIDGE END SECTION, TYPE "G", "W" BEAM, COMPLETE IN PLACE	4.000	EA
GUARD RAIL, BRIDGE END SECTION, TYPE "I", THRIE BEAM, COMPLETE IN PLACE	4.000	EA
GUARD RAIL, ROUNDED "W" END SECTION	4.000	EA
GUARD RAIL, TERMINAL END SECTION	4.000	EA
RIGHT-OF-WAY MARKERS (TYPE 3)	34.000	EA
MAINTENANCE OF TRAFFIC	LUMP SUM	LS
ADDITIONAL CONSTRUCTION SIGNS	0.000	SF
6" WIDE THERMOPLASTIC EDGE STRIP (CONTINUOUS WHITE) (60 MILS)	4.208	MI
6" WIDE THERMOPLASTIC TRAFFIC STRIPE (SKIP YELLOW) (90 MILS)	2.052	MI
6" WIDE THERMOPLASTIC TRAFFIC STRIPE (CONTINUOUS YELLOW) (90 MILS)	2,449.000	LF
THERMOPLASTIC LEGEND (WHITE) (120 MILS)	204.000	LF
THERMOPLASTIC LEGEND (WHITE) (120 MILS)	270.000	SF
REFLECTORIZED TRAFFIC WARNING SIGN (ENCAPSULATED LENS)	5.000	EA
REFLECTORIZED TRAFFIC REGULATORY SIGN (ENCAPSULATED LENS)	13.000	EA
REFLECTORIZED TRAFFIC OBJECT MARKER (ENCAPSULATED LENS) (TYPE 3)	8.000	EA
REFLECTORIZED RAILROAD CROSSING (CROSS BUCK) SIGN	2.000	EA
REFLECTORIZED ADVANCED WARNING SIGN (ENCAPSULATED LENS)	2.000	EA

EROSION CONTROL ITEMS:

AGRICULTURAL LIMESTONE	24.580	TON
COMMERCIAL FERTILIZER (13:13:13)	12.290	TON
AMMONIUM NITRATE	1.229	TON
SEEDING	12.290	AC
VEGETATIVE MATERIALS FOR MULCH	24.580	TON
TEMPORARY SILT FENCE (TYPE II) (AOS 0.15-0.84)	21,830.000	LF
WATTLES, 20"	2,250.000	LF

BRIDGE ITEMS:

SITE "A" ITEMS:

SECTION 900  
PROJECT NO. MS031-076(3)B  
WASHINGTON COUNTY

---

TEST PILE	2.000	EA
CONVENTIONAL STATIC PILE LOAD TEST	0.000	EA
18" PRESTRESSED CONCRETE PILING	880.000	LF
BRIDGE CONCRETE, CLASS "A"	49.400	CY
REINFORCEMENT	9,258.000	LB
31' PRECAST CONCRETE SLAB UNIT, 3.5' INTERIOR	8.000	EA
31' PRECAST CONCRETE SLAB UNIT, 4.5' INTERIOR	4.000	EA
40' PRECAST CONCRETE SLAB UNIT, 3.5' INTERIOR	4.000	EA
40' PRECAST CONCRETE SLAB UNIT, 4.5' INTERIOR	2.000	EA
31' PRECAST CONCRETE SLAB UNIT, 3.5' EXTERIOR	4.000	EA
40' PRECAST CONCRETE SLAB UNIT, 3.5' EXTERIOR	2.000	EA
PRECAST CONCRETE BARRIER RAIL	204.000	LF
LOOSE RIPRAP, 300 LB.	245.000	TON
GEOTEXTILE UNDER RIPRAP, TYPE V AOS 0.21-0.43	454.000	SY

SITE "B" ITEMS:

TEST PILE	2.000	EA
CONVENTIONAL STATIC PILE LOAD TEST	0.000	EA
18" PRESTRESSED CONCRETE PILING	900.000	LF
BRIDGE CONCRETE, CLASS "A"	58.840	CY
REINFORCEMENT	10,553.000	LB
19' PRECAST CONCRETE SLAB UNIT, 3.5' INTERIOR	4.000	EA
19' PRECAST CONCRETE SLAB UNIT, 4.5' INTERIOR	2.000	EA
31' PRECAST CONCRETE SLAB UNIT, 3.5' INTERIOR	12.000	EA
31' PRECAST CONCRETE SLAB UNIT, 4.5' INTERIOR	6.000	EA
19' PRECAST CONCRETE SLAB UNIT, 3.5' EXTERIOR	2.000	EA
31' PRECAST CONCRETE SLAB UNIT, 3.5' EXTERIOR	6.000	EA
PRECAST CONCRETE BARRIER RAIL	224.000	LF
LOOSE RIPRAP, 300 LB.	273.000	TON
GEOTEXTILE UNDER RIPRAP, TYPE V, AOS 0.21-0.43	528.000	SY

NOTICE TO CONTRACTORS:

CONTRACT TIME: 270 Working Days

BASIS OF AWARD

The award, if made, will be made to the lowest qualified bidder on the basis of published quantities.

The attention of the BIDDER is directed to the State and Federal laws governing selection of and employment of labor.

MINIMUM WAGE RATES for this project have been predetermined by the Secretary of the the Department of Labor in accordance with the requirements of Federal regulations governing the expenditure of FEDERAL AID HIGHWAY FUNDS and are set out in the labor regulations contained in the proposal.

The Board of Supervisors hereby notifies all bidders that it will affirmatively insure that in any contract entered into pursuant to this advertisement, minority business enterprise will be afforded full opportunity to submit bids in response to this invitation and will not be discriminated against on the grounds of race, color, or national origin in consideration for an award.

PLANS AND SPECIFICATIONS are on file in the Office of the Chancery Clerk of Washington County, the County Engineer's office and the Office of the State Aid Engineer, 412 E. Woodrow Wilson Avenue, Jackson, Mississippi. This project shall be constructed in accordance with the latest edition of the Mississippi Standard Specifications for State Aid Road and Bridge Construction.

PLANS AND PROPOSALS may be secured from Marcus E. Hooker, Sr., County Engineer for Washington County, Mississippi, P. O. Box 368, Greenville. The Cost is seventy five dollars (\$75.00) for plans and fifty dollars (\$50.00) for the proposal, non-refundable

Certified check or bid bond for five percent (5%) of the total bid, made payable to Washington County and the State of Mississippi must accompany each proposal.

Bidders are hereby notified that any proposal accompanied by letters qualifying in any manner the condition under which the proposal is tendered will be considered an irregular bid and such proposal will not be considered in making the award.

Paul Watson, Jr., President  
Washington County Board of Supervisors