


**OFFICE OF  
STATE AID ROAD CONSTRUCTION**  
MISSISSIPPI DEPARTMENT OF TRANSPORTATION  
P.O. BOX 1850  
JACKSON, MISSISSIPPI 39215-1850

**H. Carey Webb, P.E.**  
State Aid Engineer  
Telephone (601)359-7150  
www.msstateaidroads.us

412 Woodrow Wilson Avenue  
Jackson, Mississippi 39216  
Fax (601)359-7141  
mail@osarc.state.ms.us

August 25, 2014

Board of Supervisors  
Winston County  
c/o Chancery Clerk  
Louisville, MS 39339

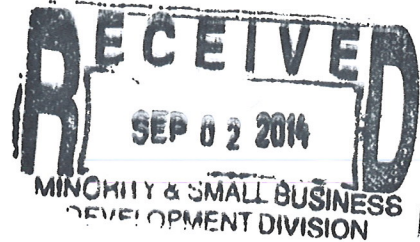

Gentlemen:

RE: **FEDERAL AID BRIDGE REPLACEMENT**  
**PROJECT NO. BR-0080(31)B**  
**WINSTON COUNTY**

The Plans and specifications for the above numbered project have been reviewed and are herewith approved. You are, therefore, authorized to advertise this project for bids. The work to be done under this project consists of **Bridge Replacement and Paved Approaches**.

The date for opening these bids has been set for **Monday, October 6, 2014 at 10:00 a. m.** in the **Courthouse at Louisville**.

In accordance with the Provisions of Section 31-7-13, Mississippi Code of 1972 as amended by House Bills numbered 901 and 1306 of the 1991 regular Legislative Session, the advertisement for receipt of bids on this project must be made once each week for two (2) consecutive weeks in a regular newspaper published in your county and, further, that the date as published for the bid opening shall not be less than fifteen (15) working days after the last published notice. The date, as set above, should be no sooner than the sixteenth working day after the last advertisement appears in the newspaper.

We are returning herewith an approved copy of the Plans and Proposal Documents to be filed by your Clerk when advertisement is begun.

Sincerely,

H. Carey Webb P. E.  
State Aid Engineer


*Polly Robinson*

By: Polly Robinson  
Administrative Assistant

pc: Jimmy Kemp, P.E., Co. Eng./Project Eng.  
Supervisor District(s) 3,4  
Jack Jackson, P.E.  
F.H.W.A. , **00-01 (if Federal)**  
System Consultants Associates  
McGraw Hill Construction Dodge  
**MS Procurement Technical Assistance Program**  
Associated General Contractors of Mississippi, Inc.  
M.R.B.A.  
Project File

**SCANNED**  
Per:                                 
Date:           9-2-14

OFFICE OF STATE AID ROAD CONSTRUCTION  
MISSISSIPPI DEPARTMENT OF TRANSPORTATION  
AND  
WINSTON COUNTY BOARD OF SUPERVISORS

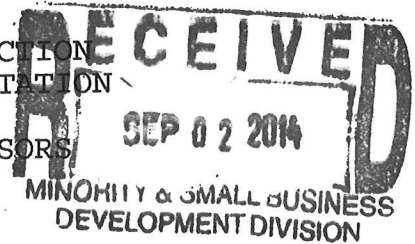

SECTION 900

NOTICE TO CONTRACTORS:

Sealed bids will be received by the Board of Supervisors of Winston County, Mississippi at the Winston County Courthouse, Louisville, Mississippi, until on the            day of           , and shortly thereafter publicly opened for the construction of 0.202 miles of BRIDGE REPLACEMENTS AND PAVED APPROACHES on the MILL CREEK ROAD (SITE "A") & SHILOH ROAD (SITE "B") being known as Project No. BR-0080(31)B in Winston County, Mississippi.

PRINCIPAL ITEMS OF WORK ARE APPROXIMATELY AS FOLLOWS:

ITEM	QUANTITY	UNIT
<u>ROADWAY ITEMS:</u>		
MOBILIZATION	LUMP SUM	LS
CLEARING AND GRUBBING	LUMP SUM	LS
REMOVAL OF 141"X91" SPPA PIPE & HEADWALLS (DOUBLE LINE)	1.000	UN
REMOVAL OF PRECAST BRIDGE @ STA. 128+65.00	1.000	UN
REMOVAL OF HMA AND/OR DBST SURFACING	181.000	SY
EXCESS EXCAVATION (LVM)	876.000	CY
GRANULAR MATERIAL (LVM), (CLASS 9, GROUP C)	1,880.000	CY
SIZE (I) STABILIZER AGGREGATE, COARSE	15.000	CY
HOT MIX ASPHALT, (ST) (12.5mm)	231.000	TON
HOT MIX ASPHALT, (ST) (19.0mm)	114.000	TON
GUARD RAIL, "W" BEAM	350.000	LF
GUARD RAIL, BRIDGE END SECTION, TYPE "I" THRIE BEAM	16.000	EA
GUARD RAIL, TERMINAL END SECTION	16.000	EA
RIGHT-OF-WAY MARKERS (TYPE II)	8.000	EA
MAINTENANCE OF TRAFFIC	LUMP SUM	LS
ADDITIONAL CONSTRUCTION SIGNS	0.000	SF
4" WIDE THERMOPLASTIC EDGE STRIPE (CONTINUOUS WHITE) (60 MILS)	0.404	MI
4" WIDE THERMOPLASTIC TRAFFIC STRIPE (CONTINUOUS YELLOW) (90 MILS)	2,136.000	LF
THERMOPLASTIC LEGEND (WHITE) (120 MILS)	78.000	LF
TWO-WAY YELLOW REFLECTIVE HIGH PERFORMANCE RAISED MARKERS	15.000	EA
REFLECTORIZED TRAFFIC WARNING SIGN	1.000	EA

SECTION 900  
PROJECT NO. BR-0080(31)B  
WINSTON COUNTY

---

(ENCAPSULATED LENS)		
REFLECTORIZED TRAFFIC REGULATORY SIGN (ENCAPSULATED LENS)	1.000	EA
REFLECTORIZED TRAFFIC OBJECT MARKER (ENCAPSULATED LENS)(TYPE 3)	8.000	EA

EROSION CONTROL ITEMS:

AGRICULTURAL LIMESTONE	2.600	TON
COMMERCIAL FERTILIZER (13-13-13)	0.650	TON
AMMONIUM NITRATE	0.195	TON
SEEDING	1.300	AC
VEGETATIVE MATERIALS FOR MULCH	2.600	TON
SOLID SODDING	600.000	SY
EXCELSIOR BLANKET	1,448.000	SY
TEMPORARY SILT FENCE (TYPE II) (AOS 0.15-0.84)	1,490.000	LF
TEMPORARY EROSION CHECKS	50.000	BL
LOOSE RIPRAP, 200 LB.	104.000	TON
GEOTEXTILE UNDER RIPRAP	208.000	SY
TYPE V, (AOS 0.21-0.43)		
WATTLES, 20"	300.000	LF

BRIDGE ITEMS:

SITE "A" BRIDGE ITEMS:

TEST PILE	2.000	EA
CONVENTIONAL STATIC PILE LOAD TEST	0.000	EA
12" STEEL PILING	450.000	LF
BRIDGE CONCRETE, CLASS "B"	3.108	CY
REINFORCEMENT	59.000	LB
19' PRECAST CONCRETE SLAB UNIT, 3.5' INTERIOR	18.000	EA
19' PRECAST CONCRETE SLAB UNIT, 3.5' EXTERIOR	6.000	EA
PRECAST CONCRETE BARRIER RAIL	114.000	LF
31' PRECAST CONCRETE CAP, INTERMEDIATE UNIT, STEEL PILE,	2.000	EA
31' PRECAST CONCRETE CAP, END UNIT, STEEL PILE,	2.000	EA
9.25' PRECAST CONCRETE WING	4.000	EA
LOOSE RIPRAP, 300 LB.	120.000	TON
GEOTEXTILE UNDER RIPRAP, TYPE V, (AOS 0.21-0.43)	255.000	SY

SITE "B" BRIDGE ITEMS:

TEST PILE	2.000	EA
-----------	-------	----

SECTION 900  
PROJECT NO. BR-0080(31)B  
WINSTON COUNTY

---

CONVENTIONAL STATIC PILE LOAD TEST	0.000	EA
12" STEEL PILING	520.000	LF
BRIDGE CONCRETE, CLASS "B"	4.296	CY
REINFORCEMENT	82.000	LB
19' PRECAST CONCRETE SLAB UNIT, 3.5' INTERIOR	12.000	EA
31' PRECAST CONCRETE SLAB UNIT, 3.5' INTERIOR	6.000	EA
19' PRECAST CONCRETE SLAB UNIT, 3.5' EXTERIOR	4.000	EA
31' PRECAST CONCRETE SLAB UNIT, 3.5' EXTERIOR	2.000	EA
PRECAST CONCRETE BARRIER RAIL	138.000	LF
31' PRECAST CONCRETE CAP, INTERMEDIATE UNIT, STEEL PILE,	2.000	EA
31' PRECAST CONCRETE CAP, END UNIT, STEEL PILE,	2.000	EA
9.25' PRECAST CONCRETE WING	4.000	EA
LOOSE RIPRAP, 300 LB.	182.000	TON
GEOTEXTILE UNDER RIPRAP, TYPE V, (AOS 0.21-0.43)	388.000	SY

NOTICE TO CONTRACTORS:

CONTRACT TIME: 90 Working Days

BASIS OF AWARD

The award, if made, will be made to the lowest qualified bidder on the basis of published quantities.

The attention of the BIDDER is directed to the State and Federal laws governing selection of and employment of labor.

MINIMUM WAGE RATES for this project have been predetermined by the Secretary of the the Department of Labor in accordance with the requirements of Federal regulations governing the expenditure of FEDERAL AID HIGHWAY FUNDS and are set out in the labor regulations contained in the proposal.

The Board of Supervisors hereby notifies all bidders that it will affirmatively insure that in any contract entered into pursuant to this advertisement, minority business enterprise will be afforded full opportunity to submit bids in response to this invitation and will not be discriminated against on the grounds of race, color, or national origin in consideration for an award.

PLANS AND SPECIFICATIONS are on file in the Office of the Chancery Clerk of Winston County, the County Engineer's office and the Office of the State Aid Engineer, 412 E. Woodrow Wilson Avenue, Jackson, Mississippi. This project shall be constructed in accordance with the latest edition of the Mississippi Standard Specifications for State Aid Road and Bridge Construction.

PLANS AND PROPOSALS may be secured from Jimmy Kemp, County Engineer for Winston County, Mississippi, P. O. Box 304, Noxapater. The Cost is fifty dollars (\$50.00) for plans and fifty dollars (\$50.00) for the proposal, non-refundable

Certified check or bid bond for five percent (5%) of the total bid, made payable to Winston County and the State of Mississippi must accompany each proposal.

Bidders are hereby notified that any proposal accompanied by letters qualifying in any manner the condition under which the proposal is tendered will be considered an irregular bid and such proposal will not be considered in making the award.

Because of the condition of the existing structures and roadway, bidders are hereby notified that the contractor awarded this contract shall be compelled to begin and complete work on Site "B" prior to doing so on Site "A".

Mike Peterson, President  
Winston County Board of Supervisors