



# OSARC

OFFICE OF  
STATE AID ROAD CONSTRUCTION

Harry Lee James, P.E.

State Aid Engineer


P.O. Box 1850

412 E. Woodrow Wilson Ave.

Jackson, Mississippi 39216

Fax (601) 379-7141

July 9, 2019

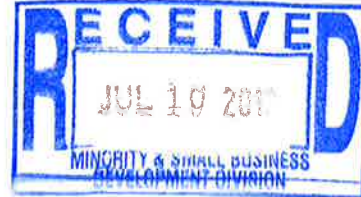

Board of Supervisors  
Jackson County  
c/o Chancery Clerk  
Pascagoula, MS 39568

Gentlemen:

RE: **LOCAL SYSTEM BRIDGE PROGRAM**  
**PROJECT NO. LSBP-30(16)**  
**JACKSON COUNTY**

The Plans and specifications for the above numbered project have been reviewed and are herewith approved. You are, therefore, authorized to advertise this project for bids. The work to be done under this project consists of **Bridge Replacement**.

The date for opening these bids has been set for **Monday, August 19, 2019 at 1:00 p.m.** in the **Boardroom** at **Pascagoula**.

In accordance with the Provisions of Section 31-7-13, Mississippi Code of 1972 as amended by House Bills numbered 901 and 1306 of the 1991 regular Legislative Session, the advertisement for receipt of bids on this project must be made once each week for two (2) consecutive weeks in a regular newspaper published in your county and, further, that the date as published for the bid opening shall not be less than fifteen (15) working days after the last published notice. The date, as set above, should be no sooner than the sixteenth working day after the last advertisement appears in the newspaper.

We are returning herewith an approved copy of the Plans and Proposal Documents to be filed by your Clerk when advertisement is begun.

Sincerely,

Harry Lee James, P. E.  
State Aid Engineer

*Evelyn Hollins*

By: Evelyn Hollins  
Administrative Assistant

pc: Robert Diamond, P.E., Co. Eng./Project Eng.  
Supervisor District(s) 1  
Jerry Gilliland, P.E.  
F.H.W.A., **00-01 (if Federal)**  
System Consultants Associates  
McGraw Hill Construction Dodge  
**MS Procurement Technical Assistance Program**  
Associated General Contractors of Mississippi, Inc.  
M.R.B.A.  
Project File

OFFICE OF STATE AID ROAD CONSTRUCTION  
MISSISSIPPI DEPARTMENT OF TRANSPORTATION  
AND  
JACKSON COUNTY BOARD OF SUPERVISORS

SECTION 900

NOTICE TO CONTRACTORS:

Sealed bids will be received by the Board of Supervisors of Jackson County, Mississippi at the Jackson County Courthouse, Pascagoula, Mississippi, until on the            day of            ,            and shortly thereafter publicly opened for the construction of 0.113 miles of BRIDGE REPLACEMENT on the BIG POINT ROAD being known as Project No. LSBP-30(16) in Jackson County, Mississippi.

PRINCIPAL ITEMS OF WORK ARE APPROXIMATELY AS FOLLOWS:

ITEM	QUANTITY	UNIT
<u>ROADWAY ITEMS:</u>		
MOBILIZATION	LUMP SUM	LS
CLEARING AND GRUBBING	LUMP SUM	LS
REMOVAL OF OBSTRUCTIONS	LUMP SUM	LS
REMOVAL OF BRIDGE @ STA. 15+60.52	1.000	UN
REMOVAL OF ASPHALT PAVING ALL DEPTHS	464.000	SY
UNCLASSIFIED EXCAVATION (FM)	118.000	CY
EXCESS EXCAVATION (FM)	67.000	CY
GEOGRID, TYPE III	494.000	SY
CRUSHED STONE SIZE 610, (LVM)	265.000	CY
GUARD RAIL, "W" BEAM	50.000	LF
GUARD RAIL, BRIDGE END SECTION, TYPE "I" THRIE BEAM	4.000	EA
GUARD RAIL, TERMINAL END SECTION	4.000	EA
RIGHT-OF-WAY MARKERS (TYPE II)	12.000	EA
MAINTENANCE OF TRAFFIC	LUMP SUM	LS
ADDITIONAL CONSTRUCTION SIGNS	0.000	SF
REFLECTORIZED TRAFFIC OBJECT MARKER (ENCAPSULATED LENS) (TYPE 3)	4.000	EA
<u>EROSION CONTROL ITEMS:</u>		
TOPSOIL FOR SLOPE TREATMENT (CONTRACTOR FURNISHED) (LVM)	208.000	CY
SOLID SODDING	1,870.000	SY
TEMPORARY SILT FENCE (TYPE II) (AOS 0.15-0.84)	200.000	LF
TURBIDITY BARRIER	180.000	LF
WATTLES, 20"	1,012.000	LF
5" OIL ABSORBENT BOOM	225.000	LF

BRIDGE ITEMS

SECTION 900  
PROJECT NO. LSBP-30(16)  
JACKSON COUNTY

---

TEST PILE	3.000	EA
CONVENTIONAL STATIC PILE LOAD TEST	0.000	EA
14" PRESTRESSED CONCRETE PILING	1,665.000	LF
18" PRE-FORMED PILE HOLES	1,190.000	LF
19' PRECAST CONCRETE SLAB UNIT, 3.5' INTERIOR, 30 DEG SKEW, RT. FWD	36.000	EA
31' PRECAST CONCRETE SLAB UNIT, 3.5' INTERIOR, 30 DEG SKEW, RT. FWD	18.000	EA
19' PRECAST CONCRETE SLAB UNIT, 3.5' EXTERIOR, 30 DEG SKEW, RT. FWD	12.000	EA
31' PRECAST CONCRETE SLAB UNIT, 3.5' EXTERIOR, 30 DEG SKEW, RT. FWD	6.000	EA
PRECAST CONCRETE BARRIER RAIL	414.000	LF
36.0' PRECAST CONCRETE CAP, INTERMEDIATE UNIT, CONCRETE PILE, 30 DEG SKEW, RT. FWD.	8.000	EA
36.0' PRECAST CONCRETE CAP, END UNIT, CONCRETE PILE, 30 DEG SKEW, RT. FWD.	2.000	EA
11.33' PRECAST CONCRETE WING	4.000	EA
LOOSE RIPRAP, 200 LB.	65.000	TON
GEOTEXTILE UNDER RIPRAP TYPE V, AOS 0.21-0.43	121.000	SY

NOTICE TO CONTRACTORS:

CONTRACT TIME: 75 Working Days

BASIS OF AWARD

The award, if made, will be made to the lowest qualified bidder on the basis of published quantities.

The Board of Supervisors hereby notifies all bidders that it will affirmatively insure that in any contract entered into pursuant to this advertisement, minority business enterprise will be afforded full opportunity to submit bids in response to this invitation and will not be discriminated against on the grounds of race, color, or national origin in consideration for an award.

PLANS AND SPECIFICATIONS are on file in the Office of the Chancery Clerk of Jackson County, the LSBP Engineer's office and the Office of the State Aid Engineer, 412 E. Woodrow Wilson Avenue, Jackson, Mississippi. This project shall be constructed in accordance with the latest edition of the Mississippi Standard Specifications for State Aid Road and Bridge Construction.

PLANS AND PROPOSALS may be secured from Robert Diamond, LSBP Engineer for Jackson County, Mississippi, P. O. Box 205, Lucedale. The Cost is dollars (\$50.00) for plans and dollars (\$50.00) for the proposal, non-refundable

Certified check or bid bond for five percent (5%) of the total bid, made payable to Jackson County and the State of Mississippi must accompany each proposal.

Bidders are hereby notified that any proposal accompanied by letters qualifying in any manner the condition under which the proposal is tendered will be considered an irregular bid and such proposal will not be considered in making the award.

Ken Taylor, President  
Jackson County Board of Supervisors