


OFFICE OF
STATE AID ROAD CONSTRUCTION
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
P.O. BOX 1850
JACKSON, MISSISSIPPI 39215-1850

H. Carey Webb, P.E.
State Aid Engineer
Telephone (601)359-7150
www.msstateaidroads.us

412 Woodrow Wilson Avenue
Jackson, Mississippi 39216
Fax (601)359-7141
mail@osarc.state.ms.us

July 25, 2016

Board of Supervisors
Washington County
c/o Chancery Clerk
Greenville, MS 38702-0309

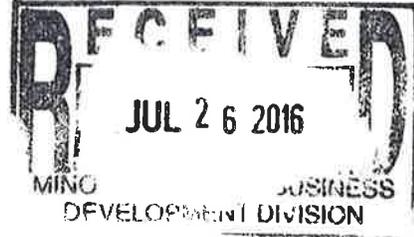

Gentlemen:

RE: **STATE EARMARK PROJECT**
PROJECT NO. SEMP-76(1)
WASHINGTON COUNTY

The Plans and specifications for the above numbered project have been reviewed and are herewith approved. You are, therefore, authorized to advertise this project for bids. The work to be done under this project consists of **Bridge Replacement and Approaches**

The date for opening these bids has been set for **Tuesday, August 30, 2016 at 10:00 a. m.** in the **Courthouse at Greenville.**

In accordance with the Provisions of Section 31-7-13, Mississippi Code of 1972 as amended by House Bills numbered 901 and 1306 of the 1991 regular Legislative Session, the advertisement for receipt of bids on this project must be made once each week for two (2) consecutive weeks in a regular newspaper published in your county and, further, that the date as published for the bid opening shall not be less than fifteen (15) working days after the last published notice. The date, as set above, should be no sooner than the sixteenth working day after the last advertisement appears in the newspaper.

We are returning herewith an approved copy of the Plans and Proposal Documents to be filed by your Clerk when advertisement is begun.

Sincerely,

H. Carey Webb P. E.
State Aid Engineer

Polly Robinson


By: Polly Robinson
Administrative Assistant

pc: Marcus E. Hooker, P.E., Co. Eng./Project Eng.
Supervisor District(s) 3
Lowery Germany, P.E.
F.H.W.A. , **00-01 (if Federal)**
System Consultants Associates
McGraw Hill Construction Dodge
MS Procurement Technical Assistance Program
Associated General Contractors of Mississippi, Inc.
M.R.B.A.
Project File

SCANNED

Per: _____
Date: 7/26/16

OFFICE OF STATE AID ROAD CONSTRUCTION
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
AND
WASHINGTON COUNTY BOARD OF SUPERVISORS

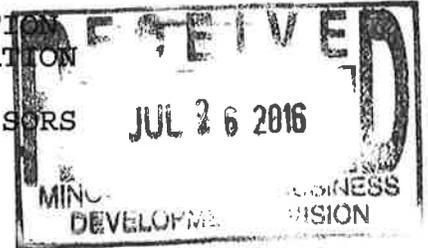

SECTION 900

NOTICE TO CONTRACTORS:

Sealed bids will be received by the Board of Supervisors of Washington County, Mississippi at the Washington County Courthouse, Greenville, Mississippi, until on the _____ day of _____, and shortly thereafter publicly opened for the construction of 0.394 miles of BRIDGE REPLACEMENT & APPROACHES on the NORTH BROADWAY EXTENDED being known as Project No. SEMP-76(1) in Washington County, Mississippi.

PRINCIPAL ITEMS OF WORK ARE APPROXIMATELY AS FOLLOWS:

<u>ITEM</u>	<u>QUANTITY</u>	<u>UNIT</u>
<u>ROADWAY ITEMS:</u>		
MOBILIZATION	LUMP SUM	LS
CLEARING AND GRUBBING	LUMP SUM	LS
REMOVAL OF BRIDGE SITE "A" STA. 65+90	1.000	UN
REMOVAL OF BRIDGE SITE "B" STA. 105+38	1.000	UN
REMOVAL OF BYPASS CONSTRUCTION	2.000	UN
REMOVAL OF 144" BITUMINOUS COATED CORRUGATED METAL PIPE, 14 GAGE, 3"X1" CORRUGATION	320.000	LF
REMOVAL OF CONCRETE CURB	73.000	LF
REMOVAL OF BRIDGE END PAVEMENT	248.000	SY
REMOVAL OF CRUSHED STONE	7,084.000	SY
UNCLASSIFIED EXCAVATION (FM)	2,480.000	CY
BORROW EXCAVATION (F.M.E.) (CONTRACTOR FURNISHED) (CLASS 9)	11,423.000	CY
CHANNEL EXCAVATION (FM)	634.000	CY
CRUSHED STONE	3,621.000	TON
HOT MIX ASPHALT, ST. 12.5 MM	1,464.000	TON
HOT MIX ASPHALT, ST. 19 MM	777.000	TON
COLD MILLING OF BITUMINOUS PAVEMENT, ALL DEPTHS	5,574.000	SY
144" BITUMINOUS COATED CORRUGATED METAL PIPE, 14 GAGE, 3"X1" CORRUGATION	320.000	LF
GUARD RAIL, "W" BEAM, COMPLETE IN PLACE	618.750	LF
GUARD RAIL, CABLE ANCHOR, TYPE 1	2.000	LF
GUARD RAIL, BRIDGE END SECTION, TYPE "G"	8.000	EA
GUARD RAIL, TERMINAL END SECTION	8.000	EA
RIGHT-OF-WAY MARKERS (TYPE II)	13.000	EA
MAINTENANCE OF TRAFFIC	LUMP SUM	LS

SECTION 900
 PROJECT NO. SEMP-76 (1)
 WASHINGTON COUNTY

ADDITIONAL CONSTRUCTION SIGNS	0.000	SF
6" WIDE TRAFFIC STRIPE (CONTINUOUS WHITE)	4,250.000	LF
6" WIDE TRAFFIC STRIPE (CONTINUOUS YELLOW)	4,250.000	LF
6" WIDE THERMOPLASTIC EDGE STRIP (CONTINUOUS WHITE) (60 MILS)	0.856	MI
6" WIDE THERMOPLASTIC TRAFFIC STRIPE (SKIP YELLOW) (90 MILS)	0.394	MI
6" WIDE THERMOPLASTIC TRAFFIC STRIPE (CONTINUOUS YELLOW) (90 MILS)	434.000	LF
THERMOPLASTIC LEGEND (WHITE) (120 MILS)	49.000	LF
REFLECTORIZED TRAFFIC OBJECT MARKER (ENCAPSULATED LENS) (TYPE 3)	8.000	EA

EROSION CONTROL ITEMS:

AGRICULTURAL LIMESTONE	15.980	TON
COMMERCIAL FERTILIZER (13:13:13)	7.990	TON
SEEDING	7.990	AC
VEGETATIVE MATERIALS FOR MULCH	23.970	TON
TEMPORARY SILT FENCE (TYPE II) (AOS 0.15-0.84)	2,659.000	LF
WATTLES, 20"	600.000	LF

BRIDGE ITEMS:

SITE A ITEMS:

TEST PILE	2.000	EA
CONVENTIONAL STATIC PILE LOAD TEST	0.000	EA
14" PRESTRESSED CONCRETE PILING	720.000	LF
31' PRECAST CONCRETE SLAB UNIT, 3.5' INTERIOR, 30 DEG SKEW, LT. FWD	8.000	EA
31' PRECAST CONCRETE SLAB UNIT, 4.5' INTERIOR, 30 DEG SKEW, LT. FWD	4.000	EA
40' PRECAST CONCRETE SLAB UNIT, 3.5' INTERIOR, 30 DEG SKEW, LT. FWD	4.000	EA
40' PRECAST CONCRETE SLAB UNIT, 4.5' INTERIOR, 30 DEG SKEW, LT. FWD	2.000	EA
31' PRECAST CONCRETE SLAB UNIT, 3.5' EXTERIOR, 30 DEG SKEW, LT. FWD	4.000	EA
40' PRECAST CONCRETE SLAB UNIT,	2.000	EA

SECTION 900
 PROJECT NO. SEMP-76(1)
 WASHINGTON COUNTY

3.5' EXTERIOR, 30 DEG SKEW, LT. FWD		
PRECAST CONCRETE BARRIER RAIL	204.000	LF
38.17' PRECAST CONCRETE CAP, INTERMEDIATE UNIT, CONCRETE PILE, 30 DEG SKEW, LT. FWD.	2.000	EA
38' PRECAST CONCRETE CAP, END UNIT, CONCRETE PILE, 30 DEG SKEW, LT. FWD.	2.000	EA
11.33' PRECAST CONCRETE WING	4.000	EA
LOOSE RIPRAP, 300 LB.	259.000	TON
GEOTEXTILE UNDER RIPRAP, TYPE 5, AOS-0.21-0.43	508.000	SY

SITE B ITEMS:

TEST PILE	2.000	EA
CONVENTIONAL STATIC PILE LOAD TEST	0.000	EA
14" PRESTRESSED CONCRETE PILING	720.000	LF
31' PRECAST CONCRETE SLAB UNIT, 3.5' INTERIOR, 30 DEG SKEW, LT. FWD	8.000	EA
31' PRECAST CONCRETE SLAB UNIT, 4.5' INTERIOR, 30 DEG SKEW, LT. FWD	4.000	EA
40' PRECAST CONCRETE SLAB UNIT, 3.5, INTERIOR, 30 DEG SKEW, LT. FWD	4.000	EA
40' PRECAST CONCRETE SLAB UNIT, 4.5' INTERIOR, 30 DEG SKEW, LT. FWD	2.000	EA
31' PRECAST CONCRETE SLAB UNIT, 3.5' EXTERIOR, 30 DEG SKEW, LT. FWD	4.000	EA
40' PRECAST CONCRETE SLAB UNIT, 3.5' EXTERIOR, 30 DEG SKEW, LT. FWD	2.000	EA
PRECAST CONCRETE BARRIER RAIL	204.000	LF
38.17' PRECAST CONCRETE CAP, INTERMEDIATE UNIT, CONCRETE PILE, 30 DEG SKEW, LT. FWD.	2.000	EA
38' PRECAST CONCRETE CAP, END UNIT, CONCRETE PILE, 30 DEG SKEW, LT. FWD.	2.000	EA
11.33' PRECAST CONCRETE WING	4.000	EA
LOOSE RIPRAP, 300 LB.	229.000	TON
GEOTEXTILE UNDER RIPRAP, TYPE 5, AOS -0.21-0.43	453.000	SY

NOTICE TO CONTRACTORS:

CONTRACT TIME: 270 Working Days

BASIS OF AWARD

The award, if made, will be made to the lowest qualified bidder on the basis of published quantities.

The Board of Supervisors hereby notifies all bidders that it will affirmatively insure that in any contract entered into pursuant to this advertisement, minority business enterprise will be afforded full opportunity to submit bids in response to this invitation and will not be discriminated against on the grounds of race, color, or national origin in consideration for an award.

PLANS AND SPECIFICATIONS are on file in the Office of the Chancery Clerk of Washington County, the County Engineer's office and the Office of the State Aid Engineer, 412 E. Woodrow Wilson Avenue, Jackson, Mississippi. This project shall be constructed in accordance with the latest edition of the Mississippi Standard Specifications for State Aid Road and Bridge Construction.

PLANS AND PROPOSALS may be secured from Marcus E. Hooker, Sr., County Engineer for Washington County, Mississippi, P. O. Box 368, Greenville. The Cost is seventy five dollars (\$75.00) for plans and fifty dollars (\$50.00) for the proposal, non-refundable

Certified check or bid bond for five percent (5%) of the total bid, made payable to Washington County and the State of Mississippi must accompany each proposal.

Bidders are hereby notified that any proposal accompanied by letters qualifying in any manner the condition under which the proposal is tendered will be considered an irregular bid and such proposal will not be considered in making the award.

Carl McGee, President
Washington County Board of Supervisors

SPECIAL NOTICE TO BIDDERS

CONSTRUCTION SAFETY AND HEALTH STANDARDS

It is a condition of this contract, and shall be made a condition of each subcontract entered into pursuant to this contract, that the contractor and any subcontractor shall not require any laborer or mechanic employed in performance of the contract to work in surroundings or under working conditions which are unsanitary, hazardous, or dangerous to his health or safety, as determined under the following Federal regulations:

1. (a) Occupational Safety and Health Standards, Department of Labor, Occupational Safety and Health Administration, Federal Register of October 18, 1972, pages 22102 to 22356.

(b) General Industry Guide for Applying Safety and Health Standards, OSHA Publication No. 2072, U.S. Department of Labor, Occupational Safety and Health Administration.
2. Safety and Health Regulations for Construction, Department of Labor, Occupational Safety and Health Administration, Federal Register of December 16, 1972, pages 27503 to 27600.
3. Safety and Health Standards for Maritime Employment, Department of Labor, Occupational Safety and Health Administration, Federal Register of October 19, 1972, pages 22458 to 22564.