

OFFICE OF
STATE AID ROAD CONSTRUCTION
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
P.O. BOX 1850
JACKSON, MISSISSIPPI 39215-1850

H. Carey Webb, P.E.
State Aid Engineer
Telephone (601)359-7150
www.msstateaidroads.us


412 Woodrow Wilson Avenue
Jackson, Mississippi 39216
Fax (601)359-7141
mail@osarc.state.ms.us

February 4, 2016

Board of Supervisors
Montgomery County
c/o Chancery Clerk
Winona, MS 38967

Gentlemen:

RE: **LOCAL SYSTEM BRIDGE PROGRAM**
PROJECT NO. LSBP-49(14)
MONTGOMERY COUNTY

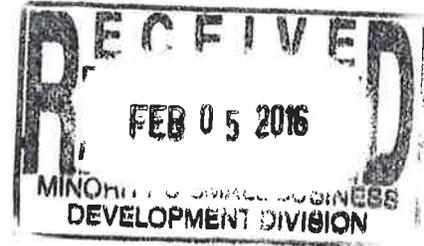

The Plans and specifications for the above numbered project have been reviewed and are herewith approved. You are, therefore, authorized to advertise this project for bids. The work to be done under this project consists of **Bridge Replacement and Approaches**.

The date for opening these bids has been set for **Monday, April 4, 2016 at 8:00 a. m.** in the **Boardroom at Winona**.

In accordance with the Provisions of Section 31-7-13, Mississippi Code of 1972 as amended by House Bills numbered 901 and 1306 of the 1991 regular Legislative Session, the advertisement for receipt of bids on this project must be made once each week for two (2) consecutive weeks in a regular newspaper published in your county and, further, that the date as published for the bid opening shall not be less than fifteen (15) working days after the last published notice. The date, as set above, should be no sooner than the sixteenth working day after the last advertisement appears in the newspaper.

We are returning herewith an approved copy of the Plans and Proposal Documents to be filed by your Clerk when advertisement is begun.

Sincerely,

H: Carey Webb P. E.
State Aid Engineer


Polly Robinson

SCANNED
Per: CJ
Date: 2/5/16

By: Polly Robinson
Administrative Assistant

pc: J. Christian Gardner, P.E., Co. Eng./Project Eng.
Supervisor District(s) 1
Jerry Gilliland, P.E.
F.H.W.A. , 00-01 (if Federal)
System Consultants Associates
McGraw Hill Construction Dodge
MS Procurement Technical Assistance Program
Associated General Contractors of Mississippi, Inc.
M.R.B.A.
Project File

OFFICE OF STATE AID ROAD CONSTRUCTION
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
AND
MONTGOMERY COUNTY BOARD OF SUPERVISORS

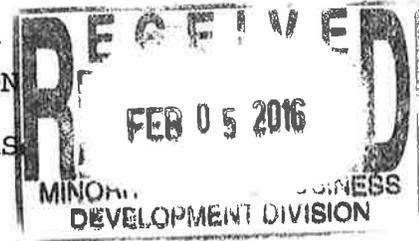

SECTION 900

NOTICE TO CONTRACTORS:

Sealed bids will be received by the Board of Supervisors of Montgomery County, Mississippi at the Montgomery County Courthouse, Winona, Mississippi, until on the _____ day of _____, and shortly thereafter publicly opened for the construction of 0.158 miles of REPLACE BRIDGE AND APPROACHES on the WILSON ROAD being known as Project No. LSBP-49(14) in Montgomery County, Mississippi.

PRINCIPAL ITEMS OF WORK ARE APPROXIMATELY AS FOLLOWS:

<u>ITEM</u>	<u>QUANTITY</u>	<u>UNIT</u>
<u>ROADWAY ITEMS:</u>		
MOBILIZATION	LUMP SUM	LS
CLEARING AND GRUBBING	LUMP SUM	LS
REMOVAL OF BRIDGE AT STA. 34+30	1.000	UN
UNCLASSIFIED EXCAVATION (FM)	888.000	CY
BORROW EXCAVATION (F.M.E.) (CONTRACTOR FURNISHED) (CLASS 9)	3,458.000	CY
GRANULAR MATERIAL, (CLASS 3, GROUP "B")	837.000	TON
CLASS "B" STRUCTURAL CONCRETE, MINOR STRUCTURES	1.260	CY
24" CORRUGATED ALUMINUM PIPE, 12 GAGE, 2 2/3" X 1/2" CORRUGATION	120.000	LF
24" CORRUGATED ALUMINUM END SECTION, 12 GAGE	6.000	EA
RIGHT-OF-WAY MARKERS (TYPE I)	8.000	EA
MAINTENANCE OF TRAFFIC	LUMP SUM	LS
ADDITIONAL CONSTRUCTION SIGNS	0.000	SF
REFLECTORIZED TRAFFIC OBJECT MARKER (ENCAPSULATED LENS) (TYPE 3)	4.000	EA
<u>EROSION CONTROL ITEMS:</u>		
AGRICULTURAL LIMESTONE	7.920	TON
COMMERCIAL FERTILIZER (13:13:13)	1.190	TON
AMMONIUM NITRATE	0.400	TON
SEEDING	3.960	AC
VEGETATIVE MATERIALS FOR MULCH	11.880	TON
EXCELSIOR BLANKET	300.000	SY
TEMPORARY SILT FENCE (TYPE II) (AOS 0.15 - 0.84)	2,648.000	LF
LOOSE RIPRAP, 200 LB.	100.000	TON
GEOTEXTILE UNDER RIPRAP, TYPE V, AOS 0.21 - 0.43	210.000	SY

SECTION 900
 PROJECT NO. LSBP-49(14)
 MONTGOMERY COUNTY

WATTLES, 20"	300.000	LF
<u>BRIDGE STA. 33+47.00, 1 @ 40', 1 @ 60', 1 @ 80', 1 @ 60', 1 @ 31' ITEMS:</u>		
TEST PILE	2.000	EA
CONVENTIONAL STATIC PILE LOAD TEST	0.000	EA
14" STEEL PILING	2,760.000	LF
BRIDGE CONCRETE, CLASS "A"	293.940	CY
31' PRESTRESSED CONCRETE BEAM TYPE I+2	123.000	LF
40' PRESTRESSED CONCRETE BEAM TYPE I+2	159.000	LF
60' PRESTRESSED CONCRETE BEAM TYPE III	478.000	LF
80' PRESTRESSED CONCRETE BEAM TYPE III	319.000	LF
REINFORCEMENT	59,188.000	LB
CONCRETE RAILING	542.000	LF
LOOSE RIPRAP, 300 LB.	637.000	TON
GEOTEXTILE UNDER RIPRAP, TYPE V, AOS 0.21 - 0.43	1,340.000	SY

NOTICE TO CONTRACTORS:

CONTRACT TIME: 90 Working Days

BASIS OF AWARD

The award, if made, will be made to the lowest qualified bidder on the basis of published quantities.

The Board of Supervisors hereby notifies all bidders that it will affirmatively insure that in any contract entered into pursuant to this advertisement, minority business enterprise will be afforded full opportunity to submit bids in response to this invitation and will not be discriminated against on the grounds of race, color, or national origin in consideration for an award.

PLANS AND SPECIFICATIONS are on file in the Office of the Chancery Clerk of Montgomery County, the LSBP Engineer's office and the Office of the State Aid Engineer, 412 E. Woodrow Wilson Avenue, Jackson, Mississippi. This project shall be constructed in accordance with the latest edition of the Mississippi Standard Specifications for State Aid Road and Bridge Construction.

PLANS AND PROPOSALS may be secured from J. Christian Gardner, LSBP Engineer for Montgomery County, Mississippi, P. O. Drawer A, Indianola. The Cost is fifty dollars (\$50.00) for plans and fifty dollars (\$50.00) for the proposal, non-refundable

Certified check or bid bond for five percent (5%) of the total bid, made payable to Montgomery County and the State of Mississippi must accompany each proposal.

Bidders are hereby notified that any proposal accompanied by letters qualifying in any manner the condition under which the proposal is tendered will be considered an irregular bid and such proposal will not be considered in making the award.

Ron Wood, President
Montgomery County Board of Supervisors