
ACCESSORIES

Product Specifications	554
Product Options	557
Product Pages	558

ACCESSORIES

POWER/DATA ELECTRICAL SPECIFICATIONS

ROUND GROMMET (G10)

- NACG10EL features 2 120 volt receptacles and 2 Cat5E data ports and 6' AC cord rated at 15 amps; data ports are not pre-wired
- Field installable
- For conference tables only
- Black nylon
- 8 adapter plates are provided

PIVOTING POWER GROMMET (MHO-B) (G12A, G12B, AND G12C)

- Field installable
- Silver, black, or white powder coat
- (G12A) 2 power outlets, 1 blank port and 1 dual USB-A port
- (G12B) 2 power outlets and 2 USB-A + C combo
- (G12C) 4 power outlets with 72" circuit breaker cord
- Must be ordered separately and installed in the field – top should be ordered with CUT-G12C option
- Hardwire available
- Specify model number only
- 6 ft. cord
- UL Listed

INTERLINK IQ PIVOTING POWER GROMMET (MHO-B) (G12A, G12B, AND G12C)

- Non-sequential "Daisy chain" solution
- Interlink IQ system can be used with training tables
- Interlink IQ system must begin with a smart box with starter plug (or full set)
- Jumper or transitional jumper used between the smart box and G12 IQ grommets when the span between grommet locations are greater than 60"
- Interlink IQ is plugged only. Hardwire is not available
- Built-in status indicator: green means go, red light indicates too many units
- UL recognized

DOUBLE PIVOTING M2X-B POWER GROMMET (G15A, G15B)

- Accommodates table thicknesses of ¾"-1¼"
- 1 touch door remains open during use
- 2 6 ft. power cords with 3-prong molded plug for each side
- Spill-proof
- Available in silver, black or white powder coat
- Hardwire/Chicago Code available
- Corded units (standard and hardwire) have 2 72" long power cords (1 for each side) rated at 15 amps 120 volts
- Grommet comes with undersurface wire managers attached underneath conference top
- Field installable into a CUT-G15 (must be ordered)
- UL Listed
- G15A SIDE 1: 2 power outlets, 1 dual USB-A port, 1 HDMI and 1 blank data port SIDE 2: 2 power outlets, 1 dual USB-A port, 1 VGA and 1 blank data port
- G15B SIDE 1: 2 power outlets, 1 blank data port, 1 HDMI, and 1 USB A + C combo SIDE 2: 2 power outlets, 1 blank data port, 1 VGA and 1 USB-A + C combo

INTERLINK IQ DOUBLE PIVOTING M2X-B POWER GROMMET (G15A, G15B)

- Non-sequential "Daisy chain" solution
- Interlink IQ system must begin with a smart box with starter plug (or full set)
- 1 touch door remains open during use
- Maximum of 4 units because G15 is double sided (F8)
- Two G15 units connected together will span 77½" from center of grommet 1 to center of grommet 2.
- Two G15 units connected together with 1 60" jumper will span 135½" from center of grommet 1 to center of grommet 2.
- Interlink IQ is plugged only. Hardwire is not available
- Built-in status indicator: green means go, red light indicates too many units
- UL recognized
- G15A Interlink has SIDE 1: 2 power outlets, 1 dual USB-A port, 1 HDMI and 1 blank data port SIDE 2: 2 power outlets, 1 dual USB-A port, 1 VGA and 1 blank data port
- G15B Interlink has SIDE 1: 2 power outlets, 1 blank data port, 1 HDMI, and 1 USB-A + C combo SIDE 2: 2 power outlets, 1 blank data port, 1 VGA and 1 USB-A + C combo

TRANSITIONAL JUMPER

- Jumper used to connect an older IQ version and new IQ system (as of November 2019)

POWER/DATA OASIS (G162)

- To be ordered with G16 cutout options
- Must be inserted and installed into cutouts in field
- Fits into CUT-G16C, CUT-G16E, CUT-G16LR, CUT-G16A, and CUT-G16CE options
- Silver or black powder coat
- The Power/Data Oasis may be utilized with any wire access base; however, for the cleanest aesthetic, specify the panel base kit
- Power/Data Oasis (G162) unit will feature 6 power receptacles with 2 108" power cords and molded plugs rated at 12 amps 120 volts, 2 charging USB (2.1); 1 HDMI; 1 VGA with mini stereo, and 1 RJ45 data jack
- Power/Data Oasis hardwire unit (G162) will feature 6 power receptacles with 1 72" long hardwire conduit covered pigtail cable on 1 end which carries 2 20 amp 120 volt circuits to power 2 sides of the Power/Data Oasis, 2 charging USB (2.1); 1 HDMI; 1 VGA with mini stereo, and 1 RJ45 data jack. Not Chicago Code
- Hardwire/Chicago Code available
- Standard units have cords that are 9 ft. long rated at 15 amps 120 volts and molded plug. Hardwire units have cords that are 6 ft. long rated at 20 amps 120 volts and molded plug
- Cannot be field scribed for cutout
- UL Listed
- For more specification information: www.electri-cable.com

GLENBEIGH PIVOTING POWER GROMMET (G17A, G17B, G17C)

- Accommodates table thickness of ¾"-1¼"
- 10 ft. power cord with 3-prong molded plug
- Spill-proof
- Available in silver, black or white powder coat
- Hardwire/Chicago Code available
- 15 amp, 120v (hardwire models)
- 10 ft. metal conduit (hardwire models)
- UL Listed
- G17A available with 2 power outlets
- G17B available with 1 power outlet and 1 USB-A + C combo port
- G17C available with 1 power outlet

INTERLINK IQ SYSTEM (G17A, G17B, G17C)

- Non-sequential "Daisy chain" solution
- Interlink IQ system must begin with a smart box with starter plug (or full set)
- Jumper or transitional jumper used between the smart box and G17 IQ grommets when the span between grommet locations are greater than 60"
- Interlink IQ is plugged only. Hardwire is not available
- Built-in status indicator: green means go, red light indicates too many units
- UL recognized
- G17A Interlink has 2 power outlets
- G17B Interlink has 1 power and 1 dual USB-A + C combo
- G17C Interlink has 1 power outlet

POWER GROMMET (G23)

- Field installable when CUT-G23 option is specified
- Die-cast zinc in black or silver powder coat
- Includes 2 power outlets and 2 power USB ports
- Silver, black, or white
- Hardwire available
- 9 foot, 15 amp cord
- UL Listed

DAISY LINK (G23)

- Field installable when CUT-G23 option is specified
- Silver, black, or white
- Includes 2 15 amp power receptacles (no data) and 2 USB (3.0 power) power ports
- Thumbscrew version with 2 backerplates and 2¼"-20 thumbscrews
- 72" single circuit power cord for plugged starter unit; 48¾" conduit and 24" power cord with 20 amp molded plug
- 72¾" multi-circuit conduit power cord for hardwire starter unit
- Add-on unit does include a 60" jumper; jumper cable is 60¾" metal conduit with female to female ends for connecting 2 daisy link power grommets
- UL Listed

DAISY LINK JUMPER

- 80", 180", or 240" jumper cable is metal conduit with female to female ends to connect 2 daisy link power grommets when the power is jumped between tables

NODE POWER GROMMET (G33)

- For use with select Maneuver tables
- Available in black, silver, or white powder coat
- Contains 1 electrical outlet and 2 USB-A ports
- 72" 15 amp power cord included
- Maximum worksurface thickness is 1½"
- UL approved
- Tamper resistant
- Spill-proof

POWER TOWER

- Available in gloss black or silver with black faceplates, or gloss white with white faceplates
- Unit comes with (12) 15 amp 120 volt, tamper resistant receptacles and (6) USB 3.0 power charging ports that provide 2.1 amps. Data ports are not provided
- 108" 15 amp power cord included
- Circuit breaker located in the bottom of the tower for overload protection
- 6 rubber feet prevent sliding and provide ¾" floor clearance
- Tri-core design allows for 360° power access
- 3 slots in the base provide an anchor for tethering the unit to the floor or pole if stationary application is desired

UNDERSURFACE POWER/DATA

- Contains 1 electrical outlet and 2 USB ports
- Mounts under surface
- 72" power cord included

MOIRÉ POWER CENTER (G10A, G10B)

- Installs into round G10 (3" dia.) worksurface grommet
- Adjusts to worksurfaces thickness of 1⅞"-1⅝"
- Available in light grey, black, or white
- Spill-proof
- 6' power cord with 3-prong molded plug (15 amp)
- UL Listed
- (G10A) 2 power outlets and 2 USB-A dual ports
- (G10B) 4 power outlets

AXIL BLUETOOTH POWER CENTER

- Freestanding, portable desktop outlet with 1 Bluetooth speaker (with stainless steel grille), 1 power outlet and 1 USB-A port
- Spill-proof
- Available in white, silver and black powder coat
- 6 ft power cord with 3-prong molded plug (15 amp)
- UL Listed

DEAN POWER CENTER

- Mounts to the edge of a worksurface with no table cut outs or installation required
- Adjusts to worksurface thickness up to 2¼"
- Molded plastic faceplate with an anodized aluminum housing
- Available in light grey, black, and white
- Spill-proof
- 6' power cord with 3-prong molded plug (15 amp)
- UL Listed
- Available with 2 power
- Available with 1 power, 1 dual USB-A dual port
- Available with 3 power
- Available with 2 power, 1 USB-A + C combo, 2 power, and 1 USB-A dual port

BURELÉ POWER CENTER

- Mounts to the edge of a worksurface with no table cut outs or installation required
- Adjusts to worksurfaces from ¼"-2¾"
- Available in light grey, black or white
- Spill-proof
- 6' power cord with 3-prong molded plug (15 amp)
- UL Listed
- Available with 2 power, 1 dual USB-A port, 1 USB-C port
- Available with 4 power

HITCH

- Freestanding, portable charging center
- Available in light grey, black, or white
- 20w power supply
- Battery: 3.6v, 11.6ah (amp hours), 41.76 wh (watt hours)
- Dead to full charge time is 4½ hours
- 6' charging cord is 5 volts at 4 amps
- Cannot charge devices while unit is being charged
- Display light indicates full charge
- UL Listed
- Hitch models have a Lithium battery and MUST ship separately via Fed Ex Ground

4-TRAC

- Used as a power distribution in conjunction with our electrical grommet options
- 4 wires, 2 circuits, 20 amps each (circuit 1 and 2 only)
- 13 duplex receptacles per circuit (26) 15 amp duplex
- UL Listed as a manufactured wiring system
- Ease of install and reconfigure options
- Field installable

GARCIA

- Mounts to the undersurface of a worksurface
- Available in Black, White, and Fog
- Includes a 72" cord
- Available with 2 USB-A
- Available with 1 USB-A, 1 USB-C
- UL Listed

ACCESSORIES

TULLY

- Features a long tail that bends and wraps around cushions for stability; tucks in between the cushions and arms of chairs
- Available in Black, White, and Fog
- Includes a 120" cord
- Available with 1 Power, 1 USB-A, 1 USB-C
- Tamper Resistant
- UL Listed

TRIPPEL

- Set on surface
- Available in Black, White, and Fog
- Includes a 108" cord
- Available with 2 power, 2 USB-A
- Features Qi Wireless Charging which will work with the following:
 - Apple iPhone 8, 8 Plus, X
 - Samsung Galaxy S9, S9+, Note 5, Note 8, S8, S8+, S7, S7 Active, S7 Edge, S6, S6 Edge
 - Lg V30, G6 (US version only), G4 (optional), G3 (optional)
 - Microsoft Lumia 1520, 1020, 930, 929, 928, 920
 - Google Nexus 4, 5, 6, 7 (2013)
 - BlackBerry Pov Z30
- UL Listed

WILLOW

- Set on surface
- Available in Beech with a Teal cord, Walnut with a Black cord, or Black with a Black cord
- Includes a 108" cord
- Available with 1 power, 1 USB-A
- Tamper resistant
- UL listed

POWER STRIP

- Available in Black
- Includes a 120" cord
- Available with 6 power
- UL Listed

HEARTH

- Birdhouse shaped power supply with 1 Power and 1 Dual USB-A
- Handmolded concrete body with a wood base detail
- 108" solid brass braided cord
- UL Listed

APPARATUS

- Set on surface
- Available in Flat black with a black braided cord, and matte white with a white braided cord
- 108" cord
- 1 Power and 1 Dual USB-A
- Manufactured with sturdy cast aluminum
- ETL Listed

SIDEKICK

- Felt sofa arm overlay
- Heather Gray unit features power and a braided cord in Poppy. Camel unit features a power and braided cord in Dusk
- 108" cord
- Features a felt pocket to store items while charging
- ETL and UL Listed

ASHLEY DUO


- Includes 2 power, 2 USB
- 72" cord
- Must have at least 5.5" of clearance under surface at point of application to be able to mount
- Ashley Surface Clamp Mount models are only compatible with standard flat rim profile worksurfaces thicknesses between ½" (12.7mm) – 2⅜" (71mm).
- UL Listed

TACK BOARD VERTICAL TEXTILE OPTIONS

Grade A	Grade B
Compose	Basket
Crossroads	Frenzied
Dune	Fuse
Fusion	Linen
Infuse	Lyko
Meander	Pact
Merge	Prose
Mykel	Savile
Plinth	
Repetition	
Tapestry	COM (Grade B)
Universe	

RAILROADED TACK BOARD

- Shaded rectangle portrays a railroaded privacy/modesty screen.



DIMENSION KEY

D	Depth
W	Width
H	Height
A	Overhang: Approach Side
KW	Kneespace Width




ACCESSORIES

TO ORDER, SPECIFY:

1. Model Number

SAMPLE MODEL NUMBER:

15NTVMAS

	MODEL NO./DESCRIPTION	LIST PRICE	DIMENSIONS					CARTONED WEIGHT	CUBIC FEET
			D	W	H	A	KW		
FLAT PANEL WALL MOUNT KIT 	15NTVMAS Black	\$ 484	15¾	47¼	15¾	31¼	—	25 lbs.	2.0
	- Adjustable Universal Wall Mount adjusts to allow installation of most 32" to 80" flat panel - Must mount onto an architectural wall - Black powder coat - VESA mounting compliant								
PERSONAL MARKER BOARD 	NAC1214MBL Laminate	\$ 196	¾	12	14	—	—	lbs.	
	- High gloss, white laminate marker board - Marker board and hooks sold separately - Hooks to attach to bottom of worksurface to hang marker boards								
SINGLE HOOK 	NAC02HKS Stainless Steel	\$ 78	¾	½	1¾	—	—	lbs.	
	Hooks to attach to bottom of worksurface to hang marker boards								
DOUBLE HOOK 	NAC03HKD Aluminum	\$ 43	1¾	3¼	2½	—	—	lbs.	
	- Hooks to attach to bottom of worksurface to hang marker boards - Cannot be used on knife rim tops								







Shaded model numbers are available on our "To You in 10 Days or Less" Quick Delivery program and will be delivered in 10 days or less.

TO ORDER, SPECIFY:

1. Model Number

SAMPLE MODEL NUMBER:

NAC18TLDBPUS

	MODEL NO./DESCRIPTION	LIST PRICE	D	W	H	A	KW	CARTONED WEIGHT	CUBIC FEET
ELEMENT LED DESKTOP LIGHT 	NAC18TLDBPUS Task Light w/Desktop Base, Plug/USB, Silver	\$ 1360	14	—	14	—	—	3 lbs.	0.7
	• Available in silver • MCX LED freestanding light • Working height 18" and maximum reach 28" • 360° swivel from base, 135° front-to-back head tilt, 90° side-to-side head rotation • 1 120VAC 3 prong receptacle electrical outlet • 7 levels of light adjustment • 2 USB charging ports providing 1 amp 5VDC of power								
PIPER LINEAR LED DESKTOP LIGHT 	NAC18TLDBUH Task Light w/Desktop Base, USB, White	\$ 761	11½	7½	18¼	—	—	10 lbs.	1.2
	• Available in white • LED freestanding light • 3 color temps, dimming • 1 USB charging port that provides 5 volts and 1 amp of charging power • 4'11" white cord plus a 3' cord extender • UL Listed								
REVO DESKTOP LIGHT 	NAC1406TLDB1S Silver	\$ 714			14¾	—	—	8.31 lbs.	1.82
	NAC1406TLDB1B Black	714			14¾	—	—	8.31 lbs.	1.82
	NAC1406TLDB1W White	714			14¾	—	—	8.31 lbs.	1.82
	• 108" power cord • ETL Listed								
VOYAGE DESKTOP LIGHT 	NAC1408TLDB1S Silver	\$ 714			14¾	—	—	8.31 lbs.	1.82
	NAC1408TLDB1B Black	714			14¾	—	—	8.31 lbs.	1.82
	NAC1408TLDB1W White	714			14¾	—	—	8.31 lbs.	1.82
	• 108" power cord • ETL Listed								
CONVENIENCE OUTLET 	NAC0902EL5C Black	\$ 296	13	22	1¾	—	—	2 lbs.	0.3
	• 5 grounded electrical receptacles • 1 telephone jack with 14 ft. cord • 10 ft. power cord • Includes remote on/off power switch • Black housing and cords • UL Listed								
POWER TOWER 	NAC25ELPTB Black	\$ 3078	16¾	16¾	25½	—	—	68 lbs.	6.5
	NAC25ELPTH White	3078	16¾	16¾	25½	—	—	68 lbs.	6.5
	NAC25ELPTS Silver	3078	16¾	16¾	25½	—	—	68 lbs.	6.5
	• Available in gloss black or silver with black faceplates, or gloss white with white faceplates • Unit comes with (12) 15 amp 120 volt, tamper resistant receptacles and (6) USB 3.0 power charging ports that provide 2.1 amps. Data ports are not provided • 108" 15 amp power cord included • Circuit breaker located in the bottom of the tower for overload protection • 6 rubber feet prevent sliding and provide ¾" floor clearance • Tri-core design allows for 360° power access • 3 slots in the base provide an anchor for tethering the unit to the floor or pole if stationary application is desired								

ACCESSORIES



Shaded model numbers are available on our "To You in 10 Days or Less" Quick Delivery program and will be delivered in 10 days or less.



TO ORDER, SPECIFY:

1. Model Number

SAMPLE MODEL NUMBER:


NACG10EL

	MODEL NO./DESCRIPTION	LIST PRICE	DIMENSIONS					CARTONED WEIGHT	CUBIC FEET
			D	W	H	A	KW		
ROUND GROMMET (G10)	NACG10EL Electrical Grommet	\$ 623	4 1/4	4 1/4	5	—	—	2 lbs.	0.12
	NACG10 Grommet	101	4 1/4	4 1/4	1 1/4	—	—	1 lbs.	0.12


**MOIRÉ,
G10 POWER/USB GROMMET**


NACG10AELPGB Black	\$ 583	—	—	1.7 lbs.	0.24
NACG10AELPGW White	583	—	—	1.7 lbs.	0.24
NACG10AELPGG Light Grey	583	—	—	1.7 lbs.	0.24

- 2 power, 2 dual USB-A, 2.0 amps
- Black cord on black and light grey, white cord on white, 6 ft, 15 amp plugged cord
- Fits in G10 grommet hole diameter 3"
- Adjust to thickness from 1 3/16" - 1 1/8"
- UL Listed

**MOIRÉ,
G10 POWER GROMMET**


NACG10BELPGB Black	\$ 373	—	—	1.7 lbs.	0.24
NACG10BELPGW White	373	—	—	1.7 lbs.	0.24
NACG10BELPGG Light Grey	373	—	—	1.7 lbs.	0.24

- 4 power
- Black, 6 ft, 15 amp plugged cord with built in circuit breaker
- Black cord on black and light grey, white cord on white
- Fits in G10 grommet hole diameter 3"
- Adjust to thickness from 1 3/16" - 1 1/8"
- UL Listed

TO ORDER, SPECIFY:

1. Model Number

SAMPLE MODEL NUMBER:

NACG12AELPGB

PIVOTING POWER GROMMET
(MHO-B) (G12A)

NACG12AELPGB

MODEL NO./DESCRIPTION	LIST PRICE	DIMENSIONS					CARTONED WEIGHT	CUBIC FEET
		D	W	H	A	KW		
NACG12AELPGB Black	\$ 809	4%	8%	1½	—	—	2 lbs.	0.2
NACG12AELPGS Silver	809	4%	8%	1½	—	—	2 lbs.	0.2
NACG12AELPGW White	809	4%	8%	1½	—	—	2 lbs.	0.2
NACG12AELPG1B Braided Cord, Black	\$ 882	4%	8%	1½	—	—	2 lbs.	0.2
NACG12AELPG1S Braided Cord, Silver	882	4%	8%	1½	—	—	2 lbs.	0.2
NACG12AELPG1W Braided Cord, White	882	4%	8%	1½	—	—	2 lbs.	0.2
NACG12AELHCB Hardwire, Black	\$ 809	4%	8%	1½	—	—	3 lbs.	0.2
NACG12AELHCS Hardwire, Silver	809	4%	8%	1½	—	—	3 lbs.	0.2
NACG12AELHCW Hardwire, White	809	4%	8%	1½	—	—	3 lbs.	0.2

- 2 power outlets, 1 dual USB-A port, and 1 blank port
- Units are powder coated

PIVOTING POWER GROMMET
(MHO-B) (G12B)

NACG12BELPGB

NACG12BELPGB Black	\$ 867	4%	8%	1½	—	—	2 lbs.	0.2
NACG12BELPGS Silver	867	4%	8%	1½	—	—	2 lbs.	0.2
NACG12BELPGW White	867	4%	8%	1½	—	—	2 lbs.	0.2
NACG12BELPG1B Braided Cord, Black	\$ 937	4%	8%	1½	—	—	2 lbs.	0.2
NACG12BELPG1S Braided Cord, Silver	937	4%	8%	1½	—	—	2 lbs.	0.2
NACG12BELPG1W Braided Cord, White	937	4%	8%	1½	—	—	2 lbs.	0.2
NACG12BELHCB Hardwire, Black	\$ 867	4%	8%	1½	—	—	3 lbs.	0.2
NACG12BELHCS Hardwire, Silver	867	4%	8%	1½	—	—	3 lbs.	0.2
NACG12BELHCW Hardwire, White	867	4%	8%	1½	—	—	3 lbs.	0.2

- 2 power outlets and 2 USB-A + C ports
- Units are powder coated

PIVOTING POWER GROMMET
(MHO-B) (G12C)

NACG12CELPGB

NACG12CELPGB Black	\$ 600	4%	8%	1½	—	—	2 lbs.	0.2
NACG12CELPGS Silver	600	4%	8%	1½	—	—	2 lbs.	0.2
NACG12CELPGW White	600	4%	8%	1½	—	—	2 lbs.	0.2
NACG12CELPG1B Braided Cord, Black	\$ 671	4%	8%	1½	—	—	2 lbs.	0.2
NACG12CELPG1S Braided Cord, Silver	671	4%	8%	1½	—	—	2 lbs.	0.2
NACG12CELPG1W Braided Cord, White	671	4%	8%	1½	—	—	2 lbs.	0.2
NACG12CELHCB Hardwire, Black	\$ 600	4%	8%	1½	—	—	3 lbs.	0.2
NACG12CELHCS Hardwire, Silver	600	4%	8%	1½	—	—	3 lbs.	0.2
NACG12CELHCW Hardwire, White	600	4%	8%	1½	—	—	3 lbs.	0.2

- 4 power outlets with 72" circuit breaker cord
- Units are powder coated

ACCESSORIES

TO ORDER, SPECIFY:


1. Model Number

SAMPLE MODEL NUMBER:


NACG12AELPD2IQKB

MODEL NO./DESCRIPTION	LIST PRICE	DIMENSIONS					CARTONED WEIGHT	CUBIC FEET
		D	W	H	A	KW		
INTERLINK IQ SYSTEM (G12A)	FULL SET OF 8 UNITS							
NACG12AELPD2IQKB Set of 8, Black	\$ 6964	4%	8¼	1½	—	—	25 lbs.	4.0
NACG12AELPD2IQKS Set of 8, Silver	6964	4%	8¼	1½	—	—	25 lbs.	4.0
NACG12AELPD2IQKW Set of 8, White	6964	4%	8¼	1½	—	—	25 lbs.	4.0

- Full sets include 8 grommets and smart box with starter plug



NACG12AELPD2IQKS



NACG12AELPD2IQB

INTERLINK GROMMETS


NACG12AELPD2IQB Interlink Grommet, Black	\$ 788	4%	8¼	1½	—	—	3 lbs.	3.0
NACG12AELPD2IQS Interlink Grommet, Silver	788	4%	8¼	1½	—	—	3 lbs.	3.0
NACG12AELPD2IQW Interlink Grommet, White	788	4%	8¼	1½	—	—	3 lbs.	3.0

- Each power grommet includes 2 power outlets, 1 port with dual USB-A, and 1 blank port that can accommodate 1 of 8 provided adapter plates
- Non-sequential "Daisy chain" solution for flip/nest training tables
- When Interlink solution is ordered, flip/nest training table must specify CUT-G12C grommet
- When Interlink solution is ordered, use table ganging brackets
- Specify model number only
- Interlink cord with plug is 120" in length
- Length of cord from coupler to unit on all units is 14"
- Length from coupler to coupler is 60"
- Units are powder coated
- Must order smart box with plug separately


INTERLINK IQ SMART BOX AND JUMPER

NACEL2IQBB Interlink IQ smart box w/starter plug	\$ 712	—	120	—	—	—	3 lbs.	0.15
NACEL2IQ60J Interlink IQ Jumper-60"	158	—	60	—	—	—	3 lbs.	0.15
NACEL2IQ60TJ Transitional Jumper	166	—	60	—	—	—	3 lbs.	0.15


- Must order smart box with plug separately
- UL Recognized
- Non-sequential "Daisy chain" solution
- Interlink IQ system must begin with a smart box with plug (or full set)
- Jumper used between the smart box with plug and grommets when the span between grommet locations are greater than 60"
- Transitional jumper (connections on both ends) used only when using an older IQ model and a new IQ model (as of November 2019)
- Jumpers count as one connection (maximum of 8)
- The Interlink IQ system is ONLY plugged. This system cannot be hardwired
- Units are powder coated
- Built-in status indicator: green means go, red light indicates too many units
- See charts on pages 572-573



NACEL2IQBB



NACEL2IQ60J



NACEL2IQ60TJ

TO ORDER, SPECIFY:

1. Model Number

SAMPLE MODEL NUMBER:

NACG12BELPD2IQKB


	MODEL NO./DESCRIPTION	LIST PRICE	DIMENSIONS			A	KW	CARTONED WEIGHT	CUBIC FEET
			D	W	H				

INTERLINK IQ SYSTEM (G12B)


FULL SET OF 8 UNITS

NACG12BELPD2IQKB	Set of 8, Black	\$ 7785	4%	8%	1½	—	—	25 lbs.	4.0
NACG12BELPD2IQKS	Set of 8, Silver	7785	4%	8%	1½	—	—	25 lbs.	4.0
NACG12BELPD2IQKW	Set of 8, White	7785	4%	8%	1½	—	—	25 lbs.	4.0

- Full sets include 8 grommets and smart box with starter plug



NACG12BELPD2IQKS



NACG12BELPD2IQB

INTERLINK GROMMETS


NACG12BELPD2IQB	Interlink Grommet, Black	\$ 849	4%	8%	1½	—	—	3 lbs.	3.0
NACG12BELPD2IQS	Interlink Grommet, Silver	849	4%	8%	1½	—	—	3 lbs.	3.0
NACG12BELPD2IQW	Interlink Grommet, White	849	4%	8%	1½	—	—	3 lbs.	3.0

- Each power grommet includes 2 power outlets and 2 charging USB-A + C ports
- Non-sequential "Daisy chain" solution for flip/nest training tables
- When Interlink solution is ordered, flip/nest training table must specify CUT-G12C grommet
- When Interlink solution is ordered, use table ganging brackets
- Specify model number only
- Interlink cord with plug is 120" in length
- Length of cord from coupler to unit on all units is 14"
- Length from coupler to coupler is 60"
- Units are powder coated
- Must order smart box with plug separately


INTERLINK IQ SMART BOX AND JUMPER

NACEL2IQBB	Interlink IQ smart box w/starter plug	\$ 712	—	120	—	—	—	3 lbs.	0.15
NACEL2IQ60J	Interlink IQ Jumper-60"	158	—	60	—	—	—	3 lbs.	0.15
NACEL2IQ60TJ	Transitional Jumper	166	—	60	—	—	—	3 lbs.	0.15


- Must order smart box with plug separately
- UL Recognized
- Non-sequential "Daisy chain" solution
- Interlink IQ system must begin with a smart box with plug (or full set)
- Jumper used between the smart box with plug and grommets when the span between grommet locations are greater than 60"
- Transitional jumper (connections on both ends) used only when using an older IQ model and a new IQ model (as of November 2019)
- Jumpers count as one connection (maximum of 8)
- The Interlink IQ system is ONLY plugged. This system cannot be hardwired
- Units are powder coated
- Built-in status indicator: green means go, red light indicates too many units
- See charts on pages 572-573



NACEL2IQBB



NACEL2IQ60J



NACEL2IQ60TJ


ACCESSORIES

TO ORDER, SPECIFY:

1. Model Number

SAMPLE MODEL NUMBER:


NACG15AELPGB

**1 TOUCH DOUBLE PIVOTING
POWER GROMMET (M2X-B)
(G15A)**

NACG15AELPGS

MODEL NO./DESCRIPTION	LIST PRICE	DIMENSIONS					CARTONED CUBIC	
		D	W	H	A	KW	WEIGHT	FEET
NACG15AELPGB Black	\$ 1879	8	9¼	1½	—	—	5 lbs.	0.4
NACG15AELPGS Silver	1879	8	9¼	1½	—	—	5 lbs.	0.4
NACG15AELPGW White	1879	8	9¼	1½	—	—	5 lbs.	0.4
NACG15AELHCB Black/Hardwire	\$ 1879	8	9¼	1½	—	—	5 lbs.	0.4
NACG15AELHCS Silver/Hardwire	1879	8	9¼	1½	—	—	5 lbs.	0.4
NACG15AELHCW White/Hardwire	1879	8	9¼	1½	—	—	5 lbs.	0.4

- See pages 554-556 for detailed specifications
- Units are powder coated
- Side 1: 2 power, 1 dual USB-A, 1 HDMI, and 1 blank
- Side 2: 2 power, 1 dual USB-A, 1 VGA, and 1 blank
- Units include 2 72" long cords (1 for each side)

**1 TOUCH DOUBLE PIVOTING
POWER GROMMET (M2X-B)
(G15B)**

NACG15BELPGB

NACG15BELPGB Black	\$ 2089	8	9¼	1½	—	—	5 lbs.	0.4
NACG15BELPGS Silver	2089	8	9¼	1½	—	—	5 lbs.	0.4
NACG15BELPGW White	2089	8	9¼	1½	—	—	5 lbs.	0.4
NACG15BELHCB Black/Hardwire	\$ 2089	8	9¼	1½	—	—	5 lbs.	0.4
NACG15BELHCS Silver/Hardwire	2089	8	9¼	1½	—	—	5 lbs.	0.4
NACG15BELHCW White/Hardwire	2089	8	9¼	1½	—	—	5 lbs.	0.4







- See pages 554-556 for detailed specifications
- Units are powder coated
- Side 1: 2 power, 1 dual USB-A + C, 1 HDMI, and 1 blank
- Side 2: 2 power, 1 dual USB-A + C, 1 VGA, and 1 blank
- Units include 2 72" long cords (1 for each side)

TO ORDER, SPECIFY:

1. Model Number

SAMPLE MODEL NUMBER:

NACG15AELPD2IQKB

	MODEL NO./DESCRIPTION	LIST PRICE	DIMENSIONS					CARTONED WEIGHT	CUBIC FEET
			D	W	H	A	KW		
INTERLINK IQ SYSTEM (M2X-B) (G15A)  NACG15AELPD2IQKS  SIDE 1  SIDE 2 NACG15AELPD2IQB  NACEL2IQBB  NACEL2IQ60J  NACEL2IQ60TJ	FULL SET OF 4 UNITS								
	NACG15AELPD2IQKB Set of 4, Black	\$ 7470	8	9¾	1½	—	—	20 lbs.	3.2
	NACG15AELPD2IQKS Set of 4, Silver	7470	8	9¾	1½	—	—	20 lbs.	3.2
	NACG15AELPD2IQKW Set of 4, White	7470	8	9¾	1½	—	—	20 lbs.	3.2
• Full sets include 4 grommets and smart box with starter plug									
INTERLINK GROMMETS									
	NACG15AELPD2IQB Interlink Grommet, Black	\$ 1667	8	9¾	1½	—	—	5 lbs.	0.4
	NACG15AELPD2IQS Interlink Grommet, Silver	1667	8	9¾	1½	—	—	5 lbs.	0.4
	NACG15AELPD2IQW Interlink Grommet, White	1667	8	9¾	1½	—	—	5 lbs.	0.4
• Units are powder coated • Interlink IQ full set is a set of 4 (8 total sides) • Maximum is 4 units • Side 1: 2 power, 1 dual USB-A, 1 HDMI, and 1 blank • Side 2: 2 power, 1 dual USB-A, 1 VGA, and 1 blank • Must order smart box with plug separately									
INTERLINK IQ SMART BOX AND JUMPER									
	NACEL2IQBB Interlink IQ smart box w/starter plug	\$ 712	—	120	—	—	—	3 lbs.	0.15
	NACEL2IQ60J Interlink IQ Jumper-60"	158	—	60	—	—	—	3 lbs.	0.15
	NACEL2IQ60TJ Transitional Jumper	166	—	60	—	—	—	3 lbs.	0.15
• Must order smart box with plug separately • UL Recognized • Non-sequential "Daisy chain" solution • Interlink IQ system must begin with a smart box with plug (or full set) • 1 touch door remains open during use • Jumper used between the smart box with plug and grommets when the span between grommet locations are greater than 60" • Transitional jumper (connections on both ends) used only when using an older IQ model and a new IQ model (as of November 2019) • Jumpers count as one connection (maximum of 4) • The Interlink IQ system is ONLY plugged. This system cannot be hardwired • Units are powder coated • Built-in status indicator: green means go, red light indicates too many units • See charts on pages 572-573									

ACCESSORIES

TO ORDER, SPECIFY:

1. Model Number

SAMPLE MODEL NUMBER:

NACG15BELPD2IQKB

	MODEL NO./DESCRIPTION		PRICE	D	W	H	A	KW	WEIGHT	FEET
	FULL SET OF 4 UNITS									
	NACG15BELPD2IQKB	Set of 4, Black	\$ 7831	8	9¾	1½	—	—	20 lbs.	3.2
	NACG15BELPD2IQKS	Set of 4, Silver	7831	8	9¾	1½	—	—	20 lbs.	3.2
	NACG15BELPD2IQKW	Set of 4, White	7831	8	9¾	1½	—	—	20 lbs.	3.2

- Full sets include 4 grommets and smart box with starter plug

INTERLINK GROMMETS


NACG15BELPD2IQB Interlink Grommet, Black	\$ 1874	8	9¼	1½	—	—	5 lbs.	0.4
NACG15BELPD2IQS Interlink Grommet, Silver	1874	8	9¼	1½	—	—	5 lbs.	0.4
NACG15BELPD2IQW Interlink Grommet, White	1874	8	9¼	1½	—	—	5 lbs.	0.4

- Units are powder coated
- Side 1: 2 power, 1 dual USB-A + C, 1 HDMI, and 1 blank
- Side 2: 2 power, 1 dual USB-A + C, 1 VGA, and 1 blank
- 1 touch door remains open during use
- Interlink IQ full set is a set of 4 (8 total sides)
- Maximum is 4 units
- Must order smart box with plug separately


INTERLINK IQ SMART BOX AND JUMPER

NACEL2IQBB Interlink IQ smart box w/starter plug	\$ 712	—	120	—	—	—	3 lbs.	0.15
NACEL2IQ60J Interlink IQ Jumper-60"	158	—	60	—	—	—	3 lbs.	0.15
NACEL2IQ60TJ Transitional Jumper	166	—	60	—	—	—	3 lbs.	0.15


- Must order smart box with plug separately
- UL Recognized
- Non-sequential "Daisy chain" solution
- Interlink IQ system must begin with a smart box with plug (or full set)
- 1 touch door remains open during use
- Jumper used between the smart box with plug and grommets when the span between grommet locations are greater than 60"
- Transitional jumper (connections on both ends) used only when using an older IQ model and a new IQ model (as of November 2019)
- Jumpers count as one connection (maximum of 4)
- The Interlink IQ system is ONLY plugged. This system cannot be hardwired
- Units are powder coated
- Built-in status indicator: green means go, red light indicates too many units
- See charts on pages 572-573



NACG15BELPD2IQKS




SIDE 1




SIDE 2


NACG15BELPD2IQB



NACEL2IQBB



NACEL2IQ60J



NACEL2IQ60TJ


TO ORDER, SPECIFY:

1. Model Number

SAMPLE MODEL NUMBER:


NACG162ELB

POWER/DATA OASIS (G162)



MODEL NO./DESCRIPTION	LIST PRICE	DIMENSIONS					CARTONED WEIGHT	CUBIC FEET
		D	W	H	A	KW		
NACG162ELB Black	\$ 3429	9	15	4	—	—	8 lbs.	1.2
NACG162ELS Silver	3429	9	15	4	—	—	8 lbs.	1.2
NACG162ELHB Black/Hardwire/Modular Connect	\$ 4001	9	15	4	—	—	8 lbs.	1.2
NACG162ELHS Silver/Hardwire/Modular Connect	4001	9	15	4	—	—	8 lbs.	1.2
NACG162ELHCB Black/Hardwire	\$ 4001	9	15	4	—	—	8 lbs.	1.2
NACG162ELHCS Silver/Hardwire	4001	9	15	4	—	—	8 lbs.	1.2

- See pages 554-556 for detailed specifications
- The Power/Data Oasis may be utilized with any wire access base; however, for the cleanest aesthetic, specify the panel base kit
- Units are powder coated
- Modular connect does not meet city code

HARDWIRE POWER/DATA OASIS
DAISY CHAIN KITS (G16)

SILVER POWDER COAT	BLACK POWDER COAT							
NACG162ELHS120LR	NACG162ELHB120LR	\$ 8163	9	15	4	—	—	41 lbs. 5.4
NACG162ELHS144LR	NACG162ELHB144LR	8163	9	15	4	—	—	42 lbs. 5.4
NACG162ELHS168LR	NACG162ELHB168LR	8163	9	15	4	—	—	42 lbs. 5.4
NACG162ELHS168A	NACG162ELHB168A	12693	9	15	4	—	—	50 lbs. 6.7
NACG162ELHS168CE	NACG162ELHB168CE	8163	9	15	4	—	—	41 lbs. 5.4
NACG162ELHS192LR	NACG162ELHB192LR	8163	9	15	4	—	—	43 lbs. 5.4
NACG162ELHS192A	NACG162ELHB192A	12693	9	15	4	—	—	50 lbs. 6.7
NACG162ELHS192CE	NACG162ELHB192CE	8163	9	15	4	—	—	41 lbs. 5.4
NACG162ELHS216LR	NACG162ELHB216LR	8163	9	15	4	—	—	43 lbs. 5.4
NACG162ELHS216A	NACG162ELHB216A	12693	9	15	4	—	—	50 lbs. 6.7
NACG162ELHS216CE	NACG162ELHB216CE	8163	9	15	4	—	—	41 lbs. 5.4
NACG162ELHS240LR	NACG162ELHB240LR	8163	9	15	4	—	—	43 lbs. 5.4
NACG162ELHS240A	NACG162ELHB240A	12693	9	15	4	—	—	50 lbs. 6.7
NACG162ELHS240CE	NACG162ELHB240CE	8163	9	15	4	—	—	41 lbs. 5.4

- Example Model: NACG162ELHS**120LR** (**120** - designates size of table top; **LR** - designates grommet locations); see pages 14-15 for details
- G16 Grommet CUTOUPS must be specified in the conference top in which the Power/Data Oasis units will be installed
- Kits include jumper cables and hardwire starter cable required to daisy chain the Power/Data Oasis units
- "LR" models include 2 Oasis units, "A" models include 3 Oasis units and "CE" models include 2 Oasis units
- Units are powder coated

ACCESSORIES

TO ORDER, SPECIFY:

1. Model Number

SAMPLE MODEL NUMBER:

NACG17AELPGB

1 TOUCH PIVOTING
POWER GROMMET (G17A)


MODEL NO./DESCRIPTION	LIST PRICE	DIMENSIONS					CARTONED WEIGHT	CUBIC FEET
		D	W	H	A	KW		
NACG17AELPGB Black	\$ 458	4¼	5¼	2½	—	—	3 lbs.	0.15
NACG17AELPGS Silver	458	4¼	5¼	2½	—	—	3 lbs.	0.15
NACG17AELPGW White	458	4¼	5¼	2½	—	—	3 lbs.	0.15
NACG17AELPG1B Braided Cord, Black	\$ 530	4¼	5¼	2½	—	—	3 lbs.	0.15
NACG17AELPG1S Braided Cord, Silver	530	4¼	5¼	2½	—	—	3 lbs.	0.15
NACG17AELPG1W Braided Cord, White	530	4¼	5¼	2½	—	—	3 lbs.	0.15
NACG17AELHCB Hardwire, Black	\$ 483	4¼	5¼	2½	—	—	3 lbs.	0.15
NACG17AELHCS Hardwire, Silver	483	4¼	5¼	2½	—	—	3 lbs.	0.15
NACG17AELHCW Hardwire, White	483	4¼	5¼	2½	—	—	3 lbs.	0.15

- Includes 2 power outlets
- Units are powder coated
- See pages 554-556 for details

1 TOUCH PIVOTING
POWER GROMMET (G17B)

NACG17BELPGB Black	\$ 471	4¼	5¼	2½	—	—	3 lbs.	0.15
NACG17BELPGS Silver	471	4¼	5¼	2½	—	—	3 lbs.	0.15
NACG17BELPGW White	471	4¼	5¼	2½	—	—	3 lbs.	0.15
NACG17BELPG1B Braided Cord, Black	\$ 541	4¼	5¼	2½	—	—	3 lbs.	0.15
NACG17BELPG1S Braided Cord, Silver	541	4¼	5¼	2½	—	—	3 lbs.	0.15
NACG17BELPG1W Braided Cord, White	541	4¼	5¼	2½	—	—	3 lbs.	0.15
NACG17BELHCB Hardwire, Black	\$ 568	4¼	5¼	2½	—	—	3 lbs.	0.15
NACG17BELHCS Hardwire, Silver	568	4¼	5¼	2½	—	—	3 lbs.	0.15
NACG17BELHCW Hardwire, White	568	4¼	5¼	2½	—	—	3 lbs.	0.15

- Includes 1 power outlet and 1 dual USB-A + C combo
- Units are powder coated
- See pages 554-556 for details

1 TOUCH PIVOTING
POWER GROMMET (G17C)

NACG17CELPGB Black	\$ 452	4¼	5¼	2½	—	—	3 lbs.	0.15
NACG17CELPGS Silver	452	4¼	5¼	2½	—	—	3 lbs.	0.15
NACG17CELPGW White	452	4¼	5¼	2½	—	—	3 lbs.	0.15
NACG17CELPG1B Braided Cord, Black	\$ 524	4¼	5¼	2½	—	—	3 lbs.	0.15
NACG17CELPG1S Braided Cord, Silver	524	4¼	5¼	2½	—	—	3 lbs.	0.15
NACG17CELPG1W Braided Cord, White	524	4¼	5¼	2½	—	—	3 lbs.	0.15
NACG17CELHCB Hardwire, Black	\$ 477	4¼	5¼	2½	—	—	3 lbs.	0.15
NACG17CELHCS Hardwire, Silver	477	4¼	5¼	2½	—	—	3 lbs.	0.15
NACG17CELHCW Hardwire, White	477	4¼	5¼	2½	—	—	3 lbs.	0.15

- Includes 1 power outlet
- Units are powder coated
- See pages 554-556 for details


TO ORDER, SPECIFY:

1. Model Number


SAMPLE MODEL NUMBER:

NACG17AELPD2IQKB


INTERLINK IQ SYSTEM (G17A)




NACG17AELPD2IQKS




NACG17AELPD2IQB



NACEL2IQBB



NACEL2IQ60J



NACEL2IQ60TJ

MODEL NO./DESCRIPTION

FULL SET OF 8 UNITS

NACG17AELPD2IQKB	Set of 8, Black	\$ 3860
NACG17AELPD2IQKS	Set of 8, Silver	3860
NACG17AELPD2IQKW	Set of 8, White	3860

- Full sets include 8 grommets and smart box with starter plug

INTERLINK GROMMETS

NACG17AELPD2IQB	Interlink Grommet, Black	\$ 470
NACG17AELPD2IQS	Interlink Grommet, Silver	470
NACG17AELPD2IQW	Interlink Grommet, White	470

- Must order smart box with plug separately

INTERLINK IQ SMART BOX AND JUMPER

NACEL2IQBB	Interlink IQ smart box w/starter plug	\$ 712
NACEL2IQ60J	Interlink IQ Jumper-60"	158
NACEL2IQ60TJ	Transitional Jumper	166

- Must order smart box with plug separately
- UL Recognized
- Non-sequential "Daisy chain" solution
- Interlink IQ system must begin with a smart box with plug (or full set)
- Jumper used between the smart box with plug and grommets when the span between grommet locations are greater than 60"
- Transitional jumper (connections on both ends) used only when using an older IQ model and a new IQ model (as of November 2019)
- Jumpers count as one connection (maximum of 8)
- The Interlink IQ system is ONLY plugged. This system cannot be hardwired
- Units are powder coated
- Built-in status indicator: green means go, red light indicates too many units
- See charts on pages 572-573

LIST PRICE	DIMENSIONS			A	KW	CARTONED WEIGHT	CUBIC FEET
	D	W	H				

4¼	5¼	2½	—	—	19 lbs.	1.55
4¼	5¼	2½	—	—	19 lbs.	1.55
4¼	5¼	2½	—	—	19 lbs.	1.55

4¼	5¼	2½	—	—	3 lbs.	0.15
4¼	5¼	2½	—	—	3 lbs.	0.15
4¼	5¼	2½	—	—	3 lbs.	0.15

—	120	—	—	—	3 lbs.	0.15
—	60	—	—	—	3 lbs.	0.15
—	60	—	—	—	3 lbs.	0.15






ACCESSORIES

TO ORDER, SPECIFY:

1. Model Number

SAMPLE MODEL NUMBER:

NACG17BELPD2IQKB






	MODEL NO./DESCRIPTION	LIST PRICE	DIMENSIONS					CARTONED WEIGHT	CUBIC FEET
			D	W	H	A	KW		
 NACG17BELPD2IQKS	FULL SET OF 8 UNITS								
	NACG17BELPD2IQKB Set of 8, Black	\$ 5130	4¼	5¼	2½	—	—	19 lbs.	1.55
	NACG17BELPD2IQKS Set of 8, Silver	5130	4¼	5¼	2½	—	—	19 lbs.	1.55
	NACG17BELPD2IQKW Set of 8, White	5130	4¼	5¼	2½	—	—	19 lbs.	1.55
	• Full sets include 8 grommets and smart box with starter plug								
 NACG17BELPD2IQB	INTERLINK GROMMETS								
	NACG17BELPD2IQB Interlink Grommet, Black	\$ 656	4¼	5¼	2½	—	—	3 lbs.	0.15
	NACG17BELPD2IQS Interlink Grommet, Silver	656	4¼	5¼	2½	—	—	3 lbs.	0.15
	NACG17BELPD2IQW Interlink Grommet, White	656	4¼	5¼	2½	—	—	3 lbs.	0.15
	• Must order smart box with plug separately								
 NACEL2IQBB	INTERLINK IQ SMART BOX AND JUMPER								
	NACEL2IQBB Interlink IQ smart box w/starter plug	\$ 712	—	120	—	—	—	3 lbs.	0.15
	NACEL2IQ60J Interlink IQ Jumper-60"	158	—	60	—	—	—	3 lbs.	0.15
	NACEL2IQ60TJ Transitional Jumper	166	—	60	—	—	—	3 lbs.	0.15
	• Must order smart box with plug separately • UL Recognized • Non-sequential "Daisy chain" solution • Interlink IQ system must begin with a smart box with plug (or full set) • Jumper used between the smart box with plug and grommets when the span between grommet locations are greater than 60" • Transitional jumper (connections on both ends) used only when using an older IQ model and a new IQ model (as of November 2019) • Jumpers count as one connection (maximum of 8) • The Interlink IQ system is ONLY plugged. This system cannot be hardwired • Units are powder coated • Built-in status indicator: green means go, red light indicates too many units • See charts on pages 572-573								
 NACEL2IQ60J									
 NACEL2IQ60TJ									

TO ORDER, SPECIFY:


1. Model Number

SAMPLE MODEL NUMBER:


NACG17CELPD2IQKB

	MODEL NO./DESCRIPTION	LIST PRICE	DIMENSIONS					CARTONED WEIGHT	CUBIC FEET
			D	W	H	A	KW		
INTERLINK IQ SYSTEM (G17C)  NACG17CELPD2IQKS	FULL SET OF 8 UNITS								
	NACG17CELPD2IQKB Set of 8, Black	\$ 3653	4¼	5¼	2½	—	—	19 lbs.	1.55
	NACG17CELPD2IQKS Set of 8, Silver	3653	4¼	5¼	2½	—	—	19 lbs.	1.55
	NACG17CELPD2IQKW Set of 8, White	3653	4¼	5¼	2½	—	—	19 lbs.	1.55
	• Full sets include 8 grommets and smart box with starter plug								
 NACG17CELPD2IQB	INTERLINK GROMMETS								
	NACG17CELPD2IQB Interlink Grommet, Black	\$ 443	4¼	5¼	2½	—	—	3 lbs.	0.15
	NACG17CELPD2IQS Interlink Grommet, Silver	443	4¼	5¼	2½	—	—	3 lbs.	0.15
	NACG17CELPD2IQW Interlink Grommet, White	443	4¼	5¼	2½	—	—	3 lbs.	0.15
	• Must order smart box with plug separately								
 NACEL2IQBB	INTERLINK IQ SMART BOX AND JUMPER								
	NACEL2IQBB Interlink IQ smart box w/starter plug	\$ 712	—	120	—	—	—	3 lbs.	0.15
	NACEL2IQ60J Interlink IQ Jumper-60"	158	—	60	—	—	—	3 lbs.	0.15
	NACEL2IQ60TJ Transitional Jumper	166	—	60	—	—	—	3 lbs.	0.15
	• Must order smart box with plug separately • UL Recognized • Non-sequential "Daisy chain" solution • Interlink IQ system must begin with a smart box with plug (or full set) • Jumper used between the smart box with plug and grommets when the span between grommet locations are greater than 60" • Transitional jumper (connections on both ends) used only when using an older IQ model and a new IQ model (as of November 2019) • Jumpers count as one connection (maximum of 8) • The Interlink IQ system is ONLY plugged. This system cannot be hardwired • Units are powder coated • Built-in status indicator: green means go, red light indicates too many units • See charts on pages 572-573								
 NACEL2IQ60J									
 NACEL2IQ60TJ									

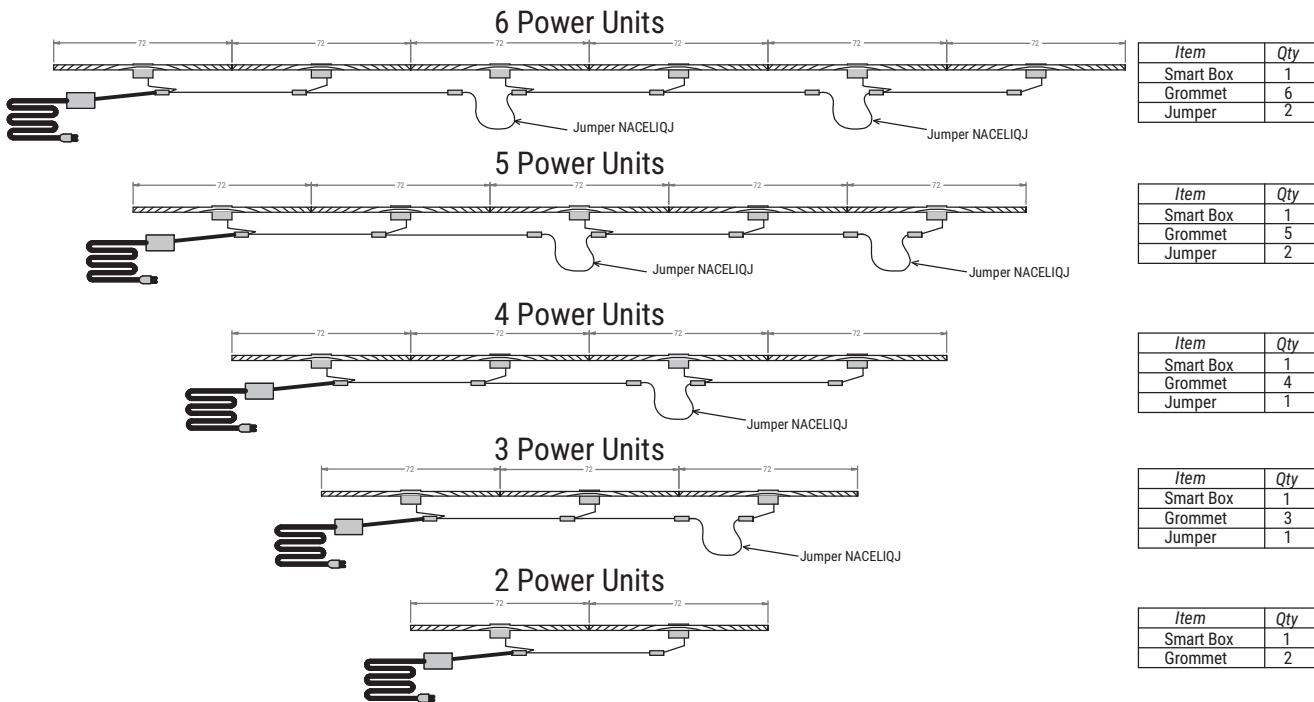
Configuration of IQ System for 72" WaveWorks Training Tables - Max of 6 IQ Units per run



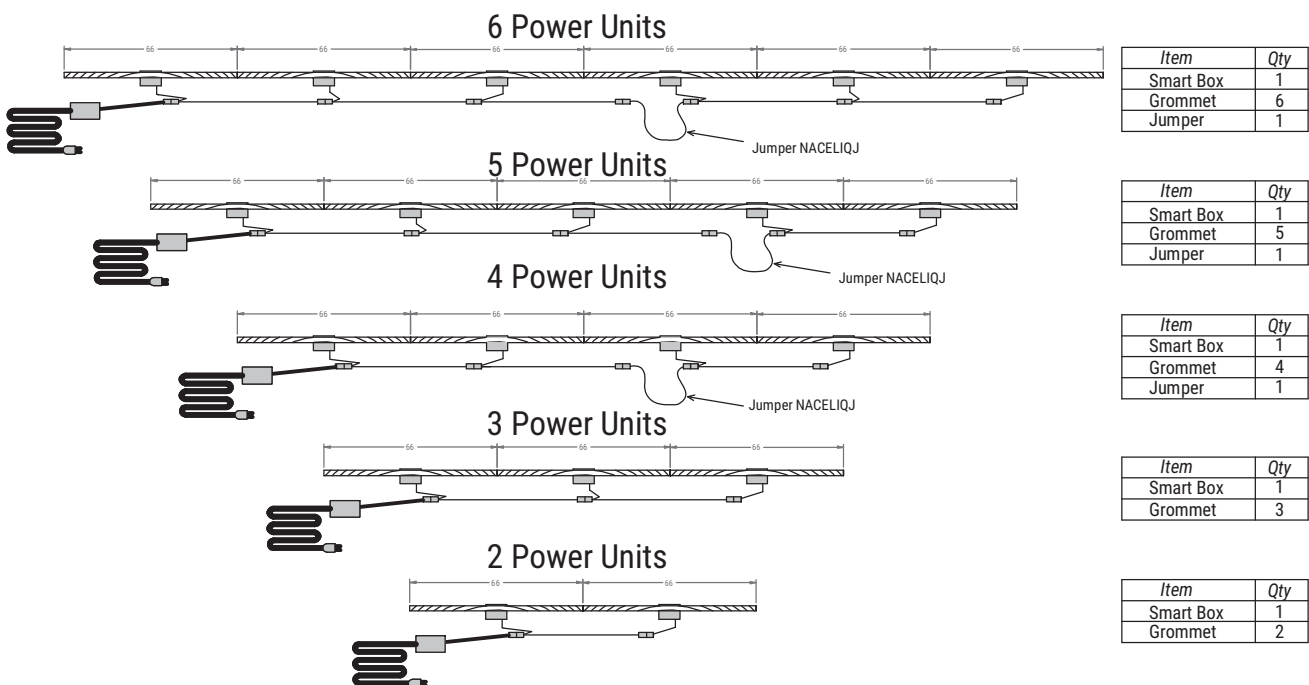
Configuration of IQ System for 66" WaveWorks Training Tables - Max of 6 IQ Units per run




Configuration of IQ System for 60" WaveWorks Training Tables - Max of 8 IQ Units per run




Item	Qty
Smart Box	1
Grommet	8




Item	Qty
Smart Box	1
Grommet	7




Item	Qty
Smart Box	1
Grommet	6




Item	Qty
Smart Box	1
Grommet	5



Item	Qty
Smart Box	1
Grommet	4



Item	Qty
Smart Box	1
Grommet	3



Item	Qty
Smart Box	1
Grommet	2

ACCESSORIES

TO ORDER, SPECIFY:


1. Model Number

SAMPLE MODEL NUMBER:


NACG23ELB

	MODEL NO./DESCRIPTION	LIST PRICE	DIMENSIONS					CARTONED WEIGHT	CUBIC FEET
			D	W	H	A	KW		
POWER GROMMET (G23)	NACG23ELB Black	\$ 663	2½	4½	3¼	—	—	2.3 lbs.	0.2
	NACG23ELS Silver	663	2½	4½	3¼	—	—	2.3 lbs.	0.2
	NACG23ELHCB Black/Hardwire	\$ 739	2½	4½	3¼	—	—	2.3 lbs.	0.2
	NACG23ELHCS Silver/Hardwire	739	2½	4½	3¼	—	—	2.3 lbs.	0.2


• Not intended for use on conference tables
 • Includes 2 power outlets and 2 power USB ports
 • Units are powder coated



DAISY LINK (G23)



Plugged Starter Unit



Hardwire Starter Unit

DAISY LINK STARTER UNITS

NACG23ELDLB1	Black - G23, Plugged	\$ 754	2½	4½	3¼	—	—	4.1 lbs.	0.4
NACG23ELDLS1	Silver - G23, Plugged	754	2½	4½	3¼	—	—	4.1 lbs.	0.4
NACG23ELDLHB1	Black - G23, Hardwire/Modular Connect	\$ 754	2½	4½	3¼	—	—	3.7 lbs.	0.4
NACG23ELDLHS1	Silver - G23, Hardwire/Modular Connect	754	2½	4½	3¼	—	—	3.7 lbs.	0.4

• Modular connect does not meet city code

DAISY LINK ADD-ON UNITS/JUMPER KIT

NACG23ELDLB2	Black - G23	\$ 792	2½	4½	3¼	—	—	2.3 lbs.	0.4
NACG23ELDLS2	Silver - G23	792	2½	4½	3¼	—	—	2.3 lbs.	0.4


• 60" jumper included with each daisy link add-on unit
 • Units are powder coated

DAISY LINK JUMPER (80", 180", AND 240")

NAC80ELDLJ	80" Daisy Chain Jumper	\$ 276	¾	80	2	—	—	2.4 lbs.	0.4
NAC180ELDLJ	180" Daisy Chain Jumper	419				—	—	lbs.	
NAC240ELDLJ	240" Daisy Chain Jumper	494				—	—	lbs.	

• 80" jumper is needed when connecting power between tables
 • Units are powder coated

NODE POWER GROMMET (G33)



NACG33ELB	Black	\$ 422	4	4	3½	—	—	1 lbs.	0.2
NACG33ELS	Silver	422	4	4	3½	—	—	1 lbs.	0.2
NACG33ELW	White	422	4	4	3½	—	—	1 lbs.	0.2

• For use with Maneuver gear, shield, and 120° tables when CUT-G33 option is specified

TO ORDER, SPECIFY:


1. Model Number

SAMPLE MODEL NUMBER:

NAC08ELPG3AXAB

	MODEL NO./DESCRIPTION		LIST PRICE	DIMENSIONS			A	KW	CARTONED WEIGHT	CUBIC FEET
				D	W	H				


AXIL M BLUE TOOTH SPEAKER



NAC08ELPG3AXAB	Black	\$ 1045					—	—	4.7 lbs.	0.31
NAC08ELPG3AXAS	Silver	1045					—	—	4.7 lbs.	0.31
NAC08ELPG3AXAW	White	1045					—	—	4.7 lbs.	0.31

- Freestanding unit
- 1 power outlet, 1 bluetooth speaker with push button pairing button, built in microphone, and 1 2.0 amp charging USB-A port, with stainless steel grille
- Black, 6 ft, 15 amp plugged power cord
- UL Listed


BURELÉ, POWER, CLAMP MOUNT



NAC07ELPG4BUAB	Black	\$ 441					—	—	1.25 lbs.	0.24
NAC07ELPG4BUAW	White	441					—	—	1.25 lbs.	0.24
NAC07ELPG4BUAG	Light Grey	441					—	—	1.25 lbs.	0.24

- Clamp mount unit
- 4 power outlets
- Black, 6 ft, 15 amp plugged cord with built in circuit breaker
- UL Listed

BURELÉ, POWER/USB, CLAMP MOUNT



NAC07ELPG4BUBB	Black	\$ 740					—	—	1.25 lbs.	0.24
NAC07ELPG4BUBW	White	740					—	—	1.25 lbs.	0.24
NAC07ELPG4BUBG	Light Grey	740					—	—	1.25 lbs.	0.24

- Clamp mount unit
- 2 power, 1 dual USB-A, 2.0 amp, 1 single USB-C -18 Watt
- Black, 6 ft 15 amp plugged power cord
- UL Listed


ACCESSORIES


TO ORDER, SPECIFY:


1. Model Number


SAMPLE MODEL NUMBER:


NAC04ELPG2DEAB


	MODEL NO./DESCRIPTION	LIST PRICE	DIMENSIONS			A	KW	CARTONED WEIGHT	CUBIC FEET
			D	W	H				
DEAN, 2 PORT, POWER, CLAMP MOUNT 	NAC04ELPG2DEAB Black	\$ 396				—	—	1.95 lbs.	0.24
	NAC04ELPG2DEAW White	396				—	—	1.95 lbs.	0.24
	NAC04ELPG2DEAG Light Grey	396				—	—	1.95 lbs.	0.24
	• Plastic face plate and end caps, clear anodized housing, and universal clamp mount • 2 power • Black, 6 ft, 15 amp plugged power cord • UL Listed								

DEAN, 2 PORT, POWER/USB, CLAMP MOUNT 	NAC04ELPG2DEBB Black	\$ 410				—	—	1.95 lbs.	0.24
	NAC04ELPG2DEBW White	410				—	—	1.95 lbs.	0.24
	NAC04ELPG2DEBG Light Grey	410				—	—	1.95 lbs.	0.24
	• Plastic face plate and end caps, clear anodized housing, and universal clamp mount • 1 power, 1 dual USB-A 2.0 amp • Black, 6 ft, 15 amp plugged power cord • UL Listed								

DEAN, 3 PORT, POWER, CLAMP MOUNT 	NAC06ELPG3DEAB Black	\$ 404				—	—	1.95 lbs.	0.24
	NAC06ELPG3DEAW White	404				—	—	1.95 lbs.	0.24
	NAC06ELPG3DEAG Light Grey	404				—	—	1.95 lbs.	0.24
	• Plastic face plate and end caps, clear anodized housing, and universal clamp mount • 3 power • Black, 6 ft, 15 amp plugged power cord • UL Listed								

DEAN, 3 PORT, POWER/USB, CLAMP MOUNT 	NAC06ELPG3DEBB Black	\$ 538				—	—	1.95 lbs.	0.24
	NAC06ELPG3DEBW White	538				—	—	1.95 lbs.	0.24
	NAC06ELPG3DEBG Light Grey	538				—	—	1.95 lbs.	0.24
	• Plastic face plate and end caps, clear anodized housing, and universal clamp mount • 2 power, 1 USB-A + C combo 18 watt, 2.0 amp; end receptacle rotated 90° • Black, 6 ft, 15 amp plugged power cord • UL Listed								

HITCH, BATTERY-POWERED 	NAC04ELPG4HTAB Black	\$ 711				—	—	1.7 lbs.	0.24
	NAC04ELPG4HTAW White	711				—	—	1.7 lbs.	0.24
	NAC04ELPG4HTAG Light Grey	711				—	—	1.7 lbs.	0.24
	• Freestanding and portable • 3 single USB-A, 2.0 amps, 1 LED battery indicator light • Black, 6 ft, 15 amp plugged power cord assembly for recharging. 5v, 4 amps • The unit is not UL Listed • The power pack is UL Listed • 11.6 amp hours, 20 watt power supply • Hitch models have a Lithium battery and MUST ship separately via Fed Ex Ground								





UNDERSURFACE POWER/DATA 	NAC03ELUPDC	\$ 381	3	3	1½	—	—	2 lbs.	0.3
	• Can be mounted to the underside of any surface • Contains 1 electrical outlet and 2 USB ports • Mounts under surface • 72" power cord included								

TO ORDER, SPECIFY:

1. Model Number

SAMPLE MODEL NUMBER:

NAC03ELPG2GAAW

	MODEL NO./DESCRIPTION		LIST PRICE	DIMENSIONS					CARTONED WEIGHT	CUBIC FEET
				D	W	H	A	KW		
GARCIA 	NAC03ELPG2GAAW	White	\$ 318	4	2¾	1½	—	—	1.27 lbs.	0.9
	NAC03ELPG2GAAB	Black	318	4	2¾	1½	—	—	1.27 lbs.	0.9
	NAC03ELPG2GAAG	Fog	318	4	2¾	1½	—	—	1.27 lbs.	0.9
	• 72" cord • Includes 2 USB-A									
	NAC03ELPG2GABW	White	\$ 421	4	2¾	1½	—	—	1.27 lbs.	0.9
	NAC03ELPG2GABB	Black	421	4	2¾	1½	—	—	1.27 lbs.	0.9
TULLY 	NAC06ELPG3TUAW	White	\$ 618	2¼	5%	12¾	—	—	3.05 lbs.	0.40
	NAC06ELPG3TUAB	Black	618	2¼	5%	12¾	—	—	3.05 lbs.	0.40
	NAC06ELPG3TUAG	Fog	618	2¼	5%	12¾	—	—	3.05 lbs.	0.40
	• 120" braided cord • Includes 2 USB-A, 1 USB-C and Power									
	NAC04ELPG2WLAW	Walnut with black braided cord	\$ 440	4	3¾	2¼	—	—	2.18 lbs.	0.17
	NAC04ELPG2WLAB	Black with black braided cord	440	4	3¾	2¼	—	—	2.18 lbs.	0.17
WILLOW 	NAC04ELPG2WLAE	Beech with Teal braided cord	440	4	3¾	2¼	—	—	2.18 lbs.	0.17
	• 108" cord • Includes 2 Power • Tamper resistant									
TRIPPEL 	NAC08ELPG3TRAW	White	\$ 436	3¾	7%	3¾	—	—	2 lbs.	0.13
	NAC08ELPG3TRAB	Black	436	3¾	7%	3¾	—	—	2 lbs.	0.13
	NAC08ELPG3TRAG	Fog	436	3¾	7%	3¾	—	—	2 lbs.	0.13
	• Set on surface unit • Included 2 USB-A and 2 power • Tamper resistant • Features Qi wireless charging									
POWER STRIP 	NAC0902EL6PS	Black	\$ 103	1%	9½	1%	—	—	lbs.	
	• 120" Cord • Includes 6 power									





ACCESSORIES

TO ORDER, SPECIFY:

1. Model Number

SAMPLE MODEL NUMBER:

NAC05ELPG2HRAC


	MODEL NO./DESCRIPTION	LIST PRICE	DIMENSIONS					CARTONED WEIGHT	CUBIC FEET
			D	W	H	A	KW		
HEARTH 	NAC05ELPG2HRAC	\$ 657	5 $\frac{3}{8}$	3 $\frac{1}{4}$	5 $\frac{3}{8}$	—	—	3 lbs.	0.31
	- Includes 1 power, 1 Dual USB-A 108" power cord - Handmolded concrete body with a wood base detail - Features a solid brass braided cord - UL Listed								
SIDEKICK 	NAC29ELPG2SKAG Heather Gray Felt	\$ 514	2 $\frac{3}{8}$	15	29 $\frac{1}{2}$	—	—	2 lbs.	0.59
	NAC29ELPG2SKAC Camel Felt	514	2 $\frac{3}{8}$	15	29 $\frac{1}{2}$	—	—	2 lbs.	0.59
	- Felt sofa arm overlay - Includes 1 power, 1 Dual USB-A, and felt pocket - Heather Gray unit features power and a braided cord in Poppy. Camel unit features a power and braided cord in Dusk 108" power cord - UL Listed								
APPARATUS 	NAC05ELPG2APAB Black	\$ 388	3 $\frac{3}{8}$	4 $\frac{13}{16}$	2	—	—	lbs.	
	NAC05ELPG2APAW White	388	3 $\frac{3}{8}$	4 $\frac{13}{16}$	2	—	—	lbs.	
	- Includes 1 power, 1 Dual USB-A 108" power cord - Black unit features a black braided cord and silver hardware. White unit features a white braided cord and silver hardware - ETL and UL Listed								
ASHLEY DUO 	NAC06ELPG3ADAB Black	\$ 455	3 $\frac{3}{8}$	5 $\frac{1}{2}$	1 $\frac{13}{16}$	—	—	lbs.	
	NAC06ELPG3ADAW White	455	3 $\frac{3}{8}$	5 $\frac{1}{2}$	1 $\frac{13}{16}$	—	—	lbs.	
	- Includes 2 power, 2 USB 72" power cord - Must have at least 5$\frac{1}{2}$" of clearance under surface at point of application to be able to mount - Clamp mount; Unit will fit on worksurface thicknesses $\frac{1}{2}$"-2$\frac{13}{16}$" - UL Listed								

TO ORDER, SPECIFY:

1. Model Number

SAMPLE MODEL NUMBER:

NAC120ELE4P

	MODEL NO./DESCRIPTION		LIST PRICE	
4- TRAC POWER ENTRY 	NAC120ELE4P	Plugged	\$ 396	
	NAC120ELE4H	Hardwire	266	
	NAC72ELE4NH	NYC Hardwire	486	



4- TRAC KIT	NACEL4KTC1	48"-60" Tables	\$ 268	
	NACEL4KTC2	72"-84" Tables	292	
	NACEL4KTC3	96"-108" Tables	396	
	NACEL4KTC4	120" Tables	486	
	NACEL4KTC5	144" Tables	620	
	NACEL4KTC6	168" Tables	635	
	NACEL4KTC7	192" Tables	666	
	NACEL4KTC8	216" Tables	694	
	NACEL4KTC9	240" Tables	845	

• See page 580 for details



4-TRAC ELECTRICAL

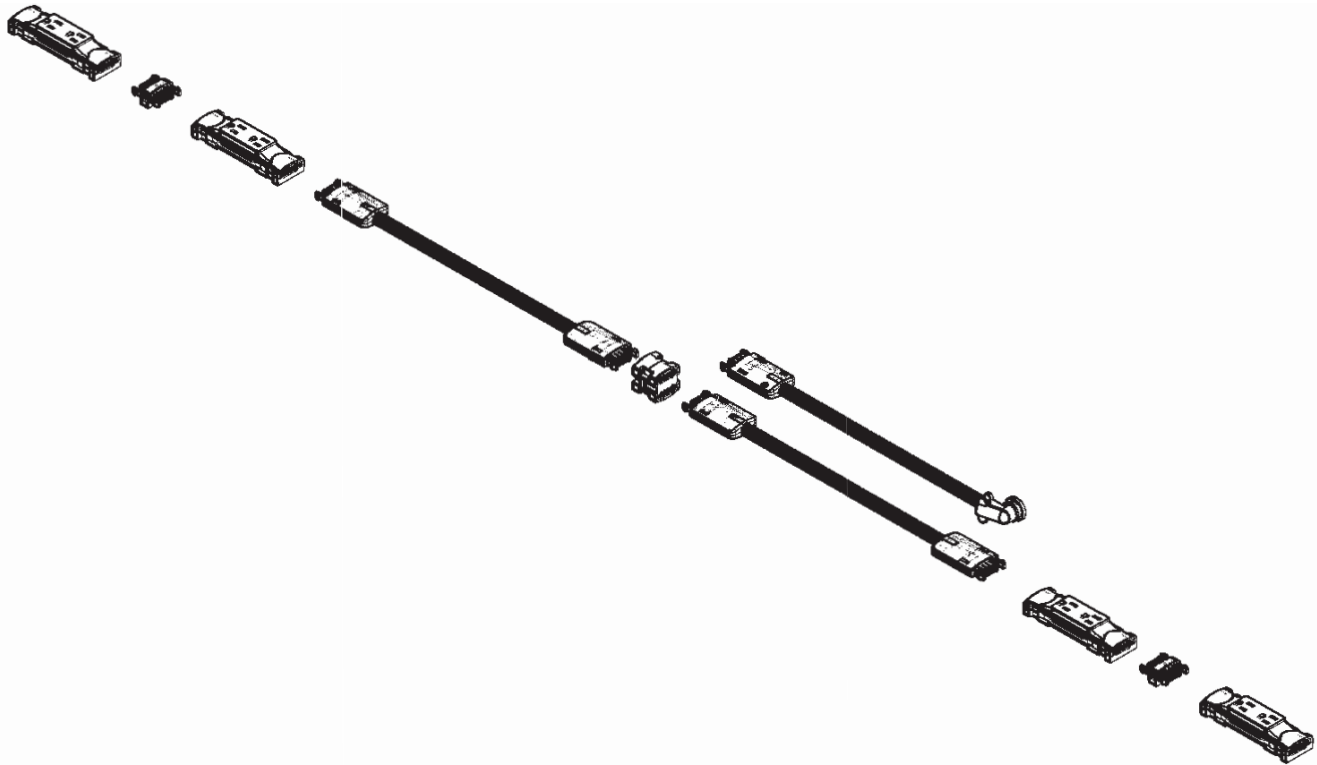


TABLE LENGTH	A DUPLEX	B DUPLEX	C DUPLEX	D DUPLEX
48"	n/a	16 $\frac{3}{16}$	31 $\frac{1}{16}$	n/a
60"	n/a	22 $\frac{3}{16}$	37 $\frac{1}{16}$	n/a
72"	n/a	24 $\frac{3}{16}$	47 $\frac{1}{16}$	n/a
84"	n/a	30 $\frac{3}{8}$	53 $\frac{1}{16}$	n/a
96"	30 $\frac{1}{16}$	36 $\frac{3}{8}$	59 $\frac{3}{4}$	n/a
108"	36 $\frac{1}{16}$	42 $\frac{3}{8}$	65 $\frac{3}{4}$	n/a
120"	38 $\frac{3}{16}$	44 $\frac{3}{8}$	75 $\frac{7}{16}$	n/a
144"	38 $\frac{3}{16}$	44 $\frac{3}{8}$	99 $\frac{7}{16}$	105 $\frac{1}{2}$
168"	44 $\frac{1}{4}$	50 $\frac{3}{16}$	117 $\frac{3}{8}$	123 $\frac{3}{16}$
192"	50 $\frac{1}{4}$	56 $\frac{3}{16}$	135 $\frac{3}{8}$	141 $\frac{1}{16}$
216"	50 $\frac{3}{16}$	56 $\frac{1}{4}$	159 $\frac{9}{16}$	165 $\frac{3}{8}$
240"	14 $\frac{5}{8}$	68 $\frac{1}{4}$	171 $\frac{1}{16}$	224 $\frac{1}{16}$

*Dimensions are in inches
See page 579 for pricing

TO ORDER, SPECIFY:

1. Model Number

SAMPLE MODEL NUMBER:

NAC0318WMV

	MODEL NO./DESCRIPTION		LIST PRICE	DIMENSIONS					CARTONED WEIGHT	CUBIC FEET
				D	W	H	A	KW		
VERTICAL WIRE MANAGER 	NAC0318WMV	Cinder	\$ 271	—	3	18	—	—	2 lbs.	0.1
	NAC0318WMVS	Platinum Metallic	271	—	3	18	—	—	2 lbs.	0.1
	NAC0318WMVN	Satin Nickel Metallic	271	—	3	18	—	—	2 lbs.	0.1
	• Applicable to all 2½" diameter C, T and X bases • Clamps to leg; no hardware required									
MESH WIRE MANAGER 	NAC0318WMM	Black	\$ 133	—	3	17½	—	—	2 lbs.	0.1
	• Applicable to all 2½" diameter C, T and X bases • Wraps around leg and is secured with Velcro®									
VERTICAL WIRE MANAGER 	NAC30WMV		\$ 303	1½	3¼	31	—	—	2 lbs.	0.2
	• Graphite color • Attaches to underside of worksurface; flexible; used to conceal power in-feed and data cables									
HORIZONTAL WIRE MANAGER 	NAC17WMH	Black Plastic	\$ 74	2½	17	4¼	—	—	3 lbs.	0.5
	NAC24WMH	Black Plastic	85	2½	24	4¼	—	—	3 lbs.	0.5
	• Attaches below worksurface; can be installed horizontally or vertically • Used to conceal power in-feed and data cables									

ACCESSORIES

TO ORDER, SPECIFY:

1. Model Number
2. Leather Color

SAMPLE MODEL NUMBER:

NAC06WMSTF 82008

MODEL NO./DESCRIPTION	LIST PRICE	DIMENSIONS					CARTONED WEIGHT	CUBIC FEET
		D	W	H	A	KW		

WIRE MANAGEMENT
LEATHER STRAP

NAC06WMSTF

\$ 85

1¼

6

5 lbs.

0.5

- Available in grade L8 Florence only 82002 Florence Almond Biscotti, 82006 Florence Terra, 82008 Florence Mezza Luna, and 82009 Florence Struzzo
- Sold in a quantity of 1

WIRE MANAGEMENT
LEATHER SLEEVE

NAC28WMSLF

For Worksurface Height

\$ 202

28

NAC34WMSLF

For Counter Height

216

34

NAC40WMSLF

For Bar Height

230

40


- Available in grade L8 Florence only 82002 Florence Almond Biscotti, 82006 Florence Terra, 82008 Florence Mezza Luna, and 82009 Florence Struzzo
- Sold in quantity of 1


TO ORDER, SPECIFY:

- 1. Model Number
- 2. Resin Grade/Color
- 3. Metal Color (holder)

SAMPLE MODEL NUMBER:

NAC7232PVMCP 1 1677 462
• See page 441 for textiles

	MODEL NO./DESCRIPTION	LIST PRICE	DIMENSIONS					CARTONED WEIGHT	CUBIC FEET
			D	W	H	A	KW		
EDGE MOUNTED PRIVACY/MODESTY SCREEN RECTANGULAR, RESIN 		GRADE 1							
	NAC7232PVMCP	\$ 1166	3/16	72	32	—	—	46 lbs.	6.0
	NAC6632PVMCP	1163	3/16	66	32	—	—	34 lbs.	5.5
	NAC6032PVMCP	794	3/16	60	32	—	—	32 lbs.	5.1
	NAC5432PVMCP	790	3/16	54	32	—	—	30 lbs.	4.6
	NAC4832PVMCP	760	3/16	48	32	—	—	28 lbs.	4.1
	NAC4232PVMCP	693	3/16	42	32	—	—	26 lbs.	3.7
	NAC3632PVMCP	663	3/16	36	32	—	—	24 lbs.	3.2
	NAC3032PVMCP	503	3/16	30	32	—	—	22 lbs.	2.8
	NAC2732PVMCP	486	3/16	27	32	—	—	22 lbs.	2.5
	NAC2432PVMCP	452	3/16	24	32	—	—	20 lbs.	2.3
	NAC2132PVMCP	439	3/16	21	32	—	—	18 lbs.	2.1



- Specify resin grade and color: Grade 1 Frosted (1677)
- Specify metal color for holders: Concrete (423), Cinder (462), Iron (463), Platinum Metallic (501), or Satin Nickel Metallic (503)
- Privacy screens are 3/16" thick dual sided resin; the overall assembly thickness, including the holders, is 1 1/2"
- Privacy screen holders are made of 12-gauge steel
- Privacy screens are not intended to be stand alone units
- For use on 1 3/8" and 1 1/2" surfaces with a softened or profiled rim. Not to be used with knife edge rims
- Screen extends 18" above the surface and 12" below the surface

ACCESSORIES

TO ORDER, SPECIFY:

1. Model Number
2. Textile Grade/Color
3. Metal Color (holder)

SAMPLE MODEL NUMBER:

NAC7232PVMC2PFA A 8600 423

- See page 441 for textiles

MODEL NO./DESCRIPTION			LIST PRICE	DIMENSIONS					CARTONED WEIGHT	CUBIC FEET
	GRADE A	GRADE B/COM		D	W	H	A	KW		
EDGE MOUNTED PRIVACY/MODESTY SCREEN RECTANGULAR, TEXTILE	NAC7232PVMC2PFA	\$ 1609	\$ 1796	1 $\frac{1}{16}$ "	72	32	—	—	46 lbs.	6.0
	NAC6632PVMC2PFA	1511	1687	1 $\frac{1}{16}$ "	66	32	—	—	34 lbs.	5.5
	NAC6032PVMC2PFA	1401	1559	1 $\frac{1}{16}$ "	60	32	—	—	32 lbs.	5.1
	NAC5432PVMC2PFA	1308	1451	1 $\frac{1}{16}$ "	54	32	—	—	30 lbs.	4.6
	NAC4832PVMC2PFA	1207	1339	1 $\frac{1}{16}$ "	48	32	—	—	28 lbs.	4.1
	NAC4232PVMC2PFA	1114	1228	1 $\frac{1}{16}$ "	42	32	—	—	26 lbs.	3.7
	NAC3632PVMC2PFA	997	1096	1 $\frac{1}{16}$ "	36	32	—	—	24 lbs.	3.2
	NAC3032PVMC2PFA	904	992	1 $\frac{1}{16}$ "	30	32	—	—	22 lbs.	2.8
	NAC2732PVMC2PFA	854	931	1 $\frac{1}{16}$ "	27	32	—	—	22 lbs.	2.5
	NAC2432PVMC2PFA	754	831	1 $\frac{1}{16}$ "	24	32	—	—	20 lbs.	2.3
	NAC2132PVMC2PFA	719	785	1 $\frac{1}{16}$ "	21	32	—	—	18 lbs.	2.1

- Privacy screens are 1 $\frac{1}{16}$ " thick dual sided textile; the overall assembly thickness
- Privacy screen holders are made of 12-gauge steel
- Privacy screens are not intended to be stand alone units
- Specify tack textile grade and color
- Specify metal color for holders: Concrete (423), Cinder (462), Iron (463), Platinum Metallic (501), or Satin Nickel Metallic (503)
- For use on 1 $\frac{1}{16}$ " and 1 $\frac{1}{8}$ " surfaces with a softened or profiled rim. Not to be used with knife edge rims
- Textile will be railroaded
- Screen extends 18" above the surface and 12" below the surface

EDGE MOUNTED
PRIVACY SCREEN
RECTANGULAR, RESIN

	GRADE 1							
NAC7224PVCP	\$ 664	3 $\frac{1}{16}$ "	71 $\frac{1}{16}$ "	24	—	—	24 lbs.	4.7
NAC6624PVCP	661	3 $\frac{1}{16}$ "	65 $\frac{1}{16}$ "	24	—	—	22 lbs.	4.3
NAC6024PVCP	484	3 $\frac{1}{16}$ "	59 $\frac{1}{16}$ "	24	—	—	19 lbs.	4.0
NAC5424PVCP	474	3 $\frac{1}{16}$ "	53 $\frac{1}{16}$ "	24	—	—	17 lbs.	3.6
NAC4824PVCP	416	3 $\frac{1}{16}$ "	47 $\frac{7}{8}$ "	24	—	—	16 lbs.	3.3
NAC4224PVCP	441	3 $\frac{1}{16}$ "	41 $\frac{1}{2}$ "	24	—	—	14 lbs.	2.9
NAC3624PVCP	339	3 $\frac{1}{16}$ "	35 $\frac{7}{8}$ "	24	—	—	12 lbs.	2.5
NAC3024PVCP	319	3 $\frac{1}{16}$ "	29 $\frac{1}{2}$ "	24	—	—	10 lbs.	2.2
NAC2724PVCP	315	3 $\frac{1}{16}$ "	27	24	—	—	9 lbs.	2.0
NAC2424PVCP	287	3 $\frac{1}{16}$ "	23 $\frac{1}{2}$ "	24	—	—	8 lbs.	1.8
NAC2124PVCP	284	3 $\frac{1}{16}$ "	21	24	—	—	7 lbs.	1.6

- Specify resin grade and color: Grade 1 Frosted (1677)
- Specify metal color for holders: Concrete (423), Cinder (462), Iron (463), Platinum Metallic (501), or Satin Nickel Metallic (503)
- Privacy screens are 3 $\frac{1}{16}$ " thick dual sided resin; the overall assembly thickness, including the holders, is 1 $\frac{1}{8}$ "
- Privacy screen holders are made of 12-gauge steel
- Privacy screens are not intended to be stand alone units
- For use on 1 $\frac{1}{16}$ " and 1 $\frac{1}{8}$ " surfaces with a softened or profiled rim. Not to be used with knife edge rims
- Screen extends 18" above the surface and 4" below the surface

TO ORDER, SPECIFY:


1. Model Number
2. Resin Grade/Color
3. Metal Color (holder)

SAMPLE MODEL NUMBERS:

NAC7224PVCTP 1 1677 462
 NAC7224PVC2PFA A 8600 423

- See page 441 for textiles

MODEL NO./DESCRIPTION	LIST PRICE	DIMENSIONS			A	KW	CARTONED WEIGHT	CUBIC FEET
		D	W	H				
EDGE MOUNTED PRIVACY SCREEN TAPERED, RESIN	GRADE 1							
	NAC7224PVCTP	\$ 1152	3/16	71 13/16	24	—	—	24 lbs. 4.7
	NAC6624PVCTP	1097	3/16	65 13/16	24	—	—	22 lbs. 4.3
	NAC6024PVCTP	1040	3/16	59 13/16	24	—	—	19 lbs. 4.0
	NAC5424PVCTP	983	3/16	53 13/16	24	—	—	17 lbs. 3.6
	NAC4824PVCTP	930	3/16	47 7/8	24	—	—	16 lbs. 3.3
	NAC4224PVCTP	871	3/16	41 7/8	24	—	—	14 lbs. 2.9
	NAC3624PVCTP	813	3/16	35 7/8	24	—	—	12 lbs. 2.5
	NAC3024PVCTP	754	3/16	29 13/16	24	—	—	10 lbs. 2.2
	NAC2724PVCTP	726	3/16	27	24	—	—	9 lbs. 2.0
	NAC2424PVCTP	696	3/16	23 13/16	24	—	—	8 lbs. 1.8
	NAC2124PVCTP	669	3/16	21	24	—	—	7 lbs. 1.6
• Specify resin grade and color: Grade 1 Frosted (1677) • Specify metal color for holders: Concrete (423), Cinder (462), Iron (463), Platinum Metallic (501), or Satin Nickel Metallic (503) • Privacy screens are 3/16" thick dual sided resin; the overall assembly thickness, including the holders, is 1 3/8" • Privacy screen holders are made of 12-gauge steel • Privacy screens are not intended to be stand alone units • For use on 1 3/8" and 1 1/2" surfaces with a softened or profiled rim. Not to be used with knife edge rims • Screen extends 18" above the surface and 4" below the surface								

**EDGE MOUNTED
PRIVACY SCREEN
RECTANGULAR, TEXTILE**


	GRADE A		GRADE B/ COM					
					D	W	H	
NAC7224PVC2PFA	\$ 1148	\$ 1247	1 1/8	71 13/16	24	—	—	24 lbs. 4.7
NAC6624PVC2PFA	1089	1177	1 1/8	65 13/16	24	—	—	22 lbs. 4.3
NAC6024PVC2PFA	1030	1118	1 1/8	59 13/16	24	—	—	19 lbs. 4.0
NAC5424PVC2PFA	963	1040	1 1/8	53 13/16	24	—	—	17 lbs. 3.6
NAC4824PVC2PFA	900	966	1 1/8	47 7/8	24	—	—	16 lbs. 3.3
NAC4224PVC2PFA	843	909	1 1/8	41 7/8	24	—	—	14 lbs. 2.9
NAC3624PVC2PFA	756	811	1 1/8	35 7/8	24	—	—	12 lbs. 2.5
NAC3024PVC2PFA	697	741	1 1/8	29 13/16	24	—	—	10 lbs. 2.2
NAC2724PVC2PFA	663	707	1 1/8	27	24	—	—	9 lbs. 2.0
NAC2424PVC2PFA	626	670	1 1/8	23 13/16	24	—	—	8 lbs. 1.8
NAC2124PVC2PFA	590	623	1 1/8	21	24	—	—	7 lbs. 1.6
• Privacy screens are 1 1/8" thick dual sided textile • Privacy screen holders are made of 12-gauge steel • Privacy screens are not intended to be stand alone units • Specify tack textile grade and color • Specify metal color for holders: Concrete (423), Cinder (462), Iron (463), Platinum Metallic (501), or Satin Nickel Metallic (503) • For use on 1 3/8" and 1 1/2" surfaces with a softened or profiled rim. Not to be used with knife edge rims • Textile will be railroaded • Screen extends 18" above the surface and 4" below the surface								





ACCESSORIES

TO ORDER, SPECIFY:

1. Model Number
2. Shelf Color
3. Laminate Color

SAMPLE MODEL NUMBER:

10N1867FDSHL PB PB
NAC1205WGV1

	MODEL NO./DESCRIPTION		LIST PRICE	DIMENSIONS			A	KW	CARTONED WEIGHT	CUBIC FEET
	D	W	H							
FREESTANDING KIOSK	10N1867FDSHL	Laminate	\$ 1382	13 ¹ / ₁₆	17 ¹ / ₁₆	66 ³ / ₁₆	—	—	73 lbs.	19.7
	• Can be used to hang additional PPE equipment (ie. Glove holders and sanitizer dispensers) Limit of 10 lbs hung on the back									
SINGLE WIRE GLOVE BOX	NAC1205WGV1	Steel	\$ 117	3 ¹ / ₁₆	11 ¹ / ₁₆	4 ³ / ₁₆	—	—	1 lbs.	1.38
	• Steel wire Glove box is Chrome in color • Includes pre-drilled mounting holes and hardware • Holds 1 std size box of gloves									
DOUBLE WIRE GLOVE BOX	NAC1210WGV2	Steel	\$ 160	3 ¹ / ₁₆	11 ¹ / ₁₆	9 ¹ / ₂	—	—	1 lbs.	2.7
	• Steel wire Glove box is Chrome in color • Includes pre-drilled mounting holes and hardware • Holds 2 std size boxes of gloves									
QUAD WIRE GLOVE BOX	NAC1219WGV4	Steel	\$ 229	3 ¹ / ₁₆	11 ¹ / ₁₆	19	—	—	1 lbs.	5.2
	• Steel wire Glove box is Chrome in color • Includes pre-drilled mounting holes and hardware • Holds 4 std size boxes of gloves									
AUTOMATIC HAND SANITIZER DISPENSER	NAC0407USD1		\$ 794	4 ³ / ₁₆	6	11	—	—	2.2 lbs.	8.1
	• Dispenser accepts most bulk liquid soaps and sanitizers up to 12mL capacity, inside a solid case of durable ABS plastic • 4 C Batteries sold separately. External On-Off switch • Tamper resistant lock system with key for convenient access for assigned personnel • Motion Dispenser: Dispenses within a sense detection of 3"-5" • 2.2 lbs Empty (without fluid)									



Shaded model numbers are available on our "To You in 10 Days or Less" Quick Delivery program and will be delivered in 10 days or less.

TO ORDER, SPECIFY:

1. Model Number
2. Resin Grade/Color
3. Paint Color

SAMPLE MODEL NUMBERS:

NAC6012MPA 1 1677 462
NACGBT2

- See page 441 for textiles

	MODEL NO./DESCRIPTION	LIST PRICE		DIMENSIONS				CARTONED WEIGHT	CUBIC FEET	
				D	W	H	A			KW
 RECTANGULAR MODESTY PANEL ½ HEIGHT RESIN		GRADE 1								
	NAC6012MPA	\$	902	⅜	59⅞	12⅝	—	—	5 lbs.	3.9
	NAC5412MPA		811	⅜	53⅞	12⅝	—	—	5 lbs.	3.8
	NAC4812MPA		719	⅜	47⅞	12⅝	—	—	4 lbs.	3.7
	NAC4212MPA		631	⅜	41¾	12⅝	—	—	4 lbs.	3.7
	NAC3612MPA		540	⅜	35¾	12⅝	—	—	4 lbs.	3.7
	NAC3012MPA		452	⅜	29¾	12⅝	—	—	3 lbs.	3.6
	NAC2412MPA		361	⅜	23⅞	12⅝	—	—	3 lbs.	3.6

- Specify resin grade and color: Grade 1 Frosted (1677)
- Resin modesty can be used with Epic and WaveWorks worksurfaces and flip/nest tables
- Double sided ⅝" resin
- Modesty has stiffener rail which comes with brackets that attach to the underside of the worksurface
- 72" flip/nest training table requires 60" modesty, 60" table requires 48" modesty, and 48" table requires 36" modesty


TAPERED MODESTY PANEL
½ HEIGHT RESIN



		GRADE 1						
NAC6012MPTA	\$ 902	⅝	59⅞	12⅝	—	—	5 lbs.	3.9
NAC5412MPTA	811	⅝	53⅞	12⅝	—	—	5 lbs.	3.8
NAC4812MPTA	719	⅝	47⅞	12⅝	—	—	4 lbs.	3.7
NAC4212MPTA	631	⅝	41¾	12⅝	—	—	4 lbs.	3.7
NAC3612MPTA	540	⅝	35¾	12⅝	—	—	4 lbs.	3.7
NAC3012MPTA	452	⅝	29¾	12⅝	—	—	3 lbs.	3.6
NAC2412MPTA	361	⅝	23⅞	12⅝	—	—	3 lbs.	3.6

- Specify resin grade and color: Grade 1 Frosted (1677)
- Resin modesty can be used with Epic and WaveWorks worksurfaces and flip/nest tables
- Double sided ⅝" resin
- Modesty has stiffener rail which comes with brackets that attach to the underside of the worksurface
- 72" flip/nest training table requires 60" modesty, 60" table requires 48" modesty, and 48" table requires 36" modesty

RECTANGULAR MODESTY PANEL
½ HEIGHT METAL



NAC6012MP2M	\$ 902	⅝	59⅞	12⅝	—	—	10 lbs.	3.9
NAC5412MP2M	811	⅝	53⅞	12⅝	—	—	10 lbs.	3.8
NAC4812MP2M	719	⅝	47⅞	12⅝	—	—	8 lbs.	3.7
NAC4212MP2M	631	⅝	41¾	12⅝	—	—	8 lbs.	3.7
NAC3612MP2M	540	⅝	35¾	12⅝	—	—	8 lbs.	3.7
NAC3012MP2M	452	⅝	29¾	12⅝	—	—	6 lbs.	3.6
NAC2412MP2M	361	⅝	23⅞	12⅝	—	—	6 lbs.	3.6

- Specify Style E for embossed design
- Specify metal color: 423 Concrete, 462 Cinder, 463 Iron, 501 Platinum Metallic, 503 Satin Nickel Metallic and 405 Designer White
- Metal modesty can be used with Epic and WaveWorks worksurfaces and flip/nest tables
- Modesty comes with brackets that attach to the underside of the worksurface
- Metal modesty has raised square embossed design (the raised design appears on the approach side of the modesty)
- Metal modesty is 16-gauge steel
- 72" flip/nest training table requires 60" modesty, 60" table requires 48" modesty, and 48" table requires 36" modesty

GANGING BRACKET



NACGBT2	Table Ganging Bracket Kit	\$ 117	—	—	—	—	—	1 lbs.	0.1
---------	---------------------------	--------	---	---	---	---	---	--------	-----

- Quantity of 6 (set of 3 pairs) hook and loop "dog bone" shaped brackets
- All hardware included
- Available in black only
- Specify model number only

ACCESSORIES
