

OFFICE OF
STATE AID ROAD CONSTRUCTION
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
P.O. BOX 1850
JACKSON, MISSISSIPPI 39215-1850

H. Carey Webb, P.E.
State Aid Engineer
Telephone (601)359-7150
www.msstateaidroads.us


412 Woodrow Wilson Avenue
Jackson, Mississippi 39216
Fax (601)359-7141
mail@osarc.state.ms.us

September 25, 2015

Board of Supervisors
Attala County
c/o Chancery Clerk
Kosciusko, MS 39090

Gentlemen:

RE: **FEDERAL AID BRIDGE REPLACEMENT**
PROJECT NO. BR-0004(20)B
ATTALA COUNTY

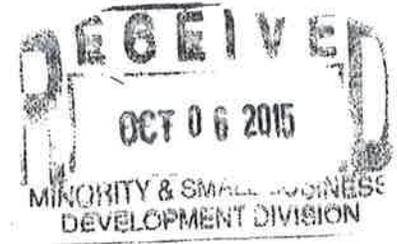

The Plans and specifications for the above numbered project have been reviewed and are herewith approved. You are, therefore, authorized to advertise this project for bids. The work to be done under this project consists of **Replacement of Bridges and Approaches**.

The date for opening these bids has been set for **Monday, November 2, 2015 at 9:00 a. m.** in the **Supervisor's Board Room at Kosciusko**.

In accordance with the Provisions of Section 31-7-13, Mississippi Code of 1972 as amended by House Bills numbered 901 and 1306 of the 1991 regular Legislative Session, the advertisement for receipt of bids on this project must be made once each week for two (2) consecutive weeks in a regular newspaper published in your county and, further, that the date as published for the bid opening shall not be less than fifteen (15) working days after the last published notice. The date, as set above, should be no sooner than the sixteenth working day after the last advertisement appears in the newspaper.

We are returning herewith an approved copy of the Plans and Proposal Documents to be filed by your Clerk when advertisement is begun.

Sincerely,

H. Carey Webb P. E.
State Aid Engineer

Polly Robinson

By: Polly Robinson
Administrative Assistant

pc: J. Christian Gardner, P.E., Co. Eng./Project Eng.
Supervisor District(s) 3
Jack Jackson, P.E.
F.H.W.A. , 00-01 (*if Federal*)
System Consultants Associates
McGraw Hill Construction Dodge
MS Procurement Technical Assistance Program
Associated General Contractors of Mississippi, Inc.
M.R.B.A.
Project File

SCANNED

Per: ag

Date: 10/6/15

OFFICE OF STATE AID ROAD CONSTRUCTION
MISSISSIPPI DEPARTMENT OF TRANSPORTATION
AND
ATTALA COUNTY BOARD OF SUPERVISORS



SECTION 900

NOTICE TO CONTRACTORS:

Sealed bids will be received by the Board of Supervisors of Attala County, Mississippi at the Attala County Chancery Clerk Building, Kosciusko, Mississippi, until _____ on the _____ day of _____, and shortly thereafter publicly opened for the construction of 0.330 miles of REPLACE BRIDGES AND APPROACHES on the ATTALA ROAD 3024 (STUART- SMITH ROAD) being known as Project No. BR-0004(20)B in Attala County, Mississippi.

PRINCIPAL ITEMS OF WORK ARE APPROXIMATELY AS FOLLOWS:

ITEM	QUANTITY	UNIT
<u>ROADWAY ITEMS:</u>		
MOBILIZATION	LUMP SUM	LS
CLEARING AND GRUBBING	LUMP SUM	LS
REMOVAL OF BRIDGE @ STA. 90+19.25	1.000	UN
REMOVAL OF BRIDGE @ STA. 98+05.75	1.000	UN
REMOVAL OF EXISTING ASPHALT PAVEMENT (ALL DEPTHS)	3,414.000	SY
UNCLASSIFIED EXCAVATION (FM)	2,441.000	CY
BORROW EXCAVATION (F.M.E.) (CONTRACTOR FURNISHED) (CLASS 9)	2,523.000	CY
CRUSHED STONE	4,356.000	TON
MIXING, SHAPING AND COMPACTION	4,039.000	SY
HOT MIX ASPHALT, (ST) (9.5 MM)	616.000	TON
ASPHALT FOR PRIME COAT (EA-1)	1,617.000	GAL
24" ALUMINUM COATED CORRUGATED METAL PIPE, 12 GAGE, 2 2/3" X 1/2" CORRUGATION	100.000	LF
24" ALUMINUM COATED CORRUGATED METAL END SECTION, 12 GAGE	4.000	EA
GUARD RAIL, "W" BEAM	350.000	LF
GUARD RAIL, BRIDGE END SECTION, TYPE "I" THRIE BEAM	8.000	EA
GUARD RAIL, TERMINAL END SECTION	8.000	EA
RIGHT-OF-WAY MARKERS (TYPE I)	16.000	EA
MAINTENANCE OF TRAFFIC	LUMP SUM	LS
ADDITIONAL CONSTRUCTION SIGNS	0.000	SF
4" WIDE THERMOPLASTIC EDGE STRIPE (CONTINUOUS WHITE) (60 MILS)	0.663	MI
4" WIDE THERMOPLASTIC TRAFFIC STRIPE (SKIP YELLOW) (90 MILS)	0.265	MI
4" WIDE THERMOPLASTIC TRAFFIC STRIPE (CONTINUOUS YELLOW)	0.398	MI

SECTION 900
 PROJECT NO. BR-0004(20)B
 ATTALA COUNTY

(90 MILS)

TWO-WAY YELLOW REFLECTIVE HIGH PERFORMANCE RAISED MARKERS	30.000	EA
REFLECTORIZED TRAFFIC OBJECT MARKER (ENCAPSULATED LENS) (TYPE 3)	8.000	EA

EROSION CONTROL ITEMS:

AGRICULTURAL LIMESTONE	8.180	TON
COMMERCIAL FERTILIZER (13:13:13)	1.840	TON
AMMONIUM NITRATE	0.410	TON
SEEDING	6.140	AC
VEGETATIVE MATERIALS FOR MULCH	18.410	TON
EXCELSIOR BLANKET	300.000	SY
TEMPORARY SILT FENCE (TYPE II) (AOS 0.15 - 0.84)	3,690.000	LF
LOOSE RIPRAP, 200 LB.	100.000	TON
GEOTEXTILE UNDER RIPRAP, TYPE V, AOS 0.21 - 0.43	210.000	SY
WATTLES, 20"	300.000	LF

BRIDGE A ITEMS:

TEST PILE	2.000	EA
CONVENTIONAL STATIC PILE LOAD TEST	0.000	EA
14" PRESTRESSED CONCRETE PILING	1,200.000	LF
31' PRECAST CONCRETE SLAB UNIT, 3.5' INTERIOR, 30 DEG SKEW, LT FWD	24.000	EA
40' PRECAST CONCRETE SLAB UNIT, 3.5' INTERIOR, 30 DEG SKEW, LT FWD	6.000	EA
31' PRECAST CONCRETE SLAB UNIT, 3.5' EXTERIOR, 30 DEG SKEW, LT FWD	8.000	EA
40' PRECAST CONCRETE SLAB UNIT, 3.5' EXTERIOR, 30 DEG SKEW, LT FWD	2.000	EA
PRECAST CONCRETE BARRIER RAIL	328.000	LF
36.0' PRECAST CONCRETE CAP, INTERMEDIATE UNIT, CONCRETE PILE, 30 DEG SKEW, LT FWD.	2.000	EA
36.17' PRECAST CONCRETE CAP, INTERMEDIATE UNIT, CONCRETE PILE, 30 DEG SKEW, LT FWD.	2.000	EA
36.0' PRECAST CONCRETE CAP, END UNIT, CONCRETE PILE, 30 DEG SKEW, LT FWD.	2.000	EA
11.33' PRECAST CONCRETE WING	4.000	EA
LOOSE RIPRAP, 300 LB.	155.000	TON

SECTION 900
 PROJECT NO. BR-0004(20)B
 ATTALA COUNTY

GEOTEXTILE UNDER RIPRAP, TYPE V, AOS 0.21 - 0.43	330.000	SY
---	---------	----

BRIDGE B ITEMS:

TEST PILE	2.000	EA
CONVENTIONAL STATIC PILE LOAD TEST	0.000	EA
14" PRESTRESSED CONCRETE PILING	1,200.000	LF
19' PRECAST CONCRETE SLAB UNIT, 3.5' INTERIOR	12.000	EA
31' PRECAST CONCRETE SLAB UNIT, 3.5' INTERIOR	12.000	EA
40' PRECAST CONCRETE SLAB UNIT, 3.5' INTERIOR	6.000	EA
19' PRECAST CONCRETE SLAB UNIT, 3.5' EXTERIOR	4.000	EA
31' PRECAST CONCRETE SLAB UNIT, 3.5' EXTERIOR	4.000	EA
40' PRECAST CONCRETE SLAB UNIT, 3.5' EXTERIOR	2.000	EA
PRECAST CONCRETE BARRIER RAIL	280.000	LF
31.0' PRECAST CONCRETE CAP, INTERMEDIATE UNIT, CONCRETE PILE	2.000	EA
31.33' PRECAST CONCRETE CAP, INTERMEDIATE UNIT, CONCRETE PILE	2.000	EA
31.0' PRECAST CONCRETE CAP, END UNIT, CONCRETE PILE,	2.000	EA
9.25' PRECAST CONCRETE WING	4.000	EA
LOOSE RIPRAP, 300 LB.	145.000	TON
GEOTEXTILE UNDER RIPRAP, TYPE V, AOS 0.21 - 0.43	305.000	SY

NOTICE TO CONTRACTORS:

CONTRACT TIME: 120 Working Days

BASIS OF AWARD

The award, if made, will be made to the lowest qualified bidder on the basis of published quantities.

The attention of the BIDDER is directed to the State and Federal laws governing selection of and employment of labor.

MINIMUM WAGE RATES for this project have been predetermined by the Secretary of the the Department of Labor in accordance with the requirements of Federal regulations governing the expenditure of FEDERAL AID HIGHWAY FUNDS and are set out in the labor regulations contained in the proposal.

The Board of Supervisors hereby notifies all bidders that it will affirmatively insure that in any contract entered into pursuant to this advertisement, minority business enterprise will be afforded full opportunity to submit bids in response to this invitation and will not be discriminated against on the grounds of race, color, or national origin in consideration for an award.

PLANS AND SPECIFICATIONS are on file in the Office of the Chancery Clerk of Attala County, the County Engineer's office and the Office of the State Aid Engineer, 412 E. Woodrow Wilson Avenue, Jackson, Mississippi. This project shall be constructed in accordance with the latest edition of the Mississippi Standard Specifications for State Aid Road and Bridge Construction.

PLANS AND PROPOSALS may be secured from J. Christian Gardner, County Engineer for Attala County, Mississippi, P. O. Drawer 1197, Kosciusko. The Cost is fifty dollars (\$50.00) for plans and fifty dollars (\$50.00) for the proposal, non-refundable

Certified check or bid bond for five percent (5%) of the total bid, made payable to Attala County and the State of Mississippi must accompany each proposal.

Bidders are hereby notified that any proposal accompanied by letters qualifying in any manner the condition under which the proposal is tendered will be considered an irregular bid and such proposal will not be considered in making the award.

Eddie Womble, President
Attala County Board of Supervisors