



➤ See page

<b>Statement of Line</b>	20
Panels	20
Connectors and Trim	21
Power and Data	22
<b>Planning</b>	23
Features Overview	23
Product Information	24
Application Guidelines	36
<b>Power &amp; Data Planning</b>	38
Overview	38
Product Information	39
Standard 8-Wire System	42
Enhanced 10-Wire System	43
Cable Management	44
<b>Pricing &amp; Specifying</b>	47
Panels	47
Connectors and Trim	71
Power and Data	102




**Tackable Acoustical Panels**

- See page 24 for product info.
- See pages 47–50 to specify.




**Combination Panels**

- See page 24 for product info.
- See pages 51–53 to specify.




**Mid-Wireway Panels**

- See page 25 for product info.
- See pages 54–55 to specify.



**Ceiling Power Entry Panels**

- See page 26 for product info.
- See page 56 to specify.




**Glass Panels**

- See page 27 for product info.
- See page 57 to specify full glass panels.
- See page 58 to specify partial glass panels.



**Sectional Panel Frames**

- See page 28 for product info.
- See pages 59–61 to specify.



**Sectional Panel Tiles**

- See page 28 for product info.
- See pages 62–63 to specify.



**Stackable Acoustical Panels and Combination Panels**

- See page 29 for product info.
- See page 64 to specify.




**Stackable Glass Panels**

- See page 29 for product info.
- See page 65 to specify.



**Stackable Ceiling Power Entry Panels**

- See page 29 for product info.
- See page 66 to specify.




**Frameless Glass**

- See page 30 for product info.
- See page 67 to specify.




**Floor-to-Ceiling Components**

- See page 68 to specify.



**Privacy Panels**

- See page 31 for product info.
- See page 69 to specify.




**Hinged Doors**

- See page 32 for product info.
- See page 70 to specify.




**Panel-Mount Tackboards and Markerboards**

- See page 110 to specify.




## End Trim

- See page 35 for product info.
- Standard, see page 71 to specify.
- Stackable, see page 78 to specify.




## X Connector (4-way)

- See page 33 for product info.
- Standard, see page 71 to specify.
- Mid-wireway, see page 77 to specify.
- Stackable, see page 80 to specify.




## L Connector (90°)

- Available in softened and square profiles.
- See page 33 for product info.
- Standard, see page 72 to specify.
- Mid-wireway, see page 76 to specify.
- Stackable, see page 79 to specify.



## T Connector (3-way)

- See page 33 for product info.
- Standard, see page 72 to specify.
- Mid-wireway, see page 76 to specify.
- Stackable, see page 79 to specify.



## S Connector (Straight)

- See page 33 for product info.
- Standard, see page 73 to specify.
- Mid-wireway, see page 77 to specify.
- Stackable, see page 80 to specify.




## M Connector (5/8" Wall Mount)

- See page 33 for product info.
- Standard, see page 74 to specify.
- Stackable, see page 81 to specify.




## W Connector (2 3/4" Wall Mount)

- See page 33 for product info.
- Standard, see page 74 to specify.
- Stackable, see page 81 to specify.




## Y Connector (3-way 120°/120°/120°)

- See page 33 for product info.
- See page 75 to specify.




## Panel-to-Panel Hi-Lo Trim Kits

- See page 35 for product info.
- Standard, see page 82 to specify.
- Stackable, see page 86 to specify.




## Connector-to-Panel Hi-Lo Trim Kits

- See page 35 for product info.
- Standard, see page 82 to specify.



**Power Distributions**

- See page 39 for product info.
- Standard 8-wire, see page 102.
- Enhanced 10-wire, see page 104.




**Jumper Cables**

- See page 39 for product info.
- Standard 8-wire, see page 102
- Enhanced 10-wire, see page 104.




**Duplex Receptacles**

- See page 39 for product info.
- Standard 8-wire, see page 103.
- Enhanced 10-wire, see page 104.




**Power Entries**

- See page 40 for product info.
- Standard 8-wire, see page 103.
- Enhanced 10-wire, see page 105.




**Ceiling Power Entry Assembly**

- See page 40 for product info.
- See page 105 to specify.




**New York City Power Entries**

- See page 41 for product info.
- See page 106 to specify.




**Hardwire Box Assemblies**

- See page 41 for product info.
- See page 107 to specify.




**Hardwire Branching Conduit**

- See page 41 for product info.
- See page 107 to specify.




**Hardwire Ceiling Power Entry Conduit**

- See page 107 to specify.



**Hardwire Cover Plates**

- See page 41 for product info.
- See page 107 to specify.



**Communication Wireway Covers**

- See page 108 to specify.



**Vertical Cable Manager**

- See page 109 to specify.

**Frameless glass** is field installed to the frame with model-specific square profile top cap and glass holders. Clear glass is  $\frac{3}{8}$ " thick and available in 24", 30", 36", 42", and 48" widths.

**Top caps** are attached by friction fit on top of panels.

**Top end bracket** attaches end trim to panel.

**Stackable panels** are available in 7", 12", and 19"H. Maximum panel height with stackable panels is 118".

**Top and bottom connector brackets** draw panels together in a rigid steel-to-steel interference fit with two  $\frac{1}{4}$ " threaded fasteners. NAAB locating clamps, welded to the brackets, create a rigid connection, and consistent narrow reveals.

**Wireway covers** (2 per panel) are available non-punched or punched to provide access to electrical components.

**Bottom end brackets** attach end trim to panel. 3" floor glide is included, and provides  $2\frac{3}{4}$ " of adjustment.

**Directional connector top caps**, included with connectors, finish the top of a panel connection. Top cap is screwed to brackets.

**Connectors and stackable connectors** are available to join two or more panels when changing directions in a panel run (T-connector shown).

**Metal J-channels** along the full height of panels and connectors, provide slots at 1" increments for vertical positioning of components.


**End trims** are available in softened, square, and transitional profiles. They attach as a connector.

**Panels** are  $2\frac{5}{8}$ " thick and available in tackable acoustical, combination, mid-wireway, glass, and sectional models.


**Wireways** allow cable routing through the panel base and holds power distribution assemblies in powered panels. Wireways are  $4\frac{3}{8}$ "H and  $2\frac{1}{2}$ "D.

Statement of Line	➤ See page 20
Application Guidelines	36
Power & Data Overview	38
Pricing	47


### Top Cap Profiles:



Softened (A)



Square (C)



Transitional (T)

**Softened and square profile top caps** are available in wood and paint.

**Transitional profile top caps** are available in wood.

*Note: Panel top caps, connector top caps, and end trims are available in all three profiles.*

### Electrical:



**Class A**—Tackable acoustical, mid-wireway, ceiling power entry, and partial glass panels

**Class C**—Combination panels, sectional panels with fabric, painted, wood, or combination tiles

Features	➤ See page 23
Application Guidelines	36
Power & Data Overview	38

## Details




**Tackable acoustical panels** are 2 $\frac{5}{8}$ " thick. Solid hardboard center septum is covered with two densities of fiberglass and the selected fabric.



**Combination panels** have fabric on one side and wood or non-metallic paint on the other. Two densities of fiberglass are covered with fabric on one side. The other side consists of wood composite covered with premium grade veneer or painted UV-filled medium-density fiberboard.

**Tackable acoustical and combination panels** include:

- Top cap
- Two wireway covers
- Power distribution assembly, if powered panel is specified
- Attachment brackets



**Metal J-channels** along the full height of all panels provide slots at 1" increments for vertical positioning of components.

## Finishes & Materials

### Tackable Acoustical Panels

- Kimball Office panel fabrics
- COM

*Note: COM fabrics must be U.L. listed for use on panels.*

➤ See page A20 for complete information regarding U.L. approval procedures.

### Combination Panels

- Fabric/wood combination
- Fabric/paint combination (excluding metallics)

### Top Caps

- Wood
- Paint (not available on transitional profile)


### Wireway Covers

- Paint

## Acoustical Ratings

- NRC rating = .75
- STC rating = 22

## Connections

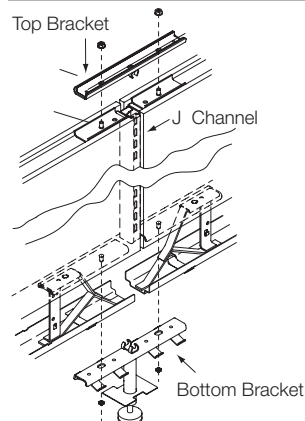


**Top and bottom connector brackets** draw adjacent panels together in a rigid steel-to-steel interference fit with two 1/4" threaded fasteners. NAAB locating clamps, welded to the brackets, create a rigid connection, and consistent narrow reveals. *Note: The number of brackets is determined automatically based on your order. Ordering extra connectors or end trims will result in a shortage of brackets. Additional top (model ATP) and bottom (ABP) brackets will need to be specified separately as service parts.*

**Connectors** are available to join panels when changing directions in a panel run. Connectors are constructed of extruded aluminum and include factory installed J-channels.

➤ See page 33.

**Power distribution assembly**, factory-installed in the base wireway of 24"W and wider powered panels, allows distribution of power. Power distribution assembly can also be field-installed on non-powered panels. ➤ See page 39.

**18"W panels** can be used to pass power from one panel to another, but cannot accept receptacles. They are only available with non-punched wireway covers.



**Punched and non-punched wireway covers** are available for base, mid-wireway, hardwire and New York City applications. Receptacle cutouts are 2 $\frac{15}{16}$ "W and 1 $\frac{15}{16}$ "H. Hardwire cutouts are 2 $\frac{11}{16}$ "W and 1 $\frac{7}{16}$ "H. ➤ See pricing pages for powered wireway punch options. ➤ See page 46 for hardwire wireway punch options.

**Base wireways** can accommodate 8 1/4"-diameter cables at 40% fill, and 44 1/4"-diameter cables at 100% fill.

## Planning Factors

**When combining fabric grades on a single panel**, add side 1 fabric grade price to side 2 fabric grade price, then divide the total by 2 to get the average.

**Combination panels** can create a different visual for inside and outside an office, or they can be used as an accent when the outside of the panel is used to create a hall or walkway.

## Related Products

**Electrical jumper cables and receptacles** must be specified separately.


➤ See pages 102–104.

**Communication wireway covers** must be specified separately. Cutouts for data ports are 2 $\frac{11}{16}$ "W and 1 $\frac{3}{8}$ "H. ➤ See page 108.

**Traxx and tiles** are available to integrate wall-mount applications with panel applications.

➤ See page 337.


## Details



**Mid-wireway panels** are 25/8" thick and provide electrical and communications access at worksurface height. Solid hardboard center septum is covered with two densities of fiberglass and fabric.

**Mid-wireway models** include:

- Top cap
- Four wireway covers
- Power distribution assembly for base wireway
- Attachment brackets



**Vertical wireway channel in mid-wireway panels**, located between cutouts in fiberglass and septum, extends from mid-height to base wireway. It is 2.6 sq. inches and located 14" from one edge of the panel.

## Finishes & Materials

### Mid-Wireway Panels

- Kimball Office panel fabrics
- COM

*Note: COM fabrics must be U.L. listed for use on panels.*

➤ See page A20 for complete information regarding U.L. approval procedures.

### Top Caps

- Wood
- Paint (not available on transitional profile)

### Wireway Covers

- Paint

## Connections

**Top and bottom connector brackets** draw adjacent panels together in a rigid steel-to-steel interference fit with two 1/4" threaded fasteners. NAAB locating clamps, welded to the brackets, create a rigid connection, and consistent narrow reveals.

➤ See page 24 for illustration.

**Connectors** are available to join panels when changing directions in a panel run.

➤ See page 33.


## Power & Data

**Electrical components** used in mid-wireways are the same as those used for base wireways; specified separately.

**Power distribution assembly**, factory-installed in the base wireway of powered mid-wireway panels, allows distribution of power. Power distribution assembly can also be field-installed on non-powered panels.

➤ See page 39.

**Mid-wireways** can accommodate 31 1/4"-diameter cables at 40% fill, and 78 1/4"-diameter cables at 100% fill.




**Punched and non-punched wireway covers** are available for mid-wireway. Receptacle cutouts are 215/16"W and 115/16"H. Hardwire cutouts are 211/16"W and 17/16"H.

➤ See pricing pages for punch options.


➤ See page 46 for hardwire wireway punch options.

## Planning Factors

**Jumper cables**, which pass power from base wireway to mid-wireway, will displace one receptacle at base and mid-height.



**On 36"W or wider panels**, jumper cables from mid-wireway to base must be installed on same side of panel at top and bottom.



**On 24"W and 30"W panels**, jumper cables can connect to AEDs at the same end, or at opposite ends.

## Related Products

**Electrical jumper cables and receptacles** must be specified separately.


➤ See pages 102–104.

**Communication wireway covers** must be specified separately. Cutouts for data ports are 211/16"W and 13/8"H.

➤ See page 108.



## Details




**Ceiling power entry panels** are available for installations when building power will be accessed from the ceiling. 1/8" thick hardboard center septum is covered with two densities of fiberglass and the selected fabric.

**Ceiling power entry panels** include:

- Power pole
- Divided top cap
- Wireway covers
- Power distribution assembly
- Attachment brackets

*Note: Ceiling power entry assembly must be specified separately.*



**Two full-height vertical channels** route power and communications cabling to the base wireway. Channels are located inside the panel 12 inches from one edge. Each channel, or vertical wireway, is 2.6 sq. inches and is located between the fiberglass and septum.

## Finishes & Materials

### Ceiling Power Entry Panels

- Kimball Office panel fabrics
  - COM
- Note: COM fabrics must be U.L. listed for use on panels.*

➤ See page A20 for complete information regarding U.L. approval procedures.


### Top Caps

- Wood
- Paint (not available on transitional profile)

### Wireway Covers

- Paint

## Connections




**Extruded aluminum vertical power pole**, standard with ceiling power entry panel, attaches to the top of the panel to extend the channel to ceiling height. Power pole is 5 1/2"W, 1 3/8"D, and 82"H. Any excess height telescopes into the ceiling or can be cut to size at the installation site.

**Top and bottom connector brackets** draw adjacent panels together in a rigid steel-to-steel interference fit with two 1/4" threaded fasteners. NAAB locating clamps, welded to the brackets, create a rigid connection, and consistent narrow reveals. ➤ See page 24 for illustration.

**Connectors** are available to join panels when changing directions in a panel run. Connectors are constructed of extruded aluminum and include factory installed J-channels.

## Power & Data

**Power distribution assembly**, factory-installed in the base wireway allows distribution of power. Power distribution assembly can also be field-installed on non-powered panels. ➤ See page 39.



**Punched and non-punched wireway covers** are available for base, hardwire and New York City applications. Receptacle cutouts are 2 15/16"W and 1 15/16"H. Hardwire cutouts are 2 1 1/16"W and 1 7/16"H. ➤ See pricing pages for powered wireway punch options. ➤ See page 46 for hardwire wireway punch options.


**Base wireways** can accommodate 18 1/4"-diameter cables at 40% fill, and 44 1/4"-diameter cables at 100% fill.

**Each vertical channel** can accommodate 20 1/4"-diameter cables at 40% fill.

## Planning Factors

**When combining fabric grades on a single panel**, add side 1 fabric grade price to side 2 fabric grade price, then divide the total by 2 to get the average.

## Related Products




**Ceiling power entry assembly** should be specified separately when power will be accessed from the ceiling to enable routing of power into ceiling power entry panel. ➤ See page 40.

**Electrical jumper cables and receptacles** must be specified separately. ➤ See pages 102–104.

**Communication wireway covers** must be specified separately. Cutouts for data ports are 2 1 1/16"W and 1 3/8"H. ➤ See page 108.



## Details



**Full or partial glass panels** are available. Partial glass panels have glass in the upper portion and fabric on the bottom.

**Glass panel models** include:

- Top cap
- Two wireway covers
- Power distribution assembly, if powered panel is specified
- Attachment brackets

**Tempered glass** is 1/4" thick and secured with a concealed channel liner.

**Frames** are constructed of aluminum and are painted or covered with wood or fabric.

## Finishes & Materials

### Full Glass Panels

- Tempered glass: clear

### Partial Glass Panels

- Tempered glass: clear
  - Kimball Office panel fabrics or COM
- Note: COM fabrics must be U.L. listed for use on panels.*

➤ See page A20 for complete information regarding U.L. approval procedures.

### Panel Frame

- Wood
- Paint
- Fabric

### Top Caps

- Wood
- Paint (not available on transitional profile)

### Wireway Covers

- Paint

## Connections

**Top and bottom connector brackets** draw adjacent panels together in a rigid steel-to-steel interference fit with two 1/4" threaded fasteners. NAAB locating clamps, welded to the brackets, create a rigid connection, and consistent narrow reveals.


➤ See page 24 for illustration.

**Connectors** are available to join panels when changing directions in a panel run. Connectors are constructed of extruded aluminum and include factory installed J-channels.

## Power & Data

**Power distribution assembly**, factory-installed in the base wireway of 24"W and wider powered panels, allows distribution of power. Power distribution assembly can also be field-installed on non-powered panels.

➤ See page 39.



**Punched and non-punched wireway covers** are available for base, mid-wireway, hardwire and New York City applications. Receptacle cutouts are 2<sup>15</sup>/<sub>16</sub>"W and 1<sup>15</sup>/<sub>16</sub>"H. Hardwire cutouts are 2<sup>1</sup>/<sub>16</sub>"W and 1<sup>7</sup>/<sub>16</sub>"H.

➤ See pricing pages for powered wireway punch options.

➤ See page 46 for hardwire wireway punch options.

**Base wireways** can accommodate 18 1/4"-diameter cables at 40% fill, and 44 1/4"-diameter cables at 100% fill.

## Related Products


**Electrical jumper cables and receptacles** must be specified separately.

➤ See pages 102–104.

**Communication wireway covers** must be specified separately. Cutouts for data ports are 2<sup>1</sup>/<sub>16</sub>"W and 1<sup>3</sup>/<sub>8</sub>"H.

➤ See page 108.

## Details



**Sectional panel frames and sectional tiles** are specified separately. Sectional panels can be used in conjunction with monolithic panels.

**Frames** are constructed of black steel tubing. Frames are completely covered by sectional tiles. Frames models include:

- Top cap
- Two wireway covers
- Power distribution assembly, if powered panel is specified
- Attachment brackets

**Metal J-channels** along the full height of panel frame provide slots at 1" increments for vertical positioning of components.

**Sectional tiles** are available in fabric, slat, glass, ventilated, wood, or paint.

IMPORTANT: Sectional tiles in this section are for use on Cetra sectional panels only.

**Two tiles** are required for each section; one for each side of the panel.

**Horizontal extruded aluminum channels on the frame** hold tiles in place.

**Fabric tiles** are constructed of 1/2" thick wood composite covered with the selected fabric. Tiles are non-tackable and non-acoustical.

**Slat tiles** have 1" slats. Slat tiles are constructed of extruded aluminum.

**Glass tiles** have an extruded aluminum frame. Top and side frame rails are 2 3/4"W; bottom frame rail is 1 1/16"W. Glass tiles cannot be used in 30"H panel frames. They are not visually compatible with glass stackable panels

**Ventilated tiles** have an extruded aluminum frame. Top, bottom and side frame rails are 2 3/4"W.

**Wood tiles** are constructed of 1/2" thick wood composite covered with premium veneer.

**Painted tiles** are 1/2" thick filled medium density fiberboard. They are not available in metallic paints.

## Finishes & Materials

### Sectional Panel Frames

- Metal: black only

### Fabric Tiles

- Kimball Office panel fabrics or COM
- Note: COM fabrics must be U.L. listed for use on panels.*

### Slat, Ventilated, and Paint Tiles

- Paint
- Note: Metallic paint is excluded for Paint tiles, but is available on slat, and ventilated.*

### Glass Tiles

- Tempered glass: clear or frosted
- Tile frame: paint

### Wood Tiles

- Wood finishes


### Top Caps

- Wood
- Paint (not available on transitional profile)

### Wireway Covers

- Paint

## Sectional Panel Tile Application Guidelines:

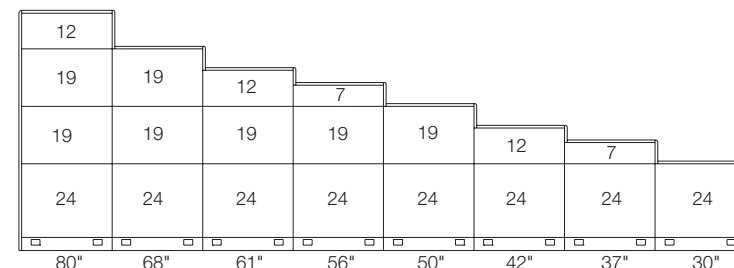

## Connections

**Top and bottom connector brackets** draw adjacent panels together in a rigid steel-to-steel interference fit with two 1/4" threaded fasteners.

➤ See page 24 for illustration.

**Connectors** are available to join panels when changing directions in a panel run.

➤ See page 33.

## Power & Data

**Power distribution assembly**, factory-installed in the base wireway of 24"W and wider powered panels, allows distribution of power. Power distribution assembly can also be field-installed on non-powered panels.

➤ See page 39.

**18"W panels** can be used to pass power from one panel to another, but cannot accept receptacles. They are only available with non-punched wireway covers.

**Punched and non-punched wireway covers** are available for base, hardwire, and New York City applications. Receptacle cutouts are 2 15/16"W and 1 15/16"H. Hardwire cutouts are 2 1 1/16"W and 1 7/16"H.

**Base wireways** can accommodate 18 1/4"-diameter cables at 40% fill, and 44 1/4"-diameter cables at 100% fill.

## Related Products

**Electrical jumper cables and receptacles** must be specified separately.

➤ See pages 102–104.

## Details



**Stackable panels** are available in fabric, combination, glass, and ceiling power entry. Stackable panels are for use with any standard Cetra panel to accommodate height changes up to full enclosure. Models include:

- Panel
- Attachment brackets

*Note: Top cap from base panel will be used on stacking unit.*

**Heights available** include 7", 12", and 19". Specify appropriate stackable panel to increase the height of workstation. Stackable panel heights coordinate with sectional tile heights for a consistent look when using both products in the same office setting.

**Stackable fabric panels** are constructed of a 1/8" thick hardboard septum covered with two densities of fiberglass and fabric (7"H panel has only one density of fiberglass per side).




**Stackable combination panels** are constructed of two densities of fiberglass covered with fabric on one side and wood composite covered with premium veneer or UV filled medium density fiberboard painted to specification on the other side.



**Stackable glass panels** are constructed of tubular aluminum frames. Tempered glass is available in clear and frosted. Glass is secured in the channel with a concealed channel liner. Stackable glass panels are not visually compatible with sectional glass tiles.



**Stackable ceiling power entry panels** are constructed with a 1/8" thick hardboard center septum covered with two densities of fiberglass and fabric.



**Two full-height vertical channels** in ceiling power entry model route power and data cabling to the base wireway.

## Finishes & Materials

### Stackable Acoustical Panels

- Kimball Office panel fabrics
- COM

*Note: COM fabrics must be U.L. listed for use on panels.*

➤ See page A20 for complete information regarding U.L. approval procedures.

### Stackable Combination Panels

- Fabric/wood combination
- Fabric/ paint combination (excluding metallics)


### Stackable Glass Panels

- Glass: clear or frosted
- Frames: fabric, wood, or paint


### Stackable Ceiling Power Entry Panels

- Kimball Office panel fabrics
- COM

## Connections



**A maximum of two panels** can be stacked on to a standard panel. Maximum panel height with stackable panels is 118".



**Floor-to-ceiling applications** can be accommodated using the floor-to-ceiling top channel.

➤ See page 37 for application guidelines.

**Floor-to-ceiling top channels** provide a light and sound seal, but do not attach to the ceiling. Channel is constructed of extruded PVC.

**Stackable panels are loadbearing** and will support overheads when used according to guidelines.

➤ See page 36 for panel run rules.


## Planning Factors

➤ See page 37 for additional application guidelines for stackable panels.

**Stackable panels may be installed on any standard Cetra panel**, new or existing, without disassembling the existing panel run.

**Stackable panels must be the same width** as the panel they will be stacked above.

## Related Products




### Ceiling power entry assembly

➤ See page 40.

### Floor-to-ceiling top channels


➤ See page 68.

## Details




**Frameless glass** is clear,  $\frac{3}{8}$ " tempered glass with flat polished edges. Model includes:

- Glass
- Two aluminum glass holders
- Two stainless steel set screws
- Four clear gaskets
- Square profile top cap
- Attachment bolts
- Two threaded plates
- Attachment screws



**Two aluminum glass holders** are standard with each piece of glass and are available in any paint color, independent of the top cap. The glass is centered between the glass holders and held in place with two clear gaskets per glass holder and a stainless steel set screw.



**Glass sits  $\frac{9}{16}$ " off the top cap** when installed. Adjacent frameless glass models are designed to be off-set from one another with a  $1\frac{1}{8}$ " gap.

**When used in a hi-lo application**, the top of the frameless glass will be flush with the top of the adjacent panel's top cap.


**U.L. Listing** 1286

## Finishes & Materials

### Frameless Glass

- Glass: clear
- Glass holders: paint
- Top cap: wood or paint

## Connections



**Square profile top cap**, standard with frameless glass model, features pre-drilled holes, which allow the aluminum glass holders to be securely bolted to the panel frame in the field and facilitates correct placement.

## Planning Factors

**Frameless glass is not loadbearing.** Hanging components or accessories on frameless glass is not recommended.

**Frameless glass cannot be scribed** in the field.

**Cetra frameless glass cannot span more than one panel** and must be the same width as the panel to which it is attached.

**Cetra frameless glass models cannot be used on Xsite;** likewise, Xsite frameless glass models cannot be used on Cetra panels.


**Cetra frameless glass models cannot be attached to full glass, partial glass, or stackable glass panels**, nor can they be used in a hi-lo-hi application.

**Cetra frameless glass** is not recommended on low panels adjacent to high-traffic areas.

## Overall Heights:

Panel Height	Overall Height incl. Frameless Glass
30"	42 $\frac{1}{4}$ "
37"	49 $\frac{1}{4}$ "
42"	54 $\frac{1}{4}$ "
50"	61 $\frac{1}{4}$ "
56"	68 $\frac{1}{4}$ "
61"	73 $\frac{1}{4}$ "
68"	80 $\frac{1}{4}$ "
80"	92 $\frac{1}{4}$ "

## Details



**Privacy panels** are available 36" or 42"W and in three designs: fabric on both sides, fabric/markerboard combination, or translucent.

**Privacy panel models** include:

- Top attachment bracket
- Base pivot bracket
- Caster

**Fabric and fabric/markerboard combination privacy panels** have an extruded aluminum frame. Interior is fiberglass over a honeycomb panel.

**Translucent privacy panels** feature a ribbed pattern to provide privacy, yet allow light to pass through. Frame is extruded aluminum.

**Single caster** allows privacy panel to pivot open or closed.

## Finishes & Materials


### Privacy Panel Frame

- 462 Cinder paint
- 501 Platinum metallic paint


### Privacy Panel Inserts

- Kimball Office panel fabric
- Markerboard: 488M Frosty White
- Translucent

## Connections




Top bracket




Top bracket shown on Cetra panel

**Top attachment bracket** is used to mount the privacy panel to any 68"H Cetra panel. Top bracket attaches under the top cap and can be easily relocated.




**Base pivot bracket** features a carpet gripper to hold bracket in place while allowing the privacy panel to swing.




**Privacy panels abut the opposite panel**, but do not latch.

**Non-handed and reversible**, privacy panels can be mounted left or right, and can be flipped so the markerboard or different fabrics can be positioned inside or outside the workstation.

## Planning Factors




**When mounted to the perpendicular panel** (on one or both sides) in an L or T configuration, panel swings 90°.



**When mounting in a straight panel run**, specify privacy panel to be wider than the opening to allow for proper clearance. Panel swings 180° to lay flat against the Cetra panel.

## Details




**Hinged doors** are available 36" or 42"W (nominal). All models include:

- Frame and threshold
- Top cap
- Full-length hinge
- Frame gasket
- Attachment brackets

**Hinged doors** are 1¾" thick and feature a honeycomb interior. Frame is extruded aluminum.

**Full-length hinge** is used for strength and durability.

**Frame gasket** protects the door when closing and quiets closure.



**Locking lever** is available and is suitable for ADA guidelines.

**Door opening width** for the 36"W door is 31¼"; for the 42"W door it is 37¼". Opening height is 76⅜". 42"W hinged doors or gates are recommended for ADA compliance. Doors are interchangeable with other 80"H panels.

## Finishes & Materials

### Door

- Wood finishes
- Paints (excluding metallics)

### Door Frame

- Paint

### Top Caps

- Wood
- Paint (not available on transitional profile)


## Connections

### An adjustment to the bottom bracket of hinge doors and gates


is required when installation is next to a directional connector. The correct bracket must be specified separately. *Note: The correct bracketry adjustment will be generated for drawings made using an electronic specification tool. If not using an electronic specification tool, then use the guidelines provided.*

### Bottom Bracketry Adjustment Guidelines


#### T Connections:



In this situation, substitute the bottom "T" bracket (ABT) with a bottom "L" bracket (ABL), specified separately.




In this situation, substitute the bottom "T" bracket (ABT) with a bottom straight connector bracket (ABS), specified separately.




In this situation, substitute the bottom "T" bracket (ABT) with a bottom door end connector bracket (ABD). Also specify a door plate (ABDU) to support the T connector wireway cover.

#### L Connections:



In this situation, substitute the bottom "L" bracket (ABL) with a bottom door end bracket (ABD), specified separately.


#### Straight Connections:



When door panel is located between two panels in a straight run, no adjustment is required.

## Planning Factors

**Hinged doors** must not be placed more than one 36"W panel from a directional connector or a wall mount. Hinged doors cannot be placed next to Y or V connectors.




**Maximum panel run** when using doors is 16' or 4 panels. Panels must be supported on both ends.

**IMPORTANT:** Hinged doors cannot be used in unsupported panel runs.

**Specify a W connector** (2¾" wall mount) when wall mounting a hinged door for greater adjustment to compensate for out-of-plumb walls.

## Details



**Connectors** are available to join two or more panels when changing directions in a panel run.


**Connector models** include:

- Connector
- Top cap
- Wireway cover
- Connection bracketry

**Connectors** are constructed of extruded aluminum.

**Metal J-channels** along the full height of all connectors provide slots at 1" increments for vertical positioning of components.

**Connector top caps** are available in softened, square, and transitional profiles.



**Mid-wireway connectors** enable power and data to be passed from one panel to another at worksurface height when changing directions.

**Stackable connectors** are available for use with stackable panels.  
➤ See page 34.

## Finishes & Materials

### Connectors and Stackable Connectors

- Kimball Office panel fabrics
  - COM
- Note: COM fabrics must be U.L. listed for use on panels.*

➤ See page A20 for complete information regarding U.L. approval procedures.

- Paint
- Wood
- Fabric/wood combination
- Fabric/paint combination

### Connector Top Caps

- Wood
- Paint (not available on transitional profile)

### Connector Wireway Covers



- Paint

## Connections

**Connectors** can be used in the following configurations:

- L (2-way 90°)
- T (3-way 90°)
- X (4-way 90°)
- S (straight 180°)
- M or W (wall mount)
- V (2-way 135°)
- Y (3-way 120°/120°/120°)

➤ See pricing pages for illustrations of each configuration.



**S connectors (straight)** are available to fill parallel panel runs where one panel run has a connector and the other does not. It is not required to join panels.

**Y connectors** are available for use in 120° applications. They cannot be used next to hinged doors.

## Power & Data

**Power and data** can be routed through connectors.

➤ See page 39 for mid-wireway jumper applications.

➤ See page 44 for cable management information.

## Planning Factors

**Specify appropriate connectors** for the combined height of standard and stackable panels. Base connector must always be the same height or taller than any adjacent standard panel.

**Allow for connector thickness** when space planning.

- Connectors are 25/8" thick.
- M wall-mount connectors are 5/8" thick.
- W wall-mount connectors are 23/4" thick.


**Thickness of the M wall-mount connector** corresponds to Traxx.

M connectors have no adjustability for out-of-plumb walls; shimming may be required.

**W wall-mount connectors** offer 5/8" lateral adjustment to compensate for out-of-plumb walls.



## Details



**Stackable connectors** are available to join panels when changing directions in a panel run with stackable panels.

### Stackable connector models include:

- Connector
- Connection bracketry

*Note: Top caps are not included. Top cap from base connector will be used.*

**Connectors** are constructed of extruded aluminum.

**Metal J-channels** along the full height of all connectors provide slots at 1" increments for vertical positioning of components.

## Finishes & Materials

### Stackable Connectors

- Kimball Office panel fabrics
  - COM
- Note: COM fabrics must be U.L. listed for use on panels.*
- See page A20 for complete information regarding U.L. approval procedures.
  - Paint
  - Wood
  - Fabric/wood combination
  - Fabric/paint combination

### Connector Top Caps

- Wood
- Paint (not available on transitional profile)

## Connections

**Connectors** can be used in the following configurations:

- L (2-way 90°)
- T (3-way 90°)
- X (4-way 90°)
- S (straight 180°)
- M or W (wall mount)

➤ See pricing pages for illustrations of each configuration.

*Note: Y configurations are not available in stackable models.*

## Planning Factors


### Allow for connector thickness

when space planning.


- Connectors—2 $\frac{5}{8}$ " thick
- M connectors— $\frac{5}{8}$ " thick
- W connectors—2 $\frac{3}{4}$ " thick

**Specify appropriate connectors** for the combined height of standard and stackable panels. Base connector must always be the same height or taller than any adjacent standard panel.


**Stackable connectors** can be specified in one of three ways:




- ① Specify stackable connectors to equal each stackable panel height. Provides the most flexibility for reconfiguration.



- ② Specify one stackable connector equal to the height of both stackable panels. Enables the panel height to be lowered without taking down the station; however, it provides less flexibility during reconfiguration.



- ③ Specify a connector equal to the combined height of the base panel and stackable panels. This option limits the ease of reconfiguration since the workstations will need to be completely disassembled to change panel heights.



**When using square profile trim, different connectors** may be used above a base connector.  
*Example: T connector may be used on the bottom with an L connector on the top. This creates a change of height at a connector, however, stackable panels must be used on both sides of the L connector for support.*


**When the stackable connector is the same as the base connector,** the top cap is removed from the base connector and placed above.

**When an stackable connector is different than a lower connector,** a new top cap bracket assembly for the upper connector needs to be specified.

➤ See page 100.

**Specify the same profile for both base and stackable connectors** to ensure visual compatibility.

## Details



**End trim is 1" thick and** covers the vertical panel edge at the end of each panel run.

**Hi-lo trim kits** finish off the vertical end of panels when transitioning heights. Kit includes:

- Vertical end trim
- Bracket
- Top cap for the lower panel

**Panel-to-panel or connector-to-panel** hi-lo trim kits are available.

**End trim and hi-lo trim kits** are available in softened and square profiles (paint and wood) and in transitional profile (wood only).

## Finishes & Materials

### End Trim

- Wood
- Paint (not available on transitional profile)


### Hi-Lo Trim Kits

- Wood
- Paint (not available on transitional profile)

## Connections

**Hi-lo trim kits** cannot be used:

- Next to a connector (stackable or standard) when the connector is being used next to stackable panels.
- Next to a Y connector.
- Next to a floor-to-ceiling top channel.



**Overheads** cannot be hung in a row of stackable panels where a hi-lo trim kit is used. They may be hung in a row beneath the hi-lo application.

## Planning Factors

**Specify end trim and hi-lo trim kits for the combined height** of panels and stackable panels.

**Allow for end trim thickness of 1"** when space planning.

**To specify hi-lo trim kits**, determine the following:

- ① Height of the drop
- ② Width of the lower panel
- ③ Top cap profile

*Note: Hi-lo trim kits for stackable panels are determined the same as for standard panels.*


**IMPORTANT:** When you specify a hi-lo trim kit to be used with a directional connector, the appropriate connector top cap/bracket assemblies must be specified separately.

➤ See page 101.


### Due to the notching operation

which must be done to the top cap of the lower panel in a hi-lo situation, a single lower panel may not be placed between two higher panels. To achieve the look of a single panel drop, specify two panels that equal the desired width (36" minimum).


**Hi-lo trim kits** are not available in heights less than 5" due to the attachment method.




**Minimum wing widths apply** to a freestanding “C” station that does not have support from a panel run or a wall connector at either end. Panels can be any height; however wing panels must be the same height as the panel run. The width of the wing wall increases according to height.  
▶ See chart for minimum wing width.




**Maximum panel run for unsupported panels** (those not attached to a wall, wing panel, or floor support on BOTH ends) is 3 panels with a maximum run of 12'.  
▶ See chart for minimum wing width.



**Maximum panel run for supported panels** (those supported with a wall or panel run on one end and a **same-height wing panel** on the other) is 7 panels with a maximum run of 28'. The width of the wing wall increases according to height.  
▶ See chart for minimum wing width.




**Maximum panel run supported panels** (those supported with a wall or panel run on one end and a **wing panel that is shorter than the spine** on the other) is 4 panels with a maximum run of 16'.




**Maximum panel run for supported glass panels** (those supported with a wall or panel run on one end and a minimum width wing panel on the other) is 3 panels with a maximum run of 9'.  
▶ See chart for minimum wing width if wing panel will be used for support on both ends of the run.

*Note: Frameless glass cannot be attached to glass panels.*



**Overhead cabinets** may be hung on the inside of the panel system on a maximum of three panels no greater than 12 feet. When cabinets are hung on both sides of this type of panel run, so as to counter balance the load, the length may be increased to four panels or 16 feet. For proper support, a wing panel or wall mount must be adjacent to both ends of any run of overheads.

*Note: Overhead must be ganged to assure maximum rigidity.*



**Overhead cabinets** may be stacked as long as the 12' and 16' (counter balanced) guidelines in the previous paragraph are followed. There may be a maximum of two rows of overheads unless stacking on one panel between two wing panels. Allow a minimum of 7" between overheads for proper clearance of flipper doors.

**Frameless glass** does not affect application guidelines, except where noted.

## Definitions:

**Unsupported panel runs:** Runs not attached on BOTH ends to a wall, panel run, or floor support.

**Floor support:** Undersurface storage units, support panels, or column legs

**Balanced back-to-back:** Runs having similar components mounted to opposite sides of the run so as to counter-balance the load.

## Minimum Wing Panel Widths:


Minimum wing panel widths increase according to the height of the panel run to eliminate the possibility of tipping or injury under standard loading and usage.

Spine Run	Minimum Wing Width
30", 37", 42", or 50"H	24"
56", 61", or 68"H	30"
80"H	42"
Combination panels	48"

**IMPORTANT:** Wing panel height is not required to be the same height as the panel run, except in free-standing “C” applications, 80"H supported runs, and runs containing combination panels.

**Stackable panels may be installed on any standard Cetra panel**, new or existing, without disassembling the existing panel run.

**Stackable panels must be the same width** as the panel they will be stacked above.




**Only two stackable panels** may be stacked above a standard panel to a maximum height of 118".

**Frameless glass** can be used on all stackable panel models, except glass stackables. Maximum height with glass is 130 1/4"


**Panel run rules** are the same for stackable panels as for standard Cetra panels.

➤ See page 36.

**Stackable panel runs** must have a wing panel that is equal to the combined height of the base panel plus the stackable panels, on at least one end for support.



**For proper support**, stackable panels must either turn a corner or be connected to a monolithic panel that is equal to the height of the base panel plus the stackable panels.




**When using stackable panels to create a "step down or cityscape" effect**, you can only extend out one panel width from the connector.


**End trim height** must match the combined height of the base and stackable panels.

**Stackable panels are load-bearing** and will support overheads when used according to guidelines.

➤ See page 36 for maximum panel run rules.



**Overheads** can not be hung above 80" high.




**Overheads** can not be hung in a row of stackable panels where a hi-lo trim kit is used. They may be hung in a row beneath the hi-lo application.

**Overheads** cannot be hung on a stackable wing wall.

## ATET Bracketry Guidelines:

*Note: Certain applications require that additional hook brackets (model ATET) be specified separately. One bracket is standard with stackable panel.*



Need 16 ATET  
Will receive 10  
Specify 6 add'l

Need 4 ATET  
Will receive 2  
Specify 2 add'l

When stackable panel heights are staggered, you will need 1 additional ATET bracket per panel to connect the lower stackable panel to the MIDDLE of the adjacent panel. The standard panel-to-panel bracket is used at the top connection.

When stackable panels are used between an end trim and a connector, you will need one additional ATET bracket per stackable panel to connect the bottom of each panel to the end trim on one side and the connector on the other side. The standard connector brackets are used at the top connections.

➤ See page 99 to specify ATET brackets.

## Floor-to-Ceiling Applications:

Floor-to-ceiling top channel is available in 12' lengths and may be field scribed to desired length. Channel provides sound and light seal for space between top of panel and ceiling. Top channel provides 2" of adjustability.

*Note: Hi-lo trim and end trim cannot be used next to top channels.*

### To create a completely enclosed office:

- ① Determine your ceiling height.
- ② Determine the combination of standard and stackable panels that will come closest to, but below ceiling height. (Maximum of two stacking panels above a standard panel.) For varied ceiling heights use lowest point from floor to ceiling.
- ③ Order floor-to-ceiling top channel based on lineal feet requirement.
- ④ Field scribe floor-to-ceiling top channel on site for required length and to fit around square connectors.
- ⑤ A minimum clearance of 1 1/2" is required to install floor-to-ceiling top channel.

Features	➤ See page 23
Standard 8-Wire System	42
Enhanced 10-Wire System	43

**Cetra panels** offer a standard 8-wire system and an enhanced 10-wire system for increased capacity requirements.

**Standard and enhanced electrical components** are keyed differently to prevent mixing of components.

**Components used to power the mid-wireway** are the same as those used in the base wireway.

**Building-to-panel electrical connections** can be accomplished whether power is sourced in the wall, floor, or ceiling.

**Duplex opening in wireway cover** provides access to duplex receptacles. Openings are located 9" from the panel reveal.

**Communication cables** may be routed through channel in mid-wireway panels to base wireway. For standard panels, route communication cables in the base.

**Power distribution assembly** carries power to receptacles. They are factory installed on powered panels; they can be field installed on non-powered panels.

**Power distribution assembly in mid-wireway** requires field installation and must be specified separately.

**Electrical jumper cables** are used to pass power from panel to panel, from base to mid-wireway, and through directional connectors at the mid-wireway or base wireway. Models are specified based on the panel configuration.  
➤ See page 102 or 104 for details.

**Wireway** is 4½"H x 2½"D.

**Receptacles** are inserted into the power distribution assembly and secured with screws. Up to 4 duplex receptacles may be specified for each base wireway panel. Up to 8 duplex receptacles may be specified for each mid-wireway panel.

**Communication wireway cover** has an additional window for communication ports.  
➤ See page 44 for cable management application guidelines.

### Wireway Cover Options:


- See page 45 for powered and non-powered wireway cover punch options.
- See page 46 for hardwire wireway cover punch options.
- See page 108 for communication wireway covers.

### Punch Dimensions:


Receptacle cutouts—  
2½¼"W x 1½¼"H

Hardwire cutouts—  
2½¼"W x 17¼"H

Data port cutouts—  
2½¼"W x 1¾"H

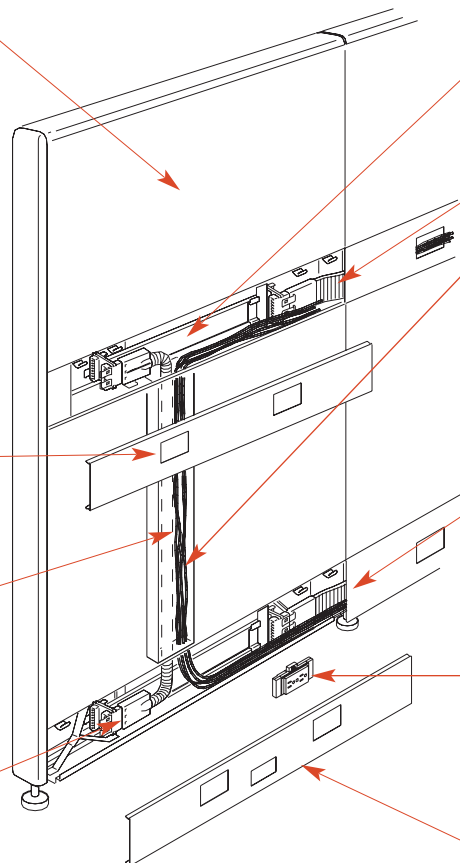

## Details



**Powered panels** feature factory-installed electrical distribution assemblies in the base wireway. Power distribution assembly can also be field-installed on non-powered panels.

**Mid-wireway powered panels** feature factory-installed power distribution assembly in the base. Specify power distribution assembly for mid-wireway separately for field installation.

**Power distribution assemblies and receptacles used to power the mid-wireway** are the same as those used in the base wireway.

**Two wiring configurations** are possible utilizing the same components.  
➤ See pages 42–43 for planning and installation guidelines.




**Duplex receptacles** are rated at 15 amps and may be installed back-to-back in base and mid-wireways.

**Up to four duplex receptacles** (two per side) can be installed in each base wireway.

**Up to eight duplex receptacles** (four per side) may be specified for each mid-wireway panel.

## Connections



**Jumper cables** are used to pass power from panel to panel and from base to mid-wireway.

**18"W panels and 6"W starter panels** have no electrical access; however, 18"W panels can pass power to adjacent panels. Both are available with non-punched wireway covers only.

**When an 18"W panel is used in a T configuration**, one AEJ2 and one AEJ5 jumper must be used to route power through mid-wireway connectors.

➤ See illustrations at right.

## Planning Factors

**IMPORTANT: Planning actual power supplies and branch circuits** must be performed by qualified electricians or electrical engineers familiar with the National Electrical Code and the appropriate local codes. The information provided herein is intended to assist specifiers.

**Hardwire electrical components** for use in the base wireway are available for areas where local codes do not accept modular electrical plug-in components.

➤ See page 41.

**New York City electrical applications** require a special power entry. Panels should be specified as non-powered and electrical distribution assemblies should be specified separately.



➤ See page 41.

Features	➤ See page 23
Power & Data Overview	38
Standard 8-Wire System	42
Enhanced 10-Wire System	43


## Mid-Wireway Jumpers:

To pass power through mid-wireway connectors, specific jumper models are required.


### T Configurations



### L Configurations




### X Configurations




Features	➤ See page 23
Power & Data Overview	38
Standard 8-Wire System	42
Enhanced 10-Wire System	43

## Details



For 8-wire system For 10-wire system

**Floor power entry** is available to bring power to the panel run from the floor or wall.



**Ceiling power entry assembly** is available to bring power to the panel run from the ceiling. It is used in conjunction with ceiling power entry panels.

**Ceiling power entry assembly models** include:

- Junction box
- 12' jumper cable
- Hardware

## Planning Factors

**IMPORTANT: Planning actual power supplies and branch circuits** must be performed by qualified electricians or electrical engineers familiar with the National Electrical Code and the appropriate local codes. The information provided herein is intended to assist specifiers.

**Access to ceiling power source** is regulated by National Code to a maximum of 12 ft. conduit.

**18"W panels and 6"W starter panels** have no electrical access. 18"W panels can be used to pass power from one panel to another, but cannot accept receptacles or power entries.

**Power entries** will take up the space of one receptacle location on the power distribution assembly.

## Related Products

**Hardwire electrical components** are available for areas where local codes do not accept modular electrical plug-in components.  
➤ See page 41.


**New York City electrical applications** require a New York City power assembly for the panel where power entry is made.  
➤ See page 41.




Features	➤ See page 23
Power & Data Overview	38
Standard 8-Wire System	42
Enhanced 10-Wire System	43

## Details


**Hardwire panel option and components** should be specified to accommodate hardwire applications.




**Junction box**, specified separately, is required for each panel that will receive field-installed hardwired electrical.



**Branching conduit** is used between boxes and for panel-to-panel connections. Conduit must be listed, 1/2" trade-size Greenfield.



**Cover plates** are available in black only. Blank junction box cover plate is required to cover junction box or power entry boxes. Cover plates from other sources will not fit properly.



**New York City electrical applications** require a special power entry. Panels should be specified as non-powered; power distribution assemblies should be specified separately.

## Connections


**Installations** must be completed by a qualified electrician or an electrical engineer familiar with the National Electrical Code and the appropriate local codes.

## Planning Factors


**IMPORTANT: Planning actual power supplies and branch circuits** must be performed by qualified electricians or electrical engineers familiar with the National Electrical Code and the appropriate local codes. The information provided herein is intended to assist specifiers.

**18"W panels** are not available with the hardwire option.

## Standard 8-Wire Electrical System



**Cetra 8-wire, 4-circuit system** supports work environments having light- to medium-intensity computerized equipment needs. The 8-wire systems include two 12-gauge ground wires, two 10-gauge neutral wires, and four 12-gauge hot wires.



**Powered panels** feature factory-installed electrical distribution assemblies in the base wireway. Power distribution assemblies can be field-installed on non-powered panels.  
➤ See page 39.

**Two wiring configurations** are possible—3 and 1 or 2 and 2—utilizing the same components.  
➤ See wiring configurations at right.

**Building-to-panel electrical connections** can be accomplished from power sources in the wall, floor, or ceiling.

➤ See page 40.

**Duplex receptacles** used for both types of configurations are the same. This simplifies specifications and allows a faster understanding of the system.

➤ See page 39.


**Components** used in base wireway applications are also used in mid-wireway applications.

**IMPORTANT: Planning actual power supplies and branch circuits** must be performed by qualified electricians or electrical engineers familiar with the National Electrical Code and the appropriate local codes. The information provided herein is intended to assist specifiers.

**Installations** should be in accordance with the NEC. Local codes may vary. Consult a qualified electrical contractor or engineer for proper installation of electrical equipment.

**All components** are shipped with hardware necessary for installation.

### 3 and 1 (8-wire):

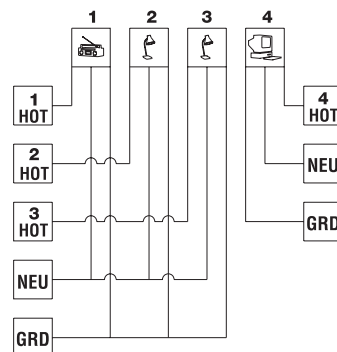


- Three utility circuits share a neutral and common ground.
- One circuit with a DEDICATED hot, neutral and ground.
- Utilize Cetra receptacles #1, 2, 3 for utility and #4 for the DEDICATED ground circuit.

Circuits 1, 2, and 3 can be used for general electrical needs. Customarily, one or more of the circuits is reserved for lighting or other everyday uses, which allows control by central or master switching.

Circuit 4 consists of three separate conductors (hot, neutral, and ground) and meets the BIFMA/ANSI definition for a dedicated circuit.

### 2 and 2 (8-wire):



- Two DESIGNATED utility circuits and two DESIGNATED computer circuits.
- Utilize Cetra receptacles #1 and #2 for the designated utility circuits and receptacles #4 and #5 for the designated computer circuits.

*Note: Receptacle #3 cannot be used in the 2 and 2 configuration. If receptacle #3 is used, possible cross feed or interference from utility circuits one and two can be introduced to computer circuits.*

Circuits 1 and 2 provide a pair of designated circuits for general electrical needs, as described for the 3 & 1.

Circuits 4 and 5 provide a pair of designated circuits for computer applications.

Features	➤ See page 23
Power & Data Overview	38
Enhanced 10-Wire System	43


### Approval/Compliance:

Cetra's electrical system is UL approved, complies with the National Electrical Code (NEC), and is certified for electrical safety to Canadian Standards Association (CSA) standard C22.1 No. 203.  
*Note: Any field modification of the electrical components voids the UL listing.*

### Electrical Service:


Cetra's 8-wire electrical system is rated for 20-amp service. To support the usage, 15-amp convenience receptacles can be placed anywhere along the leg of the electrical connection. In the event that an appliance, such as a larger printer/copier/plotter needs to have a 20-amp receptacle, it is recommended to use a dedicated circuit with a 15/20-amp simplex receptacle. Using 15-amp convenience receptacles will aid in ensuring that no one leg of the system can pull too much current, which could potentially cause the system to trip out and loose power across the entire system.

➤ Contact By Design for details on 20-amp simplex receptacles



The 10-wire configuration supports work environments having heavy intensity, advanced computerized equipment requirements. 10-wire systems include two 12 gauge ground wires, four 12 gauge neutral wires, and four 12 gauge hot wires.

➤ See electrical service info at left.



**Powered panels** feature factory-installed electrical distribution assemblies in the base wireway. Power distribution assemblies can be field-installed on non-powered panels.

➤ See page 39.

**Two wiring configurations** are possible—3 and 3 or 2 and 2—utilizing the same components.

➤ See wiring configurations at right.

**Building-to-panel electrical connections** can be accomplished from power sources in the wall, floor, or ceiling.

➤ See page 40.

**Duplex receptacles** used for both types of configurations are the same. This simplifies specifications and allows a faster understanding of the system.

➤ See page 39.


**Components** used in base wireway applications are also used in mid-wireway applications.

**IMPORTANT: Planning actual power supplies and branch circuits** must be performed by qualified electricians or electrical engineers familiar with the National Electrical Code and the appropriate local codes. The information provided herein is intended to assist specifiers.

**Installations** should be in accordance with the NEC. Local codes may vary. Consult a qualified electrical contractor or engineer for proper installation of electrical equipment.

**All components** are shipped with hardware necessary for installation.

### 3 and 3 (10-wire):




- Three DESIGNATED utility circuits and Three DESIGNATED computer circuits.
- Specify Cetra receptacles #1, #2, and #3 for the designated utility circuits and receptacles #4, #5, and #6 for the designated computer circuits.

Circuits 1, 2, and 3 share a common increased size neutral and ground wire, providing three designated circuits for lighting and other general/utility equipment. Use Kimball Office receptacles AER16, AER26, AER36.

Circuits 4, 5, and 6 share a common increased size neutral and ground wire, providing three designated circuits for computer applications. Use Kimball Office receptacles AER46, AER56, and AER66.

### 2 and 2 (10-wire):

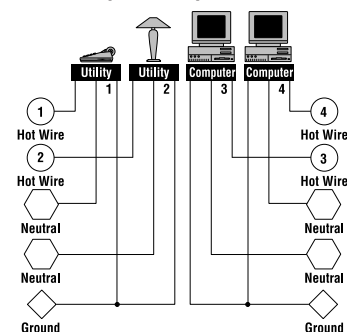

- Two DESIGNATED utility circuits and two DESIGNATED computer circuits.
- Specify Cetra receptacles #1 and #2 for the designated utility circuits and receptacles #3 and #4 for the designated computer circuits.

Circuits 1 and 2 provide a pair of designated circuits for general electrical needs.

Circuits 3 and 4 provide a pair of designated circuits for computer applications.

*Note: The additional two neutral wires featured in the 10-wire system configuration provide an enhanced level of power for installations having higher intensity computer equipment levels.*

Features	➤ See page 23
Power & Data Overview	38
Standard 8-Wire System	42

### Approval/Compliance:

Cetra's electrical system is UL approved, complies with the National Electrical Code (NEC), and is certified for electrical safety to Canadian Standards Association (CSA) standard C22.1 No. 203.

*Note: Any field modification of the electrical components voids the UL listing.*

### Electrical Service:

Cetra's enhanced 10-wire electrical system is rated for 20-amp service. To support the usage, 15-amp convenience receptacles can be placed anywhere along the leg of the electrical connection.

Features	➤ See page 23
Power & Data Overview	38
Standard 8-Wire System	42
Enhanced 10-Wire System	43



**Communication and data cables** can be routed through base and mid-wireways.

**Communication wireway covers** for 30"W or wider panels are available. They are pre-punched to accept data access ports. Only one data opening per wireway cover is available.  
➤ See page 108.

**The opening** is left of center to allow proper clearance. This enables ports to be installed in both sides of the Cetra panel. Opening is 1⅜"H x 2⅛"W. Only one opening per wireway cover is available.



**When purchasing ports commercially**, verify that the depth of port and size of cover are applicable for proper fit. Data ports can be purchased through the port manufacturer or their distribution network.

### L, S, and T Connectors:



Cable capacity when using communication cables is 2 sq. in. **per side** (18 1/4"-diameter cables at 40% fill) for L, S, and T connectors. One sq. in. **per side** of cable capacity (9 1/4"-diameter cables at 40% fill) is available when combining electrical and communication cabling.

### X Connectors:



Due to flow of cable pathway when using "X" connectors (as shown in the illustration above), cable capacity for X connectors is 2 square inches **per connector** when using communication cables only or 1 sq. inch **per connector** when combining electrical and communication cabling.

### Related Products

**Vertical cable managers** are available separately to conceal task light cords.

➤ See page 109 to specify.

## Wireway Cover Punch Options

Options Pricing

Powered and Non-Powered Panels

GSA SIN 711-1

<i>Designator</i>	<i>Description</i>	<i>Price</i>
<b>Standard Panel Punch Options</b>		
<b>P1</b>	1 punched, 1 non-punched	No charge
<b>P2</b>	2 punched	No charge
<b>NP2</b>	2 non-punched	No charge
<b>Mid-Wireway Panel Punch Options</b>		
<b>P3</b>	2 punched, 2 non-punched	No charge
<b>P4</b>	4 punched	No charge
<b>NP4</b>	4 non-punched	No charge

Features	➤ See page 23
Power & Data Overview	38
Standard 8-Wire System	42
Enhanced 10-Wire System	43

### How to Specify

- ① Insert the desired wireway cover designator into your specification.
- See the panel's pricing page for model number, pricing, and how to specify.

# Wireway Cover Punch Options

Options Pricing

Hardwire Panels

GSA SIN 711-1

<i>Designator</i>	<i>Description</i>	<i>Add \$ to Hardwired Panel Price</i>
<b>Standard Hardwire Panel Punch Options</b>		
<b>For Use with Kimball Office Junction Box</b>		
<b>H1</b>	1 H punched, 1 non-punched	No charge
<b>H2</b>	2 H punched	No charge
<b>NP2</b>	2 non-punched	No charge
<b>For Use with Midwest Interstate Junction Box</b>		
<b>C1</b>	1 C punched, 1 non-punched	+\$29
<b>C2</b>	2 C punched	+\$58
<b>Mid-Wireway Hardwire Panel Punch Options</b>		
<b>For Use with Kimball Office Junction Box</b>		
<b>H3</b>	2 H punched, 2 non-punched	No charge
<b>NP4</b>	4 non-punched	No charge
<b>For Use with Midwest Interstate Junction Box</b>		
<b>C3</b>	2 C punched, 2 non-punched	+\$58
<b>C1L</b>	1 C left-hand punched, 1 non-punched	+\$29
<b>C1R</b>	1 C right-hand punched, 1 non-punched	+\$29
<b>C1LR</b>	1 C left-hand punched, 1 C right-hand punched	+\$58
<b>C4</b>	1 C left-hand punched, 1 C right-hand punched, 2 non-punched	+\$58
<b>C2L</b>	2 C left-hand punched, 2 non-punched	+\$58
<b>C2R</b>	2 C right-hand punched, 2 non-punched	+\$58
<b>C2LR</b>	2 C left-hand punched, 2 C right-hand punched	+\$116

H punches are compatible with Kimball Office components.

C punches are compatible with Midwest Interstate components.

For hardwired mid-wireway panels, please use electronic specification tools for accurate pricing.

Features	➤ See page 23
Power & Data Overview	38
Standard 8-Wire System	42
Enhanced 10-Wire System	43

## How to Specify

- ① Insert the desired wireway cover designator into your specification.
- See the panel's pricing page for model number, pricing, and how to specify.

# Acoustical Panels

30" and 37"H

Pricing

GSA SIN 711-1  
COM GSA Non-Contract



				Powered Base Wireway					Non-Powered or Hardwired				
D	W	H	Model	Fabric Price Grade		C	D	E	Fabric Price Grade		C	D	E
				A or COM	B				A or COM	B			
30"H Panels													
25½"	18"	30¾"	AP1830A	\$810	\$834	\$848	\$874	\$910	\$625	\$649	\$663	\$689	\$725
	24"		AP2430A	890	914	928	954	990	705	729	743	769	805
	30"		AP3030A	976	1000	1014	1040	1076	788	812	826	852	888
	36"		AP3630A	1052	1098	1130	1178	1250	864	910	942	990	1062
	42"		AP4230A	1132	1178	1210	1258	1330	943	989	1021	1069	1141
	48"		AP4830A	1207	1253	1285	1333	1405	1023	1069	1101	1149	1221
	60"		AP6030A	1373	1419	1451	1499	1571	1184	1230	1262	1310	1382
37"H Panels													
25½"	18"	37¾"	AP1837A	\$818	\$846	\$866	\$896	\$940	\$627	\$655	\$675	\$705	\$749
	24"		AP2437A	895	923	943	973	1017	707	735	755	785	829
	30"		AP3037A	978	1006	1026	1056	1100	789	817	837	867	911
	36"		AP3637A	1055	1109	1145	1203	1287	867	921	957	1015	1099
	42"		AP4237A	1138	1192	1228	1286	1370	947	1001	1037	1095	1179
	48"		AP4837A	1217	1271	1307	1365	1449	1025	1079	1115	1173	1257
	60"		AP6037A	1376	1430	1466	1524	1608	1190	1244	1280	1338	1422

IMPORTANT: 18"W panels do not accept power entry or receptacles.

When combining fabric grades on a single panel, add side 1 fabric grade price to side 2 fabric grade price, then divide total by 2 to get the average.

Specify electrical jumper cables and receptacles separately.  
➤ See pages 102–108.

Communication Wireway Cover  
➤ See page 108.

Features	➤ See page 23
Product Information	24
Application Guidelines	36
Power & Data Overview	38

## Standard Includes

- Panel
- Top cap
- Wireway covers
- Power distribution assembly, if powered panel is selected
- Attachment brackets

## How to Specify

- 1 Model
- 2 Power option:  
**P** = Powered  
**N** = Non-powered  
**H** = Hardwired
- 3 Top cap material:  
**W** = Wood  
**P** = Paint
- 4 Type of electrical system (omit for non-powered/hardwired):  
**84** = 8-wire, 4-circuit  
**104** = 10-wire, 4-circuit  
**106** = 10-wire, 6-circuit
- 5 Top cap profile:  
**A** = Softened  
**C** = Square  
**T** = Transitional (wood only)
- 6 Top cap finish price group:  
**STD** = Group 1  
**STD M** = Group M (+10%)  
**STD2** = Group 2 (+20%)
- 7 Top cap finish designator
- 8 Wireway cover punch option (omit for 18"W panel):  
➤ See pages 45–46 for designators and upcharges, if applicable.
- 9 Wireway finish price group:  
**STD** = Group 1  
**STD M** = Group M (+10%\*)  
\*Applies once per model.
- 10 Wireway finish designator
- 11 Side 1 fabric grade
- 12 Side 1 fabric number
- 13 Side 2 fabric grade
- 14 Side 2 fabric number



# Acoustical Panels

42" and 50"H

Pricing

GSA SIN 711-1  
COM GSA Non-Contract



				Powered Base Wireway					Non-Powered or Hardwired				
D	W	H	Model	Fabric Price Grade			D	E	Fabric Price Grade			D	E
				A or COM	B	C			A or COM	B	C		
42"H Panels													
25 <sup>5</sup> / <sub>8</sub> "	18"	42 <sup>3</sup> / <sub>8</sub> "	AP1842A	\$820	\$852	\$872	\$904	\$952	\$631	\$663	\$683	\$715	\$763
	24"		AP2442A	902	934	954	986	1034	710	742	762	794	842
	30"		AP3042A	980	1012	1032	1064	1112	790	822	842	874	922
	36"		AP3642A	1057	1119	1161	1225	1321	869	931	973	1037	1133
	42"		AP4242A	1142	1204	1246	1310	1406	952	1014	1056	1120	1216
	48"		AP4842A	1221	1283	1325	1389	1485	1034	1096	1138	1202	1298
	60"		AP6042A	1381	1443	1485	1549	1645	1194	1256	1298	1362	1458
50"H Panels													
25 <sup>5</sup> / <sub>8</sub> "	18"	49 <sup>3</sup> / <sub>8</sub> "	AP1850A	\$845	\$881	\$905	\$943	\$999	\$660	\$696	\$720	\$758	\$814
	24"		AP2450A	926	962	986	1024	1080	738	774	798	836	892
	30"		AP3050A	1008	1044	1068	1106	1162	819	855	879	917	973
	36"		AP3650A	1088	1148	1186	1250	1342	900	960	998	1062	1154
	42"		AP4250A	1169	1237	1281	1351	1455	979	1047	1091	1161	1265
	48"		AP4850A	1246	1318	1366	1442	1554	1056	1128	1176	1252	1364
	60"		AP6050A	1407	1479	1527	1603	1715	1218	1290	1338	1414	1526

IMPORTANT: 18"W panels do not accept power entry or receptacles.

When combining fabric grades on a single panel, add side 1 fabric grade price to side 2 fabric grade price, then divide total by 2 to get the average.

Specify electrical jumper cables and receptacles separately.  
➤ See pages 102–107.

Communication Wireway Cover  
➤ See page 108.

Features	➤ See page 23
Product Information	24
Application Guidelines	36
Power & Data Overview	38

## Standard Includes

- Panel
- Top cap
- Wireway covers
- Power distribution assembly, if powered panel is selected
- Attachment brackets

## How to Specify

- 1 Model
- 2 Power option:  
**P** = Powered  
**N** = Non-powered  
**H** = Hardwired
- 3 Top cap material:  
**W** = Wood  
**P** = Paint
- 4 Type of electrical system (omit for non-powered/hardwired):  
**84** = 8-wire, 4-circuit  
**104** = 10-wire, 4-circuit  
**106** = 10-wire, 6-circuit
- 5 Top cap profile:  
**A** = Softened  
**C** = Square  
**T** = Transitional (wood only)
- 6 Top cap finish price group:  
**STD** = Group 1  
**STD<sub>M</sub>** = Group M (+10%)  
**STD<sub>2</sub>** = Group 2 (+20%)
- 7 Top cap finish designator
- 8 Wireway cover punch option (omit for 18"W panel):  
➤ See pages 45–46 for designators and upcharges, if applicable.
- 9 Wireway finish price group:  
**STD** = Group 1  
**STD<sub>M</sub>** = Group M (+10%\*)  
\*Applies once per model.
- 10 Wireway finish designator
- 11 Side 1 fabric grade
- 12 Side 1 fabric number
- 13 Side 2 fabric grade
- 14 Side 2 fabric number

56" and 61"H

GSA SIN 711-1  
COM GSA Non-Contract



			Powered Base Wireway					Non-Powered or Hardwired					
D	W	H	Model	Fabric Price Grade			D	E	Fabric Price Grade			D	E
				A or COM	B	C			A or COM	B	C		
56"H Panel													
25½"	18"	56¾"	AP1856A	\$867	\$901	\$923	\$959	\$1011	\$677	\$711	\$733	\$769	\$821
	24"		AP2456A	947	989	1015	1059	1123	764	806	832	876	940
	30"		AP3056A	1025	1067	1093	1137	1201	837	879	905	949	1013
	36"		AP3656A	1106	1166	1204	1268	1360	919	979	1017	1081	1173
	42"		AP4256A	1189	1257	1301	1371	1475	998	1066	1110	1180	1284
	48"		AP4856A	1268	1344	1392	1472	1588	1083	1159	1207	1287	1403
	60"		AP6056A	1429	1513	1567	1653	1781	1237	1321	1375	1461	1589
61"H Panel													
25½"	18"	61¾"	AP1861A	\$887	\$921	\$943	\$979	\$1031	\$698	\$732	\$754	\$790	\$842
	24"		AP2461A	967	1009	1035	1079	1143	774	816	842	886	950
	30"		AP3061A	1044	1088	1118	1164	1232	857	901	931	977	1045
	36"		AP3661A	1124	1184	1222	1286	1378	934	994	1032	1096	1188
	42"		AP4261A	1203	1271	1315	1385	1489	1016	1084	1128	1198	1302
	48"		AP4861A	1287	1363	1411	1491	1607	1098	1174	1222	1302	1418
	60"		AP6061A	1446	1534	1592	1684	1820	1257	1345	1403	1495	1631

IMPORTANT: 18"W panels do not accept power entry or receptacles.

When combining fabric grades on a single panel, add side 1 fabric grade price to side 2 fabric grade price, then divide total by 2 to get the average.

Specify electrical jumper cables and receptacles separately.  
➤ See pages 102–107.

Communication Wireway Cover  
➤ See page 108.

Features	➤ See page 23
Product Information	24
Application Guidelines	36
Power & Data Overview	38

### Standard Includes

- Panel
- Top cap
- Wireway covers
- Power distribution assembly, if powered panel is selected
- Attachment brackets

### How to Specify

- 1 Model
- 2 Power option:  
**P** = Powered  
**N** = Non-powered  
**H** = Hardwired
- 3 Top cap material:  
**W** = Wood  
**P** = Paint
- 4 Type of electrical system (omit for non-powered/hardwired):  
**84** = 8-wire, 4-circuit  
**104** = 10-wire, 4-circuit  
**106** = 10-wire, 6-circuit
- 5 Top cap profile:  
**A** = Softened  
**C** = Square  
**T** = Transitional (wood only)
- 6 Top cap finish price group:  
**STD** = Group 1  
**STD M** = Group M (+10%)  
**STD2** = Group 2 (+20%)
- 7 Top cap finish designator
- 8 Wireway cover punch option (omit for 18"W panel):  
➤ See pages 45–46 for designators and upcharges, if applicable.
- 9 Wireway finish price group:  
**STD** = Group 1  
**STD M** = Group M (+10%\*)  
\*Applies once per model.
- 10 Wireway finish designator
- 11 Side 1 fabric grade
- 12 Side 1 fabric number
- 13 Side 2 fabric grade
- 14 Side 2 fabric number

# Acoustical Panels

68" and 80"H

Pricing

GSA SIN 711-1  
COM GSA Non-Contract



				Powered Base Wireway					Non-Powered or Hardwired				
D	W	H	Model	Fabric Price Grade		C	D	E	Fabric Price Grade		C	D	E
				A or COM	B				A or COM	B			
68"H Panels													
25½"	18"	68¾"	AP1868A	\$907	\$941	\$963	\$999	\$1051	\$719	\$753	\$775	\$811	\$863
	24"		AP2468A	985	1027	1053	1097	1161	798	840	866	910	974
	30"		AP3068A	1068	1118	1150	1202	1278	880	930	962	1014	1090
	36"		AP3668A	1147	1207	1245	1309	1401	958	1018	1056	1120	1212
	42"		AP4268A	1231	1299	1343	1413	1517	1041	1109	1153	1223	1327
	48"		AP4868A	1308	1384	1432	1512	1628	1117	1193	1241	1321	1437
	60"		AP6068A	1469	1563	1623	1721	1865	1279	1373	1433	1531	1675
80"H Panels													
25½"	18"	80¾"	AP1880A	\$978	\$1038	\$1076	\$1140	\$1232	\$787	\$847	\$885	\$949	\$1041
	24"		AP2480A	1054	1114	1152	1216	1308	865	925	963	1027	1119
	30"		AP3080A	1135	1195	1233	1297	1389	946	1006	1044	1108	1200
	36"		AP3680A	1211	1329	1405	1527	1707	1024	1142	1218	1340	1520
	42"		AP4280A	1294	1412	1488	1610	1790	1104	1222	1298	1420	1600
	48"		AP4880A	1374	1492	1568	1690	1870	1188	1306	1382	1504	1684
	60"		AP6080A	1536	1654	1730	1852	2032	1343	1461	1537	1659	1839

IMPORTANT: 18"W panels do not accept power entry or receptacles.

When combining fabric grades on a single panel, add side 1 fabric grade price to side 2 fabric grade price, then divide total by 2 to get the average.

Specify electrical jumper cables and receptacles separately.  
➤ See pages 102–107.

Communication Wireway Cover  
➤ See page 108.

Features	➤ See page 23
Product Information	24
Application Guidelines	36
Power & Data Overview	38

## Standard Includes

- Panel
- Top cap
- Wireway covers
- Power distribution assembly, if powered panel is selected
- Attachment brackets

## How to Specify

- Model
- Power option:  
**P** = Powered  
**N** = Non-powered  
**H** = Hardwired
- Top cap material:  
**W** = Wood  
**P** = Paint
- Type of electrical system (omit for non-powered/hardwired):  
**84** = 8-wire, 4-circuit  
**104** = 10-wire, 4-circuit  
**106** = 10-wire, 6-circuit
- Top cap profile:  
**A** = Softened  
**C** = Square  
**T** = Transitional (wood only)
- Top cap finish price group:  
**STD** = Group 1  
**STD M** = Group M (+10%)  
**STD2** = Group 2 (+20%)
- Top cap finish designator
- Wireway cover punch option (omit for 18"W panel):  
➤ See pages 45–46 for designators and upcharges, if applicable.
- Wireway finish price group:  
**STD** = Group 1  
**STD M** = Group M (+10%\*)  
\*Applies once per model.
- Wireway finish designator
- Side 1 fabric grade
- Side 1 fabric number
- Side 2 fabric grade
- Side 2 fabric number

## Combination Panels

30", 37", and 42"H

Pricing

GSA SIN 711-1  
COM GSA Non-Contract



Powered Base Wireway								Non-Powered or Hardwired					
D	W	H	Model	Fabric Price Grade			D	E	Fabric Price Grade			D	E
				A or COM	B	C			A or COM	B	C		
30"H Panels													
25½"	18"	30¾"	AP1830	\$1023	\$1039	\$1049	\$1065	\$1089	\$830	\$846	\$856	\$872	\$896
	24"		AP2430	1103	1124	1137	1159	1191	917	938	951	973	1005
	30"		AP3030	1184	1207	1223	1247	1283	998	1021	1037	1061	1097
	36"		AP3630	1264	1287	1303	1327	1363	1076	1099	1115	1139	1175
	42"		AP4230	1341	1364	1380	1404	1440	1155	1178	1194	1218	1254
	48"		AP4830	1424	1447	1463	1487	1523	1235	1258	1274	1298	1334
37"H Panels													
25½"	18"	37¾"	AP1837	\$1025	\$1041	\$1051	\$1067	\$1091	\$837	\$853	\$863	\$879	\$903
	24"		AP2437	1106	1127	1140	1162	1194	919	940	953	975	1007
	30"		AP3037	1190	1213	1229	1253	1289	1002	1025	1041	1065	1101
	36"		AP3637	1268	1294	1311	1338	1378	1083	1109	1126	1153	1193
	42"		AP4237	1348	1374	1391	1418	1458	1158	1184	1201	1228	1268
	48"		AP4837	1430	1459	1477	1507	1551	1237	1266	1284	1314	1358
42"H Panels													
25½"	18"	42¾"	AP1842	\$1034	\$1050	\$1060	\$1076	\$1100	\$842	\$858	\$868	\$884	\$908
	24"		AP2442	1111	1132	1145	1167	1199	922	943	956	978	1010
	30"		AP3042	1194	1217	1233	1257	1293	1004	1027	1043	1067	1103
	36"		AP3642	1272	1301	1319	1349	1393	1085	1114	1132	1162	1206
	42"		AP4242	1352	1383	1404	1436	1484	1163	1194	1215	1247	1295
	48"		AP4842	1433	1464	1485	1517	1565	1240	1271	1292	1324	1372

IMPORTANT: 18"W panels do not accept power entry or receptacles.

When combining fabric grades on a single panel, add side 1 fabric grade price to side 2 fabric grade price, then divide total by 2 to get the average.

Specify electrical jumper cables and receptacles separately.

➤ See pages 102–107.

Communication Wireway Cover

➤ See page 108.

### Standard Includes

- Panel
- Top cap
- Wireway covers
- Power distribution assembly, if powered panel is selected
- Attachment brackets

### How to Specify

- 1 Model
- 3 Material:  
**WN** = Wood/fabric  
**PN** = Paint/fabric
- 4 Power option:  
**P** = Powered  
**N** = Non-powered  
**H** = Hardwired
- 4 Top cap material:  
**W** = Wood  
**P** = Paint
- 5 Type of electrical system (omit for non-powered/hardwired):  
**84** = 8-wire, 4-circuit  
**104** = 10-wire, 4-circuit  
**106** = 10-wire, 6-circuit
- 6 Top cap profile:  
**A** = Softened  
**C** = Square  
**T** = Transitional (wood only)
- 7 Top cap finish price group:  
**STD** = Group 1  
**STD M** = Group M (+10%)  
**STD2** = Group 2 (+20%)
- 8 Top cap finish designator
- 9 Wireway cover punch option (omit for 18"W panel):  
➤ See pages 45–46 for designators and upcharges, if applicable.
- 10 Wireway finish price group:  
**STD** = Group 1  
**STD M** = Group M (+10%\*)  
\*Applies once per model.
- 11 Wireway finish designator
- 12 Side 1 finish price group:  
**STD** = Group 1  
**STD2** = Group 2 (+20%\*)  
\*Applies once per model.
- 13 Side 1 finish designator
- 14 Side 2 fabric grade
- 15 Side 2 fabric number

## Combination Panels

50", 56", and 61"H

Pricing

GSA SIN 711-1  
COM GSA Non-Contract



Powered Base Wireway									Non-Powered or Hardwired				
D	W	H	Model	Fabric Price Grade					Fabric Price Grade				
				A or COM	B	C	D	E	A or COM	B	C	D	E
50"H Panels													
25½"	18"	49¾"	AP1850	\$1056	\$1072	\$1082	\$1098	\$1122	\$868	\$884	\$894	\$910	\$934
	24"		AP2450	1139	1160	1173	1195	1227	950	971	984	1006	1038
	30"		AP3050	1218	1241	1257	1281	1317	1026	1049	1065	1089	1125
	36"		AP3650	1296	1327	1348	1380	1428	1110	1141	1162	1194	1242
	42"		AP4250	1377	1411	1433	1468	1520	1190	1224	1246	1281	1333
	48"		AP4850	1461	1500	1526	1566	1626	1271	1310	1336	1376	1436
56"H Panels													
25½"	18"	56¾"	AP1856	\$1169	\$1185	\$1195	\$1211	\$1235	\$979	\$995	\$1005	\$1021	\$1045
	24"		AP2456	1246	1267	1280	1302	1334	1056	1077	1090	1112	1144
	30"		AP3056	1328	1351	1367	1391	1427	1139	1162	1178	1202	1238
	36"		AP3656	1407	1438	1459	1491	1539	1218	1249	1270	1302	1350
	42"		AP4256	1489	1525	1549	1587	1643	1296	1332	1356	1394	1450
	48"		AP4856	1565	1604	1630	1670	1730	1377	1416	1442	1482	1542
61"H Panels													
25½"	18"	61¾"	AP1861	\$1188	\$1204	\$1214	\$1230	\$1254	\$996	\$1012	\$1022	\$1038	\$1062
	24"		AP2461	1267	1288	1301	1323	1355	1080	1101	1114	1136	1168
	30"		AP3061	1343	1366	1382	1406	1442	1156	1179	1195	1219	1255
	36"		AP3661	1426	1455	1473	1503	1547	1236	1265	1283	1313	1357
	42"		AP4261	1506	1540	1562	1597	1649	1316	1350	1372	1407	1459
	48"		AP4861	1587	1626	1652	1692	1752	1397	1436	1462	1502	1562

IMPORTANT: 18"W panels do not accept power entry or receptacles.

When combining fabric grades on a single panel, add side 1 fabric grade price to side 2 fabric grade price, then divide total by 2 to get the average.

Specify electrical jumper cables and receptacles separately.

➤ See pages 102–107.

Communication Wireway Cover

➤ See page 108.

### Standard Includes

- Panel
- Top cap
- Wireway covers
- Power distribution assembly, if powered panel is selected
- Attachment brackets

### How to Specify

- 1 Model
- 2 Material:  
**WN** = Wood/fabric  
**PN** = Paint/fabric
- 3 Power option:  
**P** = Powered  
**N** = Non-powered  
**H** = Hardwired
- 4 Top cap material:  
**W** = Wood  
**P** = Paint
- 5 Type of electrical system (omit for non-powered/hardwired):  
**84** = 8-wire, 4-circuit  
**104** = 10-wire, 4-circuit  
**106** = 10-wire, 6-circuit
- 6 Top cap profile:  
**A** = Softened  
**C** = Square  
**T** = Transitional (wood only)
- 7 Top cap finish price group:  
**STD** = Group 1  
**STD M** = Group M (+10%)  
**STD2** = Group 2 (+20%)
- 8 Top cap finish designator
- 9 Wireway cover punch option (omit for 18"W panel):  
➤ See pages 45–46 for designators and upcharges, if applicable.
- 10 Wireway finish price group:  
**STD** = Group 1  
**STD M** = Group M (+10%\*)  
\*Applies once per model.
- 11 Wireway finish designator
- 12 Side 1 finish price group:  
**STD** = Group 1  
**STD2** = Group 2 (+20%\*)  
\*Applies once per model.
- 13 Side 1 finish designator
- 14 Side 2 fabric grade
- 15 Side 2 fabric number

## Combination Panels

68" and 80"H

Pricing

GSA SIN 711-1  
COM GSA Non-Contract



					Powered Base Wireway					Non-Powered or Hardwired				
D	W	H	Model	Fabric Price Grade		C	D	E	Fabric Price Grade		C	D	E	
				A or COM	B				A or COM	B				
68"H Panels														
25⅝"	18"	68⅜"	AP1868	\$1205	\$1221	\$1231	\$1247	\$1271	\$1018	\$1034	\$1044	\$1060	\$1084	
	24"		AP2468	1289	1310	1323	1345	1377	1099	1120	1133	1155	1187	
	30"		AP3068	1370	1396	1413	1440	1480	1178	1204	1221	1248	1288	
	36"		AP3668	1450	1479	1497	1527	1571	1260	1289	1307	1337	1381	
	42"		AP4268	1525	1559	1581	1616	1668	1338	1372	1394	1429	1481	
	48"		AP4868	1608	1647	1673	1713	1773	1422	1461	1487	1527	1587	
80"H Panels														
25⅝"	18"	80⅜"	AP1880	\$1277	\$1334	\$1372	\$1431	\$1519	\$1087	\$1144	\$1182	\$1241	\$1329	
	24"		AP2480	1355	1412	1450	1509	1597	1167	1224	1262	1321	1409	
	30"		AP3080	1435	1492	1530	1589	1677	1241	1298	1336	1395	1483	
	36"		AP3680	1514	1571	1609	1668	1756	1327	1384	1422	1481	1569	
	42"		AP4280	1596	1656	1695	1757	1849	1406	1466	1505	1567	1659	
	48"		AP4880	1675	1735	1774	1836	1928	1485	1545	1584	1646	1738	

**IMPORTANT:** 18"W panels do not accept power entry or receptacles.

When combining fabric grades on a single panel, add side 1 fabric grade price to side 2 fabric grade price, then divide total by 2 to get the average.

Specify electrical jumper cables and receptacles separately.

➤ See pages 102–107.

Communication Wireway Cover

➤ See page 108.

### Standard Includes

- Panel
- Top cap
- Wireway covers
- Power distribution assembly, if powered panel is selected
- Attachment brackets

### How to Specify


- 1 Model
- 3 Material:  
**WN** = Wood/fabric  
**PN** = Paint/fabric
- 4 Power option:  
**P** = Powered  
**N** = Non-powered  
**H** = Hardwired
- 5 Top cap material:  
**W** = Wood  
**P** = Paint
- 5 Type of electrical system (omit for non-powered/hardwired):  
**84** = 8-wire, 4-circuit  
**104** = 10-wire, 4-circuit  
**106** = 10-wire, 6-circuit
- 6 Top cap profile:  
**A** = Softened  
**C** = Square  
**T** = Transitional (wood only)
- 7 Top cap finish price group:  
**STD** = Group 1  
**STD M** = Group M (+10%)  
**STD2** = Group 2 (+20%)
- 8 Top cap finish designator
- 9 Wireway cover punch option (omit for 18"W panel):  
➤ See pages 45–46 for designators and upcharges, if applicable.
- 10 Wireway finish price group:  
**STD** = Group 1  
**STD M** = Group M (+10%\*)  
\*Applies once per model.
- 11 Wireway finish designator
- 12 Side 1 finish price group:  
**STD** = Group 1  
**STD2** = Group 2 (+20%\*)  
\*Applies once per model.
- 13 Side 1 finish designator
- 14 Side 2 fabric grade
- 15 Side 2 fabric number

## Mid-Wireway Panels

42", 50", and 56"H

Pricing

GSA SIN 711-1  
COM GSA Non-Contract



Powered Base Wireway									Hardwired				
D	W	H	Model	Fabric Price Grade			D	E	Fabric Price Grade			D	E
				A or COM	B	C			A or COM	B	C		
42"H Panels													
25½"	18"	42¾"	AP1842M	\$1199	\$1231	\$1251	\$1283	\$1331	—	—	—	—	—
	24"		AP2442M	1278	1310	1330	1362	1410	\$1088	\$1120	\$1140	\$1172	\$1220
	30"		AP3042M	1362	1394	1414	1446	1494	1169	1201	1221	1253	1301
	36"		AP3642M	1436	1498	1540	1604	1700	1246	1308	1350	1414	1510
	42"		AP4242M	1516	1578	1620	1684	1780	1328	1390	1432	1496	1592
	48"		AP4842M	1597	1659	1701	1765	1861	1407	1469	1511	1575	1671
	60"		AP6042M	1757	1819	1861	1925	2021	1565	1627	1669	1733	1829
50"H Panels													
25½"	18"	49¾"	AP1850M	\$1227	\$1261	\$1283	\$1319	\$1371	—	—	—	—	—
	24"		AP2450M	1305	1341	1365	1403	1459	\$1112	\$1148	\$1172	\$1210	\$1266
	30"		AP3050M	1383	1419	1443	1481	1537	1196	1232	1256	1294	1350
	36"		AP3650M	1466	1526	1564	1628	1720	1277	1337	1375	1439	1531
	42"		AP4250M	1546	1614	1658	1728	1832	1355	1423	1467	1537	1641
	48"		AP4850M	1640	1712	1760	1836	1948	1435	1507	1555	1631	1743
	60"		AP6050M	1787	1859	1907	1983	2095	1596	1668	1716	1792	1904
56"H Panels													
25½"	18"	56¾"	AP1856M	\$1240	\$1274	\$1296	\$1332	\$1384	—	—	—	—	—
	24"		AP2456M	1323	1365	1391	1435	1499	\$1135	\$1177	\$1203	\$1247	\$1311
	30"		AP3056M	1404	1446	1472	1516	1580	1211	1253	1279	1323	1387
	36"		AP3656M	1484	1544	1582	1646	1738	1294	1354	1392	1456	1548
	42"		AP4256M	1562	1630	1674	1744	1848	1374	1442	1486	1556	1660
	48"		AP4856M	1646	1722	1770	1850	1966	1456	1532	1580	1660	1776
	60"		AP6056M	1801	1885	1939	2025	2153	1617	1701	1755	1841	1969

IMPORTANT: 18"W panels do not accept power entry or receptacles.

When combining fabric grades on a single panel, add side 1 fabric grade price to side 2 fabric grade price, then divide total by 2 to get the average.

Specify power distribution for mid-wireway separately.

Specify electrical jumper cables and receptacles for base and mid-wireway separately.

➤ See pages 102–107.

Communication Wireway Cover

➤ See page 108.

Features	➤ See page 23
Product Information	25
Application Guidelines	36
Power & Data Overview	38

### Standard Includes

- Panel
- Top cap
- Wireway covers
- Base wireway power distribution assembly
- Attachment brackets

### How to Specify

- 1 Model
- 2 Power option:  
P = Powered  
H = Hardwired
- 3 Top cap material:  
W = Wood  
P = Paint
- 4 Type of electrical system (omit for hardwired):  
84 = 8-wire, 4-circuit  
104 = 10-wire, 4-circuit  
106 = 10-wire, 6-circuit
- 5 Top cap profile:  
A = Softened  
C = Square  
T = Transitional (wood only)
- 6 Top cap finish price group:  
STD = Group 1  
STD<sub>M</sub> = Group M (+10%)  
STD<sub>2</sub> = Group 2 (+20%)
- 7 Top cap finish designator
- 8 Wireway cover punch option (omit for 18"W panel):  
➤ See pages 45–46 for designators and upcharges, if applicable.
- 9 Wireway finish price group:  
STD = Group 1  
STD<sub>M</sub> = Group M (+10%\*)  
\*Applies once per model.
- 10 Wireway finish designator
- 11 Side 1 fabric grade
- 12 Side 1 fabric number
- 13 Side 2 fabric grade
- 14 Side 2 fabric number




## Mid-Wireway Panels

61"H, 68"H, and 80"H

Pricing

GSA SIN 711-1  
COM GSA Non-Contract



**IMPORTANT:** 18"W panels do not accept power entry or receptacles.

When combining fabric grades on a single panel, add side 1 fabric grade price to side 2 fabric grade price, then divide total by 2 to get the average.

Specify power distribution for mid-wireway separately.

Specify electrical jumper cables and receptacles for base and mid-wireway separately.

➤ See pages 102–107.

Communication Wireway Cover

➤ See page 108.

### Powered Base Wireway

Fabric Price Grade  
A or COM B C D E

### Non-Powered or Hardwired

Fabric Price Grade  
A or COM B C D E

D	W	H	Model	A or COM	B	C	D	E	A or COM	B	C	D	E
<b>61"H Panels</b>													
25½"	18"	61¾"	<b>AP1861M</b>	\$1263	\$1297	\$1319	\$1355	\$1407	—	—	—	—	—
	24"		<b>AP2461M</b>	1339	1381	1407	1451	1515	\$1154	\$1196	\$1222	\$1266	\$1330
	30"		<b>AP3061M</b>	1423	1467	1497	1543	1611	1234	1278	1308	1354	1422
	36"		<b>AP3661M</b>	1504	1564	1602	1666	1758	1311	1371	1409	1473	1565
	42"		<b>AP4261M</b>	1582	1650	1694	1764	1868	1393	1461	1505	1575	1679
	48"		<b>AP4861M</b>	1661	1737	1785	1865	1981	1472	1548	1596	1676	1792
	60"		<b>AP6061M</b>	1821	1909	1967	2059	2195	1628	1716	1774	1866	2002
<b>68"H Panels</b>													
25½"	18"	68¾"	<b>AP1868M</b>	\$1285	\$1319	\$1341	\$1377	\$1429	—	—	—	—	—
	24"		<b>AP2468M</b>	1368	1410	1436	1480	1544	\$1175	\$1217	\$1243	\$1287	\$1351
	30"		<b>AP3068M</b>	1441	1491	1523	1575	1651	1253	1303	1335	1387	1463
	36"		<b>AP3668M</b>	1522	1582	1620	1684	1776	1336	1396	1434	1498	1590
	42"		<b>AP4268M</b>	1603	1671	1715	1785	1889	1415	1483	1527	1597	1701
	48"		<b>AP4868M</b>	1685	1761	1809	1889	2005	1494	1570	1618	1698	1814
	60"		<b>AP6068M</b>	1841	1935	1995	2093	2237	1656	1750	1810	1908	2052
<b>80"H Panels</b>													
25½"	18"	80¾"	<b>AP1880M</b>	\$1348	\$1408	\$1446	\$1510	\$1602	—	—	—	—	—
	24"		<b>AP2480M</b>	1432	1492	1530	1594	1686	\$1238	\$1298	\$1336	\$1400	\$1492
	30"		<b>AP3080M</b>	1511	1571	1609	1673	1765	1322	1382	1420	1484	1576
	36"		<b>AP3680M</b>	1593	1711	1787	1909	2089	1403	1521	1597	1719	1899
	42"		<b>AP4280M</b>	1672	1790	1866	1988	2168	1482	1600	1676	1798	1978
	48"		<b>AP4880M</b>	1753	1871	1947	2069	2249	1561	1679	1755	1877	2057
	60"		<b>AP6080M</b>	1909	2027	2103	2225	2405	1720	1838	1914	2036	2216

Features	➤ See page 23
Product Information	25
Application Guidelines	36
Power & Data Overview	38

### Standard Includes

- Panel
- Top cap
- Wireway covers
- Base wireway power distribution assembly
- Attachment brackets


### How to Specify

- 1 Model
- 2 Power option:  
P = Powered  
H = Hardwired
- 3 Top cap material:  
W = Wood  
P = Paint
- 4 Type of electrical system (omit for hardwired):  
84 = 8-wire, 4-circuit  
104 = 10-wire, 4-circuit  
106 = 10-wire, 6-circuit
- 5 Top cap profile:  
A = Softened  
C = Square  
T = Transitional (wood only)
- 6 Top cap finish price group:  
STD = Group 1  
STD M = Group M (+10%)  
STD2 = Group 2 (+20%)
- 7 Top cap finish designator
- 8 Wireway cover punch option (omit for 18"W panel):  
➤ See pages 45–46 for designators and upcharges, if applicable.
- 9 Wireway finish price group:  
STD = Group 1  
STD M = Group M (+10%\*)  
\*Applies once per model.
- 10 Wireway finish designator
- 11 Side 1 fabric grade
- 12 Side 1 fabric number
- 13 Side 2 fabric grade
- 14 Side 2 fabric number

# Ceiling Power Entry Panels

## Pricing

GSA SIN 711-1  
COM GSA Non-Contract



					Powered Base Wireway					Non-Powered or Hardwired				
D	W	H	Model	Fabric Price Grade		C	D	E	Fabric Price Grade		C	D	E	
				A or COM	B				A or COM	B				
68"H Panels														
25½"	30"	68¾"	AP3068V	\$1512	\$1562	\$1594	\$1646	\$1722	\$1323	\$1373	\$1405	\$1457	\$1533	
	36"		AP3668V	1595	1655	1693	1757	1849	1404	1464	1502	1566	1658	
	42"		AP4268V	1628	1696	1740	1810	1914	1442	1510	1554	1624	1728	
	48"		AP4868V	1710	1786	1834	1914	2030	1526	1602	1650	1730	1846	
80"H Panels														
25½"	30"	80¾"	AP3080V	\$1576	\$1634	\$1670	\$1730	\$1818	\$1392	\$1450	\$1486	\$1546	\$1634	
	36"		AP3680V	1660	1774	1850	1968	2144	1471	1585	1661	1779	1955	
	42"		AP4280V	1694	1812	1888	2010	2190	1553	1671	1747	1869	2049	
	48"		AP4880V	1759	1877	1953	2075	2255	1628	1746	1822	1944	2124	

IMPORTANT: 18"W panels do not accept power entry or receptacles.

When combining fabric grades on a single panel, add side 1 fabric grade price to side 2 fabric grade price, then divide total by 2 to get the average.

Specify electrical jumper cables and receptacles separately.  
➤ See pages 102–107.

Specify ceiling power entry assembly separately.  
➤ See pages 103 and 105.

Communication Wireway Cover  
➤ See page 108.

Features	➤ See page 23
Product Information	26
Application Guidelines	36
Power & Data Overview	38

## Standard Includes

- Panel
- Divided top cap for power pole
- Power pole
- Wireway covers
- Power distribution assembly, if powered panel is selected
- Attachment brackets

## How to Specify

- 1 Model
- 2 Power option:  
P = Powered  
N = Non-powered  
H = Hardwired
- 3 Top cap material:  
W = Wood  
P = Paint
- 4 Type of electrical system (omit for non-powered/hardwired):  
84 = 8-wire, 4-circuit  
104 = 10-wire, 4-circuit  
106 = 10-wire, 6-circuit
- 5 Top cap profile:  
A = Softened  
C = Square  
T = Transitional (wood only)
- 6 Top cap finish price group:  
STD = Group 1  
STD<sub>M</sub> = Group M (+10%)  
STD<sub>2</sub> = Group 2 (+20%)
- 7 Top cap finish designator
- 8 Wireway cover punch option:  
➤ See pages 45–46 for designators and upcharges, if applicable.
- 9 Wireway finish price group:  
STD = Group 1  
STD<sub>M</sub> = Group M (+10%\*)  
\*Applies once per model.
- 10 Wireway/power pole finish design.
- 11 Side 1 fabric grade
- 12 Side 1 fabric number
- 13 Side 2 fabric grade
- 14 Side 2 fabric number

## Full Glass Panels

Pricing

GSA SIN 711-1



				Powered Base Wireway	Non-Powered or Hardwired
D	W	H	Model	Price	Price
61"H Panels					
25½"	24"	61¾"	AP2461G	\$1681	\$1491
	30"		AP3061G	1681	1491
	36"		AP3661G	1758	1567
68"H Panels					
25½"	24"	68¾"	AP2468G	\$1700	\$1512
	30"		AP3068G	1700	1512
	36"		AP3668G	1784	1595
80"H Panels					
25½"	24"	80¾"	AP2480G	\$1769	\$1576
	30"		AP3080G	1769	1576
	36"		AP3680G	1850	1660

Specify electrical jumper cables and receptacles separately.

➤ See pages 102–107.

Communication Wireway Cover

➤ See page 108.

### Standard Includes

- Panel
- Top cap
- Wireway covers
- Power distribution assembly, if powered panel is selected
- Attachment brackets


### How to Specify

- 1 Model
- 2 Frame material:  
**N** = Fabric  
**P** = Paint  
**W** = Wood
- 3 Power option:  
**P** = Powered  
**N** = Non-powered  
**H** = Hardwired
- 4 Top cap material:  
**W** = Wood  
**P** = Paint
- 5 Glass option:  
**3** = Clear
- 6 Type of electrical system (omit for non-powered/hardwired):  
**84** = 8-wire, 4-circuit  
**104** = 10-wire, 4-circuit  
**106** = 10-wire, 6-circuit
- 7 Top cap profile:  
**A** = Softened **C** = Square  
**T** = Transitional (wood only)
- 8 Top cap finish price group:  
**STD** = Group 1  
**STDM** = Group M (+10%)  
**STD2** = Group 2 (+20%)
- 9 Top cap finish designator
- 10 Wireway cover punch option:  
➤ See pages 45–46 for designators and upcharges, if applicable.
- 11 Wireway finish price group:  
**STD** = Group 1  
**STDM** = Group M (+10%\*)
- 12 Wireway finish designator
- 13 Frame finish price group:  
If wood or paint: **STD**, **STDM** (+10%\*), **STD2** (+20%\*),  
\*Applies once per model.  
If fabric: fabric grade
- 14 Frame finish designator or fabric number

## Partial Glass Panels

Pricing

GSA SIN 711-1



D	W	H	Model	Powered Base Wireway					Non-Powered or Hardwired				
				Fabric Price Grade					Fabric Price Grade				
				A or COM	B	C	D	E	A or COM	B	C	D	E
<b>61"H Panels</b>													
25½"	30"	61⅜"	<b>AP3061H</b>	\$1904	\$1928	\$1942	\$1968	\$2004	\$1711	\$1735	\$1749	\$1775	\$1811
	36"		<b>AP3661H</b>	1981	2033	2067	2121	2201	1792	1844	1878	1932	2012
	42"		<b>AP4261H</b>	2065	2117	2151	2205	2285	1873	1925	1959	2013	2093
<b>68"H Panels</b>													
25½"	30"	68⅜"	<b>AP3068H</b>	\$1925	\$1949	\$1963	\$1989	\$2025	\$1736	\$1760	\$1774	\$1800	\$1836
	36"		<b>AP3668H</b>	2006	2058	2092	2146	2226	1817	1869	1903	1957	2037
	42"		<b>AP4268H</b>	2086	2138	2172	2226	2306	1893	1945	1979	2033	2113

Specify electrical jumper cables and receptacles separately.

Partial glass panel lower section is 29" high and available in fabric only.

When combining fabric grades on a single panel, add side 1 fabric grade price to side 2 fabric grade price, then divide total by 2 to get the average.

Electrical Components  
➤ See pages 102–107.

Communication Wireway Cover  
➤ See page 108.

### Standard Includes

- Panel
- Top cap
- Wireway covers
- Power distribution assembly, if powered panel is selected
- Attachment brackets

### How to Specify


- 1 Model
- 2 Frame material:  
**N** = Fabric  
**P** = Paint  
**W** = Wood
- 3 Power option:  
**P** = Powered  
**N** = Non-powered  
**H** = Hardwired
- 4 Top cap material:  
**W** = Wood **P** = Paint
- 5 Glass option: **3** = Clear
- 6 Type of electrical system (omit for non-powered/hardwired):  
**84** = 8-wire, 4-circuit  
**104** = 10-wire, 4-circuit  
**106** = 10-wire, 6-circuit
- 7 Top cap profile:  
**A** = Softened  
**C** = Square  
**T** = Transitional (wood only)
- 8 Top cap finish price group:  
**STD** = Group 1  
**STD<sub>M</sub>** = Group M (+10%)  
**STD<sub>2</sub>** = Group 2 (+20%)
- 9 Top cap finish designator
- 10 Wireway cover punch option:  
➤ See pages 45–46 for designators and upcharges, if applicable.
- 11 Wireway finish price group:  
**STD** = Group 1  
**STD<sub>M</sub>** = Group M (+10%\*)
- 12 Wireway finish designator
- 13 Frame finish price group:  
If wood or paint: **STD**, **STD<sub>M</sub>** (+10%\*), **STD<sub>2</sub>** (+20%\*),  
\*Applies once per model.  
If fabric: fabric grade
- 14 Frame finish design. or fabric number
- 15 Side 1 fabric grade
- 16 Side 1 fabric number
- 17 Side 2 fabric grade
- 18 Side 2 fabric number

# Sectional Panel Frames

30", 37", and 42"H Frames

Pricing

GSA SIN 711-1



				Powered Base Wireway	Non-Powered or Hardwired
D	W	H	Model	Price	Price
30"H Panels					
25½"	18"	30¾"	AF1830S	\$658	\$471
	24"		AF2430S	699	511
	30"		AF3030S	741	557
	36"		AF3630S	808	626
	42"		AF4230S	865	680
	48"		AF4830S	922	736
37"H Panels					
25½"	18"	37¾"	AF1837S	\$674	\$481
	24"		AF2437S	710	520
	30"		AF3037S	761	569
	36"		AF3637S	823	638
	42"		AF4237S	886	698
	48"		AF4837S	941	753
42"H Panels					
25½"	18"	42¾"	AF1842S	\$678	\$492
	24"		AF2442S	726	533
	30"		AF3042S	786	593
	36"		AF3642S	842	655
	42"		AF4242S	903	711
	48"		AF4842S	965	773

IMPORTANT: 18"W panels do not accept power entry or receptacles.

Tiles are specified separately.  
➤ See pages 62–63.

Specify electrical jumper cables and receptacles separately.  
➤ See pages 102–107.

Communication Wireway Cover  
➤ See page 108.

Features	➤ See page 23
Product Information	28
Application Guidelines	36
Power & Data Overview	38

## Standard Includes

- Panel frame
- Top cap
- Wireway covers
- Power distribution assembly, if powered panel is selected
- Attachment brackets

## How to Specify

- 1 Model
- 2 Power option:  
**P** = Powered  
**N** = Non-powered  
**H** = Hardwired
- 3 Top cap material:  
**W** = Wood  
**P** = Paint
- 4 Type of electrical system (omit for non-powered/hardwired):  
**84** = 8-wire, 4-circuit  
**104** = 10-wire, 4-circuit  
**106** = 10-wire, 6-circuit
- 5 Top cap profile:  
**A** = Softened  
**C** = Square  
**T** = Transitional (wood only)
- 6 Top cap finish price group:  
**STD** = Group 1  
**STD<sub>M</sub>** = Group M (+10%)  
**STD<sub>2</sub>** = Group 2 (+20%)
- 7 Top cap finish designator
- 8 Wireway cover punch option (omit for 18"W panel):  
➤ See pages 45–46 for designators and upcharges, if applicable.
- 9 Wireway finish price group:  
**STD** = Group 1  
**STD<sub>M</sub>** = Group M (+10%\*)  
\*Applies once per model.
- 10 Wireway finish designator

# Sectional Panel Frames

50", 56", and 61"H Frames

Pricing

GSA SIN 711-1



				Powered Base Wireway	Non-Powered or Hardwired
D	W	H	Model	Price	Price
50"H Panels					
25½"	18"	49¾"	AF1850S	\$680	\$499
	24"		AF2450S	741	555
	30"		AF3050S	803	613
	36"		AF3650S	864	675
	42"		AF4250S	922	733
	48"		AF4850S	982	795
56"H Panels					
25½"	18"	56¾"	AF1856S	\$699	\$509
	24"		AF2456S	761	569
	30"		AF3056S	818	627
	36"		AF3656S	876	692
	42"		AF4256S	935	750
	48"		AF4856S	998	808
61"H Panels					
25½"	18"	61¾"	AF1861S	\$710	\$520
	24"		AF2461S	772	584
	30"		AF3061S	832	640
	36"		AF3661S	890	705
	42"		AF4261S	952	766
	48"		AF4861S	1011	822

IMPORTANT: 18"W panels do not accept power entry or receptacles.

Tiles are specified separately.  
➤ See pages 62–63.

Specify electrical jumper cables and receptacles separately.  
➤ See pages 102–107.

Communication Wireway Cover  
➤ See page 108.

Features	➤ See page 23
Product Information	28
Application Guidelines	36
Power & Data Overview	38

## Standard Includes

- Panel frame
- Top cap
- Wireway covers
- Power distribution assembly, if powered panel is selected
- Attachment brackets

## How to Specify

- Model
- Power option:  
**P** = Powered  
**N** = Non-powered  
**H** = Hardwired
- Top cap material:  
**W** = Wood  
**P** = Paint
- Type of electrical system (omit for non-powered/hardwired):  
**84** = 8-wire, 4-circuit  
**104** = 10-wire, 4-circuit  
**106** = 10-wire, 6-circuit
- Top cap profile:  
**A** = Softened  
**C** = Square  
**T** = Transitional (wood only)
- Top cap finish price group:  
**STD** = Group 1  
**STD<sub>M</sub>** = Group M (+10%)  
**STD<sub>2</sub>** = Group 2 (+20%)
- Top cap finish designator
- Wireway cover punch option (omit for 18"W panel):  
➤ See pages 45–46 for designators and upcharges, if applicable.
- Wireway finish price group:  
**STD** = Group 1  
**STD<sub>M</sub>** = Group M (+10%\*)  
\*Applies once per model.
- Wireway finish designator

# Sectional Panel Frames

68" and 80"H Frames

Pricing

GSA SIN 711-1  
COM GSA Non-Contract



				Powered Base Wireway	Non-Powered or Hardwired
<i>D</i>	<i>W</i>	<i>H</i>	<i>Model</i>	<i>Price</i>	<i>Price</i>
68"H Panels					
25½"	18"	68¾"	AF1868S	\$728	\$536
	24"		AF2468S	788	597
	30"		AF3068S	845	660
	36"		AF3668S	914	726
	42"		AF4268S	970	777
	48"		AF4868S	1025	837
80"H Panels					
25½"	18"	80¾"	AF1880S	\$777	\$588
	24"		AF2480S	837	646
	30"		AF3080S	900	708
	36"		AF3680S	958	771
	42"		AF4280S	1018	830
	48"		AF4880S	1083	889

IMPORTANT: 18"W panels do not accept power entry or receptacles.

Tiles are specified separately.  
➤ See pages 62–63.

Specify electrical jumper cables and receptacles separately.  
➤ See pages 102–107.

Communication Wireway Cover  
➤ See page 108.

Features	➤ See page 23
Product Information	28
Application Guidelines	36
Power & Data Overview	38

## Standard Includes

- Panel frame
- Top cap
- Wireway covers
- Power distribution assembly, if powered panel is selected
- Attachment brackets

## How to Specify

- 1 Model
- 3 Power option:  
**P** = Powered  
**N** = Non-powered  
**H** = Hardwired
- 4 Top cap material:  
**W** = Wood  
**P** = Paint
- 4 Type of electrical system (omit for non-powered/hardwired):  
**84** = 8-wire, 4-circuit  
**104** = 10-wire, 4-circuit  
**106** = 10-wire, 6-circuit
- 5 Top cap profile:  
**A** = Softened  
**C** = Square  
**T** = Transitional (wood only)
- 6 Top cap finish price group:  
**STD** = Group 1  
**STD M** = Group M (+10%)  
**STD2** = Group 2 (+20%)
- 7 Top cap finish designator
- 8 Wireway cover punch option (omit for 18"W panel):  
➤ See pages 45–46 for designators and upcharges, if applicable.
- 9 Wireway finish price group:  
**STD** = Group 1  
**STD M** = Group M (+10%\*)  
\*Applies once per model.
- 10 Wireway finish designator



## Fabric Tiles

For Use with Sectional Panel Frames

## Pricing

GSA SIN 711-1  
COM GSA Non-Contract

<i>D</i>	<i>W</i>	<i>H</i>	<i>Model</i>	<b>Fabric Price Grade</b>				
				<i>A or COM</i>	<i>B</i>	<i>C</i>	<i>D</i>	<i>E</i>
<b>7"H Fabric Tiles</b>								
1½"	17¾"	6¾"	<b>AI1807N</b>	\$95	\$105	\$112	\$123	\$139
	23¾"		<b>AI2407N</b>	105	115	122	133	149
	29¾"		<b>AI3007N</b>	116	126	133	144	160
	35¾"		<b>AI3607N</b>	127	137	144	155	171
	41¾"		<b>AI4207N</b>	146	156	163	174	190
	47¾"		<b>AI4807N</b>	170	180	187	198	214
<b>12"H Fabric Tiles</b>								
1½"	17¾"	11¾"	<b>AI1812N</b>	\$100	\$113	\$122	\$135	\$155
	23¾"		<b>AI2412N</b>	109	122	131	144	164
	29¾"		<b>AI3012N</b>	123	136	145	158	178
	35¾"		<b>AI3612N</b>	137	150	159	172	192
	41¾"		<b>AI4212N</b>	154	167	176	189	209
	47¾"		<b>AI4812N</b>	172	185	194	207	227
<b>19"H Fabric Tiles</b>								
1½"	17¾"	18¾"	<b>AI1819N</b>	\$100	\$118	\$130	\$149	\$177
	23¾"		<b>AI2419N</b>	109	127	139	158	186
	29¾"		<b>AI3019N</b>	123	141	153	172	200
	35¾"		<b>AI3619N</b>	137	155	167	186	214
	41¾"		<b>AI4219N</b>	154	172	184	203	231
	47¾"		<b>AI4819N</b>	172	190	202	221	249
<b>24"H Fabric Tiles</b>								
1½"	17¾"	24 <sup>7</sup> / <sub>16</sub> "	<b>AI1824N</b>	\$116	\$139	\$155	\$179	\$215
	23¾"		<b>AI2424N</b>	127	150	166	190	226
	29¾"		<b>AI3024N</b>	140	163	179	203	239
	35¾"		<b>AI3624N</b>	158	181	197	221	257
	41¾"		<b>AI4224N</b>	177	200	216	240	276
	47¾"		<b>AI4824N</b>	194	217	233	257	293

IMPORTANT: Tiles must be specified for both sides of panel frame.

Tiles are non-acoustical and non-tackable.

➤ See page 28 for tile application guidelines

Sectional Panel Frames

➤ See pages 59–61.

Features	➤ See page 23
Product Information	28
Application Guidelines	36
Power & Data Overview	38

### Standard Includes

- Tile: fabric

### How to Specify


- ① Model
- ② Fabric grade
- ③ Fabric number

# Slat, Glass, Ventilated, Wood, & Painted Tiles

Pricing

For Use with Sectional Panel Frames

GSA SIN 711-1



D	W	H	Model	Slat	Glass	Ventilated	Wood	Painted
<b>7"H Tiles</b>								
1/2"	17 3/4"	6 3/4"	<b>AI1807</b>	—	\$172	\$166	\$168	\$101
	23 3/4"		<b>AI2407</b>	—	172	166	189	110
	29 3/4"		<b>AI3007</b>	—	185	174	240	125
	35 3/4"		<b>AI3607</b>	—	196	188	269	140
	41 3/4"		<b>AI4207</b>	—	218	204	303	158
	47 3/4"		<b>AI4807</b>	—	236	226	316	177
<b>12"H Tiles</b>								
1/2"	17 3/4"	11 3/4"	<b>AI1812</b>	—	\$174	\$170	\$171	\$106
	23 3/4"		<b>AI2412</b>	\$483	174	170	194	122
	29 3/4"		<b>AI3012</b>	557	187	177	242	130
	35 3/4"		<b>AI3612</b>	557	204	195	273	146
	41 3/4"		<b>AI4212</b>	561	223	209	305	168
	47 3/4"		<b>AI4812</b>	561	240	231	320	183
<b>19"H Tiles</b>								
1/2"	17 3/4"	18 3/4"	<b>AI1819</b>	—	\$174	\$170	\$171	\$106
	23 3/4"		<b>AI2419</b>	\$542	174	170	194	122
	29 3/4"		<b>AI3019</b>	542	187	177	242	130
	35 3/4"		<b>AI3619</b>	619	204	195	273	146
	41 3/4"		<b>AI4219</b>	622	223	209	305	168
	47 3/4"		<b>AI4819</b>	690	240	231	320	183
<b>24"H Tiles</b>								
1/2"	17 3/4"	24 7/16"	<b>AI1824</b>	—	\$190	\$183	\$179	\$125
	23 3/4"		<b>AI2424</b>	—	190	183	234	135
	29 3/4"		<b>AI3024</b>	—	204	195	273	150
	35 3/4"		<b>AI3624</b>	—	226	216	305	171
	41 3/4"		<b>AI4224</b>	—	242	233	348	188
	47 3/4"		<b>AI4824</b>	—	268	256	371	208

Glass tiles cannot be used in a 30"H sectional panel frame.

Tiles must be specified for both sides of panel frame.

Slat tiles are only available in 12" and 19" height. One single monitor arm can be accommodated per slat tile.

Sectional Panel Frames  
➤ See Pages 59 – 61.

Work Tools and Monitor Arms for Slat Wall Tiles  
➤ See the Perks Price List

Features	➤ See page 23
Product Information	28
Application Guidelines	36
Power & Data Overview	38

## Standard Includes

- Tile

## How to Specify

### Slat, Ventilated, Wood and Painted Tiles

- Model
- Type of tile:  
**SS** = Slat  
**V1** = Ventilated  
**W** = Wood  
**P** = Paint
- Finish price group:  
**STD** = Group 1  
**STD M** = Group M (+10%)  
**STD2** = Group 2 (+20%)  
*Note: Metallic paints are not available on painted tiles.*
- Finish designator

### Glass Tiles

- Model
- Type of tile:  
**G** = Glass
- Glass option:  
**3** = Clear  
**9** = Frosted (not available on 7"H tiles) (+10% upcharge)
- Frame finish price group:  
**STD** = Group 1  
**STD M** = Group M (+10%)
- Frame finish designator

# Stackable Acoustical & Combination Panels

Pricing

GSA SIN 711-1



**Acoustical (Fabric)**

Fabric Price Grade  
A or COM B C D E



**Combination**

Fabric Price Grade  
A or COM B C D E

D	W	H	Model	A	B	C	D	E	A	B	C	D	E
<b>7"H Panels</b>													
25½"	18"	6¾"	<b>AP1807</b>	\$265	\$273	\$277	\$287	\$299	\$439	\$447	\$452	\$460	\$472
	24"		<b>AP2407</b>	280	288	292	302	314	464	472	477	485	497
	30"		<b>AP3007</b>	286	304	316	336	364	471	479	484	492	504
	36"		<b>AP3607</b>	297	315	327	347	375	491	499	504	512	524
	42"		<b>AP4207</b>	316	334	346	366	394	517	525	530	538	550
	48"		<b>AP4807</b>	319	337	349	369	397	526	534	539	547	559
	60"		<b>AP6007</b>	354	372	384	404	432	—	—	—	—	—
<b>12"H Panels</b>													
25½"	18"	11¾"	<b>AP1812</b>	\$341	355	\$363	\$377	\$397	\$562	\$575	\$584	\$597	\$617
	24"		<b>AP2412</b>	360	374	382	396	416	591	604	613	626	646
	30"		<b>AP3012</b>	367	391	405	431	467	604	617	626	639	659
	36"		<b>AP3612</b>	374	398	412	438	474	616	629	638	651	671
	42"		<b>AP4212</b>	394	418	432	458	494	650	663	672	685	705
	48"		<b>AP4812</b>	401	425	439	465	501	660	673	682	695	715
	60"		<b>AP6012</b>	447	471	485	511	547	—	—	—	—	—
<b>19"H Panels</b>													
25½"	18"	18¾"	<b>AP1819</b>	\$382	\$400	\$412	\$432	\$460	\$627	\$645	\$657	\$676	\$704
	24"		<b>AP2419</b>	402	420	432	452	480	660	678	690	709	737
	30"		<b>AP3019</b>	416	442	460	486	526	688	706	718	737	765
	36"		<b>AP3619</b>	432	464	484	516	564	710	728	740	759	787
	42"		<b>AP4219</b>	447	481	503	539	591	738	756	768	787	815
	48"		<b>AP4819</b>	454	494	518	560	620	746	764	776	795	823
	60"		<b>AP6019</b>	505	551	583	631	703	—	—	—	—	—

A maximum of two stackable panels may be added to a standard panel. Combined panel height may not exceed 118".

When combining fabric grades on a single panel, add side 1 fabric grade price to side 2 fabric grade price, then divide total by 2 to get the average.

Floor-to-Ceiling Top Channel  
➤ See page 68.


Features	➤ See page 23
Product Information	29
Application Guidelines	36
Power & Data Overview	38

## Standard Includes

- Panel
- Attachment brackets

## How to Specify

- 1 Model
- 2 Type of panel:  
**AS** = Stackable acoustical  
**PNS** = Paint/Fabric  
**WNS** = Wood/Fabric
- 3 Side 1 fabric grade or finish price group:  
**STD** = Group 1  
**STD2** = Group 2 (+20%)
- 4 Side 1 fabric number or finish designator
- 5 Side 2 fabric grade
- 6 Side 2 fabric number



<i>D</i>	<i>W</i>	<i>H</i>	<i>Model</i>	<b>Frame</b> <i>Fabric</i>	<i>Paint</i>	<i>Wood</i>
<b>12"H Panels</b>						
25½"	18"	11¾"	<b>AP1812G</b>	\$571	\$571	\$712
	24"		<b>AP2412G</b>	614	614	769
	30"		<b>AP3012G</b>	640	640	803
	36"		<b>AP3612G</b>	671	671	839
	42"		<b>AP4212G</b>	719	719	904
	48"		<b>AP4812G</b>	761	761	952
	60"		<b>AP6012G</b>	834	834	1044
<b>19"H Panels</b>						
25½"	18"	18¾"	<b>AP1819G</b>	\$597	\$597	\$750
	24"		<b>AP2419G</b>	645	645	806
	30"		<b>AP3019G</b>	674	674	843
	36"		<b>AP3619G</b>	705	705	881
	42"		<b>AP4219G</b>	756	756	947
	48"		<b>AP4819G</b>	803	803	1008
	60"		<b>AP6019G</b>	889	889	1111

A maximum of two stackable panels may be added to a standard panel. Combined panel height may not exceed 118".

➤ See page 68.

Stackable glass panels are not visually compatible with sectional glass panels.

Floor-to-Ceiling Top Channel

➤ See page 68.

Features	➤ See page 23
Product Information	29
Application Guidelines	36
Power & Data Overview	38

### Standard Includes

- Panel
- Attachment brackets

### How to Specify

- ① Model
- ② Frame:  
**SN** = Fabric  
**SP** = Paint  
**SW** = Wood
- ③ Glass option:  
**3** = Clear  
**9** = Frosted (+10%)
- ④ Frame finish price group:  
 If fabric, fabric grade.  
 If wood or paint,  
**STD** = Group 1  
**STD M** = Group M (+10%)  
**STD2** = Group 2 (+20%)
- ⑤ Finish designator or fabric number

# Stackable Ceiling Power Entry Panels

## Pricing

GSA SIN 711-1  
COM GSA Non-Contract



D	W	H	Model	Fabric Price Grade				
				A or COM	B	C	D	E
7"H Panels								
25½"	30"	6¾"	AP3007VS	\$391	\$399	\$403	\$413	\$425
	36"		AP3607VS	406	424	436	456	484
	42"		AP4207VS	410	428	440	460	488
	48"		AP4807VS	424	442	454	474	502
12"H Panels								
25½"	30"	11¾"	AP3012VS	\$503	\$513	\$521	\$531	\$547
	36"		AP3612VS	510	530	544	566	598
	42"		AP4212VS	510	534	548	574	610
	48"		AP4812VS	526	550	564	590	626
19"H Panels								
25½"	30"	18¾"	AP3019VS	\$571	\$587	\$597	\$613	\$637
	36"		AP3619VS	588	622	644	680	732
	42"		AP4219VS	593	627	649	685	737
	48"		AP4819VS	613	653	677	719	779

A maximum of two stackable panels may be added to a standard panel. Combined panel height may not exceed 118".

When combining fabric grades on a single panel, add side 1 fabric grade price to side 2 fabric grade price, then divide total by 2 to get the average.

When specifying different fabrics, keep side 1 fabric consistent with the side 1 fabric for the standard ceiling power entry panel.

Floor-to-Ceiling Top Channel  
➤ See page 68.

Features	➤ See page 23
Product Information	29
Application Guidelines	36
Power & Data Overview	38

### Standard Includes

- Panel
- Attachment brackets

### How to Specify

- ① Model
- ② Side 1 fabric grade
- ③ Side 1 fabric number
- ④ Side 2 fabric grade
- ⑤ Side 2 fabric number

## Frameless Glass

## Pricing

GSA SIN 711-1



Features	➤ See page 23
Product Information	30
Application Guidelines	36
Power & Data Overview	38

### Standard Includes

- Tempered glass pane: clear

### How to Specify

- 1 Model
- 2 Top cap material:  
**W** = Wood  
**P** = Paint
- 3 Top cap profile:  
**C** = Square
- 4 Top cap finish price group:  
**STD** = Group 1  
**STD M** = Group M (+10%)  
**STD2** = Group 2 (+20%)
- 5 Top cap finish designator
- 6 Bracket paint price group:  
**STD** = Group 1  
**STD M** = Group M (+10%\*)  
\*Applies once per model.
- 7 Bracket finish designator



<i>D</i>	<i>W</i>	<i>H</i>	<i>Fits Panel</i>	<i>Model</i>	<i>Price</i>
<b>For Use Where Adjacent Panels are the Same Height</b>					
2 <sup>5</sup> / <sub>8</sub> "	22 <sup>7</sup> / <sub>8</sub> "	11 <sup>7</sup> / <sub>16</sub> "	24"W	<b>AP2412FG3</b>	\$510
	28 <sup>7</sup> / <sub>8</sub> "		30"W	<b>AP3012FG3</b>	543
	34 <sup>7</sup> / <sub>8</sub> "		36"W	<b>AP3612FG3</b>	578
	40 <sup>7</sup> / <sub>8</sub> "		42"W	<b>AP4212FG3</b>	631
	46 <sup>7</sup> / <sub>8</sub> "		48"W	<b>AP4812FG3</b>	665
<b>For Use in Hi-Lo Application</b>					
2 <sup>5</sup> / <sub>8</sub> "	21 <sup>7</sup> / <sub>8</sub> "	11 <sup>7</sup> / <sub>16</sub> "	24"W	<b>AP2412FGH3</b>	\$510
	27 <sup>7</sup> / <sub>8</sub> "		30"W	<b>AP3012FGH3</b>	543
	33 <sup>7</sup> / <sub>8</sub> "		36"W	<b>AP3612FGH3</b>	578
	39 <sup>7</sup> / <sub>8</sub> "		42"W	<b>AP4212FGH3</b>	631
	45 <sup>7</sup> / <sub>8</sub> "		48"W	<b>AP4812FGH3</b>	665

Specify frameless glass model based on the width of the panel to which it will attach.


Top cap is available in square profile only.

Frameless glass is not for use on full glass, partial-glass, or stackable glass panels.

## Floor-to-Ceiling Top Channels & Supports

Pricing

GSA SIN 711-1



<i>D</i>	<i>W</i>	<i>H</i>	<i>Model</i>	<i>Price</i>
<b>Floor-to-Ceiling Top Channel</b>				
2 <sup>11</sup> / <sub>16</sub> "	144"	4"	<b>AAC144FCTC</b>	\$672
<b>Floor-to-Ceiling Top Channel Supports</b>				
2 <sup>11</sup> / <sub>16</sub> "	1"	4"	<b>AACTCS</b>	\$15

Features	➤ See page 23
Application Guidelines	36
Power & Data Overview	38

### Standard Includes

#### Floor-to-Ceiling Top Channels

- Set of two 12' long channels
- 8 top channel supports

#### Top Channel Supports

- Package of 4

### How to Specify

- ① Model
- ② Finish designator

Eight top channel supports are standard with top channel. Order additional only if required.



Top channel provides 2" of adjustability.



## Privacy Panels

## Pricing

GSA SIN 711-1  
COM GSA Non-Contract



<i>D</i>	<i>W</i>	<i>H</i>	<i>Model</i>	<b>Fabric Price Grade</b>				
				<i>A or COM</i>	<i>B</i>	<i>C</i>	<i>D</i>	<i>E</i>
<b>Fabric</b>								
1¾"	36"	67½"	<b>AP3668PPF</b>	\$1478	\$1576	\$1642	\$1744	\$1896
	42"		<b>AP4268PPF</b>	1521	1619	1685	1787	1939

<i>D</i>	<i>W</i>	<i>H</i>	<i>Model</i>	<i>Price</i>
<b>Translucent</b>				
1¾"	36"	67½"	<b>AP3668PPT</b>	\$1948
	42"		<b>AP4268PPT</b>	1988

When mounting privacy panel in a straight panel run, specify panel to be wider than opening to allow for proper clearance

Privacy panels are non-handed and reversible. They can be mounted left or right and can be flipped so that different fabrics can be positioned inside or out.

Features	➤ See page 23
Product Information	31
Application Guidelines	36
Power & Data Overview	38

### Standard Includes

- Privacy panel
- Mounting brackets
- Caster

### How to Specify

#### Fabric

- ① Model
- ② Frame finish designator:  
**462** = Cinder  
**501** = Platinum metallic (+10%)
- ③ Fabric grade for side 1
- ④ Fabric number for side 1
- ⑤ Fabric grade for side 2
- ⑥ Fabric number for side 2

#### Translucent

- ① Model
- ② Frame finish designator:  
**462** = Cinder  
**501** = Platinum metallic (+10%)


## Hinged Doors

### Pricing

GSA SIN 711-1



Right hinge



Left hinge

<i>D</i>	<i>W</i>	<i>H</i>	<i>Model</i>	<i>Price</i>
<b>Hinged Doors</b>				
2 $\frac{5}{8}$ "	36"	80 $\frac{3}{8}$ "	<b>AP3680D</b>	\$3313
	42"		<b>AP4280D</b>	3396

#### Related Products:

<i>Description</i>	<i>Model</i>	<i>Price</i>
<b>Brackets</b>		
Bottom door bracket	<b>ABD</b>	\$38
Bottom L bracket	<b>ABL</b>	35
Bottom straight connector bracket	<b>ABS</b>	35
Door plate	<b>ABDU</b>	21

Specify the hinge location (right or left) so that the door will swing in the correct direction. With a right hinge, door will swing away from you to the right; with a left hinge, door will swing away from you to the left.

Doors are not applicable next to V or Y connectors.

Specify appropriate bracket when installing hinged door next to a directional connector  
➤ See page 32 for proper application.

42"W hinged doors are recommended for ADA compliance.

Features	➤ See page 23
Product Information	32
Application Guidelines	36
Power & Data Overview	38

### Standard Includes

- Top cap
- Attachment brackets
- Frame and threshold


### How to Specify

#### Door


- 1 Model
- 2 Door material:  
**W** = Wood  
**P** = Paint
- 3 Hinge location:  
**R** = Right  
**L** = Left
- 4 Top cap material:  
**W** = Wood  
**P** = Paint
- 5 Door hardware (required):  
**LL2** = Locking lever (+\$445)  
**X** = No lever
- 6 Top cap profile:  
**A** = Softened  
**C** = Square  
**T** = Transitional (wood only)
- 7 Top cap finish price group:  
**STD** = Group 1  
**STD<sub>M</sub>** = Group M (+10%)  
**STD<sub>2</sub>** = Group 2 (+20%)
- 8 Top cap finish designator
- 9 Door finish price group:  
**STD** = Standard wood or non-metallic paint  
**STD<sub>2</sub>** = Group 2 (+20%\*)  
\*Applies once per model.
- 10 Door finish designator

#### Brackets

- 1 Model



<i>D</i>	<i>W</i>	<i>H</i>	<i>Model</i>	<b>Connector Material</b>	
				<i>Wood</i>	<i>Paint</i>
<b>End Trim</b>					
25½"	1"	30¾"	<b>ACC30</b>	\$216	\$166
		37¾"	<b>ACC37</b>	220	170
		42¾"	<b>ACC42</b>	221	172
		49¾"	<b>ACC50</b>	232	183
		56¾"	<b>ACC56</b>	241	189
		61¾"	<b>ACC61</b>	248	195
		68¾"	<b>ACC68</b>	259	204
		80¾"	<b>ACC80</b>	274	221



<i>D</i>	<i>W</i>	<i>H</i>	<i>Model</i>	<b>Top Cap Material</b> <i>Wood or Paint</i>
<b>X Connectors (4-way)</b>				
2 <sup>5</sup> / <sub>8</sub> "	2 <sup>5</sup> / <sub>8</sub> "	30 <sup>3</sup> / <sub>8</sub> "	<b>ACX30</b>	\$301
		37 <sup>3</sup> / <sub>8</sub> "	<b>ACX37</b>	305
		42 <sup>3</sup> / <sub>8</sub> "	<b>ACX42</b>	313
		49 <sup>3</sup> / <sub>8</sub> "	<b>ACX50</b>	326
		56 <sup>3</sup> / <sub>8</sub> "	<b>ACX56</b>	331
		61 <sup>3</sup> / <sub>8</sub> "	<b>ACX61</b>	337
		68 <sup>3</sup> / <sub>8</sub> "	<b>ACX68</b>	348
		80 <sup>3</sup> / <sub>8</sub> "	<b>ACX80</b>	363

Features	➤ See page 23
Product Information	33
Application Guidelines	36
Power & Data Overview	38

## Standard Includes

- Top cap for X connector
- Connection bracketry

## How to Specify

- ① Model
- ② End trim or top cap material:  
**W** = Wood  
**P** = Paint
- ③ Profile or top cap shape:  
**A** = Softened  
**C** = Square  
**T** = Transitional (wood only)
- ④ Finish price group:  
**STD** = Group 1  
**STD<sub>M</sub>** = Group M (+10%)  
**STD<sub>2</sub>** = Group 2 (+20%)
- ⑤ Finish designator

Features	➤ See page 23
Product Information	33
Application Guidelines	36
Power & Data Overview	38

D	W	H	Model	Connector Material		
				Fabric	Wood	Paint
L Connectors (90° softened profile)						
25⁄8"	25⁄8"	303⁄8"	ACR30	\$266	\$348	\$266
		373⁄8"	ACR37	272	359	272
		423⁄8"	ACR42	274	362	274
		493⁄8"	ACR50	285	376	285
		563⁄8"	ACR56	296	386	296
		613⁄8"	ACR61	303	393	303
		683⁄8"	ACR68	312	400	312
		803⁄8"	ACR80	326	416	326
L Connectors (90° square profile)						
25⁄8"	25⁄8"	303⁄8"	ACL30	\$266	\$348	\$266
		373⁄8"	ACL37	272	359	272
		423⁄8"	ACL42	274	362	274
		493⁄8"	ACL50	285	376	285
		563⁄8"	ACL56	296	386	296
		613⁄8"	ACL61	303	393	303
		683⁄8"	ACL68	312	400	312
		803⁄8"	ACL80	326	416	326
T Connectors (3-way)						
25⁄8"	25⁄8"	303⁄8"	ACT30	\$301	\$387	\$301
		373⁄8"	ACT37	305	395	305
		423⁄8"	ACT42	313	401	313
		493⁄8"	ACT50	326	416	326
		563⁄8"	ACT56	331	421	331
		613⁄8"	ACT61	337	429	337
		683⁄8"	ACT68	348	442	348
		803⁄8"	ACT80	363	457	363


### Standard Includes

- Top cap
- Wireway cover
- Connection bracketry

### How to Specify

- 1 Model
- 2 Connector material:  
**N** = Fabric  
**W** = Wood  
**P** = Paint
- 3 Top cap material:  
**W** = Wood  
**P** = Paint
- 4 Top cap profile:  
**A** = Softened  
**C** = Square  
**T** = Transitional (wood only)
- 5 Top cap finish price group:  
**STD** = Group 1  
**STD<sub>M</sub>** = Group M (+10%)  
**STD<sub>2</sub>** = Group 2 (+20%)
- 6 Top cap finish designator
- 7 Wireway cover finish price group:  
**STD** = Group 1  
**STD<sub>M</sub>** = Group M (+10%\*)  
**STD<sub>2</sub>** = Group 2 (+20%\*)  
 \*Applies once per model.
- 8 Wireway finish designator
- 9 Connector finish price group:  
 If fabric, fabric grade.  
 If wood or paint,  
**STD** = Group 1  
**STD<sub>M</sub>** = Group M (+10%\*)  
**STD<sub>2</sub>** = Group 2 (+20%\*)  
 \*Applies once per model.
- 10 Connector finish designator or fabric number

Transitional profile top cap is available in wood only.



D	W	H	Model	Connector Material			
				Fabric	Wood	Paint	Combination
S Connectors (Straight)							
25 <sup>5</sup> / <sub>8</sub> "	25 <sup>5</sup> / <sub>8</sub> "	30 <sup>3</sup> / <sub>8</sub> "	ACS30	\$301	\$387	\$301	\$387
		37 <sup>3</sup> / <sub>8</sub> "	ACS37	305	395	305	395
		42 <sup>3</sup> / <sub>8</sub> "	ACS42	313	401	313	401
		49 <sup>3</sup> / <sub>8</sub> "	ACS50	326	416	326	416
		56 <sup>3</sup> / <sub>8</sub> "	ACS56	331	421	331	421
		61 <sup>3</sup> / <sub>8</sub> "	ACS61	337	429	337	429
		68 <sup>3</sup> / <sub>8</sub> "	ACS68	348	442	348	442
		80 <sup>3</sup> / <sub>8</sub> "	ACS80	363	457	363	457

S connectors are reversible.

Features	➤ See page 23
Product Information	33
Application Guidelines	36
Power & Data Overview	38



## Standard Includes

- Top cap
- Wireway cover
- Connection bracketry

## How to Specify

- 1 Model
- 2 Connector material:
  - N** = Fabric
  - W** = Wood
  - P** = Paint
  - PN** = Side 1 paint; side 2 fabric
  - WN** = Side 1 wood; side 2 fabric
  - PW** = Side 1 paint; side 2 wood
- 3 Top cap material:
  - W** = Wood
  - P** = Paint
- 4 Top cap profile:
  - A** = Softened
  - C** = Square
  - T** = Transitional (wood only)
- 5 Top cap finish price group:
  - STD** = Group 1
  - STD<sub>M</sub>** = Group M (+10%)
  - STD<sub>2</sub>** = Group 2 (+20%)
- 6 Top cap finish designator
- 7 Wireway cover finish price group:
  - STD** = Group 1
  - STD<sub>M</sub>** = Group M (+10%\*)
- 8 Wireway finish designator
- 9 Side 1 finish price group:
  - If fabric, fabric grade.
  - If wood or paint:
    - STD** = Group 1
    - STD<sub>M</sub>** = Group M (+10%\*)
    - STD<sub>2</sub>** = Group 2 (+20%\*)
- 10 Side 1 finish designator or fabric number
- 11 Side 2 finish price group:
  - If fabric, fabric grade.
  - If wood or paint: **STD, STD<sub>M</sub>** (+10%\*), **STD<sub>2</sub>** (+20%\*),  
\*Applies once per model.
- 12 Side 2 finish designator or fabric number

Features	➤ See page 23
Product Information	33
Application Guidelines	36
Power & Data Overview	38



D	W	H	Model	Connector Material			
				Fabric	Wood	Paint	Combination
M Connectors (5/8" Wall Mount)							
25½"	5/8"	30¾"	ACM30	\$301	—	\$301	\$387
		37¾"	ACM37	305	—	305	395
		42¾"	ACM42	313	—	313	401
		49¾"	ACM50	326	—	326	416
		56¾"	ACM56	331	—	331	421
		61¾"	ACM61	337	—	337	429
		68¾"	ACM68	348	—	348	442
		80¾"	ACM80	363	—	363	457
W Connectors (23/4" Wall Mount)							
25½"	2¾"	30¾"	ACW30	\$301	\$387	\$301	\$387
		37¾"	ACW37	305	395	305	395
		42¾"	ACW42	313	401	313	401
		49¾"	ACW50	326	416	326	416
		56¾"	ACW56	331	421	331	421
		61¾"	ACW61	337	429	337	429
		68¾"	ACW68	348	442	348	442
		80¾"	ACW80	363	457	363	457

M & W connectors are not reversible.

M connectors are not available in wood or wood combination.

### Standard Includes

- Top cap
- Connection bracketry


### How to Specify

- 1 Model
- 2 Connector material:  
**N** = Fabric  
**W** = Wood  
**P** = Paint  
**PN** = Side 1 paint; side 2 fabric  
**NP** = Side 1 fabric; side 2 paint  
**WN** = Side 1 wood; side 2 fabric  
**NW** = Side 1 fabric; side 2 wood  
**PW** = Side 1 paint; side 2 wood  
**WP** = Side 1 wood; side 2 paint
- 3 Top cap material:  
**W** = Wood  
**P** = Paint
- 4 Top cap profile:  
**A** = Softened  
**C** = Square  
**T** = Transitional (wood only)
- 5 Top cap finish price group:  
**STD** = Group 1  
**STD<sub>M</sub>** = Group M (+10%)  
**STD<sub>2</sub>** = Group 2 (+20%)
- 6 Top cap finish designator
- 7 Side 1 finish price group:  
 If fabric, fabric grade.  
 If wood or paint:  
**STD** = Group 1  
**STD<sub>M</sub>** = Group M (+10%\*)  
**STD<sub>2</sub>** = Group 2 (+20%\*)  
 \*Applies once per model.
- 8 Side 1 finish designator or fabric number
- 9 Side 2 finish price group:  
 If fabric, fabric grade.  
 If wood or paint: **STD**, **STD<sub>M</sub>** (+10%\*), **STD<sub>2</sub>** (+20%\*),  
 \*Applies once per model.
- 10 Side 2 finish designator or fabric number

## Y Connectors

## Pricing

GSA SIN 711-1  
COM GSA Non-Contract



<i>D</i>	<i>W</i>	<i>H</i>	<i>Model</i>	<b>Connector Material</b>		
				<i>Fabric</i>	<i>Wood</i>	<i>Paint</i>
<b>Y Connectors (3-way 120°/120°/120°)</b>						
	2 <sup>5</sup> / <sub>8</sub> "	30 <sup>3</sup> / <sub>8</sub> "	<b>ACY30</b>	\$301	\$387	\$301
		37 <sup>3</sup> / <sub>8</sub> "	<b>ACY37</b>	305	395	305
		42 <sup>3</sup> / <sub>8</sub> "	<b>ACY42</b>	313	401	313
		49 <sup>3</sup> / <sub>8</sub> "	<b>ACY50</b>	326	416	326
		56 <sup>3</sup> / <sub>8</sub> "	<b>ACY56</b>	331	421	331
		61 <sup>3</sup> / <sub>8</sub> "	<b>ACY61</b>	337	429	337
		68 <sup>3</sup> / <sub>8</sub> "	<b>ACY68</b>	348	442	348
		80 <sup>3</sup> / <sub>8</sub> "	<b>ACY80</b>	363	457	363

Y connectors are not available in combination materials, however, different fabrics may be specified on each side.

Finish must be the same for all sides when specified in wood or paint.

Features	➤ See page 23
Product Information	33
Application Guidelines	36
Power & Data Overview	38

### Standard Includes

- Top cap
- Wireway cover
- Connection bracketry

### How to Specify




- ① Model
- ③ Connector material:  
**N** = Fabric  
**W** = Wood  
**P** = Paint
- ③ Top cap material:  
**W** = Wood  
**P** = Paint
- ④ Top cap profile:  
**A** = Softened  
**C** = Square  
**T** = Transitional (wood only)
- ⑤ Top cap finish price group:  
**STD** = Group 1  
**STD<sub>M</sub>** = Group M (+10%)  
**STD<sub>2</sub>** = Group 2 (+20%)
- ⑥ Top cap finish designator
- ⑦ Wireway cover finish price group:  
**STD** = Group 1  
**STD<sub>M</sub>** = Group M (+10%\*)
- ⑧ Wireway finish designator
- ⑨ Side 1 finish price group:  
 If fabric, fabric grade.  
 If wood or paint:  
**STD** = Group 1  
**STD<sub>M</sub>** = Group M (+10%\*)  
**STD<sub>2</sub>** = Group 2 (+20%\*)  
*\*Applies once per model.*
- ⑩ Side 1 finish designator or fabric number
- ⑪ Side 2 fabric grade
- ⑫ Side 2 fabric number
- ⑬ Side 3 fabric grade
- ⑭ Side 3 fabric number



# Mid-Wireway L and T Connectors

Pricing

GSA SIN 711-1



D	W	H	Model	Connector Material		
				Fabric	Wood	Paint
L Connectors (90° softened profile)						
25⁄8"	25⁄8"	423⁄8"	ACR42M	\$371	\$477	\$371
		493⁄8"	ACR50M	396	497	396
		563⁄8"	ACR56M	412	508	412
		613⁄8"	ACR61M	427	517	427
		683⁄8"	ACR68M	443	529	443
		803⁄8"	ACR80M	467	547	467
L Connectors (90° square profile)						
25⁄8"	25⁄8"	423⁄8"	ACL42M	\$371	\$477	\$371
		493⁄8"	ACL50M	396	497	396
		563⁄8"	ACL56M	412	508	412
		613⁄8"	ACL61M	427	517	427
		683⁄8"	ACL68M	443	529	443
		803⁄8"	ACL80M	467	547	467
T Connectors (3-way)						
25⁄8"	25⁄8"	423⁄8"	ACT42M	\$411	\$531	\$411
		493⁄8"	ACT50M	429	547	429
		563⁄8"	ACT56M	439	557	439
		613⁄8"	ACT61M	446	569	446
		683⁄8"	ACT68M	459	581	459
		803⁄8"	ACT80M	478	601	478

Features	➤ See page 23
Product Information	33
Application Guidelines	36
Power & Data Overview	38

## Standard Includes

- Top cap
- Wireway cover
- Connection bracketry



## How to Specify

- 1 Model
- 2 Connector material:  
**N** = Fabric  
**W** = Wood  
**P** = Paint
- 3 Top cap material:  
**W** = Wood  
**P** = Paint
- 4 Top cap profile:  
**A** = Softened  
**C** = Square  
**T** = Transitional (wood only)
- 5 Top cap finish price group:  
**STD** = Group 1  
**STD M** = Group M (+10%)  
**STD2** = Group 2 (+20%)
- 6 Top cap finish designator
- 7 Wireway cover finish price group:  
**STD** = Group 1  
**STD M** = Group M (+10%\*)  
**STD2** = Group 2 (+20%\*)  
 \*Applies once per model.
- 8 Wireway finish designator
- 9 Side 1 finish price group:  
 If fabric, fabric grade.  
 If wood or paint:  
**STD** = Group 1  
**STD M** = Group M (+10%\*)  
**STD2** = Group 2 (+20%\*)  
 \*Applies once per model.
- 10 Connector finish designator or fabric number

## Mid-Wireway X and S Connectors

Pricing

GSA SIN 711-1  
COM GSA Non-Contract



D	W	H	Model	Top Cap Material		
				Wood or Paint		
X Connectors (4-way)						
25⁄8"	25⁄8"	423⁄8"	ACX42M	\$411		
		493⁄8"	ACX50M	429		
		563⁄8"	ACX56M	439		
		613⁄8"	ACX61M	446		
		683⁄8"	ACX68M	459		
		803⁄8"	ACX80M	478		
D	W	H	Model	Connector Material		
				Fabric	Wood	Paint
S Connectors (Straight)						
25⁄8"	25⁄8"	423⁄8"	ACS42M	\$411	\$531	\$411
		493⁄8"	ACS50M	429	547	429
		563⁄8"	ACS56M	439	557	439
		613⁄8"	ACS61M	446	569	446
		683⁄8"	ACS68M	459	581	459
		803⁄8"	ACS80M	478	601	478

Connector finish and wireway finish are not required for X connectors. Top cap finish is required.

Features	➔ See page 23
Product Information	33
Application Guidelines	36
Power & Data Overview	38

### Standard Includes

- Top cap
- Wireway cover
- Connection bracket

### How to Specify



- 1 Model
- 2 Connector material (omit for X connector):  
**N** = Fabric  
**W** = Wood  
**P** = Paint
- 3 Top cap material:  
**W** = Wood  
**P** = Paint
- 4 Top cap profile:  
**A** = Softened  
**C** = Square  
**T** = Transitional (wood only)
- 5 Top cap finish price group:  
**STD** = Group 1  
**STD<sub>M</sub>** = Group M (+10%)  
**STD<sub>2</sub>** = Group 2 (+20%)
- 6 Top cap finish designator
- 7 Wireway cover finish price group:  
**STD** = Group 1  
**STD<sub>M</sub>** = Group M (+10%\*)
- 8 Wireway finish designator
- 9 Side 1 finish price group:  
 If fabric, fabric grade.  
 If wood or paint:  
**STD** = Group 1  
**STD<sub>M</sub>** = Group M (+10%\*)  
**STD<sub>2</sub>** = Group 2 (+20%\*)
- 10 Side 1 finish designator or fabric number (omit for X connector)
- 11 Side 2 finish price group (omit for X connector):  
 If fabric: fabric grade.  
 If wood or paint: **STD**, **STD<sub>M</sub>** (+10%\*), **STD<sub>2</sub>** (+20%\*),  
 \*Applies once per model.
- 12 Side 2 finish designator or fabric number (omit for X connector)

# Stackable End Trim

## Pricing

GSA SIN 711-1  
COM GSA Non-Contract

<i>D</i>	<i>W</i>	<i>H</i>	<i>Model</i>	<i>Wood</i>	<i>Paint</i>
<b>End Trim</b>					
<b>Under 80"H</b>					
2 <sup>5</sup> / <sub>8</sub> "	1"	43 <sup>3</sup> / <sub>4</sub> "	<b>ACC44</b>	\$226	\$177
		50 <sup>3</sup> / <sub>4</sub> "	<b>ACC51</b>	234	185
		53 <sup>3</sup> / <sub>4</sub> "	<b>ACC54</b>	238	188
		62 <sup>3</sup> / <sub>4</sub> "	<b>ACC63</b>	256	196
		65 <sup>3</sup> / <sub>4</sub> "	<b>ACC66</b>	257	199
		69 <sup>3</sup> / <sub>4</sub> "	<b>ACC70</b>	264	209
		72 <sup>3</sup> / <sub>4</sub> "	<b>ACC73</b>	266	213
		74 <sup>3</sup> / <sub>4</sub> "	<b>ACC75</b>	268	218
<b>Over 80"H</b>					
2 <sup>5</sup> / <sub>8</sub> "	1"	81 <sup>3</sup> / <sub>4</sub> "	<b>ACC82</b>	\$331	\$257
		84 <sup>3</sup> / <sub>4</sub> "	<b>ACC85</b>	361	285
		86 <sup>3</sup> / <sub>4</sub> "	<b>ACC87</b>	387	320
		91 <sup>3</sup> / <sub>4</sub> "	<b>ACC92</b>	419	352
		93 <sup>3</sup> / <sub>4</sub> "	<b>ACC94</b>	461	387
		98 <sup>3</sup> / <sub>4</sub> "	<b>ACC99</b>	504	419
		103 <sup>3</sup> / <sub>4</sub> "	<b>ACC104</b>	554	461
		105 <sup>3</sup> / <sub>4</sub> "	<b>ACC106</b>	586	504
		110 <sup>3</sup> / <sub>4</sub> "	<b>ACC111</b>	629	554
		117 <sup>3</sup> / <sub>4</sub> "	<b>ACC118</b>	672	604



Transitional profile end trim is available in wood only.

End caps over 80"H feature a transition cap.

Features	➤ See page 23
Product Information	35
Application Guidelines	36
Power & Data Overview	38

### Standard Includes

- Stackable end trim

### How to Specify

- 1 Model
- 2 End trim material:  
**W** = Wood  
**P** = Paint
- 3 End trim profile:  
**A** = Softened  
**C** = Square  
**T** = Transitional (wood only)
- 4 End trim finish price group:  
**STD** = Group 1  
**STD<sub>M</sub>** = Group M (+10%)  
**STD<sub>2</sub>** = Group 2 (+20%)
- 5 End trim finish designator

# Stackable L and T Connectors

Pricing

GSA SIN 711-1

Features	➤ See page 23
Product Information	33
Application Guidelines	36
Power & Data Overview	38

D	W	H	Model	Connector Material		Paint
				Fabric	Wood	
L Connectors (90° softened profile)						
25⁄8"	25⁄8"	63⁄4"	ACR07	\$120	\$170	\$120
		113⁄4"	ACR12	127	177	127
		133⁄4"	ACR14	132	185	132
		183⁄4"	ACR19	151	199	151
		233⁄4"	ACR24	170	220	170
		253⁄4"	ACR26	209	250	209
		303⁄4"	ACR31	268	352	268
		373⁄4"	ACR38	273	361	273
L Connectors (90° square profile)						
25⁄8"	25⁄8"	63⁄4"	ACL07	\$120	\$170	\$120
		113⁄4"	ACL12	127	177	127
		133⁄4"	ACL14	132	185	132
		183⁄4"	ACL19	151	199	151
		233⁄4"	ACL24	170	220	170
		253⁄4"	ACL26	209	250	209
		303⁄4"	ACL31	268	352	268
		373⁄4"	ACL38	273	361	273
T Connectors (3-way)						
25⁄8"	25⁄8"	63⁄4"	ACT07	\$151	\$199	\$151
		113⁄4"	ACT12	158	209	158
		133⁄4"	ACT14	170	220	170
		183⁄4"	ACT19	185	234	185
		233⁄4"	ACT24	199	268	199
		253⁄4"	ACT26	250	301	250
		303⁄4"	ACT31	303	389	303
		373⁄4"	ACT38	306	396	306

## Standard Includes

- Connector

## How to Specify

- ① Model
- ② Connector material:  
**N** = Fabric  
**W** = Wood  
**P** = Paint
- ③ Connector finish price group:  
 If fabric, fabric grade.  
 If wood or paint,  
**STD** = Group 1  
**STDM** = Group M (+10%)  
**STD2** = Group 2 (+20%)
- ④ Connector finish designator or fabric number



IMPORTANT: Top caps from base connectors are used on stackable connectors. When specifying a stackable connector that is different from the base connector, the appropriate top cap/bracket assembly must be specified separately.

➤ See page 100.

# Stackable X and S Connectors

Pricing

GSA SIN 711-1



<i>D</i>	<i>W</i>	<i>H</i>	<i>Model</i>	<i>Price</i>				
<b>Stackable X Connectors (4-way)</b>								
25/8"	25/8"	63/4"	<b>ACX07S</b>	\$148				
		113/4"	<b>ACX12S</b>	154				
		133/4"	<b>ACX14S</b>	165				
		183/4"	<b>ACX19S</b>	181				
		233/4"	<b>ACX24S</b>	194				
		253/4"	<b>ACX26S</b>	242				
		303/4"	<b>ACX31S</b>	295				
		373/4"	<b>ACX38S</b>	298				
					<b>Connector Material</b>			
<i>D</i>	<i>W</i>	<i>H</i>	<i>Model</i>		<i>Fabric</i>	<i>Wood</i>	<i>Paint</i>	<i>Combination</i>
<b>Stackable S Connectors (Straight)</b>								
25/8"	25/8"	63/4"	<b>ACS07</b>	\$151	\$199	\$151	\$199	
		113/4"	<b>ACS12</b>	158	209	158	209	
		133/4"	<b>ACS14</b>	170	220	170	220	
		183/4"	<b>ACS19</b>	185	234	185	234	
		233/4"	<b>ACS24</b>	199	268	199	268	
		253/4"	<b>ACS26</b>	250	301	250	301	
		303/4"	<b>ACS31</b>	303	389	303	389	
		373/4"	<b>ACS38</b>	306	396	306	396	

IMPORTANT: Top caps from base connectors are used on stackable connectors. When specifying a stackable connector that is different from the base connector, the appropriate top cap/bracket assembly must be specified separately.

➤ See page 100.

Features	➤ See page 23
Product Information	33
Application Guidelines	36
Power & Data Overview	38

## Standard Includes

- Connector

## How to Specify

### X Connector

- 1 Model

### S Connector

- 1 Model
- 2 Connector material:  
**N** = Fabric  
**W** = Wood  
**P** = Paint  
**PN** = Side 1 paint; side 2 fabric  
**WN** = Side 1 wood; side 2 fabric  
**PW** = Side 1 paint; side 2 wood
- 3 Side 1 connector finish price group:  
 If fabric, fabric grade.  
 If wood or paint,  
**STD** = Group 1  
**STD M** = Group M (+10%)  
**STD2** = Group 2 (+20%)
- 4 Side 1 finish designator or fabric number
- 5 Side 2 connector finish price group:  
 If fabric, fabric grade.  
 If wood or paint,  
**STD** = Group 1  
**STD M** = Group M (+10%\*)  
**STD2** = Group 2 (+20%\*)  
 \*Applies once per model.
- 6 Side 2 finish designator or fabric number

# Stackable M and W Connectors

Pricing

GSA SIN 711-1  
COM GSA Non-Contract

Features	➤ See page 23
Product Information	33
Application Guidelines	36
Power & Data Overview	38



## Standard Includes

- Connector

## How to Specify

- Model
- Connector material:  
**N** = Fabric  
**W** = Wood  
**P** = Paint  
**PN** = Side 1 paint; side 2 fabric  
**NP** = Side 1 fabric; side 2 paint  
**WN** = Side 1 wood; side 2 fabric  
**NW** = Side 1 fabric; side 2 wood  
**PW** = Side 1 paint; side 2 wood  
**WP** = Side 1 wood; side 2 paint
- Side 1 connector finish price group:  
 If fabric, fabric grade.  
 If wood or paint,  
**STD** = Group 1  
**STD M** = Group M (+10%)  
**STD2** = Group 2 (+20%)
- Side 1 finish designator or fabric number
- Side 2 connector finish price group:  
 If fabric, fabric grade.  
 If wood or paint, **STD**, **STD M** (+10%), **STD2** (+20%\*)  
 \*Applies once per model.
- Side 2 finish designator or fabric number

D	W	H	Model	Connector Material			
				Fabric	Wood	Paint	Combination
Stackable M Connectors (5⁄8" Wall Mount)							
25⁄8"	5⁄8"	6¾"	ACM07	\$151	—	\$151	\$199
		11¾"	ACM12	158	—	158	209
		13¾"	ACM14	170	—	170	220
		18¾"	ACM19	185	—	185	234
		23¾"	ACM24	199	—	199	268
		25¾"	ACM26	250	—	250	301
		30¾"	ACM31	303	—	303	389
		37¾"	ACM38	306	—	306	396
Stackable W Connectors (2¾" Wall Mount)							
25⁄8"	2¾"	6¾"	ACW07	\$151	\$199	\$151	\$199
		11¾"	ACW12	158	209	158	209
		13¾"	ACW14	170	220	170	220
		18¾"	ACW19	185	234	185	234
		23¾"	ACW24	199	268	199	268
		25¾"	ACW26	250	301	250	301
		30¾"	ACW31	303	389	303	389
		37¾"	ACW38	306	396	306	396



M connectors are not available in wood or wood combination.

**IMPORTANT:** Top caps from base connectors are used on stackable connectors. When specifying a stackable connector that is different from the base connector, the appropriate top cap/bracket assembly must be specified separately.


➤ See page 100.

# Hi-Lo Trim Kits for Standard Panels

For 5" to 13" Drops

Pricing

GSA SIN 711-1



Width of Lower Panel	Panel-to-Panel Model	Connector-to-Panel Model	Price
<b>5" Drop</b> (from 42"H to 37"H; and 61"H to 56"H)			
18"	<b>AH0518P</b>	<b>AH0518C</b>	\$123
24"	<b>AH0524P</b>	<b>AH0524C</b>	123
30"	<b>AH0530P</b>	<b>AH0530C</b>	123
36"	<b>AH0536P</b>	<b>AH0536C</b>	123
42"	<b>AH0542P</b>	<b>AH0542C</b>	123
48"	<b>AH0548P</b>	<b>AH0548C</b>	123
60"	<b>AH0560P</b>	<b>AH0560C</b>	123
<b>6", 7", and 8" Drops</b> (from 37"H to 30"H; 50"H to 42"H; 56"H to 50"H; and 68"H to 61"H)			
18"	<b>AH0618P</b>	<b>AH0618C</b>	\$123
24"	<b>AH0624P</b>	<b>AH0624C</b>	123
30"	<b>AH0630P</b>	<b>AH0630C</b>	123
36"	<b>AH0636P</b>	<b>AH0636C</b>	123
42"	<b>AH0642P</b>	<b>AH0642C</b>	123
48"	<b>AH0648P</b>	<b>AH0648C</b>	123
60"	<b>AH0660P</b>	<b>AH0660C</b>	123
<b>11", 12", and 13" Drops</b> (from 42"H to 30"H; 50"H to 37"H; 61"H to 50"H; 68"H to 56"H; 80"H to 68"H)			
18"	<b>AH1218P</b>	<b>AH1218C</b>	\$129
24"	<b>AH1224P</b>	<b>AH1224C</b>	129
30"	<b>AH1230P</b>	<b>AH1230C</b>	129
36"	<b>AH1236P</b>	<b>AH1236C</b>	129
42"	<b>AH1242P</b>	<b>AH1242C</b>	129
48"	<b>AH1248P</b>	<b>AH1248C</b>	129
60"	<b>AH1260P</b>	<b>AH1260C</b>	129

To select the correct model number, determine 1) height of drop; 2) width of the lower panel; and 3) application (panel-to-panel or connector-to-panel)

**IMPORTANT:** When you specify a hi-lo trim kit to be used with a directional connector, the appropriate connector top cap/bracket assemblies must be specified separately.

➤ See page 101.

Transitional profile is available in wood only.

Features	➤ See page 23
Product Information	35
Application Guidelines	36
Power & Data Overview	38

## Standard Includes

- Vertical trim for taller panel
- Top cap for lower panel

## How to Specify

- 1 Model
- 2 Top cap material:  
**W** = Wood  
**P** = Paint
- 3 Top cap profile:  
**A** = Softened  
**C** = Square  
**T** = Transitional (wood only)
- 4 Top cap finish price group:  
**STD** = Group 1  
**STD M** = Group M (+10%)  
**STD2** = Group 2 (+20%)
- 5 Top cap finish designator




## Hi-Lo Trim Kits for Standard Panels

For 14" to 24" Drops

Pricing

GSA SIN 711-1  
COM GSA Non-Contract



Width of Lower Panel	Panel-to-Panel Model	Connector-to-Panel Model	Price
<b>14" Drops</b> (from 56"H to 42"H)			
18"	<b>AH1418P</b>	<b>AH1418C</b>	\$129
24"	<b>AH1424P</b>	<b>AH1424C</b>	129
30"	<b>AH1430P</b>	<b>AH1430C</b>	129
36"	<b>AH1436P</b>	<b>AH1436C</b>	129
42"	<b>AH1442P</b>	<b>AH1442C</b>	129
48"	<b>AH1448P</b>	<b>AH1448C</b>	129
60"	<b>AH1460P</b>	<b>AH1460C</b>	129
<b>18", 19", and 20" Drops</b> (from 50"H to 30"H; 56"H to 37"H; 61"H to 42"H; 68"H to 50"H; and 80"H to 61"H)			
18"	<b>AH1918P</b>	<b>AH1918C</b>	\$137
24"	<b>AH1924P</b>	<b>AH1924C</b>	137
30"	<b>AH1930P</b>	<b>AH1930C</b>	137
36"	<b>AH1936P</b>	<b>AH1936C</b>	137
42"	<b>AH1942P</b>	<b>AH1942C</b>	137
48"	<b>AH1948P</b>	<b>AH1948C</b>	137
60"	<b>AH1960P</b>	<b>AH1960C</b>	137
<b>24" Drop</b> (from 61"H to 37"H; and 80"H to 56"H)			
18"	<b>AH2418P</b>	<b>AH2418C</b>	\$150
24"	<b>AH2424P</b>	<b>AH2424C</b>	150
30"	<b>AH2430P</b>	<b>AH2430C</b>	150
36"	<b>AH2436P</b>	<b>AH2436C</b>	150
42"	<b>AH2442P</b>	<b>AH2442C</b>	150
48"	<b>AH2448P</b>	<b>AH2448C</b>	150
60"	<b>AH2460P</b>	<b>AH2460C</b>	150

To select the correct model number, determine 1) height of drop; 2) width of the lower panel; and 3) application (panel-to-panel or connector-to-panel)

**IMPORTANT:** When you specify a hi-lo trim kit to be used with a directional connector, the appropriate connector top cap/bracket assemblies must be specified separately.

➤ See page 101.

Transitional profile is available in wood only.

Features	➤ See page 23
Product Information	35
Application Guidelines	36
Power & Data Overview	38

### Standard Includes

- Vertical trim for taller panel
- Top cap for lower panel

### How to Specify


- 1 Model
- 2 Top cap material:  
**W** = Wood  
**P** = Paint
- 3 Top cap profile:  
**A** = Softened  
**C** = Square  
**T** = Transitional (wood only)
- 4 Top cap finish price group:  
**STD** = Group 1  
**STD M** = Group M (+10%)  
**STD2** = Group 2 (+20%)
- 5 Top cap finish designator

## Hi-Lo Trim Kits for Standard Panels

For 26" to 38" Drops

Pricing

GSA SIN 711-1  
COM GSA Non-Contract



Width of Lower Panel	Panel-to-Panel Model	Connector-to-Panel Model	Price
<b>26" Drops</b> (from 55"H to 30"H; and 68"H to 42"H)			
18"	<b>AH2618P</b>	<b>AH2618C</b>	\$150
24"	<b>AH2624P</b>	<b>AH2624C</b>	150
30"	<b>AH2630P</b>	<b>AH2630C</b>	150
36"	<b>AH2636P</b>	<b>AH2636C</b>	150
42"	<b>AH2642P</b>	<b>AH2642C</b>	150
48"	<b>AH2648P</b>	<b>AH2648C</b>	150
60"	<b>AH2660P</b>	<b>AH2660C</b>	150
<b>30" and 31" Drops</b> (from 61"H to 30"H; 68"H to 37"H; and 80"H to 50"H)			
18"	<b>AH3018P</b>	<b>AH3018C</b>	\$155
24"	<b>AH3024P</b>	<b>AH3024C</b>	155
30"	<b>AH3030P</b>	<b>AH3030C</b>	155
36"	<b>AH3036P</b>	<b>AH3036C</b>	155
42"	<b>AH3042P</b>	<b>AH3042C</b>	155
48"	<b>AH3048P</b>	<b>AH3048C</b>	155
60"	<b>AH3060P</b>	<b>AH3060C</b>	155
<b>38" Drop</b> (from 68"H to 30"H; and 80"H to 42"H)			
18"	<b>AH3818P</b>	<b>AH3818C</b>	\$170
24"	<b>AH3824P</b>	<b>AH3824C</b>	170
30"	<b>AH3830P</b>	<b>AH3830C</b>	170
36"	<b>AH3836P</b>	<b>AH3836C</b>	170
42"	<b>AH3842P</b>	<b>AH3842C</b>	170
48"	<b>AH3848P</b>	<b>AH3848C</b>	170
60"	<b>AH3860P</b>	<b>AH3860C</b>	170

To select the correct model number, determine 1) height of drop; 2) width of the lower panel; and 3) application (panel-to-panel or connector-to-panel)

**IMPORTANT:** When you specify a hi-lo trim kit to be used with a directional connector, the appropriate connector top cap/bracket assemblies must be specified separately.

➤ See page 101.

Transitional profile is available in wood only.

Features	➤ See page 23
Product Information	35
Application Guidelines	36
Power & Data Overview	38

### Standard Includes

- Vertical trim for taller panel
- Top cap for lower panel

### How to Specify


- 1 Model
- 2 Top cap material:  
**W** = Wood  
**P** = Paint
- 3 Top cap profile:  
**A** = Softened  
**C** = Square  
**T** = Transitional (wood only)
- 4 Top cap finish price group:  
**STD** = Group 1  
**STD M** = Group M (+10%)  
**STD2** = Group 2 (+20%)
- 5 Top cap finish designator

## Hi-Lo Trim Kits for Standard Panels

For 43" to 50" Drops

Pricing

GSA SIN 711-1  
COM GSA Non-Contract



Width of Lower Panel	Panel-to-Panel Model	Connector-to-Panel Model	Price
<b>43" Drops</b> (from 80"H to 37"H)			
18"	<b>AH4318P</b>	<b>AH4318C</b>	\$199
24"	<b>AH4324P</b>	<b>AH4324C</b>	199
30"	<b>AH4330P</b>	<b>AH4330C</b>	199
36"	<b>AH4336P</b>	<b>AH4336C</b>	199
42"	<b>AH4342P</b>	<b>AH4342C</b>	199
48"	<b>AH4348P</b>	<b>AH4348C</b>	199
60"	<b>AH4360P</b>	<b>AH4360C</b>	199
<b>50" Drop</b> (from 80"H to 30"H)			
18"	<b>AH5018P</b>	<b>AH5018C</b>	\$232
24"	<b>AH5024P</b>	<b>AH5024C</b>	232
30"	<b>AH5030P</b>	<b>AH5030C</b>	232
36"	<b>AH5036P</b>	<b>AH5036C</b>	232
42"	<b>AH5042P</b>	<b>AH5042C</b>	232
48"	<b>AH5048P</b>	<b>AH5048C</b>	232
60"	<b>AH5060P</b>	<b>AH5060C</b>	232

To select the correct model number, determine 1) height of drop; 2) width of the lower panel; and 3) application (panel-to-panel or connector-to-panels)

**IMPORTANT:** When you specify a hi-lo trim kit to be used with a directional connector, the appropriate connector top cap/bracket assemblies must be specified separately.

➤ See page 101.

Transitional profile is available in wood only.

Features	➤ See page 23
Product Information	35
Application Guidelines	36
Power & Data Overview	38

### Standard Includes

- Vertical trim for taller panel
- Top cap for lower panel

### How to Specify


- ① Model
- ② Top cap material:  
**W** = Wood  
**P** = Paint
- ③ Top cap profile:  
**A** = Softened  
**C** = Square  
**T** = Transitional (wood only)
- ④ Top cap finish price group:  
**STD** = Group 1  
**STD M** = Group M (+10%)  
**STD2** = Group 2 (+20%)
- ⑤ Top cap finish designator

## Hi-Lo Trim Kits for Stackable Panels

For 5" to 9" Drops

Pricing

GSA SIN 711-1  
COM GSA Non-Contract



Panel-to-Panel

<i>Width of Lower Panel</i>	<i>Panel-to-Panel Model</i>	<i>Price</i>
<b>5" Drop</b>		
18"	<b>AH0518PS</b>	\$123
24"	<b>AH0524PS</b>	123
30"	<b>AH0530PS</b>	123
36"	<b>AH0536PS</b>	123
42"	<b>AH0542PS</b>	123
48"	<b>AH0548PS</b>	123
60"	<b>AH0560PS</b>	123
<b>7" Drop</b>		
18"	<b>AH0718PS</b>	\$123
24"	<b>AH0724PS</b>	123
30"	<b>AH0730PS</b>	123
36"	<b>AH0736PS</b>	123
42"	<b>AH0742PS</b>	123
48"	<b>AH0748PS</b>	123
60"	<b>AH0760PS</b>	123
<b>9" Drop</b>		
18"	<b>AH0918PS</b>	\$127
24"	<b>AH0924PS</b>	127
30"	<b>AH0930PS</b>	127
36"	<b>AH0936PS</b>	127
42"	<b>AH0942PS</b>	127
48"	<b>AH0948PS</b>	127
60"	<b>AH0960PS</b>	127

To select the correct model number, determine 1) height of drop; 2) width of the lower panel.

Transitional profile is available in wood only.

Features	➤ See page 23
Product Information	35
Application Guidelines	36
Power & Data Overview	38

### Standard Includes

- Vertical trim for taller panel
- Top cap for lower panel

### How to Specify


- 1 Model
- 2 Top cap material:  
**W** = Wood  
**P** = Paint
- 3 Top cap profile:  
**A** = Softened  
**C** = Square  
**T** = Transitional (wood only)
- 4 Top cap finish price group:  
**STD** = Group 1  
**STD M** = Group M (+10%)  
**STD2** = Group 2 (+20%)
- 5 Top cap finish designator

## Hi-Lo Trim Kits for Stackable Panels

For 10" to 14" Drops

Pricing

GSA SIN 711-1  
COM GSA Non-Contract



Panel-to-Panel

<i>Width of Lower Panel</i>	<i>Panel-to-Panel Model</i>	<i>Price</i>
<b>10" Drop</b>		
18"	<b>AH1018PS</b>	\$127
24"	<b>AH1024PS</b>	127
30"	<b>AH1030PS</b>	127
36"	<b>AH1036PS</b>	127
42"	<b>AH1042PS</b>	127
48"	<b>AH1048PS</b>	127
60"	<b>AH1060PS</b>	127
<b>12" Drop</b>		
18"	<b>AH1218PS</b>	\$129
24"	<b>AH1224PS</b>	129
30"	<b>AH1230PS</b>	129
36"	<b>AH1236PS</b>	129
42"	<b>AH1242PS</b>	129
48"	<b>AH1248PS</b>	129
60"	<b>AH1260PS</b>	129
<b>14" Drop</b>		
18"	<b>AH1418PS</b>	\$129
24"	<b>AH1424PS</b>	129
30"	<b>AH1430PS</b>	129
36"	<b>AH1436PS</b>	129
42"	<b>AH1442PS</b>	129
48"	<b>AH1448PS</b>	129
60"	<b>AH1460PS</b>	129

To select the correct model number, determine 1) height of drop; 2) width of the lower panels

Transitional profile is available in wood only.

Features	➤ See page 23
Product Information	35
Application Guidelines	36
Power & Data Overview	38

### Standard Includes

- Vertical trim for taller panel
- Top cap for lower panel

### How to Specify

- 1 Model
- 2 Top cap material:  
**W** = Wood  
**P** = Paint
- 3 Top cap profile:  
**A** = Softened  
**C** = Square  
**T** = Transitional (wood only)
- 4 Top cap finish price group:  
**STD** = Group 1  
**STD M** = Group M (+10%)  
**STD2** = Group 2 (+20%)
- 5 Top cap finish designator


## Hi-Lo Trim Kits for Stackable Panels

For 15" to 17" Drops

Pricing

GSA SIN 711-1  
COM GSA Non-Contract

Features	➤ See page 23
Product Information	35
Application Guidelines	36
Power & Data Overview	38



Panel-to-Panel

Width of Lower Panel	Panel-to-Panel Model	Price
<b>15" Drop</b>		
18"	<b>AH1518PS</b>	\$129
24"	<b>AH1524PS</b>	129
30"	<b>AH1530PS</b>	129
36"	<b>AH1536PS</b>	129
42"	<b>AH1542PS</b>	129
48"	<b>AH1548PS</b>	129
60"	<b>AH1560PS</b>	129
<b>16" Drop</b>		
18"	<b>AH1618PS</b>	\$129
24"	<b>AH1624PS</b>	129
30"	<b>AH1630PS</b>	129
36"	<b>AH1636PS</b>	129
42"	<b>AH1642PS</b>	129
48"	<b>AH1648PS</b>	129
60"	<b>AH1660PS</b>	129
<b>17" Drop</b>		
18"	<b>AH1718PS</b>	\$137
24"	<b>AH1724PS</b>	137
30"	<b>AH1730PS</b>	137
36"	<b>AH1736PS</b>	137
42"	<b>AH1742PS</b>	137
48"	<b>AH1748PS</b>	137
60"	<b>AH1760PS</b>	137

To select the correct model number, determine 1) height of drop; 2) width of the lower panel.

Transitional profile is available in wood only.

### Standard Includes

- Vertical trim for taller panel
- Top cap for lower panel

### How to Specify

- 1 Model
- 2 Top cap material:  
**W** = Wood  
**P** = Paint
- 3 Top cap profile:  
**A** = Softened  
**C** = Square  
**T** = Transitional (wood only)
- 4 Top cap finish price group:  
**STD** = Group 1  
**STD M** = Group M (+10%)  
**STD2** = Group 2 (+20%)
- 5 Top cap finish designator


## Hi-Lo Trim Kits for Stackable Panels

For 19" to 22" Drops

Pricing

GSA SIN 711-1  
COM GSA Non-Contract

Features	➤ See page 23
Product Information	35
Application Guidelines	36
Power & Data Overview	38



Panel-to-Panel

<i>Width of Lower Panel</i>	<b>Panel-to-Panel</b> <i>Model</i>	<i>Price</i>
<b>19" Drop</b>		
18"	<b>AH1918PS</b>	\$137
24"	<b>AH1924PS</b>	137
30"	<b>AH1930PS</b>	137
36"	<b>AH1936PS</b>	137
42"	<b>AH1942PS</b>	137
48"	<b>AH1948PS</b>	137
60"	<b>AH1960PS</b>	137
<b>21" Drop</b>		
18"	<b>AH2118PS</b>	\$137
24"	<b>AH2124PS</b>	137
30"	<b>AH2130PS</b>	137
36"	<b>AH2136PS</b>	137
42"	<b>AH2142PS</b>	137
48"	<b>AH2148PS</b>	137
60"	<b>AH2160PS</b>	137
<b>22" Drop</b>		
18"	<b>AH2218PS</b>	\$137
24"	<b>AH2224PS</b>	137
30"	<b>AH2230PS</b>	137
36"	<b>AH2236PS</b>	137
42"	<b>AH2242PS</b>	137
48"	<b>AH2248PS</b>	137
60"	<b>AH2260PS</b>	137

To select the correct model number, determine 1) height of drop; 2) width of the lower panel.

Transitional profile is available in wood only.

### Standard Includes

- Vertical trim for taller panel
- Top cap for lower panel

### How to Specify

- 1 Model
- 2 Top cap material:  
**W** = Wood  
**P** = Paint
- 3 Top cap profile:  
**A** = Softened  
**C** = Square  
**T** = Transitional (wood only)
- 4 Top cap finish price group:  
**STD** = Group 1  
**STD M** = Group M (+10%)  
**STD2** = Group 2 (+20%)
- 5 Top cap finish designator


## Hi-Lo Trim Kits for Stackable Panels

For 24" to 28" Drops

Pricing

GSA SIN 711-1  
COM GSA Non-Contract

Features	➤ See page 23
Product Information	35
Application Guidelines	36
Power & Data Overview	38



Panel-to-Panel

<i>Width of Lower Panel</i>	<b>Panel-to-Panel</b> <i>Model</i>	<i>Price</i>
<b>24" Drop</b>		
18"	<b>AH2418PS</b>	\$150
24"	<b>AH2424PS</b>	150
30"	<b>AH2430PS</b>	150
36"	<b>AH2436PS</b>	150
42"	<b>AH2442PS</b>	150
48"	<b>AH2448PS</b>	150
60"	<b>AH2460PS</b>	150
<b>26" Drop</b>		
18"	<b>AH2618PS</b>	\$150
24"	<b>AH2624PS</b>	150
30"	<b>AH2630PS</b>	150
36"	<b>AH2636PS</b>	150
42"	<b>AH2642PS</b>	150
48"	<b>AH2648PS</b>	150
60"	<b>AH2660PS</b>	150
<b>28" Drop</b>		
18"	<b>AH2818PS</b>	\$153
24"	<b>AH2824PS</b>	153
30"	<b>AH2830PS</b>	153
36"	<b>AH2836PS</b>	153
42"	<b>AH2842PS</b>	153
48"	<b>AH2848PS</b>	153
60"	<b>AH2860PS</b>	153

To select the correct model number, determine 1) height of drop; 2) width of the lower panel

Transitional profile is available in wood only.

### Standard Includes

- Vertical trim for taller panel
- Top cap for lower panel

### How to Specify

- ① Model
- ② Top cap material:  
**W** = Wood  
**P** = Paint
- ③ Top cap profile:  
**A** = Softened  
**C** = Square  
**T** = Transitional (wood only)
- ④ Top cap finish price group:  
**STD** = Group 1  
**STD<sub>M</sub>** = Group M (+10%)  
**STD<sub>2</sub>** = Group 2 (+20%)
- ⑤ Top cap finish designator




## Hi-Lo Trim Kits for Stackable Panels

For 29" to 33" Drops

Pricing

GSA SIN 711-1  
COM GSA Non-Contract

Features	➤ See page 23
Product Information	35
Application Guidelines	36
Power & Data Overview	38



<i>Width of Lower Panel</i>	<i>Panel-to-Panel Model</i>	<i>Price</i>
<b>29" Drop</b>		
18"	<b>AH2918PS</b>	\$153
24"	<b>AH2924PS</b>	153
30"	<b>AH2930PS</b>	153
36"	<b>AH2936PS</b>	153
42"	<b>AH2942PS</b>	153
48"	<b>AH2948PS</b>	153
60"	<b>AH2960PS</b>	153
<b>31" Drop</b>		
18"	<b>AH3118PS</b>	\$155
24"	<b>AH3124PS</b>	155
30"	<b>AH3130PS</b>	155
36"	<b>AH3136PS</b>	155
42"	<b>AH3142PS</b>	155
48"	<b>AH3148PS</b>	155
60"	<b>AH3160PS</b>	155
<b>33" Drop</b>		
18"	<b>AH3318PS</b>	\$158
24"	<b>AH3324PS</b>	158
30"	<b>AH3330PS</b>	158
36"	<b>AH3336PS</b>	158
42"	<b>AH3342PS</b>	158
48"	<b>AH3348PS</b>	158
60"	<b>AH3360PS</b>	158

To select the correct model number, determine 1) height of drop; 2) width of the lower panel.

Transitional profile is available in wood only.

### Standard Includes

- Vertical trim for taller panel
- Top cap for lower panel

### How to Specify

- ① Model
- ② Top cap material:  
**W** = Wood  
**P** = Paint
- ③ Top cap profile:  
**A** = Softened  
**C** = Square  
**T** = Transitional (wood only)
- ④ Top cap finish price group:  
**STD** = Group 1  
**STD M** = Group M (+10%)  
**STD2** = Group 2 (+20%)
- ⑤ Top cap finish designator


## Hi-Lo Trim Kits for Stackable Panels

For 34" to 38" Drops

Pricing

GSA SIN 711-1  
COM GSA Non-Contract

Features	➤ See page 23
Product Information	35
Application Guidelines	36
Power & Data Overview	38



<i>Width of Lower Panel</i>	<i>Panel-to-Panel Model</i>	<i>Price</i>
<b>34" Drop</b>		
18"	<b>AH3418PS</b>	\$158
24"	<b>AH3424PS</b>	158
30"	<b>AH3430PS</b>	158
36"	<b>AH3436PS</b>	158
42"	<b>AH3442PS</b>	158
48"	<b>AH3448PS</b>	158
60"	<b>AH3460PS</b>	158
<b>36" Drop</b>		
18"	<b>AH3618PS</b>	\$166
24"	<b>AH3624PS</b>	166
30"	<b>AH3630PS</b>	166
36"	<b>AH3636PS</b>	166
42"	<b>AH3642PS</b>	166
48"	<b>AH3648PS</b>	166
60"	<b>AH3660PS</b>	166
<b>38" Drop</b>		
18"	<b>AH3818PS</b>	\$170
24"	<b>AH3824PS</b>	170
30"	<b>AH3830PS</b>	170
36"	<b>AH3836PS</b>	170
42"	<b>AH3842PS</b>	170
48"	<b>AH3848PS</b>	170
60"	<b>AH3860PS</b>	170

To select the correct model number, determine 1) height of drop; 2) width of the lower panel.

Transitional profile is available in wood only.

### Standard Includes

- Vertical trim for taller panel
- Top cap for lower panel

### How to Specify

- ① Model
- ② Top cap material:  
**W** = Wood  
**P** = Paint
- ③ Top cap profile:  
**A** = Softened  
**C** = Square  
**T** = Transitional (wood only)
- ④ Top cap finish price group:  
**STD** = Group 1  
**STD M** = Group M (+10%)  
**STD2** = Group 2 (+20%)
- ⑤ Top cap finish designator


## Hi-Lo Trim Kits for Stackable Panels

For 40" to 43" Drops

Pricing

GSA SIN 711-1  
COM GSA Non-Contract

Features	➤ See page 23
Product Information	35
Application Guidelines	36
Power & Data Overview	38



Panel-to-Panel

<i>Width of Lower Panel</i>	<i>Panel-to-Panel Model</i>	<i>Price</i>
<b>40" Drop</b>		
18"	<b>AH4018PS</b>	\$185
24"	<b>AH4024PS</b>	185
30"	<b>AH4030PS</b>	185
36"	<b>AH4036PS</b>	185
42"	<b>AH4042PS</b>	185
48"	<b>AH4048PS</b>	185
60"	<b>AH4060PS</b>	185
<b>41" Drop</b>		
18"	<b>AH4118PS</b>	\$185
24"	<b>AH4124PS</b>	185
30"	<b>AH4130PS</b>	185
36"	<b>AH4136PS</b>	185
42"	<b>AH4142PS</b>	185
48"	<b>AH4148PS</b>	185
60"	<b>AH4160PS</b>	185
<b>43" Drop</b>		
18"	<b>AH4318PS</b>	\$199
24"	<b>AH4324PS</b>	199
30"	<b>AH4330PS</b>	199
36"	<b>AH4336PS</b>	199
42"	<b>AH4342PS</b>	199
48"	<b>AH4348PS</b>	199
60"	<b>AH4360PS</b>	199

To select the correct model number, determine 1) height of drop; 2) width of the lower panel.

Transitional profile is available in wood only.

### Standard Includes

- Vertical trim for taller panel
- Top cap for lower panel

### How to Specify

- ① Model
- ② Top cap material:  
**W** = Wood  
**P** = Paint
- ③ Top cap profile:  
**A** = Softened  
**C** = Square  
**T** = Transitional (wood only)
- ④ Top cap finish price group:  
**STD** = Group 1  
**STD M** = Group M (+10%)  
**STD2** = Group 2 (+20%)
- ⑤ Top cap finish designator


## Hi-Lo Trim Kits for Stackable Panels

For 45" to 50" Drops

Pricing

GSA SIN 711-1  
COM GSA Non-Contract

Features	➤ See page 23
Product Information	35
Application Guidelines	36
Power & Data Overview	38



Panel-to-Panel

<i>Width of Lower Panel</i>	<i>Panel-to-Panel Model</i>	<i>Price</i>
<b>45" Drop</b>		
18"	<b>AH4518PS</b>	\$209
24"	<b>AH4524PS</b>	209
30"	<b>AH4530PS</b>	209
36"	<b>AH4536PS</b>	209
42"	<b>AH4542PS</b>	209
48"	<b>AH4548PS</b>	209
60"	<b>AH4560PS</b>	209
<b>48" Drop</b>		
18"	<b>AH4818PS</b>	\$220
24"	<b>AH4824PS</b>	220
30"	<b>AH4830PS</b>	220
36"	<b>AH4836PS</b>	220
42"	<b>AH4842PS</b>	220
48"	<b>AH4848PS</b>	220
60"	<b>AH4860PS</b>	220
<b>50" Drop</b>		
18"	<b>AH5018PS</b>	\$232
24"	<b>AH5024PS</b>	232
30"	<b>AH5030PS</b>	232
36"	<b>AH5036PS</b>	232
42"	<b>AH5042PS</b>	232
48"	<b>AH5048PS</b>	232
60"	<b>AH5060PS</b>	232

To select the correct model number, determine 1) height of drop; 2) width of the lower panel.

Transitional profile is available in wood only.

### Standard Includes

- Vertical trim for taller panel
- Top cap for lower panel

### How to Specify

- ① Model
- ② Top cap material:  
**W** = Wood  
**P** = Paint
- ③ Top cap profile:  
**A** = Softened  
**C** = Square  
**T** = Transitional (wood only)
- ④ Top cap finish price group:  
**STD** = Group 1  
**STD M** = Group M (+10%)  
**STD2** = Group 2 (+20%)
- ⑤ Top cap finish designator


## Hi-Lo Trim Kits for Stackable Panels

For 52" to 55" Drops

Pricing

GSA SIN 711-1  
COM GSA Non-Contract

Features	➤ See page 23
Product Information	35
Application Guidelines	36
Power & Data Overview	38



Width of Lower Panel	Panel-to-Panel Model	Price
<b>52" Drop</b>		
18"	AH5218PS	\$234
24"	AH5224PS	234
30"	AH5230PS	234
36"	AH5236PS	234
42"	AH5242PS	234
48"	AH5248PS	234
60"	AH5260PS	234
<b>53" Drop</b>		
18"	AH5318PS	\$234
24"	AH5324PS	234
30"	AH5330PS	234
36"	AH5336PS	234
42"	AH5342PS	234
48"	AH5348PS	234
60"	AH5360PS	234
<b>55" Drop</b>		
18"	AH5518PS	\$241
24"	AH5524PS	241
30"	AH5530PS	241
36"	AH5536PS	241
42"	AH5542PS	241
48"	AH5548PS	241
60"	AH5560PS	241

To select the correct model number, determine 1) height of drop; 2) width of the lower panel.

Transitional profile is available in wood only.

### Standard Includes

- Vertical trim for taller panel
- Top cap for lower panel

### How to Specify

- ① Model
- ② Top cap material:  
**W** = Wood  
**P** = Paint
- ③ Top cap profile:  
**A** = Softened  
**C** = Square  
**T** = Transitional (wood only)
- ④ Top cap finish price group:  
**STD** = Group 1  
**STD M** = Group M (+10%)  
**STD2** = Group 2 (+20%)
- ⑤ Top cap finish designator

## Hi-Lo Trim Kits for Stackable Panels

For 57" to 62" Drops

Pricing

GSA SIN 711-1  
COM GSA Non-Contract


Features	➤ See page 23
Product Information	35
Application Guidelines	36
Power & Data Overview	38

### Standard Includes

- Vertical trim for taller panel
- Top cap for lower panel

### How to Specify

- ① Model
- ② Top cap material:  
**W** = Wood  
**P** = Paint
- ③ Top cap profile:  
**A** = Softened  
**C** = Square  
**T** = Transitional (wood only)
- ④ Top cap finish price group:  
**STD** = Group 1  
**STD M** = Group M (+10%)  
**STD2** = Group 2 (+20%)
- ⑤ Top cap finish designator



Width of Lower Panel	Panel-to-Panel Model	Price
<b>57" Drop</b>		
18"	<b>AH5718PS</b>	\$241
24"	<b>AH5724PS</b>	241
30"	<b>AH5730PS</b>	241
36"	<b>AH5736PS</b>	241
42"	<b>AH5742PS</b>	241
48"	<b>AH5748PS</b>	241
60"	<b>AH5760PS</b>	241
<b>60" Drop</b>		
18"	<b>AH6018PS</b>	\$248
24"	<b>AH6024PS</b>	248
30"	<b>AH6030PS</b>	248
36"	<b>AH6036PS</b>	248
42"	<b>AH6042PS</b>	248
48"	<b>AH6048PS</b>	248
60"	<b>AH6060PS</b>	248
<b>62" Drop</b>		
18"	<b>AH6218PS</b>	\$248
24"	<b>AH6224PS</b>	248
30"	<b>AH6230PS</b>	248
36"	<b>AH6236PS</b>	248
42"	<b>AH6242PS</b>	248
48"	<b>AH6248PS</b>	248
60"	<b>AH6260PS</b>	248

To select the correct model number, determine 1) height of drop; 2) width of the lower panel

Transitional profile is available in wood only.


## Hi-Lo Trim Kits for Stackable Panels

For 64" to 69" Drops

Pricing

GSA SIN 711-1  
COM GSA Non-Contract

Features	➤ See page 23
Product Information	35
Application Guidelines	36
Power & Data Overview	38



<i>Width of Lower Panel</i>	<i>Panel-to-Panel Model</i>	<i>Price</i>
<b>64" Drop</b>		
18"	<b>AH6418PS</b>	\$259
24"	<b>AH6424PS</b>	259
30"	<b>AH6430PS</b>	259
36"	<b>AH6436PS</b>	259
42"	<b>AH6442PS</b>	259
48"	<b>AH6448PS</b>	259
60"	<b>AH6460PS</b>	259
<b>67" Drop</b>		
18"	<b>AH6718PS</b>	\$259
24"	<b>AH6724PS</b>	259
30"	<b>AH6730PS</b>	259
36"	<b>AH6736PS</b>	259
42"	<b>AH6742PS</b>	259
48"	<b>AH6748PS</b>	259
60"	<b>AH6760PS</b>	259
<b>69" Drop</b>		
18"	<b>AH6918PS</b>	\$259
24"	<b>AH6924PS</b>	259
30"	<b>AH6930PS</b>	259
36"	<b>AH6936PS</b>	259
42"	<b>AH6942PS</b>	259
48"	<b>AH6948PS</b>	259
60"	<b>AH6960PS</b>	259

To select the correct model number, determine 1) height of drop; 2) width of the lower panel.

Transitional profile is available in wood only.

### Standard Includes

- Vertical trim for taller panel
- Top cap for lower panel

### How to Specify

- 1 Model
- 2 Top cap material:  
**W** = Wood  
**P** = Paint
- 3 Top cap profile:  
**A** = Softened  
**C** = Square  
**T** = Transitional (wood only)
- 4 Top cap finish price group:  
**STD** = Group 1  
**STD M** = Group M (+10%)  
**STD2** = Group 2 (+20%)
- 5 Top cap finish designator


## Hi-Lo Trim Kits for Stackable Panels

For 74" to 81" Drops

Pricing

GSA SIN 711-1  
COM GSA Non-Contract

Features	➤ See page 23
Product Information	35
Application Guidelines	36
Power & Data Overview	38



<i>Width of Lower Panel</i>	<i>Panel-to-Panel Model</i>	<i>Price</i>
<b>74" Drop</b>		
18"	<b>AH7418PS</b>	\$268
24"	<b>AH7424PS</b>	268
30"	<b>AH7430PS</b>	268
36"	<b>AH7436PS</b>	268
42"	<b>AH7442PS</b>	268
48"	<b>AH7448PS</b>	268
60"	<b>AH7460PS</b>	268
<b>76" Drop</b>		
18"	<b>AH7618PS</b>	\$268
24"	<b>AH7624PS</b>	268
30"	<b>AH7630PS</b>	268
36"	<b>AH7636PS</b>	268
42"	<b>AH7642PS</b>	268
48"	<b>AH7648PS</b>	268
60"	<b>AH7660PS</b>	268
<b>81" Drop</b>		
18"	<b>AH8118PS</b>	\$331
24"	<b>AH8124PS</b>	331
30"	<b>AH8130PS</b>	331
36"	<b>AH8136PS</b>	331
42"	<b>AH8142PS</b>	331
48"	<b>AH8148PS</b>	331
60"	<b>AH8160PS</b>	331

To select the correct model number, determine 1) height of drop; 2) width of the lower panel.

Transitional profile is available in wood only.

### Standard Includes

- Vertical trim for taller panel
- Top cap for lower panel

### How to Specify

- ① Model
- ② Top cap material:  
**W** = Wood  
**P** = Paint
- ③ Top cap profile:  
**A** = Softened  
**C** = Square  
**T** = Transitional (wood only)
- ④ Top cap finish price group:  
**STD** = Group 1  
**STD M** = Group M (+10%)  
**STD2** = Group 2 (+20%)
- ⑤ Top cap finish designator




## Hi-Lo Trim Kits for Stackable Panels

For 88" Drop

Pricing

GSA SIN 711-1  
COM GSA Non-Contract

Features	➤ See page 23
Product Information	35
Application Guidelines	36
Power & Data Overview	38




Panel-to-Panel

<i>Width of Lower Panel</i>	<b>Panel-to-Panel</b> <i>Model</i>	<i>Price</i>
<b>88" Drop</b>		
18"	<b>AH8818PS</b>	\$359
24"	<b>AH8824PS</b>	359
30"	<b>AH8830PS</b>	359
36"	<b>AH8836PS</b>	359
42"	<b>AH8842PS</b>	359
48"	<b>AH8848PS</b>	359
60"	<b>AH8860PS</b>	359

Related Product:

<i>Model</i>	<i>Price</i>
<b>Hook Bracket</b>	
<b>ATET</b>	\$26



To select the correct model number, determine 1) height of drop; 2) width of the lower panel.

Transitional profile is available in wood only.

Certain applications require additional ATET brackets.

➤ See page 37 for bracketry guidelines.

### Standard Includes

- Vertical trim for taller panel
- Top cap for lower panel

### How to Specify

#### Hi-Lo Trim Kit

- 1 Model
- 2 Top cap material:  
**W** = Wood  
**P** = Paint
- 3 Top cap profile:  
**A** = Softened  
**C** = Square  
**T** = Transitional (wood only)
- 4 Top cap finish price group:  
**STD** = Group 1  
**STD<sub>M</sub>** = Group M (+10%)  
**STD<sub>2</sub>** = Group 2 (+20%)
- 5 Top cap finish designator

#### Hook Bracket

- 1 Model

## Connector Top Cap/Bracket Assemblies

For Stacking Applications

Pricing

GSA SIN 711-1


Features	➤ See page 23
Product Information	33
Application Guidelines	36
Power & Data Overview	38

### Standard Includes


- Top cap/bracket assembly

### How to Specify


- 1 Model
- 2 Top cap profile
  - A** = Softened (shown)
  - C** = Square
  - T** = Transitional (wood only)
- 3 Top cap material:
  - W** = Wood
  - P** = Paint (available on softened and square profiles only)
- 4 Top cap finish price group:
  - STD** = Group 1
  - STD<sub>M</sub>** = Group M (+10%)
  - STD<sub>2</sub>** = Group 2 (+20%)
- 5 Top cap finish designator




Model	Wood or Paint
<b>Square L Top Cap</b>	
ATL	\$63




<b>Radius L Top Cap</b>	
ATR	\$63



<b>T Top Cap</b>	
ATT	\$63



<b>X Top Cap</b>	
ATX	\$63



<b>S Top Cap</b>	
ATS	\$63

**IMPORTANT:** When specifying a stackable connector that is different than the base, the appropriate top cap/bracket assembly must be specified separately.







Stackable Connectors  
➤ See pages 79–81.





# Connector Top Cap/Bracket Assemblies

Pricing

For Connector-to-Panel Hi-Lo Applications

GSA SIN 711-1

Model	Description	Price
<b>Two-Way Hi-Lo Applications</b>		
 <b>ATLE</b>	90°, square edge	\$63
 <b>ATRE</b>	90°, radius edge	\$63
 <b>ATSE</b>	180°	\$63
<b>Three-Way Hi-Lo Applications</b>		
 <b>ATTL</b>	90°; one low, two high	\$63
 <b>ATTE</b>	90°; two low, one high	\$63
 <b>ATTS</b>	90°; one low, two high (opposite each other)	\$63

Model	Description	Price
<b>Four-Way Hi-Lo Applications</b>		
 <b>ATXE</b>	90°; three low, one high	\$63
 <b>ATXL</b>	90°; two low, two high	\$63
 <b>ATXS</b>	90°; two low, two high (opposite each other)	\$63
 <b>ATXT</b>	90°; one low, three high	\$63

The top cap that is standard with a connector will not work in an application where a connector-to-panel hi-lo trim kit is used. The bracket assemblies on the models on this page are different and designed specifically for the hi-lo applications shown.

**IMPORTANT:** Connector top cap/bracket assemblies for use in hi-lo applications must be specified separately.

Features	➤ See page 23
Product Information	33
Application Guidelines	36
Power & Data Overview	38

## Standard Includes

- Top cap/bracket assembly

## How to Specify

- 1 Model
- 2 Top cap profile  
**A** = Softened  
**C** = Square  
**T** = Transitional (wood only)
- 3 Top cap material:  
**W** = Wood  
**P** = Paint (available on softened and square profiles only)
- 4 Top cap finish price group:  
**STD** = Group 1  
**STD<sub>M</sub>** = Group M (+10%)  
**STD<sub>2</sub>** = Group 2 (+20%)
- 5 Top cap finish designator



## Standard 8-Wire Electrical Components

Pricing

4-Circuit

GSA SIN 711-1  
COM GSA Non-Contract

Features	➤ See page 23
Power & Data Overview	38
Product Information	39
Standard 8-Wire System	42



Model	Description	Function	Price
<b>Power Distribution Assemblies</b>			
<b>AED18</b>	For 18"W panel	Passes power through panel; does not accept receptacles	\$184
<b>AED24</b>	For 24"W panel	Carries power to receptacles	184
<b>AED30</b>	For 30"W panel	Carries power to receptacles	184
<b>AED36</b>	For 36"W panel	Carries power to receptacles	184
<b>AED42</b>	For 42"W panel	Carries power to receptacles	184
<b>AED48</b>	For 48"W panel	Carries power to receptacles	184
<b>AED60</b>	For 60"W panel	Carries power to receptacles	184
<b>Jumper Cables</b>			
<b>AEJ1</b>	Panel to panel	Routes power panel to panel; base or mid-wireway	\$92
<b>AEJ2</b>	At 90° corner	Routes power panel to panel thru 90° corner; base or mid-wireway	92
<b>AEJ3</b>	At 120° corner	Routes power panel to panel thru 120° corner; base or mid-wireway	92
<b>AEJ5</b>	Straight thru a connector	Routes power panel to panel straight thru connector; base or mid-wireway	92
<b>AEJ7</b>	At mid-wireway X connector	Routes power panel to panel through X connector at the mid-wireway	92
<b>AET2</b>	From base to mid-wireway	Routes power from base wireway to mid-wireway	157

### Standard Includes

- Power distribution assembly or jumper cable

### How to Specify

- ① Model
- ② Type of electrical system:  
**84** = 8-wire, 4-circuit

Power distribution assemblies accommodate up to 4 receptacles.

# Standard 8-Wire Electrical Components

Pricing



4-Circuit

GSA SIN 711-1  
COM GSA Non-Contract

Features	➤ See page 23
Power & Data Overview	38
Product Information	40
Standard 8-Wire System	42



Model	Description	Function	Price
<b>Duplex Receptacles</b>			
<b>For 3 and 1 Circuit Configuration</b>			
<b>AER1</b>	Circuit 1	Delivers power from circuit 1 with shared neutral and ground	\$31
<b>AER2</b>	Circuit 2	Delivers power from circuit 2 with shared neutral and ground	31
<b>AER3</b>	Circuit 3	Delivers power from circuit 3 with shared neutral and ground	31
<b>AER4</b>	Circuit 4 (dedicated)	Delivers power from dedicated circuit 4 with dedicated neutral and ground	31
<b>For 2 and 2 Circuit Configuration</b>			
<b>AER1</b>	Circuit 1	Delivers power from circuit 1 with shared neutral and ground	\$31
<b>AER2</b>	Circuit 2	Delivers power from circuit 2 with shared neutral and ground	31
<b>AER4</b>	Circuit 4 (Computer desig.)	Delivers power from desig. circuit 4 with shared neutral and ground	31
<b>AER5</b>	Circuit 5 (Computer desig.)	Delivers power from desig. circuit 5 with shared neutral and ground	31
<b>Floor Power Entry</b>			
<b>AEF1U</b>	Base power entry, 8-wire	Provides access to power in the floor or wall. 1½" trade size x 66"L, actual outside diameter is 7/16".	\$279



<b>Ceiling Power Entry Assembly</b>			
<b>AEC1</b>	Ceiling power entry, 8-wire	Provides access to power in the ceiling.	\$342

Ceiling power entry panel must be ordered separately.  
➤ See page 56 for ceiling power panel.  
➤ See page 66 for stackable ceiling power panel.

Access to ceiling power source is regulated by National Code to maximum 12 ft. conduit.

Power distribution assemblies accommodate up to 4 receptacles.

- Standard Includes**
- Receptacle or power entry
  - Junction box with ceiling power entry model

- How to Specify**
- Duplex Receptacles**
- 1 Model
  - 2 Type of electrical system:  
**84** = 8-wire, 4-circuit
  - 3 Finish designator:  
**462** = Cinder  
**497** = Clear  
**498** = Orange (available on AER4 & AER5 only)  
**420** = Sandstone  
**460** = Storm
- Power Entries**
- 1 Model
  - 2 Type of electrical system:  
**84** = 8-wire, 4-circuit



# Enhanced 10-Wire Electrical Components

Pricing

4-Circuit and 6-Circuit

GSA SIN 711-1

Features	➤ See page 23
Power & Data Overview	38
Product Information	39
Enhanced 10-Wire System	43



Model	Description	Function	Price
<b>Power Distribution Assemblies</b>			
<b>AED18</b>	For 18"W panel	Passes power through panel; does not accept receptacles	\$184
<b>AED24</b>	For 24"W panel	Carries power to receptacles	184
<b>AED30</b>	For 30"W panel	Carries power to receptacles	184
<b>AED36</b>	For 36"W panel	Carries power to receptacles	184
<b>AED42</b>	For 42"W panel	Carries power to receptacles	184
<b>AED48</b>	For 48"W panel	Carries power to receptacles	184
<b>AED60</b>	For 60"W panel	Carries power to receptacles	184
<b>Jumper Cables</b>			
<b>AEJ1</b>	From panel to panel	Routes power panel to panel; base or mid-wireway	\$92
<b>AEJ2</b>	At 90° corner	Routes power panel to panel through 90° corner; base or mid-wireway	92
<b>AEJ3</b>	At 120° corner	Routes power panel to panel through 120° corner; base or mid-wireway	92
<b>AEJ5</b>	Straight thru connector	Routes power panel to panel straight thru connector; base or mid-wireway	92
<b>AEJ7</b>	At mid-wireway X connector	Routes power panel to panel through X connector at the mid-wireway	92
<b>AET2</b>	From base to mid-wireway	Routes power from base wireway to mid-wireway	157
<b>Duplex Receptacles</b>			
<b>For 2 and 2 Circuit Configuration (4-circuit)</b>			
<b>AER1</b>	Circuit 1	Delivers power from circuit 1 with separate neutral and shared ground	\$31
<b>AER2</b>	Circuit 2	Delivers power from circuit 2 with separate neutral and shared ground	31
<b>AER3</b>	Circuit 3 (Computer desig.)	Delivers power from desig. circuit 3 with sep. neutral and shared ground	31
<b>AER4</b>	Circuit 4 (Computer desig.)	Delivers power from desig. circuit 4 with sep. neutral and shared ground	31
<b>For 3 and 3 Circuit Configuration (6-circuit)</b>			
<b>AER1</b>	Circuit 1	Delivers power from circuit 1 with shared neutral and ground	\$31
<b>AER2</b>	Circuit 2	Delivers power from circuit 2 with shared neutral and ground	31
<b>AER3</b>	Circuit 3	Delivers power from circuit 3 with shared neutral and ground	31
<b>AER4</b>	Circuit 4 (Computer desig.)	Delivers power from desig. circuit 4 with shared neutral and ground	31
<b>AER5</b>	Circuit 5 (Computer desig.)	Delivers power from desig. circuit 5 with shared neutral and ground	31
<b>AER6</b>	Circuit 6 (Computer desig.)	Delivers power from desig. circuit 6 with shared neutral and ground	31

Power distribution assemblies accommodate up to 4 receptacles.

## Standard Includes

- Power distribution assembly, jumper cable or receptacle

## How to Specify

### Power Distributions and Jumper Cables

- 1 Model
- 2 Type of electrical system:  
**104** = 10-wire, 4-circuit  
**106** = 10-wire, 6-circuit

### Duplex Receptacles



- 1 Model
- 2 Type of electrical system:  
**104** = 10-wire, 4-circuit (not available on AER5 or AER6)  
**106** = 10-wire, 6-circuit
- 3 Finish designator:  
**462** = Cinder  
**497** = Clear  
**498** = Orange (available on AER3, AER4, & AER5 only)

# Enhanced 10-Wire Electrical Components

Pricing

4-Circuit and 6-Circuit

GSA SIN 711-1



Model	Description	Function	Price
<b>Floor Power Entry</b>			
AEF1L	Left entry (shown)	Provides access to power in the floor or wall	\$279
AEF1R	Right entry	Provides access to power in the floor or wall	279
<b>Ceiling Power Entry Assembly</b>			
AEC1	Ceiling power entry, 10-wire	Provides access to power in the ceiling	\$342

Floor power entry conduit is 3/4" trade size x 66"L, actual outside diameter is 1 1/16".

Floor or ceiling power entry eliminates one receptacle location.

Ceiling power entry panel must be ordered separately  
➤ See page 56 for ceiling power panel.  
➤ See page 66 for stackable ceiling power panel.

Access to ceiling power source is regulated by National Code to 12 ft. maximum conduit.

Features	➤ See page 23
Power & Data Overview	38
Product Information	40
Enhanced 10-Wire System	43


## Standard Includes

- Power entry
- Junction box with ceiling power entry model

## How to Specify

- ① Model
- ② Type of electrical system:  
104 = 10-wire, 4-circuit  
106 = 10-wire, 6-circuit

Features	➤ See page 23
Power & Data Overview	38
Product Information	41
Enhanced 10-Wire System	43



Model	Description	Function	Price
<b>Standard 8-Wire Special Power Entries</b>			
<b>AEF2</b>	36" to 60" wide panels, 8-wire configuration; attaches to distribution assembly, not included; eliminates two receptacles in 36" wide panel, eliminates one receptacle in 42", 48", and 60" wide panels.	Attaches to power distribution assembly Does not accept receptacles in 36" to 60" wide panels to provide access to power in the base.	\$454
<b>AEF3</b>	24" wide panel, 8-wire configuration; replaces distribution assembly, eliminates all receptacles, passes power one direction only per code.	Replaces power distribution assembly in 24" wide panel to provide access to power in the base.	454
<b>AEF5</b>	30" wide panel, 8-wire configuration; replaces distribution assembly, eliminates all receptacles, passes power one direction, additional conduit jumper can be specified separately to pass power bi-directionally.	Replaces power distribution assembly in 30" wide panel to provide access to power in the base.	454
<b>Enhanced 10-Wire Special Power Entries</b>			
<b>AEF3</b>	24" wide panel, 10-wire configuration; replaces distribution assembly, eliminates all receptacles, passes power one direction only per code.	Replaces power distribution assembly in 24" wide panel to provide access to power in the base.	\$454
<b>AEF5</b>	30" wide panel, 10-wire configuration; replaces distribution assembly, eliminates all receptacles, passes power one direction, additional conduit jumper can be specified separately to pass power bi-directionally.	Replaces power distribution assembly in 30" wide panel to provide access to power in the base.	454
<b>AEF6</b>	36" wide panel, 10-wire configuration; replaces distribution assembly, eliminates two receptacles, passes power one direction, and accepts jumper on opposite end.	Replaces power distribution assembly in 36" wide panel to provide access to power in the base.	706
<b>AEF7</b>	42" to 60" wide panel, 10-wire configuration; replaces distribution assembly.	Replaces power distribution assembly in 42" to 60" wide panels to provide access to power in the base.	706

IMPORTANT: Special power entry is required for New York City application. Consult local electrical codes prior to specification.

Panels must be specified as non-powered.

Specify electrical jumper assembly model 1208839 (service part) for use with AEF3 or AEF5 to pass power bi-directionally.

Specify electrical jumper assembly model 1156015 (service part) for 6-circuit or model 1156016 for 4-circuit to pass power bi-directionally on enhanced 10-wire system.

## Standard Includes

- Power entry

## How to Specify

### 8-Wire Electrical System


- ① Model
- ② **84** = 8-wire, 4-circuit

### 10-Wire Electrical System

- ① Model
- ② **104** = 10-wire, 4-circuit  
**106** = 10-wire, 6-circuit







Features	➤ See page 23
Power & Data Overview	38
Product Information	41
Enhanced 10-Wire System	43



AEHB1R

AEHB2A



Model	Description	Function	Price
-------	-------------	----------	-------

## Hardwire Box Assemblies

### Single

<b>AEHB1L</b>	Left		\$127
<b>AEHB1R</b>	Right		127

### Double

<b>AEHB2A</b>	Alternating		\$135
<b>AEHB2R</b>	Right		135

## Branching Conduit

<b>AEHJ1</b>	For 36"L hardwire jumper	Used between boxes and panel-to-panel	\$52
<b>AEHJ2</b>	For 48"L hardwire jumper	Used between boxes and panel-to-panel	60
<b>AEHJ3</b>	For 60"L hardwire jumper	Used between boxes and panel-to-panel	69
<b>AEHJ4</b>	For 84"L hardwire jumper	Used between boxes and panel-to-panel	77

## Ceiling Power Entry Conduit

<b>AEC2</b>			\$213
-------------	--	--	-------

## Duplex Receptacle Cover Plate

<b>AEHCP</b>			\$17
--------------	--	--	------

## Blank Junction Box Cover Plate

<b>AEHCB</b>	Covers junction or power entry boxes		\$13
	<i>Note: Cover plates from other sources will not fit properly.</i>		

Specify ceiling power entry panel separately.  
➤ See page 56 for ceiling power panel.  
➤ See page 66 for stackable ceiling power panel.

## Standard Includes

- Duplex receptacle or blank junction box cover plates: black only

## How to Specify

- 1 Model

## Communication Wireway Covers

Pricing

GSA SIN 711-1


Features	➤ See page 23
Power & Data Overview	38
Standard 8-Wire System	42
Enhanced 10-Wire System	43

### Standard Includes

- One communication opening, 1<sup>3</sup>/<sub>8</sub>"H x 2<sup>1</sup>/<sub>16</sub>"W
- Two standard receptacle openings

### How to Specify

- ① Model
- ② Finish price group:  
**STD** = Group 1  
**STD M** = Group M (+10%)
- ③ Finish designator



<i>D</i>	<i>W</i>	<i>H</i>	<i>Model</i>	<i>Price</i>
<b>Communication Wireway Covers</b>				
1/2"	30"	4 <sup>3</sup> / <sub>8</sub> "	<b>ARPJ30A</b>	\$70
	36		<b>ARPJ36A</b>	72
	42		<b>ARPJ42A</b>	77
	48		<b>ARPJ48A</b>	78
	60		<b>ARPJ60A</b>	85

IMPORTANT: Contact your local data/ communication supplier for the appropriate connector modules.

## Vertical Cable Managers

Pricing

GSA SIN 711-1



D	W	H	Model	Description	Price
<b>Black</b>					
1"	1"	16½"	<b>AVCM165B</b>	For use when mounting overheads 2" below the top of a 68" high panel.	\$14
		18½"	<b>AVCM185B</b>	For use when mounting overheads at the top of a 68" high panel.	17
<b>Fabric Covered</b>					
1"	1"	16½"	<b>AVCM165</b>	For use when mounting overheads 2" below the top of a 68" high panel.	\$33
		18½"	<b>AVCM185</b>	For use when mounting overheads at the top of a 68" high panel.	35

Specify vertical cable manager to correspond to panel and overhead being used.

When using standard- or reduced-size square, radius, curved, lunar, flat sliding-door, or bevel profile overheads on 68"H Cetra panels, specify model AVCM185.

Traxx vertical cable manager  
➤ See page 350.

Features	➤ See page 23
Power & Data Overview	38
Standard 8-Wire System	42
Enhanced 10-Wire System	43

### Standard Includes

- Vertical cable manager

### How to Specify

#### Black Vertical Cable Manager

- ① Model

#### Fabric-Covered Vertical Cable Manager


- ① Model
- ② Fabric grade
- ③ Fabric number

# Panel-Mount Tackboards & Markerboards


Pricing

GSA SIN 711-1  
COM GSA Non-Contract

Features	➤ See page 23
Power & Data Overview	38
Standard 8-Wire System	42
Enhanced 10-Wire System	43



<i>D</i>	<i>W</i>	<i>H</i>	<i>Model</i>	Panel Fabric Price Grade			<i>D</i>	<i>E</i>
				<i>A or COM</i>	<i>B</i>	<i>C</i>		
Tackboards								
1"	29 <sup>13</sup> / <sub>16</sub> "	13"	ATB3013	\$196	\$222	\$239	\$266	\$306
	35 <sup>13</sup> / <sub>16</sub> "		ATB3613	215	241	258	285	325
	41 <sup>13</sup> / <sub>16</sub> "		ATB4213	217	243	260	287	327
	47 <sup>13</sup> / <sub>16</sub> "		ATB4813	246	272	289	316	356
	29 <sup>13</sup> / <sub>16</sub> "	30"	ATB3030	273	299	316	343	383
	35 <sup>13</sup> / <sub>16</sub> "		ATB3630	289	315	332	359	399
	41 <sup>13</sup> / <sub>16</sub> "		ATB4230	295	321	338	365	405
	47 <sup>13</sup> / <sub>16</sub> "		ATB4830	299	325	342	369	409



<i>D</i>	<i>W</i>	<i>H</i>	<i>Model</i>	<i>Price</i>
<b>Markerboards</b>				
¾"	29 <sup>13</sup> / <sub>16</sub> "	30"	<b>AMB3030</b>	\$581
	35 <sup>13</sup> / <sub>16</sub> "		<b>AMB3630</b>	607
	41 <sup>13</sup> / <sub>16</sub> "		<b>AMB4230</b>	676
	47 <sup>13</sup> / <sub>16</sub> "		<b>AMB4830</b>	795
	59 <sup>13</sup> / <sub>16</sub> "	36"	<b>AMB6036</b>	985

A maximum of two tackboards may be panel mounted side by side.

13"H tackboards are recommended when using overheads on Cetra panels.

Expo or Expo2 dry erase markers are recommended for use on markerboards. Low-odor dry erase markers are not recommended, as they may leave undesirable results when erased.

## Standard Includes

- Tackboard (fabric) or markerboard (409M Icey White)
- Black tray on markerboard
- Mounting hardware

## How to Specify

### Tackboard

- ① Model
- ② Fabric grade
- ③ Fabric number

### Markerboard

- ① Model