Allsteel®

Concensys® System

SPECIFICATION AND PRICE LIST 2017

prices effective January 29

Concensys Panel System Cadence® Desking Essentials™ Storage Extensions™ Accessories

Concensys® System

Finishes

PAINTED METAL FINISHES

CORE COLORS GRADE P1	
Black	P27
Brownstone	P7I
Bungalow	P70
Carob	
Flint	P02
Fossil	P2
Loft	P71
Muslin	P4
Parchment	P9
S SELECT COLORS GRADE P2	
Brilliant White	PQ
Champagne Metallic	PR
Gunmetal Metallic	PR
Platinum Metallic	PR

PAINT COLOR INDICATORS

Pages in this pricer reference the following symbols:

CORE PAINTED METAL COLORS

S SELECT PAINTED METAL COLORS

Metallic paints, due to varying reflectance, may appear to have less visual color consistency than other paint finishes, even when L/A/B values are exactly the same. (L/A/B — measurable aspects of color — values are maintained within a specified range, to ensure consistent appearance of paint colors.)

METAL STORAGE PULLS

Black	E4
Matte Silver	FI

ELECTRICAL AND DATA COMPONENTS

E4
EY
EX
E9
EV
EU
EW

Recommended Coordinate Colors: Brilliant White use White EW Carob use Black E4 Champagne Metallic use Muslin EU Fossil use Flint E9 Gunmetal Metallic use Brownstone EY Parchment use Muslin EU Platinum Metallic use Loft EV

LAMINATES

0.0.2 =	
CORE	
Ash	
Brownstone*	LM13
Bungalow*	LM12
Camelstone	LT6A
Canyon Zephyr	LT5B
Desert Zephyr	LT5A
Flint*	LM16
Frosty White*	LM14
Grey Mesh	
Greystone	TM65
Loft*	LM11
Muslin*	LM15
Parchment	TM20
Pewter Mesh	LT8C
Sheer Mesh	LT8B
Silver Mesh	LT8D
White Tigris	LT2A
Whitestone	TM33
WOODGRAIN	
Natural Maple*	LWD
Shaker Cherry*	LW7C

GRADE L1

GRADE L2	
Amber Cherry*	LWAC
Beigewood*	LWBE
Branded Oak* NEW!	LBO1
Brazilwood*	LWBR
Columbian Walnut*	LWZ
Ebony Recon* NEW!	LER1
Fawn Cypress* NEW!	LFC1
Lowell Ash*	LLA1
Mangalore Mango* NEW!	LMM1
Natural Recon*	LNR1
Phantom Charcoal* NEW!	LPC1
Phantom Ecru*	LPE1
Portico Teak*	LPT1
Skyline Walnut*	LSW1
GRADE L3	

CDADEIA

Cafelle*	LWC
Charcoal Walnut*	LWCW
Natural Walnut*	LWNW

* Storage available in these 25 laminates.

EDGE COLORS

Amber Cherry	DA
Beigewood	DI
Black	E4
Brazilwood	DI
Branded Oak NEW!	BC
Brownstone	EY
Bungalow	EX
Cafelle	
Carob	E8
Charcoal Walnut	
Columbian Walnut	DZ
Ebony Recon NEW!	DR
Fawn Cypress NEW!	
Flint	E9
Fossil	
Loft	EV
Lowell Ash	DI
Mangalore Mango NEW!	MN
Muslin	
Natural Maple	DI
Natural Walnut	
Natural Recon	NF
Parchment	
Phantom Charcoal NEW!	
Phantom Ecru	PE
Platinum Metallic	EI
Plyband ◆	
Portico Teak	
Shaker Cherry	
Skyline Walnut	
White	

NOTE: \$33 upcharge on Woodgrain T-Mold.

◆ Edge is limited to flat edge surfaces: rectangle, square, trapezoid, polygon, or round. No curvilinear or combination curve and straight. No T-Mold.

METAL GROMMETS

FOR LAMINATE WORKSURFACES	
Oval/Square:	
Matte Silver	F

PLASTIC GROMMETS

FOR WORKSURFACES	
Black	E4
Brownstone	EY
Bungalow	EX
Carob	E8
Flint	E9
Fossil	EH
Loft	EV
Muslin	EU
Parchment	EN
White	EW

PLASTIC GROMMETS WITH WOODGRAIN EDGE

If woodgrain edge is specified, the plastic grommet color is predetermined, based on finish selection.

Beigewood, Fawn Cypress, N	latural Maple,
and Natural Recon	Muslin EU
Branded OakBı	ownstone EY
Phantom Charcoal	Flint E9
Phantom Ecru	Loft EV
Portico Teak	Fossil EH
Skyline Walnut	Flint E9
All other woodgrain options	Black E4

LOCKS

Matte Silver.....EL

Allsteel[®]

Note: Refer to individual product pages for upcharges.

Concensys®

Specification and Price List

Effective January 29, 2017

- Software support packages furnished to the customer, either by Allsteel® or by another source, which support the sale of Allsteel products are superseded by printed price lists.
- Prices are subject to change without notice. All orders are subject to prices in effect at the time of order.
- Please refer to your Allsteel Dealer Sales and Discount Policies for order placement information, terms and conditions.
- Additional copies of this Specification and Price List are available upon request from Allsteel Literature Fulfillment at 1-866-255-7833.

• Ordering information appears at the bottom of each product page complete with examples on how to specify. Fabric and finish pages are referenced at the bottom of product pages.

This publication is available as an interactive or downloadable PDF at www.allsteeloffice.com.

Questions or Comments?

Please call us at: 888-ALLSTEEL 888-255-7833

Finishes	Worksurface Supports
Table of Contents	Panel-mount Worksurface Supports and Brackets
New, Revised, and Discontinued Products	Cadence Desking Worksurface Supports and Brackets74
Allsteel Lifetime Warranty5	Cadence Desking Modesty Panels and Gussets
COM and Specials Policies6-8	Universal Modesty Panels and Metal Center Drawers76
Programs9-10	METAL OVERHEADS
Typicals Overview11	Working with Overheads, Shelves, and Hutches77-81
SPECIFICATIONS	Overhead Cabinets, Shelves, and Tackboards82-83
Introduction and Overview12-13	Hutches and Tackboards84
Working with Panels and Connectors14-20	STORAGE
PANELS AND CONNECTORS	Introduction and Overview85-86
Tackable Acoustical Panels	Working with Essentials™ Storage
Stacking and Glazed Panel Frames	Essentials Metal Pedestals95-97
Doors — Hinged Door Panel and Sliding Doors23	Essentials Metal Personal Files and Towers98-99
Connectors, End Covers, and Wall Mount Kits24-26	Essentials Metal Lateral Files
Tackboards	Essentials Metal Combination Files101
ELECTRICAL (8-WIRE)	Essentials Metal Cabinets and Bookcases
Working with Electrical & Data28-33	Laminate Tops for Essentials102
Power Harnesses, Pass-Thru Cables, and Jumper Cables34	Cubby Laminate Storage
Duplex Receptacles, In-feeds, Power/Data Dome	EXTENSIONS™
Power Poles and Electrical & Data Components36-37	Introduction
WORKSURFACES & SUPPORTS	Working with Organization Tools106-108
Working with Worksurfaces and Supports38-46	Tool Rails109
Working with Cadence® Freestanding Desking47-55	Work Tools110
Laminate Flat Edge	Marker Boards, Center Drawers, and Technology Modules111
Primary, Wave, and Bow Front56-57	Working with Ergonomic Accessories112-115
Corner, 120°, 60°, Corner Shelf, and Corner Cove58-59	Keyboard Supports, CPU Hammocks, and Corner Sleeve116
Altitude® Height-Adjustable59	Monitor Arms and Tablet Arms117
Peninsula, P-Shaped, Jetty, and Boomerang60	Working with Illumination118-119
Reef, Quarter-Round, and D-Shaped61	Illumination
Countertops62	APPENDIX AND INDEX
9120 Program for Non-Standard Sizes64-65	Locking Specification/Easy Lock
Laminate T-Mold Edge	16" x 20" Fabric Samples and Touch-Up Paint
Primary, Wave, and Bow Front66-67	Replacement Parts Order Form126
Corner, Corner Shelf, 120°, 60°, and Corner Cove68-69	Index — Model Numbers with Page Reference127-129
Peninsula, P-Shaped, Quarter-Round, and D-Shaped70-71	Panel FabricsInside Back Cover
Countertops	

Concensys	New, Revised, and Discontinued Froduct
NEW PRODUCTS	DISCONTINUED PRODUCTS
Storage	Concensys
Essentials™ 18"D Pedestals — 7/6/2016	Concensys 120° Connectors 7/3/2016
Extensions™	Storage
Power/Data Modules with USB ports — clamp on and	Essentials 26% "H Pedestals — 4/1/2016
under worksurface — 11/7/2016	Extensions™
NEW FINISHES	Footrest — 1/2017
Laminates — Branded Oak LBO1, Ebony Recon LER1,	Touch-Up Paint
Fawn Cypress LFC1, Mangalore Mango LMM1,	Accent Colors — all colors — 10/6/2016
Phantom Charcoal LPC1 — 1/29/2017	
Laminates — Lowell Ash LLA1, Natural Recon LNR1, Phantom Ecru LPE1, Portico Teak LPT1, Skyline Walnut LSW1 —	DISCONTINUED FABRICS
7/3/2016	Tasanee — all colorways 12/15/2017
Edges — Branded Oak BO, Ebony Recon DR, Fawn Cypress FC,	Celestial — all colorways 12/31/2016 Imprint, Jet Set, and Stagger — all colorways 7/3/2016
Mangalore Mango MM, Phantom Charcoal PC $$ — 1/29/2017	implime, jet see, and stagget — an colorways 7/3/2010
Edges — Lowell Ash DL, Natural Recon NR, Phantom Ecru PE,	
Plyband PL, Portico Teak DP, Skyline Walnut SW — 7/3/2016 Panel Fabrics — Refuge Eclipse RFG990 and Glacier RFG991 —	
1/1/2017	
Panel Fabrics — Appoint Panel Frost APN934, Reflections Galvanized	
REF929 and Ice REF920, Sarto Fog SRT914, Tempest Slate TP945	
and Zebra TP935, Coast Channel COA914, Pebble COA912,	
and Pier COA913, Spin Panel with 14 colorways, Terrain with 9	
colorways, and Script with 13 colorways. (All are listed on inside back cover) — $7/3/2016$	
back cover) 7/3/2010	
	· -
	-
	•
	-

Lifetime Warranty

Allsteel Inc. warrants its products to be free from defects in material and workmanship for as long as the original purchaser owns them, except as set forth below.

Allsteel shall repair or replace with comparable product (at Allsteel's discretion), free of charge, any Allsteel product or component manufactured after January 29, 2017, that fails under normal commercial office use.

This warranty is subject to the following provisions:

Some natural variations occurring in wood, leather, or other natural materials are inherent to their character and not considered defects. Allsteel does not warrant the colorfastness or matching of colors, grains, or textures of these materials. Additionally, a Customer's Own Material (COM) selected by, and used at the request of, a user is not warranted.

The materials and components listed below are covered according to the following schedule from the date of sale:

- Wood products and electrical components (lamps and ballasts are not covered), seating controls, pneumatic cylinders, glides, casters and polymer-based components, and foam — 12 years
- Wood seating, stacking chairs, Sum®
 AutoFit® technology, and laminates —
 10 years
- User-adjustable worksurface mechanisms, tablet arm mechanisms, interior woodframed seating and lounge products, occasional tables, Mimeo™ mesh, Quip™ mesh, Scout® mesh, panel and seating upholstery fabrics, and other covering materials — 5 years
- Marker board surfaces and upholstery on Gather™ products — 3 years
- #19®, Access™, Acuity®, Clarity®, Inspire®, Lyric™, Relate®, Scout, Seek®, Sum, and Trooper® asynchronous and synchro-tilt models are warranted for multiple shifts and users up to 300 lbs. Mimeo is warranted for multiple shifts and users up to 350 lbs. Lyric Large & Tall is warranted for multiple shifts and users up to 400 lbs. Trooper Large & Tall is warranted for multiple shifts and users up to 500 lbs. All other Allsteel chairs and components are warranted for single-shift, 40-hour workweek usage.

- #19 chair, including components and material, is warranted for as long as the original purchaser owns the chair.
- #19, Access, Acuity, Clarity, Lyric, Relate, and Seek mesh/carriers and Mimeo and Quip carriers are considered structural chair components and as such are warranted for as long as the original purchaser owns the chair
- Undercabinet LED light fixture warranted for 3 years; power supply warranted for 1 year
- Link™ LED light 5 years
- Wand[™] LED Light fixture warranted for 5 years; power supply warranted for 3 years
- Beyond™ Movable Walls 10 years; moving parts such as door hardware and door mechanisms — 5 years; customer's own hardware — supplier warranty

This warranty does not apply to:

- Normal wear and tear over the course of ownership, including fabric puddling
- Damage from sharp objects (e.g., writing utensils, heeled shoes, scissors, jewelry, keys)
- Modifications or attachments to the product not approved by Allsteel
- Products not installed, used, or maintained in accordance with product instructions and warnings
- Products used for rental purposes
- Damage caused by the carrier in-transit, which is handled under separate terms
- Third-party products. Allsteel, to the extent possible, will pass through to the original purchaser (and process claims under) any warranty provided by manufacturers of undercabinet lighting, ergonomic work tools, or other third-party products supplied by Allsteel.

TO THE EXTENT ALLOWED BY LAW, ALLSTEEL MAKES NO OTHER WARRANTY, EITHER EXPRESS OR IMPLIED, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. ALLSTEEL WILL NOT BE LIABLE FOR ANY CONSEQUENTIAL OR INCIDENTAL DAMAGES.

This warranty applies only to products sold within the United States of America and the Commonwealth of Canada.

Your Allsteel Dealer is our mutual partner in supporting your warranty requests. To obtain service under this warranty, please contact your Allsteel Dealer.

Concensys – 1/2017 allsteeloffice.com | 5

Concensys[®] COM Policy

COM Program

Allsteel understands that customers may at times want to specify fabrics outside of Allsteel's standard fabric offering. Our COM program was designed to make specifying COMs on Allsteel products a simpler, friendlier, and hassle-free process. This process is simple and easy to use, and is described below under "Allsteel to Supply." If a Dealer wishes to manage the COM process themselves, they can do so by following guidelines under "Dealer to Supply". Find out more about Allsteel's COM process by emailing our COM Department at ASICSCOM@allsteeloffice.com.

Allsteel to Supply:

- 1. Select the fabric you wish to use and check the COM Search on Synergy. You need the COM supplier's name, fabric pattern name, and color name to search for approved fabrics.
- 2. If your fabric is listed as an approved fabric, you may place your order directly with Allsteel Customer Support. Please use the fabric code (e.g., S216426XP) from the COM Test Request on your order in the place of the standard fabric code. Make sure to mark on the top of the order "Allsteel to Supply." If your fabric is not listed as approved, you will need to select the "Request COM Test" link on the COM Search website. Allsteel will arrange to obtain test fabric and you will be notified of the results within 3 to 5 working days of receipt of the test yardage by Allsteel.
- If the fabric is approved, you will receive an email summary from Allsteel with the correct price grade and fabric code for order purposes. Written COM price quotes hold pricing for 90 days after issue date.
- 4. Once the fabric has been approved by Allsteel, enter your order directly with Allsteel Customer Support. Allsteel will purchase all COM fabric directly from the COM suppliers and schedule for production.
 - In the event that the Dealer decides to cancel a COM fabric order, the Dealer is responsible for the cost of the fabric plus a handling charge that is equal to 10% of the fabric cost.

Dealer to Supply:

 Select the fabric you wish to use and check the COM Search on Synergy or call Allsteel Customer Support to see if the fabric you have chosen has already been tested and approved on the product you are interested in.

You need to have the COM supplier's name, fabric pattern name, and color name for this inquiry.

2. If your fabric is listed as approved, and it is not a Partnership fabric, you may request a "Dealer to Supply" code and estimate the yardage required by using the yardage requirements listed in the price list by model. For questions please contact Allsteel Customer Support.

3. If your fabric is not listed as already tested and approved, you will need to complete a COM Test Request on Synergy. You will need to arrange for the test fabric to be sent to:

HNI Fabric Testing Attn: COM Dept. 2210 2nd Avenue Muscatine, IA 52761

Allsteel requires 3 yards of fabric and 2 memo samples for each panel system fabric being tested; and 4 - 8" x 8" memo samples for all seating testing. You will be notified of the test results within 3 to 5 working days of receipt of the test yardage by Allsteel.

- 4. Make sure to use a "Dealer to Supply" COM code (e.g., S216426ZP) and place your order directly with Allsteel Customer Support.
- 5. All "Dealer to Supply" orders will be charged Grade 4 pricing for seating, Grade 3 for Gather, and Grade D pricing for panels. Dealers will pay for the COM fabric separately.
- 6. All "Dealer to Supply" fabric must be sent on a fabric roll.
- 7. Place your fabric order directly with the COM Supplier with instructions for the fabric to be sent on a fabric roll to:

HNI Fabric Distribution Center — Dealer PO Number **COM Production Yardage**

Docks 20-22 200 Oak Street Muscatine, IA 52761

Information that MUST be included in the packing slip attached to the fabric:

- 1. Dealer's Purchase Order number to Allsteel
- 2. Allsteel's Tracking number for the COM fabric
- 3. Dealer Name
- 4. Yards of Fabric

If the fabric shipment does not match the correct fabric and yardage, Allsteel will notify the Dealer for resolution.

If Allsteel receives fabric with incorrect labeling that cannot be linked to an Allsteel furniture order, Allsteel will hold the fabric for up to 7 days, while the COM Expeditor attempts to identify the order. After 7 days, Allsteel will return the fabric to sender. There are no exceptions to this policy.

Any cancelled orders are subject to cancellation charges up to the full value of the Allsteel product cancelled. Allsteel will determine the actual cancellation charge at the time the cancellation is requested.

8. For additional details on "Dealer to Supply" fabric refer to your Allsteel terms and conditions.

6 | Allsteel Concensys – 1/2017

COM Policy

Concensys®

Additional Policy Information:

The company assumes no responsibility for the overall appearance, flammability, normal durability, colorfastness, or any other quality standards. The Company reserves the right to reject a COM if the quality of the COM is not satisfactory for the product. Should this occur, the customer will be notified with an explanation within 7 working days of receipt of test materials.

The company is not responsible for fabric that has become obsolete at the COM supplier, that is of poor quality, or that is delivered late to the manufacturer from the COM supplier. Excess yardage will be disposed of at Allsteel's discretion.


All cancellations or changes to COM orders are subject to Company approval. Because of the nature of COM, special fabrics, finishes, and structural modifications, products ordered as specials and then cancelled prior to shipment are subject to cancellation costs up to the full value of the product cancelled. The company determines the actual cancellation charge at the time the cancellation is requested. Upon approval, a cancellation number is issued to the Customer.

Purchase orders will not be accepted or entered unless the testing process is complete with positive results.

If all testing has been previously completed, re-testing is only necessary if fabric is to be used on a different product, or pattern direction has changed from that previously approved.

Previous test results can be obtained by a customer on the COM Search on Synergy or by calling Allsteel Customer Support. COM testing will require 3-5 working days from receipt of test yardage.

COM testing will require 3-5 working days from receipt of test yardage.



All COM fabric will be applied to seating and panel systems Pattern Cut unless Railroad Cut is requested and approved on the COM Test Request. Any fabrics approved as a width pass, the dealer is responsible for clarifying Railroad Cut on orders containing items that are too large to support the Pattern Cut of a fabric application (any items larger than 48" high or wide).

Fire Retardant

The Dealer is responsible for ensuring that the COM fabric is certified to meet all flame retardant requirements.

For more information, please contact Allsteel Customer Support.

YARDAGE REQUIREMENTS FOR FABRIC WITH REPEATS — FOR USE ON GATHER™ PRODUCTS

Fabric Width	Plain Fabric	2"- 14" Repeat	15"- 19" Repeat	20"- 27" Repeat	28"– 36" Repeat
54"	0	+15%	+20%	+25%	+30%
53"	+6%	+19%	+24%	+28%	+36%
52"	+13%	+23%	+28%	+33%	+38%
51"	+19%	+26%	+31%	+36%	+41%
50"	+25%	+30%	+35%	+40%	+45%
49"	+30%	+35%	+40%	+45%	+50%
48"	+35%	+40%	+45%	+50%	+55%
47"	+45%	+50%	+55%	+58%	+65%

Depending upon the pattern repeat, it may be necessary to pattern cut the fabric. This will require 10% additional fabric.

To calculate multiple repeats (vertical and horizontal), add each repeat for total yardage required. For example for a fabric width of 54": 7" vertical requires 15%, 15" horizontal requires 20% total additional yardage required equals 35% (15% + 20%). Therefore, if your chair requires 2 yards of fabric, multiply 2 by 35%. Then 2.7 yards will be yardage required.

Concensys – 1/2017 allsteeloffice.com | 7

Concensys®

Special Paint & Stain Policy

Allsteel at its own discretion may modify its standard products with non-standard paint and stain colors to meet specific needs. Dealer is required to submit a special paint or stain request via the COM Search on Synergy. A sample of the non-standard paint or stain color desired will be required for matching. Pricing, lead time, and order information will be provided at the time of approval.

- For each new requested stain or paint, there will be a \$500 net fee to cover supplier costs to match the special item.
- For existing, previously-approved stains or paints, there is no \$500 matching fee, however, there is a sample chip fee of \$175 net for stains and \$100 net for paints.
- Samples, preferably at least 3" x 5" chips, of the exact color desired should be sent to the Allsteel Tailored Products
 Group. Paint matches require (3) sample chips and stain matches require (3) sample chips. Please mail these sample chips to the address below and reference the Special Item
 Request Number from Tailored Solutions.

Allsteel Inc.

Attn: Tailored Products Group 2210 Second Avenue Muscatine, IA 52761

- Allsteel will color match the sample and send control samples
 to the address provided in the request. Dealer will review
 Allsteel's color match and approve by signing the back of
 the sample chip. Send the signed sample back to the Allsteel
 Tailored Products Group.
- Special paints will be assigned a paint price grade.
- Orders will not be accepted until Allsteel receives the Dealer's written approval on the color match.
- Extended lead times will apply on orders containing special paints or stains.
- Due to manufacturing techniques, materials, and quality issues, some exclusions will apply and some matches may be declined.

Important Notes

Natural veneer is subject to nature's quality control.
 Differences in grain and color are naturally occurring
 variations and cannot be controlled by the manufacturer and
 cannot be considered as product defects. Natural veneer has
 the characteristics and beauty of a living organism; with its
 own variations of grain, growth, and color patterns. For these
 reasons, Natural veneer is preferred by many for its warmth
 and personal characteristics.

• Color changes will occur over time when wood is exposed to light. For this reason, when new product is ordered as an addition to existing product, there will be color variances between the old and new product. Please remember when specifying new product that although the species of veneer will be the same, additional product is being manufactured from a different tree. It may take several months for the new furniture to mature to the color level of existing product. Even with this maturation process the additional product will not be an exact match.

Special Paint, Stain & Laminate Policy

Special Laminate Policy

The Company at its own discretion may modify its standard products with non-standard laminates to meet specific needs. Contact the Allsteel Tailored Products Group for pre-approved Wilson Art laminates and pricing for special laminates. When requesting a special laminate please supply manufacturer, along with name and pattern number of laminate.

- Extended lead times will apply on orders containing special laminates.
- Due to manufacturing techniques, materials, and quality issues, some product exclusions will apply and some requests may be declined.

8 | Allsteel Concensys – 1/2017

Concensys – 1/2017 allsteeloffice.com | 9

Everyday Advantage®

Program Terms for Everyday Advantage

- 1. Orders must clearly state "Everyday Advantage Order" and include the appropriate Everyday Advantage contract number:
 - Everyday Concensys® Std-0131, Everyday Concensys Canada-0133
 - Everyday Optimize™/Terrace® Std-0125, Everyday Optimize/Terrace Canada-0127
 - Everyday Concensys Gov-0132
- 2. Orders must contain only Everyday Advantage products. Choose the correct contract in your electronic ordering system by selecting the panel system, (Concensys or Optimize/Terrace) then add other desired products. If no systems product is being ordered, either contract can be selected.
- 3. Everyday Advantage orders are not eligible for bid pricing.
- 4. The complete Concensys, Optimize, and Terrace systems lines. This program also includes Access™, Inspire®, Lyric™, Mimeo™, Nimble®, Relate®, Seek®, Scout®, Tolleson, and Trooper® seating. Altitude®, Aware®, and Merge® tables are available, along with Align Lockers and the complete Essentials™ storage line. In addition, Extensions™ ergonomic accessories and lighting are part of the offering.
- 5. Orders received for the program must only contain Everyday Advantage identified product. Products included in an order that are not part of the program will cause the whole order to be acknowledged as regularly manufactured products.
- 6. All textiles and finishes are available, but some may have extended lead times.
- 7. Everyday Advantage orders are not limited to a minimum or maximum.
- 8. All orders ship based on standard lead times. Large-quantity orders of like products may be subject to longer lead times.
- 9. Standard freight terms apply.
- 10. If driver assistance is needed, standard driver assist charges will be added at time of order entry.

Allsteel Inc. reserves the right to amend or terminate this program at any time with 30 days written notice. Allsteel is not liable for service delays caused by force majeure (circumstances beyond Allsteel's control).

10 | Allsteel Concensys – 1/2017

Electrical & Data

Concensys® — Working with Electrical

Concensys Electrical Applications

- Concensys panels are UL 1286 Listed.
- Electrical components are UL Listed and CSA Certified.
- It is the customer's responsibility to ensure that use of the pre-wired electrical system, the number of receptacles used on a given circuit, and connection to a building power source, be in compliance with all local and national electrical codes.
- A licensed electrician must make connections to a building electrical supply.
- To power all panels at a "T" connection, at least one power harness must be used; at a "X", at least two power harnesses must be used.
- Harnesses will stretch up to 3½", to span an extended straight panel connection.
- When multiple 18"W panels are connected at a "T" or "X" connection, an additional 18"W pass-thru cable is required.

- GSA Reference Page
- Use power harnesses in all panels adjacent to 18"W panels.
- Pedestals and lateral files, positioned under worksurfaces, may render some receptacles inaccessible, and may prohibit use of grommets.
- Four-circuit components and three-circuit components (with suffix "A") cannot be used together.


Definitions of components:

Electrical Power Harness



- Used to distribute power in panels 24"W and wider.
- Can be mounted in the base pathway.
- Power distribution in either direction.
- Specify power harness to match panel width.
- Double-sided: receptacles can be inserted into both sides of power blocks.
- Use power harnesses in all panels configured adjacent to 18"W panels (if panel run is to be electrified).


Electrical Pass-Thru Cables



Pass-Thru Cable Without Duplex Capacity:

- For use in 18"W panels or when no receptacle is required. Specify to panel width.
- Cable length cannot be stretched.
- Allows power distribution through panels where receptacles cannot be positioned.
- When multiple 18"W panels are connected at a "T" or "X" connection, an additional 18"W pass-thru cable is required.

Electrical Pass-Thru Harnesses



Pass-Thru Harness With Duplex Capacity:

- For use in 24"W and wider panels.
- Use in panels where multiple receptacles are not required.
- Use when specifying both data and electrical at beltline height.
- Added feature: has capacity for one receptacle on each side of a panel. Feature offers future expansion and is an alternative to power harnesses.

Electrical Jumper Cables

 Jumper cable plugs into power block end of electrical power harness or electrical pass-thru harness.

All electrical power harnesses and pass-thru harnesses will stretch $3\frac{1}{2}$ " to span intersections and connections. Jumpers span from beltline to baseline, around corners, and back to beltline.

Duplex Receptacles

- 15-amp outlet configuration.
- Models A871601 and A871601A have a 20-amp outlet configuration required by some large copiers.






- Fit back-to-back into the power block(s) of power and pass-thru harnesses.
- Labeled with the provided circuit. Circuits connected to the Isolated Ground are identified with an orange triangle; circuits that do not share a neutral or ground have an orange circuit number.

Power In-Feed Base/Ceiling Models A879072, A879072A, A879168, and A879168A

• Used to connect the panel electrical system to the building electrical supply Model A879168 or A879168A is used to connect to the building electrical supply, in a ceiling plenum area. Power pole A870070 must be ordered separately.



- A licensed electrician must make connections to a building electrical supply.
- Plugs into any receptacle position; can be rotated left or right.
- Conduit is UL Listed, black, liquid-tight conduit (outside diameter is

Power In-Feed Model A871972 and A871972A

- Used to connect the panel electrical system to the building electrical supply.
- A licensed electrician must make connections to a building electrical supply.
- Plugs into the end of a power block. The end-of-panel base pathway cover can be field cut to provide an access port.
- Model uses UL recognized flex-cable conduit no portion can be left exposed after installation.

Power In-Feed Models A871912, A871912A, A871918, and A871918A


- Used to connect the panel electrical system to the building electrical supply, in a ceiling plenum area.
 Power pole A870071 must be ordered separately.
- A licensed electrician must make connections to a building electrical supply.
- Plugs into the end of a power block.
- Models use UL recognized extra-flex conduit.

Note: In-feed cables listed above may be field-cut to desired length. Remove UL Listing/Schematic label and reposition onto the usable length.




Illustration is representative of all A8719XX models


In-Feeds



Model A870070 Power/Communication Pole 4.5 sq. in.




Model A870071 Integrated Power/ Communication Pole 3.3 sq. in.

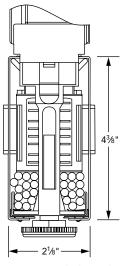

25 CAT 6 with electrical (60% fill ratio)

Knockout dimensions: 2.700"W x 1.377"H

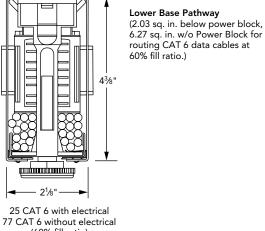

Base pathway covers with additional knockouts are available for improved utilization of power and data.

Electrical & Data

Concensys® — Specification Information

GSA Reference Page

Electrical

Electrical Components — Concensys (pages 28-29)

• Four-circuit components and three-circuit components (with suffix "A") cannot be used together.

Electrical Power Harness (page 34)

- Harness will stretch up to $3\frac{1}{2}$ " to span a "T" or "X" connection, by stretching.
- Has an extra terminal connection that pass-thru cables do not have (increases connection capacity — required at some "T"/"X" junctions).
- Use power harness in all panels configured adjacent to 18"W panels (if panel run is to be electrified).
- To power all panels at a "T" connection, at least one power harness must be used; at a "X", at least two power harnesses must be used. An additional power harness is required when using an integrated power pole.

Electrical Pass-Thru Harness (page 34)

- Used to distribute power in panels 24"W and wider.
- Receptacles can be inserted into both sides of power block(s).
- Harnesses will stretch up to 3½" to span "T" and "X" connections.

Jumper Cables (page 34)

• Electrical jumper cable plugs into power block end of electrical power harness or electrical pass-thru harness.

Electrical Pass-Thru Cable (page 34)

• Used to distribute power in panels where receptacles are not required.

Dual Electrical Eight-circuit Power Harness Kit (page 34)

- Kit provides back-to-back four-circuit systems giving double the capacity of harness and pass-thru cables.
- Requires two four-circuit in-feeds.
- Uses four-circuit receptacles.
- Four-circuit components and three-circuit components (with suffix "A") cannot be used together.
- Models must be positioned "back-to-back" in the panel single-side use is not permitted
- Components can only be routed in a single run a single run cannot branch to multiple panel runs at "T" and "X" junctions.
- Four-circuit jumper cables (A8713xx) can only be connected to a power block at one end of a run power cannot be routed between a run in the base pathway area and a run in the beltline area, except at one end of the run.
- Standard four-circuit pass-thru cables (A8710xx) can be used in between power harnesses. Two are required in the back-to-back configurations.
- Models can be connected to standard four-circuit power harnesses and pass-thrus, although it is not recommended because of possible circuit number ambiguity

- Two power infeeds are required to connect the back-to-back runs. Power infeed A8719xx must be connected to a power block at the end of a run.
- Data faceplates and terminals cannot be positioned in a panel into which back-to-back power harnesses are installed.

Duplex Receptacles (page 35)

- Receptacles are marked with circuit number.
- A871601 and A871601A have a 20 amp plug configuration.

Power In-feed Cables (page 35)

- A879072 and A879168 can be plugged into any power block.
- Conduit length: base in-feed is 6' long, integrated ceiling in-feed is 12' or 18' long and ceiling in-feed is 14' long.
- Ceiling in-feed (A879168) can be used with power pole model A870070.
- Integrated ceiling In-feed cable connects to a prewired electrical harness in the panel base pathway, transverses through the panel connector, and terminates in the junction box at the top of the integrated power pole.

Hardwire Applications (page 35)

- Used when local electrical codes require hardwire entry.
- A871400 or A871400A mounts into panel 30-60"W. When used in 30"W or 36"W panels, power can be routed in only one direction. When used in wider panels, a pass-thru cable for that panel width can be used to route power back in the opposite direction.

Pull-up Receptacle (page 35)

- 6' cord w/plug; circuit breaker; mounts in worksurface grommets.
- May interfere with the placement of optional pedestals.
- Included grommet may not match Allsteel worksurface grommets.

Power/Data Dome (page 35)

- Fits into existing grommet hole to provide two surface mounted receptacles and two data ports.
- May interfere with the placement of optional pedestals.
- Can be mounted into field-cut, 21/4" diameter hole.
- 6' black power cord.
- 2 simplex receptacles and 2 data positions.
- Includes adapters to allow use of commercially available data terminals or blanks to fill unused openings.
- Many of the AMP, AT&T, Krone, Leviton, and other commercially available data terminals can be used terminals must be of a design that will snap into .695 x .650, .590 x .790, or .590 x .750 openings, in .064 max. thick faceplates.

(continued on next page)

Electrical (continued)

Power/Communication Pole (page 36)

- Double cavity used to route in-feed cable 879168 from ceiling to panel base pathway.
- · Conduit of the in-feed cable serves as the division of electrical and communications cabling.

Integrated Power/Communication Pole (page 36)

- Installs into 43-82" high or 13"H stacking 90°, "T", and "X" connections.
- In addition to ordering the power pole, an appropriate trim/ connector kit must be ordered.
- To power the prewired electrical system, from a ceiling power source, a ceiling in-feed cable, model A871912, A871912A, A871918, or A871918A, must be purchased separately.
- Single cavity with removable cover.
- Field-cut to desired length.
- Outside dimension = 2" square.
- For applications requiring integrated power poles longer than 78", an extension kit is available. Contact Allsteel Customer Support for information.
- Not to be used with 120° or 135° connectors.

Trim/Connector Kits (page 36)

- Kit consists of:
 - Panel Top Transition Piece
 - 4" x 4" Junction Box and Cover
 - Drop-Ceiling Trim Plates
 - Panel End Brackets
 - Hardware Pack
- A wood option is not available: use a Flint colored model 87007XP.
- Can function at variable height junctures.

Concensys Connector Bracket Kit (page 36)

- Used to increase vertical cable capacity through the panel connectors
- Increases vertical wire capacity on a single "T" or "X" connector.

Data Port Kit (page 36)

- Allows field installation of additional data ports to Concensys technology panels.
- Knockout dimension: 2.700"W x 1.377"H.

Wireway Grommet (page 36)

- Fits into any receptacle opening.
- Used when routing wires through receptacle opening.

Wire Management Channel (page 36)

- Self-adhesive backing to attach to panels and underside of worksurfaces.
- Contains two cavities for routing wires.
- Note: Each cavity provides space for a maximum of six .25" Dia. cables. Total capacity = 1 sq. in.

Cable Management Tray (page 36)

- Attaches under the worksurface to contain cables. Hardware
- Metal tray shelf is 4" deep. Can hold most electrical power strips and/or surge protectors.

Cord Retainer Clip (page 36)

- Provides confinement of vertical electrical/data wiring.
- 1½"H cord clips snap into vertical panel slots to contain
- 4 clips are provided standard with each tasklight cord.
- Package of 50. Black only.

Cord Organizer (page 36)

- Attached to bottom of worksurface.
- 4"W x $\frac{7}{8}$ "D, made from sheet metal.
- Top sits flush with worksurface if mounted to worksurface.
- 4 cable cut outs: 2 .250" diameter and 2 0.147" diameter; .250" diameter cut outs are centered between the .147" diameter cut outs.

Base Pathway Covers (page 37)

• Features an additional knockout for improved utilization of power and data. Knockouts are 2.700 "W x 1.377"H.

Data Faceplates (page 37)

- Fit into receptacle and data port openings in panel base pathway covers, or into data port (CDP).
- Due to panel depth, back-to-back data modules should not be used at beltline or in the base.


Specialized electrical may be available through Allsteel Tailored Products Group.

Electrical & Data

For specification information see pages 28-33.

GSA SIN 711-1

 ${\sf Concensys}^{\tt @} - {\sf Electrical\ Components}$



Description	Cap. per Panel Side	3 + 1 2 + 2	Separate Neutrals		List Price
Electrical Power Har	nesses				
for 24"W panels	1	A871224	A871224A	5	\$ 221
for 30"W Panels	2	A871230	A871230A	5	\$ 221
for 36"W Panels	2	A871236*	A871236A	5	\$ 221
for 42"W Panels	2	A871242*	A871242A	5	\$ 235
for 48"W Panels	2	A871248*	A871248A	5	\$ 235
for 60"W Panels	2	A871260*	A871260A	S	\$ 235



2	A871248*	A871248A	5	\$	235
2	A871260*	A871260A	5	\$	235
esses with P	ower Block				
1	A871124	A871124A	5	\$	137
1	A871130	A871130A	5	\$	137
1	A871136*	A871136A	5	\$	137
1	A871142*	A871142A	5	\$	144
1	A871148*	A871148A	5	\$	144
1	A871160*	A871160AC	5	\$	144
1	A871172	A871172A	5	\$	193
1	A871196	A871196A	5	\$	226
1	A8711120	A8711120A	5	\$	262
1	A8711144	A8711144A	5	\$	299
	2	2 A871260* esses with Power Block 1 A871124 1 A871130 1 A871136* 1 A871142* 1 A871148* 1 A871160* 1 A871172 1 A871172 1 A871196 1 A8711120	2 A871260* A871260A esses with Power Block 1 A871124 A871124A 1 A871130 A871130A 1 A871136* A871136A 1 A871142* A871142A 1 A871142* A871142A 1 A871148* A871148A 1 A871160* A871160AC 1 A871172 A871172A 1 A871196 A871196A 1 A8711120 A8711120A	2 A871260* A871260A S esses with Power Block 1 A871124 A871124A S 1 A871130 A871130A S 1 A871136* A871136A S 1 A871142* A871142A S 1 A871142* A871142A S 1 A871148* A871148A S 1 A871160* A871160AC S 1 A871172 A871172A S 1 A871170 A8711120A S	2 A871260* A871260A \$ esses with Power Block 1 A871124 A871124A \$ 1 A871130 A871130A \$ 1 A871136* A871136A \$ 1 A871142* A871142A \$ 1 A871148* A871148A \$ 1 A871160* A871160AC \$ 1 A871172 A871172A \$ 1 A871196 A871196A \$ 1 A8711120 A8711120A \$

^{*}Electrical harnesses are intended for use with Allsteel systems furniture and are approved under GSA SIN 711-1. When purchased separately and used without Allsteel systems furniture, those electrical harnesses marked by (*) are considered Open Market.



${\color{red}\textbf{Electrical Jumper Cables} -- Harness\ to\ Harness}$

Max.

39" Jumper Cable – up to					
29" vertical jump		A871336	A871336A	5	\$ 114
78" Jumper Cable – 78" in					
length for use with technolog	y				
panel at 90° connections		A871378	A871378A	5	\$ 194
Electrical Pass-Thru Cables	without Po	wer Block			
for 18"W Panels	0	A871018	A871018A	5	\$ 124
for 24"W Panels	0	A871024	A871024A	5	\$ 124
for 30"W Panels	0	A871030	A871030A	5	\$ 124
for 36"W Panels	0	A871036	A871036A	5	\$ 124
for 42"W Panels	0	A871042	A871042A	5	\$ 130
for 48"W Panels	0	A871048	A871048A	5	\$ 130
for 60"W Panels	0	A871060	A871060A	5	\$ 130
for 72"W Panel Runs	0	A871072	A871072A	5	\$ 180
for 96"W Panel Runs	0	A871096	A871096A	5	\$ 216
for 120"W Panel Runs	0	A8710120	A8710120A	5	\$ 251
for 144"W Panel Runs	0	A8710144	A8710144A	S	\$ 282



Description	Max. Recept. Cap. per Panel Side	Eight-circuit 3 + 1 (each side) 2 + 2 (each side)	Freight Class	List Price
Dual Electrical Eight-	circuit Power Harn	ess Kits		
For 24"W Panels	1	A2-8CIR24 S	100	\$ 529
For 30"W Panels	2	A2-8CIR30 5	100	\$ 529
For 36"W Panels	2	A2-8CIR36 S	100	\$ 764
For 42 "W Panels	2	A2-8CIR42 5	100	\$ 764
For 48"W Panels	2	A2-8CIR48 S	100	\$ 764
For 60"W Panels	2	A2-8CIR60 S	100	\$ 771


Note: Kit consists of two four-circuit harnesses placed "back-to-back" to provide 8 circuits.



Concensys® — Overview of Worksurfaces

GSA SIN 711-1

Add Suffix "N" to model number for no grommets, no upcharge.

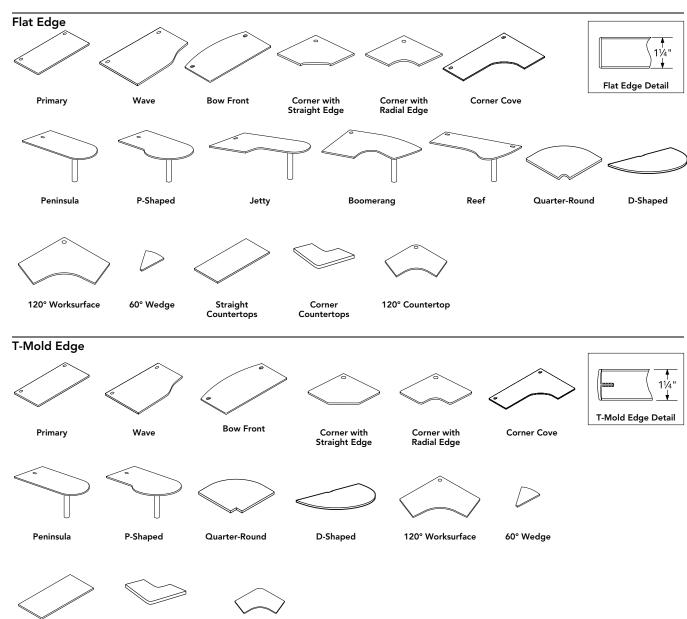

120° Countertop

Straight Countertop Corner Countertop

Concensys® — Specification Information

GSA Reference Page

Flat and T-Mold Edge Worksurfaces

Worksurfaces (pages 56-72)

• Worksurfaces can be specified without grommets by adding suffix "N" to model number for no grommet, no upcharge.

Primary Worksurfaces (pages 56 and 66)

- 24", 30", and 36"W worksurfaces have one grommet, centered; two on widths 42"W and greater.
- Width must correspond with panel width(s). For worksurface to span a "T" or extended straight connection add "T" suffix and upcharge. (All T-span worksurfaces are available in Express Solutions™ except 72 "W models.)
- Center support bracket included on 54"W-60"W. Other support hardware is ordered separately.
- Worksurfaces greater than 60"W require a cantilever bracket for center support in panel mounted applications. Specify 18" cantilever on 20"D and 24" cantilever on 24"D and 30"D worksurfaces.
- Primary worksurfaces can be used with a modesty panel and appropriate supports to configure freestanding desk(s). Refer to Working with Cadence®, pages 47-53.

Wave Worksurfaces (pages 57 and 67)

- Wave worksurfaces may be used to transition from a 30"D worksurface to a 24"D worksurface. When used with a 24"D corner between two connecting 24"D wave edges, it provides a "cockpit" setting.
- 30" and 36"W worksurfaces have one grommet, centered. Wider worksurfaces have two grommets.
- Width must correspond with panel width(s).
- Center support bracket included on 54"W-60"W. Other support hardware is ordered separately.
- Worksurfaces 66" and over require a cantilever bracket for center support in panel mounted applications. Specify 18" cantilever on 20"D and 24" cantilever on 24"D and 30"D worksurfaces.
- Dimension "S" listed on pages 57 and 67 is the straight leading edge dimension available for storage.

Bow-Front Worksurfaces (pages 57 and 67)

- Standard with two wire management grommets.
- Wave and bow-front worksurfaces can be used with a modesty panel and supports to configure freestanding desk(s). Refer to Working with Cadence, pages 47-53.

Corner Worksurfaces (pages 58 and 68)

- Panel-hung application requires two panels of corresponding width joined at 90°.
- Leading edge dimensions:

0 0	
Flat Edge —	
$833624M = 16\frac{5}{8}$ "	834230M = 16%
834224M = 25%"	834830M = 25%
834824M = 33\%"	
T-Mold Edge —	
833624A = 16 ⁷ / ₈ "	834230A = 16 ⁷ / ₈ "
834224A = 25%"	$834830A = 25\frac{1}{4}$ "
834824A = 33\%"	

- Rear corner support bracket included (left-handed).
 Worksurface bracket kit (order separately) required at junction where a panel is wall-mounted to a permanent wall and wall track stanchion is not positioned in the right hand corner.
- Leading edge of radial leading edge units has an inside radius of 10%".
- With woodgrain laminate, grain direction is diagonal to grain of adjacent worksurface(s).
- Corner worksurfaces can be used with a modesty panel and appropriate supports to configure freestanding desk(s). Refer to Working with Cadence, pages 47-53.
- One wire management grommet in corner standard.

120° Corner Worksurfaces (pages 58 and 68)

- Standard with one wire management grommet in corner location.
- Order brackets separately.
- Rear support bracket included (left-handed). Worksurface bracket kit (order separately) required at junction where a panel is wall-mounted to a permanent wall and wall track stanchion is not positioned in the right hand corner.

60° Pie Worksurfaces (pages 58 and 68)

- No grommet.
- Order support column and two flat brackets separately.

Corner Shelves (pages 58 and 68)

- Diagonal leading edge = 10½"
- Diagonal depth = $22\frac{1}{2}$ "
- Includes panel attachment brackets.
- Laminate with flat or T-mold edge.

Corner Cove Worksurfaces (pages 59 and 69)

- Worksurfaces greater than 60"W require a cantilever bracket for center support in panel mounted applications.
 Specify 18" cantilever on 24"D, and 24" cantilever on 30"D worksurfaces.
- Standard with two wire management grommets.
- Corner cove worksurfaces can be used with a modesty panel and appropriate supports to configure freestanding desk(s). Refer to Working with Cadence, pages 47-53.
- Rear corner support bracket included (left-handed).
 Worksurface bracket kit (order separately) required at junction where a panel is wall-mounted to a permanent wall and wall track stanchion is not positioned in the right-hand corner.

Altitude® Height-Adjustable (page 59)

• For freestanding applications, see height-adjustable tables in the Seating, Collaboration, and Tables Price List.

(continued on next page)

Flat and T-Mold Edge Worksurfaces (continued)

Peninsula, P-Shaped, and Jetty Worksurfaces (pages 60 and 70)

- Standard with one wire management grommet.
- Support column ordered separately, column includes panel support brackets 831099.
- Peninsula worksurface must correspond to the width of its support panel.
- Peninsula and P-shaped worksurfaces can also be attached perpendicularly to a primary worksurface using flat brackets. Do not attach to a worksurface supported with cantilever brackets.
- Worksurfaces can be used with a modesty panel and appropriate supports to configure freestanding desk(s). Refer to Working with Cadence, pages 47-53.

Boomerang Worksurfaces (page 60)

- Standard with one wire management grommet.
- Support column ordered separately, column includes panel support brackets 831099.
- Boomerang worksurfaces can be used with a modesty panel and appropriate supports to configure freestanding desk(s). Refer to Working with Cadence, pages 47-53.
- Available in flat edge only.

Reef Worksurfaces (page 61)

- Standard with two wire management grommets.
- Support column ordered separately, column includes panel support brackets 831099.
- Reef worksurfaces can be used with a modesty panel and appropriate supports to configure freestanding desk(s). Refer to Working with Cadence, pages 47-53.
- Available in flat edge only.

Quarter-Round Worksurfaces (pages 61 and 71)

- Connects two 90° panel-attached worksurfaces.
- Order support column and two flat brackets separately.

D-Shaped Worksurfaces (pages 61 and 71)

- Order support column and two 11"D end panels separately.
- Not recommended for use with cantilever brackets CCB24L or CCB24R for shared applications.
- Worksurface includes attachment brackets.
- Use only with other worksurfaces with matching edge.

Countertop Brackets (pages 62 and 72)

- Countertop brackets must be ordered separately. Model 851500 contains one right-hand and one left-hand bracket.
- Specify paint color.
- Order two model 851500 for straight countertops. Order three model 851500 for corner countertops.

Countertops (pages 62 and 72)

- Countertops cannot be used with 32"H panels.
- Corner countertops require two panels of corresponding width joined in an "L".

120° Corner Countertops (pages 62 and 72)

- Countertops cannot be used with 32"H panels.
- Countertops require two panels of corresponding width joined in a 120° angle.
- Low profile only.
- Brackets must be ordered separately.
- Order three model 851500 for corner countertops.

Non-Standard Worksurface Sizes (pages 64-65)

- The 9120 Program can be used to order particle board rectangular worksurfaces in any non-standard width and depth in 1/8" increments up to a maximum of 120 "W x 36"D.
- Other modification requests should be made through Allsteel Tailored Products Group.

Concensys® — Specification Information

GSA Reference Page

Supports

End-Panel Support (page 73)

- Non-handed for use at either end of worksurface.
- Levelers provide 1½" vertical adjustment.
- Must be connected into panel slots for panel-hung applications.
- Can be converted to freestanding with removal of panel-mount bracket.
- Straight worksurfaces adjacent to 120° and 135° connections must be supported by full end panels.
- 11"D models for use with D-shaped worksurfaces or curvilinear shaped worksurfaces in freestanding applications.

Support Leg (page 73)

- Non-handed for use at either end of worksurface. Leg portion is 12¾"D.
- Use in a shared position or at 90° panel junctions to support adjoining worksurfaces or to support a worksurface adjacent to a dual-surface worksurface.
- Flat bracket included.
- Levelers provide 1½" vertical adjustment.
- Must be connected into panel slots for panel-hung applications.
- Can be converted to freestanding with removal of panel-mount bracket.

Support Column (page 74)

- Used to support one end of curvilinear worksurfaces. (Includes panel support brackets.)
- Levelers provide 1½" vertical adjustment.

Permanent-Wall Hanger Kit (page 74)

- Mounts to permanent dry-wall to hang panel-hung components.
- Wall track has 1/8" x 1/2" slots on 1" centers.
- Customer to furnish connecting hardware. (Refer to Concensys Installation Instructions for appropriate hardware.)
- Worksurfaces should not be supported with cantilever brackets when using permanent-wall hanger kit.
- An integral channel is provided for vertically routing task light cords.
- Includes a cover for top of channel.

Cantilever Brackets (page 73)

- Use with runs less than 96". Floor support is required for runs 96" and longer.
- Where applicable, cantilevers are recommended over an external worksurface support channel. Worksurface runs over 60"W require an external worksurface support channel when a cantilever cannot be used.
- Do not use at the end of a worksurface where no 90° return panel is positioned.
- Includes tie bracket and attachment hardware.
- Avoid installation on only one side of a straight connection except to support corner worksurfaces.

- DO NOT use to support worksurfaces from which a hanging pedestal is suspended, or to which a peninsula worksurface is attached.
- DO NOT use cantilever brackets to support worksurfaces supported with permanent-wall hanger kit.
- Do not use with wall track or to support a worksurface to which a return worksurface is attached.

Cantilever Bracket — Handed (page 73)

- Cantilever brackets are handed (left or right) and can be inserted into panel reveals in 1" vertical increments. No assembly required.
- Left- and right-hand brackets required in shared applications.
- 24"D cantilevers are required to be used for both 24"D or 30"D worksurfaces.
- 18"D cantilevers are required to be used for 20"D worksurfaces or center support for 24"D.
- 12"D cantilevers are required to be used for 12"D worksurfaces.

Cantilever Bracket — Non-Handed (page 73)

- Cantilever brackets are non-handed and can be inserted into panel reveals in 1" vertical increments. Assembly required.
- One bracket in shared applications includes two angled brackets.
- Bracket accommodates 24"D or 30"D worksurfaces.

Worksurface-to-Panel Bracket (page 73)

- Model 831324 mounts to a 24"W panel to support a 24"D worksurface.
- Model 831330 mounts to a 30"W panel to support a 24"D or 30"D worksurface.

Worksurface Bracket Kit (page 73)

• Used to connect the end of a worksurface to a panel of the same width.

Flat Brackets (page 73)

• Flat Brackets can be used to connect one worksurface perpendicularly to another worksurface.

Pedestal-to-Panel Attachment Bracket (page 73)

- Can be used in place of full end panel or return panel.
- Provides structural support to panel run by securing panel directly to pedestal.
- Is compatible with Align™ and Essentials™ pedestals.


External Worksurface Support Channel (pages 56 and 66)

- Is required on a systems worksurface for additional support for spans greater than 60"W. Width of worksurface span can be reduced by using support storage.
- Extends 1½" below the worksurface.
- When using 28"H mobile pedestals the length of support channel needs to be reduced to accommodate width of the pedestal.
- Support channel may interfere with mounting of some CPU holders and keyboard supports.

Cadence[®] Freestanding

Concensys® — Working with Cadence **GSA Reference Page**

Cadence offers unlimited versatility. Its modular flexibility creates office solutions of all shapes, sizes, and styles.

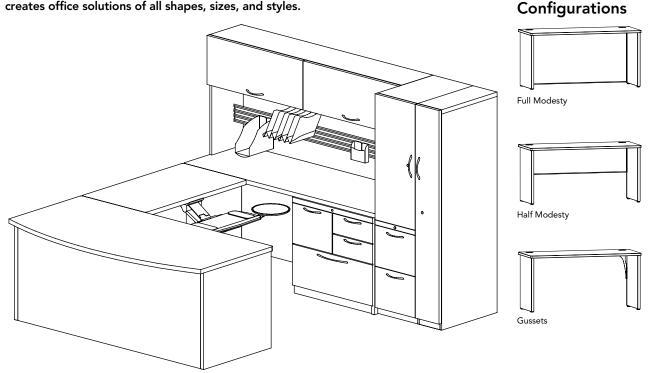

All the right choices

Choose Cadence freestanding desking with confidence. It personalizes any work environment, accommodates a range of needs, and offers all the right features — curvilinear worksurface shapes, multiple worksurface edges, and a complete paint finish and laminate offering. Cadence is made to last with heavy-gauge steel construction. Metal-to-metal worksurface connection points make installation and reconfiguration reliable and easy. And Cadence is backed by a lifetime warranty.

Universally flexible

Cadence sets up easily and reconfigures time after time. It even shares components with Optimize[™], Terrace[®], and Concensys, which simplifies inventory management. Cadence is created with worksurfaces, supports, modesty panels, end panels, and brackets. Cadence is compatible with the entire line of Allsteel storage solutions and Extensions — work tools to provide personalized organization for every workstyle.

Systems integration — Cadence works in combination with Optimize, Terrace, or Concensys panels, extending the functionality of both product lines.

Highly adaptable — Make the most of building architecture by using an existing wall to create a semi-private workspace.

Space utilization — Multiple worksurface shapes offer unlimited design potential for using space creatively and efficiently.

Team interaction — Cadence design flexibility allows you to create personal workspace and a team collaboration area in the same office.

The Cadence Choice

It works in the open plan, the private office, or in combination with Optimize, Terrace, or Concensys panels, allowing complete office coordination. The flexible, universal design of Cadence supports virtually any workstyle and any interior aesthetic. Backed by Allsteel's Lifetime Warranty and manufactured to strict environmental standards, Cadence provides one high-value package.

allsteeloffice.com | 47 Concensys - 1/2017


Concensys® — Working with Cadence

GSA Reference Page

Configurations

End Panels (3) and Support Legs (1)

Each are available in two options: freestanding or panel-mount. The only difference between the two options are the panel-mount models come with a left- or right-handed bracket to attach the support to a panel in a Cadence systems application. If the freestanding version is purchased and later needs to be converted to panel-mount, the proper handed panel-mount bracket may be purchased separately.




The 11"D end panel is used to freestand peninsulas, curvilinear shapes, and D-tops in panel applications.

Corner Desk Legs @

Corner desk legs have a 90-degree bend and welded construction. The strong construction, allows gussets or half-height modesty panels to be used with corner legs.

Bridge Kits **3**

Bridge kits include: two flat brackets, two modesty panel-toend panel attachment brackets, and two tie straps. This kit is used when attaching a bridge unit between two rectangular worksurfaces.

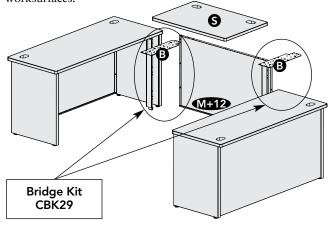


There are some bridge instances where only half of a bridge kit is needed (e.g., using a bridge between a rectangular worksurface and a corner or peninsula). A return kit may be ordered for these instances.

Surface 6

Support Column 39

Return Kits (3)


Return kits include: one flat bracket, one modesty panel-to-end panel attachment bracket, and one tie strap. These are used when attaching a return to a primary desk. Return kits can also be used in some bridge applications — one example is shown below when using a peninsula.

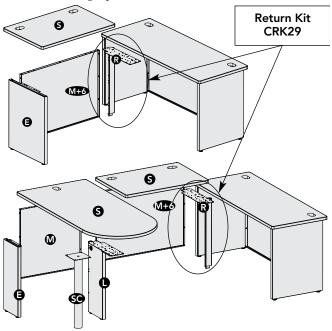

Desk-to-Panel Attachment Kits ①

Desk-to-panel attachment kits are used to connect a worksurface and modesty panel perpendicular to a panel of corresponding width. Opposing end of worksurface must be attached with an end-panel, support leg, or corner leg mounted directly under this worksurface.

When using a corner or corner cove worksurface with the rear corner attached to a panel, and opposing end of worksurface is attached to a freestanding desk — use corner w/desk attachment kit. "Hand" of unit is determined from the user's side of the desk (right hand unit attaches to right side of modesty).

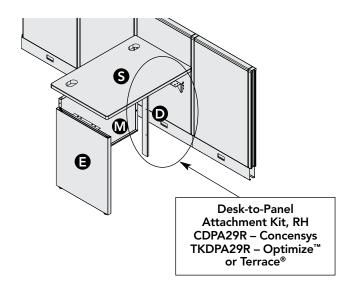


Concensys® — Working with Cadence

GSA Reference Page

Corner w/Desk Panel Attachment Kit W

Corner w/desk panel attachment kit connects the rear corner of a corner or corner cove worksurface and modesty panel to a panel when the opposing end of the worksurface shares a support leg with an adjacent freestanding desk and the support leg is mounted under the freestanding desk. "Hand" of unit is determined from the user's side of the desk (left hand unit attaches to left side of modesty).

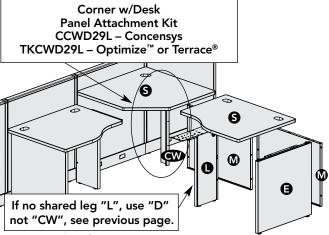


Corner Worksurfaces

Corner worksurfaces to accommodate 90-degree corner desk legs.

In-Line Connections of Desks

Freestanding full end panels must be used to support adjacent rectangular desks, corner desks, and corner desks with returns. Freestanding support legs should NOT be used at the in-line junction. 24"D full end panels may be used at the in-line junction on 30"D rectangular desks if two worksurface tie straps are used to secure the desks together. Contact Allsteel Customer Support for ordering information.

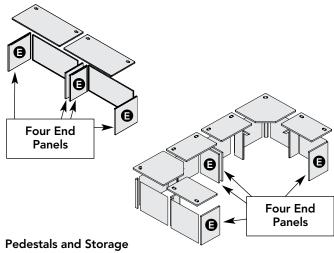

Pedestals must be ordered one size smaller than the depth of the worksurface. For example, 20"D peds should be used with 24"D worksurfaces. 20"D or 23"D pedestals can be used with 30"D worksurfaces. Using 18"D laterals or personal files provide additional pull style and storage options under 24"D worksurfaces.


Modesty Panels (1)

The following are some general guidelines for Cadence modesty panels:

- **Desk:** Modesty panel width is the same width as the worksurface
- **Return:** Modesty panel width is 6" greater than the width of the worksurface
- Bridge connecting two rectangular worksurfaces: Modesty panel width is 12" greater than the width of the bridge worksurface
- Bridge connecting a rectangular worksurface and corner or peninsula: Modesty panel width is 6" greater than the width of the worksurface
- Corner connecting to an adjacent worksurface: Modesty panel width is the same width as the worksurface.


Stand-Alone Corner Modesty Panels

Stand-alone corner modesty panels are used only when one or both sides of a corner or corner cove worksurface are freestanding and NOT attached to another worksurface. Specify the width the same as the width of the worksurface.

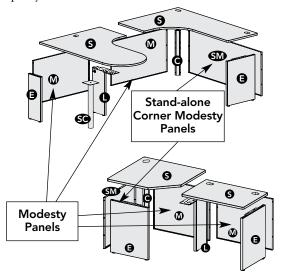

Gussets @


Gussets can be used in place of a modesty panel with desks 36"W to 60"W. Gussets can also be used with corner desk legs.

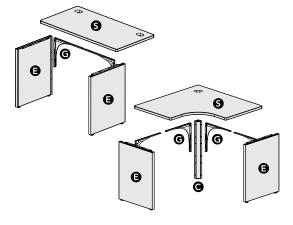


Concensys® — Working with Cadence **GSA Reference Page Configurations**

Freestanding Desk

Exam	ple Shown	
Qty.	Model	Descripton
1	832436A	T-Mold Edge Worksurface 24"D x 36"W
2	CEP2429F	End-Panel Support 24"D x 29½"H
1	CS369	Modesty Panel 36"W x 291/2"H




Panel-Attached Desk

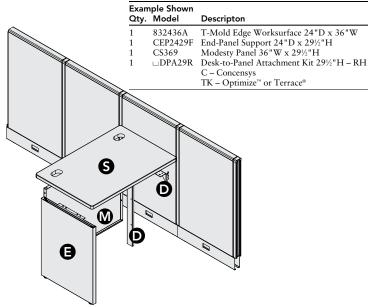

	Ψ							
CONFIGURATION	Work-	End-Panel	Desk		Modesty Pane	el .	Desk-	Corner
OPTIONS	surface (S)	Support (E)	Support Leg (L)	Same width as Work- surface (M)	6" wider than Work- surface (M+6)	12" wider than Work- surface (M+12)	to-Panel Attachment Kit (D)	Desk Leg (C)
Freestanding Desk	1	2		1				•
Panel-Attached Desk	1	1		1			1 RH	

Return Desk (Attached to a primary or return desk.)

Return Desk (Attached to a panel-hung worksurface.)

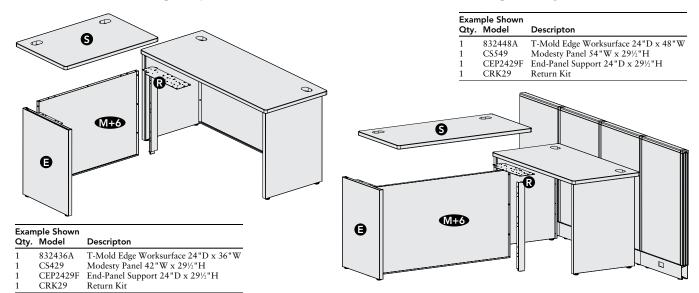


Note: The widest modesty panel is 72"W which limits return worksurfaces to a maximum of 66"W.

CONFIGURATION OPTIONS	Work- surface (S)	End-Panel Support (E)	Desk Support Leg (L)	Same width as Work- surface (M)	Modesty Pane 6" wider than Work- surface (M+6)	12" wider than Work- surface (M+12)	Desk- to-Panel Attachment Kit (D)	Corner Desk Leg (C)	Return Kit (R)
Return Desk	1	1			1				1

Concensys® — Working with Cadence **GSA Reference Page**


Configurations

Bridge Desk (Attached between two primary desks.)

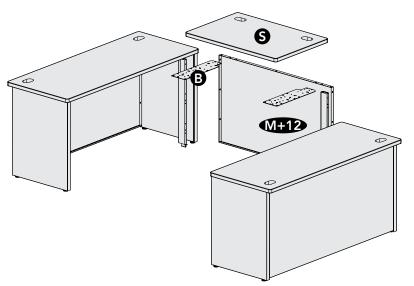

Exam	ple Shown	
Qty.	Model	Descripton
1	832442A	T-Mold Edge Worksurface 24"D x 42"W
1	CS549	Modesty Panel 54"W x 29½"H
1	CBK29	Bridge Kit


CONFIGURATION	Work- surface (S)	End-Panel Support (E)	Desk Support Leg (L)	Same width as Work- surface (M)	Modesty Pane 6" wider than Work- surface (M+6)	el 12" wider than Work- surface (M+12)	Desk- to-Panel Attachment Kit (D)	Corner Desk Leg (C)	Bridge Kit (B)
Bridge Desk	1					1			1

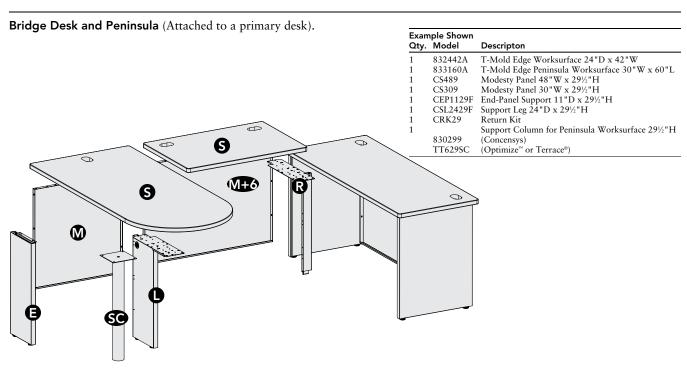

CONFIGURATION OPTION	Work- surface (S)	End-Panel Support (E)	Desk Support Leg (L)	Same width as Work- surface (M)	Modesty Pane 6" wider than Work- surface (M+6)	el 12" wider than Work- surface (M+12)	Desk- to-Panel Attachment Kit (D)	Support Column (SC)	Return Kit (R)
Bridge Desk and Peninsula	2	1	1	1	1			1	1

Configurations

Corner Desk (Stand-alone)

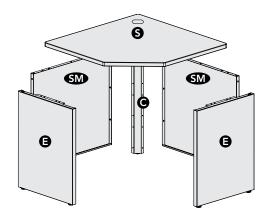


Exam	ple Shown	
Qty.	Model	Descripton
1	833624A	T-Mold Edge Worksurface 24"D x 36"W
2	CSCMP3629	Stand-Alone Corner Modesty Panel
		36"W x 29½"H
2	CEP2429F	End-Panel Support 24"D x 29½"H
1	CDL29	Corner Desk Leg 29½"H

${\sf Concensys}^{\tt @} - {\sf Working \ with \ Cadence}$

GSA Reference Page


Corner Desk (With an adjacent desk attached at one side.)

	ple Shown Model	Descripton
1	833624A	T-Mold Edge Corner Worksurface 24"D x 36"W
1	832436A	T-Mold Edge Worksurface 24"D x 36"W
1	CSCMP3629	Stand-Alone Corner Modesty Panel 36"W x 29½"H
2	CS369	Modesty Panel 36"W x 291/2"H
2	CEP2429F	End-Panel Support 24"D x 29½"H
1	CSL2429F	Support Leg 24"D x 29½"H
1	CDL29	Corner Desk Leg 29½"H
0		

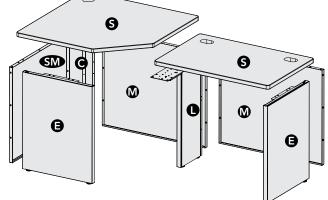

CONFIGURATION OPTION	Work- surface (S)	End-Panel Support (E)	Desk Support Leg (L)	Same width as Work- surface (M)	ty Panel 6" wider than Work- surface (M+6)	Stand-Alone Corner Modesty Panel Same width as Work- surface (SM)	Desk- to-Panel Attachment Kit (D)	Corner Desk Leg (C)
Corner Desk	1	2				2		1
Corner Desk (with adjacent desk)	2	2	1	2		1		1

Bridge Desk (Attached between corner and primary desk.)

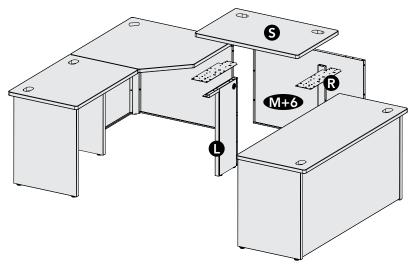

	nple Shown	
Qty.	Model	Descripton
1	832436A	T-Mold Edge Worksurface 24"D x 36"W
1	CS429	Modesty Panel 42"W x 29½"H
1	CRK29	Return Kit
1	CSL2429F	Support Leg 24"D x 29½"H

CONFIGURATION	Work- surface (S)	End-Panel Support (E)	Desk Support Leg (L)	Same width as Work- surface (M)	Modesty Pane 6" wider than Work- surface (M+6)	12" wider than Work- surface (M+12)	Desk- to-Panel Attachment Kit (D)	Corner Desk Leg (C)	Return Kit (R)
Bridge Desk	1		1		1				1

allsteeloffice.com | 53


Cadence® Freestanding

Concensys® — Working with Cadence


GSA Reference Page

Configurations

Corner Desk (Attached to a panel with an adjacent desk at one side.)

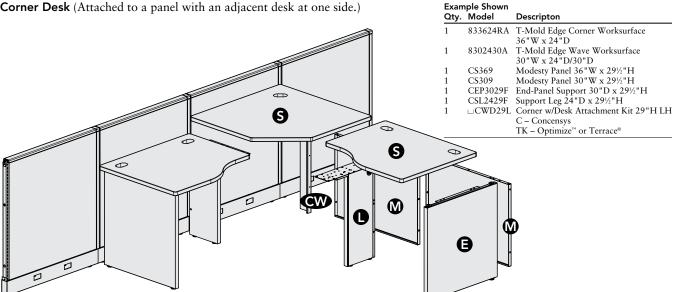

CONFIGURATION	Work-	End-Panel	Desk		Modesty Panel			Corner	Corner
	surface (S)	Support (E)	Support Leg (L)	Same width as Work- surface (M)	6" wider than Work- surface (M+6)	12" wider than Work- surface (M+12)	to-Panel Attachment Kit (D)	Desk Leg (C)	w/Desk Panel Attachment Kit (CW)
Corner Desk	2	1	1	2					1 LH

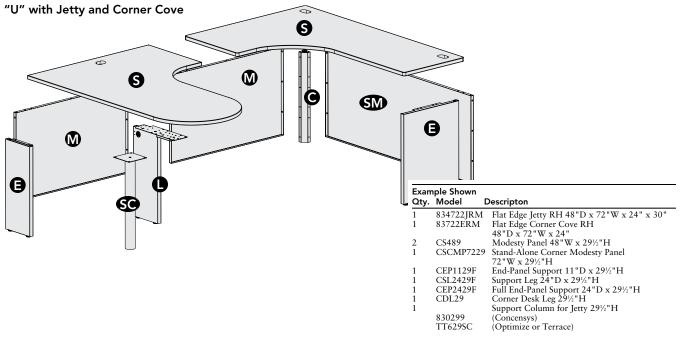

CONFIGURATION OPTION	Work- surface (S)	End-Panel Support (E)	Desk Support Leg (L)	Modes: Same width as Work- surface (M)	ty Panel 6" wider than Work- surface (M+6)	Stand-Alone Corner Modesty Panel Same width as Work- surface (SM)	Support Column (SC)	Corner Desk Leg (C)
Cove and Jetty	2	2	1	2		1	1	1

Concensys - 1/2017

Concensys® — Specification Information

GSA Reference Page

Cadence Supports

End-Panel Support (page 74)

- End panels are non-handed.
- Freestanding end panel is the same as the Concensys panel-mount end panel except removable panel-mount bracketry not included.
- End panels include attaching hardware and leveling glides.
- Leveling glides provide 2½" of adjustment.
- End panels are universal, shipped with a left and right-hand attachment bracket.
- End panels cannot be used for in-line junctions and are only used at the end of a panel run.

Support Leg (page 74)

- Support legs are non-handed.
- Freestanding support leg is the same as the Concensys panel-mount support leg except removable panel-mount bracketry not included. Leg portion is 12¾"D.
- Supports junctions of two worksurfaces.
- Includes a flat bracket.
- Concensys in-line support legs are used to support 24"D worksurfaces only in a shared position.

Panel-mount Bracketry (page 74)

- Includes hardware to convert freestanding end panels and support legs to panel-mount.
- Non-handed.

Support Column (page 74)

- Used to support one end of curvilinear worksurfaces.
- Includes panel support brackets.

Permanent-Wall Hanger Kit (page 74)

- Mounts to permanent dry-wall to hang panel-hung components.
- Wall track has 1/8" x 1/2" slots on 1" centers.
- Customer to furnish connecting hardware. (Refer to Concensys Installation Instructions for appropriate hardware.)
- Worksurfaces should not be supported with cantilever brackets when using permanent-wall hanger kit.
- An integral channel is provided for vertically routing task light cords.
- Includes a cover for top of channel.

Corner Desk Leg (page 74)

- Attaches two modesty panels at rear of corner desk.
- Leveler provides 1½" vertical adjustment.

Bridge Kit (page 74)

- Connects bridge worksurface and modesty panel to end panels and worksurfaces that are perpendicular to the bridge worksurface.
- Includes two flat brackets and two modesty panel-to-end-panel brackets.

Return Kit (page 74)

- Connects return worksurface and modesty panel to end panel and perpendicular worksurface — non-handed.
- Includes one flat bracket and one modesty panel-to-end-panel bracket.

Desk-To-Panel Attachment Kit (page 74)

- Used to connect a worksurface and modesty panel
 perpendicularly to a Concensys panel of corresponding width.
 Opposing end of worksurface must be attached with an
 end-panel, support leg or corner leg mounted directly under
 this worksurface.
- If using corner or corner cove with the rear corner attached to a panel, and opposing end of worksurface is attached to a freestanding desk — use corner w/desk panel attachment kit
- "Hand" of unit is determined from the user's side of the desk (left hand unit attaches to left side of modesty).

Corner w/Desk Panel Attachment Kit (page 74)

- Used when the rear corner of a corner or corner cove worksurface and modesty panel is attached to a Concensys panel and opposing end of worksurface is attached to a freestanding desk. Opposing end of worksurface shares the support leg that is mounted under the adjacent freestanding desk.
- "Hand" of unit is determined from the user's side of the desk.

Flat Brackets (page 74)

• Flat brackets can be used to connect one worksurface perpendicularly to another worksurface.

(continued on next page)

GSA Reference Page

Cadence Supports and Modesty Panels (continued)

Modesty Panel (page 75)

- Mounts to end-panel supports, desk support legs, bridge kit, return kit, desk-to-panel and corner w/desk panel attachment kits.
- 29½"H units provide ¾" of space between bottom of modesty panel and floor.
- Actual width of 29½"H modesty panel is 3¾" less than the nominal dimension listed in the Systems Price List.
- 14"H units provide 141/4" of space between bottom of modesty panel and floor.
- Use 14"H modesty panels for desks positioned against a wall to provide access to electrical receptacles.
- 14"H modesty panels, stand-alone corner modesty panels or gussets can now be used with corner or corner cove worksurfaces.
- Refer to pages 47-53 to select proper width.

Stand-alone Corner Modesty Panel (page 75)

- Use only when freestanding one or both sides of a corner or corner cove worksurface.
- Specify width the same as width of worksurface.
- See examples on page 52 on how to specify.
- 29½"H units provide ¾" of spacing between bottom of panel and floor.
- 14"H units provide 141/4" of space between bottom of modesty panel and floor.
- Actual width of modesty panel is 6¾6" less than the nominal dimension listed below.
- Modesty panels are inset 27/8"; when adding pedestals, consult the chart below.

Gussets (page 75)

- Can be used in place of a modesty panel with desks 36"W to 60"W.
- Provides easy access to wall outlets.
- Can be used with corner desks.
- Cannot be used with suspended pedestals.
- Modesty panels are inset 21/8"; when adding pedestals, consult the chart below.
- Gussets can be used on corner and corner cove worksurfaces.

Universal Modesty Panel (page 76)

- Mounts under peninsula, p-shape, jetty, and boomerang worksurfaces.
- Can be used with panel-mounted and freestanding worksurfaces.
- Provides 8½" of privacy and is non-handed.
- Constructed of steel. No upcharge for Select paint.
- Only requires attachment to the worksurface.
- Does not provide electrical, data or structural support.
- Panel is 1½" thick and can be mounted at various distances from edge of worksurface based on user's preference for clearance and conferencing requirements.

Universal Modesty Panels for Concensys Worksurfaces									
	F	Peninsula P-Shape Jetty Bo							
Model	60"L	66"L	72"L	72"L	66"L	72"L	72"L		
PMP41	•								
PMP47		•		•	•				
PMP53			•			•	•		

Metal Center Drawers (page 76)

- All metal center drawers feature pencil trays with three compartments for storage.
- For locking specifications, see pages 122-124.
- Ball-bearing slide suspension.


	Cadence Fre	estanding	Systems Panel-hung Worksurfaces			
Pedestal Depth	24" Deep	30" Deep	24" Deep	30" Deep		
18"	Yes	Yes	Yes	Yes		
19%"	Yes*	Yes	Yes*	Yes		
233/8"		Yes	Yes*	Yes		
293/8"				Yes*		

^{*}Wire management grommet is blocked in these applications.

Note: Pedestal placement may affect access to receptacles in base pathway.


Concensys – 1/2017 allsteeloffice.com | 55

For specification information see pages 38-46. For non-standard worksurface sizes see pages 64-65. Concensys® — Primary — Flat Edge GSA SIN 711-1



			t Price	
Description	Model	L1	L2	L3
Primary Worksurfaces				
24"W x 24"D	832424M	\$ 249	\$ 262	\$ 276
30"W x 24"D	832430M	\$ 262	\$ 276	\$ 290
36"W x 24"D	832436M	\$ 295	\$ 310	\$ 326
42"W x 24"D	832442M	\$ 331	\$ 347	\$ 365
48"W x 24"D	832448M	\$ 358	\$ 377	\$ 394
54"W x 24"D	832454M	\$ 386	\$ 408	\$ 425
60"W x 24"D	832460M	\$ 439	\$ 463	\$ 482
66"W x 24"D	832466M	\$ 476	\$ 502	\$ 523
72"W x 24"D	832472M	\$ 497	\$ 524	\$ 545
24"W x 30"D	833024M	\$ 262	\$ 276	\$ 290
30"W x 30"D	833030M	\$ 315	\$ 331	\$ 348
36"W x 30"D	833036M	\$ 339	\$ 356	\$ 374
42"W x 30"D	833042M	\$ 366	\$ 385	\$ 403
48"W x 30"D	833048M	\$ 386	\$ 408	\$ 425
54"W x 30"D	833054M	\$ 431	\$ 455	\$ 474
60"W x 30"D	833060M	\$ 480	\$ 506	\$ 527
66"W x 30"D	833066M	\$ 517	\$ 545	\$ 568
72"W x 30"D	833072M	\$ 561	\$ 591	\$ 616
Note: Add Suffix "N" to model number for	no grommet, no upcharge.			
	- ~			
12"W x 12"D Sample Worksurface	831212M			\$ 210

FOR PRIMARY WORKSURFACES TO SPAN A "T" OR EXTENDED STRAIGHT CONNECTION,	Suffix	Upcharge
ADD SUFFIX AND UPCHARGE.	Т	\$32



Description	Model	List Price
External Worksurface Support Channel (no color option) — 1½"H		
30"W External Support Channel for use on 42"W Worksurface	Z5SC42 S	\$ 50
36"W External Support Channel for use on 48"W Worksurface	Z5SC48 S	\$ 52
42"W External Support Channel for use on 54"W Worksurface	Z5SC54 S	\$ 59
48"W External Support Channel for use on 60"W Worksurface	Z5SC60	\$ 64
54"W External Support Channel for use on 66"W Worksurface	Z5SC66	\$ 73
60"W External Support Channel for use on 72"W Worksurface	Z5SC72	\$ 79
66"W External Support Channel for use on 78"W Worksurface	Z5SC78	\$ 86
72"W External Support Channel for use on 84"W Worksurface	Z5SC84	\$ 95

How to specify — Select the Concensys Model Number from above.	1st Option: Laminate: See inside front cover for finishes.	2nd Option: Edge Trim Color: See inside front cover for finishes.	3rd Option: Grommet Type (if applicable): P Plastic M Metal (add \$11 per grommet)	4th Option: Grommet Color (Metal only): EL Matte Silver Note: Plastic grommet color matches trim selection.
				E L

Examples: 833048M.LM14.EW.P 833048MTN.LM14.EW Z5SC42

Shippable by small-package carrier.

For specification information see pages 38-46.

GSA SIN 711-1





				List	Price	
Description	S	Model	L1	L	2	L3
Wave Worksurfaces						
30"W x 24"L x 30"R	11½"	8302430M	\$ 365	\$	384	\$ 402
36"W x 24"L x 30"R	13½"	8362430M	\$ 388	\$	410	\$ 427
42"W x 24"L x 30"R	15½"	8422430M	\$ 418	\$	441	\$ 460
48"W x 24"L x 30"R	15½"	8482430M	\$ 445	\$	470	\$ 489
54"W x 24"L x 30"R	21½"	8542430M	\$ 493	\$	520	\$ 541
60"W x 24"L x 30"R	27½"	8602430M	\$ 549	\$	578	\$ 603
66"W x 24"L x 30"R	33½"	8662430M	\$ 593	\$	624	\$ 652
72"W x 24"L x 30"R	39½"	8722430M	\$ 642	\$	675	\$ 705



30"W x 30"L x 24"R	11½"	8303024M	\$ 365	\$ 384	\$ 402	
36"W x 30"L x 24"R	13½"	8363024M	\$ 388	\$ 410	\$ 427	
42"W x 30"L x 24"R	15½"	8423024M	\$ 418	\$ 441	\$ 460	
48"W x 30"L x 24"R	15½"	8483024M	\$ 445	\$ 470	\$ 489	
54"W x 30"L x 24"R	21½"	8543024M	\$ 493	\$ 520	\$ 541	
60"W x 30"L x 24"R	27½"	8603024M	\$ 549	\$ 578	\$ 603	
66"W x 30"L x 24"R	33½"	8663024M	\$ 593	\$ 624	\$ 652	
72"W x 30"L x 24"R	39½"	8723024M	\$ 642	\$ 675	\$ 705	




Bow-Front Worksurfaces

60"W x 30"D1 x 36"D2	833660BTM	\$ 720	\$ 757	\$ 791
66"W x 30"D1 x 36"D2	833666BTM	\$ 780	\$ 819	\$ 856
72"W x 30"D1 x 36"D2	833672BTM	\$ 839	\$ 881	\$ 922



Note: Add Suffix "N" to model number for no grommet, no upcharge.



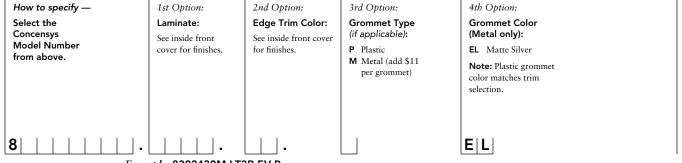

 ${\sf Concensys}^{\tt @} - {\sf Corner} - {\sf Flat} \ {\sf Edge}$

\$ 848


\$ 890

\$ 932

List Price

For specification information see pages 38-46.

GSA SIN 711-1



Description	Model	L1		L2	L3
Corner Worksurfaces w	vith Straight Leading Edge				
36"W x 24"D	833624M	\$ 4	81	\$ 518	\$ 552
42"W x 24"D	834224M	\$ 5	04	\$ 531	\$ 553
48"W x 24"D	834824M	\$ 5	64	\$ 594	\$ 619
42"W x 30"D	834230M	\$ 6	22	\$ 654	\$ 684
48"W x 30"D	834830M	\$ 6	30	\$ 663	\$ 692



36"W x 24"D	833624RM	\$ 499	\$ 526	\$ 548
42"W x 24"D	834224RM	\$ 531	\$ 559	\$ 584
48"W x 24"D	834824RM	\$ 604	\$ 636	\$ 664
42"W x 30"D	834230RM	\$ 641	\$ 674	\$ 704
48"W x 30"D	834830RM	\$ 691	\$ 726	\$ 759



48"W x 24"D


120° Corner Worksurfac	ce				
30"W x 24"D	833024BM	\$ 65	0 \$	683	\$ 714
36"W x 24"D	833624BM	\$ 72	0 \$	757	\$ 791
42"W x 24"D	834224BM	\$ 77	1 \$	810	\$ 847



60° Pie Worksurface				
24"D	802424SDM	\$ 406	\$ 429	\$ 447

Note: Add Suffix "N" to model number for no grommet, no upcharge.

834824BM



			Core P1 List Price			Core P1 List Price		Se	Select P2 List Price			
Description	Model		_1		L2	L3	L1		L2		L3	
Corner Shelves wit	th Flat Edge											
36" x 36" x 11"D	860536M	\$	414	\$	437	\$ 455	\$ 414	\$	437	\$	455	
42" x 42" x 11"D	860542M	\$	437	\$	461	\$ 480	\$ 437	\$	461	\$	480	
48" x 48" x 11"D	860548M	\$	466	\$	491	\$ 512	\$ 466	\$	491	\$	512	

How to specify — Select the Concensys Model Number from above.	1st Option: Laminate: See inside front cover for finishes.	2nd Option: Paint (Corner Shelves only):	2nd Option: Edge Trim Color: See inside front cover for finishes.	3rd Option: Grommet Type (Corner Worksurfaces only): P Plastic M Metal (add \$11 per grommet)	4th Option: Grommet Color (Metal only): EL Matte Silver Note: Plastic grommet color matches trim selection.	
8 .		P			E L	

Examples: 834230M.LT3B.EV.MEL 860536.LT3B.P27.E4

For specification information see pages 38-46.

GSA SIN 711-1

 ${\sf Concensys}^{\tt @} - {\sf Corner} \; {\sf Cove} - {\sf Flat} \; {\sf Edge}$

\$ 830

\$ 855 \$ 871

\$ 898 \$ 913

\$ 940




1 see pages 50-40.					05/1	J11 4	/ ! !
					Price		
Description	Model		L1		.2		L3
Corner Cove Worksurfaces -	 Extended Left 						
60" x 36" — 24"L / 24"R	83122ELM	\$	570	\$	600	\$	627
60" x 36" — 24"L / 30"R	83132ELM	\$	592	\$	623	\$	651
60" x 48" — 24"L / 24"R	83622ELM	\$	630	\$	663	\$	692
60" x 48" — 30"L/24"R	83623ELM	<u> </u>	657		691	\$	722
60" x 48" — 24"L / 30"R	83632ELM	<u> </u>	657		691	\$	722
60" x 48" — 30"L / 30"R	83633ELM	\$	681		716	\$	748
72" x 36" — 24"L / 24"R	83222ELM	\$	630		663		692
72" x 36" — 24"L / 30"R	83232ELM	\$	657	\$	691	\$	722
72" x 48" — 24"L / 24"R	83722ELM	\$	803	\$	843	\$	881
72" x 48" — 30"L / 24"R	83723ELM	\$	830	\$	871	\$	913
72" x 48" — 24"L / 30"R	83732ELM	\$	830	\$	871	\$	913
72" x 48" — 30"L / 30"R	83733ELM	\$	855	\$	898	\$	940
Corner Cove Worksurfaces -	— Extended Right						
36" x 60" — 24"L / 24"R	83122ERM	\$	570	\$	600	\$	627
36" x 60" — 30"L / 24"R	83132ERM	\$	592	\$	623	\$	651
40	02/225014		/20		′′′		/00
48" x 60" — 24"L / 24"R	83622ERM	\$	630		663	\$	692
48" x 60" — 24"L / 30"R 48" x 60" — 30"L / 24"R	83623ERM 83632ERM	\$ \$	657 657		691 691		722 722
		<u>*</u>		-			
48" x 60" — 30"L / 30"R	83633ERM	\$	681	\$	716	\$	748
36" x 72" — 24"L / 24"R	83222ERM	\$	630	\$	663	\$	692
36" x 72" — 30"L / 24"R	83232ERM	\$	657	\$	691	\$	722
48" x 72" — 24"L / 24"R	83722ERM	<u></u>	803	\$	843	\$	881
		\$		-			
48" x 72" — 24"L / 30"R	83723ERM	\$	830	>	871	<u> </u>	913

Note: Add Suffix "N" to model number for no grommet, no upcharge.

83732ERM

83733ERM

48" x 72" — 30"L / 24"R 48" x 72" — 30"L / 30"R

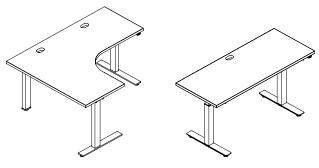

Note: Freestanding Altitude 2- and 3-stage electric height-adjustable tables are available to order in the Seating, Collaboration and Tables price list.

How to specify — Select the Concensys Model Number from above.	1st Option: Laminate: See inside front cover for finishes.	2nd Option: Edge Trim Color: See inside front cover for finishes.	3rd Option: Grommet Type: P Plastic M Metal (add \$11 per grommet)	4th Option: Grommet Color (Metal only): EL Matte Silver Note: Plastic grommet color matches trim selection.
8 3 .				E L

Example: 83722ERM.LT3B.EY.MEL

Concensys® — Peninsula / P-Shaped / Jetty / Boomerang — Flat Edge

For specification information see pages 38-46.


GSA SIN 711-1



			List Price				
Description	Model	L1		L2	L3		
Peninsula Worksurfaces							
60"L x 30"W	833160M	\$ 6!	8	\$ 692	\$ 723		
66"L x 30"W	833166M	\$ 72	7	\$ 764	\$ 799		
72"L x 30"W	833172M	\$ 79	4	\$ 834	\$ 872		
60"L x 36"W	833660M	\$ 79	4	\$ 834	\$ 872		
66"L x 36"W	833666M	\$ 88	0	\$ 924	\$ 967		
72"L x 36"W	833672M	\$ 90	9	\$ 1016	\$ 1065		



P-Shaped Worksurfaces w/42	" Diameter End			
72"L x 30"W (Left hand)	833272LM	\$ 909	\$ 954	\$ 999
72"L x 30"W (Right hand)	833272RM	\$ 909	\$ 954	\$ 999




Jetty Worksurfaces — Left Ha	nd			
48"A x 66"B x 24"C x 30"D	834662JLM	\$ 855	\$ 898	\$ 940
48"A x 66"B x 30"C x 30"D	834663JLM	\$ 872	\$ 915	\$ 958
48"A x 72"B x 24"C x 30"D	834722JLM	\$ 892	\$ 936	\$ 980
48"A x 72"B x 30"C x 30"D	834723JLM	\$ 908	\$ 953	\$ 998



Jetty Worksurfaces — Right Ha	ind			
48"A x 66"B x 24"C x 30"D	834662JRM	\$ 855	\$ 898	\$ 940
48"A x 66"B x 30"C x 30"D	834663JRM	\$ 872	\$ 915	\$ 958
48"A x 72"B x 24"C x 30"D	834722JRM	\$ 892	\$ 936	\$ 980
48"A x 72"B x 30"C x 30"D	834723JRM	\$ 908	\$ 953	\$ 998



Boomerang Worksurfaces	: — Left-Hand, 90°			
48"A x 72"B x 24"C	8372249LM	\$ 1047	\$ 1099	\$ 1150
49" A v 72" B v 20" C	92722001 M	¢ 1080	¢ 11/13	¢ 1107



Boomerang Worksurface	es — Left-Hand, 110°			
36"A x 72"B x 24"C	8372241LM	\$ 1047	\$ 1099	\$ 1150
36"A x 72"B x 30"C	8372301LM	\$ 1089	\$ 1143	\$ 1197




Boomerang Worksurfaces	— Right-Hand, 90°				
48"A x 72"B x 24"C	8372249RM	\$ 1047	\$ 1099	\$ 1150	
48"A x 72"B x 30"C	8372309RM	\$ 1089	\$ 1143	\$ 1197	



boomerang worksurface	s — Right-Hand, 110°			
36"A x 72"B x 24"C	8372241RM	\$ 1047	\$ 1099	\$ 1150
36"A x 72"B x 30"C	8372301RM	\$ 1089	\$ 1143	\$ 1197

Note: Add Suffix "N" to model number for no grommet, no upcharge.




How to specify — Select the Concensys Model Number from above.	1st Option: Laminate: See inside front cover for finishes.	2nd Option: Edge Trim Color: See inside front cover for finishes.	3rd Option: Grommet Type: P Plastic M Metal (add \$11 per grommet)	4th Option: Grommet Color (Metal only): EL Matte Silver Note: Plastic grommet color matches trim selection.
8 3 .				E L

Example: 834662JLM.LT3B.EV.P

Concensys® — Reef / Quarter-Round / D-Shaped — Flat Edge

For specification information see pages 38-46.

GSA SIN 711-1



Description	Model	_	L1	L2	L3
24"D Reef Worksurfaces — Le	ft-Hand (extends to 36"D)				
66"W	836624LM		\$ 662	\$ 696	\$ 727
72"W	837224LM		\$ 676	\$ 711	\$ 742
	·				

30"D Reef Worksurfaces — Left-Hand (extends to 42"D)

	,			
66"W	836630LM	\$ 676	\$ 711	\$ 742
72"W	837230LM	\$ 697	\$ 732	\$ 765



24"D Reef Worksurfaces — Right-Hand (extends to 36"D)								
66"W	836624RM	\$ 662	\$ 696	\$ 727				
72"W	837224RM	\$ 676	\$ 711	\$ 742				

30"D Reef Worksurfaces — Right-Hand (extends to 42"D)

66"W	836630RM	\$ 676	\$ 711	\$ 742
72 "W	837230RM	\$ 697	\$ 732	\$ 765

NOTE: Add Suffix "N" to model number for no grommet, no upcharge.



Support column and flat brackets ordered separately.

Quarter-Round Worksurfaces (outside corner connecting two 90° panel-attached worksurfaces)

24"W x 24"W	802424M	\$ 339	\$ 356	\$ 374
30"W x 30"W	803030M	\$ 427	\$ 451	\$ 469






D-Shaped Worksurfaces

Worksurface connects to two 24"D Worksurfaces	832407M	\$ 650	\$ 683	\$ 714
Worksurface connects to two 30"D Worksurfaces	833007M	\$ 757	\$ 795	\$ 831




Support column and 11" end panels ordered separately.


Note: Cantilever brackets should not be used in place of end panels in this application.



832407M



833007M

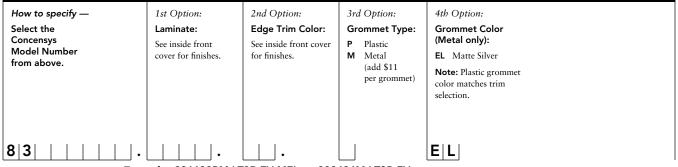

Examples: 836630RM.LT3B.EV.MEL 802424M.LT3B.EV

 ${\sf Concensys}^{\tt @} - {\sf Countertops} - {\sf Flat} \ {\sf Edge}$

\$ 904

\$ 949

\$ 993

For specification information see pages 38-46.

GSA SIN 711-1







				List	t Price	
Description	Model	L1			L2	L3
Straight Countertops	— must order brackets					
24"W x 15"D	851524M	\$ 21	9	\$	231	\$ 243
30"W x 15"D	851530M	\$ 24	3	\$	256	\$ 269
36"W x 15"D	851536M	\$ 27	1	\$	285	\$ 300
42"W x 15"D	851542M	\$ 28	1	\$	295	\$ 311
48"W x 15"D	851548M	\$ 29	6	\$	311	\$ 327
54"W x 15"D	851554M	\$ 33	5	\$	352	\$ 369
60"W x 15"D	851560M	\$ 37	5	\$	389	\$ 404
66"W x 15"D	851566M	\$ 38	8	\$	410	\$ 427
72"W x 15"D	851572M	\$ 40	3	\$	426	\$ 443



Corner Countertops — mus	st order brackets				
15"D x 24"W x 24"W	852424M	\$ 423	\$ 447	\$ 465	
15"D x 30"W x 30"W	853030M	\$ 492	\$ 519	\$ 540	
15"D x 36"W x 36"W	853636M	\$ 546	\$ 575	\$ 600	
15"D x 42"W x 42"W	854242M	\$ 592	\$ 623	\$ 651	



48"W

120° Corner Count	ertops — must order brackets				
30"W	853030BM	\$	687	\$ 722	\$ 754
36"W	853636BM	\$	765	\$ 803	\$ 840
42 "W/	95/2/2PM	¢	916	¢ 957	4 904

OPTIONS:		
SUFFIX	OPTION — Routed to fit Painted Variable Height Trim	UPCHARGE
RS	For routing one end of a straight countertop, when used in variable height panel applications.	None
RR*	For routing right end of corner countertops, when used in variable height panel applications.	None
RL*	For routing left end of corner countertops, when used in variable height panel applications.	None
RB*	For routing both ends of a straight or corner countertop when used in variable height panel applications.	None
	*Note: "Right end" and "left end" are determined by facing the inside radius of the corner countertop.	

854848BM

How to specify — Select the Concensys	1st Option: Laminate (Countertops only):	1st Option: Paint (for Brackets only):	2nd Option: Edge Trim Color (Countertops only):
Model Number from above.	See inside front cover for finishes.	See inside front cover for finishes.	See inside front cover for finishes.
8 5 .			

Concensys – 1/2017 allsteeloffice.com | 63

Worksurfaces 9120 Program

ORDERING

The 9120 Program can be used to order particle board rectangular worksurfaces in any non-standard width and depth in $\frac{1}{8}$ " increments up to a maximum of 120" W x 36" D.

Specify:

1. Model Number

Specify closest nominal width/depth model (round up).

2. Grommet Option (if desired)

See grommet specification instructions on this page.

3. Grommet Type:

P Plastic

M Metal (add \$11 per grommet for laminate)

4. Grommet Color:

(Metal only)

EL Matte Silver

NOTE: Plastic grommet will match flat edge.

5. Laminate Choices

See inside front cover.

6. Flat Edge Color Choices

See EDGE COLORS inside front cover for laminates.

7. Exact Size

Specify the **EXACT Width** and **EXACT Depth** you require.

Width and depth is specified in ½" increments which is denoted as a single digit following the whole number dimension at the end of the model number string.

1/8"	=	1	⁵ / ₈ " = 5
2/8"	=	2	⁶ / ₈ " = 6
3/8"	=	3	⁷ / ₈ " = 7
4/8 "	=	4	no extra increment

For example, when ordering a worksurface that is $34\frac{1}{8}$ W x $20\frac{1}{2}$ D, specification should be 345 W x 204 D.

Example: 9120R3624.G0.TM33.EU.345Wx204D.



PRODUCT SPECIFICATIONS

- Flat Edge on all sides
- 45 lb. particle board
- 11/4" top thickness
- .020 resin impregnated paper backer sheet
- Grommets available
- Maximum width 120" (maximum recommended unsupported span is 42")
- Maximum depth 36"
- Standard Allsteel laminates
- Quantities of 10 or greater are palletized; less than 10 are individually cartoned.

Note: 9120 worksurface maximum unsupported span is 42". 9120 worksurfaces do not have pre-drilled pilot holes or threaded metal inserts

When spanning multiple freestanding storage units with one worksurface, add $\frac{1}{8}$ " for each additional storage unit. For example, when ordering a worksurface for three 30"W lateral files. 3 units x 30" = 90" + $\frac{1}{8}$ " + $\frac{1}{8}$ " = 90 $\frac{1}{4}$ " worksurface. Do NOT follow this rule if panel wrapping storage units.


Laminate Worksurfaces / Non-Standard Sizes

CHANGES / CANCELLATIONS

No changes/cancellations for 9120 Program Worksurfaces.

GROMMET SPECIFICATIONS

Plastic grommets are made of durable ABS plastic and grommets match edge color on laminate worksurfaces. Metal grommets are only available Matte Silver oval for laminate.



PRICING

One Grommet -	GC, GL, or GR Position	\$17.00
Two Grommets -	G3 or G4 Position	\$34.00
NOTE: Add \$11 per	grommet for Metal grommets with	laminate.

ORDERING


Specify grommet location and color.

Example: 9120R10836.GCP.TM33.EU.1022Wx326D

Code Grommet Position

- GC Centered side-to-side 3½" from rear to grommet edge; 4½" from rear to grommet center
- GL 3" from left side 3\%" from rear to grommet edge; 4\\\'\2" from rear to grommet center
- GR 3" from right side 31/s" from rear to grommet edge; 41/2" from rear to grommet center
- G3 Pair of grommets each 18" from side edge 31/4" from rear to grommet edge; 41/2" from rear to grommet center (Position G3 not available on tops 60"W or less.)
- G4 Pair of grommets each 31/8" from side edge 31/8" from rear to grommet edge; 41/2" from rear to grommet center
- G0 No grommets

Dimensions are from grommet center line to top edge.

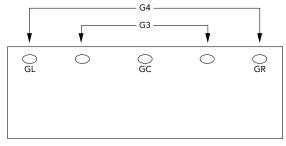

Rectangular Top

Grommet positions other than those shown above are considered non-standard.

For specification information see page 64.

Laminate Worksurfaces / Non-Standard Sizes

GSA SIN 711-1

9120 Program

Maximum	Model	Width		Depth		Laminate List Price			
IVIAXIIIIUIII	Number*	MIN	MAX	MIN	MAX	L1	L2	L3	
8"D									
18"W	9120R1818	180W	180W	121D	180D	\$ 288	\$ 303	\$ 318	
24"W	9120R2418	181W	240W	121D	180D	\$ 300	\$ 315	\$ 331	
30"W	9120R3018	241W	300W	121D	180D	\$ 312	\$ 328	\$ 344	
36"W	9120R3618	301W	360W	121D	180D	\$ 341	\$ 358	\$ 376	
42"W	9120R4218	361W	420W	121D	180D	\$ 376	\$ 395	\$ 414	
48"W	9120R4818	421W	480W	121D	180D	\$ 434	\$ 458	\$ 477	
60"W	9120R6018	481W	600W	121D	180D	\$ 539	\$ 568	\$ 592	
72"W	9120R7218	601W	720W	121D	180D	\$ 650	\$ 683	\$ 714	
84"W	9120R8418	721W	840W	121D	180D	\$ 851	\$ 893	\$ 936	
96"W	9120R9618	841W	960W	121D	180D	\$ 880	\$ 924	\$ 967	
108"W	9120R10818	961W	1080W	121D	180D	\$ 1006	\$ 1055	\$ 1105	
120"W	9120R12018	1081W	1200W	121D	180D	\$ 1146	\$ 1203	\$ 1258	
4"D									
24"W	9120R2424	181W	240W	181D	240D	\$ 326	\$ 342	\$ 360	
30"W	9120R3024	241W	300W	181D	240D	\$ 339	\$ 356	\$ 374	
36"W	9120R3624	301W	360W	181D	240D	\$ 371	\$ 390	\$ 408	
42"W	9120R4224	361W	420W	181D	240D	\$ 404	\$ 427	\$ 444	
48"W	9120R4824	421W	480W	181D	240D	\$ 460	\$ 485	\$ 505	
60"W	9120R6024	481W	600W	181D	240D	\$ 566	\$ 596	\$ 623	
72"W	9120R7224	601W	720W	181D	240D	\$ 676	\$ 711	\$ 742	
84"W	9120R8424	721W	840W	181D	240D	\$ 880	\$ 924	\$ 967	
96"W	9120R9624	841W	960W	181D	240D	\$ 909	\$ 954	\$ 999	
108"W	9120R10824	961W	1080W	181D	240D	\$ 1035	\$ 1086	\$ 1137	
120"W	9120R12024	1081W	1200W	181D	240D	\$ 1173	\$ 1231	\$ 1289	
0"D	·				'				
30"W	9120R3030	241W	300W	241D	300D	\$ 391	\$ 413	\$ 430	
36"W	9120R3630	301W	360W	241D	300D	\$ 412	\$ 435	\$ 453	
42"W	9120R4230	361W	420W	241D	300D	\$ 438	\$ 462	\$ 481	
48"W	9120R4830	421W	480W	241D	300D	\$ 474	\$ 500	\$ 521	
60"W	9120R6030	481W	600W	241D	300D	\$ 622	\$ 653	\$ 681	
72"W	9120R7230	601W	720W	241D	300D	\$ 710	\$ 746	\$ 779	
84"W	9120R8430	721W	840W	241D	300D	\$ 1077	\$ 1130	\$ 1183	
96"W	9120R9630	841W	960W	241D	300D	\$ 1103	\$ 1157	\$ 1212	
108"W	9120R10830	961W	1080W	241D	300D	\$ 1242	\$ 1303	\$ 1365	
120"W	9120R12030	1081W	1200W	241D	300D	\$ 1382	\$ 1450	\$ 1518	
6"D		1 172	1			1		1	
36"W	9120R3636	301W	360W	301D	360D	\$ 556	\$ 585	\$ 611	
42"W	9120R4236	361W	420W	301D	360D	\$ 633	\$ 666	\$ 695	
48"W	9120R4836	421W	480W	301D	360D	\$ 711	\$ 747	\$ 780	
60"W	9120R6036	481W	600W	301D	360D	\$ 870	\$ 913	\$ 956	
72"W	9120R7236	601W	720W	301D	360D	\$ 1025	\$ 1076	\$ 1126	
84"W	9120R8436	721W	840W	301D	360D	\$ 1023	\$ 1303	\$ 1365	
96"W	9120R9636	841W	960W	301D	360D	\$ 1271	\$ 1334	\$ 1396	
108"W	9120R10836	961W	1080W	301D	360D	\$ 1410	\$ 1479	\$ 1550	
	/ 12UN 10030	701 W	1000 W	301D	5000	טו+וע ן	4 14/7	ψ 133U	

For specification information see pages 38-46.

GSA SIN 711-1

 ${\sf Concensys}^{\tt o} - {\sf Primary} - {\sf T-Mold} \ {\sf Edge}$






Edge Profile

	<u></u>	List Price	
Model	L1	L2	L3
832424A	\$ 194	\$ 205	\$ 215
832430A	\$ 197	\$ 208	\$ 218
832436A	\$ 210	\$ 221	\$ 232
832442A	\$ 256	\$ 269	\$ 282
832448A	\$ 276	\$ 290	\$ 304
832454A	\$ 302	\$ 317	\$ 333
832460A	\$ 340	\$ 357	\$ 375
832466A	\$ 370	\$ 389	\$ 407
832472A	\$ 388	\$ 409	\$ 427
833024A	\$ 197	\$ 208	\$ 218
833030A	\$ 203	\$ 214	\$ 225
833036A	\$ 228	\$ 240	\$ 252
833042A	\$ 283	\$ 297	\$ 313
833048A	\$ 302	\$ 317	\$ 333
833054A	\$ 335	\$ 352	\$ 369
833060A	\$ 374	\$ 393	\$ 412
833066A	\$ 403	\$ 425	\$ 443
833072A	\$ 436	\$ 459	\$ 479
for no grommet, no upcharge.			
831212A	\$ 161	\$ 170	\$ 177
	832430A 832436A 832442A 832448A 832454A 832460A 832466A 832472A 833024A 833030A 833036A 833042A 833048A 833054A 833060A 833060A	832424A \$ 194 832430A \$ 197 832436A \$ 210 832442A \$ 256 832448A \$ 276 832454A \$ 302 832460A \$ 340 832466A \$ 370 832472A \$ 388 833024A \$ 197 833030A \$ 203 833036A \$ 228 833042A \$ 283 833042A \$ 382 833042A \$ 302 833054A \$ 302	Model L1 L2 832424A \$ 194 \$ 205 832430A \$ 197 \$ 208 832436A \$ 210 \$ 221 832442A \$ 256 \$ 269 832448A \$ 276 \$ 290 832454A \$ 302 \$ 317 832460A \$ 340 \$ 357 832472A \$ 388 \$ 409 833024A \$ 197 \$ 208 833030A \$ 203 \$ 214 83304A \$ 228 \$ 240 83304A \$ 302 \$ 317 83305AA \$ 283 \$ 297 83306A \$ 335 \$ 352 83306A \$ 374 \$ 393 83306A \$ 403 \$ 425 833072A \$ 436 \$ 459

FOR PRIMARY WORKSURFACES TO SPAN A "T" OR EXTENDED STRAIGHT CONNECTION,	Suffix	Upcharge
ADD SUFFIX AND UPCHARGE.	т т	\$32



		List
Description	Model	Price
External Worksurface Support Channel (no color option) — 1½"H		
30"W External Support Channel for use on 42"W Worksurface	Z5SC42 S	\$ 50
36"W External Support Channel for use on 48"W Worksurface	Z5SC48 S	\$ 52
42"W External Support Channel for use on 54"W Worksurface	Z5SC54 S	\$ 59
48"W External Support Channel for use on 60"W Worksurface	Z5SC60	\$ 64
54"W External Support Channel for use on 66"W Worksurface	Z5SC66	\$ 73
60"W External Support Channel for use on 72"W Worksurface	Z5SC72	\$ 79
66"W External Support Channel for use on 78"W Worksurface	Z5SC78	\$ 86
72"W External Support Channel for use on 84"W Worksurface	Z5SC84	\$ 95

How to specify — Select the Concensys Model Number from above.	1st Option: Laminate: See inside front cover for finishes.	2nd Option: T-Mold: See inside front cover for finishes.	3rd Option: Grommet Type: P Plastic M Metal (add \$11 per grommet)	4th Option: Grommet Color (Metal only): EL Matte Silver Note: Plastic grommet color matches trim selection.
8 3 A .				E L

Examples: 832424A.LT3B.EY.MEL 832424ATN.LT3B.EY Z5SC42

For specification information see pages 38-46.

GSA SIN 711-1





			List Pri	ce	
Description	S	Model	L1	L2	L3
Wave Worksurfaces					
30"W x 24"L x 30"R	11½"	8302430A	\$ 23	5 \$ 247	\$ 260
36"W x 24"L x 30"R	13½"	8362430A	\$ 26	0 \$ 273	\$ 287
42"W x 24"L x 30"R	15½"	8422430A	\$ 32	6 \$ 342	\$ 360
48"W x 24"L x 30"R	15½"	8482430A	\$ 34	7 \$ 364	\$ 382
54"W x 24"L x 30"R	21½"	8542430A	\$ 38	2 \$ 403	\$ 421
60"W x 24"L x 30"R	27½"	8602430A	\$ 42	9 \$ 452	\$ 472
66"W x 24"L x 30"R	33½"	8662430A	\$ 46	1 \$ 485	\$ 506
72"W x 24"L x 30"R	39½"	8722430A	\$ 49	6 \$ 522	\$ 545

 ${\sf Concensys}^{\tt @} - {\sf Wave / Bow-Front} - {\sf T-Mold Edge}$





11½"	8303024A	\$	235	\$	247	\$	260
13½"	8363024A	\$	260	\$	273	\$	287
15½"	8423024A	\$	326	\$	342	\$	360
15½"	8483024A	\$	347	\$	364	\$	382
21½"	8543024A	\$	382	\$	403	\$	421
271/2"	8603024A	\$	429	\$	452	\$	472
33½"	8663024A	\$	461	\$	485	\$	506
391/2"	8723024A	\$	496	\$	522	\$	545
	13½" 15½" 15½" 21½" 27½" 33½"	13½" 8363024A 15½" 8423024A 15½" 8483024A 21½" 8543024A 27½" 8603024A 33½" 8663024A	13½" 8363024A \$ 15½" 8423024A \$ 15½" 8483024A \$ 21½" 8543024A \$ 27½" 8603024A \$ 33½" 8663024A \$	13½" 8363024A \$ 260 15½" 8423024A \$ 326 15½" 8483024A \$ 347 21½" 8543024A \$ 382 27½" 8603024A \$ 429 33½" 8663024A \$ 461	13½" 8363024A \$ 260 \$ 15½" 8423024A \$ 326 \$ 15½" 8483024A \$ 347 \$ 21½" 8543024A \$ 382 \$ 27½" 8603024A \$ 429 \$ 33½" 8663024A \$ 461 \$	13½" 8363024A \$ 260 \$ 273 15½" 8423024A \$ 326 \$ 342 15½" 8483024A \$ 347 \$ 364 21½" 8543024A \$ 382 \$ 403 27½" 8603024A \$ 429 \$ 452 33½" 8663024A \$ 461 \$ 485	13½" 8363024A \$ 260 \$ 273 \$ 15½" 8423024A \$ 326 \$ 342 \$ 15½" 8483024A \$ 347 \$ 364 \$ 21½" 8543024A \$ 382 \$ 403 \$ 27½" 8603024A \$ 429 \$ 452 \$ 33½" 8663024A \$ 461 \$ 485 \$



Bow-Front Worksurfaces

60 "W x 30 "D 1 x 36 "D 2	833660BTA	\$ 648	\$ 681	\$ 712
66"W x 30"D1 x 36"D2	833666BTA	\$ 706	\$ 742	\$ 775
72"W x 30"D1 x 36"D2	833672BTA	\$ 759	\$ 797	\$ 834

Note: Add Suffix "N" to model number for no grommet, no upcharge.

	- w	-
↑ D¹	0	D ²

How to specify — Select the Concensys Model Number from above.	1st Option: Laminate: See inside front cover for finishes.	2nd Option: T-Mold: See inside front cover for finishes.	3rd Option: Grommet Type (if applicable): P Plastic M Metal (add \$11 per grommet)	4th Option: Grommet Color (Metal only): EL Matte Silver Note: Plastic grommet color matches trim selection.	
8 .	 nple: 83024304 LT3	R FX P		E L	

Example: 8302430A.LT3B.EX.F

Concensys® — Corner, 135°, 120°, 60° — T-Mold Edge

\$ 342


\$ 359

\$ 377

For specification information see pages 38-46.

GSA SIN 711-1

List Price



Description	Model		LZ	LJ
Corner Worksurfaces Wi	th Straight Leading Edge			
36"W x 24"D	833624A	\$ 409	\$ 431	\$ 450
42"W x 24"D	834224A	\$ 470	\$ 495	\$ 516
48"W x 24"D	834824A	\$ 495	\$ 521	\$ 543
42"W x 30"D	834230A	\$ 528	\$ 555	\$ 580
48"W x 30"D	834830A	\$ 588	\$ 619	\$ 646



36"W x 24"D	833624RA	\$ 452 \$ 476 \$ 49
42"W x 24"D	834224RA	\$ 503 \$ 529 \$ 55
48"W x 24"D	834824RA	\$ 525 \$ 552 \$ 57
42"W x 30"D	834230RA	\$ 580 \$ 610 \$ 63
48"W x 30"D	834830RA	\$ 647 \$ 680 \$ 71




30"W x 24"D	833024BA	\$ 546	\$ 574	\$ 600
36"W x 24"D	833624BA	\$ 607	\$ 639	\$ 667
42"W x 24"D	834224BA	\$ 652	\$ 686	\$ 716
48"W x 24"D	834824BA	\$ 715	\$ 751	\$ 785




24"D

Note: Add Suffix "N" to model number for no grommet, no upcharge.

802424SDA



Description	Model	L1 List Price	L2 List Price	L3 List Price
Corner Shelves with T-Mol	d Edge			
36" x 36" x 11"D	860536	\$ 460	\$ 485	\$ 506
42" x 42" x 11"D	860542	\$ 478	\$ 504	\$ 526
48" x 48" x 11"D	860548	\$ 453	\$ 476	\$ 496

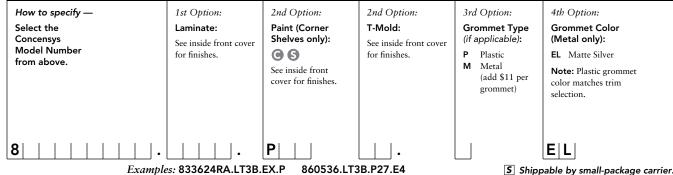

For specification information see pages 38-46.

GSA SIN 711-1

 ${\sf Concensys}^{\tt @} - {\sf Corner} \; {\sf Cove} - {\sf T-Mold} \; {\sf Edge}$



			L	ist Price	
Description	Model		L1	L2	L3
Corner Cove Worksurfaces –	– Extended Left				
60" x 36" — 24"L / 24"R	83122EL	\$	503	529	\$ 552
60" x 36" — 24"L / 30"R	83132EL	\$	524	5 551	\$ 576
60" x 48" — 24"L / 24"R	83622EL	\$	588 9	619	\$ 646
60" x 48" — 30"L / 24"R	83623EL	\$	615	647	\$ 676
60" x 48" — 24"L / 30"R	83632EL	\$	615	647	\$ 676
60" x 48" — 30"L / 30"R	83633EL	\$	636	669	\$ 699
72" x 36" — 24"L / 24"R	83222EL	\$		619	\$ 646
72" x 36" — 24"L / 30"R	83232EL	\$	615	647	\$ 676
72" x 48" — 24"L / 24"R	83722EL	\$		787	\$ 823
72" x 48" — 30"L / 24"R	83723EL	\$	777 9		\$ 853
72" x 48" — 24"L / 30"R	83732EL	\$		816	\$ 853
72" x 48" — 30"L / 30"R	83733EL	\$	799	839	\$ 877
Corner Cove Worksurfaces –					
36" x 60" — 24"L / 24"R	83122ER	\$		5 529	\$ 552
36" x 60" — 30"L / 24"R	83132ER	\$	524	5 551	\$ 576
48" x 60" — 24"L / 24"R	83622ER	\$		619	\$ 646
48" x 60" — 24"L / 30"R	83623ER	\$		647	\$ 676
48" x 60" — 30"L / 24"R	83632ER	\$		647	\$ 676
48" x 60" — 30"L / 30"R	83633ER	\$	636	669	\$ 699
36" x 72" — 24"L / 24"R	83222ER	\$		619	\$ 646
36" x 72" — 30"L / 24"R	83232ER	<u> </u>	615	647	\$ 676
48" x 72" — 24"L / 24"R	83722ER	· · · · · · · · · · · · · · · · · · ·		787	\$ 823
48" x 72" — 24"L / 30"R	83723ER	\$		816	\$ 853
48" x 72" — 30"L / 24"R	83732ER	\$	777 5		\$ 853
48" x 72" — 30"L / 30"R	83733ER	\$	799	839	\$ 877

Note: Add Suffix "N" to model number for no grommet, no upcharge.

How to specify —	1st Option:	2nd Option:	3rd Option:	4th Option:	
Select the Concensys Model Number from above.	Laminate: See inside front cover for finishes.	T-Mold: See inside front cover for finishes.	Grommet Type: P Plastic M Metal (add \$11 per grommet)	Grommet Color (Metal only): EL Matte Silver Note: Plastic grommet color matches trim selection.	
8 3				EL	

Example: 83622EL.LT3B.EV.MEL

Concensys® – Peninsula / P-Shaped – T-Mold Edge

For specification information see pages 38-46.

GSA SIN 711-1



			List Price	
Description	Model	L1	L2	L3
Peninsula Worksurfaces				
30"W x 60"L	833160A	\$ 470	\$ 495	\$ 516
30"W x 66"L	833166A	\$ 569	\$ 599	\$ 625
30"W x 72"L	833172A	\$ 658	\$ 692	\$ 723
36"W x 60"L	833660A	\$ 545	\$ 573	\$ 599
36"W x 66"L	833666A	\$ 656	\$ 690	\$ 720
36"W x 72"L	833672A	\$ 767	\$ 806	\$ 842



P-Shaped Peninsula Worksurfaces

30"W x 72"L Left-Hand Peninsula Worksurface	833272LA	\$ 1059	\$ 1111	\$ 1163
30"W x 72"L Right-Hand Peninsula Worksurface	833272RA	\$ 1059	\$ 1111	\$ 1163

Note: Add Suffix "N" to model number for no grommet, no upcharge.


How to specify — Select the Concensys Model Number from above.	1st Option: Laminate: See inside front cover for finishes.	2nd Option: T-Mold: See inside front cover for finishes.	3rd Option: Grommet Type: P Plastic M Metal (add \$11 per grommet)	4th Option: Grommet Color (Metal only): EL Matte Silver Note: Plastic grommet color matches trim selection.
8 .				E L

For specification information see pages 38-46.

GSA SIN 711-1



Support column and flat brackets ordered separately.




Concensys® - Quarter-Round / D-Shaped - T-Mold Edge






D-Shaped Worksurfaces


D-Shaped Worksurface Connects to two 24"D Worksurfaces	832407A	\$ 326	\$ 342	\$ 360
D-Shaped Worksurface Connects to two 30"D Worksurfaces	833007A	\$ 393	\$ 414	\$ 433




Support column and 11" end panels ordered separately.

Note: Cantilever brackets should not be used in place of end panels in this application.





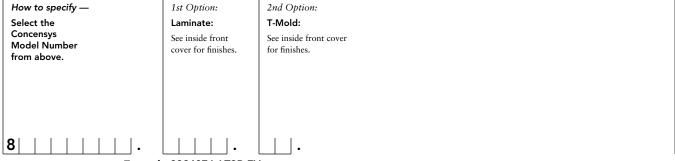


Example: 832407A.LT3B.EV

 ${\sf Concensys}^{\tt @} - {\sf Countertops} - {\sf T-Mold} \ {\sf Edge}$

GSA SIN 711-1







			Lis	t Price	
Description	Model	L1		L2	L3
Straight Countertops — must order bracke	ts				
24"W x 15"D	851524	\$ 198	\$	209	\$ 219
30"W x 15"D	851530	\$ 211	\$	222	\$ 233
36"W x 15"D	851536	\$ 228	\$	240	\$ 252
42"W x 15"D	851542	\$ 247	\$	260	\$ 273
48"W x 15"D	851548	\$ 254	\$	267	\$ 280
54"W x 15"D	851554	\$ 260	\$	273	\$ 287
60"W x 15"D	851560	\$ 271	\$	285	\$ 299
66"W x 15"D	851566	\$ 291	\$	306	\$ 321
72"W x 15"D	851572	\$ 315	\$	331	\$ 348



Corner Countertops — must order brackets					
24"W x 24"D	852424	\$ 422 \$ 444 \$ 464			
30"W x 30"D	853030	\$ 442 \$ 465 \$ 486			
36"W x 36"D	853636	\$ 455 \$ 479 \$ 500			
42"W x 42"D	854242	\$ 511 \$ 537 \$ 562			



120° Countertops — must ord	der brackets	
30"W x 30"W	853030BA	\$ 580 \$ 610 \$ 637
36"W x 36"W	853636BA	\$ 646 \$ 679 \$ 710
42"W x 42"W	854242BA	\$ 689 \$ 724 \$ 756
48"W x 48"W	854848BA	\$ 760 \$ 798 \$ 835

PTIONS:		
SUFFIX	OPTION	UPCHARGE
RS	For routing one end of a straight countertop, when used in variable height panel applications.	None
RR*	For routing right end of corner countertops, when used in variable height panel applications.	None
RL*	For routing left end of corner countertops, when used in variable height panel applications.	None
RB*	For routing both ends of a straight or corner countertop when used in variable height panel applications.	None
	*Note: "Right end" and "left end" are determined by facing the inside radius of the corner counterton	

How to specify — Select the Concensys Model Number from above.	1st Option: Laminate (Countertops only): See inside front cover for finishes.	1st Option: Paint (for Brackets only): ⑤ ⑤ See inside front cover for finishes.	2nd Option: T-Mold (Countertops only): See inside front cover for finishes.
8 5 .		P	

For specification information see pages 38-46.

GSA SIN 711-1


\$ 75

64

Concensys® — Worksurface Supports







Description	Model	P1 List Price	P2 List Price
End-Panel Supports			
11"D x 29½"H Panel-Mount	CEP1129P S	\$ 176	\$ 209
24"D x 29½"H Panel-Mount	CEP2429P S	\$ 189	\$ 222
30"D x 29½"H Panel-Mount	CEP3029P 5	\$ 206	\$ 239

Support Legs

24"D x 29½"H Panel-Mount	CSL2429P 5	\$ 167 \$ 200
30"D x 29½"H Panel-Mount	CSL3029P S	\$ 182 \$ 215

Concensys Open End Panel Supports

12"D x 29½"H Panel-Mount	ACBHEP1229 5	\$ 1	/2 \$	206
24"D x 29½"H Panel-Mount	ACBHEP2429 S	\$ 1	81 \$	215
30"D x 29½"H Panel-Mount	ACBHEP3029 S	\$ 1	96 \$	230

 ${\sf Cantilever\ Bracket-Concensys}$

12"D Left-Hand	CCB12L 5	\$ 46	\$ 57
12"D Right-Hand	CCB12R 5	\$ 46	\$ 57
18"D Left-Hand	CCB18L S	\$ 49	\$ 60
18"D Right-Hand	CCB18R 5	\$ 49	\$ 60
24" or 30"D Left-Hand	CCB24L 5	\$ 54	\$ 65
24" or 30"D Right-Hand	CCB24R 5	\$ 54	\$ 65

Universal Cantilever

24" or 30"D	T624CB	5	\$	131	N/A	4
Worksurface-to-Panel Brackets						
24"D	021224	C	¢	6.1	¢ 7	

5

831330

Worksurface Bracket Kit				
One Pair	831099	S	\$ 46	\$ 57

Flat Brackets

30"D

12"D	T612FB S	\$ 41	N/A
24"D	831124 S	\$ 46	N/A
30"D	831130 S	\$ 50	N/A

Note: Flint only.

Padastal-to-Panal	Attachment	Brackets

Pedestal-to-Panel Attachment	Brackets		
Left-handed	831500L	\$ 75	\$ 86
Right-handed	831500R	\$ 75	\$ 86

How to specify — Select the Concensys Model Number from above.

1st Option:

Paint (if applicable):



See inside front cover for finishes.

Example: CEP1129P.P28

831324.P28 831124

Cadence® Freestanding


Concensys® — Freestanding Components

For specification information see pages 47-55.

GSA SIN 711-2



Factory-configured as non-handed unit.

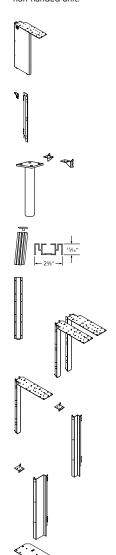

Description	Model		e Paint ist Price		ct Paint ist Price
End-Panel Supports	Model		or mee		36 1 1100
11"D x 29½"H – Freestanding	CEP1129F	\$	156	\$	189
24"D x 29½"H – Freestanding	CEP2429F	\$	169	\$	202
30"D x 29½"H – Freestanding	CEP3029F	\$	186	\$	219
11"D x 29½"H – Panel-Mount	CEP1129P	\$	176	\$	209
24"D x 29½"H – Panel-Mount	CEP2429P	\$	189	\$	222
30"D x 29½"H – Panel-Mount	CEP3029P	\$	206	\$	239
	GSA — Above pricing reflects sy	ystems fur	niture p	ricing s	chedule.

	GSA —	- Above	pricing	reflects	systems	turniture	pricing	schedule
upport legs								

24"D x 29½"H - Freestanding	CSL2429F S	\$ 146	\$ 179
30"D x 29½"H – Freestanding	CSL3029F S	\$ 162	\$ 195
24"D x 29½"H – Panel-Mount	CSL2429P S	\$ 167	\$ 200
30"D x 29½"H – Panel-Mount	CSL3029P S	\$ 182	\$ 215

GSA — Above pricing reflects systems furniture pricing schedule.

29½"H	CPMB29	S	\$ 37	\$ 48
Support Columns				
For 29½" Height, 3" Diameter	830299	5	\$ 158	\$ 191

Concensys Permanent-Wall Hanger Kit			
One Pair (Double Wall Track) 23/8 "W x 15/16"D x 651/4"L	801550	\$ 118	\$ 139
Nickey Angles of desires and a consulted socials also are del			

Note: Anchor devices are not supplied with this model.

Panel-Mount End-Panel/Support Leg Bracketry

Corner Desk Leg					
29½"H	CDL29	5	\$ 135	\$ 154	

Bridge Kit				
29½"H	CBK29	S	\$ 140	\$ 151

Return Kit					
29½"H	CRK29	S	\$ 74	\$ 8	2

29½"H	CRK29	5	\$ 74	\$ 82

Desk-to-Panel Attachment Kits			
29½"H – LH	CDPA29L S	\$ 75	\$ 86
29½"H – RH	CDPA29R 5	\$ 75	\$ 86

29½"H – LH	CCWD29L 5	\$ 75	\$ 86
29½"H – RH	CCWD29R 5	\$ 75	\$ 86

· idi zi dello to				
24"D	831124	S	\$ 46	N/A
30"D	831130	5	\$ 50	N/A

Note: Flint only.



Examples: CEP1129F.P28 831124

Shippable by small-package carrier.


Cadence® Freestanding

For specification information see pages 47-55.

GSA SIN 711-2

 ${\sf Concensys}^{\tt @} - {\sf Modesty} \ {\sf Panels} \ {\sf and} \ {\sf Gussets}$

			Core Paint	Select Paint
	Description	Model	P1 List Price	P2 List Price
	Modesty Panels			
	29½"H x 24"W	CS249 S	\$ 151	\$ 170
H H	29½"H x 30"W	CS309 S	\$ 156	\$ 175
	29½"H x 36"W	CS369 5	\$ 160	\$ 179
	29½"H x 42"W	CS429 5	\$ 164	\$ 183
	29½"H x 48"W	CS489 5	\$ 167	\$ 186
	29½"H x 54"W	CS549 5	\$ 169	\$ 188
	29½"H x 60"W	CS609	\$ 172	\$ 191
	29½"H x 66"W	CS669	\$ 174	\$ 193
	29½"H x 72"W	C\$729	\$ 180	\$ 199
	Stand-alone Corner Modesty Panels			
	29½"H x 36"W	CSCMP3629 5	\$ 160	\$ 179
1 1	29½"H x 42"W	CSCMP4229 5	\$ 164	\$ 183
	29½"H x 48"W	CSCMP4829 5	\$ 167	\$ 186
1 1	29½"H x 60"W	CSCMP6029	\$ 172	\$ 191
	29½"H x 72"W	CSCMP7229	\$ 180	\$ 199
	Modesty Panels			
	14"H x 24"W	CS244 5	\$ 143	\$ 162
	14"H x 30"W	CS304 5	\$ 147	\$ 166
	14"H x 36"W	CS364 5	\$ 150	\$ 169
_	14"H x 42"W	CS424 5	\$ 154	\$ 173
	14"H x 48"W	CS484 5	\$ 159	\$ 178
	14"H x 54"W	CS544 5	\$ 162	\$ 181
	14"H x 60"W	CS604	\$ 167	\$ 186
	14"H x 66"W	CS664	\$ 169	\$ 188
	14"H x 72"W	CS724	\$ 172	\$ 191
	Stand-alone Corner Modesty Panels			
	14"H x 36"W	CSCMP3614 S	\$ 150	\$ 169
1 1	14"H x 42"W	CSCMP4214 S	\$ 154	\$ 173
	14"H x 48"W	CSCMP4814 S	\$ 159	\$ 178
	14"H x 60"W	CSCMP6014	\$ 167	\$ 186
	14"H x 72"W	CSCMP7214	\$ 172	\$ 191
A	Gussets			
	One pair	CDG S	\$ 110	\$ 129

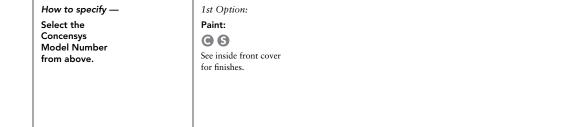

Examples: CS249.PR3 CS244.P28

Cadence® Freestanding

For specification information see pages 47-55.

GSA SIN 711-2

Concensys® — Universal Modesty Panels

Core Paint


P1 List Price

\$ 176

\$ 181

\$ 192

\$ 197



Description Modesty Panels	Model	List Price
41"W	PMP41 S	\$ 210
47"W	PMP47 S	\$ 214
53"W	PMP53 S	\$ 220

Universal Modesty Panels for Concensys Worksurfaces							
	F	Peninsul	а	P-Shape	Je	tty	Boomerang
Model	60"L	66"L	72"L	72"L	66"L	72"L	72"L
PMP41	•						
PMP47		•		•	•		
PMP53			•			•	•

Model

CSDC19 S

CSDC25 S




• 12" drawer extension (3/4).

Description

Metal Center Drawer w/Lock 19"W x 14¾"D x 3"H


- Inside drawer dimension: 19"W x 13"D x 23/8"H.
- Minimum clearance for mounting: 21¾"W x 19¼"D.



12" drawer extension (3/4).

24¾"W x 14¾"D x 3"H

- Inside drawer dimension: $24\frac{1}{2}$ "W x $13\frac{1}{2}$ "D x $2\frac{3}{8}$ "H.
- Minimum clearance for mounting: 273/8 "W x 191/4"D.

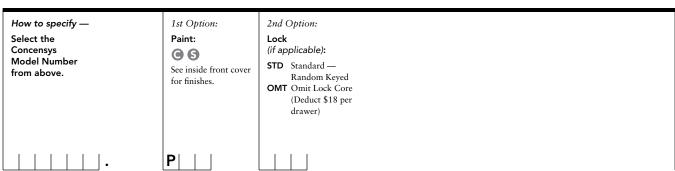

Example: PMP41.P27 CSDC19.P28.STD

Shippable by small-package carrier.

Storage

Storage Introduction and Overview86-8	/
Working with Essentials™ Metal Storage	4
Working with Cubby Laminate Storage	5
Support and Suspended Pedestals	6
Mobile Pedestals	7
Basic Support and Mobile Pedestals	8
Accessories and Pedestal Tops for Essentials	9
Personal Files	0
50"H and 65"H Towers	1
Lateral Files and Accessories	2
Combination Files, Storage Cabinets, and Bookcases	13
Laminate Tops for Essentials Storage	4
Cubby Laminate Storage and Shelves	4

${\bf Additional\ All Steel\ Storage\ Solutions\ are\ available\ in\ the\ Storage\ and\ Stride\ Price\ Lists:}$

- Align™ Metal and Veneer Pedestals, Personal Files, Credenzas, Towers, Lockers, Laterals, Combination Files, and Bookcases
- Involve® Laminate Pedestals, Credenzas, Towers, Stacking Storage, Overheads, Soft Seating, and Bookcases
- Stride Painted Wood Pedestals, Credenzas, Towers, Combination Files, and Overhead Cabinets

Concensys – 1/2017 allsteeloffice.com | 85

Storage

Storage is an essential part of the productive workplace.

Make storage a matter of personal choice as well as necessity. Choose from metal, laminate, or veneer with features like multiple pull styles, drawer sizes, finishes, and more. It's your workspace. Shouldn't it look like it?

PERSONAL STORAGE

1. Pedestal.

Support, mobile, or suspended, with three drawer sizes.

2. Personal file.

Combines pedestal and lateral storage to create a personal filing solution for letter and legal size documents.

3. Personal tower.

Versatile storage with a small footprint. It's storage that goes up, not out. Combine drawers, personal storage, and wardrobe options for the right solution.

4. Low credenza.

Active storage that creates a layered look in any workspace.

LATERALS AND SHARED STORAGE

5. Lateral file.

The storage workhorse, in multiple heights and widths. Works with systems furniture or by itself.

6. Combination file.

The perfect combination of file storage and shelf storage, with concealed or open shelves.


7. Storage cabinet.

Equipped with hinged, locking doors and adjustable shelves to conceal and secure supplies.

GSA Reference Page

8. Bookcases.

Quick access to information, in depths to match laterals or narrower profiles to stand on their own.

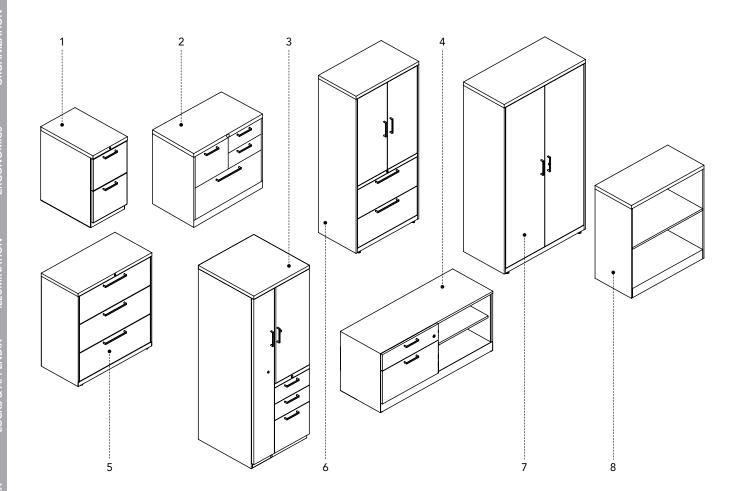

Additional Allsteel Storage Solutions are available in the Storage and Stride® System Price Lists:


- Align™ Metal and Veneer Pedestals, Personal Files, Credenzas, Towers, Lockers, Laterals, Combination Files, and Bookcases
- Involve® Laminate Pedestals, Credenzas, Towers, Stacking Storage, Overheads, Soft Seating, and Bookcases
- Stride Painted Wood Pedestals, Credenzas, Towers, Combination Files, and Overhead Cabinets


86 | Allsteel Concensys – 1/2017

GSA Reference Page


Overview

Essentials Pedestals

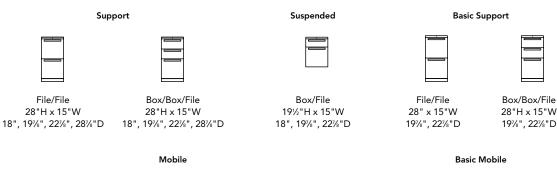

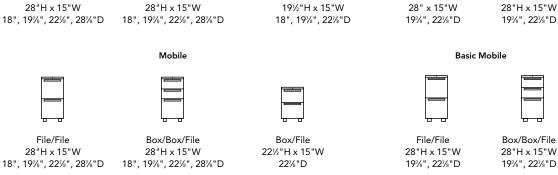




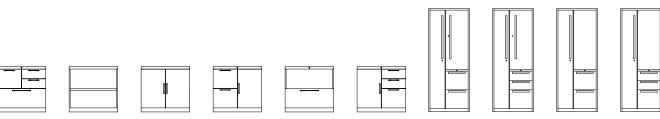

28"H x 18"D x 30"W Left and Right door configurations available


50"H, 65"H x 24"D x 24"W Left and Right door or open side shelf configurations available

Essentials Personal Towers

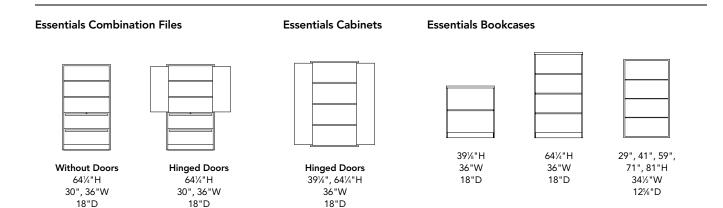

Essentials Pedestals

- File drawers can accommodate front-to-back filing on all models, and side-to-side filing on 22% "D and 28% "D models.
- Support pedestals of a maximum depth, relative to the worksurface depth, result in one panel receptacle position being inaccessible.
- 22\%"D units cannot be used with 24"D Concensys Freestanding.
- 28½"D units cannot be used with any 30"D Concensys Freestanding or any 24"D panel-hung worksurface.
- For locking specifications, see pages 122-124.
- Leveling capacity is 2" on 28"H pedestals.




Support pedestals

can support one end of a panel-attached worksurface, in lieu of other worksurface supports by using a 28 "H support pedestal but cannot be used to support freestanding desking without an end panel.



Suspended pedestals mount to the underside of the worksurface using keyhole slots in top of pedestals. Do not mount suspended pedestals on bridges or peninsulas. Always mount suspended pedestals at end of worksurfaces.

 When using suspended units on systems, a return panel should extend 18" minimum beyond leading edge of worksurface on which unit(s) is mounted.



Working with Pedestals

Mobile Pedestals can be used to provide flexible storage. The nominal height of a mobile pedestal is equal to that of a freestanding pedestal of equivalent design. There is no need to add extra height for the casters.

28"H mobile pedestals can be nested under worksurfaces mounted at 29½"H.

Mobile pedestals cannot be leveled. Take this into consideration when planning offices which may have uneven floors

Pedestal Compatability with Cadence Desking and Systems Worksurfaces					
	Cadence Freestanding	9	Systems Panel-hung \	Worksurfaces	
Pedestal Depth	24" Deep	30" Deep	24" Deep	30" Deep	
18"	Yes	Yes	Yes	Yes	
191/8"	Yes*	Yes	Yes*	Yes	
221/8"		Yes	Yes*	Yes	
281/8"				Yes*	

^{*}Wire management grommet is blocked in these applications.

Note: Pedestal placement may affect access to receptacles in base pathway.



Worksurface height mobile and worksurface supporting pedestals have a taller base plate, resulting in a taller overall cabinet height. Consideration must be made to ensure that units align visually with each other and with selected Essentials lateral files. The accompanying chart will help you select the correct pedestal for your application.

Essentials Pedestal Model begins with	Style	Overall Height	Base Height	Spacer required below worksurface	Units align with these Essentials Lateral Models begin with
xx11	Seat height	22½"	2"	na	na
xx14	Suspended	19½"	na	na	na
xx18, xx38	Worksurface height mobile	28"	31/8"	na	ELF8 (2-high only)
xx19, xx39	Worksurface supporting**	28"	31/8"	no	ELF8 (2-high only)

^{*}Units will support conventional 29½" high worksurfaces.

88 | Allsteel Concensys – 1/2017

GSA Reference Page

Pedestals Specification Information

Essentials Pedestals

Essentials Support and Suspended Pedestals (page 95)

- Steel, ball-bearing slide suspension with full-extension on file drawers, 90% extension on box drawers.
- File drawer has high sides to allow front-to-back filing.
- Side-to-side filing utilizes follower block and cross rail both standard in all pedestals.
- Pencil tray included one per pedestal with box drawers.
- Follower block (APFB80) sold separately.
- For improved aesthetics on 28"H pedestals, order flush mount kick plates.
- Support units have four leveling glides.
- Counterweight is standard in mobile pedestals.
- Support pedestals not used to support a worksurface require a counterweight kit — order separately.
- Box drawers have adjustable divider.
- Caster package available to field convert support pedestals to
- Standard core removable locks. See pages 122-124.

Essentials Mobile Pedestals (page 95)

- Steel, ball-bearing slide suspension with full-extension on file drawers, 90% extension on box drawers.
- File drawer has high sides to allow front-to-back filing.
- Side-to-side filing utilizes follower block and cross rail both standard in all pedestals.
- Pencil tray included one per pedestal with box drawers.
- Follower block (APFB80) sold separately.
- Counterweight is standard in mobile pedestals.
- Box drawers have adjustable divider.
- Rear casters swivel, front casters are fixed.
- Standard core removable locks. See pages 122-124.
- Adjustable glide kit available to field convert mobile pedestals to freestanding.
- Casters on box/file mobile pedestal require installation.
- For improved aesthetics on 28"H pedestals, order flush mount kick plates.

Essentials Basic Support Pedestals (page 96)

- Steel, ball-bearing slide suspension with 90% extension on file drawers, and 75% extension on box drawers.
- Follower block (APFB80), pencil tray (A2280-000), and adjustable divider (PD80) for box drawers sold separately.
- Side-to-side filing utilizes two cross rails (AP519495) sold separately.
- File drawer has high sides to allow front-to-back filing.
- Support pedestals not used to support a worksurface require a counterweight kit sold separately.
- Caster package available to field convert support pedestals to
- Standard core removable locks. See pages 122-124.
- Adjustable glide kit available to field convert mobile pedestals to freestanding.
- For improved aesthetics on 28"H pedestals, order flush mount kick plates.

Essentials Basic Mobile Pedestals (page 96)

- Steel, ball-bearing slide suspension with 90% extension on file drawers, and 75% extension on box drawers.
- Follower block (APFB80), pencil tray (A2280-000), and adjustable divider (PD80) for box drawers sold separately.
- Side-to-side filing utilizes two cross rails (AP519495) sold separately.
- File drawer has high sides to allow front-to-back filing.
- Counterweight is standard in mobile pedestals.
- Support pedestals not used to support a worksurface require a counterweight kit sold separately.
- Caster package available to field convert support pedestals to
- Standard core removable locks. See pages 122-124.
- Adjustable glide kit available to field convert mobile pedestals to freestanding.
- For improved aesthetics on 28"H pedestals, order flush mount kick plates.

Essentials Seat Cushion (page 97)

- · Seat cushion provides quick and convenient additional
- Seat cushion adds approximately 2"H to pedestal.
- YPPA prefix models have stitched corners and bumpers on
- ASPT prefix models have wrap around corners and attach with double-sided tape.
- COM yardage for seat cushion is ²/₃ yard.

allsteeloffice.com | 89 Concensys - 1/2017

Working with Personal Files & Towers

Essentials Personal File

Lateral File Drawer

Lateral file drawer contains dual-side locking.

File and Box Drawers

File and box drawers contain single-side locking.

Door with Shelf

Door (non-locking) with shelf contains one shelf that is adjustable in 2" increments.

Hanging Frames


Side-to-side filing comes standard in lateral drawer.

Side Knockouts

Files have knockouts on each side to allow easy ganging of freestanding units to inhibit tipping.

Inset Drawer Design

Drawers are inset inside the case. Base plate is flush with drawer fronts.

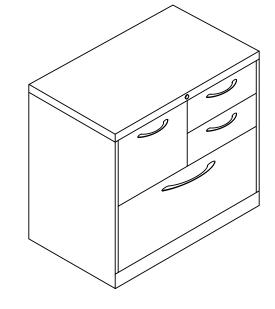

GSA Reference Page

Core Removable Locks

Core removable lock feature allows key numbers to be easily changed in the field. It also facilitates installation.

Omit Lock Core

Files can be shipped with lock cores removed; cores can then be installed after files are placed. Personal files and lateral files can be keyed alike with pedestals and overhead cabinets.

Four Pull Styles

Choice of four pull styles, also available on pedestals and laterals, allows for total design coordination on projects.

Four Hex-head Leveling Glides

Leveling glides can be adjusted from outside or inside the case. Because of the hex-head design of the stem; leveling can be done even when the personal file is fully loaded. Range is 1"

Suspension

Telescoping ball-bearing slides.

Essentials Personal Towers

Locking

One lock secures all drawers and separate locks on each door.

File and Box Drawers

File and box drawers contain single-side locking.


Open Shelves provide visibility for personal items and easy access to binders or resource books. Two adjustable shelves on 65"H and one adjustable shelf on 50"H.


European Hinges

Wardrobe and cabinet door both contain European-style hinged door.

Full Front Drawer Design

Door/drawer fronts are square and extend fully across the case. Base plate is recessed.

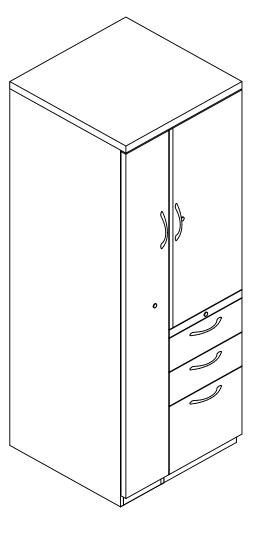

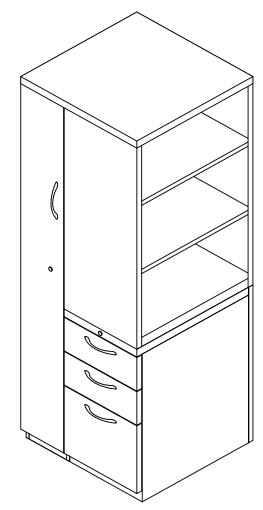

90 | Allsteel

GSA Reference Page

Essentials Personal Files, Personal Towers, and Flush Front Kick Plates

Essentials Personal Files (page 98)

- Matches inset drawer design of Essentials 28"H laterals.
- Worksurface supporting.
- Includes counterweights.
- Ball-bearing suspension on all drawers.
- Dimensions: 30"W x 18"D x 28"H.

Note: Essentials pedestals have a full front drawer design with a recessed base plate. Consider optional flush front kick plate for pedestals or towers if placed side-by-side with personal file.

Essentials Personal File with Shelf (page 98)

- Available with or without doors.
- Opening is 23¹/₄"H. It will accommodate one row of binders either above or below the shelf.
- Shelf is adjustable in 2" increments.
- Unit with doors is non-locking.

Essentials Personal File with Lateral Drawer (page 98)

- Available in two configurations: lateral drawer with open shelf and lateral drawer with file/box/box drawers.
- Lateral drawer is locking.
- One lock, located in the top, secures all drawers.
- Opening on units with shelf is 115/8". It will accommodate standard height binders.
- Box and file drawers can be reconfigured in the field for either right or left hand configuration.

Essentials Personal File with Door and Shelf (page 98)

- Available with either file/file or box/box/file drawers and one door with a shelf.
- Specify left or right for door location.
- Opening on door side is 23¹/₄"H. It will accommodate one row of binders either above or below the shelf.
- Shelf is adjustable in 2" increments.
- One lock, located in the top, secures all drawers.
- The door is non-locking.

Essentials Personal Towers (page 99)

- · Matches full front drawer design with recessed base plate of Essentials Pedestals.
- Store personal items such as briefcases, coats, gym bags, lunch
- Three keyed alike locks secure doors and drawers.
- Available in right- or left-hand configurations.
- Cabinet door on 50"H towers has one adjustable shelf.
- Cabinet door on 65"H has two adjustable shelves.
- 9"W wardrobe portion includes a coat rod.
- Ball-bearing suspension on all drawers.

Essentials Personal Towers with Side Shelves (page 99)

Personal Files & Towers Specification Information

- Matches full front drawer design with recessed base plate of Essentials pedestals.
- · Store personal items such as briefcases, coats, gym bags, and lunch coolers.
- Two keyed alike locks secure door and drawers.
- Available in right- or left-hand configurations.
- Wardrobe is 9"W.
- Open side shelf on 50"H tower has one adjustable shelf and one fixed shelf.
- Open side shelf on 65"H tower has two adjustable shelves and one fixed shelf.
- Wardrobe portion includes a coat rod.
- Ball-bearing suspension on all drawers.
- Tower to worksurface bracket mounts to user side of side access towers and is used to attach worksurface - order bracket separately.
- Flush front kick plates available order separately. The kick plates provide a flush appearance to coordinate with laterals and personal files for improved aesthetics.

Flush Front Kick Plate (page 99)

• Mounts to base of tower to provide a flush appearance to coordinate with laterals and personal files.

allsteeloffice.com | 91 Concensys - 1/2017

Working with Laterals

		GSA Reference Page
Features	Essentials Lateral Files	
Case Widths	30", 36", 42"	
Case Heights	2-High – 27 ¹ / ₄ " and 28"	
3	3-High – 391/8"	
	4-High – 52½"	
	5-High – 64 ¹ / ₄ "	
Case Depth	18"	
Pull Styles	I – Integral	
	B – Beveled	
	A – Arch	
	S – Square	
Lock Options:		
Lock	Standard	
Omit Lock Core	Optional	
Master Keyed Lock	Standard	
Removable Lock Core	Yes – With Special Key	
Dual-Side Locking	Yes	
Suspension	Heavy duty telescoping ball-bearing slide	
Drawer Interlock	Single	
Double Bottom	Yes	
Drawer Front	Single Wall	
Construction		
Receding Door	Single Wall	
Construction		
Hex-head Glide (for easy	Yes	
inside file leveling)		
Side Knockouts (for ganging)	Yes	
Counterweights	Standard (where needed)	
Posting Shelf	Optional	
Drawer Interiors:		
Drawers	11¼"	
Top Drawer	111/4" Roll-out shelf w/ receding door	
in 5-High	11/7 Roll out sitell w/ receding door	
Top Drawer	N/A	
in 6-High		
Front-to-Back Filing	Optional	
Filing Options	Letter, A4, and legal (side-to-side and front-to-back)	

Load Capacities (per current ANSI/BIFMA standards)

30" Wide	36" Wide	42" Wide	
86 lbs.	105 lbs.	124 lbs.	

Inside File Clearance Dimensions for Shelves and Drawers — Essentials Lateral Files

	12" [] -:		Width		Max.	
	12" Height	30"	36"	42"	Depth	
Roll-out Drawer	11¼"	271/8"	331/8"	391/8"	16½"	
Roll-out Shelf	10½"	271/8"	331/8"	391/8"	16½"	

ANSI/BIFMA **Standards**

Allsteel lateral files, incorporating the required counterweights in freestanding situations, meet or exceed the applicable ANSI/BIFMA Storage Unit Test Standards X5.9-2012.

Storage Specification Information

GSA Reference Page

Essentials Lateral Files, Combination Files, Storage Cabinets, Bookcases, and Accessories

Essentials Accessories (page 100)

- All accessories are gray.
- Model L919491 used for front-to-back filing of all paper sizes in all drawer sizes except — letter in a 42 "W case.
- Model L919492 for use in 42"W case for front-to-back filing of letter paper size

Essentials Combination Files (page 101)

- Combination cabinets match height of Essentials 5-drawer laterals and storage cabinets.
- Combination cabinets are 30"W or 36"W and available as open shelves or hinged doors.
- Shelves are adjustable in 2" increments and are 151/4"D.
- Available in four pull styles arch, square, integral, and beveled pull.
- 64¼" combination cabinet has one fixed shelf and two adjustable shelves.
- Cabinets are fully assembled.
- Drawers feature three-part, telescoping, steel ball-bearing
- Mechanical interlock inhibits opening more than one drawer
 at a time.
- For locking specifications, see pages 122-124.

Essentials Storage Cabinets (page 101)

- Storage cabinet matches height of Essentials laterals and combination files.
- All cabinets are 36"W and are available in two heights.
- Shelves are adjustable in 2" increments and are 151/4"D.
- Available in four pull styles arch, square, integral, and beveled pull.
- Storage cabinets have the following number of adjustable shelves:
- Cabinets are fully assembled.
- For locking specifications, see pages 122-124.

Essentials Overfiles (page 101)

- Cabinet shelf is adjustable in 1" increments up to 6" from center position.
- Cabinets are 18" deep (not for use on 18¾" deep full front files).
- Overfiles should be ganged to adjacent overfiles and/or anchored to lateral files, walls, or other rigid structures.
 Ganging knockouts and attaching bolts are provided for this purpose.

- Does not have leveling glides must be installed on flat, level surface such as lateral file top.
- Cabinet doors have a full-height integral pull, standard with lock.
- For locking specifications, see pages 122-124.

Essentials 18"D Bookcases (page 101)

- Essentials 18"D bookcases are same height as 3- and 5-drawer Essentials laterals and storage cabinets.
- Essentials 18"D bookcases are all 36"W and available with open shelves.
- Bookcase shelves are adjustable in 2" increments and are 15¼"D.
- 39\%"H unit has 2 adjustable shelves. 64\4"H unit has 4 adjustable shelves.
- Bookcases are fully assembled.
- Bookcases include leveling glides.

Essentials 12%"D Bookcases (page 101)

- Available in six heights from 29" to 81".
- All units case dimensions are 34½ "W x 125% "D.
- Inside shelf dimension depth is 121/8"D.
- Inside shelves adjust in ½" increments.
- Shelves are 3/4" thick.
- Meets or exceeds ANSI/BIFMA and ISTA performance standards.
- Bookcases do not include leveling glides.

Lateral File Tops — 18" or 36" Deep (page 102)

- Tops are 1¹/₄" thick.
- 60", 72" and 84" tops span two lateral files. Add "S2" suffix to add 1/8" to nominal width of top for freestanding applications.
- For use on 18" deep laterals, overfiles, bookcases, and cabinets.
- Tops are field installed.
- 36"D tops are to be used for lateral files placed back-to-back.
- These tops will work with: Align™ metal case open combination files, Align metal bookcases, Essentials laterals, Persona inset laterals, Persona custom laterals, Persona hoteling laterals.
- Recommended to complement: flat edge system worksurfaces.

For specification information see pages 88-89.

Support, Suspended, and Mobile Pedestals **Ball-Bearing Suspension**

\$ 688 \$ 750

GSA SIN 711-1, 711-2



Description Support Pedestals 28"H —	Model - File/File	Core Paint P1 List Price	Select Paint P2 List Price
18"D x 15"W*	PF198-182 ⊔	\$ 641	\$ 703
19%"D x 15"W	PF198-202 ⊔	\$ 641	\$ 703
22% "D x 15"W	PF198-232 ⊔	\$ 668	\$ 730
28%"D x 15"W	PF198-302 ⊔	\$ 688	\$ 750

NOTE: 28"H pedestals have a higher base plate resulting in a taller overall cabinet height. Consideration must be given to ensure that units align visually with each other and selected laterals.



Support Pedestals 28"H — Box/Box/File 18"D x 15"W* PF197-183 🗆 \$ 641 \$ 703 19% "D x 15 "W 703 PF197-203 🗆 641 \$ 730 227/8"D x 15"W \$ PF197-233 🗆 \$ 668

PF197-303 🗆



Suspended Pedestals 191/2"H - Box/File

287/8"D x 15"W

18"D x 15"W*	PH149-182 ⊔	\$ 535 \$	597
19% "D x 15 "W	PH149-202 ⊔	\$ 535 \$	597
227/8"D x 15"W	PH149-232 ⊔	\$ 559 \$	621



Mobile Pedestal 28"H — File/File

18"D x 15"W*	PM188-182 ⊔	\$ 668 \$	730
19% "D x 15"W	PM188-202 ⊔	\$ 668 \$	733
22% "D x 15"W	PM188-232 ⊔	\$ 692 \$	757
28% "D x 15"W	PM188-302 ⊔	\$ 714 \$	779



Mobile Pedestal 28"H — Box/Box/File

18"D x 15"W*	PM187-183 ⊔	\$ 668	\$ 730
19% "D x 15"W	PM187-203 ⊔	\$ 668	\$ 733
22 ⁷ / ₈ "D x 15"W	PM187-233 ⊔	\$ 692	\$ 757
28%"D x 15"W	PM187-303 ⊔	\$ 714	\$ 779

Note: 28"H pedestals have a higher base plate resulting in a taller overall cabinet height. Consideration must be given to ensure that units align visually with each other and selected laterals.



Mobile Pedestal 22½"H — Box/File

22% "D x 15"W	PM119-232 ⊔	-\$	568	\$	633
		_		-	

^{*18&}quot;D Pedestals do not accommodate legal size filing.


How to specify — Select the Model Number from above.	1st Option: Drawer Pull: A Arch B Beveled I Integral S Square	2nd Option: Paint: See inside front cover for finishes.	3rd Option: Pull Color: Arch Pull EL Matte Silver E4 Black Square Pull EL Matte Silver	4th Option: Lock Option: STD Standard OMT Omit Lock Core (Deduct \$18)
P 1 -	_].	P .		

Essentials Metal Storage

Basic Support and Mobile Pedestals

For specification information see pages 88-89.

GSA SIN 711-1



Description	Model	Core Paint P1 List Price	Select Paint P2 List Price
Support Pedestals 2	8"H — File/File		
19% "D x 15"W	AF398-202 ⊔	\$ 577	\$ 639
22% "D x 15 "W	AF398-232 ⊔	\$ 597	\$ 659

Support Pedestals 28"H — Box/Box/File

19% "D x 15 "W	AF397-203 ⊔	\$ 577	\$ 639
22% "D x 15"W	AF397-233 ⊔	\$ 597	\$ 659

Mobile Pedestal 28"H — File/File

19% "D x 15 "W	AM388-202 ⊔	\$ 588	\$ 653
22%"D x 15"W	AM388-232 ⊔	\$ 609	\$ 674

Mobile Pedestal 28"H — Box/Box/File

197/8"D x 15"W	AM387-203 ⊔	\$!	588 \$	653
22% "D x 15"W	AM387-233 ⊔	\$ (509 \$	674


Support Pedestals 28"H — File/File (partial top)

<u> </u>	4 17		
19% "D x 15"W	P281520FF ⊔	\$ 526	\$ 586
227/8"D x 15"W	P281523FF ⊔	\$ 545	\$ 605

Support Pedestals 28"H — Box/Box/File (partial top)

Support redestals 20 11	— BOX/BOX/Tile (partial top)		
19% "D x 15"W	P281520BBF ⊔	\$ 526	\$ 586
22%"D x 15"W	P281523BBF	\$ 545	\$ 605


Note: 28 "H pedestals have a higher base plate resulting in a taller overall cabinet height. Consideration must be given to ensure that units align visually with each other and selected laterals.

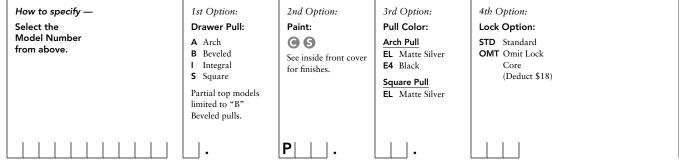

For specification information see pages 88-89.

GSA SIN 711-1, 711-2

Tops and Accessories



Description	Model		Core Paint P1 List Price		
Accessories					
Pencil Tray (Black only)	A2280-000	5	\$ 29	N/A	
Follower Block — 1-Pack	APFB80	5	\$ 29	N/A	
Box Drawer Divider — 2 Pack	PD80	5	\$ 25	N/A	
Hanging File Cross Rails — 2-Pack	AP519495	S	\$ 23	N/A	
(for side-to-side filing)					
Adjustable Glides — 4-Pack	AP20040AG	5	\$ 47	N/A	
Field-installable Hardware included					
Caster Package — Field Installable	AP1050CST	5	\$ 30	N/A	
Four Casters (2 swivel, 2 fixed)					
Counterweights for 221/2"H and 267/8"H Pedestals					
(do not specify color)	2282-300		\$ 147	N/A	
Counterweights for 28"H Pedestals					
(do not specify color)	2282-400		\$ 161	N/A	
Flush Front Kick Plate for 28"H Pedetals	ETKP28H		\$ 82	\$ 91	





Description	Model	L1 List Price	L2 List Price	L3 List Price
Laminate Tops – Flat Edge (for mok	oile and freestanding pedestals)			
19% "D x 15"W x 11/4" Thick	PT17-20TTP S	\$ 167	\$ 175	\$ 184
221/8"D x 15"W x 11/4" Thick	PT17-23TTP S	\$ 191	\$ 200	\$ 210
287/8"D x 15"W x 11/4" Thick	PT17-29TTP S	\$ 225	\$ 237	\$ 248





How to specify —

													List F	Pric	е										
Description	on	Gr	rade	G	rade	G	irade	G	irade	G	irade	G	rade	G	irade	G	rade	G	rade	G	irade	G	rade	G	irade
	Model		1		2		3		4		5		6		7		8		9		10		11		12
Seat Cush	Seat Cushion — For Metal Mobile Pedestals only (Specify seating fabric — no leathers)																								
23½"D	ASPT-24SC	\$	168	\$	208	\$	208	\$	220	\$	238	\$	254	\$	269	\$	286	\$	303	\$	303	\$	336	\$	367
29½"D	ASPT-30SC	\$	175	\$	205	\$	205	\$	214	\$	227	\$	239	\$	249	\$	262	\$	275	\$	275	\$	299	\$	322
23"D	YPPA2415SC	\$	168	\$	196	\$	213	\$	231	\$	251	\$	268	\$	287	\$	308	\$	324	\$	345	\$	391	\$	438
29"D	YPPA3015SC	\$	175	\$	205	\$	223	\$	242	\$	263	\$	280	\$	300	\$	322	\$	339	\$	361	\$	410	\$	459

Select the Model Number from above.
Add FC to end of seat cushion model for CTB133 / Boston Fire Code / NY/NJ Port Authority (\$100 extra)

Laminate (Tops only):
See inside front cover
for finishes.

1st Option:

Edge Color (Flat and T-Mold Edge only):
See inside front cover for finishes.

2nd Option:

Εl

3rd Option: Paint: **G G** Kick Plate only.

See inside front cover for finishes. Only Option for Seat Cushion: Upholstery:


Specify seating upholstery.

Example: PT17-20TTP.TM20.E4

For specification information see pages 90-91.

Personal Files
GSA SIN 711-3










EPF23018A

28"H Personal File with Lateral Drawer — 30"W x 18"D


Open Shelf / Lateral Drawer	EPF23018SLF □	\$ 1019	\$ 1098
File/Box/Box / Lateral Drawer	EPF23018FBBL □	\$ 1236	\$ 1315




28"H Personal File with Door and Shelf — $30"W \ge 18"D$

Box/Box/File Left / Door with Shelf Right	EPF23018BBFD □	\$ 1365	\$ 1444
Door with Shelf Left / Box/Box/File Right	EPF23018DBBF □	\$ 1365	\$ 1444
File/File Left / Door with Shelf Right	EPF23018FFD ⊔	\$ 1365	\$ 1444
Door with Shelf Left / File/File Right	EPF23018DFF □	\$ 1365	\$ 1444






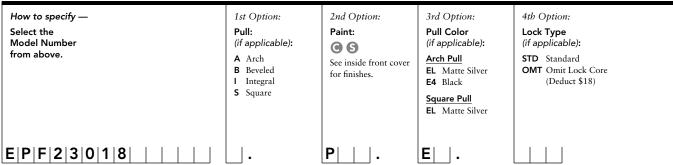

For specification information see pages 90-91.

GSA SIN 711-3

Towers and Accessories




Description	Model	Core Paint P1 List Price	Select Paint P2 List Price
50"H Personal Tower — 24"W x 24"D	– 4-High		
Wardrobe Left / File/File	ET42424LFF ⊔	\$ 1895	\$ 2084
Wardrobe Right / File/File	ET42424RFF ⊔	\$ 1895	\$ 2084
Wardrobe Left / Box/Box/File	ET42424LBBF ⊔	\$ 1895	\$ 2084
Wardrobe Right / Box/Box/File	ET42424RBBF ⊔	\$ 1895	\$ 2084

ET42424LFF



Wardrobe Left / File/File	ET52424LFF ⊔	\$ 2303	\$ 2492
Wardrobe Right / File/File	ET52424RFF 🗆	\$ 2303	\$ 2492
Wardrobe Left / Box/Box/File	ET52424LBBF 🗆	\$ 2303	\$ 2492
Wardrobe Right / Box/Box/File	ET52424RBBF □	\$ 2303	\$ 2492



50"H Personal Tower with Open Side Shelves — $24"W \times 24"D$ – 4-High

Wardrobe Left / File/File / Open Side Shelves	ET42424LOFF ⊔	\$ 1979	\$ 2170
Wardrobe Right / File/File / Open Side Shelves	ET42424ROFF 🗆	\$ 1979	\$ 2170
Wardrobe Left / Box/Box/File / Open Side Shelves	ET42424LOBBF 🗆	\$ 1979	\$ 2170
Wardrobe Right / Box/Box/File / Open Side Shelves	ET42424ROBBF □	\$ 1979	\$ 2170

ET42424LOBBF



65"H Personal Tower with Open Side Shelves — 24"W x 24"D — 5-High

Wardrobe Left / File/File / Open Side Shelves	ET52424LOFF 🗆	\$ 2428	\$ 2619
Wardrobe Right / File/File / Open Side Shelves	ET52424ROFF ⊔	\$ 2428	\$ 2619
Wardrobe Left / Box/Box/File / Open Side Shelves	ET52424LOBBF	\$ 2428	\$ 2619
Wardrobe Right / Box/Box/File / Open Side Shelves	ET52424ROBBF □	\$ 2428	\$ 2619




ETKP24WR

ETKP24WL

Tower to Worksurface Bracket

Tower Bracket for 24"D	ETB2W1	\$ 68	\$ 83
Flush Front Kick Plate for 24"W Towers			

ETKP24WL For Wardrobe Left Models \$ 120 \$ 132 For Wardrobe Right Models ETKP24WR \$ 120 \$ 132

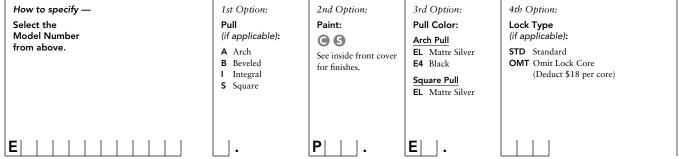

For specification information see pages 92-94.

GSA SIN 711-3

Storage Cabinets, Combination Files, Bookcases



Description	Model	Number of Adj. Shelves	Core Paint P1 List Price	Select Paint P2 List Price
64¼"H Combination	on Files w/Open Shelve	s — 18"D – 5-High		
30"W	ECF530N □	2	\$ 1494	\$ 1678
36"W	ECF536N □	2	\$ 1695	\$ 1879

64¼"H Combination Files w/Hinged Doors — 18"D – 5-High

30"W	ECF530H ⊔	2	\$ 1632	\$ 1816
36"W	ECF536H ⊔	2	\$ 1854	\$ 2038



Storage Cabine	ts — 36"W x 18"D			
391/8"H	ESC336 ∟	2	\$ 849	\$ 962
64¼"H	ESC536 ∟	4	\$ 1242	\$ 1426



Overfile Cabinets — 27% "H, cabinet with sliding doors and lock; one adjustable shelf

30"W x 18"D	EOF3018	\$ 859	\$ 953
36"W x 18"D	EOF3618	\$ 908	\$ 1002
42"W x 18"D	EOF4218	\$ 948	\$ 1042




Bookcases — 36"W	x 18"D			
36"W x 391/8"H	EBC336	2	\$ 734	\$ 847
36"W x 641/4"H	EBC536	4	\$ 1086	\$ 1270



Bookcases — $34\frac{1}{2}$ "W x $12\frac{5}{8}$ "D 29"H EBC30 530 \$ 609 \$ 41"H EBC42 2 752 \$ 639 \$ 59"H EBC60 3 813 \$ 963 \$ 71"H EBC72 4 \$ 849 \$ 1033 81"H EBC82 4 \$ 880 \$ 1099

Shelves — ¾" Thick				
Package of one	ESH34	N/A	\$ 67	\$ 80

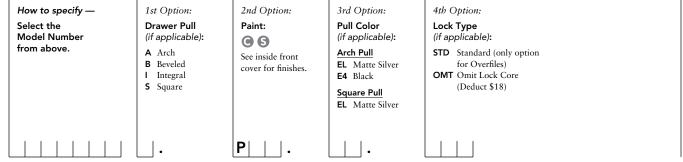


Storage

For specification information see page 94.

GSA SIN 711-1

Laminate Storage Tops




		Surface Type			Lar	ninate		
Width	Model	(L –Laminate, W –Wood)	Lis	L1 st Price		L2 t Price	Lis	L3 t Price
18"D Lat	teral File Tops for Es	ssential Lateral Files, Bookcases, and Cabinets						
30"W	AFNLFTP-3018	L or W	\$	255	\$	268	\$	282
36"W	AFNLFTP-3618	L or W	\$	287	\$	301	\$	317
42"W	AFNLFTP-4218	L or W	\$	313	\$	329	\$	346
60"W	AFNLFTP-6018	L or W	\$	358	\$	377	\$	394
66"W	AFNLFTP-6618	LS2 or WS2	\$	370	\$	387	\$	405
72"W	AFNLFTP-7218	L or W	\$	389	\$	410	\$	428
84"W	AFNLFTP-8418	L or W	\$	511	\$	538	\$	562

36"D Lat	teral File Tops for Es	sential Lateral Files, Bookcases, and Cabinets			
30"W	AFNLFTP-3036	L or W	\$ 444	\$ 468	\$ 488
36"W	AFNLFTP-3636	L or W	\$ 503	\$ 530	\$ 552
42"W	AFNLFTP-4236	L or W	\$ 544	\$ 573	\$ 598
60"W	AFNLFTP-6036	L or W	\$ 627	\$ 660	\$ 688
66"W	AFNLFTP-6636	LS2 or WS2	\$ 639	\$ 666	\$ 693
72"W	AFNLFTP-7236	L or W	\$ 676	\$ 711	\$ 741
84"W	AFNLFTP-8436	L or W	\$ 889	\$ 933	\$ 977

Particle board construction with laminate and flat edge trim on all sides.

Note: Add Suffix "S2" to 60"W - 84"W model numbers to add 1/8" to nominal width of top to span 2 storage units – no upcharge.

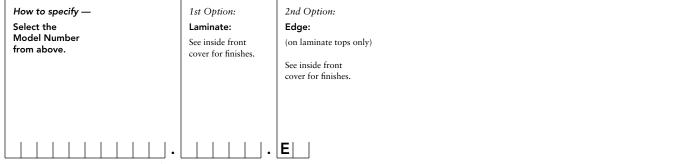

Concensys – 1/2017 allsteeloffice.com | 103

Cubby Storage

For specification information see page 94.

GSA SIN 711-1

Cubby Laminate Storage

Cubby Storage

Storage

- Cubby storage units are 40"W x 13"H x 11¾"D (outside dimensions).
- Cubby units include three equal-sized compartments with interior dimensions of 12½"W x 12"H x 11"D and include one shelf to separate one compartment into two — a 5\%"H upper compartment and 55%" lower compartment.
- Shelf can be located in any of the 3 openings.
- Specify optional shelf ASCSHELF for additional separation of cubby compartments.
- Cubby storage units are for mounting under worksurfaces 42"W or larger.
- Units include attaching hardware.
- Mounts under a 12"D or 24"D properly supported worksurface.
- Cubby units are constructed of 3/4" thick particle board core with surfaces finished in laminate.
- Laminate option is limited to LM14 Frosty White.
- Cubby storage ships flat for field assembly.



Description	Model	List Price
Laminate Cubby Storage		
40"W x 13"H x 11¾"D	ASC42 S	\$ 712

\wedge	Cubby 9
	Cubby I
*	

Cubby Shelves		
Cubby Laminate Shelf 2-Pack	ASCSHELE C	\$ 130



Extensions[™]

EXTENSIONS

Introduction	
Overview	105
Organization Tools	
Working with Organization Tools	106-108
Tool Rails	109
Work Tools	110
Marker Boards, Technology Modules, and Drawers	111
Ergonomic Accessories	
Working with Ergonomic Accessories	112-115
Keyboard Supports, CPU Hammock,	
Corner Sleeve, and Footrest	116
Monitor Arms and Tablet Holders	117
Illumination	
Working with Illumination	118-119
Task Lights	120
Undercabinet LED Lights, Link™ LED Lights,	
and Wand™ LED Light	121

Extensions — Introduction

Extensions accessory line by Allsteel is designed to help you create your own space.

• Create a unique space

Each person is unique, no one person works exactly like another, and different tasks require different tools. Extensions work tools allow each person the ability to create a unique environment that is all their own. Lots of paper to manage? Need active files within arm's reach? Want to maximize your worksurface space? Need light somewhere other than below a cabinet? Whatever the task, we have the tools to accommodate your workstyle.

• Create a comfortable space

With a full line of organization, ergonomic, and illumination tools, Extensions allow you to create a comfortable, ergonomic work area. Organization tools keep important items visible and within your reach. Ergonomic tools help you stay comfortable while working. Illumination tools allow you to put your light where it suits you.

• Create an organized space

Tired of all the piles of paper building up on your worksurface? Organization tools house your materials and keep them in an orderly fashion. With a combination of hanging or freestanding organizational accessories, Extensions let you manage everything from binders to paper clips.

· Organization tools

Work tools are a durable metal construction. Extensions allow you to manage your workspace smartly with tools like the phone caddy to elevate the phone off the worksurface, landscaped mail box trays to minimize worksurface intrusion, folder holders and tool box pencil and CD holders that hang off the slat rail and each other.

Increase your efficiency with organization!

• Ergonomic tools

Ergonomics is more than just comfort, it's flexibility and safety. The adjustable keyboard options allow users to maintain and vary comfortable wrist and arm positions throughout the day, whether typing or mousing. Monitor Arms offer versatile adjustability while providing optimum comfort for the eyes, neck, and shoulders.

• Illumination tools

Sleek and flexible, our lighting components offer you several choices. Recessed task lights conserve space and feature electronic ballast for longer bulb life and cooler operating temperature. LED tasklights' slim design blends in with its surrounding while utilizing energy-efficient LED technology. The Link light offers award-winning style to a highly versatile and energy efficient light.

Concensys – 1/2017 allsteeloffice.com | 105

Extensions[™]

Working with Organization Tools

GSA Reference Page

Allsteel's tool rail works in conjunction with a variety of accessories. Modular accessories free up worksurface space and provide orderly storage that is well within reach. Units can be arranged and rearranged to respond to changing workflow. The work tools that attach to the tool

Mail Box

rail are:

- Folder Holder
- Phone Caddy
- Binder Bin
- Tool Box


- Clip Caddy[™]
- Sidebar™ Personal Shelf
- Paper WaveTh
- Gripper Clip

Additional accessories that work with the tool rail work tools aesthetically are:

• Bookends

• Freestanding Mail Box

Coat hooks, marker boards and center drawers round out the



Tool rail, shown above, is height-adjustable in 1" increments using slots in panels or metal hutch. Tool rail shown with two tool boxes, two mail boxes, folder holder, and phone caddy. Folder holders and binder bins extend below a tool rail. Paper Wave and contents extend above a tool rail.

Tool Rails and Work Tools (page 109)

- Sturdy aluminum extrusion with steel support construction.
- Powder coated for durable finish.
- Use to hang Extensions tools. Cannot be used to support monitor
- Suggested weight capacity not to exceed 80 lbs.
- Consideration needs to be given to height of tools and location of worksurfaces.
- For use with Stride®, Terrace®, Concensys®, and Optimize™ systems.
- 5" high rail (widths coordinate with panels).
- Attachment via vertical reveals.
- Can be hung from wall track. Good solution for above copiers.
- Systems tool rail is off-modular can be used on a panel of equal width or one size smaller.
- May span two panels of appropriate size, i.e., 60"W Tool Rail on two 30"W panels.

Tool Rail for Hutches (page 109)

- Will work on Universal, Terrace, Optimize, and Concensys system hutches produced after July 2, 2000 and Align™ metal hutches.
- Sturdy aluminum extrusion with steel support construction.
- Powder coated for durable finish.
- Use to hang Extensions tools. Cannot be used to support monitor
- Suggested weight capacity not to exceed 80 lbs.
- Consideration needs to be given to height of tools and location of worksurfaces.

Mail Box (page 110)

- Holds standard letter-size paper and inter-office envelopes.
- Minimal horizontal intrusion.

Folder Holder (page 110)

- · Holds manila envelopes.
- Is capable of hanging on other folder holders to maximize space.
- · Stores vertically for easy access to files.

Phone Caddy (page 110)


- · Holds telephone at optimum ergonomic angle.
- Wire management cut-outs.
- · Accommodates standard phone sizes.

Binder Bin (page 110)

· Holds folders, binders, and manuals.

Tool Box (page 110)

· Holds pencils and other writing utensils, large post-it notes, and other desk top accessories.



· Holds paper clips and other small objects.

Sidebar™ Personal Shelf (page 110)


Holds office supplies and personal effects.

Paper Wave[™] (page 110)

- Provides 3 fully divided slots for organizing files.
- Keeps papers from "bowing" at bottom.











- Binds project papers together.
- Mounts to tool rail or tool tile.

Bookends (page 110)

- Can be used on shelves or in cabinets.
- Used to hold books, binders, and catalogs upright.

Freestanding Mail Box (page 110)

- Incorporates similar aesthetic to mounted Mail Box.
- Mounting brackets allow for free access from front and back.
- Sold in pairs of two; will stack up to eight high.
- Individual mail box dimension = $1\frac{3}{4}$ "H.
- · Stacking brackets are black.

Coat Hook APMC6 (page 110)

- Hangs directly into slotted Stride®, Terrace®, Optimize™, or Concensys® panel frame.
- Use for coat or bag.
- · Package of six.
- Available in black only.

Power/Data Modules — Clamp On Worksurface (page 111)

- On-surface mounting option, fits on any worksurface with a 4" overhang.
- 6' Power cord. UL Listed.
- Includes adapters to allow use of commercially available data terminals or blanks to fill unused openings. Many of the AMP, AT&T, Krone, Leviton and most commercial data terminals can be used.

Power/Data Modules — Clamp On Worksurface (page 111)

- Worksurface clamp can be used on any surface with a 2½" overhang.
- Must be installed at time of initial worksurface installation if installing between a worksurface and panel.
- 6' Power cord. UL Listed.
- The USB hub allows simultaneous powering of 2 USB-A devices. The USB hub is a charger only, no ability to connect to a PC. The charging capacity is limited and may not charge all devices.



Power/Data Modules — Under Worksurface (page 111)

- Under surface mounting can be used on any surface with a 5" clearance.
- 6' Power cord. UL Listed.

Technology Modules (page 111)

- Can be mounted by clamping to worksurface or mounting flush to the worksurface top.
- Must be installed at time of initial worksurface installation if mounting between a worksurface and panel.
- The USB hub allows simultaneous powering of four USB-A devices. The USB hub is a charger only, no ability to connect to a PC. The charging capability is limited and may not charge all devices.
- Opening size needed to flush mount in worksurface.



Model	Depth of Cut	Width of Cut
A87P2U1R	4"	8"

Byrne's Docking Station for iPod® and iPhone® (page 111)

- The iDoc charges and syncs with patent pending Roc.in.Doc[™] technology eliminating the need for charging adapters.
- The mount provides quick access to the iPod or iPhone display for easy user control.
- Contact Byrne to check for compatibility with the latest technology.



Worksurface Power/Data Module (page 111)

- Provides easy access to technology at primary worksurface.
- Mounts to edge of a worksurface and requires 3/8" gap. Consider whether 3/8" gap will work with layout.
- Must be mounted at time of initial worksurface installation if mounting between a worksurface and a panel. Maintaining 3/8" gap may not be possible with worksurfaces that are panel wrapped.

ORGANIZATION

Extensions™

Working with Organization Tools

GSA Reference Page


Marker Board (page 111)

- · For use with dry marking pens.
- Hangs directly on Optimize™ or Concensys® panel frame.
- Brackets are installed for Concensys applications.
- Brackets must be field re-located for use with other systems.
- Porcelain-coated steel surface.
- White with silver trim.
- Width must correspond with width of panel.



Metal Center Drawers (page 111)

- All metal center drawers feature pencil trays with three compartments for storage.
- Center drawers will not fit in center of 24"D worksurfaces which are wider than 60" due to location of center support bracket.
- For locking specifications, see pages 122-124.
- Ball-bearing slide suspension.




Laptop Drawer — U7WDA (page 111)

- Drawer body made of sheet metal.
- Drawer front made of ¾" particle board with high pressure laminate on both sides and fused laser edge banding.
- Core removable lock is located on right side drawer front
- 175/8"W x 18"D x 33/8"H Outside (interior 13"W x 16"D x 17/8"H)
- Minimum surface depth is 21" for surfaces not using an external stiffener; and 27" for surfaces using an external stiffener.
- Drawer extends 16"
- Maximum load: 45 lbs (functional BIFMA load)
- Drawer assembly and cover have cut out in back to allow for cables to exit drawer.
- Distance from floor to bottom of unit w/glides fully retracted is 24¾".
- Does not interfere with Further leg mounting plates so drawer can be placed directly next to either a system or table leg.
- When being placed next tower storage using the tower ell bracket (Z6LB) to support surface the drawer must be inset 3" to clear the ell bracket
- Can be placed directly next to any support storage from any Allsteel product line (excluding towers).
- Flat brackets drawer must be offset 3" from seam between surfaces to clear the bracket. See illustration at left.
- Can be used with rabbet edge worksurface models but there will be a larger reveal between surface and drawer.
- Can be used with knife edge worksurface models but reveal and depth need to be considered.

Flat Brackets

Front View

Top View

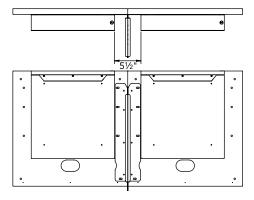

108 | Allsteel

Extensions[™]

For specification information see pages 106-107.

GSA SIN 711-1


Organization Tool Rails



Description	Model		e Paint st Price	ct Paint st Price
5"H Tool Rails — for Panels				
24"W	EASR24	S	\$ 153	\$ 183
30"W	EASR30	<u>S</u>	\$ 162	\$ 192
36"W	EASR36	<u>S</u>	\$ 171	\$ 201
42"W	EASR42	S	\$ 178	\$ 208
48"W	EASR48	<u>S</u>	\$ 182	\$ 212
60"W	EASR60	<u>S</u>	\$ 214	\$ 244



36"W	EAHSR36 S	\$ 171 \$	200
42"W	EAHSR42 S	\$ 178 \$	207
48"W	EAHSR48 S	\$ 182 \$	211
60"W	EAHSR60 S	\$ 214 \$	243
66"W	EAHSR66 S	\$ 222 \$	251
72"W	EAHSR72 5	\$ 237 \$	266

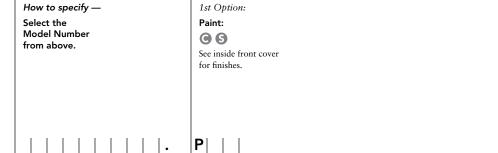

Organization Work Tools

For specification information see pages 106-107.

GSA SIN 711-1

2	7
	,
_	
_	














Description	Model			e Paint ist Price		ct Paint st Price
Mail Box						
9"D x 15"W	EAPT	5	\$	77	\$	91
Folder Holder						
9"H x 12"W	EAFS	<u>s</u>	\$	79	\$	93
Phone Caddy						
9"W x 11"D	EATS	5	\$	96	\$	110
Diadea Bio						
Binder Bin 8½"H x 5¼"W x 10"D	EABS	C	\$	77	\$	91
0/2 11 A 3/4 W A 10 D	LADS		.		پ	71
Tool Box						
5"H x 5½"W x 1½"D	EADH	<u>S</u>	\$	62	\$	76
Clip Caddy™						
2"H x 7"W x 3½"D	EAAC	5	\$	56	\$	70
Sidebar™ Personal Shelf						
2"H x 21"W x 7"D	EAPS	S	\$	79	\$	93
Paper Wave™						
Tray size: 2½"H x 6"W x 10"D						
Dividers: 9½"H x 9"W	EASS	<u>s</u>	\$	109	\$	123
Gripper Clip						
Package of 2 — 5"W x 2"H	EAPC	<u>S</u>	\$	79	\$	93
			<u> </u>			
Bookends (specify paint color)						
Pair — 8"H x 6"W x 4"D	EABE	5	\$	74	\$	88
Freestanding Mail Box (specify paint cold				457		474
Pair — 47/8"H x 133/4"W x 9"D	EAFT	5	\$	157	\$	171
Coat Hooks (black only)						

APMC6 S



Package of six

Examples: EAPT.P4J EABE.P4J APMC6.P

N/A


N/A

Extensions™


TENSIONS Organization — Marker Boards / Technology Modules / Drawers

For specification information see pages 107-108.

GSA SIN 711-1, 711-2, 711-11



Description	Model	List Price
Marker Board		
36"W x 24"H	AMRK36 S	\$ 442
42"W x 24"H	AMRK42 5	\$ 481
48"W x 24"H	AMRK48 5	\$ 497



Description	Model	Price
Power/Data Modules — Worksurface Clamp		
Dome — 2 Power, 2 Open Data with faceplate adaptors (FOG Fog only)	ACOMDOME2	\$ 291
2 Power, 2 USB (SNW Snow or STRM Storm)	APWRMOD2WC	\$ 400
3 Power (SNW Snow or STRM Storm)	APWRMOD3WC	\$ 310

Power/Data Modules — Under Worksurface Mount

2 Power, 2 USB (SNW Snow or STRM Storm)	APWRMOD2UWM	\$ 400
3 Power (SNW Snow or STRM Storm)	APWRMOD3UWM	\$ 310



Technology Modules — Worksurface Clamp (EL Silver only)

2 Power, 1 USB Hub	A87P2U1C S	\$ 605
2 Power, 1 iPod Hub	A87P2D1C S	\$ 740
2 Power, 1 USB, and 1 iPod Hub	A87P2U1D1C S	\$ 902



Technology Modules — Flush Mount (EL Silver only)

2 Power, 1 USB Hub	A87P2U1R S	\$ 645



Worksurface Power/Data Module (PR6 Silver only)

2 Simplex receptacles, 1 data position	A870302	\$ 227
--	---------	--------



			List Price	
Description	Model	P1 Core	P2 Select	P3 Accent
Metal Center Drawer w/Lock				
19"W x 14¾"D x 3"H	CSDC19 S	\$ 176	\$ 192	N/A

CSDC25 S

- 12" drawer extension (3/4).
- Inside drawer dimension: 19"W x 13"D x 2\%"H.
- Minimum clearance for mounting: 21¾"W x 19¼"D.



- 24¾"W x 14¾"D x 3"H
- 12" drawer extension (3/4).
 Inside drawer dimension: 24½"W x 13½"D x 2¾"H.
- Minimum clearance for mounting: 273/8"W x 191/4"D.
- Angled front

Laptop Drawer — Locking, laminate front, metal case



- 16" drawer extension
- Inside drawer dimensions: 13 "W x 16 "D x 1% "H
- Minimum clearance for mounting: 175/8"W x 21"D x 33/8"H (see illustration)

How to specify —	1st Option:	2nd Option:	3rd Option:	4th Option:	5th Option:	6th Option:
Select the Model Number from above.	Laminate (Laptop drawer front if applicable): See inside front	Edge (Laptop drawer edge if applicable): See inside front	Paint (If laptop drawer, list exterior case color here):	Paint (Interior of laptop drawer if applicable):	Lock (if applicable): STD Standard OMT Omit	Lock or Tech Module Color (if applicable): EL Silver (Lock)
	cover for finishes.	cover for finishes.	See inside front cover for finishes. Power Data Module PR6 Silver.	See inside front cover for finishes.	(Deduct \$18)	EL SIIVEI (LOCK)

 $\underline{\textbf{Extensions}^{^{\text{TM}}}}$

Working with Ergonomic Accessories

GSA Reference Page

Features	oorts Model AKM5	Model AKM3	Cobra™ Model AKMX	Model AKM1
reatures	Model AKMS	Model AKW3	Cobra Wodel AKWX	Model AKWI
Keyboard Support	Platform style 18¾"W x 11½"D	Platform style 18¾"W x 11½"D	Platform Style 19"Wx11"D	Platform style 25"W x 10½"D
Keyboard Support Material	Phenolic	Phenolic	Phenolic	Polyethylene Made of 90% post-consumer materials and completely recyclable. Free of formaldehydes and carcinogene and emit no VOCs.
Suspension	Nylon glides on lubricated slide track Intuitive lift and lock one touch height adjustment Visual height indicator gauge	Nylon glides on lubricated slide track Intuitive lift and lock one touch height adjustment	Lubricated slide track system: spring assisted	Nylon glides on lubricated slide track system — spring assisted
Platform Rotation	360 degrees	360 degrees	360 degrees	360 degrees
Platform Tilt	+10/-15 degrees	+/- 15 degrees	+10/-20 degrees	+10/-15 degrees
Platform Tilt Adjustment	Soft touch knob for precise tilt adjustment; visual indicator gauge	Release handle for independent tilt adjustment	Convenient tilt wheel assists desired tilt angle	Soft touch knob for simultaneous height and tilt adjustment
Platform Height Adjustment Range	8%" (1%" above to 6%" below)	7" (2½" above to 4½" below) Can position platform to be flush with worksurface for extended work area	12½" (7" above to 5½" below)	6¼" (1¼" above to 5" below)
Platform Height Adjustment	Lift platform to raise, lift slightly and tilt back to lower	Lift platform to raise, lift slightly and tilt back to lower	Lift platform to raise, lift slightly and tilt back to lower	Turn knob to release platform adjust to desired height and til tighten knob to secure
Palm Rest	Detachable leatherette-covered gel palm rest	Detachable leatherette-covered gel palm rest	Fabric covered gel palm rest	Detachable leatherette-covered gel palm rest
Mouse Pad	Independent tilt and swivel with reversible design; mouse platform clicks in on left or right side, no tools required	Independent tilt and swivel with reversible design; mouse platform clicks in on left or right side, no tools required	Circular, swivel, tilt, LH/RH mounting, mouse catcher, gel rest	In-line to accommodate mouse on same level as keyboard
Microsoft Natural Compatible	No	No	Yes — by removing palm rest	Yes — by removing palm rest
Track Depth	21¾"	21"	23"	17"
Required Mounting Clearance	18¾" W x 21¾"D + ¼" Recess	183/4"W x 21"D + 1/4" Recess	19"W x 23"D + 1/4" Recess	25"W x 17"D + 1/4" Recess
Adjustable Wrist Rest	No	No	Fixed mounting and height	No
Ideal For	Straight worksurfaces ADA/HFES compliance Extensive adjustability with mouse in line, mouse over or mouse forward of keyboard	Multiple users Straight worksurfaces Extensive adjustability with mouse in line, mouse over or mouse forward of keyboard	Corner worksurface applications Sit to stand applications	Shallow worksurfaces Stride Beam-Based Benching Corner worksurface (17" or 21") Radius worksurface (42" or 48")
Additional Information	Leatherette-covered palm rests are free of formaldehydes and carcinogens. Can be cleaned and sanitized. Entire palmrest can be removed for thorough cleaning of the platform Track can be cut in the field to shorten track depth — may affect ability to fully recess platform	Leatherette-covered palm rests are free of formaldehydes and carcinogens. Can be cleaned and sanitized. Entire palmrest can be removed for thorough cleaning of the platform Installer friendly — ship standard with double-sided tape to assist with installation Track can be cut in the field to shorten track depth — may affect ability to fully recess	Track can be cut in the field to shorten track depth — may affect ability to fully recess platform	Leatherette-covered palm res are free of formaldehydes an carcinogens. Can be cleaned and sanitized. Entire palmres can be removed for thorough cleaning of the platform Installer friendly — ship standard with double-sided tape to assist with installatio Track can be cut in the field to shorten track depth — ma affect ability to fully recess

Working with Ergonomic Accessories

AKM5 Keyboard Support w/Switch-n-Click Mousepad (page 116)

- Convenient lift and lock mechanism provides 83/8" of height adjustment and offers more precise placement accommodated with visual dial-a-tilt height and tilt gauge.
- +10°/-15° tilt adjustment and 360° rotation provides support of neutral position of shoulders, arms, and wrists while accommodating multiple working postures.
- Slim, low-profile design.
- Pairs with a convertible keyboard platform that can be positioned in-line, over, or forward of keyboard platform — without the need for tools.
- Includes detachable leatherette-covered gel palm rest, nonslip pad, mouse pad, mouse guard, and cord management clips.
- Phenolic material on keyboard platform can be cleaned and sanitized to maintain a bacteria-free environment; articulating arm made of cold-rolled steel is recyclable.
- Recommended for straight-edge worksurfaces.

AKM3 Keyboard Support w/Switch-n-Click Mousepad (page 116)

- Features intuitive lift and lock height and tilt mechanism. Provides 7" of height adjustment.
- Slim, low-profile design that can be positioned flush with the worksurface for an extended workspace.
- +15°/-15° tilt adjustment and 360° rotation provides support of neutral position of shoulders, arms, and wrists while accommodating multiple working postures.
- Pairs with a convertible keyboard platform that can be positioned in-line, over, or forward of keyboard platform — without the need
- Includes detachable leatherette-covered gel palm rest, nonslip pad, mouse pad, mouse guard, and cord management clips.
- Phenolic material on keyboard platform can be cleaned and sanitized to maintain a bacteria-free environment; articulating arm made of cold-rolled steel is recyclable.
- Recommended for straight-edge worksurfaces.

AKMX Cobra™ Keyboard Support w/Mousepad (page 116)

- Lift and lock intuitive height adjustment.
- Positive and negative tilt for the best ergonomic positioning.
- +10°/-20° tilt adjustment and 360° rotation provides support of neutral position of shoulders, arms, and wrists while accommodating multiple working postures.
- Non-handed mouse tray can be moved from right hand to left hand side.
- Surpasses ANSI/BIFMA standards.
- Black powder-coat finish.

AKM1 Keyboard Support w/Mousepad (page 116)

- Simple, spring-assisted mechanism provides 61/4" of height adjustment.
- Features soft-touch knob for simultaneous height and tilt adjustments.
- +10°/-15° tilt adjustment and 360° rotation provides support of neutral position of shoulders, arms, and wrists while accommodating multiple working postures.
- · Accommodates keyboard and mouse on the same level
- Includes detachable leatherette-covered gel palm rest, nonslip pad, mouse pad, mouse guard, and cord management clips.
- Keyboard platform made of 90% post-consumer recycled materials and completely recyclable. Free of formaldehydes and carcinogens and emits no VOCs.

Keyboard Spacer Kit (page 116)


Kit provides ten 21/8 "H spacers and hardware for mounting keyboard support beneath an external worksurface support channel.

CPU Hammock™ (page 116)

- Features 360° swivel with 13½" ball bearing glide track.
- Load capacity 55 lbs.
- Fits CPUs 5" to 20" in overall height and 3" to 6" in width.
- Height adjustable from 16" to 23" below worksurface.
- No tools required to make adjustments.
- Features a textured, silver paint finish.

Metal Corner Sleeves (page 116)

- 22½"W leading edge x 18"D.
- Corner sleeves connect intersecting worksurfaces to create "corner desk" work areas.
- · All corner sleeves have pre-drilled holes to allow attachment of articulating keyboard platforms.



Working with Ergonomic Accessories

GSA Reference Page

MONITOR ARMS	ZW8 for Tool Tile	ZW8 Single	ZW8 Dual	ZW8 Single-HD	ZW8 Dual-HD
Allsteel Model:	ZW810T	ZW810S	ZW820D	ZW810H	ZW820DH
Features:					
Monitor rotation	180°	180°	180°	180°	180°
Monitor Extension	15"	21"	21"	221/4"	26¾"
Monitor retraction	3½"	3½"	3½"	3½"	3½"
Monitor tilt adjustment	+30°/-25°	+30°/-25°	+30°/-25°	+85°/-25°	+35°/-25°
Arm Height adjustment	11¾"	6½" to 19½" (13")	6½" to 19½" (13")	9" to 23" (14")	9" to 23" (14")
Monitor Weight capacity (maximum approved weight)	6½ to 16 lbs.	6½ to 18 lbs.	6½ to 18 lbs. per arm	17½ to 44 lbs.	12 to 38.5 lbs. each
Mounting option	Stride rail mount*	Desk clamp or grommet included	Desk clamp or grommet included	Desk clamp or grommet included	Desk clamp or grommet included
360° lockout feature	No	Yes	Yes	No	No
VESA compatibility	75mm and 100mm	75mm and 100mm	75mm and 100mm	75mm and 100mm	75mm and 100mm
Laptop Tray compatible	Yes	Yes	Yes	No	No
Tool Tile / Stride Bench compatible	Yes	No	No	No	No
Pole height	N/A	N/A	N/A	N/A	N/A
Maximum width per monitor	N/A	N/A	25"**	25"	25"
Worksurface requirements — Desk Clamp	N/A	7/s" to 2" thick	7/s" to 2" thick	7/s" to 2" thick	7/s" to 2" thick
Worksurface requirements — Grommet Mount	N/A	%" to 2" thick; hole diameter 5/16" to 2"	7/6" to 2" thick; hole diameter 5/16" to 2"	7/6" to 2" thick; hole diameter 5/16" to 2"	%" to 2" thick; hole diameter 5/16" to 2"
Environmental info	99% Recycled content	99% Recycled content	99% Recycled content	99% Recycled content	99% Recycled content

^{*}ZW810T is NOT approved for Tool Rail Models EASRxx or EAHSRxx that attach to system panel slots or hutches.

^{**}Width of monitor can be extended with ZW8SM sliding mount.

ZW8 Series Monitor Arms (page 117)

- Versatile adjustability with a refined design and effortless, pneumatic fingertip adjustment.
- Multiple points of adjustment, including 360° swivel at two points, 21" extension and 13" of height adjustment, and a 180° lockout feature.
- Monitor tilts +30°/-25°.
- Tension adjustment feature at two locations to accommodate monitor weight and desired tilt tension.
- Maximize use of worksurface with ability to retract to minimal footprint of 3½", making ZW8 ideal for shallow worksurfaces.
- Model includes grommet and worksurface mounting options.
- Integrated cable management.
- Desk clamp mounts to surfaces \%" to 2" thick; grommet mount requires hole diameter of 5/16" to 2" wide, and accommodates surfaces up to 2" thick.
- Single arm supports 6½ to 18 lbs.; dual arm offers perfect horizontal alignment, and each arm supports 6½ to 18 lbs.
- ZW8 for tool tile is compatible on Allsteel tool tiles and Stride bench rail includes one dynamic extension limb. Arm extension is 15" from tile/rail, height adjustment 12".

(Not approved for tool rail models EASRxx or EAHSRxx that attach to system panel vertical slots or hutches.)

- ZW810S and ZW820D will fit all depths of Stride double-sided benches. Interference with support beam on 54" bench, desk clamp will not install flush to edge of worksurface, but will allow power access door to close completely.
- Mounting location on Stride single-sided bench and screen-based bench may be impacted by location of connecting brackets and supports.
- VESA 75mm and VESA 100mm compatible.
- Quick release feature simplifies monitor installation and exchanges.

ZW8SM Sliding Mount (page 117)

- Provides 9" of additional horizontal adjustability when attached to ZW810S or ZW820D above.
- Not compatible with Heavy Duty Series.
- $12\frac{1}{4}$ "W x $2\frac{3}{4}$ "H x $5\frac{1}{2}$ "D; 2 lbs.


ZW8 Heavy Duty Series (page 117)

- ZW810H heavy duty arm supports 7.6 to 44 lbs. in total weight.
- ZW820DH supports weight capacity 12 to 38.5 lbs. combined (to accommodate 5.5 lbs. weight of crossbar).
- Single arm features 221/4" extension, dual arm extends 263/4".
- Height adjustment range of 9" to 23" (14" total).
- Features 360° rotation at 3 points.
- Integrated cable management.
- Tension adjustment feature at two locations to accommodate monitor weight and desired tilt tension.
- Quick release feature simplifies monitor installation and exchanges.
- Monitor rotates 180° and tilts +85°/-35°.
- Dual arm crossbar length of 41"; monitors can be positioned by sliding along crossbar to accommodate various sizes. Can accommodate up to two 24" diagonal monitors (total outside casing dimension of 38" wide).
- Cannot be installed on 54" Stride double-sided bench due to interference with support beam.
- Mounting location on Stride single-sided bench and screen-based bench may be impacted by location of connecting brackets and supports.

GSA Reference Page

Laptop Tray (page 117)

- Adjustable laptop tray can be used on Z W810S and ZW820D.
- Features adjustable depth of 113/4" to 171/4" to accommodate docking stations along with laptop computer.
- Width 12".
- Designed with ventilation holes for adequate heat dissipation.
- · Non-skid protective pads included to prevent laptop from sliding.
- Weight of laptop tray 7 lbs; include when calculating total weight of tray + laptop to comply with weight capacity.



Ergonomics — Keyboard Supports / CPU Holder

For specification information

>

>

150-5	>
)
	•

Edge Details	

Model AWCS

				ist
Description	Model			rice
Precision Fit Articulating Keyboard Support with Switch	-n-Click Mousepad (Bla	nck only)		
18¼"W x 11½"D (Mounting clearance 21¼"D)	AKM5	5	\$	553
Convertible Articulating Keyboard Support with Switch-	n-Click Mousepad (Bla	ck only)		
18¾"W x 11½"D (Mounting clearance 21"D)	AKM3	S	\$	482
Cobra™ Keyboard and Mouse Support (Black only)				
19"W x 11"D (Mounting clearance 23"D)	AKMX	<u>S</u>	\$	434
		<u>s</u>	·	317
19"W x 11"D (Mounting clearance 23"D) Articulating Keyboard Support with Integrated Mousepond Support With Integrated Support With Integrated Mousepond Support With Integrated	ad (Black only)		·	
19"W x 11"D (Mounting clearance 23"D) Articulating Keyboard Support with Integrated Mousepa	ad (Black only)		·	
Articulating Keyboard Support with Integrated Mousep. 25"W x 10½"D (Mounting clearance 17"D) Keyboard Spacer Kit 10 – 2½"H Spacers and Hardware	ad (Black only) AKM1	S	\$	317
19"W x 11"D (Mounting clearance 23"D) Articulating Keyboard Support with Integrated Mouseport 10½ "D (Mounting clearance 17"D) Keyboard Spacer Kit	ad (Black only) AKM1	S	\$	317

AWCS



Metal Corner Sleeve — for use with Optimize™, Concensys®, Terrace®, and Stride® Systems

• Fits 11/4" thick square edge detail.


(T-Mold worksurfaces) 22½"W leading edge x 18"D.

89


For specification information see pages 114-115.


GSA SIN 711-1

Ergonomics — Monitor Arms





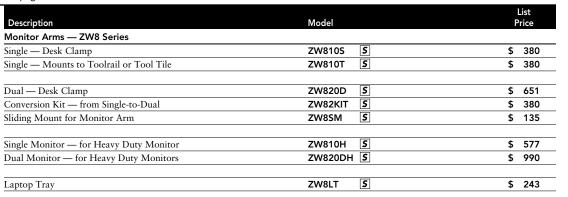




How to specify — 1st Option: Select the Color for ZW Series: Model Number **SVR** Silver from above. Z|W|8| SVR

Allsteel Extensions offers Illumination in four styles — Task Light, Undercabinet LED Light, Wand Light, and Link Light.

Task Light

Recessed task lights conserve space and provide an efficient solution for illuminating the

Extensions




workplace. All models are equipped with electronic ballast for longer bulb life and cooler operating temperature.

Recessed task light models mount under storage cabinets or shelves to provide optimal space utilization. Models are available in two styles and three sizes to correspond with the width of the cabinet or shelf. Task lights with a fused plug are available to meet Chicago electrical code.

Undercabinet LED Light

The Undercabinet LED Light is a low-profile, linear solution for overhead cabinets and shelves and is an ideal solution for painted wood storage. It



utilizes energy-efficient LED technology which provides a long life. The Undercabinet LED Light provides the opportunity to mount the fixture where light is needed most.

The Undercabinet LED Light features a metal trough reflector with diffuser lens. The light has a sleek ½" thick profile and provides two options for mounting, either magnetically or with hardware. Undercabinet LED Lights can be daisy-chained.

Optional undercabinet occupancy sensor is available which will automatically turn off the fixture after 30 minutes of no detection and back on immediately as the user re-enters the detection range using Passive Infrared (PR) sensor technology. Unit features 360° lens with 90° outward detection angle, providing a 36" coverage diameter at 18". Occupancy sensor comes with connector and is required to be connected in the sequence shown below. Connect occupancy sensor to a light, or first light in daisy chain to control all linked lights.

CONNECTION SEQUENCE*



*Cannot deviate from this sequence

Recessed Task Lights (page 120)

- Recessed task lights are black with a 9' long black cord that is attached to the right rear corner of the fixture. (Color does not need to be specified.)
- Bulbs are included.
- RECOMMENDATION: Provide a separate circuit for task lights to ensure proper, long-term operation.
- Includes 4 cord retainer clips.
- Shorter width models can be used on wider overheads, shelves and hutches.
- All models are equipped with electronic ballast for longer bulb life and cooler operating temperature.
- On/Off switch provides individual control of tasklight within the workstation.
- Daisy chain models require a master control model 10 fixtures maximum.

Undercabinet LED Lights (page 121)

- Low profile energy-efficient LED task light for use with overhead storage cabinets and shelves.
- 20W power supply for 10W 17" unit (.166 amps).
- 20W power supply for 20W 31" unit (.166 amps).
- 60W power supply for daisy-chain starter units (.5 amps). Must order one starter unit for each daisy-chain application.
- Specify up to 5 additional 17" interconnect units (ALED17UJMP30) to daisy-chain together with 17" daisy-chain starter fixture (ALED17U60).

Example: Daisy-chain 4–17" undercabinet LED lights: Specify: 1 ALED17U60

Specify: 3 ALED17UJMP30 with 10" jumper cord

- Specify up to 2 additional 31" interconnect units (ALED31UJMP30) with 10" jumper cords to daisy-chain together with 31" tasklight (ALED31U60); or 17" daisy-chain starter fixture (ALED17U60).
- 3500K color temperature.
- 131 footcandles at 18" on ALED31U; 76 footcandles at 18" on ALED17U.
- Magnetic or screw-mount option attachment hardware included.
- On 20 watt models, power drive is attached to plug: allow 1%"D space at outlet.
- On 60 watt models, power drive brick is in center of cord and can be attached to underside of worksurface with velcro mount.
- Includes 3 cord retainer clips.
- Meets California Title 24 Energy Efficiency Standards.
- "Instant On" switch with infinite dimming cycle from 100% to 15% with the last state memory, allowing the user to set their desired level of lighting.
- Fixture automatically turns off after 10 hours of use to reduce unwanted energy use.
- Optional occupancy sensor automatically turns off all interlinked fixtures after 30 minutes of no detection and back on immediately when detection is found.

GSA Reference Page

Link™ Light

Link's simple forms, slim profile, and expressive details make a surprising design statement in any workplace. The playful lamp head offers 180-degree movement for natural and precise adjustability. The concentrated array of high-power LEDs delivers a brighter light output than standard fluorescent lights, while operating cooler for consistent, long-lasting, and uniform-quality light. Plus, its efficient design elegantly conserves the amount of materials required, paring them down to their most essential. Engineered for effortless disassembly, Link is 97 percent recyclable.

Wand™ Task Light

Wand freestanding task light offers a clean, simple design along with powerful LED technology to illuminate the workspace.

The swivel base and arm tilt allow users to position the light just where they need it.

The 7.7 watt LED light offers efficiency and long life, providing up to 25 years of daily use. The slim, sleek design makes it easy to integrate into any workspace. Wand task light is 97% recyclable. Optional Occupancy Sensor available.

Link Light (page 121)

- Single- or dual-arm style.
- 3300K color temperature, 7.5 watts.
- Available in two soft-touch colors (Silver and Black).
- Mounting options include a freestanding base, worksurface edge clamp, or tool rail bracket. Each allows for unobstructed lamp rotation.
- Freestanding base is 9½" x 9½".
- Cord length: 9' with detachable power adapter.
- The lamp head forms the handle, offering 180-degree up/down movement.
- Low Profile worksurface clamp allows for minimal clearance conditions but must be installed before worksurface.
- Power is delivered through a conductive aluminum skin, eliminating internal wiring.
- L-shaped base sits in the corner, using minimal workspace.
- Meets California Title 24 Energy Efficiency Standards.
- Link Light is UL, CE, and RoHS compliant.
- Actual length of model LED18U is 19".
 Actual length of model LED36U is 37¼".

Wand LED Freestanding Task Light (page 121)

- Available in Silver or White. 9'4" cord is Silver.
- Full range dimming from 100% 10% with last state memory.
- More efficient than original Wand light with brighter and broader range of light.
- Uses 7.7 watts at highest setting and as low as 1 watt at its lowest setting, providing 85 to 12 footcandles of light, respectively (16" above worksurface).
- 7½" round swivel base and 16½"H tilt arm allow versatile positioning of the 13" lampshade.
- Designed for 50,000 hours of life, providing up to 25 years of daily use. Warranty 5 years (fixture); 3 years (power supply).
- Color Temperature: 3500K. Color Rendering Index (CRI): 80.
- Materials: aluminum arm and lampshade, steel base.
- Weight: 4.4 lbs. 97% recyclable, 76% post-consumer.
- Certifications: UL and CUL. TAA compliant.
- Occupancy sensor available with automatic shut-off after 6 minutes if no motion is detected.

For specification information see page 118.

Illumination — Task Lighting
Open Market / GSA SIN 711-1 (as noted)



Description	Usage	Model	Price
T5 Task Lights (Black only) — Use recessed u	ınder overhead ca	abinets, storage shelves, or hutches,	
comes with cord retainer clips			
Task Light for 24"W	10	A870824 S	\$ 243
Task Light for 30"W and 36"W	14	A870830 S	\$ 246
Task Light for 42"W and 48"W	21	A870842 S	\$ 265
Task Light for 60"W, 66"W, and 72"W	28	A870860 S	\$ 287

T5 Task Lights (Black only) — With fused plug (satisfies Chicago electrical code)

Task Light for 24"W	10	A870824CH S	\$ 314
Task Light for 30"W and 36"W	14	A870830CH 5	\$ 320
Task Light for 42"W and 48"W	21	A870842CH S	\$ 339
Task Light for 60"W, 66"W, and 72"W	28	A870860CH S	\$ 358

Note: See below for GSA Approved Task Lights.



T8 Energy Efficient Tri-Phosphor Task Lights — Use recessed under overhead cabinets, storage shelves, or hutches

Base Models — Stand Alone			
Task Light for 24"W	15	GS870924 S	\$ 314
Task Light for 30"W and 36"W	17	GS870930 S	\$ 325
Task Light for 42"W and 48"W	25	GS870948 S	\$ 348
Task Light for 60"W, 66"W, and 72"W	32	GS870960 S	\$ 372

Master Control Models with Power Unit for Dais	y Chain	(10 fixtures maximum)
--	---------	-----------------------

Master Task Light for 24"W	GS870924MCL 5	\$ 349
Master Task Light for 30"W and 36"W	GS870930MCL S	\$ 359
Master Task Light for 42"W and 48"W	GS870948MCL 5	\$ 385
Master Task Light for 60"W, 66"W, and 72"W	GS870960MCL S	\$ 406

Jumper Models with 42" Daisy Chain Jumper Cord (require a Master Control model)

Jumper Task Light for 24"W	GS870924D S	\$ 314
Jumper Task Light for 30"W and 36"W	GS870930D S	\$ 325
Jumper Task Light for 42 "W and 48 "W	GS870948D S	\$ 348
Jumper Task Light for 60"W, 66"W, and 72"W	GS870960D S	\$ 372

Note: All T5 and T8 task lights above are 4100 Kelvin.

Cord Retainer Clips (Black only)

Bag of 50 clips AAPACM2 S \$ 33		 y ,	
	Bag of 50 clips		\$ 33

GSA SIN 711-1



\$ 290

\$ 412

Extensions[™]

For specification information see pages 118-119.

Open Market / GSA SIN 711-1

Illumination — Task Lighting





. •	•	
Description	NEW! Model	List Price
LED Undercabinet Light (white end caps)		
17" Task Light w/20 watt power supply for 24"W or wider overhead	ALED17U S	\$ 595
17" Task Light w/60 watt power supply for daisy chain	ALED17U60 S	\$ 649
17" 10 watt Interconnect Task Light w/10" Jumper Cord	ALED17UJMP30 S	\$ 458
31" Task Light w/20 watt power supply 36"W or wider overhead	ALED31U S	\$ 890
31" Task Light w/60 watt power supply for daisy chain	ALED31U60 5	\$ 938
31" 20 watt Interconnect Task Light w/10" Jumper Cord	ALED31UJMP30 S	\$ 536
Undercabinet Occupancy Sensor 23/8"W + 1"W Connector	ALEDOCC*	\$ 363

^{*}Undercabinet Occupancy Sensor works with LED Undercabinet lights shipped after 11/1/2013.



GSA SIN 711-1

2	Link™ LED Light
	Link LED Lamp,
	Link LED Lamp,
	Link Freestanding
	Link Low Profile

Link LED Lamp, 18" Single Arm	LNKSA 5	\$ 454
Link LED Lamp, 13"/13" Dual Arm	LNKDA S (shown)	\$ 483
Link Freestanding Base	LNKFS S	\$ 120
Link Low Profile Worksurface Clamp	LNKCL 5	\$ 74
Link Tool Tile Attachment	LNKPM S	\$ 74

WANDFSOC 5

GSA SIN 711-1	

Wand™ LED Task Light (Silver or White)	
Freestanding LED Task Light w/base	WANDFS 5

Freestanding LED Task Light w/base and Occupancy Sensor

How to specify —	1st Option:	
Select the Model Number	Color (for Link Light):	
from above.	SVR Silver	
	(for Wand LED):	
	SVR Silver	
	WHT White	

Appendix

Locking Specifications
GSA Reference Page

Laterals, Pedestals and Storage, Painted Wood Storage

Standard Options

- Random Keying The factory will assign key(s) arbitrarily using key numbers from chart below.
- Omit Lock Core The factory will omit lock cores.
 Removable lock core kits with specific key number must be ordered to facilitate keying alike in the field.

Vertical Files

Standard Options

• Random Keying — The factory will assign key(s) arbitrarily (see below chart for key numbers).

Key Alike Process

- Order standard product which will be shipped with factory installed locks and random numbered cores.
- Order the appropriate quantity of like numbered cores required for each workstation or keyed area.
- Simply replace the factory installed core with the replacement cores after product has been installed.

Replacing Lock Cores


- Lock must be in the unlocked position.
- Insert core removal key and pull core straight out.
 (Reach units require rotating key 90° clockwise past unlocked position.)
- Insert new core with core removable key, hold core into lock and withdraw core removal key.
- Retain original core for future use.
- On Persona™ Pedestals, open top drawer and hold lock bars in unlocked position before removal of core.

	Random Keying	Omit Lock Core	Key Numbers	Lock Core Kit	Master Key
Align™ Hutches	X	X	101E-225E	ALKF23C*	AMKF22
Align Laterals	X	X	101E-225E	ALKF23C*	AMKF22
Align New Low Credenzas, Towers, Pedestals ("YP" prefix models)	X	X	101E-225E	ALKF26EL	AMKF22
Align Overheads	X	X	101E-225E	ALKF23C*	AMKF22
Align Pedestals (for New Pedestals see above)	X	X	101E-225E	ALKF23C*	AMKF22
Align Personal Tower and Files (for New Towers see above)	X	X	101E-225E	ALKF23C*	AMKF22
Align Storage/Combination Files	X	X	101E-225E	ALKF23C*	AMKF22
Center Drawer (CSDC19/25)	X	X	101E-225E	ALKF23C	AMKF22
Classic Laterals	X	X	101E-225E	ALKF23C	AMKF22
Essentials™ Hutches	X	X	101E-225E	ALKF23C	AMKF22
Essentials Laterals	X	X	101E-225E	ALKF23C	AMKF22
Essentials Pedestals	X	X	101E-225E	ALKF23C	AMKF22
Essentials Personal Tower and Files	X	X	101E-225E	ALKF23C	AMKF22
Overheads (Flipper Door, including New RTA)	X	X	101E-225E	ALKF23C	AMKF22
Overheads (Receding Door)	X	X	101E-225E	ALKF23C	AMKF22
Painted Wood Storage	X	X	101E-225E	ALKF23C	AMKF22
Persona Combination Files	X	X	101E-225E	ALKF23C	AMKF22
Persona Hoteling Laterals	X	X	101E-225E	ALKF23C	AMKF22
Persona Hutches	X	X	101E-225E	ALKF23C	AMKF22
Persona Laterals (including Custom)	X	X	101E-225E	ALKF23C	AMKF22
Persona Overfile Cabinets	X	X	101E-225E	ALKF23C	AMKF22
Persona Pedestals	X	X	101E-225E	ALKF23C	AMKF22
Persona Radius Overheads	X	X	101E-225E	ALKF23C	AMKF22
Persona Storage/Combination Cabinets	X	X	101E-225E	ALKF23C	AMKF22
Vertical Files A990/A940	X		101E-225E	ALKF23C	AMKF22

^{*}ALKF23C is chrome. Optional black core for wood casegoods is ALKF23CE4. Optional matte silver core is ALKF26EL.

122 | Allsteel Concensys – 1/2017

\$ 18

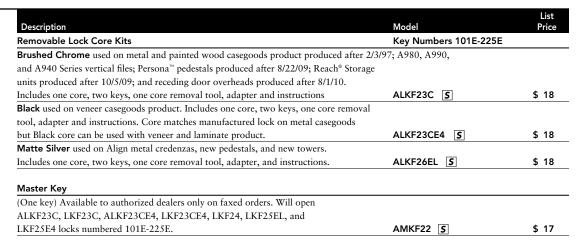


HOW TO ORDER:


Note: Numbers 101E-225E are available. Orders without numbers specified will be keyed at random. SAMPLE ORDER:

Quantity	Model	Color
6	ALKF23C	X121E
1	AMKF22	X

Includes one core, two keys, one core removal tool, adapter, and instructions

Brushed Chrome Removable Lock Core Kit*





Key Numbers 101N-225N

ALKF23CN 5

Appendix

Locking Specifications — Easy Lock Program

EASY LOCK PROGRAM

The Allsteel Easy Lock Program simplifies the lock-core ordering process when multiple cores are being specified. The Easy Lock cores can be used with Allsteel storage that currently uses the **ALKF23C** cores (all storage except Receding Door Overheads).

To ensure ease of ordering in different situations the Easy Lock cores can be specified in three different ways — Random, Specified or Sequential.

Random Keying

The Random Keying option is provided for instances where there are multiple orders or phases to a project and the offices need to be keyed alike but the key numbering is not required. With the random keying option key numbers are not specified, however, the core kits will be in sequential order from a random starting point.

Example: There are 15 offices which each have 5 black locks that need to be keyed alike, but the actual key numbers are not important.

This order would look like: LKFE5BLK.X.15

This specifies that 15 5-core kits are needed in black with random key numbers.

Specified Keying

The Specified Keying option is provided for the instances where there is a specific key number desired for all of the cores ordered.

Example: There are 10 offices which each have 2 silver locks that need to be keyed-alike with key number 202.

This order would look like: LKFE2SLV.X202.10

This specifies that 10 2-core kits are needed in silver with key number 202.

Sequential Keying

Allsteel Sequential Keying option is provided for the instances when there are multiple orders or phases to a project and it is imperative that key numbers are not duplicated.

Example: A multiple phase project has 60 total offices — 40 offices in Phase I, and 20 offices in Phase II. The project manager has expressed a need to have keyed-alike offices but doesn't want any of the offices to use the same key numbers.

The first 40 offices have 4 silver locks each that need to be keyed-alike.

This order would look like: LKFE4SLV.SEQ/101.40

This specifies that 40 4-core kits are needed in silver and the starting number is 101.

The second set of 20 offices only have 3 silver locks each that need to be keyed-alike; and it is important which key number starts off the sequence to ensure that no key number is duplicated. It is known that the first key range was key numbers 101-140.

The second order would look like: LKFE3SLV.SEQ/141.20

This specifies that 20 3-core kits are needed in silver and key sequence has to start at key number 141.

HOW TO ORDER:

Numbers 101-225 are available. Orders without key numbers specified will be keyed at random.

SAMPLE ORDER FOR EXAMPLES GIVEN:

Model	Key Type	Quantity
LKFE5BLK.	X.	15
LKFE2SLV.	X202.	10
LKFE4SLV.	SEQ/101.	40
LKFE3SLV.	SEQ/141.	20

NOTE: Quantity required is last number in model.option string.

SIN 711-1, 711-3

Description	Model / Color	List Price
Easy Lock Lock-Core		
Lock Core Kit — 1 core, 2 keys	LKFE1	\$ 18
Lock Core Kit — 2 cores, 2 keys	LKFE2	\$ 36
Lock Core Kit — 3 cores, 2 keys	LKFE3	\$ 54
Lock Core Kit — 4 cores, 2 keys	LKFE4	\$ 72
Lock Core Kit — 5 cores, 2 keys	LKFE5 L	\$ 90
Lock Core Kit — 6 cores, 2 keys	LKFE6	\$ 108
Lock Core Kit — 7 cores, 2 keys	LKFE7	\$ 126
Lock Core Kit — 8 cores, 2 keys	LKFE8	\$ 144

Add color suffix to model: SLV Silver, BLK Black, MTS Matte Silver


Note: One core removal key minimum per order. One additional core removal key per 25 lock-cores will be shipped.

Master	Key
--------	-----

(One key) Available to authorized		
dealers only on faxed orders.	AMKF22	\$ 17

How to specify using Easy Lock Program:


Step 1 — Count the number of lock cores and color required in each workstation that need to be keyed alike.



2 overheads with 1 lock-core each = 2 2 pedestals with 1 lock-core each = 2


Total silver lock-cores per station = 4

Step 2 — Count the total number of workstations needing 4 lock-cores.



4 total workstations

Step 3 — Specify model number based on total number of lock-cores in a station and quantity of kits based on number of workstations.



LKFE4SLV.X.4

Lock-Coresper station

Color of Core

Number of workstations

124 | Allsteel

Appendix

16x20 Sample Yardage and Touch-Up Paint

Open Market / GSA SIN 711-1 (as noted)




	List Price by Grade							
Model			1	2	3	4	5	6
Seating Upholstery	y Sample — 16"H x	20"W						
SYSTG S	-		\$ 113	\$ 126	\$ 134	\$ 141	\$ 154	N/A
	7	8	9	10	Leather 1	Leather 2	11	12
	\$ 170	\$ 181	\$ 190	\$ 199	\$ 228	N/A	N/A	\$ 220

• Samples have sewn edges, a grommet, and label.



	List Price by Grade									
Model		Α		В		С		D	Е	F
Systems Fabric Sample — 16"H x 20"W										
SYSFS S	\$	91	\$	98	\$	103	\$	113	N/A	N/A

• Samples have sewn edges, a grommet, and label.

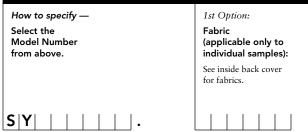

Examples: SYSFS.PNL06 SYSTG.SWG904

GSA SIN 711-1

Description	Model	ore Price	Price
Touch-Up Paint — Brush			
Bottle of Touch-Up Paint with Brush — 0.5 oz.	APTK S	\$ 60	\$ 67
Touch-Up Paint — Spray			
Spray Can of Touch-Up Paint — 12 oz.	ARSLCC 5	\$ 60	\$ 67

Core Paint Colors	Code
Black	P27
Brownstone	P7D
Bungalow	P7C
Carob	P52
Flint	P02
Fossil	P28
Loft	P7B
Muslin	P4J
Parchment	P93

Select Paint Colors	Code
Brilliant White	PQ8
Carbon Metallic (Spray Only)	P4Q
Champagne Metallic	PR.5
Gunmetal Metallic	PR3
Platinum Metallic	PR2
Silver	PR6
Tungsten	PR1



Appendix Replacement Parts Order Form

Please complete all banks for each appropriate section. Asterisk (*) is required information.

Replacement PO #*	Mark for	Date*
Installation Date	Ship to Name*	Dealer Account #* (CC#)
Requested Delivery Date	Ship to Address*	Dealer Name*
Ship Method	Ship to Address	Contact Name*
	City, State, Zip*	Contact Phone Number*
Traffic Phone Number*	Traffic Name*	Contact Email
		Contact FAX #

Ordering Hints					Reason for Replacement (apply appropriate reason number to each line)				
Syne	rgy or your ord	ed product — order as catal ering system. Do not use th order must be faxed or ema	1	1 Shortage *Shipping order number required below. Always billable with credit pending POD. Must be reported within 30 days of delivery.					
	omer Support. se alert CS of an	y special expedite requiren	nents. Fees may app	within		Please provide serial number. Must be reported vithin 30 days of delivery date if shipping to a varehouse or 15 days if shipping direct to site.			
		orders are usually shipped w	•	Non-conforming *Please provide serial number. Product			erial number.		
	•	dinator assigned to the pro		4	4 Billable Purchase order number is required. Repla parts are net priced (no discounting). *From the invoiced if order is billable. Order finite goods (cataloged items) electronically on or your operating system.			ed (no discounting). *Freight will er is billable. Order finished items) electronically on Synergy	
Qty	Serial Number	Model Number (complete with options)	Part Number (if known)		scription of art Needed	Original Shipping Order #	Reason #	Description of Damage/Problem	

Note: This form is also available on the Allsteel Synergy website.

Call Center Team – Email: <u>ASITeamCS@AllsteelOffice.com</u> Aligned Team – Email: <u>CSAlignedTeam@AllsteelOffice.com</u> National Team – Email: <u>ASINATLTeam@AllsteelOffice.com</u> **Allsteel Replacement Parts**

Cross Reference Index

by Model Number

CI U33	IZCIC	rence mae	· A		ы	ivioaei ivumber
Model	Page	Model Page	Model Page	Model Page	Model Page	Model Page
			832448M56			86183627, 83
			832454A66			86184227, 83
			832454M 56	3		,
			832460A66			
			832460M56			
801043P	24	802282P24	832466A66	834722JLM 60	8423024A67	8662430M 57
			832466M56			
			832472A			
			833007A71			
			833007M61			
			833024A66			
			833024BA68		,	
			833024BM58			
			833024M56			
			833030A66			
			833030M56			
			833036A66			
801232P	24	802569P25	833036M56	834830RM 58	85154272	891330SF22
			833042A66			
801256P	24	802732P24	833042M56	83622ELM59	85154872	891336SF22
801269P	24	802743P24	833048A66	83622ER69	851548M62	891336SG22
801282P	24	802756P24	833048M56	83622ERM 59	85155472	891342SF22
			833054A66			
			833054M 56			
			833060A66			
			833060M 56			
			833066A66			
			833066M56			
			833072A66			
			833072M 56			
			833160A70			
			833160M60			
		,	833166A70			
			833166M60 833172A70		853030BM62 853030M62	
			833172M60			
			833272LA70			
			833272LM		853636BM62	
			833272RA 70			
			833272RM 60			
			833624A68			
			833624BA68			
			833624BM58			
				8372241RM 60		
			833624RA68			
801582P	25	83133073	833624RM58	8372249RM60	8543024A67	895642P21
801713	24	831500L73	833660A70	837224LM61	8543024M57	895648P21
801713F	24	831500R73	833660BTA67	837224RM 61	854848BA72	895660P21
801732P	24	83222EL69	833660BTM57	83722EL69	854848BM62	896918P21
801743P	24	83222ELM59	833660M 60	83722ELM59	8602430A67	896924P21
			833666A70			
			833666BTA67			
			833666BTM 57			
			833666M60			
			833672A70			
			833672BTA67			
			833672BTM 57			
			833672M60			
			834224A68			
			834224BA			
			834224BM58		· ·	
			834224M 58 834224RA			
			834224RA 68 834224RM 58		· ·	
			834230A68			
			834230M 58			
			834230RA			
0021071	∠4	0.52 10.11	0J74JUINA 68	03733EE07	001030	, 10, JU111 44

Cross Reference Index Model Page Model Page

by Model Number

CI 033	IXCIC	i Clicc III	uc	^			Dy	Model	vuilibei
Model		Model				Model		Model	Page
				AFNLFTP-4236 102					
				AFNLFTP-6018 102					
				AFNLFTP-6036 102					
				AFNLFTP-6618 102					
				AFNLFTP-6636 102					
				AFNLFTP-7218 102			,		
				AFNLFTP-7236 102					
				AFNLFTP-8418 102					
				AFNLFTP-8436 102					
				AKM1116					
				AKM3116					
				AKM5116					
				AKMH116					
				AKMX116					
				ALED17U121					
				ALED17U60 121					
				ALED17UJMP30 121					
				ALED31U 121					
				ALED31U60 121					
				ALED31UJMP30 121					
				ALEDOCC121					
				ALKF23C123					
				ALKF23CE4 123					
				ALKF23CN123					
				ALKF26EL123	,				
				AM387-203A96					
				AM387-203B96					
				AM387-203I96					
				AM387-203S96					
				AM387-233A96					
				AM387-233B96					
				AM387-233I96					
				AM387-233S96					
				AM388-202A96					
				AM388-202B96					
				AM388-202I96					
				AM388-202S96					
				AM388-232A96					
				AM388-232B96					
				AM388-232I96					
			,	AM388-232S96					
				AMF22 123					
				AMKF22123					
				AMRK36 111					
				AMRK42 111					
				AMRK48 111					
				AP1050CST 97					
				AP20040AG97					
				AP51949597					
				APFB8097					
				APMC6110					
				APTK 125					
				APWRMOD2UWM 111					
				APWRMOD2WC111					
				APWRMOD3UWM 111					
				APWRMOD3WC111					
				ARSLCC 125					
				ASC42104					
				ASCSHELF 104					
				ASPT-24SC97					
				ASPT-30SC97					
				ATADF337					
				ATADF437					
	34	AFNLFTP-3018		ATADJ5 37					
				ATADIC 27	CCE24 02	ECE52CLII	101	ELECTONII	100
A871196A	34	AFNLFTP-3036		-					
A871196A A871224	34	AFNLFTP-3618	102	AWCS116	CSF30 83	ECF536HS	101	ELF536NS	100
A871196A A871224 A871224A	34 34 34	AFNLFTP-3618 AFNLFTP-3636	102	-	CSF30	ECF536HS ECF536NA	101	ELF536NS	100

Cross Reference Index

by Model Number

				/
Model Page	Model Page	Model Page	Model Page	Model Page
ELF536PI100	ET42424LFFI99	GS870948120	PF198-232B95	T612FB73
		GS870948D120		
FI F542 NA 100	ET42424LOBBFA 99	GS870948MCI 120	PF198-232S95	T7DV 83 84
	ET42424LOBBFB 99		PF198-302A95	,
		GS870960D120		
		GS870960MCL120		
		L919491 100		
		L919492 100		
		L919703 100		
ELF542PS 100	ET42424LOFFS99	LKFE124	PH149-182I95	UH6548FD 84
ELF830NA100	ET42424RBBFA99	LNKCL121	PH149-182S95	UH6560FD 84
ELF830NB100	ET42424RBBFB99	LNKDA121	PH149-202A95	UH6566FD 84
		LNKFS121		
		LNKPM 121		
		LNKSA 121		
		OH1524FD82		
		OH1530FD82		
ELF836NS 100	ET42424RFFS99	OH1530RD 82	PH149-232I95	UHTB66 84
ELF842NA100	ET42424ROBBFA 99	OH1536FD82	PH149-232S95	UHTB72 84
ELF842NB100	ET42424ROBBFB 99	OH1536RD82	PM119-232A95	WANDFS 121
ELF842NI100	ET42424ROBBFI 99	OH1542FD82	PM119-232B95	WANDFSOC121
		OH1542RD 82		
		OH1548FD82		
		OH1548RD82		
				· · · · · · · · · · · · · · · · · · ·
		OH1560FD82		,
		OH1560RD 82		
		P281520BBFA96		,
EPF23018BBFDI98	ET52424LBBFB99	P281520BBFB96	PM187-203A95	Z5SC6656, 66
EPF23018BBFDS 98	ET52424LBBFI 99	P281520BBFI96	PM187-203B95	Z5SC7256, 66
EPF23018DA98	ET52424LBBFS99	P281520BBFS96	PM187-203I95	Z5SC7856, 66
EPF23018DB 98	ET 52424LFFA 99	P281520FFA96	PM187-203S 95	Z5SC84 56, 66
		P281520FFB96		,
		P281520FFI96		
		P281520FFS96		
		P281523BBFA96		
		P281523BBFB96		
		P281523BBFI96		
EPF23018DFFI 98	ET52424LOBBFS 99	P281523BBFS96	PM187-303I95	ZW8LT 117
EPF23018DFFS98	ET52424LOFFA 99	P281523FFA 96	PM187-303S95	ZW8SM117
EPF23018DI98	ET52424LOFFB99	P281523FFB96	PM188-182A95	
		P281523FFI96		
		P281523FFS96		
		PD8097		
		PF197-183A95		
		PF197-183B95		
		PF197-183I95		
EPF23018FFDB 98	ET52424RFFA99	PF197-183S95	PM188-202S95	
EPF23018FFDI 98	ET52424RFFB 99	PF197-203A95	PM188-232A95	
EPF23018FFDS98	ET52424RFFI 99	PF197-203B95	PM188-232B95	
EPF23018SLFA98	ET52424RFFS99	PF197-203I95	PM188-232I95	
EPF23018SLFB98	ET52424ROBBFA 99	PF197-203S95	PM188-232S95	
EPF23018SLFI98	ET52424ROBBFB 99	PF197-233A95	PM188-302A95	
		PF197-233B95		
		PF197-233I95		
		PF197-233S95		
		PF197-303A95		
		PF197-303B95		
		PF197-303I95		
		PF197-303S95		
ESC536I101	ETKP24WL99	PF198-182A95	PT17-23TTP97	
		PF198-182B95		
		PF198-182I95		
ET42424LBBFA99		PF198-182S95		
ET42424LBBFB99		PF198-202A95		
		PF198-202B95		
ET42424LBBFI				
ET42424LBBFS99		PF198-202I		
		PF198-202S95		
ET42424LFFB99	GS870930MCL 120	PF198-232A95	SYSTG125	

130 | Allsteel Concensys – 1/2017

GR APF 100 Arti Blac Broi Cha Che Cop Dar Dun Espi Fran Fros Hur Jet. Law Mar Mo Nim Plat Tur Tur Wal ELE 100 Flin Indi Latt Mill Parc Sea Veil Wat Wis ETC 100 Aqu Cro Eng Inta Lith Mez Woo EXC 100 Flor Fran Lira Riya Rup Tola LAN 100 Cor Drif Kha Shee Slate Uml Urb

GRADE A	GRADE A – continued
APPOINT PANEL	LUCY
100% Polyester	100% Recycled Polyester
Artichoke APN911	AspenLC932
BlackberryAPN932	CornsilkLC930
Bronze APN922	Dusk
Carbon	Fawn
Cherry APN930	MistLC920
CopperAPN918	NeutraLC924
Dark Pewter APN917	Pewter LC935
Dune APN915	SnowdropLC928
Espresso	REFLECTIONS
Framboise	100% Recycled Polyester
Hummus APN914	Bamboo REF926
Jet	Galvanized REF929 Ice REF920
LawnAPN925	Loggia REF921
MandarinAPN929	Mistral REF928
Morel	MoonstoneREF923
Nimbus	Pewter REF922
Platinum	Stainless REF924
Turquoise	Vanilla
Walnut APN913	Winter REF927
ELEMENT	REFUGE
100% Polyester	64% Recycled Polyester 36% Polyester
Flint	ArtesianRFG996
IndigoGN967	DuneRFG992
Latte	Eclipse NEW! RFG990
Parchment GN953	Frost †
SeaGN974	Glacier † NEW!
VeilGN913	Mineral
Warm BeigeGN955	SandbarRFG995
WispGN975	TidalRFG994
ETCH	SARTO
100% Polyester	100% Polyester (45% Recycled)
Aquatint	AshSRT988
Engrave ECH902	Desert
IntaglioECH906	FogSRT914
Lithograph ECH903	LemongrassSRT949
Mezzotint ECH907 Woodcut ECH905	MeadowSRT925
EXCHANGE	Mist SRT945 Mushroom SRT976
100% Polyester	Oyster SRT978
Florin EXG908	ReefSRT964
FrancEXG902	Sesame SRT993
KronaEXG907	Shale SRT952
Lira EXG906	SisalSRT929
RiyalEXG901	Wheat SRT913
Rupee EXG903 Tolar EXG904	TANGO
LANDSCAPE	100% Polyester AficionadoTG994
100% Polyester	AzulTG993
CornsilkLN15	BongoTG980
DriftLN05	DipTG982
KhakiLN20	PalmaTG991
SheenLN10 SlateLN35	PecanTG985 PistachioTG986
Umber LN25	PlayaTG933
UrbanLN30	SalsaTG987
	SolTG992
	TequilaTG990
	TEMPEST
	100% Recycled Polyester DragonflyTP930
	FrostTP930
	Full StreamTP980
	GingerTP925
	Gold RushTP910
Discontinued 12/15/2017	Sandstorm TP950 Slate TP945
2.550 mmaca 12, 10,2017	TumbleweedTP970
	Wind ChillTP940

GRADE B

MICA	
100% Recycled Polyester	
Anthracite	MCA911
Breeze	MCA918
Bronze	MCA913
Buff	MCA914
Cremini	MCA917
Crystal †	MCAWIT
Dew	MCA920
Dove	MCA912
Fresh	MCA916
Mineral	MCA915
Nectar	MCA919
Shale	MCA910
SPIN PANEL	
46% Recycled Polyester,	

56% Polyester

Alabaster	SPIN02
Cavern	SPIN03
Cobblestone	SPIN04
Ember	SPIN06
Flame	SPIN07
Heron	SPIN13
Oat	SPIN01
Ocean	SPIN12
Plum	SPIN15
Pool	SPIN11
Raven	SPIN10
Rhubarb	
Tropic	SPIN08
Willow	SPIN05

TASANEE ◆ D

100% Polyester	
100% Polyester Birch	TSN936
Cinder	TSN959
Citrus	TSN987
Cumin	TSN998
Feather	TSN924
Frost	TSN95
Pebble	TSN948
Silk	TSN912
Water	TSN963
Willow	TSN97
TEDDAIN	

TERRAIN

52% Recycled Polyester, 48% Polyester Bay.....TRRN05 Canyon TRRN30 CrestTRRN25 DeltaTRRN10 PlateauTRRN15 Ridge.....TRRN20

ALLSTEEL PARTNERSHIP PROGRAM

Allsteel understands that customers may want to specify panel and seating textiles outside of Allsteel's standard offering. Allsteel's Partnership Program consists of on-trend and design-forward patterns that have been tested and approved by Allsteel for use on Allsteel products. A subset of these approved patterns is available on cards in the textile binder, while numerous others are available on our website, allsteeloffice.com.

For memo samples, please contact

- Carnegie, carnegiefabrics.com 1.800.727.6770
- CF Stinson, cfstinson.com 1.800.841.6279
- Edelman, edelmanleather.com 1.800.886.8339
- HBF Textiles, hbftextiles.com 1.877.494.5727
- Maharam, maharam.com 1.800.645.3943
- Momentum Textiles, memosamples.com 1.800.366.6839
- Ultrafabrics, ultrafabricsllc.com

The intent of the Partnership Program is to offer a wide variety of on-trend textiles to meet your varied needs, but since these textiles are not part of our standard offering they may be subject to extended lead times. Because new materials will be introduced regularly, Allsteel reserves the right to change the offering at any time.

GRADE C

PACT † ◆

A10c	I AC/00		
Azure	PAC911		
Calla**	PAC922		
Coastal	PAC933		
Delft	PAC944		
Dove**	PAC955		
Dragon	PAC966		
Eureka	PAC977		
Fern	PAC988		
Harbour	PAC999		
Lily	PAC910		
Lime	PAC921		
Midnight	PAC932		
Nectar	PAC943		
Patina	PAC954		
Putty**	PAC965		
Roast	PAC976		
Roma	PAC987		
Rubine	PAC998		
Sketch	PAC909		
Tanzanite	PAC920		
Taupe**	PAC931		
Toasty**	PAC942		
**Colors not available on tackboards			

SCRIPT

Almond	PMOMSCP01
Charcoal	
Feldspar	
Flint	
Nectar	PMOMSCP45
Patina	PMOMSCP56
Pebble	PMOMSCP67
Sand	PMOMSCP78
Shadow	
Slate	
Sterling	PMOMSCP11
Taupe	PMOMSCP22
Zinc	PMOMSCP33

- Panel fabric is not available on Concensys.
- Panel fabric is not available on Involve®.

Multi-use fabrics are seating fabrics that can be used on specific Allsteel panels systems, providing more color and pattern options. The applicable Allsteel multi-use fabrics are noted with System designators in the Seating, Collaboration, and Tables Price List.

ZebraTP935

SPECIFICATION AND PRICE LIST 2017

prices effective January 29

SHOWROOMS

Atlanta

Boston

Chicago

Dallas

Los Angeles

New York

San Francisco

Washington, DC



Allsteel Inc. Muscatine, Iowa 52761-5257 allsteeloffice.com

©2017 Allsteel Inc. All registered trademarks and trademarks are the property of Allsteel Inc