CML2PRXXXX - RIGHT TWO WAY RETURN END OF RUN GALLERY PANEL WITH END CONNECTIONS

- Provides floor standing support while enclosing the end of a panel run.
- Attached at the end of a gallery panel with connectors to form an L configuration.
- Connections are at one exposed end.
- Includes all attachment hardware and glides.
- Total height is inclusive of panel glides extended to their full height.
- 25" wide gallery panel accommodates a 24" deep surface while the 31" wide accommodates a 30" deep surface.
- Please specify LP laminate finish and PVC edge finish.
- If a wood grain laminate is chosen, grain direction run horizontally.
- Gallery panel is edged in PVC on exposed edges and self edged on edge connecting to panel and bottom edge.

| DESCRIPTION | PRODUCT CODE | LIST PRICE | DIMENSIONS/INCHES | | | |
|--------------------------|--------------|------------|-------------------|----|---|--|
| | | | Н | W | D | |
| Two Way Return | CML2PR4225 | 488 | 42 | 25 | 1 | |
| End of Run Gallery Panel | CML2PR4231 | 501 | 42 | 31 | 1 | |
| | CML2PR4825 | 543 | 48 | 25 | 1 | |
| | CML2PR4831 | 558 | 48 | 31 | 1 | |
| | CML2PR5425 | 598 | 54 | 25 | 1 | |
| | CML2PR5431 | 615 | 54 | 31 | 1 | |
| | | | | | | |

CML3PLXXXX - LEFT THREE WAY RETURN END OF RUN GALLERY PANEL

- Provides floor standing support while enclosing the end of a gallery panel run.
- Attached at the end of a gallery panel with connectors to form a T configuration.
- There are no connections at the exposed ends. Connection is at the center of the interior face.
- Connects to CMLXPLxxxx or CMLSEPLxxxx.
- · Includes all attachment hardware and glides.
- Total height is inclusive of panel glides extended to their full height.
- 49" wide gallery panel accommodates two 24" deep surface while the 61" wide accommodates two 30" deep surfaces.
- Please specify LP laminate finish and PVC edge finish.
- If a wood grain laminate is chosen, grain direction run horizontally.
- Gallery panel is edged in PVC on exposed edges and self edged on edge connecting to panel and bottom edge.

| | DESCRIPTION | PRODUCT CODE | LIST PRICE | DIMENSIONS/INCHES | | | |
|-------|--------------------------|--------------|------------|-------------------|----|---|--|
| | | | | Н | W | D | |
| | Three Way Return | CML3PL4249 | 676 | 42 | 49 | 1 | |
| | End of Run Gallery Panel | CML3PL4261 | 802 | 42 | 61 | 1 | |
| . `` | | CML3PL4849 | 754 | 48 | 49 | 1 | |
| | | CML3PL4861 | 894 | 48 | 61 | 1 | |
| | | CML3PL5449 | 830 | 54 | 49 | 1 | |
| · · · | | CML3PL5461 | 985 | 54 | 61 | 1 | |

CML3PRXXXX - RIGHT THREE WAY RETURN END OF RUN GALLERY PANEL

- Provides floor standing support while enclosing the end of a gallery panel run.
- Attached at the end of a gallery panel with connectors to form a T configuration.
- There are no connections at the exposed ends. Connection is at the center of the interior face.
- Connects to CMLXPRxxxx or CMLSEPRxxxx.
- Includes all attachment hardware and glides.
- Total height is inclusive of panel glides extended to their full height.
- 49" wide gallery panel accommodates two 24" deep surface while the 61" wide accommodates two 30" deep surfaces.
- Please specify LP laminate finish and PVC edge finish.
- If a wood grain laminate is chosen, grain direction run horizontally.
- Gallery panel is edged in PVC on exposed edges and self edged on edge connecting to panel and bottom edge.

| DESCRIPTION | PRODUCT CODE | LIST PRICE | DIMENSIONS/INCHES | | |
|-------------------------|--------------|------------|-------------------|----|---|
| | | | Н | W | D |
| Three Way Return | CML3PR4249 | 676 | 42 | 49 | 1 |
| End of Run Gallery Pane | CML3PR4261 | 802 | 42 | 61 | 1 |
| | CML3PR4849 | 754 | 48 | 49 | 1 |
| | CML3PR4861 | 894 | 48 | 61 | 1 |
| | CML3PR5449 | 830 | 54 | 49 | 1 |
| | CML3PR5461 | 985 | 54 | 61 | 1 |

CMLXPLXXXX - LEFT EXTENSION END OF RUN RETURN GALLERY PANEL WITH END CONNECTION

- Provides floor standing support while enclosing the end of a gallery panel run.
- Attached at the end of a panel to allow for extending the gallery panel run.
- Connections at both exposed ends, one to connect to the panel and one to connect to another gallery panel.
- Includes all attachment hardware and glides.

- Total height is inclusive of panel glides extended to their full height.
- Please specify LP laminate finish and PVC edge finish.
- If a wood grain laminate is chosen, grain direction run horizontally.
- Gallery panel is edged in PVC on exposed edged and self edges on edge connecting to panel.

| | DESCRIPTION | PRODUCT CODE | LIST PRICE | DIMI | ENSIONS/IN | CHES | |
|----------|----------------------|--------------|------------|------|------------|------|--|
| | | | | Н | W | D | |
| | Extension End of Run | CMLXPL4224 | 790 | 42 | 24 | 1 | |
| | Return Gallery Panel | CMLXPL4230 | 475 | 42 | 30 | 1 | |
| | | CMLXPL4236 | 547 | 42 | 35 | 1 | |
| | | CMLXPL4242 | 687 | 42 | 42 | 1 | |
| | | CMLXPL4248 | 706 | 42 | 48 | 1 | |
| | | CMLXPL4824 | 418 | 48 | 24 | 1 | |
| | | CMLXPL4830 | 491 | 48 | 30 | 1 | |
| N | | CMLXPL4836 | 561 | 48 | 36 | 1 | |
| | | CMLXPL4842 | 706 | 48 | 42 | 1 | |
| | | CMLXPL4848 | 728 | 48 | 48 | 1 | |
| | | CMLXPL5424 | 446 | 54 | 24 | 1 | |
| | | CMLXPL5430 | 523 | 54 | 30 | 1 | |
| | | CMLXPL5436 | 601 | 54 | 36 | 1 | |
| | | CMLXPL5442 | 678 | 54 | 42 | 1 | |
| | | CMLXPL5448 | 833 | 54 | 48 | 1 | |

CMLXPRXXXX - RIGHT EXTENSION END OF RUN RETURN GALLERY PANEL WITH END CONNECTION

- Provides floor standing support while enclosing the end of a gallery panel run.
- Attached at the end of a panel to allow for extending the gallery panel run.
- Connections at both exposed ends, one to connect to the panel and one to connect to another gallery panel.
- Includes all attachment hardware and glides.

- Total height is inclusive of panel glides extended to their full height.
- Please specify LP laminate finish and PVC edge finish.
- If a wood grain laminate is chosen, grain direction run horizontally.
- Gallery panel is edged in PVC on exposed edged and self edges on edge connecting to panel.

| DESCRIPTION | PRODUCT CODE | LIST PRICE | DIMI | ENSIONS/ING | CHES | |
|----------------------|--------------|------------|------|-------------|------|--|
| | | | Н | W | D | |
| Extension End of Run | CMLXPR4224 | 790 | 42 | 24 | 1 | |
| Return Gallery Panel | CMLXPR4230 | 475 | 42 | 30 | 1 | |
| · | CMLXPR4236 | 547 | 42 | 35 | 1 | |
| | CMLXPR4242 | 687 | 42 | 42 | 1 | |
| | CMLXPR4248 | 706 | 42 | 48 | 1 | |
| | CMLXPR4824 | 418 | 48 | 24 | 1 | |
| | CMLXPR4830 | 491 | 48 | 30 | 1 | |
| | CMLXPR4836 | 561 | 48 | 36 | 1 | |
| | CMLXPR4842 | 706 | 48 | 42 | 1 | |
| | CMLXPR4848 | 728 | 48 | 48 | 1 | |
| | CMLXPR5424 | 446 | 54 | 24 | 1 | |
| | CMLXPR5430 | 523 | 54 | 30 | 1 | |
| | CMLXPR5436 | 601 | 54 | 36 | 1 | |
| | CMLXPR5442 | 678 | 54 | 42 | 1 | |
| | CMLXPR5448 | 833 | 54 | 48 | 1 | |

CMLXPLXXXXNC - EXTENSION END OF RUN, LEFT, NO CONNECTION

- Provides floor standing support while enclosing the end of a gallery panel run.
- Attached at the end of a gallery panel to extend the gallery panel run.
- Connections only at one exposed end.
- Includes all attachment hardware and glides.
- Total height is inclusive of panel glides extended to their full height.
- Please specify LP laminate finish and PVC edge finish.
- If a wood grain laminate is chosen, grain direction run horizontally.
- Gallery panel is edged in PVC on exposed edges and self edged on edge connecting to panel.

| DESCRIPTION | PRODUCT CODE | LIST PRICE | DIM | DIMENSIONS/INCHES | | |
|------------------------------------|--|---|--|--|----------------------------|--|
| | | | Н | W | D | |
| Extension End of Run Gallery Panel | CMLXPL4224NC CMLXPL4230NC CMLXPL4236NC CMLXPL4242NC CMLXPL4242NC | 403 472 543 684 703 | 42 42 42 42 42 42 | 24 30 35 42 48 | 1 1 1 1 1 | |
| | CMLXPL4824NC CMLXPL4830NC CMLXPL4836NC CMLXPL4842NC CMLXPL4848NC CMLXPL5424NC CMLXPL5430NC | 415 488 558 703 725 444 521 | 48 48 48 48 48 54 54 | 24 30 36 42 48 24 30 | 1 1 1 1 1 1 | |
| | CMLXPL5436NC CMLXPL5436NC CMLXPL5442NC CMLXPL5448NC | 598 676 830 | 54 54 54 54 | 36 42 48 | 1 1 1 | |

CMLXPLXXXXNC • EXTENSION END OF RUN, RIGHT, NO CONNECTION

- Provides floor standing support while enclosing the end of a gallery panel run.
- Attached at the end of a gallery panel to extend the gallery panel run.
- Connections only at one exposed end.
- Includes all attachment hardware and glides.
- Total height is inclusive of panel glides extended to their full height.
- Please specify LP laminate finish and PVC edge finish.
- If a wood grain laminate is chosen, grain direction run horizontally.
- Gallery panel is edged in PVC on exposed edges and self edged on edge connecting to panel.

| | DESCRIPTION | PRODUCT CODE | LIST PRICE | DIMENSIONS/INCHES | | | |
|---------------|------------------------------------|--------------|------------|-------------------|----|---|--|
| | | | | Н | W | D | |
| | Extension End of Run Gallery Panel | CMLXPR4224NC | 403 | 42 | 24 | 1 | |
| | | CMLXPR4230NC | 472 | 42 | 30 | 1 | |
| | | CMLXPR4236NC | 543 | 42 | 35 | 1 | |
| | | CMLXPR4242NC | 684 | 42 | 42 | 1 | |
| | | CMLXPR4248NC | 703 | 42 | 48 | 1 | |
| | | CMLXPR4824NC | 415 | 48 | 24 | 1 | |
| | | CMLXPR4830NC | 488 | 48 | 30 | 1 | |
| \rightarrow | | CMLXPR4836NC | 558 | 48 | 36 | 1 | |
| | | CMLXPR4842NC | 703 | 48 | 42 | 1 | |
| | | CMLXPR4848NC | 725 | 48 | 48 | 1 | |
| | | CMLXPR5424NC | 444 | 54 | 24 | 1 | |
| | | CMLXPR5430NC | 521 | 54 | 30 | 1 | |
| | | CMLXPR5436NC | 598 | 54 | 36 | 1 | |
| | | CMLXPR5442NC | 676 | 54 | 42 | 1 | |
| | | CMLXPR5448NC | 830 | 54 | 48 | 1 | |

D

CMHLPBB01 - GALLERY PANEL BRACKET

- Gallery panel bottom bracket connects two gallery end panels at bottom with screws.
- Available in standard paint colors.
- Screws are included with the bracket.

· Screws are included with the bracket.

| DESCRIPTION | PRODUCT CODE | LIST PRICE | DIMEN H | ISIONS/INCH W | IES D |
|-------------|--------------|------------|------------|------------------|----------|
| Bracket | CMHLPBB01 | 46 | 1.5 | 8 | 1 |

CMHLPCB01 - GALLERY PANEL CORNER BRACKET

• Gallery panel corner bottom bracket connects two laminate panels at 90 degrees.

• Available in standard paint colors.

•

0

| | DESCRIPTION | PRODUCT CODE | LIST PRICE | DIMENSIONS/INCHES | | CHES | |
|-----|----------------|--------------|------------|-------------------|---|------|--|
| | | | | Н | W | D | |
| | Corner Bracket | CMHLPCB01 | 44 | 1.5 | 4 | 4 | |
| v v | | | | | | | |

CMPDSL/R - SLIDING PRIVACY DOOR

- Sliding Privacy Door attaches to Compile Panels using standard connectors to add privacy. Brackets that attach to Connectors are included.
- This door must mount on panels of equal width. It is also intended to be used for openings of equal width.
- Left (L) or right-handedness (R) is determined by the direction of door movement (from compressed to expanded position), while facing the door on the panel mounted side.
- Painted frame may match any Compile Standard Paint Finish. The door interior is standard with a louvered acrylic finish.
- STL paint on Compile sliding doors is a smooth finish paint comparable to the standard STL paint offering."
- Telescoping arms eliminate the need for thresholds, wheels or casters.
- Thickness of louvered acrylic is 6 mm.

| DESCRIPTION | PRODUCT CODE | LIST PRICE | DIMENSIONS/INCHES H W D | | |
|---------------------------------|--|------------------------------|----------------------------|----------------------|--|
| Sliding Privacy Door - 66" High | CMPDSL6636R CMPDSL6636L CMPDSL6642R CMPDSL6642L | 3131 3131 3214 3214 | 66 66 66 66 | 36 36 42 42 | |

CMFMA - MINI PANEL KIT

- Compile's Mini Panel Kits are now available to our dealers and their sales staff. The Compile mini panel is an excellent sales tool featuring two panel and samples of various hardware and electrical components and consists of the following:
- One Monolithic Mini Panel (Laminate side one / Acoustic side two).
- One Segmented Glazed Mini panel.
- One 2-way Universal Corner Post Kit.
- Two 24" Raceway Cover with Punch Out.
- Two 24" Raceway Cover with out Punch Out.
- One Raceway Cut Out Cover.

- One 3-way Post Base Cover.
- One End of Run Trim.
- One Pair of Corner Brackets.
- One Mid span Worksurface Support Bracket.
- One Duplex.
- One Power Distribution Harness.
- One Mesh jumper.
- One Carry Bag.

| DESCRIPTION | PRODUCT CODE | LIST PRICE | DIMENSIONS/INCHES | | | |
|----------------|---------------|------------|-------------------|----|-------|--|
| | | | Н | W | D | |
| Mini Panel Kit | CMFMA2418KIT1 | 2434 | 30 | 24 | 2 7/8 | |

PANELS

- **CHP POST PACKAGE** Universal Post with all "Quick-Connection" clips.
- Post trim(s)

• Post base and top cap

| | DESCRIPTION | PRODUCT CODE | LIST PRICE | DIMEN | SIONS/INCHE | S |
|----------|--|--------------|------------|-------|-------------|-----|
| | | | | Н | W | D |
| ĥ | 2 - Way Post | CHP30-2 | 115 | 30 | 2.3 | 2.3 |
| | | CHP42-2 | 115 | 42 | 2.3 | 2.3 |
| | | CHP46-2 | 167 | 46 | 2.3 | 2.3 |
| | | CHP54-2 | 142 | 54 | 2.3 | 2.3 |
| | | CHP58-2 | 209 | 58 | 2.3 | 2.3 |
| | | CHP60-2 | 209 | 60 | 2.3 | 2.3 |
| | | CHP64-2 | 247 | 64 | 2.3 | 2.3 |
| | | CHP66-2 | 167 | 66 | 2.3 | 2.3 |
| | | CHP70-2 | 241 | 70 | 2.3 | 2.3 |
| ₩ | | CHP72-2 | 241 | 72 | 2.3 | 2.3 |
| * | | CHP78-2 | 274 | 78 | 2.3 | 2.3 |
| | | CHP82-2 | 288 | 82 | 2.3 | 2.3 |
| | | CHP90-2 | 288 | 90 | 2.3 | 2.3 |
| | | | | | | |
| Ŵ | 3 - Way Post | CHP30-3 | 101 | 30 | 2.3 | 2.3 |
| | | CHP42-3 | 101 | 42 | 2.3 | 2.3 |
| | | CHP46-3 | 151 | 46 | 2.3 | 2.3 |
| | | CHP54-3 | 126 | 54 | 2.3 | 2.3 |
| | | CHP58-3 | 189 | 58 | 2.3 | 2.3 |
| | | CHP60-3 | 189 | 60 | 2.3 | 2.3 |
| | | CHP64-3 | 201 | 64 | 2.3 | 2.3 |
| | | CHP66-3 | 151 | 66 | 2.3 | 2.3 |
| | | CHP70-3 | 217 | 70 | 2.3 | 2.3 |
| Ψ | | CHP72-3 | 217 | 72 | 2.3 | 2.3 |
| 7 | | CHP78-3 | 247 | 78 | 2.3 | 2.3 |
| | | CHP82-3 | 258 | 82 | 2.3 | 2.3 |
| | | CHP90-3 | 286 | 90 | 2.3 | 2.3 |
| | | | | | | |
| ĥ | 4 - Way Post | CHP30-4 | 82 | 30 | 2.3 | 2.3 |
| | *No trim or base. Includes top cap only. | CHP42-4 | 82 | 42 | 2.3 | 2.3 |
| | | CHP46-4 | 138 | 46 | 2.3 | 2.3 |
| | | CHP54-4 | 106 | 54 | 2.3 | 2.3 |
| | | CHP58-4 | 154 | 58 | 2.3 | 2.3 |
| | | CHP60-4 | 154 | 60 | 2.3 | 2.3 |
| | | CHP64-4 | 163 | 64 | 2.3 | 2.3 |
| | | CHP66-4 | 126 | 66 | 2.3 | 2.3 |
| | | CHP70-4 | 180 | 70 | 2.3 | 2.3 |
| | | CHP72-4 | 180 | 72 | 2.3 | 2.3 |
| लीक | | CHP78-4 | 204 | 78 | 2.3 | 2.3 |
| | | CHP82-4 | 213 | 82 | 2.3 | 2.3 |
| | | CHP90-4 | 238 | 90 | 2.3 | 2.3 |

CHPXW - 90 DEGREE CORNER POST KIT FOR OVER PANELS

• Specify the corner post height that matches the height of the over panel

- 2-way kits include 2 trims (CMETPxx), 2 way post base (CMPCxx) and post cap (CMPC).
- 3-way kits include 2 trim (CMETPxx), 3 way post base (CMPCxx) and post cap (CMPC).

| | DESCRIPTION | PRODUCT CODE | LIST PRICE | DIMENSIONS/INCHES | | |
|--------------|---|--------------|------------|-------------------|-----|-----|
| | | | | Н | W | D |
| r ê n | 90 Degree Corner Post Kit for Over Panels | CHOP12-2 | 75 | 12 | 2.3 | 2.3 |
| | - | CHOP12-3 | 64 | 12 | 2.3 | 2.3 |
| | | CHOP12-4 | 44 | 12 | 2.3 | 2.3 |
| | | CHOP16-2 | 75 | 16 | 2.3 | 2.3 |
| | | CHOP16-3 | 75 | 16 | 2.3 | 2.3 |
| | | CHOP16-4 | 64 | 16 | 2.3 | 2.3 |
| | | CHOP24-2 | 84 | 24 | 2.3 | 2.3 |
| | | CHOP24-3 | 75 | 24 | 2.3 | 2.3 |
| | | CHOP24-4 | 63 | 24 | 2.3 | 2.3 |
| | | | | | | |

CHPXW - 60 DEGREE POST PACKAGE

• Universal Post with all "Quick-Connection" clips.

- Post trim is incorporated into 2 Way aluminum post extrusion.
- Post top cap

- Outer part of the post is the full panel height and the inner part of the post is 6" shorter.
- 3 Way post is 6" shorter than panel height to accommodate electric and base.
- PVC post trims can not be added to 60 degree posts.

• 4-way kits include post cap (CMPC) only.

| | DESCRIPTION | PRODUCT CODE | LIST PRICE | DIMENSIONS/INCHES | | |
|----|----------------------------------|--------------|------------|-------------------|-----|-----|
| | | | | Н | W | D |
| N | 2 - Way - 60 Degree Post Package | CHP2W30 | 82 | 30 | 2.3 | 2.3 |
| | , , , | CHP2W42 | 82 | 42 | 2.3 | 2.3 |
| | | CHP2W46 | 106 | 46 | 2.3 | 2.3 |
| | | CHP2W54 | 106 | 54 | 2.3 | 2.3 |
| | | CHP2W58 | 145 | 58 | 2.3 | 2.3 |
| | | CHP2W60 | 159 | 60 | 2.3 | 2.3 |
| | | CHP2W64 | 172 | 64 | 2.3 | 2.3 |
| | | CHP2W66 | 126 | 66 | 2.3 | 2.3 |
| | | CHP2W70 | 183 | 70 | 2.3 | 2.3 |
| U. | | CHP2W72 | 183 | 72 | 2.3 | 2.3 |
| | | CHP2W78 | 204 | 78 | 2.3 | 2.3 |
| | | CHP2W82 | 213 | 82 | 2.3 | 2.3 |
| | | CHP2W90 | 234 | 90 | 2.3 | 2.3 |
| M | 3 - Way - 60 Degree Post Package | CHP3W30 | 82 | 30 | 2.3 | 2.3 |
| | , , , | CHP3W42 | 82 | 42 | 2.3 | 2.3 |
| | | CHP3W46 | 116 | 46 | 2.3 | 2.3 |
| | | CHP3W54 | 106 | 54 | 2.3 | 2.3 |
| | | CHP3W58 | 145 | 58 | 2.3 | 2.3 |
| | | CHP3W60 | 159 | 60 | 2.3 | 2.3 |
| | | CHP3W64 | 172 | 64 | 2.3 | 2.3 |
| | | CHP3W66 | 126 | 66 | 2.3 | 2.3 |
| | | CHP3W70 | 183 | 70 | 2.3 | 2.3 |
| | | CHP3W72 | 183 | 72 | 2.3 | 2.3 |
| ~0 | | CHP3W78 | 204 | 78 | 2.3 | 2.3 |
| | | CHP3W82 | 213 | 82 | 2.3 | 2.3 |
| | | CHP3W90 | 234 | 90 | 2.3 | 2.3 |

CMRCXXNP - COMPILE RACEWAY COVER - WITHOUT KNOCKOUTS

- No electrical knockouts included.
- Note: Made of reinforced aluminum.

| DESCRIPTION | PRODUCT CODE | LIST PRICE | DIME H | NSIONS/INC W | CHES D |
|--|--|--|-----------|--|-----------|
| Compile Raceway Cover Without Knockouts | CMRC24NP CMRC30NP CMRC36NP CMRC42NP CMRC48NP CMRC48NP CMRC54NP CMRC50NP | 18 22 25 27 30 37 39 | | 24 30 36 42 48 54 60 | |

CMRCXXPO - COMPILE RACEWAY COVER - WITH KNOCKOUTS

- Contains one knockout for 24"w and three knockouts for 30"w+.
- Raceway Knockout Cover must be added to openings where duplex receptacles are not used.
- Note: Made of reinforced aluminum.

| DESCRIPTION | PRODUCT CODE | LIST PRICE | DIME | NSIONS/INC | CHES |
|-----------------------|--------------|------------|------|------------|------|
| | | | Н | W | D |
| Compile Raceway Cover | CMRC24PO | 18 | | 24 | |
| With Knockouts | CMRC30P0 | 22 | | 30 | |
| | CMRC36PO | 25 | | 36 | |
| | CMRC42PO | 27 | | 42 | |
| | CMRC48PO | 30 | | 48 | |
| | CMRC54PO | 37 | | 54 | |
| | CMRC60PO | 39 | | 60 | |

CMRCB01 - COMPILE RACEWAY KNOCKOUT COVER

• Fills knockout when duplex is not used.

/ _

- Available in Black, White, Nevada, and Fog.
- Note: Knockout covers are made of plastic.

| DESCRIPTION | PRODUCT CODE | LIST PRICE | | | | |
|--------------------------------|--------------|------------|---|---|---|--|
| | | | Н | W | D | |
| Compile Raceway Knockout Cover | CMRCB01 | 17 | | | | |

CHP - 90-DEGREE UNIVERSAL CORNER POST

Post trim inserts are specified separately.

- Available in 42", 54" and 66"h.
- Standard Compile paint options.
- Specify the corner post height that matches the tallest or smallest panel connection.
- Can be used for any variation of 90-degree connections: 2-way, 3-way or 4-way.
- · Requires post trim inserts to finish off post where there are no panel connections.
- 6" shorter than panel height to accommodate electric in base.
- Requires a post basecover to finish off post at the base (for 2- or 3-way). Refer to CMPC.
- See Panel Configuration Tips for application.
- Made of aluminum.

| DESCRIPTION | PRODUCT CODE | LIST PRICE | DIMI H | ENSIONS/INC W | HES D | |
|---------------------------------|----------------------------------|-----------------------|----------------------|------------------|----------|--|
| 90-Degree Universal Corner Post | CHP30 CHP42 CHP54 CHP66 | 76 76 99 121 | 30 36 48 60 | | | |

CMET - END OF RUN TRIM INSERT FOR PANEL

- Trim inserts are not included with panels.
- Cannot be used for a universal post application.
- Used at the end of each panel run and cannot be used to attach a panel run to a fixed wall.
- Vertical trims must be specified separately. Trim snaps in the panel at the end of run.

| | DESCRIPTION | PRODUCT CODE | LIST PRICE | DIM | ENSIONS/IN | CHES |
|---|----------------------------------|--------------|------------|-----|------------|------|
| | | | | Н | W | D |
| 4 | End of Run Trim Insert for Panel | CMET16 | 18 | 16 | 2.3 | 0.5 |
| | | CMET30 | 21 | 30 | 2.3 | 0.5 |
| | | CMET42 | 21 | 42 | 2.3 | 0.5 |
| | | CMET46 | 22 | 46 | 2.3 | 0.5 |
| | | CMET48 | 25 | 48 | 2.3 | 0.5 |
| | | CMET54 | 25 | 54 | 2.3 | 0.5 |
| | | CMET58 | 26 | 58 | 2.3 | 0.5 |
| | | CMET60 | 26 | 60 | 2.3 | 0.5 |
| | | CMET64 | 27 | 64 | 2.3 | 0.5 |
| | | CMET66 | 27 | 66 | 2.3 | 0.5 |
| | | CMET70 | 29 | 70 | 2.3 | 0.5 |
| | | CMET72 | 29 | 72 | 2.3 | 0.5 |
| U | | CMET78 | 31 | 78 | 2.3 | 0.5 |
| | | CMET82 | 32 | 82 | 2.3 | 0.5 |
| | | CMET90 | 38 | 90 | 2.3 | 0.5 |

- - Standard Compile paint options.
 - See Panel Configuration Tips for application.
 - Trims are PVC.

D

CMETP - TRIM INSERT FOR UNIVERSAL CORNER POST

- Does not come with a post.
- Trim installs on all exposed sides of a Universal Corner Post.
- Specify to equal post height.
- Trims must be specified separately. Trim snaps in the post.

- Available in standard Compile paint options.
- 6" shorter than Universal Corner Post to accommodate Post Base Cover (must be specified separate)
- See Panel Configuration Tips for application.

| | DESCRIPTION | PRODUCT CODE | LIST PRICE | DIME | NSIONS/ING | CHES |
|--------------|---------------------------------------|--------------|------------|------|------------|------|
| | | | | Н | W | D |
| M | Trim Insert for Universal Corner Post | CMETP30 | 17 | 30 | 2.3 | 0.5 |
| | | CMETP42 | 17 | 42 | 2.3 | 0.5 |
| | | CMETP46 | 22 | 46 | 2.3 | 0.5 |
| | | CMETP48 | 14 | 48 | 2.3 | 0.5 |
| | | CMETP54 | 18 | 54 | 2.3 | 0.5 |
| | | CMETP58 | 24 | 58 | 2.3 | 0.5 |
| | | CMETP60 | 26 | 60 | 2.3 | 0.5 |
| | | CMETP64 | 27 | 64 | 2.3 | 0.5 |
| | | CMETP66 | 19 | 66 | 2.3 | 0.5 |
| | | CMETP70 | 30 | 70 | 2.3 | 0.5 |
| | | CMETP72 | 30 | 72 | 2.3 | 0.5 |
| | | CMETP78 | 31 | 78 | 2.3 | 0.5 |
| \mathbb{P} | | CMETP82 | 33 | 82 | 2.3 | 0.5 |
| | | CMETP90 | 38 | 90 | 2.3 | 0.5 |

CMET - TRIM INSERT FOR STEP DOWN

 Does not come with a post. Trim inserts are not included with Universal Corner Posts.

- Specify to meet the taller post.
- Trim snaps in the post or end of run at a change in height.

- Available in standard Compile paint options.
- Can not be applied to 60 degree posts.
- See Panel Configuration Tips for application.

| DESCRIPTION | PRODUCT CODE | LIST PRICE | DIMENSIONS/INCHES H W D | |
|---------------------------|--|----------------------------|----------------------------|--|
| Trim Insert for Step Down | CMET06 CMET12 CMET18 CMET24 CMET36 | 11 14 18 24 29 | 6 12 18 24 36 | |
| | | | | |

CHWAXX - WALL ADAPTER

- Same profile as vertical extrusion.
- Wall attachment hardware not provided.
- Made of aluminum.

| | DESCRIPTION | PRODUCT CODE | LIST PRICE | DIM | ENSIONS/INC | CHES | |
|----------|--------------|--------------|------------|-----|-------------|------|--|
| | | | | Н | W | D | |
| n | Wall Adapter | CHWA30 | 47 | 30 | 2.36 | .79 | |
| | | CHWA42 | 64 | 42 | 2.36 | .79 | |
| | | CHWA46 | 64 | 46 | 2.36 | .79 | |
| | | CHWA48 | 64 | 48 | 2.36 | .79 | |
| | | CHWA54 | 81 | 54 | 2.36 | .79 | |
| | | CHWA58 | 81 | 58 | 2.36 | .79 | |
| | | CHWA60 | 94 | 60 | 2.36 | .79 | |
| | | CHWA64 | 94 | 64 | 2.36 | .79 | |
| | | CHWA66 | 94 | 66 | 2.36 | .79 | |
| | | CHWA70 | 108 | 70 | 2.36 | .79 | |
| | | CHWA72 | 108 | 72 | 2.36 | .79 | |
| | | CHWA78 | 121 | 78 | 2.36 | .79 | |
| | | CHWA82 | 136 | 82 | 2.36 | .79 | |
| | | CHWA90 | 149 | 90 | 2.36 | .79 | |

CWMA - VERTICAL CHANNEL

- Used to attach system components to fixed wall.
- Panel frame finish.
- Comes in 60" length only.
- Care should be taken to mount adapters only to wall studs using correct fasteners.
- Does not include mounting hardware. Mounting hardware selection to be based on wall material. Sold in pairs.
- Failure to do this may result in collapse of the unit and subsequent possible personal injury.
- Compile vertical channels cannot be shared.

| DESCRIPTION | PRODUCT CODE | LIST PRICE | DIMEN: H | SIONS/INCHI W | ES D |
|------------------|--------------|------------|-------------|------------------|---------|
| Vertical Channel | CWMA60 | 39 | 60 | 0.6 | 0.7 |

CMPC - UNIVERSAL POST CAP

- Comes standard with universal post.
- Specified separately for reconfiguration purposes.

- Available in standard Compile paint options.
- Made of PVC.

| DESCRIPTION | PRODUCT CODE | LIST PRICE | DIMENSIONS/INCHES | | |
|--------------------|--------------|------------|-------------------|---|---|
| | | | Н | W | D |
| Universal Post Cap | CMPC | 8 | 2 3⁄8 | | |
| | | | | | |

CMPC - POST BASE COVER

- Post Base Covers are not included with Universal Corner Posts.
- Base trim for universal post. These are connected with screws at the base and the trims at the post will slide to meet.
- Available for 2-way and 3-way configurations.
- Finish is smooth plastic.
- Available in standard Compile paint options.

| DESCRIPTION | PRODUCT CODE | LIST PRICE | DIM H | ENSIONS/INCHES W | S D |
|------------------------------------|--------------|------------|----------|---------------------|--------|
| Post Base Cover - 3-Way Connection | CMPC1 | 13 | 6 | | |
| Post Base Cover - 2-Way Connection | CMPC2 | 14 | 6 | | |

CMHLPF - FLAT LEG FOR FREESTANDING PANELS

- Not intended to add to a run of panels in conjunction with Leveling Glides.
- Kit will contains one legs and all attachment hardware.
- For the installation the customer will have to remove the existing levelers on the

panel and replace it with the legs.

• Please specify paint finish.

| | DESCRIPTION | PRODUCT CODE | LIST PRICE | DIMI | ENSIONS/INC | CHES | |
|----|-----------------|--------------|------------|------|-------------|------|--|
| | | | | Н | W | D | |
| 1 | Single Flat Leg | CMHLPF01 | 126 | .31 | 21 | 3 | |
| 11 | | | | | | | |

CMHLPF - FLAT LEG FOR FREESTANDING PANELS

- Double kit for freestanding applications.
- Kit will contains two legs and all attachment hardware.

• Please specify paint finish.

• Note: Leg is on available for freestanding panels 42" to 60" wide.

• For the installation the customer will have to remove the existing levelers on the panel and replace it with the legs.

| | DESCRIPTION | PRODUCT CODE | LIST PRICE | DIME H | NSIONS/INC | HES D | |
|-------|-----------------|--------------|------------|-----------|------------|----------|--|
| | Double Flat Leg | CMHLPF02 | 249 | .31 | 21 | 3 | |
| ti ti | | | | | | | |

CMHLLP01 - LOW PROFILE FOOT

• Provides added support to a panel under load.

Made of powder coated steel.

• Adjustable glides and connectors included.

| | DESCRIPTION | PRODUCT CODE | LIST PRICE | DIME | ENSIONS/INC | HES | |
|---|------------------|--------------|------------|------|-------------|-----|--|
| | | | | Н | W | D | |
| Î | Low Profile Foot | CMHLLP01 | 186 | 12 | 11 | 1.1 | |

CMHLLP02 - LOW PROFILE FOOT

- Provides added support to a panel under load.
- Adjustable glides and connectors included.

- Made of powder coated steel.
- Set includes 2 complete legs.

| | DESCRIPTION | PRODUCT CODE | LIST PRICE | DIMENSIONS/INCHES | | HES | |
|----|-------------------------|--------------|------------|-------------------|----|-----|--|
| | | | | Н | W | D | |
| โก | Double Low Profile Foot | CMHLLP02 | 371 | 12 | 11 | 1.1 | |



CMPS - POST SEPARATOR

- Creates a diagonal division within a compile post.
- Please specify post height.

| DESCRIPTION | PRODUCT CODE | LIST PRICE | DIME H | ENSIONS/INC W | HES D |
|----------------|--------------|------------|-----------|------------------|----------|
| Post Separator | CMPS01 | 154 | 96 | 3.25 | 14 |

electrical

ELECTRICAL

STEP-BY-STEP SPECIFICATION – 8-WIRE ELECTRICAL SYSTEM

| anels and applying an additional 16" to the total. (CE8PD Power Distri- tition Housing is positioned 8" in from the ends of the powered Panel.)) An additional 3" must be added to the Pass-Through Cable for each ost that the cable passes through.) Subtract 17" from the total length to find the pass through cable ngth required. om the price list, select the CE8CP Pass-Through Cable that matches le calculated length. If the length is between listed sizes, use the next ze up. |
|--|
| ermine the location and circuitry of the receptacles. ach powered Panel has four (4) potential locations for CE8RD Duplex acceptacles – 2 per side. (Exception: 24" wide Panel has only two stential locations – 1 per side.) t each receptacle location there is a choice of four circuit options. elect a circuit option for each location. Circuits one & two are utility rcuits; circuits A & B are dedicated circuits. |
| ai e of t |

Data/Comm

Electrical

This modification allows for the integration of the commonly required "2+2" configuration (2 utility circuits, 2 dedicated circuits) found in the source power of most of today's North American buildings.

This system is rated for connection to:

1. A grounded 120/240V, single phase, 20 A, 60Hz

2. A 120/208V, 3 phase, 20 A, 60Hz branch circuit

EQUIPMENT AMPERAGE


| Calculator | 0.25 |
|--------------------------------|--------------|
| Electric Eraser | 0.50 |
| Pencil Sharpener | |
| Radio | 0.05 |
| Paper Shredder | 4.40 - 13.00 |
| Electric Typewriter | |
| | |
| Personal Computer | 2.00 - 4.00 |
| Video Display Terminal | 0.08 |
| Draft / Letter Quality Printer | |
| Laser Printer | |
| Processor / Disk Unit | 1 00 - 10 00 |


Opening Standard of 1.38 +/- .035 x 2.71 +/- .04

Compile's duplex receptacle openings (1.345 x 2.80) will conform to the ANSI/TIA/EIA Furniture

Since some equipment, such as large copiers, printers, plotters, heaters and coffee makers would occupy most of the circuit capacity, it is recommended that such devices be supplied with the power directly from the wall or building receptacle.

Wiring Schematic

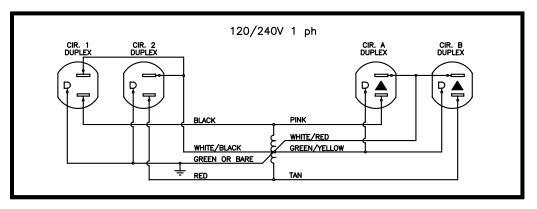

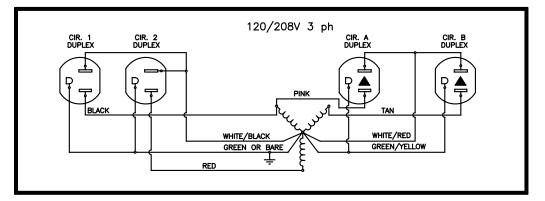

Defining "2 + 2" Wiring Configurations

2 + 2 Configuration (8 wire, 4 circuit)

Two Utility Circuits [Compile's new #1 & #2 circuits] share one neutral wire and one ground wire. (2 hot [circuit] wires + 1 neutral wire^{***} + 1 green ground wire^{*} = 4 wires)

Two Dedicated Circuits [Compile's new "A" & "B" circuits] share one neutral wire and one ground wire. (2 hot [circuit] wires + 1 neutral wire *** + 1 green/yellow ground wire** = 4 wires)

Note:

It is the ground wire that makes the difference between "Utility" and "Dedicated" circuits. Refer to Wiring Schematics found above.

* A Green ground wire is a "system" ground. This means it could be grounded to any piece of metal, including the Panel.


** A Green/Yellow ground wire is isolated, within the wiring conduit, all the way back to the box at the source (building ground).

*** All Neutral Wires are 10 gauge rather than 12 gauge meaning they are larger than normal, allowing greater protection against "noise" or interference on the circuit.

This page provides an exploded view of a sample configuration highlighting each Electrical component required when specifying this configuration.

Components

- A. CE8PD36 Power Distribution Housing Note: 8 wire, 4 circuits, 2+2 configuration
- B. CE8CP17 Flexible Mesh Jumper Cable (connects two panels side by side or separated by a post)
- C. CE8RD Duplex Receptacle
- D. CE8CI-1 "I" Connector
- E. CE8CP Pass-Through Cable Note: Must run in a straight line application only Note: Pass-Through Extension Cable (CE8CPF154) available – extends power capability beyond 208".

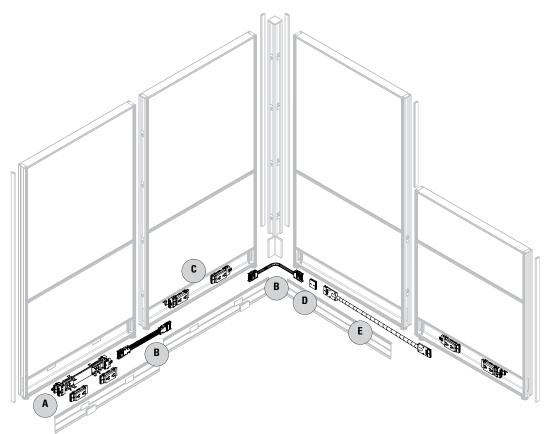

CE8PD - POWER DISTRIBUTION HOUSING

- Power housing is specified per panel size (e.g. CE8PD36 is for use in a 36" panel).
- 8 wire, 4 circuits (4th circuit dedicated).
- Power distribution housing is required for each powered panel, the power distribution housing should equal the width of the panel that it is specified in.
- Provides two duplex receptacle ports per panel side on all panel widths except the 24" wide panel.
- 24" wide panel allows for only one (1) duplex receptacle on one panel side.
- Each power distribution housing supports 15-20 amps.
- Must specify Raceway Cover with Knockouts on panels, where Power Distribution Housings will be utilized.

| DESCRIPTION | PRODUCT CODE | LIST PRICE | DIM H | ENSIONS/INCH W | IES D |
|----------------------------|--|--|----------|---|----------|
| Power Distribution Housing | CE8PD24 CE8PD30 CE8PD36 CE8PD42 CE8PD48 CE8PD60 | 154 209 219 224 241 244 | | 6 1/4 11 1/2 17 1/2 23 1/2 29 1/2 41 1/2 | |

CE8CP17 - FLEXIBLE MESH JUMPER CABLE

• 17" mesh jumper.

• Jumper cable is used to pass through a post or connect two panels together.

| DESCRIPTION | PRODUCT CODE | LIST PRICE | DIMENS H | IONS/INCHE W | S D |
|----------------------------|--------------|------------|-------------|-----------------|--------|
| Flexible Mesh Jumper Cable | CE8CP17 | 120 | | 17 | |

D

CE8CP - PASS THROUGH CABLE

- Flexible metal conduit is used to distribute electrical power through non-powered panels.
- Metal conduit pass through cables should be in used in a straight runs. Metal conduit pass through cables cannot pass through a post.
- Flexible conduit is required to turn a post. This only comes as 17"w. If panels at the posts do not all have power distribution housings, they must be added even if duplexes are not specified.
- To calculate the length of a Pass-Through Cable, add the widths of the non-powered panels separating the powered panels (panels with distribution housing attached).
 To this add 16" (distance from the edge of the panel to the distribution housing x 2).
- Add additional 3" when passing through a corner post. See the Tips at the beginning of the section for more details.

| | DESCRIPTION | PRODUCT CODE | LIST PRICE | DIMENSIONS/INCHES | | |
|-------------|--------------------|--------------|------------|-------------------|--|--|
| | | | | H W D | | |
| M | Pass Through Cable | CE8CP28 | 159 | 28 1/2 | | |
| | | CE8CP40 | 167 | 40 1/2 | | |
| · Junum · · | | CE8CP46 | 172 | 46 1/2 | | |
| A THURLEY C | | CE8CP52 | 178 | 52 1/2 | | |
| · Muu | | CE8CP58 | 187 | 58 1/2 | | |
| | | CE8CP64 | 197 | 64 1/2 | | |
| | | CE8CP70 | 202 | 70 1/2 | | |
| | | CE8CP76 | 205 | 76 1⁄2 | | |
| | | CE8CP82 | 213 | 82 1/2 | | |
| | | CE8CP88 | 219 | 88 1/2 | | |
| | | CE8CP94 | 225 | 94 1/2 | | |
| | | CE8CP100 | 231 | 100 1/2 | | |

CE8CI-1 - "I" CONNECTOR

- Female Female connector connects two Pass-Through Cables.
- Connects 17" Flexible Jumper Cable or ceiling feeds to pass through cables.

| DESCRIPTION | PRODUCT CODE | LIST PRICE | DIMENSIONS/INCHES | | |
|---------------|--------------|------------|-------------------|---|---|
| | | | Н | W | D |
| "I" Connector | CE8CI-1 | 88 | | | |

ELECTRICAL

CE8RD - DUPLEX RECEPTACLE

- Up to 3 receptacles per circuit
- Up to 6 receptacles per circuit (24 per infeed), not to exceed total of 15 Amps per circuit.
- Duplex Receptacles standard in Black (BLK).

- CE8RD1 = Circuit #1 (utility circuit)
- CE8RD2 = Circuit #2 (utility circuit)
- CE8RDA = Circuit A (dedicated)
- CE8RDB = Circuit B (dedicated)
- CE8RD1 and CE8RD2 (#1 and #2 share common ground)
- CE8RDA and CE8RDB (A and B share common ground)

| DESCRIPTION | PRODUCT CODE | LIST PRICE | DIMI H | ENSIONS/INC W | CHES D |
|-------------------|--------------------------------------|----------------------------|-----------|------------------|-----------|
| Duplex Receptacle | CE8RD1 CE8RD2 CE8RDA CE8RDB | 33 33 33 33 33 | | | |

CE8RDXCA - CALIFORNIA CONTROLLED DUPLEX RECEPTACLE

- California Title 24 meets federal and LEED certification guidelines
- Allows circuit to be controlled or switched off when utility is not in use.
- Duplex receptacles are rated for 15 Amps.
- CE8RD1CA = Circuit #1 (utility circuit)
- CE8RD2CA = Circuit #2 (utility circuit)
- CE8RDACA = Circuit A (dedicated)
- CE8RDBCA = Circuit B (dedicated)

NOTE:

- CE8RD1CA and CE8RD2CA (#1 and #2 share common ground)
- CE8RDACA and CE8RDBCA (A and B share common ground)
- Up to 6 receptacles per circuit (24 per infeed), not to exceed total of 15 Amps per circuit.
- Available in BLK finish only.

| DESCRIPTION | PRODUCT CODE | LIST PRICE | DIMENSIONS/INCHES | | |
|-------------------|--------------|------------|-------------------|-------|-------|
| | | | Н | W | D |
| Duplex Receptacle | CE8RD1CA | 38 | 2 | 4 5⁄8 | 1 1/4 |
| | CE8RD2CA | 38 | 2 | 4 5⁄8 | 1 1/4 |
| | CE8RDACA | 38 | 2 | 4 5⁄8 | 1 1/4 |
| | CE8RDBCA | 38 | 2 | 4 5⁄8 | 1 1/4 |

CE8FR1 - REVERSIBLE FLOOR POWER ENTRY

- Takes the place of a duplex receptacle by snapping into the base power way.
- Includes 72" long flexible metal conduit.
- Must be hard wired to source power by a licensed electrician.
- Diameter is 0.85"

CE8FR2 - REVERSIBLE FLOOR POWER ENTRY

- Takes the place of a duplex receptacle by snapping into the base power way.
- Includes 144" long flexible metal conduit.
- Must be hard wired to source power by a licensed electrician.

· Must be hard wired to source power by a licensed electrician.

| DESCRIPTION | PRODUCT CODE | LIST PRICE | DIM H | ENSIONS/ING W | CHES D |
|------------------------------|------------------|------------|----------|------------------|-----------|
| Reversible Floor Power Entry | CE8FR1 CE8FR2 | 347 447 | | 72 72 | |

CE8F - FLOOR POWER ENTRY

- Snaps in end of power distribution housing.
- Includes flexible vinyl conduit.

DESCRIPTION PRODUCT CODE LIST PRICE DIMENSIONS/INCHES H Reversible Floor Power Entry CE8F1P CE8F2P 357 461 72 144

• Diameter is 0.85"

CMEB01 - ELECTRICAL BOX - CHICAGO

- Can be retrofitted in any size of panel at the receptacle location.
- 2 per panel ,except 24" panel only one

Note: A licensed electrician must provide hardware connection with the junction box.

Gives access from one side only at each location.Customer to supply conduit, wiring, receptacle, and face plate.

| DESCRIPTION | PRODUCT CODE | LIST PRICE | DIMENSIONS/INCHES | | CHES |
|--------------------------|--------------|------------|-------------------|---|------|
| | | | Н | W | D |
| Electrical Box - Chicago | CMEB01 | 101 | | | |



CMEB02NY - ELECTRICAL BOX - NEW YORK

- Shipped assembled.
- Comes with pig tail electric.
- Use with 30" wide Panel of larger

- Post extension cable capacities: without electric, 30 with electric, 20
- Includes ceiling bezel and screws.

| DESCRIPTION | PRODUCT CODE | LIST PRICE | DIMENSIONS/INCHES H W D | | HES |
|---------------------------|--------------|------------|----------------------------|--|-----|
| Electrical Box - New York | CMEB02NY | 444 | | | |

CEPEXX - POST EXTENSION

- Same profile as post.
- Includes two post extension brackets, four screws and four trim inserts.
- Includes ceiling bezel and screws.

| | DESCRIPTION | PRODUCT CODE | LIST PRICE | DIME H | ENSIONS/INCHES W | D |
|----|----------------|------------------|------------|-----------|---------------------|---|
| Î. | Post Extension | CEPE64 CEPE82 | 192 241 | 64 82 | | |

CE8ECX - CEILING FEED

- Snaps into the end of a Power Distribution Housing.
- Flexible metal conduit extends into the ceiling through a corner post and post extension.
- Must be hard wired to source power by a licensed electrician.
- 4" junction box included.
- Post extension ordered separately

| | DESCRIPTION | PRODUCT CODE | LIST PRICE | DIME H | ENSIONS/INCHES W | D |
|------|--------------|--------------|------------|-----------|---------------------|---|
| Here | Ceiling Feed | CE8EC2 | 469 | 144 | | |

CMECC - CABLE COVER

- Attaches to panels vertically between modules to provide enclosures for power or data cords.
 Available in Steel (STL), Black (BLK), Nevada (NEV) only.
- Available in 21" and 36" lengths, 6 per pack.

| | DESCRIPTION | PRODUCT CODE | LIST PRICE | DIM | DIMENSIONS/INC | | |
|----|-------------|--------------|------------|-----|----------------|---|--|
| | | | | Н | W | D | |
| 01 | Cord Cover | CMECC21 | 32 | 21 | 0.5 | 1 | |
| | | CMECC36 | 50 | 36 | 0.5 | 1 | |
| | | | | | | | |

CMLEDES - STARTER LED TASK LIGHT

- Undercabinet slim profile LED linear light fixture with lens and On/Off switch.
- May be used as stand-alone or extended with add-on section below (CMLEDES_DSC).
- Includes magnet mounting bracket with optional adhesive metal plate.
- Light enclosure in clear anodizing finish. Color temperature cool white 4000K.
- Lifespan rated 30,000 hours.
- Plug-in power supply with 72" cord length plus 78" DC cable.

| | DESCRIPTION | PRODUCT CODE | LIST PRICE | DIMENSIONS/INCHES | | |
|--------|----------------|--------------|------------|-------------------|------|---|
| | | | | Н | W | D |
| | Led Task Light | CMLEDES24 | 277 | 1 | 22.9 | 1 |
| | | CMLEDES30 | 308 | 1 | 33.5 | 1 |
| | | CMLEDES36 | 318 | 1 | 45.5 | 1 |
| Se / V | | | | | | |

CMLEDES - ADD-ON LED TASK LIGHT

- Undercabinet slim profile LED linear add-on light fixture with lens.
- Daisy chain unit with 39" linking cable, no power supply.
- Add-on units can only be linked up to a total of 48 watts per power supply; this is
 equivalent to 10 feet of nominal length of light per power supply.
- Includes magnet mounting bracket with optional adhesive metal plate. Light enclosure in clear anodizing finish. Color temperature cool white 4000K. Lifespan rated 30,000 hours.


| | DESCRIPTION | PRODUCT CODE | LIST PRICE | DIM H | ENSIONS/IN W | CHES D |
|----|----------------|------------------------------|------------|----------|-----------------|-----------|
| | Led Task Light | CMLEDES24DSC CMLEDES36DSC | 227 267 | 1 1 | 24 36 | 39 39 |
| 50 | | CMLEDES48DSC | 303 | 1 | 48 | 39 |

CMLEDESOS - OCCUPANCY SENSOR

• Inline add-on controller for dimming and occupancy sensor.

```
• Sensor bypass switch.
```


| DESCRIPTION | PRODUCT CODE | LIST PRICE | DIMENSIONS/INCHES | | HES |
|------------------|--------------|------------|-------------------|-----|-----|
| | | | Н | W | D |
| Occupancy Sensor | CMLEDESOS | 114 | 6 | 2.4 | 2 |




worksurfaces

The information listed below provides you with basic features of Compile Worksurfaces.

- Compile thermally fused Worksurfaces are 1" thick and are finished with 3 mm PVC edging on all sides.
- Worksurfaces are predrilled to enable proper alignment with worksurface supports.
- Standard laminate offerings are available in thermally-fused (T). See laminate listings for details.
- Wood grain laminates on corner Worksurfaces up to 42" available in laminate run diagonally for an upcharge. Otherwise, standard horizontal application of laminate will be used.
- Most wood grain laminate Worksurfaces will have matching woodgrain trim unless specified otherwise.
- Depth of the Worksurface scoops are 1 1/8" when measured from the Panel the Worksurface is attached to.
- All Worksurfaces require support items. These are priced separately within this section.
- Grain Direction for Worksurfaces are as follows:

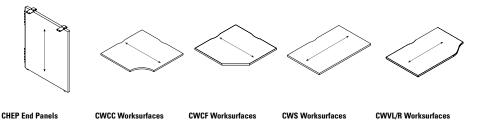

• Communication and electrical wires are routed through a cable scoop located at the back of the Worksurface. When specifying a Straight Worksurface (CWS) or a Curvilinear Worksurface (CWVL), note that the number of cable scoops depends upon the width of the Worksurface. All other Worksurface shapes have one scoop on Panel edges.

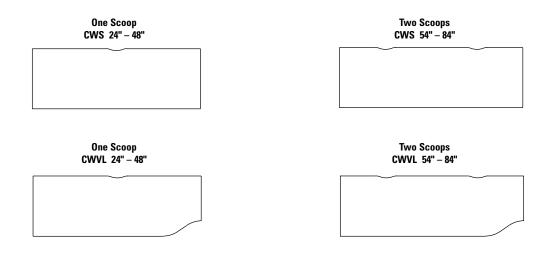


WORKSURFACES

This page provides a three dimensional view of a sample configuration highlighting each Worksurface component required when specifying this configuration.

Components

- A. CWVL2436 Curvilinear Worksurface Left
 Note: When deepest end equals 24", opposite depth is 18" When deepest end equals 30", opposite depth is 24"
- B. CWCC3618 Corner Curved Worksurface
- **C.** CWVR2436 Curvilinear Worksurface Right

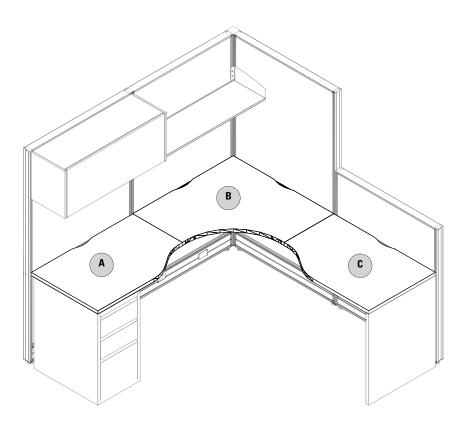

CWS - RECTANGULAR WORKSURFACES

- All tops are thermally fused 1" thick with pilot holes to enable proper alignment with worksurface supports. Wood screws must be used.
- Compile worksurfaces feature a 3mm edge.

- Width and depth dimensions listed include a nominal measurement (3/8") to account for wire management between the worksurface and adjoining panel.
- All surfaces over 48" will have two scoops, all others have one.
- Support hardware must be ordered separately. See the listings in this section.
- Worksurfaces greater than 48" wide require additional structural support.

| | DESCRIPTION | PRODUCT CODE | LIST PRICE | | ENSIONS/INCHES |
|-----|-------------------------------------|--------------|------------|----|----------------|
| | | | | D | W |
| W | Rectangular Worksurfaces - 24" Deep | CWS2424P | 139 | 24 | 24 |
| VV | | CWS2430P | 149 | 24 | 30 |
| | | CWS2436P | 167 | 24 | 36 |
| | | CWS2442P | 214 | 24 | 42 |
| | | CWS2448P | 258 | 24 | 48 |
| D 💛 | | CWS2454P | 301 | 24 | 54 |
| | | CWS2460P | 339 | 24 | 60 |
| | | CWS2466P | 354 | 24 | 66 |
| | | CWS2472P | 367 | 24 | 72 |
| | | CWS2478P | 590 | 24 | 78 |
| | | CWS2484P | 597 | 24 | 84 |
| | | CWS2490P | 626 | 24 | 90 |
| | | CWS2496P | 668 | 24 | 96 |
| | Rectangular Worksurfaces - 30" Deep | CWS3024P | 163 | 30 | 24 |
| | | CWS3030P | 173 | 30 | 30 |
| | | CWS3036P | 205 | 30 | 36 |
| | | CWS3042P | 288 | 30 | 42 |
| | | CWS3048P | 301 | 30 | 48 |
| | | CWS3054P | 330 | 30 | 54 |
| | | CWS3060P | 354 | 30 | 60 |
| | | CWS3066P | 366 | 30 | 66 |
| | | CWS3072P | 388 | 30 | 72 |
| | | CWS3078P | 734 | 30 | 78 |
| | | CWS3084P | 748 | 30 | 84 |

CWSNSC - STRAIGHT WORKSURFACE NO SCOOP

- There is no scoop on this worksurface.
- Worksurface depth is exact, not nominal.
- Support hardware must be ordered separately. See listing in this section of the price book.
- For use with Bridges II or Princeton style legs.
- Surfaces not available in HPW.
- Worksurfaces greater than 48" wide require additional structural support.

| | | PRODUCT CODE | LIST PRICE | DINI | ENSIONS/INCHES |
|------------|---------------------------------|--------------|------------|------|----------------|
| | | | | D | W |
| Straight W | orksurface No Scoops - 24" Deep | CWS2424NSC | 139 | 24 | 24 |
| W | | CWS2430NSC | 149 | 24 | 30 |
| | | CWS2436NSC | 167 | 24 | 36 |
| | | CWS2442NSC | 214 | 24 | 42 |
| | | CWS2448NSC | 258 | 24 | 48 |
| D | | CWS2454NSC | 301 | 24 | 54 |
| | | CWS2460NSC | 339 | 24 | 60 |
| | | CWS2466NSC | 354 | 24 | 66 |
| | | CWS2472NSC | 367 | 24 | 72 |
| | | CWS2478NSC | 590 | 24 | 78 |
| | | CWS2484NSC | 597 | 24 | 84 |
| | | CWS2490NSC | 702 | 24 | 90 |
| | | CWS2496NSC | 668 | 24 | 96 |
| Straight W | orksurface No Scoops - 30" Deep | CWS3024NSC | 163 | 30 | 24 |
| | | CWS3030NSC | 173 | 30 | 30 |
| | | CWS3036NSC | 205 | 30 | 36 |
| | | CWS3042NSC | 288 | 30 | 42 |
| | | CWS3048NSC | 301 | 30 | 48 |
| | | CWS3054MSC | 330 | 30 | 54 |
| | | CWS3060NSC | 354 | 30 | 60 |
| | | CWS3066NSC | 366 | 30 | 66 |
| | | CWS3072NSC | 388 | 30 | 72 |
| | | CWS3078NSC | 734 | 30 | 78 |
| | | CWS3084NSC | 748 | 30 | 84 |

CWSNSCP - RECTANGULAR WORKSURFACE, NO SCOOPS FOR HEIGHT ADJUSTABLE TABLES

- There is no scoop on this work surface.
- Worksurface depth is exact, not nominal.

- For use with Height Adjustable Tables
- Surfaces not available in HPW.
- Support hardware must be ordered separately. See listing in this section of the price book.

| | DESCRIPTION | PRODUCT CODE | LIST PRICE | DIM | ENSIONS/IN | CHES |
|--------|-----------------------------------|--------------|------------|-----|------------|------|
| | | | | Н | D | W |
| | Rectangular Worksurface No Scoops | CWS2346NSCP | 258 | 1 | 23 | 46 |
| \sim | for Height Adjustable Tables | CWS2352NSCP | 301 | 1 | 23 | 52 |
| W | | CWS2358NSCP | 339 | 1 | 23 | 58 |
| | | CWS2364NSCP | 354 | 1 | 23 | 64 |
| | | CWS2370NSCP | 367 | 1 | 23 | 70 |
| D | | CWS2946NSCP | 301 | 1 | 29 | 46 |
| | | CWS2952NSCP | 330 | 1 | 29 | 52 |
| | | CWS2958NSCP | 354 | 1 | 29 | 58 |
| | | CWS2964NSCP | 366 | 1 | 29 | 64 |
| | | CWS2970NSCP | 388 | 1 | 29 | 70 |

CWSWNSC - WEDGE WORKSURFACE NO SCOOP

- There is no scoop on this worksurface.
- · Worksurface depth is exact, not nominal.
- Support hardware must be ordered separately. See listing in this section of the price book.
- For use with Bridges II or Princeton style legs.
- Surfaces not available in HPW.
- Worksurfaces greater than 48" wide require additional structural support.

| | DESCRIPTION | PRODUCT CODE | LIST PRICE | DIME | ENSIONS/ING | CHES | |
|------------|--|---------------|------------|------|-------------|------|--|
| | | | | D1 | D2 | W | |
| D 2 | Straight Wedge Worksurface No Scoops - Left | CWSW241848NSC | 359 | 24 | 18 | 48 | |
| W | | CWSW241854NSC | 405 | 24 | 18 | 54 | |
| | | CWSW241860NSC | 446 | 24 | 18 | 36 | |
| | | CWSW241866NSC | 494 | 24 | 18 | 42 | |
| | | CWSW241872NSC | 538 | 24 | 18 | 48 | |
| D1 | | CWSW302448NSC | 446 | 30 | 24 | 60 | |
| | | CWSW302454NSC | 504 | 30 | 24 | 66 | |
| | | CWSW302460NSC | 560 | 30 | 24 | 72 | |
| | | CWSW302466NSC | 615 | 30 | 24 | 78 | |
| | | CWSW302472NSC | 674 | 30 | 24 | 84 | |
| W D1 | Straight Wedge Worksurface No Scoops - Right | CWSW182448NSC | 359 | 24 | 18 | 24 | |
| W | | CWSW182454NSC | 405 | 24 | 18 | 30 | |
| | | CWSW182460NSC | 446 | 24 | 18 | 36 | |
| | | CWSW182466NSC | 494 | 24 | 18 | 42 | |
| D2 | | CWSW182472NSC | 538 | 24 | 18 | 48 | |
| | | CWSW243048NSC | 446 | 30 | 24 | 60 | |
| | | CWSW243054NSC | 504 | 30 | 24 | 66 | |
| | | CWSW243060NSC | 560 | 30 | 24 | 72 | |
| | | CWSW243066NSC | 615 | 30 | 24 | 78 | |
| | | CWSW243072NSC | 674 | 30 | 24 | 84 | |
| | | | | | | | |

CWSP - RECTANGULAR WORKSURFACES - SPAN A POST

- All tops are thermally fused 1" thick with pilot holes to enable proper alignment with worksurface supports. Wood screws must be used.
- Note: Width and depth dimensions listed include a nominal measurement (38") to account for wire management between the worksurface and adjoining panel.

• Compile worksurfaces feature a 3mm edge.

• Support hardware must be ordered separately. See the listings in this section.

| | DESCRIPTION | PRODUCT CODE | LIST PRICE | DIME D | ENSIONS/INCHES W | |
|--------|-------------------------------------|--------------|------------|-----------|---------------------|--|
| | Rectangular Worksurfaces - 24" Deep | CWSP2426P | 167 | 24 | 26 | |
| W | Span a Post | CWSP2432P | 201 | 24 | 32 | |
| | Span a rust | CWSP2438P | 234 | 24 | 38 | |
| | | CWSP2444P | 264 | 24 | 44 | |
| \leq | | CWSP2450P | 204 | 24 | 44 50 | |
| D | | | 330 | | | |
| D | | CWSP2456P | | 24 | 56 | |
| | | CWSP2462P | 437 | 24 | 62 | |
| | | CWSP2468P | 476 | 24 | 68 | |
| | | CWSP2474P | 517 | 24 | 74 | |
| | | CWSP2480P | 556 | 24 | 80 | |
| | | CWSP2486P | 634 | 24 | 86 | |
| | Rectangular Worksurfaces - 30" Deep | CWSP3026P | 209 | 30 | 26 | |
| | Span a Post | CWSP3032P | 250 | 30 | 32 | |
| | • | CWSP3038P | 296 | 30 | 38 | |
| | | CWSP3044P | 330 | 30 | 44 | |
| | | CWSP3050P | 373 | 30 | 50 | |
| | | CWSP3056P | 414 | 30 | 56 | |
| | | CWSP3062P | 546 | 30 | 62 | |
| | | CWSP3068P | 594 | 30 | 68 | |
| | | CWSP3074P | 646 | 30 | 74 | |
| | | CWSP3080P | 693 | 30 | 80 | |
| | | CWSF3086P | 791 | 30 | 86 | |
| | | 6003530806 | /31 | 30 | OU | |

- CWVR CURVILINEAR WORKSURFACES RIGHT
 All tops are thermally fused 1" thick with pilot holes to enable proper alignment with worksurface supports. Wood screws must be used.
- Compile worksurfaces feature a 3mm edge. ٠

- Support hardware must be ordered separately. See the listings in this section.
- Note: Width and depth dimensions listed include a nominal measurement (3/8") to account for wire management between the worksurface and adjoining panel.
- When deepest end equals 24". the opposite depth is 18". When deepest end • Worksurfaces greater than 48" wide require additional structural support. equals 30", the opposite depth is 24"

| | DESCRIPTION | PRODUCT CODE | LIST PRICE | DIMI | ENSIONS/INCHES | |
|-------------------------|-------------------------------------|--------------|------------|------|----------------|--|
| | | | | D | W | |
| | Curvilinear Worksurfaces - 24" Deep | CWVR2424P | 179 | 24 | 24 | |
| W | | CWVR2430P | 185 | 24 | 30 | |
| $\langle \cdot \rangle$ | | CWVR2436P | 223 | 24 | 36 | |
| | | CWVR2442P | 258 | 24 | 42 | |
| | | CWVR2448P | 295 | 24 | 48 | |
| | | CWVR2454P | 330 | 24 | 54 | |
| | | CWVR2460P | 358 | 24 | 60 | |
| | | CWVR2466P | 396 | 24 | 66 | |
| | | CWVR2472P | 426 | 24 | 72 | |
| | | CWVR2478P | 590 | 24 | 78 | |
| | | CWVR2484P | 597 | 24 | 84 | |
| | Curvilinear Worksurfaces - 30" Deep | CWVR3024P | 185 | 30 | 24 | |
| | | CWVR3030P | 196 | 30 | 30 | |
| | | CWVR3036P | 231 | 30 | 36 | |
| | | CWVR3042P | 317 | 30 | 42 | |
| | | CWVR3048P | 330 | 30 | 48 | |
| | | CWVR3054P | 366 | 30 | 54 | |
| | | CWVR3060P | 396 | 30 | 60 | |
| | | CWVR3066P | 426 | 30 | 66 | |
| | | CWVR3072P | 453 | 30 | 72 | |
| | | CWVR3078P | 734 | 30 | 78 | |
| | | CWVR3084P | 748 | 30 | 84 | |

CWVL - CURVILINEAR WORKSURFACES - LEFT

• All tops are thermally fused 1" thick with pilot holes to enable proper alignment with worksurface supports. Wood screws must be used.

equals 30", the opposite depth is 24"

• Support hardware must be ordered separately. See the listings in this section.

- Compile worksurfaces feature a 3mm edge.
- ٠ When deepest end equals 24". the opposite depth is 18". When deepest end
- Note: Width and depth dimensions listed include a nominal measurement (3/8")
- to account for wire management between the worksurface and adjoining panel.

| | DESCRIPTION | PRODUCT CODE | LIST PRICE | DIMI D | ENSIONS/INCHES W |
|------------|-------------------------------------|------------------------|------------|-----------|---------------------|
| | Curvilinear Worksurfaces - 24" Deep | CWVL2424P | 179 | 24 | 24 |
| D V | Guivillieal Worksurfaces - 24 Deep | CWVL2424P CWVL2430P | 185 | 24 | 30 |
| ~ ~ | | | 223 | 24 24 | |
| $\langle $ | | CWVL2436P | | | 36 |
| | | CWVL2442P | 258 | 24 | 42 |
| | | CWVL2448P | 295 | 24 | 48 |
| | | CWVL2454P | 330 | 24 | 54 |
| | | CWVL2460P | 358 | 24 | 60 |
| | | CWVL2466P | 396 | 24 | 66 |
| | | CWVL2472P | 426 | 24 | 72 |
| | | CWVL2478P | 590 | 24 | 78 |
| | | CWVL2484P | 597 | 24 | 84 |
| | Curvilinear Worksurfaces - 30" Deep | CWVL3024P | 185 | 30 | 24 |
| | | CWVL3030P | 196 | 30 | 30 |
| | | CWVL3036P | 231 | 30 | 36 |
| | | CWVL3042P | 317 | 30 | 42 |
| | | CWVL3048P | 330 | 30 | 48 |
| | | CWVL3054P | 366 | 30 | 54 |
| | | CWVL3060P | 396 | 30 | 60 |
| | | CWVL3066P | 426 | 30 | 66 |
| | | CWVL3072P | 453 | 30 | 72 |
| | | CWVL3078P | 734 | 30 | 72 |
| | | CWVL3084P | 748 | 30 | 84 |

CWCC - CORNER CURVED WORKSURFACES

- All tops are thermally fused 1" thick with pilot holes to enable proper alignment with worksurface supports. Wood screws must be used.
- Compile worksurfaces feature a 3mm edge.
- Support hardware must be ordered separately. See the listings in this section.
- Note: Width and depth dimensions listed include a nominal measurement (3/8") to account for wire management between the worksurface and adjoining panel.
- Note: Wood grain laminates do not run diagonally on corner worksurfaces.
- Worksurfaces greater than 48" wide require additional structural support.

| | DESCRIPTION | PRODUCT CODE | LIST PRICE | DIMENS D | SIONS/INCHES W |
|---|----------------------------------|------------------------|------------|-------------|-------------------|
| W | Corner Curved Worksurfaces - 36" | CWCC3618P CWCC3624P | 466 511 | 18 24 | 36 36 |
| | Corner Curved Worksurfaces - 42" | CWCC4224P CWCC4230P | 689 750 | 24 30 | 42 42 |
| | Corner Curved Worksurfaces - 48" | CWCC4824P CWCC4830P | 806 844 | 24 30 | 48 48 |

CWCF - FIVE SIDED WORKSURFACES

- All tops are thermally fused 1" thick with pilot holes to enable proper alignment with worksurface supports. Wood screws must be used.
- Compile worksurfaces feature a 3mm edge.

• Note: Width and depth dimensions listed include a nominal measurement (3/8") to account for wire management between the worksurface and adjoining panel.

24

42

• Note: Wood grain laminates do not run diagonally on corner worksurfaces.

689

• Support hardware must be ordered separately. See the listings in this section.

Five Sided Worksurface - 42"

| | DESCRIPTION | PRODUCT CODE | LIST PRICE | DIMENS D | IONS/INCHES W |
|--------|------------------------------|------------------------|------------|-------------|------------------|
| N D | Five Sided Worksurface - 36" | CWCF3618P CWCF3624P | 461 511 | 18 24 | 36 36 |

| | CWCF4230P | 750 | 30 | 42 | |
|------------------------------|-----------|-----|----|----|--|
| | | | | | |
| | | | | | |
| | | | | | |
| | | | | | |
| Five Sided Worksurface - 48" | CWCF4824P | 806 | 24 | 48 | |
| | CWCF4830P | 844 | 30 | 48 | |
| | | | | | |

CWCF4224P

CWC6 - CURVED CORNER WORKSURFACE FOR 60° POST

- All tops are thermally fused 1" thick with pilot holes to enable proper alignment with worksurface supports. Wood screws must be used.
- Compile worksurfaces feature a 3mm edge.

- Note: Width and depth dimensions listed include a nominal measurement (38") to account for wire management between the worksurface and adjoining panel.
- Note: Wood grain laminates do not run diagonally on corner worksurfaces.
- Support hardware must be ordered separately. See the listings in this section.

| nardware must be ordered separately. See the listings in this section | n. • Worksurfaces | greater than 48" wide | require additi | onal structural support. |
|---|-------------------|-----------------------|----------------|--------------------------|
| DESCRIPTION | PRODUCT CODE | LIST PRICE TF | DIMI D | ENSIONS/INCHES W |
| Curved Corner Worksurface for 60° Post - 24" | CWC62424P | 435 | 24 | 24 |
| | CWC62430P | 773 | 24 | 30 |
| | CWC62436P | 868 | 24 | 36 |
| | CWC62442P | 1327 | 24 | 42 |
| | CWC62448P | 1447 | 24 | 48 |
| Curved Corner Worksurface for 60° Post - 30" | CWC63024P | 435 | 30 | 24 |
| | CWC63030P | 773 | 30 | 30 |
| | CWC63036P | 868 | 30 | 36 |
| | CWC63042P | 1327 | 30 | 42 |
| | CWC63048P | 1447 | 30 | 48 |

CWCEL - EXTENDED CURVED CORNER - LEFT

- There are three cable scoops on this worksurface
- Support hardware must be ordered separately. See listing in this section of the price list
- Note: Wood Grain Laminates do not run diagonally on Extended Curved Corners

| | DESCRIPTION | PRODUCT CODE | LIST PRICE | DIM | ENSIONS/ING | CHES |
|--------------|------------------------------------|--------------|------------|-----|-------------|------|
| | | | | D1 | D2 | W |
| ^ B 4 | Extended Curved Corner - 36" x 24" | CWCEL362448P | 630 | 36 | 24 | 48 |
| W D1 | | CWCEL362460P | 687 | 36 | 24 | 60 |
| | | CWCEL362466P | 754 | 36 | 24 | 66 |
| | | CWCEL362472P | 834 | 36 | 24 | 72 |
| D2 | | CWCEL362478P | 891 | 36 | 24 | 78 |
| D2 D2 | | CWCEL362484P | 959 | 36 | 24 | 84 |
| | Extended Curved Corner - 42" x 24" | CWCEL422460P | 723 | 42 | 24 | 60 |
| | | CWCEL422466P | 792 | 42 | 24 | 66 |
| | | CWCEL422472P | 879 | 42 | 24 | 72 |
| | | CWCEL422478P | 938 | 42 | 24 | 78 |
| | | CWCEL422484P | 1012 | 42 | 24 | 84 |
| | Extended Curved Corner - 42" x 30" | CWCEL423060P | 813 | 42 | 30 | 60 |
| | | CWCEL423066P | 891 | 42 | 30 | 66 |
| | | CWCEL423072P | 975 | 42 | 30 | 72 |
| | | CWCEL423078P | 1044 | 42 | 30 | 78 |
| | | CWCEL423084P | 1113 | 42 | 30 | 84 |
| | Extended Curved Corner - 48" x 24" | CWCEL482460P | 855 | 48 | 24 | 60 |
| | | CWCEL482466P | 924 | 48 | 24 | 66 |
| | | CWCEL482472P | 992 | 48 | 24 | 72 |
| | | CWCEL482478P | 1092 | 48 | 24 | 78 |
| | | CWCEL482484P | 1135 | 48 | 24 | 84 |
| | Extended Curved Corner - 48" x 30" | CWCEL483060P | 905 | 48 | 30 | 60 |
| | | CWCEL483066P | 985 | 48 | 30 | 66 |
| | | CWCEL483072P | 1069 | 48 | 30 | 72 |
| | | CWCEL483078P | 1150 | 48 | 30 | 78 |
| | | CWCEL483084P | 1201 | 48 | 30 | 84 |

CWCER - EXTENDED CURVED CORNER - RIGHT

• There are three cable scoops on this worksurface

- Worksurfaces greater than 48" wide require additional structural support.
- Support hardware must be ordered separately. See listing in this section of the price list
- Note: Wood Grain Laminates do not run diagonally on Extended Curved Corners

| | DESCRIPTION | PRODUCT CODE | LIST PRICE | | ENSIONS/IN | |
|--------------|------------------------------------|--------------|------------|----|------------|----|
| | | | | D1 | D2 | W |
| D 2 | Extended Curved Corner - 36" x 24" | CWCER362448P | 630 | 36 | 24 | 48 |
| W S | | CWCER362460P | 687 | 36 | 24 | 60 |
| ~ / | | CWCER362466P | 754 | 36 | 24 | 66 |
| < (| | CWCER362472P | 834 | 36 | 24 | 72 |
| \sim | | CWCER362478P | 891 | 36 | 24 | 78 |
| D1 <u>D2</u> | | CWCER362484P | 959 | 36 | 24 | 84 |
| | Extended Curved Corner - 42" x 24" | CWCER422460P | 723 | 42 | 24 | 60 |
| | | CWCER422466P | 792 | 42 | 24 | 66 |
| | | CWCER422472P | 879 | 42 | 24 | 72 |
| | | CWCER422478P | 938 | 42 | 24 | 78 |
| | | CWCER422484P | 1012 | 42 | 24 | 84 |
| | Extended Curved Corner - 42" x 30" | CWCER423060P | 813 | 42 | 30 | 60 |
| | | CWCER423066P | 891 | 42 | 30 | 66 |
| | | CWCER423072P | 975 | 42 | 30 | 72 |
| | | CWCER423078P | 1044 | 42 | 30 | 78 |
| | | CWCER423084P | 1113 | 42 | 30 | 84 |
| | Extended Curved Corner - 48" x 24" | CWCER482460P | 855 | 48 | 24 | 60 |
| | | CWCER482466P | 924 | 48 | 24 | 66 |
| | | CWCER482472P | 992 | 48 | 24 | 72 |
| | | CWCER482478P | 1092 | 48 | 24 | 78 |
| | | CWCER482484P | 1135 | 48 | 24 | 84 |
| | Extended Curved Corner - 48" x 30" | CWCER483060P | 905 | 48 | 30 | 60 |
| | | CWCER483066P | 985 | 48 | 30 | 66 |
| | | CWCER483072P | 1069 | 48 | 30 | 72 |
| | | CWCER483078P | 1150 | 48 | 30 | 78 |
| | | CWCER483084P | 1201 | 48 | 30 | 84 |

CWD - "D" WORKSURFACE

- Support hardware must be ordered separately. See listing in this section of the price list
- Monoleg is included

| | DESCRIPTION | PRODUCT CODE | LIST PRICE | DIM D | ENSIONS/INCHES W | |
|------------|-----------------------|--|--------------------------|----------------------|----------------------|--|
| \bigcirc | "D" Worksurface - 24" | CWD2442P CWD2448P CWD2460P CWD2472P | 516 530 556 594 | 24 24 24 24 | 42 48 60 72 | |
| U | "D" Worksurface - 30" | CWD3042P CWD3048P CWD3060P CWD3072P | 559 566 594 659 | 30 30 30 30 | 42 48 60 72 | |

CWH - HATCHET WORKSURFACE (LEFT SHOWN)

- Cable scoop is in the center of the 36" wide edge.
- Support hardware must be ordered separately. See listing in this section of the price list
- Must be specified either left or right handed.
- Note: Wood Grain Laminates do not run diagonally on Hatchet Corners
- Worksurfaces greater than 48" wide require additional structural support.

Monoleg is included

| DESCRIPTION | PRODUCT CODE | LIST PRICE | DIME D1 | ENSIONS/ING D2 | CHES W |
|-----------------------------|--------------|------------|------------|-------------------|-----------|
| Hatchet Worksurface - Left | CWHL3672P | 1133 | 36 | 30 | 72 |
| Hatchet Worksurface - Right | CWHR3672P | 1133 | 36 | 30 | 72 |

Right Shown

CWSW - STRAIGHT WEDGE WORKSURFACES

- Support hardware must be ordered separately. See the listings in this section.
- Must be specified either left or right handed.

| | DESCRIPTION | PRODUCT CODE | LIST PRICE | DIMI D1 | ENSIONS/IN D2 | CHES W |
|-----------|------------------------------------|--------------|------------|------------|------------------|-----------|
| | | | | וע | DZ | VV |
| Do | Straight Wedge Worksurface - Left | CWSW241848P | 359 | 24 | 18 | 48 |
| D2 | | CWSW241854P | 405 | 24 | 18 | 54 |
| | | CWSW241860P | 446 | 24 | 18 | 60 |
| | | CWSW241866P | 494 | 24 | 18 | 66 |
| D1 W | | CWSW241872P | 538 | 24 | 18 | 72 |
| | | CWSW302448P | 446 | 30 | 24 | 48 |
| | | CWSW302454P | 504 | 30 | 24 | 54 |
| | | CWSW302460P | 560 | 30 | 24 | 60 |
| | | CWSW302466P | 615 | 30 | 24 | 66 |
| | | CWSW302472P | 674 | 30 | 24 | 72 |
| | Straight Wedge Worksurface - Right | CWSW182448P | 359 | 18 | 24 | 48 |
| | | CWSW182454P | 405 | 18 | 24 | 54 |
| | | CWSW182460P | 446 | 18 | 24 | 60 |
| | | CWSW182466P | 494 | 18 | 24 | 66 |
| | | CWSW182472P | 538 | 18 | 24 | 72 |
| | | CWSW243048P | 446 | 24 | 30 | 48 |
| | | CWSW243054P | 504 | 24 | 30 | 54 |
| | | CWSW243060P | 560 | 24 | 30 | 60 |
| | | CWSW243066P | 615 | 24 | 30 | 66 |
| | | CWSW243072P | 674 | 24 | 30 | 72 |

CWOR - QUARTER ROUND PANEL WORKSURFACE

- The worksurface edge running along the panel is a slightly different length than that of the worksurface end, causing the surface to be handed.
- Left hand surface shown.
- Support hardware must be ordered separately. See the listings in this section.

| DESCRIPTION | PRODUCT CODE | LIST PRICE | DIMENSIONS/INCHES D W | | |
|---|------------------------|------------|--------------------------|----------|--|
| Quarter Round Panel Worksurface - Left | CWQRL2424 CWQRL3030 | 214 283 | 24 30 | 24 30 | |
| Quarter Round Panel Worksurface - Right | CWQRR2424 CWQRR3030 | 214 283 | 24 30 | 24 30 | |

CWORC - QUARTER ROUND PANEL CORNER WORKSURFACE

- Wraps around a 90° corner post.
- Support hardware must be ordered separately. See the listing in this section.
- Worksurfaces greater than 48" wide require additional structural support.

| DESCRIPTION | PRODUCT CODE | LIST PRICE | DIMEN: D | SIONS/INCHES W |
|--|------------------------|------------|-------------|-------------------|
| Quarter Round Panel Corner Worksurface | CWORC2424 CWORC3030 | 257 316 | 24 30 | 24 30 |

CWT - STRAIGHT TRANSACTION WORKSURFACE

- Support hardware must be ordered separately. See the listings in this section.
- Compile worksurfaces feature a 3mm edge.

| | DESCRIPTION | PRODUCT CODE | LIST PRICE | DIMI D | ENSIONS/INCHES W | |
|---|----------------------------------|--|---|--|--|--|
| W | Straight Transaction Worksurface | CWT1512 CWT1518 CWT1524 CWT1530 CWT1536 CWT1542 CWT1544 CWT1554 CWT1566 CWT1566 CWT1572 CWT1578 CWT1578 CWT1578 | 64 85 101 121 138 154 175 191 212 227 247 264 282 | 15 15 15 15 15 15 15 15 15 15 15 15 15 | 12 18 24 30 36 42 48 54 60 66 72 78 84 | |

CWTE - END TRANSACTION SURFACE

- Support hardware must be ordered separately. See the listings in this section.
- Extends 1.5" past end of run.
- Compile worksurfaces feature a 3mm edge.

| | DESCRIPTION | PRODUCT CODE | LIST PRICE | DIMEN D | SIONS/INCHES W |
|---|-------------------------|--|--|--|--|
| W | End Transaction Surface | CWTE1512 CWTE1518 CWTE1524 CWTE1530 CWTE1536 CWTE1542 CWTE1548 CWTE1554 CWTE1554 CWTE1560 | 85 101 121 138 154 175 191 212 227 | 15 15 15 15 15 15 15 15 15 15 | 14 20 26 32 38 44 50 56 62 |
| | | CWTE1566 CWTE1572 | 247 264 | 15 15 15 | 68 74 |

CWTCL - "L" CORNER TRANSACTION SURFACE

- Support hardware must be ordered separately. See the listings in this section.
- When specifying this item along with a straight surface, deduct 12" from each return side.
- Worksurfaces greater than 48" wide require additional structural support.

| | DESCRIPTION | PRODUCT CODE | LIST PRICE | DIMEN: D | SIONS/INCHES W |
|--------------|--------------------------------|--------------|------------|-------------|-------------------|
| W W D D D | "L" Corner Transaction Surface | CWTCL90 | 180 | 15 | 21 |

CW9T - CORNER TRANSACTION SURFACE FOR 90° POST

• Support hardware must be ordered separately. See the listing in this section.

| DESCRIPTION | PRODUCT CODE | LIST PRICE | DIN D | iensions/inches W |
|---|--|---------------------------------|----------------------------|--|
| Corner Transaction Surface for 90° Post | CW9T1524 CW9T1530 CW9T1536 CW9T1542 CW9T1548 | 245 292 338 383 434 | 15 15 15 15 15 | 32.861 38.861 44.861 50.861 56.861 |

CHCB2 - CORNER BRACKET

- Attaches the corner of any worksurface to a panel connector.
- Priced and shipped in pairs.

• Cannot be used off modular.

• Can be used when a panel is the same depth as the worksurface in the front and back application.

• Available in standard paint colors.

| | DESCRIPTION | PRODUCT CODE | LIST PRICE | DIMENSIONS/INCHES D W |
|-------------------------------|----------------|--------------|------------|--------------------------|
| | Corner Bracket | CHCB2 | 22 | 2.5 |
| $\langle \cdot \cdot \rangle$ | | | | |

CHWB1 - MID SPAN SUPPORT BRACKET

- Does not need to be on module.
- Used when a panel exceeds the depth of the adjacent worksurface.
- Can only be used with a Segmented Panel.
- Comes in unfinished zinc.

| | DESCRIPTION | PRODUCT CODE | LIST PRICE | DIMENS D | SIONS/INCHES W |
|---|--------------------------|--------------|------------|-------------|-------------------|
| 0 | Mid Span Support Bracket | CHWB1 | 14 | | |

CHC15 & CHC22- CANTILEVER

- Attaches a worksurface to a panel.
- Use one cantilever to support two convergent worksurfaces when specified with 3 Flat Brackets or two cantilevers with one flat bracket to support two convergent worksurfaces.
- Does not include Flat Brackets.

- Priced individually
- Specify handedness of each cantilever
- Available in standard paint colors.
- Right and left Cantilever needs to be specified unless flat brackets are also specified.

| DESCRIPTION | PRODUCT CODE | LIST PRICE | DIMI D | ENSIONS/INCHES W | |
|------------------|------------------|------------|-----------|---------------------|--|
| Cantilever - 15" | CHC15L CHC15R | 50 50 | 15 15 | 6 6 | |
| Cantilever - 22" | CHC22L CHC22R | 77 77 | 22 22 | 6 6 | |

CMHC - WORKSURFACE SUPPORT CHANNEL

- Support channel attaches to underside of worksurface with screws
- Support channel should be 14" shorter than top length.

- Only available in Black.
- Tops with post legs should be specified with support channel for structural reinforcement.

• Screws are included.

| | DESCRIPTION | PRODUCT CODE | LIST PRICE | DIMEI L | NSIONS/INCHES D |
|-----------|-----------------------------|-----------------------------|------------|------------|--------------------|
| <i>In</i> | Worksurface Support Channel | CMHC40 - for 54" wide table | 84 | 40 | 5 |
| | | CMHC46 - for 60" wide table | 91 | 46 | 5 |
| | | CMHC52 - for 66" wide table | 101 | 52 | 5 |
| | | CMHC58 - for 72" wide table | 114 | 58 | 5 |
| | | CMHC64 - for 78" wide table | 124 | 64 | 5 |
| W | | CMHC70 - for 84" wide table | 138 | 70 | 5 |

CHFB1 - FLAT BRACKET

- Use in conjunction with Cantilever to make it a shared Cantilever to support Available in Black only. convergent worksurfaces.
- Used at the front of 2 convergent worksurfaces to keep worksurfaces flush at seams.

| | DESCRIPTION | PRODUCT CODE | LIST PRICE | DIMENS D | SIONS/INCHES W |
|------|--------------|--------------|------------|-------------|-------------------|
| •••• | Flat Bracket | CHFB1 | 21 | 3 | 4 |

CHTB2 - TRANSACTION TOP BRACKETS

- Securely attaches a transaction surface to the top of a panel.
- One pair must be on each side of transaction surface.

- Priced and shipped in pairs.
- Available in Anodized Aluminum only.

| DESCRIPTION | PRODUCT CODE | LIST PRICE | DIMENSIONS/INCHES D W |
|--------------|--------------|------------|--------------------------|
| Flat Bracket | CHTB2 | 22 | 2.5 |



CHEP - END PANEL

- · Supports the worksurface and enhances the stability of connected panels.
- Provides solid support at the end of a run of worksurfaces.
- Finished in thermally-fused laminate.

- Includes flat brackets and hardware.
- End panel height is inclusive of panel glides extended to their fullest height.
- If wood grains is selected, grain runs vertically.

| DESCRIPTION | PRODUCT CODE | LIST PRICE | DIM D | ENSIONS/INCHES W | |
|---------------------|----------------------|------------|----------|---------------------|--|
| End Panel - 28"High | CHEP2924 CHEP2930 | 264 311 | 28 28 | 24 30 | |

CHMSL - MID SUPPORT LEG

- Provides support for a worksurface.
- Includes leveling glide, PVC Sleeve and 4.8" x 4.8" attachment plate.
- 1.5" diameter.
- Available in standard paint colors.

| | DESCRIPTION | PRODUCT CODE | LIST PRICE | DIMENSIONS/INCHES H |
|--------------------|--------------------------|--------------|------------|------------------------|
| $\hat{\mathbf{Y}}$ | Mid Support Leg - Round | CHMSL1 | 91 | 28 |
| | Mid Support Leg - Square | CHMSL2 | 91 | 28 |
| | | | | |

CMHCL & CHHCL - CORNER LEG WITH LEVELER

• Provides support for a worksurface.

• 1.5" diameter

• Includes leveling glide, PVC Sleeve and attachment plate.

- Available in standard paint colors.
- Legs can be used in the corner of a single worksurface or be rotated 45 degrees to support the corners of two worksurfaces.

| | DESCRIPTION | PRODUCT CODE | LIST PRICE | DIMENSIONS/INCHES H |
|--------------|----------------------|--------------|------------|------------------------|
| \mathbf{Y} | Corner Leg Round | CMHCL1 | 127 | 28 |
| | Corner Leg Square | CMHCL2 | 127 | 28 |

CHWS - 5" SURFACE TO STORAGE SUPPORT LEG

• Provides support for a worksurface.

Square

Ļ

- Includes leveling glide, PVC Sleeve and 4.8" x 4.8" attachment plate.
- 1.5" diameter.
- Available in standard paint colors.

| | DESCRIPTION | PRODUCT CODE | LIST PRICE | DIMENSIONS/INCHES H |
|-------------------|--|--------------|------------|------------------------|
| $\langle \rangle$ | 5" Surface to Storage Support Leg - Round | CHWSRL01 | 59 | 4.5 |
| | 5" Surface to Storage Support Leg - Square | CHWSSL01 | 59 | 4.5 |

Round

CHMEGR - METAL END GABLE - RIGHT

- Supports the worksurface and enhances the stability of connected panels.
- Includes a levelling glide and decorative PVC sleeve to cover the glide.

• Available in standard paint colors.

| DESCRIPTION | PRODUCT CODE | LIST PRICE | DIME H | NSIONS/IN D | ICHES W | |
|-------------------------|----------------------------------|-------------------|----------------|----------------|-------------|--|
| Metal End Gable - Right | CHMEG18R CHMEG24R CHMEG30R | 267 285 300 | 28 28 28 | 17 23 29 | 4 4 4 | |
| | | | | | | |

CHMEGL - METAL END GABLE - LEFT

- Supports the worksurface and enhances the stability of connected panels.
- Includes a levelling glide and decorative PVC sleeve to cover the glide.
- Available in standard paint colors.

| DESCRIPTION | PRODUCT CODE | LIST PRICE | DIM H | ENSIONS/II W | NCHES D |
|------------------------|----------------------------------|-------------------|----------------|-----------------|-------------|
| Metal End Gable - Left | CHMEG18L CHMEG24L CHMEG30L | 267 285 300 | 28 28 28 | 17 23 29 | 4 4 4 |

CHMSL - METAL SUPPORT LEG

- Supports two adjoining worksurfaces and enhances the stability of connected panels.
- Available in standard paint colors.
- Flat brackets recommended to ensure alignment of neighboring surface.
- Includes a levelling glide and decorative PVC sleeve to cover the glide.

| DESCRIPTION | PRODUCT CODE | LIST PRICE | DIMI H | ENSIONS/INC W | CHES D |
|-------------------|--------------|------------|-----------|------------------|-----------|
| Metal Support Leg | CHMSL12 | 239 | 28 | 11 | 4 |

PEDESTAL FILLER BRACKET

• Screws to back of pedestal

• Fills the gap between the pedestal and panel when wing pnael is not used.

| DESCRIPTION | PRODUCT CODE | LIST PRICE | DIMEN D | ISIONS/INCHES W |
|--------------------------|--------------|------------|------------|--------------------|
| Pedestal Filler Bracket- | CHPBF | 60 | 26.875 | 1.375 |

WORKSURFACES

CHPEDB - FLUSH PEDESTAL BRACKET

- Attaches metal or laminate storage or desking, to Compile panels for additional panel support
- Used in flush mount applications only

Use CHPBF Pedestal Filler Bracket with CS19xx Pedestals and standard depth worksurfaces

| | DESCRIPTION | PRODUCT CODE | LIST PRICE | DIMENS H | SIONS/INCI W | HES D |
|---|------------------------|--------------|------------|-------------|-----------------|----------|
| 0 | Flush Pedestal Bracket | CHPEDB | 29 | 8 | 1 | 1 |

storage

LATERAL FILE FEATURES

DRAWERS/SHELVES

- Drawer interlocking system
- Three-stage, anti-bounceback suspension
- Pre-installed, side-to-side file bars for letter, legal and A4
- Front-to-back file bars optional
- Full-height dividers optional
- Angled full pull

CONSTRUCTION

- Top stiffener bar
- Corner gussets
- Four (4) ganging drill points are marked to ensure correct positioning
- Cam lock included
- Leveling glides
- Counterweights are included in 2, 3 and 4 drawer cabinets. BIFMA does not require counterweight in 5 drawer cabinets.

PEDESTAL FEATURES

DRAWERS/SHELVES

- All drawer fronts feature a recessed, angled full pull.
- Drawers feature ball bearing suspension.

CONSTRUCTION

- Central Core removable cam locks.
- Pedestals are 15" wide.
- Counterweight is standard on all Freestanding models.
- · Worksurfaces supporting models have holes drilled in top to attach underneath a worksurface.

STANDARD PAINT COLORS

| BLACK | BLK |
|----------------|-----|
| DESIGNER WHITE | DWT |
| NEVADA | NEV |
| STEEL | STL |

TEXTURED PAINT COLORS

| Only available on | Compile Storage. |
|-------------------|------------------|
| BLIZZARD | BZD |
| STONE DUST | SDT |


GENERAL WARRANTY INFORMATION

• Evolve warrants all components of metal storage and filing for the lifetime of the product to the original purchaser.

This page provides a three dimensional view of a sample configuration highlighting each storage component required when specifying this configuration.

Components

- A. CSOF13XX KD Overhead
- B. CSSL13XX Low-Profile Shelf
- C. CM19XXBBF Worksurface Supporting Box, Box, File Pedestal

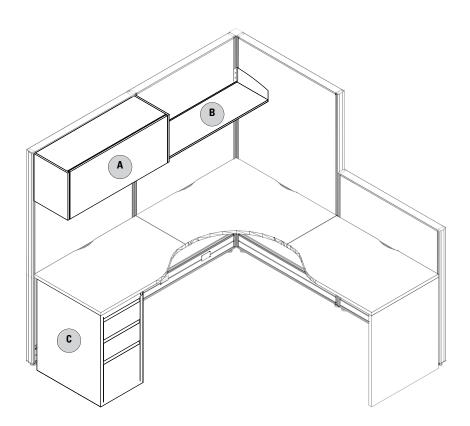

CS19XXBBF - WORKSURFACE SUPPORTING BOX/BOX/FILE 15" PEDESTAL

- Worksurface supporting, with predrilled holes in the top.
- Also available as freestanding with finished top.
- All drawer fronts feature a recessed, angled full pull.

- Pedestal height shown includes glide.
- Pencil tray and Lock included.
- File Bars are not included with Compile pedestals. To order file bars, use product code CSPEDHFB at \$15.00 each list.

| | DESCRIPTION | PRODUCT CODE | LIST PRICE | DIM | ENSIONS/INC | HES |
|----------|---------------------------|--------------|------------|--------|-------------|-----|
| | | | | Н | D | W |
| \wedge | Worksurface Supporting | CS1919BBF | 549 | 27 5⁄8 | 18 5⁄8 | 15 |
| | Box/Box/File 15" Pedestal | CS1923BBF | 565 | 27 5⁄8 | 22 5⁄8 | 15 |
| | | CS1929BBF | 641 | 27 5⁄8 | 29 5⁄8 | 15 |

CS19XXFF - WORKSURFACE SUPPORTING FILE/FILE 15" PEDESTAL

- Worksurface supporting, with predrilled holes in the top.
- Also available as freestanding with finished top.
- All drawer fronts feature a recessed, angled full pull.

- Pedestal height shown includes glide.
- Lock included.
- File Bars are not included with Compile pedestals. To order file bars, use product code CSPEDHFB at \$15.00 each list.

| | DESCRIPTION | PRODUCT CODE | LIST PRICE | DIMENSIONS/INCI | | HES |
|----------|------------------------|--------------|------------|-----------------|--------|-----|
| | | | | Н | D | W |
| \wedge | Worksurface Supporting | CS1919FF | 549 | 27 5⁄8 | 18 5⁄8 | 15 |
| | File/File 15" Pedestal | CS1923FF | 565 | 27 5⁄8 | 22 5⁄8 | 15 |
| | | CS1929FF | 641 | 27 5⁄8 | 29 5⁄8 | 15 |

• evolvefurnituregroup.com

CSSL13 - LOW PROFILE SHELF

- 13" deep panel-mounted storage shelf with backlip.
- Mounting brackets are included.

| DESCRIPTION | PRODUCT CODE | LIST PRICE | DIMENSIONS/INCHES | | |
|-------------------------|--------------|--|---|--|---|
| | | | Н | D | W |
| Low Profile Shelf - 13" | CSSL1324 | 136 | 5 | 13 | 24 |
| | CSSL1330 | 150 | 5 | 13 | 30 |
| | CSSL1336 | 163 | 5 | 13 | 36 |
| | CSSL1342 | 175 | 5 | 13 | 42 |
| | CSSL1348 | 184 | 5 | 13 | 48 |
| | CSSL1354 | 192 | 5 | 13 | 54 |
| | CSSL1360 | 198 | 5 | 13 | 60 |
| | | Low Profile Shelf - 13" CSSL1324 CSSL1330 CSSL1336 CSSL1342 CSSL1342 CSSL1348 CSSL1354 | Low Profile Shelf - 13" CSSL1324 136 CSSL1330 150 CSSL1336 163 CSSL1342 175 CSSL1348 184 CSSL1354 192 | Low Profile Shelf - 13" CSSL1324 136 5 CSSL1330 150 5 CSSL1336 163 5 CSSL1342 175 5 CSSL1348 184 5 CSSL1354 192 5 | H D Low Profile Shelf - 13" CSSL1324 136 5 13 CSSL1330 150 5 13 CSSL1336 163 5 13 CSSL1342 175 5 13 CSSL1342 175 5 13 CSSL1348 184 5 13 CSSL1354 192 5 13 |

CSOF13 - KD OVERHEAD

- Mounting brackets are included.
- Door retracts up and over the cabinet
- Ready for quick assembly on site.
- Quality steel construction.

• 60" unit is reinforced for proper weight distribution.

• Inside dimensions: 12" h x 12.75" d

| | DESCRIPTION PRODUCT CODE LIST PRICE | | | | DIMENSIONS/INCHES | | |
|--------------|-------------------------------------|----------|-----|------|-------------------|----|--|
| | | | | Н | D | W | |
| \frown | KD Overhead - 13" | CS0F1324 | 357 | 14.5 | 13 | 24 | |
| | | CSOF1330 | 392 | 14.5 | 13 | 30 | |
| | | CSOF1336 | 432 | 14.5 | 13 | 36 | |
| | | CSOF1342 | 457 | 14.5 | 13 | 42 | |
| | | CSOF1348 | 483 | 14.5 | 13 | 48 | |
| | | CSOF1354 | 547 | 14.5 | 13 | 54 | |
| \checkmark | | CSOF1360 | 591 | 14.5 | 13 | 60 | |

CMSLK13 - LOCK FOR KD OVERHEAD

• Must be specified separately.

| DESCRIPTION | PRODUCT CODE | LIST PRICE | DIME H | NSIONS/IN(D | CHES W |
|----------------------|--------------|------------|-----------|-----------------|-----------|
| Lock for KD Overhead | CMSLK13 | 44 | | | |

CSLOCKKEY - CORE AND KEY

| DESCRIPTION | PRODUCT CODE | LIST PRICE | DIME H | NSIONS/INCH D | ES W |
|------------------------|--------------|------------|-----------|------------------|---------|
| LOCKKEY - Core and Key | CSLOCKKEY | 42 | | | |

CMEK93 - EXTRA KEY

• Must be specified at time of order.

| DESCRIPTION | PRODUCT CODE | LIST PRICE | DIMEN H | ISIONS/INC D | HES W |
|-------------|--------------|------------|------------|-----------------|----------|
| Extra Key | CMEK93 | 19 | | | |

CMDAOHXX - CENTER MOUNT OVERHEAD

- Inside dimensions 13" high x 13" deep.
- Laminate Overhead. No doors.
- Available in standard Compile laminate finishes.

- Top mount on panels.
- Overhead Support Brackets are included.

| DESCRIPTION | PRODUCT CODE | LIST PRICE | DIM H | ENSIONS/IN D | CHES W | |
|-----------------------------|--|--------------------------------------|----------------------------------|----------------------------------|----------------------------|--|
| Center Mount Overhead - 13" | CMDAOH36 CMDAOH42 CMDAOH48 CMDAOH54 CMDAOH60 | 1121 1216 1273 1369 1423 | 15 15 15 15 15 15 | 13 13 13 13 13 13 | 36 42 48 54 60 | |

CMADAXXPM - ADA COMPLIANT OVERHEAD STORAGE UNIT

- Panel Mounted Overhead Storage with metal sides and opaque door that retracts
 on top of the unit
- Meets CSA B651 Barrier Free Design & ADA (American Disabilities Act).
- 16" high units accept standard and A4 binders.
- All shelves are reinforced for proper weight distribution.

- Inside dimensions: 14.25" high x 12" deep.
- Unit includes attachment hardware, lock and mounting brackets. Back not included.
- · Shipped partially assembled.
- Available in standard Compile paint colors only. Door made of opaque plastic.
 **add 10% upcharge for Fog.

| | DESCRIPTION | PRODUCT CODE | LIST PRICE | DIMENSIONS/INCHES | | HES | |
|---------------------------|-------------------------------------|------------------|------------|-------------------|------|-----|--|
| | | | | Н | D | W | |
| | ADA Compliant Overhead Storage Unit | CMADA30PM | 1139 | 16 | 14.2 | 30 | |
| $\langle \lambda \rangle$ | | CMADA36PM | 1230 | 16 | 14.2 | 36 | |
| | | CMADA42PM | 1314 | 16 | 14.2 | 42 | |
| \checkmark | | CMADA48PM | 1403 | 16 | 14.2 | 48 | |
| | | CMADA54PM | 1490 | 16 | 14.2 | 54 | |
| | | CMADA60PM | 1423 | 16 | 14.2 | 60 | |

STORAGE

CWMA - VERTICAL CHANNEL

- Used to attach system components to fixed wall.
- Panel frame finish.
- Comes in 60" length only.
- Care should be taken to mount adapters only to wall studs using correct fasteners.
- Does not include mounting hardware. Mounting hardware selection to be based on wall material. Sold in pairs.
- Failure to do this may result in collapse of the unit and subsequent possible personal injury.
- Compile vertical channels cannot be shared.

| DESCRIPTION | PRODUCT CODE | LIST PRICE | DIMI H | ENSIONS/INC W | CHES D | |
|------------------|--------------|------------|-----------|------------------|-----------|--|
| Vertical Channel | CWMA60 | 39 | 60 | 0.6 | 0.7 | |

CS19XX-1X1FH - ONE 1/2 HEIGHT FIXED FRONT & ONE 12" FIXED FRONT LATERAL FILE

- 1/2 Height Box Drawer.
- 1 Fixed Drawer Front.
- Includes Lock.

- Lateral File Top is required when not installed under a worksurface.
- Counterweights must be specified on lateral files with pull out drawers, unless worksurface supporting, ganged together or anchored to the floor or wall.

| | DESCRIPTION | PRODUCT CODE | LIST PRICE | DIMENSIONS/INCHES | | |
|--------|----------------------------------|---------------|------------|-------------------|-------|----|
| | | | | Н | D | W |
| \sim | One 1/2 Height Fixed Front & | CS1930P-1X1FH | 1241 | 21.1875 | 19.25 | 30 |
| | One 12" Fixed Front Lateral File | CS1936P-1X1FH | 1325 | 21.1875 | 19.25 | 36 |
| | | CS1942P-1X1FH | 1407 | 21.1875 | 19.25 | 42 |

CS19XX-1XSND - ONE 1/2 HEIGHT OPEN SHELF & ONE 12" OPEN SHELF LATERAL CABINET

- 1/2 Height Open Shelf.
- Bottom Open Shelf.

| | DESCRIPTION | PRODUCT CODE | LIST PRICE | DIMENSIONS/INCHES | | | |
|----------|------------------------------------|--------------|------------|-------------------|-------|----|--|
| | | | | Н | D | W | |
| \frown | One 1/2 Height Open Shelf & | CS1930-1XSND | 622 | 21.1875 | 19.25 | 30 | |
| | One 12" Open Shelf Lateral Cabinet | CS1936-1XSND | 707 | 21.1875 | 19.25 | 36 | |
| | | CS1942-1XSND | 787 | 21.1875 | 19.25 | 42 | |

CWFT - LATERAL FILE TOPS

• Available in standard Compile finishes.

| DESCRIPTION | PRODUCT CODE | LIST PRICE | | IENSIONS/INC | |
|-------------------------|-------------------------|---|---|--|--|
| | | LP | Н | D | W |
| Lateral File Tops | CWFT1930 | 163 | 1 | 19.25 | 30 |
| | CWFT1936 | 167 | 1 | 19.25 | 36 |
| | CWFT1942 | 214 | 1 | 19.25 | 42 |
| 2 Lateral Files SBS Top | CWFT1960 | 339 | 1 | 19.25 | 60 |
| | CWFT1972 | 367 | 1 | 19.25 | 72 |
| | CWFT1984 | 597 | 1 | 19.25 | 84 |
| 4 Lateral File BTB Top | CWFT3860 | 673 | 1 | 38.75 | 60 |
| | CWFT3872 | 765 | 1 | 38.75 | 72 |
| | CWFT3884 | 907 | 1 | 38.75 | 84 |
| | 2 Lateral Files SBS Top | CWFT1936 CWFT1942 2 Lateral Files SBS Top CWFT1972 CWFT1984 4 Lateral File BTB Top CWFT3860 CWFT3872 | CWFT1936 167 CWFT1942 214 2 Lateral Files SBS Top CWFT1960 339 CWFT1972 367 CWFT1984 597 4 Lateral File BTB Top CWFT3860 673 CWFT3872 765 | Lateral File Tops CWFT1930 163 1 CWFT1936 167 1 CWFT1942 214 1 2 Lateral Files SBS Top CWFT1960 339 1 CWFT1972 367 1 CWFT1984 597 1 4 Lateral File BTB Top CWFT3860 673 1 CWFT3872 765 1 | Lateral File Tops CWFT1930 CWFT1936 163 1 19.25 CWFT1936 167 1 19.25 CWFT1942 214 1 19.25 2 Lateral Files SBS Top CWFT1960 339 1 19.25 CWFT1972 367 1 19.25 CWFT1984 597 1 19.25 4 Lateral File BTB Top CWFT3860 673 1 38.75 CWFT3872 765 1 38.75 |

CS19XXP - 2F12 - LATERAL FILES - 2 DRAWERS WITH COUNTERWEIGHT

- Counterweight is standard. Two fixed front drawers.
- Side-to-side hanging file bars included.
- Drawers are 12.25" high.

- File cannot be used to store standard three ring binders.
- Lock included.

| | DESCRIPTION | PRODUCT CODE | LIST PRICE | DIMENSIONS/INCHES | | |
|--|---------------------------|--------------|------------|-------------------|-------|----|
| | | | | Н | D | W |
| | Lateral Files - 2 Drawers | CS1930P-2F12 | 985 | 27.14 | 19.25 | 30 |
| | with Counterweight | CS1936P-2F12 | 1061 | 27.14 | 19.25 | 36 |
| | | CS1942P-2F12 | 1103 | 27.14 | 19.25 | 42 |
| | | | | | | |
| | | | | | | |