

Price List Effective Dates:	
Pricing	07.02.18
Revision	06.15.18



	➤ See page
<b>Statement of Line</b>	14.2
Panels, Connectors, Trim	14.2
Power and Data	14.3
<b>Planning</b>	14.4
Overview	14.4
Product Information	14.5
Panel Configurations	14.14
Power & Data	14.21
Cable Management	14.28
<b>Pricing</b>	14.29
Panels	14.29
Doors	14.67
Supplemental Brackets	14.68
Tackboards	14.70
Connectors and Trim	14.71
Power and Data	14.83
<b>Surface Materials</b>	14.93
Laminate	14.93
Paint & Polymer	14.94
Fabric	14.95
COM	14.96


Statement of Line	➤ See page 14.2
Planning	14.4
Pricing	14.29
Surface Materials	14.93



**Tackable Acoustical Panels**  
➤ See page 14.5 for product info.  
➤ See pages 14.29–14.32 to specify.




**Glass Panels**  
➤ See page 14.6 for product info.  
➤ See page 14.33 to specify.




**Tackable Sectional Panels**  
➤ See page 14.7 for product info.  
➤ See pages 14.34–14.63 to specify.



**Stackable Panels**  
Available in fabric and glass models.  
➤ See page 14.9 for product info.  
➤ See pages 14.64–14.65 to specify.




**Privacy Panels**  
➤ See page 14.10 for product info.  
➤ See page 14.66 to specify.



**Hinged Doors**  
➤ See page 14.11 for product info.  
➤ See page 14.67 to specify.




**Tackboards**  
➤ See page 14.70 to specify.




**Finish Channels**  
➤ See page 14.12 for product info.  
➤ See pages 14.71–14.74 to specify.



**Trim Top Caps**  
➤ See page 14.12 for product info.  
➤ See pages 14.75–14.76 to specify.



**End Caps**  
➤ See page 14.77 to specify.



**End Trim**  
➤ See pages 14.78–14.80 to specify.



**Traxx Starter Kit**  
➤ See page 14.13 for product info.  
➤ See page 14.81 to specify.




**Wall-Mount Connectors**  
➤ See page 14.13 for product info.  
➤ See page 14.82 to specify.

Statement of Line	➤ See page 14.2
Planning	14.4
Pricing	14.29
Surface Materials	14.93




**Power Distribution Assemblies**  
➤ See page 14.22 for product info.  
➤ See page 14.83.




**Jumper Cables**  
➤ See page 14.22 for product info.  
➤ See page 14.84.




**Duplex Receptacles**  
➤ See page 14.22 for product info.  
➤ See page 14.85.




**Base Power Entry**  
➤ See page 14.23 for product info.  
➤ See page 14.85.




**Ceiling Power Entry**  
➤ See page 14.23 for product info.  
➤ See page 14.85.



**Hardwire Electrical**  
➤ See page 14.24 for product info.  
➤ See page 14.86 to specify.

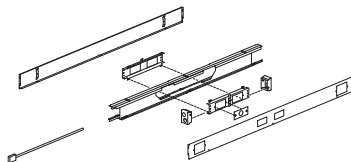


**New York City Electrical**  
➤ See page 14.25 for product info.  
➤ See page 14.87 to specify.



**Power/Data Poles**  
➤ See page 14.23 for product info.  
➤ See page 14.88 to specify.



**Data Components**  
➤ See page 14.89.



**Data Channels**  
➤ See page 14.12 for product info.  
➤ See pages 14.90–14.91 to specify.



**Vertical Cable Managers**  
➤ See page 14.92 to specify.

Statement of Line	➤ See page 14.2
Planning	14.4
Pricing	14.29
Surface Materials	14.93

**Top caps** feature integral snap fit to secure the top cap onto the panel.

**Top channel** provides lay-in capability of data cables.

**Horizontal rail** holds panel face in place at the top and bottom of the frame.

**Full-height end trim** provides a finished look at the end of the panel run.

**Side rails** are slotted at 1" increments for attachment of panel-supported components.

**Glides** provide 2" of adjustability. Carpet grippers are included.

**Panel hinges** lock panels together along the full height of the panel.


**In-line connectors** transition joints between panels in straight panel runs. Specified separately.

**Alignment clips** slip into alignment slots to vertically align adjacent panels.

**Wireways** allow power and data routing through panels bases.

**Wireway covers** are available punched or non-punched for power and data access.  
➤ See page 14.21.

### Top Cap Profiles:



**Crowned (C) top caps** are available in select colors.

### Electrical:



**Class A**—Tackable acoustical panels

### Related Products:

Traxx and tiles are available to integrate wall-mount applications and panel applications.  
➤ See the Traxx & Tiles chapter in the *Kimball Panel Systems Price List*.


Statement of Line	➤ See page 14.2
Planning	14.4
Pricing	14.29
Surface Materials	14.93

## Details



**Tackable acoustical panels** are 2" thick and fabric covered. All panel models include:

- Top cap
- Wireway covers
- Panel hinges
- Glides and carpet grippers



**Panel frame** is constructed of 1 1/4" steel tubing. Panel interior has two sheets of 1/4" thick fiberglass that are held in place at the top and bottom with a horizontal rail.



**Side rails** provide slots at 1" increments for mounting components.

**Panel dimensions** listed in the pricing tables are actual. Panel width includes the width of the panel plus the width of one panel hinge.

## Finishes & Materials

### Tackable Acoustical Panel

- Kimball panel fabrics: grade A and B
- COM

*Note: COM fabrics must be U.L. listed for use on panels.*

➤ See the *Kimball Surface Materials Reference Guide* at [www.kimball.com](http://www.kimball.com) for complete information regarding U.L. approval procedures.

### Top Cap

- Aluminum: select paint colors

### Wireway Covers

- Steel: select paint colors

### Full-Height End Trim

- PVC: select colors

### Trim Top Cap and In-Line Connector Kit

- ABS plastic: select colors


### Panel Hinge

- Polypropylene: select colors


## Acoustical Ratings

- NRC rating = .65
- STC rating = 15

## Connections




**Continuous, polypropylene panel hinge** inserted into side rails locks adjacent panels together along the full height of the panel. This hinge design allows removal of a single in-line panel, simplifying reconfigurations.



**In-line connector kit**, specified separately, provides a connector to transition joints between panels in a straight run and an alignment clip that slips into alignment slots to vertically align adjacent panels. They are required at each in-line panel-to-panel connection.

➤ See page 14.76.




**Panel hinges interlock** to form L-, T-, X- and 120°-configurations. Alignment clips, included with finish channels, are essential for proper alignment.

**Panel runs** may also be started using a wall-mount connector or Traxx starter kit.

➤ See page 14.13.


## Power & Data



**Wireway** in the panel base allows power and data cable routing.

**Power distribution assembly**, factory-installed in the base wireway of 24"W and wider powered panels, allows distribution of power. Power can also be field-installed on non-powered panels. 18"W panels provide no power or data access, but can pass power to adjacent panels.

➤ See page 14.22.



**Cable routing** is possible in the base wireway and in the top channel. Base wireway can accommodate up to 8 1/4"-diameter data cables at 40% fill or up to 12 at 60% fill. Top channel provides lay-in capability of up to 22 1/4"-diameter data cables at 40% fill or up to 33 at 60% fill. The capacity from panel to panel is 11 at 40% fill or 16 at 60% fill.

fill. Capacity is based on 1/4"-diameter (nominal) Cat 5 or Cat 6 (4-pair UTP) cables. Data cables can also be run from the base to the mid-wireway.

## Related Products

**Full-height end trim**, specified separately, is required to provide a finished look to the end of a panel run.

➤ See page 14.78.

**Finish channels** are required when changing directions. They include alignment clips for proper panel alignment and for L, T, and, and X configurations. Specify separately.

➤ See page 14.12.


Statement of Line	➤ See page 14.2
Planning	14.4
Pricing	14.29
Surface Materials	14.93

## Details



**Full glass panels** are 2" thick and feature a horizontal rail at the top and bottom. All panel models include:

- Top cap
- Wireway covers
- Panel hinges
- Glides and carpet grippers



**Tempered glass** is 1/8" thick and secured in an 27/8" extruded aluminum frame. Structural frame is 1 1/4" steel tubing.



**Side rails** provide slots at 1" increments for mounting components.

**Panel dimensions** listed in the pricing tables are actual. Panel width includes the width of the panel plus the width of one panel hinge.

## Finishes & Materials

### Glass

- Tempered: clear or frosted

### Glass Panel Frame

- Aluminum: select paint colors

### Top Cap

- Aluminum: select paint colors

### Wireway Covers

- Steel: select paint colors

### Full-Height End Trim

- PVC: select colors

### Trim Top Cap and In-Line Connector Kit

- ABS plastic: select colors


### Panel Hinge

- Polypropylene: select colors


## Connections

**Worksurfaces** can be mounted on glass panels; however, consider the visual through the glass from the back side.


**Overheads** cannot be mounted to glass panels.



**Continuous, polypropylene panel hinge** inserted into side rails locks adjacent panels together along the full height of the panel. This hinge design allows removal of a single in-line panel, simplifying reconfigurations.



**In-line connector kit**, specified separately, provides a connector to transition joints between panels in a straight run and an alignment clip that slips into alignment slots to vertically align adjacent panels. They are required at each in-line panel-to-panel connection.




**Panel hinges interlock** to form L-, T-, X- and 120°-configurations. Alignment clips, included with finish channels, are essential for proper alignment.

**Panels runs** may also be started using a wall-mount connector or Traxx starter kit.

➤ See page 14.13.


## Power & Data

**Wireway** in the panel base allows data routing. Glass panels do not accept power distribution assemblies or pass-thru jumpers.



**Cable routing** is possible in the base wireway and in the top channel. Base wireway can accommodate up to 8 1/4"-diameter data cables at 40% fill or up to 12 at 60% fill. Top channel provides lay-in capability of up to 22 1/4"-diameter data cables at 40% fill or up to 33 at 60% fill. The capacity from panel to panel is 11 at 40% fill or 16 at 60% fill. Capacity is based on 1/4"-diameter (nominal) Cat 5 or Cat 6 (4-pair UTP) cables. Data cables cannot be run from the top to the bottom of full glass panels.

## Related Products

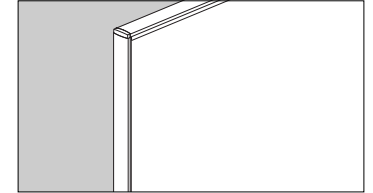

**Full-height end trim**, specified separately, is required to provide a finished look to the end of a panel run.

➤ See page 14.78.

**Finish channels** are required when changing directions. They include alignment clips for proper panel alignment and for L, T, and, and X configurations. Specify separately.

➤ See page 14.12.

Statement of Line	➤ See page 14.2
Planning	14.4
Pricing	14.29
Surface Materials	14.93

## Details



**Sectional panel frames** are constructed of 1 1/4" steel tubing and are 2" thick. Panel tiles are held in place at the top and bottom with a horizontal rail. All panel models include:


- Sectional tiles
- Top cap
- Base wireway covers
- Panel hinges
- Glides and carpet grippers
- Power distribution assembly on powered panels

**Sectional panels ship with the tiles assembled** to the frame. Tiles are held in place at the top bottom with horizontal rails.


**Mid-wireway sectional panel frames** include, in addition to the list above:

- Base and mid-wireway power distribution assemblies
- Base-to-mid-wireway jumper
- Mid-wireway covers


**Panel dimensions** listed in the pricing tables are actual. Panel width includes the width of the panel plus the width of one panel hinge.



**Fabric sectional tiles** are constructed of 1/4"-thick fiberglass and covered with the selected fabric.



**Glass sectional tiles** have a 27/8" extruded aluminum frame with 1/8" tempered glass; available clear or frosted. is available in clear or frosted. Specify only one glass tile to complete both sides of the sectional panel.



**Metal sectional tiles** are 6"H and are designed for placement just above the worksurface for added visual interest. Metal sectional tiles match mid-wireway covers to create a consistent accent band throughout the workstation. They are available in smooth or bordered profiles.

## Finishes & Materials

### Sectional Tiles

- Fabric: Kimball panel fabrics (grades A and B)
- Tempered glass: clear or frosted
- Metal (steel): selected paint colors
- COM

*Note: COM fabrics must be U.L. listed for use on panels.*

➤ See the *Kimball Surface Materials Reference Guide* at [www.kimball.com](http://www.kimball.com) for complete information regarding U.L. approval procedures.

### Top Cap

- Aluminum: select paint colors

### Wireway Covers

- Steel: select paint colors

### Full-Height End Trim

- PVC: select colors

### Trim Top Cap and In-Line Connector Kit

- ABS plastic: select colors


### Panel Hinge

- Polypropylene: select colors


## Acoustical Ratings

- NRC rating = .60
- STC rating = 14
- U.L. Listing = Class A


## Connections



**Continuous, polypropylene panel hinge** inserted into side rails locks adjacent panels together along the full height of the panel. This hinge design allows removal of a single in-line panel, simplifying reconfigurations.



**In-line connector kit**, specified separately, provides a connector to transition joints between panels in a straight run and an alignment clip that slips into alignment slots to vertically align adjacent panels. They are required at each in-line panel-to-panel connection.




**Panel hinges interlock** to form L-, T-, X- and 120°-configurations. Alignment clips, included with finish channels, are essential for proper alignment.


**Panels runs** may also be started using a wall-mount connector or Traxx starter kit.

➤ See page 14.13.

## Power & Data

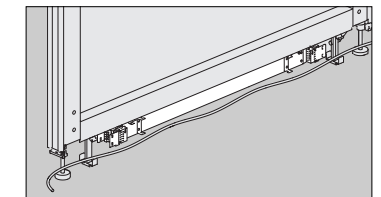

**Wireway** in the panel base allows power and data cable routing.



**Mid-wireway panels** provide power and data access at both worksurface height and at the base. Cables are routed up through the panel from the base wireway.


**Power distribution assembly**, factory-installed in the base wireway of 24"W and wider powered panels, allows distribution of power through the wireway. Power can also be field-installed on non-powered panels.

➤ See page 14.22.




continued

Statement of Line	➤ See page 14.2
Planning	14.4
Pricing	14.29
Surface Materials	14.93



**Cable routing** is possible in the base wireway, mid-wireway, and in the top channel. Base wireways and mid-wireways can accommodate up to 8 1/4"-diameter data cables at 40% fill or up to 12 at 60% fill. Top channel provides lay-in capability of up to 22 1/4"-diameter data cables at 40% fill or up to 33 at 60% fill. The capacity from panel to panel is 11 at 40% fill or 16 at 60% fill. Capacity is based on 1/4"-diameter (nominal) Cat 5 or Cat 6 (4-pair UTP) cables. Data cables can also be run from the base to the mid-wireway.

Related Products



**Full-height end trim**, specified separately, is required to provide a finished look to the end of a panel run. ➤ See page 14.78.

**Finish channels** are required when changing directions. They include alignment clips for proper panel alignment and for L, T, and X configurations. Specify separately. ➤ See page 14.12.

Panel Heights and Corresponding Tile Heights:

14" tile						
18" tile	18" tile	14" tile				
14" tile	14" tile	14" tile	20" tile	14" tile		
6" tile	6" tile	6" tile	6" tile	6" tile	8" tile	
24" tile	24" tile	24" tile	24" tile	24" tile	6" tile	6" tile
					24" tile	24" tile
80"H	66"H	62"H	54"H	48"H	42"H	34"H

*Note: Sectional panels ship with the tiles assembled to the frame. Panels are specified as fully configured models.*



Statement of Line	➤ See page 14.2
Planning	14.4
Pricing	14.29
Surface Materials	14.93

## Details



**Stackable panels** are available for use on top of monolithic, glass, or sectional panels.

**Stackable panels** are 2" thick and have a horizontal rail at top and bottom. All stackable panels models include:

- Panel hinge
- Attachment hardware

*Note: Top cap from base panel will be used on top of stacking panel.*

**Panel dimensions** listed in the pricing tables are actual. Panel width includes the width of the panel plus the width of one panel hinge.

**12", 14", and 18" panel heights** are available to increase the height of the workstation. These heights correspond to sectional panel tile heights for a consistent look when using both types of panels in the same office setting.

➤ See previous page.

**Stackable panels** are available in fabric or glass.

**Fabric stackable panel** is constructed of steel tubing with a 1/4" fiberglass core and covered with selected fabric.

**Tempered glass** in glass stackable is 1/8" thick and available in clear and frosted. Frames are extruded aluminum.

**Top lay-in capability** provides space for up to 22 1/4"-diameter data cables at 40% fill or up to 33 at 60% fill. The capacity from panel to panel is 11 at 40% fill or 16 at 60% fill. Capacity is based on 1/4"-diameter (nominal) Cat 5 or Cat 6 (4-pair UTP) cables.

## Finishes & Materials

### Fabric Stackable Panel

- Kimball panel fabrics: grade A and B
- COM


*Note: COM fabrics must be U.L. listed for use on panels.*

➤ See the *Kimball Surface Materials Reference Guide* at [www.kimball.com](http://www.kimball.com) for complete information regarding U.L. approval procedures.


### Glass Stackable Panel

- Tempered glass: clear or frosted
- Steel-tubing frame: select colors


## Connections



**Continuous, polypropylene panel hinge** inserted into side rails locks adjacent panels together along the full height of the panel. This hinge design allows removal of a single in-line panel, simplifying reconfigurations.




**In-line connector kit**, specified separately, provides a connector to transition joints between panels in a straight run and an alignment clip that slips into alignment slots to vertically align adjacent panels. They are required at each in-line panel-to-panel connection.



**Panel hinges interlock** to form L-, T-, X- and 120°-configurations. Alignment clips, included with finish channels, are essential for proper alignment.

**Installation of stackable panel** is accomplished without disassembling the existing panel run. Stackable panel is bolted to the base panel frame.



**One or two stackable panels** may be stacked onto a base panel to a maximum overall height of 80".

**Width of stackable panel** must match the width of the base panel.


**Panel run stability rules** are the same for stackable panels as for standard Interworks EQ panels.  
➤ See pages 14.14–14.20.

**Overhead components** can be supported by panel runs containing stackable panels; however, specific application guidelines apply.  
➤ See page 14.20.

**Panels made prior to 2/26/07** cannot accommodate stackable panels.

**Panels with model numbers beginning with 10P** cannot accommodate stackable panels with model numbers beginning with 11P, and vice versa.

## Related Products




**Finish channels and end trim, specified separately**, must match the combined height of the base and the stackable panel(s). Finish channels include alignment clips for proper panel alignment and are required in change-of-direction applications. Specify separately.

➤ See page 14.12.

Statement of Line	➤ See page 14.2
Planning	14.4
Pricing	14.29
Surface Materials	14.93

## Details



**Privacy panels** are available 36" or 42"W and in two designs: fabric on both sides or translucent.

**Privacy panel models** include:

- Top attachment bracket
- Base pivot bracket
- Caster

**Fabric privacy panels** have an extruded aluminum frame. Interior is fiberglass over a honeycomb panel.

**Translucent privacy panels** feature a ribbed pattern to provide privacy, yet allow light to pass through. Frame is extruded aluminum.

**Single caster** allows privacy panel to pivot open or closed.

## Finishes & Materials


### Privacy Panel Frame

- 462 Cinder paint
- 501 Platinum metallic paint

### Privacy Panel Inserts


- Kimball panel fabrics: grade A and B
  - COM
- Note: COM fabrics must be U.L. listed for use on panels.*
- See the *Kimball Surface Materials Reference Guide* at [www.kimball.com](http://www.kimball.com) for complete information regarding U.L. approval procedures.
- Translucent

## Connections



**Top attachment bracket** is used to mount the privacy panel to any 66"H Interworks EQ panel. Top bracket attaches under the top cap and can be easily relocated.

**Privacy panel is 68"H** and is compatible to, but does not directly align with, Interworks EQ panels.




**Base pivot bracket** features a carpet gripper to hold bracket in place while allowing the privacy panel to swing.


**Privacy panels abut the opposite panel**, but do not latch.

**Non-handed and reversible**, privacy panels can be mounted left or right, and can be flipped so different fabrics can be positioned inside or outside the workstation.

## Planning Factors




**When mounted to the perpendicular panel** (on one or both sides) in an L or T configuration, panel swings 90°.



**When mounting in a straight panel run**, specify privacy panel to be wider than the opening to allow for proper clearance. Panel will swing 180° to lay flat against the Interworks EQ panel.

Statement of Line	➤ See page 14.2
Planning	14.4
Pricing	14.29
Surface Materials	14.93


Details



**Hinged doors** are available 36" or 42"W (nominal). All hinged doors include:

- Frame and threshold
- Top cap
- Panel hinges
- In-line connector caps

**Door** is 17/16" thick hollow-core construction with laminate faces.




**Locking lever** is available and is suitable for ADA guidelines.

**Door opening width** for the 36"W door is 297/8"; for the 42"W door it is 357/8". Opening height is 763/4". 42"W hinged door is recommended for ADA guidelines.

Finishes & Materials


- Door**
- Solid laminate: select colors
- Door Frame**
- Paint: select colors
- Top Cap**
- Aluminum: select paint colors

Connections



**Continuous, polypropylene panel hinge** inserted into side rails locks adjacent panels together along the full height of the panel. This hinge design allows removal of a single in-line panel, simplifying reconfigurations.

Planning Factors

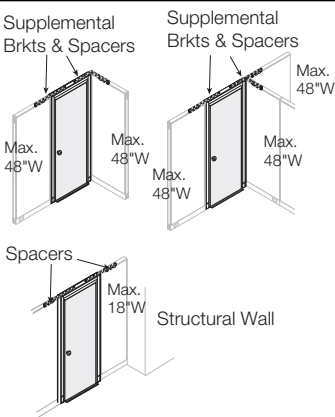


**Hinged doors in a panel run must be placed next to a corner or T-configuration** where panels are not wider than 48" for necessary stability. Supplemental brackets and spacers are required at panel connections along the door panel run.


**Hinged door in wall-mount applications** must not be more than one 18"W panel from the wall.

Statement of Line	➤ See page 14.2
Planning	14.4
Pricing	14.29
Surface Materials	14.93

## Details




**Finish channels** provide a finished look to the end of a panel. Finish channels include alignment clips for proper panel alignment and are required in change-of-direction applications; specified separately.

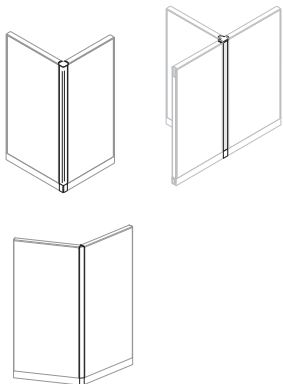


**Same-height corner/L-, straight/T-, and 120° V-configuration finish channels** include:

- Fabric channel
- Finish channel top cap
- Metal base cover
- Alignment clip



**Same-height X- and 3-way 120° Y-configurations** do not require a finish channel since the connection will be concealed by the panels. Specify the appropriate top cap to bridge the gap between the panel top caps.



**Varied-height 3-way/T- and 4-way/X-configuration finish channels** include:

- Fabric channel (one or two)
  - Finish channel top cap
  - In-line fill caps
  - Alignment clip(s)
- The appropriate model is determined based on the difference in panel heights.

## Finishes & Materials

### Finish Channel

- Kimball panel fabrics: grades A and B
  - COM  
*Note: COM fabrics must be U.L. listed for use on panels.*
- See the *Kimball Surface Materials Reference Guide* at [www.kimball.com](http://www.kimball.com) for complete information regarding U.L. approval procedures.

### Top Cap

- Aluminum: select paint colors

## Planning Factors



**3-way/T-configuration with one perpendicular lower-height panel** requires specification of two finish channel models:

- Same-height straight/T finish channel in the appropriate height for the straight side; and
- Varied-height 4-way/X with two lower-height panels finish channel (models 10P\*\*CNHLL) for the side with the lower-height perpendicular panel.


**120° configurations** must always be with same height panels. Varied height finish channels are not available.

**To achieve a different 2-, 3-, or 4-way configuration** than those shown on this page, an alternate top cap must be specified separately in addition to the finish channel.

➤ See page 14.75.

## Power & Data

**When passing electrical cabling from one panel to another**, finish channels are required at change-of-direction connections to enclose cabling. They are not needed between two panels in a straight panel run.




**Data channels** are for use in change-of-height applications to run data cables between the top channel of adjacent panels with differing heights. In-line, corner/L-, and straight/T-configuration are available. Knock outs are provided at each panel height to allow data access into the panel. All models include:


- Metal channel
  - Data channel top cap
  - Metal base cover
  - Alignment clip
  - In-line fill caps
  - Top cap for the lower-height panel (in-line only)
- See page 14.90 to specify.

Statement of Line	➤ See page 14.2
Planning	14.4
Pricing	14.29
Surface Materials	14.93

Details



**Traxx panel starter kit** is used when starting a panel run from a wall with Traxx. The kit must be the same height as the adjoining panel. It includes necessary hardware to attach the perpendicular panel to Traxx.




**Wall-mount connectors** are available to start a panel run from a building wall. The wall-mount connector must be the same height as the adjoining panel and must be attached level to the start of the panel run.

**IMPORTANT:** The selection and purchase of the proper fasteners based on wall type for installing wall-mount and Traxx panel starter kit is the responsibility of the installer.

Finishes & Materials

- Traxx Panel Starter Kit**
  - Paint: select colors
- Wall-Mount Connector**
  - Paint: select colors

Related Products



**Full-height end trim**, specified separately, is required to provide a finished look to the end of a panel run.  
➤ See page 14.78.


Without Components

General Guidelines:

The most stable configurations are those in which panels are tied to worksurfaces and pedestals.


Workstations that include pedestals can accommodate longer panel runs.

Configurations that include overhead storage carry heavier loads and work best on shorter panel runs with additional floor supports.



Unsupported run:

- 8' maximum; and
- 2 panels maximum
- 2 supplemental brackets (recommended)




8' to 15' supported runs:

- 3 panels maximum; and
- Wing panels
- 4 supplemental brackets (recommended)

➤ See minimum wing panel chart at right.

**Do not exceed** maximum number of panels in a run.



C-shaped workstations:

- Wing panels
  - 3 supplemental brackets (recommended)
- See minimum wing panel chart at right.

Statement of Line	➤ See page 14.2
Planning	14.4
Pricing	14.29
Surface Materials	14.93

Definitions:

Unsupported panel runs: Runs not attached on BOTH ends to a wall, panel run, or floor support.

Floor support: Undersurface storage units, support panels, or column legs

Balanced back-to-back: Runs having similar components mounted to opposite sides of the run so as to counter-balance the load.

Minimum Wing Panel Widths:

Minimum wing panel widths increase according to the height of the panel run. These minimum widths eliminate the possibility of tipping or injury under standard loading and usage. They are critical in unsupported (panel only) configurations.

Height of Panel Run	Minimum Wing Width
34", 42", or 48"	30"
54", 62", or 66"	36"
80"	48"

IMPORTANT: Wing panel height is not required to be the same height as the panel run.  
*Exception: Wing panels on 80"H runs must be 80"H.*


Without Overhead Storage

General Guidelines:

The most stable configurations are those in which panels are tied to worksurfaces and pedestals.


Workstations that include pedestals can accommodate longer panel runs.

Configurations that include overhead storage carry heavier loads and work best on shorter panel runs with additional floor supports.




Maximum 12' supported run:

- Cantilevers;
  - 3 panels maximum; and
  - Wing panels; and
  - No overheads
- See minimum wing panel chart at right.



Maximum 12' supported run:


- Cantilevers;
- 3 panels maximum;
- Floor supports at end of wing panel runs; and
- No overheads





Maximum 15' supported run:

- Cantilevers;
- 3 panels maximum;
- Minimum 2 floor supports mid-run;
- Floor supports at end of wing panel runs; and
- No overheads

Do not exceed maximum number of panels in a run.



Unsupported worksurface span of 48"W for 13<sup>1</sup>/<sub>16</sub>" worksurfaces or 60"W for 19<sup>1</sup>/<sub>16</sub>" worksurfaces requires additional support such as a mid-support, support panel, or undersurface storage.



IMPORTANT: It is recommended that wing panels be tied to worksurfaces at front and back edges for maximum stability. If not, specify supplemental brackets.

Specify pedestal filler strip where there is no wing panel beside a pedestal to tie the panel and pedestal together for additional support.

Statement of Line	➤ See page 14.2
Planning	14.4
Pricing	14.29
Surface Materials	14.93

Definitions:

Unsupported panel runs: Runs not attached on BOTH ends to a wall, panel run, or floor support.

Floor support: Undersurface storage units, support panels, or column legs

Balanced back-to-back: Runs having similar components mounted to opposite sides of the run so as to counter-balance the load.

Minimum Wing Panel Widths:

Minimum wing panel widths increase according to the height of the panel run. These minimum widths eliminate the possibility of tipping or injury under standard loading and usage. They are critical in unsupported (panel only) configurations.

Height of Panel Run	Minimum Wing Width
34", 42", or 48"	30"
54", 62", or 66"	36"
80"	48"

IMPORTANT: Wing panel height is not required to be the same height as the panel run.  
Exception: Wing panels on 80"H runs must be 80"H.




General Guidelines:

The most stable configurations are those in which panels are tied to worksurfaces and pedestals.


Workstations that include pedestals can accommodate longer panel runs.

Configurations that include overhead storage carry heavier loads and work best on shorter panel runs with additional floor supports.




Maximum 10' supported run:

- Cantilevers;
  - 3 panels maximum; and
  - Wing panels
- See minimum wing panel chart at right.




Maximum 12' supported run:

- Cantilevers;
  - 3 panels maximum;
  - 1 floor support, minimum; and
  - Wing panels
- Two supplemental brackets recommended
- See minimum wing panel chart at right.



Maximum 12' supported run:

- Cantilevers;
- 3 panels maximum; and
- Floor supports at end of wing panel runs





Maximum 15' supported run:

- Cantilevers;
- 3 panels maximum;
- Floor supports at end of wing panel runs; and
- 2 floor supports mid-run, minimum

**Do not exceed** maximum number of panels in a run.

**IMPORTANT:** Overhead cabinets must be ganged to ensure maximum rigidity.



**IMPORTANT:** It is recommended that wing panels be tied to worksurfaces at front and back edges for maximum stability. If not, specify supplemental brackets.

**Unsupported worksurface span** of 48"W for 1 3/16" worksurfaces or 60"W for 1 9/16" worksurfaces requires additional support such as a mid-support, support panel, or undersurface storage.

**Specify pedestal filler strip** where there is no wing panel beside a pedestal to tie the panel and pedestal together for additional support.

Statement of Line	➤ See page 14.2
Planning	14.4
Pricing	14.29
Surface Materials	14.93

Definitions:

**Unsupported panel runs:** Runs not attached on BOTH ends to a wall, panel run, or floor support.

**Floor support:** Undersurface storage units, support panels, or column legs

**Balanced back-to-back:** Runs having similar components mounted to opposite sides of the run so as to counter-balance the load.

Minimum Wing Panel Widths:

Minimum wing panel widths increase according to the height of the panel run. These minimum widths eliminate the possibility of tipping or injury under standard loading and usage. They are critical in unsupported (panel only) configurations.

Height of Panel Run	Minimum Wing Width
34", 42", or 48"	30"
54", 62", or 66"	36"
80"	48"

**IMPORTANT:** Wing panel height is not required to be the same height as the panel run.  
*Exception: Wing panels on 80"H runs must be 80"H.*


X Configurations

General Guidelines:

The most stable configurations are those in which panels are tied to worksurfaces and pedestals.



Workstations that include pedestals can accommodate longer panel runs.

Configurations that include overhead storage carry heavier loads and work best on shorter panel runs with additional floor supports.



Unsupported run:

- 8' maximum; and
- 2 panels maximum
- 5 supplemental brackets (recommended)




12' supported run:

- Cantilevers;
- 3 panels maximum;
- 1 floor support mid-run minimum; and
- Floor supports at end of wing panel runs

Do not exceed maximum number of panels in a run.

IMPORTANT: Overhead cabinets must be ganged to ensure maximum rigidity.

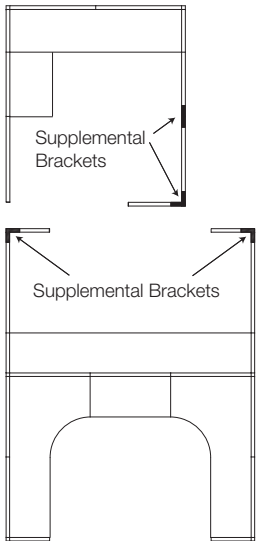

IMPORTANT: It is recommended that wing panels be tied to worksurfaces at front and back edges for maximum stability. If not, specify supplemental brackets.

Statement of Line	➤ See page 14.2
Planning	14.4
Pricing	14.29
Surface Materials	14.93

Definitions:

Unsupported panel runs: Runs not attached on BOTH ends to a wall, panel run, or floor support.

Floor support: Undersurface storage units, support panels, or column legs

Balanced back-to-back: Runs having similar components mounted to opposite sides of the run so as to counter-balance the load.

Minimum Wing Panel Widths:

Minimum wing panel widths increase according to the height of the panel run. These minimum widths eliminate the possibility of tipping or injury under standard loading and usage. They are critical in unsupported (panel only) configurations.

Height of Panel Run	Minimum Wing Width
34", 42", or 48"	30"
54", 62", or 66"	36"
80"	48"

IMPORTANT: Wing panel height is not required to be the same height as the panel run.  
Exception: Wing panels on 80"H runs must be 80"H.


120° V- and Y-Configurations

General Guidelines:

The most stable configurations are those in which panels are tied to worksurfaces and pedestals.


Workstations that include pedestals can accommodate longer panel runs.

Configurations that include overhead storage carry heavier loads and work best on shorter panel runs with additional floor supports.



Unsupported run:


- 8' maximum; and
- 2 panels maximum
- Supplemental brackets (recommended)



Maximum 10' supported V:


- Cantilevers;
  - 3 panels maximum; and
  - Wing panels
- See minimum wing panel chart at right.

**Balanced back-to-back overheads** can extend maximum run to 12'



12' supported Y:



- Cantilevers;
- 3 panels 54"H maximum;
- Floor supports at end of run and one additional at mid-run; and
- No overheads



Maximum 12' supported Y:

- Cantilevers;
  - 3 panels maximum;
  - Wing panels;
  - Balanced back-to-back overheads; and
  - 1 floor support mid-run minimum
- See minimum wing panel chart at right.

**Do not exceed** maximum number of panels in a run.



**IMPORTANT:** It is recommended that wing panels be tied to worksurfaces at front and back edges for maximum stability. If not, specify supplemental brackets.

**Unsupported worksurface span** of 48"W for 1<sup>3</sup>/<sub>16</sub>" worksurfaces or 60"W for 1<sup>9</sup>/<sub>16</sub>" worksurfaces requires additional support such as a mid-support, support panel, or undersurface storage.

Statement of Line	➤ See page 14.2
Planning	14.4
Pricing	14.29
Surface Materials	14.93

Definitions:

**Unsupported panel runs:** Runs not attached on BOTH ends to a wall, panel run, or floor support.

**Floor support:** Undersurface storage units, support panels, or column legs

**Balanced back-to-back:** Runs having similar components mounted to opposite sides of the run so as to counter-balance the load.

Minimum Wing Panel Widths:

Minimum wing panel widths increase according to the height of the panel run. These minimum widths eliminate the possibility of tipping or injury under standard loading and usage. They are critical in unsupported (panel only) configurations.

Height of Panel Run	Minimum Wing Width
34", 42", or 48"	30"
54", 62", or 66"	36"
80"	48"

**IMPORTANT:** Wing panel height is not required to be the same height as the panel run.  
*Exception: Wing panels on 80"H runs must be 80"H.*


Wall- and Traxx-Mounted

General Guidelines:


The most stable configurations are those in which panels are tied to worksurfaces and pedestals.

Workstations that include pedestals can accommodate longer panel runs.


Configurations that include overhead storage carry heavier loads and work best on shorter panel runs with additional floor supports.



- Maximum 10' supported run:**
- Cantilever next to wall;
  - Cantilever in middle of run; and
  - Minimum width wing panel
- See minimum wing panel chart at right.



- Maximum 12' supported run:**
- Cantilever next to wall;
  - Cantilevers in middle of run;
  - Minimum width wing panel; and
  - Balanced back to back
- See minimum wing panel chart at right.



**Wall-mount brackets and Traxx starter kits** must be secured to the building wall by fastening into the stud or by using drywall fasteners. Selection and purchase of the proper attachment fasteners for your wall is the responsibility of the installer.

**Do not exceed** maximum panels in a run.

**Unsupported worksurface span** of 48"W for 13/16" worksurfaces or 60"W for 19/16" worksurfaces requires additional support such as a mid-support, support panel, or undersurface storage.

Statement of Line	➤ See page 14.2
Planning	14.4
Pricing	14.29
Surface Materials	14.93

Definitions:

**Unsupported panel runs:** Runs not attached on BOTH ends to a wall, panel run, or floor support.

**Floor support:** Undersurface storage units, support panels, or column legs

**Balanced back-to-back:** Runs having similar components mounted to opposite sides of the run so as to counter-balance the load.

Minimum Wing Panel Widths:


Minimum wing panel widths increase according to the height of the panel run. These minimum widths eliminate the possibility of tipping or injury under standard loading and usage. They are critical in unsupported (panel only) configurations.

Height of Panel Run	Minimum Wing Width
34", 42", or 48"	30"
54", 62", or 66"	36"
80"	48"

**IMPORTANT:** Wing panel height is not required to be the same height as the panel run.  
*Exception: Wing panels on 80"H runs must be 80"H.*

Stackable Panels


Statement of Line	➤ See page 14.2
Planning	14.4
Pricing	14.29
Surface Materials	14.93




One or two stackable panels may be stacked onto a base panel. Maximum height of any combination of base and stackable panels is 80".

Width of stackable panel must match the width of the base panel.

Panel run stability rules are the same for stackable panels as for standard Interworks EQ panels.  
➤ See pages 14.14–14.19.




For proper support, stackable panels must either turn a corner or be connected to a panel or finish channel that is equal to the height of the base panel plus the height of the stackable panel.




When creating a “step-down” or “cityscape” effect, stackable panels can only extend out one panel width from a connector, unless a stackable load bracket is used.

Wing panel must be equal to the combined height of the base panel plus the stackable panel.



First row of stackable fabric panels above the base panel can support overheads. Overheads cannot be mounted on the second row (top row) of stackable panels.  
➤ See page for stability rules.


Overheads mounted on 12" or 14" stackable panels will hang down on to the base panel.



Overheads cannot be hung in a row of stackable panels where a hi-lo trim kit is used. However, they may be hung in the row beneath the hi-lo application as shown above.

Stackable load brackets specified separately, are required at in-line stackable panel connections when mounting overheads on stackable panels on only one side of the run.

Stackable load brackets are not required when overheads are balanced back-to-back on stackable panels, nor at the connection to a finish channel (change of direction) or end trim (end of run).  
➤ See illustration at left.

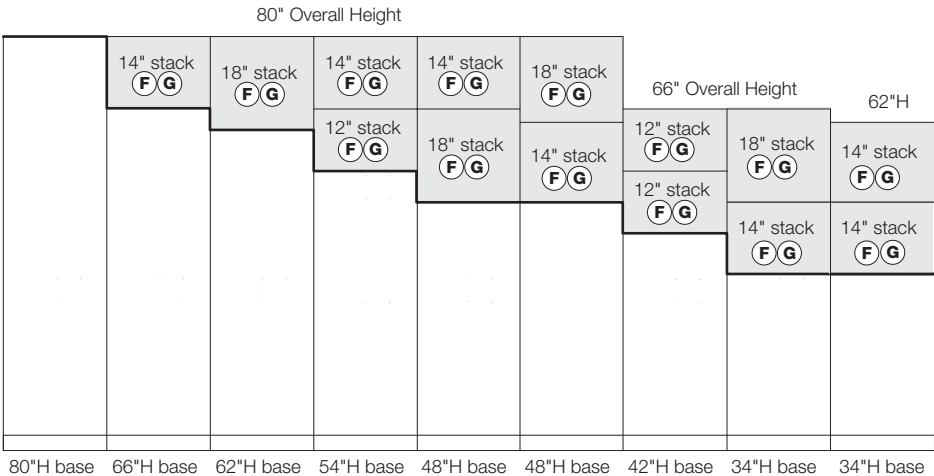

Key:  
(F) = Fabric  
(G) = Glass

Statement of Line	➤ See page 14.2
Planning	14.4
Pricing	14.29
Surface Materials	14.93

**Electrical system** is an 8-wire, 4-circuit system. Power is distributed through panels via wireways in the base.

**Top channel** provides a horizontal lay-in space for cable routing in the top of the panel, accommodating 22 1/4"-diameter cables at 40% fill.


**Base-to-mid-wireway jumper cable**, routed through the panel frame, distributes power from the base to the mid-wireway.

**Data cables** may be routed from the base to worksurface height in mid-wireway panels, up to the top channel or from the top channel down to the base through the vertical channels.

**Wireway** provides space at the base of the panel for power and data cable routing. Wireway is 1 15/16"D x 3 1/4"H.

**Power distribution assembly** in powered panels accepts up to four duplex receptacles.

**Base power entries** are available to bring power from the floor or wall.

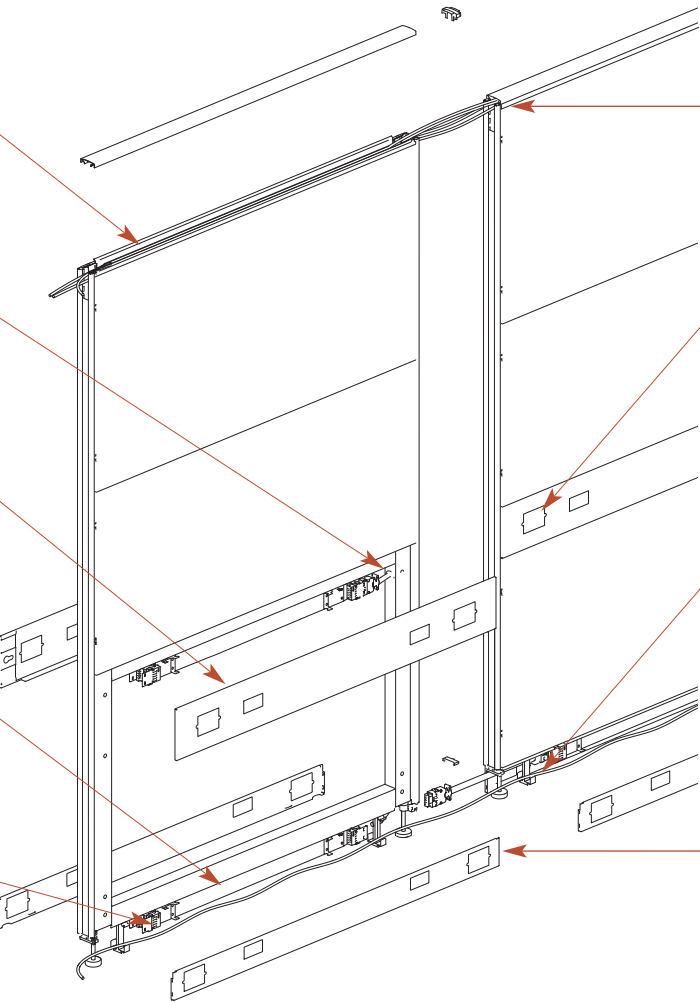

**Ceiling power entry and power pole** are available to bring power from the ceiling to the panel.

**Side rail cutout** allows cables to be routed to adjacent panels.

**Data port openings** (two per panel side, four per side on mid-wireway panels) provide access to data cabling. Interworks EQ cover plates or commercially purchased data ports and faceplates are required.

**Base wireway** can accommodate up to 8 1/4"-diameter data cables.

**Wireway cover** is removable to allow access to cavity in the panel base. Available punched and non-punched for power and data access.


**Wireway Cover Options:**

<b>NP2</b>	2 non-punched
<b>P1</b>	1 power punched 1 non-punched
<b>P2</b>	2 power punched
<b>PD1</b>	1 power & data punched 1 non-punched
<b>PD2</b>	2 power & data punched
<b>H1</b>	1 hardwire punched 1 non-punched
<b>H2</b>	2 hardwire punched
<b>HD1</b>	1 hardwire & data punched 1 non-punched
<b>HD2</b>	2 hardwire & data punched

**Punch Dimensions:**

Power: 2.71"W x 1.38"H  
Data: 3.00"W x 2.19"H

Statement of Line	➤ See page 14.2
Planning	14.4
Pricing	14.29
Surface Materials	14.93

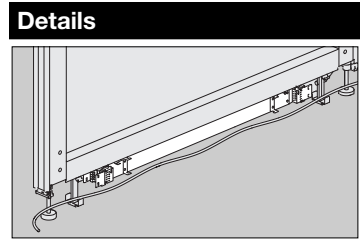

**Powered panels** feature factory-installed electrical distribution assemblies in the base wireway. Power can also be field-installed in non-powered panels.

**Mid-wireway sectional panels** feature factory-installed power distribution assemblies in both the base wireway and mid-wireway.


**Power distribution assemblies and receptacles** are the same for base and mid-wireway.

**Two wiring configurations** are possible—3 and 1 or 2 and 2—utilizing the same components.  
➤ See page 14.26 for planning and installation guidelines.



**Duplex receptacles** are rated at 15 amps and may be installed back-to-back in base and mid-wireways.

**Two data ports** can be installed in each wireway (two on one side or one on each side). There are four data port locations, however, data ports cannot be installed back to back. One data port location in the mid-wireway will be eliminated by the base-to-mid-wireway jumper.

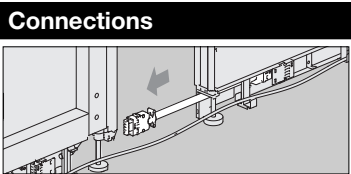

**Jumper cables** are used to pass power from panel to panel at the base and from base to mid-wireway. Power cannot be passed from panel to panel at the mid-wireway.

**Pass-thru jumper cables** are used to pass power through non-powered panels.

**18"W panels** have no electrical access; however, they can accept pass-thru jumper cables to pass power to adjacent panels.

**Building-to-panel power connections** can be accomplished whether the power source is in the wall, floor, or ceiling.  
➤ See page 14.23.

**Power and data poles** bring voice/data cables and electrical wiring from the ceiling to the panel run.  
➤ See page 14.23.

**Application Guidelines**  
**IMPORTANT: Planning actual power supplies and branch circuits** must be performed by qualified electricians or electrical engineers familiar with the National Electrical Code and the appropriate local codes. The information provided herein is intended to assist specifiers.

**New York City electrical applications** require a special power entry. Panels should be specified as non-powered and electrical distribution assemblies should be specified separately.  
➤ See page 14.25.

**Hardwire electrical components** for use in the base wireway are available for areas where local codes do not accept modular electrical plug-in components.  
➤ See page 14.24.

Receptacle Capacity per Panel:


Panel Width	Tackable Acoustical (Monolithic) Panels		Sectional Panels		Mid-Wireway Sectional Panels	
	Base Wireway	Total per Panel	Base Wireway	Total per Panel	Mid-Wireway	Total per Panel
18"	0	0	0	0	0	0
24"	1 per side	2	1 per side	2	1 per side	4*
30"-60"	2 per side	4	2 per side	4	2 per side	8*

\* Including receptacle locations in the base wireway.



Statement of Line	➤ See page 14.2
Planning	14.4
Pricing	14.29
Surface Materials	14.93

Details




**Base power entry** is available in straight, corner, end, and side models to bring power to the panel run from the floor or wall.



**Ceiling power entry assembly** is available to bring power to the panel run from the ceiling. It is used in conjunction with a power and data pole. Ceiling power entry assembly includes:

- Ceiling power entry
- Junction box
- 15' jumper cable
- Hardware

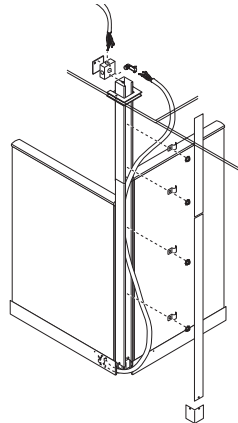

**Power/data poles** bring voice/data cables and/or electrical wiring from the ceiling to the panel. Poles include:

- Pole and cover
- Ceiling plate
- Appropriate base cover
- Alignment clip
- Fill caps

*Note: Ceiling power entry assembly must be specified separately.*

Application Guidelines

**IMPORTANT: Planning actual power supplies and branch circuits** must be performed by qualified electricians or electrical engineers familiar with the National Electrical Code and the appropriate local codes. The information provided herein is intended to assist specifiers.

**Access to ceiling power source** is regulated by National Electrical Code to a maximum of 12 ft. conduit.

**When using power pole with two ceiling power entry assemblies,** plan an extra pole for data cabling.

**18"W panels** have no electrical access. They can be used to pass power from one panel to another, but cannot accept receptacles or power entries.

**Power entries** will take up the space of one receptacle location on the power distribution assembly.

Related Products


**Hardwire electrical components** are available for areas where local codes do not accept modular electrical plug-in components.  
➤ See page 14.24.

**New York City electrical applications** require a New York City power assembly for the panel where power entry is made.  
➤ See page 14.25.


Statement of Line	➤ See page 14.2
Planning	14.4
Pricing	14.29
Surface Materials	14.93

Details

Interworks EQ tackable acoustical and sectional panels are available with a hardwire option. Components should be specified separately to accommodate hardwire applications. All duplex receptacles must be Leviton brand or equivalent for hardwire.




Hardwire panels ship with an internal wireway modified to accept the junction box and one or two punched wireway covers with modified access windows.



**Junction box kit**, specified separately, is required for each panel that will receive field-installed hardwired electrical. Junction box kit includes:

- Junction box
- Single duplex port per side on 24"W; two ports per side on other widths
- Two junction box end caps with knockouts to feed power in from the panel ends



**Side feed plate**, specified separately, enables power in-feed from the side into the junction box.



End



Corner



Straight

**Appropriate replacement wireway end cap** should be specified to in-feed power from the end or through a finish channel.

Connections

**Hardwire installations** must be completed by a qualified electrician or an electrical engineer familiar with the National Electrical Code and the appropriate local codes.

Application Guidelines

**IMPORTANT: Planning actual power supplies and branch circuits** must be performed by qualified electricians or electrical engineers familiar with the National Electrical Code and the appropriate local codes. The information provided herein is intended to assist specifiers.

**18"W panels** are not available with the hardwire option.

Hardwire Wireway Cover Options:

<b>H1</b>	1 hardwire punched 1 non-punched
<b>H2</b>	2 hardwire punched
<b>HD1</b>	1 hardwire & data punched 1 non-punched
<b>HD2</b>	2 hardwire & data punched

Punch Dimensions:

Power: 2.71"W x 1.38"H  
Data: 3.00"W x 2.19"H


Statement of Line	➤ See page 14.2
Planning	14.4
Pricing	14.29
Surface Materials	14.93

Details

Interworks EQ tackable acoustical and sectional panels can be modified to meet New York City electrical code.

**New York City electrical power assembly** is available for field installation in each starter panel—those into which power from the building will be connected. The starter panel can then be hardwired in the field by a qualified electrician. New York City power assembly is only required in the starter panel. It is not available for use in 18"W or 24"W panels.

**Mid-wireway panels** are not available with New York City power option.

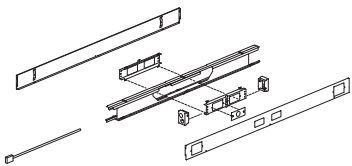

For 30"–60"W Panels

**New York City power assembly** includes:

- Internal panel wireway
- Jumper cable
- Junction box
- Interface plate
- Two junction box end caps
- Wireway covers

**New York City power assemblies are different** depending on the width of the panel as illustrated above.

Connections

**Duplex receptacles** are not accommodated in panels with New York City power assembly.

**Data ports** can be installed in panels with New York City power assembly.


Application Guidelines

**IMPORTANT: Planning actual power supplies and branch circuits** must be performed by qualified electricians or electrical engineers familiar with the National Electrical Code and the appropriate local codes. The information provided herein is intended to assist specifiers.


## Circuit Configurations

Planning

### Shared Neutral 8-Wire Power System



**Interworks EQ 8-wire, 4-circuit power system** supports work environments having light- to medium-intensity computerized equipment needs. The 8-wire systems include two 12-gauge ground wires, two 10-gauge neutral wires, and four 12-gauge hot wires.

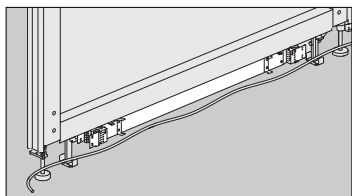

**Powered panels** feature factory-installed electrical distribution assemblies in the base wireway. Power can be field-installed on non-powered panels.  
➤ See page 14.29.

**Building-to-panel electrical connections** can be accomplished from power sources in the wall, floor, or ceiling.  
➤ See page 14.23.


**Two wiring configurations** are possible—3 and 1 or 2 and 2—utilizing the same components.  
➤ See wiring configurations at right.

**Duplex receptacles** used for both types of wiring configurations are the same. This simplifies specifications and allows a faster understanding of the system.  
➤ See page 14.22.

**IMPORTANT: Planning actual power supplies and branch circuits** must be performed by qualified electricians or electrical engineers familiar with the National Electrical Code and the appropriate local codes. The information provided herein is intended to assist specifiers.

**Installations** should be in accordance with the NEC. Local codes may vary. Consult a qualified electrical contractor or engineer for proper installation of electrical equipment. Hardware necessary for installation is shipped with all components.

#### 3 and 1 (8-wire):

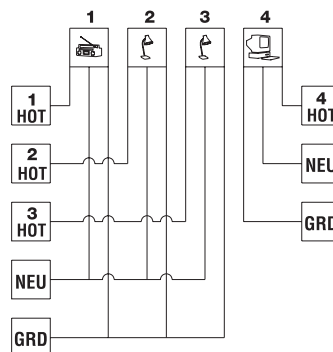


- Three utility circuits share a neutral and common ground.
- One circuit with a DEDICATED hot, neutral and ground.
- Utilize Interworks EQ receptacles #1, 2, 3 for utility and #4 for the DEDICATED ground circuit.

Circuits 1, 2, and 3 can be used for general electrical needs. Customarily, one or more of the circuits is reserved for lighting or other everyday uses, which allows control by central or master switching.

Circuit 4 consists of three separate conductors (hot, neutral, and ground) and meets the BIFMA/ANSI definition for a dedicated circuit.

#### 2 and 2 (8-wire):



- Two DESIGNATED utility circuits and two DESIGNATED computer circuits.
- Utilize Interworks EQ receptacles #1 and #2 for the designated utility circuits and receptacles #4 and #5 for the designated computer circuits.

*Note: Receptacle #3 cannot be used in the 2 and 2 configuration. If receptacle #3 is used, possible cross feed or interference from utility circuits one and two can be introduced to computer circuits.*

Circuits 1 and 2 provide a pair of designated circuits for general electrical needs, as described for the 3 & 1.

Circuits 4 and 5 provide a pair of designated circuits for computer applications.

Statement of Line	➤ See page 14.2
Planning	14.4
Pricing	14.29
Surface Materials	14.93

#### Approval/Compliance:

Interworks EQ's electrical system is UL approved, complies with the National Electrical Code (NEC), and is certified for electrical safety to Canadian Standards Association (CSA) standard C22.1 No. 203.  
*Note: Any field modification of the electrical components voids the UL listing.*

Wiring Diagrams


Planning

Statement of Line	➤ See page 14.2
Planning	14.4
Pricing	14.29
Surface Materials	14.93

Provide these wiring diagrams to the electrical contractor.


Interworks EQ 3 and 1 Configuration 8-Wire:

120/208V WYE 3 Phase 8-10 Shared Neutral  
Receptacles: 1, 2, 3, and 4 (or 4Δ)

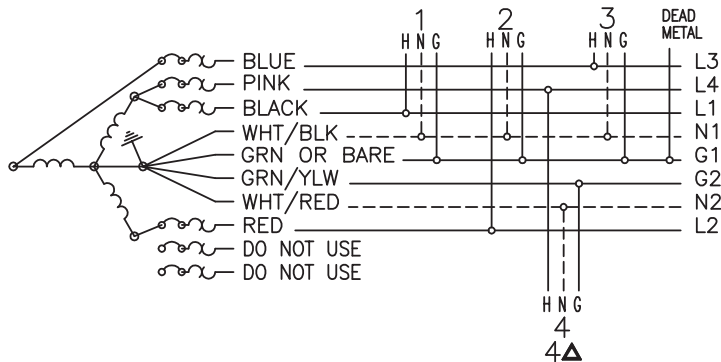


Interworks EQ 2 and 2 Configuration 8-Wire

120/208V WYE 3 Phase 8-10 Shared Neutral  
Receptacles: 1, 2, 4, and 5 (or 1, 2, 3Δ, and 4Δ)

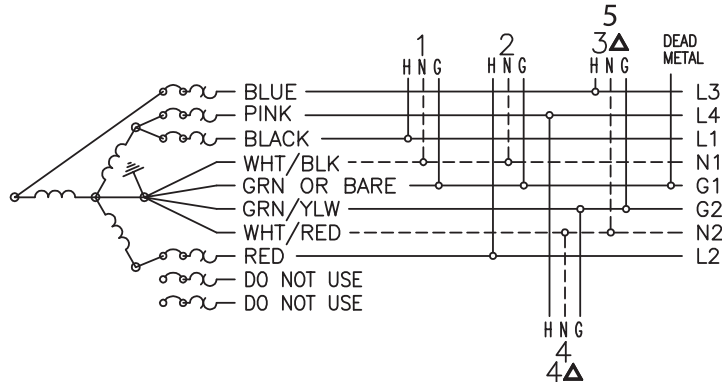


Interworks EQ 2 and 1 Configuration 8-Wire

120/240V 1 Phase 8-10 Shared Neutral  
Receptacles: 1, 3, and 4 (or 4Δ)

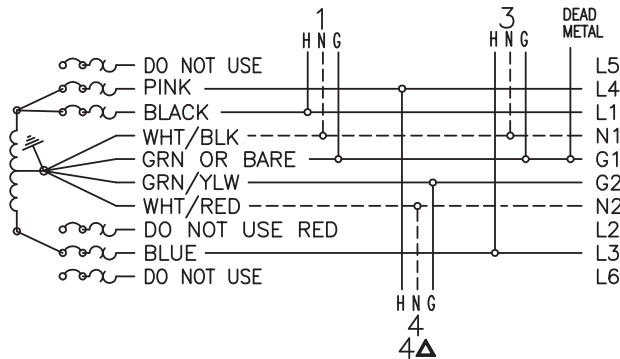

- Communication and data cables** can be routed:
- Through top channel of panels,
  - Through verticals to the base wireway.
  - Through the base wireway, or
  - From the base wireway up to mid-height



**Cable hanger** allows data cables to be routed through the base wireway.


**Base wireways** can have up to two data port openings on each side of the panel.

**Mid-wireway panels** can have up to four data port openings on each side of the panel: two in the base and two at worksurface height. However, base-to-mid-wireway jumper will eliminate access to one data port opening in the base and one in the mid-wireway.

**Data ports** cannot be installed back to back unless surface mounted ports are purchased commercially.

**When purchasing data ports commercially**, verify that the depth of the port and size of cover plate are appropriate for proper fit. Data ports can be purchased through the port manufacturer or their distribution network. Data ports up to 1 1/2"D can be accommodated provided the data port is on Side 1 and the jumper is on Side 2 or there is no electrical jumper.

**Consider the cable bend radius** when planning the routing of data cables through Interworks EQ panels at panel-to-panel connections or within the panel.

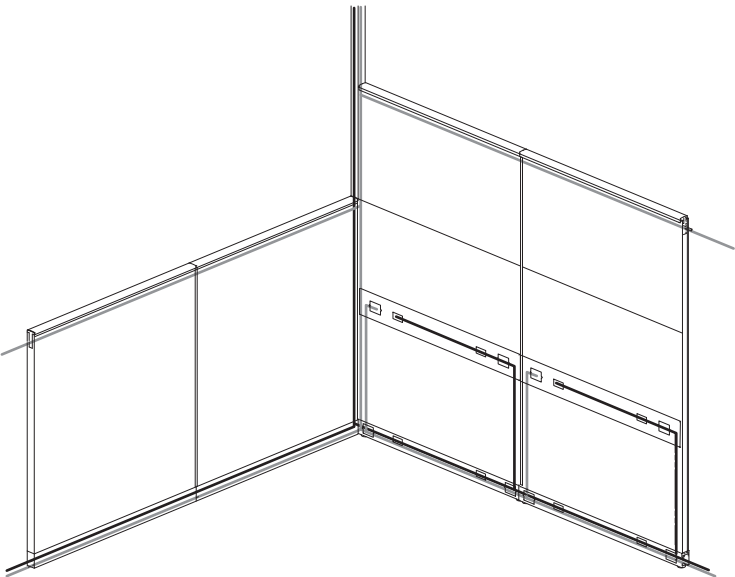

	Min. Radius	Max. Radius
Top Channel to Vertical Channel	1/2"	1 1/2"
Top Channel Panel-to-Panel at 90°	1/2"	1 1/2"
Vertical Channel to Base Wireway	1"	2"
Mid-Wireway to Vertical Channel	1/2"	1 1/2"

**Panel-to-panel capacity** is limited by the top channel cutout and is 11 at 40% fill or 16 at 60% fill..

Statement of Line	➤ See page 14.2
Planning	14.4
Pricing	14.29
Surface Materials	14.93

**Cable Capacities:**

	1/4"-diameter cables* at 40% Fill
Base Wireway	8
Top Channel	
–Acoustical	22
–Sectional	22
–Full Glass	22
Panel-to-panel	11
Vertical Channel	
–Acoustical	13
–Sectional	13
Mid-Wireway	8

\* Cable capacities are based on 1/4"-diameter Cat5 or Cat 6 (4-pair UTP) cables.

**Punch Dimensions:**

Data: 3.00"W x 2.19"H

**Related Products:**

Vertical cable managers are available separately to conceal task light cords.  
➤ See page 14.92 to specify.

## Tackable Acoustical Panels

34" and 42"H

Pricing

GSA SIN 711-1  
COM GSA Non-Contract



18"W panel is available non-powered only; does not accept power entry or receptacles.

Use an electronic specification tool for accurate pricing when specifying two different fabric grades on a panel.

Finish channels (required for change-of-direction)  
➤ See page 14.71.

In-line connector kits (required for each in-line connection)  
➤ See page 14.76.

End trim (required for finished look at end of panel runs)  
➤ See page 14.78.

Electrical components  
➤ See page 14.83.

				Powered		Non-Powered	
D	W	H	Model	Fabric Price	Grade	Fabric Price	Grade
				A or COM	B	A or COM	B
34"H Panels							
2"	18"	341/4"	11P1834A	—	—	\$444	\$474
	24"		11P2434A	\$641	\$671	483	513
	30"		11P3034A	678	718	519	549
	36"		11P3634A	711	767	554	610
	42"		11P4234A	756	812	599	655
	48"		11P4834A	781	837	623	679
	60"		11P6034A	922	978	766	822
42"H Panels							
2"	18"	421/4"	11P1842A	—	—	\$504	\$544
	24"		11P2442A	\$735	\$775	577	617
	30"		11P3042A	786	816	629	669
	36"		11P3642A	855	923	698	766
	42"		11P4242A	905	983	744	822
	48"		11P4842A	942	1012	782	852
	60"		11P6042A	1089	1159	929	999

Statement of Line	➤ See page 14.2
Planning	14.4
Pricing	14.29
Surface Materials	14.93

### Standard Includes

- Top cap
- Two wireway covers
- Two panel hinges
- Two panel glides
- Carpet grippers
- Power distribution assembly on powered panels

### How to Specify

- 1 Model
- 2 Power option:  
P = Powered  
N = Non-powered  
H = Hardwired (+\$70 to non-powered)
- 3 Top cap material:  
P = Paint
- 4 Type of power system (omit for non-powered and hardwired):  
84 = 8-wire, 4-circuit
- 5 Top cap profile:  
C = Crowned
- 6 Wireway cover punch option (omit for 18"W):  
➤ See page 14.21 for designators.
- 7 Trim finish designator:  
Paint number or  
501 = Platinum Metallic (+10%)
- 8 Hinge color designator
- 9 Side 1 fabric grade
- 10 Side 1 fabric number
- 11 Side 2 fabric grade
- 12 Side 2 fabric number



## Tackable Acoustical Panels

48" and 54"H

Pricing

GSA SIN 711-1  
COM GSA Non-Contract



18"W panel is available non-powered only; does not accept power entry or receptacles.

Use an electronic specification tool for accurate pricing when specifying two different fabric grades on a panel.

Finish channels (required for change-of-direction)  
➤ See page 14.71.

In-line connector kits (required for each in-line connection)  
➤ See page 14.76.

End trim (required for finished look at end of panel runs)  
➤ See page 14.78.

Electrical components  
➤ See page 14.83.

				Powered		Non-Powered	
				Fabric Price Grade		Fabric Price Grade	
D	W	H	Model	A or COM	B	A or COM	B
48"H Panels							
2"	18"	48¼"	11P1848A	—	—	\$584	\$628
	24"		11P2448A	\$820	\$864	661	705
	30"		11P3048A	884	928	727	771
	36"		11P3648A	957	1025	801	869
	42"		11P4248A	1030	1108	873	951
	48"		11P4848A	1070	1156	912	998
	60"		11P6048A	1241	1327	1084	1170
54"H Panels							
2"	18"	54¼"	11P1854A	—	—	\$603	\$651
	24"		11P2454A	\$830	\$878	671	719
	30"		11P3054A	902	950	740	788
	36"		11P3654A	981	1049	820	888
	42"		11P4254A	1055	1133	893	971
	48"		11P4854A	1093	1179	933	1019
	60"		11P6054A	1260	1358	1100	1198

Statement of Line	➤ See page 14.2
Planning	14.4
Pricing	14.29
Surface Materials	14.93

### Standard Includes

- Top cap
- Two wireway covers
- Two panel hinges
- Two panel glides
- Carpet grippers
- Power distribution assembly on powered panels

### How to Specify

- ① Model
- ② Power option:  
P = Powered  
N = Non-powered  
H = Hardwired (+\$70 to non-powered)
- ③ Top cap material:  
P = Paint
- ④ Type of power system (omit for non-powered and hardwired):  
84 = 8-wire, 4-circuit
- ⑤ Top cap profile:  
C = Crowned
- ⑥ Wireway cover punch option (omit for 18"W):  
➤ See page 14.21 for designators.
- ⑦ Trim finish designator:  
Paint number or  
501 = Platinum Metallic (+10%)
- ⑧ Hinge color designator
- ⑨ Side 1 fabric grade
- ⑩ Side 1 fabric number
- ⑪ Side 2 fabric grade
- ⑫ Side 2 fabric number

## Tackable Acoustical Panels

62" and 66"H

Pricing

GSA SIN 711-1  
COM GSA Non-Contract



18"W panel is available non-powered only; does not accept power entry or receptacles.

Use an electronic specification tool for accurate pricing when specifying two different fabric grades on a panel.

Finish channels (required for change-of-direction)  
➤ See page 14.71.

In-line connector kits (required for each in-line connection)  
➤ See page 14.76.

End trim (required for finished look at end of panel runs)  
➤ See page 14.78.

Electrical components  
➤ See page 14.83.

				Powered		Non-Powered	
				Fabric Price Grade		Fabric Price Grade	
D	W	H	Model	A or COM	B	A or COM	B
62"H Panels							
2"	18"	62 1/4"	11P1862A	—	—	\$626	\$674
	24"		11P2462A	\$843	\$891	686	734
	30"		11P3062A	922	978	766	822
	36"		11P3662A	1015	1083	855	923
	42"		11P4262A	1075	1153	918	996
	48"		11P4862A	1125	1211	965	1051
	60"		11P6062A	1277	1389	1118	1230
66"H Panels							
2"	18"	66 1/4"	11P1866A	—	—	\$691	\$739
	24"		11P2466A	\$920	\$968	760	808
	30"		11P3066A	1030	1086	873	929
	36"		11P3666A	1118	1186	962	1030
	42"		11P4266A	1178	1256	1019	1097
	48"		11P4866A	1224	1310	1064	1150
	60"		11P6066A	1386	1498	1227	1339

Statement of Line	➤ See page 14.2
Planning	14.4
Pricing	14.29
Surface Materials	14.93

### Standard Includes

- Top cap
- Two wireway covers
- Two panel hinges
- Two panel glides
- Carpet grippers
- Power distribution assembly on powered panels

### How to Specify


- 1 Model
- 2 Power option:  
P = Powered  
N = Non-powered  
H = Hardwired (+\$70 to non-powered)
- 3 Top cap material:  
P = Paint
- 4 Type of power system (omit for non-powered and hardwired):  
84 = 8-wire, 4-circuit
- 5 Top cap profile:  
C = Crowned
- 6 Wireway cover punch option (omit for 18"W):  
➤ See page 14.21 for designators.
- 7 Trim finish designator:  
Paint number or  
501 = Platinum Metallic (+10%)
- 8 Hinge color designator
- 9 Side 1 fabric grade
- 10 Side 1 fabric number
- 11 Side 2 fabric grade
- 12 Side 2 fabric number

## Tackable Acoustical Panels

Pricing

80"H

GSA SIN 711-1  
COM GSA Non-Contract



18"W panel is available non-powered only; does not accept power entry or receptacles.

Use an electronic specification tool for accurate pricing when specifying two different fabric grades on a panel.

Finish channels (required for change-of-direction)  
➤ See page 14.71.

In-line connector kits (required for each in-line connection)  
➤ See page 14.76.

End trim (required for finished look at end of panel runs)  
➤ See page 14.78.

Electrical components  
➤ See page 14.83.

				Powered		Non-Powered			
D	W	H	Model	Fabric	Price	Grade	Fabric	Price	Grade
				A or COM		B	A or COM		B
80"H Panels									
2"	18"	80 1/4"	11P1880A		—	—		\$928	\$998
	24"		11P2480A		\$1160	\$1230		1002	1072
	30"		11P3080A		1229	1299		1068	1138
	36"		11P3680A		1306	1448		1148	1290
	42"		11P4280A		1421	1563		1262	1404
	48"		11P4880A		1461	1603		1305	1447


Statement of Line	➤ See page 14.2
Planning	14.4
Pricing	14.29
Surface Materials	14.93

### Standard Includes

- Top cap
- Two wireway covers
- Two panel hinges
- Two panel glides
- Carpet grippers
- Power distribution assembly on powered panels

### How to Specify

- 1 Model
- 2 Power option:  
P = Powered  
N = Non-powered  
H = Hardwired (+\$70 to non-powered)
- 3 Top cap material:  
P = Paint
- 4 Type of power system (omit for non-powered and hardwired):  
84 = 8-wire, 4-circuit
- 5 Top cap profile:  
C = Crowned
- 6 Wireway cover punch option (omit for 18"W):  
➤ See page 14.21 for designators.
- 7 Trim finish designator:  
Paint number or  
501 = Platinum Metallic (+10%)
- 8 Hinge color designator
- 9 Side 1 fabric grade
- 10 Side 1 fabric number
- 11 Side 2 fabric grade
- 12 Side 2 fabric number



## Full Glass Panels

## Pricing

GSA SIN 711-1  
COM GSA Non-Contract

<i>D</i>	<i>W</i>	<i>H</i>	<i>Model</i>	<i>Price</i>
<b>62"H Panels</b>				
2"	24"	62¼"	<b>11P2462G</b>	\$1250
	30"		<b>11P3062G</b>	1364
	36"		<b>11P3662G</b>	1476
<b>66"H Panels</b>				
2"	24"	66¼"	<b>11P2466G</b>	\$1278
	30"		<b>11P3066G</b>	1393
	36"		<b>11P3666G</b>	1531
<b>80"H Panels</b>				
2"	24"	80¼"	<b>11P2480G</b>	\$1487
	30"		<b>11P3080G</b>	1615
	36"		<b>11P3680G</b>	1776

Full glass panels are available non-powered only.

Finish channels (required for change-of-direction)  
➤ See page 14.71.

In-line connector kits (required for each in-line connection)  
➤ See page 14.76.

End trim (required for finished look at end of panel runs)  
➤ See page 14.78.

Statement of Line	➤ See page 14.2
Planning	14.4
Pricing	14.29
Surface Materials	14.93

### Standard Includes

- Top cap
- Two wireway covers
- Two panel hinges
- Two panel glides
- Carpet grippers

### How to Specify


- 1 Model
- 2 Power option:  
**N** = Non-powered
- 3 Top cap material:  
**P** = Paint
- 4 Top cap profile:  
**C** = Crowned
- 5 Glass option:  
**3** = Clear  
**9** = Frosted (+\$66)
- 6 Wireway cover punch option:  
**NP2** = 2 covers, non-punched
- 7 Trim finish designator:  
Paint number or  
**501** = Platinum Metallic (+10%)
- 8 Hinge color designator

Sectional Panels

Pricing

Two Tiles per Side—Fabric/Fabric

GSA SIN 711-1  
COM GSA Non-Contract



				Powered		Non-Powered	
D	W	H	Model	Fabric	Price Grade	Fabric	Price Grade
				A or COM	B	A or COM	B
34"H							
2"	18"	34¼"	11P1834SFF	—	—	\$581	\$693
	24"		11P2434SFF	\$797	\$909	631	743
	30"		11P3034SFF	839	951	672	784
	36"		11P3634SFF	876	988	710	822
	42"		11P4234SFF	925	1037	763	875
	48"		11P4834SFF	962	1074	799	911

18"W panel is available non-powered only; does not accept power entry or receptacles.

Fabric selected for side will apply to all tiles.

Use an electronic specification tool for accurate pricing when specifying two different fabric grades on a panel.

Statement of Line	➤ See page 14.2
Planning	14.4
Pricing	14.29
Surface Materials	14.93

Standard Includes

- Top cap
- Two fabric tiles per side
- Two wireway covers
- Two panel hinges
- Two panel glides
- Carpet grippers
- Power distribution assembly on powered panels

How to Specify



- 1 Model
- 2 Power option:  
P = Powered  
N = Non-powered  
H = Hardwired (+\$70 to non-powered)
- 3 Top cap material:  
P = Paint
- 4 Type of power system (omit for non-powered and hardwired):  
84 = 8-wire, 4-circuit
- 5 Top cap profile:  
C = Crowned
- 6 Wireway cover punch option (omit for 18"W):  
➤ See page 14.21 for designators.
- 7 Trim finish designator:  
Paint number or  
501 = Platinum Metallic (+10%)
- 8 Hinge color designator
- 9 Side 1 fabric grade
- 10 Side 1 fabric number
- 11 Side 2 fabric grade
- 12 Side 2 fabric number

## Sectional Panels

## Pricing

Three Tiles per Side—Fabric/Fabric/Fabric

GSA SIN 711-1  
COM GSA Non-Contract



D	W	H	Model	Powered		Non-Powered	
				Fabric Price	Grade	Fabric Price	Grade
				A or COM	B	A or COM	B
<b>42"H</b>							
2"	18"	42 1/4"	<b>11P1842SFFF</b>	—	—	\$721	\$889
	24"		<b>11P2442SFFF</b>	\$965	\$1133	803	971
	30"		<b>11P3042SFFF</b>	1028	1196	862	1030
	36"		<b>11P3642SFFF</b>	1087	1255	922	1090
	42"		<b>11P4242SFFF</b>	1149	1317	987	1155
	48"		<b>11P4842SFFF</b>	1203	1371	1038	1206
<b>48"H</b>							
2"	18"	48 1/4"	<b>11P1848SFFF</b>	—	—	\$861	\$1029
	24"		<b>11P2448SFFF</b>	\$1107	\$1275	945	1113
	30"		<b>11P3048SFFF</b>	1175	1343	1010	1178
	36"		<b>11P3648SFFF</b>	1238	1406	1073	1241
	42"		<b>11P4248SFFF</b>	1318	1486	1153	1321
	48"		<b>11P4848SFFF</b>	1373	1541	1208	1376

➤ See next page for 54"H fabric/fabric/fabric models.

18"W panel is available non-powered only; does not accept power entry or receptacles.

Fabric selected for side will apply to all tiles.

Use an electronic specification tool for accurate pricing when specifying two different fabric grades on a panel.

Statement of Line	➤ See page 14.2
Planning	14.4
Pricing	14.29
Surface Materials	14.93

### Standard Includes

- Top cap
- Three fabric tiles per side
- Two wireway covers
- Two panel hinges
- Two panel glides
- Carpet grippers
- Power distribution assembly on powered panels

### How to Specify


- 1 Model
- 2 Power option:  
P = Powered  
N = Non-powered  
H = Hardwired (+\$70 to non-powered)
- 3 Top cap material:  
P = Paint
- 4 Type of power system (omit for non-powered and hardwired):  
84 = 8-wire, 4-circuit
- 5 Top cap profile:  
C = Crowned
- 6 Wireway cover punch option (omit for 18"W):  
➤ See page 14.21 for designators.
- 7 Trim finish designator:  
Paint number or  
501 = Platinum Metallic (+10%)
- 8 Hinge color designator
- 9 Side 1 fabric grade
- 10 Side 1 fabric number
- 11 Side 2 fabric grade
- 12 Side 2 fabric number

## Sectional Panels

## Pricing

Three Tiles per Side—Fabric/Fabric/Fabric, continued

GSA SIN 711-1  
COM GSA Non-Contract



				Powered		Non-Powered	
D	W	H	Model	Fabric	Price Grade	Fabric	Price Grade
				A or COM	B	A or COM	B
54"H							
2"	18"	54¼"	11P1854SFFF	—	—	\$892	\$1060
	24"		11P2454SFFF	\$1137	\$1305	970	1138
	30"		11P3054SFFF	1207	1375	1043	1211
	36"		11P3654SFFF	1277	1445	1113	1281
	42"		11P4254SFFF	1354	1522	1191	1359
	48"		11P4854SFFF	1420	1588	1254	1422

18"W panel is available non-powered only; does not accept power entry or receptacles.

Fabric selected for side will apply to all tiles.

Use an electronic specification tool for accurate pricing when specifying two different fabric grades on a panel.

Statement of Line	➤ See page 14.2
Planning	14.4
Pricing	14.29
Surface Materials	14.93

### Standard Includes

- Top cap
- Three fabric tiles per side
- Two wireway covers
- Two panel hinges
- Two panel glides
- Carpet grippers
- Power distribution assembly on powered panels

### How to Specify

- 1 Model
- 2 Power option:  
P = Powered  
N = Non-powered  
H = Hardwired (+\$70 to non-powered)
- 3 Top cap material:  
P = Paint
- 4 Type of power system (omit for non-powered and hardwired):  
84 = 8-wire, 4-circuit
- 5 Top cap profile:  
C = Crowned
- 6 Wireway cover punch option (omit for 18"W):  
➤ See page 14.21 for designators.
- 7 Trim finish designator:  
Paint number or  
501 = Platinum Metallic (+10%)
- 8 Hinge color designator
- 9 Side 1 fabric grade
- 10 Side 1 fabric number
- 11 Side 2 fabric grade
- 12 Side 2 fabric number





## Sectional Panels

Pricing

Three Tiles per Side—Fabric/Metal/Fabric

GSA SIN 711-1  
COM GSA Non-Contract



				Powered		Non-Powered	
<i>D</i>	<i>W</i>	<i>H</i>	<i>Model</i>	<i>Fabric Price Grade</i>	<i>Fabric Price Grade</i>	<i>Fabric Price Grade</i>	<i>Fabric Price Grade</i>
				<i>A or COM</i>	<i>B</i>	<i>A or COM</i>	<i>B</i>
42"H							
2"	18"	42¼"	11P1842SFMF	—	—	\$721	\$833
	24"		11P2442SFMF	\$965	\$1077	803	915
	30"		11P3042SFMF	1028	1140	862	974
	36"		11P3642SFMF	1087	1199	922	1034
	42"		11P4242SFMF	1149	1261	987	1099
	48"		11P4842SFMF	1203	1315	1038	1150
48"H							
2"	18"	48¼"	11P1848SFMF	—	—	\$861	\$973
	24"		11P2448SFMF	\$1107	\$1219	945	1057
	30"		11P3048SFMF	1175	1287	1010	1122
	36"		11P3648SFMF	1238	1350	1073	1185
	42"		11P4248SFMF	1318	1430	1153	1265
	48"		11P4848SFMF	1373	1485	1208	1320

➤ See next page for 54"H fabric/fabric/fabric models.

18"W panel is available non-powered only; does not accept power entry or receptacles.

Fabric selected for side will apply to all tiles.

Metal pattern selected will apply to both metal tiles.

Statement of Line	➤ See page 14.2
Planning	14.4
Pricing	14.29
Surface Materials	14.93

### Standard Includes

- Top cap
- Two fabric tiles per side
- One metal tile per side
- Two base wireway covers
- Two panel hinges
- Two panel glides
- Carpet grippers
- Power distribution assembly on powered panels

### How to Specify


- 1 Model
- 2 Power option:  
P = Powered  
N = Non-powered  
H = Hardwired (+\$70 to non-powered)
- 3 Top cap material:  
P = Paint
- 4 Type of power system (omit for non-powered and hardwired):  
84 = 8-wire, 4-circuit
- 5 Top cap profile:  
C = Crowned
- 6 Wireway cover punch option (omit for 18"W):  
➤ See page 14.21 for designators.
- 7 Metal pattern:  
D = Bordered  
S = Smooth
- 8 Trim finish designator:  
Paint number or  
501 = Platinum Metallic (+10%)
- 9 Hinge color designator
- 10 Side 1 fabric grade
- 11 Side 1 fabric number
- 12 Side 2 fabric grade
- 13 Side 2 fabric number

## Sectional Panels

Pricing

Three Tiles per Side—Fabric/Metal/Fabric, continued

GSA SIN 711-1  
COM GSA Non-Contract



				Powered		Non-Powered	
<i>D</i>	<i>W</i>	<i>H</i>	<i>Model</i>	<i>Fabric Price</i> <i>A or COM</i>	<i>Grade</i> <i>B</i>	<i>Fabric Price</i> <i>A or COM</i>	<i>Grade</i> <i>B</i>
54"H							
2"	18"	54¼"	11P1854SFMF	—	—	\$892	\$1004
	24"		11P2454SFMF	\$1137	\$1249	970	1082
	30"		11P3054SFMF	1207	1319	1043	1155
	36"		11P3654SFMF	1277	1389	1113	1225
	42"		11P4254SFMF	1354	1466	1191	1303
	48"		11P4854SFMF	1420	1532	1254	1366

18"W panel is available non-powered only; does not accept power entry or receptacles.

Fabric selected for side will apply to all tiles.

Metal pattern selected will apply to both metal tiles.

Statement of Line	➤ See page 14.2
Planning	14.4
Pricing	14.29
Surface Materials	14.93

### Standard Includes

- Top cap
- Two fabric tiles per side
- One metal tile per side
- Two base wireway covers
- Two panel hinges
- Two panel glides
- Carpet grippers
- Power distribution assembly on powered panels

### How to Specify




- 1 Model
- 2 Power option:  
P = Powered  
N = Non-powered  
H = Hardwired (+\$70 to non-powered)
- 3 Top cap material:  
P = Paint
- 4 Type of power system (omit for non-powered and hardwired):  
84 = 8-wire, 4-circuit
- 5 Top cap profile:  
C = Crowned
- 6 Wireway cover punch option (omit for 18"W):  
➤ See page 14.21 for designators.
- 7 Metal pattern:  
D = Bordered  
S = Smooth
- 8 Trim finish designator:  
Paint number or  
501 = Platinum Metallic (+10%)
- 9 Hinge color designator
- 10 Side 1 fabric grade
- 11 Side 1 fabric number
- 12 Side 2 fabric grade
- 13 Side 2 fabric number

## Sectional Panels

## Pricing

Three Tiles per Side—Fabric/Mid-Wireway/Fabric

GSA SIN 711-1  
COM GSA Non-Contract



				Powered		Non-Powered	
D	W	H	Model	Fabric Price	Grade	Fabric Price	Grade
				A or COM	B	A or COM	B
42"H							
2"	24"	42¼"	11P2442SFWF	\$1025	\$1137	—	—
	30"		11P3042SFWF	1077	1189	—	—
	36"		11P3642SFWF	1130	1242	—	—
	42"		11P4242SFWF	1184	1296	—	—
	48"		11P4842SFWF	1229	1341	—	—
48"H							
2"	24"	48¼"	11P2448SFWF	\$1168	\$1280	—	—
	30"		11P3048SFWF	1227	1339	—	—
	36"		11P3648SFWF	1282	1394	—	—
	42"		11P4248SFWF	1354	1466	—	—
	48"		11P4848SFWF	1399	1511	—	—
54"H							
2"	24"	54¼"	11P2454SFWF	\$1197	\$1309	—	—
	30"		11P3054SFWF	1258	1370	—	—
	36"		11P3654SFWF	1321	1433	—	—
	42"		11P4254SFWF	1389	1501	—	—
	48"		11P4854SFWF	1446	1558	—	—

Fabric selected for side will apply to all tiles.

Mid-wireway cover pattern selected will apply to both mid-wireway covers.

Use an electronic specification tool for accurate pricing when specifying two different fabric grades on a panel.

Statement of Line	➤ See page 14.2
Planning	14.4
Pricing	14.29
Surface Materials	14.93

### Standard Includes

- Top cap
- Two fabric tiles per side
- Two mid-wireway covers
- Two base wireway covers
- Two panel hinges
- Two panel glides
- Carpet grippers
- Two power distribution assemblies
- Base to mid-wireway jumper

### How to Specify


- 1 Model
- 2 Power option:  
**P** = Powered
- 3 Top cap material:  
**P** = Paint
- 4 Type of power system:  
**84** = 8-wire, 4-circuit
- 5 Top cap profile:  
**C** = Crowned
- 6 Base wireway cover punch option:  
➤ See page 14.21 for designators.
- 7 Mid-wireway cover punch option:  
➤ See page 14.21 for designators.
- 8 Mid-wireway cover pattern:  
**D** = Bordered  
**S** = Smooth
- 9 Trim finish designator:  
Paint number or  
**501** = Platinum Metallic (+10%)
- 10 Hinge color designator
- 11 Side 1 fabric grade
- 12 Side 1 fabric number
- 13 Side 2 fabric grade
- 14 Side 2 fabric number

## Sectional Panels

Pricing

Three Tiles per Side—Glass/Fabric/Fabric

GSA SIN 711-1  
COM GSA Non-Contract



D	W	H	Model	Powered		Non-Powered	
				Fabric Price Grade		Fabric Price Grade	
				A or COM	B	A or COM	B
48"H							
2"	18"	48¼"	11P1848SGFF	—	—	\$915	\$1027
	24"		11P2448SGFF	\$1163	\$1275	998	1110
	30"		11P3048SGFF	1230	1342	1067	1179
	36"		11P3648SGFF	1295	1407	1130	1242
	42"		11P4248SGFF	1382	1494	1216	1328
	48"		11P4848SGFF	1438	1550	1275	1387
54"H							
2"	18"	54¼"	11P1854SGFF	—	—	\$953	\$1065
	24"		11P2454SGFF	\$1194	\$1306	1032	1144
	30"		11P3054SGFF	1267	1379	1103	1215
	36"		11P3654SGFF	1345	1457	1179	1291
	42"		11P4254SGFF	1426	1538	1262	1374
	48"		11P4854SGFF	1488	1600	1322	1434

18"W panel is available non-powered only; does not accept power entry or receptacles.

Fabric selected for side will apply to all tiles.

Use an electronic specification tool for accurate pricing when specifying two different fabric grades on a panel.

Statement of Line	➤ See page 14.2
Planning	14.4
Pricing	14.29
Surface Materials	14.93

### Standard Includes

- Top cap
- Two fabric tiles per side
- One glass tile
- Two base wireway covers
- Two panel hinges
- Two panel glides
- Carpet grippers
- Power distribution assembly on powered panels

### How to Specify



- 1 Model
- 2 Power option:  
P = Powered  
N = Non-powered  
H = Hardwired (+\$70 to non-powered)
- 3 Top cap material:  
P = Paint
- 4 Type of power system (omit for non-powered and hardwired):  
84 = 8-wire, 4-circuit
- 5 Top cap profile:  
C = Crowned
- 6 Wireway cover punch option (omit for 18"W):  
➤ See page 14.21 for designators.
- 7 Glass pattern:  
3 = Clear  
9 = Frosted (+\$66)
- 8 Trim finish designator:  
Paint number or  
501 = Platinum Metallic (+10%)
- 9 Hinge color designator
- 10 Side 1 fabric grade
- 11 Side 1 fabric number
- 12 Side 2 fabric grade
- 13 Side 2 fabric number

## Sectional Panels

Three Tiles per Side—Glass/Metal/Fabric

Pricing

GSA SIN 711-1  
COM GSA Non-Contract



				Powered		Non-Powered	
<i>D</i>	<i>W</i>	<i>H</i>	<i>Model</i>	<i>Fabric Price</i> <i>A or COM</i>	<i>Grade</i> <i>B</i>	<i>Fabric Price</i> <i>A or COM</i>	<i>Grade</i> <i>B</i>
48"H							
2"	18"	48¼"	11P1848SGMF	—	—	\$915	\$971
	24"		11P2448SGMF	\$1163	\$1219	998	1054
	30"		11P3048SGMF	1230	1286	1067	1123
	36"		11P3648SGMF	1295	1351	1130	1186
	42"		11P4248SGMF	1382	1438	1216	1272
	48"		11P4848SGMF	1438	1494	1275	1331
54"H							
2"	18"	54¼"	11P1854SGMF	—	—	\$953	\$1009
	24"		11P2454SGMF	\$1194	\$1250	1032	1088
	30"		11P3054SGMF	1267	1323	1103	1159
	36"		11P3654SGMF	1345	1401	1179	1235
	42"		11P4254SGMF	1426	1482	1262	1318
	48"		11P4854SGMF	1488	1544	1322	1378

18"W panel is available non-powered only; does not accept power entry or receptacles.

Fabric selected for side will apply to all tiles.

Metal pattern selected will apply to both metal tiles.

Use an electronic specification tool for accurate pricing when specifying two different fabric grades on a panel.

Statement of Line	➤ See page 14.2
Planning	14.4
Pricing	14.29
Surface Materials	14.93

### Standard Includes

- Top cap
- One fabric tile per side
- One glass tile
- One metal tile per side
- Two base wireway covers
- Two panel hinges
- Two panel glides
- Carpet grippers
- Power distribution assembly on powered panels

### How to Specify



- 1 Model
- 2 Power option:  
**P** = Powered  
**N** = Non-powered  
**H** = Hardwired (+\$70 to non-powered)
- 3 Top cap material:  
**P** = Paint
- 4 Type of power system (omit for non-powered and hardwired):  
**84** = 8-wire, 4-circuit
- 5 Top cap profile:  
**C** = Crowned
- 6 Wireway cover punch option (omit for 18"W):  
 ➤ See page 14.21 for designators.
- 7 Glass pattern:  
**3** = Clear  
**9** = Frosted (+\$66)
- 8 Metal pattern:  
**D** = Bordered  
**S** = Smooth
- 9 Trim finish designator:  
 Paint number or  
**501** = Platinum Metallic (+10%)
- 10 Hinge color designator
- 11 Side 1 fabric grade
- 12 Side 1 fabric number
- 13 Side 2 fabric grade
- 14 Side 2 fabric number

## Sectional Panels

Pricing

Three Tiles per Side—Glass/Mid-Wireway/Fabric

GSA SIN 711-1  
COM GSA Non-Contract



				Powered		Non-Powered	
D	W	H	Model	Fabric Price Grade		Fabric Price Grade	
				A or COM	B	A or COM	B
48"H							
2"	24"	48¼"	11P2448SGWF	\$1224	\$1280	—	—
	30"		11P3048SGWF	1279	1335	—	—
	36"		11P3648SGWF	1338	1394	—	—
	42"		11P4248SGWF	1416	1472	—	—
	48"		11P4848SGWF	1464	1520	—	—
54"H							
2"	24"	54¼"	11P2454SGWF	\$1254	\$1310	—	—
	30"		11P3054SGWF	1317	1373	—	—
	36"		11P3654SGWF	1388	1444	—	—
	42"		11P4254SGWF	1461	1517	—	—
	48"		11P4854SGWF	1514	1570	—	—

Fabric selected for side will apply to all tiles.

Mid-wireway cover pattern selected will apply to both mid-wireway covers.

Statement of Line	➤ See page 14.2
Planning	14.4
Pricing	14.29
Surface Materials	14.93

### Standard Includes

- Top cap
- One fabric tile per side
- One glass tile
- Two mid-wireway covers
- Two base wireway covers
- Two panel hinges
- Two panel glides
- Carpet grippers
- Two power distribution assemblies
- Base to mid-wireway jumper

### How to Specify


- 1 Model
- 2 Power option:  
P = Powered
- 3 Top cap material:  
P = Paint
- 4 Type of power system:  
84 = 8-wire, 4-circuit
- 5 Top cap profile:  
C = Crowned
- 6 Wireway cover punch option:  
➤ See page 14.21 for designators.
- 7 Mid-wireway cover punch option:  
➤ See page 14.21 for designators.
- 8 Mid-wireway cover pattern:  
D = Bordered  
S = Smooth
- 9 Glass pattern:  
3 = Clear  
9 = Frosted (+\$66)
- 10 Trim finish designator:  
Paint number or  
501 = Platinum Metallic (+10%)
- 11 Hinge color designator
- 12 Side 1 fabric grade
- 13 Side 1 fabric number
- 14 Side 2 fabric grade
- 15 Side 2 fabric number

## Sectional Panels

Pricing

Four Tiles per Side—Fabric/Fabric/Fabric/Fabric

GSA SIN 711-1  
COM GSA Non-Contract



				Powered		Non-Powered	
D	W	H	Model	Fabric Price	Grade	Fabric Price	Grade
				A or COM	B	A or COM	B
62"H							
2"	18"	62¼"	11P1862SFFFF	—	—	\$1084	\$1308
	24"		11P2462SFFFF	\$1332	\$1556	1171	1395
	30"		11P3062SFFFF	1427	1651	1265	1489
	36"		11P3662SFFFF	1500	1724	1335	1559
	42"		11P4262SFFFF	1584	1808	1422	1646
	48"		11P4862SFFFF	1655	1879	1491	1715
66"H							
2"	18"	66¼"	11P1866SFFFF	—	—	\$1100	\$1324
	24"		11P2466SFFFF	\$1350	\$1574	1187	1411
	30"		11P3066SFFFF	1448	1672	1284	1508
	36"		11P3666SFFFF	1528	1752	1362	1586
	42"		11P4266SFFFF	1608	1832	1442	1666
	48"		11P4866SFFFF	1676	1900	1513	1737

18"W panel is available non-powered only; does not accept power entry or receptacles.

Fabric selected for side will apply to all tiles.

Use an electronic specification tool for accurate pricing when specifying two different fabric grades on a panel.

Statement of Line	➤ See page 14.2
Planning	14.4
Pricing	14.29
Surface Materials	14.93

### Standard Includes

- Top cap
- Four fabric tiles per side
- Two base wireway covers
- Two panel hinges
- Two panel glides
- Carpet grippers
- Power distribution assembly on powered panels

### How to Specify


- 1 Model
- 2 Power option:  
P = Powered  
N = Non-powered  
H = Hardwired (+\$70 to non-powered)
- 3 Top cap material:  
P = Paint
- 4 Type of power system (omit for non-powered and hardwired):  
84 = 8-wire, 4-circuit
- 5 Top cap profile:  
C = Crowned
- 6 Wireway cover punch option (omit for 18"W):  
➤ See page 14.21 for designators.
- 7 Trim finish designator:  
Paint number or  
501 = Platinum Metallic (+10%)
- 8 Hinge color designator
- 9 Side 1 fabric grade
- 10 Side 1 fabric number
- 11 Side 2 fabric grade
- 12 Side 2 fabric number

## Sectional Panels

## Pricing

Four Tiles per Side—Fabric/Fabric/Metal/Fabric

GSA SIN 711-1  
COM GSA Non-Contract



				Powered		Non-Powered	
				Fabric	Price Grade	Fabric	Price Grade
D	W	H	Model	A or COM	B	A or COM	B
62"H							
2"	18"	62¼"	11P1862SFFMF	—	—	\$1084	\$1252
	24"		11P2462SFFMF	\$1332	\$1500	1171	1339
	30"		11P3062SFFMF	1427	1595	1265	1433
	36"		11P3662SFFMF	1500	1668	1335	1503
	42"		11P4262SFFMF	1584	1752	1422	1590
	48"		11P4862SFFMF	1655	1823	1491	1659
66"H							
2"	18"	66¼"	11P1866SFFMF	—	—	\$1100	\$1268
	24"		11P2466SFFMF	\$1350	\$1518	1187	1355
	30"		11P3066SFFMF	1448	1616	1284	1452
	36"		11P3666SFFMF	1528	1696	1362	1530
	42"		11P4266SFFMF	1608	1776	1442	1610
	48"		11P4866SFFMF	1676	1844	1513	1681

18"W panel is available non-powered only; does not accept power entry or receptacles.

Fabric selected for side will apply to all tiles.

Metal pattern selected will apply to both metal tiles.

Statement of Line	➤ See page 14.2
Planning	14.4
Pricing	14.29
Surface Materials	14.93

### Standard Includes

- Top cap
- Three fabric tiles per side
- One metal tile per side
- Two base wireway covers
- Two panel hinges
- Two panel glides
- Carpet grippers
- Power distribution assembly on powered panels

### How to Specify

- 1 Model
- 2 Power option:  
P = Powered  
N = Non-powered  
H = Hardwired (+\$70 to non-powered)
- 3 Top cap material:  
P = Paint
- 4 Type of power system (omit for non-powered and hardwired):  
84 = 8-wire, 4-circuit
- 5 Top cap profile:  
C = Crowned
- 6 Wireway cover punch option (omit for 18"W):  
➤ See page 14.21 for designators.
- 7 Metal pattern:  
D = Bordered  
S = Smooth
- 8 Trim finish designator:  
Paint number or  
501 = Platinum Metallic (+10%)
- 9 Hinge color designator
- 10 Side 1 fabric grade
- 11 Side 1 fabric number
- 12 Side 2 fabric grade
- 13 Side 2 fabric number




## Sectional Panels

## Pricing

Four Tiles per Side—Fabric/Fabric/Mid-Wireway/Fabric

GSA SIN 711-1  
COM GSA Non-Contract



				Powered		Non-Powered	
D	W	H	Model	Fabric Price Grade		Fabric Price Grade	
				A or COM	B	A or COM	B
62"H							
2"	24"	62¼"	11P2462SFFWF	\$1390	\$1558	—	—
	30"		11P3062SFFWF	1479	1647	—	—
	36"		11P3662SFFWF	1544	1712	—	—
	42"		11P4262SFFWF	1620	1788	—	—
	48"		11P4862SFFWF	1682	1850	—	—
66"H							
2"	24"	66¼"	11P2466SFFWF	\$1410	\$1578	—	—
	30"		11P3066SFFWF	1499	1667	—	—
	36"		11P3666SFFWF	1571	1739	—	—
	42"		11P4266SFFWF	1643	1811	—	—
	48"		11P4866SFFWF	1700	1868	—	—

Fabric selected for side will apply to all tiles.

Mid-wireway cover pattern selected will apply to both mid-wireway covers.

Use an electronic specification tool for accurate pricing when specifying two different fabric grades on a panel.

Statement of Line	➤ See page 14.2
Planning	14.4
Pricing	14.29
Surface Materials	14.93

### Standard Includes

- Top cap
- Three fabric tiles per side
- Two mid-wireway covers
- Two base wireway covers
- Two panel hinges
- Two panel glides
- Carpet grippers
- Two power distribution assemblies
- Base to mid-wireway jumper

### How to Specify



- 1 Model
- 2 Power option:  
**P** = Powered
- 3 Top cap material:  
**P** = Paint
- 4 Type of power system:  
**84** = 8-wire, 4-circuit
- 5 Top cap profile:  
**C** = Crowned
- 6 Base wireway cover punch option:  
➤ See page 14.21 for designators.
- 7 Mid-wireway cover punch option:  
➤ See page 14.21 for designators.
- 8 Mid-wireway cover pattern:  
**D** = Bordered  
**S** = Smooth
- 9 Trim finish designator:  
Paint number or  
**501** = Platinum Metallic (+10%)
- 10 Hinge color designator
- 11 Side 1 fabric grade
- 12 Side 1 fabric number
- 13 Side 2 fabric grade
- 14 Side 2 fabric number

## Sectional Panels

## Pricing

Four Tiles per Side—Glass/Fabric/Fabric/Fabric

GSA SIN 711-1  
COM GSA Non-Contract



				Powered		Non-Powered	
D	W	H	Model	Fabric Price	Grade	Fabric Price	Grade
				A or COM	B	A or COM	B
62"H							
2"	18"	62¼"	11P1862SGFFF	—	—	\$1137	\$1305
	24"		11P2462SGFFF	\$1387	\$1555	1227	1395
	30"		11P3062SGFFF	1481	1649	1318	1486
	36"		11P3662SGFFF	1556	1724	1392	1560
	42"		11P4262SGFFF	1649	1817	1483	1651
	48"		11P4862SGFFF	1720	1888	1556	1724
66"H							
2"	18"	66¼"	11P1866SGFFF	—	—	\$1155	\$1323
	24"		11P2466SGFFF	\$1403	\$1571	1240	1408
	30"		11P3066SGFFF	1504	1672	1340	1508
	36"		11P3666SGFFF	1591	1759	1425	1593
	42"		11P4266SGFFF	1674	1842	1508	1676
	48"		11P4866SGFFF	1744	1912	1582	1750

18"W panel is available non-powered only; does not accept power entry or receptacles.

Fabric selected for side will apply to all tiles.

Use an electronic specification tool for accurate pricing when specifying two different fabric grades on a panel.

Statement of Line	➤ See page 14.2
Planning	14.4
Pricing	14.29
Surface Materials	14.93

### Standard Includes

- Top cap
- Three fabric tiles per side
- One glass tile
- Two base wireway covers
- Two panel hinges
- Two panel glides
- Carpet grippers
- Power distribution assembly on powered panels

### How to Specify



- 1 Model
- 2 Power option:  
P = Powered  
N = Non-powered  
H = Hardwired (+\$70 to non-powered)
- 3 Top cap material:  
P = Paint
- 4 Type of power system (omit for non-powered and hardwired):  
84 = 8-wire, 4-circuit
- 5 Top cap profile:  
C = Crowned
- 6 Wireway cover punch option (omit for 18"W):  
➤ See page 14.21 for designators.
- 7 Glass pattern:  
3 = Clear  
9 = Frosted (+\$66)
- 8 Trim finish designator:  
Paint number or  
501 = Platinum Metallic (+10%)
- 9 Hinge color designator
- 10 Side 1 fabric grade
- 11 Side 1 fabric number
- 12 Side 2 fabric grade
- 13 Side 2 fabric number

## Sectional Panels

## Pricing

Four Tiles per Side—Glass/Fabric/Metal/Fabric

GSA SIN 711-1  
COM GSA Non-Contract



18"W panel is available non-powered only; does not accept power entry or receptacles.

Fabric selected for side will apply to all tiles.

Metal pattern selected will apply to both metal tiles.

Use an electronic specification tool for accurate pricing when specifying two different fabric grades on a panel.

				Powered		Non-Powered	
<i>D</i>	<i>W</i>	<i>H</i>	<i>Model</i>	<i>Fabric Price</i> <i>A or COM</i>	<i>Grade</i> <i>B</i>	<i>Fabric Price</i> <i>A or COM</i>	<i>Grade</i> <i>B</i>
62"H							
2"	18"	62¼"	11P1862SGFMF	—	—	\$1137	\$1249
	24"		11P2462SGFMF	\$1387	\$1499	1227	1339
	30"		11P3062SGFMF	1481	1593	1318	1430
	36"		11P3662SGFMF	1556	1668	1392	1504
	42"		11P4262SGFMF	1649	1761	1483	1595
	48"		11P4862SGFMF	1720	1832	1556	1668
66"H							
2"	18"	66¼"	11P1866SGFMF	—	—	\$1155	\$1267
	24"		11P2466SGFMF	\$1403	\$1515	1240	1352
	30"		11P3066SGFMF	1504	1616	1340	1452
	36"		11P3666SGFMF	1591	1703	1425	1537
	42"		11P4266SGFMF	1674	1786	1508	1620
	48"		11P4866SGFMF	1744	1856	1582	1694

Statement of Line	➤ See page 14.2
Planning	14.4
Pricing	14.29
Surface Materials	14.93

### Standard Includes

- Top cap
- Two fabric tiles per side
- One glass tile
- One metal tile per side
- Two base wireway covers
- Two panel hinges
- Two panel glides
- Carpet grippers
- Power distribution assembly on powered panels

### How to Specify


- 1 Model
- 2 Power option:  
**P** = Powered  
**N** = Non-powered  
**H** = Hardwired (+\$70 to non-powered)
- 3 Top cap material:  
**P** = Paint
- 4 Type of power system (omit for non-powered and hardwired):  
**84** = 8-wire, 4-circuit
- 5 Top cap profile:  
**C** = Crowned
- 6 Wireway cover punch option (omit for 18"W):  
 ➤ See page 14.21 for designators.
- 7 Glass pattern:  
**3** = Clear  
**9** = Frosted (+\$66)
- 8 Metal pattern:  
**D** = Bordered  
**S** = Smooth
- 9 Trim finish designator:  
 Paint number or  
**501** = Platinum Metallic (+10%)
- 10 Hinge color designator
- 11 Side 1 fabric grade
- 12 Side 1 fabric number
- 13 Side 2 fabric grade
- 14 Side 2 fabric number

## Sectional Panels

## Pricing

Four Tiles per Side—Glass/Fabric/Mid-Wireway/Fabric

GSA SIN 711-1  
COM GSA Non-Contract



				Powered		Non-Powered	
D	W	H	Model	Fabric Price Grade		Fabric Price Grade	
				A or COM	B	A or COM	B
62"H							
2"	24"	62¼"	11P2462SGFWF	\$1447	\$1559	—	—
	30"		11P3062SGFWF	1534	1646	—	—
	36"		11P3662SGFWF	1602	1714	—	—
	42"		11P4262SGFWF	1640	1752	—	—
	48"		11P4862SGFWF	1744	1856	—	—
66"H							
2"	24"	66¼"	11P2466SGFWF	\$1464	\$1576	—	—
	30"		11P3066SGFWF	1554	1666	—	—
	36"		11P3666SGFWF	1633	1745	—	—
	42"		11P4266SGFWF	1709	1821	—	—
	48"		11P4866SGFWF	1771	1883	—	—

Fabric selected for side will apply to all tiles.

Mid-wireway cover pattern selected will apply to both mid-wireway covers.

Use an electronic specification tool for accurate pricing when specifying two different fabric grades on a panel.

Statement of Line	➤ See page 14.2
Planning	14.4
Pricing	14.29
Surface Materials	14.93

### Standard Includes

- Top cap
- Two fabric tiles per side
- One glass tile
- Two mid-wireway covers
- Two base wireway covers
- Two panel hinges
- Two panel glides
- Carpet grippers
- Two power distribution assemblies
- Base to mid-wireway jumper

### How to Specify


- 1 Model
- 2 Power option:  
**P** = Powered
- 3 Top cap material:  
**P** = Paint
- 4 Type of power system:  
**84** = 8-wire, 4-circuit
- 5 Top cap profile:  
**C** = Crowned
- 6 Wireway cover punch option:  
➤ See page 14.21 for designators.
- 7 Mid-wireway cover punch option:  
➤ See page 14.21 for designators.
- 8 Mid-wireway cover pattern:  
**D** = Bordered  
**S** = Smooth
- 9 Glass pattern:  
**3** = Clear  
**9** = Frosted (+\$66)
- 10 Trim finish designator:  
Paint number or  
**501** = Platinum Metallic (+10%)
- 11 Hinge color designator
- 12 Side 1 fabric grade
- 13 Side 1 fabric number
- 14 Side 2 fabric grade
- 15 Side 2 fabric number

## Sectional Panels

Pricing

Four Tiles per Side—Glass/Glass/Fabric/Fabric

GSA SIN 711-1  
COM GSA Non-Contract



				Powered		Non-Powered	
D	W	H	Model	Fabric Price Grade		Fabric Price Grade	
				A or COM	B	A or COM	B
62"H							
2"	18"	62¼"	11P1862SGGFF	—	—	\$1190	\$1302
	24"		11P2462SGGFF	\$1441	\$1553	1279	1391
	30"		11P3062SGGFF	1538	1650	1374	1486
	36"		11P3662SGGFF	1614	1726	1449	1561
	42"		11P4262SGGFF	1711	1823	1548	1660
	48"		11P4862SGGFF	1787	1899	1621	1733
66"H							
2"	18"	66¼"	11P1866SGGFF	—	—	\$1207	\$1319
	24"		11P2466SGGFF	\$1460	\$1572	1296	1408
	30"		11P3066SGGFF	1558	1670	1394	1506
	36"		11P3666SGGFF	1648	1760	1480	1592
	42"		11P4266SGGFF	1736	1848	1571	1683
	48"		11P4866SGGFF	1812	1924	1649	1761

18"W panel is available non-powered only; does not accept power entry or receptacles.

Fabric selected for side will apply to all tiles.

Use an electronic specification tool for accurate pricing when specifying two different fabric grades on a panel.

Statement of Line	➤ See page 14.2
Planning	14.4
Pricing	14.29
Surface Materials	14.93

### Standard Includes

- Top cap
- Two fabric tiles per side
- Two glass tiles
- Two base wireway covers
- Two panel hinges
- Two panel glides
- Carpet grippers
- Power distribution assembly on powered panels

### How to Specify



- 1 Model
- 2 Power option:  
P = Powered  
N = Non-powered  
H = Hardwired (+\$70 to non-powered)
- 3 Top cap material:  
P = Paint
- 4 Type of power system (omit for non-powered and hardwired):  
84 = 8-wire, 4-circuit
- 5 Top cap profile:  
C = Crowned
- 6 Wireway cover punch option (omit for 18"W):  
➤ See page 14.21 for designators.
- 7 Glass pattern:  
3 = Clear  
9 = Frosted (+\$66)
- 8 Trim finish designator:  
Paint number or  
501 = Platinum Metallic (+10%)
- 9 Hinge color designator
- 10 Side 1 fabric grade
- 11 Side 1 fabric number
- 12 Side 2 fabric grade
- 13 Side 2 fabric number

## Sectional Panels

## Pricing

Four Tiles per Side—Glass/Glass/Metal/Fabric

GSA SIN 711-1  
COM GSA Non-Contract



18"W panel is available non-powered only; does not accept power entry or receptacles.

Fabric selected for side will apply to all tiles.

Metal pattern selected will apply to both metal tiles.

Use an electronic specification tool for accurate pricing when specifying two different fabric grades on a panel.

				Powered		Non-Powered	
<i>D</i>	<i>W</i>	<i>H</i>	<i>Model</i>	<i>Fabric Price Grade A or COM</i>	<i>Grade B</i>	<i>Fabric Price Grade A or COM</i>	<i>Grade B</i>
62"H							
2"	18"	62¼"	11P1862SGGMF	—	—	\$1190	\$1246
	24"		11P2462SGGMF	\$1441	\$1497	1279	1335
	30"		11P3062SGGMF	1538	1594	1374	1430
	36"		11P3662SGGMF	1614	1670	1449	1505
	42"		11P4262SGGMF	1711	1767	1548	1604
	48"		11P4862SGGMF	1787	1843	1621	1677
66"H							
2"	18"	66¼"	11P1866SGGMF	—	—	\$1207	\$1263
	24"		11P2466SGGMF	\$1460	\$1516	1296	1352
	30"		11P3066SGGMF	1558	1614	1394	1450
	36"		11P3666SGGMF	1648	1704	1480	1536
	42"		11P4266SGGMF	1736	1792	1571	1627
	48"		11P4866SGGMF	1812	1868	1649	1705

Statement of Line	➤ See page 14.2
Planning	14.4
Pricing	14.29
Surface Materials	14.93

### Standard Includes

- Top cap
- One fabric tile per side
- Two glass tiles
- One metal tile per side
- Two base wireway covers
- Two panel hinges
- Two panel glides
- Carpet grippers
- Power distribution assembly on powered panels

### How to Specify



- 1 Model
- 2 Power option:  
P = Powered  
N = Non-powered  
H = Hardwired (+\$70 to non-powered)
- 3 Top cap material:  
P = Paint
- 4 Type of power system (omit for non-powered and hardwired):  
84 = 8-wire, 4-circuit
- 5 Top cap profile:  
C = Crowned
- 6 Wireway cover punch option (omit for 18"W):  
➤ See page 14.21 for designators.
- 7 Glass pattern:  
3 = Clear  
9 = Frosted (+\$66)
- 8 Metal pattern:  
D = Bordered  
S = Smooth
- 9 Trim finish designator:  
Paint number or  
501 = Platinum Metallic (+10%)
- 10 Hinge color designator
- 11 Side 1 fabric grade
- 12 Side 1 fabric number
- 13 Side 2 fabric grade
- 14 Side 2 fabric number

## Sectional Panels

## Pricing

Four Tiles per Side—Glass/Glass/Mid-Wireway/Fabric

GSA SIN 711-1  
COM GSA Non-Contract



				Powered		Non-Powered	
D	W	H	Model	Fabric Price Grade		Fabric Price Grade	
				A or COM	B	A or COM	B
62"H							
2"	24"	62¼"	11P2462SGGWF	\$1501	\$1557	—	—
	30"		11P3062SGGWF	1591	1647	—	—
	36"		11P3662SGGWF	1657	1713	—	—
	42"		11P4262SGGWF	1744	1800	—	—
	48"		11P4862SGGWF	1812	1868	—	—
66"H							
2"	24"	66¼"	11P2466SGGWF	\$1518	\$1574	—	—
	30"		11P3066SGGWF	1610	1666	—	—
	36"		11P3666SGGWF	1691	1747	—	—
	42"		11P4266SGGWF	1771	1827	—	—
	48"		11P4866SGGWF	1838	1894	—	—

Fabric selected for side will apply to all tiles.

Mid-wireway cover pattern selected will apply to both mid-wireway covers.

Use an electronic specification tool for accurate pricing when specifying two different fabric grades on a panel.

Statement of Line	➤ See page 14.2
Planning	14.4
Pricing	14.29
Surface Materials	14.93

### Standard Includes

- Top cap
- One fabric tile per side
- Two glass tiles
- Two mid-wireway covers
- Two base wireway covers
- Two panel hinges
- Two panel glides
- Carpet grippers
- Two power distribution assemblies
- Base to mid-wireway jumper

### How to Specify


- 1 Model
- 2 Power option:  
**P** = Powered
- 3 Top cap material:  
**P** = Paint
- 4 Type of power system:  
**84** = 8-wire, 4-circuit
- 5 Top cap profile:  
**C** = Crowned
- 6 Wireway cover punch option:  
➤ See page 14.21 for designators.
- 7 Mid-wireway cover punch option:  
➤ See page 14.21 for designators.
- 8 Mid-wireway cover pattern:  
**D** = Bordered  
**S** = Smooth
- 9 Glass pattern:  
**3** = Clear  
**9** = Frosted (+\$66)
- 10 Trim finish designator:  
Paint number or  
**501** = Platinum Metallic (+10%)
- 11 Hinge color designator
- 12 Side 1 fabric grade
- 13 Side 1 fabric number
- 14 Side 2 fabric grade
- 15 Side 2 fabric number

## Sectional Panels

## Pricing

Five Tiles per Side—Fabric/Fabric/Fabric/Fabric/Fabric

GSA SIN 711-1  
COM GSA Non-Contract



				Powered		Non-Powered	
<i>D</i>	<i>W</i>	<i>H</i>	<i>Model</i>	<i>Fabric A or COM</i>	<i>Price Grade B</i>	<i>Fabric A or COM</i>	<i>Price Grade B</i>
80"H							
2"	18"	80 1/4"	11P1880SFFFFF	—	—	\$1430	\$1710
	24"		11P2480SFFFFF	\$1688	\$1968	1524	1804
	30"		11P3080SFFFFF	1775	2055	1611	1891
	36"		11P3680SFFFFF	1860	2140	1694	1974
	42"		11P4280SFFFFF	1976	2256	1812	2092
	48"		11P4880SFFFFF	2056	2336	1892	2172

18"W panel is available non-powered only; does not accept power entry or receptacles.

Fabric selected for side will apply to all tiles.

Use an electronic specification tool for accurate pricing when specifying two different fabric grades on a panel.

Statement of Line	➤ See page 14.2
Planning	14.4
Pricing	14.29
Surface Materials	14.93

### Standard Includes

- Top cap
- Five fabric tiles per side
- Two base wireway covers
- Two panel hinges
- Two panel glides
- Carpet grippers
- Power distribution assembly on powered panels

### How to Specify

- 1 Model
- 2 Power option:  
P = Powered  
N = Non-powered  
H = Hardwired (+\$70 to non-powered)
- 3 Top cap material:  
P = Paint
- 4 Type of power system (omit for non-powered and hardwired):  
84 = 8-wire, 4-circuit
- 5 Top cap profile:  
C = Crowned
- 6 Wireway cover punch option (omit for 18"W):  
➤ See page 14.21 for designators.
- 7 Trim finish designator:  
Paint number or  
501 = Platinum Metallic (+10%)
- 8 Hinge color designator
- 9 Side 1 fabric grade
- 10 Side 1 fabric number
- 11 Side 2 fabric grade
- 12 Side 2 fabric number




## Sectional Panels

## Pricing

Five Tiles per Side—Fabric/Fabric/Fabric/Metal/Fabric

GSA SIN 711-1  
COM GSA Non-Contract



				Powered		Non-Powered	
<i>D</i>	<i>W</i>	<i>H</i>	<i>Model</i>	<i>Fabric Price</i> <i>A or COM</i>	<i>Grade</i> <i>B</i>	<i>Fabric Price</i> <i>A or COM</i>	<i>Grade</i> <i>B</i>
80"H							
2"	18"	80 1/4"	11P1880SFFFMF	—	—	\$1430	\$1654
	24"		11P2480SFFFMF	\$1688	\$1912	1524	1748
	30"		11P3080SFFFMF	1775	1999	1611	1835
	36"		11P3680SFFFMF	1860	2084	1694	1918
	42"		11P4280SFFFMF	1976	2200	1812	2036
	48"		11P4880SFFFMF	2056	2280	1892	2116

18"W panel is available non-powered only; does not accept power entry or receptacles.

Fabric selected for side will apply to all tiles.

Metal pattern selected will apply to both metal tiles.

Use an electronic specification tool for accurate pricing when specifying two different fabric grades on a panel.

Statement of Line	➤ See page 14.2
Planning	14.4
Pricing	14.29
Surface Materials	14.93

### Standard Includes

- Top cap
- Four fabric tiles per side
- One metal tile per side
- Two base wireway covers
- Two panel hinges
- Two panel glides
- Carpet grippers
- Power distribution assembly on powered panels

### How to Specify


- 1 Model
- 2 Power option:  
P = Powered  
N = Non-powered  
H = Hardwired (+\$70 to non-powered)
- 3 Top cap material:  
P = Paint
- 4 Type of power system (omit for non-powered and hardwired):  
84 = 8-wire, 4-circuit
- 5 Top cap profile: C = Crowned
- 6 Wireway cover punch option (omit for 18"W):  
➤ See page 14.21 for designators.
- 7 Metal pattern:  
D = Bordered S = Smooth
- 8 Trim finish designator:  
Paint number or  
501 = Platinum Metallic (+10%)
- 9 Hinge color designator
- 10 Side 1 fabric grade
- 11 Side 1 fabric number
- 12 Side 2 fabric grade
- 13 Side 2 fabric number

Sectional Panels

Pricing

Five Tiles per Side—Fabric/Fabric/Fabric/Mid-Wireway/Fabric

GSA SIN 711-1  
COM GSA Non-Contract



				Powered		Non-Powered	
D	W	H	Model	Fabric Price	Grade	Fabric Price	Grade
				A or COM	B	A or COM	B
80"H							
2"	24"	80¼"	11P2480SFFFWF	\$1748	\$1972	—	—
	30"		11P3080SFFFWF	1826	2050	—	—
	36"		11P3680SFFFWF	1902	2126	—	—
	42"		11P4280SFFFWF	2014	2238	—	—
	48"		11P4880SFFFWF	2083	2307	—	—

Fabric selected for side will apply to all tiles.

Mid-wireway cover pattern selected will apply to both mid-wireway covers.

Use an electronic specification tool for accurate pricing when specifying two different fabric grades on a panel.

Statement of Line	➤ See page 14.2
Planning	14.4
Pricing	14.29
Surface Materials	14.93

Standard Includes

- Top cap
- Four fabric tiles per side
- Two mid-wireway covers
- Two base wireway covers
- Two panel hinges
- Two panel glides
- Carpet grippers
- Two power distribution assemblies
- Base to mid-wireway jumper

How to Specify


- 1 Model
- 2 Power option:  
P = Powered
- 3 Top cap material:  
P = Paint
- 4 Type of power system:  
84 = 8-wire, 4-circuit
- 5 Top cap profile:  
C = Crowned
- 6 Base wireway cover punch option:  
➤ See page 14.21 for designators.
- 7 Mid-wireway cover punch option:  
➤ See page 14.21 for designators.
- 8 Mid-wireway cover pattern:  
D = Bordered  
S = Smooth
- 9 Trim finish designator:  
Paint number or  
501 = Platinum Metallic (+10%)
- 10 Hinge color designator
- 11 Side 1 fabric grade
- 12 Side 1 fabric number
- 13 Side 2 fabric grade
- 14 Side 2 fabric number

## Sectional Panels

## Pricing

Five Tiles per Side—Glass/Fabric/Fabric/Fabric/Fabric

GSA SIN 711-1  
COM GSA Non-Contract



D	W	H	Model	Powered		Non-Powered	
				Fabric	Price Grade	Fabric	Price Grade
				A or COM	B	A or COM	B
<b>80"H</b>							
2"	18"	80 1/4"	<b>11P1880SGFFFF</b>	—	—	\$1481	\$1705
	24"		<b>11P2480SGFFFF</b>	\$1742	\$1966	1580	1804
	30"		<b>11P3080SGFFFF</b>	1832	2056	1665	1889
	36"		<b>11P3680SGFFFF</b>	1915	2139	1753	1977
	42"		<b>11P4280SGFFFF</b>	2038	2262	1874	2098
	48"		<b>11P4880SGFFFF</b>	2123	2347	1957	2181

18"W panel is available non-powered only; does not accept power entry or receptacles.

Fabric selected for side will apply to all tiles.

Use an electronic specification tool for accurate pricing when specifying two different fabric grades on a panel.

Statement of Line	➤ See page 14.2
Planning	14.4
Pricing	14.29
Surface Materials	14.93

### Standard Includes

- Top cap
- Four fabric tiles per side
- One glass tile
- Two base wireway covers
- Two panel hinges
- Two panel glides
- Carpet grippers
- Power distribution assembly on powered panels

### How to Specify


- 1 Model
- 2 Power option:  
P = Powered  
N = Non-powered  
H = Hardwired (+\$70 to non-powered)
- 3 Top cap material:  
P = Paint
- 4 Type of power system (omit for non-powered and hardwired):  
84 = 8-wire, 4-circuit
- 5 Top cap profile:  
C = Crowned
- 6 Wireway cover punch option (omit for 18"W):  
➤ See page 14.21 for designators.
- 7 Glass pattern:  
3 = Clear  
9 = Frosted (+\$66)
- 8 Trim finish designator:  
Paint number or  
501 = Platinum Metallic (+10%)
- 9 Hinge color designator
- 10 Side 1 fabric grade
- 11 Side 1 fabric number
- 12 Side 2 fabric grade
- 13 Side 2 fabric number

## Sectional Panels

## Pricing

Five Tiles per Side—Glass/Fabric/Fabric/Metal/Fabric

GSA SIN 711-1  
COM GSA Non-Contract



				Powered		Non-Powered	
D	W	H	Model	Fabric	Price	Grade	
				A or COM		B	
80"H							
2"	18"	80 1/4"	11P1880SGFFMF		—	—	\$1481
	24"		11P2480SGFFMF		\$1742	\$1910	1580
	30"		11P3080SGFFMF		1832	2000	1665
	36"		11P3680SGFFMF		1915	2083	1753
	42"		11P4280SGFFMF		2038	2206	1874
	48"		11P4880SGFFMF		2123	2291	1957

18"W panel is available non-powered only; does not accept power entry or receptacles.

Fabric selected for side will apply to all tiles.

Metal pattern selected will apply to both metal tiles.

Use an electronic specification tool for accurate pricing when specifying two different fabric grades on a panel.

Statement of Line	➤ See page 14.2
Planning	14.4
Pricing	14.29
Surface Materials	14.93

### Standard Includes

- Top cap
- Three fabric tiles per side
- One glass tile
- One metal tile per side
- Two base wireway covers
- Two panel hinges
- Two panel glides
- Carpet grippers
- Power distribution assembly on powered panels

### How to Specify


- 1 Model
- 2 Power option:  
P = Powered  
N = Non-powered  
H = Hardwired (+\$70 to non-powered)
- 3 Top cap material:  
P = Paint
- 4 Type of power system (omit for non-powered and hardwired):  
84 = 8-wire, 4-circuit
- 5 Top cap profile:  
C = Crowned
- 6 Wireway cover punch option (omit for 18"W):  
➤ See page 14.21 for designators.
- 7 Glass pattern:  
3 = Clear  
9 = Frosted (+\$66)
- 8 Metal pattern:  
D = Bordered  
S = Smooth
- 9 Trim finish designator:  
Paint number or  
501 = Platinum Metallic (+10%)
- 10 Hinge color designator
- 11 Side 1 fabric grade
- 12 Side 1 fabric number
- 13 Side 2 fabric grade
- 14 Side 2 fabric number

Sectional Panels

Pricing

Five Tiles per Side—Glass/Fabric/Fabric/Mid-Wireway/Fabric

GSA SIN 711-1  
COM GSA Non-Contract



				Powered		Non-Powered	
D	W	H	Model	Fabric Price	Grade	Fabric Price	Grade
				A or COM	B	A or COM	B
80"H							
2"	24"	80¼"	11P2480SGFFWF	\$1802	\$1970	—	—
	30"		11P3080SGFFWF	1880	2048	—	—
	36"		11P3680SGFFWF	1957	2125	—	—
	42"		11P4280SGFFWF	2075	2243	—	—
	48"		11P4880SGFFWF	2148	2316	—	—

Fabric selected for side will apply to all tiles.

Mid-wireway cover pattern selected will apply to both mid-wireway covers.

Use an electronic specification tool for accurate pricing when specifying two different fabric grades on a panel.

Statement of Line	➤ See page 14.2
Planning	14.4
Pricing	14.29
Surface Materials	14.93

Standard Includes

- Top cap
- Three fabric tiles per side
- One glass tile
- Two mid-wireway covers
- Two base wireway covers
- Two panel hinges
- Two panel glides
- Carpet grippers
- Two power distribution assemblies
- Base to mid-wireway jumper

How to Specify

- 1 Model
- 2 Power option:  
P = Powered
- 3 Top cap material:  
P = Paint
- 4 Type of power system:  
84 = 8-wire, 4-circuit
- 5 Top cap profile:  
C = Crowned
- 6 Wireway cover punch option:  
➤ See page 14.21 for designators.
- 7 Mid-wireway cover punch option:  
➤ See page 14.21 for designators.
- 8 Mid-wireway cover pattern:  
D = Bordered  
S = Smooth
- 9 Glass pattern:  
3 = Clear  
9 = Frosted (+\$66)
- 10 Trim finish designator:  
Paint number or  
501 = Platinum Metallic (+10%)
- 11 Hinge color designator
- 12 Side 1 fabric grade
- 13 Side 1 fabric number
- 14 Side 2 fabric grade
- 15 Side 2 fabric number

## Sectional Panels

## Pricing

Five Tiles per Side—Glass/Glass/Fabric/Fabric/Fabric

GSA SIN 711-1  
COM GSA Non-Contract



				Powered		Non-Powered	
<i>D</i>	<i>W</i>	<i>H</i>	<i>Model</i>	<i>Fabric Price</i> <i>A or COM</i>	<i>Grade</i> <i>B</i>	<i>Fabric Price</i> <i>A or COM</i>	<i>Grade</i> <i>B</i>
80"H							
2"	18"	80¼"	11P1880SGGFFF	—	—	\$1538	\$1706
	24"		11P2480SGGFFF	\$1798	\$1966	1633	1801
	30"		11P3080SGGFFF	1886	2054	1723	1891
	36"		11P3680SGGFFF	1977	2145	1813	1981
	42"		11P4280SGGFFF	2103	2271	1941	2109
	48"		11P4880SGGFFF	2191	2359	2028	2196

18"W panel is available non-powered only; does not accept power entry or receptacles.

Fabric selected for side will apply to all tiles.

Use an electronic specification tool for accurate pricing when specifying two different fabric grades on a panel.

Statement of Line	➤ See page 14.2
Planning	14.4
Pricing	14.29
Surface Materials	14.93

### Standard Includes

- Top cap
- Three fabric tiles per side
- Two glass tiles
- Two base wireway covers
- Two panel hinges
- Two panel glides
- Carpet grippers
- Power distribution assembly on powered panels

### How to Specify


- 1 Model
- 2 Power option:  
P = Powered  
N = Non-powered  
H = Hardwired (+\$70 to non-powered)
- 3 Top cap material:  
P = Paint
- 4 Type of power system (omit for non-powered and hardwired):  
84 = 8-wire, 4-circuit
- 5 Top cap profile:  
C = Crowned
- 6 Wireway cover punch option (omit for 18"W):  
➤ See page 14.21 for designators.
- 7 Glass pattern:  
3 = Clear  
9 = Frosted (+\$66)
- 8 Trim finish designator:  
Paint number or  
501 = Platinum Metallic (+10%)
- 9 Hinge color designator
- 10 Side 1 fabric grade
- 11 Side 1 fabric number
- 12 Side 2 fabric grade
- 13 Side 2 fabric number

## Sectional Panels

## Pricing

Five Tiles per Side—Glass/Glass/Fabric/Metal/Fabric

GSA SIN 711-1  
COM GSA Non-Contract



				Powered		Non-Powered	
D	W	H	Model	Fabric Price	Grade	Fabric Price	Grade
				A or COM	B	A or COM	B
80"H							
2"	18"	80¼"	11P1880SGGFMF	—	—	\$1538	\$1650
	24"		11P2480SGGFMF	\$1798	\$1910	1633	1745
	30"		11P3080SGGFMF	1886	1998	1723	1835
	36"		11P3680SGGFMF	1977	2089	1813	1925
	42"		11P4280SGGFMF	2103	2215	1941	2053
	48"		11P4880SGGFMF	2191	2303	2028	2140

18"W panel is available non-powered only; does not accept power entry or receptacles.

Fabric selected for side will apply to all tiles.

Metal pattern selected will apply to both metal tiles.

Use an electronic specification tool for accurate pricing when specifying two different fabric grades on a panel.

Statement of Line	➤ See page 14.2
Planning	14.4
Pricing	14.29
Surface Materials	14.93

### Standard Includes

- Top cap
- Two fabric tiles per side
- Two glass tiles
- One metal tile per side
- Two base wireway covers
- Two panel hinges
- Two panel glides
- Carpet grippers
- Power distribution assembly on powered panels

### How to Specify


- 1 Model
- 2 Power option:  
P = Powered  
N = Non-powered  
H = Hardwired (+\$70 to non-powered)
- 3 Top cap material:  
P = Paint
- 4 Type of power system (omit for non-powered and hardwired):  
84 = 8-wire, 4-circuit
- 5 Top cap profile:  
C = Crowned
- 6 Wireway cover punch option (omit for 18"W):  
➤ See page 14.21 for designators.
- 7 Glass pattern:  
3 = Clear  
9 = Frosted (+\$66)
- 8 Metal pattern:  
D = Bordered  
S = Smooth
- 9 Trim finish designator:  
Paint number or  
501 = Platinum Metallic (+10%)
- 10 Hinge color designator
- 11 Side 1 fabric grade
- 12 Side 1 fabric number
- 13 Side 2 fabric grade
- 14 Side 2 fabric number

Sectional Panels

Pricing

Five Tiles per Side—Glass/Glass/Fabric/Mid-Wireway/Fabric

GSA SIN 711-1  
COM GSA Non-Contract



				Powered		Non-Powered	
D	W	H	Model	Fabric Price	Grade	Fabric Price	Grade
				A or COM	B	A or COM	B
80"H							
2"	24"	80¼"	11P2480SGGFWF	\$1860	\$1972	—	—
	30"		11P3080SGGFWF	1939	2051	—	—
	36"		11P3680SGGFWF	2021	2133	—	—
	42"		11P4280SGGFWF	2141	2253	—	—
	48"		11P4880SGGFWF	2219	2331	—	—

Fabric selected for side will apply to all tiles.

Mid-wireway cover pattern selected will apply to both mid-wireway covers.  
Use an electronic specification tool for accurate pricing when specifying two different fabric grades on a panel.

Statement of Line	➤ See page 14.2
Planning	14.4
Pricing	14.29
Surface Materials	14.93

Standard Includes

- Top cap
- Two fabric tiles per side
- Two glass tiles
- Two mid-wireway covers
- Two base wireway covers
- Two panel hinges
- Two panel glides
- Carpet grippers
- Two power distribution assemblies
- Base to mid-wireway jumper

How to Specify

- 1 Model
- 2 Power option:  
P = Powered
- 3 Top cap material:  
P = Paint
- 4 Type of power system:  
84 = 8-wire, 4-circuit
- 5 Top cap profile:  
C = Crowned
- 6 Wireway cover punch option:  
➤ See page 14.21 for designators.
- 7 Mid-wireway cover punch option:  
➤ See page 14.21 for designators.
- 8 Mid-wireway cover pattern:  
D = Bordered  
S = Smooth
- 9 Glass pattern:  
3 = Clear  
9 = Frosted (+\$66)
- 10 Trim finish designator:  
Paint number or  
501 = Platinum Metallic (+10%)
- 11 Hinge color designator
- 12 Side 1 fabric grade
- 13 Side 1 fabric number
- 14 Side 2 fabric grade
- 15 Side 2 fabric number



## Sectional Panels

## Pricing

Five Tiles per Side—Glass/Glass/Glass/Fabric/Fabric

GSA SIN 711-1  
COM GSA Non-Contract



				Powered		Non-Powered	
<i>D</i>	<i>W</i>	<i>H</i>	<i>Model</i>	<i>Fabric Price</i> <i>A or COM</i>	<i>Grade</i> <i>B</i>	<i>Fabric Price</i> <i>A or COM</i>	<i>Grade</i> <i>B</i>
80"H							
2"	18"	80¼"	11P1880SGGGFF	—	—	\$1591	\$1703
	24"		11P2480SGGGFF	\$1851	\$1963	1689	1801
	30"		11P3080SGGGFF	1942	2054	1777	1889
	36"		11P3680SGGGFF	2032	2144	1871	1983
	42"		11P4280SGGGFF	2166	2278	2003	2115
	48"		11P4880SGGGFF	2259	2371	2096	2208

18"W panel is available non-powered only; does not accept power entry or receptacles.

Fabric selected for side will apply to all tiles.

Use an electronic specification tool for accurate pricing when specifying two different fabric grades on a panel.

Statement of Line	➤ See page 14.2
Planning	14.4
Pricing	14.29
Surface Materials	14.93

### Standard Includes

- Top cap
- Two fabric tiles per side
- Three glass tiles
- Two base wireway covers
- Two panel hinges
- Two panel glides
- Carpet grippers
- Power distribution assembly on powered panels

### How to Specify


- 1 Model
- 2 Power option:  
P = Powered  
N = Non-powered  
H = Hardwired (+\$70 to non-powered)
- 3 Top cap material:  
P = Paint
- 4 Type of power system (omit for non-powered and hardwired):  
84 = 8-wire, 4-circuit
- 5 Top cap profile:  
C = Crowned
- 6 Wireway cover punch option (omit for 18"W):  
➤ See page 14.21 for designators.
- 7 Glass pattern:  
3 = Clear  
9 = Frosted (+\$66)
- 8 Trim finish designator:  
Paint number or  
501 = Platinum Metallic (+10%)
- 9 Hinge color designator
- 10 Side 1 fabric grade
- 11 Side 1 fabric number
- 12 Side 2 fabric grade
- 13 Side 2 fabric number

## Sectional Panels

## Pricing

Five Tiles per Side—Glass/Glass/Glass/Metal/Fabric

GSA SIN 711-1  
COM GSA Non-Contract



				Powered		Non-Powered	
<i>D</i>	<i>W</i>	<i>H</i>	<i>Model</i>	<i>Fabric Price</i> <i>A or COM</i>	<i>Grade</i> <i>B</i>	<i>Fabric Price</i> <i>A or COM</i>	<i>Grade</i> <i>B</i>
80"H							
2"	18"	80¼"	11P1880SGGGMF	—	—	\$1591	\$1647
	24"		11P2480SGGGMF	\$1851	\$1907	1689	1745
	30"		11P3080SGGGMF	1942	1998	1777	1833
	36"		11P3680SGGGMF	2032	2088	1871	1927
	42"		11P4280SGGGMF	2166	2222	2003	2059
	48"		11P4880SGGGMF	2259	2315	2096	2152

18"W panel is available non-powered only; does not accept power entry or receptacles.

Fabric selected for side will apply to all tiles.

Metal pattern selected will apply to both metal tiles.

Use an electronic specification tool for accurate pricing when specifying two different fabric grades on a panel.

Statement of Line	➤ See page 14.2
Planning	14.4
Pricing	14.29
Surface Materials	14.93

### Standard Includes

- Top cap
- One fabric tile per side
- Three glass tiles
- One metal tile per side
- Two base wireway covers
- Two panel hinges
- Two panel glides
- Carpet grippers
- Power distribution assembly on powered panels

### How to Specify


- 1 Model
- 2 Power option:  
P = Powered  
N = Non-powered  
H = Hardwired (+\$70 to non-powered)
- 3 Top cap material:  
P = Paint
- 4 Type of power system (omit for non-powered and hardwired):  
84 = 8-wire, 4-circuit
- 5 Top cap profile:  
C = Crowned
- 6 Wireway cover punch option (omit for 18"W):  
➤ See page 14.21 for designators.
- 7 Glass pattern:  
3 = Clear  
9 = Frosted (+\$66)
- 8 Metal pattern:  
D = Bordered  
S = Smooth
- 9 Trim finish designator:  
Paint number or  
501 = Platinum Metallic (+10%)
- 10 Hinge color designator
- 11 Side 1 fabric grade
- 12 Side 1 fabric number
- 13 Side 2 fabric grade
- 14 Side 2 fabric number

## Sectional Panels

## Pricing

Five Tiles per Side—Glass/Glass/Glass/Mid-Wireway/Fabric

GSA SIN 711-1  
COM GSA Non-Contract



				Powered		Non-Powered	
D	W	H	Model	Fabric Price Grade		Fabric Price Grade	
				A or COM	B	A or COM	B
80"H							
2"	24"	80¼"	11P2480SGGGWF	\$1914	\$1970	—	—
	30"		11P3080SGGGWF	1993	2049	—	—
	36"		11P3680SGGGWF	2077	2133	—	—
	42"		11P4280SGGGWF	2204	2260	—	—
	48"		11P4880SGGGWF	2285	2341	—	—

Fabric selected for side will apply to all tiles.

Mid-wireway cover pattern selected will apply to both mid-wireway covers.

Use an electronic specification tool for accurate pricing when specifying two different fabric grades on a panel.

Statement of Line	➤ See page 14.2
Planning	14.4
Pricing	14.29
Surface Materials	14.93

### Standard Includes

- Top cap
- Three glass tiles
- One fabric tile per side
- Two mid-wireway covers
- Two base wireway covers
- Two panel hinges
- Two panel glides
- Carpet grippers
- Two power distribution assemblies
- Base to mid-wireway jumper

### How to Specify


- 1 Model
- 2 Power option:  
P = Powered
- 3 Top cap material:  
P = Paint
- 4 Type of power system:  
84 = 8-wire, 4-circuit
- 5 Top cap profile:  
C = Crowned
- 6 Wireway cover punch option:  
➤ See page 14.21 for designators.
- 7 Mid-wireway cover punch option:  
➤ See page 14.21 for designators.
- 8 Mid-wireway cover pattern:  
D = Bordered  
S = Smooth
- 9 Glass pattern:  
3 = Clear  
9 = Frosted (+\$66)
- 10 Trim finish designator:  
Paint number or  
501 = Platinum Metallic (+10%)
- 11 Hinge color designator
- 12 Side 1 fabric grade
- 13 Side 1 fabric number
- 14 Side 2 fabric grade
- 15 Side 2 fabric number

## Stackable Panels

12" and 14"H

Pricing

GSA SIN 711-1  
COM GSA Non-Contract



				Fabric		Glass
D	W	H	Model	Fabric Price A or COM	Grade B	Price
12"H Stackable Panels						
	18"	12"	11P1812S	\$392	\$448	\$606
	24"		11P2412S	436	492	667
	30"		11P3012S	499	555	768
	36"		11P3612S	549	605	843
	42"		11P4212S	581	637	893
	48"		11P4812S	608	664	933
	60"		11P6012S	701	757	1076
14"H Stackable Panels						
	18"	14"	11P1814S	\$418	\$474	\$643
	24"		11P2414S	459	515	707
	30"		11P3014S	528	584	812
	36"		11P3614S	580	636	892
	42"		11P4214S	614	670	950
	48"		11P4814S	646	702	992
	60"		11P6014S	739	795	1140

A maximum of two stackable panels may be added on top of a standard panel. Combined panel height may not exceed 80".

➤ See page 14.20 for application guidelines.

Finish channels and end trim must be specified to match combined height of base and stackable panels.

Stackable load brackets are required when mounting overheads on only one side of fabric stackable panels; specified separately. Only the first (lowest) stackable panel is loadbearing.

➤ See page 14.68.

Statement of Line	➤ See page 14.2
Planning	14.4
Pricing	14.29
Surface Materials	14.93

### Standard Includes

- Two panel hinges

### How to Specify

#### Fabric Panels

- 1 Model
- 2 Type of panel:  
F = Fabric
- 3 Trim finish designator:  
Paint number or  
501 = Platinum Metallic (+10%)
- 4 Hinge color designator
- 5 Side 1 fabric grade
- 6 Side 1 fabric number
- 7 Side 2 fabric grade
- 8 Side 2 fabric number

#### Glass Panels


- 1 Model
- 2 Type of tile:  
G = Glass
- 3 Glass:  
3 = Clear  
9 = Frosted (+\$66)
- 4 Trim finish designator:  
Paint number or  
501 = Platinum Metallic (+10%)
- 5 Hinge color designator

## Stackable Panels

### Pricing

18"H

GSA SIN 711-1  
COM GSA Non-Contract



*D W H Model*

### 18"H Stackable Panels

18"	18"	11P1818S	\$463	\$519	\$711
24"		11P2418S	509	565	784
30"		11P3018S	586	642	902
36"		11P3618S	647	703	993
42"		11P4218S	684	740	1055
48"		11P4818S	713	769	1100
60"		11P6018S	822	878	1266

A maximum of two stackable panels may be added on top of a standard panel. Combined panel height may not exceed 80".

➤ See page 14.20 for application guidelines.

Finish channels and end trim must be specified to match combined height of base and stackable panels.

Stackable load brackets are required when mounting overheads on only one side of fabric stackable panels; specified separately. Only the first (lowest) stackable panel is loadbearing.

➤ See page 14.68.

Statement of Line	➤ See page 14.2
Planning	14.4
Pricing	14.29
Surface Materials	14.93

### Standard Includes

- Two panel hinges

### How to Specify

#### Fabric Panels

- 1 Model
- 2 Type of panel:  
**F** = Fabric
- 3 Trim finish designator:  
Paint number or  
**501** = Platinum Metallic (+10%)
- 4 Hinge color designator
- 5 Side 1 fabric grade
- 6 Side 1 fabric number
- 7 Side 2 fabric grade
- 8 Side 2 fabric number

#### Glass Panels


- 1 Model
- 2 Type of tile:  
**G** = Glass
- 3 Glass:  
**3** = Clear  
**9** = Frosted (+\$66)
- 4 Trim finish designator:  
paint number or  
**501** = Platinum Metallic (+10%)
- 5 Hinge color designator

Privacy Panels

Pricing

GSA SIN 711-1  
COM GSA Non-Contract

Statement of Line	➤ See page 14.2
Planning	14.4
Pricing	14.29
Surface Materials	14.93



D	W	H	Model	Fabric Price Grade	
				A or COM	B
Fabric					
1¾"	36"	67½"	10P3668PPF	\$1790	\$1896
	42"		10P4268PPF	1838	1944
D	W	H	Model	Price	
Translucent					
1¾"	36"	67½"	10P3668PPT	\$2359	
	42"		10P4268PPT	2407	

- Standard Includes
- Privacy panel
  - Mounting brackets
  - Caster

- How to Specify
- Fabric
- ① Model
  - ② Frame finish designator:
    - 462 = Cinder
    - 501 = Platinum metallic (+10%)
  - ③ Side 1 fabric grade
  - ④ Side 1 fabric number
  - ⑤ Side 2 fabric grade
  - ⑥ Side 2 fabric number

- Translucent
- ① Model
  - ② Frame finish designator:
    - 462 = Cinder
    - 501 = Platinum metallic (+10%)



When mounting privacy panel in a straight panel run, specify panel to be wider than opening to allow for proper clearance.

Privacy panels can be mounted left or right and are reversible so that different fabrics or marker board can be positioned inside or out.

Hinged Doors

Pricing

GSA SIN 711-1



D	W	H	Model	Price
<b>Right Hinge</b>				<i>Note: Door will swing away from you to the right.</i>
2"	35 <sup>7</sup> / <sub>8</sub> "	80 <sup>1</sup> / <sub>4</sub> "	<b>10P3680DLR</b>	\$2507
	41 <sup>7</sup> / <sub>8</sub> "		<b>10P4280DLR</b>	2680
<b>Left Hinge</b>				<i>Note: Door will swing away from you to the left.</i>
2"	35 <sup>7</sup> / <sub>8</sub> "	80 <sup>1</sup> / <sub>4</sub> "	<b>10P3680DLL</b>	\$2507
	41 <sup>7</sup> / <sub>8</sub> "		<b>10P4280DLL</b>	2680

Doors cannot be placed adjacent to glass panels  
➤See page 14.11 for planning factors.

42"W hinged door is recommended for ADA compliance.

To retrofit hinged door to 10P panels, call Customer Service to obtain required brackets.

Statement of Line	➤See page 14.2
Planning	14.4
Pricing	14.29
Surface Materials	14.93

- Standard Includes**
- Door panel: select solid laminates
  - Frame and threshold
  - Top cap
  - Panel hinges
  - Hardware
  - In-line connector kit
  - Spacer brackets
  - Supplemental brackets

- How to Specify**
- 1 Model
  - 2 Top cap material:  
P = Paint
  - 3 Door hardware:  
LL2 = Locking lever (+\$474)  
X = No lever
  - 4 Top cap profile:  
C = Crowned
  - 5 Trim finish designator:  
Paint number or  
501 = Platinum Metallic (+10%)
  - 6 Hinge color designator
  - 7 Door laminate designator
  - 8 Hinge side of door connects to an 11P panel:  
Y = Yes  
N = No
  - 9 Lever side of door connects to an 11P panel:  
Y = Yes  
N = No
  - 10 Supplemental bracket application on hinge side of door:  
X, L, T, S, V, or Y
  - 11 Supplemental bracket application on lever side of door:  
X, L, T, S, V, or Y

Supplemental Brackets

For Use with 11P or 10P Models

Pricing

GSA SIN 711-1

D	W	L	Model	Price
<b>X Bracket</b>				
1/2"	24"	24"	10PSBPNCX	\$107
<b>T Bracket</b>				
1/2"	12"	24"	10PSBPNCT	\$107
<b>L Bracket</b>				
1/2"	12"	12"	10PSBPNCL	\$107
<b>S Bracket</b>				
1/2"	1/2"	24"	10PSBPNCX	\$107
<b>120° V Bracket</b>				
1/2"	16 1/2"	10"	10PSBPNCV	\$107
<b>120° Y Bracket</b>				
1/2"	16 1/2"	20"	10PSBPNCY	\$107
<b>Stackable Load Brackets</b>				
			10PLBRKT	\$67



Specify supplemental brackets for maximum stability when wing panel is not tied to worksurface at front and back.  
➤See pages 14.14–14.20 for application guidelines.

Statement of Line	➤See page 14.2
Planning	14.4
Pricing	14.29
Surface Materials	14.93

Standard Includes

- Bracket
- Attachment screws

How to Specify

Stackable Load Brackets

- ① Model
- ② Height of stackable panel:  
**12, 14, or 18**
- ③ Paint number or  
**501** = Platinum Metallic (+10%)

All Other Brackets

- ① Model



Supplemental Brackets

Pricing

For Use with 10P Models

GSA SIN 711-1



<i>D</i>	<i>W</i>	<i>L</i>	<i>Model</i>	<i>Price</i>
<b>Supplemental Bracket Spacer</b>				
			<b>10PSBSPCR</b>	No charge

Statement of Line	➤ See page 14.2
Planning	14.4
Pricing	14.29
Surface Materials	14.93

Standard Includes

- Bracket spacer

How to Specify

- ❗ Model

Specify bracket spacer when using a supplemental bracket to reinforce the connection between:


- 10P tackable acoustical (monolithic) panels and 10P sectional or glass panels (old models); or
- 10P tackable acoustical (monolithic) panels and 11P sectional or glass panels.

The bracket spacer will accommodate the difference in the depth of the top channel (cable trough).

Tackboards

Pricing

GSA SIN 711-1  
COM GSA Non-Contract



				Panel Fabric		Seating Fabric	
D	W	H	Model	Price Grade		Price Grade	
				A or COM	B	1	2
Tackboards							
1½"	29½"	15⅛"	10A1530TB	\$206	\$234	\$206	\$240
	35½"		10A1536TB	222	250	222	256
	41½"		10A1542TB	234	262	234	268
	47½"		10A1548TB	258	286	258	292
	59½"		10A1560TB	284	312	284	318
	29½"	19⅛"	10A1930TB	217	245	217	251
	35½"		10A1936TB	226	254	226	260
	41½"		10A1942TB	241	269	241	275
	47½"		10A1948TB	261	289	261	295
	59½"		10A1960TB	290	318	290	324

A maximum of two tackboards may be panel mounted side by side.

Seating fabric is turned 90° and applied railroad style to 60"W tackboards.  
➤ See the *Kimball Surface Materials Reference Guide* at [www.kimball.com](http://www.kimball.com).

15"H tackboards are recommended when using overheads on 62"H Interworks EQ panels.

19"H tackboards are recommended when using overheads on 66"H Interworks EQ panels.

Statement of Line	➤ See page 14.2
Planning	14.4
Pricing	14.29
Surface Materials	14.93

Standard Includes

- Tackboard

How to Specify




- ① Model
- ② Fabric grade
- ③ Fabric number

## Finish Channels

For Same-Height Panel Connections

Pricing

GSA SIN 711-1



T-configurations with one lower-height in-line or perpendicular panel require specification of additional models, including the straight/T finish channel shown on this page.

➤ See page 14.72 for lower-height in-line T configuration.

➤ See page 14.74 for lower-height perpendicular T configuration.

Top caps for use in X configurations with same height panels

➤ See page 14.75.

<i>D</i>	<i>W</i>	<i>H</i>	<i>Model</i>	<i>Price</i>
<b>Straight/T Configurations</b>				
7/16"	2 3/8"	34"	<b>10P34CNT</b>	\$126
		42"	<b>10P42CNT</b>	126
		48"	<b>10P48CNT</b>	126
		54"	<b>10P54CNT</b>	126
		62"	<b>10P62CNT</b>	126
		66"	<b>10P66CNT</b>	126
		80"	<b>10P80CNT</b>	126
<b>Corner/L Configurations</b>				
2 1/8"	2 1/8"	34"	<b>10P34CNL</b>	\$126
		42"	<b>10P42CNL</b>	126
		48"	<b>10P48CNL</b>	126
		54"	<b>10P54CNL</b>	126
		62"	<b>10P62CNL</b>	126
		66"	<b>10P66CNL</b>	126
		80"	<b>10P80CNL</b>	126
<b>120°/V Configurations</b>				
2 1/8"	2 1/8"	34"	<b>10P34CNV</b>	\$126
		42"	<b>10P42CNV</b>	126
		48"	<b>10P48CNV</b>	126
		54"	<b>10P54CNV</b>	126
		62"	<b>10P62CNV</b>	126
		66"	<b>10P66CNV</b>	126
		80"	<b>10P80CNV</b>	126

Statement of Line	➤ See page 14.2
Planning	14.4
Pricing	14.29
Surface Materials	14.93

### Standard Includes

- Finish channel top cap
- Fabric channel
- Metal base cover
- Alignment clip

### How to Specify


- ① Model
- ② Top cap material:  
**P** = Paint
- ③ Top cap profile:  
**C** = Crowned
- ④ Trim finish designator:  
Paint number or  
**501** = Platinum Metallic (+10%)
- ⑤ Fabric grade
- ⑥ Fabric number

## Finish Channels

For Varied-Height 3-Way Connections—One Lower Panel

Pricing

GSA SIN 711-1



<i>D</i>	<i>W</i>	<i>H</i>	<i>Model</i>	<i>Price</i>
2 1/8"	1/2"	4"	<b>11P4CNHT</b>	\$111
		6"	<b>11P6CNHT</b>	111
		8"	<b>11P8CNHT</b>	111
		12"	<b>11P12CNHT</b>	111
		14"	<b>11P14CNHT</b>	111
		18"	<b>11P18CNHT</b>	111
		20"	<b>11P20CNHT</b>	119
		24"	<b>11P24CNHT</b>	119
		26"	<b>11P26CNHT</b>	119
		28"	<b>11P28CNHT</b>	119
		32"	<b>11P32CNHT</b>	126
		38"	<b>11P38CNHT</b>	126
		46"	<b>11P46CNHT</b>	126

Select finish channel based on the difference in panel heights.

**IMPORTANT:** T-configurations with one lower-height inline panel (as shown on this page) require specification of an additional finish channel model and a top cap not on this page:

- Same-height straight/T finish channel the same height as the lower panel (10P\*\*CNT); and
- 3-way/T top cap (10PCNTTC5 or 10PCNTTC6) to sit between the straight/T finish channel and the varied-height 3-way finish channel.


➤See page 14.74 for T-configurations with one lower-height perpendicular panel.

Straight/T finish channels

➤See page 14.71.

3-way/T top caps

➤See page 14.75.

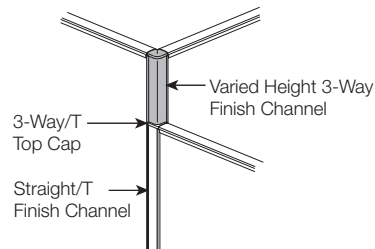

Statement of Line	➤See page 14.2
Planning	14.4
Pricing	14.29
Surface Materials	14.93

### Standard Includes

- Fabric corner/L channel
- Top cap

### How to Specify

- ① Model
- ② End trim material:  
**P** = Paint
- ③ Top cap profile:  
**C** = Crowned
- ④ Trim finish designator:  
Paint number or  
**501** = Platinum Metallic (+10%)
- ⑤ Fabric grade
- ⑥ Fabric number


Finish Channels

For Varied-Height 4-Way Connections — One Lower Panel

Pricing

GSA SIN 711-1

Statement of Line	➤ See page 14.2
Planning	14.4
Pricing	14.29
Surface Materials	14.93



<i>D</i>	<i>W</i>	<i>H</i>	<i>Model</i>	<i>Price</i>
<b>4-Way with One Lower-Height Panel</b>				
7/16"	2 3/8"	4"	<b>10P4CNHL</b>	\$101
		6"	<b>10P6CNHL</b>	101
		8"	<b>10P8CNHL</b>	101
		12"	<b>10P12CNHL</b>	101
		14"	<b>10P14CNHL</b>	101
		18"	<b>10P18CNHL</b>	101
		20"	<b>10P20CNHL</b>	101
		24"	<b>10P24CNHL</b>	101
		26"	<b>10P26CNHL</b>	101
		28"	<b>10P28CNHL</b>	101
		32"	<b>10P32CNHL</b>	101
		38"	<b>10P38CNHL</b>	101
		46"	<b>10P46CNHL</b>	101

Standard Includes

- Finish channel top cap
- Fabric channel
- Alignment clip
- In-line fill cap

How to Specify

- 1 Model
- 2 Top cap material:  
P = Paint
- 3 Top cap profile:  
C = Crowned
- 4 Trim finish designator:  
Paint number or  
501 = Platinum Metallic (+10%)
- 5 Fabric grade
- 6 Fabric number


Select finish channel based on the difference in panel heights.

Finish Channels


Pricing

For Varied-Height 4-Way Connections — Two Lower Panels

GSA SIN 711-1



Select finish channel based on the difference in panel heights.



Models on this page can also be used to create T-configurations with one lower-height perpendicular panel.

Specify:

- Varied-height 4-way/X with two lower-height panels finish channel (10P\*\*CNHLL) for the side with the lower-height perpendicular panel; and
- Same-height straight/T finish channel in the appropriate height for the straight side (10P\*\*CNT).

Note: One of the fabric channels included with the varied-height model will not be used.

Straight/T finish channels  
➤See page 14.71.

D	W	H	Model	Price
4-Way with Two Lower-Height In-Line Panels				
7/16"	2 3/8"	4"	10P4CNHLL	\$108
		6"	10P6CNHLL	108
		8"	10P8CNHLL	108
		12"	10P12CNHLL	108
		14"	10P14CNHLL	108
		18"	10P18CNHLL	108
		20"	10P20CNHLL	108
		24"	10P24CNHLL	108
		26"	10P26CNHLL	108
		28"	10P28CNHLL	108
		32"	10P32CNHLL	108
		38"	10P38CNHLL	108
		46"	10P46CNHLL	108

Statement of Line	➤See page 14.2
Planning	14.4
Pricing	14.29
Surface Materials	14.93

Standard Includes

- Finish channel top cap
- Two fabric channels
- Two alignment clips
- Two in-line fill caps


How to Specify

- 1 Model
- 2 Top cap material:  
P = Paint
- 3 Top cap profile:  
C = Crowned
- 4 Trim finish designator:  
Paint number or  
501 = Platinum Metallic (+10%)
- 5 Fabric grade
- 6 Fabric number

Trim Top Caps

Pricing

GSA SIN 711-1

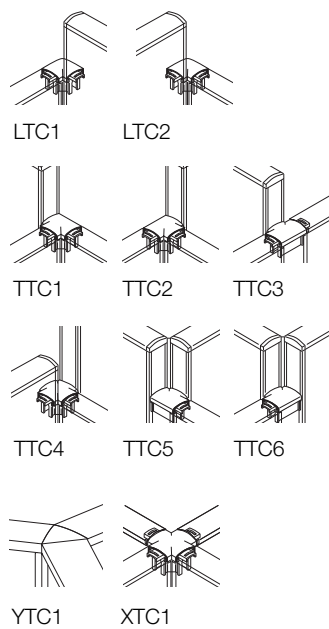

Select appropriate top cap for your application based on drawings at left.

When using a 3-way/T top cap, specify a straight finish channel that is the same height as the lower panels.

When using a 3-way varied-height finish channel, specify a 10PCNTTC5 or 10PCNTTC6 top cap, as well with a straight/T finish channel.

➤See page 14.72.

For 10PCNLTC1 and 10PCNLTC2, 10PCNTTC1, 10PCNTTC2, 10PCNTTC3, and 10PCNTTC4, specify a hi-lo end trim for the exposed edge of the higher panel.

➤See page 14.80.

Model	Description	Price
<b>Corner/L Top Caps</b>		
10PCNLTC1	Tops 2 varied height 90° perpendicular panels at low panels.	\$35
10PCNLTC2	Tops 2 varied height 90° perpendicular panels at low panels.	35
<b>3-Way/T Top Caps</b>		
10PCNTTC1	Tops 3 varied height panels (2 low, 1 high) at low panels.	\$35
10PCNTTC2	Tops 3 varied height panels (2 low, 1 high) at low panels.	35
10PCNTTC3	Tops 3 varied height panels (2 low, 1 high) at low panels.	35
10PCNTTC4	Tops 3 varied height panels (1 low, 2 high) at low panel.	35
10PCNTTC5	Tops 3 varied height panels (1 low, 2 high) at low panel.	35
10PCNTTC6	Tops 3 varied height panels (1 low, 2 high) at low panel.	35
<b>3-Way/Y 120° Top Cap</b>		
10PCNYTC1	Tops 3 same height panels	\$35
<b>4-Way/X Top Caps</b>		
10PCNXTC1	Tops 4 same height panels (4 high) at all panels. Includes two alignment clips.	\$35

Statement of Line	➤See page 14.2
Planning	14.4
Pricing	14.29
Surface Materials	14.93

Standard Includes

- In-Line Fill Cap**
- Fill cap
  - Straight alignment clip
- In-Line Connector Kit**
- 2 in-line connectors
  - 2 straight alignment clips



How to Specify

- 1 Model
- 2 Top cap material:  
P = Paint
- 3 Top cap profile:  
C = Crowned
- 4 Finish designator:  
Paint number or  
501 = Platinum Metallic (+10%)

In-Line Fill Caps

Pricing

GSA SIN 711-1



Model	Description	Price
<b>In-Line Fill Cap</b>		
10PCNIFC	Fills gap between two in-line panels of varied height in straight panel run. For use with 10P and 11P panel models.	\$32
<b>In-Line Connector Kit</b>		
10PCNIL	Set of 2. For use in same-height 10P and 11P panel applications.	\$35

Statement of Line	➤ See page 14.2
Planning	14.4
Pricing	14.29
Surface Materials	14.93

Standard Includes

- In-Line Fill Cap**
- Fill cap
  - Straight alignment clip

- In-Line Connector Kit**
- 2 in-line connectors
  - 2 straight alignment clips

How to Specify

- ① Model
- ② Top cap material:  
P = Paint
- ③ Top cap profile:  
C = Crowned
- ④ Finish designator:  
Paint number or  
501 = Platinum Metallic (+10%)




End Caps

Pricing

For Use with 10P Models Only

GSA SIN 711-1



Model	Description	Price
<b>Side Rail End Cap</b>		
10PCNSREC	Covers top channel opening wherever panel side rail is exposed. Set of 6. For use with 10P panel models only.	\$35
<b>Wireway End Cap</b>		
10PCNEC	Covers base of panel at end of panel run. Set of 6. For use with 10P panel models only.	\$35

Statement of Line	➤ See page 14.2
Planning	14.4
Pricing	14.29
Surface Materials	14.93

Standard Includes

- End Cap


How to Specify

- ① Model
- ② Top cap material  
(omit for wireway end cap):  
P = Paint
- ③ Top cap profile  
(omit for wireway end cap):  
C = Crowned
- ④ Finish designator:  
Paint number or  
501 = Platinum Metallic (+10%)

Full-Height End Trim

Pricing

GSA SIN 711-1



<i>D</i>	<i>W</i>	<i>H</i>	<i>Model</i>	<i>Price</i>
21½"	1½"	34"	<b>10P34EC</b>	\$88
		42"	<b>10P42EC</b>	88
		48"	<b>10P48EC</b>	88
		54"	<b>10P54EC</b>	88
		62"	<b>10P62EC</b>	88
		66"	<b>10P66EC</b>	88
		80"	<b>10P80EC</b>	88

Statement of Line	➤ See page 14.2
Planning	14.4
Pricing	14.29
Surface Materials	14.93

Standard Includes

- End trim

How to Specify

- ① Model
- ② End trim material:  
P = Paint
- ③ Top cap profile:  
C = Crowned
- ④ Trim finish designator:  
Paint number or  
501 = Platinum Metallic (+10%)

Hi-Lo End Trim

For Use at In-Line Connections

Pricing

GSA SIN 711-1


Statement of Line	➤ See page 14.2
Planning	14.4
Pricing	14.29
Surface Materials	14.93

Standard Includes

- Vertical end trim
- Two in-line fill caps

How to Specify

- ① Model
- ② End trim material:  
P = Paint
- ③ Top cap profile:  
C = Crowned
- ④ Trim finish designator:  
Paint number or  
501 = Platinum Metallic (+10%)




<i>D</i>	<i>W</i>	<i>H</i>	<i>Model</i>	<i>Price</i>
2 1/8"	1/2"	4"	<b>10P4HTC</b>	\$101
		6"	<b>10P6HTC</b>	101
		8"	<b>10P8HTC</b>	101
		12"	<b>10P12HTC</b>	101
		14"	<b>10P14HTC</b>	101
		18"	<b>10P18HTC</b>	101
		20"	<b>10P20HTC</b>	107
		24"	<b>10P24HTC</b>	107
		26"	<b>10P26HTC</b>	107
		28"	<b>10P28HTC</b>	107
		32"	<b>10P32HTC</b>	107
		38"	<b>10P38HTC</b>	107
		46"	<b>10P46HTC</b>	107

## Hi-Lo End Trim

For Use at L or T Connections

Pricing

GSA SIN 711-1



<i>D</i>	<i>W</i>	<i>H</i>	<i>Model</i>	<i>Price</i>
2 1/8"	1/2"	4"	<b>11P4HLT</b>	\$66
		6"	<b>11P6HLT</b>	66
		8"	<b>11P8HLT</b>	66
		12"	<b>11P12HLT</b>	66
		14"	<b>11P14HLT</b>	66
		18"	<b>11P18HLT</b>	66
		20"	<b>11P20HLT</b>	73
		24"	<b>11P24HLT</b>	73
		26"	<b>11P26HLT</b>	73
		28"	<b>11P28HLT</b>	73
		32"	<b>11P32HLT</b>	73
		38"	<b>11P38HLT</b>	73
		46"	<b>11P46HLT</b>	73

Statement of Line	➤ See page 14.2
Planning	14.4
Pricing	14.29
Surface Materials	14.93

### Standard Includes

- Vertical end trim
- In-line fill cap

### How to Specify

- ① Model
- ② End trim material:  
**P** = Paint
- ③ Top cap profile:  
**C** = Crowned
- ④ Trim finish designator:  
Paint number or  
**501** = Platinum Metallic (+10%)



- Corner/L and 3-way/T top caps  
➤ See page 14.75.

## Connectors

Pricing

### Traxx Starter Kits

GSA SIN 711-1



Specify the starter to match the height of the panel.

Traxx Panel Starter Kit includes only the necessary hardware to attach panel perpendicular to Traxx.

Selection and purchase of the proper attachment fasteners for your wall is the responsibility of the installer.

In-line filler cap, included, is used to fill the gap at top of panel side rail when using Traxx panel starter kit or panel wall mount.

<i>D</i>	<i>W</i>	<i>H</i>	<i>Model</i>	<i>Description</i>	<i>Price</i>
<b>Traxx Starter Kits</b>					
1/4"	2"	29 7/8"	<b>10P34CNS</b>	For use with 34"H panel.	\$152
		37 7/8"	<b>10P42CNS</b>	For use with 42"H panel.	152
		43 7/8"	<b>10P48CNS</b>	For use with 48"H panel.	152
		49 7/8"	<b>10P54CNS</b>	For use with 54"H panel.	152
		57 7/8"	<b>10P62CNS</b>	For use with 62"H panel.	152
		61 7/8"	<b>10P66CNS</b>	For use with 66"H panel.	152
		75 7/8"	<b>10P80CNS</b>	For use with 80"H panel.	152

#### Related Products:

<i>D</i>	<i>W</i>	<i>H</i>	<i>Model</i>	<i>Description</i>	<i>Price</i>
<b>Traxx Panel-Height Full End Trim</b>					
3/4"	1 1/2"	66"	<b>10P66CNETP</b>	For 66"H or shorter Interworks EQ panel. Use when using Traxx Panel Starter Kit at exposed end of Traxx (full to the floor). Specify paint to match adjoining panel.	\$150

Statement of Line	➤ See page 14.2
Planning	14.4
Pricing	14.29
Surface Materials	14.93

#### Standard Includes

- Traxx starter
- In-line filler cap

#### How to Specify

##### Traxx Starter Kit

- ① Model
- ② Top cap material (omit for end trim):  
**P** = Paint
- ③ Trim finish designator:  
paint number or  
**501** = Platinum Metallic (+10%)

##### End Trim


- ① Model
- ② Finish price group:  
**STD** = Group 1  
**STD M** = Group M (+10%)
- ③ Trim finish designator:  
paint number or  
**501** = Platinum Metallic (+10%)

Connectors

Pricing

Wall-Mount

GSA SIN 711-1



D	W	H	Model	Description	Price
<b>Wall-Mount Connector</b>					
1/4"	2"	297/8"	<b>10P34CNWMP</b>	For use with 34"H panel.	\$141
		377/8"	<b>10P42CNWMP</b>	For use with 42"H panel.	141
		437/8"	<b>10P48CNWMP</b>	For use with 48"H panel.	141
		497/8"	<b>10P54CNWMP</b>	For use with 54"H panel.	141
		577/8"	<b>10P62CNWMP</b>	For use with 62"H panel.	141
		617/8"	<b>10P66CNWMP</b>	For use with 66"H panel.	141
		757/8"	<b>10P80CNWMP</b>	For use with 80"H panel.	141

Specify the starter to match the height of the panel.

Selection and purchase of the proper attachment fasteners for your wall is the responsibility of the installer.

In-line filler cap, included, is used to fill the gap at top of panel side rail when using or panel wall mount.

Specify same height panel.

Statement of Line	➤ See page 14.2
Planning	14.4
Pricing	14.29
Surface Materials	14.93

Standard Includes

- In-line fill cap

How to Specify


- ① Model
- ② Finish designator:  
Paint number or  
**501** = Platinum Metallic (+10%)

Electrical Components

Pricing

Power Distribution Assemblies

GSA SIN 711-1



Model	Description	Function	Price
Power Distribution Assemblies			
10P24ED	For 24"W panel	Carries power to receptacles	\$162
10P30ED	For 30"W panel	Carries power to receptacles	162
10P36ED	For 36"W panel	Carries power to receptacles	162
10P42ED	For 42"W panel	Carries power to receptacles	162
10P48ED	For 48"W panel	Carries power to receptacles	162
10P60ED	For 60"W panel	Carries power to receptacles	162

Power distribution assemblies accom-  
modate up to 4 receptacles.

Prior to 2007, Interworks used an  
unshielded 6-wire and 4-wire system.  
“Transitioning” models enable connec-  
tion of previous- generation electrical  
system with the current 8-wire sys-  
tem.

Statement of Line	➤ See page 14.2
Planning	14.4
Pricing	14.29
Surface Materials	14.93

Standard Includes

- Power distribution assembly

How to Specify


- ① Model
- ② Type of electrical system:  
84 = 8-wire, 4-circuit

## Electrical Components

Pricing

### Jumper Cables

GSA SIN 711-1



Model	Description	Function	Price
<b>Jumper Cables</b>			
<b>10PEJA</b>	From panel to panel	Routes power panel to panel	\$80
<b>10PEJB</b>	Thru finish channel	Routes power panel to panel straight through in-line finish channel or X connection	80
<b>10PEJC</b>	Thru 90° or 120° connection	Routes power panel to panel around a turn	80
<b>10P18EPTA</b>	Thru 18"W panel	Routes power panel to panel through 18"W panel	206
<b>10P18EPTB</b>	Thru finish channel AND 18"W panel	Routes power panel to panel straight through in-line finish channel or X connection and an 18"W panel	206
<b>Shielded Jumper Cables</b>			
<b>10PEJAS</b>	From panel to panel	Routes power panel to panel; shielded with metal conduit	\$129
<b>10PEJBS</b>	Thru finish channel	Routes power panel to panel straight through in-line finish channel or X connection; shielded with metal conduit	129
<b>10PEJCS</b>	Thru 90° or 120° connection	Routes power panel to panel around a turn; shielded with metal conduit	129
<b>Jumper Cables for Transitioning from IP models to 10P or 11P Models</b>			
<i>Transitioning from 6-Wire to 8-Wire</i>			
<b>10PEJA68</b>	From panel to panel	Routes power panel to panel	\$206
<b>10PEJB68</b>	Thru finish channel OR 90° or 120° connection	Routes power panel to panel straight through in-line finish channel, X connection, or around a turn	206
<i>Transitioning from 4-Wire to 8-Wire</i>			
<b>10PEJA48</b>	From panel to panel	Routes power panel to panel	206
<b>10PEJB48</b>	Thru finish channel OR 90° or 120° connection	Routes power panel to panel straight through in-line finish channel, X connection, or around a turn	206

Statement of Line	➤ See page 14.2
Planning	14.4
Pricing	14.29
Surface Materials	14.93

#### Standard Includes

- Jumper cable

#### How to Specify

- ① Model
- ② Type of electrical system (omit for transitioning jumpers):  
**84** = 8-wire, 4-circuit

Prior to 2007, Interworks used an unshielded 6-wire and 4-wire system. "Transitioning" models enable connection of previous-generation electrical system with the current 8-wire system.




Electrical Components

Pricing

Receptacles and Power Entries

GSA SIN 711-1

Model	Description	Function	Price
<b>Duplex Receptacles</b>			
<i>For 3 + 1 Circuit Configuration</i>			
10PER1	Circuit 1	Delivers power from circuit 1 with shared neutral and ground	\$41
10PER2	Circuit 2	Delivers power from circuit 2 with shared neutral and ground	41
10PER3	Circuit 3	Delivers power from circuit 3 with shared neutral and ground	41
10PER4	Circuit 4 (dedicated)	Delivers power from dedicated circuit 4 with ded. neutral and ground	41
<i>For 2 + 2 Circuit Configuration</i>			
10PER1	Circuit 1	Delivers power from circuit 1 with shared neutral and ground	\$41
10PER2	Circuit 2	Delivers power from circuit 2 with shared neutral and ground	41
10PER4	Circuit 4 (designated)	Delivers power from desig. circuit 4 with shared neutral and ground	41
10PER5	Circuit 5 (designated)	Delivers power from desig. circuit 5 with shared neutral and ground	41
<b>Base Power Entry</b>			
10PEFPE1S	Straight base power entry	Provides access to power from the floor or wall; 120"L	\$297
10PEFPE1L	Corner base power entry	Provides access to power from the floor or wall; 120"L	297
10PEFPE1E	End base power entry	Provides access to power from the floor or wall; 120"L	297
10PESPE1P	Side base power entry	Provides access to power from the floor or wall; 72"L	297
<b>Ceiling Power Entry Assembly</b>			
10PECPE1	8-wire	Provides access to power from the ceiling. For use with ceiling power entry panel or power/data pole, specified separately. Access to ceiling power source is regulated by National Code to maximum 12 ft. conduit.	\$297

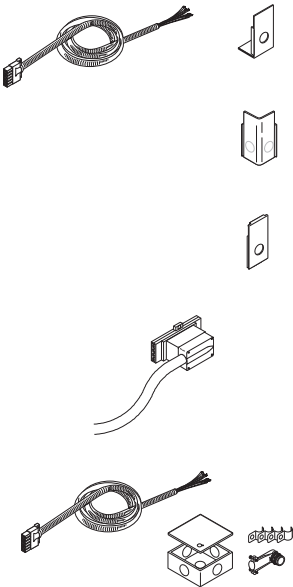

Statement of Line	➤ See page 14.2
Planning	14.4
Pricing	14.29
Surface Materials	14.93

Standard Includes

Receptacle

- Receptacle

Floor Power Entry

- Conduit is 1/2" trade size; actual outside diameter is 7/8"
- Cover plate for straight

Ceiling Power Entry Assembly

- Junction box
- Jumper cable
- Hardware

How to Specify

- 1 Model
- 2 Type of electrical system:  
84 = 8-wire, 4-circuit


Electrical Components

Pricing

Hardwire

GSA SIN 711-1

Model	Description	Function	Price
<b>Junction Box Kit</b>			
10PEHJB		Required for field installation of hardwired electrical. Includes junction box and two end caps with knockouts: 462 Cinder	\$62
<b>Side Feed Plates</b>			
10PEHSFP	Set of 4	For side in-feed of power using hardwire junction box	\$40
<b>End Caps for Hardwire Applications</b>			
10PEHEC	End	Replaces wireway end cap at in-feed; 462 Cinder	\$34
10PEHCC	Corner	Replaces corner finish channel cover at in-feed; 462 Cinder	34
10PEHSC	Straight	Replaces straight finish channel cover at in-feed; 462 Cinder	34
<b>Raceway Removal Tool</b>			
10PRT2R	Set of 2	Tool is required to remove hardwire raceway covers	No charge

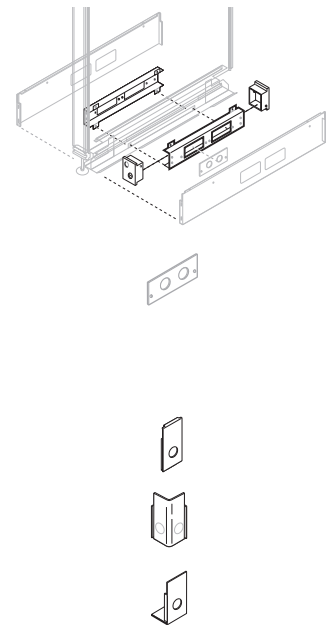

Standard duplex access is not available in 30"W or 36"W panels. Leviton brand or equivalent modular duplexes are required.

Junction box is required for field installation of hardwire electrical; not for use in 18"W panels.

Specify one raceway removal tool per order when specifying hardwire panels.

Statement of Line	➤ See page 14.2
Planning	14.4
Pricing	14.29
Surface Materials	14.93

How to Specify

Junction Box

- ① Model
- ② Width of panel

Side Feed Plates, End Caps, and Raceway Removal Tool


- ① Model






Electrical Components

Pricing

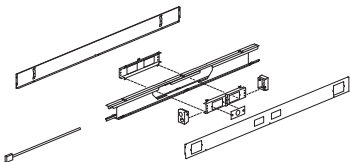New York City

GSA SIN 711-1



Model	Description	Price
<b>New York City Retrofit Kits</b>		
10P30EHPA 	For 30"W panel	\$1026
10P36EHPA 	For 36"W panel	1026
10P42EHPA 	For 42"W panel	1026
10P48EHPA 	For 48"W panel	1026
10P60EHPA 	For 60"W panel	1026

Statement of Line	➤ See page 14.2
Planning	14.4
Pricing	14.29
Surface Materials	14.93

Standard Includes

- Internal wireway with hardwire electrical system
- Jumper cable
- Junction box assembly
- Two end caps: 462 Cinder
- Wireway covers; one with knock-outs to punch as needed, one blank.

How to Specify

- ① Model
- ② Finish designator:  
Paint number or  
501 = Platinum Metallic (+10%)

NYC electrical is only required in starter panels (first panel in run)

They are not for use in 18"W or 24"W panels.

Power/Data Poles

Pricing

GSA SIN 711-1


Statement of Line	➤ See page 14.2
Planning	14.4
Pricing	14.29
Surface Materials	14.93

Standard Includes

- Poles
- Cover
- Ceiling plate
- Appropriate base cover
- Alignment clips
- In-line fill caps

How to Specify

- 1 Model
- 2 Top cap profile:  
C = Crowned
- 3 Finish designator:  
Paint number or  
501 = Platinum Metallic (+10%)

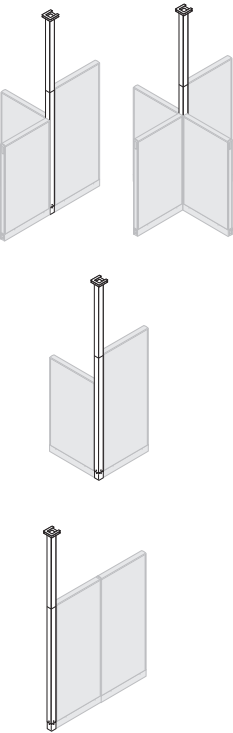

D	W	H	Model	Function	Price
<b>Straight/T or 4-Way/X</b>					
2 1/8"	2 1/8"	10'	10PCPDSP	Used to run voice/data cables and/or electrical from ceiling to panel	\$167
<b>Corner/L</b>					
2 1/8"	2 1/8"	10'	10PCPDLP	Used to run voice/data cables and/or electrical from ceiling to panel	\$167
<b>End</b>					
2 1/8"	2 1/8"	10'	10PCPDPEP	Used to run voice/data cables and/or electrical from ceiling to panel	\$167

Poles accommodate up to two ceiling power entry assemblies, specify separately.

Ceiling power entry assembly  
➤ See page 14.85.



Data Components

Pricing

GSA SIN 711-1

Model	Description	Function	Price
<b>Data Cover Plates</b>			
10PECP1	Painted/grommet;	Used to run voice/data into panel. Set of 6.	\$51
10PEHRCP	Painted	Covers access windows no longer in use. Set of 6.	51
<b>Tinnerman Clips</b>			
10ATMC	Package of 100	Attaches to cutout to provide screw location for attachment of coverplates and data ports. Order additional Tinnerman clips only when using cover plates or data ports purchased commercially.	\$32

Statement of Line	➤ See page 14.2
Planning	14.4
Pricing	14.29
Surface Materials	14.93

Standard Includes

- Cover plate or clips

How to Specify

- Cover Plates**
- ① Model
  - ② Finish designator:  
Paint number or  
501 = Platinum Metallic (+10%)


- Tinnerman Clips**
- ① Model

Data Channels

Pricing

Straight/T and Corner/L

GSA SIN 711-1



<i>D</i>	<i>W</i>	<i>H</i>	<i>Model</i>	<i>Price</i>
<b>Straight/T Data Channels</b>				
2 1/8"	2 1/8"	42"	10P42EDCT	\$142
		48"	10P48EDCT	142
		54"	10P54EDCT	142
		62"	10P62EDCT	142
		66"	10P66EDCT	142
		80"	10P80EDCT	142
<b>Corner/L Data Channels</b>				
2 1/8"	2 1/8"	42"	10P42EDCL	\$142
		48"	10P48EDCL	142
		54"	10P54EDCL	142
		62"	10P62EDCL	142
		66"	10P66EDCL	142
		80"	10P80EDCL	142

Communication channels are used to run voice/data cables through two adjacent panels at different heights.

Knockouts are provided at each panel height to allow for communication access.

Statement of Line	➤ See page 14.2
Planning	14.4
Pricing	14.29
Surface Materials	14.93

Standard Includes

- Cover
- Channel top cap
- Base cover
- Alignment clip
- In-line fill caps

How to Specify


- 1 Model
- 2 Top cap material:  
P = Paint
- 3 Top cap profile  
C = Crowned
- 4 Finish designator:  
Paint number or  
501 = Platinum Metallic (+10%)

Data Channels

Pricing

In-Line

GSA SIN 711-1



D	W	H	Model	Price
In-Line Data Channels				
2 1/8"	2 1/8"	4"	10P04EDCI	\$88
		6"	10P06EDCI	88
		8"	10P08EDCI	88
		12"	10P12EDCI	88
		14"	10P14EDCI	88
		18"	10P18EDCI	88
		20"	10P20EDCI	88
		24"	10P24EDCI	88
		26"	10P26EDCI	88
		28"	10P28EDCI	88
		32"	10P32EDCI	88
		38"	10P38EDCI	88
		46"	10P46EDCI	88

Data channels are used to run voice/data cables through two adjacent panels at different heights.

Knockouts are provided at each panel height to allow for communication access.

For 4-way/X configurations, use in-line data channels plus in-line fill caps for each lower panel in the configuration.

Statement of Line	➤ See page 14.2
Planning	14.4
Pricing	14.29
Surface Materials	14.93

Standard Includes

- Cover
- Channel top cap
- Base cover
- In-line fill caps
- Top cap for lower height panel
- Alignment clip

How to Specify

- 1 Model
- 2 Top cap:  
P = Paint
- 3 Width of lower height panel
- 4 Top cap profile (for lower height panel):  
C = Crowned
- 5 Finish designator:  
Paint number or  
501 = Platinum Metallic (+10%)

Vertical Cable Managers

Pricing

GSA SIN 711-1



<i>D</i>	<i>W</i>	<i>H</i>	<i>Model</i>	<i>Description</i>	<i>Price</i>
<b>Black</b>					
7/8"	1"	15 3/8"	<b>10AVCM16B</b>	For use on 62"H panel.	\$19
		19 3/8"	<b>10AVCM20B</b>	For use on 66"H panel.	24
<b>Fabric Covered</b>					
7/8"	1"	15 3/8"	<b>10AVCM16</b>	For use on 62"H panel.	\$36
		19 3/8"	<b>10AVCM20</b>	For use on 66"H panel.	40

Statement of Line	➤ See page 14.2
Planning	14.4
Pricing	14.29
Surface Materials	14.93

Standard Includes

- Vertical cable manager

How to Specify

Fabric-Covered Vertical Cable Managers

- ① Model
- ② Fabric grade
- ③ Fabric number

Black Vertical Cable Managers

- ① Model

Vertical cable managers are used to guide task light cords from overhead to standard worksurface height.



Statement of Line	➤ See page 14.2
Planning	14.4
Pricing	14.29
Surface Materials	14.93

- See the *Surface Materials Reference Guide* at [www.kimball.com](http://www.kimball.com) for a complete overview of the Kimball materials program, including:
- Characteristics of wood
  - Special wood finishes
  - Customer-specified laminate (CSL)
  - Customer-specified paint (CSP)
  - Fabric application and colorways
  - Customer's own material (COM) overview
  - Alliance program
  - TB133 process

Customer-specified laminate (CSL) is available on HPL models.

➤ See the *Surface Materials Reference Guide* at [www.kimball.com](http://www.kimball.com).

HPL

- Applies to:
- Door

Woodgrain

- MC Amber
- MH Mocha

Solid

- 480 Antique White
- 403 Chamois
- 462 Cinder
- 440 Cloud
- 405 Designer White
- 450 Fog
- 461 Graphite
- 420 Sandstone
- 425 Shadow
- 460 Storm

Statement of Line	➤ See page 14.2
Planning	14.4
Pricing	14.29
Surface Materials	14.93

- See the *Surface Materials Reference Guide* at [www.kimball.com](http://www.kimball.com) for a complete overview of the Kimball materials program, including:
- Characteristics of wood
  - Special wood finishes
  - Customer-specified laminate (CSL)
  - Customer-specified paint (CSP)
  - Fabric application and colorways
  - Customer's own material (COM) overview
  - Alliance program
  - TB133 process

Paint

*Applies to:*

- All painted surfaces

Price Group 1

- 480 Antique White
- 403 Chamois
- 462 Cinder
- 440 Cloud
- 485 Dark Chocolate
- 405 Designer White
- 450 Fog
- 461 Graphite
- 420 Sandstone
- 425 Shadow
- 460 Storm

Price Group M

- 501 Platinum Metallic

Polymer

*Applies to:*

- Panel hinges

Price Group 1

- 480 Antique White
- 403 Chamois
- 462 Cinder
- 440 Cloud
- 485 Dark Chocolate
- 405 Designer White
- 450 Fog
- 461 Graphite
- 420 Sandstone
- 425 Shadow
- 460 Storm

Statement of Line	➤ See page 14.2
Planning	14.4
Pricing	14.29
Surface Materials	14.93

- See the *Surface Materials Reference Guide* at [www.kimball.com](http://www.kimball.com) for a complete overview of the Kimball materials program, including:
- Characteristics of wood
  - Special wood finishes
  - Customer-specified laminate (CSL)
  - Customer-specified paint (CSP)
  - Fabric application and colorways
  - Customer's own material (COM) overview
  - Alliance program
  - TB133 process

Kimball Panel Fabric

*Applies to:*

- Panels

➤ See the *Surface Materials Reference Guide* at [www.kimball.com](http://www.kimball.com) for the most up-to-date list of available fabric patterns.

Price Grade A

- Compose
- Crossroads
- Fusion
- Meander
- Mykel
- Plinth
- Sprite
- Tapestry
- Universe

Price Grade B

- Basket
- Frenzied
- Fuse
- Linen
- Lyko
- Pact
- Prose
- Rivulet
- Savile
- Tenor
- Thicket

IMPORTANT: Interworks EQ panels are available in fabric grades A and B only.

# COM Yardage Requirements

## Surface Materials

GSA Non-Contract

Statement of Line	➤ See page 14.2
Planning	14.4
Pricing	14.29
Surface Materials	14.93

Kimball has analyzed each model to most accurately reflect the yardage requirements.

The yardage requirement for each model is listed for 66"W directional, 66"W non-directional, and 54"W directional, where applicable.

Model	66"W Directional	54"W Directional	66"W Non-Dir.	Model	66"W Directional	54"W Directional	66"W Non-Dir.	Model	66"W Directional	54"W Directional	66"W Non-Dir.
<b>Standard Panels</b>				11P4280A	4.7	4.7	4.7	11P1866SGFFF	3.0	3.0	3.0
11P1834A	2.2	2.2	2.2	11P4834A	2.2	2.2	2.2	11P1866SGFMF	2.5	2.5	2.5
11P1842A	2.5	2.5	2.5	11P4842A	2.5	2.5	2.5	11P1866SGGFF	0.5	0.5	0.5
11P1848A	3.0	3.0	3.0	11P4848A	3.0	3.0	3.0	11P1866SGGMF	1.5	1.5	1.5
11P1854A	3.2	3.2	3.2	11P4854A	3.2	3.2	3.2	11P1880SFFFFF	4.2	4.2	4.2
11P1862A	3.7	3.7	3.7	11P4862A	3.7	3.7	3.7	11P1880SFFFFMF	3.7	3.7	3.7
11P1866A	3.9	3.9	3.9	11P4866A	3.9	3.9	3.9	11P1880SGFFFFF	4.2	4.2	4.2
11P1880A	4.7	4.7	4.7	11P4880A	4.7	4.7	4.7	11P1880SGFFMF	3.7	3.7	3.7
11P2434A	2.2	2.2	2.2	11P6034A	2.0	2.0	2.0	11P1880SGGFFF	3.0	3.0	3.0
11P2442A	2.5	2.5	2.5	11P6042A	2.5	2.5	2.5	11P1880SGGFMF	2.5	2.5	2.5
11P2448A	1.5	1.5	1.5	11P6048A	3.0	3.0	3.0	11P1880SGGGFF	1.5	1.5	1.5
11P2454A	3.2	3.2	3.2	11P6054A	3.2	3.2	3.2	11P1880SGGGMF	1.5	1.5	1.5
11P2462A	3.7	3.7	3.7	11P6062A	3.7	3.7	3.7	11P2434SFF	2.0	2.0	2.0
11P2466A	3.9	3.9	3.9	11P6066A	3.9	3.9	3.9	11P2442SFFF	2.7	2.7	2.7
11P2480A	4.7	4.7	4.7	<b>Sectional Panels</b>				11P2442SFMF	2.2	2.2	2.2
11P3034A	2.2	2.2	2.2	11P1834SFF	2.0	2.0	2.0	11P2442SFWF	2.2	2.2	2.2
11P3042A	2.5	2.5	2.5	11P1842SFFF	2.7	2.7	2.7	11P2448SFFF	3.0	3.0	3.0
11P3048A	3.0	3.0	3.0	11P1842SFMF	2.2	2.2	2.2	11P2448SFMF	2.5	2.5	2.5
11P3054A	3.2	3.2	3.2	11P1848SFFF	3.0	3.0	3.0	11P2448SFWF	2.5	2.5	2.5
11P3062A	3.7	3.7	3.7	11P1848SFMF	2.5	2.5	2.5	11P2448SGFF	2.0	2.0	2.0
11P3066A	3.9	3.9	3.9	11P1848SGFF	2.0	2.0	2.0	11P2448SGMF	1.5	1.5	1.5
11P3080A	4.7	4.7	4.7	11P1848SGMF	1.5	1.5	1.5	11P2448SGWF	1.5	1.5	1.5
11P3634A	2.2	2.2	2.2	11P1854SFFF	3.3	3.3	3.3	11P2454SFFF	3.3	3.3	3.3
11P3642A	2.5	2.5	2.5	11P1854SFMF	2.8	2.8	2.8	11P2454SFMF	2.8	2.8	2.8
11P3648A	3.0	3.0	3.0	11P1854SGFF	2.0	2.0	2.0	11P2454SFWF	2.8	2.8	2.8
11P3654A	3.2	3.2	3.2	11P1854SGMF	1.5	1.5	1.5	11P2454SGFF	2.0	2.0	2.0
11P3662A	3.7	3.7	3.7	11P1862SFFFF	3.0	3.0	3.0	11P2454SGMF	1.5	1.5	1.5
11P3666A	3.9	3.9	3.9	11P1862SFFMF	1.0	1.0	1.0	11P2454SGWF	1.5	1.5	1.5
11P3680A	4.7	4.7	4.7	11P1862SGFFF	3.0	3.0	3.0	11P2462SFFFF	3.0	3.0	3.0
11P4234A	2.2	2.2	2.2	11P1862SGFMF	2.5	2.5	2.5	11P2462SFFMF	2.5	2.5	2.5
11P4242A	2.5	2.5	2.5	11P1862SGGFF	2.0	2.0	2.0	11P2462SFFMF	3.4	3.4	3.4
11P4248A	3.0	3.0	3.0	11P1862SGGMF	1.5	1.5	1.5	11P2462SFFWF	2.5	2.5	2.5
11P4254A	3.2	3.2	3.2	11P1866SFFFF	4.2	4.2	4.2	11P2462SGFFF	3.0	3.0	3.0
11P4262A	3.7	3.7	3.7	11P1866SFFMF	3.7	3.7	3.7	11P2462SGFMF	2.5	2.5	2.5
11P4266A	3.9	3.9	3.9					11P2462SGFWF	2.5	2.5	2.5

### How to Use this Table

- ① Locate the model number
- ② Select yardage from the appropriate column.

If you specify different panel fabrics for opposite sides of a panel, additional yardage may be required.

➤ Contact Customer Care.

If COM fabric is to be "railroaded," contact Customer Care for yardage requirements.

➤ See the *Kimball Surface Materials Reference Guide* at [kimbal.com](http://kimbal.com) for COM policy and additional information.

# COM Yardage Requirements

Surface Materials

continued

GSA Non-Contract

Statement of Line	➤ See page 14.2
Planning	14.4
Pricing	14.29
Surface Materials	14.93

Model	66"W Directional	54"W Directional	66"W Non-Dir.	Model	66"W Directional	54"W Directional	66"W Non-Dir.	Model	66"W Directional	54"W Directional	66"W Non-Dir.
11P2462SGGFF	2.0	2.0	2.0	11P3062SFFFF	3.9	3.9	3.9	11P3648SGWF	1.5	1.5	1.5
11P2462SGGMF	1.5	1.5	1.5	11P3062SFFFF	3.0	3.0	3.0	11P3654SFFF	3.3	3.3	3.3
11P2462SGGWF	1.5	1.5	1.5	11P3062SFFMF	2.5	2.5	2.5	11P3654SFFMF	2.8	2.8	2.8
11P2466SFFFF	4.2	4.2	4.2	11P3062SFFWF	2.5	2.5	2.5	11P3654SFWF	2.8	2.8	2.8
11P2466SFFMF	3.7	3.7	3.7	11P3062SGFFF	3.0	3.0	3.0	11P3654SGFF	2.0	2.0	2.0
11P2466SFFWF	3.7	3.7	3.7	11P3062SGFMF	2.5	2.5	2.5	11P3654SGMF	1.5	1.5	1.5
11P2466SGFFF	3.0	3.0	3.0	11P3062SGFWF	2.5	2.5	2.5	11P3654SGWF	1.5	1.5	1.5
11P2466SGFMF	3.0	3.0	3.0	11P3062SGGFF	2.0	2.0	2.0	11P3662SFFFF	3.9	3.9	3.9
11P2466SGGWF	2.5	2.5	2.5	11P3062SGGMF	1.5	1.5	1.5	11P3662SFFMF	3.4	3.4	3.4
11P2466SGFWF	2.5	2.5	2.5	11P3062SGGWF	1.5	1.5	1.5	11P3662SFFWF	3.4	3.4	3.4
11P2466SGGFF	2.0	2.0	2.0	11P3066SFFFF	4.2	4.2	4.2	11P3662SGFFF	3.0	3.0	3.0
11P2466SGGMF	1.5	1.5	1.5	11P3066SFFMF	3.7	3.7	3.7	11P3662SGFMF	2.5	2.5	2.5
11P2466SGGWF	1.5	1.5	1.5	11P3066SFFWF	2.5	2.5	2.5	11P3662SGFWF	2.5	2.5	2.5
11P2480SFFFF	4.2	4.2	4.2	11P3066SFFMF	3.7	3.7	3.7	11P3662SGGFF	2.0	2.0	2.0
11P2480SFFMF	3.7	3.7	3.7	11P3066SGFFF	3.0	3.0	3.0	11P3662SGGMF	1.5	1.5	1.5
11P2480SFFWF	3.7	3.7	3.7	11P3066SGFMF	2.5	2.5	2.5	11P3662SGGWF	1.5	1.5	1.5
11P2480SGFFF	4.2	4.2	4.2	11P3066SGFWF	2.5	2.5	2.5	11P3666SFFFF	4.2	4.2	4.2
11P2480SGFMF	3.7	3.7	3.7	11P3066SGGFF	2.0	2.0	2.0	11P3666SFFMF	3.7	3.7	3.7
11P2480SGFWF	3.7	3.7	3.7	11P3066SGGMF	1.5	1.5	1.5	11P3666SFFWF	3.7	3.7	3.7
11P2480SGGFF	3.0	3.0	3.0	11P3066SGGWF	1.5	1.5	1.5	11P3666SGFFF	3.0	3.0	3.0
11P2480SGGMF	2.5	2.5	2.5	11P3080SFFFF	4.2	4.2	4.2	11P3666SGFMF	2.5	2.5	2.5
11P2480SGGWF	2.5	2.5	2.5	11P3080SFFMF	3.7	3.7	3.7	11P3666SGFWF	2.5	2.5	2.5
11P2480SGGGFF	2.0	2.0	2.0	11P3080SFFWF	3.7	3.7	3.7	11P3666SGGFF	2.0	2.0	2.0
11P2480SGGGMF	1.5	1.5	1.5	11P3080SGFFF	4.2	4.2	4.2	11P3666SGGMF	1.5	1.5	1.5
11P2480SGGGWF	1.5	1.5	1.5	11P3080SGFFMF	3.7	3.7	3.7	11P3666SGGWF	1.5	1.5	1.5
11P3034SFF	2.0	2.0	2.0	11P3080SGFWF	3.7	3.7	3.7	11P3680SFFFF	5.1	5.1	5.1
11P3042SFFF	2.7	2.7	2.7	11P3080SGGFF	3.0	3.0	3.0	11P3680SFFMF	4.2	4.2	4.2
11P3042SFMF	2.2	2.2	2.2	11P3080SGGMF	2.5	2.5	2.5	11P3680SFFWF	4.6	4.6	4.6
11P3042SFWF	2.2	2.2	2.2	11P3080SGGWF	2.5	2.5	2.5	11P3680SFFGWF	4.6	4.6	4.6
11P3048SFFF	3.0	3.0	3.0	11P3080SGGGFF	2.0	2.0	2.0	11P3680SGFFF	4.2	4.2	4.2
11P3048SFMF	2.5	2.5	2.5	11P3080SGGGMF	1.5	1.5	1.5	11P3680SGFFMF	3.7	3.7	3.7
11P3048SFWF	2.5	2.5	2.5	11P3080SGGGWF	1.5	1.5	1.5	11P3680SGFFWF	3.7	3.7	3.7
11P3048SGFF	2.0	2.0	2.0	11P3634SFF	2.0	2.0	2.0	11P3680SGGFF	3.0	3.0	3.0
11P3048SGMF	1.5	1.5	1.5	11P3642SFFF	2.7	2.7	2.7	11P3680SGGFMF	2.5	2.5	2.5
11P3048SGWF	1.5	1.5	1.5	11P3642SFMF	2.2	2.2	2.2	11P3680SGGFWF	2.5	2.5	2.5
11P3054SFFF	3.3	3.3	3.3	11P3642SFWF	2.2	2.2	2.2	11P3680SGGGFF	2.0	2.0	2.0
11P3054SFMF	2.8	2.8	2.8	11P3648SFFF	3.0	3.0	3.0	11P3680SGGGMF	1.5	1.5	1.5
11P3054SFWF	2.8	2.8	2.8	11P3648SFFMF	2.5	2.5	2.5	11P3680SGGGWF	1.5	1.5	1.5
11P3054SGFF	2.0	2.0	2.0	11P3648SFWF	2.5	2.5	2.5	11P4234SFF	2.0	2.0	2.0
11P3054SGMF	1.5	1.5	1.5	11P3648SGFF	2.0	2.0	2.0	11P4242SFFF	2.7	2.7	2.7
11P3054SGWF	1.5	1.5	1.5	11P3648SGMF	1.5	1.5	1.5	11P4242SFMF	2.2	2.2	2.2

## How to Use this Table

- ① Locate the model number
- ② Select yardage from the appropriate column.

If you specify different panel fabrics for opposite sides of a panel, additional yardage may be required.

➤ Contact Customer Care.

If COM fabric is to be "railroaded," contact Customer Care for yardage requirements.

➤ See the *Kimball Surface Materials Reference Guide* at [kimbal.com](http://kimbal.com) for COM policy and additional information.

# COM Yardage Requirements

Surface Materials

continued

GSA Non-Contract

Statement of Line	➤ See page 14.2
Planning	14.4
Pricing	14.29
Surface Materials	14.93

Model	66"W Directional	54"W Directional	66"W Non-Dir.	Model	66"W Directional	54"W Directional	66"W Non-Dir.	Model	66"W Directional	54"W Directional	66"W Non-Dir.
11P4242SFWF	2.2	2.2	2.2	11P4280SGGGFF	2.0	2.0	2.0	11P4880SFFFFWF	4.6	4.6	4.6
11P4248SFFF	3.0	3.0	3.0	11P4280SGGGMF	1.5	1.5	1.5	11P4880SGFFFF	4.2	4.2	4.2
11P4248SFMF	2.5	2.5	2.5	11P4280SGGGWF	1.5	1.5	1.5	11P4880SGGFMF	3.7	3.7	3.7
11P4248SFWF	2.5	2.5	2.5	11P4834SFF	2.0	2.0	2.0	11P4880SGFFWF	3.7	3.7	3.7
11P4248SGFF	2.0	2.0	2.0	11P4842SFFF	2.7	2.7	2.7	11P4880SGGFFF	3.0	3.0	3.0
11P4248SGMF	1.5	1.5	1.5	11P4842SFMF	2.2	2.2	2.2	11P4880SGGFMF	2.5	2.5	2.5
11P4248SGWF	1.5	1.5	1.5	11P4842SFWF	2.2	2.2	2.2	11P4880SGGFWF	2.5	2.5	2.5
11P4254SFFF	3.3	3.3	3.3	11P4848SFFF	3.0	3.0	3.0	11P4880SGGGFF	2.0	2.0	2.0
11P4254SFMF	2.8	2.8	2.8	11P4848SFMF	2.5	2.5	2.5	11P4880SGGGMF	1.5	1.5	1.5
11P4254SFWF	2.8	2.8	2.8	11P4848SFMF	3.0	3.0	3.0	11P4880SGGGWF	1.5	1.5	1.5
11P4254SGFF	2.0	2.0	2.0	11P4848SFWF	3.0	3.0	3.0	<b>Stackable Panels</b>			
11P4254SGMF	1.5	1.5	1.5	11P4848SGFF	2.0	2.0	2.0				
11P4254SGWF	1.5	1.5	1.5	11P4848SGMF	1.5	1.5	1.5	11P1812SF	0.9	0.9	0.9
11P4262SFFFF	3.9	3.9	3.9	11P4848SGWF	1.5	1.5	1.5	11P1814SF	1.0	1.0	1.0
11P4262SFFMF	3.4	3.4	3.4	11P4854SFFF	3.3	3.3	3.3	11P1818SF	1.2	1.2	1.2
11P4262SFFWF	3.4	3.4	3.4	11P4854SFMF	2.8	2.8	2.8	11P2412SF	0.9	0.9	0.9
11P4262SGFFF	3.0	3.0	3.0	11P4854SFWF	2.8	2.8	2.8	11P2414SF	1.0	1.0	1.0
11P4262SGFMF	2.5	2.5	2.5	11P4854SGFF	2.0	2.0	2.0	11P2418SF	1.2	1.2	1.2
11P4262SGFWF	2.5	2.5	2.5	11P4854SGMF	1.5	1.5	1.5	11P3012SF	0.9	0.9	0.9
11P4262SGGFF	2.0	2.0	2.0	11P4854SGWF	1.5	1.5	1.5	11P3014SF	1.0	1.0	1.0
11P4262SGGMF	1.5	1.5	1.5	11P4862SFFFF	3.9	3.9	3.9	11P3018SF	1.2	1.2	1.2
11P4262SGGWF	1.5	1.5	1.5	11P4862SFFMF	3.4	3.4	3.4	11P3612SF	0.9	0.9	0.9
11P4266SFFFF	4.2	4.2	4.2	11P4862SFFWF	3.4	3.4	3.4	11P3614SF	1.0	1.0	1.0
11P4266SFFMF	3.7	3.7	3.7	11P4862SGFFF	3.0	3.0	3.0	11P3618SF	1.2	1.2	1.2
11P4266SFFWF	4.2	4.2	4.2	11P4862SGFMF	2.5	2.5	2.5	11P4212SF	0.9	0.9	0.9
11P4266SGFFF	3.0	3.0	3.0	11P4862SGFWF	2.5	2.5	2.5	11P4214SF	1.0	1.0	1.0
11P4266SGFMF	2.5	2.5	2.5	11P4862SGGFF	2.0	2.0	2.0	11P4218SF	1.2	1.2	1.2
11P4266SGFWF	2.5	2.5	2.5	11P4862SGGMF	1.5	1.5	1.5	11P4812SF	0.9	0.9	0.9
11P4266SGGFF	2.0	2.0	2.0	11P4862SGGWF	1.5	1.5	1.5	11P4814SF	1.0	1.0	1.0
11P4266SGGMF	1.5	1.5	1.5	11P4866SFFFF	4.2	4.2	4.2	11P4818SF	1.2	1.2	1.2
11P4266SGGWF	1.5	1.5	1.5	11P4866SFFMF	3.7	3.7	3.7	11P6012SF	0.9	0.9	0.9
11P4280SFFFF	5.1	5.1	5.1	11P4866SFFWF	3.7	3.7	3.7	11P6014SF	1.0	1.0	1.0
11P4280SFFMF	4.6	4.6	4.6	11P4866SGFFF	3.0	3.0	3.0	11P6018SF	1.2	1.2	1.2
11P4280SFFWF	3.7	3.7	3.7	11P4866SGFMF	2.5	2.5	2.5	<b>Finish Channels</b>			
11P4280SGFFF	4.2	4.2	4.2	11P4866SGFWF	2.5	2.5	2.5				
11P4280SGFMF	3.7	3.7	3.7	11P4866SGGFF	2.0	2.0	2.0	10P34CNT	1.0	1.0	0.2
11P4280SGFWF	3.7	3.7	3.7	11P4866SGGMF	1.5	1.5	1.5	10P42CNT	1.3	1.3	0.2
11P4280SGGFFF	3.0	3.0	3.0	11P4866SGGWF	1.5	1.5	1.5	10P48CNT	1.4	1.4	0.2
11P4280SGGFMF	2.5	2.5	2.5	11P4880SFFFF	5.1	5.1	5.1	10P54CNT	1.6	1.6	0.2
11P4280SGGFWF	2.5	2.5	2.5	11P4880SFFMF	4.6	4.6	4.6	10P62CNT	1.8	1.8	0.2
								10P66CNT	1.9	1.9	0.2
								10P80CNT	2.3	2.3	2.3

## How to Use this Table

- ① Locate the model number
- ② Select yardage from the appropriate column.

If you specify different panel fabrics for opposite sides of a panel, additional yardage may be required.

➤ Contact Customer Care.

If COM fabric is to be "railroaded," contact Customer Care for yardage requirements.

➤ See the *Kimball Surface Materials Reference Guide* at [kimbal.com](http://kimbal.com) for COM policy and additional information.

## COM Yardage Requirements

continued

Surface Materials

GSA Non-Contract

Statement of Line	➤ See page 14.2
Planning	14.4
Pricing	14.29
Surface Materials	14.93

<i>Model</i>	<i>66"W Directional</i>	<i>54"W Directional</i>	<i>66"W Non-Dir.</i>	<i>Model</i>	<i>66"W Directional</i>	<i>54"W Directional</i>	<i>66"W Non-Dir.</i>
10P34CNL	1.0	1.0	0.2	11P6CNHTP	0.2	0.2	0.2
10P42CNL	1.3	1.3	0.2	11P8CNHTP	0.2	0.2	0.2
10P48CNL	1.4	1.4	0.2	11P12CNHTP	0.2	0.2	0.2
10P54CNL	1.6	1.6	0.2	11P14CNHTP	0.2	0.2	0.2
10P62CNL	1.8	1.8	0.2	11P18CNHTP	0.2	0.2	0.2
10P66CNL	1.9	1.9	0.2	11P20CNHTP	0.2	0.2	0.2
10P80CNL	2.3	2.3	2.3	11P24CNHTP	0.2	0.2	0.2
10P34CNV	1.0	1.0	0.2	11P26CNHTP	0.2	0.2	0.2
10P42CNV	1.3	1.3	0.2	11P28CNHTP	0.2	0.2	0.2
10P48CNV	1.4	1.4	0.2	11P32CNHTP	0.2	0.2	0.2
10P54CNV	1.6	1.6	0.2	11P38CNHTP	0.2	0.2	0.2
10P62CNV	1.8	1.8	0.2	11P46CNHTP	0.2	0.2	0.2
10P66CNV	1.9	1.9	0.2				
10P80CNV	2.3	2.3	2.3				
10P4CNHL	0.2	0.2	0.2				
10P6CNHL	0.3	0.3	0.2				
10P8CNHL	0.3	0.3	0.2				
10P12CNHL	0.4	0.4	0.2				
10P14CNHL	0.5	0.5	0.2				
10P18CNHL	0.6	0.6	0.2				
10P20CNHL	0.6	0.6	0.2				
10P24CNHL	0.8	0.8	0.2				
10P26CNHL	0.8	0.8	0.2				
10P28CNHL	0.9	0.9	0.2				
10P32CNHL	1.0	1.0	0.2				
10P38CNHL	1.1	1.1	0.2				
10P46CNHL	1.4	1.4	0.2				
10P4CNHLL	0.2	0.2	0.2				
10P6CNHLL	0.3	0.3	0.2				
10P8CNHLL	0.3	0.3	0.2				
10P12CNHLL	0.4	0.4	0.2				
10P14CNHLL	0.5	0.5	0.2				
10P18CNHLL	0.6	0.6	0.2				
10P20CNHLL	0.6	0.6	0.2				
10P24CNHLL	0.8	0.8	0.2				
10P26CNHLL	0.8	0.8	0.2				
10P28CNHLL	0.9	0.9	0.2				
10P32CNHLL	1.0	1.0	0.4				
10P38CNHLL	1.1	1.1	0.4				
10P46CNHLL	1.4	1.4	0.4				
11P4CNHTP	0.2	0.2	0.2				

### How to Use this Table

- ① Locate the model number
- ② Select yardage from the appropriate column.

If you specify different panel fabrics for opposite sides of a panel, additional yardage may be required.

➤ Contact Customer Care.

If COM fabric is to be "railroaded," contact Customer Care for yardage requirements.

➤ See the *Kimball Surface Materials Reference Guide* at [kimbal.com](http://kimbal.com) for COM policy and additional information.

Notes

Statement of Line	➤ See page 14.2
Planning	14.4
Pricing	14.29
Surface Materials	14.93