

# Intuity™ Benching

North America Price List / Specification Guide – April 2018



This Haworth North American price book contains US list prices.



Canadian customers can convert the US list price into their Canadian equivalent by going to [www.Haworth.com/Canada](http://www.Haworth.com/Canada) to find the current Canadian multipliers. These multiplier factors allow you to convert the US list price into a Canadian list price.

# Price Book Overview

The following list gives a general overview of the content included within this price book (price list and specification guide) and explains how the book is organized and where information can be found.

## 1 Front Cover

- Includes the title and pricing effectivity date.

## 2 Electronic Update Page / Canadian Conversion

- Electronic versions of the Price Book (.pdf files) will include an Electronic Update Page listing the most recent updates and addendum added since the original version was created. If this section is blank no updates or addendums have been added.
- Each update will include a description, page number, date and a link to the updated or new page.
- The footer contains Canadian conversion information for converting US pricing into the Canadian equivalent.

## 3 Table of Contents

- Price List content with page numbers.

## 4 Price List

Each price list page contains the following:

- Product Illustration
- Catalog Number
- To Order Specify – sequencing for ordering product options and finishes
- List Prices
- Product Specification Dimensions
- Features
- Specification Tips
- Class, Discount Group Number (used for discounting) and GSA information

## 5 Specification Guide

- Table of Contents – specification guide content with page numbers
- Statement of Line – provides a pictorial outline of the product offering
- Product Overview – brief introduction of the product and application intent
- Easy Planning Steps – basic steps of planning with the product line
- Product Details – product attributes, dimensions, surface materials and functionality
- Product Application – vertical and horizontal planning guidelines including support and load, power, and storage
- Technical Specifications – provides performance ratings, material composition and manufacturing process information

## 6 Finishes, Fabrics and COM

- Lists information for material finishes and availability.
- Provides COM information and requirements (if applicable).

## 7 North American Terms of Sale

- Haworth terms for ordering, pricing, shipping and delivery, general terms, and services.

## 8 Index

- Products are listed alphabetically by alpha-numeric catalog numbers with price list page number.

## 9 Product Non-Obsolescence and Warranty Policy

- Provides Haworth policy for non-obsolescence and warranty.

## Additional Information and Resources

Prices are subject to change without notice or approval. Haworth dealers should always submit proposals through Lynx before presenting to customers. See North American Terms of Sale for more information.


### Online Resources

#### [haworth.com](http://haworth.com)

- Haworth's corporate website provides access to price books and a variety of other resources and publications.

#### [surfaces.haworth.com](http://surfaces.haworth.com)

- Website provides access to the most current fabrics and finishes offered across Haworth's various product lines.

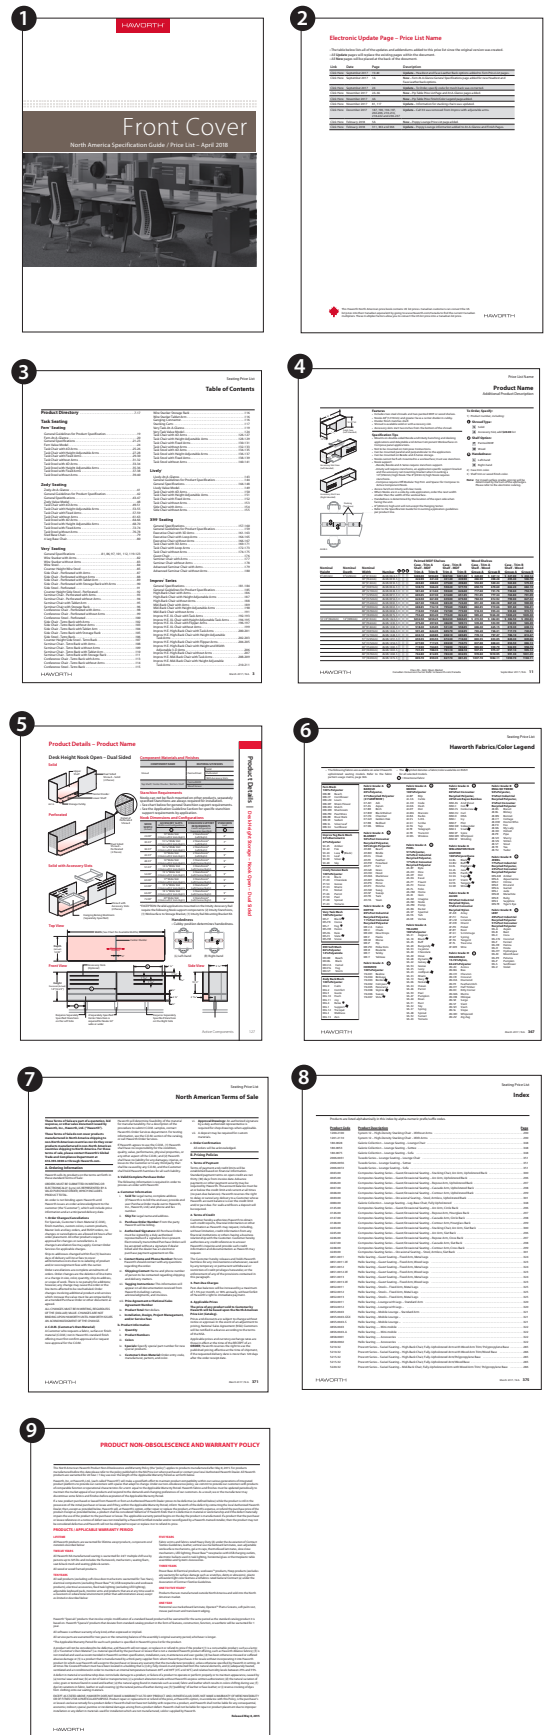

# Table of Contents

## Kits

Single Sided Starter Kit	5
Single Sided Add-On Kit	6
Double Sided Starter Kit	7
Double Sided Add-On Kit	8
120° Single Sided Starter Kit	9
120° Double Sided Three Pack Starter Kit	10
120° Double Sided Three Pack Add-on Kit	11

## Leg Kits

Bench End Leg Kit	12
Return Leg Kit	12

## Worksurfaces

Rectangular Worksurface	13
Rectangular Worksurface – For Use with Access Hatches	14
Rectangular Bench End Worksurface	15
Rectangular Return Worksurface	16
Corner, 120° Wrap-Around	17

## Accessories

Tie Plate	18
Screen Aligner	18
Double-Sided Utility Tray End Covers	18
120° Infeed Cover	18

## Screens

Rail Mounted Screen	20
---------------------	----

## Accessories

Access Hatch Gap Filler	22
Bin	23
Accessory Rail	23
Accessory Rail Mounting Bracket Kit, Single Sided	23
Accessory Rail Mounting Bracket Kit, Double Sided	23

## Electrical Components

Infeed Harness	24
Base Feed Module — Architectural Concealed Hardwire Connection	24
Internal Power Base™ AI Base Feed	25
Jumper	25
Utility Tray Power Retrofit Kit	26
Top Feed	27
Triplex Receptacles — 15 AMP	28
15 Amp Duplex Receptacle with USB Charging Outlet	28
Triplex Receptacles — 20 AMP	29
Top Feed — Hardwire	30
Hardwire Kit	30
Cover Plates	30

## Electrical Accessories

Base Feed Cover — Vertical	31
----------------------------	----

## 1.5H Credenzas with Drawers

48" Wide — Laminate Case with Steel Front	32
60" Wide — Laminate Case with Steel Front	34
72" Wide — Laminate Case with Steel Front	36

## 1.5H Credenzas with Hinged Doors

48" Wide — Laminate Case with Steel Front	38
60" Wide — Laminate Case with Steel Front	41
72" Wide — Laminate Case with Steel Front	45

## X Series Mobile Pedestals

Box/File — Mobile	48
Pencil/Box/File — Mobile	48

## X Series Pedestal Accessories

Pencil Tray	50
Dividers	50
Pedestal Cushion Kit	50

## Finishes and Fabrics

Finish/Color Legend	127
Vertical Fabrics/Color Legend	128-129
Seating Fabrics/Color Legend	130-131

## Terms of Sale

North American	132-135
----------------	---------

## Index


## Lifetime Product Warranty

Inside Back Cover




## Single Sided Kits

## Single Sided Starter Kit



Straight Leg  
ZBRA-2448-SIGH



Angled Leg  
ZBRA-2448-SAGH  
(Shown with 3- or 4-circuit power  
and access hatches)

Depth	Width	Number	①	②	③	Trim A	B
24"(610mm)	48"(1219mm)	ZBRA-2448-S	GHP	T		\$662.80	\$692.96
	54"(1372mm)	ZBRA-2454-S	GHP	T		678.40	708.56
	60"(1524mm)	ZBRA-2460-S	GHP	T		694.00	724.16
	66"(1676mm)	ZBRA-2466-S	GHP	T		709.60	739.76
	72"(1829mm)	ZBRA-2472-S	GHP	T		725.20	755.36
30"(762mm)	48"(1219mm)	ZBRA-3048-S	GHP	T		\$694.00	\$724.16
	54"(1372mm)	ZBRA-3054-S	GHP	T		709.60	739.76
	60"(1524mm)	ZBRA-3060-S	GHP	T		725.20	755.36
	66"(1676mm)	ZBRA-3066-S	GHP	T		740.80	770.96
	72"(1829mm)	ZBRA-3072-S	GHP	T		756.40	786.56

## Features

- Includes two fixed-height leg assemblies, support beam, rail, worksurface support brackets, and integrated below-surface utility tray.
- Available with or without the following:
  - Power distribution assembly
  - Full access hatches for back edge of worksurface
- Fixed-height legs are 28"(711mm) to bottom of worksurface with glides fully recessed.
- Glides provide 1/2"(13mm) leveling adjustment.
- Leg accent plate is located in the top center section of each leg assembly and allows for a user-specified accent color for aesthetic purposes.
- Access hatch option includes two hinged doors that extend the full width of the surface for easy access to power distribution assembly and utility tray. The doors are 4 1/4"(108mm) deep and provide a 1"(25mm) gap between the hatch and worksurface.
- Field assembled

## Specification Tips

- For **in-line** benching applications only; not for return benching applications.
- A Single Sided Starter Kit may be used as a stand alone desk.
- Requires Single Sided Add-On Kit(s) for an in-line single sided benching application. Leg from the Single Sided Starter Kit is repositioned to the end-of-run.
- For use with Intuity worksurface, specified separately.
  - Kit with no access hatches, option (-C) supports a rectangular worksurface.
  - Kit with access hatches, option (-S) supports a rectangular worksurface for use with access hatches.
- Angled Legs are required for Knife Edge worksurface option.
- Rail features an inset channel for use with Intuity Screens and Active Components Center Screens.
- Single Sided Starter Kit is always standard with utility tray in a powered or non-powered application.
- Below worksurface power access is standard with 3-circuit, 4-circuit or hardwire power option.
- In 3- and 4-circuit power applications the Power Distribution Assembly (PDA) will accept a maximum of two separately specified triplex receptacles.
- Hardwire power option (-C) includes two junction boxes; conduit is field supplied.
- Separately specify electrical components for **in** and **out** power path. Do not mix 3-circuit with 4-circuit components. Do not mix 2+2 and 3+1 components.

## To Order, Specify:

- Product number, including:

## ① Leg Type:

- I** Straight Leg
- A** Angled Leg

## ② Power Type:

- N** Non-Powered
- 3** 3-Circuit, see chart for upcharge
- 2** 4-Circuit 2+2, see chart for upcharge
- 4** 4-Circuit, 3+1, see chart for upcharge
- C** Hardwire, see chart for upcharge

## ③ Access Hatches:

- C** No Access Hatches
- S** Access Hatches, add \$140.00 list

- Leg color\*.
- Accent plate color\*.
- Universal rail/utility tray color\*.
- Access hatch color\* (if applicable).


**\*Note:** Upcharge for mixed grade trim surfaces; refer to the electronic design and specification tools for pricing.

## ② Power Type


Width	3-Circuit	4-Circuit, 2+2	4-Circuit, 3+1	Hardwire
48"	\$114.40	\$114.40	\$114.40	\$275.18
54"	119.60	119.60	119.60	284.54
60"	124.80	124.80	124.80	293.90
66"	130.00	130.00	130.00	303.26
72"	135.20	135.20	135.20	312.62

# Single Sided Kits

## Single Sided Add-On Kit



Straight Leg  
ZBRA-2448-ATGH



Angled Leg  
ZBRA-2448-ASGH  
(Shown with 3- or 4-circuit power  
and access hatches)

Depth	Width	Number	①	②	③	Trim A	B
24"(610mm)	48"(1219mm)	ZBRA-2448-A	GHN	T		\$571.28	\$596.24
	54"(1372mm)	ZBRA-2454-A	GHN	T		586.88	611.84
	60"(1524mm)	ZBRA-2460-A	GHN	T		602.48	627.44
	66"(1676mm)	ZBRA-2466-A	GHN	T		618.08	643.04
	72"(1829mm)	ZBRA-2472-A	GHN	T		633.68	658.64
30"(762mm)	48"(1219mm)	ZBRA-3048-A	GHN	T		\$592.08	\$617.04
	54"(1372mm)	ZBRA-3054-A	GHN	T		607.68	632.64
	60"(1524mm)	ZBRA-3060-A	GHN	T		623.28	648.24
	66"(1676mm)	ZBRA-3066-A	GHN	T		638.88	663.84
	72"(1829mm)	ZBRA-3072-A	GHN	T		654.48	679.44

### Features

- Includes one shared, fixed-height leg assembly support beam, rail, worksurface support brackets, and integrated below-surface utility tray.
- Available with or without the following:
  - Power distribution assembly and power jumper
  - Full-width access hatches for back edge of worksurface
- Integrated utility tray on non-powered starter rails provides cable management and routing only.
- Attaches to a Single Sided Starter Kit, or to another Add-On Kit to extend the overall length of the bench.
- Fixed-height legs are 28"(711mm) to bottom of worksurface with glides fully recessed.
- Glides provide 1/2"(13mm) leveling adjustment.
- Power distribution assembly provides locations for two separately specified triplex receptacles, providing below-surface power access at the back edge.
- A power jumper is included to connect adjacent power distribution assemblies.
- Access hatch option includes two hinged doors that extend the full width of the surface for easy access to power distribution assembly and utility tray. The doors are 4 1/4"(108mm) deep and provide a 1"(25mm) gap between the hatch and worksurface.
- Field assembled

### Specification Tips

- For **in-line** benching applications only; not for return benching applications.
- Requires Single Sided Starter Kit for an in-line, single sided benching application. Leg from the Single Sided Starter Kit is repositioned to end of run.
- Multiple Single Sided Add-On Kits may be used with one Single Sided Starter Kit.
- For use with Intuity worksurface, specified separately.
  - Kit with no access hatches, option (-C) supports a rectangular worksurface.
  - Kit with access hatches, option (-S) supports a rectangular worksurface for use with access hatches.
- Angled Legs are required for Knife Edge worksurface option.
- Rail features an inset channel for use with Intuity Screens and Active Components Center Screens.
- Single Sided Add-On Kit is always standard with utility tray in a powered or non-powered application.
- Below worksurface power access is standard with 3-circuit, 4-circuit or hardwire power option.
- In 3- and 4-circuit power applications the Power Distribution Assembly (PDA) will accept a maximum of two separately specified triplex receptacles.
- Hardwire power option (-C) includes two junction boxes; conduit is field supplied.
- Separately specify electrical components for **in** and **out** power path. Do not mix 3-circuit with 4-circuit components. Do not mix 2+2 and 3+1 components.

### To Order, Specify:

- Product number, including:

#### ① Leg Type:

- T** Straight Leg
- S** Angled Leg

#### ② Power Type:

- N** Non-Powered
- 3** 3-Circuit, see chart for upcharge
- 2** 4-Circuit, 2+2, see chart for upcharge
- 4** 4-Circuit, 3+1, see chart for upcharge
- C** Hardwire, see chart for upcharge

#### ③ Access Hatches:

- C** No Access Hatches
- S** Access Hatches, add **\$140.00** list

- Leg color\*.

- Universal rail/utility tray color\*.

- Access hatch color\* (if applicable).


**\*Note:** Upcharge for mixed grade trim surfaces; refer to the electronic design and specification tools for pricing.

#### ② Power Type


Width	3-Circuit	4-Circuit, 2+2	4-Circuit, 3+1	Hardwire
48"	\$114.40	\$114.40	\$114.40	\$275.18
54"	119.60	119.60	119.60	284.54
60"	124.80	124.80	124.80	293.90
66"	130.00	130.00	130.00	303.26
72"	135.20	135.20	135.20	312.62

## Double Sided Kits

## Double Sided Starter Kit



Straight Leg  
ZBRA-4848-SIGH



Angled Leg  
ZBRA-4848-SAGH  
(Shown with Utility Tray, 3- or 4-circuit  
power and access hatches)

Depth	Width	Number	①	②	③	Trim A	B
<b>No Utility Tray</b>							
48"(1219mm)	48"(1219mm)	ZBRA-4848-S	GHPNN			\$642.08	\$672.24
	54"(1372mm)	ZBRA-4854-S	GHPNN			652.48	682.64
	60"(1524mm)	ZBRA-4860-S	GHPNN			662.88	693.04
	66"(1676mm)	ZBRA-4866-S	GHPNN			673.28	703.44
	72"(1829mm)	ZBRA-4872-S	GHPNN			683.68	713.84
60"(1524mm)	48"(1219mm)	ZBRA-6048-S	GHPNN			\$673.28	\$703.44
	54"(1372mm)	ZBRA-6054-S	GHPNN			683.68	713.84
	60"(1524mm)	ZBRA-6060-S	GHPNN			694.08	724.24
	66"(1676mm)	ZBRA-6066-S	GHPNN			704.48	734.64
	72"(1829mm)	ZBRA-6072-S	GHPNN			714.88	745.04
<b>Utility Tray</b>							
48"(1219mm)	48"(1219mm)	ZBRA-4848-S	GHP	T		\$777.28	\$807.44
	54"(1372mm)	ZBRA-4854-S	GHP	T		798.08	828.24
	60"(1524mm)	ZBRA-4860-S	GHP	T		818.88	849.04
	66"(1676mm)	ZBRA-4866-S	GHP	T		839.68	869.84
	72"(1829mm)	ZBRA-4872-S	GHP	T		860.48	890.64
60"(1524mm)	48"(1219mm)	ZBRA-6048-S	GHP	T		\$808.48	\$838.64
	54"(1372mm)	ZBRA-6054-S	GHP	T		829.28	859.44
	60"(1524mm)	ZBRA-6060-S	GHP	T		850.08	880.24
	66"(1676mm)	ZBRA-6066-S	GHP	T		870.88	901.04
	72"(1829mm)	ZBRA-6072-S	GHP	T		891.68	921.84

## Features

- Includes two fixed-height leg assemblies, two support beams, rail, and surface support brackets.
- Available with or without the following:
  - Power distribution assembly
  - Below-surface utility tray; standard in charcoal
  - Full-width access hatches for back edge of worksurfaces
- Fixed-height legs are 28"(711mm) to bottom of worksurface with glides fully recessed.
- Glides provide 1/2"(13mm) leveling adjustment.
- Leg accent plate is located in the top center section of each leg assembly and allows for a user-specified accent color for aesthetic purposes.
- Power distribution assembly provides locations for four separately specified triplex receptacles (2 on each side), providing below-surface power access at the back edge of each worksurface.
- Access hatch option includes four hinged doors (two on each side) that extend the full width of the surfaces for easy access to power distribution assembly and utility tray. The doors are 4 1/4"(108mm) deep and provide a 1"(25mm) gap between the hatch and worksurface.
- Field assembled.

## Specification Tips

- For **in-line** benching applications only; not for return benching applications.
- Requires Double Sided Add-On Kit(s) for an in-line double sided benching application. Leg from the Double Sided Starter Kit is repositioned to the end-of-run.
- For use with Intuity worksurfaces, specified separately.
  - Kit with no access hatches, option (-C) supports rectangular worksurfaces.
  - Kit with access hatches, option (-S) supports rectangular worksurfaces for use with access hatches.
- Angled Legs are required for Knife Edge worksurface option.
- Rail features an inset channel for use with Intuity Screens and Active Components Center Screens.
- Below worksurface utility tray is optional for a non-powered application. Recommended if below worksurface cable management is needed.
- Below worksurface power access is standard with -3, -4 circuit or hardwire power option.
- In 3- and 4-circuit power applications the Power Distribution Assembly (PDA) will accept a maximum of four separately specified triplex receptacles; two per each side of Double Sided Starter Kit.
- Hardwire power option (-C) includes two junction boxes; conduit is field supplied.
- Separately specify electrical components for **in** and **out** power path. Do not mix 3-circuit with 4-circuit components. Do not mix 2+2 and 3+1 components.

## To Order, Specify:

- 1) Product number, including:

## ① Leg Type:

- I** Straight Leg  
**A** Angled Leg

## ② Power Type:

- N** Non-Powered  
**3** 3-Circuit, see chart for upcharge  
**2** 4-Circuit, 2+2, see chart for upcharge  
**4** 4-Circuit, 3+1, see chart for upcharge  
**C** Hardwire, see chart for upcharge

## ③ Access Hatches:

- C** No Access Hatches  
**S** Access Hatches, add **\$280.00** list

- 2) Leg color\*.

- 3) Accent plate color\*.

- 4) Universal rail color\*.

- 5) Access hatch color\* (if applicable).


**\*Note:** Upcharge for mixed grade trim surfaces; refer to the electronic design and specification tools for pricing.

## ② Power Type for Utility Tray


Width	3-Circuit	4-Circuit, 2+2	4-Circuit, 3+1	Hardwire
48"	\$152.88	\$152.88	\$152.88	\$275.18
54"	158.08	158.08	158.08	284.54
60"	163.28	163.28	163.28	293.90
66"	168.48	168.48	168.48	303.26
72"	173.68	173.68	173.68	312.62

# Double Sided Kits


## Double Sided Add-On Kit



Straight Leg  
ZBRA-4848-ATGH



Angled Leg  
ZBRA-4848-ASGH



Column Leg  
ZBRA-4848-AFGH  
(Shown with Utility Tray, 3- or 4-circuit  
power and access hatches)

Depth	Width	Number	①	②	③	Trim A	B
<b>No Utility Tray</b>							
48"(1219mm)	48"(1219mm)	ZBRA-4848-A	GHNNN			\$486.08	\$511.04
	54"(1372mm)	ZBRA-4854-A	GHNNN			496.48	521.44
	60"(1524mm)	ZBRA-4860-A	GHNNN			506.88	531.84
	66"(1676mm)	ZBRA-4866-A	GHNNN			517.28	542.24
	72"(1829mm)	ZBRA-4872-A	GHNNN			527.68	552.64
60"(1524mm)	48"(1219mm)	ZBRA-6048-A	GHNNN			\$506.88	\$531.84
	54"(1372mm)	ZBRA-6054-A	GHNNN			517.28	542.24
	60"(1524mm)	ZBRA-6060-A	GHNNN			527.68	552.64
	66"(1676mm)	ZBRA-6066-A	GHNNN			538.08	563.04
	72"(1829mm)	ZBRA-6072-A	GHNNN			548.48	573.44
<b>Utility Tray</b>							
48"(1219mm)	48"(1219mm)	ZBRA-4848-A	GHN	T		\$621.28	\$646.24
	54"(1372mm)	ZBRA-4854-A	GHN	T		642.08	667.04
	60"(1524mm)	ZBRA-4860-A	GHN	T		662.88	687.84
	66"(1676mm)	ZBRA-4866-A	GHN	T		683.68	708.64
	72"(1829mm)	ZBRA-4872-A	GHN	T		704.48	729.44
60"(1524mm)	48"(1219mm)	ZBRA-6048-A	GHN	T		\$642.08	\$667.04
	54"(1372mm)	ZBRA-6054-A	GHN	T		662.88	687.84
	60"(1524mm)	ZBRA-6060-A	GHN	T		683.68	708.64
	66"(1676mm)	ZBRA-6066-A	GHN	T		704.48	729.44
	72"(1829mm)	ZBRA-6072-A	GHN	T		725.28	750.24

### Features

- Includes one shared, fixed-height leg assembly or column, two support beams, rail, and surface support brackets. Available with or without the following:
  - Power distribution assembly and power jumper
  - Below-surface utility tray; standard in charcoal
  - Full-width access hatches for back edge of worksurfaces
- Attaches to a Double Sided Starter Kit, or to another add-on rail to extend the overall length of the bench.
- Fixed-height legs are 28"(711mm) to bottom of worksurface with glides fully recessed.
- Glides provide 1/2"(13mm) leveling adjustment.
- Column leg option provides an enclosed cavity and removable cover for routing power up from the floor.
- Power distribution assembly provides locations for four separately specified triplex receptacles (two on each side), providing below-surface power access at the back edge of each worksurface.
- A power jumper is included to connect adjacent power distribution assemblies.
- Access hatch option includes four hinged doors (two on each side) that extend the full width of the surfaces for easy access to power distribution assembly and utility tray. The doors are 4 1/4"(108mm) deep and provide a 1"(25mm) gap between the hatch and worksurface.
- Field assembled.

### Specification Tips

- For **in-line** benching applications only; not for return benching applications.
- Requires Double Sided Starter Kit for an in-line double sided benching application. Leg from the Double Sided Starter Kit is repositioned to end of run.
- Multiple Double Sided Add-On Kits may be used with one Double Sided Starter Kit.
- For use with Intuity worksurfaces, specified separately.
  - Kit with no access hatches, option (-C) supports rectangular worksurfaces.
  - Kit with access hatches, option (-S) supports rectangular worksurfaces for use with access hatches.
- Angled Legs are required for Knife Edge worksurface option.
- Column Leg provides intermediate shared support, additional knee clearance, and power and cable management.
- Rail features an inset channel for use with Intuity Screens and Active Components Center Screens.
- Below worksurface utility tray is optional for a non-powered application. Recommended if below worksurface cable management is needed.
- Below worksurface power access is standard with -3, -4 circuit or hardwire power option.

### Specifications Tips, continued:

- In 3- and 4- circuit power applications the Power Distribution Assembly (PDA) will accept a maximum of four separately specified triplex receptacles; two per each side of Double Sided Starter Kit.
- Hardwire power option (-C) includes two junction boxes; conduit is field supplied.
- Separately specify electrical components for in and out power path. Do not mix 3-circuit with 4-circuit components. Do not mix 2+2 and 3+1 components.

### To Order, Specify:

- Product number, including:

#### ① Leg Type:

- T** Straight Leg
- S** Angled Leg
- F** Column Leg, add **\$233.00** list

#### ② Power Type:

- N** Non-Powered
- 3** 3-Circuit, see chart for upcharge
- 2** 4-Circuit, 2+2, see chart for upcharge
- 4** 4-Circuit, 3+1, see chart for upcharge
- C** Hardwire, see chart for upcharge

#### ③ Access Hatches:

- C** No Access Hatches
- S** Access Hatches, add **\$280.00** list

- Leg color\*.
- Universal rail color\*.
- Access hatch color\* (if applicable).


**\*Note:** Upcharge for mixed grade trim surfaces; refer to the electronic design and specification tools for pricing.

#### ② Power Type for Utility Tray


Width	3-Circuit	4-Circuit, 2+2	4-Circuit, 3+1	Hardwire
48"	\$152.88	\$152.88	\$152.88	\$275.18
54"	158.08	158.08	158.08	284.54
60"	163.28	163.28	163.28	293.90
66"	168.48	168.48	168.48	303.26
72"	173.68	173.68	173.68	312.62

# 120° Single Sided Starter Kits

## 120° Single Sided Starter Kit



ZBCZ-2442-SIGH



ZBCZ-2442-SAGH

Depth	Width	Number	①	②	Trim A	B
24"(610mm)	42"(1067mm)	ZBCZ-2442-S	GHP	TC	\$1643.88	\$1661.56
	48"(1219mm)	ZBCZ-2448-S	GHP	TC	1724.28	1741.96
	54"(1372mm)	ZBCZ-2454-S	GHP	TC	1804.68	1822.36
30"(762mm)	42"(1067mm)	ZBCZ-3042-S	GHP	TC	\$1883.88	\$1901.56
	48"(1219mm)	ZBCZ-3048-S	GHP	TC	1964.28	1981.96
	54"(1372mm)	ZBCZ-3054-S	GHP	TC	2044.68	2062.36

### Features

- Includes two fixed-height leg assemblies, two support beams, one center post leg, two rails, worksurface support brackets, integrated below surface utility tray and 120° single corner cap.
- Available with or without the following:
  - Power Distribution Assemblies (2) and Flex Connector (1).
- Fixed height legs are 28"(711mm) to bottom of worksurface with glides fully recessed.
- Glides provide 1/2"(13mm) leveling adjustment.
- Leg accent plate is located in the top center section of each leg assembly and allows for a user-specified accent color for aesthetic purposes.
- Field assembled.

### Specification Tips

- May be used as a stand alone desk.
- Requires Single Sided Add-On Kit(s) for an in-line single sided benching application. Leg from the 120° Single Sided Starter Kit is repositioned to the end-of-run.
- Not for use in a return benching position.
- For use with Intuity 120° worksurface; specified separately.
- Access Hatch not available on 120° kits.
- Angled legs required for knife edge worksurface option.
- Rail features an inset channel for use with Intuity Screens or Active Components Center Screens.
- 120° Single Sided Kit is always standard with utility tray in a powered or non-powered application.
- 3-circuit, 4-circuit or hardwire power options are standard with below worksurface power access location.
- In 3- and 4-circuit power applications the Power Distribution Assembly (PDA) will accept a maximum of four separately specified triplex receptacles.
- Hardwire power option (-C) includes four junction boxes; conduit is field supplied.
- Separately specify electrical components for in and out power path.
- Do not mix 3-circuit with 4-circuit components. Do not mix 2+2 and 3+1 components. Components have unique polarity key and color coding (3-circuit=black, 2+2=blue and 3+1=green).

### To Order, Specify:

- Product number, including:

#### ① Leg Type:

- I** Straight Leg
- A** Angled Leg

#### ② Power Type:

- N** Non-Powered
- 3** 3-Circuit, see chart for upcharge
- 2** 4-Circuit 2+2, see chart for upcharge
- 4** 4-Circuit, 3+1, see chart for upcharge
- C** Hardwire, see chart for upcharge

- Leg color\*.
- Accent plate color\*.
- Universal rail/utility tray/120° single corner cap color\*.


**\*Note:** Upcharge for mixed grade trim surfaces; refer to the electronic design and specification tools for pricing.

#### ② Power Type


Width	3-Circuit	4-Circuit, 2+2	4-Circuit, 3+1	Hardwire
42"	\$143.00	\$143.00	\$143.00	\$343.98
48"	153.40	153.40	153.40	362.70
54"	163.80	163.80	163.80	381.42

# 120° Double Sided Three Pack Starter Kit

## 120° Double Sided Three Pack Starter Kit



ZBCZ-4842-SIGH



ZBCZ-4842-SAGH

Depth	Width	Number	①	②	Trim A	B
<b>No Utility Tray – Non-Powered</b>						
48"(1219mm)	42"(1067mm)	ZBCZ-4842-S	GHP	NCC	\$2303.08	\$2320.76
	48"(1219mm)	ZBCZ-4848-S	GHP	NCC	2373.08	2390.76
	54"(1372mm)	ZBCZ-4854-S	GHP	NCC	2443.08	2460.76
60"(1524mm)	42"(1067mm)	ZBCZ-6042-S	GHP	NCC	\$2783.08	\$2800.76
	48"(1219mm)	ZBCZ-6048-S	GHP	NCC	2853.08	2870.76
	54"(1372mm)	ZBCZ-6054-S	GHP	NCC	2923.08	2940.76
<b>Utility Tray</b>						
48"(1219mm)	42"(1067mm)	ZBCZ-4842-S	GHP	TC	\$2523.48	\$2541.16
	48"(1219mm)	ZBCZ-4848-S	GHP	TC	2624.68	2642.36
	54"(1372mm)	ZBCZ-4854-S	GHP	TC	2725.88	2743.56
60"(1524mm)	42"(1067mm)	ZBCZ-6042-S	GHP	TC	\$3003.48	\$3021.16
	48"(1219mm)	ZBCZ-6048-S	GHP	TC	3104.68	3122.36
	54"(1372mm)	ZBCZ-6054-S	GHP	TC	3205.88	3223.56

### Features

- Includes three fixed-height leg assemblies, three center post legs, six support beams, three rails, worksurface support brackets and 120° three-way cap.
- Available with or without the following:
  - Power Distribution Assemblies (3) and Flex Connectors (2).
  - Below-surface utility tray; standard in charcoal. Powered application always includes utility tray. Optional for non-powered application only.
- Fixed height legs are 28"(711mm) to bottom of worksurface with glides fully recessed.
- Glides provide 1/2"(13mm) leveling adjustment.
- Leg accent plate is located in the top center section of each leg assembly and allows for a user-specified accent color for aesthetic purposes.
- Field assembled.

### Specification Tips

- For 120° applications.**
  - May be used in the following applications:
    - Stand alone desk
    - With Double Sided Add-On Kit
    - With Double Sided 120° add-on kit
- Requires three separately specified 120° Intuity worksurfaces:
  - 48"(1219mm) deep kit require 24"(610mm) deep worksurfaces
  - 60"(1524mm) deep kit require 30"(762mm) deep worksurfaces
- Access Hatch not available on 120° kits.
- Angled legs are required for Knife Edge worksurface option.
- Rail features an inset channel for use with Intuity Screens and Active Components Center Screens.
- Below worksurface utility tray is optional for a non-powered application but recommended if below worksurface cable management is needed.
- Below worksurface utility tray is standard for 3-circuit, 4-circuit and hardwire options.
- 3- and 4-circuit or hardwire power options are standard with below worksurface power access location.
- In 3- and 4-circuit power applications the Power Distribution Assemblies (PDA) will accept a maximum of twelve separately specified triplex receptacles.
- Hardwire power option (-C) includes six junction boxes; conduit is field supplied.
- Separately specify electrical components for in and out power path.
- Do not mix 3-circuit with 4-circuit components. Do not mix 2+2 and 3+1 components. Components have unique polarity key and color coding (3-circuit=black, 2+2=blue and 3+1=green).

### To Order, Specify:

- Product number, including:

#### ① Leg Type:

- I** Straight Leg
- A** Angled Leg

#### ② Power Type:

- N** Non-Powered
- 3** 3-Circuit, see chart for upcharge
- 2** 4-Circuit 2+2, see chart for upcharge
- 4** 4-Circuit, 3+1, see chart for upcharge
- C** Hardwire, see chart for upcharge

- Leg color\*.

- Accent plate color\*.

- Universal rail/utility tray/120° three-way cap color\*.

**\*Note:** Upcharge for mixed grade trim surfaces; refer to the electronic design and specification tools for pricing.


#### ② Power Type

Width	3-Circuit	4-Circuit, 2+2	4-Circuit, 3+1	Hardwire
42"	\$458.64	\$458.64	\$458.64	\$945.54
48"	469.04	469.04	469.04	964.26
54"	479.44	479.44	479.44	982.98




# 120° Double Sided Three Pack Add-on Kit


## 120° Double Sided Three Pack Add-on Kit




ZBCZ-4842-AWGH



ZBCZ-4842-AYGH



ZBCZ-4842-AXGH



ZBCZ-4842-AZGH

Depth	Width	Number	①	②	Trim A	B
<b>No Utility Tray – Non-Powered</b>						
48"(1219mm)	42"(1067mm)	ZBCZ-4842-A	GHP	NNC	\$1921.68	\$1934.16
	48"(1219mm)	ZBCZ-4848-A	GHP	NNC	1991.68	2004.16
	54"(1372mm)	ZBCZ-4854-A	GHP	NNC	2061.68	2074.16
60"(1524mm)	42"(1067mm)	ZBCZ-6042-A	GHP	NNC	\$2401.68	\$2414.16
	48"(1219mm)	ZBCZ-6048-A	GHP	NNC	2471.68	2484.16
	54"(1372mm)	ZBCZ-6054-A	GHP	NNC	2541.68	2554.16
<b>Utility Tray</b>						
48"(1219mm)	42"(1067mm)	ZBCZ-4842-A	GHP	TC	\$2142.08	\$2154.56
	48"(1219mm)	ZBCZ-4848-A	GHP	TC	2243.28	2255.76
	54"(1372mm)	ZBCZ-4854-A	GHP	TC	2344.48	2356.96
60"(1524mm)	42"(1067mm)	ZBCZ-6042-A	GHP	TC	\$2622.08	\$2634.56
	48"(1219mm)	ZBCZ-6048-A	GHP	TC	2723.28	2735.76
	54"(1372mm)	ZBCZ-6054-A	GHP	TC	2824.48	2836.96

### Features

- Includes one fixed-height leg kit, three center post legs, six support beams, three rails, worksurface support brackets and 120° three way cap.
- Fixed height leg kit includes legs for one shared condition and one end-of-run condition.
- Available with or without the following:
  - Power Distribution Assemblies (3) and Flex Connectors (3).
  - Below-surface utility tray; standard in charcoal. Powered application always includes utility tray. Optional for non-powered application only.
- Fixed height legs are 28"(711mm) to bottom of worksurface with glides fully recessed.
- Glides provide 1/2"(13mm) leveling adjustment.
- Column leg option provides an enclosed cavity and removable cover for routing power up from the floor.
- A power jumper is included to connect to adjacent power distribution assembly.
- Field assembled.

### Specification Tips

- For 120° applications.**
  - Not for stand alone applications
  - Must be used with additional kits.
- Requires Double Sided Starter Kit for benching application. Leg from Double Sided Starter Kit is repositioned to end-of-run.
- Requires three separately specified 120° Intuity worksurfaces:
  - 48"(1219mm) deep kit require 24"(610mm) deep worksurfaces
  - 60"(1524mm) deep kit require 30"(762mm) deep worksurfaces
- Access Hatch not available on 120° kits.
- Angled legs are required for Knife Edge worksurface option.
- Column leg provides intermediate shared support, additional knee clearance, and power and cable management.
- Rail features an inset channel for use with Intuity Screens and Active Components Center Screens.
- Below worksurface utility tray is optional for a non-powered application but recommended if below worksurface cable management is needed.
- Below worksurface utility tray is standard for 3-circuit, 4-circuit and hardwire options.
- 3-circuit, 4-circuit or hardwire power options are standard with below worksurface power access location.
- In 3- and 4-circuit power applications the Power Distribution Assemblies (PDA) will accept a maximum of twelve separately specified triplex receptacles; two per each side of the 120° Double Sided Starter Kit.
- Hardwire power option (-C) includes six junction boxes; conduit is field supplied.
- Separately specify electrical components for in and out power path.
- Do not mix 3-circuit with 4-circuit components. Do not mix 2+2 and 3+1 components. Components have unique polarity key and color coding (3-circuit=black, 2+2=blue and 3+1=green).

### To Order, Specify:

- Product number, including:

#### ① Leg Kit:

- W** Shared Straight Leg and Straight Leg
- Y** Shared Angled Leg and Angled Leg
- X** Column Leg and Straight Leg, add **\$208.00** list
- Z** Column Leg and Angled Leg, add **\$208.00** list

#### ② Power Type:

- N** Non-Powered
- 3** 3-Circuit, see chart for upcharge
- 2** 4-Circuit 2+2, see chart for upcharge
- 4** 4-Circuit, 3+1, see chart for upcharge
- C** Hardwire, see chart for upcharge

- Leg color\*.
- Accent plate color\*.
- Universal rail/utility tray/120° three-way cap color\*.


**\*Note:** Upcharge for mixed grade trim surfaces; refer to the electronic design and specification tools for pricing.

#### ② Power Type


Width	3-Circuit	4-Circuit, 2+2	4-Circuit, 3+1	Hardwire
42"	\$458.64	\$458.64	\$458.64	\$945.54
48"	469.04	469.04	469.04	964.26
54"	479.44	479.44	479.44	982.98

# Leg Kits

	Description	Number	Trim	
			A	B
<b>Bench End Leg Kit</b>	Straight Leg	ZBE2-0000-PNFG	\$416.00	\$428.48
	Angled Leg	ZBA2-0000-PNFG	416.00	428.48



ZBE2-0000-PNFG



ZBA2-0000-PNFG

## Features

- Includes two fixed-height steel legs, brackets, and attachment hardware.
- Legs are 28"(711mm) to bottom of worksurface with glides fully recessed.
- Glides provide 1/2"(13mm) leveling adjustment.
- Field assembled.


## To Order, Specify:

- 1) Product number.
- 2) Trim color.


## Specification Tip

- Legs allow a bench end surface to be attached at the end of a double sided bench run.

## Return Leg Kit



ZBI2-0030-HNFG



ZBA2-0024-HRFG

Depth	Orientation	Number	Trim	
			A	B
Straight Leg				
24"(610mm)	Non-Handed	ZBI2-0024-HNFG	\$270.40	\$293.28
30"(762mm)	Non-Handed	ZBI2-0030-HNFG	312.00	334.88
Angled Leg				
24"(610mm)	Left-Hand	ZBA2-0024-HLFG	\$270.40	\$293.28
	Right-Hand	ZBA2-0024-HRFG	270.40	293.28
30"(762mm)	Left-Hand	ZBA2-0030-HLFG	\$312.00	\$334.88
	Right-Hand	ZBA2-0030-HRFG	312.00	334.88

## Features

- Includes one fixed-height leg assembly, brackets, and attachment hardware.
- Leg is 28"(711mm) to bottom of worksurface with glides fully recessed.
- Glides provide 1/2"(13mm) leveling adjustment.
- Field assembled.

## To Order, Specify:

- 1) Product number.
- 2) Leg color\*.
- 3) Accent plate color\*.

**\*Note:** Upcharge for mixed grade trim surfaces; refer to the electronic design and specification tools for pricing.


## Specification Tip

- Allows a return worksurface to be attached to the front edge of a rectangular worksurface to create a return.

# Worksurfaces

## Rectangular Worksurface

Depth	Width	Number ①②	Laminate Grade A		Laminate Grade B		Wood Group A		Wood Group B	
			Edgeband	Knife	Edgeband	Knife	Edgeband	Knife	Edgeband	Knife
24"(610mm)	48"(1219mm)	WBRA-2448 SC	\$167.28	\$267.69	\$178.93	\$279.34	\$489.63	\$613.23	\$551.99	\$692.23
	54"(1372mm)	WBRA-2454 SC	181.98	287.55	194.83	300.40	519.15	648.99	586.73	726.97
	60"(1524mm)	WBRA-2460 SC	196.68	307.41	210.73	321.46	548.67	684.75	621.47	761.71
	66"(1676mm)	WBRA-2466 SC	211.38	327.27	226.63	342.52	578.19	720.51	656.21	796.45
	72"(1829mm)	WBRA-2472 SC	226.08	347.13	242.53	363.58	607.71	756.27	690.95	831.19
30"(762mm)	48"(1219mm)	WBRA-3048 SC	\$199.32	\$299.73	\$213.49	\$313.90	\$553.65	\$677.25	\$627.35	\$767.59
	54"(1372mm)	WBRA-3054 SC	214.02	319.59	229.39	334.96	583.17	713.01	662.09	802.33
	60"(1524mm)	WBRA-3060 SC	228.72	339.45	245.29	356.02	612.69	748.77	696.83	837.07
	66"(1676mm)	WBRA-3066 SC	243.42	359.31	261.19	377.08	642.21	784.53	731.57	871.81
	72"(1829mm)	WBRA-3072 SC	258.12	379.17	277.09	398.14	671.73	820.29	766.31	906.55



WBRA-SC

### Features

- Includes 1 3/16"(30mm) thick laminate or wood worksurface and attachment hardware.
- Available with edgeband or knife edge.
  - Edgeband worksurface has 3mm edgeband on user edge, 1mm edgeband on sides and back.
  - Knife edge worksurface has knife edge on user edge, 1mm edgeband on sides and back.

### Specification Tips

- For **in-line** benching applications only; not for return benching applications.
- For use with starter kit or add-on kit with no access hatches, option (-C).
- When attached to starter or add-on kit, worksurface has a 1"(25mm) gap between the back edge of the surface and the rail.
- In double sided applications, there is a total of 3.64"(92mm) between the back edges of the surfaces (includes depth of rail and gap between rail and worksurfaces).
- May not be supported by attached lower storage.
- Angled Legs are required for Knife Edge worksurface option.
- X Series 23"(584mm) deep, box/file, mobile pedestal will not fully nest beneath a 24"(610mm) deep worksurface with a Utility Tray.
- Only for use with Active Components attached storage. See Active Components Price List.
- May be used with Belong Work Tools and Accessories, Adjustable Keyboard Pads and Monitor Arms.

### To Order, Specify:

- Product number, including:

#### ① Top Option:

- L** Laminate
- W** Wood

#### ② Edge Option:

Laminate:

- J** Edgeband
- F** Knife

Wood:


- K** Edgeband
- U** Knife

- Laminate or Wood finish color.
- Edge trim color (laminate only).

## Worksurfaces

Rectangular Worksurface – For Use with Access Hatches

Actual Depth	Nominal Depth	Width	Number	①	②	Laminate Grade A Edgeband	Knife	Laminate Grade B Edgeband	Knife	Wood Group A Edgeband	Knife	Wood Group B Edgeband	Knife
20"(508mm)	24"(610mm)	48"(1219mm)	WBRA-2448		SS	\$167.28	\$267.69	\$178.93	\$279.34	\$489.63	\$613.23	\$551.99	\$692.23
		54"(1372mm)	WBRA-2454		SS	181.98	287.55	194.83	300.40	519.15	648.99	586.73	726.97
		60"(1524mm)	WBRA-2460		SS	196.68	307.41	210.73	321.46	548.67	684.75	621.47	761.71
		66"(1676mm)	WBRA-2466		SS	211.38	327.27	226.63	342.52	578.19	720.51	656.21	796.45
		72"(1829mm)	WBRA-2472		SS	226.08	347.13	242.53	363.58	607.71	756.27	690.95	831.19
26"(660mm)	30"(762mm)	48"(1219mm)	WBRA-3048		SS	\$199.32	\$299.73	\$213.49	\$313.90	\$553.65	\$677.25	\$627.35	\$767.59
		54"(1372mm)	WBRA-3054		SS	214.02	319.59	229.39	334.96	583.17	713.01	662.09	802.33
		60"(1524mm)	WBRA-3060		SS	228.72	339.45	245.29	356.02	612.69	748.77	696.83	837.07
		66"(1676mm)	WBRA-3066		SS	243.42	359.31	261.19	377.08	642.21	784.53	731.57	871.81
		72"(1829mm)	WBRA-3072		SS	258.12	379.17	277.09	398.14	671.73	820.29	766.31	906.55



### Features

- Includes 1 3/16"(30mm) thick laminate or wood worksurface and attachment hardware.
- Available with edgeband or knife edge.
  - Edgeband worksurface has 3mm edgeband on user edge, 1mm edgeband on sides and back.
  - Knife edge worksurface has knife edge on user edge, 1mm edgeband on sides and back.
- For use on Starter Kits and Add-On Kits specified with access hatches.

### Specification Tips

- For **in-line** benching applications only; not for return benching applications.
- For use with Starter Kit or Add-On Kit with access hatches, option (-S).
- Access hatches at the back of the worksurface are factory-installed with Starter Kit or Add-On Kit.
- 24"(610mm) deep worksurface provides 20"(508mm) of depth from the front edge to the access hatches.
- 30"(762mm) deep worksurface provides 26"(660mm) of depth from the front edge to the access hatches.
- Gap between back edge of worksurface and access hatches is 1"(25mm).
- May not be supported by attached lower storage.
- Angled Legs are required for Knife Edge worksurface option.
- X series 23"(584mm) deep, box/file, mobile pedestal will not fully nest beneath a 24"(610mm) deep worksurface with a Utility Tray.
- Only for use with Active Components attached storage. See Active Components Price List.
- May be used with most Belong Work Tools and Accessories, Adjustable Keyboard Pads and Monitor Arms (with special clamp); refer to the appropriate price list pages for details.

### To Order, Specify:

1) Product number, including:

#### ① Top Option:

**L** Laminate

**W** Wood

#### ② Edge Option:

Laminate:

**J** Edgeband

**F** Knife

Wood:

**K** Edgeband

**U** Knife


2) Laminate or Wood finish color.

3) Edge trim color (laminate only).

# Worksurfaces

## Rectangular Bench End Worksurface

Depth	Width	Number ① ②	Laminate Grade A		Laminate Grade B		Wood Group A		Wood Group B	
			Edgeband	Knife	Edgeband	Knife	Edgeband	Knife	Edgeband	Knife
51"(1295mm)	24"(610mm)	WBDA-5124- SC	\$179.76	\$280.17	\$191.41	\$291.82	\$502.11	\$625.71	\$564.47	\$704.71
	30"(762mm)	WBDA-5130- SC	194.46	294.87	207.31	307.72	531.63	655.23	599.21	739.45
63"(1600mm)	24"(610mm)	WBDA-6324- SC	\$221.28	\$321.69	\$236.29	\$336.70	\$630.15	\$753.75	\$715.19	\$855.43
	30"(762mm)	WBDA-6330- SC	235.98	336.39	252.19	352.60	659.67	783.27	749.93	890.17



WBDA-SC

### Features

- Includes 1 3/16"(30mm) thick laminate or wood worksurface.
- Available with edgeband or knife edge.
  - Edgeband worksurface has 3mm edgeband on user edge and sides, 1mm edgeband on back.
  - Knife edge worksurface has knife edge on user edge and sides, 1mm edgeband on back.
- Attaches at the end of a double-sided bench using bench end legs, specified separately.

### Specification Tips

- 51"(1295mm) deep worksurface attaches to 48"(1219mm) deep double sided bench.
- 63"(1600mm) deep worksurface attaches to 60" deep double sided bench.
- Worksurface is not available with access hatches and is non-powered.
- Worksurface is not available with a rail and does not accept an Intuity screen.

### To Order, Specify:

- Product number, including:

#### ① Top Option:

- L** Laminate
- W** Wood

#### ② Edge Option:

Laminate:

- J** Edgeband
- F** Knife

Wood:


- K** Edgeband
- U** Knife

- Laminate or Wood finish color.
- Edge trim color (laminate only).

# Worksurfaces

## Rectangular Return Worksurface

Depth	Width	Number ① ②			Laminate Grade A		Laminate Grade B		Wood Group A		Wood Group B	
					Edgeband	Knife	Edgeband	Knife	Edgeband	Knife	Edgeband	Knife
24"(610mm)	48"(1219mm)	WBRB-2448-	SC		\$128.96	\$251.52	\$231.92	\$354.48	\$280.80	\$404.40	\$309.92	\$433.52
	54"(1372mm)	WBRB-2454-	SC		142.48	267.12	246.52	371.16	295.36	426.24	327.07	457.95
	60"(1524mm)	WBRB-2460-	SC		156.00	282.72	261.12	387.84	309.92	448.08	344.22	482.38
30"(762mm)	48"(1219mm)	WBRB-3048-	SC		\$146.64	\$269.20	\$251.01	\$373.57	\$329.68	\$453.28	\$367.50	\$491.10
	54"(1372mm)	WBRB-3054-	SC		160.16	284.80	265.61	390.25	344.24	475.12	384.65	515.53
	60"(1524mm)	WBRB-3060-	SC		173.68	300.40	280.21	406.93	358.80	496.96	401.80	539.96



WBRB-SC

### Features

- Includes 1 3/16"(30mm) thick laminate or wood rectangular worksurface.
- Available with edgeband or knife edge.
  - Edgeband worksurface has 3mm edgeband on user edge, 1mm edgeband on sides and back.
  - Knife edge worksurface has knife edge on user edge, 1mm edgeband on sides and back.
- Attaches along the front of a benching surface using return leg kit, specified separately.

### Specification Tips

- Worksurface is not available with access hatches and is non-powered.
- Worksurface is not available with a rail and does not accept an Intuity screen.
- Specify surface depth to match return leg depth.
- Knife edge return has square edges on sides; when used with a knife edge benching surface, edge profile of return will not match front edge of benching surface. To avoid a gap in edge profiles, specify benching surface with edgeband.

### To Order, Specify:

- Product number, including:

#### ① Top Option:

- L** Laminate
- W** Wood

#### ② Edge Option:

Laminate:

- J** Edgeband
- F** Knife

Wood:

- K** Edgeband
- U** Knife



- Laminate or Wood finish color.
- Edge trim color (laminate only).



# Worksurfaces

Corner, 120° Wrap-Around

Left/Right Depth	Width	Number	①	②	③	Laminate Grade A Edgeband	Knife	Laminate Grade B Edgeband	Knife	Wood Group A Edgeband	Knife	Wood Group B Edgeband	Knife
24"(610mm)	42"(1067mm)	WBCZ-4242-		S	N44	\$312.00	\$512.38	\$320.48	\$520.86	\$ 964.00	\$1459.00	\$1121.53	\$1616.53
	48"(1219mm)	WBCZ-4848-		S	N44	358.50	572.62	369.02	583.14	1069.00	1624.00	1245.22	1800.22
	54"(1372mm)	WBCZ-5454-		S	N44	405.00	632.86	417.56	645.42	1174.00	1789.00	1368.91	1983.91
30"(762mm)	42"(1067mm)	WBCZ-4242-		S	N55	\$324.50	\$539.88	\$333.98	\$549.36	\$1064.00	\$1559.00	\$1239.33	\$1734.33
	48"(1219mm)	WBCZ-4848-		S	N55	371.00	600.12	382.52	611.64	1169.00	1724.00	1363.02	1918.02
	54"(1372mm)	WBCZ-5454-		S	N55	417.50	660.36	431.06	673.92	1274.00	1889.00	1486.71	2101.71

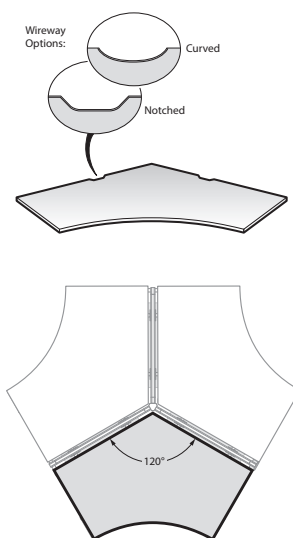

WBCZ-S

## Features

- Includes 1 3/16"(30mm) thick laminate or wood worksurface and tie plate.
- Available with edgeband or knife edge.
- Edgeband worksurface has 3mm edgeband on the user edge, 1mm edgeband on sides and back.
- Knife edge worksurface has knife edge on user edge, 1mm edgeband and on sides and back.
- Optional wireway along back edges of worksurface is color-matched to solid side/back edge trim. When wood grain edge trim is specified, wireway will be charcoal. Refer to Specification Guide for wireway details.
- Depths and widths shown in nominal dimensions.

## Specification Tips

- For 120° single or three-pack applications; not for return benching applications.
- When attached to a starter or add-on kit, worksurface has a 1"(25mm) gap between the back edges of the surface and the rail.
- In double sided applications, there is a total of 3.64"(92mm) between the back edges of the surfaces (includes depth of rail and gap between rail and worksurfaces).
- May not be supported by attached lower storage.
- Angled legs are required for Knife Edge worksurface option.
- X Series 23"(584mm) deep, box/file, mobile pedestal will not fully nest beneath a 24"(610mm) deep worksurface with Utility Tray.
- Only for use with Active Components attached storage. See Active Components Price List.
- May be used with Belong Work Tools, Accessories, Adjustable Keyboard Pads and Monitor Arms.

## To Order, Specify:

- Product number, including:

### ① Top Option:

- L** Laminate
- W** Wood

### ② Edge Option:

Laminate:

- J** Edgeband
- F** Knife

Wood:





- K** Edgeband
- U** Knife

### ③ Wireway Option:

- A** Notched
- B** Curved
- C** Without

- Laminate or Wood finish color.
- Edge trim color (laminate only).

Accessories

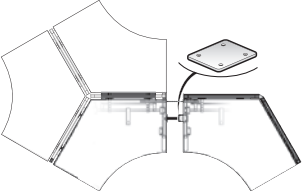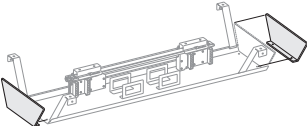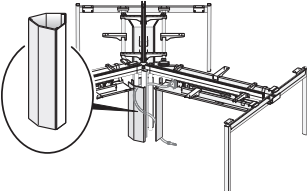	Number	Price						
<b>Tie Plate</b>  ZBBP-0000-PN	ZBBP-0000-PN	\$17.25						
<b>Features</b> <ul style="list-style-type: none"><li>Includes painted tie plate and attachment hardware.</li><li>Tie plate is used to connect a single sided kit to a double sided kit.</li><li>Required for pass-through power.</li><li>Standard in Black.</li></ul>	<b>To Order, Specify:</b> <ul style="list-style-type: none"><li>1) Product number. (No finish specification required.)</li></ul>							
<b>Screen Aligner</b>  VBSF-0000	VBSF-0000	\$35.75						
<b>Feature</b> <ul style="list-style-type: none"><li>Includes one pack of 10 clear polycarbonate clips.</li></ul>	<b>To Order, Specify:</b> <ul style="list-style-type: none"><li>1) Product number. (No finish specification required.)</li></ul>							
<b>Specification Tips</b> <ul style="list-style-type: none"><li>For use when aligning two Intuity fabric or hardsurface screens.</li><li><b>Not for use with glass screens.</b></li><li>Recommended for in-line screen condition.</li></ul>								
<b>Double-Sided Utility Tray End Covers</b>  EUEC-0000	EUEC-0000	\$65.75						
<b>Features</b> <ul style="list-style-type: none"><li>Includes two covers and hardware.</li><li>For use on double sided kits.</li><li>Standard in Black.</li></ul>	<b>To Order, Specify:</b> <ul style="list-style-type: none"><li>1) Product number. (No finish specification required.)</li></ul>							
<b>120° Infeed Cover</b>  EBEC-0000-F	<table><tr><th>Number</th><th>Trim A</th><th>B</th></tr><tr><td>EBEC-0000-F</td><td>\$130.50</td><td>\$140.50</td></tr></table>	Number	Trim A	B	EBEC-0000-F	\$130.50	\$140.50	<b>To Order, Specify:</b> <ul style="list-style-type: none"><li>1) Product number.</li><li>2) Trim color.</li></ul>
Number	Trim A	B						
EBEC-0000-F	\$130.50	\$140.50						
<b>Features</b> <ul style="list-style-type: none"><li>Includes 3-piece cover and attachment hardware.</li><li>Optional cover is used to conceal infeed for electrical application and/or cover three center post legs.</li></ul>								
<b>Specification Tip</b> <ul style="list-style-type: none"><li>Only for use with Three Pack 120° workstations.</li></ul>								

This page intentionally blank

## Screens

### Rail Mounted Screen



SUPC

#### Features

- Includes fabric, markerboard, laminate, wood, or glass screen and attachment hardware.
- Fabric screen is non-tackable.
- Markerboard, laminate, and wood screen have 1mm edgeband.

#### Specification Tips

- Not for use on end of worksurface or between in-line worksurfaces.
- Not for use with bench end worksurface or return worksurface.
- Screen width can be equal to or less than width of starter kit, add-on kit, or worksurface.
- Screen pressure-fits into rail's inset channel; the 1.50"(38mm) open channel will be visible if screens are not specified.
- Installed screen is 12.36"(314mm) above the worksurface.
- Screen is non-load bearing.
- The following products can be specified separately for markerboard screen:
  - Dry erase marker kit; includes holder, six markers and eraser (part# 7062-8001).
  - Markerboard cleaner and conditioner (part# 7031-7001).
  - Markerboard spray cleaner (part# 7031-7002).

#### To Order, Specify:

- 1) Product number.
- 2) Surface Color Options:

##### Fabric:

– Fabric Color

##### Markerboard:

– Product number

##### Laminate:

–Laminate Color

–Edgeband trim color

##### Wood:

–Wood Finish Color

##### Glass:

–Glass Finish

9T-1C Clear (Grade A)

9T-E21 Satin Etched (Grade C)

Height	Width	Number	Fabric Grade						
			A	B	C	D	E	F	G
Fabric									
12″(305mm)	24″(610mm)	SUPC-1324-FB	\$150.68	\$155.05	\$160.00	\$165.24	\$170.48	\$177.76	\$182.13
	30″(762mm)	SUPC-1330-FB	161.50	167.53	174.15	181.88	188.79	198.56	204.60
	36″(914mm)	SUPC-1336-FB	172.32	180.01	188.30	198.52	207.10	219.36	227.07
	42″(1067mm)	SUPC-1342-FB	183.14	192.49	202.45	215.16	225.41	240.16	249.54
	48″(1219mm)	SUPC-1348-FB	193.96	204.97	216.60	231.80	243.72	260.96	272.01
	54″(1372mm)	SUPC-1354-FB	204.78	217.45	230.75	248.44	262.03	281.76	294.48
	60″(1524mm)	SUPC-1360-FB	215.60	229.93	244.90	265.08	280.34	302.56	316.95
21″(533mm)	24″(610mm)	SUPC-2124-FB	\$244.28	\$262.73	\$283.52	\$305.72	\$327.76	\$358.40	\$376.85
	30″(762mm)	SUPC-2130-FB	255.10	275.21	297.67	322.36	346.07	379.20	399.32
	36″(914mm)	SUPC-2136-FB	265.92	287.69	311.82	339.00	364.38	400.00	421.79
	42″(1067mm)	SUPC-2142-FB	276.74	300.17	325.97	355.64	382.69	420.80	444.26
	48″(1219mm)	SUPC-2148-FB	287.56	312.65	340.12	372.28	401.00	441.60	466.73
	54″(1372mm)	SUPC-2154-FB	298.38	325.13	354.27	388.92	419.31	462.40	489.20
	60″(1524mm)	SUPC-2160-FB	309.20	337.61	368.42	405.56	437.62	483.20	511.67
Height	Width	Number	Price						
Markerboard									
12″(305mm)	24″(610mm)	SUPC-1324-MB	\$164.32						
	30″(762mm)	SUPC-1330-MB	172.64						
	36″(914mm)	SUPC-1336-MB	180.96						
	42″(1067mm)	SUPC-1342-MB	189.28						
	48″(1219mm)	SUPC-1348-MB	197.60						
	54″(1372mm)	SUPC-1354-MB	205.92						
	60″(1524mm)	SUPC-1360-MB	214.24						
21″(533mm)	66″(1676mm)	SUPC-1366-MB	222.56						
	72″(1829mm)	SUPC-1372-MB	230.88						
	24″(610mm)	SUPC-2124-MB	\$247.52						
	30″(762mm)	SUPC-2130-MB	255.84						
	36″(914mm)	SUPC-2136-MB	264.16						
	42″(1067mm)	SUPC-2142-MB	272.48						
	48″(1219mm)	SUPC-2148-MB	280.80						
54″(1372mm)	SUPC-2154-MB	289.12							
60″(1524mm)	SUPC-2160-MB	297.44							
66″(1676mm)	SUPC-2166-MB	305.76							
72″(1829mm)	SUPC-2172-MB	314.08							


**Screens**

## Rail Mounted Screen

Height	Width	Number	Laminate A	B
<b>Laminate</b>				
12"(305mm)	24"(610mm)	SUPC-1324-DB	\$112.32	\$113.99
	30"(762mm)	SUPC-1330-DB	120.64	122.98
	36"(914mm)	SUPC-1336-DB	128.96	131.97
	42"(1067mm)	SUPC-1342-DB	137.28	140.96
	48"(1219mm)	SUPC-1348-DB	145.60	149.95
	54"(1372mm)	SUPC-1354-DB	153.92	158.94
	60"(1524mm)	SUPC-1360-DB	162.24	167.93
	66"(1676mm)	SUPC-1366-DB	170.56	176.92
	72"(1829mm)	SUPC-1372-DB	178.88	185.91
21"(533mm)	24"(610mm)	SUPC-2124-DB	\$195.52	\$203.83
	30"(762mm)	SUPC-2130-DB	203.84	212.82
	36"(914mm)	SUPC-2136-DB	212.16	221.81
	42"(1067mm)	SUPC-2142-DB	220.48	230.80
	48"(1219mm)	SUPC-2148-DB	228.80	239.79
	54"(1372mm)	SUPC-2154-DB	237.12	248.78
	60"(1524mm)	SUPC-2160-DB	245.44	257.77
	66"(1676mm)	SUPC-2166-DB	253.76	266.76
	72"(1829mm)	SUPC-2172-DB	262.08	275.75
Height	Width	Number	Wood Group A	B
<b>Wood</b>				
12"(305mm)	24"(610mm)	SUPC-1324-WB	\$271.32	\$303.32
	30"(762mm)	SUPC-1330-WB	282.76	316.80
	36"(914mm)	SUPC-1336-WB	294.20	330.28
	42"(1067mm)	SUPC-1342-WB	305.64	343.76
	48"(1219mm)	SUPC-1348-WB	332.08	372.24
	54"(1372mm)	SUPC-1354-WB	358.52	400.72
	60"(1524mm)	SUPC-1360-WB	384.96	429.20
	66"(1676mm)	SUPC-1366-WB	411.40	457.68
	72"(1829mm)	SUPC-1372-WB	437.84	486.16
21"(533mm)	24"(610mm)	SUPC-2124-WB	\$363.48	\$411.88
	30"(762mm)	SUPC-2130-WB	374.92	425.36
	36"(914mm)	SUPC-2136-WB	386.36	438.84
	42"(1067mm)	SUPC-2142-WB	397.80	452.32
	48"(1219mm)	SUPC-2148-WB	424.24	480.80
	54"(1372mm)	SUPC-2154-WB	450.68	509.28
	60"(1524mm)	SUPC-2160-WB	477.12	537.76
	66"(1676mm)	SUPC-2166-WB	503.56	566.24
	72"(1829mm)	SUPC-2172-WB	530.00	594.72
Height	Width	Number	Glass A	C
<b>Glass</b>				
12"(305mm)	24"(610mm)	SUPC-1324-GB	\$167.68	\$229.45
	30"(762mm)	SUPC-1330-GB	178.50	243.63
	36"(914mm)	SUPC-1336-GB	189.32	257.81
	42"(1067mm)	SUPC-1342-GB	200.14	271.99
	48"(1219mm)	SUPC-1348-GB	224.46	299.67
	54"(1372mm)	SUPC-1354-GB	248.78	327.35
	60"(1524mm)	SUPC-1360-GB	273.10	355.03
	66"(1676mm)	SUPC-1366-GB	297.42	382.71
	72"(1829mm)	SUPC-1372-GB	321.74	410.39
21"(533mm)	24"(610mm)	SUPC-2124-GB	\$288.32	\$387.53
	30"(762mm)	SUPC-2130-GB	299.14	401.71
	36"(914mm)	SUPC-2136-GB	309.96	415.89
	42"(1067mm)	SUPC-2142-GB	320.78	430.07
	48"(1219mm)	SUPC-2148-GB	345.10	457.75
	54"(1372mm)	SUPC-2154-GB	369.42	485.43
	60"(1524mm)	SUPC-2160-GB	393.74	513.11
	66"(1676mm)	SUPC-2166-GB	418.06	540.79
	72"(1829mm)	SUPC-2172-GB	442.38	568.47

Accessories

Access Hatch Gap Filler



ZBRA-0000-D

	Number	Trim A	B
Single Sided			
	ZBRA-0000-S	\$46.80	\$57.62
Double Sided			
	ZBRA-0000-D	\$65.00	\$75.82

Features

- Includes painted aluminum extrusion(s) and attachment hardware.
- Fits between a starter and add-on kit, or between two add-on kits, to fill the gap between the access hatches.
- Single sided includes one filler piece; double sided includes two filler pieces.

To Order, Specify:

- 1) Product number.
- 2) Trim color.


Specification Tip

- Single sided filler piece and double side filler piece are specific to the application and cannot be interchanged.



## Accessories

	Actual Height	Actual Depth	Actual Width	Number	Trim A	B
<b>Bin</b>	1"(25mm)	3 1/4"(83mm)	3"(76mm)	BUAB-0303-S	\$31.20	\$32.24
			6"(152mm)	BUAB-0603-S	33.28	35.36
			9"(229mm)	BUAB-0903-S	35.36	38.48

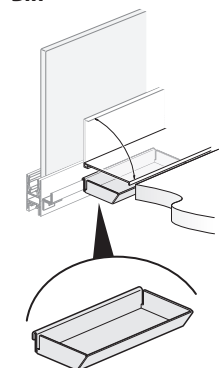

BUAB


**Features**

- Includes one steel accessory bin that fits below the worksurface access hatches.
- Bin hangs from an Intuity Accessory Rail, specified separately.

**To Order, Specify:**

- 1) Product number.
- 2) Trim color.

**Note:** The front on the bin is angled; the bin is 3 1/4"(83mm) deep at the top and 2 1/2"(64mm) deep at the bottom.

**Accessory Rail**

BARS

Actual Height	Actual Depth	Actual Width	Number	Price
7/8"(20mm)	7/8"(20mm)	48"(1219mm)	BARS-4801	\$24.96
		54"(1372mm)	BARS-5401	27.04
		60"(1524mm)	BARS-6001	29.12
		66"(1676mm)	BARS-6601	31.20
		72"(1829mm)	BARS-7201	33.28

**Features**


- Includes one steel accessory rail.
- Attaches to a single or double sided starter kit or add-on kit using a mounting bracket kit, specified separately.
- Supports Intuity Bin accessories that can be accessed through the worksurface access hatches.
- Rail is black finish color.

**To Order, Specify:**

- 1) Product number  
(No finish specification required.)

**Specification Tips**

- Must be used on a starter kit or add-on kit with access hatches.
- Match width of accessory rail to width of starter or add-on kit.
- Specify one accessory rail for use with a single sided starter or add-on kit.
- Specify two accessory rails for use with a double sided starter or add-on kit.
- Can be used on non-powered and powered starter and add-on kits.

**Accessory Rail Mounting Bracket Kit, Single Sided**

BABS


7/8"(20mm)	7/8"(20mm)	BABS-0000	\$26.00
------------	------------	-----------	---------

**Features**

- Includes two mounting brackets and attachment hardware.
- Allows attachment of one accessory rail in a single-sided application.
- Brackets are black finish color.

**To Order, Specify:**

- 1) Product number  
(No finish specification required.)

**Accessory Rail Mounting Bracket Kit, Double Sided**

BABD

3"(76mm)	13 3/4"(349mm)	BABD-0000	\$70.00
----------	----------------	-----------	---------


**Features**

- Includes two mounting brackets and attachment hardware.
- Allows attachment of two accessory rails (back-to-back) in a double-sided application.
- Brackets are black finish color.

**To Order, Specify:**

- 1) Product number  
(No finish specification required.)

# Electrical Components

	Description	Feed Length	Number	Price
<b>Infeed Harness</b>  EUEH-0087-3 EUEH-0087-2 EUEH-0087-4 Class YA – SIN 711-2: Discount Group XIII	<b>3-Circuit</b>			
		87"(2210mm)	EUEH-0087-3	<b>\$173.83</b>
		180"(4572mm)	EUEH-00F0-3	<b>268.65</b>
		300"(7620mm)	EUEH-00W0-3	<b>452.66</b>
	<b>4-Circuit, 2+2</b>			
		87"(2210mm)	EUEH-0087-2	<b>\$190.76</b>
		180"(4572mm)	EUEH-00F0-2	<b>285.58</b>
		300"(7620mm)	EUEH-00W0-2	<b>469.59</b>
	<b>4-Circuit, 3+1</b>			
		87"(2210mm)	EUEH-0087-4	<b>\$190.76</b>
		180"(4572mm)	EUEH-00F0-4	<b>285.58</b>
		300"(7620mm)	EUEH-00W0-4	<b>469.59</b>



## Features

- Includes electrical harness in galvanized metal conduit.
- Conduit for 3-Circuit includes eight 12-gauge wires for up to three 20 amp circuits of power.
- Conduit for 4-Circuit includes six 12-gauge and two 10-gauge wires for up to four 20 amp circuits of power.
- Can be used to route power from floor to power distribution assembly.
- For use with components equipped with power.
- Attaches at any receptacle site or right-hand jumper location.


## To Order, Specify:

- 1) Product number.  
(No finish specification required.)

## Specification Tips

- **Not for use with power sources other than 120 volt 60 hertz.**
- A vertical base feed cover is a separately specified option.
- Exposed split tubing may be field supplied separately to cover exposed galvanized metal conduit.
- Do not mix 3-circuit with 4-circuit components. Do not mix 2+2 and 3+1 components. Components have unique polarity key and color coding (3-circuit = black; 2+2 = blue; 3+1 = green).

## Base Feed Module — Architectural Concealed Hardwire Connection



EUEB-0000-3HY  
EUEB-0000-2HY  
EUEB-0000-4HY

Class SP – SIN 711-2:  
Discount Group V



3-Circuit	EUEB-0000-3HY	<b>\$284.03</b>
4-Circuit, 2+2	EUEB-0000-2HY	<b>\$284.03</b>
4-Circuit, 3+1	EUEB-0000-4HY	<b>\$284.03</b>

## Features

- Includes one junction box with modular connector, flexible steel conduit and three 1/2"(13mm) knockouts.
- Conduit for 3-Circuit includes eight 12-gauge wires for up to three 20 amp circuits of power.
- Conduit for 4-Circuit includes six 12-gauge and two 10-gauge wires for up to four 20 amp circuits of power.
- For use with components equipped with power.
- Attaches at any receptacle site or right-hand jumper location.
- For floor, column or wall hardwire connections.
- Conforms to New York City electrical code.





## To Order, Specify:

- 1) Product number.  
(No finish specification required.)

## Specification Tips


- **Not for use with power sources other than 120 volt 60 hertz.**
- A vertical base feed cover is a separately specified option.
- For installation on components 42"(1067mm) or larger.
- Conduit and fittings for connection between building and junction box are supplied by local electricians.
- Do not mix 3-circuit with 4-circuit components. Do not mix 2+2 and 3+1 components. Components have unique polarity key and color coding (3-circuit = black; 2+2 = blue; 3+1 = green).

## Electrical Components

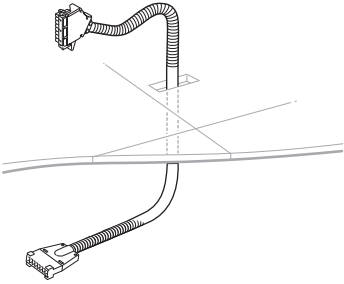	Description	Feed Length	Number	Price
<b>Internal Power Base™ AI Base Feed</b>  EUEJ-0064-3WF EUEJ-0064-2WF EUEJ-0064-4WF Class SP – SIN 711-1: Discount Group V 	<b>3-Circuit</b>			
		64"(1626mm)	EUEJ-0064-3WF	\$173.83
		144"(3658mm)	EUEJ-0144-3WF	241.56
		300"(7620mm)	EUEJ-0300-3WF	576.84
	<b>4-Circuit, 2+2</b>			
		64"(1626mm)	EUEJ-0064-2WF	\$190.76
		144"(3658mm)	EUEJ-0144-2WF	258.49
		300"(7620mm)	EUEJ-0300-2WF	593.77
	<b>4-Circuit, 3+1</b>			
		64"(1626mm)	EUEJ-0064-4WF	\$190.76
		144"(3658mm)	EUEJ-0144-4WF	258.49
		300"(7620mm)	EUEJ-0300-4WF	593.77
	<b>Features</b>	<ul style="list-style-type: none"> <li>Includes connector assembly which consists of one Power Base connector head, galvanized 1/2"(13mm) flexible metal conduit, one Power Base AI connector head and a two port splitter.</li> <li>Conduit for 3-Circuit includes eight 12-gauge wires for up to three 20 amp circuits of power.</li> <li>Conduit for 4-Circuit includes six 12-gauge and two 10-gauge wires for up to four 20 amp circuits of power.</li> <li>For use with components equipped with power.</li> <li>Attaches at any receptacle site or right-hand jumper location and to a Power Base AI underfloor power system.</li> </ul>		
	<b>To Order, Specify:</b>	1) Product number. (No finish specification required.)		
	<b>Specification Tips</b>	<ul style="list-style-type: none"> <li><b>Not for use with power sources other than 120 volt 60 hertz.</b></li> <li>A vertical base feed cover is a separately specified option when used with Intuity.</li> <li>Exposed split tubing may be field supplied separately to cover exposed galvanized metal conduit.</li> <li>Excess length can be coiled under floor.</li> <li>Do not mix 3-circuit with 4-circuit components. Do not mix 2+2 and 3+1 components. Components have unique polarity key and color coding (3-circuit = black; 2+2 = blue; 3+1 = green).</li> </ul>		
<b>Jumper</b>  EUEJ-0018-3 EUEJ-0024-2 EUEJ-0024-4 Class YA – SIN 711-2; Discount Group XIII 	<b>Description</b>	<b>Actual Length</b>	<b>Number</b>	<b>Price</b>
	3-Circuit	24"(610mm)	EUEJ-0024-3	\$104.52
	4-Circuit, 2+2	24"(610mm)	EUEJ-0024-2	\$111.34
	4-Circuit, 3+1	24"(610mm)	EUEJ-0024-4	\$111.34
	<b>Features</b>	<ul style="list-style-type: none"> <li>Includes flexible metal power jumper with safety latches.</li> <li>For use with power components.</li> <li>Jumpers cannot be coupled together.</li> <li>Field installed.</li> </ul>		
	<b>To Order, Specify:</b>	1) Product number. (No finish specification required.)		
	<b>Specification Tips:</b>	<ul style="list-style-type: none"> <li><b>Jumpers are used to connect between Power Distribution Assemblies mounted in Utility Trays in an in-line benching application.</b></li> <li>One 24"(610mm) jumper is included with Add-On Kit.</li> <li>For use with Intuity product reconfigurations.</li> <li>Do not mix 3-circuit with 4-circuit components. Do not mix 2+2 and 3+1 components. Components have unique polarity key and color coding (3-circuit = black; 2+2 = blue; 3+1 = green).</li> </ul>		

# Electrical Components

## Utility Tray Power Retrofit Kit



EUEK-3S  
EUEK-2S  
EUEK-4S



Description	Panel Width	Number	Price
<b>3-Circuit</b>			
	42"(1067mm)	EUEK-0042-3S	<b>\$47.73</b>
	48"(1219mm)	EUEK-0048-3S	<b>53.42</b>
	54"(1372mm)	EUEK-0054-3S	<b>59.11</b>
	60"(1524mm)	EUEK-0060-3S	<b>64.80</b>
	66"(1676mm)	EUEK-0066-3S	<b>70.49</b>
	72"(1829mm)	EUEK-0072-3S	<b>76.18</b>
<b>4-Circuit, 2+2</b>			
	42"(1067mm)	EUEK-0042-2S	<b>\$47.73</b>
	48"(1219mm)	EUEK-0048-2S	<b>53.42</b>
	54"(1372mm)	EUEK-0054-2S	<b>59.11</b>
	60"(1524mm)	EUEK-0060-2S	<b>64.80</b>
	66"(1676mm)	EUEK-0066-2S	<b>70.49</b>
	72"(1829mm)	EUEK-0072-2S	<b>76.18</b>
<b>4-Circuit, 3+1</b>			
	42"(1067mm)	EUEK-0042-4S	<b>\$47.73</b>
	48"(1219mm)	EUEK-0048-4S	<b>53.42</b>
	54"(1372mm)	EUEK-0054-4S	<b>59.11</b>
	60"(1524mm)	EUEK-0060-4S	<b>64.80</b>
	66"(1676mm)	EUEK-0066-4S	<b>70.49</b>
	72"(1829mm)	EUEK-0072-4S	<b>76.18</b>

### Features

- Includes Power Distribution Assembly (PDA).
- Field installed.

### To Order, Specify:


- 1) Product number.  
(No finish specification required.)

### Specification Tips:

- Used to convert non-powered Utility Tray to powered.
- **Separately Specify:**
  - Receptacles
  - Jumpers
  - Power Infeeds
  - Utility Tray End Covers
- When adding retrofit kit, order PDA mounting brackets, service part #2305-8603, separately.
- Do not mix 3-circuit with 4-circuit components. Do not mix 2+2 and 3+1 components. Components have unique polarity key and color coding (3-circuit = black; 2+2 = blue; 3+1 = green).

## Electrical Components

## Top Feed



EKET-C000-3S  
EKET-C000-2S  
EKET-C000-4S



Floor Mount  
EKET-3S

Description	Ceiling Height	Pole Length	Number	Trim A	B
<b>Floor Mount Height</b>					
3-Circuit	10'(3048mm)	138"(3505mm)	EKET-C000-3S	<b>\$822.54</b>	<b>\$877.08</b>
	12'(3658mm)	150"(3810mm)	EKET-E400-3S	<b>840.72</b>	<b>904.35</b>
4-Circuit, 2+2	10'(3048mm)	138"(3505mm)	EKET-C000-2S	<b>\$822.54</b>	<b>\$877.08</b>
	12'(3658mm)	150"(3810mm)	EKET-E400-2S	<b>840.72</b>	<b>904.35</b>
4-Circuit, 3+1	10'(3048mm)	138"(3505mm)	EKET-C000-4S	<b>\$822.54</b>	<b>\$877.08</b>
	12'(3658mm)	150"(3810mm)	EKET-E400-4S	<b>840.72</b>	<b>904.35</b>

**Features**

- Includes one 180"(4572mm) electrical harness in metal conduit, electrical box, ceiling bezel plate, pole and hardware.
- Conduit for 3-Circuit includes eight 12-gauge wires for up to three 20 amp circuits of power.
- Conduit for 4-Circuit includes six 12-gauge and two 10-gauge wires for up to four 20 amp circuits of power.
- For connection to the electrical source located in space above a drop ceiling.
- Removable cover on poles provides access to pathway.
- Top feed pole dimensions: 2.5"(64mm) x 8"(203mm).
- Harness attaches at any receptacle site or right-hand jumper location.

**To Order, Specify:**


- 1) Product number.
- 2) Trim color.

**Specification Tips**


- **Not for use with power sources other than 120 volt 60 hertz.**
- Electrical harness length is 180"(4572mm) regardless of pole length.
- Top Feed may interfere with Tool Rail or Screen applications.
- Floor mount Top Feed mounts to floor, attaches to desk surface at any side and ceiling.
- Floor attachment hardware is field supplied.
- Do not mix 3-circuit with 4-circuit components. Do not mix 2+2 and 3+1 components. Components have unique polarity key and color coding (3-circuit = black; 2+2 = blue; 3+1 = green).

# Electrical Components

## Triplex Receptacles — 15 AMP



common



isolated

EUER-0015-3MN3  
EUER-0015-2M13  
EUER-0015-4M13

Class YA – SIN 711-2:  
Discount Group XIII



Description	Circuit Access	Receptacle Indicator	Ground Type	Number	Price
<b>3-Circuit – 15 Amp Triplex</b>					
	Circuit 1-3	N/A	Common	EUER-0015-3MN3	<b>\$111.34</b>
	Circuit 1-3	N/A	Isolated	EUER-0015-3IN3	<b>118.16</b>
<b>4-Circuit, 2+2 – 15 Amp Triplex</b>					
	Circuit 1	1	Common	EUER-0015-2M13	<b>\$159.06</b>
	Circuit 2	2		EUER-0015-2M23	<b>159.06</b>
	Circuit 3	3		EUER-0015-2M33	<b>159.06</b>
	Circuit 4	4		EUER-0015-2M43	<b>159.06</b>
	Circuit 1	1	Isolated	EUER-0015-2I13	<b>\$165.88</b>
	Circuit 2	2		EUER-0015-2I23	<b>165.88</b>
	Circuit 3	3		EUER-0015-2I33	<b>165.88</b>
	Circuit 4	4		EUER-0015-2I43	<b>165.88</b>
<b>4-Circuit, 3+1 – 15 Amp Triplex</b>					
	Circuit 1	A	Common	EUER-0015-4M13	<b>\$159.06</b>
	Circuit 2	B		EUER-0015-4M23	<b>159.06</b>
	Circuit 3	C		EUER-0015-4M33	<b>159.06</b>
	Circuit 4	D		EUER-0015-4M43	<b>159.06</b>
	Circuit 1	A	Isolated	EUER-0015-4I13	<b>\$165.88</b>
	Circuit 2	B		EUER-0015-4I23	<b>165.88</b>
	Circuit 3	C		EUER-0015-4I33	<b>165.88</b>
	Circuit 4	D		EUER-0015-4I43	<b>165.88</b>

### Features

- Includes box of six receptacles, each receptacle has three 15 Amp outlets (NEMA-5-15R configuration).
- For use with product equipped with power components.
- Receptacles are ground type specific.
- Standard in smoke.


### To Order, Specify:

- 1) Product number.  
(No finish specification required.)

### Specification Tips:

- For use with PDA in the below worksurface utility tray.
- **Triplexes for 3-Circuit are field programmable.**
- **Triplexes for 4-Circuit have fixed circuit access and are not field programmable. Specify appropriate number of receptacles for each circuit.**
- **Not for use with power sources other than 120 volt 60 hertz.**
- Do not mix 3-circuit and with 4-circuit components. Do not mix 2+2 and 3+1 components. Components have unique polarity key and color coding (3-circuit = black; 2+2 = blue; 3+1 = green).

## 15 Amp Duplex Receptacle with USB Charging Outlet



common



EUER-0015-3M13U  
EUER-0015-2M13U  
EUER-0015-4M13U

Class YA – SIN 711-1:  
Discount Group XIII



3-Circuit	Circuit 1	Common	EUER-0015-3M13U	<b>\$504.19</b>
4-Circuit, 2+2	Circuit 1	Common	EUER-0015-2M13U	<b>\$504.19</b>
4-Circuit, 3+1	Circuit 1	Common	EUER-0015-4M13U	<b>\$504.19</b>

### Features

- Includes box of six receptacles, each receptacle has two 15 Amp outlets (NEMA 5-15R configuration) and two USB charging outlets.
- For use with panels equipped with power components.
- Receptacles are common ground only.
- USB 2 Amp shared; 5VDC.

### To Order, Specify:




- 1) Product number.
- 2) Non-metallic trim color.

### Specification Tips

- **Receptacles have fixed circuit access to circuit one only and are not field programmable.**
- For power access at any location within the panels with appropriate base raceway covers or technology pad.
- **Not for use with power sources other than 120 volt 60 hertz.**
- Do not mix 3-circuit with 4-circuit components. Do not mix 2+2 and 3+1 components. Components have unique polarity key and color coding (3-circuit=black; 2+2=blue and 3+1=green).



## Electrical Components

	Description	Circuit Access	Receptacle Indicator	Ground Type	Number	Price
<b>Triplex Receptacles — 20 AMP</b>   common   isolated  EUER-0020-3M13 EUER-0015-2M13 EUER-0015-4M13  	<b>3-Circuit – 20 Amp Triplex</b>					
		Circuit 1	I	Common	EUER-0020-3M13	<b>\$329.48</b>
		Circuit 2	II		EUER-0020-3M23	<b>329.48</b>
		Circuit 3	III		EUER-0020-3M33	<b>329.48</b>
		Circuit 1	I	Isolated	EUER-0020-3I13	<b>\$336.30</b>
		Circuit 2	II		EUER-0020-3I23	<b>336.30</b>
		Circuit 3	III		EUER-0020-3I33	<b>336.30</b>
	<b>4-Circuit, 2+2 – 20 Amp Triplex</b>					
		Circuit 1	1	Common	EUER-0020-2M13	<b>\$329.48</b>
		Circuit 2	2		EUER-0020-2M23	<b>329.48</b>
		Circuit 3	3		EUER-0020-2M33	<b>329.48</b>
		Circuit 4	4		EUER-0020-2M43	<b>329.48</b>
		Circuit 1	1	Isolated	EUER-0020-2I13	<b>\$336.30</b>
		Circuit 2	2		EUER-0020-2I23	<b>336.30</b>
		Circuit 3	3		EUER-0020-2I33	<b>336.30</b>
		Circuit 4	4		EUER-0020-2I43	<b>336.30</b>
	<b>4-Circuit, 3+1 – 20 Amp Triplex</b>					
		Circuit 1	A	Common	EUER-0020-4M13	<b>\$329.48</b>
		Circuit 2	B		EUER-0020-4M23	<b>329.48</b>
		Circuit 3	C		EUER-0020-4M33	<b>329.48</b>
		Circuit 4	D		EUER-0020-4M43	<b>329.48</b>
		Circuit 1	A	Isolated	EUER-0020-4I13	<b>\$336.30</b>
		Circuit 2	B		EUER-0020-4I23	<b>336.30</b>
		Circuit 3	C		EUER-0020-4I33	<b>336.30</b>
		Circuit 4	D		EUER-0020-4I43	<b>336.30</b>

**Features**

- Includes box of six receptacles, each receptacle has three 20 Amp outlets (NEMA-5-20R configuration).
- For use with product equipped with power components.
- Receptacles are circuit and ground type specific.
- Standard in smoke.

**To Order, Specify:**


- 1) Product number.  
(No finish specification required.)

**Specification Tips:**

- For use with PDA in the below worksurface utility tray.
- **Receptacles have fixed circuit access and are not field programmable.**
- **Specify appropriate number of receptacles for each circuit.**
- **Not for use with power sources other than 120 volt 60 hertz.**
- Do not mix 3-circuit with 4-circuit components. Do not mix 2+2 and 3+1 components. Components have unique polarity key and color coding (3-circuit = black; 2+2 = blue; 3+1 = green).

Electrical Components

Hardwire

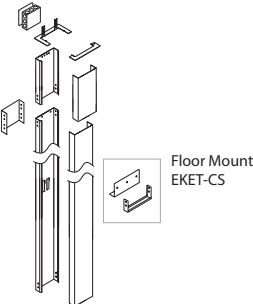

Floor Mount  
EKET-CS

EKET-C000-CS

Height	Ceiling Height	Pole Length	Number	Trim A	B
Top Feed — Hardwire					
Floor Mount Height					
Hardwire	10'(3048mm)	138''(3505mm)	EKET-C000-CS	\$289.70	\$344.24
	12'(3658mm)	150''(3810mm)	EKET-E400-CS	307.88	371.51

Features



- Includes one electrical box, ceiling bezel plate, pole and hardware.
- For connection to the electrical source located in space above a drop ceiling.
- For routing and cabling capacities, refer to Specification Guide.
- Removable cover on poles provides access to pathway.
- Top feed pole dimensions: 2.5''(64mm) x 8''(203mm).

To Order, Specify:

- 1) Product number.
- 2) Trim color.


Specification Tips

- **Not for use with power sources other than 120 volt 60 hertz.**
- Top Feed may interfere with Tool Rail or Screen applications.
- Floor mount Top Feed mounts to floor, attaches to desking worksurface at any side and ceiling.
- Floor attachment hardware is field supplied.

Cover Plates		Number	1	Trim	A	B
 EUAP-0000-CB		EUAP-0000-C			\$22.73	\$28.42
<b>Features</b> <ul style="list-style-type: none"><li>• Includes four blank cover plates or receptacle covers and hardware.</li></ul>		<b>To Order, Specify:</b> 1) Product number.				
<b>Specification Tips</b> <ul style="list-style-type: none"><li>• For hardwire kit applications.</li><li>• Receptacle cover option (R) to be used with duplex receptacle. (Duplex receptacle field supplied).</li></ul>		<b>1 Cover Options:</b> <div><b>B</b> Blank cover</div> <div><b>R</b> Receptacle cover; <b>\$5.69</b> upcharge list.</div> 2) Trim color.				
 EUAP-0000-CR						

Electrical Accessories

	Description	Bottom of surface to floor	Number	Trim	
				A	B
Base Feed Cover — Vertical	Fixed Height	27.5"-28.5"(699mm-724mm)	EUAC-0000-F	\$142.02	\$151.11
	Adjustable Height	25.5"-32.5"(648mm-826mm)	EUAC-0000-A	142.02	151.11

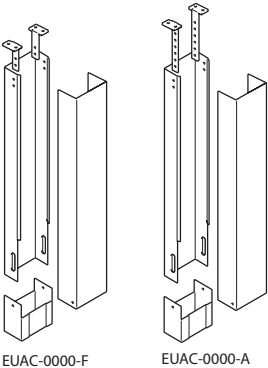

Features

- Includes 2-piece base feed cover and attachment hardware.
- Optional base feed cover is used to conceal metal conduit and data cables.
- Base feed dimension: 2"(51mm) x 4.25"(108mm).

To Order, Specify:





- 1) Product number.
- 2) Trim color.

Specification Tips


- Used to route power and data from floor, columns and walls to bottom of horizontal surface.
- Mounts under horizontal surface and attaches to floor.
- Floor attachment hardware is field supplied.

# 1.5H Credenzas with Drawers

48" Wide — Laminate Case with Steel Front



GCLS-2148

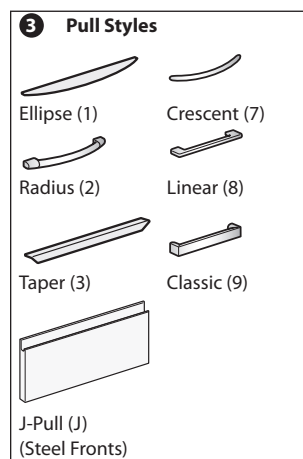

## Features

- Includes:
  - Laminate top, end panels, and interior vertical divider.
  - Painted steel drawer fronts, back panel, bottom panel, and one adjustable shelf for the open section.
  - Counterweight (when applicable).
- 1 3/16" (30mm) thick laminate top has 3mm edgeband on front and back, 1mm edgeband on the sides.
- Laminate end panels and interior vertical divider have 1mm edgeband on all sides.
- Available with storage back panel or full back panel:
  - Storage back panel provides enclosure to the drawer section only.
  - Full back panel provides enclosure along the entire back.
- Available with a standard side panel base, or base with toe kick panel:
  - Standard base; credenza end panels extend past the bottom panel to the floor, leaving 1 3/4" (30mm) open space below the bottom panel.
  - Base with toe kick; encloses the open space below the bottom panel (front only).
- Available with or without lock; single lock is chrome and locks both drawers.
- Drawers have full extension ball-bearing slides.
- Drawer interiors are black.
- File drawer includes side-to-side hanging file bars.
- Optional drawer pulls include Ellipse, Radius, Taper, Crescent, Linear, Classic, and J-Pull.
  - Ellipse pull available in non-metallic trim colors only.
  - Radius pull available in metallic trim colors only.
  - Taper pull color matches painted steel back, bottom, and shelf.
  - J-Pull trim color matches painted steel front.
  - Crescent, Linear and Classic pulls are brushed nickel finish.
- Open section has three shelf mounting locations; hole locations are in 1 1/4" (32mm) increments, with the lowest location 10 1/4" (260mm) above bottom panel.
- Shelves are 3/4" (19mm) thick and 16 1/2" (419mm) deep.
- Interior height of open section is 17 1/2" (445mm).
- Glides provide 1" (25mm) adjustment range.
- Ships fully assembled.

## Specification Tips

- Credenza units are not field retrofitable.
- Designed to be used with Haworth's Integrated Palette; UniGroup Too, PREMISE, Reside Desking, and Intuity Bench.
- 48" (1219mm) wide credenza is freestanding; unit with 24" (610mm) wide drawers does not require a counterweight, unit with 30" (762mm) wide drawers includes a counterweight for proper stability.
- File drawer does not accommodate the File Drawer Insert.
- Bookcase section with shelf is open at the back unless the credenza is specified with a full back panel.
- If credenza is used in a nested application, verify clearance heights.

**Notes:** The following products can be separately specified and field installed:

- Grommet
- File/Storage Cushion
- Adjustable Shelf
- Drawer Liner
- Recycle Bin
- Personal Tray
- Front-to-Back File Bars

For additional credenza options/configurations, see the A Series Storage Price List.

## To Order, Specify:

1) Product number, including:

### 1 Back Panel Type:

- C** Storage Back Panel
- F** Full Back Panel, add **\$28.92** list

### 2 Base Type:

- S** Standard Base
- T** Base with Toe Kick, add **\$17.19** list

### 3 Pull (see side bar):

### 4 Lock Option:

- N** No Lock
- Y** Lock, add **\$26.78** list

- Laminate color for top and end panels.
- Edge trim color for top and end panels.
- Trim color for drawer fronts.
- Trim color for back/bottom/shelf.
- Trim color for pull (Ellipse and Radius only).






# 1.5H Credenzas with Drawers

48" Wide — Laminate Case with Steel Front


Height	Depth	Width	Pull	Number	①②③④	Front - Steel Trim A		Front - Steel Trim B	
						Shelf & Back - Steel Trim A	Trim B	Shelf & Back - Steel Trim A	Trim B
Case — Laminate A									
Left-Hand									
24”(610mm) Box/File Left/24”(610mm) Open Right									
21”(533mm)	18”(457mm)	48”(1219mm)	1, J	GCLS-2148-BUN	<div><div></div><div></div><div></div><div></div></div>	\$1284.87	\$1292.90	\$1303.13	\$1311.16
			2, 3	GCLS-2148-BUN	<div><div></div><div></div><div></div><div></div></div>	1338.43	1346.46	1356.69	1364.72
			7, 8, 9	GCLS-2148-BUN	<div><div></div><div></div><div></div><div></div></div>	1349.15	1357.18	1367.41	1375.44
30”(762mm) Box/File Left/18”(457mm) Open Right									
21”(533mm)	18”(457mm)	48”(1219mm)	1, J	GCLS-2148-CTN	<div><div></div><div></div><div></div><div></div></div>	\$1304.13	\$1312.16	\$1322.39	\$1330.42
			2, 3	GCLS-2148-CTN	<div><div></div><div></div><div></div><div></div></div>	1357.69	1365.72	1375.95	1383.98
			7, 8, 9	GCLS-2148-CTN	<div><div></div><div></div><div></div><div></div></div>	1368.41	1376.44	1386.67	1394.70
Right-Hand									
24”(610mm) Open Left/24”(610mm) Box/File Right									
21”(533mm)	18”(457mm)	48”(1219mm)	1, J	GCLS-2148-UBN	<div><div></div><div></div><div></div><div></div></div>	\$1284.87	\$1292.90	\$1303.13	\$1311.16
			2, 3	GCLS-2148-UBN	<div><div></div><div></div><div></div><div></div></div>	1338.43	1346.46	1356.69	1364.72
			7, 8, 9	GCLS-2148-UBN	<div><div></div><div></div><div></div><div></div></div>	1349.15	1357.18	1367.41	1375.44
18”(457mm) Open Left/30”(762mm) Box/File Right									
21”(533mm)	18”(457mm)	48”(1219mm)	1, J	GCLS-2148-TCN	<div><div></div><div></div><div></div><div></div></div>	\$1304.13	\$1312.16	\$1322.39	\$1330.42
			2, 3	GCLS-2148-TCN	<div><div></div><div></div><div></div><div></div></div>	1357.69	1365.72	1375.95	1383.98
			7, 8, 9	GCLS-2148-TCN	<div><div></div><div></div><div></div><div></div></div>	1368.41	1376.44	1386.67	1394.70
Case — Laminate B									
Left-Hand									
24”(610mm) Box/File Left/24”(610mm) Open Right									
21”(533mm)	18”(457mm)	48”(1219mm)	1, J	GCLS-2148-BUN	<div><div></div><div></div><div></div><div></div></div>	\$1349.45	\$1357.48	\$1367.71	\$1375.74
			2, 3	GCLS-2148-BUN	<div><div></div><div></div><div></div><div></div></div>	1403.01	1411.04	1421.27	1429.30
			7, 8, 9	GCLS-2148-BUN	<div><div></div><div></div><div></div><div></div></div>	1413.73	1421.76	1431.99	1440.02
30”(762mm) Box/File Left/18”(457mm) Open Right									
21”(533mm)	18”(457mm)	48”(1219mm)	1, J	GCLS-2148-CTN	<div><div></div><div></div><div></div><div></div></div>	\$1368.71	\$1376.74	\$1386.97	\$1395.00
			2, 3	GCLS-2148-CTN	<div><div></div><div></div><div></div><div></div></div>	1422.27	1430.30	1440.53	1448.56
			7, 8, 9	GCLS-2148-CTN	<div><div></div><div></div><div></div><div></div></div>	1432.99	1441.02	1451.25	1459.28
Right-Hand									
24”(610mm) Open Left/24”(610mm) Box/File Right									
21”(533mm)	18”(457mm)	48”(1219mm)	1, J	GCLS-2148-UBN	<div><div></div><div></div><div></div><div></div></div>	\$1349.45	\$1357.48	\$1367.71	\$1375.74
			2, 3	GCLS-2148-UBN	<div><div></div><div></div><div></div><div></div></div>	1403.01	1411.04	1421.27	1429.30
			7, 8, 9	GCLS-2148-UBN	<div><div></div><div></div><div></div><div></div></div>	1413.73	1421.76	1431.99	1440.02
18”(457mm) Open Left/30”(762mm) Box/File Right									
21”(533mm)	18”(457mm)	48”(1219mm)	1, J	GCLS-2148-TCN	<div><div></div><div></div><div></div><div></div></div>	\$1368.71	\$1376.74	\$1386.97	\$1395.00
			2, 3	GCLS-2148-TCN	<div><div></div><div></div><div></div><div></div></div>	1422.27	1430.30	1440.53	1448.56
			7, 8, 9	GCLS-2148-TCN	<div><div></div><div></div><div></div><div></div></div>	1432.99	1441.02	1451.25	1459.28

# 1.5H Credenzas with Drawers

60" Wide — Laminate Case with Steel Front



GCLS-2160

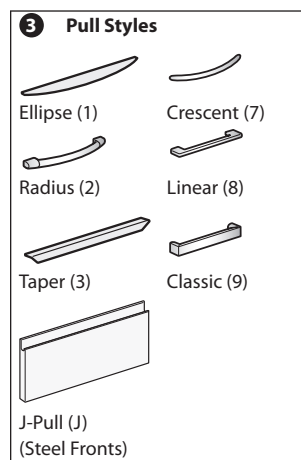

## Features

- Includes:
  - Laminate top, end panels, and interior vertical divider(s).
  - Painted steel drawer fronts, back panel, bottom panel, and one adjustable shelf for each open section.
  - Counterweight (when applicable).
- 1 3/16" (30mm) thick laminate top has 3mm edgeband on front and back, 1mm edgeband on the sides.
- Laminate end panels and interior vertical dividers have 1mm edgeband on all sides.
- Available with storage back panel or full back panel:
  - Storage back panel provides enclosure to the drawer section only.
  - Full back panel provides enclosure along the entire back.
- Available with a standard side panel base, or base with toe kick panel:
  - Standard base; credenza end panels extend past the bottom panel to the floor, leaving 1 3/4" (30mm) open space below the bottom panel.
  - Base with toe kick; encloses the open space below the bottom panel (front only).
- Available with or without lock; single lock is chrome and locks both drawers.
- Drawers have full extension ball-bearing slides.
- Drawer interiors are black.
- File drawer includes side-to-side hanging file bars.
- Optional drawer pulls include Ellipse, Radius, Taper, Crescent, Linear, Classic, and J-Pull.
  - Ellipse pull available in non-metallic trim colors only.
  - Radius pull available in metallic trim colors only.
  - Taper pull color matches painted steel back, bottom, and shelf.
  - J-Pull trim color matches painted steel front.
  - Crescent, Linear and Classic pulls are brushed nickel finish.
- Each open section has three shelf mounting locations; hole locations are in 1 1/4" (32mm) increments, with the lowest location 10 1/4" (260mm) above bottom panel.
- Shelves are 3/4" (19mm) thick and 16 1/2" (419mm) deep.
- Interior height of open section is 17 1/2" (445mm).
- Glides provide 1" (25mm) adjustment range.
- Ships fully assembled.

## Specification Tips

- Credenza units are not field retrofitable.
- Designed to be used with Haworth's Integrated Palette; UniGroup Too, PREMISE, Reside Desking, and Intuity Bench.
- 60" (1524mm) wide credenza is freestanding; unit with 30" (762mm) wide drawers does not require a counterweight, unit with 36" (914mm) wide drawers includes a counterweight for proper stability.
- File drawer does not accommodate the File Drawer Insert.
- Bookcase section with shelf is open at the back unless the credenza is specified with a full back panel.
- If credenza is used in a nested application, verify clearance heights.

**Notes:** The following products can be separately specified and field installed:

- Grommet
- File/Storage Cushion
- Adjustable Shelf
- Drawer Liner
- Recycle Bin
- Personal Tray
- Front-to-Back File Bars

For additional credenza options/configurations, see the A Series Storage Price List.

## To Order, Specify:

1) Product number, including:

### 1 Back Panel Type:

- C** Storage Back Panel
- F** Full Back Panel, add **\$41.78** list

### 2 Base Type:

- S** Standard Base
- T** Base with Toe Kick, add **\$23.67** list

### 3 Pull (see side bar):

### 4 Lock Option:

- N** No Lock
- Y** Lock, add **\$26.78** list

2) Laminate color for top and end panels.

3) Edge trim color for top and end panels.

4) Trim color for drawer fronts.

5) Trim color for back/bottom/shelf.

6) Trim color for pull (Ellipse and Radius only).

# 1.5H Credenzas with Drawers



60" Wide — Laminate Case with Steel Front

Height	Depth	Width	Pull	Number	①②③④	Front - Steel Trim A		Front - Steel Trim B	
						Shelf & Back - Steel Trim A	Steel Trim B	Shelf & Back - Steel Trim A	Steel Trim B
Case — Laminate A									
Left-Hand									
30”(762mm) Box/File Left/30”(762mm) Open Right									
21”(533mm)	18”(457mm)	60”(1524mm)	1, J	GCLS-2160-CVN	<div></div> <div></div> <div></div> <div></div>	\$1338.81	\$1346.84	\$1363.55	\$1371.58
			2, 3	GCLS-2160-CVN	<div></div> <div></div> <div></div> <div></div>	1392.37	1400.40	1417.11	1425.14
			7, 8, 9	GCLS-2160-CVN	<div></div> <div></div> <div></div> <div></div>	1403.09	1411.12	1427.83	1435.86
36”(914mm) Box/File Left/24”(610mm) Open Right									
21”(533mm)	18”(457mm)	60”(1524mm)	1, J	GCLS-2160-DUN	<div></div> <div></div> <div></div> <div></div>	\$1358.07	\$1366.10	\$1382.81	\$1390.84
			2, 3	GCLS-2160-DUN	<div></div> <div></div> <div></div> <div></div>	1411.63	1419.66	1436.37	1444.40
			7, 8, 9	GCLS-2160-DUN	<div></div> <div></div> <div></div> <div></div>	1422.35	1430.38	1447.09	1455.12
Right-Hand									
30”(762mm) Open Left/30”(762mm) Box/File Right									
21”(533mm)	18”(457mm)	60”(1524mm)	1, J	GCLS-2160-VCN	<div></div> <div></div> <div></div> <div></div>	\$1338.81	\$1346.84	\$1363.55	\$1371.58
			2, 3	GCLS-2160-VCN	<div></div> <div></div> <div></div> <div></div>	1392.37	1400.40	1417.11	1425.14
			7, 8, 9	GCLS-2160-VCN	<div></div> <div></div> <div></div> <div></div>	1403.09	1411.12	1427.83	1435.86
24”(610mm) Open Left/36”(914mm) Box/File Right									
21”(533mm)	18”(457mm)	60”(1524mm)	1, J	GCLS-2160-UDN	<div></div> <div></div> <div></div> <div></div>	\$1358.07	\$1366.10	\$1382.81	\$1390.84
			2, 3	GCLS-2160-UDN	<div></div> <div></div> <div></div> <div></div>	1411.63	1419.66	1436.37	1444.40
			7, 8, 9	GCLS-2160-UDN	<div></div> <div></div> <div></div> <div></div>	1422.35	1430.38	1447.09	1455.12
Non-Handed									
15”(381mm) Open Left/30”(762mm) Box/File Center/15”(381mm) Open Right									
21”(533mm)	18”(457mm)	60”(1524mm)	1, J	GCLS-2160-RCR	<div></div> <div></div> <div></div> <div></div>	\$1370.95	\$1378.98	\$1395.69	\$1403.72
			2, 3	GCLS-2160-RCR	<div></div> <div></div> <div></div> <div></div>	1424.51	1432.54	1449.25	1457.28
			7, 8, 9	GCLS-2160-RCR	<div></div> <div></div> <div></div> <div></div>	1435.23	1443.26	1459.97	1468.00
Case — Laminate B									
Left-Hand									
30”(762mm) Box/File Left/30”(762mm) Open Right									
21”(533mm)	18”(457mm)	60”(1524mm)	1, J	GCLS-2160-CVN	<div></div> <div></div> <div></div> <div></div>	\$1406.27	\$1414.30	\$1431.01	\$1439.04
			2, 3	GCLS-2160-CVN	<div></div> <div></div> <div></div> <div></div>	1459.83	1467.86	1484.57	1492.60
			7, 8, 9	GCLS-2160-CVN	<div></div> <div></div> <div></div> <div></div>	1470.55	1478.58	1495.29	1503.32
36”(914mm) Box/File Left/24”(610mm) Open Right									
21”(533mm)	18”(457mm)	60”(1524mm)	1, J	GCLS-2160-DUN	<div></div> <div></div> <div></div> <div></div>	\$1425.53	\$1433.56	\$1450.27	\$1458.30
			2, 3	GCLS-2160-DUN	<div></div> <div></div> <div></div> <div></div>	1479.09	1487.12	1503.83	1511.86
			7, 8, 9	GCLS-2160-DUN	<div></div> <div></div> <div></div> <div></div>	1489.81	1497.84	1514.55	1522.58
Right-Hand									
30”(762mm) Open Left/30”(762mm) Box/File Right									
21”(533mm)	18”(457mm)	60”(1524mm)	1, J	GCLS-2160-VCN	<div></div> <div></div> <div></div> <div></div>	\$1406.27	\$1414.30	\$1431.01	\$1439.04
			2, 3	GCLS-2160-VCN	<div></div> <div></div> <div></div> <div></div>	1459.83	1467.86	1484.57	1492.60
			7, 8, 9	GCLS-2160-VCN	<div></div> <div></div> <div></div> <div></div>	1470.55	1478.58	1495.29	1503.32
24”(610mm) Open Left/36”(914mm) Box/File Right									
21”(533mm)	18”(457mm)	60”(1524mm)	1, J	GCLS-2160-UDN	<div></div> <div></div> <div></div> <div></div>	\$1425.53	\$1433.56	\$1450.27	\$1458.30
			2, 3	GCLS-2160-UDN	<div></div> <div></div> <div></div> <div></div>	1479.09	1487.12	1503.83	1511.86
			7, 8, 9	GCLS-2160-UDN	<div></div> <div></div> <div></div> <div></div>	1489.81	1497.84	1514.55	1522.58
Non-Handed									
15”(381mm) Open Left/30”(762mm) Box/File Center/15”(381mm) Open Right									
21”(533mm)	18”(457mm)	60”(1524mm)	1, J	GCLS-2160-RCR	<div></div> <div></div> <div></div> <div></div>	\$1438.41	\$1446.44	\$1463.15	\$1471.18
			2, 3	GCLS-2160-RCR	<div></div> <div></div> <div></div> <div></div>	1491.97	1500.00	1516.71	1524.74
			7, 8, 9	GCLS-2160-RCR	<div></div> <div></div> <div></div> <div></div>	1502.69	1510.72	1527.43	1535.46



# 1.5H Credenzas with Drawers

72" Wide — Laminate Case with Steel Front

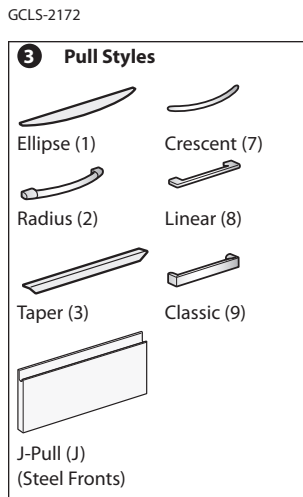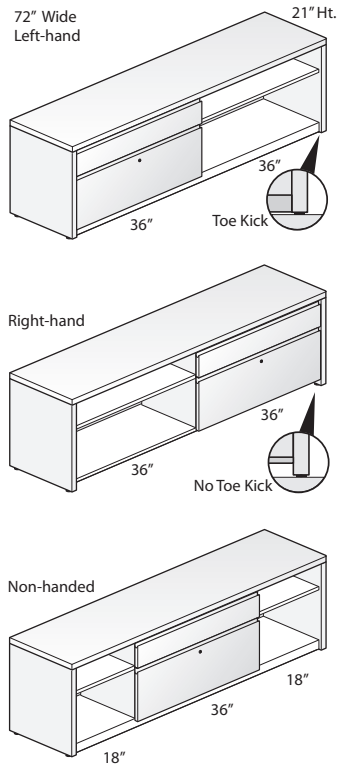

## Features

- Includes:
  - Laminate top, end panels, and interior vertical divider(s).
  - Painted steel drawer fronts, back panel, bottom panel, and one adjustable shelf for each open section.
  - Counterweight (when applicable).
- 1 3/16" (30mm) thick laminate top has 3mm edgeband on front and back, 1mm edgeband on the sides.
- Laminate end panels and interior vertical dividers have 1mm edgeband on all sides.
- Available with storage back panel or full back panel:
  - Storage back panel provides enclosure to the drawer section only.
  - Full back panel provides enclosure along the entire back.
- Available with a standard side panel base, or base with toe kick panel:
  - Standard base; credenza end panels extend past the bottom panel to the floor, leaving 1 3/4" (30mm) open space below the bottom panel.
  - Base with toe kick; encloses the open space below the bottom panel (front only).
- Available with or without lock; single lock is chrome and locks both drawers.
- Drawers have full extension ball-bearing slides.
- Drawer interiors are black.
- File drawer includes side-to-side hanging file bars.
- Optional drawer pulls include Ellipse, Radius, Taper, Crescent, Linear, Classic, and J-Pull.
  - Ellipse pull available in non-metallic trim colors only.
  - Radius pull available in metallic trim colors only.
  - Taper pull color matches painted steel back, bottom, and shelf.
  - J-Pull trim color matches painted steel front.
  - Crescent, Linear and Classic pulls are brushed nickel finish.
- Each open section has 3 shelf mounting locations; hole locations are in 1 1/4" (32mm) increments, with the lowest location 10 1/4" (260mm) above bottom panel.
- Shelves are 3/4" (19mm) thick and 16 1/2" (419mm) deep.
- Interior height of open section is 17 1/2" (445mm).
- Glides provide 1" (25mm) adjustment range.
- Ships fully assembled.

## Specification Tips

- Credenza units are not field retrofittable.
- Designed to be used with Haworth's Integrated Palette; UniGroup Too, PREMISE, Reside Desking, and Intuity Bench.
- 72" (1829mm) wide credenza is freestanding and does not require a counterweight.
- File drawer does not accommodate the File Drawer Insert.
- Bookcase section with shelf is open at the back unless the credenza is specified with a full back panel.
- If credenza is used in a nested application, verify clearance heights.

**Notes:** The following products can be separately specified and field installed:

- Grommet
- File/Storage Cushion
- Adjustable Shelf
- Drawer Liner
- Recycle Bin
- Personal Tray
- Front-to-Back File Bars

For additional credenza options/configurations, see the A Series Storage Price List.

## To Order, Specify:

1) Product number, including:

### 1 Back Panel Type:

- C** Storage Back Panel
- F** Full Back Panel, add **\$54.63** list

### 2 Base Type:

- S** Standard Base
- T** Base with Toe Kick, add **\$30.15** list

### 3 Pull (see side bar):

### 4 Lock Option:

- N** No Lock
- Y** Lock, add **\$26.78** list

- Laminate color for top and end panels.
- Edge trim color for top and end panels.
- Trim color for drawer fronts.
- Trim color for back/bottom/shelf.
- Trim color for pull (Ellipse and Radius only).

# 1.5H Credenzas with Drawers





72" Wide — Laminate Case with Steel Front

Height	Depth	Width	Pull	Number	①②③④	Front - Steel Trim A		Front - Steel Trim B	
						Shelf & Back - Steel Trim A	Steel Trim B	Shelf & Back - Steel Trim A	Steel Trim B
Case — Laminate A									
Left-Hand									
36”(914mm) Box/File Left/36”(914mm) Open Right									
21”(533mm)	18”(457mm)	72”(1829mm)	1, J	GCLS-2172-DXN	<div></div> <div></div> <div></div> <div></div>	\$1392.75	\$1400.78	\$1423.97	\$1432.00
			2, 3	GCLS-2172-DXN	<div></div> <div></div> <div></div> <div></div>	1446.31	1454.34	1477.53	1485.56
			7, 8, 9	GCLS-2172-DXN	<div></div> <div></div> <div></div> <div></div>	1457.03	1465.06	1488.25	1496.28
Right-Hand									
36”(914mm) Open Left/36”(914mm) Box/File Right									
21”(533mm)	18”(457mm)	72”(1829mm)	1, J	GCLS-2172-XDN	<div></div> <div></div> <div></div> <div></div>	\$1392.75	\$1400.78	\$1423.97	\$1432.00
			2, 3	GCLS-2172-XDN	<div></div> <div></div> <div></div> <div></div>	1446.31	1454.34	1477.53	1485.56
			7, 8, 9	GCLS-2172-XDN	<div></div> <div></div> <div></div> <div></div>	1457.03	1465.06	1488.25	1496.28
Non-Handed									
18”(457mm) Open Left/36”(914mm) Box/File Center/18”(457mm) Open Right									
21”(533mm)	18”(457mm)	72”(1829mm)	1, J	GCLS-2172-TDT	<div></div> <div></div> <div></div> <div></div>	\$1424.89	\$1432.92	\$1456.11	\$1464.14
			2, 3	GCLS-2172-TDT	<div></div> <div></div> <div></div> <div></div>	1478.45	1486.48	1509.67	1517.70
			7, 8, 9	GCLS-2172-TDT	<div></div> <div></div> <div></div> <div></div>	1489.17	1497.20	1520.39	1528.42
Case — Laminate B									
Left-Hand									
36”(914mm) Box/File Left/36”(914mm) Open Right									
21”(533mm)	18”(457mm)	72”(1829mm)	1, J	GCLS-2172-DXN	<div></div> <div></div> <div></div> <div></div>	\$1463.09	\$1471.12	\$1494.31	\$1502.34
			2, 3	GCLS-2172-DXN	<div></div> <div></div> <div></div> <div></div>	1516.65	1524.68	1547.87	1555.90
			7, 8, 9	GCLS-2172-DXN	<div></div> <div></div> <div></div> <div></div>	1527.37	1535.40	1558.59	1566.62
Right-Hand									
36”(914mm) Open Left/36”(914mm) Box/File Right									
21”(533mm)	18”(457mm)	72”(1829mm)	1, J	GCLS-2172-XDN	<div></div> <div></div> <div></div> <div></div>	\$1463.09	\$1471.12	\$1494.31	\$1502.34
			2, 3	GCLS-2172-XDN	<div></div> <div></div> <div></div> <div></div>	1516.65	1524.68	1547.87	1555.90
			7, 8, 9	GCLS-2172-XDN	<div></div> <div></div> <div></div> <div></div>	1527.37	1535.40	1558.59	1566.62
Non-Handed									
18”(457mm) Open Left/36”(914mm) Box/File Center/18”(457mm) Open Right									
21”(533mm)	18”(457mm)	72”(1829mm)	1, J	GCLS-2172-TDT	<div></div> <div></div> <div></div> <div></div>	\$1495.23	\$1503.26	\$1526.45	\$1534.48
			2, 3	GCLS-2172-TDT	<div></div> <div></div> <div></div> <div></div>	1548.79	1556.82	1580.01	1588.04
			7, 8, 9	GCLS-2172-TDT	<div></div> <div></div> <div></div> <div></div>	1559.51	1567.54	1590.73	1598.76


# 1.5H Credenzas with Hinged Doors

48" Wide — Laminate Case with Steel Front

48" Wide  
Left-hand



GCLS-2148



### No Pulls

Touch Latch Doors = (N)

## Features

- Includes:
  - Laminate top, end panels, and interior vertical divider.
  - Painted steel doors, back panel, bottom panel, and one adjustable shelf for each open section.
- 1 3/16" (30mm) thick laminate top has 3mm edgeband on front and back, 1mm edgeband on the sides.
- Laminate end panels and interior vertical dividers have 1mm edgeband on all sides.
- Available with storage back panel or full back panel:
  - Storage back panel provides enclosure to the hinged door section only.
  - Full back panel provides enclosure along the entire back.
- Available with a standard side panel base, or base with toe kick panel:
  - Standard base; credenza end panels extend past the bottom panel to the floor, leaving 1 3/4" (30mm) open space below the bottom panel.
  - Base with toe kick; encloses the open space below the bottom panel (front only).
- Hinged doors feature full access hinges, allowing the doors to open 100°.
- Available with or without lock; single lock is chrome and locks both doors; lock is located in upper left corner of right-hand door.
- Optional door pulls include Ellipse, Radius, Taper, Crescent, Linear, Classic, and No Pull touch latch.
  - Ellipse pull available in non-metallic trim colors only.
  - Radius pull available in metallic trim colors only.
  - Taper pull color matches painted steel back, bottom, and shelf.
  - Crescent, Linear and Classic pulls are brushed nickel finish.
  - Pulls are oriented vertically on the doors.
  - No Pull touch latch option has a touch latch on the right-hand door; left-hand door opens when right-hand door is open.
- Each open section has three shelf mounting locations; hole locations are in 1 1/4" (32mm) increments, with the lowest location 10 1/4" (260mm) above bottom panel.
- Shelves are 3/4" (19mm) thick and 16 1/2" (419mm) deep.
- Interior height of open section is 17 1/2" (445mm).
- Glides provide 1" (25mm) adjustment range.
- Ships fully assembled.

## Specification Tips

- Credenza units are not field retrofitable.
- Designed to be used with Haworth's Integrated Palette; UniGroup Too, PREMISE, Reside Desking, and Intuity Bench.
- Credenza is freestanding and does not require a counterweight.
- Bookcase section with shelf is open at the back unless the credenza is specified with a full back panel.
- Accommodates binder height storage.
- Hinged door storage section does not accept separately specified shelves.
- If credenza is used in a nested application, verify clearance heights.

**Notes:** The following products can be separately specified and field installed:

- Grommet
- File/Storage Cushion
- Adjustable Shelf

For additional credenza options/configurations, see the A Series Storage Price List.

## To Order, Specify:

1) Product number, including:

### 1 Back Panel Type:

- C** Storage Back Panel
- F** Full Back Panel, add **\$29.92** list

### 2 Base Type:

- S** Standard Base
- T** Base with Toe Kick, add **\$17.19** list

### 3 Pull (see side bar):

### 4 Lock Option:

- N** No Lock
- Y** Lock, add **\$26.78** list

2) Laminate color for top and end panels.

3) Edge trim color for top and end panels.

4) Trim color for doors.

5) Trim color for back/bottom/shelf.

6) Trim color for pull (Ellipse and Radius only).

# 1.5H Credenzas with Hinged Doors






48" Wide — Laminate Case with Steel Front

Height	Depth	Width	Pull	Number	①	②	③	④	Front - Steel Trim A		Front - Steel Trim B	
									Shelf & Back - Steel Trim A	Steel Trim B	Shelf & Back - Steel Trim A	Steel Trim B
Case — Laminate A												
Left-Hand												
24”(610mm) Doors Left/24”(610mm) Open Right												
21”(533mm)	18”(457mm)	48”(1219mm)	2, 3	GCLS-2148-HUN					\$1061.03	\$1069.06	\$1079.29	\$1087.32
			7, 8, 9	GCLS-2148-HUN					1071.75	1079.78	1090.01	1098.04
			N	GCLS-2148-HUN			N		1007.47	1015.50	1025.73	1033.76
30”(762mm) Doors Left/18”(457mm) Open Right												
21”(533mm)	18”(457mm)	48”(1219mm)	1	GCLS-2148-ITN			1		\$1017.13	\$1025.16	\$1035.39	\$1043.42
			2, 3	GCLS-2148-ITN					1070.69	1078.72	1088.95	1096.98
			7, 8, 9	GCLS-2148-ITN					1081.41	1089.44	1099.67	1107.70
			N	GCLS-2148-ITN			N		1017.13	1025.16	1035.39	1043.42
Right-Hand												
24”(610mm) Open Left/24”(610mm) Doors Right												
21”(533mm)	18”(457mm)	48”(1219mm)	2, 3	GCLS-2148-UHN					\$1061.03	\$1069.06	\$1079.29	\$1087.32
			7, 8, 9	GCLS-2148-UHN					1071.75	1079.78	1090.01	1098.04
			N	GCLS-2148-UHN			N		1007.47	1015.50	1025.73	1033.76
18”(457mm) Open Left/30”(762mm) Doors Right												
21”(533mm)	18”(457mm)	48”(1219mm)	1	GCLS-2148-TIN			1		\$1017.13	\$1025.16	\$1035.39	\$1043.42
			2, 3	GCLS-2148-TIN					1070.69	1078.72	1088.95	1096.98
			7, 8, 9	GCLS-2148-TIN					1081.41	1089.44	1099.67	1107.70
			N	GCLS-2148-TIN			N		1017.13	1025.16	1035.39	1043.42
Case — Laminate B												
Left-Hand												
24”(610mm) Doors Left/24”(610mm) Open Right												
21”(533mm)	18”(457mm)	48”(1219mm)	2, 3	GCLS-2148-HUN					\$1125.61	\$1133.64	\$1143.87	\$1151.90
			7, 8, 9	GCLS-2148-HUN					1136.33	1144.36	1154.59	1162.62
			N	GCLS-2148-HUN			N		1072.05	1080.08	1090.31	1098.34
30”(762mm) Doors Left/18”(457mm) Open Right												
21”(533mm)	18”(457mm)	48”(1219mm)	1	GCLS-2148-ITN			1		\$1081.71	\$1089.74	\$1099.97	\$1108.00
			2, 3	GCLS-2148-ITN					1135.27	1143.30	1153.53	1161.56
			7, 8, 9	GCLS-2148-ITN					1145.99	1154.02	1164.25	1172.28
			N	GCLS-2148-ITN			N		1081.71	1089.74	1099.97	1108.00
Right-Hand												
24”(610mm) Open Left/24”(610mm) Doors Right												
21”(533mm)	18”(457mm)	48”(1219mm)	2, 3	GCLS-2148-UHN					\$1125.61	\$1133.64	\$1143.87	\$1151.90
			7, 8, 9	GCLS-2148-UHN					1136.33	1144.36	1154.59	1162.62
			N	GCLS-2148-UHN			N		1072.05	1080.08	1090.31	1098.34
18”(457mm) Open Left/30”(762mm) Doors Right												
21”(533mm)	18”(457mm)	48”(1219mm)	1	GCLS-2148-TIN			1		\$1081.71	\$1089.74	\$1099.97	\$1108.00
			2, 3	GCLS-2148-TIN					1135.27	1143.30	1153.53	1161.56
			7, 8, 9	GCLS-2148-TIN					1145.99	1154.02	1164.25	1172.28
			N	GCLS-2148-TIN			N		1081.71	1089.74	1099.97	1108.00


This page intentionally blank

# 1.5H Credenzas with Hinged Doors

60" Wide — Laminate Case with Steel Front

60" Wide  
Left-hand

GCLS-2160



### 3 No Pulls

Touch Latch Doors = (N)

## Features

- Includes:
  - Laminate top, end panels, and interior vertical divider(s).
  - Painted steel doors, back panel, bottom panel, and one adjustable shelf for each open section.
- 1 3/16" (30mm) thick laminate top has 3mm edgeband on front and back, 1mm edgeband on the sides.
- Laminate end panels and interior vertical dividers have 1mm edgeband on all sides.
- Available with storage back panel or full back panel:
  - Storage back panel provides enclosure to the hinged door section only.
  - Full back panel provides enclosure along the entire back.
- Available with a standard side panel base, or base with toe kick panel:
  - Standard base; credenza end panels extend past the bottom panel to the floor, leaving 1 3/4" (30mm) open space below the bottom panel.
  - Base with toe kick; encloses the open space below the bottom panel (front only).
- Hinged doors feature full access hinges, allowing the doors to open 100°.
- Available with or without lock; single lock is chrome and locks both doors; lock is located in upper left corner of right-hand door.
- Optional door pulls include Ellipse, Radius, Taper, Crescent, Linear, Classic, and No Pull touch latch.
  - Ellipse pull available in non-metallic trim colors only.
  - Radius pull available in metallic trim colors only.
  - Taper pull color matches painted steel back, bottom, and shelf.
  - Crescent, Linear and Classic pulls are brushed nickel finish.
  - Pulls are oriented vertically on the doors.
  - No Pull touch latch option has a touch latch on the right-hand door; left-hand door opens when right-hand door is open.
- Each open section has three shelf mounting locations; hole locations are in 1 1/4" (32mm) increments, with the lowest location 10 1/4" (260mm) above bottom panel.
- Shelves are 3/4" (19mm) thick and 16 1/2" (419mm) deep.
- Interior height of open section is 17 1/2" (445mm).
- Glides provide 1" (25mm) adjustment range.
- Ships fully assembled.

## Specification Tips

- Credenza units are not field retrofitable.
- Designed to be used with Haworth's Integrated Palette; UniGroup Too, PREMISE, Reside Desking, and Intuity Bench.
- Credenza is freestanding and does not require a counterweight.
- Bookcase section with shelf is open at the back unless the credenza is specified with a full back panel.
- Accommodates binder height storage.
- Hinged door storage section does not accept separately specified shelves.
- If credenza is used in a nested application, verify clearance heights.

**Notes:** The following products can be separately specified and field installed:

- Grommet
- File/Storage Cushion
- Adjustable Shelf

For additional credenza options/configurations, see the A Series Storage Price List.

## To Order, Specify:

1) Product number, including:

### 1 Back Panel Type:

- C** Storage Back Panel
- F** Full Back Panel, add **\$41.78** list

### 2 Base Type:

- S** Standard Base
- T** Base with Toe Kick, add **\$23.67** list

### 3 Pull (see side bar):

### 4 Lock Option:

- N** No Lock
- Y** Lock, add **\$26.78** list

2) Laminate color for top and end panels.

3) Edge trim color for top and end panels.

4) Trim color for doors.

5) Trim color for back/bottom/shelf.

6) Trim color for pull (Ellipse and Radius only).

1.5H Credenzas with Hinged Doors

60" Wide — Laminate Case with Steel Front

Height	Depth	Width	Pull	Number	①②③④	Front - Steel Trim A		Front - Steel Trim B	
						Shelf & Back - Steel Trim A	Trim B	Shelf & Back - Steel Trim A	Trim B
Case — Laminate A									
Left-Hand									
30”(762mm) Doors Left/30”(762mm) Open Right									
21”(533mm)	18”(457mm)	60”(1524mm)	1	GCLS-2160-IVN	<div><div></div><div></div><div></div><div></div></div> 1	\$1051.81	\$1059.84	\$1076.55	\$1084.58
			2, 3	GCLS-2160-IVN	<div><div></div><div></div><div></div><div></div></div>	1105.37	1113.40	1130.11	1138.14
			7, 8, 9	GCLS-2160-IVN	<div><div></div><div></div><div></div><div></div></div>	1116.09	1124.12	1140.83	1148.86
			N	GCLS-2160-IVN	<div><div></div><div></div><div></div><div></div></div> N	1051.81	1059.84	1076.55	1084.58
36”(914mm) Doors Left/24”(610mm) Open Right									
21”(533mm)	18”(457mm)	60”(1524mm)	1	GCLS-2160-JUN	<div><div></div><div></div><div></div><div></div></div> 1	\$1061.47	\$1069.50	\$1086.21	\$1094.24
			2, 3	GCLS-2160-JUN	<div><div></div><div></div><div></div><div></div></div>	1115.03	1123.06	1139.77	1147.80
			7, 8, 9	GCLS-2160-JUN	<div><div></div><div></div><div></div><div></div></div>	1125.75	1133.78	1150.49	1158.52
			N	GCLS-2160-JUN	<div><div></div><div></div><div></div><div></div></div> N	1061.47	1069.50	1086.21	1094.24
42”(1067mm) Doors Left/18”(457mm) Open Right									
21”(533mm)	18”(457mm)	60”(1524mm)	1	GCLS-2160-LTN	<div><div></div><div></div><div></div><div></div></div> 1	\$1071.13	\$1079.16	\$1095.87	\$1103.90
			2, 3	GCLS-2160-LTN	<div><div></div><div></div><div></div><div></div></div>	1124.69	1132.72	1149.43	1157.46
			7, 8, 9	GCLS-2160-LTN	<div><div></div><div></div><div></div><div></div></div>	1135.41	1143.44	1160.15	1168.18
			N	GCLS-2160-LTN	<div><div></div><div></div><div></div><div></div></div> N	1071.13	1079.16	1095.87	1103.90
Right-Hand									
30”(762mm) Open Left/30”(762mm) Doors Right									
21”(533mm)	18”(457mm)	60”(1524mm)	1	GCLS-2160-VIN	<div><div></div><div></div><div></div><div></div></div> 1	\$1051.81	\$1059.84	\$1076.55	\$1084.58
			2, 3	GCLS-2160-VIN	<div><div></div><div></div><div></div><div></div></div>	1105.37	1113.40	1130.11	1138.14
			7, 8, 9	GCLS-2160-VIN	<div><div></div><div></div><div></div><div></div></div>	1116.09	1124.12	1140.83	1148.86
			N	GCLS-2160-VIN	<div><div></div><div></div><div></div><div></div></div> N	1051.81	1059.84	1076.55	1084.58
24”(610mm) Open Left/36”(914mm) Doors Right									
21”(533mm)	18”(457mm)	60”(1524mm)	1	GCLS-2160-UJN	<div><div></div><div></div><div></div><div></div></div> 1	\$1061.47	\$1069.50	\$1086.21	\$1094.24
			2, 3	GCLS-2160-UJN	<div><div></div><div></div><div></div><div></div></div>	1115.03	1123.06	1139.77	1147.80
			7, 8, 9	GCLS-2160-UJN	<div><div></div><div></div><div></div><div></div></div>	1125.75	1133.78	1150.49	1158.52
			N	GCLS-2160-UJN	<div><div></div><div></div><div></div><div></div></div> N	1061.47	1069.50	1086.21	1094.24
18”(457mm) Open Left/42”(1067mm) Doors Right									
21”(533mm)	18”(457mm)	60”(1524mm)	1	GCLS-2160-TLN	<div><div></div><div></div><div></div><div></div></div> 1	\$1071.13	\$1079.16	\$1095.87	\$1103.90
			2, 3	GCLS-2160-TLN	<div><div></div><div></div><div></div><div></div></div>	1124.69	1132.72	1149.43	1157.46
			7, 8, 9	GCLS-2160-TLN	<div><div></div><div></div><div></div><div></div></div>	1135.41	1143.44	1160.15	1168.18
			N	GCLS-2160-TLN	<div><div></div><div></div><div></div><div></div></div> N	1071.13	1079.16	1095.87	1103.90
Non-Handed									
15”(381mm) Open Left/30”(762mm) Doors Center/15”(381mm) Open Right									
21”(533mm)	18”(457mm)	60”(1524mm)	1	GCLS-2160-RIR	<div><div></div><div></div><div></div><div></div></div> 1	\$1083.95	\$1091.98	\$1108.69	\$1116.72
			2, 3	GCLS-2160-RIR	<div><div></div><div></div><div></div><div></div></div>	1137.51	1145.54	1162.25	1170.28
			7, 8, 9	GCLS-2160-RIR	<div><div></div><div></div><div></div><div></div></div>	1148.23	1156.26	1172.97	1181.00
			N	GCLS-2160-RIR	<div><div></div><div></div><div></div><div></div></div> N	1083.95	1091.98	1108.69	1116.72

# 1.5H Credenzas with Hinged Doors

60" Wide — Laminate Case with Steel Front




Height	Depth	Width	Pull	Number	①②③④	Front - Steel Trim A		Front - Steel Trim B	
						Shelf & Back - Steel Trim A	Trim B	Shelf & Back - Steel Trim A	Trim B
Case — Laminate B									
Left-Hand									
30”(762mm) Doors Left/30”(762mm) Open Right									
21”(533mm)	18”(457mm)	60”(1524mm)	1	GCLS-2160-IVN	<div><div></div><div></div><div></div><div></div></div> 1	\$1119.27	\$1127.30	\$1144.01	\$1152.04
			2, 3	GCLS-2160-IVN	<div><div></div><div></div><div></div><div></div></div>	1172.83	1180.86	1197.57	1205.60
			7, 8, 9	GCLS-2160-IVN	<div><div></div><div></div><div></div><div></div></div>	1183.55	1191.58	1208.29	1216.32
			N	GCLS-2160-IVN	<div><div></div><div></div><div></div><div></div></div> N	1119.27	1127.30	1144.01	1152.04
36”(914mm) Doors Left/24”(610mm) Open Right									
21”(533mm)	18”(457mm)	60”(1524mm)	1	GCLS-2160-JUN	<div><div></div><div></div><div></div><div></div></div> 1	\$1128.93	\$1136.96	\$1153.67	\$1161.70
			2, 3	GCLS-2160-JUN	<div><div></div><div></div><div></div><div></div></div>	1182.49	1190.52	1207.23	1215.26
			7, 8, 9	GCLS-2160-JUN	<div><div></div><div></div><div></div><div></div></div>	1193.21	1201.24	1217.95	1225.98
			N	GCLS-2160-JUN	<div><div></div><div></div><div></div><div></div></div> N	1128.93	1136.96	1153.67	1161.70
42”(1067mm) Doors Left/18”(457mm) Open Right									
21”(533mm)	18”(457mm)	60”(1524mm)	1	GCLS-2160-LTN	<div><div></div><div></div><div></div><div></div></div> 1	\$1138.59	\$1146.62	\$1163.33	\$1171.36
			2, 3	GCLS-2160-LTN	<div><div></div><div></div><div></div><div></div></div>	1192.15	1200.18	1216.89	1224.92
			7, 8, 9	GCLS-2160-LTN	<div><div></div><div></div><div></div><div></div></div>	1202.87	1210.90	1227.61	1235.64
			N	GCLS-2160-LTN	<div><div></div><div></div><div></div><div></div></div> N	1138.59	1146.62	1163.33	1171.36
Right-Hand									
30”(762mm) Open Left/30”(762mm) Doors Right									
21”(533mm)	18”(457mm)	60”(1524mm)	1	GCLS-2160-VIN	<div><div></div><div></div><div></div><div></div></div> 1	\$1119.27	\$1127.30	\$1144.01	\$1152.04
			2, 3	GCLS-2160-VIN	<div><div></div><div></div><div></div><div></div></div>	1172.83	1180.86	1197.57	1205.60
			7, 8, 9	GCLS-2160-VIN	<div><div></div><div></div><div></div><div></div></div>	1183.55	1191.58	1208.29	1216.32
			N	GCLS-2160-VIN	<div><div></div><div></div><div></div><div></div></div> N	1119.27	1127.30	1144.01	1152.04
24”(610mm) Open Left/36”(914mm) Doors Right									
21”(533mm)	18”(457mm)	60”(1524mm)	1	GCLS-2160-UJN	<div><div></div><div></div><div></div><div></div></div> 1	\$1128.93	\$1136.96	\$1153.67	\$1161.70
			2, 3	GCLS-2160-UJN	<div><div></div><div></div><div></div><div></div></div>	1182.49	1190.52	1207.23	1215.26
			7, 8, 9	GCLS-2160-UJN	<div><div></div><div></div><div></div><div></div></div>	1193.21	1201.24	1217.95	1225.98
			N	GCLS-2160-UJN	<div><div></div><div></div><div></div><div></div></div> N	1128.93	1136.96	1153.67	1161.70
18”(457mm) Open Left/42”(1067mm) Doors Right									
21”(533mm)	18”(457mm)	60”(1524mm)	1	GCLS-2160-TLN	<div><div></div><div></div><div></div><div></div></div> 1	\$1138.59	\$1146.62	\$1163.33	\$1171.36
			2, 3	GCLS-2160-TLN	<div><div></div><div></div><div></div><div></div></div>	1192.15	1200.18	1216.89	1224.92
			7, 8, 9	GCLS-2160-TLN	<div><div></div><div></div><div></div><div></div></div>	1202.87	1210.90	1227.61	1235.64
			N	GCLS-2160-TLN	<div><div></div><div></div><div></div><div></div></div> N	1138.59	1146.62	1163.33	1171.36
Non-Handed									
15”(381mm) Open Left/30”(762mm) Doors Center/15”(381mm) Open Right									
21”(533mm)	18”(457mm)	60”(1524mm)	1	GCLS-2160-RIR	<div><div></div><div></div><div></div><div></div></div> 1	\$1151.41	\$1159.44	\$1176.15	\$1184.18
			2, 3	GCLS-2160-RIR	<div><div></div><div></div><div></div><div></div></div>	1204.97	1213.00	1229.71	1237.74
			7, 8, 9	GCLS-2160-RIR	<div><div></div><div></div><div></div><div></div></div>	1215.69	1223.72	1240.43	1248.46
			N	GCLS-2160-RIR	<div><div></div><div></div><div></div><div></div></div> N	1151.41	1159.44	1176.15	1184.18





This page intentionally blank

# 1.5H Credenzas with Hinged Doors

72" Wide — Laminate Case with Steel Front



GCLS-2172



## Features

- Includes:
  - Laminate top, end panels, and interior vertical divider(s).
  - Painted steel doors, back panel, bottom panel, and one adjustable shelf for each open section.
- 1 3/16" (30mm) thick laminate top has 3mm edgeband on front and back, 1mm edgeband on the sides.
- Laminate end panels and interior vertical dividers have 1mm edgeband on all sides.
- Available with storage back panel or full back panel:
  - Storage back panel provides enclosure to the hinged door section only.
  - Full back panel provides enclosure along the entire back.
- Available with a standard side panel base, or base with toe kick panel:
  - Standard base; credenza end panels extend past the bottom panel to the floor, leaving 1 3/4" (30mm) open space below the bottom panel.
  - Base with toe kick; encloses the open space below the bottom panel (front only).
- Hinged doors feature full access hinges, allowing the doors to open 100°.
- Available with or without lock; single lock is chrome and locks both doors; lock is located in upper left corner of right-hand door.
- Optional door pulls include Ellipse, Radius, Taper, Crescent, Linear, Classic, and No Pull touch latch.
  - Ellipse pull available in non-metallic trim colors only.
  - Radius pull available in metallic trim colors only.
  - Taper pull color matches painted steel back, bottom, and shelf.
  - Crescent, Linear and Classic pulls are brushed nickel finish.
  - Pulls are oriented vertically on the doors.
  - No Pull touch latch option has a touch latch on the right-hand door; left-hand door opens when right-hand door is open.
- Each open section has three shelf mounting locations; hole locations are in 1 1/4" (32mm) increments, with the lowest location 10 1/4" (260mm) above bottom panel.
- Shelves are 3/4" (19mm) thick and 16 1/2" (419mm) deep.
- Interior height of open section is 17 1/2" (445mm).
- Glides provide 1" (25mm) adjustment range.
- Ships fully assembled.

## Specification Tips

- Credenza units are not field retrofitable.
- Designed to be used with Haworth's Integrated Palette; UniGroup Too, PREMISE, Reside Desking, and Intuity Bench.
- Credenza is freestanding and does not require a counterweight.
- Bookcase section with shelf is open at the back unless the credenza is specified with a full back panel.
- Accommodates binder height storage.
- Hinged door storage section does not accept separately specified shelves.
- If credenza is used in a nested application, verify clearance heights.

**Notes:** The following products can be separately specified and field installed:

- Grommet
- File/Storage Cushion
- Adjustable Shelf

For additional credenza options/configurations, see the A Series Storage Price List.

## To Order, Specify:

1) Product number, including:

### 1 Back Panel Type:

- C** Storage Back Panel
- F** Full Back Panel, add **\$54.63** list

### 2 Base Type:

- S** Standard Base
- T** Base with Toe Kick, add **\$30.15** list

### 3 Pull (see side bar):

### 4 Lock Option:

- N** No Lock
- Y** Lock, add **\$26.78** list

2) Laminate color for top and end panels.

3) Edge trim color for top and end panels.

4) Trim color for doors.

5) Trim color for back/bottom/shelf.

6) Trim color for pull (Ellipse and Radius only).

1.5H Credenzas with Hinged Doors

72" Wide — Laminate Case with Steel Front

Height	Depth	Width	Pull	Number	①②③④				Front - Steel Trim A		Front - Steel Trim B	
									Shelf & Back - Steel Trim A	Steel Trim B	Shelf & Back - Steel Trim A	Steel Trim B
Case — Laminate A												
Left-Hand												
36”(914mm) Doors Left/36”(914mm) Open Right												
21”(533mm)	18”(457mm)	72”(1829mm)	1	GCLS-2172-JXN			1		\$1096.15	\$1104.18	\$1127.37	\$1135.40
			2, 3	GCLS-2172-JXN					1149.71	1157.74	1180.93	1188.96
			7, 8, 9	GCLS-2172-JXN					1160.43	1168.46	1191.65	1199.68
			N	GCLS-2172-JXN			N		1096.15	1104.18	1127.37	1135.40
42”(1067mm) Doors Left/30”(762mm) Open Right												
21”(533mm)	18”(457mm)	72”(1829mm)	1	GCLS-2172-LVN			1		\$1105.81	\$1113.84	\$1137.03	\$1145.06
			2, 3	GCLS-2172-LVN					1159.37	1167.40	1190.59	1198.62
			7, 8, 9	GCLS-2172-LVN					1170.09	1178.12	1201.31	1209.34
			N	GCLS-2172-LVN			N		1105.81	1113.84	1137.03	1145.06
Right-Hand												
36”(914mm) Open Left/36”(914mm) Doors Right												
21”(533mm)	18”(457mm)	72”(1829mm)	1	GCLS-2172-XJN			1		\$1096.15	\$1104.18	\$1127.37	\$1135.40
			2, 3	GCLS-2172-XJN					1149.71	1157.74	1180.93	1188.96
			7, 8, 9	GCLS-2172-XJN					1160.43	1168.46	1191.65	1199.68
			N	GCLS-2172-XJN			N		1096.15	1104.18	1127.37	1135.40
30”(762mm) Open Left/42”(1067mm) Doors Right												
21”(533mm)	18”(457mm)	72”(1829mm)	1	GCLS-2172-VLN			1		\$1105.81	\$1113.84	\$1137.03	\$1145.06
			2, 3	GCLS-2172-VLN					1159.37	1167.40	1190.59	1198.62
			7, 8, 9	GCLS-2172-VLN					1170.09	1178.12	1201.31	1209.34
			N	GCLS-2172-VLN			N		1105.81	1113.84	1137.03	1145.06
Non-Handed												
18”(457mm) Open Left/36”(914mm) Doors Center/18”(457mm) Open Right												
21”(533mm)	18”(457mm)	72”(1829mm)	1	GCLS-2172-TJT			1		\$1128.29	\$1136.32	\$1159.51	\$1167.54
			2, 3	GCLS-2172-TJT					1181.85	1189.88	1213.07	1221.10
			7, 8, 9	GCLS-2172-TJT					1192.57	1200.60	1223.79	1231.82
			N	GCLS-2172-TJT			N		1128.29	1136.32	1159.51	1167.54


# 1.5H Credenzas with Hinged Doors

72" Wide — Laminate Case with Steel Front

Height	Depth	Width	Pull	Number	① ② ③ ④				Front - Steel Trim A Shelf & Back - Steel Trim A		Front - Steel Trim B Shelf & Back - Steel Trim B	
									Trim A	Trim B	Trim A	Trim B
Case — Laminate B												
Left-Hand												
36”(914mm) Doors Left/36”(914mm) Open Right												
21”(533mm)	18”(457mm)	72”(1829mm)	1	GCLS-2172-JXN			1		\$1166.49	\$1174.52	\$1197.71	\$1205.74
			2, 3	GCLS-2172-JXN					1220.05	1228.08	1251.27	1259.30
			7, 8, 9	GCLS-2172-JXN					1230.77	1238.80	1261.99	1270.02
			N	GCLS-2172-JXN			N		1166.49	1174.52	1197.71	1205.74
42”(1067mm) Doors Left/30”(762mm) Open Right												
21”(533mm)	18”(457mm)	72”(1829mm)	1	GCLS-2172-LVN			1		\$1176.15	\$1184.18	\$1207.37	\$1215.40
			2, 3	GCLS-2172-LVN					1229.71	1237.74	1260.93	1268.96
			7, 8, 9	GCLS-2172-LVN					1240.43	1248.46	1271.65	1279.68
			N	GCLS-2172-LVN			N		1176.15	1184.18	1207.37	1215.40
Right-Hand												
36”(914mm) Open Left/36”(914mm) Doors Right												
21”(533mm)	18”(457mm)	72”(1829mm)	1	GCLS-2172-XJN			1		\$1166.49	\$1174.52	\$1197.71	\$1205.74
			2, 3	GCLS-2172-XJN					1220.05	1228.08	1251.27	1259.30
			7, 8, 9	GCLS-2172-XJN					1230.77	1238.80	1261.99	1270.02
			N	GCLS-2172-XJN			N		1166.49	1174.52	1197.71	1205.74
30”(762mm) Open Left/42”(1067mm) Doors Right												
21”(533mm)	18”(457mm)	72”(1829mm)	1	GCLS-2172-VLN			1		\$1176.15	\$1184.18	\$1207.37	\$1215.40
			2, 3	GCLS-2172-VLN					1229.71	1237.74	1260.93	1268.96
			7, 8, 9	GCLS-2172-VLN					1240.43	1248.46	1271.65	1279.68
			N	GCLS-2172-VLN			N		1176.15	1184.18	1207.37	1215.40
Non-Handed												
18”(457mm) Open Left/36”(914mm) Doors Center/18”(457mm) Open Right												
21”(533mm)	18”(457mm)	72”(1829mm)	1	GCLS-2172-TJT			1		\$1198.63	\$1206.66	\$1229.85	\$1237.88
			2, 3	GCLS-2172-TJT					1252.19	1260.22	1283.41	1291.44
			7, 8, 9	GCLS-2172-TJT					1262.91	1270.94	1294.13	1302.16
			N	GCLS-2172-TJT			N		1198.63	1206.66	1229.85	1237.88


X Series Mobile Pedestals

Box/File — Mobile



JPMA-24

Pencil/Box/File — Mobile



JPMP-24


Features

- Includes steel pedestal with casters.
- Casters: Black; non-locking, 2 swivel (rear), 2 fixed (front).
- Pencil drawers include one pencil tray for each pedestal.
- Box drawers include one divider in each drawer.
- File drawers include one compressor in each drawer.
- Drawer interiors and accessories are black finish color.
- All drawers have full extension steel ball-bearing slides.
- Standard with lock.
- For lock options, refer to Lock Program Price List.
- Wood drawer front lockbar options include wood front with painted steel lockbar or wood front with wood lockbar.
- Optional drawer fronts include painted or wood.
- Wood drawer front with J-Pull: J-Pull trim color matches case trim color.
- Crescent, Linear and Classic pulls are available on painted steel or wood drawer fronts only.
- Optional drawer pulls include Ellipse, Radius, Taper, Crescent, Linear, Classic, J-Pull and Integral.
- Integral pull (G) available with painted steel fronts only.
- Ellipse pull available in non-Metallic trim colors only.
- Radius pull available in Metallic trim colors only.
- Taper, J-Pull and Integral pull trim color matches case trim color.
- Crescent, Linear and Classic pulls are brushed nickel finish.


Specification Tips

- When ordering a mobile ped and will be using a cushion top, specify **C** in the third option to designate that the mobile ped should come without a top. Order cushion top separately.
- Example:** JMPA-24-S1C.
- 23”(584mm) deep, box/file, mobile pedestal will not fully nest beneath a 24”(610mm) deep worksurface with a Utility Tray.


**2 Pull Styles**




**1** Ellipse (1)




**7** Crescent (7)




**2** Radius (2)




**8** Linear (8)




**3** Taper (3)




**9** Classic (9)



J-Pull (J)  
(Steel Fronts)



J-Pull (K)  
(Wood Fronts)



Integral (G)  
(Steel Fronts)

To Order, Specify:

Painted Drawer Fronts

- 1) Product number, including:

1 Drawer Front Style:

**S** Painted

2 Pull (see side bar)

- 2) Trim color for drawer fronts and case.
- 3) Trim color for pull (Ellipse and Radius only).
- Ellipse (Non-Metallic trim colors only)
  - Radius (Metallic trim colors only; upcharge for Metallic trim on pull is included in price.)
- 4) Trim color for lock plug.

Wood Drawer Fronts

- 1) Product number, including:

1 Lockbar Option:

























**W** Wood/steel lockbar

**R** Wood/wood lockbar, add **\$87.40** list


2 Pull (see side bar)


- 2) Trim color for case.
- 3) Trim color for pull (Ellipse and Radius only).
- Ellipse (Non-Metallic trim colors only)
  - Radius (Metallic trim colors only; upcharge for Metallic trim on pull is included in price.)
- 4) Wood finish for drawer fronts.
- 5) Trim color for lock plug.


## X Series Mobile Pedestals

Actual Height	Actual Depth	Actual Width	Description	Pull	Number ① ②	Painted Trim A	Trim B	Wood Group A Trim A	Wood Group A Trim B	Wood Group B Trim A	Wood Group B Trim B
21 1/2" (546mm)	17" (432mm)	15" (381mm)	Box/File	1, J, G	JPMA-18-  	\$597.56	\$645.63	N/A	N/A	N/A	N/A
				1	JPMA-18-  1	N/A	N/A	\$ 829.15	\$ 877.22	\$ 870.66	\$ 918.73
				K	JPMA-18-  K	N/A	N/A	960.25	1008.32	1001.76	1049.83
				2, 3	JPMA-18-  	652.18	700.25	883.77	931.84	925.28	973.35
				7, 8, 9	JPMA-18-  	665.30	713.37	896.89	944.96	938.40	986.47
21 1/2" (546mm)	23" (584mm)	15" (381mm)	Box/File	1, J, G	JPMA-24-  	\$624.87	\$681.68	N/A	N/A	N/A	N/A
				1	JPMA-24-  1	N/A	N/A	\$ 856.46	\$ 913.27	\$ 897.97	\$ 954.78
				K	JPMA-24-  K	N/A	N/A	987.56	1044.37	1029.07	1085.88
				2, 3	JPMA-24-  	679.49	736.30	911.08	967.89	952.59	1009.40
				7, 8, 9	JPMA-24-  	692.61	749.42	924.20	981.01	965.71	1022.52
24 1/2" (622mm)	17" (432mm)	15" (381mm)	Pencil/Box/File	1, J, G	JPMP-18-  	\$684.96	\$738.49	N/A	N/A	N/A	N/A
				1	JPMP-18-  1	N/A	N/A	\$ 984.28	\$1037.81	\$1018.15	\$1071.68
				K	JPMP-18-  K	N/A	N/A	1180.93	1234.46	1214.80	1268.33
				2, 3	JPMP-18-  	766.89	820.42	1066.21	1119.74	1100.08	1153.61
				7, 8, 9	JPMP-18-  	786.57	840.10	1085.89	1139.42	1119.76	1173.29

X Series Pedestal Accessories

 <div>JPTA-6 Class FP</div>	Height	Depth	Width	Number	Price
	1 1/4"(32mm)	5 1/2"(140mm)	12 7/8"(327mm)	JPTA-6	\$32.34
<b>Features</b> <ul style="list-style-type: none"><li>Includes one black plastic tray.</li><li>Suspends from sides of 6"(152mm) drawer and slides for drawer access.</li></ul>			<b>To Order, Specify:</b> <ol style="list-style-type: none"><li>Product number. (No finish specification required.)</li></ol>		

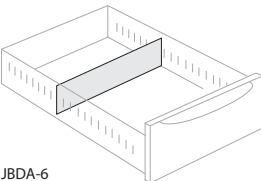 <div>JBDA-6 Class FP</div>	Height	Depth	Width	Number	Price
	3"(76mm)		12"(305mm)	JBDA-6	\$29.74
<b>Features</b> <ul style="list-style-type: none"><li>Includes six dividers.</li><li>Spans 6"(152mm) drawer from side-to-side.</li><li>Adjusts in 1"(25mm) increments from front to back of drawer.</li><li>Standard in black finish color only.</li></ul>			<b>To Order, Specify:</b> <ol style="list-style-type: none"><li>Product number. (No finish specification required.)</li></ol>		

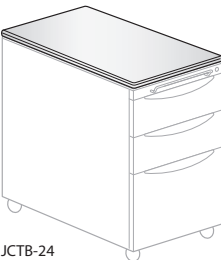 <div>JCTB-24 Class FM</div>	Height	Depth	Width	Number	Fabric Grade			
	A	B	C	D				
	1"(25mm)	17"(432mm)	15"(381mm)	JCTB-18	\$168.73	\$189.28	\$215.24	\$227.14
	1"(25mm)	23"(584mm)	15"(381mm)	JCTB-24	293.11	319.07	346.11	358.01
<b>Features</b> <ul style="list-style-type: none"><li>Includes cushion with fastener.</li><li>For use on 18"(457mm) and 24"(610mm) deep mobile pedestal and 24"(610mm) deep Tug pedestal.</li><li>Field installed.</li><li>COM yardage: 1 yard</li></ul>			<b>To Order, Specify:</b> <ol style="list-style-type: none"><li>Product number.</li><li>Fabric surface/color.</li></ol>					

## Specification Guide Intuity Benching



**This page intentionally left blank.**

# Table of Contents – Intuity™ Benching Specification Guide

## Building Intuity Benching in Five Easy Steps

Five Easy Steps .....56-61

## Statement of Line – Intuity Benching

Statement of Line .....64-68

## Product Details – Intuity Benching

Single Sided Starter Kit .....70

Single Sided Add-On Kit .....71

Double Sided Starter Kit .....72

Double Sided Add-On Kit .....73

120° Single Sided Starter Kit .....74

120° Double Sided Three Pack Starter Kit .....75

120° Double Sided Three Pack Add-on Kit.....76

Bench End Leg Kit and Bench End Worksurface.....77

Return Leg Kit and Return Worksurface .....78

Worksurfaces.....79-81

Starter and Add-On Kits.....82

Critical Dimensions for Planning

    Single Sided Benching Applications.....83

    Double Sided Benching Applications.....84

Accessories – Access Hatch Gap Filler, Accessory Rail, Bin and Mounting Brackets .....85

A Series Storage .....86

Electrical Components

    Infeed Harness .....87

    Base Feed Module: Architectural Concealed Hardwire Connection .....88

    Internal Power Base™ AI Base Feed .....89

    Top Feed.....90

    Utility Tray Power Retrofit Kit .....91

    Power Distribution Assembly (PDA) Connectivity .....92

    Jumpers – Power Connectors .....93

    Receptacles.....94

    Power Taps .....95

    Power Tap Brackets.....96

    Enhanced Power Module and Enhanced Power Module Brackets.....97

Cable Management – Cable Capacities.....98

Power Distribution for Hardwire Applications .....99

# Table of Contents – Intuity™ Benching Specification Guide

## Product Application – Intuity Benching

Planning Models .....	102
Single Sided Applications / Starter Kit .....	103
Single Sided Applications / Add-On Kit .....	104
Double Sided Applications / Starter Kit .....	105
Double Sided Applications / Add-On Kit .....	106
Planning an In-Line Single Sided Benching Application – Starter Kit, Add-On Kit and Worksurfaces.....	107
Planning an In-Line Double Sided Benching Application – Starter Kit, Add-On Kit and Worksurfaces.....	108
Column Leg Support / Double Sided Add-On Kit .....	109
Planning with Intuity Rectangular Worksurfaces .....	110
Planning Models – 120° Single Desk and 120° Benching Applications.....	111
Planning Models – Single-Sided 120° Benching .....	112
Single Sided Application / 120° Starter Kit .....	113
Double Sided Application / 120° Starter Kit .....	114
Double Sided 120° Application / Add-on Kit.....	115
Planning with Intuity Corner 120° Wrap-Around Worksurfaces .....	116
Planning with Storage and Accessories – Below Worksurface.....	117
Planning with Storage and Accessories – Above Worksurface .....	118-119
Planning with Return Kits .....	120-121
Planning with Bench Ends .....	122

## Technical Specifications – Intuity Benching

Technical Specifications.....	124-126
-------------------------------	---------

## Product Overview

### Building Intuity Benching in Five Easy Steps




## Building Intuity Benching in Five Easy Steps

### Overview


- There are two kit types, Starter Kit and Add-on Kit.
  - Starter Kit: May be used as a stand alone desk or may be the starting point for a benching application.
  - Add-On Kit: Never used as a stand alone desk; always used with a Starter Kit.
- In a benching application the end-of-run leg assembly included with the Starter Kit is relocated to the Add-On Kit.

See the chart below for an overview of what is included, not included or optional with each kit type.



For a comprehensive list of what is included with kits refer to the Product Detail section.



Starter Kits	SINGLE SIDED	120° SINGLE SIDED	DOUBLE SIDED	120° THREE PACK DOUBLE SIDED
Utility Tray(s)	• Included with Non-Powered, Powered and Hardwire options	• Included with Non-Powered, Powered and Hardwire options	• Optional for Non Powered • Included with Powered and Hardwire options	• Optional for Non Powered • Included with Powered and Hardwire options
Access Hatches	Optional	Not Available	Optional	Not Available
End-of-Run Leg Assembly (Straight or Angled Leg option)	Includes (2)	Includes (2)	Includes (2)	Includes (3)
Shared Leg Assembly (Straight or Angled Leg option)	Not Included	Not Included	Not Included	Not Included
Center Post	Not Included	Includes (1)	Not Included	Includes (3)



N/A



Add-On Kits	SINGLE SIDED	120° SINGLE SIDED (NOT AVAILABLE)	DOUBLE SIDED	120° THREE PACK DOUBLE SIDED
Utility Tray	• Included with Non-Powered, Powered and Hardwire options	N/A	• Optional for Non Powered • Included with Powered and Hardwire options	• Optional for Non Powered • Included with Powered and Hardwire options
Access Hatches	Optional	N/A	Optional	Not Available
End-of-Run Leg Assembly (Straight or Angled Leg option)	Not Included	N/A	Not Included	Includes (1)
Shared Leg Assembly (Straight or Angled Leg option)	Includes (1) (Straight or Angled)	N/A	Includes (1) (Straight, Angled or Column)	Includes (1) (Straight, Angled or Column)
Center Post	Not Included	N/A	Not Included	Includes (3)

# Building Intuity Benching in Five Easy Steps


## Step One: Specify a Starter Kit

Every Intuity Benching application begins with a Starter Kit.


- A Starter Kit is available single or double sided for an in-line or 120° benching application.
- A Starter Kit may be used as a stand alone desk or in a benching application. For a benching application one End-of-Run leg assembly will be relocated to the Add-On Kit.
- Includes fixed-height end-of-run leg assemblies (straight or angled), support beams, rails and worksurface support brackets.
- A 120° Starter Kit also includes center post leg(s) and a 120° corner cap.
- Access Hatch(s) which allow power and cable management access below the worksurface is optional for an in-line Starter Kit; not available for an 120° Starter Kit.
- An optional wireway provides power and cable management for a 120° corner, wrap-around worksurface.

### Starter Kit Power Options:

- A powered or hardwired, Single or Double Sided, Starter Kit includes below worksurface utility tray(s) and Power Distribution Assembly (PDA) or Assemblies.
- Below worksurface utility tray(s) is included with a non-powered Single Sided Starter Kit.
- Below worksurface utility tray(s) is optional for a non-powered Double Sided Starter Kit.
- Separately specify all electrical components for In and Out power path including receptacles.

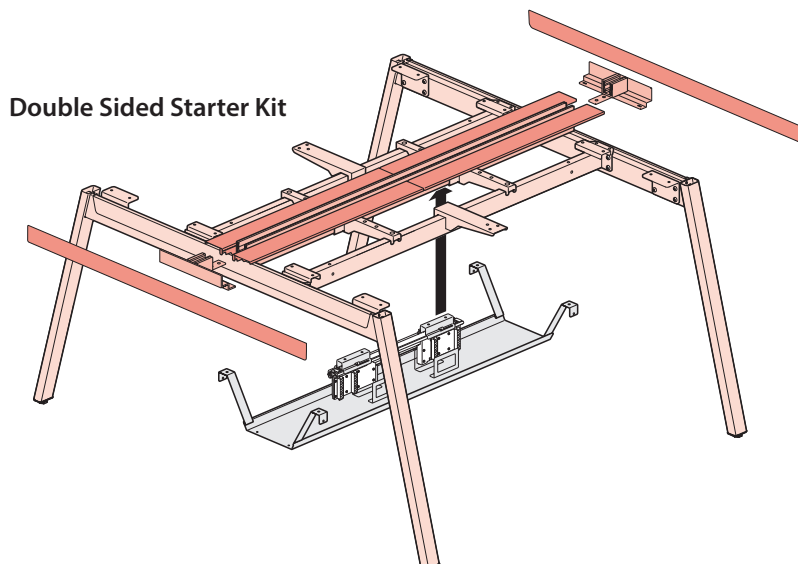

### Starter Kits




#### Single Sided

Includes:  
(2) End-of-Run Leg Assemblies



#### 120° Single Sided

Includes:  
(2) End-of-Run Legs Assemblies  
(1) Center Post Leg



#### Double Sided


Includes:  
(2) End-of-Run Legs Assemblies



#### 120° Double Sided Three Pack

Includes:  
(3) End-of-Run Leg Assemblies  
(3) Center Post Legs


### Leg Options




**Straight Leg Assembly**  
(Single Sided)



**Angled Leg Assembly**  
(Single Sided)



**Straight Leg Assembly**  
(Double Sided)



**Angled Leg Assembly**  
(Double Sided)

### Note

Knife edge worksurfaces require angled legs to accommodate the worksurface edge profile.

# Building Intuity Benching in Five Easy Steps


## Step Two: Specify Add-On Kit(s)

**An Add-On Kit(s) attaches to a Starter Kit to create an Intuity Benching Application.**


- An Add-on Kit(s) is available single or double sided for an in-line or 120° benching application.  
**Exception:** A 120° Add-On Kit is not available single sided.
- Includes fixed height shared leg assembly, support beams, rails and worksurface support brackets.  
**Exception:** A 120° Double Sided Three Pack Add-On Kit also includes an end-of-run leg assembly within the Leg Kit. Refer to the Price List for Leg Kit details.
- A 120° Add-On Kit also includes center (3) post legs and a 120° corner cap.
- Access Hatch(s) which allow power and cable management access below the worksurface is optional for an in-line Add-On Kit; not available for an 120° double sided Add-On Kit.
- An optional wireway provides power and cable management for a 120° corner, wrap-around worksurface.

### Add-On Kit Power Options:

- A powered or hardwired, Single or Double Sided, Add-On Kit includes below worksurface utility trays and Power Distribution Assemblies (PDA.)
- Below worksurface utility tray(s) is included with a non-powered Single Sided Add-On Kit.
- Below worksurface utility tray(s) is optional for a non-powered Double Sided Add-On Kit.
- Separately specify all electrical components for In and Out power path including receptacles.

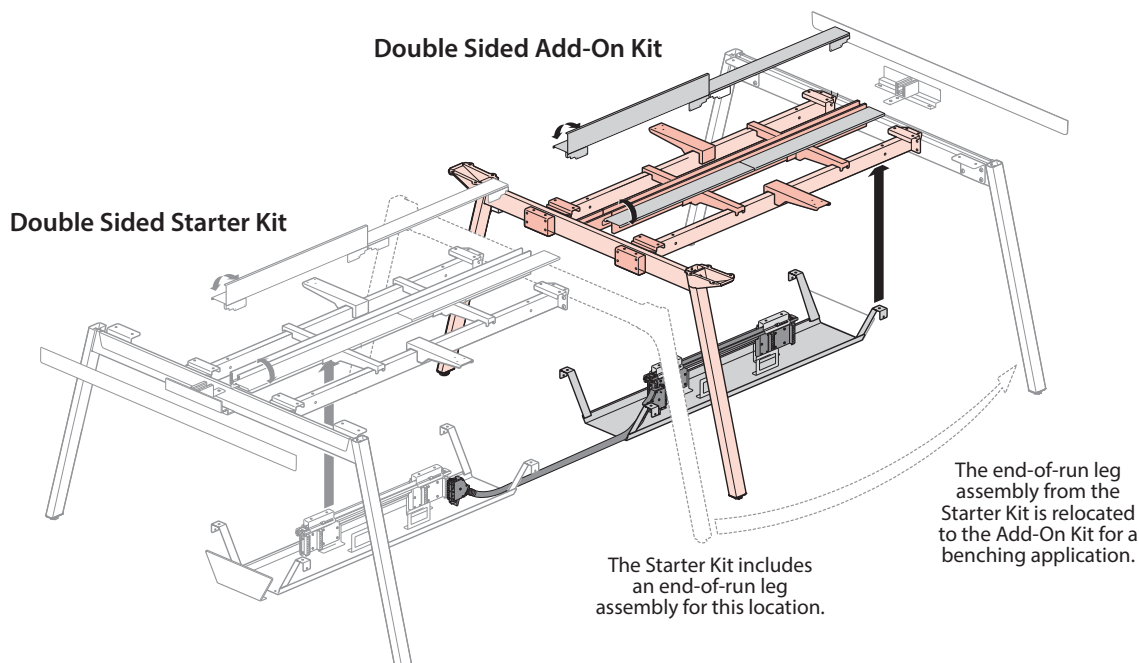


### Add-On Kits




**Single Sided**  
Includes:  
(1) Shared Leg Assembly

N/A

**120° Single Sided**  
Not Available as standard product




**Double Sided**  
Includes:  
(1) Shared Leg assembly



**120° Double Sided Three Pack**  
Includes:  
(3) Center Post Legs  
(1) End-of-Run Leg assembly  
(1) Shared Leg assembly

### Leg Options



**Straight Leg**  
(Single Sided)




**Angled Leg**  
(Single Sided)



**Straight Leg**  
(Double Sided)



**Angled Leg**  
(Double Sided)



**Column Leg**  
(Double Sided)


**Note** Knife edge worksurfaces require angled legs to accommodate the worksurface edge profile.

# Building Intuity Benching in Five Easy Steps


## Step Three: Specify Worksurfaces

**Worksurfaces are separately specified for a Starter Kit and Add-On Kit(s).**

- Intuity worksurfaces are available in wood or laminate. Edge options include Edgeband or Knife Edge.
- An In-Line, Double Sided, Starter Kit or Add-On Kit require two separately specified Intuity Rectangular Worksurfaces With or Without Access Hatches. Note: Specification of the Starter Kit or Add-On Kit drives the worksurface specification for Access Hatches.
- A Rectangular worksurface for use with Access Hatches is reduced 4" in depth to accommodate the hatch.
- A 120°, Double Sided, Starter Kit or Add-On Kit require three separately specified 120° Corner, Wrap-Around worksurfaces; with or without optional wireways.
- A 120°, Double Sided, Starter Kit or Add-On Kit is not available with access hatches. Therefore, a 120° Corner, Wrap-Around Worksurface is available with optional wireways for power and cable management.
- A 24" deep Single Sided, Starter Kit or Add-On Kit, require a 24" deep worksurface; 30" deep Single Sided Kit requires a 30" deep worksurface.
- A 48" deep Double Sided, Starter Kit or Add-On Kit, requires 24" deep worksurfaces; a 60" deep double sided Kit requires 30" deep worksurfaces.

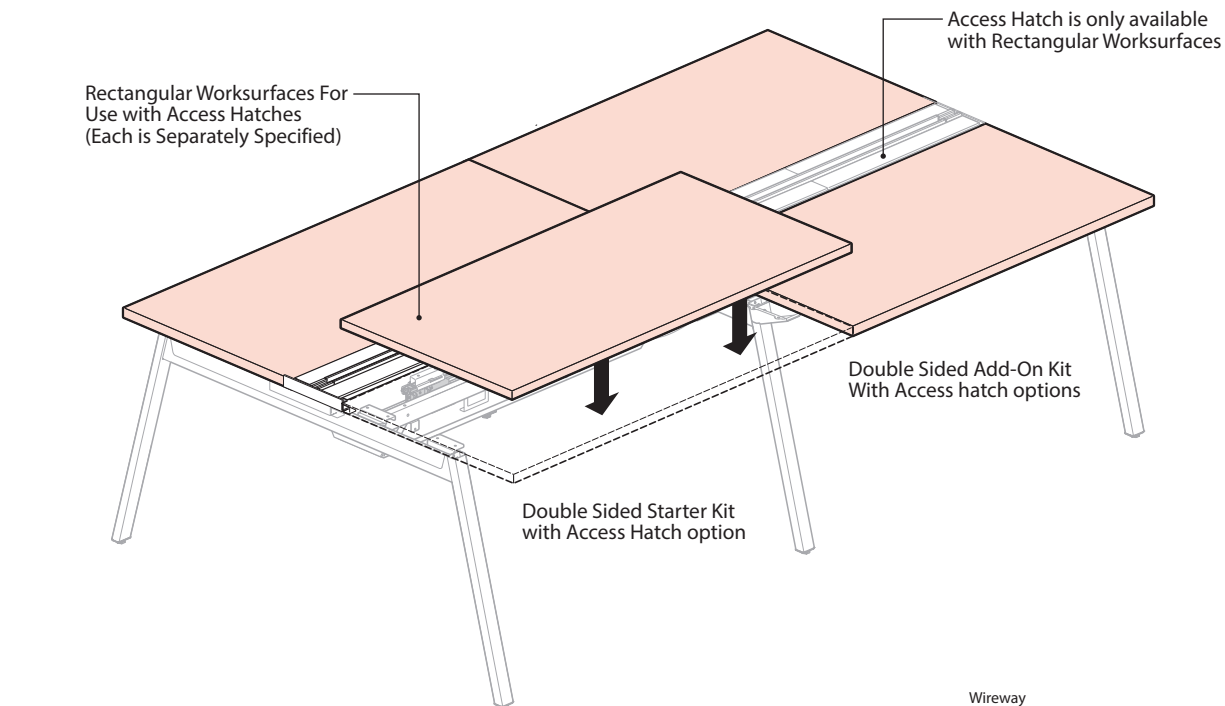


### Intuity Worksurfaces




Rectangular Worksurface



Corner, 120° Wrap-Around Worksurface



Rectangular Worksurface For Use with Access Hatches



Corner, 120° Wrap-Around Worksurface With Optional Wireway  
Not available with Access Hatches



- Access hatch option is not available for 120° Starter or Add-On Kits
- Worksurface support brackets and leg assemblies are included with the Starter Kit and Add-On Kit.

### Note

Knife edge worksurfaces require angled legs to accommodate the worksurface edge profile.



## Building Intuity Benching in Five Easy Steps

### Step Four: Specify Power Components and Cable Management

**Specify Power Components to distribute power In, Through and Out of the furniture.**

**Specify Cable Management Components to route, conceal, mount and manage cables and electrical components.**

**Power In** – Brings power from the building into the furniture.

- Infeed Harness
- Base Feed Module – Architectural Concealed
- Internal Power Base AI Base Feed
- Top Feed

• **Power Through** – Distributes power throughout the furniture.


- PDA (included with powered Starter Kits and Add-On Kits)
- Jumper (included with powered Add-On Kits)
- Utility Tray Retrofit Kits (Separately Specified, used to convert non-powered Utility Trays to powered)

• **Power Out** – Distributes power out of the furniture to the user.

- Triplex Receptacles or Duplex Receptacles with USB Chargers.
- Power Taps/Power Tap Brackets
- Enhanced Power Modules

• **Cable Management** – Routes, conceals, mounts and manages cables and electrical components.

- Utility Tray (Standard with single sided Starter Kits and Add-On Kits, specified option available with double sided Starter Kits and Add-On Kits)
- Power Tap Brackets (Fixed/Adjustable/Under Surface)
- Base Feed Cover – Vertical, Cord Manager – Mesh, Conduit Clamp, Cable Chain, Wire Management Loop, Vertical Cable Guide

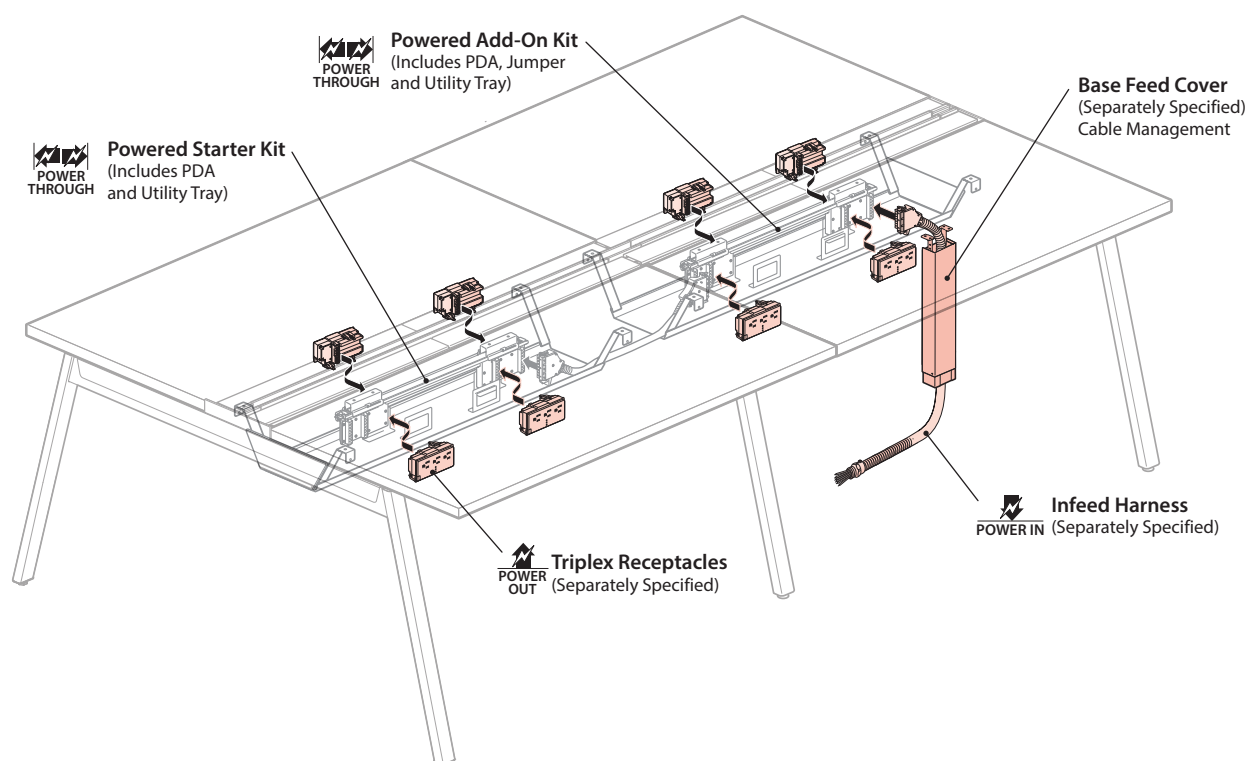


- Note**
- Single Sided Starter Kits and Add-On Kits include a Utility Tray.
  - Double Sided Starter Kits and Add-On Kits may be specified with optional Utility Trays for non-powered applications.
  - Starter Kits with a Utility Tray may be specified with optional Power Distribution Assemblies (PDAs).
  - All other Electrical Components (Power In and Power Out) and Wire Management components must be separately specified.
  - Non-Powered Utility Trays may be converted to Power with the separately specified Utility Tray Retrofit Kit.

# Building Intuity Benching in Five Easy Steps

## Step Five: Specify Screens, Lights and Accessories

**Specify Screens, Accessories and Lights for added privacy, organization and illumination.**

- Specify Intuity Rail Mounted Screen or Active Component Center Screen to match nominal width of each Starter Kit / Add-On Kit.
- See the Accessory Price List for all available Lights and other Accessories.

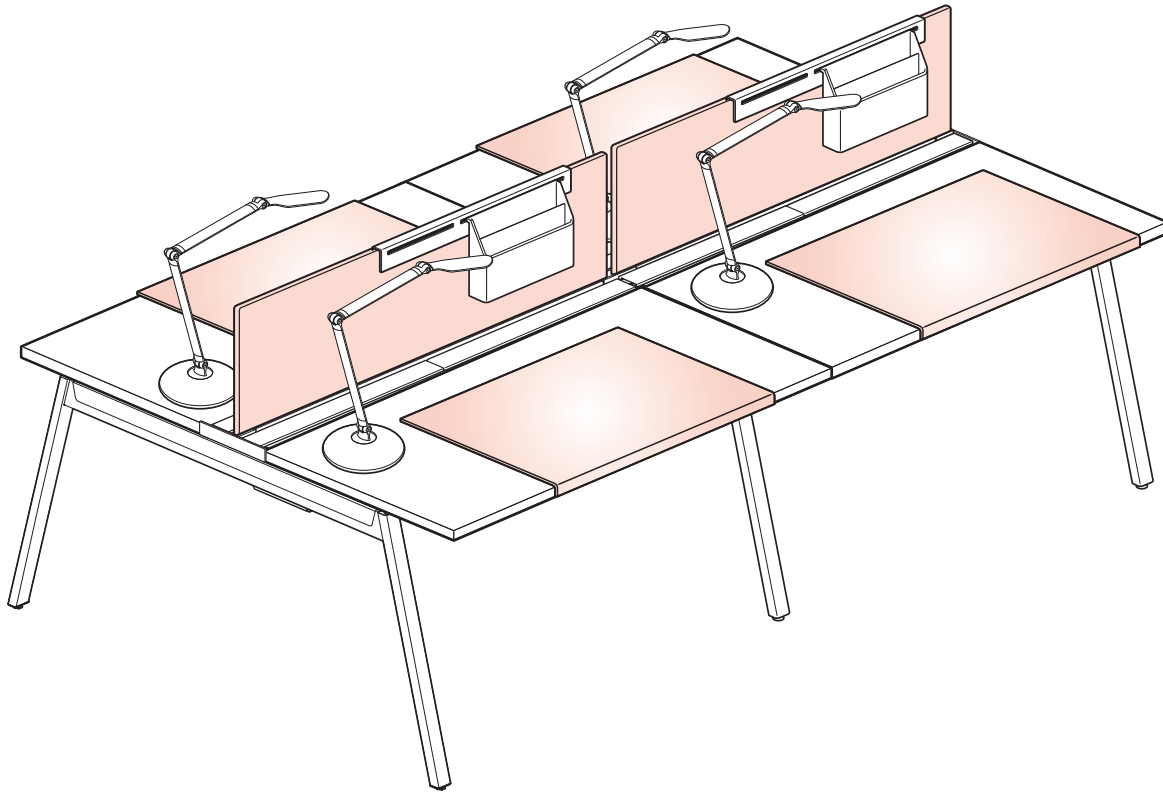


**This page intentionally left blank.**


## Statement of Line Intuity Benching

## Statement of Line – Intuity Benching

### Single Sided Starter Kits




Single Sided Starter Kit – Straight Leg




Single Sided Starter Kit – Angled Leg

### Single Sided Add-on Kits




Single Sided Add-On Kit – Straight Leg




Single Sided Add-On Kit – Angled Leg

### Double Sided Starter Kits




Double Sided Starter Kit – Straight Leg




Double Sided Starter Kit – Angled Leg


### Double Sided Add-on Kits



Double Sided Add-On Kit – Straight Leg




Double Sided Add-On Kit – Angled Leg




Double Sided Add-On Kit – Column Leg

### 120° Single Sided Starter Kits




120° Single Sided Starter Kit – Straight Leg




120° Single Sided Starter Kit – Angled Leg

### 120° Double Sided Three Pack Starter Kits




120° Double Sided Three Pack Starter Kit – Straight Leg




120° Double Sided Three Pack Starter Kit – Angled Leg


### 120° Double Sided Three Pack Add-on Kits




120° Double Sided Three Pack Add-on Kit – Shared Straight Leg and Straight Leg



120° Double Sided Three Pack Add-on Kit – Shared Angled Leg and Angled Leg




120° Double Sided Three Pack Add-on Kit – Column Leg and Straight Leg




120° Double Sided Three Pack Add-on Kit – Column Leg and Angled Leg

## Statement of Line – Intuity Benching


### Leg Kits



Bench End Leg Kit




Return Leg Kit –  
Straight Leg




Return Leg Kit –  
Angled Leg


### Worksurfaces



Rectangular Worksurface



Rectangular Worksurface  
For Use with Access Hatches



Bench End Worksurface




Return Worksurface




Corner, 120° Wrap-Around  
Workforce


### Accessories




Tie Plate




Screen Aligner




Double-Sided Utility  
Tray End Covers




120° Infeed Cover




Screen – Rail Mounted




Gap Filler




Bin



Accessory Rail




Accessory Rail Mounting  
Bracket Kit, Single Sided




Accessory Rail  
Mounting Bracket  
Kit, Double Sided

## Statement of Line – Intuity Benching


### Belong Electrical Components




**Infeed Harness**  
3-Circuit or 4-Circuit  
(2+2 and 3+1)




**Base Feed Module – Architectural Concealed Hardwire Connection**  
3-Circuit or 4-Circuit  
(2+2 and 3+1)




**Internal Power Base™ AI Base Feed**  
3-Circuit or 4-Circuit  
(2+2 and 3+1)




**Jumper**  
3-Circuit or 4-Circuit  
(2+2 and 3+1)




**Utility Tray Power Retrofit Kit**  
3-Circuit or 4-Circuit  
(2+2 and 3+1)




**Top Feed**  
3-Circuit or 4-Circuit  
(2+2 and 3+1)




**Triplex Receptacles – 15 AMP** – 3-Circuit or 4-Circuit (2+2 and 3+1)




**Triplex Receptacles – 20 AMP** – 3-Circuit or 4-Circuit (2+2 and 3+1)




**15 Amp Duplex Receptacle with USB Charging Outlet**  
3-Circuit or 4-Circuit  
(2+2 and 3+1)



**Top Feed – Hardwired**




**Hardwire Kit**




**Cover Plates**

### Electrical Accessories



**Base Feed Cover – Vertical – Fixed Height**



**Base Feed Cover – Vertical – Adjustable Height**


## Statement of Line – Intuity Benching

### A Series Credenzas – 1.5H – Credenzas with Drawers


#### Materials:

- Laminate Case/Steel Front


#### 48" Wide




24" Box/File Left – 24" Open Right



30" Box/File Left – 18" Open Right




24" Open Left – 24" Box/File Right




18" Open Left – 30" Box/File Right


#### 60" Wide




30" Box/File Left – 30" Open Right




36" Box/File Left – 24" Open Right



30" Open Left – 30" Open Right




24" Box/File Left – 36" Open Right




15" Open Left – 30" Box/File Center –  
15" Open Right


#### 72" Wide

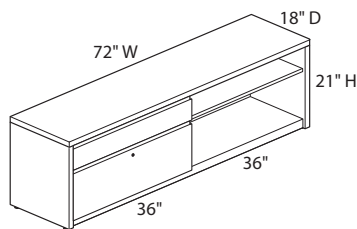

36" Box/File Left – 36" Open Right



36" Open Left – 36" Box/File Right



18" Open Left – 36" Box/File Center –  
18" Open Right




## Statement of Line – Intuity Benching

### A Series Credenzas – 1.5H – Credenzas with Doors


#### Materials:

- Laminate Case/Steel Front


#### 48" Wide




24" Doors Left – 24" Open Right



30" Doors Left – 18" Open Right




24" Open Left – 24" Doors Right




18" Open Left – 30" Doors Right


#### 60" Wide




30" Doors Left – 30" Open Right




36" Doors Left – 24" Open Right




42" Doors Left – 18" Open Right




30" Open Left – 30" Doors Right



24" Open Left – 36" Doors Right




18" Open Left – 42" Doors Right




15" Open Left – 30" Doors Center – 15" Open Right


#### 72" Wide




36" Doors Left – 36" Open Right




42" Doors Left – 30" Open Right



36" Open Left – 36" Doors Right




30" Open Left – 42" Doors Right




18" Open Left – 36" Doors Center – 18" Open Right


### X Series Mobile Pedestal and Accessories




Box/File – Mobile



Pencil/Box/File – Mobile



Pencil Tray



Dividers




Pedestal Cushion Kit

## Product Details – Intuity Benching

## Product Details – Intuity Benching

### Single Sided Starter Kit

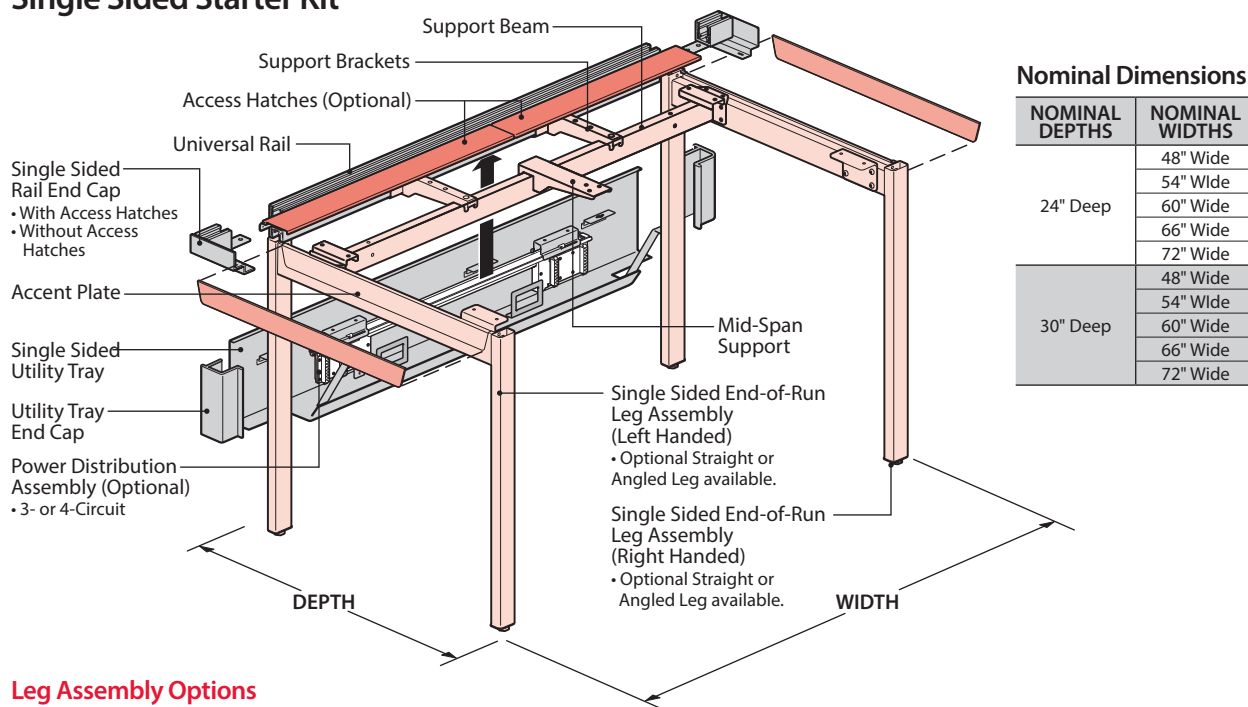


#### Nominal Dimensions


NOMINAL DEPTHS	NOMINAL WIDTHS
24" Deep	48" Wide
	54" Wide
	60" Wide
	66" Wide
	72" Wide
30" Deep	48" Wide
	54" Wide
	60" Wide
	66" Wide
	72" Wide

### Leg Assembly Options

#### I Straight Leg Option



#### A Angled Leg Option




**Note** Separately specified knife edge worksurfaces require angled legs.

### Power Type Options

- Single Sided Starter Kits are standard with an integrated below-surface Utility Tray.
- The Utility Tray may be specified with the following power options:


- N** Non-Powered (Utility Tray without PDA)
- 3** 3-Circuit (Utility Tray with 3-Circuit PDA)
- 2** 4-Circuit 2+2 (Utility Tray with 4-Circuit 2+2 PDA)
- 4** 4-Circuit 3+1 (Utility Tray with 4-Circuit 3+1 PDA)
- C** Hardwire (Utility Tray with 2 Junction boxes)

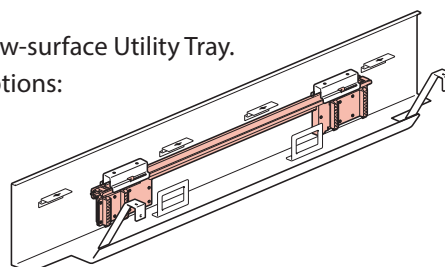


### Access Hatch Options

- Worksurface access hatches are an optional product feature, if specified they are factory installed on the Starter Kit.

#### C No Access Hatches

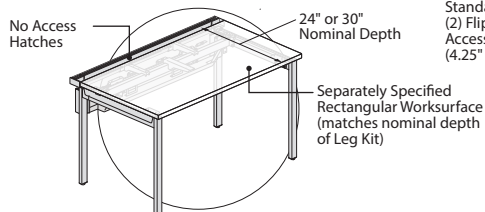


#### S Access Hatches

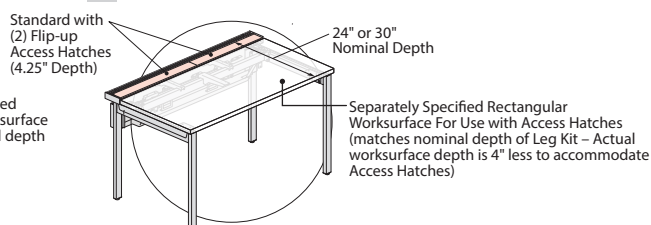

**Note** Worksurfaces must be separately specified.


## Product Details – Intuity Benching

### Single Sided Add-on Kit

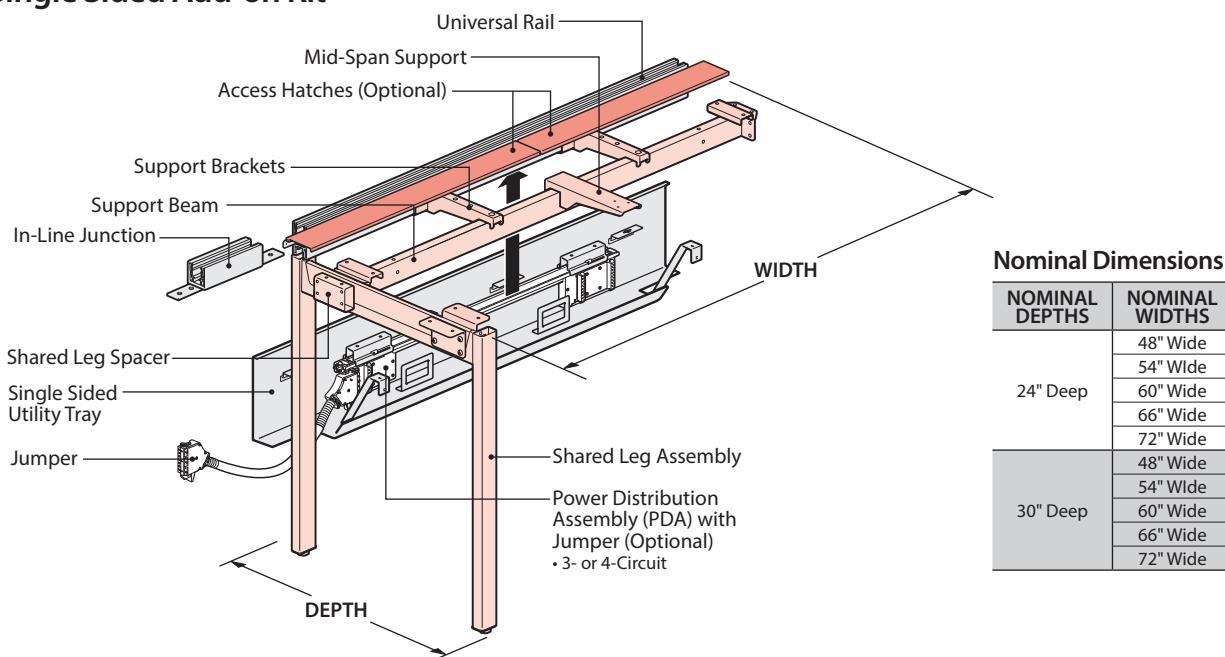


### Leg Assembly Options

**T** Straight Leg Option



**S** Angled Leg Option




**Note** Separately specified knife edge worksurfaces require angled legs.

### Power Type Options

- Single Sided Add-on Kits are standard with an integrated below-surface Utility Tray.
- The Utility Tray may be specified with the following power options:


- N** Non-Powered (Utility Tray without PDA)
- 3** 3-Circuit (Utility Tray with 3-Circuit PDA and Jumper)
- 2** 4-Circuit 2+2 (Utility Tray with 4-Circuit 2+2 PDA and Jumper)
- 4** 4-Circuit 3+1 (Utility Tray with 4-Circuit 3+1 PDA and Jumper)
- C** Hardwire (Utility Tray with 2 Junction boxes)

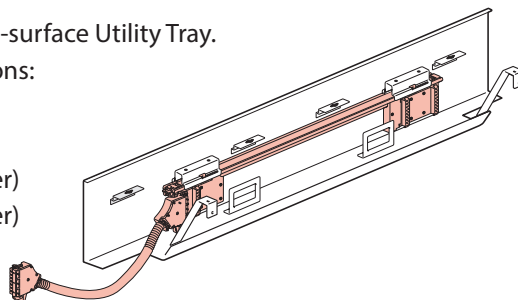


### Access Hatch Options

Worksurface access hatches are an optional product feature, if specified they are factory installed on the Add-on Kit.

**C** No Access Hatches

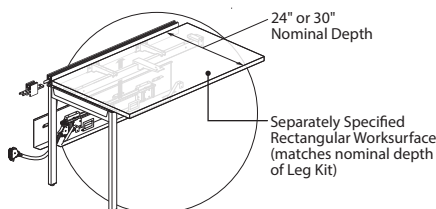


**S** Access Hatches

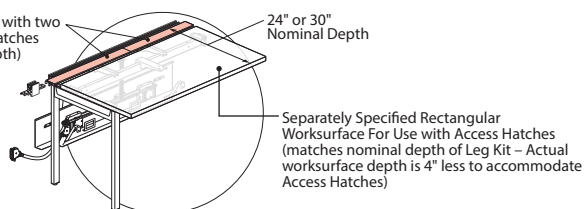

**Note** Worksurfaces must be separately specified.

## Product Details – Intuity Benching

### Double Sided Starter Kit

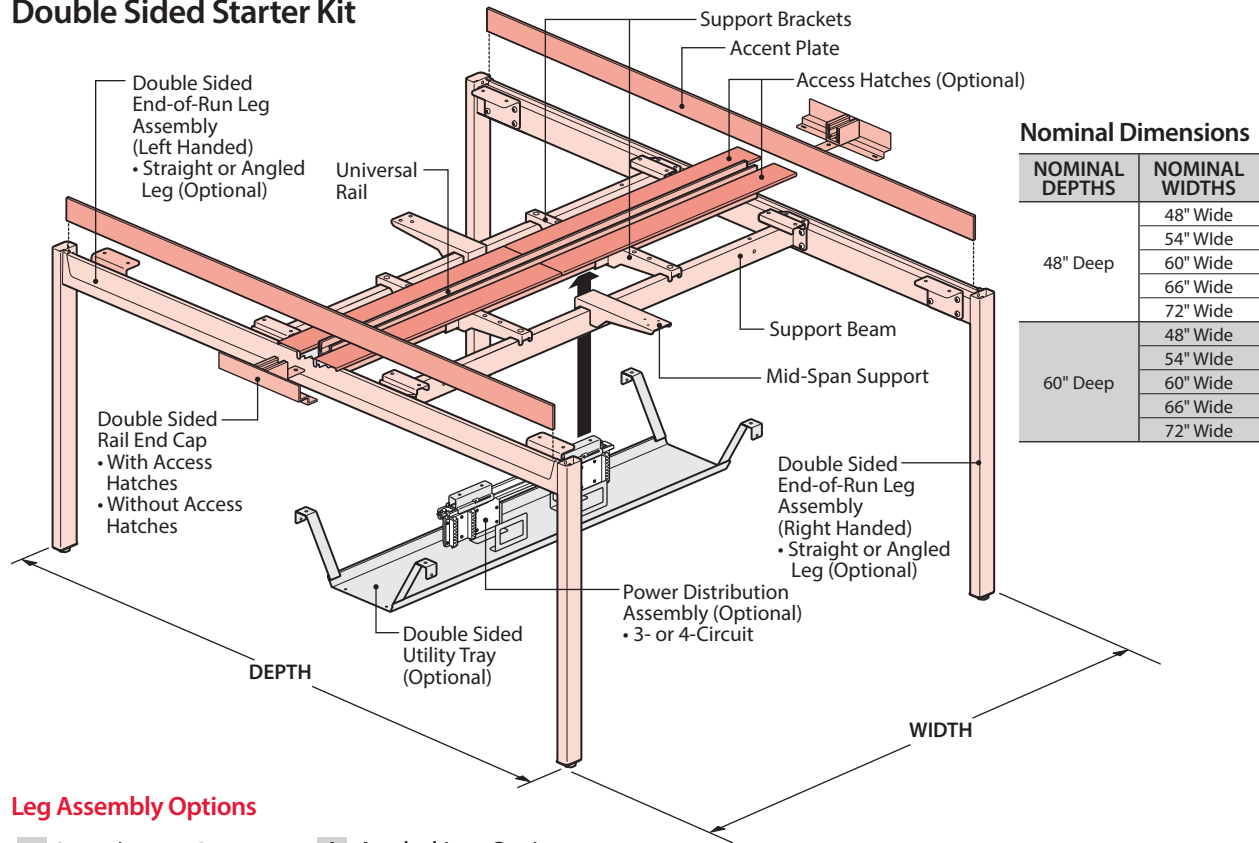


#### Nominal Dimensions


NOMINAL DEPTHS	NOMINAL WIDTHS
48" Deep	48" Wide
	54" Wide
	60" Wide
	66" Wide
	72" Wide
60" Deep	48" Wide
	54" Wide
	60" Wide
	66" Wide
	72" Wide

#### Leg Assembly Options

**I** Straight Leg Option



**A** Angled Leg Option




**Note** Separately specified knife edge worksurfaces require angled legs.

#### Power Type Options

- Double Sided Starter Kits are available with or without an integrated below-surface Utility Tray.
- The Utility Tray may be specified with the following power options:


- N** Non-Powered (Utility Tray without PDA)
- 3** 3-Circuit (Utility Tray with 3-Circuit PDA)
- 2** 4-Circuit 2+2 (Utility Tray with 4-Circuit 2+2 PDA)
- 4** 4-Circuit 3+1 (Utility Tray with 4-Circuit 3+1 PDA)
- C** Hardwire (Utility Tray with 2 Junction boxes)

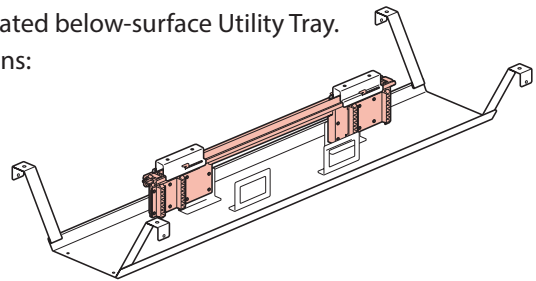

#### Access Hatch Options


- Worksurface access hatches are an optional product feature, if specified they are factory installed on the Starter Kit.

**C** No Access Hatches



Standard with two access hatches on each side (4 1/4" Depth)  
Separately Specified Rectangular Worksurface (matches nominal depth of Leg Kit)

**S** Access Hatches




Standard with two access hatches on each side (4 1/4" Depth)  
Separately Specified Rectangular Worksurface For Use with Access Hatches (matches nominal depth of Leg Kit – Actual worksurface depth is 4" less to accommodate Access Hatches)

**Note** Worksurfaces must be separately specified.


## Product Details – Intuity Benching

### Double Sided Add-on Kit

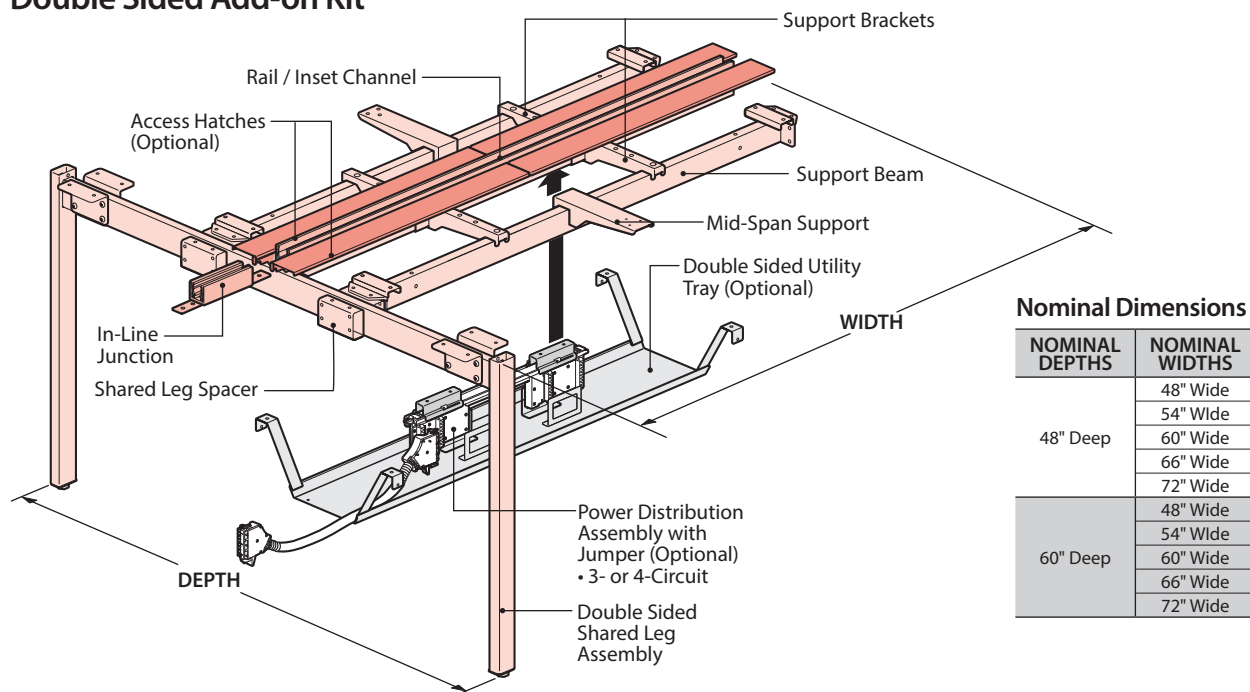


### Leg Assembly Options


**T** Straight Leg Option



**S** Angled Leg Option



**F** Column Leg Option




**Note**

Separately specified knife edge worksurfaces require Add-on Kits with angled or column legs.

### Power Type Options

- Double Sided Add-on Kits are available with or without an integrated below-surface Utility Tray.
- The Utility Tray may be specified with the following power options:


- N** Non-Powered (Utility Tray without PDA)
- 3** 3-Circuit (Utility Tray with 3-Circuit PDA)
- 2** 4-Circuit 2+2 (Utility Tray with 4-Circuit 2+2 PDA)
- 4** 4-Circuit 3+1 (Utility Tray with 4-Circuit 3+1 PDA)
- C** Hardwire (Utility Tray with 2 Junction boxes)

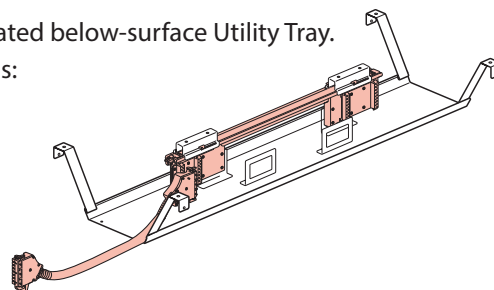


### Access Hatch Options

Worksurface access hatches are an optional product feature, if specified they are factory installed on the Starter Kit.

**C** No Access Hatches

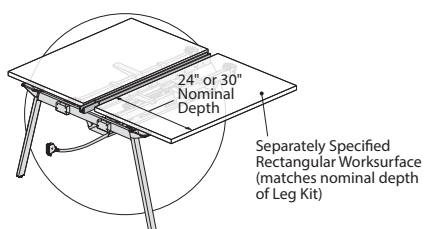


**S** Access Hatches

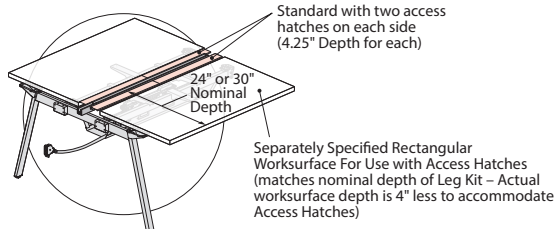

**Note** Worksurfaces must be separately specified.

## Product Details – Intuity Benching

### 120° Single Sided Starter Kit

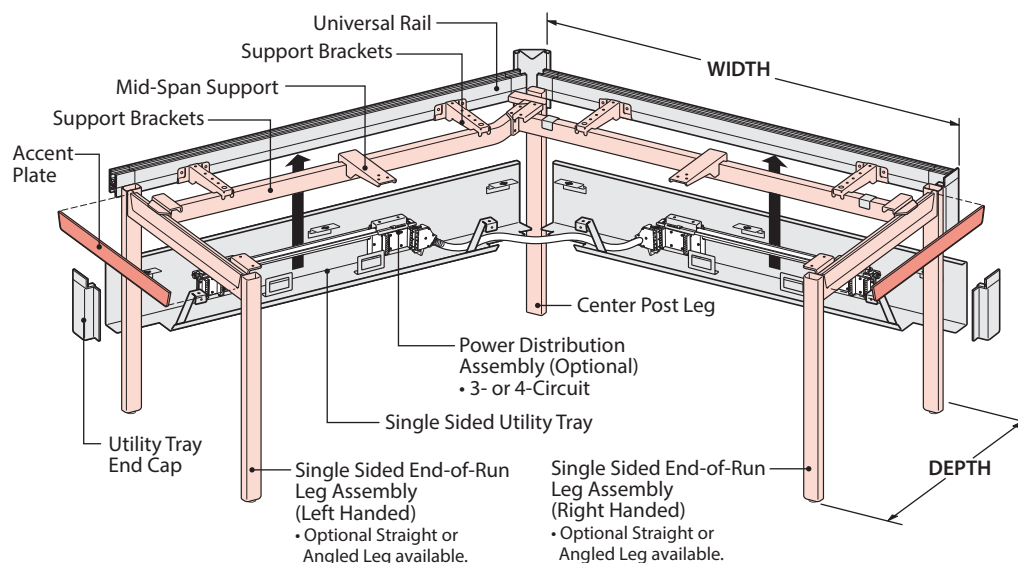


#### Nominal Dimensions


NOMINAL DEPTHS	NOMINAL WIDTHS
24" Deep	42" Wide
	48" Wide
	54" Wide
30" Deep	42" Wide
	48" Wide
	54" Wide

#### Leg Assembly Options

**I** Straight Leg Option



**A** Angled Leg Option




**Note** Separately specified knife edge worksurfaces require angled legs.

#### Power Type Options

- Single Sided Starter Kits are standard with an integrated below-surface Utility Tray.
- The Utility Tray may be specified with the following power options:


- N** Non-Powered (Utility Tray without PDA)
- 3** 3-Circuit (Utility Tray with 3-Circuit PDA)
- 2** 4-Circuit 2+2 (Utility Tray with 4-Circuit 2+2 PDA)
- 4** 4-Circuit 3+1 (Utility Tray with 4-Circuit 3+1 PDA)
- C** Hardwire (Utility Tray with 4 Junction boxes)

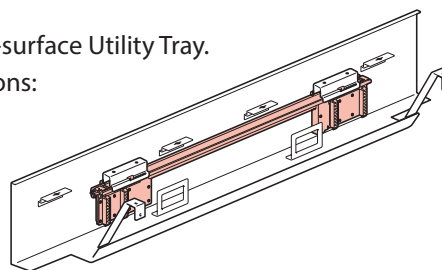




# Product Details – Intuity Benching

## 120° Double Sided Three Pack Starter Kit

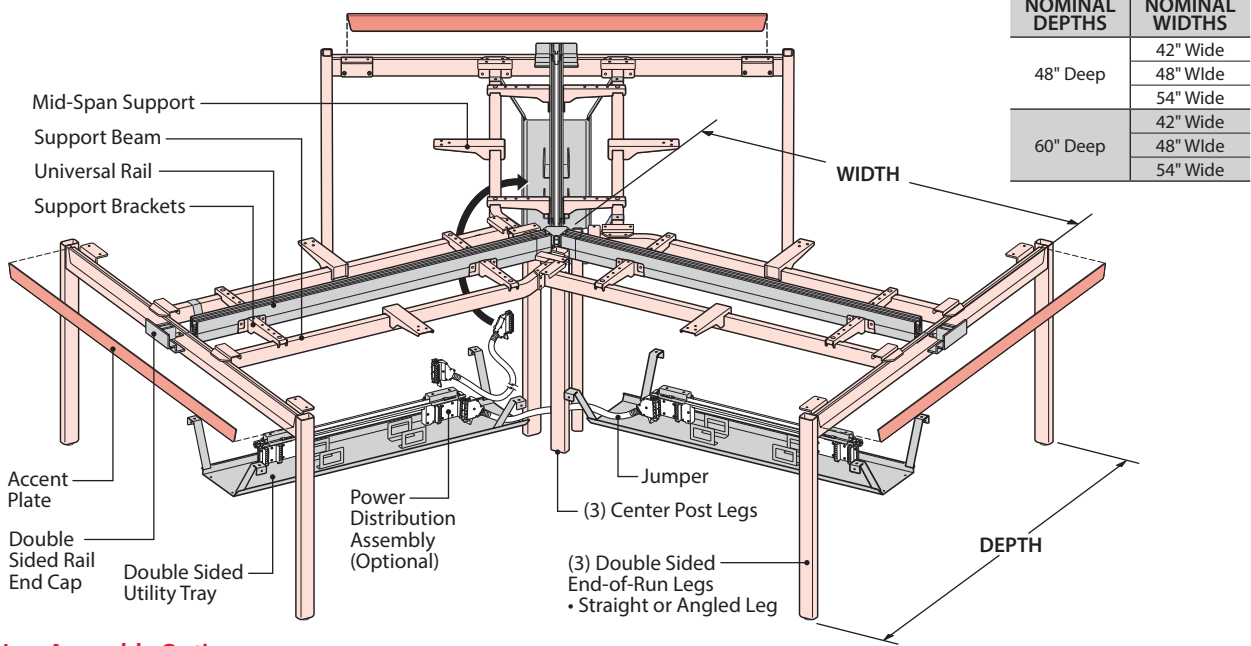


### Leg Assembly Options

**I** Straight Leg Option



**A** Angled Leg Option




**Note** Separately specified knife edge worksurfaces require angled legs.

### Power Type Options

- Double Sided Starter Kits are available with or without an integrated below-surface Utility Tray.
- The Utility Tray may be specified with the following power options:


- N** Non-Powered (Utility Tray without PDA)
- 3** 3-Circuit (Utility Tray with 3-Circuit PDA)
- 2** 4-Circuit 2+2 (Utility Tray with 4-Circuit 2+2 PDA)
- 4** 4-Circuit 3+1 (Utility Tray with 4-Circuit 3+1 PDA)
- C** Hardwire (Utility Tray with 6 Junction boxes)

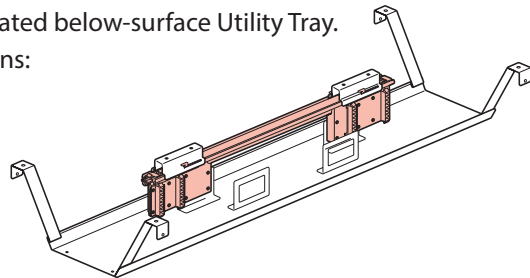



## Product Details – Intuity Benching

### 120° Double Sided Three Pack Add-on Kit

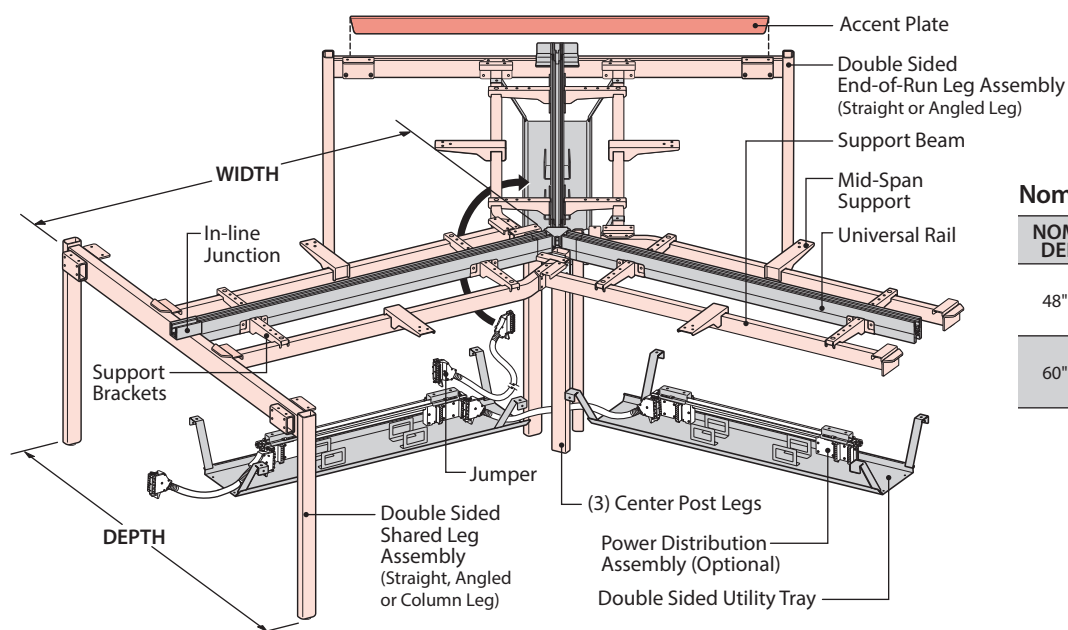


#### Nominal Dimensions


NOMINAL DEPTHS	NOMINAL WIDTHS
48" Deep	42" Wide
	48" Wide
	54" Wide
60" Deep	42" Wide
	48" Wide
	54" Wide

#### Leg Assembly Options:


**W** Shared Straight Leg and Straight Leg




**Y** Shared Angled Leg and Angled Leg



**X** Column Leg and Straight Leg



**Z** Column Leg and Angled Leg




**Note** Separately specified knife edge worksurfaces require Add-on Kits with angled or column legs.

#### Power Type Options

- Double Sided Starter Kits are available with or without an integrated below-surface Utility Tray.
- The Utility Tray may be specified with the following power options:


- N** Non-Powered (Utility Tray without PDA)
- 3** 3-Circuit (Utility Tray with 3-Circuit PDA)
- 2** 4-Circuit 2+2 (Utility Tray with 4-Circuit 2+2 PDA)
- 4** 4-Circuit 3+1 (Utility Tray with 4-Circuit 3+1 PDA)
- C** Hardwire (Utility Tray with 6 Junction boxes)

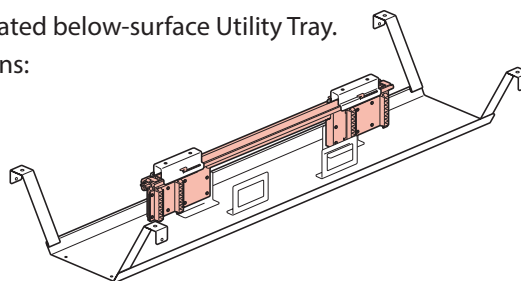

## Product Details – Intuity Benching

### Bench End Leg Kit


- The Bench End Leg Kit may be used with a separately specified Bench End Worksurface to provide additional Worksurface area at the end of a Double Sided Intuity Benching run.
- The kit includes (2) fixed height steel legs and attachment hardware.

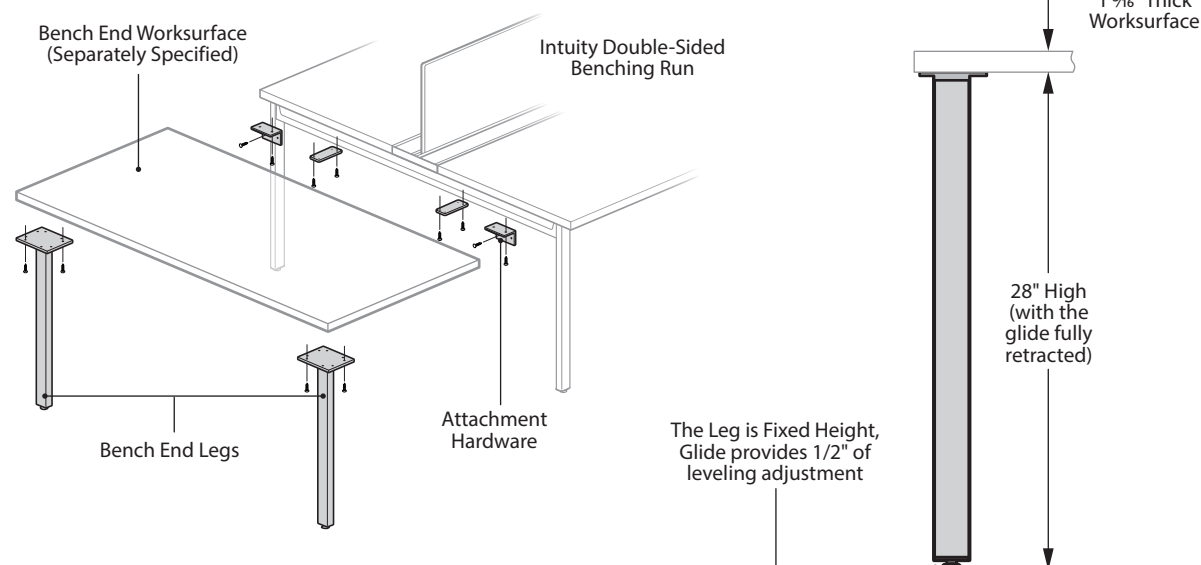

**Note** Accent Plate must be removed prior to installation of the Bench End Leg Kit.

### Bench End Worksurface


- The Bench End Worksurface may be combined with the Bench End Leg Kit to provide additional Worksurface area at the end of a Double Sided Intuity Benching run.
- Knife Edge option for use with Knife Edge Primary Worksurfaces, includes Knife Edge on all three user edges.

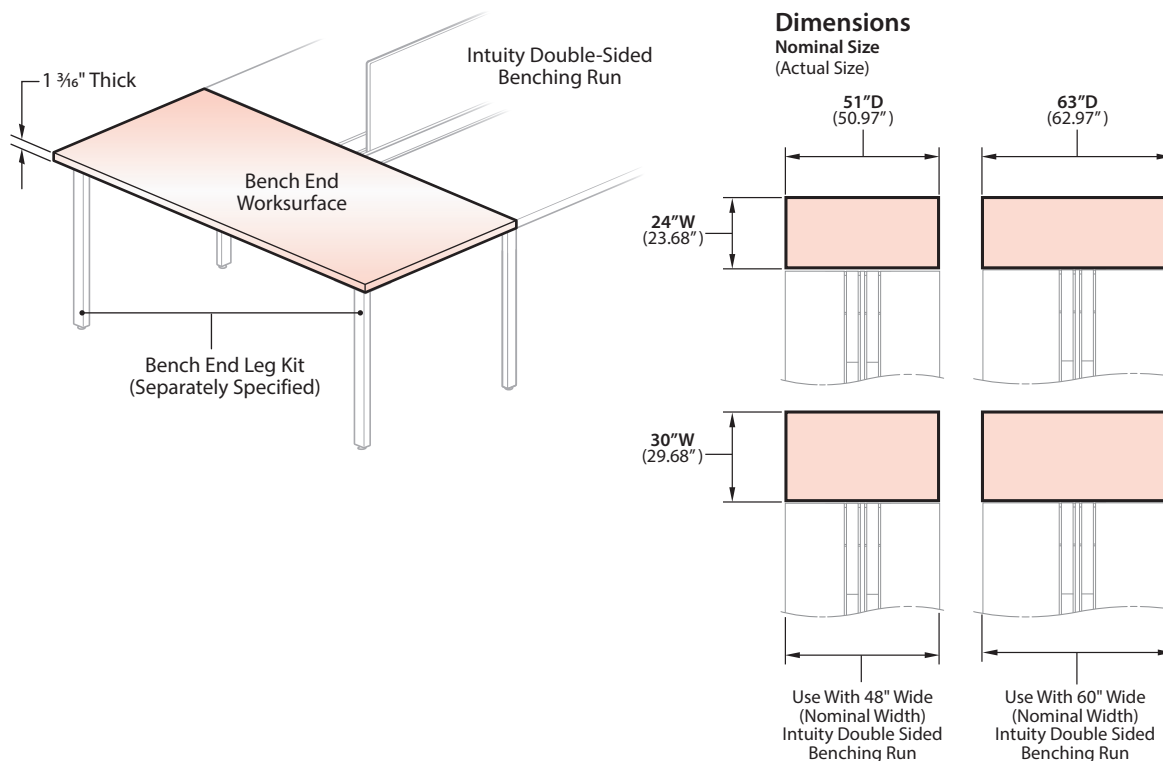

## Product Details – Intuity Benching

### Return Leg Kit


- A Return Leg Kit and a separately specified Return Worksurface may be used to create a return that can be attached to the front edge of a rectangular worksurface on an Intuity Benching Run.
- Specify Return Leg Kit depths to match depth of Return Worksurface (24" or 30" Nominal Depth).
- Straight Leg Kits are non-handed and Angled Leg Kits are available Left or Right handed to accommodate the orientation of the Return Worksurface.

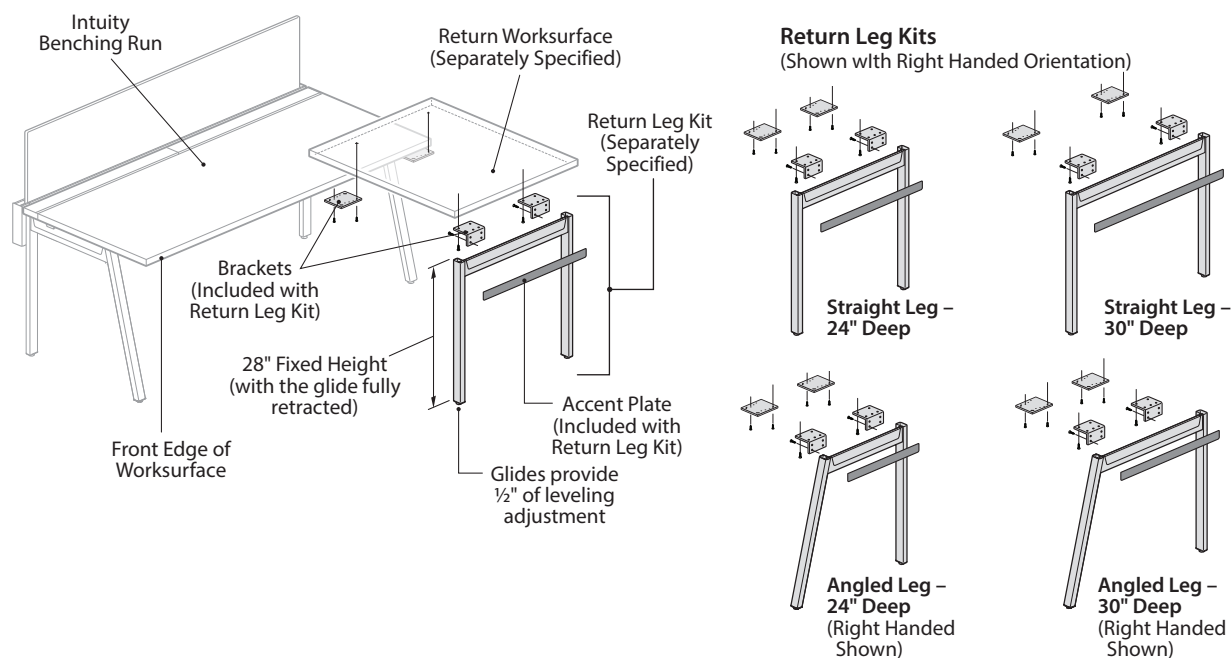

### Return Worksurface

- A Return Worksurface combined with the separately specified Return Leg Kit may be used to create a return that can be attached to the front edge of a rectangular worksurface on an Intuity Benching Run.
- Specify Return Worksurface depths to match depth of Return Kits (24" or 30" Nominal Depth).

#### User Side Edge Options




3 mm Edgeband  
On User Side

- Laminate (J)
- Wood (K)

Knife Edge  
On User Side


- Laminate (F)
- Wood (U)

1 mm Edgeband On Sides and Back

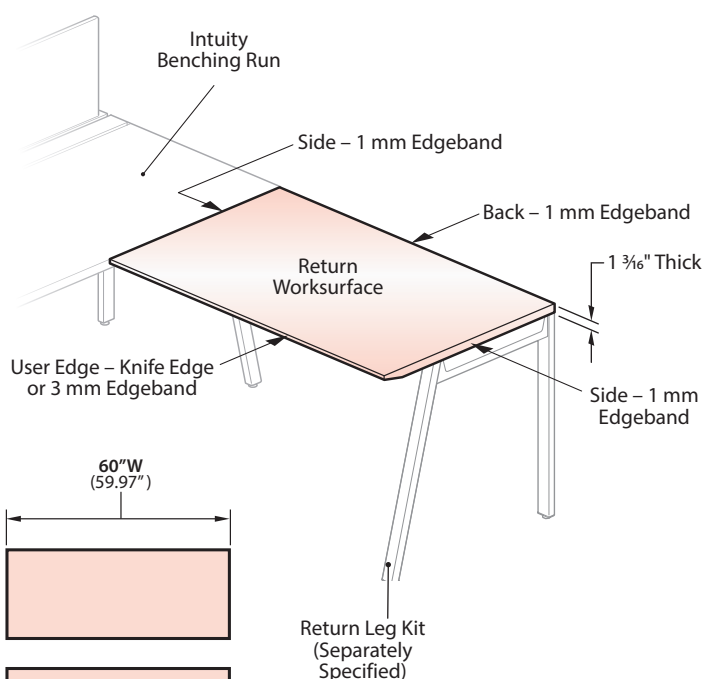

#### Dimensions

Nominal Size  
(Actual Size)


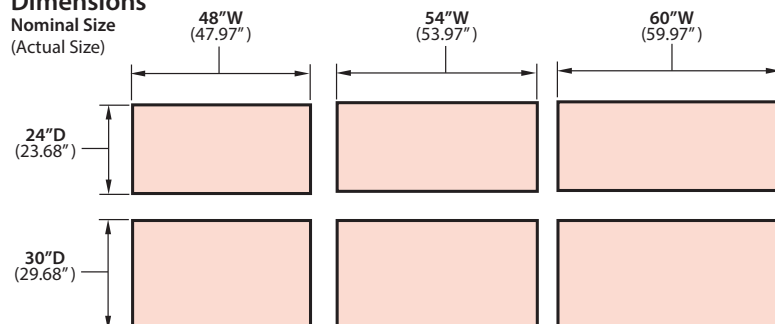


# Product Details – Intuity Benching

## Worksurfaces

Rectangular worksurfaces are available with or without an access hatch.

### Rectangular Worksurface

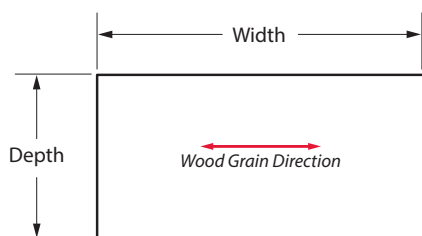


#### Dimensions –

Nominal Size  
(Actual Size)

	48"W (47.97")	54"W (53.97")	60"W (59.97")	66"W (65.97")	72"W (71.97")
24"D (23.68")					
30"D (29.68")					


### Rectangular Worksurface – For Use with Access Hatches

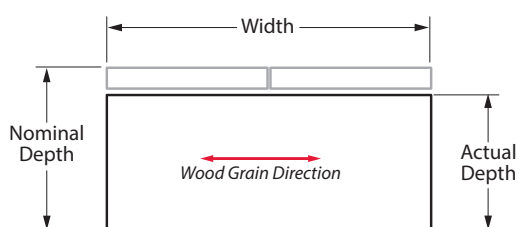

#### Dimensions –

Nominal Size  
(Actual Size)

	48"W (47.97")	54"W (53.97")	60"W (59.97")	66"W (65.97")	72"W (71.97")	
24"D						19.68" Actual Depth
30"D						25.68" Actual Depth

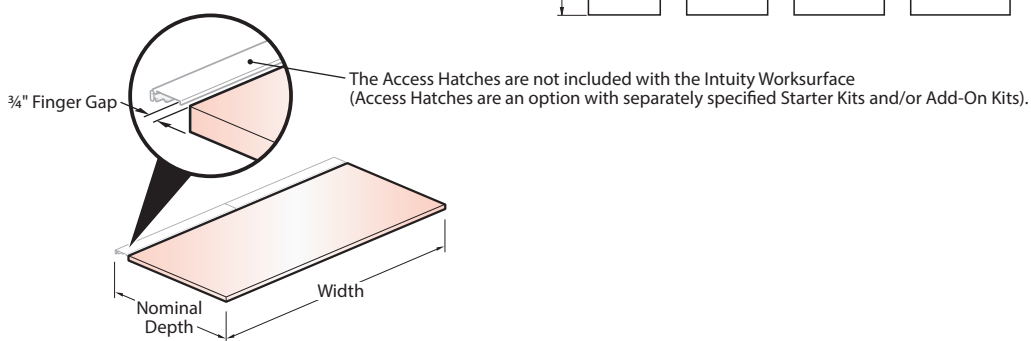


The Access Hatch is located at the back of the worksurface and has two hinged doors. Each door is half the nominal width of the worksurface. An Access Hatch provides easy access to the power distribution assembly (PDA) and Utility Tray, if specified. The 4 1/4" deep Access Hatch is a specified option available with Starter Kits and Add-On Kits.

## Product Details – Intuity Benching


### Worksurfaces

#### Corner 120° Wrap-Around

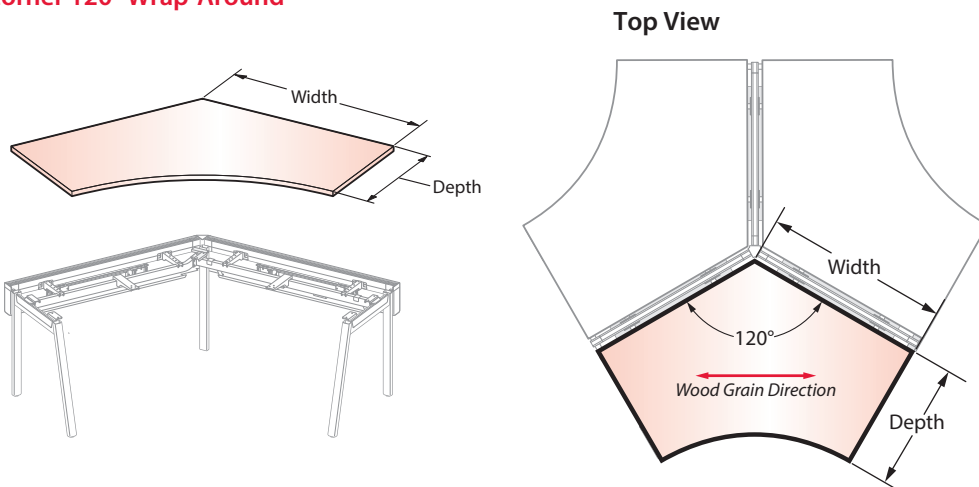


### Dimensions

Nominal Size  
(Actual Size)

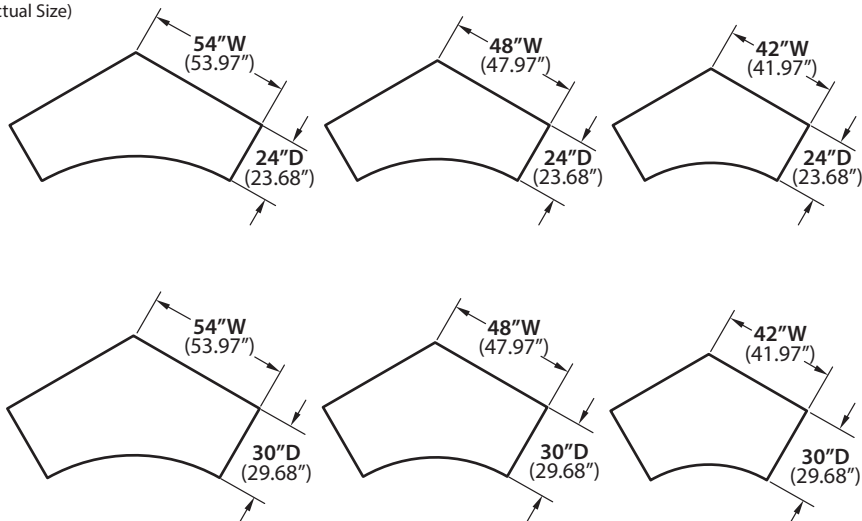

### Wireway Options

- For additional wire management, the 120° worksurfaces may be specified with a wireway for routing cables and wires below the worksurface.
- Optional wireway along back edges of worksurface is color-matched to the solid side/back edge trim. When wood grain edge trim is specified, wireway will be charcoal.

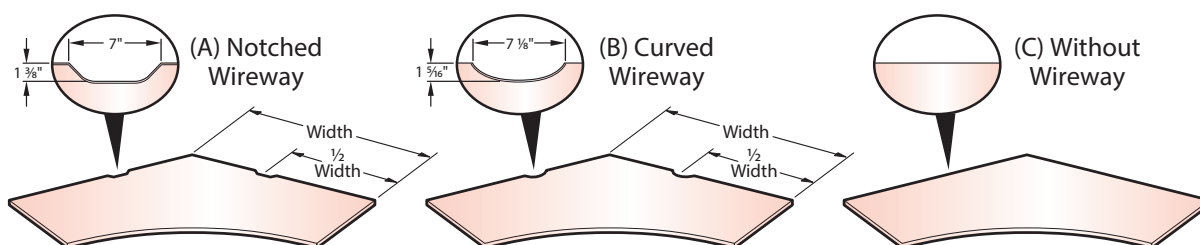

**Note** • Corner, 120° Wrap around Worksurfaces are not available with Access Hatches.

## Product Details – Intuity Benching


### Worksurfaces

Worksurfaces are available with a laminate or wood finishes and may be specified with 3 mm Edgeband or Knife Edge trim options.

#### Surface and Edge Options

Catalog logic drives surface and edge options for all Intuity Worksurfaces.

Catalog Logic:

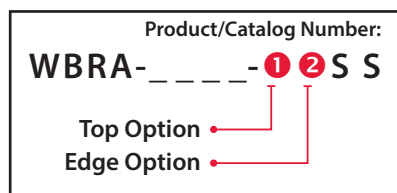

#### 1 Top Options

Surfaces	Option
Laminate Surface	L
Wood Surface	W

#### Laminate Surface (Option L)

Consists of 0.028" thick high-pressure laminate face and 0.028" thick phenolic backer.

#### Wood Surface (Option W)


Consists of 0.020" thick natural or recon veneer face and 0.020" thick resin backer.

#### 2 Edge Options

Edge	Option
Laminate 3 mm Edgeband	J
Laminate Knife Edge	F
Wood 3 mm Edgeband	K
Wood Knife Edge	U


#### 3mm Edgeband (Option J / K)

(1 3/16" Thick Worksurface)

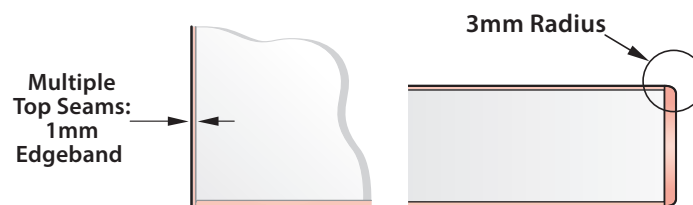

#### Knife Edge (Option F / U)

(1 3/16" Thick Worksurface)

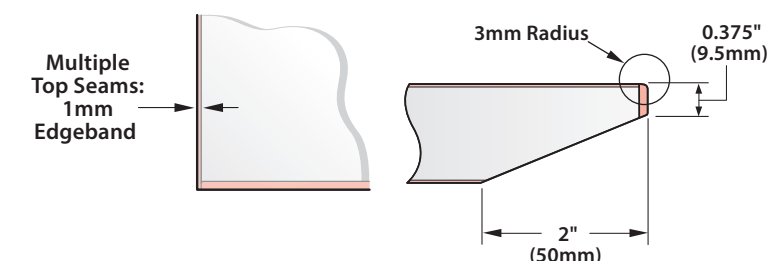


- Note**
- Edge Option is only located on the user side of the Worksurface. Back and sides have 1 mm edge band
  - Knife Edge is for use with Angled Legs, only; not for use with Straight Legs.

#### Leg Requirements


- Worksurfaces with 3mm Edgeband may be used with straight or angled legs.
- Worksurfaces with Knife Edge are only for use with angled legs.
- Worksurfaces with Knife Edge may not be used with straight legs.



Do

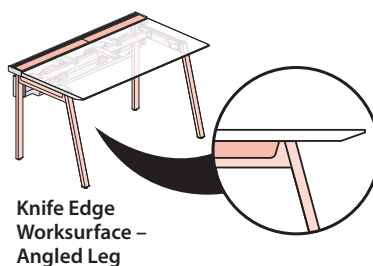

Don't

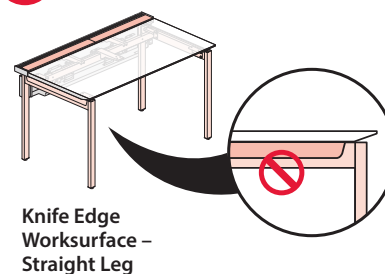


## Product Details – Intuity Benching


### Starter and Add-on Kits

Starter and Add-On Kits include support beams with attached Mid-Span Support Brackets which support the worksurface and provide overall support to the kit integrity. The Starter Kit Legs provide end-of-run support and the Add-On Kit Legs provide inboard support for shared worksurface conditions.

#### Single Sided Benching Application

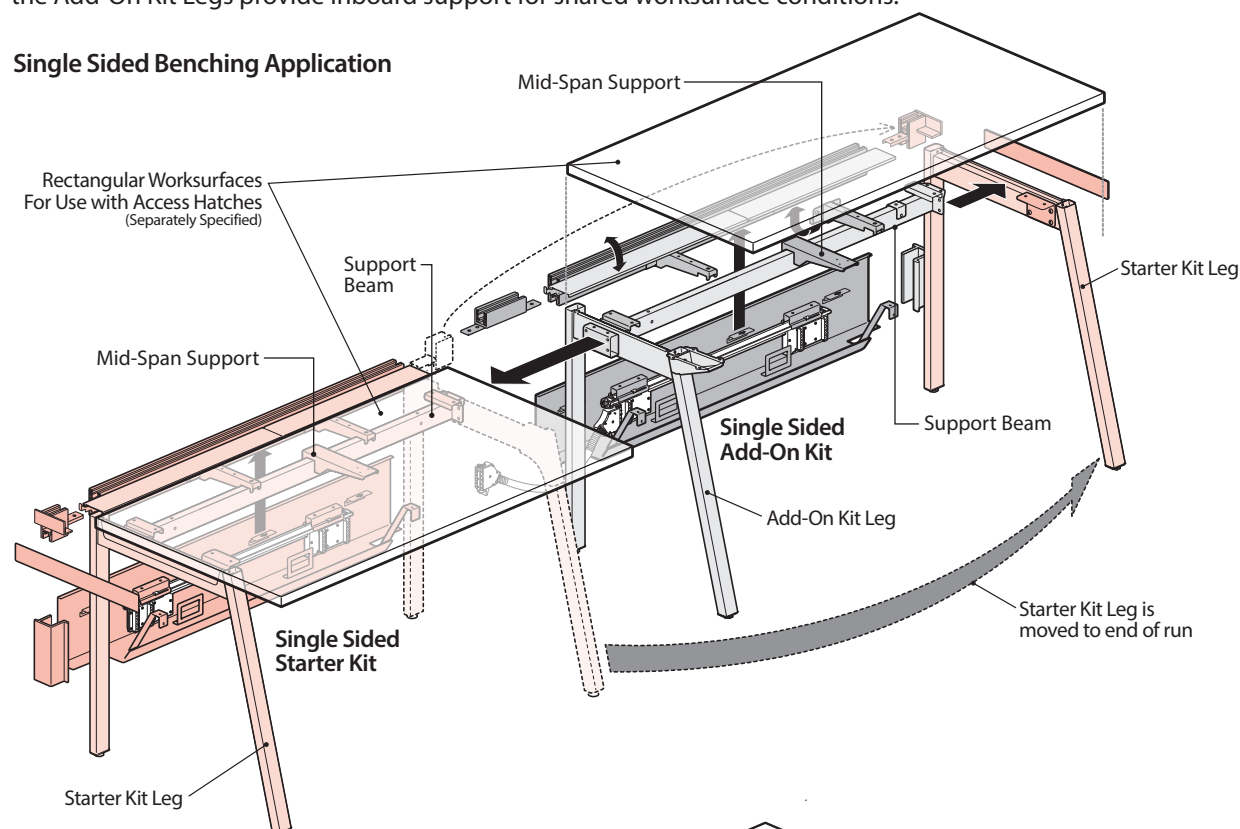

#### Double Sided Benching Application

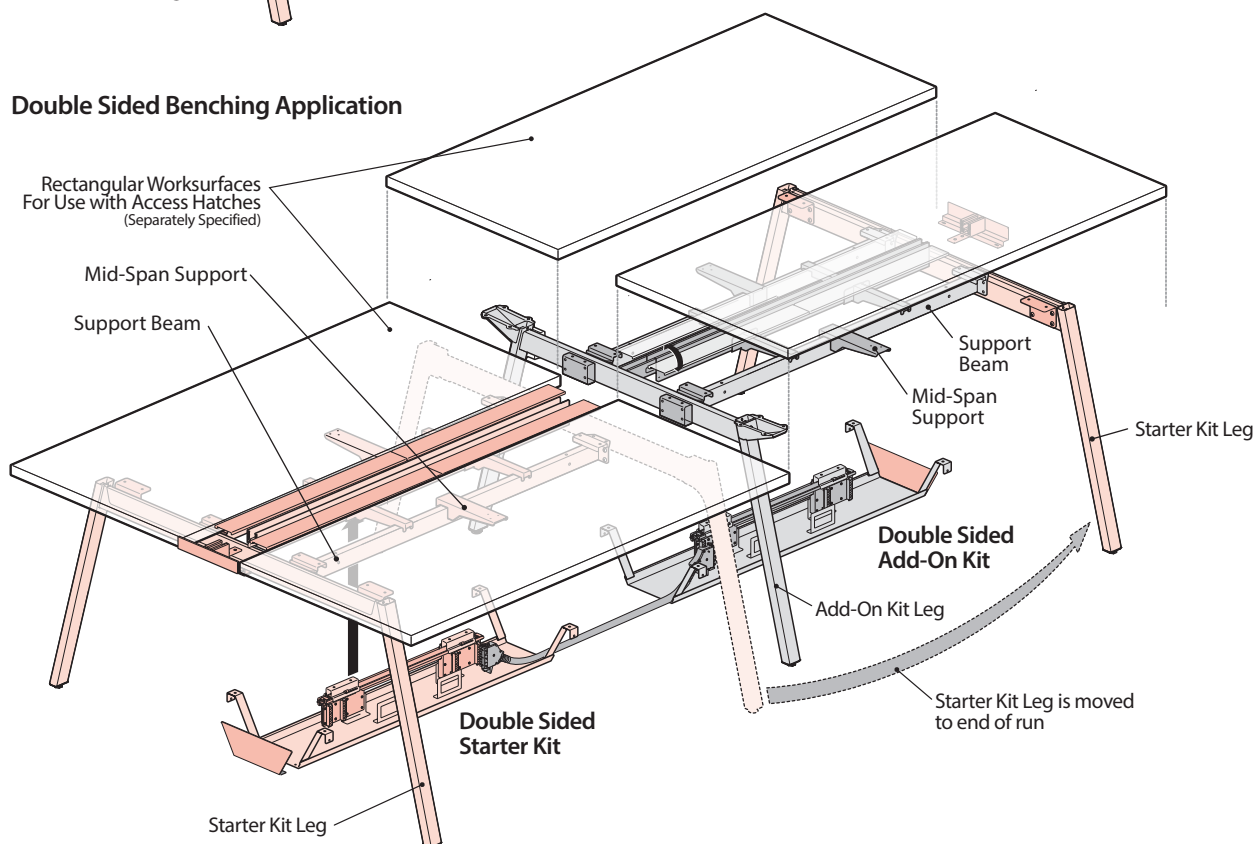



## Product Details – Intuity Benching


### Critical Dimensions for Planning – Single Sided Benching Applications

Intuity Benching applications must adhere to clearance heights when planning lower storage to be located beneath the worksurface, utility tray and support beam.

- 28" high clearance from the underside of the Worksurface to the finished floor with the glide fully retracted.
- 25  $\frac{7}{16}$ " high clearance from the underside of the support beam to the finished floor with the glide fully retracted.
- 21  $\frac{7}{16}$ " high clearance from the underside of the utility tray to the finished floor with the glide fully retracted.


**Note** Straight and Angled Legs are 28" high with glide fully retracted; glide provides a  $\frac{1}{2}$ " leveling adjustment.

Front View

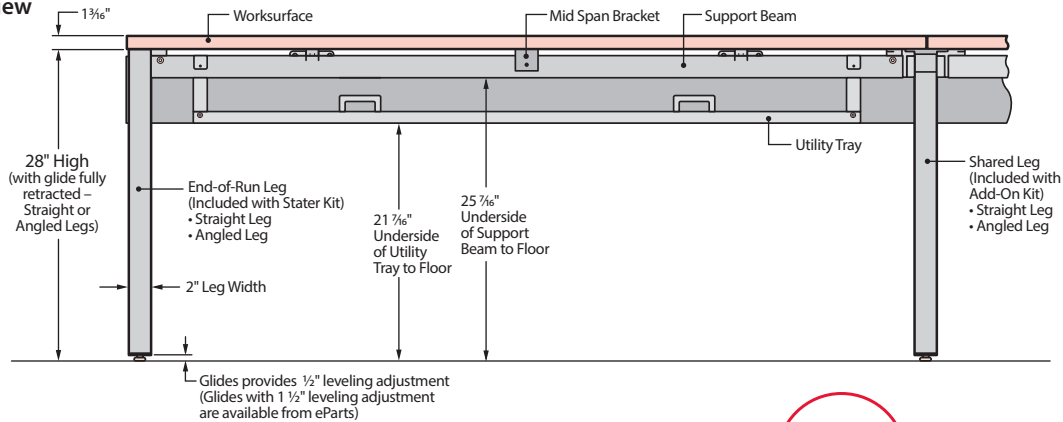


Area of Detail


Single Sided Benching Application (Top View)



Top View – Single Sided Benching Application Without Hatches

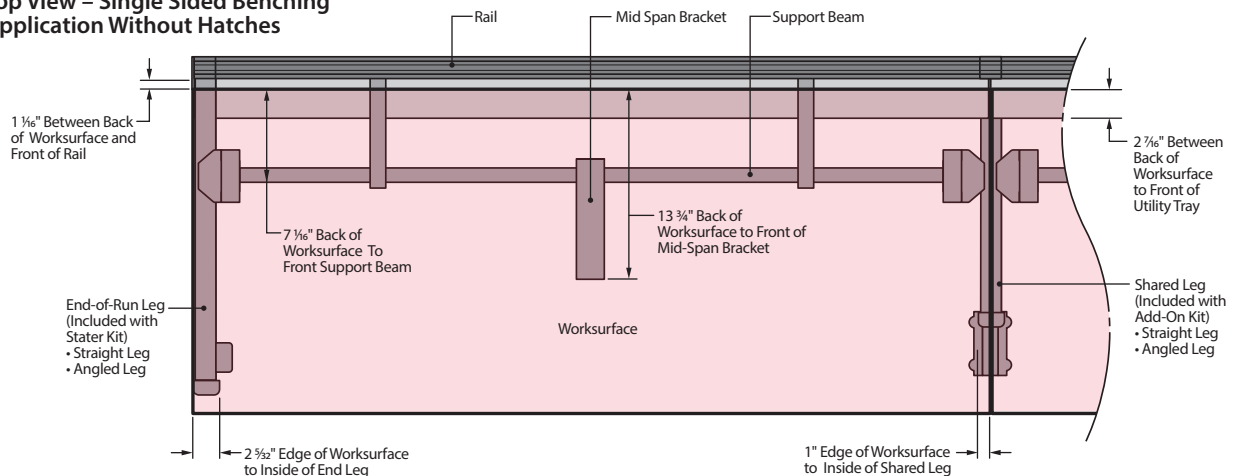

Top View – Single Sided Benching Application With Hatches

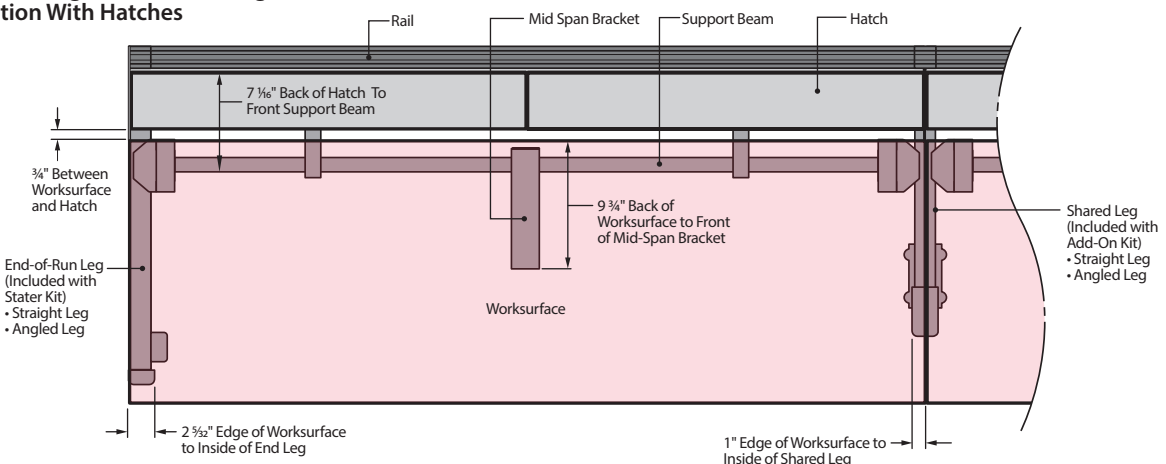





## Product Details – Intuity Benching

### Critical Dimensions for Planning – Double Sided Benching Applications

Intuity Benching applications must adhere to clearance heights when planning lower storage to be located beneath the worksurface, utility tray and support beam.

- 28" high clearance from the underside of the Worksurface to the finished floor with the glide fully retracted.
- 25  $\frac{7}{16}$ " high clearance from the underside of the support beam to the finished floor with the glide fully retracted.
- 21  $\frac{7}{16}$ " high clearance from the underside of the utility tray to the finished floor with the glide fully retracted.

**Note** Straight and Angled Legs are 28" high with glide fully retracted; glide provides a  $\frac{1}{2}$ " leveling adjustment.

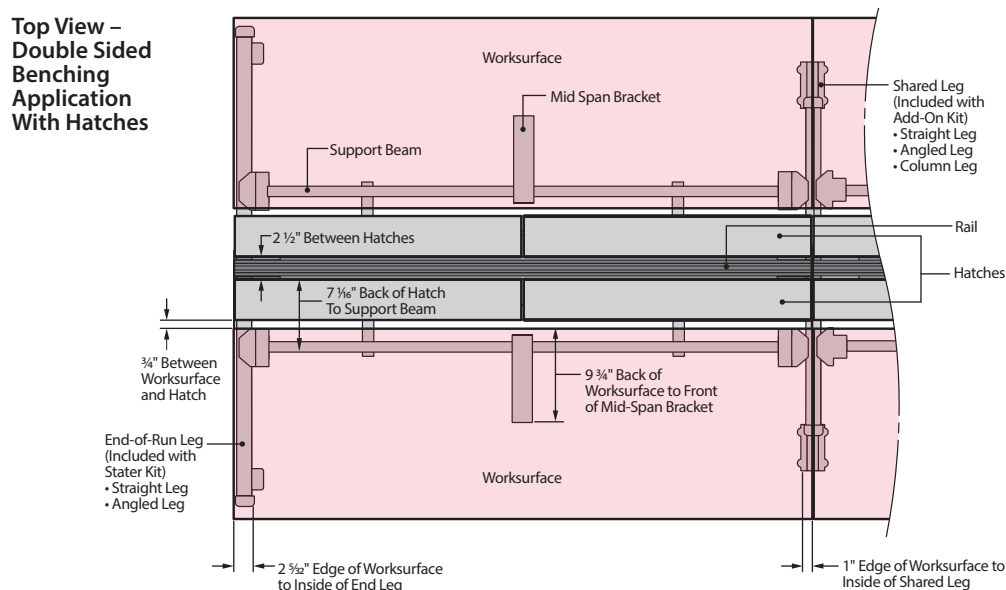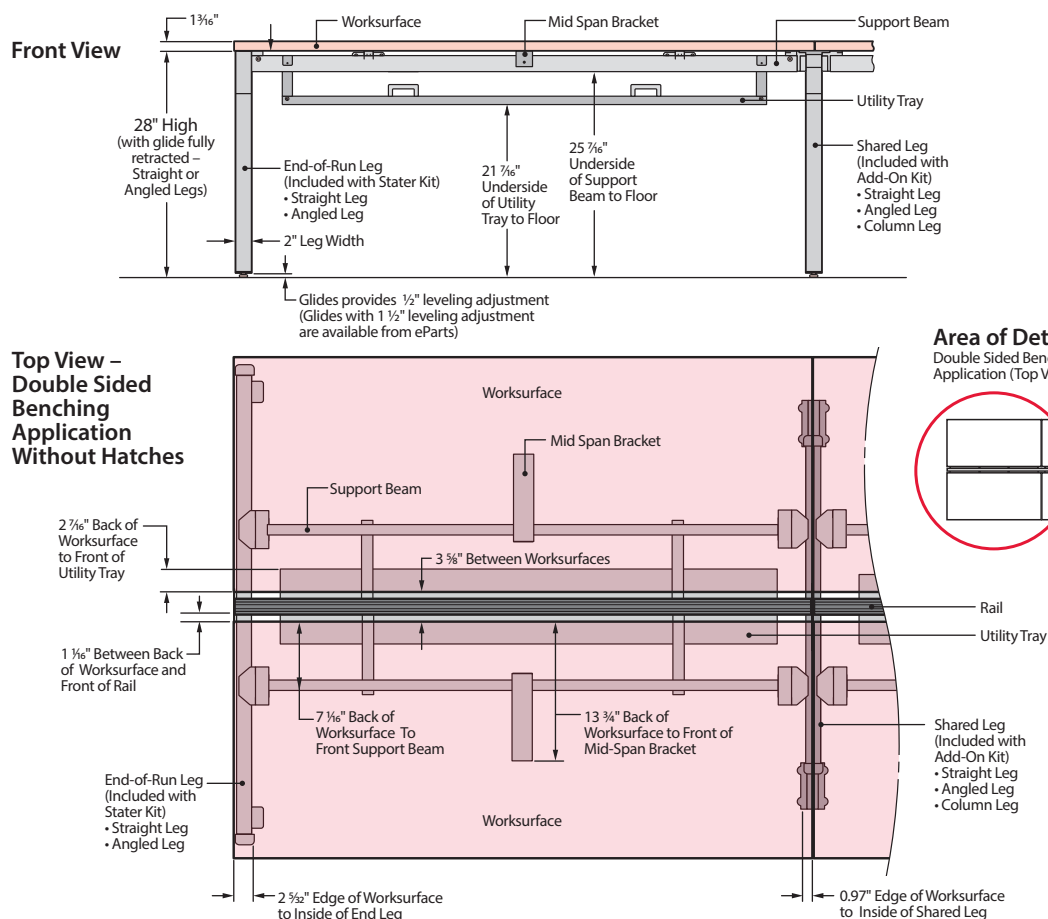


## Product Details – Intuity Benching

### Accessories


#### Access Hatch Gap Filler

- Painted aluminum extrusion used to fill the gap between the Access Hatches of Starter Kits and Add-on Kits.
- Single sided Gap Filler includes one filler piece and the double sided Gap Filler includes two filler pieces
- The Access Hatch Gap Filler is not for use with Starter Kits or Add-on Kits specified without Access Hatches. It is optional for kits specified with Access Hatches, providing a cleaner aesthetic between the Access Hatches.

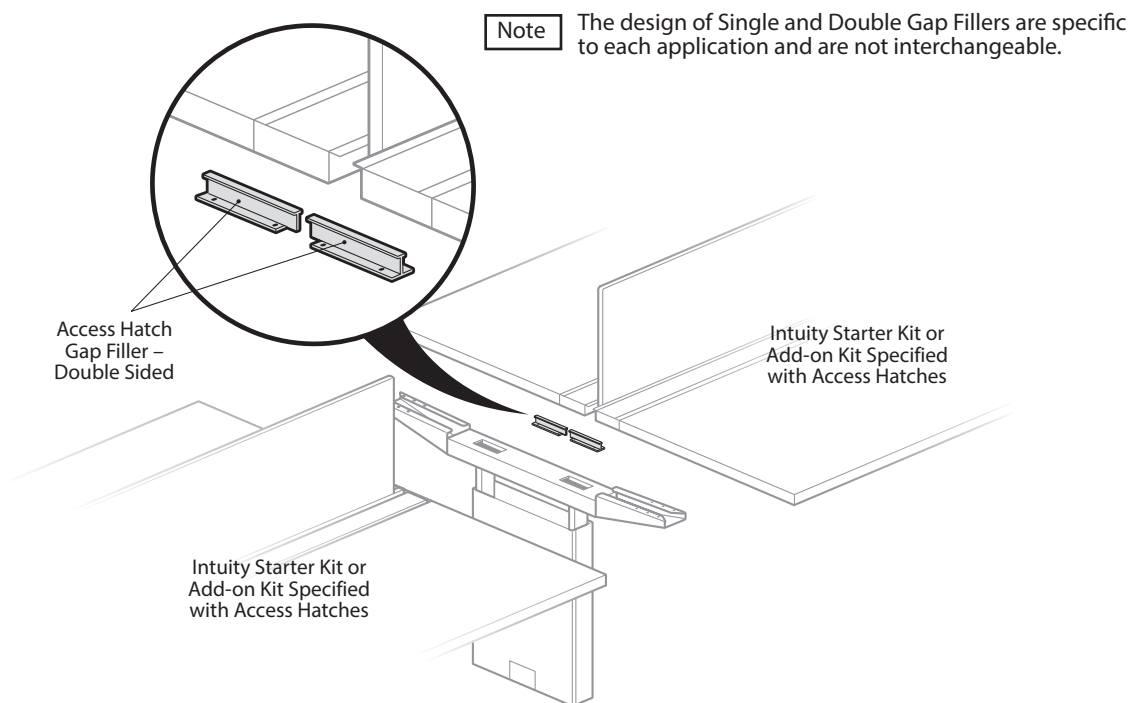

#### Accessory Rail, Bin and Mounting Brackets

- The Accessory Rail and Bin provides additional storage through the Worksurface Access Hatches.
- Single or double sided bracket kits attach to the Rail/Inset Channel to support the Accessory Rail and the Bin. (All Components are separately specified)
- Only for use with Starter Kits or Add-on Kits with Access Hatches.

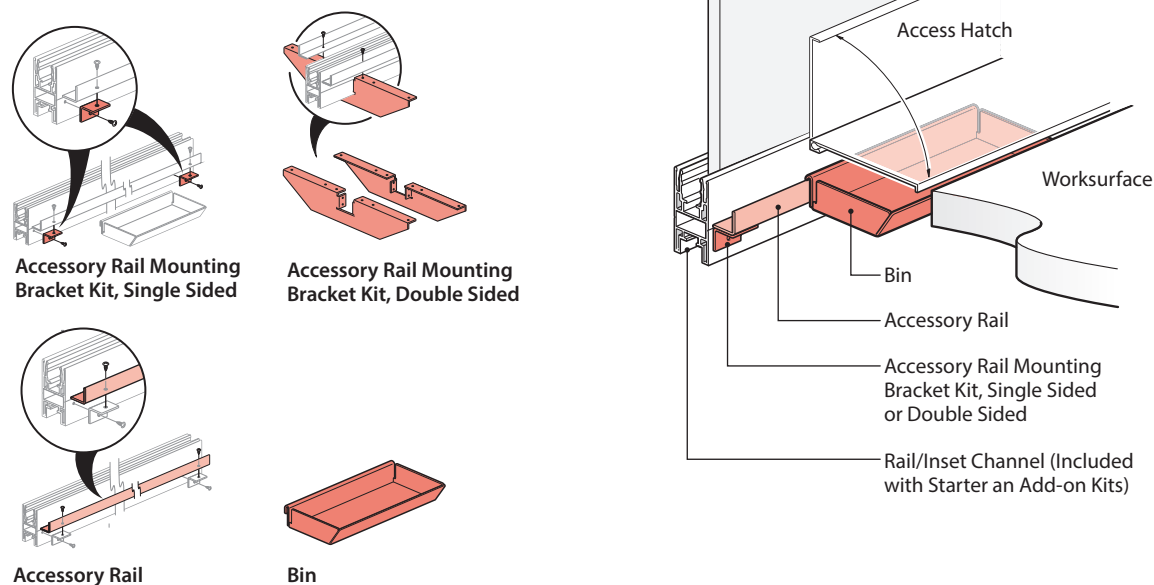


## Product Details – Intuity Benching


### A Series Credenzas – 1.5H

- Intuity Benching may be combined with freestanding A Series Storage Credenzas, as long as they do not interfere with Intuity Benching components (Legs, Utility Tray, Support Beam, etc.).
- A 1.5H A Series Credenzas (21" High with glides fully recessed) may be placed under an Intuity Starter Kit or an Add-on Kit with a Utility Tray (The underside of the Utility Tray is 21  $\frac{7}{16}$ " from the floor, with all glides fully recessed).
- A Series Credenzas should always be freestanding when used with Intuity Benching. Brackets should not be used to attach credenzas to Intuity Benching Applications. Credenzas can not be used to support Intuity Benching.

#### Dimensions – Single Sided Intuity Benching Application with an A Series Credenza

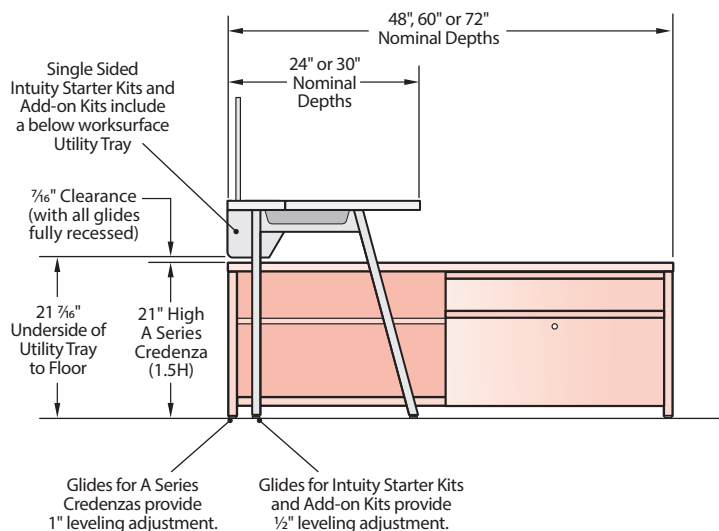

#### Dimensions – Double Sided Intuity Benching Application with an A Series Credenza

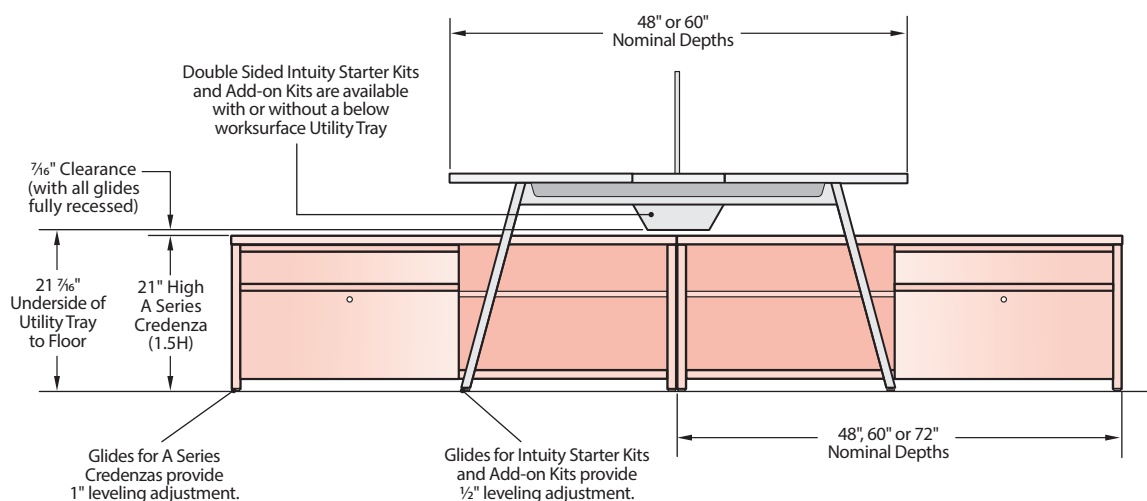

**⚠** The clearance between the Credenza Top and the underside of the Utility Tray is 7/16" with all glides fully recessed. The leveling adjustment range of the A Series Credenza glide is 1", if the glides were fully extended the Credenza Top would interfere with the underside of the Utility Tray.

**Tip** Worksurfaces will interfere with access to Storage Areas when Credenzas are placed under the benching Run. Avoid placing the drawer/door section of a Credenza directly underneath an Intuity Worksurface to avoid access problems.

## Product Details – Intuity Benching

### Electrical Components – Infeed Harness

The Infeed Harness is used to transition building wiring to modular power within the furniture. One end is hardwired to the building wiring and the modular end snaps into the power distribution assembly (PDA) in the furniture. This connection may be used to bring power in from the wall, ceiling, floor or column.

#### Specification Tips


- For use with all Intuity Starter Kits or Add-on Kits equipped with a Power Distribution Assembly (PDA).
- Conduit can be concealed with separately specified Base Feed Cover – Vertical or Cable Chain.
- Cord Manager – Mesh may be separately specified to cover any galvanized metal conduit.
- Conduit can enter the Powered Utility Tray anywhere along the tray.
- Modular connector plugs into receptacle site on left side of the Power Distribution Assembly (PDA) or can attach to a power connector site on right side of PDA.

#### Power Locations:

Floor
Column
Wall

#### Harness Lengths:

87"
180"
300"

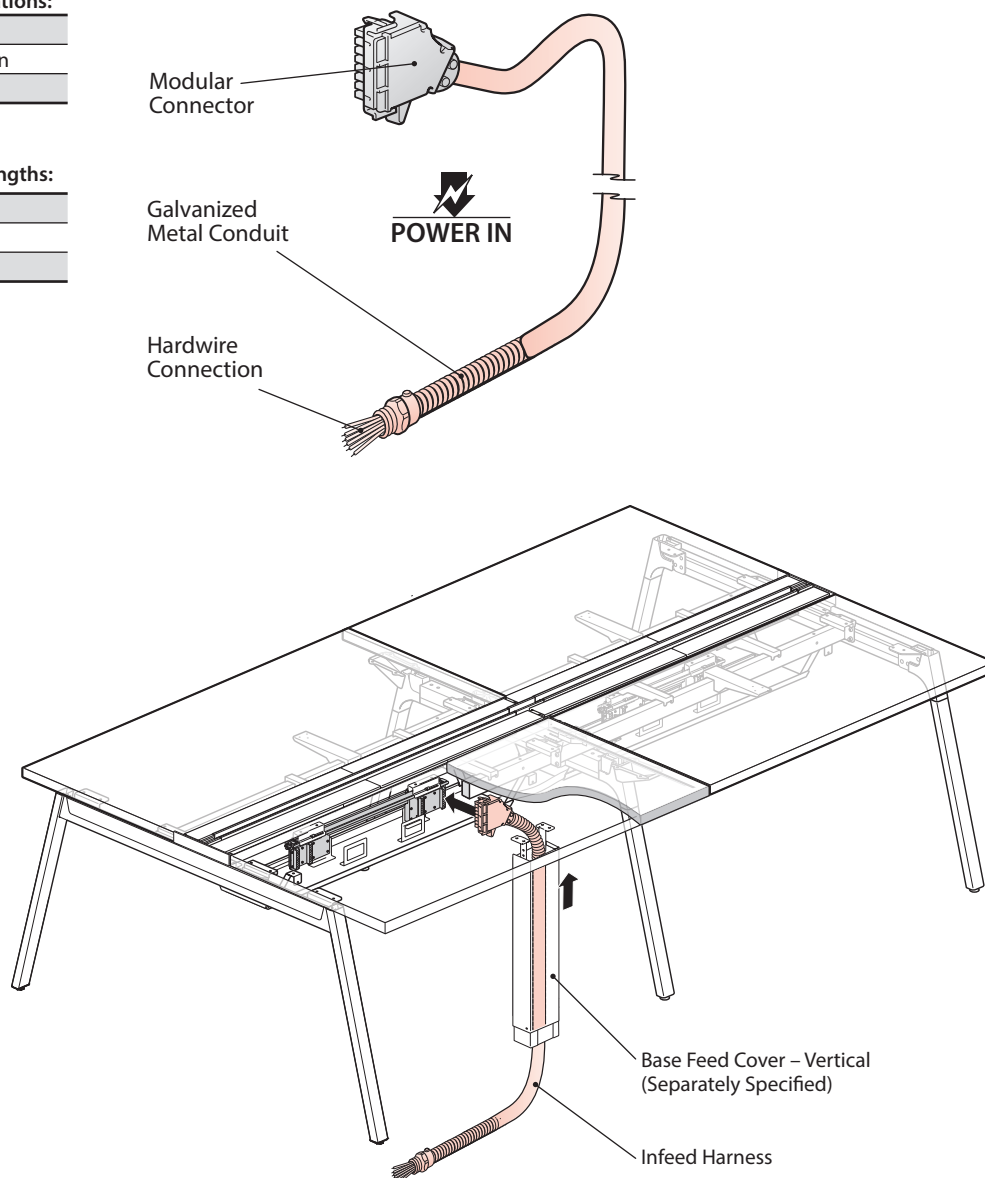

## Product Details – Intuity Benching

### Electrical Components – Base Feed Module: Architectural Concealed Hardwire Connection


The module is used to transition building wiring to modular power within the furniture. The module's junction box is mounted to the furniture and its modular connector snaps into the Power Distribution Assembly (PDA). Field supplied conduit is used to bring power from the building to the junction box, allowing for some versatile applications.

#### Specification Tips

- For use with all Intuity Starter Kits or Add-on Kits equipped with a Power Distribution Assembly (PDA).
- Conduit can be concealed with Separately Specified Base Feed Cover – Vertical, Cable Chain or Column.
- Conduit can enter the Powered Utility Tray anywhere along the tray.
- Modular connector plugs into a receptacle site on left side or can attach to a connector site on right side of PDA.

#### Power Locations:

Floor
Column
Wall

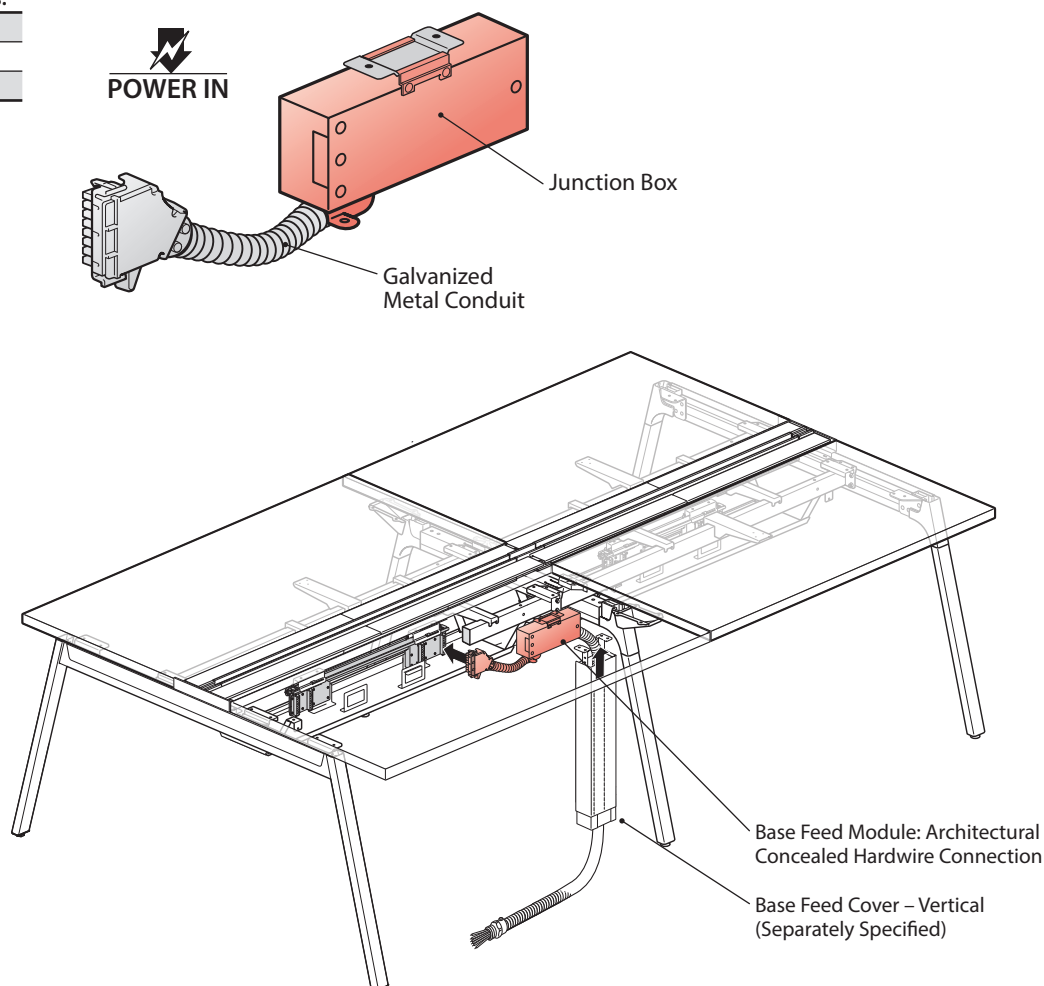

## Product Details – Intuity Benching

### Electrical Components – Internal Power Base™ AI Base Feed

The module is used to make plug-and-play connections between Power Base AI underfloor modular power components and the power distribution assembly (PDA) in furniture.

#### Specification Tips

- For use with all Intuity Starter Kits or Add-on Kits equipped with a Power Distribution Assembly (PDA).
- Can only be connected to Power Base AI underfloor power system.
- Attaches at receptacle or right hand power connector site on PDA and to a Power Base AI underfloor power system.
- Conduit can be concealed with separately specified Base Feed Cover – Vertical, Cable Chain or Column.
- Cord Manager – Mesh may be separately specified to cover any galvanized metal conduit.
- Conduit can enter the Powered Utility Tray anywhere along the tray.

#### Power Locations:


Power Base AI

#### Lengths:

64"

144"

300"

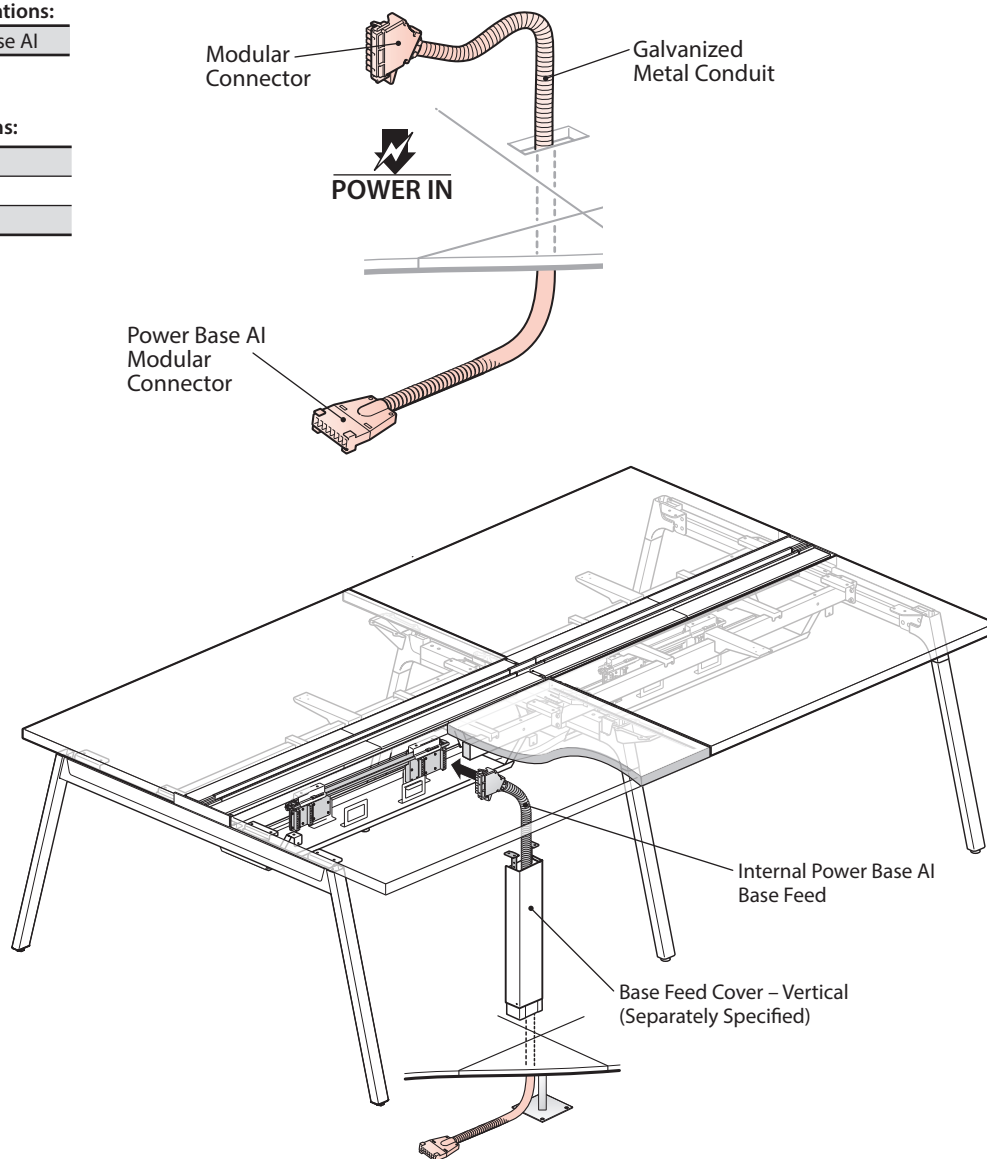

## Product Details – Intuity Benching


### Electrical Components – Top Feed

The Top Feed mounts to a worksurface and routes power and communications cabling from the ceiling to the Utility Tray in the furniture.


#### Specification Tips

- For use with Intuity Benching applications equipped with Powered Utility Tray(s).
- Floor Mount Top Feed anchors to floor and the ceiling and back of worksurface.
- Modular connector plugs into receptacle or right hand power connector site on Power Distribution Assembly (PDA).
- Wire harness length is 180" (4572 mm) regardless of pole length.
- Conduit can enter the Powered Utility Tray anywhere along the tray.

#### Single Sided Application


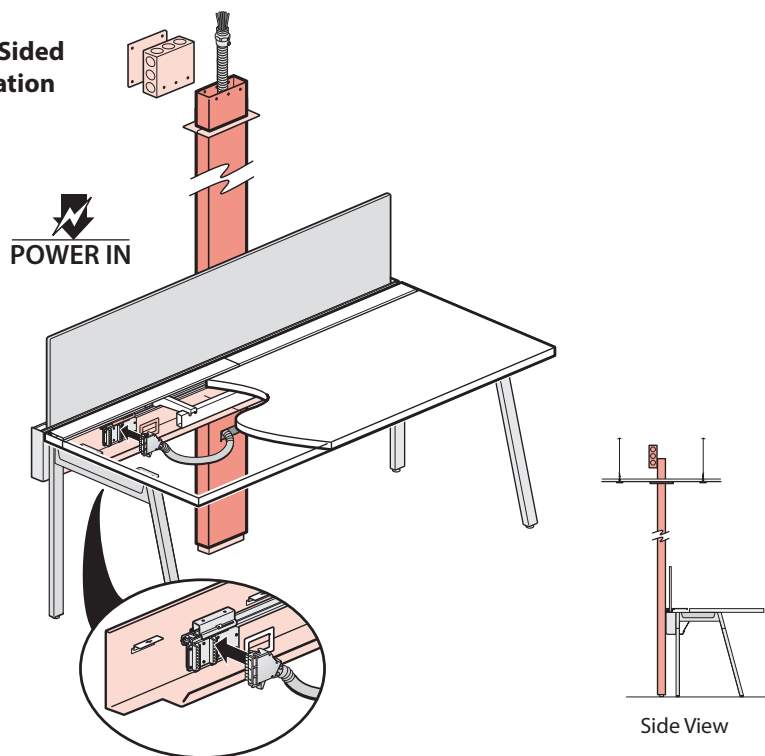


#### Double Sided Application

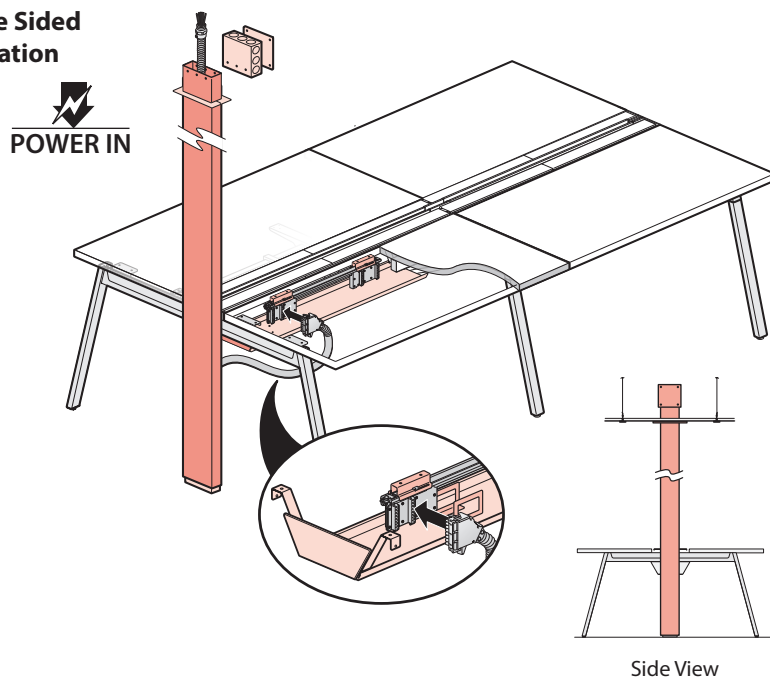

#### POWER LOCATION

- 10' and 12' Ceilings

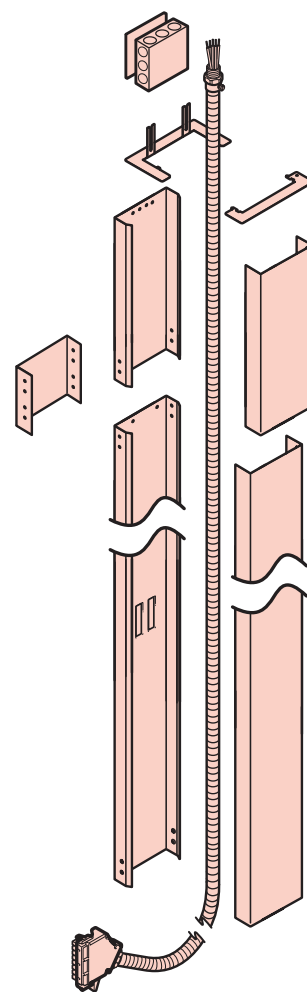

**Floor Mount**  
Must be anchored to floor with field supplied fasteners.



Product Details – Intuity Benching

Electrical Components – Utility Tray Power Retrofit Kit

Intuity Starter Kits or Add-on Kits with Utility Trays may be specified as powered (includes PDA) or non-powered (doesn't include PDA). Non-powered Utility Trays may be converted to powered Utility Trays by field installing a separately specified Utility Tray Power Retrofit Kit.

Specification Tips


- When adding retrofit kit, order PDA mounting brackets, service part #2305-8603, separately.

Power Location:
Inside
Non-Powered
Utility Trays




Lengths:
48"
54"
60"
66"
72"

Single Sided Utility Tray  
(Included with all Single Sided Starter Kits and Add-on Kits)

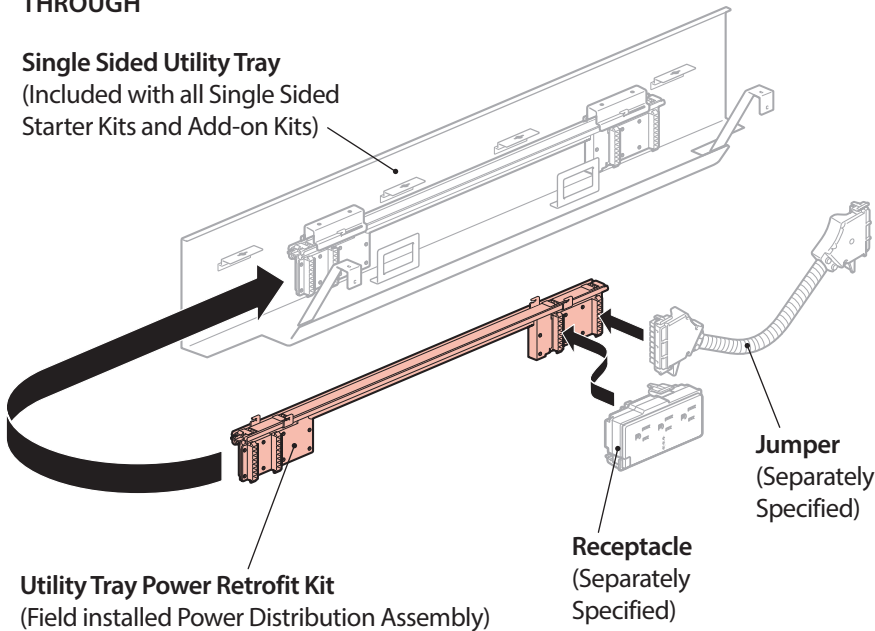

Double Sided Utility Tray  
(Optional with all Double Sided Starter Kits and Add-on Kits)

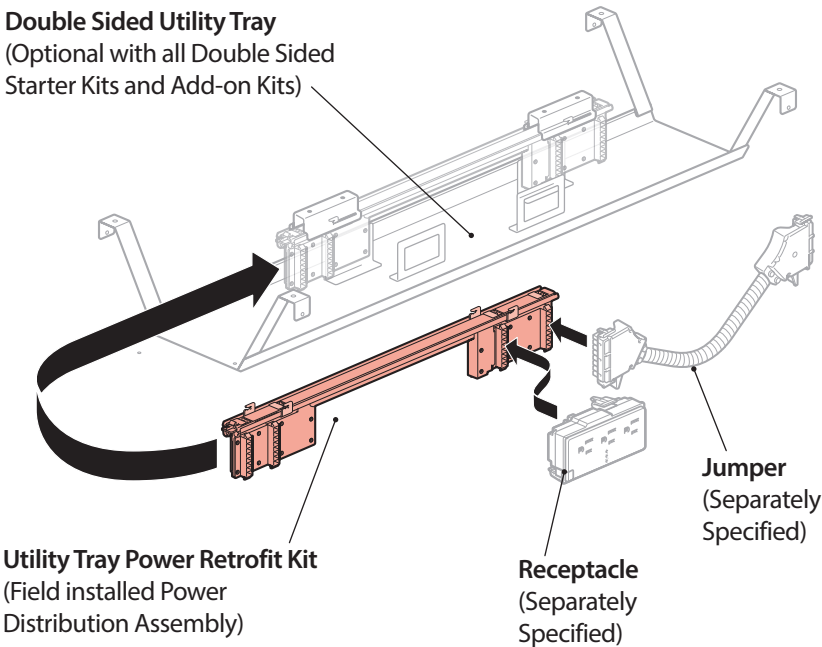

**Note** • Do not mix 3-Circuit and 4-Circuit components.




## Product Details – Intuity Benching


### Electrical Components – Power Distribution Assembly

To distribute power through the Utility Tray an Optional **Power Distribution Assembly (PDA)** is required. The PDA is used to connect all other electrical components. The PDA has two power connector sites at each end. The power connector sites on a PDA provide for the connection of connectors or some infeeds. The receptacle sites are used for receptacles and the connection of infeeds.

#### Single Sided Utility Tray – (included with Intuity Single Sided Starter Kits and Add-On Kits)

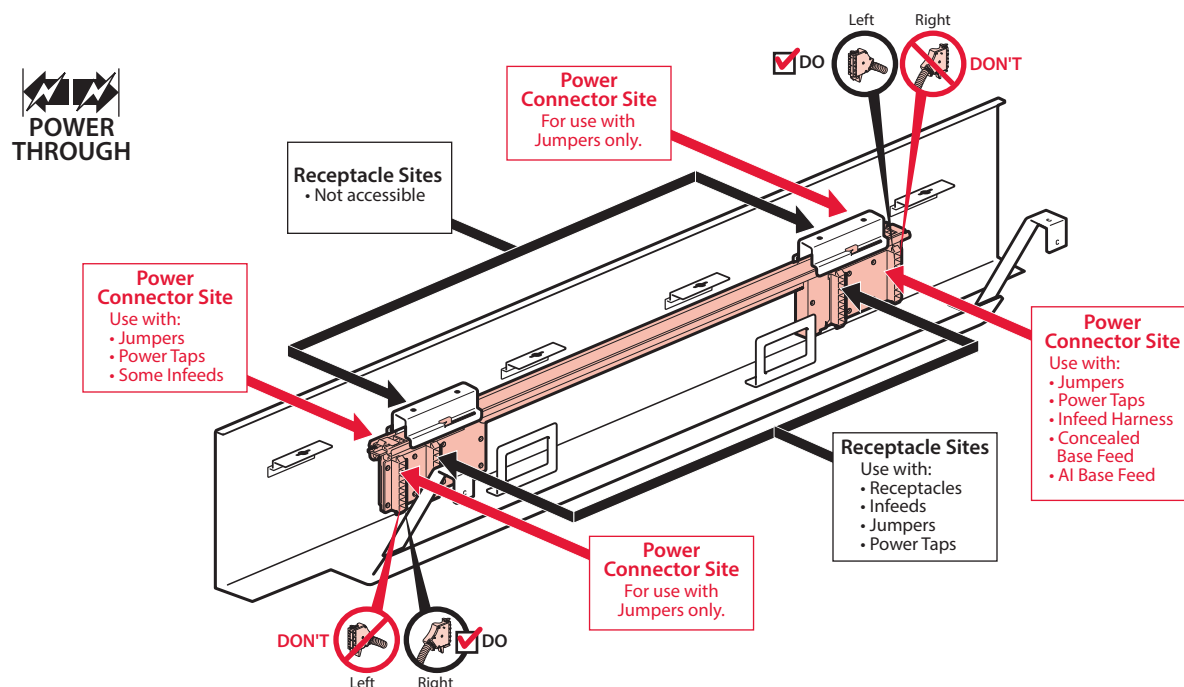

#### Double Sided Utility Tray – (Optional with Intuity Double Sided Starter Kits and Add-On Kits)

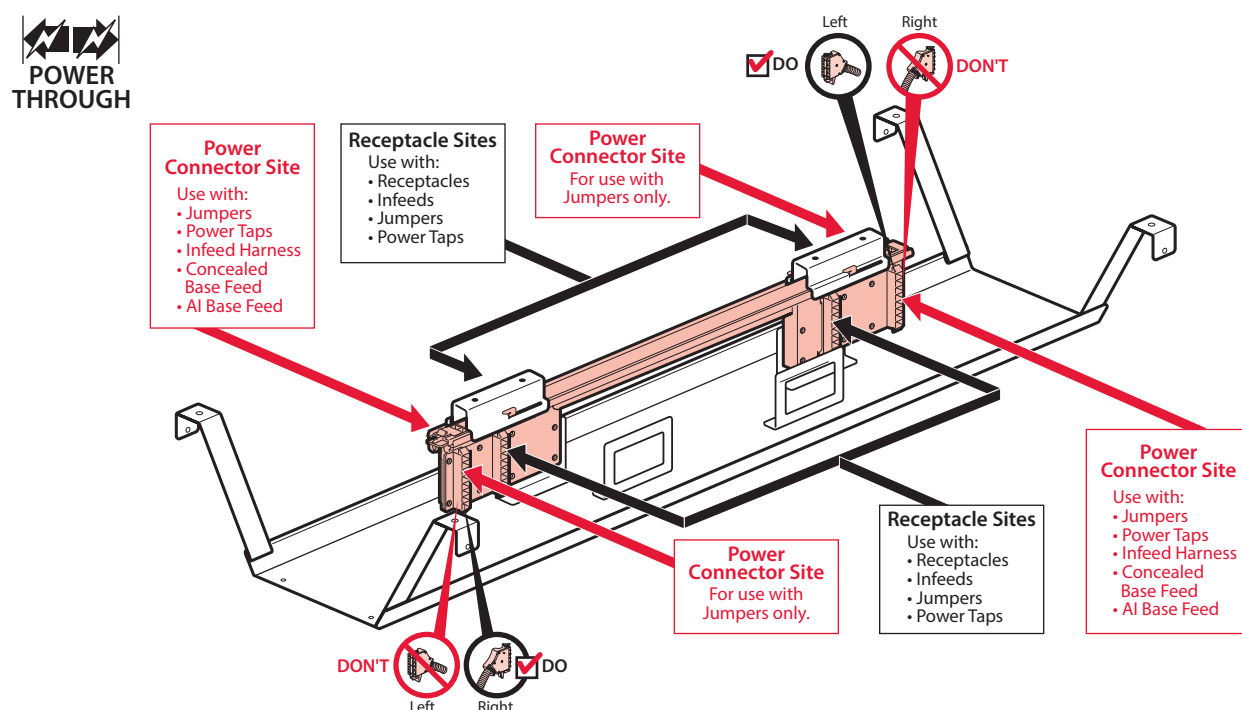

**Note** • Do not mix 3-Circuit and 4-Circuit components.

## Product Details – Intuity Benching

### Electrical Components – Jumpers – Power Connectors


Jumpers are for use in Intuity product reconfigurations to connect between Power Distribution Assemblies (PDAs) mounted in the Utility Trays of Starter Kits and Add-on Kits.

#### Specification Tips


- One Jumper is included with powered Add-on Kits.
- Jumpers may be field installed in Power Connector Sites or Receptacle Sites on the Power Distribution Assemblies (PDAs).
- Common planning length: in-line connections between a Starter Kit and an Add-on Kit or between an Add-on Kit and another Add-on Kit requires a 24" long Jumper (Kits must be specified with a powered Utility Tray).

Power Location: Between Powered Utility Trays	
Intuity Application	Common Jumper Planning Length:
Between a Starter Kit and an Add-on Kit	Requires a 24" Long Jumper
Between a Add-on Kit and an Add-on Kit	Requires a 24" Long Jumper


- Tips**
- Jumpers cannot be coupled together.
  - Jumpers are sized specific to the application.

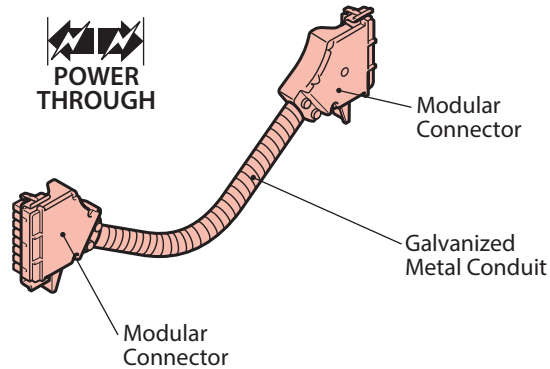

#### Single Sided Utility Trays (Included with all Single Sided Starter Kits and Add-on Kits)

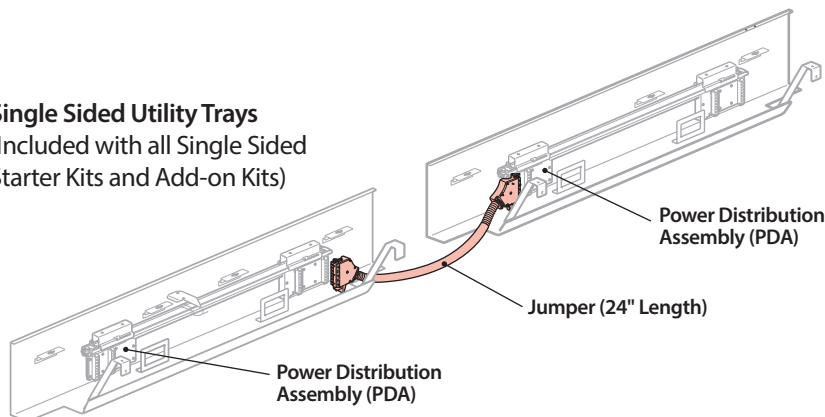

#### Double Sided Utility Tray (Optional with all Double Sided Starter Kits and Add-on Kits)

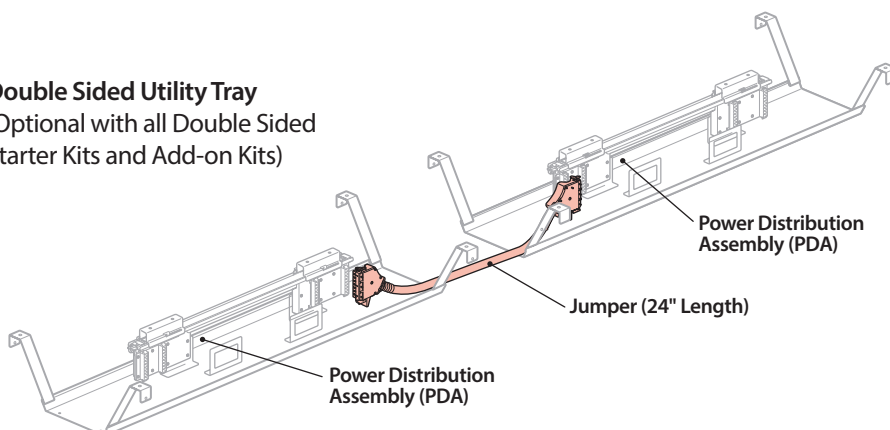


**Note** • Do not mix 3-Circuit and 4-Circuit components.

Product Details – Intuity Benching


Electrical Components – Receptacles

Receptacles attach to the Power Distribution Assembly (PDA) to allow access to the circuits carried through a Utility Tray. The 3-Circuit 15 Amp receptacles have a circuit programmable feature that allows each receptacle to access either circuit 1, 2, or 3 in the field by simply sliding the connector to one of three positions.

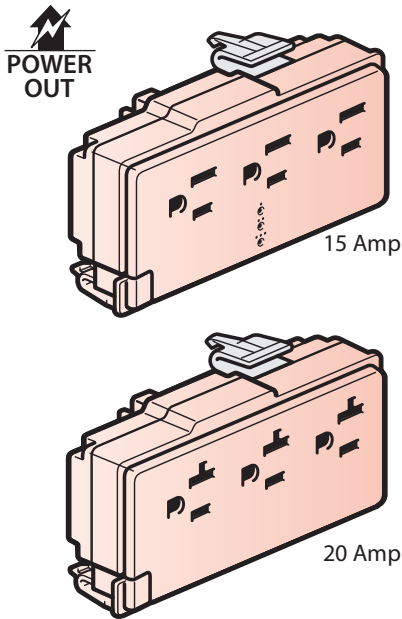


Specification Tips

- 15 Amp receptacle configuration is NEMA 5-15R.
- 20 Amp receptacle configuration is NEMA 5-20R.
- 3-Circuit 20 Amp and 4-Circuit receptacles have fixed circuit access and are not field programmable.
- Specify appropriate number of receptacles for each circuit.
- Specify common ground or isolated ground.



3-Circuit 15 Amp Programmable Receptacle




3-Circuit 20 Amp and 4-Circuit (2+2 / 3+1) 15 and 20 Amp Receptacles


**Note** • Do not mix 3-Circuit and 4-Circuit components.

POWER CONFIGURATION	RECEPTACLE IDENTIFIER			
4 Circuit 2 + 2	1	2	3	4
4 Circuit 3 + 1	A	B	C	D
3-Circuit (20 Amp)	I	II	III	NA

Single Sided Utility Trays  
(Included with all Single Sided Starter Kits and Add-on Kits)

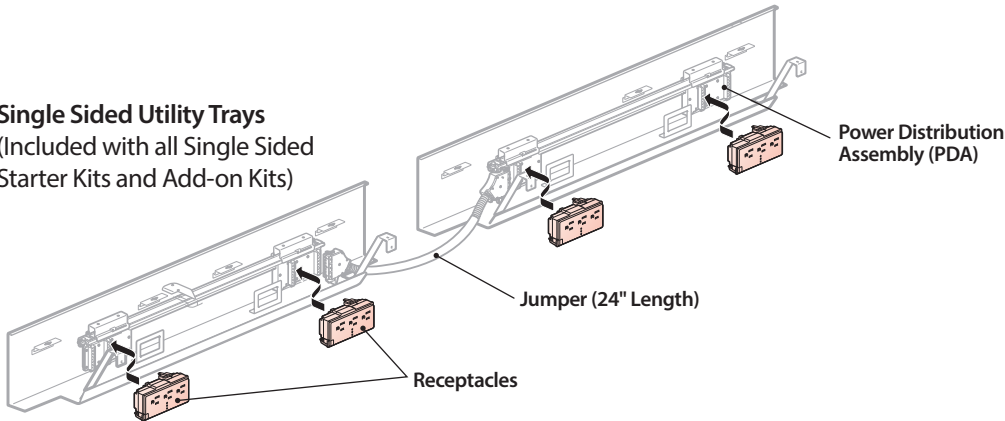

Double Sided Utility Tray  
(Optional with all Double Sided Starter Kits and Add-on Kits)

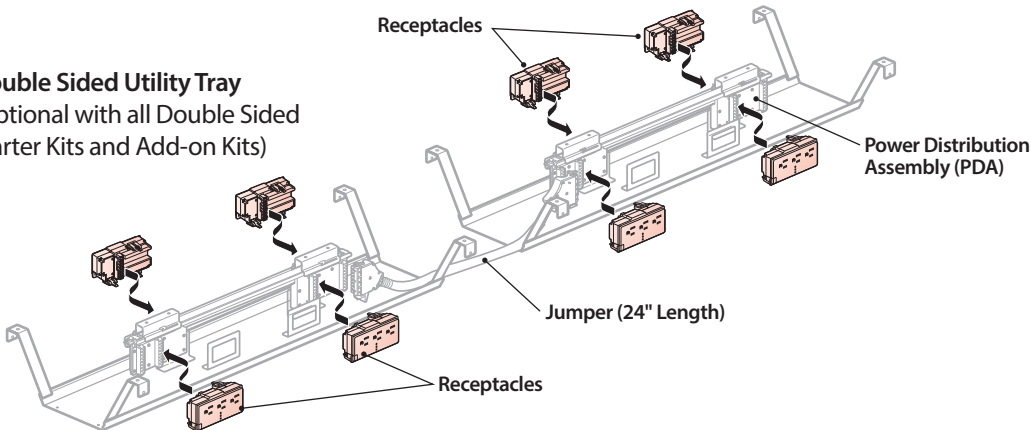

## Product Details – Intuity Benching



### Electrical Components – Power Taps

Power Taps provide three 15A receptacle outlets in a housing that can attach to a separately specified Power Tap Bracket. Power Tap Brackets can be mounted to the edge or bottom of a worksurface.

#### Specification Tips

- 15 Amp receptacle configuration is NEMA 5-15R.
- Specify appropriate number of Power Taps for each circuit.
- Required mounting bracket is separately specified.
- Available in conduit (3- or 4-circuit), hardwire and corded versions.

**Note** Power Tap applications should be reviewed by local authorities (electrical inspector) prior to ordering due to varying local codes.

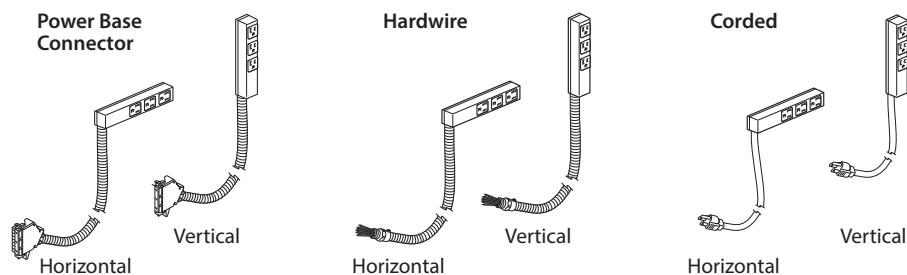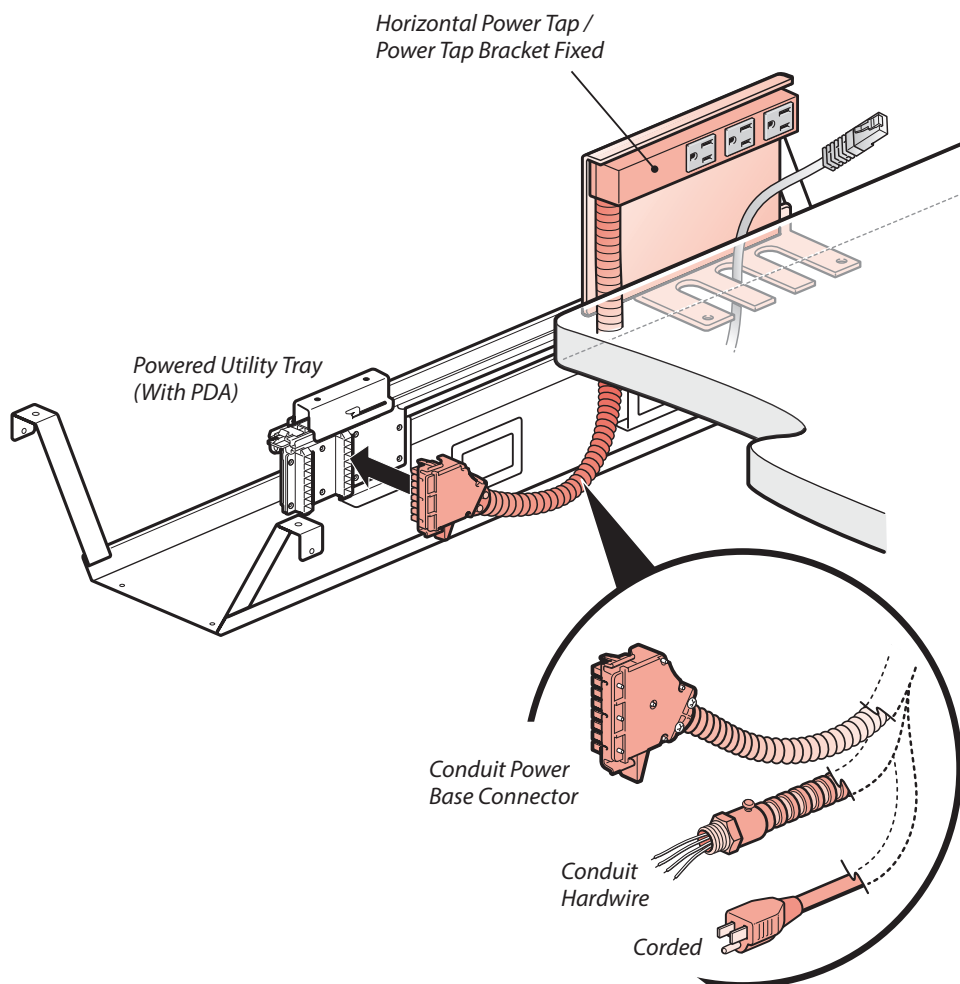


## Product Details – Intuity Benching

### Electrical Components – Power Tap Brackets

Power Taps require a separately specified Power Tap Bracket to attach to worksurfaces. Brackets allow access above or below the worksurface.


#### Above The Worksurface Applications

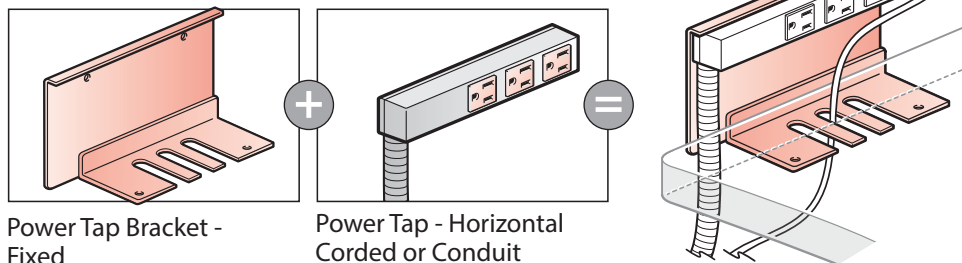

Power Tap Bracket - Fixed

Power Tap - Horizontal Corded or Conduit


**Note** Power Tap Bracket – Fixed may be used with Intuity Benching applications with or without Access Hatches.

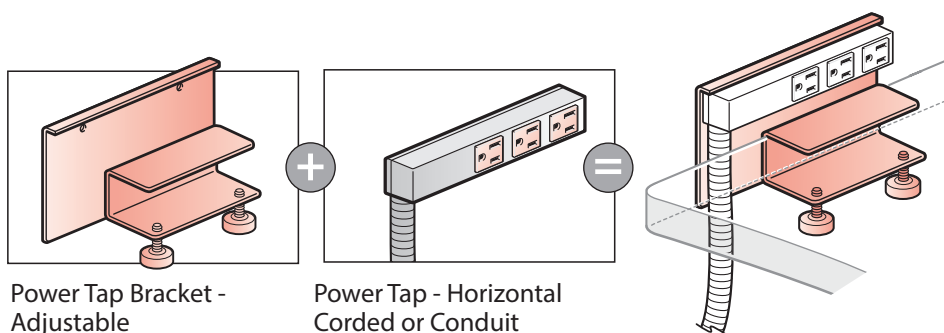

Power Tap Bracket - Adjustable

Power Tap - Horizontal Corded or Conduit

**Note** Power Tap Bracket – Adjustable may only be used with Intuity Benching applications without Access Hatches.

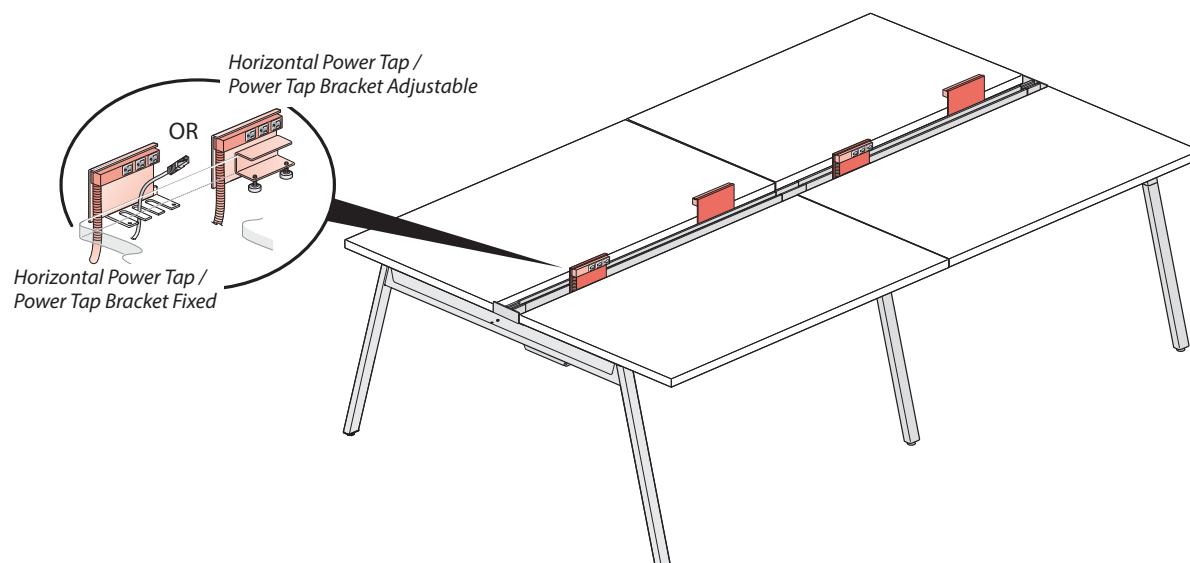


**Note** 120° applications specified with a wireway will limit available mounting locations for Power Tap Brackets.

## Product Details – Intuity Benching


### Electrical Components – Enhanced Power Module

- The Enhanced Power Module is designed to deliver electrical and data access, and may be specified corded with a plug or hardwired.
- Requires separately specified brackets, that accommodate 1 3/16" (30 mm) to 2" (51 mm) thick worksurfaces and provide above or below the worksurface power access.

Enhanced Power Module –  
Corded With Plug

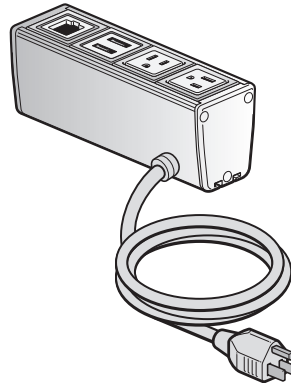


Enhanced Power Module –  
Hardwire

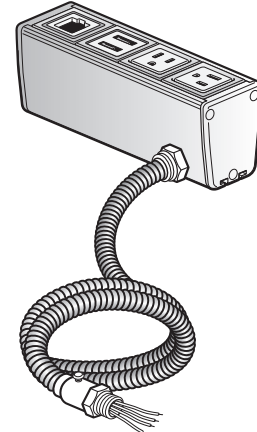


#### Above The Worksurface Applications

Enhanced Power Module Bracket –  
Above Worksurface Fixed

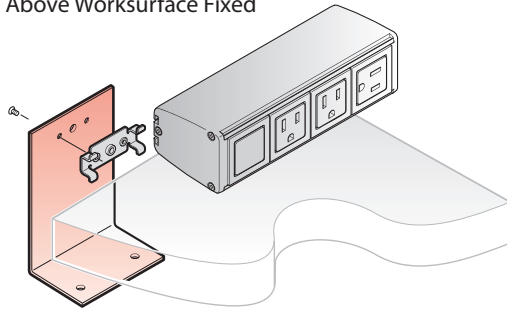

**Note** Enhanced Power Module Bracket – Above Worksurface Fixed may be used with Intuity Benching applications with or without Access Hatches.


Enhanced Power Module Bracket –  
Above Worksurface Adjustable

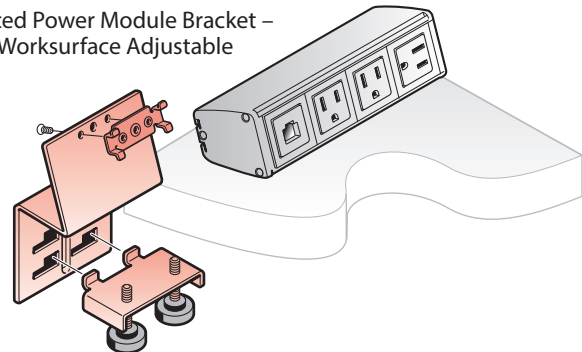

**Note** Enhanced Power Module Bracket – Adjustable may only be used with Intuity Benching applications without Access Hatches.

#### Below The Worksurface Applications

Enhanced Power Module Bracket –  
Under Worksurface Fixed

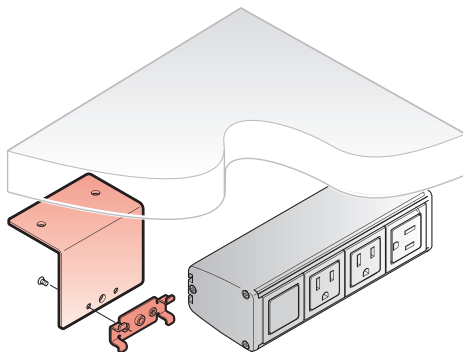

**Note** Enhanced Power Module Bracket – Under Worksurface Fixed may be used with Intuity Benching applications with or without Access Hatches.








## Product Details – Intuity Benching

### Cable Management – Cable Capacities

This chart shows the number of communication cables that can be routed through specific pathways. Cable capacities are based on 0.20" (5 mm), 0.25" (6 mm), and 0.30" (8 mm) diameter cables at 60% and 40% fill capacity. TIA/EIA 569 suggests a cable fill of 40% for planning and up to 60% for unplanned or future additions. The TIA category designations for cable are not size specific but typically the higher the category number the larger the diameter the cable is. As a general rule a Category 5e (Enhanced) cable is approximately 0.20" in diameter, the Category 6 0.25", and a Category (Augmented) 0.30". The actual diameter will vary depending on manufacturer and whether it is a plenum rated cable or riser (PVC) cable.

	Cable Pathway Area		Cable Capacity					
	Square Inches	Square mm	60% Fill			40% Fill		
			0.20"(5 mm)	0.25"(6 mm)	0.30"(8 mm)	0.20"(5 mm)	0.25"(6 mm)	0.30"(8 mm)
<b>Example</b>	1.0	645	19	12	8	13	8	6
① Double Sided Utility Tray	13.25	8548	251	159	106	172	106	79
② Single Sided Utility Tray	5	3226	95	60	40	65	40	30
③ Base Feed Cover	7.1	4581	135	85	57	92	57	43
④ Double Sided Add-On Kit with Column Leg	10	6451	190	120	80	130	80	60
⑤ Top Feed	7.4	4774	141	89	59	96	59	44

**Note** • Mock-up of cables is more accurate than these mathematical calculations due to rounding error.

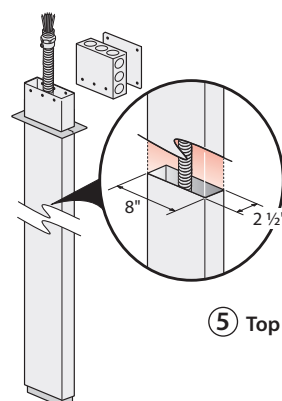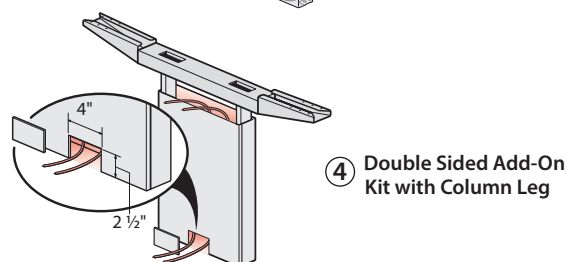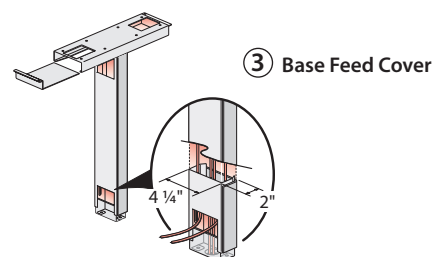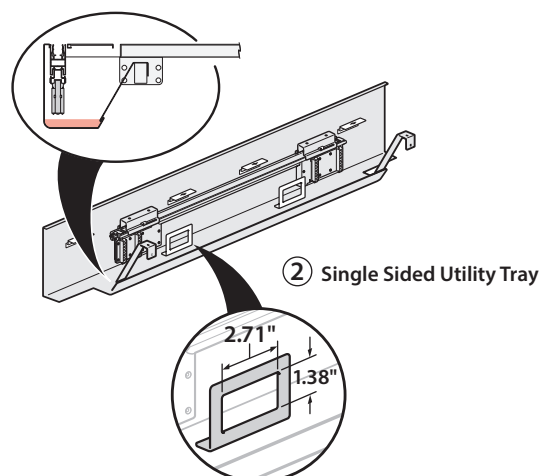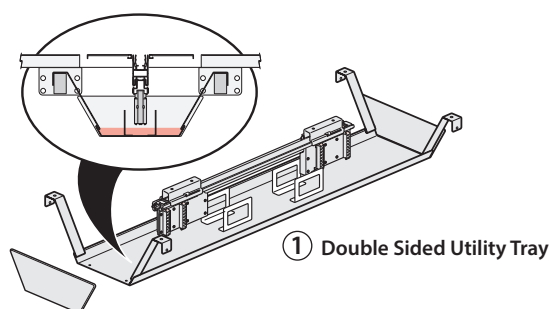


# Product Details – Intuity Benching

## Hardwired Applications – Power Distribution

Hardwire power applications are designed to address non-modular power planning solutions.

- 1. Power distribution from building-to-furniture.
- 2. Vertical power distribution.
- 3. Horizontal power distribution.

Location	Lengths
1 Base Feed	48" (1219 mm) or as required
2 Top Feed	Ceiling Height (H) + 18" (457 mm)
3 Between two junction boxes on one table	Panel Width (W) – 32" (812.8 mm)
4 Across Table connection	24" (609.6 mm)

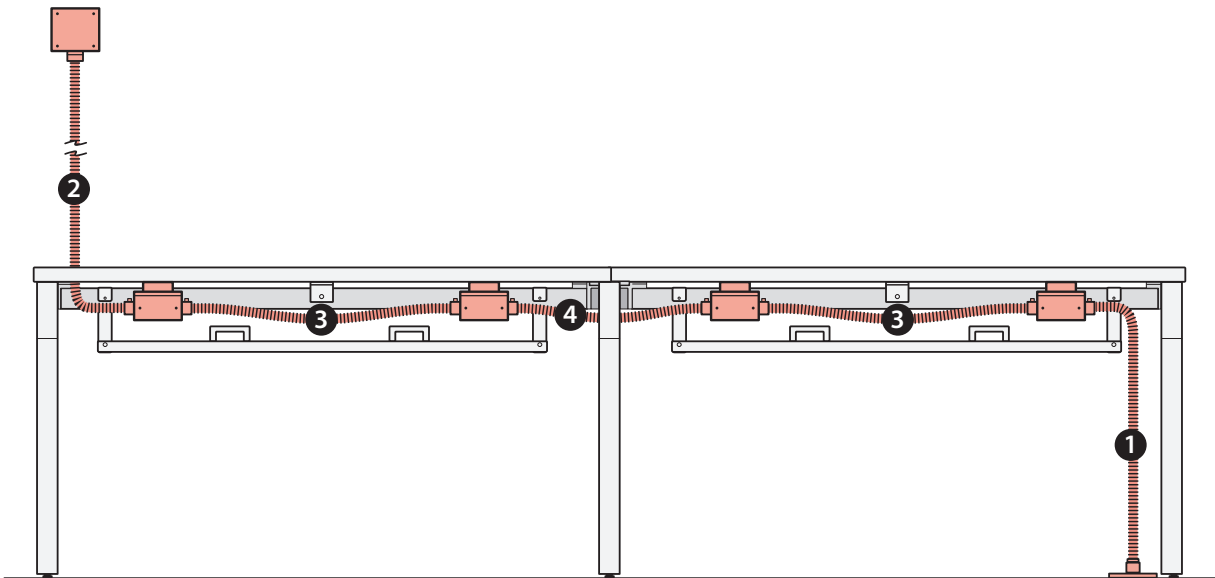

**Note**

- Starter Kit / Add-On Kit Hardwire power options (C):
  - Single Sided option includes two junction boxes; conduit is field supplied.
  - Double Sided option includes four junction boxes; conduit is field supplied.



**This page intentionally left blank.**


## Product Application – Intuity Benching

## Product Application – Intuity Benching

### Planning Model – Single Desk and In-Line Benching Applications


Intuity benching may be used as a single standalone desk or an in-line Benching application with multiple rectangular worktops to define linear space in an open plan environment.

#### ✓ Do Single Desk Application (plan view)




#### ✓ Do In-Line Benching Application (plan view)

Single Sided – Benching Application



Double Sided – Benching Application

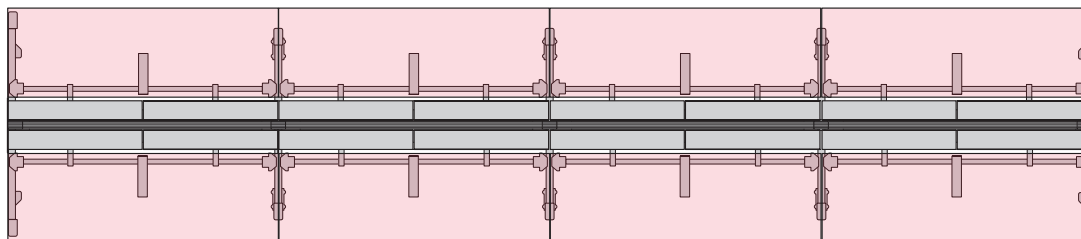

#### Note


- For storage needs, units must be freestanding/mobile; if used in a nested application verify the storage height is applicable and will clear any below worksurface obstructions.
- Intuity Kits do not provide the required support and load support needs for Integrated Palette product applications except for the following:
  - Belong Rail Mounted Screens and Work Tool Accessories
  - Select Active Component products. Refer to the Active Components Price List and Specification Guide for Product application guidelines.

## Product Application – Intuity Benching


### Single Sided Application / Starter Kit

Every application begins with a Starter Kit.

#### Single Sided Starter Kit

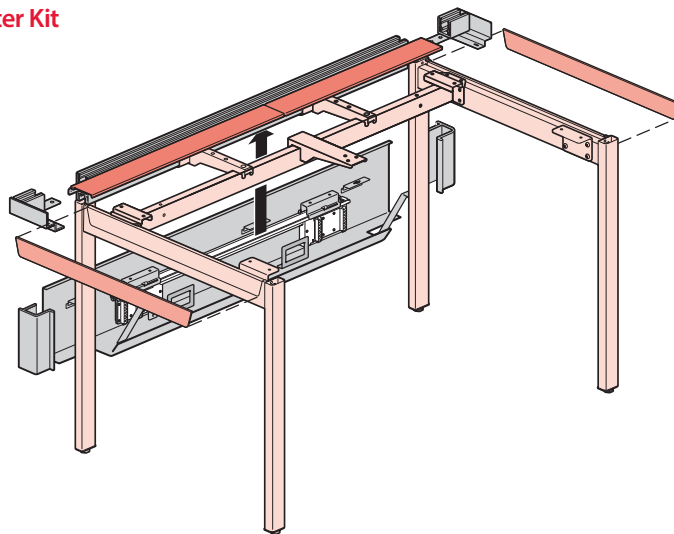

#### Single Sided Starter Kit – In-Line Benching Application

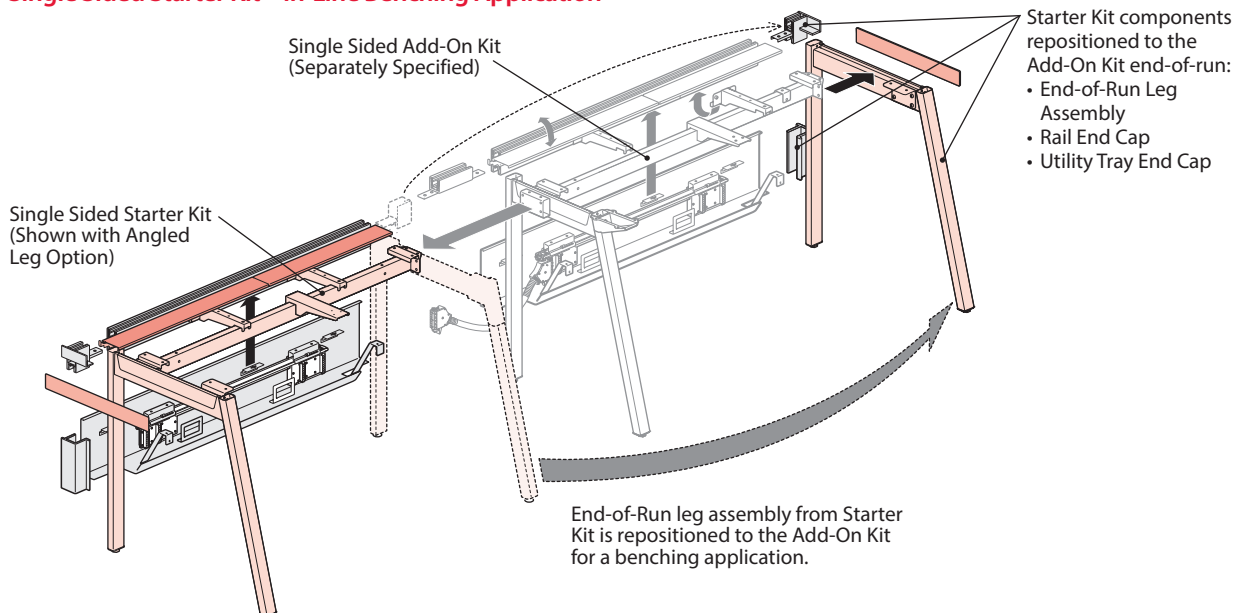


- Note**
- Intuity Worksurfaces must be separately specified.
  - Worksurface access hatches are optional for Rectangular Worksurfaces; specified and shipped with Starter Kit or Add-On Kit.
  - Single Sided Kits are standard with an integrated below-worksurface Utility Tray.

## Product Application – Intuity Benching


### Single Sided Application / Add-on Kit

Add-On Kit(s) is always used with a Starter Kit. Add-On Kits are available single or double sided.

#### Single Sided Add-On Kit

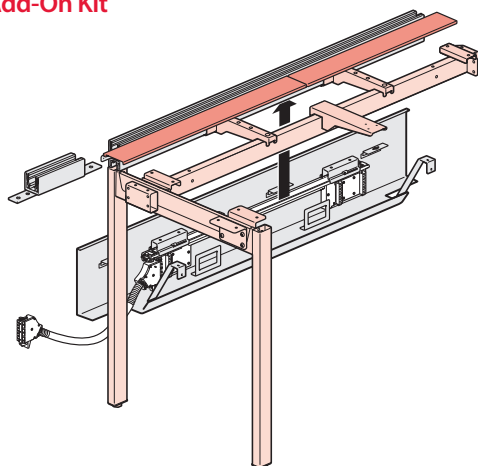

#### Single Sided Add-On Kit – In-Line Benching Application

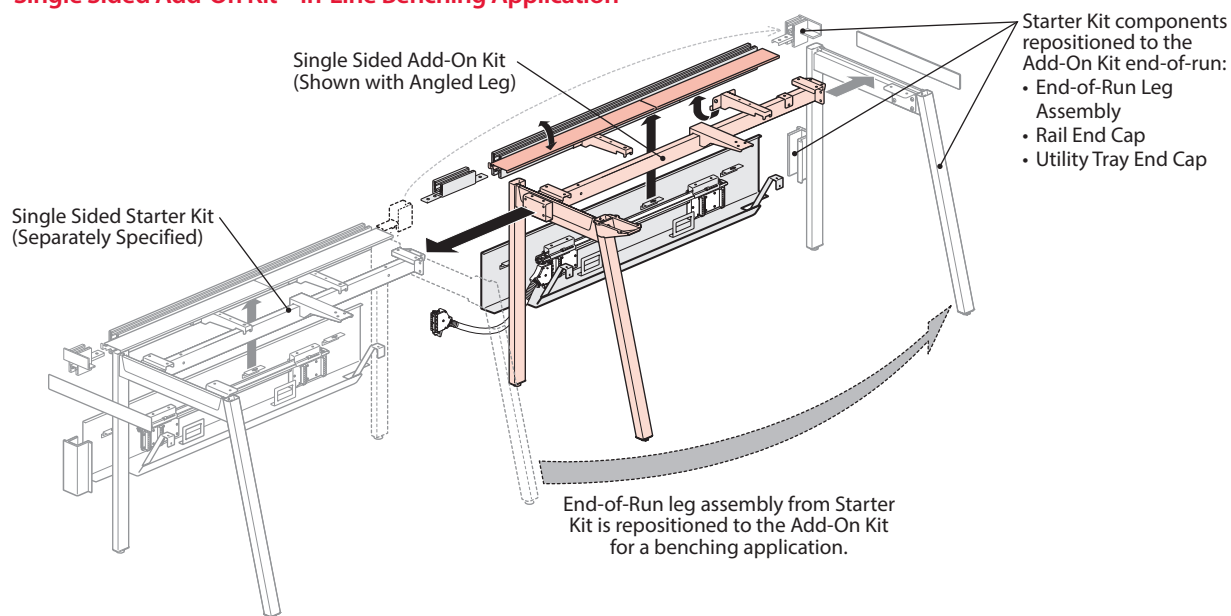


**Note** • Single Sided Kits are standard with an integrated below-surface Utility Tray. The Power Distribution Assembly (PDA) is optional.

## Product Application – Intuity Benching


### Double Sided Benching Application / Starter Kit

Every application begins with a Starter Kit.

#### Double Sided Starter Kit

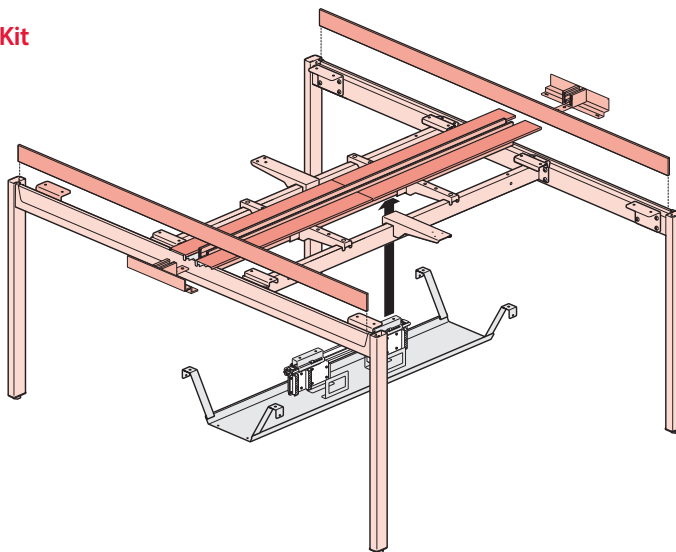

#### Double Sided Starter Kit – In-Line Benching Application

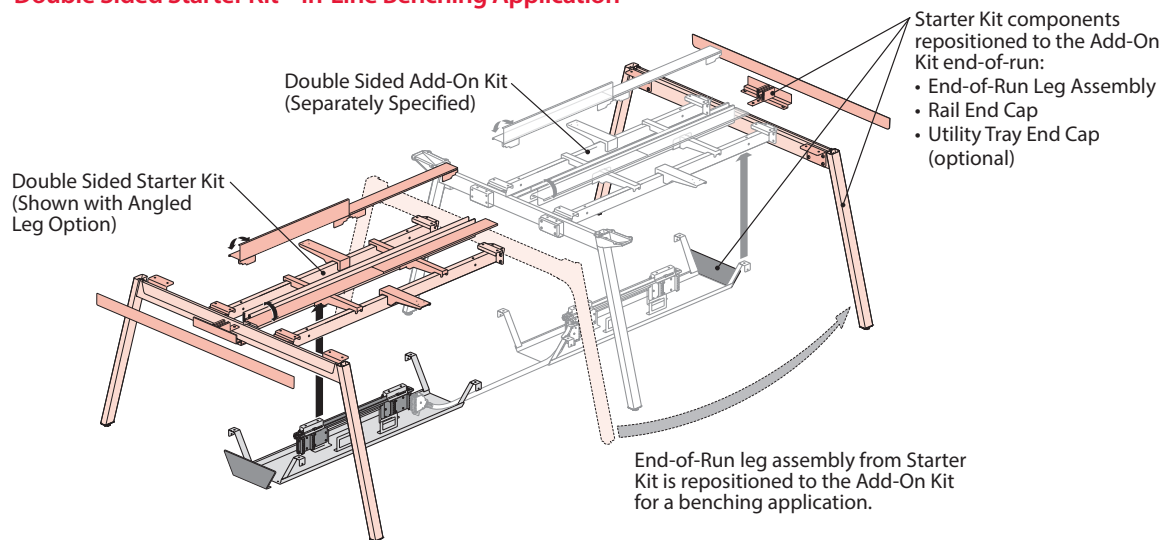


- Note**
- Intuity Worksurfaces must be separately specified.
  - Worksurface access hatches are optional for Rectangular Worksurfaces; specified and shipped with Starter Kit or Add-On Kit.
  - Double Sided Kits with power are standard with integrated below-worksurface Utility Trays.

## Product Application – Intuity Benching


### Double Sided Application / Add-on Kit

The Add-On Kit is always used with a Starter Kit.

#### Double Sided Add-On Kit - Options

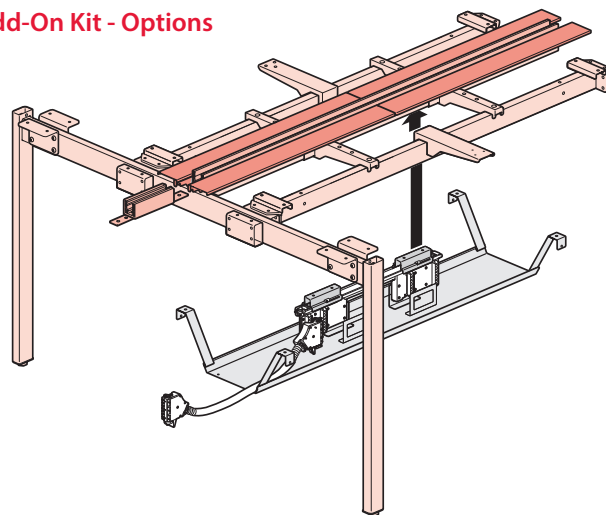

#### Double Sided Add-On Kit – In-Line Benching Application

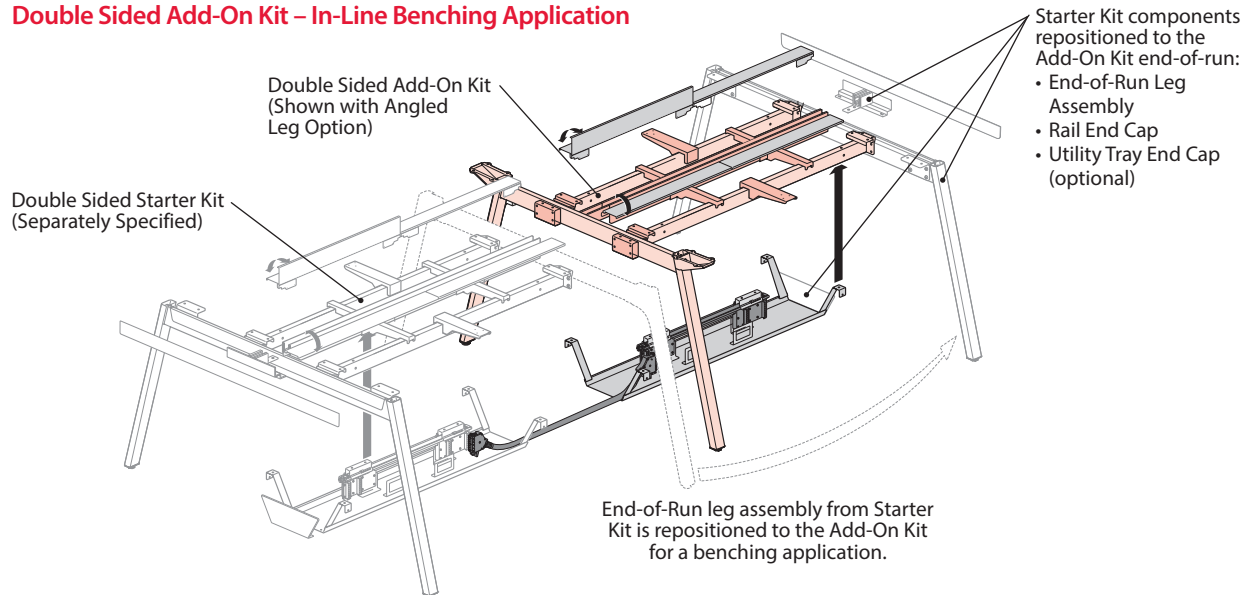

- Note**
- Intuity Worksurfaces must be separately specified.
  - Worksurface access hatches are optional for Rectangular Worksurfaces; specified and shipped with Starter Kit or Add-On Kit.
  - Double Sided Kits with power are standard with integrated below-worksurface Utility Trays.

## Product Application – Intuity Benching


### Planning an In-Line Single Sided Benching Application – Starter Kit, Add-On Kit(s) and Worksurfaces

- Every application begins with a Starter Kit.
- An Add-On Kit is used adjacent to a Starter Kit in a benching application.
- For a longer benching application additional Add-On Kits may be located adjacent to each other.
- Intuity worksurfaces must be separately specified.
- Powered applications require separately specified components for in and out power path.
- Specify Intuity Worksurfaces for use with or without an Access Hatch.

#### Note

- Access Hatch is specified with a Starter Kit or Add-On kit.
- Worksurfaces are separately specified.
- Angled legs are required when using a knife edge worksurface.

#### Plan View:

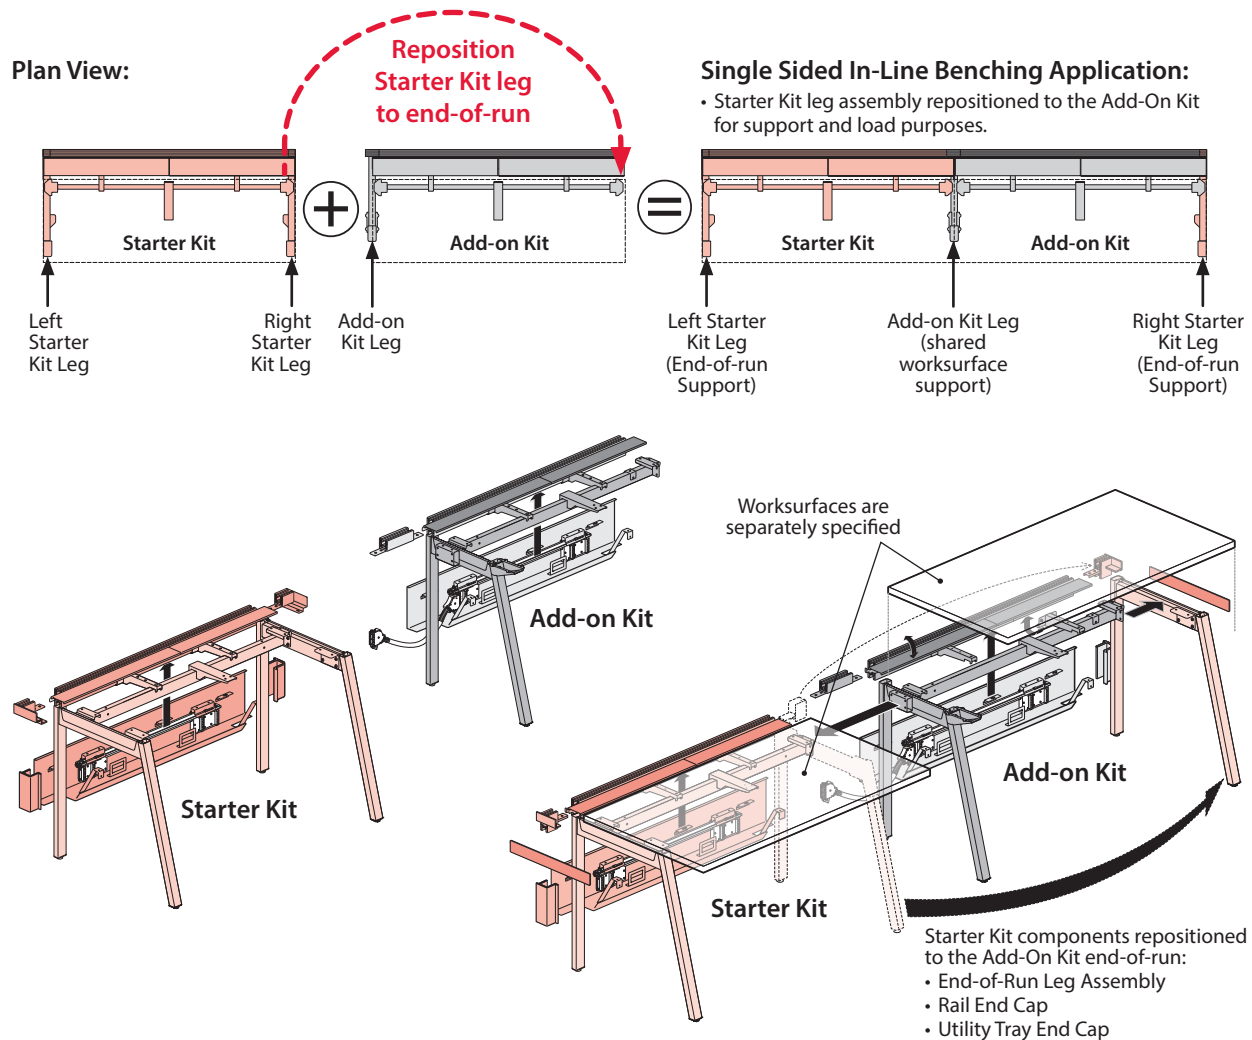

- Both legs of a Single Sided Starter Kit are the same depth to allow for a single freestanding desk application. In a benching application one leg is repositioned to the end-of-run. Starter Kit legs do not provide shared worksurface support.
- The Single Sided Add-On Kit leg is shallower than the Starter Kit legs to allow for increased kneespace and is positioned to an inboard benching location. The Add-On Kit leg provides shared worksurface support, only.
- Intuity Worksurfaces are separately specified. Worksurfaces are available to match the width of the Starter Kit or Add-On Kit; not intended for spanning worksurface applications.




## Product Application – Intuity Benching

### Planning an In-Line Double Sided Benching Application Starter Kit, Add-On Kit(s) and Worksurfaces

- Every application begins with a Starter Kit.
- An Add-On Kit is used adjacent to a Starter Kit in a benching application.
- For a longer benching application additional Add-On Kits may be located adjacent to each other.
- Intuity worksurfaces must be separately specified.
- Specify Intuity Worksurfaces for use with or without an Access Hatch.
- Powered applications require separately specified components for in and out power path.
- Intuity worksurfaces are available for use with or without Access Hatch.

- Note**
- Access Hatch is specified with a Starter Kit or Add-On kit.
  - Worksurfaces are separately specified.
  - Angled legs are required when using a knife edge worksurface.

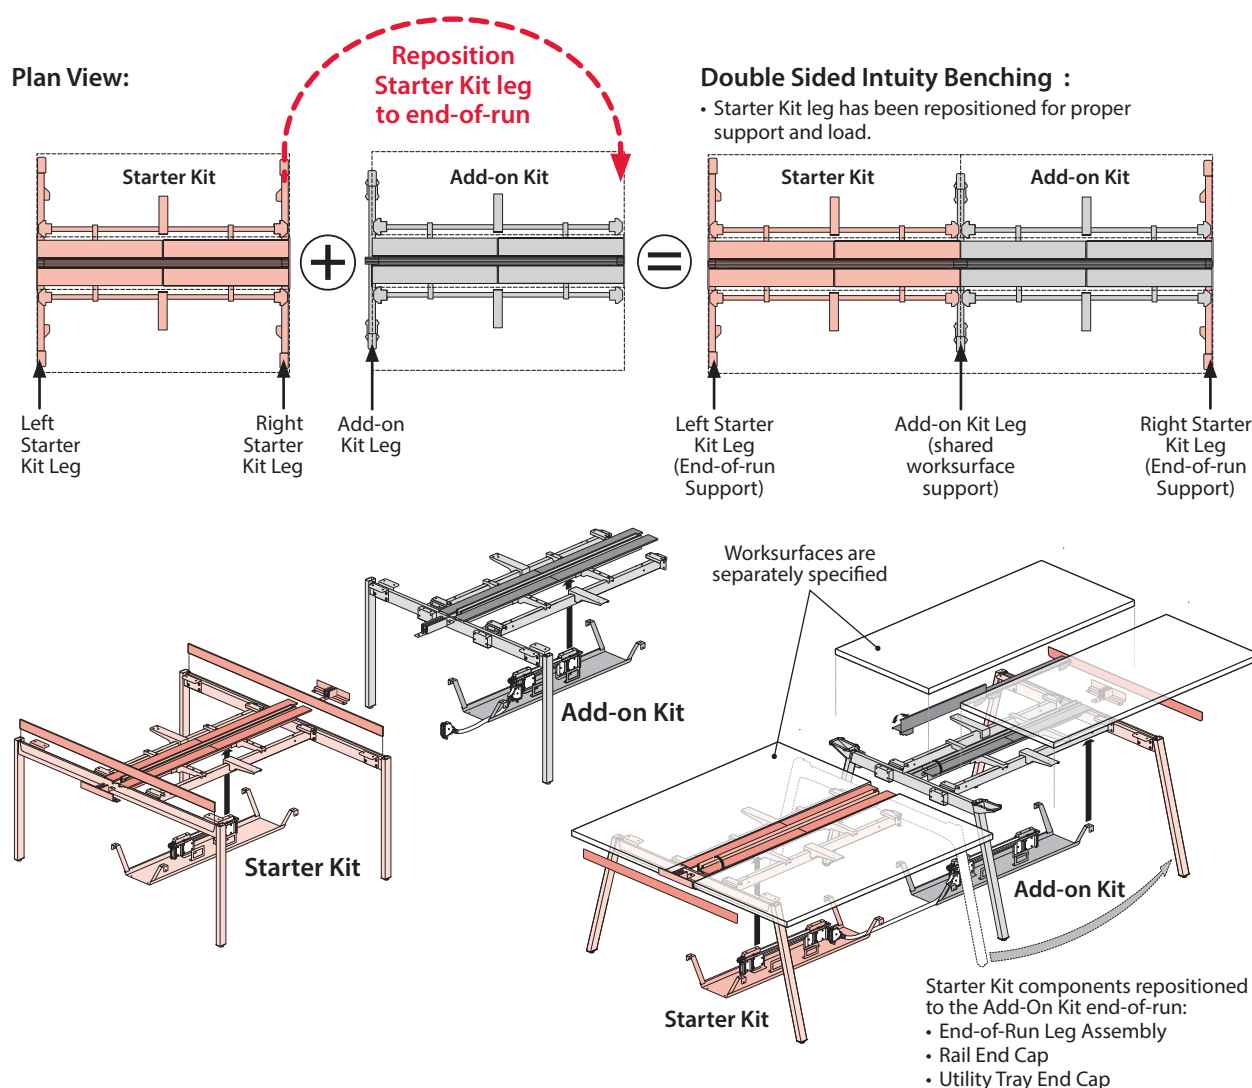

- Both legs of a Double Sided Starter Kit are the same depth to allow for a single freestanding back-to-back desk application. In benching application one leg is repositioned to the end-of-run. Starter Kit legs do not provide shared worksurface support.
- The Double Sided Add-On Kit leg is shallower than the Starter Kit legs to allow for increased kneespace and is positioned to an inboard benching location. Add-On Kit leg provides shared worksurface support, only.
- Intuity Worksurfaces are separately specified. Worksurfaces are available to match the width of the Starter Kit or Add-On Kit; not intended for spanning worksurface applications.

## Product Application – Intuity Benching

### Column Leg Support / Double Sided Add-On Kit


- A Column Leg is for use in a double sided benching applications, only.
- The Add-On Kit's column leg supports one end of a back-to-back shared worksurface condition providing greater kneespace clearance than a straight or angled leg.
- A Column Leg has an enclosed cavity and removable cover for routing power up from the floor.

#### Column Leg Planning Guidelines (Plan View)


- No more than (2) column legs may be used consecutively
- A straight or angled leg must be used adjacent to each consecutive column leg for proper support and load.
- A Column Leg is not for use at an end-of-run condition.

#### Double Sided Add-on Kit Leg Option:


##### F Column Leg



**✓ Do** (1) Column Leg with Adjacent Straight or Angled Legs

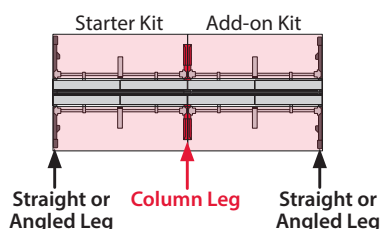


**✗ Don't** (1) Column Leg in End-of-run condition

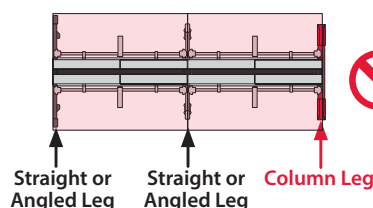


A Column Leg is not for use at an end-of-run condition

**✓ Do** (2) consecutive Column Legs with Adjacent Straight or Angled Legs

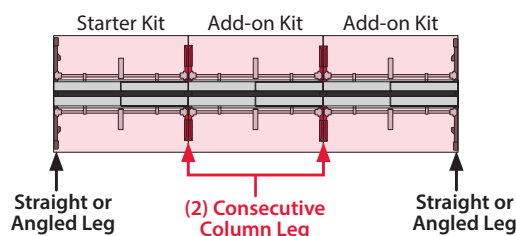


**✗ Don't** (3 or more) consecutive Column Legs with Adjacent Straight or Angled Legs

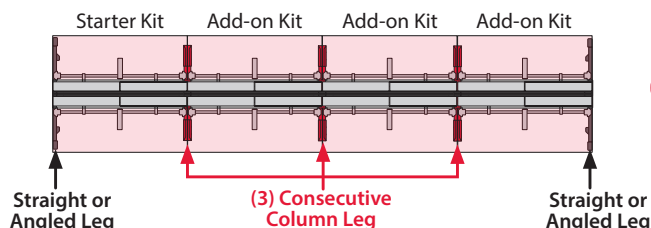

No more than (2) column legs may be used consecutively

**✓ Do** (2) consecutive Column Legs with Adjacent Straight or Angled Legs

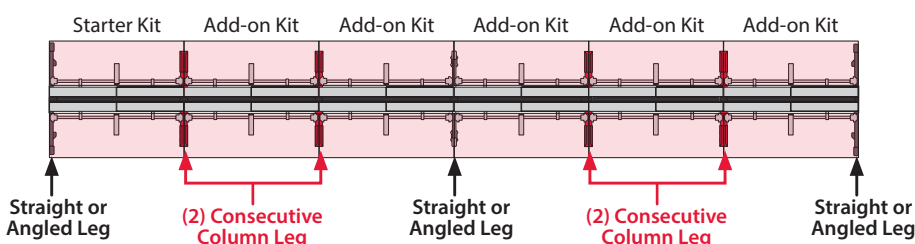

**Note** The above planning guidelines apply to In-Line Benching Applications.

## Product Application – Intuity Benching


### Planning with Intuity Rectangular Worksurfaces

#### Worksurfaces With or Without Access Hatches

Determine if the application should be with or without Access Hatches. Access Hatch option is specified with the Starter kits and Add-On kits. Hatches are factory installed on kits.


#### Rectangular Worksurface

- Does not accommodate Access Hatches.



#### Rectangular Worksurface – For Use with Access Hatches

- Does accommodate Access Hatches.

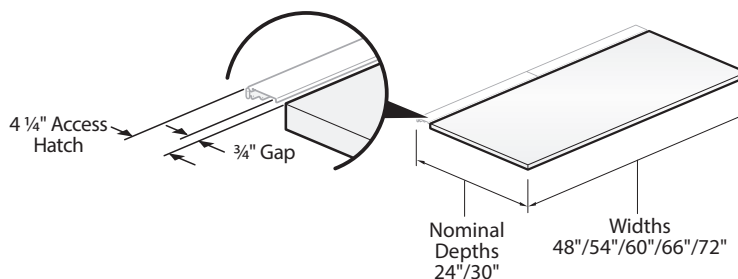

#### Worksurfaces without Hatch:

When power access is required, a Power Tap is recommended. Power Taps allow above worksurface power access with the appropriate mounting bracket. Refer to the Power Section for additional planning information.

#### Worksurfaces with Access Hatch:

Hinged Hatches open upward providing a cord drop to the floor. When used with a Utility Tray which is located beneath the worksurface power cords and cables may be routed horizontally. If the Utility Tray is specified with -3 or -4 circuit power a Power Distribution assembly (PDA) is included. Refer to the Power Section for additional planning information.

#### Product Specification:

- If hatches are not specified on a Starter or Add-On Kit (option C), specify Rectangular Worksurface.
- If hatches are specified on a Starter or Add-On Kit (option S), specify Rectangular Worksurfaces – For use with Access Hatches.

### Worksurface Edge Options



Determine the application edge option. Laminate and wood worksurfaces are available with Edgeband or Knife edge options. The type of edge option selected may dictate the leg option due to the dimensional relationship with the user side of the worksurface.

#### 3 mm Edgeband :

3 mm Edgeband worksurfaces may be used with all available leg options. Worksurfaces with 3 mm edgeband are available with standard core.

#### Knife Edge:

Knife edge worksurfaces must be used with Angled legs due to the dimensional relationship with the user side of the worksurface.

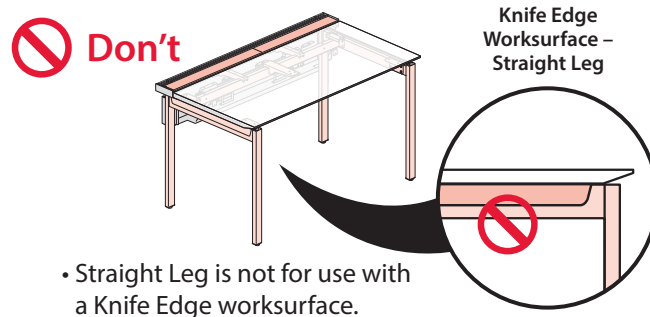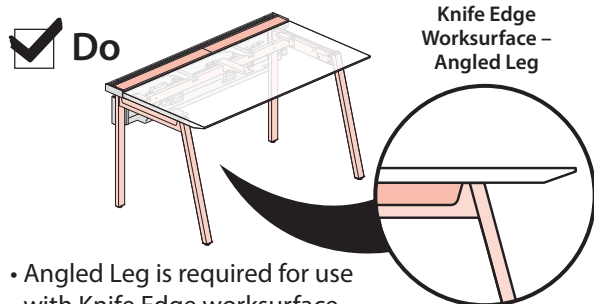

## Product Application – Intuity Benching


### Planning Models – 120° Single Desk and 120° Benching Applications



**Do**

120° Single Sided Starter Kit or 120° Double Sided Three-Pack Starter Kit may be used as a single standalone desk.

#### 120° Starter Kits – Single Desk Application (Top View)

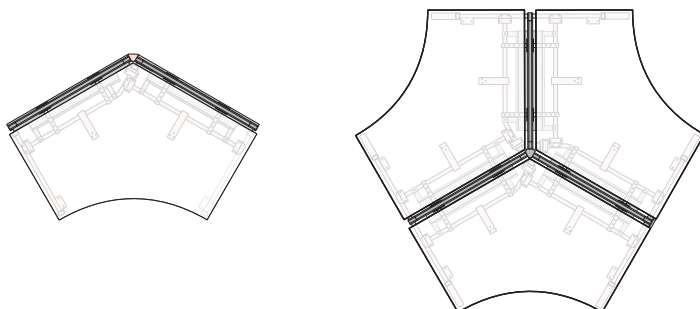

**Do**

120° Starter Kits and 120° Add-On Kits used together or with In-Line Kits.

#### Benching Application (Top View)


##### Single Sided Application



**Tip**

A 120° Single Sided Add-on Kit is not available.

##### Double Sided Applications

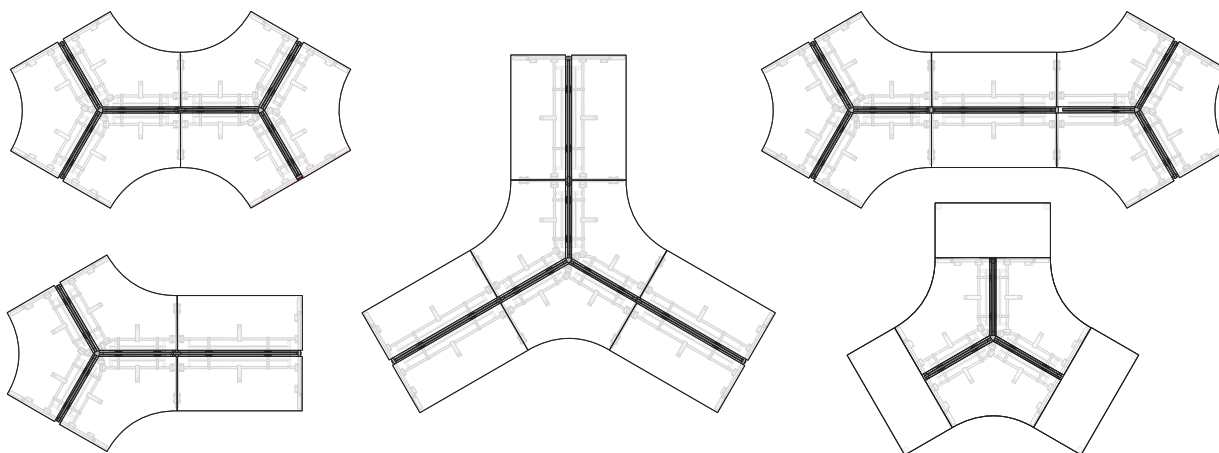

#### Note


- For storage needs, units must be freestanding/mobile; if used in a nested application verify the storage height is applicable and will clear any below worksurface obstructions.
- Intuity Kits do not provide the required support and load support needs for integrated Palette product applications except the following:
  - Belong Rail Mounted Screens and Work Tool Accessories
  - Select Active Component products. Refer to the Active Components Price List and Specification Guide for Product application guidelines.

## Product Application – Intuity Benching


### Planning Models – Single-Sided 120° Benching



Do not attach (2) 120° Starter Kits together with the front and back sides opposite each other.

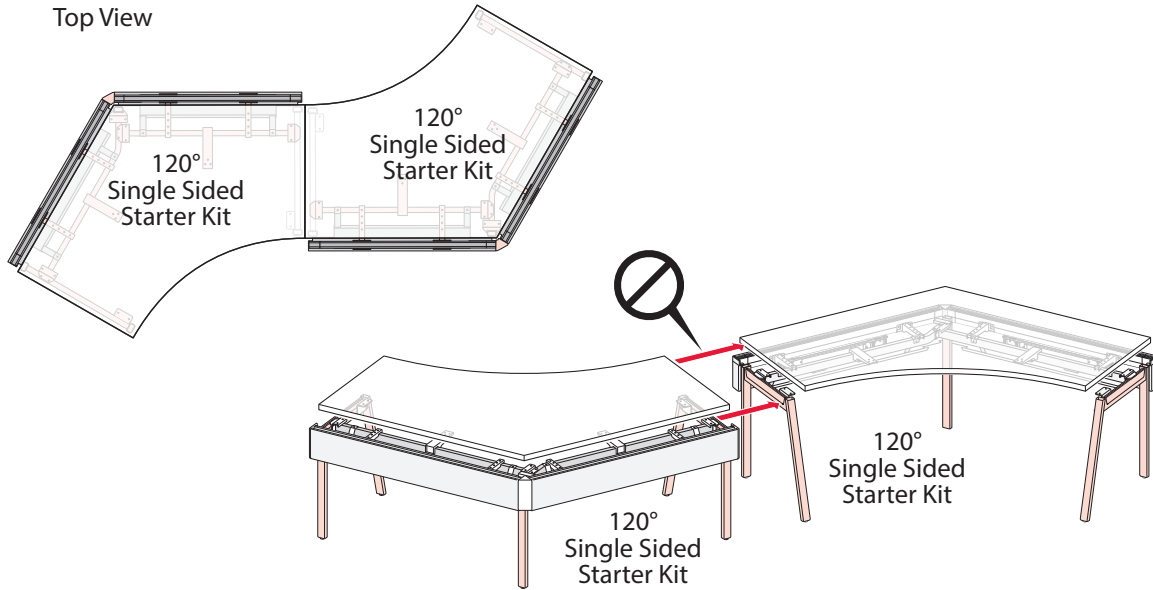

A Return Worksurface is not for use with a 120° Single Sided Starter Kit.

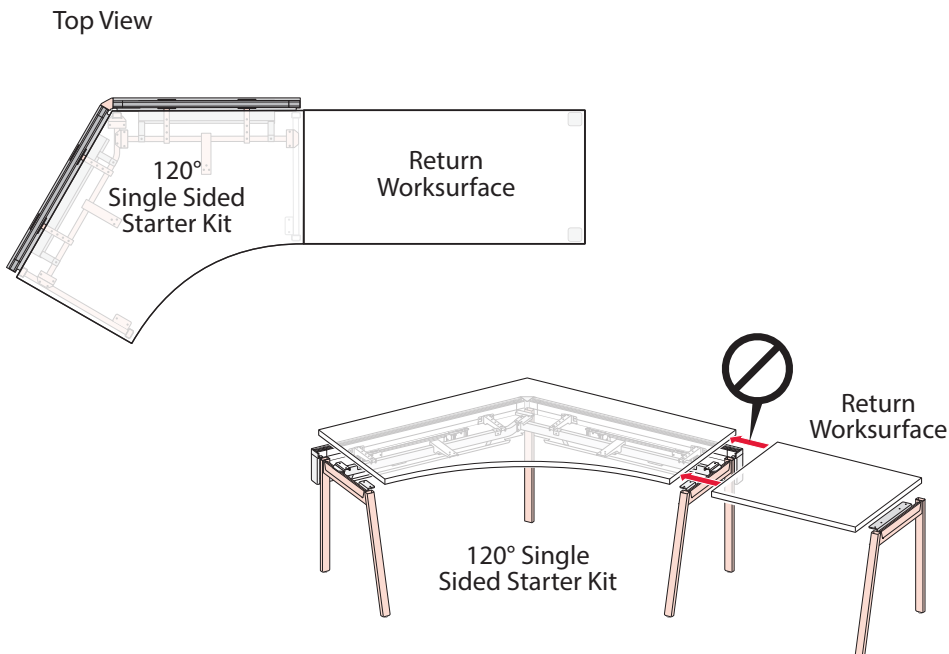


## Product Application – Intuity Benching


### Single Sided Application / 120° Starter Kit

Every application begins with a Starter Kit.

#### 120° Single Sided Starter Kit

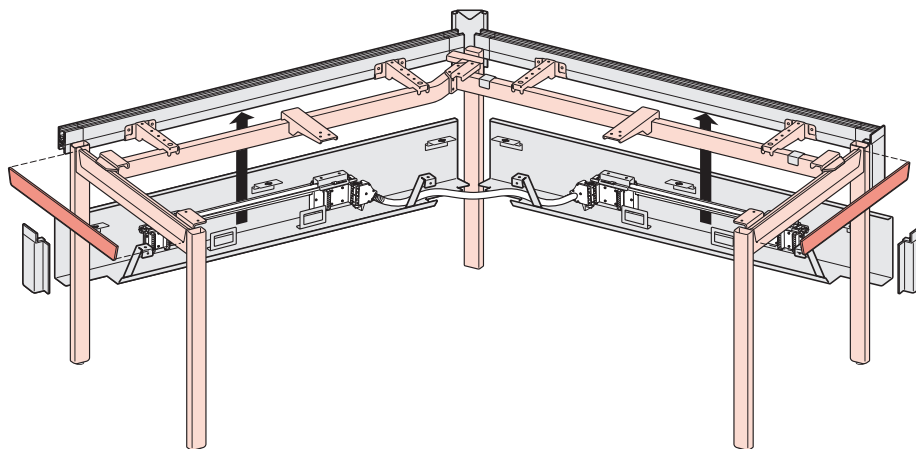

#### Single Sided Starter Kit – 120° Benching Application

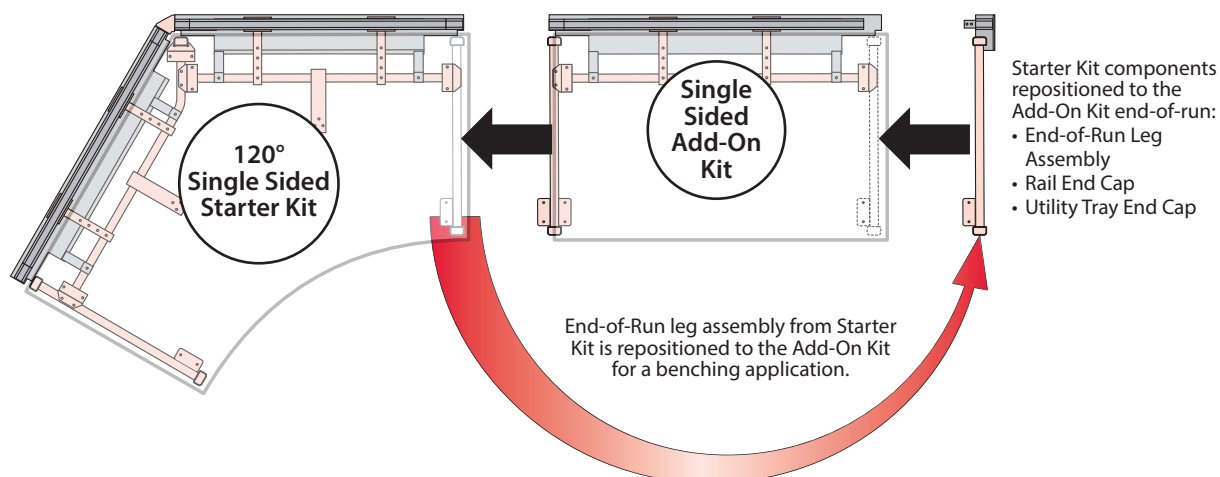


- Note**
- Intuity Worksurfaces must be separately specified.
  - Access Hatches are not available with 120° Starter or Add-on Kits.
  - Single Sided Kits are standard with an integrated below-worksurface Utility Tray.

## Product Application – Intuity Benching


### Double Sided Application / 120° Starter Kit

Every application begins with a Starter Kit.

#### 120° Double Sided Three Pack Starter Kit

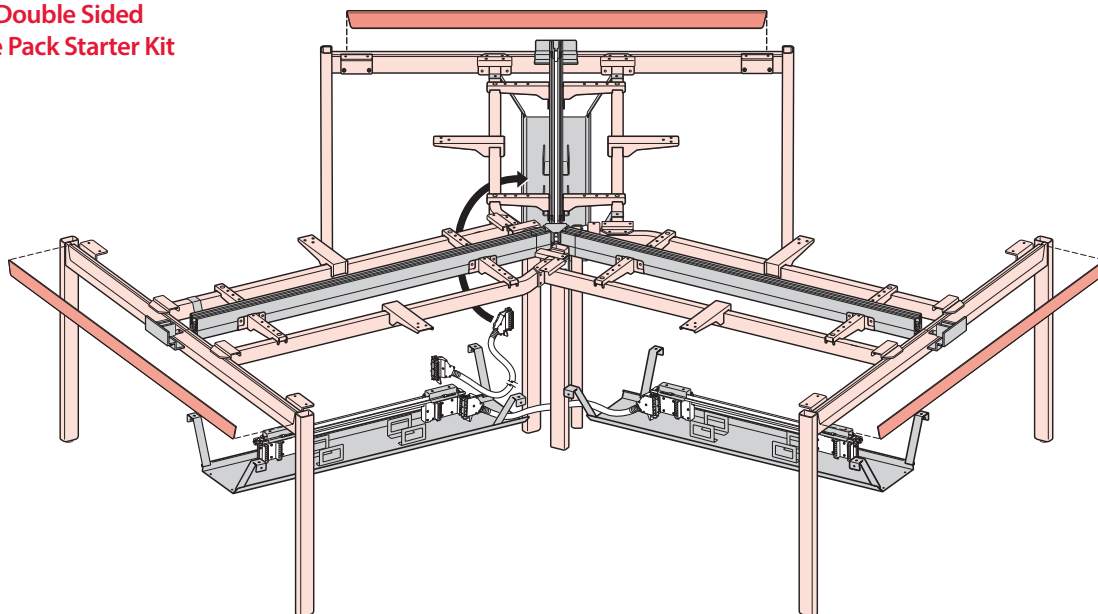

#### Double Sided Starter Kit – 120° Benching Application (Top View)

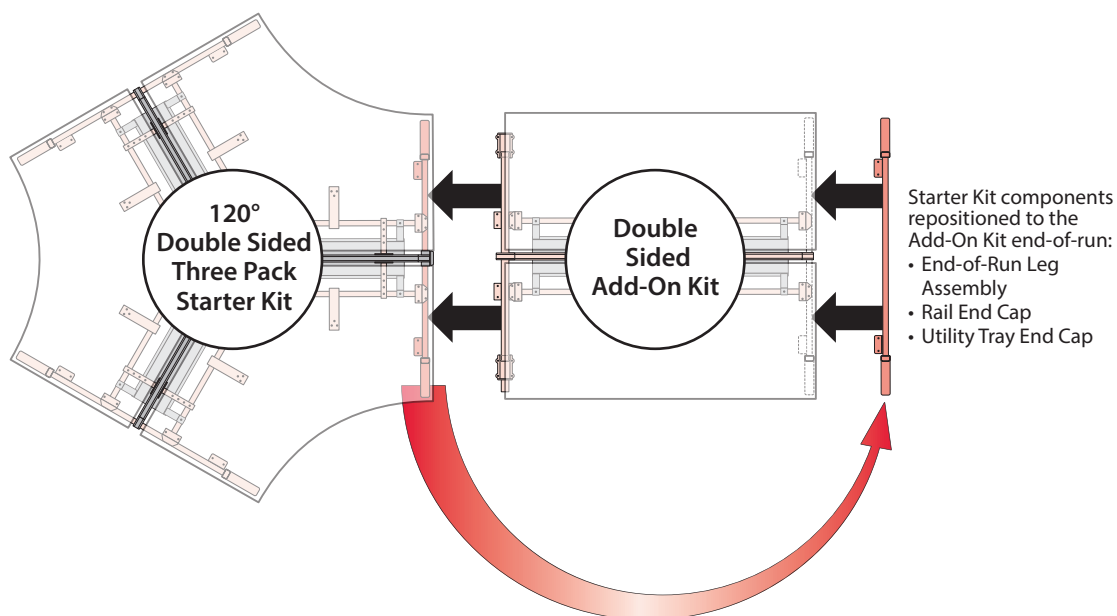

#### Note

- Intuity Worksurfaces must be separately specified.
- Access Hatches are not available with 120° kits.
- Double Sided Kits with power are standard with integrated below-worksurface Utility Trays.



## Product Application – Intuity Benching

### Double Sided 120° Application / Add-on Kit


Add-On Kit(s) is always used with a Starter Kit. 120° Add-On Kits are available single or double sided.

#### 120° Double Sided – Three Pack Add-on Kit


For an 120° Double Sided Three-Pack Add-On Kit the leg assemblies are specified as a Leg Kit. The Leg Kit includes one shared leg assembly and one end-of-run leg assembly.

#### Leg Kit Options:

- W** Shared Straight Leg and Straight Leg
- Y** Shared Angled Leg and Angled Leg
- X** Column Leg and Straight Leg
- Z** Column Leg and Angled Leg

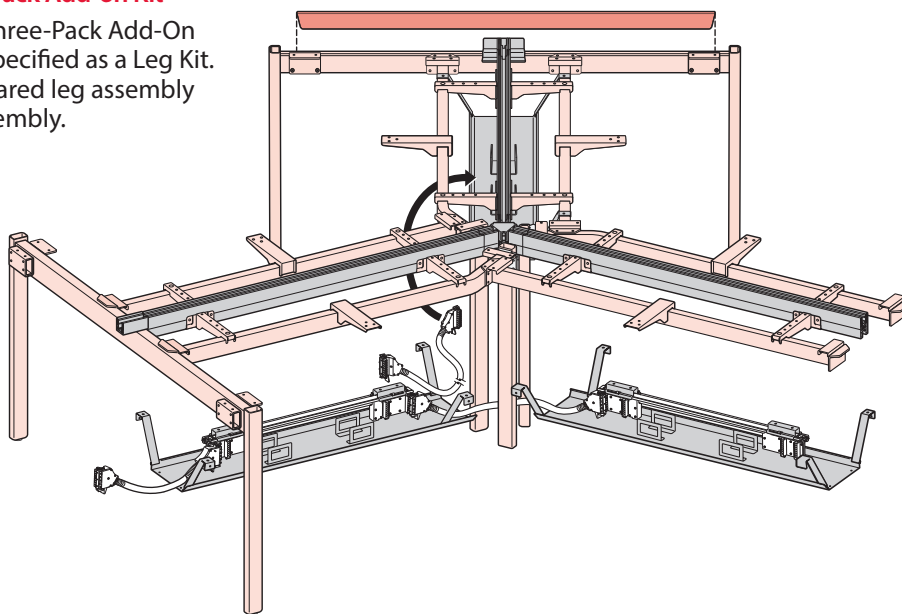

#### Double Sided 120° Add-on Kit – 120° Benching Application (Top View)

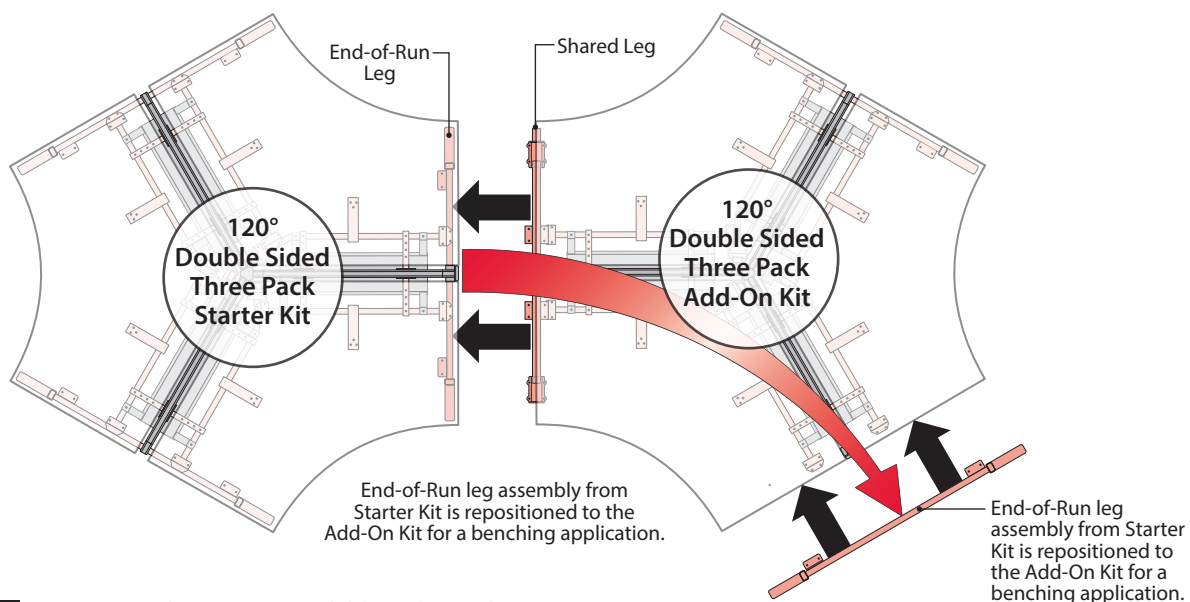

#### Note

- Access Hatches are not available with 120° kits.
- Angled legs required for knife edge worksurface option.
- Double Sided Kits with power are standard with integrated below-worksurface Utility Trays.




## Product Application – Intuity Benching

### Planning with Intuity Corner 120° Wrap-Around Worksurfaces

#### 120° Worksurfaces With or Without a Wireway

120° Worksurfaces may be specified with a notched or curved wireway to provide additional wire management capacity for applications that require it.

#### Wireway Options

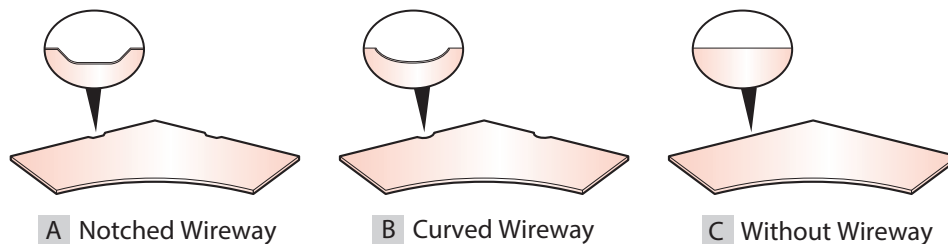

#### Power Access for Worksurfaces without a Wireway:

When power access is required for a worksurface without a wireway, a Power Tap is recommended. To provide power access above the worksurface, the Power Tap requires the separate specification of an appropriate mounting bracket. Refer to the Power Section for additional planning information.

#### Worksurfaces with a Wireway:

The wireway opening provide additional space for routing cords and cables below the worksurface to the Utility Tray. The Utility Tray allows cords and cables to be routed horizontally through the application. If the Utility Tray is specified with -3 or -4 circuit power a Power Distribution Assembly (PDA) is included. Refer to the Power Section for additional planning information.

#### Product Specification:

- Worksurfaces with or without a wireway may be used with all 120° Starter and Add-on Kits.

#### Worksurface Edge Options

Determine the application edge option. Laminate and wood worksurfaces are available with Edgeband or Knife edge options. The type of edge option selected may dictate the leg option due to the dimensional relationship with the user side of the worksurface.

#### 3 mm Edgeband :

3 mm Edgeband worksurfaces may be used with all available leg options. Worksurfaces with 3 mm edgeband are available with standard core.


#### Knife Edge:

Knife edge worksurfaces must be used with Angled legs due to the dimensional relationship with the user side of the worksurface.




**Do**

- Angled Leg is required for use with Knife Edge worksurface.

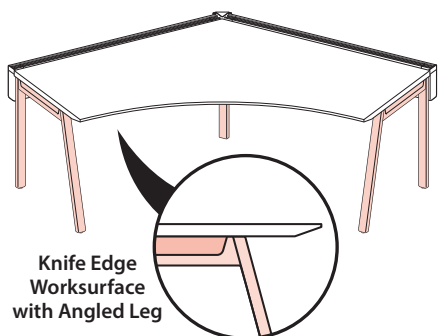

**Don't**

- Straight Leg is not for use with a Knife Edge worksurface.

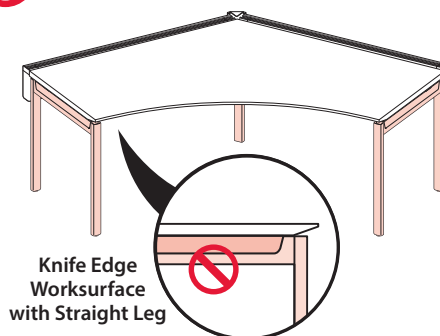


## Product Application – Intuity Benching

### Planning with Storage and Accessories – Below The Worksurface


#### Nested Mobile Pedestal Applications

- When planning a nested storage applications verify the storage unit will clear all below worksurface obstructions such as the Utility Tray.
- Intuity Benching Applications that include a Utility Tray provide  $21\frac{7}{16}$ " clearance from the floor to the bottom of the Utility Tray. Mobile pedestals with heights greater that  $21\frac{7}{16}$ " may interfere with the Utility Tray and may (depending on the depth) not fully nest under the worksurface.

#### Side View – Double Sided Benching Application with X Series Mobile Pedestal

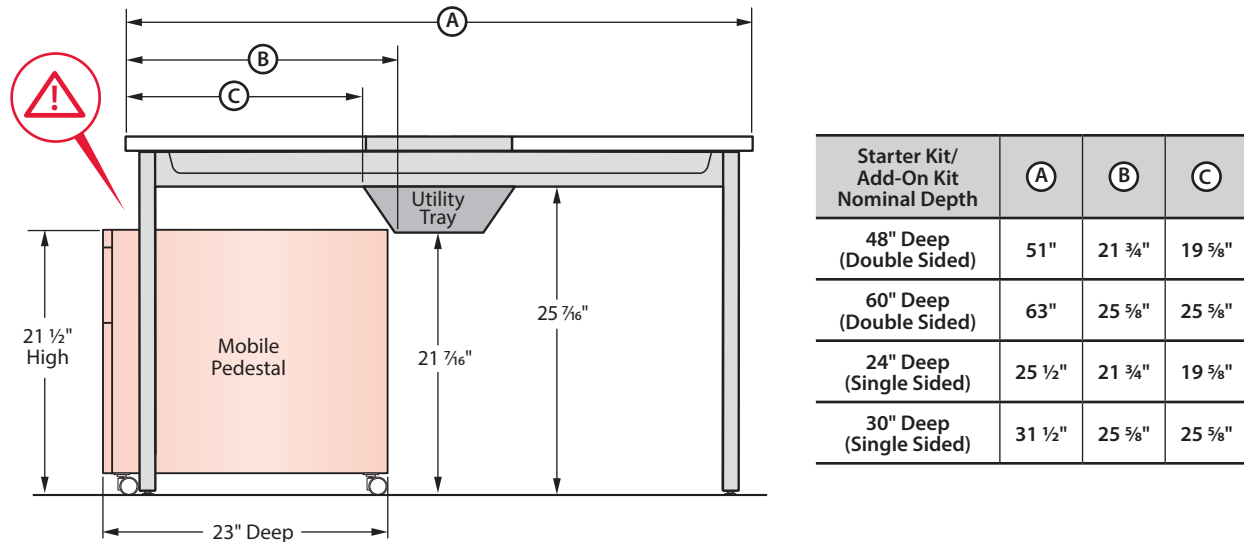

**!** In the example above, the Mobile Pedestal would not fully nest under a 48" deep (double sided) or 24" deep (single sided) benching application. If you prefer an aesthetic where the Mobile Pedestal can sit flush with the worksurface or the legs, specify a different size Mobile Pedestal that won't interfere with the Utility Tray. (see examples below).

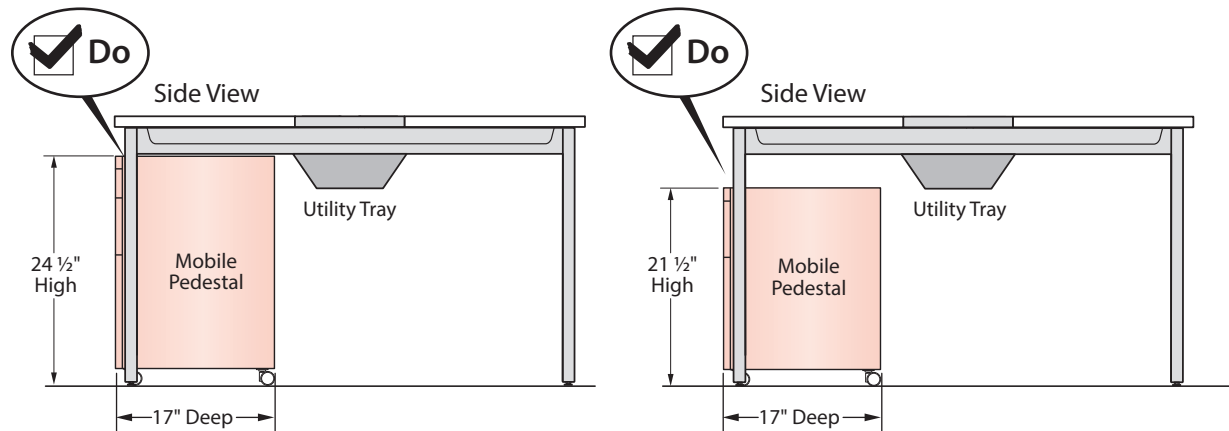

#### Other Below Worksurface Storage and Accessories

- Intuity benching applications may be used with the following separately specified components:
  - X Series pencil, shallow or center drawer
  - Adjustable Keyboard Pad
- Ensure the mounting location of the components do not interfere with any understructure bracketry such as the Mid Span Bracket. (See Critical Dimensions page for more information)

**Note** • Intuity Benching is not for use with Suspended Pedestals.  
• Glides are available through eParts that provide  $1\frac{1}{2}$ " of adjustment.

## Product Application – Intuity Benching


### Planning with Storage and Accessories – Above the Worksurface

- Intuity Benching applications may be used with the following separately specified components:
  - Belong Work Tools and Accessories
  - Monitor Arms
  - Intuity Rail Mounted Screens.




**Do**

Intuity Benching is for use with Screens, Accessories and Lighting.

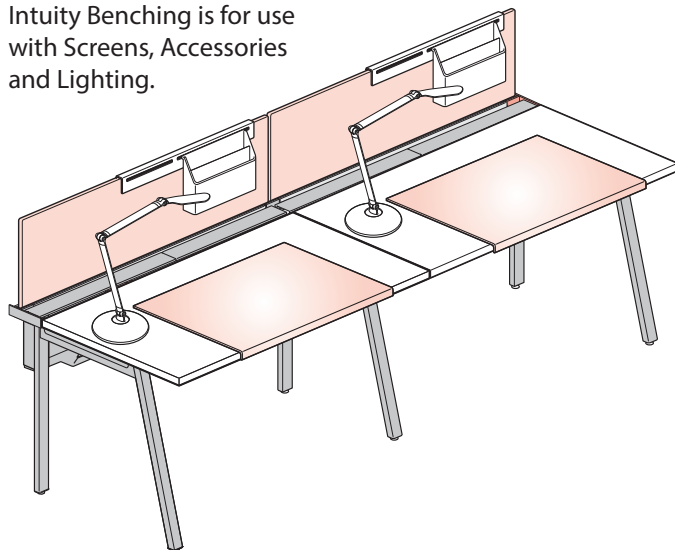


**Don't**

Intuity Benching is not designed for use with Upper Storage Units.

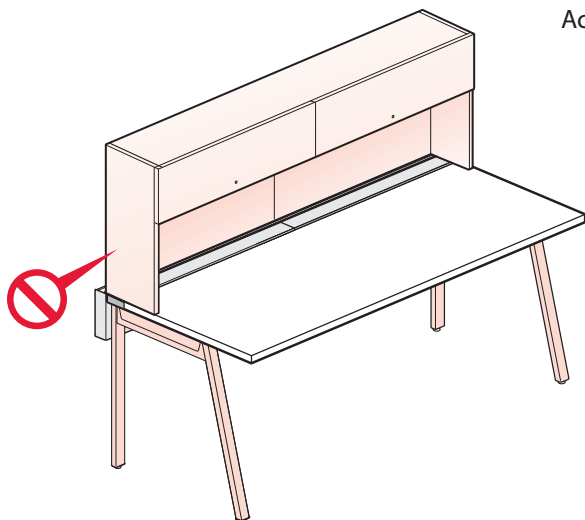

**Don't**


Ensure Accessories don't interfere with the opening of the Full Width Access Hatches.

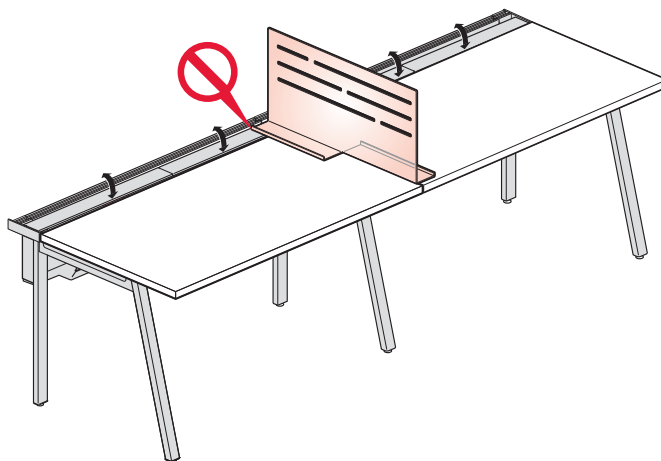

## Product Application – Intuity Benching


### Planning with Storage and Accessories – Above the Worksurface

- ✓ **Do** Intuity Benching applications without Access Hatches may be used with most Monitor Arms.


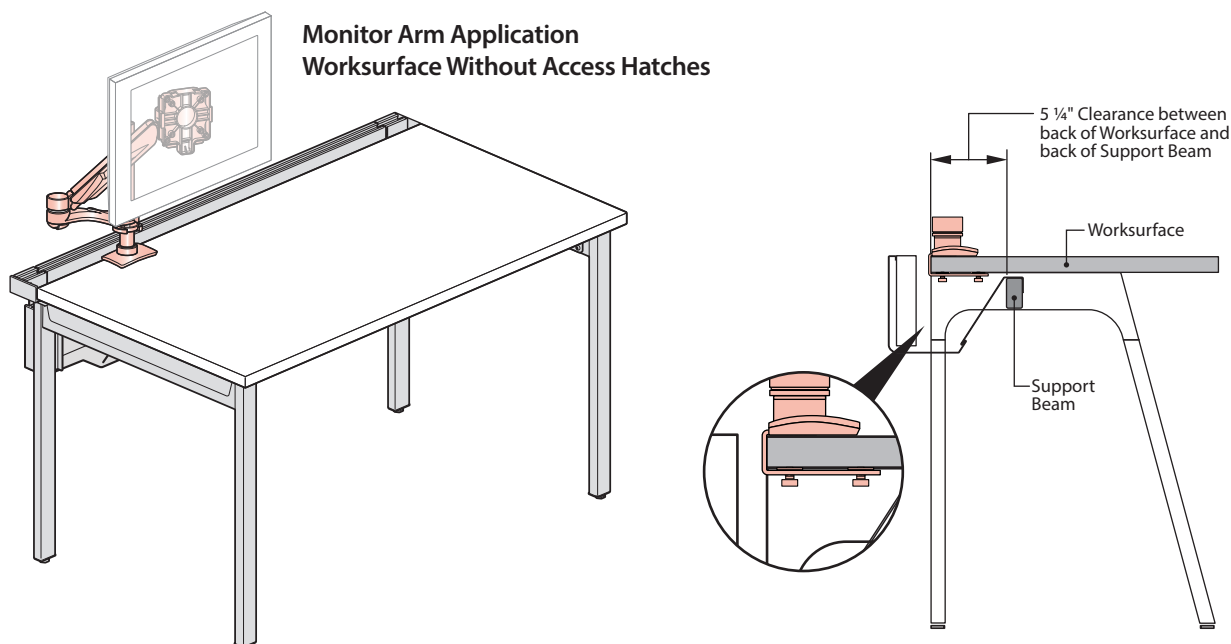


- ✓ **Do** Intuity Benching applications with Access Hatches may only be used with the following Monitor Arms that include an Intuity Desk Clamp:

#### Monitor Arm – Adjustable Post Arm

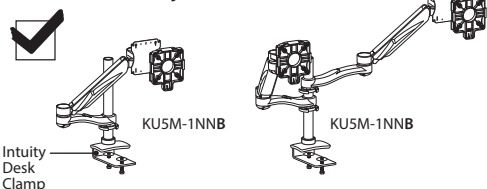


#### Monitor Arm – Extend Arm

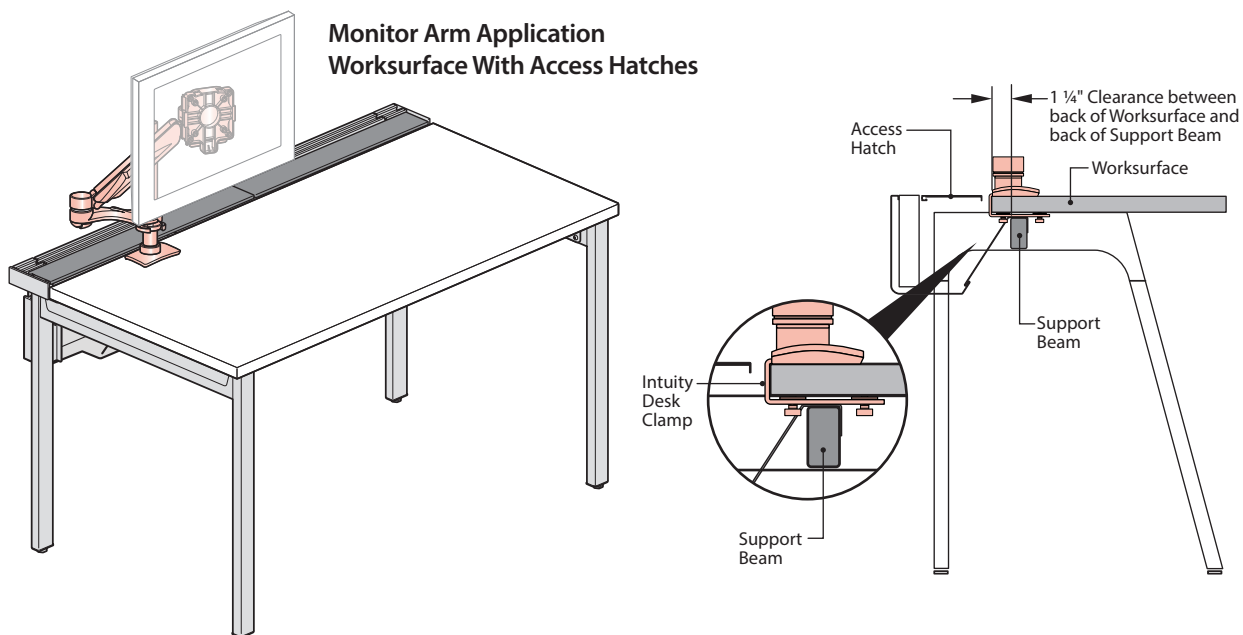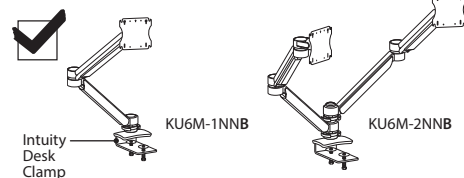

## Product Application – Intuity Benching


### Planning with Return Kits

- A Return Leg Kit and Return Worksurface (each separately specified) may be used to create a return that can be attached to the front edge of a rectangular worksurface on an Intuity Benching Run.
- Specify Return Leg Kit depths to match depth of Return Worksurface (24" or 30" Nominal Depth).
- Straight Leg Kits are non-handed and Angled Leg Kits are available Left or Right handed.

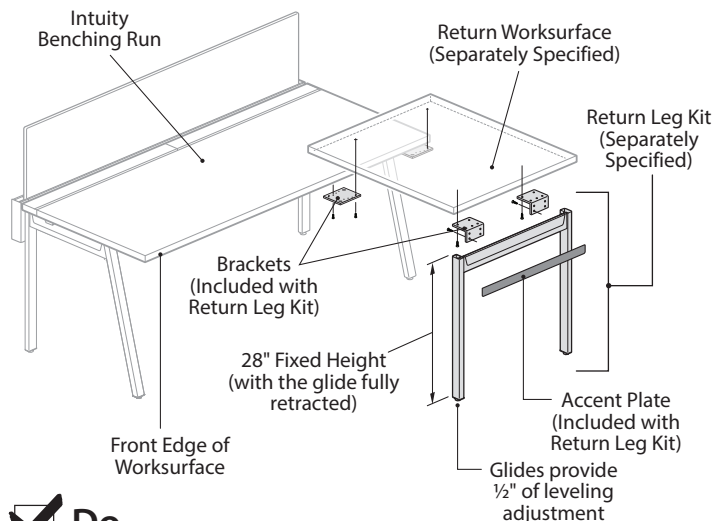


**Do**

Attach Return worksurfaces to rectangular worksurfaces specified with a 3 mm Edgeband.

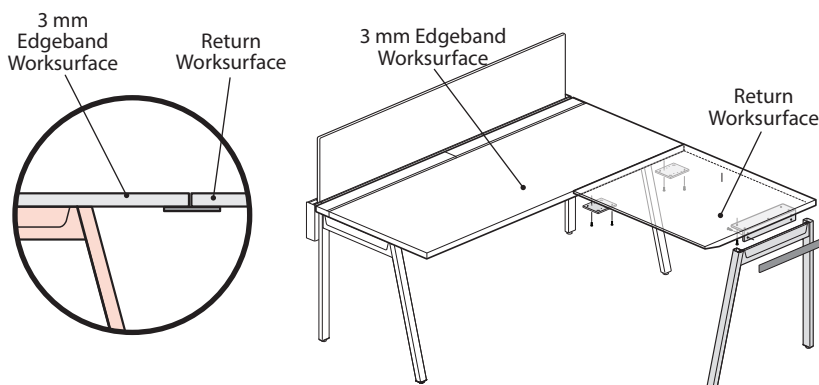

**Don't**

To avoid a gap in edge profiles, do not attach Return worksurfaces to rectangular worksurfaces specified with a Knife Edge. This gap prevents the proper installation of brackets to support the return worksurface.

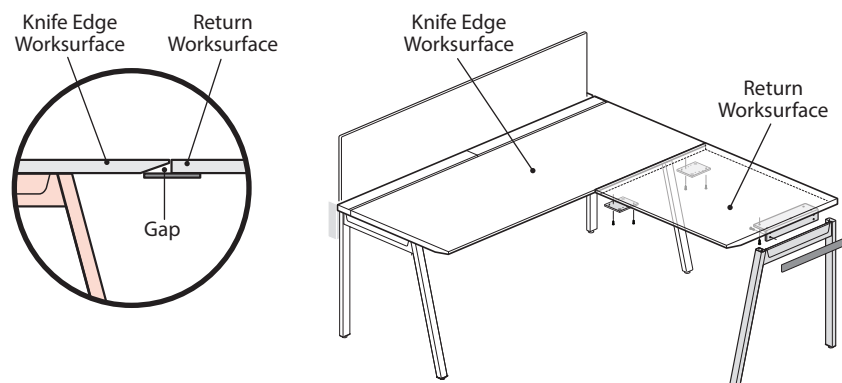

**A Return Worksurface and Leg Kit may not be attached to a 120° Corner – Wrap Around Worksurface.**


## Product Application – Intuity Benching

### Planning with Return Kits and In-Line Benching



**Do**

Return Worksurfaces may be attached along the front edge of Rectangular Worksurfaces in Benching Applications.

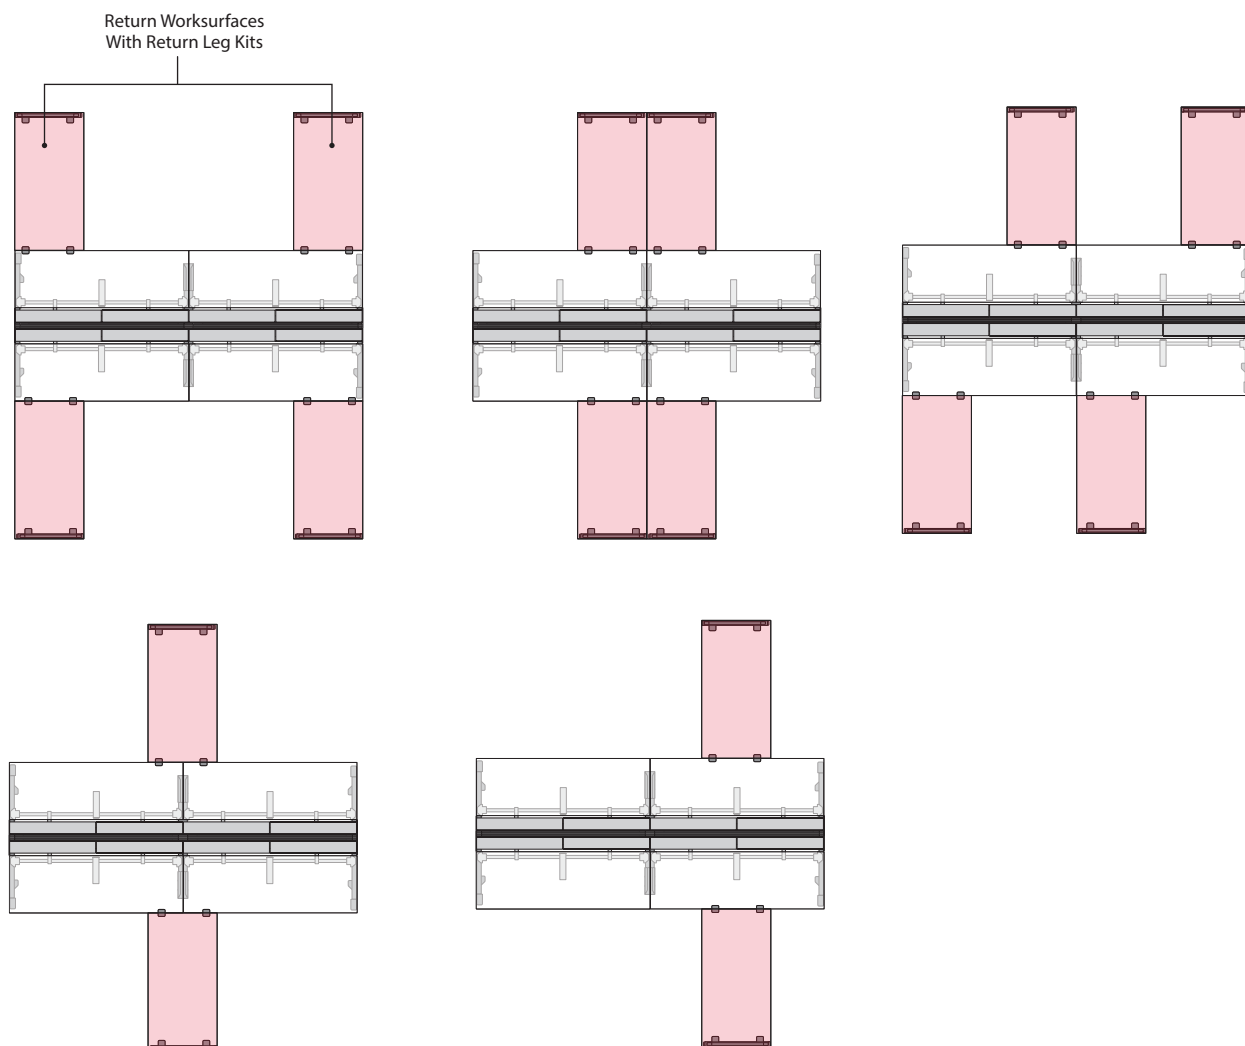


**Note** To avoid a gap in edge profiles, do not attach Return worksurfaces to rectangular worksurfaces specified with a Knife Edge.



**Don't**


Return Worksurfaces may not be attached to the ends of a benching application.

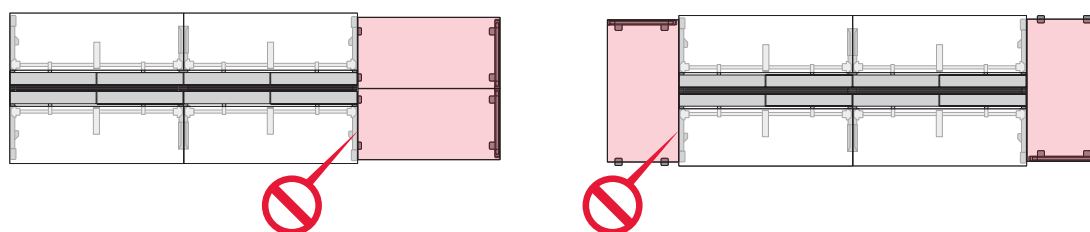

## Product Application – Intuity Benching



### Planning with Bench Ends

- The Bench End Worksurface may be combined with the Bench End Leg Kit to provide additional Worksurface area at the end of a Double Sided Intuity Benching run.
- Knife Edge option for use with Knife Edge Primary Worksurfaces, includes Knife Edge on all three user edges.

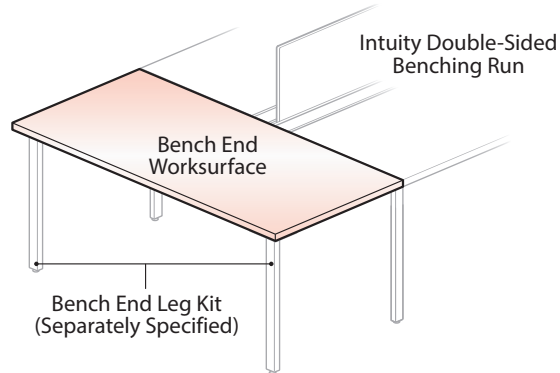


**Do**

- Attach the Bench End Worksurface and Leg kits to the ends of Intuity Benching Applications.
- Match the depth of the Bench End Worksurface to the depth of the benching application.
- A Bench End may be attached to an In-Line or a 120° Double Sided benching application.

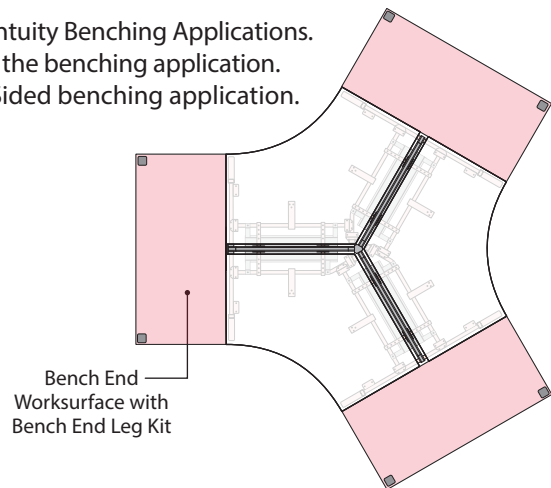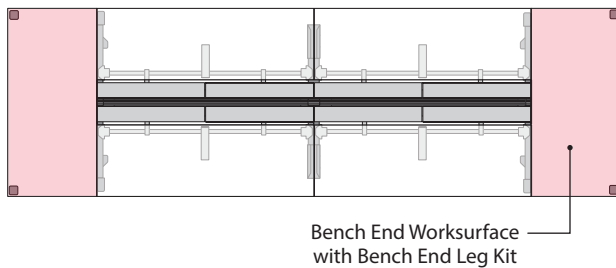


**Don't**

- Do not attach the Bench End Worksurface and Leg Kit to the side of a benching application.

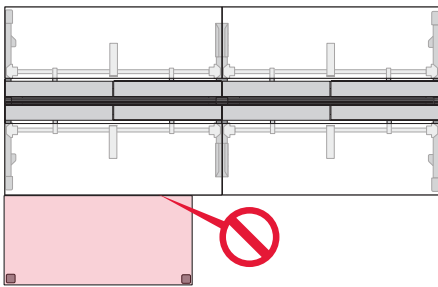

**Don't**

- Do not specify the depth of the Bench End Worksurface greater or lesser than the depth of the benching application.

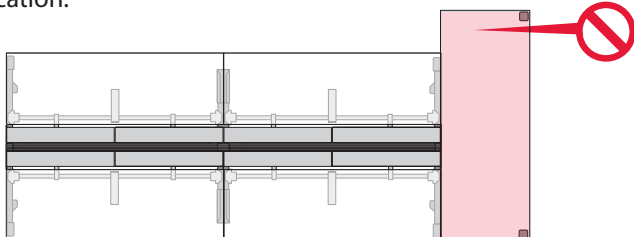

## Technical Specifications – Intuity Benching



## Technical Specifications – Intuity Benching

### Benching and 120° Tops

Benching and 120° worksurfaces/tops are 1 3/16" (30.2 mm) thick and are made with a wood composite core available in two types:

- **Standard Core:** Made with an engineered composite panel with a minimum 90% wood fiber content with at least 10% post consumer and 80% pre-consumer wood fiber bonded with resin. These work surfaces/tops are 3rd party certified compliant with GREENGAURD® and ANSI/BIFMA Standards for Low Emitting Products. The composite panel is 3rd party certified compliant with California Air Resource Board requirements for Phase 2 formaldehyde emission levels.

Laminate worksurfaces/tops are balanced construction with high-pressure laminate on the top, and a laminate backer on the bottom is available with two edge options:

- 0.118" (3 mm) radius edge ABS band on the user edge with a 0.029" (1 mm) thick ABS edge on the remaining edges.
- 0.118" (3 mm) radius ABS Edge band with a 2" deep reverse chamfer on the user edge and 0.039" (1 mm) thick edge band on the remaining edges. The exposed wood composite material on the bottom of the surface is sealed with a clear finish.

Wood Veneer worksurfaces/tops are balanced construction with wood veneer on the top. A balancing backer on the bottom is available with two edge options:

- 0.118" (3 mm) radius wood edge band on the user edge with a 0.039" (1 mm) thick edge band on the remaining edges.
- 0.118" (3 mm) radius wood edge band with a 2" deep reverse chamfer on the user edge and 0.039" (1 mm) thick edge band on the remaining edges. The exposed wood composite material on the bottom of the surface is sealed with a clear finish.

Benching and 120° worksurfaces are pre-drilled to accept installation of the table base/leg

### Benching

Configuration options include single, double, add-ons, bench end, and returns. Legs are available in two types consisting of Straight and Angled. All legs are steel tubing. Double Sided Add-on kits have an option for a shared column. Legs are 28" high to the bottom of the work surface with the glides fully recessed. Glides provide 1/2" of leveling adjustment. The legs attach to the frame assembly with threaded fasteners. The frame assembly has a built in rail allowing the use of several screen options. Shared legs allow for connecting tables end to end. Fastener holes in the frame assembly and legs are used to attach the 1 3/16" (30.2 mm) thick worksurface.

Widths start at 48" and go out to 72" (increments of 6"). Optional access hatches allow easy access to power and data connections. This option gives you 6" of space from the worksurface to the rail. The non hatch options give you 1" between the back edge of the worksurface and the rail for routing of power and data/communications cables.

### 120°

Configuration options include single starter kits, double starter kits and double sided add-ons. Legs are available in two types consisting of Straight and Angled. All legs are steel tubing. Double Sided Add-on kits have an option for a shared column. Legs are 28" high to the bottom of the work surface with the glides fully recessed. Glides provide 1/2" of leveling adjustment. The legs attach to the frame assembly with threaded fasteners. The frame assembly has a built in rail allowing the use of several screen options. Shared legs allow for connecting tables end to end. Fastener holes in the frame assembly and legs are used to attach the 1 3/16" (30.2 mm) thick worksurface. Widths start at 42" and go out to 54" (increments of 6"). Single sided has 1" and double sided has 3.64" between the back edge of the worksurface and the rail for routing of power and data/communications cables.

When specified a pre-wired power distribution system can be attached under the frame assembly and inside the utility tray frame assembly and legs are powder coated. Shared support columns with removable steel covers .031" (.8 mm) thick provide openings to route power and data/communication from the floor into the utility tray.

## Technical Specifications – Intuity Benching

### Electrical Distribution System

The electrical distribution system has eight-wires and can be specified with either one 3-circuit or two different types of 4-circuit wiring configurations. The system is UL listed and CUL certified (UL Mark for Canada). The overall system is PVC Free and consists of a variety of in-feeds to bring power to desks or storage. Power distribution assemblies (PDA's) and flexible power jumpers/connectors route power through the furniture.

The power system has 8 wires and is available in 3 or 4 circuit configurations. The 3-circuit version has three hot conductors, three neutral conductors, one common ground, and one isolated ground. The wire gauge of the 3-circuit system's conductors is 12 American Wire Gauge (AWG). The 4-circuit has two versions; one is a 2 +2 configuration and the other is a 3 + 1, both of which have four hot conductors, two neutral conductors, one common ground, and one isolated ground. The wire gauge of the 4-circuit system's conductors is 10 AWG for the neutral conductors and 12 AWG for the hot and ground conductors. All circuits for the 3 and 4-circuit systems are rated for 20 amps at 125 volts.

- Power Taps and Receptacles are used to access power. Vertical and horizontal oriented Power Taps can connect directly to a Power Distribution Assembly (PDA) with a modular connector, directly to an outlet using the corded version, or directly to building power using the hardwire version. The Modular connector version connects to one of six locations on a PDA. The corded version is available in four lengths and consist of a black insulated cord with three conductor NEMA 5-15P plug for connection to a standard metal conduit with three 12 AWG conductors. Power Taps are attached using a variety of separately specified brackets. Power Taps are circuit specific and available with common ground access only. Triplex receptacles are available to access power and are unique for the 3-circuit and both 4-circuit systems. They are available in 15 Amp (NEMA 5-15R) or 20 Amp (NEMA 5-20R) configurations with either common or isolated ground access. The 3-circuit 15 Amp receptacles are programmable to all three circuits. The 3-circuit 20 Amp receptacles and all 4-circuit receptacles are circuit specific.
- Power Taps are used to access power in Storage Base Units and are available in a modular and hardwire version. Both are described above.
- Jumpers consist of eight conductors which are enclosed in flexible metal conduit between two plastic enclosures. Jumpers' route between PDA's and is secured with safety latches. Electrical power enters PDS's attached to desk mounted utility trays through separately specified power in-feeds. Several types of in-feeds are available and allow for connection to building power from floors, columns, or the ceiling to the power system. A hardwire electrical system is also available. The desk mounted utility tray allows routing of data and communication cables in addition to power.

### Universal Rail System

The universal rail system on all Intuity configurations is an aluminum extrusion featuring an inset channel. The inset channel accepts Intuity screens (fabric, glass and laminate) and Active Components Screens and Nooks. Nooks are only for use on double sided or 120 degree double sided 3 pack applications. Refer to the individual specification guides for products selected.

### Rail Mounted Screens

Screens attach to benching rails with plastic brackets attached to the screen with threaded fasteners. This bracket assembly attaches to the bottom side of the screen and has a pressure fit into the rail. Installed screens are either 12.36" (12" high screens) or 21.36" (21" high screens) above the worksurface. Screens are available in the following materials:

- Fabric screens are made with 0.5" (12.7 mm) thick non-tackable wood composite core with fabric bonded to the faces and edges and the seams covered by a plastic spline that surrounds the edge perimeter.
- Marker boards are made with 0.5" (12.7 mm) thick wood composite core with high pressure laminate bonded to the faces and the edges capped with a 0.039" (1 mm) ABS edge.
- Laminate screens are made with 0.5" (12.7 mm) thick wood composite core with high pressure laminate bonded to the faces and the edges capped with a 0.039" (1 mm) ABS edge.
- Wood Veneer screens are made with 0.5" (12.7 mm) thick wood composite core with wood veneer bonded to the faces and edges.
- Glass screens are made with 0.240" (6 mm) thick tempered safety glass beveled on the top and sides with a radius on the upper corners.

## Technical Specifications – Intuity Benching

### Adjustable Keyboard Pads

Adjustable keyboard pads mount to the underside of a work surface. Models offer a range of common features including the following:

- Pad widths from 17" (432 mm) to 28" (711 mm).
- 360-degree pivot and storage track to permit leg swing under the work surface.
- Height adjustment ranges from 8.4" (213.4 mm) to 14" (355.6 mm) depending on the model.
- When specified, Tilting Keyboard Pads offer up to 30 degrees of tilt.
- When specified, Positive Tilt Lock option tray tilts -15°/+0°.
- A palm rest and mouse pad may be specified.

# Finish/Color Legend

## Wood Finishes

### Grade A

#### Double Cut

2P-RL	Applegate
WL-RL	Beachwood
2R-RL	Butternut
WE-RD	Dune
WJ-RE	Ebony
2N-RL	Echo
WE-RT	Melba
WC-RW	Wenge

### Grade B

#### Anegre Quarter Cut

NP-W15	Espresso
NP-W08	Golden
NP-W07	Light

#### Cherry

VC-CA1	Amber
VC-W23	American
VC-W33	Caramel
VC-W30	Heritage
VC-W32	Pacific

#### Cherry Quarter Cut

NX-U	Medium
------	--------

#### Maple

VP-LM	Light
VP-N	Natural
VP-AD	Sand

#### Maple Quarter Cut

NM-N	Natural
------	---------

#### Oak

VJ-W42	Brindle
VJ-W05	Natural

#### Rift Cut White Oak

NR-W15	Espresso
NR-W37	Fawn
NR-W40	Mocha
NR-W38	Tuxedo

#### Walnut

VR-W15	Espresso
VR-W31	Retro

#### Walnut Quarter Cut

NW-W15	Espresso
NW-W31	Retro
NW-W41	Verdant

## Laminate

### Grade A

#### Solid Color

H-34	Beige
H-AK	Chalk
H-8J	Charcoal
H-3J	Graphite
H-62	Gray Tone
H-WL	Linen
H-3P	Platinum
H-AA	Putty
H-3E	Smoke

#### Wood Grain

H-AM	Amber Cherry
H-AE	Maple
H-AD	Medium Cherry

### Grade B

#### Premium Wood Grain

H-KA	Brazilwood
H-KG	Columbian Walnut
H-KP	Field Elm
H-KN	Grey Elm
H-KM	Landmark Wood
H-KL	Neo Walnut
H-KC	New Age Oak
H-KR	Phantom Ecru
H-KS	Phantom Pearl
H-KD	River Cherry
H-KE	Sanara
H-KF	Williamsburg Cherry

## Edgeband

### Solid Color

HP-34	Beige
HP-AK	Chalk
HP-8J	Charcoal
HP-3J	Graphite
HP-62	Gray Tone
HP-WL	Linen
HP-3P	Platinum
HP-AA	Putty
HP-3E	Smoke

#### Wood Grain

HP-AM	Amber Cherry
HP-KA	Brazilwood
HP-KG	Columbian Walnut
HP-KP	Field Elm
HP-KN	Grey Elm
HP-KM	Landmark Wood
HP-AE	Maple
HP-AD	Medium Cherry
HP-KL	Neo Walnut
HP-KC	New Age Oak
HP-KR	Phantom Ecru
HP-KS	Phantom Pearl
HP-KD	River Cherry
HP-KE	Sanara
HP-KF	Williamsburg Cherry

## Trim

### Grade A

#### Smooth

TR-R	Beige
TR-AK	Chalk
TR-K	Charcoal
TR-C1	Cocoa
TR-J	Graphite
TR-G	Gray Tone
TR-AA	Putty
TR-E	Smoke
TR-PLS	Smooth Plaster
TR-FM	Snow

#### Textured

TR-TY	Cement
TR-TG	Grout
TR-TF	Pitch
TR-TW	Plaster

### Grade B

#### Smooth

TR-1C	Accent Blue
TR-1D	Accent Green
TR-1E	Accent Orange
TR-1F	Accent Red
TR-1G	Blue Jay
TR-1L	Brindle
TR-1R	Brownstone
TR-CTS	Chartreuse
TR-1N	Night
TR-1Q	Park
TR-RR	Rusty Red
TR-1M	Sable
TR-1P	Seville
TR-1J	Sky Blue
TR-1H	Terra
TR-1K	Wren

#### Smooth Metallic

TR-DM	Dark Bronze Metallic
TR-MC	Metallic Champagne
TR-LE	Metallic Silver

#### Textured Metallic

TR-AL	Alloy
TR-AR	Argent
TR-HE	Hellenic

**ALERT:** These materials are current, however they are being considered for future obsolescence due to low volume.

### Wood:

VR-W21	Mahogany Satin on Walnut
VR-W12	Naturally
WF-RC	Sorrel Double Cut

### Laminate:

H-DH	Barley Grain
H-22	Gray Spex
H-AD	Medium Cherry
H-DA	Oats Grain
H-EK	Owl Nest
H-EC	Quail Nest
H-ED	Rhea Nest
H-EA	Robin Nest
H-DE	Wheat Grain
H-21	White Spex

## Forest Stewardship Council (FSC) Statement:

In our continuing support of sustainable forestry and responsible purchasing, Haworth North America is offering FSC certified wood products at no up-charge. By providing FSC certified material, Haworth is supporting our client's green building goals and demonstrating our collective commitment to source materials more sustainably.

Haworth will provide to you the necessary FSC-certified paperwork with your shipment. For more information, FAQs, and a complete FSC product list (including product exceptions), go to the Library and search FSC.

# Vertical Fabrics/Color Legend

## Vertical Fabrics listed apply to Intuity Screens.

- To obtain fabric samples contact your authorized Haworth dealer.

(d) = Directional fabric

(n) = Non-directional fabric

- Fabric and finish availability as well as technical information are subject to change; refer to [Surfaces.Haworth.com](http://Surfaces.Haworth.com) for current information.

### Fabric Grade: A (d)

#### ETCH 100% Post Consumer Recycled Polyester

35-CM	Cameo
35-CA	Cartoon
35-CT	Circuit
35-CR	Crayon
35-DD	Doodle
35-DT	Draft
35-DR	Draw
35-MA	Marquette
35-UT	Outline
35-PA	Pastel
35-PE	Pencil
35-SP	Scratch Pad
35-SK	Sketch
35-TH	Thatch
35-TT	Tic Tac

### Fabric Grade: A (d)

#### HIGHLANDS 100% Recycled Polyester (100% REPREVE®)

L6-AG	Glen
L6-AH	Heather
L6-AL	Loch
L6-AM	Moor
L6-AP	Peat
L6-AT	Thatch

### Fabric Grade: A (d)

#### IOWA 52% Post Industrial Recycled Polyester/ 48% Post Consumer Recycled Polyester

FZ-10	Badger
FZ-6	Bixby
FZ-3	Bobwhite
FZ-2	Cedar Rock
FZ-11	Clear Lake
FZ-13	Emerson
FZ-7	Gar
FZ-9	Honeycreek
FZ-1	Manawa
FZ-5	Rice Lake
FZ-4	Trappers Bay
FZ-12	Walnut Woods
FZ-8	Wapello

### Fabric Grade: A (d)

#### POINT 100% Polyester

EE-AG	Compass
EE-AC	Decimal
EE-AF	Focal
EE-AD	Nib
EE-AA	Peak
EE-AE	Vertex

### Fabric Grade: A (d)

#### STRIAE 42% Post Industrial Recycled Polyester/ 42% Post Consumer Recycled Polyester/ 16% Polyester (84% REPREVE®)

C1-AM	Band
C1-AJ	Beam
C1-AH	Element
C1-AF	Fillet
C1-AC	Moonlight
C1-AE	Ray
C1-AK	Ribbon
C1-AD	Straws
C1-AA	Stream
C1-AL	Trace

### Fabric Grade A (d)

#### TAILORED 100% Post Consumer Recycled Polyester

PY-AL	Alter
PY-BU	Buttons
PY-DR	Draper
PY-FC	French Chalk
PY-HE	Hem
PY-MA	Mannequin
PY-SE	Seam
PY-SH	Shears
PY-SU	Suit
PY-TH	Thread
PY-TR	Tradition

### Fabric Grade: A (d)

#### TATAMI 100% Polyester

W5-1	Agave
W5-2	Coir
W5-3	Geta
W5-4	Hemp
W5-5	Jute
W5-6	Kayar
W5-7	Kobe
W5-8	Saffron
W5-9	Sapporo
W5-10	Sisal
W5-12	Tabi
W5-11	Tesori

### Fabric Grade: A (n)

#### TELLURE 100% Polyester

3A-31	Aegean
3A-18	Black
3A-45	Buff
3A-53	Cayenne
3A-40	Chocolate
3A-49	Dove
3A-28	Dynamo
3A-54	Goose
3A-23	Jodhpurs
3A-33	Miami
3A-19	Navy
3A-06	Nickel
3A-34	Ocean
3A-46	Parrot
3A-50	Peel
3A-47	Pumpkin
3A-44	Roan
3A-51	Rust
3A-37	Spring
3A-48	Sprout
3A-52	Sunset
3A-43	Tomato

### Fabric Grade A (d)

#### TUSCAN 65% Post Industrial Recycled Polyester/ 35% Post Consumer Recycled Polyester (35% REPREVE®)

TK-AR	Arno
TK-CA	Carrara
TK-DA	David
TK-ET	Etruscan
TK-FL	Florence
TK-LM	Limoncello
TK-MA	Masonry
TK-ME	Medici
TK-TR	Olive Tree
TK-PS	Pisa
TK-RM	Romanesque
TK-RU	Rustic
TK-SE	Siena

### Fabric Grade: B (d)

#### CAMP 100% Post Consumer Recycled Polyester

33-CF	Campfire
33-CA	Canoe
33-CT	Cot
33-DK	Docks
33-FF	Firefly
33-FR	Forest
33-GR	Granola
33-GL	Grill
33-JA	Jamboree
33-PD	Pond
33-RA	Rain
33-SC	Scout
33-SM	Smore
33-TE	Tent

### Fabric Grade: B (d)

#### CLASSIC 82% Recycled Polyester/ 18% Polyester (82% REPREVE®)

L5-AJ	Art
L5-AG	Car
L5-AF	Comedy
L5-AR	Dance
L5-AH	Design
L5-AD	Drama
L5-AT	Movie
L5-AA	Musical
L5-AC	Radio
L5-AS	Song

### Fabric Grade: B (d)

#### FIELDS 50% Post Consumer Recycled Polyester/ 50% Virgin Polyester

34-AL	Alfalfa
34-BB	Blueberry
34-CN	Corn
34-CT	Cotton
34-OA	Oats
34-PL	Plow
34-PR	Prairie
34-PK	Pumpkin
34-SC	Scarecrow
34-SY	Soy
34-ST	Strawberry
34-TL	Till
34-WH	Wheat

### Fabric Grade: B (d)

#### HUE 62% Antimony Free Polyester/ 38% Virgin Polyester

6-BK	Bark
6-ED	Eddy
6-FR	Froth
6-GK	Ginko
6-LT	Latte
6-LF	Leaf
6-LM	Lemon
6-MG	Marigold
6-MR	Marine
6-PP	Poppy
6-RD	Red
6-SS	Seaside
6-SP	Spring
6-ST	Steam
6-TQ	Turquoise
6-WP	Wisp

### Fabric Grade: B (d)

#### KIO 100% Recycled Polyester

ZR-6	Bennett
ZR-8	Cascade
ZR-7	Crew
ZR-5	FUD
ZR-3	Jeanlin
ZR-1	Jib
ZR-11	Reeds Lake
ZR-13	Regatta
ZR-10	Sailor
ZR-2	Sentra
ZR-12	Smurf
ZR-9	TSJ
ZR-4	Yippi Kio

# Vertical Fabrics/Color Legend

**Fabric Grade: B** <sup>(d)</sup>  
**PECA**
**51% Virgin Polyester/  
49% Antimony Free  
Polyester**

32-BE	Bead
32-CH	Chip
32-DT	Dots
32-EL	Elfin
32-JT	Jot
32-MN	Minnow
32-MS	Mouse
32-PW	Pee Wee
32-SE	Seed
32-SM	Smidge
32-TA	Tad
32-TT	Title
32-TR	Trifle
32-TY	Tyne

**Fabric Grade: B** <sup>(n)</sup>  
**PUZZLER**
**48% Post Industrial  
Recycled Polyester/  
52% Post Consumer  
Recycled Polyester**

7L-C	Clue
7L-CR	Cryptic
7L-E	Enigma
7L-I	Intrigue
7L-M	Maze
7L-R	Riddle

**Fabric Grade: B** <sup>(d)</sup>  
**REVERB**
**100% Post Consumer  
Recycled Polyester**

3V-BM	Boomy
3V-BN	Bounce
3V-CR	Crackle
3V-EC	Echo
3V-GN	Gong
3V-HA	Harmonics
3V-MG	Moog
3V-MR	Murmur
3V-PN	Ping
3V-RF	Rifts
3V-RN	Ring
3V-SN	Snare
3V-SC	Sonic
3V-SY	Synth
3V-TM	Timbers
3V-WF	Waft

**Fabric Grade B** <sup>(d)</sup>  
**RITZ**
**49% Post Industrial  
Recycled Polyester/  
51% Post Consumer  
Recycled Polyester  
(51% REPREVE®)**

PV-BR	Bravo
PV-BT	Black Tie
PV-CA	Candle Light
PV-CH	Champagne
PV-CL	Classy
PV-CT	Class Act
PV-FR	Formal
PV-VA	Ovation
PV-WT	White Tie

**Fabric Grade: B** <sup>(d)</sup>  
**SHIMMER**
**100% Recycled Polyester**

WS-5	Cellophane
WS-8	Copper
WS-13	Dew
WS-14	Diamond
WS-9	Flaxen
WS-4	Gems
WS-11	Glass
WS-1	Glitter
WS-10	Mirage
WS-16	Mirror
WS-2	Moonlight
WS-6	Puddle
WS-15	Reflection
WS-12	Stars
WS-3	Water
WS-7	Wet Grass

**Fabric Grade: B** <sup>(d)</sup>  
**TRAFFIC**
**24% Post Industrial  
Recycled Polyester/  
76% Post Consumer  
Recycled Polyester**

WZ-9	Autobon
WZ-6	Country Drive
WZ-7	Freeway
WZ-5	Gridlock
WZ-1	Jam
WZ-3	Merge
WZ-8	Route 66
WZ-4	Ticket
WZ-2	Yield

**Fabric Grade C** <sup>(d)</sup>  
**BIRDS NEST**
**38% Post Industrial  
Recycled Polyester/  
20% Post Consumer  
Recycled Polyester/  
42% Recycled Polyester  
(20% REPREVE®)**

PH-CA	Canary
PH-EA	Eagle
PH-EG	Egret
PH-FA	Falcon
PH-HE	Heron
PH-HU	Hummingbird
PH-MD	Morning Dove
PH-NU	Nuthatch
PH-WL	Owl
PH-RA	Raven
PH-SA	Sandpiper
PH-ST	Stork
PH-SW	Swan

**Fabric Grade C** <sup>(d)</sup>  
**GEODE**
**34% Post Industrial  
Recycled Polyester/  
26% Post Consumer  
Recycled Polyester/  
40% Recycled Polyester  
(26% REPREVE®)**

PR-BS	Bismuth
PR-CA	Calcite
PR-CT	Citrine
PR-CR	Crystal
PR-FL	Fluorite
PR-GA	Galena
PR-HL	Hollow
PR-MA	Malachite
PR-QU	Quartz
PR-WN	Wonder

**Fabric Grade: C** <sup>(d)</sup>  
**THORMAN**
**48% Post Industrial  
Recycled Polyester/  
26% Post Consumer  
Recycled 26% Polyester**

45-DR	Dryden
45-EC	Eclipse
45-FR	Farm
45-FL	Flamingo
45-HS	Hope St
45-KV	Kevin
45-MR	Martini
45-SM	Sam
45-TH	Theatre

**Fabric Grade: D** <sup>(d)</sup>  
**TANGRAM**
**57% Polyester/  
28% Post Industrial  
Recycled Polyester/  
15% Post Consumer  
Recycled Polyester**

LV-CL	Clue
LV-EN	Enigma
LV-GU	Guess
LV-MA	Maze
LV-MU	Muse
LV-MT	Mystery
LV-MY	Mystify
LV-UT	Outline
LV-PE	Perplex
LV-PC	Pieces
LV-PU	Puzzle
LV-RD	Riddle
LV-SC	Scrabble
LV-SL	Solve
LV-TE	Teaser
LV-TR	Trick

**ALERT:** These materials are current, however they are being considered for future obsolescence due to low volume.

**Fabric Grade: A** <sup>(d)</sup>  
**SAVOY**
**51% Virgin Polyester/  
49% Recycled Polyester**

FJ-CC	Apache
FJ-AD	Balsam
FJ-AP	Bisque
FJ-AE	Blue Ridge
FJ-AA	Blue Willow
FJ-CA	Breaker
FJ-AR	Chamois
FJ-AK	Elephant
FJ-AL	Glacier
FJ-AX	Mango
FJ-AY	Maya
FJ-AW	Poplar
FJ-CD	Raisen
FJ-AT	Shallot
FJ-AM	Stainless
FJ-AF	Tempest

**Fabric Grade: B** <sup>(d)</sup>  
**LANDSCAPE**
**100% Recycled Polyester**

C2-AD	Estate
C2-AH	Harvest
C2-AJ	Panorama
C2-AF	Parkland
C2-AC	Photograph
C2-AE	Seascape
C2-AA	Vista

**Haworth+**

For information on the Haworth+ alliance program, including images and product availability, please refer to: [Surfaces.Haworth.com](https://surfaces.haworth.com)

**Customer's Own Material (COM)**

For general Customer's Own Material (COM) information including processes and forms, please refer to: [surfaces.haworth.com](https://surfaces.haworth.com) > Resources > COM

For information on approved COM's, please refer to: [surfaces.haworth.com](https://surfaces.haworth.com) > COM Library



# Seating Fabrics/Color Legend

- The following fabrics are available on Seating and cushions.

(d) = Directional fabric (n) = Non-directional fabric

- To obtain fabric samples contact your authorized Haworth dealer.
- Fabric and finish availability as well as technical information are subject to change; refer to Surfaces.Haworth.com for current information.

## Fabric Grade: A (d) BLANKET 50% Post Consumer Recycled Polyester, 50% Virgin Polyester

4H-BE Beach  
4H-BD Bindle  
4H-CL Cloak  
4H-FE Feather  
4H-FW Firewheel  
4H-FT Fort  
4H-GR Grass  
4H-HD Hood  
4H-MA Mackinaw  
4H-MT Manta  
4H-PN Picnic  
4H-PC Poncho  
4H-SW Swag  
4H-SP Sweep  
4H-TK Tuck  
4H-YA Yawn

## Fabric Grade: A (d) HORIZON 100% Polyester 1N-001 Beeline 1N-004 Birdseye 1N-003 Border 1N-002 Compass 1N-005 Panorama 1N-008 Skyline 1N-006 Sweep 1N-007 Vista

## Fabric Grade: A (d) MORSE 100% Polyester 4J-BP Blip 4J-CA Cable 4J-CD Code 4J-DA Dash 4J-DT Dot 4J-MA Marconi 4J-RA Radio 4J-SS S.O.S. 4J-SC Scribe 4J-TA Tap 4J-TE Telegraph 4J-TR Transmit 4J-WL Wireless

## Fabric Grade: A (d) PIXEL 51% Polyester, 32% Post Industrial Recycled Polyester, 17% Post Consumer Recycled Polyester 2A-BY Byte 2A-DC Dice 2A-DT Dot 2A-EA Easel 2A-FT Flaunt 2A-FC Focus 2A-FL Folio 2A-HM Home 2A-IK Ikon 2A-IM Imagine 2A-ND Node 2A-PM Pomp 2A-RA Raster 2A-SP Spectral 2A-TA Tab 2A-VE Vertex

## Fabric Grade: A (n) TELLURE 100% Polyester 3A-31 Aegean 3A-18 Black 3A-45 Buff 3A-53 Cayenne 3A-40 Chocolate 3A-49 Dove 3A-28 Dynamo 3A-54 Goose 3A-23 Jodhpurs 3A-33 Miami 3A-19 Navy 3A-06 Nickel 3A-34 Ocean 3A-46 Parrot 3A-50 Peel 3A-47 Pumpkin 3A-44 Roan 3A-51 Rust 3A-37 Spring 3A-48 Sprout 3A-52 Sunset 3A-43 Tomato

## Fabric Grade: A (d) TWIST 80% Post Consumer Recycled Polyester, 20% from Rayon Bamboo MM-AS And Shout MM-C Coil MM-CS Corkscrew MM-CU Curl MM-D DNA MM-I Ivy MM-P Plot MM-SW Sidewinder MM-S Snail MM-SP Spire MM-WH Whirlpool MM-W Winding

## Fabric Grade: A (n) WELLINGTON FAUX LEATHER 100% Polyurethane XJ-BL Black XJ-BU Buff XJ-EL Elephant XJ-JA Java XJ-PA Pacific XJ-SA Sage XJ-ST Storm XJ-TA Tangelo XJ-WI Wine

## Fabric Grade: B (d) ALIGN 97% Post Industrial Recycled Nylon, 3% Post Consumer Recycled Nylon 4F-AR Array 4F-FC Focus 4F-LM Limerick 4F-OR Orient 4F-PK Picket 4F-RT Root 4F-SC Scrimmage 4F-SP Spring 4F-TA Tangent 4F-TL Tree Line 4F-WR Wire

## Fabric Grade: B (d) DIAGONALE 16% Nylon, 84% Polyester 4N-AC Across 4N-BA Bias 4N-CH Chevron 4N-CR Crosscut 4N-DA Diamond 4N-FE Featherstitch 4N-HT Half Timber 4N-KC Kitty Corner 4N-MA Matrix 4N-OB Oblique 4N-SE Serge 4N-ST Slant 4N-SH Slash 4N-SL Slope 4N-WC Whipcord 4N-ZZ Zig Zag

## Fabric Grade: B (d) ENGLISH TWEED 92% Polyester, 5% Post Industrial Recycled Polyester, 3% Post Consumer Recycled Polyester 4E-BS Biscuit 4E-BL Blimey 4E-BN Bonnet 4E-CT Cottage 4E-DW Doctor Who 4E-FX Fox 4E-ML My Lady 4E-XD Oxford 4E-PE Pipe 4E-SH Sherry 4E-SN Stilton 4E-ST Stout 4E-TE Tea 4E-TU Tudor

## Fabric Grade: B (d) JEWEL 77% Post Industrial Recycled Polyester, 23% Post Consumer Recycled Polyester MN-AM Amber MN-A Aquamarine MN-C Citrine MN-E Emerald MN-G Garnet MN-J Jade MN-M Malachite MN-R Ruby MN-S Sapphire MN-TE Tiger's Eye

## Fabric Grade: B (d) LEEF 49% Post Industrial Recycled Polyester 51% Post Consumer Recycled Polyester ML-A Aspen ML-B Beet ML-C Coca ML-CN Coconut ML-F Fennel ML-HE Henna ML-H Hosta ML-HY Hydrangea ML-M Moonflower ML-PE Petunia ML-P Pumpkin ML-S Sunflower ML-V Violet

## Fabric Grade: B (d) MOODRING 100% Recycled Polyester NQ-4 Calm NQ-24 Cheerful NQ-3 Cool NQ-21 Grounded NQ-25 Happy NQ-22 Inspired NQ-23 Intense NQ-8 Joy NQ-10 Liberate NQ-28 Peaceful NQ-26 Restful NQ-27 Zen

## Fabric Grade: B (d) RAMIE 62% Polyester, 25% Post Industrial Recycled Polyester, 13% Post Consumer Recycled Polyester 4V-BS Basket 4V-BT Bast 4V-FX Foxtail 4V-GN Gunnie 4V-HY Hay 4V-MC Macrame 4V-ML Millet 4V-MB Mulberry 4V-RN Rain 4V-RD Reed 4V-RT Root 4V-SC Sack Cloth 4V-SS Sisal 4V-TH Thatch 4V-WT Water 4V-WD Weed

## Fabric Grade: B (d) TECH 100% Post Consumer Recycled Polyester MV-AI A.I. MV-AN Anatomy MV-A Aviation MV-B Bionics MV-C Cosmos MV-D Disc MV-E Electric MV-F Forestry MV-L Logic MV-P Optics MV-RA Radio MV-R Rocket MV-SF Sci-Fi MV-S Skill MV-T Theory MV-Z Zoology

## Fabric Grade: C (d) KING 100% Polyester LH-BE Beige LH-DB Dark Blue LH-DG Dark Green LH-DM Dark Mustard LH-GD Gold LH-GL Light Green LH-LG Light Grey LH-MB Medium Blue LH-MG Medium Grey LH-RD Red LH-RG Orange LH-WG Warm Grey

## Fabric Grade: C (d) MAYA 100% Polyester LM-DB Dark Blue LM-GR Green LM-GY Golden Yellow LM-MG Medium Cool Grey LM-WG Medium Warm Grey LM-RG Orange

## Seating Fabrics/Color Legend

**Fabric Grade: C** (d)**SMALL ARROW**

**46% Virgin Nylon,  
54% Post Industrial  
Recycled Nylon**

4L-AR	Archer
4L-BA	Barb
4L-CR	Crossbow
4L-DA	Dart
4L-FL	Fletcher
4L-MA	Mark
4L-NK	Nock
4L-QU	Quiver
4L-RE	Reed
4L-RL	Release
4L-ST	Shaft
4L-SH	Sharp
4L-TA	Target

**Fabric Grade: D** (d)**BIG ARROW**

**100% Post Consumer  
Recycled Polyester**

4D-BS	Bisque
4D-BL	Blue
4D-CN	Cool Neutral
4D-DB	Dark Blue
4D-GD	Gold
4D-GR	Green
4D-MG	Medium Grey
4D-RE	Red
4D-SA	Salmon
4D-WN	Warm Neutral

**Fabric Grade: D** (d)**BIG DIAGONALE**

**66% Post Consumer  
Recycled Polyester  
34% Post Industrial  
Recycled Polyester**

1K-AM	Amber
1K-BL	Balsam
1K-CR	Carbon
1K-ER	Earth
1K-HN	Henna
1K-MN	Mineral
1K-PR	Parrot
1K-RD	Red
1K-RS	Rosa
1K-SE	Sea
1K-TR	Terracotta
1K-ZF	Zaffer

**Fabric Grade: D** (d)**CLASS**

**100% Polyester**

LE-DG	Dark Grey
LE-GM	Green Multi
LE-GR	Green
LE-LN	Light Cool Neutral
LE-MB	Medium Blue
LE-MN	Medium Warm Neutral
LE-RR	Reddish Orange

**Fabric Grade D** (n)**COTSWOLD**

**100% Wool**

JB-AN	Anquilla
JB-BR	Bottlegrass
JB-CA	Camp
JB-DN	Dandelion
JB-ED	Editor Blue
JB-GS	Goldfish
JB-HA	Heart
JB-KE	Kokanee
JB-NE	Nettle Bellflower
JB-PL	Pickeral Weed
JB-SA	Sand
JB-SD	Silver Dollar
JB-SU	Silverbush
JB-SC	Soft Charcoal
JB-TR	Tree
JB-WE	Wheaton

**Fabric Grade: D** (d)**DOTS**

**72.7% Post Consumer  
Recycled Polyester**

**27.3% Post Industrial  
Recycled Nylon**

6K-CL	Clay
6K-VY	Ivy
6K-LM	Lemon
6K-MN	Mandarin
6K-MS	Mist
6K-NG	Night
6K-SH	Shadow
6K-WT	Water

**Fabric Grade: D** (d)**ELEMENT**

**76% Post Consumer  
Recycled Polyester  
24% Rayon**

4Z-ER	Earth
4Z-ES	Essence
4Z-FR	Fire
4Z-FS	Fossil
4Z-HR	Herbal
4Z-LG	Logic
4Z-LY	Lyrical
4Z-PL	Pillar
4Z-PT	Poetic
4Z-RR	Rare
4Z-RT	Root
4Z-SC	Scenic
4Z-TH	Thread
4Z-TM	Timeless
4Z-TR	Truth
4Z-WN	Wind

**Fabric Grade: D** (d)**MAIN LINE FLAX**

**70% Virgin Wood  
30% Flax**

6M-AL	Aldgate
6M-AR	Archway
6M-BN	Bank
6M-BY	Bayswater
6M-BT	Bethnal
6M-BR	Brompton
6M-CM	Camden
6M-GL	Goldhawk
6M-LM	Lambeth
6M-LY	Leyton
6M-MN	Monument
6M-ST	Stanmore
6M-TM	Temple
6M-TW	Tower
6M-TF	Tufnell
6M-WS	Westminster

**Fabric Grade: D** (d)**NOTABLE**

**28% Virgin Nylon,  
72% Post Industrial  
Recycled Nylon**

4K-BR	Bravo
4K-CT	Concert
4K-DR	Dramatic
4K-EN	Entertain
4K-MA	Magic
4K-MT	Matinee
4K-PA	Pantomime
4K-PE	Perform
4K-PL	Play
4K-PT	Plot
4K-PR	Practice
4K-SC	Script
4K-SH	Show
4K-SK	Skit
4K-ST	Star
4K-TH	Theatrical

**Fabric Grade: D** (d)**TANGRAM**

**57% Polyester,  
28% Post Industrial  
Recycled Polyester,  
15% Post Consumer  
Recycled Polyester  
(43% REPPEVE)**

LV-CL	Clue
LV-EN	Enigma
LV-GU	Guess
LV-MA	Maze
LV-MU	Muse
LV-MT	Mystery
LV-MY	Mystify
LV-UT	Outline
LV-PE	Perplex
LV-PC	Pieces
LV-PU	Puzzle
LV-RD	Riddle
LV-SC	Scrabble
LV-SL	Solve
LV-TE	Teaser
LV-TR	Trick

**Fabric Grade: E** (d)**BRISA FAUX LEATHER**

**100% Polyurethane face,  
65% Polyester,  
35% Rayon Backing**

XG-23	Apple Green
XG-22	Ash
XG-3	Aztec
XG-28	Birch
XG-12	Black Onxy
XG-25	Blossom
XG-5	Cambridge Blue
XG-26	Coffee Bean
XG-20	New Sand
XG-18	Night Navy
XG-21	Pompeian Red
XG-1	Salsa
XG-27	Shitake
XG-24	Skyway
XG-17	Sterling Blue
XG-13	White

**ALERT:** These materials are current, however they are being considered for future obsolescence due to low volume.

**Fabric Grade: A** (d)**BARQUE**

**69% Polyester,  
31% Recycled Polyester  
(31% REPPEVE)**

07-AH	Ash
07-AS	Aspen
07-BR	Birch
07-BW	Black Walnut
07-CN	Chestnut
07-GO	Golden Oak
07-RB	Redbud
07-WL	Willow

**Fabric Grade: A** (d)**DOTTIE**

**89% Post Industrial  
Recycled Polyester,  
11% Post Consumer  
Recycled Polyester**

ME-CA	Calico
ME-C	Chads
ME-DD	Dew Drops
ME-F	Flecks
ME-M	Morse
ME-P	Pip
ME-PD	Polka Dots
ME-R	Roulette
ME-T	Tabby
ME-Y	Yahtzee

**Fabric Grade: A** (d)**GAUGE**

**100% Recycled Polyester**

1X-05	Depth
1X-04	Gas
1X-11	Narrow
1X-08	Pressure
1X-02	Rain
1X-12	Sea
1X-13	Standard
1X-10	Test
1X-03	Time
1X-09	Water
1X-06	Weather
1X-01	Wind
1X-07	Wire

**Haworth+**

For information on the Haworth+ alliance program, including images and product availability, please refer to:  
[surfaces.haworth.com](https://surfaces.haworth.com) > Haworth+ Library

**Customer's Own Material (COM)**

For general Customer's Own Material (COM) information including processes and forms, please refer to:  
[surfaces.haworth.com](https://surfaces.haworth.com) > Resources > COM

For information on approved COM's, please refer to:  
[surfaces.haworth.com](https://surfaces.haworth.com) > COM Library

**Fabric Grade: A** (d)**ZINGER**

**37% Recycled Polyester,  
63% Polyester  
(13% REPPEVE)**

NI-2	BBQ
NI-17	Beluga
NI-10	Bluegill
NI-8	Chips
NI-11	Classic
NI-16	Concord
NI-13	Frog
NI-15	Glade
NI-9	Grain
NI-12	Granny
NI-4	Gravel
NI-18	Kiwi
NI-20	Mulberry
NI-3	Onion
NI-6	Pacific
NI-1	Roan
NI-21	Tar
NI-7	Wagon
NI-19	Wicker
NI-5	Wolf

**Fabric Grade: B** (d)**COCKTAIL**

**100% Eco-Intelligent<sup>®</sup>  
Polyester**

**MBDC Cradle to Cradle Gold**

1W-12	Black Cow
1W-08	Blue Moon
1W-13	Boilermaker
1W-01	Bubbly
1W-03	Gibson
1W-04	Grasshopper
1W-07	Lounge
1W-16	Margarita
1W-10	Martini
1W-14	Mojito
1W-11	Old Fashion
1W-06	Pink Squirrel
1W-15	Sidecar
1W-09	Stinger
1W-02	Stout
1W-05	Swizzle



# North American Terms of Sale

**These Terms of Sale are part of a quotation, bid response, or other sales document issued by Haworth, Inc., Haworth, Ltd. ("Haworth").**

**These Terms of Sale do not cover products manufactured in North America shipping to non-North American countries nor do they cover products manufactured in non-North American countries shipping to North America. For those terms of sale, please contact Haworth's Global Trade and Compliance Department at 616.393.3000 or through Haworth.com.**

## A. Ordering Information

Haworth sells its products on the terms set forth in these standard Terms of Sale:

ORDERS MUST BE SUBMITTED IN WRITING OR ELECTRONICALLY (Lynx) AS REPRESENTED BY A VALID PURCHASE ORDER, WHICH INCLUDES PRODUCT TOTAL.

An order is not binding upon Haworth until Haworth issues an order acknowledgment to the customer (the "Customer"), which will include price information and an anticipated delivery date.

### 1. Order Changes/Cancellations

For Specials, Customer's Own Material (C.O.M.), finish matches, custom colors, custom products, Master lock and key orders, and RUSH orders, no changes or cancellations are allowed 24 hours after order placement. All other products require approval for changes or cancellations. A change/cancellation fee may apply. Contact Order Services for applicable charges.

Ship-to addresses changed within five (5) business days of delivery will incur fees to cover administrative costs due to re-labeling of product and/or reconsignment fees with the carrier.

Order cancellations are complete annulments of orders. Order changes are the deletion of line items or a change in size, color, quantity, ship-to address, or scope of work. There is no penalty for additions; however, any change may cause the order or the line items affected to be rescheduled. Order changes involving additional product and services which increase the value must be accompanied by an amended Purchase Order or other document as agreed.

ALL CHANGES MUST BE IN WRITING, REGARDLESS OF THE (DOLLAR) VALUE. CHANGES ARE NOT BINDING UPON HAWORTH UNTIL HAWORTH ISSUES AN ACKNOWLEDGMENT OF THE CHANGE.

### 2. C.O.M. (Customer's Own Material)

A Customer who requests a fabric, surface or finish material (C.O.M.) not in Haworth's standard finish offering must first confirm approval of or request new approval for the C.O.M.

Haworth will determine feasibility of the material for manufacturability. For a description of the procedure to submit C.O.M. samples, contact Haworth's Order Services department. For testing information, see the C.O.M. section of the catalog, or call Haworth Order Services.

If Haworth agrees to use the C.O.M., (1) Haworth shall have no responsibility for the condition, quality, value, performance, physical properties, or any other aspect of the C.O.M.; and (2) Haworth shall have no liability for any damages, injuries, or losses to the Customer or to any third party that shall be caused by any C.O.M., and the Customer shall hold Haworth harmless for all such liability.

### 3. Valid/Complete Purchase Order

The following information is required in order to process an order with Haworth:

#### a. Customer Information

- i. **Sold To:** Legal name, complete address (if Haworth is to bill the end user, provide end user Purchase Order made out to Haworth, Inc., Haworth, Ltd.) and phone and fax number.
- ii. **Ship To:** Legal name and address.
- iii. **Purchase Order Number:** From the party Haworth will be billing.
- iv. **Authorized Signature:** All Purchase Orders must be signed by a duly authorized representative if a signature line is present. Electronically transmitted Purchase Orders will be accepted without a signature if dealer billed and the dealer has an electronic purchase payment agreement on file.
- v. **Contact Name and Phone Number:** Person Haworth should contact with any questions regarding the order.
- vi. **Shipping Contact:** Name and phone number of person to be contacted regarding shipping and delivery matters.
- vii. **Tagging Instructions:** This information will appear on all documentation received from Haworth including: cartons, acknowledgments, and invoices.
- viii. **Price Agreement or National Sales Agreement Number**
- ix. **Product Total:** Net dollars.
- x. **Installation, Design, Project Management, and/or Service Fees**

#### b. Product Information

- i. **Quantity**
- ii. **Product Numbers**
- iii. **Colors**
- iv. **Specials:** Specify special part number for new special products.
- v. **Customer's Own Material:** Order entry code, manufacturer, pattern, and color.

- vi. **Approval Drawings:** An authorized signature by a duly authorized representative is required for shop drawings when applicable.

- vii. A deposit may be required for custom materials.

#### c. Order Confirmation

All orders will be acknowledged.

## B. Pricing Policies

### 1. Terms of Payment

Terms of payment and credit limits will be established based on financial information. Standard payment terms on open credit are net thirty (30) days from invoice date. Advance payments or other payment security may be required by Haworth. The account balance must be at or below the credit limit and current at all times (no past-due balances). Haworth reserves the right to delay or cancel any delivery to a Customer whose Haworth account balance is over the credit limit and/or past due. For walls and floors a deposit will be required.

### 2. Terms of Credit

Customer hereby authorizes Haworth to obtain such credit reports, financial information or other information as Haworth may request, including, without limitation, credit information from any financial institutions or others having a business relationship with the Customer. Customer hereby authorizes any credit references to answer Haworth's inquiries and provide such credit information and documentation as Haworth may request.

The Customer hereby releases and holds Haworth harmless for any inconvenience whatsoever, caused by any temporary or permanent withdrawal or restriction of credit privileges hereunder, or the enforcement of any of the provisions contained in this paragraph.

### 3. Past-Due Charges

Past-due balances will be increased by a maximum of 1.5% per month, or 18% annually, without forfeit of Haworth's right to immediate payment.

### 4. Applicable Prices

**The price of any product sold to Customer by Haworth will be based upon the North American Price List (Catalog).**

Prices and discounts are subject to change without notice or approval. In the event of an adjustment to pricing, National Sales Agreement (NSA) Customers will be notified in advance according to the terms of the NSA.

Applicable prices and currency exchange rates are those in effect at the time of the RECEIPT of an **ORDER**; Haworth reserves the right to use the published pricing effective at the time of shipment, if the requested delivery date is more than 120 days after the order receipt date.

# North American Terms of Sale

Haworth Flooring products are sold using the North American price list in US dollars. Currency exchange rates at the time of the transaction will be used to convert the USD amount into the alternate currency. Should the currency exchange rate between the USD and alternate currency change between a quote and the receipt of an order, the alternate currency amount will also change to equal the current, equivalent USD amount.

## 5. C.O.M. (Customer's Own Material) Charges

Refer to appropriate Customer's Own Material (C.O.M.) form for applicable surface material charges.

## 6. Taxes

Haworth prices do not include customs duty, sales, use, value added or similar taxes. Any federal, state/provincial or other taxes or assessments based upon the sale or delivery of products or services sold applicable to the customer at present or later imposed by federal, state/provincial or municipal agencies, shall be added and paid by the customer. Customer is responsible for all such taxes.

**NOTE:** For all countries a valid sales tax exemption certificate must be approved by and on file with Haworth prior to product shipment. Otherwise, sales tax will be due and payable to Haworth when such tax is invoiced to Customer.

## 7. Services

If, as a result of Customer request, the Haworth dealer or Haworth subsidiary provides planning/design services, storage, project management, special handling, set-up, installation and/or other services, the Customer will be charged at the local Haworth dealer/subsidiary's prevailing rates.

## 8. Termination by Haworth

Haworth may immediately terminate an order upon written notice in the event bankruptcy or insolvency proceedings are instituted by or against the Customer, or the Customer is adjudicated as bankrupt, becomes insolvent, makes an assignment for the benefit of creditors, or proposes or makes any arrangements for the liquidation of its debts, or a receiver or receiver and manager is appointed with respect to all or any part of the assets of the Customer.

## C. Shipping and Delivery

Haworth will have the right to determine the method of shipment and routing of product.

This section does not apply to any of Haworth's Flooring products. All Haworth Flooring products are sold freight collect.

If, for any reason, a delivery has to be made to an intermediate location (i.e. a location other than the "Ship To" location noted on the order or ultimate end user location), all handling and re-delivery costs incurred would be at the Customer's expense.

### 1. U.S.A. - Contiguous

All deliveries will be CPT (Carriage Paid To) (ICC Incoterms 2010) Haworth's manufacturing facilities or distribution centers. Freight charges will be prepaid by Haworth on all orders to locations within the continental United States. Customer bears all risk of loss or damage to the goods when they are placed on Haworth's means of transport.

### 2. U.S.A. - Non-contiguous (Alaska, Hawaii and Puerto Rico)

All deliveries will be CIF (Cost, Insurance and Freight) (ICC Incoterms 2010). Haworth's catalog prices include ocean freight and insurance to the port of the final destination. Haworth has the right to determine the carrier, method of shipment and routing. Haworth will contract with the insurer and provide minimal insurance coverage (CIF @ 110%) made payable to the Customer. Customer is responsible to obtain greater insurance if so desired.

Customer bears all risk of loss or damage to the goods when the goods are effectively at the disposal of the Customer on board the vessel at the named port of destination. Proof of delivery is a clean on board bill of lading. Customer will be responsible for all on-carriage from the receiving port to the final destination.

### 3. Canada

All deliveries will be DDP (Delivered Duty Paid) (ICC Incoterms 2010). Haworth's catalog prices include delivery to Customer's named place, not unloaded from any arriving means of transport. Customer bears all risk of loss or damage to the goods when they are delivered to the Customer's named facility not unloaded. Haworth will assume responsibility to file all freight claims with the carrier for any loss/damage which may occur while product is in transit, and will promptly repair or replace any damaged or lost product. Haworth requires the Customer to report all freight damage and/or loss to both the carrier and to Haworth.

**NOTE:** Under all delivery terms (U.S.A. and Canada), any additional expense resulting from Customer's request for expedited transportation, special services, packaging, handling, routing, and/or shipping method will be billed to Customer.

### 4. Mexico

All deliveries will be DAP (Delivered to Place) (ICC Incoterms 2010). Haworth's catalog prices include freight charges for normal surface transportation to a United States point of exportation within the 48

contiguous states. Haworth has the right to determine the carrier, method of shipment and routing.

Customer bears all risk of loss or damage to the goods when the goods are delivered to the named United States point of exportation. Haworth will provide customs clearance facilitation and arrangement of local delivery through an Authorized Dealer in Mexico, on a separately negotiated basis. Otherwise the Customer will be responsible for all customs clearance formalities and on-carriage from the United States point of exportation to the final destination in Mexico.

### 5. Delivery Dates and Delay

If Haworth cannot deliver products as scheduled due to causes beyond its reasonable control (such as casualty, labor disputes, or accident; inability to obtain necessary labor, material or transportation; or changes requested by the Customer), the delivery date will be extended to compensate for the delay as determined by Haworth.

### 6. Delivery Shortages and Damage

Product shortages and damage must be noted on delivery receipts at the time of delivery and reported to the carrier for correction.

Claims against Haworth for shortages, errors, or damage must be made within ten (10) days of the date of delivery or the Customer waives the right to make such a claim. Signed Bill of Ladings or Delivery Receipt must be sent in with claims. See the Haworth/Haworth Dealers Roles and Responsibilities document for further details.

### 7. Storage

Haworth may transfer product to storage at the Customer's risk and expense if the Customer is unable or unwilling to take delivery of product as originally scheduled. Upon such transfer to storage, the Customer assumes risk of loss. Haworth will invoice the Customer for storage fees and the Customer will make payments in accordance with Haworth's standard payment terms.

# North American Terms of Sale

## D. General Terms

### 1. Governing Law

For products purchased for delivery in the U.S. pursuant hereto, this Agreement shall be governed by and construed according to the laws of the State of Michigan. Where Products are purchased for delivery in Canada pursuant hereto, this Agreement shall be governed by and construed according to the laws of the Province of Alberta. In either case, the parties attorn to the exclusive jurisdiction of the courts of Michigan and Alberta, respectively for the purpose of hearing any disputes arising under this Agreement or with respect to any Products sold pursuant hereto, and agree that the provisions of the United Nations Convention on Contracts for the International Sale of Goods and any other provision or law which would have the effect of applying the laws of any jurisdiction other than Michigan or Alberta, as the case may be, shall be excluded.

### 2. Force Majeure

In the event that the performance of Customer or Haworth or its participating dealer assignee(s) would be prevented, restricted, interfered with or rendered commercially impracticable by reason of Force Majeure, then upon the giving of notice to the other parties, the party affected by the Force Majeure shall be excused from performing hereunder until the Force Majeure no longer prevents, restricts, interferes with, or renders such performance commercially impracticable.

"Force Majeure" shall mean: fire, explosion, breakdown of plant, epidemic, hailstorm, snow/ice storms en route, hurricane, tornado, cyclone, flood or power failure; war, revolution, civil or military disturbances, acts of public enemies, acts of terrorism, blockade or embargo; any law, order, proclamation, regulation, ordinance, demand or requirement of any applicable governmental authority or any subdivision, authority, or representative of any such government; labor difficulties, including without limitation, strikes, slowdowns, picketing or boycotts; or difficulties beyond Haworth's reasonable control in obtaining necessary raw materials, labor, fuels and electric power, components or facilities, and any other circumstances beyond the control of the party affected.

### 3. Delays by Customer

Where Haworth has not received adequate site dimensions, Product specifications, shipping information, installation particulars or other information required by Haworth to permit the efficient manufacture of any Products, or where site conditions are not in accordance with the Installation Requirements set forth, or are not otherwise suitable to permit effective and efficient installation, the manufacture and/or delivery of Products may be delayed, and such event shall constitute a delay by the Customer. When manufacture, delivery or installation is delayed by the Customer or at the Customer's request: (i) Haworth may, at its option, present the invoice for the full price of the Products to the Customer as then due and payable; (ii) the Customer shall pay to

Haworth all reasonable storage, handling and other reasonable incidental expenses incurred by Haworth in connection with such delay; and (iii) the Customer shall bear all risk of loss or damage to the Products being held by Haworth for the Customer.

### 4. Use and Installation of Products

Haworth recommends that its products be installed by certified, qualified and approved installers according to Haworth's written installation procedures. The Customer agrees to use Haworth products properly; not to remove or alter safety devices, warnings, or operation instructions placed on products by Haworth, and to instruct employees as to the proper care and use of the products according to printed instructions.

### 5. Warranty

Haworth's standard North American Warranty will apply as appropriate. All product line warranty specifics are available in each catalog or upon request.

## E. Services

Service requests for design, installation, relocation, storage, etc. are handled by the local Haworth dealer on a separately negotiated basis. Contact the local Haworth dealer, affiliate or area sales office for more details.

### Scope of Work - Design

Customer acknowledges that the Products to be manufactured or procured by Haworth in connection with the order are or may be custom manufactured for the Customer and that Haworth may be required to perform extensive work in relation to the design and specification of such Products. Where Customer requests that Haworth create as-built drawings or make more than two material revisions to any particular Product design or specification, Customer agrees that Haworth shall be entitled to invoice Customer with respect to such additional work on the basis of Haworth's then prevailing rates for related design and specification services.

### Installation Requirements

Where installation services are to be provided by Haworth, its authorized dealer or subcontractor, a document will be provided setting forth the scope of installation work to be performed (the "Scope of Work") and the price to be charged therefore. Unless otherwise specified in the scope of work, Haworth's installation services are limited to products sold by Haworth with the exception of lighting, under floor electrical and data.

## General Conditions

(a) Sufficient time shall be allocated by the Customer following delivery of Products and prior to Customer's occupation of the premises to allow the installation of all Products during conventional working hours, Monday through Friday, 7:30 a.m. to 4:30 p.m. Where sufficient time is not allocated and Haworth is required or requested to perform installation work outside of such times, overtime charges shall be charged at Haworth's then prevailing rates. (b) Haworth shall be given free and exclusive access to; (i) a loading dock within 150' of the freight elevator or hoist, which loading dock shall be of sufficient size to enable full-size tractor-trailer deliveries to the premises (where required by Haworth); (ii) a freight elevator or hoist of sufficient size and capacity to allow the efficient movement of the Products; (iii) an unobstructed and safe pathway to the area where Products are to be stored or staged; (iv) a secure storage / staging area; (v) convenient trash facilities; (vi) adequate lighting; (vii) a work site that complies with applicable health and safety legislation. Where such areas and facilities are not available, Haworth shall be entitled to bill Customer for all amounts incurred by Haworth for double-handling, product movement, lifting, hoisting, trash removal and any other resulting charges. (c) The installation site shall be free and clear of existing furniture, debris, or other obstructions (including construction in progress) and shall otherwise be in the reasonable opinion of Haworth ready for installation of the Products. Any building where Products are to be installed shall be fully closed in, dry and protected from the natural elements, with temperatures between 40°F and 90°F (4°C and 32°C) and relative humidity not to exceed 70% at all times including receipt of products, during and after installation and shall be adequately heated and/or air-conditioned. Where unusual site conditions exist which impede or prevent the normal installation of any Products, applicable extra charges shall apply at prevailing rates. (d) Haworth's installation pricing is based upon the installation occurring as one continuous delivery and installation project. Phased installation pricing shall be provided by Haworth on a case by case basis. (e) Electrical hardwiring, plumbing and mechanical work is not included and shall be the responsibility of the Customer. (f) Except as may be otherwise specifically indicated, installation pricing does not apply to projects where union labor is required. Where Haworth has provided installation pricing on the basis that non-union labor be utilized, and where Haworth is required to use union labor or it otherwise becomes impractical to use non-union labor, or where Haworth is required by law to use prevailing wages, Haworth shall be entitled to charge the Customer for any cost differential between the anticipated cost of non-union labor and the actual cost of utilizing union or prevailing wage labor. (g) Haworth shall not be responsible for obtaining permits.

## North American Terms of Sale

### Project / Site Conditions

Lateral load bracing is not included in the scope of Haworth's work and shall not be performed by Haworth. In areas where flooring Products are to be installed by Haworth overhead construction must be completed prior to the commencement of such work to avoid damage to the panels and finishes. The existing subfloor must be smooth, mopped clean, free of moisture, dust, dirt and debris. Once installed, the access floor must be maintained in the same manner. The subfloor must have a maximum vertical elevation deviation of 0.375" (10mm) over a horizontal span of 10'-0" (3m), and without discontinuities in floor slope. For greater certainty, the scope of Haworth's installation work in such areas shall not be deemed to include any work required to level such subfloor, remove protrusions, remove pre-existing floor coverings or adhesives, or any other work which is required to remedy any conditions which may impede the efficient installation of flooring. Except as may be otherwise specifically indicated in the order, installation pricing for flooring Products and the Scope of Work in relation thereto shall not include any work required to remove and replace floor panels following their initial installation to provide tradespersons or others with access to the underpanel cable management cavity. In areas where movable walls are to be installed, all flooring (including carpeting) and ceiling components (including dropped ceiling grid components) shall be fully complete and ready for the installation of the movable wall products. Further, the existing floor (or other surface on which the movable wall panels are to be installed) shall have a maximum vertical deviation of 1.25" (30mm) and the dropped ceiling grid shall have a maximum vertical deviation of 0.375" (10mm) from the specifications to which such movable wall panels were designed and manufactured (collectively the "Permitted Tolerances"), and shall otherwise comply with any site condition assumptions made known to Haworth prior to the manufacture of such Products (the "Site Assumptions"). Where the Permitted Tolerances or Site Assumptions are not strictly adhered to or met, additional charges may be incurred in connection with site remediation and/or the modification or remanufacture of affected movable wall products, together with all resulting shipping and labor charges at Haworth's then prevailing rates for such Products and services.

### Installation Change Orders

Where Customer requests work to be performed or materials to be provided which are not contemplated in the Scope of Work, or Customer otherwise requests Products or services not contemplated in the order (collectively "Extras"), prior to providing such Extras Haworth reserves the right to require the Customer to provide and sign a written Purchase Order or Change Order acceptable to Haworth describing the Extras and the amounts to be charged therefore, and the Customer agrees to pay such charges.

### Entire Agreement

The order and this Agreement (including applicable Schedules) constitute the sole agreement between the parties and supercede any prior understanding or written or oral agreements between the parties (excluding National Sales Agreements). No waiver of any of the provisions of these Standard Terms and Conditions shall be binding on Haworth unless expressly agreed in writing.

**Revision Date: June 1, 2015**



# Index

Products are listed alphabetically in this index by alpha-numeric prefix/suffix codes.

<b>Product Code</b>	<b>Product Description</b>	<b>Page</b>
BABD	Accessories – Accessory Rail Mounting Bracket Kit, Double Sided	.23
BABS	Accessories – Accessory Rail Mounting Bracket Kit, Single Sided	.23
BARS	Accessories – Accessory Rail	.23
BUAB	Accessories – Bin	.23
EBEC-0000-F	Accessories – 120° Infeed Cover	.18
EKEP-0000-C	Electrical Components – Hardwire Kit	.30
EKET-C000-2S	Electrical Components – Top Feed	.27
EKET-C000-3S	Electrical Components – Top Feed	.27
EKET-C000-4S	Electrical Components – Top Feed	.27
EKET-C000-CS	Electrical Components – Top Feed — Hardwire	.30
EUAC-0000-A	Electrical Accessories – Base Feed Cover — Vertical	.31
EUAC-0000-F	Electrical Accessories – Base Feed Cover — Vertical	.31
EUAP-0000-CB	Electrical Components – Cover Plates	.30
EUAP-0000-CR	Electrical Components – Cover Plates	.30
EUEB-0000-2HY	Electrical Components – Base Feed Module — Architectural Concealed Hardwire Connection	.24
EUEB-0000-3HY	Electrical Components – Base Feed Module — Architectural Concealed Hardwire Connection	.24
EUEB-0000-4HY	Electrical Components – Base Feed Module — Architectural Concealed Hardwire Connection	.24
EUEC-0000	Accessories – Double-Sided Utility Tray End Covers	.18
EUEH-0087-2	Electrical Components – Infeed Harness	.24
EUEH-0087-3	Electrical Components – Infeed Harness	.24
EUEH-0087-4	Electrical Components – Infeed Harness	.24
EUEJ-0018-3	Electrical Components – Jumper	.25
EUEJ-0024-4	Electrical Components – Jumper	.25
EUEJ-0064-2WF	Electrical Components – Internal Power Base™ AI Base Feed	.25
EUEJ-0064-3WF	Electrical Components – Internal Power Base™ AI Base Feed	.25
EUEJ-0064-4WF	Electrical Components – Internal Power Base™ AI Base Feed	.25
EUEK-2S	Electrical Components – Utility Tray Power Retrofit Kit	.26
EUEK-3S	Electrical Components – Utility Tray Power Retrofit Kit	.26
EUEK-4S	Electrical Components – Utility Tray Power Retrofit Kit	.26
EUER-0015-2M13	Electrical Components – Triplex Receptacles — 15 AMP	.28
EUER-0015-2M13	Electrical Components – Triplex Receptacles — 20 AMP	.29
EUER-0015-2M13U	Electrical Components – 15 Amp Duplex Receptacle with USB Charging Outlet	.28
EUER-0015-3M13U	Electrical Components – 15 Amp Duplex Receptacle with USB Charging Outlet	.28
EUER-0015-3MN3	Electrical Components – Triplex Receptacles — 15 AMP	.28
EUER-0015-4M13	Electrical Components – Triplex Receptacles — 15 AMP	.28
EUER-0015-4M13	Electrical Components – Triplex Receptacles — 20 AMP	.29
EUER-0015-4M13U	Electrical Components – 15 Amp Duplex Receptacle with USB Charging Outlet	.28
EUER-0020-3M13	Electrical Components – Triplex Receptacles — 20 AMP	.29
GCLS-2148	1.5H Credenzas with Drawers – 48" Wide — Laminate Case with Steel Front	.32
GCLS-2148	1.5H Credenzas with Hinged Doors – 48" Wide — Laminate Case with Steel Front	.38
GCLS-2160	1.5H Credenzas with Drawers – 60" Wide — Laminate Case with Steel Front	.34
GCLS-2160	1.5H Credenzas with Hinged Doors – 60" Wide — Laminate Case with Steel Front	.41
GCLS-2172	1.5H Credenzas with Drawers – 72" Wide — Laminate Case with Steel Front	.36
GCLS-2172	1.5H Credenzas with Hinged Doors – 72" Wide — Laminate Case with Steel Front	.45
JBDA-6	X Series Pedestal Accessories – Dividers	.50
JCTB-24	X Series Pedestal Accessories – Pedestal Cushion Kit	.50
JPMA-24	X Series Mobile Pedestals – Box/File — Mobile	.48
JPMP-24	X Series Mobile Pedestals – Pencil/Box/File — Mobile	.48
JPTA-6	X Series Pedestal Accessories – Pencil Tray	.50
SUPC	Screens – Rail Mounted Screen	.20
VBSF-0000	Accessories – Screen Aligner	.18

## Index

<b><u>Product Code</u></b>	<b><u>Product Description</u></b>	<b><u>Page</u></b>
WBCZ-S	Worksurfaces – Corner, 120° Wrap-Around	17
WBDA-SC	Worksurfaces – Rectangular Bench End Worksurface	15
WBRA-SC	Worksurfaces – Rectangular Worksurface	13
WBRA-SS	Worksurfaces – Rectangular Worksurface – For Use with Access Hatches	14
WBRB-SC	Worksurfaces – Rectangular Return Worksurface	16
ZBA2-0000-PNFG	Leg Kits – Bench End Leg Kit	12
ZBA2-0024-HRFG	Leg Kits – Return Leg Kit	12
ZBBP-0000-PN	Accessories – Tie Plate	18
ZBCZ-2442-SAGH	120° Single Sided Starter Kits	9
ZBCZ-2442-SIGH	120° Single Sided Starter Kits	9
ZBCZ-4842-AWGH	120° Double Sided Three Pack Add-on Kit	11
ZBCZ-4842-AXGH	120° Double Sided Three Pack Add-on Kit	11
ZBCZ-4842-AYGH	120° Double Sided Three Pack Add-on Kit	11
ZBCZ-4842-AZGH	120° Double Sided Three Pack Add-on Kit	11
ZBCZ-4842-SAGH	120° Double Sided Three Pack Starter Kit	10
ZBCZ-4842-SIGH	120° Double Sided Three Pack Starter Kit	10
ZBE2-0000-PNFG	Leg Kits – Bench End Leg Kit	12
ZBI2-0030-HNFG	Leg Kits – Return Leg Kit	12
ZBRA-0000-D	Accessories – Access Hatch Gap Filler	22
ZBRA-2448-ASGH	Single Sided Kits – Single Sided Add-On Kit	6
ZBRA-2448-ATGH	Single Sided Kits – Single Sided Add-On Kit	6
ZBRA-2448-SAGH	Single Sided Kits – Single Sided Starter Kit	5
ZBRA-2448-SIGH	Single Sided Kits – Single Sided Starter Kit	5
ZBRA-4848-AFGH	Double Sided Kits – Double Sided Add-On Kit	8
ZBRA-4848-ASGH	Double Sided Kits – Double Sided Add-On Kit	8
ZBRA-4848-ATGH	Double Sided Kits – Double Sided Add-On Kit	8
ZBRA-4848-SAGH	Double Sided Kits – Double Sided Starter Kit	7
ZBRA-4848-SIGH	Double Sided Kits – Double Sided Starter Kit	7

# PRODUCT NON-OBSOLESCENCE AND WARRANTY POLICY

This North American Haworth Product Non-Obsolescence and Warranty Policy (the "policy") applies to products manufactured after May 8, 2015. For products manufactured before this date please refer to the policy published in the NA Price List when purchased or contact your local Authorized Haworth Dealer. All Haworth products are warranted for 24 hour / 7 day use over the length of the Applicable Warranty Period as set forth below.

Haworth, Inc. or Haworth, Ltd., (each called "Haworth") will make a good faith effort to maintain product compatibility within our various generations of integrated product platforms to provide our customers with spaces that adapt to change. Under our non-obsolence policy, we commit to provide our customers with products of comparable function or operational characteristics for a term equal to the Applicable Warranty Period. Haworth fabrics and finishes must be updated periodically to maintain the market appeal of our products and respond to the demands and changing preferences of our customers. As a result, we or the manufacturer may discontinue some fabrics and finishes before expiration of the Applicable Warranty Period.

If a new product purchased or leased from Haworth or from an Authorized Haworth Dealer proves to be defective (as defined below) while the product is still in the possession of the initial purchaser or lessee and if they, within the Applicable Warranty Period, inform Haworth of the defect by contacting the local Authorized Haworth Dealer, then, except as provided below, Haworth will, at Haworth's option, either repair or replace the product, at Haworth's expense, or refund the purchase price of the product. Except as provided below, a product shall be considered "defective" if Haworth finds that it is defective in material or workmanship and if the defect materially impairs the use of the product to the purchaser or lessee. The applicable warranty period begins on the day the product is manufactured. If a product that the purchaser or lessee references in a notice of defect was not installed by a Haworth Certified installer and/or reconfigured by a Haworth-trained installer, then the product may not be considered defective and Haworth will not be obligated to repair or replace it or to refund its price.

## PRODUCTS / APPLICABLE WARRANTY PERIOD

### LIFETIME

All Haworth products are warranted for lifetime *except products, components and materials described below:*

### TWELVE YEARS

All Haworth NA manufactured seating is warranted for 24/7 multiple shift use by persons up to 325 lbs and includes the framework, mechanisms, seating foam, seat & back mesh and seating glides & casters.

All wood or wood framed products.

### TEN YEARS

All wall products (excluding soft close door mechanisms warranted for Two Years), electrical components (excluding Power Base™ AI, USB receptacles and workware products), electrical accessories, fixed task lighting (excluding LED lighting), adjustable keyboard pads, monitor arms and products that are at any time used in a classroom or educational environment (other than administration areas) *except as limited or described below:*

### FIVE YEARS

Fabric scrims and fabrics rated Heavy Duty (A) under the Association of Contract Textiles Guidelines, leather, vertical use markerboard laminates, user-adjustable worksurface mechanisms, gel arm caps, thermofused laminates, slow close mechanisms, LED lighting, Power Base™ receptacles with USB charging outlets, electronic ballasts used in task lighting, horizontal glass or thermoplastic table assemblies and Systems Accessories.

### THREE YEARS

Power Base AI Electrical products, workware™ products, Hoop products (excludes any warranty for surface damage such as scratches, dents or abrasions), plastic ultraviolet light color fastness and fabrics rated General Contract (a) under the Association of Contract Textiles Guidelines.

### ONE TO FIVE YEARS\*

Products that are manufactured outside North America and sold into the North American market.

### ONE YEAR

Horizontal use markerboard laminate, Openest™ Plume Screens, soft palm rest, mouse pad insert and translucent edging.

Haworth "Specials" products that involve simple modification of a standard based product will be warranted for the same period as the standard catalog product it is based on. Haworth "Specials" products that deviate from standard catalog product in the form of features, construction, function, or aesthetic will be warranted for 1 year.

All software is without warranty of any kind, either expressed or implied.

All service parts are warranted for two years or the remaining balance of the assembly's original warranty period, whichever is longer.


\*The Applicable Warranty Period for each such product is specified in Haworth's price list for the product.

A product will not be considered to be defective, and Haworth will not repair, or replace it or refund its price if the product (1) is a consumable product, such as a lamp; (2) is "Customer's Own Material" (i.e. material specified by the purchaser or lessee that is not a standard Haworth product offering, such as Haworth Alliance fabrics); (3) is not installed and used as recommended in Haworth's written specification, installation, care, maintenance and user guides; (4) has been otherwise misused or suffered abusive damage or (5) is a product that is manufactured by a third-party supplier from whom Haworth purchases it for resale without incorporating it into Haworth product (in which case Haworth will assign to the purchaser or lessee any warranty that the manufacturer provides), unless otherwise specified by Haworth in writing. At all times the Covered Product must have been located in a building that is (i) dry, fully closed-in and protected from the natural elements, and (ii) adequately heated, ventilated and air conditioned in order to maintain an internal temperature between 40°F and 90°F (4°C and 32°C) and relative humidity levels between 25% and 55%.

A defect in material or workmanship does not include damage to a product, or failure of a product to operate or perform properly or to maintain appearance, caused by (a) normal wear and tear; (b) an Act of God or transportation; (c) a product alteration made without Haworth's express written authorization; (d) the natural variation of color, grain or texture found in wood and leather; (e) the natural aging found in materials such as wood, fabric and leather which results in colors shifting during use; (f) dye lot variations in fabric, leather or wall covering (g) the natural patina of leather during use; (h) "puddling" of leather or faux leather; or (i) reverse crocking of dyes from clothing onto our seating materials.

EXCEPT AS STATED ABOVE, HAWORTH DOES NOT MAKE A WARRANTY AS TO ANY PRODUCT AND, IN PARTICULAR, DOES NOT MAKE A WARRANTY OF MERCHANTABILITY OR OF FITNESS FOR A PARTICULAR PURPOSE. Product repair or replacement or refund of the price, at Haworth's option, in accordance with this Policy, is the purchaser's or lessee's exclusive remedy for a product defect. Haworth shall not have tort liability with respect to a product, and Haworth shall not be liable for any consequential, economic, indirect, special, punitive or incidental damages arising from a product defect. Haworth shall not be liable for repair or product placement due to improper installation or any defect in materials used for installation which are not manufactured, sold or supplied by Haworth.

Released May 8, 2015



**HAWORTH®**

For more information call 800.344.2600 or 616.393.3000.

Haworth is a registered trademark of Haworth, Inc.  
©Haworth, Inc. 2018 4.18 Item #5942

[haworth.com](http://haworth.com) | [haworth-europe.com](http://haworth-europe.com) | [haworth-asia.com](http://haworth-asia.com)