



(ENGLISH)

APPLICATION: 1. Strip floors to remove old waxes, sealers and finishes. 2. Rinse thoroughly and let dry. 3. With clean equipment apply thin, even coats of finish. 4. Under normal conditions, allow to dry for 30 minutes between coats. 5. For best results, apply a maximum of 4 coats in 24 hours.

NOTE: For stripping and maintaining asbestos containing tile, follow OSHA or EPA guidelines.

COVERAGE: One gallon covers up to 3,000 square feet.

MAINTENANCE: 1. **Daily:** Sweep or dust mop as necessary to remove gritty soil. 2. **Dirty Floors:** Clean with 2-4 oz. of neutral floor cleaner per gallon of water. Rinse and let dry. 3. **Traffic Area:** Clean with 2-4 oz. of neutral floor cleaner per gallon of water. Rinse and let dry. Apply additional thin coats of floor finish to traffic lanes as needed. 4. **Buffing:** If desired, periodic burnishing with blended hair pads will enhance appearance. 5. **Periodic Complete Maintenance:** Ordinarily, stripping is not required more than (1) or (2) times per year. Use up to 32 oz. of our stripper per gallon of water.

Read label before use. Keep out of the reach of children. If medical advice is needed, have product container or label at hand.

Percentage of the mixture consisting of ingredient(s) of unknown toxicity: 18.7%.

There is no toxicity data available for the polymer in this product, which is exempt and categorized in a low-concern functional group under the EPA's Toxic Substance Control Act (TSCA).

This finish meets ASTM D2047 method for slip resistance.

Maximum VOC Content: 2%

NOT FOR USE IN THE STATE OF CALIFORNIA

See Product Safety Data Sheet Before Using.

For Commercial, Industrial and Institutional Use Only.

Contents: Water 7732-18-5, Acrylic Polymer N.A., 2-(2-ethoxyethoxy) ethanol 111-90-0, (2-methoxymethylethoxy) propanol 34590-94-8; Tributaxyethyl Phosphate 78-51-3, 21400721

Net Contents: 5 Gallons (18.9 Liters)

(FRANÇAIS)

APPLICATION: 1. Décapez les planchers pour enlever les vieilles cires, les produits d'étanchéité et les finis. 2. Rincez à fond et laissez sécher. 3. Appliquez, avec un équipement propre, des couches fines et régulières de fini. 4. Dans les conditions normales, laissez sécher pendant 30 minutes entre chaque couche. 5. Pour obtenir les meilleurs résultats, appliquez un maximum de 4 couches en 24 heures.

SURFACE COUVERTE: 1 litre couvre 75 m².

ENTRETIEN: 1. **Journalier:** Balayez ou époussetez si nécessaire pour enlever la saleté qui risque de rayer les surfaces. 2. **Planchers Sales:** Nettoyez avec de 16-32 ml de nettoyant neutre pour plancher par litre d'eau. Rincez et laissez sécher. 3. **Surface à Grand Trafic:** Nettoyez avec de 16-32 ml de nettoyant neutre pour plancher par litre d'eau. Rincez et laissez sécher. Appliquez de fines couches supplémentaires de fini pour plancher sur les surfaces à grand trafic selon les besoins. 4. **Polissage:** Si désiré, un polissage périodique avec des patins à brosse augmentera la beauté de vos sols. 5. **Entretien Complet Périodique:** Habituellement, il n'est pas nécessaire de décapier plus de (1) ou (2) fois par an. Utilisez jusqu'à 256 ml de notre produit décapant par litre d'eau chaude.

Lire l'étiquette avant utilisation. Tenir hors de portée des enfants. En cas de consultation d'un médecin, garder à disposition le récipient ou l'étiquette.

Pourcentage du mélange constitué de composants de toxicité inconnue: 18.7%.

Il n'existe pas de données disponibles sur la toxicité pour le polymère dans ce produit, qui est exempté et classé dans un groupe à faible préoccupation fonctionnelle vertu de la Loi sur le contrôle des substances toxiques de l'EPA (TSCA).

Lire la Fiche de Sécurité Avant d'Utiliser.

Pour Usage Commercial, Industriel ou Institutionnel Seulement.

Contenu Net: 18.9 Litres

(ESPAÑOL)

APLICACIÓN: 1. Remueva todos los selladores, ceras y acabados antiguos de los pisos. 2. Enjuague completamente y deje secar. 3. Aplicar manos ligeras y uniformes de acabado con el equipo limpio. 4. Bajo condiciones normales, deje que se seque por treinta 30 minutos antes de dar manos siguientes. 5. Para los mejores resultados, aplicar un máximo de cuatro 4 manos durante un período de veinticuatro 24 horas.

CUBRIRÁ: 1 litro cubre hasta 75 m².

MANTENIMIENTO: 1. **Diariamente:** Barra o trapee en seco como sea necesario para remover mugre arenosa. 2. **Pisos Sucios:** Limpie con 16-32 ml del limpiador de pisos neutro por litro de agua. Enjuague y deje secar. 3. **Area de Trafico:** Limpie con 16-32 ml del limpiador de pisos neutro por litro de agua. Enjuague y deje secar. Aplique capas delgadas adicionales del acabado de pisos a las áreas de tráfico como sea necesario. 4. **Pulido:** Si desea, el pulir periódicamente con borras de pelo resultará la apariencia. 5. **Mantenimiento Periodico Completo:** Ordinariamente, no se requiere de remover el acabado mas de (1) o (2) veces al año. Use hasta 256 ml de nuestro removedor de acabados por litro de agua tibia.

Leer la etiqueta antes del uso. Mantener fuera del alcance de los niños. Si se necesita consultar a un médico, tener a mano el recipiente o la etiqueta del producto.

Porcentaje de la mezcla consistente de ingrediente(s) de toxicidad desconocida: 18.7%. No hay datos de toxicidad disponibles para el polímero en este producto, que se exime y se clasifica como un grupo funcional de bajo interés bajo la Ley de Control de Sustancias Tóxicas de la EPA (TSCA).

Consulte la Hoja de Datos de Seguridad Antes de Usar este Producto.


Solamente Para Uso Comercial, Industrial e Institucional.

Contenido Netos:
18.9 Litros



**Wheeler's Janitorial
Supplies & Equipment**
809 North Jackson Street
Crystal Springs, MS 39059

Phone: 601-892-7547 Fax: 601-892-0685
Email: wheelersjanitorial@yahoo.com
www.wheelersjanitorial.com



Scan QR code for access to the Safety Data Sheet.

Scannez le code QR pour accéder à la Fiche de Données de Sécurité.

Escanee el código QR para acceder a la Hoja de Datos de Seguridad.



TOM-PAYNE

(ENGLISH)

TOM-PAYNE is an extreme performance floor coating that combines deep gloss, high durability and ease-of-use into one product. High molecular weight acrylic polymers and dense cross-linking produce a beautiful, long lasting shine that resists black marking and scuffing. TOM-PAYNE is ideal for limited maintenance settings such as classrooms, patient rooms, and offices. It also responds to occasional burnishing — making it suitable for retail establishments, hallways and other frequently maintained areas.

APPLICATION: 1. Strip floors to remove old waxes, sealers and finishes. 2. Rinse thoroughly and let dry. 3. With clean equipment apply thin, even coats of finish. 4. Under normal conditions, allow to dry for 30 minutes between coats. 5. For best results, apply a maximum of 4 coats in 24 hours.

NOTE: For stripping and maintaining asbestos containing tile, follow OSHA or EPA guidelines.

COVERAGE: One gallon covers up to 3,000 square feet.

MAINTENANCE: 1. **Daily:** Sweep or dust mop as necessary to remove gritty soil. 2. **Dirty Floors:** Clean with 2-4 oz. of neutral floor cleaner per gallon of water. Rinse and let dry. 3. **Traffic Area:** Clean with 2-4 oz. of neutral floor cleaner per gallon of water. Rinse and let dry. Apply additional thin coats of floor finish to traffic lanes as needed. 4. **Buffing:** If desired, periodic burnishing with blended hair pads will enhance appearance. 5. **Periodic Complete Maintenance:** Ordinarily, stripping is not required more than (1) or (2) times per year. Use up to 32 oz. of our stripper per gallon of water.

Read label before use. Keep out of the reach of children. If medical advice is needed, have product container or label at hand.

Percentage of the mixture consisting of ingredient(s) of unknown toxicity: 8.1%. There is no toxicity data available for the polymer in this product, which is exempt and categorized in a low-concern functional group under the EPA's Toxic Substance Control Act (TSCA).

This finish meets ASTM D2047 method for slip resistance.

Maximum VOC Content: 3.6%

NOT FOR USE IN THE STATE OF CALIFORNIA

See Product Safety Data Sheet Before Using.


For Commercial, Industrial and Institutional Use Only.



WARNING: Reproductive Harm - www.P65Warnings.ca.gov.

Contents: Water 7732-18-5, Diethylene glycol monoethyl ether 111-90-0, Dipropylene glycol monomethyl ether 34590-94-8, Tributylphosphite 78-51-3, Acrylic emulsion polymer N/A. 265D0721

Net Contents: 5 Gallons (18.9 Liters)



(FRANÇAIS)

TOM-PAYNE est un enduit pour sols ultra performant qui réunit en un seul produit le lustre profond, la grande durabilité et la facilité d'application. Les polymères acryliques à poids moléculaire élevé et l'imbrication dense produisent ensemble un beau brillant durable qui résiste aux taches noires et aux éraflures. TOM-PAYNE est idéal pour les endroits à entretien limité comme les salles de classe, les chambres de malades et les bureaux. Il répond aussi au polissage à intervalles espacés - ce qui le rend très utile pour les commerces, vestibules et autres endroits qui demandent un entretien fréquent.

APPLICATION: 1. Décapez les planchers pour enlever les vieilles cires, les produits d'étanchéité et les finis. 2. Rincez à fond et laissez sécher. 3. Appliquez, avec un équipement propre, des couches fines et régulières de fini. 4. Dans les conditions normales, laissez sécher pendant 30 minutes entre chaque couche. 5. Pour obtenir les meilleurs résultats, appliquez un maximum de 4 couches en 24 heures.

SURFACE COUVERTE: 1 litre couvre 75 m².

ENTRETIEN: 1. **Journalier:** Balayez ou époussetez si nécessaire pour enlever la saleté qui risque de rayer les surfaces. 2. **Planchers Sales:** Nettoyez avec de 16-32 ml de nettoyant neutre pour plancher par litre d'eau. Rincez et laissez sécher. 3. **Surface à Grand Trafic:** Nettoyez avec de 16-32 ml de nettoyant neutre pour plancher par litre d'eau. Rincez et laissez sécher. Appliquez de fines couches supplémentaires de fini pour plancher sur les surfaces à grand trafic selon les besoins. 4. **Polissage:** Si désiré, un polissage périodique avec des patins à brosse augmentera la beauté de vos sols. 5. **Entretien Complet Périodique:** Habituellement, il n'est pas nécessaire de décapier plus de (1) ou (2) fois par an. Utilisez jusqu'à 256 ml de notre produit décapant par litre d'eau chaude.

Lire l'étiquette avant utilisation. Tenir hors de portée des enfants. En cas de consultation d'un médecin, garder à disposition le récipient ou l'étiquette.

Pourcentage du mélange constitué de composants de toxicité inconnue: 8.1%. Il n'existe pas de données disponibles sur la toxicité pour le polymère dans ce produit, qui est exempté et classé dans un groupe à faible préoccupation fonctionnelle vertu de la Loi sur le contrôle des substances toxiques de l'EPA (TSCA).



ATTENTION: Troubles de l'appareil reproducteur - www.P65Warnings.ca.gov.

Lire la Fiche de Sécurité Avant d'Utiliser.
Pour Usage Commercial, Industriel ou Institutionnel Seulement.

Contenu Net: 18.9 Litres

(ESPAÑOL)

TOM-PAYNE es un recubrimiento para pisos de excelentes resultados que combina brillo profundo, alta durabilidad y facilidad de uso en un solo producto. Los polímeros acrílicos de peso molecular alto y enlace cruzado denso producen un brillo duradero y hermoso que resiste las marcas negras y el rayado. TOM-PAYNE es ideal para lugares de mantenimiento limitado como salones de clase, cuartos de hospital y oficinas. También responde al pulido ocasional — haciéndolo una buena opción para establecimientos de ventas, pasillos y otras áreas que se mantienen frecuentemente.

APLICACIÓN: 1. Remueva todos los selladores, ceras y acabados antiguos de los pisos. 2. Enjuague completamente y deje secar. 3. Aplicar manos ligeras y uniformes de acabado con el equipo limpio. 4. Bajo condiciones normales, deje que se seque por treinta 30 minutos antes de dar manos siguientes. 5. Para los mejores resultados, aplicar un máximo de cuatro 4 manos durante un periodo de veinticuatro 24 horas.

CUBRIRÁ: 1 litro cubre hasta 75 m².

MANTENIMIENTO: 1. **Diariamente:** Barra o trapee en seco como sea necesario para remover mugre arenosa. 2. **Pisos Sucios:** Limpie con 16-32 ml del limpiador de pisos neutro por litro de agua. Enjuague y deje secar. 3. **Area de Trafico:** Limpie con 16-32 ml del limpiador de pisos neutro por litro de agua. Enjuague y deje secar. Aplique capas delgadas adicionales del acabado de pisos a las áreas de tráfico como sea necesario. 4. **Pulido:** Si desea, el pulir periódicamente con borras de pelo resaltará la apariencia. 5. **Mantenimiento Periódico Completo:** Ordinariamente, no se requiere de remover el acabado mas de (1) o (2) veces al año. Use hasta 256 ml de nuestro removedor de acabados por litro de agua tibia.

Leer la etiqueta antes del uso. Mantener fuera del alcance de los niños. Si se necesita consultar a un médico, tener a mano el recipiente o la etiqueta del producto.

Porcentaje de la mezcla consistente de ingrediente(s) de toxicidad desconocida: 8.1%. No hay datos de toxicidad disponibles para el polímero en este producto, que se exime y se clasifica como un grupo funcional de bajo interés bajo la Ley de Control de Sustancias Tóxicas de la EPA (TSCA).



ADVERTENCIA: Daño Reproductivo - www.P65Warnings.ca.gov.

Consulte la Hoja de Datos de Seguridad Antes de Usar este Producto.
Solamente Para Uso Comercial, Industrial e Institucional.

Contenido Netos: 18.9 Litros



**Wheeler's Janitorial
Supplies & Equipment**

809 North Jackson Street
Crystal Springs, MS 39059

Phone: 601-892-7547 Fax: 601-892-0685
Email: wheelersjanitorial@yahoo.com
www.wheelersjanitorial.com

Scan QR code for access to the Safety Data Sheet.
Scannez le code QR pour accéder à la Fiche de Données de Sécurité.
Escanee el código QR para acceder a la Hoja de Datos de Seguridad.





www.essind.com

Storm

CATEGORY 5:
Heavy-Duty, No-Rinse Cleaner

Nettoyant Industriel Sans Rincege
Limpiador Sin Enjuague Para Trabajos Fuertes

 1043FC

 ESSENTIAL[®] INDUSTRIES

1 GALLON
3.8 LITERS

(ENGLISH)
For complete maintenance of all washable surfaces. A chemically balanced detergent containing nonionic surfactant, emulsifier, and sequestering agent for finest all around cleaning. Follow the recommended dilutions below. Smaller amounts can be used for light duty cleaning. Directions are based on adverse conditions.

DIRECTIONS

For use on all linoleum, rubber, asphalt, synthetic, vinyl, granite, terrazzo, hard tile, concrete, sealed wood and any washable surface. Do not use on marble.

- General Cleaning: 2 ounces per gallon (16 ml per liter)
- Auto Washers: 2 ounces per gallon (16 ml per liter)
- Auto Scrubbers: 2 ounces per gallon (16 ml per liter)
- Deep Mopping: 1 ounce per gallon (8 ml per liter)
- Deep Scrub Prior to Resurfacing: 8 ounces per gallon (64 ml per liter)
- Ice Melt Residue Neutralizer: 2 ounces per gallon (16 ml per liter)
- After Ship Neutralizer: 2 ounces per gallon (16 ml per liter)
- Rinse After Deep Scrub or Rubber/Wood Prep: 2 ounces per gallon (16 ml per liter)

NOTE: For stripping and maintaining cabinets containing tile, follow OSHA or EPA guidelines.
Read label before use. Keep out of reach of children. If medical advice is needed, have product container or label at hand.

 **Floor Coating and Finishing Material.**
As to Slip Resistance Only 1/75
See Product Safety Data Sheet Before Using.
For Commercial, Institutional and Institutional Use Only.

Ingredients: Water (7732-18-5), Tetrasodium ethylenediamine tetracetate (64-02-8), Sodium xylene sulfonate (1300-72-7).
For more ingredient information, visit: <https://www.essind.com/ingredient-disclosure>
Net Contents: One Gallon (3.8 Liters)

(FRANCAIS)
Pour un entretien complet de toutes les surfaces lavables. Un détergent équilibré chimiquement, contenant un surfactant non-ionique, un émulsifiant et un complexant pour le nettoyage le plus fin. Suivre les dilutions recommandées ci-après. On peut utiliser de dilutions moindres pour les nettoyages légers. Les instructions sont basées sur des conditions difficiles.

MODE D'EMPLOI

A utiliser sur les linéolium, les caoutchoucs, l'asphalte, les produits synthétiques, les vitrines, le granit, la terre cuite, la ciment, les dalles élastiques et tous autres lavables. Ne pas utiliser sur le marbre.

- Nettoyage Général: 16 ml par litre
- The Grande Soléris: 16 ml par litre
- Machines à Laver les Surfaces: 16 ml par litre
- Longue Humide Avec un Balai-Laveur: 8 ml par litre
- Nettoyage ou Profondeur Avant l'Application d'une Nouvelle Couche: 64 ml par litre
- Neutralisant Dissolvant Résidu: 16 ml par litre
- Neutralisant Dissolvant Résidu: 16 ml par litre
- Rincer Après Nettoyage ou Profondeur ou Préparation en Coordonnée/Bois: 16 ml par litre

Lire l'étiquette avant utilisation. Tenir hors de portée des enfants. En cas de consultation d'un médecin, garder à disposition la récipient ou l'étiquette.

Lire le Fiche de Sécurité Avant d'Utiliser.
Pour Usage Commercial, Institutionnel ou Institutionnel Seule.

Contenu Net: 3.8 Litres

Essential Industries, Inc.
P.O. Box 12 • Menomonee, Wisconsin 53054-0012 USA
(800) 351-9499 / (262) 336-1122 • www.essind.com
For more information, visit: <https://www.essind.com/ingredient-disclosure>
Net Contents: One Gallon (3.8 Liters)

(ESPAÑOL)
Es para el mantenimiento completo de toda superficie lavable. Este producto contiene agentes tensioactivos no-iónicos, emulsificantes, y agentes sequestradores para la más fina limpieza general. Sigue las diluciones dadas a continuación. Cantidades más pequeñas pueden ser usadas para tareas regulares. Las instrucciones están basadas en condiciones adversas.

INSTRUCCIONES

Para uso en pisos de linóleo, goma, asfalto, sintéticos, vidrio, granito, terrazo, concreto, madera sellada y toda superficie lavable. No se usa en mármol.

- Limpieza General: 16 ml por litro
- Enjuagado de Máquinas: 16 ml por litro
- Máquina Para Fregar: 16 ml por litro
- Para Trapeado Humedo: 8 ml por litro
- Limpieza Profunda Antes de Re-Abrillar: 64 ml por litro
- Neutralizando el Residuo de Frotado del Frotado: 16 ml por litro
- Neutralizando Después de la Remoción: 16 ml por litro
- Enjuague Después de la Limpieza Profunda o Preparación de Madera/Cuero: 16 ml por litro

Ler la etiqueta antes del uso. Mantener fuera del alcance de los niños. Si se necesita consultar a un médico: tener a la mano el recipiente o la etiqueta del producto.

Consulte la Hoja de Datos de Seguridad Antes de Usar este Producto.
Solamente Para Uso Comercial, Institucional o Institucional.

Contenido Neto: 3.8 Litros



Scan QR code to go to www.essind.com/ingredient-disclosure
To learn more about our products, visit www.essind.com/ingredient-disclosure
Escanea el código QR en cualquier momento para obtener más información sobre nuestros productos. Visite www.essind.com/ingredient-disclosure
Escanea el código QR a cualquier momento para obtener más información sobre nuestros productos. Visite www.essind.com/ingredient-disclosure

[illegible]

Pantheon Concrete Sealer - Durable Sealer for Interior Concrete Floors

ENGLISH

REPAIRATION

Interior people, vehicles, property, plants and all surfaces not set to receive Pantheon Concrete Sealer from product, splash at wind drift. Use polyethylene or other protective material.

Pantheon Concrete Sealer may be applied to existing, cured concrete of any age. Surfaces must be clean and structurally sound. Remove all foreign materials including bond breakers, curing agents, surface grease and oil, and construction debris using the appropriate surface prep cleaner.

Allow cleaning with thorough water rinsing.

Neutralize and rinse acid-stained concrete before applying. Application may begin as soon as prepared surfaces are dry.

Price and Air Temperatures: For application should be 50-100°F (10-38°C).

Equipment: Apply with a pour can and a microfiber mop.

OTE: For stripping and maintaining asbestos containing tile, follow OSHA or EPA guidelines.

APPLICATION

Before use, read "Preparation."

LWAYS TEST each surface for suitability and results before overall application. Use the following application instructions at surface dry thoroughly before inspection.

Dilution & Mixing: Apply as packaged. Do not dilute or alter, or use other than as specified. Mix well before use.

Typical Coverage Rates: Variations in surface texture, concrete quality, porosity, job-site conditions, temperature and relative humidity affect coverage and drying. The following figures are for estimating only.

Estimated Coverage Rates

10-20 square feet per gallon

400-800 square feet per gallon

Calculating Project-Specific Target Coverage Rate

1. Prepare a clean, dry and absorbent test area.

2. Place one gallon of Pantheon into a clean pour can. Use the following Application Instructions. Repeat as needed for the desired finish.

3. Measure the test area and the amount of Pantheon Concrete Sealer applied to get the Target Coverage Rate per gallon.

Protect the completed test area from moisture for at least 4 hours.

Application Instructions

The product may be applied to broomed, steel troweled, honed, polished or highly polished interior concrete surfaces.

1. Lightly wet a clean microfiber pad with Pantheon Concrete Sealer, leaving the pad damp.

2. Using a pour can, Pantheon Concrete Sealer can be applied to surface in a bead and spread with a flat mop. Work from one control joint to another.

3. Spread with the damp microfiber pad. Maintain a thin, even coating and wet edge. Stop spreading once drying begins. Do not overlap.

4. Allow to dry tack free, typically 20-40 minutes.

5. Repeat steps 1-4, two coats are recommended for maximum protection.

6. Protect from water for 4 hours. At 72°F (22°C) and 40% relative humidity, product dry times are:

• To Touch: 30-60 minutes

• Light Foot Traffic: 4 hours

• Normal traffic: overnight

The product gains its full stain repellency properties in 7 days.

Cleanups: Before the product dries, clean tools and equipment with fresh water.

Read label before use. Keep out of reach of children. If medical advice is needed, have product container or label at hand.

Sealer Floor Coating and Finishing Material.

As to Slip Resistance Only, 1775

NOTE: DO NOT FREEZE

Maximum VOC Content: < 1%

See Product Safety Data Sheet Before Using.

For Commercial, Industrial and Institutional Use Only.

Ingredients: Water (7722-18-5), Acrylic polymer (Withheld), Glycol Ether (Withheld), Nonionic Surfactant (Withheld), Sil-

icone Defoamer Emulsion (Withheld).

For more ingredient information, visit: <https://www.essind.com/ingredient-disclosure>

Net Contents: 5 Gallons (18.9 Liters)

Essential Industries, Inc.

P.O. Box 12 • Merton, Wisconsin 53056-0012 USA

(800) 551-9679 • (262) 538-1122 • www.essind.com

The sale of our products is expressly conditioned upon, and subject to, our

standard Terms of Sale, which can be found at www.essind.com/terms-of-sale.

273CFH121

(ESPAÑOL)

PREPARACIÓN

Proteja a las personas, los vehículos, las propiedades, las plantas y todas las superficies que no estén preparadas para recibir Pantheon Concrete Sealer del producto, las salpicaduras y el viento. Utilice polietileno u otro material de protección.

Pantheon Concrete Sealer se puede aplicar al concreto curado existente de cualquier antigüedad. Las superficies deben estar limpias y estructuralmente firmes. Retire todos los materiales extraños, incluida la adhesión, los agentes de curado, la grasa y el aceite de la superficie, y los desechos de la construcción con el limpiador de preparación de superficie apropiado.

Rinicez a grande eau après avoir nettoyé.

Neutralisez et rincez le béton taché d'acide avant d'appliquer. Vous pouvez commencer l'application aussitôt que les surfaces préparées sont sèches.

Températures de la surface et de l'air: L'application devrait se faire à des températures entre 10 et 38°C (50-100°F).

Équipement: Appliquer avec un récipient pour verser et une vadrouille en microfibre.

APPLICATION

Avant d'utiliser, lisez la section "Préparation".

NEVEZ TOUJOURS la surface à l'ESSAI avant l'application et aux résultats avant d'appliquer à toute la surface.

Exécutez les instructions d'application qui suivent. Laissez la surface sécher complètement avant de l'inspecter.

Dilution et Mixage: Appliquez tel qu'emballé. Ne pas diluer ou modifier ou utiliser autrement que selon les spécifications. Bien mélanger avant l'utilisation.

Taux de Couverture Typiques: La couverture et le séchage sont fonction de la texture de la surface, de la qualité du béton, de la porosité, des conditions sur le chantier, de la température et de l'humidité relative. Les chiffres qui suivent sont des estimations seulement.

Taux de Couverture Estimés

• 10-20 mètres carrés par Litre

• 400-800 pieds carrés par Gallon

Calcul du Taux de Couverture Cible Spécifique du Projet

1. Préparez une zone propre, sèche et absorbante à mettre à l'essai.

2. Placez un gallon de "Pantheon" dans un récipient propre pour verser. Exécutez les instructions d'application qui suivent. Répétez au besoin pour la finition désirée.

3. Mesurez la zone d'essai et la quantité de Pantheon Concrete Sealer appliquée pour obtenir le taux de couverture cible par litre/gallon. Protégez la zone une fois l'essai terminé contre l'humidité pendant au moins quatre heures.

Instructions d'application

Le produit peut être appliqué sur des surfaces en béton intérieures balayées, polies à la truelle, rectifiées, polies ou hautement polies.

1. Humectez légèrement un tampon en microfibre de Pantheon Concrete Sealer, laissant le tampon humide.

2. À l'aide d'un verseuse, Pantheon Concrete Sealer peut être appliqué sur la surface sous forme de cordon et étalé avec une vadrouille plate. Pressez d'un joint de contrôle à l'autre.

3. Étendez avec le tampon en microfibre humide. Maintenez une couche mince et égale et un bord humide. Cessez d'étendre une fois le séchage amorcé. Ne pas faire chevaucher.

4. Laissez sécher hors poisse, en règle générale, de 20 à 40 minutes.

5. Répétez les étapes 1 à 4. Nous recommandons deux couches pour une protection maximale.

Protégez contre l'eau pendant quatre heures. À 22°C (72°F) et à 40 % d'humidité relative, les temps de séchage sont:

• Toucher : 30-60 minutes

• Gradation piétonne légère : 4 heures

• Gradation piétonne normale : du jour au lendemain

Le produit acquiert toutes ses propriétés anti-taches en 7 jours.

Nettoyage: avant que le produit sèche, nettoyez les outils et l'équipement avec de l'eau fraîche.

Lire l'étiquette avant utilisation. Tenez hors de portée des enfants. En cas de consultation

d'un médecin, garder à disposition le récipient ou l'étiquette.

REMARQUE: NE PAS LAISSER SECHER

Contenu VOC Maximum: < 1%

Lire la Fiche de Sécurité Avant d'Utiliser.

Pour Usage Commercial, Industriel ou Institutionnel Seulement.

Contenu Net: 18.9 Litres

(FRANCAIS)

PREPARACIÓN

Proteja a las personas, los vehículos, las propiedades, las plantas y todas las superficies que no estén preparadas para recibir Pantheon Concrete Sealer del producto, las salpicaduras y el viento. Utilice polietileno u otro material de protección.

Pantheon Concrete Sealer se puede aplicar al concreto curado existente de cualquier antigüedad. Las superficies deben estar limpias y estructuralmente firmes. Retire todos los materiales extraños, incluida la adhesión, los agentes de curado, la grasa y el aceite de la superficie, y los desechos de la construcción con el limpiador de preparación de superficie apropiado.

Rinicez a grande eau après avoir nettoyé.

Neutralisez et rincez le béton taché d'acide avant d'appliquer. Vous pouvez commencer l'application aussitôt que les surfaces préparées sont sèches.

Températures de la surface et de l'air: Pour l'application, il doit y avoir de 10-38°C (50-100°F).

Équipement: Appliquez avec un récipient pour verser et une vadrouille en microfibre.

APPLICATION

Avant d'utiliser, lisez la section "Préparation".

NEVEZ TOUJOURS la surface à l'ESSAI avant l'application et aux résultats avant d'appliquer à toute la surface.

Exécutez les instructions d'application. Laissez la surface sécher complètement avant de l'inspecter.

Dilution et Mixage: Appliquez tel qu'emballé. Ne pas diluer ou modifier ou utiliser autrement que selon les spécifications. Bien mélanger avant l'utilisation.

Taux de Couverture Typiques: Les variations en la texture de la surface, la qualité du béton, la porosité, les conditions du lieu de travail, la température et la humidité relative affectent la couverture et le séchage. Les chiffres qui suivent sont des estimations seulement.

Taux de Couverture Estimés

• 10-20 mètres carrés par Litre

• 400-800 pieds carrés par Gallon

Calcul de la Taux de Couverture Cible Spécifique du Projet

1. Préparez une zone propre, sèche et absorbante à mettre à l'essai.

2. Placez un gallon de "Pantheon" dans un récipient propre pour verser. Exécutez les instructions d'application qui suivent. Répétez au besoin pour la finition désirée.

3. Mesurez la zone d'essai et la quantité de Pantheon Concrete Sealer appliquée pour obtenir la Taux de Couverture Cible par litre/gallon. Protégez la zone une fois l'essai terminé contre l'humidité pendant au moins 4 heures.

Instructions de Application

Le produit se peut appliquer à des surfaces de béton barrières, acabadas con llano de acero, afiladas, pulidas o muy pulidas.

1. Moje ligeramente una almohadilla de microfibras limpia con Pantheon Concrete Sealer, dejando la almohadilla húmeda.

2. Utilizando una lata de vertido, vierta Pantheon Concrete Sealer en forma de línea y extendida con un trapeador plano.

3. Trabaje desde una sección a otra.

4. Extienda con la almohadilla de microfibras húmeda. Mantenga un revestimiento delgado y uniforme y un borde húmedo.

5. Deje de extender una vez que comience el secado. No lo superponga.

6. Deje que se seque sin adherencias, generalmente de 20 a 40 minutos.

7. Repita los pasos 1 a 4. Se recomiendan dos capas para una protección máxima.

Proteja el agua por 4 horas. A 72°F (22°C) y 40% de humedad relativa, los tiempos de secado del producto son: Al tacto:

30 a 60 minutos - Tráfico de personas ligero: 4 horas - Tráfico normal: durante la noche

El producto obtiene sus propiedades completas de repelencia a las manchas en 7 días.

Limpieza: antes de que el producto se seque, limpie las herramientas y el equipo con agua dulce.

Leer la etiqueta antes del uso. Mantener fuera del alcance de los niños. Si se necesita consultar a un médico, tener a mano

el recipiente o la etiqueta del producto.

NOTA: NO SE CONGEE

Maximum VOC Content: < 1%

Consulte la Hoja de Datos de Seguridad Antes de Usar este Producto.

Solamente Para Uso Comercial, Industrial e Institucional.

Contenido Neto: 18.9 Litros



Scan QR code or go to www.essind.com for access to product information and Safety Data Sheet.

Scanner le code QR ou consultez www.essind.com pour accéder à

l'information sur le produit et la Fiche de Données de Sécurité.

Escanee el código QR o visite www.essind.com para acceder a la

información del producto y la Hoja de Datos de Seguridad.

Scan QR code or go to www.essind.com for access to product information and Safety Data Sheet.

Scanner le code QR ou consultez www.essind.com pour accéder à

l'information sur le produit et la Fiche de Données de Sécurité.

Escanee el código QR o visite www.essind.com para acceder a la

información del producto y la Hoja de Datos de Seguridad.

Sport Kote®

(ENGLISH)

DIRECTIONS

READ ALL DIRECTIONS BEFORE APPLYING.

(Failure to follow instructions will nullify this product's warranty)

- Prepare Floor:** This finish is not designed for application to bare wood floors. Use only on previously sanded surfaces. Use only after proper training. **Scrub and Recoat:** Dust mop floor and remove all clogging gum and labels. Prepare floor with Sport Prep Ultra™. Cleaner and Restorer (426SF) following Sport Prep Ultra product label directions. **NOTE:** Test previously coated floor in an inconspicuous area before recoating to determine compatibility with existing finish. Apply no more than 2 coats in 24 hours and a maximum of 3 coats in 48 hours. See finish application instructions below.

- Apply Finish:** Stir gently before using. Apply at a rate of 800-1000 square feet per gallon (20-25 m² per liter). Use a weighted 1-bar with a clean, synthetic pad. Apply thin, even coats with the grain of the wood while walking at a slow, even pace. Walking too fast may produce excessive bubbling in the finish. Allow a dry time of at least 1 hour between coats. Humid conditions require longer dry time. After the first coat has dried, apply a second coat. It may be necessary to screen the first coat if grain raising has occurred or it has dried longer than 4 hours. If so, screen the floor with a previously used 120 grit screen or maroon pad. Always vacuum and tack thoroughly after screening.

NOTE: Check expiration date. Contact Essential for batch re-certification if expiration date is exceeded. Do not pour unused finish back into original container.

- Maintain Daily:** Dust mop at least daily, or more as required, to keep floor dust and dirt free. Dump mop spills, salt residue, etc. with Sport Clean (1143SF) and a thoroughly wrung mop.

- Maintain Weekly:** If soil conditions are heavy, scrub weekly with red pads and a 2 ounce per gallon (16 ml per liter) dilution of Sport Clean (1143SF). Refer to the Wood Floor Care Wall Chart or Manual for further details.

CAUTION: Do not use cleaning compounds other than Essential's Sport Clean (1143SF) as they will reduce product performance and longevity.

- Restoration:** Dust mop floor. Follow restoration directions for Sport Prep Ultra (426SF).

LIMITED WARRANTY: When used according to label instructions, Essential Industries warrants Sport Kote PC to be free from defects in workmanship, material and design. This warranty does not apply to conditions resulting from: (a) improper use of the product; (b) failure to follow directions; and (c) misuse, accident or alteration of the product. Surface preparation, application method and on-site environmental conditions such as air flow, temperature and humidity are beyond our control and do affect the performance of Sport Kote PC. ESSENTIAL MAKES NO OTHER WARRANTIES, INCLUDING BUT NOT LIMITED TO, ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. If the product is deemed by Essential to be defective, your exclusive remedy shall be replacement of the product or refund of the purchase price. Essential Industries is not liable for any loss or damage arising from improper use of Sport Kote PC.

Read label before use. Keep out of the reach of children. If medical advice is needed, have product container or label at hand.

Floor Coating and Finishing Material.
As to Slip Resistance Only. 1775

Maximum VOC Content: 274 g/L

See Product Safety Data Sheet Before Using.

For Commercial, Industrial and Institutional Use Only.

(WARNING: Reproductive Harm - www.P65Warnings.ca.gov)

Ingredients: Water (7732-18-5), Acrylic Polymer (Nihthield), Polyurethane Dispersion (Nihthield), Propylene glycol (57-55-6), 2-butoxyethanol (111-76-2), Tributyltinyl phosphate (78-51-3), Ethylene glycol (107-21-1).

For more ingredient information, visit: <https://www.essind.com/ingredient-disclosure>.

Net Contents: 5 Gallons (18.9 Liters)

Essential Industries, Inc.

P.O. Box 12 - Merion, Wisconsin 53056-0012 USA

(800) 551-9679 • (262) 538-1122 • www.essind.com

The sale of our products is expressly conditioned upon, and subject to, our standard Terms of Sale, which can be found at www.essind.com/terms-of-sale.

1285F0021

PC - Water-Based Urethane Wood Finish

(FRANÇAIS)

INSTRUCTIONS

LEA TODAS LAS INSTRUCCIONES ANTES DE APLICAR

(El no seguir las instrucciones cancela la garantía del producto)

- Preparar el Piso:** Este piso no está diseñado para aplicarse a pisos desnudos. Usar únicamente sobre pisos sellados antes. Use solo después del entrenamiento adecuado. **Fregar y dar Mano Segunda:** Trapear y quitar todos los pedruzcos de chips y etiquetas. Prepare el piso con Limpiador y Restaurador Sport Prep Ultra™ (426SF) siguiendo las instrucciones de la etiqueta.

NOTA: Probar el piso que recibirá mano antes, en lugar que no llama atención, antes de dar nueva mano para asegurarse que el acabado que ya está sobre el piso, conforme a la nueva mano que se planea aplicarse. Aplique no más de 2 capas en 24 horas y un máximo de 3 capas en 48 horas. Ver las instrucciones por aplicar el acabado, abajo.

- Aplicar el Acabado:** Mezclar, desfogar antes de usar. Aplicar, usando un galón para cubrir 800 hasta 1000 pies cuadrados (20-25 m² por litro). Use una barra T presado con una fibra sinéctica limpia. Aplique opus delgados y uniformes con el grano de la madera mientras camina a un paso lento y constante. El caminar demasiado rápido puede producir un exceso de burbujas en el acabado. Dejar que se seque una hora por lo menos, antes de dar manos adicionales. Condiciones de humedad requieren de un mayor tiempo de secado. Después de secarse la primera mano, aplicar una segunda mano. Únicamente se necesita pasar por tamiz la primera mano, si el alzar de los granos ocurrió, o si se ha secado más de 4 horas. En caso que si, pasar por tamiz, con tamiz de 120 granos, o con boma marion, usado antes. Siempre limpiar con aspiradora y lavar completamente, después de pasar por tamiz.

NOTA: Revise la fecha de expiración. Comuníquese a Essential para re-certificar el lote en caso de que la fecha de expiración se haya excedido. No repase el acabado que no se usó al contenedor original.

- Mantener Diariamente:** Trapear por lo menos cada día, o más frecuentemente si se necesita, para mantener el piso libre de polvo y de migra. Limpiar derrames, residuo de sal, etc., usando trapo húmedo, o trapo escurrido completamente, con Sport Clean (1143SF).

- Mantener Cada Semana:** Si hoy mucha suciedad, auto-fregar cada semana con borros rojas y 1.64 diluido de Sport Clean (1143SF). Refiérese al Galitico de Parat para el Mantenimiento de Pisos de Madera, o al Manual, para más detalles.

PRECAUCIÓN: No use otros productos limpiadores que no sea el Sport Clean (1143SF) marca Essential ya que otros productos reducirán la longevidad y desempeño del producto.

- Restaurador:** Trapee el polvo del piso. Trapee el polvo del piso. Siga las instrucciones para restauración del Limpiador y Restaurador Sport Prep Ultra (426SF).

GARANTÍA LIMITADA: Cuando se uso de acuerdo a las instrucciones de la etiqueta, Essential Industries garantiza que el Sport Kote PC, esta libre de defectos de manufactura, material y diseño. Esta garantía no aplica si las condiciones son resultado de: a) uso inadecuado del producto; b) no seguir las instrucciones; y c) mal uso, accidente o alteración del producto. Preparación de la superficie, método de aplicación y condiciones de ambiente del local tales como flujo de aire, temperatura y humedad están fuera de nuestro control y afectan al desempeño de Sport Kote PC. ESSENTIAL NO HACE NINGUNA OTRA GARANTÍA, INCLUYENDO PERO NO LIMITADA A UNA GARANTÍA IMPLICADA A QUE EL PRODUCTO ES APTO PARA UN USO ORDINARIO O A UN PROPOSITO EN PARTICULAR. Si el producto resultara defectuoso, el remedio único y exclusivo será reemplazar el producto o devolverse el valor del precio de compra. Essential Industries no es responsable por pérdidas o daños a causa del uso inadecuado del Sport Kote PC.

Leer la etiqueta antes del uso. Mantener fuera del alcance de los niños. Si se necesita consultar a un médico, tener a mano el recipiente o la etiqueta del producto.

(WARNING: Reproductive Harm - www.P65Warnings.ca.gov)

Consulte la Hoja de Datos de Seguridad Antes de Usar este Producto.

Solamente Para Uso Comercial, Industrial e Institucional.

Contenido Neto: 18.9 Litros



Scan QR code or go to www.essind.com for access to product information and Safety Data Sheet.
Scanner le code QR ou consulter www.essind.com pour accéder à l'information sur le produit et la Fiche de Données de Sécurité.
Escanee el código QR o visite www.essind.com para acceder a la información del producto y la Hoja de Datos de Seguridad.

(FRANÇAIS)

MODE D'EMPLOI

LIRE TOUTES LES INSTRUCTIONS AVANT D'APPLIQUER LE PRODUIT

(Le non-respect de ces instructions annule la garantie de ce produit)

- Préparation du Plancher:** Ce fini n'est pas fait pour être appliqué sur des planchers de bois non finis. N'utilisez que sur des surfaces qui ont été rendues échantons ou probables. Utiliser seulement après avoir reçu une formation adéquate. **Frotter et Remettre une Couche:** Passez le plancher à la serpillière et enlevez tous les chewing gums et les étiquettes. Préparer le sol avec le Sport Prep Ultra™. Nettoyer et Rénover (426SF) suivant le mode d'emploi sur l'étiquette du produit Sport Prep Ultra.

REMARQUE: Testez un plancher recouvert d'un fini à un endroit peu visible avant de mettre une nouvelle couche pour déterminer la compatibilité du produit avec le fini existant. Ne pas appliquer plus de 2 couches en 24 heures et ne pas dépasser un maximum de 3 couches en 48 heures. Voir les instructions sur l'application du fini ci-dessous.

- Application du Fini:** Ajoutez doucement avant usage. Appliquez à raison de 800-1000 pieds carrés par gallon (20-25 m² par litre). Utilisez une barre en forme de T retenue avec un poids et munie d'un tampon à froter synthétique propre. Appliquez en couches minces et uniformes dans le sens des fibres du bois en avançant d'un pas lent et régulier. Le marche trop rapide risque de produire des bulles excessives dans le fini. Laissez sécher pendant au moins une heure entre chaque couche. Les conditions humides demandent un temps de séchage plus long. Après que la première couche a séché, appliquez une seconde couche. Vous ne devez passer un tamis que sur la première couche si le grain du bois s'est soulevé ou s'il a fallu plus de 4 heures pour que la couche sèche. Si c'est le cas, faites-le avec un tamis déjà utilisé de 120 ou un patin marion. Toujours passer à l'aspirateur et humecter à fond après cela.

REMARQUE: Vérifier la date d'expiration. Contacter Essential pour mettre à jour la certification du lot si la date d'expiration est dépassée. Ne pas remettre dans le récipient d'origine le fini qui n'a pas été utilisé.

- Entretien Journalier:** Dépoussiérez au moins une fois par jour ou plus souvent si nécessaire pour que votre plancher soit sans poussière ni saleté. Si du liquide ou du sel etc. a été renversé, passez une serpillière essorée à fond et humectez de Sport Clean (1143SF) pour l'enlever.

- Entretien Hebdomadaire:** Si la saleté est importante, passez à la brosse automatique chaque semaine avec des poins ruges et une dilution 1:64 de Sport Clean (1143SF). Se reporter au tableau mural sur l'entretien des planchers en bois ou au manuel pour des détails supplémentaires.

AVERTISSEMENT: Ne pas utiliser les nettoyeurs autres que le Sport Clean (1143SF) puisqu'ils réduisent la performance et la durabilité du produit.

- Remise à Neuf:** Epoussez le plancher avec un balai à dépoussiérer. Suivre le mode d'emploi rénovation pour le Sport Prep Ultra (426SF).

GARANTIE LIMITÉE: Quand le produit est utilisé suivant les instructions sur l'étiquette, Essential Industries garantit que le Sport Kote PC est libre de défauts de fabrication, de matériaux et de conception. Cette garantie ne s'applique pas aux conditions qui proviennent: (a) de l'utilisation incorrecte du produit; (b) du non-respect des instructions; et (c) de l'utilisation abusive, d'un accident ou d'une altération du produit. La préparation de la surface, la méthode d'application et les conditions environnementales de l'endroit telles que le courant atmosphérique, la température et l'humidité sont en dehors de notre contrôle et affectent la performance de Sport Kote PC. ESSENTIAL NE DONNE AUCUNE AUTRE GARANTIE, Y COMPRIS MAIS SANS ÊTRE LIMITÉE À, TOUTE GARANTIE IMPLIQUE DE CARACTÈRE COMMERCIALISABLE OU D'ADEQUATION A UN BUT PRECIS. Si le produit est considéré défectueux par Essential, votre remède exclusif sera le remplacement du produit ou le remboursement du prix d'achat. Essential Industries ne sera pas tenu pour responsable de toute perte ou dommage résultant de l'utilisation incorrecte de Sport Kote PC.

Lire l'étiquette avant utilisation. Tenir hors de portée des enfants. En cas de consultation d'un médecin, garder à disposition le récipient ou l'étiquette.

(WARNING: Reproductive Harm - www.P65Warnings.ca.gov)

ATTENTION: Troubles de l'appareil reproducteur - www.P65Warnings.ca.gov.

Lire la Fiche de Sécurité Avant d'Utiliser.

Pour Usage Commercial, Industriel ou Institutionnel Seulement.

Contenu Net: 18.9 Litres



www.essind.com

Grout Avenger™

Cleans - Whitens - Maintains
Nettoie - Blanchit - Entretien
Limpio - Blanquea - Conserva

299RR

ESSENTIAL INDUSTRIES 1 GALLON 3.8 LITERS

(ENGLISH)

Grout Avenger quickly penetrates and releases the toughest soils from grout lines and stone surfaces. It removes body oils, soap scum, grease, grout, grime and efflorescence stains. Use it on shower floors and walls, bathroom floors and walls, kitchen floors and other areas with grouted surfaces. Grout Avenger can be used on ceramic, terrazzo, brick pavers, stone and granite.

DIRECTIONS

Dilute with water (see below). Apply with a mop or sprayer. Let stand for 10 minutes and agitate with a brush. Pick up excess solution and rinse well with water.

Heavy Soils Dilute 1:4 (20 ounces per gallon).

Moderate Soils Dilute 1:8 (10 ounces per gallon).

Light Soils Dilute 1:32 (4 ounces per gallon).

NOTE: Do not use on marble or soft stone.

Danger

Causes severe skin burns and eye damage. Read label before use. Keep out of reach of children. If medical advice is needed, have product container or label or hand. Wear protective gloves. Wear eye or face protection. Wash thoroughly after handling.

FIRST AID: IF INHALED: Remove victim to fresh air and keep at rest in a position comfortable for breathing. Immediately call a POISON CENTER or physician. **IF SWALLOWED:** Immediately call a POISON CENTER or physician. Do not induce vomiting. **IF ON SKIN (or hair):** Use immediately or contaminated clothing. Rinse skin with water or shower. Wash contaminated clothing before reuse. Immediately call a POISON CENTER or physician. **IF IN EYES:** Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. Immediately call a POISON CENTER or physician.

Store locked up. Dispose of contents and container in accordance with all local, regional, national and international regulations.

This product contains 6.4% phosphorus by weight.

See Product Safety Data Sheet Before Using.

For Commercial, Industrial and Institutional Use Only.

Ingredients: Water (7722-82-3), Phosphoric acid (7664-38-2), Nonylphenol polyethylene glycol ether (27207-07-3), Benzylphenyl methylpropionate (101-54-0), Hexyl alcohol (111-84-9), Alkyl dimethyl benzyl ammonium chloride (272-10) (10091-01-3). For more ingredient information, visit <https://www.essentialindustries.com/ingredient-disclosure>

Net Contents: One Gallon (3.8 Liters)

(FRANÇAIS)

Grout Avenger pénètre et libère les saletés les plus fortes sur les lignes jointées et les surfaces en pierre. Il élimine les huiles corporelles, résidus de savon, graisse, résidus alcalins et taches de moisissures. Utiliser sur les sols et parois de douche, les sols et murs de toilettes, les sols de cuisine et les autres endroits avec surfaces jointées. Grout Avenger peut être utilisé sur céramique, terrazzo, pavés en brique, ardoise et granit.

MODE D'EMPLOI

Diluer avec de l'eau (voir ci-dessous). Appliquer avec balai-brosse ou pulvérisateur. Laisser reposer 10 minutes et agiter avec une brosse. Ramasser l'excès de solution et rincer bien à l'eau.

Solaires lourdes Diluer 1:4 (20 onces par gallon).

Solaires moyennes Diluer 1:8 (10 onces par gallon).

Solaires légères Diluer 1:32 (4 onces par gallon).

REMARQUE: Ne pas utiliser sur la marbre ou la pierre tendre.

Danger

Provoque des brûlures de la peau et des lésions oculaires graves. Lire l'étiquette avant utilisation. Tenir hors de portée des enfants. En cas de consultation d'un médecin, garder à disposition le récipient ou l'étiquette. Porter des gants de protection. Porter une protection oculaire ou faciale. Porter des vêtements de protection. Se laver les mains soigneusement après manipulation.

PREMIERS SECOURS: EN CAS D'INHALATION: Transporter la victime à l'extérieur et la maintenir au repos dans une position où elle peut confortablement respirer. Appeler immédiatement un CENTRE ANTIPOLISON ou un médecin. **EN CAS D'INGESTION:** Appeler immédiatement un CENTRE ANTIPOLISON ou un médecin. Rincer la bouche. Ne PAS faire vomir. **EN CAS DE CONTACT AVEC LA PEAU (ou les cheveux):** Retirer immédiatement tout vêtement contaminé. Rincer la peau avec de l'eau ou du savon. Laver les vêtements contaminés avant réutilisation. Appeler immédiatement un CENTRE ANTIPOLISON ou un médecin. **EN CAS DE CONTACT AVEC LES YEUX:** Rincer avec précaution à l'eau pendant plusieurs minutes. Enlever les lentilles de contact si la victime en porte et si elles peuvent être facilement retirées. Continuer à rincer. Appeler immédiatement un CENTRE ANTIPOLISON ou un médecin.

Garder sous clé. Éliminer le contenu et le récipient conformément à toutes les réglementations locales, régionales, nationales et internationales.

Ce produit contient 6.4% de phosphore par poids.

Voir la Fiche de Sécurité Avant d'Utiliser.

Pour Usage Commercial, Industriel ou Institutionnel S'adresser à:

Contenu Net: 3.8 Litres

Essential Industries, Inc.
P.O. Box 12 - Marquette, Wisconsin 53266-0012 USA
(800) 551-6679 - (262) 338-1122 - www.essential.com

Si vous avez un produit, il est peut-être contaminé, et vous ne le pouvez pas le jeter. Veuillez vous adresser à www.essential.com/ingredient-disclosure

(ESPAÑOL)

Grout Avenger penetra rápidamente y libera las saletas más fuertes de las juntas y las superficies de piedra. Elimina las manchas corporales, los residuos de jabón, la grasa, los residuos alcalinos y las manchas de moho. Se usa en pisos y paredes de ducha, suelos de baño y en paredes, pisos de la cocina y otras áreas con superficies juntas. Grout Avenger se puede utilizar en cerámica, terrazo, pavimentos de ladrillo, la piedra y el granito.

INSTRUCCIONES

Diluir con el agua (véase más adelante). Aplicar con un trapero o pulverizador. Dejar reposar durante 10 minutos y frotar con un cepillo. Recoger el exceso de solución y enjuagar bien con agua.

Suelos pesados Diluir 1:4 (20 onzas por galón).

Suelos moderados Diluir 1:8 (10 onzas por galón).

Suelos ligeros Diluir 1:32 (4 onzas por galón).

NOTA: No lo use en mármol o piedra blanda.

Peligro

Provoca graves quemaduras en la piel y lesiones oculares. Leer la etiqueta antes del uso. Mantener fuera del alcance de los niños. Si se necesita consultar a un médico, tener a mano el recipiente o la etiqueta del producto. Usar guantes de protección. Usar protección para los ojos o la cara. Usar ropa protectora. Lavarse cuidadosamente las manos después de la manipulación.

PRIMEROS AUXILIOS: EN CASO DE INHALACIÓN: Transportar la víctima al aire libre y mantenerla en reposo en una posición que le facilite la respiración. Llamar inmediatamente a un CENTRO DE CONTROL DE ENVENENAMIENTO o a un médico. **EN CASO DE INGESTIÓN:** Llamar inmediatamente a un CENTRO DE CONTROL DE ENVENENAMIENTO o a un médico. Enjuagar la boca. NO provocar el vómito. **EN CASO DE CONTACTO CON LA PIEL (o el pelo):** Quitar inmediatamente toda la ropa contaminada. Lavar la piel con agua o jabón. Si la ropa está contaminada, lavar la ropa contaminada antes de volverla a usar. Llamar inmediatamente a un CENTRO DE CONTROL DE ENVENENAMIENTO o a un médico. **EN CASO DE CONTACTO CON LOS OJOS:** Enjuagar con agua inmediatamente durante varias minutos. Quitar los lentes de contacto, cuando estos se presenten y pueda hacerse con facilidad. Procurar con el lavado. Llamar inmediatamente a un CENTRO DE CONTROL DE ENVENENAMIENTO o a un médico.

Guardar bajo llave. Eliminar el contenido y recipiente conforme a todas las regulaciones locales, regionales, nacionales e internacionales.

Este producto contiene un 6.4% de fósforo de peso.

Consulte la Hoja de Datos de Seguridad Antes de Usar este Producto.

Sólo para Uso Comercial, Industrial e Institucional.

Contenido Neto: 3.8 Litros



Scan QR code or go to www.essential.com/ingredient-disclosure for more information on Safety Data Sheet.
 Si escanear el código QR o ir a www.essential.com/ingredient-disclosure para obtener más información sobre la Hoja de Datos de Seguridad.
 Escanea el código QR o visita www.essential.com/ingredient-disclosure para obtener más información sobre la Hoja de Datos de Seguridad.

APPLICATION: 1. Strip floors to remove old waxes, sealers and finishes. 2. Rinse thoroughly and let dry. 3. With clean equipment apply thin, even coats of finish. 4. Under normal conditions, allow to dry for 30 minutes between coats. 5. For best results, apply a maximum of 4 coats in 24 hours.


NOTE: For stripping and maintaining asbestos containing tile, follow OSHA or EPA guidelines.

COVERAGE: One gallon covers up to 3,000 square feet (1 liter covers 75 m²).

MAINTENANCE: 1. **Daily:** Sweep or dust mop as necessary to remove gritty soil. 2. **Dirty Floors:** Clean with 2-4 oz. of neutral floor cleaner per gallon of water (16-32 ml per liter). Rinse and let dry. 3. **Traffic Area:** Clean with 2-4 oz. of neutral floor cleaner per gallon (16-32 ml per liter) of water. Rinse and let dry. Apply additional thin coats of floor finish to traffic lanes as needed. 4. **Buffing:** If desired, periodic burnishing with blended hair pads will enhance appearance. 5. **Periodic Complete Maintenance:** Ordinarily, stripping is not required more than (1) or (2) times per year. Use up to 32 oz. of our stripper per gallon (256 ml per liter) of water.

QR
code

Scan QR code for
access to the Safety
Data Sheet.

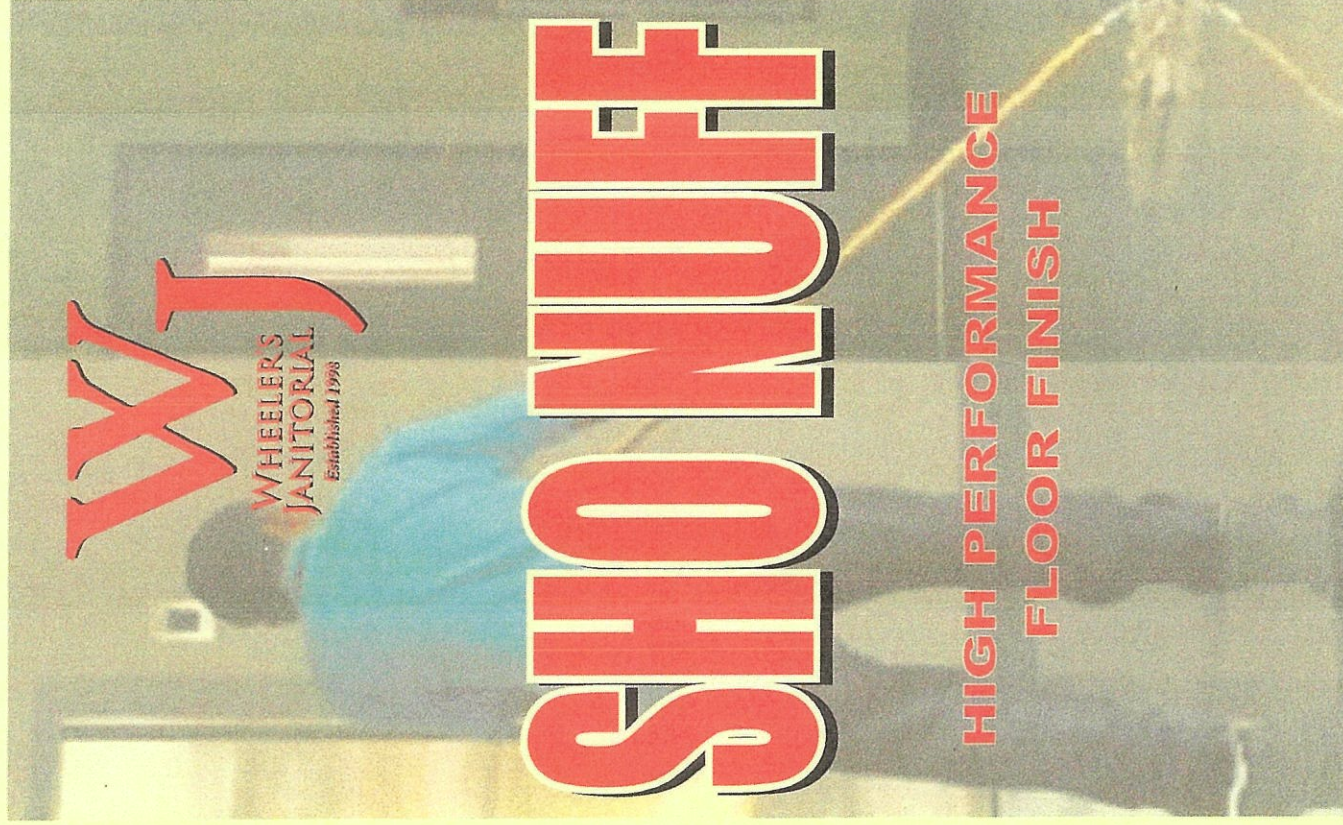

Read label before use. Keep out of the reach of children. If medical advice is needed, have product container or label at hand.

Percentage of the mixture consisting of ingredient(s) of unknown toxicity: 15%. There is no toxicity data available for the polymer in this product, which is exempt and categorized in a low-concern functional group under the EPA's Toxic Substance Control Act (TSCA).

This finish meets ASTM D2047 method for slip resistance.

Maximum VOC Content: 2%

NOT FOR USE IN THE STATE OF CALIFORNIA

See Product Safety Data Sheet Before Using.

For Commercial, Industrial and Institutional Use Only.

Contents: Water 7732-18-5, Acrylic Polymer N.A., 2-(2-ethoxyethoxy) ethanol 111-90-0, (2-methoxymethylethoxy) propanol 34590-94-8; Wax emulsion N.A. 213B1621



**Wheeler's Janitorial
Supplies & Equipment**
809 North Jackson Street
Crystal Springs, MS 39059

Phone: 601-892-7547 Fax: 601-892-0685
Email: wheelersjanitorial@yahoo.com
www.wheelersjanitorial.com

BIO CONQUEROR 105

Bio-Active Concentrate
For Professional Use

MANGO



Consumes the odor source

Ultra concentrated formula

Environmentally friendly

Made in U.S.A.
1 Quart (946 ml.)

**WHEELER'S
JANITORIAL**

WHEELER'S JANITORIAL
809 N Jackson St. • Crystal Springs, MS 39059
(601) 892-7547 • wheelersjanitorial.com

This non-toxic, biodegradable concentrate is packed with billions of enzyme-producing bacteria that consume the source of odors, coupled with powerful fragrances that immediately freshen the area. Effective in a wide range of odors including, but not limited to, urine/waste/soils/decomposing food, and pet accidents.

CAUTION: Use only as directed. Keep out of reach of children. If swallowed, call a physician. If product gets into eyes, wash with water and get medical attention if irritation persists.

DIRECTIONS/DILUTIONS: Shake well before use. Pretest for color fastness on fabric/carpet if appropriate. Remove odor source or spill as best as possible before treating. Contains bacteria, do not spray into the air.



1-2 oz. per gallon of
extraction solution.



Spray directly
around toilets
and urinals.



Spray concentrate
into can or dumpster.



2-4 oz. per gallon.
Apply using a mop
or sponge.



Use 4-8 oz.
per day.



Spray affected area.
Cover with rag. Extract.

Signature: _____ Date of approval: _____

INK COLOR = Black Blue Red Orange Green Purple

BIO CONQUEROR 105

Bio-Active Concentrate
For Professional Use

MANGO



Consumes the odor source
Ultra concentrated formula
Environmentally friendly


Made in U.S.A
1 Gallon (3.7L)

WHEELER'S
JANITORIAL

This non-toxic, biodegradable concentrate is packed with billions of enzyme-producing bacteria that consume the source of odors, coupled with powerful fragrances that immediately freshen the area. Effective in a wide range of odors including, but not limited to, urine/waste/toilets/decomposing food, and pet accidents.

CAUTION: Use only as directed. Keep out of reach of children. If swallowed call a physician. If product gets into eyes, wash with water and get medical attention if irritation persists.

DIRECTIONS/DILUTIONS: Shake well before use. Pretest for color fastness on fabric/carpet if appropriate. Remove odor source or spill as best as possible before treating. Contains bacteria, do not spray into the air.




WHEELER'S JANITORIAL

809 N Jackson St. • Crystal Springs, MS 39059
(601) 892-7547 • wheelersjanitorial.com

Signature: _____ Date of approval: _____

INK COLOR = Black Blue Red Orange Green Purple



Bio-Clean

MANGO

Bio-Active Concentrate – For Professional use



Consumes the odor source
Ultra concentrated formula
Environmentally friendly

Made in U.S.A.

1 Quart (946 ml.)

This non-toxic, biodegradable concentrate is packed with billions of enzyme-producing bacteria that consume the source of odors, coupled with powerful fragrances that immediately freshen the area. Effective in a wide range of odors including, but not limited to, urine/waste/soils/decomposing food, and pet accidents.

CAUTION: Use only as directed. Keep out of reach of children. If swallowed, call a physician. If product gets into eyes, wash with water and get medical attention if irritation persists.


DIRECTIONS/DILUTIONS: Shake well before use. Pretest for color fastness on fabric/carpet if appropriate. Remove odor source or spill as best as possible before treating. Contains bacteria, do not spray into the air.



1-2 oz. per gallon of extraction solution.



Spray directly around toilets and urinals.



Spray concentrate into can or dumpster.



2-4 oz. per gallon. Apply using a mop or sponge.




Use 4-8 oz. per day.



Spray affected area. Cover with rag. Extract.

WHEELER'S JANITORIAL

809 N Jackson St. • Crystal Springs, MS 39059
(601) 892-7547 • wheelersjanitorial.com



CONQUEROR103

Odor Counteractant Concentrate – For Professional Use

TUTTI FRUTTI



Cleans & Deodorizes
Powerful Concentrated Formula
Environmentally friendly

Made in U.S.A.

1 Quart (946 ml.)

This safe, non-toxic, biodegradable concentrate is packed with powerful surfactants and fragrance to help clean and *immediately* freshen. Effective in a wide range of cleaning applications including: mop water/floor scrubbers/laundry/foggers/foggers/trigger sprayers, etc.

Specifically formulated to combat odors associated with urine/waste/vomit/soils/decomposing food/pet accidents/etc.

DIRECTIONS/DILUTIONS: Shake well before use. Pretest for color fastness on fabric/carpet if appropriate. Remove odor source or spill as best as possible before treating.



2-4 oz. per gallon.
Can use in fogger.



1 oz. per load
of laundry.



Spray concentrate
into can or dumpster.



2-4 oz. per gallon.
Apply using a mop
or sponge.



Spray directly
around toilets
and urinals.



Works with
floor scrubbers

WHEELER'S JANITORIAL
809 N Jackson St. • Crystal Springs, MS 39059
(601) 892-7547 • wheelersjanitorial.com

Signature: _____ Date of approval: _____

INK COLOR = Black Blue Red Orange Green Purple

BIO CONQUEROR 105

Bio-Active Concentrate
For Professional Use

FABULOUS



Consumes the odor source
Ultra concentrated formula
Environmentally friendly

Made in U.S.A.
1 Quart (946 mL)

WHEELER'S
JANITORIAL

This non-toxic, biodegradable concentrate is packed with billions of enzyme-producing bacteria that consume the source of odors, coupled with powerful fragrances that immediately freshen the area. Effective in a wide range of odors including, but not limited to, urine/waste/soils/decomposing food, and pet accidents.

CAUTION: Use only as directed. Keep out of reach of children. If swallowed, call a physician. If product gets into eyes, wash with water and get medical attention if irritation persists.

DIRECTIONS/DILUTIONS: Shake well before use. Pretest for color fastness on fabric/carpet if appropriate. Remove odor source or spill as best as possible before treating. Contains bacteria, do not spray into the air.



1-2 oz. per gallon of
extraction solution.



Spray directly
around toilets
and urinals.



Spray concentrate
into can or dumpster.



2-4 oz. per gallon.
Apply using a mop
or sponge.



Use 4-8 oz.
per day.



Spray affected area.
Cover with rag. Extract.

WHEELER'S JANITORIAL

809 N Jackson St. • Crystal Springs, MS 39059
(601) 892-7547 • wheelersjanitorial.com

Signature: _____ Date of approval: _____

INK COLOR = Black Blue Red Orange Green Purple

BIO CONQUEROR 105

Bio-Active Concentrate
For Professional Use

FABULOUS



Consumes the odor source
Ultra concentrated formula
Environmentally friendly


Made in U.S.A
1 Gallon (3.7L)

WHEELER'S
JANITORIAL

This non-toxic, biodegradable concentrate is packed with billions of enzyme-producing bacteria that consume the source of odors, coupled with powerful fragrances that immediately freshen the area. Effective in a wide range of odors including, but not limited to, urine/waste/solis/decomposing food, and pet accidents.

CAUTION: Use only as directed. Keep out of reach of children. If swallowed, call a physician. If product gets into eyes, wash with water and get medical attention if irritation persists.

DIRECTIONS/DILUTIONS: Shake well before use. Pretest for color fastness on fabric/carpet if appropriate. Remove odor source or spill as best as possible before treating. Contains bacteria, do not spray into the air.



WHEELER'S JANITORIAL
809 N Jackson St. • Crystal Springs, MS 39059
(601) 892-7547 • wheelersjanitorial.com

Signature: _____ Date of approval: _____

INK COLOR = Black Blue Red Orange Green **Purple**



CONQUEROR 103

Odor Counteractant Concentrate – For Professional Use
MANGO



Cleans & Deodorizes
Powerful Concentrated Formula
Environmentally friendly

Made in U.S.A.

1 Quart (946 ml.)

This safe, non-toxic, biodegradable concentrate is packed with powerful surfactants and fragrance to help clean and *immediately freshen*. Effective in a wide range of cleaning applications including: mop water/floor scrubbers/laundry/foggers/trigger sprayers, etc.

Specifically formulated to combat odors associated with urine/waste/vomit/soils/decomposing food/pet accidents/etc.

DIRECTIONS/DILUTIONS: Shake well before use. Pretest for color fastness on fabric/carpet if appropriate. Remove odor source or spill as best as possible before treating.



2-4 oz. per gallon.
Can use in fogger.



1 oz. per load
of laundry.



Spray concentrate
into can or dumpster.



2-4 oz. per gallon.
Apply using a mop
or sponge.



Spray directly
around toilets
and urinals.



Works with
floor scrubbers

WHEELER'S JANITORIAL

809 N Jackson St. • Crystal Springs, MS 39059
(601) 892-7547 • wheelersjanitorial.com

Signature: Micki Wheeler

Date of approval: 6/24/22

INK COLOR = Black Blue Red Orange Green Purple



CONQUEROR103

Odor Counteractant Concentrate – For Professional Use

TUTTI FRUTTI



Cleans & Deodorizes

Powerful Concentrated Formula

Environmentally friendly

Made in U.S.A.

1 Quart (946 ml.)

This safe, non-toxic, biodegradable concentrate is packed with powerful surfactants and fragrance to help clean and *immediately freshen*. Effective in a wide range of cleaning applications including: mop water/floor scrubbers/laundry/foggers/trigger sprayers, etc.

Specifically formulated to combat odors associated with urine/waste/vomit/soils/decomposing food/pet accidents/etc.

DIRECTIONS/DILUTIONS: Shake well before use. Pretest for color fastness on fabric/carpet if appropriate. Remove odor source or spill as best as possible before treating.



2-4 oz. per gallon.
Can use in fogger.



1 oz. per load
of laundry.



Spray concentrate
into can or dumpster.



2-4 oz. per gallon.
Apply using a mop
or sponge.



Spray directly
around toilets
and urinals.



Works with
floor scrubbers

WHEELER'S JANITORIAL

809 N Jackson St. • Crystal Springs, MS 39059

(601) 892-7547 • wheelersjanitorial.com

Signature: _____ Date of approval: _____

INK COLOR = Black Blue Red Orange Green Purple

ITEM #421MP · STAIN RESISTANT TOP SHIELD

DIRECTIONS FOR USE:

NOTE: CLS TopShield Stain Resistant "Top Shield" is an RTU ("Ready-to-Use") product designed to be used undiluted.

1. Clean floor with a neutral cleaner. Allow floor to dry thoroughly.
2. Apply thinly and evenly on the floor using a pump-up sprayer at an approximate coverage rate of 3500 sq ft per gallon.
3. Spread evenly on the floor using a clean micro-fiber applicator or lint free flat fiber mop pre-sprayed with top shield.
4. After the product has dried thoroughly, burnish the floor using a hair blend pad.
5. Apply a second coat, following instructions 2-4.
6. Do not allow water on the floor for at least 24 hours.

Keep out of reach of children. Keep container sealed when not in use. Keep from freezing.

WARNING! HAZARDS: Causes skin irritation. Causes serious eye irritation. May cause respiratory irritation.

PRECAUTIONS: Avoid breathing mist/vapours/spray. Wash thoroughly after handling. Use only outdoors or in a well-ventilated area. Wear protective gloves/eye protection/face protection. Take off contaminated clothing and wash it before reuse. Store in a well-ventilated place. Keep container tightly closed. Store locked up. Dispose of contents/container in accordance with local /regional /national /international regulations.

FIRST AID: Call a POISON CENTER/doctor if you feel unwell. IF ON SKIN: Wash with plenty of water. If skin irritation occurs: Get medical advice/attention. IF INHALED: Remove person to fresh air and keep comfortable for breathing. IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If eye irritation persists: Get medical advice/attention.

CONTAINS: Silica, amorphous (CAS# 7631-86-9).

Safety Data Sheet available on request. FOR COMMERCIAL AND INDUSTRIAL USE ONLY.



CLS TopShield™ STAIN RESISTANT TOP SHIELD

CONTENTS:

1.06 US GALLONS (4 LITERS)

PRODUCT OR MAINTENANCE INFO?

Call: Amano Pioneer Eclipse® Corp.
1-800-367-3550 • 1-336-372-8080
1 Eclipse Road, PO Box 909
Sparta, NC 28675 • USA
Fax: 1-336-372-2895
www.pioneereclipse.com

FOR CHEMICAL EMERGENCY: Spill, leak, fire, exposure, or accident. Call CHEMTREC day or night. Within USA and Canada: 1-800-424-9300. Outside USA and Canada: +1-703-527-3887 (collect calls accepted).



© 2019 Amano Pioneer Eclipse Corp. 421MP-02/19



Flash 55TM

HIGH PERFORMANCE FLOOR STRIPPER

CONTENTS:
1.06 US GALLONS (4 LITERS)

PRODUCT OR MAINTENANCE INFO?
Call: Amano Pioneer Eclipse[®] Corp.
1-800-367-3550 • 1-336-372-8080
1 Eclipse Road, PO Box 909
Sparta, NC 28675 • USA
Fax: 1-336-372-2895
www.pioneereclipse.com

FOR CHEMICAL EMERGENCY: Spill, leak, fire, exposure, or accident. Call CHEMTREC day or night. Within USA and Canada: 1-800-424-9300. Outside USA and Canada: +1-703-527-3887 (collect calls accepted).

ITEM #516MP - FLOOR STRIPPER

DIRECTIONS FOR USE:

1. Mix stripper with cold water per the following dilutions:
Heavy coating removal: 1:4 (32 US oz per gallon / 250 ml per 1 liter of water).
Normal coating removal: 1:8 (16 US oz per gallon / 125 ml per 1 liter of water).
Light coating removal: 1:16 (8 US oz per gallon / 62 ml per 1 liter of water).
2. Apply solution liberally to the floor and allow to soak for 10 minutes ensuring the solution does not dry.
3. Scrub floor with automatic scrubber or stripping machine. Pick up dirty solution with automatic scrubber or wet vac.
4. Rinse thoroughly with clean water and allow floor to dry completely before applying any finish.

Note: Test floor for color fastness in an inconspicuous area.

Keep out of reach of children. Keep container sealed when not in use. Keep from freezing. Floor may become very slippery. Wear appropriate non-slip safety shoes. This product should not be used in contact with wood, rubber, painted surfaces or on asphalt or asbestos tile.


DANGER! HAZARDS: Causes severe skin burns and eye damage. Harmful if inhaled.

PRECAUTIONS: Do not breathe mist/vapours/spray. Wash thoroughly after handling. Use only outdoors or in a well-ventilated area. Wear protective gloves/eye protection/face protection. Wash contaminated clothing before reuse. Store in a well-ventilated place. Keep container tightly closed. Store locked up. Dispose of contents/container in accordance with local, regional, national, and international regulations.

FIRST AID: Immediately call a POISON CENTER/doctor if you feel unwell. IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses if possible. Continue rinsing. IF ON SKIN OR HAIR: Immediately remove all contaminated clothing. Rinse skin with water/shower. IF INHALED: Remove person to fresh air and keep comfortable for breathing. IF SWALLOWED: Rinse mouth. Do NOT induce vomiting. Call a POISON CENTER/doctor.

CONTAINS: Ethylene glycol monobutyl ether (CAS# 111-76-2), monoethanolamine (CAS# 141-43-5).

Safety Data Sheet available on request. FOR COMMERCIAL AND INDUSTRIAL USE ONLY.

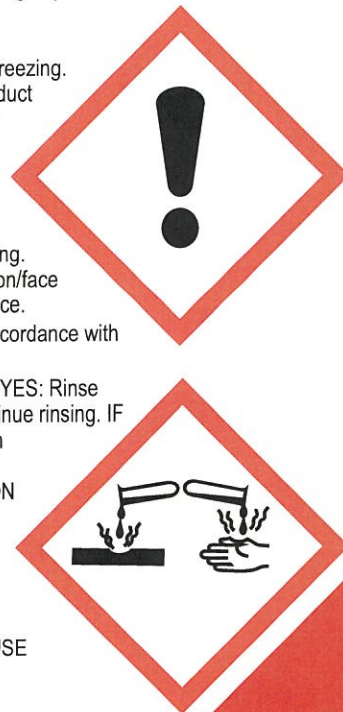

© 2017 Amano Pioneer Eclipse Corp. 516MP-12/16

**Pioneer
Eclipse**
An AMANO Company

Ultra-TMMSC NON-DETERGENT CLEANER

CONTENTS:
1.06 US GALLONS (4 LITERS)

PRODUCT OR MAINTENANCE INFO?
Call: Amano Pioneer Eclipse® Corp.
1-800-367-3550 • 1-336-372-8080
1 Eclipse Road, PO Box 909
Sparta, NC 28675 • USA
Fax: 1-336-372-2895
www.pioneereclipse.com

FOR CHEMICAL EMERGENCY: Spill, leak, fire,
exposure, or accident. Call CHEMTREC day or night.
Within USA and Canada: 1-800-424-9300. Outside USA
and Canada: +1-703-527-3887 (collect calls accepted).

ITEM 3038MPE • NON-DETERGENT CLEANER



DIRECTIONS FOR USE: ROUTINE FLOOR CLEANING

Finished VCT:

1. Mix at dilution of 1 oz. per gallon of cold water.
2. Damp mop or autoscrub using a red cleaning pad.

Hard Floors such as Quarry and Ceramic Tile:

1. Mix at dilution of 4 oz. per gallon of cold water. For heavy soil buildup mix at 12-16 oz. per gallon of cold water.
2. Damp mop, autoscrub using a red cleaning pad or a scrub brush.

DIRECTIONS FOR USE: RESTORATION, REMOVE HEAVY SOILS AND EXISTING DETERGENT RESIDUE:

1. Mix at dilution of 12-16 oz. per gallon of cold water.
2. Apply use solution liberally and allow 10 minutes contact time before agitating and rinsing with cold water.

DIRECTIONS FOR USE: SPRAY AND WIPE CLEANING:

1. Mix at dilution of 4 oz. per gallon of cold water for routine soils. For heavy soils dilute 12-16 oz. per gallon of cold water.

DIRECTIONS FOR USE: CARPET CLEANING AND SPOTTING:

1. Mix at dilution of 8 oz. per gallon of cold water for routine soils. For heavy soils dilute 12-16 oz. per gallon of cold water.
2. Apply by trigger sprayer, pressurized spray, or with a carpet extractor.
3. Allow 5-10 minutes contact time before agitating with a carpet bonnet, bone scraper, spoon or carpet extractor.
4. Rinse and dry carpet thoroughly.

Note: Pre-test on carpet in an inconspicuous area to ensure color fastness. Not recommended for use on wool or natural fibers.

Keep out of reach of children. Keep container sealed when not in use. Keep from freezing.

WARNING! HAZARDS: Causes skin irritation. Causes serious eye irritation.

PRECAUTIONS: Wash thoroughly after handling. Wear protective gloves and eye protection. IF ON SKIN (or hair): Wash with plenty of water. If skin irritation occurs: Get medical advice/attention. IF IN EYES: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If eye irritation persists: Get medical advice/ attention. Take off contaminated clothing and wash it before reuse.

Contains: Trisodium phosphate (CAS# 7601-54-9).

No fragrance added. Dispose of contents and container in accordance with local, regional and national regulations. Please recycle container.

Safety Data Sheet available on request. FOR COMMERCIAL AND INDUSTRIAL USE ONLY.



© 2023 Amano Pioneer Eclipse Corp. 3038MPE-09/23

Laundry
Detergent

Laundry Detergent and Cleaning Supplies for Commercial and Household Use

Washboard



Clean

2.5 Gal/9.46L • 5 Gal/18.93L

Directions: Sort laundry, select temperature. Add two pumps or more for large or heavily soiled wash loads. Pretreat tough stains by pouring detergent on stain and rub.

Caution: Avoid contact with eyes. In case of accidental contact, rinse with warm water for 15 minutes. If irritation persists, consult a doctor. Dangerous if swallowed.

Ingredients: Water, sodium laureth sulfate, fragrance, colorant, FD&C Blue, Cocamidopropyl betaine, disodium distyrylbiphenyl disulfonate, alkylbenzenesulfonate, sodium citrate, alcohol. Contains no phosphate. This product includes biodegradable cleaning agents.

Instrucciones: Clasifique la ropa, seleccione la temperatura. Agregue dos bombas o mas para cargas de lavado grandes o muy solidas. Precaliente las manchas dificiles al verter detergente en la mancha y frote.

Precaución: Evitar el contacto con los ojos. En caso de contacto accidental, enjuague con agua tibia durante 15 minutos. Si la irritación persiste, consulte a un medico. Peligroso es tragado.

Ingredientes: Agua, laureth sulfato de sodio, fragancia, colorante: FD & C Azul, cocamidopropil, betaina disodica, disulfonato de distiribieno, alquibencenosulfonato de sodio citrato, alcohol. No contiene fosfato. Este producto incluye agentes de limpieza biogradables.

6"

Laundry Detergent and Cleaning Supplies for Commercial and Household Use

Fabric
Softener

Washboard



Clean

8"

2.5 Gal/9.46L • 5 Gal/18.93L

Directions: Softens clothing with a long lasting fragrance. For a small load use 1/2 ounces (Approximately 1 pump). For full loads use 2 ounces (Approximately 4 pumps). Add to final rinse cycle, not directly to clothing fabric. If spotting occurs, wet fabric clothing, rub with a mild liquid soap, and rise.

Caution: In case of accidental contact with eyes, rinse thoroughly with water. If irritation persists, consult a doctor. Do not use on fabrics that have flame retardant treatment. Keep out of reach of children.

Ingredients: Includes biodegradable fabric softening agent

Direcciones: Suaviza la tela de la ropa con un largo fragancia duradera. Para una pequeña carga utilizar 1/2 onzas (Aproximadamente 1 zapatillas). Para cargas completas use 2 onzas (Aproximadamente 4 bombas). Añadir al ciclo final de enjuague, no directamente a la tela de la ropa. Si ocurre manchado, Ropa de tela mojada, frote con un suave. Jabon liquido, y se levantan.

Precaución: En caso de contacto accidental con Ojos, enjuague bien con agua. Si Persiste la irritación, consulte a un médico. No usar en telas que tengan Tratamiento ignífugo. Mantener fuera del alcance de los niños.

Fundraising Option Call: (601) 566-4022 • (219) 577-7075 or Email: Washboardclean@gmail.com