
NAVIYD

Product Specifications	310
Product Planning Information	311
Product Options	313
Factory Installed Grommet and Cutout Options	314
Product Pages	316

- · Configured desk models include the base, worksurface and ships ready to
- Component bases include the base frame and ships ready to assemble. IMPORTANT: Worksurfaces must be specified separately
- Models with base top ship in two cartons; assembly is required
- · Four table base styles:
- T-leg L-configuration
- C-leg
- · Single-column H

WORKSURFACE



- Table desk worksurface sizes range from a nominal 36" to 72"
- Worksurfaces are available in HPL (high pressure laminate) 13/6" T or TFL (thermally fused laminate) 11/8" T, and both feature a 3mm vinyl rim
- Grain direction runs left-to-right unless otherwise noted
- Factory installed grommets and cut-outs are available in predetermined locations; upcharge applies. See pages 314-315

TABLE BASES

- · Bases are formed metal with a powder coat finish available in 3 standard finishes, Designer White, Cinder, Platinum Silver
- Optional powder finishes are available at an upcharge
- Bases are standard with 2" diameter black plastic glides with a ½" adjustment for unlevel floors
- · Casters Field installed caster kit (set of 4) available; order separately:
- used only on T-leas base style with rectangular worksurface tops 23"-29"
- not available on C-base styles
- low profile black plastic add 1½" to overall heights weight load for desk is 130 pounds with casters

HEIGHT ADJUSTABLE TABLE DESK

- · Control pad can be moved to right-handed (RH) or left-handed (LH) by the customer
- · Height adjustable range (with worksurface):
- standard height mechanism is 26" to 42½"
- extended height mechanism is 22½" to 48½"
- Lifting Capacity of base without worksurface:
- table desks are 265 pounds
- single column H is 132 pounds
- · Adjustment speed is 1.3" per second
- · Standard with Up and Down controller
- Two Optional Controller are available; see page 336
- Table desk frame width is expandable in 6" increments
- · Standard features:
- · anti-collision
- · overheat protection
- overload protection

CORD MANAGEMENT

- · Round grommets, racetrack grommets and wire managers are optional on worksurfaces
- Wire managers are available for vertical cable managers, cable carriers and maple cable basket; see page 749
- Refer to page 749 for available grommet/wire manager colors
- Refer to pages 314-315 for complete grommet locations and details

MONITOR ARMS

Clamp mount monitor arms cannot be used with modesty panel. It is recommended to field install a grommet mount model in a location to clear the

CONTROL BOX MECHANISM INFORMATION

- · Motor per style:
- straight line table desk has 1 control box, 2 motors single column H has 1 control box, 1 motor
- L-configurations desk has 1 control box. 3 motors
- · Anti-collision function on control box will engage when a firm obstruction is detected and will stop worksurface travel
- Overheat protection will stop the unit should the motor overheat due to being heavily loaded or if driven continuously. Operation of the desk can resume in approximately 15 minutes
- Overload protection detects if the load is too heavy and will stop the unit. Remove the load and resume use
- · Control box includes a 9' power cord with two-prong plug

IMPORTANT: The customer bears the responsibility to verify that the installation of Naviyd height adjustable desks complies with all local municipal electrical codes. Some municipalities require the worksurface and base to be sold as an assembly that is listed to UL 962. In these justifications, specify a Naviyd configured desk (base sold with a worksurface) model. Naviyd height adjustable bases (sold separately) will not bear the ETL mark. Base only models are available for use with specific Naviyd worksurfaces (sold separately) which align cut-outs, grommets, and screen brackets with the base understructure.

Naviyd height adjustable, base only models can accept other Kimball and National brand worksurfaces in 3/4", 13/16", and 19/16" thickness. It is the customer's responsibility to maintain recommended safety clearances to minimize pinch/crush hazards when using other Kimball and National brand worksurfaces.

Field installed grommets and cutouts are recommended where standard locations may interfere with the base understructure. Worksurface size should not exceed the recommended size.

Use of non-Kimball and non-National brand worksurfaces are not recommended and is the sole responsibility of the customer and may void the product warranty.

DIMENSION KEY

D Depth W Width Н Height

Overhang: Approach Side ΚW Kneespace Width

PRODUCT PLANNING INFORMATION


WORKSURFACE CLEARANCE

1" minimum clearance around the sides and back is required when placing height adjustable worksurfaces next to each other to minimize pinch/crush hazards. A clearance of less than % is acceptable next to a fixed wall or panel where the clearance is maintained through the travel range. Base feet are 23% deep.

STATIONARY STORAGE PLANNING

Pedestals, overhead storage, or components should not be installed in the path of the height adjustable desks. Underside of desk frame to floor is 22% for standard height and 18% for extended height models with the leveling glide in the lowest position.

MODESTY PANELS



Modesty panels provide user privacy and conceal electrical components. Modesty panels can extend the full width of the worksurface or be narrower than the surface.


TFL modesty panels are 3/4" thick and are edge banded in the same material and resin modesty panels are 3/4" thick.

When using a narrower modesty panel than the worksurface width, it is recommended to use a center grommet or cut-out, because the left and right locations could sit outside the modesty depending on the width specified.

Modesty panels are not sized to fit 120° curved corner desks or the return side of height adjustable L-configurations. Specify a smaller width, such as 66" wide modesty for a 72" wide worksurface.

To avoid interference, do not place storage, and other objects beneath the desk with modesty panel.

PRIVACY SCREENS



Textile privacy screens with frame attach to height adjustable desk worksurfaces to provide space division and privacy above and below the worksurface. Privacy screens feature a tackable textile surface (panel textile) with an aluminum frame which is available in all paint colors. Attachment brackets are painted to match the frame. IMPORTANT: Privacy screens are prohibited on desks with C-leg bases as they are a tip hazard due to placement of the column being off center.

Privacy screens can be specified to span the full width, or they can be narrower than the desk worksurface. A center cut-out or grommet is recommended on the narrower application to avoid interference with the screen's mounting brackets.

Privacy screens can be mounted with a 1" maximum gap to manage cables and accommodate a clamp-mount monitor arm.

To avoid interference, do not place storage, and other objects beneath the desk with privacy screen.

CONTROLLERS







Standard

Memory

Programmable

Standard up/down switch ships with all height adjustable desk bases. Switch is 2" D x 2^* " W x 3^* " H. Allows for upper and lower limits to be set to avoid collision with storage elements.

Memory control switch with display screen can be specified separately to replace a standard switch. It operates the same as the standard up/down switch. Memory control switch allows for a low position and a high position to be set to prevent the desk from interfering with obstructions, such as pedestals and overheads.

Programmable control switch with display screen allows up to four preset/saved height settings. Specify separately to replace a standard up/down switch.

All switches can be mounted on the left or right side of the work surface and are field installed.

BASE AND WORKSURFACE CONFIGURATION

- T-leg bases can be paired or are available configured with rectangular main or 120° curved corner worksurfaces
- T-leg L-configuration bases can be paired or are available configured with:
- Rectangular main worksurface and a rectangular return (non-handed)
- · Rectangular main worksurface and a rectangular return (non-handed)
- Extended straight (handed)
- Extended cove (handed)


Non-handed L-configuration models can be assembled in the field to accommodate left- or right-handed configurations


- C-leg bases can be paired or are available configured with rectangular worksurfaces only. IMPORTANT: C-leg bases are not available with 120° worksurface due to tipping hazard
- Single-column H component bases can be paired with 23" D x 36" W or 23" D x 42" W rectangular main worksurfaces

TOP SHAPE	TOP WIDTH	T-LEG TOP DEPTH	L-CONFIG TOP DEPTH	C-LEG TOP Depth	H-LEG TOP DEPTH
Rectangular Main	36" W				23"
	42" W				23"
	48" W	23"/30"		23"/30"	
	54" W	23"/30"		23"/30"	
	60" W	23"/30"	23"/30"	23"/30"	
	66" W	23"/30"	23"/30"	23"/30"	
	72" W	23"/30"	23"/30"	23"/30"	
Rectangular Return	36" W		23"		
	42" W		23"		
	48" W		23"		
120° Curved Corner	83" W	23"/30"			
Extd. Straight/Cove	71" W		23"/30"		


Note: 48" wide returns must be paired with a 23" deep main worksurface for a maximum depth of 72"; cannot be used with a 29" deep main worksurface. L bases support a maximum overall top width and depth of 72", and a minimum width and depth of 60".


DIMENSIONS

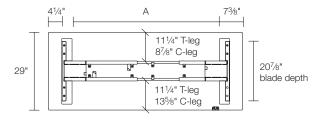

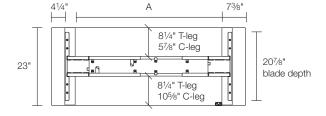

DISTANCE BETWEEN COLUMNS			
Width of Top "A" Dimension			
48"	32%"		
54"	38%"		
60"	445%"		
66"	50%"		
72"	56%"		

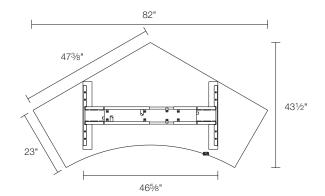

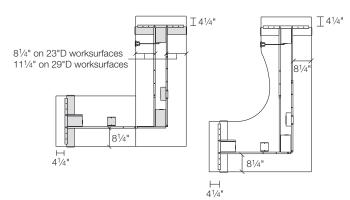

RIM PROFILE OPTIONS



Softened Vinyl (V)

VINYL SOFTENED RIM

793	Acorn	TM	Huntington
AD	Almond	DW	Judicial
MC	Amber	KN	Kona
AC2	Autumn 2	MW	Midtown
ΒZ	Brazilwood	MH	Mocha
IM	Brighton	YO	Monterey
CO	Canyon	NM	Natural
CL	Caramel	478	Platinum Grey
CI	Chai	PC	Porcini
462	Cinder	PT	Portico
492	Cinder Linear	PB	Portobello
440	Cloud	792	Sable
CC	Cordoba	SC	Sedona
CW	Cordovan	425	Shadow
457	Dapple	SK	Skyline
405	Designer White	460	Storm
491	Designer White Linear	TW	Tribeca
DF	Driftwood	TF	Truffle
450	Fog	NW	Tuscan
488	Frosty White	UW	Urban
461	Graphite	419	Wallaby
HN2	Honey 2	WL	Willow

GALLERY VINYL SOFTENED RIM

Grade 1	– 5% upcharge
G1001	Citadel
G1011	Pepperdust
Grade 2	- 6% upcharge
G1002	Planked Raw Oa
G1003	Evening Notte
G1004	Kirsche
G1005	Midnight Run
G1006	Sepia Walnut
G1007	Serotina
G1008	Timeless
G1009	White Nebbia
G1012	Phantom Ecru

LAMINATE WORKSURFACES AND TFL MODESTY

WOO	DGRAIN LAM	IINATE		SOLID LAMINATE			GALLERY LAMINATE	MODESTY PANEL RESIN
793 AD MC	Acorn Almond Amber	MW MH YO	Midtown Mocha Monterey	462 Cinder 492 Cinder Linear 440 Cloud	488 461 478	Frosty White Graphite Platinum Grey	Grade 1 – 5% upcharge G1001 Citadel G1011 Pepperdust	Grade 1 1677 Frosted
AC2 BZ IM CO CL	Autumn 2 Brazilwood Brighton Canyon Caramel Chai	NM PC PT PB 792 SC	Natural Porcini Portico Portobello Sable Sedona	457 Dapple 405 Designer White 491 Designer White Linea 450 Fog	425 460 ar 419	Shadow Storm Wallaby	Grade 2 - 6% upcharge G1002 Planked Raw Oa G1003 Evening Notte G1004 Kirsche G1005 Midnight Run G1006 Sepia Walnut	k
CC CW DF HN2 TM DW KN	Cordoba Cordovan Driftwood Honey 2 Huntington Judicial Kona	SK TW TF NW UW WL	Skyline Tribeca Truffle Tuscan Urban Willow	818 Crisp Linen 821 Elemental Concrete 819 Flex Gauze 822 Smoke Quarstone 814 White Tigris • Pattern laminates not ava-	ilable on	TFL models	G1007 Serotina G1008 Timeless G1009 White Nebbia G1012 Phantom Ecru	

CSL available on HPL worksurfaces only

METAL BASE PAINT COLORS

462	Cinder
405	Designer White
501	Platinum Metallic

PREMIUM*

*10% List Upcharge

111 440 106 107 450 488 113	Apricot Orange Cloud Cloud Blue Dark Blue Fog Frosty White Golden Rod	420 425 544 105 460 112 419	Sandstone Shadow Silver Pearl Spinach Gree Storm Tango Red Wallaby
461	Graphite		

PRIVACY SCREEN VERTICAL TEXTILE OPTIONS

Grade A Compose	Grade B Basket
Crossroads	Frenzied
Dune	Fuse
Fusion	Linen
Infuse	Lyko
Meander	Pact
Merge	Prose
Mykel	Savile
Plinth	
Repetition	
Tapestry	COM (Grade B)
Universe	

[•] See the Surface Materials Reference Guide for a complete overview of the surface materials program. It is located with our price lists on www.kimballinternational.com

FACTORY INSTALLED GROMMET OPTIONS

If no grommet is desired, specify an X (No Grommet)

Round Grommet, Black Plastic

\$40 list for each grommet

G1L Left
G1R Right
G1LR Left & Right
G1C Center
G1LC Left & Center
G1RC Right & Center
G1A Left, Right & Center



Racetrack Grommet, Satin Nickel Metallic

\$45 list for each grommet

0110111	
G11SNL	Left
G11SNR	Right
G11SNLR	Left & Right
G11SNC	Center
G11SNLC	Left & Center
G11SNRC	Right & Center
G11SNA	Left, Right & Cente

Racetrack Grommet, Platinum Metallic

\$45 list for each grommet


G11PLL Left
G11PLR Right
G11PLLR Left & Right
G11PLC Center
G11PLC Left & Center
G11PLRC Right & Center
G11PLA Left, Right & Center


IMPORTANT: Grommets are not available for worksurfaces on single column H-base.

CUT OUT	DESIGNATOR	UPCHARGE
G12	CUT-G12C	\$40
G17	CUT-G17C	\$40
G33	CUT-G33C	\$40




Rectangular






Curved Corner

Extended Cove





Racetrack Grommet,

\$45 list for each grommet

Right

Center

Left & Right

Left & Center

Right & Center

Left, Right & Center

Cinder

G11MBL

G11MBR


G11MBLR

G11MBC

G11MBLC

G11MBRC

G11MBA



. |I37/8"

Note: All dimensions for grommets are measured from the center of the grommet to the worksurface edge. Grommets are specified separately for the main and return worksurfaces on L models

FACTORY INSTALLED CUTOUT



G12

3 configurations available available in Black, Silver, & White sold separately in Accessories Section



G17

3 configuration available available in Black, Silver, & White sold separately in Accessories Section



G33

available in Black, Silver, & White sold separately in Accessories Section


CUTOUT LOCATIONS




Rectangular




Extended Straight



Curved Corner



Extended Cove



L Worksurface Main and Return

- · Base includes control box, 9' power cord, and standard up/down control switch
- · Worksurfaces must be specified separately; see
- · Base ships ready to assemble

TO ORDER, SPECIFY:

SAMPLE MODEL NUMBER:

1. Model Number

2. Paint

65N41ABSTP 501

• See pages 313-315 for all options available in Naviyd

				LIST	DI	MENSION	IS			CARTONED	CUBIC
	MODEL NO./DES	CRIPTION		PRICE	D	W	Н	Α	KW	WEIGHT	FEET
T-LEG STANDARD HEIGHT	65N41ABSTP	Paint	9	1476	23%	40¾-64¾	24¾-4	11/8	-	61 lbs.	2.7
ADJUSTABLE BASE											



- Maximum surface weight with caster option is 130 pounds
- Caster options listed on page 336
 Standard height adjustable 24¼"-41½"
- Black plastic glides are standard; 2" diameter and adjustable range ½"
- · Memory control and programmable switches available; see page 336
- Pedestals, overhead storage or components should not be installed in the path of the height adjustable desks
- Frames are adjustable in 6" increments
- Base feet are 23%" deep

T-LEG EXTENDED HEIGHT ADJUSTABLE BASE



- 65N47ABETP \$ 1780 65 lbs. 2.7 Paint 23% 40¾-64¾ 21¾-47¼
- Maximum surface weight with caster option is 130 pounds
 Caster options listed on page 336

- Extended height adjustable 21%"-47%"
 Black plastic glides are standard; 2" diameter and adjustable range ½"
 Memory control and programmable switches available; see page 336
- · Pedestals, overhead storage or components should not be installed in the path of the height adjustable desks
- Frames are adjustable in 6" increments
- · Base feet are 23%" deep

114.01 lbs.

4.17

PRODUCT SPECIFICATIONS

- · Base includes control box, 9' power cord, and standard up/down control switch
- · Worksurfaces must be specified separately; see page 310
- · Base ships ready to assemble

TO ORDER, SPECIFY:

SAMPLE MODEL NUMBER:

1. Model Number 2. Paint

65N41ABLSTP 501


• See pages 313-315 for all options available in Naviyd

47-71 52¾-64¾ 21%-47¼

	LIST	DIMENSIONS		CARTONED CUBIC
MODEL NO./DESCRIPTION	PRICE	D W H A	KW	WEIGHT FEET
65N41ABLSTP Paint	\$ 2350	47-71 52¾-64¾ 24¾-41%	-	114.01 lbs. 4.17

\$ 2504

T-LEG | L-CONFIGURATION STANDARD HEIGHT **ADJUSTABLE BASE**



- Standard height adjustable 24¼"-41½" Black plastic glides are standard; 2" diameter and adjustable range ½"
- Memory control and programmable switches available; see page 336
- · Pedestals, overhead storage or components should not be installed in the path of the height adjustable desks
- Frames are adjustable in 6" increments
- · Available to be paired with rectangular main and return, extended straight and cove worksurfaces
- Base feet are 23%" deep

65N47ABLETP

T-LEG | L-CONFIGURATION EXTENDED HEIGHT **ADJUSTABLE BASE**



• Extended height adjustable 21%"-47¼"

Paint

- Black plastic glides are standard; 2" diameter and adjustable range ½"
 Memory control and programmable switches available; see page 336
- · Pedestals, overhead storage or components should not be installed in the path of the height adjustable desks
- Frames are adjustable in 6" increments
- · Available to be paired with rectangular main and return, extended straight and cove worksurfaces
- · Base feet are 23%" deep

- Base includes control box, 9' power cord, and standard up/down control switch
- Rectangular worksurface only; must be specified separately; see page 310
- · Base ships ready to assemble

TO ORDER, SPECIFY:

SAMPLE MODEL NUMBER:

1. Model Number

2. Paint

65N41ABSCP 501

• See pages 313-315 for all options available in Naviyd

23% 40%-64% 21%-47%

65 lbs.

2.7

				LIST	DI	MENSION	IS			CARTONED	CUBIC
	MODEL NO./DESC	CRIPTION		PRICE	D	W	Н	Α	KW	WEIGHT	FEET
C-LEG STANDARD HEIGHT	65N41ABSCP	Paint	Ş	1623	23%	40¾-64¾	24¾-4	11/8	-	61 lbs.	2.7
ADJUSTABLE BASE	04	-l:+- - - 0.43/" 411/"								•	

C-A



- Standard height adjustable 24¾"-41½"
 Black plastic glides are standard; 2" diameter and adjustable range ½"
 Memory control and programmable switches available; see page 336
- Pedestals, overhead storage or components should not be installed in the path of the height adjustable desks
- Frames are adjustable in 6" increments
- · Screens are not to be paired with this unit due to tipping hazard

Paint

C-LEG EXTENDED HEIGHT ADJUSTABLE BASE



65N47ABECP

- Extended height adjustable 21%"-47½"
 Black plastic glides are standard; 2" diameter and adjustable range ½"
 Memory control and programmable switches available; see page 336
 Pedestals, overhead storage or components should not be installed in the path of the height adjustable desks
 Frames are adjustable in 6" increments
 Screens are not to be paired with this unit due to tipping hazard

\$ 1958

- Base includes control box, 9' power cord, and standard up/down control switch
- Worksurfaces must be specified separately; see page 310
- Base ships ready to assemble

TO ORDER, SPECIFY:

SAMPLE MODEL NUMBER:

1. Model Number

2. Paint

65N41ABSHP 501

			LIST DIMENSIONS						CARTONED C				
MODEL NO./DESC	CRIPTION	I	PRICE	D	W	Н	Α	KW	WEIGHT	FEET			
65N41ABSHP	Paint	\$	1275	23%	33½	24¾-4	11%	-	50 lbs.	4.5			





- Standard height adjustable 24¾"-41½"
 Black plastic glides are standard; 2" diameter and adjustable range ½"
 Memory control and programmable switches available; see page 336
 Pedestals, overhead storage or components should not be installed in the path of the height adjustable tables
- · Fixed frame width
- Can be paired with 23" D x 36" W or 23" D x 42" W rectangular main worksurfaces only

- 3mm rim on all 4 sides of worksurfaces
- Grain direction runs with the width of the surface
- Refer to page 314 for grommet locations and
- See pages 725-767 for accessoriesBase selection must be specified separately; see pages 316-319 for base options

TO ORDER, SPECIFY:

- 1. Model Number
- 2. Rim Color

MODEL NO./DESCRIPTION

- 3. Grommet/Cutout Option
- 4. Laminate Color

SAMPLE MODEL NUMBER:

65N2971WSSLL 405 G1L 405

DIMENSIONS

W

Н

Α

KW

• See pages 313-315 for all options available in Naviyd

CARTONED CUBIC

FEET

WEIGHT

RECTANGULAR MAIN WORKSURFACE 29" DEEP



65N2971WSSL	HPL	\$ 899	29	71%	1¾16	-	-	79.57 lbs.	3.31
65N2971WSSLL	TFL	674	29	71%	1%	-	-	79.57 lbs.	3.31
65N2965WSSL	HPL	\$ 875	29	65%	1¾16	-	-	66.90 lbs.	3.05
65N2965WSSLL	TFL	651	29	65%	11/8	-	-	66.90 lbs.	3.05
65N2959WSSL	HPL	\$ 723	29	59%	1¾16	-	-	66.29 lbs.	2.79
65N2959WSSLL	TFL	560	29	59%	11/8	-	-	66.29 lbs.	2.79
65N2953WSSL	HPL	\$ 696	29	53%	1¾16	_	_	56.10 lbs.	2.57
65N2953WSSLL	TFL	519	29	53%	11/8	-	-	56.10 lbs.	2.57
65N2947WSSL	HPL	\$ 630	29	47%	1¾16	_	_	53.36 lbs.	2.27
65N2947WSSLL	TFL	473	29	47%	11/8	-	-	53.36 lbs.	2.27

LIST

PRICE

D

RECTANGULAR MAIN WORKSURFACE 23" DEEP



65N2371WSSL	HPL	\$ 768	23	71%	1¾16	-	_	63.93 lbs.	2.74
65N2371WSSLL	TFL	569	23	71%	1%	_	-	63.93 lbs.	2.74
65N2365WSSL	HPL	\$ 746	23	65%	1¾16	_	_	53.70 lbs.	2.53
65N2365WSSLL	TFL	555	23	65%	11/8	-	-	53.70 lbs.	2.53
65N2359WSSL	HPL	\$ 643	23	59%	1¾16	_	_	53.26 lbs.	2.31
65N2359WSSLL	TFL	482	23	59%	11/8	-	-	53.26 lbs.	2.31
65N2353WSSL	HPL	\$ 591	23	53%	1¾16	_	_	44.00 lbs.	2.10
65N2353WSSLL	TFL	442	23	53%	11/8	_	_	44.00 lbs.	2.10
65N2347WSSL	HPL	\$ 533	23	47%	1¾16	_	_	42.88 lbs.	1.90
65N2347WSSLL	TFL	398	23	47%	11/8	-	-	42.88 lbs.	1.90
65N2341WSSL	HPL	\$ 481	23	41%	1¾16	_	_	38.60 lbs.	1.80
65N2341WSSLL	TFL	359	23	41%	11/8	-	-	38.60 lbs.	1.80
65N2335WSSL	HPL	\$ 421	23	35%	1¾6	_	_	32.87 lbs.	1.80
65N2335WSSLL	TFL	317	23	35%	11/8	-	-	32.87 lbs.	1.80

- 3mm rim on all 4 sides of worksurfaces
- Grain direction runs with the depth of the surface (front to back)
- Refer to page 314 for grommet locations and options
- See pages 725-767 for accessoriesPaired with main worksurfaces to create an L-configuration
- Base selection must be specified separately; see pages 316-319 for base options

TO ORDER, SPECIFY:

- 1. Model Number
- 2. Rim Color
- 3. Grommet/Cutout Option
- 4. Laminate Color

SAMPLE MODEL NUMBER:

65N2971WSSLL 405 G1L 405

RECTANGULAR
RECTANGULAR
RETURN WORKSURFACE
23" DEEP



			LIST	DI	MENSIO	NS			CARTONED	CUBIC
MODEL NO./DESCRIPTION		F	PRICE		D W H		Α	KW	WEIGHT	FEET
65N2347WSSVL	HPL	\$	533	23	473/8	1¾16	_	-	44.09 lbs.	2.4
65N2347WSSVLL	TFL		398	23	47%	11/8	-	-	44.09 lbs.	2.4
65N2341WSSVL	HPL	\$	481	23	41¾	1¾16	_	_	38.60 lbs.	2.1
65N2341WSSVLL	TFL		359	23	41%	11/8	_	-	38.60 lbs.	2.1
65N2335WSSVL	HPL	\$	421	23	35%	1¾16	_	_	32.87 lbs.	1.8
65N2335WSSVLL	TFL		317	23	35%	11/8	-	-	32.87 lbs.	1.8

^{• 23&}quot; deep non-handed return worksurfaces; can be set up as right or left return

- 3mm rim on all sides of worksurfaces
- Grain direction runs diagonally
 Refer to page 314 for grommet locations and options
- 120° curved corner surfaces can be paired with T-leg bases only; see pages 316-317
 See pages 725-767 for accessories

TO ORDER, SPECIFY:

- 1. Model Number
- Rim Color
 Grommet/Cutout Option
 Laminate Color

SAMPLE MODEL NUMBER:

65N4747WSCYCLL2 405 G1C 405

		LIST	DIN	MENSIC	NS			CARTONED	CUBIC
	MODEL NO./DESCRIPTION	PRICE	D	W	Н	Α	KW	WEIGHT	FEET
120° CURVED CORNER	65N4747WSCYCL2 HPL	\$ 1461	43%	82	1¾16	-	-	149 lbs.	5.42
WORKSURFACE	65N4747WSCYCLL2 TFL	1319	43%	82	11/8	_	-	149 lbs.	5.42





- 3mm rim on all sides of worksurfaces
- Grain direction runs with the width of the surface
- Refer to page 314 for grommet locations and
- Not intended to be paired with a returnSee pages 725-767 for accessories

TO ORDER, SPECIFY:

- 1. Model Number
- 2. Rim Color
- 3. Grommet/Cutout Option
- 4. Laminate Color

SAMPLE MODEL NUMBER:

65N4771WSCERLL2 405 G1C 405

• See pages 313-315 for all options available in Naviyd

EXTENDED CORNER STRAIGHT WORKSURFACE




MODEL NO./DESCRIPTION		
HPL, Right	\$	1399
TFL, Right		1088
HPL, Left	\$	1399
TFL, Left		1088
	HPL, Right TFL, Right HPL, Left	HPL, Right \$ TFL, Right HPL, Left \$

LIST PRICE	DIN D	MENSIO W	NS H	Α	KW	CARTONED WEIGHT	CUBIC FEET
1399	46%	70%	1¾16	-	-	46.63 lbs.	70.63
1088	46%	70%	11/8	_	-	46.63 lbs.	70.63
1399	46%	70%	1¾16	-	-	46.63 lbs.	70.63
1088	46%	70%	11/8	_	_	46.63 lbs.	70.63


Right shown



Left shown



Right shown



Left shown

EXTENDED	CORNER COVE
STRAIGHT	WORKSURFACE

1088
\$ 1399
1088

4078	7 078	I 716	_		40.03 105.	70.03
46%	70%	11/8	-	-	46.63 lbs.	70.63
46%	70%	1¾16	_	-	46.63 lbs.	70.63
46%	70%	1%	_	_	46 63 lbs	70.63

- · Base includes control box, 9' power cord, and standard up/down control switch
- · Desk ships ready to assemble with appropriate
- · Refer to page 314 for grommet locations and options
- · 3mm rim on all sides of worksurface
- U.L. 1286/962 listed
- · Grain direction runs with the width of the surface

TO ORDER, SPECIFY:

- 1. Model Number
- Rim Color
- 3. Grommet/Cutout Option
- 4. Laminate Color
- 5. Paint

SAMPLE MODEL NUMBER:

65N2971DASTL 405 G1C 405 501

• See pages 313-315 for all options available in Naviyd

CONFIGURED DESKS 29" DEEP RECTANGULAR WORKSURFACE **T-LEG STANDARD HEIGHT ADJUSTABLE BASE**



MODEL NO./DESC	MODEL NO./DESCRIPTION		LIST Price	DI D	MENSIO W	NS H	Α	KW	CARTONED WEIGHT	CUBIC FEET
65N2971DASTL	HPL	\$	2375	29	71%	26-42½		-	140.58 lbs.	6.02
65N2971DASTLL	TFL		2150	29	71¾	26-42½		-	140.58 lbs.	6.02
65N2965DASTL	HPL	\$	2351	29	65%	26-42½		_	127.91 lbs.	5.75
65N2965DASTLL	TFL		2127	29	65%	26-42½		-	127.91 lbs.	5.75
65N2959DASTL	HPL	\$	2200	29	59%	26-42½		_	127.30 lbs.	5.49
65N2959DASTLL	TFL		2036	29	59%	26-42½		_	127.30 lbs.	5.49
65N2953DASTL	HPL	\$	2172	29	53%	26-42½		_	117.11 lbs.	5.27
65N2953DASTLL	TFL		1995	29	53%	26-42½		_	117.11 lbs.	5.27
65N2947DASTL	HPL	\$	2106	29	47%	26-42½		_	114.37 lbs.	4.97
65N2947DASTLL	TFL		1949	29	47%	26-42½		-	114.37 lbs.	4.97

- Maximum surface weight with caster option is 130 pounds
 Caster options listed on page 336
- Standard height adjustable 24¾"-411/8"
- Black plastic glides are standard; 2" diameter and adjustable range 1/2"
- Memory control and programmable switches available; see page 336
- · Pedestals, overhead storage or components should not be installed in the path of the height adjustable desks
- Frames are adjustable in 6" increments
- · Base feet are 23%" deep
- TFL surfaces are 11/8" thick and HPL surfaces are 11/16" thick

CONFIGURED DESKS 23" DEEP RECTANGULAR WORKSURFACE **T-LEG STANDARD HEIGHT ADJUSTABLE BASE**



65N2371DASTL	HPL	\$	2244	23	71%	26-421/2	-	124.94 lbs.	5.44
65N2371DASTLL	TFL		2045	23	71%	26-42½	-	124.94 lbs.	5.44
65N2365DASTL	HPL	\$	2222	23	65%	26-42½	_	114.71 lbs.	5.23
65N2365DASTLL	TFL		2032	23	65%	26-42½	-	114.71 lbs.	5.23
65N2359DASTL	HPL	\$	2119	23	59%	26-42½		114.27 lbs.	5.02
65N2359DASTLL	TFL	· · · · · · · · · · · · · · · · · · ·	1958	23	59%	26-42½	_	114.27 lbs.	5.02
65N2353DASTL	HPL	\$	2067	23	53%	26-42½	_	105.01 lbs.	4.80
65N2353DASTLL	TFL		1918	23	53%	26-42½	-	105.01 lbs.	4.80
65N2347DASTL	HPL	\$	2010	23	47%	26-42½	_	103.89 lbs.	4.60
65N2347DASTLL	TFL		1874	23	47%	26-42½	_	103.89 lbs.	4.60

- Maximum surface weight with caster option is 130 pounds
 Caster options listed on page 336
 Standard height adjustable 24¾*-41¾*

- Black plastic glides are standard; 2" diameter and adjustable range ½"
- Memory control and programmable switches available; see page 336
 Pedestals, overhead storage or components should not be installed in the path of the height adjustable desks
- · Frames are adjustable in 6" increments
- Base feet are 23%" deep
- TFL surfaces are 11/8" thick and HPL surfaces are 11/16" thick

- · Base includes control box, 9' power cord, and standard up/down control switch
- · Desk ships ready to assemble with appropriate hardware
- · Refer to page 314 for grommet locations and options
- · 3mm rim on all sides of worksurface
- · U.L. 1286/962 listed
- · Grain direction runs with the width of the surface

TO ORDER, SPECIFY:

- 1. Model Number
- 2. Rim Color
- 3. Grommet/Cutout Option
- 4. Laminate Color
- 5. Paint

SAMPLE MODEL NUMBER:

65N2971DAETL 405 G1C 405 501

• See pages 313-315 for all options available in Naviyd

CONFIGURED DESKS 29" DEEP RECTANGULAR WORKSURFACE **T-LEG EXTENDED HEIGHT ADJUSTABLE BASE**



MODEL NO./DESC	DIDTION		LIST PRICE	DI D	MENSIO W	NS H A	KW	CARTONED WEIGHT	CUBIC FEET
							LVAA		
65N2971DAETL	HPL	\$	2679	29	71%	22½-48½	_	144.58 lbs.	6.02
65N2971DAETLL	TFL		2454	29	71%	22½-48½	_	144.58 lbs.	6.02
65N2965DAETL	HPL	\$	2654	29	65%	22½-48½	_	131.91 lbs.	5.75
65N2965DAETLL	TFL		2431	29	65%	22½-48½	-	131.91 lbs.	5.75
65N2959DAETL	HPL	\$	2503	29	59%	22½-48½	_	131.30 lbs.	5.49
65N2959DAETLL	TFL		2339	29	59%	22½-48½	-	131.30 lbs.	5.49
65N2953DAETL	HPL	\$	2476	29	53%	22½-48½	_	121.11 lbs.	5.27
65N2953DAETLL	TFL		2298	29	53%	22½-48½	-	121.11 lbs.	5.27
65N2947DAETL	HPL	\$	2410	29	47%	22½-48½	_	118.37 lbs.	4.97
65N2947DAETLL	TFL	Ť	2252	29	47%	22½-48½	_	118.37 lbs.	4.97

- Maximum surface weight with caster option is 130 pounds
 Caster options listed on page 336
 Extended height adjustable 21%"-47%"

- Black plastic glides are standard; 2" diameter and adjustable range ½"
 Memory control and programmable switches available; see page 336
 Pedestals, overhead storage or components should not be installed in the path of the height adjustable desks
- Frames are adjustable in 6" increments
 Base feet are 23%" deep
- TFL surfaces are 1½" thick and HPL surfaces are 1½" thick

CONFIGURED DESKS 23" DEEP RECTANGULAR WORKSURFACE **T-LEG EXTENDED HEIGHT ADJUSTABLE BASE**



65N2371DAETL	HPL	\$	2547	23	71%	22½-48½	-	128.94 lbs.	5.44
65N2371DAETLL	TFL		2349	23	71%	221/2-481/2	-	128.94 lbs.	5.44
65N2365DAETL	HPL	\$	2525	23	65%	221/2-481/2	-	118.71 lbs.	5.23
65N2365DAETLL	TFL		2335	23	65%	221/2-481/2	-	118.71 lbs.	5.23
65N2359DAETL	HPL	\$	2422	23	59%	221/2-481/2	-	118.27 lbs.	5.02
65N2359DAETLL	TFL		2262	23	59%	22½-48½	-	118.27 lbs.	5.02
65N2353DAETL	HPL	\$	2371	23	53%	22½-48½		109.01 lbs.	4.80
65N2353DAETLL	TFL		2222	23	53%	22½-48½	_	109.01 lbs.	4.80
65N2347DAETL	HPL	\$	2313	23	47%	22½-48½	_	107.89 lbs.	4.60
65N2347DAETLL	TFL	<u> </u>	2178	23	47%	221/2-481/2	_	107.89 lbs.	4.60

- Maximum surface weight with caster option is 130 pounds
- Caster options listed on page 336
 Extended height adjustable 21%"-47%"
- Black plastic glides are standard; 2" diameter and adjustable range ½"
- Memory control and programmable switches available; see page 336
- Pedestals, overhead storage or components should not be installed in the path of the height adjustable desks
 Frames are adjustable in 6" increments
- Base feet are 23%" deep
- TFL surfaces are 11/8" thick and HPL surfaces are 13/16" thick

- Base includes control box, 9' power cord, and standard up/down control switch
- Desk ships ready to assemble with appropriate hardware.
- Refer to page 314 for grommet locations and options
- · 3mm rim on all sides of worksurface
- U.L. 1286/962 listed
- · Grain direction runs with the width of the surface

TO ORDER, SPECIFY:

- 1. Model Number
- 2. Rim Color
- 3. Grommet/Cutout Option
- 4. Laminate Color
- 5. Paint

SAMPLE MODEL NUMBER:

65N2971DASCL 405 G1C 405 501

• See pages 313-315 for all options available in Naviyd

CONFIGURED DESKS
29" DEEP RECTANGULAR
WORKSURFACE
C-LEG STANDARD HEIGHT
ADJUSTABLE BASE



		LIST	DI	MENSIO	NS		CARTONED	CUBIC
MODEL NO./DESC	RIPTION	PRICE	D	W	H A	. KW	WEIGHT	FEET
65N2971DASCL	HPL	\$ 2522	29	71%	26-42½	-	140.58 lbs.	6.02
65N2971DASCLL	TFL	2297	29	71%	26-42½	-	140.58 lbs.	6.02
65N2965DASCL	HPL	\$ 2498	29	65%	26-42½	_	127.91 lbs.	5.75
65N2965DASCLL	TFL	2274	29	65%	26-42½	_	127.91 lbs.	5.75
65N2959DASCL	HPL	\$ 2347	29	59%	26-42½	_	127.30 lbs.	5.49
65N2959DASCLL	TFL	2183	29	59%	26-42½	-	127.30 lbs.	5.49
65N2953DASCL	HPL	\$ 2319	29	53%	26-42½	_	117.11 lbs.	5.27
65N2953DASCLL	TFL	2142	29	53%	26-42½	-	117.11 lbs.	5.27
65N2947DASCL	HPL	\$ 2253	29	47%	26-42½	_	114.37 lbs.	4.97
65N2947DASCLL	TFL	2096	29	47%	26-42½	_	114.37 lbs.	4.97

- Not compatible with monitor arms, privacy screens or casters due to tip hazard
- Standard height adjustable 24¾"-41%"
- Black plastic glides are standard; 2" diameter and adjustable range ½"
- Memory control and programmable switches available; see page 336
- · Pedestals, overhead storage or components should not be installed in the path of the height adjustable desks
- Frames are adjustable in 6" increments
- · Base feet are 23%" deep
- TFL surfaces are 1%" thick and HPL surfaces are 13/16" thick

CONFIGURED DESKS
23" DEEP RECTANGULAR
WORKSURFACE
C-LEG STANDARD HEIGHT
ADJUSTABLE BASE



65N2371DASCL	HPL	\$ 2391	23	71%	26-42½	-	124.94 lbs.	5.44
65N2371DASCLL	TFL	2192	23	71%	26-42½	_	124.94 lbs.	5.44
65N2365DASCL	HPL	\$ 2369	23	65%	26-42½	-	114.71 lbs.	5.23
65N2365DASCLL	TFL	2179	23	65%	26-42½	-	114.71 lbs.	5.23
65N2359DASCL	HPL	\$ 2266	23	59%	26-42½	-	114.27 lbs.	5.02
65N2359DASCLL	TFL	2105	23	59%	26-42½	-	114.27 lbs.	5.02
65N2353DASCL	HPL	\$ 2214	23	53%	26-42½	-	105.01 lbs.	4.80
65N2353DASCLL	TFL	2065	23	53%	26-42½	_	105.01 lbs.	4.80
65N2347DASCL	HPL	\$ 2157	23	47%	26-42½	_	103.89 lbs.	4.60
65N2347DASCLL	TFL	2021	23	47¾	26-42½	_	103.89 lbs.	4.60

- Not compatible with monitor arms, privacy screens or casters due to tip hazard
- Standard height adjustable 24¾"-41%"
- Black plastic glides are standard; 2" diameter and adjustable range ½"
- Memory control and programmable switches available; see page 336
- · Pedestals, overhead storage or components should not be installed in the path of the height adjustable desks
- Frames are adjustable in 6" increments
- · Base feet are 23%" deep
- TFL surfaces are 1½" thick and HPL surfaces are 1½6" thick

- Base includes control box, 9' power cord, and standard up/down control switch
- Desk ships ready to assemble with appropriate hardware
- Refer to page 314 for grommet locations and options
- 3mm rim on all sides of worksurface
- · U.L. 1286/962 listed
- · Grain direction runs with the width of the surface

TO ORDER, SPECIFY:

- 1. Model Number
- 2. Rim Color
- 3. Grommet/Cutout Option
- 4. Laminate Color
- 5. Paint

SAMPLE MODEL NUMBER:

65N2971DAECL 405 G1C 405 501

• See pages 313-315 for all options available in Naviyd

CONFIGURED DESKS
29" DEEP RECTANGULAR
WORKSURFACE
C-LEG EXTENDED HEIGHT
ADJUSTABLE BASE



		LIST	DI	MENSIO	NS		CARTONED	CUBIC
MODEL NO./DESC	RIPTION	PRICE	D	W	H A	KW	WEIGHT	FEET
65N2971DAECL	HPL	\$ 2857	29	71¾	22½-48½	-	144.58 lbs.	6.02
65N2971DAECLL	TFL	2632	29	71%	22½-48½	_	144.58 lbs.	6.02
65N2965DAECL	HPL	\$ 2833	29	65%	22½-48½	_	131.91 lbs.	5.75
65N2965DAECLL	TFL	2609	29	65%	22½-48½	_	131.91 lbs.	5.75
65N2959DAECL	HPL	\$ 2682	29	59%	22½-48½	_	131.30 lbs.	5.49
65N2959DAECLL	TFL	2518	29	59%	22½-48½	_	131.30 lbs.	5.49
65N2953DAECL	HPL	\$ 2654	29	53%	22½-48½	_	121.11 lbs.	5.27
65N2953DAECLL	TFL	2477	29	53%	22½-48½	-	121.11 lbs.	5.27
65N2947DAECL	HPL	\$ 2588	29	47%	22½-48½		118.37 lbs.	4.97
65N2947DAECLL	TFL	2431	29	47%	22½-48½	_	118.37 lbs.	4.97

- Not compatible with monitor arms, privacy screens or casters due to tip hazard
- Extended height adjustable 21%"-47¼"
- Black plastic glides are standard; 2" diameter and adjustable range 1/2"
- Memory control and programmable switches available; see page 336
- · Pedestals, overhead storage or components should not be installed in the path of the height adjustable desks
- Frames are adjustable in 6" increments
- · Base feet are 23%" deep
- TFL surfaces are 11/8" thick and HPL surfaces are 11/16" thick

CONFIGURED DESKS 23" DEEP RECTANGULAR WORKSURFACE C-LEG EXTENDED HEIGHT ADJUSTABLE BASE



65N2371DAECL	HPL	\$ 2726	23	71%	22½-48½	_	128.94 lbs.	5.44
65N2371DAECLL	TFL	2527	23	71%	22½-48½	-	128.94 lbs.	5.44
65N2365DAECL	HPL	\$ 2704	23	65%	22½-48½	-	118.71 lbs.	5.23
65N2365DAECLL	TFL	2514	23	65%	22½-48½	-	118.71 lbs.	5.23
65N2359DAECL	HPL	\$ 2601	23	59%	22½-48½	-	118.27 lbs.	5.02
65N2359DAECLL	TFL	2440	23	59%	22½-48½	-	118.27 lbs.	5.02
65N2353DAECL	HPL	\$ 2549	23	53%	22½-48½		109.01 lbs.	4.80
65N2353DAECLL	TFL	2400	23	53%	22½-48½	-	109.01 lbs.	4.80
65N2347DAECL	HPL	\$ 2492	23	47%	22½-48½	-	107.89 lbs.	4.60
65N2347DAECLL	TFL	2356	23	47%	22½-48½	_	107.89 lbs.	4.60

- Not compatible with monitor arms, privacy screens or casters due to tip hazard
- Extended height adjustable 21%"-47¼"
- Black plastic glides are standard; 2" diameter and adjustable range ½"
- Memory control and programmable switches available; see page 336
- Pedestals, overhead storage or components should not be installed in the path of the height adjustable desks
- Frames are adjustable in 6" increments
- · Base feet are 23%" deep
- TFL surfaces are 11/8" thick and HPL surfaces are 13/16" thick

- Base includes control box, 9' power cord, and standard up/down control switch
- Desk ships ready to assemble with appropriate hardware
- Refer to page 314 for grommet locations and options
- 3mm rim on all sides of worksurface
- U.L. 1286/962 listed
- Grain direction runs with the width of the surface

TO ORDER, SPECIFY:

- 1. Model Number
- 2. Rim Color
- 3. Grommet/Cutout Option
- 4. Laminate Color
- 5. Paint

SAMPLE MODEL NUMBER:

65N2342DASHL 405 G1C 405 501

			LIST	DI	MENSIC	NS			CARTONED	CUBIC
	MODEL NO./DESCF	RIPTION	PRICE	D	W	Н	Α	KW	WEIGHT	FEET
CONFIGURED DESKS	65N2342DASHL	HPL	\$ 1756	23	42	26-421/4		-	87.55 lbs.	6.18
23" DEEP RECTANGULAR WORKSURFACE SINGLE-COLUMN H	65N2342DASHLL	TFL	1634	23	42	26-421/4		-	87.55 lbs.	6.18
STANDARD HEIGHT ADJUSTABLE BASE	65N2336DASHL	HPL	\$ 1696	23	36	26-421/4		-	82.22 lbs.	5.97
	65N2336DASHLL	TFL	1592	23	36	26-421/4		-	82.22 lbs.	5.97



- Standard height adjustable 24%"-41%"
 Black plastic glides are standard; 2" diameter and adjustable range %"
 Memory control and programmable switches available; see page 336
 Pedestals, overhead storage or components should not be installed in the path of the height adjustable desks
- Fixed frame width
 Can be paired with 23" D x 36" W or 23" D x 42" W rectangular main worksurfaces only

- · Base includes control box, 9' power cord, and standard up/down control switch
- · Desk ships ready to assemble with appropriate hardware
- · Refer to page 314 for grommet locations and options
- · 3mm rim on all sides of worksurface
- U.L. 1286/962 listed
- · Grain direction runs with the width of the main surface and the depth of return surface
- 23" wide non-handed return worksurfaces; can be set up as right or left return

TO ORDER, SPECIFY:


- 1. Model Number
- 2. Rim Color
- 3. Grommet/Cutout Option
- 4. Laminate Color
- 5. Paint

SAMPLE MODEL NUMBER:

65N297171DALSTL 405 G1C 405 501

• See pages 313-315 for all options available in Naviyd

CONFIGURED DESKS MAIN & RETURN WORKSURFACE T-LEG | L-CONFIGURATION STANDARD HEIGHT **ADJUSTABLE BASE**



MODEL NO./DESCRI	IPTION	1	LIST PRICE		NSIONS W H	Α	KW	CARTONED WEIGHT	CUBIC FEET
29" DEEP MAIN SUF 72" WIDE	RFACE			OVERAL D	L RETURN W	MAIN W	н		
65N297171DALSTL	HPL	\$	3887	71%	42%	71%	26-421/4	231.12 lbs.	9.15
65N297171DALSTLL	TFL		3527	71%	42%	71%	26-421/4	231.12 lbs.	9.15
65N296571DALSTL	HPL	\$	3863	65%	36%	71%	26-421/4	225.79 lbs.	8.94
65N296571DALSTLL	TFL		3504	65%	36%	71%	26-421/4	225.79 lbs.	8.94
60" WIDE									
65N297159DALSTL	HPL	\$	3775	71%	423/8	59%	26-421/4	217.84 lbs.	8.63
65N297159DALSTLL	TFL		3446	71%	42%	59%	26-421/4	217.84 lbs.	8.63
65N296559DALSTL	HPL	\$	3751	65%	36%	59%	26-421/4	212.51 lbs.	8.42
65N296559DALSTLL	TFL		3423	65%	36¾	59%	26-421/4	212.51 lbs.	8.42

- Standard height adjustable 24¾"-41½"
 Black plastic glides are standard; 2" diameter and adjustable range ½"
 Memory control and programmable switches available; see page 336
 Pedestals, overhead storage or components should not be installed in the path of the height adjustable desks
- Frames are adjustable in 6" increments
 Base feet are 23%" deep
- TFL surfaces are 11/8" thick and HPL surfaces are 11/16" thick

- Base includes control box, 9' power cord, and standard up/down control switch
- Desk ships ready to assemble with appropriate hardware
- · Refer to page 314 for grommet locations and options
- 3mm rim on all sides of worksurface
- · U.L. 1286/962 listed
- Grain direction runs with the width of the main surface and the depth of return surface
- 23" wide non-handed return worksurfaces; can be set up as right or left return


TO ORDER, SPECIFY:

- 1. Model Number
- Rim Color
- 3. Grommet/Cutout Option
- 4. Laminate Color
- 5. Paint

SAMPLE MODEL NUMBER:

65N237171DALSTL 405 G1C 405 501

CONFIGURED DESKS
MAIN & RETURN WORKSURFACE
T-LEG L-CONFIGURATION
STANDARD HEIGHT
ADJUSTABLE BASE
(CONTINUED)



MODEL NO./DESCR	PTION	LIST		NSIONS W H	Α	KW	CARTONED WEIGHT	CUBIC FEET
23" DEEP MAIN SUI 72" WIDE	RFACE		OVERALL D	. RETURN W	MAIN W	н		
65N237171DALSTL	HPL	\$ 3756	71%	48%	71%	26-421/4	221.51 lbs.	8.78
65N237171DALSTLL	TFL	3422	71%	48%	71%	26-421/4	221.51 lbs.	8.78
65N236571DALSTL	HPL	\$ 3734	65%	42%	71%	26-421/4	215.48 lbs.	8.58
65N236571DALSTLL	TFL	3408	65%	423/8	71%	26-421/4	215.48 lbs.	8.58
65N235971DALSTL	HPL	\$ 3631	59%	36%	71%	26-421/4	210.15 lbs.	8.37
65N235971DALSTLL	TFL	3335	59%	36%	71%	26-421/4	210.15 lbs.	8.37
60" WIDE								
65N237159DALSTL	HPL	\$ 3644	713/8	48¾	59%	26-421/4	210.84 lbs.	8.36
65N237159DALSTLL	TFL	3341	71%	48%	59%	26-421/4	210.84 lbs.	8.36
65N236559DALSTL	HPL	\$ 3621	65%	42%	59%	26-421/4	204.81 lbs.	8.15
65N236559DALSTLL	TFL	3327	65%	42%	59%	26-421/4	204.81 lbs.	8.15
65N235959DALSTL	HPL	\$ 3519	59%	36%	59%	26-421/4	199.48 lbs.	7.94
65N235959DALSTLL	TFL	3254	59%	36%	59%	26-421/4	199.48 lbs.	7.94

- Standard height adjustable 24¾"-41%"

- Black plastic glides are standard; 2" diameter and adjustable range %"
 Memory control and programmable switches available; see page 336
 Pedestals, overhead storage or components should not be installed in the path of the height adjustable desks
- · Frames are adjustable in 6" increments
- Base feet are 23%" deep
- TFL surfaces are 1%" thick and HPL surfaces are 1%6" thick

- · Base includes control box, 9' power cord, and standard up/down control switch
- · Desk ships ready to assemble with appropriate hardware
- · Refer to page 314 for grommet locations and options
- · 3mm rim on all sides of worksurface
- U.L. 1286/962 listed
- Grain direction runs with the width of the main surface and the depth of return surface
- 23" wide non-handed return worksurfaces; can be set up as right or left return

TO ORDER, SPECIFY:


- 1. Model Number
- 2. Rim Color
- 3. Grommet/Cutout Option
- 4. Laminate Color
- 5. Paint

SAMPLE MODEL NUMBER:

65N297171DALETL 405 G1C 405 501

• See pages 313-315 for all options available in Naviyd

CONFIGURED DESKS MAIN & RETURN WORKSURFACE T-LEG | L-CONFIGURATION **EXTENDED HEIGHT ADJUSTABLE BASE**



			LIST	DIM	IENSIONS			CARTONED	CUBIC
MODEL NO./DESCRI	PTION	1	PRICE	D	W H	Α	KW	WEIGHT	FEET
29" DEEP MAIN SUF 72" WIDE	RFACE			OVERA D	LL RETURN W	MAIN W	н		
65N297171DALETL	HPL	\$	3936	71%	42%	71%	22½-48½	231.12 lbs.	9.15
65N297171DALETLL	TFL		3576	71%	423/8	71%	22½-48½	231.12 lbs.	9.15
65N296571DALETL	HPL	\$	3912	65%	36¾	71%	22½-48½	225.79 lbs.	8.94
65N296571DALETLL	TFL		3553	65%	36¾	71%	22½-48½	225.79 lbs.	8.94
60" WIDE									
65N297159DALETL	HPL	\$	3824	71%	42%	59%	221/2-481/2	217.84 lbs.	8.63
65N297159DALETLL	TFL		3495	71%	423/8	59%	22½-48½	217.84 lbs.	8.63
65N296559DALETL	HPL	\$	3800	65%	36¾	59%	22½-48½	212.51 lbs.	8.42
65N296559DALETLL	TFL		3472	65%	36%	59%	22½-48½	212.51 lbs.	8.42

- Extended height adjustable 21¾"-47¼"
 Black plastic glides are standard; 2" diameter and adjustable range ½"
 Memory control and programmable switches available; see page 336
 Pedestals, overhead storage or components should not be installed in the path of the height adjustable desks
- Frames are adjustable in 6" increments
 Base feet are 23%" deep
- TFL surfaces are 11/8" thick and HPL surfaces are 11/16" thick


- Base includes control box, 9' power cord, and standard up/down control switch
- Desk ships ready to assemble with appropriate hardware
- · Refer to page 314 for grommet locations and options
- 3mm rim on all sides of worksurface
- · U.L. 1286/962 listed
- Grain direction runs with the width of the main surface and the depth of return surface
- 23" wide non-handed return worksurfaces; can be set up as right or left return

TO ORDER, SPECIFY:

- 1. Model Number
- Rim Color
- 3. Grommet/Cutout Option
- 4. Laminate Color
- 5. Paint

SAMPLE MODEL NUMBER:

65N237171DALETL 405 G1C 405 501



MODEL NO./DESCRI	PTION	=		NSIONS W H	Α	KW	CARTONED WEIGHT	CUBIC FEET	
23" DEEP MAIN SUF 72" WIDE	RFACE			OVERALL D	RETURN W	MAIN W	н		
65N237171DALETL	HPL	\$	3805	71%	48%	71%	22½-48½	221.51 lbs.	8.78
65N237171DALETLL	TFL		3471	71%	48%	71%	22½-48½	221.51 lbs.	8.78
65N236571DALETL	HPL	\$	3783	65%	42%	71%	22½-48½	215.48 lbs.	8.58
65N236571DALETLL	TFL		3458	65%	42%	71%	22½-48½	215.48 lbs.	8.58
65N235971DALETL	HPL	\$	3680	59%	36%	71%	22½-48½	210.15 lbs.	8.37
65N235971DALETLL	TFL		3384	59%	36%	71%	22½-48½	210.15 lbs.	8.37
60" WIDE									
65N237159DALETL	HPL	\$	3693	71%	48%	59%	22½-48½	210.84 lbs.	8.36
65N237159DALETLL	TFL		3390	71%	48%	59%	22½-48½	210.84 lbs.	8.36
65N236559DALETL	HPL	\$	3671	65%	423/8	59%	22½-48½	204.81 lbs.	8.15
65N236559DALETLL	TFL		3377	65%	42¾	59%	22½-48½	204.81 lbs.	8.15
65N235959DALETL	HPL	\$	3568	59%	36%	59%	22½-48½	199.48 lbs.	7.94
65N235959DALETLL	TFL		3303	59%	36%	59%	22½-48½	199.48 lbs.	7.94

- Extended height adjustable 21%"-47%"

- Black plastic glides are standard; 2" diameter and adjustable range %"
 Memory control and programmable switches available; see page 336
 Pedestals, overhead storage or components should not be installed in the path of the height adjustable desks
- · Frames are adjustable in 6" increments
- Base feet are 23%" deep
- TFL surfaces are 1%" thick and HPL surfaces are 1%6" thick

CARTONED CUBIC

PRODUCT SPECIFICATIONS

- Base includes control box, 9' power cord, and standard up/down control switch
- Desk ships ready to assemble with appropriate hardware
- · Refer to page 314 for grommet locations and options
- · 3mm rim on all sides of worksurface
- U.L. 1286/962 listed
- · Grain direction runs with the width of the surface

TO ORDER, SPECIFY:

- 1. Model Number
- 2. Rim Color
- 3. Grommet/Cutout Option
- 4. Laminate Color
- 5. Paint

SAMPLE MODEL NUMBER:


DIMENSIONS

LIST

65N4771DACERETL2 405 G1C 405 501

	MODEL NO./DESCRIPTION					D	W	Н	Α	KW	WEIGHT	FEET
CONFIGURED DESKS EXTENDED CORNER	EXTENDED HEIGHT LEFT	RIGHT										
STRAIGHT WORKSURFACE T-LEG ADJUSTABLE BASE	65N4771DACELETL2	65N4771DACERETL2	HPL	\$	3903	46%	70%	22½-4	18½	-	213.01 lbs.	9.97
W	65N4771DACELETLL2	65N4771DACERETLL2	TFL		3592	46%	70%	22½-4	18½	-	213.01 lbs.	9.97
23"	STANDARD HEIGHT LEFT	RIGHT										
23"	65N4771DACELSTL2	65N4771DACERSTL2	HPL	\$	3749	46%	70%	26-42	11/4	-	213.01 lbs.	9.97
Left shown	65N4771DACELSTLL2	65N4771DACERSTLL2	TFL		3438	46%	70%	26-42	11/4	_	213.01 lbs.	9.97

- Extended height adjustable 21%"-471/4"
- · Standard height adjustable 24¾"-41%"
- Black plastic glides are standard; 2" diameter and adjustable range 1/2"
- · Memory control and programmable switches available; see page 336
- Pedestals, overhead storage or components should not be installed in the path of the height adjustable desks
 Frames are adjustable in 6" increments
- · Base feet are 23%" deep
- TFL surfaces are 1%" thick and HPL surfaces are 13/6" thick



Right shown

- Base includes control box, 9' power cord, and standard up/down control switch
- Desk ships ready to assemble with appropriate hardware
- Refer to page 314 for grommet locations and options
- 3mm rim on all sides of worksurface
- U.L. 1286/962 listed
- Grain direction runs with the width of the surface


TO ORDER, SPECIFY:

- 1. Model Number
- 2. Rim Color
- 3. Grommet/Cutout Option
- 4. Laminate Color
- 5. Paint


SAMPLE MODEL NUMBER:

65N4771DACVRETL2 405 G1C 405 501

	URED DESKS ED COVE WORKSURFACE
	DJUSTABLE BASE
\	D



Left shown



Right shown

				LIST	DIMENSIONS					CARTONED	CUBIC
MODEL NO./DESCRIPTION			I	PRICE	D	W	Н	Α	KW	WEIGHT	FEET
EXTENDED HEIGHT LEFT	RIGHT										
65N4771DACVLETL2	65N4771DACVRETL2	HPL	\$	3903	46%	70%	22½-	48½	-	213.01 lbs.	9.97
65N4771DACVLETLL2	65N4771DACVRETLL2	TFL		3592	46%	70%	22½-	48½	-	213.01 lbs.	9.97
STANDARD HEIGHT LEFT	RIGHT										
65N4771DACVLSTL2	65N4771DACVRSTL2	HPL	\$	3749	46%	70%	26-42	21/4	-	213.01 lbs.	9.97
65N4771DACVLSTLL2	65N4771DACVRSTLL2	TFI		3438	46%	70%	26-4	21/4	_	213 01 lbs	9 97

- Extended height adjustable 21%"-471/4"
- · Standard height adjustable 24¾"-41%"
- Black plastic glides are standard; 2" diameter and adjustable range ½"
- · Memory control and programmable switches available; see page 336
- · Pedestals, overhead storage or components should not be installed in the path of the height adjustable desks
- Frames are adjustable in 6" increments
- · Base feet are 23%" deep
- TFL surfaces are 11/8" thick and HPL surfaces are 11/16" thick

- · Base includes control box, 9' power cord, and standard up/down control switch
- Desk ships ready to assemble with appropriate hardware
- · Refer to page 314 for grommet locations and options
- 3mm rim on all sides of worksurface
- · U.L. 1286/962 listed
- · Grain direction runs diagonally


TO ORDER, SPECIFY:

- 1. Model Number
- 2. Rim Color
- 3. Grommet/Cutout Option
- 4. Laminate Color
- 5. Paint

SAMPLE MODEL NUMBER:

65N4747DACYCETL2 405 G1C 405 501

CONFIGURED DESKS
120° CURVED CORNER
WORKSURFACE
T-LEG ADJUSTABLE BASE



		LIST	DII	MENSI	ONS		CARTONEI	CUBIC
MODEL NO./DESCRIF	PTION	PRICE	D	W	H A	A K	W WEIGHT	FEET
23" DEEP MAIN WOR EXTENDED HEIGHT	RKSURFACE							
65N4747DACYCETL2	HPL	\$ 3240	42¾	82	26-421/4	-	214.01 lbs.	8.13
65N4747DACYCETLL2	TFL	3099	42%	82	26-421/4	_	214.01 lbs.	8.13
STANDARD HEIGHT								
65N4747DACYCSTL2	HPL	\$ 2937	42¾	82	22½-48½	-	210.01 lbs.	8.13
65N4747DACYCSTLL2	TFL	2795	42%	82	22½-48½	_	210.01 lbs.	8.13

- Extended height adjustable 21½"-47½"
 Standard height adjustable 24½"-41½"
 Black plastic glides are standard; 2" diameter and adjustable range ½"
 Memory control and programmable switches available; see page 336
 Pedestals, overhead storage or components should not be installed in the path of the height adjustable desks
- Frames are adjustable in 6" increments
 Base feet are 23%" deep
- TFL surfaces are 1%" thick and HPL surfaces are 11/16" thick

TO ORDER, SPECIFY:

SAMPLE MODEL NUMBER:

1. Model Number

NAC04MCONB

LICT

• See pages 313-315 for all options available in Naviyd

21/8

1.5 lbs.

0.46

0.1

DIMENSIONS

2

• Refer to planning pages 311-312 for additional information

· Ships with all hardware; field installed

		LIST				NS			CARTONED CUBIC		
	MODEL NO./DESCRIPTION	P	RICE	D	W	Н	Α	KW	WEIGHT	FEET	
MEMORY CONTROL SWITCH	NAC04MCONB	\$	210	21/8	4½	1	_	-	0.1 lbs.	0.10	

· Includes display screen

65NCSTB

- Operates the same as standard up/down switch
- Memory control switch allows the user to set a specific high/low position

BLACK PLASTIC CASTERS

- Brake lever extends from caster, adding $\mbox{\em 34}"$ to depth - Caster adds $\mbox{\em 132}"$ to over-all height of table

Set of 4

- · For use with 23" deep rectangular worksurfaces and T-leg bases only
- When casters are used, maximum weight for desk is 130 pounds

4 POSITION PROGRAMMABLE MEMORY CONTROL FOR ADJUSTABLE HEIGHT UNITS



NAC05PCONB \$ 246 2½ 5½ 3 lbs.

\$

89

1½

- Will allow 4 position programmable option and digital readout.
 To be specified when needing a 4 position memory control on any WaveWorks, Tessera, or Naviyd Height Adjustable Desk models, as these models have a 2 position memory control switch as standard

- See planning pages 311-312 for additional information
- 48" wide includes two mounting brackets;
 54"-72" wide includes three mounting brackets
- · Pairable with rectangular main, extended straight, and cove worksurfaces
- · Attachment hardware included

TO ORDER, SPECIFY:

- 1. Model Number
- 2. Laminate Color (omit for Resin)

SAMPLE MODEL NUMBER:

65N7110MPLL 405

• See pages 313-315 for all options available in Naviyd

RESIN MODESTY PANELS



MODEL NO./DESCRIPTION	LIST PRICE	DI D	DIMENSIONS D W H			KW	CARTONED WEIGHT	CUBIC FEET
65N7110MPA	\$ 792	1/4	71%	10	-	-	19.81 lbs.	1.8
65N6510MPA	746	1/4	65%	10	_	-	18.30 lbs.	1.7
65N5910MPA	698	1/4	59%	10	-	-	17.53 lbs.	1.5
65N5310MPA	654	1/4	53%	10	_	-	14.90 lbs.	1.4
65N4710MPA	609	1/4	47%	10	-	-	14.34 lbs.	1.3

- Provides user privacy and conceals electrical components on freestanding applications
 Modesty panels can expand the full width or more narrow; see page 311 for more specification details
- Resin color is 1677 Frosted

TFL MODESTY PANELS



65N7110MPLL	\$ 462	3/4	71¾	10	-	-	19.81 lbs.	1.8
65N6510MPLL	439	3/4	65%	10	-	-	18.30 lbs.	1.7
65N5910MPLL	415	3/4	59%	10	-	-	17.53 lbs.	1.5
65N5310MPLL	404	3/4	53%	10	-	-	14.90 lbs.	1.4
65N4710MPLL	389	3/4	473/8	10	-	_	14.34 lbs.	1.3

- Provides user privacy and conceals electrical components on freestanding applications
 Modesty panels can expand the full width or more narrow; see page 311 for more specification details
 Grain direction runs with the width of the modesty

- Tackable textile screen with frame
- · Ships with attachment hardware
- · Pairable with the standard height adjustable desk
- See page 311 for additional specification information

TO ORDER, SPECIFY:

- Model Number
- Frame Paint Color 3. Textile Grade
- 4. Textile Color

SAMPLE MODEL NUMBER:

65N7129PVSCPF 501 A 8608

DIMENSIONS

• See pages 313-315 for all options available in Naviyd

CARTONED CUBIC

29" HIGH TEXTILE PRIVACY SCREEN WITH FRAME



MODEL NO./DESCRIPTION		PRICE	D	W	Н	Α	KW	WEIGHT	FEET
I	GRADE A	GRADE B/ COM							
65N7129PVSCPF	\$ 1531	\$ 1623	1¾6	71%	29	-	-	50.0 lbs.	10.6
65N6529PVSCPF	1462	1547	1¾6	65%	29	-	-	46.5 lbs.	9.8
65N5929PVSCPF	1395	1472	1¾6	59%	29	-	-	43.0 lbs.	8.9
65N5329PVSCPF	1321	1391	1¾6	53%	29	-	-	39.5 lbs.	8.1
65N4729PVSCPF	1251	1314	1¾6	47%	29	-	-	36.0 lbs.	7.3
65N4129PVSCPF	1220	1277	1¾6	41%	29	-	-	35.0 lbs.	2.5
65N3529PVSCPF	1189	1242	1¾6	35%	29	-	-	31.0 lbs.	2.2

LIST

- 29" H privacy screens are 21" above and 6½" below the worksurface
 Privacy screens are not applicable on extended height or C-leg bases due to tipping hazards and interferance with understructures
 Attaches to the underside of the worksurface to provide space division and privacy above and below worksurface
 See page 311 for additional details
 Attachment brackets are painted to match the color of the frame

20" HIGH TEXTILE PRIVACY SCREEN WITH FRAME



I	GRADE A	GRADE B/ COM							
65N7120PVSCPF	\$ 1319	\$ 1411	1¾16	71%	20	-	-	39.0 lbs.	7.8
65N6520PVSCPF	1256	1341	1¾16	65%	20	-	-	37.0 lbs.	7.2
65N5920PVSCPF	1189	1266	1¾16	59%	20	-	-	34.0 lbs.	6.6
65N5320PVSCPF	1121	1191	1¾16	53%	20	_	_	31.0 lbs.	6.0
65N4720PVSCPF	1054	1117	1¾16	47¾	20	-	-	28.0 lbs.	5.4
65N4120PVSCPF	1024	1081	1¾16	41%	20	-	-	27.0 lbs.	1.8
65N3520PVSCPF	993	1046	1¾16	35%	20	_	-	24.0 lbs.	1.6

- 20" H privacy screens are 12" above and 6½" below the worksurface
- · Privacy screens are not applicable on extended height or C-leg bases due to tipping hazards and interferance with understructures
- Attaches to the underside of the worksurface to provide space division and privacy above and below worksurface
- · See page 311 for additional details
- Attachment brackets are painted to match the color of the frame