

Allsteel®

Optimize™

SPECIFICATION & PRICE LIST 2018

prices effective July 1

Optimize Panel System

Cadence® Desking

Essentials™ Storage

Extensions™ Accessories



PAINTED METAL FINISHES

GRADE P1

Black	P27
Brownstone	P7D
Bungalow	P7C
Carob	P52
Flint	P02
Fossil	P28
Loft	P7B
Muslin	P4J
Parchment	P93

GRADE P2

Brilliant White	PQ8
Champagne Metallic	PR5
Gunmetal Metallic	PR3
Platinum Metallic	PR2

Metallic paints, due to varying reflectance, may appear to have less visual color consistency than other paint finishes, even when L/A/B values are exactly the same. (L/A/B — measurable aspects of color — values are maintained within a specified range, to ensure consistent appearance of paint colors.)

METAL STORAGE PULLS

Black	E4
Matte Silver	EL

ELECTRICAL AND DATA COMPONENTS

Black	E4
Brownstone	EY
Bungalow	EX
Flint	E9
Loft	EV
Muslin	EU
White	EW

Recommended Coordinate Colors:
 Brilliant White use White EW
 Carob use Black E4
 Champagne Metallic use Muslin EU
 Fossil use Flint E9
 Gunmetal Metallic use Brownstone EY
 Parchment use Muslin EU
 Platinum Metallic use Loft EV

OPTIMIZE REPLACEMENT RECEPTACLE COVERS

Black	E4
Muslin	EU
Shadow	SH

LAMINATES

GRADE L1

CORE	
Ash	LT3B
Brownstone*	LM13
Bungalow*	LM12
Camelstone	LT6A
Canyon Zephyr	LT5B
Desert Zephyr	LT5A
Flint*	LM16
Fossil Shale* NEW!	LEH1
Frosty White*	LM14
Grey Mesh	LT8A
Greystone	TM65
Loft*	LM11
Muslin*	LM15
Parchment	TM20
Pewter Mesh	LT8C
Sheer Mesh	LT8B
Silver Mesh	LT8D
White Tigris	LT2A
Whitestone	TM33

WOODGRAIN

Florence Walnut* NEW!	LFW1
Kingswood Walnut* NEW!	LK11
Natural Maple*	LWD
NeoWalnut* NEW!	LNU1
Shaker Cherry*	LW7C

GRADE L2

Amber Cherry*	LWAC
Beigewood*	LWBE
Branded Oak*	LBO1
Brazilwood*	LWBR
Columbian Walnut*	LWZ
Ebony Recon*	LER1
Fawn Cypress*	LFC1
Lowell Ash*	LLA1
Mangalore Mango*	LMM1
Natural Recon*	LNR1
Phantom Charcoal*	LPC1
Phantom Ecru*	LPE1
Portico Teak*	LPT1
Skyline Walnut*	LSW1

GRADE L3

Cafelle*	LWC
Charcoal Walnut*	LWCW
Natural Walnut*	LWNW

* Storage available in these 29 laminates.

LAMINATE EDGE COLORS

Amber Cherry	DA
Beigewood	DE
Black	E4
Branded Oak	BO
Brazilwood	DB
Brownstone	EY
Bungalow	EX
Cafelle	DG
Carob	E8
Charcoal Walnut	DC
Columbian Walnut	DZ
Ebony Recon	DR
Fawn Cypress	FC
Flint	E9
Florence Walnut NEW!	FW
Fossil	EH
Kingswood Walnut NEW!	KI
Loft	EV
Lowell Ash	DL
Mangalore Mango	MM
Muslin	EU
Natural Maple	DD
Natural Recon	NR
Natural Walnut	DN
NeoWalnut NEW!	NU
Parchment	EN
Phantom Charcoal	PC
Phantom Ecru	PE
Platinum Metallic	EP
Plyband ♦	PL
Portico Teak	DP
Shaker Cherry	DF
Skyline Walnut	SW
White	EW

♦ Edge is limited to flat edge surfaces: rectangle, square, trapezoid, polygon, or round. No curvilinear or combination curve and straight.

METAL GROMMETS

FOR LAMINATE WORKSURFACES

Oval/Square:	
Matte Silver	EL

PLASTIC GROMMETS

FOR WORKSURFACES

Black	E4
Brownstone	EY
Bungalow	EX
Carob	E8
Flint	E9
Fossil	EH
Loft	EV
Muslin	EU
Parchment	EN
White	EW

PLASTIC GROMMETS WITH WOODGRAIN EDGE

If woodgrain edge is specified, the plastic grommet color is predetermined, based on finish selection.

Beigewood, Fawn Cypress, Natural Maple, and Natural Recon Muslin EU
 Branded Oak Brownstone EY
 Phantom Charcoal Flint E9
 Phantom Ecru Loft EV
 Portico Teak Fossil EH
 Skyline Walnut Flint E9
 All other woodgrain options Black E4

LOCKS

Matte Silver	EL
--------------------	----

Note: Refer to individual product pages for upcharges.

- Software support packages furnished to the customer, either by Allsteel® or by another source, which support the sale of Allsteel products are superseded by printed price lists.
- Prices are subject to change without notice. All orders are subject to prices in effect at the time of order.
- Please refer to your Allsteel Dealer Sales and Discount Policies for order placement information, terms and conditions.
- Additional copies of this Specification and Price List are available upon request from Allsteel Literature Fulfillment at 1-866-255-7833.

- Ordering information appears at the bottom of each product page complete with examples on how to specify. Fabric and finish pages are referenced at the bottom of product pages.

This publication is available as an interactive or downloadable PDF at www.allsteeloffice.com.

Questions or Comments?

Please call us at: **888-ALLSTEEL**
888-255-7833

Finishes	Inside Front Cover
Table of Contents.....	3
New, Revised, and Discontinued Products.....	4
Allsteel Lifetime Warranty	5
COM and Specials Policies.....	6-8
Programs	9-10
Typicals Overview.....	11

SPECIFICATIONS

Introduction and Overview	12-13
Working with Panels and Connectors.....	14-17

PANELS & CONNECTORS

Tackable Panels and Stacking Panels	18
Top Trim	19
Glazed Panels and Glazed Stacking Panels	20
Hinged and Sliding Doors	21
Connectors — Inline, “L”, “T”, “X”, and Extended Straight... ..	22
Connectors — End Trim, Variable Height, and Wall Mount	23

ELECTRICAL

Working with Electrical.....	24-31
Harnesses	32
Receptacles, In-Feeds, and Hardwire.....	33
Electrical and Data Components.....	34

WORKSURFACES & SUPPORTS

Overview of Worksurfaces	37
Working with Worksurfaces	38-45
Working with Cadence® Freestanding Desking.....	47-55

Laminate Worksurfaces

Primary, Wave, and Bow-Front Worksurfaces.....	56-57
Corner, Corner Shelves, and Corner Cove	58-59
Altitude® Height-Adjustable	59
Peninsula, Jetty, and Boomerang	60
Reef, Quarter, and D-Shaped.....	61
Countertops and Countertop Brackets	62
9120 Program for Non-Standard Sizes.....	64-65

Worksurface Supports

Panel-Mount Worksurface Supports and Brackets	67
Cadence Worksurface Supports and Modesty Panels	68-69

OVERHEADS & HUTCHES

Working with Overhead Storage	70-73
Overheads and Shelves	74-75
Hutches	76

EXTENSIONS™

Introduction	103
Working with Organization Tools	104-106
Tool Rails and Work Tools.....	107-108
Marker Boards, Technology Modules, and Drawers	109
Working with Ergonomic Accessories	110-115
Keyboard Supports, CPU Hammocks, and Corner Sleeve	116
Monitor Arms and Tablet Arms	117
Working with Illumination.....	118-119
Illumination	120-121

APPENDIX AND INDEX

Locking Specification/Easy Lock	122-124
16" x 20" Fabric Samples and Touch-Up Paint.....	125
Replacement Parts Order Form.....	126
Index — Model Numbers with Page Reference	127-129
Panel Fabrics	Inside Back Cover

NEW PRODUCTS

Laminate Worksurfaces

Straight Leading Edge Corner Worksurfaces — 7/1/2018

Storage

Essentials 18"D x 30"W 2-, 3-, 4- and 5-high Bookcases and Storage Cabinets — 12/15/2017

Essentials 18"D x 36"W 2- and 4-high Bookcases and Storage Cabinets — 12/15/2017

NEW FINISHES AND FABRICS

Laminates — Florence Walnut LFW1, Fossil Shale LEH1, Kingswood Walnut LKI1, NeoWalnut LNU1 — 7/1/2018

Edges — Florence Walnut FW, Kingswood Walnut KI, NeoWalnut NU — 7/1/2018

Panel Fabrics — Binary — 7/29/2018
Disperse and Blazer Lite — 1/29/2018
Refuge Eclipse RFG990 and Glacier RFG991 — 1/1/2017
Etch 9 colorways and Exchange 8 colorways (All are listed on inside back cover) — 7/31/2017

DISCONTINUED PRODUCTS

Optimize

Closed End Panel Supports and In-Line Support Legs — 6/30/2017

Non-Tackable Panels — 6/30/2018

Worksurfaces

Wave, Boomerang, Reef, Straight Edge Corners, and 120° Countertops — 1/13/2018

T-Mold Edge Worksurfaces — 1/13/2018

Scallop wire management detail — 1/13/2018

Storage

Essentials Personal Files, 27¼"H Lateral Files, Lateral Files with posting shelves, and Overfiles — 12/31/2018

Essentials File Dividers — 7/1/2018

Essentials™ 19⅞"D Pedestals — 6/30/2017

Extensions™

Footrest — 1/2017

DE-EMPHASIZED FABRICS

Appoint panel fabric — Copper APN918, Hummus APN914, Turmeric APN910, Walnut APN913 — 7/2/2018

Reflections panel fabric — Bamboo REF926 — 7/2/2018

Refuge panel fabric — Hemp RFG997, Sandbar RFG995 — 7/2/2018

Sarto panel fabric — Desert SRT933, Earth SRT937, Meadow SRT925, Sisal SRT929, Wheat SRT913 — 7/2/2018

Tempest panel fabric — Ginger TP925, Sandstorm TP950 — 7/2/2018

DISCONTINUED FABRICS

Tango panel fabric— all colorways 12/31/2018

Tasanee panel fabric — all colorways 12/15/2017

Lifetime Warranty

Allsteel Inc. warrants its products to be free from defects in material and workmanship for as long as the original purchaser owns them, except as set forth below.

Allsteel shall repair or replace with comparable product (at Allsteel's discretion), free of charge, any Allsteel product or component manufactured after January 29, 2017, that fails under normal commercial office use.

This warranty is subject to the following provisions:

Some natural variations occurring in wood, leather, or other natural materials are inherent to their character and not considered defects. Allsteel does not warrant the colorfastness or matching of colors, grains, or textures of these materials. Additionally, a Customer's Own Material (COM) selected by, and used at the request of, a user is not warranted.

The materials and components listed below are covered according to the following schedule from the date of sale:

- Wood products and electrical components (lamps and ballasts are not covered), seating controls, pneumatic cylinders, glides, casters and polymer-based components, and foam — 12 years
- Wood seating, stacking chairs, and laminates — 10 years
- User-adjustable worksurface mechanisms, tablet arm mechanisms, interior wood-framed seating and lounge products, occasional tables, Mimeo™ mesh, Quip™ mesh, Scout® mesh, panel and seating upholstery fabrics, and other covering materials — 5 years
- Marker board surfaces and upholstery on Gather™ and Retreat™ products — 3 years
- #19®, Access™, Acuity®, Clarity®, Evo™, Inspire®, Lyric™, Quip, Relate®, Scout, Seek®, and Trooper® asynchronous and synchro-tilt models are warranted for multiple shifts and users up to 300 lbs. Mimeo is warranted for multiple shifts and users up to 350 lbs. Lyric Large & Tall is warranted for multiple shifts and users up to 400 lbs. Trooper Large & Tall is warranted for multiple shifts and users up to 500 lbs. All other Allsteel chairs and components are warranted for single-shift, 40-hour workweek usage.
- #19 chair, including components and material, is warranted for as long as the original purchaser owns the chair.

- #19, Access, Acuity, Clarity, Evo, Lyric, Relate, and Seek mesh/carriers and Mimeo and Quip carriers are considered structural chair components and as such are warranted for as long as the original purchaser owns the chair.
- Normann Copenhagen products — 2 years
- Undercabinet LED light — fixture warranted for 3 years; power supply warranted for 1 year
- Link™ LED light — 5 years
- Wand™ LED Light — fixture warranted for 5 years; power supply warranted for 3 years
- Beyond® movable walls — 10 years; moving parts such as door hardware and door mechanisms — 5 years; customer's own hardware — supplier warranty

This warranty does not apply to:

- Normal wear and tear over the course of ownership, including fabric puddling
- Damage from sharp objects (e.g., writing utensils, heeled shoes, scissors, jewelry, keys)
- Modifications or attachments to the product not approved by Allsteel
- Products not installed, used, or maintained in accordance with product instructions and warnings
- Products used for rental purposes
- Damage caused by the carrier in-transit, which is handled under separate terms
- Third-party products. Allsteel, to the extent possible, will pass through to the original purchaser (and process claims under) any warranty provided by manufacturers of undercabinet lighting, ergonomic work tools, or other third-party products supplied by Allsteel.

TO THE EXTENT ALLOWED BY LAW, ALLSTEEL MAKES NO OTHER WARRANTY, EITHER EXPRESS OR IMPLIED, INCLUDING ANY WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. ALLSTEEL WILL NOT BE LIABLE FOR ANY CONSEQUENTIAL OR INCIDENTAL DAMAGES.

This warranty applies only to products sold within the United States of America and the Commonwealth of Canada.

Your Allsteel Dealer is our mutual partner in supporting your warranty requests. To obtain service under this warranty, please contact your Allsteel Dealer.

COM Program

Allsteel understands that customers may at times want to specify fabrics outside of Allsteel's standard fabric offering. Our COM program was designed to make specifying COMs on Allsteel products a simpler, friendlier, and hassle-free process. This process is simple and easy to use, and is described below under "Allsteel to Supply (ATS)." If a Dealer wishes to manage the COM process themselves, they can do so by following guidelines under "Dealer to Supply (DTS)". **ATS is the preferred method for all COM fabrics.** With ATS, Company will provide acknowledgment based upon planned date of receipt of COM fabric and manage the entire process. DTS is allowed if it is not a partnership fabric or if Company does not have access to the supplier. **DTS may cause order delays and is strongly discouraged.** Find out more about Allsteel's COM process by emailing our COM Department at allsteelcomteam@allsteeloffice.com.

Allsteel to Supply (ATS):

1. Select the fabric you wish to use and check the COM Search on Synergy at: [Allsteelsynergy/Design Resources/Textiles & Finishes/COM Search](#) or COM Search quick link. You will need to have the COM supplier's name, fabric pattern name, and color name to search for approved fabrics.
2. If your fabric is listed as an approved fabric, you may place your order directly with Allsteel Customer Support. Please use the fabric code (e.g., S216426XP) from the COM Test Request on your order in the place of the standard fabric code.

If your fabric is not listed as approved, you will need to select the "Request COM Test" link on the COM Search website. If your fabric is not listed as approved, and it is not a Partnership fabric you may request a "Dealer to Supply" code. Select the "Request COM Test" link on the COM Search website. Your name, company name and email will be prepopulated fields. The secondary email, project name, and bid/contract number are optional information. The supplier, pattern, and color will show a list by clicking in the box and entering the first letter of the name and these are free form text boxes. Once that information is entered click add. (Multiple series can be added to the same request if they are the same supplier, pattern, and color.) Then click submit.
3. An email will be sent to the to the requestor stating the COM Request was successfully submitted. Up to four emails could be received: Testing materials requested, in testing, and final approval/denial with price grade and fabric code. It's rare actual test yardage is required. Testing is mainly done by reviewing the attributes of the fabric. The testing process takes approximately 48 hours. Written COM price quotes hold pricing for 90 days after issue date.
4. Once the fabric has been approved by Allsteel, enter your order directly with Allsteel Customer Support. Allsteel will purchase all COM fabric directly from the COM suppliers and schedule for production.

In the event that the Dealer decides to cancel a COM fabric order, the Dealer is responsible for the cost of the fabric plus a handling charge that is equal to 10% of the fabric cost.

Dealer to Supply (DTS):

1. Select the fabric you wish to use and check the COM Search on Synergy at: [Allsteelsynergy/Design Resources/Textiles & Finishes/COM Search](#) or COM Search quick link. Or call Allsteel Customer Support to see if the fabric you have chosen has already been tested and approved on the product you are interested in.

You will need to have the COM supplier's name, fabric pattern name, and color name for this inquiry.
2. If your fabric is not listed as approved, and it is not a Partnership fabric you may request a "Dealer to Supply" code. Select the "Request COM Test" link on the COM Search website. Your name, company name and email will be prepopulated fields. The secondary email, project name, and bid/contract number are optional information. The supplier, pattern, and color will show a list by clicking in the box and entering the first letter of the name and these are free form text boxes. Once that information is entered click add. (Multiple series can be added to the same request if they are the same supplier, pattern, and color.) Then click submit.
3. An email will be sent to the to the requestor stating the COM Request was successfully submitted. Up to four emails could be received: Testing materials requested, in testing, and final approval/denial with price grade and fabric code. It's rare actual test yardage is required. Testing is mainly done by reviewing the attributes of the fabric. The testing process takes approximately 48 hours.
4. Make sure to use a "Dealer to Supply" COM code (e.g., S216426ZP) and place your order directly with Allsteel Customer Support.
5. All "Dealer to Supply" orders will be charged Grade 4 pricing for seating, Grade 3 for Gather, and Grade D pricing for panels. Dealers will pay for the COM fabric separately.
6. All "Dealer to Supply" fabric must be sent on a fabric roll. Estimate the yardage required by using the yardage requirements listed in the price list by model. For questions please contact Allsteel Customer Support.
7. Place your fabric order directly with the COM Supplier with instructions for the fabric to be sent on a fabric roll to:

HNI Textile Distribution Center

COM Production Yardage — PO Number

Docks 20-22

301 Mulberry Avenue

Muscatine, IA 52761

Information that **MUST** be included in the packing slip attached to the fabric:

1. Dealer's Purchase Order number to Allsteel
2. Allsteel's Tracking number for the COM fabric
3. Dealer Name
4. Yards of Fabric

If the fabric shipment does not match the correct fabric and yardage, Allsteel will notify the Dealer for resolution.

If Allsteel receives fabric with incorrect labeling that cannot be linked to an Allsteel furniture order, Allsteel will hold the fabric for up to 7 days, while the COM Expeditor attempts to identify the order. After 7 days, Allsteel will return the fabric to sender. There are no exceptions to this policy.

Any cancelled orders are subject to cancellation charges up to the full value of the Allsteel product cancelled. Allsteel will determine the actual cancellation charge at the time the cancellation is requested.

8. For additional details on "Dealer to Supply" fabric refer to your Allsteel terms and conditions.

Additional Policy Information:

The company assumes no responsibility for the overall appearance, flammability, normal durability, colorfastness, or any other quality standards. The Company reserves the right to reject a COM if the quality of the COM is not satisfactory for the product. Should this occur, the customer will be notified with an explanation within 7 working days of receipt of test materials.

The company is not responsible for fabric that has become obsolete at the COM supplier, that is of poor quality, or that is delivered late to the manufacturer from the COM supplier. Excess yardage will be disposed of at Allsteel's discretion.


All cancellations or changes to COM orders are subject to Company approval. Because of the nature of COM, special fabrics, finishes, and structural modifications, products ordered as specials and then cancelled prior to shipment are subject to cancellation costs up to the full value of the product cancelled. The company determines the actual cancellation charge at the time the cancellation is requested. Upon approval, a cancellation number is issued to the Customer.

Purchase orders will not be accepted or entered unless the testing process is complete with positive results.

If all testing has been previously completed, re-testing is only necessary if fabric is to be used on a different product, or pattern direction has changed from that previously approved.

Previous test results can be obtained by a customer on the COM Search on Synergy or by calling Allsteel Customer Support.

All COM fabric will be applied to seating and panel systems Pattern Cut unless Railroad Cut is requested and approved on the COM Test Request. Any fabrics approved as a width pass, the dealer is responsible for clarifying Railroad Cut on orders containing items that are too large to support the Pattern Cut of a fabric application (any items larger than 48" high or wide).



Fire Retardant

The Dealer is responsible for ensuring that the COM fabric is certified to meet all flame retardant requirements.

For more information, please contact Allsteel Customer Support.

YARDAGE REQUIREMENTS FOR FABRIC WITH REPEATS — FOR USE ON GATHER™ PRODUCTS

Fabric Width	Plain Fabric	2"– 14" Repeat	15"– 19" Repeat	20"– 27" Repeat	28"– 36" Repeat
54"	0	+15%	+20%	+25%	+30%
53"	+6%	+19%	+24%	+28%	+36%
52"	+13%	+23%	+28%	+33%	+38%
51"	+19%	+26%	+31%	+36%	+41%
50"	+25%	+30%	+35%	+40%	+45%
49"	+30%	+35%	+40%	+45%	+50%
48"	+35%	+40%	+45%	+50%	+55%
47"	+45%	+50%	+55%	+58%	+65%

Depending upon the pattern repeat, it may be necessary to pattern cut the fabric. This will require 10% additional fabric.

To calculate multiple repeats (vertical and horizontal), add each repeat for total yardage required. For example for a fabric width of 54": 7" vertical requires 15%, 15" horizontal requires 20% total additional yardage required equals 35% (15% + 20%). Therefore, if your chair requires 2 yards of fabric, multiply 2 by 35%. Then 2.7 yards will be yardage required.

Special Paint & Stain Policy

Allsteel at its own discretion may modify its standard products with non-standard paint and stain colors to meet specific needs. Dealer is required to submit a special paint or stain request via the COM Search on Synergy. A sample of the non-standard paint or stain color desired will be required for matching. Pricing, lead time, and order information will be provided at the time of approval.

- For each new requested stain or paint, there will be a \$500 net fee to cover supplier costs to match the special item.
- For existing, previously-approved stains or paints, there is no \$500 matching fee, however, there is a sample chip fee of \$175 net for stains and \$100 net for paints.
- Samples, preferably at least 3" x 5" chips, of the exact color desired should be sent to the Allsteel Tailored Products Group. Paint matches require (3) sample chips and stain matches require (3) sample chips. Please mail these sample chips to the address below and reference the Special Item Request Number from Tailored Solutions.

Allsteel Inc.

Attn: Tailored Products Group
2210 Second Avenue
Muscatine, IA 52761

- Allsteel will color match the sample and send control samples to the address provided in the request. Dealer will review Allsteel's color match and approve by signing the back of the sample chip. Send the signed sample back to the Allsteel Tailored Products Group.
- Special paints will be assigned a paint price grade.
- Orders will not be accepted until Allsteel receives the Dealer's written approval on the color match.
- Extended lead times will apply on orders containing special paints or stains.
- Due to manufacturing techniques, materials, and quality issues, some exclusions will apply and some matches may be declined.

Important Notes

- Natural veneer is subject to nature's quality control. Differences in grain and color are naturally occurring variations and cannot be controlled by the manufacturer and cannot be considered as product defects. Natural veneer has the characteristics and beauty of a living organism; with its own variations of grain, growth, and color patterns. For these reasons, Natural veneer is preferred by many for its warmth and personal characteristics.
- Color changes will occur over time when wood is exposed to light. For this reason, when new product is ordered as an addition to existing product, there will be color variances between the old and new product. Please remember when specifying new product that although the species of veneer will be the same, additional product is being manufactured from a different tree. It may take several months for the new furniture to mature to the color level of existing product. Even with this maturation process the additional product will not be an exact match.

Special Laminate Policy

The Company at its own discretion may modify its standard products with non-standard laminates to meet specific needs. Contact the Allsteel Tailored Products Group for pre-approved Wilson Art laminates and pricing for special laminates. When requesting a special laminate please supply manufacturer, along with name and pattern number of laminate.

- Extended lead times will apply on orders containing special laminates.
- Due to manufacturing techniques, materials, and quality issues, some product exclusions will apply and some requests may be declined.

Everyday Advantage®

Program Terms for Everyday Advantage



1. Orders must clearly state “Everyday Advantage Order” and include the appropriate Everyday Advantage contract number:
 - Everyday Concensys® Std-0131, Everyday Concensys Canada-0133
 - Everyday Optimize™/Terrace®/Further™ Std-0125, Everyday Optimize/Terrace/Further Canada-0127
 - Everyday Concensys Gov-0132
2. Choose the correct contract in your electronic ordering system by selecting the panel system, (Concensys or Optimize/Terrace) then add other desired products. If no systems product is being ordered, either contract can be selected.
3. Everyday Advantage orders are not eligible for bid pricing.
4. The complete Concensys, Optimize, Further, and Terrace systems lines; and a private office solution, Approach™. This program also includes Access™, Evo™, Inspire®, Lyric™, Mimeo™, Nimble®, Quip™, Relate®, Scout®, Seek®, Tolleson, and Trooper® seating. Altitude®, Aware®, and Merge® tables are available, along with Align™ Lockers and metal storage, and the complete Essentials™ storage line. In addition, Extensions™ ergonomic accessories and lighting are part of the offering.
5. All textiles and finishes are available, but some may have extended lead times.
6. Everyday Advantage orders are not limited to a minimum or maximum.
7. All orders ship based on standard lead times. Large-quantity orders of like products may be subject to longer lead times.
8. Standard freight terms apply.
9. If driver assistance is needed, standard driver assist charges will be added at time of order entry.

Allsteel Inc. reserves the right to amend or terminate this program at any time with 30 days written notice. Allsteel is not liable for service delays caused by force majeure (circumstances beyond Allsteel's control).

A full gallery of typicals from each Allsteel system can be found on our website: www.allsteeloffice.com/TypicalsGallery. Each typical includes a complete BOM with current pricing, downloadable CAD files, and PDFs of each drawing.

Use the Allsteel Typicals Gallery to find the components in Optimize workstations:



Optimize "L" Station 7' x 6'

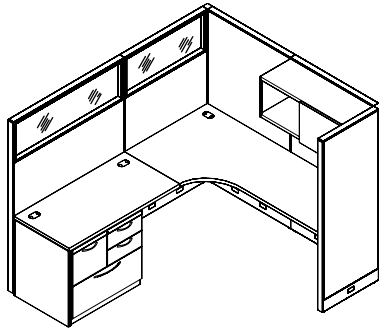

Line Item	Product Description	Qty	Model Number
1	Optimize Tackable Panel 65"H x 36"W w/out Top Cap	2	P16536TP
2	Optimize Tackable Panel 65"H x 24"W w/out Top Cap	1	P16524TP
3	Optimize Tackable Glazed Panel 65"H x 48"W w/out Top Cap	1	P16548HP
4	Optimize Tackable Glazed Panel 65"H x 36"W w/out Top Cap	1	P16536HP
5	Panel Top Cap 36"W	3	P1TC36
6	Panel Top Cap 48"W	1	P1TC48
7	Panel Top Cap 24"W	1	P1TC24
8	Optimize Inline Connector Kit	2	P3CONTT
9	Optimize "L" Connector 65"H	2	P3CONL65
10	Optimize Panel End Covers 65"H	2	P365PV
11	Corner Cove 36"x72"-24"L/24"R Extd RH Flat Edge w/Grommets	1	T5922ER
12	Worksurface 24"D x 48"W Flat Edge Lam w/Grommets	1	T52448S
13	End Panel Support LH 24"D x 29½"H	1	TKEP2429PL
14	Cantilever Bracket 18"D LH	1	T6CB18L
15	Cantilever Bracket 24"D RH	1	T6CB24R
16	Cantilever Bracket 24"D LH	1	T6CB24L
17	Worksurface Bracket Kit	1	T6BK
18	Power Harness 36"W	2	A871236
19	Base Power In-Feed Cable 3+1 & 2+2 Systems	1	A879072
20	Duplex Receptacle Circuit 1: 3+1 or 2+2 System	1	A871501
21	Duplex Receptacle Circuit 4: 3+1 or 2+2 System	1	A871504
22	Essentials Personal File F/B/B/Lat Drawer Arch Pull	1	EPF23018FBBLA
23	15"H x 36"W Sliding Single Door Overhead	1	OH1536SD



Optimize "U" Station 8' x 8'

Provides seated privacy with ample storage and worksurface space.

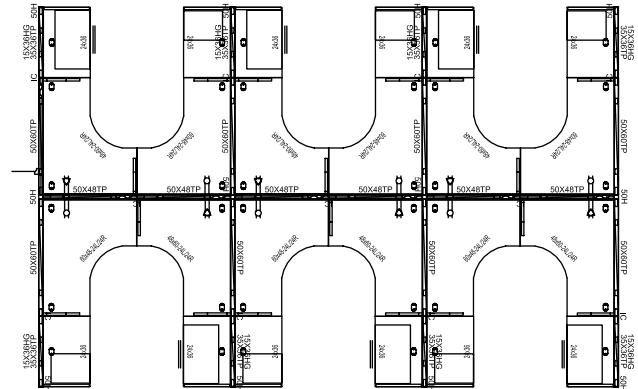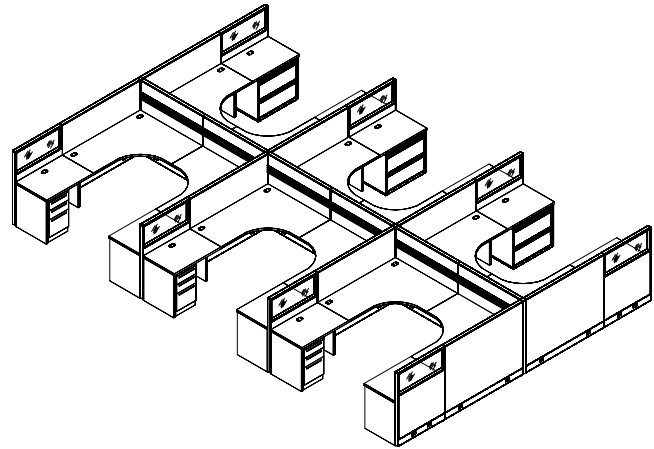

Optimize "L" Station 7' x 6'

Storage tower allows lower panel height for an open feeling.

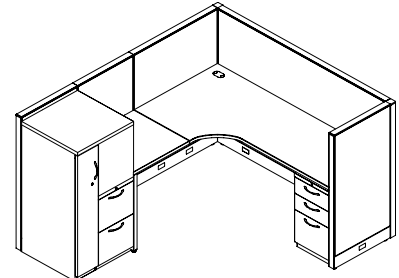

Visit www.allsteeloffice.com/TypicalsGallery to view these typicals and more.

Workstations made easier.

Whether you're outfitting a call center, creating teaming areas, replacing a reception desk, or adding new stations for managers, Allsteel can help you make the most of your office with Optimize. By bringing together panels, worksurfaces, and storage in one cohesive offering, we've made it easy for you to create efficient, well-designed spaces. All you have to do is configure these quality components to fit the needs of everyone in your office. Let us show you how.

Optimize makes a good first impression.

In areas open to the public, choose panels, worksurfaces, and storage to define space and keep projects organized. In this reception/shared workspace, a transaction countertop welcomes guests and worksurfaces below provide ample space for computers and paperwork.

We help you put it all together.


An open configuration with lower panels and a small footprint is perfect for people who perform the same function and need to share information throughout the day. Optimize benching can utilize tool rails and monitor arms to keep items off the desktop. An integrated D-shaped worksurface makes it easy for workers to come together to collaborate and then quickly return to their personal work areas.

As work changes, Optimize changes with you.


Optimize helps workers adjust workstyles throughout the day, from concentrated work to team brainstorming. In team areas, each person can have ample privacy, roomy storage with overhead bins, as well as a spacious worksurface for individual tasks. When it's time to collaborate, a table within the workspace and mobile pedestals that double as seating make it easy to come together.

Make the most of your space.


With Optimize panels, worksurfaces, and storage, you can create stations that feel like private offices. Higher panels promote privacy along the aisle while glass stackers near windows bring natural light into the space. Plenty of enclosed, lockable storage above and below the worksurface holds sensitive information. A U-shaped worksurface arrangement creates a natural conference area to accommodate conversations with team members or clients.

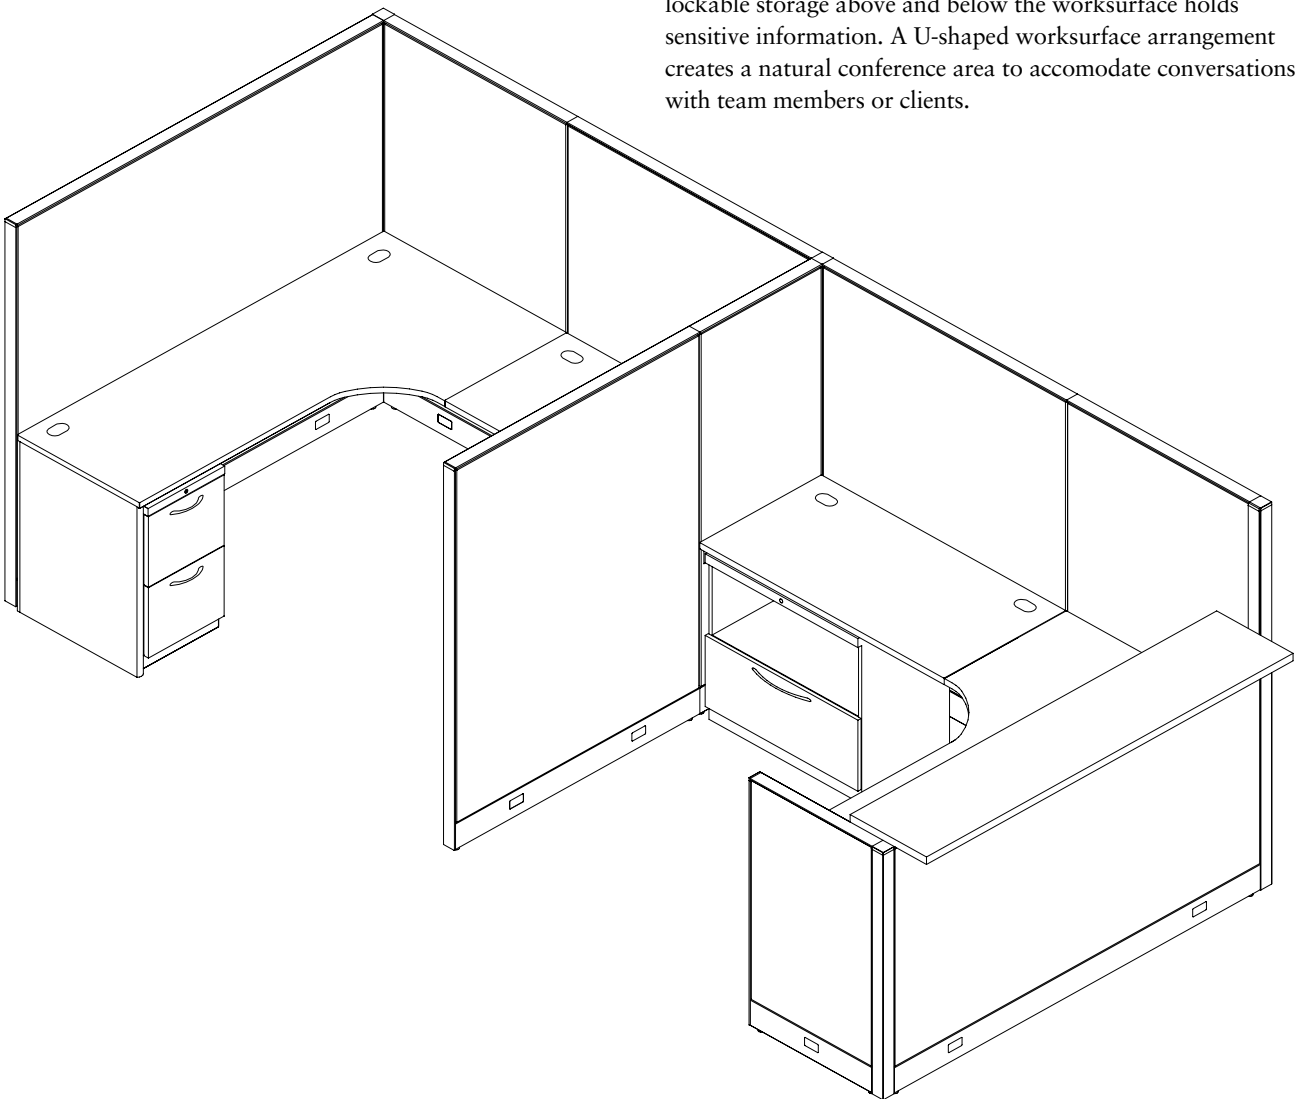


BASE RACEWAY PANELS — Tackable

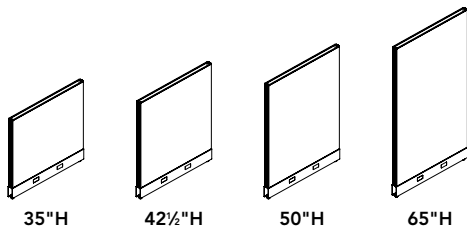


BASE RACEWAY PANELS — Tackable Glazed




TOP TRIM



STACKING PANELS — Tackable and Glazed



DOORS




	24"W	30"W	36"W	42"W	48"W	60"W	72"W
15"H							
35"H							
42 1/2"H							
50"H							
65"H							


Connector Kits — Optimize profile

"TT" Inline Connector Kit
 "L" 90° Connector Kit
 "T" 3-way Connector Kit
 "X" 4-way Connector Kit
 "S" Extended Straight Connector Kit

"B" 2-Way 120° Connector Kit
 "C" 3-Way 120° Connector Kit
 "VH" Connector Variable Height
 "H" Inline Variable Height Kit
 "W" Wall Mount Kit
 "P" Panel End Trim Kit

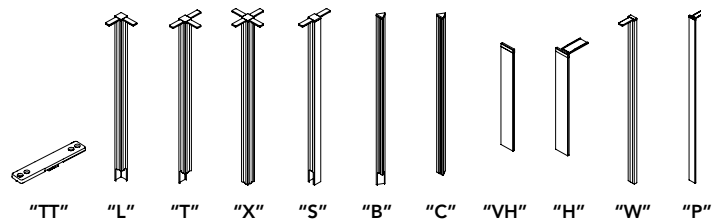

Panels

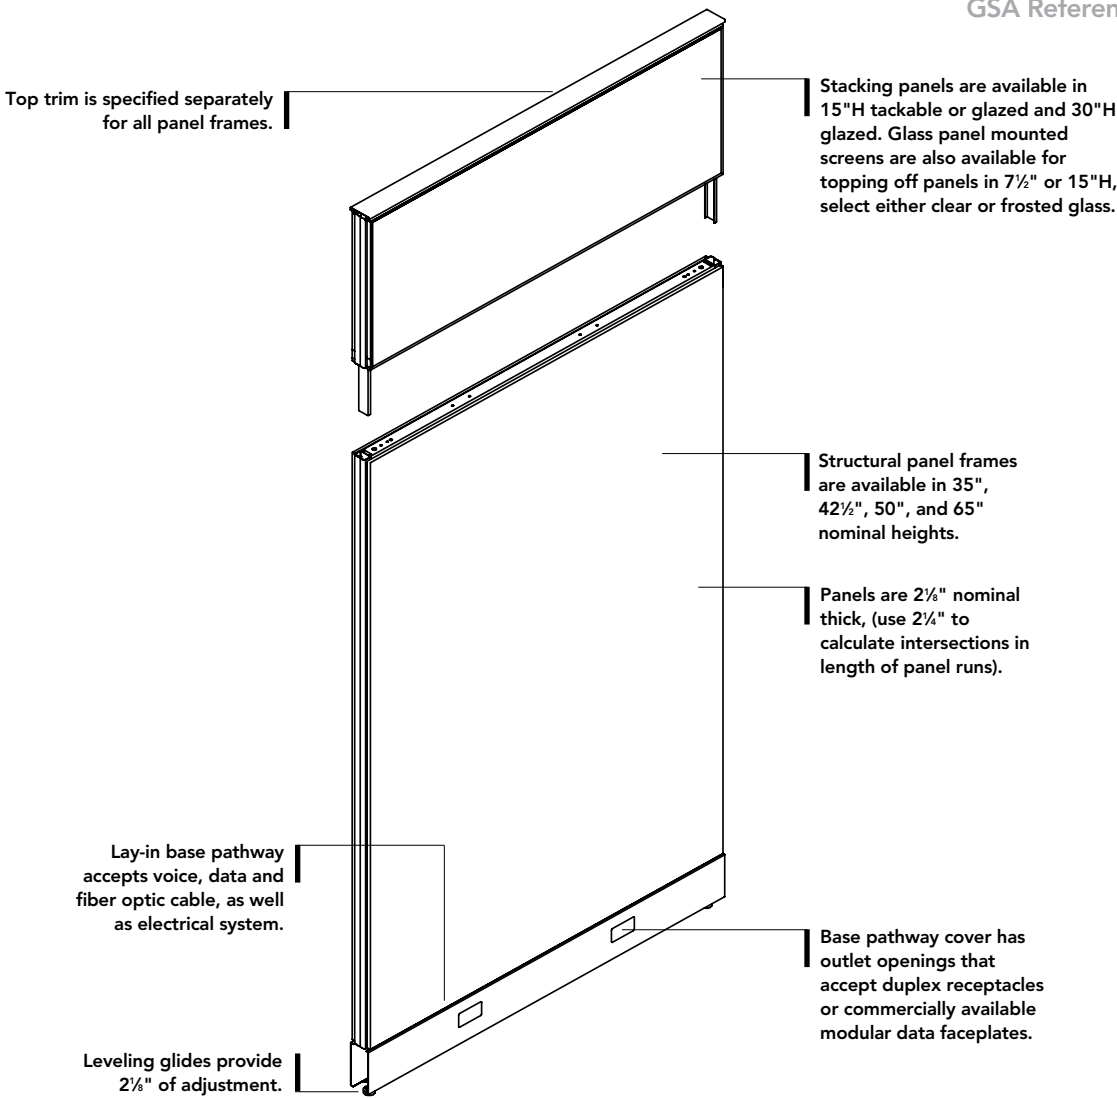

Frame Dimensions (Actual)

Depth: 2⅝" (use 2¼" to calculate intersections in length of panel run)



Widths: 20", 24", 30", 36", 42", 48", 60", 72"

Heights: 34¼", 41¾", 49¼", 64¼" (with levelers fully retracted)

Leveling Glides: 2⅝" range

Stacking Panels: 15"H fabric and glass, 30"H glass




Frameless Glass Screens: 7½"H, 15"H

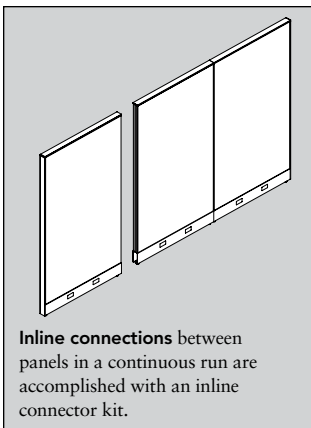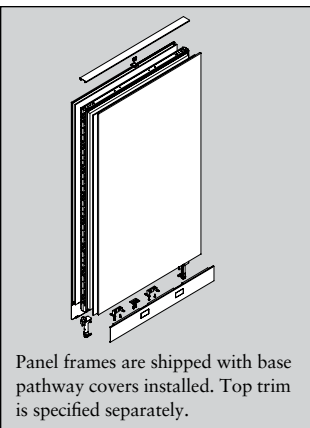

Tackable Panels (pages 18-19)


- Specifications: 4-sided, welded tubular steel panel frame.
- Panel frames include and are shipped with base pathway covers installed. Top trim is specified separately for all panel frames.
- Hardware included with connector kits.
- Available in 4 heights and 8 widths — add ⅜" for each panel vertical end trim.
- Panel frames can be leveled up to 2⅝". Actual panel height varies depending on position of leveling glides.
- Direct connections between same height frames in a continuous run are accomplished with provided hardware. There is no incremental increase in dimension along the run.
- For adequate stability, one of two methods of stabilization shown on page 15 must be adhered to.
- Due to depth of panel, back-to-back data modules should not be used in the base. Optional 3-hole kickplates are available.
- Add 2¼" to panel run for each "L", "T", "X", or extended straight connector ("S").
- Acoustical panels meet BIFMA recommendations.
- Fabric selection for 72"W panels is limited. Available 72"W panel fabrics are flagged with a "W" on the inside back cover of this price list.

Building Vertically with Optimize Panels

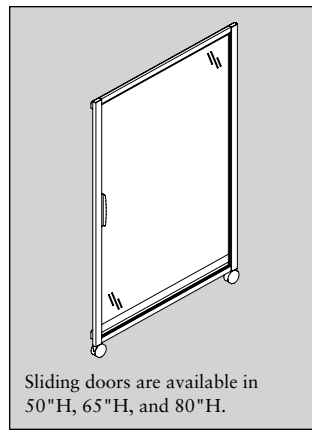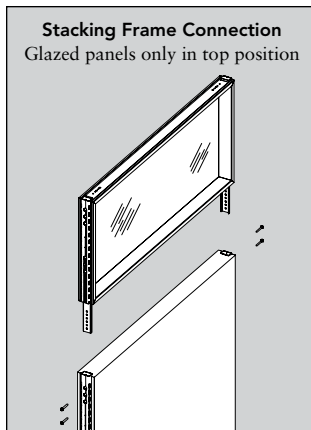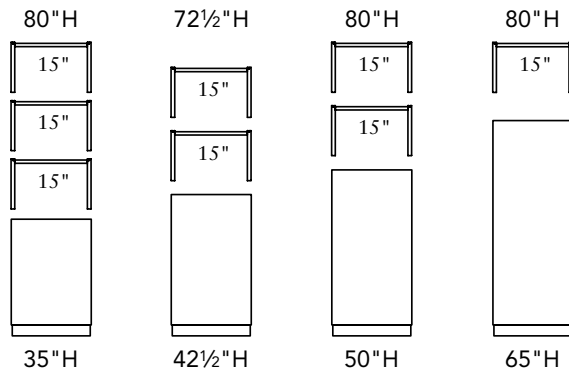


Building Horizontally with Optimize Panels

Method 1—Opposing Returns



Method 2—Single-Sided Returns



Important planning guidelines: For adequate stability, one of two methods of stabilization must be adhered to:

Method 1 — Opposing returns

- A parent run must be a minimum of 48" and a maximum of 144" between return panels.
- The parent run must have a minimum of two 24"W return panels running in opposing directions on each end of run.
- Return panels must not be any more than 30" shorter in height than parent run.
- When using 120° connectors, 12" must be added to length of return panels as determined by methods 1 and 2.

Method 2 — Single-sided returns


- A parent run must be a minimum of 48" and a maximum of 144" between return panels.
- The parent run must have a minimum of two return panels extending in one direction. Stack-ons may require additional length. See chart.
- Return panels must not be any more than 30" shorter in height than parent run.

Stacking Tackable and Glazed Panels (pages 18 and 20)

- When adding stacking panels, remove the top trim from the structural panel, and install top trim on top of the stacking panel.
- Stacking connection provides a solid connection, allowing the stacking frame to accept hang-on components, per Optimize configuration guidelines at left.
- Includes attachment hardware. Specify connectors separately.
- Only one stacking glazed panel can be added to top position of any Optimize panel of same width from 20"W to 72"W up to a maximum combined height of 80".
- End trim is specified in full end height to include height of base panel + stacking panel.
- Guidelines for using overhead storage with stacking frames are given on page 71.
- Stacking glazed panels feature clear or frosted tempered safety glass inserts (specified). Glass frame is painted to match trim.
- Stacking frames can be added to the top of same width 35"H, 50"H, and 65"H base panels up to 80"H; added to 42 1/2"H panels up to 72 1/2"H.
- Slot modularity will be lost on stacker used with 42 1/2"H panels. If panel mounting slots are not being used, this is not an issue.
- Do not combine differing frame widths in a single stack. No spanning multiple frames.
- Stacking frames cannot be used as base frames.
- Fabric selection for 72"W panels is limited. Available 72"W panel fabrics are flagged with a "W" on the inside back cover of this price list.


Tackable Glazed Panels (page 20)

- Available 50"H and 65"H with 15"H clear or frosted tempered safety glass inserts (specified).
- Glass frame is painted to match trim.
- Top trim is specified separately.
- Cannot stack on glazed panels.
- Fabric selection for 72"W panels is limited. Available 72"W panel fabrics are flagged with a "W" on the inside back cover of this price list.



Glass Panel Mounted Screens (page 21)

- Frameless insert integrated into the base panel frame top trim.
- Replaces top trim on structural or stacking tackable frame.
- It is possible to span multiple frames when the combined frame width is equal to the panel mounted screen width.
- Cannot do variable height, must go on highest panel(s).
- Panel mounted screens are non-structural. Do not hang or stack on top of panel mounted screens.
- Available in 3/8" thick clear or frosted glass.
- To be included in overall height of panel with a maximum combined height of 80".



Door Panel Frame (page 21)

- The 80"H door panel frame includes 42"W frame, 36"W laminate door, hinges, and attaching hardware. Top trim is specified separately.
- See illustration at right.
- Lockset with knob or lever ordered separately.

Optimize Sliding Doors and Mounting Kits (pages 17 and 21)



- Optimize sliding doors are available in 50"H, 65"H, and 80"H.
- See illustration and specification information on page 17.

Method 2 – Single-sided Returns

Single-Sided Panel Run	Minimum Return Panels Total (X+Y)	Minimum Return Panels Total (X+Y) with Stack-ons
48"-108"	84"	84"
114"-144"	84"	96"

Panels & Connectors


Optimize™ — Working with Panels & Connectors

[GSA Reference Page](#)


Connectors and Trim

Inline Connector Kit (page 22)

- Inline connections between panels in a continuous run are accomplished with an inline connector kit. There is no incremental increase in dimension along the run.
- Inline connector kits include all parts required for connecting two panels of same height together.
- Kit includes inline connector strap, hardware, and glide tower to glide tower screw.
- Order panel end trim kits to finish the end of every panel run (except when attaching panels to permanent walls).



Extended Straight "S" Connector Kit

"L", "T", "X", "S", "B", and "C" Connector Kits (page 22)

- "L", "T", "X", "B", and "C" connector kits are used when connecting panels at intersecting runs. For "L", "T", and "X" connector kits, add 2¼" to the total length of the panel run for each intersection, whether located in the middle or at the end of the run.
- Includes top cap, connectors, vertical cover(s), and attaching hardware.
- Extended straight connector kit "S" can be used to keep continuous runs dimensionally consistent with opposing panel runs which incorporate "T" or "X" intersections.
- Add 2¼" to the length of the run for every extended straight connector used.

Multiple-Height Connections (page 22)

- Multiple-height connections also utilize standard "L", "T", "X", and "S" connectors, in the height of the tallest panel. (See examples 1-4 at left.)

Panel End Trim (page 23)

- End vertical trim cover (includes top cap — adds ⅜" to run).
- Order to finish the end of every panel run (except when attaching panels to permanent walls).

Variable Height Connector Kits — Post Trim (page 23)

- Includes connectors, vertical cover, and attaching hardware.
- Order one per each panel height change in an "L", "T", "X", or "S".

Inline Variable Height End Trim Finish Kits (page 23)

- End vertical cover (includes top cap).
- High-low "H" covers the exposed end of a panel when joining panels in-line of differing heights. Optimize profile adds ⅜" to length of panel run.
- Order one per each panel height change in an in-line connection.
- At the end of a panel run use panel end trim.

Wall Mount Kits (page 23)



- Wall mount kits provide a means to affix a panel run to a permanent building wall.
- Includes top cap. (Color must be specified.)
- Connector adds 1" to length of panel run.
- Anchor devices are not supplied with the wall mount kit. Refer to Optimize Installation Instructions for appropriate hardware.

2-Way 120° Connector Kits (page 23)


- Includes top cap, connectors, vertical cover, and attaching hardware.

3-Way 120° Connector Kits (page 23)

- Includes top cap and connectors.

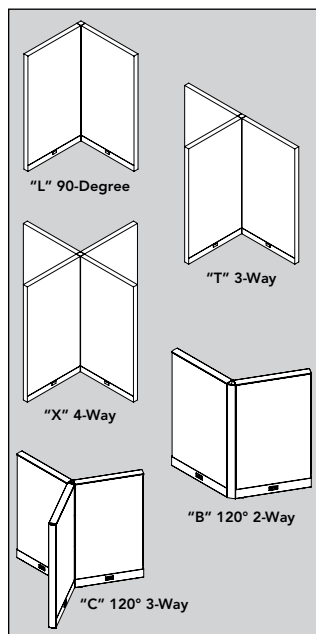


Example 1
Connectors required:
1-50"H "T"
1-15"H "VH"

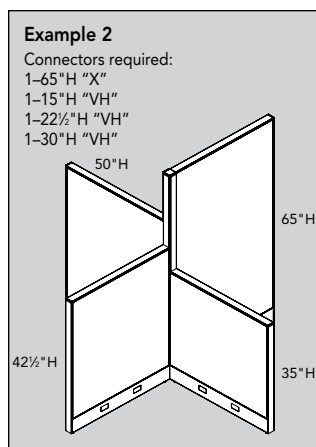


Example 2


Connectors required:
1-65"H "X"
1-15"H "VH"
1-22½"H "VH"
1-30"H "VH"

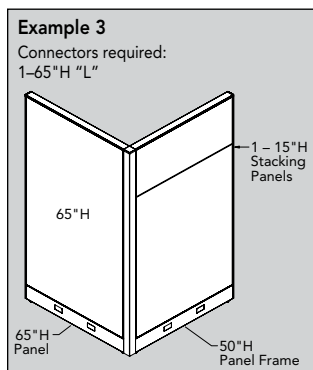

Example 3
Connectors required:
1-65"H "L"



Example 4
Example above represents Optimize variable height connection for 65"H to 50"H.



High-Low "H"

The sliding doors must be specified with specific mounting kits for each door ordered. With a Frosted Translucent insert and your choice of P1 or P2 paint, the sliding door will create a unique look for any office environment.



The sliding doors are available in 50", 65", and 80" H models and can mount to 30", 36", 42", and 48" W panels. They accommodate a 36" W opening and are 42" W, nominally. The doors ship from the factory non-handed and become handed when field installed to fit the scope of the project. The handle pulls located on each side of the door are color matched to the trim to create a uniform style. And with the threshold free design, the sliding door offers better aesthetics and safety by eliminating the potential for tripping.


General Guidelines for Use of Sliding Door (page 21)

- The system requires the ordering of both a door and a mounting bracket kit.
- All doors are 42" wide to accommodate a 36"W opening and are non-handed .
- A mounting bracket kit must be ordered for each door corresponding to the mounting panels width (30", 36", 42", or 48"W). Kits available in P1 and P2 paint.


General Guidelines for Layout Planning of Sliding Door

- Stability guidelines must be followed when specifying a sliding door. (Refer to page 15). The sliding door system was designed to close an opening in a run of parallel panels. Doors mounted to long runs of panels without floor support, ties to worksurfaces, or return panels may seem less stable.
- If the door is used to close an opening **(A)** where the panel opposite the door is at 90°, there will be a gap equal to the panel thickness between the door and the panel end when closed.
- When planning the layout, care must be taken if the plan includes a door mounted on a panel that is less than 42" W. If the panel is at a corner **(B)**, the door will protrude into the aisle or next workstation when in the open position.
- If back-to-back doors are mounted on panels **(C)** that are less than 42" W they will interfere with each other if both are open at the same time.
- The door is attached at the base of the panel at any end position with a wrap around bracket. Bracket kits are ordered in conjunction with appropriate end trim profiles. The slots at the base of the panel must be clear **(D)** and cannot be utilized by worksurface supports or panel hung components.
- If the door is mounted to a panel run that is positioned adjacent to a wall **(E)** or an inside 90° angle and there is not a 42" clearance between the track and the wall/inside 90° the assembly of the first stop will be difficult and plans will need to be modified for the assembly.
- If a door is closing an opening of a workstation that includes a "T" connector in the opposite wall, an extended straight connector may need to be used to maintain the 36" required opening.

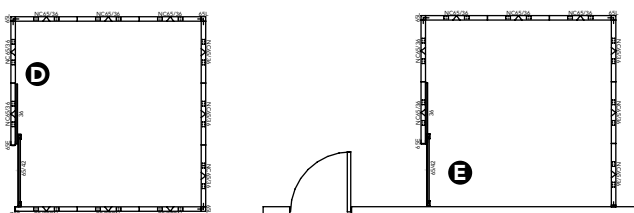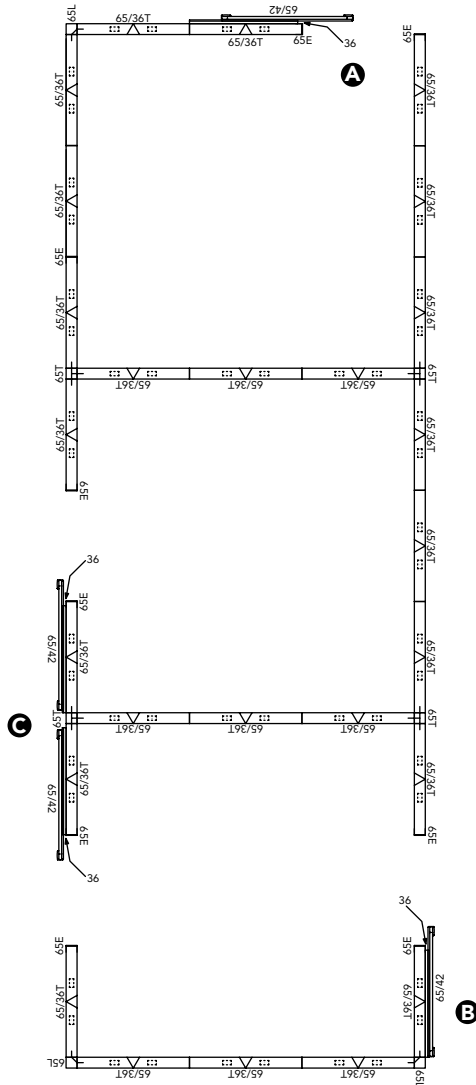




Description	Model Without Top Trim	List Price Without Top Trim					
		Grade A	Grade B	Grade C	Grade D	Grade E	Grade F
35"H Tackable Panel							
24"W	P13524TP 	\$ 321	\$ 356	\$ 391	\$ 477	\$ 583	\$ 653
30"W	P13530TP 	\$ 349	\$ 387	\$ 423	\$ 519	\$ 633	\$ 707
36"W	P13536TP 	\$ 388	\$ 429	\$ 469	\$ 576	\$ 704	\$ 788
42"W	P13542TP 	\$ 399	\$ 442	\$ 482	\$ 591	\$ 722	\$ 809
48"W	P13548TP 	\$ 427	\$ 472	\$ 520	\$ 636	\$ 778	\$ 871
60"W	P13560TP	\$ 480	\$ 532	\$ 586	\$ 722	\$ 886	\$ 994
72"W	P13572TP	\$ 608	\$ 673	\$ 740	\$ 904	\$ 1107	\$ 1242




42½"H Tackable Panel

24"W	P14224TP	S	\$ 338	\$ 375	\$ 410	\$ 503	\$ 612	\$ 688
30"W	P14230TP	S	\$ 378	\$ 418	\$ 457	\$ 559	\$ 683	\$ 766
36"W	P14236TP	S	\$ 424	\$ 468	\$ 513	\$ 627	\$ 766	\$ 858
42"W	P14242TP	S	\$ 465	\$ 514	\$ 563	\$ 687	\$ 838	\$ 938
48"W	P14248TP	S	\$ 497	\$ 549	\$ 603	\$ 738	\$ 900	\$ 1008
60"W	P14260TP		\$ 576	\$ 639	\$ 702	\$ 863	\$ 1053	\$ 1181
72"W	P14272TP		\$ 664	\$ 735	\$ 806	\$ 988	\$ 1206	\$ 1351




50"H Tackable Panel

24"W	P15024TP	S	\$ 372	\$ 411	\$ 450	\$ 550	\$ 670	\$ 753
30"W	P15030TP	S	\$ 416	\$ 459	\$ 503	\$ 616	\$ 752	\$ 841
36"W	P15036TP	S	\$ 469	\$ 518	\$ 568	\$ 694	\$ 845	\$ 946
42"W	P15042TP	S	\$ 521	\$ 576	\$ 630	\$ 770	\$ 937	\$ 1049
48"W	P15048TP	S	\$ 562	\$ 621	\$ 680	\$ 832	\$ 1014	\$ 1134
60"W	P15060TP		\$ 612	\$ 678	\$ 746	\$ 915	\$ 1121	\$ 1255
72"W	P15072TP		\$ 746	\$ 824	\$ 905	\$ 1106	\$ 1350	\$ 1511



65"H Tackable Panel

24 "W	P16524TP		\$ 406	\$ 448	\$ 491	\$ 599	\$ 732	\$ 818
30 "W	P16530TP		\$ 460	\$ 508	\$ 557	\$ 680	\$ 827	\$ 928
36 "W	P16536TP		\$ 516	\$ 571	\$ 624	\$ 761	\$ 927	\$ 1036
42 "W	P16542TP		\$ 573	\$ 633	\$ 693	\$ 846	\$ 1030	\$ 1151
48 "W	P16548TP		\$ 604	\$ 668	\$ 732	\$ 893	\$ 1088	\$ 1217
60 "W	P16560TP		\$ 661	\$ 732	\$ 805	\$ 988	\$ 1208	\$ 1355
72 "W	P16572TP		\$ 820	\$ 905	\$ 995	\$ 1216	\$ 1480	\$ 1657



15"H Stacking Panel — Fabric

24"W	P21524T		\$ 233	\$ 257	\$ 268	\$ 323	\$ 369	\$ 439
30"W	P21530T		\$ 257	\$ 283	\$ 295	\$ 357	\$ 408	\$ 486
36"W	P21536T		\$ 285	\$ 315	\$ 327	\$ 397	\$ 455	\$ 539
42"W	P21542T		\$ 309	\$ 341	\$ 353	\$ 429	\$ 491	\$ 583
48"W	P21548T		\$ 332	\$ 366	\$ 380	\$ 462	\$ 529	\$ 627
60"W	P21560T		\$ 450	\$ 494	\$ 516	\$ 628	\$ 718	\$ 853
72"W	P21572T		\$ 478	\$ 525	\$ 548	\$ 667	\$ 763	\$ 906

E All Optimize models are available in the **Everyday Advantage**® program, see page 9 for details.

How to specify —
Select the
Model Number
from above.

1st Option:

Panel Fabric:
See inside back
cover for fabric

Limited selection for
72"W models.

2nd Option:

Paint:

☐ P1 ☐ P2

See inside front
cover for finishes.

For P2 paints — add \$39.

P | | | | | | | . | | | | | | | . | | |

Examples: P13524TP.ECH901.P7B P16572TP.APN911.P7B

S *Shippable by small-package carrier.*






Description/Examples	Model	List Price
Painted Top Trim for Tackable and Non-Tackable Panels (Examples span multiple panels)		
24" W	P1TC24	\$ 26
30" W	P1TC30	\$ 27
36" W	P1TC36	\$ 28
42" W	P1TC42	\$ 29
48" W— 24" + 24"	P1TC48	\$ 34
60" W— 30" + 30" or 24" + 36"	P1TC60	\$ 38
72" W— 36" + 36" or 24" + 48"	P1TC72	\$ 49

E All Optimize models are available in the **Everyday Advantage®** program, see page 9 for details.

How to specify — Select the Model Number from above.	1st Option: Paint: See inside front cover for finishes.
P 1 T C .	Example: P1TC24.P7B

Shippable by small-package carrier.



Description	15"H		30"H	15"H List Price		30"H List Price		
	Model		Model	Clear	Frosted	Clear	Frosted	
Stacking Panel — Glazed								
24"W	P21524G	S	P23024G	S	\$ 429	\$ 471	\$ 733	\$ 799
30"W	P21530G	S	P23030G	S	\$ 451	\$ 495	\$ 800	\$ 872
36"W	P21536G	S	P23036G	S	\$ 504	\$ 554	\$ 868	\$ 945
42"W	P21542G	S	P23042G	S	\$ 582	\$ 639	\$ 920	\$ 1001
48"W	P21548G	S	P23048G	S	\$ 649	\$ 713	\$ 967	\$ 1052
60"W	P21560G	S	P23060G	S	\$ 692	\$ 759	\$ 1031	\$ 1125
72"W	P21572G		N/A		\$ 735	\$ 807	N/A	N/A

Description	Model Without Top Trim	List Price Without Top Trim					
		Grade A	Grade B	Grade C	Grade D	Grade E	Grade F
50"H Tackable Glazed Panel w/15"H Clear Glass							
24"W	P15024HP S	\$ 625	\$ 690	\$ 754	\$ 918	\$ 1118	\$ 1250
30"W	P15030HP S	\$ 681	\$ 751	\$ 822	\$ 1002	\$ 1218	\$ 1361
36"W	P15036HP S	\$ 744	\$ 820	\$ 898	\$ 1094	\$ 1329	\$ 1486
42"W	P15042HP S	\$ 813	\$ 895	\$ 982	\$ 1196	\$ 1451	\$ 1622
48"W	P15048HP S	\$ 849	\$ 937	\$ 1026	\$ 1251	\$ 1518	\$ 1699
60"W	P15060HP	\$ 972	\$ 1074	\$ 1177	\$ 1438	\$ 1751	\$ 1958
72"W	P15072HP	\$ 1186	\$ 1310	\$ 1434	\$ 1748	\$ 2124	\$ 2374

50"H Tackable Glazed Panel w/15"H Frosted Glass								
24"W	P15024HP		\$ 690	\$ 755	\$ 819	\$ 983	\$ 1183	\$ 1315
30"W	P15030HP		\$ 751	\$ 821	\$ 892	\$ 1072	\$ 1288	\$ 1431
36"W	P15036HP		\$ 820	\$ 896	\$ 974	\$ 1170	\$ 1405	\$ 1562
42"W	P15042HP		\$ 895	\$ 977	\$ 1064	\$ 1278	\$ 1533	\$ 1704
48"W	P15048HP		\$ 937	\$ 1025	\$ 1114	\$ 1339	\$ 1606	\$ 1787
60"W	P15060HP		\$ 1074	\$ 1176	\$ 1279	\$ 1540	\$ 1853	\$ 2060
72"W	P15072HP		\$ 1310	\$ 1434	\$ 1558	\$ 1872	\$ 2248	\$ 2498

65"H Tackable Glazed Panel w/15"H Clear Glass								
24"W	P16524HP		\$ 682	\$ 752	\$ 823	\$ 1003	\$ 1219	\$ 1362
30"W	P16530HP		\$ 739	\$ 815	\$ 891	\$ 1086	\$ 1321	\$ 1476
36"W	P16536HP		\$ 811	\$ 893	\$ 979	\$ 1193	\$ 1448	\$ 1618
42"W	P16542HP		\$ 886	\$ 976	\$ 1068	\$ 1301	\$ 1581	\$ 1765
48"W	P16548HP		\$ 925	\$ 1021	\$ 1117	\$ 1360	\$ 1653	\$ 1848
60"W	P16560HP		\$ 1061	\$ 1171	\$ 1285	\$ 1568	\$ 1907	\$ 2135
72"W	P16572HP		\$ 1292	\$ 1426	\$ 1562	\$ 1902	\$ 2312	\$ 2584

65"H Tackable Glazed Panel w/15"H Frosted Glass								
24"W	P16524HP		\$ 752	\$ 822	\$ 893	\$ 1073	\$ 1289	\$ 1432
30"W	P16530HP		\$ 815	\$ 891	\$ 967	\$ 1162	\$ 1397	\$ 1552
36"W	P16536HP		\$ 893	\$ 975	\$ 1061	\$ 1275	\$ 1530	\$ 1700
42"W	P16542HP		\$ 976	\$ 1066	\$ 1158	\$ 1391	\$ 1671	\$ 1855
48"W	P16548HP		\$ 1021	\$ 1117	\$ 1213	\$ 1456	\$ 1749	\$ 1944
60"W	P16560HP		\$ 1171	\$ 1281	\$ 1395	\$ 1678	\$ 2017	\$ 2245
72"W	P16572HP		\$ 1426	\$ 1560	\$ 1696	\$ 2036	\$ 2446	\$ 2718

E All Optimize models are available in the **Everyday Advantage®** program, see page 9 for details.


How to specify — Select the Model Number from above.	<i>1st Option:</i> Panel Fabric (if applicable): See inside back cover for fabrics. Limited selection for 72"W models.	<i>2nd Option:</i> Paint: P1 P2 See inside front cover for finishes. For P2 paints on stacking and base panels — add \$39.	<i>3rd Option:</i> Glass (if applicable): C Clear F Frosted
P 		. . .	. . .

Examples: P21572G.P7B.F P16524HP.ECH901.P7B.C

S *Shippable by small-package carrier.*

Optimize™ — Screens and Doors

GSA SIN 711-1

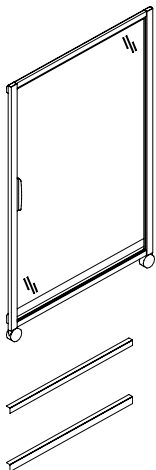


Mounting Kit for Sliding Doors (mounts to adjacent Optimize panel)				
30"W	P1DMK30	S	\$ 324	\$ 340
36"W	P1DMK36	S	\$ 324	\$ 340
42"W	P1DMK42	S	\$ 324	\$ 340
48"W	P1DMK48	S	\$ 324	\$ 340

How to specify — Select the Model Number from above.	1st Option: Paint: P1 P2 See inside front cover for finishes.	2nd Option: Glass — Screen Only (if applicable): C Clear F Frosted	2nd Option: Laminate — Door Only (if applicable): See inside front cover for finishes.	2nd Option: Insert — Sliding Door Only (if applicable): FT Frosted Translucent
	.			F T


S *Shippable by small-package carrier.*

For specification information see pages 13-17.


GSA SIN 711-1




Description	Model	List Price
Inline Connector Kits		
Single Connector Strap and Hardware	P3CONTT S	\$ 67




Description	Model	P1 List Price	P2 List Price
"L" 90° Connector Kit			
35"H	P3CONL35 S	\$ 102	\$ 141
42½"H	P3CONL42 S	\$ 102	\$ 115
50"H	P3CONL50 S	\$ 126	\$ 139
57½"H	P3CONL57 S	\$ 126	\$ 139
65"H	P3CONL65 S	\$ 126	\$ 139
72½"H	P3CONL72	\$ 134	\$ 145
80"H	P3CONL80	\$ 144	\$ 157



"T" 3-Way Connector Kit			
35"H	P3CONT35 S	\$ 183	\$ 196
42½"H	P3CONT42 S	\$ 183	\$ 196
50"H	P3CONT50 S	\$ 198	\$ 211
57½"H	P3CONT57 S	\$ 198	\$ 211
65"H	P3CONT65 S	\$ 198	\$ 211
72½"H	P3CONT72	\$ 222	\$ 233
80"H	P3CONT80	\$ 239	\$ 252



"X" 4-Way Connector Kit			
35"H	P3CONX35 S	\$ 183	\$ 196
42½"H	P3CONX42 S	\$ 183	\$ 196
50"H	P3CONX50 S	\$ 198	\$ 211
57½"H	P3CONX57 S	\$ 198	\$ 211
65"H	P3CONX65 S	\$ 198	\$ 211
72½"H	P3CONX72	\$ 222	\$ 233
80"H	P3CONX80	\$ 239	\$ 252



"S" Extended Straight Connector Kit			
35"H	P3CONS35 S	\$ 265	\$ 286
42½"H	P3CONS42 S	\$ 265	\$ 286
50"H	P3CONS50 S	\$ 322	\$ 343
57½"H	P3CONS57 S	\$ 322	\$ 343
65"H	P3CONS65 S	\$ 322	\$ 343
72½"H	P3CONS72	\$ 370	\$ 389
80"H	P3CONS80	\$ 399	\$ 420

E All Optimize models are available in the **Everyday Advantage®** program, see page 9 for details.

How to specify —

Select the Model Number from above.

1st Option:

Paint
(if applicable):

P1 P2

See inside front cover for finishes.

P3CON | | | | . | | |

Examples: P3CONTT P3CONL35.P02

S Shippable by small-package carrier.

Panels

Optimize™ — Connector Kits

For specification information see pages 13-17.

GSA SIN 711-1

		P1	P2
Description	Model	List Price	List Price
Panel End Trim			
35"H	P335PV	\$ 70	\$ 91
42½"H	P342PV	\$ 70	\$ 91
50"H	P350PV	\$ 74	\$ 95
57½"H	P357PV	\$ 74	\$ 95
65"H	P365PV	\$ 74	\$ 95
72½"H	P372PV	\$ 86	\$ 105
80"H	P380PV	\$ 93	\$ 114

Variable Height Connector Kit — Post Trim

7½"H	P3CONVH07	\$ 68	\$ 89
15"H	P3CONVH15	\$ 68	\$ 89
22½"H	P3CONVH22	\$ 75	\$ 96
30"H	P3CONVH30	\$ 75	\$ 96

Inline Variable Height End Trim Finish Kit

7½"H	P3VH07P	\$ 68	\$ 89
15"H	P3VH15P	\$ 68	\$ 89
22½"H	P3VH22P	\$ 75	\$ 96
30"H	P3VH30P	\$ 75	\$ 96

Wall Mount Kit

35"H	P335W	\$ 150	\$ 171
42½"H	P342W	\$ 150	\$ 171
50"H	P350W	\$ 163	\$ 184
57½"H	P357W	\$ 163	\$ 184
65"H	P365W	\$ 163	\$ 184
72½"H	P372W	\$ 187	\$ 206
80"H	P380W	\$ 201	\$ 222

2-Way 120° Connector

35"H	P3CONB35	\$ 183	\$ 195
42½"H	P3CONB42	\$ 183	\$ 195
50"H	P3CONB50	\$ 193	\$ 205
57½"H	P3CONB57	\$ 199	\$ 211
65"H	P3CONB65	\$ 199	\$ 211
72½"H	P3CONB72	\$ 229	\$ 240
80"H	P3CONB80	\$ 239	\$ 251

3-Way 120° Connector

35"H	P3CONC35	\$ 183	\$ 195
42½"H	P3CONC42	\$ 183	\$ 195
50"H	P3CONC50	\$ 193	\$ 205
57½"H	P3CONC57	\$ 199	\$ 211
65"H	P3CONC65	\$ 199	\$ 211
72½"H	P3CONC72	\$ 229	\$ 240
80"H	P3CONC80	\$ 239	\$ 251

E All Optimize models are available in the **Everyday Advantage®** program, see page 9 for details.

How to specify —
Select the
Model Number
from above.

1st Option:


Paint
(if applicable):

P1 P2
See inside front
cover for finishes.

P3 .

Examples: P3CONVH15.P02 P335W.P02

Optimize features capabilities for cable management, including electrical, voice, and data. The 8-wire electrical system can be integrated at base pathway. The frame allows voice and data cables to be routed horizontally in the base pathway.

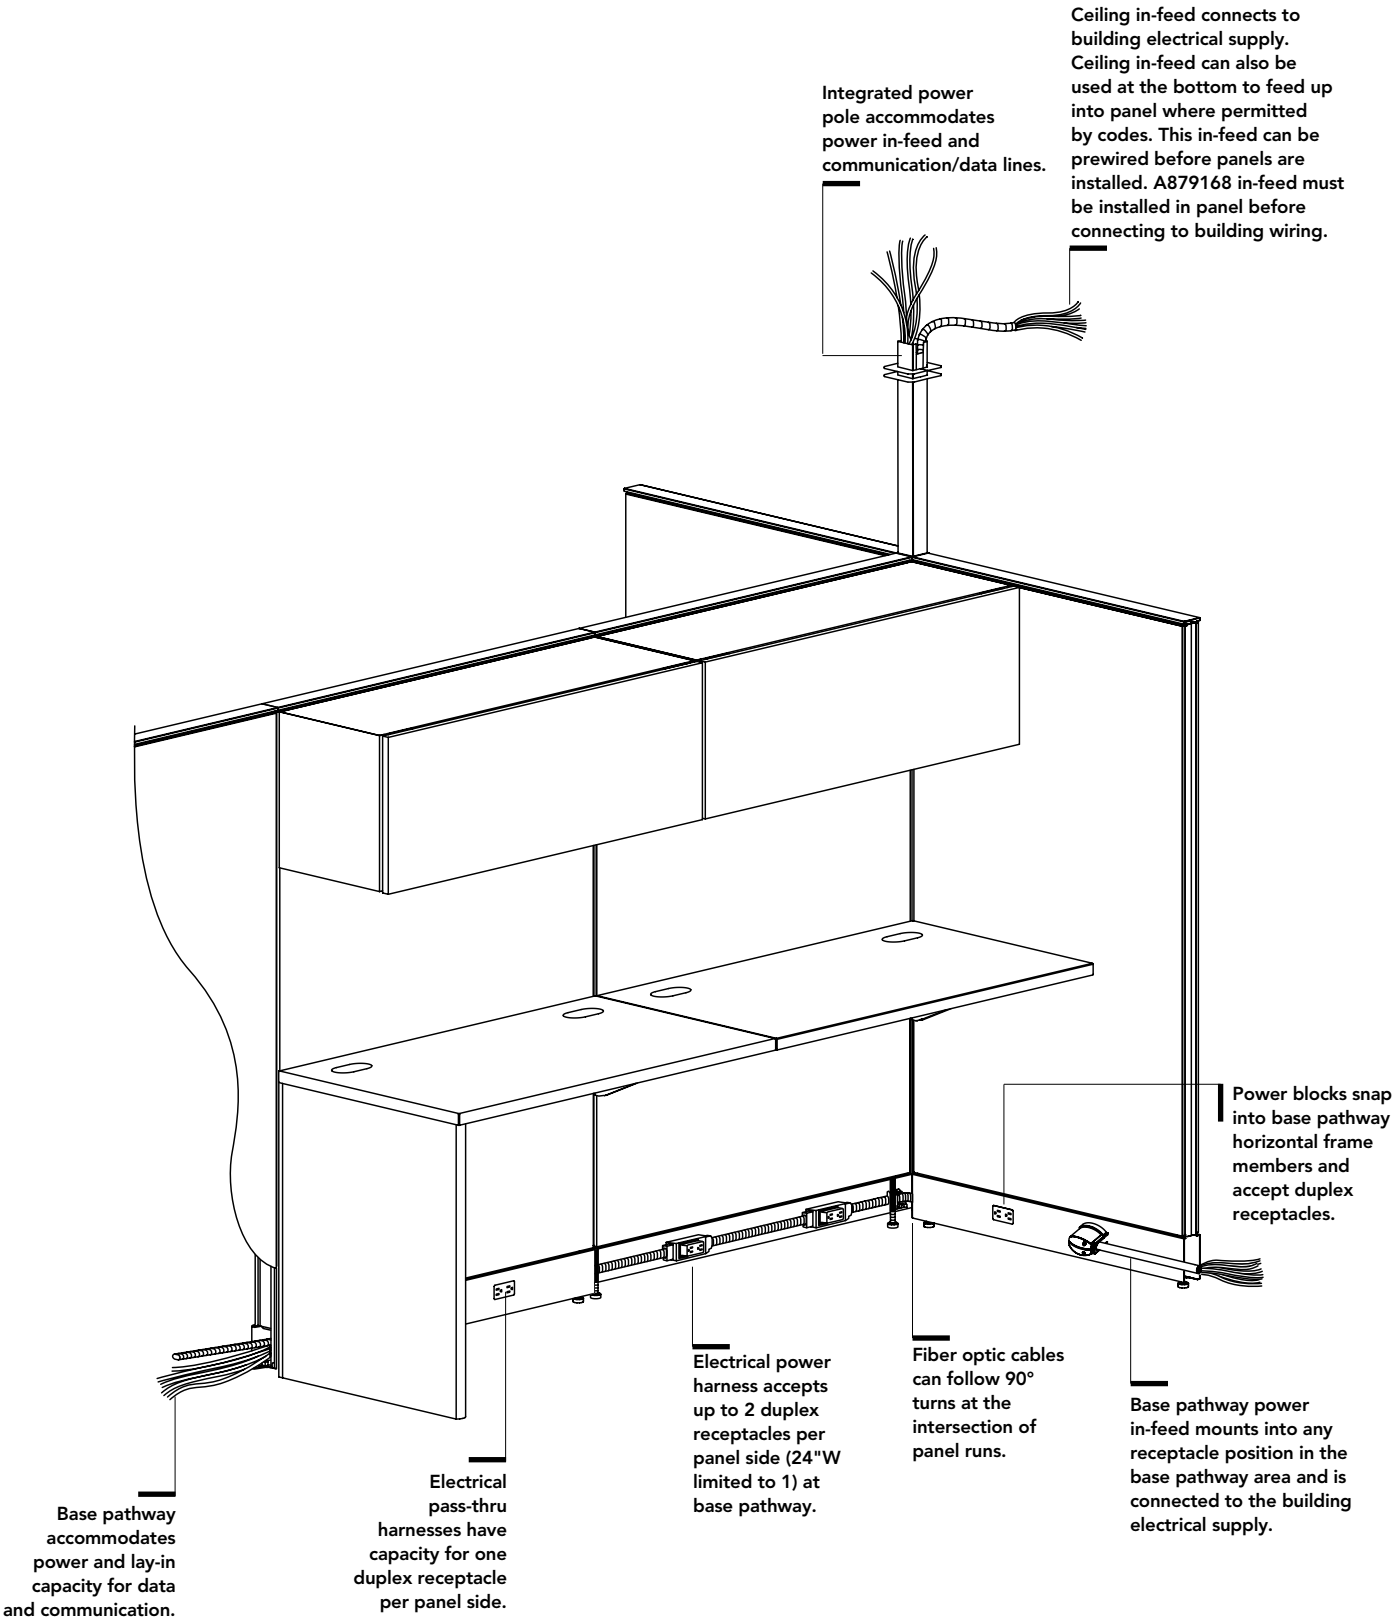

Electrical Systems

Optimize Electrical Systems


Optimize offers a choice of four electrical systems:

- Four-circuit, 3 + 1
- Four-circuit, 2 + 2
- Three-circuit, separate neutrals
- Eight circuits; two four-circuit systems provided back-to-back.
- See pages 26-27 for a detailed explanation of each electrical system.
- All four systems utilize an 8-wire electrical system, rated at 20 amps per circuit (15 amps Canadian).
- Optimize panels and electrical components are UL Listed. Electrical components are also CSA certified.
- Installation and use of the electrical system, the number of receptacles used on a given circuit, and connections to the building power supply should be in compliance with all local and national electrical codes.

Caution: Electrical equipment cords or extension cords MUST NOT BE ROUTED through panels.

Hardwire Junction Box – New York Code (page 33)

- Hardwire (New York Code) junction box (model A871400) is used when local electrical codes require hardwire entry.
- For use in panels 30"W to 72"W.
- When used in 30"W and 36"W panels, power can be routed only in one direction.
- When used in 42" and wider panels, an electrical pass-thru cable or harness for that panel width can be used to route power back in the opposite direction.
- Unit must connect to a power or pass-thru harness positioned in the base pathway area of an adjacent panel.
- Customer to furnish all cabling and wiring from power entry to power source.
- Junction box can be positioned at any duplex receptacle location.



Hardwire Wiring Harness – Chicago Code (page 33)


- Hardwire (Chicago Code) wiring harnesses and snap connectors are not allowed in Chicago — base pathways must be comprised of all metallic components.
- The base pathway junction box (model A871500) clips direct into receptacle locations for single sided applications.
- Customer must furnish conduit, wiring, and designer-type receptacles for the base pathway.
- Power entry can be routed from the ceiling, via an Optimize power pole, or from the floor into a junction box (model A871500).

Electrical In-Feeds

- Power in-feed cables deliver power from building to panel's electrical system.
- In-feed cables are housed in conduit to separate electrical system from communications and data lines.
- Select quantity of base or ceiling in-feed cables depending on individual power requirements.


Base Pathway Power In-feed (page 33)

- Sealtight base pathway power in-feed mounts into any receptacle position in the base pathway area.
- A heavy rubber sheathing shields conduit, allowing in-feed to be exposed.




Ceiling Power In-feed (page 33)

- Ceiling power in-feed connects to a prewired electrical harness in the base pathway, traverses through an adjacent panel, and terminates in the junction box at the top of the integrated power pole.
- Use integrated power pole model P278PP.
- Most codes allow flex conduit to be exposed after installation. Verify code requirements before ordering for exposed application.



Integrated Power/Communication Pole (page 33)

- Integrated power pole accommodates ceiling power in-feed and communication/data lines.
- Provide capacity for routing power in-feed and cables to the base pathway of a panel.
- Conduit of the in-feed cable serves as the division of electrical and communications cabling.
- Installs into 42½"-65"H or 15"H stacking 90°, "T", and "X" connections.
- Integrated power pole includes trim kit.
- Single cavity with removable cover.
- Field-cut to desired length.
- Outside Dimension: 2" square.
- When using a ceiling power in-feed, consider that the in-feed must connect into an electrical harness located in an adjacent panel. (See page 33 for cable capacity.)
- To power the prewired electrical system, from a ceiling power source, a ceiling in-feed cable, Model A871912, A871912C, A871912A, A871912AC, A871918, A871918C, A871918A, or A871918AC must be purchased separately.
- For applications requiring longer integrated power poles, a 156"H model is available.



Integrated Power and Communications Pole

Electrical & Data

To Order:

1. Determine which electrical system you will use after consulting your electrician and computer support personnel:
 - The four-circuit system (4-Hot/2-Neutral/2-Ground)
 - 3 + 1 option
 - 2 + 2 option
 - The three-circuit system (3-Hot/3-Neutral/2-Ground)
 - The eight-circuit system (back-to-back four-circuit systems)
2. Determine location, quantity, and circuit of duplexes.
3. Determine the appropriate choice and use of isolated, isolated/dedicated, and separate neutrals circuits.
4. Specify appropriate power harnesses* and pass-thru cables.*
5. Determine the location, quantity, and type of power in-feed needed.


* Select power harness models (A8712XX), pass-thru cables (A8710XX), and pass-thru harness (A8711XX) with the last two digits corresponding with the panel width into which the component is to be positioned. The initial cable length can be stretched approximately 3" to transverse "T", "X", "L", and extended straight connectors.

Flexconnect™ Electrical System Options


The four-circuit, eight-wire electrical system is widely specified and trusted by hundreds of thousands of end-users. This proven system delivers four circuits for every power infeed in either a 3 + 1 or 2 + 2 configuration. The isolated/dedicated circuits are ideal for sensitive computing equipment, while the common circuits are suitable for faxes, copiers, task lights and other peripherals. Both the 3 + 1 and 2 + 2 systems use the same pre-wired components, making it easy to adjust as electrical needs change.

You can also choose a three-circuit, eight-wire system that has a dedicated neutral for every hot circuit. The three-circuit components have model numbers with an "A" suffix and appear in a gray box in this pricer.


Four-circuit, 3 + 1 Receptacle Option

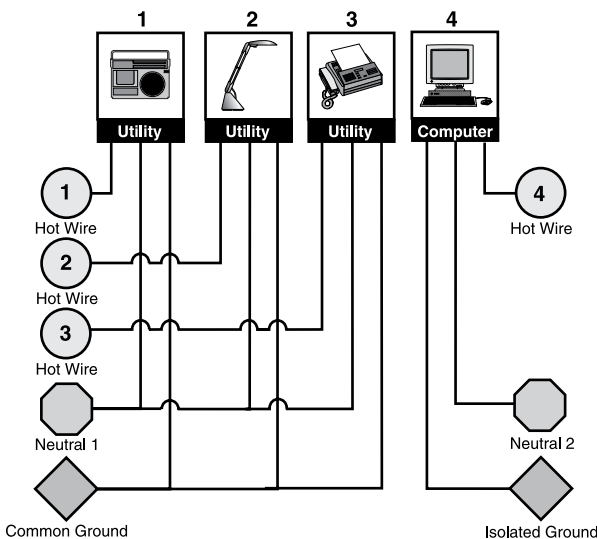


The 3 + 1 option is the electrical standard used on Allsteel systems for many years in most installations. This wiring option provides three utility circuits plus an isolated/dedicated circuit for more sensitive equipment. Circuit 2 (one of the 3 common circuits sharing a neutral wire) cannot be used with single-phase building electrical supply.

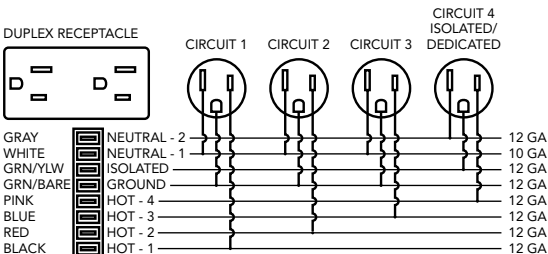


Four-circuit, 2 + 2 Receptacle Option

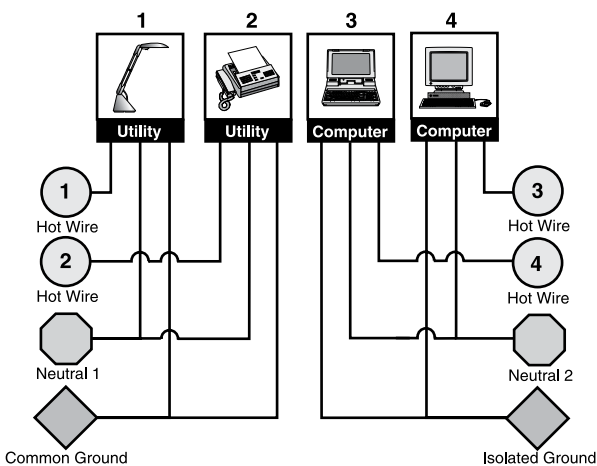


The 2 + 2 option is a wiring option that provides two utility circuits and two isolated circuits for more extensive computer usage applications.

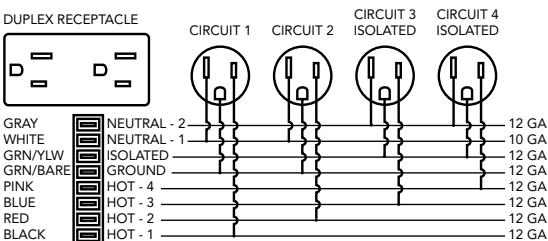

Three-circuit, separate neutrals

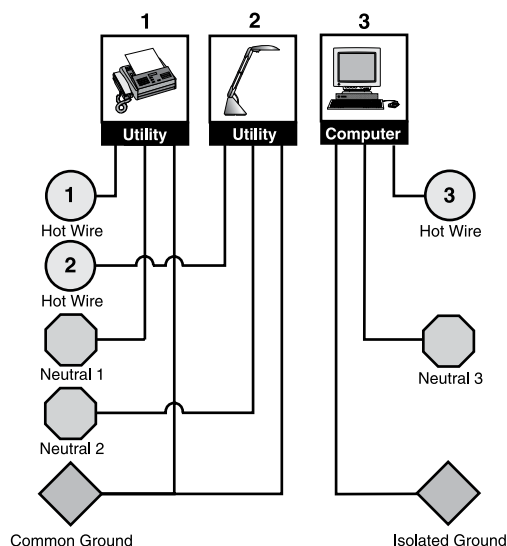

The three-circuit, separate neutrals configuration is a wiring option that provides separate neutrals for each of the three circuits. Two circuits share a common ground, and one circuit is isolated/dedicated. The three-circuit components have model numbers with an "A" suffix.

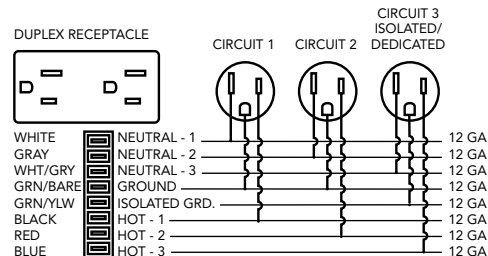

Optimize System Receptacle Usage

Two 8-wire, 20 amp (15 amp Canadian) electrical systems are offered					
Electrical System	Circuitry	Receptacle Capacity			
Four-circuit 4-Hot/2-Neutral/2-Ground	3 + 1	Common Circuit-1 A871501	Common Circuit-2 ⁽¹⁾ A871502	Common Circuit-3 A871503	Iso/Dedicated Circuit-4 A871504
	2 + 2	Common Circuit-1 A871501	Common Circuit-2 A871502	Isolated Circuit-3 A871506	Isolated Circuit-4 A871504
Three-circuit 3-Hot/3-Neutral/2-Ground	w/separate neutrals	Common Circuit-1 A871501A	Common Circuit-2 A871502A	Iso/Dedicated Circuit-3 A871503A	N/A

(1) Circuit 2 (one of the 3 common circuits sharing a neutral wire) cannot be used with a single-phase building electrical supply.


Notes:

- Four-circuit components and three-circuit components (with suffix "A") cannot be used together.
- Components of the two systems are keyed differently to prevent components of one system being connected to components of another system.
- Allsteel Model Numbers are printed on the UL labels, and components are color-coded to provide visual identification of the different components.
- Four-circuit components have black plastic parts.
- Three-circuit components have rust-colored terminal ends and receptacle backs are rust colored.


Typical power usage by the most commonly specified office equipment.

EQUIPMENT	AMPS	EQUIPMENT	AMPS	EQUIPMENT	AMPS
Computers		Copiers		Fax Machines	
Personal Computer.....	3	Desktop Copier	15	InkJet Fax	less than 1
Notebook Computer	3	Console Copier	20	Plain Paper Fax	8
Monitors		Copier/Duplicator		Task Lights	
13" Color Monitor	2	Printers		30" T5 Fluorescent	0.12/bulb
17" Color Monitor	3	InkJet	less than 1	60" T5 Fluorescent	0.24/bulb
21" Color Monitor	4	Personal Laser or LED	8	<i>Source: Industry Analysis, Inc., Rochester, NY</i>	
15" Plasma Monitor	0.5	Workgroup Laser or LED	15		
20" Plasma Monitor	1				

Duplex Receptacles





15 amp Receptacle


20 amp Receptacle
(Required by some large copiers.)

Power Harnesses, Pass-Thru Harnesses, and Dual Electrical Harnesses

Electrical power harnesses are used to distribute power in Optimize panels. Harness power blocks snap directly onto brackets in base pathway. Power blocks on electrical power harness and pass-thru harness accept duplex receptacles.




Electrical Power Harness



Electrical Pass-Thru Harness With Power Block




Electrical Pass-Thru Harness Without Power Block




Dual Electrical Eight-circuit Power Harness Kit

All electrical power harnesses and pass-thru harnesses (except 20"W) will stretch 3½", allowing them to span "T", "X", "120°" intersections, and "S" extended straight connections.

Note: "T" intersections require a minimum of one power harness and "X" intersections requires a minimum of two power harnesses.



Requires minimum of one power harness.



Requires minimum of two power harnesses.

Use of a ceiling in-feed at this location requires an additional power harness.

Electrical Power Harnesses (page 32)

- Electrical power harnesses are used to distribute power in panels.
- Optimize electrical can only be located at base pathway.
- Specify harness length to match panel width.
- 24" power harness accepts one receptacle on each side of the harness, all other length power harnesses have power blocks to accept four duplex receptacles (two on each side of panel).
- Connectors at both ends of power harnesses allow power distribution in either direction.
- Harness power blocks snap directly onto brackets in base pathway.
- Use of a ceiling in-feed requires one additional harness.

Electrical Pass-thru Harness With Power Block (page 32)

- Electrical pass-thru harness with power block have capacity to handle one duplex receptacle on each side of the panel when exposed.
- Specify harness length to match panel width or combined panel widths.
- Power harnesses accept one duplex receptacle per panel side.
- Note: "T" intersections require a minimum of one power harness and "X" intersections requires a minimum of two power harnesses.
- All electrical power harnesses and pass-thru harnesses with power block will stretch 3½", allowing them to span "T", "X", "A" intersections, and "S" extended straight connections.

Electrical Pass-thru Harnesses Without Power Block (page 32)

- Specify harness length to match panel width or combined panel widths.
- Electrical pass-thru cables distribute power through any panel(s) where receptacles are not required. Cable length cannot be stretched.

Dual Electrical Eight-Circuit Power Harness Kits (page 32)

- Kit provides back-to-back four-circuit systems giving double the capacity of harness and pass-thru cables.
- Specify harness length to match panel width.
- Requires two four-circuit in-feeds.
- Uses four-circuit receptacles.
- Models must be positioned back-to-back in the panel — single-side use is not permitted.
- Components can only be routed in a single run — a single run can branch to single panel runs at "T" and "X" junctions.
- Standard four-circuit pass-thru cables (A8710xx) can be used in between power harnesses. Two are required in the back-to-back configurations.
- Models can be connected to standard four-circuit power harnesses and pass-thrus, although it is not recommended because of possible circuit number ambiguity.
- Two power in-feeds are required to connect the back-to-back runs. Power A8719xx must be connector to a power block at the end of a run.
- Data faceplates and terminals cannot be positioned in a panel into which back-to-back power harnesses are installed
- Power in-feeds A8719xx must be routed from a panel wherein no power harness is positioned, into an adjacent panel where a power harness is positioned and connected to the end of a power block.

Receptacles




Duplex Receptacle

Receptacle Color Recommended to Coordinate with Paint Color

Paint Color	Receptacle Color
Brilliant White — PQ8	White — EW
Carob — P52	Black — E4
Champagne Metallic — PR5	Muslin — EU
Fossil — P28	Flint — E9
Gunmetal Metallic — PR3	Brownstone — EY
Parchment — P93	Muslin — EU
Platinum Metallic — PR2	Loft — EV



Pull-Up Receptacle



Power/Data Dome

Duplex Receptacles (page 33)

- Duplex receptacles snap into power blocks of power harnesses or pass-through harnesses with blocks.
- Duplexes are available in multiple colors. See inside front cover for finishes.
- Each receptacle is labeled to indicate which circuit it will be connected to: 1, 2, 3, or 4.
- Duplexes are model specific to support either 3+1 and 2+2 electrical in-feed; or have an "A" suffix and are design to support a three-circuit separate neutral electrical in-feed.


Pull-up Receptacle (page 34)

- Mounts in worksurface grommet holes, providing three receptacles to the worksurface.
- Integral 15 amp circuit breaker and 6' cord w/plug included.
- Pull up receptacles may interfere with the placement of pedestals
- Included grommet may not match Allsteel worksurface grommets.


Power/data Dome (page 34)

- Fits into existing grommet hole (HPL only) to provide two surface mounted simplex receptacles and two data ports.
- Mounts in worksurface grommet holes or into field-cut, 2¼" diameter hole.
- 6' black power cord.
- May interfere with the placement of optional pedestals.
- Unit has two receptacles to the worksurface plus data ports.
- Includes adapters to allow us of commercially available data terminals or blanks to fill unused openings.
- Many of the AMP, AT&T, Krone, Leviton, and most commercial data terminals can be used.
- Data terminals must be of a design that will snap into .695 x .650, .590 x .790, or .590 x .750 openings in .064 maximum thick faceplate.
- For additional corded with plug solutions see page 107.


Data Components




Voice/Data Receptacles




ATADF3



ATADF4



AMP Components



Base Pathway Cover

Data Faceplates (page 34)

- Optimize not only provides space for large volumes of voice and data cables, it also offers several means of mounting commercially available voice and data components.
- Commercially available modular data faceplates can be mounted in vacant base receptacle openings.
- Due to panel depth, back-to-back data modules should not be used at the base on Optimize.


AMP® NETCONNECT® Components (page 34)

- AMP NETCONNECT® Components are supported by AMP's 25 year warranty, including reconfiguration.

Optimize Base Pathway Covers (page 34)

- Features an additional knockout (offset) for improved utilization of power and data. Knockouts are 2.700" W x 1.377" H up to 60" W.
- Due to panel depth, back-to-back data modules should not be used in the base on Optimize.

Cable and Wire Management

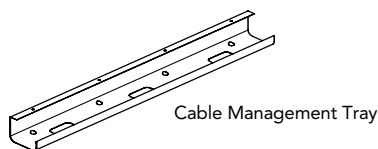


Cable Management Tray




Wire Management Channel



Cord Retainer Clip



Wireway Grommet



Receptacle Cover



Cord Organizer

Cable Management Tray (page 34)

- Attaches under the worksurface to contain cables.
- Metal tray shelf is 4" deep. Can hold electrical power strip and/or surge protector.
- 24" and 36" lengths, use multiple units for larger worksurfaces.
- Attachment hardware included, specify paint color.

Wire Management Channel (page 34)

- Self adhesive backing to attach to panels and underside of worksurfaces.
- Flexible strips allow cabling to enter/exit and can be contained inside the 2-cavity profile.
- Each cavity provides space for a maximum of six .22" dia. cables. Total capacity = 1 sq. in.

Cord Retainer Clip (page 34)

- Provides confinement of vertical electrical/data wiring.
- 1½"H cord clips snap into vertical panel slots to contain cords.
- 4 clips are provided standard with each task light cord.
- Package of 50. Available in Black only.

Wireway Grommet (page 34)

- Fits into any receptacle opening.
- Used when routing wires through receptacle opening.


Replacement Receptacle Cover (page 34)

- Fits into unused receptacle opening in base raceway.
- Package of 25. Specify paint color.


Cord Organizer (page 34)

- Attaches to bottom of worksurface.
- 4"W x 7/8"D, made from sheet metal.
- Top sits flush with worksurface if mounted to worksurface.
- 4 cable cut outs: 2 – .250" diameter and 2 – 0.147" diameter; .250" diameter cut outs are centered between the .147" diameter cut outs.

Lighting



Task Lights



LED Undercabinet Light

Task Lights (page 120)


- Task lights can be recessed under storage cabinets or storage shelves, panel-hung, or freestanding.
- Three styles of recessed task lights in four sizes are available to correspond to cabinet or shelf width.
- All styles have 9' power cords in black, connected in the right rear corner.
- All models feature electronic ballast for longer bulb life and cooler operating temperature.
- Task lights with a fused plug to meet Chicago electrical code are also available.

Recommendation: Provide a separate circuit for task lights for proper long-term operation without RF interference to computers that may be in use.

LED Undercabinet Light (page 121)

- LED undercabinet light can be mounted beneath overhead cabinets with wood screws or magnets.

Base Pathway Receptacle Locations

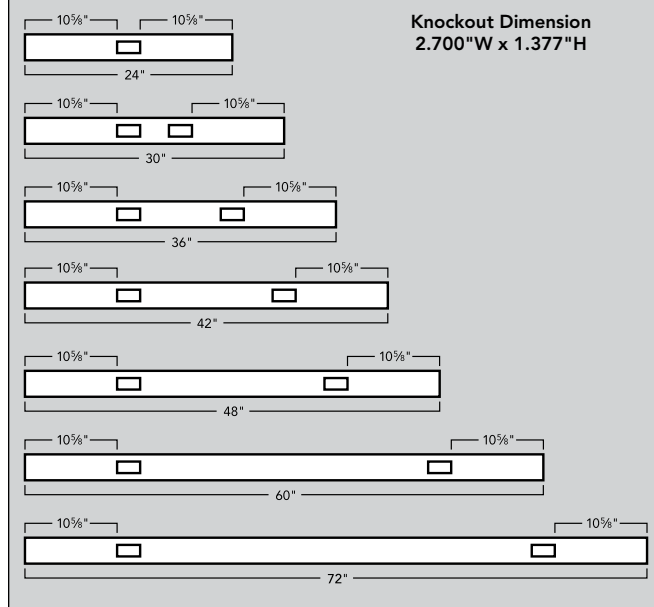

Circuit Usage

Strategy 1

Circuits to Equipment

Assign specific uses for each of the circuits:

- For example, in a four-circuit system:
Circuit 1 — Calculators, fans, etc.
Circuit 2 — Task lights (could be wired to wall switch)
Circuit 3 — CRT or flat screen monitors
Circuit 4 — CPUs






Strategy 2

Circuits to Workstations

Assign specific workstations to each of the three available circuits. Use circuit 4 for power-sensitive electronic equipment.

Placement of pedestals and lateral files may render some duplex locations inaccessible. Pedestal placement may also affect compatibility with pull-up receptacles.

Lay-in Cable Capacity

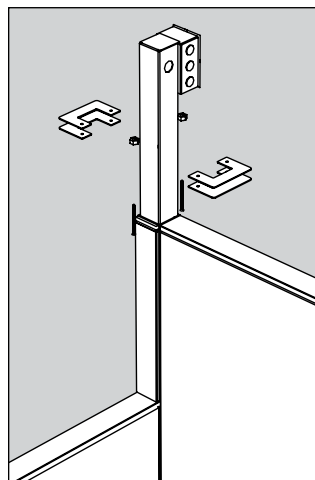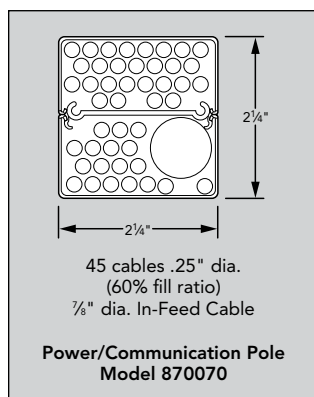




- The base pathway allows continuous voice and data lines to run through and between panels without interruption.
- Lay-in is provided for environments where systems furniture or cabling are subject to frequent change.
- Optimize base pathway accepts up to 77 voice/data cables (.25\"/>
- When electrical system shares base pathway, the cable capacity in Optimize is reduced to 25 cables (2.03 sq. in.).
- Cable capacity of the Optimize integrated power pole is 3.3 sq. in. for a total capacity of 34 cables of .25\"/>
- Cable capacity of the power pole/communication pole Model A870070 is 4.5 sq. in.
- Cables can enter/exit panel through underside of base pathway on frames.

Note: Cable quantities listed are at 60% fill ratio.

For specification information see pages 24-31.

GSA SIN 711-1



Description	Max. Recept. Cap. per Panel Side	Four-circuit 3 + 1 2 + 2	Three-circuit Separate Neutrals	List Price
Electrical Power Harnesses				
For 24" W Panels	1	A871224	A871224A [S]	\$ 238
For 30" W Panels	2	A871230	A871230A [S]	\$ 238
For 36" W Panels	2	A871236*	A871236A [S]	\$ 238
For 42" W Panels	2	A871242*	A871242A [S]	\$ 253
For 48" W Panels	2	A871248*	A871248A [S]	\$ 253
For 60" W Panels	2	A871260*	A871260A [S]	\$ 253
For 72" W Panels	2	A871272*	A871272A [S]	\$ 254

Electrical Pass-Thru Harnesses with Power Block


For 24" W Panels	1	A871124	A871124A [S]	\$ 147
For 30" W Panels	1	A871130	A871130A [S]	\$ 147
For 36" W Panels	1	A871136*	A871136A [S]	\$ 147
For 42" W Panels	1	A871142*	A871142A [S]	\$ 155
For 48" W Panels	1	A871148*	A871148A [S]	\$ 155
For 60" W Panels	1	A871160*	A871160A [S]	\$ 155
For 72" W Panel Runs	1	A871172	A871172A [S]	\$ 207
For 96" W Panel Runs	1	A871196	A871196A [S]	\$ 243
For 120" W Panel Runs	1	A8711120	A8711120A [S]	\$ 283
For 144" W Panel Runs	1	A8711144	A8711144A [S]	\$ 322

Electrical harnesses are intended for use with Allsteel systems furniture and are approved under GSA SIN 711-1. When purchased separately and used without Allsteel systems furniture, those electrical harnesses marked by () are considered Open Market.

Electrical Pass-Thru Cable without Power Block

For 24" W Panels	0	A871024	A871024A [S]	\$ 133
For 30" W Panels	0	A871030	A871030A [S]	\$ 133
For 36" W Panels	0	A871036	A871036A [S]	\$ 133
For 42" W Panels	0	A871042	A871042A [S]	\$ 140
For 48" W Panels	0	A871048	A871048A [S]	\$ 140
For 60" W Panels	0	A871060	A871060A [S]	\$ 140
For 72" W Panel Runs	0	A871072	A871072A [S]	\$ 194
For 96" W Panel Runs	0	A871096	A871096A [S]	\$ 233
For 120" W Panel Runs	0	A8710120	A8710120A [S]	\$ 270
For 144" W Panel Runs	0	A8710144	A8710144A [S]	\$ 304

Note: Four-circuit components and three-circuit components (with an "A" suffix) cannot be connected together.



Description	Max. Recept. Cap. per Panel Side	Eight-circuit 3 + 1 (each side) 2 + 2 (each side)	List Price
Dual Electrical Eight-circuit Power Harness Kit			
For 24" W Panels	1	A2-8CIR24 [S]	\$ 571
For 30" W Panels	2	A2-8CIR30 [S]	\$ 571
For 36" W Panels	2	A2-8CIR36 [S]	\$ 825
For 42" W Panels	2	A2-8CIR42 [S]	\$ 825
For 48" W Panels	2	A2-8CIR48 [S]	\$ 825
For 60" W Panels	2	A2-8CIR60 [S]	\$ 832
For 72" W Panels	2	A2-8CIR72 [S]	\$ 832

Note: Kit consists of two four-circuit harnesses placed "back-to-back" to provide 8 circuits.

E All Optimize models are available in the **Everyday Advantage®** program, see page 9 for details.

How to specify —
Select the
Model Number
from above.

1st Option:

Color:

P Black





P

Examples: A871224.P A871224A.P A2-8CIR36.P

[S] Shippable by small-package carrier.

For specification information see pages 24-31.

GSA SIN 711-1



Description	Four-circuit 3 + 1 2 + 2	Three-circuit Separate Neutrals	List Price
Duplex Receptacles for Optimize Base Pathway (specify color)			
Circuit 1	A871501	A871501A [S]	\$ 44
Circuit 2	A871502	A871502A [S]	\$ 44
Circuit 3 (3+1)	A871503	A871503A [S]	\$ 44
Circuit 3 (2+2)	A871506	N/A [S]	\$ 44
Circuit 4 — iso/dedicated	A871504	N/A [S]	\$ 44
Circuit 1, 20 AMP	A871601	A871601A [S]	\$ 44

Base Electrical In-Feed Cable

6' Sealtight Cable for Optimize Receptacle	A879072	A879072A [S]	\$ 267
6' Flex Cable	A871972	A871972A [S]	\$ 202

Ceiling Electrical In-Feed Cables

12' Flex Cable	A871912	A871912A [S]	\$ 273
18' Flex Cable	A871918	A871918A [S]	\$ 344
14' Sealtight Cable — 7/8" dia.	A879168	A879168A [S]	\$ 645

Hardwire Power In-Feed (New York Code)


For 30"-72" W panels	A871400	A871400A [S]	\$ 262
----------------------	---------	--------------	--------

Note: Customer to furnish all cabling and wiring from power entry to power source. (Approved for use by city of New York.)

Hardwire Junction Box (6-pack)	A871500	N/A [S]	\$ 565
--------------------------------	---------	---------	--------

Note: Junction box can be positioned at any duplex receptacle location for single-sided application. Customer must furnish conduit, wiring and designer-type receptacle. (Approved for use by city of Chicago.)**Receptacle Color Recommended to Coordinate with Paint Color**

Paint Color	Recommended Receptacle Color
Carob — P52.....	Black — E4
Champagne Metallic — PR5.....	Muslin — EU
Fossil — P28.....	Flint — E9
Gunmetal Metallic — PR3.....	Brownstone — EY
Parchment — P93.....	Muslin — EU
Platinum Metallic — PR2.....	Loft — EV

Note: Four-circuit components and three-circuit components (with an "A" suffix) cannot be connected together.

Description	Model	P1 List Price	P2 List Price
Integrated Power/Communication Pole for Optimize			
For 42½"H-65"H Panels — 78"H	P278PP [S]	\$ 610	\$ 624
For 42½"H-65"H Panels — 156"H	P2156PP [S]	\$ 810	\$ 827

Power/Communication Pole

10'5" long w/o Receptacles — 2¼" square	A870070	\$ 486	N/A
---	---------	--------	-----


E All Optimize models are available in the **Everyday Advantage®** program, see page 9 for details.

How to specify — Select the Model Number from above. _____ . E _____	1st Option: Electrical Receptacle Color (if applicable): See inside front cover for finishes. _____	1st Option: Color (if applicable): P Black _____	1st Option: Paint (if applicable): P1 P2 See inside front cover for finishes. _____
--	--	---	---

Example: A871501.E4 A879072.P A871912A.P P278PP.PR2


[S] Shippable by small-package carrier.

For specification information see pages 24-31.



Description	Model	List Price
Pull-up Receptacle — for HPL tops with grommets (Black only)		
Three 15 amp Simplex Receptacles	A870300 	\$ 233
Power/Data Dome — for HPL tops with grommets (Black only)		
2 simplex receptacles and 2 data positions	A870301 	\$ 226
Note: For additional corded with plug solutions see page 107.		

Note: For additional corded with plug solutions see page 107.



AMP Data Faceplates


Three-Port Flex-Mode Faceplate, Black (E4)	ATADF3 	\$ 24
Four-Port Flex-Mode Faceplate, Black (E4)	ATADF4 	\$ 24

Notes: ATADF3 can install up to 3 jacks (CAT 3, 5E or 6). ATADF4 can install 4 jacks (CAT 3, 5E or 6).
ATADF models are compatible with ports in Optimize base pathway.




Jacks

AMP RJ45 CAT 5E Jack — Black only (AMP model # 1116604-2) Toolless	ATADJ5	\$	45
AMP RJ45 CAT 6 Jack — Black only (AMP model # 1375055-2) Requires Tool	ATADJ6	\$	60




Cable Management Tray (Black only)

24" Tray	CMT24	<u>S</u>	\$ 78
36" Tray	CMT36	<u>S</u>	\$ 94



Wire Management Channel (Black only)

92" Long	AEV920	S	\$ 144
----------	--------	----------	--------



Cord Retainer Clip

Package of 50 (Black only)	AAPACM2	\$ 35
----------------------------	---------	-------




Wireway Grommet (Black only)


Pack of 6	TAWG	\$	\$ 114
-----------	------	----	--------

Replacement Receptacle Covers (specify cover color)

Pack of 25 PREPCVR \$ \$ 84



Description	Model	List Price		
		P1	P2	P3
Cord Organizer				
4"W x 7/8"D Metal with 4 cable cutouts	U9WTC 	\$ 120	\$ 126	\$ 132



Base Pathway Covers — with additional knockout

36" W	CBPLATE3-36	\$ 62	\$ 76	N/A
42" W	CBPLATE3-42	\$ 64	\$ 78	N/A
48" W	CBPLATE3-48	\$ 67	\$ 81	N/A
60" W	CBPLATE3-60	\$ 78	\$ 92	N/A

E All Optimize models are available in the **Everyday Advantage®** program, see page 9 for details.


How to specify — Select the Model Number from above.	<i>1st Option:</i> Paint Color (if applicable): P1 P2 P3 See inside front cover for finishes.	<i>1st Option:</i> Wireway Grommet, Receptacle Covers, and Data Faceplate Color:
---	---	---

Examples: A870300 AEV920 CMT24.P27 TAWG.E4
ATADF4.E4 PRECPCVR.EU U9WTC.PR2

S *Shippable by small-package carrier.*

Add Suffix "N" to model number for no grommets, no upcharge.

Laminate with Flat Edge

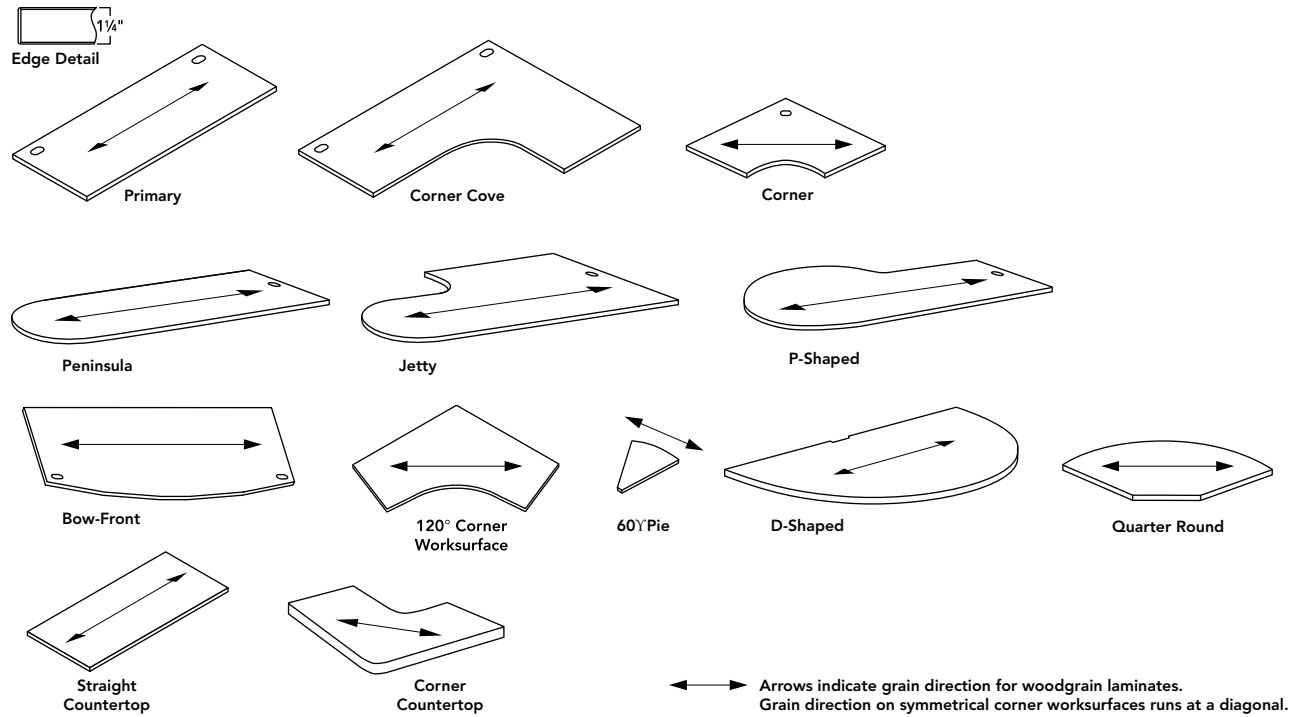


Laminate with T-Mold Edge — Discontinued 1/13/2018

Worksurfaces

Optimize™ — Working with Worksurfaces and Supports





GSA Reference Page

Worksurfaces are 1¼" thick with particleboard core and with top surfaces finished in laminate. Bottom surfaces are covered with a backer sheet. Worksurfaces can be panel hung or used in freestanding applications. Modesty panels and appropriate supports are required to configure freestanding Cadence® desks.

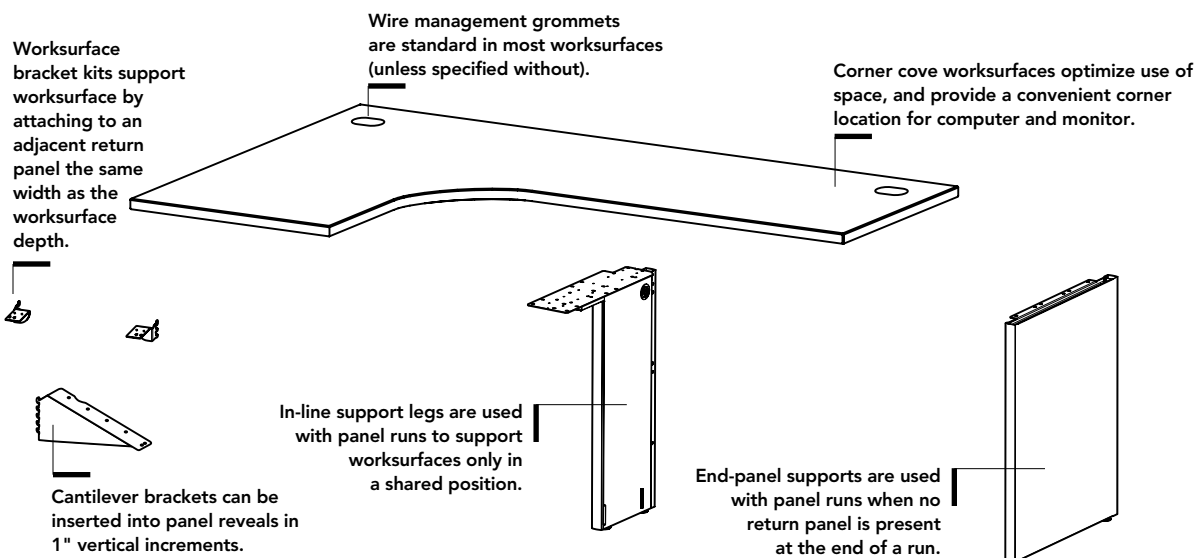

Worksurfaces

- **Laminate tops** offer flat edge trim in twenty standard colors (customer specified) to match solid or woodgrain laminates and to complement patterned laminates.
- **Optional wider width primary worksurfaces** are available for use with Optimize panel runs having a "T" or "S" connection — upcharge applies.

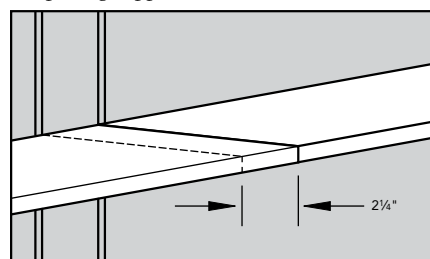

- **Wire management grommets** are standard in most worksurfaces (unless specified with no grommets) and specified in plastic or metal. Metal grommets are available in oval or square.
- Rectangular worksurfaces over 42"W have two grommets. Corner cove worksurfaces will have two grommets. Peninsula and corner worksurfaces have one. D-Shaped worksurfaces and countertops do not have grommets.
- Grommets on standard systems worksurfaces are located 2⅞" from side edges and 3⅞" from back edge.
- Add Suffix "N" to a model number for no grommets — no upcharge.

Supports

Worksurfaces can be configured at 29½"H with end-panel supports and in-line support panels, or at various heights on 1" increments using specific product configurations.

Worksurface support options include:

- | | |
|--------------------------------|-------------------------------------|
| • Support column* | • Support storage units* |
| • Flat brackets | • Pedestal-to-panel attachment kit* |
| • External support channel | • Desk-to-panel attachment kit* |
| • Worksurface bracket kits | • Corner desk leg |
| • Height adjustable mechanisms | • Bridge and return kits |
| • Cantilever brackets | • Modesty panels |
| • In-line support legs* | • Gussets |
| • End-panel supports* | |

*Units provide floor support.

Support Guidelines — See Drawings on page 39



- Panel mounted worksurface runs 96" and greater need floor support for improved stability when overheads are not used.
- When using overheads in panel mounted worksurface run applications 72" and greater, floor support* is required. (See list at left.)
- When using overheads at the end of a panel run, floor supports* are required.
- Worksurface bracket kit should be used to tie panels to worksurface for added stability.
- A return panel at the end of a panel run can be substituted with one of these floor supports: storage, open or closed end support panel, O-leg.

continued on next page





continued from previous page

- Cantilever brackets cannot be used at the end of a worksurface panel run in place of a return panel or floor support.
- Worksurface runs greater than 60"W require an external worksurface support channel when a center support cantilever cannot be used. It is recommended for spans greater than 48"W. See pages 45 and 57.


- Support channel may interfere with mounting of some CPU holders and keyboard supports.
- Cantilevers are recommended in place of an external worksurface support channel where feasible.
- Cadence Desking configurations utilize modesty panels and gussets in place of external support channels for worksurfaces up to 72"W. See pages 47-55.

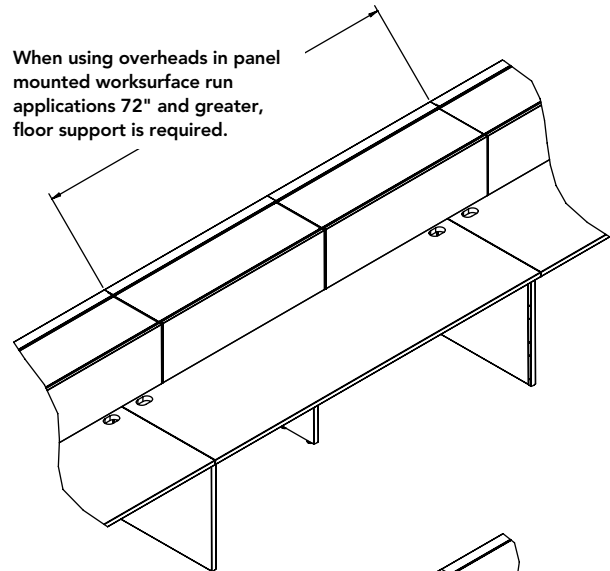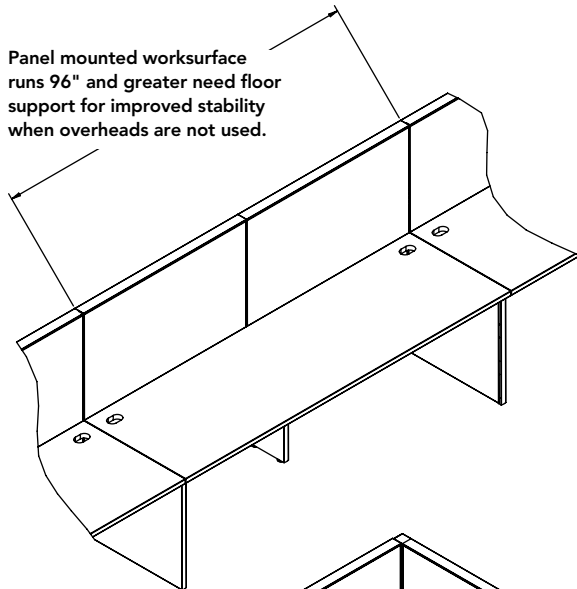

Worksurface bracket kit should be used to tie panels to worksurface for added stability

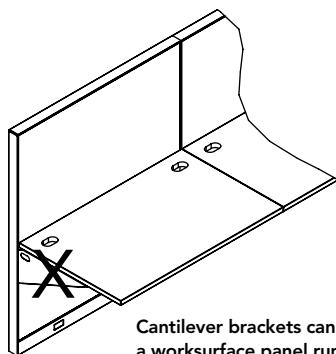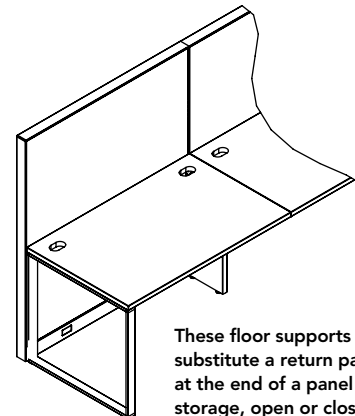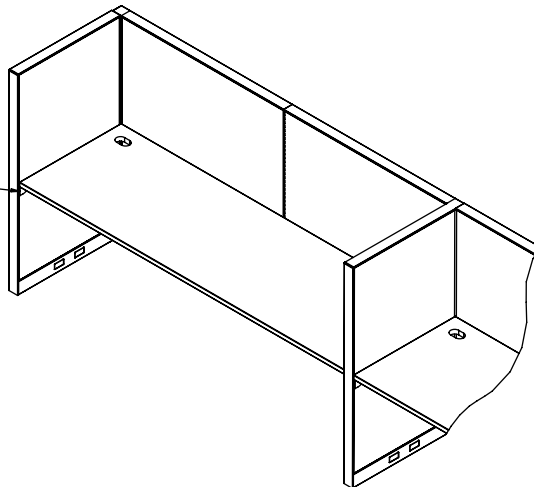


Cantilevers are recommended in place of an external worksurface support channel where feasible.

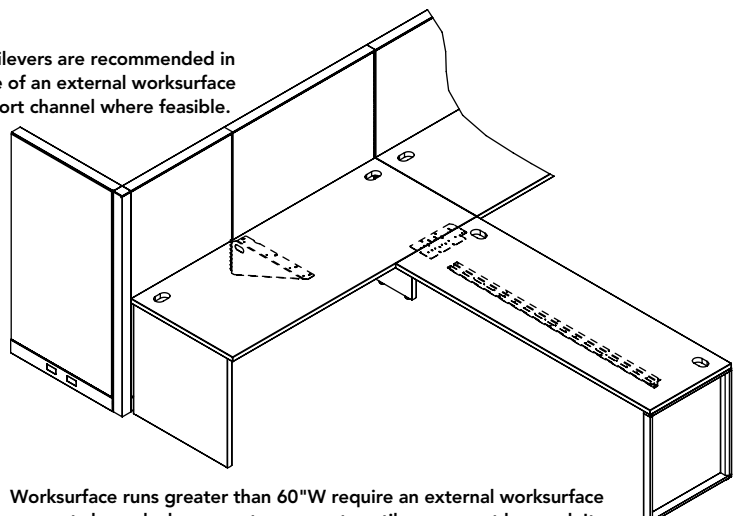

Cantilevers


Worksurface runs greater than 72" require floor support. Example: support pedestal or support leg. When the panel width matches the worksurface depth, worksurface brackets should be used at the end of runs. Cantilevers can and should still be used in the middle of a worksurface run 72" or less for proper support and to help prevent worksurface bowing. See examples below.

Example A: Cantilevers are allowed because worksurface is not greater than 72" W.

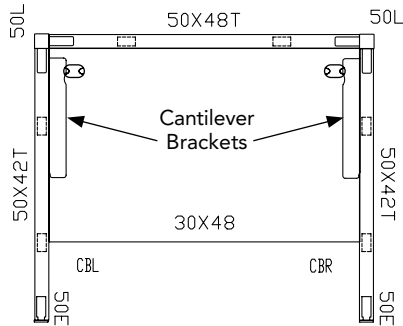


30"D x 48"W Worksurface and 42"W Return Panels

Example B: Cantilevers are allowed because worksurface run is not greater than 72" W.

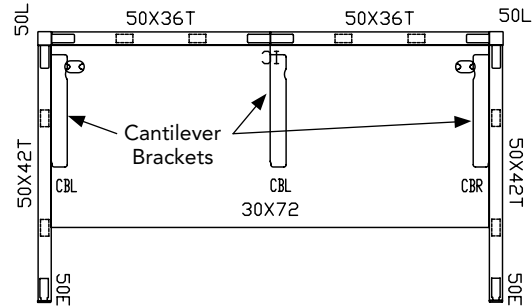


30"D x 72"W Worksurface and 42"W Return Panels

Example C: Cantilevers are used at both ends of 84" run. Support leg is used at center of run.

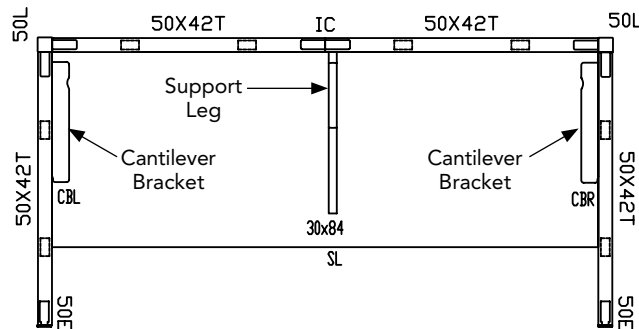


30"D Worksurface and 42"W Return Panels

Example D: Worksurface bracket kits are used at the end of runs where panel widths match worksurface depths. Cantilevers are used where worksurface depth does not match panel width and for center support on worksurface runs that are not greater than 72" W. For worksurface runs greater than 72" W floor support is required.

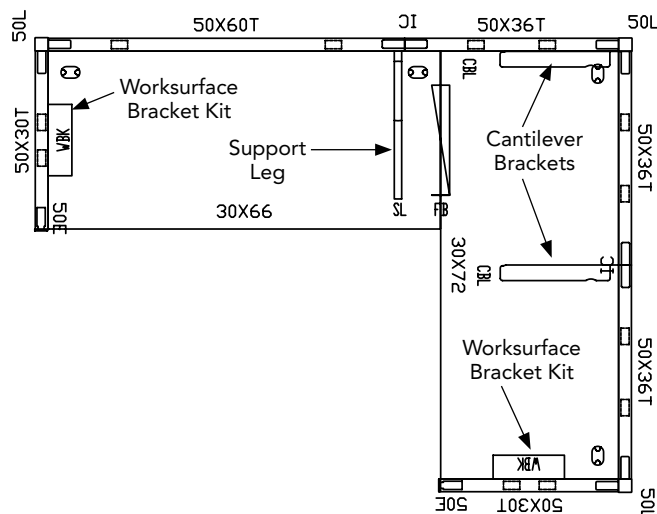

30"D Worksurfaces and 30"W Return Panels

Worksurfaces with Flat Edge

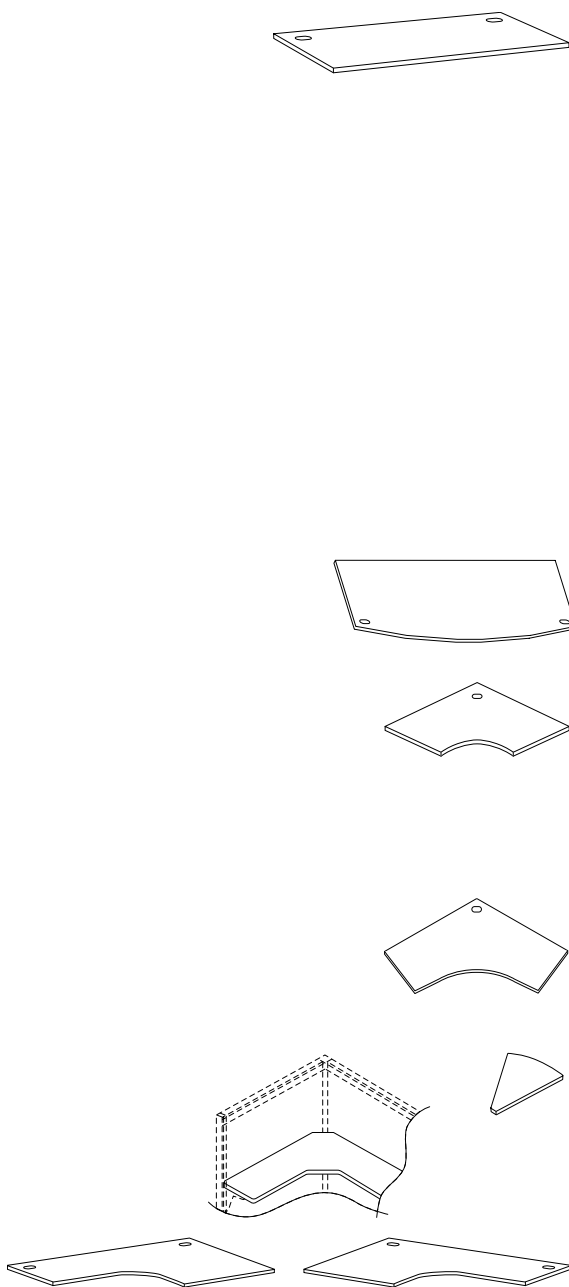

Primary Worksurfaces (page 56)

- Primary worksurfaces are available in 20", 24", and 30" depths up to 96"W. Worksurface spans greater than 72" require floor support.
- Nominal worksurface width is equal to nominal panel width.
- Wire management grommets standard, one for widths up to 42", two on widths 48"W and greater. Add "N" suffix for no grommets.
- Center support bracket included on 54"W-60"W. Other support hardware is ordered separately.
- Worksurfaces greater than 60"W require a cantilever bracket for center support in panel mounted applications. Specify 18" cantilever on 20"D, and 24" cantilever on 24"D and 30"D worksurfaces.
- Width must correspond with panel width(s). For worksurface to span a "T" or extended straight connection add upcharge and suffix "TM" to model number.
- Primary worksurfaces can be used with a modesty panel and appropriate supports to configure freestanding desk(s). Refer to Working With Cadence®, pages 47-55.
- The 9120 Program can be used to order HPL particle board rectangular worksurfaces in any non-standard width and depth in 1/8" increments up to a maximum of 120"W x 36"D. See pages 64-65.

Bow-Front Worksurfaces (page 57)

- Two wire management grommets standard.
- Can be used with a modesty panel and appropriate supports to configure freestanding desk. Refer to Cadence pages 47-55.

Corner Worksurfaces (page 58)

- One wire management grommet.
- Corner worksurfaces with woodgrain laminate have grain direction diagonal to adjacent worksurfaces.
- Rear corner left-handed support bracket included. Worksurface bracket kit (order separately) required at junction where a panel is wall-mounted to a permanent wall and wall track stanchion is not positioned in the right-hand corner.

120° Corner Worksurfaces (page 58)

- Standard with one wire management grommet in corner location.
- Rear support bracket included (left-handed). Worksurface bracket kit (order separately) required at junction where a panel is wall-mounted to a permanent wall and wall track stanchion is not positioned in the right hand corner.

60° Pie Worksurface (page 58)

- Order support column and two flat brackets separately.


Corner Shelf (page 58)

- Diagonal leading edge = 10½"; diagonal depth = 22½".
- Includes panel attachment brackets.

Corner Cove Worksurfaces (page 59)


- Two wire management grommets standard.
- Rear corner support bracket included with all surfaces. Worksurface bracket kit (order separately) required at junction where a panel is wall-mounted to a permanent wall and wall track stanchion is not positioned in the right-hand corner. All other support hardware is ordered separately.
- Can be used with a modesty panel and appropriate supports to configure freestanding desk(s). Refer to Cadence pages 47-55.
- Worksurfaces greater than 60"W require a cantilever bracket for center support in panel mounted applications. Specify 24" cantilever on 24"D and 30"D worksurfaces.

Worksurfaces with Flat Edge



Peninsula, P-Shaped, and Jetty Worksurfaces (page 60)

- Wire management grommets standard.
- Support column ordered separately, column includes panel support brackets T6BK.
- Can be used with a modesty panel and appropriate supports to configure freestanding desk(s). Refer to Cadence® pages 47-55.

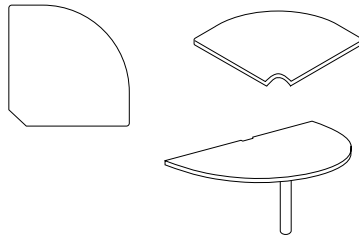


Quarter-Round Worksurfaces (page 61)

- Use to connect two 90° panel-attached worksurfaces.
- Order support column and two flat brackets separately.

D-Shaped Worksurfaces (page 61)

- Order support column and two 24" D in-line support legs separately.
- Not recommended for use with T6CB24L or T6CB24R for shared applications.
- Includes attachment bracket.




Countertops (page 62)

- Mounting brackets and attaching hardware ordered separately.
- Countertops are flush with panel top cap.

Countertop Brackets (page 62)

- Countertop brackets must be ordered separately. Models P51500 and P51500-42 each contain one right-hand and one left-hand bracket.
- Specify paint color.
- Model P51500 brackets are for 35"H or 50"H panels. Model P51500-42 brackets are for 42½"H panels.
- Order two model P51500 or P51500-42 for straight countertops. Order three model P51500 or P51500-42 for corner countertops.




Height-Adjustable Worksurfaces


- For freestanding applications, see height-adjustable tables in the Seating, Collaboration, and Tables Price List.

Non-Standard Worksurface Sizes (pages 64 and 65)


- The 9120 Program can be used to order particle board rectangular worksurfaces in any non-standard width and depth in ½" increments up to a maximum of 120"W x 36"D.
- Other modification requests should be made through Allsteel Tailored Products Group.




Worksurface Supports




End-Panel, Closed End,
and Open End Supports




Support Legs



Support
Columns



Handed
Cantilever Brackets



Non-Handed
Cantilever Brackets

End Supports and Bracket Kits (page 67)

- End-panels are 1½" thick. For use in place of panels at the end of worksurface runs.
- Levelers provide 1½" vertical adjustment.
- Must be connected into panel slots for panel hung applications.
- Straight worksurfaces adjacent to 120° connections must be supported by full end-panels.
- 11"D end-panel models for use with D-shaped worksurfaces or curvilinear shaped worksurfaces in freestanding applications.
- Panel mounted end-panel supports are ordered for right- or left-handed application.
- Open end panel supports are non-handed and are only for panel mounted applications.
- End-panel models can be converted to freestanding with removal of panel mount bracket. End-panel bracket kit converts freestanding end-panel support model to panel mounted.

Support Legs and Bracket Kit (page 67)

- Support legs are 1½" thick. Leg portion is 12¾"D. Supports the junction of two worksurfaces.
- Non-handed for use at either end of worksurface.
- Provided with flat bracket.
- Worksurface in-line support legs are used to support worksurfaces only in a shared position. Worksurfaces require to the floor support every 72".
- Levelers provide 1½" vertical adjustment.
- Must be connected into panel slots for panel hung applications.
- Panel mounted models can be converted to freestanding with removal of panel mount bracket.
- Support leg bracket kit (non-handed) converts freestanding model to panel mounted.

Support Columns (page 67)

- Used to support one end of curvilinear worksurfaces.
- D-shaped, P-shaped, peninsula, jetty, boomerang, and reef worksurfaces require support columns (ordered separately).
- Includes column, worksurface bracket kit T6BK, attaching hardware, and adjustable glides.


Cantilever Brackets — handed (page 67)

- Cantilever brackets are left or right handed. No assembly required.
- They can be inserted into panel reveals in 1" vertical increments.
- One size is used for both 24" and 30"D worksurfaces.
- 18"D cantilever are for use with 20"D worksurfaces and to support 24"D worksurfaces 66"-72"W that require a cantilever bracket for center support in panel mounted applications.
- 12"D cantilevers are only for use with 12"D secondary worksurfaces.
- Both left and right brackets are required in shared applications.
- Includes tie bracket and attachment hardware.
- Use with runs 72" or less — avoid installation on only one side of a straight connection except to support corner worksurfaces. Floor support is required for runs greater than 72". See page 40.
- Cantilevers can and should still be used in the middle of a worksurface run 72"W or less for proper support and to help prevent worksurface bowing. See page 40.
- DO NOT position at the end of a panel run.
- DO NOT use to support worksurfaces from which a hanging pedestal is suspended or peninsula worksurface is attached.
- DO NOT use cantilever brackets to support worksurfaces supported with permanent-wall hanger kit.

Cantilever Bracket — non-handed (page 67)

- Assembly required. Includes attachment hardware.
- Includes two angle brackets for shared applications. Use two cantilever brackets when adjacent worksurfaces are positioned at different heights.
- One size is used for both 24" and 30"D worksurfaces.

Worksurface Supports




Worksurface Brackets

Worksurface Bracket Kit — T6BK (page 67)

- Worksurface bracket kit allows one end of a worksurface to be supported by a return panel. Return panel width must be the same as the depth of the worksurface.
- Kit includes one pair of brackets and attachment hardware.
- Freestanding pedestals can also be used to support one end of a panel-attached worksurface in conjunction with worksurface bracket.

Worksurface Storage Bracket Kit — T6SB (page 67)

- Worksurface storage bracket kit (T6SB) is used for aesthetics where under-desk storage is immediately adjacent to the return panel. In all other applications use worksurface bracket kit (T6BK) to utilize worksurface threaded metal inserts.
- Black only.
- Kit includes one pair of brackets and attachment hardware.
- Brackets do not align with worksurface threaded metal inserts, and therefore require wood screws (included).



Flat Brackets




Pedestal-to-Panel Brackets

Flat Brackets (page 67)

- Includes bracket and attaching hardware.
- Can be used to connect one worksurface perpendicular to another worksurface.

Pedestal-to-Panel Attachment Bracket (page 67)

- Can be used in place of full end panel or return panel.
- Provides structural support to panel run by securing panel directly to pedestal.
- Works with Essentials™ and Involve® pedestals.



External Worksurface Support Channel

External Worksurface Support Channel (page 57)



- Is required on a systems worksurface for additional support for spans greater than 60". Width of worksurface span can be reduced by using support storage.
- Extends 1½" below the worksurface. Installs 7" from user's edge.
- When using 28"H mobile pedestals the length of support channel needs to be reduced to accommodate width of the pedestal.
- Support channel may interfere with mounting of some CPU holders and keyboard supports. May require spacer kit AKMH.

Freestanding Desks

- Freestanding desks can be created by combining primary and corner worksurfaces with modesty panels and appropriate desk supports. See Cadence® pages 47-55.

Cadence offers unlimited versatility. Its modular flexibility creates office solutions of all shapes, sizes, and styles.


Configurations

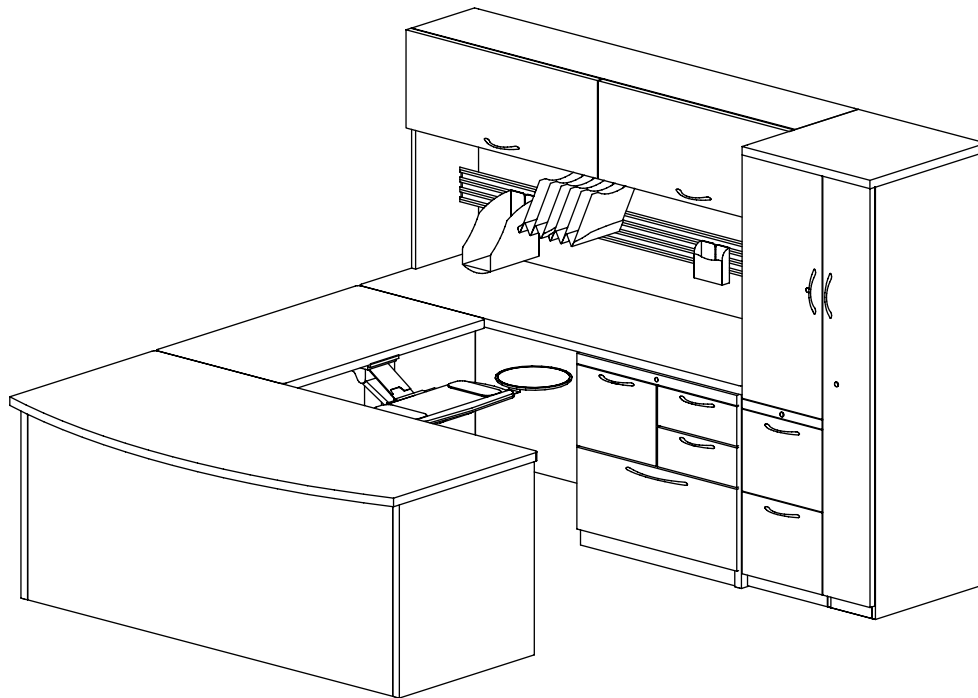

Full Modesty



Half Modesty



Gussets

All the right choices

Choose Cadence freestanding desking with confidence. It personalizes any work environment, accommodates a range of needs, and offers all the right features — curvilinear worksurface shapes, multiple worksurface edges, and a complete paint finish and laminate offering. Cadence is made to last with heavy-gauge steel construction. Metal-to-metal worksurface connection points make installation and reconfiguration reliable and easy. And Cadence is backed by a lifetime warranty.

Universally flexible

Cadence sets up easily and reconfigures time after time. It even shares components with Optimize, Terrace®, and Concensys®, which simplifies inventory management. Cadence is created with worksurfaces, supports, modesty panels, end panels, and brackets. Cadence is compatible with the entire line of Allsteel storage solutions and Extensions™ — work tools to provide personalized organization for every workstyle.

Systems integration — Cadence works in combination with Optimize, Terrace, or Concensys panels, extending the functionality of each product line.

Highly adaptable — Make the most of building architecture by using an existing wall to create a semi-private workspace.

Space utilization — Multiple worksurface shapes offer unlimited design potential for using space creatively and efficiently.

Team interaction — Cadence design flexibility allows you to create personal workspace and a team collaboration area in the same office.

The Cadence choice

It works in the open plan, the private office, or in combination with Optimize, Terrace, or Concensys panels, allowing complete office coordination. The flexible, universal design of Cadence supports virtually any workstyle and any interior aesthetic. Backed by Allsteel's Lifetime Warranty and manufactured to strict environmental standards, Cadence provides one high-value package.

Configurations

End Panels **E** and Support Legs **L**

Each are available in two options: freestanding or panel-mount. The only difference between the two options are the panel-mount models come with a left- or right-handed bracket to attach the support to a panel in a Cadence systems application. If the freestanding version is purchased and later needs to be converted to panel-mount, the proper handed panel-mount bracket may be purchased separately.


The 11"D end panel is used to freestand peninsulas, curvilinear shapes, and D-tops in panel applications.

Corner Desk Legs **C**

Corner desk legs have a 90-degree bend and welded construction. The strong construction allows gussets or half-height modesty panels to be used with corner legs.

Bridge Kits **B**

Bridge kits include: two flat brackets, two modesty panel-to-end panel attachment brackets, and two tie straps. This kit is used when attaching a bridge unit between two rectangular worksurfaces.

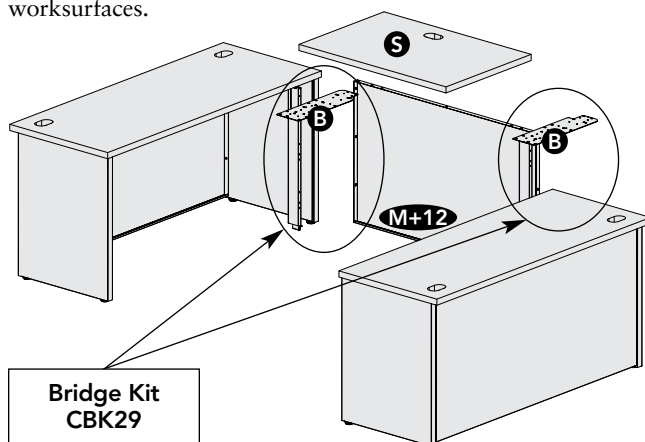

There are some bridge instances where only half of a bridge kit is needed (e.g. using a bridge between a rectangular worksurface and a corner or peninsula). A return kit may be ordered for these instances.


Surface **S**

Support Column **SC**

Support columns are used to support one end of curvilinear worksurfaces. Includes column, worksurface bracket kit T6BK, attaching hardware, and adjustable glides.

Return Kits **R**


Return kits include: one flat bracket, one modesty panel-to-end panel attachment bracket, and one tie strap. These are used when attaching a return to a primary desk. Return kits can also be used in some bridge applications — one example is shown below when using a peninsula.

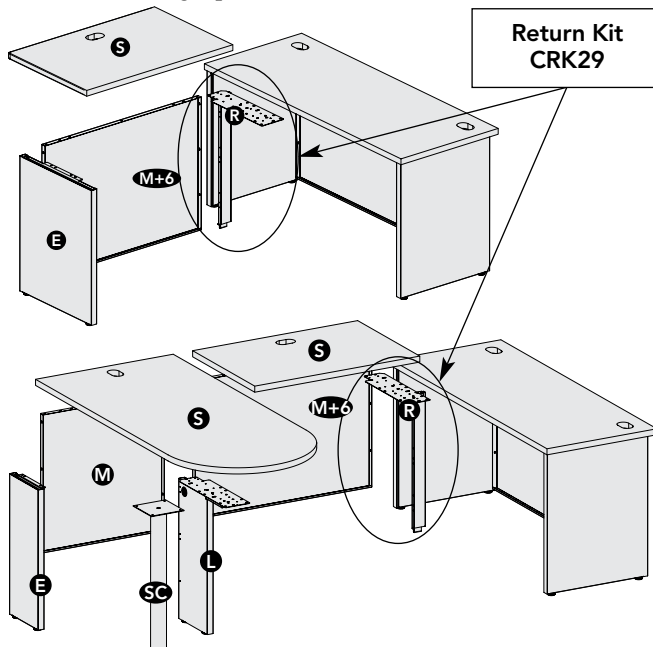

Desk-to-Panel Attachment Kits **D**


Desk-to-panel attachment kits are used to connect a worksurface and modesty panel perpendicular to a panel of corresponding width. Opposing end of worksurface must be attached with an end-panel, support leg, or corner leg mounted directly under this worksurface.

When using a corner or corner cove worksurface with the rear corner attached to a panel, and opposing end of worksurface is attached to a freestanding desk, use corner w/desk attachment kit. Hand of unit is determined from the user's side of the desk (right hand unit attaches to right side of modesty).

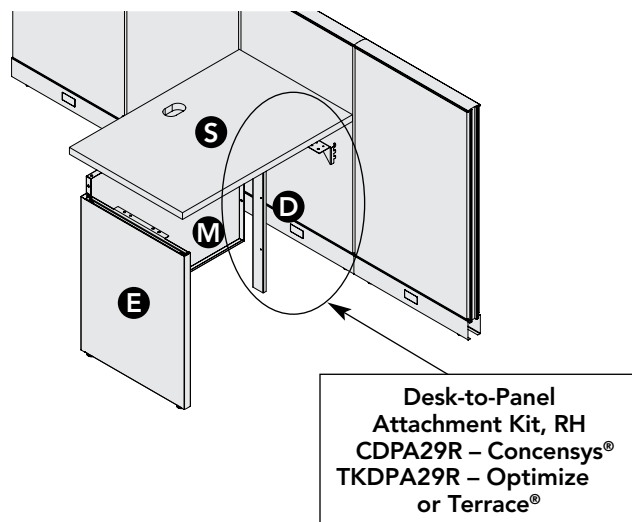

Corner w/Desk Panel Attachment Kit **CW**

Corner w/desk panel attachment kit connects the rear corner of a corner or corner cove worksurface and modesty panel to a panel when the opposing end of the worksurface shares a support leg with an adjacent freestanding desk and the support leg is mounted under the freestanding desk. Hand of unit is determined from the user's side of the desk (left hand unit attaches to left side of modesty).

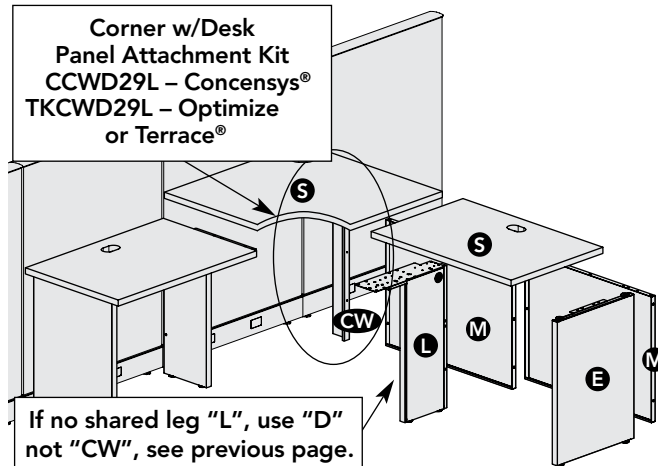


Corner Worksurfaces

Corner worksurfaces to accommodate 90-degree corner desk legs.

In-Line Connections of Desks

Freestanding full end panels must be used to support adjacent rectangular desks, corner desks, and corner desks with returns. Freestanding support legs should NOT be used at the in-line junction. 24"D full end panels may be used at the in-line junction on 30"D rectangular desks if two worksurface tie straps are used to secure the desks together. Contact Allsteel Customer Support for ordering information.

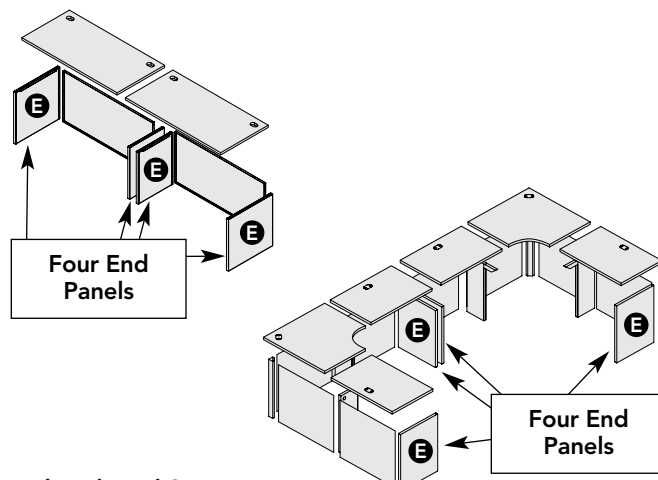

Pedestals and Storage

Pedestals must be ordered one size smaller than the depth of the worksurface. For example, 18"D or 20"D peds should be used with 24"D worksurfaces. 18", 20"D, or 23"D pedestals can be used with 30"D worksurfaces. Using 18"D laterals or personal files provide additional pull style and storage options under 24"D worksurfaces.


Modesty Panels **M**

The following are some general guidelines for Cadence modesty panels:

- **Desk:** Modesty panel width is the same width as the worksurface
- **Return:** Modesty panel width is 6" greater than the width of the worksurface
- **Bridge connecting two rectangular worksurfaces:** Modesty panel width is 12" greater than the width of the bridge worksurface
- **Bridge connecting a rectangular worksurface and corner or peninsula:** Modesty panel width is 6" greater than the width of the worksurface
- **Corner connecting to an adjacent worksurface:** Modesty panel width is the same width as the worksurface.


Stand-Alone Corner Modesty Panels **SM**

Stand-alone corner modesty panels are used only when one or both sides of a corner or corner cove worksurface are freestanding and NOT attached to another worksurface. Specify the width the same as the width of the worksurface.

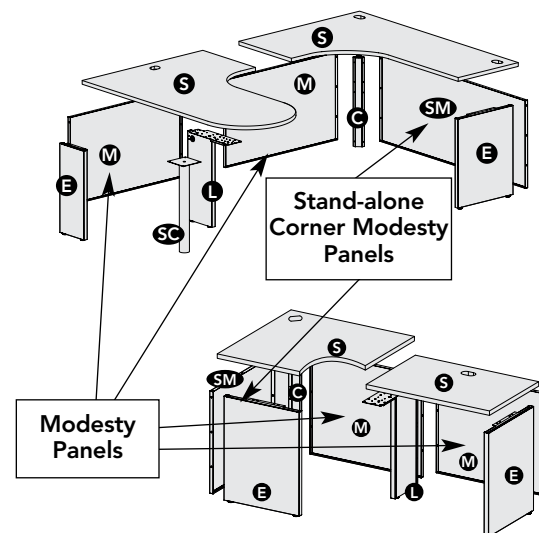

Gussets **G**


Gussets can be used in place of a modesty panel with desks 36"W to 60"W. Gussets can also be used with corner desk legs.

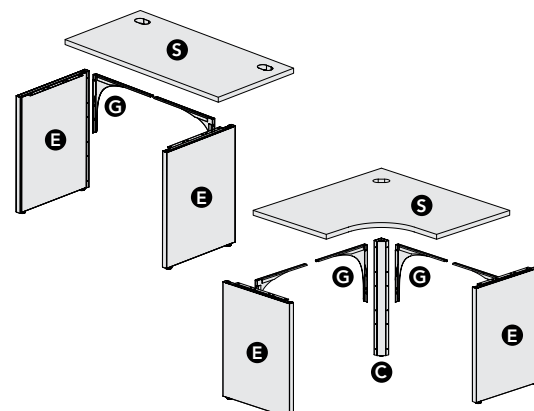

Configurations


Freestanding Desk

Example Shown Qty.	Model	Description
1	T52436S	Flat Edge Worksurface 24"D x 36"W
2	CEP2429F	End-Panel Support 24"D x 29½"H
1	CS369	Modesty Panel 36"W x 29½"H

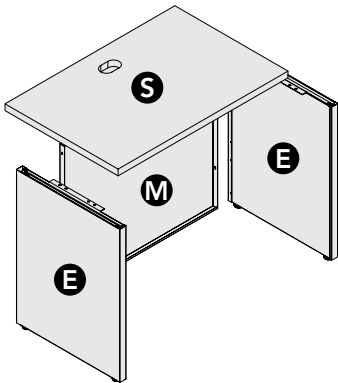


Panel-Attached Desk

Example Shown Qty.	Model	Description
1	T52436S	Flat Edge Worksurface 24"D x 36"W
1	CEP2429F	End-Panel Support 24"D x 29½"H
1	CS369	Modesty Panel 36"W x 29½"H
1	□DPA29R	Desk-to-Panel Attachment Kit 29½"H – RH C – Concensys® TK – Optimize or Terrace®

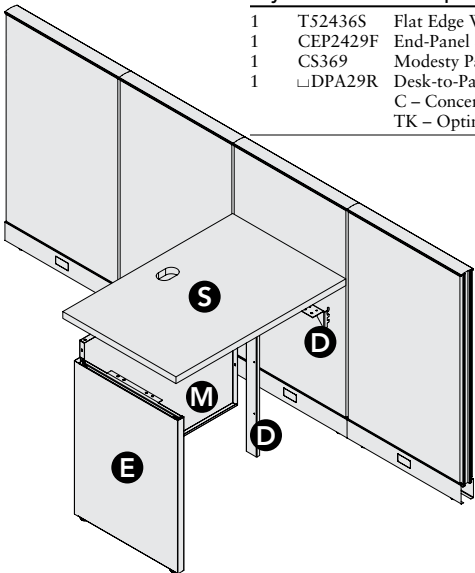

CONFIGURATION OPTIONS	Work-surface (S)	End-Panel Support (E)	Desk Support Leg (L)	Modesty Panel			Desk-to-Panel Attachment Kit (D)	Corner Desk Leg (C)
				Same width as Work-surface (M)	6" wider than Work-surface (M+6)	12" wider than Work-surface (M+12)		
Freestanding Desk	1	2		1				
Panel-Attached Desk	1	1		1			1 RH	

Return Desk (Attached to a primary or return desk.)

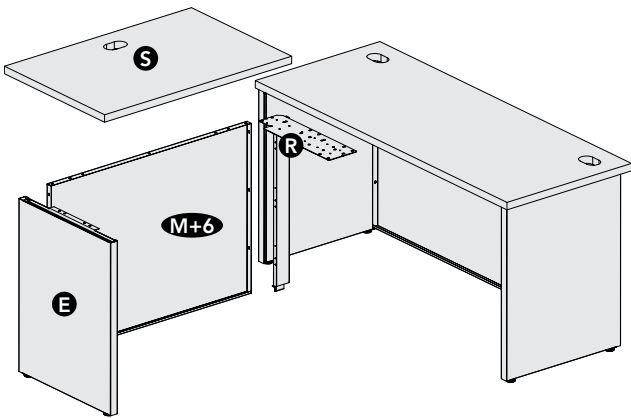


Example Shown Qty.	Model	Description
1	T52436S	Flat Edge Worksurface 24"D x 36"W
1	CS429	Modesty Panel 42"W x 29½"H
1	CEP2429F	End-Panel Support 24"D x 29½"H
1	CRK29	Return Kit

Note: The widest modesty panel is 72"W which limits return worksurfaces to a maximum of 66"W.

CONFIGURATION OPTIONS	Work-surface (S)	End-Panel Support (E)	Desk Support Leg (L)	Modesty Panel			Desk-to-Panel Attachment Kit (D)	Corner Desk Leg (C)	Return Kit (R)
				Same width as Work-surface (M)	6" wider than Work-surface (M+6)	12" wider than Work-surface (M+12)			
Return Desk	1	1			1				1

Return Desk (Attached to a panel-hung worksurface.)


Example Shown Qty.	Model	Description
1	T52448S	Flat Edge Worksurface 24"D x 48"W
1	CS549	Modesty Panel 54"W x 29½"H
1	CEP2429F	End-Panel Support 24"D x 29½"H
1	CRK29	Return Kit

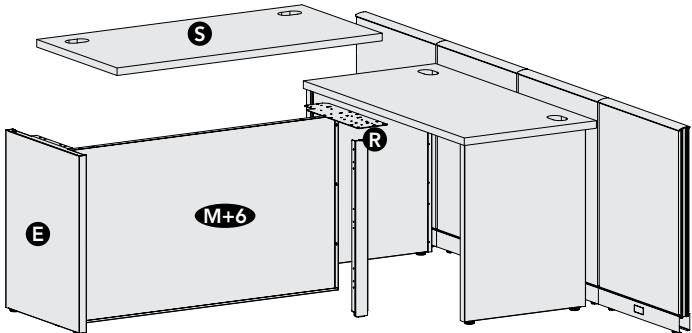

Configurations

GSA Reference Page

Bridge Desk (Attached between two primary desks.)

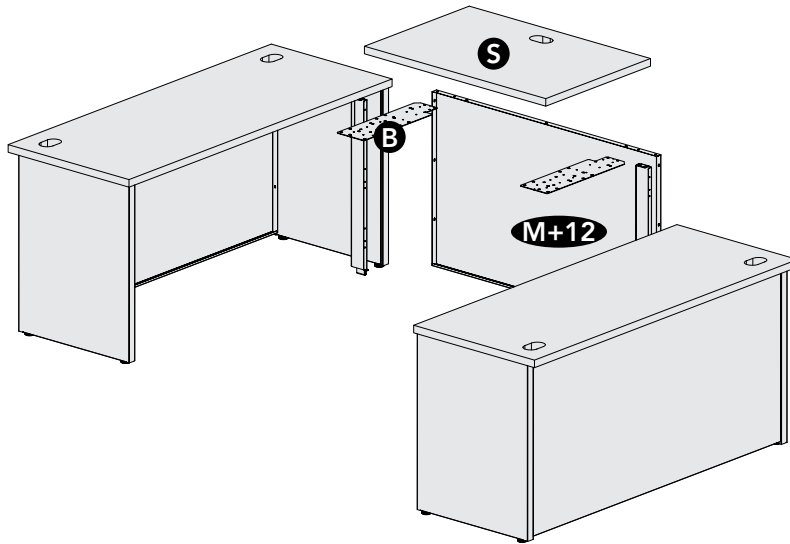


Example Shown

Qty.	Model	Description
1	T52442S	Flat Edge Worksurface 24"D x 42"W
1	CS549	Modesty Panel 54"W x 29½"H
1	CBK29	Bridge Kit

CONFIGURATION	Work-surface (S)	End-Panel Support (E)	Desk Support Leg (L)	Modesty Panel			Desk-to-Panel Attachment Kit (D)	Corner Desk Leg (C)	Bridge Kit (B)
				Same width as Work-surface (M)	6" wider than Work-surface (M+6)	12" wider than Work-surface (M+12)			
Bridge Desk	1					1			1

Bridge Desk and Peninsula (Attached to a primary desk).

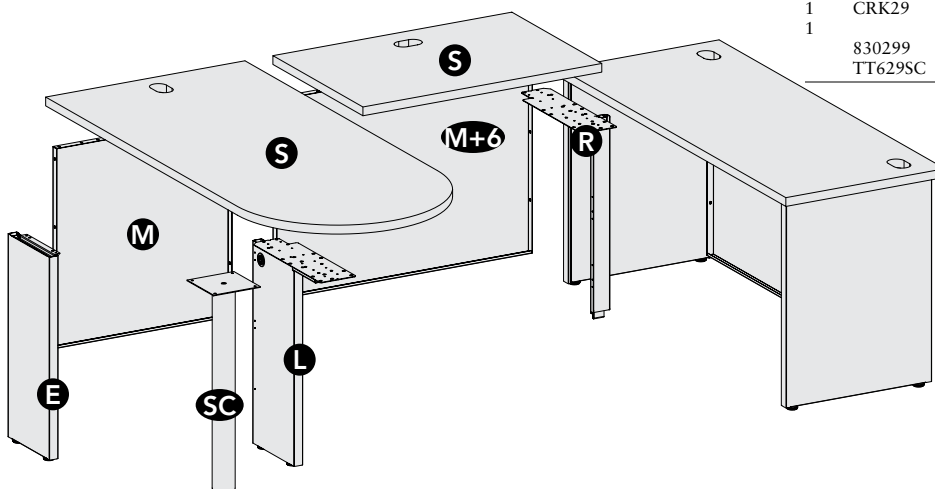

Example Shown


Qty.	Model	Description
1	T52442S	Flat Edge Worksurface 24"D x 42"W
1	T53060B	Flat Edge Peninsula Worksurface 30"W x 60"L
1	CS489	Modesty Panel 48"W x 29½"H
1	CS309	Modesty Panel 30"W x 29½"H
1	CEP1129F	End-Panel Support 11"D x 29½"H
1	CSL2429F	Support Leg 24"D x 29½"H
1	CRK29	Return Kit
1	830299	Support Column for Peninsula Worksurface 29½"H (Concensys®)
1	TT629SC	(Optimize or Terrace®)

CONFIGURATION OPTION	Work-surface (S)	End-Panel Support (E)	Desk Support Leg (L)	Modesty Panel			Desk-to-Panel Attachment Kit (D)	Support Column (SC)	Return Kit (R)
				Same width as Work-surface (M)	6" wider than Work-surface (M+6)	12" wider than Work-surface (M+12)			
Bridge Desk and Peninsula	2	1	1	1	1			1	1

Cadence® Freestanding


Configurations

Corner Desk (Stand-alone)

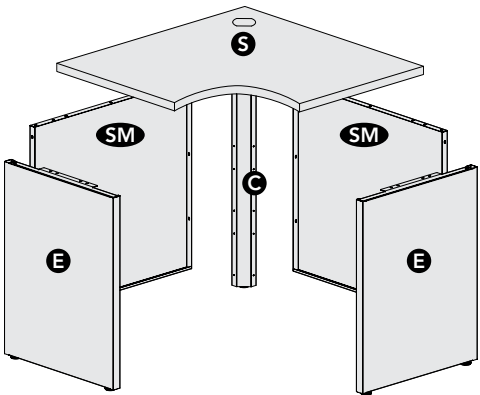

Qty.	Model	Description
1	T53624CR	Flat Edge Worksurface 24"D x 36"W
2	CSCMP3629	Stand-Alone Corner Modesty Panel 36"W x 29½"H
2	CEP2429F	End-Panel Support 24"D x 29½"H
1	CDL29	Corner Desk Leg 29½"H


Corner Desk (With an adjacent desk attached at one side.)

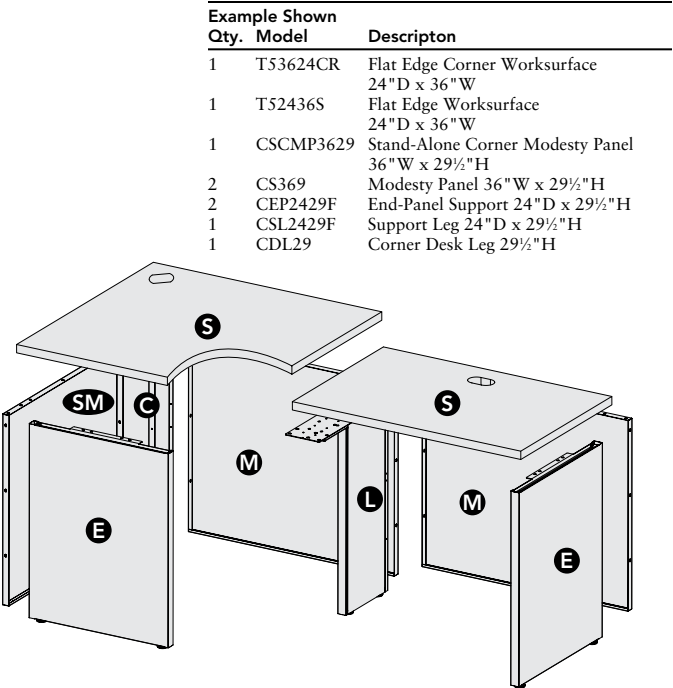

Qty.	Model	Description
1	T53624CR	Flat Edge Corner Worksurface 24"D x 36"W
1	T52436S	Flat Edge Worksurface 24"D x 36"W
1	CSCMP3629	Stand-Alone Corner Modesty Panel 36"W x 29½"H
2	CS369	Modesty Panel 36"W x 29½"H
2	CEP2429F	End-Panel Support 24"D x 29½"H
1	CSL2429F	Support Leg 24"D x 29½"H
1	CDL29	Corner Desk Leg 29½"H

CONFIGURATION OPTION	Work-surface (S)	End-Panel Support (E)	Desk Support Leg (L)	Modesty Panel		Stand-Alone Corner Modesty Panel	Desk-to-Panel Attachment Kit (D)	Corner Desk Leg (C)
				Same width as Work-surface (M)	6" wider than Work-surface (M+6)			
Corner Desk	1	2				2		1
Corner Desk (with adjacent desk)	2	2	1	2		1		1

Bridge Desk (Attached between corner and primary desk.)

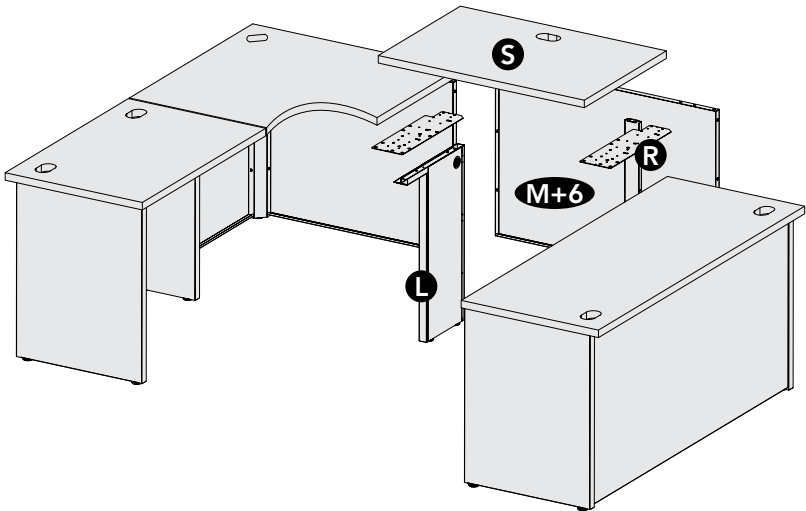


Qty.	Model	Description
1	T52436S	Flat Edge Worksurface 24"D x 36"W
1	CS429	Modesty Panel 42"W x 29½"H
1	CRK29	Return Kit
1	CSL2429F	Support Leg 24"D x 29½"H

CONFIGURATION	Work-surface (S)	End-Panel Support (E)	Desk Support Leg (L)	Modesty Panel			Desk-to-Panel Attachment Kit (D)	Corner Desk Leg (C)	Return Kit (R)
				Same width as Work-surface (M)	6" wider than Work-surface (M+6)	12" wider than Work-surface (M+12)			
Bridge Desk	1		1		1				1

Configurations


Corner Desk (Attached to a panel with an adjacent desk at one side.)

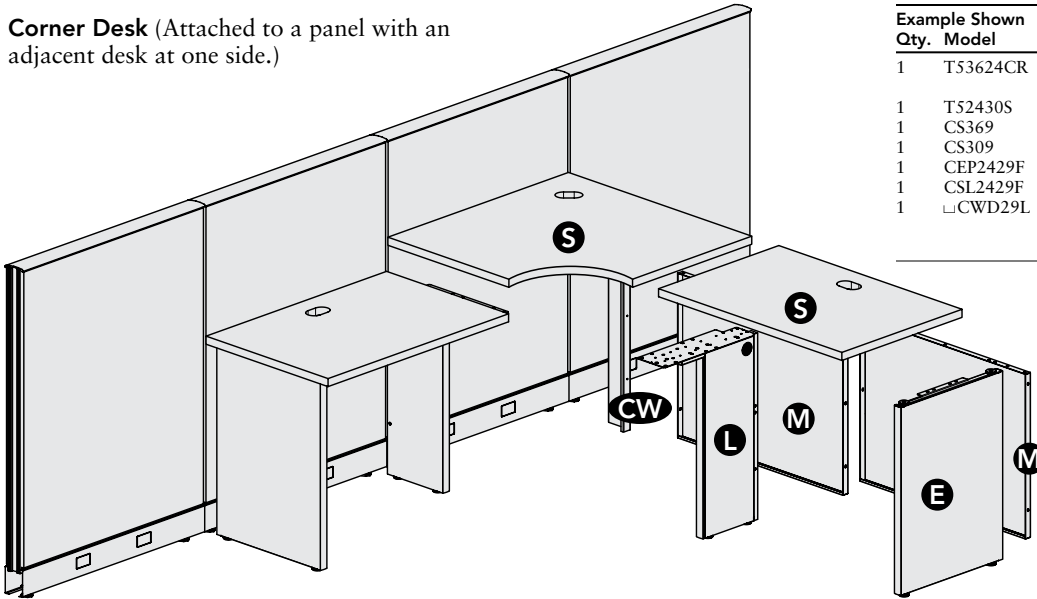

Example Shown		
Qty.	Model	Description
1	T53624CR	Flat Edge Corner Worksurface 36"W x 24"D
1	T52430S	Flat Edge Worksurface 24"D x 30"W
1	CS369	Modesty Panel 36"W x 29½"H
1	CS309	Modesty Panel 30"W x 29½"H
1	CEP2429F	End-Panel Support 24"D x 29½"H
1	CSL2429F	Support Leg 24"D x 29½"H
1	□CWD29L	Corner w/Desk Attachment Kit 29"H LH
C – Concensys®		
TK – Optimize or Terrace®		

CONFIGURATION	Work-surface (S)	End-Panel Support (E)	Desk Support Leg (L)	Modesty Panel			Desk-to-Panel Attachment Kit (D)	Corner Desk Leg (C)	Corner w/Desk Panel Attachment Kit (CW)
				Same width as Work-surface (M)	6" wider than Work-surface (M+6)	12" wider than Work-surface (M+12)			
Corner Desk	2	1	1	2					1 LH


"U" with Jetty and Corner Cove

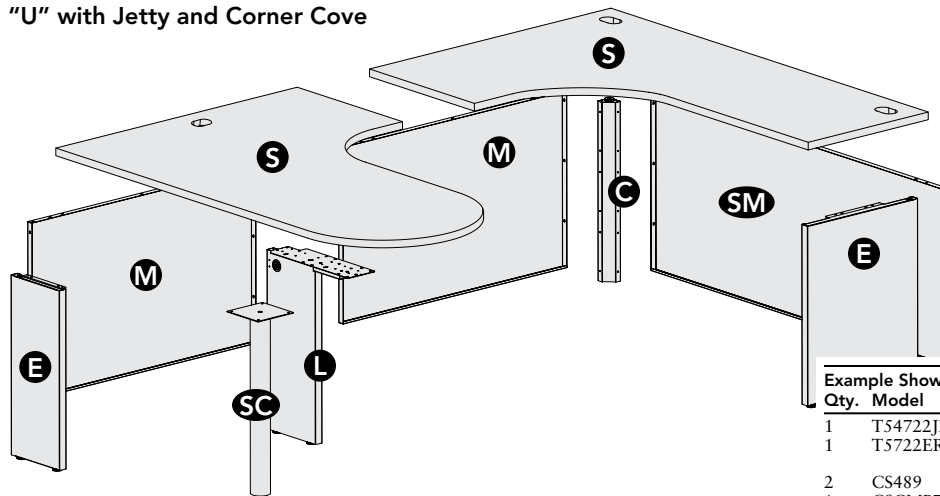

Example Shown		
Qty.	Model	Description
1	T54722JR	Flat Edge Jetty RH 48"D x 72"W x 24" x 30"
1	T5722ER	Flat Edge Corner Cove RH 48"D x 72"W x 24"
2	CS489	Modesty Panel 48"W x 29½"H
1	CSCMP7229	Stand-Alone Corner Modesty Panel 72"W x 29½"H
1	CEP1129F	End-Panel Support 11"D x 29½"H
1	CSL2429F	Support Leg 24"D x 29½"H
1	CEP2429F	Full End-Panel Support 24"D x 29½"H
1	CDL29	Corner Desk Leg 29½"H
1	830299	Support Column for Jetty 29½"H (Concensys)
1	TT629SC	(Optimize or Terrace)

CONFIGURATION OPTION	Work-surface (S)	End-Panel Support (E)	Desk Support Leg (L)	Modesty Panel		Stand-Alone Corner Modesty Panel	Support Column (SC)	Corner Desk Leg (C)
				Same width as Work-surface (M)	6" wider than Work-surface (M+6)	Same width as Work-surface (SM)		
Cove and Jetty	2	2	1	2		1	1	1


Cadence Supports



End-Panel Supports

End-Panel Supports (page 68)

- End panels are 1½" thick. For use at the end of worksurface runs.
- Levelers provide 1½" vertical adjustment.
- Freestanding models can be converted to Optimize panel-mount with end panel bracket kit.
- Must be connected into panel slots for panel hung applications.
- Straight worksurfaces adjacent to 120° connections must be supported by full end panels.
- 11"D models for use with D-shaped worksurfaces or curvilinear shaped worksurfaces in freestanding applications.



Support Leg

Support Legs (page 68)


- Support legs are non-handed. Supports the junction of two worksurfaces.
- Leg portion is 12¾"D and is 1½" thick.
- Flat bracket included.
- Levelers provide 2¾" vertical adjustment.
- Freestanding models can be converted to Optimize panel-mount with support leg bracket (non-handed).
- Must be connected into panel slots for panel hung applications.



Corner Desk Leg

Corner Desk Leg (page 68)

- Attaches two modesty panels at rear of corner desk.
- Leveler provides 2¾" vertical adjustment.
- See examples on pages 49 and 52.



Bridge Kit

Bridge Kit (page 68)


- Connects bridge worksurface and modesty panel to end panels and worksurfaces that are perpendicular to the bridge worksurface.
- Includes two flat brackets and two modesty panel-to-end-panel brackets.
- See examples on pages 49 and 52.



Return Kit

Return Kit (page 68)

- Connects return worksurface and modesty panel to end panel and perpendicular worksurface — non-handed.
- Includes one flat brackets and one modesty panel-to-end-panel bracket.
- See examples on pages 48 and 50.



Desk-to-Panel Attachment Kit

Desk-to-Panel Attachment Kits for Optimize (page 68)


- Used to connect a worksurface and modesty panel perpendicularly to a Optimize Panel of corresponding width. Opposing end of worksurface must be attached with an end-panel, support leg, or corner leg mounted directly under this worksurface.
- If using corner or corner cove with the rear corner attached to a panel, and opposing end of worksurface is attached to a freestanding desk — use corner w/desk panel attachment kit.
- “Hand” of unit is determined from the user’s side of the desk (left hand unit attaches to left side of modesty).



Corner w/Desk Attachment Kit

Corner w/Desk Panel Attachment Kit for Optimize (page 68)

- Used when the rear corner of a corner or corner cove worksurface and modesty panel is attached to a Optimize panel and opposing end of worksurface is attached to a freestanding desk. Opposing end of worksurface shares the support leg that is mounted under the adjacent freestanding desk.
- “Hand” of unit is determined from the user’s side of the desk.




Flat Bracket

Flat Brackets (page 68)

- Bracket and attaching hardware.
- Can be used to connect one worksurface perpendicular to another worksurface.

Cadence Supports

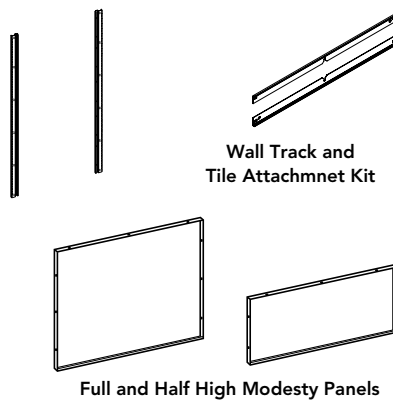

Freestanding Pedestals

- Can also be used to support one end of a panel-attached worksurface in conjunction with worksurface bracket.

Freestanding Desks


- Freestanding desks can be created by combining primary and corner worksurfaces with modesty panels and appropriate desk supports. See pages 47-53.

Pedestal Compatibility with Cadence and Panel-hung Worksurfaces

Cadence Desking	24" Deep	30" Deep
18"D Ped	Yes	Yes
19½"D Ped	Yes*	Yes
23¾"D Ped		Yes
29½"D Ped		
Systems Panel-hung	24" Deep	30" Deep
18"D Ped	Yes	Yes
19½"D Ped	Yes*	Yes
23¾"D Ped	Yes*	Yes
29½"D Ped		Yes*

*Wire management grommet is blocked in these applications.

Note: Pedestal placement may affect access to receptacles in base pathway.

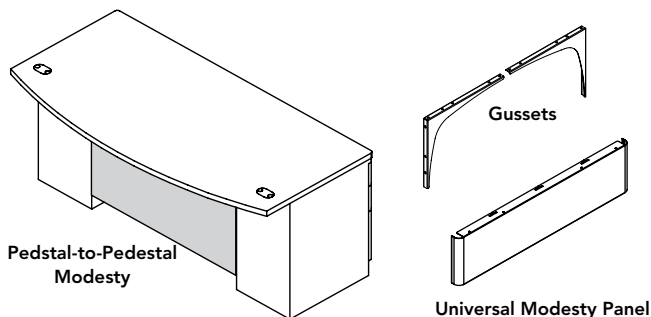

Universal Modesty Panels

	Peninsula			P-Shape	Jetty		Boomerang
Model	60"L	66"L	72"L	72"L	66"L	72"L	72"L
PMP41	•						
PMP47		•		•	•		
PMP53			•			•	•

Optimize Wall Track/Tile Attachment Kits (page 68)

- Allows for mounting of system panel components on permanent wall structures.
- Begin with one pair of ends; for multiple kits in line, add middle unit(s) between ends.
- Height of wall track coordinates with panel height. Field cut for lower heights.
- Wall track will add 1" to depth of attached components.
- Use Terrace® wall track tile attachment kit to install tiles onto Optimize wall track. Kit includes two tile bars. Top bar may only be used in the top uppermost position on wall track. Bottom bar can be used in the bottom position at any location on wall track.
- When segmenting tiles on wall track, segment bars must be ordered for placement between all vertically adjacent tiles or at the top position of a single tile that is not in the uppermost position.
- When using Optimize wall track and using Terrace tiles to create a tackboard situation under overheads hung at 65"H, make sure to use a 30"H tile or 2-15"H tiles to cover the entire area between the overheads and the worksurface.

Modesty Panel (page 69)

- Mounts to end-panel supports, desk support legs, bridge kit, return kit, desk-to-panel, and corner w/desk panel attachment kits.
- 29½"H units provide ¾" of space between bottom of modesty panel and floor.
- Actual width of 29½"H modesty panel is ¾" less than the nominal dimension listed in the Systems Price List.
- 14"H units provide 1¼" of space between bottom of modesty panel and floor.
- Refer to pages 47-53 to select proper width.
- Use 14"H modesty panels for desks positioned against a wall to provide access to electrical receptacles.
- 14"H modesty panels, stand-alone corner modesty panels or gussets can be used with corner or corner cove worksurfaces.

Stand-alone Corner Modesty Panel (page 69)

- 29½"H units provide ¾" of spacing between bottom of panel and floor.
- 14"H units provide 1¼" of space between bottom of modesty panel and floor.
- Actual width of modesty panel is 6⅙" less than the nominal dimension listed in the Systems Price List.
- Modesty panels are inset 2⅞"; when adding pedestals, consult chart below.

Pedestal-to-Pedestal Modesty Panels (page 69)

- Widths available to work with 60"W, 66"W, and 72"W worksurfaces to create freestanding double pedestal desk using two medal support pedestals.


Gussets (page 69)

- Provides easy access to wall outlets.
- Cannot be used with suspended pedestals.
- Gussets can be used on corner and corner cove worksurfaces.


Universal Modesty Panel (page 69)

- Mounts under peninsula, P-shape, jetty, and boomerang worksurfaces. Refer to chart below to select proper width.
- Can be used with panel-mounted and freestanding worksurfaces.
- Provides 8½" of privacy and is non-handed.
- Constructed of steel. No upcharge for Select paint.
- Only requires attachment to the worksurface.
- Does not provide electrical, data or structural support.
- Panel is 1½" thick and can be mounted at various distances from edge of worksurface based on user's preference for clearance and conferencing requirements.

For specification information see pages 37-55.
For non-standard worksurface sizes see pages 64-65.



Description	Laminate w/Flat Edge Model	Laminate w/Flat Edge		
		L1 List Price	L2 List Price	L3 List Price
Primary Worksurfaces				
24"W x 20"D	T52024S	\$ 254	\$ 268	\$ 282
30"W x 20"D	T52030S	\$ 269	\$ 284	\$ 298
36"W x 20"D	T52036S	\$ 300	\$ 316	\$ 332
42"W x 20"D	T52042S	\$ 337	\$ 355	\$ 372
48"W x 20"D	T52048S	\$ 364	\$ 383	\$ 401
54"W x 20"D	T52054S	\$ 394	\$ 415	\$ 433
60"W x 20"D	T52060S	\$ 448	\$ 473	\$ 492
66"W x 20"D	T52066S	\$ 486	\$ 513	\$ 534
72"W x 20"D	T52072S	\$ 506	\$ 534	\$ 555
78"W x 20"D	T52078S	\$ 658	\$ 692	\$ 722
84"W x 20"D	T52084S	\$ 688	\$ 723	\$ 754
90"W x 20"D	T52090S	\$ 813	\$ 853	\$ 892
96"W x 20"D	T52096S	\$ 853	\$ 895	\$ 936
24"W x 24"D	T52424S	\$ 267	\$ 282	\$ 296
30"W x 24"D	T52430S	\$ 281	\$ 297	\$ 311
36"W x 24"D	T52436S	\$ 317	\$ 334	\$ 350
42"W x 24"D	T52442S	\$ 355	\$ 373	\$ 391
48"W x 24"D	T52448S	\$ 385	\$ 406	\$ 423
54"W x 24"D	T52454S	\$ 415	\$ 439	\$ 456
60"W x 24"D	T52460S	\$ 471	\$ 497	\$ 516
66"W x 24"D	T52466S	\$ 511	\$ 539	\$ 561
72"W x 24"D	T52472S	\$ 534	\$ 563	\$ 585
78"W x 24"D	T52478S	\$ 692	\$ 727	\$ 758
84"W x 24"D	T52484S	\$ 724	\$ 761	\$ 794
90"W x 24"D	T52490S	\$ 856	\$ 898	\$ 939
96"W x 24"D	T52496S	\$ 899	\$ 943	\$ 987
24"W x 30"D	T53024S	\$ 281	\$ 297	\$ 311
30"W x 30"D	T53030S	\$ 338	\$ 356	\$ 373
36"W x 30"D	T53036S	\$ 364	\$ 383	\$ 401
42"W x 30"D	T53042S	\$ 393	\$ 414	\$ 432
48"W x 30"D	T53048S	\$ 415	\$ 439	\$ 456
54"W x 30"D	T53054S	\$ 463	\$ 489	\$ 508
60"W x 30"D	T53060S	\$ 516	\$ 544	\$ 566
66"W x 30"D	T53066S	\$ 556	\$ 586	\$ 610
72"W x 30"D	T53072S	\$ 603	\$ 635	\$ 661
78"W x 30"D	T53078S	\$ 782	\$ 821	\$ 859
84"W x 30"D	T53084S	\$ 817	\$ 857	\$ 897
90"W x 30"D	T53090S	\$ 975	\$ 1023	\$ 1070
96"W x 30"D	T53096S	\$ 1006	\$ 1055	\$ 1104



Notes:

- 1) Add suffix and upcharge for 24"D and 30"D primary worksurfaces to span a "T" or extended straight connection. Suffix = "TM" for flat edge worksurfaces (Optimize — adds 2¼" to width) \$32 upcharge. Examples: **T53030STM**, **T53060STM**
- 2) Add Suffix "N" to model number for no grommet, no upcharge. Example: **T53078SN**

E All Optimize models are available in the **Everyday Advantage®** program, see page 9 for details.




How to specify — Select the Model Number from above. <u>Prefix</u> T Lamineate w/Flat	<i>1st Option:</i> Laminate: See inside front cover for finishes.	<i>2nd Option:</i> Edge Trim Color: See inside front cover for finishes.	<i>3rd Option:</i> Grommet Type (if applicable): P Oval Plastic (will match edge trim) M Oval Metal (Add \$11 per grommet) S Square Metal (Add \$11 per grommet)	<i>4th Option:</i> Grommet Color (Metal only): EL Matte Silver Note: Plastic grommet color matches trim selection.
---	---	--	---	---

Examples: T52424S.LM14.EW.P T53048STMN.LM14.E4

For specification information see pages 37-55.

Laminate

GSA SIN 711-1




Description	Laminate w/Flat Edge Model	Laminate w/Flat Edge		
		L1	L2	L3
		List Price	List Price	List Price
Bow-Front Worksurfaces				
60"W x 30"D¹ x 36"D²	TT53660BT	\$ 774	\$ 813	\$ 850
66"W x 30"D¹ x 36"D²	TT53666BT	\$ 839	\$ 880	\$ 920
72"W x 30"D¹ x 36"D²	TT53672BT	\$ 902	\$ 946	\$ 990

Note: Add Suffix "N" to model number for no grommet, no upcharge.

Sample Worksurface

12"W x 12"D	831212M	\$ 225	\$ 238	\$ 250
-------------	---------	--------	--------	--------



Description	Model	List Price
External Worksurface Support Channel (no color option) — 1½"H		
30"W External Support Channel for use on 42"W Worksurface	Z5SC42 	\$ 53
36"W External Support Channel for use on 48"W Worksurface	Z5SC48 	\$ 55
42"W External Support Channel for use on 54"W Worksurface	Z5SC54 	\$ 62
48"W External Support Channel for use on 60"W Worksurface	Z5SC60	\$ 67
54"W External Support Channel for use on 66"W Worksurface	Z5SC66	\$ 78
60"W External Support Channel for use on 72"W Worksurface	Z5SC72	\$ 84
66"W External Support Channel for use on 78"W Worksurface	Z5SC78	\$ 91
72"W External Support Channel for use on 84"W Worksurface	Z5SC84	\$ 101

E All Optimize models are available in the **Everyday Advantage**® program, see page 9 for details.

How to specify — Select the Model Number from above.	1st Option: Laminate (if applicable): See inside front cover for finishes.	2nd Option: Edge Trim Color (if applicable): See inside front cover for finishes.	3rd Option: Grommet Type (if applicable): P Oval Plastic (will match edge trim) M Oval Metal (Add \$11 per grommet) S Square Metal (Add \$11 per grommet)	4th Option: Grommet Color (Metal only) (if applicable): EL Matte Silver Note: Plastic grommet color matches trim selection.
--	---	--	---	---


Examples: TT53660BT.LT3B.EV.P 831212M.LT3B.EX.P
Z5SC42

S *Shippable by small-package carrier.*

For specification information see pages 37-55.

Laminate


GSA SIN 711-1

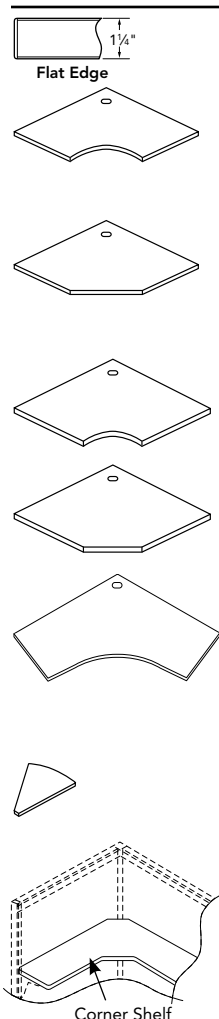


Description	Laminate w/Flat Edge Model	Laminate w/Flat Edge		
		L1 List Price	L2 List Price	L3 List Price
24"D Corner Worksurfaces w/Radial Leading Edge				
36"W x 24"D	T53624CR	\$ 536	\$ 565	\$ 588
42"W x 24"D	T54224CR	\$ 570	\$ 600	\$ 626
48"W x 24"D	T54824CR	\$ 649	\$ 683	\$ 712
24"D Corner Worksurfaces w/Straight Leading Edge				
36"W	T53624SC	\$ 518	\$ 544	\$ 570
42"W	T54224SC	\$ 543	\$ 570	\$ 597
48"W	T54824SC	\$ 609	\$ 639	\$ 670
30"D Corner Worksurfaces w/Radial Leading Edge				
42"W x 30"D	T54230CR	\$ 689	\$ 724	\$ 755
48"W x 30"D	T54830CR	\$ 743	\$ 780	\$ 816
30"D Corner Worksurfaces w/Straight Leading Edge				
42"W	T54230SC	\$ 659	\$ 692	\$ 725
48"W	T54830SC	\$ 681	\$ 715	\$ 749
120° Corner Worksurface				
30"W x 24"D	TT53024CB	\$ 699	\$ 734	\$ 766
36"W x 24"D	TT53624CB	\$ 774	\$ 813	\$ 850
42"W x 24"D	TT54224CB	\$ 829	\$ 870	\$ 910
48"W x 24"D	TT54824CB	\$ 912	\$ 956	\$ 1001
60° Pie Worksurface				
24"D	TN52424SD	\$ 436	\$ 461	\$ 479
Corner Shelves with Flat Edge				
36" x 36" x 11"D	860536M	\$ 444	\$ 469	\$ 487
42" x 42" x 11"D	860542M	\$ 469	\$ 495	\$ 514
48" x 48" x 11"D	860548M	\$ 500	\$ 527	\$ 544

Note: Add Suffix “N” to model number for no grommet, no upcharge.

Corner Worksurfaces with Radial Leading Edge

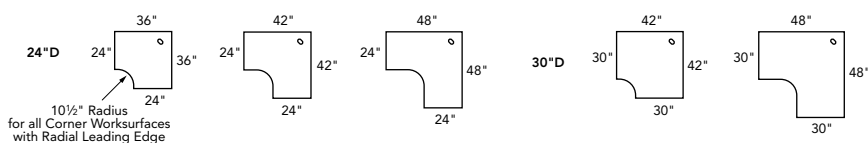

Corner Worksurfaces
with Straight Leading Edge

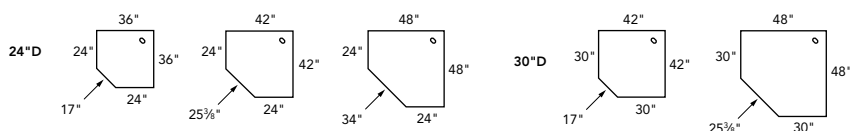

E All Optimize models are available in the **Everyday Advantage®** program, see page 9 for details.


How to specify — Select the Model Number from above.	1st Option: Laminate: See inside front cover for finishes.	2nd Option: Paint (Corner Shelves only): P1 P2 See inside front cover for finishes.	2nd Option: Edge Trim Color: See inside front cover for finishes.	3rd Option: Grommet Type (if applicable): P Oval Plastic (will match edge trim) M Oval Metal (Add \$11 per grommet) S Square Metal (Add \$11 per grommet)	4th Option: Grommet Color (Metal only): EL Matte Silver Note: Plastic grommet color matches trim selection.
.	.	P	.		E L

Examples: T53624C.LT3B.EV.MEL 860536M.LT3B.P27.E4


For specification information see pages 37-55.

Laminate

GSA SIN 711-1




Description	Laminate w/Flat Edge Model	Laminate w/Flat Edge		
		L1	L2	L3
		List Price	List Price	List Price
Corner Cove Worksurfaces — Extended Left				
60" x 36" — 24"L / 24"R	T5822EL	\$ 612	\$ 644	\$ 672
60" x 36" — 24"L / 30"R	T5832EL	\$ 636	\$ 669	\$ 698
60" x 48" — 24"L / 24"R	T5622EL	\$ 677	\$ 712	\$ 742
60" x 48" — 30"L / 24"R	T5623EL	\$ 706	\$ 742	\$ 775
60" x 48" — 24"L / 30"R	T5632EL	\$ 706	\$ 742	\$ 775
60" x 48" — 30"L / 30"R	T5633EL	\$ 732	\$ 769	\$ 804
72" x 36" — 24"L / 24"R	T5922EL	\$ 677	\$ 712	\$ 742
72" x 36" — 24"L / 30"R	T5932EL	\$ 706	\$ 742	\$ 775
72" x 48" — 24"L / 24"R	T5722EL	\$ 864	\$ 906	\$ 947
72" x 48" — 30"L / 24"R	T5723EL	\$ 893	\$ 936	\$ 981
72" x 48" — 24"L / 30"R	T5732EL	\$ 893	\$ 936	\$ 981
72" x 48" — 30"L / 30"R	T5733EL	\$ 919	\$ 964	\$ 1009



Corner Cove Worksurfaces — Extended Right				
36" x 60" — 24"L / 24"R	T5822ER	\$ 612	\$ 644	\$ 672
36" x 60" — 30"L / 24"R	T5832ER	\$ 636	\$ 669	\$ 698
48" x 60" — 24"L / 24"R	T5622ER	\$ 677	\$ 712	\$ 742
48" x 60" — 24"L / 30"R	T5623ER	\$ 706	\$ 742	\$ 775
48" x 60" — 30"L / 24"R	T5632ER	\$ 706	\$ 742	\$ 775
48" x 60" — 30"L / 30"R	T5633ER	\$ 732	\$ 769	\$ 804
36" x 72" — 24"L / 24"R	T5922ER	\$ 677	\$ 712	\$ 742
36" x 72" — 30"L / 24"R	T5932ER	\$ 706	\$ 742	\$ 775
48" x 72" — 24"L / 24"R	T5722ER	\$ 864	\$ 906	\$ 947
48" x 72" — 24"L / 30"R	T5723ER	\$ 893	\$ 936	\$ 981
48" x 72" — 30"L / 24"R	T5732ER	\$ 893	\$ 936	\$ 981
48" x 72" — 30"L / 30"R	T5733ER	\$ 919	\$ 964	\$ 1009

Note: Add Suffix “N” to model number for no grommet, no upcharge.

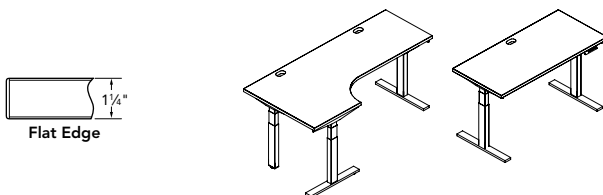

Note: Freestanding Altitude electric height-adjustable tables are available to order in Seating, Collaboration, and Tables price list.

E All Optimize models are available in the **Everyday Advantage®** program, see page 9 for details.

How to specify — Select the Model Number from above.	1st Option: Laminate: See inside front cover for finishes.	2nd Option: Edge Trim Color: See inside front cover for finishes.	3rd Option: Grommet Type: P Oval Plastic (will match edge trim) M Oval Metal (Add \$11 per grommet) S Square Metal (Add \$11 per grommet)	4th Option: Grommet Color (Metal only): EL Matte Silver Note: Plastic grommet color matches trim selection.
.	.	.		E L

Examples: T5822EL.LT3B.EY.MEL T5822EL.LT3B.EV.P

Worksurfaces

Optimize™ — Peninsula / P-Shaped / Jetty



For specification information see pages 37-55.

Laminate

GSA SIN 711-1

Support column ordered separately.

Description	Laminate w/Flat Edge Model	Laminate w/Flat Edge		
		L1 List Price	L2 List Price	L3 List Price
Peninsula Worksurfaces				
60"L x 30"W	T53060B	\$ 707	\$ 743	\$ 776
66"L x 30"W	T53066B	\$ 781	\$ 820	\$ 858
72"L x 30"W	T53072B	\$ 853	\$ 895	\$ 936
60"L x 36"W	T53660B	\$ 853	\$ 895	\$ 936
66"L x 36"W	T53666B	\$ 946	\$ 992	\$ 1038
72"L x 36"W	T53672B	\$ 1042	\$ 1092	\$ 1145
P-Shaped Worksurfaces w/42" Diameter End				
72"L x 30"W (Left hand)	T53072PR	\$ 977	\$ 1025	\$ 1073
72"L x 30"W (Right hand)	T53072PL	\$ 977	\$ 1025	\$ 1073
Jetty Worksurfaces — Left Hand				
48"A x 66"B x 24"C x 30"D	T54662JL	\$ 919	\$ 964	\$ 1009
48"A x 72"B x 24"C x 30"D	T54722JL	\$ 938	\$ 983	\$ 1029
48"A x 66"B x 30"C x 30"D	T54663JL	\$ 959	\$ 1005	\$ 1052
48"A x 72"B x 30"C x 30"D	T54723JL	\$ 976	\$ 1024	\$ 1072
Jetty Worksurfaces — Right Hand				
48"A x 66"B x 24"C x 30"D	T54662JR	\$ 919	\$ 964	\$ 1009
48"A x 72"B x 24"C x 30"D	T54722JR	\$ 938	\$ 983	\$ 1029
48"A x 66"B x 30"C x 30"D	T54663JR	\$ 959	\$ 1005	\$ 1052
48"A x 72"B x 30"C x 30"D	T54723JR	\$ 976	\$ 1024	\$ 1072
Note: Add Suffix "N" to model number for no grommet, no upcharge.				



E All Optimize models are available in the **Everyday Advantage®** program, see page 9 for details.

How to specify — Select the Model Number from above.	1st Option: Laminate: See inside front cover for finishes.	2nd Option: Edge Trim Color: See inside front cover for finishes.	3rd Option: Grommet Type: P Oval Plastic (will match edge trim) M Oval Metal (Add \$11 per grommet) S Square Metal (Add \$11 per grommet)	4th Option: Grommet Color (Metal only): EL Matte Silver Note: Plastic grommet color matches trim selection.
				EL

Examples: T53060B.LT3B.EV.P T54662JL.LT3B.EV.MEL

Worksurfaces

Optimize™ — Quarter-Round / D-Shaped

For specification information see pages 37-55.


Laminate

GSA SIN 711-1

Support column
ordered separately.




Support column
and flat brackets
ordered separately.



Support column
and 11" end panels
ordered separately.


Note: Cantilever brackets should not be used in place of end panels in this application.

Description	Laminate w/Flat Edge Model	Laminate w/Flat Edge		
		L1	L2	L3
		List Price	List Price	List Price
Quarter-Round Worksurfaces (outside corner connecting two 90° panel-attached worksurfaces)				
24"D x 24"D	802424M	\$ 364	\$ 383	\$ 401
30"D x 30"D	803030M	\$ 459	\$ 485	\$ 503




D-Shaped Worksurfaces

Connects to two 24"D Worksurfaces	832407M	\$ 699	\$ 734	\$ 766
Connects to two 30"D Worksurfaces	833007M	\$ 814	\$ 854	\$ 893

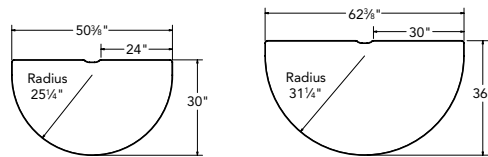

832407M

833007M



E All Optimize models are available in the **Everyday Advantage**® program, see page 9 for details.

How to specify — Select the Model Number from above.	<i>1st Option:</i> Laminate: See inside front cover for finishes.	<i>2nd Option:</i> Edge Trim Color: See inside front cover for finishes.
--	---	--

Examples: 802424M.LT3B.EV 832407M.LT3B.EV


For specification information see pages 37-55.

Laminate

GSA SIN 711-1



Description	Model	P1 Paint List Price	P2 Paint List Price
Countertop Brackets — Straight countertops require 2 sets; corner countertops 3 sets			
For 35"H and 50"H Panels — 1 each right-hand and left-hand	P51500	\$ 37	\$ 46
For 42½"H Panels — 1 each right-hand and left-hand	P51500-42	\$ 37	\$ 46



GSA SIN 711-1



GSA SIN 711-1

Description	Laminate w/Flat Edge Model	Laminate w/Flat Edge		
		L1 List Price	L2 List Price	L3 List Price
Straight Countertops — must order 2 sets of brackets per surface				
24"W x 15"D	851524M	\$ 234	\$ 248	\$ 260
30"W x 15"D	851530M	\$ 260	\$ 275	\$ 288
36"W x 15"D	851536M	\$ 291	\$ 307	\$ 322
42"W x 15"D	851542M	\$ 301	\$ 317	\$ 333
48"W x 15"D	851548M	\$ 318	\$ 335	\$ 351
54"W x 15"D	851554M	\$ 360	\$ 379	\$ 396
60"W x 15"D	851560M	\$ 402	\$ 418	\$ 433
66"W x 15"D	851566M	\$ 417	\$ 441	\$ 458
72"W x 15"D	851572M	\$ 433	\$ 458	\$ 475

Corner Countertops 15"D at ends — must order 3 sets of brackets per surface

24"W x 24"W	852424M	\$ 455	\$ 481	\$ 499
30"W x 30"W	853030M	\$ 529	\$ 558	\$ 580
36"W x 36"W	853636M	\$ 587	\$ 618	\$ 644
42"W x 42"W	854242M	\$ 636	\$ 669	\$ 698



Flat Edge

E All Optimize models are available in the **Everyday Advantage®** program, see page 9 for details.

How to specify — Select the Model Number from above.	1st Option: Laminate (Countertops only): See inside front cover for finishes.	1st Option: Paint (for Brackets only): P1 P2 See inside front cover for finishes.	2nd Option: Edge Trim Color (Countertops only): See inside front cover for finishes.
---	--	--	---

Examples: 851524M.LT3B.EX P51500.P02

Worksurfaces

9120 Program

Laminate Worksurfaces / Non-Standard Sizes

ORDERING


The 9120 Program can be used to order particle board rectangular worksurfaces in any non-standard width and depth in 1/8" increments up to a maximum of 120" W x 36" D.

Specify:

- Model Number**
Specify closest nominal width/depth model (round up).
- Grommet Option** (if desired)
See grommet specification instructions on this page.
- Grommet Type:**
P Plastic
M Metal (add \$11 per grommet for laminate)
- Grommet Color:**
(Metal only)
EL Matte Silver
NOTE: Plastic grommet will match flat edge.
- Laminate Choices**
See inside front cover.
- Flat Edge Color Choices**
See EDGE COLORS inside front cover for laminates.
- Exact Size**
Specify the **EXACT Width** and **EXACT Depth** you require.
Width and depth is specified in 1/8" increments which is denoted as a single digit following the whole number dimension at the end of the model number string.

1/8" = 1	5/8" = 5
2/8" = 2	6/8" = 6
3/8" = 3	7/8" = 7
4/8" = 4	no extra increment = 0

For example, when ordering a worksurface that is 34 3/8" W x 20 1/2" D, specification should be 345Wx204D.
Example: 9120R3624.G0.TM33.EU.345Wx204D.



PRODUCT SPECIFICATIONS

- Flat Edge on all sides
- 45 lb. particle board
- 1 1/4" top thickness
- .020 resin impregnated paper backer sheet
- Grommets available
- Maximum width 120" (maximum recommended unsupported span is 42")
- Maximum depth 36"
- Standard Allsteel laminates
- Quantities of 10 or greater are palletized; less than 10 are individually cartoned.

Note: 9120 worksurface maximum unsupported span is 42". 9120 worksurfaces do not have pre-drilled pilot holes or threaded metal inserts.


When spanning multiple freestanding storage units with one worksurface, add 1/8" for each additional storage unit. For example, when ordering a worksurface for three 30"W lateral files. 3 units x 30" = 90" + 1/8" + 1/8" = 90 1/4" worksurface. Do NOT follow this rule if panel wrapping storage units.

CHANGES / CANCELLATIONS

No changes/cancellations for 9120 Program Worksurfaces.

GROMMET SPECIFICATIONS

Plastic grommets are made of durable ABS plastic and grommets match edge color on laminate worksurfaces. Metal grommets are only available Matte Silver oval for laminate.



PRICING

One Grommet – GC, GL, or GR Position \$17.00
Two Grommets – G3 or G4 Position..... \$34.00
NOTE: Add \$11 per grommet for Metal grommets with laminate.


ORDERING

Specify grommet location and color.
Example: 9120R10836.GCP.TM33.EU.1022Wx326D

Code Grommet Position

- GC Centered side-to-side – 3 1/8" from rear to grommet edge; 4 1/2" from rear to grommet center
- GL 3" from left side – 3 1/8" from rear to grommet edge; 4 1/2" from rear to grommet center
- GR 3" from right side – 3 1/8" from rear to grommet edge; 4 1/2" from rear to grommet center
- G3 Pair of grommets each 18" from side edge – 3 1/8" from rear to grommet edge; 4 1/2" from rear to grommet center (Position G3 not available on tops 60"W or less.)
- G4 Pair of grommets each 3 1/8" from side edge – 3 1/8" from rear to grommet edge; 4 1/2" from rear to grommet center
- G0 No grommets

Dimensions are from grommet center line to top edge.

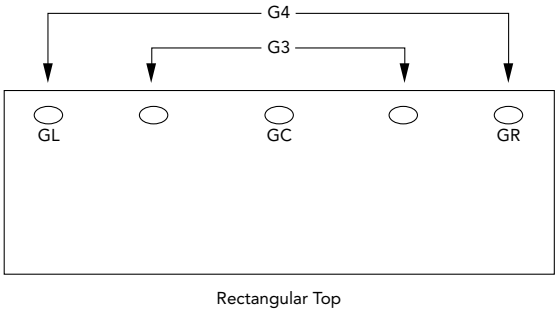

Grommet positions other than those shown above are considered non-standard.

Worksurfaces

9120 Program

For specification information see page 64.

Laminate Worksurfaces / Non-Standard Sizes

GSA SIN 711-1


Maximum	Model Number*	Width		Depth		Laminate List Price		
		MIN	MAX	MIN	MAX	L1	L2	L3
18"D								
18"W	9120R1818	180W	180W	121D	180D	\$ 309	\$ 326	\$ 341
24"W	9120R2418	181W	240W	121D	180D	\$ 322	\$ 339	\$ 355
30"W	9120R3018	241W	300W	121D	180D	\$ 335	\$ 353	\$ 369
36"W	9120R3618	301W	360W	121D	180D	\$ 366	\$ 385	\$ 403
42"W	9120R4218	361W	420W	121D	180D	\$ 403	\$ 424	\$ 443
48"W	9120R4818	421W	480W	121D	180D	\$ 466	\$ 492	\$ 511
60"W	9120R6018	481W	600W	121D	180D	\$ 579	\$ 610	\$ 635
72"W	9120R7218	601W	720W	121D	180D	\$ 699	\$ 734	\$ 766
84"W	9120R8418	721W	840W	121D	180D	\$ 915	\$ 959	\$ 1005
96"W	9120R9618	841W	960W	121D	180D	\$ 946	\$ 992	\$ 1038
108"W	9120R10818	961W	1080W	121D	180D	\$ 1082	\$ 1134	\$ 1188
120"W	9120R12018	1081W	1200W	121D	180D	\$ 1232	\$ 1292	\$ 1352
24"D								
24"W	9120R2424	181W	240W	181D	240D	\$ 350	\$ 368	\$ 386
30"W	9120R3024	241W	300W	181D	240D	\$ 364	\$ 383	\$ 401
36"W	9120R3624	301W	360W	181D	240D	\$ 398	\$ 419	\$ 437
42"W	9120R4224	361W	420W	181D	240D	\$ 434	\$ 459	\$ 476
48"W	9120R4824	421W	480W	181D	240D	\$ 494	\$ 521	\$ 542
60"W	9120R6024	481W	600W	181D	240D	\$ 608	\$ 640	\$ 668
72"W	9120R7224	601W	720W	181D	240D	\$ 727	\$ 764	\$ 797
84"W	9120R8424	721W	840W	181D	240D	\$ 946	\$ 992	\$ 1038
96"W	9120R9624	841W	960W	181D	240D	\$ 977	\$ 1025	\$ 1073
108"W	9120R10824	961W	1080W	181D	240D	\$ 1113	\$ 1167	\$ 1222
120"W	9120R12024	1081W	1200W	181D	240D	\$ 1261	\$ 1322	\$ 1385
30"D								
30"W	9120R3030	241W	300W	241D	300D	\$ 420	\$ 444	\$ 461
36"W	9120R3630	301W	360W	241D	300D	\$ 442	\$ 467	\$ 485
42"W	9120R4230	361W	420W	241D	300D	\$ 470	\$ 496	\$ 515
48"W	9120R4830	421W	480W	241D	300D	\$ 509	\$ 537	\$ 559
60"W	9120R6030	481W	600W	241D	300D	\$ 668	\$ 701	\$ 730
72"W	9120R7230	601W	720W	241D	300D	\$ 763	\$ 801	\$ 837
84"W	9120R8430	721W	840W	241D	300D	\$ 1158	\$ 1214	\$ 1271
96"W	9120R9630	841W	960W	241D	300D	\$ 1186	\$ 1243	\$ 1302
108"W	9120R10830	961W	1080W	241D	300D	\$ 1335	\$ 1399	\$ 1466
120"W	9120R12030	1081W	1200W	241D	300D	\$ 1487	\$ 1560	\$ 1633
36"D								
36"W	9120R3636	301W	360W	301D	360D	\$ 598	\$ 629	\$ 656
42"W	9120R4236	361W	420W	301D	360D	\$ 680	\$ 715	\$ 745
48"W	9120R4836	421W	480W	301D	360D	\$ 764	\$ 802	\$ 838
60"W	9120R6036	481W	600W	301D	360D	\$ 936	\$ 981	\$ 1027
72"W	9120R7236	601W	720W	301D	360D	\$ 1103	\$ 1157	\$ 1211
84"W	9120R8436	721W	840W	301D	360D	\$ 1335	\$ 1399	\$ 1466
96"W	9120R9636	841W	960W	301D	360D	\$ 1367	\$ 1433	\$ 1500
108"W	9120R10836	961W	1080W	301D	360D	\$ 1517	\$ 1591	\$ 1667
120"W	9120R12036	1081W	1200W	301D	360D	\$ 1666	\$ 1747	\$ 1830

Worksurfaces

Notes

For specification information see pages 37-45.

GSA SIN 711-1

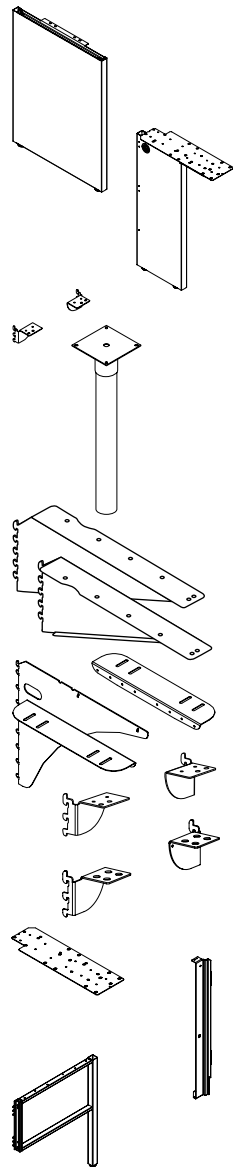

Description	Model	P1 Paint List Price	P2 Paint List Price
End-Panel Supports			
11"D x 29½"H — Left — Panel-Mount	TKEP1129PL	\$ 192	\$ 227
11"D x 29½"H — Right — Panel-Mount	TKEP1129PR	\$ 192	\$ 227
24"D x 29½"H — Left — Panel-Mount	TKEP2429PL	\$ 205	\$ 240
24"D x 29½"H — Right — Panel-Mount	TKEP2429PR	\$ 205	\$ 240
30"D x 29½"H — Left — Panel-Mount	TKEP3029PL	\$ 224	\$ 259
30"D x 29½"H — Right — Panel-Mount	TKEP3029PR	\$ 224	\$ 259
Support Legs			
24"D x 29½"H — Panel-Mount	TKSL2429P	\$ 181	\$ 216
30"D x 29½"H — Panel-Mount	TKSL3029P	\$ 198	\$ 233
Support Columns			
29½"H / 3"Diameter	TT629SC	\$ 172	\$ 207
Cantilever Brackets			
12"D Left-Hand	T6CB12L	\$ 48	\$ 61
12"D Right-Hand	T6CB12R	\$ 48	\$ 61
18"D Left-Hand	T6CB18L	\$ 52	\$ 65
18"D Right-Hand	T6CB18R	\$ 52	\$ 65
24" or 30"D Left-Hand	T6CB24L	\$ 58	\$ 71
24" or 30"D Right-Hand	T6CB24R	\$ 58	\$ 71
Cantilever Bracket — non-handed (Core paint colors only)			
24" or 30"D	T624CB	\$ 139	N/A
Worksurface Bracket Kit			
One pair	T6BK	\$ 49	\$ 61
Worksurface Storage Bracket Kit (no color option)			
One Pair	T6SB	\$ 67	N/A
Flat Brackets (no color option)			
For 12"D	T612FB	\$ 44	N/A
For 24"D	T624FB	\$ 49	N/A
For 30"D	T630FB	\$ 57	N/A
Pedestal-to-Panel Bracket			
Left	TKPPBL	\$ 82	\$ 95
Right	TKPPBR	\$ 82	\$ 95
Open End Panel Supports			
12"D x 29½"H Panel-Mount	AYBHEP1229	\$ 182	\$ 217
24"D x 29½"H Panel-Mount	AYBHEP2429	\$ 192	\$ 227
30"D x 29½"H Panel-Mount	AYBHEP3029	\$ 207	\$ 242

All Optimize models are available in the **Everyday Advantage®** program, see page 9 for details.


How to specify — Select the Model Number from above.	1st Option: Paint (if applicable): See inside front cover for finishes.
---	---

Examples: TKEP1129PL.P02 T6SB

Shippable by small-package carrier.

For specification information see pages 47-55.

GSA SIN 711-1

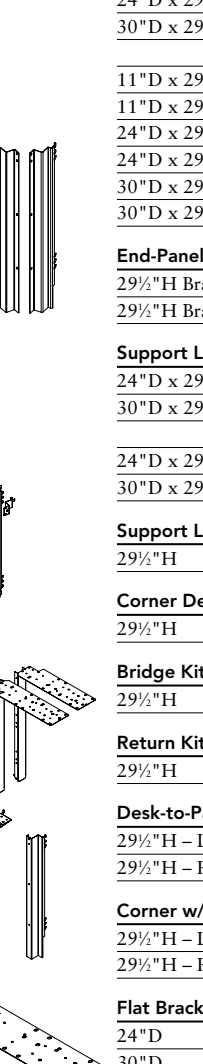	Description		Model		P1 Paint List Price	P2 Paint List Price
	End-Panel Supports					
	11"D x 29½"H — Freestanding		CEP1129F		\$ 170	\$ 205
	24"D x 29½"H — Freestanding		CEP2429F		\$ 183	\$ 218
	30"D x 29½"H — Freestanding		CEP3029F		\$ 202	\$ 237
	11"D x 29½"H — Left – Panel-Mount		TKEP1129PL		\$ 192	\$ 227
	11"D x 29½"H — Right – Panel-Mount		TKEP1129PR		\$ 192	\$ 227
	24"D x 29½"H — Left – Panel-Mount		TKEP2429PL		\$ 205	\$ 240
	24"D x 29½"H — Right – Panel-Mount		TKEP2429PR		\$ 205	\$ 240
	30"D x 29½"H — Left – Panel-Mount		TKEP3029PL		\$ 224	\$ 259
	30"D x 29½"H — Right – Panel-Mount		TKEP3029PR		\$ 224	\$ 259
	End-Panel Bracket Kits for Optimize					
	29½"H Bracket Kit — Left		TKEB29L		\$ 39	\$ 52
	29½"H Bracket Kit — Right		TKEB29R		\$ 39	\$ 52
	Support Legs					
	24"D x 29½"H — Freestanding		CSL2429F 		\$ 158	\$ 193
	30"D x 29½"H — Freestanding		CSL3029F 		\$ 176	\$ 211
	24"D x 29½"H — Panel-Mount		TKSL2429P		\$ 181	\$ 216
	30"D x 29½"H — Panel-Mount		TKSL3029P		\$ 198	\$ 233
	Support Leg Bracket for Optimize					
	29½"H		TKSB29		\$ 39	\$ 52
	Corner Desk Leg					
	29½"H		CDL29 		\$ 147	\$ 168
	Bridge Kit					
	29½"H		CBK29 		\$ 152	\$ 165
	Return Kit					
	29½"H		CRK29 		\$ 79	\$ 89
	Desk-to-Panel Attachment Kits for Optimize					
	29½"H – Left-Hand		TKDPA29L		\$ 78	\$ 91
	29½"H – Right-Hand		TKDPA29R		\$ 78	\$ 91
	Corner w/Desk Panel Attachment Kit for Optimize					
	29½"H – Left-Hand		TKCWD29L		\$ 78	\$ 91
	29½"H – Right-Hand		TKCWD29R		\$ 78	\$ 91
	Flat Brackets					
	24"D		831124 		\$ 49	N/A
	30"D		831130 		\$ 54	N/A
	Note: Flint only.					
	Optimize Wall Track Kit — End/Shared					
	65"H — Pair of Ends		TK365YEB 		\$ 212	\$ 254
	65"H — Middle Unit		TK365YM 		\$ 112	\$ 136

E All Optimize models are available in the **Everyday Advantage®** program, see page 9 for details.


<i>How to specify —</i> Select the Model Number from above.	<i>1st Option:</i> Paint: P1 P2 See inside front cover for finishes.
---	--

Examples: CEP1129F.P02 831124


S *Shippable by small-package carrier.*

For specification information see pages 47-55.


GSA SIN 711-1




Description	Model	P1 Paint List Price	P2 Paint List Price
Modesty Panels			
29½"H x 24"W	CS249	\$ 164	\$ 185
29½"H x 30"W	CS309	\$ 170	\$ 191
29½"H x 36"W	CS369	\$ 174	\$ 195
29½"H x 42"W	CS429	\$ 178	\$ 199
29½"H x 48"W	CS489	\$ 181	\$ 202
29½"H x 54"W	CS549	\$ 183	\$ 204
29½"H x 60"W	CS609	\$ 186	\$ 207
29½"H x 66"W	CS669	\$ 189	\$ 210
29½"H x 72"W	CS729	\$ 196	\$ 217




Stand-alone Corner Modesty Panels			
29½"H x 36"W	CSCMP3629	\$ 174	\$ 195
29½"H x 42"W	CSCMP4229	\$ 178	\$ 199
29½"H x 48"W	CSCMP4829	\$ 181	\$ 202
29½"H x 60"W	CSCMP6029	\$ 186	\$ 207
29½"H x 72"W	CSCMP7229	\$ 196	\$ 217




Modesty Panels			
14"H x 24"W	CS244	\$ 155	\$ 176
14"H x 30"W	CS304	\$ 159	\$ 180
14"H x 36"W	CS364	\$ 163	\$ 184
14"H x 42"W	CS424	\$ 168	\$ 189
14"H x 48"W	CS484	\$ 173	\$ 194
14"H x 54"W	CS544	\$ 176	\$ 197
14"H x 60"W	CS604	\$ 181	\$ 202
14"H x 66"W	CS664	\$ 183	\$ 204
14"H x 72"W	CS724	\$ 186	\$ 207



Stand-alone Corner Modesty Panels			
14"H x 36"W	CSCMP3614	\$ 163	\$ 184
14"H x 42"W	CSCMP4214	\$ 168	\$ 189
14"H x 48"W	CSCMP4814	\$ 173	\$ 194
14"H x 60"W	CSCMP6014	\$ 181	\$ 202
14"H x 72"W	CSCMP7214	\$ 186	\$ 207



Pedestal-to-Pedestal Modesty Panel			
27"H x 30"W to create a 60"W Desk	TKMP60	\$ 174	\$ 195
27"H x 36"W to create a 66"W Desk	TKMP66	\$ 176	\$ 197
27"H x 42"W to create a 72"W Desk	TKMP72	\$ 182	\$ 203



Gussets			
One pair	CDG	\$ 119	\$ 140

Modesty Panels			
41"W for 60"L Peninsula	PMP41	\$ 228	\$ 228
47"W for 66"L Peninsula, 72"L P-Shape, or 66"L Jetty	PMP47	\$ 233	\$ 233
53"W for 72"L Peninsula, Jetty, or Boomerang	PMP53	\$ 239	\$ 239

E All Optimize models are available in the **Everyday Advantage®** program, see page 9 for details.

How to specify —
Select the
Model Number
from above.

1st Option:


Paint:

See inside front
cover for finishes.



Examples: TKMP60.P4J CS244.P28

Shippable by small-package carrier.






Metal Overheads & Shelves

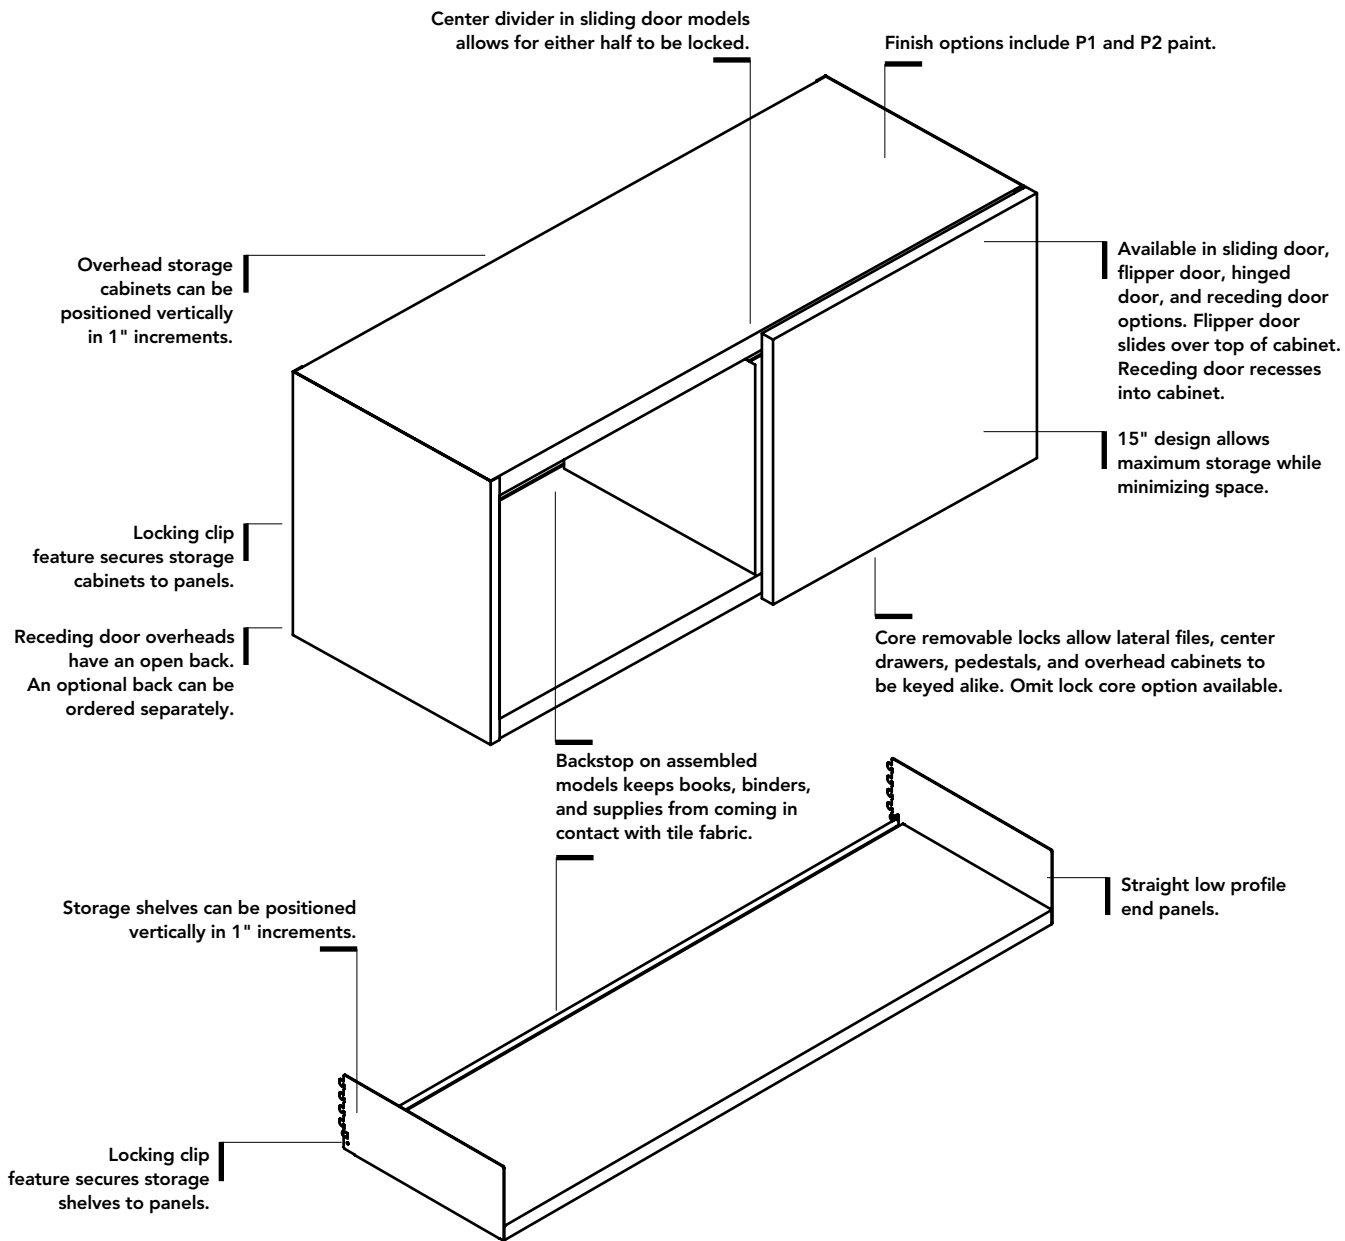

Product dimensions	
Overhead Storage Cabinet	
Width	24", 30", 36", 42", 48", 60", and 72"
Inside width	Flipper or 24"-36"W Hinged door — $\frac{3}{8}$ " less than width 42"-48"W Hinged or Sliding door — two compartments that are half of $\frac{3}{8}$ " less than width
Depth	14 $\frac{1}{4}$ " RTA models 12"
Inside depth	12 $\frac{7}{8}$ " Receding door 12 $\frac{1}{2}$ " RTA models 11 $\frac{5}{8}$ "
Height	15"
Inside height	12 $\frac{3}{4}$ " Receding door 11 $\frac{5}{8}$ " RTA models 12 $\frac{3}{4}$ "
Open Shelf	
Width	24", 30", 36", 42", 48", 60", and 72"
Depth	12 $\frac{7}{8}$ " RTA models 11 $\frac{1}{2}$ "
Height	4 $\frac{5}{8}$ " RTA models 5 $\frac{5}{8}$ "



- **Task lights** can be mounted beneath storage shelves and overhead storage cabinets.
- Additional panel hung and freestanding lighting options are available.
- **Cord retainer clips** fasten into panel slots to anchor power cords.
- Available in black only.
- Clips are provided with under-shelf mounted task lights. Additional clips can be purchased separately.

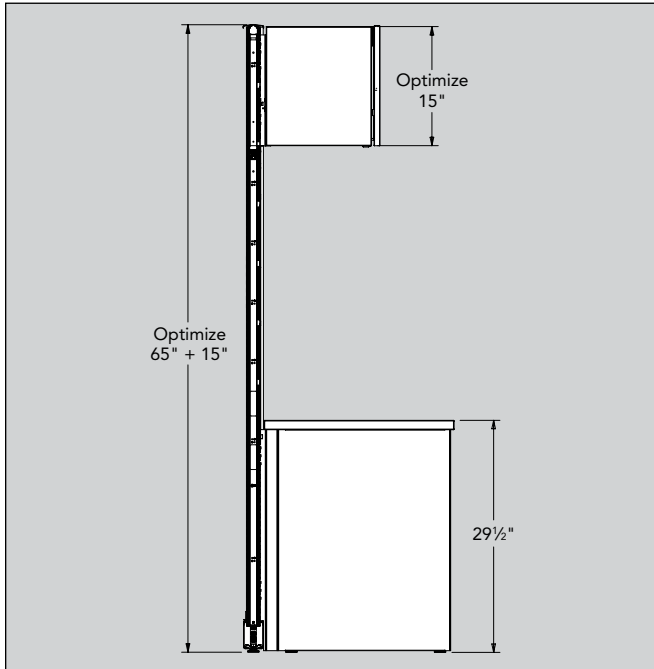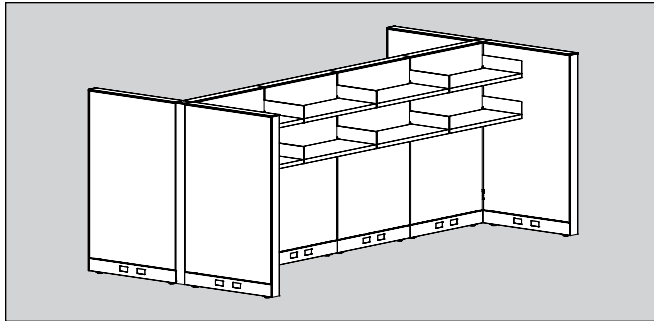

Specification Guidelines

- In a panel run, only two overhead storage cabinets or open storage shelves are recommended per panel side.
- Overhead storage cabinets and open storage shelves can be mounted on Optimize structural and stacking panels to a maximum height of 80"H.
- Base panel frames with stacking frames that have an overall height of 57½" will not accept overhead storage cabinets if spanning between stacker and base panel.
- Immediate adjacent panels must be equal height to panels with overhead storage cabinets on them.

When overhead storage units are suspended from stacking frames, the following guidelines should be adhered to:


- Stacking panels can be added to any base panel up to 80"H.
- Stacking frames should be added to all the parent run panels, and to each return-panel run. Stacking panels added to return panel must match the parent run configuration.
- A maximum of two overhead storage units should be suspended from each side of stacking frames on any given panel.

- No limitation to the number of units on structural frames when run is supported with return panels on each side of storage shelves or overhead storage cabinets.


- **Assembled metal overhead cabinets** can be mounted on a panel equal to or up to 18" narrower than cabinet.
- One side of overhead must be held on-module.

- **RTA overhead, RTA shelf, and receding door** width must correspond with width of panel(s).
- It is possible to span two panels when combined panel width equals cabinet or shelf width.


Overheads, Shelves, and Hutches




Sliding Door Overhead




Flipper Door Overhead




Hinged Door Overhead



Open Shelf



Upmount Kit for Overhead Cabinets



Horizontal Wall Track

Assembled Overhead Storage Cabinet (page 74)

- Steel cabinet with backstop.
- Available with sliding, hinged, or flipper door(s).
- Easy-Assist flipper door optional — requires minimal assistance in opening and closing.
- Easy-Assist flipper door not available on 60"W or 72"W cabinets — specify 2–30"W cabinets or 2–36"W cabinets.
- Self-engaging safety latch to secure cabinet to panel.
- Width can correspond with width of panel, or two panels joined with an inline connector kit.
- Arch or square pull optional on flipper doors.
- 60"W and 72"W flipper door cabinets have two doors with two independent locks.
- 24"-36"W hinged door cabinets have 1 lock and 2 optional pulls, 42"-48"W have 2 locks and 4 optional pulls.
- Accommodates recessed task lighting (specified separately).
- For locking specifications, see pages 122-124.
- Cabinets are 14¼"D x 15"H.
- 15"H cabinets can also be mounted on a panel equal to or up to 18" narrower than cabinet.
- Sliding doors have a built-in pull.
- Sliding, Hinged, and Flipper Door Overhead Weight Limits:

24"W	59 lbs.	42"W	105 lbs.
30"W	74 lbs.	48"W	121 lbs.
36"W	90 lbs.	60"W	152 lbs.
- Mounting an overhead on frames that have an overall height of 57½"H is not recommended. Slot modularity in relation to adjacent panels may be compromised.

Assembled Open Shelf (page 74)

- Metal shelf with back stop.
- Locking clips (2) standard.
- Will accommodate recessed task lighting (ordered separately).
- Weight Limits:

24"W	61 lbs.	42"W	108 lbs.
30"W	77 lbs.	48"W	124 lbs.
36"W	93 lbs.	60"W	155 lbs.
- Mounting an open shelf on Optimize frames cannot span base panel frame and stack-on frame — slot modularity is not maintained.


Upmount Kits for Assembled Overhead Cabinets (page 74)

- Consists of two upmount brackets, full back panel, and required installation hardware.
- Allows mounting of an assembled overhead cabinet up to 15" above height of panel.
- Specify "Z2" prefix model number upmount kits with 15"H, 35"H, 50"H, or 65"H Optimize panels; and "Z4" prefix model number upmount kits with 42½"H Optimize panels.
- Brackets require a clearance of 6½" below bottom of overhead cabinet.
- Width must correspond with width of panel frame or 2 panel frames joined directly inline.
- Full back panel adds ½" to depth of overhead case.
- Full back panel only used when upmounting cabinet.
- Cannot be used with RTA models.

Horizontal Wall Track (page 74)

- Allows mounting assembled overhead cabinets on permanent wall structures ONLY. Attachment hardware not included.
- Cannot be used with RTA models.
- Track is 60"W and notched at 6" intervals as a guide for field cutting.
- For use with 15"H sliding door overhead, field modification is necessary.
- Available in black only.


Overheads, Shelves, and Hutches



Assembled Receding Door Overhead Storage Cabinet (page 75)


- Steel cabinet with open back. Optional back can be ordered separately.
- Arch or square pull optional.
- 60"W cabinet has 2 – 30"W doors with 2 independent locks.
- Accommodates recessed task lighting — ordered separately.
- For locking specifications, see pages 122-124.
- Cabinets are 13¼"D x 15"H. When door is recessed, interior dimensions are 12⅞"D x 11⅞"H.
- Weight Limits:

30"W	70 lbs.	48"W	110 lbs.
36"W	85 lbs.	60"W	138 lbs.
42"W	100 lbs.		




Receding Door Overhead Back (page 75)

- Optional for use with receding door overhead.
- Order width to match overhead cabinet.




Ready to Assemble (RTA) Flipper Door Overhead (page 75)

- Steel cabinet with open back.
- 60"W and 72"W cabinets have 2 doors with independent locks.
- Accommodates recessed task lighting — ordered separately.
- Random keying, for locking specifications see pages 122-124.
- Cabinets are 12"D x 15"H. Interior dimensions 11⅞"D x 12¾"H.



Ready to Assemble (RTA) Shelf (page 75)


- Metal shelf with locking clips.
- Accommodates recessed task lighting — ordered separately.



Stack-On Hutch

Stack-on Hutch (page 76)

- Have flipper doors with square horizontal edges.
- Universal model can be converted to an open hutch.
- Doors are standard with a core removable lock (60"W, 66"W and 72"W have two doors and two locks.)
- Attachment tape provided.
- Order hutch to match width of worksurface(s) it covers.
- Hutches have clearance of 19¼" for computers, etc.
- Depth dimensions shown includes thickness of door.
- Universal model inside depth dimension is 12¾".
- Stack-on hutches accommodate recessed task lighting.
- For locking specification see pages 122-124.
- Chicago task light cords cannot be routed through the hutch end panels, due to the large size of the fused plugs.



Tackboards for
Hutches

Tackboards (page 76)







- Use tackboard to close the back of stack-on or hutch below storage unit.
- Due to width of fabric roll, 72"W tackboards are available in railroad cut only.

Metal Overheads

Optimize™ — Overheads / Shelves and Mounting Kits

For specification information see pages 70-73.

GSA SIN 711-1

	Description	Model	P1 Paint List Price	P2 Paint List Price
	15"H x 14¼"D Sliding Single Door Overhead Cabinets			
	24" W	OH1524SD	\$ 620	\$ 688
	30" W	OH1530SD	\$ 634	\$ 702
	36" W	OH1536SD	\$ 665	\$ 733
	42" W	OH1542SD	\$ 696	\$ 764
	48" W	OH1548SD	\$ 726	\$ 794
	60" W	OH1560SD	\$ 959	\$ 1027
	15"H x 14¼"D Flipper Door Overhead Cabinets			
	24" W	OH1524FD	\$ 620	\$ 688
	30" W	OH1530FD	\$ 634	\$ 702
	36" W	OH1536FD	\$ 665	\$ 733
	42" W	OH1542FD	\$ 696	\$ 764
	48" W	OH1548FD	\$ 726	\$ 794
	60" W	OH1560FD	\$ 959	\$ 1027
	72" W	OH1572FD	\$ 1297	\$ 1365
Note: Add suffix A for arch pull or S for square pull to model number — add \$32 per pull. For "Easy-Assist" on 24"W-48"W change FD suffix to FE – add \$191				
	15"H x 14¼"D Hinged Door Overhead Cabinets			
	24" W	OH1524HD	\$ 1033	\$ 1099
	30" W	OH1530HD	\$ 1079	\$ 1145
	36" W	OH1536HD	\$ 1130	\$ 1196
	42" W	OH1542HD	\$ 1178	\$ 1244
	48" W	OH1548HD	\$ 1222	\$ 1288
Note: Add suffix A for arch pull or S for square pull to model number — add \$32 per pull.				
	4⅞"H x 12⅞"D Open Shelf (to line up with 15"H Overheads)			
	24" W	ZS24 ☐ S	\$ 265	\$ 288
	30" W	ZS30 ☐ S	\$ 288	\$ 311
	36" W	ZS36 ☐ S	\$ 303	\$ 326
	42" W	ZS42 ☐ S	\$ 317	\$ 340
	48" W	ZS48 ☐ S	\$ 333	\$ 356
	60" W	ZS60	\$ 405	\$ 428
	72" W	ZS72	\$ 594	\$ 617
	Upmount Kits for Overhead Cabinets — Specify "Z4" prefix models with 42½"H panels; "Z2" for all other panel heights.			
	24" W	Z ☐ UP24	\$ 161	\$ 185
	30" W	Z ☐ UP30	\$ 168	\$ 192
	36" W	Z ☐ UP36	\$ 174	\$ 198
	42" W	Z ☐ UP42	\$ 183	\$ 207
	48" W	Z ☐ UP48	\$ 192	\$ 216
	60" W	Z ☐ UP60	\$ 204	\$ 228
	Shelf Dividers for Assembled Overhead Cabinets and Open Shelf			
	Package of 6	T7DV ☐ S	\$ 89	\$ 103
	Note: Not compatible with RTA models.			
	Horizontal Wall Track			
	60" W Track	TWTH	\$ 81	N/A

E All Optimize models are available in the **Everyday Advantage®** program, see page 9 for details.

How to specify — Select the Model Number from above. 	1st Option: Pull (if applicable): A Arch pull, add \$32 per pull S Square pull, add \$32 per pull	2nd Option: System (if applicable): YZ Optimize, Terrace, or Stride	3rd Option: Paint (if applicable): P1 P2 See inside front cover for finishes.	4th Option: Pull Color (if applicable): Arch: E4 Black EL Matte Silver Square: EL Matte Silver	5th Option: Lock Type (if applicable): STD Standard — Random Keyed OMT Omit Lock Core (Deduct \$18 per door)

Examples:

OH1536FEA.YZ.P01.E4.STD

OH1548FDS.YZ.P52.EL.OMT

OH1560SD.YZ.PR2.EL.STD

Z2UP24.P27 TWTH


☐ Shippable by small-package carrier.

Metal Overheads

Optimize™ — Overheads


For specification information see pages 70-73.

GSA SIN 711-1




Description	Model	P1 Paint List Price	P2 Paint List Price
15"H x 13 1/4"D Assembled Receding Door Overheads (inside dimensions with door recessed — 11 1/8"H x 12 1/2"D)			
30"W	OH1530RD	\$ 727	\$ 795
36"W	OH1536RD	\$ 768	\$ 836
42"W	OH1542RD	\$ 815	\$ 883
48"W	OH1548RD	\$ 883	\$ 951
60"W	OH1560RD	\$ 1337	\$ 1405

Note: Add Suffix **A** for arch pull or **S** for square pull option — add \$32 per pull.




15"H Receding Door Overhead Back

30" W	RD30FB	\$ 96	\$ 120
36" W	RD36FB	\$ 103	\$ 127
42" W	RD42FB	\$ 109	\$ 133
48" W	RD48FB	\$ 117	\$ 141
60" W	RD60FB	\$ 143	\$ 167



15"H x 12"D Ready to Assemble (RTA) Flipper Door Overhead (inside dimensions 12³/₄"H x 11⁵/₈"D)

24" W RTA — Flipper Door	POHRTA1524FD	\$ 486	\$ 554
30" W RTA — Flipper Door	POHRTA1530FD	\$ 498	\$ 566
36" W RTA — Flipper Door	POHRTA1536FD	\$ 521	\$ 589
42" W RTA — Flipper Door	POHRTA1542FD	\$ 546	\$ 614
48" W RTA — Flipper Door	POHRTA1548FD	\$ 569	\$ 637
60" W RTA — Flipper Door	POHRTA1560FD	\$ 752	\$ 820
72" W RTA — Flipper Door	POHRTA1572FD	\$ 1019	\$ 1087



5⁵/₈"H x 12"D Ready to Assemble (RTA) Shelf

24" W RTA — Shelf	POHRTA24S	\$ 238	\$ 260
30" W RTA — Shelf	POHRTA30S	\$ 257	\$ 279
36" W RTA — Shelf	POHRTA36S	\$ 273	\$ 295
42" W RTA — Shelf	POHRTA42S	\$ 285	\$ 307
48" W RTA — Shelf	POHRTA48S	\$ 299	\$ 321
60" W RTA — Shelf	POHRTA60S	\$ 365	\$ 387
72" W RTA — Shelf	POHRTA72S	\$ 533	\$ 555

E All Optimize models are available in the **Everyday Advantage®** program, see page 9 for details.

How to specify — Select the Model Number from above.	1st Option: Receding Door Pull (if applicable): A Arch Pull, add \$32 per pull S Square Pull, add \$32 per pull	2nd Option: System for Assembled Receding Door Overhead (if applicable): YZ Optimize, Terrace, or Stride	3rd Option: Paint: P1 P2 See inside front cover for finishes.	4th Option: Receding Door Pull Color (if applicable): Arch: E4 Black EL Silver Square: EL Silver	5th Option: Receding Door Lock (if applicable): STD Standard OMT Omit Lock Core (Deduct \$18 per door)
	.	Y Z .	P	E .	


Examples: OH1560RD.YZ.P7C.STD OH1536RDA.YZ.P27.E4.OMT
RD30FB.P27 POHRTA1536FD.P27

Metal Hutches


Optimize™ — Hutches, Tackboards, and Accessories

For specification information see pages 70-73.

GSA SIN 711-1



Description	Universal Model	P1 Paint List Price	P2 Paint List Price
Essentials Hutch w/Square Flipper Doors and Lock — 14½"D x 35"H			
36"W	UH6536FD □	\$ 715	\$ 786
42"W	UH6542FD □	\$ 748	\$ 819
48"W	UH6548FD □	\$ 773	\$ 844
60"W	UH6560FD □	\$ 1096	\$ 1167
66"W	UH6566FD □	\$ 1149	\$ 1220
72"W	UH6572FD □	\$ 1203	\$ 1274
Shelf Dividers			
Package of 6	T7DV [S]	\$ 89	\$ 103



Description	Universal Model	P1 Paint List Price — Fabric			P2 Paint List Price — Fabric		
		Grades A/B	Grades C/D	Grades E/F	Grades A/B	Grades C/D	Grades E/F
20"H Tackboards for Stack-on Hutches							
36"W Tackboard	UHTB36 	\$ 322	\$ 416	\$ 576	\$ 344	\$ 438	\$ 598
42"W Tackboard	UHTB42 	\$ 339	\$ 436	\$ 603	\$ 361	\$ 458	\$ 625
48"W Tackboard	UHTB48 	\$ 369	\$ 477	\$ 660	\$ 391	\$ 499	\$ 682
60"W Tackboard	UHTB60 	\$ 412	\$ 532	\$ 738	\$ 434	\$ 554	\$ 760
66"W Tackboard	UHTB66 	\$ 434	\$ 561	\$ 777	\$ 456	\$ 583	\$ 799
72"W Tackboard	UHTB72 	\$ 457	\$ 594	\$ 819	\$ 479	\$ 616	\$ 841

E All Optimize models are available in the **Everyday Advantage®** program, see page 9 for details.

How to specify — Select the Model Number from above. 	1st Option: Pull <i>(if applicable):</i> Add \$32 per pull. A Arch Pull S Square Pull N No Pull 	2nd Option: Paint: P1 P2 See inside front cover for finishes. P	3rd Option: Fabric <i>(if applicable):</i> Limited fabric offering available — see inside back cover for details. 	3rd Option: Lock Type <i>(if applicable):</i> STD Standard — Random Keyed OMT Omit Lock Core (Deduct \$18 per door) 	4th Option: Railroad Cut (Tackboard only): (Only applicable to 66" and 72"W Fabric Tackboards.) R R
---	--	--	--	---	---

Examples: UH6536FDN.P27.STD

UHTB66.P52.APN934.RR

[S] Shippable by small-package carrier.

EXTENSIONS

Introduction

Overview	103
----------------	-----

Organization Tools

Working with Organization Tools.....	104-106
Tool Rails	107
Work Tools.....	108
Marker Boards, Technology Modules, and Drawers.....	109

Ergonomic Accessories

Working with Ergonomic Accessories	110-115
Keyboard Supports, CPU Hammock, Corner Sleeve, and Footrest.....	116
Monitor Arms and Tablet Holders.....	117

Illumination

Working with Illumination.....	118-119
Task Lights	120
Undercabinet LED Lights, Link™ LED Lights, and Wand™ LED Light.....	121

Extensions — Introduction

Extensions accessory line by Allsteel is designed to help you create your own space.

• Create a unique space

Each person is unique, no one person works exactly like another, and different tasks require different tools. Extensions work tools allow each person the ability to create a unique environment that is all their own. Lots of paper to manage? Need active files within arm's reach? Want to maximize your worksurface space? Need light somewhere other than below a cabinet? Whatever the task, we have the tools to accommodate your workstyle.

• Create a comfortable space

With a full line of organization, ergonomic, and illumination tools, Extensions allow you to create a comfortable, ergonomic work area. Organization tools keep important items visible and within your reach. Ergonomic tools help you stay comfortable while working. Illumination tools allow you to put your light where it suits you.

• Create an organized space

Tired of all the piles of paper building up on your worksurface? Organization tools house your materials and keep them in an orderly fashion. With a combination of hanging or freestanding organizational accessories, Extensions let you manage everything from binders to paper clips.

• Organization tools

Work tools are a durable metal construction. Extensions allow you to manage your workspace smartly with tools like the phone caddy to elevate the phone off the worksurface, landscaped mail box trays to minimize worksurface intrusion, folder holders and tool box pen and pencil holders that hang off the slat rail and each other.

Increase your efficiency with organization!

• Ergonomic tools

Ergonomics is more than just comfort, it's flexibility and safety. The adjustable keyboard options allow users to maintain and vary comfortable wrist and arm positions throughout the day, whether typing or mousing. Monitor Arms offer versatile adjustability while providing optimum comfort for the eyes, neck, and shoulders.

• Illumination tools

Sleek and flexible, our lighting components offer you several choices. Recessed task lights conserve space and feature electronic ballast for longer bulb life and cooler operating temperature. LED tasklights' slim design blends in with its surrounding while utilizing energy-efficient LED technology. The Link light offers award-winning style to a highly versatile and energy efficient light.

Extensions™

Working with Organization Tools

GSA Reference Page


Allsteel's tool rail works in conjunction with a variety of accessories. Modular accessories free up worksurface space and provide orderly storage that is well within reach. Units can be arranged and rearranged to respond to changing workflow. The work tools that attach to the tool rail are:

- Mail Box
- Folder Holder
- Phone Caddy
- Binder Bin
- Tool Box
- Clip Caddy™
- Sidebar™ Personal Shelf
- Paper Wave™
- Gripper Clip

Additional accessories that work with the **tool rail work tools** aesthetically are:

- Bookends
- Freestanding Mail Box

Coat hooks, marker boards and center drawers round out the organization offering.

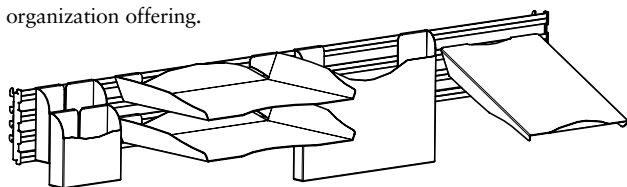

Tool rail, shown above, is height-adjustable in 1" increments using slots in panels or metal hutch. Tool rail shown with two tool boxes, two mail boxes, folder holder, and phone caddy. Folder holders and binder bins extend below a tool rail. Paper Wave and contents extend above a tool rail.



Tool Rails and Work Tools (page 107)

- Sturdy aluminum extrusion with steel support construction.
- Powder coated for durable finish.
- Use to hang Extensions tools. Cannot be used to support monitor arms.
- Suggested weight capacity not to exceed 80 lbs.
- Consideration needs to be given to height of tools and location of worksurfaces.
- For use with Stride®, Terrace®, Concensys®, and Optimize™ systems.
- 5" high rail (widths coordinate with panels).
- Attachment via vertical reveals.
- Can be hung from wall track. Good solution for above copiers.
- Systems tool rail is off-modular — can be used on a panel of equal width or one size smaller.
- May span two panels of appropriate size, i.e., 60" W Tool Rail on two 30" W panels.

Tool Rail for Hutches (page 107)

- Will work on Universal, Terrace, Optimize, and Concensys system hutches produced after July 2, 2000 and Align™ metal hutches.
- Sturdy aluminum extrusion with steel support construction.
- Powder coated for durable finish.
- Use to hang Extensions tools. Cannot be used to support monitor arms.
- Suggested weight capacity not to exceed 80 lbs.
- Consideration needs to be given to height of tools and location of worksurfaces.

Mail Box (page 108)

- Holds standard letter-size paper and inter-office envelopes.
- Minimal horizontal intrusion.

Folder Holder (page 108)

- Holds manila envelopes.
- Is capable of hanging on other folder holders to maximize space.
- Stores vertically for easy access to files.

Phone Caddy (page 108)

- Holds telephone at optimum ergonomic angle.
- Wire management cut-outs.
- Accommodates standard phone sizes.

Binder Bin (page 108)

- Holds folders, binders, and manuals.

Tool Box (page 108)

- Holds pencils and other writing utensils, large post-it notes, and other desk top accessories.

Clip Caddy™ (page 108)




- Holds paper clips and other small objects.

Sidebar™ Personal Shelf (page 108)

- Holds office supplies and personal effects.

Paper Wave™ (page 108)


- Provides 3 fully divided slots for organizing files.
- Keeps papers from "bowing" at bottom.






Gripper Clip (page 108)

- Binds project papers together.
- Mounts to tool rail or tool tile.



Bookends (page 108)

- Can be used on shelves or in cabinets.
- Used to hold books, binders, and catalogs upright.




Freestanding Mail Box (page 108)

- Incorporates similar aesthetic to mounted Mail Box.
- Mounting brackets allow for free access from front and back.
- Sold in pairs of two; will stack up to eight high.
- Individual mail box dimension = 1 3/4" H.
- Stacking brackets are black.




Coat Hook APMC6 (page 108)

- Hangs directly into slotted Stride®, Terrace®, Optimize™, or Concensys® panel frame. Use for coat or bag.
- Package of six. Available in black only.




Power/Data Modules — Clamp On Worksurface (page 109)

- On-surface mounting option, fits on any worksurface with a 4" overhang.
- 6' Power cord. UL Listed.
- Includes adapters to allow use of commercially available data terminals or blanks to fill unused openings. Many of the AMP, AT&T, Krone, Leviton and most commercial data terminals can be used.




Power/Data Modules — Clamp On Worksurface (page 109)

- Worksurface clamp can be used on any surface with a 2 1/2" overhang.
- Must be installed at time of initial worksurface installation if installing between a worksurface and panel.
- 6' Power cord. UL Listed.
- The USB hub allows simultaneous powering of 2 USB-A devices. The USB hub is a charger only, no ability to connect to a PC. The charging capacity is limited and may not charge all devices.




Power/Data Modules — Under Worksurface (page 109)

- Under surface mounting can be used on any surface with a 5" clearance.
- 6' Power cord. UL Listed.



Technology Modules (page 109)

- Can be mounted by clamping to worksurface or mounting flush to the worksurface top.
- Must be installed at time of initial worksurface installation if mounting between a worksurface and panel.
- The USB hub allows simultaneous powering of four USB-A devices. The USB hub is a charger only, no ability to connect to a PC. The charging capability is limited and may not charge all devices.
- Opening size needed to flush mount in worksurface.



Model	Depth of Cut	Width of Cut
A87P2U1R	4"	8"
A87P2D1R	4"	8"


Byrne's Docking Station for iPod® and iPhone® (page 109)

- The iDoc charges and syncs with patent pending Roc.in.Doc™ technology eliminating the need for charging adapters.
- The mount provides quick access to the iPod or iPhone display for easy user control.
- Contact Byrne to check for compatibility with the latest technology.




Worksurface Power/Data Module (page 109)


- Provides easy access to technology at primary worksurface.
- Mounts to edge of a worksurface and requires 3/8" gap. Consider whether 3/8" gap will work with layout.
- Must be mounted at time of initial worksurface installation if mounting between a worksurface and a panel. Maintaining 3/8" gap may not be possible with worksurfaces that are panel wrapped.

**Marker Board** (page 109)

- For use with dry marking pens.
- Hangs directly on Optimize™ or Concensys® panel frame.
- Brackets are installed for Concensys applications.
- Brackets must be field re-located for use with other systems.
- Porcelain-coated steel surface.
- White with silver trim.
- Width must correspond with width of panel.

**Metal Center Drawers** (page 109)

- All metal center drawers feature pencil trays with three compartments for storage.
- Center drawers will not fit in center of 24" D worksurfaces which are wider than 60" due to location of center support bracket.
- For locking specifications, see pages 122-124.
- Ball-bearing slide suspension.

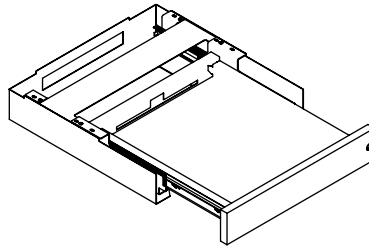
**Laptop Drawer — U7WDA** (page 109)

- Drawer body made of sheet metal.
- Drawer front made of 3/4" particle board with high pressure laminate on both sides and fused laser edge banding.
- Core removable lock is located on right side drawer front
- 17 5/8" W x 18" D x 3 3/8" H Outside (interior 13" W x 16" D x 1 7/8" H)
- Minimum surface depth is 21" for surfaces not using an external stiffener; and 27" for surfaces using an external stiffener.
- Drawer extends 16"
- Maximum load: 45 lbs (functional BIFMA load)
- Drawer assembly and cover have cut out in back to allow for cables to exit drawer.
- Distance from floor to bottom of unit w/glides fully retracted is 24 3/4".
- Does not interfere with Further leg mounting plates so drawer can be placed directly next to either a system or table leg.
- When being placed next tower storage using the tower ell bracket (Z6LB) to support surface the drawer must be inset 3" to clear the ell bracket.
- Can be placed directly next to any support storage from any Allsteel product line (excluding towers).
- Flat brackets — drawer must be offset 3" from seam between surfaces to clear the bracket. See illustration at left.
- Can be used with rabbet edge worksurface models but there will be a larger reveal between surface and drawer.
- Can be used with knife edge worksurface models but reveal and depth need to be considered.

Flat Brackets



Front View

Top View

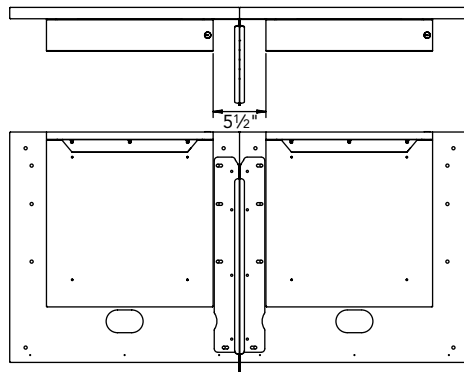

For specification information see pages 104-105.

GSA SIN 711-1



Description	Model	P1 Paint List Price	P2 Paint List Price
5"H Tool Rails — for Panels			
24"W	EASR24	\$ 162	\$ 194
30"W	EASR30	\$ 172	\$ 204
36"W	EASR36	\$ 181	\$ 213
42"W	EASR42	\$ 189	\$ 221
48"W	EASR48	\$ 193	\$ 225
60"W	EASR60	\$ 227	\$ 259
5"H Tool Rails — for Metal Hutches			
36"W	EAHSR36	\$ 181	\$ 212
42"W	EAHSR42	\$ 189	\$ 220
48"W	EAHSR48	\$ 193	\$ 224
60"W	EAHSR60	\$ 227	\$ 258
66"W	EAHSR66	\$ 235	\$ 266
72"W	EAHSR72	\$ 252	\$ 283

E All Extensions models are available in the **Everyday Advantage®** program, see page 9 for details.

How to specify — Select the Model Number from above.	1st Option: Paint: See inside front cover for finishes.
---	---

Example: EASR36.P02






Shippable by small-package carrier.

ExtensionsTM

Organization Work Tools

For specification information see pages 104-105.

GSA SIN 711-1

	Description	Model	P1 Paint List Price	P2 Paint List Price
	Mail Box 9"D x 15"W	EAPT 	\$ 81	\$ 97
	Folder Holder 9"H x 12"W	EAFS 	\$ 83	\$ 99
	Phone Caddy 9"W x 11"D	EATS 	\$ 101	\$ 117
	Binder Bin 8½"H x 5¼"W x 10"D	EABS 	\$ 81	\$ 97
	Tool Box 5"H x 5¼"W x 1½"D	EADH 	\$ 65	\$ 81
	Clip CaddyTM 2"H x 7"W x 3½"D	EAAC 	\$ 58	\$ 74
	SidebarTM Personal Shelf 2"H x 21"W x 7"D	EAPS 	\$ 83	\$ 99
	Paper WaveTM Tray size: 2½"H x 6"W x 10"D Dividers: 9½"H x 9"W	EASS 	\$ 115	\$ 131
	Gripper Clip Package of 2 — 5"W x 2"H	EAPC 	\$ 83	\$ 99
	Bookends (specify paint color) Pair — 8"H x 6"W x 4"D	EABE 	\$ 78	\$ 94
	Freestanding Mail Box (specify paint color) Pair — 4⅞"H x 13¼"W x 9"D	EAFT 	\$ 166	\$ 182
	Coat Hooks (black only) Package of six	APMC6 	\$ 81	N/A

E All Extensions models are available in the **Everyday Advantage[®]** program, see page 9 for details.


How to specify — Select the Model Number from above.	1st Option: Paint: P1 P2 See inside front cover for finishes. P
---	--

Examples: EAPT.P4J EABE.P4J APMC6.P


 Shippable by small-package carrier.

For specification information see pages 105-106.


GSA SIN 711-1




Description	Model	List Price
Marker Board		
36"W x 24"H	AMRK36	\$ 470
42"W x 24"H	AMRK42	\$ 511
48"W x 24"H	AMRK48	\$ 529



Description	Model	List Price
Power/Data Modules — Worksurface Clamp		
Dome — 2 Power, 2 Open Data with faceplate adaptors (FOG Fog only)	ACOMDOME2	\$ 310
2 Power, 2 USB (SNW Snow or STRM Storm)	APWRMOD2WC	\$ 426
3 Power (SNW Snow or STRM Storm)	APWRMOD3WC	\$ 329




Power/Data Modules — Under Worksurface Mount		
2 Power, 2 USB (SNW Snow or STRM Storm)	APWRMOD2UWM	\$ 426
3 Power (SNW Snow or STRM Storm)	APWRMOD3UWM	\$ 329



Technology Modules — Worksurface Clamp (EL Silver only)		
2 Power, 2 dual USB Hubs	A87P2U1C	\$ 644
2 Power, 1 iPod Hub	A87P2D1C	\$ 787
2 Power, 1 USB, and 1 iPod Hub	A87P2U1D1C	\$ 960


Technology Modules — Flush Mount (EL Silver only)		
2 Power, 1 USB Hub	A87P2U1R	\$ 687
2 Power, 1 iPod Hub	A87P2D1R	\$ 831

Worksurface Power/Data Module (PR6 Silver only)		
2 Simplex receptacles, 1 data position	A870302	\$ 241




Angled front

Description	Model	List Price		
		P1	P2	P3
Metal Center Drawer w/Lock				
19"W x 14¼"D x 3"H	CSDC19	\$ 187	\$ 205	N/A
12" drawer extension (3/4). - Inside drawer dimension: 19"W x 13"D x 2⅝"H. - Minimum clearance for mounting: 21¼"W x 19¼"D.				



Angled front

24½"W x 14¼"D x 3"H	CSDC25	\$ 192	\$ 210	N/A
12" drawer extension (3/4). - Inside drawer dimension: 24½"W x 13½"D x 2⅝"H. - Minimum clearance for mounting: 27⅞"W x 19¼"D.				







Laptop Drawer - Locking, laminate front, metal case				
17½"W x 18"D x 3½"H	U7WDA	\$ 1063	\$ 1082	\$ 1098
16" drawer extension - Inside drawer dimensions: 13"W x 16"D x 1⅞"H - Minimum clearance for mounting: 17⅞"W x 21"D x 3⅜"H				

All Extensions models are available in the **Everyday Advantage®** program, see page 9 for details.

How to specify — Select the Model Number from above.	1st Option: Laminate (Laptop drawer front if applicable): See inside front cover for finishes.	2nd Option: Edge (Laptop drawer edge if applicable): See inside front cover for finishes.	3rd Option: Paint (If laptop drawer, list exterior case color here): See inside front cover for finishes. Power Data Module PR6 Silver.	4th Option: Paint (Interior of laptop drawer if applicable): See inside front cover for finishes.	5th Option: Lock (if applicable): STD Standard OMT Omit (Deduct \$18)	6th Option: Lock or Tech Module Color (if applicable): EL Silver (Lock)

Examples: AMRK36 U7WDA.LM11EV.P27.PR6.STDEL

Shippable by small-package carrier.

Articulating Keyboard Supports				
Features	Model AKM5	Model AKM3	Cobra™ Model AKMX	Model AKM1
				
Keyboard Support	Platform style 18¾"W x 11½"D	Platform style 18¾"W x 11½"D	Platform Style 19"Wx11"D	Platform style 25"W x 10½"D
Keyboard Support Material	Phenolic	Phenolic	Phenolic	Polyethylene Made of 90% post-consumer materials and completely recyclable. Free of formaldehydes and carcinogens and emit no VOCs.
Suspension	• Nylon glides on lubricated slide track • Intuitive lift and lock one touch height adjustment • Visual height indicator gauge	• Nylon glides on lubricated slide track • Intuitive lift and lock one touch height adjustment	Lubricated slide track system: spring assisted	Nylon glides on lubricated slide track system — spring assisted
Platform Rotation	360 degrees	360 degrees	360 degrees	360 degrees
Platform Tilt	+10/-15 degrees	+/- 15 degrees	+10/-20 degrees	+10/-15 degrees
Platform Tilt Adjustment	Soft touch knob for precise tilt adjustment; visual indicator gauge	Release handle for independent tilt adjustment	Convenient tilt wheel assists desired tilt angle	Soft touch knob for simultaneous height and tilt adjustment
Platform Height Adjustment Range	8¾" (1¼" above to 6¾" below)	7" (2½" above to 4½" below) Can position platform to be flush with worksurface for extended work area	12½" (7" above to 5½" below)	6¾" (1¼" above to 5" below)
Platform Height Adjustment	Lift platform to raise, lift slightly and tilt back to lower	Lift platform to raise, lift slightly and tilt back to lower	Lift platform to raise, lift slightly and tilt back to lower	Turn knob to release platform; adjust to desired height and tilt; tighten knob to secure
Palm Rest	Detachable leatherette-covered gel palm rest	Detachable leatherette-covered gel palm rest	Fabric covered gel palm rest	Detachable leatherette-covered gel palm rest
Mouse Pad	Independent tilt and swivel with reversible design; mouse platform clicks in on left or right side, no tools required	Independent tilt and swivel with reversible design; mouse platform clicks in on left or right side, no tools required	Circular, swivel, tilt, LH/RH mounting, mouse catcher, gel rest	In-line to accommodate mouse on same level as keyboard
Microsoft Natural Compatible	No	No	Yes — by removing palm rest	Yes — by removing palm rest
Track Depth	21¾"	21"	23"	17"
Required Mounting Clearance	18¾" W x 21¾"D + ¼" Recess	18¾"W x 21"D + ¼" Recess	19"W x 23"D + ¼" Recess	25"W x 17"D + ¼" Recess
Adjustable Wrist Rest	No	No	Fixed mounting and height	No
Ideal For	• Straight worksurfaces • ADA/HFES compliance • Extensive adjustability with mouse in line, mouse over or mouse forward of keyboard	• Multiple users • Straight worksurfaces • Extensive adjustability with mouse in line, mouse over or mouse forward of keyboard	• Corner worksurface applications • Sit to stand applications	• Shallow worksurfaces • Stride Beam-Based Benching • Corner worksurface (17" or 21") • Radius worksurface (42" or 48")
Additional Information	• Leatherette-covered palm rests are free of formaldehydes and carcinogens. Can be cleaned and sanitized. Entire palmrest can be removed for thorough cleaning of the platform • Track can be cut in the field to shorten track depth — may affect ability to fully recess platform	• Leatherette-covered palm rests are free of formaldehydes and carcinogens. Can be cleaned and sanitized. Entire palmrest can be removed for thorough cleaning of the platform • Installer friendly — ship standard with double-sided tape to assist with installation • Track can be cut in the field to shorten track depth — may affect ability to fully recess platform	• Track can be cut in the field to shorten track depth — may affect ability to fully recess platform	• Leatherette-covered palm rests are free of formaldehydes and carcinogens. Can be cleaned and sanitized. Entire palmrest can be removed for thorough cleaning of the platform • Installer friendly — ship standard with double-sided tape to assist with installation • Track can be cut in the field to shorten track depth — may affect ability to fully recess platform

AKM5 Keyboard Support w/Switch-n-Click Mousepad (page 116)

- Convenient lift and lock mechanism provides 8 $\frac{3}{8}$ " of height adjustment and offers more precise placement accommodated with visual dial-a-tilt height and tilt gauge.
- +10°/-15° tilt adjustment and 360° rotation provides support of neutral position of shoulders, arms, and wrists while accommodating multiple working postures.
- Slim, low-profile design.
- Pairs with a convertible keyboard platform that can be positioned in-line, over, or forward of keyboard platform — without the need for tools.
- Includes detachable leatherette-covered gel palm rest, nonslip pad, mouse pad, mouse guard, and cord management clips.
- Phenolic material on keyboard platform can be cleaned and sanitized to maintain a bacteria-free environment; articulating arm made of cold-rolled steel is recyclable.
- Recommended for straight-edge worksurfaces.

AKM3 Keyboard Support w/Switch-n-Click Mousepad (page 116)

- Features intuitive lift and lock height and tilt mechanism. Provides 7" of height adjustment.
- Slim, low-profile design that can be positioned flush with the worksurface for an extended workspace.
- +15°/-15° tilt adjustment and 360° rotation provides support of neutral position of shoulders, arms, and wrists while accommodating multiple working postures.
- Pairs with a convertible keyboard platform that can be positioned in-line, over, or forward of keyboard platform — without the need for tools.
- Includes detachable leatherette-covered gel palm rest, nonslip pad, mouse pad, mouse guard, and cord management clips.
- Phenolic material on keyboard platform can be cleaned and sanitized to maintain a bacteria-free environment; articulating arm made of cold-rolled steel is recyclable.
- Recommended for straight-edge worksurfaces.

AKMX Cobra™ Keyboard Support w/Mousepad (page 116)

- Lift and lock intuitive height adjustment.
- Positive and negative tilt for the best ergonomic positioning.
- +10°/-20° tilt adjustment and 360° rotation provides support of neutral position of shoulders, arms, and wrists while accommodating multiple working postures.
- Non-handed mouse tray can be moved from right hand to left hand side.
- Surpasses ANSI/BIFMA standards.
- Black powder-coat finish.

AKM1 Keyboard Support w/Mousepad (page 116)


- Simple, spring-assisted mechanism provides 6 $\frac{1}{4}$ " of height adjustment.
- Features soft-touch knob for simultaneous height and tilt adjustments.
- +10°/-15° tilt adjustment and 360° rotation provides support of neutral position of shoulders, arms, and wrists while accommodating multiple working postures.
- Accommodates keyboard and mouse on the same level
- Includes detachable leatherette-covered gel palm rest, nonslip pad, mouse pad, mouse guard, and cord management clips.
- Keyboard platform made of 90% post-consumer recycled materials and completely recyclable. Free of formaldehydes and carcinogens and emits no VOCs.

Keyboard Spacer Kit (page 116)

- Kit provides ten 2 $\frac{1}{8}$ "H spacers and hardware for mounting keyboard support beneath an external worksurface support channel.


CPU Hammock™ (page 116)





- Features 360° swivel with 13 $\frac{1}{2}$ " ball bearing glide track.
- Load capacity 55 lbs.
- Fits CPUs 5" to 20" in overall height and 3" to 6" in width.
- Height adjustable from 16" to 23" below worksurface.
- No tools required to make adjustments.
- Features a textured, silver paint finish.



Metal Corner Sleeves (page 116)

- 22 $\frac{1}{2}$ "W leading edge x 18"D.
- Corner sleeves connect intersecting worksurfaces to create "corner desk" work areas.
- All corner sleeves have pre-drilled holes to allow attachment of articulating keyboard platforms.



MONITOR ARMS	ZW8 for Tool Tile	ZW8 Single	ZW8 Dual	ZW8 Single-HD	ZW8 Dual-HD
Allsteel Model:	ZW810T	ZW810S	ZW820D	ZW810H	ZW820DH
					
Features:					
Monitor rotation	180°	180°	180°	180°	180°
Monitor Extension	15"	21"	21"	22¼"	26¼"
Monitor retraction	3½"	3½"	3½"	3½"	3½"
Monitor tilt adjustment	+30°/-25°	+30°/-25°	+30°/-25°	+85°/-25°	+35°/-25°
Arm Height adjustment	11¼"	6½" to 19½" (13")	6½" to 19½" (13")	9" to 23" (14")	9" to 23" (14")
Monitor Weight capacity (maximum approved weight)	6½ to 16 lbs.	6½ to 18 lbs.	6½ to 18 lbs. per arm	17½ to 44 lbs.	12 to 38.5 lbs. each
Mounting option	Stride rail mount*	Desk clamp or grommet included	Desk clamp or grommet included	Desk clamp or grommet included	Desk clamp or grommet included
360° lockout feature	No	Yes	Yes	No	No
VESA compatibility	75mm and 100mm	75mm and 100mm	75mm and 100mm	75mm and 100mm	75mm and 100mm
Laptop Tray compatible	Yes	Yes	Yes	No	No
Tool Tile / Stride Bench compatible	Yes	No	No	No	No
Pole height	N/A	N/A	N/A	N/A	N/A
Maximum width per monitor	N/A	N/A	25" **	25"	25"
Worksurface requirements — Desk Clamp	N/A	¾" to 2" thick	¾" to 2" thick	¾" to 2" thick	¾" to 2" thick
Worksurface requirements — Grommet Mount	N/A	¾" to 2" thick; hole diameter ⅝" to 2"	¾" to 2" thick; hole diameter ⅝" to 2"	¾" to 2" thick; hole diameter ⅝" to 2"	¾" to 2" thick; hole diameter ⅝" to 2"
Environmental info	99% Recycled content	99% Recycled content	99% Recycled content	99% Recycled content	99% Recycled content

*ZW810T is NOT approved for Tool Rail Models EASRxx or EAHSRxx that attach to system panel slots or hutches.


**Width of monitors can be extended with ZW8SM sliding mount.

ZW8 Series Monitor Arms (page 117)

- Versatile adjustability with a refined design and effortless, pneumatic fingertip adjustment.
- Multiple points of adjustment, including 360° swivel at two points, 21" extension and 13" of height adjustment, and a 180° lockout feature.
- Monitor tilts +30°/-25°.
- Tension adjustment feature at two locations to accommodate monitor weight and desired tilt tension.
- Maximize use of worksurface with ability to retract to minimal footprint of 3½", making ZW8 ideal for shallow worksurfaces.
- Model includes grommet and worksurface mounting options.
- Integrated cable management.
- Desk clamp mounts to surfaces ⅞" to 2" thick; grommet mount requires hole diameter of ⅝" to 2" wide, and accommodates surfaces up to 2" thick.
- Single arm supports 6½ to 18 lbs.; dual arm offers perfect horizontal alignment, and each arm supports 6½ to 18 lbs.
- ZW8 for tool tile is compatible on Allsteel tool tiles and Stride bench rail includes one dynamic extension limb. Arm extension is 15" from tile/rail, height adjustment 12".
(Not approved for tool rail models EASRxx or EAHSRxx that attach to system panel vertical slots or hitches.)
- ZW810S and ZW820D will fit all depths of Stride double-sided benches. Interference with support beam on 54" bench, desk clamp will not install flush to edge of worksurface, but will allow power access door to close completely.
- Mounting location on Stride single-sided bench and screen-based bench may be impacted by location of connecting brackets and supports.
- VESA 75mm and VESA 100mm compatible.
- Quick release feature simplifies monitor installation and exchanges.

ZW8SM Sliding Mount (page 117)

- Provides 9" of additional horizontal adjustability when attached to ZW810S or ZW820D above.
- Not compatible with Heavy Duty Series.
- 12¼"W x 2¾"H x 5½"D; 2 lbs.




ZW8 Heavy Duty Series (page 117)

- ZW810H heavy duty arm supports 7.6 to 44 lbs. in total weight.
- ZW820DH supports weight capacity 12 to 38.5 lbs. combined (to accommodate 5.5 lbs. weight of crossbar).
- Single arm features 22¼" extension, dual arm extends 26¾".
- Height adjustment range of 9" to 23" (14" total).
- Features 360° rotation at 3 points.
- Integrated cable management.
- Tension adjustment feature at two locations to accommodate monitor weight and desired tilt tension.
- Quick release feature simplifies monitor installation and exchanges.
- Monitor rotates 180° and tilts +85°/-35°.
- Dual arm crossbar length of 41"; monitors can be positioned by sliding along crossbar to accommodate various sizes. Can accommodate up to two 24" diagonal monitors (total outside casing dimension of 38" wide).
- Cannot be installed on 54" Stride double-sided bench due to interference with support beam.
- Mounting location on Stride single-sided bench and screen-based bench may be impacted by location of connecting brackets and supports.

Laptop Tray (page 117)

- Adjustable laptop tray can be used on ZW810S and ZW820D.
- Features adjustable depth of 11¼" to 17¼" to accommodate docking stations along with laptop computer.
- Width 12".
- Designed with ventilation holes for adequate heat dissipation.
- Non-skid protective pads included to prevent laptop from sliding.
- Weight of laptop tray 7 lbs; include when calculating total weight of tray + laptop to comply with weight capacity.










Extensions™

Ergonomics — Keyboard Supports / CPU Holder

For specification information see pages 110-111.

GSA SIN 711-1



Description	Model	List Price
Precision Fit Articulating Keyboard Support with Switch-n-Click Mousepad (Black only)		
18¾"W x 11½"D (Mounting clearance 21¾"D)	AKM5	\$ 600
Convertible Articulating Keyboard Support with Switch-n-Click Mousepad (Black only)		
18¾"W x 11½"D (Mounting clearance 21"D)	AKM3	\$ 522
Cobra™ Keyboard and Mouse Support (Black only)		
19"W x 11"D (Mounting clearance 23"D)	AKMX	\$ 471
Articulating Keyboard Support with Integrated Mousepad (Black only)		
25"W x 10½"D (Mounting clearance 17"D)	AKM1	\$ 344
Keyboard Spacer Kit		
10 – 2½"H Spacers and Hardware	AKMH	\$ 39
CPU Hammock™ (Silver only)		
Adjustable Height CPU Holder with 360° swivel	ACPU4	\$ 205
Metal Corner Sleeve — for use with Optimize™, Concensys®, Terrace®, and Stride® Systems		
• Fits 1¼" thick square edge detail. (T-Mold worksurfaces) 22½"W leading edge x 18"D.	AWCS	\$ 94

All Extensions models are available in the **Everyday Advantage®** program, see page 9 for details.


How to specify — Select the Model Number from above.	1st Option: Paint for Corner Sleeve: See inside front cover for finishes.

Examples: AKMX AKM1 ACPU4 AWCS.P4J

Shippable by small-package carrier.

For specification information see pages 112-113.

GSA SIN 711-1

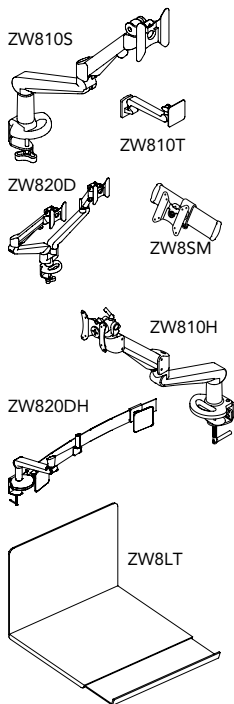

Description	Model		List Price
Monitor Arms — ZW8 Series			
Single — Desk Clamp	ZW810S		\$ 412
Single — Mounts to Toolrail or Tool Tile	ZW810T		\$ 412
Dual — Desk Clamp	ZW820D		\$ 706
Conversion Kit — from Single-to-Dual	ZW82KIT		\$ 412
Sliding Mount for Monitor Arm	ZW8SM		\$ 145
Single Monitor — for Heavy Duty Monitor	ZW810H		\$ 626
Dual Monitor — for Heavy Duty Monitors	ZW820DH		\$ 1075
Laptop Tray	ZW8LT		\$ 263

All Extensions models are available in the **Everyday Advantage®** program, see page 9 for details.

How to specify — Select the Model Number from above.	1st Option: Color for ZW Series: SVR Silver
---	--

ZW8 | | | | . S | V | R |


Examples: ZW810S.SVR ZW8LT.SVR

Shippable by small-package carrier.

Allsteel Extensions offers Illumination in four styles — Task Light, Undercabinet LED Light, Wand Light, and Link Light.

Task Light


Recessed task lights conserve space and provide an efficient solution for illuminating the workplace. All models are equipped with electronic ballast for longer bulb life and cooler operating temperature.



Recessed task light models mount under storage cabinets or shelves to provide optimal space utilization. Models are available in two styles and three sizes to correspond with the width of the cabinet or shelf. Task lights with a fused plug are available to meet Chicago electrical code.

Undercabinet LED Light


The Undercabinet LED Light is a low-profile, linear solution for overhead cabinets and shelves and is an ideal solution for painted wood storage. It utilizes energy-efficient LED technology which provides a long life. The Undercabinet LED Light provides the opportunity to mount the fixture where light is needed most.



The Undercabinet LED Light features a metal trough reflector with diffuser lens. The light has a sleek ½" thick profile and provides two options for mounting, either magnetically or with hardware. Undercabinet LED Lights can be daisy-chained.

Optional undercabinet occupancy sensor is available which will automatically turn off the fixture after 30 minutes of no detection and back on immediately as the user re-enters the detection range using Passive Infrared (PIR) sensor technology. Unit features 360° lens with 90° outward detection angle, providing a 36" coverage diameter at 18". Occupancy sensor comes with connector and is required to be connected in the sequence shown below. Connect occupancy sensor to a light, or first light in daisy chain to control all linked lights.

CONNECTION SEQUENCE*



*Cannot deviate from this sequence

Recessed Task Lights (page 120)

- Recessed task lights are black with a 9' long black cord that is attached to the right rear corner of the fixture. (Color does not need to be specified.)
- Bulbs are included.
- RECOMMENDATION: Provide a separate circuit for task lights to ensure proper, long-term operation.
- Includes 4 cord retainer clips.
- Shorter width models can be used on wider overheads, shelves and hutches.
- All models are equipped with electronic ballast for longer bulb life and cooler operating temperature.
- On/Off switch provides individual control of tasklight within the workstation.
- Daisy chain models require a master control model — 10 fixtures maximum.

Undercabinet LED Lights (page 121)

- Low profile energy-efficient LED task light for use with overhead storage cabinets and shelves.
- 20W power supply for 10W 17" unit (.166 amps).
- 20W power supply for 20W 31" unit (.166 amps).
- 60W power supply for daisy-chain starter units (.5 amps). Must order one starter unit for each daisy-chain application.
- Specify up to 5 additional 17" interconnect units (ALED17UJMP30) to daisy-chain together with 17" daisy-chain starter fixture (ALED17U60).

Example: Daisy-chain 4–17" undercabinet LED lights:


Specify: 1 ALED17U60

Specify: 3 ALED17UJMP30 with 10" jumper cord

- Specify up to 2 additional 31" interconnect units (ALED31UJMP30) with 10" jumper cords to daisy-chain together with 31" tasklight (ALED31U60); or 17" daisy-chain starter fixture (ALED17U60).
- 3500K color temperature.
- 131 footcandles at 18" on ALED31U; 76 footcandles at 18" on ALED17U.
- Magnetic or screw-mount option — attachment hardware included.
- On 20 watt models, power drive is attached to plug; allow 1½"D space at outlet.
- On 60 watt models, power drive brick is in center of cord and can be attached to underside of worksurface with velcro mount.
- Includes 3 cord retainer clips.
- Meets California Title 24 Energy Efficiency Standards.
- "Instant On" switch with infinite dimming cycle from 100% to 15% with the last state memory, allowing the user to set their desired level of lighting.
- Fixture automatically turns off after 10 hours of use to reduce unwanted energy use.
- Optional occupancy sensor automatically turns off all interlinked fixtures after 30 minutes of no detection and back on immediately when detection is found.

Link™ Light

Link's simple forms, slim profile, and expressive details make a surprising design statement in any workplace. The playful lamp head offers 180-degree movement for natural and precise adjustability. The concentrated array of high-power LEDs delivers a brighter light output than standard fluorescent lights, while operating cooler for consistent, long-lasting, and uniform-quality light. Plus, its efficient design elegantly conserves the amount of materials required, paring them down to their most essential. Engineered for effortless disassembly, Link is 97 percent recyclable.




Link Light (page 121)

- Single- or dual-arm style.
- 3300K color temperature, 7.5 watts.
- Available in two soft-touch colors (Silver and Black).
- Mounting options include a freestanding base, worksurface edge clamp, or tool rail bracket. Each allows for unobstructed lamp rotation.
- Freestanding base is 9½" x 9½".
- Cord length: 9' with detachable power adapter.
- The lamp head forms the handle, offering 180-degree up/down movement.
- Low Profile worksurface clamp allows for minimal clearance conditions but must be installed before worksurface.
- Power is delivered through a conductive aluminum skin, eliminating internal wiring.
- L-shaped base sits in the corner, using minimal workspace.
- Meets California Title 24 Energy Efficiency Standards.
- Link Light is UL, CE, and RoHS compliant.
- Actual length of model LED18U is 19".
- Actual length of model LED36U is 37¼".

Wand™ Task Light

Wand freestanding task light offers a clean, simple design along with powerful LED technology to illuminate the workspace. The swivel base and arm tilt allow users to position the light just where they need it. The 7.7 watt LED light offers efficiency and long life, providing up to 25 years of daily use. The slim, sleek design makes it easy to integrate into any workspace. Wand task light is 97% recyclable. Optional Occupancy Sensor available.



Wand LED Freestanding Task Light (page 121)

- Available in Silver or White. 9'4" cord is Silver.
- Full range dimming from 100% — 10% with last state memory.
- More efficient than original Wand light with brighter and broader range of light.
- Uses 7.7 watts at highest setting and as low as 1 watt at its lowest setting, providing 85 to 12 footcandles of light, respectively (16" above worksurface).
- 7½" round swivel base and 16½"H tilt arm allow versatile positioning of the 13" lampshade.
- Designed for 50,000 hours of life, providing up to 25 years of daily use. Warranty — 5 years (fixture); 3 years (power supply).
- Color Temperature: 3500K. Color Rendering Index (CRI): 80.
- Materials: aluminum arm and lampshade, steel base.
- Weight: 4.4 lbs. 97% recyclable, 76% post-consumer.
- Certifications: UL and CUL. TAA compliant.
- Occupancy sensor available with automatic shut-off after 6 minutes if no motion is detected.

For specification information see page 118.

Open Market / GSA SIN 711-1 (as noted)



Open Market

Description	Watt Usage	Model	List Price
T5 Task Lights (Black only) — Use recessed under overhead cabinets, storage shelves, or hutches, comes with cord retainer clips			
Task Light for 24"W	10	A870824 	\$ 258
Task Light for 30"W and 36"W	14	A870830 	\$ 261
Task Light for 42"W and 48"W	21	A870842 	\$ 282
Task Light for 60"W, 66"W, and 72"W	28	A870860 	\$ 305

Task Lights (Black only) — With fused plug (satisfies Chicago electrical code)

Task Light for 24"W	10	A870824CH	<u>S</u>	\$ 333
Task Light for 30"W and 36"W	14	A870830CH	<u>S</u>	\$ 340
Task Light for 42"W and 48"W	21	A870842CH	<u>S</u>	\$ 360
Task Light for 60"W, 66"W, and 72"W	28	A870860CH	<u>S</u>	\$ 381

Note: See below for GSA Approved Task Lights.



GSA SIN 711-1

T8 Energy Efficient Tri-Phosphor Task Lights — Use recessed under overhead cabinets, storage shelves, or hutches

Base Models — Stand Alone

Task Light for 24"W	15	GS870924	\$	\$ 333
Task Light for 30"W and 36"W	17	GS870930	\$	\$ 346
Task Light for 42"W and 48"W	25	GS870948	\$	\$ 370
Task Light for 60"W, 66"W, and 72"W	32	GS870960	\$	\$ 396

Master Control Models with Power Unit for Daisy Chain (10 fixtures maximum)

Master Task Light for 24" W	GS870924MCL		\$ 371
Master Task Light for 30" W and 36" W	GS870930MCL		\$ 382
Master Task Light for 42" W and 48" W	GS870948MCL		\$ 409
Master Task Light for 60" W, 66" W, and 72" W	GS870960MCL		\$ 432

Jumper Models with 42" Daisy Chain Jumper Cord (require a Master Control model)

Jumper Task Light for 24"W	GS870924D	<u>S</u>	\$ 333
Jumper Task Light for 30"W and 36"W	GS870930D	<u>S</u>	\$ 346
Jumper Task Light for 42"W and 48"W	GS870948D	<u>S</u>	\$ 370
Jumper Task Light for 60"W, 66"W, and 72"W	GS870960D	<u>S</u>	\$ 396

Note: All T5 and T8 task lights above are 4100 Kelvin.



GSA SIN 711-1

Cord Retainer Clips (Black only)

Bag of 50 clips	AAPACM2	\$	35
-----------------	---------	----	----

E All Extensions models are available in the **Everyday Advantage®** program, see page 9 for details.


<i>How to specify —</i> Select the Model Number from above.	<i>1st Option:</i> Cord Retainer Clip Color: Black only.
---	--

Examples: A870824 A870824CH GS870924 GS870960MCL
AAPACM2.P27

S *Shippable by small-package carrier.*

For specification information see pages 118-119.


Open Market / GSA SIN 711-1



GSA 711-1


Description	Model	List Price
LED Undercabinet Light (Anodized aluminum only with white end caps)		
17" Task Light w/20 watt power supply for 24"W or wider overhead	ALED17U ☐	\$ 633
17" Task Light w/60 watt power supply for daisy chain	ALED17U60 ☐	\$ 691
17" 10 watt Interconnect Task Light w/10" Jumper Cord	ALED17UJMP30 ☐	\$ 488
31" Task Light w/20 watt power supply 36"W or wider overhead	ALED31U ☐	\$ 948
31" Task Light w/60 watt power supply for daisy chain	ALED31U60 ☐	\$ 999
31" 20 watt Interconnect Task Light w/10" Jumper Cord	ALED31UJMP30 ☐	\$ 570
Undercabinet Occupancy Sensor 2¼"W + 1"W Connector	ALEDOCC* ☐	\$ 386

*Undercabinet Occupancy Sensor works with LED Undercabinet lights shipped after 11/1/2013.



Open Market

Link™ LED Light		
Link LED Lamp, 18" Single Arm	LNKSA ☐	\$ 483
Link LED Lamp, 13"/13" Dual Arm	LNKDA ☐ (shown)	\$ 513
Link Freestanding Base	LNKFS ☐	\$ 127
Link Low Profile Worksurface Clamp	LNKCL ☐	\$ 78
Link Tool Tile Attachment	LNKPM ☐	\$ 78



GSA 711-1

Wand™ LED Task Light (Silver or White)		
Freestanding LED Task Light w/base	WANDFS ☐	\$ 309
Freestanding LED Task Light w/base and Occupancy Sensor	WANDFSOC ☐	\$ 438

E All Extensions models are available in the **Everyday Advantage®** program, see page 9 for details.

How to specify — Select the Model Number from above.	1st Option: Color (for Link Light): SVR Silver (for Wand LED): SVR Silver WHT White
---	--

Examples: ALED17U LNKDA.SVR WANDFS.WHT

☐ Shippable by small-package carrier.

Appendix

Locking Specifications

GSA Reference Page

Laterals, Pedestals and Storage, Painted Wood Storage

Standard Options

- Random Keying — The factory will assign key(s) arbitrarily using key numbers from chart below.
- Omit Lock Core — The factory will omit lock cores. Removable lock core kits with specific key number must be ordered to facilitate keying alike in the field.

Replacing Lock Cores

- Lock must be in the unlocked position.
- Insert core removal key and pull core straight out.
(Reach units require rotating key 90° clockwise past unlocked position.)
- Insert new core with core removable key, hold core into lock and withdraw core removal key.
- Retain original core for future use.

Vertical Files

Standard Options


- Random Keying — The factory will assign key(s) arbitrarily (see below chart for key numbers).

Key Alike Process

- Order standard product which will be shipped with factory installed locks and random numbered cores.
- Order the appropriate quantity of like numbered cores required for each workstation or keyed area.
- Simply replace the factory installed core with the replacement cores after product has been installed.

	Random Keying	Omit Lock Core	Key Numbers	Lock Core Kit	Master Key
Align™ Laterals	X	X	101E-225E	ALKF23C*	AMKF22
Align New Low Credenzas, Towers, Pedestals (“YP” prefix models)	X	X	101E-225E	ALKF26EL	AMKF22
Align Old Pedestals (for New Pedestals after 11/2015 see above)	X	X	101E-225E	ALKF23C*	AMKF22
Align Old Towers (for New Towers after 2/2016 see above)	X	X	101E-225E	ALKF23C*	AMKF22
Align Metal Front Lockers	X	X	101E-225E	ALKF26EL	AMKF22
Align Laminate Front Lockers	X	X	101E-225E	ALKF23C*	AMKF22
Approach™ Desking and Storage	X	X	101E-225E	ALKF26EL	AMKF22
Center Drawer (CSDC19/25)	X	X	101E-225E	ALKF23C*	AMKF22
Essentials™ Laterals	X	X	101E-225E	ALKF23C	AMKF22
Essentials Overfile Cabinets	X	X	101E-225E	ALKF23C*	AMKF22
Essentials Pedestals	X	X	101E-225E	ALKF23C*	AMKF22
Essentials Personal Tower and Files	X	X	101E-225E	ALKF23C*	AMKF22
Further™ Laminate Storage	X	X	101E-225E	ALKF23C*	AMKF22
Hutches	X	X	101E-225E	ALKF23C*	AMKF22
Involve® Laminate Storage	X	X	101E-225E	ALKF23C*	AMKF22
Overheads (Flipper Door, including RTA)	X	X	101E-225E	ALKF23C*	AMKF22
Overheads (Receding Door)	X	X	101E-225E	ALKF23C*	AMKF22
Stride® Painted Wood Storage	X	X	101E-225E	ALKF23C*	AMKF22
Vertical Files A990/A940	X		101E-225E	ALKF23C*	AMKF22

*ALKF23C is chrome. Optional black core for wood casegoods is ALKF23CE4. Optional matte silver core is ALKF26EL.




Description	Model	List Price
Removable Lock Core Kits	Key Numbers 101E-225E	
Brushed Chrome used on metal and painted wood caseloads product produced after 2/3/97; A980, A990, and A940 Series vertical files; Persona™ pedestals produced after 8/22/09; Reach® Storage units produced after 10/5/09; and receding door overheads produced after 8/1/10. Includes one core, two keys, one core removal tool, adapter and instructions	ALKF23C 	\$ 18
Black used on veneer caseloads product. Includes one core, two keys, one core removal tool, adapter and instructions. Core matches manufactured lock on metal caseloads but Black core can be used with veneer and laminate product.	ALKF23CE4 	\$ 18
Matte Silver used on Approach and Align metal credenzas, new pedestals, and new towers. Includes one core, two keys, one core removal tool, adapter, and instructions.	ALKF26EL 	\$ 18
Master Key (One key) Available to authorized dealers only on faxed orders. Will open ALKF23C, LKF23C, ALKF23CE4, LKF23CE4, LKF24, LKF25EL, and LKF25E4 locks numbered 101E-225E.		
	AMKF22 	\$ 19

HOW TO ORDER:

Note: Numbers 101E-225E are available. Orders without numbers specified will be keyed at random.

SAMPLE ORDER:

Quantity	Model	Color
6	ALKF23C	X121E
1	AMKF22	X



Brushed Chrome Removable Lock Core Kit*	Key Numbers 101N-225N	
Includes one core, two keys, one core removal tool, adapter, and instructions	ALKF23CN 	\$ 18



Master Key*		
(One key) Available to authorized dealers only on electronic orders. Will open ALKF23CN and LKF23CN locks numbered 101N-225N.	AMF22 	\$ 19

*On existing Premium and Asset lateral, use N-Series locks.

 Shippable by small-package carrier.

allsteeloffice.com | 123

Appendix

Locking Specifications — Easy Lock Program

GSA SIN 711-1

EASY LOCK PROGRAM

The Allsteel Easy Lock Program simplifies the lock-core ordering process when multiple cores are being specified. The Easy Lock cores can be used with Allsteel storage that currently uses the **ALKF23C** cores (all storage except Receding Door Overheads).

To ensure ease of ordering in different situations the Easy Lock cores can be specified in three different ways — Random, Specified or Sequential.

Random Keying

The Random Keying option is provided for instances where there are multiple orders or phases to a project and the offices need to be keyed alike but the key numbering is not required. With the random keying option key numbers are not specified, however, the core kits will be in sequential order from a random starting point.

Example: There are 15 offices which each have 5 black locks that need to be keyed alike, but the actual key numbers are not important.

This order would look like: **LKFE5BLK.X.15**

This specifies that 15 5-core kits are needed in black with random key numbers.

Specified Keying

The Specified Keying option is provided for the instances where there is a specific key number desired for all of the cores ordered.

Example: There are 10 offices which each have 2 silver locks that need to be keyed-alike with key number 202.

This order would look like: **LKFE2SLV.X202.10**

This specifies that 10 2-core kits are needed in silver with key number 202.

Sequential Keying

Allsteel Sequential Keying option is provided for the instances when there are multiple orders or phases to a project and it is imperative that key numbers are not duplicated.

Example: A multiple phase project has 60 total offices — 40 offices in Phase I, and 20 offices in Phase II. The project manager has expressed a need to have keyed-alike offices but doesn't want any of the offices to use the same key numbers.

The first 40 offices have 4 silver locks each that need to be keyed-alike.

This order would look like: **LKFE4SLV.SEQ/101.40**

This specifies that 40 4-core kits are needed in silver and the starting number is 101.

The second set of 20 offices only have 3 silver locks each that need to be keyed-alike; and it is important which key number starts off the sequence to ensure that no key number is duplicated. It is known that the first key range was key numbers 101-140.

The second order would look like: **LKFE3SLV.SEQ/141.20**

This specifies that 20 3-core kits are needed in silver and key sequence has to start at key number 141.

HOW TO ORDER:

Numbers 101-225 are available. Orders without key numbers specified will be keyed at random.

SAMPLE ORDER FOR EXAMPLES GIVEN:

Model	Key Type	Quantity
LKFE5BLK.	X.	15
LKFE2SLV.	X202.	10
LKFE4SLV.	SEQ/101.	40
LKFE3SLV.	SEQ/141.	20

NOTE: Quantity required is last number in model.option string.


Description	Model / Color	List Price
Easy Lock Lock-Core		
Lock Core Kit — 1 core, 2 keys	LKFE1	\$ 18
Lock Core Kit — 2 cores, 2 keys	LKFE2	\$ 36
Lock Core Kit — 3 cores, 2 keys	LKFE3	\$ 54
Lock Core Kit — 4 cores, 2 keys	LKFE4	\$ 72
Lock Core Kit — 5 cores, 2 keys	LKFE5	\$ 90
Lock Core Kit — 6 cores, 2 keys	LKFE6	\$108
Lock Core Kit — 7 cores, 2 keys	LKFE7	\$126
Lock Core Kit — 8 cores, 2 keys	LKFE8	\$144
Add color suffix to model: SLV Silver, BLK Black, MTS Matte Silver		
Note: One core removal key minimum per order. One additional core removal key per 25 lock-cores will be shipped.		

Master Key

(One key) Available to authorized dealers only on faxed orders.	AMKF22	\$ 19
---	--------	-------


How to specify using Easy Lock Program:

Step 1 — Count the number of lock cores and color required in each workstation that need to be keyed alike.




2 overheads with 1 lock-core each = 2
2 pedestals with 1 lock-core each = 2
Total silver lock-cores per station = 4

Step 2 — Count the total number of workstations needing 4 lock-cores.



4 total workstations

Step 3 — Specify model number based on total number of lock-cores in a station and quantity of kits based on number of workstations.




LKFE4SLV.X.4

Lock-Cores per station
Color of Core
Number of workstations

Appendix

16x20 Sample Yardage and Touch-Up Paint


GSA SIN 711-18 for SYSTG; others 711-1



GSA SIN 711-18

Model	List Price by Grade					
	1	2	3	4	5	6
Seating Upholstery Sample — 16"H x 20"W						
SYSTG [S]	\$ 120	\$ 135	\$ 143	\$ 150	\$ 163	N/A
	7	8	9	10	Leather 1	Leather 2
	\$ 180	\$ 192	\$ 201	\$ 211	\$ 242	N/A
					N/A	\$ 233

- Samples have sewn edges, a grommet, and label.



Model	List Price by Grade					
	A	B	C	D	E	F
Systems Fabric Sample — 16"H x 20"W						
SYSFS [S]	\$ 96	\$ 105	\$ 110	\$ 120	N/A	N/A

- Samples have sewn edges, a grommet, and label.

How to specify —
Select the
Model Number
from above.

1st Option:

Fabric
(applicable only to
individual samples):
See inside back cover
for fabrics.

S Y | | | | | | | .

| | | | | | |

Examples: SYSFS.APN911 SYSTG.CU47

Description	Model	P1 List Price	P2 List Price
Touch-Up Paint — Brush			
Bottle of Touch-Up Paint with Brush — 0.5 oz.	APTK [S]	\$ 64	\$ 73
Touch-Up Paint — Spray			
Spray Can of Touch-Up Paint — 12 oz.	ARSLCC [S]	\$ 64	\$ 73

P1 Paint Colors	Code	P2 Paint Colors	Code
Black	P27	Brilliant White.....	PQ8
Brownstone	P7D	Carbon Metallic (<i>Spray Only</i>).....	P4Q
Bungalow	P7C	Champagne Metallic	PR5
Carob	P52	Gunmetal Metallic	PR3
Flint	P02	Platinum Metallic.....	PR2
Fossil	P28	Silver	PR6
Loft	P7B	Tungsten	PR1
Muslin.....	P4J		
Parchment	P93		

How to specify —
Select the
Model Number
from above.

1st Option:

Paint Color:

P1 P2

See available Touch-Up Paint colors
listed above. Carbon Metallic is limited
to spray.

A | | | | | | | .

| | | | | | |

Examples: APTK.P02 ARSLCC.P02

[S] Shippable by small-package carrier.

Cross Reference Index

by Model Number

Model	Page	Model	Page	Model	Page	Model	Page	Model	Page
2282-300	93	A871160A	32	AKM5	116	CS604	69	ELF242NS	96
2282-400	93	A871172	32	AKMH	116	CS609	69	ELF330NA	96
802424M	61	A871172A	32	AKMX	116	CS664	69	ELF330NB	96
803030M	61	A871196	32	ALED17U	121	CS669	69	ELF330NI	96
831124	68	A871196A	32	ALED17U60	121	CS724	69	ELF330NS	96
831130	68	A871224	32	ALED17UJMP30	121	CS729	69	ELF336NA	96
831212M	57	A871224A	32	ALED31U	121	CSCMP3614	69	ELF336NB	96
832407M	61	A871230	32	ALED31U60	121	CSCMP3629	69	ELF336NI	96
833007M	61	A871230A	32	ALED31UJMP30	121	CSCMP4214	69	ELF336NS	96
851524M	62	A871236	32	ALEDOCC	121	CSCMP4229	69	ELF342NA	96
851530M	62	A871236A	32	ALKF23C	123	CSCMP4814	69	ELF342NB	96
851536M	62	A871242	32	ALKF23CE4	123	CSCMP4829	69	ELF342NI	96
851542M	62	A871242A	32	ALKF23CN	123	CSCMP6014	69	ELF342NS	96
851548M	62	A871248	32	ALKF26EL	123	CSCMP6029	69	ELF430NA	96
851554M	62	A871248A	32	AM387-203A	92	CSCMP7214	69	ELF430NB	96
851560M	62	A871260	32	AM387-203B	92	CSCMP7229	69	ELF430NI	96
851566M	62	A871260A	32	AM387-203I	92	CSDC19	109	ELF430NS	96
851572M	62	A871272	32	AM387-203S	92	CSDC25	109	ELF430PA	96
852424M	62	A871272A	32	AM387-233A	92	CSL2429F	68	ELF430PB	96
853030M	62	A871400	33	AM387-233B	92	CSL3029F	68	ELF430PI	96
853636M	62	A871400A	33	AM387-233I	92	EAAC	108	ELF430PS	96
854242M	62	A871500	33	AM387-233S	92	EABE	108	ELF436NA	96
860536M	58	A871501	33	AM388-202A	92	EABS	108	ELF436NB	96
860542M	58	A871501A	33	AM388-202B	92	EADH	108	ELF436NI	96
860548M	58	A871502	33	AM388-202I	92	EAFS	108	ELF436NS	96
899900	21	A871502A	33	AM388-202S	92	EAFI	108	ELF436PA	96
899910	21	A871503	33	AM388-232A	92	EAHSR36	107	ELF436PB	96
9120 Program	64, 65	A871503A	33	AM388-232B	92	EAHSR42	107	ELF436PI	96
A2-8CIR24	32	A871504	33	AM388-232I	92	EAHSR48	107	ELF436PS	96
A2-8CIR30	32	A871506	33	AM388-232S	92	EAHSR60	107	ELF442NA	96
A2-8CIR36	32	A871601	33	AMF22	123	EAHSR66	107	ELF442NB	96
A2-8CIR42	32	A871601A	33	AMKF22	123, 124	EAHSR72	107	ELF442NI	96
A2-8CIR48	32	A871912	33	AMRK36	109	EAPC	108	ELF442NS	96
A2-8CIR60	32	A871912A	33	AMRK42	109	EAPS	108	ELF442PA	96
A2-8CIR72	32	A871918	33	AMRK48	109	EAPT	108	ELF442PB	96
A2280-000	93	A871918A	33	AP1050CST	93	EASR24	107	ELF442PI	96
A870070	33	A871972	33	AP20040AG	93	EASR30	107	ELF442PS	96
A870300	34	A871972A	33	AP519495	93	EASR36	107	ELF530NA	96
A870301	34	A879072	33	APFB80	93	EASR42	107	ELF530NB	96
A870302	109	A879072A	33	APMC6	108	EASR48	107	ELF530NI	96
A870824	120	A879168	33	APTK	125	EASR60	107	ELF530NS	96
A870824CH	120	A879168A	33	APWRMOD2UWM	109	EASS	108	ELF530PA	96
A870830	120	A87P2D1C	109	APWRMOD2WC	109	EATS	108	ELF530PB	96
A870830CH	120	A87P2D1R	109	APWRMOD3UWM	109	EBC230	99	ELF530PI	96
A870842	120	A87P2U1C	109	APWRMOD3WC	109	EBC236	99	ELF530PS	96
A870842CH	120	A87P2U1D1C	109	ARSLCC	125	EBC30	99	ELF536NA	96
A870860	120	A87P2U1R	109	ASC42	102	EBC330	99	ELF536NB	96
A870860CH	120	AAPACM2	34, 120	ASCHELF	102	EBC336	99	ELF536NI	96
A8710120	32	ACOMDOME2	109	ASPT-245C	93	EBC42	99	ELF536NS	96
A8710120A	32	ACPU4	116	ASPT-30SC	93	EBC430	99	ELF536PA	96
A8710144	32	AEV920	34	ATADF3	34	EBC436	99	ELF536PB	96
A8710144A	32	AF397-203A	92	ATADF4	34	EBC530	99	ELF536PI	96
A871024	32	AF397-203B	92	ATADJ5	34	EBC536	99	ELF536PS	96
A871024A	32	AF397-203I	92	ATADJ6	34	EBC60	99	ELF542NA	96
A871030	32	AF397-203S	92	AWCS	116	EBC72	99	ELF542NB	96
A871030A	32	AF397-233A	92	AYBHEP1229	67	EBC82	99	ELF542NI	96
A871036	32	AF397-233B	92	AYBHEP2429	67	ECF530HA	97	ELF542NS	96
A871036A	32	AF397-233I	92	AYBHEP3029	67	ECF530HB	97	ELF542PA	96
A871042	32	AF397-233S	92	CBK29	68	ECF530HI	97	ELF542PB	96
A871042A	32	AF398-202A	92	CBPLATE3-36	34	ECF530HS	97	ELF542PI	96
A871048	32	AF398-202B	92	CBPLATE3-42	34	ECF530NA	97	ELF542PS	96
A871048A	32	AF398-202I	92	CBPLATE3-48	34	ECF530NB	97	ELF830NA	96
A871060	32	AF398-202S	92	CBPLATE3-60	34	ECF530NI	97	ELF830NB	96
A871060A	32	AF398-232A	92	CDG	69	ECF530NS	97	ELF830NI	96
A871072	32	AF398-232B	92	CDL29	68	ECF536HA	97	ELF830NS	96
A871072A	32	AF398-232I	92	CEP1129F	68	ECF536HB	97	ELF836NA	96
A871096	32	AF398-232S	92	CEP2429F	68	ECF536HI	97	ELF836NB	96
A871096A	32	AFNLFTP-3018	100	CEP3029F	68	ECF536HS	97	ELF836NI	96
A8711120	32	AFNLFTP-3036	100	CMT24	34	ECF536NA	97	ELF836NS	96
A8711120A	32	AFNLFTP-3618	100	CMT36	34	ECF536NB	97	ELF842NA	96
A8711144	32	AFNLFTP-3636	100	CRK29	68	ECF536NI	97	ELF842NB	96
A8711144A	32	AFNLFTP-4218	100	CS244	69	ECF536NS	97	ELF842NI	96
A871124	32	AFNLFTP-4236	100	CS249	69	ELF230NA	96	ELF842NS	96
A871124A	32	AFNLFTP-6018	100	CS304	69	ELF230NB	96	EOF3018	97
A871130	32	AFNLFTP-6036	100	CS309	69	ELF230NI	96	EOF3618	97
A871130A	32	AFNLFTP-6618	100	CS364	69	ELF230NS	96	EOF4218	97
A871136	32	AFNLFTP-6636	100	CS369	69	ELF236NA	96	EPF23018BBFDA	94
A871136A	32	AFNLFTP-7218	100	CS424	69	ELF236NB	96	EPF23018BBFDB	94
A871142	32	AFNLFTP-7236	100	CS429	69	ELF236NI	96	EPF23018BBFDI	94
A871142A	32	AFNLFTP-8418	100	CS484	69	ELF236NS	96	EPF23018BBFDS	94
A871148	32	AFNLFTP-8436	100	CS489	69	ELF242NA	96	EPF23018DA	94
A871148A	32	AKM1	116	CS544	69	ELF242NB	96	EPF23018DB	94
A871160	32	AKM3	116	CS549	69	ELF242NI	96	EPF23018DBFA	94

Cross Reference Index

by Model Number

Model	Page	Model	Page	Model	Page	Model	Page	Model	Page
EPF23018DBBFB.....	94	ET42424ROFFB.....	95	P13530TP.....	18	P21572GS.....	21	P3CONX65.....	22
EPF23018DBBFI.....	94	ET42424ROFFI.....	95	P13536TP.....	18	P21572T.....	18	P3CONX72.....	22
EPF23018DBBFS.....	94	ET42424ROFFS.....	95	P13542TP.....	18	P23024G.....	20	P3CONX80.....	22
EPF23018DFFA.....	94	ET52424LBBFA.....	95	P13548TP.....	18	P23030G.....	20	P3VH07P.....	23
EPF23018DFFB.....	94	ET52424LBBFB.....	95	P13560TP.....	18	P23036G.....	20	P3VH15P.....	23
EPF23018DFFI.....	94	ET52424LBBFI.....	95	P13572TP.....	18	P23042G.....	20	P3VH22P.....	23
EPF23018DFFS.....	94	ET52424LBBFS.....	95	P14224TP.....	18	P23048G.....	20	P3VH30P.....	23
EPF23018DI.....	94	ET52424LFFA.....	95	P14230TP.....	18	P23060G.....	20	P48042DP.....	21
EPF23018DS.....	94	ET52424LFFB.....	95	P14236TP.....	18	P278PP.....	33	P51500.....	62
EPF23018FBLA.....	94	ET52424LFFI.....	95	P14242TP.....	18	P281520BBFA.....	92	P51500-42.....	62
EPF23018FBLB.....	94	ET52424LFFS.....	95	P14248TP.....	18	P281520BBFB.....	92	PD80.....	93
EPF23018FBLI.....	94	ET52424LOBBFA.....	95	P14260TP.....	18	P281520BBFI.....	92	PF197-183A.....	91
EPF23018FBLS.....	94	ET52424LOBBFB.....	95	P14272TP.....	18	P281520BBFS.....	92	PF197-183B.....	91
EPF23018FFDA.....	94	ET52424LOBBFI.....	95	P15024HP.....	20	P281520FFA.....	92	PF197-183I.....	91
EPF23018FFDB.....	94	ET52424LOBBFS.....	95	P15024TP.....	18	P281520FFB.....	92	PF197-183S.....	91
EPF23018FFDI.....	94	ET52424LOFFA.....	95	P15030HP.....	20	P281520FFI.....	92	PF197-233A.....	91
EPF23018FFDS.....	94	ET52424LOFFB.....	95	P15030TP.....	18	P281520FFS.....	92	PF197-233B.....	91
EPF23018SLFA.....	94	ET52424LOFFI.....	95	P15036HP.....	20	P281523BBFA.....	92	PF197-233I.....	91
EPF23018SLFB.....	94	ET52424LOFFS.....	95	P15036TP.....	18	P281523BBFB.....	92	PF197-233S.....	91
EPF23018SLFI.....	94	ET52424RBBFA.....	95	P15042HP.....	20	P281523BBFI.....	92	PF197-303A.....	91
EPF23018SO.....	94	ET52424RBBFB.....	95	P15042TP.....	18	P281523BBFS.....	92	PF197-303B.....	91
ESC230A.....	98	ET52424RBBFI.....	95	P15048HP.....	20	P281523FFA.....	92	PF197-303I.....	91
ESC230B.....	98	ET52424RBBFS.....	95	P15048TP.....	18	P281523FFB.....	92	PF197-303S.....	91
ESC230I.....	98	ET52424RFFA.....	95	P15060HP.....	20	P281523FFI.....	92	PF198-182A.....	91
ESC230S.....	98	ET52424RFFB.....	95	P15060TP.....	18	P281523FFS.....	92	PF198-182B.....	91
ESC236A.....	98	ET52424RFFI.....	95	P15072HP.....	20	P335PV.....	23	PF198-182I.....	91
ESC236B.....	98	ET52424RFFS.....	95	P15072TP.....	18	P335W.....	23	PF198-182S.....	91
ESC236I.....	98	ET52424ROBBFA.....	95	P16524HP.....	20	P342PV.....	23	PF198-232A.....	91
ESC236S.....	98	ET52424ROBBFB.....	95	P16524TP.....	18	P342W.....	23	PF198-232B.....	91
ESC330A.....	98	ET52424ROBBFI.....	95	P16530HP.....	20	P350PV.....	23	PF198-232I.....	91
ESC330B.....	98	ET52424ROBBFS.....	95	P16530TP.....	18	P350W.....	23	PF198-232S.....	91
ESC330I.....	98	ET52424ROFFA.....	95	P16536HP.....	20	P357PV.....	23	PF198-302A.....	91
ESC330S.....	98	ET52424ROFFB.....	95	P16536TP.....	18	P357W.....	23	PF198-302B.....	91
ESC336A.....	98	ET52424ROFFI.....	95	P16542HP.....	20	P365PV.....	23	PF198-302I.....	91
ESC336B.....	98	ET52424ROFFS.....	95	P16542TP.....	18	P365W.....	23	PF198-302S.....	91
ESC336I.....	98	ETB2W1.....	95	P16548HP.....	20	P372PV.....	23	PH149-182A.....	91
ESC336S.....	98	ETKP24WL.....	95	P16548TP.....	18	P372W.....	23	PH149-182B.....	91
ESC430A.....	98	ETKP24WR.....	95	P16560HP.....	20	P380PV.....	23	PH149-182I.....	91
ESC430B.....	98	ETKP28H.....	93	P16560TP.....	18	P380W.....	23	PH149-182S.....	91
ESC430I.....	98	GS870924.....	120	P16572HP.....	20	P3CONB35.....	23	PH149-232A.....	91
ESC430S.....	98	GS870924D.....	120	P16572TP.....	18	P3CONB42.....	23	PH149-232B.....	91
ESC436A.....	98	GS870924MCL.....	120	P1DMK30.....	21	P3CONB50.....	23	PH149-232I.....	91
ESC436B.....	98	GS870930.....	120	P1DMK36.....	21	P3CONB57.....	23	PH149-232S.....	91
ESC436I.....	98	GS870930D.....	120	P1DMK42.....	21	P3CONB65.....	23	PM119-232A.....	91
ESC436S.....	98	GS870930MCL.....	120	P1DMK48.....	21	P3CONB72.....	23	PM119-232B.....	91
ESC530A.....	98	GS870948.....	120	P1TC24.....	19	P3CONB80.....	23	PM119-232I.....	91
ESC530B.....	98	GS870948D.....	120	P1TC30.....	19	P3CONC35.....	23	PM119-232S.....	91
ESC530I.....	98	GS870948MCL.....	120	P1TC36.....	19	P3CONC42.....	23	PM187-183A.....	91
ESC530S.....	98	GS870960.....	120	P1TC42.....	19	P3CONC50.....	23	PM187-183B.....	91
ESC536A.....	98	GS870960D.....	120	P1TC48.....	19	P3CONC57.....	23	PM187-183I.....	91
ESC536B.....	98	GS870960MCL.....	120	P1TC60.....	19	P3CONC65.....	23	PM187-183S.....	91
ESC536I.....	98	L919491.....	96	P1TC72.....	19	P3CONC72.....	23	PM187-233A.....	91
ESC536S.....	98	L919492.....	96	P20724GS.....	21	P3CONC80.....	23	PM187-233B.....	91
ESH34.....	99	LKFE.....	124	P20730GS.....	21	P3CONL35.....	22	PM187-233I.....	91
ET42424LBBFA.....	95	LNKCL.....	121	P20736GS.....	21	P3CONL42.....	22	PM187-233S.....	91
ET42424LBBFB.....	95	LNKDA.....	121	P20742GS.....	21	P3CONL50.....	22	PM187-303A.....	91
ET42424LBBFI.....	95	LNKFS.....	121	P20748GS.....	21	P3CONL57.....	22	PM187-303B.....	91
ET42424LBBFS.....	95	LNKPM.....	121	P20754GS.....	21	P3CONL65.....	22	PM187-303I.....	91
ET42424LFFA.....	95	LNKSA.....	121	P20760GS.....	21	P3CONL72.....	22	PM187-303S.....	91
ET42424LFFB.....	95	OH1524FD.....	74	P20766GS.....	21	P3CONL80.....	22	PM188-182A.....	91
ET42424LFFI.....	95	OH1524HD.....	74	P20772GS.....	21	P3CONS35.....	22	PM188-182B.....	91
ET42424LFFS.....	95	OH1524SD.....	74	P21524G.....	20	P3CONS42.....	22	PM188-182I.....	91
ET42424LOBBFA.....	95	OH1530FD.....	74	P21524GS.....	21	P3CONS50.....	22	PM188-182S.....	91
ET42424LOBBFB.....	95	OH1530HD.....	74	P21524T.....	18	P3CONS57.....	22	PM188-232A.....	91
ET42424LOBBFI.....	95	OH1530RD.....	75	P21530G.....	20	P3CONS65.....	22	PM188-232B.....	91
ET42424LOBBFS.....	95	OH1530SD.....	74	P21530GS.....	21	P3CONS72.....	22	PM188-232I.....	91
ET42424LOFFA.....	95	OH1536FD.....	74	P21530T.....	18	P3CONS80.....	22	PM188-232S.....	91
ET42424LOFFB.....	95	OH1536HD.....	74	P21536G.....	20	P3CONT35.....	22	PM188-302A.....	91
ET42424LOFFI.....	95	OH1536RD.....	75	P21536GS.....	21	P3CONT42.....	22	PM188-302B.....	91
ET42424LOFFS.....	95	OH1536SD.....	74	P21536T.....	18	P3CONT50.....	22	PM188-302I.....	91
ET42424RBBFA.....	95	OH1542FD.....	74	P21542G.....	20	P3CONT57.....	22	PM188-302S.....	91
ET42424RBBFI.....	95	OH1542HD.....	74	P21542GS.....	21	P3CONT65.....	22	PMP41.....	69
ET42424RBBFB.....	95	OH1542RD.....	75	P21542T.....	18	P3CONT72.....	22	PMP47.....	69
ET42424RBBFS.....	95	OH1542SD.....	74	P21548G.....	20	P3CONT80.....	22	PMP53.....	69
ET42424RFFA.....	95	OH1548FD.....	74	P21548GS.....	21	P3CONTT.....	22	POHRTA1524FD.....	75
ET42424RFFB.....	95	OH1548HD.....	74	P21548T.....	18	P3CONVH07.....	23	POHRTA1530FD.....	75
ET42424RFFI.....	95	OH1548RD.....	75	P21554GS.....	21	P3CONVH15.....	23	POHRTA1536FD.....	75
ET42424RFFS.....	95	OH1548SD.....	74	P21560G.....	20	P3CONVH22.....	23	POHRTA1542FD.....	75
ET42424ROBBFA.....	95	OH1560FD.....	74	P21560GS.....	21	P3CONVH30.....	23	POHRTA1548FD.....	75
ET42424ROBBFB.....	95	OH1560RD.....	75	P21560T.....	18	P3CONX35.....	22	POHRTA1560FD.....	75
ET42424ROBBFI.....	95	OH1560SD.....	74	P21566GS.....	21	P3CONX42.....	22	POHRTA1572FD.....	75
ET42424ROBBFS.....	95	OH1572FD.....	74	P2156PP.....	33	P3CONX50.....	22	POHRTA24S.....	75
ET42424ROFFA.....	95	P13524TP.....	18	P21572G.....	20	P3CONX57.....	22	POHRTA30S.....	75

Cross Reference Index

by Model Number

Model	Page	Model	Page	Model	Page
POHRTA36S.....	75	T5633ER.....	59	UHTB36.....	76
POHRTA42S.....	75	T5722EL.....	59	UHTB42.....	76
POHRTA48S.....	75	T5722ER.....	59	UHTB48.....	76
POHRTA60S.....	75	T5723EL.....	59	UHTB60.....	76
POHRTA72S.....	75	T5723ER.....	59	UHTB66.....	76
PRECPCVR.....	34	T5732EL.....	59	UHTB72.....	76
PT17-20TTP.....	93	T5732ER.....	59	WANDFS.....	121
PT17-23TTP.....	93	T5733EL.....	59	WANDFSOC.....	121
PT17-29TTP.....	93	T5733ER.....	59	YPCAFD02.....	96
RD30FB.....	75	T5822EL.....	59	YPCAFD10.....	96
RD36FB.....	75	T5822ER.....	59	YPPA2415SC.....	93
RD42FB.....	75	T5832EL.....	59	YPPA3015SC.....	93
RD48FB.....	75	T5832ER.....	59	Z15042SD.....	21
RD60FB.....	75	T5922EL.....	59	Z16542SD.....	21
SYSFS.....	125	T5922ER.....	59	Z18042SD.....	21
SYSTG.....	125	T5932EL.....	59	Z2UP24.....	74
T52024S.....	56	T5932ER.....	59	Z2UP30.....	74
T52030S.....	56	T612FB.....	67	Z2UP36.....	74
T52036S.....	56	T624CB.....	67	Z2UP42.....	74
T52042S.....	56	T624FB.....	67	Z2UP48.....	74
T52048S.....	56	T630FB.....	67	Z2UP60.....	74
T52054S.....	56	T6BK.....	67	Z4UP24.....	74
T52060S.....	56	T6CB12L.....	67	Z4UP30.....	74
T52066S.....	56	T6CB12R.....	67	Z4UP36.....	74
T52072S.....	56	T6CB18L.....	67	Z4UP42.....	74
T52078S.....	56	T6CB18R.....	67	Z4UP48.....	74
T52084S.....	56	T6CB24L.....	67	Z4UP60.....	74
T52090S.....	56	T6CB24R.....	67	Z5SC42.....	57
T52096S.....	56	T6SB.....	67	Z5SC48.....	57
T52424S.....	56	T7DV.....	74, 76	Z5SC54.....	57
T52430S.....	56	TAWG.....	34	Z5SC60.....	57
T52436S.....	56	TK365YEB.....	68	Z5SC66.....	57
T52442S.....	56	TK365YM.....	68	Z5SC72.....	57
T52448S.....	56	TKCWD29L.....	68	Z5SC78.....	57
T52454S.....	56	TKCWD29R.....	68	Z5SC84.....	57
T52460S.....	56	TKDPA29L.....	68	ZS24.....	74
T52466S.....	56	TKDPA29R.....	68	ZS30.....	74
T52472S.....	56	TKEB29L.....	68	ZS36.....	74
T52478S.....	56	TKEB29R.....	68	ZS42.....	74
T52484S.....	56	TKEP1129PL.....	67, 68	ZS48.....	74
T52490S.....	56	TKEP1129PR.....	67, 68	ZS60.....	74
T52496S.....	56	TKEP2429PL.....	67, 68	ZS72.....	74
T53024S.....	56	TKEP2429PR.....	67, 68	ZW810H.....	117
T53030S.....	56	TKEP3029PL.....	67, 68	ZW810S.....	117
T53036S.....	56	TKEP3029PR.....	67, 68	ZW810T.....	117
T53042S.....	56	TKMP60.....	69	ZW820D.....	117
T53048S.....	56	TKMP66.....	69	ZW820DH.....	117
T53054S.....	56	TKMP72.....	69	ZW82KIT.....	117
T53060B.....	60	TKPPBL.....	67	ZW8LT.....	117
T53060S.....	56	TKPPBR.....	67	ZW8SM.....	117
T53066B.....	60	TKSB29.....	68		
T53066S.....	56	TKSL2429P.....	67, 68		
T53072B.....	60	TKSL3029P.....	67, 68		
T53072PL.....	60	TN52424SD.....	58		
T53072PR.....	60	TT53024CB.....	58		
T53072S.....	56	TT53624CB.....	58		
T53078S.....	56	TT53660BT.....	57		
T53084S.....	56	TT53666BT.....	57		
T53090S.....	56	TT53672BT.....	57		
T53096S.....	56	TT54224CB.....	58		
T53624CR.....	58	TT54824CB.....	58		
T53660B.....	60	TT629SC.....	67		
T53666B.....	60	TWTH.....	74		
T53672B.....	60	U7WDA.....	109		
T54224CR.....	58	U9WTC.....	34		
T54230CR.....	58	UH6536FDA.....	76		
T54662JL.....	60	UH6536FDN.....	76		
T54662JR.....	60	UH6536FDS.....	76		
T54663JL.....	60	UH6542FDA.....	76		
T54663JR.....	60	UH6542FDN.....	76		
T54722JL.....	60	UH6542FDS.....	76		
T54722JR.....	60	UH6548FDA.....	76		
T54723JL.....	60	UH6548FDN.....	76		
T54723JR.....	60	UH6548FDS.....	76		
T54824CR.....	58	UH6560FDA.....	76		
T54830CR.....	58	UH6560FDN.....	76		
T5622EL.....	59	UH6560FDS.....	76		
T5622ER.....	59	UH6566FDA.....	76		
T5623EL.....	59	UH6566FDN.....	76		
T5623ER.....	59	UH6566FDS.....	76		
T5632EL.....	59	UH6572FDA.....	76		
T5632ER.....	59	UH6572FDN.....	76		
T5633EL.....	59	UH6572FDS.....	76		

GRADE A	GRADE A – continued	GRADE A – continued	GRADE B – continued	PARTNERSHIP – GRADE C
APPOINT PANEL <i>100% Polyester</i> Artichoke.....APN911 Blackberry.....APN932 Bronze.....APN922 Carbon.....APN928 Chair.....APN912 Cherry.....APN930 Dark Pewter.....APN917 Dune.....APN915 Espresso.....APN923 Framboise.....APN931 Frost.....APN934 Jet.....APN927 Lawn.....APN925 Mandarin.....APN929 Morel.....APN909 Nimbus.....APN916 Platinum.....APN924 Turquoise.....APN926 BINARY NEW! † Blush.....BNRY12 Coal.....BNRY06 Cream.....BNRY01 Denim.....BNRY08 Diamond.....BNRY03 Graphite.....BNRY05 Juniper.....BNRY10 Lagoon.....BNRY07 Lavendar.....BNRY11 Mineral.....BNRY04 Reef.....BNRY09 Sand Dollar.....BNRY02 ELEMENT <i>100% Polyester</i> Flint.....GN965 Indigo.....GN967 Latte.....GN973 Millet.....GN972 Parchment.....GN953 Sea.....GN974 Veil.....GN913 Warm Beige.....GN955 Wisp.....GN975 ETCH <i>100% Polyester</i> Axis WECH913 Blend WECH914 Cast WECH912 Highlight WECH910 Midtone WECH911 Outline WECH908 Shade WECH909 Tonal WECH916 Vanish WECH915	EXCHANGE <i>100% Polyester</i> Iron WEXG916 Nickel WEXG914 Pistachio WEXG910 Root WEXG913 Rupee WEXG903 Shadow WEXG911 Silver WEXG915 Sisal WEXG917 Stone WEXG912 LANDSCAPE <i>100% Polyester</i> Cornsilk.....LN15 Drift.....LN05 Khaki.....LN20 Sheen.....LN10 Slate.....LN35 Umber.....LN25 Urban.....LN30 LUCY <i>100% Recycled Polyester</i> Aspen.....LC932 Cornsilk.....LC930 Dusk.....LC922 Fawn.....LC933 Graphite.....LC934 Mist.....LC920 Neutra.....LC924 Pewter.....LC935 Snowdrop.....LC928 REFLECTIONS <i>100% Recycled Polyester</i> Galvanized.....REF929 Ice.....REF920 Loggia.....REF921 Mistral.....REF928 Moonstone.....REF923 Pewter.....REF922 Stainless.....REF924 Vanilla.....REF925 Winter.....REF927 REFUGE <i>64% Recycled Polyester</i> <i>36% Polyester</i> Artesian.....RFG996 Dune.....RFG992 Eclipse.....RFG990 Frost †.....RFG993 Glacier †.....RFG991 Mineral.....RFG998 Tidal.....RFG994 SARTO ▼ <i>100% Polyester (45% Recycled)</i> Ash WSRT988 Fog WSRT914 Lemongrass WSRT949 Mist WSRT945 Mushroom WSRT976 Oyster WSRT918 Reef WSRT964 Sesame WSRT993 Shale WSRT952	TANGO ▢ <i>100% Polyester (RR only on 72" W panels)</i> Aficionado WTG994 Azul WTG993 Bongo WTG980 Dip WTG982 Palma WTG991 Pecan WTG985 Pistachio WTG986 Playa WTG933 Salsa WTG987 Sol WTG992 Tequila WTG990 TEMPEST <i>100% Recycled Polyester</i> Dragonfly WTP930 Frost WTP915 Full Stream WTP980 Gold Rush WTP910 Slate WTP945 Tumbleweed WTP970 Wind Chill WTP940 Zebra WTP935 GRADE B DISPERSE NEW! † <i>100% Polyester</i> Autumn.....DISP03 Branch.....DISP10 Coffee Bean.....DISP13 Dusk.....DISP09 Emerald City.....DISP08 Gold Rush.....DISP02 Igloo.....DISP11 Ink.....DISP06 Mist.....DISP12 Oatmeal.....DISP15 Prince.....DISP07 Reservoir.....DISP01 Rose.....DISP04 Spring.....DISP05 Steel.....DISP16 Taupe.....DISP14 MICA <i>100% Recycled Polyester</i> Anthracite.....MCA911 Breeze.....MCA918 Bronze.....MCA913 Buff.....MCA914 Cremini.....MCA917 Crystal †.....MCAWIT Dew.....MCA920 Dove.....MCA912 Fresh.....MCA916 Mineral.....MCA915 Nectar.....MCA919 Shale.....MCA910 SPIN PANEL <i>46% Recycled Polyester,</i> <i>56% Polyester</i> Alabaster.....SPIN02 Cavern.....SPIN03 Cobblestone.....SPIN04 Ember.....SPIN06 Flame.....SPIN07 Heron.....SPIN13 Oat.....SPIN01 Ocean.....SPIN12 Plum.....SPIN15 Pool.....SPIN11 Raven.....SPIN10 Rhubarb.....SPIN14 Tropic.....SPIN08 Willow.....SPIN05	TERRAIN <i>52% Recycled Polyester,</i> <i>48% Polyester</i> Bay.....TRRN05 Bayou.....TRRN35 Canyon.....TRRN30 Cliff.....TRRN45 Crest.....TRRN25 Delta.....TRRN10 Plateau.....TRRN15 Ridge.....TRRN20 Valley.....TRRN40 ALLSTEEL PARTNERSHIP PROGRAM Allsteel understands that customers may want to specify panel and seating textiles outside of Allsteel's standard offering. Allsteel's Partnership Program consists of on-trend and design-forward patterns that have been tested and approved by Allsteel for use on Allsteel products. A subset of these approved patterns is available on cards in the textile binder, while numerous others are available on our website, allsteeloffice.com. For memo samples, please contact our partners: - Camira, memos@camirafabrics.com 1.616.288.0655 - Carnegie, carnegiefabrics.com 1.800.727.6770 - CF Stinson, cfstinson.com 1.800.841.6279 - Edelman, edelmanleather.com 1.800.886.8339 - HBF Textiles, hbftextiles.com 1.877.494.5727 - Maharam, maharam.com 1.800.645.3943 - Momentum Textiles, memosamples.com 1.800.366.6839 - Ultrafabrics, ultrafabricsllc.com The intent of the Partnership Program is to offer a wide variety of on-trend textiles to meet your varied needs, but since these textiles are not part of our standard offering they may be subject to extended lead times. Because new materials will be introduced regularly, Allsteel reserves the right to change the offering at any time.	Momentum SCRIPT Almond.....PMOMSCP01 Charcoal.....PMOMSCP12 Feldspar.....PMOMSCP23 Flint.....PMOMSCP34 Nectar.....PMOMSCP45 Patina.....PMOMSCP56 Pebble.....PMOMSCP67 Sand.....PMOMSCP78 Shadow.....PMOMSCP89 Slate.....PMOMSCP00 Sterling.....PMOMSCP11 Taupe.....PMOMSCP22 Zinc.....PMOMSCP33 PARTNERSHIP – GRADE D Camira BLAZER LITE NEW! † ▼ <i>(100% Pure New Wool)</i> Angel.....PCAMBLT49 Aspire.....PCAMBLT52 Balance.....PCAMBLT41 Bliss.....PCAMBLT48 Buddha.....PCAMBLT56 Cuddle.....PCAMBLT62 Dainty.....PCAMBLT64 Daydream.....PCAMBLT46 Devoted.....PCAMBLT58 Faith.....PCAMBLT68 Freedom.....PCAMBLT69 Graceful.....PCAMBLT51 Happy.....PCAMBLT55 Harmony.....PCAMBLT63 Haven.....PCAMBLT40 Hope.....PCAMBLT50 Hush.....PCAMBLT42 Love.....PCAMBLT47 Mood.....PCAMBLT44 Pamper.....PCAMBLT66 Pastel.....PCAMBLT65 Pillow.....PCAMBLT43 Praise.....PCAMBLT54 Retreat.....PCAMBLT39 Shelter.....PCAMBLT60 Solace.....PCAMBLT70 Tender.....PCAMBLT53 True.....PCAMBLT61 Verity.....PCAMBLT57 Wish.....PCAMBLT67 Worship.....PCAMBLT59

▢ Discontinued 12/31/2018

W Panel fabric is available 72" wide for Optimize panels.
 † Panel fabric is not available on Concensys®.
 ◆ Panel fabric is not available on Involve®.
 ▼ Panel fabric is not available on Further™.

Multi-use fabrics are seating fabrics that can be used on specific Allsteel panels systems, providing more color and pattern options. The applicable Allsteel multi-use fabrics are noted with System designators in the Seating, Collaboration & Tables Price List.

Showrooms

Atlanta
Boston
Chicago
Dallas
Los Angeles
New York
San Francisco
Washington, DC

Allsteel®

Allsteel Inc.
Muscatine, Iowa 52761

allsteeloffice.com

Form # A8524.A1 (07/18)

©2018 Allsteel Inc.
All registered trademarks and trademarks
are the property of Allsteel Inc.

