


Ollin/Flo® Two-Piece Clamp

Y93001

Mount - Extended Height



Product Information

Description

This extended height 2-piece clamp mount attaches a Flo® single screen monitor arm-arm only or an Ollin single screen monitor arm-arm only 8³/₈" above a work surface. It is for use with the Monto Sit Stand Riser or with other desktop retrofittable sit stand solutions. Attachment hardware included.

Notes

Compatible with Ollin single screen and Flo single screen monitor arms.

For monitor arm attachment at the worksurface, order Flo 2-piece clamp mount (Y92092.) separately.

Clamp works on surfaces greater than 0" to less than 2¹/₂" thick.


Order the following products separately:


- Ollin single screen monitor arm-arm only (Y95000.)
- Flo single screen monitor arm-arm only (Y92090.)
- Monto Sit Stand Riser (Y93000.)

Dimensions

Specification Information

Step 1.		
Y93001.		\$179
Step 2. Finish		
OH	black A	+\$0
OI	silver	+\$0
OJ	white	+\$0

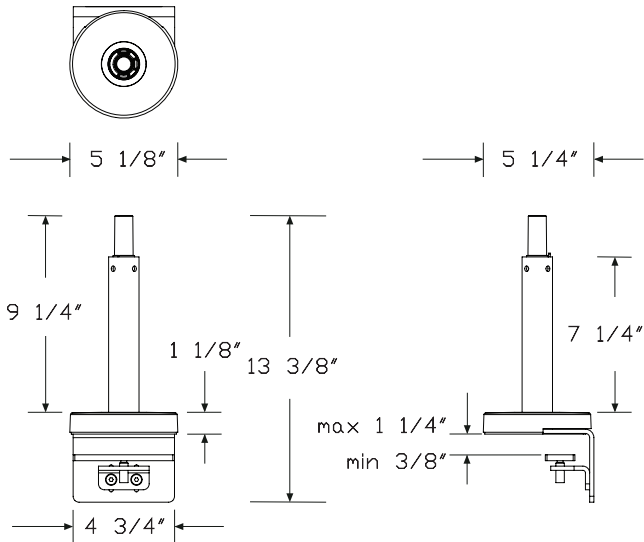



Product Information

Description

This low profile clamp is used to attach a Flo® single screen monitor arm - arm only (Y92090) or an Ollin single screen monitor arm - arm only (Y95000.) to a work surface. The clamp is top mounted to speed installation. Attachment hardware is included.


Notes


Flo low profile clamp is compatible with Ollin monitor arms.
Order Ollin single screen monitor arm - arm only (Y95000.) separately.
Order Flo single screen monitor arm - arm only (Y92090) separately.
Clamp works on surfaces greater than 3/4" to less than 1 1/4" thick.

Dimensions

Specification Information		
Step 1.		
Y92106.	A	\$85
Step 2. Finish		
01	silver A	+\$0

Thrive™ Technology Support

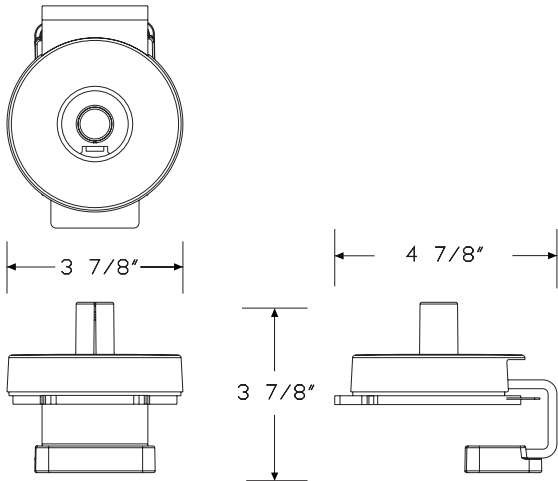



Product Information

Description

The Ondo Connectivity Module seamlessly integrates with a Flo®, Ollin®, Lima™, Flo Modular or Wishbone® monitor arm on the worksurface to offer fast, clutter-free connections between a laptop and other technology on the desk. Used in conjunction with the user's preferred docking station, it neatly manages all power, data, monitor, mouse, and keyboard connections and offers USB charging and connectivity of mobile devices such as phones and tablets.

Notes

Ondo can be retrofitted into existing Colebrook Bosson Saunders (CBS) monitor arm installations. It integrates into the two-piece surface clamp mount or low-profile clamp of Flo (Y91171.CM or Y91171.LPC) and Ollin (Y95111.1CM or Y95111.1LPC) into the post clamp attachment of Lima (Y97211.) or into the Wishbone post top-mounting surface clamp (Y92052.) when adding Ondo post clamp spacer (Y92203.). This assembly includes a module with 2 USB-A ports and 2 USB-C ports, a clamp cover of specified finish and the option of a laptop cable USB-C, 39³/₈" (1 m) long.

Ondo integrates with Flo two-piece clamp mount (Y92092.), Flo low profile clamp (Y92106.), the post-clamp attachment of Lima (Y97211.) or the Wishbone post top-mounting surface clamp (Y92052.) when adding Ondo post clamp spacer (Y92203.).

Docking station not included.

USB-A ports are 3.1 Gen1, for data transfer up to 5Gbps and support charging 12 watts of power (5V, 2.4A max). USB-C ports are 3.0, for data transfer up to 5Gbps and support charging 15 watts of power (5V, 3.0A max).

Laptop cable option (LC) includes a USB-C 3.1 cable 39³/₈" (1 m) long, female-to-male connector, 10Gbps, power delivery 2.0 capable and 60W maximum. Compatible with all laptops with USB-C ports. Select this option when the cable supplied with your chosen docking station is not suitable or long enough.


Finish for module and laptop cable is black (OH). Finish for clamp cover is specified as silver (OI), white (OJ) or black (OH).

Order the following products separately:

- Ondo post clamp spacer (Y92203.) for use with Wishbone or Flo Modular only
- Ollin single-screen monitor arm support (Y95111.1CM or Y95111.1LPC)
- Flo single-screen monitor arm support (Y91171.CM or Y91171.LPC)
- Lima monitor arm (Y97211.L1LC or Y97211.L2LC)
- Flo modular (Y91180.) with surface clamp mount (CM)
- Wishbone monitor arm family with clamp mount (WC)

To mount docking station under desk, order Loop Micro (Y92111.) separately.

Dimensions

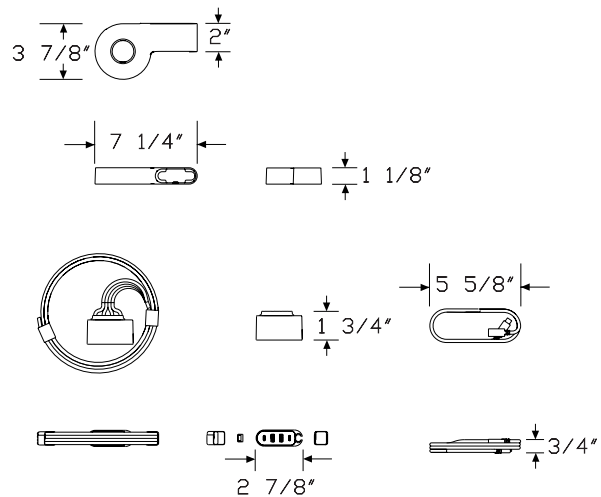


Ondo Connectivity Module *continued*

Specification Information		
Step 1.		
Y92110. <input type="checkbox"/>		
Step 2. Connection Type		
AC	two USB-A ports and two USB-C ports <input type="checkbox"/>	
Step 3. Cable Option		
NN	no laptop cable <input type="checkbox"/>	
LC	laptop cable <input type="checkbox"/>	
Prices for Steps 1-3.		
	NN	LC
Y92110. AC	\$294	368
Step 4. Finish		
OI	silver <input type="checkbox"/>	+\$0
OJ	white <input type="checkbox"/>	+\$0
OH	black <input type="checkbox"/>	+\$0

Ondo Connectivity Module - Y92112

Worksurface Mount Assembly



Product Information

Description

This assembly attaches the Ondo module (included) directly onto a work surface, independent of a monitor arm. It offers fast, clutter-free connections between a laptop and other technology on the desk. Used in conjunction with the user's preferred docking station, it neatly manages all power, data, monitor, mouse, and keyboard connections and offers USB charging and connectivity of mobile devices such as phones and tablets. The clamp mount has a soft-grip under-clamp pad for secure grip and surface protection. Mount can be placed in desired position along surface edge.

Notes

Assembly includes a module with 2 USB-A ports and 2 USB-C ports, a free-standing clamp mount with specified finish, and the option of a laptop cable USB-C, 39³/₈" (1 m) long.

Clamp works on surfaces greater than 0.39" (10 mm) to less than 1.5" (38 mm) thick.

USB-A ports are 3.1 Gen1, for data transfer up to 5Gbps and support charging 12 watts of power (5V, 2.4A max). USB-C ports are 3.0, for data transfer up to 5Gbps and support charging 15 watts of power (5V, 3.0A max).


Laptop cable (LC) option includes a USB-C 3.1 cable 39³/₈" (1 m) long, female-to-male connector, 10Gbps, power delivery 2.0 capable and 60W maximum. Compatible with all laptops with USB-C ports. Specify this option when the cable supplied with your chosen docking station is not suitable or long enough.

Finish for module and laptop cable is black (0H). Worksurface mount finish is specified.

To mount a docking station under desk, order Loop Micro (Y92111.) separately.

Docking station not included.


Dimensions

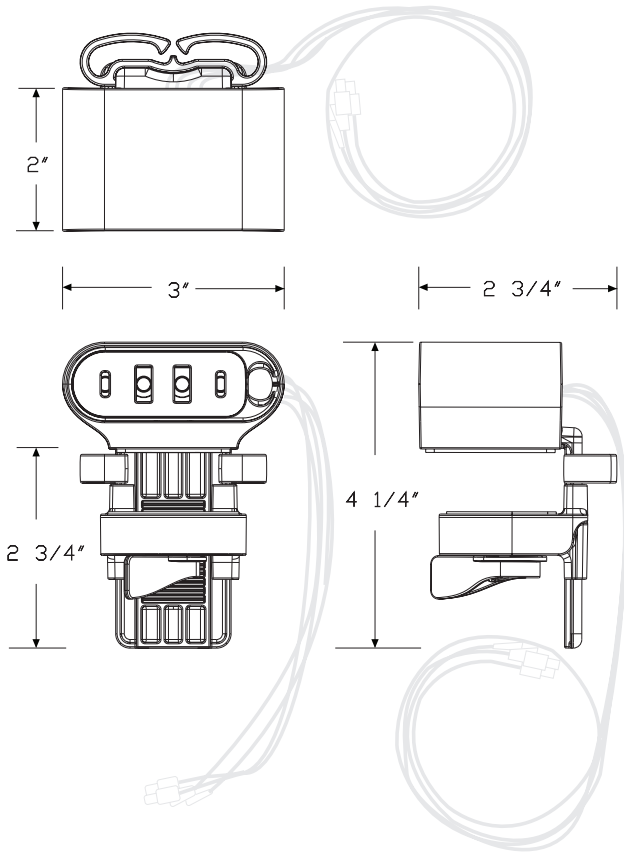

Ondo Connectivity Module - Workspace Mount Assembly

continued

Specification Information		
Step 1.		
Y92112. <input type="checkbox"/>		
Step 2. Connection Type		
AC	two USB-A ports and two USB-C ports <input type="checkbox"/>	
Step 3. Cable Option		
NN	no laptop cable <input type="checkbox"/>	
LC	laptop cable <input type="checkbox"/>	
Prices for Steps 1-3.		
	NN	LC
Y92112. AC	\$311	385
Step 4. Finish		
OI	silver <input type="checkbox"/>	+\$0
OJ	white <input type="checkbox"/>	+\$0
OH	black <input type="checkbox"/>	+\$0



Product Information

Description

The Ondo Module integrates with a Flo®, Ollin®, Lima™, Flo Modular or Wishbone monitor arm using a clamp cover (not included) to offer fast, clutter-free connections between a laptop and other technology on the desk. Used in conjunction with the user's preferred docking station, it neatly manages all power, data, monitor, mouse, and keyboard connections and offers USB charging and connectivity of mobile devices such as phones and tablets.

Notes

Ondo integrates with Flo two-piece clamp mount (Y92092.), Flo low profile clamp (Y92106.), the post-clamp attachment of Lima (Y97211.) or the Wishbone post top-mounting surface clamp (Y92052.) when adding Ondo post clamp spacer (Y92203.).

This module has 2 USB-A ports and 2 USB-C ports.


USB-A ports are 3.1 Gen1, for data transfer up to 5Gbps and support charging 12 watts of power (5V, 2.4A max). USB-C ports are 3.0, for data transfer up to 5Gbps and support charging 15 watts of power (5V, 3.0A max).

Docking station not included.

Order the following products separately:


- Ondo clamp cover (Y92201.)
- Ondo laptop cable (Y92202.)
- Ondo post clamp spacer (Y92203.) for use with Wishbone or Flo Modular only
- Ollin single-screen monitor arm support (Y95111.1CM or Y95111.1LPC)
- Flo single-screen monitor arm support (Y91171.CM or Y91171.LPC)
- Lima monitor arm (Y97211.L1LC or Y97211.L2LC)
- Flo modular (Y91180.) with surface clamp mount (CM)
- Wishbone monitor arm family with clamp mount (WC)

Dimensions

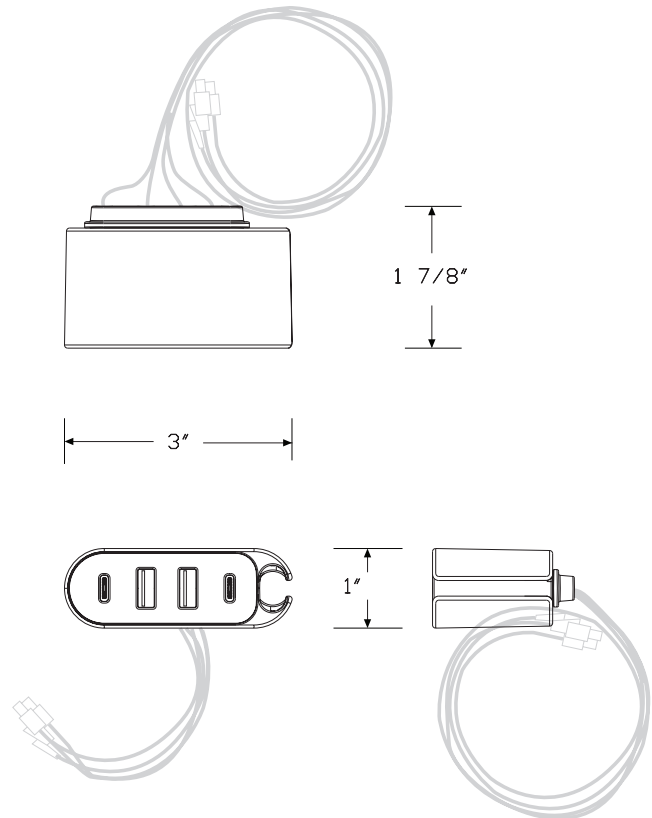

Ondo Module *continued*

Specification Information		
Step 1.		
Y92200.	<input type="checkbox"/> A	
Step 2. Connection Type		
AC	two USB-A ports and two USB-C ports <input type="checkbox"/> A	
Prices for Steps 1-2.		
Y92200. AC		\$261
Step 3. Finish		
OH	black <input type="checkbox"/> A	+\$0



Product Information

Description

The Ondo Clamp Cover houses the Ondo Module (not included) to integrate with an existing installation of a Flo®, Ollin®, Lima™, Flo Modular or Wishbone® monitor arm to offer fast, clutter-free connections between a laptop and other technology on the desk. Used in conjunction with the user's preferred docking station, it neatly manages all power, data, monitor, mouse, and keyboard connections and offers USB charging and connectivity of mobile devices such as phones and tablets.

Notes

For use with Flo or Ollin monitor arms, Ondo clamp cover replaces the clamp cover of the Flo two-piece clamp mount (Y92092.) or Flo low profile clamp (Y92106.).


For use with Lima monitor arm (Y97211.), Ondo clamp cover integrates with the post-clamp attachment.

For use with Flo Modular (Y91180.) or Wishbone monitor arms, Ondo clamp cover replaces the clamp cover of the Wishbone post top-mounting surface clamp (Y92052.) and requires the addition of Ondo post clamp spacer (Y92203.) for added stability of post.

Order the following products separately:

- Ondo module (Y92200.)
- Ondo laptop cable (Y92202.), if required.
- Ondo post clamp spacer (Y92203.) for use with Wishbone or Flo Modular only
- Ollin single-screen monitor arm support (Y95111.1CM or Y95111.1LPC)
- Flo single-screen monitor arm support (Y91171.CM or Y91171.LPC)
- Lima monitor arm (Y97211.L1LC or Y97211.L2LC)
- Flo modular (Y91180.) with surface clamp mount (CM)
- Wishbone monitor arm family with clamp mount (WC)


Dimensions

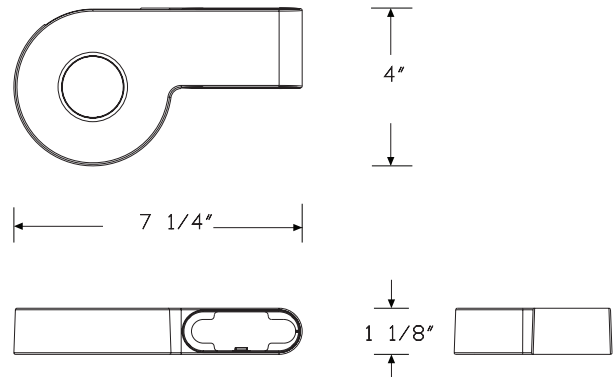

Specification Information		
Step 1.		
Y92201.	<input type="checkbox"/> A	\$33
Step 2. Finish		
0I	silver <input type="checkbox"/> A	+\$0
0J	white <input type="checkbox"/> A	+\$0
0H	black <input type="checkbox"/> A	+\$0

Ondo Laptop Cable

Y92202



Product Information

Description

The Ondo Laptop Cable is a USB-C 3.1 (female) to USB-C (male) cable that connects a laptop on a work surface to a docking station under the surface. Cable length is 39³/₈" (1 m).

Notes

Use this product when the cable supplied with your chosen docking station is not suitable or long enough.

Ondo Laptop Cable is a USB-C 3.1 cable 39³/₈" (1 m) long with female-to-male connector, 10Gbps. Power delivery 2.0 capable and 60W maximum. Compatible with all laptops with USB-C ports.

Order the following products separately:

- Ondo module (Y92200.)
- Ondo clamp cover (Y92201.)

Dimensions


Specification Information

Step 1.

Y92202.	A	\$74
---------	---	------


Step 2. Finish

0H	black	A	+\$0
----	-------	---	------




Ondo Post Clamp Spacer

Y92203



Product Information
Description
This spacer works with the Wishbone® Post Top-Mounting Surface Clamp to integrate Ondo Connectivity Module with an existing installation of Wishbone Post such as Flo® Modular or Wishbone monitor arms. It provides space stability in the clamp by adding a secure hold for the post and Ondo.
Notes
Order the following products separately:
<ul style="list-style-type: none">• Wishbone post top-mounting surface clamp (Y92052.)• Ondo connectivity module (Y92110.)• A post-mounted monitor arm such as Wishbone or Flo Modular.
Dimensions

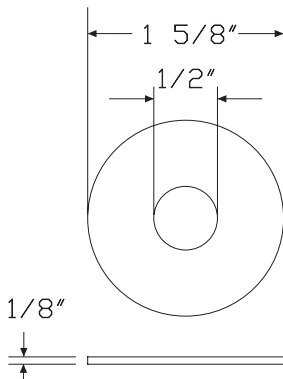


Specification Information
Step 1.
Y92203. A
Step 2. Finish
01 silver A
Prices for Steps 1-2.
Y92203. 01 \$3

Thrive™ Technology Support

Ondo Worksurface Mount - Mount Only

Y92204



Product Information

Description

This worksurface mount attaches the Ondo module (not included) directly onto a work surface, independent of a monitor arm. The clamp mount has a soft-grip under-clamp pad for secure grip and surface protection. Mount can be placed in desired position along surface edge.

Notes


Clamp works on surfaces greater than 0.39" (10 mm) to less than 1.5" (38 mm) thick.

Order the following products separately:

- Ondo module (Y92200.)
- Ondo laptop cable (Y92202.), if required


Dimensions

Specification Information			
Step 1.			
Y92204.	A		\$50
Step 2. Finish			
0I	silver	A	+\$0
0J	white	A	+\$0
0H	black	A	+\$0

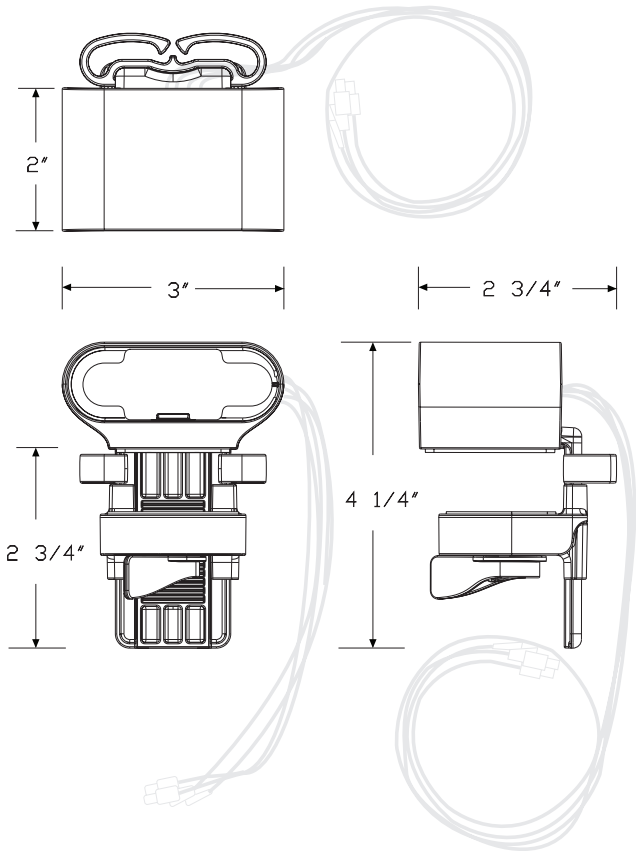

Flo® Through Mount

Y92094



Product Information

Description

This through-mount is used to attach a Flo® single screen monitor arm - arm only (Y92090) or an Ollin single screen monitor arm - arm only (Y95000.) to a work surface. Includes through-surface mounting bracket selected based on thickness of work surface.

Notes

Flo through mount comes standard in black finish that is compatible with black finish on Flo and Ollin monitor arms.


This bracket comes with 2 interchangeable snap-fit rings; 1 light gray and 1 dark gray. Light gray rings are compatible with white finish Flo and Ollin monitor arms, and dark gray ring is compatible with silver finish Flo and Ollin monitor arms.

Flo through mount is compatible with Ollin monitor arms.

Order Ollin single screen monitor arm - arm only (Y95000.) separately.

Order Flo single screen monitor arm - arm only (Y92090) separately.

Specify mounting bracket based on surfaces up to 1 3⁄8" thick (Y92094.1) or up to 3" thick (Y92094.2).

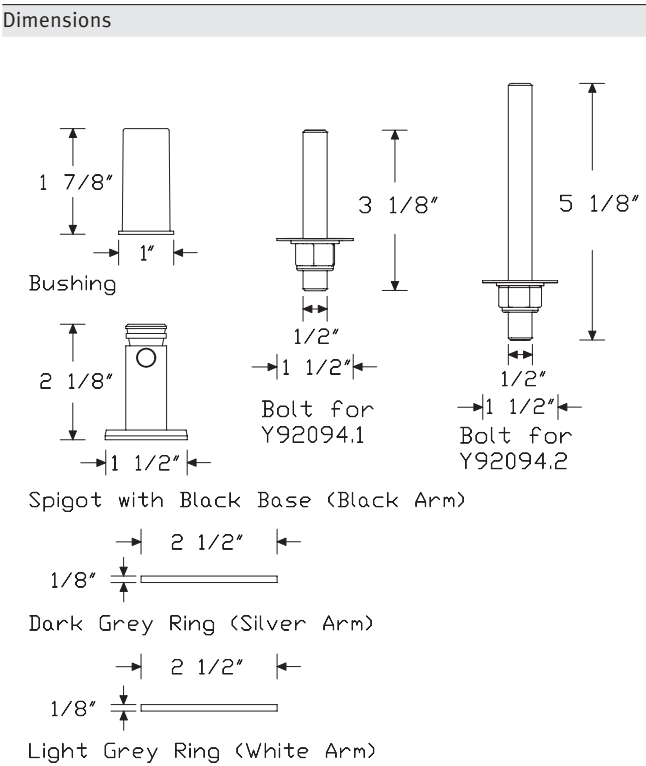

Specification Information


Step 1.

Y92094.	A	\$84
---------	---	------

Step 2. Surface Mounting

1	for surfaces up to 1 3⁄8" thick	A	+\$0
2	for surfaces up to 3" thick	A	+\$0

Flo® Through Mount with Rotation Stop Y92105



Product Information

Description

This through-mount is used to attach a Flo® single screen monitor arm - arm only (Y92090) or an Ollin single screen monitor arm - arm only (Y95000.) to a work surface through a drilled hole. It can be set to stop arm rotation at either 90° or 180° to prevent arm contact with a screen or wall. The rotational stop can be removed to allow 360° arm rotation. Includes through-surface mounting bracket selected based on thickness of work surface.

Notes

Flo through mount with rotational stop is compatible with Ollin monitor arms.




This product comes with 3 interchangeable covers: 1 light gray, 1 dark gray, and 1 black. Light gray cover is compatible with white finish Flo and Ollin monitor arms, dark gray cover is compatible with silver finish Flo and Ollin monitor arms, and black cover is compatible with black finish Flo and Ollin monitor arms.

Order Ollin single screen monitor arm - arm only (Y95000.) separately.

Order Flo single screen monitor arm - arm only (Y92090) separately.

Specify mounting bracket based on surfaces up to 1 3/8" thick (Y92105.1) or up to 3" thick (Y92105.2).

Dimensions

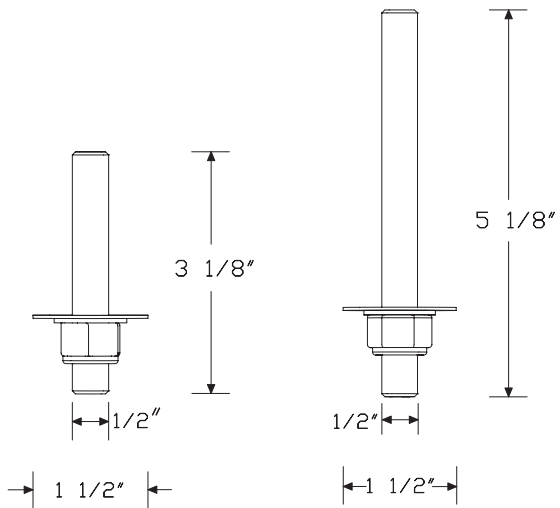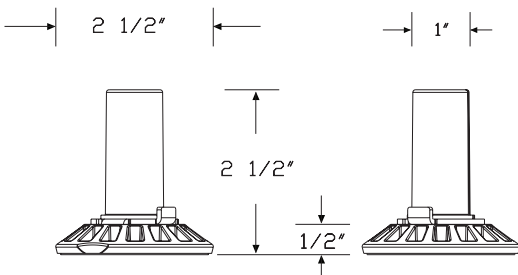

Bolt for
Y92105.1


Bolt for
Y92105.2

Flo® Through Mount with
Rotation Stop *continued*

Specification Information		
Step 1.		
Y92105. A		
Step 2. Surface Mounting		
1	for surfaces up to 1 ³ / ₈ " thick	A
2	for surfaces up to 3" thick	A
Prices for Steps 1-2.		
Y92105. 1		\$118
2		\$118

Flo® Layout Studio Attachment Pin

Y92089



Product Information

Description

This attachment pin is used with the Flo® Layout Studio® performance rail clamp to attach a Flo single screen monitor arm to a Layout Studio performance rail. Attachment hardware included.


Notes

Order the following products separately:

- Flo Layout Studio performance rail clamp (Y92098.)
- Flo single screen monitor arm-arm only (Y92090.)


Dimensions

Specification Information		
Step 1.		
Y92089.	A	\$47
Step 2. Finish		
01	silver A	+\$0

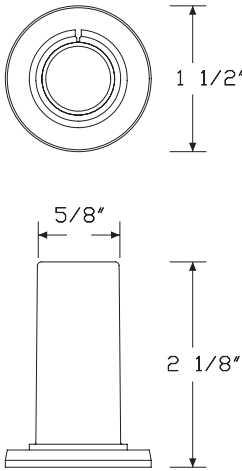

Performance Rail Clamp

Y92098



Product Information

Description

Notes

Dimensions


This clamp attaches a Flo® single screen monitor arm to a Layout Studio® performance rail. It is used with the Flo Layout Studio attachment pin, ordered separately. Clamp attachment hardware included.

Order the following products separately:


- Flo Layout Studio attachment pin (Y92089.)
- Flo single screen monitor arm-arm only (Y92090.)

Specification Information		
Step 1.		
Y92098.	<div>A</div>	\$46
Step 2. Finish		
0I	silver <div>A</div>	+\$0
0J	white <div>A</div>	+\$0

Thrive™ Technology Support

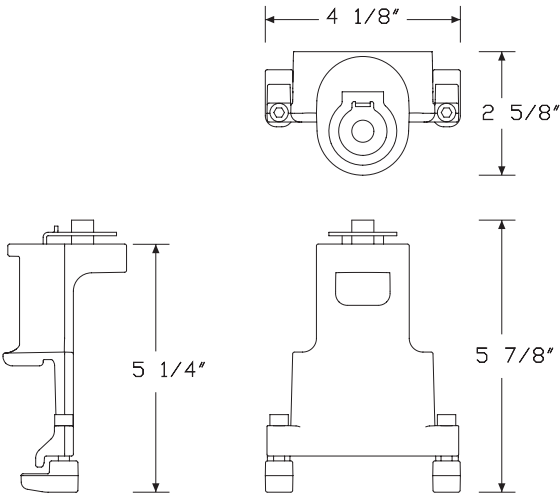


Wishbone Post Performance Rail Y92099 Clamp




Product Information
Description
This clamp attaches to a Layout Studio® performance rail to support a Wishbone® monitor arm post.
Notes
This product was designed by Colebrook Bosson Saunders Products Ltd.
Dimensions


Specification Information	
Step 1.	
Y92099. <input type="text" value="A"/>	\$95
Step 2. Finish	
01 silver <input type="text" value="A"/>	+\$0

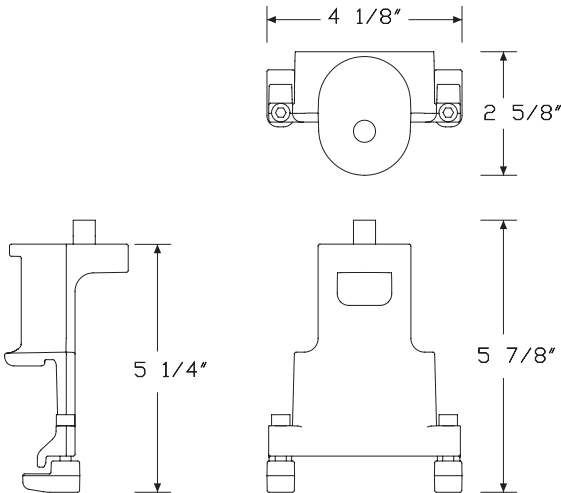

Flo® Resolve Pole Mount Bracket Y92095 - Only




Product Information
Description This bracket attaches a single Flo monitor arm to a Resolve System pole.
Notes Requires Flo single-screen monitor arm support, through-surface mount option (Y91171.T2) to complete installation.
Dimensions

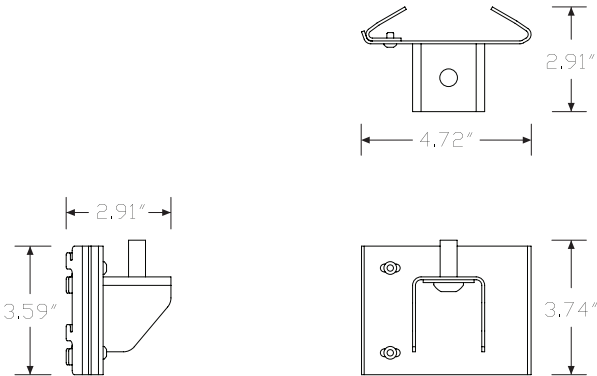

Specification Information
Step 1. Y92095.
Step 2. Finish 01 silver
\$141 +\$0

Flo® X Two-Piece Clamp Mount - Y98005
Clamp only



Product Information
Description
This clamp attaches a Flo® X Monitor Arm to a work surface. Configurable rotation stop system offers 180° or 360° rotation of arm. Attachment hardware included.
Notes
Suitable for work surface thicknesses of 3/8" to 1 3/4" (9 mm to 45 mm). Load support range up to 40 lbs. (18 kg). Order Flo X monitor arm-arm only (Y98000.) or Flo X multi mount monitor arm-arm only (Y98001.) separately.
Dimensions

Specification Information
Step 1.
Y98005. A \$103
Step 2. Finish
01 silver A +\$0

