

Table of Contents

Introduction	3
Product Map	5
Conditions of Sale	6
Manufacturing Standards	8
How to Use the Price List	0
How to Order Double Desks	10
Appendix A: Colors and Finishes	11
Appendix B: Grommet and Communication Box	
Appendix C: Modesty Panel	13
Appendix D: Wood Grain	
Appendix E: Drawer Option	10
Appendix F: Calculation and Use of Electrical Components	16
Appendix G: Electrical Wire Management Solutions	17
Appendix H: Storage under worksurface	18

Height Adjustable Desks	20
Rectangular Desk	21
Rectangular Desk with Laminate Panel Leg	22
Double Rectangular Desk with Laminate Panel Leg	26
Rectangular Desk with Laminate Boxed Leg	30
Divider Screens	35
Acrylic	36
Laminate	
Tackboards	43
Accessories	46
Handles	47
Keyboard Trays	
CPU Holders	
Miscellaneous Accessories	
Electrical Accessories	

Introduction

Elevation is your solution for providing users with the flexibility to work at different heights depending on their task, energy level or mood. The result is a more productive and healthier work environment. Height-adjustable Elevation desks can be built into any Logiflex furniture line, from private offices to benching layouts. Elevation also provides workstation electrification and wire management solutions.

Update Summary

The December 22, 2017 revision of the Elevation price list presents these principal modifications:

DATE	SECTION	MODIFICATION
Date	Section	Modification

Introduction Product Map Height Adjustable Desks p. 21 Double Rectangular Desk with Laminate Panel Rectangular Desk Rectangular Desk with Laminate Panel p. 22 p. 26 Laminate Wire Management p. 34 Rectangular Desk with Laminate Boxed Leg p. 30 **Divider Screens** p. 36 Tackboard Laminate p. 40 Acrylic

Introduction

Conditions of Sale

Prices

The amounts listed in this document are suggested retail prices and may be changed without notice. Applicable taxes are not included. If you have an open and active account with Logiflex, merchandise will be invoiced at the prices prevailing at the time of shipment. A deposit may be requested if the opening of your account has not been completed or if your account has become inactive.

Terms of Payment

Net 30 days F.O.B. Sherbrooke, Quebec. The invoice will be assigned the shipping date and is payable 30 days from that date. Logiflex remains the owner of the merchandise until the invoice is paid in full.

Customized Products (Special Items)

Price requests for customized products or special items can be submitted via the "Online Services" section of our website, at www.logiflex.ca. Our quotations department will study your request and send you a quotation and a technical drawing for approval as soon as possible. Modifications to quotations or technical drawings can be requested the same way. The approved quotation(s) and technical drawing(s) can then be attached to your purchase order.

Orders

An official purchase order must be issued for all purchases. Your purchase order must contain the following information:

- Your company letterhead
- Your reference number
- The delivery address (with contact name and phone number)
- The complete product codes
- Furniture colour(s)
- Quantities
- Descriptions
- Retail prices and net prices
- Project registration number (if applicable), and your approved quotation and technical drawing (for special items).

Please note that a quotation cannot serve as a purchase order.

Returns

All returns must first be approved by Logiflex. If the return is accepted, a Logiflex customer service representative will send you an official return authorization form in order to facilitate procedures between you, the carrier, and the Logiflex merchandise reception clerk. Additional costs for shipping or other expenses may be applied following any merchandise returns.

Modifications and/or Cancellations

You have 24 hours from the time we acknowledge receipt of your order to make any requests for corrections or modifications. You may cancel your order during this same 24-hour period. If you would like to modify or cancel your order after this 24-hour verification period, please check with a Logiflex customer service representative. Orders cannot be changed or cancelled if production has already begun or if Logiflex has already received the raw materials.

Liability

Logiflex's liability ends once the carrier has delivered all items in good condition. A delivery receipt signed by the customer acknowledges that the shipment is complete and has been received in good condition.

Claims

Logiflex recommends inspecting the shipment before signing the carrier's delivery receipt. You must notify Logiflex of any incomplete shipments or damaged furniture as soon as possible. Requests to replace damaged products can be made via the "Online Services" section of our website, at www.logiflex.ca. Our after-sales service department will examine your request and help you correct the situation.

Changes

Logiflex reserves the right to make changes to the materials, accessories, components, specifications and designs, and to discontinue collections and/or models, at any time and without prior notice.

Storage and/or Shipping Fees

If you would like to delay the delivery of an order already in production at Logiflex, weekly storage fees may be charged. The suggested retail prices in this list may include delivery; however, some conditions may apply. If your order is a minimum of \$10,000 net, the order can be shipped directly to your customer. In this case, a 53-foot unloading dock must be available at the time of delivery. This information must first be validated with your Logiflex customer service representative. Direct shipping is subject to additional fees. Any delay experienced by Logiflex carriers during delivery may also result in additional charges.



Conditions of Sale (continued)

Warranty

Logiflex guarantees to the original purchaser that Logiflex products are free from defects in design, materials and workmanship for the products' lifetime. Effective as of the date invoiced to the distributor, the warranty is valid only for products bought new from an authorized Logiflex distributor and as long as the original purchaser owns the products. The warranty period will be reduced proportionately if the products are used over a period exceeding the equivalent of a shift of 40 hours/week.

This warranty applies only to normal use of the product and is limited to the repair or replacement of said product at Logiflex's discretion. All replacement parts will be shipped to the original shipping address. Transportation and labor are not covered by this warranty. By accepting the product at its delivery, the buyer accepts these conditions.

Limited Lifetime Warranty: Access, Knockout, Level, Logilife, Manhattan, Millenium, Reception and Tables (Conference, Occasional, Multimedias)

5 Year Warranty: Academic, Soft Seating, Madrid and Elevation **10 Year Warranty:** Chairs

or use of components or materials that have not been authorized by Logiflex;

renovation

resulting from:

Renting to a third party;

- Natural properties of materials;
- For leather products: normal defects in leather such as: scars, marks or difference in stain within a leather skin or between different skins;

This warranty does not apply to defects or damages

Negligence, misuse, abuse or accident;

Normal wear and tear occurring with the use of the

Substitution, modification, transformation, repair,

- Exposure to sunlight or environments with extreme temperature/humidity conditions;
- Damage caused by a carrier in transit, or delivery/ installation contractors.

This warranty does not include:

- Parts and materials supplied by the customer (COM);
- Special finishes applied to Logiflex products;
- The matching of colors, grains or textures of wood due to its natural properties;
- Non-standard Logiflex products;
- Logiflex product not installed or used in accordance with the Logiflex installation guidelines;
- Bulbs and ballasts.

Restrictions:

- 1 year warranty on electrical components and hardware;
- 5 year warranty on seat mechanisms, drawer slides and locks:
- 5 year warranty on urethane parts;
- 5 year warranty on upholstery and casters

Introduction

Manufacturing Standards

Handles

Handles are included with all storage furniture. The standard is H052SN. Please refer to the Logiflex accessories selection at the end of this price list on p. 47.

Pedestals

All drawers are made of black Medium density fiberboard (MDF) with an average thickness of 7/16".

Drawer Fronts

A PVC strip 2 mm thick is systematically applied along all drawer front edges.

Levelers


All furniture items sit on 1" in diameter, white nylon levelers, allowing for up to 1-1/4" height adjustment.

Colors


Colors have to be specified for all furniture items ordered. Consult the "How to Oder" section on the product page for further details about the procedure. Consult the Logiflex Colors and Finishes Guide for the colors and finishes offered. Unless indicated otherwise in the order, the PVC edge will match the color and finish specified.

Introduction

How to Use the Price List

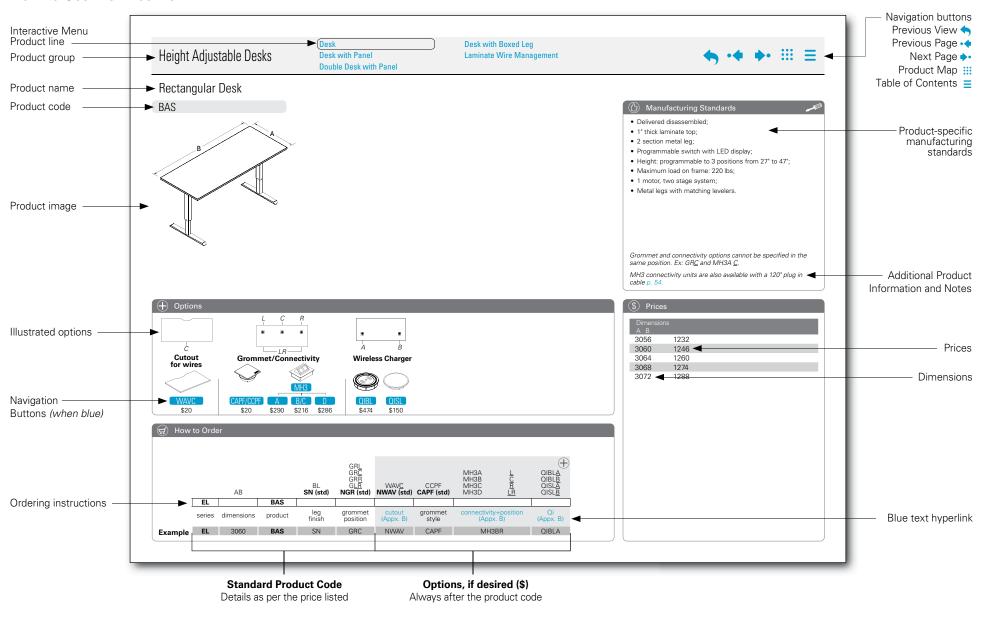

How to Order Double Desks

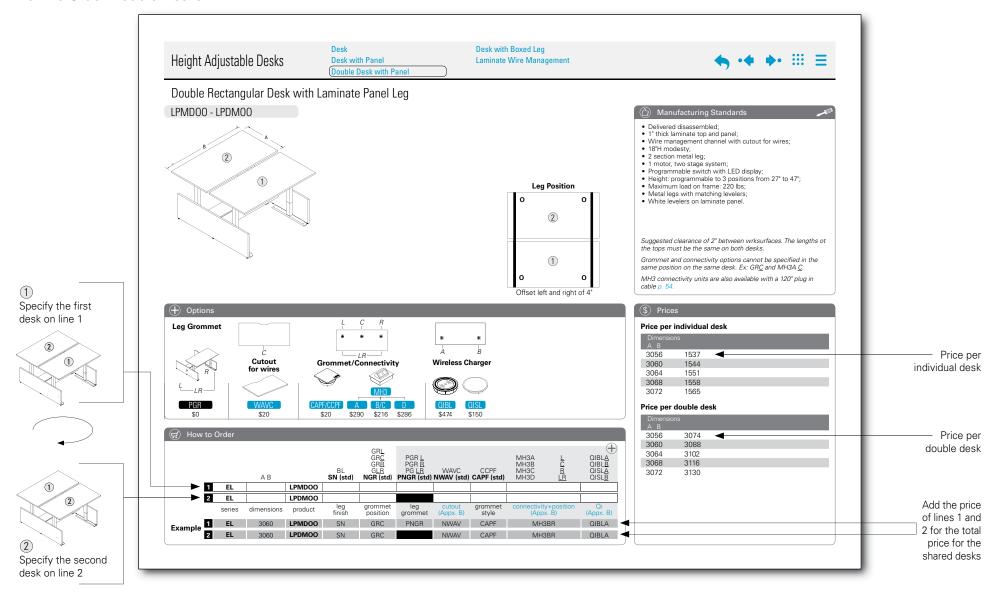

Appendix A: Colors and Finishes

How to specify your laminate colors Top Surface / Edge W/W Base Surface / Edge W/W Top Surface / Edge W/W Top Surface / Edge W/W Front Surface / Edge W/W Base Surface / Edge W/W Surface Edge

Availablility Chart

			HG Fronts <i>Façades</i> <i>lustrées</i>	Surf	aces	Mou 1-5	ldings Iures 5/8"	Knife Edge <i>Chanfrein</i>	Wood Components Composantes	Panval Code
	Code	Color <i>Couleur</i>	5/8"	1"	1-5/8"	MAR	MAX	Z	de bois	
ii.	GIA	Ginger Root Gingembre		•				•	S	H72
AURA Jish <i>Fi</i>	HAA	Haze Brume		•	•			•	Р	H57
AURA Finish <i>Fini</i>	STA	Storm Tempête		•	•			•	S	H58
i i i	TUA	Tundra		•				•	Р	H75
	AU	Audacity Audace		•	•			•	S	241
	В	Jet Black Noir intense**		•	•			•	Р	888 S405-CA
	BC	Brown cherry Cerisier brun		•	•		•	•	S	207
	C	Slate Ardoise**		•				•	Р	801
	CA	Caramel	CAH*	•	•			•	S	G18 G18-GL
	CH	Cherry Cerisier		•	•	•	•	•	S	965
	CO	Cognac		•	•	•	•	•	S	260
	DL	Legno Dark <i>Legno foncé</i>		•	•			•	S	G52
	DR	Driftwood Bois de rive		•	•		•	•	S	744
	FI	Finesse		•				•	S	745
	G	Mink Grey Gris vison		•	•			•	Р	805 OU-927
IITE Fini	GG	Grigio	GGH*	•	•			•	Р	G17 G17-GL
DOLOMITE Finish <i>Fini</i>	LL	Legno Light Legno pâle		•				•	S	G51
DOI :	LM	Light Maple <i>Érable clair</i>		•	•		•	•	S	992
	NC	Natural Cherry Cerisier naturel		•	•	•	•	•	S	239
	NM	Natural Maple Érable naturel		•	•	•	•	•	S	206
	PC	Coastal Pear Poirier de la côte	PCH*	•				•	Р	G23 G23-GL
	P0	Porto		•	•	•	•	•	S	913 OU-648
	SW	Smoked Walnut Noyer fumé		•	•		•	•	S	G21
	Т	Tan		•	•	•	•	•	S	259
	TO	Tobacco		•	•		•	•	S	205
	VA	Vanilla		•	•		•	•	Р	G22
	W	Polar White Blanc polaire	W-H*	•	•			•	Р	555 459-58 459-90
	WK	Whisky		•	•	•	•	•	S	245
	Z	Zebra		•	•	•	•	•	S	237

[P] Solid color painted wood | [S] Stained wood.


Colors may vary from 2% to 5% between tfl and hpl laminates due to different technical applications.


See our complete Colors & Finishes Guide


^{*} Non recommended color for work surfaces. An upcharge applies on high gloss fronts.


^{*} Non recommended color for work surfaces.

Appendix B: Grommet and Communication Box

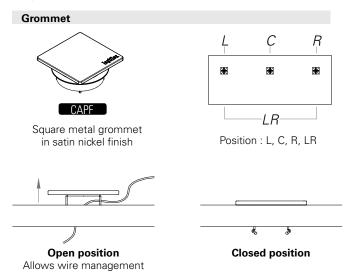

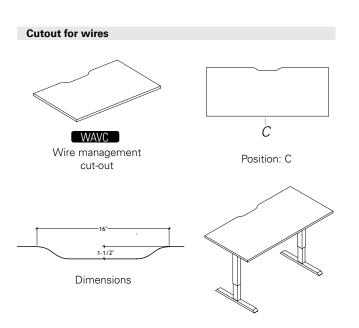


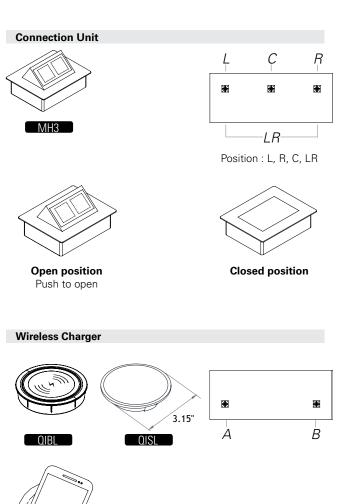

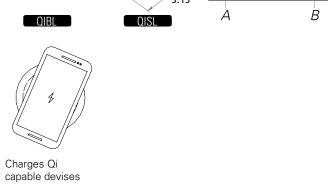


Appendix C: Modesty Panel


Modesty Height

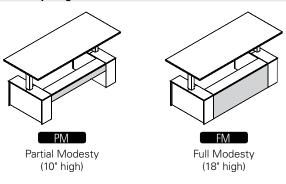

Appendix D: Wood Grain


Wood grain runs lengthwise on desk surfaces. Vertical wood grain on doors and legs. See adjacent image for wood grain direction placements.





Appendix E: Drawer Option

The drawer option is offered on the 12" boxed legs. The drawer dimensions are $8" \times 11-3/8" \times 3-3/4"H$.

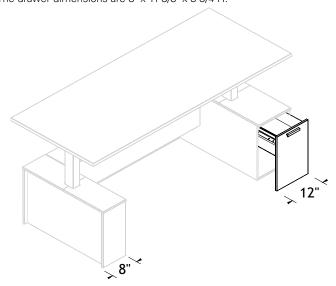


Appendix E: Calculation and Use of Electrical Components

STEP 2: Calculating the Total Amperes Per Electrical Series


Add the Amperes

Add the number of amps for each machine in the series. In our example, there are 4 CPUs at 2.5A per computer, 4 monitors at 0.5A and one printer at 9A.



The total number of amperes used in this example equals to 21A.


Divide by 16

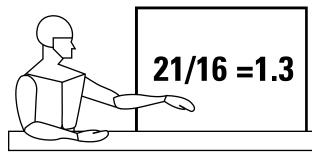


Most machines and computers used in offices or schools are used continuously for many hours at a time. In this type of situation, national electrical codes usually limit circuits to 16 amperes of continuous use. You must therefore divide the total number of amperes calculated by 16.

STEP 3: Determing How Many Circuits You Need


In most cases, this number will contain decimals. Round up to the next whole number, and this will be the number of circuits required for your equipment to run safely. If the number obtained is higher than 4 (the maximum number of circuits for a system), you must reduce the amount of current used by the system or create another system supplied by a separate power source. Continuing with our example, the 1.3A is rounded up to 2A.

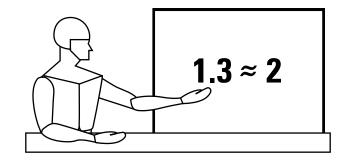


Here is one possible configuration. Using 5 power blocks joined together with junction cables, only 2 circuits are being used. The 4 monitors and the printer are on Circuit #1 and the 4 CPUs are on Circuit #3 (which is the grounded circuit).

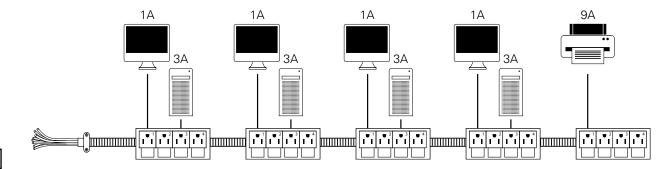


Appendix E: Calculation and Use of Electrical Components

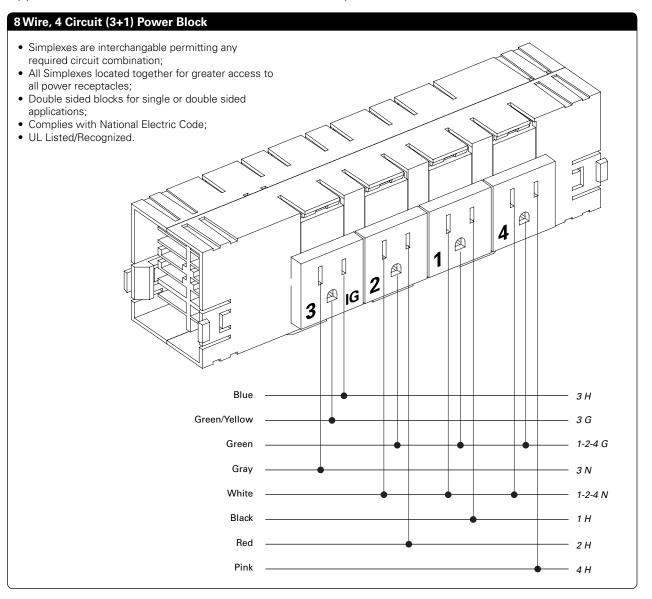


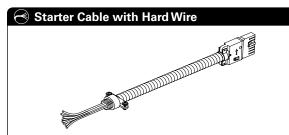


- 4 circuit starter cable with hard wire at one end;
- All circuits rated for 20 AMP;
- Available in lengths from 12' to 120";
- Whip end to be connected to building power by an electrican.

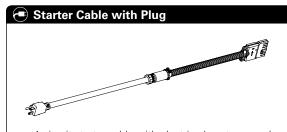

- 1 circuit starter cable with electric plug at one end;
- Circuit rated for 20 AMP;
- Available in lengths from 12' to 120".

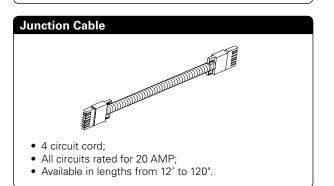

Appendix F: Calculation and Use of Electrical Components



An Introduction to Calculation and Use of Electrical Components

Most people are uncomfortable with anything related to electricity. This step-by-step guide is intended for people who are not familiar with electrical installations but who have to specify what system they need when ordering furniture. In this guide, you will learn how to choose and specify the electrical components required for your projects. The list that follows illustrates and identifies each product and describes its applications.

The electrical components are all recognized by the Underwriters Laboratory (UL) as office furniture accessories and are manufactured according to Canadian Standards Association (CSA) and UL electrical standards.

Note: All electrical connections must be performed by a certified electrician

By following these 3 simple steps, you can easily determine the number of circuits required to ensure safe use of your electrical equipment.

- 1. Determing the Number of Amperes Required
- 2. Calculating the Total Amperes Per Electrical Series
- 3. Determing How Many Circuits You Need

STEP 1: Determing the Number of Amperes Required

What is Amperage

An Ampere (Amp or A) is a unit for measuring the rate at which electric current flows. All electrical equipment has an amperage rate. By following these few simple steps, you can easily determine the number of circuits required to ensure safe use of your electrical equipment.


Determine the Number of Amperes Required

On your computer or other electric devices (ie: monitor, central processing unit, printer) find the plate that provides the technical specifications as follows:

Input: 120V - 1.8A.

If you cannot locate this information on the machine, you will probably find it in the user manual.

Here are a few examples of how many Amps some equipment may consume. Please note that these are examples and the number of amperes may vary from one machine to another.

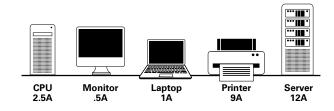

Power Block and Simplex Capacity

An electrical series corresponds to the total number of amperes that use the same power source. This includes electrical components such as computers, printers, laptops, monitors, server or other devices.


Each power block has a total capacity of 8 Simplex units (plugs). A Simplex can handle up to 20 amps by itself, however as the number of Simplex are added to each circuit, the amount of amps is divided between them.



A single Simplex has a maximum capacity of 20A




Each power block can hold 8 Simplex




A single power block has a maximum capacity of 80A

20A + 20A + 20A + 20A = 80A



A power block with the same circuit Simplex on both sides also has a maximum capacity of 20A


10A + 10A = 20A



The capacity of each Simplex on the same circuit is divided as additional Simplex's are added on. For example,

5 Simplex on the same circuit still holds the same 20A capacity.


Appendix G: Electrical Wire Management Solutions

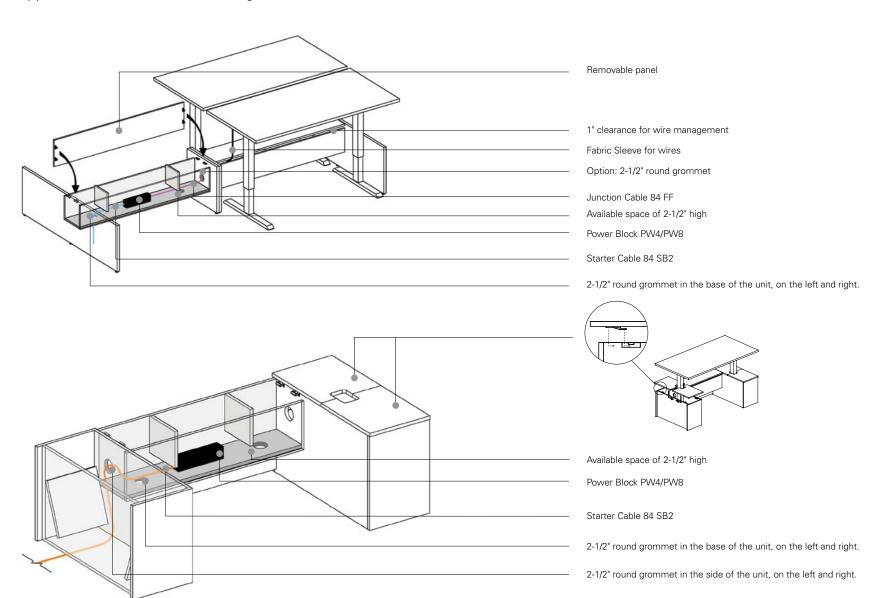


Introduction

Appendix H: Storage under worksurface

Only low pedestals at 19"H and less can be positioned under height ajustable surfaces (to clear the mechanism).

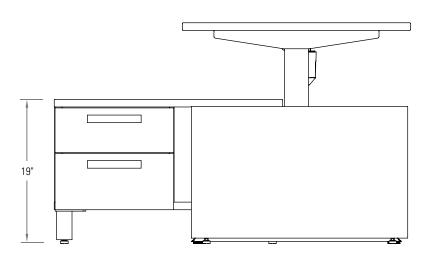

Pedestals that are higher than 19"H can not be positioned under height adjustable surfaces (collision with the mechanism).

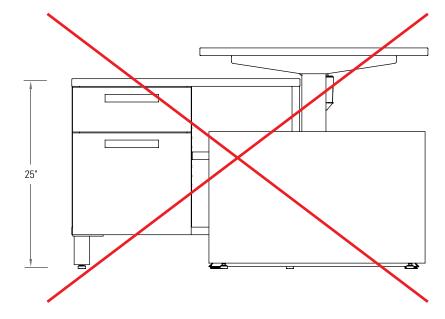



Appendix I: Divider Screens

Under Mount Clip Applications


Code Definitions


Clip	Insertion	Position	Illustration
	A Acrylic (C1) 1/4"	S Surface	
	(C2) 3/8"		
U	M	C Centered	
Under Mount	Laminate 5/8"	M Modesty	
		iviouesty	I
	B Tackboard 7/8" (+/- 1/8")	HS Desk Hutch	














Surface Mount Clip Applications

Code Definitions

Clip	Insertion	Position	Illustration
	A Acrylic (C1) 1/4" (C2) 3/8"	S Surface	
S Surface Mount	M Laminate 5/8"		
	B Tackboard 7/8" (+/- 1/8")	HP Storage Hutch	








^{*}Note: When ordering a divider screen that is between two metal legs, the total length is 4" shorter than the length of the desk surface because of the width of the legs.

Rectangular Desk












- · Delivered disassembled;
- 1" thick laminate top;
- · 2 section metal leg;
- · Programmable switch with LED display;
- Height: programmable to 3 positions from 27" to 47";
- · Maximum load on frame: 220 lbs;
- 1 motor, two stage system;
- · Metal legs with matching levelers.

Grommet and connectivity options cannot be specified in the same position. Ex: GRC and MH3A C.

MH3 connectivity units are also available with a 120" plug in cable p. 55.

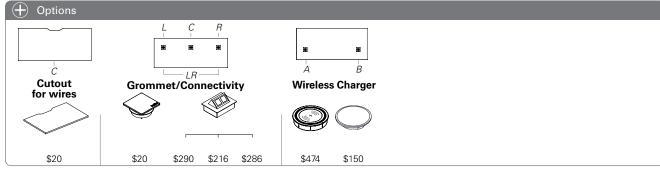


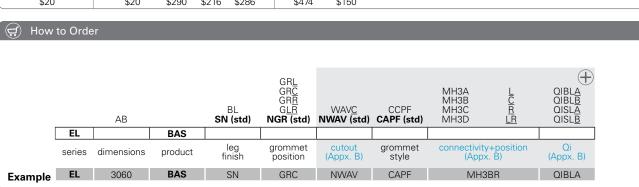

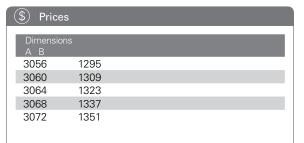

Rectangular Desk with Laminate Panel Leg

LPS00

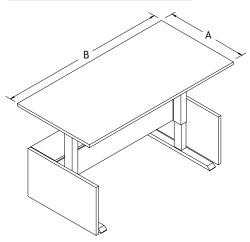

Leg Position O O


Offset left and right of 4"

Manufacturing Standards


- · Delivered disassembled;
- 1" thick laminate top and panel;
- Wire management channel with cutout for wires;
- 18"H modesty;
- 2 section metal leg;
- Programmable switch with LED display;
- Height: programmable to 3 positions from 27" to 47";
- · Maximum load on frame: 220 lbs;
- 1 motor, two stage system;
- Metal legs with matching levelers;
- White levelers on laminate panel.

Grommet and connectivity options cannot be specified in the same position. Ex: $GR\underline{C}$ and $MH3A\underline{C}$.


MH3 connectivity units are also available with a 120" plug in cable p. 55.

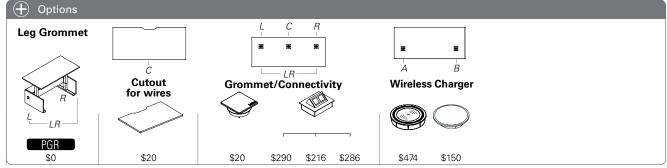


(How	to Order										
		AB		BL SN (std)	GRL GR <u>C</u> GR <u>R</u> G <u>LR</u> NGR (std)	PGR <u>L</u> PGR <u>R</u> PG <u>LR</u> PNGR (std)	WAVC NWAV (std)	CCPF CAPF (std)	MH3A MH3B MH3C MH3D	L C R LR	QIBLA QIBLB QISLA QISLB
	EL		LPSOO								
	series	dimensions	product	leg finish	grommet position	leg grommet	cutout (Appx. B)	grommet style	connectivity (Appx		Qi (Appx. B)
Example	EL	3060	LPS00	SN	GRC	PNGR	NWAV	CAPF	MH3	BR	QIBLA

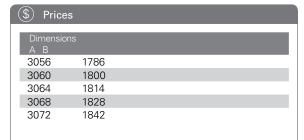


Rectangular Desk with Laminate Panel Leg

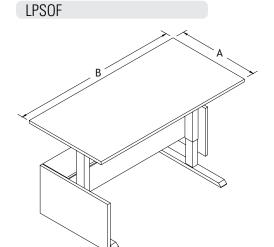





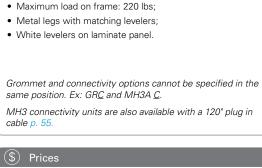

Manufacturing Standards


· Programmable switch with LED display;


• Wire management channel with cutout for wires;


• Height: programmable to 3 positions from 27" to 47";

· Delivered disassembled; • 1" thick laminate top and panel;


• 18"H modesty; 2 section metal leg; • 1 motor, two stage system;

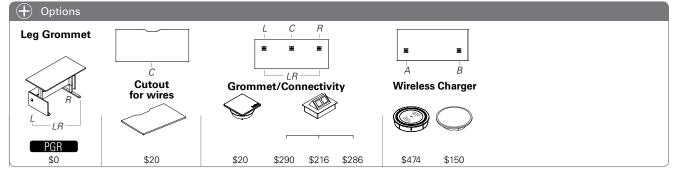


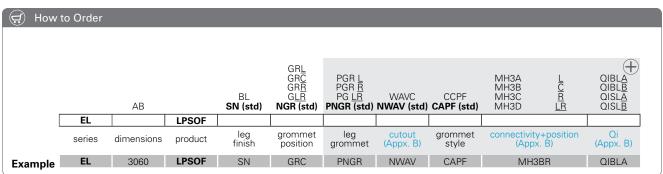

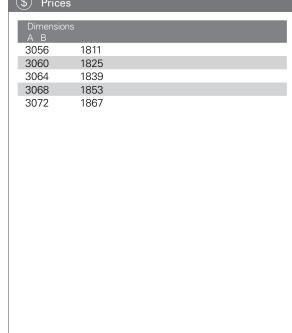



Rectangular Desk with Laminate Panel Leg

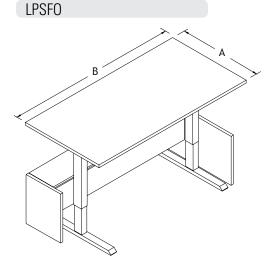



Flush left / Offset right of 4"

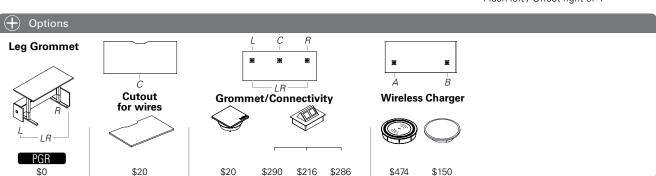

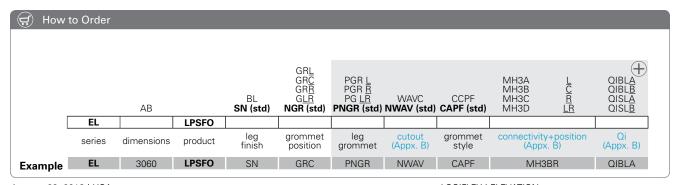


(1) Manufacturing Standards


- · Delivered disassembled;
- 1" thick laminate top and panel;
- Wire management channel with cutout for wires;
- 18"H modesty;
- 2 section metal leg;
- 1 motor, two stage system;
- · Programmable switch with LED display;
- Height: programmable to 3 positions from 27" to 47";
- · Maximum load on frame: 220 lbs;
- · Metal legs with matching levelers;
- White levelers on laminate panel.

Grommet and connectivity options cannot be specified in the same position. Ex: $GR\underline{C}$ and $MH3A\underline{C}$.

MH3 connectivity units are also available with a 120" plug in cable p. 55.

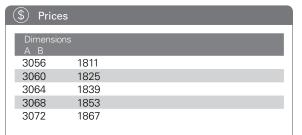

Rectangular Desk with Laminate Panel Leg

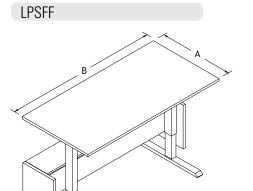






Flush left and right


Manufacturing Standards


- · Delivered disassembled;
- 1" thick laminate top and panel;
- Wire management channel with cutout for wires;
- 18"H modesty;
- 2 section metal leg;
- 1 motor, two stage system;
- · Programmable switch with LED display;
- Height: programmable to 3 positions from 27" to 47";
- · Maximum load on frame: 220 lbs;
- · Metal legs with matching levelers;
- · White levelers on laminate panel.

Grommet and connectivity options cannot be specified in the same position. Ex: $GR\underline{C}$ and $MH3A\underline{C}$.

MH3 connectivity units are also available with a 120" plug in cable p. 55.

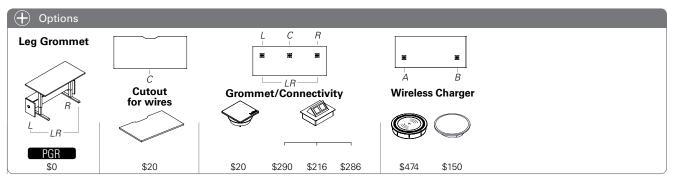


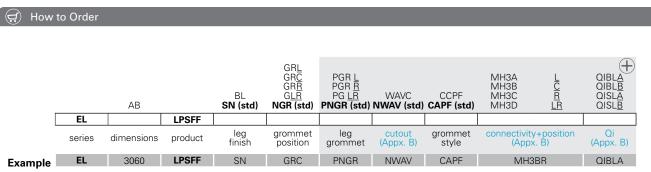

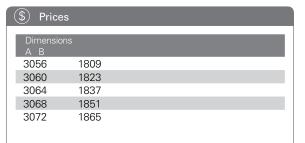


Double Rectangular Desk with Laminate Panel Leg

LPMD00 - LPDM00



Leg Position



Offset left and right of 4"


Manufacturing Standards


- · Delivered disassembled;
- 1" thick laminate top and panel;
- · Wire management channel with cutout for wires;
- 18"H modesty;
- 2 section metal leg;
- 1 motor, two stage system;
- Programmable switch with LED display;
- Height: programmable to 3 positions from 27" to 47";
- · Maximum load on frame: 220 lbs;
- · Metal legs with matching levelers;
- White levelers on laminate panel.

Suggested clearance of 2" between wrksurfaces. The lengths ot the tops must be the same on both desks.

Grommet and connectivity options cannot be specified in the same position on the same desk. Ex: $GR\underline{C}$ and $MH3A\underline{C}$.

MH3 connectivity units are also available with a 120" plug in cable p. 55.

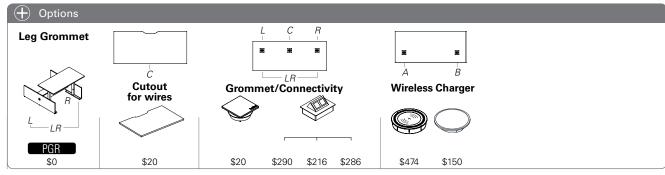

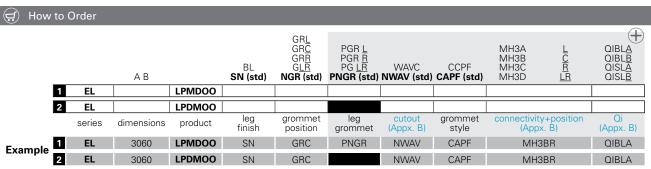

\$\ \text{Prices}\$ Price per individual desk Dimensions


Dimensions A B	
3056	1613
3060	1620
3064	1627
3068	1634
3072	1641

Price per double desk


Dimension A B	ons	
3056	3226	
3060	3240	
3064	3254	
3068	3268	
3072	3282	

Double Rectangular Desk with Laminate Panel Leg

LPMDOF - LPDMFO

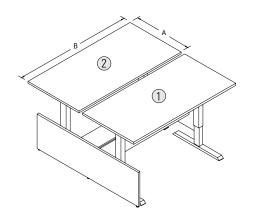

Leg Position



Offset left of 4" / Flush right


Manufacturing Standards


- · Delivered disassembled;
- 1" thick laminate top and panel;
- · Wire management channel with cutout for wires;
- 18"H modesty;
- 2 section metal leg;
- 1 motor, two stage system;
- Programmable switch with LED display;
- Height: programmable to 3 positions from 27" to 47";
- Maximum load on frame: 220 lbs;
- · Metal legs with matching levelers;
- White levelers on laminate panel.

Suggested clearance of 2" between wrksurfaces. The lengths ot the tops must be the same on both desks.

Grommet and connectivity options cannot be specified in the same position on the same desk. Ex: GRC and MH3A C.

MH3 connectivity units are also available with a 120" plug in cable p. 55.

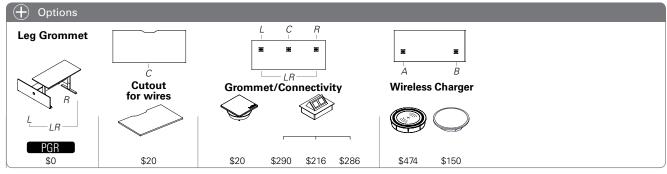

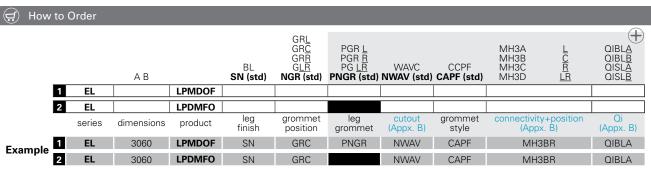


Price per individual desk <u>Dimensions</u> 3056 1624 3060 1631 3064 1638 3068 1645 3072 1652

Price per double desk


Dimensio A B		
3056	3248	
3060	3262	
3064	3276	
3068	3290	
3072	3304	

Double Rectangular Desk with Laminate Panel Leg

LPMDFO - LPDMOF



Leg Position



Flush left / Offset right of 4"


Manufacturing Standards


- · Delivered disassembled;
- 1" thick laminate top and panel;
- · Wire management channel with cutout for wires;
- 18"H modesty;
- 2 section metal leg;
- 1 motor, two stage system;
- Programmable switch with LED display;
- Height: programmable to 3 positions from 27" to 47";
- Maximum load on frame: 220 lbs;
- · Metal legs with matching levelers;
- White levelers on laminate panel.

Suggested clearance of 2" between wrksurfaces. The lengths ot the tops must be the same on both desks.

Grommet and connectivity options cannot be specified in the same position on the same desk. Ex: GRC and MH3A C.

MH3 connectivity units are also available with a 120" plug in cable p. 55.

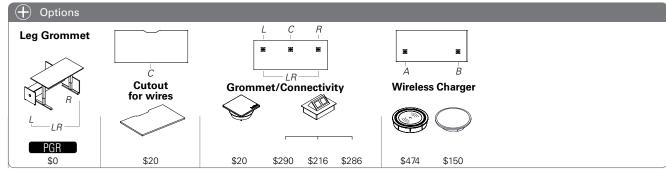

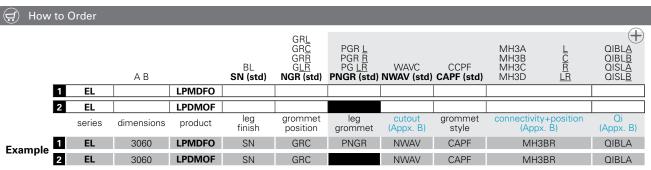


Price per individual desk <u>Dimensions</u> 3056 1624 3060 1631 3064 1638 3068 1645 3072 1652 Price per double desk


Dimensio A B	ns	
3056	3248	
3060	3262	
3064	3276	
3068	3290	
3072	3304	

Double Rectangular Desk with Laminate Panel Leg

LPMDFF - LPDMFF



Leg Position



Flush left and right


Manufacturing Standards


- · Delivered disassembled;
- 1" thick laminate top and panel;
- · Wire management channel with cutout for wires;
- 18"H modesty;
- 2 section metal leg;
- 1 motor, two stage system;
- Programmable switch with LED display;
- Height: programmable to 3 positions from 27" to 47";
- · Maximum load on frame: 220 lbs;
- · Metal legs with matching levelers;
- White levelers on laminate panel.

Suggested clearance of 2" between wrksurfaces. The lengths ot the tops must be the same on both desks.

Grommet and connectivity options cannot be specified in the same position on the same desk. Ex: GRC and MH3A C.

MH3 connectivity units are also available with a 120" plug in cable p. 55.

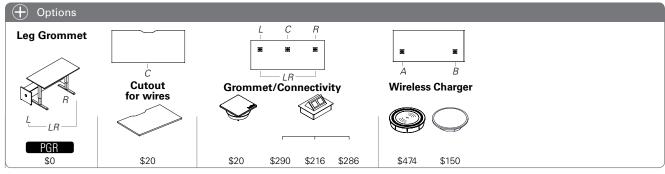

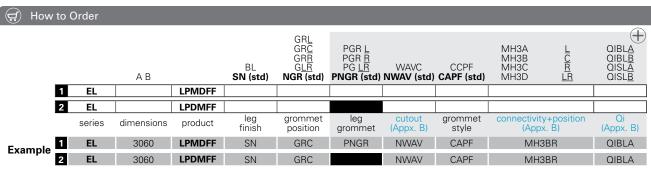


Price per individual desk <u>Dimensions</u> 3056 1591 3060 1598 3064 1605 3068 1612 3072 1619


Price per double desk

Dimensio A B	ns	
3056	3182	
3060	3196	
3064	3210	
3068	3224	
3072	3238	

Rectangular Desk with Laminate Boxed Leg

LBS00





Offset left and right of 4"


Manufacturing Standards


- Delivered disassembled;
- 1" thick laminate top and panel;
- · Wire management channel with cutout for wires;
- 18"H modesty;
- 2 section metal leg;
- 1 motor, two stage system;
- Programmable switch with LED display;
- Height: programmable to 3 positions from 27" to 47";
- Maximum load on frame: 220 lbs;
- · Metal legs with matching levelers;


Modesty: If choice of modesty is not specified, the standard FM (18"H) will be used, PM (10"H) modesty is available at no extra charge.

Grommet and connectivity options cannot be specified in the same position. Ex: GRC and MH3A C.

MH3 connectivity units are also available with a 120" plug in cable p. 55.

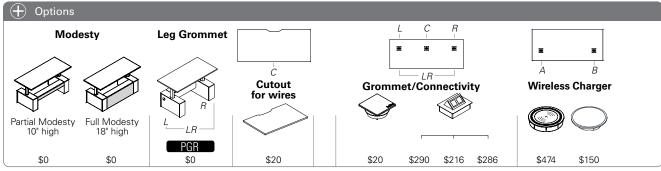


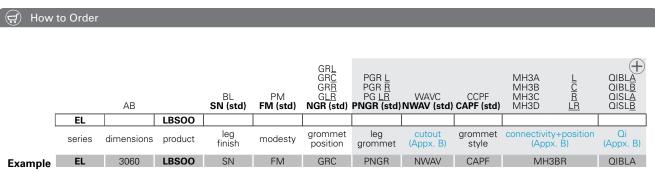


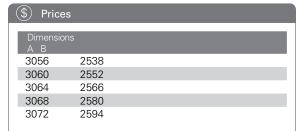


30


Rectangular Desk with Laminate Boxed Leg

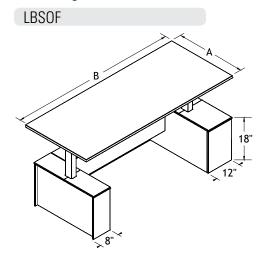



Offset left of 4" / Flush right

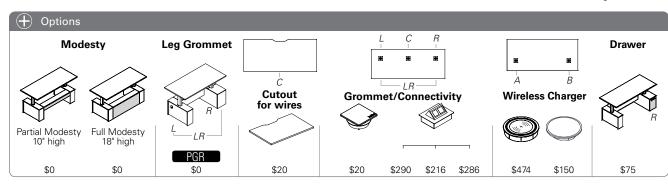

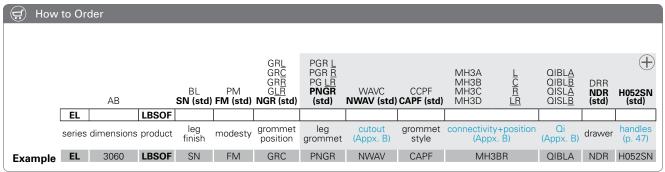

Manufacturing Standards · Delivered disassembled; • 1" thick laminate top and panel; · Wire management channel with cutout for wires; • 18"H modesty;


- · 2 section metal leg;
- 1 motor, two stage system;
- Programmable switch with LED display;
- Height: programmable to 3 positions from 27" to 47";
- Maximum load on frame: 220 lbs;
- Metal legs with matching levelers;

Drawer: The drawer option is only availabe on the flush boxed leg. For handles other than H052 standard, please choose from the Logiflex list at no extra charge p. 47.

Modesty: If choice of modesty is not specified, the standard FM (18"H) will be used, PM (10"H) modesty is available at no extra


Grommet and connectivity options cannot be specified in the same position. Ex: GRC and MH3A C.

MH3 connectivity units are also available with a 120" plug in cable p. 55.

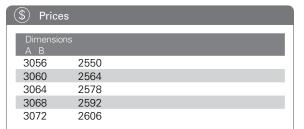

Rectangular Desk with Laminate Boxed Leg


LBSF0




Leg Position



Flush left / Offset right of 4"



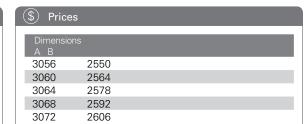

Manufacturing Standards

Programmable switch with LED display;

• Maximum load on frame: 220 lbs; • Metal legs with matching levelers;

the Logiflex list at no extra charge p. 47.

same position. Ex: GRC and MH3A C.

· Wire management channel with cutout for wires;

Height: programmable to 3 positions from 27" to 47";

Drawer: The drawer option is only availabe on the flush boxed leg. For handles other than H052 standard, please choose from

Modesty: If choice of modesty is not specified, the standard FM (18"H) will be used, PM (10"H) modesty is available at no extra


Grommet and connectivity options cannot be specified in the


MH3 connectivity units are also available with a 120" plug in

· Delivered disassembled; • 1" thick laminate top and panel;

• 18"H modesty; · 2 section metal leg; • 1 motor, two stage system;


cable p. 55.

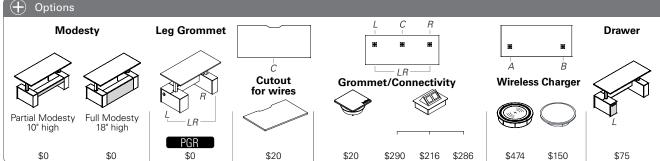


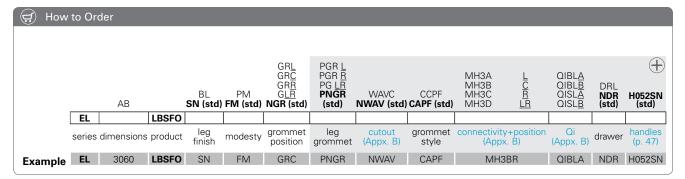


Rectangular Desk with Laminate Boxed Leg


LBSFF

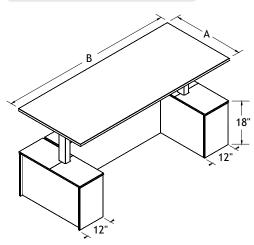



Flush left and right



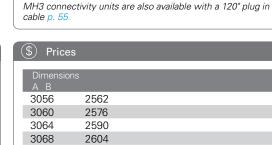

Manufacturing Standards

Programmable switch with LED display;

• Maximum load on frame: 220 lbs; • Metal legs with matching levelers;

the Logiflex list at no extra charge p. 47.

same position. Ex: GRC and MH3A C.

2618

· Wire management channel with cutout for wires;

Height: programmable to 3 positions from 27" to 47";

Drawer: The drawer option is only availabe on the flush boxed leg. For handles other than H052 standard, please choose from


Modesty: If choice of modesty is not specified, the standard FM (18"H) will be used, PM (10"H) modesty is available at no extra


Grommet and connectivity options cannot be specified in the

· Delivered disassembled; • 1" thick laminate top and panel;

• 18"H modesty; · 2 section metal leg; • 1 motor, two stage system;


3072

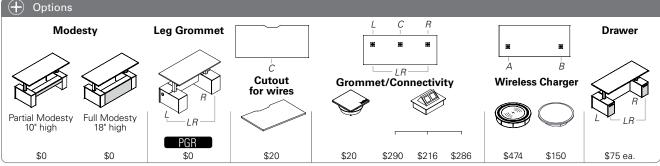

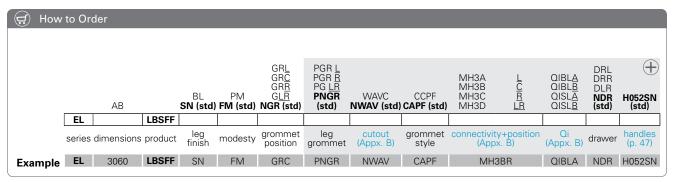


Laminate Wire Managment


LWM

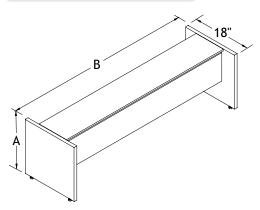





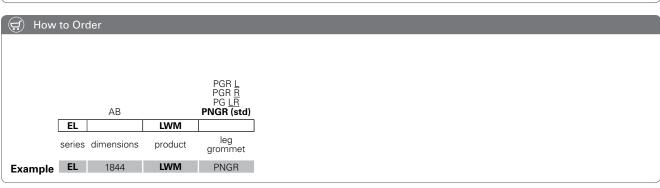

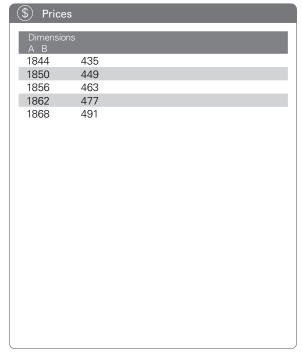


Divider Screens

Divider Screens

Acrylic

UAS






- Acrylic divider screen, frosted finish (PL), to be installed above a surface;
- 2 chrome-finish metal mounts for mounting under a surface.

C1: Acrylic 1/4"


C2: Acrylic 3/8"

Dimension "B" is 1/2" recessed.




How to Order	

	АВ			C1 C2	SN CHR (std)	PL (std)
	LV		UAS			
	series	dimensions	product	acrylic thickness	metal finish (Appx. A)	acrylic finish (Appx. A)
Example	LV	1572	UAS	C1	CHR	PL

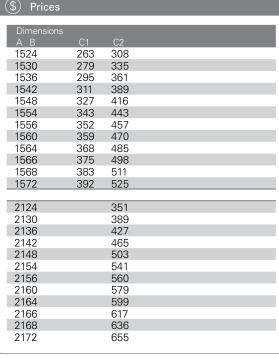

Acrylic

UAC






- Acrylic divider screen, frosted finish (PL), to position in front of the surface;
- 2 chrome-finish metal mounts for mounting under a surface.

*Screen height above surface: 24"H = 13" / 26"H = 15"

C1: Acrylic 1/4"

C2: Acrylic 3/8"

Dimension "B" is 1/2" recessed.



How to Order


	АВ			C1 C2	SN CHR (std)	PL (std)
	LV		UAC			
	series	dimensions	product	acrylic thickness		acrylic finish (Appx. A)
Example	LV	2672	UAC	C1	CHR	PL


Dimensions A B

How to Order

Acrylic

UAM





A B C1 SN CHR (std) PL (std) LV UAM series dimensions product acrylic thickness (Appx. A) (Appx. A) Example LV 1072 UAM C1 CHR PL

Manufacturing Standards

- Acrylic divider screen, frosted finish (PL), to be installed under a surface;
- 2 chrome-finish metal mounts for mounting under a surface.

C1: Acrylic 1/4"


C2: Acrylic 3/8"


Dimension "B" is 1/2" recessed.

Note: When ordering a divider screen that is between two metal legs, the total length is 4" shorter than the length of the desk surface because of the width of the legs.

Acrylic

SAS



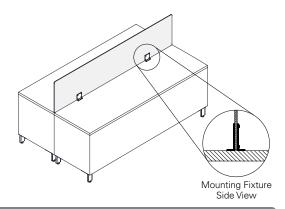

SN CHR (std) C1 C2 PL (std) ΑВ LV SAS metal finish acrylic finish (Appx. A) acrylic thickness series dimensions product Example LV 1572 CHR PL

Manufacturing Standards


- Acrylic divider screen, frosted finish (PL), to be installed above a surface;
- 2 chrome-finish metal mounts for mounting on a surface.

C1: Acrylic 1/4" C2: Acrylic 3/8"

(\$) Prices			
111003			
Dimensions			
АВ	C1	C2	
1524	270	315	
1530	287	342	
1536	302	369	
1542	318	396	
1548	334	423	
1554	351	450	
1556	359	464	
1560	366	478	
1564	375	491	
1566	382	505	
1568	391	519	
1572	398	532	
2124		358	
2130		396	
2136		435	
2142		473	
2148		510	
2154		548	
2156		567	
2160		586	
2164		606	
2166		625	
2168		644	
2172		663	


Laminate


UMS




Manufacturing Standards

- 5/8" laminate divider screen to be installed above a surface;
- 2 chrome-finish metal mounts for mounting under a surface.






		АВ		SN CHR (std)
	LV		UMS	
	series	dimensions	product	metal finish (Appx. A)
Example	LV	1572	UMS	CHR

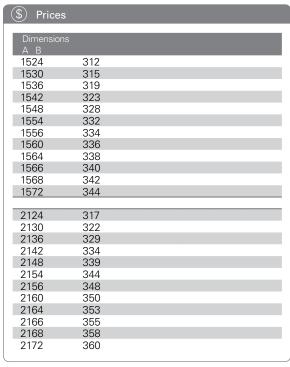


Laminate

How to Order

UMM





A B CHR (std) LV UMM series dimensions product metal finish (Appx. A) Example LV 1072 UMM CHR

Manufacturing Standards

- 5/8" laminate divider screen to be installed under a surface;
- 2 chrome-finish metal mounts for mounting under a surface.


Dimension "B" is 1/2" recessed.


Note: When ordering a divider screen that is between two metal legs, the total length is 4" shorter than the length of the desk surface because of the width of the legs.



Laminate

SMS



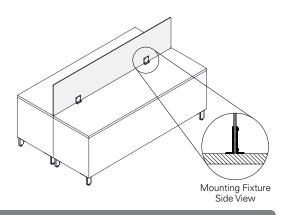

A B CHR (std)

LV SMS

series dimensions product metal finish (Appx. A)

Example LV 1572 SMS CHR


Manufacturing Standards

- 5/8" laminate divider screen to be installed above a surface;
- 2 chrome-finish metal mounts for mounting on a surface.

(\$) Prices		
Dimensions		Ī
A B		l
1524	319	
1530	323	
1536	328	
1542	332	
1548	336	
1554	340	
1556	342	
1560	344	
1564	347	
1566	349	
1568	351	
1572	353	
2124	326	
2130	331	
2136	336	
2142	342	
2148	348	
2154	353	
2156	356	
2160	358	ı
2164	361	
2166	363	ı
2168	366	
2172	369	
		_


Tackboards


UBS





- 7/8" thick tackboard covered with fabric to be installed above a surface;
- 2 chrome-finish metal mounts for mounting under a surface.




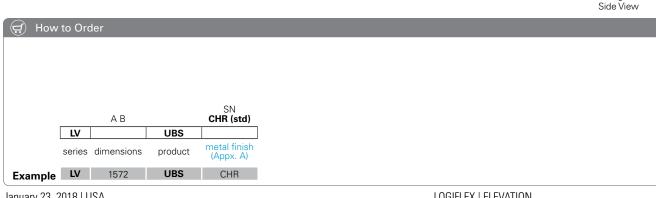




Tackboards

UBC





How to Order

		АВ		SN CHR (std)
	LV		UBC	
	series	dimensions	product	metal finish (Appx. A)
Example	LV	2624	UBC	CHR

Manufacturing Standards

- 7/8" thick tackboard covered with fabric to position in front of the surface;
- 2 chrome-finish metal mounts for mounting on a surface.

*Screen height above surface: 24"H = 13" / 26"H = 15"

Dimension "B" is 1/2" recessed.


Applicable only on single desks.


Prices


Dimensio		0.00	0.00	05.	0.05	0.00
АВ	COM/GR1	GR2	GR3	GR4	GR5	GR6
2424	359	383	414	445	476	506
2430	376	406	444	483	521	560
2436	392	428	475	521	566	612
2442	408	452	505	559	612	666
2448	424	474	534	596	657	718
2454	441	496	565	634	702	772
2456	449	507	581	653	726	798
2460	457	519	595	672	749	824
2464	465	528	610	691	772	852
2466	474	541	625	710	794	878
2468	482	552	641	729	817	905
2472	490	564	655	748	839	931
2624	365	392	424	458	491	524
2630	382	416	458	499	541	582
2636	400	440	490	540	589	639
2642	418	464	523	581	638	697
2648	436	489	555	622	688	754
2654	454	513	588	663	737	812
2656	463	526	605	678	762	841
2660	471	538	621	704	786	869
2664	481	550	637	725	812	896
2666	489	562	653	744	836	927
2668	499	574	670	771	861	957
2672	507	586	686	785	885	985

Tackboards

SBS



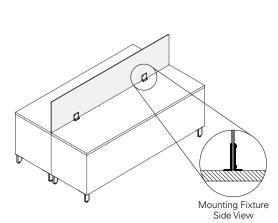

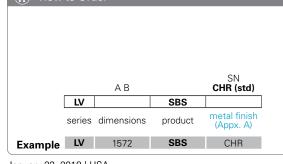

Manufacturing Standards

- 7/8" thick tackboard covered with fabric to be installed above a surface;
- 2 chrome-finish metal mounts for mounting on a surface.

\$ Price	S					
Dimension	าร					
АВ	COM/GR1	GR2	GR3	GR4	GR5	GR6
1524	339	355	374	393	412	432
1530	350	369	393	417	440	464
1536	360	383	412	440	469	498
1542	370	397	431	464	498	530
1548	380	411	449	487	526	564
1554	391	425	468	511	554	597
1556	396	433	478	523	569	611
1560	401	439	487	534	583	630
1564	406	446	497	539	597	647
1566	411	453	506	559	611	664
1568	416	460	516	571	626	680
1572	421	467	524	582	639	697

Handles

HJA

Handle



- 6" metal handle;
- 5-1/32" (128mm) center to center.

Code	\$	Description	
HJA	11	Satin Nickel	
HJAB	11	Black	

H030

Handle



- 1-1/2" metal handle;
- 5/8" (15.875mm) center to center.

Code	\$	Description	
H030	11	Satin Nickel	

H031



- 6-1/4" metal handle;
- 3-3/4" (95.25mm) center to center.

Code	\$	Description	
H031	11	Satin Nickel	

H051

Handle




- 3-5/32" metal handle;
- 2-17/32" (64mm) center to center.

1	Code	\$	Description
	H051CHR	11	Chrome
	H051PB	11	White
	H051SN	11	Satin Nickel

H052


Handle



- 7-1/32" metal handle;
- 6-9/32" (160mm) center to center.

Code		Description
H052CHR	11	Chrome
H052PB	11	White
H052SN	11	Satin Nickel

SXP003




- 5-1/8" metal handle;
- 3-25/32" (96mm) center to center.

Code	\$	Description	
SXP003	11	Satin Nickel	

Keyboard Trays

KB360M

Keyboard Tray




- Black plastic 24-1/2"wide retractable ergonomic keyboard;
- Lift-N-Lock spring system (no lever) to adjust height;
- Handle for easy tilt adjustment from 10" to 15";
- 10" x 7-1/2" mouse tray;
- 19" black gel wrist rest;
- 360° rotation.

Code	\$	Description
KB360M	467	

CPU Holders

MCPU50

Miniature CPU Holder




- Height adjustable: 8" 14";
- Width adjustable: 2" 4";
- Maximum capacity: 10 kg (22 lbs);
- Need a minimum 5" deep clearance.

Code	\$	Description
MCPU50	130	

MCPU90

CPU Holder




- Black metal CPU holder;
- · Easy manipulation;
- Vertical adjustment:
 - Height: 15.5" x 20"
 - Width: 5.5" x 9.8"
- Horizontal adjustment:
 - Height: 17.5" x 22"
 - -Width: 9.25" x 13.5"

Code		Description
MCPU90	165	per unit

Miscellaneous Accessories

AP

Wrist Rest




• Black gel wrist rest.

Code	\$	Description	
AP	56		

TCPM3

Drawer




- Plastic sliding drawer;
- Finish: White and black;
- Need a minimum 10 1/2" deep clearance.

Code	\$	Description
TCPM3BL	225	Black
TCPM3WH	225	White

Electrical Accessories

WM41

Power and Data Cable Support




- 18.5", 32.5" or 44.5" metal wire management system with power block;
- 1 circuit power block with 4 Simplex included.
 (Maximum of 4 power blocks can be joined together);
- · Metal mounting plate included;
- J-Channel to isolate data cables from power cables;
- 2 telecom plate cutouts. (Telecom plates not included);
- · Satin nickel finish.

)	Code	А	\$	Description
	WM41	18	280	Length: 18.5", 4 Simplex, 1 circuit
	WM41	32	285	Length: 32.5", 4 Simplex, 1 circuit
	WM41	44	300	Length: 44.5", 4 Simplex, 1 circuit

To be used with starter cable 8420AP1

WM81

Power and Data Cable Support



- 18.5", 32.5" or 44.5" metal wire management system with power block;
- 1 circuit power block with 8 Simplex included. (Maximum of 2 power blocks can be joined together);
- · Metal mounting plate included;
- J-Channel to isolate data cables from power cables;
- 2 telecom plate cutouts. (Telecom plates not included);
- Satin nickel finish.


	$\overline{}$	
	_/	
_	(
_	_ /	

)	Code	А	\$	Description
	WM81	18	330	Length: 18.5", 8 Simplex, 1 circuit
	WM81	32	375	Length: 32.5", 8 Simplex, 1 circuit
	WM81	44	380	Length: 44.5", 8 Simplex, 1 circuit

To be used with starter cable 8420AP1

WM44

Power and Data Cable Support




- 18.5", 32.5" or 44.5" metal wire management system with power block;
- 4 circuit power block with 4 Simplex included.
 (Maximum of 10 power blocks can be joined together);
- Mounting plate included;
- J-Channel to isolate data cables from power cables;
- 2 telecom plate cutouts. (Telecom plates not included);
- · Satin nickel finish.

(Code A	4	\$	Description
	WM44 18	8	290	Length: 18.5", 4 Simplex, 4 circuits
	WM44 32	2	315	Length: 32.5", 4 Simplex, 4 circuits
	WM44 4	4	330	Length: 44.5", 4 Simplex, 4 circuits

To be used with starter cable 84SB2 (to be connected to an electrical box by an electrician).

WM84

Power and Data Cable Support



- 18.5", 32.5" or 44.5" metal wire management system with power block;
- 4 circuit power block with 8 Simplex included. (Maximum of 5 power blocks can be joined together);
- · Mounting plate included;
- J-Channel to isolate data cables from power cables;
- 2 telecom plate cutouts. (Telecom plates not included);
- Satin nickel finish.




Code A	\$	Description
WM84 18	350	Length: 18.5", 8 Simplex, 4 circuits
WM84 32	400	Length: 32.5", 8 Simplex, 4 circuits
WM84 44	405	Length: 44.5", 8 Simplex, 4 circuits

To be used with starter cable 84SB2 (to be connected to an electrical box by an electrician).

Electrical Accessories

PW41

Mounting Bracket with Power Block



- · Metal mounting kit assembly included;
- 1 circuit power block with 4 Simplex included. (Maximum of 4 power blocks can be joined together).




)	Code	Α	\$	Description
_	PW41		200	4 Simplex, 1 circuit

To be used with starter cable 8420AP1

SMWM

Cable Support




- 3.5" metal wire support with 1 telecom plate cutout;
- · Satin nickel finish.

· Grey telecom plate.

Code	\$	Description	
SMWM	22		

PW44

Mounting Bracket with Power Block



- · Metal mounting kit assembly included;
- 4 circuit power block with 4 Simplex included. (Maximum of 10 power blocks can be joined together).



Code	Α	\$	Description
PW44		220	4 Simplex, 4 circuits

• Metal mounting kit assembly included; • 1 circuit power block with 8 Simplex included.


To be used with starter cable 84SB2 (to be connected to an electrical box by an electrician).

(Maximum of 2 power blocks can be joined together).

240 8 Simplex, 1 circuit

TEL

Telecom Plate



Code TELA 17 Blank plate TELB CAT6 data / USB / CAT3 phone TELC 147 (2) CAT6 data

(4) CAT6 data




277



TELA

TELD

TELB



TELC



PW81

Mounting Bracket with Power Block

Mounting Bracket with Power Block



· Metal mounting kit assembly included;

To be used with starter cable 8420AP1

• 4 circuit power block with 8 Simplex included. (Maximum of 5 power blocks can be joined together).



PW81

Code	Α	\$	Description
PW84		290	8 Simplex, 4 circuits

To be used with starter cable 84SB2 (to be connected to an electrical box by an electrician).

Electrical Accessories

84SB2

Starter Cable with Hardwire



- · Starter cable with hardwire at one end;
- Minimum 12" maximum 180".

()	Code	\$	Description
	84 SB2 72	144	8 wire 4 circuit - 72"
	84 SB2 84	159	8 wire 4 circuit - 84"
	84 SB2 96	175	8 wire 4 circuit - 96"
	84 SB2 108	190	8 wire 4 circuit - 108"
	84 SB2 120	206	8 wire 4 circuit - 120"

To be connected to an electrical box by an electrician.

8420AP1

Starter Cable with Plug




• 72" starter cable with electric plug at one end.

(==)	Code		Description
\bigcirc	84 20 AP1 48 24	180	8 wire 1 circuit - 72"

84SB1

NYC Starter Cable with Hardwire




- NYC Starter cable with hardwire at one end;
- Minimum 12" maximum 180".

(Code	\$	Description
	84 SB1 72	222	8 wire 4 circuit - 72"
	84 SB1 84	238	8 wire 4 circuit - 84"
	84 SB1 96	253	8 wire 4 circuit - 96"
	84 SB1 108	269	8 wire 4 circuit - 108"
	84 SB1 120	285	8 wire 4 circuit - 120"

To be connected to an electrical box by an electrician.

84FF

Junction Cable



• Minimum 12" - maximum 180".

Code	\$	Description
84 FF 12	92	8 wire / 4 circuit jumper cable 12"L
84 FF 18	99	8 wire / 4 circuit jumper cable 18"L
84 FF 24	106	8 wire / 4 circuit jumper cable 24"L
84 FF 30	109	8 wire / 4 circuit jumper cable 30"L
84 FF 36	113	8 wire / 4 circuit jumper cable 36"L
84 FF 42	121	8 wire / 4 circuit jumper cable 42"L
84 FF 48	129	8 wire / 4 circuit jumper cable 48"L
84 FF 54	136	8 wire / 4 circuit jumper cable 54"L
84 FF 60	145	8 wire / 4 circuit jumper cable 60'L
84 FF 66	152	8 wire / 4 circuit jumper cable 66"L
84 FF 72	160	8 wire / 4 circuit jumper cable 72"L
84 FF 78	168	8 wire / 4 circuit jumper cable 78"L
84 FF 84	176	8 wire / 4 circuit jumper cable 84"L
84 FF 96	191	8 wire / 4 circuit jumper cable 96"L
84 FF 108	207	8 wire / 4 circuit jumper cable 108"L
84 FF 120	223	8 wire / 4 circuit jumper cable 120"L
84 FF 132	238	8 wire / 4 circuit jumper cable 132"L
84 FF 144	252	8 wire / 4 circuit jumper cable 144"L
84 FF 156	257	8 wire / 4 circuit jumper cable 156"L
84 FF 168	281	8 wire / 4 circuit jumper cable 168"L
84 FF 180	296	8 wire / 4 circuit jumper cable 144"L
		·

83CMM

Rigid Junction



• Minimum 2" - maximum 12".

Code	\$	Description
83 CMM 02	76	8 wire 4 circuit M/M Rigid Channel - 2"L
83 CMM 06	81	8 wire 4 circuit M/M Rigid Channel - 6"L
83 CMM 12	91	8 wire 4 circuit M/M Rigid Channel - 12"L

84CFF

Rigid Junction



• Minimum 2" - maximum 12".

Code	\$	Description
84 CFF 02	72	8 wire 4 circuit F/F Rigid Channel - 2"L
84 CFF 06	77	8 wire 4 circuit F/F Rigid Channel - 6"L
84 CFF 12	85	8 wire 4 circuit F/F Rigid Channel - 12"L

Electrical Accessories

8SR


Simplex Removal Tool



Code	\$	Description
8SR	5	Simplex removal tool

844AA

Power Block



- Electri-Pak, 8 wire 4 circuit double-sided power block. Simplex ordered separately;
- "Y" conncector not required;
 4 ports: 1 input and up to 3 outputs;
- Max. 8 Simplex total per block.

Code	\$	Description
844AA	68	

84S

Circuit - electric plug




Simplex for 84 system.

Code	\$	Description
84 S1-BL-150	15	Circuit 1 - 20A
84 S2-BL-150	15	Circuit 2 - 20A
84 S3-BL-150	15	Circuit 3 - 20A
84 S4-BL-150	15	Circuit 4 - 20A
84 S3IG-OR-150	17	Circuit 3 isolated ground - 20A
84 SB-BL-150	7	Blank

KSUP844AA

Mounting Bracket Support Kit




- 844AA metal support bracket assembly kit to attach to the bottom of the laminate wire management modesty.
- Support in black and plate in satin nickel.

Code	\$	Description	
KSUP844AA	32		

PMDBRKTKIT

Bracket




• 844AA metal mounting bracket assembly and mounting plate included.

Code	\$	Description
PMD BRKT KIT	45	

WMS

Power and Data Cable Support



- 18.5", 32.5" or 44.5" metal power and data support for 844AA power block with 2 telecom plate cutouts;
- · Metal mounting plate included;
- J-Channel to isolate data cables from power cables;
- · Satin nickel finish.

Code			Description
WMS1	8	158	18.5" support
WMS3	2	208	32.5" support
WMS4	4	213	44.5" support

WM

Velcro Tie



- Velcro tie for electrical cable;
- The non-metallic buckle is safe to use around electrical devices;
- Dimensions: 3/4" x 10";
- · Color: black.

Code	\$	Description
WM	7	Unit price

Electrical Accessories

MH3A

Connectivity unit



- Retractable connectivity unit with 1 electrical outlet and 1 empty telecommunication outlet (outlet not included);
- 72" or 120" power cable with electric plug;
- · Finish: Satin Nickel.



1	Code	\$	Description
	MH3A	290	Satin Nickel, 72" power cable
	MH3A120	300	Satin Nickel, 120" power cable

MH3B

Connectivity unit



- Retractable connectivity unit with 1 audio jack and 1 electrical outlet;
- 72" or 120" power cable with electric plug;
- · Finish: Satin Nickel.



Code	\$	Description
МНЗВ	216	Satin Nickel, 72" power cable
MH3B120	226	Satin Nickel, 120" power cable

MH3C

Connectivity unit



- Retractable connectivity unit with 2 electrical outlets;
- 72" or 120" power cable with electric plug;
- Finish: Satin Nickel.



)	Code	\$	Description
	MH3C	216	Satin Nickel, 72" power cable
	MH3C120	226	Satin Nickel, 120" power cable

MH3D

Connectivity unit



- Retractable connectivity unit with 1 electrical outlet and 2 USB (chargers);
- 72" or 120" power cable with electric plug;
- · Finish: Satin Nickel.



Code	\$	Description
MH3D	286	Satin Nickel, 72" power cable
MH3D120	296	Satin Nickel, 120" power cable

POR 01

RJ45, CAT 6 connectivity port



- RJ45, CAT6 connector;
- RJ45 M/F cable 72";
- · Finish: Black.

Code	\$	Description
POR 01	105	

POR 02

RJ11 connectivity port



- RJ11 connector, 4 pin
- RJ11 M/F cable 84";
- · Finish: Black.

Code	\$	Description
POR 02	30	

POR 03

USB connectivity port



- 1 USB (data/passive);
- USB M/F cable 72";
- Finish: Black.

Code	\$	Description
POR 03	65	

POR 04

HDMI connectivity port



- HDMI connector;
- HDMI M/F cable 18";
- Finish: Black.

Code	\$	Description
POR 04	95	

POR 05

Mini Stereo Jack



- 3.5 mm Mini Stereo Jack, M/F;
- Audio M/F cable -120";
- · Finish: Black.

Code		Description	
POR 05	35		_

Electrical Accessories

POR 06

VGA Connector




- VGA connector, 15 pin;
- VGA M/F cable -120";
- Finish: Black.

Code	\$	Description
POR 06	120	

QIIP

Transmitter for iPhone



- Receiver for phones without Qi technology;
- · For wireless charge devices;
- Adapter for Apple lightning port.

Code	\$	Description
QIIP	85	

QIBL

Wireless Charger




- · Air charger wireless;
- Qi compatible device;
- 72" power cable with electric plug;
- Finish: Black.

_	_
<i>\(\)</i>	_/
ν.	_/

Code	\$	Description
QIBL	474	

QISL

Wireless Charger



- USB wireless air charger;
- · Qi compatible device;
- 60" power cable with electric plug;
- Finish: Silver.



Code	\$	Description
QISL	150	

QIRE

Qi Adapter




- Receiver to adapt devices not Qi compatible.
- Built-in connections for Apple 30 pin and lightning, Micro-USB.

Code	\$	Description
QIRE	130	

Electrical Accessories

COV1

Cove Unit



- 108" power cable with electric plug;
- · Satin nickel finish.

Code	\$	Description
COV1	442	1 power, 2 USB (chargers)

ELPF

Black Plastic Grommet





- Standard black plastic grommet with the Logiflex logo engraved;
- 2-1/2" diameter cutout.

Code	\$	Description
ELPF	6	Unit price

WF36-WF55

Fabric sleeve for wires



- Flexible Fabric Wire Organizer;
- 3" Diameter;
- · With zipper.



+	Code	GR1	GR2	GR3	GR4	GR5	GR6
	WF36	75	89	103	117	131	145
	WF55	142	158	175	192	210	227

CAPF/CCPF

Grommet






- Square metal grommet with the Logiflex logo engraved;
- Finish: Satin Nickel and Chrome;
- 2-1/2" diameter cutout.

Code	\$	Description
CAPF	20	Unit price - Satin Nickel
CCPF	20	Unit price - Chrome

PBL

Power bar



- · Power bar with 6 electric outlets;
- 120" power cable with electric plug.

$\overline{}$			
-= =	Code		Description
	PRI	19	

WM

Velcro Tie



- Velcro tie for electrical cable;
- The non-metallic buckle is safe to use around electrical devices;
- Dimensions: 3/4" x 10";
- · Color: black.

Code	\$	Description	ı
WM	7	Unit price	

As our product line is constantly evolving and expanding, we recommend that you visit logiflex. ca for updates.

1235 St-Roch N., Sherbrooke QC J1N 0H2 Canada T : 1.877.864.9323 | F : 1.800.474.7830 | logiflex.ca