

# SMART LIFT™ TABLE SYSTEM

## **PRICE LIST**

January 3, 2011 Updated October 3, 2022

800.424.2432

Contents
Refer to KI Terms & Conditions document or visit ki.com.



# Contents Refer to KI Terms & Conditions document or visit ki.com.

### Smart Lift®

General Information	
Product Color Options	
Worksurfaces - Poly Grommet/	PowerUp
Worksurfaces - Villa Metal Gror	mmet/Power Module
Accessories	
10-Wire/6 Circuit Beams	
Non-Powered Beams	
"C" Legs	
Electrical	
Rectangular Privacy Screens	
Stand Alone Privacy Screen	
Divider Screens	



Features	
Standard size cutout area	21"W x 6"D
Maximum monitor size	21"W x 19"H x 3.6"D

#### SMART LIFT CONSTRUCTION

#### Worksurfaces

Horizontal worksurfaces are constructed of 1-1/8" thick 45# density particleboard with .030 thick high-pressure laminate and .030 thick high-pressure backing sheet. Post-formed (PL) edge worksurfaces have elliptical front edge. Rear and side edges are covered in matching flat .024" edge banding. Urethane (ME) edge worksurfaces have elliptical molded front edge. Rear and side edges molded in 1/4" flat urethane, 74P (74P) edge is 2mm thick and bonded to all 4 sides of the surface. Worksurfaces have one or two 6" x 21" cutouts which accept Smart Lift unit(s). Smart Lift price is included in the price shown for worksurface. Smart Lift cutouts in the worksurface are sealed and painted black. A single grommet or PowerUp module may be placed in most worksurfaces. Grommets are standard 5-3/4" x 2-1/4" and have a flin-up receding door. Grommets are the same size as PowerUp modules to allow for retrofitting. The grommet or PowerUp will be placed in the upper right corner for worksurface widths of 48" and 54" or centered between the

doors for the 66" and 72" double units. The door is fabricated from 5/8" thick 45# density with .030" high-pressure laminate on both faces. The door edges are sealed and painted black.

#### Smart Lift Beam Assembly

Beam door is constructed of a .06" thick dual-durometer extrusion joined to the steel lower rail by a tongue and groove fit. The door has a continuous flexible hinge allowing it to pivot at the bottom. The beam allows all cords to be stored within. The front side of the beam is partially covered by the garage and its components with minimum accessibility from the user side. Beams for the Smart Lift must be specified as "standalone," "end-of-run left," "middle," or "end-of-run right." Standalone beams will be shipped with two end caps: end-of-run beams will be shipped with either a left or right end cap; middle beams will not include any end caps.

#### Smart Lift Legs

Vertical leg tube measures 2" x 5" and is constructed of 14-gauge formed steel. All legs have vertical wire management capabilities. A reversible vertical wireway is standard with each leg. Steel trim and liquid-tight fittings are available for power infeeds at the bottom of any leg. All "C" legs can be used as either end legs or shared legs. Nylon glide can be adjusted vertically up to 1-1/4".

#### Smart Lift Unit

The garage housing and front panel is fabricated from 16-gauge steel with matching powder-coated finishes. Internal components and wiring for the monitor, keyboard, and mouse can be accessed by removal of seven screws attaching the front panel. The lift bar is fabricated from 11-gauge steel with a 14-gauge steel keyboard/mouse tray and is available in black powder-coat finish. The lift bar and rising door is guided by four, maintenance-free V-groove roller bearings attached to an 11-gauge roller bracket also available in black powder-coat finish. The lift bar is raised pneumatically via a cable/pulley mechanism that is mounted inside the unit. The keyboard/mouse tray features a 3/16" diameter wire rod to hold the keyboard vertically in place for storage and provides for an area under the monitor for mouse storage. The garage unit can be specified with a keyed lock that allows every cover to be locked individually or a remote locking option that allows

fobs. Wire management within the unit is accomplished with a corrugated polyethylene hose and grommet/clamp arrangement. The hose is split lengthwise to allow for easier insertion of cords with large plugs. An optional monitor tilt kit can be specified to allow up to 10 degrees of tilt and reduce glare. Smart Lift units without monitor tilt can accommodate a VESA compliant monitor with a maximum size of 3.6" deep x 19.0" high x 21.0" wide and maximum weight of 15#. The combined keyboard and monitor thickness must be less than 4.8" thick. The maximum depth of monitor with the monitor tilt option is reduced by .6" to 3.0".

#### **Smart Lift Operation**

Monitor and peripherals can be accessed by lightly depressing the center, front of door and releasing. The unit will automatically raise fully allowing access to the monitor, keyboard and mouse. Internally stored keyboard and mouse may be removed manually for use. After use, the keyboard, mouse, and associated wiring can be restowed below the monitor. Storage of monitor and peripherals is accomplished by pushing down firmly on the top, center of door until slightly

multiple-unit locking via control of 1-5 remote key below worksurface height and releasing.

#### Remote Control Unit

Sends locking and unlocking signals to receivers. Remote must be specified separately if electric lock option (ELK) is selected.

#### PowerUp

PowerUp is a UL Listed, relocatable power tap, which mounts flush into the table top. When flipped up, (cover open), one duplex receptacle and two data ports are exposed. PowerUp is UL Listed (UL1363) as a Temporary Power Tap. The PowerUp module is 7" long x 3-1/2" wide x 2-1/2" high and fits securely into a 6-1/4" x 3" cutout, still allowing removal without tools. The module is constructed of polycarbonate with a textured finish, meeting UL-VO minimum requirements. The module has two receptacles, rated at 15 Amps/125 Volts and two locations for data connectors. Snap-in data plates hold data connectors and allow the standard module to accommodate most manufacturers. The data connectors are not supplied with the module and are purchased by the customer. The module has a dampened spring-loaded mechanism allowing the

unit to open for use and close when not in use. The power receptacles open above the plane of the worksurface to avoid accidental spills into the receptacle. Data jacks remain stationary to avoid excess wear and tear on the wire connections and promote transmission of data communication. Data ports are molded to accept RJ45 jacks, but can be modified to accept various brands of jacks. The module comes standard with a 22" cord and a 3-prong plug.

#### 10-Wire Pre-wired Harness

UL listed the wiring configurations of the 810-wire systems are as follows: 622-Six hot conductors (12-gauge), two neutral conductors (10-gauge) and two grounds (12-gauge). System provides four 20 amp, 125 volt capacity circuits. All receptacles are rated at 15 amps. 125 volt capacity. Connection diagrams are available. Pre-wired harness plugs into the adjacent table harness for table reconfiguration.

#### **Communications Circuitry**

Data connectors and wiring must be ordered separately by the customer.

New York City and Chicago installations will require a Product Modification Request. Contact KI customer service for details.

#### INFORMATION

#### Warranty

Refer to KI Terms & Conditions document or visit ki.com



PCG PMY PSA PWG



Surface FinishLaminate		Cool Grey	CG	Nordic	END	Cool Grey
Belair	LBQ	Cottonwood	CO	Poppy Red	EPR	Misty Brown
Biltmore Cherry	LBT	Earthen Clay	EY	Purple Haze	EPH	Sand
Black	LBK	Espresso Metallic	EX	River Cherry	ERY	Warm Grey
Brighton Walnut	LBW	Everglade Shade	EV	Rubber Ducky	ERK	
Canyon Zephyr	LCA	Flannel	FN	Sand	ESA	
Castle Oak	LCO	Glitz Metallic	GZ	Sky Blue	ESK EAZ	
Casual Linen Cherry Storm	LCU	Hazy Jade Honey Bee	HJ HY	Sterling Ash Surf's Up	ESP	
Classic Linen	LCX LCI	Light Tone	LG	Twilight Shadow	ETI	
Cloud Zephyr	LCL	Mardi Gras	MG	Ultra Blue	EUB	
Cocobala	LCC	Misty Brown	MY	Warm Grey	EWG	
Crisp Linen	LRI	Nemo	NE	Windsor Mahogany	EWY	
Desert Zephyr	LDZ	Nordic	ND	Zesty Lime	EZL	
Dove Grey	LDG	Purple Haze	PH	•		
Fired Steel	LIL	Rubber Ducky	RK	Edge Color for ME Edge		
Flax Linen	LXF	Sand	SA	Black	EBL	
Florence Walnut	LFC	Starlight Silver Metallic	SX	Blue Grey	EGR	
Forged Steel	LOL	Surf's Up	SP	Cool Grey	ECG	
Friston Ash	LFH	Twilight Shadow	TI	Flannel	EFN	
Frosty White	LFW	Ultra Blue	UB	Misty Brown Sand	MY ESA	
Graphite Nebula	LGN	Warm Grey	WG	Warm Grey	EWG	
Grey	LGE	Zesty Lime	ZL	waini diey	LVVG	
High Rise	LHE	Paint Color -		No edge color selectin for the Postformed	(PL) edge.	
Hollyberry	LHY	Infeed		Grommet Color		
Irish Linen	LIH	Black	BL	Grommet Black	GRBL	
Island	LID	Blue Grey	GR	Grommet Blue Grey	GRGR	
Italian Silver Ash	LIT	Sand	SA	Grommet Cool Grey	GRCG	
Kensington Maple Lapis Blue	LKM LLB	Warm Grey	WG	Grommet Flannel	GRFN	
Markerboard White	LMK	Edgo Color for 74B Edgo		Grommet Misty Brown	GRMY	
Misted Zephyr	LMR	Edge Color for 74P Edge  Belair	EBQ	Grommet Sand	GRSA	
Monticello Maple	LMT	Biltmore Cherry	EBT	Grommet Warm Grey	GRWG	
Nickel Evolv	LNV	Black	EBL	Decree He Madala Calan		
North Sea	LNA	Blue Grey	EGR	Power-Up Module Color	DUDI	
Ocean	LON	Brighton Walnut	EBW	PowerUp Black	PUBL	
Pearl Bisque	LPB	Castle Oak	ECO	PowerUp Blue Grey PowerUp Cool Grey	PUGR PUCG	
Pearl Silver	LPS	Cayenne	ECY	PowerUp Flannel	PUFN	
Pressed Linen	LPR	Cherry Storm	ECX	PowerUp Misty Brown	PUMY	
River Cherry	LRY	Cocobala	ECC	PowerUp Sand	PUSA	
Rugged Linen	LRG	Cool Grey	ECG	PowerUp Warm Grey	PUWG	
Satin Stainless	LSS	Earthen Clay	EEY			
Shadow Zephyr	LSR	Everglade Shade	EEV	Villa Module/Grommet Color		
Silicon evolv	LSV	Flannel	EFN	Black	BL	
Sterling Ash	LAZ	Florence Walnut	EFC	Blue Grey	GR	
Tailored Linen	LTL	Friston Ash	EFH	Bronze Metallic	ZM	
Titanium evolv	LTV	Frosty White	EFW	Champagne Metallic	CM	
White Nebula	LWL	Hazy Jade	EHJ	Cool Grey	CG	
White Sand	LWN	Honey Bee	EHY	Cottonwood	CO	
Windsor Mahogany	LWY	Italian Silver Ash	EIT	Flannel	FN	
Paint Color -		Kensington Maple	EKM	Misty Brown Starlight Silver Metallic	MY SX	
Enclosure, Beams, "C" Legs		Light Tone Mardi Gras	ELG EMG	Warm Grey	WG	
Black	BL	Misty Brown	EMY	wann diey	VVG	
Blue Grey	GR	Monticello Maple	EMT	Trim Color -		
Bronze Metallic	ZM	Multiplex	EMB	Beams		
Cayenne	CY	Nemo	ENE	Black	PBL	
Champagne Metallic	CM		LIVE	Blue Grey	PGR	

Finish Cards
View color swatches for items listed within this document.

Paints

Wood/Veneer

Molded Edges
Hard Plastics

Edge Styles

Glass

Worksurfaces - Poly Grommet/PowerUp



Smart Lift® Worksurfaces - Poly Grommet/PowerUp

		MODEL N	IUMBER														
					Grommet/				Grommet/			Approx.					
	D W	Basic	Edge Style	Power	Module	Lock	Surface	Edge	Module	Enclosure		Packaged	74P Edge	Postformed Edge	Urethane Edge		
				Option	Location	Option	Finish	Color		Color	Length	Weight	(74P)	(PL)	(ME)		
<i>∕</i> 2.		ISMT3036			S							81.0#	\$ 1340	\$ 1405	\$ 1483		
TIME		ISMT3042			S							89.0#	1367	1432	1515		
		ISMT3048										99.0#	1393	1459	1541		
	30 x 54"	ISMT3054										106.0#	1418	1483	N/A		
ISMT																	
Single Unit																	
Legs are attached to the worksurface																	
through threaded steel inserts																	
<ul> <li>Beams and legs must be specified separately</li> </ul>																	
One PowerUp module or grommet is																	
available in the upper right corner for																	
48" and 54" widths																	
30" depth provides 17" leg clearance																	
<ul> <li>Remote must be specified separately if electric lock option (ELK) is select-</li> </ul>																	
ed																	
22" PowerUp is recommended when																	
the beam is powered																	
108" PowerUp is recommended																	
when the beam is not powered																	
<ul> <li>The lift, without the tilt option, can accommodate a VESA compliant</li> </ul>																	
monitor with a maximum size of																	
3.6" deep x 19" high x 21" wide and																	
maximum weight of 15 lbs																	
The combined keyboard and monitor thickness must be less than 4.9"																	
thickness must be less than 4.8" thick																	
The maximum depth of monitor with																	
the optional tilt bracket (specified																	
separately) is reduced by .6" to 3.0"																	
A single SmartLift will receive one 5      It kits includes two 2.1/2 lb weights																	
Ib kit: includes two 2-1/2 lb weights, carriage bolt and locking nut																	
ournage poir and rooming flut																	

#### **HOW TO ORDER**

Indicate the following information on order form:

1. Quantity of each item.

2. Model number, including options. See "How To Build a Model Number".

3. Any special service required.

Note: • The ☐ indicates that a choice is required.

- ullet The absence of the  $\square$  indicates that no choice is required.
- ullet Alpha-numeric characters in place of  $\Box$ indicate that no other alternatives are available.

#### HOW TO BUILD A MODEL NUMBER

**B O** 

0

**(3**)

**(3**)

A Select basic model.

A

Select edge style.

74P - 74P edge - Postformed edge - Urethane edge

Select top feed/power option. - No top feed - Left hand top feed

- Right hand top feed

• Select PowerUp or grommet location.

- Grommet only (Rectangular) - PowerUp only; add \$164 - No PowerUp modules,no grommets (solid surface top)

Select locking option. Remote must be specified separately if 'Electric

lock' option (ELK) is selected. NLK - No lock ELK - Electric lock; add \$303

MLA - Manual lock, keyed alike; add \$46 MLS - Manual lock, keyed standard; add \$46

**(1)** 

- 108" (inches) 22 - 22" (inches)

•

0

Select surface finish.

G

Refer to the **Product Color Options** page in this price list. Surface finish offerings are based on edge style selections.

**G**Select edge color.

selections.

Refer to the **Product Color Options** page in this Edge color offerings are based on edge style

Select grommet/module color.

Refer to the **Product Color Options** page in this price list.

Select enclosure color. Refer to the **Product Color Options** page in this

Select cord length (feet).

#### INFORMATION

#### Shipping

Worksurfaces with cutouts are shipped separately from garage units. Garage units are shipped assembled with lids pre-attached.

## FINISH INFORMATION

#### **Additional Laminate Offering**

Additional laminates beyond KI standard offering, are available with two weeks extended leadtime. To specify additional laminates, use these designators followed by the supplier's color/pattern code:

Formica - LF/supplier's color pattern code Nevamar - LN/supplier's color pattern code Wilsonart - LW/supplier's color pattern code

KI's standard finish is the supplier's recommended finish for that color/pattern. Note: Nonstandard laminates from these suppliers

(example: textured laminates), require an upcharge and additional leadtime. Contact KI.

## Special Carton Marking

SPECIAL SERVICES

### With specially marked information N/C

### Shipping

Ships knocked down, FOB Bonduel, WI 54107, freight prepaid. Freight class 70.

## Smart Lift®

Worksurfaces - Poly Grommet/PowerUp



Worksurfaces - Poly Grommet/PowerUp

**MODEL NUMBER** Grommet/ Approx. Packaged 74P Edge Power Module Lock Surface Edge Module Enclosure Cord Postformed Edge Urethane Edge D x W Model Style Option Location Option Finish Color Color Color Weight (74P) 30 x 60" ISMT3060 149.0# \$ 2428 \$ 2544 \$ 2692 30 x 66" 156.0# 2519 2637 N/A ISMT3066 30 x 72" ISMT3072 161.0# 2609 2727 2887 Double Unit · Legs are attached to the worksurface through threaded steel inserts · Beams and legs must be specified • One PowerUp module or grommet is available centered between the doors for double-unit 66" and 72" widths • 30" depth provides 17" leg clearance · Remote must be specified separately if electric lock option (ELK) is select-• 22" PowerUp is recommended when the beam is powered • 108" PowerUp is recommended when the beam is not powered • The lift, without the tilt option, can accommodate a VESA compliant monitor with a maximum size of 3.6" deep x 19" high x 21" wide and maximum weight of 15 lbs The combined keyboard and monitor thickness must be less than 4.8" . The maximum depth of monitor with the optional tilt bracket (specified separately) is reduced by .6" to 3.0" A double SmartLift will receive two 5 Ib kits: includes four 2-1/2 lb weights,

#### **HOW TO ORDER**

Indicate the following information on order form:

carriage bolt and locking nut

1. Quantity of each item.

- 2. Model number, including options. See "How To Build a Model Number".
- 3. Any special service required.

Note:  $\bullet$  The  $\square$  indicates that a choice is required.

- The absence of the ☐ indicates that no choice is required
- ullet Alpha-numeric characters in place of  $\Box$ indicate that no other alternatives are available.

#### HOW TO BUILD A MODEL NUMBER

Θ

A Select basic model.

A

BSelect edge style. **74P** - 74P edge

**3** 

- Postformed edge - Urethane edge

Select top feed/power option. - No top feed - Left hand top feed

• Select PowerUp or grommet location.

- Grommet only (Rectangular) - PowerUp only; add \$164 - No PowerUp modules,no grommets (solid surface top)

Select locking option. Remote must be specified separately if 'Electric lock' option (ELK) is selected.

NLK - No lock ELK - Electric lock; add \$428

**G**Select edge color. - Right hand top feed

0

Select grommet/module color. Refer to the **Product Color Options** page in this price list.

0

Refer to the **Product Color Options** page in this

Surface finish offerings are based on edge style

Refer to the **Product Color Options** page in this

Edge color offerings are based on edge style

- Manual lock, keyed alike; add \$92

- Manual lock, keyed standard; add

0

0

- 108" (inches)

- 22" (inches)

Select enclosure color. Refer to the **Product Color Options** page in this

Select cord length (feet).

**(3) (3) (4)** 

MLS

Select surface finish.

\$92

price list.

selections.

selections.

#### INFORMATION

#### Shipping

Worksurfaces with cutouts are shipped separately from garage units. Garage units are shipped assembled with lids pre-attached.

#### FINISH INFORMATION

#### Additional Laminate Offering

Additional laminates beyond KI standard offering, are available with two weeks extended leadtime. To specify additional laminates, use these designators followed by the supplier's color/pattern code:

Formica - LF/supplier's color pattern code Nevamar - LN/supplier's color pattern code Wilsonart - LW/supplier's color pattern code

KI's standard finish is the supplier's recommended finish for that color/pattern. Note: Nonstandard laminates from these suppliers

(example: textured laminates), require an upcharge and additional leadtime. Contact KI.

## **SPECIAL SERVICES**

#### **Special Carton Marking**

With specially marked information N/C

#### Shipping

Ships knocked down, FOB Bonduel, WI 54107, freight prepaid. Freight class 70.

Worksurfaces - Villa Metal Grommet/Power Module





**MODEL NUMBER** Grommet/ Approx. Surface Edge 74P Edge Edge Power Module Lock Module Enclosure Cord Packaged Postformed Edge Urethane Edge D x W Model Style Option Location Option Finish Color Color Weight (74P) (ME) 99.0# \$ 1393 \$ 1459 \$ 1541 106.0# 1418 1483 N/A



## Single Unit

- · Legs are attached to the worksurface through threaded steel inserts
- Beams and legs must be specified separately
- One PowerUp module or grommet is available in the upper right corner for 48" and 54" widths
- 30" depth provides 17" leg clearance · Remote must be specified separately if electric lock option (ELK) is select-
- 22" PowerUp is included when the
- beam is powered • 108" PowerUp is included when the beam is not powered
- The lift, without the tilt option, can accommodate a VESA compliant monitor with a maximum size of 3.6" deep x 19" high x 21" wide and maximum weight of 15 lbs
- The combined keyboard and monitor thickness must be less than 4.8"
- The maximum depth of monitor with the optional tilt bracket (specified separately) is reduced by .6" to 3.0"
- A single SmartLift will receive one 5 lb kit: includes two 2-1/2 lb weights, carriage bolt and locking nut

	A	<b>B</b>	0	0	<b>9</b>	•	О	0	0	0	1
30 x 54"	IVMT3054		Ш								

#### **HOW TO ORDER**

Indicate the following information on order form:

- 1. Quantity of each item.
- 2. Model number, including options. See "How To Build a Model Number".
- 3. Any special service required.

Note:  $\bullet$  The  $\square$  indicates that a choice is required.

- The absence of the ☐ indicates that no choice is required
- ullet Alpha-numeric characters in place of  $\Box$ indicate that no other alternatives are available.

#### HOW TO BUILD A MODEL NUMBER

A Select basic model.

**B**Select edge style.

**74P** - 74P edge - Postformed edge - Urethane edge

Select top feed/power option. - No top feed - Left hand top feed - Right hand top feed

• Select PowerUp or grommet location.

- One grommet for Villa only; add - One Villa module w/USB and

grommet; add \$427 • Cutouts only-for single circuit use (grommet not included)

Select locking option. Remote must be specified separately if 'Electric lock' option (ELK) is selected.

NLK - No lock - Electric lock; add \$303 ELK - Manual lock, keyed alike; add \$46 MLS - Manual lock, keyed standard; add

Select cord length (feet).

108

- 108" (inches)

- 36" (inches)

\$46 Select surface finish. Refer to the **Product Color Options** page in this

Surface finish offerings are based on edge style selections

GSelect edge color.

price list.

price list.

Refer to the **Product Color Options** page in this price list. Edge color offerings are based on edge style selections.

Select grommet/module color. Refer to the **Product Color Options** page in this

Select enclosure color. Refer to the **Product Color Options** page in this

#### INFORMATION

#### Shippina

Worksurfaces with cutouts are shipped separately from garage units. Garage units are shipped assembled with lids pre-attached.

#### FINISH INFORMATION

#### **Additional Laminate Offering**

Additional laminates beyond KI standard offering, are available with two weeks extended leadtime. To specify additional laminates, use these designators followed by the supplier's color/pattern code:

Formica - LF/supplier's color pattern code Nevamar - LN/supplier's color pattern code Wilsonart - LW/supplier's color pattern code

KI's standard finish is the supplier's recommended finish for that color/pattern. Note: Nonstandard laminates from these suppliers

(example: textured laminates), require an upcharge and additional leadtime. Contact KI

## **Special Carton Marking**

**SPECIAL SERVICES** 

With specially marked information N/C

#### Shipping

Ships knocked down, FOB Bonduel, WI 54107, freight prepaid. Freight class 70.












Worksurfaces - Villa Metal Grommet/Power Module



Worksurfaces - Villa Metal Grommet/Power Module

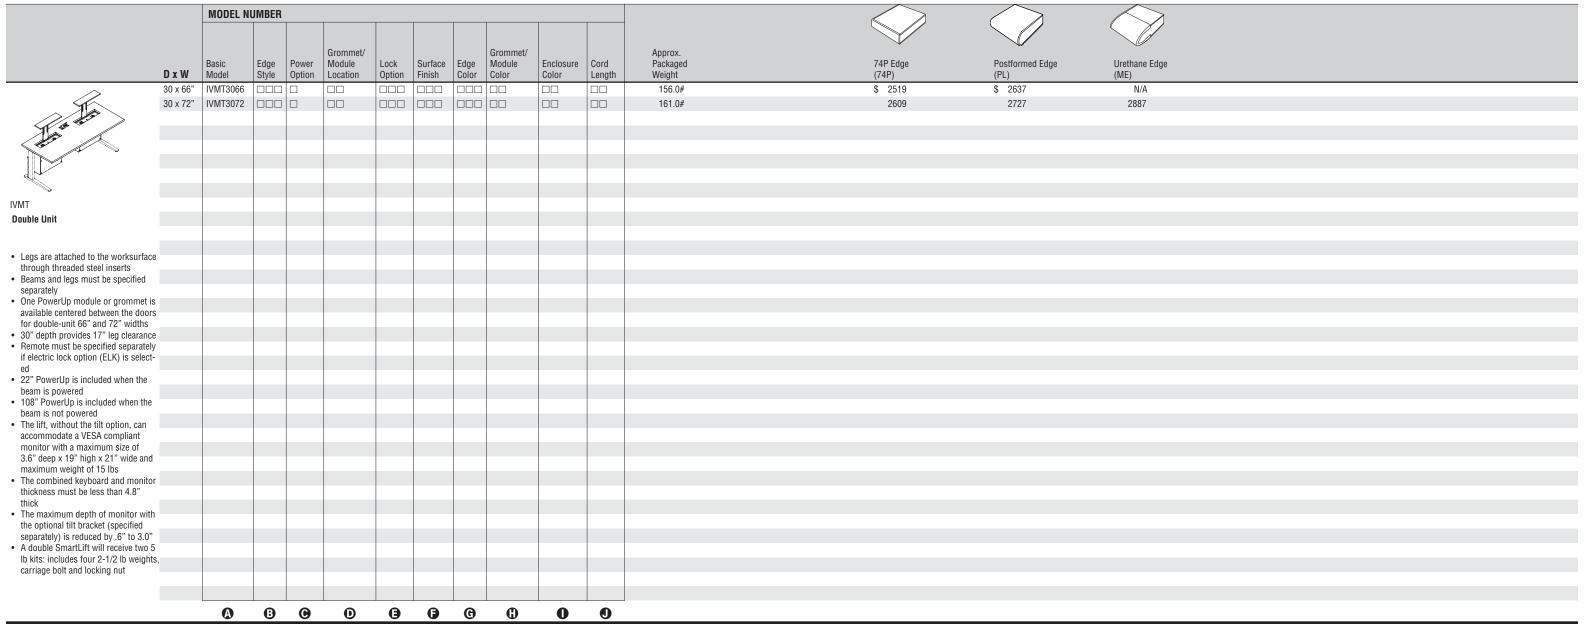

#### **HOW TO ORDER**

Indicate the following information on order form:

1. Quantity of each item.

- 2. Model number, including options. See "How To Build a Model Number".
- 3. Any special service required.

Note:  $\bullet$  The  $\square$  indicates that a choice is required.

- The absence of the ☐ indicates that no choice is required.
- Alpha-numeric characters in place of 
  indicate that no other alternatives are available.

#### HOW TO BUILD A MODEL NUMBER

A Select basic model.

BSelect edge style.
74P - 74P edge

L - Postformed edge

Urethane edge

Select top feed/power option.

N - No top feed

L - Left hand top feed

R - Right hand top feed

• Select PowerUp or grommet location.

VG - One grommet for Villa only; add \$88 VM - One Villa module w/USB and

grommet; add \$427

OC - Cutouts only-for single circuit use (grommet not included)

Select locking option.

Remote must be specified separately if 'Electric

lock' option (ELK) is selected.

NLK - No lock
ELK - Electric lock; add \$428

MLA - Manual lock, keyed alike; add \$92

MLS - Manual lock, keyed standard; add
\$92

Select cord length (feet).

**108** - 108" (inches)

- 36" (inches)

Select surface finish.

Refer to the **Product Color Options** page in this price list.
Surface finish offerings are based on edge style

**G**Select edge color.

selections

selections.

Refer to the **Product Color Options** page in this price list.

Edge color offerings are based on edge style

Select grommet/module color.

Refer to the **Product Color Options** page in this price list.

Select enclosure color.
Refer to the **Product Color Options** page in this price list

#### INFORMATION

#### Shipping

Worksurfaces with cutouts are shipped separately from garage units. Garage units are shipped assembled with lids pre-attached.

#### FINISH INFORMATION

#### Additional Laminate Offering

Additional laminates beyond KI standard offering, are available with two weeks extended leadtime. To specify additional laminates, use these designators followed by the supplier's color/pattern code:

Formica - LF/supplier's color pattern code Nevamar - LN/supplier's color pattern code Wilsonart - LW/supplier's color pattern code

KI's standard finish is the supplier's recommended finish for that color/pattern. Note: Nonstandard laminates from these suppliers

(example: textured laminates), require an upcharge and additional leadtime.

## SPECIAL SERVICES

## Special Carton Marking

With specially marked information N/C

#### Shipping

Ships knocked down, FOB Bonduel, WI 54107, freight prepaid. Freight class 70.





				▼		
		MODEL NUMBER				
	MODEL	Basic Model	Approx. Packaged Weight	Delivero Pricing		
HRDPT	Monitor Tilt  Allows up to 10 degrees of monitor tilt  Adds .6" of depth to the monitor	SMTTILT	1.0#	\$ 18	3	
HRDPT	Can order one per room or one per control box     Only six remotes can be programmed per controller box	LTREMOTE	0.1#	\$ 5	5	
HRDPT	Single Counterweight Kit  The weight kit will consist of two 2-1/2 lbs weights, a carriage bolt and a locking nut  Kit allows weight to be added in 2-1/2 lbs increments  The monitor, mouse, keyboard and counter weights used on Smart Lift unit should not exceed 15lbs		5.0#	<b>\$</b> 5		
HRDPT	Double Counterweight Kit  The weight kit will consist of four 2-1/2 lbs weights, a carriage bolt and a locking nut  Kit allows weight to be added in 2-1/2 lbs increments  The monitor, mouse, keyboard and counter weights used on Smart Lift unit should not exceed 15lbs		10.0#	\$ 9	7	

Indicate the following information on order form:

- 1. Quantity of each item.
- 2. Model number, including options. See "How To Build a Model Number".
- 3. Any special service required.

Note:  $\bullet$  The  $\square$  indicates that a choice is required.

- ullet The absence of the  $\square$  indicates that no choice is required.
- $\bullet$  Alpha-numeric characters in place of  $\Box$  indicate that no other alternatives are available.

#### HOW TO BUILD A MODEL NUMBER

A

A Select basic model.

## SPECIAL SERVICES

**Special Carton Marking** 

With specially marked information N/C

Shipping Ships knocked down, FOB Bonduel, WI 54107, freight prepaid. Freight class 70.





							<u> </u>
			MODEL NUI	MBER			
			Basic	Trim	Paint	Approx. Packaged	Delivered
	MODEL	W	Model	Color	Color	Weight	Pricing
	Stand Alone Beam - 10 Wire (6C)	36"	ITFB36S/T6			9.5#	\$ 721
	Beams provide cord management	42"	ITFB42S/T6			11.0#	727
	• Inclines neam end cans		ITFB48S/T6			13.0#	775
	duplex recentacles per unit	54"	ITFB54S/T6			15.0#	850
A CONTRACTOR OF THE PROPERTY O	<ul> <li>Duplex receptacles, infeeds and connec-</li> </ul>	60"	ITFB60S/T6			16.0#	1370
	tors must be ordered separately	66"	ITFB66S/T6			17.0#	1427
	<ul><li>Data covers not available</li><li>60", 66" and 72" are double units</li></ul>		ITFB72S/T6			18.5#	1551
	Trim color is for the front access door						
•							
ITFB							
	Middle Beam - 10 Wire (6C)	36"	ITFB36M/T6			9.5#	\$ 687
	Beams provide cord management	42"	ITFB42M/T6			11.0#	698
	<ul><li>Does not include beam end cap</li><li>Rigid wireway provides mounting for (2)</li></ul>	48"	ITFB48M/T6			13.0#	749
	duplex recentacles per unit	54"	ITFB54M/T6			15.0#	825
	· Duplex receptacles, infeeds and connec-	60"	ITFB60M/T6			16.0#	1342
	tors must be ordered separately <ul><li>Data covers not available</li></ul>	66"	ITFB66M/T6			17.0#	1403
	60", 66" and 72" are double units	72"	ITFB72M/T6			18.5#	1524
*	Trim color is for the front access door						
ITER							

Indicate the following information on order form:

- 1. Quantity of each item.
- 2. Model number, including options. See "How To Build a Model Number".
- 3. Any special service required.

Note:  $\bullet$  The  $\square$  indicates that a choice is required.

- ullet The absence of the  $\square$  indicates that no choice is required.
- $\bullet$  Alpha-numeric characters in place of  $\Box$  indicate that no other alternatives are available.

#### HOW TO BUILD A MODEL NUMBER

- A Select basic model.
- BSelect trim color.

Refer to the **Product Color Options** page in this price list.

**B O** 

Select paint color.

Refer to the **Product Color Options** page in this price list.

#### SPECIAL SERVICES

**Special Carton Marking** 

With specially marked information N/C

Shipping Ships knocked down, FOB Bonduel, WI 54107, freight prepaid. Freight class 70.

# 10-Wire/6 Circuit Beams





							•	
		MO	DEL NUI	MBER				
						Approx. Packaged		
	MODEL	Basi	C	Trim	Paint	Packaged	Delivered	
		<b>I</b> Mod		Color	Color	Weight	Pricing	
	End-of-Run/Left Beam - 10 Wire (6C)	6" ITFB				9.5#	\$ 687	
	Beams provide cord management     Advantagement	2" ITFB	342L/T6			11.0#	698	
	<ul> <li>Includes beam end cap</li> <li>Rigid wireway provides mounting for (2)</li> </ul>	8" ITFB	348L/T6			13.0#	749	
	duplex recentacles per unit 5	4" ITFB				15.0#	825	
	• Duplex receptacles, infeeds and connec-	o" ITER				16.0#	1342	
	tors must be ordered separately					17.0#	1403	
N. T.	Data covers not available					18.5#	1524	
		2   11176	0/2L/10			10.5#	1324	
	Trim color is for the front access door							
ITFB								
A P1			36R/T6			9.5#	\$ 687	
			342R/T6			11.0#	698	
	<ul> <li>Includes beam end cap</li> <li>Rigid wireway provides mounting for (2)</li> </ul>	8" ITFB	348R/T6			13.0#	749	
	duplex receptacles per unit 5	4" ITFB	354R/T6			15.0#	825	
	• Duplex receptacles, infeeds and connec-	o" ITER				16.0#	1342	
	tors must be ordered separately					17.0#	1403	
	Data covers not available	o"   ITED	372R/T6			18.5#	1524	
		_	01211/10			10.5π	1324	
	Trim color is for the front access door							
ITFB								
			A	<b>B</b>	•			
			_	_	_			

#### **HOW TO ORDER**

Indicate the following information on order form:

- 1. Quantity of each item.
- 2. Model number, including options. See "How To Build a Model Number".
- 3. Any special service required.

Note:  $\bullet$  The  $\square$  indicates that a choice is required.

- ullet The absence of the  $\square$  indicates that no choice is required.
- $\bullet$  Alpha-numeric characters in place of  $\Box$  indicate that no other alternatives are available.

## HOW TO BUILD A MODEL NUMBER

- A Select basic model.
- BSelect trim color. Refer to the **Product Color Options** page in this price list.

Select paint color.

Refer to the **Product Color Options** page in this price list.

#### SPECIAL SERVICES

**Special Carton Marking** 

With specially marked information N/C

Shipping Ships knocked down, FOB Bonduel, WI 54107, freight prepaid. Freight class 70.







						<u> </u>	
		MOD	EL NUMBE	R			
		D:-	т.:	D.::	Approx.	Dellarend	
	MODEL	W Basic W Model	Tri	m Pain		Delivered Pricing	
		36" ITFB36				\$ 493	
		42" ITFB42				534	
	<ul> <li>Rigid beam provides wire management</li> </ul>	48"   ITFB48				560	
	• Data covers not available	54" ITFB54				635	
		60" ITFB60				725	
ITFB		66" ITFB66				758	
		72" ITFB72				902	
		36" ITFB36	L/NN 🗆		8.0#	\$ 469	
		42"   ITFB42	L/NN 🗆		9.0#	506	
	<ul> <li>Rigid beam provides wire management</li> <li>Data covers not available</li> </ul>	48"   ITFB48	L/NN 🗆		10.0#	534	
		54"   ITFB54	L/NN 🗆		11.0#	608	
V		60"   ITFB60	L/NN 🗆		12.0#	697	
ITFB		66"   ITFB66	L/NN 🗆		13.0#	733	
		72" ITFB72	L/NN 🗆		14.0#	873	
	Middle Beam - No Power (NN)	36"   ITFB36	M/NN 🗆			\$ 469	
	Bloid heam provides wire management	42" ITFB42				506	
	<ul> <li>Data covers not available</li> </ul>	48"   ITFB48				534	
		54"   ITFB54				608	
		60"   ITFB60				697	
ITFB		66"   ITFB66				733	
		72" ITFB72				873	
. Pa	End-of-Run/Right Beam - No Power (NN) • Includes beam end cap					\$ 469	
	Rigid heam provides wire management	42"   ITFB42				506	
	Data covers not available	48"   ITFB48				534	
		54" ITFB54				608	
*		60"   ITFB60				697	
ITFB		66"   ITFB66				733	
		72" ITFB72	R/NN   □		14.0#	873	
			<b>a</b>	B 6			

Indicate the following information on order form:

- 1. Quantity of each item.
- 2. Model number, including options. See "How To Build a Model Number".
- 3. Any special service required.

Note:  $\bullet$  The  $\square$  indicates that a choice is required.

- ullet The absence of the  $\square$  indicates that no choice is required.
- $\bullet$  Alpha-numeric characters in place of  $\Box$  indicate that no other alternatives are available.

#### HOW TO BUILD A MODEL NUMBER

A Select basic model.

BSelect trim color.

Refer to the **Product Color Options** page in this price list.

Select paint color.

Refer to the **Product Color Options** page in this price list.

#### SPECIAL SERVICES

**Special Carton Marking** 

With specially marked information N/C

Shipping Ships knocked down, FOB Bonduel, WI 54107, freight prepaid. Freight class 70.







			MODEL NU	JMBER			
	MODEL	D x H	Basic Model	Leg Color	Approx. Packaged Weight	Delivered Pricing	
	Standard Smart Lift "C" Leg	30 x 29"	ITFL3029		20.0#	\$ 312	
	<ul> <li>Legs will accept power infeed or data infeed, not both</li> </ul>	30 x 38"	ITFL3038		26.0#	329	
	<ul> <li>1-1/4" vertical glide adjustment</li> </ul>						
	<ul> <li>Only one leg is included in a kit</li> </ul>						
ITFL							
			A	B			

Indicate the following information on order form:

- 1. Quantity of each item.
- 2. Model number, including options. See "How To Build a Model Number".
- 3. Any special service required.

Note:  $\bullet$  The  $\square$  indicates that a choice is required.

- ullet The absence of the  $\square$  indicates that no choice is required.
- $\bullet$  Alpha-numeric characters in place of  $\Box$  indicate that no other alternatives are available.

#### HOW TO BUILD A MODEL NUMBER

A Select basic model.

Select leg color.

Refer to the **Product Color Options** page in this price list.

#### SPECIAL SERVICES

**Special Carton Marking** 

With specially marked information N/C

Shipping Ships knocked down, FOB Bonduel, WI 54107, freight prepaid. Freight class 70.







					▼	
		MODEL NU	MBER			
	MODEL		Paint Color	Approx. Packaged Weight	Delivered Pricing	
4	Floor Infeed 10-Wire	PTFF		5.0#	\$ 197	
<b>5</b>	<ul> <li>Provides power from fixed floor or wall sources to table power distribution</li> </ul>					
	system • 105" infeed length					
	• 105" infeed length					
HRDPT						
חהטרו	Overhead Infeed Civerit Dre mined	DOOFTO		1F 0#	<b>ф.</b> 740	
$\Rightarrow$	Overhead Infeed Circuit Pre-wired • Provides power from ceiling source to	PCOF.T6		15.0#	\$ 748	
	table distribution system					
	Includes 10' long aluminum pole with separate channel for electrical and data					
HRDPT	entry and prewired harness					
	8-Wire to 10-Wire Adaptor • 20" long	47.0568.20		1.0#	\$ 190	
The second second	• 20" long					
A Samuel						
€I.P						
HRDPT						

Indicate the following information on order form:

- 1. Quantity of each item.
- 2. Model number, including options. See "How To Build a Model Number".
- 3. Any special service required.

Note: • The ☐ indicates that a choice is required.

- The absence of the ☐ indicates that no choice is required.
- Alpha-numeric characters in place of □ indicate that no other alternatives are available.

## HOW TO BUILD A MODEL NUMBER

A Select basic model.

BSelect paint color.

Refer to the **Product Color Options** page in this price list.

A

**B** 

## INFORMATION

#### Infrared Receiver

Works with, and must be ordered with an Infrared Remote Control Unit to lock down or unlock a room of tables featuring flatscreen garage units. One receiver is attached to each table and can receive a signal for up to two garage units.

ceiling trim plate.

#### **Infrared Remote Control**

Sends locking and unlocking signals to receivers and can also be used to raise and lower multiple units at once.

#### Floor Infeed (10-Wire)

Two 90° connectors. Flexible steel conduit with eight 12-gauge conductors in the leg. Includes steel trim plate with dual holes for electrical and data entry and six feet of liquid-tight flexible conduit.8315 diameter.

#### Overhead Infeed Circuit Pre-wired

Aluminum pole is 10ft. in length. Flexible steel conduit with ten 12-gauge conductors. Includes

#### SPECIAL SERVICES

#### Special Carton Marking

With specially marked information N/C

#### nnina

Ships knocked down, FOB Bonduel, WI 54107, freight prepaid. Freight class 70.







					<b>▼</b>		
			MODEL NUMBER				
	MODEL	Features	Basic Model	Approx. Packaged Weight	Delivered Pricing		
A	Worksurface-to-Worksurface 10-Wire		46.0782.24	1.0#	\$ 108		
The state of the s	Connector						
	<ul> <li>Connects the 10-wire power system of two adjoining tables</li> </ul>						
	• 18" long						
HRDPT							
	Quad-Block		4BT6	1.0#	\$ 54		
	<ul> <li>Allows power to be distributed from the middle of a table series</li> </ul>						
	<ul> <li>The Quad-block (along with included</li> </ul>						
	jumper) enables infeed power from the						
	building to be routed in two directions. These units four female openings accept						
	the male end of the power infeed and	L					
HRDPT	the male plug ends of two table-to-table						
	jumpers which transfer the power to the						
	two adjoining tables.						
E TO	Receptacles - 6 Circuit	Circuit 1	47.0706.1.BL	1.0#	\$ 32		
	Attaches to wireways of 10 wire powerer tables	d Circuit 2	47.0706.2.BL	1.0#	32		
	Provides two (duplex) receptacles each	Circuit 3	47.0706.3.BL	1.0#	32		
	rated at 15 amps	Circuit 4	47.0706.4I.BL	1.0#	32		
HRDPT	Some circuits are isolated ground     Signification of the standard ground	Circuit 5	47.0706.51.BL	1.0#	32		
	circuits (622 - 4,5, & 6), Isolated ground receptacles are identified by an orange	Circuit 6	47.0706.61.BL	1.0#	32		
	triangle						



Indicate the following information on order form:

- 1. Quantity of each item.
- 2. Model number, including options. See "How To Build a Model Number".
- 3. Any special service required.

Note:  $\bullet$  The  $\square$  indicates that a choice is required.

- ullet The absence of the  $\square$  indicates that no choice is required.
- $\bullet$  Alpha-numeric characters in place of  $\Box$  indicate that no other alternatives are available.

#### HOW TO BUILD A MODEL NUMBER

A Select basic model.

SPECIAL SERVICES **Special Carton Marking** 

With specially marked information N/C

Shipping Ships knocked down, FOB Bonduel, WI 54107, freight prepaid. Freight class 70.

# Smart Lift®

Rectangular Privacy Screens





						•	
			MODEL N	IUMBER			
			Basic	Surface	Approx. Packaged	Delivered	
	MODEL	H x W	Model	Finish	Weight	Pricing	
	Rectangular Privacy Screens - 11" Height				14.0#	\$ 285	
	<ul> <li>Privacy screen brackets and hardware</li> </ul>		ITFP1142		16.0#	318	
			ITFP1148		17.0#	324	
	of 2 screens		ITFP1154		19.0#	359	
	Laminate with matching edge band				23.0#	492	
•					25.0#	534	
ITFP			ITFP1172		26.0#	536	
	Rectangular Privacy Screens - 17" Height				20.0#	\$ 318	
	<ul> <li>Privacy screen brackets and hardware</li> </ul>		ITFP1742		23.0#	362	
	supplied in Graphite Dark only  60", 66", and 72" screens are made up		ITFP1748		26.0#	366	
	- 00 , 00 , and 12 solutions are made up		ITFP1754		29.0#	411	
	<ul> <li>Laminate with matching edge band</li> </ul>	17 x 60"	ITFP1760		32.0#	550	
		17 x 66"	ITFP1766		36.0#	600	
ITFP		17 x 72"	ITFP1772		38.0#	603	
	Rectangular Privacy Screens - 23" Height • Privacy screen brackets and hardware	23 x 36"	ITFP2336		26.0#	\$ 346	
	Privacy screen brackets and hardware	23 x 42"	ITFP2342		30.0#	396	
	supplied in Graphite Dark only  60", 66", and 72" screens are made up	23 x 48"	ITFP2348		34.0#	402	
	of 2 screens	23 x 54"	ITFP2354		38.0#	455	
	<ul> <li>Laminate with matching edge band</li> </ul>	23 x 60"	ITFP2360		42.0#	600	
		23 x 66"	ITFP2366		47.0#	654	
		23 x 72"	ITFP2372		49.0#	660	
ITFP							

#### **HOW TO ORDER**

Indicate the following information on order form:

- 1. Quantity of each item.
- 2. Model number, including options. See "How To Build a Model Number".
- 3. Any special service required.

Note: • The ☐ indicates that a choice is required.

- The absence of the ☐ indicates that no choice is required.
- Alpha-numeric characters in place of 
  indicate that no other alternatives are available.

#### HOW TO BUILD A MODEL NUMBER

A Select basic model.

**B**Select surface finish.

Refer to the **Product Color Options** page in this price list

A

**(3**)

Surface finish offerings are based on edge style selections.

#### FINISH INFORMATION

#### Additional Laminate Offering

Additional laminates beyond KI standard offering, are available with two weeks extended leadtime. To specify additional laminates, use these designators followed by the supplier's color/pattern code:

Formica - LF/supplier's color pattern code Nevamar - LN/supplier's color pattern code Wilsonart - LW/supplier's color pattern code

KI's standard finish is the supplier's recommended finish for that color/pattern.

Note: Nonstandard laminates from these suppliers (example: textured laminates), require an upcharge and additional leadtime.

Contact KI.

## SPECIAL SERVICES

# Special Carton Marking With specially marked information N/C

#### Shipping

Ships knocked down, FOB Bonduel, WI 54107, freight prepaid. Freight class 70.

# Smart Lift®

Stand Alone Privacy Screen





						▼	
			MODEL N	UMBER			
			Basic	Surface	Approx. Packaged	Delivered	
	MODEL	H x W	Model	Finish	Weight	Pricing	
	Rectangular Stand Alone Privacy Screens	s 11 x 36"	ITFPA1136		14.0#	\$ 295	
	- 11" Height  - Stand Alone screens are positioned along the back side of the table (length). No divider screens attached  - Privacy screen brackets and hardware supplied in Graphite Dark only  - 60", 66", and 72" screens are made up of 2 screens	11 x 42"	ITFPA1142		16.0#	328	
		11 x 48"	ITFPA1148		17.0#	330	
		11 x 54"	ITFPA1154		19.0#	366	
		11 x 60"	ITFPA1160		23.0#	501	
711		11 x 66"	ITFPA1166		25.0#	544	
ITFP		11 x 72"	ITFPA1172		26.0#	545	
	Laminate with matching edge band						
	Rectangular Stand Alone Privacy Screens	17 x 36"	ITFPA1736		20.0#	\$ 328	
	- 17" Height		ITFPA1742		23.0#	372	
	<ul> <li>Stand Alone screens are positioned along the back side of the table (length).</li> </ul>	17 x 48"			26.0#	380	
	No divider screens attached	17 X 54"			29.0#	423	
•	<ul> <li>Privacy screen brackets and hardware</li> </ul>		ITFPA1760		32.0#	563	
	supplied in Graphite Dark only • 60", 66", and 72" screens are made up		ITFPA1766		36.0#	608	
	of 2 screens	17 x 72"	ITFPA1772		38.0#	611	
ITFP	<ul> <li>Stand Alone privacy screens are not</li> </ul>						
	available in 23" height						
	<ul> <li>Laminate with matching edge band</li> </ul>						

#### **HOW TO ORDER**

Indicate the following information on order form:

- 1. Quantity of each item.
- 2. Model number, including options. See "How To Build a Model Number".
- 3. Any special service required.

Note: • The ☐ indicates that a choice is required.

- The absence of the ☐ indicates that no choice is required.
- Alpha-numeric characters in place of 
  indicate that no other alternatives are available.

#### HOW TO BUILD A MODEL NUMBER

**(3**)

A Select basic model.

**B**Select surface finish.

Refer to the **Product Color Options** page in this

Surface finish offerings are based on edge style selections.

#### FINISH INFORMATION

#### Additional Laminate Offering

Additional laminates beyond KI standard offering, are available with two weeks extended leadtime. To specify additional laminates, use these designators followed by the supplier's color/pattern code:

Formica - LF/supplier's color pattern code Nevamar - LN/supplier's color pattern code Wilsonart - LW/supplier's color pattern code

KI's standard finish is the supplier's recommended finish for that color/pattern.

Note: Nonstandard laminates from these suppliers (example: textured laminates), require an upcharge and additional leadtime.

Contact KI.

## SPECIAL SERVICES

Special Carton Marking

With specially marked information N/C

Shipping

Ships knocked down, FOB Bonduel, WI 54107, freight prepaid. Freight class 70.







					<b>_</b>	
			MODEL NU	MBER		
	MODEL	ΗxW	Basic Model	Surface Finish	Approx. Packaged Deliv Weight Prici	
	End Divider Screens - 11" Height		ITDV1130/E		13.0#	303
	<ul> <li>Divider screen brackets and hardware</li> </ul>					
	<ul><li>supplied in Graphite Dark only</li><li>Must be used in conjunction with privace</li></ul>	:V				
	screen	,				
	<ul> <li>Laminate with matching edge band</li> </ul>					
ITDV						
	End Divider Screens - 17" Height  • Divider screen brackets and hardware	17 x 30"	ITDV1730/E		17.0# \$	330
	Divider screen brackets and hardware supplied in Graphite Dark only					
	Must be used in conjunction with privace	су				
	screen					
	Laminate with matching edge band					
ITD) (						
ITDV	- I B: : 1	00 00"	ITD\ (0000 (F		00.0"	
	End Divider Screens - 23" Height  • Divider screen brackets and hardware	23 x 30"	ITDV2330/E		22.0#	359
	supplied in Graphite Dark only					
	Must be used in conjunction with privace	СУ				
•	<ul><li>screen</li><li>Laminate with matching edge band</li></ul>					
	Lammato with matering odge band					
ITDV						
			A	₿		

Indicate the following information on order form:

- 1. Quantity of each item.
- 2. Model number, including options. See "How To Build a Model Number".
- 3. Any special service required.

Note:  $\bullet$  The  $\square$  indicates that a choice is required.

- The absence of the ☐ indicates that no choice is required.
- Alpha-numeric characters in place of 
  indicate that no other alternatives are available.

#### HOW TO BUILD A MODEL NUMBER

A Select basic model.

**B**Select surface finish.

Refer to the **Product Color Options** page in this price list

Surface finish offerings are based on edge style selections.

#### FINISH INFORMATION

#### Additional Laminate Offering

Additional laminates beyond KI standard offering, are available with two weeks extended leadtime.

To specify additional laminates, use these designators followed by the supplier's color/pattern code:

Formica - LF/supplier's color pattern code Nevamar - LN/supplier's color pattern code Wilsonart - LW/supplier's color pattern code

KI's standard finish is the supplier's recommended finish for that color/pattern.

Note: Nonstandard laminates from these suppliers (example: textured laminates), require an upcharge and additional leadtime.

Contact KI.

## SPECIAL SERVICES

Special Carton Marking

With specially marked information N/C

Shipping

Ships knocked down, FOB Bonduel, WI 54107, freight prepaid. Freight class 70.







					·	
		MODEL NUM	IBER			
				Approv		
		Basic	Surface	Approx. Packaged	Delivered	
	MODEL H 3	W Model	Finish	Weight	Pricing	
	B	x 30"   ITDV1130/M74		13.0#	\$ 321	
	Divider screen brackets and hardware     11	x 30"   ITDV1130/MME		13.0#	321	
	supplied in Graphite Dark only  • Must be used in conjunction with privacy	x 30"   ITDV1130/MPL		13.0#	321	
		11541100/11112		10.0#	021	
	screen					
3	Laminate with matching edge band					
ITDV						
	Middle Divider Screens - 11" Height 17	x 30"   ITDV1730/M74	P 🗆 🗆 🗆	17.0#	\$ 351	
		x 30"   ITDV1730/MME		17.0#	351	
	11 11 0 11 D 1 1					
	Must be used in conjunction with privacy	x 30"   ITDV1730/MPL		17.0#	351	
	Screen					
	Laminate with matching edge band					
***						
ITDV						
ITDV						
_	Middle Divider Screens - 23" Height 23	x 30"   ITDV2330/M74		22.0#	\$ 375	
	Divider screen brackets and hardware     23	x 30"   ITDV2330/MME		22.0#	375	
	supplied in Graphite Dark only  23	x 30"   ITDV2330/MPL		22.0#	375	
	Must be used in conjunction with priva- cyscreen					
	23" height divider screens are not					
, ,	available on 24" deep worksurfaces					
	Laminate with matching edge band					
	Lammato with matering eage balls					
ITDV						

Indicate the following information on order form:

- 1. Quantity of each item.
- 2. Model number, including options. See "How To Build a Model Number".
- 3. Any special service required.

Note: • The ☐ indicates that a choice is required.

- The absence of the ☐ indicates that no choice is required.
- Alpha-numeric characters in place of 
  indicate that no other alternatives are available.

#### HOW TO BUILD A MODEL NUMBER

A Select basic model.

**B**Select surface finish.

Refer to the **Product Color Options** page in this

Surface finish offerings are based on edge style selections.

A

0

#### FINISH INFORMATION

#### Additional Laminate Offering

Additional laminates beyond KI standard offering, are available with two weeks extended leadtime.

To specify additional laminates, use these designators followed by the supplier's color/pattern code:

Formica - LF/supplier's color pattern code Nevamar - LN/supplier's color pattern code Wilsonart - LW/supplier's color pattern code

KI's standard finish is the supplier's recommended finish for that color/pattern.

Note: Nonstandard laminates from these suppliers (example: textured laminates), require an upcharge and additional leadtime.

Contact KI.

## SPECIAL SERVICES

Special Carton Marking

With specially marked information N/C

#### Shipping

Ships knocked down, FOB Bonduel, WI 54107, freight prepaid. Freight class 70.

1330 Bellevue Street P.O. Box 8100 Green Bay, WI 54308-8100 800.424.2432 ki.com

KI and Furnishing Knowledge are registered trademarks of Krueger International, Inc.

© 2020 Krueger International, Inc. All Rights Reserved. Code KI-PLW-000458/KI/PDF

