

SMARTMOUNT LUMINAIRE

Part Number: GS-3-SMK-L



SMARTMOUNT Luminaire (LU) standardizes installations to luminaire arms and provides the ideal height while remaining within bucket truck limits and avoiding power lines. SMARTMOUNT LU includes the Bell Camera, Junction Box, GRIDSMART 3' x 3' pole, mounting components, and Electronic Protection Module (EPM).

SPECIFICATIONS

BELL CAMERA

Connectivity: M12
Dimensions: 9.4" x 7.95" (23.88 x 20.19 cm)
Weight: 5.6 lbs (2.54 kg)
Cable Length: 78.7" (199.8 cm) for SMARTMOUNT Pole only

POLE ASSEMBLY

Dimensions: 3' elbow (0.91 m)
Weight: 6.95 lbs (3.15 kg)
Material: 1.5" (3.81 cm) schedule 40 aluminum pipe - 6063-T52

JUNCTION BOX


Connectivity: M12 (to Camera)
RJ-45 CAT5e (to Processor)
Dimensions: 9.5" x 3.5" x 3.5" (24.13 x 8.89 x 8.89 cm)
Weight: 0.7 lbs (0.32 kg)
ABA Material: Polycarbonate/ASA blend,
UV Stabilized
Environmental: -29° F to 165° F (-34° C to 74° C)
Rated: IP67

MOUNTING KIT

Weight: 2.75 lbs (1.25 kg)
(2 lbs camera mounting hardware and
screws, 0.75 lbs cable)
Wind Tunnel Tested: >150 mph

SMARTMOUNT LUMINAIRE

Part Number: GS-3-SMK-L

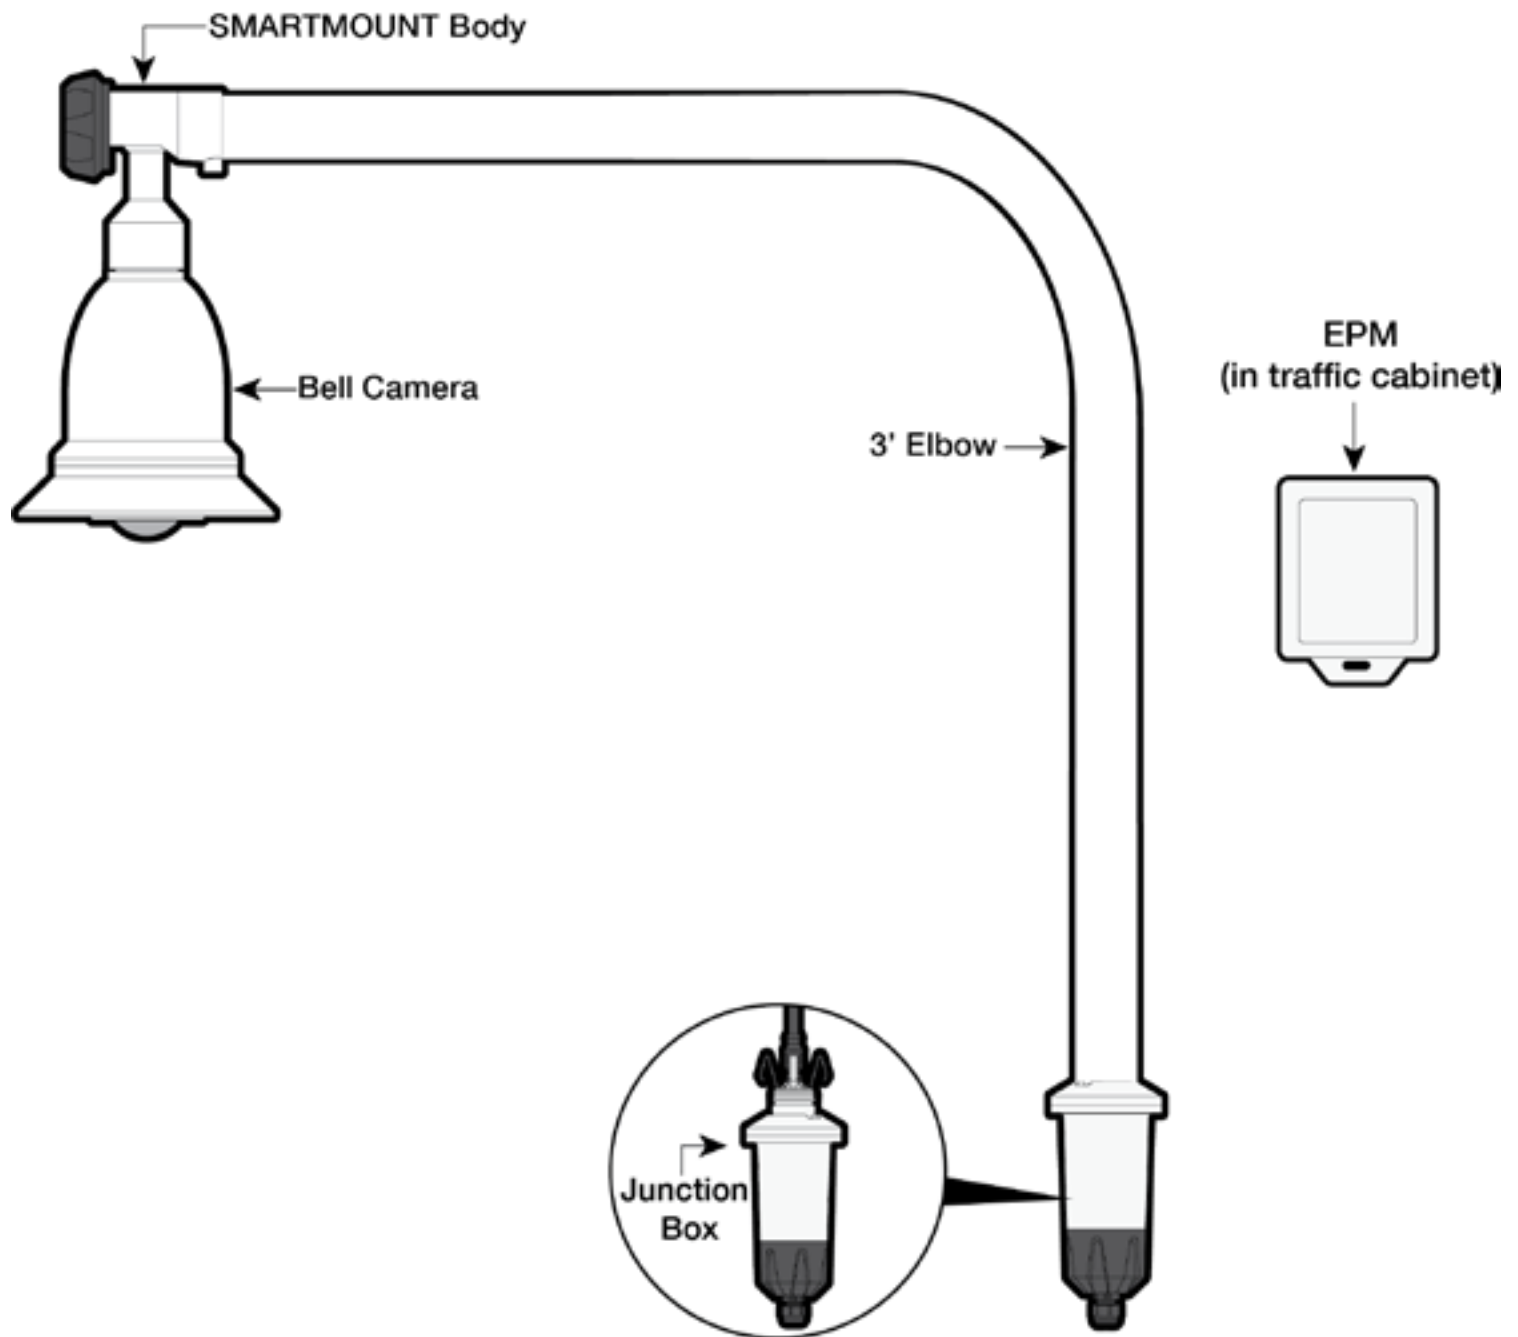

Updated 1/13/20