

SMARTMOUNT X

Part Number: GS-3-SMK-X



SMARTMOUNT X standardizes installations where optimal camera height of 35 feet can not be achieved with the standard SMARTMOUNT. SMARTMOUNT X includes the SMARTMOUNT Bell Camera, Junction Box, mounting components, and Electronic Protection Module (EPM). SMARTMOUNT X does not ship with a pole assembly, and requires the purchase of Pelco part number SP-4133-PNC.

SPECIFICATIONS

BELL CAMERA

Connectivity: M12
Dimensions: 9.4" x 7.95" (23.88 x 20.19 cm)
Weight: 5.6 lbs (2.54 kg)
Cable Length: 20.6' (6.3 m) for PELCO Pole Assembly Only

JUNCTION BOX

Connectivity: M12 (to Camera)
RJ-45 CAT5e (to Processor)
Dimensions: 9.5" x 3.5" x 3.5" (24.13 x 8.89 x 8.89 cm)
Weight: 0.7 lbs (0.32 kg)
ABA Material: Polycarbonate/ASA blend,
UV Stabilized
Environmental: -29° F to 165° F (-34° C to 74° C)
Rated: IP66

MOUNTING KIT

Weight: 2.75 lbs (1.25 kg)
(2 lbs camera mounting hardware and screws, 0.75 lbs cable)

POLE ASSEMBLY


Dimensions: 15' x 5' (45.7 x 1.52 m)
Weight: 25.3 lbs (11.5 kg)
Material: Schedule 80 aluminum bent pipe with
Schedule 40 end



Pole Assembly Purchase required from PELCO: part number SP-4133-PNC.

SMARTMOUNT X OVERVIEW

Part Number: GS-3-SMK-X

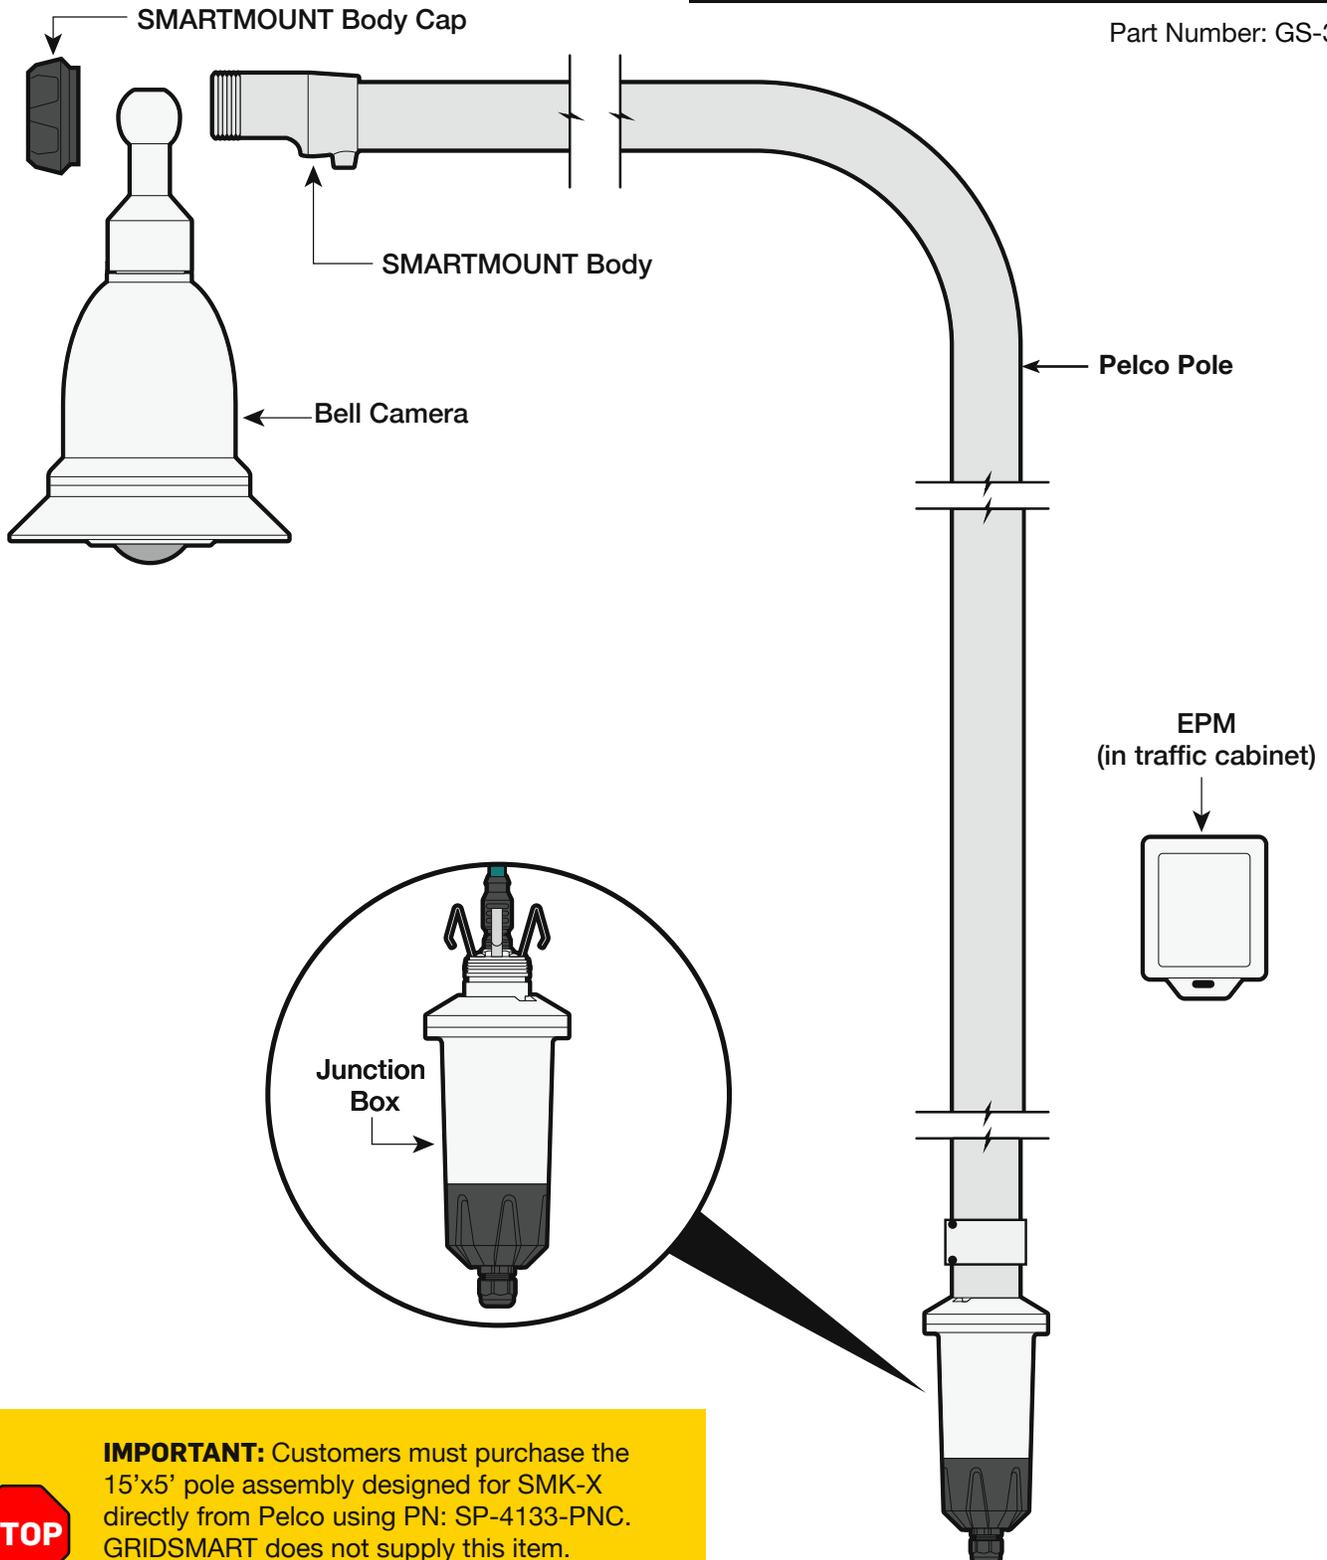

IMPORTANT: Customers must purchase the 15'x5' pole assembly designed for SMK-X directly from Pelco using PN: SP-4133-PNC. GRIDSMART does not supply this item. Customers will need to communicate directly with Pelco on availability and lead times.