



Xsite Overview	➤ See page 116
Power & Data Overview	146
Product Information	163
Application Guidelines	152

Details




Power/data tiles provide access to power and data at the 2nd, 3rd, 4th or 5th segments. They utilize the same wiring configuration as the used in the base wireway, either 10-wire shared neutral or 10-wire independent neutral.

➤ See pages 152–155 for circuit configurations and wiring diagrams.



Flexible material on both ends allows excess cables to be stored inside the frame interior. Not accessible when in-line with a frame vertical.



Four cut-outs are provided in each power/data tile to accommodate a combination of four duplex receptacles and/or data ports.

Finishes & Materials

- Tile: formed steel, paint
- Trim plates and cover plates: black plastic

Connections

Power/data tiles may be powered with a ceiling infeed to provide belt line power throughout the system without extending to the base.

Power/data tile may be placed horizontally at any location on the frame provided the distribution block bracket does not conflict with the frame. Tiles should not be placed at the end of a panel run or aligned with frame verticals because the full functionality of accessing the frame interior for cable management is not realized.

Special power/data tile components are specified separately to bring and distribute power to the tile.

➤ See page 163 for product info.


➤ See page 164 for application guidelines.

Planning Factors



Power/data tiles may be placed back to back, provided the power and/or data components are not back to back. Power/data tiles cannot be placed back to back with technology tiles or storage tiles since both tiles use the interior space of the frame.

Place power/data tiles in frames wider than the tile to allow access to cable manager.



Consider the tile below a power/data tile in base entry applications. The jumper needs to pass from the base through the interior of the frame to the tile; therefore, storage tiles or any tiles where the jumper may be visible are not recommended.

One receptacle at the base will be used to connect the power/data tile.

Data cabling can be routed from the top, bottom, or sides. Top or bottom feed provides the least amount of conflict with opposing tiles. Specify data ports through the communications supplier or their distribution network.

Hardwire applications can be accommodated.

Related Products






Power/data tile electrical components

➤ See page 163.

➤ See page 164 for jumper application guidelines.

Technology tile electrical components cannot be used with power/data tiles.


Interior Dimensions:

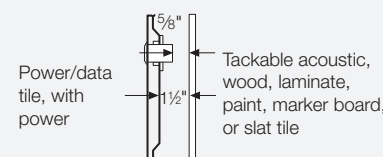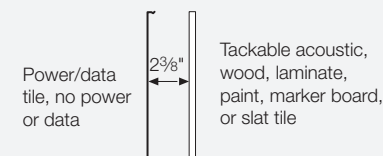


Details

Power/data tile components are required to provide power access to the power/data tile. They utilize the same wiring configuration as the used in the base wireway, either 10-wire shared neutral or 10-wire independent neutral.


➤ See pages 152–155 for circuit configurations and wiring diagrams.




Mid-distribution block bracket snaps into the power/data tile to hold two mid-distribution blocks.




Mid-distribution block screws to the mid-distribution block bracket and accepts one duplex receptacle and up to three jumpers.



Base wireway panel-to-panel jumper (36PEJB1) is used to connect two vertically adjacent receptacles.



Mid-block jumper passes power horizontally between two power/data tiles, between two sets of vertically adjacent receptacles, or to connect back-to-back tiles with staggered receptacle locations.



Base-to-power/data tile jumper passes power from base wireway harness to mid-distribution block in power/data tile. Two lengths available, one for power/data tiles located in the 2nd segment, and one for the 3rd or 4th segment. When connecting two power/data tiles across a vertical, a metal tile (up to 36"W) must be used to allow sufficient space for the jumpers.

Finishes & Materials

- Mid-distribution block: injection-molded plastic
- Mid-distribution block bracket: formed steel
- Mid-block jumper: injection-molded plastic ends; mesh sleeving
- Base-to-power/data tile jumper: injection-molded plastic ends; 3/4" oval metal conduit

Planning Factors

Independent and shared neutral components cannot be mixed.

Power/data tile accepts one to four mid-distribution blocks and one to two mid-distribution block brackets. Blocks should be placed where duplex receptacles are required.

IMPORTANT: Specific guidelines apply to power/data tile jumper connections.

➤ See page 164.

IMPORTANT: Technology tile electrical components cannot be used with power/data tiles.

Related Products

Power/data tiles

➤ See page 162 for product information.

➤ See page 232 to specify.

Selecting Jumpers

Key:


- = Mid-Block Jumper
- = Base Wireway Panel-Panel Jumper
- = Base Wireway Pass-Thru Jumper
- - - = Base to Power/Data Tile Jumper

Note: Illustrations intended to show applications, not actual dimensions.


IMPORTANT: Power cannot be passed through connectors. If there is a connector between power/data tiles, power must be brought up from the base for each tile next to the connector.

IMPORTANT: Power cannot be jumped between power/data tiles if they are separated by a different tile type, except an embossed metal tile (see continuous beltline at right).

One Side of a Run:




Use a base wireway panel-to-panel jumper (36PEJB1) to connect two vertically adjacent receptacles.



Use base wireway panel-to-panel jumper to connect two vertically adjacent receptacles and a mid-block jumper to pass power horizontally between sets.

Back-to-Back:




Use mid-block jumper to connect back-to-back tiles with staggered receptacle locations. Two receptacles per side only. Use base wireway pane-to-panel jumper to connect two vertically adjacent receptacles.




IMPORTANT Mid-distribution blocks and brackets must be staggered side to side when using power/data tiles opposite each other (back to back).

Adjacent on Opposite Side:



Use base wireway panel-to-panel jumper to connect two vertically adjacent receptacles; use a base wireway pass-thru jumper to connect tiles that are adjacent (not back to back) on opposite sides of the run (see tile-to-tile option 2 for size).

Continuous Beltline:



Use a base pass-thru jumper to connect two inside mid-block distribution blocks.


Tile	Specify Jumper Model
24"W	36P36EPT
30"W	36P42EPT
36"W	36P48EPT

Tile separating the power/data tiles must be embossed metal. The frame vertical must be at least 3" from the end of the metal tile.

If metal tile exceeds 36"W, there is no standard-size jumper available.


Tile-to-Tile:

Option 1—



Use base wireway panel-to-panel jumper to connect two vertically adjacent receptacles; use a mid-block jumper to pass power horizontally between tiles.


Option 2—



Use base wireway panel-to-panel jumper to connect two vertically adjacent receptacles; use a base wireway pass-thru jumper to connect non-adjacent receptacles.

Tile 1	Tile 2	Pass-Thru Jumper Model
30"W	30"W	36P30EPT
30"W	36"W	36P36EPT
36"W	36"W	36P42EPT

Option 3—




Use base wireway panel-to-panel jumper to connect two vertically adjacent receptacles; use a base wireway pass-thru jumper to connect non-adjacent receptacles.


Tile 1	Tile 2	Pass-Thru Jumper Model
30"W	30"W	36P36EPT
30"W	36"W	36P42EPT
36"W	36"W	36P48EPT

Xsite Overview	➤ See page 116
Power & Data Overview	146
Product Information	163
Application Guidelines	166


Details



Data cable manager manages up to twelve 1/4" cables per side within the frame's interior.



Vertical cable manager manages cables in vertical application and conceals up to two task light cords.



Space between frame and tile is 1/4", allowing cables to pass horizontally across verticals.


Finishes & Materials

- Data cable manager: polypropylene
- Vertical cable manager: fabric

Connections

Data cable managers can be located at any point up and down the frame's vertical elements.

Planning Factors

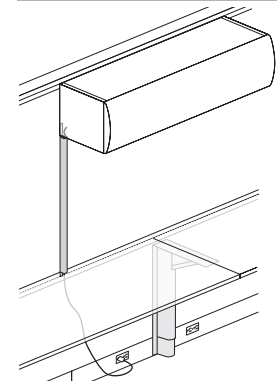


Plan for vertical cable manager to be located at the end of the cabinet. Specify the appropriate size vertical cable manager based on the space between the cabinet and worksurface below.

Cables may enter the frame through a base wireway cover or through a ceiling power/data pole.


Cables may be routed through the frame in the top channel, at the bottom of the frame above the base wireway, or through the interior of the frame.

Ceiling Entry:



Ceiling entry applications utilize a power/data pole. Pole features a divided septum to separate power and data cables. Cables are distributed in the top channel of the frame and dropped down for access in power/data tiles or in the base wireway.


Base Entry:




In base entry applications, cables enter through the data opening in a base wireway cover (power and data access model). Cables are routed up to the top channel or a power/data tile.

Allow an additional 12' of cable when routing up to the top channel from the base entry.

Horizontal Routing:



Data cable manager guides cables between frame and tiles. Up to 12 1/4"-diameter cables can be accommodated on each side of the frame. Locate as many as required on the frame verticals.



Cables in top channel can be routed through connectors. Top channel is 1 3/4"W and 1 1/4"H.

- See chart at right for cable capacity.
- See chart at left for bend radius.

Hi-Lo Applications:

When cabling is distributed in a run with a hi-lo condition, the cabling must go into the frame, pass across the hi-lo condition, and then route back to the top of the frame.

Cable Capacities:

Capacities listed below are for 1/4"-diameter cables at 40% fill. Actual capacities may vary. A substantial number of cables can also be accommodated between the frame and tiles.

	40% Fill
Top channel	36
Top channel and mid-frame support cut-out	30
Power/data pole:	
• With power	46
• Without power	50
• Per segment	25
Power/data pole to top of frame, each direction	14
Connector top cap	
• Paint:	24
• Wood	24

Bend Radius:




	Min.	Max.
Top channel at connector	1"	1 3/8"
Through frame at connector	1"	1 5/8"
Frame to wireway	1"	2 1/8"
Top channel to inside frame	1"	2"
Power/data pole to top channel	1"	2"

Base-Wireway Frames

2-High, 3-High, and 3.5-High

Pricing

GSA SIN 711-1



<i>D</i>	<i>W</i>	<i>H</i>	<i>Model</i>	<i>Powered</i>	<i>Non-Powered</i>
2-High Frames					
3¼"	18"	29½"	36P182F	—	\$153
	24"		36P242F	\$315	164
	30"		36P302F	325	174
	36"		36P362F	332	184
	42"		36P422F	347	194
	48"		36P482F	356	204
3-High Frames					
3¼"	18"	42⅛"	36P183F	—	\$188
	24"		36P243F	\$352	202
	30"		36P303F	367	217
	36"		36P363F	382	232
	42"		36P423F	397	247
	48"		36P483F	411	262
3.5-High Frames					
3¼"	18"	49½"	36P18H50F	—	\$202
	24"		36P24H50F	\$363	214
	30"		36P30H50F	380	228
	36"		36P36H50F	393	244
	42"		36P42H50F	410	258
	48"		36P48H50F	424	273

Mid-frame supports are required wherever Xsite Traxx are used to support tiles and/or overheads. Mid-frame supports can be relocated or additional mid-frame supports may need to be specified separately.

➤ See page 117 for planning factors.

➤ See page 173 to specify.

IMPORTANT: 18"W panels do not accept power entry or receptacles.

For hardwire applications, specify non-powered frame and hardwire electrical components separately.

Features	➤ See page 116
Product Information	117
Application Guidelines	130
Power & Data Overview	146

Standard Includes

- Frame
- Attachment hardware
- Mid-frame supports at 2-high position on 3-high and 3.5-high frames
- Wireway covers
- Base wireway harness on powered frames

Note: To complete the panel, specify Xsite Traxx, tiles, and top cap separately.

How to Specify


- ① Model
- ② Power option:
P = Powered
N = Non-powered
- ③ Type of power system (omit for non-powered):
10S = Shared neutral
10D = Independent neutral
- ④ Wireway cover punch option (omit for 18"W):
 ➤ See page 146 for designators.
- ⑤ Wireway cover finish group:
STD = Group 1
STD M = Group M (+10%)
- ⑥ Wireway cover finish designator

Base-Wireway Frames

Pricing

4-High and 5-High

GSA SIN 711-1



D	W	H	Model	Powered	Non-Powered
4-High Frames					
3 1/4"	18"	54 ^{23/32} "	36P184F	—	\$208
	24"		36P244F	\$370	220
	30"		36P304F	386	236
	36"		36P364F	402	250
	42"		36P424F	418	266
	48"		36P484F	432	283
5-High Frames					
3 1/4"	18"	67 ^{5/16} "	36P185F	—	\$241
	24"		36P245F	\$410	260
	30"		36P305F	429	279
	36"		36P365F	452	300
	42"		36P425F	471	320
	48"		36P485F	489	337

Mid-frame supports are required wherever Xsite Traxx are used to support tiles and/or overheads. Use of an overhead on a 4-high frame requires the relocation of the mid-frame support. Additional mid-frame supports may need to be specified separately.

➤ See page 117 for planning factors.

➤ See page 173 to specify.

IMPORTANT: 18"W panels do not accept power entry or receptacles.

For hardwire applications, specify non-powered frame and hardwire electrical components separately.

Features	➤ See page 116
Product Information	117
Application Guidelines	130
Power & Data Overview	146

Standard Includes

- Frame
- Attachment hardware
- Mid-frame supports:
 - At 2-high position on 4-high frames
 - At 2-high and 4-high positions on 5-high frames
- Wireway covers
- Base wireway harness on powered frames

Note: To complete the panel, specify Xsite Traxx, tiles, and top cap separately.

How to Specify




- ① Model
- ② Power option:
P = Powered
N = Non-powered
- ③ Type of power system (omit for non-powered):
10S = Shared neutral
10D = Independent neutral
- ④ Wireway cover punch option (omit for 18"W):
 ➤ See page 146 for designators.
- ⑤ Wireway cover finish group:
STD = Group 1
STDM = Group M (+10%)
- ⑥ Wireway cover finish designator

Open-Base Frames

2-High, 3-High, and 3.5-High

Pricing

GSA SIN 711-1



<i>D</i>	<i>W</i>	<i>H</i>	<i>Model</i>	<i>Price</i>
2-High Frames				
3 ¹ / ₄ "	18"	29 ¹ / ₂ "	36P182FNOB	\$160
	24"		36P242FNOB	171
	30"		36P302FNOB	184
	36"		36P362FNOB	193
	42"		36P422FNOB	204
	48"		36P482FNOB	215
3-High Frames				
3 ¹ / ₄ "	18"	42 ¹ / ₈ "	36P183FNOB	\$196
	24"		36P243FNOB	213
	30"		36P303FNOB	228
	36"		36P363FNOB	244
	42"		36P423FNOB	259
	48"		36P483FNOB	276
3.5-High Frames				
3 ¹ / ₄ "	18"	49 ¹ / ₃₂ "	36P18H50FNOB	\$213
	24"		36P24H50FNOB	224
	30"		36P30H50FNOB	239
	36"		36P36H50FNOB	257
	42"		36P42H50FNOB	269
	48"		36P48H50FNOB	288

Mid-frame supports are required wherever Xsite Traxx are used to support tiles and/or overheads. Mid-frame supports can be relocated or additional mid-frame supports may need to be specified separately.
 ➤ See page 117 for planning factors.
 ➤ See page 173 to specify.

Features	➤ See page 116
Product Information	117
Application Guidelines	130
Power & Data Overview	146

Standard Includes

- Frame
- Attachment hardware
- Mid-frame supports at 2-high position on 3-high and 3.5-high frames

Note: To complete the panel, specify Xsite Traxx, tiles, and top cap separately.

How to Specify


- ① Model
- ② Frame finish group:
STD = Group 1
STD M = Group M (+10%)
- ③ Frame finish designator

Open-Base Frames

4-High and 5-High

Pricing

GSA SIN 711-1



<i>D</i>	<i>W</i>	<i>H</i>	<i>Model</i>	<i>Price</i>
4-High Frames				
3 1/4"	18"	54 ²³ / ₃₂ "	36P184FNOB	\$220
	24"		36P244FNOB	230
	30"		36P304FNOB	248
	36"		36P364FNOB	262
	42"		36P424FNOB	281
	48"		36P484FNOB	296
5-High Frames				
3 1/4"	18"	67 ⁵ / ₁₆ "	36P185FNOB	\$255
	24"		36P245FNOB	272
	30"		36P305FNOB	292
	36"		36P365FNOB	316
	42"		36P425FNOB	335
	48"		36P485FNOB	356

Mid-frame supports are required wherever Xsite Traxx are used to support tiles and/or overheads. Use of an overhead on a 4-high frame requires the relocation of the mid-frame support. Additional mid-frame supports may need to be specified separately.

➤ See page 117 for planning factors.

➤ See page 173 to specify.

Features	➤ See page 116
Product Information	117
Application Guidelines	130
Power & Data Overview	146

Standard Includes

- Frame
- Attachment hardware
- Mid-frame supports:
 - At 2-high position on 4-high frames
 - At 2-high and 4-high positions on 5-high frames

Note: To complete the panel, specify Xsite Traxx, tiles, and top cap separately.

How to Specify



- ① Model
- ② Frame finish group:
 - STD** = Group 1
 - STD M** = Group M (+10%)
- ③ Frame finish designator

To-the-Floor Frames

2-High, 3-High, and 3.5-High

Pricing

GSA SIN 711-1



<i>D</i>	<i>W</i>	<i>H</i>	<i>Model</i>	<i>Price</i>
2-High Frames				
3 1/4"	18"	29 1/2"	36P182FNF	\$167
	24"		36P242FNF	179
	30"		36P302FNF	192
	36"		36P362FNF	202
	42"		36P422FNF	214
	48"		36P482FNF	225
3-High Frames				
3 1/4"	18"	42 1/8"	36P183FNF	\$206
	24"		36P243FNF	223
	30"		36P303FNF	238
	36"		36P363FNF	257
	42"		36P423FNF	270
	48"		36P483FNF	289
3.5-High Frames				
3 1/4"	18"	49 1/32"	36P18H50FNF	\$223
	24"		36P24H50FNF	234
	30"		36P30H50FNF	251
	36"		36P36H50FNF	268
	42"		36P42H50FNF	284
	48"		36P48H50FNF	300

Mid-frame supports are required wherever Xsite Traxx are used to support tiles and/or overheads. Mid-frame supports can be relocated or additional mid-frame supports may need to be specified separately.

➤ See page 117 for planning factors.

➤ See page 173 to specify.

Features	➤ See page 116
Product Information	117
Application Guidelines	130
Power & Data Overview	146

Standard Includes

- Frame
- Attachment hardware
- Mid-frame supports at 2-high position on 3-high and 3.5-high frames

Note: To complete the panel, specify Xsite Traxx, tiles, and top cap separately.

How to Specify


- 1 Model

To-the-Floor Frames

4-High and 5-High

Pricing

GSA SIN 711-1



D	W	H	Model	Price
4-High Frames				
3 1/4"	18"	54 ²³ / ₃₂ "	36P184FNF	\$229
	24"		36P244FNF	240
	30"		36P304FNF	260
	36"		36P364FNF	274
	42"		36P424FNF	294
	48"		36P484FNF	312
5-High Frames				
3 1/4"	18"	67 ⁵ / ₁₆ "	36P185FNF	\$265
	24"		36P245FNF	286
	30"		36P305FNF	305
	36"		36P365FNF	331
	42"		36P425FNF	352
	48"		36P485FNF	371

Mid-frame supports are required wherever Xsite Traxx are used to support tiles and/or overheads. Use of an overhead on a 4-high frame requires the relocation of the mid-frame support. Additional mid-frame supports may need to be specified separately.

➤ See page 117 for planning factors.

➤ See page 173 to specify.

Features	➤ See page 116
Product Information	117
Application Guidelines	130
Power & Data Overview	146

Standard Includes

- Frame
- Attachment hardware
- Mid-frame supports:
 - At 2-high position on 4-high frames
 - At 2-high and 4-high positions on 5-high frames

Note: To complete the panel, specify Xsite Traxx, tiles, and top cap separately.

How to Specify

- 1 Model

Mid-Frame Supports

Pricing

GSA SIN 711-1



<i>W</i>	<i>Model</i>	<i>Price</i>
Mid-Frame Supports		
18"	36P18MFS	\$28
24"	36P24MFS	32
30"	36P30MFS	36
36"	36P36MFS	42
42"	36P42MFS	53
48"	36P48MFS	58

Features	➤ See page 116
Product Information	117
Application Guidelines	130
Power & Data Overview	146

Standard Includes

- Mid-frame support

How to Specify

- 1 Model

Mid-frame supports are required wherever Traxx are used to support tiles. Mid-frame supports that are included with frames can be relocated. Specify additional mid-frame supports if needed.

3"W Extenders

For Use with Base-Wireway Frames


Pricing

GSA SIN 711-1




<i>D</i>	<i>W</i>	<i>H</i>	<i>Model</i>	<i>Price</i>
2-High				
3 ¹ / ₄ "	3"	29 ¹ / ₂ "	36P032EK	\$119
3-High				
3 ¹ / ₄ "	3"	42 ¹ / ₈ "	36P033EK	\$125
3.5-High				
3 ¹ / ₄ "	3"	49	36P03H50EK	\$129
4-High				
3 ¹ / ₄ "	3"	54 ²³ / ₃₂ "	36P034EK	\$131
5-High (shown)				
3 ¹ / ₄ "	3"	67 ⁵ / ₁₆ "	36P035EK	\$137


Application Types:



EF
End trim–
Extender–
Frame



E
Frame–
Extender–
Connector



I
Frame–
Extender–
Frame

Traxx, tiles, and top caps should be specified to span across the frame and the extender.

Specify "EF" for application type if extender will be used at the end of a panel run next to an end trim or a connector. Specify "E" if extender will be used next to a connector. Specify "I" if extender will be used between two in-line frames.

Features	➤ See page 116
Product Information	117
Application Guidelines	130
Power & Data Overview	146

Standard Includes

- Extender
- Wireway cover
- Attachment hardware

How to Specify


- ① Model
- ② Wireway cover finish group:
STD = Group 1
STDM = Group M (+10%)
- ③ Wireway cover finish designator
- ④ Application type:
EF = End
E = Connector
I = In-line

Off-Module Frames

Pricing

Base Wireway

GSA SIN 711-1



Specify tiles and top caps separately.

Mid-frame supports are required wherever Traxx are used to support tiles. Mid-frame supports that are included can be relocated. Specify additional mid-frame supports if needed.

➤ See page 173.

Loadbearing applications require off-module frame to be equal to the loadbearing height of spine run.

In non-loadbearing applications, off-module frame may be equal to, or shorter than, the height of spine run.

Off-module frame must tie into a minimum of two Xsite Traxx—one in the top position.

Specify an adjustable wall mount channel to fill the gap below a lower wall-mounted Traxx if off-module frame will be exposed.

➤ See page 188.

<i>D</i>	<i>W</i>	<i>H</i>	<i>Model</i>	<i>Price</i>
2-High				
3 ¹ / ₄ "	18"	29 ¹ / ₂ "	36P182FOM	\$188
	24"		36P242FOM	199
	30"		36P302FOM	214
3-High				
3 ¹ / ₄ "	18"	42 ¹ / ₈ "	36P183FOM	\$285
	24"		36P243FOM	300
	30"		36P303FOM	319
3.5-High				
3 ¹ / ₄ "	18"	49"	36P18H50FOM	\$296
	24"		36P24H50FOM	312
	30"		36P30H50FOM	328
4-High				
3 ¹ / ₄ "	18"	54 ²³ / ₃₂ "	36P184FOM	\$303
	24"		36P244FOM	320
	30"		36P304FOM	337
5-High (shown)				
3 ¹ / ₄ "	18"	67 ⁵ / ₁₆ "	36P185FOM	\$299
	24"		36P245FOM	320
	30"		36P305FOM	345

Features	➤ See page 116
Product Information	117
Application Guidelines	130
Power & Data Overview	146

Standard Includes

- Frame
- Top cap splice
- Attachment hardware
- Mid-frame supports
 - At 2-high position on 3-high, 3.5-high, and 4-high frames
 - At 2-high and 4-high positions on 5-high frames
- Wireway covers

How to Specify


- ① Model
- ② Top cap splice finish designator:
Paint color or
501 = Platinum Metallic (+10%)
- ③ Wireway cover punch option (omit for 18"W):
➤ See page 146 for designators.
- ④ Wireway cover finish group:
STD = Group 1
STD M = Group M (+10%)
- ⑤ Wire cover finish designator

Off-Module Frames

Pricing

Open Base

GSA SIN 711-1



<i>D</i>	<i>W</i>	<i>H</i>	<i>Model</i>	<i>Price</i>
2-High Frames				
3 ¹ / ₄ "	18"	29 ¹ / ₂ "	36P182FOMOB	\$196
	24"		36P242FOMOB	208
	30"		36P302FOMOB	224
3-High Frames				
3 ¹ / ₄ "	18"	42 ¹ / ₈ "	36P183FOMOB	\$299
	24"		36P243FOMOB	316
	30"		36P303FOMOB	334
3.5-High Frames				
3 ¹ / ₄ "	18"	49 ¹ / ₃₂ "	36P18H50FOMOB	\$312
	24"		36P24H50FOMOB	327
	30"		36P30H50FOMOB	345
4-High Frames				
3 ¹ / ₄ "	18"	54 ²³ / ₃₂ "	36P184FOMOB	\$319
	24"		36P244FOMOB	335
	30"		36P304FOMOB	356
5-High Frames (shown)				
3 ¹ / ₄ "	18"	67 ⁵ / ₁₆ "	36P185FOMOB	\$315
	24"		36P245FOMOB	335
	30"		36P305FOMOB	361

IMPORTANT: There are specific application guidelines for off-module panels, including panel height and attachment requirements.

➤ See page 118.

Mid-frame supports are required wherever Xsite Traxx are used to support tiles and/or overheads. Mid-frame supports can be relocated or additional mid-frame supports may need to be specified separately.

➤ See page 117 for planning factors.

➤ See page 173 to specify.

Adjustable wall-mount channels

➤ See page 188.

Features	➤ See page 116
Product Information	118
Application Guidelines	130
Power & Data Overview	146

Standard Includes

- Top cap splice
- Attachment hardware
- Mid-frame supports:
 - At 2-high position on 3-high, 3.5-high, and 4-high frames
 - At 2-high and 4-high positions on 5-high frames

Note: To complete the panel, specify Xsite Traxx, tiles, and top cap separately.

How to Specify


- ① Model
- ② Top cap splice finish designator:
Paint color or
501 = Platinum Metallic (+10%)
- ③ Frame finish group:
STD = Group 1
STD M = Group M (+10%)
- ④ Frame finish designator

Off-Module Frames

To-the-Floor

Pricing

GSA SIN 711-1



<i>D</i>	<i>W</i>	<i>H</i>	<i>Model</i>	<i>Price</i>
2-High Frames				
3 ¹ / ₄ "	18"	29 ¹ / ₂ "	36P182FOMF	\$206
	24"		36P242FOMF	220
	30"		36P302FOMF	234
3-High Frames				
3 ¹ / ₄ "	18"	42 ¹ / ₈ "	36P183FOMF	\$314
	24"		36P243FOMF	331
	30"		36P303FOMF	351
3.5-High Frames				
3 ¹ / ₄ "	18"	49 ¹ / ₃₂ "	36P18H50FOMF	\$326
	24"		36P24H50FOMF	341
	30"		36P30H50FOMF	361
4-High Frames				
3 ¹ / ₄ "	18"	54 ²³ / ₃₂ "	36P184FOMF	\$334
	24"		36P244FOMF	352
	30"		36P304FOMF	371
5-High Frames (shown)				
3 ¹ / ₄ "	18"	67 ⁵ / ₁₆ "	36P185FOMF	\$329
	24"		36P245FOMF	352
	30"		36P305FOMF	378

Mid-frame supports are required wherever Xsite Traxx are used to support tiles and/or overheads. Mid-frame supports can be relocated or additional mid-frame supports may need to be specified separately.

➤ See page 117 for planning factors.

➤ See page 173 to specify.

Connectors

➤ See page 185.

Features	➤ See page 116
Product Information	118
Application Guidelines	130
Power & Data Overview	146

Standard Includes

- Frame
- Top cap splice
- Attachment hardware
- Mid-frame supports:
 - At 2-high position on 3-high, 3.5-high, and 4-high frames
 - At 2-high and 4-high positions on 5-high frames

Note: To complete the panel, specify Xsite Traxx, tiles, and top cap separately.

How to Specify


- ① Model
- ② Top cap splice finish designator:
Paint color or
501 = Platinum Metallic (+10%)

Stacking Frames

1-High and 2-High

Pricing

GSA SIN 711-1



<i>D</i>	<i>W</i>	<i>H</i>	<i>Model</i>	<i>Price</i>
1-High				
3 ¹ / ₄ "	18"	12 ⁵ / ₈ "	36P181FS	\$119
	24"		36P241FS	129
	30"		36P301FS	144
	36"		36P361FS	158
	42"		36P421FS	170
	48"		36P481FS	177
2-High				
3 ¹ / ₄ "	18"	25 ¹ / ₄ "	36P182FS	\$137
	24"		36P242FS	150
	30"		36P302FS	168
	36"		36P362FS	177
	42"		36P422FS	187
	48"		36P482FS	196

One 1-high or 2-high stacking frame can be added to 1-, 2-, 3-, 4-, or 5-high base frame.

Note: Stacking frames cannot be used on 3.5-high base frames.

Specify end trims and connectors to be equal to the combined height of base and stacking frames.

Specify mid-frame supports separately if using Traxx at the 1-high segment on a 2-high stacking frame.
➤ See page 173.

Features	➤ See page 116
Product Information	117
Application Guidelines	130
Power & Data Overview	146

Standard Includes

- Stacking frame
- Attachment hardware

How to Specify

- ① Model

Stacking 3"W Extenders

Pricing

GSA SIN 711-1



<i>D</i>	<i>W</i>	<i>H</i>	<i>Model</i>	<i>Price</i>
1-High				
3 ¹ / ₄ "	3"	12 ⁵ / ₈ "	36P031EKS	\$102
2-High (shown)				
3 ¹ / ₄ "	3"	25 ¹ / ₄ "	36P032EKS	\$109

Application Types:

EF
End trim-
Extender-
Frame

E
Frame-
Extender-
Connector

I
Frame-
Extender-
Frame

Base and stacking extender heights must be equal to the base and stacking frame heights to which they are attached.

Note: Stacking extenders cannot be used on 3.5-high base frames.

Specify top caps, Traxx, and tiles to span across extender.

Specify "EF" for application type if extender will be used at the end of a panel run next to an end trim or a connector. Specify "E" if extender will be used next to a connector. Specify "I" if extender will be used between two in-line frames.

Features	➤ See page 116
Product Information	117
Application Guidelines	130
Power & Data Overview	146

Standard Includes

- Extender


How to Specify

- ① Model
- ② Application type:
 - EF** = End
 - E** = Connector
 - I** = In-line

Stacking Off-Module Frames

Pricing

GSA SIN 711-1



<i>D</i>	<i>W</i>	<i>H</i>	<i>Model</i>	<i>Price</i>
1-High				
3 ¹ / ₄ "	18"	12 ⁵ / ₈ "	36P181FOMS	\$208
	24"		36P241FOMS	221
	30"		36P301FOMS	234
2-High (shown)				
3 ¹ / ₄ "	18"	25 ¹ / ₄ "	36P182FOMS	\$224
	24"		36P242FOMS	237
	30"		36P302FOMS	250

Specify tiles and top caps separately.

Stacking off-module frame must attach to at least one Xsite Traxx in the spine run.

Specify top caps, Traxx, and tiles to span across off-module frames.

Note: Stacking off-module frames cannot be used on 3.5-high base frames.

Specify mid-frame supports separately if using Xsite Traxx at the 1-high segment of a 2-high stacking frame.

Features	➤ See page 116
Product Information	118
Application Guidelines	130
Power & Data Overview	146

Standard Includes

- Frame

How to Specify



- ① Model
- ② Top cap splice finish designator:
Paint color or
501 = Platinum Metallic (+10%)

Sliding Privacy Doors

Non-Locking

Pricing


GSA SIN 711-1



<i>D</i>	<i>W</i>	<i>H</i>	<i>For Use with Opening</i>	<i>For Use with Host Frame</i>	Right-Hand Model	Left-Hand Model	<i>Price</i>
3.5-High							
3/4"	42 1/4"	48 1/2"	36"W	42"W	36P36H50PDR	36P36H50PDL	\$1600
	48 1/4"		42"W	48"W	36P42H50PDR	36P42H50PDL	1649
4-High							
3/4"	42 1/4"	54 1/4"	36"W	42"W	36P364PDR	36P364PDL	\$1634
	48 1/4"		42"W	48"W	36P424PDR	36P424PDL	1685
5-High							
3/4"	42 1/4"	66 7/8"	36"W	42"W	36P365PDR	36P365PDL	\$1653
	48 1/4"		42"W	48"W	36P425PDR	36P425PDL	1702
6-High							
3/4"	42 1/4"	79 3/8"	36"W	42"W	36P366PDR	36P366PDL	\$1735
	48 1/4"		42"W	48"W	36P426PDR	36P426PDL	1788
7-High							
3/4"	42 1/4"	92"	36"W	42"W	36P367PDR	36P367PDL	\$1755
	48 1/4"		42"W	48"W	36P427PDR	36P427PDL	1807

Related Products:

Model				Price
Door Handle				
2"	2"	57/8"	36PPDH	\$86



Left-hand door shown.



Door can be shorter than the host frame, but must have a Traxx for the top guide.
Exception: 3.5H door must be used on a 3.5H frame.

Features	➤ See page 116
Product Information	125
Door Placement	130

Standard Includes

- Door frame: painted aluminum
- Insert: reeded polycarbonate
- Hardware kit:
 - Two medium-hard durometer roller wheels and attachment hardware
 - Top guide assembly: painted steel (same color as frame)
 - Bottom guide with alignment bracket and guide rod: painted steel (same color as frame)

How to Specify

Door

- ① Model
- ② Door material:
T = Translucent
- ③ Door trim paint price group:
STD = Group 1
STD M = Group M (+10%)
- ④ Door trim paint designator

Handle


- ① Model
- ② Paint price group:
STD = Group 1
STD M = Group M (+10%)
- ③ Paint designator

Sliding Privacy Doors

Pricing

Locking

GSA SIN 711-1



Left-hand door shown.

Hardware kit includes:



- Two medium-hard durometer roller wheels and attachment hardware
- Top guide assembly: painted steel (same color as frame)
- Bottom guide with alignment bracket and guide rod: painted steel (same color as frame)

IMPORTANT: Not intended for use as a security door.

Door can be shorter than the host frame, but must have a Traxx for the top guide.

Exception: 3.5H door must be used on a 3.5H frame.

Door handle
➤ See page 181.



<i>D</i>	<i>W</i>	<i>H</i>	<i>For Use with Opening</i>	<i>For Use with Host Frame</i>	Right-Hand Model	Left-Hand Model	<i>Price</i>
3.5-High							
3/4"	42 1/4"	48 1/2"	36"W	42"W	36P36H50PDRL	36P36H50PDLL	\$1914
	48 1/4"		42"W	48"W	36P42H50PDRL	36P42H50PDLL	1960
4-High							
3/4"	42 1/4"	54 1/4"	36"W	42"W	36P364PDRL	36P364PDLL	\$1948
	48 1/4"		42"W	48"W	36P424PDRL	36P424PDLL	1996
5-High							
3/4"	42 1/4"	66 7/8"	36"W	42"W	36P365PDRL	36P365PDLL	1964
	48 1/4"		42"W	48"W	36P425PDRL	36P425PDLL	2015
6-High							
3/4"	42 1/4"	79 3/8"	36"W	42"W	36P366PDRL	36P366PDLL	\$2048
	48 1/4"		42"W	48"W	36P426PDRL	36P426PDLL	2099
7-High							
3/4"	42 1/4"	92"	36"W	42"W	36P367PDRL	36P367PDLL	\$2066
	48 1/4"		42"W	48"W	36P427PDRL	36P427PDLL	2119

Features	➤ See page 116
Product Information	125
Door Placement	130
Locking Information	123

Standard Includes

- Door frame: painted aluminum
- Insert: reeded polycarbonate
- Hardware kit
- End trim with notch for host panel: wood or paint
- Locking mechanism:
 - Lock housing, core, and key (key random)
 - Safety release latch
 - Lock plate and attachment hardware

How to Specify

- Model
- End trim material:
W = Wood **P** = Paint
- Lock option:
KRB = Key random, black core
KRS = Key random, silver core
KSB = Key specific black (-\$24); specify lock core separately
KSS = Key specific silver (-\$24); specify lock core separately
➤ See page 123 for locking information.
- Door material: **T** = Translucent
- Host panel end trim height:
3.5 = 3.5H host panel
4 = 4H host panel
5 = 5H host panel
6 = 6H host panel
7 = 7H host panel
- End trim profile:
C = Curved **F** = Flat
- End trim finish price group:
STD = Group 1
STD M = Group M (+10%)
STD2 = Group 2 (+20%)
- End trim finish designator
- Door trim paint price group:
STD = Group 1
STD M = Group M (+10%)
- Door trim paint designator

Hinged Doors

Pricing

GSA SIN 711-1



Right hinge shown

<i>W</i>	<i>H</i>	<i>Segment</i>	<i>Model</i>	<i>Price</i>
Wood Doors				
36"	92½"	7-high	36P367FADW	\$5523
42"			36P427FADW	5805
Painted Doors				
36"	92½"	7-high	36P367FADP	\$4914
42"			36P427FADP	5156

1-high tiles for each side of frame must be specified separately. Specify 33"W tiles for use with 36"W door and 39"W tiles for use with 42"W door.

➤See page 200.

Specify the hinge location (right or left) so that the door will swing in the correct direction. With a right hinge, door will swing away from you to the right; with a left hinge, door will swing away from you to the left.

Top cap must be specified separately to span across door frame.

➤See page 192.

42"W hinged door is recommended for ADA compliance.

Overview	➤See page 116
Product Information	124
Application Guidelines	130

Standard Includes

- Door: wood or paint (non-metallic)
- Door frame: paint
- Threshold
- Door stop


How to Specify

- 1 Model
- 2 Hinge location:
R = Right
L = Left
- 3 Door hardware:
LL2 = Locking lever (+\$445)
X = No lever
- 4 Frame finish:
STD = Group 1
STDM = Group M (+10%)
- 5 Frame finish designator
- 6 Door finish type:
STD = Group 1
STD2 = Group 2 (+20%)
- 7 Door finish designator

Privacy Panels

Pricing

GSA SIN 711-1
COM GSA Non-Contract



<i>D</i>	<i>W</i>	<i>H</i>	<i>Model</i>	<i>Price</i>	Fabric Price Grade				
					<i>A or COM</i>	<i>B</i>	<i>C</i>	<i>D</i>	<i>E</i>
Fabric									
1¾"	36"	67½"	36P3668PPF	—	\$1493	\$1591	\$1657	\$1759	\$1911
	42"		36P4268PPF	—	1532	1630	1696	1798	1950
Translucent									
1¾"	36"	67½"	36P3668PPT	\$1966	—	—	—	—	—
	42"		36P4268PPT	2008	—	—	—	—	—

When mounting privacy panel in a straight panel run, specify panel to be wider than opening to allow for proper clearance.

Privacy panels are non-handed and reversible. They can be mounted left or right and can be flipped so that different fabrics can be positioned inside or out.

Overview	➤ See page 116
Product Information	125
Application Guidelines	130

Standard Includes

- Privacy panel
- Mounting brackets
- Caster

How to Specify

Fabric

- ① Model
- ② Frame finish designator:
462 = Cinder
501 = Platinum metallic (+10%)
- ③ Side 1 fabric grade
- ④ Side 1 fabric number
- ⑤ Side 2 fabric grade
- ⑥ Side 2 fabric number

Translucent



- ① Model
- ② Frame finish designator:
462 = Cinder
501 = Platinum metallic (+10%)

Connectors

2-Way/L and 3-Way/T

Pricing

GSA SIN 711-1



H	Segment	Model	Connector Material	
			Wood	Paint
2-Way/L (90°)				
29½"	2-high	36P22FCL	\$397	\$166
42⅛"	3-high	36P23FCL	424	179
49"	3.5-high	36P2H50FCL	448	183
54 ²³ / ₃₂ "	4-high	36P24FCL	469	185
67 ⁵ / ₁₆ "	5-high	36P25FCL	484	188
79 ²⁹ / ₃₂ "	6-high	36P26FCL	529	231
92½"	7-high	36P27FCL	566	263
3-Way/T				
29½"	2-high	36P32FCT	\$396	\$181
42⅛"	3-high	36P33FCT	420	187
49"	3.5-high	36P3H50FCT	440	193
54 ²³ / ₃₂ "	4-high	36P34FCT	460	196
67 ⁵ / ₁₆ "	5-high	36P35FCT	467	199
79 ²⁹ / ₃₂ "	6-high	36P36FCT	509	241
92½"	7-high	36P37FCT	538	268

Overview	➤ See page 116
Product Information	126
Application Guidelines	130
Power & Data Overview	146

Standard Includes

- Wireway cover
- Top cap
- Attachment hardware

How to Specify



- 1 Model
- 2 Top cap material:
W = Wood
P = Paint
- 3 Connector material:
W = Wood
P = Paint
- 4 Top cap profile:
C = Curved
F = Flat
- 5 Top cap finish price group:
STD = Group 1
STD_M = Group M (+10%)
STD₂ = Group 2 (+20%)
- 6 Top cap finish designator
- 7 Connector finish price group:
STD = Group 1
STD_M = Group M (+10%*)
STD₂ = Group 2 (+20%*)
**Applies once per model.*
- 8 Connector finish designator

Connectors

4-Way/X and Straight

Pricing

GSA SIN 711-1



H	Segment	Model	Connector Material	
			Wood	Paint
4-Way/X Connector				
29½"	2-high	36P42FCX	\$296	\$193
42⅛"	3-high	36P43FCX	317	199
49"	3.5-high	36P4H50FCX	335	206
54 ²³ / ₃₂ "	4-high	36P44FCX	354	213
67 ⁵ / ₁₆ "	5-high	36P45FCX	356	215
79 ²⁹ / ₃₂ "	6-high	36P46FCX	391	257
92½"	7-high	36P47FCX	411	284
Straight Connector				
29½"	2-high	36P12FCS	\$397	166
42⅛"	3-high	36P13FCS	424	179
49"	3.5-high	36P1H50FCS	448	183
54 ²³ / ₃₂ "	4-high	36P14FCS	469	185
67 ⁵ / ₁₆ "	5-high	36P15FCS	484	188
79 ²⁹ / ₃₂ "	6-high	36P16FCS	529	231
92½"	7-high	36P17FCS	566	263

Overview	➤ See page 116
Product Information	126
Application Guidelines	130
Power & Data Overview	146

Standard Includes

- Wireway cover
- Top cap
- Attachment hardware

How to Specify

- 1 Model
- 2 Top cap material:
W = Wood
P = Paint
- 3 Connector material
(omit for 4-way/X connector):
W = Wood
P = Paint
- 4 Top cap profile:
C = Curved
F = Flat
- 5 Top cap finish price group:
STD = Group 1
STDM = Group M (+10%)
STD2 = Group 2 (+20%)
- 6 Top cap finish designator
- 7 Connector finish price group:
STD = Group 1
STDM = Group M (+10%*)
STD2 = Group 2 (+20%*)
*Applies once per model.
- 8 Connector finish designator

Connectors

2-Way/V and 3-Way/Y

Pricing

GSA SIN 711-1



H	Segment	Model	Connector Material	
			Wood	Paint
2-Way/V (120°)				
29½"	2-high	36P22FCV	\$397	\$266
42⅛"	3-high	36P23FCV	424	288
49"	3.5-high	36P2H50FCV	448	305
54 ²³ / ₃₂ "	4-high	36P24FCV	469	325
67 ⁵ / ₁₆ "	5-high	36P25FCV	484	325
79 ²⁹ / ₃₂ "	6-high	36P26FCV	529	362
92½"	7-high	36P27FCV	566	381
3-Way/Y (120°)				
29½"	2-high	36P32FCY	\$396	\$284
42⅛"	3-high	36P33FCY	420	301
49"	3.5-high	36P3H50FCY	440	324
54 ²³ / ₃₂ "	4-high	36P34FCY	460	341
67 ⁵ / ₁₆ "	5-high	36P35FCY	467	341
79 ²⁹ / ₃₂ "	6-high	36P36FCY	509	377
92½"	7-high	36P37FCY	540	397

Overview	➤ See page 116
Product Information	126
Application Guidelines	130
Power & Data Overview	146

Standard Includes

- Wireway cover
- Top cap
- Attachment hardware

How to Specify


- 1 Model
- 3 Top cap material:
W = Wood
P = Paint
- 3 Connector material:
W = Wood
P = Paint
- 4 Top cap profile:
C = Curved
F = Flat
- 5 Top cap finish price group:
STD = Group 1
STD M = Group M (+10%)
STD2 = Group 2 (+20%)
- 6 Top cap finish designator
- 7 Connector finish price group:
STD = Group 1
STD M = Group M (+10%*)
STD2 = Group 2 (+20%*)
**Applies once per model.*
- 8 Connector finish designator

Connectors

Pricing

Adjustable Wall-Mount Channels


GSA SIN 711-1



<i>W</i>	<i>H</i>	<i>Segment</i>	<i>Model</i>	<i>Price</i>
Adjustable Wall-Mount Channels				
33 ³ / ₈ "	29 ¹ / ₂ "	2-high	36P2FCW	\$86
	42 ¹ / ₈ "	3-high	36P3FCW	89
	49"	3.5-high	36PH50FCW	92
	54 ²³ / ₃₂ "	4-high	36P4FCW	93
	67 ⁵ / ₁₆ "	5-high	36P5FCW	97
	79 ²⁹ / ₃₂ "	6-high	36P6FCW	104
	92 ¹ / ₂ "	7-high	36P7FCW	109

Related Products:

<i>Model</i>	<i>Description</i>	<i>Price</i>
Top Cap Splice for Curved Profile Top Caps		
36PTCOMSP	Use to fill the gap between curved profile top caps in off-module and in-line applications or to cover the top of an adjustable wall-mount channel in wall-mount applications. Must be specified separately for in-line and wall mount applications. Included with off-module frames.	\$7



Wall-mount

Specify top cap splice separately to cover the top of an adjustable wall-mount channel when using a curved profile top cap.

Specify top cap one size larger and field scribe to cover the adjustable wall-mount channel and frame when using a flat profile top cap.

Overview	➤ See page 116
Product Information	126
Application Guidelines	130
Power & Data Overview	146

Standard Includes

- U channel: painted steel


How to Specify

Wall-Mount Channel


- ① Model
- ② Finish type:
STD = Group 1
STDM = Group M (+10%)
- ③ Finish designator

Top Cap Splice

- ① Model
- ② Finish designator:
 Paint color or
501 = Platinum Metallic (+10%)



Curved Profile



Flat Profile

H	Segment	Model	Flat Profile		Curved Profile	
			Wood (W)	Paint (P)	Wood (W)	Paint (P)
End Trim						
29½"	2-high	36P2ETC	\$153	\$101	\$125	\$85
42⅛"	3-high	36P3ETC	168	109	137	91
49⅓"	3.5-high	36PH50ETC	185	115	153	94
54 ²³ / ₃₂ "	4-high	36P4ETC	202	119	166	97
67 ⁵ / ₁₆ "	5-high	36P5ETC	220	125	181	102
79 ²⁹ / ₃₂ "	6-high	36P6ETC	262	143	215	119
92½"	7-high	36P7ETC	288	159	234	131

Overview	➤ See page 116
Product Information	128
Application Guidelines	130
Power & Data Overview	146

Standard Includes

- End trim
- Attachment brackets

How to Specify


- ① Model
- ② Material:
W = Wood
P = Paint
- ③ Trim profile:
C = Curved
F = Flat
- ④ End trim finish type:
STD = Group 1
STDM = Group M (+10%)
STD2 = Group 2 (+20%)
- ⑤ End trim finish designator

Hi-Lo Vertical Trim

Pricing

Panel-to-Panel

GSA SIN 711-1



H	Segment	Model	Flat Profile		Curved Profile	
			Wood (W)	Paint (P)	Wood (W)	Paint (P)
For Use with 1-, 2-, 3-, 4-, and 5-High Frames						
12 ¹⁵ / ₁₆ "	1-high	36P1HSC	\$158	\$65	\$130	\$55
25 ¹ / ₂ "	2-high	36P2HSC	183	72	150	61
38 ¹ / ₈ "	3-high	36P3HSC	197	78	161	65
50 ¹¹ / ₁₆ "	4-high	36P4HSC	213	86	174	69
63 ⁵ / ₁₆ "	5-high	36P5HSC	232	91	190	72
For Use with 3.5-High Base Frames						
6"	from 3.5-high to 4-high	36PH06HSC	\$127	\$52	\$104	\$41
7 ⁵ / ₁₆ "	from 3.5-high to 3-high	36PH07HSC	127	52	104	41
18 ⁵ / ₈ "	from 3.5-high to 5-high	36PH18HSC	146	60	121	48
19 ⁷ / ₈ "	from 3.5-high to 2-high	36PH19HSC	146	60	121	48

Overview	➤ See page 116
Product Information	128
Application Guidelines	130
Power & Data Overview	146

Standard Includes

- One vertical trim: wood or paint

How to Specify


- ① Model
- ② Material:
W = Wood
P = Paint
- ③ Top cap:
C = Curved
F = Flat
- ④ End trim finish type:
STD = Group 1
STD_M = Group M (+10%)
STD₂ = Group 2 (+20%)
- ⑤ End trim finish designator

Hi-Lo Vertical Trim


Connector-to-Panel

Pricing

GSA SIN 711-1



Flat Profile



Curved Profile

H	Segment	Model	Flat Profile		Curved Profile	
			Wood (W)	Paint (P)	Wood (W)	Paint (P)
For Use with 1-, 2-, 3-, 4-, and 5-High Frames						
12 ¹⁵ / ₁₆ "	1-high	36P1HTC	\$159	\$65	\$131	\$55
25 ¹ / ₂ "	2-high	36P2HTC	184	72	151	61
38 ¹ / ₈ "	3-high	36P3HTC	199	78	164	65
50 ¹¹ / ₁₆ "	4-high	36P4HTC	215	87	176	70
63 ⁵ / ₁₆ "	5-high	36P5HTC	233	92	191	74
For Use with 3.5-High Base Frames						
6"	from 3.5-high to 4-high	36PH06HTC	\$128	\$52	\$105	\$41
7 ⁵ / ₁₆ "	from 3.5-high to 3-high	36PH07HTC	128	52	105	41
18 ⁵ / ₈ "	from 3.5-high to 5-high	36PH18HTC	148	60	122	48
19 ⁷ / ₈ "	from 3.5-high to 2-high	36PH19HTC	148	60	122	48

Overview	➤ See page 116
Product Information	128
Application Guidelines	130
Power & Data Overview	146

Standard Includes

- One vertical trim: wood or paint


How to Specify

- ① Model
- ② Material:
W = Wood
P = Paint
- ③ Top cap:
C = Curved
F = Flat
- ④ End trim finish type:
STD = Group 1
STD_M = Group M (+10%)
STD₂ = Group 2 (+20%)
- ⑤ End trim finish designator


Top Caps

Pricing

GSA SIN 711-1



Curved Profile



Flat Profile

H	Model	Flat Profile		Curved Profile	
		Wood (W)	Paint (P)	Wood (W)	Paint (P)
Top Caps					
18"	36P18TC	\$94	\$24	\$58	\$15
24"	36P24TC	99	29	64	21
30"	36P30TC	110	33	74	24
36"	36P36TC	120	36	85	27
42"	36P42TC	127	40	91	30
48"	36P48TC	135	41	97	31
54"	36P54TC	139	52	101	36
60"	36P60TC	149	52	109	36
66"	36P66TC	160	61	120	44
72"	36P72TC	169	70	127	55
78"	36P78TC	175	70	132	55
84"	36P84TC	191	77	144	60
90"	36P90TC	203	77	155	60
96"	36P96TC	206	86	158	65

Additional widths in 3" increments not listed in the pricing table at left are available through electronic specification tools.

Top caps for use with frameless glass
➤ See page 197.

Overview	➤ See page 116
Product Information	128
Application Guidelines	130
Power & Data Overview	146

Standard Includes

- Top cap: wood or paint

How to Specify

- ① Model
- ② Material:
W = Wood
P = Paint
- ③ Top cap profile:
C = Curved
F = Flat
- ④ Finish type:
STD = Group 1
STD M = Group M (+10%)
STD2 = Group 2 (+20%)
- ⑤ Finish designator

12"H Frameless Glass

Pricing

Clear Panes

GSA SIN 711-1



D	W	H	Model	Price
Clear Panes				
3/8"	23 7/8"	12"	36P241FG32	\$294
	29 7/8"		36P301FG32	317
	35 7/8"		36P361FG32	341
	41 7/8"		36P421FG32	393
	47 7/8"		36P481FG32	412
	53 7/8"		36P541FG32	478
	59 7/8"		36P601FG32	511
	65 7/8"		36P661FG32	566
	71 7/8"		36P721FG32	618
	77 7/8"		36P781FG32	672
	83 7/8"		36P841FG32	723
	89 7/8"		36P901FG32	777
	95 7/8"		36P961FG32	829
For Use on Lower Panel in a Hi-Lo Application				
3/8"	23 3/8"	12"	36P241FGH3	\$294
	29 3/8"		36P301FGH3	317
	35 3/8"		36P361FGH3	341
	41 3/8"		36P421FGH3	393
	47 3/8"		36P481FGH3	412
	53 3/8"		36P541FGH3	478
	59 3/8"		36P601FGH3	511
	65 3/8"		36P661FGH3	566
	71 3/8"		36P721FGH3	618
	77 3/8"		36P781FGH3	672
	83 3/8"		36P841FGH3	723
	89 3/8"		36P901FGH3	777
	95 3/8"		36P961FGH3	829

IMPORTANT: Frameless glass top cap must be specified separately. Specify pane and top cap to match the width of the panel frame or the combined width of multiple frames to which they will attach.

IMPORTANT: Use 12"H glass pane with top cap with brackets when aligning with an adjacent Xsite frame that is 1H taller; use a 13 3/8"H glass pane with top cap with inset channel in the same application.

Overview	➤ See page 116
Product Information	129
Application Guidelines	130

Standard Includes

- Frameless glass pane: clear, tempered glass

How to Specify


- 1 Model

12"H Frameless Glass

Pricing

Etched Panes

GSA SIN 711-1



<i>D</i>	<i>W</i>	<i>H</i>	<i>Model</i>	<i>Price</i>
Etched Panes				
3/8"	23 7/8"	12"	36P241FG72	\$378
	29 7/8"		36P301FG72	449
	35 7/8"		36P361FG72	520
	41 7/8"		36P421FG72	592
	47 7/8"		36P481FG72	663
	53 7/8"		36P541FG72	701
	59 7/8"		36P601FG72	839
	65 7/8"		36P661FG72	905
	71 7/8"		36P721FG72	976
	77 7/8"		36P781FG72	1052
	83 7/8"		36P841FG72	1123
	89 7/8"		36P901FG72	1201
	95 7/8"		36P961FG72	1272
For Use on Lower Panel in a Hi-Lo Application				
3/8"	23 3/8"	12"	36P241FGH7	\$378
	29 3/8"		36P301FGH7	449
	35 3/8"		36P361FGH7	520
	41 3/8"		36P421FGH7	592
	47 3/8"		36P481FGH7	663
	53 3/8"		36P541FGH7	701
	59 3/8"		36P601FGH7	839
	65 3/8"		36P661FGH7	905
	71 3/8"		36P721FGH7	976
	77 3/8"		36P781FGH7	1052
	83 3/8"		36P841FGH7	1123
	89 3/8"		36P901FGH7	1201
	95 3/8"		36P961FGH7	1272

IMPORTANT: Frameless glass top cap must be specified separately. Specify pane and top cap to match the width of the panel frame or the combined width of multiple frames to which they will attach.

IMPORTANT: Use 12"H glass pane with top cap with brackets when aligning with an adjacent Xsite frame that is 1H taller; use a 13 3/8"H glass pane with top cap with inset channel in the same application.

Overview	➤ See page 116
Product Information	129
Application Guidelines	130

Standard Includes

- Frameless glass pane: etched, tempered glass

How to Specify

- 1 Model

13³/₈"H Frameless Glass

Pricing

Clear Panes

GSA SIN 711-1



<i>D</i>	<i>W</i>	<i>H</i>	<i>Model</i>	<i>Price</i>
Clear Panes				
3 ⁷ / ₈ "	23 ⁷ / ₈ "	13 ³ / ₈ "	36P242FG32	\$320
	29 ⁷ / ₈ "		36P302FG32	342
	35 ⁷ / ₈ "		36P362FG32	367
	41 ⁷ / ₈ "		36P422FG32	419
	47 ⁷ / ₈ "		36P482FG32	438
	53 ⁷ / ₈ "		36P542FG32	530
	59 ⁷ / ₈ "		36P602FG32	563
	65 ⁷ / ₈ "		36P662FG32	617
	71 ⁷ / ₈ "		36P722FG32	670
	77 ⁷ / ₈ "		36P782FG32	723
	83 ⁷ / ₈ "		36P842FG32	800
	89 ⁷ / ₈ "		36P902FG32	854
	95 ⁷ / ₈ "		36P962FG32	906
For Use on Lower Panel in a Hi-Lo Application				
3 ⁷ / ₈ "	23 ³ / ₈ "	13 ³ / ₈ "	36P242FGH3	\$320
	29 ³ / ₈ "		36P302FGH3	342
	35 ³ / ₈ "		36P362FGH3	367
	41 ³ / ₈ "		36P422FGH3	419
	47 ³ / ₈ "		36P482FGH3	438
	53 ³ / ₈ "		36P542FGH3	530
	59 ³ / ₈ "		36P602FGH3	563
	65 ³ / ₈ "		36P662FGH3	617
	71 ³ / ₈ "		36P722FGH3	670
	77 ³ / ₈ "		36P782FGH3	723
	83 ³ / ₈ "		36P842FGH3	800
	89 ³ / ₈ "		36P902FGH3	854
	95 ³ / ₈ "		36P962FGH3	906

IMPORTANT: Frameless glass top cap must be specified separately. Specify pane and top cap to match the width of the panel frame or the combined width of multiple frames to which they will attach.

IMPORTANT: Use 12"H glass pane with top cap with brackets when aligning with an adjacent Xsite frame that is 1H taller; use a 13³/₈"H glass pane with top cap with inset channel in the same application.

Overview	➤ See page 116
Product Information	129
Application Guidelines	130

Standard Includes

- Frameless glass pane: clear, tempered glass

How to Specify


- 1 Model

13³/₈"H Frameless Glass

Pricing

Etched Panes

GSA SIN 711-1



<i>D</i>	<i>W</i>	<i>H</i>	<i>Model</i>	<i>Price</i>
Etched Panes				
3 ⁷ / ₈ "	23 ⁷ / ₈ "	13 ³ / ₈ "	36P242FG72	\$430
	29 ⁷ / ₈ "		36P302FG72	501
	35 ⁷ / ₈ "		36P362FG72	572
	41 ⁷ / ₈ "		36P422FG72	695
	47 ⁷ / ₈ "		36P482FG72	766
	53 ⁷ / ₈ "		36P542FG72	804
	59 ⁷ / ₈ "		36P602FG72	942
	65 ⁷ / ₈ "		36P662FG72	1059
	71 ⁷ / ₈ "		36P722FG72	1130
	77 ⁷ / ₈ "		36P782FG72	1206
	83 ⁷ / ₈ "		36P842FG72	1277
	89 ⁷ / ₈ "		36P902FG72	1356
	95 ⁷ / ₈ "		36P962FG72	1427
For Use on Lower Panel in a Hi-Lo Application				
3 ⁷ / ₈ "	23 ³ / ₈ "	13 ³ / ₈ "	36P242FGH7	\$430
	29 ³ / ₈ "		36P302FGH7	501
	35 ³ / ₈ "		36P362FGH7	572
	41 ³ / ₈ "		36P422FGH7	695
	47 ³ / ₈ "		36P482FGH7	766
	53 ³ / ₈ "		36P542FGH7	804
	59 ³ / ₈ "		36P602FGH7	942
	65 ³ / ₈ "		36P662FGH7	1059
	71 ³ / ₈ "		36P722FGH7	1130
	77 ³ / ₈ "		36P782FGH7	1206
	83 ³ / ₈ "		36P842FGH7	1277
	89 ³ / ₈ "		36P902FGH7	1356
	95 ³ / ₈ "		36P962FGH7	1427

IMPORTANT: Frameless glass top cap must be specified separately. Specify pane and top cap to match the width of the panel frame or the combined width of multiple frames to which they will attach.

IMPORTANT: Use 12"H glass pane with top cap with brackets when aligning with an adjacent Xsite frame that is 1H taller; use a 13³/₈"H glass pane with top cap with inset channel in the same application.

Overview	➤ See page 116
Product Information	129
Application Guidelines	130

Standard Includes

- Frameless glass pane: etched, tempered glass

How to Specify

- 1 Model

Frameless Glass

Pricing

Top Caps

GSA SIN 711-1



<i>D</i>	<i>W</i>	<i>Model</i>	<i>Price</i>
Top Caps with Brackets			
3 1/4"	24"	36P24TCFGBP	\$100
	30"	36P30TCFGBP	104
	36"	36P36TCFGBP	107
	42"	36P42TCFGBP	113
	48"	36P48TCFGBP	117
	60"	36P60TCFGBP	127

<i>D</i>	<i>W</i>	<i>Model</i>	<i>Price</i>
Top Caps with Inset Channel			
3 1/4"	24"	36P24TCFGIP	\$170
	30"	36P30TCFGIP	199
	36"	36P36TCFGIP	227
	42"	36P42TCFGIP	256
	48"	36P48TCFGIP	284
	54"	36P54TCFGIP	313
	60"	36P60TCFGIP	313
	66"	36P66TCFGIP	340
	72"	36P72TCFGIP	369
	78"	36P78TCFGIP	398
	84"	36P84TCFGIP	427
	90"	36P90TCFGIP	455
	96"	36P96TCFGIP	483

IMPORTANT Frameless glass pane must be specified separately. Specify pane and top cap to match the width of the panel frame or the combined width of multiple frames to which they will attach.

IMPORTANT: Hi-lo applications can be accommodated with either style top cap by specifying the appropriate-glass pane for use on the lower panel.


Overview	➤ See page 116
Product Information	129
Application Guidelines	130

Standard Includes

- Flat profile top cap with pre-drilled holes
- Two brackets on applicable models: aluminum, paint
- Attachment bolts and hardware

How to Specify

- ① Model
- ② Top cap profile:
F = Flat
- ③ Finish type:
STD = Group 1
STD M = Group M (+10%)
- ④ Finish designator



<i>W</i>	<i>Model</i>	<i>Price</i>
Frame-Mounted Xsite Traxx		
18"	36P18PMT	\$24
24"	36P24PMT	29
30"	36P30PMT	34
36"	36P36PMT	39
42"	36P42PMT	44
48"	36P48PMT	53
54"	36P54PMT	58
60"	36P60PMT	61
66"	36P66PMT	65
72"	36P72PMT	72
78"	36P78PMT	77
84"	36P84PMT	85
90"	36P90PMT	89
96"	36P96PMT	98
108"	36P108PMT	104
120"	36P120PMT	117
144"	36P144PMT	132

Xsite Traxx is required at top location on both sides of frame.

Additional widths in 3" increments not listed in the pricing table at left are available through electronic specification tools.

Xsite Traxx are required at top and bottom of each tile except when bottom tile rests on bottom channel of frame.

Overview	➤ See page 116
Traxx and Tiles Overview	137
Tile Height Relationships	138
Product Information	140

Standard Includes

- Xsite Traxx lock brackets

How to Specify


- ① Model
- ② Finish type:
STD = Group 1
STD M = Group M (+10%)
- ③ Finish designator

Tackable Acoustical Tiles

Pricing

.5-High

GSA SIN 711-1
COM GSA Non-Contract



W	H	Model	Fabric Price Grade				
			A or COM	B	C	D	E
.5-High Tiles							
18"	5¾"	36P18H06ITASC	\$27	\$43	\$53	\$69	\$93
24"		36P24H06ITASC	29	50	63	85	117
30"		36P30H06ITASC	32	58	75	102	142
36"		36P36H06ITASC	36	65	83	113	157
42"		36P42H06ITASC	41	75	97	132	184
48"		36P48H06ITASC	48	87	113	153	213
54"		36P54H06ITASC	55	97	124	167	231
60"		36P60H06ITASC	60	107	137	186	258
66"		36P66H06ITASC	65	117	151	205	285
72"		36P72H06ITASC	71	126	161	218	302
78"		36P78H06ITASC	75	135	174	236	328
84"		36P84H06ITASC	82	147	190	257	357
90"		36P90H06ITASC	88	156	200	270	374
96"		36P96H06ITASC	96	169	216	292	404

IMPORTANT .5-high tile is only for use with 3.5-high frame.

➤ See page 138 for specific locations.

Fabric is applied railroaded.

➤ See page A13.

Specify tiles for both sides of frame.

.5-high tackable acoustical tiles (excluding to-the-floor models) are available in additional widths in 3" increments from 21" to 93"W, as well as 3" and 6"W tiles, through electronic specification tools.

Overview	➤ See page 116
Traxx and Tiles Overview	137
Product Information	141
Traxx Pricing	198

Standard Includes

- Tackable acoustical tile

How to Specify


- 1 Model
- 2 Fabric grade
- 3 Fabric number

Tackable Acoustical Tiles

Pricing

1-High

GSA SIN 711-1
COM GSA Non-Contract



Fabric is applied railroaded.

➤ See page A13.

1-high tackable acoustical tiles (excluding to-the-floor models) are available in additional widths in 3" increments from 21" to 93"W, as well as 3" and 6"W tiles, through electronic specification tools.

Specify tiles for both sides of frame.

Specify 33"W tile for use above 36"W hinged door and 39"W tile for use above 42"W hinged door.

<i>W</i>	<i>H</i>	<i>Model</i>	Fabric Price Grade				
			<i>A or COM</i>	<i>B</i>	<i>C</i>	<i>D</i>	<i>E</i>
1-High Tiles							
18"	11 ⁷ / ₁₆ "	36P181ITASC	\$31	\$47	\$57	\$73	\$97
24"		36P241ITASC	33	54	67	89	121
30"		36P301ITASC	36	62	79	106	146
33"		36P331ITASC	41	70	88	118	162
36"		36P361ITASC	41	72	93	125	173
39"		36P391ITASC	52	83	104	136	184
42"		36P421ITASC	52	86	108	143	195
48"		36P481ITASC	58	97	123	163	223
54"		36P541ITASC	63	107	136	182	250
60"		36P601ITASC	69	116	146	195	267
66"		36P661ITASC	75	127	161	215	295
72"		36P721ITASC	86	143	181	240	328
78"		36P781ITASC	91	151	190	252	344
84"		36P841ITASC	96	161	204	271	371
90"		36P901ITASC	101	171	217	290	398
96"		36P961ITASC	108	181	228	304	416
To-the-Floor 1-High Tiles							
18"	15 ⁹ / ₃₂ "	36P181ITASCF	\$40	\$56	\$66	\$82	\$106
24"		36P241ITASCF	46	67	80	102	134
30"		36P301ITASCF	58	84	101	128	168
36"		36P361ITASCF	67	98	119	151	199
42"		36P421ITASCF	75	109	131	166	218
48"		36P481ITASCF	87	126	152	192	252
54"		36P541ITASCF	99	143	172	218	286
60"		36P601ITASCF	105	152	182	231	303
66"		36P661ITASCF	120	172	206	260	340
72"		36P721ITASCF	127	184	222	281	369
78"		36P781ITASCF	136	196	235	297	389
84"		36P841ITASCF	149	214	257	324	424
90"		36P901ITASCF	158	228	274	347	455
96"		36P961ITASCF	179	252	299	375	487

Overview	➤ See page 116
Traxx and Tiles Overview	137
Product Information	141
Traxx Pricing	198

Standard Includes

- Tackable acoustical tile

How to Specify


- ① Model
- ② Fabric grade
- ③ Fabric number

Tackable Acoustical Tiles

Pricing

1.5-High

GSA SIN 711-1
COM GSA Non-Contract



W	H	Model	Fabric Price Grade				
			A or COM	B	C	D	E
1.5-High Tiles							
18"	18⅜"	36P18H18ITASC	\$40	\$56	\$66	\$82	\$106
24"		36P24H18ITASC	46	67	80	102	134
30"		36P30H18ITASC	58	84	101	128	168
36"		36P36H18ITASC	67	96	114	144	188
42"		36P42H18ITASC	75	109	131	166	218
48"		36P48H18ITASC	87	126	152	192	252
54"		36P54H18ITASC	99	141	168	211	275
60"		36P60H18ITASC	105	152	182	231	303
66"		36P66H18ITASC	120	172	206	260	340
72"		36P72H18ITASC	127	182	217	274	358
78"		36P78H18ITASC	136	196	235	297	389
84"		36P84H18ITASC	149	214	257	324	424
90"		36P90H18ITASC	158	226	270	340	444
96"		36P96H18ITASC	179	252	299	375	487

IMPORTANT 1.5-high tile is only for use with 3.5-high frame.
➤ See page 138 for specific locations.

Fabric is applied railroaded.
➤ See page A13.

Specify tiles for both sides of frame.

1.5-high tackable acoustical tiles (excluding to-the-floor models) are available in additional widths in 3" increments from 21" to 93"W, as well as 3" and 6"W tiles, through electronic specification tools.

Overview	➤ See page 116
Traxx and Tiles Overview	137
Product Information	141
Traxx Pricing	198

Standard Includes

- Tackable acoustical tile

How to Specify


- 1 Model
- 2 Fabric grade
- 3 Fabric number

Tackable Acoustical Tiles

Pricing

2-High

GSA SIN 711-1
COM GSA Non-Contract



<i>W</i>	<i>H</i>	<i>Model</i>	Fabric Price Grade				
			<i>A or COM</i>	<i>B</i>	<i>C</i>	<i>D</i>	<i>E</i>
2-High Tiles							
18"	24 ¹ / ₁₆ "	36P182ITASC	\$53	\$69	\$79	\$95	\$119
24"		36P242ITASC	59	80	93	115	147
30"		36P302ITASC	70	96	113	140	180
36"		36P362ITASC	86	117	138	170	218
42"		36P422ITASC	96	130	152	187	239
48"		36P482ITASC	108	147	173	213	273
54"		36P542ITASC	123	167	196	242	310
60"		36P602ITASC	132	179	209	258	330
66"		36P662ITASC	149	201	235	289	369
72"		36P722ITASC	158	215	253	312	400
78"		36P782ITASC	171	231	270	332	424
84"		36P842ITASC	185	250	293	360	460
90"		36P902ITASC	197	267	313	386	494
96"		36P962ITASC	211	284	331	407	519
To-the-Floor 2-High Tiles							
18"	27 ⁷ / ₈ "	36P182ITASCF	\$69	\$85	\$95	\$111	\$135
24"		36P242ITASCF	88	109	122	144	176
30"		36P302ITASCF	104	130	147	174	214
36"		36P362ITASCF	125	156	177	209	257
42"		36P422ITASCF	142	176	198	233	285
48"		36P482ITASCF	161	200	226	266	326
54"		36P542ITASCF	183	227	256	302	370
60"		36P602ITASCF	199	246	276	325	397
66"		36P662ITASCF	220	272	306	360	440
72"		36P722ITASCF	238	295	333	392	480
78"		36P782ITASCF	259	319	358	420	512
84"		36P842ITASCF	276	341	384	451	551
90"		36P902ITASCF	295	365	411	484	592
96"		36P962ITASCF	316	389	436	512	624

Fabric is applied railroaded.
➤ See page A13.

Specify tiles for both sides of frame.

2-high tackable acoustical tiles (excluding to-the-floor models) are available in additional widths in 3" increments from 21" to 93"W, as well as 3" and 6"W tiles, through electronic specification tools.

Overview	➤ See page 116
Traxx and Tiles Overview	137
Product Information	141
Traxx Pricing	198

Standard Includes

- Tackable acoustical tile

How to Specify


- ① Model
- ② Fabric grade
- ③ Fabric number

Tackable Acoustical Tiles

Pricing

3-High

GSA SIN 711-1
COM GSA Non-Contract



W	H	Model	Fabric Price Grade				
			A or COM	B	C	D	E
3-High Tiles							
18"	36 ⁵ / ₈ "	36P183ITASC	\$69	\$85	\$95	\$111	\$135
24"		36P243ITASC	88	109	122	144	176
30"		36P303ITASC	104	130	147	174	214
36"		36P363ITASC	125	156	177	209	257
42"		36P423ITASC	142	176	198	233	285
48"		36P483ITASC	161	200	226	266	326
54"		36P543ITASC	183	227	256	302	370
60"		36P603ITASC	199	246	276	325	397
66"		36P663ITASC	220	272	306	360	440
72"		36P723ITASC	238	295	333	392	480
78"		36P783ITASC	259	319	358	420	512
84"		36P843ITASC	276	341	384	451	551
90"		36P903ITASC	295	365	411	484	592
96"		36P963ITASC	316	389	436	512	624
To-the-Floor 3-High Tiles							
18"	40 ⁷ / ₁₆ "	36P183ITASCF	\$77	\$93	\$103	\$119	\$143
24"		36P243ITASCF	97	118	131	153	185
30"		36P303ITASCF	119	145	162	189	229
36"		36P363ITASCF	141	172	193	225	273
42"		36P423ITASCF	164	198	220	255	307
48"		36P483ITASCF	189	228	254	294	354
54"		36P543ITASCF	214	258	287	333	401
60"		36P603ITASCF	232	279	309	358	430
66"		36P663ITASCF	257	309	343	397	477
72"		36P723ITASCF	280	337	375	434	522
78"		36P783ITASCF	302	362	401	463	555
84"		36P843ITASCF	323	388	431	498	598
90"		36P903ITASCF	346	416	462	535	643
96"		36P963ITASCF	368	441	488	564	676

Fabric is applied railroaded.

► See page A13.

Specify tiles for both sides of frame.

3-high tackable acoustical tiles (excluding to-the-floor models) are available in additional widths in 3" increments from 21" to 93"W, as well as 3" and 6"W tiles, through electronic specification tools.

Overview	► See page 116
Traxx and Tiles Overview	137
Product Information	141
Traxx Pricing	198

Standard Includes

- Tackable acoustical tile

How to Specify


- ① Model
- ② Fabric grade
- ③ Fabric number

Tackable Acoustical Tiles

Pricing

3.5-High

GSA SIN 711-1
COM GSA Non-Contract



W	H	Model	Fabric Price Grade				
			A or COM	B	C	D	E
3.5-High Tiles							
18"	43 ⁹ / ₁₆ "	36P18H44ITASC	\$77	\$93	\$103	\$119	\$143
24"		36P24H44ITASC	97	118	131	153	185
30"		36P30H44ITASC	119	145	162	189	229
36"		36P36H44ITASC	141	170	188	218	262
42"		36P42H44ITASC	164	198	220	255	307
48"		36P48H44ITASC	189	228	254	294	354
To-the-Floor 3.5-High Tiles							
18"	47 ³ / ₈ "	36P18H44ITASCF	\$82	\$98	\$108	\$124	\$148
24"		36P24H44ITASCF	102	123	136	158	190
30"		36P30H44ITASCF	128	154	171	198	238
36"		36P36H44ITASCF	154	185	206	238	286
42"		36P42H44ITASCF	181	215	237	272	324
48"		36P48H44ITASCF	204	243	269	309	369

IMPORTANT 3.5-high tile is only for use with 3.5-high frame.
➤ See page 138 for specific locations.

Fabric is applied railroaded.
➤ See page A13.

Specify tiles for both sides of frame.

3.5-high tackable acoustical tiles (excluding to-the-floor models) are available in additional widths in 3" increments from 21" to 45"W, as well as 3" and 6"W tiles, through electronic specification tools.

Overview	➤ See page 116
Traxx and Tiles Overview	137
Product Information	141
Traxx Pricing	198

Standard Includes

- Tackable acoustical tile

How to Specify


- 1 Model
- 2 Fabric grade
- 3 Fabric number

Tackable Acoustical Tiles

Pricing

4-High and 5-High

GSA SIN 711-1
COM GSA Non-Contract



Fabric is applied railroaded.
➤ See page A13.

Specify tiles for both sides of frame.

4- and 5-high tackable acoustical tiles (excluding to-the-floor models) are available in additional widths in 3" increments from 21" to 45"W, as well as 3" and 6"W tiles, through electronic specification tools.

5-high tiles are not available in to-the-floor models due to fabric limitations.

W	H	Model	Fabric Price Grade				
			A or COM	B	C	D	E
4-High Tiles							
18"	49 1/4"	36P184ITASC	\$82	\$98	\$108	\$124	\$148
24"		36P244ITASC	102	123	136	158	190
30"		36P304ITASC	128	154	171	198	238
36"		36P364ITASC	154	185	206	238	286
42"		36P424ITASC	181	259	237	272	324
48"		36P484ITASC	204	243	269	309	369
To-the-Floor 4-High Tiles							
18"	53 1/16"	36P184ITASCF	\$100	\$116	\$126	\$142	\$166
24"		36P244ITASCF	128	149	162	184	216
30"		36P304ITASCF	158	184	201	228	268
36"		36P364ITASCF	191	222	243	275	323
42"		36P424ITASCF	225	259	281	316	368
48"		36P484ITASCF	258	297	323	363	423
5-High Tiles							
18"	61 7/8"	36P185ITASC	\$100	\$116	\$126	\$142	\$166
24"		36P245ITASC	128	149	162	184	216
30"		36P305ITASC	158	184	201	228	268
36"		36P365ITASC	191	222	243	275	323
42"		36P425ITASC	225	259	281	316	368
48"		36P485ITASC	258	297	323	363	423

Overview	➤ See page 116
Traxx and Tiles Overview	137
Product Information	141
Traxx Pricing	198

Standard Includes

- Tackable acoustical tile

How to Specify


- ① Model
- ② Fabric grade
- ③ Fabric number

Wood, Laminate, and Paint Tiles

Pricing

.5-High

GSA SIN 711-1



<i>W</i>	<i>H</i>	<i>Model</i>	<i>Wood</i>	<i>Laminate</i>	<i>Paint</i>
.5-High					
18"	5¾"	36P18H06IT	\$185	\$130	\$121
24"		36P24H06IT	201	157	129
30"		36P30H06IT	215	179	135
33"		36P33H06IT	227	196	141
36"		36P36H06IT	227	196	141
39"		36P39H06IT	236	208	151
42"		36P42H06IT	236	208	151
48"		36P48H06IT	316	266	215
54"		36P54H06IT	330	282	217
60"		36P60H06IT	340	290	228
66"		36P66H06IT	362	304	242
72"		36P72H06IT	373	316	249
78"		36P78H06IT	391	331	257
84"		36P84H06IT	400	340	262
90"		36P90H06IT	410	352	267
96"		36P96H06IT	432	395	382

IMPORTANT .5-high tile is only for use with 3.5-high frame.

➤See page 138 for specific locations.

Specify tiles for both sides of frame.

Wood grain direction runs vertical.

Metallic paint not available.

Additional widths in 3" increments not listed in the pricing table at left are available through electronic specification tools.

Woodgrain laminate is available on laminate tiles in widths up to 57".

Overview	➤See page 116
Traxx and Tiles Overview	137
Product Information	141
Traxx Pricing	198

Standard Includes

- Tile

How to Specify


- 1 Model
- 2 Material:
W = Wood
L = Laminate
P = Paint
- 3 Finish type:
STD = Group 1
STD2 = Group 2 (+20%)
- 4 Finish designator

Wood, Laminate, and Paint Tiles

Pricing

1-High

GSA SIN 711-1



<i>W</i>	<i>H</i>	<i>Model</i>	<i>Wood</i>	<i>Laminate</i>	<i>Paint</i>
1-High					
18"	11 ⁷ / ₁₆ "	36P181IT	\$208	\$146	136
24"		36P241IT	225	176	144
30"		36P301IT	241	202	153
33"		36P331IT	256	221	158
36"		36P361IT	256	221	158
39"		36P391IT	265	234	170
42"		36P421IT	265	234	170
48"		36P481IT	356	299	241
54"		36P541IT	370	316	244
60"		36P601IT	382	326	257
66"		36P661IT	407	345	273
72"		36P721IT	420	356	280
78"		36P781IT	438	371	289
84"		36P841IT	449	382	294
90"		36P901IT	461	396	300
96"		36P961IT	484	444	429

Specify tiles for both sides of frame.

Wood grain direction runs vertical.

Metallic paint not available.

Additional widths in 3" increments not listed in the pricing table at left are available through electronic specification tools.

Woodgrain laminate is available on laminate tiles in widths up to 57".

Overview	➤ See page 116
Traxx and Tiles Overview	137
Product Information	141
Traxx Pricing	198

Standard Includes

- Tile

How to Specify


- 1 Model
- 2 Material:
W = Wood
L = Laminate
P = Paint
- 3 Finish type:
STD = Group 1
STD2 = Group 2 (+20%)
- 4 Finish designator

Wood, Laminate, and Paint Tiles

Pricing

1.5-High

GSA SIN 711-1



<i>W</i>	<i>H</i>	<i>Model</i>	<i>Wood</i>	<i>Laminate</i>	<i>Paint</i>
1.5-High					
18"	18 ³ / ₈ "	36P18H18IT	\$232	\$157	\$144
24"		36P24H18IT	255	186	155
30"		36P30H18IT	273	213	165
33"		36P33H18IT	309	232	172
36"		36P36H18IT	309	232	172
39"		36P39H18IT	380	274	234
42"		36P42H18IT	380	274	234
48"		36P48H18IT	420	312	263
54"		36P54H18IT	464	353	272
60"		36P60H18IT	515	366	284
66"		36P66H18IT	578	395	297
72"		36P72H18IT	618	421	304
78"		36P78H18IT	672	449	319
84"		36P84H18IT	721	531	332
90"		36P90H18IT	774	566	349
96"		36P96H18IT	823	601	477

IMPORTANT 1.5-high tile is only for use with 3.5-high frame.
➤See page 138 for specific locations.

Specify tiles for both sides of frame.

Wood grain direction runs vertical.

Metallic paint not available.

Additional widths in 3" increments not listed in the pricing table at left are available through electronic specification tools.

Woodgrain laminate is available on laminate tiles in widths up to 57".

Overview	➤See page 116
Traxx and Tiles Overview	137
Product Information	141
Traxx Pricing	198

Standard Includes

- Tile

How to Specify


- 1 Model
- 2 Material:
W = Wood
L = Laminate
P = Paint
- 3 Finish type:
STD = Group 1
STD2 = Group 2 (+20%)
- 4 Finish designator

Wood, Laminate, and Paint Tiles

Pricing

2-High

GSA SIN 711-1



<i>W</i>	<i>H</i>	<i>Model</i>	<i>Wood</i>	<i>Laminate</i>	<i>Paint</i>
2-High					
18"	24 ¹ / ₁₆ "	36P182IT	\$257	\$167	\$153
24"		36P242IT	284	195	165
30"		36P302IT	304	224	177
36"		36P362IT	363	246	185
42"		36P422IT	447	313	276
48"		36P482IT	484	324	286
54"		36P542IT	547	390	299
60"		36P602IT	608	406	312
66"		36P662IT	679	446	322
72"		36P722IT	728	485	330
78"		36P782IT	788	528	350
84"		36P842IT	850	623	370
90"		36P902IT	911	667	396
96"		36P962IT	970	707	525

Specify tiles for both sides of frame.

Wood grain direction runs vertical.

Metallic paint not available.

Additional widths in 3" increments not listed in the pricing table at left are available through electronic specification tools.

Woodgrain laminate is available on laminate tiles in widths up to 57".

Overview	➤ See page 116
Traxx and Tiles Overview	137
Product Information	141
Traxx Pricing	198

Standard Includes

- Tile

How to Specify


- 1 Model
- 2 Material:
W = Wood
L = Laminate
P = Paint
- 3 Finish type:
STD = Group 1
STD2 = Group 2 (+20%)
- 4 Finish designator

Wood, Laminate, and Paint Tiles

Pricing

3-High

GSA SIN 711-1



<i>W</i>	<i>H</i>	<i>Model</i>	<i>Wood</i>	<i>Laminate</i>	<i>Paint</i>
3-High					
18"	36 ⁵ / ₈ "	36P183IT	\$347	\$234	\$158
24"		36P243IT	363	284	171
30"		36P303IT	455	337	196
36"		36P363IT	547	407	237
42"		36P423IT	640	477	284
48"		36P483IT	728	538	317
54"		36P543IT	820	597	357
60"		36P603IT	911	660	396
66"		36P663IT	1018	721	434
72"		36P723IT	1091	778	473
78"		36P783IT	1180	840	504
84"		36P843IT	1271	903	553
90"		36P903IT	1366	963	592
96"		36P963IT	1455	1022	636

Specify tiles for both sides of frame.

Wood grain direction is vertical.

Metallic paint not available.

Additional widths in 3" increments not listed in the pricing table at left are available through electronic specification tools.

Woodgrain laminate is available on laminate tiles in widths up to 57".

Overview	➤ See page 116
Traxx and Tiles Overview	137
Product Information	141
Traxx Pricing	198

Standard Includes

- Tile

How to Specify

- 1 Model
- 2 Material:
W = Wood
L = Laminate
P = Paint
- 3 Finish type:
STD = Group 1
STD2 = Group 2 (+20%)
- 4 Finish designator