Landscaping

PB1001 Integral One Bottom Turning Plow

Equipment for Base Machine

Hitch:
Lift-type, Category I,
not iMatch Compatible
One, 14 In. (355.6 mm) Moldboard
Transport Length:
45 In. (1,143 mm)
Transport Width:
33 In. (838.2 mm)
Transport Height:
40.5 In. (1,028.7 mm)
Tractor Engine HP Range:
25 - 50 HP

Moldboard Dimensions: 14 In. (355.6 mm) (W) x 21 In. (533.4 mm) (L) x 16 In. (406.4 mm) (H) Parking Stand Included

ATTACHMENT
CODE IDENTIFIER DESCRIPTION

SUGGESTED LIST PRICE USD (\$)

Select One Code From Each Required Category

BASE MACHINE

3431XF

PB1001 Integral One Bottom Turning Plow *Order in multiples of two*.

758.00

ATTACHMENTS FOR FIELD CONVERSION

Miscellaneous:

5TITE511154

French Kit - Includes Operator's Manual, Parts Catalog and Safety Decals PB1001 and PB1002

Landscaping PB1001 Integral One Bottom Turning Plow Continued Continued THIS PAGE IS INTENTIONALLY LEFT BLANK

Landscaping

PB1002 Integral Two Bottom Turning Plow

Equipment for Base Machine

Hitch:
Lift-type, Category I,
not iMatch Compatible
Two, 14 In. (355.6 mm) Moldboards
Transport Length:
71 In. (1,803.4 mm)
Transport Width:
40 In. (1,016 mm)
Transport Height:
40.5 In. (1,028.7 mm)
Tractor Engine HP Range:

25 - 50 HP Moldboard Dimensions: 14 In. (355.6 mm) (W) x 21 In. (533.4 mm) (L) x 16 In. (406.4 mm) (H)

ATTACHMENT CODE IDENTIFIER DI

DESCRIPTION

SUGGESTED LIST PRICE USD (\$)

Select One Code From Each Required Category

BASE MACHINE

3432XF

PB1002 Integral Two Bottom Turning Plow *Order in multiples of two*.

1,243.00

ATTACHMENTS FOR FIELD CONVERSION

Miscellaneous:

5TITE511154

French Kit - Includes Operator's Manual, Parts Catalog and Safety Decals *PB1001 and PB1002*

PB1002 Integral Two Bottom Turning Plow

Contin	ued
THIS PAGE IS INTENTION	ONALLY LEFT BLANK

Landscaping

BB2048 Standard Duty Box Blade

Equipment for Base Machine

3-Point Hitch:
 Category I
iMatch Compatible: Yes
Working Width: 48 In.
Tractor HP: 17 to 45 HP
Tailgate: Fixed
Shipping Weight:
 758 lbs. - (Pair)
Shanks: (4) Replaceable
Shank Type:
 3-Position with Holes and 1/2 In. Pin
Scarifier Points:
 Replaceable, Hardened Steel
End Plate Thickness: 3/8 In.
Moldboard Thickness: 3/16 In.

Moldboard Type: Formed Back
Mast: Bolt-up with 1/4 In. Plates
Duty: Standard Duty
Cutting Edges:
 (2) 1/2 In. x 6 In. Reversible
Assembly/Set up Time:
 30 Minutes (Approximate) - Per Pair
Approximate Operating Weight: 355 lbs.
Warranty: 1 Year

ATTACHMENT
CODE IDENTIFIER DESCRIPTION

SUGGESTED LIST PRICE USD (\$)

Select One Code From Each Required Category

BASE MACHINE

1041XF BB2048 Standard Duty Box Blade Order in multiples of two.

986.00

ATTACHMENTS FOR FIELD CONVERSION

Miscellaneous:

5WS101371 French Operator's Manual and Decal Kit (BB20, BB21 and BB20L Series)

BB2048 Standard Duty Box Blade
Continued

THIS PAGE IS INTENTIONALLY LEFT BLANK

Landscaping

BB2048L Limited Category I Standard Duty Box Blade

Equipment for Base Machine

Capacity:
6.6 Cubic Foot
Tractor HP (Maximum): 25 HP
Cutting Edges:
(2) 1/2 In. x 6 Reversible
Scarifier Shanks:
3-Position with Holes
Scarifier Shank Points:
3 Replaceable, Hardened Points
Beam Size: 4 In. x 4 In. x 1/4 In.
Beam Reinforcement:
3/8 In. x 1 In. Bar Inside Tube
End Plate Thickness: 3/16 In.
Working Width: 48 In.
Height: 14 In.
Depth: 17 In.

3-Point Hitch:
Limited Category I (Aftermarket Category 0 Lift Pins Available)
Mast Design:
Bolt-up with 1/4 In. Plates
Moldboard Thickness: 7 Gauge
Assembly/Set-up Time:
30 Minutes (Approximate)
Approximate Operating Weight: 275 lbs.
Shipping Weight: 636 lbs.
Packaged 2 per Pallet

ATTACHMENT
CODE IDENTIFIER DESCRIPTION

Tailgate: Fixed

SUGGESTED LIST PRICE USD (\$)

Select One Code From Each Required Category

BASE MACHINE

1051XF BB2048L Limited Category I Standard Duty Box Blade

Order in multiples of two.

822.00

ATTACHMENTS FOR FIELD CONVERSION

Miscellaneous:

5WS101371 French Operator's Manual and Decal Kit (BB20, BB21 and BB20L Series)

BB2048L Limited Category I Standard Duty Box Blade Continued THIS PAGE IS INTENTIONALLY LEFT BLANK

Landscaping

BB2060 Standard Duty Box Blade

Equipment for Base Machine

3-Point Hitch: Category I iMatch Compatible: Yes Working Width: 60 In. Tractor HP: 19 to 55 HP Tailgate: Fixed Shipping Weight:
918 lbs. - (Pair)
Shanks: (4) Replaceable Shank Type: 3-Position with Holes and 1/2 In. Pin Scarifier Points: Replaceable, Hardened Steel End Plate Thickness: 3/8 In. Moldboard Thickness: 3/16 In.

Moldboard Type: Formed Back Mast: Bolt-up with 1/4 In. Plates Duty: Standard Duty (2) 1/2 In. x 6 In. Reversible
Assembly/Set-Up Time:
30 Minutes (Approximate) - Per Pair
Approximate Operating Weight: 425 lbs.
Warranty: 1 Year Cutting Edges:

ATTACHMENT CODE **IDENTIFIER** DESCRIPTION **SUGGESTED LIST PRICE** USD (\$)

Select One Code From Each Required Category

BASE MACHINE

1042XF BB2060 Standard Duty Box Blade

1,071.00 Order in multiples of two.

ATTACHMENTS FOR FIELD CONVERSION

Miscellaneous:

5WS101371 French Operator's Manual and Decal Kit (BB20, BB21 and BB20L Series)

BB2060 Standard Duty Box Blade Continued

THIS PAGE	IS INTENTIONA	IIVIEET BI ANK

Landscaping

BB2065 Standard Duty Box Blade

Equipment for Base Machine

3-Point Hitch:
 Category I

IMatch Compatible: Yes
Working Width: 66 In.
Tractor HP: 23 to 55 HP
Tailgate: Fixed
Shipping Weight:
 988 lbs. - (Pair)
Shanks: (4) Replaceable
Shank Type:
 3-Position with Holes and 1/2 In. Pin
Scarifier Points:
 Replaceable, Hardened Steel
End Plate Thickness: 3/8 In.
Moldboard Thickness: 3/16 In.

Moldboard Type: Formed Back
Mast: Bolt-up with 1/4 In. Plates
Duty: Standard Duty
Cutting Edges:
 (2) 1/2 In. x 6 In. Reversible
Assembly/Set up Time:
 30 Minutes (Approximate) - Per Pair
Approximate Operating Weight: 460 lbs.
Warranty: 1 Year

ATTACHMENT
CODE IDENTIFIER DESCRIPTION

SUGGESTED LIST PRICE USD (\$)

Select One Code From Each Required Category

BASE MACHINE

1043XF BB2065 Standard Duty Box Blade Order in multiples of two. 1,169.00

ATTACHMENTS FOR FIELD CONVERSION

Miscellaneous:

5WS101371 French Operator's Manual and Decal Kit (BB20, BB21 and BB20L Series)

BB2065 Standard Duty Box Blade Continued

THIS PAGE	IS INTENTIONA	IIVIEET BI ANK

Landscaping

BB2072 Standard Duty Box Blade

Equipment for Base Machine

3-Point Hitch:
 Category I
iMatch Compatible: Yes
Working Width: 72 In.
Tractor HP: 27 to 55 HP
Tailgate: Fixed
Shipping Weight:
 1056 lbs. - (Pair)
Shanks: (5) Replaceable
Shank Type:
 3-Position with Holes and 1/2 In. Pin
Scarifier Points:
 Replaceable, Hardened Steel
End Plate Thickness: 3/8 In.
Moldboard Thickness: 3/16 In.

Moldboard Type: Formed Back
Mast: Bolt-up with 1/4 In. Plates
Duty: Standard Duty
Cutting Edges:
 (2) 1/2 In. x 6 In. Reversible
Assembly/Set up Time:
 30 Minutes (Approximate) - Per Pair
Approximate Operating Weight: 494 lbs.
Warranty: 1 Year

ATTACHMENT
CODE IDENTIFIER DESCRIPTION

SUGGESTED LIST PRICE USD (\$)

Select One Code From Each Required Category

BASE MACHINE

1044XF BB2072 Standard Duty Box Blade Order in multiples of two. 1,227.00

ATTACHMENTS FOR FIELD CONVERSION

Miscellaneous:

5WS101371 French Operator's Manual and Decal Kit (BB20, BB21 and BB20L Series)

BB2072 Standard Duty Box Blade
Continued

THIS PAGE IS INTENTIONALLY LEFT BLANK

Landscaping

BB2172 Medium Duty Box Blade

Equipment for Base Machine

3-Point Hitch:
Category I
Working Width: 72 In.
Height: 33-1/2 In.
Depth: 31 In.
Capacity:
19 Cubic Foot
Tractor HP: 70 HP Maximum
Tailgate:
Floating/Removable
Shanks:
(6) Replaceable
Beam Size:
4 In. x 4 In. x 1/4 In.
Beam Reinforcement:
1 In. x 3/8 In. Backing Strip
End Plate Thickness:
3/8 In. with a 3/8 In. x 3 In.
Reinforced Bottom Edge

Moldboard Thickness: 3/16 In.
Duty: Medium
Cutting Edges:
 (2) 1/2 In. x 6 In. Reversible
Assembly/Set-Up Time:
 15 Minutes (Approximate)
Operating Weight:
 585 lbs. (Approximate)
Shipping Weight:
 675 lbs. (Approximate)
Packaged 1 Per Pallet
Mast: Bolt-up with 3/8 In. Plates
Warranty: 1 Year

ATTACHMENT
CODE IDENTIFIER DESCRIPTION

SUGGESTED LIST PRICE USD (\$)

Select One Code From Each Required Category

BASE MACHINE

1061XF BB2172 Medium Duty Box Blade 1,684.00

ATTACHMENTS FOR FIELD CONVERSION

Miscellaneous:

5WS101371 French Operator's Manual and Decal Kit (BB20, BB21 and BB20L Series) 31.60

BB2172 Medium Duty Box Blade Continued		
THIS PAGE IS INTENTIONALLY LEFT BLANK		
THIS PAGE IS INTENTIONALLY LEFT BLANK		

Landscaping

BB2184 Medium Duty Box Blade

Equipment for Base Machine

3-Point Hitch:
 Category I, iMatch Compatible
 (Quick-Attach System)
Working Width: 84 In.
Height: 33-1/2 In.
Depth: 31 In.
Capacity: 22.3 Cubic Foot
Tractor HP (Maximum): 70 HP
Tailgate:
 Floating/Removable
Shanks: (7) Replaceable
Beam Size: 4 In. x 4 In. x 1/4 In.
Beam Reinforcement:
 1 In. x 3/8 In. Backing Strip
End Plate Thickness:
 3/8 In. with a 3/8 In. x 3 In.
Reinforced Bottom Edge

Moldboard Thickness: 3/16 In.
Cutting Edges:
 (2) 1/2 In. x 6 In. Reversible
Assembly/Set-Up Time:
 15 Minutes (Approximate)
Operating Weight:
 667 lbs. (Approximate)
Shipping Weight:
 757 lbs. (Approximate)
Packaged 1 Per Pallet
Mast: Bolt-up with 3/8 In. Plates
Warranty: 1 Year

ATTACHMENT
CODE IDENTIFIER DESCRIPTION

Duty: Medium

SUGGESTED LIST PRICE USD (\$)

Select One Code From Each Required Category

BASE MACHINE

1062XF BB2184 Medium Duty Box Blade 1,846.00

ATTACHMENTS FOR FIELD CONVERSION

Miscellaneous:

5WS101371 French Operator's Manual and Decal Kit (BB20, BB21 and BB20L Series)

Continued		
THIS PAGE IS INTENTIONALLY LEFT BLANK		

Landscaping

BB4160 - 5 Ft. Hydraulic Scarifier Box Blade - Low Back

Equipment for Base Machine

Tailgate: Hinged, Floating Grading and Leveling: Fine, Precision Grading and Leveling Tractor Compatibility: Category I iMatch Compatible Beam Type: Tubular Scarifier Beam Scarifier Shanks: Notched 3 Position Points: Heat Treated Points Box Design: Low Back Hydraulic Opening: Hydraulically Operated Scarifier Bar Hydraulic Kit: Pin Kit And Hydraulic Hose Kit Included Capacity (Cubic Foot): 21.8 Cubic Foot Tractor HP: Up to 50 HP Cutting Edges:
(2) 1/2 In. x 6 In. Reversible Scarifier Shanks: (6) Replaceable Beam Size: Main Beam - 4 In. \times 4 In. \times 1/4 In. Shank Beam - 4 In. x 4 In. x 1/4 In.

Beam Reinforcement:

1/2 In. x 3/4 In. Bar
End Plate Thickness: 3/8 In.
Working Width: 60 In.
Height: 20 In.
Depth: 33 In.
Duty: Medium
Hitch Type:
Category I iMatch Compatible
Mast Design:
Welded 3/8 In. Plate
Assembly/Set-Up Time: 30 Minutes
Operating Weight: 725 lbs.
Shipping Weight: 765 lbs.
Shipping Weight: 765 lbs.
Shipping per Crate:
Packaged 1 Per Pallet
Warranty: 1 Year Warranty
Moldboard Thickness: 3/16 In.
Manufacturer Model: TB30-60H
Paint Color: Green

ATTACHMENT
CODE IDENTIFIER DESCRIPTION

SUGGESTED LIST PRICE USD (\$)

Select One Code From Each Required Category

BASE MACHINE

1101XF

BB4160 - 5 Ft. Hydraulic Scarifier Box Blade - Low Back Green only.

3,015.00

BB4160 - 5 Ft. Hydraulic Scarifier Box Blade - Low Back Continued

THIS PAGE IS INTENTIONALLY LEFT BLANK

09 November 2015 US & Canada	

Landscaping

BB4166 - 5 Ft. 6 In. Hydraulic Scarifier Box Blade - Low Back

Equipment for Base Machine

Tailgate: Hinged, Floating Grading and Leveling: Fine, Precision Grading and Leveling Tractor Compatibility: Category I iMatch Compatible Beam Type: Tubular Scarifier Beam Scarifier Shanks: Notched 3 Position Points: Heat Treated Points Box Design: Low Back Hydraulic Opening: Hydraulically Operated Scarifier Bar Hydraulic Kit: Pin Kit and Hydraulic Hose Kit Included Capacity (Cubic Foot): 24 Cubic Foot Tractor HP: Up to 50 HP Cutting Edges:
(2) 1/2 In. x 6 In. Reversible Scarifier Shanks: (6) Replaceable Beam Size: Main Beam - 4 In. \times 4 In. \times 1/4 In. Shank Beam - 4 In. x 4 In. x 1/4 In.

Beam Reinforcement:

1/2 In. x 3/4 In. Bar
End Plate Thickness: 3/8 In.
Working Width: 66 In.
Height: 20 In.
Depth: 33 In.
Duty: Medium
Hitch Type:
Category I iMatch Compatible
Mast Design:
Welded 3/8 In. Plate
Assembly/Set-Up Time: 30 Minutes
Operating Weight: 772 lbs.
Shipping Weight: 812 lbs.
Shipping Weight: 812 lbs.
Shipping per Crate:
Packaged 1 Per Pallet
Warranty: 1 Year Warranty
Moldboard Thickness: 3/16 In.
Manufacturer Model: TB30-66H
Paint Color: Green

ATTACHMENT
CODE IDENTIFIER DESCRIPTION

SUGGESTED LIST PRICE USD (\$)

Select One Code From Each Required Category

BASE MACHINE

1102XF

BB4166 - 5 Ft. 6 In. Hydraulic Scarifier Box Blade - Low Back Green only.

3,148.00

BB4166 - 5 Ft. 6 In. Hydraulic Scarifier Box Blade - Low Back Continued

THIS PAGE IS INTENTIONALLY LEFT BLANK

Landscaping

BB4172 - 6 Ft. Hydraulic Scarifier Box Blade - Low Back

Equipment for Base Machine

Tailgate: Hinged, Floating Grading and Leveling: Fine, Precision Grading and Leveling Tractor Compatibility: Category I iMatch Compatible Beam Type: Tubular Scarifier Beam Scarifier Shanks: Notched 3 Position Points: Heat Treated Points Box Design: Low Back Hydraulic Opening: Hydraulically Operated Scarifier Bar Hydraulic Kit: Pin Kit and Hydraulic Hose Kit Included Capacity (Cubic Foot): 26.2 Cubic Foot Tractor HP: Up to 50 HP Cutting Edges:
(2) 1/2 In. x 6 In. Reversible Scarifier Shanks: (6) Replaceable Beam Size: Main Beam - 4 In. \times 4 In. \times 1/4 In. Shank Beam - 4 In. x 4 In. x 1/4 In.

Beam Reinforcement:
 1/2 In. x 3/4 In. Bar
End Plate Thickness: 3/8 In.
Working Width: 72 In.
Height: 20 In.
Depth: 33 In.
Duty: Medium
Hitch Type:
 Category I iMatch Compatible
Mast Design:
 Welded 3/8 In. Plate
Assembly/Set-Up Time: 30 Minutes
Operating Weight: 815 lbs.
Shipping Weight: 815 lbs.
Shipping Weight: 855 lbs.
Shipping per Crate:
 Packaged 1 Per Pallet
Warranty: 1 Year Warranty
Moldboard Thickness: 3/16 In.
Manufacturer Model: TB30-72H
Paint Color: Green

ATTACHMENT
CODE IDENTIFIER DESCRIPTION

SUGGESTED LIST PRICE USD (\$)

Select One Code From Each Required Category

BASE MACHINE

1103XF

BB4172 - 6 Ft. Hydraulic Scarifier Box Blade - Low Back

3,250.00

BB4172 - 6 Ft. Hydraulic Scarifier Box Blade - Low Back Continued THIS PAGE IS INTENTIONALLY LEFT BLANK

Landscaping

BB4178 - 6 Ft. 6 In. Hydraulic Scarifier Box Blade - Low Back

Equipment for Base Machine

Tailgate: Hinged, Floating Grading and Leveling: Fine, Precision Grading and Leveling Tractor Compatibility:
Category I and II, iMatch and
Quick Coupler Compatible Beam Type: Tubular Scarifier Beam Scarifier Shanks: Notched 3 Position Points: Heat Treated Points Box Design: Low Back Hydraulic Opening: Hydraulically Operated Scarifier Bar Hydraulic Kit:
Pin Kit and Hydraulic Hose Kit Included Capacity (Cubic Foot):
28.3 Cubic Foot
Tractor HP: Up to 90 HP
Cutting Edges: (2) 1/2 In. x 6 In. Reversible Scarifier Shanks: (8) Replaceable Beam Size: Main Beam - 4 In. \times 4 In. \times 1/4 In. Shank Beam - 4 In. \times 4 In. \times 1/4 In.

Beam Reinforcement:
 1/2 In. x 3/4 In. Bar
End Plate Thickness: 1/2 In.
Working Width: 78 In.
Height: 20 In.
Depth: 33 In.
Duty: Heavy
Hitch Type:
 Category I and II, iMatch and
 Quick Coupler Compatible
Mast Design:
 Welded 1/2 In. Plate
Assembly/Set-Up Time: 30 Minutes
Operating Weight: 1016 lbs.
Shipping Weight: 1056 lbs.
Shipping per Crate:
 Packaged 1 Per Pallet
Warranty: 1 Year Warranty
Moldboard Thickness: 1/4 In.
Manufacturer Model: TB30-78H
Paint Color:
 Construction Yellow (Optional Green)

ATTACHMENT CODE IDENTIFIER DESCRIPTION

1104XF

SUGGESTED LIST PRICE USD (\$)

3,755.00

Select One Code From Each Required Category

BASE MACHINE

	MACHINE COLOR	
1000	Green	In Base Price
1010	Construction Yellow	Same Price

BB4178 - 6 Ft. 6 In. Hydraulic Scarifier Box Blade - Low Back

BB4178 - 6 Ft. 6 In. Hydraulic Scarifier Box Blade - Low Back Continued

THIS PAGE IS INTENTIONALLY LEFT BLANK

Landscaping

BB4184 - 7 Ft. Hydraulic Scarifier Box Blade - Low Back

Equipment for Base Machine

Tailgate: Hinged, Floating Grading and Leveling: Fine, Precision Grading And Leveling Tractor Compatibility:
Category I and II, iMatch and
Quick Coupler Compatible Beam Type: Tubular Scarifier Beam Scarifier Shanks: Notched 3 Position Points: Heat Treated Points Box Design: Low Back Hydraulic Opening: Hydraulically Operated Scarifier Bar Hydraulic Kit:
Pin Kit and Hydraulic Hose Kit Included Capacity (Cubic Foot): 30.5 Cubic Foot Tractor HP: Up to 90 HP Cutting Edges: (2) 1/2 In. x 6 In. Reversible Scarifier Shanks: (8) Replaceable Beam Size: Main Beam - 4 In. \times 4 In. \times 1/4 In. Shank Beam - 4 In. \times 4 In. \times 1/4 In.

Beam Reinforcement:
 1/2 In. x 3/4 In. Bar
End Plate Thickness: 1/2 In.
Working Width: 84 In.
Height: 20 In.
Depth: 33 In.
Duty: Heavy
Hitch Type:
 Category I and II, iMatch and
 Quick Coupler Compatible
Mast Design:
 Welded 1/2 In. Plate
Assembly/Set-Up Time: 30 Minutes
Operating Weight: 1052 lbs.
Shipping Weight: 1092 lbs.
Shipping weight: 1092 lbs.
Shipping per Crate:
 Packaged 1 Per Pallet
Warranty: 1 Year Warranty
Moldboard Thickness: 1/4 In.
Manufacturer Model: TB30-84H
Paint Color:
 Construction Yellow (Optional Green)

ATTACHMENT CODE IDENTIFIER DESCRIPTION

1105XF

SUGGESTED LIST PRICE USD (\$)

3,866.00

Select One Code From Each Required Category

BASE MACHINE

BB4184 - 7 Ft. Hydraulic Scarifier Box Blade - Low Back

	MACHINE COLOR	
1000	Green	In Base Price
1010	Construction Yellow	Same Price

BB4184 - 7 Ft. Hydraulic Scarifier Box Blade - Low Back Continued THIS PAGE IS INTENTIONALLY LEFT BLANK

Landscaping

BB4196 - 8 Ft. Hydraulic Scarifier Box Blade - Low Back

Equipment for Base Machine

Tailgate: Hinged, Floating Grading and Leveling: Fine, Precision Grading and Leveling Tractor Compatibility:
Category I and II, iMatch and
Quick Coupler Compatible Beam Type: Tubular Scarifier Beam Scarifier Shanks: Notched 3 Position Points: Heat Treated Points Box Design: Low Back Hydraulic Opening: Hydraulically Operated Scarifier Bar Hydraulic Kit:
Pin Kit and Hydraulic Hose Kit Included Capacity (Cubic Foot): 34.9 Cubic Foot Tractor HP: Up to 90 HP Cutting Edges: (2) 1/2 In. x 6 In. Reversible Scarifier Shanks: (8) Replaceable Beam Size: Main Beam - 4 In. \times 4 In. \times 1/4 In. Shank Beam - 4 In. \times 4 In. \times 1/4 In.

Beam Reinforcement:
 1/2 In. x 3/4 In. Bar
End Plate Thickness: 1/2 In.
Working Width: 96 In.
Height: 20 In.
Depth: 33 In.
Duty: Heavy
Hitch Type:
 Category I and II, iMatch and
 Quick Coupler Compatible
Mast Design:
 Welded 1/2 In. Plate
Assembly/Set-Up Time: 30 Minutes
Operating Weight: 1146 lbs.
Shipping Weight: 1186 lbs.
Shipping weight: 1186 lbs.
Shipping per Crate:
 Packaged 1 Per Pallet
Warranty: 1 Year Warranty
Moldboard Thickness: 1/4 In.
Manufacturer Model: TB30-96H
Paint Color:
 Construction Yellow (Optional Green)

ATTACHMENT CODE IDENTIFIER DESCRIPTION

1106XF

SUGGESTED LIST PRICE USD (\$)

3,983.00

Select One Code From Each Required Category

BASE MACHINE

BB4196 - 8 Ft. Hydraulic Scarifier Box Blade - Low Back

•		
	MACHINE COLOR	
1000	Green	In Base Price
1010	Construction Yellow	Same Price

BB4196 - 8 Ft. Hydraulic Scarifier Box Blade - Low Back Continued THIS PAGE IS INTENTIONALLY LEFT BLANK

Landscaping

BB4278H - 6 Ft. 6 In. Hydraulic Scarifier Box Blade - High Back

Equipment for Base Machine

Tailgate: Hinged, Floating Grading and Leveling: Fine, Precision Grading and Leveling Tractor Compatibility:
Category I and II, iMatch and
Quick Coupler Compatible Beam Type: Tubular Scarifier Beam Scarifier Shanks: Notched 3 Position Points: Heat Treated Points Box Design: High Back Hydraulic Opening: Hydraulically Operated Scarifier Bar Hydraulic Kit:
Pin Kit and Hydraulic Hose Kit Included Capacity (Cubic Foot):
 32 Cubic Foot Tractor HP: Up to 90 HP Cutting Edges: (2) 1/2 In. x 6 In. Reversible Scarifier Shanks: (8) Replaceable Beam Size: Main Beam - 5 In. x 5 In. x 1/4 In. Shank Beam - 5 In. x 5 In. x 1/4 In. Beam Reinforcement:

1/2 In. x 1 In. Bar
End Plate Thickness: 1/2 In.
Working Width: 78 In.
Height:
20 In. Front, 26 In. Rear
Depth: 33 In.
Duty: Heavy
Hitch Type:
Category I and II, iMatch and
Quick Coupler Compatible
Mast Design:
Welded 1/2 In. Plate
Assembly/Set-Up Time: 30 Minutes
Operating Weight: 1160 lbs.
Shipping Weight: 1200 lbs.
Shipping Weight: 1200 lbs.
Shipping per Crate:
Packaged 1 Per Pallet
Warranty: 1 Year Warranty
Moldboard Thickness: 1/4 In.
Manufacturer Model: TB40-78H
Paint Color:
Construction Yellow (Optional Green)

ATTACHMENT CODE IDENTIFIER DESCRIPTION

SUGGESTED LIST PRICE USD (\$)

Select One Code From Each Required Category

BASE MACHINE

1111XF	BB4278H - 6 Ft. 6 In. Hydraulic Scarifier Box Blade - High Back	4,012.00
	MACHINE COLOR	
1000	Green	In Base Price
1010	Construction Yellow	Same Price

BB4278H - 6 Ft. 6 In. Hydraulic Scarifier Box Blade - High Back Continued

THIS PAGE IS INTENTIONALLY LEFT BLANK

Landscaping

BB4284H - 7 Ft. Hydraulic Scarifier Box Blade - High Back

Equipment for Base Machine

Tailgate: Hinged, Floating Grading and Leveling: Fine, Precision Grading and Leveling Tractor Compatibility: Category I and II, iMatch and Quick Coupler Compatible Beam Type: Tubular Scarifier Beam Scarifier Shanks: Notched 3 Position Points: Heat Treated Points Box Design: High Back Hydraulic Opening: Hydraulically Operated Scarifier Bar Hydraulic Kit:
Pin Kit and Hydraulic Hose Kit Included Capacity (Cubic Foot):
34.5 Cubic Foot
Tractor HP: Up to 90 HP
Cutting Edges: (2) 1/2 In. x 6 In. Reversible Scarifier Shanks: (8) Replaceable Beam Size: Main Beam - 5 In. x 5 In. x 1/4 In. Shank Beam - 5 In. x 5 In. x 1/4 In. Beam Reinforcement:

1/2 In. x 1 In. Bar
End Plate Thickness: 1/2 In.
Working Width: 84 In.
Height:
20 In. Front, 26 In. Rear
Depth: 33 In.
Duty: Heavy
Hitch Type:
Category I and II, iMatch and
Quick Coupler Compatible
Mast Design:
Welded 1/2 In. Plate
Assembly/Set-Up Time: 30 Minutes
Operating Weight: 1200 lbs.
Shipping Weight: 1240 lbs.
Shipping Weight: 1240 lbs.
Shipping per Crate:
Packaged 1 Per Pallet
Warranty: 1 Year Warranty
Moldboard Thickness: 1/4 In.
Manufacturer Model: TB40-84H
Paint Color:
Construction Yellow (Optional Green)

ATTACHMENT CODE IDENTIFIER DESCRIPTION

SUGGESTED LIST PRICE USD (\$)

Select One Code From Each Required Category

BASE MACHINE

1112XF	BB4284H - 7 Ft. Hydraulic Scarifier Box Blade - High Back	4,077.00
	MACHINE COLOR	
1000	Green	In Base Price
1010	Construction Yellow	Same Price

BB4284H - 7 Ft. Hydraulic Scarifier Box Blade - High Back Continued THIS PAGE IS INTENTIONALLY LEFT BLANK

Landscaping

BB4296H - 8 Ft. Hydraulic Scarifier Box Blade - High Back

Equipment for Base Machine

Tailgate: Hinged, Floating Grading and Leveling: Fine, Precision Grading and Leveling Tractor Compatibility: Category I and II, iMatch and Quick Coupler Compatible Beam Type: Tubular Scarifier Beam Scarifier Shanks: Notched 3 Position Points: Heat Treated Points Box Design: High Back Hydraulic Opening: Hydraulically Operated Scarifier Bar Hydraulic Kit:
Pin Kit and Hydraulic Hose Kit Included Capacity (Cubic Foot):
39.4 Cubic Foot
Tractor HP: Up to 90 HP
Cutting Edges: (2) 1/2 In. x 6 In. Reversible Scarifier Shanks: (8) Replaceable Beam Size: Main Beam - 5 In. x 5 In. x 1/4 In. Shank Beam - 5 In. x 5 In. x 1/4 In. Beam Reinforcement:

1/2 In. x 1 In. Bar
End Plate Thickness: 1/2 In.
Working Width: 96 In.
Height:
20 In. Front, 26 In. Rear
Depth: 33 In.
Duty: Heavy
Hitch Type:
Category I and II, iMatch and
Quick Coupler Compatible
Mast Design:
Welded 1/2 In. Plate
Assembly/Set-Up Time: 30 Minutes
Operating Weight: 1310 lbs.
Shipping Weight: 1350 lbs.
Shipping weight: 1350 lbs.
Shipping per Crate:
Packaged 1 Per Pallet
Warranty: 1 Year Warranty
Moldboard Thickness: 1/4 In.
Manufacturer Model: TB4096H
Paint Color:
Construction Yellow (Optional Green)

ATTACHMENT
CODE IDENTIFIER DESCRIPTION

SUGGESTED LIST PRICE USD (\$)

Select One Code From Each Required Category

BASE MACHINE

1113XF	BB4296H - 8 Ft. Hydraulic Scarifier Box Blade - High Back	4,265.00
	MACHINE COLOR	
1000	Green	In Base Price
1010	Construction Yellow	Same Price

BB4296H - 8 Ft. Hydraulic Scarifier Box Blade - High Back Continued THIS PAGE IS INTENTIONALLY LEFT BLANK

Landscaping

BB3272 - 6 Ft. Construction Grade Box Blade with Scarifiers

Equipment for Base Machine

Tailgate: Hinged Tailgate Grading and Leveling: Fine, Precision Grading and Leveling Tractor Compatibility: Balanced Design Beam Type: Tubular Scarifier Beam Scarifier Shanks: Notched 3 Position Points: Heat Treated Points Box Design: High Capacity Box, No Gussets or Obstructions Hydraulic Opening: NA Hydraulic Kit: NA
Capacity (Cubic Foot):
21 Cubic Foot
Tractor HP: 80 HP Maximum Cutting Edges:
(2) 1/2 In. x 6 In. Reversible Scarifier Shanks: (7) Replaceable Beam Size: 4 In. \times 4 In. \times 3/8 In.

Beam Reinforcement: Yes
End Plate Thickness: 1/2 In.
Working Width: 72 In.
Height: 20 In.
Depth: 26-1/2 In.
Duty: Construction Grade
Hitch Type:
Category I and Category II
Quick Hitch Compatible
Mast Design: Welded
Assembly/Set-Up Time: 15 Minutes
Operating Weight: 790 lbs.
Shipping Weight: 830 lbs.
Shipping Weight: 830 lbs.
Shipping per Crate:
Packaged 1 Per Pallet
Warranty: 1 Year Warranty
Moldboard Thickness: 1/4 In.
Manufacturer Model: New
Paint Color: Construction Yellow

ATTACHMENT
CODE IDENTIFIER DESCRIPTION

SUGGESTED LIST PRICE USD (\$)

Select One Code From Each Required Category

BASE MACHINE

1081XF

BB3272 - 6 Ft. Construction Grade Box Blade with Scarifiers Construction yellow. 2,330.00

BB3272 - 6 Ft. Construction Grade Box Blade with Scarifiers Continued THIS PAGE IS INTENTIONALLY LEFT BLANK

Landscaping

BB3284 - 7 Ft. Construction Grade Box Blade with Scarifiers

Equipment for Base Machine

Tailgate: Hinged Tailgate Grading and Leveling: Fine, Precision Grading and Leveling Tractor Compatibility: Balanced Design Beam Type: Tubular Scarifier Beam Scarifier Shanks: Notched 3 Position Points: Heat Treated Points Box Design: High Capacity Box, No Gussets or Obstructions Hydraulic Opening: NA Hydraulic Kit: NA
Capacity (Cubic Foot):
24.50 Cubic Foot
Tractor HP: 80 HP Maximum Cutting Edges:
(2) 1/2 In. x 6 In. Reversible Scarifier Shanks: (8) Replaceable Beam Size: 4 In. \times 4 In. \times 3/8 In.

Beam Reinforcement: Yes
End Plate Thickness: 1/2 In.
Working Width: 84 In.
Height: 20 In.
Depth: 26-1/2 In.
Duty: Construction Grade
Hitch Type:
Category I and Category II
Quick Hitch Compatible
Mast Design: Welded
Assembly/Set-Up Time: 15 Minutes
Operating Weight: 885 lbs.
Shipping Weight: 925 lbs.
Shipping Weight: 925 lbs.
Shipping per Crate:
Packaged 1 Per Pallet
Warranty: 1 Year Warranty
Moldboard Thickness: 1/4 In.
Manufacturer Model: New
Paint Color: Construction Yellow

ATTACHMENT
CODE IDENTIFIER DESCRIPTION

SUGGESTED LIST PRICE USD (\$)

Select One Code From Each Required Category

BASE MACHINE

1082XF

BB3284 - 7 Ft. Construction Grade Box Blade with Scarifiers Construction yellow. 2,562.00

BB3284 - 7 Ft. Construction Grade Box Blade with Scarifiers Continued THIS PAGE IS INTENTIONALLY LEFT BLANK

Landscaping

BB3296 - 8 Ft. Construction Grade Box Blade with Scarifiers

Equipment for Base Machine

Tailgate: Hinged Tailgate Grading and Leveling: Fine, Precision Grading and Leveling Tractor Compatibility: Balanced Design Beam Type: Tubular Scarifier Beam Scarifier Shanks: Notched 3 Position Points: Heat Treated Points Box Design: High Capacity Box, No Gussets or Obstructions Hydraulic Opening: NA Hydraulic Kit: NA
Capacity (Cubic Foot):
28 Cubic Foot
Tractor HP: 80 HP Maximum Cutting Edges:
(2) 1/2 In. x 6 In. Reversible Scarifier Shanks: (9) Replaceable Beam Size: 4 In. \times 4 In. \times 3/8 In.

Beam Reinforcement: Yes
End Plate Thickness: 1/2 In.
Working Width: 96 In.
Height: 20 In.
Depth: 26-1/2 In.
Duty: Construction Grade
Hitch Type:
Category I and Category II
Quick Hitch Compatible
Mast Design: Welded
Assembly/Set-Up Time: 15 Minutes
Operating Weight: 1010 lbs.
Shipping Weight: 1050 lbs.
Shipping weight: 1050 lbs.
Shipping per Crate:
Packaged 1 Per Pallet
Warranty: 1 Year Warranty
Moldboard Thickness: 1/4 In.
Manufacturer Model: New
Paint Color: Construction Yellow

ATTACHMENT
CODE IDENTIFIER DESCRIPTION

SUGGESTED LIST PRICE USD (\$)

Select One Code From Each Required Category

BASE MACHINE

1083XF

BB3296 - 8 Ft. Construction Grade Box Blade with Scarifiers Construction yellow. 2,841.00

Landscaping BB3296 - 8 Ft. Construction Grade Box Blade with Scarifiers Continued THIS PAGE IS INTENTIONALLY LEFT BLANK

Landscaping

BB5060 Standard Duty Box Blade

Equipment for Base Machine

3-Point Hitch:
 Category I
iMatch Compatible: Yes
Working Width: 61.5 In.
Tractor HP: 56 PTO HP max;
 see compatibility charts for
 specific model of tractors
Tailgate: Fixed
Shipping Weight:
 894 lbs. - (Pair)
Shanks: (5) Replaceable
Shank Type:
 3-Position with Holes and 1/2 In. Pin
Scarifier Points:
 Hardened Steel
End Plate Thickness: 3/8 In.

Moldboard Thickness: 3/16 In.
Moldboard Type: Formed Back
Mast: Welded
Duty: Standard Duty
Cutting Edges:
(2) 3/8 In. x 6 In. Reversible
Assembly/Set-Up Time:
15 Minutes (Approximate) - Per Pair
Approximate Operating Weight: 418 lbs.
Warranty: 1 Year

ATTACHMENT
CODE IDENTIFIER DESCRIPTION

SUGGESTED LIST PRICE USD (\$)

Select One Code From Each Required Category

BASE MACHINE

1641XF

BB5060 Standard Duty Box Blade *Order in multiples of two*.

925.00

BB5060 Standard Duty Box Blade Continued

THIS PAGE	IS INTENTIO	$1 \land 1 \land 1 \land 1$	FFT BI ANK

Landscaping

BB5072 Standard Duty Box Blade

Equipment for Base Machine

3-Point Hitch:
 Category I
iMatch Compatible: Yes
Working Width: 73.5 In.
Tractor HP: 56 PTO HP max;
 see compatibility charts for
 specific model of tractors
Tailgate: Fixed
Shipping Weight:
 1,006 lbs. - (Pair)
Shanks: (6) Replaceable
Shank Type:
 3-Position with Holes and 1/2 In. Pin
Scarifier Points:
 Hardened Steel
End Plate Thickness: 3/8 In.

Moldboard Thickness: 3/16 In.
Moldboard Type: Formed Back
Mast: Welded
Duty: Standard Duty
Cutting Edges:
(2) 3/8 In. x 6 In. Reversible
Assembly/Set-Up Time:
15 Minutes (Approximate) - Per Pair
Approximate Operating Weight: 474 lbs.
Warranty: 1 Year

ATTACHMENT
CODE IDENTIFIER DESCRIPTION

SUGGESTED LIST PRICE USD (\$)

Select One Code From Each Required Category

BASE MACHINE

1642XF

BB5072 Standard Duty Box Blade *Order in multiples of two*.

1,070.00

BB5072 Standard Duty Box Blade Continued THIS PAGE IS INTENTIONALLY LEFT BLANK

Landscaping

BB5084 Standard Duty Box Blade

Equipment for Base Machine

3-Point Hitch:
 Category I
iMatch Compatible: Yes
Working Width: 88.5 In.
Tractor HP: 56 PTO HP max;
 see compatibility charts for
 specific model of tractors
Tailgate: Fixed
Shipping Weight:
 1,078 lbs. - (Pair)
Shanks: (6) Replaceable
Shank Type:
 3-Position with Holes and 1/2 In. Pin
Scarifier Points:
 Hardened Steel
End Plate Thickness: 3/8 In.

Moldboard Thickness: 3/16 In.
Moldboard Type: Formed Back
Mast: Welded
Duty: Standard Duty
Cutting Edges:
(2) 3/8 In. x 6 In. Reversible
Assembly/Set-Up Time:
15 Minutes (Approximate) - Per Pair
Approximate Operating Weight: 510 lbs.
Warranty: 1 Year

ATTACHMENT
CODE IDENTIFIER DESCRIPTION

SUGGESTED LIST PRICE USD (\$)

Select One Code From Each Required Category

BASE MACHINE

1643XF

BB5084 Standard Duty Box Blade *Order in multiples of two*.

1,223.00

BB5084 Standard Duty Box Blade
Continued

THIS PAGE IS INTENTIONALLY LEFT BLANK

Landscaping

BB5096 Standard Duty Box Blade

Equipment for Base Machine

3-Point Hitch:
 Category I
iMatch Compatible: Yes
Working Width: 97.5 In.
Tractor HP: 56 PTO HP max;
 see compatibility charts for
 specific model of tractors
Tailgate: Fixed
Shipping Weight:
 1,262 lbs. - (Pair)
Shanks: (7) Replaceable
Shank Type:
 3-Position with Holes and 1/2 In. Pin
Scarifier Points:
 Hardened Steel
End Plate Thickness: 3/8 In.

Moldboard Thickness: 3/16 In.
Moldboard Type: Formed Back
Mast: Welded
Duty: Standard Duty
Cutting Edges:
(2) 3/8 In. x 6 In. Reversible
Assembly/Set-Up Time:
15 Minutes (Approximate) - Per Pair
Approximate Operating Weight: 602 lbs.
Warranty: 1 Year

ATTACHMENT
CODE IDENTIFIER DESCRIPTION

SUGGESTED LIST PRICE USD (\$)


Select One Code From Each Required Category

BASE MACHINE

1644XF

BB5096 Standard Duty Box Blade *Order in multiples of two*.

1,369.00

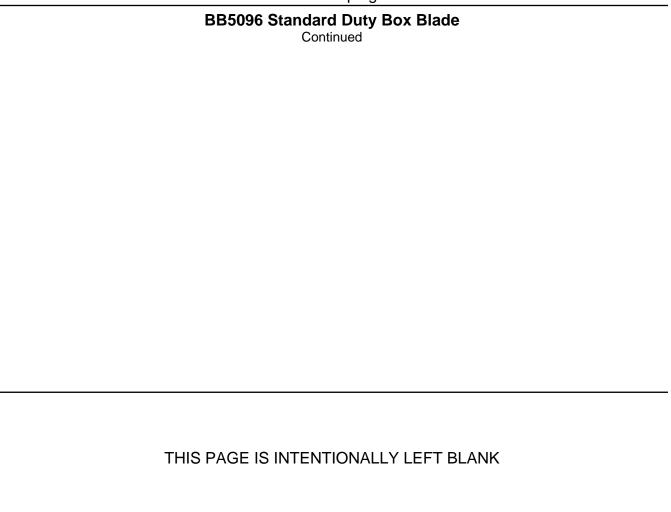

Landscaping

BB5048L Limited Category 1 Economy Duty Box Blade

Equipment for Base Machine

3-Point Hitch:
Limited Category I
iMatch Compatible: Yes
Working Width: 50 In.
Tractor HP: 18 PTO HP max;
see compatibility charts for
specific model of tractors
Tailgate: Fixed
Shipping Weight:
778 lbs. - (Pair)
Shanks: (5) Replaceable
Shank Type:
3-Position with Holes and 1/2 In. Pin
Scarifier Points:
Hardened Steel
End Plate Thickness: 5/16 In.

Moldboard Thickness: 3/16 In.
Moldboard Type: Formed Back
Mast: Bolt On
Duty: Economy Duty
Cutting Edges:
(2) 3/8 In. x 6 In. Reversible
Assembly/Set-Up Time:
15 Minutes (Approximate) - Per Pair
Approximate Operating Weight: 360 lbs.
Warranty: 1 Year

ATTACHMENT
CODE IDENTIFIER DESCRIPTION

SUGGESTED LIST PRICE USD (\$)

Select One Code From Each Required Category

BASE MACHINE

1741XF

BB5048L Limited Category 1 Economy Duty Box Blade Order in multiples of two.

753.00

BB5048L Limited Category 1 Economy Duty Box Blade Continued THIS PAGE IS INTENTIONALLY LEFT BLANK

Landscaping

BB5060L Limited Category 1 Economy Duty Box Blade

Equipment for Base Machine

3-Point Hitch:
Limited Category I
iMatch Compatible: Yes
Working Width: 62 In.
Tractor HP: 18 PTO HP max;
see compatibility charts for
specific model of tractors
Tailgate: Fixed
Shipping Weight:
868 lbs. - (Pair)
Shanks: (5) Replaceable
Shank Type:
3-Position with Holes and 1/2 In. Pin
Scarifier Points:
Hardened Steel
End Plate Thickness: 5/16 In.

Moldboard Thickness: 3/16 In.
Moldboard Type: Formed Back
Mast: Bolt On
Duty: Economy Duty
Cutting Edges:
(2) 3/8 In. x 6 In. Reversible
Assembly/Set-Up Time:
15 Minutes (Approximate) - Per Pair
Approximate Operating Weight: 405 lbs.
Warranty: 1 Year

ATTACHMENT
CODE IDENTIFIER DESCRIPTION

SUGGESTED LIST PRICE USD (\$)

Select One Code From Each Required Category

BASE MACHINE

1742XF

BB5060L Limited Category 1 Economy Duty Box Blade Order in multiples of two.

821.00

BB5060L Limited Category 1 Economy Duty Box Blade Continued THIS PAGE IS INTENTIONALLY LEFT BLANK

Landscaping

LL1160 - 5 Ft. Drawn Box Scraper

Equipment for Base Machine

Working Width: 60 In.
Machine Width: 61 In.
Machine Length: 98 In.
Machine Height: 29.5 In.
Approximate Operating Weight: 612 lbs.
Tractor HP (Maximum): 20 to 50 HP
Tailgate: Fixed
Shanks: 6 (Replaceable)
End Plate Thickness: 3/8 In.
Single Hydraulic Cylinder:
3 In. Bore x 8 In. Stroke
Tires (2): Pneumatic
Wheels (2):
6 In. Wide x 10 In. Diameter

Cutting Edge:
5/8 In. Thick x 6 In. Tall
Safety Chains: Yes - Required
Color: Construction Yellow
Assembly/Set-Up Time:
15 Minutes (Approximate)
Duty: Standard Duty
Warranty: 1 Year

ATTACHMENT
CODE IDENTIFIER DESCRIPTION

SUGGESTED LIST PRICE USD (\$)

Select One Code From Each Required Category

BASE MACHINE

1471XF LL1160 - 5 Ft. Drawn Box Scraper 4,482.00

LL1160 - 5 Ft. Drawn Box Scraper

Continued

THIS PAGE IS INTENTIONAL	LLY LEFT BLANK
--------------------------	----------------

Landscaping

LL1172 - 6 Ft. Drawn Box Scraper

Equipment for Base Machine

Working Width: 72 In.
Machine Width: 73 In.
Machine Length: 98 In.
Machine Height: 29.5 In. Machine Height: 29.5 In.
Approximate Operating Weight: 735 lbs.
Tractor HP (Maximum): 20 to 50 HP
Tailgate: Fixed
Shanks: 6 (Replaceable)
End Plate Thickness: 3/8 In.
Single Hydraulic Cylinder:
3 In. Bore x 8 In. Stroke
Tires (2): Pneumatic
Wheels (2):
6 In. Wide x 10 In. Diameter

Cutting Edge:
5/8 In. Thick x 6 In. Tall
Safety Chains: Yes - Required
Color: Construction Yellow Assembly/Set-Up Time:
15 Minutes (Approximate)
Duty: Standard Duty Warranty: 1 Year

ATTACHMENT CODE **IDENTIFIER** DESCRIPTION

6 In. Wide x 10 In. Diameter

SUGGESTED LIST PRICE USD (\$)

Select One Code From Each Required Category

BASE MACHINE

1472XF LL1172 - 6 Ft. Drawn Box Scraper 4,409.00

LL1172 - 6 Ft. Drawn Box Scraper

Continued

THIS PAGE IS INTENTIONALLY LEF	T BLANK
--------------------------------	---------

Landscaping

LL1208 - 8 Ft. Drawn Box Scraper

Equipment for Base Machine

Working Width: 96 In.
Machine Width: 96.3 In.
Machine Length: 144 In.
Machine Height: 36 In.
Approximate Operating Weight: 1500 lbs.
Tractor HP (Maximum): 35 to 100 HP
Tailgate: Fixed
Lift Axle: Standard Lift Rockshaft
End Plate Thickness: 3/8 In.
Hydraulic Lift Cylinder:
3 In. Bore x 8 In. Stroke
Tires (2): Pneumatic -9.5L15 Implement Tires
Wheels (2):
8 In. Wide x 15 In. Diameter

Cutting Edge:
5/8 In. Thick x 6 In. Tall
Safety Chains: Yes - Required
Color: Construction Yellow
Assembly/Set-Up Time:
60 Minutes (Approximate)
Duty: Standard Duty
Warranty: 1 Year

	ATTACHMENT	
CODE	IDENTIFIER	DESCRIPTION

5DDA00094

SUGGESTED LIST PRICE USD (\$)

1,096.03

Select One Code From Each Required Category

		1 3 7	
		BASE MACHINE	
1541XF		LL1208 - 8 Ft. Drawn Box Scraper Note: Hydraulic tilt axle, 9.5L-15 wheels and tires, lift cylinder, hydraulic hoses, and SCV connectors are in base equipment.	7,223.00
		AXLE OPTION	
1060		Tilt Axle with Cylinder	Same Price
1065		Less Tilt Axle with Cylinder (LL1208 and LL1210)	-914.00
		ATTACHMENTS FOR FIELD CONVERSION	
	5DDA00100	Miscellaneous: 9.5L-15 Tires on 6-Bolt Rims (2)	947.79
	5DDA00096	LL12 Series - Lift Cylinder Kit	685.11
	5DDA00098	LL12 Series - Tilt Cylinder Kit	716.53
	5DDA00097	LL12 Series - Turnbuckle	230.90

Tilt Axle with Cylinder (LL1208 and LL1210)

LL1208 - 8 Ft. Drawn Box Scraper

Continued

THIS PAGE IS INTENTIONAL	LLY LEFT BLANK
--------------------------	----------------

Landscaping

LL1210 - 10 Ft. Drawn Box Scraper

Equipment for Base Machine

Working Width: 120 In.
Machine Width: 120.3 In.
Machine Length: 144 In.
Machine Height: 36 In.
Approximate Operating Weight: 1600 lbs.
Tractor HP (Maximum): 35 to 125 HP
Tailgate: Fixed
Lift Axle: Standard Lift Rockshaft
End Plate Thickness: 3/8 In.
Hydraulic Lift Cylinder:
3 In. Bore x 8 In. Stroke
Tires (2): Pneumatic -9.5L15 Implement Tires
Wheels (2):
8 In. Wide x 15 In. Diameter

Cutting Edge:
5/8 In. Thick x 6 In. Tall
Safety Chains: Yes - Required
Color: Construction Yellow
Assembly/Set-Up Time:
60 Minutes (Approximate)
Duty: Standard Duty
Warranty: 1 Year

			SUGGESTED
	ATTACHMENT		LIST PRICE
CODE	IDENTIFIER	DESCRIPTION	USD (\$)

Select One Code From Each Required Category

BASE MACHINE 1542XF LL1210 - 10 Ft. Drawn Box Scraper Note: Hydraulic tilt axle, 9.5L-15 wheels and tires, lift cylinder, hydraulic hoses, and SCV connectors are in base equipment.

	AXLE OPTION	
1060	Tilt Axle with Cylinder	Same Price
1065	Less Tilt Axle with Cylinder (LL1208 and LL1210)	-914.00

ATTACHMENTS FOR FIELD CONVERSION

5DDA00100	Miscellaneous: 9.5L-15 Tires on 6-Bolt Rims (2)	947.79
5DDA00096	LL12 Series - Lift Cylinder Kit	685.11
5DDA00098	LL12 Series - Tilt Cylinder Kit	716.53
5DDA00097	LL12 Series - Turnbuckle	230.90
5DDA00094	Tilt Axle with Cylinder (LL1208 and LL1210)	1,096.03

Continued
THIS PAGE IS INTENTIONALLY LEFT BLANK

Landscaping

LL1212 - 12 Ft. Drawn Box Scraper

Equipment for Base Machine

Working Width: 144 In.
Machine Width: 143 In.
Machine Length: 144 In.
Machine Height: 36 In.
Approximate Operating Weight: 1700 lbs.
Tractor HP (Maximum): 35 to 125 HP
Tailgate: Fixed
Lift Axle: Standard Lift Rockshaft
End Plate Thickness: 3/8 In.
Hydraulic Lift Cylinder: Hydraulic Lift Cylinder:
3 In. Bore x 8 In. Stroke
Tires (2): Pneumatic -9.5L15 Implement Tires
Wheels (2):

8 In. Wide x 15 In. Diameter

5DDA00095

Tilt Axle with Cylinder (LL1212)

Cutting Edge:
5/8 In. Thick x 6 In. Tall
Safety Chains: Yes - Required
Color: Construction Yellow Assembly/Set-Up Time:
60 Minutes (Approximate)
Duty: Standard Duty Warranty: 1 Year

1,128.25

			SUGGESTED
	ATTACHMENT		LIST PRICE
CODE	IDENTIFIER	DESCRIPTION	USD (\$)

Select One Code From Each Required Category

	BASE MACHINE	
1543XF	LL1212 - 12 Ft. Drawn Box Scraper Note: Hydraulic tilt axle, 9.5L-15 wheels and tires, lift cylinder, hydraulic hoses, and SCV connectors are in base equipment.	7,839.00
	AXLE OPTION	
1060	Tilt Axle with Cylinder	Same Price
1065	Less Tilt Axle with Cylinder (LL1212)	-941.00
	ATTACHMENTS FOR FIELD CONVERSION	
5DDA00100	Miscellaneous: 9.5L-15 Tires on 6-Bolt Rims (2)	947.79
5DDA00096	LL12 Series - Lift Cylinder Kit	685.11
5DDA00098	LL12 Series - Tilt Cylinder Kit	716.53
5DDA00097	LL12 Series - Turnbuckle	230.90

Continued				
THIS PAGE IS INTENTIONALLY LEFT BLANK				

Landscaping

LL1372 - 6 Ft. Drawn Box Scraper

Equipment for Base Machine

Working Width: 72 In.
Machine Width: 74 In.
Machine Length: 165 In.
Machine Height: 49 In.
Approximate Operating Weight: 1600 lbs.
Tractor HP (Maximum): 35 to 100
Tailgate: Fixed
End Plate Thickness: 1/2 In.
Dual Hydraulic Cylinders: 3 In. Bore x
8 In. Stroke (1 Rear SCV Required)
Tires (4): Pneumatic
Wheels (4):
6 In. Wide x 10 In. Diameter

% Thick x 6 In. Tall

6 In. Wide x 10 In. Diameter
Cutting Edge:
5/8 In. Thick x 6 In. Tall

Safety Chains: Yes - Required Color: Construction Yellow Assembly/Set-Up Time:
30 Minutes (Approximate)
Shipping Configuration:

2 Pieces (Box Blade and Tongue) Duty: Medium Duty

Warranty: 6 Months

			SUGGESTED
	ATTACHMENT		LIST PRICE
CODE	IDENTIFIER	DESCRIPTION	USD (\$)

Select One Code From Each Required Category

BASE MACHINE

	BASE MACHINE	
1481XF	LL1372 - 6 Ft. Drawn Box Scraper	8,621.00
	SCARIFIER BAR	
1000	6 Ft. Scarifier Bar Attachment	2,468.00
1095	Less Scarifier Bar Attachment	In Base Price
	REAR SMOOTH ROLLER	
2000	6 Ft. Rear Smooth 12 In. Drum Roller Attachment	2,962.00
2095	Less Rear Smooth Roller	In Base Price
	ATTACHMENTS - ORDER AS DESIRED	
9000	Rear Hitch Assembly	246.00
9030	6 Ft. Double Rear 12 In. Diameter Basket Roller Pulverizer	2,963.00
9040	6 Ft. 3 Bar Spring Tine Harrow	2,346.00
	ATTACHMENTS FOR FIELD CONVERSION	
5DDA00020	Miscellaneous: 3 Bar Spring Tine Harrow - 6 Ft.	2,533.85
5DDA0001	7 Double Rear 12 In. Diameter Basket Roller Pulverizer - 6 Ft.	3,199.93
5DDA0000	7 Rear Hitch Assembly (LL13 Series)	265.68
5DDA00023	Rear Smooth 12 In. Drum Roller Attachment - 6 Ft.	3,412.32
5DDA00029	Scarifier Bar Attachment - 6 Ft.	2,843.60

LL1372 - 6 Ft. Drawn Box Scraper

Continued

Landscaping

LL1384 - 7 Ft. Drawn Box Scraper

Equipment for Base Machine

Working Width: 84 In.
Machine Width: 86 In.
Machine Length: 165 In.
Machine Height: 49 In.
Approximate Operating Weight: 1866 lbs.
Tractor HP (Maximum): 35 to 125 HP
Tailgate: Fixed
End Plate Thickness: 1/2 In.
Dual Hydraulic Cylinders: 3 In. Bore x
8 In. Stroke (1 Rear SCV Required)
Tires (4): Pneumatic
Wheels (4):
6 In. Wide x 10 In. Diameter

% Thick x 6 In. Tall

6 In. Wide x 10 In. Diameter
Cutting Edge:
5/8 In. Thick x 6 In. Tall

Safety Chains: Yes - Required Color: Construction Yellow Assembly/Set-Up Time:
30 Minutes (Approximate)
Shipping Configuration:

2 Pieces (Box Blade and Tongue) Duty: Medium Duty

Warranty: 6 Months

			SUGGESTED
	ATTACHMENT		LIST PRICE
CODE	IDENTIFIER	DESCRIPTION	USD (\$)

Select One Code From Each Required Category

DACE MACHINE

	BASE MACHINE	
1482XF	LL1384 - 7 Ft. Drawn Box Scraper	8,755.00
	SCARIFIER BAR	
1000	6 Ft. Scarifier Bar Attachment	2,468.00
1095	Less Scarifier Bar Attachment	In Base Price
	REAR SMOOTH ROLLER	
2000	7 Ft. Rear Smooth 12 In. Drum Roller Attachment	3,129.00
2095	Less Rear Smooth Roller	In Base Price
	ATTACHMENTS - ORDER AS DESIRED	
9000	Rear Hitch Assembly	246.00
9030	7 Ft. Double Rear 12 In. Diameter Basket Roller Pulverizer	3,126.00
9040	7 Ft. 3 Bar Spring Tine Harrow	2,549.00
	ATTACHMENTS FOR FIELD CONVERSION	
5DDA0002	Miscellaneous: 3 Bar Spring Tine Harrow - 7 Ft.	2,753.34
5DDA0001	8 Double Rear 12 In. Diameter Basket Roller Pulverizer - 7 Ft.	3,376.58
5DDA0000	Rear Hitch Assembly (LL13 Series)	265.68
5DDA0002	Rear Smooth 12 In. Drum Roller Attachment - 7 Ft.	3,604.27
5DDA0002	29 Scarifier Bar Attachment - 6 Ft.	2,843.60

LL1384 - 7 Ft. Drawn Box Scraper

Continued

Landscaping

LL1396 - 8 Ft. Drawn Box Scraper

Equipment for Base Machine

Working Width: 96 In.
Machine Width: 98 In.
Machine Length: 165 In.
Machine Height: 49 In.
Approximate Operating Weight: 2133 lbs.
Tractor HP (Maximum): 35 to 125 HP
Tailgate: Fixed
End Plate Thickness: 1/2 In.
Dual Hydraulic Cylinders: 3 In. Bore x
8 In. Stroke (1 Rear SCV Required)
Tires (4): Pneumatic
Wheels (4):
6 In. Wide x 10 In. Diameter

% Thick x 6 In. Tall

6 In. Wide x 10 In. Diameter
Cutting Edge:
5/8 In. Thick x 6 In. Tall

5DDA00028

Safety Chains: Yes - Required Color: Construction Yellow Assembly/Set-Up Time:
30 Minutes (Approximate)
Shipping Configuration:

2 Pieces (Box Blade and Tongue) Duty: Medium Duty

Warranty: 6 Months

			SUGGESTED
	ATTACHMENT		LIST PRICE
CODE	IDENTIFIER	DESCRIPTION	USD (\$)

Select One Code From Each Required Category

BASE MACHINE

Scarifier Bar Attachment - 8 Ft.

		BASE WACHINE	
1483XF		LL1396 - 8 Ft. Drawn Box Scraper	9,130.00
		SCARIFIER BAR	
1000		8 Ft. Scarifier Bar Attachment	2,387.00
1095		Less Scarifier Bar Attachment	In Base Price
		REAR SMOOTH ROLLER	
2000		8 Ft. Rear Smooth 12 In. Drum Roller Attachment	3,374.00
2095		Less Rear Smooth Roller	In Base Price
		ATTACHMENTS - ORDER AS DESIRED	
9000		Rear Hitch Assembly	246.00
9030		8 Ft. Double Rear 12 In. Diameter Basket Roller Pulverizer	3,293.00
9040		8 Ft. 3 Bar Spring Tine Harrow	2,741.00
		ATTACHMENTS FOR FIELD CONVERSION	
	5DDA00022	Miscellaneous: 3 Bar Spring Tine Harrow - 8 Ft.	2,959.95
	5DDA00019	Double Rear 12 In. Diameter Basket Roller Pulverizer - 8 Ft.	3,556.28
			,
	5DDA00007	Rear Hitch Assembly (LL13 Series)	265.68
	5DDA00025	Rear Smooth 12 In. Drum Roller Attachment - 8 Ft.	3,887.28

2,749.54

LL1396 - 8 Ft. Drawn Box Scraper

Continued

Landscaping

CA2048E - 4 Ft. Economy Core Aerator

Equipment for Base Machine

Reduces Hard Layer Compaction and Increases Turf Vitality
3/8 In. Formed Category I "A" Frame
2 Bronze Bushings per Rotor for
Wear Resistance on Shaft
3-Point Hitch: Category I
Working Width: 48 In.
Tractor HP: 20 to 50 HP
Spoons:
(48) 3/4 In. Case Hardened Steel
Spoon Penetration: 4-1/2 In.
Spoons Per Hub: 6

Approximate Shipping Weight: 400 lbs.

Overall Width: 54 In. iMatch Compatible (Quick-Attach System) Assembly/Set-Up Time: 10 Minutes (Approximate) Approximate Operating Weight: 284 lbs. 1 Year Warranty

CODE	ATTACHMENT IDENTIFIER	DESCRIPTION	SUGGESTED LIST PRICE USD (\$)

Select One Code From Each Required Category

BASE MACHINE

1141XF CA2048E - 4 Ft. Economy Core Aerator 2,303.00

Order optional weight tanks as attachments.

ATTACHMENTS ORDER AS DESIRED

9000 Steel Weight Tank CA2048E, Quantity 2 (2 Required per Machine) 577.00 For sand only.

ATTACHMENTS FOR FIELD CONVERSION

Miscellaneous:

5BP950958B French Manual Decal (CA20 Series) 0.00

5BP0099731 Steel Weight Tank CA2048E, Quantity 1 (2 Required Per Machine) 311.46

For sand only.

CA2048E - 4 Ft. Economy Core Aerator Continued

THIS PAGE IS INTENTIONALLY LEFT BLANK

09 November 2015 US & Canada	

Landscaping

CA2060 - 5 Ft. Standard Duty Core Aerator

Equipment for Base Machine

Reduces Hard Layer Compaction and Increases Turf Vitality
3/8 In. Formed Category I "A" Frame
- Can Hold (2) 170 lb. Sand
Containers - OPTIONAL
2 Bronze Bushings per Rotor for
Wear Resistance on Shaft
3-Point Hitch: Category I and Category II
Working Width: 60 In.
Weight Tray: (2) 19 In. x 21 In.
Tractor HP: 25 to 70 HP
Spoons:
(80) 3/4 In. Case Hardened Steel
Spoon Penetration: 4-1/2 In.

Spoons Per Hub: 8
iMatch Compatible (Quick-Attach System)
Shipping Weight: 500 lbs.
Overall Width: 65 In.
Assembly/Set-Up Time:
 10 Minutes (Approximate)
1 Year Warranty

	ATTACHMENT	
CODE	IDENTIFIER	DESCRIPTION

SUGGESTED LIST PRICE USD (\$)

Select One Code From Each Required Category

BASE MACHINE

1131XF CA2060 - 5 Ft. Standard Duty Core Aerator 3,092.00

Order optional weight tanks as attachments.

ATTACHMENTS ORDER AS DESIRED

9000 Steel Weight Tank CA2060, Quantity 2 (2 Required per Machine) 682.00 For sand only.

ATTACHMENTS FOR FIELD CONVERSION

Miscellaneous:

5BP950958B French Manual Decal (CA20 Series) 0.00

5BP0099734 Steel Weight Tank CA2060, Quantity 1 (2 Required Per Machine) 368.46

For sand only.

CA2060 - 5 Ft. Standard Duty Core Aerator Continued

	THIS PAGE IS INTENTIONALLY LEFT BLANK
·	

Landscaping

CA2060E - 5 Ft. Economy Core Aerator

Equipment for Base Machine

Reduces Hard Layer Compaction and Increases Turf Vitality
3/8 In. Formed Category I "A" Frame
- Can Hold (2) 125 lb. Sand
Containers - OPTIONAL
2 Bronze Bushings per Rotor for
Wear Resistance on Shaft
3-Point Hitch: Category I
Working Width: 60 In.
Weight Tray: (2) 19 In. x 15 In.
Tractor HP: 20 to 50 HP
Spoons:
(60) 3/4 In. Case Hardened Steel
Spoon Penetration: 4-1/2 In.

Spoons Per Hub: 6
iMatch Compatible (Quick-Attach System)
Approximate Shipping Weight: 400 lbs.
Overall Width: 65 In.
Assembly/Set-Up Time:
 10 Minutes (Approximate)
Approximate Operating Weight: 357 lbs.
1 Year Warranty

	ATTACHMENT	
CODE	IDENTIFIER	DESCRIPTION

SUGGESTED LIST PRICE USD (\$)

Select One Code From Each Required Category

BASE MACHINE

1142XF CA2060E - 5 Ft. Economy Core Aerator 2,459.00

Order optional weight tanks as attachments.

ATTACHMENTS ORDER AS DESIRED

9000 Steel Weight Tank CA2060E, Quantity 2 (2 Required per Machine) 608.00 For sand only.

ATTACHMENTS FOR FIELD CONVERSION

Miscellaneous:

5BP950958B French Manual Decal (CA20 Series) 0.00

5BP0099732 Steel Weight Tank CA2060E, Quantity 1 (2 Required Per Machine) 328.53

For sand only.

CA2060E - 5 Ft. Economy Core Aerator Continued

THIS PAGE IS INTENTIONALLY LEFT BLANK

09 November 2015 US & Canada	

Landscaping

CA2072 - 6 Ft. Standard Duty Core Aerator

Equipment for Base Machine

Reduces Hard Layer Compaction and Increases Turf Vitality
3/8 In. Formed Category I "A" Frame
- Can Hold (2) 220 lb.
Sand Containers - OPTIONAL
2 Bronze Bushings per Rotor for Wear Resistance on Shaft
3-Point Hitch:
Category I and Category II
Working Width: 72 In.
Weight Tray: (2) 25 In. x 21 In.
Tractor HP: 25 to 70 HP
Spoons:
(96) 3/4 In. Case Hardened Steel
Spoon Penetration: 4-1/2 In.

5BP0099735

For sand only.

Spoons Per Hub: 8 Shipping Weight: 600 lbs. Overall Width: 78 In. iMatch Compatible (Quick-Attach System) Assembly/Set-Up Time: 10 Minutes (Approximate) Approximate Operating Weight: 549 lbs. 1 Year Warranty

396.82

CODE	ATTACHMENT IDENTIFIER	DESCRIPTION	SUGGESTED LIST PRICE USD (\$)
		Select One Code From Each Required Category	
		BASE MACHINE	
1132XF		CA2072 - 6 Ft. Standard Duty Core Aerator Order optional weight tanks as attachments.	3,458.00
		ATTACHMENTS ORDER AS DESIRED	
9000		Steel Weight Tank CA2072, Quantity 2 (2 Required per Machine) For sand only.	735.00
		ATTACHMENTS FOR FIELD CONVERSION	
	5BP950958B	Miscellaneous: French Manual Decal (CA20 Series)	0.00

Steel Weight Tank CA2072, Quantity 1 (2 Required Per Machine)

CA2072 - 6 Ft. Standard Duty Core Aerator Continued

THIS PAGE IS INTENTIONALLY LEFT BLANK

09 November 2015 U	JS & Canada

Landscaping

CA2072E - 6 Ft. Economy Core Aerator

Equipment for Base Machine

Reduces Hard Layer Compaction and Increases Turf Vitality
3/8 In. Formed Category I "A" Frame
- Can Hold (2) 160 lb. Sand
Containers - OPTIONAL
2 Bronze Bushings per Rotor for
Wear Resistance on Shaft
3-Point Hitch: Category I
Working Width: 72 In.
Weight Tray: (2) 25 In. x 15 In.
Tractor HP: 20 to 50 HP
Spoons:
(72) 3/4 In. Case Hardened Steel
Spoon Penetration: 4-1/2 In.

Spoons Per Hub: 6 iMatch Compatible (Quick-Attach System) Approximate Shipping Weight: 450 lbs. Overall Width: 78 In. Assembly/Set-Up Time: 10 Minutes (Approximate) Approximate Operating Weight: 401 lbs. 1 Year Warranty

	ATTACHMENT	
CODE	IDENTIFIER	DESCRIPTION

SUGGESTED LIST PRICE USD (\$)

Select One Code From Each Required Category

BASE MACHINE

1143XF CA2072E - 6 Ft. Economy Core Aerator 2,689.00

Order optional weight tanks as attachments.

ATTACHMENTS ORDER AS DESIRED

9000 Steel Weight Tank CA2072E, Quantity 2 (2 Required per Machine) 646.00 For sand only.

ATTACHMENTS FOR FIELD CONVERSION

Miscellaneous:

5BP950958B French Manual Decal (CA20 Series) 0.00

5BP0099733 Steel Weight Tank CA2072E, Quantity 1 (2 Required Per Machine) 349.02

For sand only.

CA2072E - 6 Ft. Economy Core Aerator Continued

THIS PAGE IS INTENTIONALLY LEFT BLANK

Landscaping

PC1001 Integral One Row Cultivator

Equipment for Base Machine

Hitch:
Lift-type, Category I,
iMatch Compatible
Working Row Width:
30 to 60 In. (762 to 1524 mm)
Transport Length:
37 In. (939.8 mm)
Transport Width:
50.5 In. (1,282.7 mm)
Transport Height:
36 In. (914.4 mm)

Tractor Engine HP Range:

25 - 45 HP Standard Tines: 6 Curved and Reversible Tines, 1.75 In. (44.45 mm) x 10 In. (254 mm) Tine Spacing: Adjustable Parking Stand Included

ATTACHMENT
CODE IDENTIFIER DESCRIPTION

SUGGESTED LIST PRICE USD (\$)

Select One Code From Each Required Category

BASE MACHINE

3441XF

PC1001 Integral One Row Cultivator *Order in multiples of two.*

429.00

ATTACHMENTS FOR FIELD CONVERSION

Miscellaneous:

5TITE511154

French Kit - Includes Operator's Manual, Parts Catalog and Safety Decals PC1001 and PC1072 14.10

PC1001 Integral One Row Cultivator Continued

THIS PAGE IS INTENTIONAL	LLY LEFT BLANK
--------------------------	----------------

Landscaping

PC1072 - 6 Ft. Integral Field Cultivator (13 S-tines)

Equipment for Base Machine

Hitch:
Lift-type, Category I,
iMatch Compatible
Working Width:
72 In. (1,828.8 mm)
Transport Length:
37.5 In. (952.5 mm)
Transport Width:
73.25 In. (1,860.6 mm)
Transport Height:
39 In. (990.6 mm)
Tractor Engine HP Range:

25 - 45 HP Standard Tines: 13 Curved and Reversible Tines, 1.25 In. (31.75 mm) x 8 In. (203.2 mm) Tine Spacing: Adjustable

ATTACHMENT
CODE IDENTIFIER DESCRIPTION

SUGGESTED LIST PRICE USD (\$)

Select One Code From Each Required Category

BASE MACHINE

3442XF P

PC1072 - 6 Ft. Integral Field Cultivator (13 S-tines) *Order in multiples of two.*

845.00

ATTACHMENTS FOR FIELD CONVERSION

Miscellaneous:

5TITE511154

French Kit - Includes Operator's Manual, Parts Catalog and Safety Decals PC1001 and PC1072 14.10

PC1072 - 6 Ft. Integral Field Cultivator (13 S-tines) Continued

THIS PAGE IS INTENTIONALLY LEFT BLANK

Landscaping

BL1130 - 3 Pt. Mount Debris Blower - U.S.

Equipment for Base Machine

Function: Debris Blower

Function: Debris Blower
Length: 47 1/8 In. (1,197 mm)
Width: 50 In. (1,270 mm)
Height: 48 3/4 In. (1,238.3 mm)
Operating Weight: 689 lb. (312.5 kg)
Fan Diameter: 29 1/2 In. (749.3 mm)
Fan Width: 10 in. (254 mm)
Number of Fan Blades: 12
Fan Speed: 1455 RPM
Air Flow: 6,061 cfm (171 cu. meter per minute)
Air Velocity: 141 mph (227 kph)

Air Velocity: 141 mph (227 kph) Air Velocity: 12,400 fpm (3,779.5 mpm)

Outlet Size: 10 5/8 x 6 5/8 In. (269.9 x 168.3 mm) Air Direction: left or right by moving lever Cat. 1 & 2, iMatch and Quick Hitch Compatible Pneumatic gauge wheel standard Approximate Set-Up Time: 30 Minutes

ATTACHMENT CODE **IDENTIFIER** DESCRIPTION SUGGESTED LIST PRICE USD (\$)

Select One Code From Each Required Category

BASE MACHINE

1571XF BL1130 - 3 Pt. Mount Debris Blower - U.S. 5,260.00

BL1130 - 3 Pt. Mount Debris Blower - U.S.

Continued

IO INITENI	$T \cap V \cap V \cap V$	I FET BLANK
$1 \sim 11011 \rightarrow 101$	1 16 11X1 A 1 1 V	

Landscaping

BL2130 - Hydraulic Loader Mount Debris Blower with HP2025 Hydraulic Power Unit -U.S.

Equipment for Base Machine

Function: Debris Blower Length: 47 1/8 In. (1,197 mm) Width: 50 In. (1,270 mm)

Height: 48 3/4 In. (1,238.3 mm)

Operating Weight: 689 lb. (312.5 kg)

Fan Diameter: 29 1/2 In. (749.3 mm) Fan Width: 10 in. (254 mm) Number of Fan Blades: 12 Fan Speed: 1455 RPM Air Flow: 6,061 cfm (171 cu. meter per minute) Air Velocity: 141 mph (227 kph) Air Velocity: 12,400 fpm (3,779.5 mpm) Outlet Size: 10 5/8 x 6 5/8 In. (269.9 x 168.3 mm)

Air Direction: left or right by moving lever

Pneumatic gauge wheel standard Approximate Set-Up Time: 30 Minutes

Function: Hydraulic Power Unit Pressure: 2700 psi

Flow: 16 gpm

Reservoir Capacity: 15 gal. System Capacity: 17 gal.

System Features: Pressure relieve valve, filter,

temperature

and oil level gauge, and thermal protection switch Hoses, Tips, and Brackets included

92.00

Tractor RPM: 540 RPM PTO Manufacturer: Comer Parking Stand: Standard Hitch Category: Category I

Quick Hitch Compatibility:

iMatch Compatible

Approximate Set-Up Time: 120 Minutes

			SUGGESTED
	ATTACHMENT		LIST PRICE
CODE	IDENTIFIER	DESCRIPTION	USD (\$)

Select One Code From Each Required Category

BASE MACHINE

1581XF	BL2130 - Hydraulic Loader Mount Debris Blower with HP2025 Hydraulic Power Unit - U.S.	11,559.00
	Must be used with HP2025 or HP2134 Hydraulic Power Pack Units.	

HYDRAULIC POWER UNITS

1000	HP2025 - Hydraulic Power Unit, 25 HP Requires wiring harness, 5RDF0039, when changing front implement attachments.	In Base Price
1010	HP2134 - Hydraulic Power Unit, 34 HP Requires wiring harness, 5RDF0039, when changing front implement attachments.	105.06
1095	Less HP2025 Hydraulic Power Unit	-6,499.00

OIL COOLER

2000	Oil Cooler for HP2025 and HP2134 Hydraulic Power Units Includes high efficiency oil cooler, electric fan, bolted support, hoses, fittings and installation instructions. Recommended for application generating high heat. Not available with option Code 1095.	In Base Price
2005	Less Oil Cooler	-1 660 00

ATTACHMENTS - ORDER AS DESIRED

9040 Additional Wiring Harness for HP2025 and HP2134 Hydraulic Power Units for Open

Operator Station Tractors Includes complete wiring harness from battery to switch in the console.

Not available with option Code 1095.

ATTACHMENTS FOR FIELD CONVERSION

Landscaping

BL2130 - Hydraulic Loader Mount Debris Blower with HP2025 Hydraulic Power Unit - U.S.

Continued

CODE	ATTACHMENT IDENTIFIER	DESCRIPTION	SUGGESTED LIST PRICE USD (\$)
		ATTACHMENTS FOR FIELD CONVERSIONContinued	
	5RDF0038	Miscellaneous: Additional Wiring Harness for HP2025 and HP2134 Hydraulic Power Units for Open Operator Station Tractors Includes complete wiring harness from battery to switch in the console.	88.26
	5RDF0036	Oil Cooler for HP2025 and HP2134 Hydraulic Power Units Includes high efficiency oil cooler, electric fan, bolted support, hoses, fittings and installation instructions. Recommended for application generating high heat.	1,650.86
	5RDF0078	Wiring Harness for HP2025 and HP2134 Hydraulic Power Units to control Loader Mounted Attachment Includes complete wiring harness from switch in the console to 3 cavities connectors for front implements.	126.19

Landscaping

BL1130 - 3 Pt. Mount Debris Blower - Canada

Equipment for Base Machine

Function: Debris Blower

Function: Debris Blower
Length: 47 1/8 In. (1,197 mm)
Width: 50 In. (1,270 mm)
Height: 48 3/4 In. (1,238.3 mm)
Operating Weight: 689 lb. (312.5 kg)
Fan Diameter: 29 1/2 In. (749.3 mm)
Fan Width: 10 in. (254 mm)
Number of Fan Blades: 12
Fan Speed: 1455 RPM
Air Flow: 6,061 cfm (171 cu. meter per minute)
Air Velocity: 141 mph (227 kph)

CODE

Air Velocity: 141 mph (227 kph) Air Velocity: 12,400 fpm (3,779.5 mpm)

Outlet Size: 10 5/8 x 6 5/8 In. (269.9 x 168.3 mm) Air Direction: left or right by moving lever Cat. 1 & 2, iMatch and Quick Hitch Compatible Pneumatic gauge wheel standard Approximate Set-Up Time: 30 Minutes

ATTACHMENT IDENTIFIER DESCRIPTION SUGGESTED LIST PRICE USD (\$)

Select One Code From Each Required Category

BASE MACHINE

157AXF BL1130 - 3 Pt. Mount Debris Blower - Canada 5,407.70

BL1130 - 3 Pt. Mount Debris Blower - Canada

C	Continued		
THIS PAGE IS INTE	ENTIONALLY LEFT	BLANK	

Landscaping

BL2130 - Hydraulic Loader Mount Debris Blower with HP2025 Hydraulic Power Unit -Canada

Equipment for Base Machine

Function: Debris Blower Length: 47 1/8 In. (1,197 mm) Width: 50 In. (1,270 mm)

Height: 48 3/4 In. (1,238.3 mm)

Operating Weight: 689 lb. (312.5 kg)

Fan Diameter: 29 1/2 In. (749.3 mm) Fan Width: 10 in. (254 mm) Number of Fan Blades: 12

Fan Speed: 1455 RPM Air Flow: 6,061 cfm (171 cu. meter per minute)

Air Velocity: 141 mph (227 kph) Air Velocity: 12,400 fpm (3,779.5 mpm) Outlet Size: 10 5/8 x 6 5/8 In. (269.9 x 168.3 mm)

Air Direction: left or right by moving lever

Pneumatic gauge wheel standard Approximate Set-Up Time: 30 Minutes Function: Hydraulic Power Unit

Pressure: 2700 psi Flow: 16 gpm

Reservoir Capacity: 15 gal. System Capacity: 17 gal.

System Features: Pressure relieve valve, filter,

temperature

and oil level gauge, and thermal protection switch

Hoses, Tips, and Brackets included

Tractor RPM: 540 RPM PTO Manufacturer: Comer Parking Stand: Standard Hitch Category: Category I Quick Hitch Compatibility:

iMatch Compatible

Approximate Set-Up Time: 120 Minutes

			SUGGESTED
	ATTACHMENT		LIST PRICE
CODE	IDENTIFIER	DESCRIPTION	USD (\$)

Select One Code From Each Required Category

BASE MACHINE

158AXF	BL2130 - Hydraulic Loader Mount Debris Blower with HP2025 Hydraulic Power Unit -	11,962.31
	Canada	
	Must order HP2025 or HP2134 Hydraulic Power Pack Unit to complete the package.	

HYDRAULIC POWER UNITS

1000	HP2025 - Hydraulic Power Unit, 25 HP Requires wiring harness, 5RDF0039, when changing front implement attachments.	In Base Price
1010	HP2134 - Hydraulic Power Unit, 34 HP Requires wiring harness, 5RDF0039, when changing front implement attachments.	121.11
1095	Less HP2025 Hydraulic Power Unit	-6,810.11

OIL COOLER

2000	Oil Cooler for HP2025 and HP2134 Hydraulic Power Units	In Base Price
	Includes high efficiency oil cooler, electric fan, bolted support, hoses, fittings and installation	
	instructions. Recommended for application generating high heat.	
	Not available with option Code 1095.	

2095 Less Oil Cooler -1,735.78

ATTACHMENTS - ORDER AS DESIRED

Additional Wiring Harness for HP2025 and HP2134 Hydraulic Power Units for Open 101.66 9040

Operator Station Tractors

Includes complete wiring harness from battery to switch in the console.

Not available with option Code 1095.

Landscaping

BL2130 - Hydraulic Loader Mount Debris Blower with HP2025 Hydraulic Power Unit - Canada

Continued

CODE	ATTACHMENT IDENTIFIER	DESCRIPTION	SUGGESTED LIST PRICE USD (\$)
		ATTACHMENTS FOR FIELD CONVERSION	
	5RDF0038	Miscellaneous: Additional Wiring Harness for HP2025 and HP2134 Hydraulic Power Units for Open Operator Station Tractors Includes complete wiring harness from battery to switch in the console.	88.26
	5RDF0036	Oil Cooler for HP2025 and HP2134 Hydraulic Power Units Includes high efficiency oil cooler, electric fan, bolted support, hoses, fittings and installation instructions. Recommended for application generating high heat.	1,650.86
	5RDF0078	Wiring Harness for HP2025 and HP2134 Hydraulic Power Units to control Loader Mounted Attachment Includes complete wiring harness from switch in the console to 3 cavities connectors for front implements.	126.19

Landscaping

LP1048 Standard Drawn Land Plane

Equipment for Base Machine

Working Width: 48 In.
Shipping Weight: 445 lbs.
End Plate Thickness: 3/16 In.
Duty: Light Duty
Cutting Edges: (2)
Assembly/Set-Up Time: 15 Minutes
Approximate Operating Weight: 365 lbs.

Warranty: 1 Year

ATTACHMENT CODE DESCRIPTION **IDENTIFIER**

SUGGESTED LIST PRICE USD (\$)

Select One Code From Each Required Category

BASE MACHINE

1441XF LP1048 Standard Drawn Land Plane 1,358.00

LP1048 Standard Drawn Land Plane

Continued

THIS PAGE IS INTENTIONALLY LEFT BLANK	
	THIS PAGE IS INTENTIONALLY LEFT BLANK

Landscaping

LP1060 Standard Drawn Land Plane

Equipment for Base Machine

Working Width: 60 In.
Shipping Weight: 495 lbs.
End Plate Thickness: 3/16 In.
Duty: Light Duty
Cutting Edges: (2)
Assembly/Set-Up Time: 15 Minutes
Approximate Operating Weight: 415 lbs.

Warranty: 1 Year

ATTACHMENT CODE DESCRIPTION **IDENTIFIER**

SUGGESTED LIST PRICE USD (\$)

Select One Code From Each Required Category

BASE MACHINE

1442XF LP1060 Standard Drawn Land Plane 1,376.00

LP1060 Standard Drawn Land Plane

Continued

THIS PAGE	IS INTENTIONA	IIVIEET BI ANK

Landscaping

LP1160 - 5 Ft. 3-Point Land Plane

Equipment for Base Machine

3-Point Hitch: Category I iMatch Compatible (Quick-Attach System) Working Width: 60 In.
Tractor HP Recommendation: 18 to 50 HP

CODE

Skid Shoes: Weld on, 3/16 In. Shipping Weight: 573 lbs. End Plate Thickness: 3/16 In. Duty: Standard Duty Cutting Edges: (2) Reversible

Assembly/Set-Up Time: 10 Minutes Approximate Operating Weight: 520 lbs. Warranty: 1 Year

SUGGESTED LIST PRICE USD (\$)

ATTACHMENT IDENTIFIER

DESCRIPTION

Select One Code From Each Required Category

BASE MACHINE

1451XF LP1160 - 5 Ft. 3-Point Land Plane 1,393.00

ATTACHMENTS FOR FIELD CONVERSION

Miscellaneous:

5TL15746 French Kit - Includes Operator's Manual and Safety Decals (LP11 Series) 44.50

THIS PAGE IS INTENTIONALLY LEFT BLANK

Landscaping

LP1172 - 6 Ft. 3-Point Land Plane

Equipment for Base Machine

3-Point Hitch: Category I iMatch Compatible (Quick-Attach System) Working Width: 72 In. Tractor HP Recommendation: 18 to 50 HP

CODE

Skid Shoes: Weld on, 3/16 In. Shipping Weight: 628 lbs. End Plate Thickness: 3/16 In. Duty: Standard Duty Cutting Edges: (2) Reversible

Assembly/Set-Up Time: 10 Minutes Approximate Operating Weight: 548 lbs. Warranty: 1 Year

SUGGESTED LIST PRICE USD (\$)

ATTACHMENT IDENTIFIER

DESCRIPTION

Select One Code From Each Required Category

BASE MACHINE

1452XF LP1172 - 6 Ft. 3-Point Land Plane

ATTACHMENTS FOR FIELD CONVERSION

Miscellaneous:

5TL15746 French Kit - Includes Operator's Manual and Safety Decals (LP11 Series) 44.50

1,470.00

LP1172 - 6 Ft. 3-Point Land Plane Continued	
	_
THIS PAGE IS INTENTIONALLY LEFT BLANK	
	_

Landscaping

LP1184 - 7 Ft. 3-Point Land Plane

Equipment for Base Machine

3-Point Hitch: Category I and II iMatch Compatible (Quick-Attach System) Working Width: 84 In.
Tractor HP Recommendation: 22 to 75 HP

Skid Shoes: Weld on, 3/16 In. Shipping Weight: 684 lbs. End Plate Thickness: 3/16 In. Duty: Standard Duty Cutting Edges: (2) Reversible

Assembly/Set-Up Time: 10 Minutes Approximate Operating Weight: 604 lbs. Warranty: 1 Year

ATTACHMENT CODE DESCRIPTION **IDENTIFIER**

SUGGESTED LIST PRICE USD (\$)

Select One Code From Each Required Category

BASE MACHINE

1453XF LP1184 - 7 Ft. 3-Point Land Plane 1,630.00

ATTACHMENTS FOR FIELD CONVERSION

Miscellaneous:

5TL15746 French Kit - Includes Operator's Manual and Safety Decals (LP11 Series) 44.50

LP1184 - 7 Ft. 3-Point Land Plane Continued	
THIS PAGE IS INTENTIONALLY LEFT BLANK	
THIS FACE IS INTENTIONALLY LEFT BLANK	

Landscaping

LP1196 - 8 Ft. 3-Point Land Plane

Equipment for Base Machine

3-Point Hitch: Category I and II iMatch Compatible (Quick-Attach System) Working Width: 96 In.
Tractor HP Recommendation: 22 to 75 HP Skid Shoes: Weld on, 3/16 In.
Shipping Weight: 732 lbs.
End Plate Thickness: 3/16 In.
Duty: Standard Duty
Cutting Edges: (2) Reversible
Assembly/Set-Up Time:

Unit Arrives Fully Assembled Approximate Operating Weight: 652 lbs. Warranty: 1 Year

ATTACHMENT
CODE IDENTIFIER DESCRIPTION

SUGGESTED LIST PRICE USD (\$)

Select One Code From Each Required Category

BASE MACHINE

1454XF LP1196 - 8 Ft. 3-Point Land Plane 1,685.00

ATTACHMENTS FOR FIELD CONVERSION

Miscellaneous:

5TL15746 French Kit - Includes Operator's Manual and Safety Decals (LP11 Series)

44.50

LP1196 - 8 Ft. 3-Point Land Plane
Continued

THIS PAGE IS INTENTIONALLY LEFT BLANK

Landscaping

LP1207 - 7 Ft. Heavy Duty 3-Point Land Plane

Equipment for Base Machine

Working Width: 84 In.
Shipping Weight: 1,048 lbs.
Operating Weight: 998 lbs.
3 Pt. Cat. 1 & 2
iMatch Compatible (Quick-Attach System)
Cat. 2 Quick Couple Compatible (Quick-Attach System)
Implement Code: 57.6
End Plate Thickness: 3/16 In.
Duty: Heavy Duty
Cutting Edges: (2) 1/2 x 6 in. Reversible

Adjustable Skid Shoes Skid Shoe Thickness: 3/8 in. Scarifier Shanks: (4) Available -Optional Assembly/Set-Up Time: 15 Minutes Warranty: 1 Year

Ballasting may be required. Please see your tractor operator's manual and your John Deere dealer.

SUGGESTED
ATTACHMENT LIST PRICE
CODE IDENTIFIER DESCRIPTION USD (\$)

Select One Code From Each Required Category

BASE MACHINE

1631XF LP1207 - 7 Ft. Heavy Duty 3-Point Land Plane 2,725.00

ATTACHMENTS FOR FIELD CONVERSION

Miscellaneous:

5TL1207KT Scarifier Kit (LP1207) 186.74

LP1207 - 7 Ft. Heavy Duty 3-Point Land Plane Continued

THIS PAGE IS INTENTIONALLY LEFT BLANK

Landscaping

LP1208 - 8 Ft. Heavy Duty 3-Point Land Plane

Equipment for Base Machine

Working Width: 96 In.
Shipping Weight: 1,160 lbs.
Operating Weight: 1,110 lbs.
3 Pt. Cat. 1 & 2
iMatch Compatible (Quick-Attach System)
Cat. 2 Quick Couple Compatible (Quick-Attach System)
Implement Code: 64.1
End Plate Thickness: 3/16 In.
Duty: Heavy Duty
Cutting Edges: (2) 1/2 x 6 in. Reversible

Adjustable Skid Shoes Skid Shoe Thickness: 3/8 in. Scarifier Shanks: (6) Available -Optional Assembly/Set-Up Time: 15 Minutes Warranty: 1 Year

Ballasting may be required. Please see your tractor operator's manual and your John Deere dealer.

SUGGESTED
ATTACHMENT LIST PRICE
CODE IDENTIFIER DESCRIPTION USD (\$)

Select One Code From Each Required Category

BASE MACHINE

1632XF LP1208 - 8 Ft. Heavy Duty 3-Point Land Plane 3,023.00

ATTACHMENTS FOR FIELD CONVERSION

Miscellaneous:

5TL1208KT Scarifier Kit (LP1208) 300.90

LP1208 - 8 Ft. Heavy Duty 3-Point Land Plane Continued

THIS PAGE IS INTENTIONALLY LEFT BLANK

Landscaping

LP1210 - 10 Ft. Heavy Duty 3-Point Land Plane

Equipment for Base Machine

Working Width: 120 In.
Shipping Weight: 1,304 lbs.
Operating Weight: 1,254 lbs.
3 Pt. Cat. 2
Cat. 2 Quick Couple Compatible (Quick-Attach System)
Implement Code: 72.4
End Plate Thickness: 3/16 In.
Duty: Heavy Duty
Cutting Edges: (2) 1/2 x 6 in. Reversible
Adjustable Skid Shoes

Skid Shoe Thickness: 3/8 in. Scarifier Shanks: (8) Available -Optional Assembly/Set-Up Time: 15 Minutes

Warranty: 1 Year

Ballasting may be required. Please see your tractor operator's manual and your John Deere dealer.

SUGGESTED
ATTACHMENT LIST PRICE
CODE IDENTIFIER DESCRIPTION USD (\$)

Select One Code From Each Required Category

BASE MACHINE

1633XF LP1210 - 10 Ft. Heavy Duty 3-Point Land Plane 3,502.00

ATTACHMENTS FOR FIELD CONVERSION

Miscellaneous:

5TL1210KT Scarifier Kit (LP1210) 400.97

LP1210 - 10 Ft. Heavy Duty 3-Point Land Plane Continued

THIS PAGE IS INTENTIONALLY LEFT BLANK

Landscaping

LR2060L - 5 Ft. Standard Duty Landscape Rake - Limited Category I

Equipment for Base Machine

Tine Dimensions:
 5/16 In. x 1 In. x 12 In. Spring Steel
Tine Spacing: 30 at 1 In.
Working Width: 60 In.
Tractor HP (Maximum): 25 HP
Parking Stand - Standard
Raking Positions:
 5 Forward (0, 15, 30 Degrees),
 5 Reverse (0, 15 Degrees)
3-Point Hitch:
 Limited Category I (Aftermarket
 Category 0 Lift Pins Available)
Pivot: 360 Degrees

Operating Weight: 168 lbs. Shipping Weight: 422 lbs. (Quantity of 2) Assembly/Set-Up Time: 30 Minutes Packaged Two Per Crate Gauge Wheels: Optional Warranty: 1 Year

	ATTACHMENT	
CODE	IDENTIFIER	DESCRIPTION

SUGGESTED LIST PRICE USD (\$)

Select One Code From Each Required Category

BASE MACHINE

1191XF LR2060L - 5 Ft. Standard Duty Landscape Rake - Limited Category I Order in multiples of two. 789.00

ATTACHMENTS FOR FIELD CONVERSION

Miscellaneous:

5WS343465 Dual Gauge Wheel Kit (LR2060L)

LR2060L - 5 Ft. Standard Duty Landscape Rake - Limited Category I Continued

THIS PAGE IS INTENTIONALLY LEFT BLANK

Landscaping

LR2072 - 6 Ft. Standard Duty Landscape Rake

Equipment for Base Machine

Duty: Standard Duty
Rake Width: 72 In.
3-Point Hitch:
 Category I
Tractor HP:
 19 to 40 HP
Tine Dimension:
 5/16 In. x 1 In. Spring Steel
Tine Spacing: 36 at 1 In.
Raking Positions:
 5 Forward (0, 15, 30 Degree) Each Side
 - 3 Reverse (0, 15 Degree) Each Side
Parking Stand: Standard
Approximate Operating Weight: 200 lbs.
Shipping Weight:

486 lbs. (Quantity 2)
Assembly/Set-Up Time:
30 Minutes (Approximate)
Pivot: 360 Degrees
Packaged 2 per Crate
Gauge Wheel Kit
 (Includes Two Wheels and Arms): Optional
Warranty: 1 Year

ATTACHMENT
CODE IDENTIFIER DESCRIPTION

SUGGESTED LIST PRICE USD (\$)

Select One Code From Each Required Category

BASE MACHINE

1181XF

LR2072 - 6 Ft. Standard Duty Landscape Rake Order in multiples of two.


913.00

ATTACHMENTS FOR FIELD CONVERSION

Miscellaneous:

5WS341775

Dual Gauge Wheel Kit (LR2072, LR2084, LR2172, LR2184 and LR2196)

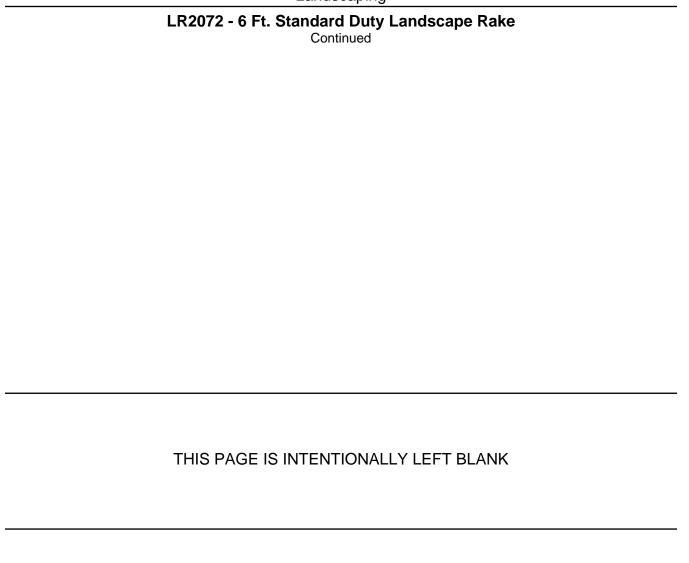

Landscaping

LR2084 - 7 Ft. Standard Duty Landscape Rake

Equipment for Base Machine

Duty: Standard Duty Rake Width: 84 In. 3-Point Hitch: Category I Tractor HP: 19 to 40 HP Tine Dimension: 5/16 In. x 1 In. Spring Steel Tine Spacing: 42 at 1 In. Raking Positions: 5 Forward (0, 15, 30 Degree) Each Side
- 3 Reverse (0, 15 Degree) Each Side
Parking Stand: Standard
Pivot: 360 Degrees Approximate Operating Weight:

221 lbs. Approximate Shipping Weight: 528 lbs. (Quantity 2)
Assembly/Set-Up Time:
30 Minutes (Approximate) Packaged 2 per Crate
Gauge Wheel Kit
(Includes Two Wheels and Arms): Optional
Warranty: 1 Year

ATTACHMENT CODE **IDENTIFIER** DESCRIPTION SUGGESTED **LIST PRICE** USD (\$)

Select One Code From Each Required Category

BASE MACHINE

1182XF LR2084 - 7 Ft. Standard Duty Landscape Rake

1,030.00 Order in multiples of two.

ATTACHMENTS FOR FIELD CONVERSION

Miscellaneous:

5WS341775 Dual Gauge Wheel Kit (LR2072, LR2084, LR2172, LR2184 and LR2196)

LR2084 - 7 Ft. Standard Duty Landscape Rake Continued

THIS PAGE IS INTENTIONALLY LEFT BLANK

Landscaping

LR2172 - 6 Ft. Medium Duty Landscape Rake

Equipment for Base Machine

Duty: Medium Duty
Rake Width: 72 In.
3-Point Hitch:
 Category I
Tractor HP:
 23 to 55 HP
Tines Dimension:
 5/16 In. x 1 In. Spring Steel
Tine Spacing: 36 at 1 In.
Raking Positions:
 5 Forward (0, 15, 30 Degree) Each Side
 - 3 Reverse (0, 15 Degree) Each Side
Parking Stand: Standard
Approximate Operating Weight: 282 lbs.

Approximate Shipping Weight: 368 lbs.
Assembly/Set-Up Time:
30 Minutes (Approximate)
Gauge Wheel Assembly Kit
(Two Wheels and Arms): Optional
6 Ft. Flip Down Grader Blade: Optional
Warranty: 1 Year

	ATTACHMENT	
CODE	IDENTIFIER	DESCRIPTION

SUGGESTED LIST PRICE USD (\$)

Select One Code From Each Required Category

BASE MACHINE


1201XF LR2172 - 6 Ft. Medium Duty Landscape Rake 1,273.00

ATTACHMENTS FOR FIELD CONVERSION

Miscellaneous:

5WS341986 6 Ft. Flip Down Blade (LR2172) 314.93

5WS341775 Dual Gauge Wheel Kit (LR2072, LR2084, LR2172, LR2184 and LR2196) 481.80

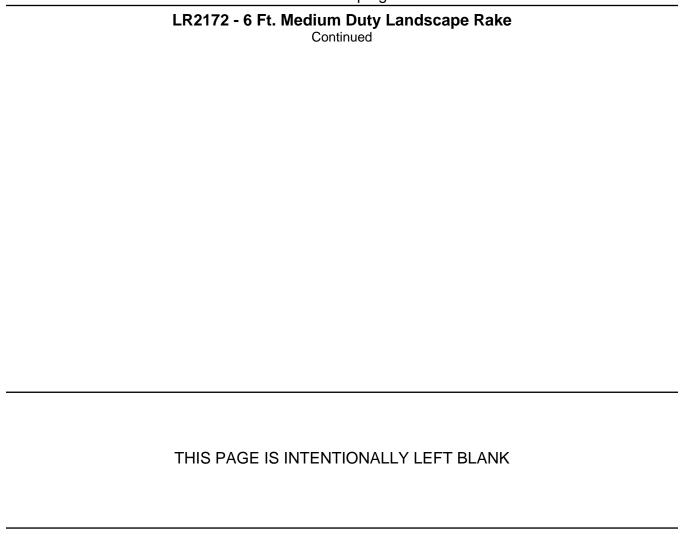

Landscaping

LR2184 - 7 Ft. Medium Duty Landscape Rake

Equipment for Base Machine

Duty: Medium Duty
Rake Width: 84 In.
3-Point Hitch:
 Category I
Tractor HP:
 23 to 55 HP
Tine Dimension:
 5/16 In. x 1 In. Spring Steel
Tine Spacing: 42 at 1 In.
Raking Positions:
 5 Forward (0, 15, 30 Degree) Each Side
 - 3 Reverse (0, 15 Degree) Each Side
Parking Stand: Standard
Approximate Operating Weight: 307 lbs.

Approximate Shipping Weight: 393 lbs.
Assembly/Set-Up Time:
 30 Minutes (Approximate)
Gauge Wheel Assembly Kit
 (Two Wheels and Arms): Optional
7 Ft. Flip Down Grader: Optional
Warranty: 1 Year

	ATTACHMENT	
CODE	IDENTIFIER	DESCRIPTION

SUGGESTED LIST PRICE USD (\$)

Select One Code From Each Required Category

BASE MACHINE


1202XF LR2184 - 7 Ft. Medium Duty Landscape Rake 1,370.00

ATTACHMENTS FOR FIELD CONVERSION

Miscellaneous:

5WS341987 7 Ft. Flip Down Blade (LR2184) 327.95

5WS341775 Dual Gauge Wheel Kit (LR2072, LR2084, LR2172, LR2184 and LR2196) 481.80

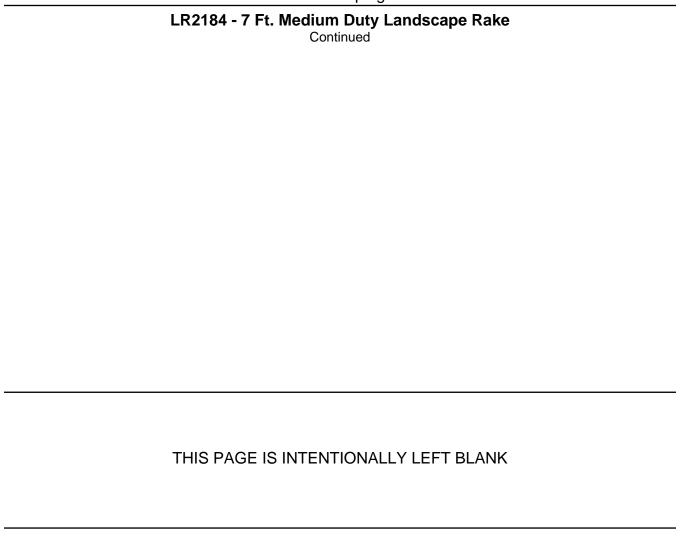

Landscaping

LR2196 - 8 Ft. Medium Duty Landscape Rake

Equipment for Base Machine

Duty: Medium Duty
Rake Width: 96 In.
3-Point Hitch:
Category I
Tractor HP: 27 to 55 HP
Tines Dimension:
5/16 In. x 1 In. Spring Steel
Tine Spacing: 48 at 1 In.
Raking Positions:
5 Forward (0, 15, 30 Degree) Each Side
- 3 Reverse (0, 15 Degree) Each Side
Approximate Operating Weight: 332 lbs.
Approximate Shipping Weight: 418 lbs.

Parking Stand: Standard
Assembly/Set-Up Time:
30 Minutes (Approximate)
Gauge Wheel Assembly Kit
(Two Wheels and Arms): Optional
8 Ft. Flip Down Grader: Optional
Warranty: 1 Year

	ATTACHMENT		
CODE	IDENTIFIER	DESCRIPTION	

SUGGESTED LIST PRICE USD (\$)

Select One Code From Each Required Category

BASE MACHINE

1203XF LR2196 - 8 Ft. Medium Duty Landscape Rake 1,463.00

ATTACHMENTS FOR FIELD CONVERSION

Miscellaneous:

5WS341988 8 Ft. Flip Down Blade (LR2196) 375.27

5WS341775 Dual Gauge Wheel Kit (LR2072, LR2084, LR2172, LR2184 and LR2196) 481.80

Continued			
	THIS PAGE IS INTENTIONALLY LEFT BLANK		

Landscaping

LR5060 - 5 Ft. Standard Duty Landscape Rake

Equipment for Base Machine

Duty: Standard Duty
Rake Width: 60 In.
3-Point Hitch:
Category I
Tractor HP:
15 to 35 HP
Tine Dimension:
5/16 In. x 1 In. Spring Steel
Tine Spacing: 36 at 1 In.
Raking Positions:
5 Forward (0, 15, 30 Degree) Each Side
- 5 Reverse (0, 15, 30 Degree) Each Side
Parking Stand: Standard
Approximate Operating Weight: 248 lbs.

Shipping Weight:
554 lbs. (Quantity 2)
Assembly/Set-Up Time:
15 Minutes (Approximate)
Pivot: 360 Degrees
Packaged 2 per Crate
Gauge Wheel Kit: NA
Warranty: 1 Year

ATTACHMENT
CODE IDENTIFIER DESCRIPTION

SUGGESTED LIST PRICE USD (\$)

Select One Code From Each Required Category

BASE MACHINE

1661XF

LR5060 - 5 Ft. Standard Duty Landscape Rake Order in multiples of two.

LR5060 - 5 Ft. Standard Duty Landscape Rake Continued

THIS PAGE IS INTENTIONALLY LEFT BLANK

09 November 2	2015 US 8	& Canada

Landscaping

LR5072 - 6 Ft. Standard Duty Landscape Rake

Equipment for Base Machine

Duty: Standard Duty
Rake Width: 72 In.
3-Point Hitch:
Category I
Tractor HP:
20 to 38 HP
Tine Dimension:
5/16 In. x 1 In. Spring Steel
Tine Spacing: 36 at 1 In.
Raking Positions:
5 Forward (0, 15, 30 Degree) Each Side
- 5 Reverse (0, 15, 30 Degree) Each Side
Parking Stand: Standard
Approximate Operating Weight: 272 lbs.

Shipping Weight:
602 lbs. (Quantity 2)
Assembly/Set-Up Time:
15 Minutes (Approximate)
Pivot: 360 Degrees
Packaged 2 per Crate
Gauge Wheel Kit: NA
Warranty: 1 Year

ATTACHMENT
CODE IDENTIFIER DESCRIPTION

SUGGESTED LIST PRICE USD (\$)

Select One Code From Each Required Category

BASE MACHINE

1662XF

LR5072 - 6 Ft. Standard Duty Landscape Rake Order in multiples of two.

LR5072 - 6 Ft. Standard Duty Landscape Rake

	Continued	
THIS PAGE	E IS INTENTIONALLY LEFT BLANK	

Landscaping

LR5084 - 7 Ft. Standard Duty Landscape Rake

Equipment for Base Machine

Duty: Standard Duty
Rake Width: 84 In.
3-Point Hitch:
Category I
Tractor HP:
20 to 50 HP
Tine Dimension:
5/16 In. x 1 In. Spring Steel
Tine Spacing: 36 at 1 In.
Raking Positions:
5 Forward (0, 15, 30 Degree) Each Side
- 5 Reverse (0, 15, 30 Degree) Each Side
Parking Stand: Standard
Approximate Operating Weight: 287 lbs.

Shipping Weight:
632 lbs. (Quantity 2)
Assembly/Set-Up Time:
15 Minutes (Approximate)
Pivot: 360 Degrees
Packaged 2 per Crate
Gauge Wheel Kit: NA
Warranty: 1 Year

ATTACHMENT
CODE IDENTIFIER DESCRIPTION

SUGGESTED LIST PRICE USD (\$)

Select One Code From Each Required Category

BASE MACHINE

1663XF

LR5084 - 7 Ft. Standard Duty Landscape Rake Order in multiples of two.

LR5084 - 7 Ft. Standard Duty Landscape Rake Continued

THIS PAGE IS INTENTIONALLY LEFT BLANK

Landscaping

LR5096 - 8 Ft. Standard Duty Landscape Rake

Equipment for Base Machine

Duty: Standard Duty
Rake Width: 96 In.
3-Point Hitch:
Category I
Tractor HP:
20 to 50 HP
Tine Dimension:
5/16 In. x 1 In. Spring Steel
Tine Spacing: 36 at 1 In.
Raking Positions:
5 Forward (0, 15, 30 Degree) Each Side
- 5 Reverse (0, 15, 30 Degree) Each Side
Parking Stand: Standard
Approximate Operating Weight: 324 lbs.

Shipping Weight:
706 lbs. (Quantity 2)
Assembly/Set-Up Time:
15 Minutes (Approximate)
Pivot: 360 Degrees
Packaged 2 per Crate
Gauge Wheel Kit: NA
Warranty: 1 Year

ATTACHMENT
CODE IDENTIFIER DESCRIPTION

SUGGESTED LIST PRICE USD (\$)

Select One Code From Each Required Category

BASE MACHINE

1664XF

LR5096 - 8 Ft. Standard Duty Landscape Rake Order in multiples of two.

LR5096 - 8 Ft. Standard Duty Landscape Rake Continued

THIS PAGE IS INTENTIONALLY LEFT BLANK

Landscaping

LR5048L - 4 Ft. Limited Category 1 Economy Duty Landscape Rake

Equipment for Base Machine

Duty: Economy Duty
Rake Width: 48 In.
3-Point Hitch:
 Limited Category I
Tractor HP: 18 PTO HP Max
Tine Dimension:
 5/16 In. x 1 In. Spring Steel
Tine Spacing: 24 at 1 In.
Raking Positions:
 5 Forward (0, 15, 30 Degree) Each Side
 - 5 Reverse (0, 15, 30 Degree) Each Side
Parking Stand: Standard
Approximate Operating Weight: 186 lbs.
Shipping Weight:

430 lbs. (Quantity 2)
Assembly/Set-Up Time:
15 Minutes (Approximate) - Per Pair
Pivot: 360 Degrees
Packaged 2 per Crate
Gauge Wheel Kit: Yes
Warranty: 1 Year

ATTACHMENT
CODE IDENTIFIER DESCRIPTION

SUGGESTED LIST PRICE USD (\$)

Select One Code From Each Required Category

BASE MACHINE

1761XF

LR5048L - 4 Ft. Limited Category 1 Economy Duty Landscape Rake Order in multiples of two.

614.00

ATTACHMENTS FOR FIELD CONVERSION

Miscellaneous:

5TITE511225

LR50L Gauge Wheel Kit Includes two solid wheels, two mounting brackets, and hardware.

LR5048L - 4 Ft. Limited Category 1 Economy Duty Landscape Rake Continued

THIS PAGE IS INTENTIONALLY LEFT BLANK

Landscaping

LR5060L - 5 Ft. Limited Category 1 Economy Duty Landscape Rake

Equipment for Base Machine

Duty: Economy Duty
Rake Width: 60 In.
3-Point Hitch:
 Limited Category I
Tractor HP: 18 PTO HP Max
Tine Dimension:
 5/16 In. x 1 In. Spring Steel
Tine Spacing: 30 at 1 In.
Raking Positions:
 5 Forward (0, 15, 30 Degree) Each Side
 - 5 Reverse (0, 15, 30 Degree) Each Side
Parking Stand: Standard
Approximate Operating Weight: 205 lbs.
Shipping Weight:

468 lbs. (Quantity 2)
Assembly/Set-Up Time:
15 Minutes (Approximate) - Per Pair
Pivot: 360 Degrees
Packaged 2 per Crate
Gauge Wheel Kit: Yes
Warranty: 1 Year

ATTACHMENT
CODE IDENTIFIER DESCRIPTION

SUGGESTED LIST PRICE USD (\$)

Select One Code From Each Required Category

BASE MACHINE

1762XF

LR5060L - 5 Ft. Limited Category 1 Economy Duty Landscape Rake Order in multiples of two.

707.00

ATTACHMENTS FOR FIELD CONVERSION

Miscellaneous:

5TITE511225

LR50L Gauge Wheel Kit Includes two solid wheels, two mounting brackets, and hardware.

LR5060L - 5 Ft. Limited Category 1 Economy Duty Landscape Rake Continued

THIS PAGE IS INTENTIONALLY LEFT BLANK

Landscaping

PM1001 Integral Middle Buster

Equipment for Base Machine

Hitch: Lift-type, Category I, iMatch Compatible Working Depth: working Depth:
 Up to 12 In. (304.8 mm)
Transport Length:
 15 In. (381 mm)
Transport Width:
 32 In. (812.8 mm)
Transport Height:
 32 In. (812.8 mm) Tractor Engine HP Range: 25 - 45 HP Blade: Double-Wing Cutting Blade, 19 In. (482.6 mm) x 11 In. (279.4 mm)

ATTACHMENT CODE **IDENTIFIER**

DESCRIPTION

SUGGESTED LIST PRICE USD (\$)

Select One Code From Each Required Category

BASE MACHINE

3461XF

PM1001 Integral Middle Buster Order in multiples of two.

246.00

ATTACHMENTS FOR FIELD CONVERSION

Miscellaneous:

5TITE511154

French Kit - Includes Operator's Manual, Parts Catalog and Safety Decals PM1001

PM1001 Integral Middle Buster Continued

THIS PAGE IS INTENTIONALLY LEFT BLANK

09 November	2015	US	&	Canada

Landscaping

MF2204 - 42 in. Wide 3-Point Category I Hitch Mulch Finisher

Equipment for Base Machine

Machine Weight: 753 lbs.
Tractor HP Range: 30-50 HP
Working Width: 42 In.
Unit Length: 53 In.
Unit Height: 35 In.
Number of Blades: 6
Blade Diameter: 16 In.
Blade Thickness: 3 mm
Blade Spacing: 8.25 In.
Blade Type: Notched
Bearing Hanger:
.375 In. Formed Plate with Reinforcement,
2 Each .625 U-bolts per Hanger
Bearing Type: 1 In. Square Sealed Bearing
Gang Axle: 1 In. Square
Gang Adjustment: Pinned Adjustment
3-Point Hitch Type: Category I

iMatch Compatible: Yes
Number of S-Tines: 5
1.75 In. Reversible Chisel Point: 5 (Optional Order Through Parts)
9 In. Sweep: 5 (Standard)
Right Turning Point: 4 (Optional - Order Through
Parts)
Left Turning Point: 4 (Optional - Order Through
Parts)
Approximate Set-Up Time: 1 Man Hour

ATTACHMENT
CODE IDENTIFIER DESCRIPTION

SUGGESTED LIST PRICE USD (\$)

Select One Code From Each Required Category

BASE MACHINE

3521XF MF2204 - 42 in. Wide 3-Point Category I Hitch Mulch Finisher

Includes two S-tine toolbars.

2,528.00

ATTACHMENTS FOR FIELD CONVERSION

Miscellaneous:

5PM50062698 French Kit - Includes Operator's Manual and Safety Decals (MF22 Series)

See Parts

5PM50062291 Rolling Basket Attachment 1,754.62

MF2204 - 42 in. Wide 3-Point Category I Hitch Mulch Finisher Continued THIS PAGE IS INTENTIONALLY LEFT BLANK

Landscaping

MF2206 - 60 in. Wide 3-Point Category I/II Hitch Mulch Finisher

Equipment for Base Machine

Machine Weight: 1066 lbs.
Tractor HP Range: 45-75 HP
Working Width: 60 In.
Unit Length: 74 In.
Unit Height: 35 In.
Number of Blades: 8
Blade Diameter: 18 In.
Blade Thickness: 3.5 mm
Blade Spacing: 7.50 In.
Blade Type: Notched
Bearing Hanger:
.375 Formed Plate with Reinforcement,
2 Each .625 U-bolts per hanger
Bearing Type: 1 In. Square Sealed Bearing
Gang Axle: 1 In. Square
Gang Adjustment: Pinned Adjustment

iMatch Compatible: Yes
Number of S-Tines: 7
1.75 In. Reversible Chisel Point: 7 (Optional Order Through Parts)
9 In. Sweep: 7 (Standard)
Right Turning Point: 3 (Optional - Order Through
Parts)
Left Turning Point: 3 (Optional - Order Through
Parts)
Approximate Set-Up Time: 1 Man Hour

ATTACHMENT
CODE IDENTIFIER DESCRIPTION

3-Point Hitch Type: Category I/II

SUGGESTED LIST PRICE USD (\$)

Select One Code From Each Required Category

BASE MACHINE

3523XF MF2206 - 60 in. Wide 3-Point Category I/II Hitch Mulch Finisher

Includes two S-tine toolbars.

3,935.00

ATTACHMENTS FOR FIELD CONVERSION

Miscellaneous:

5PM50062698 French Kit - Includes Operator's Manual and Safety Decals (MF22 Series)

See Parts

5PM50062292 Rolling Basket Attachment 1,904.21

MF2206 - 60 in. Wide 3-Point Category I/II Hitch Mulch Finisher Continued THIS PAGE IS INTENTIONALLY LEFT BLANK

Landscaping

MF2208 - 82 in. Wide 3-Point Category I/II Hitch Mulch Finisher

Equipment for Base Machine

Machine Weight: 1242 lbs.
Tractor HP Range: 60-100 HP
Working Width: 82 In.
Unit Length: 74 In.
Unit Height: 35 In.
Number of Blades: 12
Blade Diameter: 18 In.
Blade Thickness: 3.5 mm
Blade Spacing: 7.50 In.
Blade Type: Notched
Bearing Hanger:
.375 In. Formed Plate with Reinforcement,
2 Each .625 U-bolts per Hanger
Bearing Type: 1 In. Square Sealed Bearing
Gang Axle: 1 In. Square
Gang Adjustment: Pinned Adjustment
3-Point Hitch Type: Category I/II

iMatch Compatible: Yes
Number of S-Tines: 9
1.75 In. Reversible Chisel Point: 9 (Optional Order Through Parts)
9 In. Sweep: 9 (Standard)
Right Turning Point: 4 (Optional - Order Through
Parts)
Left Turning Point: 4 (Optional - Order Through
Parts)
Approximate Set-Up Time: 1 Man Hour

ATTACHMENT
CODE IDENTIFIER DESCRIPTION

SUGGESTED LIST PRICE USD (\$)

Select One Code From Each Required Category

BASE MACHINE

3524XF MF2208 - 82 in. Wide 3-Point Category I/II Hitch Mulch Finisher

4,497.00

 ${\it Includes two S-tine toolbars}.$

ATTACHMENTS FOR FIELD CONVERSION

Miscellaneous:

5PM50062698 French Kit - Includes Operator's Manual and Safety Decals (MF22 Series)

See Parts

5PM50062293 Rolling Basket Attachment 2,122.08

MF2208 - 82 in. Wide 3-Point Category I/II Hitch Mulch Finisher Continued THIS PAGE IS INTENTIONALLY LEFT BLANK

Landscaping

PHA006 Post Hole Auger 6 In. for PHD100

Equipment for Base Machine

Diameter: 6 In.
Length: 36 In.
Weight: 24 lbs.
Flighting Type: Single
Flighting Thickness: 3/16 In.
Compatible With Digger Model Number(s): PHD100

CODE	ATTACHMENT IDENTIFIER	DESCRIPTION	SUGGESTED LIST PRICE USD (\$)
		Select One Code From Each Required Category]
		BASE MACHINE	

1211XF PHA006 Post Hole Auger 6 In. for PHD100 313.00

PHA006 Post Hole Auger 6 In. for PHD100 Continued

THIS PAGE IS INTENTIONALLY LEFT BLANK

Landscaping

PHA009 Post Hole Auger 9 In. for PHD100 Equipment for Base Machine

Diameter: 9 In.
Length: 36 In.
Weight: 42 lbs.
Flighting Type: Double
Flighting Thickness: 3/16 In.
Compatible With Digger Model Number(s): PHD100

CODE	ATTACHMENT IDENTIFIER	DESCRIPTION	SUGGESTED LIST PRICE USD (\$)
		Select One Code From Each Required Category	

BASE MACHINE

1212XF PHA009 Post Hole Auger 9 In. for PHD100 334.00

PHA009 Post Hole Auger 9 In. for PHD100

Continued
THIS PAGE IS INTENTIONALLY LEFT BLANK

Landscaping

PHA012 Post Hole Auger 12 In. for PHD100 Equipment for Base Machine

Diameter: 12 In.
Length: 36 In.
Weight: 52 lbs.
Flighting Type: Double
Flighting Thickness: 3/16 In.
Compatible With Digger Model Number(s): PHD100

CODE	ATTACHMENT IDENTIFIER	DESCRIPTION	SUGGESTED LIST PRICE USD (\$)
		Select One Code From Each Required Category	

BASE MACHINE

1213XF PHA012 Post Hole Auger 12 In. for PHD100 416.00

PHA012 Post Hole Auger 12 In. for PHD100 Continued

THIS PAGE	IS INTENTIONA	IIVIEET BI ANK

Landscaping

PHA106 Post Hole Auger 6 In. for PHD200/300/400

Equipment for Base Machine

Diameter: 6 In.
Length: 48 In.
Weight: 32 lbs.
Flighting Type: Single
Flighting Thickness: 3/16 In.
Compatible With Digger Model Number(s):
PHD200, PHD300, PHD400

CODE	ATTACHMENT IDENTIFIER	DESCRIPTION	SUGGESTED LIST PRICE USD (\$)
		Select One Code From Each Required Category	
1214XF		BASE MACHINE PHA106 Post Hole Auger 6 In. for PHD200/300/400	314.00

PHA106 Post Hole Auger 6 In. for PHD200/300/400 Continued

THIS PAGE IS INTENTIONALLY LEFT BLANK

Landscaping

PHA109 Post Hole Auger 9 In. for PHD200/300/400

Equipment for Base Machine

Diameter: 9 In.
Length: 48 In.
Weight: 55 lbs.
Flighting Type: Double
Flighting Thickness: 3/16 In.
Compatible With Digger Model Number(s):
PHD200, PHD300, PHD400

CODE	ATTACHMENT IDENTIFIER	DESCRIPTION	SUGGESTED LIST PRICE USD (\$)
		Select One Code From Each Required Category	
1215XF		BASE MACHINE PHA109 Post Hole Auger 9 In. for PHD200/300/400	330.00

PHA109 Post Hole Auger 9 In. for PHD200/300/400 Continued

THIS PAGE IS INTENTIONALLY LEFT BLANK	THIS PAGE IS INTENTIONALLY LEFT BLANK	

Landscaping

PHA112 Post Hole Auger 12 In. for PHD200/300/400

Equipment for Base Machine

Diameter: 12 In.
Length: 48 In.
Weight: 55 lbs.
Flighting Type: Double
Flighting Thickness: 3/16 In.
Compatible With Digger Model Number(s):
PHD200, PHD300, PHD400

1216XF

CODE	ATTACHMENT IDENTIFIER	DESCRIPTION	SUGGESTED LIST PRICE USD (\$)
		Select One Code From Each Required Category	
		BASE MACHINE	

402.00

PHA112 Post Hole Auger 12 In. for PHD200/300/400

PHA112 Post Hole Auger 12 In. for PHD200/300/400 Continued

THIS PAGE IS INTENTIONALLY LEFT BLANK

Landscaping

PHA118 Post Hole Auger 18 In. for PHD300/400

Equipment for Base Machine

Diameter: 18 In.
Length: 48 In.
Weight: 80 lbs.
Flighting Type: Double
Flighting Thickness: 1/4 In.
Compatible With Digger Model Number(s):
PHD300, PHD400

1217XF

CODE	ATTACHMENT IDENTIFIER	DESCRIPTION	SUGGESTED LIST PRICE USD (\$)
		Select One Code From Each Required Category	
		BASE MACHINE	

PHA118 Post Hole Auger 18 In. for PHD300/400

542.00

PHA118 Post Hole Auger 18 In. for PHD300/400 Continued

THIS PAGE IS INTENTIONALLY LEFT BLANK

09 November 2014	EIIC O Canada

Landscaping

PHA124 Post Hole Auger 24 In. for PHD300/400

Equipment for Base Machine

Diameter: 24 In.
Length: 48 In.
Weight: 105 lbs.
Flighting Type: Double
Flighting Thickness: 1/4 In.
Compatible With Digger Model Number(s):
PHD300, PHD400

CODE	ATTACHMENT IDENTIFIER	DESCRIPTION	SUGGESTED LIST PRICE USD (\$)
		Select One Code From Each Required Category]

BASE MACHINE

1218XF PHA124 Post Hole Auger 24 In. for PHD300/400 743.00

PHA124 Post Hole Auger 24 In. for PHD300/400 Continued

THIS PAGE IS INTENTIONALLY LEFT BLANK

Landscaping

PHA130 Post Hole Auger 30 In. for PHD300/400

Equipment for Base Machine

Diameter: 30 In.
Length: 44 In.
Weight: 213 lbs.
Flighting Type:
 Double (15 In. and 30 In.)
Flighting Thickness: 5/16 In.
Compatible With Digger Model Number(s):

PHD300, PHD400

ATTACHMENT
CODE IDENTIFIER DESCRIPTION

SUGGESTED LIST PRICE USD (\$)

Select One Code From Each Required Category

BASE MACHINE

1219XF PHA130 Post Hole Auger 30 In. for PHD300/400

Tapered flighting for planting trees.

1,539.00

PHA130 Post Hole Auger 30 In. for PHD300/400 Continued

THIS PAGE IS INTENTIONALLY LEFT BLANK

Landscaping

PHD100 Post Hole Digger Up to 25HP Category I Hitch

Equipment for Base Machine

Boom OD: 2-7/8 In. Yoke OD: 2-3/8 In. Auger Speed: 180 RPM Gearbox Gear Ratio: 3:1 Gearbox HP Rating: 25 HP PTO HP Range: 18-25 HP

3-Point Hitch Category: Category I Works with Auger Model Numbers: PHA006, PHA009, PHA012

Weight: 112 lbs. Shipping Weight (2 per Crate): 330 lbs. Set-Up Time: 20 Minutes

SUGGESTED LIST PRICE USD (\$)

ATTACHMENT IDENTIFIER

CODE

DESCRIPTION

Select One Code From Each Required Category

BASE MACHINE

1221XF PHD100 Post Hole Digger Up to 25HP Category I Hitch

Order in multiples of two.

1,100.00

0.00

ATTACHMENTS ORDER AS DESIRED

9000 Hook-Up Stand 471.00

ATTACHMENTS FOR FIELD CONVERSION

Miscellaneous:

For customer use.

French OM & Decal Kit Post Hole Diggers 5BP950960B

Destination of Quebec only. Includes French safety decals and manul.

5BP480099851 Post Hole Digger Hookup Stand 508.68

For customer use.

PHD100 Post Hole Digger Up to 25HP Category I Hitch Continued THIS PAGE IS INTENTIONALLY LEFT BLANK

Landscaping

PHD200 Post Hole Digger Up to 40HP Category I Hitch

Equipment for Base Machine

Boom OD: 3-1/2 In.
Yoke OD: 2-7/8 In.
Auger Speed: 180 RPM
Gearbox Gear Ratio: 3:1
Gearbox HP Rating: 40 HP
PTO HP Range: 18-40 HP
3-Point Hitch Category: Category I
Works with Auger Model Numbers:
PHA106, PHA109, PHA112

For customer use.

Weight: 200 lbs. Shipping Weight (2 per Crate): 470 lbs. Set-Up Time: 20 Minutes

CODE	ATTACHMENT IDENTIFIER	DESCRIPTION	SUGGESTED LIST PRICE USD (\$)
		Select One Code From Each Required Category	l
		BASE MACHINE	
1222XF		PHD200 Post Hole Digger Up to 40HP Category I Hitch Order in multiples of two.	1,203.00
9000		ATTACHMENTS ORDER AS DESIRED Hook-Up Stand For customer use.	471.00
9010		Post Hole Digger Down Force Kit for PHD200	634.00
		ATTACHMENTS FOR FIELD CONVERSION	
	5BP950960B	Miscellaneous: French OM & Decal Kit Post Hole Diggers Destination of Quebec only. Includes French safety decals and manul.	0.00
	5BP48PHD005	Post Hole Digger Down Force Kit PHD200	684.72
	5BP480099851	Post Hole Digger Hookup Stand	508.68

PHD200 Post Hole Digger Up to 40HP Category I Hitch Continued THIS PAGE IS INTENTIONALLY LEFT BLANK

Landscaping

PHD300 Post Hole Digger Up to 50HP Category I & II Hitch

Equipment for Base Machine

Boom OD: 3-1/2 In. Reinforced Yoke OD: 2-7/8 In. Reinforced Auger Speed: 154 RPM Gearbox Gear Ratio: 3.5:1 Gearbox HP Rating: 50 HP PTO HP Range: 18-50 HP 3-Point Hitch Category: Category I or II Works with Auger Model Numbers: PHA106, PHA109, PHA112, PHA118, PHA124, PHA132

Weight: 230 lbs. Shipping Weight (2 per Crate): 550 lbs. Set-Up Time: 20 Minutes

			SUGGESTED
	ATTACHMENT		LIST PRICE
CODE	IDENTIFIER	DESCRIPTION	USD (\$)
			、、 、

Select One Code From Each Required Category

		BASE MACHINE	
1223XF		PHD300 Post Hole Digger Up to 50HP Category I & II Hitch Order in multiples of two.	1,452.00
9000		ATTACHMENTS ORDER AS DESIRED Hook-Up Stand	471.00
		For customer use.	
9010		Post Hole Digger Down Force Kit for PHD300 and PHD400	654.00
9020		Post Hole Digger Auger Positioning Handle	169.00
		ATTACHMENTS FOR FIELD CONVERSION	
	5BP950960B	Miscellaneous: French OM & Decal Kit Post Hole Diggers Destination of Quebec only. Includes French safety decals and manul.	0.00
	5BP48PHD003	Post Hole Digger Auger Positioning Handle	182.52
	5BP48PHD002	Post Hole Digger Down Force Kit	706.32
	5BP480099851	Post Hole Digger Hookup Stand For customer use.	508.68

PHD300 Post Hole Digger Up to 50HP Category I & II Hitch Continued THIS PAGE IS INTENTIONALLY LEFT BLANK

Landscaping

PHD400 Post Hole Digger Up to 90HP Category I & II Hitch

Equipment for Base Machine

Boom OD: 3-1/2 In. Reinforced Yoke OD: 2-7/8 In. Reinforced Auger Speed: 135 RPM Gearbox Gear Ratio: 4:1 Gearbox HP Rating: 90 HP PTO HP Range: 40-90 HP 3-Point Hitch Category: Category I or II Works with Auger Model Numbers: PHA106, PHA109, PHA112, PHA118, PHA124, PHA132

Weight: 260 lbs. Shipping Weight (2 per Crate): 610 lbs. Set-Up Time: 20 Minutes

			SUGGESTED
	ATTACHMENT		LIST PRICE
CODE	IDENTIFIER	DESCRIPTION	USD (\$)
			、、 、

Select One Code From Each Required Category

	BASE MACHINE	
1224XF	PHD400 Post Hole Digger Up to 90HP Category I & II Hitch Order in multiples of two.	1,758.00
	ATTACHMENTS ORDER AS DESIRED	
9000	Hook-Up Stand For customer use.	471.00
9010	Post Hole Digger Down Force Kit for PHD300 and PHD400	654.00
9020	Post Hole Digger Auger Positioning Handle	169.00
	ATTACHMENTS FOR FIELD CONVERSION	
5BP95096	Miscellaneous: French OM & Decal Kit Post Hole Diggers Destination of Quebec only. Includes French safety decals and manul.	0.00
5BP48PHI	Post Hole Digger Auger Positioning Handle	182.52
5BP48PHI	2002 Post Hole Digger Down Force Kit	706.32
5BP48009	9851 Post Hole Digger Hookup Stand For customer use.	508.68

PHD400 Post Hole Digger Up to 90HP Category I & II Hitch Continued THIS PAGE IS INTENTIONALLY LEFT BLANK

Landscaping

PR1148 - 48 In. Power Rake

Equipment for Base Machine

Function: Landscaping and Site Development
Hitch Compatibility:
Category I and iMatch Compatible
Rotor: Cylindrical with
Welded Carbide Teeth
Carbide Teeth Per Rotor: 76
Depth Control: Dual Independently
Adjustable Gauge Wheels
Gauge Wheel Description: 13 x 5.00-6
Gauge Wheel Height Adjustment:
Manual Split Clamp
Angle Adjustment: Hydraulic
Hydraulic Cylinder Manufacturer:
Best Metal Ind.
Hydraulic Cylinder Description: 1.50 In.
Bore 0.75 In. Rod 6.00 In. Stroke
Working Angles R or L: 0-15 Degrees
Height: 34 In.
Transport Width: 54 In.
Working Width: 48 In.
Working Width at Maximum Angle: 46 In.
Roll-Back Barrier Range:
5/16 In. to 3-3/16 In.
Length: 54 In.
Side Drive: Chain ASA 50-2
Chain Case Lube:
Cenex 365 #00 Fluid grease
Tubing Size: 3 In. x 3 In.

Tubing Wall Thickness: 3/16 In. Tractor PTO Speed (RPM): 540 Driveline Manufacturer: Weasler Primary Driveline Description: 14R with Cut-out Clutch Secondary Driveline Description: 1-3/8 In. - 6 Splines Direct to Chain Case Clutch/Torque Setting (Number): 316 Tractor PTO HP Requirements Minimum-Maximum: 15-22 HP Tractor Hydraulic Requirements: 1500 PSI Gearbox Manufacturer: Weasler Gearbox Description: Straight Bevel Gear in Oil Bath Gearbox Oil Recommendation: 85-90W Gearbox Reduction: 2:1
Rotor Speed (RPM): 285
Rotor Direction of Rotation: Against DOT Approximate Operating Weight: 500 lbs. Approximate Shipping Weight: 700 lbs. Parking Stand: Standard
Approximate Set-Up Time: 20 Minutes Warranty: 1 Year

ATTACHMENT
CODE IDENTIFIER DESCRIPTION

SUGGESTED LIST PRICE USD (\$)

Select One Code From Each Required Category

BASE MACHINE

1231XF PR1148 - 48 In. Power Rake 8,849.00

PR1148 - 48 In. Power Rake Continued

THIS PAGE IS INTENTIONALLY LEFT BLANK

Landscaping

PR1160 - 60 In. Power Rake

Equipment for Base Machine

Function: Landscaping and Site Development
Hitch Compatibility:
Category I and iMatch Compatible
Rotor: Cylindrical with
Welded Carbide Teeth
Carbide Teeth per Rotor: 88
Depth Control: Dual Independently
Adjustable Gauge Wheels
Gauge Wheel Description: 13 X 5.00-6
Gauge Wheel Height Adjustment:
Manual Split Clamp
Angle Adjustment: Hydraulic
Hydraulic Cylinder Manufacturer:
Best Metal Ind.
Hydraulic Cylinder Description: 1.50 In.
Bore 0.75 In. Rod 6.00 In. Stroke
Working Angles R or L: 0-15 Degrees
Height: 36 In.
Transport Width: 64 In.
Working Width: 56 In.
Working Width: 56 In.
Length: 55 In.
Side Drive: Chain ASA 50-2
Chain Case Lube:
Cenex 365 #00 Fluid Grease
Tubing Wall Thickness: 3/16 In.

Tractor PTO Speed (RPM): 540
Driveline Manufacturer: Weasler
Primary Driveline Description: 14R
Secondary Driveline Description:
1-3/8 In. 6 Splines to Chain Case
with Friction Clutch
Clutch/Torque Setting (Number): 508
Tractor PTO HP Requirements
Minimum-Maximum: 18-35 HP
Tractor Hydraulic Requirements: 1500 PSI
Gearbox Manufacturer: Superior
Gearbox Description:
Straight Bevel Gear in Oil Bath
Gearbox Oil Recommendation: 85-90W
Gearbox Reduction: 2:1
Rotor Speed (RPM): 285
Rotor Direction of Rotation: Against DOT
Approximate Operating Weight: 550 lbs.
Approximate Shipping Weight: 750 lbs.
Parking Stand: Standard
Approximate Set-Up Time:
20 Minutes
Warranty: 1 Year

ATTACHMENT
CODE IDENTIFIER DESCRIPTION

SUGGESTED LIST PRICE USD (\$)

Select One Code From Each Required Category

BASE MACHINE

1232XF PR1160 - 60 In. Power Rake 9,409.00

ATTACHMENTS - ORDER AS DESIRED

9000 Grass Seed Attachment for PR1160 6,119.00

ATTACHMENTS FOR FIELD CONVERSION

Miscellaneous:

5SPPS50814 Grass Seed Attachment for PR1160 6,608.52

PR1160 - 60 In. Power Rake Continued

THIS PAGE IS INTENTIONALLY LEFT BLANK

Landscaping

PR1172 - 72 In. Power Rake

Equipment for Base Machine

Function: Landscaping and Site Development
Hitch Compatibility:
Category I and iMatch Compatible
Rotor: Cylindrical with
Welded Carbide Teeth
Carbide Teeth per Rotor: 114
Depth Control: Dual Independently
Adjustable Gauge Wheels
Gauge Wheel Description: 16.5 x 6.5-8
Gauge Wheel Height Adjustment:
Manual Split Clamp
Angle Adjustment: Hydraulic
Hydraulic Cylinder Manufacturer:
Best Metal Ind.
Hydraulic Cylinder Description: 1.50 In.
Bore 0.75 In. Rod 8.00 In. Stroke
Working Angles R or L: 0-15 Degrees
Height: 40 In.
Transport Width: 81 In.
Working Width: 72 In.
Working Width: 72 In.
Working Width at Maximum Angle: 69.5 In.
Roll-Back Barrier Range:
5/16 In. to 2-15/16 In.
Length: 62 In.
Side Drive: Chain ASA 60-2
Chain Case Lube:
Cenex 365 #00 Fluid Grease

Tubing Wall Thickness: 1/4 In.
Tractor PTO Speed (RPM): 540
Driveline Manufacturer: Weasler
Primary Driveline Description: 14R
Secondary Driveline Description:
35R with Friction Clutch
Clutch/Torque Setting (Number): 1016
Tractor PTO HP Requirements
Minimum-Maximum: 30-40 HP
Tractor Hydraulic Requirements: 1500 PSI
Gearbox Manufacturer: Superior
Gearbox Description:
Straight Bevel Gear in Oil Bath
Gearbox Oil Recommendation: 85-90W
Gearbox Reduction: 2:1
Rotor Speed (RPM): 270
Rotor Direction of Rotation: Against DOT
Approximate Operating Weight: 830 lbs.
Approximate Shipping Weight: 1100 lbs.
Parking Stand: Standard
Approximate Set-Up Time:
45 Minutes
Warranty: 1 Year

ATTACHMENT
CODE IDENTIFIER DESCRIPTION

Tubing Size: 3 In. x 3 In.

SUGGESTED LIST PRICE USD (\$)

Select One Code From Each Required Category

BASE MACHINE

1233XF PR1172 - 72 In. Power Rake 10,468.00

ATTACHMENTS - ORDER AS DESIRED

9000 Grass Seed Attachment for PR1172 6,449.00

ATTACHMENTS FOR FIELD CONVERSION

Miscellaneous:

5SPPS60814 Grass Seed Attachment for PR1172 6.964.92

PR1172 - 72 In. Power Rake Continued THIS PAGE IS INTENTIONALLY LEFT BLANK

Landscaping

PR1184 - 84 In. Power Rake

Equipment for Base Machine

Function: Landscaping and Site Development
Hitch Compatibility:
Category I, Category II,
iMatch, Quick Coupler Compatible
Rotor: Cylindrical with
Welded Carbide Teeth
Carbide Teeth per Rotor: 132
Depth Control: Dual Independently
Adjustable Gauge Wheels
Gauge Wheel Description: 16.5 x 6.5-8
Gauge Wheel Height Adjustment:
Manual Split Clamp
Angle Adjustment: Hydraulic
Hydraulic Cylinder Manufacturer:
Best Metal Ind.
Hydraulic Cylinder Description: 2.00 In.
Bore 1.25 In. rod 8.00 In. Stroke
Working Angles R or L: 0-15 Degrees
Height: 44 In.
Transport Width: 93 In.
Working Width: 84 In.
Working Width: 84 In.
Roll-Back Barrier Range:
5/16 In. to 4-11/16 In.
Length: 70 In.
Side Drive: Chain ASA 60-2H
Chain Case Lube:
Cenex 365 #00 Fluid Grease
Tubing Size: 4 In. x 4 In.

Tubing Wall Thickness: 5/16 In.
Tractor PTO Speed (RPM): 540
Driveline Manufacturer: Weasler
Primary Driveline Description: 35E
Secondary Driveline Description: 44E with
Friction Clutch (1-3/4 In. 20 Splines)
Clutch/Torque Setting (Number): 1695
Tractor PTO HP Requirements
Minimum-Maximum: 42-80 HP
Tractor Hydraulic Requirements: 1500 PSI
Gearbox Manufacturer: Superior
Gearbox Description:
Straight Bevel Gear in Oil Bath
Gearbox Oil Recommendation: 85-90W
Gearbox Reduction: 2:1
Rotor Speed (RPM): 270
Rotor Direction of Rotation: Against DOT
Approximate Operating Weight: 1260 lbs.
Approximate Shipping Weight: 1700 lbs.
Parking Stand: Standard
Approximate Set-Up Time:
60 Minutes
Warranty: 1 Year

ATTACHMENT
CODE IDENTIFIER DESCRIPTION

SUGGESTED LIST PRICE USD (\$)

Select One Code From Each Required Category

BASE MACHINE

1234XF PR1184 - 84 In. Power Rake 13,678.00

PR1184 - 84 In. Power Rake Continued

Landscaping

RB2060 - 5 Ft. Standard Duty Rear Blade

Equipment for Base Machine

3-Point Hitch: Category I
Working Width: 60 In.
Operational Weight: 249 lbs.
Tractor HP: 19 to 45 HP
Tilt Positions: Three
Offset: 12 In. Left or Right
Shipping Weight:
588 lbs. for Quantity 2
Pivot: 360 Degrees
Parking Stand: Standard
Packaged 2 Per Crate
Moldboard Height: 14 In.
Moldboard Length: 60 In.
Moldboard Thickness: 3/16 In.

5WS346765

Duty: Standard Duty

Cutting Edge:
1/2 In. x 6 In. Reversible
Assembly/Set-Up Time: 15 Minutes
Angle - Forward:
0, 15 and 30 Degrees Each Side
Angle - Reverse:
0 and 15 Degrees Each Side
Skid Shoes: Optional

164.82

			SUGGESTED
	ATTACHMENT		LIST PRICE
CODE	IDENTIFIER	DESCRIPTION	USD (\$)

Select One Code From Each Required Category

BASE MACHINE

1281XF RB2060 - 5 Ft. Standard Duty Rear Blade 739.00

Order in multiples of two.

ATTACHMENTS FOR FIELD CONVERSION

End Plate Kit (RB2060, RB2072 and RB2084)

Miscellaneous:

5WS101376 French Operator's Manual and Decal Kit (RB20 and RB20L Series) 31.60

5WS346745 Skid Shoes Kit (RB2060, RB2072 and RB2084) 243.75

RB2060 - 5 Ft. Standard Duty Rear Blade
Continued

THIS PAGE IS INTENTIONALLY LEFT BLANK

Landscaping

RB2060L - 5 Ft. Rear Blade - Limited Category I

Equipment for Base Machine

Cutting Edge:

1/2 In. x 6 In. Reversible
Angle Pivot: 360 Degrees
Angle - Forward:

0, 15 and 30 Degrees Each Side
Angle - Reverse:

0, 15 and 30 Degrees Each Side
Moldboard Thickness: 7 Gauge
Moldboard Length: 60 In.
Moldboard Height: 11 In.
Tractor HP (Maximum): 25 HP
3-Point Hitch:
Limited Category I (Aftermarket
Category 0 Lift Pins Available)

Parking Stand - Standard Skid Shoe Bundle: Optional Operating Weight: 155 lbs. Shipping Weight: 402 lbs. (Quantity of 2) Packaged Two Per Crate Assembly/Set-Up Time: 30 Minutes Warranty: 1 Year

ATTACHMENT
CODE IDENTIFIER DESCRIPTION

SUGGESTED LIST PRICE USD (\$)

Select One Code From Each Required Category

BASE MACHINE

1291XF RB2060L - 5 Ft. Rear Blade - Limited Category I 527.00

Order in multiples of two.

ATTACHMENTS FOR FIELD CONVERSION

Miscellaneous:

5WS101376 French Operator's Manual and Decal Kit (RB20 and RB20L Series) 31.60

5WS343435 Skid Shoes Kit (RB2060L) 55.75

RB2060L - 5 Ft. Rear Blade - Limited Category I Continued

Landscaping

RB2072 - 6 Ft. Standard Duty Rear Blade

Equipment for Base Machine

3-Point Hitch: Category I
Shipping Weight:
660 lbs. (Quantity 2)
Moldboard Height: 14 In.
Moldboard Length: 72 In.
Moldboard Thickness: 1/4 In.
Duty: Standard Duty
Cutting Edge:
1/2 In. x 6 In. Reversible
Angle: 360 Degrees
Angle - Reverse:
0 and 15 Degrees Each Side
Approximate Operating Weight: 285 lb.
Offset: 12 In. Left or Right

Tractor HP: 23 to 55 HP
Tilt: 3-Positions
Angle - Forward:
 0, 15, and 30 Degrees Each Side
Skid Shoe Bundle: Optional
End Plate Bundle: Optional
Assembly/Set-Up Time:
 15 Minutes (Approximate)

	ATTACHMENT	
CODE	IDENTIFIER	DESCRIPTION

SUGGESTED LIST PRICE USD (\$)

Select One Code From Each Required Category

BASE MACHINE

1282XF RB2072 - 6 Ft. Standard Duty Rear Blade 820.00

Order in multiples of two.

ATTACHMENTS FOR FIELD CONVERSION

Miscellaneous:

 5WS346765
 End Plate Kit (RB2060, RB2072 and RB2084)
 164.82

 5WS101376
 French Operator's Manual and Decal Kit (RB20 and RB20L Series)
 31.60

 5WS346745
 Skid Shoes Kit (RB2060, RB2072 and RB2084)
 243.75

RB2072 - 6 Ft. Standard Duty Rear Blade
Continued

THIS PAGE IS INTENTIONALLY LEFT BLANK

Landscaping

RB2084 - 7 Ft. Standard Duty Rear Blade

Equipment for Base Machine

3-Point Hitch: Category I
Tractor HP: 27 to 55 HP
Tilt: 3 Position
Shipping Weight:
700 lbs. (Quantity 2)
Offset:
12 Inches, Left or Right
Moldboard Thickness: 1/4 In.
Moldboard Length: 84 In.
Moldboard Height: 14 In.
Duty: Standard Duty
Cutting Edge:
1/2 In. x 6 In. Reversible
Approximate Operating Weight: 305 lbs.
Angle: 360 Degrees

Angle - Reverse:
 0 and 15 Degrees Each Side
Angle - Forward:
 0, 15, and 30 Degrees Each Side
Skid Shoe Bundle: Optional
End Plate Bundle: Optional
Assembly/Set-Up Time:
 15 Minutes (Approximate)

164.82

			SUGGESTED
	ATTACHMENT		LIST PRICE
CODE	IDENTIFIER	DESCRIPTION	USD (\$)

Select One Code From Each Required Category

BASE MACHINE

1283XF RB2084 - 7 Ft. Standard Duty Rear Blade 895.00

Order in multiples of two.

ATTACHMENTS FOR FIELD CONVERSION

End Plate Kit (RB2060, RB2072 and RB2084)

Miscellaneous:

5WS346765

 5WS101376
 French Operator's Manual and Decal Kit (RB20 and RB20L Series)
 31.60

 5WS346745
 Skid Shoes Kit (RB2060, RB2072 and RB2084)
 243.75

RB2084 - 7 Ft. Standard Duty Rear Blade Continued

THIS PAGE IS INTENTIONALLY LEFT BLANK

				_
nα	November	2015	IIS &	Canada

Landscaping

RB2160 - 5 Ft. Medium Duty Rear Blade

Equipment for Base Machine

Hitch: 3-Point Category I and iMatch
Working Width: 60 In.
Working Weight: 392 lbs.
Tractor HP:
65 HP (Maximum - 2WD)
60 HP (Maximum - 4WD)
Tilt: 3 Positions,
Up to 22 degrees Up or Down
Shipping Weight: 426 lbs.
Angle/Pivot: 360 Degrees
Moldboard Height: 17 In.
Moldboard Thickness: 1/4 In.
Duty: Medium Duty
Cutting Edge:
1/2 In. x 6 In. Reversible

Assembly/Set-Up Time: 60 Minutes
Angle - Forward:
 3 Positions, Up to 53 Degrees Each Side
Angle - Reverse:
 3 Positions, Up to 53 Degrees Each Side
Skid Shoes (Pair): Optional
End Plates (Pair): Optional
Parking Stand: Standard
Offset: 6 In. or 12 In. Left or Right

ATTACHMENT
CODE IDENTIFIER DESCRIPTION

SUGGESTED LIST PRICE USD (\$)

Select One Code From Each Required Category

BASE MACHINE

1301XF RB2160 - 5 Ft. Medium Duty Rear Blade 1,179.00

ATTACHMENTS FOR FIELD CONVERSION

Miscellaneous:

5TMC6200001 End Plates - Pair (RB21 Series) 113.49

5TMC6100001 Skid Shoes - Pair (RB21 Series) 125.43

RB2160 - 5 Ft. Medium Duty Rear Blade Continued

THIS PAGE IS INTENTIONALLY LEFT BLANK

Landscaping

RB2172 - 6 Ft. Medium Duty Rear Blade

Equipment for Base Machine

Hitch: 3-Point Category I and iMatch
Working Width: 72 In.
Working Weight: 422 lbs.
Tractor HP:
65 HP (Maximum - 2WD)
60 HP (Maximum - 4WD)
Tilt: 3 Positions,
Up to 22 degrees Up or Down
Shipping Weight: 456 lbs.
Angle/Pivot: 360 Degrees
Moldboard Height: 17 In.
Moldboard Thickness: 1/4 In.
Duty: Medium Duty
Cutting Edge:
1/2 In. x 6 In. Reversible

Assembly/Set-Up Time: 60 Minutes
Angle - Forward:
 3 Positions, Up to 53 Degrees Each Side
Angle - Reverse:
 3 Positions, Up to 53 Degrees Each Side
Skid Shoes (Pair): Optional
End Plates (Pair): Optional
Parking Stand: Standard
Offset: 6 In. or 12 In. Left or Right

ATTACHMENT
CODE IDENTIFIER DESCRIPTION

SUGGESTED LIST PRICE USD (\$)

Select One Code From Each Required Category

BASE MACHINE

1302XF RB2172 - 6 Ft. Medium Duty Rear Blade 1,250.00

ATTACHMENTS FOR FIELD CONVERSION

Miscellaneous:

5TMC6200001 End Plates - Pair (RB21 Series) 113.49

5TMC6100001 Skid Shoes - Pair (RB21 Series) 125.43

RB2172 - 6 Ft. Medium Duty Rear Blade

Continued
THIS PAGE IS INTENTIONALLY LEFT BLANK
THIS FACE IS INTENTIONALLY LEFT BLAIN

Landscaping

RB2184 - 7 Ft. Medium Duty Rear Blade

Equipment for Base Machine

Hitch: 3-Point Category I and iMatch
Working Width: 84 In.
Working Weight: 448 lbs.
Tractor HP:
65 HP (Maximum - 2WD)
60 HP (Maximum - 4WD)
Tilt: 3 Positions,
Up to 22 degrees Up or Down
Shipping Weight: 482 lbs.
Angle/Pivot: 360 Degrees
Moldboard Height: 17 In.
Moldboard Thickness: 1/4 In.
Duty: Medium Duty
Cutting Edge:
1/2 In. x 6 In. Reversible

Assembly/Set-Up Time: 60 Minutes
Angle - Forward:
 3 Positions, Up to 53 Degrees Each Side
Angle - Reverse:
 3 Positions, Up to 53 Degrees Each Side
Skid Shoes (Pair): Optional
End Plates (Pair): Optional
Parking Stand: Standard
Offset - 6 In. or 12 In. Left or Right

ATTACHMENT
CODE IDENTIFIER DESCRIPTION

SUGGESTED LIST PRICE USD (\$)

Select One Code From Each Required Category

BASE MACHINE

1303XF RB2184 - 7 Ft. Medium Duty Rear Blade 1,325.00

ATTACHMENTS FOR FIELD CONVERSION

Miscellaneous:

5TMC6200001 End Plates - Pair (RB21 Series) 113.49

5TMC6100001 Skid Shoes - Pair (RB21 Series) 125.43

RB2184 - 7 Ft. Medium Duty Rear Blade Continued

THIS PAGE IS INTENTIONALLY LEFT BLANK

Landscaping

RB2196 - 8 Ft. Medium Duty Rear Blade

Equipment for Base Machine

Hitch: 3-Point Category I and iMatch
Working Width: 96 In.
Working Weight: 476 lbs.
Tractor HP:
65 HP (Maximum - 2WD)
60 HP (Maximum - 4WD)
Tilt: 3 Positions,
Up to 22 degrees Up or Down
Shipping Weight: 510 lbs.
Angle/Pivot: 360 Degrees
Moldboard Height: 17 In.
Moldboard Thickness: 1/4 In.
Duty: Medium Duty
Cutting Edge:
1/2 In. x 6 In. Reversible

Assembly/Set-Up Time: 60 Minutes
Angle - Forward:
 3 Positions, Up to 53 Degrees Each Side
Angle - Reverse:
 3 Positions, Up to 53 Degrees Each Side
Skid Shoes (Pair): Optional
End Plates (Pair): Optional
Parking Stand: Standard
Offset - 6 In. or 12 In. Left or Right

ATTACHMENT
CODE IDENTIFIER DESCRIPTION

SUGGESTED LIST PRICE USD (\$)

Select One Code From Each Required Category

BASE MACHINE

1304XF RB2196 - 8 Ft. Medium Duty Rear Blade 1,384.00

ATTACHMENTS FOR FIELD CONVERSION

Miscellaneous:

5TMC6200001 End Plates - Pair (RB21 Series) 113.49

5TMC6100001 Skid Shoes - Pair (RB21 Series) 125.43

RB2196 - 8 Ft. Medium Duty Rear Blade Continued

THIS PAGE IS INTENTIONALLY LEFT BLANK

Landscaping

RB2160H - 5 Ft. Medium Duty Hydraulic Rear Blade

Equipment for Base Machine

Hitch: 3-Point Category I
and iMatch
Working Width: 60 in. (1,524 mm)
Working Weight: 379 lbs. (171.9 kg)
Tractor HP:
50 HP (37.3 kW) (Maximum - 2WD)
45 HP (33.6 kW) (Maximum - 4WD)
Tilt: 3 Positions,
Up to 20 degrees Up or Down
Shipping Weight: 459 lbs. (208.2 kg)
Angle/Pivot: 360 Degrees
Moldboard Height: 15 in. (381 mm)
Moldboard Thickness: 1/4 in. 6.35 mm)
Duty: Medium Duty
Cutting Edge:
1/2 x 6 in. Reversible (12.7 x 152.4 mm)

Assembly/Set-Up Time: 60 Minutes
Angle - Forward:
Hydraulic, Up to 40 Degrees Each Side
Angle - Reverse:
Hydraulic, Up to 40 Degrees Each Side
Skid Shoes (Pair): Optional
End Plates (Pair): Optional
Parking Stand: Standard
Offset: 6 in. or 12 in. Left or Right (152.4 mm or 304.8 mm)

			SUGGESTED
	ATTACHMENT		LIST PRICE
CODE	IDENTIFIER	DESCRIPTION	USD (\$)

Select One Code From Each Required Category

1551XF	RB2160H - 5 Ft. Medium Duty Hydraulic Rear Blade Includes one cylinder.	1,432.80
	ATTACHMENTS - ORDER AS DESIRED	
9000	Skid Shoes (Pair)	74.18
9010	End Plates (Pair)	71.09
	ATTACHMENTS FOR FIELD CONVERSION	
5TMKMCN021	Miscellaneous: End Plates (Pair)	79.62
5TMKHCN101	Hydraulic Cylinder Kit Includes one cylinder.	616.02
5TMKMCN022	2 Skid Shoes (Pair)	83.08

RB2160H - 5 Ft. Medium Duty Hydraulic Rear Blade

Continued
THIS PAGE IS INTENTIONALLY LEFT BLANK

Landscaping

RB2172H - 6 Ft. Medium Duty Hydraulic Rear Blade

Equipment for Base Machine


Hitch: 3-Point Category I
and iMatch
Working Width: 72 in. (1,828.8 mm)
Working Weight: 405 lbs. (183.7 kg)
Tractor HP:
50 HP (37.3 kW) (Maximum - 2WD)
45 HP (33.6 kW) (Maximum - 4WD)
Tilt: 3 Positions,
Up to 20 degrees Up or Down
Shipping Weight: 489 lbs. (221.8 kg)
Angle/Pivot: 360 Degrees
Moldboard Height: 15 in. (381 mm)
Moldboard Thickness: 1/4 in. 6.35 mm)
Duty: Medium Duty
Cutting Edge:
1/2 x 6 in. Reversible (12.7 x 152.4 mm)

Assembly/Set-Up Time: 60 Minutes
Angle - Forward:
Hydraulic, Up to 40 Degrees Each Side
Angle - Reverse:
Hydraulic, Up to 40 Degrees Each Side
Skid Shoes (Pair): Optional
End Plates (Pair): Optional
Parking Stand: Standard
Offset: 6 in. or 12 in. Left or Right (152.4 mm or 304.8 mm)

			SUGGESTED
	ATTACHMENT		LIST PRICE
CODE	IDENTIFIER	DESCRIPTION	USD (\$)

Select One Code From Each Required Category

1552XF		RB2172H - 6 Ft. Medium Duty Hydraulic Rear Blade Includes one cylinder.	1,535.79
		ATTACHMENTS - ORDER AS DESIRED	
9000		Skid Shoes (Pair)	74.18
9010		End Plates (Pair)	71.09
		ATTACHMENTS FOR FIELD CONVERSION	
5TMI	KMCN021	Miscellaneous: End Plates (Pair)	79.62
5TMI	KHCN101	Hydraulic Cylinder Kit Includes one cylinder.	616.02
5TMI	KMCN022	Skid Shoes (Pair)	83.08

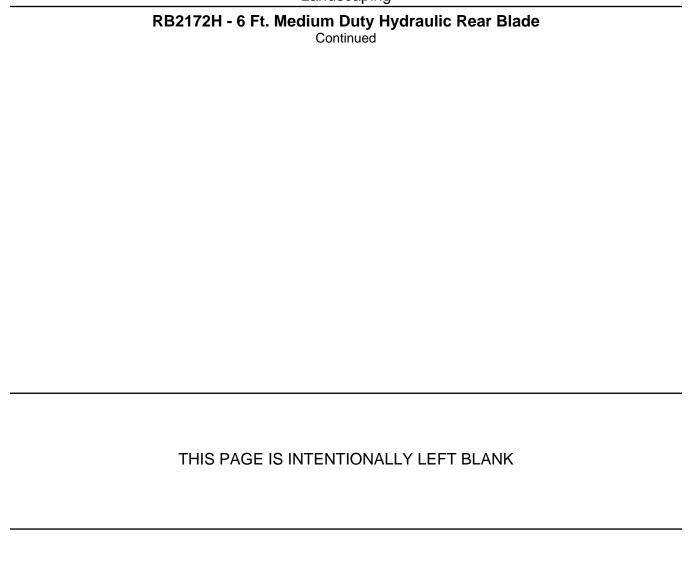

Landscaping

RB2184H - 7 Ft. Medium Duty Hydraulic Rear Blade

Equipment for Base Machine

Hitch: 3-Point Category I
and iMatch
Working Width: 84 in. (2,133.6 mm)
Working Weight: 431 lbs. (195.5 kg)
Tractor HP:
50 HP (37.3 kW) (Maximum - 2WD)
45 HP (33.6 kW) (Maximum - 4WD)
Tilt: 3 Positions,
Up to 20 degrees Up or Down
Shipping Weight: 515 lbs. (233.6 kg)
Angle/Pivot: 360 Degrees
Moldboard Height: 15 in. (381 mm)
Moldboard Thickness: 1/4 in. 6.35 mm)
Duty: Medium Duty
Cutting Edge:
1/2 x 6 in. Reversible (12.7 x 152.4 mm)

Assembly/Set-Up Time: 60 Minutes
Angle - Forward:
Hydraulic, Up to 40 Degrees Each Side
Angle - Reverse:
Hydraulic, Up to 40 Degrees Each Side
Skid Shoes (Pair): Optional
End Plates (Pair): Optional
Parking Stand: Standard
Offset: 6 in. or 12 in. Left or Right (152.4 mm or 304.8 mm)

	ATTACHMENT	
CODE	IDENTIFIER	DESCRIPTION

SUGGESTED LIST PRICE USD (\$)

Select One Code From Each Required Category

1553XF		RB2184H - 7 Ft. Medium Duty Hydraulic Rear Blade Includes one cylinder.	1,602.07
		ATTACHMENTS - ORDER AS DESIRED	
9000		Skid Shoes (Pair)	74.18
9010		End Plates (Pair)	71.09
		ATTACHMENTS FOR FIELD CONVERSION	
5TM	IKMCN021	Miscellaneous: End Plates (Pair)	79.62
5TM	IKHCN101	Hydraulic Cylinder Kit Includes one cylinder.	616.02
5TM	IKMCN022	Skid Shoes (Pair)	83.08

RB2184H - 7 Ft. Medium Duty Hydraulic Rear Blade Continued THIS PAGE IS INTENTIONALLY LEFT BLANK

Landscaping

RB2196H - 8Ft. Medium Duty Hydraulic Rear Blade

Equipment for Base Machine

Hitch: 3-Point Category I
and iMatch
Working Width: 96 in. (2,438.4 mm)
Working Weight: 456 lbs. (206.8 kg)
Tractor HP:
50 HP (37.3 kW) (Maximum - 2WD)
45 HP (33.6 kW) (Maximum - 4WD)
Tilt: 3 Positions,
Up to 20 degrees Up or Down
Shipping Weight: 543 lbs. (246.3 kg)
Angle/Pivot: 360 Degrees
Moldboard Height: 15 in. (381 mm)
Moldboard Thickness: 1/4 in. 6.35 mm)
Duty: Medium Duty
Cutting Edge:
1/2 x 6 in. Reversible (12.7 x 152.4 mm)

Assembly/Set-Up Time: 60 Minutes
Angle - Forward:
Hydraulic, Up to 40 Degrees Each Side
Angle - Reverse:
Hydraulic, Up to 40 Degrees Each Side
Skid Shoes (Pair): Optional
End Plates (Pair): Optional
Parking Stand: Standard
Offset: 6 in. or 12 in. Left or Right (152.4 mm or 304.8 mm)

	ATTACHMENT	
CODE	IDENTIFIER	DESCRIPTION

SUGGESTED LIST PRICE USD (\$)

Select One Code From Each Required Category

1554XF		RB2196H - 8Ft. Medium Duty Hydraulic Rear Blade Includes one cylinder.	1,702.59
		ATTACHMENTS - ORDER AS DESIRED	
9000		Skid Shoes (Pair)	74.18
9010		End Plates (Pair)	71.09
		ATTACHMENTS FOR FIELD CONVERSION	
	5TMKMCN021	Miscellaneous: End Plates (Pair)	79.62
	5TMKHCN101	Hydraulic Cylinder Kit Includes one cylinder.	616.02
	5TMKMCN022	Skid Shoes (Pair)	83.08

RB2196H - 8Ft. Medium Duty Hydraulic Rear Blade Continued

Continued	
	-
THIS PAGE IS INTENTIONALLY LEFT BLANK	
THE TAGE IS INTERNIOUVEEL EET I BEAUT	
	-

Landscaping

RB2272 - 6 Ft. Medium Plus Rear Blade

Equipment for Base Machine

Hitch:

3 Point Category II and
ASAE Category II Quick Coupler
Tractor HP:
80 HP (Maximum - 2WD)
70 HP (Maximum - 4WD)
Shipping Weight: 795 lbs.
Moldboard Height: 19 In.
Duty: Medium Plus Duty
Assembly/Set-Up Time: 120 Minutes
Cutting Edge:
1/2 In. x 6 In. Reversible
Angle/Pivot: 360 Degrees
Moldboard Thickness: 1/4 In.
Moldboard Length: 72 In.
Approximate Operating Weight: 738 lb.
Offset: 9 In. or 18 In. Left or Right

Tilt: 3 Positions,
 Up to 23 Degrees, Up or Down
Angle-Forward:
 3 Positions, Up to 45 Degrees Each Side
Angle-Reverse:
 3 Positions, Up to 45 Degrees Each Side
Skid Shoes (Pair): Optional
End Plates (Pair): Optional
Hydraulic Offset Kit:
 Optional (Hoses and Fittings Included)
Parking Stand: Standard

ATTACHMENT
CODE IDENTIFIER DESCRIPTION

5TMC6100002

SUGGESTED LIST PRICE USD (\$)

131.04

Select One Code From Each Required Category

BASE MACHINE

1311XF RB2272 - 6 Ft. Medium Plus Rear Blade 2,116.00

ATTACHMENTS FOR FIELD CONVERSION

Miscellaneous:

Skid Shoes - Pair

 5TMC6200003
 End Plates - Pair
 140.00

 5TMC6300073
 Hydraulic Cylinder Kit
 528.14

RB2272 - 6 Ft. Medium Plus Rear Blade Continued

THIS PAGE IS INTENTIONALLY LEFT BLANK

Landscaping

RB2284 - 7 Ft. Medium Plus Rear Blade

Equipment for Base Machine

Hitch:

3 Point Category II and
ASAE Category II Quick Coupler
Tractor HP:

80 HP (Maximum - 2WD)
70 HP (Maximum - 4WD)
Shipping Weight: 812 lbs.
Moldboard Height: 19 In.
Duty: Medium Plus Duty
Assembly/Set-Up Time: 120 Minutes
Cutting Edge:
1/2 In. x 6 In. Reversible
Angle/Pivot: 360 Degrees
Moldboard Thickness: 1/4 In.
Moldboard Length: 84 In.
Approximate Operating Weight: 755 lbs.
Offset: 9 In. or 18 In. Left or Right

Tilt: 3 Positions,
 Up to 23 Degrees, Up or Down
Angle-Forward:
 3 Positions, Up to 45 Degrees Each Side
Angle-Reverse:
 3 Positions, Up to 45 Degrees Each Side
Skid Shoes (Pair): Optional
End Plates (Pair): Optional
Hydraulic Offset Kit:
 Optional (Hoses and Fittings Included)
Parking Stand: Standard

ATTACHMENT
CODE IDENTIFIER DESCRIPTION

5TMC6100002

SUGGESTED LIST PRICE USD (\$)

131.04

Select One Code From Each Required Category

BASE MACHINE

1312XF RB2284 - 7 Ft. Medium Plus Rear Blade 2,289.00

ATTACHMENTS FOR FIELD CONVERSION

Miscellaneous:

Skid Shoes - Pair

 5TMC6200003
 End Plates - Pair
 140.00

 5TMC6300073
 Hydraulic Cylinder Kit
 528.14

RB2284 - 7 Ft. Medium Plus Rear Blade Continued

THIS PAGE IS INTENTIONALLY LEFT BLANK

Landscaping

RB2296 - 8 Ft. Medium Plus Rear Blade

Equipment for Base Machine

Hitch:
3 Point Category II and
ASAE Category II Quick Coupler
Tractor HP:
80 HP (Maximum - 2WD)
70 HP (Maximum - 4WD)
Shipping Weight: 829 lbs.
Moldboard Height: 19 In.
Duty: Medium Plus Duty
Assembly/Set-Up Time: 120 Minutes
Cutting Edge:
1/2 In. x 6 In. Reversible
Angle/Pivot: 360 Degrees
Moldboard Thickness: 1/4 In.
Moldboard Length: 96 In.
Approximate Operating Weight: 772 lbs.
Offset: 9 In. or 18 In. Left or Right

Tilt: 3 Positions,
 Up to 23 Degrees, Up or Down
Angle-Forward:
 3 Positions, Up to 45 Degrees Each Side
Angle-Reverse:
 3 Positions, Up to 45 Degrees Each Side
Skid Shoes (Pair): Optional
End Plates (Pair): Optional
Hydraulic Offset Kit:
 Optional (Hoses and Fittings Included)
Parking Stand: Standard

ATTACHMENT
CODE IDENTIFIER DESCRIPTION

5TMC6100002

SUGGESTED LIST PRICE USD (\$)

131.04

Select One Code From Each Required Category

BASE MACHINE

1313XF RB2296 - 8 Ft. Medium Plus Rear Blade 2,394.00

ATTACHMENTS FOR FIELD CONVERSION

Miscellaneous:

Skid Shoes - Pair

 5TMC6200003
 End Plates - Pair
 140.00

 5TMC6300073
 Hydraulic Cylinder Kit
 528.14

RB2296 - 8 Ft. Medium Plus Rear Blade Continued

THIS PAGE IS INTENTIONALLY LEFT BLANK

Landscaping

RB2307 - 7 Ft. Heavy Duty Rear Blade

Equipment for Base Machine

Hitch:

3-Point Category II and

ASAE Category II Quick Coupler

Tractor HP:

120 HP (Maximum - 2WD)

110 HP (Maximum - 4WD)

Tilt: 3 Positions,
 Up to 23 Degrees Up or Down

Shipping Weight: 1117 lbs.

Offset: 9 In. or 18 In. Left or Right
Moldboard Thickness: 5/16 In.

Moldboard Length: 84 In.

Moldboard Height: 19 In.

Duty: Heavy Duty

Cutting Edge:

1/2 In. x 6 In. Reversible

Approximate Operating Weight: 1060 lbs.

Assembly/Set-Up Time:

120 Minutes (Approximate)
Angle: 360 Degrees
Angle - Forward:
3 Positions, Up to 45 Degrees Each Side
Angle - Reverse:
3 Positions, Up to 45 Degrees Each Side
Skid Shoes (Pair): Optional
End Plates (Pair): Optional
Parking Stand: Standard
Hydraulic Tilt, Angle and Offset Kits:
Optional (Hoses and Fittings Included)

			SUGGESTED
	ATTACHMENT		LIST PRICE
CODE	IDENTIFIER	DESCRIPTION	USD (\$)

Select One Code From Each Required Category

1321XF		RB2307 - 7 Ft. Heavy Duty Rear Blade	2,601.00
		OPERATION	
1000		Manual Kit	In Base Price
1010		Hydraulic Cylinder Kit, Angle - Offset - Tilt Includes 3 cylinders.	1,385.00
		ATTACHMENTS - ORDER AS DESIRED	
9000		Skid Shoes (Pair)	117.00
9010		End Plates (Pair)	125.00
9020		Hydraulic Diverter Kit	440.00
		ATTACHMENTS FOR FIELD CONVERSION	
	5TMC6200003	Miscellaneous: End Plates - Pair	140.00
	5TMC0040025K	French Operator's Manual and Decal Kit Rear Blades RB2307, RB2308, RB2309 and RB2310.	6.82
	5TMC6300073	Hydraulic Cylinder Kit Offset or Tilt - Includes 1 Cylinder (RB23 Series).	528.14
	5TMC6300083	Hydraulic Cylinder Kit - Angle - Includes 1 Cylinder (RB23 Series)	541.08
	5TMC6300051	Hydraulic Diverter Kit (RB23 Series)	475.20

Landscaping

RB2307 - 7 Ft. Heavy Duty Rear Blade Continued

CODE	ATTACHMENT IDENTIFIER	DESCRIPTION	SUGGESTED LIST PRICE USD (\$)
	5TMC6100002	ATTACHMENTS FOR FIELD CONVERSIONContinued Skid Shoes - Pair	131.04

Landscaping

RB2308 - 8 Ft. Heavy Duty Rear Blade

Equipment for Base Machine

Hitch:

3-Point Category II and

ASAE Category II Quick Coupler

Tractor HP:

120 HP (Maximum - 2WD)

110 HP (Maximum - 4WD)

Tilt: 3 Positions,
 Up to 23 Degrees Up or Down

Shipping Weight: 1196 lbs.

Offset: 9 In. or 18 In. Left or Right

Moldboard Thickness: 5/16 In.

Moldboard Length: 96 In.

Moldboard Height: 19 In.

Duty: Heavy Duty

Cutting Edge:

1/2 In. x 6 In. Reversible

Approximate Operating Weight: 1139 lbs.

Assembly/Set-Up Time:

120 Minutes (Approximate)
Angle: 360 Degrees
Angle - Forward:
 3 Positions, Up to 45 Degrees Each Side
Angle - Reverse:
 3 Positions, Up to 45 Degrees Each Side
Skid Shoes (Pair): Optional
End Plates (Pair): Optional
Parking Stand: Standard
Hydraulic Tilt, Angle and Offset Kits:
 Optional (Hoses and Fittings Included)

			SUGGESTED
	ATTACHMENT		LIST PRICE
CODE	IDENTIFIER	DESCRIPTION	USD (\$)

Select One Code From Each Required Category

		BASE MACHINE	
1322XF		RB2308 - 8 Ft. Heavy Duty Rear Blade	2,830.00
		OPERATION	
1000		Manual Kit	In Base Price
1010		Hydraulic Cylinder Kit, Angle - Offset - Tilt <i>Includes 3 cylinders</i> .	1,385.00
		ATTACHMENTS - ORDER AS DESIRED	
9000		Skid Shoes (Pair)	117.00
9010		End Plates (Pair)	125.00
9020		Hydraulic Diverter Kit	440.00
		ATTACHMENTS FOR FIELD CONVERSION	
	5TMC6200003	Miscellaneous: End Plates - Pair	140.00
	5TMC0040025K	French Operator's Manual and Decal Kit Rear Blades RB2307, RB2308, RB2309 and RB2310.	6.82
	5TMC6300073	Hydraulic Cylinder Kit Offset or Tilt - Includes 1 Cylinder (RB23 Series).	528.14
	5TMC6300083	Hydraulic Cylinder Kit - Angle - Includes 1 Cylinder (RB23 Series)	541.08
	5TMC6300051	Hydraulic Diverter Kit (RB23 Series)	475.20

Landscaping

RB2308 - 8 Ft. Heavy Duty Rear Blade Continued

CODE	ATTACHMENT IDENTIFIER	DESCRIPTION	SUGGESTED LIST PRICE USD (\$)
	5TMC6100002	ATTACHMENTS FOR FIELD CONVERSIONContinued Skid Shoes - Pair	131.04

Landscaping

RB2309 - 9 Ft. Heavy Duty Rear Blade

Equipment for Base Machine

Hitch:

3-Point Category II and
ASAE Category II Quick Coupler
Tractor HP:

120 HP (Maximum - 2WD)
110 HP (Maximum - 4WD)

Tilt: 3 Positions,
Up to 23 Degrees Up or Down
Shipping Weight: 1297 lbs.
Offset: 9 In. or 18 In. Left or Right
Moldboard Thickness: 5/16 In.
Moldboard Length: 108 In.
Moldboard Height: 19 In.
Duty: Heavy Duty
Cutting Edge:
1/2 In. x 6 In. Reversible
Approximate Operating Weight: 1240 lbs.
Assembly/Set-Up Time:

120 Minutes (Approximate)
Angle: 360 Degrees
Angle - Forward:
 3 Positions, Up to 45 Degrees Each Side
Angle - Reverse:
 3 Positions, Up to 45 Degrees Each Side
Skid Shoes (Pair): Optional
End Plates (Pair): Optional
Parking Stand: Standard
Hydraulic Tilt, Angle and Offset Kits:
 Optional (Hoses and Fittings Included)

			SUGGESTED
	ATTACHMENT		LIST PRICE
CODE	IDENTIFIER	DESCRIPTION	USD (\$)

Select One Code From Each Required Category

		BASE MACHINE	
1323XF		RB2309 - 9 Ft. Heavy Duty Rear Blade	2,964.00
		OPERATION	
1000		Manual Kit	In Base Price
1010		Hydraulic Cylinder Kit, Angle - Offset - Tilt <i>Includes 3 cylinders</i> .	1,385.00
		ATTACHMENTS - ORDER AS DESIRED	
9000		Skid Shoes (Pair)	117.00
9010		End Plates (Pair)	125.00
9020		Hydraulic Diverter Kit	440.00
		ATTACHMENTS FOR FIELD CONVERSION	
	5TMC6200003	Miscellaneous: End Plates - Pair	140.00
	5TMC0040025K	French Operator's Manual and Decal Kit Rear Blades RB2307, RB2308, RB2309 and RB2310.	6.82
	5TMC6300073	Hydraulic Cylinder Kit Offset or Tilt - Includes 1 Cylinder (RB23 Series).	528.14
	5TMC6300083	Hydraulic Cylinder Kit - Angle - Includes 1 Cylinder (RB23 Series)	541.08
	5TMC6300051	Hydraulic Diverter Kit (RB23 Series)	475.20

Landscaping

RB2309 - 9 Ft. Heavy Duty Rear Blade Continued

CODE	ATTACHMENT IDENTIFIER	DESCRIPTION	SUGGESTED LIST PRICE USD (\$)
		ATTACHMENTS FOR FIELD CONVERSIONContinued	131.04

Landscaping

RB2310 - 10 Ft. Heavy Duty Rear Blade

Equipment for Base Machine

Hitch:

3-Point Category II and

ASAE Category II Quick Coupler

Tractor HP:

120 HP (Maximum - 2WD)

110 HP (Maximum - 4WD)

Tilt: 3 Positions,
 Up to 23 Degrees Up or Down

Shipping Weight: 1357 lbs.

Offset: 9 In. or 18 In. Left or Right

Moldboard Thickness: 5/16 In.

Moldboard Length: 120 In.

Moldboard Height: 19 In.

Duty: Heavy Duty

Cutting Edge:

1/2 In. x 6 In. Reversible

Approximate Operating Weight: 1300 lbs.

Assembly/Set-Up Time:

120 Minutes (Approximate)
Angle: 360 Degrees
Angle - Forward:
 3 Positions, Up to 45 Degrees Each Side
Angle - Reverse:
 3 Positions, Up to 45 Degrees Each Side
Skid Shoes (Pair): Optional
End Plates (Pair): Optional
Parking Stand: Standard
Hydraulic Tilt, Angle and Offset Kits:
 Optional (Hoses and Fittings Included)

			SUGGESTED
	ATTACHMENT		LIST PRICE
CODE	IDENTIFIER	DESCRIPTION	USD (\$)

Select One Code From Each Required Category

		BAGE MAGIME	
1324XF		RB2310 - 10 Ft. Heavy Duty Rear Blade	3,050.00
		OPERATION	
1000		Manual Kit	In Base Price
1010		Hydraulic Cylinder Kit, Angle - Offset - Tilt <i>Includes 3 cylinders</i> .	1,385.00
		ATTACHMENTS - ORDER AS DESIRED	
9000		Skid Shoes (Pair)	117.00
9010		End Plates (Pair)	125.00
9020		Hydraulic Diverter Kit	440.00
		ATTACHMENTS FOR FIELD CONVERSION	
	5TMC6200003	Miscellaneous: End Plates - Pair	140.00
	5TMC0040025K	French Operator's Manual and Decal Kit Rear Blades RB2307, RB2308, RB2309 and RB2310.	6.82
	5TMC6300073	Hydraulic Cylinder Kit Offset or Tilt - Includes 1 Cylinder (RB23 Series).	528.14
	5TMC6300083	Hydraulic Cylinder Kit - Angle - Includes 1 Cylinder (RB23 Series)	541.08
	5TMC6300051	Hydraulic Diverter Kit (RB23 Series)	475.20

Landscaping

RB2310 - 10 Ft. Heavy Duty Rear Blade Continued

CODE	ATTACHMENT IDENTIFIER	DESCRIPTION	SUGGESTED LIST PRICE USD (\$)
	5TMC6100002	ATTACHMENTS FOR FIELD CONVERSIONContinued Skid Shoes - Pair	131.04

Landscaping

RB2408 - 8 Ft. Heavy Plus Rear Blade

Equipment for Base Machine

Hitch:

3-Point Category II, III and
ASAE Quick Coupler Category II, III
Tractor HP:

160 HP (Maximum - 2WD)
145 HP (Maximum - 4WD)
Tilt: 2 Positions,
Up to 15 Degrees, Up or Down
Shipping Weight: 1554 lbs.
Offset:

0 In. to 28 In. Right,
0 In. to 26 In. Left
Moldboard Thickness: 5/16 In.
Moldboard Length: 96 In.
Moldboard Height: 19 In.
Duty: Heavy Plus Duty
Cutting Edge:
1/2 In. x 6 In. Reversible
Assembly/Set-Up Time:
180 Minutes (Approximate)

Approximate Operating Weight: 1451 lbs.
Angle: 360 Degrees
Angle Forward:
 4 Positions, Up to 26 Degrees Right
 5 Positions, Up to 38 Degrees Left
Angle Reverse:
 4 Positions, Up to 26 Degrees Right
 5 Positions, Up to 38 Degrees Right
 5 Positions, Up to 38 Degrees Left
Parking Stand: Standard
Skid Shoe Bundle: Optional
End Plate Bundle: Optional
Tailwheel: Optional
Hydraulic Tilt and Offset Kits:
 Optional (Hoses and Fittings Included)

	ATTACHMENT	
CODE	IDENTIFIER	DESCRIPTION

SUGGESTED LIST PRICE USD (\$)

Select One Code From Each Required Category

		BASE MACHINE	
1331XF		RB2408 - 8 Ft. Heavy Plus Rear Blade	4,596.00
		OPERATION	
1000		Manual Kit Includes quantity 1 hydraulic angle cylinder, mechanical offset link, mechanical tilt link.	In Base Price
1010		Hydraulic Cylinder Kit, Angle - Offset - Tilt <i>Includes 3 cylinders</i> .	939.00
		ATTACHMENTS - ORDER AS DESIRED	
9000		Skid Shoes (Pair)	39.00
9010		End Plates (Pair)	134.00
9020		Hydraulic Diverter Kit	417.00
9030		Hydraulic Relief Kit	678.00
9040		Hydraulic Tailwheel Kit, Single Gauge Wheel	1,122.00
9050		Hydraulic Tailwheel Kit, Dual Gauge Wheel	1,441.00
		ATTACHMENTS FOR FIELD CONVERSION	
	5TMC6200004	Miscellaneous: End Plates - Pair (RB24 Series)	150.08

Landscaping

RB2408 - 8 Ft. Heavy Plus Rear Blade Continued

CODE	ATTACHMENT IDENTIFIER	DESCRIPTION	SUGGESTED LIST PRICE USD (\$)
	5TMC6300053	ATTACHMENTS FOR FIELD CONVERSIONContinued Hydraulic Cylinder Kit - Offset or Angle - Includes 1 Cylinder (RB24 Series)	582.03
	5TMC6300063	Hydraulic Cylinder Kit - Tilt - Includes 1 Cylinder (RB24 Series)	416.05
	5TMC6600051	Hydraulic Diverter Kit (RB24 Series)	450.36
	5TMC6600061	Hydraulic Relief Kit (RB24 Series)	732.24
	5TMC6100003	Skid Shoes - Pair (RB24 Series)	43.68
	5TMC6600002	TailWheel Kit - Dual Gauge Wheel - Hydraulic (RB24 Series)	1,556.28
	5TMC6600001	TailWheel Kit - Single Gauge Wheel - Hydraulic (RB24 Series)	1,211.76

Landscaping

RB2409 - 9 Ft. Heavy Plus Rear Blade

Equipment for Base Machine

Hitch:

3-Point Category II, III and
ASAE Quick Coupler Category II, III
Tractor HP:

160 HP (Maximum - 2WD)
145 HP (Maximum - 4WD)
Tilt: 2 Positions,
Up to 15 Degrees, Up or Down
Shipping Weight: 1604 lbs.
Offset:

0 In. to 28 In. Right
0 In. to 26 In. Left
Moldboard Thickness: 5/16 In.
Moldboard Length: 108 In.
Moldboard Height: 19 In.
Duty: Heavy Plus Duty
Cutting Edge:
1/2 In. x 6 In. Reversible
Assembly/Set-Up Time:
180 Minutes (Approximate)

	ATTACHMENT	
CODE	IDENTIFIER	DESCRIPTION

SUGGESTED LIST PRICE USD (\$)

Select One Code From Each Required Category

BASE MACHINE

		BASE MACHINE	
1332XF		RB2409 - 9 Ft. Heavy Plus Rear Blade	4,689.00
		OPERATION	
1000		Manual Kit Includes quantity 1 hydraulic angle cylinder, mechanical offset link, mechanical tilt link.	In Base Price
1010		Hydraulic Cylinder Kit, Angle - Offset - Tilt <i>Includes 3 cylinders</i> .	939.00
		ATTACHMENTS - ORDER AS DESIRED	
9000		Skid Shoes (Pair)	39.00
9010		End Plates (Pair)	134.00
9020		Hydraulic Diverter Kit	417.00
9030		Hydraulic Relief Kit	678.00
9040		Hydraulic Tailwheel Kit, Single Gauge Wheel	1,122.00
9050		Hydraulic Tailwheel Kit, Dual Gauge Wheel	1,441.00
		ATTACHMENTS FOR FIELD CONVERSION	
	5TMC6200004	Miscellaneous: End Plates - Pair (RB24 Series)	150.08

Landscaping

RB2409 - 9 Ft. Heavy Plus Rear Blade Continued

CODE	ATTACHMENT IDENTIFIER	DESCRIPTION	SUGGESTED LIST PRICE USD (\$)
	5TMC6300053	ATTACHMENTS FOR FIELD CONVERSIONContinued Hydraulic Cylinder Kit - Offset or Angle - Includes 1 Cylinder (RB24 Series)	582.03
	5TMC6300063	Hydraulic Cylinder Kit - Tilt - Includes 1 Cylinder (RB24 Series)	416.05
	5TMC6600051	Hydraulic Diverter Kit (RB24 Series)	450.36
	5TMC6600061	Hydraulic Relief Kit (RB24 Series)	732.24
	5TMC6100003	Skid Shoes - Pair (RB24 Series)	43.68
	5TMC6600002	TailWheel Kit - Dual Gauge Wheel - Hydraulic (RB24 Series)	1,556.28
	5TMC6600001	TailWheel Kit - Single Gauge Wheel - Hydraulic (RB24 Series)	1,211.76

Landscaping

RB2410 - 10 Ft. Heavy Plus Rear Blade

Equipment for Base Machine

Hitch:

3-Point Category II, III and
ASAE Quick Coupler Category II, III
Tractor HP:

160 HP (Maximum - 2WD)
145 HP (Maximum - 4WD)
Tilt: 2 Positions,
Up to 15 Degrees, Up or Down
Shipping Weight: 1653 lbs.
Offset:

0 In. to 28 In. Right
0 In. to 26 In. Left
Moldboard Thickness: 5/16 In.
Moldboard Length: 120 In.
Moldboard Height: 19 In.
Duty: Heavy Plus Duty
Cutting Edge:
1/2 In. x 6 In. Reversible
Assembly/Set-Up Time:
180 Minutes (Approximate)

	ATTACHMENT	
CODE	IDENTIFIER	DESCRIPTION

SUGGESTED LIST PRICE USD (\$)

Select One Code From Each Required Category

BASE MACHINE

		BASE MACHINE	
1333XF		RB2410 - 10 Ft. Heavy Plus Rear Blade	4,791.00
		OPERATION	
1000		Manual Kit Includes quantity 1 hydraulic angle cylinder, mechanical offset link, mechanical tilt link.	In Base Price
1010		Hydraulic Cylinder Kit, Angle - Offset - Tilt <i>Includes 3 cylinders</i> .	939.00
		ATTACHMENTS - ORDER AS DESIRED	
9000		Skid Shoes (Pair)	39.00
9010		End Plates (Pair)	134.00
9020		Hydraulic Diverter Kit	417.00
9030		Hydraulic Relief Kit	678.00
9040		Hydraulic Tailwheel Kit, Single Gauge Wheel	1,122.00
9050		Hydraulic Tailwheel Kit, Dual Gauge Wheel	1,441.00
		ATTACHMENTS FOR FIELD CONVERSION	
	5TMC6200004	Miscellaneous: End Plates - Pair (RB24 Series)	150.08

Landscaping

RB2410 - 10 Ft. Heavy Plus Rear Blade Continued

CODE	ATTACHMENT IDENTIFIER	DESCRIPTION	SUGGESTED LIST PRICE USD (\$)
	5TMC6300053	ATTACHMENTS FOR FIELD CONVERSIONContinued Hydraulic Cylinder Kit - Offset or Angle - Includes 1 Cylinder (RB24 Series)	582.03
	5TMC6300063	Hydraulic Cylinder Kit - Tilt - Includes 1 Cylinder (RB24 Series)	416.05
	5TMC6600051	Hydraulic Diverter Kit (RB24 Series)	450.36
	5TMC6600061	Hydraulic Relief Kit (RB24 Series)	732.24
	5TMC6100003	Skid Shoes - Pair (RB24 Series)	43.68
	5TMC6600002	TailWheel Kit - Dual Gauge Wheel - Hydraulic (RB24 Series)	1,556.28
	5TMC6600001	TailWheel Kit - Single Gauge Wheel - Hydraulic (RB24 Series)	1,211.76

Landscaping

RB5060 - 5 Ft. Standard Duty Rear Blade

Equipment for Base Machine

3-Point Hitch:
Category I
Working Width: 60 In.
Operational Weight: 308 lbs.
Tractor HP: 20 to 56 HP
Tilt Positions: Seven
Offset: 12 In. Left or Right
Shipping Weight:
674 lbs. for Quantity 2
Pivot: 360 Degrees
Parking Stand: Standard
Packaged 2 Per Crate
Moldboard Height: 14.5 In.
Moldboard Length: 60 In.
Moldboard Thickness: 1/4 In.

Duty: Standard Duty
Cutting Edge:
 3/8 In. x 6 In. Reversible
Assembly/Set-Up Time: 15 Minutes
Angle - Forward:
 0, 15 and 30 Degrees Each Side
Angle - Reverse:
 0, 15 and 30 Degrees Each Side
Skid Shoes: NA

ATTACHMENT
CODE IDENTIFIER DESCRIPTION


SUGGESTED LIST PRICE USD (\$)

Select One Code From Each Required Category

BASE MACHINE

1651XF

RB5060 - 5 Ft. Standard Duty Rear Blade Order in multiples of two.

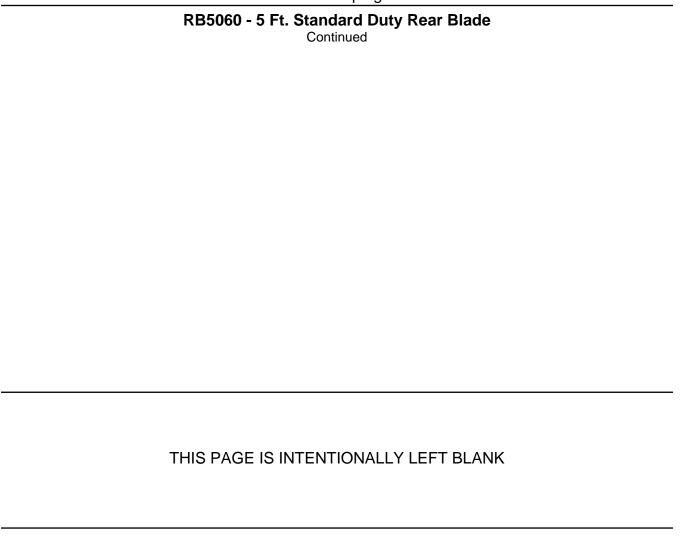

Landscaping

RB5072 - 6 Ft. Standard Duty Rear Blade

Equipment for Base Machine

3-Point Hitch:
Category I
Working Width: 72 In.
Operational Weight: 332 lbs.
Tractor HP: 20 to 56 HP
Tilt Positions: Seven
Offset: 12 In. Left or Right
Shipping Weight:
722 lbs. for Quantity 2
Pivot: 360 Degrees
Parking Stand: Standard
Packaged 2 Per Crate
Moldboard Height: 14.5 In.
Moldboard Length: 72 In.
Moldboard Thickness: 1/4 In.

Duty: Standard Duty
Cutting Edge:
 3/8 In. x 6 In. Reversible
Assembly/Set-Up Time: 15 Minutes
Angle - Forward:
 0, 15 and 30 Degrees Each Side
Angle - Reverse:
 0, 15 and 30 Degrees Each Side
Skid Shoes: NA

ATTACHMENT
CODE IDENTIFIER DESCRIPTION

SUGGESTED LIST PRICE USD (\$)

Select One Code From Each Required Category

BASE MACHINE

1652XF

RB5072 - 6 Ft. Standard Duty Rear Blade *Order in multiples of two*.

RB5072 - 6 Ft. Standard Duty Rear Blade Continued THIS PAGE IS INTENTIONALLY LEFT BLANK

Landscaping

RB5084 - 7 Ft. Standard Duty Rear Blade

Equipment for Base Machine

3-Point Hitch:
Category I
Working Width: 84 In.
Operational Weight: 348 lbs.
Tractor HP: 20 to 56 HP
Tilt Positions: Seven
Offset: 12 In. Left or Right
Shipping Weight:
754 lbs. for Quantity 2
Pivot: 360 Degrees
Parking Stand: Standard
Packaged 2 Per Crate
Moldboard Height: 14.5 In.
Moldboard Length: 84 In.
Moldboard Thickness: 1/4 In.

Duty: Standard Duty
Cutting Edge:
 3/8 In. x 6 In. Reversible
Assembly/Set-Up Time: 15 Minutes
Angle - Forward:
 0, 15 and 30 Degrees Each Side
Angle - Reverse:
 0, 15 and 30 Degrees Each Side
Skid Shoes: NA

ATTACHMENT
CODE IDENTIFIER DESCRIPTION

SUGGESTED LIST PRICE USD (\$)

Select One Code From Each Required Category

BASE MACHINE

1653XF

RB5084 - 7 Ft. Standard Duty Rear Blade Order in multiples of two.

RB5084 - 7 Ft. Standard Duty Rear Blade Continued

THIS PAGE IS INTENTIONALLY LEFT BLANK

Landscaping

RB5096 - 8 Ft. Standard Duty Rear Blade

Equipment for Base Machine

3-Point Hitch:
 Category I
Working Width: 96 In.
Operational Weight: 380 lbs.
Tractor HP: 20 to 56 HP
Tilt Positions: Seven
Offset: 12 In. Left or Right
Shipping Weight:
 818 lbs. for Quantity 2
Pivot: 360 Degrees
Parking Stand: Standard
Packaged 2 Per Crate
Moldboard Height: 14.5 In.
Moldboard Thickness: 1/4 In.

Duty: Standard Duty
Cutting Edge:
 3/8 In. x 6 In. Reversible
Assembly/Set-Up Time: 15 Minutes
Angle - Forward:
 0, 15 and 30 Degrees Each Side
Angle - Reverse:
 0, 15 and 30 Degrees Each Side
Skid Shoes: NA

ATTACHMENT
CODE IDENTIFIER DESCRIPTION

SUGGESTED LIST PRICE USD (\$)

Select One Code From Each Required Category

BASE MACHINE

1654XF

RB5096 - 8 Ft. Standard Duty Rear Blade *Order in multiples of two*.

RB	35096 - 8 Ft. Standard Duty Ro Continued	ear Blade
THIS	S PAGE IS INTENTIONALLY LI	EFT BLANK

Landscaping

RB5048L - 4 Ft. Limited Category 1 Economy Duty Rear Blade

Equipment for Base Machine

3-Point Hitch:
Category I
Working Width: 48 In.
Operational Weight: 186 lbs.
Tractor HP: 18 PTO HP Max
Tilt Positions: None
Offset: None
Shipping Weight:
430 lbs. for Quantity 2
Pivot: 360 Degrees
Parking Stand: Standard
Packaged 2 Per Crate
Moldboard Height: 14.5 In.
Moldboard Length: 48 In.
Moldboard Thickness: 1/4 In.
Duty: Economy Duty

Cutting Edge:

3/8 In. x 6 In. Reversible
Assembly/Set-Up Time: 15 Minutes
(Approximate) - Per Pair
Angle - Forward:

0, 15 and 30 Degrees Each Side
Angle - Reverse:

0, 15 and 30 Degrees Each Side
Skid Shoes: NA

ATTACHMENT
CODE IDENTIFIER DESCRIPTION

SUGGESTED LIST PRICE USD (\$)

Select One Code From Each Required Category

BASE MACHINE

1751XF

RB5048L - 4 Ft. Limited Category 1 Economy Duty Rear Blade Order in multiples of two.

RB5048L - 4 Ft. Limited Category 1 Economy Duty Rear Blade Continued THIS PAGE IS INTENTIONALLY LEFT BLANK

Landscaping

RB5060L - 5 Ft. Limited Category 1 Economy Duty Rear Blade

Equipment for Base Machine

3-Point Hitch:
 Category I
Working Width: 60 In.
Operational Weight: 205 lbs.
Tractor HP: 18 PTO HP Max
Tilt Positions: None
Offset: None
Shipping Weight:
 468 lbs. for Quantity 2
Pivot: 360 Degrees
Parking Stand: Standard
Packaged 2 Per Crate
Moldboard Height: 14.5 In.
Moldboard Length: 60 In.
Moldboard Thickness: 1/4 In.
Duty: Economy Duty

Cutting Edge:
 3/8 In. x 6 In. Reversible
Assembly/Set-Up Time: 15 Minutes
 (Approximate) - Per Pair
Angle - Forward:
 0, 15 and 30 Degrees Each Side
Angle - Reverse:
 0, 15 and 30 Degrees Each Side
Skid Shoes: NA

ATTACHMENT
CODE IDENTIFIER DESCRIPTION

SUGGESTED LIST PRICE USD (\$)

Select One Code From Each Required Category

BASE MACHINE

1752XF

RB5060L - 5 Ft. Limited Category 1 Economy Duty Rear Blade Order in multiples of two.

RB5060L - 5 Ft. Limited Category 1 Economy Duty Rear Blade Continued THIS PAGE IS INTENTIONALLY LEFT BLANK

Landscaping

SW2160 - 60 In. Hydraulic, 300 Series Carrier Loader Mount Rotary Broom with Hydraulic Angle Adjustment and HP2025 Hydraulic Power Unit - U.S.

Equipment for Base Machine

Function: Sweeping

Working Width: 60 In. (1,524 mm)

Working Width at Max Angle: 55 In. (1,397 mm) Transport Width: 72 In. (1,828.8 mm)

Operating Weight: 860 lb. (390 kg.)

Standard Bristle Material: Poly, 50/50 Steel/Poly

Available as Replacement Brush Speed: 160 RPM

Brush Diameter: 32 In. (812.8 mm) Angle Range: 23 degrees left or right

Hood Thickness: 14 gauge

Side Frame Thickness: 3/16 In. (4.8 mm)

Parking Stands Included

Approximate Set-Up Time: 30 Minutes

Function: Hydraulic Power Unit

Pressure: 2700 psi Flow: 16 gpm

1000

9010

Reservoir Capacity: 15 gal.

System Capacity: 17 gal.

System Features: Pressure relieve valve, filter,

temperature

and oil level gauge, and thermal protection switch

Hoses, Tips, and Brackets included Tractor RPM: 540 RPM

PTO Manufacturer: Comer Parking Stand: Standard Hitch Category: Category Quick Hitch Compatibility:

iMatch Compatible

Approximate Set-Up Time: 120 Minutes

	ATTACHMENT	
CODE	IDENTIFIER	DESCRIPTION

SUGGESTED LIST PRICE USD (\$)

In Base Price

Select One Code From Each Required Category

BASE MACHINE

1591XF	SW2160 - 60 In. Hydraulic, 300 Series Carrier Loader Mount Rotary Broom with Hydraulic	12,522.00
	Angle Adjustment and HP2025 Hydraulic Power Unit - U.S.	
	Must only be used with HP2025 Hydraulic Power Pack Unit.	

HYDRAULIC POWER UNITS HP2025 - Hydraulic Power Unit, 25 HP

	Includes wiring harness to control the loader mounted implement.	
1095	Less HP2025 Hydraulic Power Unit	-6,499.00

OIL COOLER

2000	Oil Cooler for HP2025 and HP2134 Hydraulic Power Units Includes high efficiency oil cooler, electric fan, bolted support, hoses, fittings and installation instructions. Recommended for application generating high heat. Not available with option Code 1095.	In Base Price
2095	Less Oil Cooler	-1,660.00

ATTACHMENTS - ORDER AS DESIRED

Dust Deflector:

9000 SW2160 Steel/Rubber Dust Deflector Kit 263.89

Dust Suppression Kit:

SW21 Dust Suppression Kit

1,850.58

Includes 60 gallon water tank, electric pump, nozzles, hoses and fittings, electrical harness with switch and installation instructions. Requires the steel/rubber dust deflector kit.

Landscaping

SW2160 - 60 In. Hydraulic, 300 Series Carrier Loader Mount Rotary Broom with Hydraulic Angle Adjustment and HP2025 Hydraulic Power Unit - U.S. Continued

CODE	ATTACHMENT IDENTIFIER	DESCRIPTION	SUGGESTED LIST PRICE USD (\$)
		ATTACHMENTS - ORDER AS DESIREDContinued	
9020		Gauge Wheel Kit: SW21 Gauge Wheel Kit Includes two pairs 8 In. diameter by 3.5 In. wide solid wheels, mounting brackets and hardware.	632.00
9030		Lawn Dethatching Kit: SW21 Lawn Dethatching Kit Includes support components, hardware and installation instruction. Gauge wheel kit required. Compatible with dust suppression kit.	395.51
9040		Additional Wiring Harness for HP2025 and HP2134 Hydraulic Power Units for Open Operator Station Tractors Includes complete wiring harness from battery to switch in the console. Not available with option Code 1095.	92.00
		ATTACHMENTS FOR FIELD CONVERSION	
	5RDF0038	Miscellaneous: Additional Wiring Harness for HP2025 and HP2134 Hydraulic Power Units for Open Operator Station Tractors Includes complete wiring harness from battery to switch in the console.	88.26
	5RDF0036	Oil Cooler for HP2025 and HP2134 Hydraulic Power Units Includes high efficiency oil cooler, electric fan, bolted support, hoses, fittings and installation instructions. Recommended for application generating high heat.	1,650.86
	5RDF0035	SW21 Dust Suppression Kit Includes 60 gallon water tank, electric pump, nozzles, hoses and fittings, electrical harness with switch and installation instructions. Requires the steel/rubber dust deflector kit.	1,712.00
	5RDF0033	SW21 Gauge Wheel Kit Includes two pairs 8 In. diameter by 3.5 In. wide solid wheels, mounting brackets and hardware.	584.67
	5RDF0034	SW21 Lawn Dethatching Kit Requires gauge wheel kit, compatible with dust suppression kit.	365.89
	5RDF0043	SW2160 50/50 Poly/Steel Wafter Brush Replacement Kit Includes required quantity of wafters to replace entire brush.	540.88
	5RDF0030	SW2160 Dust Deflector Kit	244.13
	5RDF0040	SW2160 Poly Wafter Brush Replacement Kit Includes required quantity of wafters to replace entire brush.	525.43
	5RDF0078	Wiring Harness for HP2025 and HP2134 Hydraulic Power Units to control Loader Mounted Attachment Includes complete wiring harness from switch in the console to 3 cavities connectors for front implements.	126.19

Landscaping

SW2172 - 72 In. Hydraulic, 300/400 Series Carrier Loader Mount Rotary Broom with Hydraulic Angle Adjustment and HP2025 Hydraulic Power Unit - U.S.

Equipment for Base Machine

Function: Sweeping

Working Width: 72 In. (1,828.8 mm)

Working Width at Max Angle: 66 In. (1,676.4 mm)

Transport Width: 84 In. (2,133.6 mm) Operating Weight: 890 lb. (403.7 kg.)

Standard Bristle Material: Poly, 50/50 Steel/Poly

Available as Replacement Brush Speed: 160 RPM

Brush Diameter: 32 In. (812.8 mm) Angle Range: 23 degrees left or right

Hood Thickness: 14 gauge

Side Frame Thickness: 3/16 In. (4.8 mm)

Parking Stands Included

Approximate Set-Up Time: 30 Minutes

Function: Hydraulic Power Unit

Pressure: 2700 psi

Flow: 16 gpm

Reservoir Capacity: 15 gal.

System Capacity: 17 gal.

System Features: Pressure relieve valve, filter,

and oil level gauge, and thermal protection switch

Hoses, Tips, and Brackets included Tractor RPM: 540 RPM

PTO Manufacturer: Comer Parking Stand: Standard

Hitch Category: Category I

Quick Hitch Compatibility:

iMatch Compatible

Approximate Set-Up Time: 120 Minutes

Optional:

Function: Hydraulic Power Unit

Pressure: 2700 psi

Flow: 16 gpm

Reservoir Capacity: 15 gal.

System Capacity: 17 gal.

System Features: Pressure relieve valve, filter, temperature

and oil level gauge, and thermal protection switch Hoses, Tips, and Brackets included Tractor RPM: 540 RPM

PTO Manufacturer: Comer Parking Stand: Standard Hitch Category: Category

Quick Hitch Compatibility: iMatch Compatible

Approximate Set-Up Time: 120 Minutes

ATTACHMENT CODE **IDENTIFIER** DESCRIPTION **SUGGESTED** LIST PRICE USD (\$)

12,784.00

Select One Code From Each Required Category

BASE MACHINE

1592XF SW2172 - 72 In. Hydraulic, 300/400 Series Carrier Loader Mount Rotary Broom with Hydraulic Angle Adjustment and HP2025 Hydraulic Power Unit - U.S.

Must be used with either the HP2025 or HP2134 Hydraulic Power Pack Units.

HYDRAULIC POWER UNITS

1000 HP2025 - Hydraulic Power Unit, 25 HP In Base Price Includes wiring harness to control the loader mounted implement.

Less HP2025 Hydraulic Power Unit 1095 -6.499.00

1010 HP2134 - Hydraulic Power Unit, 34 HP 105.06 Includes wiring harness to control the loader mounted implement.

OIL COOLER

Oil Cooler for HP2025 and HP2134 Hydraulic Power Units 2000

In Base Price Includes high efficiency oil cooler, electric fan, bolted support, hoses, fittings and installation

instructions. Recommended for application generating high heat.

Not available with option Code 1095.

2095 Less Oil Cooler -1,660.00

Landscaping

SW2172 - 72 In. Hydraulic, 300/400 Series Carrier Loader Mount Rotary Broom with Hydraulic Angle Adjustment and HP2025 Hydraulic Power Unit - U.S. Continued

CODE	ATTACHMENT IDENTIFIER	DESCRIPTION	SUGGESTED LIST PRICE USD (\$)
		ATTACHMENTS - ORDER AS DESIRED	
9000		Dust Deflector: SW2172 Steel/Rubber Dust Deflector Kit	237.74
9010		Dust Suppression Kit: SW21 Dust Suppression Kit Includes 60 gallon water tank, electric pump, nozzles, hoses and fittings, electrical harness with switch and installation instructions. Requires the steel/rubber dust deflector kit.	1,850.58
9020		Gauge Wheel Kit: SW21 Gauge Wheel Kit Includes two pairs 8 In. diameter by 3.5 In. wide solid wheels, mounting brackets and hardware.	632.00
9030		Lawn Dethatching Kit: SW21 Lawn Dethatching Kit Includes support components, hardware and installation instruction. Gauge wheel kit required. Compatible with dust suppression kit.	395.51
9040		Additional Wiring Harness for HP2025 and HP2134 Hydraulic Power Units for Open Operator Station Tractors Includes complete wiring harness from battery to switch in the console. Not available with option Code 1095.	92.00
		ATTACHMENTS FOR FIELD CONVERSION	
	5RDF0038	Miscellaneous: Additional Wiring Harness for HP2025 and HP2134 Hydraulic Power Units for Open Operator Station Tractors Includes complete wiring harness from battery to switch in the console.	88.26
	5RDF0036	Oil Cooler for HP2025 and HP2134 Hydraulic Power Units Includes high efficiency oil cooler, electric fan, bolted support, hoses, fittings and installation instructions. Recommended for application generating high heat.	1,650.86
	5RDF0035	SW21 Dust Suppression Kit Includes 60 gallon water tank, electric pump, nozzles, hoses and fittings, electrical harness with switch and installation instructions. Requires the steel/rubber dust deflector kit.	1,712.00
	5RDF0033	SW21 Gauge Wheel Kit Includes two pairs 8 In. diameter by 3.5 In. wide solid wheels, mounting brackets and hardware.	584.67
	5RDF0034	SW21 Lawn Dethatching Kit Requires gauge wheel kit, compatible with dust suppression kit.	365.89
	5RDF0044	SW2172 50/50 Poly/Steel Wafter Brush Replacement Kit Includes required quantity of wafters to replace entire brush.	620.65
	5RDF0031	SW2172 Dust Deflector Kit	219.95

Landscaping

SW2172 - 72 In. Hydraulic, 300/400 Series Carrier Loader Mount Rotary Broom with Hydraulic Angle Adjustment and HP2025 Hydraulic Power Unit - U.S. Continued

CODE	ATTACHMENT IDENTIFIER	DESCRIPTION	SUGGESTED LIST PRICE USD (\$)
	5RDF0041	ATTACHMENTS FOR FIELD CONVERSIONContinued SW2172 Poly Wafter Brush Replacement Kit Includes required quantity of wafters to replace entire brush.	620.65
	5RDF0078	Wiring Harness for HP2025 and HP2134 Hydraulic Power Units to control Loader Mounted Attachment Includes complete wiring harness from switch in the console to 3 cavities connectors for front implements.	126.19

SW2172 - 72 In. Hydraulic, 300/400 Series Carrier Loader Mount Rotary Broom with Hydraulic Angle Adjustment and HP2025 Hydraulic Power Unit - U.S. Continued THIS PAGE IS INTENTIONALLY LEFT BLANK

Landscaping

SW2184 - 84 In. Hydraulic, 400 Series Carrier Loader Mount Rotary Broom with Hydraulic Angle Adjustment and HP2134 Hydraulic Power Unit - U.S.

Equipment for Base Machine

Function: Sweeping

Working Width: 84 In. (2,133.6 mm)

Working Width at Max Angle: 77 In. (1,955.8 mm) Transport Width: 96 In. (2,438.4 mm)

Operating Weight: 920 lb. (417.3 kg.)

Standard Bristle Material: Poly, 50/50 Steel/Poly

Available as Replacement Brush Speed: 160 RPM

Brush Diameter: 32 In. (812.8 mm) Angle Range: 23 degrees left or right

Hood Thickness: 14 gauge

Side Frame Thickness: 3/16 In. (4.8 mm)

Parking Stands Included

Approximate Set-Up Time: 30 Minutes

Function: Hydraulic Power Unit

Pressure: 2700 psi

Flow: 16 gpm

Reservoir Capacity: 15 gal.

System Capacity: 17 gal.

System Features: Pressure relieve valve, filter,

temperature

and oil level gauge, and thermal protection switch

Hoses, Tips, and Brackets included Tractor RPM: 540 RPM

PTO Manufacturer: Comer Parking Stand: Standard Hitch Category: Category Quick Hitch Compatibility:

iMatch Compatible

Approximate Set-Up Time: 120 Minutes

			SUGGESTED
	ATTACHMENT		LIST PRICE
CODE	IDENTIFIER	DESCRIPTION	USD (\$)

Select One Code From Each Required Category

BASE MACHINE

1593XF	SW2184 - 84 In. Hydraulic, 400 Series Carrier Loader Mount Rotary Broom with Hydraulic	13,504.00
	Angle Adjustment and HP2134 Hydraulic Power Unit - U.S.	
	Must only be used with HP2134 Hydraulic Power Pack Unit	

HYDRAULIC POWER UNITS

1010	HP2134 - Hydraulic Power Unit, 34 HP <i>Includes wiring harness to control the loader mounted implement.</i>	In Base Price
1095	Less HP2134 Hydraulic Power Unit	-6,610.00

OIL COOLER

2000	Oil Cooler for HP2025 and HP2134 Hydraulic Power Units Includes high efficiency oil cooler, electric fan, bolted support, hoses, fittings and installation instructions. Recommended for application generating high heat. Not available with option Code 1095.	In Base Price
2095	Less Oil Cooler	-1.660.00

ATTACHMENTS - ORDER AS DESIRED

Dust Deflector:

9000 SW2184 Steel/Rubber Dust Deflector Kit 237.53

Dust Suppression Kit:

9010 1,850.58 SW21 Dust Suppression Kit

Includes 60 gallon water tank, electric pump, nozzles, hoses and fittings, electrical harness with switch and installation instructions. Requires the steel/rubber dust deflector kit.

Landscaping

SW2184 - 84 In. Hydraulic, 400 Series Carrier Loader Mount Rotary Broom with Hydraulic Angle Adjustment and HP2134 Hydraulic Power Unit - U.S. Continued

CODE	ATTACHMENT IDENTIFIER	DESCRIPTION	SUGGESTED LIST PRICE USD (\$)
		ATTACHMENTS - ORDER AS DESIREDContinued	
9020		Gauge Wheel Kit: SW21 Gauge Wheel Kit Includes two pairs 8 In. diameter by 3.5 In. wide solid wheels, mounting brackets and hardware.	632.00
9030		Lawn Dethatching Kit: SW21 Lawn Dethatching Kit Includes support components, hardware and installation instruction. Gauge wheel kit required. Compatible with dust suppression kit.	395.51
9040		Additional Wiring Harness for HP2025 and HP2134 Hydraulic Power Units for Open Operator Station Tractors Includes complete wiring harness from battery to switch in the console. Not available with option Code 1095.	92.00
		ATTACHMENTS FOR FIELD CONVERSION	
	5RDF0038	Miscellaneous: Additional Wiring Harness for HP2025 and HP2134 Hydraulic Power Units for Open Operator Station Tractors Includes complete wiring harness from battery to switch in the console.	88.26
	5RDF0036	Oil Cooler for HP2025 and HP2134 Hydraulic Power Units Includes high efficiency oil cooler, electric fan, bolted support, hoses, fittings and installation instructions. Recommended for application generating high heat.	1,650.86
	5RDF0035	SW21 Dust Suppression Kit Includes 60 gallon water tank, electric pump, nozzles, hoses and fittings, electrical harness with switch and installation instructions. Requires the steel/rubber dust deflector kit.	1,712.00
	5RDF0033	SW21 Gauge Wheel Kit Includes two pairs 8 In. diameter by 3.5 In. wide solid wheels, mounting brackets and hardware.	584.67
	5RDF0034	SW21 Lawn Dethatching Kit Requires gauge wheel kit, compatible with dust suppression kit.	365.89
	5RDF0045	SW2184 50/50 Poly/Steel Wafter Brush Replacement Kit Includes required quantity of wafters to replace entire brush.	726.45
	5RDF0032	SW2184 Dust Deflector Kit	219.74
	5RDF0042	SW2184 Poly Wafter Brush Replacement Kit Includes required quantity of wafters to replace entire brush.	724.90
	5RDF0078	Wiring Harness for HP2025 and HP2134 Hydraulic Power Units to control Loader Mounted Attachment Includes complete wiring harness from switch in the console to 3 cavities connectors for front implements.	126.19

Landscaping

SW2160 - 60 In. Hydraulic, 300 Series Loader Mount Rotary Broom with Hydraulic Angle Adjustment and HP2025 Hydraulic Power Unit - Canada

Equipment for Base Machine

Function: Sweeping

Working Width: 60 In. (1,524 mm)

Working Width at Max Angle: 55 In. (1,397 mm) Transport Width: 72 In. (1,828.8 mm)

Operating Weight: 860 lb. (390 kg.)

Standard Bristle Material: Poly, 50/50 Steel/Poly

Available as Replacement Brush Speed: 160 RPM

Brush Diameter: 32 In. (812.8 mm) Angle Range: 23 degrees left or right

Hood Thickness: 14 gauge

Side Frame Thickness: 3/16 In. (4.8 mm)

Parking Stands Included

Approximate Set-Up Time: 30 Minutes

Function: Hydraulic Power Unit

Pressure: 2700 psi

9010

Flow: 16 gpm Reservoir Capacity: 15 gal. System Capacity: 17 gal.

System Features: Pressure relieve valve, filter,

temperature

and oil level gauge, and thermal protection switch

Hoses, Tips, and Brackets included Tractor RPM: 540 RPM

PTO Manufacturer: Comer Parking Stand: Standard Hitch Category: Category Quick Hitch Compatibility:

iMatch Compatible

Approximate Set-Up Time: 120 Minutes

	ATTACHMENT	
CODE	IDENTIFIER	DESCRIPTION

SUGGESTED LIST PRICE USD (\$)

Select One Code From Each Required Category

BASE MACHINE

159AXF	SW2160 - 60 In. Hydraulic, 300 Series Loader Mount Rotary Broom with Hydraulic Angle	12.948.43
	Adjustment and HP2025 Hydraulic Power Unit - Canada	,
	Must only be used with HP2025 Hydraulic Power Pack Unit.	

HYDRAULIC POWER UNITS

1000	HP2025 - Hydraulic Power Unit, 25 HP <i>Includes wiring harness to control the loader mounted implement.</i>	In Base Price
1095	Less HP2025 Hydraulic Power Unit	-6,810.11

OIL COOLER

2000	Oil Cooler for HP2025 and HP2134 Hydraulic Power Units Includes high efficiency oil cooler, electric fan, bolted support, hoses, fittings and installation instructions. Recommended for application generating high heat. Not available with option Code 1095.	In Base Price
2095	Less Oil Cooler	-1,735.78

ATTACHMENTS - ORDER AS DESIRED

Dust Deflector:

9000 SW2160 Steel/Rubber Dust Deflector Kit 291.60

Dust Suppression Kit:

SW21 Dust Suppression Kit

2,044.89

Includes 60 gallon water tank, electric pump, nozzles, hoses and fittings, electrical harness with switch and installation instructions. Requires the steel/rubber dust deflector kit.

Landscaping

SW2160 - 60 In. Hydraulic, 300 Series Loader Mount Rotary Broom with Hydraulic Angle Adjustment and HP2025 Hydraulic Power Unit - Canada Continued

CODE	ATTACHMENT IDENTIFIER	DESCRIPTION	SUGGESTED LIST PRICE USD (\$)
		ATTACHMENTS - ORDER AS DESIREDContinued	
9020		Gauge Wheel Kit: SW21 Gauge Wheel Kit Includes two pairs 8 In. diameter by 3.5 In. wide solid wheels, mounting brackets and hardware.	698.36
9030		Lawn Dethatching Kit: SW21 Lawn Dethatching Kit Includes support components, hardware and installation instruction. Gauge wheel kit required. Compatible with dust suppression kit.	437.04
9040		Additional Wiring Harness for HP2025 and HP2134 Hydraulic Power Units for Open Operator Station Tractors Includes complete wiring harness from battery to switch in the console. Not available with option Code 1095.	101.66
		ATTACHMENTS FOR FIELD CONVERSION	
	5RDF0038	Miscellaneous: Additional Wiring Harness for HP2025 and HP2134 Hydraulic Power Units for Open Operator Station Tractors Includes complete wiring harness from battery to switch in the console.	88.26
	5RDF0036	Oil Cooler for HP2025 and HP2134 Hydraulic Power Units Includes high efficiency oil cooler, electric fan, bolted support, hoses, fittings and installation instructions. Recommended for application generating high heat.	1,650.86
	5RDF0035	SW21 Dust Suppression Kit Includes 60 gallon water tank, electric pump, nozzles, hoses and fittings, electrical harness with switch and installation instructions. Requires the steel/rubber dust deflector kit.	1,712.00
	5RDF0033	SW21 Gauge Wheel Kit Includes two pairs 8 In. diameter by 3.5 In. wide solid wheels, mounting brackets and hardware.	584.67
	5RDF0034	SW21 Lawn Dethatching Kit Requires gauge wheel kit, compatible with dust suppression kit.	365.89
	5RDF0043	SW2160 50/50 Poly/Steel Wafter Brush Replacement Kit Includes required quantity of wafters to replace entire brush.	540.88
	5RDF0030	SW2160 Dust Deflector Kit	244.13
	5RDF0040	SW2160 Poly Wafter Brush Replacement Kit Includes required quantity of wafters to replace entire brush.	525.43
	5RDF0078	Wiring Harness for HP2025 and HP2134 Hydraulic Power Units to control Loader Mounted Attachment Includes complete wiring harness from switch in the console to 3 cavities connectors for front implements.	126.19

Landscaping

SW2172 - 72 In. Hydraulic, 300/400 Series Carrier Loader Mount Rotary Broom with Hydraulic Angle Adjustment and HP2025 Hydraulic Power Unit - Canada

Equipment for Base Machine

Function: Sweeping

Working Width: 72 In. (1,828.8 mm)

Working Width at Max Angle: 66 In. (1,676.4 mm)

Transport Width: 84 In. (2,133.6 mm) Operating Weight: 890 lb. (403.7 kg.)

Standard Bristle Material: Poly, 50/50 Steel/Poly

Available as Replacement Brush Speed: 160 RPM

Brush Diameter: 32 In. (812.8 mm) Angle Range: 23 degrees left or right

Hood Thickness: 14 gauge

Side Frame Thickness: 3/16 In. (4.8 mm)

Parking Stands Included

Approximate Set-Up Time: 30 Minutes

Function: Hydraulic Power Unit

Pressure: 2700 psi

Flow: 16 gpm

Reservoir Capacity: 15 gal.

System Capacity: 17 gal.

System Features: Pressure relieve valve, filter,

and oil level gauge, and thermal protection switch

Hoses, Tips, and Brackets included Tractor RPM: 540 RPM

PTO Manufacturer: Comer Parking Stand: Standard Hitch Category: Category I Quick Hitch Compatibility:

iMatch Compatible

Approximate Set-Up Time: 120 Minutes

Optional:

Function: Hydraulic Power Unit

Pressure: 2700 psi

Flow: 16 gpm

Reservoir Capacity: 15 gal.

System Capacity: 17 gal.

System Features: Pressure relieve valve, filter,

temperature

and oil level gauge, and thermal protection switch

Hoses, Tips, and Brackets included Tractor RPM: 540 RPM

PTO Manufacturer: Comer Parking Stand: Standard Hitch Category: Category

Quick Hitch Compatibility: iMatch Compatible

Approximate Set-Up Time: 120 Minutes

ATTACHMENT CODE **IDENTIFIER** DESCRIPTION **SUGGESTED** LIST PRICE USD (\$)

Select One Code From Each Required Category

BASE MACHINE

159BXF SW2172 - 72 In. Hydraulic, 300/400 Series Carrier Loader Mount Rotary Broom with Hydraulic Angle Adjustment and HP2025 Hydraulic Power Unit - Canada

Must be used with either the HP2025 or HP2134 Hydraulic Power Pack Units.

13,223.08

121.11

In Base Price

HYDRAULIC POWER UNITS

1000	HP2025 - Hydraulic Power Unit, 25 HP	In Base Price
	Includes wiring harness to control the loader mounted implement	

Less HP2025 Hydraulic Power Unit -6.810.111095

1010 HP2134 - Hydraulic Power Unit, 34 HP

Includes wiring harness to control the loader mounted implement.

OIL COOLER

Oil Cooler for HP2025 and HP2134 Hydraulic Power Units 2000 Includes high efficiency oil cooler, electric fan, bolted support, hoses, fittings and installation

instructions. Recommended for application generating high heat.

Not available with option Code 1095.

2095 Less Oil Cooler -1,735.78

Landscaping

SW2172 - 72 In. Hydraulic, 300/400 Series Carrier Loader Mount Rotary Broom with Hydraulic Angle Adjustment and HP2025 Hydraulic Power Unit - Canada Continued

CODE	ATTACHMENT IDENTIFIER	DESCRIPTION	SUGGESTED LIST PRICE USD (\$)
		ATTACHMENTS - ORDER AS DESIRED	
9000		Dust Deflector: SW2172 Steel/Rubber Dust Deflector Kit	262.71
9010		Dust Suppression Kit: SW21 Dust Suppression Kit Includes 60 gallon water tank, electric pump, nozzles, hoses and fittings, electrical harness with switch and installation instructions. Requires the steel/rubber dust deflector kit.	2,044.89
9020		Gauge Wheel Kit: SW21 Gauge Wheel Kit Includes two pairs 8 In. diameter by 3.5 In. wide solid wheels, mounting brackets and hardware.	698.36
9030		Lawn Dethatching Kit: SW21 Lawn Dethatching Kit Includes support components, hardware and installation instruction. Gauge wheel kit required. Compatible with dust suppression kit.	437.04
9040		Additional Wiring Harness for HP2025 and HP2134 Hydraulic Power Units for Open Operator Station Tractors Includes complete wiring harness from battery to switch in the console. Not available with option Code 1095.	101.66
		ATTACHMENTS FOR FIELD CONVERSION	
	5RDF0038	Miscellaneous: Additional Wiring Harness for HP2025 and HP2134 Hydraulic Power Units for Open Operator Station Tractors Includes complete wiring harness from battery to switch in the console.	88.26
	5RDF0036	Oil Cooler for HP2025 and HP2134 Hydraulic Power Units Includes high efficiency oil cooler, electric fan, bolted support, hoses, fittings and installation instructions. Recommended for application generating high heat.	1,650.86
	5RDF0035	SW21 Dust Suppression Kit Includes 60 gallon water tank, electric pump, nozzles, hoses and fittings, electrical harness with switch and installation instructions. Requires the steel/rubber dust deflector kit.	1,712.00
	5RDF0033	SW21 Gauge Wheel Kit Includes two pairs 8 In. diameter by 3.5 In. wide solid wheels, mounting brackets and hardware.	584.67
	5RDF0034	SW21 Lawn Dethatching Kit Requires gauge wheel kit, compatible with dust suppression kit.	365.89
	5RDF0044	SW2172 50/50 Poly/Steel Wafter Brush Replacement Kit Includes required quantity of wafters to replace entire brush.	620.65
	5RDF0031	SW2172 Dust Deflector Kit	219.95

Landscaping

SW2172 - 72 In. Hydraulic, 300/400 Series Carrier Loader Mount Rotary Broom with Hydraulic Angle Adjustment and HP2025 Hydraulic Power Unit - Canada Continued

CODE	ATTACHMENT IDENTIFIER	DESCRIPTION	SUGGESTED LIST PRICE USD (\$)
	5RDF0041	ATTACHMENTS FOR FIELD CONVERSIONContinued SW2172 Poly Wafter Brush Replacement Kit Includes required quantity of wafters to replace entire brush.	620.65
	5RDF0078	Wiring Harness for HP2025 and HP2134 Hydraulic Power Units to control Loader Mounted Attachment Includes complete wiring harness from switch in the console to 3 cavities connectors for front implements.	126.19

SW2172 - 72 In. Hydraulic, 300/400 Series Carrier Loader Mount Rotary Broom with Hydraulic Angle Adjustment and HP2025 Hydraulic Power Unit - Canada Continued

THIS PAGE IS INTENTIONALLY LEFT BLANK

Landscaping

SW2184 - 84 In. Hydraulic, 400 Series Carrier Loader Mount Rotary Broom with Hydraulic Angle Adjustment and HP2143 Hydraulic Power Unit - Canada

Equipment for Base Machine

Function: Sweeping

Working Width: 84 In. (2,133.6 mm)

Working Width at Max Angle: 77 In. (1,955.8 mm) Transport Width: 96 In. (2,438.4 mm)

Operating Weight: 920 lb. (417.3 kg.)

Standard Bristle Material: Poly, 50/50 Steel/Poly

Available as Replacement Brush Speed: 160 RPM

Brush Diameter: 32 In. (812.8 mm) Angle Range: 23 degrees left or right

Hood Thickness: 14 gauge

Side Frame Thickness: 3/16 In. (4.8 mm)

Parking Stands Included

Approximate Set-Up Time: 30 Minutes

Function: Hydraulic Power Unit

Pressure: 2700 psi

Flow: 16 gpm

Reservoir Capacity: 15 gal.

System Capacity: 17 gal.

System Features: Pressure relieve valve, filter,

temperature

and oil level gauge, and thermal protection switch

SUGGESTED LIST PRICE USD (\$)

Hoses, Tips, and Brackets included Tractor RPM: 540 RPM

PTO Manufacturer: Comer Parking Stand: Standard Hitch Category: Category Quick Hitch Compatibility:

iMatch Compatible

Approximate Set-Up Time: 120 Minutes

	ATTACHMENT	
CODE	IDENTIFIER	DESCRIPTION

Select One Code From Each Required Category

BASE MACHINE

159CXF	SW2184 - 84 In. Hydraulic, 400 Series Carrier Loader Mount Rotary Broom with Hydraulic	13,966.23
	Angle Adjustment and HP2143 Hydraulic Power Unit - Canada	
	Must only be used with HP2134 Hydraulic Power Pack Unit.	

HYDRAULIC POWER UNITS

1010	HP2134 - Hydraulic Power Unit, 34 HP <i>Includes wiring harness to control the loader mounted implement.</i>	In Base Price
1095	Less HP2134 Hydraulic Power Unit	-6,924.73

OIL COOLER

2000	Oil Cooler for HP2025 and HP2134 Hydraulic Power Units Includes high efficiency oil cooler, electric fan, bolted support, hoses, fittings and installation instructions. Recommended for application generating high heat. Not available with option Code 1095.	In Base Price
2095	Less Oil Cooler	-1,735.78

ATTACHMENTS - ORDER AS DESIRED

Dust Deflector:

9000 SW2184 Steel/Rubber Dust Deflector Kit 262.47

Dust Suppression Kit:

9010 2,044.89 SW21 Dust Suppression Kit

Includes 60 gallon water tank, electric pump, nozzles, hoses and fittings, electrical harness with switch and installation instructions. Requires the steel/rubber dust deflector kit.

Landscaping

SW2184 - 84 In. Hydraulic, 400 Series Carrier Loader Mount Rotary Broom with Hydraulic Angle Adjustment and HP2143 Hydraulic Power Unit - Canada Continued

CODE	ATTACHMENT IDENTIFIER	DESCRIPTION	SUGGESTED LIST PRICE USD (\$)
		ATTACHMENTS - ORDER AS DESIREDContinued	
9020		Gauge Wheel Kit: SW21 Gauge Wheel Kit Includes two pairs 8 In. diameter by 3.5 In. wide solid wheels, mounting brackets and hardware.	698.36
9030		Lawn Dethatching Kit: SW21 Lawn Dethatching Kit Includes support components, hardware and installation instruction. Gauge wheel kit required. Compatible with dust suppression kit.	437.04
9040		Additional Wiring Harness for HP2025 and HP2134 Hydraulic Power Units for Open Operator Station Tractors Includes complete wiring harness from battery to switch in the console. Not available with option Code 1095.	101.66
		ATTACHMENTS FOR FIELD CONVERSION	
	5RDF0038	Miscellaneous: Additional Wiring Harness for HP2025 and HP2134 Hydraulic Power Units for Open Operator Station Tractors Includes complete wiring harness from battery to switch in the console.	88.26
	5RDF0036	Oil Cooler for HP2025 and HP2134 Hydraulic Power Units Includes high efficiency oil cooler, electric fan, bolted support, hoses, fittings and installation instructions. Recommended for application generating high heat.	1,650.86
	5RDF0035	SW21 Dust Suppression Kit Includes 60 gallon water tank, electric pump, nozzles, hoses and fittings, electrical harness with switch and installation instructions. Requires the steel/rubber dust deflector kit.	1,712.00
	5RDF0033	SW21 Gauge Wheel Kit Includes two pairs 8 In. diameter by 3.5 In. wide solid wheels, mounting brackets and hardware.	584.67
	5RDF0034	SW21 Lawn Dethatching Kit Requires gauge wheel kit, compatible with dust suppression kit.	365.89
	5RDF0045	SW2184 50/50 Poly/Steel Wafter Brush Replacement Kit Includes required quantity of wafters to replace entire brush.	726.45
	5RDF0032	SW2184 Dust Deflector Kit	219.74
	5RDF0042	SW2184 Poly Wafter Brush Replacement Kit Includes required quantity of wafters to replace entire brush.	724.90
	5RDF0078	Wiring Harness for HP2025 and HP2134 Hydraulic Power Units to control Loader Mounted Attachment Includes complete wiring harness from switch in the console to 3 cavities connectors for front implements.	126.19

Landscaping

RT1142 - 42 In. Standard Duty Rotary Tiller

Equipment for Base Machine

Working Width:
 42 In. (1,066.8 mm)
Tractor PTO Speed: 540 RPM
Tractor PTO HP (Minimum): 10 HP (7.5 kW)
Tractor PTO HP (Minimum): 25 HP (18.6 kW)
Blade Shape: C
Skid Shoes: Adjustable
Rear Door Support: Chain
Parking Stand Included
Gearbox Speed: Single
Rotor Speed: 254 RPM
Rotor Flanges: 5
Drive Chain: ASA 80
Blades/Rotor: 4

Max Working Depth:
6.3 In. (160 mm)
Outside to Outside Width:
46 In. (1,168.4 mm)
Driveline Protection: Shear Bolt
Tillage Depth Control: Skid Shoes
Hitch:
Category I, iMatch Compatible
Frame: Heavy Duty Single Layer

ATTACHMENT
CODE IDENTIFIER DESC

Adjustable Offset: 4 In. (101.6 mm)

DESCRIPTION

SUGGESTED LIST PRICE USD (\$)

Select One Code From Each Required Category

BASE MACHINE

1357XF RT1142 - 42 In. Standard Duty Rotary Tiller

2,208.00

ATTACHMENTS FOR FIELD CONVERSION

Miscellaneous:

5MHF20020375

French Kit - For RT1142, RT1149, RT1157, RT1165. and RT1265 Includes Operators Manual, Parts Catalog, and Safety Decals.

RT1142 - 42 In. Standard Duty Rotary Tiller Continued

THIS PAGE IS INTENTIONALLY LEFT BLANK

Landscaping

RT1149 - 49 In. Standard Duty Rotary Tiller

Equipment for Base Machine

Working Width:
49 In. (1,244.6 mm)
Tractor PTO Speed: 540 RPM
Tractor PTO HP (Minimum): 20 HP (14.9 kW)
Tractor PTO HP (Minimum): 25 HP (18.6 kW)
Blade Shape: C
Skid Shoes: Adjustable
Rear Door Support: Chain
Parking Stand Included
Gearbox Speed: Single
Rotor Speed: 208 RPM
Rotor Flanges: 6

Max Working Depth:
6.3 In. (160 mm)
Outside to Outside Width:
54 In. (1,371.6 mm)
Driveline Protection: Friction Clutch
Tillage Depth Control: Skid Shoes
Hitch:
Category I, iMatch Compatible
Frame: Heavy Duty Single Layer

ATTACHMENT
CODE IDENTIFIER DESC

Drive Chain: ASA 80 Blades/Rotor: 4 Adjustable Offset: 8 In. (203.2 mm)

DESCRIPTION

SUGGESTED LIST PRICE USD (\$)

Select One Code From Each Required Category

BASE MACHINE

1358XF RT1149 - 49 In. Standard Duty Rotary Tiller

2,358.00

ATTACHMENTS FOR FIELD CONVERSION

Miscellaneous:

5MHF20020375

French Kit - For RT1142, RT1149, RT1157, RT1165. and RT1265 Includes Operators Manual, Parts Catalog, and Safety Decals.

RT1149 - 49 In. Standard Duty Rotary Tiller Continued

THIS PAGE IS INTENTIONALLY LEFT BLANK

Landscaping

RT1157 - 57 In. Standard Duty Rotary Tiller

Equipment for Base Machine

Working Width:

Working width.
57 In. (1,447.8 mm)
Tractor PTO Speed: 540 RPM
Tractor PTO HP (Minimum): 25 HP (18.6 kW)
Tractor PTO HP (Maximum): 40 HP (29.8 kW)

Blade Shape: C Skid Shoes: Adjustable Rear Door Support: Chain Parking Stand Included Gearbox Speed: Single Rotor Speed: 208 RPM Rotor Flanges: 7 Drive Chain: ASA 80 Blades/Rotor: 6

Adjustable Offset: 19 In. (482.6 mm) Max Working Depth:

7.0 In. (177.8 mm) Outside to Outside Width: 62 In. (1,574.8 mm) Driveline Protection: Friction Clutch Tillage Depth Control: Skid Shoes

Hitch: Category I or II, iMatch and Quick Coupler Compatible

Frame:

Heavy Duty and Bent Frame with Extra Thickness Above Rotor

ATTACHMENT CODE **IDENTIFIER**

DESCRIPTION

SUGGESTED LIST PRICE USD (\$)

Select One Code From Each Required Category

BASE MACHINE

1359XF RT1157 - 57 In. Standard Duty Rotary Tiller 2,920.00

ATTACHMENTS FOR FIELD CONVERSION

Miscellaneous:

5MHF20020375

French Kit - For RT1142, RT1149, RT1157, RT1165. and RT1265 Includes Operators Manual, Parts Catalog, and Safety Decals.

36.02

RT1157 - 57 In. Standard Duty Rotary Tiller Continued

	Continued
-	THIS PAGE IS INTENTIONALLY LEFT BLANK

Landscaping

RT1165 - 65 In. Standard Duty Rotary Tiller

Equipment for Base Machine

Working Width:

65 In. (1,651 mm)
Tractor PTO Speed: 540 RPM
Tractor PTO HP (Minimum): 30 HP (22.4 kW)
Tractor PTO HP (Maximum): 40 HP (29.8 kW)

Blade Shape: C Skid Shoes: Adjustable Rear Door Support: Chain Parking Stand Included Gearbox Speed: Single Rotor Speed: 208 RPM Rotor Flanges: 8 Drive Chain: ASA 80 Blades/Rotor: 6

Adjustable Offset: 23 In. (584.2 mm) Max Working Depth:

7.0 In. (177.8 mm) Outside to Outside Width: 70 In. (1,778 mm)

Driveline Protection: Friction Clutch Tillage Depth Control: Skid Shoes

Hitch:

Category I or II, iMatch and Quick Coupler Compatible

Frame:

Heavy Duty and Bent Frame with Extra Thickness Above Rotor

ATTACHMENT CODE **IDENTIFIER**

DESCRIPTION

SUGGESTED LIST PRICE USD (\$)

Select One Code From Each Required Category

BASE MACHINE

135AXF

RT1165 - 65 In. Standard Duty Rotary Tiller

3,465.00

ATTACHMENTS FOR FIELD CONVERSION

Miscellaneous:

5MHF20020375

French Kit - For RT1142, RT1149, RT1157, RT1165. and RT1265 Includes Operators Manual, Parts Catalog, and Safety Decals.

36.02

RT1165 - 65 In. Standard Duty Rotary Tiller

	Continued	
Т	HIS PAGE IS INTENTIONALLY L	EFT BLANK

Landscaping

RT1173 - 73 In. Standard Duty Rotary Tiller

Equipment for Base Machine

Working Width:

73 In. (1,854.2 mm)
Tractor PTO Speed: 540 RPM
Tractor PTO HP (Minimum): 45 HP (33.6 kW)
Tractor PTO HP (Maximum): 60 HP (44.7 kW)

Blade Shape: C Skid Shoes: Adjustable Rear Door Support: Spring Parking Stand Included Gearbox Speed: Single Rotor Speed: 228 RPM Rotor Flanges: 10

Side Drive: Gear Blades/Rotor: 6

Adjustable Lower Hitches

Max Working Depth:

8.7 In. (221 mm) Outside to Outside Width: 78 In. (1,981.2 mm) Driveline Protection: Friction Clutch Tillage Depth Control: Skid Shoes

Hitch: Category II, Quick Coupler Compatible

Frame:

Heavy Duty and Bent Frame with Extra Thickness Above Rotor

ATTACHMENT CODE **IDENTIFIER**

DESCRIPTION

SUGGESTED LIST PRICE USD (\$)

Select One Code From Each Required Category

BASE MACHINE

135BXF RT1173 - 73 In. Standard Duty Rotary Tiller

4,426.00

ATTACHMENTS FOR FIELD CONVERSION

Miscellaneous:

MHF20020376

French Kit - For RT1173, RT1181, RT2283, RT2283C, RT1273, and RT2293 Includes Operators Manual, Parts Catalog, and Safety Decals.

45.04

RT1173 - 73 In. Standard Duty Rotary Tiller

Continued
THIS PAGE IS INTENTIONALLY LEFT BLANK
THIS PAGE IS INTENTIONALLY LEFT BLANK

Landscaping

RT1181 - 81 In. Standard Duty Rotary Tiller

Equipment for Base Machine

Working Width:

Working width.
81 In. (2,057.4 mm)
Tractor PTO Speed: 540 RPM
Tractor PTO HP (Minimum): 50 HP (37.3 kW)
Tractor PTO HP (Maximum): 60 HP (44.7kW)

Blade Shape: C Skid Shoes: Adjustable Parking Stand Included Gearbox Speed: Single Rotor Speed: 228 RPM Rotor Flanges: 11 Side Drive: Gear Blades/Rotor: 6

Rear Door Support: Spring

Max Working Depth: 7.9 In. (200.7 mm) Outside to Outside Width: 86 In. (2,184.4 mm)

Driveline Protection: Friction Disc Tillage Depth Control: Skid Shoes

Hitch:

Category II, Quick Coupler Compatible

ATTACHMENT IDENTIFIER CODE **DESCRIPTION** SUGGESTED LIST PRICE USD (\$)

Select One Code From Each Required Category

BASE MACHINE

135CXF RT1181 - 81 In. Standard Duty Rotary Tiller 4,896.00

ATTACHMENTS FOR FIELD CONVERSION

Miscellaneous:

MHF20020376

French Kit - For RT1173, RT1181, RT2283, RT2283C, RT1273, and RT2293 Includes Operators Manual, Parts Catalog, and Safety Decals.

45.04

RT1181 - 81 In. Standard Duty Rotary Tiller

Continued
THIS PAGE IS INTENTIONALLY LEFT BLANK

Landscaping

RT1265 - 65 In. Medium Duty Rotary Tiller

Equipment for Base Machine

Working Width:
65 In. (165 cm)
Tractor PTO Speed: 540 RPM
Tractor PTO HP (Minimum):
30 HP (22 kW)
Tractor PTO HP (Maximum):
60 HP (44 kW)
Blade Shape: L
Skid Shoes: Adjustable
Rear Door Support: Chain
Parking Stand Included
Gearbox Speed: Single
Rotor Speed: 208 RPM
Rotor Flanges: 8
Blades/Rotor: 6
Max Working Depth:

7.9 In. (20 cm)
Outside to Outside Width:
70 In. (178 cm)
Driveline Protection: Friction Clutch
Tillage Depth Control: Skid Shoes
Hitch: Category I or II, iMatch
and Quick Coupler Compatible
Frame:
Heavy Duty and Bent Frame with
Extra Thickness Above Rotor

ATTACHMENT
CODE IDENTIFIER DI

DESCRIPTION

SUGGESTED LIST PRICE USD (\$)

Select One Code From Each Required Category

BASE MACHINE

136AXF

RT1265 - 65 In. Medium Duty Rotary Tiller *Skid shoes in base. No Roller Option.*

4,098.00

ATTACHMENTS FOR FIELD CONVERSION

Miscellaneous:

5MHF20020375

French Kit - For RT1142, RT1149, RT1157, RT1165. and RT1265 *Includes Operators Manual, Parts Catalog, and Safety Decals.*

36.02

THIS PAGE IS INTENTIONALLY LEFT BLANK

Landscaping

RT1273 - 73 In. Medium Duty Rotary Tiller

Equipment for Base Machine

Working Width:
73 In. (185 cm)
Tractor PTO speed: 540 RPM
Tractor PTO HP (Minimum):
30 HP (22 kW)
Tractor PTO HP (Maximum):
80 HP (59 kW)
Blade Shape: L
Skid Shoes: Adjustable
Side Drive: Gear
Rear Door Support: Chain
Parking Stand Included
Gearbox Speed: Single
Rotor Speed: 213 RPM
Rotor Flanges: 8
Blades/Rotor: 6
Adjustable Lower Hitches
Max Working Depth:

8.7 In. (22 cm)

Outside to Outside Width:
77 In. (196 cm)
Driveline Protection:
Friction Clutch
Tillage Depth Control:
Skid Shoes
Hitch: Category II,
Quick Coupler Compatible
Frame:
Double-Wall Frame Construction
Above Rotor for Strength and
Rock Protection

ATTACHMENT
CODE IDENTIFIER DESCRIPTION

SUGGESTED LIST PRICE USD (\$)

Select One Code From Each Required Category

BASE MACHINE

136BXF

RT1273 - 73 In. Medium Duty Rotary Tiller Skid shoes in base. No Roller Option.

6,588.00

ATTACHMENTS FOR FIELD CONVERSION

Miscellaneous:

MHF20020376

French Kit - For RT1173, RT1181, RT2283, RT2283C, RT1273, and RT2293 Includes Operators Manual, Parts Catalog, and Safety Decals.

45.04

THIS PAGE IS INTENTIONALLY LEFT BLANK

Landscaping

RT2283 - 83 In. Medium Duty Rotary Tiller

Equipment for Base Machine

Working Width:
83 In. (210 cm)
Tractor PTO Speed: 540 RPM
Tractor PTO HP (Minimum):
60 HP (44kW)
Tractor PTO HP (Maximum):
100 HP (74 kW)
Blade Shape: L
Skid Shoes: Adjustable
Side Drive: Gear
Rear Door Support: Chain
Parking Stand Included
Gearbox Speed: Multi
Rotor Speed: 140-714-215
(Factory Setting)-266 RPM
Rotor Flanges: 9
Blades/Rotor: 6
Adjustable Lower Hitches
Max Working Depth:

10.6 In. (27 cm)
Outside to Outside Width:
88 In. (224 cm)
Driveline Protection: Friction Clutch
Tillage Depth Control: Skid Shoes,
Cage Roller Optional
Hitch: Category II,
Quick Coupler Compatible
Frame:
Double-Wall Frame Construction
Above Rotor for Strength and
Rock Protection

CODE	ATTACHMENT IDENTIFIER	DESCRIPTION	SUGGESTED LIST PRICE USD (\$)
		Select One Code From Each Required Category	
		BASE MACHINE	
1671XF		RT2283 - 83 In. Medium Duty Rotary Tiller Skid shoes in base. Roller Optional.	8,465.00
		TILLAGE DEPTH CONTROL	
1000		Skid Shoe	In Base Price
1010		Cage Roller Manual Adjustment	2,087.00
1020		Cage Roller Hydraulic Adjustment	2,305.00
		ATTACHMENTS - ORDER AS DESIRED	
8000		Right Disc For RT22, RT23, and RC22 Series. Also for RT310R.	774.00
8010		Left Disc For RT22, RT23, and RC22 Series. Also for RT310R.	774.00
		ATTACHMENTS FOR FIELD CONVERSION	

MHF20020376	Miscellaneous: French Kit - For RT1173, RT1181, RT2283, RT2283C, RT1273, and RT2293 Includes Operators Manual, Parts Catalog, and Safety Decals.	45.04
5MH99500264	Left Disc (RT22, RT23, RC22 Series and Also RT1310R)	835.92
5MH99500263	Right Disc (RT22, RT23, RC22 Series and Also RT1310R)	835.92

RT2283 - 83 In. Medium Duty Rotary Tiller Continued THIS PAGE IS INTENTIONALLY LEFT BLANK

Landscaping

RT2293 - 93 In. Medium Duty Rotary Tiller

Equipment for Base Machine

Working Width:
93 In. (235 cm)
Tractor PTO Speed: 540 RPM
Tractor PTO HP (Minimum):
70 HP (52 kW)
Tractor PTO HP (Maximum):
100 HP (74 kW)
Blade Shape: L
Skid Shoes: Adjustable
Side Drive: Gear
Rear Door Support: Chain
Parking Stand Included
Gearbox Speed: Multi
Rotor Speed: 140-174-215
(Factory Setting)-266 RPM
Rotor Flanges: 10
Blades/Rotor: 6
Adjustable Lower Hitches
Max Working Depth:

1672XF

10.6 In. (27 cm)
Outside to Outside Width:
98 In. (249 cm)
Driveline Protection: Friction Clutch
Tillage Depth Control: Skid Shoes,
Cage Roller Optional
Hitch: Category II,
Quick Coupler Compatible
Frame:
Double-Wall Frame Construction
Above Rotor for Strength and
Rock Protection

8,801.00

CODE	ATTACHMENT IDENTIFIER	DESCRIPTION	SUGGESTED LIST PRICE USD (\$)

Select One Code From Each Required Category

BASE MACHINE

RT2293 - 93 In. Medium Duty Rotary Tiller

Skid shoes in base. Roller Optional.

	TILLAGE DEPTH CONTROL	
1000	Skid Shoe	In Base Price
1010	Cage Roller Manual Adjustment	2,577.00
1020	Cage Roller Hydraulic Adjustment	2,670.00
	ATTACHMENTS - ORDER AS DESIRED	
8000	Right Disc For RT22, RT23, and RC22 Series. Also for RT310R.	774.00
8010	Left Disc For RT22, RT23, and RC22 Series. Also for RT310R.	774.00

ATTACHMENTS FOR FIELD CONVERSION

MHF20020376	Miscellaneous: French Kit - For RT1173, RT1181, RT2283, RT2283C, RT1273, and RT2293 Includes Operators Manual, Parts Catalog, and Safety Decals.	45.04
5MH99500264	Left Disc (RT22, RT23, RC22 Series and Also RT1310R)	835.92
5MH99500263	Right Disc (RT22, RT23, RC22 Series and Also RT1310R)	835.92

RT2293 - 93 In. Medium Duty Rotary Tiller Continued

THIS PAGE IS INTENTIONALLY LEFT BLANK	

Landscaping

RT2383 - 82 In. Heavy Duty Rotary Tiller

Equipment for Base Machine

Working Width:
82 In. (208 cm)
Tractor PTO Speed: 540 RPM
Tractor PTO HP (Minimum):
60 HP (44 kW)
Tractor PTO HP (Maximum):
130 HP (96 kW)
Blade Shape: L
Skid Shoes: Adjustable
Side Drive: Gear
Rear Door Support:
Metal Rod with Double Spring
Parking Stand Included
Gearbox Speed: Multi
Rotor Speed:
175-214-262 (Factory Setting)-143 RPM
Rotor Flanges: 9
Blades/Rotor: 6
Max Working Depth:

10.6 In. (27 cm)
Outside to Outside Width:
88 In. (224 cm)
Driveline Protection: Friction Clutch
Tillage Depth Control: Skid Shoes,
Cage Roller Optional
Hitch: Category II,
Quick Coupler Compatible
Frame:
Double-Wall Frame Construction
Above Rotor for Strength and
Rock Protection

			SUGGESTED
A	ATTACHMENT		LIST PRICE
CODE I	DENTIFIER	DESCRIPTION	USD (\$)

Select One Code From Each Required Category

BASE MACHINE

1683XF	RT2383 - 82 In. Heavy Duty Rotary Tiller	9,653.00
	TILLAGE DEPTH CONTROL	
1000	Skid Shoe	In Base Price
1010	Cage Roller Manual Adjustment	2,087.00
1020	Cage Roller Hydraulic Adjustment	2,305.00
	ATTACHMENTS - ORDER AS DESIRED	
8000	Right Disc For RT22, RT23, and RC22 Series. Also for RT310R.	774.00
8010	Left Disc For RT22, RT23, and RC22 Series. Also for RT310R.	774.00

ATTACHMENTS FOR FIELD CONVERSION

	ATTACHMENTO TON TIEED CONVENCION	
MHF20020454	Miscellaneous: French Kit - For RT2308, RT2383, and RT2310 Includes Operators Manual, Parts Catalog, and Safety Decals.	39.83
5MH99500264	Left Disc (RT22, RT23, RC22 Series and Also RT1310R)	835.92
5MH99500263	Right Disc (RT22, RT23, RC22 Series and Also RT1310R)	835.92

RT2383 - 82 In. Heavy Duty Rotary Tiller Continued

THIS PAGE IS INTENTIONALLY LEFT BLANK

Landscaping

RT2308 - 102 In. Heavy Duty Rotary Tiller

Equipment for Base Machine

Working Width:
 102 In. (260 cm)
Tractor PTO Speed: 540 RPM
Tractor PTO HP (Minimum):
 80 HP (59 kW)
Tractor PTO HP (Maximum):
 130 HP (96 kW)
Blade Shape: L
Skid Shoes: Adjustable
Side Drive: Gear
Rear Door Support:
 Metal Rod with Double Spring
Parking Stand Included
Gearbox Speed: Multi
Rotor Speed: 175-214-262
 (Factory Setting)-143 RPM
Rotor Flanges: 11
Blades/Rotor: 6
Max Working Depth:

5MH99500264

5MH99500263

10.6 In. (27 cm)
Outside to Outside Width:
108 In. (274 cm)
Driveline Protection: Friction Clutch
Tillage Depth Control: Skid Shoes,
Cage Roller Optional
Hitch: Category II,
Quick Coupler Compatible
Frame:
Double-Wall Frame Construction
Above Rotor for Strength and
Rock Protection

835.92

835.92

			SUGGESTED
	ATTACHMENT		LIST PRICE
CODE	IDENTIFIER	DESCRIPTION	USD (\$)

Select One Code From Each Required Category

BASE MACHINE 1681XF RT2308 - 102 In. Heavy Duty Rotary Tiller 10,734.00 Skid shoes in base. Roller Optional. TILLAGE DEPTH CONTROL 1000 Skid Shoe In Base Price 1010 2,452.00 Cage Roller Manual Adjustment 1020 Cage Roller Hydraulic Adjustment 2,806.00 ATTACHMENTS - ORDER AS DESIRED Right Disc 8000 774.00 For RT22, RT23, and RC22 Series. Also for RT310R. 8010 774.00 For RT22, RT23, and RC22 Series. Also for RT310R. 8020 Rotor Flange Reinforcement Kit 758.00 ATTACHMENTS FOR FIELD CONVERSION Miscellaneous: MHF20020454 French Kit - For RT2308, RT2383, and RT2310 39.83 Includes Operators Manual, Parts Catalog, and Safety Decals.

Left Disc (RT22, RT23, RC22 Series and Also RT1310R)

Right Disc (RT22, RT23, RC22 Series and Also RT1310R)

Landscaping

RT2308 - 102 In. Heavy Duty Rotary Tiller Continued

CODE	ATTACHMENT IDENTIFIER	DESCRIPTION	SUGGESTED LIST PRICE USD (\$)
	5MH99525575	ATTACHMENTS FOR FIELD CONVERSIONContinued Rotor Flance Reinforcement Kit (RT2308)	818 64

Landscaping

RT2310 - 121 In. Heavy Duty Rotary Tiller

Equipment for Base Machine

Working Width:
 121 In. (310 cm)
Tractor PTO Speed: 540 RPM
Tractor PTO HP (Minimum):
 100 HP (75 kW)
Tractor PTO HP (Maximum):
 130 HP (96 kW)
Blade Shape: L
Skid Shoes: Adjustable
Side Drive: Gear
Rear Door Support:
 Metal Rod with Double Spring
Parking Stand Included
Gearbox Speed: Multi
Rotor Speed: 175-214-262
 (Factory Setting)-143 RPM
Rotor Flanges: 13
Blades/Rotor: 6
Max Working Depth:

10.6 In. (27 cm)
Outside to Outside Width:
128 In. (325 cm)
Driveline Protection: Friction Clutch
Tillage Depth Control: Skid Shoes,
Cage Roller Optional
Hitch: Category II,
Quick Coupler Compatible
Frame:
Double-Wall Frame Construction
Above Rotor for Strength and
Rock Protection

			SUGGESTED
	ATTACHMENT		LIST PRICE
CODE	IDENTIFIER	DESCRIPTION	USD (\$)

Select One Code From Each Required Category

		BASE MACHINE	
1682XF		RT2310 - 121 In. Heavy Duty Rotary Tiller Skid shoes in base. Roller Optional.	12,151.00
		TILLAGE DEPTH CONTROL	
1000		Skid Shoe	In Base Price
1010		Cage Roller Manual Adjustment	2,765.00
1020		Cage Roller Hydraulic Adjustment	3,136.00
		ATTACHMENTS - ORDER AS DESIRED	
8000		Right Disc For RT22, RT23, and RC22 Series. Also for RT310R.	774.00
8010		Left Disc For RT22, RT23, and RC22 Series. Also for RT310R.	774.00
8020		Rotor Flange Reinforcement Kit	959.00
		ATTACHMENTS FOR FIELD CONVERSION	
	MHF20020454	Miscellaneous: French Kit - For RT2308, RT2383, and RT2310 Includes Operators Manual, Parts Catalog, and Safety Decals.	39.83
	5MH99500264	Left Disc (RT22, RT23, RC22 Series and Also RT1310R)	835.92
	5MH99500263	Right Disc (RT22, RT23, RC22 Series and Also RT1310R)	835.92

RT2310 - 121 In. Heavy Duty Rotary Tiller Continued

Landscaping

SP2048B - 4 Ft. Standard Duty Soil Pulverizer - Bar Type

Equipment for Base Machine

3-Point Hitch: Category I
Working Width: 48 In.
Tractor HP (Maximum): 30 to 45 HP
Approximate Shipping Weight: 550 lbs.
Scarifying Teeth - Rear:
 (8) 1/2 In x 2 In. Bar Type
Scarifying Teeth - Front:
 (9) 1/2 In. x 2 In. Bar Type
Roller Pins: 70
Roller Pin Size: 3/8 In. x 1 In.
Roller Diameter: 5-9/16 In.
Height: 39 In.
H-Beam Dimensions: 10 In. x 10 In.

Duty: Standard Duty Compression Springs: (2) 160 lbs. Assembly/Set-Up Time: 10 Minutes (Approximate) Approximate Operating Weight: 496 lbs. 2nd Roller Assembly 48 In.: Optional

			SUGGESTED
	ATTACHMENT	Γ	LIST PRICE
CODE	IDENTIFIER	DESCRIPTION	USD (\$)

Select One Code From Each Required Category

BASE MACHINE

1401XF	SP2048B - 4 Ft. Standard Duty Soil Pulverizer - Bar Type	2,188.00
	ATTACHMENTS ORDER AS DESIRED	
9000	Second Roller Assembly (SP2048B) 5 In. diameter.	384.00

ATTACHMENTS FOR FIELD CONVERSION

Miscellaneous:

5BP0099887 Second Roller Assembly (SP2048B) 414.72

5 In. diameter.

SP2048B - 4 Ft. Standard Duty Soil Pulverizer - Bar Type Continued THIS PAGE IS INTENTIONALLY LEFT BLANK

Landscaping

SP2060B - 5 Ft. Standard Duty Soil Pulverizer - Bar Type

Equipment for Base Machine

3-Point Hitch: Category I Working Width: 60 In. working Width: 60 In.
Tractor HP (Maximum): 30 to 45 HP
Approximate Shipping Weight: 702 lbs.
Scarifying Teeth - Rear:
(10) 1/2 In. x 2 In. Bar Type
Scarifying Teeth - Front:
(11) 1/2 In. x 2 In. Bar Type
Roller Pins: 88
Roller Pin Size: 3/8 In. x 1 In. Roller Pin Size: 3/8 In. x 1 In. Roller Diameter: 5-9/16 In. Height: 39 In. H-Beam Dimensions: 10 In. x 10 In.

Duty: Standard Duty Compression Springs: (2) 160 lbs. Assembly/Set-Up Time: 10 Minutes (Approximate)
Approximate Operating Weight: 652 lbs.
2nd Roller Assembly 60 In.: Optional

			SUGGESTED
	ATTACHMENT		LIST PRICE
CODE	IDENTIFIER	DESCRIPTION	USD (\$)

Select One Code From Each Required Category

BASE MACHINE

1403XF	SP2060B - 5 Ft. Standard Duty Soil Pulverizer - Bar Type	2,292.00
	ATTACHMENTS ORDER AS DESIRED	
9000	Second Roller Assembly (SP2060B) 5 In. diameter.	478.00

ATTACHMENTS FOR FIELD CONVERSION

Miscellaneous:

5BP0099636 Second Roller Assembly (SP2060B) 516.24

5 In. diameter.

SP2060B - 5 Ft. Standard Duty Soil Pulverizer - Bar Type Continued THIS PAGE IS INTENTIONALLY LEFT BLANK

Landscaping

SP2072B - 6 Ft. Standard Duty Soil Pulverizer - Bar Type

Equipment for Base Machine

3-Point Hitch: Category I Working Width: 72 In. working Width: 72 In.
Tractor HP (Maximum): 30 to 45 HP
Approximate Shipping Weight: 729 lbs.
Scarifying Teeth - Rear:
(12) 1/2 In. x 2 In. Bar Type
Scarifying Teeth - Front:
(13) 1/2 In. x 2 In. Bar Type
Roller Pins: 106
Roller Pin Size: 3/8 In. x 1 In Roller Pin Size: 3/8 In. x 1 In. Roller Diameter: 5-9/16 In. Height: 39 In. H-Beam Dimensions: 10 In. x 10 In.

Duty: Standard Duty Compression Springs: (2) 160 lbs. Assembly/Set-Up Time: 10 Minutes (Approximate)
Approximate Operating Weight: 679 lbs.
2nd Roller Assembly 72 In.: Optional

			SUGGESTED
	ATTACHMENT		LIST PRICE
CODE	IDENTIFIER	DESCRIPTION	USD (\$)

Select One Code From Each Required Category

BASE MACHINE

1402XF	SP2072B - 6 Ft. Standard Duty Soil Pulverizer - Bar Type	2,419.00
	ATTACHMENTS ORDER AS DESIRED	

9000 Second Roller Assembly (SP2072B) 678.00 5 In. diameter.

ATTACHMENTS FOR FIELD CONVERSION

Miscellaneous:

5BP0099637 Second Roller Assembly (SP2072B) 732.24

5 In. diameter.

SP2072B - 6 Ft. Standard Duty Soil Pulverizer - Bar Type Continued THIS PAGE IS INTENTIONALLY LEFT BLANK

Landscaping

SP2272B - 6 Ft. Heavy Duty Soil Pulverizer - Bar Type

Equipment for Base Machine

3-Point Hitch: Category I
Working Width: 72 In.
Tractor HP (Maximum): 30 to 70 HP
Shipping Weight: 846 lbs.
Scarifying Teeth - Rear:
 (12) 1/2 In. x 2 In. Bar Type
Scarifying Teeth - Front:
 (13) 1/2 In. x 2 In. Bar Type
Roller Pins: 106
Roller Pin Size: 3/8 In. x 1 In.
Roller Diameter: 6-5/8 In.
Height: 39 In.
H-Beam Dimensions: 12 In. x 11.5 In.

Duty: Heavy Duty Compression Springs: (2) 160 lbs. Assembly/Set-Up Time: 10 Minutes (Approximate) Approximate Operating Weight: 781 lbs. 2nd Roller Assembly 72 In.: Optional

			SUGGESTED
	ATTACHMENT		LIST PRICE
CODE	IDENTIFIER	DESCRIPTION	USD (\$)

Select One Code From Each Required Category

BASE MACHINE

1411XF	SP2272B - 6 Ft. Heavy Duty Soil Pulverizer - Bar Type	2,978.00
	ATTACHMENTS ORDER AS DESIRED	
9000	Second Roller Assembly (SP2272B) 5-9/16 In. diameter.	863.00

ATTACHMENTS FOR FIELD CONVERSION

Miscellaneous:

5BP0099646 Second Roller Assembly (SP2272B) 932.04 5-9/16 In. diameter.

SP2272B - 6 Ft. Heavy Duty Soil Pulverizer - Bar Type Continued

THIS PAGE IS INTENTIONALLY LEFT BLANK

Landscaping

SP2284B - 7 Ft. Heavy Duty Soil Pulverizer - Bar Type

Equipment for Base Machine

3-Point Hitch: Category I Working Width: 84 In. Tractor HP (Maximum): 30 to 70 HP Shipping Weight: 940 lbs. Scarifying Teeth - Rear:
(14) 1/2 In. x 2 In. Bar Type
Scarifying Teeth - Front:
(15) 1/2 In. x 2 In. Bar Type
Roller Pins: 124
Pollor Pin Sizo: 2/9 Terms 1 Type Roller Pin Size: 3/8 In. x 1 In. Roller Diameter: 6-5/8 In. Height: 39 In. H-Beam Dimensions: 12 In. x 11.5 In.

Duty: Heavy Duty Compression Springs: (2) 160 lbs. Assembly/Set-Up Time: 10 Minutes (Approximate)
Approximate Operating Weight: 875 lbs.
2nd Roller Assembly 84 In.: Optional

			SUGGESTED
	ATTACHMENT		LIST PRICE
CODE	IDENTIFIER	DESCRIPTION	USD (\$)

Select One Code From Each Required Category

BASE MACHINE

1412XF SP2284B - 7 Ft. Heavy Duty Soil Pulverizer - Bar Type 3,182.00

ATTACHMENTS ORDER AS DESIRED

9000 Second Roller Assembly (SP2284B) 923.00 5-9/16 In. diameter.

ATTACHMENTS FOR FIELD CONVERSION

Miscellaneous:

5BP0099647 Second Roller Assembly (SP2284B) 996.84

5-9/16 In. diameter.

SP2284B - 7 Ft. Heavy Duty Soil Pulverizer - Bar Type Continued

THIS PAGE IS INTENTIONALLY LEFT BLANK

Landscaping

SS1022B Broadcast Spreader - Pull Type Hitch

Equipment for Base Machine

Hopper Material: Steel
Hopper Weight Capacity: 226 lbs.
Hopper Volume Capacity: 3.5 Cubic Ft.
Machine Weight: 62 lbs.
Shipping Weight (Per Pair): 200 lbs.
Swath Spread: 20 Ft.
Hopper Width: 32 In.
Hopper Height: 39.6 In.
Tractor PTO HP Range: 16-30 HP
PTO RPM: NA (Ground Driven)
PTO Shaft Category (Heavy Duty

Shielded 1-3/8 In.): NA (Ground Driven)
3-Point Hitch Category: Single Point
iMatch Compatible Note: Must be Ordered from
Factory as iMatch: NA
(Single Point Hitch) iMatch Compatible: No

CODE	ATTACHMENT IDENTIFIER	DESCRIPTION	SUGGESTED LIST PRICE USD (\$)
		Select One Code From Each Required Category	
		BASE MACHINE	
3061XF		SS1022B Broadcast Spreader - Pull Type Hitch 226 lb. capacity. Order in multiples of two.	763.00
		ATTACHMENTS ORDER AS DESIRED	
9010		Hopper Cover For SS1022B and SS1023B.	237.00
9070		Deflector Shield For SS1022B, and SS1035B.	95.00
9080		Remote Gate Control For SS1022B, SS1023B, and SS1035B.	337.00
		ATTACHMENTS FOR FIELD CONVERSION	
	5BPAA1120	Miscellaneous: Deflector Shield (SS1022B/SS1035B)	106.40
	5BP0099720	Hopper Cover (SS1022B/SS1023B)	255.96
	5BP0099856	Remote Gate Control (SS1022B/SS1023B/SS1035B)	363.96

SS1022B Broadcast Spreader - Pull Type Hitch Continued THIS PAGE IS INTENTIONALLY LEFT BLANK

Landscaping

SS1023B Broadcast Spreader - 3-Point PTO Category I Non-iMatch

Equipment for Base Machine

Hopper Material: Steel
Hopper Weight Capacity: 226 lbs.
Hopper Volume Capacity: 3.5 Cubic Ft.
Machine Weight: 81 lbs. Shipping Weight (Per Pair): 232 lbs. Swath Spread: 23 Ft. Hopper Width: 32 In. Hopper Height: 31 In.

Shielded 1-3/8 In.) 3-Point Hitch: Category 0 and I iMatch Compatible Note: Must be Ordered from Factory as iMatch: NA (Single Point Hitch) iMatch Compatible: No

85.12

Tractor PTO HP Range: 16-30 HP PTO RPM: 540 RPM PTO Shaft Category I (Heavy Duty

5BP0099979

			SUGGESTED
	ATTACHMENT		LIST PRICE
CODE	IDENTIFIER	DESCRIPTION	USD (\$)

Select One Code From Each Required Category

DACE MACHINE

Tumbling Style Wheel Agitator (SS1023B)

		BASE MACHINE	
3062XF		SS1023B Broadcast Spreader - 3-Point PTO Category I Non-iMatch 226 lb. capacity. Order in multiples of two.	755.00
		ATTACHMENTS ORDER AS DESIRED	
9010		Hopper Cover For SS1022B and SS1023B.	237.00
9070		Deflector Shield For SS1023B, SS1036B and SS2036B.	97.00
9080		Remote Gate Control For SS1022B, SS1023B, and SS1035B.	337.00
9090		Tumbling Wheel Agitator (SS1023B) For SS1023B.	76.00
		ATTACHMENTS FOR FIELD CONVERSION	
	5BP0099524	Miscellaneous: Deflector Shield (SS1023B/SS1036B/SS2036B)	108.64
	5BP0099720	Hopper Cover (SS1022B/SS1023B)	255.96
	5BP0099856	Remote Gate Control (SS1022B/SS1023B/SS1035B)	363.96

SS1023B Broadcast Spreader - 3-Point PTO Category I Non-iMatch Continued THIS PAGE IS INTENTIONALLY LEFT BLANK

Landscaping

SS1035B Broadcast Spreader - Pull Type Hitch

Equipment for Base Machine

Hopper Material: Steel
Hopper Weight Capacity: 362 lbs.
Hopper Volume Capacity: 5.6 Cubic Ft.
Machine Weight: 84 lbs.
Shipping Weight (Per Pair): 250 lbs.
Swath Spread: 20 Ft.
Hopper Width: 35 In.
Hopper Height: 45 In.
Tractor PTO HP Range: 16-45 HP
PTO RPM: NA (Ground Driven)
PTO Shaft Category (Heavy Duty

Shielded 1-3/8 In.): NA (Ground Driven)
3-Point Hitch Category: NA (Single Point Hitch)
iMatch Compatible Note: Must be Ordered from
Factory as iMatch: NA
(Single Point Hitch) iMatch Compatible: No

CODE	ATTACHMENT IDENTIFIER	DESCRIPTION	SUGGESTED LIST PRICE USD (\$)
		Select One Code From Each Required Category	
		BASE MACHINE	
3068XF		SS1035B Broadcast Spreader - Pull Type Hitch 362 lb. capacity. Order in multiples of two.	1,023.00
		ATTACHMENTS ORDER AS DESIRED	
9010		Hopper Cover For SS1035B, SS1036B, and SS2036B.	247.00
9070		Deflector Shield For SS1022B, and SS1035B.	95.00
9080		Remote Gate Control For SS1022B, SS1023B, and SS1035B.	337.00
		ATTACHMENTS FOR FIELD CONVERSION	
	5BPAA1120	Miscellaneous: Deflector Shield (SS1022B/SS1035B)	106.40
	5BP0099721	Hopper Cover (SS1035B/SS1036B/SS2036B)	266.76
	5BP0099856	Remote Gate Control (SS1022B/SS1023B/SS1035B)	363.96

SS1035B Broadcast Spreader - Pull Type Hitch Continued THIS PAGE IS INTENTIONALLY LEFT BLANK

Landscaping

SS1036B Broadcast Spreader - 3-Point PTO Category I Non-iMatch

Equipment for Base Machine

Hopper Material: Steel
Hopper Weight Capacity: 362 lbs.
Hopper Volume Capacity: 5.6 Cubic Ft.
Machine Weight: 102 lbs.
Shipping Weight (Per Pair): 290 lbs.
Swath Spread: 23 Ft.
Hopper Width: 35 In.
Hopper Height: 34 In.
Tractor PTO HP Range: 16-45 HP Tractor PTO HP Range: 16-45 HP PTO RPM: 540 RPM

PTO Shaft Category I (Heavy Duty

5BP0099850

5BP0099978

Shielded 1-3/8 In.) 3-Point Hitch: Category 0 and I iMatch Compatible Note: Must be Ordered from Factory as iMatch: No (Single Point hitch) iMatch Compatible: No

363.96

85.12

			SUGGESTED
	ATTACHMENT		LIST PRICE
CODE	IDENTIFIER	DESCRIPTION	USD (\$)

Select One Code From Each Required Category

BASE MACHINE

3069XF		SS1036B Broadcast Spreader - 3-Point PTO Category I Non-iMatch 362 lb. capacity. Order in multiples of two.	790.00
		ATTACUMENTS ORDER AS DESIDED	
9010		ATTACHMENTS ORDER AS DESIRED Hopper Cover For SS1035B, SS1036B, and SS2036B.	247.00
9070		Deflector Shield For SS1023B, SS1036B and SS2036B.	97.00
9080		Remote Gate Control For SS1036B, SS2036B, SS1067B, and SS2067B.	337.00
9090		Tumbling Wheel Agitator (SS1023B) For SS1036B, SS2036B, SS1067B, and SS2067B.	76.00
		ATTACHMENTS FOR FIELD CONVERSION	
	5BP0099524	Miscellaneous: Deflector Shield (SS1023B/SS1036B/SS2036B)	108.64
	5BP0099721	Hopper Cover (SS1035B/SS1036B/SS2036B)	266.76

Remote Gate Control (SS1036B/SS2036B/SS1067B/SS2067B)

Tumbling Style Wheel Agitator (SS1036B/SS2036B/SS1067B/SS2067B)

SS1036B Broadcast Spreader - 3-Point PTO Category I Non-iMatch Continued THIS PAGE IS INTENTIONALLY LEFT BLANK

Landscaping

SS1067B Broadcast Spreader - 3-Point PTO Category I

Equipment for Base Machine

Hopper Material: Steel
Hopper Weight Capacity: 678 lbs.
Hopper Volume Capacity: 10.6 Cubic Ft.
Machine Weight: 125 lbs.
Shipping Weight (Per Pair): 320 lbs.
Swath Spread: 46 Ft.
Hopper Width: 42 In.
Hopper Height: 40 In.
Tractor PTO HP Range: 16-55 HP
PTO RPM: 540 RPM
PTO Shaft Category I (Heavy Duty

5BP0099722

5BP0099850

Shielded 1-3/8 In.)
3-Point Hitch: Category I
iMatch Compatible (Note: Must be Ordered
from Factory as iMatch): Optional

SUGGESTED

273.24

363.96

CODE	ATTACHMENT IDENTIFIER	T DESCRIPTION	LIST PRICE USD (\$)
		Select One Code From Each Required Category]
		BASE MACHINE	
3063XF		SS1067B Broadcast Spreader - 3-Point PTO Category I 678 lb. capacity. Order in multiples of two.	858.00
		iMATCH COMPATIBILITY	
1000		iMatch Compatible Leave quantity blank. The system will automatically populate the correct quantity.	9.00
1010		Non-iMatch Compatible Leave quantity blank. The system will automatically populate the correct quantity.	In Base Price
		ATTACHMENTS ORDER AS DESIRED	
9010		Hopper Cover For SS1067B and SS2067B.	253.00
9070		Deflector Shield For SS1067B, and SS2067B.	184.00
9080		Remote Gate Control For SS1036B, SS2036B, SS1067B, and SS2067B.	337.00
9090		Tumbling Wheel Agitator (SS1023B) For SS1036B, SS2036B, SS1067B, and SS2067B.	76.00
9100		Siderow Discharge (SS1067B and SS2067B)	391.00
		ATTACHMENTS FOR FIELD CONVERSION	
	5BP0099638	Miscellaneous: Deflector Shield (SS1067B/SS2067B)	198.72

Hopper Cover (SS1067B/SS2067B, and SS1079P with 9 Ft. Hopper)

Remote Gate Control (SS1036B/SS2036B/SS1067B/SS2067B)

Landscaping

SS1067B Broadcast Spreader - 3-Point PTO Category I Continued

CODE	ATTACHMENT IDENTIFIER	DESCRIPTION	SUGGESTED LIST PRICE USD (\$)
	5BPAA4120	ATTACHMENTS FOR FIELD CONVERSIONContinued Siderow Discharge (SS1067B/SS2067B)	422.28
	5BP0099978	Tumbling Style Wheel Agitator (SS1036B/SS2036B/SS1067B/SS2067B)	85.12

Landscaping

SS2036B Broadcast Spreader - Poly Hopper - 3-Point PTO Category I Non-iMatch

Equipment for Base Machine

Hopper Material: Polyethylene
Hopper Weight Capacity: 362 lbs.
Hopper Volume Capacity: 5.6 Cubic Ft.
Machine Weight: 102 lbs.
Shipping Weight (Per Pair): 290 lbs.
Swath Spread: 23 Ft.
Hopper Width: 35 In.
Hopper Height: 34 In.
Tractor PTO HP Range: 16-45 HP
PTO RPM: 540 RPM
PTO Shaft Category I (Heavy Duty

Shielded 1-3/8 In.)
3-Point Hitch: Category 0 and I
iMatch Compatible Note: Must be Ordered from
Factory as iMatch: No
(Single Point hitch) iMatch Compatible: No

			SUGGESTED
	ATTACHMEN1	-	LIST PRICE
CODE	IDENTIFIER	DESCRIPTION	USD (\$)

Select One Code From Each Required Category

BASE MACHINE

		BASE MACHINE	
3071XF		SS2036B Broadcast Spreader - Poly Hopper - 3-Point PTO Category I Non-iMatch Stainless steel bottom and nylon spreading disc. 362 lb. capacity. Order in multiples of two.	1,023.00
		ATTACHMENTS ORDER AS DESIRED	
9010		Hopper Cover For SS1035B, SS1036B, and SS2036B.	247.00
9070		Deflector Shield For SS1023B, SS1036B and SS2036B.	97.00
9080		Remote Gate Control For SS1036B, SS2036B, SS1067B, and SS2067B.	337.00
9090		Tumbling Wheel Agitator (SS1023B) For SS1036B, SS2036B, SS1067B, and SS2067B.	76.00
		ATTACHMENTS FOR FIELD CONVERSION	
	5BP0099524	Miscellaneous: Deflector Shield (SS1023B/SS1036B/SS2036B)	108.64
	5BP0099721	Hopper Cover (SS1035B/SS1036B/SS2036B)	266.76
	5BP0099850	Remote Gate Control (SS1036B/SS2036B/SS1067B/SS2067B)	363.96
	5BP0099978	Tumbling Style Wheel Agitator (SS1036B/SS2036B/SS1067B/SS2067B)	85.12

SS2036B Broadcast Spreader - Poly Hopper - 3-Point PTO Category I Non-iMatch Continued THIS PAGE IS INTENTIONALLY LEFT BLANK

Landscaping

SS2067B Broadcast Spreader - Poly Hopper - 3-Point PTO Category I

Equipment for Base Machine

Hopper Material: Polyethylene
Hopper Weight Capacity: 678 lbs.
Hopper Volume Capacity: 10.6 Cubic Ft.
Machine Weight: 125 lbs.
Shipping Weight (Per Pair): 320 lbs.
Swath Spread: 46 Ft.
Hopper Width: 42 In.
Hopper Height: 40 In.
Tractor PTO HP Range: 16-55 HP
PTO RPM: 540 RPM
PTO Shaft Category I (Heavy Duty

PTO Shaft Category I (Heavy Duty

Shielded 1-3/8 In.)
3-Point Hitch: Category 1
iMatch Compatible (Note: Must be Ordered from Factory as iMatch): Optional

CODE	ATTACHMENT IDENTIFIER	DESCRIPTION	SUGGESTED LIST PRICE USD (\$)
		Select One Code From Each Required Category	
		BASE MACHINE	
3072XF		SS2067B Broadcast Spreader - Poly Hopper - 3-Point PTO Category I Stainless steel bottom and spreading disc. 678 lb. capacity. Order in multiples of two.	1,330.00
		IMATCH COMPATIBILITY	
1000		iMatch Compatible Leave quantity blank. The system will automatically populate the correct quantity.	9.00
1010		Non-iMatch Compatible Leave quantity blank. The system will automatically populate the correct quantity.	In Base Price
		ATTACHMENTS ORDER AS DESIRED	
9010		Hopper Cover For SS1067B and SS2067B.	253.00
9070		Deflector Shield For SS1067B, and SS2067B.	184.00
9080		Remote Gate Control For SS1036B, SS2036B, SS1067B, and SS2067B.	337.00
9090		Tumbling Wheel Agitator (SS1023B) For SS1036B, SS2036B, SS1067B, and SS2067B.	76.00
9100		Siderow Discharge (SS1067B and SS2067B)	391.00
		ATTACHMENTS FOR FIELD CONVERSION	
	5BP0099638	Miscellaneous: Deflector Shield (SS1067B/SS2067B)	198.72
	5BP0099722	Hopper Cover (SS1067B/SS2067B, and SS1079P with 9 Ft. Hopper)	273.24
	5BP0099850	Remote Gate Control (SS1036B/SS2036B/SS1067B/SS2067B)	363.96

Landscaping

SS2067B Broadcast Spreader - Poly Hopper - 3-Point PTO Category I Continued

	TACHMENT ENTIFIER	DESCRIPTION	SUGGESTED LIST PRICE USD (\$)
5BF		ATTACHMENTS FOR FIELD CONVERSIONContinued Siderow Discharge (SS1067B/SS2067B)	422.28
5BF	P0099978 -	Tumbling Style Wheel Agitator (SS1036B/SS2036B/SS1067B/SS2067B)	85.12

Landscaping

SS1079P Pendular Spreader - 3-Point PTO Category I

Equipment for Base Machine

Hopper Weight Capacity: 576 or 820 lbs.
Hopper Volume Capacity: 9 Cubic Ft. or 12.8 Cubic

3-Point Hitch: Category I iMatch Compatible: Yes

Machine Weight: 250 lbs.
Swath Spread Range: 17-47 Ft.
Load Height: 43 In.
Tractor HP Range: 20-60 HP
PTO RPM: 540 RPM

CODE	ATTACHMENT IDENTIFIER	DESCRIPTION	SUGGESTED LIST PRICE USD (\$)
		Select One Code From Each Required Category	
		BASE MACHINE	
3064XF		SS1079P Pendular Spreader - 3-Point PTO Category I	2,691.00
		HOPPER SIZE	
6900		9 Cu. Ft. Hopper (SS1079P)	In Base Price
6912		12.8 Cu. Ft. Hopper (SS1079P)	338.00
		ATTACHMENTS ORDER AS DESIRED	
9551		Hopper Cover (SS1079P with 9 Ft. Hopper)	253.00
9550		Hopper Cover (SS1079P with 12 Ft. Hopper)	262.00
9000		Agitator Extension For SS1079P.	174.00
9020		Salt and Sand Spout (SS1079P, SS1116P, SS1180P and SS1220P)	299.00
9030		Rubber Insert (SS1079P, SS1116P, SS1180P and SS1220P)	107.00
9040		L/R Direct Att (SS1079P, SS1116P, SS1180P and SS1220P)	72.00
9110		Lock Nut for Spout (SS1079P, SS1116P, SS1180P, SS1220P)	48.00
9050		Hydraulic Gate Control (SS1079P, SS1116P, SS1180P and SS1220P)	672.00
9060		Filter Grate For SS1079P.	462.00
		ATTACHMENTS FOR FIELD CONVERSION	
	5BP0099453	Miscellaneous: Agitator Extension (SS1079P)	183.11
	5BP0099913	Filter Grate (SS1079P)	485.82
	5BP0099722	Hopper Cover (SS1067B/SS2067B, and SS1079P with 9 Ft. Hopper)	273.24

Landscaping

SS1079P Pendular Spreader - 3-Point PTO Category I Continued

CODE	ATTACHMENT IDENTIFIER	DESCRIPTION	SUGGESTED LIST PRICE USD (\$)
	5BP0099723	ATTACHMENTS FOR FIELD CONVERSIONContinued Hopper Cover (SS1079P with 12 Ft. Hopper)	276.54
	5BP0099456	Hydraulic Gate Control (SS1079P)	725.76
	5BP0095370	Left/Right Directional Attachment	80.64
	5BP0014984	Lock Nut for Spout (SS1079P, SS1116P, SS1180P, SS1220P)	53.76
	5BP0099451	Rubber Insert	119.84
	5BP0099452	Salt and Sand Spout	322.92

Landscaping

SS1116P Pendular Spreader - 3-Point PTO Category I or II

Equipment for Base Machine

Hopper Weight Capacity: 1168 lbs.
Hopper Volume Capacity: 22.5 Cubic Ft.
Machine Weight: 321 lbs.
Swath Spread Range: 17-47 Ft.
Load Height: 38 In.
Tractor HP Range: 20-60 HP
PTO RPM: 540 RPM
Three Point Hitch: Category I or II

iMatch Compatible: No

SUGGESTED

CODE	ATTACHMENT IDENTIFIER	DESCRIPTION	SUGGESTED LIST PRICE USD (\$)
		Select One Code From Each Required Category	
		BASE MACHINE	
3065XF		SS1116P Pendular Spreader - 3-Point PTO Category I or II 1168 lb. capacity.	3,598.00
		ATTACHMENTS ORDER AS DESIRED	
9000		Agitator Extension For SS1116P, SS1180P, and SS1220P.	174.00
9010		Hopper Cover For SS1116P.	304.00
9020		Salt and Sand Spout (SS1079P, SS1116P, SS1180P and SS1220P)	299.00
9030		Rubber Insert (SS1079P, SS1116P, SS1180P and SS1220P)	107.00
9040		L/R Direct Att (SS1079P, SS1116P, SS1180P and SS1220P)	72.00
9050		Hydraulic Gate Control (SS1079P, SS1116P, SS1180P and SS1220P)	672.00
9060		Filter Grate For SS1116P, SS1180P, and SS1220P.	417.00
9110		Lock Nut for Spout (SS1079P, SS1116P, SS1180P, SS1220P)	48.00
		ATTACHMENTS FOR FIELD CONVERSION	
	5BP0099454	Miscellaneous: Agitator Extension (SS1116P/SS1180P/SS1220P)	187.92
	5BP0095410	Filter Grill (SS1116P/SS1180P/SS1220P)	450.36
	5BP0099725	Hopper Cover (SS1116P)	328.32
	5BP0099455	Hydraulic Control (SS1116P/SS1180P/SS1220P)	866.16
	5BP0095370	Left/Right Directional Attachment	80.64
	5BP0014984	Lock Nut for Spout (SS1079P, SS1116P, SS1180P, SS1220P)	53.76

Landscaping

SS1116P Pendular Spreader - 3-Point PTO Category I or II Continued

CODE	ATTACHMEN'	T DESCRIPTION	SUGGESTED LIST PRICE USD (\$)
	5BP0099451	ATTACHMENTS FOR FIELD CONVERSIONContinued Rubber Insert	119.84
	5BP0099452	Salt and Sand Spout	322.92

Landscaping

SS1180P Pendular Spreader - 3-Point PTO Category I or II

Equipment for Base Machine

Hopper Weight Capacity: 1808 lbs.
Hopper Volume Capacity: 34.7 Cubic Ft.
Machine Weight: 339 lbs.
Swath Spread Range: 17-47 Ft.
Load Height: 43 In.
Tractor HP Range: 20-60 HP
PTO RPM: 540 RPM
Three Point Hitch: Category I or II

iMatch Compatible: No

SUGGESTED

CODE	ATTACHMENT IDENTIFIER	DESCRIPTION	LIST PRICE USD (\$)
		Select One Code From Each Required Category	
		BASE MACHINE	
3066XF		SS1180P Pendular Spreader - 3-Point PTO Category I or II 1808 lb. capacity.	4,162.00
		ATTACHMENTS ORDER AS DESIRED	
9000		Agitator Extension For SS1116P, SS1180P, and SS1220P.	174.00
9010		Hopper Cover For SS1180P.	312.00
9020		Salt and Sand Spout (SS1079P, SS1116P, SS1180P and SS1220P)	299.00
9030		Rubber Insert (SS1079P, SS1116P, SS1180P and SS1220P)	107.00
9040		L/R Direct Att (SS1079P, SS1116P, SS1180P and SS1220P)	72.00
9050		Hydraulic Gate Control (SS1079P, SS1116P, SS1180P and SS1220P)	672.00
9060		Filter Grate For SS1116P, SS1180P, and SS1220P.	417.00
9110		Lock Nut for Spout (SS1079P, SS1116P, SS1180P, SS1220P)	48.00
		ATTACHMENTS FOR FIELD CONVERSION	
	5BP0099454	Miscellaneous: Agitator Extension (SS1116P/SS1180P/SS1220P)	187.92
	5BP0095410	Filter Grill (SS1116P/SS1180P/SS1220P)	450.36
	5BP0099726	Hopper Cover (SS1180P)	336.96
	5BP0099455	Hydraulic Control (SS1116P/SS1180P/SS1220P)	866.16
	5BP0095370	Left/Right Directional Attachment	80.64
	5BP0014984	Lock Nut for Spout (SS1079P, SS1116P, SS1180P, SS1220P)	53.76

Landscaping

SS1180P Pendular Spreader - 3-Point PTO Category I or II Continued

CODE	ATTACHMEN'	T DESCRIPTION	SUGGESTED LIST PRICE USD (\$)
	5BP0099451	ATTACHMENTS FOR FIELD CONVERSIONContinued Rubber Insert	119.84
	5BP0099452	Salt and Sand Spout	322.92

Landscaping

SS1220P Pendular Spreader - 3-Point PTO Category I or II

Equipment for Base Machine

Hopper Weight Capacity: 2205 lbs.
Hopper Volume Capacity: 42.4 Cubic Ft.
Machine Weight: 343 lbs.
Swath Spread Range: 17-47 Ft.
Load Height: 47 In.
Tractor HP Range: 20-60 HP
PTO RPM: 540 RPM
Three Point Hitch: Category I or II

iMatch Compatible: No

SUGGESTED

CODE	ATTACHMENT IDENTIFIER	DESCRIPTION	SUGGESTED LIST PRICE USD (\$)
		Select One Code From Each Required Category	
		BASE MACHINE	
3067XF		SS1220P Pendular Spreader - 3-Point PTO Category I or II 2205 lb. capacity.	4,592.00
		ATTACHMENTS ORDER AS DESIRED	
9000		Agitator Extension For SS1116P, SS1180P, and SS1220P.	174.00
9010		Hopper Cover For SS1120P.	327.00
9020		Salt and Sand Spout (SS1079P, SS1116P, SS1180P and SS1220P)	299.00
9030		Rubber Insert (SS1079P, SS1116P, SS1180P and SS1220P)	107.00
9040		L/R Direct Att (SS1079P, SS1116P, SS1180P and SS1220P)	72.00
9050		Hydraulic Gate Control (SS1079P, SS1116P, SS1180P and SS1220P)	672.00
9060		Filter Grate For SS1116P, SS1180P, and SS1220P.	417.00
9110		Lock Nut for Spout (SS1079P, SS1116P, SS1180P, SS1220P)	48.00
		ATTACHMENTS FOR FIELD CONVERSION	
	5BP0099454	Miscellaneous: Agitator Extension (SS1116P/SS1180P/SS1220P)	187.92
	5BP0095410	Filter Grill (SS1116P/SS1180P/SS1220P)	450.36
	5BP0099727	Hopper Cover (SS1220P)	353.16
	5BP0099455	Hydraulic Control (SS1116P/SS1180P/SS1220P)	866.16
	5BP0095370	Left/Right Directional Attachment	80.64
	5BP0014984	Lock Nut for Spout (SS1079P, SS1116P, SS1180P, SS1220P)	53.76

Landscaping

SS1220P Pendular Spreader - 3-Point PTO Category I or II Continued

CODE	ATTACHMENT IDENTIFIER	T DESCRIPTION	SUGGESTED LIST PRICE USD (\$)
	5BP0099451	ATTACHMENTS FOR FIELD CONVERSIONContinued Rubber Insert	119.84
	5BP0099452	Salt and Sand Spout	322.92

Landscaping

SS3067B Broadcast Spreader - Poly Hopper - 3-Point PTO Category I Non-iMatch

Equipment for Base Machine

Hopper Material: Polyethylene
Hopper Weight Capacity: 860 lbs.
Hopper Volume Capacity: 10 Cubic Ft.
Machine Weight: 128 lbs.
Shipping Weight (Per Pair): 300 lbs.
Swath Spread: 49 Ft.
Hopper Width: 42 In.
Hopper Height: 42 In.
Tractor PTO HP Range: 20-60 HP
PTO RPM: 540 RPM
PTO Shaft Category I (Heavy Duty

Shielded 1-3/8 In.) 3-Point Hitch: Category 1 iMatch Compatible: No Ships to dealer assembled

ATTACHMENT
CODE IDENTIFIER DESCRIPTION

SUGGESTED LIST PRICE USD (\$)

Select One Code From Each Required Category

BASE MACHINE

1621XF SS3067B Broadcast Spreader - Poly Hopper - 3-Point PTO Category I Non-iMatch

737.00

SS3067B Broadcast Spreader - Poly Hopper - 3-Point PTO Category I Non-iMatch Continued THIS PAGE IS INTENTIONALLY LEFT BLANK

Landscaping

PS1001 Integral Subsoiler

Equipment for Base Machine

Hitch:
Lift-type, Category I,
iMatch Compatible
Working Depth:
Up to 24 In. (609.6 mm)
Transport Length:
16 In. (406.4 mm)
Transport Width:
32.5 In. (825.5 mm)
Transport Height:

Tractor Engine HP Range:
25 - 45 HP
Point:
Reversible, Rectangular Sloped Point,
2.5625 In. (65.1 mm) x 12 In. (304.8 mm)

ATTACHMENT CODE IDENTIFIER DE

49 In. (1,244.6 mm)

DESCRIPTION

SUGGESTED LIST PRICE USD (\$)

Select One Code From Each Required Category

BASE MACHINE

3451XF

PS1001 Integral Subsoiler Order in multiples of two.

276.00

ATTACHMENTS FOR FIELD CONVERSION

Miscellaneous:

5TITE511154

French Kit - Includes Operator's Manual, Parts Catalog and Safety Decals PS1001

14.10

PS1001 Integral Subsoiler Continued

THIS PAGE IS INTENTIONALLY LEFT BLANK

Landscaping

DT1136 - 3 pt. Standard Duty Trencher

Equipment for Base Machine

Hitch: 3-Point Category I and iMatch
Working Depth at 65 Degree Digging angle: 36 in. (914.4 mm)
Chain Width: 6 in. (152.4 mm)
Working Weight: 650 lbs. (294.8 kg)
Tractor PTO HP:
15 HP (11.2 kW) Minimum
30 HP (22.3 kW) Maximum
Recommended Trenching Angle: 65 Degrees
Headshaft Height: 8.5 in. (215.9 mm)
Shipping Weight: 730 lbs. (331.1 kg)
Overall Length: 79 in. (2,006.6 mm)
Overall Width: 38 in. (965.2 mm)

Overall Height: 29 in. (736.6 mm)
Discharge Auger: 14 in. (355.6 mm)
Spoil Discharge Reach: 21 in. (533.4 mm)
540 RPM Rear PTO
Slip Clutch Overload Protection
Parking Stand: Standard
Rear Hydraulics Required

ATTACHMENT
CODE IDENTIFIER DESCRIPTION

SUGGESTED LIST PRICE USD (\$)

Select One Code From Each Required Category

BASE MACHINE

1561XF

DT1136 - 3 pt. Standard Duty Trencher *Includes 36 in. boom, crummer, and chain.*

7,664.00

DT1136 - 3 pt. Standard Duty Trencher Continued

THIS PAGE IS INTENTIONALLY LEFT BLANK

Landscaping

WC1103 Wood Chipper, 3-Point, PTO Drive, Gravity Feed 3 In. Capacity

Equipment for Base Machine

Using a Belt Drive System
PTO Speed Increased from
540 to 1380-1920 RPM's at Rotor
(Depending on Model)
High Speed Design Requires Less Horsepower
than Direct Drive Models
Double Sided A8 Tool Steel Knives
Adjustable Hardened Anvil

SMV is Standard Equipment 1 Year Parts and Labor Warranty

CODE	ATTACHMENT IDENTIFIER	DESCRIPTION	SUGGESTED LIST PRICE USD (\$)
		Select One Code From Each Required Category	
		BASE MACHINE	
1501XF		WC1103 Wood Chipper, 3-Point, PTO Drive, Gravity Feed 3 In. Capacity	3,757.00
		ATTACHMENTS FOR FIELD CONVERSION	
		Miscellaneous:	

Destination of Quebec only. Includes French safety decals and manual.

WC1103 Wood Chipper, 3-Point, PTO Drive, Gravity Feed 3 In. Capacity
Continued THIS PAGE IS INTENTIONALLY LEFT BLANK

Landscaping

WC1105 Wood Chipper, 3-Point, PTO Drive, Gravity Feed 5 In. Capacity

Equipment for Base Machine

Using a Belt Drive System
PTO Speed Increased from
540 to 1380-1920 RPM's at Rotor
(Depending on Model)
High Speed Design Requires Less Horsepower
than Direct Drive Models
Double Sided A8 Tool Steel Knives
Adjustable Hardened Anvil

SMV is Standard Equipment 1 Year Parts and Labor Warranty

CODE	ATTACHMENT IDENTIFIER	DESCRIPTION	LIST PRICE USD (\$)
		Select One Code From Each Required Category	

BASE MACHINE

1502XF WC1105 Wood Chipper, 3-Point, PTO Drive, Gravity Feed 5 In. Capacity 5,260.00

ATTACHMENTS FOR FIELD CONVERSION

Miscellaneous:

5PQ903178 French Operators Manual & Decal Kit WC1105 Wood Chipper
Destination of Quebec only. Includes French safety decals and manual.

54.88

WC1105 Wood Chipper, 3-Point, PTO Drive, Gravity Feed 5 In. Capacity

Continued THIS PAGE IS INTENTIONALLY LEFT BLANK

Landscaping

WC1205 Wood Chipper, 3-Point, PTO Drive, Hydraulic Feed 5 In. Capacity

Equipment for Base Machine

Using a Belt Drive System
PTO Speed Increased from
540 to 1380-1920 RPM's at Rotor
(Depending on Model)
Hydraulic Feed
High Speed Design Requires Less Horsepower
than Direct Drive Models
Double Sided A8 Tool Steel Knives
Adjustable Hardened Anvil

SMV is Standard Equipment 1 Year Parts and Labor Warranty

CODE	ATTACHMENT IDENTIFIER	DESCRIPTION	SUGGESTED LIST PRICE USD (\$)
		Select One Code From Each Required Category]
		BASE MACHINE	
1511XF		WC1205 Wood Chipper, 3-Point, PTO Drive, Hydraulic Feed 5 In. Capacity	7,792.00
		SPECIAL EQUIPMENT - FACTORY INSTALLED	
8000		WC1205 Self-Contained Hydraulics	980.62
8010		WC1205 Auto Feed (Speed Control)	1,210.36
		ATTACHMENTS FOR FIELD CONVERSION	
	5PQ903179	Miscellaneous: French Operators Manual & Decal Kit WC1205 Wood Chipper Destination of Quebec only. Includes French safety decals and manual.	62.72

WC1205 Wood Chipper, 3-Point, PTO Drive, Hydraulic Feed 5 In. Capacity
Continued

THIS PAGE IS INTENTIONALLY LEFT BLANK

Landscaping

WC1208 Wood Chipper, Pull Type, PTO Drive, Hydraulic Feed 8 In. Capacity

Equipment for Base Machine

Using a Belt Drive System
PTO Speed Increased from
540 to 2050 RPM's at Rotor
(Depending on Model)
Hydraulic Feed
High Speed Design Requires Less Horsepower
than Direct Drive Models
Drum-Style Rotor
Double Sided A8 Tool Steel Knives

Adjustable Hardened Anvil SMV is Standard Equipment 1 Year Parts and Labor Warranty

SUGGESTED LIST PRICE USD (\$)	NT DESCRIPTION	ATTACHMENT IDENTIFIER	CODE
	Select One Code From Each Required Category		
	BASE MACHINE		
15,850.00	WC1208 Wood Chipper, Pull Type, PTO Drive, Hydraulic Feed 8 In. Capacity		1513XF
	SPECIAL EQUIPMENT - FACTORY INSTALLED		
1,299.00	WC1208 Self-Contained Hydraulics		8000
1,320.39	WC1208 Auto Feed (Speed Control)		8010
	ATTACHMENTS FOR FIELD CONVERSION		
62.72	Miscellaneous: French Operators Manual & Decal Kit WC1208 Wood Chipper	5PQ903185	

Destination of Quebec only. Includes French safety decals and manual.

WC1208 Wood Chipper, Pull Type, PTO Drive, Hydraulic Feed 8 In. Capacity
Continued THIS PAGE IS INTENTIONALLY LEFT BLANK