



Forcible Entry Tools

AKRON BRASS COMPANY | PH. 800.228.1161 (330.264.5678) | akronbrass.com





When moments count, rely on Akron® Brass forcible entry tools to pry, puncture, strike and force your way through or around an obstruction. These tools are constructed of alloy steel providing superior durability and strength.




Tri-Bar™

The Tri-Bar forcible entry tool is manufactured as a **single piece drop forged** bar made of heat treated alloy steel. This tool will not chip or break during a critical operation. Use the adze, pick or fork to quickly break many types of locked doors, punch through walls or shut off gas valves. The Tri-Bar offers three hammer surfaces to force your way through or around the obstruction. Combine Akron's flathead axe with the Tri-Bar for a complete set of irons.

TRI-24, TRI-30, TRI-36 and TRI-42

- Multiple uses: Pry, twist, puncture, strike, gain purchase point, gas meter shutoff, vehicle extrication, vertical ventilation
- Heat treated for added strength
- Powder coated finish
 - Black (Standard)
 - High visibility Orange or Silver (30" and 36" only)
- Length: 24", 30", 36" and 42" (610 mm, 762 mm, 914 mm, and 1067 mm)
- Weight: 24" = 9 lbs, 30" = 10 lbs, 36" = 11 lbs and 42" = 13 lbs (610 mm = 4.1 kg, 762 mm = 4.5 kg, 914 mm = 5 kg, and 1067 mm = 5.9 kg)
- Made in U.S.A.
- Optional adjustable shoulder strap
- Optional marrying strap

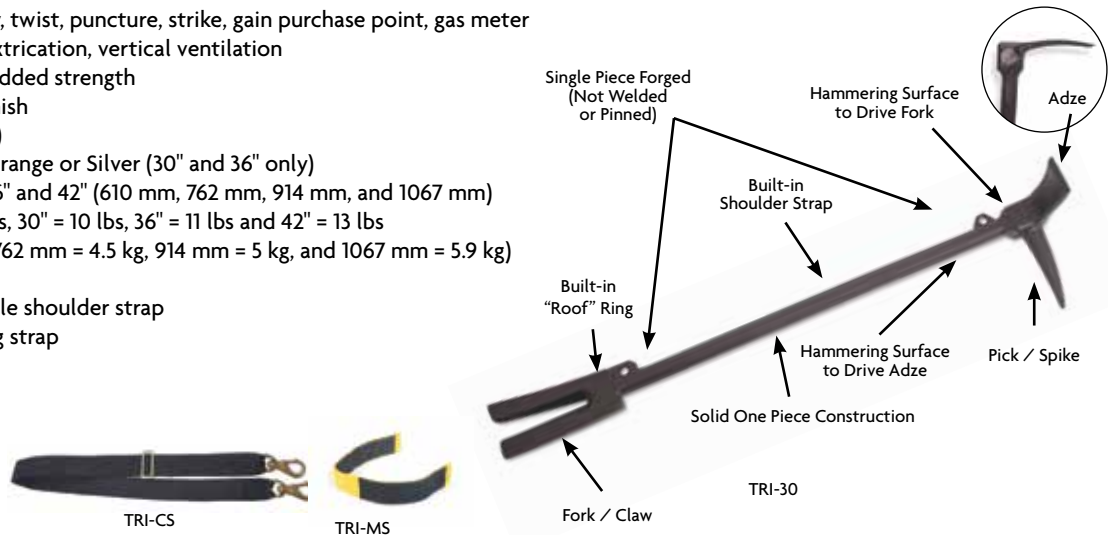

Brute Force™

The Brute Force is a revolutionary tool for forcible entry that is also designed to marry with our Tri-Bar (or any halligan). This tool is a sledge hammer with benefits. It has a sledge head for driving the Tri-Bar, a chisel/axe edge for cutting/ripping, and a marrying slot for the Tri-Bar. It can perform all of the jobs that the hammer can in addition to great ripping and tearing capabilities.

BF-8 Brute Force Forcible Entry Tool

- The 7 lb. hardened sledge head gives the Brute Force more power over the standard 6lb. flat head axe as a striking tool when used with the Tri-Bar during forcible entry operations.
- The pick/chisel is an aggressive ripping and tearing tool, which can penetrate impact resistant glass (hurricane windows), high impact drywall and car hoods. It can open plaster and lath (wood or wire) walls and ceilings. The tool can be used to breach brick or block walls making basement window openings larger for RIC operations or fire attack. It can also split pad locks when struck by another tool.
- It marries well with the Tri-Bar, making it a good combination for forcing doors and comfortable to carry.
- Applications for this tool are forcible entry, overhaul, salvage, rapid intervention, ventilation, USAR operations, marine/shipboard damage control and many more.



Brute Force set of Irons



Forcible Entry Tools


Roof Hook

Like all Akron Brass Tools, the Roof Hook is designed to perform reliably through the toughest use and abuse seen by today's firefighters. It is designed with the highest grade materials for a long lasting, durable, and maintenance-free tool. This all around tool can be used for forced entry, prying open roof scuttles, sounding floors and roofs, venting windows, pulling ceiling, opening walls, and much more.


- Multi-purpose head and chisel are standard ARH tool
- Hollow steel shaft for extreme strength and lightweight application
- Industrial quality abrasive grips shipped loose for personalized placement
- Powder-coated finish for unparalleled corrosion resistance

Options:

- Colors- Black, yellow, red, green, white & silver
- Adjustable shoulder strap
- Hook options

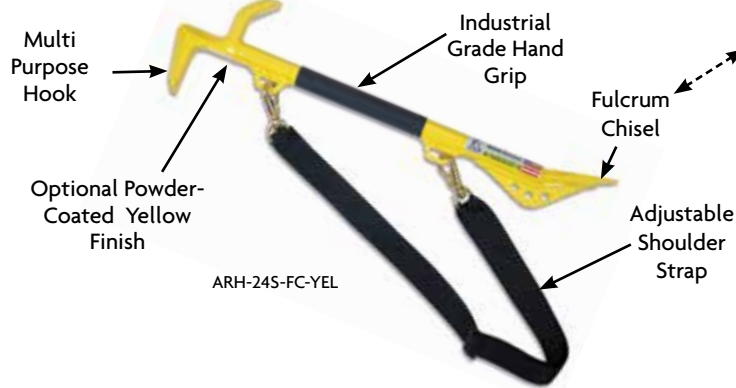

Hook Options:

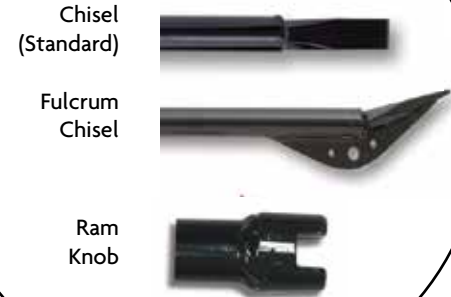

Customize Your Roof Hook

Select one option from each column to build your Roof Hook part number.

	Length	Sholder Strap	Available Options	Custom Colors
ARH	17" (432 mm)	___ = None S = include shoulder Strap	___ = Standard Chisel FC = Fulcrum Chisel RK = Ram Knob	___ = Black
	24" (610 mm)			YEL = Yellow
	36" (914 m)			RED = Red
	48" (1.2 m)			GRN = Green
	60" (1.5 m)			WHT = White
	72" (1.83 m)			SIL = Silver
	96" (2.44 m)			

Example: **ARH** - **36** - **FC** - **YEL**

ARH-36-FC = 36" Roof Hook with Fulcrum Chisel Black

Length based on overall length of tool including head and foot.

Gorilla Hook

This heavy-duty roof hook can be used for forced entry, prying, sounding, venting, probing, pulling ceiling, opening walls and more.

AGH

- Solid steel shaft for extreme durability
- Multi-purpose head and fulcrum chisel foot for maximum leverage and prying
- Industrial quality abrasive grips
- Powder-coated finish for unparalleled corrosion resistance
 - High Visibility Green Only
- Available in 3 sizes: 36", 48" & 72" (914 mm, 1219 mm, & 1829 mm) with folcrum chisel
- Optional carrying strap





Trooper Bar™

The Trooper Bar is a truly multiple purpose utility bar. The unique gooseneck shaped design creates a high degree of leverage forcing your way through the obstruction. This maximizes prying force for quick entry.

50

Trooper Bar

- Solid one piece construction
- Zinc-plated
- Gooseneck design
- Length: 26" (660 mm)
- Weight: 8 1/2 lbs. (3.9 kg)



Style 50

Pinch Point Bars

Manufactured of high carbon steel with a single one piece construction, Akron's heavy duty Pinch Point Bars provide superior strength for prying, puncturing, digging, lifting and moving heavy objects.

PPB-36 36" (.91 m) Pinch point bar, 6 lbs.

PPB-51 51" (1.3 m) Pinch point bar, 12 lbs.

PPB-60 60" (1.5 m) Pinch point bar, 18 lbs.



PPB-36

Wynn Tool

Expanding the line of firefighting tools, the Wynn Tool is a variation of a pike pole developed specifically for pulling ceilings, especially when dealing with plaster lathe! It has a true chisel tip that can penetrate any wall or ceiling to gain leverage with no lack of strength. The Wynn Tool is available in either a 5 foot (1.5 m) or 6 (1.8 m) foot length with our heavy duty steel pole and D-Handle design. This innovative heavy duty tool is made with highest-grade materials and workmanship.

- Chisel tip
- Angled pike
- D-Handle
- Grip tape wrap

Wynn-5D 5" (1.5m) Wynn Tool

Wynn-6D 6" (1.8 m) Wynn Tool



Axes & Sledges

PHY-6 6 lbs. (2.7 kg) Pick head axe w/36" (914 mm) yellow fiberglass handle

FHY-6 6 lbs. (2.7 kg) Flat head axe w/36" (914 mm) yellow fiberglass handle

WP-6 6 lbs. (2.7 kg) Pick head axe w/36" (914 mm) hickory handle

WF-6 6 lbs. (2.7 kg) Flat head axe w/36" (914 mm) hickory handle

PHY-8 8 lbs. (3.6 kg) Pick head axe w/36" (914 mm) straight yellow fiberglass handle w/rubber grip

FHY-8 8 lbs. (3.6 kg) Flat head axe w/36" (914 mm) straight yellow fiberglass handle w/rubber grip

FSY-8 8 lbs. (3.6 kg) Sledge hammer w/36" (914 mm) fiberglass handle

FSY-10 10 lbs. (4.5 kg) Sledge hammer w/36" (914 mm) fiberglass handle

FSY-12 12 lbs. (5.4 kg) Sledge hammer w/36" (914 mm) fiberglass handle

Replacement handles available for all hand tools




PHY-8



WP-6

AS-510

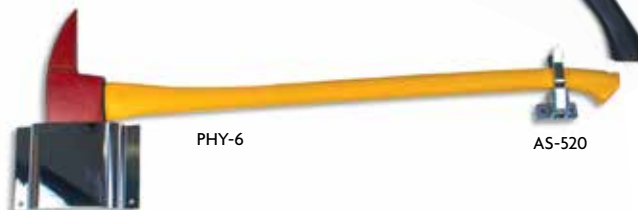

PHY-6

AS-520



FSY-10



FHY-6



Pike Poles

Pike Poles

Akron® Brass Pike Poles are designed to perform reliably through the toughest use and abuse seen in the today's firefighting. The Pike Poles are constructed with the highest-grade materials and workmanship providing firefighters everywhere with a long lasting, durable, maintenance-free tool they can count on. Akron Brass Pike Poles get the job done!

Akron offers the widest range of pike poles in the fire service today with 5 unique poles, 6 hooks and 4 handle options.

- Meshed fiberglass for added strength and durability
- Lengths of 3' to 14'
- Hooks assembled with heavy duty spring steel roll pins for durability and ease of maintenance. *Excludes I-B
- Available with a wide variety of hooks and handles
- High visibility fiberglass for low visibility environments



5 Pole Options



UT

Ultra-Tough (UT) Honeycombed core for superior strength and weight. 5 times as strong the Ultra-Lite and 2 times as strong as competitive offerings.
Diameter: 1 1/4" (31.75 mm)



UL

Ultra-Lite (UL) Lightweight, durable and easy to handle
Diameter: 1 1/4" (31.75 mm)



PP

Gripper (PP) Solid fiberglass in a unique oval shape
Dimensions: 3/4" x 1 1/8" (19 mm x 28.581 mm)



IB

I-Beam (IB) I-Beam shaped solid fiberglass for maximum strength and easy gripping
Dimensions: 1" x 1 3/8" (25 mm x 34.93 mm)



WR

Wood (WR) Traditional white ash wood poles available
Diameter: 1 3/8" (34.93 mm)

To minimize shipping cost or to add length to poles, we offer the Double Ultra-Lite (UL-DG) with 8" solid fiberglass rod and steel spring roll pins to permanently assemble or Double Gripper (DG) with a metal sleeve, epoxy and steel spring roll pins to permanently assemble after shipment. This results in a 9' to 20' (2.7 m to 6.1 m) heavy duty pike pole that can be shipped by UPS.





7 Hook Options



USA Hook
Standard



Multi-Purpose
New York Style
(MP) Optional



Dry Wall Hook
(DWH) Optional



Shredder™
(SH) Optional



Rubbish Hook
(RH) Optional



3/4" Rubbish Hook
L.A. Trash & Vent
(LARH) Optional

4 Handle Options



Butt End
Standard



Ram Knob
(RK) Optional



D-Ring Handle
(D) Optional



Heavy-Duty D-Handle
(HD) Optional

Customize Your Pike Pole

Select one option from each column to build your Pike Pole part number.

Pole		Length	Handle	Hook
UT	= Ultra-Tough	3' (.9 m)	___ = Butt End	___ = Standard Hook
UL	= Ultra-Lite	4' (1.22 m)	D = D-Handle	DWH = Drywall Hook
UL-DG	= Double Ultra-Lite	6' (1.83 m)	RK = Ram Knob	RH = Rubbish Hook
IB	= I-Beam	8' (2.4 m)	D90= D-Handle 90° from Head	MP = Multipurpose w/Ram Knob
PP	= Gripper	10' (3.0 m)	HD = Heavy-Duty D-Handle*	D-MP = Multipurpose w/D-Handle
DG	= Double Gripper	12' (3.66 m)		LARH = LA Trash & Vent
WR	= Wood			SH = Shredder

Example: UL - 12 - DWH

UL-12-DWH = 12' Ultra Lite Pike Pole with Drywall Hook





Pike Poles

Adapt-a-Pole™

The Adapt-a-Pole delivers a multi-purpose tool for use in every situation. This tool allows for flexibility & versatility from the same handle. To change tools or hooks, simply disengage the Adapt-a-Pole locking mechanism, select and attach the desired tool or hook for the job. Then it's back to work. There is no longer a need to carry several different tools to accomplish the many tasks around the fire ground. The Adapt-a-Pole provides the tool and hooks for all those tasks in one simple yet effective tool.

AP-VK ROOF KIT

Includes:

- 1- USA Hook 3' (.9 m) (AP-3-USA)
- 1- Rubbish / Ventilation Hook 3' (.9 m) (AP-3-RH)
- 1- D-Handle 3' (.9 m) (AP-3-DH)
- 1- Extension 3' (.9 m) (AP-3-EXT)

AP-SK SALVAGE KIT

Includes:

- 1- Dry Wall Hook 3' (.9 m) (AP-3-DWH)
- 1- Squeegee (AP-SQ)
- 1- Square Nose Shovel (AP-SH)
- 1- Push Broom (AP-BH)
- 2- Handles 4' (1.22 m) (AP-4-BG)
- 1- Extension 4' (1.22 m) (AP-4-EXT)

Additional Adapt-a-Pole Options:

- AP-3-USA 3' (.9 m) USA Hook
- AP-3-RH 3' (.9 m) Rubbish Hook
- AP-3-DWH 3' (.9 m) Dry Wall Hook
- AP-3-BG 3' (.9 m) Bumper Grip
- AP-3-DH 3' (.9 m) D-Handle
- AP-3-EXT 3' (.9 m) Extension
- AP-4-EXT 4' (1.22 m) Extension
- AP-4-BG 4' (1.22 m) Bumper Grip
- AP-BH Broom Head
- AP-SH Square Nose Shovel Head
- AP-SQ Squeegee
- AP-AS Scoop Shovel Head



Miscellaneous Tools

- AS-27D** Scoop Shovel w/ 27" (8.9 m) Ultra-Lite Fiberglass Rod & D-Handle
- RS-48F** Round Point Shovel w/ 48" (1.22 m) Ultra-Lite Handle
- SS-48F** Square Point Shovel w/ 48" (1.22 m) Ultra-Lite Handle
- UL-SQ-60F** 18" (460 mm) Squeegee Head w/ 60" (1.5 m) Ultra-Lite Handle (One Piece)
- UL-SQ24-60F** 24" (610 mm) Squeegee Head w/ 60" (1.5 m) Ultra-Lite Handle (One Piece)
- UL-DG-SQ** 18" (460 mm) Squeegee Head w/ 60" (1.5 m) Ultra-Lite Handle (Three Piece)
- UL-DG-SQ24** 24" (610 mm) Squeegee Head w/ 60" (1.5 m) Ultra-Lite Handle (Three Piece)





Pinch Point Bar Bracket

- PPBH**
- Pinch point bar holder set, spring loaded, raised mounting; chrome plated zinc.



Pike Pole Brackets

Pike Pole brackets are constructed of the finest materials and are designed for easy mounting.

- PPBK**
- Designed to fit the contour of any pike pole or handle
 - Ideal for mounting between $\frac{3}{4}$ " - $1\frac{1}{4}$ " in diameter handles
- PPBK-LG**
- Ideal for round or elliptical shaped handles between $1\frac{1}{2}$ " - $1\frac{3}{4}$ " in size
- HM-58**
- $1\frac{1}{8}$ - $1\frac{3}{8}$ " O.D. horizontal pole mount with gasket
 - Chrome plate zink finish
 - Works great with "I-Beam" and "Ultra-Tough" pike poles
- HM-59**
- $1\frac{3}{8}$ - $1\frac{3}{4}$ " O.D. horizontal pole mount with gasket
 - Chrome plate zink finish
- VM-58**
- $1\frac{1}{8}$ - $1\frac{3}{8}$ " O.D. vertical pole mount with gasket
 - Chrome plate zink finish
 - Works great with "I-Beam" and "Ultra-Tough" pike poles
- VM-59**
- $1\frac{3}{8}$ - $1\frac{3}{4}$ " O.D. vertical pole mount with gasket
 - Chrome plate zink finish
- PPR-60**
- Pike pole ring with gasket
 - Chrome finish
 - Works well with all pike poles, excluding D-Handles



PPBK



PPBK-LG



HM-58



PPR-60



VM-59

Tool Brackets

These heavy-duty Tool Brackets have covered jaws for securing various tools.

- 39**
- $\frac{3}{4}$ " - 1" Horizontal Tool Bracket**
- Fits smaller tools and applicators with $\frac{3}{4}$ " to 1" O.D.
 - Length: $3\frac{7}{8}$ " (98 mm), weight: 4 oz. (118 ml)
 - Fits Styles 15, 17, 19
- 40**
- $1\frac{1}{2}$ " - $2\frac{1}{2}$ " Horizontal Tool Bracket**
- Designed for $1\frac{1}{2}$ " and $2\frac{1}{2}$ " applicators and other tools, such as axe handles, with a $1\frac{1}{8}$ " to $1\frac{3}{4}$ " O.D.
 - Length: $4\frac{1}{8}$ " (105 mm), weight: 4 oz. (118 ml)
 - Fits Styles 1088, 2055, 2015, 2415, 2225
- 41**
- $\frac{3}{4}$ " - 1" Vertical Tool Bracket**
- Same as Style 39 except for vertical mount
 - Length: $5\frac{3}{8}$ " (137 mm), weight: 4 oz. (118 ml)
 - Fits Styles 15, 17, 19
- 42**
- $1\frac{1}{2}$ " - $2\frac{1}{2}$ " Vertical Tool Bracket**
- Same as Style 40 except for vertical mount
 - Length: $5\frac{3}{8}$ " (143 mm), weight: 4 oz. (118 ml)
 - Fits Styles 1088, 2055, 2015, 2415, 2225



Style 40

Style 42

Axe Mounting Brackets

- AS-510**
- Axe blade bracket for horizontal mounting; polished aluminum
- AS-520**
- Axe handle bracket; chrome plated zinc
- 511-SP**
- $\frac{1}{4}$ " poly spacer for 8 lbs. axes
- P-APC**
- Pick head axe cover w/chain
- AS-530**
- Axe blade bracket for vertical mounting 6 lbs. pick axe; bright alum. treadplate
- AS-540**
- Axe blade bracket for vertical mounting 6 lbs. flat axe; bright alum. treadplate
- AS-550**
- Axe blade bracket for vertical mounting 8 lbs. pick axe; bright alum. treadplate
- AS-560**
- Axe blade bracket for vertical mounting 8 lbs. flat axe; bright alum. treadplate



AS-550



P-APC



AS-510



AS-520



Wildland Fire Hand Tools

Akron® Brass Wildland Fire Hand Tools feature durable lightweight construction, superior cutting ability, exceptional tool balance and powerful grubbing performance. When working on a fire line, you can rely on the durability, workmanship and performance you have come to expect from Akron Brass.



McLeod Tool

The McLeod Tool is used to clear brush and debris as well as construct fire control lines. It is designed to break down easily for packing into the most remote locations.

WR-MT-48

- 48" (1.22 m) White Ash handle
- Blade is 3/16" (4.76 mm) thick for added strength
- Powder coated

UL-MT-48

- 48" (1.22 m) Ultra-Lite fiberglass handle
- Blade is 3/16" (4.76 mm) thick for added strength
- Powder coated



Pulaski Axe

The Pulaski Axe is designed to cut through heavy brush and even small trees.

WPL-4

- 36" (.9 m) American Hickory handle (handle only)
- Overall length is 35" ± 1"
- 3.75 lb. (1.7 kg) axe with mattock blade
- Painted red



Fire Broom


The Fire Broom is designed for direct attack on small brush or grass fires. The hardwood handle, stiff textured Palmyra fiber, and metal cap are locked together to prevent loose handles and fiber fallout.

FB-42

- 42" (1.5 m) hardwood handle
- Palmyra fiber broom

FB-42C

- Case of 12 FB-42s

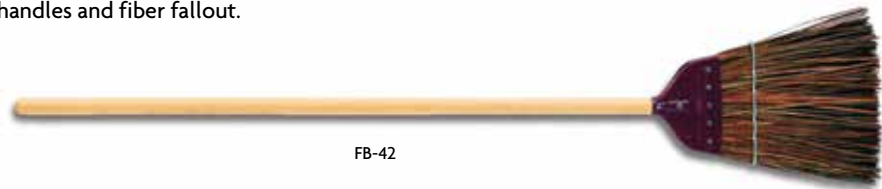



Fire Rake

The Fire Rake is designed with four specially sharpened teeth allowing for ease of chopping, raking, cutting, and moving debris on any fire line. Manufactured in accordance with the United States Department of Agriculture Forest Service Specifications.

FR-12

- 60" (1.5 m) Ash handle
- 14" (356 mm) wide steel rake head
- Powder coated
- 4 blades bolted to head

FR-60F

- 60" (1.5 m) solid fiberglass handle
- 14" (356 mm) wide steel rake head
- Powder coated
- 4 blades bolted to head

UL-FR-60F

- 60" (1.5 m) Ultra-Lite handle
- 14" (356 mm) wide steel rake head
- Powder coated
- 4 blades bolted to head



FR-12

Fire Beater

The Fire Beater is designed to knock down, smother, and extinguish a small grasslands or wildlands fire.

FB-15

- 60" (1.5 m) Ash handle with clear lacquer finish
- Heavy duty PVC belted rubber flap (12" x 14") or (305 mm x 356 mm)
- Black powder coated steel head

FB-60F

- 60" (1.5 m) solid fiberglass handle
- Heavy-duty PVC belted rubber flap (12" x 14") or (305 mm x 356 mm)
- Black powder coated steel head

UL-FB-60F

- 60" (1.5 m) Ultra-Lite handle
- Heavy duty PVC belted rubber flap (12" x 14") or (305 mm x 356 mm)
- Black powder coated steel head



FB-15





Wrenches

Spanner Wrenches

- 10 Universal Spanner Wrench**
The all-purpose wrench for $\frac{3}{4}$ " (19 mm) to 3" (76 mm) rocker lug and pin lug couplings. Features a belt hook eye, hammer head and a gas cock shutoff.
- Akrolite™ construction
 - Length: 11 $\frac{1}{2}$ " (292 mm), weight: 8 oz. (227 g)
- 13 Folding Pocket Spanner**
Fits all $\frac{3}{4}$ " (19 mm) to 3" (227 g) rocker lug and pin lug couplings.
- Brass construction
 - Length: 5 $\frac{1}{8}$ " (130 mm) (folded), weight: 8 oz. (227 g)
- 14 Folding Pocket Spanner**
Fits all $\frac{3}{4}$ " (119 mm) to 3" (76 mm) rocker lug and pin lug couplings.
- Akrolite construction
 - Length: 5 $\frac{1}{8}$ " (130 mm) (folded), weight: 4 oz. (113 g)
- 19 Universal Suction Spanner Wrench**
An all-purpose wrench for long handle, rocker lug, or pin lug couplings from 2 $\frac{1}{2}$ " to 6". Open end slips over long handles for additional leverage and claw fits rocker or pin lugs. The opposite end can be used as a pry or crowbar. Inverted "T" body construction for light weight and added strength.
- Plated steel
 - Length: 18 $\frac{3}{4}$ " (476 mm), weight: 3 $\frac{1}{4}$ lbs. (1.5 kg)
- 25 Hole Type Spanner Wrench**
For hole type, rocker lug and pin lug couplings. Plated for corrosion resistance. Specify either $\frac{3}{4}$ " (19 mm) - 1" (25 mm) or 2 $\frac{1}{2}$ " (64 mm) size.
- Plated steel construction
 - Length: 7" (178 mm), weight: 12 oz. (340 g)
- 46 Fitzall Combination Spanner**
Designed to fit rocker lug and pin lug couplings from $\frac{3}{4}$ " (19 mm) to 4" (102 mm). Gas shutoff in handle.
- Akrolite construction
 - Length: 10 $\frac{1}{4}$ " (260 mm), weight: 8 oz. (227 g)
 - NSN 5120-00-018-1519
- SS-525 Super Spanner Wrench**
Fits any standard 4" (102 mm) and 5" (127 mm) Storz or locking type Storz coupling and 1 $\frac{1}{2}$ " (38 mm) to 3" (76 mm) rocker lug couplings. Gas shutoff. Unique bent design for easy pick up with a gloved hand.
- Bright zinc plated.
- SS-MP Super Spanner Set**
Set includes mounting plate and four SS-525 super spanners wrenches
- SS-523 Single Ended Spanner Wrench**
Fits any standard 4" (102 mm) and 5" (127 mm) storz or locking type storz coupling with handle grip; bright zinc plated.
- SS-523-MP Single Ended Spanner Set**
Set includes mounting plate and four SS-523 single ended spanners
- SS-MPX Spanner Mounting Plate**
Mounting plate for SS-523 & SS-525 spanner wrenches



Style 10



Style 13



Style 14



Style 19



Style 25



Style 46



SS-525



SS-MP



SS-523-MP



Aluminum Wrench Holders

Anodized Aluminum Dual Wrench Holder is designed so wrenches can be removed or replaced with one hand.

- Anodized aluminum for added durability
- 2 or 3 wrench options
- Designed so wrenches can be removed with one hand

0441 3 Wrench Holder

0442 3 Wrench Holder with (1) 15 & (2) 46

0443 3 Wrench Holder with (1) 15 & (2) 10

446 2 Wrench Holder

- Size: 5" (127 mm) x 11 1/2" (292 mm), weight: 1 1/2 lbs. (.68

447 2 Wrench Holder with Wrenches

- Holder with (2) Style 46 wrenches

448 2 Wrench Holder with Wrenches


- Holder with (2) Style 10 wrenches

449 2 Wrench Holder with Wrenches

- Holder with (1) Style 10 and (1) Style 46 wrench



Style 443



Style 448

Nylon Wrench Holder/Sets

Impact resistant Nylon Wrench Holder is designed to hold either (2) Spanners or (2) Spanners and a Hydrant Wrench. Holders will withstand temperatures to -40° F and have a 10 year guarantee against breakage.

2441 3 Wrench Holder

- Size: 4 1/2" (114 mm) x 10" (254 mm), weight: 10 oz. (284 g)

2442 3 Wrench Holder with Wrenches

- Holder with (1) Style 15 and (2) Style 46 wrenches

2443 Wrench Holder with Wrenches

- Holder with (1) Style 15 and (2) Style 10 wrenches

2446 2 Wrench Holder


- Size: 4 1/2" (114 mm) x 7 1/2" (191 mm), weight: 8 oz. (227 g)

2447 2 Wrench Holder with Wrenches

- Holder with (2) Style 46 wrenches

2448 2 Wrench Holder with Wrenches

- Holder with (2) Style 10 wrenches

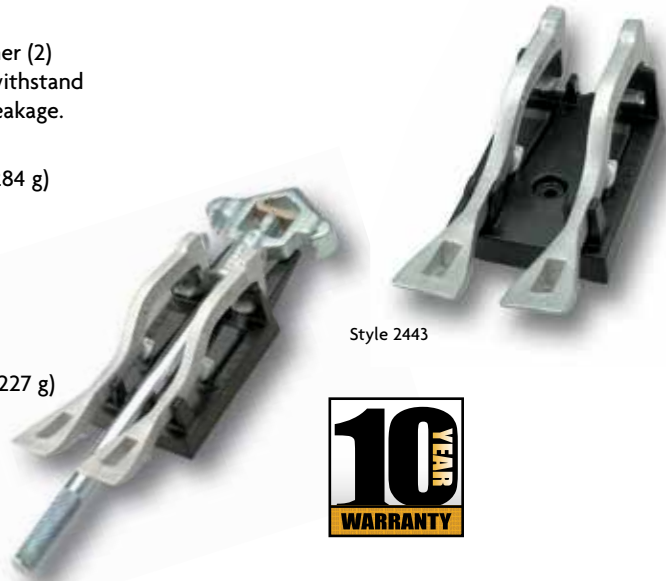

Style 2443



Hydrant Wrenches

- Adjustable to 1 3/4" (44 mm) pentagon or 1 1/4" (32 mm) square nut
- Plated for corrosion resistance
- Designed to prevent hydrant nut damage
- Spanner fits 2 1/2" (64 mm) to 4 1/2" (114 mm) rocker lug or pin lug couplings
- Replaceable brass inserts

15 Hydrant and Spanner Wrench

- Length: 19 1/2" (495 mm), weight: 5 lbs. (2.2 g)

17 Adjustable Hydrant Wrench

- Length: 18 5/8" (473 mm), weight: 4 1/2 lbs. (2 kg)



Style 15



Style 17