


# Bush-Whacker ST-104 2013

## Heavy-Duty 8-Foot Offset Smooth Top Rotary Cutters

**Bush-Whacker mowers from Hall Manufacturing are increasing in demand for agricultural, commercial and other applications where a heavy-duty, rugged mower is needed. The Bush-Whacker is available in a range of sizes to fit your needs - from the five foot model all the way to the big 20-footer.**

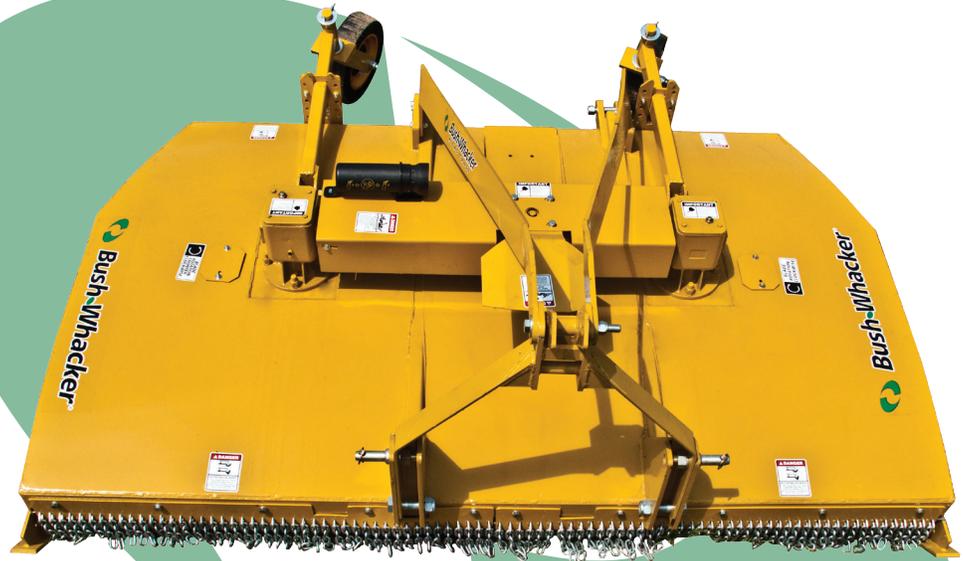

**Hall Manufacturing has been in business for more than 75 years. During this time they've sold more than 10,000 units across the U.S.**

- **10 gauge lower deck & 12 gauge upper deck.**
- **4-bolt mounting on gearboxes - heads are tack-welded to bottom of deck so one person can tighten the nuts or change the gearbox.**
- **Blades are 1/2" by 4" instead of traditional 1/2" by 3 1/2"**
- **Flat Steel Plate Sides- 1/4" Material Shaped to form sides of cutter.**



**Bush-Whacker**<sup>®</sup>  
KICKS GRASS!

Hall Manufacturing  
3706 East Washington •  
PH: 501-945-7550

P.O. Box 5638 • North Little Rock, AR 72119  
• [www.bush-whacker.com](http://www.bush-whacker.com)



# Bush-Whacker®

## Model ST-104 - 8-Foot Offset Smooth Deck Rotary Cutter

### Specifications\*

**Gearboxes — 540 RPM** 120 HP main or transfer box, 100 HP outboard boxes with 2 1/8" output shaft, malleable housing, forged alloy steel, carburized and hardened gears and shafts, tapered and ball bearings.

#### Slip Clutch

Heavy-duty spring type adjustment with two friction discs on main shaft, outboard protection by means of shock absorbing rubber disc connected with splined spiders which form a coupler.

#### Cutting Width

104" total cut, 57" cutting swathe to right of tractor centerline and 47" to left of tractor centerline.

#### Shielded PTO and Outboard Shafts — Category 4

Made from finest quality propeller shaft material and needle bearing universal joints.

#### Blades

1/2" material, alloy spring steel, airlift design, free-swinging for clean cutting, mounted on shoulder bolts.

#### Two Tail Wheels

For 3 point hitch: Extra heavy-duty, tapered bearings, 4" by 8" laminated puncture-proof tire.  
For pull type: Extra heavy-duty, tapered bearings, 6" by 9" laminated puncture-proof tire.

#### Cutting Height — 2" to 13"

**Bush-Whacker Special Deck** 10 gauge lower deck & 12 gauge upper deck. The smooth, easy-to-clean top deck protects the inner support frame. Combined deck thickness is 0.2391.

**Flat Steel Plate Sides- 1/4" Material** Shaped to form sides of cutter.

#### Chain Guards Front and Rear

#### Heavy-Duty Category One or Two Hitch

#### Weight - 1,920 lbs

*\*These specifications are standard; however, any State Department of Transportation Specifications that may differ from standard Bush-Whacker Specifications will take precedence and be implemented into productions*

WARRANTY: Guaranteed for 12 months against defective materials and workmanship. Defective parts must be returned prepaid to the factory. Guarantee is void if failure is due to operators negligence, abuse or using other than genuine Bush-Whacker parts.