


Heavy-Duty Single Spindle Mowers 2013

5, 6 and 7 Foot Smooth Top Rotary Cutters

Bush-Whacker mowers from Hall Manufacturing are increasing in demand for agricultural, commercial and other applications where a heavy-duty, rugged mower is needed. The Bush-Whacker is available in a range of sizes to fit your needs - from the five foot model all the way to the big 20-footer.

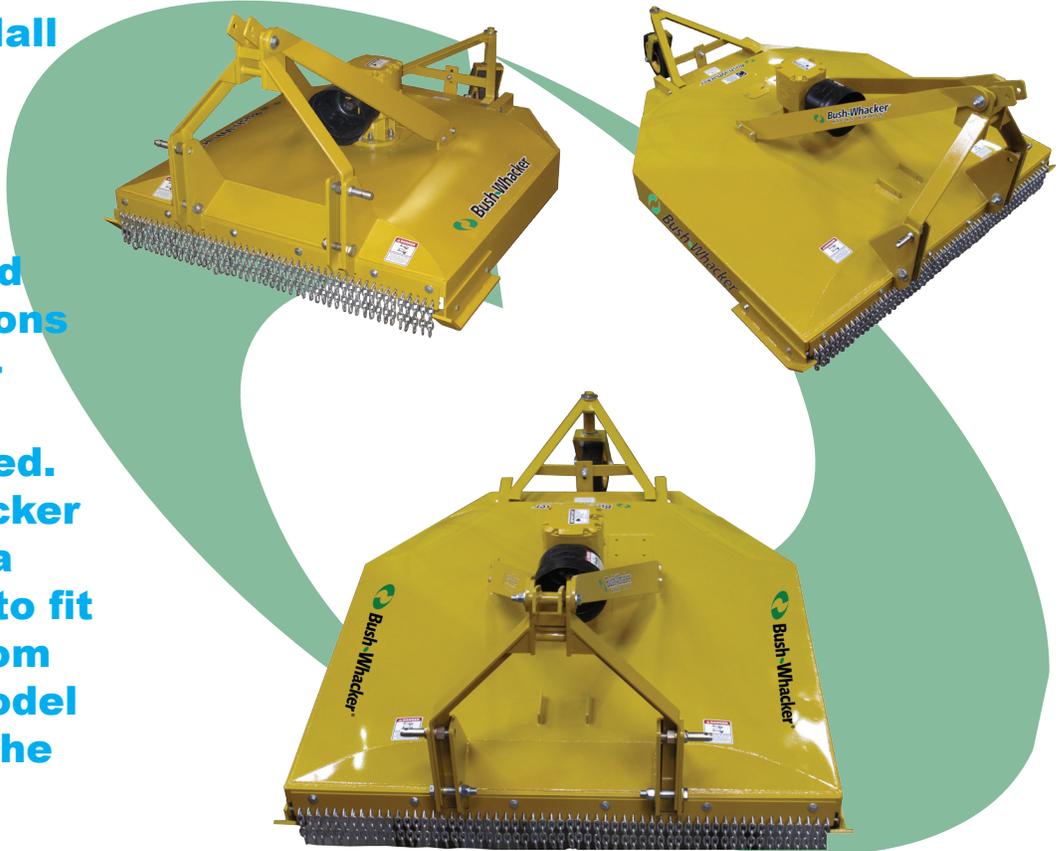

Hall Manufacturing has been in business for more than 75 years. During this time they've sold more than 10,000 units across the U.S.

- **10 gauge lower deck & 12 gauge upper deck.**
- **8-bolt mounting on gearboxes - heads are tack-welded to bottom of deck so one person can tighten the nuts or change the gearbox.**
- **Blades are 1/2" by 4" instead of traditional 1/2" by 3 1/2"**
- **Flat Steel Plate Sides- 1/4" Material Shaped to form sides of cutter.**



Bush-Whacker
KICKS GRASS!

Hall Manufacturing
3706 East Washington
PH: 501-945-7550

• P.O. Box 5638 • North Little Rock, AR 72119
• www.bush-whacker.com



Bush-Whacker®

Model ST-6010 - 5-Foot Smooth Deck Rotary Cutter

Model ST-7210 - 6-Foot Smooth Deck Rotary Cutter

Model ST-8410 - 7-Foot Smooth Deck Rotary Cutter

Specifications*

Gearboxes — 250HP, 540 RPM or 1,000 RPM Base Mounted, 1:1.6 Ratio. Malleable housing; forged alloy steel; carburized and hardened gears and shafts; 20 splined 1 3/4" input shaft, 2 3/8" output shaft; tapered bearings; lifetime lubricated.

Drive Shafts - Category 4 Made from the finest quality propeller shaft materials and needle bearing universal joints.

Slip Clutch Heavy duty spring-type adjustment with four friction discs.

Blades 1/2" by 4" material, alloy spring steel, airlift design. Free swinging when encountering obstructions. 8" overlap for better cutting. Blade tip speed: ST-6010 - 12,893 FPM, ST-7210 & ST-8410 - 15,607

Tail Wheel For 3-point hitch: Extra heavy duty, tapered bearings, 4" by 8" laminated puncture-proof tire. *For Pull Type: Extra heavy duty, tapered bearings, two 6" by 9" laminated puncture-proof tire.*

Bush-Whacker Special Deck 10 gauge lower deck & 12 gauge upper deck. The smooth, easy-to-clean top deck protects the inner support frame. Combined deck thickness is 0.2391.

Flat Steel Plate Sides- 1/4" Material Shaped to form sides of cutter.

Chain Guards Front and Rear

Dimensions ST-6010 -Cutting width: 58". Cutting height: adjustable from 1.5" to 12.5". Overall width: 60". Overall length: 109". Transportation width:64.5".

ST-7210 -Cutting width: 72". Cutting height: adjustable from 1.5" to 12.5". Overall width: 73". Overall length: 123". Transportation width:76.5". *ST-7210P -Overall length: 169"*

ST-8410 -Cutting width: 84". Cutting height: adjustable from 2" to 14". Overall width: 85". Overall length: 129". Transportation width: 88.5". *ST-8410P - Cutting Height: 3" - 17". Overall length: 180"*

Weight ST-6010 - 1,050lb. | ST-7210 - 1,300lb | ST-7210P - 1,600lb | ST-8410 - 1,420lb | ST-8410P - 1,750lb

Recommended PTO HP ST-6010 - 40HP | ST-7210 - 40HP | ST-7210P - 35HP | ST-8410 - 50 HP | ST-8410P - 45HP

**These specifications are standard; however, any State Department of Transportation Specifications that may differ from standard Bush-Whacker Specifications will take precedence and be implemented into productions*

WARRANTY: Guaranteed for 12 months against defective materials and workmanship. Defective parts must be returned prepaid to the factory. Guarantee is void if failure is due to operators negligence, abuse or using other than genuine Bush-Whacker parts.