Snap-on®

INDUSTRIAL

SOLVING THE CRITICAL.

TOOLS THAT KEEP THE ENTIRE WORLD UP AND RUNNING.

TOOL CONTROL N003-N050

AVIATION TOOLS N051-N120

INDUSTRIAL POWER TOOLS N121-N150

INDUSTRIAL SPECIALTY TOOLS N151-N202

TOOLS@HEIGHT & SAFETY N203-N250

FLEET MAINTENANCE N251-N295

INDEX NDX1-NDX38

QUICK REFERENCE

HOW DOES SNAP-ON DELIVER TORQUE? PRECISELY.

Snap-on creates the tools that allow you to apply the perfect amount of torque every time. And when you know you're delivering precisely the right torque, it takes a huge weight off your shoulders. As the industry leader in torque tools and selection, Snap-on helps you keep planes in the air, trucks on the road, heavy equipment operating, and more. From our advanced ControlTech® and TechAngle® Electronic Torque Wrenches to our Mechanical Torque Wrenches, we deliver the torque that sets the standard. And for more information on the calibration services and training we offer, talk to your Snap-on representative.

LOOKING FOR TORQUE?
Go to page 275 to view our entire Torque selection.

Overview.....N004
Specialized Tool Sets.....N007
Set Building Programs.....N014
Level 5™ Tool Control Systems.....N028
Portable Tool Cases.....N042
Laser Engravers, Drawer Control....N048

TOOL CONTROL

TOOL CONTROL

PUTTING YOU IN TOTAL CONTROL.

How do you get FOD under control? By getting tools under control. And Snap-on's integrated tool control programs are designed to put the power to eliminate FOD literally in your hands. From tethered tools and wall-mounted tool control boards, to our industry-leading Level 5™ Total Asset Management system, Snap-on offers critical industries the most comprehensive tool control solutions in the world. Increase safety, productivity and efficiency. Put an end to the dangers – and costs – associated with FOD. And let Snap-on put you in total control.

THIS IS HOW LEVEL 5 TAKES TOOL CONTROL TO A WHOLE NEW LEVEL:

LEVEL 1 – ORGANIZATION
A complete tool audit conducted by a Snap-on Industrial solutions expert helps define your tool control requirements. Match to the Snap-on tool storage products – from roll cabinets to carts – that best meet your needs, and add a specialized tool set designed for specific applications.

LEVEL 2 – VISIBILITY
A clear view of the tools you use enhances productivity. We make tools easier to see, reducing tool selection time and increasing accountability for their return. High visibility tool handle colors, custom color foam inserts, toolbox organizers, and pegboard raise the visual profile of tools.

LEVEL 3 – ACCESS CONTROL
Keyless Access Control to our tool storage units means your teams have access to just the tools they need. Configure the tool control to work with HID proximity badges, magnetic strip cards, barcode, and with or without a PIN. Proprietary software provides stand-alone or networked control.

LEVEL 4 – ASSET MANAGEMENT
Use our TCMAX® software system for fast, accurate, cost-effective asset management. It provides full reports on tools and assets, location, employee, restocking/ordering and more along with a full digital trail. Saves time and money with a well-organized sign-out and turn-in system.

LEVEL 5 – AUTOMATION
When human error is minimized, so is FOD and FME. Our Automated Tool Control handles control and tracking automatically through digital optical tool scans every time a drawer is accessed. Proprietary software immediately tracks tools used by part number and user.

CHOOSE YOUR LEVEL OF SECURITY

A complete tool control system designed to fit the level of the activity you need to control

LEVEL 1 – ORGANIZATION

Get organized with the right tools, stored the right way. A complete tool audit by your Snap-on Industrial tool and tool control expert helps define your tool and tool control requirements. Use the results to reset your tool inventory with new customized Snap-on tool sets. Consider a new tool storage unit to increase productivity in your workspace.

LEVEL 2 – VISIBILITY

Having a clear view of the tools you use enhances productivity in the workplace. Making tools easier to see reduces tool selection time and increases accountability for their return. High visibility tool handle colors, custom color foam inserts, toolbox organizers and pegboard, can raise the visual profile of tools as they are used and stored. The Snap-on Visual Tool Control cabinet provides the ultimate in tool visibility.

LEVEL 3 – ACCESS CONTROL

Effective tool control relies on ensuring that your teams have access to just the tools they need, when and where they need them. Keyless Access Control to Snap-on tool storage units is the solution. Configure to work with HID or iClass proximity badges, with or without using a PIN. Snap-on's proprietary software manages access at the individual user level, and allows either stand-alone or networked control.

LEVEL 4 – ASSET MANAGEMENT

Merging the benefits of speed, accuracy, and cost-effectiveness are the goals of tool control at an organizational level. Snap-on Tool Control offers TCMax Software, the simple, intuitive tool asset management solution. Simple, well-designed screens cover both issue and turn-in. You benefit from less paperwork and easier inventory processes. The result—increased productivity.

LEVEL 5 – AUTOMATION

When critical industry processes and concerns dictate elimination of Foreign Object Damage (FOD) and Foreign Material Exclusion (FME) problems, the solution is to minimize opportunity for human error. Let your toolbox handle the control and tracking automatically, through digital optical scans of your tools every time a drawer is accessed. Proprietary software provides immediate tracking and audit trails of tools used, by part and user. No need for bar codes, scanners, RFID tags, or other add-ons.

Snap-on® INDUSTRIAL

LEVEL 5 Tool Control System™

snapon.com/industrial 1.877.740.1900

Small Arms Repairman Tool Kit

SARTK2012

- Designed for bench and field repair of small armaments
- This kit offers maximum durability and mobility and can be deployable by a single maintainer
- Each removable drawer has customized foam inserts for tool control (as applicable for the purpose described, all materials meet Mil Specs AA-59315 and AA-59316)
- The tools and equipment are placed in an all-weather impact resistant mobile tool storage case (18"h x 24"w x 15"d)
  - Case material made with Zerust® corrosion inhibitor to help prevent tools from rusting
  - Telescoping trolley handle (36", 39" & 43")
  - Loaded drawers extend fully so entire contents of drawer can be easily viewed
  - Can open lid without having to flip the box over on its side
  - Meets/exceeds MIL810 & MIL1916
  - Service parts available
- 120 lbs. fully loaded which requires a two-person lift
- ALWAYS use safety glasses (GLASS20BK included in kit)

DRAWER CONFIGURATION

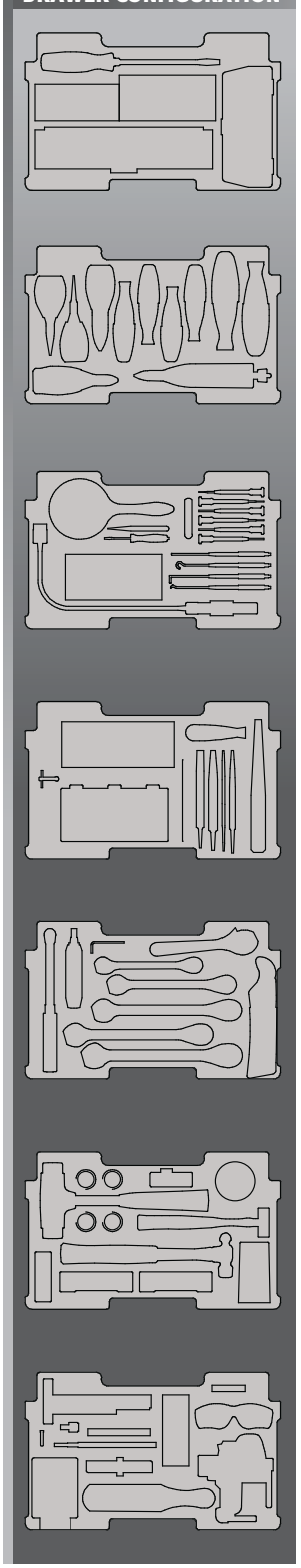

Stock No.	Description
JHWAPC-8A	Adjustable Wrench
T-SPK-4041B	¼" Rat Screw And Bit Set
95BCP	Pliers
PRH32	Rtn Rng Plir
T-17102	Brush File Cleaner
T-02357	Non Sparking Kit W/6 Tips
T-56809	Tape Measure ¾ × 1 × 16 Ft
T-226T	Gage Thickness .0015-.025 26Pc
T-FF334	3⁄8 × 4 Hlf Rnd Shrp 61463686380
BAH11700610	6" 3 Square File Cut 1
BAH9486041P	Plastic Handle No 4 1 Pack
GLASS20BK	Safety Glasses
BAH12300610	File 230 Round Batrd 6"
PRH12	Snp-Rg Plir
SGD8BR	8" Flat
T-24007	Center Punch 415-5⁄16 1⁄8 pt
RULER600	6" Eng Ruler
T-2365	Flashlight Flex Neck Led 56Lms
91ACP	Pliers
E703BCG	Needlenose Serrated
T-20502	Knurled Solid Punch 465-1⁄8
T-1LEC7	23 mm Ratchet Comb Wrench
PPC812B	Chisel
T-080000659	AR-15/M16 Rec Act Block Set
46ACP	Pliers
T-078015002	Front Adj Tool
SDD2240	Scrwdrvr
BAH12100610	File 210 Half Rd Bstd 6"
T-15065	Pin Punch ¼ - 5-¾" Oal
T-HF13	¼ × 3 Square Sharp 61463686590
T-HS4	3⁄16 × 4 Round Sharp 61463687045
T-03-0006	6 Pocket Pouch
T-20500	Knurled Solid Punch 465-1⁄16
BPN8B	Hammer
T-24001	Center Punch 415-5⁄16 5⁄32 pt
T-2502-02HSJ	Smooth Steel Jaws 2-½" Pr
PRH349	Snp-Rg Plir
T-BH-4	Bh-4 Brass 4 oz. Hammer
BAH11430610	File 143 Mill Bastard 6
BOER20	5⁄8" Ratcheting Comb Wr

Stock No.	Description
T-25181	8 pc 2mm–8mm Hex Keys
PRH34	Snp-Rg Plir
T-M0027BA	Tote Bag
BOER24	¾" Ratcheting Comb Wr
BOER28	7⁄8" Ratcheting Comb. Wrench
T-D-24	Drift Pin Non-Spark 10" Long
BAH26S-610	Stepped Tommy Bar 6 8 10 mm
PPR708K	Punch Set
T-25611	6 Pc 5⁄32–3⁄8 Hex Keys
BOER30	15⁄16" Ratcheting Comb. Wrench
T-HF43	½ × 3 Sq Sharp 61463686600
86CF	Diagonal Cutter
QD1R200	40–200 in. lb. torq.
TZK71	4-3⁄8" Point
T-K2006608KB	K resin plastic box
KMC18043NTN	18" All-wthr box 7drwr tan
T-D-20	Drift pin non-spark 6" long
T-084174250	Reflector tool chamber
T-25912	9Pc .050–3⁄16 Hex keys
T-HMC308	Block bench mechanics 3" dia
T-MUT	850212 Mut molle-usa brown box
T-03-0009	9 Pocket pouch
T-HF813	3 × ¼ round sharp 61463686800
T-2502	Vise bench clamp base 2-½"
PRH329	Rtn rng plir
T-15062	Pin punch 1⁄8 - 4-¾" oal
T-FF46	Square file fine 61463685450
T-58-0226	Scriber set
LST52586	Setof8:565a/b/c/d/e/f/g/hw/box
PRH129	Snp-rg plir
T-15063	Pin punch 5⁄32 - 5" oal
QDRIVER4P	4-40 in. lb. Torq screwdriver
IKCFM0000073	Foam set black/red
PR311	Wire twist
BAH24721400	12 Pcs 14 cm needle cut 0
BAH1936M1011	Doublehead box spanner 10/11 mm
T-77381499	Gp040123 4" hand magnif w/lit
T-080000659	Ar-15/m16 rec act block set
T-57-0357	Precision screwdriver set
T-9350033	Spanner wrench

⚠ WARNING

SPECIALIZED TOOL SETS

LEVEL 1

Portable Mechanics' Service Sets

General Maintenance Technician's Kit

- Mobile so that tools may be easily deployed to any jobsite – rain or shine
- Black over red tool control foam ensures an easy way to check for the presence or absence of tools
- Contains over 200 individual tools
- All Weather Mobile Tool Chest (AWMTC)

Features and Benefits:

- 22.1" wheel base on the wide corners for stability
- Innovative latch system for secure lid closure
- Telescoping trolley handle with higher reach
- Over-top hinged lid can be used as a seat when case is open
- Drawers fully extend on Snap-on's proprietary composite slides
- KMC18GMTK comes in a black AWMTC

KMC18GMTKG

KMC18GMTKG	KMC18GMTK
Includes 208 pieces	Includes 208 pieces
102 drive tools and sockets	102 drive tools and sockets
8 screwdrivers	8 screwdrivers
70 wrenches	70 wrenches
7 Pliers	7 Pliers
37 Miscellaneous tools	37 Miscellaneous tools
1 multimeter	1 multimeter
FOAM: IKCFM0000047	FOAM: IKCFM0000047
CASE: KMC18062NGR (green)	CASE: KMC18062NBK (black)

Maximum Mobility Tool Sets

- Designed specifically for the mechanic on the go
- Rapid tool acess and accountability helps protect valuable vehicles and equipment
- Snap-on tool control foam system measurably increases productivity
- Tools are furnished in custom foam and loaded into removable drawers
- Sets are offered in two configurations: tools only, or complete with tools, foam, and case

The extremely rugged and durable Pelican 0450 case features:

- Rugged trolley handle and wheels for easy and secure mobility
- Seven removable drawers plus foam tray in top of case
- Two automatic pressure equalization valves
- Water, temperature, drop, and impact resistant design and construction

9050VMTB

9050VMTB (pictured)	9060VMTB (not pictured)
• Includes 206 pieces:	• Includes 215 pieces:
• 102 drive tools and sockets	• 105 drive tools and ratchets
• 9 screwdrivers	• 10 screwdrivers
• 50 wrenches	• 60 wrenches
• 7 pliers	• 7 pliers
• 38 miscellaneous tools	• 33 miscellaneous tools
• 9050VMTB: Tool set, case & foam	• 9060VMTB: Tool set, case & foam
• 9050VMT: Tool set, tools only	• 9060VMT: Tool set, tools only
• VFI13365: Foam only	• VFI11750: Foam only

Contents subject to change. Consult your Snap-on Industrial Account Manager for up-to-date set contents.

SPECIALIZED TOOL SETS

General Mechanic's Tool Kit

Now available in choice of:
Metal tool chest KRA4059, tools & foam or New soft-sided tool bag with tools & foam

GMTK Tool Set includes:
Sockets 55
Wrenches 26
Pliers 6
Screwdrivers 5
Miscellaneous / Specialty Tools 50
Total = 142 tools

GMTKBOXWT Tool Set In Metal Tool Chest
Metal Tool Chest dimensions:
26"W x 17-3/16"H x 14-23/32"D

GMTKBOXWT

GMTKBAGWT Tool Set In Soft Sided Bag.
Take your tool control programs all the way to the work area, flightline, deployment or anywhere! User-friendly, lightweight & rugged.
- Tool pallets designed for outdoor use
- Improves tool control, FOD & productivity
- Satisfies the Army GMTK Specification
- Tool kits contain individual tool compartments
- Tool compartments include tool stock number for positive tool identification

Features of Soft-sided Bag:
- Easy to carry & easy to stow
- Zips open at top or end to allow individual tool pallets to be removed
- No sharp edges
- Rugged, heavy-duty materials can outperform & outlast metal
- Made from 100% polyester-coated Cordura
- Contains five individual tools pallets inside see-through, zippered, protective vinyl pouches

Security/Convenience Features:
- Two clear vinyl I.D. pockets – on outer surface – top and end
- Additional I.D. pockets–to contain tool inventory lists, pallet bills of material, DA form 2404, etc.
- Zippers align–for easy padlocking

Soft-sided bag available "Flightline Black"

GMTKTLBAGWT

PALLETS FROM SOFT-SIDED BAG

Standard Tool Sets

Stock No.	Description	Standard Color	Box/Bag Size (W x H x D)	Pallet Size (WxH)	Loaded with Tools* – Weight
A. GMTKBOXWT	General Mechanic's Tool Kit w/ tools & Foam in a 9 drawer KRA4059A Snap-on Metal Chest	Snap-on Red	26" x 14 23/32" x 17 3/16"	(See p. 74 for inner dim. on top chest)	107 lbs.
B. GMTKTLBAGWT	5 Pallet, General Mechanic's Tool Kit w/tools – Flightline Black	Flightline Black	24" x 18" x 11"	20" x 16"	67 lbs.

* Tool weight may vary.
Snap-on reserves the right to change tool content.

Standard Flightline Bags

Stock No.	Description
FLF8400	2 Pallet FOD Bag, Clamshell Open
FLF8200	4 Pallet FOD Bag, Clamshell Open
FLF8000	4 Pallet FOD Bag, Top Load
FLF8800	5 Pallet FOD Bag, Top/Side Load

Stock No.	Description
FLF8800W	5 Pallet FOD Bag, Top/Side Loan w/ Wheels
FOMFLFPLT	Foam FLF Bag Pallet
FLF16X20PLT	16" x 20" FLF FOD Bag Pallet

TOOL SETS & CUSTOM KITTING

LEVEL 1

Radioman Kit

TK2800

- Issued to individual Marine Corps electronic technicians
- Used to assist in the installation, assembly, disassembly, removal or modification of Communications-Electrical equipment in an unimproved environment
- Used by technicians in Marine Division (MARDIV), Marine Air Wing (MAW) and Marine Logistics Group (MLG) units authorized Field Level Maintenance
- Berry Amendment Compliant

Stock No.	Description
A2A	ADAPTOR
AHS300B	SPANNER WR
AHS301B	SPANNER WR
AHS304B	SPANNER WR
AHS307B	SPANNER WR
BHS13A	BLX13 SET
CTB5172	BATTERY PACK
CTC572	CHARGER
CTS561CLDB	CTS561CL LESS BATT LESS CHRGR
F80	⅜ RATCHET
F80	⅜ RATCHET
FS081	SOCKET
FS101	SOCKET
FS121	SOCKET
FS141	SOCKET
FS161	SOCKET
FS181	SOCKET
FS201	SOCKET
FS241	SOCKET
FSM101	SOCKET
FSM111	SOCKET
FSM121	SOCKET
FSM131	SOCKET
FSM141	SOCKET
FSM151	SOCKET
FSM71	SOCKET
FSM81	SOCKET
FSM91	SOCKET
FU8A	UNIV JT
FXK6	EXTENSION
GFAT1E	ADAPTOR
JHWAPC-10A	ADJUSTABLE WRENCH
KMC18001NGR	18IN ALL-WTHR BOX 1DRWR GREEN
MAGM2A01H	BLACK HOLSTER COMBO
MAGS2D106	MAG 2-D CELL-SILVER
OEXR10	5⁄16 RATCHET WRENCH
OEXR12	⅜IN 0 OFFSET RAT COMBO WRENH
OEXR14	7⁄16IN 0 OFFSET RAT COMB WRENH
OEXR16	½IN 0 OFFSET RAT COMB WRENCH
OEXR18	9⁄16IN 0 OFFSET RAT COMB WRENH
OEXR20	⅝IN 0 OFFSET RAT COMB WRENCH
OEXR24	¾IN 0 OFFSET RAT COMBO WRENH
OEXR8	¼IN RATCHET WRENCH

Stock No.	Description
OEXRM10	10MM 0 OFFSET RAT COMBO WRENCH
OEXRM11	11MM 0 OFFSET RAT COMBO WRENCH
OEXRM12	12MM 0 OFFSET RAT COMBO WRENCH
OEXRM13	13MM 0 OFFSET RAT COMBO WRENCH
OEXRM14	14MM 0 OFFSET RAT COMBO WRENCH
OEXRM15	15MM 0 OFFSET RAT COMBO WRENCH
OEXRM8	8MM 0 OFFSET RAT COMBO WRENCH
OEXRM9	9MM 0 OFFSET RAT COMBO WRENCH
PPC4A	PUNCH
PWC6	WIRE CRIMP
RKKMC18D1-1	SLIDE MEMBER SING DEEP SRW RT
RKKMC18D1-2	SLIDE MEMBER SING DEEP SRW LT
RKKMC18D2-1	SLIDE MEMBER DOUB DEEP DRW RT
RKKMC18D2-2	SLIDE MEMBER DOUB DEEP DRW LT
SDM12	BIT HOLDER
SDMM2702.5B	2.5MM HEX BIT
SDMM2702B	2MM HEX BIT
SDMM2703B	3MM HEX BIT
SDMM2704C	4MM HEX BIT
SDMM2705C	5MM HEX BIT
SDMM2706C	INSERT HEX BIT ¼ X 6MM
SDMM2708B	8MM HEX BIT
SGDMRC44B	SG RATCHETING.
SHD6R	HARD GRIP SD
SHDP63IRR	HARD GR PHILLIPS
SRPC7000	RING PLIERS
T-10910	R16 CURVED CLAW HAMMER
T-2100-7	ELECTRICIAN SCISSORS 5 ¼ OAL
T-2800DRW1	TK2800 MOLD 5561 DRW1
T-2800DRW2	TK2800 MOLD 5562 DRW2
T-2800DRW3	TK2800 MOLD 5563 DRW3
T-2800DRW4	TK2800 MOLD 5564 DRW4
T-2800DRW5	TK2800 MOLD 5565 DRW5
T-2800DRW6	TK2800 MOLD 5566 DRW6
T-2800DRW7	TK2800 MOLD 5567 DRW7
T-29SATS0401	4 PC SOLDERING AID SET
T-30019	RG9V PLIERS ROBOGRIP9 V-NOTCH
T-42558	FILE FLAT BASTARD 8 IN
T-42HV	SEIZER STRAIGHT NOSE ½ OAL
T-43058	FILE HALF ROUND BASTARD 8 IN
T-43HV	SEIZER CURVED NOSE 5 ½ OAL

Stock No.	Description
T-45290	45290 E-Z LOCK PLIERS
T-46058	FILE ROUND BASTARD 8 IN
T-57613	TAPE MEASURE 1 IN X 25 FT
T-7874B	DESOLDER PUMP SPRNG LOAD VACUM
T-831371	LEATHERMAN WAVE W/ MOLLE SHEATH
T-912787A	QRTER TURN FASTNR FLUSH
T-912788A	QRTER TURN FASTNR .37IN STDOFF
T-92015	SCREWDR PREC SLOTTED 1.5MM TIP
T-92020	SCREWDR PREC SLOTTED 2.0MM TIP
T-92025	SCREWDR PREC SLOTTED 2.5MM TIP
T-92030	SCREWDR PREC SLOTTED 3.0MM TIP
T-92110	SCREWDR PREC PHILLIPS NO.0
T-92111	SCREWDR PREC PHILLIPS NO.1
T-9-45309	45309 LOCKING PLIERS
T-CTS561CLG	CORDLESS SCWDRVR AND BIT SET
T-H52215XM	¼ IN HEX BIT 1.5MM
T-IA-1869	CRIMPER FOR R22 AND RJ11
T-IA-3974	CRIMPER RATCHET RJ45 RJ11
T-LT2	PICK UP TOOL 4LB CAP LIGHT
T-M0027BA	TOTE BAG
T-PA4006	PLIERS MINI DIAG CUTTER
T-PA4016	PLIERS MINI NEEDLE NOSE
T-PA4020	PLIERS MINI BENT NOSE
T-PA4028	PLIERS MINI LONG NOSE
T-PA4038	MINI END NIPPER PLIER - 4038
T-PA5016	PLRS LNG CHN NOS SD CT 6 ⅜L
T-PA5017	PLIERS CURVED NEEDLE NOSE 6OAL
T-PA5028	PLIERS LINEMNS RND NOSE 8 ½L
T-SN10994	SN10994 BALLDRIVER L WRENCH ST
T-ST2	SOLDERING TIP .093W X .75L
T-ST3	SOLDERING TIP .125W X .75L
T-ST4	SOLDERING TIP .187W X .75L
T-T8PCASE-SO	58992SO BLACK CASE W/ CLEAR LID
T-TK28002MLT	2MAN LIFT LABEL
T-TK2800HDLS	PUSH LABEL FOR TK2800 2.5x2.5
T-WP30	SOLDERING IRON 30WATT 120V
T-WP30HLDR	SOLDERING STAND
YA837A	SPRING CLAW

Snap-on Industrial offers a complete assortment of standard, specialized, and custom tool sets.

Consult your Snap-on Industrial Account Manager for more information

USPS Tool Sets from Snap-on Industrial

Snap-on Industrial now offers USPS Vehicle Maintenance Facilities the finest tool sets available in the industry. Featuring Snap-on® and Williams® branded products, these sets offer USPS repair facilities unprecendented quality, versatility, warranty, and service options. The optional foam tool inventory control system makes keeping track of tools easy and convenient, reducing tool loss and increasing productivity.

Developed exclusively for the needs of USPS vehicle repair facilities, this set represents the full Certified USPS Maintenance Tool Set.

Available as four components to suit each facility's unique needs:

Stock No.	Description
USPSTS-1	244 Piece Tool Set Only
KRA4114FPBO	4 Drawer Top Chest
KRA4107FPBO	7 Drawer Roll Cabinet
USPSTCF-1	Tool Control Foam Kit

This Set Contains a Full Assortment Of:

- Sockets
- Wrenches
- Screwdrivers
- Hammers
- Chisels
- Pliers
- Tool Storage Chests and Cabinets
- C-Clamps
- Scrapers
- Locking Pliers
- Snap-ring Pliers
- Hex Keys
- Specialty Tools
- and more...

Snap-on Power and Hand Tools

Snap-on offers the most complete assortment of power and hand tools in the industry. The company that invented the original socket and ratchet in 1920 now brings you everything necessary to repair a motorized vehicle in the 21st century.

Products include:

- Hand Tools
- Pneumatic and electric power tools
- Torque wrenches & calibration systems
- Automotive specialty tools
- Jacks and hydraulic equipment
- Pullers
- Engine diagnostic analyzers
- Charging and starting system testers
- Tire changers
- Brake lathes and testers
- Antifreeze recycling systems
- and much more...

Snap-on Foam Tool Control Systems

Tool Control from Snap-on Industrial is the most sophisticated and comprehensive Tool Control System in the world. From stationary installations to portable tool boxes in road service vehicles, Snap-on offers solutions for every application. Our optional foam tool control system allows the USPS tool set to be custom fit into the tool boxes. Includes foam panels, with a form-fit cutout for each tool in the set.

Contents subject to change. Consult your Snap-on Industrial Account Manager for up-to-date set contents.

WARNING

SPECIALIZED TOOL SETS

LEVEL 1

Industrial Maintenance Tool Sets

Master Maintenance Service Kit

4338GS Tools Only. Own the variety of essential hand and power tools necessary to perform most maintenance operations safely and efficiently. Kit includes all the tools in the General and Intermediate Kits, plus Larger pinch bars, Hammers, Adjustable Spanner Wrenches, C-Clamps, 3/4" Dr. 12-Point Shallow Sockets to 2-3/8", 3/4" Dr. Extensions and Ratchet, 1/2" Dr. Shallow and Deep Impact sockets 1", Combination Wrenches to 1-1/2", Extended Locking Pliers, Snap Ring Pliers and 1/2" Dr. Turbo Sockets to 1".

Intermediate Maintenance Service Kit

4264GS. Have the tools on hand to quickly solve difficult maintenance problems and reduce costly down time. Kit includes all the items in the General Maintenance Kit, plus 3/8" Dr. 8-Point Sockets and Accessories, Feeler Gauges, 3/8" Dr. Impact Sockets (shallow) to 7/8", 3/8" Dr. Impact sockets Deep 6-Point to 3/4", Ratchet Wrenches, Flare Nut Wrenches to 1", 1/2" Dr. 12-Point Deep Sockets to 1-1/8", 1/2" Dr. Hex Sockets, 3/8" Dr. 6-Point Deep Impact Sockets to 3/4", 1/2" Dr. 8-Point Sockets, Box Wrenches, 12-Point to 1-5/16", Open End Wrenches to 1-5/16", Expanded Punches, Hole Saw Kit, chisels and Pliers.

General Maintenance Service Kit

4161GS Tools only. Kit includes 3/8" Dr. Hex Drivers, Universals to 3/4". Combination Wrenches to 1", expanded punch sizes, 1/2" Dr. Ratchet, Extensions, Breaker Bar, 1/2" Dr. Shallow 12 point Sockets to 1-5/16", Open End Wrenches to 1-5/16", Box Wrenches to 9/16", 1/4" Dr. 12-Point Deep Sockets to 9/16", Nut Drivers and expanded pliers.

Metric Set Building

Nothing else gets the job done as safely and efficiently as having the right tools and having them when needed. To assist you in bringing this about, our many years of close association with the industry have been consolidated into these expertly compiled add-on sets.

4000 Series Metric Add-On 4102GM1

4000 Series Metric Add-On Set 1

4102GM1. Build on your existing metric set to achieve a complete inventory of metric tools essential for servicing today's industrial maintenance needs. Set includes: Metric Nut drivers, L-Type Hex Wrenches, 1/4" Dr. 12-Point Deep and Shallow Sockets to 14mm, 3/8" Dr. 12-Point Deep and Shallow Sockets to 19mm, 12-Point Combination Wrenches to 22mm, Standard sizes in the Four-Way Angle Head Wrenches, Double End Flare Nut Wrenches, and Box Wrenches. Hex Socket Drivers are also included.

4000 Series Metric Add-On Set 2

4086GM2. Expand your metric tool inventory with this set including 12-Point Ratcheting Box Wrenches, Open End Wrenches to 32mm, 3/8" Dr. 6-Point Deep and Shallow Impact Sockets to 24mm, 1/2" Dr. 12-Point Shallow Sockets to 32mm, 1/2" Dr. 6-Point Deep and Shallow Impact Sockets and 1/2" Dr. 12-Point Metric Sockets. We have also expanded the 12-Point Combination Wrenches, Four-Way Angle Head Wrench line, along with the 12-Point Offset Box Wrench Set. The 1/2" Dr. Hex Socket Set has also been added to complete this set.

4000 Series Maintenance Add-On Set

4023GSACC

Our Maintenance Accessory Add-On Set includes Tap and Dies, Rethreading Tap and Dies, Extractors, Pipe Wrenches, Strap Wrenches, Awls, Nut Splitter, Ruler, Mirror and Pick Up Tools. In this kit we have also expanded the Files, Pliers (Snap Ring), Scrapers, Pry Bars, Saws and Hammers.

Contact your Snap-on Account Manager to choose your Roll Cab and to add a custom foam insert.



4000 Series Maintenance Add-On Set

WPGENERAL-1

General Service Wind Power Tool Set

- Ideal selection of high-quality tools for general service in and around the wind farm
- 106 piece tool set comes in a rugged, waterproof, and virtually unbreakable hard case, packed in tool-control foam

Contents include:

- 1/4" drive SAE shallow & deep sockets and drive tools
- 3/8" drive SAE deep and shallow sockets and drive tools
- 5 piece screwdriver set
- Midget, combination, and ratcheting box wrenches
- 5 pair of pliers
- Hammers, punches, hacksaw, and more...

WPGENERAL-1

434HDC

434HDC

3/4" Drive Socket Set w/Case and Foam insert

- Flank Drive® wrenching system provides superior gripping power
- Tools precision-crafted from special alloy steel for strength and durability
- Nickel Chrome finish is easy to clean and helps protect against corrosion
- Portable, weather-resistant case features a retractable handle and rugged wheels• 5 pair of pliers
- Durable foam insert holds tools securely
- Applications: Oil & Gas Industries, Heavy Duty Fleet, General Industry, Military

Set Components

Stock No.	Description
LDH242	3/4"
LDH262	13/16"
LDH282	7/8"
LDH302	15/16"
LDH312	31/32"
LDH322	1"
LDH342	1-1/16"
LDH362	1-1/8"
LDH382	1-3/16"

Stock No.	Description
LDH402	1-1/4"
LDH422A	1-5/16"
LDH442	1-3/8"
LDH462	1-7/16"
LDH482	1-1/2"
LDH502	1-9/16"
LDH522	1-5/8"
LDH542	1-11/16"
LDH562	1-3/4"

Stock No.	Description
LDH582	1-13/16"
LDH602	1-7/8"
LDH642	2"
LDH662	2-1/16"
LDH682	2-1/8"
LDH702	2-3/16"
LDH722	2-1/4"
LDH762	2-3/8"
L32	3" Extension

Stock No.	Description
L62	8" Extension
L122	16" Extension
L52B	Sliding Head
L872	Ratchet Head
L82A	Universal Joint
L8112A	Breaker Bar Head
L672B	Ratchet Adapter
L872H	19-1/4" Handle
PB434HD	Case w/ foam only

⚠ WARNING

SET BUILDING

U.S. Sets

An Unequaled Opportunity

When we introduced our set building program it revolutionized the industry — for the first time there was a planned way to expand tool sets as work and responsibilities evolved and grew. It is designed to provide the most used tools in the most likely progression. And as metric tools became the standard in the industry, we began offering a greatly expanded metric selection with a master set that tops anything else available. Ask your Snap-on® Industrial Account Manager for more information on how you can build exactly the right tool set for your specific needs.

How the Program Works

If you're building a set from the ground up, start with our 9100GSBO Apprentice Set. It includes a balanced selection of 1/4", 3/8" and 1/2" square drive tools, wrenches, screwdrivers, pliers, punches and chisels — a basic set for routine maintenance. We've also put increased emphasis on getting you all the metric tools you need, as they are increasingly becoming the standard in many industries.

When your needs grow, the second tool group provides more than 100 additional standard and specialty tools for more advanced work. Each new tool group offers recommendations on the appropriate storage chests and cabinets to help you stay organized and productive. Through this method of steady, planned expansion, you can continue building your tool set until you've achieved the ultimate selection of matched hand tools and storage units.

9100GSBO

U.S. Apprentice Set

9100GSBO Complete Apprentice Set.
- Includes 9100GSO and KRA2055FPBO top chest

9100GSO Apprentice Set.
- More than 100 pieces for a well-balanced selection
- Does not include tool storage

9100GSM Metric Plus Apprentice Set.
- 9100GS set plus AWM110DK metric hex wrench Set (11 pcs), 212FMY Metric 12-point socket Set (12 pcs) and OEXM710B metric 12-point combination wrench set (10 pcs)
- Does not include tool storage

9200GSB

U.S. Set 2

9200GSB Complete U.S. Set 2.
- Includes 9100GSO, 9000GS2 plus KRA4059FPBO top chest

9200AGSO U.S. Set 2
- More than 200 pcs: includes all tools in 9100GSO and 9000GS2
- Does not include tool storage

9000GS2 Add-on Group 2
- More than 100 pcs in the add-on to 9100GSO apprentice set
- Does not include tool storage

Warning: In the set illustrations on this page and following pages, storage unit drawers are shown open for display purposes only. In use, storage unit could tip and cause injury or damage if a number of loaded drawers are extended.

U.S. and metric set cabinetry and contents are subject to change and may not be exactly as illustrated. U.S. set listings are shown on pages N018 and N019. Metric sets are shown on pages N020 and N021. Metric listings are shown on pages N022 and N023.

U.S. Sets

U.S. Set 3

9300GSBO Complete U.S. Set 3.
- Includes 9200AGSO, 9000GS3O plus KRA4059FPBO top chest and KRA4008FPBO roll cab

9300GSO U.S. Set 3.
- More than 300 pcs: includes all tools in 9200AGSO and 9000GS3O
- Does not include tool storage

9000GS3O Add-on Group 3.
- More than 100 pcs in the add-on to 9200AGSO U.S. Set 2
- Does not include tool storage

9300GSBO

U.S. Set 4

9400GSBO Complete U.S. Set 4
- Includes: 9300GSO, 9000GS4O plus KRL751PBO top chest and KRL756CPBO roll cab

9400GSO U.S. Set 4
- More than 600 pcs: includes all tools in 9300GSO and 9000GS40
- Does not include tool storage

9000GS4O Add-on Group 4
- More than 250 pcs in the add-on to 9300GSO U.S. Set 3
- Does not include tool storage

9400GSBO

⚠ WARNING

- Do not open more than one loaded drawer at a time
- Keep children away
- Close lid, lock drawers and doors before moving
- Apply brakes on locking casters when not moving unit
- Do not step in or on drawers
- Secure units together with fasteners
- Do not pull; push to move
- Wear gloves when lifting by edges
- Keep feet and fingers clear of edges when stacking, hanging, or moving units
- Read additional safety precautions on pages W1 to W4

U.S. Sets

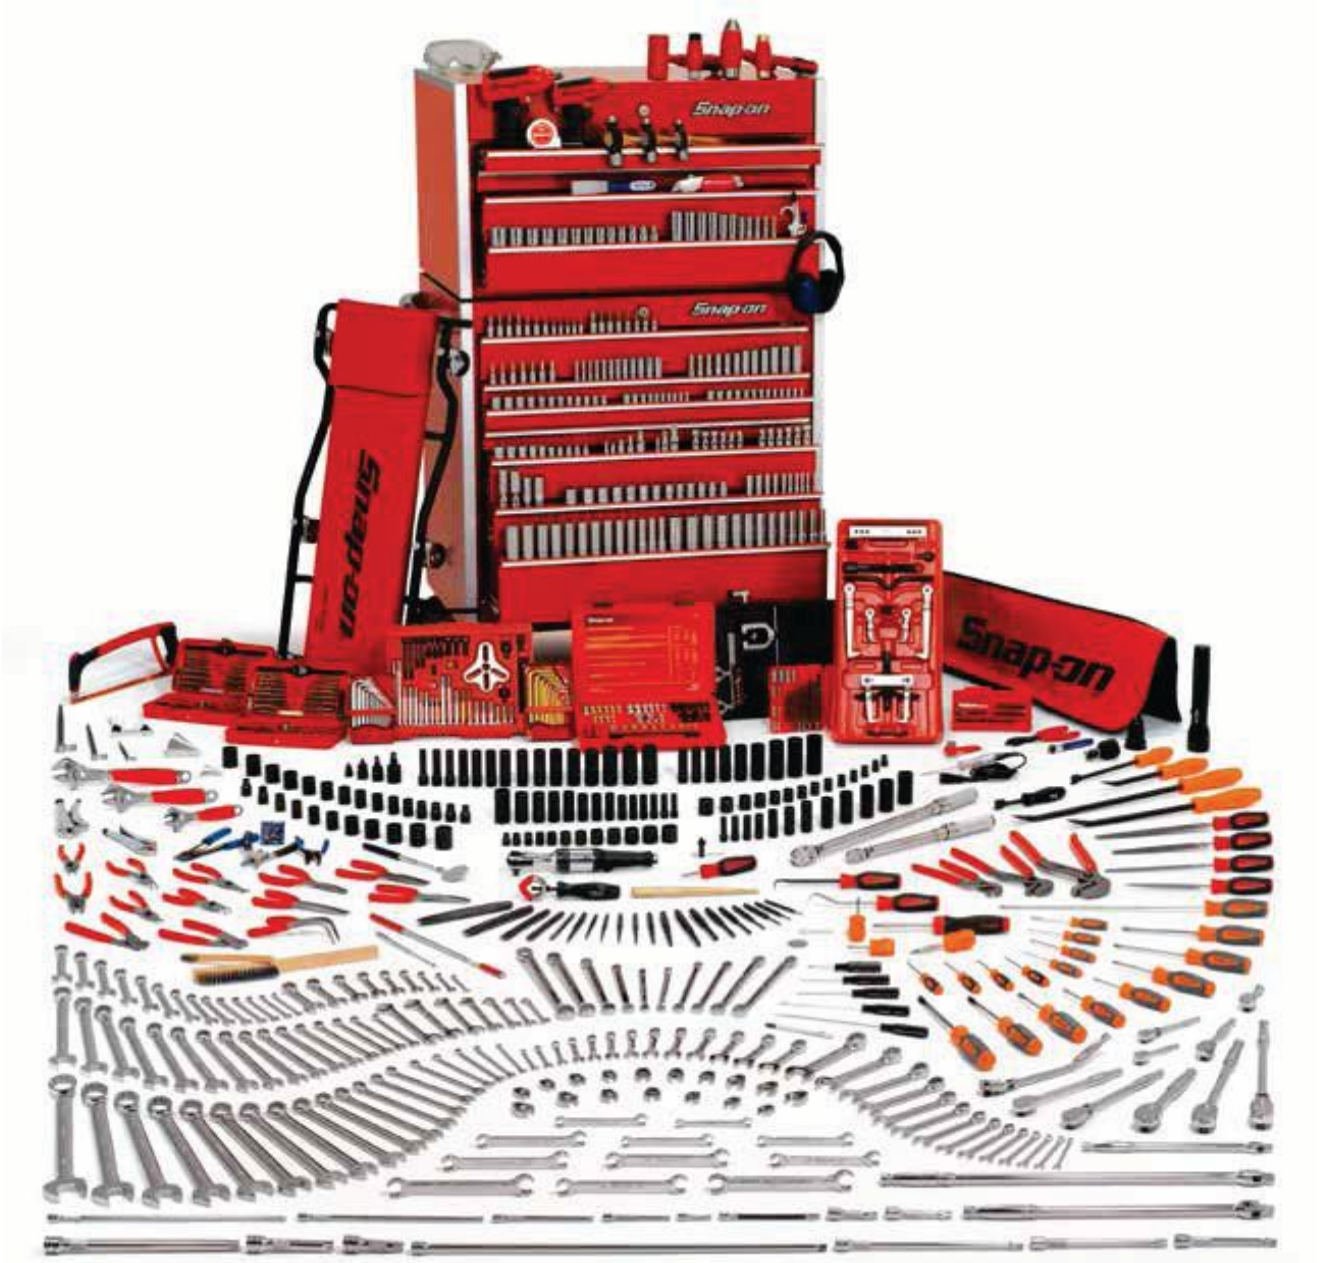

9500GSBO

U.S. Set 5

9500GSBO Complete U.S. Set 5.
- Includes 9400GSO, 9000GS5O plus KRL751PBO top chest and KRL756CPBO roll cab

9500GSO U.S. Set 5.
- More than 800 pcs: includes all tools in 9400GSO and 9000GS50
- Does not include tool storage

9000GS5O Add-on Group 5.
- More than 150 pcs in the add-on to 9400SGO U.S. Set 4
- Does not include tool storage

Warning: In the set illustrations on this page and following pages, storage unit drawers are shown open for display purposes only. In use, storage unit could tip and cause injury or damage if a number of loaded drawers are extended.

U.S. and metric set cabinetry and contents are subject to change and may not be exactly as illustrated. U.S. set listings are shown on pages N018 and N019. Metric sets are shown on pages N020 and N021. Metric listings are shown on pages N022 and N023.

9600GSBO

U.S. Set 6

9600GSBO Complete U.S. Set 6.
- Includes 9500GSO, 9000GS6O plus KRL791APBO top chest, KRL722BPBO roll cab and KRA276D wall cabinet

9600GSO U.S. Set 6.
- More than 1,000 pcs: includes all tools in 9500GSO and 9000GS6O
- Does not include tool storage

9000GS6O Add-on Group 6.
- More than 250 pcs in the add-on to 9500GSO U.S. Set 5
- Does not include tool storage

⚠ WARNING

- Do not open more than one loaded drawer at a time
- Keep children away
- Close lid, lock drawers and doors before moving
- Apply brakes on locking casters when not moving unit
- Do not step in or on drawers
- Secure units together with fasteners
- Do not pull; push to move
- Wear gloves when lifting by edges
- Keep feet and fingers clear of edges when stacking, hanging, or moving units
- Read additional safety precautions on pages W1 to W4

U.S. Sets Contents

9100GSO Apprentice Set

Stock No.	Description	Page
114ATMP	¼" Dr. General Service Set, 6-Point (14 pcs)	126
206EAU	⅜" Dr. Adaptor/Extension Set (6 pcs)	144
211FSY	⅜" Dr. Socket Set, 6-Point (11 pcs)	146
211SFSY	⅜" Dr. Deep Socket Set, 6-Point (11 pcs)	148
317MSPC	½" Dr. General Service Set, 6-Point (17 pcs)	209
91ACP	Adjustable Joint Pliers, 9 ¼"	337
AW1015DK	Hex Wrench Set (10 pcs) (7/250" to ⅜")	270
BP16B	Ball Peen Hammer, 16 oz.	356
CSA8C	Carbon Scraper	365
ECF201A	3 Watt, (2) D Cell, LED Flashlight	—
F80	⅜" Dr. Sealed Head Ratchet	138
GA295	Round Mirror (2 ¼" Diameter)	683
GAC1580	Goggles	731
HBPT16	Plastic Tip Hammer	355
HSG319	Deluxe Hacksaw (for 12" blades)	358
OEX709B	Combination Wrench Set, 12-Point (9 pcs)	244
PL300CF	Needle Nose/Diagonal Cutter/Pliers Set, 3 pcs.	334
PPC710BK	Punch and Chisel Set, 11 pcs	351
PRH57A	Retaining Ring Pliers	340
PT5C	Magnetic Pick Up Tool	682
PWC6	Wire Stripper/Cutter, 6"	344
SHDX800	Combination Screwdriver Set (8 pcs)	304
TPMA12	Tape Rule, U.S. (12')	680

9000GS2 Add-on Group

Stock No.	Description	Page
110STMY	1/4" Dr. Deep Socket Set, 6-Point (10 pcs)	111
112TMMY	1/4" Dr. Metric Shallow Socket Set, 6-Point (12 pcs)	110
2004BSKA	Battery Service Kit (4 pcs)	614
212EFTXY	1/4" and 3/8" Dr. Torx® Driver Set (12 pcs)	117
212FSMY	3/8" Dr. Metric Shallow Socket Set, 6-Point (12 pcs)	146
212SFSMY	3/8" Dr. Metric Deep Socket Set, 6-Point (12 pcs)	147
97CCP	Needle Nose Pliers, 8"	
1650	Prybar, 16"	332
AC5B	Hand Scratch Brush	738
AWM110DHK	Metric Hex Wrench Set, L-Shaped	270
CT4G	Circuit Tester	518
FADH12A	Adjustable Wrench, Cushion Handle, 12"	272
FB303B	Wire Gap Gauge	678
FB316B	Spark/Ignition Gauge (18 blades)	677
FB325A	U.S./Metric Gauge (25 blades)	677
FB361A	Gapper Gauge	678
FLF80	3/8" Dr. Long Flex Head Sealed Ratchet	138
FXK11	3/8" Dr. Extension, 11"	143
GSAF1E	Square Drive Adaptor	108
LP10WR	Locking Pliers, 10"	338
OEX30B	Std. Length Combination Wrench, 15/16"	244
OEX32B	Combination Wrench, 12-Point, 1"	244
OEXM710B	Metric Combination Wrench Set (10 pcs)	243
PK53	Putty Knife/Scraper	366
RXFS605B	3/8" Dr. Double End Flare Nut Wrench Set (5 pcs)	257
S9704KR	3/8" Dr. Spark Plug Retention Socket, 6-Point, 13/16"	174
S9706KRA	Spark Plug Retention Socket, 6-Point, 5/8"	372
SGA173BR	Radiator Hose Pick	432
SGASA204A0	Miniature Pick Set, 4 pcs	328
SGDMRC44B	Ratcheting Soft Grip Screwdriver	314
SGT4BR	1/4" Dr. Standard Shank Driver	106
TMXK60	1/4" Dr. Extension, 6"	108

9000GS3O Add-on Group

Stock No.	Description	Page
112STMMY	¼" Dr. Metric Deep Socket Set, 6-Point (12 pcs)	111
207EFAMY	⅜" Dr. Metric Hex Driver Set (7 pcs)	157
208EFAY	⅜" Dr. Hex Driver Set (8 pcs)	158
309SIMYA	½" Dr. Deep Impact Socket Set, 6-Point	202
310IMMYA	½" Dr. Metric Shallow Impact Socket Set, 6-Point	200
310SIMMYA	½" Dr. Metric Deep Impact Socket Set, 6-Point	202
311IMYA	½" Dr. Shallow Impact Socket Set, 6-Point	201
313TWMYA	½" Dr. Metric Socket Set, 6-Point (13 pcs)	191
AC58D	Wire Brush	738
GA3000A	Ear Protectors	729
IP80D	½" Dr. Impact Universal Joint	199
JCK7D	Fender Cover	670
JT13A	Blow Gun	504

9000GS3O Add-on Group cont.

MG725	½" Dr. Impact Wrench	464
OEXM6B	Metric Short Combination Wrench, 12-Point, 6mm	246
OEXM7B	Metric Short Combination Wrench, 12-Point, 7mm	246
OEXM8B	Metric Short Combination Wrench, 12-Point, 8mm	246
OEXM9B	Metric Short Combination Wrench, 12-Point, 9mm	246
QD3R250	½" Dr. Torque Wrench, 50-250 ft. lb.	279
RXFMS606B	Metric Double End Flare Nut Wrench Set (6 pcs)	257
S8	½" Dr. Universal Joint	109
SL80	½" Dr. Long Handle Sealed Ratchet	185
SPBS240	Prybar with Handle, 24", Orange	330
SXK3	½" Dr. Extension, 3 ½"	189
TF72	¼" Dr. Flex Head Sealed Ratchet	103
TMXK140	¼" Dr. Extension, 14"	108

9000GS4O Add-on Group

Stock No.	Description	Page
1250	Prybar, 12"	332
206AFSA	⅜" Dr. Universal Shallow Socket, 12-Point (6 pcs)	149
206FSUMA	⅜" Dr. Metric Universal Shallow Socket Set, 6-Point (6 pcs)	149
207SFRH	⅜" Dr. Metric Crowfoot Wrench Set (7 pcs)	260
210FRHMA	⅜" Dr. Metric Crowfoot Wrench Set (10 pcs)	260
313TSYA	½" Dr. Deep Socket Set, 6-Point (13 pcs)	192
388CF	High Leverage Cutters	335
61ACP	Duck Bill Pliers	336
AWP160	Adjustable Joint, Tongue & Groove Pliers	337
BP24B	Ball Peen Hammer, 24 oz.	356
CJ2001P	Bolt Grip Puller Set	393
CSA12CO	Carbon Scraper, Orange	365
E1020	Extractor Set, 20 pcs	383
FADH8A	Adjustable Wrench, Cushion Handle, 8"	272
FL80	⅜" Dr. Long Handle Sealed Ratchet	138
FX24A	⅜" Dr. Extension, 24"	143
FXK4	⅜" Dr. Extension, 4"	143
FXK8	⅜" Dr. Extension, 8"	143
HBBD32	Ball Peen Dead Blow Hammer, 32 oz.	5
HBFE32	Dead Blow Hammer, 32 oz.	5
JCW60R	Creeper, Red	671
LP7WR	Locking Pliers, 7"	338
OEX080B	Short Combination Wrench, 12-Point, ¼"	247
OEX10B	Combination Wrench, 12-Point, 5/16"	244
OEX34B	Combination Wrench, 12-Point, 1 1/16"	244
OEX36B	Combination Wrench, 12-Point, 1 1/8"	244
OEX40B	Combination Wrench, 12-Point, 1 ¼"	244
OEXM200B	Metric Combination Wrench, 12-Point, 20mm	243
OEXM210B	Metric Combination Wrench, 12-Point, 21mm	243
OEXM220B	Metric Combination Wrench, 12-Point, 22mm	243
OEXS709B	Short Combination Wrench Set, 12-Point (9 pcs)	247
OEXSM710B	Metric Short Comb. Wr. Set, 12-Point (10 pcs)	246
PPB1012A	Bronze Tapered Punch, ⅜"	352
PPC104A	Pin Punch, ⅛"	351
PPC108A	Pin Punch, ¼"	351
PPC204A	Starter Punch, ⅛"	351
PPC208A	Starter Punch, ¼"	351
PPC3A	Center Punch, ⅛"	351
PPC5A	Punch/Chisel Holder	351
SGCP1BR	Cotter Pin Puller	588
SGHBF500A	File Set with Handles (4 pcs)	363
SHDX400	Mini Combination Screwdriver Set, Orange	304
SN24C	½" Dr. Breaker Bar, 24"	187
SPBS180	Prybar w/Handle, 18" Orange	330
SRPC105	Retaining Ring Pliers Set (5 pcs)	339
SSM5A	Flat Tip Screw Starter	317
SX2	½" Dr. Extension, 2"	189
TA3	¼" to ⅜" Adaptor	109
TD2425	Tap and Die Set (41 pcs)	377
TDM117A	Metric Tap and Die Set (41 pcs)	377
TF528D	Tube Cutting and Double Flaring Set	14
TM61A	¼" Dr. Flexible Extension, 6"	108
TMX1	¼" Dr. Extension, 1 ¼"	108
TMXK110	¼" Dr. Extension, Knurled, 11"	108
UTK100	Utility Knife	361

U.S. and metric set cabinetry and components are subject to change and may not be exactly as illustrated. U.S. sets are shown on pages N014-N017. Metric sets are shown on pages N020 and N021. Metric listings are shown on pages N022 and N023.

9000GS50 Add-on Group

Stock No.	Description	Page
196CF	Needle Nose Pliers with Side Cutter, 7 1/8"	336
212IMFYA	3/8" Dr. Shallow Impact Socket Set, 6-Point (12 pcs)	163
212SIMFYA	3/8" Dr. Deep Impact Socket Set, 6-Point (12 pcs)	164
214IMFMYA	3/8" Dr. Shallow Impact Socket Set, 6-Point (14 pcs)	163
214SIMFMYA	3/8" Dr. Deep Impact Socket Set, 6-Point (14 pcs)	164
313TSMYA	1/2" Dr. Metric Deep Socket Set, 6-Point (13 pcs)	192
497CCP	Needle Nose Pliers (90° Angle Jaw) 6 5/8"	336
650	Prybar, 6"	332
AWP120	Adjustable Joint, Tongue & Groove Pliers	337
BP8B	Ball Peen Hammer, 8 oz.	356
C2201A	Kit Bag	392
CJ2002	Bar Type Gear Puller Set	142
F12LA	3/8" Dr. Breaker Bar	272
FADH10A	Adjustable Wrench, Cushion Handle, 10"	464
FAR7200	Super Duty Air Ratchet, 3/8" Drive	138
FBF80	3/8" Dr. Bent Flex Head Sealed Ratchet	138
FK80	3/8" Dr. Stubby Head Sealed Ratchet	355
HBBT24	Bronze Tip Hammer, 24 oz.	200
IMM200	1/2" Dr. Metric Shallow Impact Socket, 6-Point, 20mm	200
IMM210	1/2" Dr. Metric Shallow Impact Socket, 6-Point, 21mm	200
IMM220	1/2" Dr. Metric Shallow Impact Socket, 6-Point, 22mm	200
IMM230	1/2" Dr. Metric Shallow Impact Socket, 6-Point, 23mm	200
IMM240	1/2" Dr. Metric Shallow Impact Socket, 6-Point, 24mm	162
IPF800B	3/8" Dr. Impact Universal Joint	351
MG325	3/8" Dr. Air Impact Wrench	464
OEX11B	Combination Wrench, 12-Point, 11/32"	244
OEX260B	Short Combination Wrench, 12-Point, 13/16"	247
OEX280B	Short Combination Wrench, 12-Point, 7/8"	247
OEX300B	Short Combination Wrench, 12-Point, 15/16"	247
OEX320B	Short Combination Wrench, 12-Point, 1"	247
OEX38B	Combination Wrench, 12-Point, 1 3/16"	244
OEX42B	Combination Wrench, 12-Point, 1 5/16"	244
OEX8B	Combination Wrench, 12-Point, 1/4"	244
OEXM230B	Metric Standard Combination Wrench, 12-Point, 23mm	243
OEXM240B	Metric Standard Combination Wrench, 12-Point, 24mm	243
OEXM90B	Metric Standard Combination Wrench, 12-Point, 9mm	243
OXI10B	Midget Combination Wrench, 12-Point, 5/16"	248
OXI12B	Midget Combination Wrench, 12-Point, 3/8"	248
OXI706B	Fractional Midget Comb. Wrench Set, 12-point (6 pcs)	248
OXI8B	Midget Combination Wrench, 12-Point, 1/4"	248
OXIM710B	Metric Midget Comb. Wrench Set, 12-Point (10 pcs)	247
OXIM7B	Metric Midget Combination Wrench, 12-Point, 7mm	247
OXIM8B	Metric Midget Combination Wrench, 12-Point, 8mm	247
OXIM9B	Metric Midget Combination Wrench, 12-Point, 9mm	247
PPC110A	Pin Punch, 5/16"	351
PPC112	Pin Punch, 3/8"	351
PPC210A	Starter Punch, 5/16"	351
PPC824B	Flat Chisel, 3/4"	351
PPC828B	Flat Chisel, 7/8"	351
PT28E	Pick Up Tool	682
PWC14	Wire Stripper/Cutter/Crimper/Bolt Cutter, 8 3/4"	344
QD2R100	3/8" Dr. Adj. Click Type Torque Wrench 20-100 ft. lb.	279
RTD48	Rethreading Kit (48 pcs)	19
S9704KFUA	3/8" Dr. Spark Plug Universal Socket, 13/16"	173
S9706KRFUA	3/8" Dr. Universal Spark Plug Socket, 6-Point, 5/8"	372
SDM400A	Screwdriver Bit Kit (37 pcs)	316
SF80	1/2" Dr. Flex Head Sealed Ratchet	185
SHDP162O	Phillips® Tip Screwdriver, #2, Orange, 16"	307
SHDP62IR0	Phillips® Tip Screwdriver, #2, Orange, 6"	307
SHDP63IR0	Phillips® Tip Screwdriver, #3, Orange, 6"	307
SIMM200	1/2" Dr. Deep Impact Socket, 6-Point, 20mm	202
SIMM210	1/2" Dr. Deep Impact Socket, 6-Point, 21mm	202
SIMM220	1/2" Dr. Deep Impact Socket, 6-Point, 22mm	202
SIMM230	1/2" Dr. Deep Impact Socket, 6-Point, 23mm	202
SIMM240	1/2" Dr. Deep Impact Socket, 6-Point, 24mm	202
SPBS120	Prybar with Handle, 12", Orange	330
SSDE42C	Flat, Thin Blade Electronic Screwdriver	308
SSDE43C	Flat, Thin Blade Electronic Screwdriver	308
SSDE44C	Flat, Thin Blade Electronic Screwdriver	308
SSDE46C	Flat, Thin Blade Electronic Screwdriver	308
SSDE48C	Flat, Thin Blade Electronic Screwdriver	308
SSDMR1AO	Ratcheting Magnetic Screwdriver, Orange	315
TC123C	Tube Cutter	13
VS807B	Open End Wrench Set (7 pcs)	256
XB605A	Fractional Offset Box Wrench Set, 12-Point (5 pcs)	250
XBM605A	Metric Box End Wrench Set, 12-Point (5 pcs)	249

9000GS60 Add-on Group

Stock No.	Description	Page
106ATMXWP	1/4" Dr. Wobble Extension Set (6 pcs)	108
106TMUSA	1/4" Dr. Universal Socket Set, 6-Point (6 pcs)	114
10SSD	Offset Flat Tip Screwdriver	311
110ETMAY	1/4" Dr. Hex Driver Set (10 pcs)	120
120SSDP	Offset Phillips® Screwdriver, #1 and #2	311
2050	Prybar, 20"	332
205IPF	Frac. 3/8" Dr. Swivel Impact Socket Set, 6-Point (5 pcs)	165
206AFXWP	3/8" Dr. Wobble Plus Extension Set (6 pcs)	144
20SSD	Offset Flat Tip Screwdriver	311
307IPLY	Frac. 1/2" Dr. Impact Swivel Socket Set, 6-Point (5 pcs)	204
AWP45	Adjustable Joint, Tongue & Groove Pliers, 4 3/4"	84
AWP65	Adjustable Joint, Tongue & Groove Pliers, 7"	—
BP12B	Ball Peen Hammer, 12 oz.	337
CHN480	Adjustable Joint Pliers, 20"	337
CJ2003A	Rear Axle Puller Set	356
CJ2004	Interchangeable Puller Set	—
CJ2005	Puller Accessory Set	392
CM6551	Miniature Screwdriver Set (5 pcs)	392
DBTR129	Drill Bit Set, 29 Bits	392
E703BCG	Electronic Needle Nose Pliers	311
E704BCG	Elec. Needle Nose Pliers, 60° Bent Tip, Non-Serrated	450
E710BCG	Electronic Taper Head Cutters, True Flush Cut	341
FADH6A	Adjustable Wrench, Cushion Handle, 6"	341
FAR25A	1/4" Dr. Air Ratchet	342
FS12B	3/8" Dr. Universal Shallow Socket, 6-Point, 3/8"	272
FSUM11A	3/8" Dr. Universal Shallow Socket, 6-Point, 11mm	464
FSUM16A	3/8" Dr. Universal Shallow Socket, 6-Point, 16mm	149
FSUM18A	3/8" Dr. Universal Shallow Socket, 6-Point, 18mm	149
FSUM19A	3/8" Dr. Universal Shallow Socket, 6-Point, 19mm	149
FX18	3/8" Dr. Extension, 18"	149
FX36	3/8" Dr. Extension, 36"	149
HBF100	Mixed File Set (6 pcs)	143
HBFE48	Dead Blow Hammer, 48 oz.	143
IMTM10A	1/4" Dr. Shallow Impact Socket, 6-Point, 5/16"	5
IMTM12A	1/4" Dr. Shallow Impact Socket, 6-Point, 3/8"	122
IMTM14A	1/4" Dr. Shallow Impact Socket, 6-Point, 7/16"	122
IMTM16A	1/4" Dr. Shallow Impact Socket, 6-Point, 1/2"	122
IMTM18A	1/4" Dr. Shallow Impact Socket, 6-Point ,9/16"	122
IMTM8A	1/4" Dr. Shallow Impact Socket, 6-Point, 1/4"	122
IMTMM10	1/4" Dr. Metric Impact Socket, 6-Point, 10mm	122
IMTMM11	1/4" Dr. Metric Impact Socket, 6-Point, 11mm	122
IMTMM12	1/4" Dr. Metric Impact Socket, 6-Point, 12mm	122
IMTMM13	1/4" Dr. Metric Impact Socket, 6-Point, 13mm	122
IMTMM14	1/4" Dr. Metric Impact Socket, 6-Point, 14mm	122
IMTMM15	1/4" Dr. Metric Impact Socket, 6-Point, 15mm	122
IMTMM5	1/4" Dr. Metric Impact Socket, 6-Point, 5mm	122
IMTMM5.5	1/4" Dr. Metric Impact Socket, 6-Point, 5.5mm	122
IMTMM6	1/4" Dr. Metric Impact Socket, 6-Point, 6mm	122
IMTMM7	1/4" Dr. Metric Impact Socket, 6-Point, 7mm	122
IMTMM8	1/4" Dr. Metric Impact Socket, 6-Point, 8mm	122
IMTMM9	1/4" Dr. Metric Impact Socket, 6-Point, 9mm	338
LP6LN	Locking Long Nose Pliers, 6"	318
NDD1070A	Fractional Nut Driver Set, 6-Point (7 pcs)	244
OEX44B	Combination Wrench, 12-Point, 1 3/8"	244
OEX46B	Combination Wrench, 12-Point, 1 7/16"	244
OEX48B	Combination Wrench, 12-Point, 1 1/2"	464
PDR3000A	Air Drill, 3/8"	352
PPR708BK	Roll Pin Punch Set (8 pcs)	239
R810C	Frac. Ratcheting Box Wrench, 12-Point, 1/4"-5/16"	239
RB604C	Frac. Ratcheting Box Wrench Set, 12-Point (4 pcs)	257
RXS605B	Flare Nut/Open End Wrench Set, 6-Point (5 pcs)	363
SHDTX315O	T15 Torx® Screwdriver, Orange	311
SHDTX320O	T20 Torx Screwdriver, Orange	311
SPBS80	Prybar with Handle, 8", Orange	330
SSDMR8AO	Ratcheting Magnetic Screwdriver, Orange	315
SX15	1/2" Dr. Extension, 15"	189
TD9902B	Tap and Die Set (25 pcs)	377
TS381	1/2" Dr. Deep Socket, 6-Point 1 3/16"	192
TS401	1/2" Dr. Deep Socket, 6-Point 1 1/4"	192
TS421	1/2" Dr. Deep Socket, 6-Point 1 5/16"	192
TW381	1/2" Dr. Socket, 6-Point 1 3/16"	191
TW401	1/2" Dr. Socket, 6-Point 1 1/4"	191
TW421	1/2" Dr. Socket, 6-Point 1 5/16"	191
TW441	1/2" Dr. Socket, 6-Point 1 3/8"	191
TW461	1/2" Dr. Socket, 6-Point 1 7/16"	191
TW481	1/2" Dr. Socket, 6-Point 1 1/2"	191
TWM25	1/2" Dr. Metric Socket, 6-Point, 25mm	191
TWM26	1/2" Dr. Metric Socket, 6-Point, 26mm	191
TWM27	1/2" Dr. Metric Socket, 6-Point, 27mm	191
TWM30	1/2" Dr. Metric Socket, 6-Point, 30mm	191
TWM32	1/2" Dr. Metric Socket, 6-Point, 32mm	191
VE200A	Tool Control Board	392
VS26B	Open End Wrench, 13/16"	256
VS28B	Open End Wrench, 7/8"	256
VS30B	Open End Wrench, 15/16"	256
VS32B	Open End Wrench, 1"	256
XO605	Fractional Offset Box Wrench Set, 12-Point (5 pcs)	251

Metric Sets

Metric Set A

9100GMBO Complete Metric Set A.
- More than 150 pcs: includes 9100AGMO plus KRA4059FPBO top chest

9100AGMO Metric Basic Set A.
- Does not include tool storage

9100GMBO

Metric Set B

9200GMBO Complete Metric Set B.
- Includes: 9100AGMO, 9000GM2O plus KRA4059FPBO top chest and KRA4008FPBO roll cab

9200GMO Metric Set B.
- More than 400 pcs
- Does not include tool storage

9000GM2O Add-on Group B.
- More than 200 pcs
- Does not include tool storage

9200GMBO

U.S. and metric set cabinetry and components are subject to change and may not be exactly as illustrated. U.S. sets are shown on pages N014-N017. U.S. set listings are on pages N018 and N019. Metric listings are shown on pages N022 and N023.

Metric Set C

9300GMBO Complete Metric Set C.
- Includes 9200GMO, 9000GM3O plus KRL751PBO top chest and KRL756CPBO roll cab

9300GMO Metric Set C.
- More than 600 pcs: includes all tools in 9200GMO and 9000GM3O
- Does not include tool storage

9000GM3O Add-on Group C.
- More than 200 pcs in the add-on set to 9200GMO Set B
- Does not include tool storage

9300GMBO

Metric Set D

9400GMBO Complete Metric Set D.
- Includes: 9300GMO, 9000GM4O plus KRL751PBO top chest, KRL756CPBO roll cab and KRA276D wall cabinet

9400GMO Metric Set D.
- More than 800 pcs: includes all tools in 9300GMO and 9000GM4O
- Does not include tool storage

9000GM4O Add-on Group D.
- More than 175 pcs in the add-on set to 9300GMO Set C
- Does not include tool storage

9400GMBO

⚠ WARNING

- Do not open more than one loaded drawer at a time
- Keep children away
- Close lid, lock drawers and doors before moving
- Apply brakes on locking casters when not moving unit
- Do not step in or on drawers
- Secure units together with fasteners
- Do not pull; push to move
- Wear gloves when lifting by edges
- Keep feet and fingers clear of edges when stacking, hanging, or moving units
- Read additional safety precautions on pages W1 to W4

SET BUILDING

Metric Sets Contents

9100AGMO Metric Basic Set A

Stock No.	Description	Page
112STMMY	¼" Dr. Metric Deep Skt. Set, 6-Point (12 pcs)	19
117TMM	¼" Dr. Metric Starter Set (17 pcs)	81
2004BSKA	Battery Service Kit (4 pcs)	435
206EAU	⅜" Dr. Adaptor Set (6 pcs)	75
212EFTXY	⅜" and ¼" Dr. Torx® Driver Set (12 pcs)	52
212FSMY	⅜" Dr. Metric Socket Set, 6-Point (12 pcs)	25
212SFSMY	⅜" Dr. Metric Deep Socket Set, 6-Point (12 pcs)	26
317AMMPC	½" Dr. Metric Gen. Service Set, 6-Point (17 pcs)	88
91ACP	Adjustable Joint Pliers	153
97CCP	Needle Nose Pliers	153
1650	Prybar, 16" long	149
AC5B	Wire Brush	578
AWM110DHK	Metric Hex Wrench Set (11 pcs)	118
BP16B	Ball Peen Hammer, 16 oz.	175
CSA8C	Carbon Scraper	181
CT4G	Circuit Tester	409
ECF201A	3 watt LED Flashlight	496
F80	⅜" Dr. Sealed Ratchet	8
FADH12A	Adjustable Wrench, Cushion Handle, 12"	120
FB316B	Ignition/Spark Plug Gauge Set (18 blades)	531
FB360C	Feeler Gauge Set (6 blades)	532
FB361A	Gapper Gauge	532
FBM320	Metric Feeler Gauge Set (20 blades)	531
FLF80	⅜" Dr. Long Flex Head Sealed Ratchet	8
FXK11	⅜" 8" Dr. Extension, 11" long	67
GA295	Mirror	534
GSAF1E	Square Drive Adaptor	75
HBPT16	Plastic Tip Hammer, 16 oz.	174
HSG319	Hacksaw	176
LP10WR	Locking Pliers, 10" long	161
OEXM710B	Metric Combination Wrench Set, 12-Point (10 pcs)	97
PK53A	Scraper	182
PL300CF	Needle Nose/Diagonal Cutter/Pliers Set (3 pcs)	153
PPC710ABK	Punch and Chisel Set (11 pcs)	170
PRH57A	Retaining Ring Pliers, Convertible	156
PT5C	Telescopic Pick Up Tool	535
PWC6	Wire Stripper/Cutter Pliers	155
RXFMS606B	Metric Flare Nut Wrench Set, 6-Point (6 pcs)	110
S9704KR	⅜" Dr. Spark Plug Retention Socket, 6-Point, 13/16"	187
S9706KRA	⅜" Dr. Spark Plug Retention Socket, 6-Point, ⅝"	187
SGA173BR	Radiator Hose Tool	451
SGASA204AO	Miniature Awl/Pick Set, Orange	145
SGT4BR	Standard Shank Driver	74
SHDX80O	Combination Screwdriver Set, Orange	129
SSDMR4BO	Ratcheting Magnetic Screwdriver, Orange	137
TMXK60	¼" Dr. Extension, 6" long	65
TPMA25EM	Metric Tape Rule, 5M	533

9000GM2O Add-on Group

Stock No.	Description	Page
206FSUMA	⅜" Dr. Metric Shallow Universal Socket Set, 6-Point (6 pcs)	149
207EFAMY	⅜" Dr. Metric Hex Driver Set (7 pcs)	157
210FRHMA	⅜" Dr. Met. Flare Nut Wrench Set, 6-Point (10 pcs)	260
310IMMYA	½" Dr. Shallow Metric Impact Socket Set, 6-Point (10 pcs)	200
310SIMMYA	½" Dr. Deep Metric Impact Socket Set, 6-Point (10 pcs)	202
313TSMYA	½" Dr. Metric Deep Socket Set, 12-Point (13 pcs)	192
388CF	Hi Leverage Cutters, 7 ¾" long	335
61ACP	Duck Bill Pliers, 7 ¾" long	336
1250	Prybar, 12" long	337
AC58D	Wire Brush	738
AWP160	Adjustable Joint Tongue & Groove Pliers	337
BP24B	Ball Peen Hammer, 24 oz.	356
CJ2001P	Bolt Grip Puller Set	393
CSA12CO	Carbon Scraper	365
E1020	Extractor Set (20 pcs)	383
FADH8A	Adjustable Wrench, Cushion Handle, 8"	272
FL80	⅜" Dr. Long Handle Sealed Ratchet	138
FX24A	⅜" Dr. Extension, 24" long	143
FXK4	⅜" Dr. Extension, 4" long	143
FXK8	⅜" Dr. Extension, 8" long	143
GA3000B	Ear Protectors	729
HBFE32	Dead Blow Hammer, 32 oz.	5
IP80D	½" Dr. Impact Swivel Socket	199
JCK7D	Fender Cover	670
JT13A	Blow Gun	504
LP7WR	Locking Pliers, 7" long	338
MG725	Heavy Duty Air Impact Wrench, ½" Dr.	464
OEXM200B	Metric Combination Wrench, 12-Point, 20mm	243
OEXM210B	Metric Combination Wrench, 12-Point, 21mm	243
OEXM220B	Metric Combination Wrench, 12-Point, 22mm	243
OEXM6B	Metric Short Combination Wrench, 12-Point, 6mm	246
OEXM7B	Metric Short Combination Wrench, 12-Point, 7mm	246
OEXM8B	Metric Short Combination Wrench, 12-Point, 8mm	246
OEXM9B	Metric Short Combination Wrench, 12-Point, 9mm	246
OEXSM710B	Metric Short Combination Wrench Set 12-Point (10 pcs)	246
PPC104A	Pin Punch, ⅛"	351
PPC108A	Pin Punch, ¼"	351
PPC204A	Starter Punch, ⅛"	351
PPC208A	Starter Punch, ¼"	351
PPC3A	Center Punch, 5/16"	351
QD3RM30	½" Dr. Click Type Torque Wrench, 30 kg•m	280
S8	½" Dr. Universal Joint	109
SGCP1BR	Cotter Pin Puller	588
SGHBF500A	File Set with Handles (4 pcs)	363
SL80	½" Dr. Long Handle Sealed Ratchet	185
SN24C	½" Dr. Breaker Bar, 24" long	187
SPBS24O	Prybar with Handle, 24" long, Orange	330
SRPC105	Retaining Ring Pliers	339
SXK3	½" Dr. Extension, 3" long	189
TA3	¼" to ⅜" Dr. Adaptor	109
TC28C	Tube Cutter	13
TDM117A	Metric Tap and Die Set (41 pcs)	378
TF72	¼" Dr. Flex Head Sealed Ratchet	103
TFM428	Flaring Tool	14
TMX1	¼" Dr. Extension, 1" long	108
TMXK140	¼" Dr. Extension, 14" long	108
UTK100	Utility Knife	361

9000GM30 Add-on Group

Stock No.	Description	Page
106ATMXWP	1/4" Dr. Wobble Extension Set (6 pcs)	108
196CF	Needle Nose Pliers with Cutter, 7 1/8"	336
206AFXWP	3/8" Dr. Wobble Plus Extension Set (6 pcs)	144
214IMFMYA	3/8" Dr. Shallow Impact Socket Set, 6-Point (14 pcs)	163
214SIMFMYA	3/8" Dr. Metric Deep Impact Socket Set, 6-Point (14 pcs)	164
497CCP	90° Angle Needle Nose Pliers, 6 5/8"	336
650	Prybar, 6"	260
AWP120	Adjustable Joint Tongue and Groove Pliers, 12 3/4"	337
BP8B	Ball Peen Hammer, 8 oz.	356
CJ2002	Puller Set	392
F12LA	3/8" Dr. Breaker Bar	142
FADH10A	Adjustable Wrench, Cushion Handle, 10"	272
FAR7200	Super Duty Air Ratchet, 3/8" Dr.	464
FBF80	3/8" Dr. Bent Flex Head Sealed Ratchet	138
FK80	3/8" Dr. Short Handle Ratchet	138
HBBD32	Dead Blow Ball Peen Hammer, 32 oz.	5
HBBT24	Bronze Tip Hammer, 24 oz.	355
IMM200	1/2" Dr. Shallow Impact Socket, 6-Point, 20mm	200
IMM210	1/2" Dr. Shallow Impact Socket, 6-Point, 21mm	200
IMM220	1/2" Dr. Shallow Impact Socket, 6-Point, 22mm	200
IMM230	1/2" Dr. Shallow Impact Socket, 6-Point, 23mm	200
IMM240	1/2" Dr. Shallow Impact Socket, 6-Point, 24mm	200
IPF800B	3/8" Dr. Impact Universal Joint	162
IPFM10C	3/8" Dr. Metric Shallow Swivel Impact Socket, 10mm	165
IPFM12C	3/8" Dr. Metric Shallow Swivel Impact Socket, 12mm	165
IPFM13C	3/8" Dr. Metric Shallow Swivel Impact Socket, 13mm	165
IPFM14C	3/8" Dr. Metric Shallow Swivel Impact Socket, 14mm	165
IPFM15C	3/8" Dr. Metric Shallow Swivel Impact Socket, 15mm	165
IPFM16C	3/8" Dr. Metric Shallow Swivel Impact Socket, 16mm	165
IPFM17C	3/8" Dr. Metric Shallow Swivel Impact Socket, 17mm	165
IPFM18C	3/8" Dr. Metric Shallow Swivel Impact Socket, 18mm	165
IPFM19C	3/8" Dr. Metric Shallow Swivel Impact Socket, 19mm	165
IPFM9C	3/8" Dr. Metric Shallow Swivel Impact Socket, 9mm	165
JCW60R	Creeper	671
KB2178	Kit Bag	351
MG325	3/8" Dr. Air Impact Wrench	464
OEXM230B	Metric Combination Wrench, 12-Point, 23mm	243
OEXM240B	Metric Combination Wrench, 12-Point, 24mm	243
OEXM270B	Metric Combination Wrench, 12-Point, 27mm	243
OEXM300B	Metric Combination Wrench, 12-Point, 30mm	243
OEXM90B	Metric Combination Wrench, 12-Point, 9mm	243
OXIM710B	Metric Midget Comb. Wrench Set, 12-Point (10 pcs)	247
OXIM7B	Metric Midget Combination Wrench, 12-Point, 7mm	247
OXIM8B	Metric Midget Combination Wrench, 12-Point, 8mm	247
OXIM9B	Metric Midget Combination Wrench, 12-Point, 9mm	247
PPB1012A	Bronze Tapered Punch, 3/8"	352
PPC110A	Pin Punch, 5/16"	351
PPC112	Pin Punch, 3/8"	351
PPC210A	Starter Punch, 5/16"	351
PPC5A	Punch and Chisel Holder	351
PPC824B	Flat Chisel, 3/4"	351
PPC828B	Flat Chisel, 7/8"	351
PT28E	Pick Up Tool	682
PWC14	Wire Stripper/Cutter/Bolt Cutter	344
QD2RM1000	Metric Adj. Click Type Torque Wrench 3/8"	280
RTD48	Rethreading Kit	374
S9704KFUA	3/8" Dr. Spark Plug Universal Socket, 11/16"	173
S9706KRFUA	3/8" Dr. Spark Plug Universal Socket, 6-Point, 5/8"	372
SDM400A	Screwdriver Bit Set (37 pcs)	319
SF80	1/2" Dr. Sealed Flex Head Ratchet	185
SGD304BR	Flat Tip Electronics Sc. Dr., .018" x 1/8" x 3"	305
SHDP162O	Phillips® Tip Screwdriver #2, Orange	307
SHDP62IRO	Phillips® Screwdriver, #2, Orange	307
SHDP63IRO	Phillips® Tip Screwdriver #3, Orange	307
SIMM200	1/2" Dr. Deep Impact Socket, 6-Point, 20mm	202
SIMM210	1/2" Dr. Deep Impact Socket, 6-Point, 21mm	202
SIMM220	1/2" Dr. Deep Impact Socket, 6-Point, 22mm	202
SIMM230	1/2" Dr. Deep Impact Socket, 6-Point, 23mm	202
SIMM240	1/2" Dr. Deep Impact Socket, 6-Point, 24mm	202
SPBS120	Prybar with Handle, 12", Orange	330
SSDE42C	Flat Tip Electronics Sc. Dr., .018" x 1/8" x 2"	308
SSDE44C	Flat Tip Electronics Sc. Dr., .018" x 1/8" x 4"	308
SSDE46C	Flat Tip Electronics Sc. Dr., .018" x 1/8" x 6"	308
SSDE48C	Flat Tip Electronics Sc. Dr., .018" x 1/8" x 8"	308
SSDMR1AO	Ratcheting Magnetic Screwdriver, Orange	315
SX2	1/2" Dr. Extension, 2"	189
TC123C	Tube Cutter	368
TM61A	1/4" Dr. Flexible Extension, 6"	108
TMXK110	1/4" Dr. Extension, 11"	108
TWM25	1/2" Dr. Metric Socket, 6-Point, 25mm	191
TWM26	1/2" Dr. Metric Socket, 6-Point, 26mm	191
TWM27	1/2" Dr. Metric Socket, 6-Point, 27mm	191
TWM30	1/2" Dr. Metric Socket, 6-Point, 30mm	191
VSM807B	Metric Open End Wrench Set (7 pcs)	256
XBM605A	Metric Long Offset Box Wrench Set (5 pcs)	249
XOM605	Metric Deep Offset Box Wrench Set (5 pcs)	251

9000GM40 Add-on Group

Stock No.	Description	Page
106ETMAMY	1/4" Dr. Metric Hex Driver Set (6 pcs)	119
10SSD	Offset Flat Tip Screwdriver	311
111TMUSMA	1/4" Dr. Metric U-Socket Set (11 pcs)	113
120SSDP	Phillips® Offset Screwdriver, #1-#2	311
20SSD	Offset Flat Tip Screwdriver	311
307IPLMY	1/2" Dr. Impact Swivel Sockets, 6-Point (7 pcs)	204
2050	Prybar, 20"	332
AWP65	Adjustable Joint Tongue & Groove Pliers	337
BP12B	Ball Peen Hammer, 12 oz.	356
CHN480	Adjustable Joint Pliers, 20"	—
CJ2003A	Rear Axle Puller Set	392
CJ2004	Interchangeable Puller Set	392
CJ2005	Puller Accessory Set	392
CM6551	Miniature Screwdriver Set	311
DBTR129	Drill Bit Set 1/16"-1/4" (29 pcs)	450
E703BCG	Elec. Needle Nose Pliers, Serrated Jaws	341
E704BCG	Elec. Needle Nose Pliers, 60° Bent Tip, Non-Serrated	341
E710BCG	Taper Head Electronic Cutters, True Flush Cut	342
FADH6A	Adjustable Wrench, Cushion Handle, 6"	272
FAR25A	1/4" Dr. Air Ratchet	464
FSM61	3/8" Dr. Metric Socket, 6-Point, 6mm	146
FSM71	3/8" Dr. Metric Socket, 6-Point, 7mm	146
FSUM11A	3/8" Dr. Shallow Universal Socket, 6-Point, 11mm	149
FSUM16A	3/8" Dr. Shallow Universal Socket, 6-Point, 16mm	149
FSUM18A	3/8" Dr. Shallow Universal Socket, 6-Point, 18mm	149
FSUM19A	3/8" Dr. Shallow Universal Socket, 6-Point, 19mm	149
FX18	3/8" Dr. Extension, 18"	143
FX36	3/8" Dr. Extension, 36"	143
HBF100	Mixed File Set (6 pcs)	363
HBFE48	Dead Blow Hammer, 48 oz.	5
IMTMM10	1/4" Dr. Metric Impact Socket, 6-Point, 10mm	122
IMTMM11	1/4" Dr. Metric Impact Socket, 6-Point, 11mm	122
IMTMM12	1/4" Dr. Metric Impact Socket, 6-Point, 12mm	122
IMTMM13	1/4" Dr. Metric Impact Socket, 6-Point, 13mm	122
IMTMM14	1/4" Dr. Metric Impact Socket, 6-Point, 14mm	122
IMTMM15	1/4" Dr. Metric Impact Socket, 6-Point, 15mm	122
IMTMM5	1/4" Dr. Metric Impact Socket, 6-Point, 5mm	122
IMTMM5.5	1/4" Dr. Metric Impact Socket, 6-Point, 5.5mm	122
IMTMM6	1/4" Dr. Metric Impact Socket, 6-Point, 6mm	122
IMTMM7	1/4" Dr. Metric Impact Socket, 6-Point, 7mm	122
IMTMM8	1/4" Dr. Metric Impact Socket, 6-Point, 8mm	122
IMTMM9	1/4" Dr. Metric Impact Socket, 6-Point, 9mm	122
LP5WR	Locking Pliers, 5"	338
LP6LN	Long Nose Pliers, 6"	338
NDDM1070	Metric Nut Driver Set, 6-Point (7 pcs)	318
OEXM250B	Metric Combination Wrench, 12-Point, 25mm	243
OEXM260B	Metric Combination Wrench, 12-Point, 26mm	243
OEXM290B	Metric Combination Wrench, 12-Point, 29mm	243
OEXM320B	Metric Combination Wrench, 12-Point, 32mm	243
PDR3000A	3/8" Reversible Air Drill	464
PPR708BK	Roll Pin Punch Set (8 pcs)	352
RBM604C	Metric Ratcheting Box Wrench Set, 12-Point (4 pcs)	239
RXSM605B	Metric Flare Nut/Open End Wrench Set, 6-Point (5 pcs)	239
SFSM6	1/4" Dr. Metric Deep Socket, 6-Point, 6mm	239
SFSM7	1/4" Dr. Metric Deep Socket, 6-Point, 7mm	239
SHDTX315O	T15 Torx® Screwdriver, Orange	311
SHDTX320O	T20 Torx Screwdriver, Orange	311
SPBS8O	Prybar with Handle, Orange, 8"	330
SSDMR8AO	Ratcheting Magnetic Screwdriver, Orange	315
STMM4.5	1/4" Dr. Metric Deep Socket, 6-Point, 4.5mm	111
SX15	1/2" Dr. Extension, 15"	189
TDM99117B	Metric Tap and Die Set (25 pcs)	378
TMM4.5	1/4" Dr. Metric Socket, 6-Point, 4.5mm	110
TSM26	1/2" Dr. Metric Deep Socket, 6-Point, 26mm	192
TSM27	1/2" Dr. Metric Deep Socket, 6-Point, 27mm	192
TSM30	1/2" Dr. Metric Deep Socket, 6-Point, 30mm	192
TSM32	1/2" Dr. Metric Deep Socket, 6-Point, 32mm	192
TWM10A	1/2" Dr. Metric Socket, 6-Point, 10mm	191
TWM11A	1/2" Dr. Metric Socket, 6-Point, 11mm	191
TWM28	1/2" Dr. Metric Socket, 6-Point, 28mm	191
TWM29	1/2" Dr. Metric Socket, 6-Point, 29mm	191
TWM31	1/2" Dr. Metric Socket, 6-Point, 31mm	191
TWM32	1/2" Dr. Metric Socket, 6-Point, 32mm	191
VE200A	Puller Control Board	392

TOOL CONTROL SET BUILDING

U.S. Tool Control Sets

Please refer to page N025 for the full set listing

Intermediate Sets
(in blue over yellow tool control foam)

We offer many choices so you can find the system that best fits your exact needs.
Choose from a variety of ideas:

- Complete Tool Sets
- Tool Control Systems
- Tool Control Foam Inserts
- Portable Tool Control Systems
- High Visibility Tools
- Silhouetted Tool Boards
- Wall Cabinets
- Tool Cabinet Accessories

9200 Set in KRA4059 Tool Chest (US Set 2)

9600GSO Set in KRL791APBO Tool Chest and KRL722BPBO Roll Cab (U.S. Set 6)

Apprentice Set
Includes more than 100 pieces with complete Tool Control Foam System.

Stock No.	Description
KRA2055FPBO	Snap-on Top Chest
9100GSO	9100 - Tools Only
VF9100GSB-UY	9100 - Foam Only (Blue over Yellow)

Complete Set 2
Includes more than 200 pieces with complete Tool Control Foam System.

Stock No.	Description
KRA4059FPBO	Snap-on Top Chest
9200AGSO	9200 - Tools Only
VF9200GSB-UY	9200 - Foam Only (Blue over Yellow)

Complete Set 3
Includes more than 300 pieces with complete Tool Control Foam System.

Stock No.	Description
KRA4059FPBO	Snap-on Top Chest
KRA4008FPBO	Snap-on Roll Cab
9300GSOFPBO	9300 - Tools Only
VF9300GSB-UY	9300 - Foam Only (Blue over Yellow)

Complete Set 4
Includes more than 600 pieces with complete Tool Control Foam System.

Stock No.	Description
KRL751PBO	Snap-on Top Chest
KRL756CPBO	Snap-on Roll Cab
9400GSO	9400 - Tools Only
VF9400GSB-UY	9400 - Foam Only (Blue over Yellow)

Complete Set 5
Includes more than 800 pieces, with complete Tool Control Foam System.

Stock No.	Description
KRL751PBO	Snap-on Top Chest
KRL756CPBO	Snap-on Roll Cab
9500GSO	9500 - Tools Only
VF9500GSB-UY	9500 - Foam Only (Blue over Yellow)

Complete Set 6
Includes more than 1000 pieces with complete Tool Control Foam System.

Stock No.	Description
KRL791APBO	Snap-on Top Chest
KRL722BPBO	Snap-on Roll Cab
9600GSO	9600 - Tools Only
VF9600GSB-UY	9600 - Foam Only (Blue over Yellow)

Shown:
- Blue Over Yellow (-UY)

Other Foam Colors Available:
- Yellow Over Red (-YR)
- Black Over Red (-BR)
- Black Over Yellow (-BY)

U.S. Tool Control Set Building: Complete Tool Set
Configuration sets are available with tool storage and tool control foam
See below for ordering information for each configuration

9100 SERIES	9100GSO	9100GSBO	9100GSBFMBRO	9100GSBFMBYO	9100GSBFMUYO	
Description	U.S. Apprentice set tools only	U.S. Apprentice set tools and tool storage	U.S. Apprentice set including tool storage with black over red tool control foam	U.S. Apprentice set including tool storage with black over yellow tool control foam	U.S. Apprentice set including tool storage with blue over yellow tool control foam	
CONTENTS Refer to pages N014-N024 for descriptions and listings for all tool sets		KRA2055FPBO	VF9100GSB-BR	VF9100GSB-BY	VF9100GSB-UY	
			KRA2055FPBO	KRA2055FPBO	KRA2055FPBO	
9200 SERIES	**9200GSO**	**9200GSBO**	**9200GSBFMBR**	**9200GSBFMBY**	**9200GSBFMUY**	**9200GSBFMYR**
Description	U.S. Set 2 tools only	U.S. Set 2 including tools and tool storage	U.S. Set 2 including tool storage with black over red tool control foam	U.S. Set 2 including tool storage with black over yellow tool control foam	U.S. Set 2 including tool storage with blue over yellow tool control foam	U.S. Set 2 including tool storage with yellow over red tool control foam
CONTENTS Refer to pages N014-N024 for descriptions and listings for all tool sets		KRA4059FPBO	VF9200GSB-BR	VF9200GSB-BY	VF9200GSB-UY	VF9200GSB-YR
			KRA4059FPBO	KRA4059FPBO	KRA4059FPBO	KRA4059FPBO
9300 SERIES	**9300GSO**	**9300GSBO**	**9300GSBFMBRO**	**9300GSBFMBYO**	**9300GSBFMUYO**	**9300GSBFMYRO**
Description	U.S. Set 3 tools only	U.S. Set 3 including tools and tool storage	U.S. Set 3 including tool storage with black over red tool control foam	U.S. Set 3 including tool storage with black over yellow tool control foam	U.S. Set 3 including tool storage with blue over yellow tool control foam	U.S. Set 3 including tool storage with yellow over red tool control foam
CONTENTS Refer to pages N014-N024 for descriptions and listings for all tool sets		KRA4008FPBO	VF9300GSB-BR	VF9300GSB-BY	VF9300GSB-UY	VF9300GSB-YR
		KRA4059FPBO	KRA4008FPBO	KRA4008FPBO	KRA4008FPBO	KRA4008FPBO
			KRA4059FPBO	KRA4059FPBO	KRA4059FPBO	KRA4059FPBO
9400 SERIES	**9400GSO**	**9400GSBO**	**9400GSBFMBRO**	**9400GSBFMBYO**	**9400GSBFMUYO**	**9400GSBFMYRO**
Description	U.S. Set 4 tools only	U.S. Set 4 including tools and tool storage	U.S. Set 4 including tool storage with black over red tool control foam	U.S. Set 4 including tool storage with black over yellow tool control foam	U.S. Set 4 including tool storage with blue over yellow tool control foam	U.S. Set 4 including tool storage with yellow over red tool control foam
CONTENTS Refer to pages N014-N024 for descriptions and listings for all tool sets		KRL751PBO	VF9400GSB-BR	VF9400GSB-BY	VF9400GSB-UY	VF9400GSB-YR
		KRL756CPBO	KRL751PBO	KRL751PBO	KRL751PBO	KRL751PBO
			KRL756CPBO	KRL756CPBO	KRL756CPBO	KRL756CPBO
9500 SERIES	**9500GSO**	**9500GSBO**	**9500GSBFMBRO**	**9500GSBFMBYO**	**9500GSBFMUYO**	**9500GSBFMYRO**
Description	U.S. Set 5 tools only	U.S. Set 5 including tools and tool storage	U.S. Set 5 including tool storage with black over red tool control foam	U.S. Set 5 including tool storage with black over yellow tool control foam	U.S. Set 5 including tool storage with blue over yellow tool control foam	U.S. Set 5 including tool storage with yellow over red tool control foam
CONTENTS Refer to pages N014-N024 for descriptions and listings for all tool sets		KRL751PBO	VF9500GSB-BR	VF9500GSB-BY	VF9500GSB-UY	VF9500GSB-YR
		KRL756CPBO	KRL751PBO	KRL751PBO	KRL751PBO	KRL751PBO
			KRL756CPBO	KRL756CPBO	KRL756CPBO	KRL756CPBO
9600 SERIES	**9600GSO**	**9600GSBO**	**9600GSBFMBRO**	**9600GSBFMBYO**	**9600GSBFMUYO**	**9600GSBFMYRO**
Description	U.S. Set 6 tools only	U.S. Set 6 including tools and tool storage	U.S. Set 6 including tool storage with black over red tool control foam	U.S. Set 6 including tool storage with black over yellow tool control foam	U.S. Set 6 including tool storage with blue over yellow tool control foam	U.S. Set 6 including tool storage with yellow over red tool control foam
CONTENTS Refer to pages N014-N024 for descriptions and listings for all tool sets		KRL722BPBO	VF9600GSB-BR	VF9600GSB-BY	VF9600GSB-UY	VF9600GSB-UY
		KRL791APBO	KRL722BPBO	KRL722BPBO	KRL722BPBO	KRL722BPBO
			KRL791APBO	KRL791APBO	KRL791APBO	KRL791APBO

Complete Tool Sets

(Please refer to pages N014-N024 for the complete tool listings and add-on options)
See Tool Storage section for available color options.
Sets Subject to Change.

⚠ WARNING

- Storage units can tip or strike you
- Do not open more than one loaded drawer at a time
- Keep children away
- Apply brakes on locking casters when not moving unit
- Do not step in or on drawers
- Secure units together with fasteners
- Read safety precautions on pages W1 to W4

THERE ARE THOUSANDS OF REASONS TO CHOOSE SNAP-ON TOOL KITS.

From one-of-a-kind kits to thousands of identical tools sets, no one does tool kitting like Snap-on. No matter how big or small the application, Snap-on's robust, flexible and scalable capabilities enable us to create a plethora of kitting solutions – from stationary, mobile and transportable sets, to fully-outfitted shipping containers, and much more. No job is too big or too small, as we supply kits for everything from servicing copy machines, to maintaining and repairing tanks, helicopters, oil rigs and jumbo jets. Standard or custom, large or small – from our state-of-the-art kitting center, Snap-on does it all.

LOOKING FOR TOOL KITTING?

Contact your Account Manager or call 1.877.740.1900.

OUR FIVE-STAR APPROACH TO TOOL KITTING.

ORGANIZATION

Tons of options for organizing tools: bags, shadow boards, foam inserts for portable cases, custom foam layouts for tool box drawers, and more. When you're highly organized, you're highly productive.

TOOL MANAGEMENT

Management follows organization. Whether you require simple visual management, or a program to meet FOD and FME requirements, we can tailor a management program for virtually any need.

SOURCING AND INTEGRATION

Need a tool that requires additional sourcing beyond our standard offerings? No problem. We can do the sourcing for you, and integrate the components into your kit.

TOOL IDENTIFICATION

At Snap-on, we have in-house laser tool engraving capabilities to match your identification system – whether you're looking for etching for a specific kit, or serially marked tools.

ON-SITE TOOL MANAGEMENT

Sometimes you need someone to actually go on-site, check inventories, manage updates, and handle replacements. Snap-on is ready to assist you with all your tool needs.

LEVEL 5 Tool Control System™

NOW YOU CAN CLEARLY SEE WHERE YOUR TOOLS ARE

The Snap-on Visual Control Cabinet features a clear, abrasion-resistant polycarbonate window that gives you a full view of your tools for instant accountability and inventory management. Available in 2 sizes, this cabinet can hold up to 100 tools securely with keyed or keyless entry. With an optional rolling cart or rolling cab, you can position the Visual Control Cabinet close to the work so your technicians always have the right tools ready to use.

Shown with optional foam insert and rolling cart

FEATURES AND BENEFITS

PERFORMANCE

- Visually manage tools at the “Point of Use”
- Available in 34" and 49" sizes for a tool capacity of 70 to 100 tools
- VCC keeps tools chest high – within the “strike zone” – reducing the need to bend and stretch for tools
- Full swing door hinge creates unobstructed entry while gas shocks keep the window in the upright position

SECURITY

- Makrolon® AR Polycarbonate window – the same material used in jet fighter cockpits – for “at a glance” tool management and tool security
- Available with standard key locks or eLock keyless entry for maximum security without the need to distribute keys
- e-Lock is programmable for up to 3,000 users and can be networked with LockView® software

VERSATILITY

- Includes v-stand brackets with three versatile mounting options:
  1. Mount to a wall using the predrilled, 16" on center holes
  2. Mount to an optional 49" rolling cart using the predrilled holes and included hardware
  3. Mount to any 24" deep or larger roll cab using the predrilled holes and included hardware
- Interior tool control options include metal peg board or customized foam layouts
- Available in 5 color selections and Stainless Steel so you can organize by area, application or types of tools
- The paint-free stainless steel models are designed for clean room applications and feature an easy-to-clean surface

LEVEL 5 Tool Control System™

Colors Available

Red	Gloss Black	Royal Blue	Ultra Yellow	Arctic Silver
PBO	PC	PCM	PES	PKS

LEVEL 5 Tool Control System™

STANDARD VCC MODELS

Stock No.	Description
49-Inch Models (~100 Tools)	
L5V5S49PBO	49" Keyed 5S Box w/V-stand Red
L5V5S49PC	49" Keyed 5S Box w/V-stand Black
L5V5S49PCM	49" Keyed 5S Box w/V-stand Blue
L5V5S49PKS	49" Keyed 5S Box w/V-stand Arctic Silver
L5V5S49PES	49" Keyed 5S Box w/V-stand Yellow
L5VP5S49PBO	49" Keyless 5S Box w/V-stand Red
L5VP5S49PC	49" Keyless 5S Box w/V-stand Black
L5VP5S49PCM	49" Keyless 5S Box w/V-stand Blue
L5VP5S49PKS	49" Keyless 5S Box w/V-stand Arctic Silver
L5VP5S49PES	49" Keyless 5S Box w/V-stand Yellow
34-Inch Models (~70 Tools)	
L5V5S34PBO	34" Keyed 5S Box w/V-stand Red
L5V5S34PC	34" Keyed 5S Box w/V-stand Black
L5V5S34PCM	34" Keyed 5S Box w/V-stand Blue
L5V5S34PKS	34" Keyed 5S Box w/V-stand Arctic Silver
L5V5S34PES	34" Keyed 5S Box w/V-stand Yellow
L5VP5S34PBO	34" Keyless 5S Box w/V-stand Red
L5VP5S34PC	34" Keyless 5S Box w/V-stand Black
L5VP5S34PCM	34" Keyless 5S Box w/V-stand Blue
L5VP5S34PKS	34" Keyless 5S Box w/V-stand Arctic Silver
L5VP5S34PES	34" Keyless 5S Box w/V-stand Yellow

DIMENSIONS (inches)

49-Inch Models (~100 Tools)	
External Dimensions (H x L x D)	26.5 x 49.5 x 27
Storage Dimensions (D x L x W)	5.5 x 46.5 x 28.5
34-Inch Models (~70 Tools)	
External Dimensions (H x L x D)	26.5 x 34.5 x 27
Storage Dimensions (D x L x W)	5.5 x 31.5 x 28.5

STAINLESS STEEL VCC MODELS

Stock No.	Description
34-Inch Models (~70 Tools)	
L5V34SS	34" Keyed 5S Box w/Cart, Stainless
L5VP34SS	34" Keyless 5S Box w/Cart, Stainless
L5V5S34SS	34" Keyed 5S Box w/V-Stands, Stainless
L5VP5S34SS	34" Keyless 5S Box w/V-Stands, Stainless
49-Inch Models (~100 Tools)	
L5V49SS	49" Keyed 5S Box w/Cart, Stainless
L5VP49SS	49" Keyless 5S Box w/Cart, Stainless
L5V5S49SS	49" Keyed 5S Box w/V-Stands, Stainless
L5VP5S49SS	49" Keyless 5S Box w/V-Stands, Stainless

OPTIONAL ACCESSORIES

Stock No.	Description
Custom Foam Kits	
FOMV5S49UY	49" Foam Kit Royal Blue over Yellow
FOMV5S49BR	49" Foam Kit Black over Red
FOMV5S49BY	49" Foam Kit Black over Yellow
FOMV5S34UY	34" Foam Kit Royal Blue over Yellow
FOMV5S34BR	34" Foam Kit Black over Red
FOMV5S34BY	34" Foam Kit Black over Yellow
Peg Board Kits	
L5V5SPB49	49" Peg Board Kit
L5V5SPB34	34" Peg Board Kit
Rolling Carts	
L5V5SCRTPBO	VTC 5S Cart Red
L5V5SCRTPC	VTC 5S Cart Black
L5V5SCRTPCM	VTC 5S Cart Blue
L5V5SCRTPKS	VTC 5S Cart Arctic Silver
L5V5SCRTPES	VTC 5S Cart Yellow
LockView®	
L5LVSG3	LockView® Software

HOW TO ORDER

1. Select the desired box with v-stand in either 49" or 34", keyed or keyless, and a color option from VCC models.
2. Select interior tool control option, foam cut outs or metal peg board, from optional accessories
3. Select an optional rolling cart from optional accessories*
4. Add LockView® software for networking keyless boxes (one copy per administrator, not per box)

*KRSC100A cart or KRA2400 series roll cab are also viable options. Reference the Snap-on Industrial website or catalog.

Snap this code with your smartphone to watch the video!

To order product, contact your Snap-on Industrial Account Manager or call the Snap-on Industrial Customer Service Center 1-877-740-1900.
To view our Industrial website go to www1.snapon.com/industrial

⚠ WARNING

- Do not use chrome or industrial finish tools with impact drivers
- Keep hands away from pinch points when operating a pneumatic torque wrench
- Read safety precautions on pages W1 to W4

FOAM TOOL CONTROL KITS

LEVEL 2

TCK1827BR

TCK1827UY

Complete Pre-cut Tool Control Foam Kits KRL Series

Storage Model	Royal Blue Over Yellow	Black Over Red
KRL1033	L5A1033RBY	L5A1033BRD
KRL1023A	L5A1023ARBY	L5A1023ABRD
KRL7023A	L5A7023ARBY	L5A7023ABRD
KRL1032A	L5A1032ARBY	L5A1032ABRD
KRL1022A	L5A1022ARBY	L5A1022ABRD
KRL7022A	L5A7022ARBY	LYA7022ABRD
KRL722A	L5A722ARBY	L5A722ABRD
KRL1056B	L5A1056ARBY	L5A1056ABRD
KRL756B	L5A756BRBY	L5A756BBRD

Complete Pre-cut Tool Control Foam Kits KRA Series

Storage Model	Royal Blue Over Yellow	Black Over Red
KRA5319D	L5A5319DRBY	L5A5319DBRD
KRA5213D	L5A5213DRBY	L5A5213DBRD
KRA4813D	L5A4813DRBY	L5A4813DBRD
KRA4107D	L5A4107DRBY	L5A4107DBRD
KRA4008E	L5A4008ERBY	L5A48008EBRD
KRA2418	L5A2418RBY	L5A2418BRD
KRA2432	L5A2432RBY	L5A2432BRD
KRA2407	L5A2407RBY	L5A2407BRD
KRA2411	L5A2411RBY	L5A2411BRD
KRA2306	L5A2306RBY	L5A2306BRD
KRA2007	L5A2007RBY	L5A2007BRD
KRA2005	L5A2005RBY	L5A2005BRD

Pre-cut Tool Control Foam for Individual Drawers KRL Series

Royal Blue Over Yellow	Black Over Red	Drawer Size
L5A6726RBY	L5A6726BRD	67 1/8" X 26 31/32"
L5A4926RBY	L5A4926BRD	49 1/8" X 26 31/32"
L5A3026RBY	L5A3026BRD	30 1/2" X 26 31/32"
L5A1426RBY	L5A1426BRD	14 5/8" X 26 31/32"
L5A3021RBY	L5A3021BRD	30 31/32" X 21 29/32"

1/2" Tool Control Foam Over 1/8" Base

Pre-cut Tool Control Foam for Individual Drawers KRA Series

Royal Blue Over Yellow	Black Over Red	Drawer Size
L5A1117RBY	L5A1117BRD	11 7/32" X 17 1/2"
L5A2117RBY	L5A2117BRD	21 13/32" X 17 1/2"
L5A3417RBY	L5A3417BRD	34 23/32" X 17 1/2"
L5A4921RBY	L5A4921BRD	49 1/8" X 21 29/32"
L5A1421RBY	L5A1421BRD	14 19/32" X 21 29/32"
L5A3021RBY	L5A3021BRD	30 17/32" X 21 29/32"

1/2" Tool Control Foam Over 1/8" Base

Custom Foam Kits

Each foam kit includes: Six sheets of top and base foam material, one cutting tool, one 24 oz. can spray glue, one roll of tracing paper — to custom design and organize your tool drawers.

Royal Blue Over Yellow	Black Over Red	Size
TCK1827BUY	TCK1827BBR	18" X 27"
TCK4020BUY	TCK4020BBR	40" X 20"
TCK3627BUY	TCK3627BBR	36" X 27"

MAXIMUM SECURITY WITH CONTROLLED ACCESS

Features And Benefits

"At-a-Glance" Storage

- With a durable chrome finish and open cage design, it's easy to take inventory of your valubles from any vantage point—without ever entering the cage.

Controlled Security

- The cage features a keyless entry system and a secondary door handle that latches at top and bottom so you can control access to the cage. A convenient padlock security loop allows for easy audit control.

Keyless Entry System

- The Snap-on Keyless Entry System allows for entry with badge or via keypad with at-the-box programming for up to 3,000 users. The system can be networked with LockView® software.

Easy Access

- Double doors open to a full 270 degrees for easy access and an unubstructed view of the entire interior.

Storage Versitility

- The roomy interior features three shelves to securely store portable tools, assembly parts or project components.

Portable or Stationary

- Model L5BSCGP2460 features heavy-duty casters that swivel and lock for easy mobility, while model L5BSCGP2460S is designed to stay put.

Specifications

Stock No.	L5BSCGP2460 with Casters	L5BSCGP2460S Stationary
Country of Origin	USA	USA
Description	Stationary Bulk Storage Case with Casters and Keyless Entry System	Stationary Bulk Storage Case with Keyless Entry System
Keyless Entry System	Yes	Yes
Type of Entry	Badge or Keypad	Badge or Keypad
At-the-Box Programming	Yes	Yes
Number of Users	Up to 3,000	Up to 3,000
Networkable	With LockView® Software	With LockView® Software
Last Access Identification	Yes	Yes
Double-Door Opening	Yes, 270 Degrees	Yes, 270 Degrees
Padlock Door Latch	Yes	Yes
Total Load Capacity	900 lbs.	1,800 lbs.
Swivel and Locking Casters	Yes	-
Durable Chrome Finish	Yes	Yes
Outside Dimensions (W x H x D)	62"x 68"x 28.5"	62"x 67"x 28.5"
Inside Dimensions (W x H x D)	60"x 56"x 24"	60"x 56"x 24"
Warranty	2-Year	2-Year

Also Available:

L5BSPROXKIT - Snap-on Keyless Entry System to Retrofit most Wire Gage Designs

L5BSCG2460 - Snap-on Rolling Cage without Keyless Entry

L5BSCG2460S - Snap-on Stationary Cage without Keyless Entry

L5LVSG3 - Lockview Software

LEVEL 5™ Tool Control System

Snap-on's system secures your tool box, allowing you to control who has access to its contents. No keys to lose or share - your choice of access method:

Keypad PIN entry - Proximity ID card

Administrative access at the unit or through remote software lets you add and delete up to 3,000 authorized users, display an audit trail of past access, and more!

Level 5™ LockView® Features

- Eliminate the hassle of keys to open tool boxes
- Battery power makes ideal for environments where tool boxes are on the move
- Powered by 6 D-cell batteries (not included) or power cord
  - Single set of batteries can last up to six months depending upon environment
- Grants access to tool boxes with two access methods, Proximity ID card and/or keypad PIN entry
- Access with single credential or dual credential: card plus PIN for example
- Access unit sits on top of the box and comes pre-assembled –all you need to do is put in the batteries and set up access credentials
- LED lights indicate if box is opened or closed
- At the box programming
- Last access indicator

Accessories:

L5LVSG3 – Administrative Software

- Allows boxes to be connected to a laptop via USB cable
- See historical logs for box access
- Manage box settings
- Manage box user settings and access rights
- Manage groups of users
- Prevent "jackpot" access by locking out boxes after a number of access attempts

L5KTCPS – Replacement AC Power Supply

Retrofit Kits:

Existing boxes may be retrofitted modules. Each kit contains detailed instructions and box modification templates.

L5KTCPRKP – Standard HID proximity card and keypad access

LEVEL 5 Tool Control System™ Selection Guide

How to Order

Level 5™ is offered in 14 base unit configurations built on Snap-on KRA Roll Cab platforms.
For complete specifications, please see the full-line Snap-on Industrial Catalog.

Step 1 Determine the base unit requirement based on footprint, capacity and color from the chart.
Step 2 Choose your Level 5™ access method, either Keypad access, HID Proximity Card and Keypad access
Step 3 Order 1 copy of Level 5™ software per administrator (usually 1 copy per site).

Classic Series KTC Boxes	Number of Drawers	Cab Color	HID Proximity Card and Keypad Access
73" Triple Bank	18	Red	L5KP2418PBO
		Black	L5KP2418PC
		Blue	L5KP2418PCM
73" Double Bank	12	Red	L5KP2432PBO
		Black	L5KP2432PC
		Blue	L5KP2432PCM
55" Double Bank	10	Red	L5KP2422PBO
		Black	L5KP2422PC
		Blue	L5KP2422PCM
36" Single Bank	7	Red	L5KP2407PBO
		Black	L5KP2407PC
		Blue	L5KP2407PCM

Heritage Series KTC Boxes	Number of Drawers	Cab Color	HID Proximity Card and Keypad Access
53" Triple Bank	18	Red	L5KP2318PBO
		Black	L5KP2318PC
		Blue	L5KP2318PCM
53" Double Bank	12	Red	L5KP2312PBO
		Black	L5KP2312PC
		Blue	L5KP2312PCM
53" Double Bank	11	Red	L5KP5311PBO
		Black	L5KP5311PC
		Blue	L5KP5311PCM
40" Double Bank	13	Red	L5KP4813PBO
		Black	L5KP4813PC
		Blue	L5KP4813PCM
40" Double Bank	12	Red	L5KP2212PBO
		Black	L5KP2212PC
		Blue	L5KP2212PCM
40" Single Bank	7	Red	L5KP4107PBO
		Black	L5KP4107PC
		Blue	L5KP4107PCM
40" Single Bank	6	Red	L5KP2106PBO
		Black	L5KP2106PC
		Blue	L5KP2106PCM
26" Single Bank	8	Red	L5KP4008PBO
		Black	L5KP4008PC
		Blue	L5KP4008PCM
26" Single Bank	7	Red	L5KP2007PBO
		Black	L5KP2007PC
		Blue	L5KP2007PCM
26" Single Bank	5	Red	L5KP2005PBO
		Black	L5KP2005PC
		Blue	L5KP2005PCM

To order contact your Industrial Account Manager or call the Snap-on Industrial Customer Service Center 1-877-740-1900

LEVEL 5™
Tool Control System

Keyless Entry Features

- Access by time, user and date
- How long the user was in the box
- Records unauthorized access attempts by date, time and user
- It records the date, time, and user who performed a physical or visual inventory with findings
- Network-ready with your choice of Ethernet or wireless
- Works with your existing badge system or HID
- Connects to other boxes with slave units to create customized workstations
- Intuitive wizard - driven software provides centralized control for all boxes

Additional Keyless Entry features:

Power
- 12 V rechargeable battery for extended portability
- Battery level (fuel) gauge in LCD screen
- Messages alert users to recharge
- Indicates charging mode: plugged in, fast-charge or standby mode

Multi-Function Buttons
- Allow programming at the box
- View all settings, make changes
- View audit trails
- Record visual or physical inventories
- Add and delete users easily

Networking
- Networking allows easy system management from a central location LCD Screen
- Show date, time, user name, battery and system status

Additional Features
- Programmable auto-relock time
- Auto-relock on box movement for safety
- Drawer ajar alarm
- Programmable alarm system
- System upgradeable to 802.11N
- Supports up to 3,000 active users per box
- At the box programming
- Last access indicator

Technical Support
- Technical Support is provided through your Industrial Account Manager

Level 5™ is offered in eight base unit configurations built on Snap-on KRL Roll Cab platforms. Complete specifications and options are detailed in the following pages.

LEVEL 5 Tool Control System™

Selection Guide

How to Order

Level 5™ is offered in eight base unit configurations built on Snap-on KRL Roll Cab platforms. For complete specifications, please see the full-line Snap-on Industrial Catalog.

Step 1 Determine the base unit requirement based on footprint, capacity and color from the chart.
Step 2 Choose your Level 5™ access method, either HID Standard or I Class proximity badge reader
Step 3 Choose your networking connections, either Ethernet or wireless.
Step 4 Order 1 copy of Level 5™ software per administrator (usually 1 copy per site).
Step 5 Choose the accessories that you need for your installation.If you plan to add and connect tool chests, drawer sections and side cabinets to create networked workstations, contact your Snap-on Industrial Account Manager or Customer Service Center for information on slave modules and latches.

1 - Base Unit / 2 - Access Method

Platform	Footprint	Drawer Banks	No. Drawers	Color	Standard HID Prox Access	I Class HID Access
KRL756	35-58"X 24"	1	7	Red	L5P756APBO	L5I756APBO
				Blue	L5P756APCM	L5I756APCM
				Black	L5P756APC	L5I756APC
				Yellow	L5P756APES	L5I756APES
				Arctic Silver	L5P756APKS	L5I756APKS
KRL1056	35-58"X 29"	1	8	Red	L5P1056APBO	L5I1056APBO
				Blue	L5P1056APCM	L5I1056APCM
				Black	L5P1056APC	L5I1056APC
				Yellow	L5P1056APES	L5I1056APES
				Arctic Silver	L5P1056APKS	L5I1056APKS
KRL722	54-¼" X 24"	2	11	Red	L5P722APBO	L5I722APBO
				Blue	L5P722APCM	L5I722APCM
				Black	L5P722APC	L5I722APC
				Yellow	L5P722APES	L5I722APES
				Arctic Silver	L5P722APKS	L5I722APKS
KRL1022	54-¼" X 29"	2	13	Red	L5P1022APBO	L5I1022BPBO
				Blue	L5P1022APCM	L5I1022BPCM
				Black	L5P1022APC	L5I1022BPC
				Yellow	L5P1022APES	L5I1022BPES
				Arctic Silver	L5P1022APKS	L5I1022BPKS
KRL1032	54-¼" X 29"	2	16	Red	L5P1032APBO	L5I1032BPBO
				Blue	L5P1032APCM	L5I1032BPCM
				Black	L5P1032APC	L5I1032BPC
				Yellow	L5P1032APES	L5I1032BPES
				Arctic Silver	L5P1032APKS	L5I1032BPKS
KRL7022	54-¼" X 29"	2	11	Red	L5P7022APBO	L5I7022BPBO
				Blue	L5P7022APCM	L5I7022BPCM
				Black	L5P7022APC	L5I7022BPC
				Yellow	L5P7022APES	L5I7022BPES
				Arctic Silver	L5P7022APKS	L5I7022BPKS
KRL1023	72-⅞" X 29"	3	22	Red	L5P1023APBO	L5I1023BPBO
				Blue	L5P1023APCM	L5I1023BPCM
				Black	L5P1023APC	L5I1023BPC
				Yellow	L5P1023APES	L5I1023BPES
				Arctic Silver	L5P1023APKS	L5I1023BPKS
KRL7023	72-⅞" X 29"	3	19	Red	L5P7023APBO	L5I7023BPBO
				Blue	L5P7023APCM	L5I7023BPCM
				Black	L5P7023APC	L5I7023BPC
				Yellow	L5P7023APES	L5I7023BPES
				Arctic Silver	L5P7023APKS	L5I7023BPKS

3 - Network Connection

Wireless 802.11 Module	Wifi module with cable one required per box	L580211G
Ethernet Module, Cable	Module with cable one required per box	L5ETHERG3

4 Software

NTC Software	One copy per administrator not one per box	L5LVSG3

5 - Accessories

Slave Unit Control	One required per top box or side cabinet	L5SUG3
HID Access Panel	Module with cable one required per box	L5PROXG3
HID I Class Access Panel		L5ICLG3
Battery Box & Batteries	Battery box with batteries and cable	L5BPG3
Power Supply	Replacement power supply with cable	L5PSG3
Power Connector (back)		L5YPSG3
HID Retrofit Kit	Complete kit to retrofit a KRL bottom box with HID reader	L5PROXKITG3
Auxiliary Latch Module		L5SUAUXG3
1-Point Side Locker Lock Kit		L5L1PG3
3-Point Side Locker Lock Kit		L5L3PG3

To order contact your Industrial Account Manager or call the Snap-on Industrial Customer Service Center 1-877-740-1900

LEVEL 5™ TCMAX®

L5W3174269

L5W2672073

L5W2568546

L5W2136156

Label & Receipt Printers

- **L5W2672073** Prints on tamper proof label material that is very difficult to pick off anything. With other labels, once the label starts to peel off, the rest of the label soon follows. This label will only chip and will not peel off. Label costs are rather low, 4 cents per label, and the ⅜" x 1½" label is utilized by pocket badges.
- **L5W2312524** ⅜" Label Tape Roll
  L5W2312526 ½" Label Tape Roll
- **L5W3174269** Thermal receipt printer with USB interface, 208 dpi. Barcodes on the receipts expedite the turn-in process at a busy tool crib and can be used on the job to show what tools you should have at this time.
- **L5W1523258** Receipt Paper 1 roll for L5W3174269.
- **L5W2177226** - Case 50 rolls.

Barcode Scanners

- **L5W2568546** is a wireless barcode scanner, with a keypad on the top and is our most popular scanner. It does NOT do 2-D PDF417 or DataMatrix barcodes, but it is great for all 1-D applications. Keypad on the top allows you to easily enter quantities of items without having to return to the computer keyboard.
- **L5W3021135** has a six foot USB cable that plugs into the PC or laptop. Works best when all items to be scanned are within 5 feet of the PC.
- **L5W2136156** is a wireless 2-D scanner that can read all linear barcodes plus 2-D barcodes like PDF417 and DataMatrix, but NOT on laser engraved chrome plated tools. Great for 2-D labels but does not have a keypad.

Item may differ from picture **L5W1128080**

Signature Pad

- **L5W1128080** Required to support electronic capture of signature, provide proof of delivery and return by a specified individual.

Level 5 Box Adaptor

- **L5W1769502** RS232 adaptor box, cable and USB to RS232 adaptor to connect Level 5 Tool Box to a PC and TCMax for Level 5™ Gen 3 boxes only.

SS2763

Level 5™ TCMax® is Tool Control Software that talks™, eliminating the need to repeatedly look at the computer screen between barcode scans. It is the fastest, most accurate way to check tools in and out. TCMax can communicate with the Snap-on® Keyless Entry System for the ultimate in positive tool contol. Provides audible and visual verification of items and function. It's easy to use, smart and secure.

Stock No.	Description
SS2763B	TCMax Demo Disc
L5CAP1	TCMax 1 seat maintenance agreement and updates for one year
L5CAP3	TCMax 3 seats maintenance agreement and updates for one year
L5CAP5	TCMax 5 seats maintenance agreement and updates for one year
L5CSL1P	TCMax 1 Seat License
L5CSL3P	TCMax 3 Seat License
L5CSL5P	TCMax 5 Seat License
L5CPP1	TCMax 1 Seat Mobile Pocket PC License
L5CPP3	TCMax 3 Seat Mobile Pocket PC License
L5CPP5	TCMax 5 Seat Mobile Pocket PC License

Contact your Snap-on Industrial Representative for more information, or call our Customer Service Center at (877) 740-1900

L5CHHP6500

The TCMax Mobile Pocket PC

Handle physical inventories quickly and simply. From anywhere in the plant or facility.

- **L5CHHP6500** with a built-in imager for both 1-D and 2-D barcodes. It talks to you just like TCMax on a PC. It's perfect for performing physical inventories of assets or for issuing and turning in items at a remote location.

Text DataMatrix Barcoding. Higher Security. Broader Flexibility.

- Today's most advanced, most secure barcoding system. Up to nine characters of information encoded in small square or rectangular marks.
- Identify, track and control every tool, instrument and piece of equipment in your inventory. The marks are permanent and can be placed and read on almost any metal or plastic surface – even curved surfaces.
- There is no better way to protect and control your assets and your costs than DataMatrix Barcoding from Snap-on.
- Laser engraving application
- Encode both text and raw data
- Wear and tamper-proof
- Flat and curved surfaces
- Limit of 9 characters for laser marks

TOOL CHITS

Problem: FOD

Foreign Object Debris costs the aerospace industry millions of dollars each year in damage to equipment and personnel.

Solution: Tool Chits

A Personalized Tool Management System

- Tool Chits allow an immediate visual accounting for all tools in a drawer
- Tool Chits promote personal accountability
- Tool Chits are simple to implement and use
- Tool Chits reduce and minimize tool loss
- A Tool Chit program is easy to tie into an existing system
- Custom Tool Chits are available with sequential numbers, employee photos, and your logo

Ordering Tool Chits Is easy!

1. Send your logo in jpg or bmp format.
2. Send photos in jpg or bmp format with unique file names.
3. Send data for text in an Excel, Access, or comma-delimited ASCII format.

For more information contact your Snap-on Industrial representative.

Stock No.	Description	Pack Quantity
L5C019BT10	Tool Chit Broken Tool	10
L5C019CC10	Tool Chit Cal-Cert	10
L5C019NT10	Tool Chit No Tool	10
L5C019TR10	Tool Chit Tool Repair	10
L5C019TT45	Tempoary Tool Chits	45
MSI36929172	Brass Chits	50

⚠ WARNING

LEVEL 5 Tool Control System™

Simple, scalable tool control starts with centralized access control.

Tool control systems control tool shrinkage and replacement cost. They also help reduce lost-tool downtime. In critical industries and applications such as aviation and nuclear power, tool control is an essential step toward eliminating FOD (Foreign Object Damage in aviation) and implementing FME (Foreign Material Exclusion in the power industry). Unlocked and open access tool boxes can result in FOD/FME problems. Snap-on puts you in control with three choices. Our Level 5™ Keyless Entry system (N034-N035) allows you to specify access to boxes, audit when they are used, and manage it all over a network.

Our Level 5™ ATC system provides the simplest and most user-friendly solution for detecting tools issued from and returned to a tool box, providing a critical enhancement to your FOD/FME program. Using advanced digital imaging technology and proprietary software, the tool box automatically keeps track of its inventory by user, and records which tools are removed and replaced, and when.

Level 5™ ATC Advanced technology that makes tracking tools simple.

Level 5™ ATC is a true tool control system. Based on the tool list that you supply, each drawer in the tool box is organized and each tool assigned to a unique space in the foam drawer liner. That information is then programmed into the scanning hardware fitted to the top of the box. As each drawer is opened and closed it is scanned digitally, and the image is instantly compared with the baseline stored image of that drawer. Any tool that has been removed or returned is identified and the computer makes an audible announcement: a tool has been removed or replaced.

Additionally, the computer tracks each tool removed and replaced by its part number and by user, and creates an audit trail in database format. Both the digital images and the data entries are stored for review in an audit trail of the last 15,000 transactions. Not only do you get detailed information, but you have access to the actual pictures of the drawer contents for verification.

Plug and Play vs. Some Assembly Required

Some solutions to FOD and FME problem involve attaching RFID tags, sensors or bar codes to the tools to track them. Additional operations and attachments can create significant additional cost and limitations by:

- Interfering with the normal use of the tool
- Using up additional real estate in the drawers
- Having limited usability on small tools like sockets
- Dislodging and becoming a new source of FOD

Level 5™ ATC Features

- No individual tool scanning required
- No RFID tags to install or replace
- No limitations on tool size—if it fits in the drawer, it works
- Intuitive interface—easy-to-use touchscreen
- Audible voice confirmation of tool removal and replacement
- Automatic locking
- Errors announced and displayed for incorrect tool position or drawer not closed

The Snap-on Level 5™ ATC system is delivered with your predetermined set of tools already installed in one of two basic platforms, the KRL1056 36" framework, or the KRL1021 54" framework. Each is offered in eleven color choices, three different drawer configuration options, with and without casters, and in 110V or 230V European power options.
To order, work with your Snap-on Industrial Account Manager or Customer Service Center to determine:

- Tool Set Contents
- 36" or 54" platform
- Color choice
- Drawer configuration
- Casters/no casters
- Voltage 110V/230V
- Standard or extended warranty
- Administrative software, with or without remote HID scanner

Technical Support is just a phone call away!
(800) 272-2033

LEVEL 5 Tool Control System™

EXCLUSIVE

It's no secret that the Snap-on Level 5™ Automated Tool Control System is the most comprehensive program of its kind in the industry. Using advanced digital imaging technology and proprietary software, ATC automatically keeps track of its inventory by user and records which tools are removed and replaced—all in real time. And now, you can take this revolutionary system where you need it, thanks to the new on-board rechargeable batteries. Moving ATC closer to the action improves productivity, saving time and money.

An automatic tool control system that's as mobile as you are

Features and Benefits

Rechargeable Batteries
Both 36-inch and 54-inch ATC platforms include 6 rechargeable, interchangeable batteries, providing up to 16 hours of battery life (two 8-hour shifts). The hot-swappable feature allows workers to easily replace an existing battery with a charged battery without impacting productivity.

Recharge Options
Batteries can be fully recharged in 3.5 hours using the internal charging system by plugging in the ATC. An optional, stand-alone battery charger is available which charges up to 6 batteries in 4 hours. Extra batteries are available individually or in a set of 6.

Safety and Protection
Snap-on rechargeable batteries feature state-of-the art circuit protection that prevents overload. For safety, the batteries will shutdown if they reach an upper heat limit, (well below critical stages) or if there is an accidental shortage.

Battery Monitoring
The ATC system monitors the batteries so you don't have to. A visual indicator shows discharge levels and the system verbally announces low battery levels. When batteries are critically low, the ATC system safely shuts down the system and all components.

Battery Tracking
Each battery is recorded in the ATC system by a serial number and is tracked like a tool. The ATC system records an event each time a battery is removed or replaced.

LEVEL 5 Tool Control System™

Selection Guide

How to Order

The Snap-on Level 5™ ATC system is delivered with your predetermined set of tools already installed in one of two basic platforms, 36" or 54". Each is offered in eleven color choices, three different drawer configuration options, with and without casters, and in 110V or 230V European power options. To order, work with your Snap-on Industrial Account Manager or Customer Service Center to determine:

Step 1 Tool Set Contents—pick the tools you need and we will lay out the drawer arrangements
Step 2 36" or 54" Platform—we'll help you pick the right platform based on the number of tools in your set
Step 3 Color Choice—pick one of eleven
Step 4 Drawer Configuration—pick one of three
Step 5 Casters—with or without, depending on mobility requirements
Step 6 Voltage—110V or 230V European
Step 7 Warranty—standard or extended
Step 8 Order Administrative Software, with Remote HID Scanner

Configuration		36" w/ Casters			36" w/out Casters			54" w/ Casters			54" w/out Casters		
Number of Drawers		6	7	8	6	7	8	6	7	8	6	7	8
													
Color	V												
Red	110V	L5AA363BO	L5AA362BO	L5AA361BO	L5AA3S3BO	L5AA3S2BO	L5AA3S1BO	L5AA543BO	L5AA542BO	L5AA541BO	L5AA5S3BO	L5AA5S2BO	L5AA5S1BO
	230V	L5AE363BO	L5AE362BO	L5AE361BO	L5AE3S3BO	L5AE3S2BO	L5AE3S1BO	L5AE543BO	L5AE542BO	L5AE541BO	L5AE5S3BO	L5AE5S2BO	L5AE5S1BO
Royal Blue	110V	L5AA363CM	L5AA362CM	L5AA361CM	L5AA3S3CM	L5AA3S2CM	L5AA3S1CM	L5AA543CM	L5AA542CM	L5AA541CM	L5AA5S3CM	L5AA5S2CM	L5AA5S1CM
	230V	L5AE363CM	L5AE362CM	L5AE361CM	L5AE3S3CM	L5AE3S2CM	L5AE3S1CM	L5AE543CM	L5AE542CM	L5AE541CM	L5AE5S3CM	L5AE5S2CM	L5AE5S1CM
Ultra Yellow	110V	L5AA363ES	L5AA362ES	L5AA361ES	L5AA3S3ES	L5AA3S2ES	L5AA3S1ES	L5AA543ES	L5AA542ES	L5AA541ES	L5AA5S3ES	L5AA5S2ES	L5AA5S1ES
	230V	L5AE363ES	L5AE362ES	L5AE361ES	L5AE3S3ES	L5AE3S2ES	L5AE3S1ES	L5AE543ES	L5AE542ES	L5AE541ES	L5AE5S3ES	L5AE5S2ES	L5AE5S1ES
Candy Apple Red	110V	L5AA363JH	L5AA362JH	L5AA361JH	L5AA3S3JH	L5AA3S2JH	L5AA3S1JH	L5AA543JH	L5AA542JH	L5AA541JH	L5AA5S3JH	L5AA5S2JH	L5AA5S1JH
	230V	L5AE363JH	L5AE362JH	L5AE361JH	L5AE3S3JH	L5AE3S2JH	L5AE3S1JH	L5AE543JH	L5AE542JH	L5AE541JH	L5AE5S3JH	L5AE5S2JH	L5AE5S1JH
Extreme Green	110V	L5AA363JJ	L5AA362JJ	L5AA361JJ	L5AA3S3JJ	L5AA3S2JJ	L5AA3S1JJ	L5AA543JJ	L5AA542JJ	L5AA541JJ	L5AA5S3JJ	L5AA5S2JJ	L5AA5S1JJ
	230V	L5AE363JJ	L5AE362JJ	L5AE361JJ	L5AE3S3JJ	L5AE3S2JJ	L5AE3S1JJ	L5AE543JJ	L5AE542JJ	L5AE541JJ	L5AE5S3JJ	L5AE5S2JJ	L5AE5S1JJ
Electric Orange	110V	L5AA363JK	L5AA362JK	L5AA361JK	L5AA3S3JK	L5AA3S2JK	L5AA3S1JK	L5AA543JK	L5AA542JK	L5AA541JK	L5AA5S3JK	L5AA5S2JK	L5AA5S1JK
	230V	L5AE363JK	L5AE362JK	L5AE361JK	L5AE3S3JK	L5AE3S2JK	L5AE3S1JK	L5AE543JK	L5AE542JK	L5AE541JK	L5AE5S3JK	L5AE5S2JK	L5AE5S1JK
Arctic Silver	110V	L5AA363KS	L5AA362KS	L5AA361KS	L5AA3S3KS	L5AA3S2KS	L5AA3S1KS	L5AA543KS	L5AA542KS	L5AA541KS	L5AA5S3KS	L5AA5S2KS	L5AA5S1KS
	230V	L5AE363KS	L5AE362KS	L5AE361KS	L5AE3S3KS	L5AE3S2KS	L5AE3S1KS	L5AE543KS	L5AE542KS	L5AE541KS	L5AE5S3KS	L5AE5S2KS	L5AE5S1KS
Gloss Black	110V	L5AA363PC	L5AA362PC	L5AA361PC	L5AA3S3PC	L5AA3S2PC	L5AA3S1PC	L5AA543PC	L5AA542PC	L5AA541PC	L5AA5S3PC	L5AA5S2PC	L5AA5S1PC
	230V	L5AE363PC	L5AE362PC	L5AE361PC	L5AE3S3PC	L5AE3S2PC	L5AE3S1PC	L5AE543PC	L5AE542PC	L5AE541PC	L5AE5S3PC	L5AE5S2PC	L5AE5S1PC
Deep Cranberry	110V	L5AA363PM	L5AA362PM	L5AA361PM	L5AA3S3PM	L5AA3S2PM	L5AA3S1PM	L5AA543PM	L5AA542PM	L5AA541PM	L5AA5S3PM	L5AA5S2PM	L5AA5S1PM
	230V	L5AE363PM	L5AE362PM	L5AE361PM	L5AE3S3PM	L5AE3S2PM	L5AE3S1PM	L5AE543PM	L5AE542PM	L5AE541PM	L5AE5S3PM	L5AE5S2PM	L5AE5S1PM

Software

- **L5A0298J11A -** Administrative Software with Employee Badge Scanner

Platform Available

- 36" single bank roll cab, approximate capacity 450 tools
- 54" single bank roll cab, approximate capacity 750 tools

Features and Specifications

- 1 year electronics warranty
- Extended warranty available
- 110V/230V AC power required
- Unlimited number of assigned users
- Networking through Ethernet or wireless
- 1 copy of ATC software required for each administrator

Protect Your Investment with a Snap-On Service Plan

Snap-on offers one, two and three year service plans that will help keep your system fully mission capable, and includes services such as software updates, extra foam cutting and annual inspections

LEVEL 5 Tool Control System™

Selection Guide

Create Your Ideal System

The Snap-on Level 5™ Rechargeable ATC system is delivered with your predetermined set of tools already installed in one of two basic platforms, 36" or 54". Each is offered in up to four different drawer configurations and 5 color choices.

36-Inch Rechargeable ATC

	6 Drawer	7 Drawer	8 Drawer	9 Drawer
Red	L5ARC363BO	L5ARC362BO	L5ARC361BO	L5ARC360BO
Royal Blue	L5ARC363CM	L5ARC362CM	L5ARC361CM	L5ARC360CM
Ultra Yellow	L5ARC363ES	L5ARC362ES	L5ARC361ES	-
Arctic Silver	L5ARC363KS	L5ARC362KS	L5ARC361KS	-
Gloss Black	L5ARC363PC	L5ARC362PC	L5ARC361PC	-

54-Inch Rechargeable ATC

	6 Drawer	7 Drawer	8 Drawer	9 Drawer
				
Red	L5ARC543BO	L5ARC542BO	L5ARC541BO	L5ARC540BO
Royal Blue	L5ARC543CM	L5ARC542CM	L5ARC541CM	L5ARC540CM
Ultra Yellow	L5ARC543ES	L5ARC542ES	L5ARC541ES	-
Arctic Silver	L5ARC543KS	L5ARC542KS	L5ARC541KS	-
Gloss Black	L5ARC543PC	L5ARC542PC	L5ARC541PC	-

ACCESSORIES

KACL536PC – Cover for 36" Standard ATC
KACL554PC – Cover for 54" Standard ATC
KACL536RCPC – Cover for 36" Rechargeable ATC
KACL554RCPC – Cover for 54" Rechargeable ATC

L5A0298J21A – Battery Charger
L5A0298J20A – 6 Pack Batteries
L5A0298J19A – Individual Batteries
L5A0298J11A – Administrator software w/badge scanner

To order product, contact your Snap-on Industrial Account Manager or call the Snap-on Industrial Customer Service Center 1-877-740-1900.
To view our Industrial website go to www1.snapon.com/industrial

WARNING

- Do not use chrome or industrial finish tools with impact drivers
- Keep hands away from pinch points when operating a pneumatic torque wrench
- Read safety precautions on pages W1 to W4

18 Inch All Weather Mobile Storage Chest

The most durable, most versatile, and most functional chest in its category. Its wider wheel base and telescoping handle makes for more stable and easier transport. Secure latching allows for better security, yet is easy to use. Accommodates up to 10 drawers, in 3 different sizes, for the greatest flexibility of tool storage. And of course, nothing can protect your tools better from the elements.

Fully Enclosed Ball Bearing Wheels On Wide Corners

- 22" wheel base improves stability during transport
- Can open the lid without having to flip the box over on its side
- Simple, fast field repair capability reduces downtime and frustration
- Solid rubber wheels absorb shock of rough surfaces

Four Bar Latches

- Prevents accidental opening
- Can be released with one hand
- Simple and secure
- Superior to swing latch offered on competitive cases

Telescoping Trolley Handle

- Comfortable for people between the 5th and 95th percentile height
- Extends to three positions: 36", 39" and 43"
- Competition has only one position

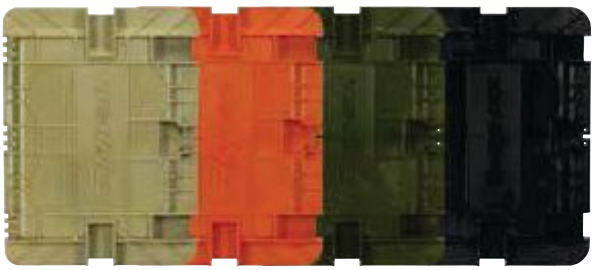

Cover Swings Open On Top and Can Be Used As a Seat

- Made possible by durable butterfly hinges with stainless steel hardware
- Passivated stainless steel resists corrosion in harsh environments

Drawers Fully Extend on Snap-On's Proprietary, Composite Slides and Rails

- Loaded drawers extend fully so the entire contents of the drawer may be easily viewed
- Two drawer sizes 1-1/4" & 2-3/4"

Meets/Exceeds Applicable Standards

- MIL 810 Environmental Resistance and Performance
- MIL 1916 Quality Standard

Stock No.	Color	Description
KMC18062NBK	Black	2 Two-inch drawers plus 6 one-inch drawers
KMC18043NBK	Black	3 Two-inch drawers plus 4 one-inch drawers
KMC18062NGR	Olive	2 Two-inch drawers plus 6 one-inch drawers
KMC18043NGR	Olive	3 Two-inch drawers plus 4 one-inch drawers
KMC18062NTN	Tan	2 Two-inch drawers plus 6 one-inch drawers
KMC18043NTN	Tan	3 Two-inch drawers plus 4 one-inch drawers
KMC18062NOR	Orange	2 Two-inch drawers plus 6 one-inch drawers
KMC18043NOR	Orange	3 Two-inch drawers plus 4 one-inch drawers

Service Parts Available

- Drawers
- Slides
- Self Support
- Side Handle Kit
- Telescoping Handle Kit
- Wheel Kit
- Lock Kit
- Two-motion Latch Kit

Optional Accessories

JIKMC18-7NS - Non-Slip Drawer Liner Set, 7 pieces
TCK18043BR - Tool Control Kit for KMC18, 7-drawer series

18 Inch All Weather Mobile Storage Chest

The most durable, most versatile, and most functional chest in its category. Its wider wheel base and telescoping handle makes for more stable and easier transport.

Secure latching allows for better security, yet is easy to use. Accommodates up to 10 drawers, in 2 different sizes, for the greatest flexibility of tool storage. And of course, nothing can protect your tools better from the elements.

Fully enclosed ball bearing wheels on wide corners
- 22" wheel base improves stability during transport
- Can open the lid without having to flip the box over on its side
- Simple, fast field repair capability reduces downtime and frustration
- Solid rubber wheels absorb shock of rough surfaces
- Four bar latches
- Prevents accidental opening
- Superior to swing latch offered on competitive cases
- Telescoping trolley handle
- Extends to three positions: 36", 39" and 43"
- Cover swings open on top and can be used as a seat
- Made possible by durable butterfly hinges with stainless steel hardware
- Passivated stainless steel resists corrosion in harsh environments
- Drawers fully extend on Snap-on's proprietary, composite slides and rails
- Loaded drawers extend fully so the entire contents of the drawer may be easily viewed
- There are 10 drawer slide positions available. Single drawers include one slide; double drawers include two slides. A total of 10 slides will fit.
- Case is furnished without drawers, which are ordered separately.
- A combination of drawers totaling 10 slides may be accomodated.
- Examples: Ten single drawers, five double drawers, six single and two double drawers, etc.

Shown without drawers, drawer configuration is customizable

Stock No.	Color	Description
KMC18000NBK	Black	18 in. All Weather Mobile Storage Chest - No Drawers
KMC18000NGR	Green	18 in. All Weather Mobile Storage Chest - No Drawers
KMC18000NOR	Orange	18 in. All Weather Mobile Storage Chest - No Drawers
KMC18000NTN	Tan	18 in. All Weather Mobile Storage Chest - No Drawers
KMC18043NRD	Red	18 in. All Weather Mobile Storage Chest - No Drawers
KMC18-1DRW		1" Deep Drawer
KMC18-2DRW		2" Deep Drawer
KMC18-3DRW		3" Deep Drawer

All-Weather Tool Chest Safety Sling

WFXTHSSAWTC Tool Chest Safety Sling

- Specially designed to safely hoist the Snap-on KMC18 series of all-weather tool chests (Approved for use with the KMC18 series only)
- Made by Wear-Flex, the acknowledged leader in the field of synthetic slings for over 40 years
- Every Safety Sling has a heat imprinted sewn-on bag that includes the rated capacity and sling serial number for easy identification to satisfy inspection records
- 500-lb. weight limit
- Includes attached use and care instructions

WFXTHSSAWTC

Soft-Sided Tool Bag with Wheels and a Telescoping Handle

TB50W Soft-Sided Tool Bag

- Multiple pockets inside and outside, to store a multitude of smaller items
- Large gate mouth opening to store larger items and for easy access
- Made of durable 1680 denier oxford nylon fabric, for strength and durability
- Telescoping handle with wheels, to roll rather than carry the bag
- Dimensions – 20" W x 12" H x 12" D

TB50W

SENTINEL®

SUPERIOR PROTECTION. GUARANTEED FOR LIFE.

Snap-on is proud to offer Sentinel® injection-molded cases, manufactured by Gemstar. These rugged cases are airtight, waterproof and dustproof so they stand-up to even the harshest environments. Every case is designed to withstand incredible abuse in any situation, so it's no surprise that Sentinel cases have seen it all, from frontline combat to backwoods research.

Models and Dimensions

Stock No.	Outside Dimension	Inside Dimension	Lid Depth	Bottom Depth	Approx. Weight
SEN12X10X5	10.3" x 12.4" x 5.3"	8.2" x 10.1"	1.2"	3.5"	3.2 lbs.
SEN12X10X9	10.3" x 12.4" x 8.7"	8.2" x 10.1"	1.2"	6.9"	4.1 lbs.
SEN14X12X5	11.9" x 14.0" x 5.4"	9.4" x 12.5"	1.3"	3.6"	4.0 lbs.
SEN14X12X7	11.9" x 14.0" x 6.9"	9.4" x 12.5"	1.3"	5.1"	4.6 lbs.
SEN17X14X7	13.6" x 17.2" x 6.4"	11.1" x 15.8"	1.4"	4.3"	6.0 lbs.
SEN17X14X11	13.6" x 17.2" x 10.6"	11.1" x 15.8"	1.4"	8.5"	7.4 lbs.
SEN22X15X9 *	14.8" x 22.2" x 9.0"	12.3" x 19.7"	1.9"	5.4"	11.6 lbs.
SEN20X16X6	15.6" x 19.6" x 5.7"	13.0" x 17.9"	1.4"	3.6"	6.6 lbs.
SEN20X16X7	15.6" x 19.6" x 7.2"	13.0" x 17.9"	1.4"	5.2"	7.1 lbs.
SEN22X17X9	16.6" x 22.1" x 8.5"	14.1" x 20.5"	1.4"	6.5"	9.1 lbs.
SEN25X19X9	18.6" x 25.3" x 8.6"	16.1" x 22.5"	1.9"	6.0"	11.5 lbs.
SEN25X19X12 *	18.6" x 25.3" x 11.7"	16.1" x 22.5"	1.9"	8.0"	17.7 lbs.
SEN27X21X10 *	20.5" x 27.3" x 9.7"	17.9" x 24.1"	1.9"	6.1"	18.2 lbs.
SEN27X21X14 *	20.5" x 27.3" x 13.7"	17.9" x 24.1"	1.9"	10.1"	20.5 lbs.

*Includes wheels and extension handle

Specifications and Certifications

Case Specification	
Country of Origin	USA
Material	Copolymer
Minimum Temperature	-40°F (-40°C)
Maximum Temperature	160°F (71.1°C)

Certifications	
Drop	ATA 300 Revision 2006.1, Appendix B-2-1.1
Falling Dart Impact	ATA 300 Revision 2006.1, Appendix B-2-1.2
Vibration – Loose Cargo	Fed-STD-101C, Method 5019
Vibration – Sweep	ASTM D-999-07, Procedure B
Immersion	MIL-STD-810F, Method 512.4

Shown with optional foam

PORTABLE TOOL CASES

Pelican Micro and Medium Cases

Micro Cases

Stock No.	PCD1020100	PCD1040100	PCD1060100
Exterior Dimensions (L x W x D)	6.82" x 4.75" x 2.12" (17.3 x 12.1 x 5.4 cm)	7.50" x 5.06" x 2.12" (19 x 12.8 x 5.4 cm)	9.37" x 5.56" x 2.62" (23.8 x 14.1 x 6.7 cm)
Interior Dimensions (L x W x D)	5.31" x 3.56" x 1.68" (13.5 x 9 x 4.3 cm)	6.50" x 3.87" x 1.75" (16.5 x 9.8 x 4.4 cm)	8.25" x 4.25" x 2.25" (20.9 x 10.8 x 5.7 cm)
Weight	0.55 lbs. (0.25 kg)	0.7 lbs. (0.32 kg)	1 lbs. (0.45 kg)

GREAT FOR RUGGED SPORTS - NOT FOR SWIMMING OR SUBMERGING

- Easy open latch, includes carabiner
- Stainless steel hardware with rubber liner that doubles as o-ring seal
- Water resistant, crushproof, and dust proof
- Automatic Pressure Equalization Valve - balances interior pressure, keeps water out

Medium Cases

Model	Stock No.	Color	Exterior Diminsions	Interior Dimensions	Lid / Bottom Depth	Weight
1450	PCD1450110	Black	16.00" X 13.00" X 6.87" (40.6 X 33 X 17.4 cm)"	14.62" X 10.18" X 6.00" (37.1 X 25.8 X 15.2 cm)"	1.75" / 4.25" (4.4 cm / 10.8 cm)"	5.51 LBS. (2.5 KG)"
	PCD1450130	OD Green				
	PCD1450240	Yellow				
1460	PCD1460110	Black	20.85" x 12.73 x 12.75" (52.9 x 32.3 x 32.4 cm)	18.54" x 9.92" x 10.92" (47.1 x 25.2 x 27.7 cm)	4.91" / 6.01" (12.5 cm / 27.7 cm)	12.48 lbs. (5.66 kg)
	PCD1460130	OD Green				
	PCD1460190	Desert Tan				
1510	PCD1510110	Black	22.00" X 13.81" X 9.00" (55.9 X 35.1 X 22.9 cm)"	19.75" X 11.00" X 7.60" (50.1 X 27.9 X 19.3 cm)	1.79" / 5.79" (4.5 cm / 14.7 cm)"	11.99 LBS. (5.44 KG)"
	PCD1510130	OD Green				
1520	PCD1520110	Black	19.78" X 15.77" X 7.41" (50.2 X 40 X 18.8 cm)"	18.06" X 12.89" X 6.72" (45.9 X 32.7 X 17.1 cm)"	1.79" / 4.93" (4.5 cm / 12.5 cm)"	8.29 LBS. (3.76 KG)"
	PCD1520130	OD Green				
	PCD1520240	Yellow				
1550	PCD1550110	Black	20.62" X 16.87" X 8.12" (52.4 X 42.8 X 20.6 cm)"	18.43" X 14.00" X 7.62" (46.8 X 35.5 X 19.3 cm)"	1.75" / 5.87" (4.4 cm / 14.9 cm)"	10.58 LBS. (4.8 KG)"
	PCD1550130	OD Green				
	PCD1550240	Yellow				

Model 1450

Model 1460

Model 1510*

Model 1520

Model 1550

- Open cell core with solid wall design is strong, light weight, watertight, crushproof, and dust proof
- Easy open Double Throw latches and O-ring seal with Automatic Pressure Equalization Valve
- Comfortable rubber over-molded handle and stainless steel hardware and padlock protectors
- Cases do not include tools or foam inserts

* Model 1510 Carry-On Case is the FAA maximum carry-on size, and includes retractable handle and wheels with stainless steel bearings

OD Green

Yellow

PORTABLE TOOL CASES

Pelican Large Cases

Large Cases

Model	Stock No.	Color	Exterior Diminsions	Interior Dimensions	Lid / Bottom Depth	Weight
1600	PCD1600110	Black	24.25" X 19.43" X 8.68" (61.6 X 49.3 X 22 cm)	21.43" X 16.50" X 7.87" (54.4 X 41.9 X 20 cm)	1.75" / 6.12" (4.4 cm / 15.5 cm)	13 LBS. (5.9 KG)
	PCD1600130	OD Green				
	PCD1600240	Yellow				
1610	PCD1610110	Black	24.83" x 19.69" x 11.88" (63 x 50 x 30.2 cm)	21.78" x 16.69" x 10.62" (55.3 x 42.4 x 27 cm)	2.05" / 8.57" (5.2 cm / 21.8 cm)	19.5 lbs. (8.85 kg)
	PCD1610130	OD Green				
1620	PCD1620110	Black	24.64" x 19.39" x 13.78" (62.6 x 49.2 x 35 cm)	21.48" x 16.42" x 12.54" (54.5 x 41.7 x 31.8 cm)	2.01" / 10.53" (5.1cm / 26.7 cm)	21.2 lbs. (9.62 kg)
	PCD1620130	OD Green				
1650	PCD1650110	Black	31.59" x 20.47" x 12.45" (80.2 x 52 x 31.6 cm)	28.57" x 17.52" x 10.62" (72.5 x 44.5 x 27 cm)	1.81" / 8.84" (4.6 cm / 22.4 cm)	24.03 lbs. (10.9 kg)
	PCD1650130	OD Green				

Model 1600*

Model 1610

Model 1620

Model 1650

- Retractable extension handle and strong polyurethane wheels with stainless steel bearings***
- Open cell core with solid wall design is strong, light weight, watertight, crushproof, and dust proof
- Easy open Double Throw latches and O-ring seal with Automatic Pressure Equalization Valve
- Comfortable rubber over-molded handle and stainless steel hardware and padlock protectors
- Cases do not include tools or foam inserts

* Model 1600 does not include retractable handle or wheels

Laptop Cases

Model	Stock No.	Color	Exterior Diminsions	Interior Dimensions	Lid / Bottom Depth	Weight
1055	PCD1055110	Black	9.42" x 7.02" x 1.24" (23.9 x 17.8 x 3.1 cm)	8.55" x 5.52" x 0.85" (21.7 x 14 x 2.2 cm)	0.43" / 0.85" (1.1 cm / 2.2 cm)	0.82 lbs. (0.37 kg)
1065	PCD1065110	Black	10.86" x 9.28" x 1.24" (27.6 x 23.6 x 3.1 cm)	9.96" x 7.76" x 0.81" (25.3 x 19.7 x 2.1 cm)	0.41" / 0.81" (1 cm / 2.1 cm)	1.25 lbs. (0.57 kg)
1075	PCD1070110	Black	12.38" x 9.75" x 2.13" (31.4 x 24.8 x 5.4 cm)	11.11" x 7.92" x 1.63" (28.2 x 20.1 x 4.1 cm)	0.81" / 1.63" (2.1 cm / 4.1 cm)	1.54 lbs. (0.7 kg)

Model 1055

Model 1065

Model 1075

- Model 1055 - Designed to protect the most popular eReaders and 7 inch tablets
- Model 1065 - Designed to protect the most popular 10 inch tablets including iPad®, iPad® 2 with smart cover
- Model 1075 - Designed to protect the most popular netbooks up to 11.3" x 8.1" x 1.6"
- Watertight Gasket – Tight seal created when case is shut
- The easy open latch remains shut under pressure or after impact
- Automatic Purge Valve – Keeps water and dust out while balancing air pressure
- Molded plush shock absorbing liner protects contents from impact and scratching

PELICAN

0450 Mobile Tool Chest

- Heavy duty buttress hinges and two way handles
- Auto Pressure Equalization Valves
- Stable, wide track mobility
- Includes 7 drawers
- Hybrid double throw butterfly latches
- Graduated deflector ribs and secure stack design
- Trolley handle & wheel system
- Easy access beneath the top lid for extra storage space
- Three unsealed pockets on the left side for storing smaller items
- Exterior dimensions: 23.95" x 14.75" x 17.95" (60.8 x 37.5 x 45.6 cm)
- Interior Dimensions: 20.56" x 10.97" x 12.65" (52.2 x 27.9 x 32.1 cm)
- Weight: 41.5 LBS. (18.82 KG)
- Tools and foam shown are not included
- Stock Number **PCD0450110**

Snap-on Industrial offers complete custom tool set and tool control services for this and all Pelican cases shown. Contact your Snap-on Industrial Representative for more information, or call our Customer Service Center at (877) 740-1900

Model PCD0450110

Stock No.	Interior Dimensions L x W x H (inches)	Exterior Dimensions L x W x H (inches)	Empty Weight (lbs.)	Wheels	Retractable Handle	Airline Carry-on	NSN Available
HIM20500000	9.5 x 7.5 x 4.25	11.8 x 9.8 x 4.7	2.7	N	N	Y	Y
HIM21000000	13.0 x 9.2 x 6.0	14.2 x 11.4 x 6.5	4.2	N	N	Y	Y
HIM22000000	15.0 x 10.5 x 6.0	16.2 x 12.7x 6.6	4.9	N	N	Y	Y
HIM23000000	17.0 x 11.7 x 6.2	18.2 x 13.4 x 6.7	5.8	N	N	Y	Y
HIM24000000	18.0 x 13.0 x 6.7	19.2 x 15.2 x 7.3	6.5	N	N	Y	Y
HIM25000000	20.5 x 11.5 x 7.2	21.7 x 14.1x 8.9	11	Y	Y	Y	Y
HIM26000000	20.0 x 14.0 x 7.7	21.2 x 16.0 x 8.3	8.5	N	N	N	Y
HIM27000000	22.0 x 17.0 x 8.0	24.6 x 19.7 x 8.6	11.1	N	N	N	Y
HIM27200000	22.0 x 17.0 x 10.0	24.6 x 19.7 x 11.7	16.8	Y	Y	N	Y
HIM27500000	22.0 x 17.0 x 12.7	24.6 x 19.7 x 14.4	18.5	Y	Y	N	Y
HIM29500000	29.0 x 18.0 x 10.5	31.3 x 20.4 x 12.2	20.8	Y	Y	N	Y
HIM29750000	29.0 x 18.0 x 13.8	31.3 x 20.4 x 15.5	22.5	Y	Y	N	Y
HIM31000000	36.5 x 14.0 x 6.0	39.8 x 16.5 x 6.7	15.2	Y	N	N	Y
HIM33000000	50.5 x 14.0 x 6.0	53.8 x 16.5 x 6.7	19	Y	N	N	Y

- Press & Pull Latches, double-layered, soft-grip handle, padlockable hasps, and Vortex® Valve
- Built to withstand impact, temperature, moisture, and rough transit
- Anti-shear teeth keep lids from shifting during impact
- Uniquely designed hinges with feet to allow sturdy upright standing
- Cases furnished in black. For other color options, contact your Snap-on Industrial Representative

LASER ENGRAVERS

LASV10W Laser Engraver

The LASV10W System is the latest in cutting-edge fiber laser technology for industrial laser marking/ID/traceability applications. Characteristic of this laser system is the excellent beam quality necessary for marking/engraving a broad range of materials. This system requires no chemicals during use, simplifying operations and eliminating the need for potentially hazardous materials and special handling. No MSDS is necessary.

- Best results on any metal: steel, titanium, aluminum (bare, anodized or coated), as well as plastics (such as ABS, Lexan,PES, PET, PVC), polycarbonate and more.
- Applications include tool, automotive, aerospace, medical device, electronic, semiconductor, jewelry corporate awards, firearms manufacturing and many more.

Benefits of the LASV10W system include:

- High speed, high quality marking/engraving
- User friendly software and hardware
- Serialization, 1D & 2D barcode generation (including UID)
- Compact modular design
- Robust and flexible enclosure/workstation
- Low cost of ownership
- No maintenance
- Completely air cooled
- Low power consumption: 90 – 240 VAC
- 2 year warranty
- On-site set-up and training included

Accessories

Stock No.	Description
LASV10W-PD	Pneumatic door for enclosure - Must be specified at time of original order
LASV10W-MB	Mobile base with lockable casters and monitor arm
LASV10W-FE	Trolley-style 110VAC fume extractor
LASV10W-PC	AC Power conditioner
LASRING.DIV	Rotary Stepper

All units work on both 110 and 230 Volts, 50/60 Hz

- Snap-on Industrial follows a policy of continuous product improvement.
- Specifications are subject to change without notice.
- LASV10W is a class 4 laser source. Laser interaction with organic or inorganic material can cause TOXIC FUMES and PARTICLES.
- The operator shall provide interlocks, indicators and other appropriate safety features, in full compliance with 21 CFR 1040 and/or other applicable national and local regulations.

LASV20W Laser Engraver

The LASV10W System is the latest in cutting-edge fiber laser technology for industrial laser marking/ID/traceability applications. Characteristic of this laser system is the excellent beam quality necessary for marking/engraving a broad range of materials. This system requires no chemicals during use, simplifying operations and eliminating the need for potentially hazardous materials and special handling. No MSDS is necessary.

- Best results on any metal: steel, titanium, aluminum (bare, anodized or coated), as well as plastics (such as ABS, Lexan,PES, PET, PVC), polycarbonate and more.
- Applications include tool, automotive, aerospace, medical device, electronic, semiconductor, jewelry corporate awards, firearms manufacturing and many more.

Benefits of the LASV20W system include:

- High speed, high quality marking/engraving
- User friendly software and hardware
- Serialization, 1D & 2D barcode generation (including UID)
- Compact modular design
- Robust and flexible enclosure/workstation
- Low cost of ownership
- No maintenance
- Completely air cooled
- Low power consumption: 90 – 240 VAC
- 2 year warranty
- On-site set-up and training included

Accessories

Stock No.	Description
LASV10W-PD	Pneumatic door for enclosure - Must be specified at time of original order
LASV10W-MB	Mobile base with lockable casters and monitor arm
LASV10W-FE	Trolley-style 110VAC fume extractor
LASV10W-PC	AC Power conditioner
LASRING.DIV	Rotary Stepper

Rotary Stepper

All units work on both 110 and 230 Volts, 50/60 Hz

- Snap-on Industrial follows a policy of continuous product improvement.
- Specifications are subject to change without notice.
- LASV10W is a class 4 laser source. Laser interaction with organic or inorganic material can cause TOXIC FUMES and PARTICLES.

TOOL STORAGE SYSTEMS

One Drawer at a Time

Safety At Your Fingertips

Snap-on® Drawer Control is an interlocking mechanism that prevents you from opening more than one drawer at a time in each drawer bank. This valuable safety feature helps prevent fully loaded roll cabs from tipping over.

Drawer Control is available for all Snap-on Masters Series products. Call your Snap-on Industrial sales representative for additional information.

How It Works

What makes Drawer Control work? A special interlocking mechanism connects all drawer slides within a given drawer bank. When one drawer is opened the interlocking shaft locks all the other drawer slides in the drawer bank, preventing them from opening. When all drawers are closed, the special interlocking mechanism releases all the drawer slides, allowing you to open any single drawer in the drawer bank. Smart AND safe.

When all drawers are closed the special interlocking mechanism releases the drawer slides, allowing you to open any single drawer in the drawer bank.

When one drawer is opened the special interlocking mechanism connects the remaining drawer slides, preventing them from opening.

Easy To Order.

STANDARD UNITS with One-Drawer-at-a-Time Feature

Other boxes and colors available through Industrial Customer Service Center.

You can order this feature on all new Snap-on Masters series roll cabs and top chests. To order Drawer Control, simply contact our Industrial Customer Service Center (ICSC).

Drawer Control Stock No.	Base Unit
KRDC711	KRL711A
KRDC722	KRL722B
KRDC751	KRL751
KRDC756	KRL756B
KRDC1011	KRL1011A
KRDC1022	KRL1022B
KRDC1023	KRL1023B
KRDC1056	KRL1056C
KRDC1203	KRL1203B
KRDC1251	KRL1251
KRDC7022	KRL7022B
KRDC7023	KRL7023B

Colors Available

Red	Gloss Black	Royal Blue	Ultra Yellow	Candy Apple Red	Extreme Green	Electric Orange	Arctic Silver	Deep Cranberry
PBO	PC	PCM	PES	PJH	PJJ	PJK	PKS	PM

See pages 314 - 333 for the complete selection and specifications for Snap-on Master Series tool storage

AVIATION TOOLS

Overview.....N052

Aviation Tool Sets N054

Aviation Tool Storage N068

FOD & FME Prevention N070

Hi-Lok®, Spline & Aviation Torque..N072

Aerospace Standard Hand Tools N076

Aviation Specialty Hand Tools.....N080

Airframe Tools N083

Aviation Air Tools N114

Specialty Aviation Equipment.....N116

Mastic Removal Tools.....N118

AVIATION TOOLS

SOME OF THE MOST CRITICAL FLIGHT DECISIONS START IN THE HANGAR.

You stand for something bigger than any plane you work on. And while we didn't place that responsibility in your hands, we do provide the tools to do the job right. Every time. At Snap-on, we strictly adhere to all aerospace engineering standards, and we understand the demands pros place on their tools. That's why we provide the right tools for the right jobs – to make your job easier, and provide the solutions you need. Our range of products is second to none, including custom-made applications, ergonomic designs, and more. And the innovation doesn't stop there – in fact at Snap-on, it never stops.

N052

snapon.com/industrial 1.877.740.1900

SNAP-ON GIVES THE AVIATION TECHNICIAN EVERY ADVANTAGE:

ENGINEERING ADVANTAGE
Because techs place great value on quality, performance, reliability and durability, Snap-on builds those qualities into every hand tool we make. For tools that stay in service longer, generate greater productivity, and make income soar, reach for Snap-on hand tools.

POWER ADVANTAGE
Snap-on tools deliver not only power, but performance. The comfort, reliability and durability of Snap-on power tools sets us apart from the rest, and sets you up for successfully completed jobs. Every time. Looking for a powerful ally in the hangar? You've come to the right place.

SPECIALTY ADVANTAGE
The most extensive line of specialty tools in the business is designed to precise heat treatment specs, and built to perform beyond industry inspection standards. And if you don't find what you need, we'll create a custom tool solution to meet your specific needs. For the best airframe maintenance and repair tools, see the specialists: Snap-on.

PRECISION ADVANTAGE
When tightening fasteners means securing aircraft safety, you need the industry leader: the one who gives you more ways to turn fasteners than anyone else and the precision advantage found only in our tools. And when it comes to tool selection and torqueing options, no one gives you more solutions than Snap-on.

SAFETY ADVANTAGE
In an industry that requires absolute attention to detail, you should demand a tool company that provides just that. Snap-on develops the tools and equipment for precise and accurate inspections, leaving no stone – or wing panel – unturned.

CONTROL ADVANTAGE
Snap-on's integrated tool control systems help keep track of your entire inventory. From tethered tools that reduce potentially catastrophic FOD, to our industry-leading Level 5™ Total Asset Management System, our programs give you the control advantage that let you safeguard what matters.

AVIATION TOOL SETS

Military Aviation Tool Sets

Over 30 years of experience and tens of thousands of kits – all custom tailored to suit your needs. Snap-on continues to set the bar for maximum productivity and flight safety.

No one offers you more. More selection. More sets. More experts to assist you. More understanding of your needs. Whether you need one kit or one thousand kits, Snap-on can provide the kit you need for any application.

Contact your Snap-on Industrial sales representative who will be glad to help you select the right tools, tool sets and tool control to meet your specific needs.

Army Kits:
Power Plant
Technical Inspection
General Mechanical
Sheet Metal
Electrical
Hydraulic
Powertrain
Small Arms

USAF Kits:
APG CTK
APG Launch CTK
Custom TDY CTK
Engine CTK
E7E CTK
C130 Mobility

Army Aviation Kits:
AH6, AH7 Crew Chief
Airframe
Blackhawk Phase
Chinook Crew Chief
Crew Chief
Electronics
Engine Shop
Hydraulics Shop
Prop and Rotor

Marine Kits:
Marine Common 1

Navy Kits:
LM2500 Contents

See page N042 for complete details about the Snap-on All Weather Mobile Tool Chest

Acronym	Full Nomenclature
TAMS/APG	Technical Aircraft Maintenance Specialists/ Air Power Generation
AVIONICS	Radar, Instruments, Communications, Navigation, Flight Controls and Electronic Counter Measurers
WEAPONS	Conventional Munitions and Maintenance
APG TDY KIT	Air Plane General Temporary Duty Maintenance
ARMAMENT	Gun, pylon, and launcher Maintenance
PHASE Dock Box	Chronological Inspection and Maintenance
ENGINE BOX	Power Plant, Start Systems and Gear Box Maintenance
DEMO TEAM	F-16/F-15/F-22 Demonstration Minor maintenance Launch and Recover Kit
CANN DOCK BOX	Cannibalization Dock Box
JEIM	Jet Engine Intermediate Maintenance
E & E Box	Electric and Environmental Control Systems
POD Box	Electronic Counter Measurer
Weapons Line Kit	Weapons

Acronym	Full Nomenclature
SPEC BOX	Radar, Instruments, Communications, Navigation, Flight Controls and Electronic Counter Measurers
AGE	Aerospace Ground Equipment
PMEL	Precision Measurement Equipment Laboratory
TRANS	Transportation Vehicle maintenance
E&E In Shop	Electric and Environmental Control Systems
R&R/ RECOVERY	Repair and Reclamation
EGRESS	Ejection Seat Maintenance
Sheet Metal	Structural Repair
LO BARN	LOW Observance Coating Maintenance
Fuel Shop	Fuel System maintenance
TM	Trailer Maintenance
PGM	Precision Guidance munitions
Conventional	Conventional Air to Ground munitions

Commercial Aviation Tool Sets

Our OEM and commercial aviation customers agree: Snap-on is the world leader in custom kits. Whether you're managing a small operation or large fleet, Snap-on can deliver a kitting solution to increase productivity and flight safety; no one offers more. The following is a partial list of the many kits that have been developed with our customers for specific commercial aviation requirements.

For a complete listing of all available kits, or to develop a custom kit, contact your Snap-on Industrial representative.

Boeing:
A-Check Mechanical – all aircraft
A-Check Electrical – all aircraft
B-C-D-Check General Mechanical – all
B-C-D Check Electrical – all aircraft
Boeing and Airbus General Mechanic
Engine Change kits
Sheet Metal kits
Flight Line (FOD bag)
B737 General Mechanic

Airbus:
A-Check Mechanical – all aircraft
A-Check Electrical – all aircraft
B-C-D-Check General Mechanical – all
A350 General Mechanic Kit
A380 Torque Tool & Accessories kit
A380 Bolter kit
A380 Structure kit
A380 Drillers kit
A319, A340, & B737 A-Check General Mechanic
A319, A340, & B737 to B767 A-B-Check General Mechanic kit
A319, A340, & B737 to B767 Electrical
Engine Change kit
Flight Line (FOD bag)

OEM and airline-determined kits:
BAE Systems
Beechcraft
Bombardier
Cessna
Embraer
Falcon
Fokker
Gulfstream
Lear

Helicopter:
Agusta
Bell
Boeing
Eurocopter
Robinson

Propulsion:
GE
Pratt & Whitney
Rolls Royce

From OEM assembly to flight line maintenance, Snap-on has your solution. Contact your Snap-on Industrial sales representative who will be glad to help you select the right tools, tool sets and tool control to meet your specific needs.

WARNING

- Airframe tooling can cause flying chips
- Read safety precautions on pages W1 to W2

TOOL SETS & CUSTOM KITTING

Foreign Object Debris costs the aerospace industry millions of dollars each year in damage to equipment and personnel. Tool control systems control tool shrinkage and replacement cost. They also help reduce lost-tool downtime. In critical industries and applications such as aviation, tool control is an essential step toward eliminating FOD (Foreign Object Damage).

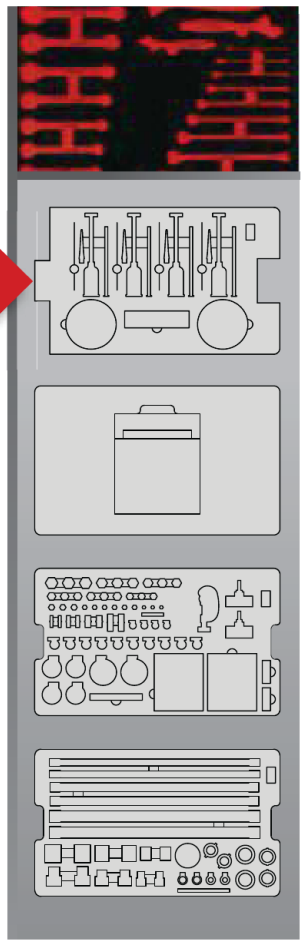

T-BDAR2010
Helicopter Damage Assessment & Repair Kit

T-BDAR2010

- UH-60 Peculiar Ground Support Equipment Deployment Support Kit
- Low Pressure Fluid Line Kit Components in a Pelican 1650 case with foam inserts
- This kit offers maximum durability and mobility and can be deployable by a single maintainer
- Each removable pallet has customized foam inserts for tool control
- Pelican 1650 case dimensions:
  - Exterior dimensions - 31.59" x 20.47" x 12.45"
  - Interior dimensions - 28.57" x 17.52" x 10.62"
  - Empty case weight - 24.03 lbs.
- Pelican 1650 case has an open cell core with solid wall design making it strong, light-weight, watertight, crush-proof and dust-proof
- Pelican 1650 case has a comfortable rubber over-molded handle and stainless steel hardware with padlock protectors
- 60 lbs. fully loaded which requires a two-person lift
- ALWAYS use safety glasses (ask your Snap-on sales representative to see our selection)
- NSN 4920-01-531-1497

Stock No.	Description
T-35236	Tubing cutter
T-DPT0260	Pipe and hose repair kit
T-M/43-12-9	Wire for dbar
T-64040HB	H40SS clamp size 40
T-3604B	MM4SS clamp size 4
T-64008HB	H8SS clamp size 8
T-64028HB	H28SS clamp size 28
T-QQC22X	3⁄8" × 3⁄8" barb coupling
T-QQC33X	1⁄2" × 1⁄2" barb coupling
T-QQC44X	3⁄4" × 3⁄4" barb coupling
T-48758189	A490 hose splicer-bdar
T-PFMF-0106	Pro-flex fitting 1" male
T-PFMF-1212	Pro-flex fitting 1⁄2" male
T-PFMF-3406	Pro-flex fitting 3⁄4" male
T-PFUF-0106	Pro-flex union 1"
T-PFUF-3406	Pro-flex union 3⁄4"
T-PFUF-1212	Pro-flex union 1⁄2"
T-PFCAP-12	CAP 9753K51 1⁄2" proflx 100ct
T-PFCAP-34	CAP 9753K86 3⁄4" proflx 100ct
T-PFCAP-01	CAP 9753K65 1" proflx 50ct
T-31972532	52001 Expand plug 1"
T-31972235	52007 Expand plug .75"
T-31972193	51003 Expand plug .5"
T-31972573	52003 Expand plug 1.5"
T-31972557	52002 Expand plug 1.25"
T-86001	1" × 16" magic wrap 86001

Stock No.	Description
T-TS1275K	Spatula kit
T-28802BL	2" × 180ft duct tape 3khh7g
T-FCE12136A	Bdar case/foam/labels
T-5114158139	Sealant 2oz injector kit
T-PFCT-0150	Tube flex gas 1" × 50ft
T-PFCT-1250	Tube flex gas 1⁄2" × 50ft
T-PFCT-3450	Tube flex gas 3⁄4" × 50ft
T-4204762	Clamp repair 1⁄2" × 3" one bolt
T-4204763	Clamp repair 3⁄4" × 3" one bolt
T-AN806-10J	Plug bdar size 10 or 5⁄8"
T-AN806-12J	Plug bdar size 12 or 3⁄4"
T-AN806-4J	Plug bdar size 4 or 1⁄4"
T-AN806-6J	Plug bdar size 6 or 3⁄8"
T-AN806-8J	Plug bdar size 8 or 1⁄2"
T-AN929-10J	Cap bdar size 10 or 5⁄8"
T-AN929-12J	Cap bdar size 12 or 3⁄4"
T-AN929-4J	Cap bdar size 4 or 1⁄4"
T-AN929-6J	Cap bdar size 6 or 3/8"
T-AN929-8J	Cap bdar size 8 or 1⁄2"
T-PFCT1250-1	Tube 1⁄2" × 50ft 2ft pc
T-PFCT3450-1	Tube 3⁄4" × 50ft 2ft pc
T-PFCT0150-1	Tube 1" × 50ft 2ft pc
T-22759-4312	Wire 2ft lg ground fuel lines
T-MEANSTREAK	Marker mean streak billing

KMC18AVTK
Aircraft Maintenance Kit with Portable Chest

- Use to work on nearly any aircraft system
- Easy to carry and stow
- Case is chemical resistant, dust proof, water tight, and has a pressure equalization valve
- Ideal for flightline maintenance

Stock No.	Description	Cat 1200i Page #
106TMUA	S/flex set	24
10HR	File half round 10 in.	195
10MA	File mill 10 in.	195
110STMDY	D/hex set	19
110TMDY	D/hex set	18
196CF	Long nose w/cutter	167
211FY	D/hex set	26
211SFY	D/hex set	27
46ACP	Pliers	168
61ACP	Pliers	167
85BCP	Diag cutter	166
86CF	Diagonal cutter	166
95BCP	Pliers	167
AW1015DHK	Hex wrench set	131
AWP120	Pliers	168
DAS30	Shear set	579
DS809K	Ign wr set	118
E709BCG	4 in. cutter taper full flush	173
ECF35	Flashlight	528
F80	3⁄8 Ratchet	8
FB325A	Feeler ga	237, 564
FU8A	Univ jt	83
FXK11	Extension	74
FXK3	Extension	74
FXK6	Extension	74
GA295	Mirror	567
GA98A	File handle plastic hammer	196
HBBD8	Ball peen hammer-8 oz	187
HBPT16	16Z plastic tipped	188
HSG319	Bi mold soft grip hacksaw	190
IKCFM0000046	Foam set	NA
KMC18062NBK	18 in. all-wthr box 8drwr black	370
OEX10B	5⁄16 Flkdr combo wrench	109
OEX11B	11⁄32 Flkdr combo wrench	109
OEX8B	1⁄4 Flkdr combo wrench	109
OXI7B	Wrench	111
PPC103A	Punch	184
PPC104A	Pin punch	184
PPC105A	Pin punch	184
PPC106A	Pin punch	184
PPC107A	Pin punch	184
PPC108A	Punch	184
PPC110A	Punch	184
PPC3A	Punch	184
PT5C	Tel 2lb pick up tool chrome	568
RULER600	6 In eng rule	566
RWTP6	6 in. revrsble sfty wire pliers	245
SDDD41	Snap on 4 in 1	147
SDM213B	Flat bit	156
SDM222IRB	No. 2 Phillips bit	156
SGDMRC11A	Stubby screwdriver	149
SQUARECOMB12	Blue point combo square	566
T72	72 Tooth std handle	7
TMU8B	Universal joint	81
TMXK2	Extension	72
TMXK4	Extension	72
TMXK60	Extension	72
VS807B	Wrench set.	119
YA337A	File care brush	196
YA339	Scribe	160
YA537	Pkt mgnfier	534

KMC18AVTK

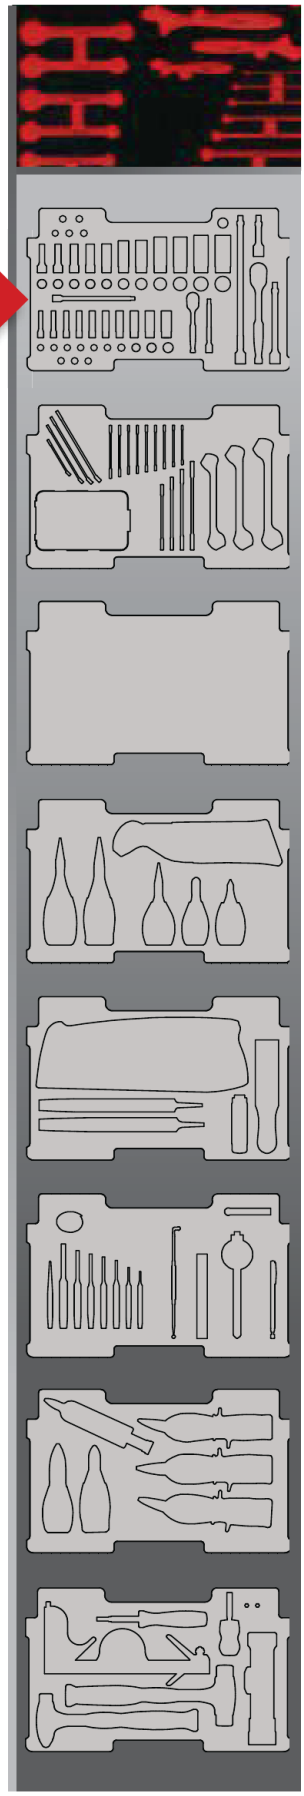

AVIATION TOOL SETS

Aircraft Maintenance Kit with Portable Chest

Complete Set: **KMC18AVTK**

- Use to work on nearly any aircraft system.
- Easy to carry and stow.
- Case is chemical resistant, dust proof, water tight, and has a pressure equalization valve.
- Ideal for flightline maintenance.
- Exceeds U.S. Air Force operating instructions.

KMC18AVTK

Basic Flightline Kit with Tote Bag

Complete Set: **ATKBFL**

- A basic kit to do a wide variety of aircraft light maintenance.
- Ideal for a fly away/on board service kit

ATKBFL

Intermediate Flightline or Hanger

Complete Set includes tools, foam, and storage: **ATKIFLB**
Tools Only: **ATKIFL**
Black over Yellow Foam: **FOAMIFL**
Tool Storage: **KRA2007FPBO**

- Ideal for A & B checks

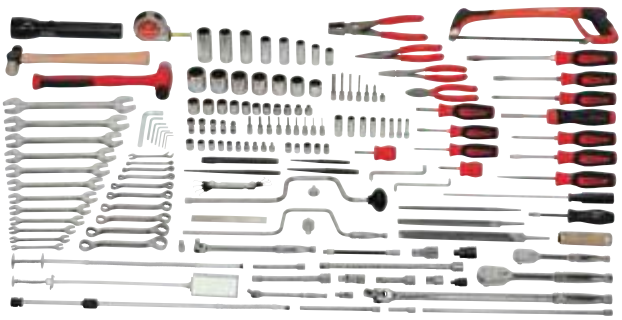

ATKIFL

Master Flightline or Hanger

Complete Set includes tools, foam, and storage: **ATKMFLB**
Tools Only: **ATKMFL**
Black over Yellow Foam: **FOAMMFL**
Tool Storage: **KRL722BPBO**

- Covers a wide variety of maintenance activities with room for customization

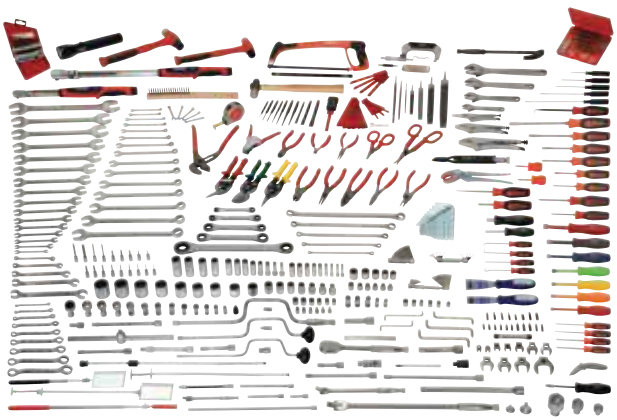

ATKMFL

Commercial Aviation Tool Sets

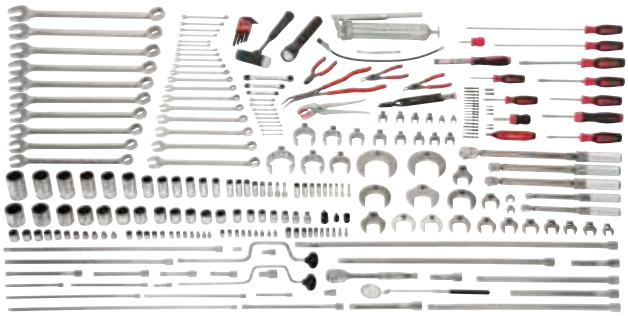

ATKAPM

All Purpose Mechanic

Complete Set includes tools, foam, and storage: **ATKAPMB**
Tools Only: **ATKAPM**
Black over Yellow Foam: **FOAMAPM**
Tool Storage: **KRA2411PBO**

- Supports a large range of maintenance requirements with additional space to support the addition of our Master Mechanic Add On set below or customize to your specific needs

ATKMMAO

Master Mechanic Add On

Tools and Foam Set to be added to ATKAPMB: **ATKMMAOFOAM**
Tools Only: **ATKMMAO**
Black over Yellow Foam: **FOAMMMAO**
Tool Storage: Not applicable, designed to be added to **ATKAPMB** above

- Expands your capabilities of the ATKAPMB above to cover a wider range of maintenance requirements.

ATKAO

Aircraft Overhaul

Complete Set includes tools, foam, and storage: **ATKAOB**
Tools Only: **ATKAO**
Black over Yellow Foam: **FOAMAO**
Tool Storage: **KRA4107FPBO**

- Designed to cover a wide range of heavy maintenance overhaul requirements

AVIATION TOOL SETS

Engine Overhaul

Complete Set includes tools, foam, and storage: **ATKEOB**
Tools Only: **ATKEO**
Black over Yellow Foam: **FOAMEO**
Tool Storage: **KRA4107FPBO**

- Comprehensive selection to cover powerplant maintenance & overhaul

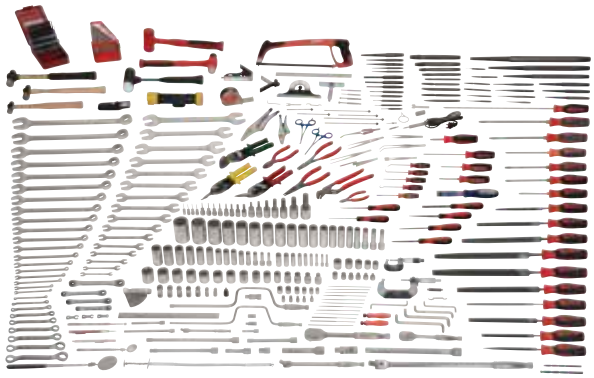

ATKEO

Avionics with Tote Bag

Complete Set: **ATKAV**

- Portable kit with a selection of tools to support a wide range of electrical or avionics maintenance and repairs

ATKAV

Sheet Metal

Tools Only: **ATKBSM**
Recommended Tool Storage: **KRSC33PBO**

- Selection supports drilling, sheet holding, riveting, cutting, and more. The optional cart is ideal to store and organize your sheet metal tools.

ATKBSM

KMC18AVTK

Stock No.	Description	Page
106TMUA	S/FLEX SET	114
10HR	FILE HALF ROUND 10IN	363
10MA	FILE MILL 10IN	363
110STMDY	D/HEX SET	111
110TMDY	D/HEX SET	110
196CF	LONG NOSE W/CUTTER	336
211FY	D/HEX SET	146
211SFY	D/HEX SET	148
46ACP	PLIERS	337
61ACP	PLIERS	336
85CF	DIAG CUTTER	335
86CF	DIAGONAL CUTTER	335
95CF	PLIERS	336
AW1015DHK	HEX WRENCH SET	270
AWP120	PLIERS	337
DAS30	SHEAR SET	698
DS809K	IGN WR SET	255
E709BCG	4IN CUTTER TAPER FULL FLUSH	342
ECF35	FLASHLIGHT	
F80	3/8 RATCHET	138
FB325A	FEELER GA	411
FU8A	UNIV JT	145
FXK11	EXTENSION	143
FXK3	EXTENSION	143
FXK6	EXTENSION	143
GA295	MIRROR	685
GA98A	FILE HANDLE PLASTIC HAMMER	364
HBBD8	BALL PEEN HAMMER-8 OZ	354
HBPT16	16Z PLASTIC TIPPED	355
HSG319	BI MOLD SOFT GRIP HACKSAW	358
IKCFM0000046	FOAM SET	
KMC18062NBK	18IN ALL-WTHR BOX 8DRWR BLACK	62
OEX10B	5/16 FLKDR COMBO WRENCH	244
OEX11B	11/32 FLKDR COMBO WRENCH	244
OEX8B	1/4 FLKDR COMBO WRENCH	244
OXI7B	WRENCH	248
PPC103A	PUNCH	351
PPC104A	PIN PUNCH	351
PPC105A	PIN PUNCH	351
PPC106A	PIN PUNCH	351
PPC107A	PIN PUNCH	351
PPC108A	PUNCH	351
PPC110A	PUNCH	351
PPC3A	PUNCH	351
PT5C	TEL 2LB PICK UP TOOL CHROME	684
RULER600	6 IN ENG RULE	682
RWTP6	6IN REVRSBLE SFTY WIRE PLIERS	423
SDDD41	SNAP ON 4 IN 1	311
SDM213B	FLAT BIT	314
SDM222IRB	NO. 2 PHILLIPS BIT	314
SGDMRC11A	STUBBY SCREWDRIVER	314
SQUARECOMB12	BLUE POINT COMBO SQUARE	681
T72	72 TOOTH STD HANDLE	103
TMU8B	UNIVERSAL JOINT	109
TMXK2	EXTENSION	108
TMXK4	EXTENSION	108
TMXK60	EXTENSION	108
VS807B	WRENCH SET.	256
YA337A	FILE CARE BRUSH	364
YA339	SCRIBE	329
YA537	PKT MGNFIER	643

ATKBFL

Stock No.	Description	Page
120SSDP	OFFSET SD PH1 X PH2	311
20SSD	OFFSET SD .050 X 5/16	311
49CF	SLIP JOINT PLIERS	337
95CF	PLIERS	336
AW1015DK	.050 IN HEX KEY	270
BP12B	HAMMER	356
ECF201A	3 WATT LED 2D CELL FLASHLIGHT	
F80FOD	HSSFODRAT	141
FB302A	FEELER GA	680
FDS101	3/8IN DR 12PT CHROME 5/16IN	147
FDS121	3/8IN DR 12PT CHROME 3/8IN	147
FDS141	3/8IN DR 12PT CHROME 7/16IN	147
FDS161	3/8IN DR 12PT CHROME 1/2IN	147
FDS181	3/8IN DR 12PT CHROME 9/16IN	147
FU12B	FLEXOCKET	149
FU14B	FLEXOCKET	149
FU8A	UNIV JT	145
GA53A	HINGED MIRROR	685
HBPT16	16Z PLASTIC TIPPED HAMMER	355
PPC106A	PIN PUNCH	351
PPC710BK	PUNCH/CHISEL SET/KIT BAG	351
RULER600	6 IN ENG RULE	682
RWTP9	9IN REVSBLE SFTY WIRE PLIERS	423
SG5ASABR	INSTINCT AWL	328
SGCP1BR	INSTINCT COTTER PIN PULLER	588
SGMRC44B	SOFT GR SD	
SS5A	SCR START	317
STMD10	SOCKET	111
STMD11	SOCKET	111
STMD12	SOCKET	111
STMD14	SOCKET	111
STMD16	SOCKET	111
STMD18	SOCKET	111
STMD6	SOCKET	111
STMD7	SOCKET	111
STMD8	SOCKET	111
STMD9	SOCKET	111
T72FOD	HSSFODRAT	105
TB40	TOTE BAG 17X9X11	407
TM61A	FLEXTENSION	108
TMU8B	UNIVERSAL JOINT	109
TMXK140	EXTENSION	108
TMXK2	EXTENSION	108
TMXK4	EXTENSION	108
TPMA12FP	12FT FOD TAPE	N70
VO1214B	WRENCH	254
VO1618B	WRENCH	254
VO810B	WRENCH	254
XDH1214A	BOXOCKET	252
XDH1618A	BOXOCKET	252
XDH810B	BOXOCKET	252

ATKIFL

Stock No.	Description	Page
10MA	FILE MILL 10IN	363
120SSDP	OFFSET SD PH1 X PH2	311
120SSDP	OFFSET SD PH1 X PH2	311
196CF	LONG NOSE W/CUTTER	336
20SSD	OFFSET SD .050 X 5/16	311
49CF	SLIP JOINT PLIERS	337
61ACP	PLIERS	336
86CF	DIAGONAL CUTTER	335
8HR	FILE HALF ROUND 8IN	363
8R	FILE ROUND 8IN	363
A2A	ADAPTOR	144
AW050D	.050 IN HEX KEY	270
AW12D	3/8 IN HEX KEY	270
AW2-1/2D	5/64 IN HEX KEY	270
AW2D	1/16 IN HEX KEY	270
AW3D	3/32 IN HEX KEY	270
AW4D	1/8 IN HEX KEY	270
AW5D	5/32 IN HEX KEY	270
AW6D	3/16 IN HEX KEY	270
BP12B	HAMMER	356
DS2224A	IGN WR	255
ECF201A	3 WATT LED 2D CELL FLASHLIGHT	
F081	SOCKET....	146
F101	SOCKET...	146
F10LC	BREAK BAR	142
F121	SOCKET	146
F141	SOCKET	146
F161	SOCKET	146
F181	SOCKET	146
F201	SOCKET	146
F221	SOCKET	146
F241	SOCKET	146
F261	SOCKET	146
F281	SOCKET	146
F4LBK	3/8 IN DR. SPEEDER	143
F80FOD	HSSFODRAT	141
FB302A	FEELER GA	680
FU8A	UNIV JT	145
FXK11	EXTENSION	143
FXK3	EXTENSION	143
FXK6	EXTENSION	143
GA265A	MECH FNGR	683
GA53A	HINGED MIRROR	685
GA98A	FILE HANDLE PLASTIC	364
GFAT1E	ADAPTOR	109
GSAF1F	ADAPTOR	144
HBPT16	16Z PLASTIC TIPPED HAMMER	355
HSG319	BI MOLD SOFT GRIP HACKSAW	358
KRA2007FPBO	7 DRAWER RC RED	52
KRA21G	SM BOX 20.75IN 2DR LID TRAY	70
PPC3A	PUNCH	351
PPC4A	PUNCH	351
PPC820B	CHISEL	351
PPC905B	PUNCH	352
RULER600	6 IN ENG RULE	682
S261	SOCKET	192
S281	SOCKET	192
S321	SOCKET	192
S80AFOD	HSSFODRAT	186
SF201	SOCKET	148
SF221	SOCKET	148
SF241	SOCKET	148
SG5ASABR	INSTINCT AWL	328
SG5ASABR	INSTINCT AWL	328
SGD4BR	SOFT GR SD	305

AVIATION TOOL SETS CONTENTS

ATKIFL

Stock No.	Description	Page
SGDP31IRBR	SOFT GR PHILLIPS	306
SGDP63IRBR	SOFT GR PHILLIPS	306
SGT4BR	SOFTGRIP 1/4IN DRIVER	106
SHD1R	RED STUBBY	305
SHD1R	RED STUBBY	305
SHDP42IRR	HARD GR PHILLIPS	307
SN18B	BREAKER BAR	187
SS5A	SCR START	317
SSDE610C	ELEC SD 3/16IN X 10IN FLAT	308
STMD10	SOCKET	111
STMD11	SOCKET	111
STMD12	SOCKET	111
STMD14	SOCKET	111
STMD16	SOCKET	111
STMD18	SOCKET	111
STMD6	SOCKET	111
STMD7	SOCKET	111
STMD8	SOCKET	111
STMD9	SOCKET	111
SW301	SOCKET	191
SW321	SOCKET	191
SW341	SOCKET	191
SW361	SOCKET	191
SW381	SOCKET	191
SW401	SOCKET	191
SX2	EXTENSION	189
T72FOD	HSSFODRAT	105
TA3	ADAPTOR	109
TM04	SOCKET	110
TM05	SOCKET	110
TM10G	BREAK BAR	106
TM408	SOCKET	116
TM410	SOCKET	116
TM412	SOCKET	116
TM5	SLIDE BAR	107
TM61A	FLEXTENSION	108
TM62B	FLEX DRIV	107
TM65	ADJ TOOL	549
TM77	RAT ADAPT	106
TM82	SCR DRIV	120
TM83A	SCR DRIV	549
TM84	SCR DRIV	549
TMA2.5E	HEX DRIVER	120
TMA3.5E	HEX DRIVER	120
TMA3E	HEX HEAD DR	120
TMA4.5E	HEX DRIVER	120
TMA4E	HEX DRIVER	120
TMA5E	HEX DRIVER	120
TMA6E	HEX DRIVER	120
TMA7E	HEX DRIVER	120
TMA8E	HEX DRIVER	120
TMC104E	FLAT TIP DR	120
TMC105E	FLAT TIP DR	120
TMC106E	FLAT TIP DR	120
TMD10	SOCKET	110
TMD11	SOCKET	110
TMD12	SOCKET	110
TMD14	SOCKET	110
TMD16	SOCKET	110
TMD18	SOCKET	110
TMD6	SOCKET	110
TMD7	SOCKET	110
TMD8	SOCKET	110
TMD9	SOCKET	110
TMP12E	PHILLIPS DR	121
TMP22E	PHILLIPS DR	121
TMP23E	PHILLIPS DR	121
TMS4E	SPEEDER	107
TMS70A	SPINNER	106
TMU101A	FLEXOCKET	114
TMU121A	FLEXOCKET	114
TMU141A	FLEXOCKET	114
TMU161A	FLEXOCKET	114
TMU81B	FLEXOCKET	114
TMU8B	UNIVERSAL JOINT	109
TMXK140	EXTENSION	108
TMXK2	EXTENSION	108
TMXK4	EXTENSION	108
TMXK60	EXTENSION	108
TPMA12FP	12FT FOD TAPE	N070
VO1012B	WRENCH	254
VO1214B	WRENCH	254
VO1416B	WRENCH	254
VO1618B	WRENCH	254
VO1820B	WRENCH	254
VO2022B	WRENCH	254
VO2224B	WRENCH	254
VO2426B	WRENCH	254
VO2628B	WRENCH	254
VO2830B	WRENCH	254
VO3032B	WRENCH	254
VO810B	WRENCH	254
XS1012A	BOXOCKET	250
XS1214A	BOXOCKET	250
XS1416A	BOXOCKET	250
XS1618A	BOXOCKET	250
XS1820A	BOXOCKET	250
XS2024A	BOXOCKET	250
XS2226A	BOXSOCKET	250
XS67A	BOXOCKET	250
XS810A	BOXOCKET	250

ATKMFL

Stock No.	Description	Page
106TMCO	OPEN END SET	258
10MA	FILE MILL 10IN	363
10R	FILE ROUND 10IN	363
10SSD	OFFSET SD .040 X 1/4	311
120SSDP	OFFSET SD PH1 X PH2	311
12MA	FILE MILL 12IN	363
12R	FILE ROUND 12IN	363
137CF	HIGH LEVERAGE COMBO PLIERS	337
184CF	DIAG CUTTER	335
196CF	LONG NOSE W/CUTTER	336
206AFX	EXTENSION ST	143
20SSD	OFFSET SD .050 X 5/16	311
211FY	D/HEX SET	146
211SFY	D/HEX SET	148
30SSD	OFFSET SD .060 X 3/8	311
340SSDP	OFFSET SD PH3 X PH4	311
47CF	COMBO PLIERS	337
61ACP	PLIERS	336
6MA	FILE MILL 6IN	363
6R	FILE ROUND 6IN	363
86CF	DIAGONAL CUTTER	335
87ACF	DIAGONAL CUTTER	335
8MA	FILE MILL 8IN	363
8R	FILE ROUND 8IN	363
95CF	PLIERS	336
AC58E	3X19 ROW CURVED SCRATCH CS	738
AD704A	4PC ADJ WRENCH SET	272
ATI508K	CANNON PLUG PLIER	N111
AW1020DK	HEX WRENCH SET	270
AWP120	PLIERS	337
BP16B	HAMMER	356
CD10A	TIN SNIP	698
CD7A	TIN SNIP	698
CRA180PB	BIT SET	
AVSL10	SHEARS	698
AVSR10	SHEARS	698
AVSS10	SHEARS	698
DB113C	BIT SET 13 PC HSS	491
E1020	EXTR SET 64785	383
E709BCG	4IN CUTTER TAPER FULL FLUSH	342
ECF201A	3 WATT LED 2D CELL FLASHLIGHT	
F111	SOCKET	146
F40B	HANDLE	143
F4LBK	3/8 IN DR. SPEEDER	143
F77	RAT ADAPT	142
F80FOD	HSSFODRAT	141
FB302A	FEELER GA	680
FB325A	FEELER GA	411
FB326B	FEELER GA	679
FC40A	CROWFOOT	259
FCO12A	CROWFOOT	259
FCO14A	CROWFOOT	259
FCO16A	CROWFOOT	259
FCO18A	CROWFOOT	259
FCO20A	CROWFOOT	259
FCO22A	CROWFOOT	259
FCO24A	CROWFOOT	259
FCO28A	CROWFOOT 7/8" 3/8"SQ DR.	259
FRS70A	SPINNER	142
FU10B	FLEXOCKET	149
FU14B	FLEXOCKET	149
FU16B	FLEXOCKET	149
FU18B	FLEXOCKET	149
FU20B	FLEXOCKET	149
FU22B	FLEXOCKET	149
FU24B	FLEXOCKET	149
FU26B	FLEXOCKET	149
FU28B	FLEXOCKET	149
FU30A	FLEXOCKET	149
FXKL6A	3/8IN LOCKING EXTENSION	143

ATKMFL Cont.

Stock No.	Description	Page
GA265A	MECH FNGR	683
GA294	MIRROR	685
GA53A	HINGED MIRROR	685
GA98A	FILE HANDLE PLASTIC	364
GFAT1E	ADAPTOR	109
GSAF1F	ADAPTOR	144
HBPT16	16Z PLASTIC TIPPED HAMMER	355
HBPT24	24OZ PLASTIC TIPPED HAMMER	355
HSBM1232B	HACKSAW BLADES 10/PK	358
HSG319	BI MOLD SOFT GRIP HACKSAW	358
KER1600SO	CHIVE KNIFE	
KRL722BPBO	2BK RC W 2 FW DRWS RED	29
LP10R	10IN STRAIGHT JAW LKING PLIERS	338
LP6LN	6IN LONG NOSE LOCKING PLIER	338
LP7R	7IN STRAIGHT JAW LKING PLIERS	338
MIC4B	3 - 4IN MECH DIG MICROMETER	674
NDD900B	NUT DR SET	318
NYZ7007HD	MASTIC REMOVAL HAND KIT....	424
OEX711B	WR SET	244
OXI10SB	WRENCH	248
OXI6SB	WRENCH	248
OXI7SB	WRENCH	248
OXI8SB	WRENCH	248
OXI9SB	WRENCH	248
PBMP16A	16 IN MULTI POSITION PRYBAR	331
PK50A	SCRAPER	366
PK52A	SCRAPER	366
PPC710BK	PUNCH/CHISEL SET/ KIT BAG	351
PT28E	MAGNETIC PICK-UP TOOL.	684
PWC27	WIRE STRIPPR	344
PWC52A	JAW PLIERS	344
R1214C	RATCHET WRENCH 3/8 X 7/16 IN	239
R1618C	RATCHET WRENCH 1/2X9/16IN	239
R2022C	RATCHET WRENCH 5/8 X 11/16IN	239
R2426C	RATCHET WRENCH 3/4X13/16IN	239
R2830C	RATCHET WRENCH 7/8X15/16IN	239
R810C	RATCHET WRENCH 1/4INX5/16IN	239
RULER600	6 IN ENG RULE	682
RWTP9	9IN REVSBLE SFTY WIRE PLIERS	423
RXFS605B	WRENCH SET.	257
S12L	SLIDE BAR	188
S4	SPEEDER	188
S77A	1/2IN RATCHETING ADAPTOR.	187
S8	UNIV JT	190
S80AFOD	HSSFODRAT	186
SG5ASABR	INSTINCT AWL	328
SGASA204AO	SOFT GRIP MINI PICK SET	328
SGCP1BR	INSTINCT COTTER PIN PULLER	588
SGD153BR	MARINE PLUG SCREWDRIVER	313
SGT4BR	SOFTGRIP 1/4IN DRIVER	106
SHDX40O	4PC ORG HARD GRIP SCRDRVR SET	304
SHDX80O	ORANGE 8PC HARD GRIP SCRDR SET	304
SHDZ31R	NUM 1 3IN EXO POSI SD	313
SHDZ42R	NUM 2 4IN EXP POSI SD	313
SN18B	BREAKER BAR	187
SRPC7000	RING PLIERS	599
SS5A	SCR START	317
SSDE42C	ELEC SD 1/8IN X 2IN FLAT	308
SSDE43C	ELEC SD 1/8IN X 3IN FLAT	308
SSDE44C	ELEC SD 1/8IN X 4IN FLAT	308
SSDE46C	ELEC SD 1/8IN X 6IN FLAT	308
SSDE48C	ELEC SD 1/8IN X 8IN FLAT	308
STMD10	SOCKET	111
STMD11	SOCKET	111
STMD12	SOCKET	111
STMD14	SOCKET	111
STMD18	SOCKET	111
STMD6	SOCKET	111
STMD7	SOCKET	111
STMD8	SOCKET	111
STMD9	SOCKET	111
SW121A	SOCKET	191
SW141A	SOCKET	191
SW161A	SOCKET	191
SW181A	SOCKET	191
SW201	SOCKET	191
SW221	SOCKET	191
SW241	SOCKET	191
SW261	SOCKET	191
SW281	SOCKET	191
SW301	SOCKET	191
SW321	SOCKET	191
SW341	SOCKET	191
SW361	SOCKET	191
SW381	SOCKET	191
SW401	SOCKET	191
SW421	SOCKET	191
SXK11	EXTENSION	189
SXK3	EXTENSION	189
SXK5	EXTENSION	189
T72FOD	HSSFODRAT	105
TA3	ADAPTOR	109
TECH2R100	FIXED 3/8IN HEAD TECHWRENCH	278
TECH3R250	FIXED 1/2IN HEAD TECHWRENCH	278
TM04	SOCKET	110
TM05	SOCKET	110
TM10G	BREAK BAR	106
TM27E	CLUTCH SOCKET	121
TM30E	CLUTCH SOCKET	121
TM31E	CLUTCH SOCKET	121
TM408	SOCKET	116
TM410	SOCKET	116
TM412	SOCKET	116
TM4CSA	1/4IN SHANK DRIVER	106
TM5	SLIDE BAR	107
TM61A	FLEXTENSION	108
TM62B	FLEX DRIV	107
TM65	ADJ TOOL	549
TM77	RAT ADAPT	106
TM82	SCR DRIV	120
TM83A	SCR DRIV	549
TM84	SCR DRIV	549
TMA2.5E	HEX DRIVER	120
TMA3.5E	HEX DRIVER	120
TMA3E	HEX HEAD DR	120
TMA4.5E	HEX DRIVER	120
TMA4E	HEX DRIVER	120
TMA5E	HEX DRIVER	120
TMA6E	HEX DRIVER	120
TMA7E	HEX DRIVER	120
TMA8E	HEX DRIVER	120
TMC104E	FLAT TIP DR	120
TMC105E	FLAT TIP DR	120
TMC106E	FLAT TIP DR	120
TMD10	SOCKET	110
TMD11	SOCKET	110
TMD12	SOCKET	110
TMD14	SOCKET	110
TMD16	SOCKET	110
TMD18	SOCKET	110
TMD6	SOCKET	110
TMD7	SOCKET	110
TMD8	SOCKET	110
TMD9	SOCKET	110
TMP12E	PHILLIPS DR	121
TMP22E	PHILLIPS DR	121
TMP23E	PHILLIPS DR	121
TMS4EK	1/4IN SPEEDER	107
TMS70A	SPINNER	106
TMU121A	FLEXOCKET	114
TMU141A	FLEXOCKET	114
TMU161A	FLEXOCKET	114
TMU181A	FLEXOCKET	114
TMU81B	FLEXOCKET	114
TMU8B	UNIVERSAL JOINT	109
TMXK140	EXTENSION	108
TMXK2	EXTENSION	108
TMXK4	EXTENSION	108
TMXK60	EXTENSION	108
TPMA12FP	12FT FOD TAPE	N070
VO1012B	WRENCH	254
VO1214B	WRENCH	254
VO1416B	WRENCH	254
VO1618B	WRENCH	254
VO1820B	WRENCH	254
VO2022B	WRENCH	254
VO2224B	WRENCH	254
VO2426B	WRENCH	254
VO2628B	WRENCH	254
VO2830B	WRENCH	254
VO3032B	WRENCH	254
VO3234B	WRENCH	254
VO3638B	WRENCH	254
VO4042B	WRENCH	254
VO810B	WRENCH	254
XDH605	WRENCH SET	252
XS609A	WR SET	250

AVIATION TOOL SETS CONTENTS

ATKAPM

Stock No.	Description	Page
106BTMX	EXT SET	108
110TMDSY	SOCKET SET	110
110TMDY	1/4IN DR 10PC 12PT SAE SKT SET	110
208AFX	EXT SET	143
208AN	CR-FT SET	260
211FY	3/8IN DR 11PC 12PT SHALL SAE S	146
214SFY	SOCKET SET	148
305ASX	EXT SET.	189
313SWYA	D/HEX SET	191
313SYA	D/HEX SET	192
415CP	STK PLIERS	336
86CF	DIAGONAL CUTTER	335
A2A	ADAPTOR	144
AN850820B	1 1/4 IN 1/2 DRV CROWFOOT	262
AN850824B	1 1/2 IN 1/2 DRV CROWFOOT	262
AN850824B	1 1/2 IN 1/2 DRV CROWFOOT	262
AN850829B	1 13/16 IN 1/2 IN DRV CROWFOOT	262
AN850832B	2 IN 1/2 IN DRV CROWFOOT	262
AN850835B	2 3/16 IN 1/2 IN DRV CROWFOOT	262
AN850836B	2 1/4 IN 1/2 IN DRV CROWFOOT	262
AN850844B	2 3/4 IN 1/2 IN DRV CROWFOOT	262
AN85088B	1/2 IN 1/4 DRV CROWFOOT	258
AN85089B	9/16 IN 1/4 DRV CROWFOOT	258
ATI508K	CANNON PLUG PLIERS	N111
BH232A	HAMMER	355
BHS13A	BLX13 SET	269
ECF201A	LIGHT	
F111	SOCKET	146
F301	SOCKET	146
F321	SOCKET	146
F4LBK	3/8 IN DR. SPEEDER	143
F80FOD	3/8IN DR FOD RATCHET	141
FC36A	CROWFOOT 1 1/8"	259
FC40A	CROWFOOT	259
FC42A	CROWFOOT	259
FC48A	CROWFOOT	259
FC50A	CROWFOOT	259
FC58A	CROWFOOT	259
FC64A	CROWFOOT	259
FC72A	CROWFOOT	259
FC88A	CROWFOOT	259
FC92A	CROWFOOT	259
FCO20A	CROWFOOT	259
FCO22A	CROWFOOT	259
FCO24A	CROWFOOT	259
FCO28A	CROWFOOT 7/8" 3/8"SQ DR.	259
FCO32A	CROWFOOT	259
GA295	MIRROR	685
GF191	SOCKET	146
GFAT1E	ADAPTOR	109
KRA2411PBO	11-DRW 54 X 24 RC RED	46
OEX724K	24PC COMBO WR SET 1/4 TO 1-5/8	244
OEX8B	1/4 FLKDR COMBO WRENCH	244
OXI4SB	WRENCH	248
OXI5SB	WRENCH	248
OXI6B	WRENCH	248
OXI7B	WRENCH	248
PA4E	POWER ADAPTER	168
PKNC125C2	1-1/4IN 2 BLDE STRIKING SCRAPR	365
PWC52A	JAW PLIERS	344
QD1200	40-200-IN LB TORQ	279
QD1R200	40-200 IN LB TORQ.	279
QD21000	200-1000 IN LB TORQ	279
QD2R1000	TORQ WRNCH 3/8DR 200-1000IN LB	279
QD32500	500-2500 IN LB TORQ	279
QD3R2500	500-2500 IN LB TORQ	279

Stock No.	Description	Page
QDRIVER4P	4-40 IN.LB. TORQ SCREWDRIVER	285
R1011C	RATCHET WRENCH 5/16INX11/32IN	239
R1214C	RATCHET WRENCH 3/8 X 7/16 IN	239
R1618C	RATCHET WRENCH 1/2X9/16IN	239
R810C	RATCHET WRENCH 1/4INX5/16IN	239
RWTP9	9IN REVSBLE SFTY WIRE PLIERS	423
S381	SOCKET	192
S401	SOCKET	192
S421	SOCKET	192
S441	SOCKET	192
S461	SOCKET	192
S481	SOCKET	192
S80AFOD	1/2IN DR FOD RATCHET	186
SCO40	CROWFOOT	262
SCO48	1 1/2" CROWSFOOT 1/2" DR.	262
SCO64	CROWFOOT	262
SDM312B	SLOTTED BIT	326
SDM315A	SLOTTED BIT	326
SDM319A	SLOTTED BIT	326
SDM320A	PHILLPS BIT	326
SDM321B	PHILLIPS BIT	326
SDM322B	PHILLIPS BIT	326
SDM323A	POWER BIT	326
SDM3704	HEX BIT	327
SDM3705	HEX BIT	327
SDM3706	HEX BIT	327
SDM3707	HEX BIT	327
SDM3708	HEX BIT	327
SDM3709	HEX BIT	327
SDM3710	HEX BIT	327
SDM3712	HEX BIT	327
SDM3714	HEX BIT	327
SDM3716	HEX BIT	327
SF191	SOCKET	148
SGD2BR	SOFT GR SD	305
SGD4BR	SOFT GR SD	305
SGD6BR	SOFT GR SD	305
SGD8BR	8INCHFLAT	305
SGDMRC11A	STUBBY SCREWDRIVER	314
SGDMRC44B	SG RATCHETING.	314
SGDP122BR	SOFT GRIP PHILLIPS CABNT DRIVR	306
SGDP162BR	SOFT GRIP PHILLIPS CABNT DRIVR	306
SGDP31IRBR	SOFT GR PHILLIPS	306
SGDP42IRBR	SOFT GR PHILLIPS	306
SHD1R	RED STUBBY	305
SHDP22IR*	NO.2 GREEN STUBBY	307
SOEXM10	10MM FLKDR PLUS COMBO WRENCH	241
SOEXM7	FLANK DR PLUS COMBO 7MM	241
SOEXM8	8MM FLKDR PLUS COMBO WRENCH	241
SOEXM9	9MM FLKDR PLUS COMBO WRENCH	241
SRPC3845	SNP RNG PLIER 45DEG.	339
SRPC3890	SNP RNG PLIER 90DEG	339
SW381	SOCKET	191
SW401	SOCKET	191
SW421	SOCKET	191
SW441	SOCKET	191
SW461	SOCKET	191
SW481	SOCKET	191
SX15	EXTENSION	189
SX20	EXTENSION	189
SX24	EXTENSION	189
SX36	EXTENSION	189
T72FOD	1/4IN DR FOD RATCHET	105
TA3	ADAPTOR	109
TMCO16	1/4D CROWFOOT	258
TMCO18	9/16" CROWSFOOT 1/4" DR.	258

Stock No.	Description	Page
TMM4	SOCKET	110
TMM4.5	SOCKET	110
TMMD10	SOCKET	110
TMMD5	SOCKET	110
TMMD5.5	SOCKET	110
TMMD6	SOCKET	110
TMMD7	SOCKET	110
TMMD8	SOCKET	110
TMMD9	SOCKET	110
TMS4EK	1/4IN SPEEDER	107
TMX240	EXTENSION	108
TMXK140	EXTENSION	108
WER066624	BIT	N080
WER066626	BIT	N080
WER066628	BIT	N080
WER066630	BIT	N080
WER066632	BIT	N080
WER066654	BIT	N080
WER066656	BIT	N080
YA728A	GREASE GUN,LEVER	649

ATKMMAO

Stock No.	Description	Page
10MA	FILE MILL 10IN	363
10R	FILE ROUND 10IN	363
10SSD	OFFSET SD .040 X 1/4	311
120SSDP	OFFSET SD PH1 X PH2	311
120SSDP	OFFSET SD PH1 X PH2	311
12R	FILE ROUND 12IN	363
1650	PRY BAR	332
218AFP	3/8 DR SET	172
340SSDP	OFFSET SD PH3 X PH4	311
6MA	FILE MILL 6IN	363
6R	FILE ROUND 6IN	363
A2A	ADAPTOR	144
AC58E	3X19 ROW CURVED SCRATCH CS	738
ATI508K	CANNON PLUG PLIERS	N111
AW1015DK	HEX WRENCH SET	270
AWP120	PLIERS	337
CD7A	TIN SNIP	698
CX1416	BOXOCKET	253
CX1820	BOXOCKET	253
CX2024	BOXOCKET	253
CX2226	BOXOCKET	253
CX2830	BOXOCKET	253
AVSL10	REGULAR LEFT AVIATION SNIP	698
AVSR10	REGULAR RIGHT AVIATION SNIP	698
AVSS10	REGULAR STRAIGHT AVIATION SNIP	698
DB113C	BIT SET 13 PC HSS	491
E1020	EXTR SET 64785	383
F111	SOCKET	146
F77	RAT ADAPT	142
GA261B	SCREWSTART	317
GA265A	MECH FNGR	683
GA98A	FILE HANDLE PLASTIC	364
GLASSVIS	CLEAR UNCOATED LENS, BLACK TMP	731
HSBM1232B	HACKSAW BLADES 10/PK	358
HSG319	BI MOLD SOFT GRIP HACKSAW	358
KRL722BPBO	2BK RC W 2 FW DRWS RED	29
LP10LN	10IN LONG NOSE LOCKING PLIERS	338
LP6LN	6IN LONG NOSE LOCKING PLIER	338
NDD900B	NUT DRIVER SET 9PC SAE	318
NYZ7007HD	MASTIC REMOVAL HAND KIT....	424
PK50A	SCRAPER	366
PPC210BK	PUNCH/CHISEL SET/KIT BAG	351
PPVP70BK	MIDGET PUNCH AND CHISEL SET	352
PT28E	MAGNETIC PICK-UP TOOL.	684

ATKMMAO (Cont'd)

Stock No.	Description	Page
R460B	120V SOLDER KIT	560
RULER600	6 IN ENG RULE	682
SG5ASABR	INSTINCT AWL	328
SGD304BR	MINI SLOTTED SCREWDRIVER RED	305
SGT4BR	SOFTGRIP 1/4IN DRIVER	106
SHDX800	ORANGE 8PC HARD GRIP SCRDR SET	304
SN18B	BREAKER BAR	187
SRPC7000	RING PLIERS	599
TPMA12FP	FOD TAPE	N070
XB3032A	BOXOCKET	250
XB3234A	BOXOCKET	250
XB3638A	BOXOCKET	250
XB4042A	BOXOCKET	250
XDHF605	WRENCH SET	251
XS609A	WR SET	250

ATKEO

Stock No.	Description	Page
1210B	5/16 LONG TAPER PUNC	352
137CF	HIGH LEVERAGE COMBO PLIERS	337
1512B	LONG PUNCH.	352
1816B	LG PUNCH	352
184CF	HIGH LEVERAGE CUTTER	335
196CF	LONG NOSE W/CUTTER	336
218AFP	3/8 DR SET	172
388CF	HIGH LEVERAGE CUTTER	335
46CF	PLIERS COMBO SLIP JOINT 6-1/2	337
61ACP	PLIERS	336
91ACP	PLIERS	337
A2A	ADAPTOR	144
AW1015DHK	HEX WRENCH SET	270
BH232A	HAMMER	355
BP4B	HAMMER	356
BP8B	HAMMER	356
BPN12B	HAMMER	356
AVSOSL9	OFFSET LEFT AVIATION SNIP	698
AVSOSR9	OFFSET RIGHT AVIATION SNIP	698
AVSS10	REGULAR STRAIGHT AVIATION SNIP	698
DB160C	60 PC HSS WIRE SET	492
DBF1/4C	1/4 DRILL BIT	383
DBF5/16C	5/16 DRILL BIT	383
DM6	DEPTH MICROMETER	675
DM6	DEPTH MICROMETER	675
ECF35	LIGHT	
F301	SOCKET	146
F321	SOCKET	146
FA10E	HEX DRIVER	158
FA12E	HEX DRIVER	158
FA4.5E	HEX DRIVER	158
FA4E	HEX DRIVER	158
FA5E	HEX DRIVER	158
FA6E	HEX DRIVER	158
FA7E	HEX DRIVER	158
FA8E	HEX DRIVER	158
FB335	FEELER GA	679
FU10B	FLEXOCKET	149
FU12B	FLEXOCKET	149
FU14B	FLEXOCKET	149
FU16B	FLEXOCKET	149
FU18B	FLEXOCKET	149
FXWP8	WOBBLE PLUS EXT	144
GA295	MIRROR	685
GA353B	4-JAW FLEX PICKUP TOOL	683
GFAT1E	ADAPTOR	109
HBFE24	24 OZ DB HAMMER	354
HBFN120A	SWISS FILE SET	364
HBPT16	16Z PLASTIC TIPPED HAMMER	355
HSG319	BI MOLD SOFT GRIP HACKSAW	358

Stock No.	Description	Page
KRA4107FPBO	7 DRAWER RC RED	51
KTA3A	TOTE TRAY 20IN RED	69
LP10LN	10IN LONG NOSE LOCKING PLIERS	338
LP6LN	6IN LONG NOSE LOCKING PLIER	338
MIC3B	2 - 3IN MECH DIG MICROMETER	674
MICB1B	0 - 1IN OUTSIDE MIC	674
MNH1002	MAGNIFIER	RWD
MPC7A	7IN BENT NOSE MINI PLIERS	561
MPS7A	7IN STRAIGHT MINI PLIERS	561
MROUND4	4 PC SMALL HOLE GAGE SET	675
OEX080B	1/4IN WRENCH	247
OEX090B	WRENCH	247
OEX10B	5/16 FLKDR COMBO WRENCH	244
OEX11B	11/32 FLKDR COMBO WRENCH	244
OEX12B	3/8 FLKDR COMBO WRENCH.	244
OEX14B	7/16 FLKDR COMBO WRENCH	244
OEX16B	1/2 FLKDR COMBO WRENCH	244
OEX18B	9/16 FLKDR COMBO WRENCH	244
OEX20B	5/8 FLKDR COMBO WRENCH	244
OEX22B	11/16 FLKDR COMBO WRENCH	244
OEX24B	3/4 FLKDR COMBO WRENCH	244
OEX26B	13/16 FLKDR COMBO WRENCH	244
OEX28B	7/8 FLKDR COMBO WRENCH	244
OEX30B	15/16 FLKDR COMBO WRENCH	244
OEX32B	1IN FLKDR COMBO WRENCH	244
OEX34B	1-1/16 FLKDR COMBO WRENCH	244
OEX36B	1-1/8 FLKDR COMBO WRENCH	244
OEX38B	1-3/16 FLKDR COMBO WRENCH	244
OEX40B	1-1/4 FLKDR COMBO WRENCH	244
PK52A	SCRAPER	366
CNT6521	6IN DIVIDERS	RWD
PPC250BK	PUNCH/CHISEL SET/ KIT BAG	351
PPC3A	PUNCH	351
PPC404A	PUNCH	352
PPC4A	PUNCH	351
PPC6B	PUNCH	351
PPVP70BK	MIDGET PUNCH AND CHISEL SET	352
PT5C	TEL 2LB PICK UP TOOL CHROME	684
PTM143	INSPECTION MIRROR	685
PTS5	SCRIBER	684
R1011C	RATCHET WRENCH 5/16INX11/32IN	239
R1012C	RATCHET WRENCH 5/16INX3/8IN	239
R1214C	RATCHET WRENCH 3/8 X 7/16 IN	239
R1618C	RATCHET WRENCH 1/2X9/16IN	239
R40B	40 WATT SOLDERING IRON KIT	560
R810C	RATCHET WRENCH 1/4INX5/16IN	239
RULER120	12 IN. RULE	682
S121A	SOCKET	192
S141A	SOCKET	192
S161A	SOCKET	192
S181A	SOCKET	192
S201	SOCKET	192
S221	SOCKET	192
S241	SOCKET	192
S261	SOCKET	192
S281	SOCKET	192
S301	SOCKET	192
S321	SOCKET	192

Stock No.	Description	Page
S341	SOCKET	192
S361	SOCKET	192
S381	SOCKET	192
S401	SOCKET	192
S421	SOCKET	192
S441	SOCKET	192
S461	SOCKET	192
S481	SOCKET	192
S8	UNIV JT	190
S80AFOD	1/2IN DR FOD RATCHET	186
SA10E	HEX DRIVER	196
SA12E	HEX DRIVER	196
SA14E	HEX DRIVER	196
SA16E	HEX DRIVER	196
SA18E	HEX DRIVER	196
SA20E	HEX DRIVER	196
SA24E	HEX DRIVER	196
SF081	SOCKET	148
SF101	SOCKET	148
SF121	SOCKET	148
SF141	SOCKET	148
SF161	SOCKET	148
SF181	SOCKET	148
SF191	SOCKET	148
SF201	SOCKET	148
SF221	SOCKET	148
SF241	SOCKET	148
SF261	SOCKET	148
SF281	SOCKET	148
SF301	SOCKET	148
SF321	SOCKET	148
SG5ASABR	INSTINCT AWL	328
SG5ASABR	INSTINCT AWL	328
SGASA204A	SOFT GRIP MINI PICK SET	328
SGD146BR	SOFT GRIP INSTINCT SLOTTED DRV	305
SGD2BR	SOFT GR SD	305
SGDP162BR	SOFT GRIP PHILLIPS CABNT DRIVR	306
SGDP31IRBR	SOFT GR PHILLIPS	306
SGDP63IRBR	SOFT GR PHILLIPS	306
SGFMN106	6 PIECE FILE SET	363
SGHBF300A	FILE SET	363
SGHBF400A	FILE SET	363
SGHBF500A	FILE SET	363
SGT4BR	SOFTGRIP 1/4IN DRIVER	106
SHD10R	HARD GRIP INSTINCT SLOTTED DRV	305
SHD146O	HARD GRIP INSTINCT SLOTTED DRV	305
SHD6R	HARD GRIP SD	305
SHD8R	8IN FLAT	305
SHDP62IRO	HARD GRIP INSTINCT PHILLIPS DR	307
SN18B	BREAKER BAR	187
SQUARECOMB12	BLUE POINT COMBINATION SQUARE	681
ST50A	5PC OFFSET SCREWDRIVER SET.	311
STMD10	SOCKET	111
STMD11	SOCKET	111
STMD12	SOCKET	111
STMD14	SOCKET	111
STMD16	SOCKET	111
STMD18	SOCKET	111
STMD6	SOCKET	111
STMD7	SOCKET	111
STMD8	SOCKET	111
STMD9	SOCKET	111
SW121A	SOCKET	191
SW141A	SOCKET	191
SW161A	SOCKET	191
SW181A	SOCKET	191
SW201	SOCKET	191
SW221	SOCKET	191

AVIATION TOOL SETS CONTENTS

ATKEO (Cont'd)

Stock No.	Description	Page
SW241	SOCKET	191
SW261	SOCKET	191
SW281	SOCKET	191
SW301	SOCKET	191
SW321	SOCKET	191
SW341	SOCKET	191
SW361	SOCKET	191
SXK11	EXTENSION	189
SXK5	EXTENSION	189
T72FOD	1/4IN DR FOD RATCHET	105
TA3	ADAPTOR	109
TM10G	BREAK BAR	106
TMA2.5E	HEX DRIVER	120
TMA2E	HEX DRIVER	120
TMA3.5E	HEX DRIVER	120
TMA3E	HEX HEAD DR	120
TMD10	SOCKET	110
TMD11	SOCKET	110
TMD12	SOCKET	110
TMD14	SOCKET	110
TMD16	SOCKET	110
TMD18	SOCKET	110
TMD6	SOCKET	110
TMD7	SOCKET	110
TMD8	SOCKET	110
TMD9	SOCKET	110
TMRX10	TORQ ADAPTOR	258
TMRX12	TORQ ADAPTOR	258
TMRX8	TORQ ADAPTOR	258
TMS4E	SPEEDER	107
TMU101A	FLEXOCKET	114
TMU81B	FLEXOCKET	114
TMU8B	UNIVERSAL JOINT	109
TMXK2	EXTENSION	108
TMXK4	EXTENSION	108
TMXK60	EXTENSION	108
TPMA12FOD	FOD TAPE	N070
TZK7	TWEEZER SET7	561
V01012B	WRENCH	254
V01214B	WRENCH	254
V01416B	WRENCH	254
V01618B	WRENCH	254
V01820B	WRENCH	254
V02022B	WRENCH	254
V02224B	WRENCH	254
V02426B	WRENCH	254
V02628B	WRENCH	254
V02830B	WRENCH	254
V03032B	WRENCH	254
V03234B	WRENCH	254
V03440B	WRENCH	254
V03638B	WRENCH	254
V04042B	WRENCH	254
V0810B	WRENCH	254
XS609A	WR SET	250
YA900	CENTER PUNCH	353

ATKAO

Stock No.	Description	Page
102TMXKV	EXT SET	
137CF	HIGH LEVERAGE COMBO PLIERS	337
196CF	LONG NOSE W/CUTTER	336
203FXLBP	3PC 3/8IN LOCKING EXT SET	177
211FCOA	CROWFEET	259
218AFP	3/8 DR SET	172
61ACP	PLIERS	336
86CF	DIAGONAL CUTTER	335
91ACP	PLIERS	337
A2A	ADAPTOR	144
ATI508K	CANNON PLUG PLIERS	N111
ATI508SG	SHEET HOLDER PLIERS	N093
ATI560C	MINA-VAC	N110
ATI590SMKSP1	SHEET METAL MECHANICS SET	N103
ATISK359495K	HI-LOK SET	
AW1015DHK	HEX WRENCH SET	270
BF185A	SANDING BLK	705
BF189A	SANDING BLK	705
BP12B	HAMMER	356
BP2B	HAMMER	356
BP4B	HAMMER	356
BP8B	HAMMER	356
C0402	KIT BAG	352
CD12A	TIN SNIP	698
CL402A	C CLAMP	564
CL403A	C CLAMP	564
AVSOSL9	OFFSET LEFT AVIATION SNIP	698
AVSOSR9	OFFSET RIGHT AVIATION SNIP	698
DB160C	60 PC HSS WIRE SET	492
DBF1/4C	1/4 DRILL BIT	383
DBF5/16C	5/16 DRILL BIT	383
ECF35	LIGHT	
F111	SOCKET	146
F301	SOCKET	146
F321	SOCKET	146
F5L	SLIDE BAR	143
F80FOD	3/8IN DR FOD RATCHET	141
FA10E	HEX DRIVER	158
FA12E	HEX DRIVER	158
FA4.5E	HEX DRIVER	158
FA4E	HEX DRIVER	158
FA5E	HEX DRIVER	158
FA6E	HEX DRIVER	158
FA7E	HEX DRIVER	158
FA8E	HEX DRIVER	158
FB335	FEELER GA	679
FU10B	FLEXOCKET	149
FU12B	FLEXOCKET	149
GA295	MIRROR	685
GA353B	4-JAW FLEX PICKUP TOOL	683
GAJ4A	4IN ADJ WRENCH	273
SGFMN106	6 PIECE FILE SET	363
HBFE24	24 OZ DB HAMMER	354
HBFN120A	SWISS FILE SET	364
HBPT16	16Z PLASTIC TIPPED HAMMER	355
HSG319	BI MOLD SOFT GRIP HACKSAW	358
KRA4107FPBO	7 DRAWER RC RED	51
LP6LN	6IN LONG NOSE LOCKING PLIER	338
LST50379	6 (150MM) W/QUICK-SPRING NUT	
MNH1002	5X POWER LIGHTED MAGNIFIER	RWD
MPC7A	7IN BENT NOSE MINI PLIERS	561
MPS7A	7IN STRAIGHT MINI PLIERS	561
NYZ7007HD	MASTIC REMOVAL HAND KIT....	424
OEX080B	1/4IN WRENCH	247

Stock No.	Description	Page
OEX10B	5/16 FLKDR COMBO WRENCH	244
OEX11B	11/32 FLKDR COMBO WRENCH	244
OEX12B	3/8 FLKDR COMBO WRENCH.	244
OEX14B	7/16 FLKDR COMBO WRENCH	244
OEX16B	1/2 FLKDR COMBO WRENCH	244
OEX18B	9/16 FLKDR COMBO WRENCH	244
OEX20B	5/8 FLKDR COMBO WRENCH	244
OEX22B	11/16 FLKDR COMBO WRENCH	244
OEX24B	3/4 FLKDR COMBO WRENCH	244
OEX26B	13/16 FLKDR COMBO WRENCH	244
OEX28B	7/8 FLKDR COMBO WRENCH	244
OEX30B	15/16 FLKDR COMBO WRENCH	244
OEX32B	1IN FLKDR COMBO WRENCH	244
OEX34B	1-1/16 FLKDR COMBO WRENCH	244
OEX36B	1-1/8 FLKDR COMBO WRENCH	244
OEX40B	1-1/4 FLKDR COMBO WRENCH	244
PK52A	SCRAPER	366
PPC905B	PUNCH	352
PPC908B	PUNCH	352
PPC910B	PUNCH	352
PPC912B	PUNCH	352
PPCSG710	PUNCH-CHISEL SET S/ GRIP	353
PT5C	TEL 2LB PICK UP TOOL CHROME	684
PTM143	INSPECTION MIRROR	685
PTS5	SCRIBER	684
R1011C	RATCHET WRENCH 5/16INX11/32IN	239
R1214C	RATCHET WRENCH 3/8 X 7/16 IN	239
RWTP9	9IN REVSBLE SFTY WIRE PLIERS	423
RXFS2432B	WRENCH	257
RXFS605B	WRENCH SET.	257
SA10E	HEX DRIVER	196
SA12E	HEX DRIVER	196
SA14E	HEX DRIVER	196
SA16E	HEX DRIVER	196
SA18E	HEX DRIVER	196
SA20E	HEX DRIVER	196
SA24E	HEX DRIVER	196
SF081	SOCKET	148
SF101	SOCKET	148
SF121	SOCKET	148
SF141	SOCKET	148
SF161	SOCKET	148
SF181	SOCKET	148
SF191	SOCKET	148
SF201	SOCKET	148
SF221	SOCKET	148
SF241	SOCKET	148
SF261	SOCKET	148
SF281	SOCKET	148
SF301	SOCKET	148
SF321	SOCKET	148
SG4ASABR	INSTINCT AWL	328
SG5ASABR	INSTINCT AWL	328
SG5ASABR	INSTINCT AWL	328
SGD2BR	SOFT GR SD	305
SGD304BO	MINI SLOTTED SCREWDRIVER ORG	305
SGD304BR	MINI SLOTTED SCREWDRIVER RED	305
SGDP63IRBR	SOFT GR PHILLIPS	306
SGHBF300A	FILE SET	363
SGHBF400A	FILE SET	363
SGHBF500A	FILE SET	363

ATKAO (Cont'd)

Stock No.	Description	Page
SGHBF500A	FILE SET	363
SGHBF500A	FILE SET	363
SGT4BR	SOFTGRIP 1/4IN DRIVER	106
SHD6R	HARD GRIP SD	305
SHD8R	8IN FLAT	305
SHDP22IRR	NO. 2 RED STUBBY	307
SHDP61O	HARD GRIP INSTINCT PHILLIPS DR	307
SHDP62IRO	HARD GRIP INSTINCT PHILLIPS DR	307
SSDE63C	ELEC SD 3/16IN X 3IN FLAT	308
SSDE66C	ELEC SD 3/16IN X 6IN FLAT	308
ST50A	5PC OFFSET SCREWDRIVER SET.	311
STMD10	SOCKET	111
STMD11	SOCKET	111
STMD12	SOCKET	111
STMD14	SOCKET	111
STMD16	SOCKET	111
STMD18	SOCKET	111
STMD6	SOCKET	111
STMD7	SOCKET	111
STMD8	SOCKET	111
STMD9	SOCKET	111
T72FOD	1/4IN DR FOD RATCHET	105
TM10G	BREAK BAR	106
TM5	SLIDE BAR	107
TM61A	FLEXTENSION	108
TMA2.5E	HEX DRIVER	120
TMA2E	HEX DRIVER	120
TMA3.5E	HEX DRIVER	120
TMA3E	HEX HEAD DR	120
TMS4EK	1/4IN SPEEDER	107
TMS4EK	1/4IN SPEEDER	107
TMU8B	UNIVERSAL JOINT	109
TMXK2	EXTENSION	108
TMXK4	EXTENSION	108
TMXK60	EXTENSION	108
TPMA12FP	FOD TAPE	N070
VGP12406	LKG C CLAMP	565
VS814A	WR SET	256
YA900	CENTER PUNCH	353
ZEPZKLS-Z	KWIK-LOK TEMPO KIT	N082

ATKBSM

Stock No.	Description	Page
110TMDY	1/4IN DR 10PC 12PT SAE SKT SET	110
6HR	FILE HALF ROUND 6IN	363
6MA	FILE MILL 6IN	363
6R	FILE ROUND 6IN	363
86CF	DIAGONAL CUTTER	335
AD8A	8IN ADJUSTABLE WRENCH	272
ATI590SMKSP1	SHEET METAL MECHANICS SET	N103
AVSL10	REGULAR LEFT AVIATION SNIP	698
AVSR10	REGULAR RIGHT AVIATION SNIP	698
AVSS10	REGULAR STRAIGHT AVIATION SNIP	698
GA295	MIRROR	685
GA616	FILE HANDLE	364
GA98A	FILE HANDLE PLASTIC	364
LP404	4PC LOCKING PLIERS SET	338
OEX707B	7PC COMBO WR SET 3/8 TO 3/4	244
OXI7B	WRENCH	248
OXI8B	WRENCH	248
OXI9B	WRENCH	248
PK23A	SCRAPER	366
PL400B	PLIER SET	334
PT5C	TEL 2LB PICK UP TOOL CHROME	684
R810C	RATCHET WRENCH 1/4INX5/16IN	239
RULER120	12 IN. RULE	682
SH6ASA	STUBBY AWL	328
SHDX80O	ORANGE 8PC HARD GRIP SCRDR SET	304
SSDMR4BO	SCREWDRIVER	315
T72	72 TOOTH STD HANDLE RATCHET	103
VO810B	WRENCH	254
XS67A	BOXOCKET	250

ATKAV

Stock No.	Description	Page
112RT	1/4IN SAE LOW PROF RAT SKT SET	112
120SSDP	OFFSET SD PH1 X PH2	311
134ATMP	1/4" DR. SET	126
20SSD	OFFSET SD .050 X 5/16	311
497CF	90 DEGREE ANGLE JAW PLIERS	336
61ACP	PLIERS	336
BHS13A	BLX13 SET	269
BP12B	HAMMER	356
DS809K	IGN WR SET	255
E703BCG	NEEDLENOSE SERRATED	341
E706BCG	LNG ANGLE FLUSH CUT	342
E709BCG	4IN CUTTER TAPER FULL FLUSH	342
E713BCG	SERRATED SNIPENOSE PLIER	341
ECF925C	LIGHT	
FB325A	FEELER GA	411
GA199A	SCREWSTART	317
GA353B	4-JAW FLEX PICKUP TOOL	683
GAJ4A	4IN ADJ WRENCH	273
GAJ8A	8IN ADJ WRENCH	273
HBFE24	24 OZ DB HAMMER	354
HBPT16	16Z PLASTIC TIPPED HAMMER	355
KER1600SO	CHIVE KNIFE	
NDD900B	NUT DRIVER SET 9PC SAE	318
OEX10B	5/16 FLKDR COMBO WRENCH	244
OEX11B	11/32 FLKDR COMBO WRENCH	244
OEX707B	7PC COMBO WR SET 3/8 TO 3/4	244
OEX8B	1/4 FLKDR COMBO WRENCH	244
OXI4SB	WRENCH	248
OXI5SB	WRENCH	248
OXI6SB	WRENCH	248
OXI7B	WRENCH	248
OXI8B	WRENCH	248
PL400B	PLIER SET	334
PT28E	MAGNETIC PICK-UP TOOL.	684
PTM157	INSPECTION MIRROR.	685
PWCS9	WIRE STRIPPER MULTI-TOOL	
SGASA204A	SOFT GRIP MINI PICK SET	328
SGDE70	ELEC SCREWDRIVER	308
SGDMRC44B	SG RATCHETING.	314
SGDP122BR	SOFT GRIP PHILLIPS CABNT DRIVR	306
SGDP162BR	SOFT GRIP PHILLIPS CABNT DRIVR	306
SGDP82BR	SOFT GRIP INSTINCT PHILLIPS DR	306
SGDX40BR	4PC RED SOFT GRIP SCRDRVR SET	303
SGDX80BR	RED 8PC SOFT GRIP SCRDR SET	303
TB50	TOTE BAG 20X11X9	71
TPMA12FP	FOD TAPE	N070
TZK5	TWEEZER SET5	561
YA480B	SCREWDRIVER	317

TOOL MANAGEMENT & SAFETY

Aviation Dog Boxes

Aviation technicians told us what they need. And we listened. Snap-on is excited to introduce this new line of rolling tool boxes with convenient hand-tow handles. Available in three sizes, these dog boxes let you load up the tools you need for a specific task and comfortably wheel them across the tarmac, from hangar to hangar, through the terminal or on a plane.

Interchangeable Handles

- Small and medium dog boxes feature an interchangeable hard steel wagon-style handle that keeps the box from wandering or nipping at your heels, or a soft nylon leash so you can choose the hand-tow handle that best fits your needs
- Handles can be quickly installed or changed with the wire lock pin

Deluxe Wagon-Style Handle

- The large dog boxes feature a deluxe hard steel wagon-style handle that is easy to steer and easy to control
- The swivel feature allows for a comfortable pulling position while the spring-loaded action keeps the handle in the upright position when the box is at rest

Hinged And Foldable Top

- Both large dog boxes feature a front lid that folds up and under the top lid to create a convenient, flat work surface, while still allowing access to the drawers
- When fully closed, the hinged cover lets you keep the drawers and box securely locked

Removable Chassis

- Each dog box can be removed from the rolling chassis with convenient lifting handles to allow for stationary storage on a bench or roll cab for easy accessibility

Rubber Wheels

- All models feature rubber caster wheels for a smooth and quiet ride along with maximum shock absorption
- Wheels can also be locked for safety

Specification	KRDB18	KRDB24	KRDB265	KRDB269
Brand	Blue-Point®	Blue-Point	Snap-on®	Snap-on
Description	Dog Box Small, Wheeled Tool Box	Dog Box Medium, Wheeled Tool Box	Dog Box Large, 5-Drawer Wheeled Tool Box	Dog Box Large, 9-Drawer Wheeled Tool Box
Storage Space (cubic inches)	1,530	2,540	4,452	4,288
Storage Space (square inches)	525	670	1,814	1,753
Number of Trays	4	4	—	—
Number of Drawers	—	—	5 full length	3 full length 6 compartment
Cantilever, Split-Top Opening	Yes	Yes	—	—
Flat Work Top	—	—	Yes	Yes
Pull Handle*	Interchangeable hard steel wagon handle or soft nylon leash	Interchangeable hard steel wagon handle or soft nylon leash	Deluxe hard steel wagon handle with soft grip	Deluxe hard steel wagon handle with soft grip
Carrying Handle	Yes	Yes	No	No
Rubber Wheels	Yes	Yes	Yes	Yes
Removable Chassis	Yes	Yes	Yes	Yes
Length, inches (mm)	18 (457)	24 (610)	26 (660)	26 (660)
Width, Inches (mm)	10 (254)	12 (305)	14 ¾ (375)	14 ¾ (375)
Height, Inches (mm)	13 ¼ (349)	12 (305)	17 ¼ (438)	17 ¼ (438)
Weight, lb (kg)	32 (14)	55 (25)	103 (47)	103 (47)

Already own a Snap-on tool box? Add a rolling-chassis to create your own dog box.
DB18CHASSIS: 18" Chassis with interchangeable hard and soft handles
DB24CHASSIS: 24" Chassis with interchangeable hard and soft handles
DB26CHASSIS: 26" Chassis hard handle only

*Designed to be pulled by hand

Flight Line Roll Cabinets

KGVFL756CPN
5 Drawer Snap-on Red

KGVFL758PKS
6 Drawer Arctic Silver

Exclusive FOD free "Kingpinless" caster design

- Wheel is solid rubber for maximum shock absorption
- Can be used to retrofit KRL756, KRL722, KRL1056, KGV756, KGV722, and all Classic and Heritage series boxes:

Swivel caster: 8-21839B
Fixed caster: 8-21939A

Designed to Reduce Potential Sources of FOD

- Laser-cut logo eliminates nameplates and decals
- 14 ga. base pan helps seal bottom of cabinet to reduce possibility of objects falling out, and provides lifting point for forklift truck
- T-bar easily allows drawers to be locked for movement without using a key, eliminating another potential FOD source
- Stainless steel cap has no wood core and wraps around all four sides of the boxes to keep the elements and debris out
- Phantom Casters are "Kingpinless", FOD free, rated at 600 lb capacity, and whisper quiet.

Drawer Configurations

Drawer Depth (number each)	KGVFL756	KGVFL758
2"	0	3
4"	4	2
8"	1	0
10"	0	1
TOTAL	5	6

- Easier to roll over long distances and hangar tracks
- All surfaces are powder-coated inside and out for maximum corrosion resistance
- Double-wall construction and precision welding for rugged durability
- Piano hinge lock bar for security Flat finish reduces glare in harsh lighting
- All colors come standard with black trim
- Available in six colors and two standard configurations — 5-drawer and 6-drawer, with 8" or 10" deep bottom drawer
- Available in Snap-on Red (PND), Ultra Yellow (PBU), Olive Drab (PHG) , Matte Black (POT), Putty (POS), and Texture Grey (PHY)
- Made in the U.S.A.

KGVFL758POT
6 Drawer Matte Black

KGVFL756CPOS
5 Drawer Desert Tan

Overall Dimensions
Width: 35-5/8"
Height: 40"
Depth: 24"
Weight: 415 lbs.
16,368 cubic inches
3,410 square inches

Available Colors

Color	5-DRAWER	6-DRAWER
Snap-on Red	KGVFL756CPN	KGVFL758PN
Ultra Yellow	KGVFL756CPDO	KGVFL758PDO
Olive Drab	KGVFL756CPHG	KGVFL758PHG
Matte Black	KGVFL756CPOT	KGVFL758POT
Desert Tan	KGVFL756CPOS	KGVFL758POS
Arctic Silver	KGVFL756CPKS	KGVFL758PKS

⚠ WARNING

• Read safety precautions on pages W1 to W4

FOD PREVENTION

FOD Hand Tools

FOD (Foreign Object Damage) Ratchets

- Designed to help prevent foreign object damage in sensitive work enviroments
- Coverplate and reverse lever permanently affixed to ratchet head with rivets to prevent chance of small parts of debris

GF80FOD

Stock No.	Drive Size	Description	Gear Teeth	Swing Arc	A	B	C
T72FOD	¼"	Chrome Finish Standard Handle	72	5°	7/16	1 5/16	4-1 1/16
GT72FOD	¼"	Industrial Finish Standard Handle	72	5°	7/16	1 5/16	4-1 1/16
TL72FOD	¼"	Chrome Finish Long Handle	72	5°	7/16	1 5/16	6-½
GTL72FOD	¼"	Industrial Finish Long Handle	72	5°	7/16	1 5/16	6-½
F80FOD	⅜"	Chrome Finish Standard Handle	80	4.5°	9/16	1-¼	7-7/16
GF80FOD	⅜"	Industrial Finish Standard Handle	80	4.5°	9/16	1-¼	7-7/16
GFL80FOD	⅜"	Industrial Finish Long Handle	80	4.5°	9/16	1-¼	10-5/16
GS80AFOD	½"	Industrial Finish Standard Handle	80	4.5°	¾	1-⅝	10-5/16
S80AFOD	½"	Chrome Finish Standard Handle	80	4.5°	¾	1-⅝	10-5/16
GSL80AFOD	½"	Industrial Finish Long Handle	80	4.5°	¾	1-⅝	15

Snap-on Industrial FOD ratchets feature rivets instead of screws for maximum FOD and FME program conformance.

No one offers more FOD and FME solutions than Snap-on Industrial!



FOD (Foreign Object Damage) 12 Foot Tape Measure

- Recessed rivets for FOD prevention
- Clasp on rear of case for use with universal tether
- ¾" x 12 ft. tape
- Inch scale with 16" stud markings

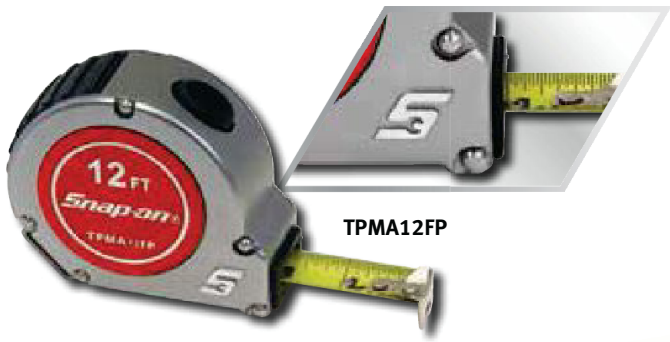

TPMA12FP

SET306N2STE

Round Nylon-Framed Stainless Steel Mirror

Round nylon-framed stainless steel mirror uses a FOD free ball & socket configuration allowing 360 degree rotation to prevent chance of small parts debris.

- 6-1/2" to 33" telescoping stainless steel handle
- Soft vinyl grip
- 7" collapsed, 36-1/4" extended overall length

Stock No.	Diameter
SET309N2STE	2-¼"
SET306N2STE	1-¼"

UIM225HD

UIM225HD FOD Mirror

This telescoping mirror was designed in conjunction with a major aircraft manufacturer. The extension shaft has been modified to reduce the chance of the sections pulling apart. This substantially reduces the likelihood of breakage and, ultimately, FOD.

- 2-¼" diameter mirror
- 6-½" long collapsed
- 35" maximum extended length.

Aeroprobe® & Stark Kit

Aeroprobe® Electronic Tool Detection System

Aeroprobe can be easily integrated into your present aircraft technician safety program to minimize aircraft downtime and danger of foreign object damage from misplaced tools. As a supplement to visual inspection, the Aeroprobe is a completely portable self-contained system for locating misplaced tools in and around aircraft.

- Save lives by preventing accidents
- Save man-hours searching for misplaced tools
- Reduce aircraft downtime
- Prevent tear downs
- Prevent damage to aircraft

Activator

Simply pass your existing tools over the activator and they are magnetically sensitized.

Validator

The Validator is used to verify that a tool has sufficient sensitivity for detection.

Detector & Probe Assembly

The portable detector pinpoints the location of misplaced tools and is powered by regular or rechargeable batteries. Small enough to fit into confined areas, yet provides wide area scanning capability.

Head Set

A headset is used to receive audio signals from the detector indicating the presence of a sensitized tool.

STARK *Search Tool And Recovery* Kit

The exclusive Snap-on® Industrial STARK contains what you need to find and recover misplaced tools. The kit begins with Aeroprobe Detection components and adds the most commonly used items for searching out and removing any misplaced tools.
Includes the BK5500 Digital Imaging Video Inspection Scope for maximum versatility. See page 403 for full details on the BK5500 and for additional accessories.
The STARK kit comes ready to travel, packed in a Pelican Storm® case with custom fitted Tool Control Foam inserts.

Aeroprobe Kit Contents

		L5DAK-1	L5DDK-1	L5DAVI-I-II	STRK01
Stock No.	Description	Activation Kit	Detection Kit	Aeroprobe Tool Detection & Recovery System	STARK Kit
L5DAC-2	Aeroprobe Activator	•		•	
L5DVL-1	Aeroprobe Validator	•		•	
L5DDT-3	Aeroprobe Detector		•	•	•
L5DHS-1	Aeroprobe Head Set		•	•	•
L5DPR-2	Aeroprobe Probe Assembly		•	•	•
L5DBH-1	Aeroprobe Belt Carrying Harness		•	•	•
L5DSC-3	Aeroprobe High Impact Case	•	•	•	•
BK5500	Snap On Video Inspection Scope				•
BK5500-7	8.5 mm 72 in. Straight View Image				•
DPTC24	24" Four-Claw Flexible Pick-Up Tool				•
DPTM24	24" Flexible Shaft Magnetic Pick-Up Tool				•
ECF1600	16" Light, Bendable w/ 10" Flexible Shaft				•
ECF975AX	5.8 Watt 95 Lumen Flashlite				•
GA294	2 1/8" X 3 1/2" Mirror w/ 15" Shaft				•
GA295	2-1/4" Round Mirror w/ 14" Shaft				•
HIM272000000	Pelican Storm Case				•
VFI10561PNP	FOD Foam Tool Control Inserts				•

Aeroprobe Tool Detection & Recovery System: L5DAVI-I-II

Snap-on LEVEL 5 Tool Control System™

Contact Your Snap-on Industrial sales representative for complete details and ordering information.

⚠ WARNING • Read safety precautions on pages W1 to W4

AVIATION SPECIALTY TOOLS

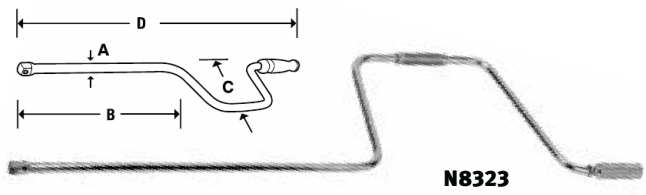

N8323

N8323 1/2" Square Drive Deep Throw Speeder Wrench

- This loading tool is used on military aircraft
- Used to manually fold wings and lower landing gear

Size	Stock No.	A	B	C	D
½"	N8323	½"	18 1/16"	8 ½"	32 7/8"



ACP8

ACP8 Electrical Connector Pliers

- Single-handed adjustable electrical connector pliers with non-marring jaws make accessibility to confined areas much easier.

Stock No.	A	B
ACP8	8"	¼" – 1 5/8"

388CFCT

86CFCT

E710BCGCT

Cushion Throat Diagonal Cutters

- Urethane insert in jaws captures cut off material, reducing likelihood of FOD

Stock No.	Description	Jaw Length, inches	Length, inches
86CFCT	Standard Diagonal	13/16"	7 3/8"
87CFCT	Standard Diagonal	¾"	6 5/16"
388CFCT	High Leverage Cutter	1 1/16"	8 5/16"
E710BCGCT	Tapered Head	11/16"	5 3/10"

TFY72

TY72



FCY72

Hi-Lok® Ratchets with Dual 80® Ratchet Technology

- Dual 80 Ratchet Technology features dual pawls and a 72 tooth gear providing for more power in less lateral space
- Six teeth in full contact with gear to provide strength and durability
- A mere 5° ratcheting arc
- Sealed head keeps dirt and other contaminants out of the head mechanism
- For use with standard or Hi-Lok® sockets

Stock No.	Square Drive, inches	Description	Gear Teeth	Swing Arc	A	B	C	Repair Kit
TFY72	¼	Flex Head Hi-Lok Ratchet	72	5°	7/16	15/16	6 ¼	RKRTY72
TY72	¼	Hi-Lok Ratchet	72	5°	7/16	15/16	4 5/8	RKRTY72
FCY72	3/8	Compact Head Hi-Lok Ratchet	72	5°	7/16	15/16	4 5/8	RKRFCY72

WTS6

WTS6 6" Reversible Wire Twister

9" twist rod in a 6" tool makes this a Snap-on Exclusive Feature

- Wave jaw to eliminate wire damage
- One-click technology for ease of opening and closing
- Improved, smoother operating reversible twist mechanism
- Sleek narrow head for tight spaces
- Heat & chemical resistant Viton® cushion throat – no F.O.D.
- Textured grip for ease of handling
- Eco-friendly finish

Ultra Low-Profile Screwdrivers

- Super-flat, low-profile design fits in tight areas
- Measures 108 mm in length and tapers from 16 mm at base to 11 mm at head
- Tether hole in handle to prevent FOD

Stock No.	Description
SSFP1	#1 Phillips® Tip
SSFP2	#2 Phillips® Tip
SSF1	Flat Tip

Spline Sockets

209TFES

207TFEL

The complete assortment of Snap-on spline sockets can be found on pages:
- ¼" Drive - page 116
- ⅜" Drive - page 152
- ½" Drive - page 194

For more information, contact your Snap-on Industrial Account Manager or call 877-740-1900

Spline Wrenching Tools

Snap-on® spline wrenching tools have been developed to service high tensile strength spline nuts and bolts widely used on both military and commercial aircraft. Precise, radial spline teeth engage the fastener teeth over a wider area to minimize stress, and allow application of high torque to reduce risk of damage to the fastener or to the tool. Chrome tools comply with AS954, Military Spec. MS-33787 and MIL-W-8982. The unique spline wrenching configuration can also be used on ordinary six- and 12-point fasteners with an advantage similar to the Snap-on Flank Drive® wrenching system.

Stock No.	209TFES	207TFEL
Country of Origin	USA	USA
Description	9 Piece ¼" and ⅜" Drive Shallow Spline Socket Set	7 Piece ¼" and ⅜" Drive Deep Spline Socket Set
¼" Drive Hex Sockets Included	TEL7B (#7), TEL8B (#8), TEL9B (#9), TEL10B (#10)	TEL7B (#7), TEL8B (#8), TEL10B (#10)
⅜" Drive Hex Sockets Included	FEL120B (#12), FEL140B (#14),FEL160B (#16) FEL180B (#18), FEL200B (#20)	FEL120B (#12), FEL140B (#14), FEL180B (#18), FEL200B (#20)
Complies with A5954	Yes	Yes
Complies with Military Spec MS-33787	Yes	Yes
Complies with MIL-W-8982	Yes	Yes
Finish	Chrome	Chrome
Material	Special Alloy Steel	Special Alloy Steel
Heat Treated for Strength and Durability	Yes	Yes

TES10B

FES200B



TEL10B

FEL200B

Shallow, inches, 1/4" Drive

		Stock No.	A	B	C	D	E
#7	7/32	TES7B	11/32	7/16	15/32	15/16	7/32
#8	1/4	TES8B	3/8	7/16	15/32	15/16	9/32
#9	9/32	TES9B	7/16	7/16	—	15/16	—
#10	5/16	TES10B	15/32	15/32	—	15/16	11/32
#12	3/8	TES12	35/64	35/64	19/32	59/64	23/64
#14	7/16	TES14	5/8	39/64	23/32	1 3/64	7/16

Shallow, inches, 3/8" Drive

		Stock No.	A	B	C	D	E
#12	3/8	FES120B	17/32	21/32	15/32	1 1/16	11/32
#14	7/16	FES140B	5/8	11/16	1/2	1 3/32	7/16
#16	1/2	FES160B	23/32	23/32	—	1 3/32	—
#18	9/16	FES180B	13/16	13/16	—	1 3/32	15/32
#20	5/8	FES200B	7/8	7/8	—	3/8	9/16

209TFES Shallow Spline Socket Set

- Includes ¼" drive TES7B–TES10B and ⅜" drive FES120B–FES200B Shallow Spline Sockets (9pc) (#7–#20, 7/32"–5/8") in magnetic socket tray

Deep, inches, 1/4" Drive

		Stock No.	A	B	C	D	E
#7	7/32	TEL7B	11/32	7/16	1 17/32	2	7/32
#8	1/4	TEL8B	3/8	7/16	1 17/32	2	9/32
#10	5/16	TEL10B	15/32	15/32	—	2	11/32

Deep, inches, 3/8" Drive

		Stock No.	A	B	C	D	E
#12	3/8	FEL120	17/32	21/32	1 17/32	2 1/8	11/32
#14	7/16	FEL140B	5/8	11/16	1 17/32	2 1/8	7/16
#18	9/16	FEL180B	13/16	13/16	—	2 3/8	15/32
#20	5/8	FEL200B	7/8	7/8	—	2 3/8	9/16

207TFEL Deep Spline Socket Set

- Includes ¼" drive TEL7B–TEL10B and ⅜" drive FEL120B–FEL200B Deep Spline Sockets (7pc) (#7–#20, 7/32"–5/8") in magnetic socket tray

INDUSTRIAL TORQUE WRENCHES

ControlTech™

ControlTech™ Aluminum Electronic Torque Wrenches

Snap-on ControlTech™ Aluminum Electronic Torque Wrenches are lightweight, durable and powerful, making them an essential tool for aviation and aerospace. At just one pound, the weight is comparable to mechanical micrometer torque wrenches, yet they provide instant data on the exact torque actually applied - something mechanical wrenches can't do. The lightweight design reduces fatigue and enables more precise torque application across multiple fasteners.

Professional Strength in Lightweight Aluminum

The lightweight, hard anodized aluminum body is designed to stand up to industrial use and each Snap-on ControlTech™ Industrial Electronic Torque Wrench is backed by an Industry-leading 2 year warranty.

Torque and Angle Combo Mode

The patent-pending Torque and Angle combo mode provides the most accurate and fastest way to achieve torque plus angle in a single motion. Control torque accuracy to +/-2% clockwise, +/-3% counterclockwise. Control angle accuracy to +/-1% of reading and +/-1 degree.

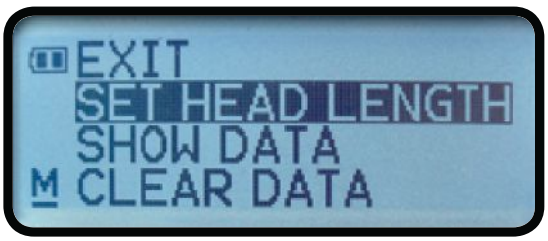

LED Indicator Lights

Dual side LED indicator lights with configurable settings provide operational guidance.

Built-In Calibration Factor

Patent Pending* built in calibration factor to use with interchangeable heads and torque adapters eliminates the need to perform

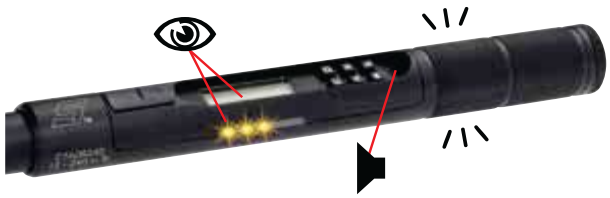

Multi-Sensory Indicators

Snap-on ControlTech™ Industrial Torque Wrenches are ideal for any working condition thanks to audible, tactile and visual indicators. The easy-to-read LCD screen, LED indicator lights, audible beep and handle vibration work together to signal when torque is within the targeted range.

DUAL 80 TECHNOLOGY

Dual 80® Technology

Provides precise yet strong ratchet function with minimal ratcheting arc and very little lost motion, allowing you to ratchet in tighter areas (Available model CTAL1R240).

Convenience & Control

Snap-on Control Tech Industrial Electronic Torque Wrenches are fully programmable for reliable, consistent, repeatable torque application. Every model features a large, backlit LCD screen for better visibility in a variety of working conditions and a high storage memory capacity for 1,500 readings.

*U.S. and Foreign Patents Pending

ControlTech™

Convenient Data Download

USB plug and play technology allows data download without additional software. Simply connect the included USB cord to the electronic torque wrench and a PC to drag and drop data for an audit proof trail and process control

DATE/TIME	MIN TARGET TORQUE	MAX TARGET	PEAK TORQUE	MIN TARGET	MAX TARGET	PEAK ANGLE	TORQUE UNITS	TORQUE STATUS	ANGLE STATUS	MODE COUNT
1/1/2013 16:38	20	30	20.3	0	0	0	FT-LB	OK	OK	3
1/1/2013 16:38	20	30	20.55	0	0	0	FT-LB	OK	OK	2
1/1/2013 16:38	20	30	20.55	0	0	0	FT-LB	OK	OK	1
1/1/2013 6:39	0	0	25.09	45	60	46	FT-LB	OK	OK	1
1/1/2013 16:39	0	0	26.62	45	60	46	FT-LB	OK	OK	2
1/1/2013 16:39	0	0	26.57	45	60	46	FT-LB	OK	OK	3
1/1/2013 16:41	0	0	23.32	50	65	52	FT-LB	OK	OK	3
1/1/2013 16:41	0	0	19.98	50	65	51	FT-LB	OK	OK	2
1/1/2013 16:41	0	0	22.18	50	65	52	FT-LB	OK	OK	1
1/1/2013 16:50	25	35	28.29	50	65	57	FT-LB	OK	OK	3
1/1/2013 16:51	25	35	27.76	50	65	52	FT-LB	OK	OK	2
1/1/2013 16:51	25	35	28.15	50	65	54	FT-LB	OK	OK	1
1/1/2013 16:52	19	22	23.69	0	0	0	FT-LB	HIGH	OK	1
1/1/2013 16:54	0	0	26.73	43	49	53	FT-LB	OK	HIGH	1

Fully Programmable

50 memory presets with a batch count up to 99. Presets can be locked to prevent inadvertent changes or tampering.

Sequence Programming

Allows you to program different torque applications in sequence and lock in job mode to ensure the operator follows sequence without error.

Calibration Due Indicator

Using a patent-pending* time based calibration technology, the Snap-on ControlTech™ Industrial Torque Wrench alerts you when calibration is needed.

Reliable Data Trail

Time stamped data trail for quality control, job auditing, and torque verification.

Stock No.	CTAL1240	CTAL1R240	CTAL1J240
Description	Industrial Electronic Torque, Angle & Memory Wrench; ¼" Square Drive	Industrial Electronic Torque, Angle & Memory Wrench; ¼" Fixed Head Ratchet	Industrial Electronic Torque, Angle & Memory Wrench; Interchangeable Head; J Shank
Square Drive	¼"	¼"	—
Head Type	Fixed Head & Fixed Drive	Sealed Ratchet Fixed Head	Interchangeable; J-Shank
Geer Teeth	—	72	—
Geer Action	—	5.0 Degrees	—
Shank Diameter	—	—	J (0.425")
Torque Range, in lb	12-240	12-240	12-240
Torque Range, ft lb	1-20	1-20	1-20
Torque Range, Nm	1.4-27.2	1.4-27.2	1.4-27.2
Torque Accuracy	+/- 2% Clockwise; +/- 3% Counterclockwise		
Angle Range	0-360 degrees	0-360 degrees	0-360 degrees
Angle Accuracy	+/-1% of Reading +/-1 Degree @ Angular Velocity > 10 Degrees/Sec < 180 Degrees/Sec	+/-1% of Reading +/-1 Degree @ Angular Velocity > 10 Degrees/Sec < 180 Degrees/Sec	+/-1% of Reading +/-1 Degree @ Angular Velocity > 10 Degrees/Sec < 180 Degrees/Sec
Dual 80®	—	Yes	—
Storage Capacity	1,500 Readings	1,500 Readings	1,500 Readings
Number of Presets	50	50	50
Languages	English, Spanish, French, German	English, Spanish, French, German	English, Spanish, French, German
Operating/Storage Temperature	0 to 130˚F (-18 to 54˚C)	0 to 130˚F (-18 to 54˚C)	0 to 130˚F (-18 to 54˚C)
Rugged and Lightweight 6061-T6 Aerospace Aluminum Body	Yes	Yes	Yes
Housing Color	Black Anodized	Black Anodized	Black Anodized
Batteries Included	3 x AAA Lithium	3 x AAA Lithium	3 x AAA Lithium
Weight	1.1 lbs	1.2 lbs	1.0 lbs
Head Depth (A)/ Width (B)	¾" (A) / ¾" (B)	¾" (A) / ⅞" (B)	—
Length	12.4	14.1	12.5"*
Storage Case Included	Yes	Yes	Yes
Warranty	2-Year	2-Year	2-Year

Complies with ISO®-6789-2003 and ASME® B107.300-2010 (B107.28) Standards for Electronic Torque Instruments

*Wrench length specification does not include the length of interchangeable heads.

AEROSPACE STANDARDS

Commitment to Quality and Standards

Snap-on® is committed to meeting ANSI and global product standards, and often goes beyond them. Whether it's Snap-on products or partner products, every tool we sell goes through rigorous testing for performance, quality, ergonomics, durability and safety. Done at our own corporate test facility in Kenosha, we pledge to meet or exceed the highest standards in the industry. At Snap-on, we:

- Are active participants in the creation of ANSI and other industry standards
- Hold regular meetings with government and industry bodies to review and update current and developing technologies
- Offer unique and proprietary products designed to go beyond the scope of ANSI and other standards

The Snap-on® Flank Drive® Advantage

Conventional 12-point wrench and the contact it makes on the corner of a nut or bolt. The corner can round off under high loads causing the wrench to slip.

A Snap-on® Flank Drive® wrench moves the contact away from the corners with a radius, then provides flat-to-flat contact for up to 20% more turning power.

AS954 Specification References Explained

318 Snap-on 12 point sockets, universal sockets, wrenches, and torque adaptors noted in our catalog completely meet the AS954 standard.

Competition implies meeting AS954 (Aerospace Standard) specification in their catalog. But they only reference ONE subsection of the standard.

AS954 Sub Sections	Sub Section Description	Snap-on	Competition
3.2	Material	X	
3.4.1 (sockets only)	Drive end dimensions	X	
3.4.1.1 (sockets only)	Internal drive opening	X	
3.4.1.1.1 (sockets only)	Detent	X	
3.4.2 (sockets only)	Tang engagement	X	
3.5	Hardness	X	
3.6	Plating	X	
3.6.1	Surface Finish	X	
3.6.3	Surface Condition	X	
3.7	Proof Load Test	X	
3.7.3.1	Cyclic Load test	X	
3.7.3.2	Fragmentation Test	X	
3.8.1	Wrench Design	X	X*
3.8.3	Wrench Opening Tolerance	X	
3.8.4.1 (sockets only)	Through hole clearance	X	
3.8.4.2 (sockets only)	Bolt Clearance Hole	X	
3.11	Workmanship	X	
3.11.1	Foreign Object Damage	X	

* as shown in competitor's catalog

1/4" & 3/8" Drive

Snap-on® offers over 300 hand tools that conform to Aerospace Standards AS954, AS4283, AS4984, and/or MIL-W-8982. They can be found in their respective locations in the Hand Tools section of this catalog.

The Stock No.s and descriptions are shown below, please reference the catalog pages shown for the complete description and specifications of these items

1/4" Drive Ratchets and Accessories

Stock No.	Description	Catalog Page
T72	Ratchet - Standard Handle - Sealed	103
GT72	Ratchet - Standard Handle - Sealed - Ind Finish	103
TMU8B	Universal Joint	109
TMS4E	Speeder	107
TMXK2	Knurled Extension - 2"	108
TMXK4	Knurled Extension - 4"	108
TMXK60	Knurled Extension - 6"	108
TMXK140	Knurled Extension - 14"	108
TM10G	Breaker Bar	106

3/8" Drive Ratchets and Accessories

Stock No.	Description	Catalog Page
F80	Ratchet - Standard Handle - Sealed	138
FL80	Ratchet - Long Handle - Sealed	138
FX1	Extension - Friction Ball - 1 1/2"	143
FXK3	Extension - Friction Ball - 3"	143
FXK6	Extension - Friction Ball - 6"	143
FXK8	Extension - Friction Ball - 8"	143
FX18	Extension - Friction Ball - 18"	143
FX24A	Extension - Friction Ball - 24"	143
F10LC	Breaker Bar	142
F4LB	Speeder	143
F4LBK	Speeder with knob	143
FU8A	Universal Joint	145

1/4" Drive, Semi Deep 12 Pt. Sockets, Page 110

Stock No.	Size (SAE)
TMDS6	3/16"
TMDS7	7/32"
TMDS8	1/4"
TMDS9	9/32"
TMDS10	5/16"
TMDS11	11/32"
TMDS12	3/8"
TMDS14	7/16"
TMDS16	1/2"
TMDS18	9/16"

1/4" Drive, Deep 12 Pt. Sockets, Page 111

Stock No.	Size (SAE)
STMD6	3/16"
STMD7	7/32"
STMD8	1/4"
STMD9	9/32"
STMD10	5/16"
STMD11	11/32"
STMD12	3/8"
STMD14	7/16"
STMD16	1/2"
STMD18	9/16"

1/4" Drive, Deep Flare-Nut Sockets - 12 Pt. Page 258

Stock No.	Size (SAE)
AN85086B	3/8"
AN85087B	7/16"
AN85088B	1/2"
AN85089B	9/16"

1/4" Drive, High Performance/Spline Sockets - Shallow Page 116**

Stock No.	Size (Spline / SAE)
TES7B	#7 - 7/32"
TES8B	#8 - 1/4"
TES9B	#9 - 9/32"
TES10B	#10 - 5/16"
TES12	#12 - 3/8"
TES14	#14 - 7/16"

1/4" Drive, High Performance/Spline Sockets Deep 6 Pt. Page 116**

Stock No.	Size (Spline / SAE)
TEL7B	#7 - 7/32"
TEL8B	#8 - 1/4"
TEL10B	#10 - 5/16"

1/4" Drive, High Performance/Spline Sockets Universal Page 116**

Stock No.	Size (Spline / SAE)
TESU8	#8 - 1/4"
TESU10	#10 - 5/16"

1/4" Drive, High Performance Sockets- Universal - 12 Pt. Page 115**

Stock No.	Size (SAE)
TDHU81A	1/4"
TDHU101A	5/16"
TDHU121A	3/8"

3/8" Drive, Semi Deep 12 Pt. Sockets, Page 147

Stock No.	Size (SAE)
FDS081	1/4"
FDS091	9/32"
FDS101	5/16"
FDS111	11/32"
FDS121	3/8"
FDS141	7/16"
FDS161	1/2"
FDS181	9/16"
FDS201	5/8"
FDS221	11/16"
FDS241	3/4"
FDS251	25/32"
FDS261	13/16"
FDS281	7/8"
FDS301	15/16"

3/8" Drive, Deep 12 Pt. Sockets, Page 148

Stock No.	Size (SAE)
SF081	1/4"
SF091	9/32"
SF101	5/16"
SF111	11/32"
SF121	3/8"
SF141	7/16"
SF161	1/2"
SF181	9/16"
SF191	19/32"
SF201	5/8"
SF221	11/16"
SF241	3/4"
SF251	25/32"
SF261	13/16"
SF281	7/8"
SF301	15/16"
SF321	1"

** Snap-on® spline wrenching tools have been developed to service high tensile strength spline nuts and bolts widely used on both military and commercial aircraft.
Precise, radial spline teeth engage the fastener teeth over a wider area to minimize stress, and allow application of high torque without damage to the fastener or to the tool.

Chrome spline tools comply with Military Spec. MS-33787 and MIL-W-8982. (Industrial finish tools comply with performance specifications and differ only in finish.) The unique patented spline wrenching configuration can also be used on ordinary 6 and 12-point fasteners with an advantage similar to the Snap-on Flank Drive® wrenching system.

⚠ WARNING

- Do not use chrome or industrial finish hand sockets with impact drivers
- Read safety precautions on pages W1 to W2

AEROSPACE STANDARDS

3/8" & 1/2" Drive

3/8" Drive, Universal 12 Pt. Sockets, Page 149

Stock No.	Size (SAE)
FU18B	9/16"
FU20B	5/8"
FU22B	11/16"
FU24B	3/4"

3/8" Drive, Deep Flare Nut Crowfoot Wrench, Page 260

Stock No.	Size (SAE)
AN850810B	5/8"
AN850811B	11/16"
AN850812B	3/4"
AN850813B	13/16"
AN850814B	7/8"
AN850815B	15/16"
AN850816B	1"
AN850817B	1 1/16"

3/8" Drive, High Performance/Spline Sockets - Shallow Page 152**

Stock No.	Size (Spline / SAE)
FES120B	#12 - 3/8"
FES140B	#14 - 7/16"
FES160B	#16 - 1/2"
FES180B	#18 - 9/16"
FES200B	#20 - 5/8"

3/8" Drive, High Performance/Spline Sockets Deep Page 152**

Stock No.	Size (Spline / SAE)
FEL120B	#12 - 3/8"
FEL140B	#14 - 7/16"
FEL160NP	#16 - 1/2"
FEL180B	#18 - 9/16"
FEL200B	#20 - 5/8"

** Snap-on® spline wrenching tools have been developed to service high tensile strength spline nuts and bolts widely used on both military and commercial aircraft.

Precise, radial spline teeth engage the fastener teeth over a wider area to minimize stress, and allow application of high torque without damage to the fastener or to the tool.

3/8" Drive, High Performance/Spline Sockets - Universal Page 152**

Stock No.	Size (Spline/SAE)
FESU120	#12 - 3/8"
FESU140	#14 - 7/16"
FESU160	#16 - 1/2"
FESU180	#18 - 9/16"

3/8" Drive, Torque Adaptors 12 Pt., Page 154

Stock No.	Size (SAE)
FRDH101	5/16"
FRDH121	3/8"
FRDH141	7/16"
FRDH161	1/2"
FRDH181	9/16"

3/8" Drive Sockets, Spline Torque Adaptors, Page 155**

Stock No.	Size (SAE)
FRES7	#7 - 7/32"
FRES8	#8 - 1/4"
FRES9	#9 - 9/32"
FRES10	#10 - 5/16"
FRES12	#12 - 3/8"
FRES14	#14 - 7/16"
FRES16	#16 - 1/2"
FRES18	#18 - 9/16"
FRES20	#20 - 5/8"
FRES22	#22 - 11/16"
FRES24	#24 - 3/4"

Chrome spline tools comply with Military Spec. MS-33787 and MIL-W-8982. (Industrial finish tools comply with performance specifications and differ only in finish.) The unique patented spline wrenching configuration can also be used on ordinary 6 and 12-point fasteners with an advantage similar to the Snap-on Flank Drive® wrenching system.

1/2" Drive Ratchets and Accessories

Stock No.	Description	Catalog Page
S80A	High Strength Ratchet - Standard Handle - Sealed	185
SL80A	High Strength Ratchet - Long Handle - Sealed	185
SX2	Knurled Extensions - 2 1/8"	189
SXK5	Knurled Extensions - 5"	189
SX20	Knurled Extensions - 20"	189
SX36	Knurled Extensions - 36"	189
S4	Speeder	188
S8	Universal Joint	190
SN15B	Breaker Bar - 15"	187

1/2" Drive, Semi Deep 12 Pt. Sockets, Page 193

Stock No.	Size (SAE)
SDH121	3/8"
SDH141	7/16"
SDH161	1/2"
SDH181	9/16"
SDH201	5/8"
SDH221	11/16"
SDH241	3/4"
SDH251	25/32"
SDH261	13/16"
SDH281	7/8"
SDH301	15/16"
SDH321	1"
SDH341	1 1/16"
SDH361	1 1/8"
SDH381	1 3/16"
SDH401	1 1/4"
SDH421	1 5/16"

1/2" Drive, Deep Flare Nut Crowfoot Wrenches, Page 262

Stock No.	Size (SAE)
AN850818B	1 1/8"
AN850819B	1 3/16"
AN850820B	1 1/4"
AN850821B	1 5/16"
AN850822B	1 3/8"
AN850823B	1 7/16"
AN850824B	1 1/2"
AN850825B	1 9/16"
AN850826B	1 5/8"
AN850827B	1 11/16"
AN850828B	1 3/4"
AN850829B	1 13/16"
AN850830B	1 7/8"
AN850831B	1 15/16"
AN850832B	2"
AN850834B	2 1/8"
AN850835B	2 3/16"
AN850836B	2 1/4"

1/2" Drive, Deep 12 Pt. Sockets, Page 192

Stock No.	Size (SAE)
S121A	3/8"
S141A	7/16"
S161A	1/2"
S181A	9/16"
S201	5/8"
S221	11/16"
S241	3/4"
S251	25/32"
S261	13/16"
S281	7/8"
S301	15/16"
S321	1"
S341	1 1/16"
S361	1 1/8"
S381	1 3/16"
S401	1 1/4"
S421	1 5/16"

1/2" Drive, High Performance/Spline Sockets - Shallow Page 194**

Stock No.	Size (Spline/SAE)
SES161	#16 - 1/2"
SES181	#18 - 9/16"
SES201	#20 - 5/8"
SES221	#22 - 11/16"
SES241	#24 - 3/4"
SES261	#26 - 13/16"
SES281	#28 - 7/8"
SES301	#30 - 15/16"

1/2" Drive, Spline Torque Adaptors Page 195**

Stock No.	Size (Spline/SAE)
SRES18	#18 - 9/16"
SRES20	#20 - 5/8"
SRES22	#22 - 11/16"
SRES24	#24 - 3/4"
SRES26	#26 - 13/16"
SRES28	#28 - 7/8"

3/4" Drive Ratchets and Accessories

Stock No.	Description	Catalog Page
L872	Ratchet Head	214
L872RJ	Knurled Ratchet Handle	214
L32	Extension - Lock Button - 3"	214
L62	Extension - Lock Button - 8"	214
L122	Extension - Lock Button - 16"	214
L82A	Universal Joint	215

3/4" Drive High Performance/Spline - Shallow Sockets, Page 216

Stock No.	Size (Spline/SAE)
LES242	#24 - 3/4"
LES302	#30 - 15/16"
LES342	#34 - 1 1/16"
LES362	#36 - 1 1/8"

3/4" Drive Shallow 12 Pt. Sockets, Page 215

Stock No.	Size (SAE)
LDH242	3/4"
LDH262	13/16"
LDH282	7/8"
LDH302	15/16"
LDH322	1"
LDH342	1 1/16"
LDH362	1 1/8"
LDH382	1 3/16"
LDH402	1 1/4"
LDH422A	1 5/16"
LDH442	1 3/8"
LDH462	1 7/16"
LDH482	1 1/2"
LDH502	1 9/16"
LDH522	1 5/8"
LDH542	1 11/16"
LDH562	1 3/4"

Flank Drive Plus® Combination Wrenches, Page 242

Stock No.	Size
SOEX8	1/4"
SOEX10	5/16"
SOEX11	1 1/32"
SOEX12	3/8"
SOEX14	7/16"
SOEX16	1/2"
SOEX18	9/16"
SOEX20	5/8"
SOEX22	11/16"
SOEX24	3/4"
SOEX26	13/16"
SOEX28	7/8"
SOEX30	15/16"
SOEX32	1"
SOEX34	1 1/16"
SOEX36	1 1/8"
SOEX38	1 3/16"
SOEX40	1 1/4"

Flank Drive Combination Wrenches, Page 244

Stock No.	Size
OEX8B	1/4"
OEX10B	5/16"
OEX11B	11/32"
OEX12B	3/8"
OEX14B	7/16"
OEX16B	1/2"
OEX18B	9/16"
OEX20B	5/8"
OEX22B	11/16"
OEX24B	3/4"
OEX26B	13/16"
OEX28B	7/8"
OEX30B	15/16"
OEX32B	1"
OEX34B	1 1/16"
OEX36B	1 1/8"
OEX38B	1 3/16"
OEX40B	1 1/4"

Conventional 12-point wrench and the contact it makes on the corner of a nut or bolt. The corner can round off under high loads causing the wrench to slip.

A Snap-on® Flank Drive® wrench moves the contact away from the corners with a radius, then provides flat-to-flat contact for up to 20% more turning power.

Box Wrench - Standard Length 12 Point - 10° Offset, Page 250

Stock No.	Size
XB1214A	3/8 - 7/16"
XB1416A	7/16 - 1/2"
XB1618A	1/2 - 9/16"
XB1820A	9/16 - 5/8"
XB2022A	5/8 - 11/16"
XB2224A	11/16 - 3/4"
XB2426A	3/4 - 13/16"
XB2830A	7/8 - 15/16"
XB3032A	15/16 - 1"

Box Wrench - High Performance - 12 Point - 15° Offset, Page 252

Stock No.	Size
XDH78A	7/32 - 1/4"
XDH810B	1/4 - 5/16"
XDH1012B	5/16 - 3/8"
XDH1214A	3/8 - 7/16"
XDH1416A	7/16 - 1/2"
XDH1618A	1/2 - 9/16"
XDH2226A	11/16 - 13/16"
XDH2528	25/32 - 7/8"

Box Wrench - High Performance/ Spline - 15° Offset, Page 253**

Stock No.	Size (Spline/SAE)
XDES810A	#8 / #10 - 1/4 / 5/16"
XDES1214A	#12 / #14 - 3/8 / 7/16"
XDES1618A	#16 / #18 - 1/2 / 9/16"
XDES1820A	#18 / #20 - 9/16 / 5/8"
XDES2224A	#22 / #24 - 11/16 / 3/4"

Box Wrench - Standard Length - 12 Point - Deep 60° Offset, Page 251

Stock No.	Size
XO810	1/4 - 5/16"
XO1012	5/16 - 3/8"
XO1214	3/8 - 7/16"
XO1618	1/2 - 9/16"
XO1820	9/16 - 5/8"
XO2022	5/8 - 11/16"
XO2024	5/8 - 3/4"
XO2226	11/16 - 13/16"
XO2428	3/4 - 7/16"

** Snap-on® spline wrenching tools have been developed to service high tensile strength spline nuts and bolts widely used on both military and commercial aircraft.

Precise, radial spline teeth engage the fastener teeth over a wider area to minimize stress, and allow application of high torque without damage to the fastener or to the tool.

Chrome spline tools comply with Military Spec. MS-33787 and MIL-W-8982. (Industrial finish tools comply with performance specifications and differ only in finish.) The unique patented spline wrenching configuration can also be used on ordinary 6 and 12-point fasteners with an advantage similar to the Snap-on Flank Drive® wrenching system.

⚠ WARNING

- Do not use chrome or industrial finish hand sockets with impact drivers
- Read safety precautions on pages W1 to W2

WERA

Insert Bits

Wera Tools. From Ideas.

Mplus Insert Bits

- Mplus for greater fracture torque and longer service life, tough viscous, ideal for hard screwdriving e.g. in metal sheet or structures
- Stock No. is for individual bits. Bits are available in pack quantity shown

Torq-set 1/4"

Stock No.	Description	Pack Qty
WER066618	1" x #0	10
WER066619	1" x #1	10
WER066620	1" x #2	10
WER066622	1" x #3	10
WER066624	1" x #4	10
WER066626	1" x #5	10
WER066628	1" x #6	10
WER066630	1" x #8	10
WER066632	1" x #10	10
WER066633	1" x 1/4"	10
WER066634	1 1/4" x 1/4"	10
WER066635	1 1/4" x 5/16"	10

Torq-set 5/16"

Stock No.	Description	Pack Qty
WER066650	1" x # 8	5
WER066652	1" x # 10	5
WER066654	1" x 1/4"	5
WER066656	1" x 5/16"	5
WER066658	1" x 3/8"	5

Torq-set Diamond-coated 1/4"

Stock No.	Description	Pack Qty
WER066640	1" x #6	10
WER066642	1" x #8	10
WER066644	1" x #10	10
WER066646	1 1/4" x 1/4"	10

Torq-set 5/16" Power Bit

Stock No.	Description	Pack Qty
WER066700	1 3/8" x #8	5
WER066702	1 3/8" x #10	5
WER066704	1 3/8" x 1/4"	5

Torq-set 7/16" Power Bit

Stock No.	Description	Pack Qty
WER066740	1 3/8" x 1/4"	5
WER066742	1 3/8" x 5/16"	5
WER066744	1 3/8" x 3/8"	5
WER066746	1 3/8" x 7/16"	5

Torq-set 1/4" Power Bit

Stock No.	Description	Pack Qty
WER066660	2" x #2	10
WER066683	3 1/2" x #2	5
WER066662	2" x #3	10
WER066684	3 1/2" x #3	5
WER066664	2" x #4	10
WER066685	3 1/2" x #4	5
WER066666	2" x #5	10
WER066668	2" x #6	10
WER066676	2 3/4" x #6	5
WER066686	3 1/2" x #6	10
WER066670	2" x #8	10
WER066678	2 3/4" x #8	5
WER066687	3 1/2" x #8	10
WER066672	2" x #10	10
WER066680	2 3/4" x #10	5
WER066682	3 1/2" x #10	5
WER066674	2" x 1/4"	10
WER221110	2" x 5/16"	10

Torq-set 5/8" Power Bit

Stock No.	Description	Pack Qty
WER066750	1 9/16" x 1/2"	5
WER066752	1 9/16" x 9/16"	5
WER066754	1 9/16" x 5/8"	5

"Harpoon" ACR 1/4" Power Bit (Boeing specification)

Stock No.	Description	Pack Qty
WER160901	PH 2 x 2"	10
WER160895	PH 2 x 2 3/4"	10
WER160908	PH 2 x 6"	10

- With reduced shaft, tough viscous, ideal for hard screwdriving e.g. in metal sheet or structures, ACR (Anti Cam-Out Ribs) prevents bit from slipping out

Reduced Tip 1/4" Power Bit (Boeing specification)

Stock No.	Description	Pack Qty
WER160899	PH 2 x 2"	10
WER160896	PH 2 x 6"	10

- With reduced shaft, tough viscous, ideal for hard screwdriving e.g. in metal sheet or structures

Stainless Steel Tools

- Keep rust at bay! Wera Stainless tools are made from 100% stainless steel,preventing extraneous rust caused by use of conventional tools contaminating stainless fasteners
- Wera's vacuum ice-hardned process gives the necessary hardness for industrial applications

Wera Koloss Ratchet with Hammer Function

Stock No.	Description
WER003692	Koloss ½" Drive Ratchet
WER003695	Extension
WER003696	Centering Pin
WER003697	Protective Pad Set

Wera Kraftform Kompakt 62

Stock No.	Description
WER059297	33 Piece Tamperproof Bitholding Screwdriver Set

7 Piece Insulated Set with Interchangable Blades

Stock No.	Description
WER003470	7 Piece KK VDE 60I/ 7 Set

18 Insulated Set with interchangable blades

Stock No.	Description
WER347163	18 Piece KK VDE 70i/62i/ 68i/ 18 Set

Hex Key Sets

Stock No.	Description
WER022721	950 PKL/9 SZ Hex Key Set, Imperial, BlackLaser
WER022720	3950 PKL/9 Hex Key Set, Metric, Stainless

Tool Sets

Stock No.	Description
WER071230	8 Piece Nutsetter Set, stainless steel, with retaining spring, belt pouch included
WER071118	22 Piece assorted Stainless tool set

Screwdriver Sets

Stock No.	Description
WER032060	6 piece Screwdriver Set - Slotted & Phillips
WER022728	6 piece VDE Screwdriver Set - Slotted & Pozidriv

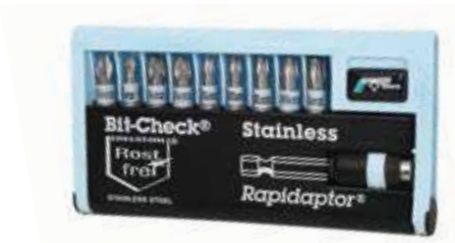

Bit Sets

Stock No.	Description
WER071112	10 Piece Stainless Steel Bit Set, includes Phillips, MM, Hex
WER071113	10 Piece Stainless Steel Bit Set, Includes Phillips, Torx
WER071117	17 Piece Stainless Steel Bitholding Screwdriver Set

⚠ WARNING

- Do not use chrome or industrial finish hand sockets with impact drivers
- Read safety precautions on pages W1 to W2

ZEPHYR

Bits & Fastener Tools

Torq-Set® Insert/Power Bits

Zephyr Torq-Set® bits are manufactured using the highest quality high carbon steel and heat treated to exacting standards to provide a maximum amount of torque to the fastener with a minimum of slippage or breakage.

ZEPTS212-8

Torq-Set Insert Bits – 1/4" Hex Shank

Stock No.	Screw Size	Overall Length
ZEPTS212-0	0	1"
ZEPTS2121	1	1"
ZEPTS2122	2	1"
ZEPTS2123	3	1"
ZEPTS2124	4	1"
ZEPTS2125	5	1"
ZEPTS2126	6	1"
ZEPTS212-8	8	1"
ZEPTS21210	10	1"
ZEPTS2121/4	.25	1"

ZEPZHTS-4

Hi-Torq® Driver Bits

"Hi-Torq" drivers are manufactured using the highest quality, high carbon steel and heat-treated to exacting standards to provide a maximum amount of torque to the fastener with a minimum of slippage or breakage. These bits are designed for high torque fastener installation and removal utilizing a square drive and detent pin drive system.

Stock No.	Drive S	Recess	Nom. Screw Size	T	D1	D	L
ZEPZHTS1	¼"	1	3, 4, 5, 6	.049"	.274"	½"	1"
ZEPZHTS-2	¼"	2	8	.059"	.295"	½"	1"
ZEPZHTS-3	¼"	3	10	.059"	.377"	½"	1"
ZEPZHTS-4	¼"	4	¼	.073"	.502"	½"	1"
ZEPZHTS-5	⅜"	5	5/16	.079"	.629"	¾"	1 ¼"
ZEPZHTS-6	⅜"	6	⅜	.095"	.745"	¾"	1 ¼"
ZEPZHTS-7	½"	7	7/16	.112"	.884"	1"	1 5/8"
ZEPZHTS-8	½"	8	½	.142"	.995"	1"	1 5/8"

* Conforms to MS33750

Frangible Collar Hi-Lok® Tools

ZEPQCK-4040

These tools are designed to install and remove frangible collar (castle nut) style Hi-Lok fasteners. Utilizing a two piece ratcheting tool, socket and pin combination system, they both hold the fastener body in place and rotate the collar to its predetermined torque shear load, breaking off the collar.

The removal tools also utilize the two piece ratchet system with a hex pin and a specialized socket containing eccentric rollers which, when rotated in the reverse rotation, cam into the body of the round collar allowing it to be rotated off the fastener body for removal.

ZEPQCK-4040 Hand installation and Removal Kit includes:
Hex Tip Pin sizes 1/16", 5/64", 3/32" and 1/8"
Socket Hex sizes 7/32", 1/4", 9/32", 5/16", 11/32", 3/8" and 7/16"
Removal Sockets in ranges of .235-.255, .245-.265, .255-.275, .265-.285, .275-.295, .285-.305, .295-.315, .305-.325, .315-.355, .325-.345, .335-.355, .355-.375, .375-.395, and .395-.415

Zephyr Torq-Set®-ACR® bits provide better "BITE." With better fit and purchase (surface contact area) they will deliver more torque!

ZEPTS170-8

Torq-Set Power Bits – 1/4" Hex Shank

Stock No.	Screw Size	Overall Length
ZEPTS1700	0	1.25"
ZEPTS1701	1	1.25"
ZEPTS1702	2	1.25"
ZEPTS1703	3	1.25"
ZEPTS1704	4	1.25"
ZEPTS1705	5	1.25"
ZEPTS1706	6	1.25"
ZEPTS1708	8	1.25"
ZEPTS17010	10	1.25"

ZEPZKLS-2

Kwik-Lok Temporary Kit

Zephyr temporary fasteners are designed to hold multiple pieces of material together temporarily during the assembly process via predrilled, undersize, holes and are designed with the highest quality materials to ensure proper material holding and long life.

ZEPZKLS-2 Kit includes: 1 pair of Kwik-Lok Pliers, 10 each temporary fasteners for hole sizes 3/32", 1/8", 5/32", 3/16" and 1/4" with a 0-½" grip range. Kit comes in a convenient plastic carrying case.

ZEP4000KIT

Jo-Bolt Blind Fastener Tools

These blind fasteners utilize a specialized thread drive pin assembly to tighten and secure the fastened assembly from one side, unlike a pull type or pintail blind fastener. This system uses two types of nose pieces – a flush nose with a taper and indexing groove and a protruding nose, with a standard hex socket configuration. The drivers utilize a two flat drive system and work with both the flush and protruding style noses to install these specialized fasteners.

ZEP4000KIT Visu-Lok/Composi-Lok Hand Installation Kit includes:
1 each HW300 Ratchet tool assembly
1 each LFVLG-1 Grip gauge
Fastener drivers in sizes -5, -6, -8, -10 and -12
Flush noses in sizes -5, -6, -8, -10 and -12
Reduced flush noses in sizes -5, -6, -8, -10 and -12
Protruding noses in sizes -5, -6, -8, -10 and -12
Millable noses in sizes -5, -6, -8, -10 and -12

Kit comes complete with a durable metal carrying case with a foam insert to hold tools properly in place.

ATI339EC

ATI339EC Threaded Shank 3 Jaw Chuck

- Drill bit capacity for 1/16" to 1/4"
- Allows use of standard straight shank bits in tools with threaded spindles
- Internal jaws are inverted for maximum chucking torque
- 1/4"-28 threaded shank

ATI503-40

ATI503-72

Threaded Shank Drill Adaptors

- Enables use of straight shank drill bits with threaded output angle drill attachments
- Retains drill bit with set screw
- 1/4"-28 threaded shank

Stock No.	Drill Size
ATI503-40	#40
ATI503-30	#30
ATI503-21	#21
ATI503-20	#20
ATI503-11	#11
ATI503-10	#10
ATI503-3	#3
ATI503-72	1/4
ATI503-73	5/16

ATI570-30

Drill Stops

- Controls hole depth and prevents chuck jaws from contacting drilled surface.
- Unit locks onto drill bit with a set screw.

Stock No.	Drill Size
ATI570-50	#50
ATI570-40	#40
ATI570-30	#30
ATI570-27	#27
ATI570-21	#21
ATI570-20	#20
ATI570-16	#16
ATI570-12	#12
ATI570-11	#11
ATI570-10	#10
ATI570-13/64	13/64
ATI5707/32	7/32
ATI570-1/4	1/4
ATI570-5/16	5/16

ATI503C-1/8

Threaded Shank Drill Collets

- Enables use of straight shank drill bits with threaded output angle drill attachments
- 1/4"-28 threaded shank

Stock No.	Drill Size
ATI503C-3/32	3/32
ATI503C-40	#40
ATI503C-1/8	1/8
ATI503C-30	#30
ATI503C-5/32	5/32
ATI503C-21	#21
ATI503C-20	#20
ATI503C-19	#19
ATI503C-16	#16
ATI503C-3/16	3/16
ATI503C-12	#12
ATI503C-11	#11
ATI503C-10	#10
ATI503C-7/32	7/32
ATI503C-1/4	1/4
ATI503C-F	F

ATIHSSSH3/16

Threaded Shank Drill Bits

- Made from HSS
- 1/4"-28 threaded shank

Stock No.	Drill Size	Length
ATIHSSST3/32	3/32	0.50
ATIHSSST40	#40	0.50
ATIHSSSH40	#40	1.00
ATIHSSST1/8	1/8	0.50
ATIHSSSH1/8	1/8	1.00
ATIHSSL1/8	1/8	2.13
ATIHSSST30	#30	0.56
ATIHSSH30	#30	1.25
ATIHSSL30	#30	2.13
ATIHSSST5/32	5/32	0.56
ATIHSSSH5/32	5/32	1.25
ATIHSSL5/32	5/32	2.13
ATIHSSST21	#21	0.56
ATIHSSST3/16	3/16	0.56
ATIHSSSH3/16	3/16	1.25
ATIHSSL3/16	3/16	2.13
ATIHSSST10	#10	0.56
ATIHSSH10	#10	1.25
ATIHSSST1/4	1/4	0.63
ATIHSSSH1/4	1/4	1.25
ATIHSSL1/4	1/4	2.13

WARNING

- Airframe tooling can cause flying chips
- Read safety precautions on pages W1 to W2

ATI TOOLS

Angle Drills and Attachments

ATI336A

Angle Drill Attachments

- Used for drilling holes in tight access areas
- Heavy duty gears and bearings
- ¼" shank for easy connection to drill motors
- Rated for 4500 RPM

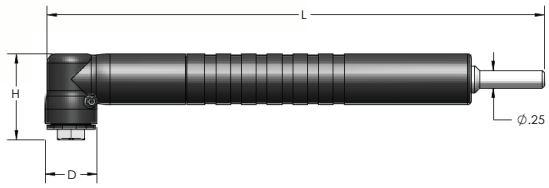

Stock No.	Type	Duty	Output Spindle	Length (in)	Head Height (in)	Head Diameter (in)
ATI326A	90° Direct Drive	Light	10-32	6.88	0.813	0.500
ATI327A18	90° Flex Drive	Light	10-32	18.00	0.813	0.500
ATI327A-24	90° Flex Drive	Light	10-32	24.00	0.813	0.500
ATI326B	90° Direct Drive	Light	¼"-28	6.88	0.813	0.500
ATI327B-12	90° Flex Drive	Light	¼"-28	12.00	0.813	0.500
ATI327B18	90° Flex Drive	Light	¼"-28	18.00	0.813	0.500
ATI327B-24	90° Flex Drive	Light	¼"-28	24.00	0.813	0.500
ATI300B	90° Direct Drive	Standard	¼"-28	6.00	1.625	0.813
ATI302B	90° Flex Drive	Standard	¼"-28	30.00	1.625	0.813
ATI301B	45° Direct Drive	Standard	¼"-28	6.69	1.000	0.813
ATI303B	45° Flex Drive	Standard	¼"-28	30.00	1.000	0.813
ATI336A	90° Direct Drive	Heavy	CHUCK	6.25	1.438	1.000
ATI338A	90° Flex Drive	Heavy	CHUCK	30.00	1.438	1.000
ATI336B	90° Direct Drive	Heavy	¼"-28	6.25	1.438	1.000
ATI338B	90° Flex Drive	Heavy	¼"-28	30.00	1.438	1.000
ATI337A	360° Direct Drive	Heavy	CHUCK	6.00	1.438	1.000
ATI339A	360° Flex Drive	Heavy	CHUCK	30.00	1.438	1.000
ATI337B	360° Direct Drive	Heavy	¼"-28	6.00	1.438	1.000
ATI339B	360° Flex Drive	Heavy	¼"-28	30.00	1.438	1.000

ATI331B

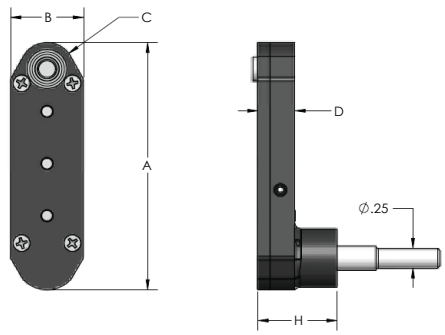

Offset Angle Drills

- Offset drive enables drilling in tight access areas
- 1/4'' round shank

Stock No.	Type	Speed	Spindle	Height (H) (in)	Length (A) (in)	Width (B) (in)	Thickness (D) (in)	Radius C
ATI313A	Straight Offset	6000	10-32	4.31	4.35	0.875	0.290	0.42
ATI313B	Straight Offset	6000	¼"-28	4.31	4.35	0.875	0.290	0.42
ATI313LA	30° Left Hand Offset	6000	10-32	4.31	4.00	0.875	0.290	0.42
ATI313LB	30° Left Hand Offset	6000	¼"-28	4.31	4.00	0.875	0.290	0.42
ATI313RA	30° Right Hand Offset	6000	10-32	4.31	4.00	0.875	0.290	0.42
ATI313RB	30° Right Hand Offset	6000	¼"-28	4.31	4.00	0.875	0.290	0.42
ATI331A	Straight Offset	6000	10-32	4.38	4.19	0.921	0.438	0.44
ATI331B	Straight Offset	6000	¼"-28	4.38	4.19	0.921	0.438	0.44
ATI332A	Straight Offset	4200	10-32	1.50	3.17	0.920	0.370	0.34
ATI332B	Straight Offset	4200	¼"-28	1.50	3.17	0.920	0.370	0.34
ATI332SC	Straight Offset	4200	¼"-28	1.50	3.12	0.920	0.320	0.31
ATI333B	Straight Offset, Reversed	4200	¼"-28	1.50	3.18	0.960	0.500	0.32

Drill Guides, Housings and Bushings

- Maintains tool perpendicular to flat or curved surfaces
- Used with drills, taps or reamers
- Case hardened bushings are interchangeable in housings
- Housings provide ample relief for chips under the bushing
- Guide assemblies consist of housing with bushing installed
- Threaded interface allows interchangeability of bushings and housings

DRILL GUIDE HOUSINGS		
Stock No.	**Description**	**Bushing Reference**
ATI589AA	Threaded drill guide housing Drill sizes #40 (.098) Thru 5/16" (.3125)	ATI589AB-series 1/2"-13
ATI589CA	Threaded drill guide housing new configuration is larger allowing easier access to change bushings while providing better hand protection & larger grip area Drill sizes 1/4" (.250) Thru 9/16" (.5625)	ATI589CB-series 3/4"-16
ATI589CAM	Threaded drill guide housing Drill sizes 1/4" (.250) Thru 9/16" (.5625)	ATI589CB-series 3/4"-16
ATI589DA	Flange lock drill guide housing Drill sizes #80 (.0135) Thru #10 (.1935)	Slip Renewable 5/16" OD x 3/4" Long
ATI589EA	Flange lock drill guide housing Drill sizes #28 (.1405) Thru 11/32" (.3438)	Slip Renewable 1/2" OD x 3/4" Long

DRILL GUIDE ASSEMBLIES AND BUSHINGS			
Drill Guide Assemblies Stock No.	**Drill Bushing Stock No.**	**Drill Size**	**Bushing Size**
ATI589A-098	**ATI589AB098**	#40	1/2"-13
ATI589A-1285	**ATI589AB1285**	#30	1/2"-13
ATI589A-1562	**ATI589AB1562**	05.01.32	1/2"-13
ATI589A-159	**ATI589AB159**	#21	1/2"-13
ATI589A161	**ATI589AB-161**	#20	1/2"-13
ATI589A-1875	**ATI589AB1875**	3/16"	1/2"-13
ATI589A-1935	**ATI589AB1935**	#10	1/2"-13
ATI589A2187	**ATI589AB2187**	7/32"	1/2"-13
ATI589A250	**ATI589A250**	1/4" or E	1/2"-13
ATI589A257	**ATI589AB-257**	F	1/2"-13

Strap Duplicators

- Provide an accurate method for duplicating hidden holes in overlapping sheets.
- Standard pilots are used when sheets can be pried apart. Inverted pilots are used when sheets cannot be separated. Spring loaded center punch allows for marking in limited access for drilling latter.

Position pilot in hole to be duplicated then drill through bushing. Back side of pilot is relieved to allow drill to pass through 1st sheet only; straps are spring steel, bushings, pilots and center punch are hardened drill rod assuring accurate hole duplication. Tools are identified with Stock No. and drill size. Working length is shown, maximum distance from edge of sheet to hole. Back side of strap is beveled to aid in prying sheets apart.

ATI590DBK

ATI589AB1935

ATI589A2187

DRILL BUSHING KITS		
Stock No.	**Description**	**Bushing Size**
ATI590DBK	Three Guide Housings and nine drill bushings, sizes #40, #30, 5/32", #21, 3/16", #10, 7/32", 1/4"	1/2"-13

DRILL GUIDE ASSEMBLIES AND BUSHINGS			
Drill Guide Assemblies Stock No.	**Drill Bushing Stock No.**	**Drill Size**	**Bushing Size**
ATI589C-2812	**ATI589CB2812**	9/32	3/4"-16
ATI589C.3125	**ATI589CB3125**	5/16	3/4"-16
ATI589C-3437	**ATI589CB3437**	11/32	3/4"-16
ATI589C-375	**ATI589CB375**	3/8	3/4"-16
ATI589C-4375	**ATI589CB4375**	7/16	3/4"-16
ATI589C-.500	**ATI589CB500**	1/2	3/4"-16

ATI532-61

Drill Size	Type	6-1/4" LengthStock No.	13-1/4" LengthStock No.
#40	Bushing, Standard Pilot	**ATI532-61**	**ATI532C-61**
#30	Bushing, Standard Pilot	**ATI532-62**	**ATI532C-62**
#21	Bushing, Standard Pilot	**ATI532-63**	**ATI532C-63**
#10	Bushing, Standard Pilot	**ATI532-65**	**ATI532C-65**
1/4"	Bushing, Standard Pilot	**ATI532-68**	**ATI532C-68**
#40	Bushing, Inverted Pilot	**ATI532A-61**	**ATI532D-61**
#30	Bushing, Inverted Pilot	**ATI532A-62**	**ATI532D-62**
#21	Bushing, Inverted Pilot	**ATI532A-63**	**ATI532D-63**
#10	Bushing, Inverted Pilot	**ATI532A-65**	**ATI532D-65**
1/4"	Bushing, Inverted Pilot	**ATI532A-68**	**ATI532D-68**

Drill Size	Type	6-1/4" LengthStock No.
#40	Spring Loaded Center Punch	**ATI500-51**
#30	Spring Loaded Center Punch	**ATI500-52**
#21	Spring Loaded Center Punch	**ATI500-53**
#10	Spring Loaded Center Punch	**ATI50055**

STRAP DUPLICATORS SETS		
ATI532/A/SET	10 Piece Set Standard & Inverted Pilot	Includes Items In Blue

⚠ WARNING

- Airframe tooling can cause flying chips
- Read safety precautions on pages W1 to W4

ATI TOOLS

Speed Driver, Deburring Tools and Cutters

- 'Speed Driver' an ATI original, with swivel handle and unique offset shaft allows for rapid, uniform and safe deburring of drilled holes.

Stock No.	Description
ATI521A	Speed driver, used with ATI521C deburring cutter. Tool has a taper lock spindle and only accepts this cutter
ATI521B	Speed driver, used with ATI407-4 deburr/countersink cutter. Accepts any ¼"-28 threaded shank cutters.

Stock No.	Description
ATI521C	Deburring Cutter, 100-Degree Cutting Angle, 3-Flute, ⅜ Body, 7⁄32 Shank Diameter
ATI407-4	Countersink cutter, 100-degree cutting angle, 3-flute, ⅜" body, ¼"-28 threaded shank. Can be used in any drill attachment that accepts ¼"-28 threaded shank cutters.

Carbide Deburring Blade

- Carbide deburring blades last longer than HSS and perform better on harder materials.
- 3 Piece Kit features all 3 blade styles.

3 Piece Kit	Square Blade	Inside Blade	Outside Blade
ATI437C	ATI437C-1	ATI437C-2	ATI437C-3

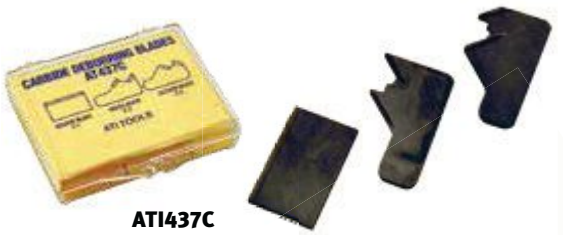

Chip Chasers

- Designed to remove chips that accumulate between sheet stock after drilling rivet holes.
- Blades are made from clock spring steel

Stock No.	Description
ATI511	Chip Chaser-Bright Plastic Molded Handle Blunt Hook, 2-¾" Length Blade
ATI512	Chip Chaser-Bright Plastic Molded Handle Blunt Hook, 5-⅞" Length Blade

Chip Chaser Assemblies

CHIP CHASER ASSEMBLIES	
ATISP200-1	Chip Chaser Assembly-Cast Aluminum Handle Accepts Replaceable Blades. Point Hook, 5-⅞" Length Blade
ATISP200-2	Chip Chaser Assembly-Cast Aluminum Handle Accepts Replaceable Blades. Point Hook, 5-⅞" Length Blade
ATISP200-3	Chip Chaser Assembly-Cast Aluminum Handle Accepts Replaceable Blades. Point Hook, 2-¾" Length Blade

Chip Chaser Components

Stock No.	Description
ATISP200	Chip Chaser Handle Only Accepts Replaceable Blades Listed Below
ATISP20002	Replaceable Blade Point Hook, 5-⅞" Length Blade
ATISP20003	Replaceable Blade Blunt Hook, 5-⅞" Length Blade
ATISP20004	Replaceable Blade Point Hook, 2-¾" Length Blade

Edge Breakers

- Quickly removes burrs & sharp edges from sheet stock.

Stock No.	Description
ATI514	Hardened tip, safety shield and plastic handle works well on aluminum sheet stock
ATISP225	Cast aluminum body with molded thumb rest safety guard. Uses standard triangle indexable carbide inserts. Quickly removes burrs & sharp edges from all types of sheet stock from aluminum to stainless steel

Nut Plate Drill Jigs

- Used for accurate drilling of rivet holes for nut plate fasteners.
- Flexible handle provides clearance for hand during use
- Hardened steel head for durability.

Stock No.	Type	A Spacing	B Spacing	C Pilot Diameter	D Drill Size
ATI518G	SWS	0.344	N/A	0.139	#40
ATI518H	SWS	0.344	N/A	0.164	#40
ATI518J	SWS	0.344	N/A	0.191	#40
ATI518K	SWS	0.344	N/A	0.248	#40
ATI518RF	SWS	0.500	N/A	0.2555	#40
ATI518RH	SWS	0.500	N/A	0.373	#30
ATI518RM	SWS	0.344	N/A	0.1875	#40
ATI518RO	SWS	0.500	N/A	0.248	#40
ATI518RP	SWS	0.500	N/A	0.3105	#30
ATI518PB	SWM	0.218	N/A	0.139	#40
ATI518PC	SWM	0.234	N/A	0.164	#40
ATI518PD	SWM	0.250	N/A	0.191	#40
ATI518PE	SWM	0.281	N/A	0.248	#40
ATI518A	DWS	0.344	0.688	0.139	#40
ATI518B	DWS	0.344	0.688	0.164	#40
ATI518C	DWS	0.344	0.688	0.191	#40
ATI518D	DWS	0.500	1.000	0.248	#40
ATI518E	DWS	0.500	1.000	0.312	#30
ATI518F	DWS	0.500	1.000	0.372	#30
ATI518GL	DWS	0.344	0.688	0.218	#40
ATI518HO	DWS	0.375	0.750	0.248	#40
ATI518KD	DWS	0.344	0.688	0.192	#40
ATI518KL	DWS	0.344	0.688	0.1875	#40
ATI518KN	DWS	0.500	1.000	0.3105	#30
ATI518KU	DWS	0.344	0.688	0.2555	#40
ATI518N	DWS	0.500	1.000	0.6875	#30
ATI518AB	DWM	0.2185	0.437	0.166	#40
ATI518AD	DWM	0.250	0.500	0.218	#40
ATI518AE	DWM	0.281	0.562	0.281	#40
ATI518NA	DWM	0.203	0.406	0.112	#40
ATI518NB	DWM	0.218	0.436	0.139	#40
ATI518NC	DWM	0.234	0.468	0.164	#40
ATI518ND	DWM	0.250	0.500	0.191	#40
ATI518NE	DWM	0.2871	0.562	0.284	#40
ATI518NJ	DWM	0.250	0.500	0.1875	#40
ATI518-ML	CWS	0.344	N/A	0.1875	#40
ATI518MN	CWS	0.50	N/A	0.311	#30
ATI518S	CWS	0.344	N/A	0.164	#40
ATI518T	CWS	0.344	N/A	0.191	#40
ATI518U	CWS	0.50	N/A	0.248	#40
ATI518SA	CWM	0.203	N/A	0.112	#40
ATI518SB	CWM	0.218	N/A	0.139	#40
ATI518SC	CWM	0.234	N/A	0.164	#40
ATI518SD	CWM	0.250	N/A	0.191	#40
ATI518SE	CWM	0.281	N/A	0.248	#40
ATI518NASDA8	SLM	0.234	0.219	0.164	#40
ATI518TA	SLM	0.250	0.219	0.191	#40
ATI518TB	SLM	0.281	0.219	0.248	#40

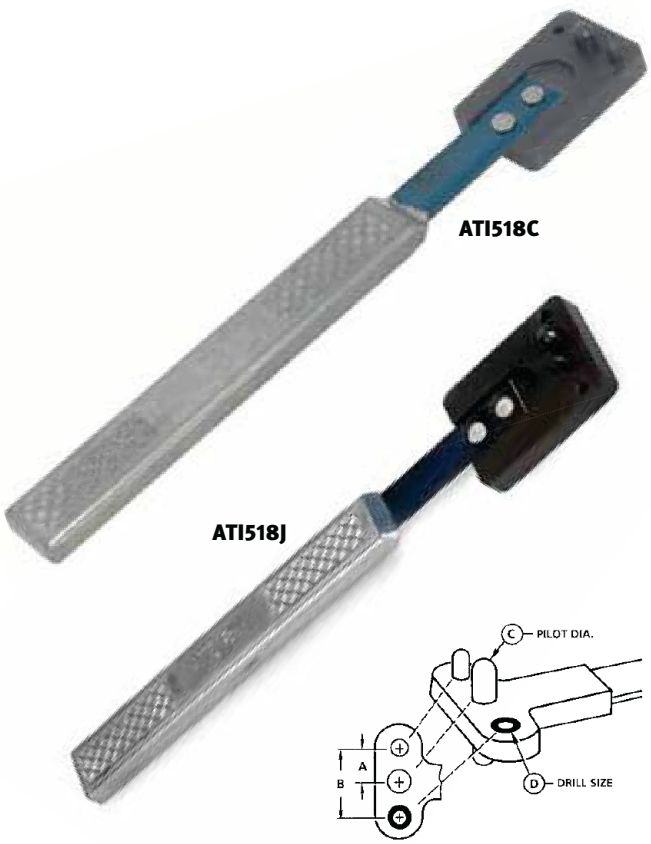

ATI507KT

ATI507KT Duplicating Punch Kit

- Accurately duplicate hole location from one sheet to another.
- Heat treated and ground punch tips and locating diameters are held to tight concentricity.
- Kit contains fourteen 3-½'' OAL punches, sizes 3/32'', #40, 1/8'', #30, 5/32'', #19, 3/16'', #10, 7/32'', 1/4'', 5/16'', 3/8'', 7/16'', and 1/2''

WARNING

- Airframe tooling can cause flying chips
- Read safety precautions on pages W1 to W2

ATI TOOLS

Hole Saws and Arbors

Hole Saws

- ATI precision hole saws are manufactured from high speed tool steel.
- Hole saws are heat treated and ground to precise tolerances.
- Hole saw design allows for resharpening of tool.
- Use with ATI415 Hole Saw Arbors.

ATI413-2

ATI474-15

FINE TOOTH		
Stock No.	Diameter in.	Thread
ATI413-1	3/8	5/16"-24
ATI413-2	7/16	5/16"-24
ATI4132X	15/32	5/16"-24
ATI413-3	1/2	5/16"-24
ATI413-4	9/16	5/16"-24
ATI413-5	5/8	5/16"-24
ATI4135X	21/32	5/16"-24
ATI4136	11/16	5/16"-24
ATI413-7	3/4	5/16"-24
ATI413-8	13/16	5/16"-24
ATI413-9	7/8	5/16"-24
ATI413-11	1	5/16"-24
ATI413-12	1 1/16	5/16"-24
ATI413-13	1 1/8	5/16"-24
ATI413-15	1 1/4	5/16"-24
ATI41319	1 1/2	1/2"-20
ATI413-21	1 5/8	1/2"-20
ATI41323	1 3/4	1/2"-20
ATI413-27	2	1/2"-20
ATI413-31	2 1/4	1/2"-20
ATI413-47	3 1/4	1/2"-20
ATI413-51	3 1/2	1/2"-20

COARSE TOOTH								
Stock No.	Diameter in.	Thread	Stock No.	Diameter in.	Thread	Stock No.	Diameter in.	Thread
ATI474-1	3/8	5/16"-24	ATI474-12	1 1/16	5/16"-24	ATI474-27	2	1/2"-20
ATI474-1X	13/32	5/16"-24	ATI47412X	1 3/32	5/16"-24	ATI474-29	2 1/8	1/2"-20
ATI474-2	7/16	5/16"-24	ATI474-13	1 1/8	5/16"-24	ATI474-30	2 3/16	1/2"-20
ATI474-2X	15/32	5/16"-24	ATI474-14	1 3/16	5/16"-24	ATI474-31	2 1/4	1/2"-20
ATI474-3	1/2	5/16"-24	ATI47414X	1 7/32	5/16"-24	ATI474-32	2 5/16	1/2"-20
ATI4743X	17/32	5/16"-24	ATI474-15	1 1/4	5/16"-24	ATI474-33	2 3/8	1/2"-20
ATI474-4	9/16	5/16"-24	ATI474-16	1 5/16	1/2"-20	ATI47434	2 7/16	1/2"-20
ATI474-4X	19/32	5/16"-24	ATI474-17	1 3/8	1/2"-20	ATI474-35	2 1/2	1/2"-20
ATI474-5	5/8	5/16"-24	ATI474-18	1 7/16	1/2"-20	ATI47436	2 9/16	1/2"-20
ATI474-5X	21/32	5/16"-24	ATI474-18X	1 15/32	1/2"-20	ATI474-38	2 11/16	1/2"-20
ATI474-6	11/16	5/16"-24	ATI474-19	1 1/2	1/2"-20	ATI474-39	2 3/4	1/2"-20
ATI4746X	23/32	5/16"-24	ATI474-20	1 9/16	1/2"-20	ATI474-40	2 13/16	1/2"-20
ATI474-7	3/4	5/16"-24	ATI47420X	1 19/32	1/2"-20	ATI474-41	2 7/8	1/2"-20
ATI474-7X	25/32	5/16"-24	ATI474-21	1 5/8	1/2"-20	ATI474-42	2 15/16	1/2"-20
ATI474-8	13/16	5/16"-24	ATI47421X	1 21/32	1/2"-20	ATI474-43	3	1/2"-20
ATI474-8X	27/32	5/16"-24	ATI474-22	1 11/16	1/2"-20	ATI47444	3 1/16	1/2"-20
ATI474-9	7/8	5/16"-24	ATI47422X	1 23/32	1/2"-20	ATI474-47	3 1/4	1/2"-20
ATI4749X	29/32	5/16"-24	ATI474-23	1 3/4	1/2"-20	ATI474-48X	3 11/32	1/2"-20
ATI474-10	15/16	5/16"-24	ATI474-24	1 13/16	1/2"-20	ATI47449	3 3/8	1/2"-20
ATI474-10X	31/32	5/16"-24	ATI474-25	1 7/8	1/2"-20	ATI47454	3 11/16	1/2"-20
ATI474-11	1	5/16"-24	ATI474-26	1 15/16	1/2"-20	ATI474-55	3 3/4	1/2"-20
ATI47411X	1 1/32	5/16"-24	ATI474-26X	1 31/32	1/2"-20	ATI474-59	4	1/2"-20

Hole saw Arbors

- Pilot and shank are ground to ensure tight concentricity.
- Use with ATI413 and ATI474 hole saws.

Stock No.	Shank Diameter	Pilot Diameter	Thread
ATI415-0	1/4	3/16	5/16"-24
ATI415-1	1/4	1/4	5/16"-24
ATI415-2	1/2	1/4	1/2"-20
ATI415-3	1/2	3/8	1/2"-20
ATI415-10	1/4	1/4	1/2"-20

ATI415-1

Counterbores

- Aircraft style, straight shank counterbores are used to cut flat areas or recesses for bolt heads and nuts.
- Use with ATI489 replaceable counterbore pilots.
- A set screw ensures pilot stays in the counterbore.
- Special corner radius available by request

ATI488C-21

Stock No.	Diameter	Pilot Hole Diameter	Shank Diameter
ATI488C-0	3/16	3/32	1/4
ATI488C-1	1/4	3/32	1/4
ATI488C-2	9/32	3/32	1/4
ATI488C-3	5/16	3/32	1/4
ATI488C-4	11/32	3/32	1/4
ATI488C-5	3/8	1/8	1/4
ATI488C-6	13/32	1/8	1/4
ATI488C-7	7/16	1/8	1/4
ATI488C-8	15/32	1/8	1/4
ATI488C-9	1/2	1/8	1/4
ATI488C-10	17/32	1/8	1/4
ATI488C-11	9/16	1/8	1/4
ATI488C-12	19/32	1/8	1/4
ATI488C-13	5/8	1/8	1/4
ATI488C-14	21/32	3/16	1/4
ATI488C-15	11/16	3/16	1/4
ATI488C-16	23/32	3/16	1/4

Stock No.	Diameter	Pilot Hole Diameter	Shank Diameter
ATI488C-17	3/4	3/16	1/4
ATI488C-18	25/32	3/16	1/4
ATI488C-19	13/16	3/16	1/4
ATI488C-20	27/32	3/16	1/4
ATI488C-21	7/8	3/16	1/4
ATI488C-22	29/32	3/16	1/4
ATI488C-23	15/16	3/16	1/4
ATI488C-24	31/32	3/16	1/4
ATI488C-25	1	3/16	1/4
ATI488C-26	1 1/16	3/16	3/8
ATI488C-27	1 1/8	3/16	3/8
ATI488C-28	1 3/16	3/16	3/8
ATI488C-29	1 1/4	3/16	3/8
ATI488C-30	1 5/16	3/16	3/8
ATI488C-31	1 3/8	3/16	3/8
ATI488C-32	1 1/2	3/16	3/8

Counterbore Pilots

- Use these pilots with ATI488C counterbores.
- Match the shank diameter of the pilot to the pilot hole diameter of the counterbore.

ATI489B-8

		Pilot Diameter												
		3/32	1/8	5/32	#21	3/16	#10	7/32	1/4	F	9/32	5/16	11/32	3/8
Shank Diameter	3/32	ATI489A-1	ATI489A-2	ATI489A-3	ATI489A-4	ATI489A-5	ATI489A-6	ATI489A-7	ATI489A-8	ATI489A-9	ATI489A-10	ATI489A-11		
	1/8		ATI489B-2	ATI489B-3	ATI489B-4	ATI489B-5	ATI489B-6	ATI489B-7	ATI489B-8	ATI489B-9	ATI489B-10	ATI489B-11	ATI489B-12	ATI489B-13
	3/16					ATI489C-5	ATI489C-6	ATI489C7	ATI489C-8	ATI489C-9	ATI489C10	ATI489C-11	ATI489C-12	ATI489C-13

Dimple Dies

- Dimple Dies are made from heat treated tool steel, ground, and polished.
- For AN426 rivets.
- Shank diameter is 3/16" and features a spring clip to keep dies in place during use.

ATI206A-6-R

ATI207A-5-R

Rivet Size		3/32			1/8			5/32		
Type		Male	Female	Male & Female	Male	Female	Male & Female	Male	Female	Male & Female
Body Length	1/4	ATI206A-3-P	ATI207A-3-P	ATI207206A3P	ATI206A-4-P	ATI207A-4-P	ATI207206A4P	ATI206A-5-P	ATI207A-5-P	ATI207206A5P
	3/8	ATI206A-3-R	ATI207A-3-R	ATI207206A3R	ATI206A-4-R	ATI207A-4-R	ATI207206A4R	ATI206A-5-R	ATI207A-5-R	ATI207206A5R
	1/2	ATI206A-3-S	ATI207A-3-S	ATI207206A3S	ATI206A-4-S	ATI207A-4-S	ATI207206A4S	ATI206A-5-S	ATI207A-5-S	
	5/8	ATI206A-3-T	ATI207A-3-T							

Rivet Size		3/16			1/4	
Type		Male	Female	Male & Female	Male	Female
Body Length	1/4	ATI206A-6-P	ATI207A-6-P	ATI207206A6P	ATI206A-8-P	ATI207A-8-P
	3/8	ATI206A-6-R	ATI207A-6-R	ATI207206A6R	ATI206A-8-R	ATI207A-8-R
	1/2	ATI206A-6-S	ATI207A-6-S	ATI207206A6S		
	5/8					

Included in 24 Piece Kit

ATI206A-24PC

ATI206A-24PC Dimple Die Kit

- Kit contains 24 male and female dimple dies for use with hand and stationary rivet squeezers.
- Dies contained in a sturdy, tool control style box.

WARNING

- Airframe tooling can cause flying chips
- Read safety precautions on pages W1 to W2

ATI TOOLS

Microstops

cutaway picture shown

ATI444 Microstops

- For high volume, accurate countersinking in a production environment.
- Full ball bearing shaft support for increased life.
- Heavy duty ball thrust bearing ensures depth repeatability.
- Fail-safe design accomplished with integrated shoulder on shaft.
- Debris filter prevents chips and dust from contaminating bearings.
- .0005" depth adjustment, 5/16" shaft travel.
- Right-hand threaded lock nut prevents jamming of adjustment mechanism.
- Multiple skirt configuration options.
- Multiple shaft configuration options.

cutaway picture shown

ATI443 Microstops

- For lower volume countersinking in maintenance and home-build environments.
- Bronze bushing shaft support.
- Heavy duty ball thrust bearing ensures depth repeatability.
- Fail-safe design accomplished with integrated shoulder on shaft.
- .0005" depth adjustment, 5/16" shaft travel.
- Right-hand threaded lock nut prevents jamming of adjustment mechanism.
- Multiple skirt configuration options.
- Multiple shaft configuration options.

Skirts:					
	S Straight ¾" Capacity		C Close 5⁄16" Capacity		H Nylon Flange Insert ¾" Capacity
				Extended Skirts: 2-¾" Extension Includes extension shaft	
	E Straight Cutaway ¾" Capacity		D Bell 1" Capacity		LA 10-32 Female Thread ¼ ID x ⅜ OD
	F Flanged ¾" Capacity		W Flanged Bell 1" Capacity		LB ¼-28 Female Thread 5⁄16 ID x 7⁄16 OD
	G Flanged Cutaway ¾" Capacity		J .532 OD .332 Capacity		LC ¼-28 Female Thread ⅜ ID x ½ OD
	B 2-Legged ¾" Capacity		K .600 OD .400 Capacity		LD ¼-28 Female Thread ⅝ ID x ¾ OD
	A Phenolic Insert ¾" Capacity		N Nylon Insert ¾" Capacity		

SHAFTS: All shafts feature wrenching flats to aid in removal of cutter after use.	
	1 ¼"-28 Female Thread ¼ Round Shank
	2 ¼"-28 Female Thread 3 Chuck Flats Shank
	3 ¼"-28 Female Thread Quick Change Shank
	4 M6 Female Thread ¼ Round Shank
	5 M6 Female Thread 3 Chuck Flats Shank

ORDERING: Choose either ATI444 or ATI443, Skirt Option, and Shaft Option!						
	Stock No.	**Model**	**+**	**Skirt**	**+**	**Shaft**
Ex.	**ATI444G2**	ATI444	+	G	+	2
Ex.	**ATI444LA4**	ATI444	+	LA	+	4
Ex.	**ATI443S1**	ATI443	+	S	+	1
Ex.	**ATI443A2**	ATI443	+	A	+	2

ATI432A

ATI462H3-1.3

Jumbo Size Microstops

- For production environment countersinking of larger sized holes.
- Fail-safe design accomplished with integrated shoulder on shaft.
- All shafts feature wrenching flats to aid in removal of cutter after use.
- 3/4" shaft travel.
- Ball thrust bearing ensures depth repeatability.

Stock No.	Shaft Thread	Shaft Support	Adjustment Increment	Cutter Capacity	Shank	OAL
ATI432A	7⁄16"-20 Female	Bronze Bushing	.001	1-¼"	⅜" Round	7"
ATI432B	⅜"-24 Female	Bronze Bushing	.001	1-¼"	⅜" Round	7"
ATI462	⅜"-24 Female	Bronze Bushing	.003	⅞"	⅜" Round	5"
ATI462H3-1.3	⅜"-24 Female	Ball Bearing	.0005	1-¼"	3 Chuck Flats	5"
ATI462H3-1.5	⅜"-24 Female	Ball Bearing	.0005	1-⅜"	3 Chuck Flats	5"
ATI462H7-1.3	7⁄16"-20 Female	Ball Bearing	.0005	1-¼"	3 Chuck Flats	5"
ATI462H7-1.5	7⁄16"-20 Female	Ball Bearing	.0005	1-⅜"	3 Chuck Flats	5"

ATI590CSK Microstop/Countersink Kit

- Provides countersinking versatility.
- Includes one high-speed standard size ATI Microstop for precise, accurate countersinking.
- Includes an assortment of popular skirt and nose piece configurations.
- Includes nine 1/2'' diameter, 100° cutters with pilots of #40, #30, #21, #10, 3/32'', 1/8'', 5/32'', 3/16'', and 1/4''

Countersink Cutters, Threaded Shank

- Manufactured of M2 High-Speed Steel Or Carbide-Tipped
- High Speed Steel Countersinks Ground On-Centers To Insure Concentricity
- 120-Degree Seating Angle For Standard Fit
- Used With ATI443 Or ATI444 Series Microstops

Integral-Pilot Countersink Cutter, High Speed Steel, 1/4-28 Threads					
3 Flutes, 100° Stock No.	Body Diameter	Pilot Size	2 Flutes, 100° Stock No.	Body Diameter	Pilot Size
ATI420C4332	3/8"	3/32"	ATI445E43/32	1/2"	3/32"
ATI420C440	3/8"	#40	ATI445E440	1/2"	#40
ATI420C418	3/8"	1/8"	ATI445E41/8	1/2"	1/8"
ATI420C430	3/8"	#30	ATI445E430	1/2"	#30
ATI420C45/32	3/8"	5/32"	ATI445E45/32	1/2"	5/32"
ATI420C421	3/8"	#21	ATI445E421	1/2"	#21
ATI420C413	3/8"	#13	ATI445E420	1/2"	#20
ATI420C4316	3/8"	3/16"	ATI445E416	1/2"	#16
ATI420C410	3/8"	#10	ATI445E413	1/2"	#13
ATI420C41/4	3/8"	1/4"	ATI445E43/16	1/2"	3/16"
ATI420D43/32	7/16"	3/32"	ATI445E4-11	1/2"	#11
ATI420D440	7/16"	#40	ATI445E410	1/2"	#10
ATI420D41/8	7/16"	1/8"	ATI445E4-1/4	1/2"	1/4"
ATI420D430	7/16"	#30	ATI445E47/32	1/2"	7/32"
ATI420D45/32	7/16"	5/32"	ATI445G430	5/8"	#30
ATI420D421	7/16"	#21	ATI445G41/4	5/8"	1/4"
ATI420D420	7/16"	#20	ATI445G45/16	5/8"	5/16"
ATI420D416	7/16"	#16			
ATI420D413	7/16"	#13			
ATI420D43/16	7/16"	3/16"			
ATI420D410	7/16"	#10			
ATI420D41/4	7/16"	1/4"			
ATI420D47/32	7/16"	7/32"			
ATI420G43/16	5/8"	3/16"			
ATI420G4-1/4	5/8"	1/4"			
ATI420G45/16	5/8"	5/16"			

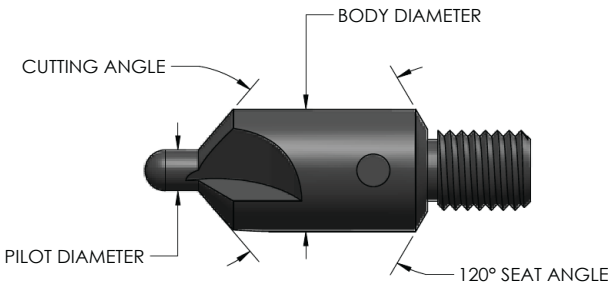

ATI445E421 Shown

WARNING

- Airframe tooling can cause flying chips
- Read safety precautions on pages W1 to W2

ATI TOOLS

Countersink Cutters

INTEGRAL-PILOT COUNTERSINK CUTTER, CARBIDE-TIPPED, ¼"-28 THREADS		
2 Flutes, 100° Stock No.	Body Diameter	Pilot Size
ATI445CE4332	½"	3/32"
ATI445CE440N	½"	#40
ATI445CTE418	½"	1/8"
ATI445CTE430	½"	#30
ATI445CE4532	½"	5/32"
ATI445CTE421	½"	#21
ATI445CE4316	½"	3/16"
ATI445CTE410	½"	#10
ATI445CTE414	½"	¼"
ATI445CG414	⅝"	¼"
ATI445CG4516	⅝"	5/16"

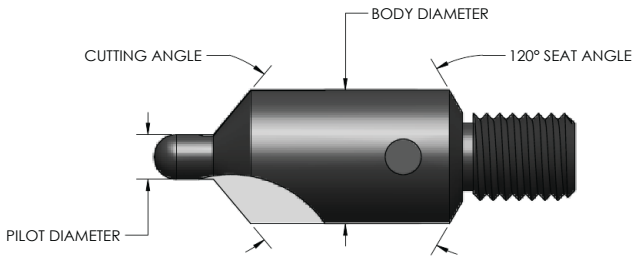

REPLACEABLE-PILOT COUNTERSINK CUTTER, HSS, ¼"-28 THREADS			
2 Flutes, 100° Stock No.	Body Diameter	Pilot Hole	Pilot Series
ATI455A-4	¼"	.086	ATI484-
ATI455B-4	5/16"	.086	ATI484-
ATI455C-4	⅜"	.086	ATI484-
ATI455D-4	7/16"	.086	ATI484-
ATI455E-4	½"	.086	ATI484-
ATI455G-4	⅝"	.086	ATI484-

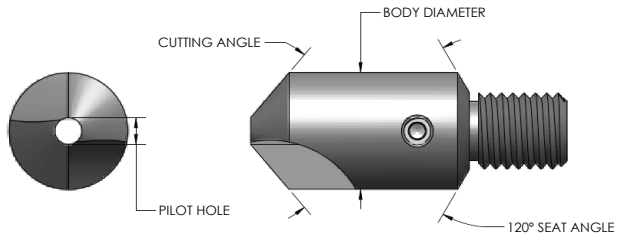

REPLACEABLE-PILOT COUNTERSINK CUTTER, CARBIDE-TIPPED, ¼"-28 THREADS			
2 Flutes, 100° Stock No.	Body Diameter	Pilot Hole	Pilot Series
ATI455CTE-4	½"	.125	ATI485-
ATI455CTG-4	⅝"	.125	ATI485-

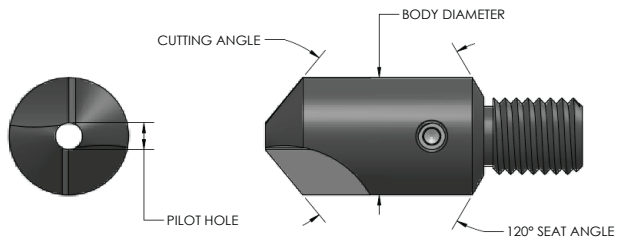

REPLACEABLE PILOTS		
Stock No.	Pilot Diameter	Shank Diameter
ATI484-2	#40	.086
ATI484-12	#30	.086
ATI484-21	#21	.086
ATI484-31	#11	.086
ATI484-32	#10	.086
ATI484-56	3/32"	.086
ATI484-57	1/8"	.086
ATI484-59	5/32"	.086
ATI484-61	3/16"	.086
ATI484-63	7/32"	.086
ATI484-65	1/4"	.086
ATI485-57	1/8"	.125
ATI485-59	5/32"	.125
ATI485-61	3/16"	.125
ATI485-65	1/4"	.125

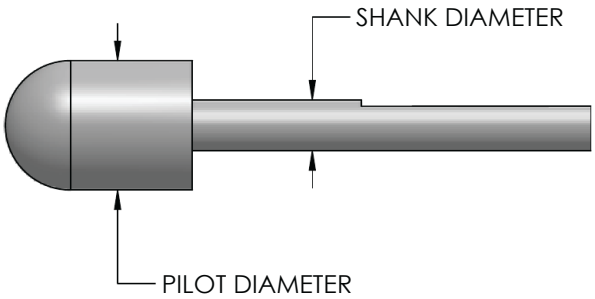

ATI508K Cannon Plug Pliers

- Slip-joint handles
- Serrated, replaceable plastic jaws (ATI508K-4)
- Adjustable grip range from ¾" to 2-½" diameter
- Used to tighten or loosen threaded collars on electrical connectors

ATI508K

ATI044P3 Camloc Pliers

- For use with Camloc Fasteners, Stud Series 2000, 2700, and 4002

ATI0443P3

Sheet Holder Pliers

- Forged steel
- Available with ergonomically designed cushioned grips

Stock No.	Description
ATI508S	For use with ATI542, ATI543, and plier-operated sheet holders and side grip clamps
ATI508SG	ATI508S with high visibility cushioned grips

ATI508SG

Spring Tension Clamps

- U-clamp, plier operated
- 70-Pound clamping pressure

Stock No.	Material Capacity	Reach
ATI542	0-7/16"	2"
ATI542S	0-7/16"	2"
ATI543	¼"-15/32"	3"

ATI542

Side-Grip Clamps

- Plier operated, spring loaded
- Minimized surface marring
- No over tightening possible
- 60 Pounds clamping force

Stock No.	Material Capacity	Reach	Oal
ATI550SG	0-¾"	1"	2-7/16"
ATI551SG	0-¾"	½"	2-7/16"
ATI552SG	0-½"	1"	2-3/16"
ATI553SG	0-½"	½"	2-3/16"

ATI550SG

⚠ WARNING

- Airframe tooling can cause flying chips
- Read safety precautions on pages W1 to W2

ATI TOOLS

Temporary Fasteners

ATI552M

Plier Operated Temporary Fasteners

Stock No.	Grip Range	Size	For Drill	Color
ATI551M	0-¼"	3/32"	#40	Zinc
ATI552M	0-¼"	1/8"	#30	Copper
ATI553M	0-¼"	5/32"	#21	Black
ATI554M	0-¼"	3/16"	#10	Brass
ATI556M	0-¼"	¼"	1/4"	Copper
ATI551MHD	0-½"	3/32"	#40	Zinc
ATI552MHD	0-½"	1/8"	#30	Copper
ATI553MHD	0-½"	5/32"	#21	Black
ATI554MHD	0-½"	3/16"	#10	Brass
ATI556MHD	0-½"	¼"	¼"	Copper

ATI552WNX

Manually Operated Temporary Fasteners, Wing Nut

Stock No.	Grip Range	Size	For Drill	Color
ATI551WNX	0-½"	3/32"	#40	Zinc
ATI552WNX	0-½"	1/8"	#30	Copper
ATI553WNX	0-½"	5/32"	#21	Black
ATI554WNX	0-½"	3/16"	#10	Brass
ATI556WNX	0-½"	¼"	1/4"	Copper
ATI551WNXL	0-1"	3/32"	#40	Zinc
ATI552WNXL	0-1"	1/8"	#30	Copper
ATI553WNXL	0-1"	5/32"	#21	Black
ATI554WNXL	0-1"	3/16"	#10	Brass
ATI556WNXL	0-1"	¼"	¼"	Copper

ATI800FG

ATI800FG Skin Clamp Runner, For Installing Cylindrical Body Fasteners

- Heavy duty, lightweight, and compact
- Push button rapid reverse with lock position
- Dual roller clutch carriers for longevity
- Greater torque in reverse

ATI551HNX

Power Operated Temporary Fasteners, Hex Nut

Stock No.	Grip Range	Size	For Drill	Color
ATI551HNX	0-½"	3/32"	#40	Zinc
ATI552HNX	0-½"	1/8"	#30	Copper
ATI553HNX	0-½"	5/32"	#21	Black
ATI554HNX	0-½"	3/16"	#10	Brass
ATI556HNX	0-½"	¼"	1/4"	Copper
ATI551HNXL	0-1"	3/32"	#40	Zinc
ATI552HNXL	0-1"	1/8"	#30	Copper
ATI553HNXL	0-1"	5/32"	#21	Black
ATI554HNXL	0-1"	3/16"	#10	Brass
ATI556HNXL	0-1"	¼"	¼"	Copper

CBXBF532PC

Power Operated Temporary Fasteners, Cylindrical Body W/ Plastic Cap

Stock No.	Grip Range	Size	For Drill	Color
CBXBF332PC	0-½"	3/32"	#40	Zinc
CBXBF18PC	0-½"	1/8"	#30	Copper
CBXBF532PC	0-½"	5/32"	#21	Black
CBXBF316PC	0-½"	3/16"	#10	Brass
CBXBF14PC	0-½"	¼"	¼"	Copper
CBXLBF332PC	0-1"	3/32"	#40	Zinc
CBXLBF18PC	0-1"	1/8"	#30	Copper
CBXLBF532PC	0-1"	5/32"	#21	Black
CBXLBF316PC	0-1"	3/16"	#10	Brass
CBXLBF14PC	0-1"	¼"	¼"	Copper

ATI800FGC

ATI800FGC Skin Clamp Runner, Torque Control Clutch

- Heavy duty and lightweight
- Adjustable clutch for specific torque applications
- Push button rapid reverse with lock position
- Dual roller clutch carriers for longevity
- Greater torque in reverse

ATI101AF-3A

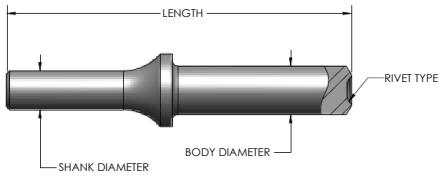

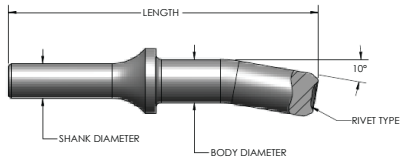

Standard Straight and Offset Rivet Sets

- Blended radius between cup and chamfer
- Highly polished cup. Free of machine marks or ridges
- Manufactured from high grade, shock resistant steel

Straight Type Rivet Set Stock No.	Offset Type Rivet Set Stock No.	Length (in)	Rivet Type	Rivet Size (in)	Shank Diameter (in)	Body Diameter (in)
ATI100AF-3A	ATI101AF-3A	3 ½	FLUSH	FLUSH	0.401	½
ATI100AF-3B	ATI101AF-3B	3 ½	FLUSH	FLUSH	0.401	⅝
ATI100AF-5A	ATI101AF-5A	5 ½	FLUSH	FLUSH	0.401	½
ATI100AF-5B	ATI101AF-5B	5 ½	FLUSH	FLUSH	0.401	⅝
ATI100AF-7A	ATI100AF-7A	7 ½	FLUSH	FLUSH	0.401	½
ATI100AF8A	ATI101AF8A	10 ½	FLUSH	FLUSH	0.401	½
ATI100A2-332		2 ½	AN470	3/32	0.401	½
ATI100A218		2 ½	AN470	⅛	0.401	½
ATI100A2532		2 ½	AN470	5/32	0.401	½
ATI100A2316		2 ½	AN470	3/16	0.401	½
ATI100A214		2 ½	AN470	¼	0.401	⅝
ATI100A21/4F		2 ½	BACR15FT	¼	0.401	⅝
ATI100A31/16	ATI101A31/16	3 ½	AN470	1/16	0.401	½
ATI100A33/32	ATI101A33/32	3 ½	AN470	3/32	0.401	½
ATI100A3-1/8	ATI101A3-1/8	3 ½	AN470	⅛	0.401	½
ATI100A31/8F	ATI101A31/8F	3 ½	BACR15FT	⅛	0.401	½
ATI100A35/32	ATI101A35/32	3 ½	AN470	5/32	0.401	½
ATI100A3532F	ATI101A3532F	3 ½	BACR15FT	5/32	0.401	½
ATI100A33/16	ATI101A3316	3 ½	AN470	3/16	0.401	½
ATI100A3316F	ATI101A3316F	3 ½	BACR15FT	3/16	0.401	½
ATI100A37/32	ATI101A3732	3 ½	AN470	7/32	0.401	½
ATI100A3732F	ATI101A3732F	3 ½	BACR15FT	7/32	0.401	½
ATI100A3-1/4	ATI101A3-1/4	3 ½	AN470	¼	0.401	⅝
ATI100B3-1/4	ATI101B3-1/4	3 ½	AN470	¼	0.498	⅝
ATI100A31/4F	ATI101A31/4F	3 ½	BACR15FT	¼	0.401	⅝
ATI100A53/32	ATI101A53/32	5 ½	AN470	3/32	0.401	½
ATI100A5332F		5 ½	BACR15FT	3/32	0.401	½
ATI100ASP03		5 ½	BACR15FT	3/32	0.401	0.310
ATI100A51/8	ATI101A518	5 ½	AN470	⅛	0.401	½
ATI100A55/32	ATI101A5-532	5 ½	AN470	5/32	0.401	½
ATI100A5532F	ATI101A5532F	5 ½	BACR15FT	5/32	0.401	½
ATI100A53/16	ATI101A53/16	5 ½	AN470	3/16	0.401	½
ATI100A57/32	ATI101A57/32	5 ½	AN470	7/32	0.401	½
ATI100A514	ATI101A514	5 ½	AN470	¼	0.401	⅝
ATI100A73/32	ATI101A73/32	7 ½	AN470	3/32	0.401	½
ATI100A71/8	ATI101A71/8	7 ½	AN470	⅛	0.401	½
ATI100A75/32	ATI101A75/32	7 ½	AN470	5/32	0.401	½
ATI100A73/16	ATI101A73/16	7 ½	AN470	3/16	0.401	½
ATI100A77/32	ATI101A77/32	7 ½	AN470	7/32	0.401	½
ATI100A71/4A	ATI101A7-1/4	7 ½	AN470	¼	0.401	⅝
ATI100A8332	ATI101A8332	10 ½	AN470	3/32	0.401	½
ATI100A818	ATI101A818	10 ½	AN470	⅛	0.401	½
ATI100A8532	ATI101A8532	10 ½	AN470	5/32	0.401	½
ATI100A8316	ATI101A8316	10 ½	AN470	3/16	0.401	½
ATI100A93/32	ATI101A93/32	13 ½	AN470	3/32	0.401	½

⚠ WARNING

- Airframe tooling can cause flying chips
- Read safety precautions on pages W1 to W2

ATI TOOLS

Rivet Sets

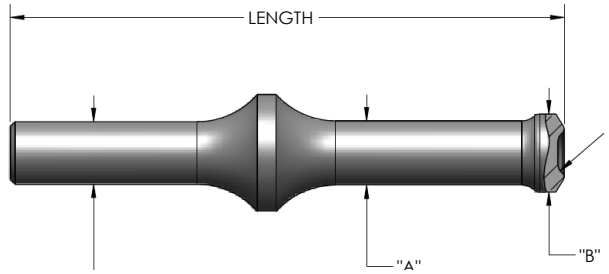

Modified Rivet Sets

Straight Rivet Set Stock No.	Length (in)	Offset Rivet Set Stock No.	Length (in)	Rivet Type	Rivet Size (in)	Shank Size (in)	"A" Dimension (in)	"B" Dimension (in)
1112MBC4014	3.31	**1112MBR40143**	3 ½	BACR15FT	⅛	0.401	0.280	0.280
ST1112BC453	3.31			BACR15FT	⅛	0.401	0.281	0.437
1112MBC4015	3.31	**1112MBR40153**	3 ½	BACR15FT	5⁄32	0.401	0.310	0.350
1112MBC401A5	3.31			BACR15FT	5⁄32	0.401	0.310	0.310
ST1112BC553	3.31			BACR15FT	5⁄32	0.401	0.312	0.500
1112MBC4016	3.31	**ST1112MBR63**	3 ½	BACR15FT	5⁄32	0.401	0.340	0.410
1112MBC401A6	3.31			BACR15FT	5⁄32	0.401	0.368	0.340
ST1112BC653	3.31			BACR15FT	5⁄32	0.401	0.344	0.562
ST1112MBC7	3.31	**1112MBR40173**	3 ½	BACR15FT	7⁄32	0.401	0.380	0.480
1112MBC401A7	3.31			BACR15FT	7⁄32	0.401	0.406	0.380
1112MBC4018	3.31	**1112MBR40183**	3 ½	BACR15FT	¼	0.401	0.410	0.540
1112MBC401A8	3.31			BACR15FT	¼	0.401	0.482	0.410
ST1112BC853	3.31			BACR15FT	¼	0.401	0.406	0.656

Gooseneck Rivet Set

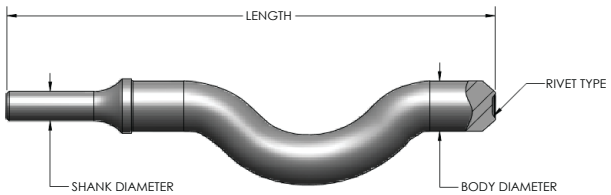

Double Offset Rivet Set

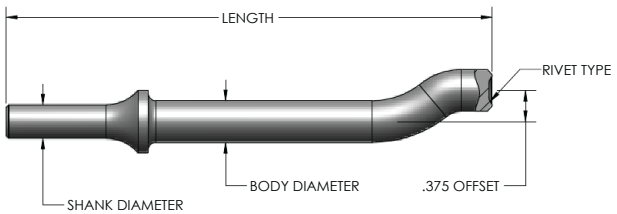

Standard Gooseneck and Double Offset Rivet Sets

Gooseneck Rivet Set Stock No.	Length (in)	Body Diameter (in)	Double Offset Stock No.	Length (in)	Body Diameter (in)	Rivet Type	Rivet Size (in)	Shank Diameter (in)
ATI104AF	6 ⅝	0.69	**ATI105AF**	5 ¾	½	FLUSH	FLUSH	0.401
ATI104A-1/4	6 ⅝	0.69	**ATI105A-1/4**	5 ¾	½	AN470	¼	0.401
ATI104A-1/8	6 ⅝	0.69	**ATI105A-1/8**	5 ¾	½	AN470	⅛	0.401
ATI104A-3/16	6 ⅝	0.69	**ATI105A-3/16**	5 ¾	½	AN470	3⁄16	0.401
ATI104A-3/32	6 ⅝	0.69	**ATI105A-3/32**	5 ¾	½	AN470	3⁄32	0.401
ATI104A-5/32	6 ⅝	0.69	**ATI105A-5/32**	5 ¾	½	AN470	5⁄32	0.401

ATI106A

Rubber Guard Swivel Flush Set

- Ball swivel type
- Highly polished crowned face with rubber guard
- Designed for ease of handling, with a swivel action for quick alignment.

Stock No.	Face Diameter (in)	Length (in)	Shank Diameter (in)
ATI106A	1 ¼	3 ½	.401
ATI106B	1 ¼	3 ½	.498

ATI110CB

Rubber Guarded Flush Rivet Set

- Highly polished crowned face
- Rubber rim guard to prevent slipping and damage to skin surface

Stock No.	Face Diameter (in)	Length (in)	Shank Diameter (in)
ATI110CA	¾	2 ½	.401
ATI110CB	1	2 ½	.401
ATI110CC	1 ¼	2 ½	.401

ATI112A

Mushroom Type Flush Rivet Set

- Highly polished crowned face
- Mushroomed face to prevent famage in thin sections

Stock No.	Face Diameter (in)	Length (in)	Shank Diameter (in)
ATI112A	1 ⅞	3	.401
ATI112B	1 ⅞	3	.498

ATI121A-3

Offset Flush Rivet Set

- 10 Degree angle offset
- Highly polished crowned face

Stock No.	Face Diameter (in)	Length (in)	Shank Diameter (in)
ATI121A-3	1 ¼	3 ½	.401
ATI121A-4	1	5 ½	.401
ATI121A-6	1	7 ½	.401

ATI107A-1

Flush Set

- Straight flush set
- Crowned face for rapid flush riveting

Stock No.	Face Diameter (in)	Length (in)	Shank Diameter (in)	Material
ATI107A-1	1	2 ¾	.401	Steel
ATI107A-2	1 ¼	2 ¾	.401	Steel
ATI107A-2D	1	3 ¼	.401	Steel
ATI107A2DB	1	3 ¼	.401	Steel With Brass Insert
ATI107A2DN	1	3 ¼	.401	Steel with Nylon Insert
ATI107A-3	1 ¼	3 ½	.401	Steel
ATI107A-4	1	5 ½	.401	Steel
ATI107A-6	1	7 ½	.401	Steel
ATI119A-1B	¾	2 ⅛	.401	Steel
ATI119A-2B	1	2 ⅛	.401	Steel
ATI119A-3B	1 ⅛	2 ⅛	.401	Steel
ATI119A4B	1 ¼	2 ⅛	.401	Steel
ATI119B-2B	1	2 ⅛	.498	Steel

ATI113A-1

Extra Short Flush Rivet Set

- Extra short for access and strengh
- Highly polished crowned face

Stock No.	Face Diameter (in)	Length (in)	Shank Diameter (in)
ATI113A-1	¾	1 $^{11}/_{16}$	.401
ATI113A-2	1	1 $^{13}/_{16}$	.401
ATI113A-3	1 ¼	1 $^{13}/_{16}$	.401

ATIST1111BK2

Offset Flush Rivet Set

- Highly polished machined crown
- Replaceable polyurethane rim to prevent slipping and skin damage

Stock No.	Face Diameter (in)	Length (in)	Shank Diameter (in)
ATIST1111BK1	¾	2 ½	.401
ATIST1111BK2	1	2 ½	.401
ATIST1111BK3	1 ¼	2 ½	.401

⚠ WARNING

- Airframe tooling can cause flying chips
- Read safety precautions on pages W1 to W2

ATI TOOLS

Knockout Punches

Knockout Punches

- Premium, shock resistant, heat treated steel

Standard Knockout Punch	Hi-Shear Knock Out Punch	Rivet Size (in)	Length (in)	Shank Diameter (in)
ATI141A33/32	ATI140A-3	3/32	3 1/2	.401
	ATI140A341/4	3/32	4 1/4	.401
ATI141A31/8	ATI140A-4	1/8	3 1/2	.401
	ATI140A441/4	1/8	4 1/4	.401
ATI141A35/32	ATI140A-5	5/32	3 1/2	.401
	ATI140A541/4	5/32	4 1/4	.401
ATI141A33/16	ATI140A-6	3/16	3 1/2	.401
ATI141B33/16	ATI140B-6	3/16	3 1/2	.498
	ATI140A641/4	3/16	4 1/4	.401
ATI141A37/32		7/32	3 1/2	.401
ATI141A31/4	ATI140A-8	1/4	3 1/2	.401
ATI141B31/4	ATI140B-8	1/4	3 1/2	.498
	ATI140A841/4	1/4	4 1/4	.401
ATI141A35/16	ATI140A-10	5/16	3 1/2	.401
ATI141B35/16	ATI140B-10	5/16	3 1/2	.498
ATI141A33/8	ATI140A-12	3/8	3 1/2	.401
ATI141B33/8	ATI140B-12	3/8	3 1/2	.498

Hi-Shear® Knockout Punch

Standard Knockout Punch

Rivet Cutters

ATI501R Rivet Cutter - 3/32" - 1/4" -Standard Handles

- Cuts all aluminum rivets from 3/32" to 1/4"
- Adjustable rivet cutting length guide from 1/4" to 3/4" in 1/16" increments

ATI501R

ATI501S Rivet Cutter - 3/32" - 1/4" - Extended Handles

- Cuts all aluminum rivets from 3/32" to 1/4"
- Adjustable rivet cutting length guide from 1/4" to 3/4" in 1/16" increments
- 13" Tubular handles for additional leverage

ATI501S

ATI TOOLS
Rivet Squeezer Set

ATI108AS5/32

ATI109ER

Cupped and Flush Rivet Squeezer Sets

Rivet Size (in)	Body Diameter (in)	Shank Diameter (in)	1/8" Body Length	1/4" Body Length	3/8" Body Length	1/2" Body Length	5/8" Body Length	3/4" Body Length	Rivet Type
3/32	3/8	3/16	ATI108AN3/32	ATI108AP3/32	ATI108AR3/32	ATI108AS3/32	ATI108AT3/32	ATI108AW3/32	AN470
1/8	3/8	3/16	ATI108AN1/8	ATI108AP1/8	ATI108AR1/8	ATI108AS1/8	ATI108AT1/8	ATI108AW1/8	AN470
5/32	1/2	3/16	ATI108AN5/32	ATI108AP5/32	ATI108AR5/32	ATI108AS5/32	ATI108AT5/32	ATI108AW5/32	AN470
5/32	1/2	3/16	ATI108AN532F	ATI108AP532F	ATI108AR532F	ATI108AS532F	ATI108AT532F	ATI108AW532F	BACR15FT
3/16	1/2	3/16	ATI108AN3/16	ATI108AP3/16	ATI108AR3/16	ATI108AS3/16	ATI108AT3/16	ATI108AW3/16	AN470
3/16	1/2	3/16	ATI108AN316F	ATI108AP316F	ATI108AR316F	ATI108AS316F	ATI108AT316F	ATI108AW316F	BACR15FT
1/4	5/8	3/16	ATI108AN1/4	ATI108AP1/4	ATI108AR14	ATI108AS1/4	ATI108AT1/4	ATI108AW1/4	AN470
1/4	5/8	3/16	ATI108AN1/4F	ATI108AP1/4F	ATI108AR1/4F	ATI108AS1/4F	ATI108AT1/4F		BACR15FT
FLUSH	1/2	3/16	ATI109AN	ATI109AP	ATI109AR	ATI109AS	ATI109AT	ATI109AW	FLUSH
FLUSH	3/8	3/16	ATI109EN	ATI109EP	ATI109ER	ATI109ES	ATI109ET	ATI109EW	FLUSH
FLUSH	1/2	1/4	ATI109BN	ATI109BP	ATI109BR	ATI109BS	AT109BT	ATI109BW	FLUSH
3/32	3/8	1/4	ATI108BN3/32	ATI108BP3/32	ATI108BR3/32	ATI108BS3/32	ATI108BT3/32	ATI108BW332	AN470
1/8	3/8	1/4	ATI108BN1/8	ATI108BP1/8	ATI108BR1/8	ATI108BS1/8	ATI108BT1/8	ATI108BW18	AN470
5/32	1/2	1/4	ATI108BN5/32	ATI108BP5/32	ATI108BR5/32	ATI108BS5/32	ATI108BT5/32	ATI108BW532	AN470
3/16	3/8	1/4	ATI108BN3/16	ATI108BP3/16	ATI108BR3/16	ATI108BS3/16	ATI108BT3/16	ATI108BW316	AN470
1/4	5/8	1/4		ATI108BP1/4	ATI108BR1/4	ATI108BS1/4	ATI108BT14		AN470

Included in 33 Piece Kit Included in 16 Piece Kit

ATI108A33PC 33 Piece 3/16" Shank Rivet Squeezer Set

- For installing universal (AN470) and flush (AN426) rivets
- 3/16" Diameter shank with lock ring
- Universal (AN470) cup sizes 3/32", 1/8", 5/32", 3/16" and 1/4"
- Body lengths of 1/8", 1/4", 3/8", 1/2" and 5/8"
- Suitable for either hand or pneumatic squeezers
- See chart above for squeezer sets included

ATI108A33PC

ATI108A16PC 16 Piece 3/16" Shank Rivet Squeezer Set

- For installing universal (AN470) and flush (AN426) rivets
- 3/16" Diameter shank with lock ring
- Suitable for either hand or pneumatic squeezers
- Universal (AN470) cup sizes 3/32", 1/8", 5/32", 3/16" and 1/4"
- See chart above for squeezer sets included

ATI TOOLS

Rivet Squeezers

ATI501A Alligator Type Hand Rivet Squeezer

- 3/32" - 3/16" Rivet capacity
- 2 1/2" Reach
- 1-1/8" Gap
- 18" Handles for ample leverage
- Accepts 3/16" diameter shank rivet squeezer sets and cold dimple dies



ATI501A

C-Type Swivel Yoke Hand Rivet Squeezers

- 3/32" - 3/16" Rivet capacity
- 3/8" Stroke
- 5/8" Ram adjustment to eliminate shims
- 360 Degree swivel yoke can be locked in any position
- Accepts 3/16" diameter shank rivet squeezer sets and cold dimple dies

Stock No.	Reach (in)	Closed Gap (in)
ATI502AHD	1 1/2	1 5/8
ATI502AHE	3	1 1/2

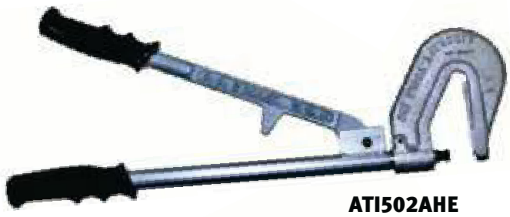

ATI502AHE

C-Type Fixed Yoke Hand Rivet Squeezers

- 3/32" - 3/16" Rivet capacity
- 5/8" Ram adjustment to eliminate shims
- Accepts 3/16" diameter shank rivet squeezer sets and cold dimple dies

Stock No.	Reach (in)	Closed Gap (in)
ATI502TH11/2	1 1/2	1 1/4
ATI502TH3	3	1 1/4

ATI502TH11/2

ATIU114A

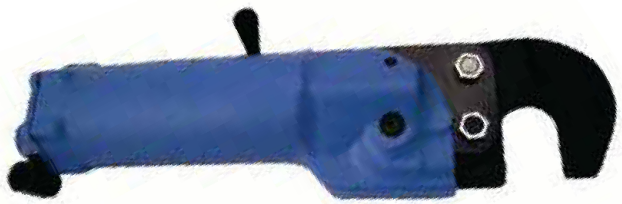

ATIU114C

Pneumatic Alligator Type Rivet Squeezer

- Quiet, simple and easy operation
- Swivel air inlet aids maneuverability

Stock No.	Yoke Style	Cylinder Type	Yoke Reach (in)	Aluminum Rivet Capacity (in)	Steel Rivet Capacity (in)	Overall Length (in)	Weight With Jaws (lbs)
ATIU114A	Alligator	Single	1 1/2	1/8	3/32	9 1/4	4
ATIU114A214	Alligator	Single	2 1/4	3/32	3/32	10 1/8	4 1/2
ATIU-114A-3	Alligator	Single	3	3/32	1/16	10 7/8	5
ATIU-114TA	Alligator	Tandem	1 1/2	3/16	5/32	12	5 1/2
ATIU114TA214	Alligator	Tandem	2 1/4	3/16	1/8	13	6
ATIU114TA-3	Alligator	Tandem	3	5/32	3/32	14	6 1/4

Stock No.	Yoke Style	Cylinder Type	Yoke Reach (in)	Aluminum Rivet Capacity (in)	Steel Rivet Capacity (in)	Overall Length (in)	Weight With Jaws (lbs)
ATIU114C	C-Type	Single	1 1/2	1/8	3/32	10 5/16	4 1/2

Rivet Hammers

- Teasing trigger for precise control
- Air flow control valve to limit output
- Beehive style retaining spring standard

Stock No.	Aluminum Rivet Capacity (in)	Steel Rivet Capacity (in)	BPM	Length (in)	Weight (lbs)	Shank Diameter
ATIU-2X	5/32	3/32	2580	6 1/2	2 1/4	.401
ATIATC3X	3/16	5/32	2160	7 1/4	2 1/4	.401
ATIATC4X	1/4	3/16	1740	8 1/4	2 3/4	.401
ATIU-7X	5/16	1/4	1140	9 1/4	5 1/8	.498
ATIU-9X	3/8	5/16	900	11 1/4	6	.498

ATI114C-3 Retaining Spring

- Fast thumb release to quickly change rivet sets
- Works with any 3x or 4x rivet hammer
- Accomodates 1/2" or 9/16" body diameter rivet sets

90 Degree Rivet Hammer Attachment

- Great for installing up to 3/16" rivets in hard to reach areas
- Uses ATI1757 and ATI1758 series rivet sets

Attachment Kit Stock No.	Attachment Only Stock No.	Shank Diameter (in)	Attachment Thread Pitch (TPI)	Application
ATI595BK	ATI595B	.401	7	Sioux Ingersoll Rand Jiffy
ATI595CK	ATI595C	.401	8	ATI Cleco Chicago Pneumatic

Stock No.	Rivet Type	Rivet Size (in)	Body Length (in)	Body Diameter (in)	Shank Diameter (in)
ATI1757AP332	AN470	3/32	1/4	5/8	.401
ATI1757AP1/8	AN470	1/8	1/4	5/8	.401
ATI1757AP532	AN470	5/32	1/4	5/8	.401
ATI1757AP316	AN470	3/16	1/4	5/8	.401
ATI1758AP	FLUSH	FLUSH	1/4	5/8	.401
ATI1758AR	FLUSH	FLUSH	3/8	5/8	.401
ATI1758AS	FLUSH	FLUSH	1/2	5/8	.401

WARNING

- Airframe tooling can cause flying chips
- Read safety precautions on pages W1 to W2

ATI TOOLS
Sheet-Metal Tool Kits

Rivet Gun Kit
- Durable soft sided case
- Air tool regulator and air tool oil
- Four common steel bucking bars
- Two rivet set retainer springs (standard and quick change)
- Pistol grip rivet hammer
- Three flush rivet sets
- Eight AN470 universal rivet sets (straight and offset)

Rivet Tool Kit Stock No.	Rivet Hammer
ATI590RGK3X	ATIATC3X
ATI590RGK-4X	ATIATC4X

ATI590RGK4X
Clear zipper case included

ATI590SMKSP1

Sheet Metal Mechanics Set
- Four straight AN470 universal rivet sets (3/32", 1/8", 5/32", 3/16")
- One flush rivet set
- Four integral pilot countersinks (#10, #21, #30, #40) pilot sizes
- Microstop-Ball Bearing
- Hand rivet cutter
- Rivet hammer (see chart)
- Four spring tension u-clamps
- 12 Each (3/32", 1/8", 5/32", 3/16") temporary fasteners
- Eight HSS drill bits; jobber length
- Sioux 1410 drill

Sheet Metal Mechanics Kit Stock No.	Rivet Hammer
ATI590SMKSP1	SIOUX 270A
ATI590SMKSP6	ATI ATIATC4X

Tungsten Bucking Bars

- High-density tungsten absorbs riveting impact
- Reduces vibration and minimizes bucking bar movment during riveting
- Sharp edges are radiused up to 1/16" to prevent skin damage
- Smaller configurated design provides enhanced bucking in tight areas

Stock No.	Weight (lbs)	Dimensions
ATI613T	9.0 lbs	
ATI614T	8.0 lbs	
ATI634T	1.6 lbs	
ATI634TX	1.4 lbs	
ATI729-3T	1.55 lbs	
ATI729-13T	1.2 lbs	
ATI732T	2.11 lbs	
ATI760B-2T	2.85 lbs	

Stock No.	Weight (lbs)	Dimensions
ATI760B-10T	5.5 lbs	
ATI760B-10TX	1.92 lbs	
ATI760B10TXX	1.25 lbs	
ATI764T	1.3 lbs	
ATI765T	1.75 lbs	
ATI766T	1.7 lbs	
ATIETBB08	6.0 lbs	

Stock No.	Weight (lbs)	Dimensions
ATIETBB10	3.85 lbs	
ATIETBB20	1.95 lbs	
ATIETBB22	2.90 lbs	
ATIETBB24	4.05 lbs	
ATIETBB25	3.15 lbs	
ATIETBB37	5.75 lbs	
ATIETBB40	3.05 lbs	

⚠ WARNING

- Airframe tooling can cause flying chips
- Read safety precautions on pages W1 to W2

ATI TOOLS

Bucking Bars

Steel Bucking Bars

- All bucking surfaces are polished to a minimum 63 finish after heat treat
- All sharp corners and edges are radiused 1/32"-1/16" to prevent skin damage
- All bucking surfaces are dipped in clear plastic to prevent damage during shipment and storage

Stock No.	Weight (lbs)	Dimensions
ATI604	1.5 lbs	
ATI605	1.5 lbs	
ATI608	1.25 lbs	
ATI610	.75 lbs	
ATI613	5.5 lbs	
ATI619	1.25 lbs	
ATI622	2.5 lbs	

Stock No.	Weight (lbs)	Dimensions
ATI627	7.75 lbs	
ATI630	1.5 lbs	
ATI633	1.5 lbs	
ATI634	1 lb	
ATI638	1.25 lbs	
ATI639	2 lbs	
ATI646	2.25 lbs	

Stock No.	Weight (lbs)	Dimensions
ATI647	1.5 lbs	
ATI649	2 lbs	
ATI658	3.75 lbs	
ATI669	1.5 lbs	
ATI670	2 lbs	
ATI680	2 lbs	
ATI681	1.5 lbs	

Stock No.	Weight (lbs)	Dimensions
ATI690	2.5 lbs	
ATI692	3.25 lbs	
ATI694	2 lbs	
ATI715	2 LBS	
ATI720	.75 LBS	
ATI722	1 LB	
ATI727	1 LB	

Stock No.	Weight (lbs)	Dimensions
ATI730	1.25 LBS	
ATI732	.75 LBS	
ATI736	2.25 LBS	
ATI750N-1	2.5 LBS	
ATI750P-3	2.75 LBS	
ATI750S-1	2.75 LBS	
ATI750S-61	2.75 LBS	
ATI751K-1	3 LBS	

Stock No.	Weight (lbs)	Dimensions
ATI760B-10	2 LBS	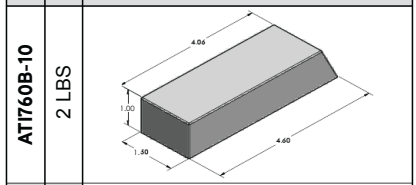
ATI760B-2	1.25 LBS	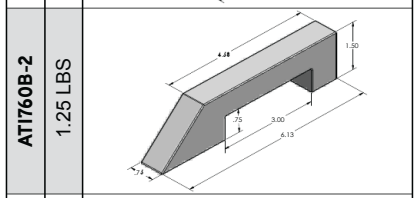
ATI761C5	4.5 LBS	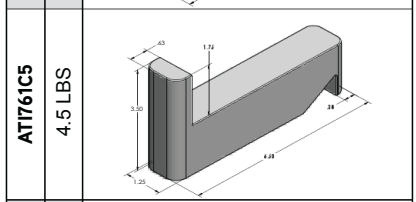
ATI763	1.25 LBS	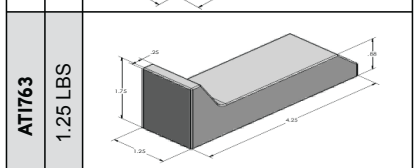

ATI590BBK Bucking Bar Set, 4-Piece

- Set Includes 1 Each: **ATI638, ATI647, ATI670, ATI681**

⚠ WARNING

- Airframe tooling can cause flying chips
- Read safety precautions on pages W1 to W2

RIVETING TOOLS AND ACCESSORIES

Hi-Lok® Tools

ATISK3539A8

Hi-Lok Roller Clutch Wrench

- Smooth, instantaneous engagement
- Good for limited access areas

ATISK3539A8 Hi-Lok Roller Clutch Wrench Kit

- Included **ATI2979U** HI-LOK removal pliers
- Used for installation and removal in confined areas
- Smooth, instantaneous engagement
- Six 3" long roller installation roller wrenches with dedicated sockets (7/32", 1/4", 5/16", 11/32", 3/8" and 7/16")
- One 3" long installation roller wrench with 1/4" square
- One 3" long removal roller wrench with 1/4" square

ATI2979U

ATISK3539L

Stock No.	Direction	Drive	Length (in)	Finish
ATI3539IT14	Installation	1/4" Hex Socket	3	Black Oxide
ATISK3539	Installation	1/4" Square	3	Black Oxide
ATISK3539L	Installation	1/4" Square	6	Black Oxide
ATI3539I1132	Installation	11/32" Socket	3	Black Oxide
ATI3539IT38	Installation	3/8" Hex Socket	3	Black Oxide
ATI3539IT516	Installation	5/16" Hex Socket	3	Black Oxide
ATI3539IT716	Installation	7/16" Hex Socket	3	Black Oxide
ATI3539IT732	Installation	7/32" Hex Socket	3	Black Oxide
ATISK3539B	Installation	1/4" Square	3	Zinc
ATISK3539BL	Installation	1/4" Square	6	Zinc
ATISK3539LR	Removal	1/4" Square	6	Black Oxide
ATISK3539R	Removal	1/4" Square	3	Black Oxide

ATI3600K

ATI3594K

ATI3600K Comprehensive Frangible Collar Installation Kit

Comprehensive kit for installing frangible collar fasteners, including Hi-Lok® and Hi-Lite ®

Kit contains:

- Ten sockets, 1/4" and 3/8" drive, hex sizes 3/16" thru 1/2"
- 1/4" ratchet and 3/8" compact ratchet, 72 tooth, dual pawl, reversing
- Ratchet extensions, 1/4" x 2" and 3/8" x 3
- Four T-hex keys, 5/64", 3/32", 1/8", and 5/32"
- One Standard Hex Key, 1/16"
- Compact case (8" x 5" x 1.75) with foam cutouts

ATI3594K Frangible Collar Installation Kit

Kit for installing frangible collar fasteners, including Hi-Lok® and Hi-Lite ®

Kit contains:

- Seven sockets, 1/4" drive, hex sizes 3/16" thru 3/8"
- 1/4" ratchet, 72 tooth, dual pawl, reversing
- Ratchet extensions, 1/4" x 2" and 1/4" x 4"
- Two T-hex keys, 5/64", 3/32"
- One Standard Hex Key, 1/16"
- Compact case (8" x 5" x 1.75") with foam cutouts, same case as ATI3600K

ATI2979U Hi-Lok Fastener Removal Pliers

- Serrated-jaw pattern for removal of all aluminum hi-lok fasteners
- Comfort grip handles
- Easy access to tight areas

ATI2979U

ATI3588K Frangible Collar Removal Kit

Kit for removing frangible collar type fasteners.

Kit Contains:

- Six ATI3585 removal sockets for the most common Hi-Lok® and Hi-Lite® collars
- ¼" ratchet, 72 tooth, dual pawl, reversing
- Collar removal pliers
- Ratchet extensions, 2" and 4" Length, ¼" Drive
- Four T-hex keys, 5/64", 3/32", 1/8", and 5/32"
- One Standard Hex Key, 1/16"
- Compact case (9" x 5" x 1.5") with foam cutouts

ATI3588K

Frangible Collar Removal Sockets

- New Patent-Pending design immediately engages collars with minimal downward force.
- Design allows for easy removal of collars from socket after extraction.
- Sockets feature ¼'' drive and a set screw holds the socket in place on ratchet.
- Removes most collars such as Hi-Lok & Hi-Lite in most materials, including stainless steel and aluminum.
- Versatility: One ATI3585 removal socket can accommodate multiple fastener sizes.
- Compact size enables removal in the tightest access areas.

Stock No.	Description
ATI3585-5B	Removes most -5 size Hi-Lok and Hi-Lite collars
ATI3585-6A	Removes most -6 size Hi-Lok and Hi-Lite collars
ATI3585-6B	Removes most -6 size aluminum Hi-Lok collars
ATI3585-8A	Removes most -8 size Hi-Lite collars
ATI3585-8B	Removes most -8 size stainless Hi-Lok collars
ATI3585-8C	Removes most -8 size aluminum Hi-Lok collars
ATI3585-6PC	Includes all six removal sockets above and socket rail



ATI3585-6PC

Hi-Torque® Bits

Hi-Torque Driver

Stock No.	Hex Insert	Blade Thickness (in)	Blade Width (in)	Body Diameter (in)	Length (in)
ATIHTS1	¼	0.049	0.274	½	1
ATIHTS-2	¼	0.059	0.295	½	1
ATIHTS-3	¼	0.059	0.377	½	1
ATIHTS-4	¼	0.073	0.502	½	1
ATIHTS-5	⅜	0.079	0.629	¾	1 ¼
ATIHTS6	⅜	0.095	0.745	¾	1 ¼

ATIHTS-3

WARNING

- Airframe tooling can cause flying chips
- Read safety precautions on pages W1 to W2

ATI TOOLS

Fastener Removal Tools

Huck Lockbolt Removal Chisels

- Used to remove swaged huck fasteners by shearing the collar
- .401 Shank
- 5 ½" Long

Stock No.	Huck Lockbolt Size (in)	Head Diameter
ATI2165-2	5/32	0.62
ATI2165-3	3/16	0.75
ATI2165-4	1/4	0.81
ATI2165-5	5/16	0.81
ATI2165-6	3/8	0.81

ATI2165-2

Flat Chisel

- Precision sharpened
- .401 Shank diameter
- ¾" Blade width

Stock No.	Length (in)
ATI1206-6	6 ¾
ATI1206-8	8
ATI1206-10	10
ATI1206-12	12

ATI206-6

ATI540SE-5 1/4" Hex-Bit Adapter

- Used with ATI540 and ATI540S to adapt to ¼" hex
- ⅜" Square drive
- ¼" Internal hex

ATI540SE-5

Screw Removal Tool

- .401 Shank diameter
- Secured wrench
- Hardened shock resistant steel

Stock No.	Drive	Length (in)
ATI540	⅜" Square	9
ATI540S	⅜" Square	4 ½
ATI540BL-7	¼" Internal Hex	7 ½
ATI540BS-5	¼" Internal Hex	5 ½

ATI540

El Brutus Screw Removal Tool

- Heat treated and plated for durability
- Removed the most stubborn screws

Stock No.	Screw Capacity (in)	Weight (lbs)	Length (in)
ATI540-5	¼	3.2	17
ATI540-7	⅜	5.4	18 ¾

ATI540-5

ATI590L

ATI590L Rivet Shaver Kit

- Includes **ATI429SXC** rivet shaver
- Carbide cutters and skirts for 5/16", 3/8", 7/16", 1/2", 9/16", 5/8" and 3/4" rivet heads
- Kit box with cutouts privides protection and quick identification of missing components

ATI429SXC

ATI429SXC Rivet Shaver

- Max 3/4" cutter capacity (with ATI429A-7 skirt)
- .0005" Depth adjustment
- Sioux 1.0 Hp 20,000 rpm power unit
- Comfort grip
- Shipped with 1/2" skirt installed (ATI429A-4)

Skirt Stock No.	Cutter Stock No.	Diameter (in)
	ATI429B-0	1/4
ATI429A-1	ATI429B-1	5/16
ATI429A-2	ATI429B2	3/8
ATI429A-3	ATI429B-3	7/16
ATI429A-4	ATI429B-4	1/2
ATI429A-5	ATI429B-5	9/16
ATI429A-6	ATI429B-6	5/8
ATI429A-7	ATI429B-7	3/4

ATI429A-7

ATI429A-7 Skirt Detail - Micro Miller

- 3/4" cutter capacity used with **ATI429B-7** cutter
- Skirt detail is exclusive only to ATI products

ATI429B-6

ATI429B-6 Carbide Cutter Detail - Micro Miller

- 5/8" diameter carbide cutter used with **ATI429A-6** skirt
- Engineered to cut very clean, no chatter or high spots in center

Hi-Shear® Removal

Hollow Cutters

- Used to remove Hi-Shear and Huck fasteners
- Used with standard microstops

Stock No.	Dimension "A" (in)	Dimension "B" (in)	Shank	Fastener Type	Size
ATI493C-0	0.365	0.124	1/4"-28	Hi-Shear	1/8
ATI493C-00	0.365	0.157	1/4"-28	Hi-Shear	5/32
ATI493C-1	0.438	0.188	1/4"-28	Hi-Shear	3/16
ATI493C-2	0.500	0.247	1/4"-28	Hi-Shear	1/4
ATI493C-3	0.562	0.310	1/4"-28	Hi-Shear	5/16
ATI493D-1	0.323	0.188	1/4"-28	Huck Lock Bolt	L6
ATI493D-3	0.413	0.250	1/4"-28	Huck Lock Bolt	L8

ATI493C-2

⚠ WARNING

- Airframe tooling can cause flying chips
- Read safety precautions on pages W1 to W2

ATI TOOLS

Shop Tools and Accessories

ATISK3614 Valve Core Removal Tool

- For rapid and safe tire deflation
- Machined aluminum tool threads into valve stem
- Releases and traps the valve core within the tool
- Exhausts the air through ports, away from the technician

ATISK3614

Mina-Vacs Pnuematic

- **ATI560M** Pulls up to six inches of mercury
- Removes objects such as sheet fasteners up to ¾" diameter from confines spaces
- Built in chip deflector to minimize bag damage
- Equipped with an "on" and "off" trigger button that can be locked in the "on" position
- Base models (ATI560C and ATI560M) do not include an extension hose

Vacuum Assembly Stock No.	Housing Material	Extension Hose Stock No.	Hose Material	Hose Length (in)	Bag Stock No.
ATI560C	Plastic	-	-	-	ATI560A-3
ATI560CWCF12	Plastic	ATI560CF12	Flexible Plastic	12	ATI560A-3
ATI560CWCF18	Plastic	ATI560CF18	Flexible Plastic	18	ATI560A-3
ATI560CWCF24	Plastic	ATI560CF24	Flexible Plastic	24	ATI560A-3
ATI560M	Aluminum	-	-	-	ATI560A-3
ATI560MF12	Aluminum	ATI560MFE12	Flexible Plastic	12	ATI560A-3
ATI560MF18	Aluminum	ATI560MFE18	Flexible Plastic	18	ATI560A-3
ATI560MF24	Aluminum	ATI560MFE24	Flexible Plastic	24	ATI560A-3
ATI560MF-36	Aluminum	ATI560MFE36	Flexible Plastic	36	ATI560A-3
ATI560MHDF18	Aluminum	ATI560MFE18	Flexible Plastic	18	ATI560HD3
ATI560MR-12	Aluminum	ATI560MRE12	Rigid Plastic	12	ATI560A-3
ATI560MR18	Aluminum	ATI560MRE18	Rigid Plastic	18	ATI560A-3
ATI560MR36	Aluminum	ATI560MRE36	Rigid Plastic	36	ATI560A-3

ATI560MH uses ATI560M aluminum housing for better strength and durability. Comes with 3M filter bag and adaptor. HEPA bag reduces exposure to cadmium and hexavalent chromium dust. Airtight cap on filter bag insures FOD containment

ATI560C

ATI560MF12

ATI560CF18

ATI560A-3

ATI560HD3

ATI560MH

ATI520JK Portable Swager Kit

- Used to precision-swage various ms type cable terminals on 1/16" to 3/16" diameter braided cables
- Can be used on the bench with the shock absorbing base or taken directly to the aircraft
- Kit includes base plate, foot control, air hose, complete set of dies and a pneumatic swager
- ATI520J pneumatic swager is available seperately

ATI520JK

ATI520CTK Pull Tester Kit

- Self contained hydraulic unit
- Designed to put tension load on the cable terminal assembly to verify swaged terminal integrity
- Capable of testing up to 3/16" cables

ATI520CTK

What is a Microstop and What Does it Do?

A "microstop" is a cylindrical tool that holds a cutting tool known as a "countersink."

The microstop allows the countersink to move perpendicular to the cutting surface at precise depths. When countersinking, the microstop can make "micro" adjustments up and down, and "stop" the countersink at the exact depth to match the profile of the fastener to be installed. The countersink depth is controlled by rotating the microstop skirt. The adjustments are extremely precise. Rotating the countersink skirt adjusts the countersink depth by only 0.0005 in.

Extreme precision is important when countersinking a hole because it enables the ultimate objective: to ensure that the fastener – typically a flush rivet – fills the countersunk hole completely. Usually a rivet gun is used for installing and deforming the flush rivet into the hole's geometry.

When each countersunk hole is precisely drilled and fasteners are properly installed, every part of the plane's skin has consistent strength and load distribution. The use of a microstop allows for uniformity and helps achieve this goal.

A versatile tool, a microstop works with any type of threaded shank cutter in applications where the depth of cut requires extreme precision. This would include countersinks, counterbores, and hollow cutters, just to name a few.

"Microstop & Countersink Cutter" in **advanced position**

"Microstop & Countersink Cutter" in **retracted position**

NOTE: *Skirt remains stationary when in contact with the cutting surface, enabling the operator to view the cutter.*

Anatomy of a Countersink

A countersink is a tool used to cut and form a hole so that a flush fastener can be installed. The main features of a countersink are the threaded shank, body, cutting angle, and pilot.

Threaded Shank

The threaded shank is inserted into the microstop shaft and its thread size is specified by the user. Industry standard thread sizes are 10-32, 1/4"-28, 3/8"-24, and 7/16"-20. The most common countersink shanks are 1/4"-28.

Body

The body of a countersink is typically cylindrical in shape and its diameter is determined by the fastener to be installed.

Cutting Angle

The cutting angle is determined by the fastener to be installed and is specified by the user. The cutting angle also indicates what the angle of the conically shaped hole will be when the hole is formed. The most common cutting angle is 100 degrees.

Pilot

The pilot diameter on a countersink is specified by the user and typically is the same diameter of the pre-drilled hole. It's important for the pilot end to be smooth and to have a hemispherical tip in order to prevent scratching.

The pilot acts like a guide when it is inserted into the pre-drilled hole (called the "pilot hole"). The pilot facilitates countersinking by properly aligning the countersink to the target hole.

The Countersink Cutter

The countersink cutter rotates at a very high speed and removes material to form a hole shaped like an inverted cone. This hole is cut to form the exact specifications of the fastener to be installed.

Extreme Precision and Accuracy

The microstop controls the countersink's depth with precise accuracy. Typically, the depth of cut is adjustable in increments of .001 inch, with more precise microstops available in .0005-inch increments. Once the microstop and countersink assembly is configured for the job, the assembly can be used hundreds of times with repeatable results.

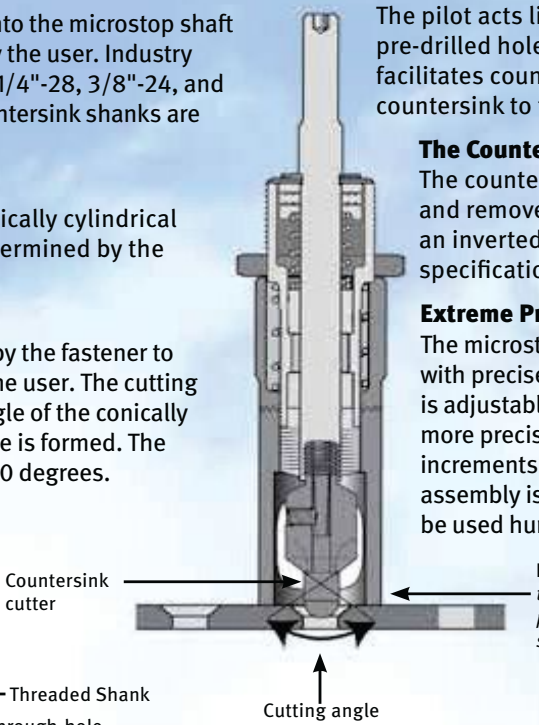

NOTE: *Microstop allows the countersink to move perpendicular to the cutting surface at precise depths.*

NOTE: *Integral countersink cutter shown. Countersinks are offered with interchangeable or integral pilot configurations.*

Installing a Hi-Lok® Fastener

The Hi-Lok® Roller Clutch Wrench is excellent for use in tight spaces. It works like a ratchet, but has a roller clutch mechanism that provides immediate engagement throughout its range. It also has a thru-hole that provides access for a hex wrench that may be needed to stop the pin from rotating during installation.

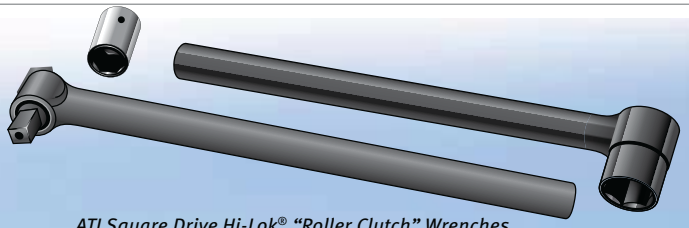

ATI Square Drive Hi-Lok® "Roller Clutch" Wrenches

Installation Procedure – A Hi-Lok® Roller Clutch Wrench or Hi-Lok® ratchet and Hi-Lok® socket are used along with a hex wrench to install Hi-Loks®.

With these tools, the operator tightens the collar until the collar's hex nut shears (or "franges") off. During tightening, the hex wrench is used to secure the pin. It fits into the pin via the thru-hole in the wrench.

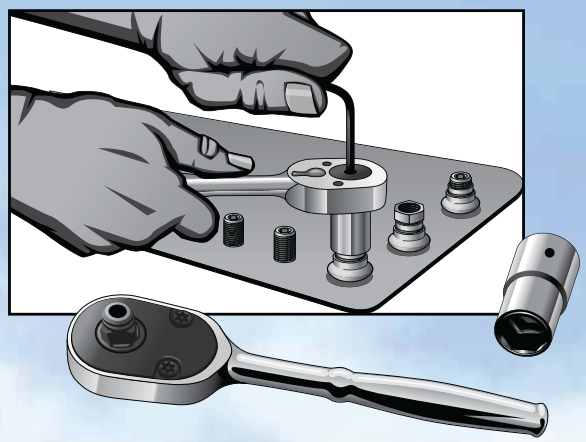

To complete installation, the operator collects the hex nut and removes it to minimize the risk of FOD.

Removing a Hi-Lok® Fastener

Removing a frangible collar can be a challenge. The pin and collar are mechanically connected and tamperproof, so standard tools won't work. Also, the removal process must avoid scratching the skin of the aircraft. ATI offers specialized sockets and pliers for removing frangible collars. Let's take a look:

Removal Procedure – The Hi-Lok® collar must be clamped and unscrewed and the pin tapped out to completely remove the assembly. A variety of tools can be used, but repeatability and scratching can be a problem.

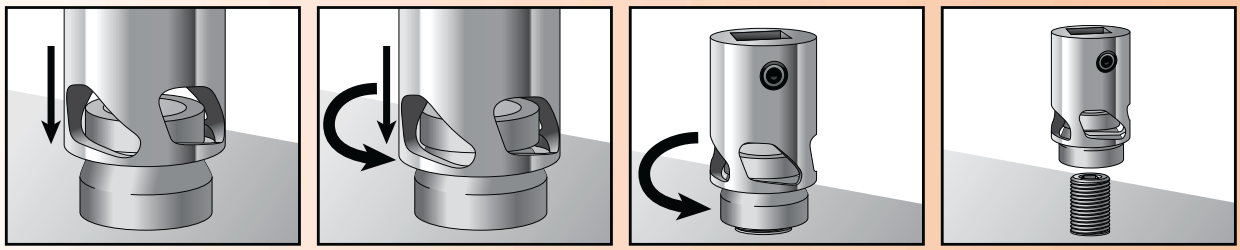

Recently, ATI developed a Hi-Lok® removal socket that has internal teeth that bite into the collar material. Using a Hi-Lok® ratchet or Hi-Lok® Roller Clutch Wrench, the operator places the socket over the collar and turns the ratchet. The socket's teeth dig into the collarmaterial with sufficient force to gain a hold of the collar so that it can be unscrewed. Again, a hex wrench may be used to stop the pin from rotating as needed.

Pliers – Another way to remove Hi-Lok® fasteners is by using pliers that are designed for the purpose. The jaws of the Hi-Lok® Removal Pliers are knurled to enable a good grip on the collar. Then the user applies "elbow grease" to remove the collar.

Kits – ATI offers Frangible Collar Removal Kits that work on a variety of commonly used sizes of threaded, tamperproof fasteners.

ATI Hi-Lok® Frangible Collar Removal Kit *(shown)*

Other kits available.

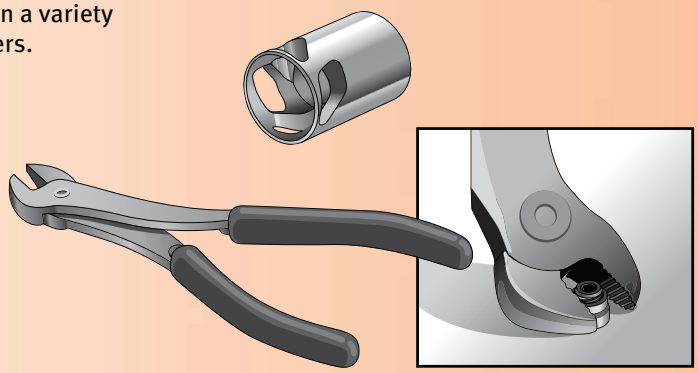

AVIATION AIR DRILLS

Snap-on Industrial drills are used in aviation applications ranging from light assembly to metalworking,. Their powerful five vane motors makes these drills great for drilling applications that contain ferrous and non-ferrous metals, plastics, and composite materials.

Built for durability, their 3 planet gear system delivers superior life and load capacity. The Snap-on Industrial drills offer maximum comfort with reduced operator fatigue by offering a low sound level and low vibration solution. Operator comfort is achieved through the implementation of a light weight aluminum housing and a comfort grip. Drills are available in both reversing and non-reversing pistol grip and lever handle configurations.

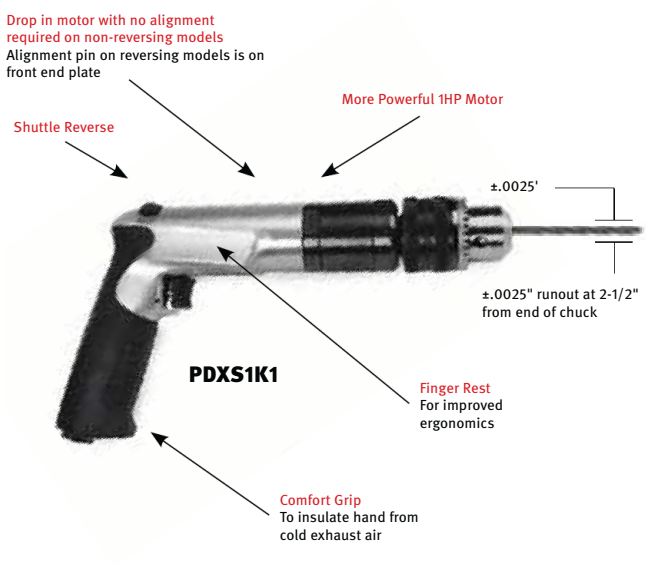

Performance

Powerful 1.0 HP motors easily handle a a wide range of drilling applications

- With excellent run-out characteristics, (+/- 0.0025” @ 2.5" from the end of the chuck) drills provide precision required for critical applications
- Teasing trigger provides excellent speed control

Ergonomics

- Comfortable, compact drill bodies includes finger rests on the side of tool do not protrude which allows trigger actuation with stronger middle finger
- Anatomic design keeps wrist and arm straight, allows high feed forces
- Low noise and vibration levels for comfort in extended use operations

Serviceability

- Drop in motors with no alignment required (applies to non-reversing drills only)
- High part interchangeability = lower service part inventories

Reversible Pistol Grip Air Drills

Style	Stock No. (Keyed Chuck)	Stock No. (Keyless Chuck)	Chuck Capacity in (mm)	Free Speed RPM	Weight lb (kg)	Length in (mm)	Spindle Thread
1.0 hp (0.75 kw) Reversible	PDXF1K1	PDXF1L1	⅜(10)	550	3.1 (1.4)	8.6 (220)	⅜"-24
	PDXF1K5	PDXF1L5	⅜(10)	1500	2.6 (1.15)	7.6 (195)	⅜"-24
	PDXF1K6	PDXF1L6	⅜(10)	2050	2.6 (1.15)	7.6 (195)	⅜"-24
	PDXS1K1	PDXS1L1	½(13)	550	3.6 (1.6)	9.1 (230)	½"-20

Non-Reversible Pistol Grip Air Drills

Style	Stock No. (Keyed Chuck)	Stock No. (Keyless Chuck)	Chuck Capacity in (mm)	Free Speed RPM	Weight lb (kg)	Length in (mm)	Spindle Thread
1.0 hp (0.75 kw)Reversible	PDXT2K7	-	¼ (6)	2600	2.3 (1.05)	6.5 (165)	⅜"-24
	PDXT2K8	-	¼ (6)	3500	2.3 (1.05)	6.5 (165)	⅜"-24
	PDXT2K9	-	¼ (6)	5500	2.3 (1.05)	6.5 (165)	⅜"-24
	PDXF2K0	-	⅜(10)	450	2.9 (1.3)	8 (205)	⅜"-24
	PDXF2K2	-	⅜(10)	600	2.9 (1.3)	8 (205)	⅜"-24
	PDXF2K3	PDXF2L3	⅜(10)	900	2.9 (1.3)	8 (205)	⅜"-24
	PDXF2K4	PDXF2L4	⅜(10)	1350	2.9 (1.3)	8 (205)	⅜"-24
	PDXF2K7	PDXF2L7	⅜(10)	2600	2.5 (1.1)	7 (180)	⅜"-24
	PDXF2K8	PDXF2L8	⅜(10)	3500	2.5 (1.1)	7 (180)	⅜"-24
	PDXF2K9	PDXF2L9	⅜(10)	5500	2.5 (1.1)	7 (180)	⅜"-24
	PDXS2K0	PDXS2L0	½(13)	450	3.3 (1.5)	8.5 (215)	½"-20
	PDXS2K2	PDXS2L2	½(13)	600	3.3 (1.5)	8.5 (215)	½"-20
	PDXS2K3	PDXS2L3	½(13)	900	3.3 (1.5)	8.5 (215)	½"-20
	PDXS2K4	PDXS2L4	½(13)	1350	3.3 (1.5)	8.5 (215)	½"-20
	PDXS2K7	PDXS2L7	½(13)	2600	2.9 (1.3)	7.5 (190)	½"-20

Snap-on Pistol Grip Rivet Shavers

- Powerful 21,000 RPM, 1HP (0.75 kw), 5 vane motor
- Micro adjustable shaving depth with spring loaded removable stabilizer
- Shaves rivets from 5/16" – 5/8"
  Uses industry standard 1/4" – 28 threaded rivet shaver cutters

Stock No.	Cutter Diameter in (mm)	Free Speed RPM	Weight lbs (kg)	Length in (mm)
PVX1	5/16 (8)	21,000	2.7 (1.2)	8.0 (205)
PVX2	3/8 (10)	21,000	2.7 (1.2)	8.0 (205)
PVX3	7/16 (11)	21,000	2.7 (1.2)	8.0 (205)
PVX4	1/2 (13)	21,000	2.7 (1.2)	8.0 (205)
PVX5	9/16 (14)	21,000	2.7 (1.2)	8.0 (205)
PVX6	5/8 (16)	21,000	2.7 (1.2)	8.0 (205)

PVX1

See our ATI rivet shaver cutters on page N109

1/4" Chuck Pistol Grip Air Drills

- An industry favorite due to its small size and full 1/3 HP motor
- Ergonomic comfort grip and handle design for maximum comfort
- Smooth teasing trigger for controlled starts
- Rotatable Exhaust
- .6" / 15mm side to center

	Stock No.	Chuck Capacity in (mm)	Free Speed RPM	Weight lbs (kg)	Length in (mm)	Sound Level dB(A)	Spindle Thread
.33 hp (0.25 kw) - Non-reversible	1410	1/4 (6)	2600	1.3 (0.60)	6.3 (160)	75	3/8"-24
	DR1412	1/4 (6)	3600	1.3 (0.60)	6.3 (160)	75	3/8"-24
	DR1414	1/4 (6)	4300	1.3 (0.60)	6.3 (160)	75	3/8"-24
	DR1416	1/4 (6)	6000	1.3 (0.60)	6.3 (160)	75	3/8"-24
.20 hp (0.15 kw) - Reversible	1410R	1/4 (6)	2000	1.3 (0.60)	6.3 (160)	75	3/8"-24
	1412R	1/4 (6)	2600	1.3 (0.60)	6.3 (160)	75	3/8"-24

1410

1410R

45° & 90° Aircraft Angle Air Drills

- Requires only 2" of clearance with the proper drill bit
- Drill up to 1/4" diameter holes
- Internally threaded 1/4"-28 spindle accepts industry standard threaded drill bits
- .33 hp (0.25 kw)

	Stock No.	Free Speed RPM	Weight lbs (kg)	Length in (mm)	Sound Level dB(A)
45° Angle Head	1AM1541	2800	1.5 (0.7)	10.2 (259)	75
	1AM1441	2200	1.5 (0.7)	10.2 (259)	75
90° Angle Head	1AM1551	2800	1.5 (0.7)	9.7 (246)	75
	1AM1451	2200	1.5 (0.7)	9.7 (246)	75

1AM1551

1AM1541

See our ATI threaded drills and countersinks on pages N083 to N092

Pistol Grip Skin Clamp Runner

- 2500 RPM - Quickly installs and removes hex nut style Skin Clamps
- Teasing throttle for precise control
- Conveniently located reverse

Stock No.	Free Speed RPM	Weight lbs (kg)	Length in (mm)	Sound Level dB(A)
SSR6P25	2500	2.7 (1.2)	9.2 (234)	78

SSR6P25

WARNING

- Airframe tooling can cause flying chips
- Read safety precautions on pages W1 to W2

AVIATION TIRE TOOLS

Tire Gauges

TTL-300-DTG Digital Aircraft Tire Gauge

- 300 PSI Gauge
- 300 PSI Rated Hose
- Accuracy: +/-0.5% Full Scale
- Protective Rubber Boot
- Bleed Valve
- Straight Air Chuck
- Swivel Fitting at Air Chuck
- Plastic Carrying Case

TTL-300-ATG Analog Aircraft Tire Gauge

- 300 PSI Gauge
- 300 PSI Rated Hose
- Accuracy: +/-1% Full Scale
- Protective Rubber Boot
- Straight Air Chuck
- Swivel Fitting at Air Chuck
- Plastic Carrying Case

TTL-300-DTI Digital Aircraft Tire Inflator

- 300 PSI Gauge
- 300 PSI Rated Hose
- Accuracy: +/-0.5% Full Scale
- Protective Rubber Boot
- Safety Relief Valve
- Straight Air Chuck
- Swivel Fitting at Air Chuck
- Optional Clip-on Air Chuck
- Plastic Carrying Case

TTL-300-ATI Analog Aircraft Tire Inflator

- 300 PSI Gauge
- 300 PSI Rated Hose
- Accuracy: +/-1% Full Scale
- Protective Rubber Boot
- Safety Relief Valve
- Straight Air Chuck
- Swivel Fitting at Air Chuck
- Optional Clip-on Air Chuck
- Plastic Carrying Case

TTL-300-DTGK Digital Aircraft Tire Gauge Kit

- 300 PSI
- 0.1 PSI Resolution
- 0.5% FS Tolerance
- Backlit
- Peak Hold
- Tracking Mode
- Bleeder Valve
- Protective Boot
- Quick Disconnect Hoses
- Tire Thread Depth Gage
- Plastic Carrying Case

TTL-3000-ASG Analog Aircraft Strut Inflation Tool

- 3000 PSI Gauge
- 3000 PSI Rated Hose
- 3000 Inlet & Bleed Valve
- Accuracy: +/-1% Full Scale
- Protective Rubber Boot
- T-handle or Gooseneck Fitting
- Plastic Carrying Case

Glow Batons

Traffic Master Glow Batons

- Impact Resistant Top Lens
- Extremely Bright LEDs
- Large Luminous Body Glow
- Economical, no bulbs to replace, LEDs last for over 100,000 hours and are impact resistant
- Two AA batteries provide 25 hours in continuous glow mode
- Slip Resistant Rubber Hand Grip with Wrist Lanyard
- Tough, High Impact, Water Resistant Tube made of durable industrial grade plastic that possess excellent strength and optical qualities
- Lightweight (approximately 6.7 oz., 9 oz. with batteries), High Visibility
- 13-½" long, 6- ⅛" x 1-½" diameter with 360 degrees of luminary surface

Stock No.	Color
GCEGB100-G-A	Amber
GCEGB100-G-B	Blue
GCEGB100-G-G	Green
GCEGB100-G-R	Red



Applications:
Marine and Aircraft Signaling, Search and Rescue Operations, Police and Fire/Rescue Operations, Military Procedures, Traffic and Crowd Control

GCEGB100-G-R

BK8000KIT Digital Inspection Kit

- 4.3" diameter screen is 23% larger for even better viewing
- Digital video and Image capture with internal memory as well as SD card storage
- Dual imager is included - see straight ahead OR at a 90 degree angle
- Wireless 802.11n provides clear image transmission
- Rechargeable lithium batteries in both the viewer and imager
- 3 mega-pixel rear-view camera allows technician to document pre-service vehicle condition
- Touch screen interface enables easy feature selection

Kit Includes:

Stock No.	Description
BK8000	Advanced Digital Scope
ECFLASER90	90 Lumen Flashlight w/ Laser
DPTC24	24 in. Claw Pick-Up Tool
DPTM24	24 in. Magnet Pick-Up
UIM225	2-¼" DIA mirror
PHT5	Magnetic Pick-Up Tool
SHDP311RR	HARD GR Phillips
SHDP631RR	HARD GR Phillips
AAA BATT	1 set of 3 foamed
FOAM	Custom foam
CASE	Hard case

Applications:
Internal engine diagnosis, under-dash, inside door panels, under-hood, behind engine block, inside transmission housings, and any areas not easily accessible by technician.

BK8000 Specifications	
Power Supply	(2) 3.7V Li-ion, 2600mAh 9.6 watt hour battery
Width, Inches (mm)	Viewer: 1.77 (45)
Length, Inches (mm)	Viewer: 7.2 (180); Imager 36 (0.91)
Height, Inches (mm)	Viewer: 3.94 (100)
Resolution (Reading Display)	480 x 272 RGB Backlight LED
Video Out	NTSC/PAL
Run Time (Hours)	3–4 hours on full charge
Operating Temperature Range	32 to 140° F (0 to 60° C)
Storage Temperature	–4 to 140° F (-20 to 60° C)
Field of View, Forward	approx. 56° diagonal
Field of View, Side	approx. 56° diagonal
Resolution	Imager: 640 x 480
Optimal Focal Range	0.5" to 12" (12 cm to 30.5cm)
Water Resistance	Imager only when assembled: to a depth of 10' (3 m)

WARNING

- Airframe tooling can cause flying chips
- Read safety precautions on pages W1 to W2

MASTIC REMOVAL

Scraping Kits & Accessories

NYZ7000S - NYROC® Pneumatic Blade Sharpener

- Pneumatic powered sharpener quickly sharpens all NYROC blades up to 1" width
- Consistently sharpens blades to the optimal 51° angle
- Operates with single push button
- Connects directly to shop air
- Removed material is collected in disposable antistatic vacuum bag attached directly to the discharge chute

NYZ700AD - Abrasive NYROC® Blade Sharpening Discs

- Pack of 10 sharpening discs for use with NYZ7000S blade sharpener

NYZ7004VB - Antistatic Vacuum Bags

- Antistatic vacuum bags for NYZ7000S blade sharpener

NYZ7025H50 - 50' Air Hose (AntiStatic)

- NONSTAT® antistatic ¼" hose is fully grounded to prevent static discharge
- Hose is ideal for environments and projects where static control is essential

NYZ-HOSE 15' - 15' Air Hose (AntiStatic)

- Same as the NYZ7025H100, except 15' long

NYZ7024H100 - 100' Air Hose (AntiStatic)

- Same as the NYZ7025H100, except 100' long

NYZ7000MDKIT - Mastic Removal NYROC® Blade Master Kit

- Save up to 80% of the time and labor involved to remove PRC and other mastics from every area of an aircraft without damage to the substrate
- Speed controllable pneumatic vibration gun permits infi nitely variable job performance
- Completely portable system is fully grounded and antistatic
- Included pneumatic blade sharpener rapidly puts an edge on all NYROC® blades up to 1" width right at the job site
- Kit includes medium duty Vibro gun, pneumatic blade sharpener, one antistatic vacuum bag, one sharpening disc, one manual handle, two 1" NYROC® blades, two 1/2" NYROC® blades, two 1/4" NYROC® blades, blade locks and connecting hoses in padded storage case

NYROC® Blades

- Proprietary engineered plastic specifically formulated for removing difficult-to-remove materials from delicate, fragile and scratch prone surfaces
- Can be used to remove stubborn mastics in aircraft fuel tanks and fuselages, anti-skid patches and appliqués, without damage to aluminum or painted surfaces
- Approved for use on U.S. Air Force, Canadian Air Force and NATO military aircraft

Application	10 Pack Stock No.	200 Pack Stock No.
⅛" General Use	NYZ701810	NYZ7018200
¼" General Use	NYZ701410	NYZ7014200
½" General Use	NYZ701210	NYZ7012200
¾" General Use	NYZ70341	NYZ7034200
1" General Use	NYZ700110	NYZ7001200
1" Button Head Rivet	NYZ701110	NYZ7011200

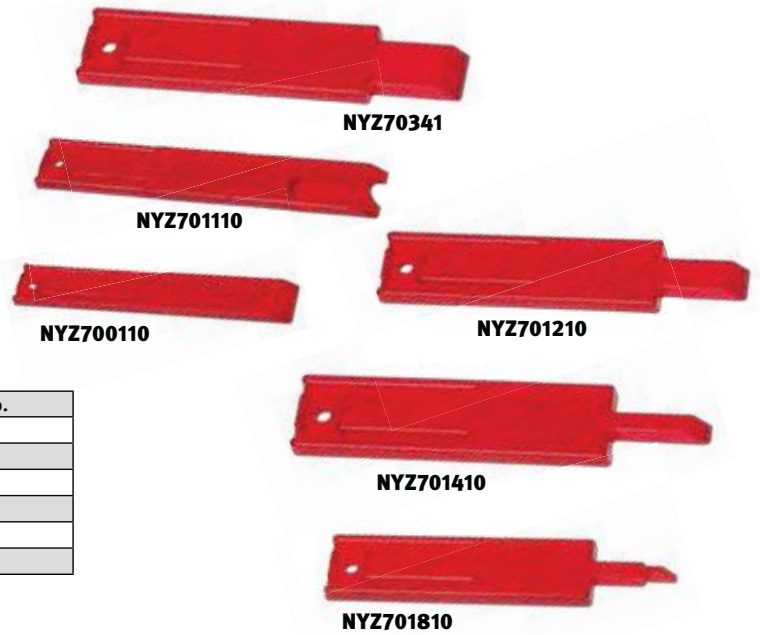

NYZ7026EH - NYROC Blade Holder/Handle

- Vulcanized rubber padded blade holder, works exclusively with NYROC® blades
- Fits comfortably in the user's hand, reduces operator fatigue and helps to prevent injury

NYZ7007HD - Blade Kit

- Hand kit is ideal for aviation use, especially for delicate jobs and projects with awkward or limited access
- NYROC® blades are sharpened with sandpaper, small stone or optional pneumatic sharpener
- Kit includes six 1" NYROC® blades, six ½" NYROC® blades, three ¼" NYROC® blades and ergonomic rubber handle

NYZ7006MG - Vibration Gun Kit

- Kit includes medium duty Vibro gun, 1", ½", and ¼" NYROC® blades (1 ea.) plus blade locks in black kit bag
- Medium duty Bicro gun adds pneumatic power to all scraping jobs using standard NYROC® blades

⚠ WARNING

- Airframe tooling can cause flying chips
- Read safety precautions on pages W1 to W2

AVIATION TOOL SETS

Mastic Removal Scrapers

XNGL Heavy Duty MRO Scrapers

- Stiff plastic scrapers set for MRO maintenance to remove caked on materials in repair and overhaul
- Manufactured from super-tough glass nylon composite for durability and precision

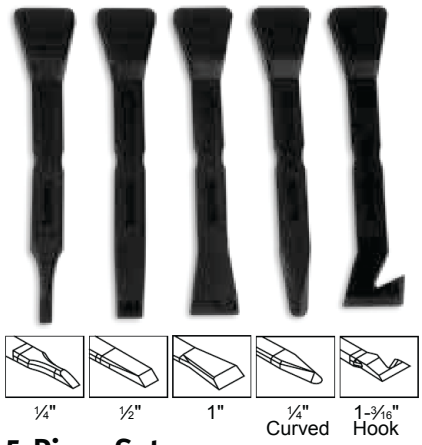

5-Piece Set

PSASET5XNGL

- 5-piece set includes three flat scrapers (¼", ½" & 1"), one ¼" curved scraper and one 1-3⁄16" hook edge scraper

PSA6XNGL

Power Wedge

PSA7XNGL

Forked

PSA8XNGL

¾" Wide

PSA10XNGL

¾" Wide Angled

PSA11XNGL

1-¼" Wide

PSA13XNGL

1" Wide Arched

PSA15XNGL

1-3⁄16" Wide Curved

PSA16XNGL



1-3⁄8" Wide Wedge

PSA29XNGL

2" Wide Wedge

PSA53XNGL

Seat Rail Cleaner

PSA65XNGL



1-3⁄16" Serrated

CELCON® OEM Scrapers

- Plastic scrapers for OEM - new builds
- Manufactured from Celcon® acetal copolymer for outstanding durability and resistance to long-term fatigue, moisture, solvents and strong alkalis
- Ideal for removing new, not hard sealant
- Safe on glass, plexiglas, and polished surfaces

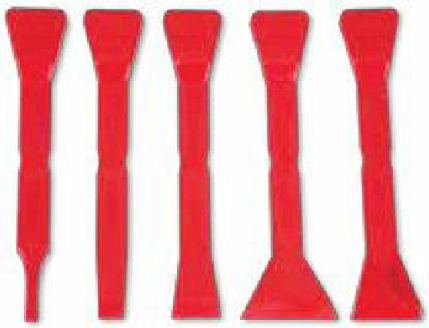

5-Piece Set

PSASET5CEL

- 5-piece set includes four flat scrapers (¼", ½", 1" & 2"), and one 1-3⁄8" double wedge scraper

PSA8CEL

2" Wide Wedge

PSA11CEL

1-¼" Wide

Overview.....N122
Hydraulic Torque Wrenches and Pumps N124
Pneumatic Torque Wrench Accessories N126
Air Drills and Screwdrivers N127
Industrial Heavy-Duty N131
Hydraulics N135

INDUSTRIAL POWER TOOLS

ENERGIZED FOR EVERY SIZE.

No matter how big or small the job, Snap-on provides the industrial power tools to cover the entire range of needs. Every tool is designed under the strict supervision of Snap-on engineers and product specialists, and built to surpass even the most rigorous professional demands. Plus, Snap-on tools always deliver the comfort, reliability and durability you want, and the power and speed you need. No matter what size your job is, Snap-on offers the industrial power tools that get it done right.

SNAP-ON INDUSTRIAL POWER TOOLS PUT THE POWER IN YOUR HANDS IN ANY NUMBER OF WAYS:

RELIABILITY
With Snap-on, you always get the most reliable industrial power tools in the marketplace. By using the best materials, we deliver both durability and performance (speed and accuracy).

SAFETY
Our industrial power tools feature precision-machined gearings, which reduce the usual vibration found in competitive tools with lower quality components. And to further ensure operator safety, Snap-on offers a wide range of additional safety-related product features.

VERSATILITY
The Snap-on Pneumatic and Hydraulic Torque Wrenches are ideal for oil fields, construction, shipyards, power generation, railroads, mining equipment maintenance and more. A variety of high-strength reaction arms are available to fit nearly any application.

HYDRAULIC TORQUE WRENCHES

Snap-on Hydraulic Torque Wrenches

Snap-on hydraulic torque wrenches are some of the most field proven tools in the world market today. They are recommended for all torque applications.
Our one-way ratchet assures...

- Each nut is turned 24 degrees to avoid a slow down due to bolt torsion as fasteners are getting tight.
- Heavily corroded nuts usually create torsion in the bolt. It can be overcome with a second stroke at full torque as the ratchet is a one-way ratchet that does not inadvertently let bolt torsion relax.
- On vertical applications, our tools find their proper reaction point without being held against it.
- Ideal to use four tools to close flanges parallel.

- Compact, ergonomic design for torque requirements up to 37,000 ft-lbs
- High strength metal square drive for performance and durability
- 360 degree rotatable tension absorbing reaction arm for a perfect fit on many jobs
- Uniswivel technology for free movement and positioning of tool and hoses
- Snap-on HTQ wrenches provide plus or minus 3% accuracy

Hydraulic Square Drive Torque Wrenches

Stock No.	Square Drive Size	Torque Range Ft. Lb. (Nm)
HTQ.7	¾"	120-822 (167-1,114)
HTQ1	¾"	190-1,340 (272-1,817)
HTQ3	1"	450-3,230 (657-4,379)
HTQ5	1 ½"	720-5,590 (1,137-7,578)
HTQ8	1 ½"	1,200-8,000 (1627-10,845)
HTQ10	1 ½"	2,200-11,520 (2,343-15,617)
HTQ20	2 ½"	3,050-19,750 (4,018-26,787)
HTQ25	2 ½"	3,960-25,890 (5368-35,096)
HTQ35	2 ½"	5,400-37,100 (7,544-50,293)

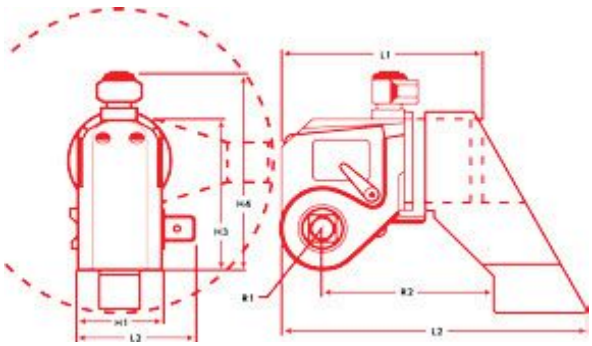

HTQ3

Technical Specifications

Stock No.	L1 Inches (mm)	L2 Inches (mm)	L3 Inches (mm)	H1 Inches (mm)	H2 Inches (mm)	H3 Inches (mm)	H4 Inches (mm)	R1 Inches (mm)	R2 Inches (mm)	Weight lbs (kg)
HTQ.7	3.96 (100.6)	5.98 (151.9)	.93 (23.6)	1.62 (41.2)	2.53 (64.3)	3 (76.2)	4.25 (108)	.81 (20.6)	3.32 (84.3)	2.7 (1.2)
HTQ1	4.88 (123.9)	7.33 (186.2)	1.13 (28.7)	1.97 (50)	2.85 (72.4)	3.66 (93)	4.9 (124.5)	.98 (25)	4.12 (104.7)	3.95 (1.8)
HTQ3	6.34 (161)	9.6 (243.8)	1.51 (38.4)	2.63 (66.8)	3.81 (96.8)	4.88 (124)	6.12 (155.5)	1.31 (33.3)	5.32 (135.1)	8.3 (3.8)
HTQ5	7.61 (193.3)	11.52 (292.6)	1.81 (46)	3.16 (80.3)	4.92 (125)	5.85 (148.6)	7.22 (183.4)	1.57 (39.9)	6.4 (162.6)	14.2 (6.5)
HTQ8	8.43 (214.2)	12.47 (316.73)	1.70 (43.18)	3.57 (90.7)	5.23 (132.8)	6.38 (162)	8.07 (205.2)	1.70 (43.2)	6.97 (177.6)	32.5 (14.75)
HTQ10	9.51 (241.6)	14.38 (365.3)	2.26 (57.4)	3.95 (100.3)	5.62 (142.8)	7.32 (185.9)	8.8 (223.5)	1.96 (48.8)	7.97 (202.4)	24.8 (11.3)
HTQ20	11.41 (298.8)	17.27 (438.7)	2.71 (68.8)	4.73 (120.1)	7.1 (180.3)	8.78 (223)	10.24 (260.1)	2.36 (59.9)	9.58 (243.3)	43.4 (19.7)
HTQ25	6.81 (173.05)	18.52 (470.33)	2.59 (65.87)	5.25 (133.35)	7.57 (192.28)	9.87 (250.69)	11.44 (290.57)	2.50 (65.87)	10.25 (260.35)	75.6 (34.3)
HTQ35	14.03 (356.3)	21.23 (539.2)	3.33 (84.6)	5.82 (147.8)	8.32 (211.3)	10.79 (274.1)	12.36 (313.9)	2.9 (73.7)	11.74 (298.2)	77.45 (35.2)

HYDRAULIC TORQUE WRENCHES

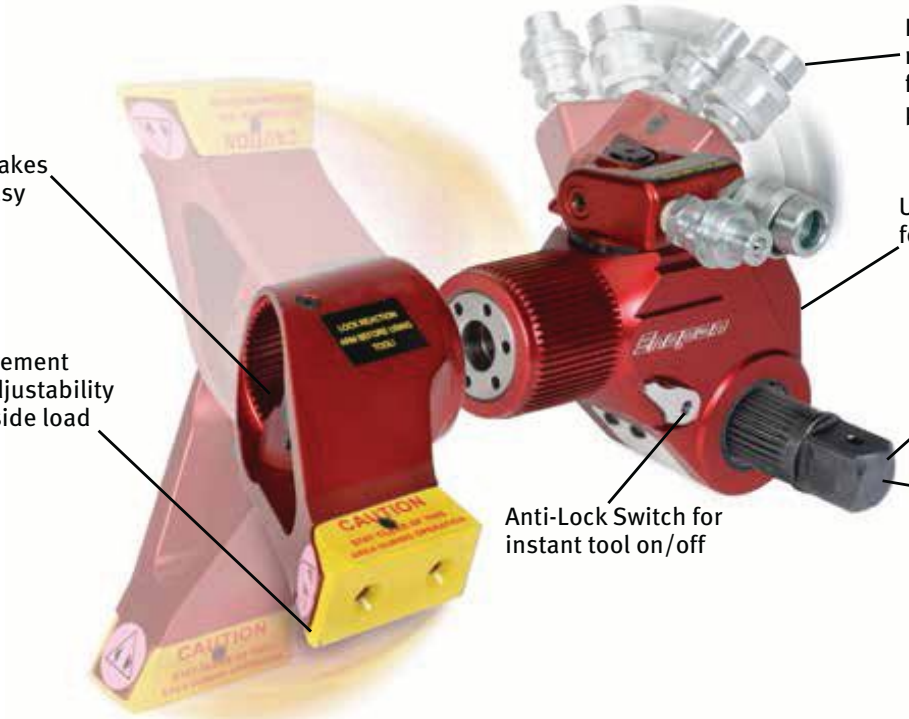

- Limited Over-Stroke Mechanism
- Dual Pawl Mechanism provides problem free operation and equal load ratchet mechanism
- Corrosion free finish
- Piston design prevents side load and the cylinder is maintenance free
- Small operating radius...if a socket fits, the tool fits
- Ergonomic design
- An anti-backlash mechanism is the only way to get full torque on a corroded nut and prevent pre-stall or turning speed slow down. It is a must to operate multiple torque tools with a single hand and your only assurance to get preset torque on all fasteners no matter what!

Hydraulic Pumps

Hydraulic Pumps for Snap-on Hydraulic Torque Wrenches

Stock No.	HTQPP	HTQEP
Description	Air driven power pack	Electric driven power pack (115/230v)
Tank	1 gallon	1 gallon
STAGES	3	3
FLOW RATE	770 cu. In. min	620 cu. In. min
Voltage	N/A	115/230
Amerage (115V)	N/A	15 amp
Amerage (230V)	N/A	7 amp
Air Volume	3800 cu. In/sec	N/A
Gauge	0-10K PSI (+/-1% ACC)	0-10K PSI (+/-1% ACC)

⚠ WARNING

• Read safety precautions on pages W1 to W2

PNEUMATIC TORQUE WRENCH ACCESSORIES

Pneumatic Torque Wrench Reaction Arms

- Use with Snap-on PTQ series pneumatic torque wrenches on page 301
- Rotatable arms can be adjusted 360 degrees for a secure reaction point in many applications **PTQ1-03R, PTQ3-03R, PTQ8-03R**
- Alco arms are long and flat with no offset and work well for applications like I-Beams **PTQ1-ALC7, PTQ3-ALC9, PTQ8-ALC11**
- Long arms work with shallow sockets and provide greater reach than short arms for applications where neighboring studs are further apart **PTQ1-03L, PTQ3-03L**
- Twin tool arms lock two tools together...one tool uses the other as a reaction point while providing the benefit of torqueing two fasteners at once **PTQ1CN612812, PTQ3CN65825**
- Frog Nut Socket for use when torqueing frog nuts with PTQ8 pneumatic wrench on railroad applications **PTQ8-FROG**

PTQ1-03R

PTQ1CN612812

PTQ1-ALC7

PTQ8-FROG

PTQ1-03L

Pneumatic Torque Wrench Stock No.	Reaction Arm Stock No.	Reaction Arm Description	Reaction Arm Length, inches	Reaction Arm Offset, inches
PTQ0.5 PTQ1	PTQ1-03S	Short Arm Included with Wrenches	4.48	2.40
	PTQ1-03R	Rotatable Arm	6.27	2.13
	PTQ1-ALC7	ALCO Arm	7.00	No Offset
	PTQ1-03L	Long Arm	6.02	2.44
	PTQ1CN612812	Twin Tool Arm	6.75–8.75 Adj.	No Offset
PTQ3	PTQ3-03S	Short Arm Included with Wrench	3.3	5.26
	PTQ3-03R	Rotatable Arm	8.2	3.05
	PTQ3-ALC9	ALCO Arm	9.00	No Offset
	PTQ3-03L	Long Arm	7.65	3.3
	PTQ3-CN65825	Twin Tool Arm	6.5–8.25 Adj.	3.25
PTQ8	PTQ8-03	Short Arm Included with Wrench	10.68	4.55
	PTQ8-03R	Rotatable Arm	10.8	4.1
	PTQ8-ALC11	ALCO Arm	11.00	No Offset
	PTQ8-FROG	Frog Nut Tool	8.23	—

Pneumatic Torque Wrench Wheel Torque Accessories

- Use with Snap-on PTQ0.5 and PTQ1 Pneumatic Torque Wrenches on page 301
- Wheel extension and cup combine to create reaction point when torqueing lug nuts on trucks and heavy equipment

Stock No.	Description	Use with Snap-on Sockets:
PTQ1-WTEXT7	7" Wheel Torque Extension For PTQ0.5 and PTQ1 with standard cup to fit 38mm and 1 ½" lugs	N/A
PTQ1-WTEXT12	12" Wheel Torque Extension For PTQ0.5 and PTQ1 with ¾" drive adaptor for mounting reaction cups to wheel torgue extension	N/A
PTQ1-WTEXT34	¾" Drive Adaptor for Mounting Reaction Cups to Wheel Torque Extension	N/A
PTQ1WTCUP482	Standard Cup to Fit 38mm and 1 ½" Lugs	IM482, IMM382
PTQ1WTCUP562	Standard Cup to Fit 41mm and 1 ¾"	IM562, IMM412
PTQ1WTCUPD30	Deep Well Cup to Fit 30mm Lugs	SIMM302
PTQ1WTCPD562	Deep Well Cup to Fit 1 7⁄16" to 1 ¾" Lugs	SIM462, SIM482, SIM522, SIM562
PTQ1WTCPBWD1	Deep Well Cup to Fit 13⁄16" Budd Wheel Studs	BW626A, BWD482
PTQ1WTCPBWD2	Deep Well Cup to Fit 21mm Budd Wheel Studs	BWDM412

PTQ1-WTEXT7

PTQ1WTCUP482

PTQ1WTCPD562

PTQ1WTCUPD30

PTQ1WTCPBWD1

PTQ1WTCPBWD1

Snap-on Industrial drills are used in aviation applications ranging from light assembly to metalworking,. Their powerful five vane motors makes these drills great for drilling applications that contain ferrous and non-ferrous metals, plastics, and composite materials.

Built for durability, their 3 planet gear system delivers superior life and load capacity. The Snap-on Industrial drills offer maximum comfort with reduced operator fatigue by offering a low sound level and low vibration solution. Operator comfort is achieved through the implementation of a light weight aluminum housing and a comfort grip. Drills are available in both reversing and non-reversing pistol grip and lever handle configurations.

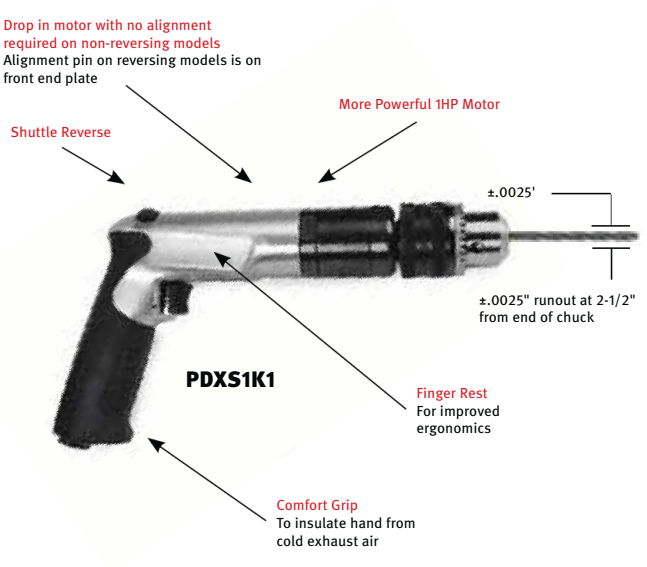

Performance

Powerful 1.0 HP motors easily handle a a wide range of drilling applications

- With excellent run-out characteristics, (+/- 0.0025" @ 2.5" from the end of the chuck) drills provide precision required for critical applications
- Teasing trigger provides excellent speed control

Ergonomics

- Comfortable, compact drill bodies includes finger rests on the side of tool do not protrude which allows trigger actuation with stronger middle finger
- Anatomic design keeps wrist and arm straight, allows high feed forces
- Low noise and vibration levels for comfort in extended use operations

Serviceability

- Drop in motors with no alignment required (applies to non-reversing drills only)
- High part interchangeability = lower service part inventories

Reversible Pistol Grip Air Drills

CE

Style	Stock No. (Keyed Chuck)	Stock No. (Keyless Chuck)	Chuck Capacity in (mm)	Free Speed RPM	Weight lbs (kg)	Length in (mm)	Spindle Thread
1.0 hp (0.75 kw) Reversible	PDXF1K1	PDXF1L1	⅜ (10)	550	3.1 (1.4)	8.6 (220)	⅜"-24
	PDXF1K5	PDXF1L5	⅜ (10)	1500	2.6 (1.15)	7.6 (195)	⅜"-24
	PDXF1K6	PDXF1L6	⅜ (10)	2050	2.6 (1.15)	7.6 (195)	⅜"-24
	PDXS1K1	PDXS1L1	½ (13)	550	3.6 (1.6)	9.1 (230)	½"-20

Non-Reversible Pistol Grip Air Drills

CE

Style	Stock No. (Keyed Chuck)	Stock No. (Keyless Chuck)	Chuck Capacity in (mm)	Free Speed RPM	Weight lbs (kg)	Length in (mm)	Spindle Thread
1.0 hp (0.75 kw)Reversible	PDXT2K7	-	¼ (6)	2600	2.3 (1.05)	6.5 (165)	⅜"-24
	PDXT2K8	-	¼ (6)	3500	2.3 (1.05)	6.5 (165)	⅜"-24
	PDXT2K9	-	¼ (6)	5500	2.3 (1.05)	6.5 (165)	⅜"-24
	PDXF2K0	-	⅜ (10)	450	2.9 (1.3)	8 (205)	⅜"-24
	PDXF2K2	-	⅜ (10)	600	2.9 (1.3)	8 (205)	⅜"-24
	PDXF2K3	PDXF2L3	⅜ (10)	900	2.9 (1.3)	8 (205)	⅜"-24
	PDXF2K4	PDXF2L4	⅜ (10)	1350	2.9 (1.3)	8 (205)	⅜"-24
	PDXF2K7	PDXF2L7	⅜ (10)	2600	2.5 (1.1)	7 (180)	⅜"-24
	PDXF2K8	PDXF2L8	⅜ (10)	3500	2.5 (1.1)	7 (180)	⅜"-24
	PDXF2K9	PDXF2L9	⅜ (10)	5500	2.5 (1.1)	7 (180)	⅜"-24
	PDXS2K0	PDXS2L0	½ (13)	450	3.3 (1.5)	8.5 (215)	½"-20
	PDXS2K2	PDXS2L2	½ (13)	600	3.3 (1.5)	8.5 (215)	½"-20
	PDXS2K3	PDXS2L3	½ (13)	900	3.3 (1.5)	8.5 (215)	½"-20
	PDXS2K4	PDXS2L4	½ (13)	1350	3.3 (1.5)	8.5 (215)	½"-20
	PDXS2K7	PDXS2L7	½ (13)	2600	2.9 (1.3)	7.5 (190)	½"-20

SDR10P26N3

WARNING • Read safety precautions on pages W1 to W2

PRODUCTION AIR DRILLS

Sioux drills are used in applications ranging from light assembly to metalworking, manufactured housing and wood working. Their powerful five vane motors makes these drills great for drilling applications that contain ferrous and non-ferrous metals, wood and composite materials.

Built for durability, their 3 planet gear system delivers superior life and load capacity. The Sioux drills offer maximum comfort with reduced operator fatigue by offering a low sound level and low vibration solution. Operator comfort is achieved through the implementation of a light weight aluminum housing and a comfort grip. Drills are available in both reversing and non-reversing pistol grip and lever handle configurations.

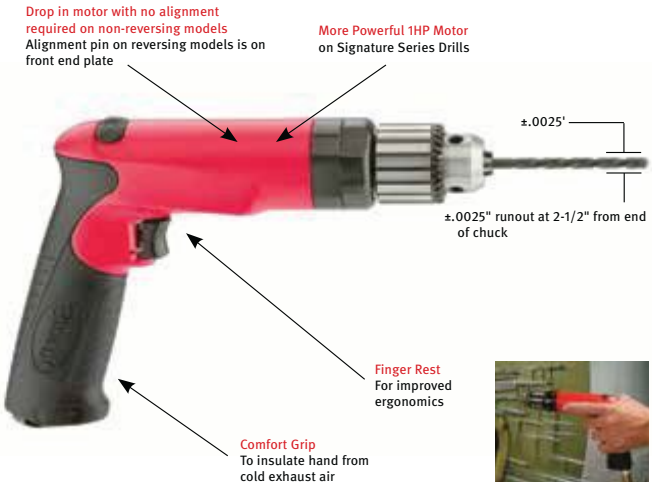

Performance

- Powerful 0.6 HP and1.0 HP motors easily handle a a wide range of drilling applications
- With excellent run-out characteristics, (+/- 0.0025” @ 2.5" from the end of the chuck) Sioux drills provide precision required for critical applications
- Teasing trigger provides excellent speed control

Ergonomics

- Comfortable, compact drill bodies includes finger rests on the side of tool do not protrude which allows trigger actuation with stronger middle finger
- Anatomic design keeps wrist and arm straight, allows high feed forces
- Low noise and vibration levels for comfort in extended use operations

Serviceability

- Drop in motors with no alignment required (applies to non-reversing drills only)
- High part interchangeability = lower service part inventories

Reversible Air Drills

- Pistol Grip (0.6 HP & 1.0 HP) - Shuttle Reverse
- Right Angle Drills (1.0 HP) - Rapid Reverse
- Side to Center = 0.8" (20mm)
- Max Air Consumption:
  - 0.6 HP Drills - 25 scfm (12 l/s)
  - 1.0 HP Drills - 30 scfm (14 l/s)

CE

Style	Stock No.	Chuck Capacity in (mm)	Free Speed RPM	Weight lbs (kg)	Length in (mm)	Spindle Thread	Sound Level dB(A)
1.0 hp (0.75 kw) Pistol Grip Drills - Reversible	SDR10P40R2	¼ (6)	4,000	2.4 (1.1)	7.1 (180)	⅜" - 24	80
	SDR10P25R2	¼ (6)	2,500	2.4 (1.1)	7.1 (180)	⅜" - 24	
	SDR10P20R2	¼ (6)	2,000	2.4 (1.1)	7.1 (180)	⅜" - 24	
	SDR10P40R3	⅜ (10)	4,000	2.6 (1.2)	7.6 (195)	⅜" - 24	
	SDR10P25R3	⅜ (10)	2,500	2.6 (1.2)	7.6 (195)	⅜" - 24	
	SDR10P20R3	⅜ (10)	2,000	2.6 (1.2)	7.6 (195)	⅜" - 24	
	SDR10P7R3	⅜ (10)	700	3.1 (1.4)	8.6 (220)	½" - 20	
	SDR10P5R3	⅜ (10)	500	3.1 (1.4)	8.6 (220)	½" - 20	
	SDR10P3R3	⅜ (10)	300	3.1 (1.4)	8.6 (220)	½" - 20	
	SDR10P20R4	½ (13)	2,000	3.0 (1.4)	7.9 (200)	½" - 20	
	SDR10P7R4	½ (13)	700	3.6 (1.6)	9.1 (230)	½" - 20	
	SDR10P5R4	½ (13)	500	3.6 (1.6)	9.1 (230)	½" - 20	
	SDR10P3R4	½ (13)	300	3.6 (1.6)	9.1 (230)	½" - 20	
1.0 hp (0.75 kw) RIGHT Angle Drills - Reversible	SDR10A20R2	¼ (6)	2,000	2.9 (1.3)	11 (280)	⅜" - 24	78
	SDR10A16R2	¼ (6)	1,600	3.2 (1.4)	12 (305)	⅜" - 24	
	SDR10A20R3	⅜ (10)	2,000	3 (1.35)	11 (280)	½" - 20	
	SDR10A16R3	⅜ (10)	1,600	3.3 (1.5)	12 (305)	½" - 20	
	SDR10A10R3	⅜ (10)	1,000	3.3 (1.5)	12 (305)	½" - 20	
	SDR10A6R3	⅜ (10)	600	3.3 (1.5)	12 (305)	½" - 20	
	SDR10A3R3	⅜ (10)	300	3.3 (1.5)	12 (305)	½" - 20	
	SDR10A10R4	½ (13)	1,000	3.7 (1.7)	12 (305)	½" - 20	
	SDR10A6R4	½ (13)	600	3.7 (1.7)	12 (305)	½" - 20	
	SDR10A3R4	½ (13)	300	3.7 (1.7)	12 (305)	½" - 20	

SDR10P25R3

SDR10A20R3

- Tipper valve and valve seat is easily accessible for service
- Slip fit of front end plate bearing allows easy service of the air motor without disturbing the rotor spacing
- Drop in motor. No alignment necessary (applies to non-reversing drills only)
- Rotor pinion is case hardened to resist wear
- Grease zerk makes it easy to grease the gears without disassembly
- Planetary reduction can be serviced without removing the chuck
- Planet gear pins are slip fit for ease of assembly and disassembly
- Ring gear is machined into the motor retainer for ease of assembly and disassembly
- Interchangeable rotor, cylinder, bearings and endplates. This reduces the number of spare parts tool cribs need to stock

CE

Non-Reversible Air Drills

- Pistol Grip (0.6 HP & 1.0 HP)
- Straight Drills (1.0 HP)
- Right Angle Drills (1.0 HP)
- Side to Center = 0.8" (20mm)

Max Air Consumption:

- 0.6 HP Drills - 25 scfm (12 l/s)
- 1.0 HP Drills - 30 scfm (14 l/s)

SDR10P26N3

SDR10S26N3

SDR10A22N3

Style	Stock No.	Chuck Capacity in (mm)	Free Speed RPM	Weight lbs (kg)	Length in (mm)	Spindle Thread	Sound Level dB(A)
.60 hp (0.45 kw) PISTOL GRIP DRILLS- Non-Reversible	SDR6P60N2	¼ (6)	6,000	2.1 (0.95)	5.8 (145)	⅜"-24	80
	SDR6P40N2	¼ (6)	4,000	2.1 (0.95)	5.8 (145)	⅜"-24	
	SDR6P26N2	¼ (6)	2,600	2.1 (0.95)	5.8 (145)	⅜"-24	
	SDR6P60N3	⅜ (10)	6,000	2.3 (1)	6.3 (160)	⅜"-24	
	SDR6P40N3	⅜ (10)	4,000	2.3 (1)	6.3 (160)	⅜"-24	
	SDR6P26N3	⅜ (10)	2,600	2.3 (1)	6.3 (160)	⅜"-24	
	SDR6P12N3	⅜ (10)	1,200	2.7 (1.2)	7.3 (185)	½"-20	
	SDR6P7N3	⅜ (10)	700	2.7 (1.2)	7.3 (185)	½"-20	
	SDR6P4N3	⅜ (10)	400	2.7 (1.2)	7.3 (185)	½"-20	
	SDR6P26N4	½ (13)	2,600	2.7 (1.2)	6.6 (170)	½"-20	
	SDR6P7N4	½ (13)	700	3.1 (1.4)	7.8 (200)	½"-20	
	SDR6P4N4	½ (13)	400	3.1 (1.4)	7.8 (200)	½"-20	
1.0 hp (0.75 kw) PISTOL GRIP DRILLS- Non-Reversible	SDR10P280N2	¼ (6)	21,000	2.3 (1.05)	6.5 (165)	⅜"-24	80
	SDR10P180N2	¼ (6)	18,000	2.3 (1.05)	6.5 (165)	⅜"-24	
	SDR10P60N2	¼ (6)	6,000	2.3 (1.05)	6.5 (165)	⅜"-24	
	SDR10P40N2	¼ (6)	4,000	2.3 (1.05)	6.5 (165)	⅜"-24	
	SDR10P26N2	¼ (6)	2,600	2.3 (1.05)	6.5 (165)	⅜"-24	
	SDR10P60N3	⅜ (10)	6,000	2.5 (1.1)	7 (180)	⅜"-24	
	SDR10P40N3	⅜ (10)	4,000	2.5 (1.1)	7 (180)	⅜"-24	
	SDR10P26N3	⅜ (10)	2,600	2.5 (1.1)	7 (180)	⅜"-24	
	SDR10P12N3	⅜ (10)	1,200	2.9 (1.3)	8 (205)	½"-20	
	SDR10P7N3	⅜ (10)	700	2.9 (1.3)	8 (205)	½"-20	
	SDR10P4N3	⅜ (10)	400	2.9 (1.3)	8 (205)	½"-20	
	SDR10P26N4	½ (13)	2,600	2.9 (1.3)	7.5 (190)	½"-20	
	SDR10P7N4	½ (13)	700	3.3 (1.5)	8.5 (215)	½"-20	
	SDR10P4N4	½ (13)	400	3.3 (1.5)	8.5 (215)	½"-20	
1.0 hp (0.75 kw) STRAIGHT DRILLS- Non-reversible	SDR10S280N2	¼ (6)	21,000	2.3 (1.05)	8.3 (211)	⅜"-24	78
	SDR10S180N2	¼ (6)	18,000	2.3 (1.05)	8.3 (211)	⅜"-24	
	SDR10S60N2	¼ (6)	6,000	2.3 (1.05)	8.3 (211)	⅜"-24	
	SDR10S40N2	¼ (6)	4,000	2.3 (1.05)	8.3 (211)	⅜"-24	
	SDR10S26N2	¼ (6)	2,600	2.3 (1.05)	8.3 (211)	⅜"-24	
	SDR10S60N3	⅜ (10)	6,000	2.3 (1.05)	8.3 (211)	⅜"-24	
	SDR10S40N3	⅜ (10)	4,000	2.3 (1.05)	8.3 (211)	⅜"-24	
	SDR10S26N3	⅜ (10)	2,600	2.3 (1.05)	8.3 (211)	⅜"-24	
	SDR10S12N3	⅜ (10)	1,200	2.8 (1.25)	9.3 (236)	½"-20	
	SDR10S7N3	⅜ (10)	700	2.8 (1.25)	9.3 (236)	½"-20	
	SDR10S4N3	⅜ (10)	400	2.8 (1.25)	9.3 (236)	½"-20	
	SDR10S4N4	½ (13)	400	2.8 (1.25)	9.3 (236)	½"-20	
1.0 hp (0.75 kw) RIGHT ANGLE DRILLS - Non-Reversible	SDR10A22N2	¼ (6)	2,200	2.9 (1.3)	10.2 (260)	⅜"-24	78
	SDR10A13N2	¼ (6)	1,300	3.2 (1.4)	11.2 (285)	⅜"-24	
	SDR10A22N3	⅜ (10)	2,200	3.0 (1.35)	10.2 (260)	½"-20	
	SDR10A13N3	⅜ (10)	1,300	3.3 (1.5)	11.2 (285)	½"-20	
	SDR10A10N3	⅜ (10)	1,000	3.3 (1.5)	11.2 (285)	½"-20	
	SDR10A4N3	⅜ (10)	400	3.3 (1.5)	11.2 (285)	½"-20	
	SDR10A10N4	½ (13)	1,000	3.7 (1.65)	11.2 (285)	½"-20	
	SDR10A4N4	½ (13)	400	3.7 (1.65)	11.2 (285)	½"-20	

SCREWDRIVERS

Positive Clutch, Adjustable Clutch and Stall Driver Screwdrivers

- Trigger start with conveniently located shuttle reverse
- 3 planet gear system for increased life and load capacity
- Comfortable, compact tool bodies include finger rests on side of tool, allowing trigger actuation with stronger middle finger
- Teasing throttle for excellent control
- Side to Center - 0.8" (20mm)
- Maximum air Consumption – 30 scfm (13 l/s)
- Contact your Snap-on Industrial salesman to request a complete listing of Sioux Screwdrivers and Nutrunners

CE

Clutch Type	Stock No.	Max. Torque (Soft Joint) in. (mm)	Free Speed RPM	Weight lbs (kg)	Length in (mm)	Sound Level dB(A)
1.0 hp (0.75 kw) Positive Clutch Pistol Grip Screwdrivers - torque output varies with force exerted by operator	**SSD10P25PS**	58 (6.5)	2500	2.4 (1.07)	7.3 (185)	80
	SSD10P20PS	80 (9.0)	2000	2.4 (1.07)	7.3 (185)	
	SSD10P12PS	145 (16.4)	1200	2.8 (1.30)	9.1 (231)	
1.0 hp (0.75 kw) Adjustable Clutch Pistol Grip Screwdrivers - when fastener is tight, clutch will ratchet. Adjusting spring pressure will effect final output torque. Offers consistent torque control with little operator reaction	**SSD10P25AC**	60 (6.8)	2500	2.8 (1.25)	8.4 (213)	80
	SSD10P20AC	80 (9.0)	2000	2.8 (1.25)	8.4 (213)	
	SSD10P12AC	120 (13.5)	1200	3.2 (1.45)	10.2 (259)	
	SSD10P7AC	140 (15.8)	700	3.2 (1.45)	10.2 (259)	
	SSD10P5AC	140 (15.8)	500	3.2 (1.45)	10.2 (259)	
	SSD10P3AC	140 (15.8)	300	3.2 (1.45)	10.2 (259)	
1.0 hp (0.75 kw) Stall Drive Pistol Grip Screwdrivers - final torque is reached when resistance of the fastener overcomes the torque output of the motor. Final torque can be influenced by air pressure and/or operator twisting the tool	**SSD10P25S**	58 (6.6)	2500	2.2 (0.98)	6.5 (165)	80
	SSD10P20S	80 (9.0)	2000	2.2 (0.98)	6.5 (165)	
	SSD10P12S	145 (16.4)	1200	2.6 (1.17)	7.5 (191)	
	SSD10P7S	220 (24.9)	700	2.6 (1.17)	7.5 (191)	
	SSD10P5S	325 (36.7)	500	2.6 (1.17)	7.5 (191)	
	SSD10P3S	400 (45.2)	300	2.6 (1.17)	7.5 (191)	

SSD10P20AC

SSD10P20PS

SSD10P20S

SDR10P25R3

SDG7S25F

STXG10S23

SDG10S25F

SAG10S18

Signature Series Die Grinders

- Unmatched performance and real productivity
- Ideal for grinding, cutting, weld dressing, blending & finishing, deburring, surface prep, finishing and cleaning
- Heavy duty dual taper 200 Series Collet provides a secure clamp load and delivers superior run out characteristics CE

Description	Stock No.	Free Speed RPM	Collet Size	Exhaust	Weight lbs (kg)	Length in (mm)	Sound Level dB(A)	Maximum Air Consumption scfm (l/s)
0.70 hp (0.52 kw) - Straight Die Grinders Lever Throttle	**SDG7S25F**	25,000	¼"	Front	1.2 (0.6)	6 (150)	82	25 (12)
	SDG7S18F	18,000	¼"	Front	1.2 (0.6)	6 (150)	82	25 (12)
	SDG7S25M6F	25,000	6mm	Front	1.2 (0.6)	6 (150)	82	25 (12)
	SDG7S18M6F	18,000	6mm	Front	1.2 (0.6)	6 (150)	82	25 (12)
1 hp (0.75 kw) -Straight Die Grinders Lever Throttle	**SDG10S25F**	25,000	¼"	Front	1.7 (0.8)	7.5 (190)	78	30 (14)
	SDG10S18F	18,000	¼"	Front	1.7 (0.8)	7.5 (190)	78	30 (14)
	SDG10S12F	12,000	¼"	Front	1.7 (0.8)	7.5 (190)	78	30 (14)
	SDG10S25R	25,000	¼"	Rear	1.7 (0.8)	7.5 (190)	78	30 (14)
	SDG10S18R	18,000	¼"	Rear	1.7 (0.8)	7.5 (190)	78	30 (14)
	SDG10S12R	12,000	¼"	Rear	1.7 (0.8)	7.5 (190)	78	30 (14)
	SDG10S25M6F	25,000	6mm	Front	1.7 (0.8)	7.5 (190)	78	30 (14)
	SDG10S18M6F	18,000	6mm	Front	1.7 (0.8)	7.5 (190)	78	30 (14)
	SDG10S12M6F	12,000	6mm	Front	1.7 (0.8)	7.5 (190)	78	30 (14)
	SDG10S25M6R	25,000	6mm	Rear	1.7 (0.8)	7.5 (190)	78	30 (14)
	SDG10S18M6R	18,000	6mm	Rear	1.7 (0.8)	7.5 (190)	78	30 (14)
	SDG10S12M6R	12,000	6mm	Rear	1.7 (0.8)	7.5 (190)	78	30 (14)
1 hp (0.75 kw) - Straight Die Grinders Lever Throttle - Extended	**STXG10S23**	23,000	¼"	Rear	2.2 (1.0)	12.1 (308)	78	30 (14)
	STXG10S18	18,000	¼"	Rear	2.2 (1.0)	12.1 (308)	78	30 (14)
	STXG10S12	12,000	¼"	Rear	2.2 (1.0)	12.1 (308)	78	30 (14)
	STXG10S23M6	23,000	6mm	Rear	2.2 (1.0)	12.1 (308)	78	30 (14)
	STXG10S18M6	18,000	6mm	Rear	2.2 (1.0)	12.1 (308)	78	30 (14)
	STXG10S12M6	12,000	6mm	Rear	2.2 (1.0)	12.1 (308)	78	30 (14)
1 hp (0.75 kw) - Right Angle Die Grinders Lever Throttle	**SAG10S12**	12,000	¼"	Rear	2.7 (1.2)	9.0 (230)	78	30 (14)
	SAG10S15	15,000	¼"	Rear	2.7 (1.2)	9.0 (230)	78	30 (14)
	SAG10S18	18,000	¼"	Rear	2.7 (1.2)	9.0 (230)	78	30 (14)
	SAG10S12M6	12,000	6mm	Rear	2.7 (1.2)	9.0 (230)	78	30 (14)
	SAG10S15M6	15,000	6mm	Rear	2.7 (1.2)	9.0 (230)	78	30 (14)
	SAG10S18M6	18,000	6mm	Rear	2.7 (1.2)	9.0 (230)	78	30 (14)

Performance

- Powerful motors deliver consistent power and working speeds (from 12-25,000 RPM) for heavy loads
- Heavy-duty dual-taper collets provide secure clamp loads and deliver superior run out characteristics
- Responsive Teasing Throttles provide excellent control
- Precision Machined Heat Treated Spiral Bevel Gears for smooth operation and maximum life

Ergonomics

- Comfortable, compact tool bodies measure only 1.67" (43mm) in diameter
- Contoured safety levers and ergonomic composite handles with textured grips
- Low noise and vibration levels for comfort in extended use operations

Serviceability

- Drop in motors with no alignment required
- No press fits & no shims = quick easy maintenance
- High part interchangeability = lower service part inventories

All Sioux Signature Series Die Grinders (SDG/SAG/STXG Series) use a heavy duty dual-taper 200 Series collet which provides a secure clamp load and delivers superior run out characteristics.

⚠ WARNING

• Read safety precautions on pages W1 to W2

HEAVY-DUTY GRINDERS

SWG10S1245

1285L

Right Angle Type 27 Wheel Grinders with Lockoff Lever Throttle

- Full 1HP air motor maintains power under load
- Heavy duty gearing for increased life
- Light weight aluminum reinforced nylon housing
- Ergonomic composing handle with soft textured grip
- Side handle can be positioned for left or right handed operators
- Teasing throttle for exceptional control

CE

Description	Stock No.	Free Speed RPM	Wheel Capacity in. (mm)		Weight lbs (kg)		Length in (mm)		Sound Level dB(A)	Air Consumption Under Load cfm (l/s)		Air Consumption Free Speed cfm (l/s)		Spindle Thread
1 hp (0.75 kw)	**SWG10S183**	18,000	3.0	75	2.5	1.1	7.5	190	77	N/A	N/A	35	17	5/8"-24
	SWG10S124	12,000	4.0	100	3.0	1.6	8.3	210	77	N/A	N/A	35	17	3/8"-24
	SWG10S1245	12,000	4.5	115	3.0	1.6	8.3	210	77	N/A	N/A	35	17	5/8"-11
1 hp (0.75 kw) - Governed Speed	**1285L***	6,000	7.0	175	5.9	2.7	12.4	315	85	35	17	18	8	5/8"-11

* NOTE: 1285L is not CE approved

HG20AL-80P3

VG30AL-60C6

VG20AL-60D7

Vertical and Horizontal Wheel Grinders, Governed Speed with Lever Throttle

- Three piece housing construction for ease of maintenance
- Governor controlled
- Lock off lever prevents accidental start up

CE

Description	Stock No.	Free Speed RPM	Wheel Capacity in (mm)	Weight (without guard) lb (kg)	Height (Vertical) Length (Horizontal) in (mm)	Sound Level dB(A)	Air Consumption Under Load cfm (l/s)	Air Consumption Free Speed cfm (l/s)	Spindle Thread
Vertical Type 6 & 11 - 2 hp (1.5 kw)	**VG20AL-60C6**	6000	6 (150)	7.4 (3.3)	5.5 (145)	85	75 (35)	26 (12)	5/8"-11
Vertical Type 6 & 11 - 3 hp (2.2 kw)	**VG30AL-60C6**	6000	6 (150)	9.5 (4.3)	6.4 (165)	84	90 (42)	39 (18)	5/8"-11
Vertical Type 27 - 2 hp (1.5 kw)	**VG20AL-60D7**	6000	7 (175)	7.4 (3.3)	5.5 (145)	85	75 (35)	26 (12)	5/8"-11
	VG20AL-45D9	4500	9 (230)	7.4 (3.3)	5.5 (145)	85	75 (35)	26 (12)	5/8"-11
	VG20AL-60D9	6000	9 (230)	7.4 (3.3)	5.5 (145)	85	75 (35)	26 (12)	5/8"-11
Vertical Type 27 - 3 hp (2.2 kw)	**VG30AL-60D7**	6000	7 (175)	9.5 (4.3)	6.4 (165)	84	90 (42)	39 (18)	5/8"-11
	VG30AL-45D7	4500	7 (175)	9.5 (4.3)	6.4 (165)	84	90 (42)	39 (18)	5/8"-11
	VG30AL-45D9	4500	9 (230)	9.5 (4.3)	6.4 (165)	84	90 (42)	39 (18)	5/8"-11
	VG30AL-60D9	6000	9 (230)	9.5 (4.3)	6.4 (165)	84	90 (42)	39 (18)	5/8"-11
Horizontal 2 hp (1.5 kw)	**HG20AL-60S6**	6000	6 (150)	10.5 (4.8)	20.8 (530)	85	75 (35)	26 (12)	5/8"-11
	HG20AL-45S8	4500	8 (200)	10.5 (4.8)	20.8 (530)	85	75 (35)	26 (12)	5/8"-11
	HG20AL-80P3	8000	3 (75)	10.5 (4.8)	20.8 (530)	85	75 (35)	26 (12)	5/8"-11
Horizontal 3 hp (2.2 kw)	**HG30AL-60S6**	6000	6 (150)	12.5 (5.6)	21.8 (550)	84	90 (42)	39 (18)	5/8"-11
	HG30AL-45S8	4500	8 (200)	12.5 (5.6)	21.8 (550)	84	90 (42)	39 (18)	5/8"-11
	HG30AL-80P3	8000	3 (75)	12.5 (5.6)	21.8 (550)	84	90 (42)	39 (18)	5/8"-11

What are the benefits of a Governed Motor?

- Governed motors maintain maximum working RPMs and provide more power at higher speed.
- Governed motors require less air and control the speed of the wheel, preventing overspeed.

What does the user gain?

- Improved productivity and enhanced operator safety.
- Increased abrasive efficiency and improved service life of consumables.
- Result? Reduced cost.

SC41011AL-C

SC41011AU-N5

SC80910AL-C

Square Shank and Octagon Shank Scalers

- Available with lever or push pull style throttle
- SC4 Series accepts square shank chisels
- SC8 series accepts octagon chisels
- Adjustable housing allows the operator to vary the length of the exposed needles

CE

Stock No.	Type	Shank	Throttle	Stroke Length in (mm)	Bore Diameter in (mm)	Blows per Minute	Weight lb (kg)	Length in (mm)	Side to Center in (mm)	Air Consumption scfm (l/s)
SC80910AL-C	Chisel	Octagon	Lever	1.0 (25)	15/16 (23)	4300	4.0 (1.7)	15.0 (375)	0.8 (20)	12.0 (6)
SC80910AL-N5	Needle	Octagon	Lever	1.0 (25)	15/16 (23)	4300	6.2 (2.7)	17.0 (425)	0.9 (23)	12.0 (6)
SC41011AL-C	Chisel	Square	Lever	1.1 (28)	1.0 (25)	4600	4.6 (2.1)	10.5 (263)	0.9 (23)	12.0 (6)
SC41011AU-C	Chisel	Square	Push-Pull	1.1 (28)	1.0 (25)	4600	4.6 (2.1)	12.0 (300)	0.9 (23)	12.0 (6)
SC41011AL-N5	Needle	Square	Lever	1.1 (28)	1.0 (25)	4600	6.3 (2.9)	15.3 (383)	1.0 (25)	12.0 (6)
SC41011AU-N5	Needle	Square	Push-Pull	1.1 (28)	1.0 (25)	4600	6.3 (2.9)	16.8 (	1.0 (25)	12.0 (6)

SC41011AL-K

SC80910AL-K

SC41011AL-K SC4 Square Shank Scaler Kit

Includes:

- SC4 Lever Needle Scaler
- Additional Set of Needles
- 5/8" x 7" Flat Chisel
- 1-3/8" x 7" Flat Chisel
- 1-3/8" x 7" Spoon Chisel
- Custom Carrying Case

SC80910AL-K SC8 Octagon Shank Scaler Kit

Includes:

- SC8 Needle Scaler
- Additional Set of Needles
- 5/8" x 7" Flat Chisel
- 1-3/8" x 7" Flat Chisel
- 1-3/8" x 7" Spoon Chisel
- Custom Carrying Case

⚠ WARNING

• Read safety precautions on pages W1 to W2

IMPACT WRENCHES

IW75BP-6H



Square drive Thru-hole anvil

Thru-hole anvil for maximum socket security

Sioux Industrial-Duty Pistol Grip Impact Wrenches

- Thru-Hole Anvil for positive socket retention
- Three piece housing construction for ease of maintenance
- Two jaw impact mechanism
- Aluminum handle with steel hammer case
- Suspension bail included
- Down handle exhaust directs air away from the operator
- Conveniently located reverse

CE

Stock No.	Drive Size in (mm)	Bolt Cap. Grade 5 in (mm)	Working Torque Range[1] ft lb (Nm)	Maximum Torque ft lb (Nm)	Blows Per Minute	Free Speed RPM	Weight lb (kg)	Length in (mm)	Side To Center in (mm)	Avg Air Consumption cfm (l/s)
IW75BP-6H	¾ (19)	¾ (19)	800 (1085)	1000 (1356)	1000	5700	11.6 (5.3)	7.6 (193)	1.75 (45)	15 (7)
IW75BP-8H	1 (25)	¾ (19)	825 (1119)	1100 (1492)	1000	5700	11.7 (5.3)	7.6 (193)	1.75 (45)	15 (7)

1Maximum working torque determined by 5-second rundown on appropriate Skidmore-Wilhelm Torque-Tension Tester

IW100HAI-8H

Square drive and Spline Thru-hole anvil

Sioux Industrial-Duty D-Handle Impact Wrenches

- Thru-Hole Anvil for positive socket retention
- 3 piece housing construction for ease of maintenance
- Thru-Hole Anvil for positive socket retention
- Aluminum housing with steel hammer case
- Available with inside or outside trigger
- Conveniently located reverse
- Front exhaust directs air away from the operator
- Side handle included
- Available with 1", 1 ½" and #5 spline anvils and 6" extended anvils

CE

Description	Stock No.	Drive Size in (mm)	Bolt Cap. Grade 5 in (mm)	Working Torque Range[1] ft lb (Nm)	Maximum Torque ft lb (Nm)	Blows Per Minute	Free Speed RPM	Weight lb (kg)	Length in (mm)	Side To Center in (mm)	Avg Air Consumption cfm (l/s)
Inside Trigger	**IW100HAI-8H**	1 (25)	1 ⅜ (35)	1600 (2170)	2000 (2710)	850	5000	22.0 (10.0)	12.4 (315)	2 (51)	38 (18)
	IW100HAI-5S	#5 Spline	1 ⅜ (35)	1600 (2170)	2000 (2710)	850	5000	22.0 (10.0)	12.4 (315)	2 (51)	38 (18)
	IW150HAI-12H	1 ½ (38)	2 (50)	2500 (3390)	3000 (4070)	650	3750	33.1 (15.0)	14.5 (368)	2.5 (65)	60 (28)
	IW150HAI-5S	#5 Spline	2 (50)	2500 (3390)	3000 (4070)	650	3750	33.1 (15.0)	14.5 (368)	2.5 (65)	60 (28)
Inside Trigger - with 6" Extended Anvil	**IW100HAI-8H6**	1 (25)	1 ⅜ (35)	1600 (2170)	2000 (2710)	850	5000	26.2 (11.8)	18.4 (467)	2 (51)	38 (18)
	IW100HAI-5S6	#5 Spline	1 ⅜ (35)	1600 (2170)	2000 (2710)	850	5000	26.2 (11.8)	18.4 (467)	2 (51)	38 (18)
Outside Trigger	**IW100HAO-8H**	1 (25)	1 ⅜ (35)	1600 (2170)	2000 (2710)	850	5000	22.0 (10.0)	12.4 (315)	2 (51)	38 (18)
	IW100HAO-5S	#5 Spline	1 ⅜ (35)	1600 (2170)	2000 (2710)	850	5000	22.0 (10.0)	12.4 (315)	2 (51)	38 (18)
	IW150HAO-12H	1 ½ (38)	2 (50)	2500 (3390)	3000 (4070)	650	3750	33.1 (15.0)	14.5 (368)	2.5 (65)	60 (28)
	IW150HAO-5S	#5 Spline	2 (50)	2500 (3390)	3000 (4070)	650	3750	33.1 (15.0)	14.5 (368)	2.5 (65)	60 (28)
Outside Trigger - with 6" Extended Anvil	**IW100HAO-8H6**	1 (25)	1 ⅜ (35)	1600 (2170)	2000 (2710)	850	5000	26.2 (11.8)	18.4 (467)	2 (51)	38 (18)
	IW100HAO-5S6	#5 Spline	1 ⅜ (35)	1600 (2170)	2000 (2710)	850	5000	26.2 (11.8)	18.4 (467)	2 (51)	38 (18)

1Maximum working torque determined by 5-second rundown on appropriate Skidmore-Wilhelm Torque-Tension Tester

Hand Pumps

- **JHWHS2S35, JHW5HS2S100 and JHW5HS2S200** feature 2 speed operation
- Pressure relief valve for overload protection
- Load release valve for single acting cylinder usage

JHW5HS2S35

Used with Cylinder	Pump Type	Usable Oil Capacity (in3)	Stock No.	Pressure Rating (psi)		Oil Displacement per Stroke (in3)		Max. Operating Force (lbs)	Piston Stroke (in)	Oil Outlet Port
				1st Stage	2nd Stage	1st Stage	2nd Stage			
Single Acting	Single-speed	36.5	**JHW5HS1S60**		10,000		0.15	109	0.79	⅜"-18NPTF
	Two-speed	21.4	**JHW5HS2S35**	200		0.18	0.05	88	0.38	¼"-18NPTF
		61.0	**JHW5HS2S100**			0.81	0.14	132	0.82	⅜"-18NPTF
		128.0	**JHW5HS2S200**							

Electric Pumps

- Quiet operation meets OSHA regulations (80dBA)
- 2 speed operation allows for faster cylinder advance
- Full load starting capacities
- Internal filter keeps contamination from damaging pump
- Ideal for on site construction as well as maintenance

JHW5E10H2G

Motor Size (hp)	Usable Oil Capacity (gal)	Stock No.	Stock No. with Remote Control Pendant Switch	Max. Output Pressure (psi)	Oil Output Flow Rate (in3)		Valve Type	Valve Function	Current Draw (amps)	Motor Voltage (volts)	Sound Level (dBA)
					1st Stage	2nd Stage					
0.5	1.0	**JHW5E05H1G**	**JHW5E05H1GR**	10,000	293	18	4-way, 3-pos.	Advance Hold Return	8	115	80
1.0	2.0	**JHW5E10H2G**	**JHW5E10H2GR**		311	37			15		
1.5	3.0	**JHW5E15H3G**	**JHW5E15H3GR**		470	61			17		

Air Pumps

- High strength reinforced aluminum alloy reservoir is lightweight and corrosion resistant
- Pressure relief valve for overload protection
- Suggested air pressure range: 90-175 psi / 6-12 bar
- Designed to be used with single acting cylinders
- JHW5AS200 offers a turbo function that features high flow at high pressure condition
- JHW5AD150M offers a 4-way control valve for operation of double acting cylinders
- Maximum working pressure: 10,000 psi / 700 bar

JHW5AS150

- High strength reinforced aluminum alloy reservoir is lightweight and corrosion resistant
- Pressure relief valve for overload protection
- Suggested air pressure range: 90-175 psi / 6-12 bar
- Designed to be used with single acting cylinders
- JHW5AS200 offers a turbo function that features high flow at high pressure condition
- JHW5AD150M offers a 4-way control valve for operation of double acting cylinders
- Maximum working pressure: 10,000 psi / 700 bar

JHW5AS380L

Used with Cylinder	Usable Oil Capacity (in3)	Stock No.	Pressure Rating (psi)	Oil Output Flow Rate (in3/min)		Input Air Pressure Range (psi)
				No Load	Load	
Single Acting	36.6	**JHW5AS60**	10,000	61	9	100-200
	91.5	**JHW5AS150**	10,000	66	11	100-200
	122.1	**JHW5AS200**	10,000	65	12	100-200
	231.9	**JHW5AS380**	10,000	65	11	100-200
	91.5	**JHW5AS150L**	10,000	61	10	100-200
	231.9	**JHW5AS380L**	10,000	61	10	100-200
Double Acting	91.5	**JHW5AD150M**	10,000	66	11	100-200

⚠ WARNING • Read safety precautions on pages W1 to W2

Complete selection of Williams Industrial Hydraulics available at www.jhwilliamstoolgroup.com

PUMP AND CYLINDER COMBOS

WILLIAMS®

Williams Hydraulics

- Great value, combining high quality with competitive prices
- State-of-the-art design, engineering, and construction combine to create superior tools that work better and last longer
- All parts are machined on CNC and NC machines for maximum precision
- Components are cleaned ultrasonically prior to assembly to ensure the highest quality
- All welds are performed robotically for maximum precision
- 100% functional QC testing is done on all products
- Quality features create tools that work better and last longer
- Hard-chrome plated rams prevent scratching and corrosion
- Steel stop rings for ram over travel protection
- Pressure relief valves for overload protection
- Cylinders are burnish rolled for a smooth precision mirror finish, which reduces scoring and prolongs seal life
- All items are interchangeable with other leading companies' models for maximum versatility
- Ideal for on site construction as well as maintenance

Pump & Cylinder Combos

Cylinders and Specifications					Combination Set Model Number With Hand Pump:			Combination Set Model Number With Air Pump:		
Type	Cylinder Capacity	Cylinder Stock No.	Stroke	Collapsed Height	5HS2S35	5HS2S100	5HS2S200	5AS150	5AS150L	5AS380
Single Acting	5	JHW6C05T05	5.08	8.7	JHW1HP05T05					
Single Acting	10	JHW6C10T02	2.01	4.84		JHW1HP10T02		JHW1AP10T02		
Single Acting	10	JHW6C10T06	5.94	9.84		JHW1HP10T06		JHW1AP10T06	JHW1AP10T06L	
Single Acting	10	JHW6C10T10	9.96	13.86		JHW1HP10T10		JHW1AP10T10	JHW1AP10T10L	
Single Acting	10	JHW6CT10T06	5.95	11.46		JHW1HP10T06T		JHW1AP10T06T	JH1AP10T06TL	
Single Acting	10	JHW6CT10T10	9.96	15.47		JHW1HP10T10T		JHW1AP10T10T	JH1AP10T10TL	
Single Acting	15	JHW6C15T04	3.86	8.66		JHW1HP15T04		JHW1AP15T04		
Single Acting	15	JHW6C15T06	5.87	10.67		JHW1HP15T06		JHW1AP15T06		
Single Acting	25	JHW6C25T02	2.01	6.82		JHW1HP25T02		JHW1AP25T02		
Single Acting	25	JHW6C25T04	3.94	8.78		JHW1HP25T04		JHW1AP25T04		
Single Acting	25	JHW6C25T06	5.94	10.79		JHW1HP25T06		JHW1AP25T06		
Single Acting	25	JHW6C25T08	7.95	12.8			JHW1HP25T08	JHW1AP25T08		
Single Acting	55	JHW6C55T06	6.25	11.13			JHW1HP55T06	JHW1AP55T06		
Single Acting	100	JHW6C100T06	6.63	13.25						JHW1AP100T06
Single Acting Low Profile	10	JHW6CL10T01	1.5	3.48	JHW1HP10T01L			JHW1AP10T01L		
Single Acting Low Profile	20	JHW6CL20T02	1.75	3.9	JHW1HP20T02L			JHW1AP20T02L		
Single Acting Low Profile	30	JHW6CL30T02	2.44	4.61		JHW1HP30T02L		JHW1AP30T02L		

Matched sets provide a combination of components for single acting cylinder applications. Ordering is as easy as 1, 2, 3:

1. Select the cylinder you want
2. Select the pump you want
3. Choose the set number

Air Pump and Single-Acting Cylinder Matching Chart

Capacity (Tons) Stroke (in)	5	10	15	25	30	55	75	100
<1.00								
1.00								
2.00								
3.00								
4.00								
5.00								
6.00								
7.00								
8.00								
9.00								
10.00								
12.00								
13.00								
14.00								
	JHW5AS60	JHW5AS150				JHW5AS380		

Note: Selection based on oil capacity requirements of cylinders.

Not Recommended

Hand Pump / E-Pump and Single-Acting Cylinder Matching Chart

Capacity (Tons) Stroke (in)	5	10	15	25	30	55	75	100
sdf<1.00								
1.00								
2.00								
3.00								
4.00								
5.00								
6.00								
7.00								
8.00								
9.00								
10.00								
12.00								
13.00								
14.00								
	JHW5HS2S35	JHW5HS2S100		JHW5HS2S200		JHW5E10H2G		

Note: Selection based on oil capacity requirements of cylinders.

⚠ WARNING • Read safety precautions on pages W1 to W2

HYDRAULIC CYLINDERS

Single Acting Cylinders

- 39 models
- Internal plunger threads
- Snap in grooved saddles
- Rod wiper seals out dirt and contamination
- Collar fixture threads
- Two base mounting holes on most models
- High strength steel construction from gun drilled solid bar
- High flow 3/8" NPTF couplers
- Collar thread protector
- One piece high grade alloy bearing for side load protection and long life
- Polyurethane cup seal provides optimum performance
- Industrial hard chrome plated ram helps prevent rust and corrosion
- Solid steel cylinder body
- Heavy duty return spring provides quicker retraction
- Ideal for lifting and pressing
- Maximum working pressure: 10,000 psi / 700 bar

Cylinder Capacity (tons)	Stroke (in)	Stock No.	Cylinder Effective Area (in2)	Pressure at Capacity (psi)	Oil Capacity (in3)	Collapsed Height (in)
5	0.63	JHW6C05T00	1.10	9,090	0.69	1.61
	1.00	JHW6C05T01	1.00	10,000	1.00	4.58
	3.07	JHW6C05T03			3.07	6.65
	5.08	JHW6C05T05			5.08	8.70
	7.09	JHW6C05T07			7.09	10.71
	9.09	JHW6C05T09			9.09	12.72
10	1.00	JHW6C10T01	2.24	8,930	2.24	3.62
	2.01	JHW6C10T02			4.50	4.84
	4.02	JHW6C10T04			9.00	6.85
	5.94	JHW6C10T06			13.31	9.84
	7.95	JHW6C10T08			17.81	11.85
	9.96	JHW6C10T10			22.31	13.86
	11.97	JHW6C10T12			26.81	15.87
	14.02	JHW6C10T14			31.40	17.72
15	0.99	JHW6C15T01	3.14	9,550	3.11	4.88
	2.01	JHW6C15T02			6.31	5.87
	3.98	JHW6C15T04			12.50	7.87
	5.87	JHW6C15T06			18.43	10.67
	7.87	JHW6C15T08			24.71	12.68
	9.88	JHW6C15T10			31.02	14.69
	12.01	JHW6C15T12			37.71	16.65
	14.02	JHW6C15T14			44.02	18.66
25	1.02	JHW6C25T01	5.14	9,730	5.24	5.84
	2.01	JHW6C25T02			10.33	6.82
	3.94	JHW6C25T04			20.25	8.78
	5.94	JHW6C25T06			30.53	10.79
	7.95	JHW6C25T08			40.86	12.80
	9.96	JHW6C25T10			51.19	14.80
	12.24	JHW6C25T12			62.91	16.73
	14.25	JHW6C25T14			73.25	18.74
30	8.27	JHW6C30T08	6.49	9,240	53.67	15.24
55	2.01	JHW6C55T02	10.99	10,000	22.09	6.93
	3.98	JHW6C55T04			43.74	8.94
	6.22	JHW6C55T06			68.36	11.14
	13.27	JHW6C55T13			145.84	18.15
75	6.14	JHW6C75T06	16.10	9,320	98.85	11.22
	13.11	JHW6C75T13			211.07	19.37
100	6.61	JHW6C100T06	20.57	9,720	135.97	14.06
	10.24	JHW6C100T13			210.64	17.68

JHW6C05T05

JHW6C55T06

Maintenance Kits

- Sets are portable for easy use in the plant or on the job site
- Custom fitted, rugged blow molded storage case
- 10 ton set case has wheels for easy movement
- Designed for applications of pushing, spreading, pressing and more
- Pumps are rated from 8,000 to 10,000 psi

Capacity (tons)	Stock No.	Ram Specifications		Number of Attachments
		Collapsed Height (in)	Extended Height (in)	
4	**JHW4M04T**	11.00	15.75	14
10	**JHW4M10T**	13.63	19.75	13

NOTE: capacity may be reduced when extension tubes and attachments are used

JHW4M10T

Maintenance Kit Contents:

Stock No.	JHW4M04T	JHW4M10T
Hand Pump	X	X
Ram	X	X
Hose Assembly	X	X
Hose Coupler	X	X
Ram Coupler	X	X
Case	X	X
Hydraulic Spreader	X	X
Combination Head	X	X
Rubber Head	X	X
Ram Toe	X	X
Plunger Toe	X	X
Flat Base	X	X
Serrated Saddle	X	X
Wedge Head	X	X
Male Connector	X	X
Extension Tubes Included:	3"	4"
	6 ⅛ "	10"
	8 ½ "	18"
	16 ½ "	27"
	19 ½ "	

Side Pump Bottle Jacks

- Hydraulic system is protected from internal damage by a patented by-pass mechanism
- Machined and polished cylinders with die-cut threads provide non-abrasive leak-free, durable performance
- Fabricated from hard-cast steel with heat-treated critical stress areas
- Serrated heat-treated saddle provides generous lifting area and secure grip
- Heat-treated extension screw allows low pick-up height adjustment and maximum lift height
- U.S. patented built-in by-pass device protects hydraulic system from overpumping damage
- Unique cross-type forged release valve assures positive control
- A wide, rugged base provides stability and strength
- Critical stress points are reinforced in all models for added durability and dependability
- Economically priced for maximum value

JHW3S12TV

Capacity (tons)	Stock No.	Min Height (in)	Max. Height (in)	Extension Screw (in)	Hydraulic Lifting (in)	Base Size (LxW)Inches
12	**JHW3T12TV**	9.5	18.63	3.13	6	5.25 x 5.13
12	**JHW3S12TV**	6	10.63	1.63	3	5.25 x 5.13
20	**JHW3T20TV**	9.5	18.63	3.13	6	6.25 x 5.88
20	**JHW3S20TV**	6.5	11.25	1.63	3.13	6.25 x 5.88

⚠ WARNING

• Read safety precautions on pages W1 to W2

HYDRAULIC SPECIALTY TOOLS

JHW4T10T

JHW4T06T

Toe Jacks

- Heat treated and chrome plated medium-carbon steel cylinder
- Chrome plated ram promotes longer seal life and optimum performance
- U.S. Patented by-pass device protects hydraulic system from over traveling damage

Capacity (tons)	Stock No.	Toe Saddle		Head Saddle		Hydraulic Lift
		Min Height (in)	Max. Height (in)	Min Height (in)	Max height (in)	
6	JHW4T06T	.88	6.00	10.50	15.63	5.13
10	JHW4T10T	1.13	6.25	11.00	16.13	5.13

Flat Body Cylinder Kits

- Kits include a variety of height magnetic adapters
- Perfect for low clearance areas needing a cylinder height boost
- Maximum working pressure: 10,000 psi / 700 bar
- Kits include magnetic adapters and carrying case
- Cylinders may be ordered separately

JHW6CF05T03TB

Cylinder Capactiy	Stroke	Complete Kit Stock No.	Cylinder Model	Oil Capacity (in3)	Collapsed Height (In)
5	0.24	JH6CF05T03TB	JHW6CF05T03	0.26	1.26
10	0.43	JH6CF10T05TB	JHW6CF10T05	1.02	1.69
20	0.43	JH6CF20T05TB	JHW6CF20T05	1.90	2.01
30	0.51	JH6CF30T05TB	JHW6CF30T05	3.32	2.31

Flat Body Cylinder Mounting Hole Dimensions

- Made of high quality steel
- Extremely low collapsed height for applications with minimal clearance at the lift point
- Great for areas of low clearance
- Maximum working pressure 10,000 psi / 700 bar

JHW6CF05T03

Stock No.	Hole Pitch	Counter Bore Dia.	Counter Bore Depth	Min Height (in)
JHW6CF05T03	1.12	0.2	0.31	0.17
JHW6CF10T05	1.44	.028	0.42	0.31
JHW6CF20T05	1.94	0.4	0.59	0.39
JHW6CF30T05	2.06	0.4	0.62	0.44

Spreaders

- Designed to operate in confined space where expansion is needed
- Compact size makes for easy use in hard to reach places
- Positive over travel stops and return spring
- Connects directly to pump hose with high flow coupler
- Maximum working pressure: 10,000 psi/ 700 bar

Cylinder Capacity (tons)	Stock No.	Cylinder Effective Area (in^2)	Oil Capacity (in^3)
0.5	**JHW6S.5T03**	1.22	0.58
1	**JHW6S01T03**	1.09	0.86

JHW6S01T03

JHW6S.5T03

55/100 Ton Shop Presses

- Heavy steel welded construction
- Multi-position bed for work height adjustment
- Ideal for the removal or installation of gears, universal joints, pulleys, wrist pins, and other press jobs
- Excellent for bending, bonding or straightening applications

Capacity (tons)	Stock No.	Pump Type	Pump Model
55	**JHW9A55T06**	Air	**JHW5AS150**
	JHW9E55T06	Electric	**JHW5E05H1GR**
	JHW9H55T06	Manual	**JHW5HS2S200**
	JHW9A55T13	Air	**JHW5AS380**
	JHW9E55T13	Electric	**JHW5E05H1GR**
100	**JHW9E100T10**	Electric	**JHW5E10H2GR**

JHW9E100T10

⚠ WARNING

• Read safety precautions on pages W1 to W2

HYDRAULIC ACCESSORIES

WILLIAMS®

Gauges

Gauge Type	Stock No.	Face Dia. (in)	Thread (in)	Pressure Range		Graduation			
						Major Graduation	Minor Graduation	Major Graduation	Minor Graduation
				(psi)	(bar)	(psi)		(bar)	
Wet	JHW8G025W	2.50	¼"-18NPTF	0-10,000	0-700	1,000	100	100	10
	JHW8G04W	4.00				2,000	200		

JHW8G04W

Gauge Adaptors

Stock No.	A (in)	B (in)	C (in)	D (in)	E (in)	F (in)
JHW8FG38MF	5.12	1.38	¼"-18NPTF	⅜"-18NPTF	⅜"-18NPTF	1.25

JHW8FG38MF

Adapters

Stock No.	Description	Male Thread	Female Thread	Dimensions (in)	
		C	D	A	B
JHW8FR38M25F	Adapter	¼"-18NPTF	⅜"-18NPTF	1.39	0.91
JHW8FB25F38M	Bushing	⅜"-18NPTF	¼"-18NPTF	0.87	0.67

JHW8FB25F38M

JHW8FR38M25F

Hydraulic Hoses

Stock No.	Hose I.D. (in)	Hose End Fittings	Operating Pressure (psi)	Hose Length (ft)	Weight (lbs)
JHW8H2525D06	¼"	¼"-18NPTF	10,000	6	2.5
JHW8H3825D06		⅜"-18NPTF		6	3.0
JHW8H3825D10				10	5.0
JHW8H3825D20				20	10.5
JHW8H2538D06	⅜"	¼"-18NPTF		6	3.2
JHW8H3838D06		⅜"-18NPTF		6	3.5
JHW8H3838D10				10	6.5
JHW8H3838D20				20	13.5

JHW8H2525D06

Hydraulic Oil

Stock No.	Volume (gal)	Viscosity Index (min)	Viscosity @ 100°F (S.U.S.)	Viscosity @ 210°F (S.U.S.)	ASTM Grade	Flash Point (°F)	Pour Point (°F)	API Gravity
JHW8H1G	1	144	234	53	215	403	-33	30.8

JHW8H1G

Couplers

Coupler Type	Stock No.		
	Complete Set	Male Half	Female Half
High-Flow Coupler	JHW8RH38D	JHW8RH38DM	JHW8RH38DF
Regular-Flow Coupler	JHW8R38D	JHW8R38DM	JHW8R38DF

JHW8R38D

JHW8RH38DM

JHW8RH38D

Single Acting RC-Series Cylinders

- For most lifting applications
- Designed for use in all positions
- ENECR400 Coupler and Dust Cap included on all models

Stock No.	Cylinder Capacity (tons)	Stroke (in)	Oil Capacity (cu.in.)	Collapsed Height (in)	Weight (lbs)
ENERC50	5	0.63	0.62	1.63	2.2
ENERC51	5	1	0.99	4.34	2.3
ENERC53	5	3	2.98	6.5	3.3
ENERC55	5	5	4.97	8.5	4.1
ENERC57	5	7	6.96	10.75	5.3
ENERC59	5	9.13	9.07	12.75	6.1
ENERC101	10	1	2.24	3.53	4
ENERC102	10	2.13	4.75	4.78	5.1
ENERC104	10	4.13	9.23	6.75	7.2
ENERC106	10	6.13	13.7	9.75	9.8
ENERC108	10	8	17.89	11.75	12
ENERC1010	10	10.13	22.65	13.75	14
ENERC1012	10	12	26.84	15.75	15
ENERC1014	10	14	31.31	17.75	18
ENERC151	15	1	3.14	4.88	7.2
ENERC152	15	2	6.28	5.88	9
ENERC154	15	4	12.57	7.88	11
ENERC156	15	6	18.85	10.69	15
ENERC158	15	8	25.13	12.69	18
ENERC1510	15	10	31.42	14.69	21
ENERC1512	15	12	37.7	16.69	24
ENERC1514	15	14	43.98	18.69	26
ENERC251	25	1	5.16	5.5	13
ENERC252	25	2	10.31	6.5	14
ENERC254	25	4	20.63	8.5	18
ENERC256	25	6.25	32.23	10.75	22
ENERC258	25	8.25	42.55	12.75	27
ENERC2510	25	10.25	52.86	14.75	31
ENERC2512	25	12.25	63.18	16.75	36
ENERC2514	25	14.25	73.49	18.75	39
ENERC308	30	8.25	53.56	15.25	40
ENERC502	50	2	22.09	6.94	33
ENERC504	50	4	44.18	8.94	42
ENERC506	50	6.25	69.03	11.13	51
ENERC5013	50	13.25	146.34	18.13	83
ENERC756	75	6.13	97.41	11.25	65
ENERC7513	75	13.13	208.74	19.38	130
ENERC1006	100	6.63	136.67	14.06	130
ENERC10010	100	10.25	211.45	17.69	160

Additional sizes and styles, including aluminum cylinders, are available. Contact your Snap-on Industrial Representative or Customer Service for more information about Enerpac hydraulic equipment.

In addition to the offering shown here, Snap-on Industrial offers Enerpac's full line of hydraulic tools & equipment

Single Acting Pump and Cylinder Sets

- Optimum match of individual components
- All sets include cylinder, hand or air pump, 6' safety hose, calibrated gauge and gauge adaptor
- The quickest and easiest way to start working right away

Stock No.	Set Capacity (tons)	Cylinder Stroke Length (in)	Pump Type Included
ENESCR55H	5	5	Two-Speed Hand
ENESCR102H	10	2.13	Two-Speed Hand
ENESCR106H	10	66.13	Two-Speed Hand
ENESCR154H	15	4	Two-Speed Hand
ENESCR156H	15	6	Two-Speed Hand
ENESCR252H	25	2	Two-Speed Hand
ENESCR254H	25	4	Two-Speed Hand
ENESCR256H	25	6.25	Two-Speed Hand
ENESCR2514H	25	14.25	Two-Speed Hand
ENESCR506H	50	6.25	Two-Speed Hand
ENESCR1006H	100	6.63	Two-Speed Hand

⚠ WARNING

• Read safety precautions on pages W1 to W2

HYDRAULIC CYLINDERS

ENERPAC Hydraulic Technology Worldwide

RCH-Series Hollow Cylinders

- Versatile: for testing, maintenance, and tensioning applications
- Hollow plunger design allows for both pull and push forces
- Nickel-plated, floating center tube on models over 20 tons
- ENERCH121 has ENEFZ1630 Reducer and ENEAR630 Coupler, all other models feature ENECR400 Coupler

Cylinder Capacity (tons)	Stroke (in)	Stock No.	Oil Capacity (cu.in.)	Collapsed Height (in)	Weight (lbs)
12	0.31	**ENERCH120**	0.86	2.19	3
12	1.63	**ENERCH121**	4.49	4.75	6
12	3.00	**ENERCH123**	8.29	7.25	10
20	2.00	**ENERCH202**	9.46	6.38	17
20	6.10	**ENERCH206**	28.67	12.05	31
30	2.50	**ENERCH302**	18.05	7.03	24
30	6.13	**ENERCH306**	44.23	13.00	48
60	3.00	**ENERCH603**	38.2	9.75	62
60	6.00	**ENERCH606**	76.41	12.75	78

Flat and Low Height Cylinders

RSM-Series Flat-Jac® Cylinders

- Compact, flat design for use where other cylinders will not fit
- Stroke is less than 1”
- ENERSM1000 includes handle
- ENECR400 Coupler and Dust Cap included on all models RCS-Series Low Height Cylinders
- Lightweight, low profile design for use in confined spaces
- Stroke range: 1.50 to 2.25”
- ENECR400 Coupler and Dust Cap included on all models
- ENERCS1002 includes handle

	Stock No.	Cylinder Capacity (tons)	Stroke (in)	Oil Capacity (cu.in.)	Collapsed Height (in)	Weight (lbs)
RSM-Series Flat-Jac® Cylinders	**ENERSM50***	5	0.25	0.25	1.28	2.3
	ENERSM100	10	0.44	0.98	1.69	3.1
	ENERSM200	20	0.44	1.94	2.03	6.8
	ENERSM300	30	0.5	3.25	2.31	10
	ENERSM500	50	0.63	6.01	2.63	15
	ENERSM1000	100	0.63	12.27	3.38	32
RCS-Series Low Height Cylinders	**ENERCS101**	10	1.5	3.35	3.47	9
	ENERCS201	20	1.75	7.75	3.88	11
	ENERCS302	30	2.44	15.82	4.63	15
	ENERCS502	50	2.38	22.85	4.81	24
	ENERCS1002	100	2.25	44.18	5.56	50

* ENERSM-50 is fitted with an AR400 coupler

Air Hydraulic Pumps

ENEPARG1102N

ENEXA12G

Turbo II Air Pumps

- "Turbo" feature utilizes exhaust air to help power the pump
- Air exhaust muffler quieter operation and reduced operator fatique
- Advance/Hold/Retract valve function

XA Series Air Pumps

- Finely metered flow for greated control
- Ergonomic design for less operator fatigue
- Pedal lock for retract or load holding
- ATEX Certified and included ground screw for explosion protection

Stock No.	Usable Oil Capacity (cu.in.)	Pressure Rating, PSI	Air Pressure Range, PSI	Air Consump, SCFM	Sound dBA	Weight (lbs)
ENEPATG1102N*	127	10,000	40-125	12	76	18
ENEPATG1105N	230	10,000	40-125	12	76	22
ENEPARG1102N	127	10,000	40-125	8-12	76	22
ENEXA12	122	10,000	40-125	10-35	72	22
ENEXA12G**	122	10,000	40-125	10-35	72	23

* Includes a 15-foot pendant for remote operation
**Includes an integrated pressure guage protected by the pump housing
Recommended Regulator-Filter Lubricator: ENERFL 102 for all air hydraulic pump models

Hand Pumps

Steel Hand Pumps

- Designed for maintenance, construction, lifting, and testing applications
- Two-Speed models reduce handle strokes by as much as 78% over ingle speed pumps
- Internal pressure relief valves for overload protection

Ultra High-Pressure Hand Pump

- Operational up to 40,000 psi., all other hand pumps have a 10,000 psi limit

Composite Hand Pumps

- Light weight and compact design, with lower handle effort
- Non-conductive fiberglass handle for operator safety
- Pump reservoir made of durable composite material for corrosion resistance

Stock No.	Description	Usable Oil Capacity (cu.in.)	Pressure Rating, PSI		Oil Displacement per Stroke, cu. in.		Maximum Handle Effort, (lbs)
			1st Stage	2nd stage	1st Stage	2nd stage	
ENEP39	Steel Hand Pump, Single Speed	40	N/A	10,000	N/A	0.16	85
ENEP80	Steel Hand Pump, Two-Speed	134	350	10,000	0.99	0.15	77
ENEP462	Steel Hand Pump, Two-Speed	453	200	10,000	7.69	0.29	110
ENEP2282	Ultra High-Pressure, Single Speed	60	200	40,000	0.99	0.037	106
ENEP391	Composite Hand Pump, Single Speed	55	N/A	10,000	N/A	0.151	85
ENEP142	Composite Hand Pump, Two-Speed	20	200	10,000	0.221	0.055	78
ENEP802	Composite Hand Pump, Two-Speed	155	400	10,000	2.4	0.151	95
ENEP392	Composite Hand Pump, Two-Speed	55	200	10,000	0.687	0.151	93

Electric Hydraulic Pumps

ENEXC1202MB

ENEXPUD1101B

XC Cordless

- Portability of a hand pump with the speed of an electric pump
- Integrated handle and shoulder strap for maximum portability
- Bladder oil reservoir allows for pump operation in any position
- Pump models include two heavy duty, 28 V Lithium-ion, 3.0 amp-hour battery packs and quick charger

PU Series

- FFully electric operation for maximum speed
- Pendant control of both motor and valve operation
- ENEPUD1101B offers advance/auto-retract operation through pendant
- ENEPUD1301B offers advance/hold/retract through pendant

Stock No.	Usable Oil Capacity (cu.in.)	Output Flow Rate (cu. in./ minute		Voltage (VAC)	Weight (lbs)
		200 psi	10,000 psi		
ENEXC1201MB	61	125	15	115	20
ENEXC1202MB	120	125	15	115	22
ENEPUD1101B	231	200	20	115	35
ENEPUD1301B	231	200	20	115	35

⚠ WARNING

• Read safety precautions on pages W1 to W2

HYDRAULIC MAINTENANCE TOOLS

ENERPAC Hydraulic Technology Worldwide

Hydraulic Maintenance Sets

- All sets include Enerpac pump, hose, cylinder, and gauge
- Lock-on or threaded connectors
- Complete set for almost every maintenance application

ENEMS210

The Universal Hydraulic Tool Box

Stock No.	Capacity, Using Attachments, (Tons)	Capacity, Without Attachments, (Tons)	Number of Components	Weight, (lbs)
ENEMS24	2.5	5.0	34	59
ENEMSFP5	2.5	5.0	24	44
ENEMS210	5.0	10.0	35	140
ENEMSFP10	5.0	10.0	22	105
ENEMS220	12.5	25.0	13	210
ENEMS21020	5.0 - 12.5	10.0 - 25.0	53	350

Hydraulic Maintenance Set Components

Stock No.	Hand Pump	Hose	Cylinder	Gauge	Gauge Adaptor
ENEMS24	ENEP142	ENEHC7206	ENERC55	ENEGP10S	ENEGA4
ENEMSFP5	ENEP142	ENEHC7206	ENERC55	ENEG2535L	ENEGA3
ENEMS210	ENEP392	ENEHC7206	ENERC106	ENEGP10S	ENEGA2
ENEMSFP10	ENEP392	ENEHC7206	ENERC106	ENEG2535L	ENEGA3
ENEMS220	ENEP392	ENEHC7206	ENERC256	ENEGP10S	ENEGA2
ENEMS21020	ENEP392	ENEHC7206	ENERC102, ENERC106, ENERC256	ENEGP10S	ENEGA2

Vertical Lifting Wedge

- Enerpac vertical lifting wedge requires a .39 inch access gap
- Lifting force 16 ton at 10,000 psi hydraulic pressure
- Automatic mechanical retraction (single acting)
- Securely raises or lowers 16 tons with no slippage
- Lifting wedge ENELW16 includes safety block ENESB2
- Use in tandem to lift 32 tons, or 64 tons
- .83 inch of vertical lift from each step (maximum lift to 2.72 inches with optional ENELWB1 stepped block)

ENELW-16

Stock No.	Maximum Lifting Force (Tons)	Tip Clearance (in)	Max. Spread (in)*	Oil Capacity (Inches3) Attachments, (Tons)	Maximum Operating Pressure (psi) Attachments, (Tons)	Lifting Stroke (in) Attachments, Tons	Weight, (lbs)
ENELW-16	16	.39	2.72	4.75 in^3	10,000	0.83	15.40

For using two or four lifting wedges simultaneously use split-flow manifolds ENEAM21 or ENEAM41

* Maximum spread 2.72 inches when using optional stepped block ENELWB1

Hydraulic H-Frame Press Sets

- Available in 10, 25, 50, 100, 150, and 200-ton capacities
- Press set includes H-frame press, cylinder, pump, load gauge, gauge adaptor, and 6-foot hose
- Designed for general maintenance, intermittent use
- Heavy-duty welded frame minimizes flex under load, lasting longer than bolted or pinned-style frames
- Exclusive "Hydra-Lift" system uses an 18" stroke, press-mounted hydraulic jack to adjust press bed height. (25-, 50-, 100-ton models only)
- Includes pump mounting bracket to support the pump
- Roller head design allows movement and locking of the cylinder from side-to-side for off-center pressing jobs (50- and 100-ton models only; 10- & 25-ton models are able to move side-to-side but do not have rollers)
- Adjustable work bed is supported by pin supports which are 10" apart
- V-blocks sold separately (come in pairs)

ENEIPE5060

Optional V-Blocks

Press Stock No.	Optional V-Blocks Stock No.	Power Source Type			Press Capacity, (Tons)	Maximum Bed Daylight, (in)	Maximum Bed Width, (in)	Cylinder Stroke Length, (in)	Cylinder Stroke Length (in)	Weight, (lbs)
		Hand	Electric	Air						
ENEIPA1220	**ENEA136**			X	10	40.00	18.63	10	1-Speed	160
ENEIPE2505	**ENEA130**		X		25	54.50	29.00	6	1-Speed	605
ENEIPA2520	**ENEA130**			X	25	54.50	29.00	14	1-Speed	610
ENEIPE3060	**ENEA136**		X		30	54.50	29.00	14	1-Speed	722
ENEIPE5060	**ENEA150**		X		50	48.56	28.75	13	2-Speed	1,051
ENEIPE10060	**ENEA200**		X		100	42.50	35.00	13	2-Speed	1,743

Roll Frame Presses

- Capacity of 50 to 200 tons
- Quality welded frame for maximum strength and long life
- Frame rolls easily on four steel roller bearings
- Hydraulic clamp cylinders lock frame into position
- Exclusive “Hydra-Lift™” bolster for effortless adjustment of the vertical daylight
- Standard roller head design allows movement of the cylinder from side to side
- All roll frame press models in the chart below have been matched to a pump, cylinder, hoses, and gauge, offering a complete package
- Roll Frame design features a stationary bed with the ability to support heavy loads

ENEIPR10075

Stock No.	Capacity (Tons)	Vertical Daylight (in)		Pump (Electric) Stock No.	Max. Bed Width (in)	Cylinder (Double-Acting) Stock No.	Stroke (in)	Speed (Seconds / Inch)		Weight, (lbs)
		Min	Max					Rapid Advance	Pressing	
ENEIPR5075	50	6	37.12	**ENEZE4420SBN**	28.75	**ENERR5013**	13.13	1.0	11.1	1,961
ENEIPR10075	100	6.28	41.28	**ENEZE5420SGN**	35.00	**ENERR10013**	13.13	1.5	10.3	3,849
ENEPR-20075	200	11	51	**ENEZE5420SGN**	48.00	**ENERR20013**	13.00	3.1	22.1	7,869

⚠ WARNING

• Read safety precautions on pages W1 to W2

HYDRAULIC SPECIALTY TOOLS

ENERPAC
Hydraulic Technology Worldwide

ENEFSM8
w/safety blocks

ENEFSH14
w/safety blocks

Hydraulic & Mechanical Industrial Spreaders

- For maintenance, commissioning, shutdowns, testing and valve change outs
- For disassembling and assembling flange joints safely & efficiently
- Safety blocks included with ENEFSH14 and ENEFSM8
- ENEFSB1 safety blocks sold separately in pairs

Stock No.	Maximum Spreading Force (Tons)	Tip Clearance in (mm)	Maximum Spread* in (mm)	Type	Weight (lbs)
ENEFSH14	14	.24 (6)	3.16 (81)	Hydraulic	15.7
ENEFSM8	8	.24 (6)	3.16 (81)	Mechanical	14.3

* Using stepped blocks ENEFSB1

ENEFS56

Hydraulic Flange Spreaders

- Adjustable jaw widths from 2.75" to 8.5" for a wide range of application
- Lightweight, ergonomic design for ease of use
- Single-acting, spring return Enerpac RC cylinders for fast trouble-free operation

Stock No.	Maximum Flange Thickness (in)	Stud Size (in)	Standard Wedge (in)	Capacity (tons)	Stroke (in)	Oil Capacity (in3)	Weight (lbs)
ENEFS56	2 x 2.25	.75 - 1.13	.13 - 1.13	5	1.5	1.5	2.0
ENEFS109	2 x 3.63	1.25 - 1.63	.13 - 1.13	10	2.13	4.8	9.1

ENEWR5

ENEWR15

Hydraulic Spreader Cylinders

- ENEWR5 for use in very confined work areas
- ENEWR15 for long stroke spreading applications

Stock No.	Cylinder Capacity (Tons)	Tip Clearance (in)	Length (in)	Oil Capacity (in3)	Maximum Spread	Weight (lbs)
ENEWR5	1.00	.50	8.78	.61	3.70	5.0
ENEWR15	.75	1.26	21.65	3.91	11.50	25.0

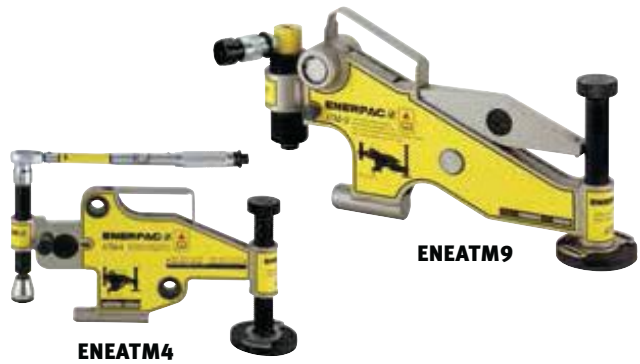

ENEATM9

ENEATM4

Hydraulic & Mechanical Flange Alignment Tools

- ATM-Series tools rectify twists and rotational misalignment quickly, safely, and without the need for an external power source
- Appropriate for use on most ANSI, API, BS and DIN flanges
- No slings, hooks or lifting gear required
- Can be installed and used in any position (horizontally or vertically)
- Portable, light weight design enables easy transport and use, even in remote locations

Stock No.	Maximum Force (ton)		Minimum Bolt Size		Flange Wall Thickness (max)		Weight	
	(ton)	(kN)	(in)	(mm)	(in)	(mm)	(lbs)	(kg)
ENEATM2	1	10	0.63	16	.55 - 3.29	14 - 82	3.5	1.6
ENEATM4	4	40	0.95	24	1.18 - 5.23	30 - 133	19	8.6
ENEATM9*	10	90	1.24	31.5	3.66 - 9.00	93 - 228	32	14.5

* At 10,000 PSI maximum operating pressure
** ENEATM9 includes hand pump and hydraulic hose (gauge sold separately, weight includes tool only

Hydraulic Nut Splitters

- Heavy-duty chisels can be reground
- Applications include servicing trucks, piping industry, tank cleaning, railroad, petrochemical, steel construction, mining, etc.
- Does not damage stud of bolt. (Not for use on square nuts)
- Nut splitters include a spare chisel, a spare set screw, and the wrench used to secure the chisel
- Maximum allowable hardness of nuts to split is HRC44

ENENC2432

Stock No.	Bolt Range (in)	Hexagon Nut Range (in)	Capacity (ton)	Oil Capacity (in3)	Weight (lbs)	Replacement Blades Stock No.
ENENC1319	.31-.50	.50-.75	5	.92	1.8	ENENCB1319
ENENC1924	.50-.63	.75-.94	10	1.22	4.4	ENENCB1924
ENENC2432	.63-.88	.94-1.13	15	3.66	6.6	ENENCB2432
ENENC3241	.88-1.13	1.13-1.56	20	4.88	9.7	ENENCB3241
ENENC4150	1.13-1.38	1.56-2.00	35	9.46	18	ENENCB4150
ENENC5060	1.38-1.50	2.00-2.25	50	14.64	26	ENENCB5060
ENENC6075	1.50-1.88	2.38-2.88	90	30.00	75.1	ENENCB6075

Easily removing rusty nuts during railroad construction is just one of many application examples for the Enerpac Nut Splitter.

Hydraulic Cutterheads

- Single acting, spring return on all models, except WHR-1250
- Guillotine action for efficient operation
- Lifting handles on larger models
- Carrying bag included for easy carrying and tool protection
- Ideal for use with most Enerpac pumps featuring 3-way valve or dump valve and 10,000 psi pressure rating (except WHR-1250, which requires 4-way valve)
- CR-400 coupler and dust cap included on all models
- Selection chart provides cutting capacity for each tool

Type	Stock No.	Capacity (ton)	Oil Capa- city (in3)	Length (in)	Steel Wire Rope, Hempcore or IWRC 6x7, 6x12 or 6x19	Round Bar				Wire Strand				Cable		Wt. (lbs)	Replacement Blades Stock No.
						Copper Wire or Bar	Alum.Wire or Bar	Soft Steel Bolts	Rein-forcing Bar	Bare Copper Wire Strands	Bare Alum. Wire Strands 6x7	ACSR Wire Strands	Guy Steel Wire Strands 1x7 1x19	Tele- phone Cable CPP	Under ground Cable (Power)		
Single-Acting Hydraulic Cutterheads with Spring Return	ENEWHC750	4	1.20	5.00	0.63	0.75	0.75	0.75	.50***	0.75	.75	0.75	0.63	##	##	7	ENEWCB750
	ENEWHC1250	20	8.20	11.00	1.25	1.13	1.25	1.13	1.00	1.25	1.25	1.25	0.88	##	##	25	ENEWCB1250
	ENEWHC2000	13	7.30	15.00	1.00	1.25	1.25	0.88	##	2.00	2.00	2.00	0.75	##	2.00	23	ENEWCB2000
	ENEWHC3380	3	4.00	19.00	##	##	##	##	##	1.63	1.69	##	##	3.38	3.38	20	ENEWCB3380
	ENEWHC4000	8	8.40	24.00	##	##	##	##	##	##	##	##	##	4.00	4.00	32	ENEWCB4000
Double-Acting Hydraulic Cutterhead	ENEWHR1250	20	7.50	16.50	1.25	1.25	1.25	1.13	1.00	1.25	1.25	1.25	0.88	##	##	26	ENEWCB1250

Will not cut designated material *** Low alloy material

Hydraulic Cutterhead Sets

- Everything needed to start the job immediately
- Sets include cutterhead, pump, and hose
- Foot pump frees hands for versatility

Stock No.	Pump Type	Cutter Stock No.	Pump Stock No.
ENESTC750H	Hand Pump	ENEWHC750	ENEP392
ENESTC750A	Air Operated Pump	ENEWHC750	ENEPATG1102N
ENESTC1250H	Hand Pump	ENEWHC1250	ENEP392
ENESTC1250A	Air Operated Pump	ENEWHC1250	ENEPATG1102N
ENESTC750FP	Foot Pump	ENEWHC750	ENEP392FP
ENESTC1250FP	Foot Pump	ENEWHC1250	ENEP392FP

ENEWHC1250

ENEWHC750

⚠ WARNING

• Read safety precautions on pages W1 to W2

HYDRAULIC CUTTERS AND OIL

ENERPAC Hydraulic Technology Worldwide

Self-Contained Hydraulic Cutters

- Self-contained cutters contain built-in hydraulic pumps to acheive maximum convenience and portability
- Rotating heads for operator convenience
- Guillotine action (except WMC-1000) for efficient operation
- Carrying bag included for easy carrying and tool protection
- Velcro straps to secure handles on larger models for easy transportation
- Spring return on all models
- Lightweight, self-contained tool, can be used anywhere
- Selection chart provides cutting capacity for each tool

Stock No.	Capacity (ton)	Length (in)	Steel Wire Rope, Hempcore or IWRC 6x7, 6x12 or 6x19	Round Bar				Wire Strand					Cable		Weight (lbs)	Replacement Blades Stock No.
				Copper Wire or Bar	Alum.Wire or Bar	Soft Steel Bolts	Reinforcing Bar	Bare Copper Wire Strands	Bare Alum. Wire Strands 6x7	ACSR Wire Strands	Guy Steel Wire Strands 1x7	Guy Steel Wire Strands 1x19	Telephone Cable CPP	Underground Cable (Power)		
ENEWMC580	4	15.00	.63	.63	.63	.63	.38	.63	.63	.63	.56	.56	##	.63	8	**ENEWCB750**
ENEWMC750	4	15.00	.63	.69	.69	.69	.50***	.75	.75	.75	.56	.56	##	.68	8	**ENEWCB750**
ENEWMC1000*	20	26.75	##	.75	.75	.75	.75	##	##	##	##	##	##	##	25	**ENEWCB1000**
ENEWMC1250	20	26.75	1.25	1.13	1.25	1.25	.88	1.25	1.25	1.25	.88	1.00	##	##	23	**ENEWCB1250**
ENEWMC1580	6	22.00	.75	.75	.75	.75	##	1.50	1.63	1.63	.63	.63	33	1.63	15	**ENEWCB1580**
ENEWMC2000	13	24.75	1.00	1.25	1.25	.88	##	2.00	2.00	2.00	.75	.75	##	2.00	24	**ENEWCB2000**
ENEWMC3380	3	26.00	##	##	##	##	##	1.83	1.69	##	##	##	3.37	3.38	22	**ENEWCB3380**

* ENEWMC1000 cuts .50" alloy chain grade 70 (type G7 transport or tie-down or grade 80 (for overhead lifting applications
Will not cut designated material *** Low alloy material

Enerpac System Components

HF OIL

- Specially formulated for power pumps
  - maximum volumetric efficiency
  - maximum heat transfer
  - prevents cavitation
  - anti-sludge, anti-rust, anti-foam additives
- Maximum film protective lubricity
  - anti-oxidation additives

LX Hand Pump Oil

- Specially formulated for power pumps
  - anti-sludge, anti-rust additives
- Reduced handle effort over HF oil
  - good low temperature performance
- Not for use in power pumps

HF-100

LX-101

Stock No.	Contents	Stud Size (in)
HF-100	1 Quart	High viscosity index ensures maximum lubricity over a wide range of opertion temperatures
HF-101	1 Gallon*	
HF-102	5 Gallons	
HF-104	55 Gallons	
LX-101	1 Gallon**	

* Packed in two 2½gallon cans
* Hand pump oil.

	LX Oil	HF Oil
ISO Grade	15	32
Viscosity Index	105 min	100 min
Viscosity at 210˚F	38 S.U.S	44 S.U.S
Viscosity at 100˚F	82 S.U.S	164 S.U.S
Viscosity at 0˚F	<1635 S.U.S	<7236 S.U.S
API Gravity	34.2	31.0/33.0
Flash, C.O.C. ˚F	375	400
Pour Point, ˚F	-45	-45
Paraffinic Base Color	Yellow	Blue

NOTE: SAE grades do not apply to hydraulic oil.

Overview.....N152
Industrial Finish Hand Tools N154
Railroad Specialty Tools N155
Utility Specialty Tools..... N159
Power Generation Industry Capabilities N160
Heavy-Duty Hand Tools & Storage..... N162
BASH™ Hammers N179
Insulated, Ergo & Material Removal Tools... N181
Measurement N194

INDUSTRIAL SPECIALTY TOOLS

BECAUSE YOU SPECIALIZE, SO DO WE.

At Snap-on, we offer the full assortment of standard tools – however, not all jobs are standard. Industrial tool users need something specifically designed for them, which is why Snap-on carries thousands of tools and products geared towards industrial specialty use. From comprehensive mobile tool solutions and custom tool kits, to utility and railroad tools and more, we have the exact tools for exact jobs. Because when it comes to industrial specialty tools, that's a Snap-on specialty.

WHAT MAKES SNAP-ON SPECIALTY TOOLS SPECIAL:

BREADTH OF LINE
At Snap-on, we've been making tools for over 95 years – so it should come as no surprise that we have the broadest range of tools anywhere on the planet. And every one is manufactured to the highest standards.

SERVING CRITICAL INDUSTRIES
Whether it's insulated hand tools for power generation, mud pump wrenches for oil and gas, or track tools for railroad, we connect with our customers in these segments and offer solutions that address their unique requirements and environments.

ENGINEERING & MANUFACTURING AUTHORITY
Simply put, Snap-on helps customers solve problems. Our engineering and manufacturing capabilities are unrivaled: we know how to devise and deliver the solutions that increase productivity.

ERGONOMICS
A comfortable tool is a productive tool. At Snap-on, we're committed to the development of tools with ergonomic features – for maximum control and comfort.

CUSTOM TOOLS: ANOTHER SNAP-ON SPECIALTY.

CUSTOM TOOLS
Don't see what you're looking for in this catalog? There's no need to worry. Snap-on makes thousands of custom tools every year – and we can make the ones you need. Let us help bring your product idea to life. Contact your Account Manager to learn more.

SOCKETS & ACCESSORIES



1/4" Flank Drive Flare Nut-Deep, inches, 12-Point

• Use only moderate force on crowfoot and flare nut wrench

	12	A (in)	C (in)	E (in)	Maximum Recommended Working Torque, in. lb.
3/8	GAN85086B	9/32	1/2	1/2	75
7/16	GAN85087B	11/32	9/16	9/16	200
1/2	GAN85088B	13/32	19/32	9/16	200
9/16	GAN85089B	15/32	5/8	9/16	200

3/8" Flank Drive Flare Nut-Deep, inches, 12-Point

	12	A (in)	B (in)	C (in)	E (in)	Maximum Recommended Working Torque, in. lb.
5/8	GAN850810B	1 5/16	1/2	23/32	23/32	250
11/16	GAN850811B	1 1/32	17/32	25/32	23/32	310
3/4	GAN850812B	1 1/8	9/16	13/16	3/4	450
13/16	GAN850813B	1 7/32	5/8	7/8	3/4	450
7/8	GAN850814B	1 5/16	25/32	15/16	25/32	625
15/16	GAN850815B	1 3/8	3/4	31/32	25/32	625
1	GAN850816B	1 7/16	3/4	1	13/16	625
1 1/16	GAN850817B	1 17/32	25/32	1 1/32	13/16	625

ASME/ANSI B107.100

GSSDE63CNP

Electronic Thin Blade Screwdriver

• Recessed ends for fingertip pressure

Stock No.	A (in)	C (in)	E (in)	D (in)
GSSDE42CNP	.018 x 1/8	1/8	2	5 5/16
GSSDE44CNP	.018 x 1/8	1/8	4	7 5/16
GSSDE46CNP	.018 x 1/8	1/8	5	9 5/16
GSSDE63CNP	.030 x 3/16	3/16	3	9 5/16
GSSDE64CNP	.028 x 3/16	3/16	4	7 5/16
GSSDE66CNP	.030 x 3/16	3/16	6	6 5/16
GSSDE68CNP	.028 x 3/16	3/16	8	11 5/16

Impact Rated Hex Drivers

IMFA16

- Designed for use with pneumatic and cordless impact wrenches
- Optional Ret-Ring ensures positive attachment to anvil

Stock No.	Drive Size	Hex Size	OAL	Replacement Bit	Optional Ret-Ring
IMFAM12	3/8"	12mm	72.7mm	IMFAM12-2	RR37575
IMFAM14	3/8"	14mm	72.7mm	IMFAM14-2	RR37575
IMFA16	3/8"	1/2"	2-7/8"	IMFA16-2	RR37575
IMFA18	3/8"	9/16"	2-7/8"	IMFA18-2	RR37575
IMSA20	1/2"	5/8"	3-1/2"	IMSA20-2	RR50130
IMSA22	1/2"	11/16"	3-1/2"	IMSA22-2	RR50130
IMSA24	1/2"	3/4"	3-1/2"	IMSA24-2	RR50130
IMSA28	1/2"	7/8"	3-1/2"	IMSA28-2	RR50130

1/2" Flank Drive® Flare Nut-Deep, inches, 12-Point

	12	A (in)	B (in)	C (in)	E (in)	Maximum Recommended Working Torque, in. lb.
1 1/8	GAN850818B	1 5/8	27/32	1 5/32	7/8	825
1 3/16	GAN850819B	1 11/16	29/32	1 3/16	7/8	825
1 1/4	GAN850820B	1 25/32	15/16	1 7/32	7/8	825
1 5/16	GAN850821B	1 27/32	31/32	1 1/4	7/8	900
1 3/8	GAN850822B	1 15/16	1 1/16	1 5/16	15/16	900
1 7/16	GAN850823B	2	1 1/16	1 11/32	15/16	900
1 1/2	GAN850824B	2 3/32	1 1/8	1 3/8	15/16	900
1 9/16	GAN850825B	2 5/32	1 5/32	1 13/32	15/16	900
1 5/8	GAN850826B	2 7/32	1 7/32	1 7/16	15/16	1,100
1 11/16	GAN850827B	2 5/16	1 5/16	1 1/2	1 1/32	1,100
1 3/4	GAN850828B	2 3/8	1 5/16	1 9/16	1 1/32	1,150
1 13/16	GAN850829B	2 15/32	1 11/32	1 19/32	1 1/32	1,200
1 7/8	GAN850830B	2 9/16	1 3/8	1 21/32	1 1/16	1,200
1 15/16	GAN850831B	2 5/8	1 7/16	1 11/16	1 1/16	1,200
2	GAN850832B	2 23/32	1 9/16	1 23/32	1 1/16	1,400
2 1/4	GAN850836B	3 1/32	1 11/16	1 7/8	1 1/8	1,500
2 9/16	GAN850841B	3 7/16	1 29/32	2 3/32	1 9/32	1,750

QCDTC3250

QCDTC3250 Electronic Torque Comparator

- Fast, highly accurate method to check the accuracy of mechanical and electronic 3/8" and 1/2" drive torque wrenches
- Large easy-to-read LCD Display with backlight
- Three measurement units [ft-lb, in-lb, N•m]
- Highly accurate; +/- 1% CW & +/- 1% CCW, 10%–100% of full scale
- Tough composite housing with integrated adaptor storage
- Three primary torque check functions: including Track, Peak Hold, First Peak
- Adjustable auto shutoff feature
- Integrated exercise adaptor on mounting plate (allows user to break-in for accurate results per 107-300 standard)
- Use (three) "AA" alkaline batteries (Optional AC adaptor DTS8269)
- Includes 3/8" adaptor (GAF2A)
- CE Approved
- See Page 300 for the complete selection of Snap-on Torque Comparators

Track Tools

5703747UPA

IM728NT

N8750A2NP

IM736NT

N8705ANP

N8842

N8834

N8835

IM748BC1.5

N8741

1" Drive Lag Screw Sockets

N8705ANP Crossing Lag Socket.
- The socket has a T70 TORX® bit for easy installation and removal of "star" crossing screws.

N8705A2NP Replacement Bit for N8705ANP
- This bit can be used with the N8705ANP.

5703747UPA Rectangular Head Lag Socket.
- For use on special rectangular head lag screws. The opening is 1⅛" X ⅞" size and can be used on an impact wrench.

1" Drive Lag Screw Sockets

IM728NT Single Square Tapered Nose Socket.
- 1" drive, ⅞" square fastener size

IM736NT Single Square Tapered Nose Socket.
- 1" drive, 1⅛" square

1" Drive Deep Tapered Nose Track Bolt Impact Sockets

SIM746NT 1 7/16" Double Square
N8842 1 ⅝" Double Square
N8834 1 1/16" Double Square
N8835 1 13/16 Double Square

1" Drive Shallow Impact Socket, 4 Point, SAE

IM748BC1.5 1" Drive Shallow Impact Socket, 4 Point, SAE
- 1" SQ Drive to 1-1/2" - Single Square Deep Impact
- Socket for use with impact tools

1" Drive Deep Frog Bolt Impact Sockets

N8741 2 3/16" Deep Double Square Frog Bolt Socket
- 1" drive socket is used primarily for Frog bolt applications.
- It is an 8-point socket.

5703747UPA Rectangular Head Lag Socket
- For use on special rectangular head lag screws
- Rectangular head timber screw spikes are used to secure the rail anchor or rail clip
- The screw spikes are used by all railroads to varying degrees, but mainly the North American freight railroads (BNSF, NS, CSX, UPRR, KCS, CP Rail and CN Rail)
- The opening is 1⅛" × ⅞" with a 1" square drive and can be used on an impact wrench

5703747UPA

SIM740

SIM740 Deep 8-Point Impact Socket
- Bolts securing track joint bars
- Track switch bolts
- ½" drive, size 2-3/16"

⚠ WARNING

RAILROAD SPECIALTY TOOLS

Locomotive Tools

B4203A-30FHD

Exhaust Stack Tools

B4203A-30FHD Torque Adaptor

- ½" drive, 12-point 15/16" box-end
- Offset provides access to exhaust stacks
- Centerline distance is 2". 5 ½" long

N6387AWCW

DS560A

Miscellaneous Diesel Tools

N6387AWCW Test Cock Cylinder Socket

- This ½" drive socket is used to loosen or tighten the test cocks on EMD locomotives.

DS560A Deep Diode Socket.

- Thin wall ½" drive 1 ¼" 6-point slotted socket. For use on high horsepower EMD locomotives.

GVO2628TH.20



Open End Wrench

GVO2628TH.20

- Used on railroad auxiliary generator coupler nuts (EMD Locomotives)

Size	Stock No.	A	B	C	D	E
1 1/8" x 7/8"	5703747UPA	1 7/8"	2 1/8"	1 3/4"	3 1/2"	7/8"
13/16"–7/8"	GVO2628TH.20	—	1 11/16"–1 13/16"	—	7/32"	10"

K2921A

N6369L-JHW

Water Pump Wrenches

N6369L-JHW Left hand water pump wrench

- ¾" and ⅞" 12-point box. The left-hand offset bend allows easy access.

N6369R-JHW Right Hand water pump wrench

- ¾" and ⅞" 12-point box. The right-hand offset bend allows easy access. (not shown)

K2921A Ratcheting water pump wrench

- This half moon ratcheting wrench is ¾" by 5/8" 12-point

GTW881

2-¾" Crab Nut Socket

GTW881

- Industrial finish crab nut socket for EMD locomotives.

Size	Stock No.	A	B	C	D	E
2-¾"	GTW881	4 1/8"	1 ¾"	1 7/8"	3"	1 ¾"

IMSLE242A

Inverted Torx® Impact Socket

IMSLE242A

- ¾" drive, size E24 socket
- Fit head bolts on MaxxForce® 11 and 13 engines and a variety of other heavy-duty applications

GF361NP

Piston Rod Socket

GF361NP

- For fast removal of piston rud nuts with an air ratchet after nuts have been broken loose
- ⅜" drive, 1-⅛" 12 point
- OAL 1-¼"

IMMD202B

3/4" Drive 12 Point Shallow Socket

IMMD202B

- Used for tightening turbo bolts on GE EVO Tier-II locomotives

Note: Products shown are available via special order
You can also submit a QuickQuote on-line at:
www.snaponspecialproducts.com

Locomotive Tools

Oil Pan Bolt Socket
IMSF482A
- Used for oil pan bolts on EMD locomotives
- Thin wall 6 point socket
- Socket size 1-½"
- ¾" drive, OAL 2-¼"

IMFS482A

N8932

Alignment Bar
N8932
- Used for radiator and other common alignment work where access is limited
- Made of 9/16" round stock, OAL 16"

Car Shop Tools

CK200

K2952

Cotter Key Tools
CK200 Cotter Key Pliers
- Tapered jaws on these pliers reach in to remove the self spreader in most cotter keys. The prybar end can be used to pry cotter keys, gaskets, etc.

K2952 Dual purpose Pliers
- One end is a heavy duty combination pliers, while the other end can be used to bend cotter keys.

RS64

Ratcheting Open End Wrenches
Jaw design allows ratcheting action, ideal in situations where a socket can't be used.

RS24NP 3/4" wrench size
- 9¼" long. For dirt collectors or empty load sensor valves

RS64 2" wrench size
- 9¼" long. Used to adjust WABCO brake beams.

N6606

Air Brake Tool
N6606 Special Air Brake Tool
- Removes and replaces the air brake strainer nut, vent protector and vent protector shipping plugs that are 13/16" and 1¾" across the flats
- 11½" long

2842BSB

Brake Shoe Prybar
2842BSB
- Ideal for removal and installation of brake shoes
- Rugged prybar, 41" long 7/8" stock size, with a 1" prying edge

SIMDTSA402

Railroad Torque Socket
SIMDTSA402
- Allows operator to use angle torque to obtain proper torque on AH gearcase bolts when applying to new gearcases or replacing broken gearcase bolts
- ¾" drive 1-¼" 12-point impact socket, OAL 5-7/16"

N8837A

Air Brake Socket
N8837A
- Hollow shank extra deep socket for servicing air brakes where bolts protrude
- ½" drive, 15/16" socket size

⚠ WARNING

Note: Products shown are available via special order
You can also submit a QuickQuote on-line at:
www.snaponspecialproducts.com

SNAP-ON SPECIALTY TOOLS

Car Shop Tools

M4431B Car Yard Inspector Wrench
- Tightens air brake external nuts and cover screws
- Incorporates four 12-point sockets (¾", ⅞", 15/16" and 1") plus a 9/16" open wrench all-in-one tool
- Box end portion of wrench is 10 3/8" long
- Open end portion of wrench is 6 1/4" long

N8913 Side-Bearing Cage Socket
- Use this ¾" drive E20 TORX® socket to service the breakoff portion of the side bearing cage bolt
- Installation of shear type E20 bolt during alignment of suspensions on Hendrickson trailers

Size	Stock No.	A	B	C	D	E
E20	**N8913**	1 5/32"	1 5/8"	¾"	1 ¾"	½"

N8837A 15/16" Hollow Shank Socket
- These extra deep, 6-point ½" square drive sockets are required for AB and ABD air brake valves where bolts protude. Hollow Shanks for bolt clearance.

M4431B

N8913

N8837A

Signal Tools

N6161N8MD2.1 Point Detector Bushing Socket
- ½" square drive internal
- 4 lug socket designed for installing or removing the point detector bushing found on WABCO switch machines.
- The internal lugs provide greater strength.

Switch Machine Wrenches.
- Each wrench features a 45 degree offset and two different wrench sizes.
- The 25" length gives added leverage.

GVS5264-45 1-5/8" and 2" offset open end wrenches.
GVS3440-45 1-1/16" and 1-1/4" wrench sizes

GVS5264-45

N6161N8MD2.1

Bridge and Building Tools

Hook Bolt Sockets
- These 6" long sockets are used on hook bolt applications, where extra bolt clearance is needed.
- All in 1" drive.

IM736S6TL Single Square
- Socket size 1 1/8".

IM740S6TL Single Square
- Socket size 1 1/4".

N8930 Six Point
- Socket size 1 1/8".

IMASQ162NP Impact Adapter
- This ½" external by ¾" internal impact adapter has lock button retention, and a replaceable ½" external drive.

IMASQ162-2B Replacement 1/2" drive
- Must order roll pin ESD311K separately.

IMASQ162-2B

IM740S6TL

Note: Products shown are available via special order
You can also submit a QuickQuote on-line at:
www.snaponspecialproducts.com

Oil and Gas and Power Generation Industry Specialty Tools

IM748BC1.5 1" Sq. Dr. to 1 ½", 4-point, SAE

IM748BC1.5

- These "end effector" sockets are used in the manufacturing of subsea and surface wellhead equipment for the oil and gas industry
- Others in the series include the IM753.1BC1.5, IM732BC1.5 and IM632BC1.5

Size	Stock No.	Square Drive, (in)	A (in)	B (in)	C (in)	D (in)	E (in)
1"	IM632BC1.5	¾	2 ⅛	1 ¾	—	2 ¼	¾
1"	IM748BC1.5	1	2 ⅞	2 ⅜	1 ⅝	3 ½	⅞
1.66"	IM753.1BC1.5	1	1 15/16	2 ⅜	—	3 ½	1 1/16
1	IM732BC1.5	1	2 ⅛	2 ⅛	—	2 ¾	¾

RYA1824

9/16" x ¾" Offset Ratcheting Box Wrench

RYA1824

- Used by utility workers on overhead transformers
- Commonly known as a bug wrench

ATSK3715

Manhole Cover Removal Tool

ATSK3715

- This manhole cover removal tool is used by Electrical Utilities to remove manhole covers weighing up to 600 lbs.

B2192

B2192 – ½" Drive Impact Penta-Socket

- For quick access into electric utility transformers

⚠ WARNING

APW10VLV



Valve Persuader Wrench

- "Refinery Wrench" used in oil and gas downstream facilities
- Great universal multi-tool for numerous daily applications including 4" and 6" quick turns to open and close valves

Size	Stock No.	A	B
10"	APW10VLV	10"	1 ½"

GADW10VLV

Adjustable Valve Persuader Wrench

- Two tools combined into one convenient operator's tool that can be used wherever valves are adjusted for flow and pressure
- 10" overall length supplies leverage while being compact enough to be easily carried
- Big-mouth adjustable wrench has large, 1 ¾" capacity
- ¾" valve wheel wrench opening
- Precision hardened and anti-corrosion treated
- Easy-to-read size measurement scale: fractional on one side, metric on the other

Size	Stock No.	A	B
10"	GADW10VLC	10"	1 ¾"

K3477

Utility Transformer Access Tool

K3477

- Combines 5 tools into 1, making it essential for electrical transmission and distribution technicians
- Includes commonly used ¾" six point and 51/64" penta-sockets (5-sided), for access into and maintenance of pad mounted transformers
- Sealed head reversible ratchet keeps dirt and other contaminants out of the head mechanism.
- Utilizes 2" extensions for clearance
- Ergonomic soft-grip handle improves comfort and prevents slippage

TOOLS AND SOLUTIONS FOR POWER GENERATION

At Snap-on Industrial, we make tools that make work safer and more productive for power generation professionals performing critical tasks. Many companies offer tools, but what makes Snap-on different is our commitment to our three guiding principles:

- Safety - every product we produce is engineered and manufactured with safety features that protect the user and the equipment being worked on.
- Productivity - every tool we produce is designed to help you get your job done in less time
- Quality and Performance - from their inception as an idea or suggestion, our tools conform to the most rigorous quality and performance standards in design, manufacturing, and materials.

Whether your job is to produce electricity, deliver it, or maintain the fleets that support these efforts, Snap-on Industrial pledges to help you be safer and more productive.

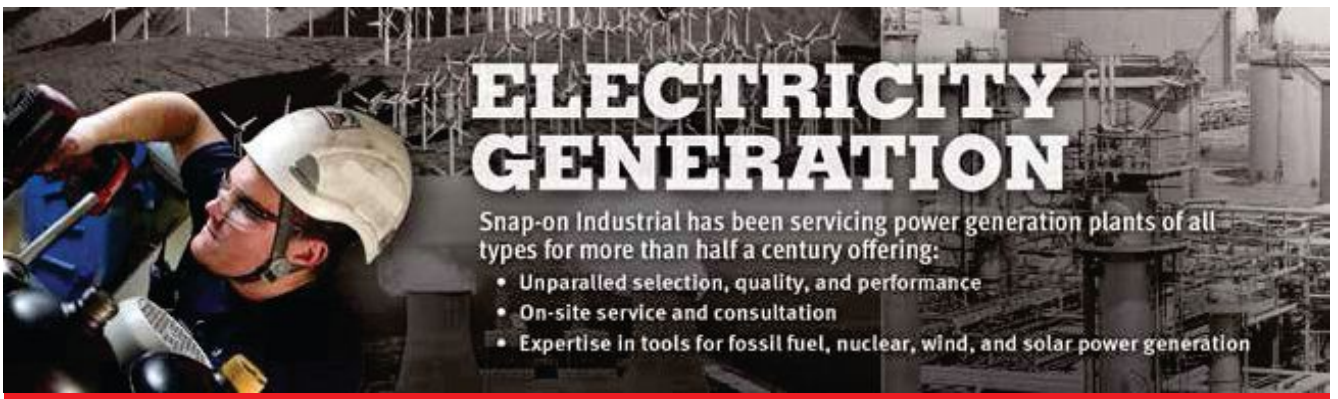

Pneumatic Power Tools

Pgs. N126 - N134, 464 - 486

Striking Wrenches & Retainers

Pgs. N172, 263 - 265

Job Site Tool Storage

Pgs. N162

Cordless Power Tools

Pgs. 444-462

Tool / Asset Management

Pgs. N006 - N050

Pullers

Pgs. 387 - 406

Bolting Tools – Pneumatic & Hydraulic

Pgs. N124 - N126, 301

Tools@Height Drop Prevention

Pgs. N203 - N250

Insulating & Insulated Tools

Pgs. N182 - N183, 347 - 349

Large Sockets

Pgs. 223 - 232

Torque Wrenches, Multipliers, Calibration Equipment

Pgs. N074 - N075 276 - 301

Shop Tool Storage

Pgs. 3 - 98

Cordless Power Tools
Pgs. 444-462

1/2" Drive Impact Sockets
Pgs. 199-207

Tools@Height Drop Prevention
Pgs. N203 - N250

Insulating & Insulated Tools
Pgs. N182 - N183, 347 - 349

Ratcheting Box Wrenches
Pgs. N159, 232-241

Specialty Tools
Pgs. N159

Personal Protective Equipment
Pgs. 728 - 735

Power Tool Accessories
Pgs. N190 - N193, 487-499



Heavy & Light Duty Diagnostics
Pgs. N267 - N274, 744 - 775

Shop Equipment
Pgs. N254 - N266 511 - 740

Vehicle Lifts
Pgs. N254 - N260

Wheel Torque
Pgs. 276 - 286, 580

Tire Pressure and Wheel Tools including Tire Pressure Monitoring
Pgs. 574 - 588

Job Site Boxes

Job Site Boxes

Designed for the toughest outdoor work environments

- Casters weight capacity is 3500 lbs
- Tough industrial powder coating finish
- Heavy 16 gauge steel construction
- Recessed and concealed locking area protects padlock for ultimate security against drills and bolt cutter
- Fully welded seams provide maximum strength
- Recessed side handles for easy transportation
- Reinforced overlapping lid provides protection from weather and forced entry
- Heavy duty industrial lid stays prevents accidental closure
- Tread plate design for rugged durability
- 50954 available in black only, all others are blue

Stock No.	Description
JHW50950	32" Wide x 19" Deep x 17 ½" High
JHW50951	42" Wide x 20" Deep x 23 ½" High
JHW50952	48" Wide x 24" Deep x 27 ½" High
JHW50953	48" Wide x 30" Deep x 33 ½" High
JHW50949	6" x 2" Swivel Caster Set

JHW50950

Job Site Boxes

Designed for the toughest outdoor work environments

- Tough industrial powder coating finish
- Super heavy gauge steel construction
- Recessed locking area protects contents
- Fully welded seams provide maximum strength
- Reinforced overlapping lid provides protection from weather and forced entry
- Heavy duty industrial lid stays prevents accidental closure
- 4 way entry skid for easy handling

Stock No.	Description
JHW50954	48" Wide x 24" Deep x 28⅜" High

JHW50954

JHW3537M

JHW3542

JHWMWS-3510

JHWWS-3510

30° Service Wrenches, Metric

- Ultra thin pattern for use on jam nuts and access to confined areas
- 30° offset head
- Satin chrome finish

Satin Chrome Finish, Metric

Stock No.	Size (in)	Overall Length (in)	Head Diameter	Head Thickness
JHW3519M	19	6 ¼	1 11/16	¼
JHW3521M	21	6 ¼	1 11/16	¼
JHW3522M	22	6 ¼	1 11/16	¼
JHW3524M	24	6 7/8	1 7/8	¼
JHW3527M	27	6 7/8	1 7/8	¼
JHW3530M	30	7	2 1/16	¼
JHW3532M	32	7	2 1/16	¼
JHW3536M	36	7 5/8	2 ½	9/32
JHW3537M	37	7 5/8	2 ½	9/32
JHW3538M	38	7 5/8	2 ½	9/32
JHW3540M	40	7 5/8	2 5/8	9/32
JHW3541M	41	7 5/8	2 5/8	9/32
JHW3542M	42	7 5/8	2 5/8	9/32
JHW3544M	44	7 5/8	2 5/8	9/32
JHW3546M	46	8 ½	3 1/8	5/16
JHW3548M	48	8 ½	3 1/8	5/16
JHW3550M	50	8 ½	3 1/8	5/16
JHW3552M	52	8 ½	3 ½	5/16
JHW3555M	55	8 ½	3 ½	5/16
JHW3560M	60	9 ½	3 ½	5/16
JHW3565M	65	9 ½	3 ½	5/16

Fed. Spec: GGG-W-636E Type 17 Class 3

Made in U.S.A.

JHWMWS-3510 10 Piece Service Wrench Set, MM in Roll Pouch - R11

Contents Include:

Stock No.	Size (MM)	Stock No.	Size (MM)
JHW3519M	19	JHW3530M	30
JHW3521M	21	JHW3532M	32
JHW3522M	22	JHW3536M	36
JHW3524M	24	JHW3538M	38
JHW3527M	27	JHW3540M	40

30° Service Wrenches, SAE

- Ultra thin pattern for use on jam nuts and access to confined areas
- 30° offset head
- Satin chrome finish

Satin Chrome Finish, SAE

Stock No.	Size (in)	Overall Length (in)	Head Diameter	Head Thickness
JHW3524	¾	6 ¼	1 11/16	¼
JHW3526	13/16	6 ¼	1 11/16	¼
JHW3528	⅞	6 ¼	1 11/16	¼
JHW3530	15/16	6 ⅞	1 ⅞	¼
JHW3532	1	6 ⅞	1 ⅞	¼
JHW3534	1 1/16	6 ⅞	1 ⅞	¼
JHW3536	1 ⅛	7	2 1/16	¼
JHW3538	1 3/16	7	2 1/16	¼
JHW3540	1 ¼	7	2 1/16	¼
JHW3542	1 5/16	7 5/8	2 ½	9/32
JHW3544	1 ⅜	7 ⅝	2½	9/32
JHW3546	1 7/16	7 ⅝	2 ½	9/32
JHW3548	1 ½	7 ⅝	2 ½	9/32
JHW3550	1 9/16	7 ⅝	2 ⅝	9/32
JHW3552	1 ⅝	7 ⅝	2 ⅝	9/32
JHW3554	1 11/16	7 ⅝	2 ⅝	9/32
JHW3556	1 ¾	8 ½	3 ⅛	5/16
JHW3558	1 13/16	8 ½	3 ⅛	5/16
JHW3560	1 ⅞	8 ½	3 ⅛	5/16
JHW3562	1 15/16	8 ½	3 ⅛	5/16
JHW3564	2	8 ½	3 ½	5/16
JHW3568	2 ⅛	8 ½	3 ½	5/16
JHW3572	2 ¼	8 ½	3 ½	5/16
JHW3576	2 ⅜	9 ½	3 ½	5/16

Fed. Spec: GGG-W-636E Type 17 Class 3

Made in U.S.A.

JHWWS-3510 10 Piece Service Wrench Set, SAE in Roll Pouch - R11

Contents Include:

Stock No.	Size (MM)	Stock No.	Size (MM)
JHW3524	¾	JHW3534	1 1/16
JHW3526	13/16	JHW3536	1 ⅛
JHW3528	⅞	JHW3538	1 3/16
JHW3530	15/16	JHW3540	1 ¼
JHW3532	1	JHW3544	1 ⅜

⚠ WARNING

15°-60° Double Open End Angle-Head Wrenches

- Wrench heads are offset at 15° and 60° to the handle
- Both ends are the same size to permit the wrench to be used in four different positions
- 45° chamfer on wrench ends allow easy placement of wrench on the fastener
- Continuous arc design minimizes spreading and is stronger than "V" design
- Thin head is perfect for tight clearances
- Satin chrome finish provides good grip and cleans easily

JHW3732

Chrome Satin Finish, SAE

		A	B	C
Stock No.	Size (in)	Head Diameter	Head Thickness	Overall Length (in)
JHW3712	3/8	25/32	7/32	4 3/4
JHW3714	7/16	7/8	7/32	5
JHW3716	1/2	1	7/32	5 1/2
JHW3718	9/16	1 1/8	1/4	6
JHW3720	5/8	1 3/16	9/32	6 1/4
JHW3722	11/16	1 5/16	9/32	7
JHW3724	3/4	1 7/16	9/32	7 1/4
JHW3726	13/16	1 19/32	9/32	7 1/2
JHW3728	7/8	1 21/32	9/32	8 1/4
JHW3732	1	1 15/16	5/16	9 3/4
JHW3734	1 1/16	2 1/16	5/16	10
JHW3736	1 1/8	2 1/4	5/16	11
JHW3740	1 1/4	2 3/8	11/32	11 1/2
JHW3744	1 3/8	2 11/16	13/32	12 1/2
JHW3746	1 7/16	2 11/16	13/32	12 1/2
JHW3748	1 1/2	2 11/16	13/32	12 1/2
JHW3752	1 5/8	3 13/64	15/32	15 3/4
JHW3754	1 11/16	3 11/32	1/2	16 1/2
JHW3756	1 3/4	3 7/16	17/32	17
JHW3758	1 13/16	3 9/16	17/32	17 3/4
JHW3760	1 7/8	3 11/16	9/16	18 1/2
JHW3764	2	3 15/16	19/32	19 1/4

Fed. Spec. ANSI B107.39 Type 2 Class 3

JHW3780

JHW3780 5 Piece Double Open End Wrench Set, SAE, in Roll Pouch

Contents Include:

Stock No.	Size (in)	Stock No.	Size (in)
JHW3712	3/8	JHW3718	9/16
JHW3714	7/16	JHW3720	5/8
JHW3716	1/2		

JHW3782

JHW3782 10 Piece Double Open End Wrench Set, SAE, in Roll Pouch

Contents Include:

Stock No.	Size (in)	Stock No.	Size (in)
JHW3712	3/8	JHW3722	11/16
JHW3714	7/16	JHW3724	3/4
JHW3716	1/2	JHW3726	13/16
JHW3718	9/16	JHW3728	7/8
JHW3720	5/8	JHW3732	1

Made in U.S.A.

JHW1216RSC

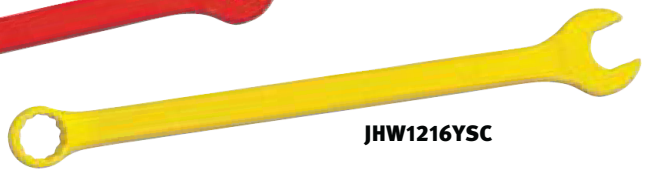

JHW1216YSC



Wrenches

Stock No.	Stock No.	Size (in)	Overall Length (in)	Open End Width (in)	Open End Thickness (in)	Box End Diameter (in)	Box End Thickness (in)
JHW1212RSC	JHW1212YSC	3/8	6 1/2	13/16	3/16	9/16	1/4
JHW1214RSC	JHW1214YSC	7/16	7 1/4	15/16	7/32	11/16	9/32
JHW1216RSC	JHW1216YSC	1/2	8	1 1/16	1/4	3/4	11/32
JHW1218RSC	JHW1218YSC	9/16	8 3/4	1 1/4	1/4	7/8	3/8
JHW1220RSC	JHW1220YSC	5/8	9 1/2	1 3/8	9/32	15/16	13/32
JHW1222RSC	JHW1222YSC	11/16	10 1/4	1 1/2	5/16	1 1/21	7/16
JHW1224RSC	JHW1224YSC	3/4	11	3/16	5/16	1 1/8	1/2
JHW1226RSC	JHW1226YSC	13/16	11 3/4	1 3/4	3/8	1 7/32	17/32
JHW1228RSC	JHW1228YSC	7/8	12 1/2	1 7/8	13/32	1 5/16	9/16
JHW1230RSC	JHW1230YSC	15/16	13 1/4	2	7/16	1 3/8	19/32
JHW1232RSC	JHW1232YSC	1	14	2 1/8	15/32	1 15/32	5/8
JHW1234RSC	JHW1234YSC	1 1/16	14 3/4	2 1/4	1/2	1 9/16	21/32
JHW1236RSC	JHW1236YSC	1 1/8	15 1/2	2 13/32	17/32	1 21/32	11/16
JHW1240RSC	JHW1240YSC	1 3/4	17	2 21/32	9/16	1 13/16	3/4

JHWWS1170RSC

JHWWS1171RSC

JHWWS1172RSC

JHWWS1170YSC

JHWWS1171YSC

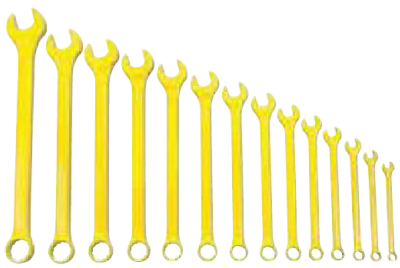

JHWWS1172YSC

Sets

Stock No.	Size (in)	Red			Yellow		
		JHWWS1170RSC	JHWWS1171RSC	JHWWS1172RSC	JHWWS1170YSC	JHWWS1171YSC	JHWWS1172YSC
		7 Pieces Set in Pouch	11 Pieces Set in Pouch	14 Pieces Set in Pouch	7 Pieces Set in Pouch	11 Pieces Set in Pouch	14 Pieces Set in Pouch
JHW1212RSC	3/8	•	•	•	•	•	•
JHW1214RSC	7/16	•	•	•	•	•	•
JHW1216RSC	1/2	•	•	•	•	•	•
JHW1218RSC	9/16	•	•	•	•	•	•
JHW1220RSC	5/8	•	•	•	•	•	•
JHW1222RSC	11/16	•	•	•	•	•	•
JHW1224RSC	3/4	•	•	•	•	•	•
JHW1226RSC	13/16		•	•		•	•
JHW1228RSC	7/8		•	•		•	•
JHW1230RSC	15/16		•	•		•	•
JHW1232RSC	1		•	•		•	•
JHW1234RSC	1 1/16			•			•
JHW1236RSC	1 1/8			•			•
JHW1240RSC	1 3/4			•			•

⚠ WARNING

Combination Ratcheting Wrenches

- 72-tooth gear requires only 5° of ratcheting arc to engage next gear
- High polish satin-chrome finish cleans easily & protects against corrosion
- Thin profile is perfect for tight clearances where accessibility is critical
- 12-point ratcheting box end allows for superior fastener engagement

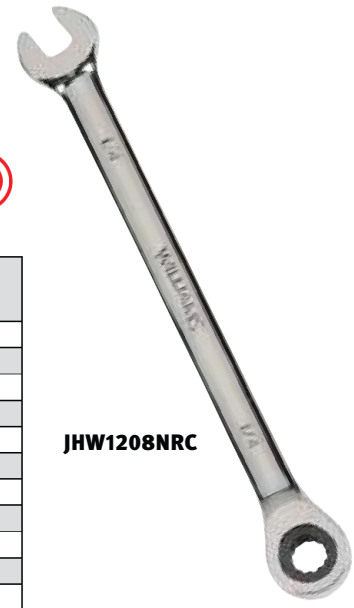

JHW1208NRC

High Polish Chrome Finish, 12 Point, SAE

		A	B	C	D	E
Stock No.	Size (in)	Overall Length (in)	Open End Width (in)	Open End Thickness (in)	Box End Diameter (in)	Box End Thickness (in)
JHW1208NRC	1/4"	5 1/3	3/4	1/4	3/4	1/4
JHW1210NRC	5/16"	5 1/3	3/4	1/4	3/4	1/4
JHW1212NRC	3/8"	6 1/3	3/4	1/4	3/4	1/4
JHW1214NRC	7/16"	6 1/2	1	1/4	3/4	1/4
JHW1216NRC	1/2"	7	1	1/4	1	1/4
JHW1218NRC	9/16"	7 1/2	1 1/4	1/3	1	1/4
JHW1220NRC	5/8"	8 1/2	1 5/16	1/3	1 1/4	3/8
JHW1222NRC	11/16"	9	1 1/2	1/3	1 5/16	3/8
JHW1224NRC	3/4"	10	1 1/2	5/8	1 5/16	3/8
JHW1226NRC	13/16"	11 1/4	1 3/4	5/8	1 5/8	1/2
JHW1228NRC	7/8"	11 1/4	1 3/4	5/8	1 5/8	1/2
JHW1230NRC	15/16"	13	2	5/8	1 3/4	1/2
JHW1232NRC	1"	13	2	5/8	1 3/4	1/2
JHW1234NRC	1 1/16"	14	2 1/8	1/2	2	1/2
JHW1236NRC	1 1/8"	16 3/4	2 1/2	1/2	2 5/16	5/8
JHW1238NRC	1 1/4"	16 3/4	2 1/2	1/2	2 5/16	5/8

JHWS-1120NRC 9 Piece Combination Wrench, in Pouch

Contents Include:

Stock No.	Size (in)	Stock No.	Size (in)
JHW1208NRC	1/4"	JHW1218NRC	9/16"
JHW1210NRC	5/16"	JHW1220NRC	5/8"
JHW1212NRC	3/8"	JHW1222NRC	11/16"
JHW1214NRC	7/16"	JHW1224NRC	3/4"
JHW1216NRC	1/2"		

JHWS-1120NRC

JHWS-1121NRC 11 Piece Combination Wrench, in Pouch

Contents Include:

Stock No.	Size (in)	Stock No.	Size (in)	Stock No.	Size (in)
JHW1212NRC	3/8"	JHW1220NRC	5/8"	JHW1228NRC	7/8"
JHW1214NRC	7/16"	JHW1222NRC	11/16"	JHW1230NRC	15/16"
JHW1216NRC	1/2"	JHW1224NRC	3/4"	JHW1232NRC	1"
JHW1218NRC	9/16"	JHW1226NRC	13/16"		

JHWS-1121NRC

JHWS-1122NRC 16 Piece Combination Wrench, in Pouch

Contents Include:

Stock No.	Size (in)	Stock No.	Size (in)	Stock No.	Size (in)
JHW1208NRC	1/4"	JHW1220NRC	5/8"	JHW1232NRC	1"
JHW1210NRC	5/16"	JHW1222NRC	11/16"	JHW1234NRC	1 1/16"
JHW1212NRC	3/8"	JHW1224NRC	3/4"	JHW1236NRC	1 1/8"
JHW1214NRC	7/16"	JHW1226NRC	13/16"	JHW1238NRC	1 1/4"
JHW1216NRC	1/2"	JHW1228NRC	7/8"		
JHW1218NRC	9/16"	JHW1230NRC	15/16"		

JHWS-1122NRC

Combination Ratcheting Wrenches

- 72-tooth gear requires only 5° of ratcheting arc to engage next gear
- High polish satin-chrome finish cleans easily & protects against corrosion
- Thin profile is perfect for tight clearances where accessibility is critical
- 12-point ratcheting box end allows for superior fastener engagement

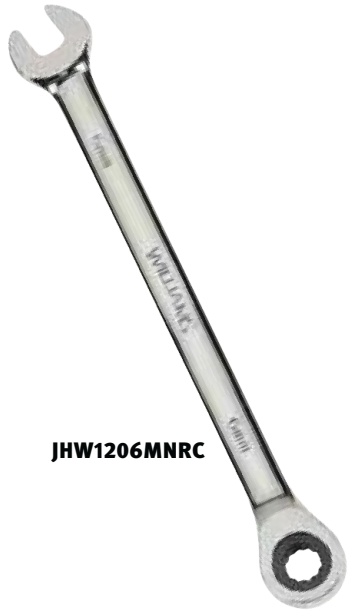

JHW1206MNRC

High Polish Chrome Finish, 12 Point, MM

		A	B	C	D	E
Stock No.	Size (in)	Overall Length (in)	Open End Width (in)	Open End Thickness (in)	Box End Diameter (in)	Box End Thickness (in)
JHW1206MNRC	6	5 3/8	3/4	1/4	1/4	1/4
JHW1207MNRC	7	5 3/8	3/4	1/4	1/4	1/4
JHW1208MNRC	8	5 3/8	3/4	1/4	1/4	1/4
JHW1209MNRC	9	5 5/8	3/4	1/4	1/4	1/4
JHW1210MNRC	10	6 1/2	7/8	1/4	7/8	1/4
JHW1211MNRC	11	6 5/8	1	1/4	7/8	3/8
JHW1212MNRC	12	6 7/8	1	1/4	1	3/8
JHW1213MNRC	13	7 1/8	1	1/4	1	3/8
JHW1214MNRC	14	7 5/8	1 1/4	3/8	1	3/8
JHW1215MNRC	15	7 7/8	1 1/3	3/8	1	3/8
JHW1216MNRC	16	8 1/2	1 1/3	3/8	1 1/4	3/8
JHW1217MNRC	17	9 1/8	1 1/2	3/8	1 1/4	3/8
JHW1218MNRC	18	9 3/8	1 1/2	3/8	1 1/4	1/2
JHW1219MNRC	19	9 7/8	1 5/8	3/8	1 1/4	1/2
JHW1220MNRC	20	11	1 7/8	3/8	1 5/8	1/2
JHW1221MNRC	21	11	1 7/8	3/8	1 5/8	1/2
JHW1222MNRC	22	11	1 7/8	3/8	1 5/8	1/2
JHW1223MNRC	23	11	1 7/8	3/8	1 5/8	1/2
JHW1224MNRC	24	12 3/4	2	3/8	1 7/8	1/2
JHW1225MNRC	25	12 3/4	2	3/8	1 7/8	1/2
JHW1226MNRC	26	12 3/4	2	3/8	1 7/8	1/2
JHW1227MNRC	27	14 1/8	2 1/8	1/2	2	1/2
JHW1228MNRC	28	14 1/8	2 1/8	1/2	2	1/2
JHW1230MNRC	30	16 3/4	2 1/2	1/2	2 3/8	5/8
JHW1232MNRC	32	16 3/4	2 1/2	1/2	2 3/8	5/8

JHMWS-1123NRC 9 Piece Combination Wrench, in Pouch
Contents Include:

Stock No.	Size (MM)	Stock No.	Size (MM)	Stock No.	Size (MM)
JHW1206MNRC	6	JHW1209MNRC	9	JHW1212MNRC	12
JHW1207MNRC	7	JHW1210MNRC	10	JHW1213MNRC	13
JHW1208MNRC	8	JHW1211MNRC	11	JHW1214MNRC	14

JHMWS-1123NRC

JHMWS-1124NRC 14 Piece Combination Wrench, in Pouch
Contents Include:

Stock No.	Size (MM)	Stock No.	Size (MM)	Stock No.	Size (MM)	Stock No.	Size (MM)
JHW1206MNRC	6	JHW1210MNRC	10	JHW1214MNRC	14	JHW1218MNRC	18
JHW1207MNRC	7	JHW1211MNRC	11	JHW1215MNRC	15	JHW1219MNRC	19
JHW1208MNRC	8	JHW1212MNRC	12	JHW1216MNRC	16		
JHW1209MNRC	9	JHW1213MNRC	13	JHW1217MNRC	17		

JHMWS-1124NRC

JHMWS-1125NRC 19 Piece Combination Wrench, in Pouch
Contents Include:

Stock No.	Size (MM)	Stock No.	Size (MM)	Stock No.	Size (MM)	Stock No.	Size (MM)
JHW1206MNRC	6	JHW1211MNRC	11	JHW1216MNRC	16	JHW1221MNRC	21
JHW1207MNRC	7	JHW1212MNRC	12	JHW1217MNRC	17	JHW1222MNRC	22
JHW1208MNRC	8	JHW1213MNRC	13	JHW1218MNRC	18	JHW1223MNRC	23
JHW1209MNRC	9	JHW1214MNRC	14	JHW1219MNRC	19	JHW1224MNRC	24
JHW1210MNRC	10	JHW1215MNRC	15	JHW1220MNRC	20		

JHMWS-1125NRC

JHMWS-1126NRC 25 Piece Combination Wrench, in Pouch
Contents Include:

Stock No.	Size (MM)	Stock No.	Size (MM)	Stock No.	Size (MM)	Stock No.	Size (MM)	Stock No.	Size (MM)
JHW1206MNRC	6	JHW1211MNRC	11	JHW1216MNRC	16	JHW1221MNRC	21	JHW1226MNRC	26
JHW1207MNRC	7	JHW1212MNRC	12	JHW1217MNRC	17	JHW1222MNRC	22	JHW1227MNRC	27
JHW1208MNRC	8	JHW1213MNRC	13	JHW1218MNRC	18	JHW1223MNRC	23	JHW1228MNRC	28
JHW1209MNRC	9	JHW1214MNRC	14	JHW1219MNRC	19	JHW1224MNRC	24	JHW1230MNRC	30
JHW1210MNRC	10	JHW1215MNRC	15	JHW1220MNRC	20	JHW1225MNRC	25	JHW1232MNRC	32

JHMWS-1126NRC

⚠ WARNING

JHW30012

JHW30012 Square and Hex Drive Ratchet

- Length 5"
- Drives ¼" Drive Sockets & ¼" Hex Bits

JHWRFW-24

JHWXFN-1618

Ratcheting Flare Nut Wrenches

- Designed for use on 6 and 12 point tube fittings, fasteners, valves and compression fittings.
- Unique design requires only 30° rotation for ratcheting action.
- High carbon steel jaws snap open, then close around fastener with 6 point contact.
- Prevents distortion of thin-walled fitting.
- Allow easy access to tight locations.

Black Industrial Finish, 12 Point, SAE

Stock No.	Size (in)	Overall Length (in)	Head Diameter (in)	Head Thickness (in)
JHWRFW-12	3/8	5 3/8	1	5/16
JHWRFW-14	7/16	5 3/8	1	5/16
JHWRFW-16	1/2	5 3/8	1	5/16
JHWRFW-18	9/16	7 1/4	1 1/32	3/8
JHWRFW-20	5/8	7 1/4	1 1/32	3/8
JHWRFW-22	11/16	7 1/4	1 1/32	3/8
JHWRFW-24	3/4	7 1/4	1 1/32	3/8
JHWRFW-26	13/16	9 5/16	1 5/8	1/2
JHWRFW-28	7/8	9 5/16	1 5/8	1/2
JHWRFW-30	15/16	9 5/16	1 5/8	1/2
JHWRFW-32	1	9 5/16	1 5/8	1/2

Made in U.S.A.

JHWWS-14

Double Head Flare Nut Wrenches

- Will not mar fittings on pipes and tubing.
- Satin chrome textured finish provides great feel and extra gripping power.
- Recessed corners in ends provide extra turning power.

Chrome Satin Finish, 6 Point, SAE

Stock No.	Size (in)	A Overall Length (in)	B Open End Dia (in)	C Open End Thickness (in)	D Open End Dia (in)	E Open End Thickness (in)
JHWXFN-0810	1/4 x 5/16	4 27/32	19/32	1/4	5/8	9/32
JHWXFN-1214	3/8 x 7/16	5 13/16	25/32	5/16	27/32	11/32
JHWXFN-1618	1/2 x 9/16	6 13/16	15/16	3/8	1	13/32
JHWXFN-2022	5/8 x 11/16	7 3/4	1 3/32	7/16	9/16	15/32
JHWXFN-2432	3/4 x 1	9 1/2	1 1/4	1/2	19/32	5/8
JHWXFN-2836	7/8 x 1 1/8	10.5	1 7/16	9/16	1 3/4	11/16

Fed. Spec.: ANSI B107.6

JHWWS-14 5 Piece Double Head Flare Nut Wrench Set, 6 Point, SAE, in Roll Pouch – R-4

Contents Include:

Stock No.	Size (in)
JHWXFN-1214	3/8 x 7/16
JHWXFN-1618	1/2 x 9/16
JHWXFN-2022	5/8 x 11/16
JHWXFN-2432	3/4 x 1
JHWXFN-2836	7/8 x 1 1/8

Made in U.S.A.

JHWAP-10A

Adjustable Wrench

- Chrome plated finish allows for easy cleaning after each use.
- Serrated knurl is designed for quick and smooth adjustments.
- I-Beam designed handle provides strength and durability.
- Inch (SAE) scale is laser-etched on head face for easy determination of bolt head width.

Chrome Finish

Stock No.	Length (in)	Maximum Jaw Opening (in)	Head Thickness (in)
JHWAP-4A	4	½	11/32
JHWAP-6A	6	¾	7/16
JHWAP-8A	8	1	½
JHWAP-10A	10	1 11/64	39/64
JHWAP-12A	12	1 5/16	23/32
JHWAP-15A	15	1 11/16	51/64
JHWAP-18A	18	2 1/16	57/64
JHWAP-24A	24	2 7/16	1 9/64

Made in U.S.A.

JHWAB-10A

Adjustable Wrench

- Drop forged, heat treated industrial finish with satin finish handles for firm safe grip.
- Inch (SAE) scale is laser-etched on head face for easy determination of bolt head width.

Black Finish

Stock No.	Length (in)	Maximum Jaw Opening (in)	Head Thickness (in)
JHWAB-4A	4	½	11/32
JHWAB-6A	6	¾	7/16
JHWAB-8A	8	1	½
JHWAB-10A	10	1 11/64	39/64
JHWAB-12A	12	1 5/16	23/32
JHWAB-15A	15	1 11/16	51/64
JHWAB-18A	18	2 1/16	57/64
JHWAB-24A	24	2 7/16	1 9/64

Made in U.S.A.

Adjustable Wrench

- Comfort thermoplastic grips cushion the handle surface and stay comfortable even in extreme temperatures.
- Chrome plated finish allows for easy cleaning.
- Serrated knurl is designed for quick and smooth adjustments.
- I-Beam designed handle provides strength and durability.
- Inch (SAE) scale is laser-etched on head face for easy determination of bolt head width.

Comfort Grip

Stock No.	Length (in)	Maximum Jaw Opening (in)	Head Thickness (in)
JHWAPC-6A	4	¾	7/8
JHWAPC-8A	6	1	½
JHWAPC-10A	10	1 11/64	39/64
JHWAPC-12A	12	1 5/8	23/32

Made in U.S.A.

JHWAPC-10A

⚠ WARNING

WRENCHES

JHW13404

JHW13610

Adjustable Wrenches

- Measurement scale on head conveniently shows fastener size.
- Chrome wrenches are fully polished for easy clean-up.
- Exceed ANSI specifications for strength.
- Precision hardened and anti-corrosion treated.

Heavy Duty Industrial Grade Adjustable Wrenches

Stock No.	Length (in)	Maximum Jaw Opening (in)	Head Thickness (in)
Chrome Finish:			
JHW13404	4	1/2	11/32
JHW13406	6	15/16	7/16
JHW13408	8	1 3/16	1/2
JHW13410	10	1 3/8	5/8
JHW13412	12	1 5/8	23/32
JHW13415	15	1 25/32	15/16
JHW13418	18	2 3/16	1 1/32
JHW13424	24	2 7/16	1 1/8
Black Phosphate Finish:			
JHW13604	4	1/2	11/32
JHW13606	6	15/16	7/16
JHW13608	8	1 3/16	1/2
JHW13610	10	1 3/8	5/8
JHW13612	12	1 5/8	23/32
JHW13615	15	1 25/32	15/16
JHW13618	18	2 3/16	1 1/32
JHW13624	24	2 7/16	1 1/8

Fed. Spec.: ANSI B107.8M

JHW13110

JHW13342

JHW13642

JHW13342 4 Piece Chrome Adjustable Wrench Set, in Vinyl Pouch – 50005

Contents Include:

Stock No.	Size (in)
JHW13406	6
JHW13408	8
JHW13410	10
JHW13412	12

JHW13642 4 Piece Black Adjustable Wrench Set, in Vinyl Pouch – 50005

Contents Include:

Stock No.	Size (in)
JHW13606	6
JHW13608	8
JHW13610	10
JHW13612	12

Ratcheting Adjustable Wrenches

- Easy to use in limited space

Comfort Grip

Stock No.	Overall Length (in)	Maximum Jaw Opening (in)	Head Thickness (in)
JHW13106	6	13/16	7/16
JHW13108	8	15/16	9/16
JHW13110	10	1 3/16	11/16

JHW13342 3 Piece Ratcheting Adjustable Set, in Pouch

Contents Include:

Stock No.	Size (in)
JHW13106	6
JHW13108	8
JHW13110	10

Adjustable Construction Wrench

- Tapered spud handle locates and aligns bolts and rivets.
- Hole in handle permits tethering wrench for safety.
- Measurement scale on head conveniently shows fastener size.
- Economical black phosphate finish resists rust.

Heavy-Duty With Polished Head and Measurement Scales

Stock No.	Length (in)	Maximum Jaw Opening (in)	Head Thickness (in)
JHW13625	16	1 ½	23/32

JHW13625

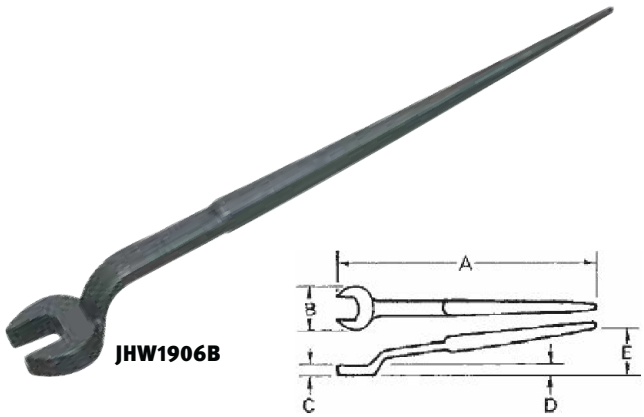

JHW1906B

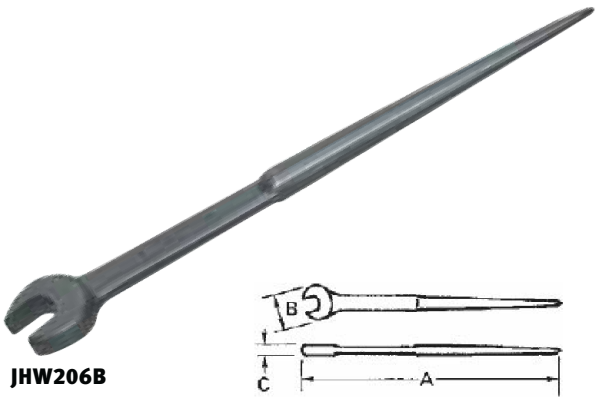

JHW206B

Single Head Open End Offset Structural Wrenches

- Long offset handle is designed for clearance of obstructions while providing greater leverage.
- Tapered spud handle locates and aligns bolt and rivet holes.

Industrial Black Finish, SAE

		A	B	C	D
Stock No.	Size (in)	Overall Length (in)	Open End Width (in)	Open End Thickness (in)	Handle Offset (in)
JHW1904A	¾	11 9/16	1 19/32	15/32	⅞
JHW1905	⅞	14 5/16	2	9/16	1
JHW1906	15/16	14 3/16	1 31/32	19/32	1
JHW1906B	1	14 ¼	2	19/32	1
JHW1907	1 1/16	16 13/16	2 5/32	⅝	1 ⅛
JHW1907A	1⅛	16 13/16	2 ¼	⅝	1 ⅛
JHW1908	1 ¼	17 1/16	2 23/32	1/16	1 ¼
JHW1908A	1 5/16	18 ¾	2 13/16	23/32	1 ¼
JHW1909	1 7/16	19 ¾	3 5/32	25/32	1 ¼
JHW1909A	1 ½	19 ⅞	3 5/32	25/32	1 ½
JHW1910	1 ⅝	21 1/16	3 7/32	⅞	1 ½
JHW1911	1 13/16	23	3 ¾	1 ¾	1 ⅝
JHW1911A	1 ⅞	22 13/16	3 25/32	31/32	1 ⅝
JHW1912	2	23 ¾	4 7/32	31/32	1 ⅝

Made in U.S.A.

Single Head Open End Construction Wrenches

- 15° open end provides two gripping angles when wrench is turned over.
- Tapered spud handle locates and aligns bolt and rivet holes.

Industrial Black Finish, SAE

		A	B	C
Stock No.	Size (in)	Overall Length (in)	Open End Width (in)	Open End Thickness (in)
JHW204A	¾	12	1 23/32	15/32
JHW205	⅞	14 ¼	2 1/16	19/32
JHW206	15/16	14 ¾	2 ⅛	19/32
JHW206B	1	13 ⅛	2 3/32	½
JHW207	1 1/16	16 9/16	2 7/16	21/32
JHW207A	1 ⅛	17	2 9/16	11/16
JHWQ-208	1 ¼	18 15/16	2 23/32	23/32
JHW208A	1 5/16	19	2 27/32	¾
JHW209	1 7/16	21 ⅛	3 ⅜	27/32
JHW209A	1 ½	18 ¾	2 ¾	13/16
JHWQ-210	1 ⅝	22 11/16	3 21/32	⅞
JHW211	1 13/16	25	4 ½	1 1/32
JHW211A	1 ⅞	25 ⅛	4 9/16	1 1/16

Made in U.S.A.

⚠ WARNING

Offset Structural Box Wrenches

- Offset from handle to permit clearance of obstructions
- Handles are tapered for insertion into bolt holes
- Industrial Black Finish

Industrial Black Finish, SAE

		A	B	C
Stock No.	Size (in)	Overall Length (in)	Head Diameter (in)	Offset at End
JHW8905A	13/16	12	1 15/32	1 25/32
JHW8905	7/8	12	1 15/32	1 25/32
JHW8906	15/16	12	1 5/8	1 61/64
JHW8906B	1	12	1 5/8	1 61/64
JHW8907	1 1/16	15	1 53/64	2 9/64
JHW8907A	1 1/8	15	1 53/64	2 9/64
JHW8908	1 1/4	17	2 5/64	2 21/64
JHW8908A	1 5/16	17	2 5/64	2 21/64
JHW8909	1 7/16	21	2 3/8	2 3/4
JHW8909A	1 1/2	21	2 3/8	2 3/4
JHW8910	1 5/8	22	2 5/8	2 7/8
JHW8910A	1 11/16	22	2 5/8	2 7/8
JHW8911	1 13/16	23	2 29/32	3
JHW8911A	1 7/8	23	2 29/32	3
JHW8912	2	24 1/2	3 5/32	3 5/32
JHW8913	2 3/16	26	3 15/32	3 1/2
JHW8914	2 3/8	28	3 23/32	3 11/16
JHW8915	2 9/16	30	3 29/32	3 13/16
JHW8916	2 3/4	30	4 5/32	3 29/32

Fed. Spec: GGG-W-636E Type 9 Class 2

Made in U.S.A.

JHW8907A

Hammer Wrenches

- Designed for use in the petrochemical industries where clearance, particularly on flanges, and cored fasteners are often a problem:
- 6 Point Hex is offset 15 degree, and short handle length allows for use in tight spaces
- Straight Handle transfers maximum torque when struck
- Assortment fits Stud Sizes up to 2-1/2"

6 Point

Stock No.	Wrench Opening (Nut Size)	Head Dia.	Head Thickness	Overall Length
JHW-6034	1 1/16	1 25/32	5/8	9 7/8
JHW-6040	1 1/4	2	23/32	10 1/4
JHW-6046	1 7/16	2 17/64	7/8	10 9/16
JHW-6052	1 5/8	2 31/64	61/64	11
JHW-6058	1 13/16	2 21/32	63/64	11 5/16
JHW-6064	2	3 1/32	1 7/32	11 11/16
JHW-6070	2 3/16	3 9/32	1 1/4	12
JHW-6076	2 3/8	3 13/32	1 7/16	12 3/8
JHW-6082	2 9/16	3 3/4	1 17/32	12 11/16
JHW-6088	2 3/4	4 11/64	1 17/32	13 1/16
JHW-6094	2 15/16	4 23/64	1 17/32	13 7/16
JHW-6100	3 1/8	4 31/64	1 5/8	13 13/16
JHW-6112	3 1/2	4 31/32	1 23/32	14 1/8
JHW-6124	3 7/8	5 35/64	1 23/32	14 1/2

Made in U.S.A.

JHW-6034

JHW33903

20 Piece 3/4" Socket Set

- Extended Handle extends from 23-1/2" to 36"
- Sockets feature SUPERTORQUE® lobular openings for greater turning power without deforming the fastener
- Packed in rugged high-density polyethylene (HDPE) cases that are strong and durable yet light in weight
- Case is shock proof at both high and low temperatures, equipped with heavy-duty metal latches and hinges
- Two-component handles are easy to grip and comfortable to carry

12 Point Rugged-Case-System Tool Set, SAE

Stock No.	Description
JHW33903	20 Piece ¾" Socket Set

Contents Include:

3/4" Drive Tools:		3/4" Drive Shallow 12 Point Sockets	
Stock No.	Description	Stock No.	Size (in)
JHW33003	8" Extension	JHW33236	1 ⅛
JHW33004	16" Extension	JHW33240	1 ¼
JHW33012	32 Tooth Ratchet Head	JHW33242	1 5⁄16
JHW33013	Universal Extendable Handle	JHW33244	1 ⅜
JHW33014	Sliding T-Handle	JHW33246	1 7⁄16
		JHW33248	1 ½
3/4" Drive Shallow 12 Point Sockets		JHW33252	1 ⅝
Stock No.	Size (in)	JHW33256	1 ¾
JHW33228	⅞	JHW33258	1 13⁄16
JHW33230	15⁄16	JHW33260	1 ⅞
JHW33232	1	JHW33264	2
JHW33234	1 1⁄16		

JHW33905

25 Piece 3/4" Socket Set

- All tools are professional quality, made of high-grade chrome vanadium steel
- Sockets feature SUPERTORQUE® lobular openings for greater turning power without deforming the fastener
- Packed in rugged high-density polyethylene (HDPE) cases that are strong and durable yet light in weight
- Case is shock proof at both high and low temperatures, equipped with heavy-duty metal latches and hinges
- Two-component handles are easy to grip and comfortable to carry

12 Point with Metal Box, SAE

Stock No.	Description
JHW33905	25 Piece ¾" Socket Set

Contents Include:

3/4" Drive Tools:		3/4" Drive Shallow 12 Point Sockets	
Stock No.	Description	Stock No.	Size (in)
JHW33001	2 Piece Ratchet	JHW33240	1 ¼
JHW33002	4" Extension	JHW33242	15⁄16
JHW33003	8" Extension	JHW33244	1 ⅜
JHW33004	16" Extension	JHW33246	1 7⁄16
3/4" Drive Shallow 12 Point Sockets		JHW33248	1 ½
Stock No.	Size (in)	JHW33252	1 ⅝
JHW33228	⅞	JHW33256	1 ¾
JHW33230	15⁄16	JHW33258	1 13⁄16
JHW33232	1	JHW33260	1 ⅞
JHW33234	1 1⁄16	JHW33264	2
JHW33236	1 ⅛	JHW33268	2 ⅛
JHW33238	1 3⁄16	JHW33272	2 ¼

⚠ WARNING

PIPE WRENCHES

WILLIAMS®

Pipe Wrenches

- Aluminum pipe wrenches are approximately 40% lighter than cast iron.
- Heavy duty construction for strength and durability.
- Scale on wrench indicates pipe diameter.

Aluminum, Heavy Duty

Stock No.	Overall Capacity (in)	Maximum Jaw Opening (in)	Spare Parts		
			Hook Jaw	Heel Jaw & Pin	Knurl Nut
JHW13500	8	1 5/16	JHW13551	JHW13567	JHW13571
JHW13502	10	1 5/8	JHW13552	JHW13562	JHW13572
JHW13504	12	2 1/8	JHW13553	JHW13563	JHW13573
JHW13506	14	2 9/16	JHW13554	JHW13564	JHW13574
JHW13508	18	3 1/8	JHW13555	JHW13565	JHW13575
JHW13510	24	3 3/4	JHW13556	JHW13566	JHW13576
JHW13512	36	5	JHW13557	JHW13568	JHW13577
JHW13514	48	6	JHW13558	JHW13569	JHW13578

Pipe Wrench Set

Stock No.	Contents Include:
JHW13542	3 Piece Aluminum Pipe Wrench Set. Includes 8", 12", and 18" wrenches

Pipe Wrenches

- Heavy duty construction for strength and durability
- Scale on wrench indicates pipe diameter

Cast Iron, Heavy-Duty

Stock No.	Overall Capacity (in)	Maximum Jaw Opening (in)	Spare Parts		
			Hook Jaw	Heel Jaw & Pin	Knurl Nut
JHW13516	6	7/8	JHW13550	JHW13560	JHW13570
JHW13518	8	1 5/16	JHW13511	JHW13567	JHW13571
JHW13520	10	1 5/8	JHW13552	JHW13562	JHW13572
JHW13522	12	2 1/8	JHW13553	JHW13563	JHW13573
JHW13524	14	2 9/16	JHW13554	JHW13564	JHW13574
JHW13526	18	3 1/8	JHW13555	JHW13565	JHW13575
JHW13528	24	3 3/4	JHW13556	JHW13566	JHW13576
JHW13530	36	5	JHW13557	JHW13568	JHW13577
JHW13532	48	6	JHW13558	JHW13569	JHW13578

Pipe Wrench Set

Stock No.	Contents Include:
JHW13544	3 Piece Cast Iron Pipe Wrench Set. Includes 8", 12", and 18" wrenches

Chain Pipe Tongs

The Original Williams Chain Pipe Tong

- Chain swings from the center and can be used on either side of the jaws, reducing tooth wear.
- Flat link chains are heat-treated for greater strength and reliability.
- Fully adjustable to fit any shape pipe.

Stock No.	Pipe Minimum Diameter (in)	Pipe Maximum Diameter (in)	Tong Length (in)	Chain Length (in)
JHWCT-12	¼	2½	27	18 ½
JHWCT-13	¾	4	38 ⅛	25
JHWCT-13-1/2	1	6	46 ¼	33
JHWCT-14	1 ½	8	50 ½	40 ¾
JHWCT-15	2	12	67	56

Replacement Parts for Pipe Tongs

- Chain is heat-treated after assembly which results in a 40 % increase in strength as well as an extended chain life and improved performance.
- Jaws are drop forged from carbon steel and heat treated to provide the strength and reliability expected from Williams pipe tools.

Stock No.	Replacement Jaw Sets	Replacement Chain Assembly		
	Product Code	Stock No.	Length (in)	Loading Capacity
JHWCT-12	JHWCT-12-4	JHWCT-12-1	18 ½	13,800
JHWCT-13	JHWCT-13-4	JHWCT-13-1	25	17,600
JHWCT-13-1/2	JHWCT-13-1/2-4	JHWCT-13-1/2-1	33	20,000
JHWCT-14	JHWCT-14-4	JHWCT-14-1	40 ¾	22,000
JHWCT-15	JHWCT-15-4	JHWCT-15-1	56	31,000

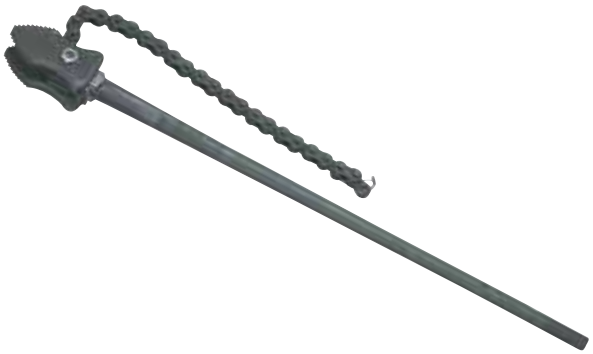

JHWCT-13

JHWCT-13-1/2

JHWCT-13-4

JHWCW-4

Pipe Chain Wrench

- Forged handle is fully heat-treated.
- Ideal for use in close quarters and where space is at a premium.
- Successive “bites” can be taken without removal of wrench from the work piece.
- Fully adjustable to fit any shape pipe.

Heat Treated

Stock No.	Pipe Diameter Minimum - Maximum (Pipe Size)	Handle Length (in)	Chain Length (in)
JHWCW-4	⅜ - 4	11	15

JHW40223

Pipe Chain Wrench

- Forged strong I Beam handle.
- Designed for working in confined areas when regular pipe wrenches will not fit, excellent for pipe fittings.
- Portable and lightweight can be used for overhead and underground work.

Heat Treated

Stock No.	Pipe Diameter Capacity	Handle Length (in)	Chain Length (in)
JHW40222	4	12	16
JHW40223	5	15	19
JHW40224	6	24	23

⚠ WARNING

Made in U.S.A.

BIT SET

WILLIAMS®

72 Piece Bit Set

- S2 material for higher torque, optimum durability and performance.
- All parts are engineered and produced according to ANSI standard.
- The set also includes a magnetic bit holder allowing for quick change of driving bits.
- Folding case design is compact and robust with pivoting dual bit holders that allow for easy and quick access to the accessories
- Industrial case is made from a highly durable, plastic material

JHW24900

Stock No.	Description
JHW24900	72 Piece Bit Set

Contents Include:

Hex

Stock No.	Size	Length
JHW24914	1/4	1"
JHW24912	3/16	1"
JHW24915	5/16	1"
JHW24911	5/32	1"
JHW24913	7/32	1"

Phillips

Stock No.	Size	Length
JHW24918	1	1"
JHW24931	2	1"
JHW24901	3	1"
JHW24927	1	2"
JHW24916	2	2"
JHW24928	3	2"

Pozidriv

Stock No.	Size	Length
JHW24932	2	1"
JHW24902	3	1"
JHW24917	2	2"
JHW24929	3	2"

Square

Stock No.	Size	Length
JHW24907	2	1"
JHW24908	3	1"
JHW24930	2	2"

Slotted Tip

Stock No.	Size	Length
JHW24903	6-8	1"
JHW24904	8-10	1"
JHW24905	10-12	1"
JHW24906	12-14	1"
JHW24936	8-10	2"
JHW24937	10-12	2"
JHW24938	12-14	2"

Torx

Stock No.	Size	Length
JHW24919	7	1"
JHW24920	8	1"
JHW24921	10	1"
JHW24922	15	1"
JHW24923	20	1"
JHW24924	25	1"
JHW24925	27	1"
JHW24909	30	1"
JHW24926	30	1"
JHW24910	40	1"
JHW24933	15	2"
JHW24934	20	2"
JHW24935	25	2"

Nut Driver

Stock No.	Size	Length
JHW24941	1/4	1"
JHW24944	11/32	1"
JHW24940	3/16	1"
JHW24945	3/8	1"
JHW24943	5/16	1"
JHW24939	5/32	1"
JHW24946	7/16	1"
JHW24942	9/32	1"

Hex Magnetic Holder

Stock No.	Description
JHW24947	Hex Magnetic Holder

Fluted Screw Extractors

- Designed for quick, easy removal of left or right-handed broken screws, bolts, studs or other threaded forms.
- Drill bit sizes to be used are stamped on each extractor.
- A hole is first drilled in the broken stem and the right size Williams extractor is then inserted.

JHWEX-26A

JHWEXS-30

JHWEXS-10

Straight, Tapered Flutes

Stock No.	Drill Size (in)	For Use on Bolt Sizes (in)
JHWEX-21A	1/8	1/4 to 5/16
JHWEX-21B	3/16	3/8
JHWEX-22A	7/32	7/16
JHWEX-24A	5/16	1/2 to 9/16
JHWEX-25B	3/8	5/8
JHWEX-25A	15/32	3/4
JHWEX-26A	9/16	7/8
JHWEX-28	21/32	1 to 1 1/8
JHWEX-29	13/16	1 1/4 to 1 3/8
JHWEX-30	1 1/16	1 1/2

JHWEXS-30 6 Piece Screw Extractor Set
Contents Include:

Stock No.	Stock No.	Stock No.
JHWEX-21A	JHWEX-22A	JHWEX-25B
JHWEX-21B	JHWEX-24A	JHWEX-25A

JHWEXS-10 10 Piece Screw Extractor Set
Contents Include:

Stock No.	Stock No.	Stock No.	Stock No.	Stock No.
JHWEX-21A	JHWEX-22A	JHWEX-25B	JHWEX-26A	JHWEX-29
JHWEX-21B	JHWEX-24A	JHWEX-25A	JHWEX-28	JHWEX-30

Made in U.S.A.

LightWeight Handle Pry Bars

- Designed with drop forged hardened steel point & wedge ends
- Rust resistant black finish
- Pry bar is chemically bonded to the fiberglass handle.
- Half the weight of steel pry bars
- Handle resists heat & cold less flex than a steel bar
- Non-Conductive fiberglass provides insulation from electrical shock
- Used by:
  - Contractors & mechanics for construction & auto repair
  - Municipalities for safe prying, lifting & digging
  - Fire & Police - Forcible entry

JHWC-90

JHWC-100

Single Curved Tip

Stock No.	Overall Length (in)	Product Code	Overall Length (in)
JHWC-90	30	JHWC-92	41 1/2
JHWC-91	35 1/2	JHWC-93	48 1/2

Double End

Stock No.	Overall length (in)	Stock No.	Overall length (in)
JHWC-100	33	JHWC-102	44
JHWC-101	38	JHWC-103	50

⚠ WARNING

HAMMERS

WILLIAMS®

Sledge Hammers

- High carbon steel, heat treated and tempered head, with hickory handle

JHWSH-8A

Wood Handle

Stock No.	Weight (lbs.)	Handle Length (in)	Overall length (in)	Face Diameter (in)
JHWSH-2A	2	15	15	1 ½
JHWSH-4A	4	15	15	2
JHWSH-6A	6	36	36	2 ⅛
JHWSH-8A	8	36	36	2 ⅓
JHWSH-10A	10	36	36	2 ½
JHWSH-12A	12	36	36	2 ⅝
JHWSH-16A	16	36	36	2 ¾

Replacement Handle Service Kit

Stock No.	Description	Weight (ozs.)	Length (in)
JHWSHHW-14A	Handle	14	15
JHWSHHW-32A	Handle	24	36

Made in U.S.A.

Fiberglass Handle

- Double faced head is hardened and tempered forged for maximum strength and durability.
- All kits include replacement handle, pre-measured bonding mix, mix container and instructions

JHWSHF-10LA

JHWSHF-4A

Stock No.	Weight Class (lbs)	Handle Length (in)	Overall length (in)	Face Diameter (in)
JHWSHF-4SA **	4	14	14	1 ¼
JHWSHF-8SA **	8	32	32	2
JHWSHF-12SA **	12	32	32	2 ¼
JHWSHF-2A	2	14	14	1 ¼
JHWSHF-3A	3	14	14	1 ½
JHWSHF-4A	4	14	14	1 ⅝
JHWSHF-6A	6	32	32	1 ¾
JHWSHF-8A	8	32	32	2
JHWSHF-10A	10	16	16	2 ⅛
JHWSHF-10LA	10	32	32	2 ⅛
JHWSHF-12A	12	32	32	2 ¼
JHWSHF-16A	16	24	24	2 ⅝
JHWSHF-16LA	16	32	32	2 ⅝
JHWSHF-20A	20	36	36	2 ¾

** Soft steel safety head is similar in hardness to brass

** Ideal replacement for Brass Head where non-sparking is not required

Replacement Handle Service Kit

Stock No.	Description	Weight (lbs)	Length (in)
JHWSHHF-14A	Fiberglass	2 to 4	14
JHWSHHF-16A	Fiberglass	6 to 8	16
JHWSHHF-32A	Fiberglass	6 to 16	32
JHWSHHF-36	Fiberglass	20	36

Made in U.S.A.

Dead Blow Sledge Hammers With Replacement Tips

- Shot loaded dead blow heads deliver the impact of a steel hammer with little or no rebound
- Oversized head and striking face minimizes miss hits, applying force with greater impact and repeatability
- Strong yet light weight handles provide 90% of the total hammer weight at the head 4" Non-marring removable tips can be replaced when worn

JHWSHSFDB-8

Stock No.	Weight (lbs)	Handle Length (in)	Overall length (in)	Face Diameter (in)
JHWSHSFDB-8	8	29	32	2

Includes Two 4" Black Tips
4" Replacement Tip

Stock No.	Hardness	Color	Stock No.	Hardness	Color
JHWSHSFDB-40S	Soft	Brown	JHWSHSFDB-40N	Med/Hard	Cream
JHWSHSFDB-40M	Medium	Red	JHWSHSFDB-40H	Hard	Black
JHWSHSFDB-40T	Tough	Green	JHWSHSFDB-40XH	Extra hard	Yellow

JHWSHSFDB-40H

JHWSHSFDB-40M

JHWSHSFDB-40N

JHWSHSFDB-40S

JHWSHSFDB-40T

JHWSHSFDB-40XH

WILTON

Wilton® Bash™ Cross Pein Hammers With Unbreakable™ Handle Technology

Stock No.	Description
WMH30216	2 Lb Head, Cross Pein Hammer, 16" BASH Handle
WMH30316	3 Lb Head, Cross Pein Hammer, 16" BASH Handle

WMH30216

Wilton® Bash™ Ball Pein Hammers With Unbreakable™ Handle Technology

- UNBREAKABLE™ TECHNOLOGY steel core eliminates breaking during overstrikes
- HIGH VIS HEAD - Soft Face Hammer's 30 HRC head mushrooms while striking harder materials, promoting safety on the jobsite
- SAFETY PLATE - locks head firmly to handle to prevent head dislodging
- ANTI-VIBE NECK - thick, tapered neck absorbs vibration reducing worker fatigue
- NO-SLIP GRIP - vulcanized rubber handle for secure girp while striking
- LANYARD HOLE - safely secure hammer to wrist or stationary object
- APPLICATIONS: Construction and Maintenenance where safety is a consideration

WMH32414

Stock No.	Description
WMH32414	24 Oz Head, Ball Pein Hammer, 14" BASH Handle
WMH33214	32 Oz Head, Ball Pein Hammer, 14" BASH Handle
WMH34014	40 Oz Head, Ball Pein Hammer, 14" BASH Handle

⚠ WARNING

SLEDGE HAMMERS

B.A.S.H. Unbreakable Handle Hammers

- UNBREAKABLE™ TECHNOLOGY steel core eliminates breaking during overstrikes
- HIGH VIS HEAD - drop forged 46 HRC head endures the most demanding applications
- SAFETY PLATE - locks head firmly to handle to prevent head dislodging
- ANTI-VIBE NECK - thick, tapered neck absorbs vibration reducing worker fatigue
- NO-SLIP GRIP - vulcanized rubber handle for secure girp while striking
- LANYARD HOLE - safely secure hammer to wrist or stationary object
- APPLICATIONS: Demolotion Work, Fracturing Stone and Concrete, DrivingFence Posts, Driving Stakes, Rebar Work, Railroads, Police, Fire and Resuce.

WMH20212

Stock No.	Head Size - .lbs	Handle Size - inch
WMH20212	2-½	12
WMH20412	4	12
WMH20416	4	16
WMH20424	6	24
WMH20630	6	30
WMH20636	6	36
WMH20824	8	24
WMH20830	8	30
WMH20836	8	36
WMH21024	10	24
WMH21030	10	30
WMH21036	10	36
WMH21224	12	24
WMH21230	12	30
WMH21236	12	36
WMH21430	14	30
WMH21436	14	36
WMH22036	20	36

WMH20836

B.A.S.H. Unbreakable Handle Soft Face Sledge Hammers

- UNBREAKABLE™ TECHNOLOGY steel core eliminates breaking during overstrikes
- HIGH VIS HEAD - Soft Face Hammer's 30 HRC head mushrooms while striking harder materials, promoting safety on the jobsite
- SAFETY PLATE - locks head firmly to handle to prevent head dislodging
- ANTI-VIBE NECK - thick, tapered neck absorbs vibration reducing worker fatigue
- NO-SLIP GRIP - vulcanized rubber handle for secure girp while striking
- LANYARD HOLE - safely secure hammer to wrist or stationary object
- APPLICATIONS: Mining, Railroads, Cutting Tools, Maintenenance on hard metal surfaces.

WMH20412

Stock No.	Head Size - .lbs	Handle Size - inch
WMH40212	2-½	12
WMH40412	4	12
WMH40416	4	16
WMH40624	6	24
WMH40636	6	36
WMH40824	8	24
WMH40836	8	36
WMH41036	10	36
WMH41236	12	36
WMH41436	14	36

WMH20824

BAHBE9881S - 5 Piece ERGO® Phillips / Slotted Insulated Set

Stock No.	Overall Length	Blade Length	Tip Width/Point Size
BAHBE-8220S	9	4	1/8
BAHBE-8040S	8 3/4	4	5/32
BAHBE-8050S	8 3/4	4	7/32
BAHBE-8610S	8	3 5/32	# 1 PH
BAHBE-8620S	8 3/4	4	#2 PH

- Contains 3 Slotted, 2 Phillips Insulated Screwdrivers

Insulated Slotted

Insulated Phillips

Insulated Slotted / Phillips Screwdrivers

Stock No.	Overall Length (Inch)	Blade Length (Inch)	Tip Width/ Point Size
BAHBE-8010S	7	3	3/32
BAHBE-8220S	9	4	1/8
BAHBE-8040S	8 3/4	4	5/32
BAHBE-8050S	8 3/4	4	7/32
BAHBE-8230S	9 3/4	5	9/64
BAHBE-8255S	10 3/4	6	1/4
BAHBE-8065S	11 5/8	7	5/16
BAHBE-8600S	6 3/8	2 3/8	0 PH
BAHBE-8610S	8	3 5/32	1 PH
BAHBE-8620S	8 3/4	4	2 PH
BAHBE-8630S	10 3/4	6	3 PH
BAHBE-8640S	14 1/4	8	4 PH

- For protection against inadvertent show when working on circuits up to 1000 V
- Three component ergonomcially designed handle provides comfort and maximum grip even with oily hands

7 Piece Insulated Ratcheting Screwdriver Sets

A must have tool for electricians.

- The blade release system built in the comfortable handle makes it easy and safe to change the slim blades without the blades falling out.
- The blades are 30% slimmer than the blade of a regular insulated screwdriver for better accessibility and more applications such as sunken screws and spring elements.
- For working on live equipment up to 1000 volts.
- Complete with roll up pouch with clear 1000v indication
- IEC 60900 compliant
- Blades furnished in 2-packs

Stock No.	Style	Blade Tip Sizes Included
BAH808061	Phillips and Slotted Blades	PH1, PH2, 0.4X2.5, 0.5X3.0, 0.8X4.0, 1.0X 5.5,Handle
BAH808062	Pozidriv and Slotted Blades	PZ1, PZ2, 0.4X2.5, 0.5X3.0, 0.8 X 4.0, 1.0 X 5.5, Handle

Spare Blades & Handles:

Stock No.	Description
BAH808060	Spare Handle
BAH8610SL-2P	PH1
BAH8620SL-2P	PH2
BAH8810SL-2P	PZ1
BAH8820SL-2P	PZ2
BAH8010SL-2P	.4 x 2.5 mm
BAH8220SL-2P	.5 x 3.0 mm
BAH8040SL-2P	.8 x 4.0 mm
BAH8050SL-2P	1 x 5.5 mm
BAH8910SL-2P	T10
BAH8915SL-2P	T15
BAH8920SL-2P	T20
BAH8925SL-2P	T25
BAH8930SL-2P	T30
BAH8510SL-2P	Combi-tip PH1 / 5.0x100
BAH8520SL-2P	Combi-tip PH2 / 6.0x100
BAH8710SL-2P	Combi-tip PZ1 / 5.0x100
BAH8720SL-2P	Combi-tip PZ2 /6.0x100

BAH808061

1000V

The blade release system built in the comfortable handle makes it easy and safe to change the slim blades without the blades falling out. The blades are 30% slimmer than the blade of a regular insulated screwdriver for better accessibility and more applications (e.g. sunken screws and spring elements). a must have tool for electricians.

⚠ WARNING

INSULATED TOOLS

BAH2203V-8

BAH2213V-8

BAH2171V-180

BAH2191V-200

BAH2421V-160

BAH527V-160

BAH2430V-160

BAH2427V-200

BAH2678V-180

BAH2223V-150

BAH2521V-160

Bahco 3-Layer Insulated Pliers

- 3 layer coating insulation with different colors plus a 4th one in black to further protect handle edges. Red: safety. Orange: danger. Yellow: high danger
- Manufactured according to International IEC60900 standards for working with live systems up to 1000 V AC & 1500 V DC
- Each tool is tested to 10,000 V for a period of 10 seconds, thus guaranteeing safety during live work
- Conform to VDE0820 Standards

Bahco 1000V Cutting Pliers

Stock No.	Description	ISO/DIN Spec	Overall Length (in)	Jaw Length (in)	Maximum Cutting Capacity (in)
BAH2203V-5	Heavy Duty Straight Head Diagonal Cutting Pliers	-	5 1/4	9/16	1/16 Piano Wire
BAH2203V-8	Heavy Duty Straight Head Diagonal Cutting Pliers	-	8 3/16	13/16	3/32 Piano Wire
BAH2213V-8	Heavy Duty Angled Head Diagonal Cutting Pliers	-	8 1/16	13/16	3/32 Piano Wire
BAH2191V-200	Heavy Duty Side Cutting Pliers	5749	8	3/4	3/32 Piano Wire
BAH2171V-160	Standard Duty Side Cutting Pliers	5749	6 1/4	3/4	1/16 Hard and Soft Wire
BAH2171V-180	Standard Duty Side Cutting Pliers	5749	7	3/4	1/16 Hard and Soft Wire
BAH527V-160	End Cutting Pliers	5748	6 1/4	1/4	1/16 Hard and Soft Wire
BAH527V-200	End Cutting Pliers	5748	8	1/4	1/16 Hard and Soft Wire

Bahco 1000V Long Nose Pliers

Stock No.	Description	ISO/DIN Spec	Overall Length (in)	Jaw Length (in)	Maximum Cutting Capacity (in)
BAH2430V-160	Needle Nose Pliers with Side Cutter	5745	6 1/4	1 7/8	1/16 Hard and Soft Wire
BAH2430V-200	Needle Nose Pliers with Side Cutter	5745	8	2 7/8	1/16 Hard and Soft Wire
BAH2427V-200	60° Bent Tip Needle Nose Pliers with Side Cutter	5745	8	2 3/4	1/16 Hard and Soft Wire
BAH2521V-160	Round Nose Pliers	5745	6 1/4	1 21/32	NA
BAH2421V-160	Flat Nose Pliers	5745	6 1/4	1 7/8	NA

Bahco 1000V Miscellaneous Pliers

Stock No.	Description	ISO/DIN Spec	Overall Length (in)	Jaw Length (in)	Maximum Cutting Capacity (in)	Maximum Stripping Capacity (in)
BAH2678V-180	Side Cutting Combination Pliers	5746	7	1 1/16	1/16 Hard and Soft Wire	NA
BAH2223V-150	Wire Stripping Pliers	-	6 1/4	1 13/16	NA	3/16

BAH2101S

Insulated Diagonal Cutting Pliers

- Extra thick grip handles with thumb stop
- Edges near the joint are shaped for cutting hard materials such as thick single wires

Stock No.	Length (Inch)	Jaw Length (Inch)	Max Cutting Capacity (in)
BAH2101S-140	5 ½	5/8	1/16 Piano Wire
BAH2101S-160	6 ¼	3/4	1/16 Piano Wire
BAH2101S-180	7	13/16	5/64 Piano Wire
BAH2101S-200	8	7/8	3/32 Piano Wire

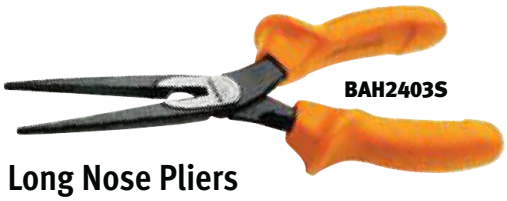
BAH2403S

Insulated Long Nose Pliers

- High performance tool steel construction adds extra strength

Stock No.	Style	Overall Length (Inch)	Max Cutting Capacity (in)
BAH2430S-200	Straight	8	1/16 Hard Steel
BAH2427S-200	Curved	8	5/64 Hard Steel

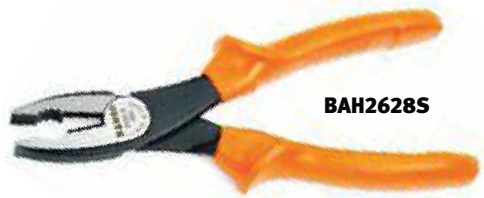
BAH2628S

Insulated Side Cutting Pliers

- High-leverage joint placement to reduce the cutting force
- Joint design ensures a smooth joint action

Stock No.	Length (Inch)	Jaw Length (Inch)	Max Cutting Capacity (in)
BAH2628S-180	7	1 1/16	5/64 Hard Steel
BAH2628S-200	8	1 ½	7/64 Hard Steel

BAH2520S

Insulated Cable Cutter

- Extra thick grip handles with thumb stop
- For cuts on ferrous material, only use cutting notch that is provided below top cutting blades in jaws

Stock No.	Length (Inch)	Jaw Length (Inch)
BAH2520S	23 5/8	1 3/16 Aluminum/Copper without Messenger Wire

⚠ WARNING

BAH2806-35V

1000V Ratchet Action Cable Cutter

1000V

- For protection against inadvertent shock when working on circuits up to 1000V.
- 3 layer coating insulation with different colors plus a 4th one in black to further protect handle edges. Red: safety. Orange: danger. Yellow: high danger
- One hand operation, easy release of the movable jaw
- For cutting copper and aluminum cables
- Not suitable for hard copper, steel cables, or internal steel wire cables
- Clean and smooth cut without distortion

Stock No.	Length (in)	Cutting Capacity (in)
BAH2806-35V	9	1 ½
BAH2806-52V	13	2


BAH2820VBC

1000V Bolt Cutter

1000V

- For protection against inadvertent shock when working on circuits up to 1000V.
- 3 layer coating insulation with different colors plus a 4th one in black to further protect handle edges. Red: safety. Orange: danger. Yellow: high danger
- Forged head; Induction hardened cutting edges
- Long arms with lever-action head, allows cutting of hard wires with very little effort.

Stock No.	Length (in)	Wire types Ø mm w		
		80kg/mm²	120kg/mm²	160kg/mm²
BAH2820VBC	25	9	8	7

BAH8071V

1000V Adjustable Wrenches

1000V

- For protection against inadvertent shock when working on circuits up to 1000V
- 3 layer coating insulation with different colors plus a 4th one in black to further protect handle edges. Red: safety. Orange: Caution. Yellow: danger
- Material: Chrome-Vanadium steel
- The moveable jaw slides easily by smoothly operating the thumb screw

Stock No.	Length (Inch)	Max Jaw Opening (Inch)	Head Thickness (in)
BAH8070V	6	3/4	7/16
BAH8071V	8	1 1/16	3/8
BAH8072V	10	1 3/16	5/8
BAH8073V	12	1 5/16	3/4
BAH8074V	15	1 3/4	1 5/16

Complies with ISO and ANSI torque requirements.
Head dimensions comply with ISO 6787 standards

SCREWDRIVERS

ERGO® Handle Interchangeable Blades

- Ergo handle with interchangeable blades
- Quick-Spin for easy fastening
- Lock-in system for easy and safe locking of blades
- 100 mm Hexagonal blades
- In a pouch or Foam inlay

Stock No.	Description
BAHBE-8571	7 Piece ERGO® Handle Interchangeable Blade Set

Contents Include:

PH1	PZ2	1.2×6.5 Slotted	Handle, Pouch
PH2	1×5.5 Slotted	1.2×6.5 Slotted	

Stock No.	Description
BAHBE-8572	9 Piece ERGO® Handle Interchangeable Blade Set

Contents Include:

PH1	PZ1	T10	1×5.5 Slotted	Handle, Pouch
PH2	PZ2	T15	1.2×6.5 Slotted	

Stock No.	Description
BAHBE-8573	8 Piece ERGO® Handle Interchangeable Blade Set

Contents Include:

T10	T20	T27	T40
T15	T25	T30	Handle, Pouch

Stock No.	Description
BAHBE-8576	22 Piece ERGO® Handle Interchangeable Blade Set

Contents Include:

PH1	PZ1	T10	T25	0.6×3.5 Slotted	1.2×6.5 Slotted
PH2	PZ3	T15	T30	0.8×4.0 Slotted	Bits (6 pcs): H2.5, H3, H4, H5, H6, H8
PH3	PZ3	T20	T40	1×5.5 Slotted	Handle, Foam Inlay

BAHBE-8572

BAHBE-8576

6 Piece XHD Phillips® Screwdriver Sets w/Hex Blades & Bolsters

- Metal striking cap at top of handle gives ultimate protection during jobs requiring high impact and added force
- Elastomer surface and double shaped handle for added comfort and maximum turning power
- Rudolite® plastic provides high impact resistance to the tool and a perfect joint between the handle and shank
- Black oxide tips prevent chipping of chrome to reduce possible contamination at work location

Bi-Mold Comfort Grip Handles

Stock No.	Description
BAH202,020	6 Piece XHD Slotted & Phillips® Screwdriver Sets w/Hex Blades & Bolsters

Contents Include:

Stock No.	Overall Length (in)	Blade Length (in)	Tip Width/Point Size
BAH038055100	8 ½	5	7/32
BAH038065125	10	6	¼
BAH038080150	11 ½	7	5/16
BAH039001100	8 ½	4	#1 Phillips®
BAH039002125	10	5	#2 Phillips®
BAH039003150	11 ½	6	#3 Phillips®

BAH202,020

XHD Slotted Screwdrivers w/Hex Blades & Bolsters

- Metal striking cap at top of handle gives ultimate protection during jobs requiring high impact and added force
- Thru-Blade shank continues through the handle before contacting the metal striking cap for ultimate strength
- Elastomer surface and double shaped handle for added comfort and maximum turning power
- Rudolite® plastic provides high impact resistance to the tool and a perfect joint between the handle and shank
- Black oxide tips prevent chipping of chrome to reduce possible contamination at work location

Premium Comfort Grip Handles and Blades

Stock No.	Overall Length (in)	Blade Length (in)	Tip Width (in)
BAH038055100	8 ½"	5	7/32
BAH038065125	10	6	¼
BAH038080150	11 ½"	7	5/16
BAH038100175	12 ½"	7	3/8
BAH038120200	13 ½"	8	½
BAH038140200	13 ½"	9	9/16

BAH038065125

XHD Phillips® Screwdrivers w/Hex Blades & Bolsters

- Metal striking cap at top of handle gives ultimate protection during jobs requiring high impact and added force
- Thru-Blade shank continues through the handle before contacting the metal striking cap for ultimate strength
- Elastomer surface and double shaped handle for added comfort and maximum turning power
- Rudolite® plastic provides high impact resistance to the tool and a perfect joint between the handle and shank
- Black oxide tips prevent chipping of chrome to reduce possible contamination at work location

Premium Comfort Grip Handles and Blades

Stock No.	Overall Length (in)	Blade Length (in)	Point Size
BAH039001100	8 ½	4	#1
BAH039002125	10	5	#2
BAH039003150	11 ½	6	#3
BAH039004200	13 ½	8	#4

** Dual grip handle for two-handed operation provides extra torque when necessary

BAH039002125

Thru-Blade shank continues through the handle before contacting the metal striking cap for ultimate strength

⚠ WARNING

PLIERS

BAHCO

Heavy Duty ERGO® Side Cutting Pliers

- Reinforced metal frame has been designed to withstand extreme conditions and hold up extra hard wires.
- Comfortable ergonomic two-component handles which combines durability and a secure non-slip grip.
- Extra wide handle two-component material reduces stress ans strain, and to increase comfort
- Lacquer finish protects against rust.

Stock No.	Overall Length (in)	Jaw Length (in)	Maximum Cutting Capacity (in)
BAH21HDG140	5 ½	5/8	5/64 Piano Wire
BAH21HDG160	6 ¼	3/4	3/32 Piano Wire
BAH21HDG180	7	13/16	1/8 Piano Wire
BAH21HDG200	7 ¾	13/16	1/8 Piano Wire

BAH21HDG-140

Heavy Duty ERGO® Angled Side Cutting Pliers

- Reinforced metal frame has been designed to withstand extreme conditions and hold up extra hard wires.
- Angled at 14 degree to enhance accessibility
- Perfect for Nail cutting
- Comfortable ergonomic two-component handles which combines durability and a secure non-slip grip.
- Extra wide handle two-component material reduces stress ans strain, and to increase comfort
- Lacquer finish protects against rust.

Stock No.	Overall Length (in)	Jaw Length (in)	Maximum Cutting Capacity (in)
BAH21HDG140A	5 ½	5/8	5/64 Piano Wire
BAH21HDG160A	6 ¼	3/4	3/32 Piano Wire
BAH21HDG180A	7	13/16	1/8 Piano Wire
BAH21HDG200A	7 ¾	13/16	1/8 Piano Wire

BAH21HDG140A

ERGO® Diagonal Cutting Pliers

- Comfortable ergonomic two-component handles which combines durability and a secure non-slip grip.
- Extra wide handle two-component material reduces stress and strain, and to increase comfort.
- Lacquer finish protects against rust.

Piano Wire Cutting and True Ergonomic Handles twith Bi-Molded Grips

Stock No.	Overall Length (in)	Jaw Length (in)	Maximum Cutting Capacity (in)
BAH2101G-125	4 7/8	9/16	1/16 Piano Wire
BAH2101G-140	5 ½	5/8	1/16 Piano Wire
BAH2101G-160	6 ¼	3/4	5/64 Piano Wire
BAH2101G-180	7	13/16	3/32 Piano Wire

BAH2101G

ERGO® Combination Adjustable/Pipe Wrenches

Stock No.	Overall Length (Inch)	Max Jaw Opening (Inch)	Head Thickness	Max Pipe Diameter
Chrome Finish:				
BAH9070RPCUS	6	13/16	7/16	3/8
BAH9071RPCUS	8	1 1/16	1/2	1/2
BAH9072RPCUS	10	1 5/16	5/8	5/8
BAH9073RPCUS	12	1 3/8	11/16	11/16
Black Phosphate Finish:				
BAH9070RPUS	6	13/16	7/16	3/8
BAH9071RPUS	8	1 1/16	1/2	1/2
BAH9072RPUS	10	1 5/16	5/8	5/8
BAH9073RPUS	12	1 3/8	11/16	1 1/16

- Unique reversible jaw combines the functins of an adjustable and pipe wrench
- Simply reverse the jaw to change the grip
- True ERGO® design, with thermoplastic handle and larger grip width.
- Ideal for plumbers, electricians and maintenance workers.

Mini Bolt Cutter

- Access tough to reach work.
- Bi-mold comfort grips combine durability and a secure non-slip grip.
- Cuts nails and bolts up to ¼ diameter.

Bi-Mold Comfort Grip Handles

Stock No.	Overall Length (in)
BAH1520G	8

BAH1520G

Bolt Cutters

- Comfortable rubber grips combine durability and a secure non-slip grip.
- Lightweight steel tube handles provide ease of control while offering solid durability.
- Unique manufacturing method results in high-precision cutting edges.

Comfort Grip Handles

Stock No.	Overall Length	Maximum Cutting Capacity For Rebar (Inch)	Replacement Jaw Kit (Includes Jaws, Bolts, and Steel Plates)
BAH4559-12	12	¼	4559-12B JC
BAH4559-18	18	⅝	4559-18B JC
BAH4559-24	24	⅜	4559-24B JC
BAH4559-30	30	½	4559-30B JC
BAH4559-36	36	⅝	4559-36B JC
BAH4559-42	42	⅝	4559-42B JC

BAH4559

Cable Cutter for Ferrous Materials

- Lightweight handles provide ease of control while offering solid durability.
- Rubber grips offer control and comfort during working application.
- Cutting notch below top cutting blades provided for cuts on ferrous material.
- Replacement blade kit includes blades, screws, and nuts.

With Rubber Grips

Stock No.	Overall Length (in)	Cable Cutting Capacity (in)	Replacement Blade Kit
BAH2520	22 1/2	1 3/16 Aluminum/Copper with 1/4 Messenger Wire	2520-SH

BAH2520

Cable Cutter for Non-Ferrous Materials

- For non-ferrous material cutting only.
- Lightweight handles provide ease of control while offering solid durability.
- Rubber grips offer control and comfort during working application.
- Replacement blade kit includes blades, screws, and nuts.

With Rubber Grips

Stock No.	Overall Length (in)	Cable Cutting Capacity (in)
BAH2620-80	31 ½	1 ⅝ Aluminum/Copper

BAH2620-80

⚠ WARNING

HOLESAW SETS

Bimetal Holesaw Sets and Contents

Description	Stock No.	BAH862007 7 Pieces	BAH862013 13 Pieces	BAH862017 17 Pieces	BAH862021 21 Pieces	BAH862209 9 Pieces	BAH862109 9 Pieces
Bimetal Holesaw 5/8"	**BAH383016VIP**			X			
Bimetal Holesaw 3/4"	**BAH383019VIP**		X	X	X	X	
Bimetal Holesaw 7/8"	**BAH383022VIP**	X	X	X	X	X	X
Bimetal Holesaw 1"	**BAH383025VIP**	X		X	X		
Bimetal Holesaw 1-1/8"	**BAH383029VIP**	X	X	X	X	X	X
Bimetal Holesaw 1-1/4"	**BAH383032VIP**	X		X			
Bimetal Holesaw 1-3/8"	**BAH383035VIP**		X	X	X		X
Bimetal Holesaw 1-1/2"	**BAH383038VIP**	X	X	X	X	X	
Bimetal Holesaw 1-3/4"	**BAH383044VIP**		X	X	X	X	X
Bimetal Holesaw 2"	**BAH383051VIP**		X	X	X		X
Bimetal Holesaw 2-1/4"	**BAH383057VIP**		X		X	X	
Bimetal Holesaw 2-1/2"	**BAH383064VIP**		X	X	X		X
Bimetal Holesaw 3"	**BAH383076VIP**			X	X		
Bimetal Holesaw 3-1/4"	**BAH383083VIP**				X		
Bimetal Holesaw 3-5/8"	**BAH383092VIP**				X		
Bimetal Holesaw 3-3/4"	**BAH383095VIP**				X		
Bimetal Holesaw 4-1/8"	**BAH3830105VI**				X		
Bimetal Holesaw 4-3/4"	**BAH3830121VI**				X		
Accessories Included (Available Individually)							
Arbor 7/16" Hex	**BAH38341130**				X		
Arbor 9/32 Hex	**BAH3834730**	X	X	X		X	X
Arbor 7/16 Hex 32152Mm Quick	**BAHC381152QC**		X	X	X	X	X
Arbor Adapter	**BAH3834-ADP**	X	X	X			
Holesaw Drill Hss 1/4"	**BAH3834DRL**		X	X (3 included)	X (3 included)		
Extension	**BAH3834EXT1**					X	X

- Assortment of holesaws and accessories most commonly used by the trades, especially electricians and plumbers.
- Each packed in a durable plastic carrying case for convenience.
- All Bahco holesaws feature verticle slots for easy core removal.

BAH862021

BAH862209

BAH862213

Carbide Holesaw Sets and Contents

Description	Stock No.	BAH863307 7 Pieces	BAH863313 13 Pieces
Carbide Holesaw 3/4"	**BAH3832-19**		X
Carbide Holesaw 7/8"	**BAH3832-22**	X	X
Carbide Holesaw 1"	**BAH3832-25**	X	
Carbide Holesaw 1-1/8"	**BAH3832-29**	X	X
Carbide Holesaw 1-1/4"	**BAH3832-32**	X	
Carbide Holesaw 1-3/8"	**BAH3832-35**		X
Carbide Holesaw 1-1/2"	**BAH3832-38**	X	X
Carbide Holesaw 1-3/4"	**BAH3832-44**		X
Carbide Holesaw 2"	**BAH3832-51**		X
Carbide Holesaw 2-1/4"	**BAH3832-57**		X
Carbide Holesaw 2-1/2"	**BAH3832-64**		X
Accessories Included (Available Individually)			
Arbor 9/32 Hex	**BAH3834730**	X	X
Arbor 7/16 Hex 32152Mm Quick	**BAH38341152QC**		X
Arbor Adapter	**BAH3834-ADP**	X	X
Holesaw Drill Hss 1/4"	**BAH3834DRL**		X

- For the professional who works with a wide variety of non-metallic surfaces, this set will cut throug anything from hardwood to bricks.

BAH863313

Bimetal and Carbide Tipped Holesaws

Bimetal Stock No.	Carbide Stock No.	Diameter (in)	Diameter (mm)
BAH383014VIP	BAH3832-14	9/16	14
BAH383016VIP	BAH3832-16	5/8	16
BAH383017VIP	BAH3832-17	11/16	17
BAH383019VIP	BAH3832-19	3/4	19
BAH383020VIP	BAH3832-20	25/32	20
BAH383021VIP	BAH3832-21	13/16	21
BAH383022VIP	BAH3832-22	7/8	22
BAH383024VIP	BAH3832-24	15/16	24
BAH383025VIP	BAH3832-25	1	25
BAH383027VIP	BAH3832-27	1 1/16	27
BAH383029VIP	BAH3832-29	1 1/8	29
BAH383030VIP	BAH3832-30	1 3/16	30
BAH383032VIP	BAH3832-32	1 1/4	32
BAH383033VIP	BAH3832-33	1 5/16	33
BAH383035VIP	BAH3832-35	1 3/8	35
BAH383037VIP	BAH3832-37	1 7/16	37
BAH383038VIP	BAH3832-38	1 1/2	38
BAH383040VIP	BAH3832-40	1 9/16	40
BAH383041VIP	BAH3832-41	1 5/8	41
BAH383043VIP	BAH3832-43	1 11/16	43
BAH383044VIP	BAH3832-44	1 3/4	44
BAH383046VIP	BAH3832-46	1 13/16	46
BAH383048VIP	BAH3832-48	1 7/8	48
BAH383051VIP	BAH3832-51	2	51
BAH383052VIP	BAH3832-52	2 1/16	52
BAH383054VIP	BAH3832-54	2 1/8	54
BAH383056VIP	BAH3832-56	2 7/32	56
BAH383057VIP	BAH3832-57	2 1/4	57
BAH383059VIP	BAH3832-59	2 5/16	59
BAH383060VIP	BAH3832-60	2 3/8	60
BAH383064VIP	BAH3832-64	2 1/2	64
BAH383065VIP	BAH3832-65	2 9/16	65
BAH383067VIP	BAH3832-67	2 5/8	67
BAH383068VIP	BAH3832-68	2 11/16	68
BAH383070VIP	BAH3832-70	2 3/4	70
BAH383073VIP	BAH3832-73	2 7/8	73
BAH383076VIP	BAH3832-76	3	76
BAH383079VIP	BAH3832-79	3 1/8	79
BAH383083VIP	BAH3832-83	3 1/4	83
BAH383086VIP	BAH3832-86	3 3/8	86
BAH383089VIP	BAH3832-89	3 1/2	89
BAH383092VIP	BAH3832-92	3 5/8	92
BAH383095VIP	BAH3832-95	3 3/4	95
BAH383098VIP	BAH3832-98	3 7/8	98
BAH3830102VI	BAH3832-102	4	102
BAH3830105VI	BAH3832-105	4 1/8	105
BAH3830108VI	BAH3832-108	4 1/4	108
BAH3830111VI	BAH3832-111	4 3/8	111
BAH3830114VI	BAH3832-114	4 1/2	114
BAH3830121VI	BAH3832-121	4 3/4	121
BAH3830127VI	BAH3832-127	5	127
BAH3830133VI	BAH3832-133	5 1/4	133
BAH3830140VI	BAH3832-140	5 1/2	140
BAH3830146VI	BAH3832-146	5 3/4	146
BAH3830152VI	BAH3832-152	6	152

Bimetal Holesaw

Carbide Tipped Holesaw

- Every aspect of the BAHCO holeaw is engineered to improve a worker's productivity and craftsmanship from the design of the cutting edges to the technologies used to produce the holesaws.BAHCO holesaws fit all standard portable drills and drill presses.
- Bahco was the first to create a successful bi-metal blade that combines a flexible, shatter-resistant spring steel back with a high speed steel cutting edge to provide faster, more durable cutting power.
- **Carbide tipped holesaws** cut clean holes in ceramics, bricks, slate, laminate, fiberglass and hardwood. Carbide tips are fusion welded to an alloy back. Cutting depth for all diameters is 1-1-/2".
- **Bimetal holesaws** create clean, accurate holes in most machinable materials. High speed cutting edge is electron beam welded to tough alloy back. Cutting depth for all diamters is 1-1/2".

⚠ WARNING

RECIPROCATING SAW BLADES

Bi-Metal Reciprocating Saw Blades

Stock No.	Blade Length (in)	Blade Length (mm)	Blade Thickness (in)	Blade Thickness (mm)	Teeth per inch
5 Per Pack					
BAH31006ST5P	4	100	0.050	1.3	6
BAH310010ST5	4	100	0.035	0.9	10
BAH310014ST5	4	100	0.035	0.9	14
BAH310018ST5	4	100	0.035	0.9	18
BAH310024ST5	4	100	0.035	0.9	24
BAH31506ST5P	6	150	0.050	1.3	6
BAH3150812T5	6	150	0.035	0.9	8/12
BAH315010ST5	6	150	0.035	0.9	10
BAH315014ST5	6	150	0.035	0.9	14
BAH315018ST5	6	150	0.035	0.9	18
BAH315024ST5	6	150	0.035	0.9	24
BAH3228812T5	9	228	0.050	1.3	8/12
BAH322810ST5	9	228	0.035	0.9	10
BAH322814ST5	9	228	0.035	0.9	14
BAH322818ST5	9	228	0.035	0.9	18
BAH330014ST5	12	300	0.035	0.9	14
BAH330018ST5	12	300	0.035	0.9	18
10 Per Pack					
BAH310ST10P	4	100	0.050	1.3	6
BAH310010ST1	4	100	0.035	0.9	10
BAH310014ST1	4	100	0.035	0.9	14
BAH310018ST1	4	100	0.035	0.9	18
BAH310024ST1	4	100	0.035	0.9	24
BAH31506ST10	6	150	0.050	1.3	6
BAH3150812T1	6	150	0.035	0.9	8/12
BAH315010ST1	6	150	0.035	0.9	10
BAH315014ST1	6	150	0.035	0.9	14
BAH315018ST1	6	150	0.035	0.9	18
BAH315024ST1	6	150	0.035	0.9	24
BAH3228812T1	9	228	0.050	1.3	8/12
BAH322810ST1	9	228	0.035	0.9	10
BAH322814ST1	9	228	0.035	0.9	14
BAH322818ST1	9	228	0.035	0.9	18
BAH330014ST1	12	300	0.035	0.9	14
BAH330018ST1	12	300	0.035	0.9	18
100 Per Pack					
BAH3150812ST	6	150	0.035	0.9	8/12
BAH315010ST	6	150	0.035	0.9	10
BAH315014ST	6	150	0.035	0.9	14
BAH315018ST	6	150	0.035	0.9	18
BAH315024ST	6	150	0.035	0.9	24
BAH3228812T	9	228	0.050	1.3	8/12
BAH322810ST	9	228	0.035	0.9	10
BAH322814ST	9	228	0.035	0.9	14
BAH322818ST	9	228	0.035	0.9	18
BAH330014ST	12	300	0.035	0.9	14
BAH330018ST	12	300	0.035	0.9	18

- For Straight and quick cutting of metal, plastic, laminates and wood with nails.

- Extra Heavy duty coarse-toothed bi-metal blade with coarse teeth for cutting metal tubing and other demanding metal work. U-shaped fitting provides extra strength when secured to reciprocating saw.

Bi-Metal Reciprocating Saw Blades

Stock No.	Blade Length (in)	Blade Length (mm)	Blade Thickness (in)	Blade Thickness (mm)	Teeth per inch
Slope Blade 5 Per Pack					
BAH315058SL5	6	150	0.050	1.3	5/8
BAH32286SL5	9	228	0.050	1.3	6
BAH33006SL5	12	300	0.050	1.3	6
BAH3300812S5	12	300	0.050	1.3	8/12
Slope Blade 10 Per Pack					
BAH315058SL1	6	150	0.050	1.3	5/8
BAH32286SL1	9	228	0.050	1.3	6
BAH33006SL1	12	300	0.050	1.3	6
BAH3300812S1	12	300	0.050	1.3	8/12
Slope Blade 100 Per Pack					
BAH315058SL	6	150	0.050	1.3	5/8
Contour Blade 5 Per Pack					
BAH310010SC5	4	100	0.035	0.9	10
BAH310014SC5	4	100	0.035	0.9	14
BAH310018SC5	4	100	0.035	0.9	18
BAH315046SC5	6	150	0.050	1.3	4/6
Contour Blade 10 Per Pack					
BAH315046SC1	6	150	0.050	1.3	4/6
Demolition Blade 5 Per Pack					
BAH315058DS5	6	150	0.062	1.6	5/8
BAH322858DS5	9	228	0.062	1.6	5/8
BAH330058DS5	12	300	0.062	1.6	5/8
Demolition Blade 10 Per Pack					
BAH315058DS1	6	150	0.062	1.6	5/8
BAH322858DS1	9	228	0.062	1.6	5/8
BAH330058DS1	12	300	0.062	1.6	5/8
Heavy Duty Blade 5 Per Pack					
BAH31508UST5	6	150	0.062	1.6	8
BAH32008UST5	8	200	0.062	1.6	8
BAH33008UST5	12	300	0.062	1.6	8

- Slope blade - for all around cutting of metal plastics, laminates and wood in nails.

- Contour blade - for contour sawing of metal, plastic, laminates and wood with nails.

- Demolition Blades with coarse teeth for buidling and demolition work. Blade thickness is increased to .062" for greater strength, making this blade ideal for cutting any building material, even heavy wood with large-dimension nails.

Specialty Reciprocating Saw Blades

Stock No.	Blade Length (in)	Blade Length (mm)	Blade Thickness (in)	Blade Thickness (mm)	Teeth per inch
Low Friction 5 Per Pack					
BAH421507SL5	6	150	0.040	1.0	7
BAH422287SL5	9	228	0.040	1.0	7
BAH423007SL5	12	300	0.040	1.0	7
Low Friction 10 Per Pack					
BAH421507SL1	6	150	0.040	1.0	7
BAH422287SL1	9	228	0.040	1.0	7
BAH423007SL1	12	300	0.040	1.0	7
Carbide Tipped 1 Per Pack					
BAH461506SL1	6	150	0.035	0.9	6
BAH462283STP	9	228	0.050	1.3	3
BAH463003STP	12	300	0.050	1.3	3
Carbide Grit 2 Per Pack					
BAH46100GST2	4	100	0.035	0.9	
BAH46150GST2	6	150	0.035	0.9	
Pallet Cutting 10 Per Pack					
BAH228101431	9	228	0.05	1.3	10/14
BAH228101491	9	228	0.035	0.9	10/14
Pallet Cutting 100 Per Pack					
BAH22810143	9	228	0.05	1.3	10/14
BAH22810149	9	228	0.035	0.9	10/14
10 Piece Recip Blade Set					
BAHREC-SET10	**Includes 1 EA:**				
BAH31006ST	**BAH310010SC**				
BAH310018SC	**BAH310024ST**				
BAH315058SL	**BAH315010ST**				
BAH315014ST	**BAH315018ST**				
BAH315024ST	**BAH31507SL**				

- Low Friction Wood Cutting Blade for all around wood cutting

- Carbide tipped blades for cutting bricks, porous concrete, fiberglass, plastic laminates, cement board, plywood, cast aluminum, rubber and hardwoods

- Carbide grit blades for precision cutting of extremely hard metals, glass, glazed tiles, ceramics, fiberglass, cast iron, clay pipe, stone, bricks, plaster and marble.

- Pallet blade designed for pallet repair shops. Unique V-shape front design prevents the blade from jamming in the wood when cutting nails in damaged parts of the pallet.

- Set contains 10 of the most commonly used recip blades.

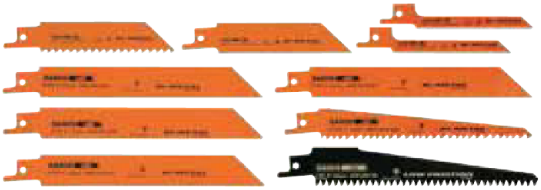

⚠ WARNING

Bahco Bits

Stock No.	Size (in)
Spade Bits - Length: ¼" to 1" = 6 1⁄16"	
BAH95291/4	¼
BAH95293/8	⅜
BAH95297/16	7⁄16
BAH95291/2	½
BAH95299/16	9⁄16
BAH95295/8	⅝
BAH952911/16	11⁄16
BAH95293/4	¾
Spade Bits - Length: 1 ⅛" to 1 ½" = 6 ¾"	
BAH952913/16	13⁄16
BAH95297/8	⅞
BAH952915/16	15⁄16
BAH95291	1
BAH952911/8	1 ⅛
BAH952911/4	1 ¼
BAH952913/8	1 ⅜
BAH952911/2	1 ½
Auger Bits - Short - Approximately 8 inches	
BAH95263/8	⅜
BAH95267/16	7⁄16
BAH95261/2	½
BAH95269/16	9⁄16
BAH95265/8	⅝
BAH952611/16	11⁄16
BAH95263/4	¾
BAH952613/16	13⁄16
BAH95267/8	⅞
BAH952615/16	15⁄16
BAH95261	1
BAH952611/8	1 ⅛
BAH952611/4	1 ¼
BAH952613/8	1 ⅜
BAH952611/2	1 ½
Auger Bits - Long - Approximately 16 inches	
BAH95273/8	⅜
BAH95277/16	7⁄16
BAH95271/2	½
BAH95279/16	9⁄16
BAH95275/8	⅝
BAH952711/16	11⁄16
BAH95273/4	¾
BAH952713/16	13⁄16
BAH95277/8	⅞
BAH952715/16	15⁄16
BAH95271	1
BAH952711/8	1 ⅛
BAH952711/4	1 ¼
BAH952713/8	1 ⅜
BAH952711/2	1 ½

- Spade Bits for fast wood boring.

- Auger Bits - tip is self-tapping which makes drilling easier.

SCRAPERS AND CHISELS

BAH4741250

Cabinet Scrapers

- Blade of cold-rolled, hardened and tempered chrome-nickel steel.
- White plastic edge protector.

For Carpentry Work

Stock No.	Length (Inch)
BAH4741250.6	5
BAH4741250.8	5
BAH4741500.6	6

ERGO® Chisels

- Two component ergonomic grip handle
- Splitproof handle allows repeated hammer blows
- Safety guard and rounded shoulders for added security
- Precision ground blade for maximum sharpness
- Hardened and tempered for long lasting performance
- Honed and ready to use
- Polished blade for rust resistance
- Protective holster included

High-Quality Steel

Stock No.	Overall Length (Inch)	Blade Length (Inch)	Tip Width (Inch)
BAH434-6	10 ¾	5 ½	¼
BAH434-10	10 ¾	5 ½	⅜
BAH434-12	10 ¾	5 ½	½
BAH434-18	10 ¾	5 ½	¾
BAH434-25	10 ¾	5 ½	1
BAH434-28	10 ¾	5 ½	1 ¼
BAH434-38	10 ¾	5 ½	1 ½

Set Includes:

Stock No.	Description
BAH434S3EUR	Chisels: ½, ¾, 1 in a Cardboard Box
BAH434S6EUR	Chisels: ¼, ⅜, ½, ¾, 1, 1¼ in a Wooden Box

BAH425-18

BAH425-083

Wood Chisels

- Chisels feature high-quality tool steel with tapered neck.
- Hardened over a potion of the length, starting from the cutting edge, and coated with a transparent lacquer for rust protection.
- Chisels have a full bevel pattern, which means the sides of the blades have been beveled down to approximately half the blade thickness.
- Handle of red-beech wood, which nickel-plated steel ferrule to prevent it from splitting when struck. Can normally withstand force from club or hammer blows, not including steel hammers.

High-Quality Steel

Stock No.	Overall Length (Inch)	Blade Length (Inch)	Tip Width (Inch)
BAH425-6	10 ¾	5 ½	¼
BAH425-10	10 ¾	5 ½	⅜
BAH425-12	10 ¾	5 ½	½
BAH425-18	10 ¾	5 ½	¾
BAH425-25	10 ¾	5 ½	1
BAH425-32	10 ¾	5 ½	1 ¼
BAH425-38	10 ¾	5 ½	1 ½

Set Includes:

Stock No.	Description
BAH425-083	Chisels: ¼, ⅜, ½, ¾, 1, 1 ¼ in a Wooden Box

BAH434-S6-EUR

BAH434-6

Holster

BAH434S3EUR

BAH434S6EUR

Sports Knives

- Sports knives have an aluminum handle
- Stainless steel blade and mechanism
- Blade locks in position when fully unfolded
- Unlock button to avoid accidental folding

Stock No.	Description
BAHKBTU-01	Knife with Twin Blade - Utility & Sports Blade
BAHKBSK-01	Knife with 3 Inch Sport Blade-Only

BAHKBTU-01

BAHKBSK-01

Laplander Folding Saw

- A general purpose folding saw for cutting both green and dry wood, plastic, bone etc.
- Specially designed for wild-life enthusiasts, hunting and campers.
- XT toothing, 7TPI. Blade specially coated for rust protection and low friction.
- Two-component plastic handle for perfect grip, with leather strap.
- Safety lock, locked also when folded.

General Purpose Folding Saw

Stock No.	Blade Length (Inch)	Teeth Per Inch
BAH396-LAP	8	7

Stock No.	Description
BAHLAP-KNIFE	Folding saw & Multipurpose Knife

BAH396-LAP

Multi Tool

- Loaded with the most versatile features, this multi tool is ready for work.
- Complete with a holder with a loop to fit any belt.
- Tools include knife, screwdriver, file, saw, can opener, bottle opener, cutting pliers and more.

Compact multipurpose tool

Stock No.	Tools Included
BAHMTT151	18

BAHMTT151

BAHLAP-KNIFE

Carpenter's Multi-Purpose Knife with Holster

- Multi purpose knife with high quality steel and bi-component handle.
- Polished stainless steel blade.
- Two component handle for comfortable grip.
- Knife comes in plastic case with belt clip.
- Ideal for fishermen, hunters and for working in the garden.

With Holster

Stock No.	Description	Length (in)
BAH2444	Carpenter's Multi-Purpose Knife with Holster	9

BAH2444

Wrecking Knife

- The wrecking chisel knife has been designed to be used like a regular chisel or when turned sideways a 4in wide knife.
- The blade is 4mm thick and made from hardened steel and can be used like a 4in chisel with a hammer on the back of the blade for added force.
- The handle has a curved guard to protect the knuckles while in use and can also be used with a hammer.
- The wrecking knife comes in handy for all those woodworking tasks.
- The knife comes complete with a holster with button clip.

With Holster

Stock No.	Description	Length (in)
BAH2448	Wrecking Knife	9

BAH2448

⚠ WARNING

PRECISION TOOLS

STARRETT: S766AZ
SNAP-ON: LST12206

S766AZ Series Basic Electronic Tool Set

Basic Electronic Tool Set

- Basic starter set with Electronic Caliper & Micrometer
- Furnished in attractive, protective case

Electronic Outside Micrometer: Cat. No. 3732XFL-1

- 0-1"/0-25 mm

Electronic Slide Caliper: Cat. No. 799A-6/150

- 0-6"/0-150 mm

Stock No.	Description
LST12206	Basic Electronic Tool Set w/out Output (inch/metric)

STARRETT: 3732XFL-1
SNAP-ON: LST12268

3732 Series Electronic Micrometers

- Extremely hard and stable one-piece spindle
- Micro-lapped carbide measuring faces
- Instant inch/millimeter conversion
- Measurement HOLD button
- Ability to zero tool at any position

Stock No.	Range	Resolution	Accuracy +/-
LST12268	0-1" / 0-25mm	.00005"/.001mm	.0001"/.002mm
LST12269	1-2" / 25-50mm	.00005"/.001mm	.0001"/.003mm
LST12270	2-3" / 50-75mm	.00005"/.001mm	.0001"/.003mm
LST12271	3-4" / 75-100mm	.00005"/.001mm	.00015"/.004mm
LST12272	4-5" / 100-125mm	.0001"/.001mm	.00015"/.004mm
LST12273	5-6" / 125-150mm	.0001"/.001mm	.00015"/.004mm

STARRETT: 486
SNAP-ON: LST52499

486 Series Blade Type Micrometers with non-rotating spindle

Designed for fast and accurate measurements of circular form tools, diameter and depth of narrow grooves, slots, keyways, recesses, and depths between lands and fins.

- Non-rotating spindle
- .030" (0.8mm) thick blade
- Blades will measure to 5/16" (8mm) depths

Stock No.	Range	Graduation	Description
LST52499	0-1 "	—	—
LST52501	1-2 "	—	—
LST52503	2-3 "	.001"	With Speeder
LST52505	3-4 "	—	—
LST52507	4-5 "	—	—
LST52509	5-6 "	—	—

STARRETT: S909Z
SNAP-ON: LST65122

S909Z Basic Precision Measuring Tool Set

- Inch Set
- Furnished in attractive, protective case
- Contains three of the most commonly used precision tools

Stock No.	Description
LST65122	**Set includes:**
	T436.2XRL-1 1" Outside Micrometer with Carbide Faces
	120A-6 6" Dial Caliper
	C604R-6 6" Spring Tempered Precision Rule

STARRETT: 210AP
SNAP-ON: LST50731

210AP Screw Thread Comparator Micrometer - Pointed Anvils

This micrometer is ideal for quick comparisons of thread accuracy in screw cutting operations, measuring in small grooves or recesses where regular micrometers cannot be used, and for many other applications.

Stock No.	Range	Graduation
LST50731	⅞"	.001"

NOTE: Does not measure pitch diameter.

STARRETT: 230
SNAP-ON: LST50947

230 Series Outside Micrometers

- Lock nut
- Carbide measuring faces
- Range: 0-1"
- Graduation: .0001"
- Full satin chrome finished tapered frame
- One-piece extra hard, stable spindle
- Micro-lapped carbide anvil & spindle faces

Stock No.	Description
LST50947	With friction thimble
LST50944	With ratchet stop

Contact your Snap-on Industrial Representative for more information, or call our Customer Service Center at (877) 740-1900

STARRETT: 436
SNAP-ON: LST67996

436 Series Outside Micrometers

Range: 0-6"

- Lock Nut
- Micro-lapped finish on anvil andspindle faces
- Quick reading figures on thimble with every thousandth numbered

Stock No.	Range	Graduation	Description
LST67996	0-1"	.001"	Friction Thimble, Lock Nut
LST67793	0-1"	.001"	Ratchet Stop, Lock Nut
LST67994	0-1"	.001"	Ratchet Stop, Lock Nut, Carbide Faces
LST67999	0-1"	.0001"	Friction Thimble, Lock Nut, Carbide Faces
LST67997	0-1"	.0001"	Ratchet Stop, Lock Nut, Carbide Faces
LST68002	1-2"	.001"	Ratchet Stop, Lock Nut
LST68003	1-2"	.001"	Ratchet Stop, Lock Nut, Carbide Faces
LST68007	1-2"	.0001"	Friction Thimble, Lock Nut, Carbide Faces
LST68005	1-2"	.0001"	Ratchet Stop, Lock Nut, Carbide Faces
LST68010	2-3"	.001"	Ratchet Stop, Lock Nut
LST68011	2-3"	.001"	Ratchet Stop, Lock Nut, Carbide Faces
LST68013	2-3"	.0001"	Ratchet Stop, Lock Nut, Carbide Faces
LST68019	3-4"	.0001"	Ratchet Stop, Lock Nut, Carbide Faces
LST68025	4-5"	.0001"	Ratchet Stop, Lock Nut, Carbide Faces
LST68031	5-6"	.0001"	Ratchet Stop, Lock Nut, Carbide Faces

124 Series Solid-Rod Inside Micrometers

- Range: 2-12"
- Graduation: .001"
- Screw Movement: 1/2"
- Hardened & ground anvils on heads & rods
- Furnished in case

Stock No.	Range	No. of Meas. Rods
LST50542	2-8"	6
LST50546	2-12"	10

STARRETT: 124
SNAP-ON: LST50542

Dial Calipers

- Hardened stainless steel construction
- Range: 0-6" (0-150 mm)
- Furnished in fitted plastic case

STARRETT: 120
SNAP-ON: LST64514

	Stock No.	Range	Graduation	Dial Color
120 Series	LST64514	0-6"	.001"	White
	LST64515	0-6"	.001"	Black
	LST64520*	0-9"	.001"	White
	LST56693*	0-12"	.001"	White
	LST66295	0-150 mm	0.02 mm	Yellow

*In finished wood case

- Dial graduations of .001" with .100" per revolution
- Black graduations on the satin finished bar, every. 100"
- Knife-edge contacts
- Thumb-operated fine adjustment roll
- Adjustable bezel
- Lock screws for sliding jaw and dial bezel
- Covered rack depth rod (not on LST56693)
- Hardened stainless steel bar, measuring surfaces
- No. 1202F-6 shows measurements as fractions on yellow outer scale in 1/64" inch graduations

STARRETT: 1202
SNAP-ON: LST68814

	Stock No.	Range	Description
1202 Series	LST68814	0-4"	Caliper in fitted case
	LST61467	0-6"	Caliper in fitted case
	LST61468	0-8"	Caliper in fitted case
	LST61466	0-12"	Caliper in fitted case
	LST68931	0-6"	Fractional Caliper in fitted case

⚠ WARNING

S436 Series Micrometer Sets with Standards in Case

- Lock nut
- Flat type cases for 0-3" set
- Carbide measuring faces
- Box type cases for 0-6" sets

STARRETT: S436
SNAP-ON: LST68038

Stock No.	Range	Graduation	Description	Set Includes
LST68038	0-3"	.0001"	Friction Thimble	1", 2" & 3" Mics.
LST68037	0-3"	.0001"	Ratched Stop	1", 2" & 3" Mics. w/ Two Standards
LST68045	0-6"	.001"	Ratched Stop	1", 2", 3", 4", 5" & 6" Mics.,w/ Five Standards
LST68044	0-6"	.001"	Ratched Stop	1", 2", 3", 4", 5" & 6" Mics.,w/ Five Standards

Electronic Calipers

- Large easy-to read LCD, 32" high
- Inch/mm conversion reads .0005" or 0.01mm
- Zero at any position
- Automatic shut-off after 5 minutes of nonuse
- Last measuring position retained when shut off
- Integrated depth rod on all sizes
- Fine adjustment thumb wheel
- Lock screw to hold the slide in position
- Linear accuracy meets DIN862

STARRETT: 799
SNAP-ON: LST00142

	Stock No.	Range	Graduation	Description
799 Series	LST00142	0-6"	.001"	Electronic Caliper in Fitted Case
	LST00145	0-8"	.001"	Electronic Caliper in Fitted Case
	LST00148	0-12"	.001"	Electronic Caliper in Fitted Case

- Large, easy to read LCD, .310" character height
- IP67 level of protection against coolant, water, dirt and dust
- Data Output
- Heavy-duty bar and slide, 3.5mm thick
- Hardened stainless steel measuring surfaces for long life
- Fine adjustment and slide lock
- CR2032 3V battery (>1 year battery life under normal use)
- In/mm conversion reads .0005" or 0.01mm
- Zero at any position
- Automatic shutoff after 30 minutes
- Linear accuracy meets DIN862

STARRETT: 798
SNAP-ON: LST68659

	Stock No.	Range	Approx. Jaw Depth, Outside	Approx. Jaw Depth, Inside	Description
798 Series	LST68659	0-6" (150 mm)	1 1/2" (38 mm)	5/8" (16 mm)	Caliper with output in fitted plastic case
	LST12523	0-8" (200 mm)	1 7/8" (47.6 mm)	3/4" (19 mm)	Caliper with output in fitted plastic case
	LST12525	0-12" (300 mm)	2 1/2" (63.5 mm)	3/4" (19 mm)	Caliper with output in fitted plastic case
	LST20798	0-6" (150 mm)	1 1/2" (38 mm)	5/8" (16 mm)	Caliper w/out output in fitted plastic case
	LST20799	0-8" (200 mm)	1 7/8" (47.6 mm)	3/4" (19 mm)	Caliper w/out output in fitted plastic case
	LST20800	0-12" (300 mm)	2 1/2" (63.5 mm)	3/4" (19 mm)	Caliper w/out output in fitted plastic case

125MEA Series Vernier Calipers

- English and metric measurement
- Lock screw for sliding jaw
- Hardened stainless steel depth rod
- Graduations: .002" English, 0.020 mm metric
- Sharp, black graduations on the satin finished bar

STARRETT: 125MEA
SNAP-ON: LST61660



Stock No.	Range	Description
LST61660	0-6" (150 mm)	Metric / English Vernier Caliper
LST61882	0-8" (200 mm)	Metric / English Vernier Caliper
LST61886	0-12" (300 mm)	Metric / English Vernier Caliper

PRECISION TOOLS

Starrett

823 Series Tubular Micrometer Sets

- Range: 1 ½-24"
- Hardened & ground anvils
- ⅜" Rods centerless ground with thermal insulation
- Furnished in attractive, protective case
- Graduation: .001"

STARRETT: 823
SNAP-ON: LST53050

Stock No.	Range	Movement of Screw	Description
LST53050	1 ½" – 8"	½"	With 5 rods and handle
LST53052	1 ½" – 12"	½"	With 8 rods and handle
LST53054	4" – 24"	1"	With 7 rods

Starrett 3089 Series Dial Bore Gages

STARRETT: 3089
SNAP-ON: LST2456

- Ergonomic design with non-slip insulating grip
- Carbide contacts for extended wear
- 2-point contact
- All anvils laser marked for easy selection
- Includes sturdy aluminum case
- Resolution: .0005

Stock No.	Range	Probe Depth	Contacts
LST12456	0.7-1.5 "	6 "	10
LST12457	1.4-2.4 "	6 "	6
LST12458	2-6 "	6 "	11

25 Series ADG Group 2 Dial Indicators

- Double Dial & Revolution Counter
- Jewel Bearings
- Rotatable bezel w/lock
- Hardened steel gear train

STARRETT: 25
SNAP-ON: LST53299

Stock No.	Graduation	Range One Rev.	Range Total	Dial Reading
LST53299	.0001"	.010"	.200"	0-5-0
LST53304	.0005"	.050"	1.000"	0-50
LST53295	.001"	.100"	1.000"	0-100
LST53294*	.001"	.100"	.500"	0-100
LST53287	.001"	.100"	1.000"	0-50-0

*Plain Bearings

2900 Series Electronic Indicators

- True Absolute Sensor Technology – remembers position and zero set point even during battery replacement. Cannot be "over-sped" into failure.
- Intuitive design and layout – easy to learn and use
- Positive, tactile-feel button activation
- IP67 protection against dirt, dust water and coolant to withstand hostile shop environments
- Data output

STARRETT: 2900
SNAP-ON: LST09980

Stock No.	Graduation	Res. (in)	Feaures
LST09980	.5"/12mm	.00005"/0.001mm	Basic
LST09981	.5"/12mm	.0001"/0.001mm	Basic
LST09983	.5"/12mm	.0005"/.0001"/.00005"	Advanced

196 Series Universal Back-Plunger Dial Test Indicator

- Accurate, reliable, simple to operate
- Large assortment of accessories available

Stock No.	Graduation	Range	Dial Reading
LST50697*	.001"	.200"	0-100
LST50699**	.001"	.200"	0-100

*Indicator with 3 contact points, adapter, case, 4 attachments – clamp, tool post holder, snug and hole attachment.
**Indicator comes with 3 contact points and adapter.

STARRETT: 196
SNAP-ON: LST50697

STARRETT:440
SNAP-ON: LST52113

Micrometer Depth Gages

- Range: 0-9"
- Adjustable Rods
- With Ratchet Stop & Locknut
- Graduation: .001"
- Protective Case

	Stock No.	Range	Base	No. of Rods	Rod Diameter
4w40 Series	LST52113*	0-3"	2 ½"	3	⅛"
	LST52115	0-3"	2 ½"	3	⅛"
	LST52119	0-6"	2 ½"	6	⅛"
	LST52123	0-9"	2 ½"	9	⅛"
445 Series	LST52208	0-3"	3"	3	5/32"
	LST52212	0-6"	3"	6	5/32"
	LST52216	0-9"	3"	9	5/32"
	LST52220	0-3"	4"	3	5/32"
	LST52224	0-6"	4"	6	5/32"
	LST52228	0-9"	4"	9	5/32"

* With locknut only, in case

449 Series Micrometer Depth Gages with non-rotating blades

- Non-rotating, blade type rods
- For slots as narrow as .045"
- Graduation: .001"

STARRETT:449
SNAP-ON: LST5218

Stock No.	Range	Base Length	No. of Rods
LST52318	0 – 3"	2 ½"	3
LST52320	0 – 6"	2 ½"	6
LST52322	0 – 3"	4"	3
LST52324	0 – 6"	4"	6

25 Series Dial Indicators with long range

- Interchangeable contact point
- Jewel Bearings

STARRETT: 25
SNAP-ON: LST53309

Stock No.	Graduation	Range One Rev.	Range Total	Dial Reading
LST53309	.001"	.100"	2.000"	0-100

3600 Series Electronic Indicator

- Large, easy-to-read LCD
- Range: .500" or 12.7mm
- Resolution: .0005" or .01mm
- Reverse travel (± control indicates direction)
- Zero setting at any position
- ⅜" diameter stem
- Lug-on-center back + additional flat back

STARRETT: 3600
SNAP-ON: LST68813

Stock No.	Graduation	Range One Rev.	Range Total	Dial Reading
LST53309	.001"	.100"	2.000"	0-100

25R Contact Point Set

- 14 points with #4-48 screw thread to fit AGD indicators
- High grade steel, hardened and ground
- All points are mounted on an aluminum ring

STARRETT: 25R
SNAP-ON: LST50153

Stock No.	Description
LST50153	Set includes: Regular 1/4" (6.3mm) long point, 9 special form points, No. 28
	Shock Absorbing Anvil, 3 extra long points – 1/2", 3/4" and 1" (13, 19, 25mm)

Dial Test Indicators w/dovetail mounts

STARRETT: 709
SNAP-ON: LST64219

- Large 1 3/8" diameter Dial faces
- Long 13/16" carbide Contact Point
- Three standardized dovetail positioning mounts
- Easy to read angled head
- Meets or exceeds ISO accuracy specifications
- Precision gear drive with jeweled movement
- Furnished in case

	Stock No.	Graduation	Range	Dial Reading	Description	Dial Color
709 Series	LST64219	.0005"	.030"	0-15-0	With Attachments	White
708 Series	LST64217	.0001"	.010"	0-5-0	With Attachments	White

711 SeriesLast Word® Dial Test Indicators

STARRETT: 711
SNAP-ON: LST52943

- Steel contact points length: 5/32" (4mm)
- Easy reading dials, half-shaded yellow for clarity
- Smooth, jeweled lever action
- Positive reversing switch
- Hard chrome-plated ratchet contact point
- Ideal for precise measurements in machining, layout, and inspection work

Stock No.	Graduation	Range	Dial Reading	Description
LST52943	.001"	.030"	0-15-0	Indicator with ALL attachments*
LST52957	.0005"	.030"	0-15-0	Indicator with ALL attachments*
LST52925	.001"	.030"	0-15-0	Indicator with universal shank with long and short arm, body clamp, and one contact point .120"

*Attachments include 3 contact points – .035", .062", .120" – body clamp – universal friction holder with shank – universal shank complete with long & short arm – double-jointed attachment – height gage attachment – surface gage attachment – coupling with 3/16" (4.8 mm) hole.

- Large, easy-to-read LCD display reads to .0005" (0.01mm)
- Instant inch-millimeter conversion
- "Hold" control feature retaining a reading at any position
- Plus or minus direction selector
- Ability to set zero at any position
- Ability to install minimum and maximum limits

STARRETT: 3752
SNAP-ON: LST68815

33259 Dial Height Gages

- Hardened, stainless steel bar, gears, scriber, and scriber carrier
- Zero/reset button located on the digital counter
- Carbide tipped scriber and clamp
- Locking lever
- Hardened and ground base lapped for flatness

Stock No.	Range	Description
LST68815	0-12" (300 mm)	Height Gage without case
LST68816	0-24" (600 mm)	Height Gage without case
LST12219	0-12" (300 mm)	Height Gage without case
LST69906	0-24" (600 mm)	Height Gage without case

⚠ WARNING

660 Series Magnetic Base Universal Indicator Holder with triple-jointed arm & fine-adjustment

- Three pivots for positioning indicator tightening knob
- Base includes articulating arm with dovetail and stem hole clamp
- Small, powerful, versatile & compact(1.2" x 1.6" x 1.4")
- 72 lb. pull
- Holds indicators w/3/8" (9.5mm) stem
- Holds indicators w/ standard dovetail mount

Stock No.	Description
LST68621	Magnetic Base Universal Indicator Holder with triple-jointed arm and fine-adjustment

STARRETT: 660
SNAP-ON: LST68621

659 Series Heavy-Duty Magnetic Base Indicator Holder with rotary on-off switch

- Powerful magnetic base
- Fine adjustment at the end of the gage rod
- Indicator positioned at any height or angle
- Extra tapped hole in base for multiple inspection work

STARRETT: 659
SNAP-ON: LST56687

Stock No.	Description
LST56687	Magnetic Base, Upright Post Assembly Including Post, Snug, Gage Rod with Clamp and Fine Adjust, and Thread Adapter, without Indicator, without Case
LST55948	Base and Upright Post Assembly with Inch reading indicator No. 25-131J in Case

STARRETT: 657
SNAP-ON: LST52743

STARRETT: 657D
SNAP-ON: LST52749

STARRETT: 657T
SNAP-ON: LST52760

657AA Magnetic Base Indicator Holderwith attachments LST52743

- Three precision ground magnetic contact surfaces
- Grips horizontally, vertically or upside down
- V-step holds base to arbors, shafts & chucks
- Push button on-off switch
- Threaded end fits lug backs of all indicators

657D Series Magnetic Base Indicator Holder with attachments LST52749

- Swivel Post Snug allows adjustment to any vertical angle

657T Series Flex-O-Post Indicator Holder with magnetic base LST52760

- For use with all Starrett Dial Indicators
- Can be adjusted and locked to any position
- Vertical reach of 15", horizontal reach of 10"
- 360° indicator snug can be locked in any position

PRECISION TOOLS

Parallels

No.	Range	Length	Thickness
A	3/8 - 1/2"	1 3/4"	9/32"
B	1/2 - 11/16"	2 1/8"	9/32"
C	11/16 - 15/16"	2 11/16"	9/32"
D	15/16 - 1 5/16"	3 9/16"	9/32"
E	1 5/16 - 1 3/4"	4 3/16"	9/32"

	Stock No.	Description
154 Series	LST50586	Set consists of 6 parallels-A,B,C,D,E,F w/case
	LST50584	Set consists of 4 parallels-A,B,C,D w/case

STARRETT: 154
SNAP-ON: LST50586

568 Series V-Blocks and Clamps



- Hardened steel precision ground on all sides
- 3/8-16 tapped holes for face plate mounting
- Stepped grooves for high & low clamping
- For round or square work

STARRETT: 568
SNAP-ON: LST52590

Stock No.	Capacity	Description
LST52590	2" (50 mm) dia. round;	1 V-Block and Clamp
LST52592	1 7/16" (36 mm) square (1 9/16" [40 mm] w/screw at top)	Complete Set w/2 V-Blocks & 2 Clamps (Matched Pair)
LST52591		Clamp Only

C183 Steel Protractor LST50672



- 6" locking blade
- Satin chrome finish
- Range: 0-180°

STARRETT: C183
SNAP-ON: LST50672

C493B Protractor and Depth Gage LST52534



- 6" locking blade
- Satin chrome finish
- Range: 0-180°
- Blade graduations: 32nds, 64ths

STARRETT: C493B
SNAP-ON: LST52534

237 Steel Rule Depth Gage LST51080

- 6" locking rule
- Case hardened steel head
- Blade graduations: 32nds, 64ths

STARRETT: 237
SNAP-ON: LST51080

67B Improved Scriber LST50317

- Scribers are steel, properly tempered & well-finished
- Points are finely tapered
- Two points are furnished: 1 straight, 1 short bent
- Knurled handle & points
- Nickel plating on handle

STARRETT: 67B
SNAP-ON: LST50317

AM-2 Angle Meter LST36080

- Finds angles & level readings easily & quickly
- Measures any angle for pitch or slope
- High-impact plastic construction
- Magnetic base & back

STARRETT: AM-2
SNAP-ON: LST36080

98 a Machinists' Improved Levels

- Adjustable main vial
- Involute groove running length of base
- Bases are seasoned castings wrinkle finish
- Accurately machined on bearing surface

STARRETT: 98
SNAP-ON: LST50440

Stock No.	Size	Description
LST50440	4"	Without cross test vial
LST50441	6"	With cross test vial
LST50442	8"	With cross test vial
LST50443	12"	With single plumb vial and cross test vial
LST50445	18"	With double plumb vial and cross test vial

135 Series Pocket Level with Satin Nickel-Plated Finish

- Fits handily in the pocket with no sharp edges
- Made from hexagon stock with convex ends

STARRETT: 135
SNAP-ON: LST50570

Stock No.	Size	Description
LST50570	2 1/2" (63 mm)	With Main Vial
LST50571	3 1/2" (88 mm)	With Main Vial

199Z Master Precision Level LST50719

- 15" long x 1 5/8" wide x 3" high
- 10-second accuracy of graduated main vial
- Auxiliary vials for lateral & horizontal setting
- Castings thoroughly seasoned and machined

STARRETT: 199Z
SNAP-ON: LST50719

134 Cross Test Level and Plumb

- Two vials at right angles for cross test leveling
- For approximate squaring, leveling & machine set-up

STARRETT: 134
SNAP-ON: LST50569

Stock No.	Size	Description
LST50569	2" x 3" x 1/2"	w/cross test vials & plumb vial

505 Series Miter and Combination Protractor

- Miter Cut (for miter joints): Transfer readings directly to the Miter Saw
- Compound Cut Conversion Table (on the bottom leg with the tool facing up): Specifically for the Compound Miter Saw
- Protractor (Reverse side)
- Roof Pitch Scale

STARRETT: 505
SNAP-ON: LST12256

Stock No.	Description
LST12256	Combination Protractor, Miter Gage, With Compound Cut Conversion Table and Quick Roof Pitch Reference

187 Jobbers' Drill Gage – Hardened



- Range: 1/6-1/2"
- Approximately 5/64" thick by 2 5/16" by 6 1/4" long
- Size of any twist drill from 1/16-1/2" by 64ths can be quickly determined
- 29 holes marked with the drill size in inches and the decimal equivalent
- Information steel stamped on one side & white marked on the reverse side

Stock No.	Description
LST50677	Jobbers' Drill Gage

STARRETT: 187
SNAP-ON: LST50677

STARRETT:
SNAP-ON: LST50035

Screw Pitch Gages

Starrett screw pitch gages quickly determine the pitch of various threads. These gages consist of a substantial steel case with a number of folding leaves at both ends, each leaf having teeth corresponding to a definite pitch, marked on each leaf.

- V, Unified, American National 60º threads
- International Metric Standard 60º threads

Stock No.	Description	No. of Leaves	Sizes
LST50035	Screw Pitch Gage V Unified, TPI 4 to 42	30	4, 4-½, 5, 5-½, 6, 7, 8, 9, 10, 11, 11-½, 12, 13, 14, 15, 16, 18, 20, 22, 24, 26, 27, 28, 30, 32, 34, 36, 38, 40, 42
LST52484	Screw Pitch Gage, V, Unified, TPI 4 to 84	51	First Corner 17 Leaves: 4, 4-½, 5, 5-½, 6, 7, 8, 9, 10, 11, 11-½, 12, 13, 14, 15, 16, 18
–	—	—	Second Corner 17 Leaves: 20, 22, 24, 26, 27, 28,30, 32, 34, 36, 38, 40, 42, 44, 46, 48, 50
–	—	—	Third Corner 17 Leaves: 52, 54, 56, 58, 60, 62, 64, 66, 68, 70, 72, 74, 76, 78, 80, 82, 84
LST52486	Screw Pitch Gage, V, Unified, 4 to 80	28	4, 4-½, 5, 6, 7, 8, 9, 10, 11, 11-½, 12, 13, 14, 16, 18, 20, 24, 27, 28, 32, 36, 40, 44, 48, 56, 64, 72, 80
LST50589	Screw Pitch Gage, Metric, 0.25 to 2.5	28	0.25, 0.30, 0.35, 0.40, 0.45, 0.50, 0.55, 0.60, 0.65, 0.70, 0.75, 0.80, 0.85, 0.90, 1, 1.10, 1.20, 1.25, 1.30, 1.40, 1.50, 1.60, 1.70, 1.75, 1.80, 1.90 2, 2.50
LST50591	Screw Pitch Gage, Metric, 1 to 11.5	28	0.5, 0.75, 1, 1.10, 1.25, 1.5, 1.75, 2, 2.5, 3, 3.5, 4, 4.5, 5, 5.5, 6, 6.5, 7, 7.5, 8, 8.5, 9, 9.5, 10, 10.5, 11, 11.5 and 60º Center Gage

S831EZ Series Small Hole Gages

Stock No.	Description
LST53087	Set of 4 in case: Nos. 831A,B,C,D

STARRETT: S831EZ
SNAP-ON: LST53087

91 Series Tap Wrenches

- Made of rugged steel with tempered gripping surface

Stock No.	Capacity		
	Tap Size	Square Shank	Body Length
LST50419	1/16-1/4"	3/32-5/32"	6"
LST50420	3/16-1/2"	5/32-3/32"	9"
LST50421	1/4-5/8"	5/32-3/8"	12"
LST50422	5/16-3/4"	13/64-7/16"	16"

STARRETT: 91
SNAP-ON: LST50419

Starrett Thickness Gages

- Leaves made of tempered-steel and marked with thickness
- Locking device
- Leaves easily removed or replaced
- Rugged steel case

STARRETT:
SNAP-ON: LST50314

827 Series Edge Finders

STARRETT: 827
SNAP-ON: LST53062

- Locate work surface easily, quickly & accurately
- Body & contacts made of hardened, ground tool steel
- Double-end model has pointed contact center point & scribed lines

Stock No.	Description	Body Diameter	Contact Diameter
LST53062	Single End	.375"	.200"
LST53063	Double End	.500"	.200" & pointed contact

269 Series .100-1" Taper Gages

These gages are for determining hole sizes in dies and other work. They read in thousandths of an inch or 0.02mm. Made of tempered steel with a locking device.

Stock No.	Range	Length	No. Leaves
LST51290	.100-.500"	2 ½"	8
LST51291	.500-1"	2 ¾"	10

STARRETT: 269
SNAP-ON: LST51290

93 Series T-Handle Tap Wrenches

- Centered body for use on lathe or drilling machines
- Heat treated jaws
- Sliding handle

STARRETT: 93
SNAP-ON: LST50427

Stock No.	Capacity Tap Size	Capacity Square Shank	Body Length
LST50427	1/16 - 3/16"	1/16 - 5/32"	2"
LST50428	7/32 - 7/16"	5/32 - 1/4"	2 ½"
LST50429	1/4 - 1/2"	3/16 - 5/32"	3 ½"
LST50430	1/16 - 3/16"	1/16 - 5/32"	6"
LST50431	7/32 - 7/16"	5/32 - 1/4"	10"
LST50432	1/4 - 1/2"	3/16 - 5/16"	13"

579 Series Telescoping Gage Set

- Two automatically self-centering contacts
- Contact points are hardened & radius ground



STARRETT: 579
SNAP-ON: LST52616

Stock No.	No. of Gauges	Description
LST52616	4	4 pc. set – 5/16" to 2 1/8"*
LST52617	6	6 pc. set – 5/16" to 6"*

*in protective case

270 Series Taper Gage

STARRETT: 270
SNAP-ON: LST51292

- Useful for bearing work and for gaging slots
- Made of quality tool steel 7/16" (11 mm) wide by 6 1/4" (160 mm) long
- Graduated from .010" to .150" in thousandths of an inch and the reverse side from 0.3 mm to 4 mm in one-twentieth of a mm (0.05 mm)

Stock No.	Range (in.)	Range (mm)	Description
LST51292	.010-.150"	0.3-4 mm	Taper Gage

166 Series Pin Vises

- Insulated, octagonal PVC handles
- For small wire, reamers, drills, taps & stock
- Hole extends length of handle

Stock No.	Range in (mm)
LST50609	0-.040" (0-1 mm)
LST50610	.030-.062" (0.8-1.6 mm)
LST50611	.050-.125" (1.3-3.2 mm)
LST50612	.115-.187" (2.9-4.8 mm)
LST50614	Set of all 4 sizes in protective vinyl case

STARRETT: 166
SNAP-ON: LST50609

Stock No.	Description	Range (in.)	Leave Size	Leave No.	Leave Type	Locking Device	Leave Sizes
LST50314	Thickness Gage, 26 Straight Leaves	0.0015-0.25	½ x 3 1/32	26	Straight	Yes	.0015, .002, .0025, .003, .004, .005, .006, .007, .008, .009, .010, .011, .012, .013, .014, .015, .016, .017, .018, .019, .020, .021, .022, .023, .024, .025
LST50315	Thickness Gage, 26 Tapered Leaves	0.0015-0.25	½-¼ x 3 1/32	26	Tapered	Yes	.0015, .002, .0025, .003, .004, .005, .006, .007, .008, .009, .010, .011, .012, .013, .014, .015, .016, .017, .018, .019, .020, .021, .022, .023, .024, .025
LST52464	Thickness Gage, 13 Straight Leaves	0.0015-0.200	½ x 4 ½	13	Straight	Yes	.0015, .002, .003, .004, .006, .008, .010, .020, .030, .040, .075, .100, .200
LST57098	Thickness Gage, 22 Leaves Plus SP Wires	0.0015-0.035	½ x 3 1/32	22	Straight	Yes	.0015, .002, .0025, .003, .004, .005, .006, .007, .008, .009, .010, .012, .013, .014, .015, .016, .018, .020, .022, .025, .030, .035 Spark Plug Wire Gages: .025, .030, .034, .035, .040, .045

⚠ WARNING

PRECISION TOOLS

Starrett

283 Series U.S. Standard Gage – Hardened LST51318

- Nos. 0-36 (.3125-.007") range
- Made to the United States Standard for uncoated sheet, plate iron and steel
- Satin finish
- Decimal equivalents on reverse side

STARRETT: 283
SNAP-ON: LST51318

281 Series American Standard Wire Gage LST51316

- Hardened & tested
- Range: Nos. 0-36 (.325-.005")
- For gaging sheets, plate & wire of non-ferrous metals
- Decimal equivalents on reverse side
- Satin finish
- Accepted standard adopted by brass manufacturers

STARRETT: 281
SNAP-ON: LST51316

STARRETT: C310K-6
SNAP-ON: LST56701

C310K-6 Series Steel Rule with Pocket Clip

- Fine quality steel w/easy-to-read satin chrome finish
- Highly accurate. Matches Starrett master standards

Stock No.	Length	Width x Thickness	Steel	Graduations
LST56701	6"	½" x 1/64"	Full-Flexible	No. 10 - 32nds and 64ths One Side Only

668 Series Shaft Alignment Clamp Sets

Starrett Shaft Alignment Clamp is designed for fast, precise alignment of motors, pumps, and compressors

- Lightweight clamp design - black anodized aluminum
- Rigid ⅜" diameter stainless steel indicator posts provided in three lengths (5", 7-7/16", and 9")
- Heavy-duty roller chain can accommodate up to a 7-½ diameter shaft
- Sets are available with either two Starrett Nos. 196B5 or 81-141J Indicators or clamps alone

STARRETT: 668
SNAP-ON: LST57152

Stock No.	Description
LST67152	Shaft Alignment Set,196B5 Indicators, Case
LST67153	Shaft Alignment Set, 81-141J Indicators, Case
LST67151	Shaft Alignment Set,Clamp, Plate and Posts, Case
LST67150	Shaft Alignment Clamp, Plate and Posts
LST67155	Shaft Alignment Clamp Only

83 Series "Yankee" Dividers with flat legs

- Made of durable high-grade steel
- Extra strong, flexible bow spring
- Fulcrum stud: hardened w/ smooth surface
- Quick adjust spring nut

With Solid Nut	Quick-Spring Nut	
Stock No.	Stock No.	Size / Capacity
LST50376	LST50377	4" (100 mm)
LST50378	LST50379	6" (150 mm)
LST50380	LST50381	8" (200 mm)
LST50384	LST50385	12" (300 mm)



STARRETT: 83
SNAP-ON: LST50377

Starrett Brass Pin Punches – Ideal for Delicate Work

- Ideal for Delicate Work
- B565 Brass Punches, 4 Inch Length, eight sizes from 1/16" to 5/16"
- B248 Extended Length Brass Punches, 8 inch Length, four sizes from 3/16" to ⅜"

STARRETT: SB565Z
SNAP-ON: LST12473

	Stock No.	Description
B565 Series Brass Drive Pin Punches & Sets	LST12465	Brass Drive Pin Punch, 4 In, 1/16 In Dia
	LST12466	Brass Drive Pin Punch, 4 In, 3/32 In Dia
	LST12467	Brass Drive Pin Punch, 4 In, 1/8 In Dia
	LST12468	Brass Drive Pin Punch, 4 In, 5/32 In Dia
	LST12469	Brass Drive Pin Punch, 4 In, 3/16 In Dia
	LST12470	Brass Drive Pin Punch, 4 In, 7/32 In Dia
	LST12471	Brass Drive Pin Punch, 4 In, ¼ In Dia
	LST12472	Brass Drive Pin Punch, 4 In, 5/16 In Dia
	LST12473	Brass Drive Pin Punch Set, 8 Pc, Case
B248 Series Brass Drive Pin Punches & Sets	LST12460	Brass Drive Pin Punch, 8 In, 3/16 In Dia
	LST12461	Brass Drive Pin Punch, 8 In, ¼ Dia
	LST12462	Brass Drive Pin Punch, 8 In, 5/16 Dia
	LST12463	Brass Drive Pin Punch, 8 In, ⅜ Dia
	LST12464	Brass Drive Pin Punch, Set, B248B/C/D/E

C391 Series Center Gage

- For grinding & setting screw cutting tools
- Satin chrome finish
- Graduations in 14ths, 20ths, 24ths and 32nds of an inch
- Table of double depths of threads for determining tap drill sizes
- Made of spring-tempered steel

STARRETT: C391
SNAP-ON: LST12465

Stock No.	Description
LST51475	Inch grads., American Unified National Standard, 60°

S248PC Series Drive Pin Punches

- Set of 5 punches in protective vinyl case
- Extra-long 8" (200 mm)
- Bodies, 4 ½" (115 mm); Drive pin sections, 3 ½" (90 mm)
- Hardened & tempered
- Knurled grip

STARRETT: S248PC
SNAP-ON: LST51186

Stock No.	Description
LST51186	Dia. of Punches: 1/8"(3 mm), 3/16" (5 mm), ¼" (6 mm), 5/16" (8 mm) and ⅜" (9.5 mm)

S565WB Series Drive Pin Punches

- Well proportioned, hardened, properly tempered
- Knurled finger grip
- Set of 8 punches in round plastic box
- Each punch has size stamped on head
- 4" (100 mm) length

STARRETT: S565WB
SNAP-ON: LST52586

Stock No.	Punch Diameters
LST52586	1/16" (1.5 mm), 3/32" (2.5 mm), 1/8" (3 mm), 5/32" (4 mm), 3/16" (5 mm), 7/32" (5.5 mm), ¼" (6 mm), 5/16" (8 mm)

50 Series Trammel Heads with divider points, pencil socket

- Die cast heads w/ black wrinkle finish
- Hardened, forged steel divider points
- No. 50A has an adjustable point

STARRETT: 50
SNAP-ON: LST50268

Stock No.	Point Size	Description
LST50268	3, 2 ½" (75, 63 mm)	(Adjustable) Includes 2 Heads, 2 Points, Pencil Socket
LST50269	3" (75 mm)	Includes 2 Heads, 2 Points, Pencil Socket

S167CHZ Radius Gage Set

- Satin finish stainless steel
- Clearly marked with radius
- Five different gaging surfaces for convex & concave radii
- Precision finished radii
- Gage Holder, 4" long

STARRETT: S167CHZ
SNAP-ON: LST50619

Stock No.	Radii Range	Increments	Gages/Set	Description
LST50619	1/64-17/64" 9/32-½"	64ths 32nds	25	with Holder

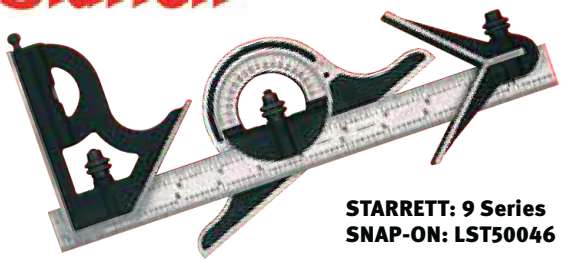

STARRETT: 9 Series
SNAP-ON: LST50046

Combination Set w/Non Reversible Protractor Head

- Non-reversible protractor head
- Cast iron heads
- Black wrinkle finish
- Blade graduations: 8ths, 16ths, Quick Reading 32nds, 64ths
- Accuracy of head to blade: ±.002"
- Tempered steel, machine divided blade
- Reversible lock bolt, scriber & spirit level

	Stock No.	Blade	Size
9 Series	LST50046	Satin Chrome	12"
	LST50044	Regular	18"
	LST50045	Regular	24"

	Stock No.	Size	Blade
9-12-4R Series	LST50042	12"	Regular



STARRETT: C303
SNAP-ON: LST51334

Steel Rules

- Fine quality steel w/ easy-to-read satin chrome finish
- Machine divided (not photo-engraved) for uniformity of line depth & width
- Highly accurate. Matches Starrett master standards

	Stock No.	Length	Width/ Thickness	Steel	Graduations
C303, C304 Series	LST51334	6"	½" x 1/64"	Full-Flexible	No. 3R QR 10ths, Aircraft QR 50ths, 32nds, & 64ths
	LST66008	6"	½" x 1/64"	Full-Flexible	No. 4R – 8ths, 16ths, QR 32nds & 64ths
	LST51343	6"	¾" x 1/50"	Semi-Flexible	
	LST51344	12"	1" x 1/40"	Semi-Flexible	
	LST56645	24"	¾ x 1/50"	Full-Flexible	
C305 Series	LST51347	6"	½" x 1/64"	Full-Flexible	No. 5R – Quick-Reading 10ths, Aircraft
	LST51348	12"	½" x 1/64"	Full-Flexible	Quick-Reading 100ths,32nds, and 64ths
C316 Series	LST51374	6"	½" x 1/64"	Full-Flexible	No. 16R – Quick-Reading 32nds, 64ths, Aircraft Quick-Reading, 50ths, & 100ths
	LST51375	12"	½" x 1/64"	Full-Flexible	

- Spring-tempered steel
- No. 4R Graduations - 8ths, 16ths, quick reading 32nds and 64ths
- Fine quality steel w/easy-to-read satin chrome finish
- Machine divided (not photo-engraved) for uniformity of line depth & width
- Highly accurate. Matches Starrett master standards

STARRETT: C604
SNAP-ON: LST52660

	Stock No.	Length	Width x Thickness
C604 Series	LST52660***	6"	¾" x 3/64"
	LST52673****	6"	¾" x 3/64"
	LST52678*	6"	¾" x 3/64"
	LST52679**	12"	1" x 3/64"
	LST52680**	18"	1 1/8" x 3/64"
	LST52681**	24"	1 ¼" x 3/64"

* Single row of inch figures
** Double row of inch figures
*** End graduations
**** Reversible hook

⚠ WARNING

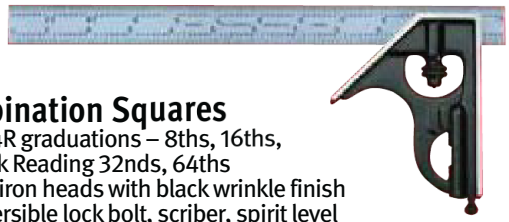

Combination Squares

- No. 4R graduations – 8ths, 16ths, Quick Reading 32nds, 64ths
- Cast iron heads with black wrinkle finish
- Reversible lock bolt, scriber, spirit level
- Hardened steel, machine-divided blade
- Easy to read, sharp graduations

STARRETT: 11H Series
SNAP-ON: LST56366

	Stock No.	Blade	Size
11H Series	LST56366	Satin Chrome	12"
	LST50059	Regular	18"
	LST50063	Regular	24"

	Stock No.	Size	Blade
11H-12-4R C11H-6-4R	LST50055	12"	Regular
	LST56362	6"	Satin Chrome

STARRETT: 434 Series
SNAP-ON: LST51542

Combination Set w/Reversible Protractor Head

- No. 4R - 8ths, 16ths, Quick Reading 32nds, 64ths graduations
- Double reading 180° protractor head
- Tempered steel, machine divided blade
- Bearing surfaces are accurately ground
- Reversible lock bolt, scriber & spirit level

	Stock No.	Description	Blade
434, 435 Series	LST51542	Forged & Hardened Steel Square Heads & Center Head	Regular
	LST51548	Cast Iron Protractor Head w/ Smooth Black Enamel Finish	Satin Chrome
	LST51556	Cast Iron Heads with Black Wrinkle Finish	Regular

Steel Straight Edges

Precision ground to rigid Starrett standards. They are unexcelled for drawing or scribing straight lines and checking surfaces for straightness.

STARRETT:
SNAP-ON: LST51438

Stock No.	Item Description	Width x Thickness
LST51438	Straight Edge, 12 "	1 13/32" x 1/64"
LST51440	Straight Edge, 24"	1 13/32" x 1/64"
LST51441	Straight Edge, 36"	2 13/32" x 7/32"
LST51455	Straight Edge, Beveled, 12"	1 13/32" x 1/64"
LST51457	Straight Edge, Beveled, 24"	1 13/32" x 1/64"
LST51459	Straight Edge, Beveled, 48"	2 13/32" x 7/32"

Combination Set w/Square Head & Center Head

	Stock No.	Blade	Size	Graduation
33HC Series	LST56393	Satin Chrome	6"	4R – 8ths, 16ths, Quick Reading 32nds, 64ths
	LST56397	Satin Chrome	12"	4R – 8ths, 16ths, Quick Reading 32nds, 64ths
	LST56399	Satin Chrome	12"	16R – Quick Reading 32nds, 64ths, Aircraft QR 50ths, 100ths

Stock No.	Fits Blade Size	Description
LST50224	6"	Square Head Only
LST50227	6"	Center Head Only
LST50225	12", 18", 24"	Square Head Only
LST50228	12", 18", 24"	Center Head Only
LST64601	12" and up	Protractor Head, black wrinkle, chrome on turret

SAFE PRODUCTS. AND SOUND INSTRUCTION.

Snap-on
THE RIGHT WAY EVERY DAY
SAFETY

At Snap-on, safety is a top priority. That's why we offer not just the safest products in the business, but the training and instruction on how to use them properly. It provides techs with a "safety network," one that encompasses tools, topics and training on features and safe usage. Our safety programs help tool users identify the signs that signal when a tool is nearing the end of its life, and how to determine the right tool for any and every job. Plus, Snap-on can create custom tools, so that they can be used for their original purpose and safety won't be compromised. From products like safety glasses, ear protection and face protectors, to educational and training programs, it's safe to say Snap-on helps you do your job safely.

LOOKING FOR SAFETY?

Contact your Account Manager for a free Safety Seminar or call 1.877.740.1900.

Overview.....N204
Tools@Height Tool Sets N206
Tethering N212
1/4" Drive Retention System Tools N220
3/8" Drive Retention System Tools N224
1/2" Drive Retention System Tools..... N228
3/4" Drive Retention System Tools..... N231
Hand Tools N232
Universal Attachment Points N246
Safety Products N248

TOOLS@ HEIGHT & SAFETY

KEEP STRONG TIES WITH YOUR TOOLS.

When pros use tools at height, bad things can happen: tools can drop into hardware, engines and machinery. What's more, people can get hurt – or worse. That's why Snap-on designed Tools@Height, a tethered tool program for applications involving work being performed at height, and anywhere else dropped or lost objects are a concern. In the industry's most comprehensive drop prevention program, all tools are engineered with a tethered system to maintain or enhance the tools' functionality, when used at height or near critical assemblies. And, the Tools@Height program offers tools for both high-and low-level uses. It's one more way Snap-on keeps strong ties with the pros.

BECAUSE SAFETY IS OF PARAMOUNT IMPORTANCE, SNAP-ON KEEPS THE WELFARE OF PROFESSIONALS – AND THE CRITICAL ASSEMBLIES THEY SERVICE – AT THE FOREFRONT.

SAFETY INNOVATIONS

Four holes are better (and safer) than one. Snap-on Tools@Height sockets, extensions, and adaptors feature a locking hole on all four sides, not just one. Snap-on Tools@Height ratchets and drive tools feature a locking pin which mates with the side lock hole for positive retention. Typical competitor's sockets with just one side hole have increased risk of falling apart. Snap-on Tools@Height assortment helps reduce the risk of damage to assemblies you are working on and – more importantly – people you are working with.

TOOLS@HEIGHT DROP PREVENTION SYSTEM MASTER KIT

Snap-on Tools@Height Drop Prevention System Master Kit

Our master kit provides a great selection of tools with engineered attachment points to help you work safely and productively wherever drop prevention is needed. No mechanical, maintenance, or electrical job is too big for this kit. This complete kit includes Snap-on wrenches and square drive tools in both fractional and metric sizes. It also includes a lift bag, tool pouch, small parts bag, tool belt and loops, and all of the lanyards you will need to operate safely and effectively.

- See the complete list of contents on page N210
- Engineered attachment points maintain or enhance tethered tools functionality so you are productive AND safe
- Kit is organized in KRA4107 roll cab and KRA4114 top chest
- Tool control foam keeps the kit organized and inventory can be taken with a glance
- A large selection of tools help you perform mechanical and maintenance jobs
- 1000V tools help you perform electrical work safely on systems up to 1000VAC and 1500VDC

Snap-On Tools@Height Drop Prevention System General Purpose Kit

Our general purpose kit provides a great selection of tools with engineered attachment points to help you work safely and productively wherever drop prevention is needed. No mechanical or maintenance job is too big for this kit. This kit includes Snap-on wrenches and square drive tools in both fractional and metric sizes. It also includes a lift bag, tool pouch, small parts bag, tool belt and loops, and all of the lanyards you will need to operate safely and effectively.

- See the complete list of contents on page N211
- Engineered attachment points maintain or enhance tethered tools functionality so you are productive AND safe
- Kit is organized in KRA4107 roll cab
- Tool control foam keeps the kit organized and inventory can be taken with a glance
- A large selection of tools help you perform mechanical and maintenance jobs

⚠ WARNING

- Do not open more than one loaded drawer at a time
- Keep children away
- Close lid, lock drawers and doors before moving
- Apply brakes on locking casters when not moving unit
- Do not step in or on drawers
- Secure units together with fasteners
- Do not pull; push to move
- Wear gloves when lifting by edges
- Keep feet and fingers clear of edges when stacking, hanging, or moving units
- Read additional safety precautions on pages W1 to W4

TOOL@HEIGHT SETS

THKITM1000V

Snap-on Tools@Height Drop Prevention System 1000v Electrical Kit

Our 1000v electrical kit provides a great selection of tools with engineered attachment points to help you work safely and productively wherever drop prevention is needed. No electrical job is too big for this kit. This complete kit includes open and box end wrenches, hex wrenches, screwdrivers, pliers and cutters, saws, and a digital multimeter with inspection pouch. It also includes a lift bag, tool pouch, small parts bag, tool belt and loops, and all of the lanyards you will need to operate safely and effectively.

- See the complete list of contents on page N211
- Engineered attachment points maintain or enhance tethered tools functionality so you are productive ***AND*** safe
- Kit is organized in KRA4114 top chest
- Tool control foam keeps the kit organized and inventory can be taken with a glance
- 1000V tools help you perform electrical work safely on systems up to 1000VAC and 1500VDC

Hub Hatch Tools for Wind Power Technicians

Wind technicians can attach the carabiner to their climbing harness before they climb out on top of the turbine to access the hub hatch. Once hatch fasteners are removed, the technician simply allows the retractor to bring the tool back up out of their way as they continue to work.

PALMRATHHTGE

PALMRATHHTVS

Hub Hatch Tool for GE 1.5mw Turbines

PALMRATHHTGE

Includes: **THPALMRAT** palm ratchet, **THFAM14E** 14mm hex driver, and **THUNIRET2** retractor with 2lb capacity and universal loop end.

Hub Hatch Tool for Vestas V82 Turbines

PALMRATHHTVS

Includes: **THPALMRAT** palm ratchet, **THPP410A**, and **THUNIRET2** retractor with 2lb capacity and universal loop end.

Kit comes assembled and includes tools shown below. Scaffold builders literally open the box, put on the belt, and go to work with a kit that keeps them safe and increases productivity. Since each tool is independently tethered, any tool can be used and returned to its' holster while still maintaining three points of contact.

Safe, Secure, and Customizable

- Holsters are designed with built-in attachment points or retractors
- Tools are tethered to the holster at all times so the risk of dropping a tool while transferring from bag to lanyard is eliminated
- Several holsters also feature hook and loop flaps that secure the tool while being transported
- System is completely modular and can be arranged in any order on the tool belt based on the user's preference
- All Tools @ Height holsters and pouches are also available for individual purchase for attachment to existing tool belts or harnesses

THSA936A

BS-63B

Scaffold Building Kit with Snap-on THSA936A Plastic Hammer Head Scaffold Wrench

Stock No.	Description	Size
THSCAFFSOSA	Scaffold Building Kit w/ Snap-on THSA936A Plastic Hammer Head Scaffold Wrench	Small
THSCAFFSOMA		Medium
THSCAFFSOLA		Large
THSCAFFSOXLA		X-Large

Individual Tethered Tools for Scaffold Building Kits with Snap-on Ratchet

Stock No.	Description
THFSNE3-22SM	Scaffold Hammer
THFSN25100	Scaffold Level
THSA936A	Scaffold Ratchet
THTPMA25EM	Tape Measure
THGAJ10A	Adjustable Wrench
TH59AHLP	Lineman's Pliers

Scaffold Building Kit with Williams JHWBS-63B Bronze Hammer Head Scaffold Wrench

Stock No.	Description	Size
THSCAFFSWSA	Scaffold Building Kit with Williams JHWBS-63B Bronze Hammer Head Scaffold Wrench	Small
THSCAFFSWMA		Medium
THSCAFFSWLA		Large
THSCAFFSWXLA		X-Large

Individual Tethered Tools For Scaffold Building Kits with Williams Ratchet

Stock No.	Description
THFSNE3-22SM	Scaffold Hammer
THFSN25100	Scaffold Level
JHWBS-63B	Scaffold Ratchet
THTPMA25EM	Tape Measure
THGAJ10A	Adjustable Wrench
TH59AHLP	Lineman's Pliers

⚠ WARNING

- Be sure to use a lanyard that has more weight capacity than the tool you are attaching because drop forces are greater than actual tool weight.
- Any tool that weighs more than 5 pounds should be attached to an anchor point such as a work platform or utility bucket rather than the operator.

TOOL@HEIGHT SET CONTENTS

THKITUS1000

Item (Qty)	Description
8MA (1)	FILE MILL 8IN
8R (1)	FILE ROUND 8IN
AWSG06 (1)	T HANDLE HEX 3/32
AWSG07 (1)	T HANDLE HEX 7/64
AWSG08 (1)	T HANDLE HEX 1/8
AWSG09 (1)	T HANDLE HEX 9/64
AWSG10 (1)	T HANDLE HEX 5/32
AWSG12 (1)	T HANDLE HEX 3/16
AWSG14 (1)	T HANDLE HEX 7/32
AWSG16 (1)	T HANDLE HEX 1/4
AWSG20 (1)	T HANDLE HEX 5/16
AWSG24 (1)	T HANDLE HEX 3/8
AWSGM10 (1)	T HANDLE HEX 10
AWSGM2 (1)	T HANDLE HEX 2
AWSGM2.5 (1)	T HANDLE HEX 2.5
AWSGM3 (1)	T HANDLE HEX 3
AWSGM4 (1)	T HANDLE HEX 4
AWSGM5 (1)	T HANDLE HEX 5
AWSGM6 (1)	T HANDLE HEX 6
AWSGM8 (1)	T HANDLE HEX 8
C59AHLP (1)	CMPOSITE LINEMAN
EEDM525E (1)	DIGITAL MULTIMETER
KRA4107FPJK (1)	7 DRAWER RC ORANGE
KRA4114FPJK (1)	YELLOW 4 DR TOP BOX
PPC103A (1)	PUNCH
PPC104A (1)	PIN PUNCH
PPC105A (1)	PIN PUNCH
PPC106A (1)	PIN PUNCH
PPC107A (1)	PIN PUNCH
PPC108A (1)	PUNCH
PPC110A (1)	PUNCH
PPC832B (1)	CHISEL
PYTBKT250HLV (1)	DURAHIDE LIFT BUCKET
PYTEXT5X12 (1)	TRIGGER TO TRIGGER WEB L
PYTEXT5X24 (1)	TRIGGER TO TRIGGER WEB L
PYTEXT5X36 (1)	1METRE WEB LANYARD C/W 6
PYTINSPECT (1)	METER AND INSPECTION TOO
PYTLOOP10PK (1)	WEB STRAP BELT LOOP WITH
PYTPCHPARTS (1)	SMALL PARTS POUCH BELT
PYTUTILXL (1)	TOOL BELT
TH1000VFOAM (1)	FOAM SET FOR 1000V KIT
TH2619kV (1)	1000V 250MM WATERPUMP PL
TH388CF (1)	CUTTERS DIAGONAL,200MM
TH497CFkV (1)	1000V 90DEG BENT-NOSE PL
TH57AHLPkV (1)	1000V 190MM LINESMAN PLI
TH59AHLPkV (1)	1000V 235MM LINESMAN PLI
TH807kV (1)	1000V WIRE-STRIPPING PLI
TH84CFkV (1)	1000V DIAG CUTTERS 120MM
TH85BCP (1)	CUTTERS DIAGNL 4-7/8 VIN
TH862kV (1)	1000V INSULATED HACKSAW
TH863kV (1)	1000V INSULATED JUNIOR H
TH87CFkV (1)	1000V 190MM DIAG CUTTERS
TH91ACPkV (1)	1000V 235MM ADJUSTABLE P
TH95BCP (1)	PLIER NEEDLE NSE 6IN VIN
TH95CFkV (1)	1000V 150MM NEEDLE NOSE
THA2A (2)	3/8-1/2IN STEP UP ADAPTO
THAD12AkV (1)	1000V 12" ADJUSTABLE WRE
THAD6AkV (1)	1000V 6" ADJUSTABLE WREN
THAWMCG10kV (1)	1000V INSULATED T-BAR HE
THAWMCG3kV (1)	1000V INSULATED T-BAR HE
THAWMCG4kV (1)	1000V INSULATED T-BAR HE
THAWMCG5kV (1)	1000V INSULATED T-BAR HE
THAWMCG6kV (1)	1000V INSULATED T-BAR HE
THAWMCG8kV (1)	1000V INSULATED T-BAR HE
THAWP120 (1)	PLIERS,WATERPUMP,250MM
THBC110B (1)	HAMMER,DEADBLOW 8LB 30IN
THBD10ESG (1)	HAMMER,10LB 30IN BLUE HA
THBD6ESG (1)	HAMMER,6LB 16IN HANDLE
THBPN32B (1)	HAMMER,BALL/P 32OZ
THCARA15 (3)	2 SST CARABINER TETHER
THCARA25 (2)	2 SST CARABINER TETHER
THCSA12C (1)	SCRAPER
THF081 (1)	SHALLOW SOCKET 12PT 3/8
THF101 (1)	SHALLOW SOCKET 12PT 3/8
THF80 (1)	3/8 RATCHET
THFA10E (1)	HEX DRIVER 3/8 DR
THFA12E (1)	HEX DRIVER 3/8 DR
THFA8E (1)	HEX DRIVER 3/8 DR
THFAM4E (1)	HEX DRIVER 3/8 DR
THFAM5E (1)	HEX DRIVER 3/8 DR
THFSM61 (1)	SOCKET 6MMX3/8IN DRIVE
THFSM71 (1)	SOCKET 7MMX3/8IN DRIVE
THGAJ10 (2)	ADJ WRN 10IN
THGAJ18 (2)	ADJ WRN 18IN
THGSAF1F (2)	1/2IN-3/8IN ADAPTOR
THHBPT16kV (1)	1000V INSULATED HAMMER,
THHSG319 (1)	HACKSAW
THL1 (4)	LANYARD W/TWO SST SNAP H

Item (Qty)	Description
THL2 (10)	LANYARD WITH SST SNAP HO
THLP10WR (1)	PLIERS VISE-GRP LOCKJAW
THNPB124B (1)	WRECKING BAR
THOEM10kV (1)	1000V INSULATED WRENCH 1
THOEM11kV (1)	1000V INSULATED WRENCH 1
THOEM12kV (1)	1000V INSULATED WRENCH 1
THOEM13kV (1)	1000V INSULATED WRENCH 1
THOEM14kV (1)	1000V INSULATED WRENCH 1
THOEM15kV (1)	1000V INSULATED WRENCH 1
THOEM16kV (1)	1000V INSULATED WRENCH 1
THOEM17kV (1)	1000V INSULATED WRENCH 1
THOEM18kV (1)	1000V INSULATED WRENCH 1
THOEM19kV (1)	1000V INSULATED WRENCH 1
THOEM6kV (1)	1000V INSULATED WRENCH 6
THOEM7kV (1)	1000V INSULATED WRENCH 7
THOEM8kV (1)	1000V INSULATED WRENCH 8
THOEM9kV (1)	1000V INSULATED WRENCH 9
THPPC5A (1)	PUNCH CHISEL HOLDER
THPRT (3)	ALUMINIM PIN RELEASE TOO
THPW10C (1)	PIPE WR 34022
THPWA24A (2)	WRENCH PIPE,EXT.24IN ALU
THPWC14kV (1)	1000V WIRE STRIPPER/CUTT
THPWC80kV (1)	1000V 190MM CABLE CUTTER
THPWCS9 (1)	WIRE STRIPPER
THQD3R250 (1)	TORQWRNCH CLICK 50-250FT
THRXFMS1012B (1)	WRENCH
THRXFMS1314B (1)	WRENCH
THRXFMS1517B (1)	WRENCH
THRXFMS1618B (1)	WRENCH
THRXFMS1921B (1)	WRENCH
THRXFMS911B (1)	WRENCH
THS8 (1)	UNIVERSAL JOINT 1/2IN DR
THS80A (2)	TAH 1/2IN RATCHET
THSA14E (1)	HEX DRIVER 1/2 DR
THSA16E (1)	HEX DRIVER 1/2 DR
THSA18E (1)	HEX DRIVER 1/2 DR
THSA20E (1)	HEX DRIVER 1/2 DR
THSA24E (1)	HEX DRIVER 1/2 DR
THSAM10E (1)	HEX DRIVER METRIC 1/2 DR
THSAM12E (1)	HEX DRIVER METRIC 1/2 DR
THSAM14E (1)	HEX DRIVER METRIC 1/2 DR
THSAM17E (1)	HEX DRIVER METRIC 1/2 DR
THSAM6E (1)	HEX DRIVER METRIC 1/2 DR
THSAM8E (1)	HEX DRIVER METRIC 1/2 DR
THSD869kV (1)	1000V S/DRIVER 0.5 X 3.
THSD870kV (1)	1000V S/DRIVER 0.8 X 4
THSD871kV (1)	1000V S/DRIVER 1.0 X 5
THSD872kV (1)	1000V S/DRIVER 1.2 X 6.
THSD873kV (1)	1000V S/DRIVER 1.2 X 8
THSD874kV (1)	1000V S/DRIVER 1.6 X 10
THSDP875kV (1)	1000V S/DRIVER PH1 X 75M
THSDP876kV (1)	1000V S/DRIVER PH2 X 100
THSDP877kV (1)	1000V S/DRIVER PH3 X 150
THSDZ878kV (1)	1000V S/DRIVER PZ1 X 75M
THSDZ879kV (1)	1000V S/DRIVER PZ2 X 100
THSDZ880kV (1)	1000V S/DRIVER PZ3 X 150
THSGDE215 (1)	SCWDRV FLATTIP ELECMINI
THSGDE220 (1)	SCWDRV FLATTIP ELECMINI
THSGDE225 (1)	SCWDRV FLATTIP ELECMINI
THSGDE230 (1)	SCWDRV FLATTIP ELECMINI
THSGDEP20 (1)	SCWDRV FLATTIP ELECMINI
THSGDEP200 (1)	SCWDRV FLATTIP ELECMINI
THSGHF614BR (1)	FILE HANDLE
THSGHF615BR (1)	FILE HANDLE
THSHD2AR (1)	7/32 TIP FLAT SD ROTATE
THSHD4AR (1)	1/4 TIP FLAT SD ROTATE T
THSHD6AR (1)	5/16 TIP FLAT SD ROTATE
THSHD8AR (1)	3/8 TIP FLAT SD ROTATE T
THSHDP31AIRR (1)	NO1 TIP SD ROTATE TAB
THSHDP42AIRR (1)	NO2 TIP SD ROTATE TAB
THSHDP63AIRR (1)	NO3 TIP SD ROTATE TAB
THSHDP64AIRR (1)	NO4 TIP SD ROTATE TAB
THSN15 (1)	BREAKER BAR
THSW121A (1)	SHALLOW SOCKET 12PT 1/2I
THSW141A (1)	SHALLOW SOCKET 12PT 1/2I
THSW161A (1)	SHALLOW SOCKET 12PT 1/2I
THSW181A (1)	SHALLOW SOCKET 12PT 1/2I
THSW201 (1)	SHALLOW SOCKET 12PT 1/2I
THSW221 (1)	SHALLOW SOCKET 12PT 1/2I
THSW241 (1)	SHALLOW SOCKET 12PT 1/2I
THSW261 (1)	SHALLOW SOCKET 12PT 1/2I
THSW281 (1)	SHALLOW SOCKET 12PT 1/2I
THSW301 (1)	SHALLOW SOCKET 12PT 1/2I
THSW321 (1)	SHALLOW SOCKET 12PT 1/2I
THSW341 (1)	SHALLOW SOCKET 12PT 1/2I
THSW361 (1)	SHALLOW SOCKET 12PT 1/2I
THSW381 (1)	SHALLOW SOCKET 12PT 1/2I
THSW401 (1)	SHALLOW SOCKET 12PT 1/2I
THSWM101A (1)	SHALLOW SKT METRIC 12PT
THSWM111A (1)	SHALLOW SKT METRIC 12PT

Item (Qty)	Description
THSWM121A (1)	SHALLOW SKT METRIC 12PT
THSWM131A (1)	SHALLOW SKT METRIC 12PT
THSWM141A (1)	SHALLOW SKT METRIC 12PT
THSWM171 (1)	SHALLOW SKT METRIC 12PT
THSWM191 (1)	SHALLOW SKT METRIC 12PT
THSWM221 (1)	SHALLOW SKT METRIC 12PT
THSWM241 (1)	SHALLOW SKT METRIC 12PT
THSWM271 (1)	SOCKET 27MM X 1/2IN DR
THSWM301 (1)	SOCKET 30MM X 1/2IN DR
THSWM321 (1)	SOCKET 32MM X 1/2IN DR
THSXK11 (2)	EXTENSION 1/2 DR
THSXK5 (2)	EXTENSION 1/2IN DR
THTOOLPOUCH (1)	TOOL POUCH SS HOOKS NO F
THUNI15 (2)	UNIVERSAL TETHER
THUNI6 (3)	UNIVERSAL TETHER
THUNI6CLIP25 (2)	UNIVERSAL LANYARD CLIP B
THUNIRET1 (2)	16OZ RETRACTABLE WRIST L
THUNIRET2 (2)	32OZ RETRACTABLE WRIST L
THUTK100 (1)	RETRACTABLE KNIFE
THWS1 (3)	WRIST STRAP W/SST D-RING
THWSRET1 (2)	RETRACTABLE TETHER
THWTR1A (1)	WIRE TWISTER
THXB1214A (1)	BOXOCKET
THXB1618A (1)	BOXOCKET
THXB2022A (1)	BOXOCKET
THXB2426A (1)	BOXOCKET
THXB2830A (1)	BOXOCKET
THXB3234A (1)	BOXOCKET
THXB4042A (1)	BOXOCKET
THXBM1113A (1)	TH DOUBLE BOX WR 11-13MM
THXBM1214A (1)	TH DOUBLE BOX WR 12-14MM
THXBM1315A (1)	TH DOUBLE BOX WR 13-15MM
THXBM1417A (1)	TH DOUBLE BOX WR 14-17MM
THXBM1618A (1)	TH DOUBLE BOX WR 16-18MM
THXBM1719A (1)	TH DOUBLE BOX WR 17-19MM
THXBM1821A (1)	TH DOUBLE BOX WR 18-21MM
THXBM2224A (1)	TH DOUBLE BOX WR 22-24MM
THXBM2730A (1)	TH DOUBLE BOX WR 27-30MM
THXBM810A (1)	TH DOUBLE BOX WR 8-10MM
THXID1618A (1)	BOXOCKET
THXID2022A (1)	BOXOCKET
THXOM10kV (1)	1000V INSULATED WRENCH 1
THXOM11kV (1)	1000V INSULATED WRENCH 1
THXOM12kV (1)	1000V INSULATED WRENCH 1
THXOM13kV (1)	1000V INSULATED WRENCH 1
THXOM14kV (1)	1000V INSULATED WRENCH 1
THXOM15kV (1)	1000V INSULATED WRENCH 1
THXOM16kV (1)	1000V INSULATED WRENCH 1
THXOM17kV (1)	1000V INSULATED WRENCH 1
THXOM18kV (1)	1000V INSULATED WRENCH 1
THXOM19kV (1)	1000V INSULATED WRENCH 1
THXOM6kV (1)	1000V INSULATED WRENCH 6
THXOM7kV (1)	1000V INSULATED WRENCH 7
THXOM8kV (1)	1000V INSULATED WRENCH 8
THXOM9kV (1)	1000V INSULATED WRENCH 9
THXSM67A (1)	WRENCH BOX OFFSET 5-7MM
THYA728A (1)	GREASE GUN
UKBU10 (1)	BLADES FOR UTILITY KNIFE
VFI11005PNP (1)	CUSTOM FOAM BLACK/ YELLOW
UKBU10 (1)	BLADES FOR UTILITY KNIFE
VFI11005PNP (1)	CUSTOM FOAM BLACK/ YELLOW

THKITUS500B

Item (Qty)	Description
8MA (1)	FILE MILL 8IN
8R (1)	FILE ROUND 8IN
AWSG06 (1)	T HANDLE HEX 3/32
AWSG07 (1)	T HANDLE HEX 7/64
AWSG08 (1)	T HANDLE HEX 1/8
AWSG09 (1)	T HANDLE HEX 9/64
AWSG10 (1)	T HANDLE HEX 5/32
AWSG12 (1)	T HANDLE HEX 3/16
AWSG14 (1)	T HANDLE HEX 7/32
AWSG16 (1)	T HANDLE HEX 1/4
AWSG20 (1)	T HANDLE HEX 5/16
AWSG24 (1)	T HANDLE HEX 3/8
AWSGM10 (1)	T HANDLE HEX 10
AWSGM2 (1)	T HANDLE HEX 2
AWSGM2.5 (1)	T HANDLE HEX 2.5
AWSGM3 (1)	T HANDLE HEX 3
AWSGM4 (1)	T HANDLE HEX 4
AWSGM5 (1)	T HANDLE HEX 5
AWSGM6 (1)	T HANDLE HEX 6
AWSGM8 (1)	T HANDLE HEX 8
C59AHLP (1)	CMPOSITE LINEMAN
KRA4107FPJK (1)	7 DRAWER RC ORANGE
PPC103A (1)	PUNCH
PPC104A (1)	PIN PUNCH
PPC105A (1)	PIN PUNCH
PPC106A (1)	PIN PUNCH
PPC107A (1)	PIN PUNCH
PPC108A (1)	PUNCH
PPC110A (1)	PUNCH
PPC832B (1)	CHISEL
PYTBKT250HLV (1)	Durahide lift bucket
PYTLOOP10PK (1)	Web strap belt loop with
PYTPCHPARTS (1)	SMALL PARTS POUCH BELT
PYTUTILXL (1)	Tool Belt
TH388CF (1)	CUTTERS DIAGONAL,200MM
TH85BCP (1)	CUTTERS DIAGNL 4-7/8 VIN
TH95BCP (1)	PLIER NEEDLE NSE 6IN VIN
THA2A (2)	3/8-1/2IN STEP UP ADAPTO
THAWP120 (1)	PLIERS,WATERPUMP,250MM
THBC110B (1)	HAMMER,DEADBLOW 8LB 30IN
THBD10ESG (1)	HAMMER,10LB 30IN BLUE HA
THBD6ESG (1)	HAMMER,6LB 16IN HANDLE
THBPN32B (1)	HAMMER,BALL/P 32OZ
THCARA15 (3)	2 SST CARABINER TETHER
THCARA25 (2)	2 SST CARABINER TETHER
THCSA12C (1)	SCRAPER
THF081 (1)	SHALLOW SOCKET 12PT 3/8
THF101 (1)	SHALLOW SOCKET 12PT 3/8
THF80 (1)	3/8 RATCHET
THFA10E (1)	HEX DRIVER 3/8 DR
THFA12E (1)	HEX DRIVER 3/8 DR
THFA8E (1)	HEX DRIVER 3/8 DR
THFAM4E (1)	HEX DRIVER 3/8 DR
THFAM5E (1)	HEX DRIVER 3/8 DR
THFSM61 (1)	SOCKET 6MMx3/8IN DRIVE
THFSM71 (1)	SOCKET 7MMx3/8IN DRIVE

Item (Qty)	Description
THGAJ10 (2)	ADJ WRN 10IN
THGAJ18 (2)	ADJ WRN 18IN
THGSAF1F (2)	1/2IN-3/8IN ADAPTOR
THHSG319 (1)	HACKSAW
THL1 (4)	LANYARD W/TWO SST SNAP H
THL2 (10)	Lanyard with SST snap ho
THLP10WR (1)	PLIERS VISE-GRP LOCKJAW
THNPB124B (1)	WRECKING BAR
THPPC5A (1)	PUNCH CHISEL HOLDER
THPRT (3)	Aluminim pin release too
THPW10C (1)	PIPE WR 34022
THPWA24A (2)	WRENCH PIPE,EXT.24IN ALU
THPWCS9 (1)	WIRE STRIPPER
THQD3R250 (1)	TORQWRNCH CLICK 50-250FT
THRXFMS1012B (1)	WRENCH
THRXFMS1314B (1)	WRENCH
THRXFMS1517B (1)	WRENCH
THRXFMS1618B (1)	WRENCH
THRXFMS1921B (1)	WRENCH
THRXFMS911B (1)	WRENCH
THS8 (1)	UNIVERSAL JOINT 1/2IN DR
THS80A (2)	TAH 1/2IN RATCHET
THSA14E (1)	HEX DRIVER 1/2 DR
THSA16E (1)	HEX DRIVER 1/2 DR
THSA18E (1)	HEX DRIVER 1/2 DR
THSA20E (1)	HEX DRIVER 1/2 DR
THSA24E (1)	HEX DRIVER 1/2 DR
THSAM10E (1)	HEX DRIVER METRIC 1/2 DR
THSAM12E (1)	HEX DRIVER METRIC 1/2 DR
THSAM14E (1)	HEX DRIVER METRIC 1/2 DR
THSAM17E (1)	HEX DRIVER METRIC 1/2 DR
THSAM6E (1)	HEX DRIVER METRIC 1/2 DR
THSAM8E (1)	HEX DRIVER METRIC 1/2 DR
THSGDE215 (1)	SCWDRV FLATTIP ELECMINI
THSGDE220 (1)	SCWDRV FLATTIP ELECMINI
THSGDE225 (1)	SCWDRV FLATTIP ELECMINI
THSGDE230 (1)	SCWDRV FLATTIP ELECMINI
THSGDEP20 (1)	SCWDRV FLATTIP ELECMINI
THSGDEP200 (1)	SCWDRV FLATTIP ELECMINI
THSGHF614BR (1)	FILE HANDLE
THSGHF615BR (1)	FILE HANDLE
THSHD2AR (1)	7/32 TIP FLAT SD ROTATE
THSHD4AR (1)	1/4 TIP FLAT SD ROTATE T
THSHD6AR (1)	5/16 TIP FLAT SD ROTATE
THSHD8AR (1)	3/8 TIP FLAT SD ROTATE T
THSHDP31AIRR (1)	NO1 TIP SD ROTATE TAB
THSHDP42AIRR (1)	NO2 TIP SD ROTATE TAB
THSHDP63AIRR (1)	NO3 TIP SD ROTATE TAB
THSHDP64AIRR (1)	NO4 TIP SD ROTATE TAB
THSN15 (1)	BREAKER BAR
THSW121A (1)	SHALLOW SOCKET 12PT 1/2I
THSW141A (1)	SHALLOW SOCKET 12PT 1/2I
THSW161A (1)	SHALLOW SOCKET 12PT 1/2I
THSW181A (1)	SHALLOW SOCKET 12PT 1/2I
THSW201 (1)	SHALLOW SOCKET 12PT 1/2I
THSW221 (1)	SHALLOW SOCKET 12PT 1/2I

Item (Qty)	Description
THSW241 (1)	SHALLOW SOCKET 12PT 1/2I
THSW261 (1)	SHALLOW SOCKET 12PT 1/2I
THSW281 (1)	SHALLOW SOCKET 12PT 1/2I
THSW301 (1)	SHALLOW SOCKET 12PT 1/2I
THSW321 (1)	SHALLOW SOCKET 12PT 1/2I
THSW341 (1)	SHALLOW SOCKET 12PT 1/2I
THSW361 (1)	SHALLOW SOCKET 12PT 1/2I
THSW381 (1)	SHALLOW SOCKET 12PT 1/2I
THSW401 (1)	SHALLOW SOCKET 12PT 1/2I
THSWM101A (1)	SHALLOW SKT METRIC 12PT
THSWM111A (1)	SHALLOW SKT METRIC 12PT
THSWM121A (1)	SHALLOW SKT METRIC 12PT
THSWM131A (1)	SHALLOW SKT METRIC 12PT
THSWM141A (1)	SHALLOW SKT METRIC 12PT
THSWM171 (1)	SHALLOW SKT METRIC 12PT
THSWM191 (1)	SHALLOW SKT METRIC 12PT
THSWM221 (1)	SHALLOW SKT METRIC 12PT
THSWM241 (1)	SHALLOW SKT METRIC 12PT
THSWM271 (1)	SOCKET 27MM X 1/2IN DR
THSWM301 (1)	SOCKET 30MM X 1/2IN DR
THSWM321 (1)	SOCKET 32MM X 1/2IN DR
THSXK11 (2)	EXTENSION 1/2 DR
THSXK5 (2)	EXTENSION 1/2IN DR
THTOOLPOUCH (1)	TOOL POUCH SS HOOKS NO F
THUNI15 (2)	UNIVERSAL TETHER
THUNI6 (2)	UNIVERSAL TETHER
THUNI6CLIP25 (1)	UNIVERSAL LANYARD CLIP B
THUNIRET1 (2)	16OZ RETRACTABLE WRIST L
THUNIRET2 (2)	32OZ RETRACTABLE WRIST L
THUTK100 (1)	RETRACTABLE KNIFE
THWS1 (2)	WRIST STRAP W/SST D-RING
THWSRET1 (2)	RETRACTABLE TETHER
THWTR1A (1)	WIRE TWISTER
THXB1214A (1)	BOXOCKET
THXB1618A (1)	BOXOCKET
THXB2022A (1)	BOXOCKET
THXB2426A (1)	BOXOCKET
THXB2830A (1)	BOXOCKET
THXB3234A (1)	BOXOCKET
THXB4042A (1)	BOXOCKET
THXBM1113A (1)	TH DOUBLE BOX WR 11-13MM
THXBM1214A (1)	TH DOUBLE BOX WR 12-14MM
THXBM1315A (1)	TH DOUBLE BOX WR 13-15MM
THXBM1417A (1)	TH DOUBLE BOX WR 14-17MM
THXBM1618A (1)	TH DOUBLE BOX WR 16-18MM
THXBM1719A (1)	TH DOUBLE BOX WR 17-19MM
THXBM1821A (1)	TH DOUBLE BOX WR 18-21MM
THXBM2224A (1)	TH DOUBLE BOX WR 22-24MM
THXBM2730A (1)	TH DOUBLE BOX WR 27-30MM
THXBM810A (1)	TH DOUBLE BOX WR 8-10MM
THXID1618A (1)	BOXOCKET
THXID2022A (1)	BOXOCKET
THXSM67A (1)	WRENCH BOX OFFSET 5-7MM
THYA728A (1)	GREASE GUN
VFI11005PNP (1)	CUSTOM FOAM BLACK/YELLOW

THKITM1000V

Item (Qty)	Description
EEDM525E (1)	DIGITAL MULTIMETER
KRA4114FPJK (1)	YELLOW 4 DR TOP BOX
PYTBKT250HLV (1)	250 LB CAPACITY LIFT BUCK
PYTEXT5X12 (1)	WEB LANYARD 12"
PYTEXT5X24 (1)	WEB LANYARD 24"
PYTEXT5X36 (1)	WEB LANYARD 36"
PYTINSPECT (1)	METER POUCH
TH1000VFOAM (1)	FOAM
TH2619kV (1)	1000V 9"/250MM WATERPUMP
TH497CFkV (1)	1000V 90DEG BENT-NOSE PLI
TH57AHLPkV (1)	1000V 7"/190MM LINESMAN P
TH59AHLPkV (1)	1000V 9"/235MM LINESMAN P
TH807kV (1)	1000V WIRE-STRIPPING PLIE
TH84CFkV (1)	1000V DIAG CUTTERS 4"/120
TH862kV (1)	1000V INS. HACKSAW 12"
TH863kV (1)	1000V INS. JUNIOR HACKSAW
TH87CFkV (1)	1000V 7"/190MM DIAG CUTTE
TH91ACPkV (1)	1000V 9"/235MM ADJUSTABLE
TH95CFkV (1)	1000V 5"/150MM NEEDLE NOS
THAD12AkV (1)	1000V 12" ADJUSTABLE WR.
THAD6AkV (1)	1000V 6" ADJUSTABLE WR.
THAWMCG10kV (1)	1000V INS. T-HND HEX WR.
THAWMCG3kV (1)	1000V INS. T-HND HEX WR.
THAWMCG4kV (1)	1000V INS. T-HND HEX WR.
THAWMCG5kV (1)	1000V INS. T-HND HEX WR.
THAWMCG6kV (1)	1000V INS. T-HND HEX WR.

Item (Qty)	Description
THAWMCG8kV (1)	1000V INS. T-HND HEX WR.
THCARA15 (1)	3/4" SUPER COIL PERSONAL
THHBPT16kV (1)	1000V INS. HAMMER, 24OZ,
THOEM10kV (1)	1000V INS. WR. 10MM O/E
THOEM11kV (1)	1000V INS. WR. 11MM O/E
THOEM12kV (1)	1000V INS. WR. 12MM O/E
THOEM13kV (1)	1000V INS. WR. 13MM O/E
THOEM14kV (1)	1000V INS. WR. 14MM O/E
THOEM15kV (1)	1000V INS. WR. 15MM O/E
THOEM16kV (1)	1000V INS. WR. 16MM O/E
THOEM17kV (1)	1000V INS. WR. 17MM O/E
THOEM18kV (1)	1000V INS. WR. 18MM O/E
THOEM19kV (1)	1000V INS. WR. 19MM O/E
THOEM6kV (1)	1000V INS. WR. 6MM O/E
THOEM7kV (1)	1000V INS. WR. 7MM O/E
THOEM8kV (1)	1000V INS. WR. 8MM O/E
THOEM9kV (1)	1000V INS. WR. 9MM O/E
THPWC14kV (1)	1000V WIRE STRIPPER/CUTTE
THPWC80kV (1)	1000V 7"/190MM CABLE CUTT
THSD869kV (1)	1000V S/DRIVER 0.5 X 3.5
THSD870kV (1)	1000V S/DRIVER 0.8 X 4 X
THSD871kV (1)	1000V S/DRIVER 1.0 X 5 X
THSD872kV (1)	1000V S/DRIVER 1.2 X 6.5
THSD873kV (1)	1000V S/DRIVER 1.2 X 8 X
THSD874kV (1)	1000V S/DRIVER 1.6 X 10
THSDP875kV (1)	1000V S/DRIVER PH1 X 75MM

Item (Qty)	Description
THSDP876kV (1)	1000V S/DRIVER PH2 X 100M
THSDP877kV (1)	1000V S/DRIVER PH3 X 150M
THSDZ878kV (1)	1000V S/DRIVER PZ1 X 75MM
THSDZ879kV (1)	1000V S/DRIVER PZ2 X 100M
THSDZ880kV (1)	1000V S/DRIVER PZ3 X 150M
THTOOLPOUCH (1)	POUCH
THUNI6 (2)	TETHER
THUNI6CLIP25 (1)	LOOP CLIPS (25)
THUTK100 (1)	UTILITY KNIFE NON-INS.
THWS1 (2)	VELCRO WRIST STRAP WITH D
THXOM10kV (1)	1000V INS. WR. 10MM RING
THXOM11kV (1)	1000V INS. WR. 11MM RING
THXOM12kV (1)	1000V INS. WR. 12MM RING
THXOM13kV (1)	1000V INS. WR. 13MM RING
THXOM14kV (1)	1000V INS. WR. 14MM RING
THXOM15kV (1)	1000V INS. WR. 15MM RING
THXOM16kV (1)	1000V INS. WR. 16MM RING
THXOM17kV (1)	1000V INS. WR. 17MM RING
THXOM18kV (1)	1000V INS. WR. 18MM RING
THXOM19kV (1)	1000V INS. WR. 19MM RING
THXOM6kV (1)	1000V INS. WR. 6MM RING
THXOM7kV (1)	1000V INS. WR. 7MM RING
THXOM8kV (1)	1000V INS. WR. 8MM RING
THXOM9kV (1)	1000V INS. WR. 9MM RING
UKBU10 (1)	BLADES FOR UTILITY KNIFE
UKBU10 (1)	BLADES FOR UTILITY KNIFE

⚠ WARNING

- Be sure to use a lanyard that has more weight capacity than the tool you are attaching because drop forces are greater than actual tool weight.
- Any tool that weighs more than 5 pounds should be attached to an anchor point such as a work platform or utility bucket rather than the operator.

LANYARDS

TOOLS@HEIGHT CARABINER

Made of Stainless Steel or Aluminum to withstand corrosive environments

Carabiners, triggers, and clips cannot be removed from lanyards for an extra measure of safety

Load rated carabiners for safety and durability

Screw gate locking mechanisms provide positive retention

COMPETITIVE CARABINER

Carabiners, triggers, and clips can easily be removed from lanyards

Not load rated

No screw gate to provide positive retention

PYTH2L1X72HD

PYTH2R1X72HD

PYTH2L1X72MD

PYTH2LBUNMD

THCARA30

THCARA25

THCARA15

THUNI15

THUNI12

Lanyards

Stock No.	Description	Load Rating lbs (kgs)	Extension Length (Inches)	Retracted Length (Inches)	Qty
PYTH2L1X72HD	Carabiner to loop web lanyard, Heavy Duty	80 (36)	72	n/a	1
PYTH2R1X72HD	Carabiner to rail hook web lanyard, Heavy Duty	80 (36)	72	n/a	1
PYTH2L1X72MD	Carabiner to loop web lanyard, Medium Duty	35 (16)	72	n/a	1
PYTH2LBUNMD	Carabiner to loop bungee lanyard, Medium Duty	35 (16)	49	30	1
THCARA30	SST Carabiner to carabiner bungee lanyard, Medium Duty	30 (14)	40	18	1
THCARA25	SST Carabiner to carabiner bungee lanyard, Medium Duty	25 (11)	124	37-45	1
THCARA15	SST Carabiner to carabiner bungee lanyard, Standard Duty	15 (7)	47	27	1
THUNI15	SST Carabiner to loop bungee lanyard, Standard Duty	15 (7)	50	30	1
THUNI12	SST Carabiner to loop bungee lanyard, Standard Duty	12 (5)	124	37-45	1



PYTH2LBUNGEE

PYTEXT5X12

PYTEXT5X24

PYTEXT5X36

THUNI5

THL1

THL2

THANCHOR

Lanyards and Anchor Straps

Stock No.	Description	Load Rating lbs (kgs)	Extension Length (Inches)	Retracted Length (Inches)	Qty
PYTH2LBUNGEE	Carabiner to loop bungee lanyard, Standard Duty	10 (5)	47	31	1
PYTH2LBUN10P	Carabiner to loop bungee lanyard, Standard Duty 10 pack	10 (5)	47	31	10
PYTEXT5X12	Trigger to trigger web lanyard, Standard Duty	10 (5)	12	n/a	1
PYTT2T051210	Trigger to trigger web lanyard, Standard Duty 10 pack	10 (5)	12	n/a	10
PYTEXT5X24	Trigger to trigger web lanyard, Standard Duty	10 (5)	24	n/a	1
PYT5X2410PK	Trigger to trigger web lanyard, Standard Duty 10 pack	10 (5)	24	n/a	10
PYTEXT5X36	Trigger to trigger web lanyard, Standard Duty	10 (5)	36	n/a	1
PYT05X3610PK	Trigger to trigger web lanyard, Standard Duty 10 pack	10 (5)	36	n/a	10
THUNI5	SST Carabiner to loop bungee lanyard, Personal Duty	5 (2)	53	33	1
THL1	SST Clip to clip web lanyard, Personal Duty	5 (2)	14	n/a	1
THL2	SST Clip to loop w/barrell lock lanyard, Personal Duty	5 (2)	14	n/a	1
THANCHOR	Anchor Strap	25 (11)	n/a	n/a	1

⚠ WARNING

- Be sure to use a lanyard that has more weight capacity than the tool you are attaching because drop forces are greater than actual tool weight.
- Any tool that weighs more than 5 pounds should be attached to an anchor point such as a work platform or utility bucket rather than the operator.

TETHERS

PHYTH2HCOIL

PYTT2TCOIL

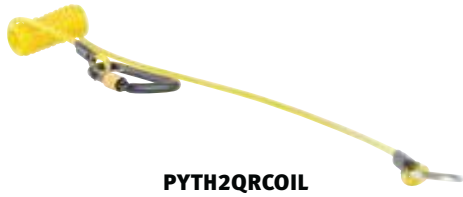

PYTH2QRCOIL

PYTC2CCOIL10

PYTC2LCOIL10

PYTHARDH10PK

Coil Tethers

Stock No.	Description	Load Rating lbs (kgs)	Extension Length (Inches)	Retracted Length (Inches)	Qty
PHYTH2HCOIL	Patented carabiner to carabiner vinyl coated braided steel tether, Personal Duty	5 (2)	67.5	16.5	1
PYTH2HCOIL10	Carabiner to carabiner vinyl coated braided steel tether, Personal Duty 10 pack	5 (2)	67.5	16.5	10
PYTT2TCOIL	Trigger to Trigger tether, Personal Duty	5 (2)	30	9	1
PYTT2TCOIL10	Trigger to Trigger tether, Personal Duty 10 pack	5 (2)	30	9	10
PYTH2QRCOIL	Caraibiner to quick ring tether, Personal Duty	2 (1)	65.5	25	1
PYTH2QR10PK	Caraibiner to quick ring tether, Personal Duty 10 pack	2 (1)	65.5	25	10
PYTC2CCOIL10	Clip to clip tether, Personal Duty 10 pack	2 (1)	44	9	10
PYTC2LCOIL10	Clip to side release loop tether, Personal Duty 10 pack	2 (1)	45.25	10	10
PYTHARDH10PK	Clip to loop hard hat tether 10 pack	2 (1)	44.5	12	10
PYTHARDH100	Clip to loop hard hat tether 100 pack	2 (1)	44.5	12	100

THUNIRET2

THRET2CLIP25

THWSRET1

THUNIRET1

THRET1CLIPS

Retractable Tethers

Stock No.	Description	Load Rating lbs (kgs)	Extension Length (Inches)	Retracted Length (Inches)	Qty
THUNIRET2	Self flushing retractable tether with disconnectable loop	2 (1)	42	17	1
THRET2CLIP25	25 pack of disconnectable clips/loop for THUNIRET2	2 (1)	n/a	8	25
THUNIRET1	Self flushing retractable tether with disconnectable loop	1 (.5)	36	14	1
THRET1CLIP25	25 pack of disconnectable clips/loop for THUNIRET1 and THWSRET1	1 (.5)	n/a	7 ¾	25
THWSRET1	Adjustable wrist strap with self flushing retractable tether and disconnectable loop	1 (.5)	49	10	1

Pullaway Wristbands

- Pullaway wristbands are designed so that they can be escaped from in emergency situations
- Pullaway Wristbands feature an elastic strap that conform to the users wrist size automatically.

Stock No.	Size	Load Rating lbs (kgs)	Qty
PYTWBS	Small	5 (2)	1
PYTWBS10PK	Small	5 (2)	10
PYTWBM	Medium	5 (2)	1
PYTWBM10PK	Medium	5 (2)	10
PYTWBL	Large	5 (2)	1
PYTWBL10PK	Large	5 (2)	10
PYTWBSLIMS10	Slim / Small	5 (2)	10
PYTWBSLIMM10	Slim / Medium	5 (2)	10
PYTWBSLIML10	Slim / Large	5 (2)	10

PYTWB-S

PYTWBM

PYTWBL

PYTWBSLIMS10

Adjustable Wristbands

- Adjustable Wristbands can be sized to virtually any wrist size with Hook and Loop closure straps

Stock No.	Load Rating lbs (kg)	Qty
THWS1	5 (2)	1
PYTWBADJ	5 (2)	1
PYTWBADJ10PK	5 (2)	10
PYTADJCORD	5 (2)	1
PYTADJCRD10P	5 (2)	10
PYWBADJR	1.5 (.7)	1
PYTWBADJR10	1.5 (.7)	10
THWSRET1	1 (.5)	1

Tools not included with Wristbands

THWS1

PYTADJCORD

PYTWBADJ

PYTWBADJR

THWSRET1

⚠ WARNING

- Be sure to use a lanyard that has more weight capacity than the tool you are attaching because drop forces are greater than actual tool weight.
- Any tool that weighs more than 5 pounds should be attached to an anchor point such as a work platform or utility bucket rather than the operator.

HOLSTERS

PYTADJRADCOM

PYTBOTTLE

PYTHAMMERCOM

PYTITOOBLTR

PYTITOOLHAR

PYTITOOLXD

PYT2TOOBLTR

PYTHOL2H

PYTPOUCHRET

PYTSCAFFRET

PYTTAPECOMBO

PYTR52STEEL

Tool Holsters

Stock No.	Description
PYTADJRADIO†	Adjustable Radio Holster
PYTADJRADCOM	Adjustable Radio Holster Combo (includes EXT-C2LCOIL)
PYTBOTTLE	Bottle / Spray Can Holster
PYTBOTTLECOM	Bottle / Spray Can Holster Combo (Includes EXT-C2CCOIL)
PYTHOLHAMMER†	Hammer Holster
PYTHAMMERCOM	Hammer Holster Combo (Includes EXT-H2QRCOIL)
PYT1TOOLBLT	Single Tool Belt Holster
PYT1TOOLBLTR†	Single Tool Belt Holster with Retractor
PYT1TOOLHAR	Single Tool Harness Holster
PYTHOL1HR†	Single Tool Harness Holster with Retractor
PYT1TOOLXD†	Extra-Deep Single Tool Holster
PYTHOL2B	Dual Tool Belt Holster
PYT2TOOLBLTR†	Dual Tool Belt Holster with Retractors

Stock No.	Description
PYTHOL2H	Dual Tool Harness Holster
PYTHOL2HR†	Dual Tool Harness Holster with Retractors
PYTPOUCHRET†	Pouch Holster with Retractor
PYTSCAFFRET†	Scaffold Wrench Holster with Retractor
PYTSCAFFCOMB	Scaffold Wrench Holster with Retractor Combo (Includes EXT-H2LBUNGEE)
PYTTAPERET†	Tape Measure Holster with Retractor
PYTTAPESLEEV†	Tape Measure Sleeve
PYTTAPECOMBO	Tape Measure Holster with Retractor Combo (Includes HOL-TAPESLEEVE)
PYTR52STEEL	52" Steel Cable Retractor with Polycarbonate Body

* Tool Lanyards not included with Tool Holsters unless otherwise stated.

** Tools not included with Tool Holsters.

†Patent Pending

Small Parts Pouch

- The patented Small Parts Pouch stops accidental drops with an innovative self-closure system that traps objects inside making it nearly impossible for objects to fall out once placed in the bag.
- Easy to retrieve objects since no opening or closing is necessary.
- Available in several colors, and a vinyl variant.
- Extra-deep Small Parts Pouch is also available for extra storage space.

Stock No.	Description
PYTPARTSCB	Small Parts Pouch - Canvas Black
PYTPARTSCC	Small Parts Pouch - Canvas Camo
PYTPCHPARTS	Small Parts Pouch - Canvas Orange
PYTPARTSVY	Small Parts Pouch - Vinyl Yellow
PYTPARTSXDCB	Small Parts Pouch Extra-Deep - Canvas Black

PYTPARTSCC

PYTPCHUTILIT Utility Pouch

- Two welded D-Rings on front of pouch to tie off tools.
- One additional D-Ring inside pouch.
- Two inner pouch pockets for storing tools.
- Belt loop on back of pouch.
- Two side ears are perfect for holding spud wrenches and sleever bars.
- Drain vent on the bottom of the pouch.

PYTPCHUTILIT

PYTINSPECT Inspection Pouch

- Designed for the safe transport and use of most multi-meters, air monitors, and other portable testing devices. A unique, patent pending adjustable opening can be used to create a hands-free work station off the hip or chest.
- Three tool pockets inside the pouch are perfect for tools and testing probes. Tools can be tied off to a D-Ring inside the pouch, or a D-Ring located on either side of the back of the pouch.
- The inspection pouch has been designed to be worn off the belt, or over the should with an included shoulder strap.

PYTINSPECT

Tool Pouches

Stock No.	Description
PYTPCHTOOL	Tool Pouch with D-Ring
PYTPCHTOOLR	Tool Pouch with D-Ring and Retractors
PYTTOOLTRIG	Tool Pouch with D-Ring and Triggers
PYTTOOLXD	Extra Deep Tool Pouch with D-Ring
PYTTOOLXDR	Extra Deep Tool Pouch with D-Ring and Retractors
PYTTOOLXDTRG	Extra Deep Tool Pouch with D-Ring and Triggers

PYTPCHTOOL

PYTTOOLXD

PYTH2LBUNGEE
SOLD SEPARATELY

⚠ WARNING

- Be sure to use a lanyard that has more weight capacity than the tool you are attaching because drop forces are greater than actual tool weight.
- Any tool that weighs more than 5 pounds should be attached to an anchor point such as a work platform or utility bucket rather than the operator.

TOOL BELTS / BELT LOOPS

PYTBELTCFTSM

Comfort Tool Belts

- A drop prevention tool belt system that's both durable and comfortable
- Modular design allowing the user to customize their own personal holster and pouch set up.

Stock No.	Waist Size (Inches)
PYTBELTCFTSM	28" - 36"
PYTBELTCFTLX	36" - 44"
PYTBELTCFT23	44" - 52"

PYTUTILSL

Utility Belts

- Utility tool belt features a high strength grommet closure system with padding inside two layers of cordura that provides for durability and comfort.

Stock No.	Waist Size (Inches)
PYTUTILSL	28" - 46"
PYTUTILXL	40" - 54"

PYBELTLOOP

PYTTRLOOP

Belt Loops

- Compatible with all tool belts above
- D-Ring Belt Loop Attachment creates an instant attachment point that is third-party load-rated for 5 lbs.
- Belt Loop Trigger creates an instant staging point that is third-party load-rated for 5 lbs. A thumb release steel trigger snap allows for quick tool transfers while maintaining a secure connection, even while wearing work gloves. Modular design allowing the user to customize their own personal holster and pouch set up.

Stock No.	Description	Load Rating lbs (kgs)	Qty
PYBELTLOOP	Belt Loop D-Ring	5 (2)	1
PYTLOOP10PK	Belt Loop D-Ring	5 (2)	10
PYTTRLOOP	Belt Loop Trigger	5 (2)	1
PYTTRLOOP10P	Belt Loop Trigger	5 (2)	10

Safe Buckets

- Every Safe Bucket is manufactured with either a hook and loop or drawstring closure system which helps prevent accidental drops.
- All Safe Buckets are third-party load rated.
- Sewn into the bottom of every Safe Bucket is hard composite plating that protects the bucket from accidental punctures. A protective leather sleeve covers the inserts that is resilient to the elements and harsh work environments.
- The Safe Bucket was engineered to be used with tools at height, and includes multiple connection points that can be tethered to. Workers can tether their tools directly to the Safe Bucket when being used, and store their tools for transport when finished.
- Instead of rope which is susceptible to fraying, a heavy-duty hoisting/shoulder strap is built into every Safe Bucket. Each bucket is also equipped with a high-quality and lightweight aluminum twist-lock carabiner load rated for 30 kN (6,700 lbs). There is no need to worry about a knot failing, or a non-locking carabiner which may slip off a connection point.
- Safe Buckets are 15 inches tall and have a 12.5 inch Diameter.

Stock No.	Closure System	Body Material	Load Rating lbs (kgs)
PYTBKT100HLC	Hook and Loop	Canvas	100 (45)
PYBKT100DRC	Drawstring	Canvas	100 (45)
PYTBKT250HLV	Hook and Loop	Vinyl	250 (113)
PYTBKT250DRV	Drawstring	Vinyl	250 (113)

PYTBKT100HLC

PYTBKT250DRV

PYBKTINSERT Hard Body Safe Bucket Insert

- The Hard Body Safe Bucket Insert converts the standard soft body Safe Bucket into a hard body bucket with four inner pockets for staging tools and small parts. The insert can be removed and reused, and is compatible with all standard Safe Buckets.

Tools not included

PYBKTINSERT

Extra Deep Safe Buckets

- Extra Deep Safe Buckets feature a hook and loop closure system allowing for the safe transport of scaffold poles and large tools, like torque wrenches
- Available in three different lengths.
- Third-party load rated for 100 pounds.
- A heavy duty webbing hoisting strap comes with a built in twist-lock aluminum carabiner for lifting.

Stock No.	Length (Inches)	Load Rating lbs (kgs)
PYTBKT1004	48	100 (45)
PYTBKT1006	72	100 (45)
PYTBKT10010	120	100 (45)

PYTBKT1004

⚠ WARNING

- Be sure to use a lanyard that has more weight capacity than the tool you are attaching because drop forces are greater than actual tool weight.
- Any tool that weighs more than 5 pounds should be attached to an anchor point such as a work platform or utility bucket rather than the operator.

RATCHETS & HANDLES

1/4" Drive

THT72

THTL72

THTHL72

THTHLF72

THTKN72

THTFY72

THTMS70A

THTMR4

THTMRT8

THTM77

THPRT

1/4" Drive Tools@Height Ratchets & Accessories

Stock No.	Description	Overall Length (Inches)	Repair Kit	Weight lbs (kg)
THT72	Ratchet, Sealed Head (High Strength), Standard Handle	4-7/16"	THRKRT72LB	0.20 (0.09)
THTL72	Ratchet, Sealed Head (High Strength), Long Handle	6-1/2"	THRKRT72LB	0.24 (0.11)
THTHL72	Ratchet, Sealed Head (High Strength), Long Handle, Soft Grip, Red	6-7/8"	THRKRT72LB	0.45 (0.2)
THTHLF72	Ratchet, Sealed Head, Long Flex Head, Soft Grip, Red	8-1/4"	THRKRT72LB	0.52 (0.24)
THTKN72	Ratchet, Round Head, Short Handle	3-1/16"	RKRTHNF72	0.28 (0.13)
THTHNF72	Ratchet, Round Head, Long Flex Head, Soft Grip	6-7/8"	RKRTHNF72	0.25 (0.11)
THTFY72	Ratchet, HI-Lok®, Flex Head	6-1/4"		0.3 (0.14)
THTMR4	Driver, Ratcheting	8-31/32"		0.25 (0.11)
THTMRT8	Driver, Ratcheting, T-Handle	10"		0.60 (0.27)
THTM77	Adaptor, Ratcheting	1-5/8"		0.12 (0.05)
THTMS70A	Spinner, Ratchet	2-7/32"		0.06 (0.03)
THRKRT7272LB	Drive gear and screws to retrofit existing 72 ratchets models	NA		0.2 (0.09)
THPRT	Pin Release Tool	-	-	-

THTM10G

THTM62B

THTM65

THT9TURBO

1/4" Drive Handles

Stock No.	Description	Overall Length (Inches)	Weight lbs (kg)
THTM10G	Breaker Bar	6"	0.18 (0.08)
THTM62B	Driver, Flexible, Standard Cable, Standard Handle	6-3/4"	0.20 (0.09)
THTM65	Adjusting Tool, Flexible	19-3/4"	0.50 (0.23)
THT9TURBO	T-Handle, Turbo Speed (Blue-Point)	9-3/16"	0.70 (0.32)

THTMX1

THTMU8B

THTMXK80

THTA3

THTMXM114

THTMXM17

1/4" Drive Tools@Height Extensions & Accessories

Stock No.	Description	Overall Length (inches)	Weight lbs (kg)
THTMXI	Extension	1"	0.03 (0.01)
THTMXK2	Knurled Extension	2"	0.06 (0.03)
THTMXK4	Knurled Extension	4"	0.10 (0.05)
THTMXK60	Knurled Extension	6"	0.14 (0.06)
THTMXK80	Knurled Extension	8"	0.17 (0.08)
THTMXKI IO	Knurled Extension	11"	0.25 (0.11)
THTMXK140	Knurled Extension	14"	0.30 (0.14)
THTMX240	Extension	24"	0.73 (0.33)
THTMU8B	Universal Joint	1-5/16"	0.04 (0.02)
THTA3	1/4" Female × 3/8" Male Adaptor	15/16"	0.05 (0.02)
THTMXM114	Adaptor, Magnetic, 1/4" Internal drive	1-17/32"	0.04 (0.02)
THTMXM17	Adaptor, Magnetic, 1/4" Internal drive	1-21/32"	0.04 (0.02)

THTMMD14

Shallow, mm

mm	12	A	B	C	D	E	Weight lbs (kg)
5	THTMMD5*	7.7	12.1	13.3	22.2	4.3	0.023 (0.01)
5.5	THTMMD5.5	8.3	12.1	13.3	22.2	4.6	0.02 (0.01)
6	THTMMD6	9.3	12.1	13.3	22.2	5.6	0.02 (0.01)
7	THTMMD7	10.5	12.1	13.3	22.2	6.1	0.02 (0.01)
8	THTMMD8	11.5	12.1	13.3	22.2	6.9	0.02 (0.01)
9	THTMMD9	12.7	12.1	13.3	22.2	7.4	0.024 (0.01)
10	THTMMD10	13.2	13.2	13.3	22.2	7.4	0.05 (0.02)
11	THTMMD11	15.2	14.6	13.3	22.2	9.4	0.065 (0.03)
12	THTMMD12	16.5	15.6	13.3	22.2	9.4	0.04 (0.02)
13	THTMMD13	17.6	16.7	13.3	22.2	9.4	0.05 (0.02)
14	THTMMD14	18.8	17.8	14.1	22.2	9.7	0.05 (0.02)

*Conventional hex

THTM16

Shallow, inches

11	6	12	A	B	C	D	E	Weight, lbs (kg)
1/8	THTM04	–	7/32	7/16	1/2	7/8	1/8	0.02 (0.01)
5/32	THTM05*	–	9/32	15/32	1/2	7/8	5/32	0.021 (0.01)
3/16	THTM6*	THTMD6*	9/32	15/32	1/2	7/8	5/32	0.022 (0.01)
7/32	THTM7*	THTMD7*	11/32	15/32	1/2	7/8	3/16	0.02 (0.01)
1/4	THTM8	THTMD8	3/8	15/32	1/2	7/8	7/32	0.02 (0.01)
9/32	THTM9	THTMD9	13/32	15/32	1/2	7/8	1/4	0.02 (0.01)
5/16	THTM10	THTMD10	15/32	15/32	1/2	7/8	9/32	0.03 (0.01)
11/32	THTM11	THTMD11	1/2	15/32	5/16	7/8	9/32	0.025 (0.01)
3/8	THTM12	THTMD12	17/32	1/2	1/2	7/8	9/32	0.03 (0.01)
7/16	THTM14	THTMD14	19/32	9/16	1/2	7/8	3/8	0.03 (0.01)
1/2	THTM16	THTMD16	11/16	21/32	1/2	7/8	3/8	0.05 (0.02)
9/16	THTM18	THTMD18	25/32	23/32	1/2	29/32	3/8	0.06 (0.03)

*Conventional hex



Snap-on T@H sockets, extensions, and adaptors feature a locking hole on all four sides, not just one. T@H ratchets and drive tools feature a locking pin which mates with the side lock hole for positive retention. This reduces the risk of misaligning the socket that typical competitor's sockets with just one side hole create.

Release pin with THPRT – Pin Release Tool for Square Drive Tools

Do not use quick release tools with locking collars or push button release. These tools can be disengaged inadvertently.

THPRT

⚠ WARNING

- Be sure to use a lanyard that has more weight capacity than the tool you are attaching because drop forces are greater than actual tool weight.
- Any tool that weighs more than 5 pounds should be attached to an anchor point such as a work platform or utility bucket rather than the operator.

SOCKETS

1/4" Drive



THTMMDS14

THTMDS16

Semi Deep, mm

mm	12	A	B	C	D	E	Weight, lbs (kg)
5	THTMMDS5*	7.7	12.1	22.9	31.8	5.1	0.03 (0.01)
5.5	THTMMDS5.5	8.3	12.1	22.9	31.8	5.3	0.03 (0.01)
6	THTMMDS6	9.3	12.1	22.9	31.8	5.8	0.03 (0.01)
7	THTMMDS7	10.5	12.1	22.9	31.8	6.1	0.05 (0.02)
8	THTMMDS8	11.5	12.1	18.4	31.8	6.9	0.40 (0.18)
9	THTMMDS9	12.7	12.1	18.4	31.8	7.4	0.045 (0.02)
10	THTMMDS10	14.0	13.2	18.4	31.8	7.4	0.05 (0.02)
11	THTMMDS11	15.4	14.6	18.4	31.8	9.4	0.06 (0.03)
12	THTMMDS12	16.5	15.6	18.4	31.8	9.4	0.06 (0.03)
13	THTMMDS13	17.6	16.7	18.4	31.8	9.4	0.08 (0.04)
14	THTMMDS14	18.8	17.8	18.4	31.8	9.7	0.08 (0.04)
15	THTMMDS15	20.4	19.4	18.4	31.8	9.7	0.10 (0.05)

*Conventional hex

THSTMMD14

Semi Deep, inches

11	12	A	B	C	D	E	Weight, lbs (kg)
3/16	THTMDS6*	5/16	15/32	29/32	1 1/4	7/32	0.03 (0.01)
7/32	THTMDS7*	11/32	15/32	29/32	1 1/4	7/32	0.03 (0.01)
1/4	THTMDS8	3/8	15/32	29/32	1 1/4	1/4	0.03 (0.01)
9/32	THTMDS9	13/32	15/32	23/32	1 1/4	1/4	0.03 (0.01)
5/16	THTMDS10	15/32	15/32	23/32	1 1/4	9/32	0.04 (0.02)
11/32	THTMDS11	1/2	15/32	23/32	1 1/4	5/16	0.04 (0.02)
3/8	THTMDS12	9/16	1/2	23/32	1 1/4	5/16	0.055 (0.02)
7/16	THTMDS14	5/8	19/32	23/32	1 1/4	3/8	0.05 (0.02)
1/2	THTMDS16	11/16	21/32	23/32	1 1/4	3/8	0.99 (0.45)
9/16	THTMDS18	3/4	23/32	23/32	1 1/4	3/8	0.085 (0.04)

*Conventional hex

THSTM16

Deep, mm

mm	12	A	B	C	D	E	Weight, lbs (kg)
5	THSTMMD5*	7.7	12.1	42.2	50.8	5.1	0.05 (0.02)
5.5	THSTMMD5.5	8.3	12.1	42.2	50.8	5.3	0.04 (0.02)
6	THSTMMD6	9.3	12.1	42.2	50.8	5.8	0.05 (0.02)
7	THSTMMD7	10.5	12.1	42.2	50.8	6.1	0.05 (0.02)
8	THSTMMD8	11.5	12.1	42.2	50.8	6.9	0.05 (0.02)
9	THSTMMD9	12.7	12.1	38.1	50.8	7.4	0.06 (0.03)
10	THSTMMD10	14.0	13.2	38.1	50.8	7.4	0.075 (0.03)
11	THSTMMD11	15.2	14.6	38.1	50.8	9.4	0.09 (0.04)
12	THSTMMD12	16.5	15.6	38.1	50.8	9.4	0.10 (0.05)
13	THSTMMD13	17.6	16.7	38.1	50.8	9.4	0.18 (0.08)
14	THSTMMD14	18.8	17.8	38.1	50.8	9.7	0.12 (0.05)

*Conventional hex

Deep, inches

11	6	12	A	B	C	D	E	Weight, lbs (kg)
3/16	THSTM6*	THSTMD6*	5/16	15/32	1 21/32	2	3/16	0.04 (0.02)
7/32	THSTM7*	THSTMD7*	11/32	15/32	1 21/32	2	7/32	0.04 (0.02)
1/4	THSTM8	THSTMD8	3/8	15/32	1 21/32	2	7/32	0.04 (0.02)
9/32	THSTM9	THSTMD9	13/32	15/32	1 21/32	2	1/4	0.05 (0.02)
5/16	THSTM10	THSTMD10	15/32	15/32	1 21/32	2	7/32	0.06 (0.03)
11/32	THSTM11	THSTMD11	1/2	15/32	1 21/32	2	9/32	0.05 (0.02)
3/8	THSTM12	THSTMD12	17/32	9/16	1 21/32	2	9/32	0.10 (0.05)
7/16	THSTM14	THSTMD14	5/8	9/16	1 21/32	2	3/8	0.10 (0.05)
1/2	THSTM16	THSTMD16	11/16	21/32	1 21/32	2	3/8	0.12 (0.05)
9/16	THSTM18	THSTMD18	3/4	23/32	1 21/32	2	3/8	0.13 (0.06)

*Conventional hex

THTMUM13A



THTM412

Double Square

11	Stock No.	A	B	C	D	E	Weight lbs (kg)
1/4	THTM408	15/32	15/32	17/32	7/8	1/4	0.027 (0.01)
5/16	THTM410	9/16	17/32	17/32	7/8	9/32	0.04 (0.02)
3/8	THTM412	21/32	5/8	17/32	7/8	5/16	0.05 (0.02)

Shallow Universal, mm

mm	12	A	B	D	E	Weight, lbs (kg)
5	THTMUM5A	8.1	12.7	29.2	3.3	0.05 (0.02)
6	THTMUM6A	9.6	12.7	29.7	3.8	0.04 (0.02)
7	THTMUM7A	10.7	12.7	30.5	4.3	0.04 (0.02)
8	THTMUM8A	11.8	12.7	30.5	4.8	0.04 (0.02)
9	THTMUM9A	12.7	12.7	31.2	4.8	0.10 (0.05)
10	THTMUM10A	14.0	12.7	32.5	5.8	0.04 (0.02)
12	THTMUM12A	16.5	12.7	34.5	6.9	0.05 (0.02)
13	THTMUM13A	17.3	12.7	36.8	7.6	0.05 (0.02)

Shallow Universal, inches

11	12	A	B	D	E	Weight, lbs (kg)
1/4	THTMU81B	3/8	1/2	1 17/64	1/4	0.37 (0.17)
5/16	THTMU101A	15/32	1/2	1 11/32	9/32	0.04 (0.02)
3/8	THTMU121A	17/32	1/2	1 27/64	9/32	0.05 (0.02)
7/16	THTMU141A	19/32	1/2	1 29/64	13/32	0.05 (0.02)
1/2	THTMU161A	11/16	1/2	1 33/64	13/32	0.05 (0.02)
9/16	THTMU181A	3/4	1/2	1 35/64	13/32	0.06 (0.03)

THTMA8E

Hex Bit, Standard Length, inches

		A	B	Weight, lbs (kg)
1/16	THTMA2E	1 7/8	TMA2E2	0.03 (0.01)
5/64	THTMA2.5E	1 7/8	TMA2.5E2	0.04 (0.02)
3/32	THTMA3E	1 7/8	TMA3E2	0.065 (0.03)
7/64	THTMA3.5E	1 7/8	TMA3.5E2	0.03 (0.01)
1/8	THTMA4E	1 7/8	TMA4E2	0.065 (0.03)
9/64	THTMA4.5E	1 7/8	TMA4.5E2	0.06 (0.03)
5/32	THTMA5E	1 7/8	FA5E2	0.06 (0.03)
3/16	THTMA6E	1 15/16	FA6E2	0.04 (0.02)
7/32	THTMA7E	1 7/8	FA7E2	0.043 (0.02)
1/4	THTMA8E	1 7/8	FA8E2	0.05 (0.02)

THTMP22E



Phillips Screwdriver Bit

		Stock No.	Square Drive, in	A	B	Weight, lbs (kg)
Standard	#1	THTMP12E	1/4	1 7/8	TMP12E2	0.04 (0.02)
	#2	THTMP22E	1/4	1 7/8	FP22E2	0.03 (0.01)
	#2	THTMP23E	1/4	3 1/16	TMP23E2	0.04 (0.02)
Short	#2	THTMP21E	1/4	1 1/4	TMP21E	0.054 (0.02)

THTMC105E

THTM83A



Flat Tip Screwdriver Bit

		Stock No.	Square Drive, in	A	B	Weight, lbs (kg)
Standard	3/16 × .032	THTMC104E	1/4	2 7/8	TMC104E2	0.07 (0.03)
	1/4 × .032	THTMC105E	1/4	2 15/16	TMC105E2	0.05 (0.02)
	3/8 × .042	THTMC106E	1/4	2 7/8	TMC106E2	0.06 (0.03)
Short	1/4 × .036	THTM82	1/4	7/8	TM82-2C	0.02 (0.01)
	3/8 × 1/32	THTM83A	1/4	3/4	–	0.03 (0.01)
	7/16 × 1/32	THTM84	1/4	3/4	–	0.03 (0.01)

THTMAM6E

Hex/Standard, mm

mm		Square Drive, in	A	Weight, lbs (kg)
2	THTMAM2E	1/4	47.8	0.03 (0.01)
2.5	THTMAM2.5E	1/4	47.8	0.04 (0.02)
3	THTMAM3E	1/4	47.8	0.04 (0.02)
4	THTMAM4E	1/4	47.8	0.04 (0.02)
5	THTMAM5E	1/4	47.8	0.04 (0.02)
6	THTMAM6E	1/4	47.8	0.05 (0.02)

THTMAB6E

Ball Hex Bit, Standard Length, inches

		A	B	Weight, lbs (kg)
1/8	THTMAB4E	1 7/8	TMAB4E2	0.034 (0.02)
9/64	THTMAB4.5E	1 7/8	TMAB4.5E2	0.04 (0.02)
5/32	THTMAB5E	1 7/8	TMAB5E2	0.04 (0.02)
3/16	THTMAB6E	1 7/8	TMAB6E2	0.04 (0.02)

THTM30E



Clutch Tip Screwdriver Bit, Standard Length

	Stock No.	Square Drive, in	A	B	Weight, lbs (kg)
3/16	THTM27E	1/4	3/16	1 3/8	0.03 (0.01)
1/4	THTM30E	1/4	1/4	1 3/8	0.05 (0.02)
5/32	THTM31E	1/4	5/32	1 3/8	0.05 (0.02)

THTMC16



Crowfoot Wrenches, Open End

	Stock No.	A	C	E	F	D	Weight, lbs (kg)
1/4	THTMC8	17/32	17/32	1/4	1/4	31/32	0.03 (0.01)
5/16	THTMC10	21/32	9/16	1/4	1/4	1 1/32	0.03 (0.01)
3/8	THTMC12	25/32	19/32	1/4	1/4	1 3/32	0.03 (0.01)
7/16	THTMC14	7/8	5/8	5/16	5/16	1 5/32	0.05 (0.02)
1/2	THTMC16	1 1/32	21/32	5/16	5/16	1 1/4	0.05 (0.02)
9/16	THTMC18	1 1/8	11/16	5/16	5/16	1 9/32	0.05 (0.02)

THTMAM4E

Ball Hex/Standard, mm

mm		Square Drive, in	A	Weight, lbs (kg)
3	THTMAM2E	1/4	47.7	0.04 (0.02)
4	THTMAM2.5E	1/4	47.6	0.01 (0)
5	THTMAM3E	1/4	47.9	0.04 (0.02)
6	THTMAM4E	1/4	47.9	0.03 (0.01)

⚠ WARNING

- Be sure to use a lanyard that has more weight capacity than the tool you are attaching because drop forces are greater than actual tool weight.
- Any tool that weighs more than 5 pounds should be attached to an anchor point such as a work platform or utility bucket rather than the operator.

RATCHETS, HANDLES AND EXTENSIONS

3/8" Drive

THF80

THFK80

THRAF80

THFL80

THFHC737

THFN100

THFRS70A

THPRT

THPALMRAT

3/8" Drive Tools@Height Ratchets & Accessories

Stock No.	Description	Overall Length (Inches)	Repair Kit	Weight, lbs (kg)
THF80	80 Tooth Standard Handle Ratchet	7-7/16"	THRKRF80LB	0.66 (0.3)
THFK80	80 Tooth Stubby Handle Ratchet	4-3/16"	THRKRF80LB	0.59 (0.27)
THFL80	80 Tooth Long Handle Ratchet	10-5/16"	THRKRF80LB	0.78 (0.35)
THFN100	Round Head Ratchet, Standard Length 7 in.	7-7/8"		0.60 (0.27)
THRAF80	Ratchet, Low Profile, Dual 80® Technology	7-1/2"	THRKRF80LB	0.37 (0.17)
THFHC737	Soft Grip Compact Swivel Head	6-7/8"		
THPALMRAT	Tethered Palm Ratchet	2-3/4"		0.75 (0.34)
THF77	3/8 in. Drive Ratchet Adaptor	2-3/16"		0.30 (0.14)
THFRS70A	Spinner			0.13 (0.06)
THRKRF8080LB	Drive gear and screws to retrofit existing 80 tooth ratchet models	-	-	-
THPRT	Pin Release Tool	-	-	-

3/8" Drive Handles

Stock No.	Description	Overall Length (Inches)	Weight, lbs (kg)
THF10L	Breaker Bar	9-9/16"	0.65 (0.29)
THF11TURBO	Turbo-T Spd Drvr 3/8 in. Sq Dr		1.3 (0.59)

THF10L

THF11TURBO

3/8" Drive Tools@Height Extensions & Accessories

Stock No.	Description	Overall Length (Inches)	Replacment Bits	Weight, lbs (kg)
THFX1	Extension 3/8 in. Drive	1-1/2"		0.11 (0.05)
THFXK3	Extension 3/8 in. Drive	3"		0.18 (0.08)
THFXK4	Extension 3/8 in. Drive	4"		0.21 (0.1)
THFXK6	Extension 3/8 in. Drive	6"		0.27 (0.12)
THFXK8	Extension 3/8 in. Drive	8"		0.35 (0.16)
THFXK11	Extension 3/8 in. Drive	11"		0.47 (0.21)
THFU8A	Universal Joint			0.14 (0.06)
THA2A	3/8 in. – 1/2 in. Step Up Adaptor	1-5/16"		0.1 (0.05)
THGFAT1E	Adaptor	1-1/4"	THGFAT1E2	0.09 (0.04)

THFX1

THFXK6

THFXK11

THFU8A

THA2A

THGFAT1E



THFSM61

THFM14

THFS161

THF161

Shallow, mm

mm	6	12	A	B	C	D	E	Weight, lbs (kg)
6	THFSM61	–	9.1	17.2	11.1	23.0	5.6	0.05 (0.02)
7	THFSM71	–	10.4	17.2	11.1	23.0	5.6	0.60 (0.27)
8	–	THFM8	11.6	17.2	11.1	23.0	6.4	0.04 (0.02)
9	–	THFM9	13.1	17.2	11.0	23.0	7.1	0.04 (0.02)
10	–	THFM10	14.3	17.2	11.0	23.0	7.1	0.05 (0.02)
11	–	THFM11	15.4	17.2	11.0	23.0	7.1	0.04 (0.02)
12	–	THFM12	16.5	17.2	11.9	23.8	8.1	0.50 (0.23)
13	–	THFM13	18.0	17.2	12.6	24.6	8.1	0.05 (0.02)
14	–	THFM14	19.6	18.6	13.2	26.2	9.1	0.06 (0.03)
15	–	THFM15	20.3	19.4	13.7	27.0	9.1	0.07 (0.03)
16	–	THFM16	21.1	20.2	15.0	27.8	10.4	0.08 (0.04)
17	–	THFM17	22.7	21.8	15.0	28.6	10.4	0.10 (0.05)
18	–	THFM18	24.3	23.2	15.7	28.6	10.9	0.12 (0.05)
19	–	THFM19	25.1	24.0	16.3	30.2	11.9	0.13 (0.06)

Shallow, inches

11	6	12	A	B	C	D	E	Weight, lbs (kg)
1/4	THFS081	THF081	13/32	11/16	7/16	29/32	7/32	0.05 (0.02)
5/16	THFS101	THF101	15/32	11/16	7/16	29/32	1/4	0.04 (0.02)
11/32	THFS111	THF111	1/2	11/16	7/16	29/32	9/32	0.04 (0.02)
3/8	THFS121	THF121	9/16	11/16	7/16	29/32	9/32	0.05 (0.02)
7/16	THFS141	THF141	5/8	11/16	7/16	29/32	9/32	0.05 (0.02)
1/2	THFS161	THF161	23/32	11/16	1/2	15/16	5/16	0.05 (0.02)
9/16	THFS181	THF181	25/32	3/4	1/2	1 1/32	3/8	0.07 (0.03)
5/8	THFS201	THF201	27/32	25/32	19/32	1 3/32	1/2	0.08 (0.04)
11/16	THFS221	THF221	15/16	7/8	5/8	1 1/8	17/32	0.11 (0.05)
3/4	THFS241	THF241	1	15/16	11/16	1 3/16	15/32	0.132 (0.06)
13/16	THFS261	THF261	1 1/16	1	11/16	1 7/32	1/2	0.15 (0.07)
7/8	THFS281	THF281	1 5/32	1 1/32	23/32	1 9/32	9/16	0.20 (0.09)
15/16	THFS301	THF301	1 1/4	1 3/16	25/32	1 11/32	9/16	0.25 (0.11)
1	THFS321	THF321	1 5/16	1 1/4	13/16	1 3/8	19/32	0.30 (0.14)

THSFM14

Deep, mm

mm	12	A	B	C	D	E	Weight, lbs (kg)
8	THSFM8	11.4	17.7	42.0	54.0	7.1	0.08 (0.04)
9	THSFM9	12.8	17.2	42.0	54.0	7.1	0.08 (0.04)
10	THSFM10	14.3	17.2	42.0	54.0	7.9	0.1 (0.05)
11	THSFM11	15.7	17.2	42.0	54.0	9.7	0.114 (0.05)
12	THSFM12	16.5	17.2	42.0	54.0	9.9	0.12 (0.05)
13	THSFM13	18.0	17.2	42.0	54.0	10.7	0.123 (0.06)
14	THSFM14	19.6	18.6	43.3	60.3	10.7	0.16 (0.07)
15	THSFM15	20.3	19.4	43.3	60.3	10.7	0.17 (0.08)
16	THSFM16	21.1	20.0	43.3	60.3	10.7	0.181 (0.08)
17	THSFM17	22.7	21.8	43.6	66.7	11.2	0.225 (0.1)
18	THSFM18	24.3	23.2	49.0	66.7	11.2	0.30 (0.14)
19	THSFM19	25.1	24.0	49.0	66.7	15.5	0.27 (0.12)

THSFS161

THSF161

Deep, inches

11	6	12	A	B	C	D	E	Weight, lbs (kg)
1/4	THSFS081	THSF081	15/32	11/16	1 11/16	2 1/8	1/4	0.06 (0.03)
5/16	THSFS101	THSF101	15/32	11/16	1 11/16	2 1/8	7/32	0.80 (0.36)
3/8	THSFS121	THSF121	9/16	11/16	1 11/16	2 1/8	5/16	0.10 (0.05)
7/16	THSFS141	THSF141	5/8	11/16	1 11/16	2 1/8	3/8	0.10 (0.05)
1/2	THSFS161	THSF161	23/32	11/16	1 11/16	2 1/8	7/16	0.10 (0.05)
9/16	THSFS181	THSF181	25/32	23/32	1 29/32	2 3/8	7/16	0.15 (0.07)
19/32	–	THSF191	13/16	25/32	1 29/32	2 3/8	7/16	0.16 (0.07)
5/8	THSFS201	THSF201	27/32	13/16	1 29/32	2 3/8	15/32	0.18 (0.08)
11/16	THSFS221	THSF221	15/16	7/8	2 3/16	2 5/8	1/2	0.19 (0.09)
3/4	THSFS241	THSF241	1	1	2 3/16	2 5/8	5/8	0.25 (0.11)
13/16	THSFS261	THSF261	1 1/16	1	2 1/4	2 3/4	5/8	0.30 (0.14)
7/8	THSFS281	THSF281	1 5/32	1 1/8	2 1/4	2 3/4	23/32	0.35 (0.16)
15/16	–	THSF301	1 1/4	1 3/16	2 1/4	2 3/4	23/32	0.41 (0.19)
1	–	THSF321	1 5/16	1 1/4	2 1/4	2 3/4	13/16	0.46 (0.21)

ASME/ANSI B107.1-2002



Snap-on T@H sockets, extensions, and adaptors feature a locking hole on all four sides, not just one. T@H ratchets and drive tools feature a locking pin which mates with the side lock hole for positive retention. This reduces the risk of misaligning the socket that typical competitor's sockets with just one side hole create.

Release pin with THPRT – Pin Release Tool for Square Drive Tools

Do not use quick release tools with locking collars or push button release. These tools can be disengaged inadvertently.

THPRT

⚠ WARNING

- Be sure to use a lanyard that has more weight capacity than the tool you are attaching because drop forces are greater than actual tool weight.
- Any tool that weighs more than 5 pounds should be attached to an anchor point such as a work platform or utility bucket rather than the operator.

SOCKETS

3/8" Drive

THFUM14A

Shallow Universal, mm

mm	12	A	B	D	E	Weight, lbs (kg)
10	THFUM10A	14.0	18.1	43.5	6.4	0.1 (0.05)
12	THFUM12A	16.8	18.1	45.5	7.9	0.11 (0.05)
13	THFUM13A	18.1	18.1	45.5	7.9	0.1 (0.05)
14	THFUM14A	18.9	18.1	47.9	8.9	0.1 (0.05)
15	THFUM15A	20.5	18.1	47.9	8.9	0.1 (0.05)
16	THFUM16A	21.3	18.1	47.9	10.2	0.1 (0.05)
17	THFUM17A	22.9	18.9	50.7	10.4	0.5 (0.23)

THFAM12E

Hex/Standard, mm

mm		A	B	Weight, lbs (kg)
4	THFAM4E	52.3	FAM4E2	0.07 (0.03)
5	THFAM5E	52.6	FAM5E2	0.07 (0.03)
6	THFAM6E	52.6	FAM6E2	0.09 (0.04)
7	THFAM7E	52.6	FAM7E2	0.09 (0.04)
8	THFAM8E	52.6	FAM8E2	0.103 (0.05)
9	THFAM9E	52.6	FAM9E2	0.21 (0.1)
10	THFAM10E	52.6	SAM10E2	0.04 (0.02)
11	THFAM11E	69.9	FAM11E2	0.15 (0.07)
12	THFAM12E	69.9	FAM12E2	0.22 (0.1)
13	THFAM13E	69.9	FAM13E2	0.24 (0.11)
14	THFAM14E	69.9	FAM14E2	0.31 (0.14)

THFAB8E

Ball Hex/Standard, inches

		A	B	Weight, lbs (kg)
7/32	THFAB7E	2 3/32	FAB7E2	0.08 (0.04)
1/4	THFAB8E	2 3/32	FAB8E2	0.09 (0.04)
5/16	THFAB10E	2 3/32	FAB10E2	0.1 (0.05)
3/8	THFAB12E	2 3/32	FAB12E2	0.13 (0.06)

THPP410A

Pipe Plug Socket

Stock No.	Size	Weight, lbs (kg)
THPP410A	5/16	0.05 (0.02)

THFU16B

Shallow Universal, inches

	12	A	B	D	E	Weight, lbs (kg)
5/16	THFU10B	15/32	11/16	1 5/8	1/4	0.4 (0.02)
3/8	THFU12B	17/32	11/16	1 5/8	1/4	0.1 (0.05)
7/16	THFU14B	5/8	11/16	1 5/8	9/32	0.09 (0.04)
1/2	THFU16B	23/32	11/16	1 11/16	9/32	0.1 (0.05)
9/16	THFU18B	25/32	11/16	1 23/32	11/32	0.1 (0.05)
5/8	THFU20B	27/32	11/16	1 25/32	3/8	0.11 (0.05)
11/16	THFU22B	15/16	3/4	2	3/8	0.15 (0.07)
3/4	THFU24B	1	3/4	2 1/16	7/16	0.16 (0.07)
13/16	THFU26B	1 3/32	3/4	2 3/32	15/32	0.15 (0.07)
7/8	THFU28B	1 5/32	3/4	2 3/32	1/2	0.15 (0.07)
15/16	THFU30A	1 1/4	3/4	2 9/32	9/16	0.21 (0.1)
1	THFU32A	1 5/16	3/4	2 9/32	9/16	0.231 (0.1)

THFA8E

Hex/Standard, inches

		A	B	Weight, lbs (kg)
1/8	THFA4E	2 1/16	TMA4E2	0.07 (0.03)
9/64	THFA4.5E	2 1/16	TMA4.5E2	0.05 (0.02)
5/32	THFA5E	2 1/16	FA5E2	0.07 (0.03)
3/16	THFA6E	2 1/16	FA6E2	0.07 (0.03)
7/32	THFA7E	2 1/16	FA7E2	0.08 (0.04)
1/4	THFA8E	2 1/16	FA8E2	0.09 (0.04)
5/16	THFA10E	2 1/16	FA10E2	0.1 (0.05)
3/8	THFA12E	2 3/32	FA12E2	0.125 (0.06)

THFA8LE

Hex/Extra Long, inches

		A	Fits These Cap Screws	Fits These Set Screws	B	Weight, lbs (kg)
5/32	THFA5LE	6 1/16	#10	5/16"	FA5LE2	0.11 (0.05)
3/16	THFA6LE	6 1/8	1/4"	3/8"	FA6LE2	0.1 (0.05)
7/32	THFA7LE	6 1/8	—	7/16"	FA7LE2	0.13 (0.06)
1/4	THFA8LE	6 1/8	5/16"	1/2"	FA8LE2	0.15 (0.07)
5/16	THFA10LE	6 1/16	3/8"	5/8"	FA10LE2	0.19 (0.09)
3/8	THFA12LE	6 1/16	1/4"	3/4"	FA12LE2	0.25 (0.11)

Flank Drive Flare Nut, inches, 6-Point (chrome)

		A	B	C	D	E	Maximum Recommended Working Torque, in. lb.	Weight, lbs (kg)
3/8	THFRH120S	13/32	1/4	9/16	1 11/32	3/8	150	0.07 (0.03)
7/16	THFRH140S	29/32	5/16	9/16	1 13/32	3/8	200	0.07 (0.03)
1/2	THFRH160S	1	11/32	9/16	1 7/16	3/8	250	0.08 (0.04)
9/16	THFRH180S	1 1/8	3/8	3/4	1 5/8	7/16	300	0.12 (0.05)
5/8	THFRH200S	1 1/8	7/16	3/4	1 5/8	7/16	375	0.10 (0.05)
11/16	THFRH220S	1 5/16	1/2	13/16	1 25/32	1/2	450	0.15 (0.07)
3/4	THFRH240S	1 5/16	9/16	13/16	1 25/32	1/2	525	0.13 (0.06)



THFRH160S

Open End, inches

		A	C	E	F	D	Maximum Recommended Working Torque, in. lb.	Weight, lbs (kg)
3/8	THFC12	7/8	23/32	7/32	33/64	1 19/64	75	0.07 (0.03)
7/16	THFC14	7/8	41/64	7/32	33/64	1 17/64	75	0.06 (0.03)
1/2	THFC16	1 1/32	51/64	7/32	33/64	1 29/64	105	0.08 (0.04)
9/16	THFC18	1 1/4	59/64	7/32	33/64	1 5/8	105	0.08 (0.04)
5/8	THFC20	1 1/4	55/64	7/32	33/64	1 19/32	125	0.08 (0.04)
11/16	THFC22	1 9/16	1 3/32	7/32	33/64	1 59/64	150	0.14 (0.06)
3/4	THFC24	1 9/16	1 1/32	7/32	33/64	1 57/64	190	1.00 (0.45)
13/16	THFC26	1 23/32	1 3/32	9/32	19/32	2	245	0.19 (0.09)
7/8	THFC28	1 23/32	1 1/32	9/32	19/32	1 31/32	300	0.18 (0.08)
15/16	THFC30	2	1 5/32	11/32	21/32	2 1/8	360	0.26 (0.12)
1	THFC32	2	1 5/64	11/32	21/32	2 3/32	420	0.24 (0.11)
1 1/16	THFC34	1 23/32	1 3/64	3/8	39/64	1 15/32	465	0.24 (0.11)
1 1/8	THFC36	1 29/32	1 5/32	3/8	39/64	2 1/16	510	0.21 (0.1)
1 3/16	THFC38	1 29/32	1 13/64	3/8	39/64	2 1/16	510	0.21 (0.1)
1 1/4	THFC40	2 5/32	1 15/64	3/8	41/64	2 7/32	555	0.26 (0.12)
1 5/16	THFC42	2 5/32	1 17/64	3/8	41/64	2 7/32	600	0.26 (0.12)
1 3/8	THFC44	2 3/8	1 19/64	3/8	41/64	2 3/8	680	0.30 (0.14)
1 7/16	THFC46	2 3/8	1 11/32	3/8	41/64	2 3/8	760	0.29 (0.13)
1 1/2	THFC48	2 17/32	1 3/8	3/8	41/64	2 1/2	795	0.33 (0.15)
1 9/16	THFC50	2 17/32	1 13/32	3/8	41/64	2 1/2	795	0.32 (0.15)
1 5/8	THFC52	2 21/32	1 29/64	3/8	41/64	2 19/32	820	0.31 (0.14)
1 11/16	THFC54	2 21/32	1 31/64	3/8	41/64	2 19/32	860	0.31 (0.14)
1 3/4	THFC56	2 7/8	1 33/64	3/8	41/64	2 3/4	910	0.36 (0.16)
1 13/16	THFC58	2 7/8	1 35/64	3/8	41/64	2 3/4	960	0.34 (0.15)
1 7/8	THFC60	3 5/32	1 19/32	3/8	41/64	2 55/64	1040	0.43 (0.2)
1 15/16	THFC62	3 5/32	1 5/8	3/8	41/64	2 55/64	1040	0.43 (0.2)
2	THFC64	3 13/32	1 23/32	1/2	45/64	3 1/8	1115	0.66 (0.3)
2 1/16	THFC66	3 13/32	1 3/4	1/2	45/64	3 1/8	1190	0.66 (0.3)
2 1/8	THFC68	3 19/32	1 25/32	1/2	45/64	3 1/4	1190	0.74 (0.34)
2 3/16	THFC70	3 19/32	1 53/64	1/2	45/64	3 1/4	1275	0.72 (0.33)
2 1/4	THFC72	3 27/32	1 15/16	1/2	45/64	3 1/2	1370	0.86 (0.39)
2 5/16	THFC74	3 27/32	1 15/16	1/2	45/64	3 1/2	1370	0.84 (0.38)
2 3/8	THFC76	4 3/32	2 1/16	1/2	45/64	3 3/4	1450	0.99 (0.45)
2 7/16	THFC78	4 3/32	2 1/8	1/2	45/64	3 3/4	1555	1.00 (0.45)
2 1/2	THFC80	4 9/32	2 11/64	1/2	45/64	3 57/64	1555	1.04 (0.47)
2 9/16	THFC82	4 9/32	2 11/64	1/2	45/64	3 57/64	1660	1.04 (0.47)
2 5/8	THFC84	4 17/32	2 21/64	1/2	45/64	4 1/8	1760	1.14 (0.52)
2 11/16	THFC86	4 17/32	2 3/8	1/2	45/64	4 1/8	1760	1.12 (0.51)
2 3/4	THFC88	4 23/32	2 7/16	1/2	45/64	4 19/64	1900	1.27 (0.58)
2 13/16	THFC90	4 23/32	2 17/32	1/2	45/64	4 19/64	2075	1.33 (0.6)
2 7/8	THFC92	5 3/32	2 41/64	1/2	45/64	4 43/64	2075	1.54 (0.7)
2 15/16	THFC94	5 3/32	2 43/64	1/2	45/64	4 5/8	2200	1.51 (0.68)
3	THFC96	5 3/32	2 23/32	1/2	45/64	4 5/8	2200	1.47 (0.67)

THFC48

3/8" Drive Flank Drive Flare Nut-Deep, inches, 12-Point (chrome)

		A	B	C	E	Maximum Recommended Working Torque, in. lb.	Weight, lbs (kg)
5/8	THAN850810	15/16	1/2	23/32	23/32	250	0.07 (0.03)
11/16	THAN850811	1 1/32	17/32	25/32	23/32	310	0.08 (0.04)
3/4	THAN850812	1 1/8	9/16	13/16	3/4	450	0.11 (0.05)
13/16	THAN850813	1 7/32	5/8	7/8	3/4	450	0.10 (0.05)
7/8	THAN850814	1 5/16	25/32	15/16	25/32	625	0.15 (0.07)
15/16	THAN850815	1 3/8	3/4	31/32	25/32	625	0.15 (0.07)
1	THAN850816	1 7/16	3/4	1	13/16	625	0.15 (0.07)
1 1/16	THAN850817	1 17/32	25/32	1 1/32	13/16	625	0.15 (0.07)

ASME/ANSI B107.100

THAN850812

⚠ WARNING

- Be sure to use a lanyard that has more weight capacity than the tool you are attaching because drop forces are greater than actual tool weight.
- Any tool that weighs more than 5 pounds should be attached to an anchor point such as a work platform or utility bucket rather than the operator.

RATCHETS AND ACCESSORIES

1/2" Drive

THSL80A

JHWBS-63B

THS77A

THPRT

THS80A

THSA936A

JHWBS-62

THGSP936

1/2" Drive Tools@Height Ratchets & Accessories

Stock No.	Description	Overall Length (Inches)	Repair Kit	Weight, lbs (kg)
THS80A	80 Tooth Standard Handle Ratchet	10 5/16"	THRKRS80A	1.60 (0.73)
THSL80A	80 Tooth Long Handle Ratchet	15"	THRKRS80A	1.93 (0.88)
THSA936A	Scaffold Ratchet With Hammer	10 5/16"		2.12 (0.96)
JHWBS-63B	Scaffold Ratchet with Hammer and Prybar	14"		2.74 (1.24)
JHWBS-62	Scaffold Ratchet with Hammer Only	11"		2.55 (1.16)
THS77A	Ratchet Adaptor	3"		0.90 (0.41)
THGSP936	Spud Ratchet	15 5/8"		2.44 (1.11)
THRKRS80A80L	Drive gear and screws to retrofit existing 80 tooth ratchet models	-		
THPRT	Pin Release Tool	-		-

1/2" Drive Handles

Stock No.	Description	Overall Length (Inches)	Weight, lbs (kg)
THSN15	Breaker Bar	15"	1.70 (0.77)
THSN18	Breaker Bar	18"	3.00 (1.36)
THSN24	Breaker Bar	24"	2.40 (1.09)

THSN15

THSN24

THSX2

THSXK8

THSX15

THS8

1/2" Drive Extensions & Accessories

Stock No.	Description	Overall Length (Inches)	Weight, lbs (kg)
THSX2	Extension	2 1/8"	0.25 (0.11)
THSXK3	Knurled Extension	3 1/2"	0.40 (0.18)
THSXK5	Knurled Extension	5"	0.53 (0.24)
THSXK8	Knurled Extension	8"	0.74 (0.34)
THSXK11	Knurled Extension	11"	1.04 (0.47)
THSX15	Extension	15"	1.00 (0.45)
THS8	Universal Joint	2 11/16"	0.29 (0.13)
THGLA12B	1/2" Female x 3/4" Male Adaptor	1 7/16"	0.36 (0.16)
THGSAF1F	1/2" Female x 3/8" Male Adaptor	1 3/16"	0.20 (0.09)
THGLAS1F	3/4" Female x 1/2" Male Adaptor	2 7/16"	0.50 (0.23)
THGLAS1F2	Replacement Bit / THGLAS1F		

THGLA12B

THGSAF1F

THSWM191

Shallow, mm

mm	12	A	B	C	D	Weight, lbs (kg)
10	THSWM101A	15.0	23.2	22.22	38.1	0.13 (0.06)
11	THSWM111A	16.6	23.2	22.22	38.1	0.133 (0.06)
12	THSWM121A	18.2	23.2	22.22	38.1	0.14 (0.06)
13	THSWM131A	19.0	23.2	22.22	38.1	0.14 (0.06)
14	THSWM141A	20.6	23.2	22.22	38.1	0.142 (0.06)
15	THSWM151A	22.0	22.2	22.22	38.1	0.15 (0.07)
16	THSWM161	23.8	22.2	22.22	38.1	0.14 (0.06)
17	THSWM171	24.6	23.2	22.22	38.1	0.17 (0.08)
18	THSWM181	25.4	23.8	21.4	38.1	0.15 (0.07)
19	THSWM191	26.3	24.8	21.3	38.1	0.17 (0.08)
20	THSWM201	26.7	26.1	21.2	38.1	0.18 (0.08)
21	THSWM211	28.3	27.5	21.1	38.1	0.21 (0.01)
22	THSWM221	29.9	28.6	20.9	38.1	0.23 (0.01)
23	THSWM231	31.2	29.9	20.8	38.1	0.265 (0.012)
24	THSWM241	32.5	30.9	22.2	38.8	0.28 (0.013)
25	THSWM251	33.3	31.7	22.2	38.8	0.4 (0.18)
26	THSWM261	34.9	33.3	23.8	41.2	0.55 (0.25)
27	THSWM271	36.5	34.9	25.4	42.8	0.6 (0.27)
28	THSWM281	38.1	36.5	26.9	44.4	0.30 (0.14)
29	THSWM291	39.3	38.0	26.1	44.5	0.35 (0.16)
30	THSWM301	41.0	39.6	26.1	44.5	0.4 (0.18)
31	THSWM311	42.5	41.2	29.1	47.6	0.52 (0.24)
32	THSWM321	42.5	41.2	28.9	47.6	0.64 (0.29)

THSW241

Shallow, inches

	12	A	B	C	D	E	Weight, lbs (kg)
3/8	THSW121A	19/32	29/32	7/8	1 1/2	5/16	0.13 (0.06)
7/18	THSW141A	11/16	29/32	7/8	1 1/2	11/32	0.13 (0.06)
1/2	THSW161A	3/4	29/32	7/8	1 1/2	13/32	0.14 (0.06)
9/16	THSW181A	13/16	29/32	7/8	1 1/2	13/32	0.14 (0.06)
5/8	THSW201	15/16	7/8	7/8	1 1/2	15/32	0.14 (0.06)
11/16	THSW221	31/32	29/32	7/8	1 1/2	1/2	0.15 (0.07)
3/4	THSW241	1 31/32	31/32	7/8	1 1/2	9/16	0.17 (0.08)
13/16	THSW261	1 1/8	1 1/16	7/8	1 1/2	9/16	0.2 (0.09)
7/8	THSW281	1 13/16	1 1/8	7/8	1 1/2	25/32	0.2 (0.09)
15/16	THSW301	1 9/32	1 7/32	27/32	1 17/32	3/4	0.28 (0.016)
1	THSW321	1 11/32	1 9/32	7/8	1 9/16	3/4	0.3 (0.14)
1 1/16	THSW341	1 7/16	1 3/8	1 31/32	1 11/16	3/4	1.8 (0.82)
1 1/8	THSW361	1 1/2	1 7/16	1 31/32	1 3/4	1 3/16	0.44 (0.2)
1 3/16	THSW381	1 5/8	1 9/16	1 1/8	1 3/4	3/4	0.535 (0.27)
1 1/4	THSW401	1 11/16	1 5/8	1 1/4	1 7/8	3/4	0.6 (0.27)
1 5/16	THSW421	1 3/4	1 11/16	1 1/4	1 7/8	1	0.65 (0.29)
1 1/2	THSW481	2	1 15/16	1 5/8	2 1/2	1	1 (0.45)

THSM19

Deep 1/2" Drive, mm

	6	12	A	B	C	D	E	Weight, lbs (kg)
10		THSM10A	15.0	23.2	66.7	82.6	7.9	0.2 (0.09)
11		THSM11A	16.6	23.2	66.7	82.6	8.7	0.23 (0.1)
12		THSM12B	18.2	23.2	66.7	82.6	9.5	0.25 (0.11)
13		THSM13A	19.0	23.2	66.7	82.6	10.3	0.25 (0.11)
14		THSM14A	20.6	23.2	66.7	82.6	10.3	0.31 (0.14)
15		THSM15A	22.2	23.2	66.7	82.6	10.3	0.35 (0.16)
16		THSM16	23.8	22.2	51.0	82.6	11.9	0.3 (0.14)
17		THSM17	24.6	22.2	51.0	82.6	12.7	0.35 (0.16)
18		THSM18	25.4	23.2	51.0	82.6	14.3	0.355 (0.16)
19		THSM19	26.3	23.8	52.5	82.6	14.2	0.4 (0.18)
20		THSM20	26.7	24.6	58.5	82.6	14.0	0.4 (0.18)
21		THSM21	28.3	27.5	58.5	82.6	14.0	0.45 (0.2)
22	THTSM22	THSM22	29.9	28.6	58.5	82.6	14.2	0.5 (0.23)
23	THTSM23	THSM23	31.2	29.9	58.0	82.6	14.5	0.55 (0.25)
24	THTSM24	THSM24	32.5	30.9	50.0	82.6	15.8	0.6 (0.27)
25	THTSM25	THSM25	33.3	31.7	50.0	82.6	15.8	0.51 (0.23)
26	THTSM26	THSM26	34.9	33.3	50.0	82.6	15.8	0.60 (0.27)
27	THTSM27	THSM27	36.2	34.9	50.0	82.6	17.5	0.60 (0.27)
28	THTSM28	THSM28	37.8	36.5	50.0	82.6	17.5	0.62 (0.28)
29	THTSM29	THSM29	39.3	38.0	64.3	82.6	17.8	0.69 (0.31)
30	THTSM30	THSM30	41.0	39.6	64.0	82.6	18.5	0.77 (0.35)
31	THTSM31	THSM31	42.5	41.2	64.0	82.6	19.1	0.85 (0.39)
32	THTSM32	THSM32	42.5	41.2	63.8	82.6	19.8	0.97 (0.44)

THS241

Deep, inches

	12	A	B	C	Weight, lbs (kg)
3/8	THS121A	19/32	29/32	2 5/8	0.2 (0.09)
7/16	THS141A	3/4	29/32	2 5/8	0.25 (0.11)
1/2	THS161A	3/4	29/32	2 5/8	0.26 (0.12)
9/16	THS181A	13/16	29/32	2 5/8	0.3 (0.14)
5/8	THS201	15/16	7/8	1 31/32	0.29 (0.13)
11/16	THS221	31/32	29/32	1 31/32	0.35 (0.16)
3/4	THS241	1 1/32	31/32	2 5/8	0.4 (0.18)
13/16	THS261	1 1/8	1 1/16	2 5/8	0.45 (0.2)
7/8	THS281	1 3/16	1 1/8	2 5/8	0.501 (0.23)
15/16	THS301	1 9/32	1 7/32	1 31/32	0.6 (0.27)
1	THS321	1 11/32	1 9/32	1 31/32	0.65 (0.29)
1 1/16	THS341	1 1 7/16	1 3/8	1 31/32	0.75 (0.34)
1 1/8	THS361	1 1/2	1 7/16	1 31/32	0.85 (0.39)
1 3/16	THS381	1 5/8	1 9/16	2 5/8	1.02 (0.46)
1 1/4	THS401	1 11/16	1 5/8	2 5/8	1.09 (0.49)
1 5/16	THS421	1 3/4	1 11/16	2 9/16	1.14 (0.52)
1 3/8	THS441	1 13/16	1 3/4	2 9/16	1.22 (0.55)
1 7/16	THS461	1 15/16	1 7/8	2 9/16	1.31 (0.59)
1 1/2	THS481	2	1 15/16	2 9/16	139 (0.63)



Snap-on T@H sockets, extensions, and adaptors feature a locking hole on all four sides, not just one. T@H ratchets and drive tools feature a locking pin which mates with the side lock hole for positive retention. This reduces the risk of misaligning the socket that typical competitor's sockets with just one side hole create.

Release pin with THPRT – Pin Release Tool for Square Drive Tools

Do not use quick release tools with locking collars or push button release. These tools can be disengaged inadvertently.

THPRT

⚠ WARNING

- Be sure to use a lanyard that has more weight capacity than the tool you are attaching because drop forces are greater than actual tool weight.
- Any tool that weighs more than 5 pounds should be attached to an anchor point such as a work platform or utility bucket rather than the operator.

SOCKETS

1/2" Drive

Universal, inches

	6	A	B	D	E	Weight, lbs (kg)
9/16	THSU18	27/32	15/16	2 7/16	11/32	0.25 (0.11)
5/8	THSU20	15/16	15/16	2 15/32	3/8	0.25 (0.11)
11/16	THSU22	1 1/16	1 1/16	2 9/16	7/16	0.35 (0.16)
3/4	THSU24	1 1/8	1 1/8	2 7/8	1/2	0.43 (0.2)
13/16	THSU26	1 3/16	1 1/8	2 15/16	9/16	0.45 (0.2)
7/8	THSU28	1 1/4	1 1/8	2 15/16	9/16	0.46 (0.21)
15/16	THSU30	1 5/16	1 1/8	3	9/16	0.49 (0.22)

ASME/ANSI B107.1-1993

THSU24

THSAM12E

THSA16E

Hex/Standard, mm

mm		A	B	Weight, lbs (kg)
6	THSAM6E	60.5	FAM6E2	0.18 (0.08)
8	THSAM8E	62	FAM8E2	0.20 (0.09)
10	THSAM10E	62.8	SAM10E2	0.23 (0.1)
12	THSAM12E	81	SAM12E2	0.32 (0.15)
14	THSAM14E	81	SAM14E2	0.45 (0.2)
17	THSAM17E	93.7	SAM17E2	0.73 (0.33)
19	THSAM19E	103.1	SAM19E2	1.05 (0.48)

Hex/Standard, inches

		A	B	Weight, lbs (kg)
5/16	THSA10E	2 3/8	FA10E2	0.21 (0.1)
3/8	THSA12E	2 1/2	SA12E2	0.25 (0.11)
7/16	THSA14E	2 7/8	SA14E2	0.30 (0.14)
1/2	THSA16E	3 1/16	SA16E2	0.35 (0.16)
9/16	THSA18E	3 3/16	SA18E2	0.45 (0.2)
5/8	THSA20E	3 11/32	LAW120E2	0.68 (0.31)
3/4	THSA24E	4 1/16	LAW124E2	1.04 (0.47)

THSC48



THAN850824

Open End, inches

		A	C	E	F	Maximum Recommended Working Torque, in. lb.	Weight, lbs (kg)
1 1/16	THSC34	2 3/32	1 3/4	3/8	5/8	2,000	0.30 (0.14)
1 1/8	THSC36	2 7/32	1 3/4	3/8	5/8	2,100	0.37 (0.17)
1 3/16	THSC38	2 11/32	1 3/4	13/32	5/8	2,200	0.42 (0.19)
1 1/4	THSC40	2 15/32	2	13/32	5/8	2,300	0.42 (0.19)
1 5/16	THSC42	2 19/32	2	7/16	5/8	2,400	0.46 (0.21)
1 3/8	THSC44	2 23/32	2	7/16	5/8	2,500	0.54 (0.24)
1 7/16	THSC46	2 27/32	2	7/16	5/8	2,600	0.59 (0.27)
1 1/2	THSC48	2 31/32	2	15/32	5/8	2,900	0.64 (0.29)
1 5/8	THSC52	3 7/32	1 31/32	1/2	5/8	3,400	0.70 (0.32)
1 11/16	THSC54	3 11/32	2 3/16	1/2	5/8	3,700	1.00 (0.45)
1 3/4	THSC56	3 15/32	2 3/16	17/32	5/8	3,900	0.85 (0.39)
1 13/16	THSC58	3 19/32	2 3/16	17/32	5/8	4,100	0.86 (0.39)
1 7/8	THSC60	3 23/32	2 3/16	9/16	5/8	4,300	1.00 (0.45)
2	THSC64	3 31/32	2 7/32	9/16	5/8	5,000	1.15 (0.52)

Flare Nut-Deep, inches, 12-Point

		A	B	C	E	Maximum Recommended Working Torque, in. lb.	Weight, lbs (kg)
1 1/8	THAN850818	1 5/8	27/32	1 5/32	7/8	825	0.20 (0.09)
1 3/16	THAN850819	1 11/16	29/32	1 3/16	7/8	825	0.24 (0.11)
1 1/4	THAN850820	1 25/32	15/16	1 7/32	7/8	825	0.25 (0.11)
1 5/16	THAN850821	1 27/32	31/32	1 1/4	7/8	900	0.25 (0.11)
1 3/8	THAN850822	1 15/16	1 1/16	1 5/16	15/16	900	0.30 (0.14)
1 7/16	THAN850823	2	1 1/16	1 11/32	15/16	900	0.30 (0.14)
1 1/2	THAN850824	2 3/32	1 1/8	1 3/8	15/16	900	0.30 (0.14)
1 9/16	THAN850825	2 5/32	1 5/32	1 13/32	15/16	900	0.33 (0.15)
1 5/8	THAN850826	2 7/32	1 7/32	1 7/16	15/16	1,100	0.35 (0.16)
1 11/16	THAN850827	2 5/16	1 5/16	1 1/2	1 1/32	1,100	0.40 (0.18)
1 3/4	THAN850828	2 3/8	1 5/16	1 9/16	1 1/32	1,150	0.45 (0.2)
1 13/16	THAN850829	2 15/32	1 11/32	1 19/32	1 1/32	1,200	0.44 (0.2)
1 7/8	THAN850830	2 9/16	1 3/8	1 21/32	1 1/16	1,200	0.45 (0.2)
1 15/16	THAN850831	2 5/8	1 7/16	1 11/16	1 1/16	1,200	0.50 (0.23)
2	THAN850832	2 23/32	1 9/16	1 23/32	1 1/16	1,400	0.87 (0.39)

ASME/ANSI B107.100

3/4" Drive

3/4" Drive Ratchet and Drive Tools

Stock No.	Description	Overall Length (Inches)	Weight, lbs (kg)
THL52B-872H	Sliding T-Handle Head with 19" Handle	19 1/4	3.68 (1.67)
THL872-RJ	Sealed Ratchet with Knuled 19" Handle	19 1/4	4.15 (1.88)
THL872-RM	Sealed Ratchet with Knurled 36" Handle	26	7.16 (3.25)
THL8112A-RJ	Breaker Bar Head with Knurled 19" Handle	19	1.16 (0.53)
THL8112A-RM	Breaker Bar Head with Knurled 36" Handle	36	1.16 (0.53)
THL32	Extension with Locking Button	3	0.80 (0.36)
THL42	Extension with Locking Button	5	1.17 (0.53)
THL62	Extension with Locking Button	8	1.71 (0.78)
THL122	Extension with Locking Button	16	3.31 (1.5)

ASME/ANSI B107.1-1993

THLDHM302

3/4" Drive, Shallow, mm

mm	12	A	B	C	D	E	Weight, lbs (kg)
22	THLDHM222	31.10	34.60	30.20	50.80	17.10	0.48 (0.22)
24	THLDHM242	33.40	34.60	31.80	50.80	17.90	0.52 (0.24)
27	THLDHM272	37.30	39.50	31.80	54.00	19.90	0.56 (0.25)
30	THLDHM302	41.00	39.80	34.00	57.20	21.80	0.61 (0.28)
36	THLDHM362	49.30	41.20	35.10	58.70	22.10	0.94 (0.43)
41	THLDHM412	55.10	44.50	42.90	66.50	26.70	1.25 (0.57)

ASME/ANSI B107.1-1993

3/4" Drive (Flank Drive)

11	12	A	B	C	D	E	Weight, lbs (kg)
3/4	THLDH242	1 1/8	1 7/16	1 1/4	2	16/32	0.48 (0.22)
13/16	THLDH262	1 7/32	1 7/16	1 1/4	2	11/16	0.50 (0.23)
7/8	THLDH282	1 5/16	1 7/16	1 1/4	2	11/16	0.52 (0.24)
15/16	THLDH302	1 3/8	1 7/16	1 1/4	2	23/32	0.60 (0.27)
31/32	THLDH312	1 13/32	1 7/16	1 1/4	2	23/32	0.51 (0.23)
1	THLDH322	1 15/32	1 1/2	1 5/16	2 1/16	3/4	0.57 (0.26)
1 1/16	THLDH342	1 9/16	1 1/2	1 3/8	2 1/8	3/4	0.59 (0.27)
1 1/8	THLDH362	1 5/8	1 1/2	1 7/16	2 3/16	13/16	0.63 (0.29)
1 3/16	THLDH382	1 11/16	1 1/2	1 1/2	2 1/4	7/8	0.68 (0.31)
1 1/4	THLDH402	1 3/4	1 1/2	1 1/2	2 1/4	15/16	0.72 (0.33)
1 5/16	THLDH422A	1 7/8	1 3/4	1 9/16	2 1/2	7/8	0.95 (0.43)
1 3/8	THLDH442	1 15/16	1 3/4	1 9/16	2 1/2	7/8	0.98 (0.44)
1 7/16	THLDH462	2	1 3/4	1 5/8	2 1/2	15/16	1.01 (0.46)
1 1/2	THLDH482	2 1/8	1 3/4	1 11/16	2 1/2	1 1/16	1.23 (0.56)
1 9/16	THLDH502	2 3/16	1 3/4	1 7/8	2 5/8	1 5/32	1.19 (0.54)
1 5/8	THLDH522	2 1/4	1 3/4	1 7/8	2 5/8	1 5/32	1.30 (0.59)
1 11/16	THLDH542	2 3/8	1 3/4	2	2 3/4	1 3/16	1.59 (0.72)
1 3/4	THLDH562	2 7/16	1 3/4	2	2 3/4	1 3/16	1.63 (0.74)
1 13/16	THLDH582	2 1/2	1 3/4	2 1/8	2 7/8	1 1/4	1.65 (0.75)
1 7/8	THLDH602	2 9/16	1 3/4	2 1/4	3	1 5/6	1.87 (0.85)
2	THLDH642	2 3/4	1 3/4	2 3/8	3 1/8	1 3/8	2.17 (0.98)
2 1/16	THLDH662	2 15/16	1 3/4	2 3/8	3 1/8	1 3/8	2.06 (0.93)
2 1/8	THLDH682	2 15/16	1 3/4	2 1/2	3 1/4	1 7/16	2.65 (1.2)
2 3/16	THLDH702	2 15/16	1 3/4	2 1/2	3 1/4	1 1/2	2.46 (1.12)
2 1/4	THLDH722	3 1/8	1 3/4	2 5/8	3 3/8	1 1/2	3.23 (1.47)
2 3/8	THLDH762	3 1/4	1 3/4	2 7/8	3 5/8	1 3/4	3.60 (1.63)

ASME/ANSI B107.100

⚠ WARNING

- Be sure to use a lanyard that has more weight capacity than the tool you are attaching because drop forces are greater than actual tool weight.
- Any tool that weighs more than 5 pounds should be attached to an anchor point such as a work platform or utility bucket rather than the operator.

REVERSIBLE RATCHETING COMBINATION / (BLUE-POINT®)

THBOERM19

Standard Handle , 15° Offset, mm

mm	Stock No.	A	B	C	D	E	Weight, lbs (kg)
6	THBOERM6	16.30	16.3	6.6	3.6	114.3	0.06 (0.03)
7	THBOERM7	16.50	16.4	6.6	3.9	125	0.07 (0.03)
8	THBOERM8	17.80	17.7	6.5	4	135	0.08 (0.04)
9	THBOERM9	19.50	20	7.4	4	150	0.09 (0.04)
10	THBOERM10	21.50	21.9	8	5	160	0.14 (0.06)
11	THBOERM11	22.00	23.9	8.5	5.5	170	0.15 (0.07)
12	THBOERM12	23.50	25	9	5.5	175	0.19 (0.09)
13	THBOERM13	25.00	25.9	10	6.3	180	0.23 (0.1)
14	THBOERM14	27.00	29.9	10	6.5	190	0.29 (0.13)
15	THBOERM15	28.50	31.1	11	7	200	0.31 (0.14)
16	THBOERM16	30.50	33.6	11	7	210	0.36 (0.16)
17	THBOERM17	32.00	36.5	12	7	230	0.45 (0.2)
18	THBOERM18	34.50	38.5	12	8	240	0.50 (0.23)
19	THBOERM19	36.50	38.7	12.9	8.7	250	0.58 (0.26)
21	THBOERM21	39.40	43.2	13.7	9.4	266.7	0.78 (0.35)
22	THBOERM22	41.70	45.7	14.5	9.4	285.8	0.90 (0.41)
24	THBOERM24	46.50	49.5	15.5	11.2	304.8	1.17 (0.53)
25	THBOERM25	47.20	52.8	15.5	11.2	327.2	1.26 (0.57)

THBOER28

Standard Handle , 15° Offset, inches

	Stock No.	A	B	C	D	E	Weight, lbs (kg)
1/4	THBOER8	21/32	21/32	1/4	5/32	4 1/2	0.06 (0.03)
5/16	THBOER10	11/16	11/16	1/4	5/32	5 5/16	0.08 (0.04)
3/8	THBOER12	27/32	7/8	5/16	3/16	6 5/16	0.14 (0.06)
7/16	THBOER14	7/8	15/16	11/32	7/32	6 11/16	0.16 (0.07)
1/2	THBOER16	31/32	1 1/32	13/32	13/32	7 1/16	0.22 (0.1)
9/16	THBOER18	1 1/16	1 3/16	13/32	13/32	7 1/2	0.28 (0.13)
5/8	THBOER20	1 3/16	1 5/16	7/16	7/16	8 1/4	0.36 (0.16)
11/16	THBOER22	1 1/4	1 7/16	15/32	15/32	9 1/16	0.44 (0.2)
3/4	THBOER24	1 7/16	1 17/32	1/2	1/2	9 13/16	0.59 (0.27)
13/16	THBOER26	1 9/16	1 23/32	17/32	17/32	10 1/2	0.75 (0.34)
7/8	THBOER28	1 21/32	1 27/32	9/16	9/16	11 1/4	0.89 (0.4)
15/16	THBOER30	1 27/32	1 31/32	5/8	5/8	12	1.11 (0.5)
1	THBOER32	1 7/8	2 3/32	5/8	5/8	12 7/8	1.26 (0.57)



TH0EXM190B

TH0EX24B

Standard Length, mm, Combination

mm	12	A	B	C	D	E	Weight, lbs (kg)
8	TH0EXM80B	13	17	6	4	4	0.07 (0.03)
9	TH0EXM90B	14	19	6	5	5	0.09 (0.04)
10	TH0EXM100B	15	21	7	5	5	0.105 (0.05)
11	TH0EXM110B	17	23	8	6	6	0.15 (0.07)
12	TH0EXM120B	18	25	8	6	6	0.155 (0.07)
13	TH0EXM130B	20	27	9	6	6	0.21 (0.1)
14	TH0EXM140B	21	29	9	7	7	0.25 (0.11)
15	TH0EXM150B	22	31	10	7	7	0.29 (0.13)
16	TH0EXM160B	24	33	10	7	7	0.335 (0.15)
17	TH0EXM170B	25	35	11	8	8	0.38 (0.17)
18	TH0EXM180B	27	37	12	8	8	0.44 (0.2)
19	TH0EXM190B	28	39	12	9	9	0.51 (0.23)
20	TH0EXM200B	30	41	13	9	9	0.555 (0.25)
21	TH0EXM210B	31	43	13	9	9	0.65 (0.29)
22	TH0EXM220B	33	46	14	10	10	0.77 (0.35)
23	TH0EXM230B	34	47	14	10	10	0.82 (0.37)
24	TH0EXM240B	35	49	15	11	11	0.9 (0.41)
25	TH0EXM250B	37	52	16	11	11	1.12 (0.51)
26	TH0EXM260B	38	53	16	11	11	1.13 (0.51)
27	TH0EXM270B	39	55	17	12	12	1.3 (0.59)
29	TH0EXM290B	42	58	18	12	12	1.43 (0.65)
30	TH0EXM300B	44	61	19	13	13	1.6 (0.73)
32	TH0EXM320B	46	65	19	14	14	1.93 (0.88)
34	TH0EXM340B	48	68	19	14	14	2.1 (0.95)
36	TH0EXM360B	53	74	22	15	15	2.655 (1.2)

Standard Length, inches, Combination

"	12	A	B	C	D	E	Weight, lbs (kg)
1/4	TH0EX8B	13/32	17/32	3/16	5/32	5	0.05 (0.02)
5/16	TH0EX10B	1/2	21/32	7/32	5/32	5 3/4	0.075 (0.03)
11/32	TH0EX11B	17/32	3/4	1/4	3/16	6 1/8	0.085 (0.04)
3/8	TH0EX12B	19/32	13/16	5/16	3/16	6 1/2	0.115 (0.05)
7/16	TH0EX14B	21/32	29/32	5/16	7/32	7 1/4	0.16 (0.07)
1/2	TH0EX16B	3/4	1 1/16	11/32	1/4	8	0.19 (0.09)
9/16	TH0EX18B	27/32	1 3/16	3/8	9/32	8 3/4	0.275 (0.12)
5/8	TH0EX20B	15/16	1 5/16	13/32	9/32	9 1/2	0.32 (0.15)
11/16	TH0EX22B	1 1/32	1 13/32	7/16	5/16	10 1/4	0.39 (0.18)
3/4	TH0EX24B	1 1/8	1 9/16	15/32	11/32	11	0.52 (0.24)
13/16	TH0EX26B	1 3/16	1 21/32	17/32	3/8	11 3/4	0.595 (0.27)
7/8	TH0EX28B	1 9/32	1 13/16	9/16	3/8	12 1/2	0.755 (0.34)
15/16	TH0EX30B	1 3/8	1 29/32	19/32	13/32	13 1/4	0.87 (0.39)
1	TH0EX32B	1 15/32	2 1/32	21/32	7/16	14	1.105 (0.5)
1 1/16	TH0EX34B	1 9/16	2 3/16	11/16	15/32	14 3/4	1.285 (0.58)
1 1/8	TH0EX36B	1 5/8	2 5/16	11/16	17/32	15 7/16	1.405 (0.64)
1 3/16	TH0EX38B	1 3/4	2 7/16	3/4	1/2	16 5/16	1.5 (0.68)
1 1/4	TH0EX40B	1 13/16	2 9/16	3/4	17/32	17 1/8	1.905 (0.86)
1 5/16	TH0EX42B	1 29/32	2 21/32	3/4	9/16	17 13/16	2.105 (0.95)
1 3/8	TH0EX44B	2	2 13/16	3/4	19/32	18 9/16	2.385 (1.08)
1 7/16	TH0EX46B	2 1/16	2 29/32	7/8	19/32	19 1/32	2.635 (1.2)
1 1/2	TH0EX48B	2 5/32	3 1/16	7/8	5/8	20 1/16	3.305 (1.5)
1 9/16	TH0EX50B	2 1/4	3 3/16	7/8	23/32	20 13/16	3.265 (1.48)
1 5/8	TH0EX52B	2 1/32	3 1/32	7/8	1/16	21 9/16	3.69 (1.67)

THXBM1719A

THXB2426A

Double Box, Standard Length, 10° Offset, mm

mm	12	A	C	E	Weight, lbs (kg)
8-10	THXBM810A	12.3-15	6.7-7.7	185	0.14 (0.06)
11-13	THXBM1113A	16.4-19.1	8.3-9.3	219	0.23 (0.1)
12-14	THXBM1214A	17.7-20.4	8.8-9.7	230	0.25 (0.11)
13-15	THXBM1315A	19.1-21.8	9.3-10.2	241	0.32 (0.15)
14-17	THXBM1417A	20.4-25.4	9.8-11.4	248	0.35 (0.16)
16-18	THXBM1618A	23.1-25.9	10.9-11.9	275	0.48 (0.22)
17-19	THXBM1719A	24.5-27.2	11.4-12.3	286	0.48 (0.22)
18-21	THXBM1821A	25.9-29.9	11.9-13.3	303	0.58 (0.26)
22-24	THXBM2224A	31.3-34	13.7-14.7	342	0.88 (0.4)
27-30	THXBM2730A	38.1-42.2	16-17.3	404	1.45 (0.66)

Double Box, Standard Length, 10° Offset, inches

"	12	A	C	E	Weight, lbs (kg)
3/8-7/16	THBX1214A	9/16-21/32	5/16-11/32	7 19/32	0.17 (0.08)
1/2-9/16	THBX1618A	3/4-13/16	11/32-13/16	8 11/16	0.305 (0.14)
5/8-11/16	THBX2022A	29/32-1	7/16-15/32	10 5/32	0.44 (0.2)
3/4-13/16	THBX2426A	1 1/16-5/32	1/2-17/32	11 21/32	0.665 (0.3)
7/8-15/16	THBX2830A	1 1/4-11/32	17/32-9/16	13 1/8	0.935 (0.042)
1 - 1 1/16	THBX3234A	1 13/32-1/2	19/32-5/8	14 19/32	1.28 (0.58)
1 1/4-1 5/16	THBX4042A	1 3/4- 1 27/32	22/32-3/4	17 19/32	2.055 (0.93)

Wrench with Safety Coil –

Secure lanyard attachments need to withstand tough site use, including low temperature, so structural integrity is critical

- Superior Design - No welds to fail
- High Performance - Made from polished stainless steel, they have superior flexibility and shock-absorbing qualities over welded attachments
- Seven sizes available to support wrenches up to 1 ½" or 55mm
- Slides out of the way along the wrenches handle to provide full use of the handle and achieve greatest leverage

⚠ WARNING

- Be sure to use a lanyard that has more weight capacity than the tool you are attaching because drop forces are greater than actual tool weight.
- Any tool that weighs more than 5 pounds should be attached to an anchor point such as a work platform or utility bucket rather than the operator.

WRENCHES

THXSM67A

THXID1618A

Short Handle, 10° Offset, mm

mm	12	A	B	C	Weight, lbs (kg)
6 - 7	**THXSM67A**	9.6 - 10.9	5.7 - 6.2	86	0.04 (0.02)

Midget, 10° Offset, inches

	12	A	C	E	Weight, lbs (kg)
1/4 - 9/32	**THXID1618A**	13/32 - 7/16	5/32 - 3/16	3 13/32	0.045 (0.02)
5/16 - 11/32	**THXID2022A**	15/32 - 1/2	3/16 - 7/32	3 31/32	0.07 (0.03)

ASME/ANSI B107.6-1994

THRXFMS1314B

Flare Nut Double End, mm

mm	6	A	C	E	Weight, lbs (kg)
9 - 11	**THRXFMS911B**	18 - 21	7 - 8	145	0.14 (0.06)
10 - 12	**THRXFMS1012B**	20 - 22	8 - 9	153	0.15 (0.07)
13 - 14	**THRXFMS1314B**	24 - 25	9 - 10	173	0.25 (0.11)
15 - 17	**THRXFMS1517B**	26 - 29	10 - 11	193	0.36 (0.16)
16 - 18	**THRXFMS1618B**	28 - 30	11 - 12	200	0.395 (0.18)
19 - 21	**THRXFMS1921B**	32 - 34	12 - 13	223	0.555 (0.25)

THPW14C

THPWA14A

External Pipe Wrenches

Cast Iron Handle Stock No.	Cast Iron Weight, lbs (kg)	Aluminum Handle Stock No.	Aluminum Weight, lbs (kg)	A	B Max Opening
THPW6C	0.45 (0.2)	–		6	3/4
THPW8C	0.82 (0.37)	–		8	1
THPW10C	1.70 (0.77)	**THPWA10A**	1.11 (0.5)	10	1 1/2
THPW12C	2.58 (1.17)	–		12	2
THPW14C	3.65 (1.66)	**THPWA14A**	2.20 (1)	14	2
		THPWA18A	3.58 (1.62)	18	2 1/2
		THPWA24A	5.65 (2.56)	24	3

THFRDH181



3/8" Drive Torque Adaptors, Non-Spline

Stock No.	Size	A	B	C	D	E	Weight, lbs (kg)
THFRDH101	5/16"	.475	.750	1/4	7/16	2	0.07 (0.03)
THFRDH121	3/8"	.570	.750	5/16	7/16	2	0.084 (0.04)
THFRDH141	7/16"	.655	.750	11/32	7/16	2	0.09 (0.04)
THFRDH161	1/2"	.740	.750	11/32	7/16	2	0.1 (0.05)
THFRDH181	9/16"	.825	.750	3/8	7/16	2	0.1 (0.05)

THBXORM1617

THBXOR1820

Ratcheting Box - Standard Handle - 25° Offset, MM, Blue-Point

mm	12	A	B	E	Weight, lbs (kg)
8-9	**THBXORM89**	18-19.3	6.4-7.6	184.2	0.12 (0.05)
10-11	**THBXORM1011**	21.8-22.1	8.1-8.6	203.2	0.20 (0.09)
12-13	**THBXORM1213**	23.6-26.6	8.9-10.2	222.3	0.26 (0.12)
14-15	**THBXORM1415**	27.2-28.7	10.2-10.9	241.3	0.39 (0.18)
16-17	**THBXORM1617**	31-32	10.9-11.9	260.4	0.51 (0.23)
18-19	**THBXORM1819**	34.5-36.8	12.2-13.2	279.4	0.55 (0.25)

Ratcheting Box - Standard Length - 25° Offset, Inches, Blue-Point

	12	A	C	E	Weight, lbs (kg)
5/16 - 3/8	**THBXOR1012**	23/32 - 7/8	1/4 - 5/16	7.5	0.15 (0.07)
7/16 - 1/2	**THBXOR1416**	7/8 - 31/32	11/32 - 13/32	8.75	0.27 (0.12)
9/16 - 5/8	**THBXOR1820**	1 1/16 - 7/32	13/32 - 7/16	9.75	0.41 (0.19)
11/16 - 3/4	**THBXOR2224**	1 9/32 -7/16	15/32 - 1/2	11	0.64 (0.29)

Four-Way Angle Head, mm

mm	Stock No.	B	D	E	Weight, lbs (kg)
10	**THVSM5210B**	20	6	127	0.09 (0.04)
11	**THVSM5211B**	22	6	137	0.09 (0.04)
12	**THVSM5212B**	24	6	145	0.12 (0.05)
13	**THVSM5213B**	26	6	154	0.16 (0.07)
14	**THVSM5214B**	28	6	164	0.18 (0.08)
15	**THVSM5215B**	30	7	173	0.19 (0.09)
16	**THVSM5216B**	31	7	181	0.23 (0.1)
17	**THVSM5217B**	34	7	191	0.27 (0.12)
18	**THVSM5218B**	36	7	200	0.30 (0.14)
19	**THVSM5219B**	37	7	210	0.33 (0.15)
21	**THVSM5221B**	41	8	228	0.46 (0.21)
22	**THVSM5222B**	44	8	239	0.53 (0.24)
24	**THVSM5224B**	47	8	254	0.60 (0.27)
27	**THVSM5227B**	53	9	283	0.86 (0.39)

THVSM5219B

Four-Way Angle Head, inches

	Stock No.	B	D	E	Weight, lbs (kg)
1/4	**THVS8B**	17/32	3/16	3 11/16	0.04 (0.02)
5/16	**THVS10B**	21/32	3/16	4 1/4	0.05 (0.02)
11/32	**THVS11B**	23/32	7/32	4 17/32	0.07 (0.03)
3/8	**THVS12B**	25/32	7/32	4 27/32	0.08 (0.04)
7/17	**THVS14B**	7/8	7/32	5 13/32	0.10 (0.05)
1/2	**THVS16B**	1	1/4	5 31/32	0.13 (0.06)
9/16	**THVS18B**	1 1/8	1/4	6 9/16	0.16 (0.07)
5/8	**THVS20B**	1 1/4	9/32	7 1/8	0.22 (0.1)
11/16	**THVS22B**	1 3/8	9/32	7 11/16	0.28 (0.13)
3/4	**THVS24B**	1 15/32	9/32	8 9/32	0.34 (0.15)
13/16	**THVS26B**	1 19/32	5/16	8 27/32	0.42 (0.19)
7/8	**THVS28B**	1 23/32	5/16	9 13/32	0.52 (0.24)
15/16	**THVS30B**	1 27/32	11/32	10	0.60 (0.27)
1	**THVS32B**	1 31/32	11/32	10 9/16	0.75 (0.34)

THVS24B

⚠ WARNING

- Be sure to use a lanyard that has more weight capacity than the tool you are attaching because drop forces are greater than actual tool weight.
- Any tool that weighs more than 5 pounds should be attached to an anchor point such as a work platform or utility bucket rather than the operator.

WRENCHES

Combination T and L-Shape Wrenches

- Ergonomic, soft grip handle provides comfort during repetitive tasks
- Allows maximum pressure to be applied when loosening difficult fasteners with both “T” and “L” applications
- Blades constructed from high strength steel and hardened for durability
- Blade tips are black oxide coated to prevent chipping and to help maintain a secure fastener engagement
- Short blade provides maximum torque for tight quarters
- Long blade promotes quick fastener turning in difficult access situations
- Hole in handle for hanging tool or tether
- Color coded handles identify metric and inch sizes at a glance
- Supplied with THRET1Clip that can be used with optional THUNIRET1 Retractable Laynard

Hex, mm

mm	Blue Handle	T-Length, mm	Length, mm	Weight, lbs (kg)
2	**THAWSGM2**	95	152	0.07 (0.03)
2.5	**THAWSGM2.5**	95	152	0.08 (0.04)
3	**THAWSGM3**	98	152	0.09 (0.04)
4	**THAWSGM4**	98	187	0.11 (0.05)
5	**THAWSGM5**	117	187	0.20 (0.09)
6	**THAWSGM6**	117	246	0.28 (0.13)
8	**THAWSGM8**	117	246	0.40 (0.18)
10	**THAWSGM10**	124	248	0.53 (0.24)

THAWSGM6

Hex, SAE

SAE	Red Handle	T-Length, inches	Length, inches	Weight, lbs (kg)
3/32	**THAWSG06**	3 7/8	6	0.08 (0.04)
6/64	**THAWSG07**	3 7/8	6	0.08 (0.04)
1/8	**THAWSG08**	3 7/8	6	0.08 (0.04)
9/64	**THAWSG09**	3 7/8	6	0.10 (0.05)
5/32	**THAWSG10**	3 7/8	7 3/8	0.11 (0.05)
3/16	**THAWSG12**	4 3/4	7 3/4	0.20 (0.09)
7/32	**THAWSG14**	4 3/4	7 3/4	0.23 (0.1)
1/4	**THAWSG16**	4 3/4	9 5/8	0.28 (0.13)
5/16	**THAWSG20**	4 3/4	9 5/8	0.39 (0.18)
3/8	**THAWSG24**	4 3/4	9 5/8	0.51 (0.23)

THAWSGM14

Adjustable Wrenches

Stock No.	A Inches (mm)	Length, Inches (mm)	Weight, lbs (kg)
THGAJ4A	4 (108)	1/2 (13)	0.14 (0.06)
THGAJ6A	6 (160)	1 (25.4)	0.34 (0.15)
THGAJ8A	8 (210)	1 1/8 (29)	0.67 (0.3)
THGAJ10A	10 (260)	1 9/32 (33)	1.04 (0.47)
THGAJ12A	12 (310)	1 1/2 (38)	1.69 (0.77)
THGAJ15A	15 (385)	1 19/32 (43)	2.78 (1.26)
THGAJ18A	18 (450)	2 1/16 (52)	4.01 (1.82)
THGAJ15A	15 (385)	1 19/32 (43)	2.78 (1.26)
THGAJ18A	18 (450)	2 1/16 (52)	4.01 (1.82)

THGAJ15A

Screw is staked to prevent accidental loosening

Chain Wrenches

Stock no.	A	B	C	Weight, lbs (kg)
THCW12A	16	4	12	1.85 (0.84)
THCW15A	19	5	15	2.65 (1.2)
THCW24A	23	6	24	4.10 (1.86)

THCW24A

Adjustable Hook Spanners

- Services collars, rings and bearings
- Single jaw and roll pin construction with industrial finish
- Make sure jaw hook is properly positioned when in use

Stock No.	A	B	C	D	Weight, lbs (kg)
THAHS300B	3/4-2	1/8	6 3/8	11/32	0.29 (0.13)
THAHS301B	1 1/4-3	5/32	8 1/8	13/32	0.49 (0.22)
THAHS304B	2-4 3/4	3/16	11 3/8	15/32	0.98 (0.44)
THAHS307B	4 1/2 - 6 1/2	1/4	12 1/8	15/32	1.06 (0.48)

THAHS304B

Adjustable Pin Spanners

- Removes rings, collars and lock nuts
- Make sure jaw hook is properly positioned when in use

Stock No.	A	B	C	D	E	Weight, lbs (kg)
THAPS351B	3/4-2	1/8	6 3/8	1/8	11/32	0.28 (0.13)
THAPS357B	1 1/4-3	3/16	8 1/8	3/16	11/32	0.48 (0.22)
THAPS363B	2-4 3/4	1/4	11 3/8	1/4	15/32	0.91 (0.41)
THAPS366B	4 1/2 - 6 1/2	1/4	12 1/8	3/8	15/32	1.08 (0.49)

THAPS363B

Adjustable Face Pin Spanners

- For servicing seal and packing nuts on hydraulic cylinders.

Stock No.	A	B	C	D	Weight, lbs (kg)
THAFS482B	6 3/8	2	3/16	5/32	0.32 (0.15)
THAFS483B	8 1/4	3	1/4	3/16	0.61 (0.28)
THAFS484B	10 3/8	4	5/16	1/4	0.99 (0.45)

THAFS484B

⚠ WARNING

- Be sure to use a lanyard that has more weight capacity than the tool you are attaching because drop forces are greater than actual tool weight.
- Any tool that weighs more than 5 pounds should be attached to an anchor point such as a work platform or utility bucket rather than the operator.

TORQUE WRENCHES / SCREWDRIVERS

Techwrench

- Torque accuracy TECH1, 2 and 3 ratchet head models: 1% CW, 1.5% CCW 2% CW, 3% CCW from 10 to 19% F.S. 4% CW, 8% CCW from 5 to 9% F.S. (TECH2 only)
- Manual peak store, recall, clear and print functions
- Memory capacity: 1000 peak readings
- TechLog™ download software CD included
- Excel® Download Template with basic statistics
- Date/time Excel download template (wrench connected to PC)
- Serial RS232, with selectable 1200 to 19.2K baud rate
- Serial cable: 6' with 9 pin PC interconnect included
- Dual 80® technology on all 72 and 80 tooth

Applications:

- Automotive service: printout provides assurance that lug nuts, head bolts, etc. have been tightened to specification
- Assembly operations: gather data to manage quality
- Manufacturing ISO and SPC®: generate statistics for technical files and process auditing
- Military: document compliance with maintenance schedules and inspections
- Aviation: include torque data in maintenance reports

	Stock No.	Head Style	Gear Teeth	Swing Arc	Range, in lb	Range, ft lbs	Range, Nm	Head Depth, inches	Head Width, inches	Length, inches	Weight, lbs (kg)
3/8	**THTECH2R100**	Sealed Fixed Ratchet	80	4.5°	60-1,200	5-100	6.7-135	5/8	1 5/32	17 1/4	3.20 (1.45)
1/2	**THTECH3R250**	Sealed Fixed Ratchet	80	4.5°	300-3,000	25-250	34-339	3/4	1 5/8	26 1/4	5.12 (2.32)



Adjustable Click-Type Torque Wrenches

- Certificate of Calibration. A Certificate of Calibration (right) is packed with every QD series torque instrument. Actual certification readings and individual instrument serial number are included. Each torque instrument, as calibrated at the factory, is certified to meet the accuracy specified in ASME® and was calibrated on a torque standard traceable to the National Institute of Standards Technology (NIST®)
- Accuracy. All QD series torque instruments are accurate to ±4% clockwise and ±6% counterclockwise from 20% of full scale to full scale
- Long Life Ratchet Head. QD series torque instruments feature the Snap-on® high strength sealed ratchet head. Sealed ratchet heads keep out dirt and moisture while being virtually maintenance free. Applies to all QD series ratchet head models. (U.S. Patent 6,125,722) applies to 1/4, 3/8 and 1/2" drive ratchet head models only
- Long Term Protection. Each instrument includes a storage case

Square Drive (Inches)	Stock No.	Head Style	Gear Teeth	Swing Arc	Range, min	Range, max	Increments	Length, inches	Head Width, inches	Head Depth, inches	Weight, lbs (kg)
U.S. Torque Instruments (ft lb)											
3/8	**THQD2FR75**	Flex Ratchet	36	10°	5 ft lb	75 ft lb	.5 ft lb	15 3/4	1 5/32	9/16	3.28 (1.49)
3/8	**THQD2R100**	Fixed Ratchet	36	10°	20 ft lb	100 ft lb	.5 ft lb	15 9/16	1 5/32	9/16	3.30 (1.5)
1/2	**THQD3R250**	Fixed Ratchet	36	10°	50 ft lb	250 ft lb	1 ft lb	24 3/16	1 5/8	3/4	4.80 (2.18)
Newton Meter Torque Wrenches/±4% Accuracy											
3/8	**THQD2RN50**	Fixed Ratchet	36	10°	10 N•m	50 N•m	.5 N•m	15 9/16	1 5/32	9/16	3.28 (1.49)
3/8	**THQD2RN100**	Fixed Ratchet	36	10°	20 N•m	100 N•m	.5 N•m	15 9/16	1 5/32	9/16	3.27 (1.48)
1/2	**THQD3RN350**	Fixed Ratchet	36	10°	70 N•m	350 N•m	2 N•m	24 3/16	1 5/8	3/4	4.87 (2.21)



Hard Handle Instinct Screwdrivers

Tip	Stock No.	A	B	C	D	Weight, lbs (kg)
Flat Tip	**THSHD2AR**	.035	7/32	2 13/16	6 15/16	0.25
	THSHD2AR	.040	1/4	3 15/16	8 27/32	0.5
	THSHD6AR	.050	5/16	5 15/16	10 27/32	0.52
	THSHD8AR	.055	3/8	7 29/32	13 13/32	0.8
Phillips	**THSHDP31AIRR**	#1	3/16	2 31/32	7 1/8	0.2
	THSHDP42AIRR	#2	1/4	3 31/32	8 7/8	0.52
	THSHDP63AIRR	#3	5/16	5 29/32	10 13/16	0.25
	THSHDP64AIRR	#4	3/8	6	11 1/2	0.5

Electronic Miniature Screwdrivers

- Feature rotating handles making them ideal for precise detail work

Tip	Stock No.	A	B	C	D	Weight, lbs (kg)
Flat Tip	**THSGDE214**	1.5	3/32	2	5 3/4	0.04
	THSGDE220	2.0	3/32	2	5 3/4	0.04
	THSGDE225	2.5	3/32	2	5 3/4	0.04
	THSGDE230	3.0	1/8	2	5 3/4	0.04
Phillips	**THSGDEP20**	#00	1/8	2	5 3/4	0.04
	THSGDEP200	#0	1/8	2	5 3/4	0.04

THFSNE3-22SM

Claw Hammers

- Cushion grip handle provides greater comfort and safety
- Durable one piece design for a long lasting hammer

Stock No.	Grip Length, inches	Overall Length, inches	Weight, lbs (kg)
THFSNE3-22SM	7 1/4	16	2.13 (.97)

THHBBD24

HBBD Series Dead Blow Hammers

- Freeflowing steel canister shot design to improve dead blow action while reducing rebound
- Soft grip handle with ribbed, textured elastomer grip prevents hand slippage
- Composite handle shank improves balance while defusing shock and dampening vibration

Stock No.	Nominal Weight, oz	Head Length, inches	Face Diameter, inches	Length, inches	Weight, lbs (kg)
THHBBD8	8	4	1	11 5/8	1.03 (0.47)
THHBBD16	16	4 3/8	1 1/4	12 1/4	1.42 (0.64)
THHBBD24	24	4 3/4	1 3/8	12 3/4	1.97 (0.89)
THHBBD32	32	5 3/4	1 3/4	13 5/8	2.80 (1.27)
THHBBD40	40	5 3/4	1 3/4	15 1/8	2.90 (1.32)

Heavy Duty Sledge Hammers

Stock No.	Description / Style	Nominal Weight (lbs)	Overall Length (inches)	Face Diameter (inches)	Weight, lbs (kg)
THBC110B	Dead Blow Sledge Hammer	8	30	2 3/4	8.94 (4.06)
THBD6ESG	Heavy-Duty Fiberglass Handle Sledge Hammer	6	18	1 5/8	6.86 (3.11)
THBD10ESG	Heavy-Duty Fiberglass Handle Sledge Hammer	10	32	2	12.20 (5.53)

Heavy Duty Fiberglass Handle Hammers

- Dampens vibration and provides strength and safety
- Handle is resistant to dry rot, warp and splintering
- Fiberglass handle dampens vibration and provides extra strength and safety
- Handle is epoxy welded to hammer head and will withstand 8,000 lbs of separation force
- Comfortable, nonslip handle grip
- Materials will resist most shop chemicals

THHBFE48

HBFE Series Dead Blow Hammers

- Free flowing shot design to improve dead blow action while reducing rebound
- Compact head has larger surface striking area and heavier caps to improve delivered force by as much as 40%

Stock No.	Nominal Weight, oz	Head Length, inches	Face Diameter, inches	Length, inches	Weight, lbs (kg)
THHBFE16	16	3 1/4	1 9/16	12	1.19 (0.54)
THHBFE24	24	3 3/4	1 3/4	12 3/4	1.43 (0.65)
THHBFE32	32	4 1/4	2	13 1/2	2.00 (0.91)
THHBFE48	48	4 3/4	2 1/4	15	2.99 (1.36)
THHBFE56	56	5 7/16	2 3/4	15 3/4	3.69 (1.67)

THHBR15

Brass (Fiberglass Handle)

- Nonsparking/nonmarring surface for many applications
- Brass head absorbs blow and reduces rebound
- Flat surface for even distribution of blow
- Comfortable, nonslip handle grip

Stock No.	Nominal Weight, oz	Length, inches	Tethered Weight, lbs (kg)
THHBR15	1 1/2	12	1.95 (0.88)
THHBR25	2 1/2	12	2.75 (1.25)
THHBR4	4	12	4.25 (1.93)

THBD6ESG

THBPN32B

THBC4SG

Stock No.	Description	Nominal Weight, lbs	Striking Face Diameter, inches	Handle Length, inches	Overall Length, inches	Tethered Weight, lbs (kg)
THBPN32B	Dead Blow	2			16	2.55 (1.16)
THBC4SG	Cross Peen	4	1 1/2	12	14	4.68 (2.12)
THBD4SG	Engineer	4	1 1/2	12	14	4.70 (2.13)
THHD4SG	Hand Drilling	4	1 1/2	8 3/4	10 3/4	4.20 (1.91)

WARNING

- Be sure to use a lanyard that has more weight capacity than the tool you are attaching because drop forces are greater than actual tool weight.
- Any tool that weighs more than 5 pounds should be attached to an anchor point such as a work platform or utility bucket rather than the operator.

MISCELLANEOUS TOOLS

TH388CF

Diagonal Cutter

Stock No.	Description / Style	Overall Length (inches)	Jaw Length (inches)	Weight, lbs (kg)
THTH85BCP	Diagonal Cutter	5	9/16	0.20 (0.09)
TH86CF	Diagonal Cutter	7 3/8	13/16	0.43 (0.2)
TH87CF	Diagonal Cutter	6 5/16	3/4	0.64 (0.29)
TH388CF	High Leverage PowerEdge™ Cutter	8 5/16	1 1/16	0.76 (0.34)

TH95BCP

Needle Nose Pliers

Stock No.	Description / Style	Overall Length (inches)	Jaw Length (inches)	Weight, lbs (kg)
TH95BCP	Needle Nose Pliers	6	1 11/16	0.26 (0.12)
TH96CF	Needle Nose Pliers	8	2 1/4	0.51 (0.23)
TH97CF	Needle Nose Pliers	8	3 3/16	0.49 (0.22)
TH196CF	Needle Nose Pliers	8	2 1/4	0.49 (0.22)

TH137CF

THHL138ACP

Combination Slip Joint Pliers

Stock No.	Description / Style	Overall Length (inches)	Jaw Length (inches)	Weight, lbs (kg)
TH137CF	Combination Slip Joint Pliers - Heavy Duty	8 3/16	27/64	0.73 (0.33)
THHL138ACP	High Leverage Combination	7 7/8	1 1/16	0.66 (0.3)

TH59AHLP

Linesman's Pliers

Stock No.	Jaw Width	Overall Length (inches)	Weight, lbs (kg)
TH59AHLP	1/2	9 1/2	.066(.30)

THAWP120

Tongue and Groove

Stock No.	Description / Style	Overall Length (inches)	Jaw Opening / Capacity	Jaw Positions	Weight, lbs (kg)
THAWP45	Straight Serrated	4 3/4	1/2	3	0.15 (0.07)
THAWP65	Straight Serrated	7	7/8	5	0.40 (0.18)
THAWP120	Adjustable Joint Pliers	12 3/4	2 3/16	7	1.57 (0.71)
THAWP160	Straight Serrated	16 3/4	3 3/16	8	3.03 (1.37)

THLP7WR

THLP6LN

THLP10WR

Locking Pliers

Stock No.	Description / Style	Overall Length (inches)	Jaw Opening / Capacity	Weight, lbs (kg)
THLP5WR	Locking Pliers - Curved Jaw w/cutter	5	1 5/32	0.39 (0.18)
THLP7WR	Locking Pliers - Curved Jaw w/cutter	7	1 5/8	0.84 (0.38)
THLP6LN	Locking Pliers - Long Nose	6	2 1/8	0.44 (0.2)
THLP10WR	LP Series Locking Pliers	10	2 7/16	1.41 (0.64)

THPRH57A

Interchangeable Tip/Convertible Pliers

Stock No. Internal	Convertible	Overall Length (inches)	Ring Size Range Inches	Weight, lbs (kg)
THPRH56A	•	6 3/8	Internal 1/4 - 1 External 1/8-1	0.34 (0.15)
THPRH57A	•	8	Internal 3/8 - 2 External 1/4-2	0.56 (0.25)
THPRC65A	•	10	Internal 1 13/64 -4 External 1 1/3 - 4	1.22 (0.55)

THPWC22B

THPWCS9

Wire Stripper

Stock No.	Description	Overall Length (inches)	Strips AWG Sizes	Application	Weight, lbs (kg)
THPWC22B	Automatic Wire Stripper with Cutter	7 1/4	12, 14, 16, 18, 20	Strips PVC, THHN, and THWN	0.26 (0.12)
THPWCS9	Wire Stripper/ Cutter/ Crimper/ Bolt Cutter	8 3/4	Stranded Wire: 8, 10 Solid Wire: 20, 16	-	1.00 (0.45)

TH29CF

Crimpers

29CF Cold Forged Wire Terminal Crimping Tool.

- Cold formed heat treated rivet for smooth action and long life
- Precision machined joint and cutting edges, hardened wire cutter with “Knife to Anvil” design, never needs sharpening

Stock No.	Description	Overall Length (inches)	Crimps	Weight, lbs (kg)
TH29CF	Terminal Crimping Pliers with Cutter	9 3/8	10, 12, 14, 16, 18, 20, 22 AWG Insulated and Noninsulated	0.80 (0.36)

THWTR1A

Wire Twister/Stripper

Stock No.	Description / Style	Overall Length (inches)	Jaw Opening / Capacity	Weight, lbs (kg)
THWTR1A	Reversible Wire Twister	8 3/4	0.041	0.61 (0.28)

THPWC80A

Cable Cutter

Stock No.	Description	Overall Length (inches)	Weight, lbs (kg)
THPWC80A	For cutting battery cables and other soft metal cables. Vinyl covered Handles	7 1/2	0.57 (0.26)

⚠ WARNING

- Be sure to use a lanyard that has more weight capacity than the tool you are attaching because drop forces are greater than actual tool weight.
- Any tool that weighs more than 5 pounds should be attached to an anchor point such as a work platform or utility bucket rather than the operator.

MISCELLANEOUS TOOLS

Pry Bars - Multiposition

- Each prybar features 17 incremental angles of 15° to provide great flexibility
- High leverage design with smooth radius head provides maximum leverage when lifting
- Manufactured from special alloy steel, precision forged and heat treated for strength and durability
- Industrial finish helps protect against corrosion

Stock No.	Tip Width, Inches	Length, Inches	Weight, lbs (kg)
THPBMP8A	1/2	8	0.44 (0.2)
THPBMP12A	5/8	12	1.07 (0.49)
THPBMP16A	5/8	16	1.32 (0.6)
THPBMP24A	1	24	3.56 (1.61)
THPBMP36A	1	36	4.86 (2.2)

THHSG319

THHS50

THHS5A

Saws

- Each prybar features 17 incremental angles of 15° to provide great flexibility
- High leverage design with smooth radius head provides maximum leverage when lifting
- Manufactured from special alloy steel, precision forged and heat treated for strength and durability
- Industrial finish helps protect against corrosion

Stock No.	Description	Length, Inches	Blade size	Weight, lbs (kg)
THHSG319	Hacksaw Frame	14 3/4	12	1.25 (0.57)
THHS5A	Mini-Hacksaw Frame	8 1/4	10" (250mm)	0.28 (0.13)
THHS50	Quick Cutter hand Saw - Includes 3 blades	-	-	0.50 (0.23)

THNPB124B

Wrecking Bar

- Slotted claw on “gooseneck” end and a chisel configuration on

Stock No.	Length, Inches	Sq. Stock, inches	Length, inches	Weight, lbs (kg)
THNPB124B	14 3/4	3/4	24	3.35 (1.52)

THSGF8R

Bastard Cut Individual Files

Type	Stock No.	Cut	Length, inches	Weight, lbs (kg)
Round Files	**THSGF8R**	—	8	0.26 (0.12)
Mill Files	**THSGF8MA**	—	8	0.30 (0.14)
Mill Files	**THSGF10MA**	—	10	0.55 (0.25)
Three Square File	**TH6T**	5 1/2	6	0.13 (0.06)

THSGF4MA

Miniature Files

Stock No.	Description	Weight, lbs (kg)
THSGF4MA	Hand	0.14 (0.06)
THSGF4W	Warding	0.10 (0.05)
THSGF4HR	Half Round	0.10 (0.05)
THSGF4SQ	Square	0.10 (0.05)
THSGF4R	Round	0.10 (0.05)
THSGF4T	Triangular, Slim Taper	0.10 (0.05)

THCSA12C

Scraper

Stock No.	Description	Overall Lenght (Inches)	Blade Width Inches	Weight, lbs (kg)
THCSA8C	Rigid Carbon Scraper	7 5/8	7/8	0.34 (0.15)
THCSA12C	Rigid Carbon Scraper	12 7/8	1	0.495 (0.22)
THCSA14C	Rigid Carbon Scraper	14	1 1/2	0.57 (0.26)

THPK52A

THPKB52A

Putty Knives/Scrapers

- Full length steel blades for strength and durability
- Soft molded rubber handles maximize hand grip, are easy to clean and resistant to most solvents
- Broad hilt design helps protect against hand slipping when scraping

Stock No.	Blade Length, inches	Blade Width, inches	Blade Style	Weight, lbs (kg)
THPK50A	3 1/2	2	Flexible	0.19 (0.09)
THPK52A	3 19/32	1 1/4	Flexible	0.18 (0.08)
THPK53A	3 19/32	1 1/4	Stiff Chisel	0.23 (0.1)

Brass Putty Knives/Scrapers

- Spring tempered, solid brass blades are nonmarring, nonsparking, nonmagnetic and noncorrosive
- Soft molded rubber handles maximize hand grip, are easy to clean and are resistant to most solvents
- Broad hilt design helps protect against hand slipping when scraping
- Stiff blade style

Stock No.	Handle Length, inches	Blade Length, inches	Blade Width, inches	Weight, lbs (kg)
THPKB50A	4 7/8	3 1/2	2	0.26 (0.12)
THPKB52A	4 7/8	3 19/32	1 1/4	0.23 (0.1)
THPKB53A	4 7/8	3 19/32	1 1/4	0.25 (0.11)

THTPMA25EM

THUTK100

THPCD2010247

THFSN25100

THPPC5A

THGA52G

THYA728A

Miscellaneous

Stock No.	Description	Overall Length	Weight, lbs (kg)
THTPMA25EM	25 Ft Measuring Tape	-	1.45 (0.66)
THFSN25100	Stabila 10" Torpedo Level	10"	1 (0.45)
THUTK100	Heavy-Duty Utility Knife	7 ¼"	0.513 (0.23)
THPCD2010247	Tools/Height Flashlight Class 1 Division	7 ½"	0.65 (0.29)
THPPC5A	Punch and Chisel Holder	6 15/16"	0.6 (0.27)
THYA728A	Grease Gun, 6000 PSI Lever-Type W/18" Hose	-	4.14 (1.88)
THGA52G	Tools/Height Inspection Mirror, 1 3/16" x 1 1/2"	10"	0.2 (0.09)

⚠ WARNING

- Be sure to use a lanyard that has more weight capacity than the tool you are attaching because drop forces are greater than actual tool weight.
- Any tool that weighs more than 5 pounds should be attached to an anchor point such as a work platform or utility bucket rather than the operator.

1000V TOOLS

Snap-on Industrial Tools@Height POWER-SAFE tools comply with EN60900. They are tested to 10,000V and marked with the 1000V symbol. A sample of each type of tool from every production run is dropped tested, stripped-down, inspected and certified.

Strong, durable and high quality, Snap-on POWER-SAFE pliers and cutters feature an isolated lanyard attachment point integrated with the handle.

Single Open-End Wrenches, Standard Handle, mm

Stock No.	Description	Open End Width	Open End Depth	Length inches	Weight lbs
THOEM10kV	1000V Insulated Wrench 10mm O/E	1	5/16	6 3/4	0.15
THOEM11kV	1000V Insulated Wrench 11mm O/E	1 1/16	5/16	6 3/4	0.15
THOEM12kV	1000V Insulated Wrench 12mm O/E	1 1/8	5/16	7	0.2
THOEM13kV	1000V Insulated Wrench 13mm O/E	1 1/4	5/16	7	0.2
THOEM14kV	1000V Insulated Wrench 14mm O/E	1 3/8	5/16	7 3/8	0.2
THOEM15kV	1000V Insulated Wrench 15mm O/E	1 3/8	5/16	7 9/16	0.2
THOEM16kV	1000V Insulated Wrench 16mm O/E	1 1/2	3/ 8	7 7/8	0.3
THOEM17kV	1000V Insulated Wrench 17mm O/E	1 5/8	3/ 8	8 9/16	0.35
THOEM18kV	1000V Insulated Wrench 18mm O/E	1 5/8	3/ 8	8 9/16	0.35
THOEM19kV	1000V Insulated Wrench 19mm O/E	1 3/4	3/ 8	8 7/8	0.35
THOEM6kV	1000V Insulated Wrench 6mm O/E	5/ 8	7/32	5 9/16	0.1
THOEM7kV	1000V Insulated Wrench 7mm O/E	5/ 8	7/32	5 9/16	0.1
THOEM8kV	1000V Insulated Wrench 8mm O/E	13/16	5/16	6	0.1
THOEM9kV	1000V Insulated Wrench 9mm O/E	15/16	5/16	6 3/8	0.15

Single Box-End Wrenches, Standard Handle, mm

Stock No.	Description	Box End Width	Box End Depth	Length inches	Weight lbs
THXOM10kV	1000V Insulated Wrench 10mm Ring	3/4	3/8	8 1/2	0.25
THXOM11kV	1000V Insulated Wrench 11mm Ring	13/16	3/8	8 1/2	0.25
THXOM12kV	1000V Insulated Wrench 12mm Ring	13/16	3/8	8 1/2	0.25
THXOM13kV	1000V Insulated Wrench 13mm Ring	15/16	13/32	8 1/2	0.3
THXOM14kV	1000V Insulated Wrench 14mm Ring	1	13/32	8 1/2	0.3
THXOM15kV	1000V Insulated Wrench 15mm Ring	1 1/16	15/32	9 1/2	0.35
THXOM16kV	1000V Insulated Wrench 16mm Ring	1 1/8	15/32	10	0.4
THXOM17kV	1000V Insulated Wrench 17mm Ring	1 3/16	1/2	10	0.45
THXOM18kV	1000V Insulated Wrench 18mm Ring	1 1/4	1/2	10 1/2	0.5
THXOM19kV	1000V Insulated Wrench 19mm Ring	1 5/16	9/16	10 1/2	0.55
THXOM6kV	1000V Insulated Wrench 6mm Ring	1/2	1/4	7 3/4	0.2
THXOM7kV	1000V Insulated Wrench 7mm Ring	9/16	3/8	8	0.2
THXOM8kV	1000V Insulated Wrench 8mm Ring	5/8	3/8	8 1/4	0.2
THXOM9kV	1000V Insulated Wrench 9mm Ring	11/16	3/8	8 1/4	0.2

T-Handle Hex Wrenches, mm

Stock No.	Description	Length inches	T handle Length (inches)	Weight lbs
THAWMCG10kV	1000V Insulated T-Handle Hex Wrench 10mm	6	6 1/2	0.8
THAWMCG3kV	1000V Insulated T-Handle Hex Wrench 3mm	6	4 1/2	0.25
THAWMCG4kV	1000V Insulated T-Handle Hex Wrench 4mm	6	4 1/2	0.3
THAWMCG5kV	1000V Insulated T-Handle Hex Wrench 5mm	6	5 1/2	0.45
THAWMCG6kV	1000V Insulated T-Handle Hex Wrench 6mm	6	5 1/2	0.45
THAWMCG8kV	1000V Insulated T-Handle Hex Wrench 8mm	6	6 1/2	0.75

Adjustable Wrenches

Stock No.	Description	Length inches	Max Opening inches	Weight lbs
THAD12AkV	1000V 12" Adjustable Wrench	13 7/16	1 11/32	1.85
THAD6AkV	1000V 6" Adjustable Wrench	7 1/2	25/32	0.4

Saws

Stock No.	Description	OAL inches	Weight lbs
TH862kV	1000V Insulated Hacksaw 12"	20	1.75
TH863kV	1000V Insulated Junior Hacksaw	11 1/2	0.4

Screwdrivers

Stock No.	Description	Tip Size inches	Shank Diameter	Blade Length inches	OAL inches	Weight lbs
THSD869kV	1000V S/Driver 0.5 x 3.5 x 100mm	.020 x 1/8	3/16	3 3/4	6 3/4	0.5
THSD870kV	1000V S/Driver 0.8 x 4 x 75mm	.032 x 5/32	1/4	3 1/4	7 1/4	0.15
THSD871kV	1000V S/Driver 1.0 x 5 x 75mm	.040 x 3/16	1/4	3 1/4	7 1/2	0.15
THSD872kV	1000V S/Driver 1.2 x 6.5 x 125mm	.047 x 1/4	5/16	6	10	0.25
THSD873kV	1000V S/Driver 1.2 x 8 x 150mm	.047 x 5/16	5/16	6	10 1/2	0.35
THSD874kV	1000V S/Driver 1.6 x 10 x 200mm	.063 x 3/8	3/8	8 1/2	13 1/4	0.6
THSDP875kV	1000V S/Driver PH1 x 75mm	P1	1/4	3 1/4	7 1/4	0.15
THSDP876kV	1000V S/Driver PH2 x 100mm	P2	5/16	5	9	0.25
THSDP877kV	1000V S/Driver PH3 x 150mm	P3	3/8	6 1/2	10 3/4	0.35
THSDZ878kV	1000V S/Driver PZ1 x 75mm	PZ1	1/4	3 1/4	7 1/4	0.15
THSDZ879kV	1000V S/Driver PZ2 x 100mm	PZ2	5/16	5	9	0.25
THSDZ880kV	1000V S/Driver PZ3 x 150mm	PZ3	3/8	6 1/2	10 3/4	0.35

Pliers

Stock No.	Description	Number of Jaw Positions	Jaw Thickness inches	Jaw Length inches	Jaw Capacity inches	OAL inches	Weight lbs
TH2619kV	1000V 9"/250mm Waterpump Pliers	7	-	-	2 1/2	11	0.9
TH497CFkV	1000V 90deg Bent-Nose Pliers	-	-	-	2 5/8	8	0.65
TH57AHLPkV	1000V 7"/190mm Linesman Pliers	-	1/2	-	-	9	0.85
TH59AHLPkV	1000V 9"/235mm Linesman Pliers	-	1/2	-	-	10 3/4	1.35
TH807kV	1000V Wire-Stripping Pliers	-	-	-	10-22 AWG	7 1/2	0.4
TH84CFkV	1000V Diag Cutters 4"/120mm	-	-	3/8	-	5 5/8	0.3
TH87CFkV	1000V 7"/190mm Diag Cutters	-	-	13/16	-	8 13/16	0.85
TH91ACPkV	1000V 9"/235mm Adjustable Pliers	5	-	-	1 3/8	10 3/4	1
TH95CFkV	1000V 5"/150mm Needle Nose Pliers	-	-	1 1/16	-	7 1/2	0.4
THPWC14kV	1000V Wire Stripper/Cutter/Crimper 8 3/4"/225mm	-	-	-	8-22 AWG	10	0.55
THPWC80kV	1000V 7"/190mm Cable Cutters	-	-	-	-	9	0.75

Hammer

Stock No.	Description	Length inches	Tip Size inches	Weight lbs
THHBPT16kV	1000V Insulated Hammer, 24oz, Nylon Faces (Interchangeable)	12 7/8	1 1/16	1.7

⚠ WARNING

- Be sure to use a lanyard that has more weight capacity than the tool you are attaching because drop forces are greater than actual tool weight.
- Any tool that weighs more than 5 pounds should be attached to an anchor point such as a work platform or utility bucket rather than the operator.

UNIVERSAL ATTACHMENT POINTS

PYT1X3.5
MAX LOAD:
5 POUNDS

PYT5225
MAX LOAD:
2 POUNDS

PYT5225NC
MAX LOAD:
2 POUNDS

PYTQSXL PYTQSL PYTQSM PYTQSS

PYTPCOIL

D-Rings

- D-Rings combined with Quick Wrap Tape can create attachment points on tools that are otherwise impossible to tether.
- Non-conductive variant also available (PYT5225N)
- Third-party load rated for 5 pounds and 2 pounds

Stock No.	Description	Quantity
PYT522510PK	D-Ring 0.5" X 2.25"	10
PYT5225100PK	D-Ring 0.5" X 2.25"	100
PYT5225NC10	D-Ring 0.5" X 2.25" Non-Conductive	10
PYT5225NC100	D-Ring 0.5" X 2.25" Non-Conductive	100
PYT1X3.510PK	D-Ring 1" X 3.5"	10
PYT1X3.550PK	D-Ring 1" X 3.5"	50

Quick Spins

- The unique, patented Quick Spins accommodate a wide selection of tools, making them tether-ready in seconds
- Reusable, and suitable for non-conductive use, the tangle-resistant spin tops make Quick Spins an outstanding drop prevention solution that doesn't deface tools
- Body is made from a Thermoplastic Rubber and Polyester material (TPU), while the spin tops are made of polyacetal and black carbon (POM)

Stock No.	Diameter (Inches)	Load Rating (Pounds)	Quantity
PYTQSS10PK	0.6	1, .5	10
PYTQSM10PK	0.8	1, .5	10
PYTQSL10PK	1	1, .5	10
PYTQSXL10PK	1.2	1, .5	10
PYTQSP10PK	0.3	No Rated	10
PYTPCOIL10PK	0.3	No Rated	10
PYTQSPM10PK	0.5	No Rated	10
PYTQSMCOL10	0.5	No Rated	10

Tool Cinch Attachments

- Patent-pending Tool Cinch Attachment Points are third-party load rated for 35 pounds.
- The PYT1ATTMD and PYT2ATTMD feature stabilization wings that can be taped down using Quick Wrap Tape to create a strong connection that won't slide off a tool.
- With a Tool Cinch, it's possible to create attachment points on heavy, difficult to tether tools and equipment.
- The PYTATTMD is perfect for tools with closed handles, or pre-drilled holes.
- The PYT1ATTMD is designed to be used with tools that do not have pre-drilled holes or closed handles. It can even be used on tools with triggers such as grinders, bandsaws, or drills.
- The VR-2ATTACHMD is intended to be used on long cylindrical tools where there is at least 5.5 inches of space available for the stabilization wings to be taped down.

PYT2ATTMD

PYT1ATTMD

PYTATTMD

PYT2ATTHD10P

Stock No.	Description	Max Load lbs.	Quantity
PYT2ATTHD10P	Tool Cinch Heavy Duty	80	10
PYTATTMD10P	Tool Cinch Medium Duty	35	10
PYT1ATTMD10P	Tool Cinch Single Wing Medium Duty	35	10
PYT2ATTMD10P	Tool Cinch Dual Wing Medium Duty	35	10

PYTHDYLNI

Quick Wrap Tape

- Quick Wrap Tape is made from a self-fusing silicone rubber, and features inner fiberglass webbing reinforcement.
- Quick Wrap Tape is intended to be used with D-Rings and Tool Cinch Attachment Points.

Stock No.	Length (Inches)	Width (Inches)	Color	Quantity
PYTQWHDBLU	108	1	Blue	1
PYTHDHBLU110P	108	1	Blue	10
PYTHDBLU1CAS	108	1	Blue	240
PYTHDBLU1X2	216	1	Blue	1
PYTHDGRN1	108	1	Green	1
PYTHDGRN110P	108	1	Green	10
PYTHDGRN1CAS	108	1	Green	240
PYTHDYLW1	108	1	Yellow	1
PYTHDYLW110P	108	1	Yellow	10
PYTHDYLW1CAS	108	1	Yellow	240

PYTDRMICRO10

PYTC2LCOIL
(see page N214)

Micro D-Ring

- The Micro D-Ring is an attachment point that can be used on small tools and equipment that are otherwise not possible to tether.
- The DR-MICRO is a flexible piece of ballistic plastic that can conform to the shape of many objects. A piece of industrial grade double-sided adhesive tape sticks to the bottom of the Micro D-Ring, allowing it to be attached to a clean surface.

Stock No.	Quantity
PYTDRMICRO10	10

Tape is always used with D-Rings and cinches.
Heat Shrink is added to make a more durable surface

Heat Shrink

- Heat Shrink is used to create an even stronger connection that is more resistant to abrasives and harsh environments
- Links shrink 300% in size, while an inner adhesive securely fastens itself to whatever is being wrapped.

Stock No.	Length (Inches)	Diameter (Inches)	Quantity
PYT07517525P	1.75	0.75	25
PYT1X17525PK	1.75	1	25
PYT15X225PK	2	1.5	25
PYT15X325PK	3	1.5	25
PYT2X410PK	4	2	10
PYT3X410PK	4	3	10

Tools not included

PYDRCORD10

D-Ring Cord

- The D-Ring cord (patent pending) easily cinches to tools weighing under 5 pounds, creating an instant attachment point for many tools

Stock No.	Load Rating (Pounds)	Quantity
PYTDRCORD10	5, 2	10

Tools not included

PYTO1525PIC PYTO125PIC PYT007525PK

Quick Rings

Stock No.	Diameter (Inches)	Load Rating (Pounds)	Quantity
PYTO07525PK	0.75	2, 1	25
PYT0125PK	1	2, 1	25
PYT01525PK	1.5	2, 1	25

⚠ WARNING

- Be sure to use a lanyard that has more weight capacity than the tool you are attaching because drop forces are greater than actual tool weight.
- Any tool that weighs more than 5 pounds should be attached to an anchor point such as a work platform or utility bucket rather than the operator.

UTILITY KNIVES / LED WORKLIGHT

Safety Utility Knives & Blades

- Guarded spring-back blade
- Variable blade depth control for top cuts and tray cuts
- Integrated film and shrink cutter
- Safety point blade standard
- 1 step blade change
- Integrated tape splitter

Applications: cuts corrugated, cartons, taped boxes, tape , strapping, packing film and shrink film.

Stock No.	Description
JHW40080	Ambidextrious Safety Cutter with Holster and Lanyard
JHW40086	100-Pack Replacement Safety Point Blades for 40080
JHW40088	3-Pack Film Cutter Unit for 40080

JHW40080

JHW40086



JHW40088

JHW40082

JHW40084

Disposable Safety Cutter

Retracting safety hooded guard prevents cuts

- NSF certified for food areas
- Safety point blade included standard
- Integrated tape splitter
- Stainless steel blade for hygiene
- 3-button mechanism for top and side cuts
- Applications: multi purpose cutting, food processing areas, cuts corrugate, cartons, taped boxes, film and shrink

Stock No.	Description
JHW40082	Lightweight, ergonomic, ambidextrious disposable safety cutter

Disposable Film Cutter

- Suitable for use in food areas
- Integrated tape slitter
- Stainless steel blade for hygiene

Applications: cuts tape, strapping, shrink wrap and film

Stock No.	Description
JHW40084	Durable plastic construction and a long-lasting super sharp blade

Rechargeable Multifunction Aluminum LED Worklight

- Extra long magnet end
- Super bright
- 33 White Color LEDs

Accessories included

- 1x26650 li-ion rechargeable battery, 3.7V 4000mAh, with circuit board protection from over-charging and over-discharging
- AC100-240V adaptor, 50/60Hz, Output DC4.2V 1A
- DC12V car charger, output DC4.2V 600mA

Stock No.	Description
JHW5101	Recharable Multifuntcion Aluminum LED Worklight

JHW5101

Spare parts

Stock No.	Description	Stock No.	Description
JHW5101-1	Worklight Head Housing	JHW5101-5	Worklight Tail Cap
JHW5101-2	Reflector	JHW5101-6	Lithium-ion rechargeable Battery
JHW5101-3	LED & Assembly	JHW5101-7	AC Charger
JHW5101-4	Worklight Tube	JHW5101-8	DC Charger

PELICAN SAFETY APPROVED LED FLASHLIGHTS

PCD1965

PCD1910

PCD1920

Personal Lights

- PCD1965 - This is molded out of polycarbonate resin, it won't cause sparks and is safe to use in electrical environments.
- PCD1910 and PCD1920 - Long burn times combined with hi-lumen output make for an efficient lighting tool; the perfect personal light.

Stock No.	Model	Batteries	Run Time (Hours)	Lumens	Approvals
PCD1965	Yellow 1465	2 AAA	4	21	Class I, Div. 1 Gp. CD T4A / Class I, Div. 2 Gp. ABCD T4A
PCD1910	1910, black 1910	1 AAA	1	39	NA
PCD1920	1920, black 1920	2 AAA	2.75	67	NA

PCD7060

PCD2360

PCD2410247

Tactical LED Lights

- PCD2360 - If you like the convenience of AA alkaline batteries, but need the performance of lithium batteries, the 2360 LED is the light for you.
- PCD7060 - New dual switch technology that allows the light to be activated by either a body-mounted patrol switch or a tail-mounted tactical switch.
- PCD2410247 - The 2410 is corrosion proof, resistant to extreme temperatures, and submersible.

Stock No.	Model	Batteries	Run Time (Hours)	Lumens	Approvals
PCD2360	2360, black 2360	2 AA	40L - 2H	10L - 110H	NA
PCD7060	7060, black 7060	Lithium Ion	2	160	NA
PCD2410247	StealthLite™, yellow w/ PL shroud 2410	4 AA	7.5	126	Class I II III Div. 1 Grps. ABCDEFG Operating Temp. Class T4

Right Angle Light

- PCD3715 - Featuring downcast LEDs for illuminating your path, the new 3715 LED light also features 174 lumens (high) and 95 lumens (low), and a signaling mode. Another first is a built-in battery life indicator so you will know your light's battery level before you go in.

PCD3715

Stock No.	Model	Batteries	Run Time (Hours)	Lumens	Approvals
PCD3715	3715, yellow w/ PL shroud 3715	4 AA	31L - 4.75H	32L - 174H	Class I, Div. 1 Groups CD Operating Temp. Class T4

PCD2010247

PCD2220245

Medium Duty Lights

- PCD2010247 - Produces a white collimated beam that's as bright as an incandescent flashlight and provides 1 0,000 hours of lamp life and extended battery burn time.
- PCD2220245 - Provides over 30 hours of run time. Light turns on when the head is flipped up. Pivots to a full 180˚ for aiming light.

Stock No.	Model	Batteries	Run Time (Hours)	Lumens	Approvals
PCD2010247	SabreLite™, yellow w/ PL shroud 2010	3 C	32	109	Class I II III Div. 1 Groups ABCDFG Operating Temp. T4 (Energizer E93), 145°C (Duracell MN1400), T3 (Panasonic LR14)
PCD2220245	VB3, yellow 2220	2 CR2032	34	9	UL Listed 4S67/ E184884 Class I, Div. 1 Gps.A,B,C,D, T6.

PCD2610

PCD2690

PCD2720

LED Headlights

- PCD2610 - The 2610 provides hands-free light where you need it, when you need it.
- PCD2690 - It's brighter, more efficient, compact and lighter than other headlamps in its class.
- PCD2720 - Gloved hands, wet hands or oily hands are not an issue when using the 2720 with Gesture Activation Control. Turn on the light with a wave of a hand. Additional features include: Low level red light that preserves night vision. Signaling red (S.O.S.) beacon light.

Stock No.	Model	Batteries	Run Time (Hours)	Lumens	Approvals
PCD2610	HeadsUp Lite™, black 2610	3 AAA	47L - 19H	14L - 30H	Class I, Div. 1; Gp. D T1
PCD2690	HeadsUp Lite™, black 2690	3 AAA	10.5	60	CL I, II,III,DIV1 GRPS ABCDEFG CL 1, Zone 0, Groups IIA, IIB, IIC SGS E1052012
PCD2720	HeadsUp Lite™, black 2720	3 AAA	175L - 8H	5L - 80H	NA

PCD9410

Heavy Duty Light

- 120˚ rotating head, Burn time: 4.75 hrs. (low)/ 1.75 hrs. (high), Battery status indicator, 3 mode switch (High, Low, Flashing)

Stock No.	Model	Batteries	Run Time (Hours)	Lumens
PCD9410	9410, yellow 9410	NiMH pack	4.75L - 1.75H	300L - 741H

⚠ WARNING

- Be sure to use a lanyard that has more weight capacity than the tool you are attaching because drop forces are greater than actual tool weight.
- Any tool that weighs more than 5 pounds should be attached to an anchor point such as a work platform or utility bucket rather than the operator.

PELICAN REMOTE AREA LIGHTING SYSTEMS

PCD9430245

PCD9430245
- Up to 15 hours of burntime
- 3000 lumens of brightness
- Maintenance Free LED Array with life expectancy of 50,000 hours

PCD9430T

PCD9430T
- Up to 15 hours of burntime
- 2000 lumens of brightness
- Maintenance Free LED Array with life expectancy of 50,000 hours

PCD9435

PCD9435
- Battery powered safety approved remote area light.
- 1500 lumens illuminate hazardous locations
- 2 Power settings extend burn time up to 10 hours of clean even light

PCD9460245

PCD9470245

Pelican LED Rechargeable Remote Area Lighting Systems

Stock No.	Description	Battery Type	Run Time (Hours)	Lumens
PCD9430245	RALS LED Single Head, Yellow 9430B	Sealed Gel Acid	8 High Power - 15 Low Power	1000L - 2000H
PCD9430T	Tripod Kit w/ Extension Cord / for 9430T	NA	NA	NA
PCD9435	RALS LED Single Head Safety Approved, Orange 9435	NiMH	5 High Power	
PCD9460245	2-Head RALS System in 1510 Protector™ Case, Yellow 9460	Sealed Gel Acid	7 High Power - Low Power	Variable 500L - 6,000H
PCD9470245	4-Head RALS System in 1510 Protector™ Case, Yellow 9470	Sealed Gel Acid	7 High Power - 14 Low Power	Variable 1,000L - 12,000H
PCD9430230	Optional RALS Universal Voltage Charger 9438	NA	NA	NA
PCD9430012	Optional RALS 12v-24v Vehicle Charger / 9436	NA	NA	NA

Using solid-state mounted LED's coupled with a thermally efficient light engine and the Pelican Protector Case™, the RALS 9470 and RALS 9460 give the user the ultimate maintenance free portable floodlight station to get the job done efficiently, safely and on time. The RALS systems pack light heads and a multi-stage charger in the case for total self contained convenience. The case is also equipped with a telescopic handle and rugged wheels for ease of transport. Includes convenient low battery warning system and waterproof activation switch.

GLOVES

AXOMFFF55010

Mechanix Wear® FASTFIT Gloves

- Atomically cut thumb area of palm provides an exceptional feel
- Taller, easy on-off cuff design with elastic closure

Stock No.	Glove Size
AXOMFFF55008	TAA FastFit Covert Small
AXOMFFF55009	TAA FastFit Covert Medium
AXOMFFF55010	TAA FastFit Covert Large
AXOMFFF55011	TAA FastFit Covert X-Large
AXOMFFF55012	TAA FastFit Covert XX-Large

AXOMGFF55010

Mechanix Wear® ORIGINAL Gloves

- Reinforced fingertips and 2-ply thumb reduce wear and increase protection
- 2-way stretch spandex top increases breathability and flexibility for fit

Stock No.	Glove Size
AXOMGF55008	TAA Original Covert Small
AXOMGFF55009	TAA Original Covert Medium
AXOMGFF55010	TAA Original Covert Large
AXOMGFF55011	TAA Original Covert X-Large
AXOMGFF55012	TAA Original Covert XX-Large

AXOMFPF55010

Mechanix Wear® M-PACT Gloves

- New molded rubber exoskeleton design adds flexible Knuckle protection
- Medium density palm padding to reduce wear and increase protection

Stock No.	Glove Size
AXOMFPF55008	TAA M-PACT Covert Small
AXOMFPF55009	TAA M-PACT Covert Medium
AXOMFPF55010	TAA M-PACT Covert Large
AXOMFPF55011	TAA M-PACT Covert X-Large
AXOMFPF55012	TAA M-PACT Covert XX-Large

FLEET MAINTENANCE

Overview.....N252

Shop & Service Equipment N254

Electronic Measuring Instruments N272

Pressure Washers.....N275

Reels N276

Material Handling.....N278

Hydraulics, Ramps & Stands N283

Bandsaws, Sanders & Grinders N286

Modular High-Density Tool Storage...N289

Industrial Furniture.....N291

FLEET MAINTENANCE

KEEP YOUR FLEET MOVING FORWARD.

When your fleet is down, so is your business. And when your vehicles are not maintained efficiently, they cost you time, money and productivity. At Snap-on, we understand the vital importance of your fleet operations. That's why no one offers more equipment to keep your fleet up and productive than we do. From diagnostics and shop equipment, to battery maintenance, vehicle fluid management and more, Snap-on has the innovative products that ensure your fleet runs at optimal efficiency.

snapon.com/industrial 1.877.740.1900

SNAP-ON HAS EVERYTHING YOU NEED TO KEEP YOUR OPERATION RUNNING SMOOTHLY:

LIFTS
Maximize your repair center's productivity with some of the industry's widest runways, quickest lift speeds and highest lifting capacities. Or, if you're running out of space or need to go to the vehicles, use our mobile column lifts for the flexibility to make the repair.

WHEEL & TIRE MAINTENANCE
We have an award-winning selection of wheel and tire maintenance equipment including aligners, wheel balancers, tire changers and brake lathes that feature cutting-edge technology.

DIAGNOSTICS & INFORMATION
Our diagnostic tools help you get to the heart of the problem quickly. The right software and proper accessories can help you take advantage of all the power your diagnostic tools are designed to deliver.

FACILITIES MAINTENANCE
We have everything your facility needs: shelving, lighting, materials handling, and more. And for metal shops, our workbenches, heavy metal cutting equipment, band saws and other tools and equipment are precision-engineered for critical applications.

MODULAR HIGH-DENSITY STORAGE
Build-A-Bay is an innovative, custom-designed storage solution. We can deliver a complete system that creates a world-class environment by applying Snap-on's experience and unsurpassed attention to detail.

ELECTRIC LIFTS

Challenger Lifts
INNOVATIVE LIFTING SOLUTIONS

Electric/Hydraulic Inground Lifts - 9,000 - 15,000 lb. Capacity

Challenger's electric hydraulic cassette style inground EnviroLift® meets the rigorous demands of professional service facilities. With over 50% more bearing contact surface than competitor's lifts, enhanced wipers both top and bottom and larger 8-1/2" chrome pistons, your shop will have a superior, more stable and repeatable lift resulting in increased productivity. These inground lifts also eliminate environmental concerns with a fully contained polymer housing made from recycled plastic.

EnviroLifts require less shop space than surface mounted lifts. With a smaller footprint, your shop will maximize the number of service bays, resulting in higher parts and service revenue. EnviroLift® also creates a professional showroom style appearance with its open, aesthetically pleasing look.

Other standard features include a mechanical locking ladder that engages every 3" and a stainless steel air lock release cylinder to prevent rust associated with condensation. Available in 10,000, 12,000 and the exclusive 15,000 lb. lift capacity.

Stock No.	EV1020	EV1020MP9	EV1020-QC	EV1020MP9-QC	EV1220	EV1520
Lifting Capacity	10,000 lbs.	9,000 lbs	10,000 lbs.	9,000 lbs	12,000 lbs.	15,000 lbs.
Stroke	68"	68"	68"	68"	68"	68"
Rise Height	74"	70 ¾"	74"	70 ¾"	81 ¼"	84 ¾"
Width Overall	110"	79 ½"	110"	31 ½" / 79 ¾"	99"	71 ½"
Drive-Thru Clearance	87"	N/A	87"	N/A	87"	NA
Reach (Arm Minimum)	19 ⅝"	31 ½" x 26 ½"	19 ⅝"	31 ½" x 26 ½"	32"	26 ¼"
Reach (Arm Maximum)	42 ⅛"	79 ½" x 80"	42 ⅛"	79 ½" x 80"	49 ¼"	43"
Screw Pad Height	3 ⅞" - 6"	2 ¾"	3 ⅞" - 6"	2 ¾"	5" - 7 ¼"	6 ½" - 8 ¾"
Capacity (Per Arm)	2,500 lbs.	2,250 lb. capacity	2,500 lbs.	2,250 lb. capacity	3,000 lbs.	3,750 lbs.
Guide Plunger Diameter	8 ½"	8 ½"	8 ½"	8 ½"	8 ½"	8 ½"
Motor/Voltage	2HP, 208v-230v, 60Hz, 1Ph	2HP, 208v-230v, 60Hz, 1Ph	3HP, 208v-230v, 60Hz, 1Ph	3HP, 208v-230v, 60Hz, 1Ph	2HP, 208v-230v, 60Hz, 1Ph	2HP, 208v-230v, 60Hz, 1Ph
Speed of Rise	40 Seconds	40 Seconds	27 Seconds	27 Seconds	48 Seconds	60 Seconds
Air Required	75 - 125 psi	75 - 125 psi	75 - 125 psi	75 - 125 psi	75 - 125 psi	75 - 125 psi

Features & Benefits

- Larger 8 ½" diameter chrome pistons provides greater stability under load
- Chrome non-breathing ram style cylinder (EV1020 only) minimizes water intake and other contamination
- Enhanced raised wiper at top and bottom of bearing provides better grease retention and minimizes contaminates from entering into bearings
- Over 50% longer bearing contact than competitor lifts provides increased stability
- Stainless Steel air lock release cylinder promotes longer working life with its corrosion resistant design
- Mechanical lock engages every 3" provides safety and allows technician to work at their ergonomic height to increase productivity and minimize fatigue
- Fully contained and sealed recycled polymer cassette tub eliminates risk of hydraulic fluid seeping into the ground
- Double telescoping screw adjusts from 3-⅛" to 6" with removable rubber pad for frame contact (EV1020 only)
- Wide drive-thru at 87" accommodates wider vehicles, minimizes tire pinching and provides easy drive-on (EV1020 and EV1220 only)

Air/Water Inground Lifts - 9,000 - 12,000 lb. Capacity

Although traditional inground electric and oil auto lifts have become more environmentally friendly, these lifts still operate with electrical motors and hydraulic oil, ATF fluid, or bio-fluid.

Since AquaVantage runs on air and tap water, two of our most abundant and natural resources, there are no issues with federal, state, or local regulations should the fluids need to be discarded. You can rest assured you are making the right environmental decision.

And since it features such an innovative realGREEN™ design, functioning similar to the traditional low pressure high oil volume lifts of yesterday, without any oils or high pressure cylinders, AquaVantage showcases the best balance of safety, reliability, productivity and eco-friendly benefits.

EnviroLift® with AquaVantage™

realGREEN™ earth friendly product

Stock No.	AV1020MP9	AV1020WV	AV1220
Lifting Capacity	9,000 lbs.	10,000 lbs.	12,000 lbs.
Stroke	73”	73”	73”
Rise Height	75 3/4”	79 1/8”	80 1/2”
Width Overall	31 1/2” / 79 3/4”	97”	98 7/8”
Drive-Thru Clearance	N/A	87”	87”
Reach (Arm Minimum)	31 1/2” x 26 1/2”	19 5/8”	32 3/16”
Reach (Arm Maximum)	79 1/2” x 80”	42”	49 3/8”
Rubber Pad Adapter Min	2 3/4”	3 7/8”	5”
Rubber Pad Adapter Max	5 3/4”	6”	13 1/4” with highest extensions
Capacity (Per Arm/Pad)	2,250 lb. capacity	2500 lb. capacity	3,000 lb. capacity
Speed of Rise	Approx. 45 Seconds	Approx. 45 Seconds	45 Seconds
Operating Pressure (Air)	200 psi	200 psi	120 psi

Features & Benefits

- Patented AquaVantage™ Technology runs on air and tap water providing an energy efficient lifting solution that is the leading environmentally firnedly automotive lift on the market
- No electric motor, no hydraulic oil and recycled polymer cassette tub equals the only realGREEN™ sustainable earth friendly lift product
- Large 8-¼" double walled, anodized aluminum pistions provide stability, corrosion-resistance and stunning showroom-like appearance
- Air actuated water control valve allows for positive ascent and descent
- 80" rise provides maximum head room for working underneath vehicles
- 3-stage front and rear arms provide maximum arm retraction and reach to accommodate wide body sport cars and longer wheelbase vehicles
- 87" drive-thru accommodates wider vehicles, minimizes tire pinching and provides easy drive-on
- Double telescoping screw pads reach the widest range of vehicles, minimizes tire pinching and provides easy drive-on
- Simple, surface accessible lifting component maintenance design provies access to all lifting components without excavation, allowing routine maintenance at surface level
- Drive-over recessed hex bolts minimize tire damage
- AV1220 includes facotry installed amplifier

⚠ WARNING

- Read and follow all safety messages in instructions
- Read safety precautions on pages W1 to W4

PROCUT

PRO-CUT ROTOR MATCHING SYSTEMS

PFM 9.2 DRO 6 Adapter Package

The PFM 9.2 DRO is our bestselling on-car lathe and is approved or required by more OEMs than any other lathe on the market! The lathe most likely to be found in dealerships, retailers, and independent shops now comes with these great features:

- The latest PFM Computer and DRO electronics package displays "as cut" lateral run-out, has an hour meter, and keeps track of # of rotors cut. Can be upgrades to G2x Measuring cutting head, and/or full GYR technology package.
- 4-wheel fully adjustable height trolley works on any lift or no lift at all (if jack stands are all you have), and provides stability and additional storage for tool kit, lug nut kit, and other accessories.
- Includes Speed Lock Cutting Head now with 2 position tool arms for larger rotors.
- Full 1 Year Warranty parts and labor!
- Includes Set-up and Training
- Includes access to TrainSmart, our on-line tech training program that includes Pro-Cut Rotor Matching System certification.

PCI926ADP – PFM 9.2 DRO 6 Adapter

Package includes:

- **PCI92BASEIBT** DRO Base lathe, trolley and cutting head
- **PCI506ADP** 6 Adapter package for 4 lug cars up to domestic ¾ ton trucks
- **PCI50ACC** Accessory kit

A10 Warthog Commercial Duty Lathe Package

Designed with busy fleets and truck shops in mind, the A10 Warthog is the latest in a long line of precision on-vehicles lathes from Pro-Cut. The Warthog is designed to work on disc brake vehicles from small cars up to medium duty trucks. With these great features:

- Rugged belt drive system that offers nearly 2X the start-up torque of our other lathes - great for all-wheel drive and truck applications.
- Larger (by 8 lbs.) aluminum body casting than our other lathes offers improved vibration dampening and smooth cuts.
- 4-wheel fully-adjustable height trolley works on any lift or no lift at all (if jack stands are all you have), and provides stability and additional storage for tool kit, lug nut kit and other accessories
- The latest PFM Computer and DRO electronics package displays "as cut" lateral run-out, has an hour meter, and keeps track of # of rotors cut. Can be upgrades to G2x Measuring cutting head, and/or full GYR technology package.
- Includes Speed Lock Cutting Head now with 2 position tool arms for larger rotors.
- Full 2 Year Warranty parts and labor!
- Includes Set-up and Training

PCIA107ADPHD A10 Warthog Commercial Duty Lathe

Package includes:

- **PCIA10BASIBT** A10 Warthog lathe base, trolley and cutting head
- **PCI505ADP** 5 Adapter package for 4 lug cars up to ½ ton truck
- **PCIACC** Accessory kit
- **PCI50TRKKIT** ¾ ton to 1 ton single and dual wheel kit

Optional - Sold Separately

- **PCI50999KIT** Kit for trucks F650 and larger

⚠ WARNING

- Read and follow all safety messages in instructions
- Read safety precautions on pages W1 to W4

SHOP & SERVICE EQUIPMENT

Deployable Mobile Column Lifts

Standard Package 6 Lifts & Accessories - MCLSFSS6

6 Column, 230 Volt, 3-phase

QTY	Stock No.	Description
1	MCLN166W	Mobile comlumn lift system, 6 column, 16" fork length, 96k lbs, wide body 35.43" carriage
6	MCLAB1616	Mobile Support Stands, 16,000 lbs - Tall (Adj. range 51." to 79.0")
6	MCLSMA2M (pair)	Small Wheel Adapters - 6" - for tire diameters (1 pair/column), for fork length 16"
1	MCLLVA9MW	Light Vehicle Adapter, 18,000 lbs capacity per pair, For Wide Body Carriage WB
1	MCLLVAC9	Cart for all light vehicle adapters
1	MCLLVAEXMF	Extension Kit - 2",4",6",8" Extensions & Metal Fork Adapters
1	MCB	Main Control Box - to allow separating 2 of the columns from the set of 6
1	DP-20	Dummy Plug - to allow separating 2 of the columns from the set of 6
1	MCLCB32W16	Cross-Beam - 32 k lbs Capacity

Standard Package 4 Lifts & Accessories - MCLSFSS4

4 Column, 230 Volt, 3-phase

QTY	Stock No.	Description
1	MCL16-4 W	Mobile Column Lift System, 4 Columns, 16" Fork Length, Wide Body, 64k lbs
4	MCLAB1616	Mobile Support Stands, 16,000 lbs - Tall (Adj. range 51." to 79.0")
4	MCLSMA2M (pair)	Small wheel adapter - 6" - for tire diameters (1 pair/column), for fork length 16"
1	MCLLVA9MW	Light Vehicle Adapter, 18,000 lbs capacity per pair, For Wide Body Carriage WB
1	MCLLVAC9	Cart for all light vehicle adapters
1	MCLLVAEXMF	Extension Kit - 2",4",6",8" Extensions & Metal Fork Adapters
1	MCB	Main Control Box - to allow separating 2 of the columns from the set of 4
1	DP-20	Dummy Plug - to allow separating 2 of the columns from the set of 6
1	MCLCB32W16	Cross-Beam - 32 k lbs Capacity

Wireless Package 6 Lifts & Accessories - MCLWFSS6

6 Column Battery Operated Wireless

QTY	Item Number	Description
1	MCLNWRL166W	Wireless Mobile Column Lift System, 6 Columns, 16" Fork Length, Wide Body
6	MCLAB1616	Mobile Support Stands, 16,000 lbs - Tall (Adj. range 51." to 79.0")
6	MCLSMA2M (pair)	Small Wheel Adapters - 6" - for tire diameters (1 pair / Column), for fork length 16"
1	MCLLVA9MW	Light Vehicle Adapter, 18,000 lbs capacity per pair, For Wide Body Carriage WB
1	MCLLVAC9	Car for all light vehicle adapters
1	MCLLVAEXMF	Extension Kit - 2",4",6",8" Extensions & Metal Fork Adapters
1	MCLCB32W16	Cross-Beam - 32 k lbs Capacity

Wireless Package 4 Lifts & Accessories - MCLWFSS4

4 Column Battery Operated Wireless

QTY	Item Number	Description
1	MCLNWRL164W	Wireless Mobile Column Lift System, 4 Columns, 16" Fork Length, Wide Body
4	MCLAB1616	Mobile Support Stands, 16,000 lbs - Tall (Adj. range 51." to 79.0")
4	MXLSMA2M (Pair)	Small Wheel Adapters - 6" - for tire diameters (1 pair / Column), for fork length 16"
1	MCLLVA9MW	Light Vehicle Adapter, 18,000 lbs capacity per pair, For Wide Body Carriage WB
1	MCLLVAC9	Cart for all light vehicle adapters
1	MCLLVAEXMF	Extension Kit - 2",4",6",8" Extensions & Metal Fork Adapters
1	MCLCB32W16	Cross-Beam - 32 k lbs Capacity

Built-in Charging System

Deployable Mobile Column Lifts

Package contents: Mobile Column Lift System - Lift Capacity - 96,000 lbs. - 6 Columns, 6 Mobile Support Stands, 6 Small Wheel Adapters, 2 Light Vehicle Adapters and 2 Tri-con Container

QTY	Stock No.	Description
1	**DEPMCLS**	MCL 16-6 Deployable Lift Package (includes items listed below)
1	**MCL16-6W**	Mobile Column Lift System, 6 Columns, 12.5" Fork Length, Wide Body, 96k lbs cap.
6	**AB-16-16**	Mobile Support Stands, 16,000 lbs. - Tall (Adj. range 51." to 79.0")
6	**SMA-2 (pair)**	Small Wheel Adapters - 6" - for reduction to 13"rims (1 pair/Column)
2	**LVA-9 (pair)**	Light Vehicle Adapter, 18,000 lbs capacity per pair

Each column is mobile and can be easily positioned on the vehicle wheels for the lifting operation. It can be used both in automotive and heavy-duty repair shops. The diverse accessories allow the operator to use the MCL's for various lifting needs.The columns can be operated in single, paired, set of four or set of six modes.

- Capacity: 16,000 lbs. per column
- Standard delivery of 4 and 6 columns
- Electronic self diagnostics
- Standard leveling control
- Lifting carriage with fixed wheel lifting forks
- Ball Screw Mechanism
- Automatic synchronization
- High safety level insured by independent locking device
- Space-saving column design
- Low net weight for easy handling
- Virtually maintenance free
- Made in the USA

Deployable Mobile Column Lifts

Package contents: Mobile Column Lift System - Lift Capacity - 72,000 lbs. - 6 Columns, 6 Mobile Support Stands, 6 Small Wheel Adapters, 2 Light Vehicle Adapters and 2 Tri-con Container

QTY	Stock No.	Description
1	**DEPMCLS**	MCL 16-6 Deployable Lift Package (includes items listed below)
1	**MCL12-6W**	Mobile Column Lift System, 6 Columns, 12.5" Fork Length, Wide Body, 96k lbs cap.
6	**AB-12-12**	Mobile Support Stands, 12,000 lbs. - Tall (Adj. range 51." to 79.0")
6	**SMA-2 (pair)**	Small Wheel Adapters - 6" - for reduction to 13"rims (1 pair/Column)

Each column is mobile and can be easily positioned on the vehicle wheels for the lifting operation. It can be used both in automotive and heavy-duty repair shops. The diverse accessories allow the operator to use the MCL's for various lifting needs.The columns can be operated in single, paired, set of four or set of six modes.

- Capacity: 12,000 lbs. per column
- Standard delivery of 4 and 6 columns
- Electronic self diagnostics
- Standard leveling control
- Lifting carriage with fixed wheel lifting forks
- Ball Screw Mechanism
- Automatic synchronization
- High safety level insured by independent locking device
- Space-saving column design
- Low net weight for easy handling
- Virtually maintenance free
- Made in the USA

⚠ WARNING

- Read and follow all safety messages in instructions
- Read safety precautions on pages W1 to W4

SHOP & SERVICE EQUIPMENT

Alignment Lifts

14K SCISSOR ALIGNMENT LIFT
14,000 lb. Lifting Capacity
4814605AF
*All models are available in Flush Mount versions

John Bean Scissor Alignment Lifts

Maximize your bay's productivity with 10K and 14K Scissor Lifts - featuring the industry's widest runways, highest lift height and longest wheelbase capabilities. These lifts feature clear access between runways for superb alignment accuracy.

Turntable cutouts and integrated rear slip plates make these lifts alignment ready. (Turntables must be purchased separately)

ALSO AVAILABLE: LOCKED & LIGHTED SCISSOR ALIGNMENT LIFTS

- Turntables and Roller Jacks standard
- Industry's first certified lifts with an integrated light system

10,000 LIFTING CAPACITY:
4810605LL - 255" OAL
4810605XLL - 265" OAL

14,000 LIFTING CAPACITY:
4814605LL - 270" OAL



14K 4-POST OPEN-FRONT ALIGNMENT LIFT
14,000 lb. Lifting Capacity
172" Two-Wheel Alignment Wheelbase
EELR507A
Also Available: Locked & Lighted 14K 4-Post - includes turntable and roller jacks as standard
EELR509A

John Bean 4-Post Alignment Lifts

4-Post alignment lifts come in open-front and closed-front styles. 14K, and 18K lifting capacities are available. John Bean lifts offer rugged durability and multiple safety systems. (Roller Jacks are included standard. Turntables must be purchased separately.)

Also Available:

Stock No.	Description	Style	Lifting Capacity (lbs)
EELR507A	205" Wheelbase, Four-Wheel Alignment 70" - 158"	Open-Front	14,000
	Two Wheel Alignment 188"		
EELR509A	205" Wheelbase, Four-Wheel Alignment 70" - 158"	Open-Front	14,000
	Two Wheel Alignment 188" with Lights and Locks		

EECR617A
Shark Electronic
Measuring System

Shark Electronic Measuring System

With easy-to-use ultrasound technology, the Shark provides live measurements on up to 12 points on the vehicle. User-friendly software guides the technician through the pulling process, and prints pre/post-repair documentation. VIN decoding and a real vehicle image based vehicle database allows for a faster job throughput process. The Shark comes with a space-saving cabinet and 22" HD wide screen monitor.

BH9014223
Power-Pro 3000 SL
Collision Frame Rack

Blackhawk Power Pro SL/SLT Series

The Power-Pro SL and SLT series are available in 20' and 22' lengths and enables 360°, 10 Ton pulling, along with a 9,000 Lbs. lifting capacity.

The Power-Pro SL series of racks have an extended height lifting capability (12" to 42") for ergonomic working heights, an open front and rear for greater accessibility to the vehicle for repairs, a faster pinchweld anchoring system with fewer bolts to secure it to the rack platform and 60% more chain ty-downs for efficient and timely vehicle tie backs.

The SLT series provides the same features as above but with a 22" working height which tilts to the rear for easy vehicle loading.

BH9011011
Power-Pro 18 BT
Collision Frame Rack

Blackhawk Power-Pro BT/CT Series

The Power Pro BT (Bearing Tower) and CT (Castered Tower) Series are available in 18', 20' and 22' lengths and enables 360°, 10 Ton pulling, along with a 10,000 Lbs. lifting capacity. Front and rear removable cross-members provide for closer access to the vehicle when making mechanical or structural repairs.

⚠ WARNING

- Read and follow all safety messages in instructions
- Read safety precautions on pages W1 to W4

SHOP & SERVICE EQUIPMENT

JohnBean

Imaging Wheel Aligners

EEWA550B
V3400 Wireless
Imaging Wheel Aligner

EEWA550B V33400 Wireless Imaging Wheel Aligner

The John Bean V3400 Wireless Imaging Wheel Alignment System provides flexible installation, usage and mobility options. Patented digital camera tracking automatically adjusts to the height of the vehicle.

EEWA544G
V2200
Imaging
Wheel
Aligner

EEWA544G V2200 Imaging Wheel Aligner

The V2200 wheel alignment system provides core features for the alignment professional. Patented imaging technology provides accurate and real-time measurements that improves productivity. User friendly features such as EZ-TOE and an extensive vehicle specification database delivers customer satisfaction, ease of use and accuracy.

Recommended Accessories:

Stock No.	Description
EAK0284B11A	ETHOR Plus Scan Tool
EAK0289J86B	VIN Scanner
EAK0289J91A	Drive-On Camera Aid
EAK0222J83B	Hub Adapter Kit (Wheel-Off Alignment)
EAK0256J71A	Ride Height Target Kit

Imaging Wheel Aligners

EEWA557B
Prism Portable Imaging Wheel Aligner

EEWA557B Prism Portable Imaging Wheel Aligner

The award-winning Prism leverages a wireless communication system with BluetoothTM technology, cordless pods powered by Lithium Ion batteries, and components made from lightweight magnesium.

EEWA559B
Prism Toolbox Portable Imaging Wheel Aligner

RECOMMENDED ACCESSORIES:
US Made TurnTables (Pair) - **00001260000**
Drop-Down Kit - **EAK0289J85A**

EEWA557B Prism Portable Imaging Wheel Aligner

The award-winning Prism leverages a wireless communication system with BluetoothTM technology, cordless pods powered by Lithium Ion batteries, and components made from lightweight magnesium.

Heavy-Duty Wheel Aligners

EEWA520B AXIS4000 Standard Model

The rugged portable AXIS4000 wheel alignment system for commercial vehicles utilizes imaging alignment technology to offer live readings and fast, accurate results. The patented ProClamp* quickly and easily attaches to alloy and steell rims without requiring runout compensation.

EEWA520D AXIS4000 Deluxe Kit

Includes Standard Model, Mobility Cart and Trailer Alignment Accessories

SHOP & SERVICE EQUIPMENT

Wheel Balancers

JohnBean

BFH 1000 Total Ride Performance System

Designed to meet the demands of high-volume shops and those needing wheel optimization, the BFH 1000 is the right choice. This “touchless" system obtains all readings and indicates weight placement automatically in a single spin. Weight management software saves you money by tracking your usage so that you buy only what you use.

EEWB519SW
BFH 1000
Wheel Balancer

B600L Wheel Balancing System

The B600L wheel balancing system is the ideal solution for high-volume workshops featuring short balancing cycle, fast data entry and easyWeight.

EEWB562AL
B600L
Wheel Balancer

EEWB566AS
B300S
Wheel Balancer

B300S Wheel Balancing System

The B300S wheel balancing system combines cutting-edge technology with a small footprint – perfect for shops where space-saving equipment is a necessity.

Heavy-Duty Wheel Balancer

9800 Heavy-Duty Wheel Balancer

The John Bean 9800 wheel balancer meets the heavy-duty wheel balancing needs of todays shops. The John Bean 9800 wheel balancer is designed to balance truck, bus, RV and automobile wheel and tire assemblies.

EEWB543AW
9800 Heavy-Duty Wheel Balancer

Brake Lathes

JBC401BL Brake Lathe

The John Bean 401 professional combination bench brake lathe is designed to handle all brake resurfacing needs. The 401 comes equipped with our standard tooling package to resurface most passenger cars and light trucks; optional tooling is available to handle specialty and heavy-duty applications. Shown with optional Work Bench and Tool Board.

JBC401BL

JBC201BL

JBC201BL Brake Lathe

The John Bean 201 single-speed combination bench brake lathe is designed to handle all your brake resurfacing needs. the 201 comes equipped with our standard tooling package to resurface most passenger cars and light trucks; optional tooling is available to handle specialty and heavy-duty applications. Shown with optional Work Bench and Tool Board.

⚠ WARNING

- Read and follow all safety messages in instructions
- Read safety precautions on pages W1 to W4

SHOP & SERVICE EQUIPMENT

Tire Changers

John Bean Tire Changers are the answer to the latest needs of the modern tire service center. They are ideal for handling passenger car, light truck, heavy-duty and high-performance wheels found today and those of the future. Their combination of speed, versatility and safety translate into better wheel service and increased productivity for your business or organization.

EEWH536B ATC 1000 - Fully Automatic Tire Changer

EEWH542AJBC ATC 900 - Dual Bead Breaker Leverless Tire Changer

EEWH517A EHP - System V Tilt-Tower Tire Changer

EEWH512AU EHP - System II Swing-Arm Tire Changer

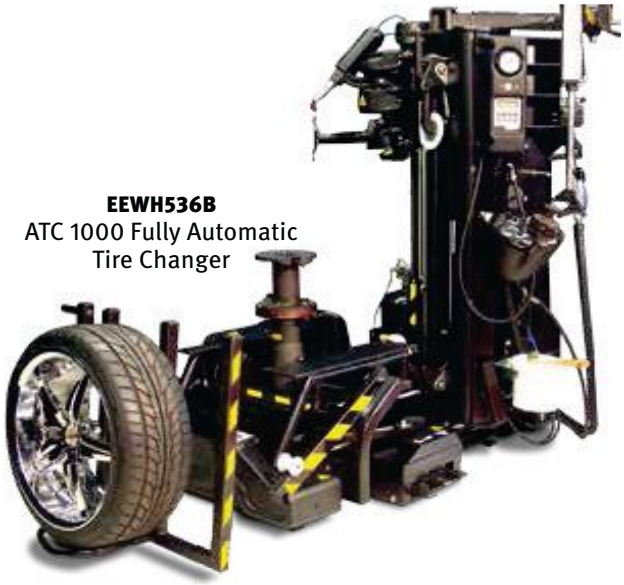

EEWH536B
ATC 1000 Fully Automatic Tire Changer

EEWH542AJBC
ATC 900 Dual Bead Breaker Leverless Tire Changer

EEWH517A
EHP System V Tilt-Tower Tire Hanger

EEWH512AU
EHP System II Swing-Arm Tire Changer

Heavy-Duty Tire Changer

The John Bean T8026 is a heavy-duty tire changer designed for tubeless and tube-type wheels. This tire changer can mount/demount a wide variety of truck, bus, tractor and off-road tires.

EEWHT8026 - Heavy-Duty Tire Changer

EEWHT8026
Heavy-Duty Tire Changer

ULTMILKITA

Includes HMMWV Software and Adapter

ULTMILKITA

Standard Kit Includes:

PRO-LINK® Ultra Scan Tool
Heavy Duty Standard Suite*
Data Cable
110v Power Adapter
9-pin Deutsch Adapter
6-pin Deutsch Adapter
16-pin OBDII Adapter
6-cell Battery Pack
2 Year Warranty

***Cummins** support for these applications limited to basic codes and data.

Included Software:

DDEC Suite: DDEC 6, 10, 13 (2007 - 2014)	**EEHD864018**
DDEC Suite: DDEC II, III, IV, V v2	**EEHD864015**
Detroit Diesel® MBE	**EEHD864031**
CAT® ACERT™ 2.0 (2003–2009)	**EEHD864024**
CAT® Electronic Engines (1990–2003)	**EEHD864027**
NAVISTAR® MaxxForce® (2007–2013)	**EEHD864009**
International® Engines 2.0 (1994–2006)	**EEHD864010**
NAVISTAR® Body and Chassis	**EEHD864041**
Allison Transmission Suite: GEN IV, 1K/2K, 3K/4K, WTEC, CEC1	**EEHD864005**
Meritor WABCO® Suite: Air, Hydraulic, and OnGuard™ CMS	**EEHD865014**
Bendix® Air ABS	**EEHD864013**
Trailer ABS Suite: Wabash, Haldex, Eaton	**EEHD864021**
Heavy Duty Standard Suite: HDS J1708, HDS J1939, and OBD II/EOBD (2002–Current)	**EEHD184040SW**
Light and Medium Trucks (LMT) Enhanced Ford, GM, and Isuzu (1996–2012) Includes OBD II/ J1962 Adapter (EEHD488013)	**EEHD864048**
HMMWV Transmission SW	**ULTHMMWVSW**

Included Accessories:

HDMI Adapter	**EEHD494094**
Carrying Case and Foam Insert	**EEHD215014**
Screen Protector	**EEHD2450801**

6-pin Deutsch Adapter
EEHD494024

9-pin Deutsch Adapter
EEHD493028

12-pin Connector
EEHD481003

OBD II/J1962 Adapter
EEHD493013

EEHD481009

NATO Adapter
EEHD509011

110v AC Adapter
EEHD494099

Snap-on Fault Code Guide
EEHD909008

⚠ WARNING

- Read and follow all safety messages in instructions
- Read safety precautions on pages W1 to W4

SHOPKEY PRO

SHOPKEY® PRO is faster, easier and more intuitive than ever before. So your shop can be more productive than ever before.

It's FASTER

ShopKey Pro eliminates the need for multiple searches. By returning all relevant content in just one look-up, ShopKey Pro quickly delivers the answers you need to complete the job.

TSBs – Now you get relevant TSBs without all the extra steps. ShopKey Pro automatically shows TSBs and recalls along with the rest of the repair information, so you don't have to perform a separate search.

Relevant TSBs and recall notices are automatically displayed onscreen

ShopKey Pro introduces a completely new way of capturing exactly the information you need. The information look-up is based on vehicle components, so it matches the repair process.

Simply look up a component and ShopKey Pro returns only the relevant repair information, including TSBs, component locators, diagnostic procedures, maintenance schedules, live expert information and the best color wiring diagrams in the business.

Lifetime maintenance service schedule with locations, procedures and specs

IT'S MORE INTUITIVE

Auto-Suggest – Frequent look-up terms are displayed after only three keystrokes. ShopKey Pro automatically spell checks and locates the right answer, including the top ten look-ups for the selected vehicle.

Built-in Thesaurus – Water pump, coolant pump, recirculating pump No need to know what each manufacturer calls a specific component. Just type a standard term and ShopKey Pro will intelligently cross-reference component names.

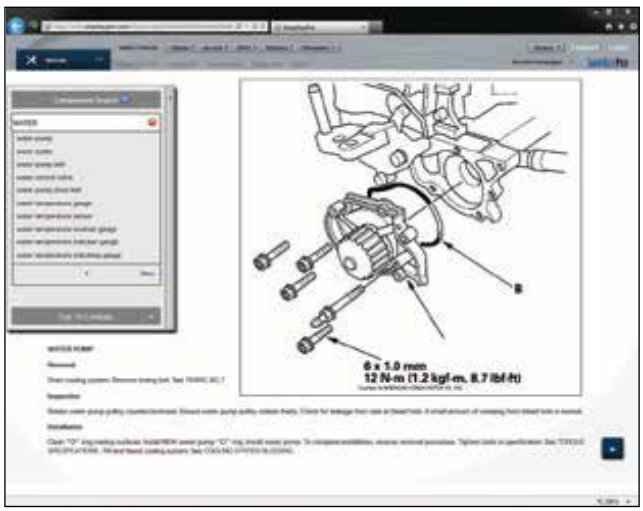

Component look-up with auto-suggest shows top ten look-up terms

Imagine being just 30 seconds away from a solution to any repair problem that pulls into your bay. Introducing shopkey pro, the most trusted name in repair information. Designed to be the fast and easy path to the answers you need for over 50 makes, shopkey pro puts everything in one place – from repair, diagnostics and maintenance schedules to wiring diagrams and expert information.

INCLUDED RESOURCES

REPAIR – This comprehensive component-based resource works the way you do. Select a vehicle component and see component location, specifications, operating values, removal & installation procedures and wiring diagrams.

DIAGNOSTICS – Enter a fault code to find the information needed to diagnose and fix the problem, including code description, code set conditions, component location, diagrams, test procedures and specifications.

MAINTENANCE – The maintenance schedules are straight forward so anyone in the shop can sell services and grow a profitable maintenance business. You get lifetime service schedules, maintenance procedures and related specifications. The unique component locator tab shows exactly where to begin the maintenance procedure.

WIRING DIAGRAMS – The full-color diagrams are easy to follow. Zoom in on a diagram and it remains clear. Select a wire and the circuit trace feature highlights the complete circuit from end-to-end.

COMMUNITY – An exclusive online community puts you in touch with the latest FastTrack® repair solutions. Exchange the latest tips and expertise with ShopKey Pro technicians across the country.

TSBS – Vehicle-specific TSBs and recalls from the OEMs are presented with the component look-up. No need to search for TSBs separately.

VINTAGE – With coverage for vehicles all the way back to 1960, you'll be ready for anything. ShopKey Pro Vintage comprises a rich library of engine performance, wiring, chassis, and other information.

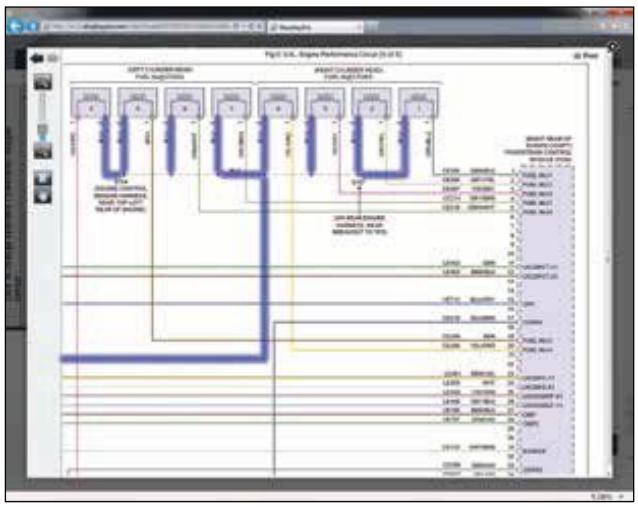

ShopKey Pro's full color, SVG writing diagrams

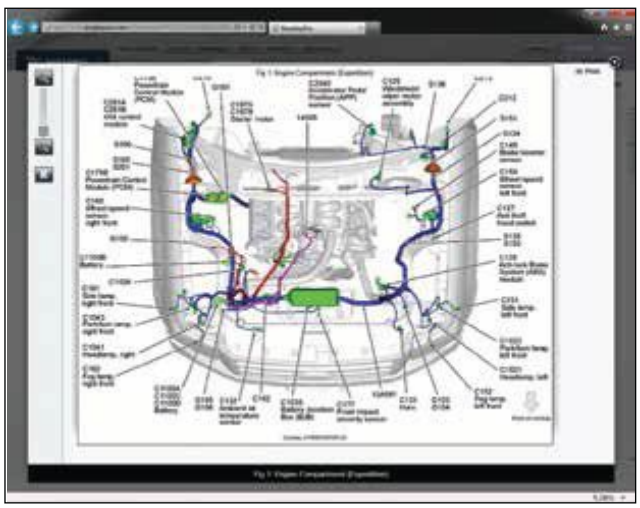

Complete OEM Service Information including component location diagrams

With online access, you never need to worry about staying current. Just login to ShopKeyPro.com using the browser of your choice - Firefox, Chrome or Internet Explorer, and you'll automatically receive access to fresh content delivered daily.Increase customer loyalty, boost profits and make your shop the best in the business.

Contact your Snap-on representative to see the complete power of ShopKey Pro.

WARNING

• Read and follow all safety messages in instructions
• Read safety precautions on pages W1 to W4

IPA SPECIALTY EQUIPMENT

Diagnostic Trailer Testers

STMIL0650

STMIL0649

9007A

9102

Quickly troubleshoot lighting, air brakes and ABS systems with the industry's leading trailer testers. The intuitive and durable designs are ideal for both on and off-site trailer repairs.

Description	Stock No.	Connection Type	Weight	Dimensions L x W x H
NATO MUTT®	**STMIL0650**	MS 75021-2 NATO/ 7 Round pin (SAE J560)	52 lbs.	14" x 10" x 28"
NATO MUTT® and Accessory Kit	**STMIL0625**	MS 75021-2 NATO/ 7 Round pin (SAE J560)	62 lbs.	14" x 10" x 28"
Super MUTT® Deluxe Edition	**9008-DL**	7-Way Round Pin	52 lbs.	14" x 10" x 28"
Super MUTT® Head	**9005A**	7-Way Round Pin	26 lbs.	16.5" x 10.5" x 11.5"
Smart MUTT® (7 Round Pin)	**9007A**	7-Way Round Pin	15 lbs.	16.5" x 9.5" x 9"
Smart MUTT® (7 Spade Pin)	**9004A**	7 Way Flat Pin	15 lbs.	13.5" x 9.5" x 9"
Mini MUTT®	**9003A**	7 Way Flat Pin	15 lbs.	13.5" x 9.5" x 9"
Heavy Duty Ranger MUTT®	**9102**	7-Way Round Pin	2 lbs. (Empty)	12.25" x 5.25" x 7.25"
Light Duty Ranger MUTT® Trailer Tester	**9101**	7-Flat, 6-Round and 4/5-Flat Pin	2 lbs. (Empty)	12.25" x 5.25" x 7.25"

Description	Stock No.	Includes
Trailer Tester Accessory Kit	**STMIL0649**	12 ft. NATO Cable, 7 Flat/7 Round Adapter, Master Trailer Cleaner Kit, 7 Round Circuit Tester, 7 Flat Circuit Tester, 6 Round Circuit Tester, 4/5 Pin Tester, 3 Way Trailer Adapter

Fuel/Fluid Transfer and Filtration

9049M Fleet Tank Sweeper (120v AC)

Lightweight and Portable Filtration System for Tank Applications Including Trucks, Tractors and 55 Gallon Drums

Pump Type	Pump Req.	Flow Rate	Intake	Output	Filter	Weight	Dimensions
Rotary Vane	120V AC (6.5 Amp)	20 GPM	3/4" Diameter	1/2" Diameter	10 Micron Water Blocking	32 lbs.	L: 12" x W: 13" x H: 20"

9040PN Fuel Tank Sweeper (Pneumatic)

A Complete Turnkey Solution for Transferring, Polishing, Blending and Filtering Fuel

Pump Type	Pump Req.	Flow Rate	Intake	Output	Filter	Weight	Dimensions
Pneumatic Diaphragm	4 CFM at 50 PSI	28 GPM (UOFR*)	1" Diameter	1" Diameter	10 Micron Water Blocking and 30 Micron Particulate	70 lbs.	L: 23" x W: 14" x H: 42"

DTP20C

DTP20C Industrial Fuel Cleaner and Transfer System (12V DC)

Battery Powered, Mobile Filtration System for Use in Fuel Islands, Vehicle Recovery and Fleet Operations

Pump Type	Pump Req.	Flow Rate	Intake	Output	Filter	Weight	Dimensions
Rotary Vane	120V AC 30A	20 GPM	1" Diameter	3/4" Diameter	10 Micron Water Blocking	85 lbs.	L: 23" x W: 14" x H: 42"

9070

9070 Def Transfer System (120V AC)

Professional Grade Turnkey Kit for Automotive and Fleet Shops

Pump Type	Pump Req.	Flow Rate	Intake	Output	Nozzle Type	Weight
Rotary Diaphragm	120V AC (6.5 Amp)	9 GPM	6' Long 3/4" Diameter	8' Long, 3/4" Diameter	Manual (non-automatic shutoff)	15 lbs.
Rotary Vane	120V AC (6.5 Amp)	9 GPM	6' Long 3/4" Diameter	6' Long 3/4" Diameter	Manual (non-automatic shutoff)	15 lbs.

EEBC500NATO

EEBC500NATO Standard NATO Battery Charger

- Charges 6, 12, and 24 volt batteries
- Foam filled wheels for enhanced portability
- Upgraded control board coating for durability
- Based on Snap-on EEBC500 Battery Charger Plus (see p. 431)
- Versatilite connectivity
- Fitted with twin extruded output cable and Anderson connector
- Includes both standard clamp set and NATO adaptor

EEBC500DEP

EEBC500DEP Deployable NATO Battery Charger

- Fitted in rugged Storm® case for extreme portability
- Includes housing mounts, transformer, control panel, and cable storage
- Auto shut-off when case closes
- Charges 12 and 24 volt batteries
- Flash reprogramming at 24 volts
- Shown with EECS500 battery tester (not included)

See pages 461-466 for the complete selection of Snap-on Battery Chargers & Testers

KBI

KrankingKART™

The heart of the KrankingKART™ is the nickle carbon KAPower® supercapacitor. The KAPower® supercapacitor is initially energized from the vehicles electrical system. KAPower® than stores energy until needed. It has a long service life of 500,000 + cycles and will outlast the vehicle it is jump-starting. The KAPower® is virtually unaffected by cold temperatures and is maintenance free.

KBI800030

KBI800031

	Portable	Automotive	HD Commercial	HD Industrial	Military	HD Industrial	Military	Military
Stock No.	**KBI800034**	**KBI800033**	**KBI8000030**	**KBI8000031**	**KBI800032**	**KBI800035**	**KBI800036**	**KBI800038**
Capacitor	12 Volt	12 Volt	12 Volt	24 Volt	24 Volt	12/24 Volt (Dual Voltage)	12/24 Volt (Dual Voltage)	24 Volt
Engines Up To	7 Liter	10 Liter	15 Liter	18 Liter	18 Liter	18 Liter	18 Liter	18 Liter
Auxiliary Connector	HD Booster Clamp	HD Booster Clamp	HD Booster Clamp	HD Booster Clamp	NATO	HD Booster Clamp	NATO/HD Booster Clamp	NATO/HD Booster Clamp
Cable Length	6 Feet	7.5 Feet	7.5 Feet	7.5 Feet	12 Feet	7.5 Feet	7.5 Feet	10 Feet
Cable Gauge	1/0	4/0	4/0	4/0	4/0	4/0	4/0	4/0
Dimensions	18 ½" x 19 ¾" x 11 ¼"	41" x 25" x 19"	41" x 25" x 19"	41" x 25" x 19"	41" x 25" x 19"	41" x 25" x 19"	41" x 25" x 19"	18" x 24" x 15"
Weight	51 lbs	99 lbs	106 lbs	106 lbs	112 lbs	115 lbs	115 lbs	130 lbs

⚠ WARNING

- Read and follow all safety messages in instructions
- Read safety precautions on pages W1 to W4

Heavy Duty Jump-Start Carts Giving An Engine The Power It Needs To Start.

FACILITIES MAINTENANCE

Fuel Gas and CO Analyzers

SPECIFICATIONS / MODEL	TPI709A740	TPI712A740	TPI716	TPI716N
CO Measurement	0-10,000 ppm	0-10,000 ppm	0-10,000 ppm	0-10,000 ppm
O2 Measurement	0-25%	0-25%	0-25%	0-25%
NO Measurement	n/a	n/a	n/a	0-5,000 ppm
NOx (Calculated)	n/a	n/a	n/a	0-5,250 ppm
CO2 Measurement	0-25%	0-25%	0-25%	0-25%
CO/CO2 Ratio	0 to 0.999	0 to 0.999	0 to 0.999	0 to 0.999
Combustible Leak Indication	no	no	yes	yes
Pressure	yes	yes	yes	no
Pressure Differential	yes	yes	yes	no
Stack Temp (CH1)	yes	yes	yes	yes
Ambient Temp (CH2)	yes	yes	yes	yes
Temperature Differential	yes	yes	yes	yes
Excess-Air	yes	yes	yes	yes
Air-Free (CO)	yes	yes	yes	yes
Efficiency	yes	yes	yes	yes
Store Memory	50	50	50	50
Logger Memory	no	yes	yes	yes
IRDA (optional)	no	yes	yes	yes
Battery	3 “AA” batteries	rechargeable	rechargeable	rechargeable
Standard Accessories Included	TPI709 Analyzer, flue probe, silcon tubing, beaded temp probe, brass fittings, carrying case and TPIA740 printer	TPI712 Analyzer, flue probe, silcon tubing, beaded temp probe, brass fittings, carrying case and TPIA740 printer	TPI716 Analyzer, flue probe, silcon tubing, beaded temp probe, brass fittings, combustable gas probe, carrying case	TPI716N Analyzer, flue probe, silcon tubing, beaded temp probe, brass fittings, combustable gas probe, carrying case

TPI709A740 / TPI712A740
TPI716 / TPI716N

Choose from a complete line of flue gas and CO analyzers. Calculate CO2, gross or net efficiency and excess air. All units measure CO, O2 pressure, temperature and, depending on the model, NOX.

NOTE:When selecting oil as fuel be sure to use the optional TPI773 oil filter or reading could become erratic.

TPI750A Refigerant Leak Detector

- 0.2 ounces per year sensitivity
- Detects all existing refrigerants and blends including 404A, PURON, R507 (AZ50), 1234YF
- 400 hour sensor life under normal use
- Easy one-hand, thumb wheel operation

TPI750A

TPI753A Refigerant Leak Detector

- 0.1 ounces per year sensitivity
- Detects all existing refrigerants and blends including 404A, PURON, R507 (AZ50), 1234YF
- 400 hour sensor life under normal use
- Pump driven: finds and clears quicker for finding leaks faster

TPI753A

TPI621C3 Manometer Kit

- Measure high efficiency gas and oil equipment pressure to make proper adjustments and maximize efficiency
- Kit includes:
- TPI621 with resolution of 0.001" of H20
- Range of ±120" of H20
- TPIA612 protective tilt stand boot
- (2) TPIA605 ¼ inch tapered "T's
- (2)TPIA603 brass fittings (1/4 inch NPT to ¼ inch barb)
- TPIA774 (six foot of silicone tubing)
- (2) TPIA776 static tips
- Carrying case.

TPI621C3

TPI1010A IAQ Meter

- Calculate percent outside air to maintain acceptable
- CO2 levels in buildings and work spaces
- Print test data with date and time stamp using optional A740 printer
- Measure and display Carbon Dioxde(CO2) and Carbon Monoxide
- Measure ambient air temperature
- Measure relative humidity, dewpoint and wet bulb
- Log up to 10,000 readings in 1second to 1 hour intervals
- Download to computer via optional TPIA368 USB cable

TPI1010A

TPI343C1 Digital Thermometer

- Auto field calibrate in less than 10 seconds in ice water to achieve +/- 1° F system (tester & probe) accuracy within 30 to 120° F temperature range
- TPI343 can measure -58 to +2,462° depending upon the probe used
- Durable TPICK21M pipe clamp probes for one hand operation on suction lines
- T1, T2, T-differential, Min, Max, Data hold, and selectable C/F°
- Comes with tilt-stand, protective boot, two TPICK21M, and TPIA340 soft pouch

TPI343C1

TPI575C1 Dual Air Velocity Meter

- Vane: Air flow 0.4 to 25 m/s (Also reads km/s, ft/min, knots/h,miles/h)
- Hotwire: Air flow 0.2 to 20 m/s (Also reads km/s, ft/min, knots/h, miles/h)
- Temperature -5 to 175° F (-20 to 80°C).
- Data record function for maximum and minimum temperature and air velocity readings
- 39" cable length with Lemo connector
- Data hold
- Auto power off
- Protective boot and soft carrying case included

TPI575C1

TPI605 Digital Vacuum Meter

- Measure vacuum 15 to 12,000 microns
- Display updates every 0.5 seconds
- Read vacuum in seven international units of measure: microns, PSI, inHg, mBar, Pascals, Torr, and mTorr

TPI605

TPI775 Combination CO/ Combustible Gas Detector

TPI775

- Combo ambient CO measurement and combustible gas leak detector
- One-hand easy to use
- Auto and manual zero
- Adjustable tic rate
- Audible & visual alarms

TPI720B Combustible Gas Detector

TPI720B

- Similar to TPI775 but withoutCo-Detection

TPI510 Solar Irradiance Meter

TPI510

- Measures maximum solar energy angle
- Displays results in W/m² or BTU
- Range of 0 to 1999 W/m² or 0 to 634 BTU
- Min/Max and Data Hold functions

TPI50 AC Voltage Tester

TPI50

- Non-contact voltage detector
- 50 to 1,000 volts
- Audio and visual alert
- Always on, no switch required
- UL listed

TPISDIT300 Resistance Tester

TPISDIT300

Digital Insulation Resistance Tester with AC Volts.

- Insulation Resistance Ranges: 20MΩ, 200MΩ, 2000MΩ
- Test Voltages: 250V, 500V, 1000V
- Continuity Ranges: 2Ω, 20Ω

TPI9041 Vibration System Tester

TPI9041

- High level vibration analysis
- Automatic reporting and alerts for designated setting levels
- C-Trend software to store and analyze vibration, lubrication, temperature, oil pressure, etc.

TPI381, TPI383, TPI384 Dual IR Contact and Non-Contact Temp Tester

TPI381

Measures surface temperature without the use of a probe.

- Easy to use single button operation
- 0.1 resolution for best reading (380/381)
- Last reading held for 30 seconds
- Soft holster pouch included
- Large, easy to read backlit display
- °C and °F selectable
- Temperature ranges:
  - TPI381: 0°F to 572°F (-18°C to 300°C)
  - TPI383: -31°F to 999°F v (-35°C to 560°C)
  - TPI384: -4°F to 1,832°F (-20°C to 1,000°C)

TPI376C1 I/R Contact/ Non-Contact Temp Tester

TPI376c1

Combines IR with contact temperature measurement. Includes:

- TPI376 IR Thermometer Temp. Range: -58°F to 950°F (-50°C to 510°C)
- TPIGK13M K-type probe
- TPIHK11M handle
- TPICK15M HD surface probe
- TPIGK16M air probe
- TPICK13M chisel probe
- TPIA905 carrying case

TPI9080K1 Vibration Testing Kit

- Identifies bearing problems with BDU reading
- Identify Balance, alignment, and looseness problems
- Asset management and trending
- Accelerometer included

TPI395 Refractometer

TPI395

Accurately measures the freezing point of fluids used in hydronic heating systems. Measures propylene, glycol, ethylene, and battery fluid

TPI397 pH Meter - Pen Style

TPI397

- Wide pH range of 0.10-14.00pH covering most applications
- Operating temperature from 40 -120 ºF (5 - 50 ºC) allows for temperature compensated readings
- Waterproof design protects the meter
- Low power consumption extends battery life for low operation costs and reliability
- Auto-off function turns power off

TPI390A Total Dissolved Solids Meter

TPI390A

- Test make-up water to prevent scale formation, corrosion, and embrittlement
- Test condensate water in cooling tower/humidifier reservoir applications to prevent bacterial growth
- Reduce water and chemical consumption in boilers and cooling towers
- Prevent low quality wet steam generation in boilers due to foaming

TPI9070 Smart Vibration Meter

TPI9070

- ISO Built-in Alarms
- Identify bearing problems with BDU Reading
- Identify balance, alignment, looseness problems with our built in band filters
- 800 line FFT (spectrum)
- Ruggedized IP67 case
- 3-year Limited Warranty
- Full Color OLED Display
- Built-in accelerometer with interchangeable stinger and magnetic mount

UNIVERSAL COAX CABLE CONNECTOR KITS

Universal Connector Kits provide the exact adapters you need for mating or repairing coax cables. Quickly and easily make repair fittings yourself with the proper ends and the threaded "Universal Interface" connector. Connectors screw together in seconds without soldering or crimping The machined brass connectors are silver or zinc plated with gold plated connector tips and insulated with teflon seals. Use the components you need, then reorder as needed to keep the kit ready for your next custom connector project. All components are available from Snap-on Industrial.

Adapter end + Universal Interface + Adapter end = fast and easy coaxial cable repair

TPI3000A 30 Piece Standard Universal Connector Kit

TPI5000A 40 Piece Master Universal Connector Kit

Standard kit offers basic selection of connectors. Master Kit Includes all of the Standard Kit components plus T-connectors, Banana connector and BNC connector. Ideal for computer, video and military field work.

TPI5010 Universal Adapter Cable Kit (RG58)

⚠ WARNING

- Read and follow all safety messages in instructions
- Read safety precautions on pages W1 to W4

TPI460 Dual Trace, 20MHz Oscilloscope with True RMS Digital Multimeter With Backlight

TPI460

- 20 MHz Bandwidth captures signals from AC/DC drive motors, sensors, actuators, line and control voltages, UPS and industrial machines
- Curser Readout measures the width and amplitude of the signal and display it on the screen instead of trying to figure it out manually
- Decibels accurately measure sound signals
- Pre- and Post- Triggering views the waveform before and after the point the scope triggers at to find glitches
- Trend Mode graph readings over a predetermined time period to check for surges or dropouts
- Dual Input views two waveforms on the display for comparison and troubleshooting

Applications:

- Power quality
- Variable speed drives
- Industrial motor controls
- Battery testing
- Programmable logic controls
- NC/CNC machines
- Uninterruptible power supplies
- Audio/Video
- Industrial lighting controls
- Factory automation
- Line conditioners
- Voltage regulators
- Inverters
- Gaming industry

TPI192 50,000 Count True RMS Digital Multimeter: CATIII 1,000VAC, CATIV 600VAC TPI194 50,000 Count True RMS Digital Multimeter

TPI192 / TPI194

- Large 50,000 count display increases resolution and improves accuracy (1.7" x 2.75", 43mm x 70mm)
- Triple Display shows more than one reading simultaneously
- 51 Segment Analog Bar Graph to catch fast AC fluctuations
- Back Light (LED Type) allows viewing in any light condition
- Auto Range automatically selects the best range for the measurement
- Separate battery and fuse compartment for easy replacement
- AC voltage and current waveforms found on controls and circuits
- Silicone 1,000V CAT III, 600V CAT IV, 10A test leads (CE & cUL listed)
- Capacitance measures the value of capacitors
- Diode Test displays approximate forward bias voltage
- Continuity and buzzer to check for opens and shorts
- Time Stamp Logging logs up to 100 readings (min/max/avg)
- Pulse Width measures the duration of a pulse
- Duty Cycle displays the total "on" time of a component
- Inductance measures the value of inductors and coils

Applications:

- Power Quality
- Industrial MotorControls
- View waveform to verify power equality delivered to variable speed drives.
- Measure voltage and frequency at the same time
- 400µF to check motor start and run capacitors
- DC µAmps for checking flame safety controls
- DC mV for checking thermocouples

TPI440 Single Trace, 1MHz Oscilloscope with True RMS Digital Multimeter

TPI440

- Auto Ranging 4,000 Count True RMS DMM: The TPI440 has 9 measurement functions and 0.3% basic DC accuracy
- 1 MHz Single Trace Oscilloscope: View industrial power signals such as motor controls, and switching power supplies with detail and clarity
- Trend Mode: Graph readings over a predetermined time period to check for surges or dropouts
- Component Test: Check voltage-current signatures on resistors, capacitors, and semiconductors
- Logic Test: Indicates transitions up to 2MHz
- Frequency Counter: Measure low frequency signals from 1Hz to 2MHz and display duty cycle, pulse width and period

Applications:

- Power Quality
- Industrial Motor Controls
- View waveform to verify power equality delivered to variable speed drives
- Measure voltage and frequency at the same time
- 400µF to check motor start and run capacitors
- DC µAmps for checking flame safety controls
- DC mV for checking thermocouples

TPI196 50,000 Count 0-24mA

TPI196

- Large 50,000 count display increases resolution and improves accuracy (1.7" x 2.75", 43mm x 70mm)
- 0-24mA output for process controls
- Triple Display shows more than one reading simultaneously
- 51 Segment Analog Bar Graph to catch fast AC fluctuations
- Back Light (LED Type) allows viewing in any light condition
- Auto Range automatically selects the best range for the measurement
- Separate battery and fuse compartment for easy replacement
- Continuity and buzzer to check for opens and shorts
- Includes protective boot and silicone rubber (CAT IV 600V) test leads

Applications:

- 4~20mA Transducers (Pressure, Strain, Temperature, Flow, Level)
- Loop Powered Isolators
- Two Wire Transmitters
- Valve Positioners
- Signal Conditioners
- Process Scaled Indicators

TPI270 Clamp-on Ammeter

Measure motor in-rush & run current. Measure temperature differential with relative mode using any K-type probe (no adapter required)

- Non-contact voltage tester function
- Slim jaw and body design for use in crowded electrical panels
- Up to 400 AC amps with 0.01 resolution
- Capacitance, Hz, VAC, VDC, Ohms, and continuity

Accessories For: TPI440, TPI460, & TPI192/TPI194

Stock No.	Description
TPIA402	PC software and RS232 cable for TPI440
TPIA403	Protective boot for TPI440
TPIA900	Soft zipper carrying case for TPI440 with shoulder strap
EETA503C	Low current adapter for TPI440, TPI460, TPI192/TPI194
EEDM5030	Current shunt adapter for TPI440, TPI460, TPI192/TPI194
TPIA312	Dual input temperature adapter for TPI440, TPI460, TPI192/TPI194
TPIA251	400 AC mV output adapter for TPI440, TPI460, TPI192/TPI194
EETA501C	400 AC/DC amp adapter for TPI440, TPI460, TPI192/TPI194
EETA502C	1,000 AC/DC amp adapter TPI440, TPI460, TPI192/TPI194

Q Series Oil Fired Hot Water Pressure Washer

- Offer extreme durability and portability in an electric motor, gasoline engine or diesel engine driven package
- Triplex plunger pump with ceramic plungers and stainless steel valves
- Adjustable pressure
- Adjustable Thermostat and pressure pop-off
- Chemical Injection
- Trigger Gun with 50' non marking hose
- Dual wand with side handle and detergent tip
- Quick change tips in 0˚, 15˚, 25˚ and 40˚
- Powder coated frame with wand/hose rack
- 13" tires
- Schedule 80 coil with stainless cold wrap
- Rust free burner fuel tank
- Oil fired burner uses diesel fuel or kerosene
- All hot water machines must be properly vented if operated indoors
- Fully portable, no electricity required, equipped with 12 volt oil fired burner
- Thermal relief valve on pump
- Group 24 battery not included

Stock No.	PSI/bar	GPM/lpm	HP/cc	Voltage/Engine	Phase/Fuel Tank Cap.	Burner Fuel Capacity	Dimensions	Ship Weight
CAM3000QD	3000/207	4/15.2	10 H.P.	Diesel	5.3 Quarts	9 Gallon	54"L x 32"W x 49"H	650 lbs.

Diesel Powered Skid

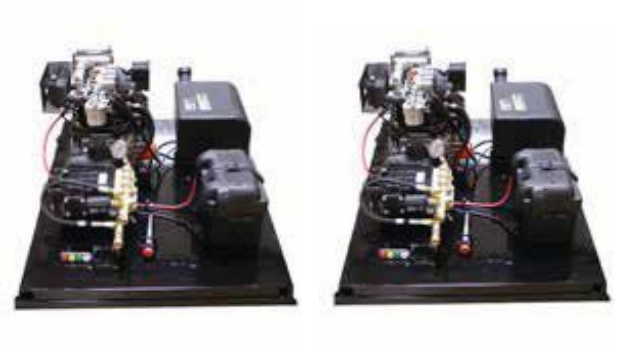

- For long hours of dependable operation in the most demanding applications
- Triplex plunger pump with ceramic plungers and stainless steel valves
- Adjustable pressure
- Thermal relief valve
- Chemical Injection
- Trigger Gun with 50' non marking hose
- Heavy duty 36" wand with quick change tips in 0˚, 15˚, 25˚, 40˚ soap tip
- Powder coat frame
- Group 24 battery not included on E/S models

Stock No.	PSI/bar	GPM/lpm	HP/cc	Voltage/Engine	Phase/Fuel Tank Cap.	Pump Max Temp	Dimensions	Ship Weight
CAM4000D	4000/276	4/15.2	14 H.P.	Diesel E/S	7.4 Quarts	160˚F	36"L x 30"W x 30"H	300 lbs.
CAM5000D	5000/345	4.5/17.1	20 H.P.	Diesel E/S	7.4 Quarts	160˚F	36"L x 30"W x 30"H	500 lbs.

Hot Water Trailer Models

- Combines durability, versatility with portability -
- Everything at your fingertips for the toughest cleaning jobs!
- Triplex plunger pump with ceramic plungers and stainless steel valves
- Adjustable pressure unloader valve
- Adjustable Thermostat
- Chemical Injection
- 100' x 3/8" hose on manual reel
- 150' x 5/8" garden hose for tank refill and a manual reel
- Trigger Gun with 100' hose
- Dual wand with detergent tip
- Quick change tips 0˚, 15˚, 25˚ and 40˚
- Powder coat frame and trailer
- Trailer has full diamond plate deck, lights and is road ready
- Schedule 80 coil with cold wrap
- Oil fired burner uses diesel fuel or kerosene

Stock No.	PSI/bar	GPM/lpm	HP/cc	Engine	Water Tank Capacity	Engine Tank Capacity	Burner Fuel Capacity	Dimensions	Ship Weight
CAMCBG4055DT	4000/276	5.5/20.9	20 H.P.	Hatz Diesel	300 Gallon	5 Gallon	9 Gallon	186"L x 74"W x 72"H	2,200 lbs.
CAMCBG3055DT	3000/207	5.5/20.9	14 H.P.	Hatz Diesel	300 Gallon	9 Gallon	9 Gallon	186"L x 74"W x 72"H	2,200 lbs.

⚠ WARNING

- Read and follow all safety messages in instructions
- Read safety precautions on pages W1 to W4

SHOP ORGANIZATION

Compact Spring Retractable Hose Reels

Compact, lightweight professional grade spring rewind hose reel that is small enough to do heavy-duty jobs where space or budget is limited.

- Heavy gauge 12GA steel base & support post
- Brass NPT swivel inlet machined from solid
- CoxComposite™ Hub that integrates a high strength composite with self lubricating bronze bearings
- CoxComposite™ Grommet with continuous radius design that does not pinch or catch the cord during operation

Stock No.	Hose I.D., Inches	Hose O.D., Inches	Hose Length, Feet	Maximum Pressure, PSI	Weight
CXRLGLP115	¼"	½"	15'	300	9
CXRLGLP125	¼"	½"	25'	300	11
CXRLGLP310	⅜"	21/32"	10'	300	9
CXRLGLP320	⅜"	21/32"	20'	300	11

CXRLGLP125

CoxComposite™ Hub

CoxComposite™ Grommet

Spring Retractable Hose Reels

Performance and Super-Hub™ (dual axle support system for extra stability) Series - Perfect to pull the hose out of the way in work shop areas and utility vehicles. Can be wall, ceiling, floor or vehicle mounted. T (Truck) Series - Ideal for stationary and mobile units such as service trucks featuring air compressor or product tank.

- Heavy gauge ¼" steel base & support post
- Factory-matched cartridge-style spring motor
- Brass NPT swivel inlet machined from solid
- 1" solid steel axle with 1" lubricated precision bearings
- Guide arm adjusts to wall, floor & overhead positions
- SH, MP & HP Series features dual axle support with Super Hub™
- T Series features triple axle support with a full frame & Super Hub™
- Choice of Standard or EZ-Coil® Models

CXRMPN450

CXREZPLP350

Also available in EZ-COIL®

CXREZTSH350

SH, MP & HP Series features dualaxle support with Super Hub™



T Series features triple axle support with a full frame & Super Hub™

In 2000 Coxreels developed EZ-Coil®, a patented safety system that retracts up to 80% slower than conventional reels. EZ-Coil® is an exclusive Coxreels feature protecting your facility, property & most importantly yourself! NOBODY SHOULD BE WITHOUT EZ-COIL®!

Standard Stock No.	EZ-Coil® Stock No.	Series	Hose I.D., Inches	Hose O.D., Inches	Hose Length, Feet	Maximum Pressure, PSI	Weight
- LOW PRESSURE FOR AIR / WATER							
CXRPLP325	CXREZPLP325	P	⅜"	21/32"	25'	300	28
CXRPLP350	CXREZPLP350	P	⅜"	21/32"	50'	300	43
CXRSHN350	CXREZSH350	SH	⅜"	21/32"	50'	300	50
CXRTSHN350	CXREZTSH350	T	⅜"	21/32"	50'	300	61
CXRTSHN3100	CXREZTSH3100	T	⅜"	21/32"	100'	300	85
CXRPLP425	-	P	½"	27/32"	25'	300	44
CXRPLP450	CXREZPLP450	P	½"	27/32"	50'	300	48
CXRSHN450	CXREZSH450	SH	½"	27/32"	50'	300	54
CXRTSHN450	CXREZTSH450	T	½"	27/32"	50'	300	63
CXRTSHN4100	CXREZTSH4100	T	½"	27/32"	100'	300	95
CXRTSHN550	CXREZTSH550	T	¾"	1 5/32"	50'	300	83
CXRTSHN650	-	T	1"	1 1/16"	50'	300	98
- MEDIUM PRESSURE FOR OIL APPLICATIONS							
CXRPMP325	-	P	⅜"	21/32"	25'	3000	49
CXRMPN350	CXREZMP350	MP	⅜"	21/32"	50'	3000	65
CXRTMPN350	CXREZTMP350	T	⅜"	21/32"	50'	3000	74
CXRTMPN3100	-	T	⅜"	21/32"	100'	3000	106
CXRPMP425	CXREZPMP425	P	½"	21/32"	25'	2500	49
CXRMPN450	CXREZMP450	MP	½"	21/32"	50'	2500	67
CXRTMPN450	CXREZTMP450	T	½"	21/32"	50'	2500	77
CXRTMPN4100	-	T	½"	21/32"	100'	2500	106
- HIGH PRESSURE FOR GREASE APPLICATIONS							
CXRPHP125	CXREZPHP125	P	¼"	17/32"	25'	5000	48
CXRHPN150	CXREZHP150	HP	¼"	17/32"	50'	5000	64
CXRTHPN150	CXREZTHP150	T	¼"	17/32"	50'	5000	74
CXRTHPN1100	CXREZTHP1100	T	¼"	17/32"	100'	5000	104
CXRPHP325	CXREZPHP325	P	⅜"	21/32"	25'	4000	49
CXRHPN350	CXREZHP350	HP	⅜"	21/32"	50'	4000	65
CXRTHPN350	CXREZTHP350	T	⅜"	21/32"	50'	4000	78

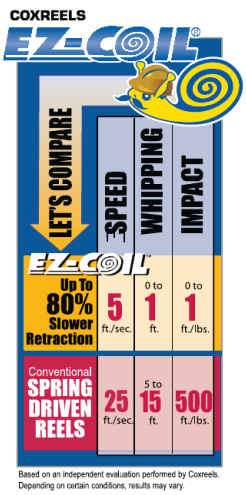

Combo Air / Electric Spring Driven Reels

Combo reels are perfect for applications that require pneumatic air and an electrical power feed with one mounting pattern. This unit allows for half the installation time needed to install two reels at one station. The single expanded 1/4" steel base provides stability and space efficiency.

- Compact two reel assembly in one convenient mounting base
- Brass NPT swivel inlet machined from solid
- Each reel operates independently
- Choice of electrical accessory

Stock No.	Electric Cord			Air Hose			Hose & Cord Length Each	Weight
	Accessory	AWG	Amps	Hose I.D.	Hose O.D.	PSI		
CXRCL350516A	Single Industrial Receptacle	16	13	3/8"	21/32"	300	50	94
CXRCL350512B	Quad Industrial Receptacle	12	20	3/8"	21/32"	300	50	97
CXRCL350516C	Fluorescent Tube Light	16	0.3	3/8"	21/32"	300	50	94
CXRCL350516D	Fluorescent Angle Light	16	13	3/8"	21/32"	300	50	94
CXRCL350516E	Incandescent Cage Light	16	13	3/8"	21/32"	300	50	94
CXRCL350512F	G.F.C.I. Receptacle	12	20	3/8"	21/32"	300	50	96

Compact Spring Retractable Power Cord Reels

Ground-breaking design sets a new bar as the ideal cord management solution capable of fulfilling any commercial or industrial application where space is limited. For indoor use.

- CoxComposite™ Hub that integrates a high strength composite with self lubricating bronze bearings
- CoxComposite™ Grommet with continuous radius design that does not pinch or catch the cord during operation.
- Choice of electrical accessory

CXRCL350516C

CXRPC103012A

CoxComposite™ Hub

CoxComposite™ Grommet

Stock No.	Accessory	AWG	Amps	Cord Length, Feet	Weight
CXRPC103012A	Single Industrial Receptacle	12	20	30'	17
CXRPC103012B	Quad Industrial Receptacle	12	20	30'	18
CXRPC103016C	Fluorescent Tube Light	16	0.3	30'	15
CXRPC103016D	Fluorescent Angle Light	16	13	30'	16
CXRPC103016E	Incandescent Cage Light	16	13	30'	14
CXRPC103012F	G.F.C.I. Receptacle	12	20	30'	19
CXRPC103012X	No Accessory	12	20	30'	18
CXRPC103016X	No Accessory	16	13	30'	14

Spring Retractable Power Cord Reels

PC Series spring driven “Power Cord" reels are heavy duty, industrial grade power sources.

- Includes 5' pigtail & grounding plug
- Heavy gauge powder coated steel components cover for simple slip ring routine maintenance.
- Choice of electrical accessory
- Choice of Standard or EZ-Coil® Models

Also available in EZ-COIL®

CXRPC135012F

CXREZPC13512A

Standard Stock No.	EZ-Coil® Stock No.	Accessory	AWG	Amps	Cord Length, Feet	Weight
CXRPC135012A	CXREZPC3512A	Single Industrial Receptacle	12	20	50'	40
CXRPC135012B	CXREZPC3512B	Quad Industrial Receptacle	12	20	50'	41
CXRPC135016C	CXREZPC3516C	Fluorescent Tube Light	16	0.3	50'	37
CXRPC135016D	CXREZPC3516D	Fluorescent Angle Light	16	13	50'	37
CXRPC13516D2	CXREZPC016D2	Dual Fluorescent Light	16	12	50'	37
CXRPC135012F	CXREZPC5012F	G.F.C.I. Receptacle	12	20	50'	42
CXRPC135012X	CXREZPC5012X	No Accessory	12	20	50'	40
CXRPC135016X	-	No Accessory	16	13	50'	36

⚠ WARNING

- Read and follow all safety messages in instructions
- Read safety precautions on pages W1 to W4

COLUMBUS MCKINNON

CM Bandit Ratchet Lever Hoist

- Compact and portable design - Can be easily transported and used in confined areas
- Free-Chaining - allows for quick takeup and positioning of slack chain.
- 360° Rotating handle - Allows for versatile rigging options

Stock No.	Description	Capacity (Tons)	Lift (feet)	Lever Pull to Lift Rated Load LBF	Weight (lbs)
BAN07505	CM Bandit Ratchet Lever Hoist	¾	5	45	13.6
BAN07510	CM Bandit Ratchet Lever Hoist		10		15.7
BAN07515	CM Bandit Ratchet Lever Hoist		15		18
BAN07520	CM Bandit Ratchet Lever Hoist		20		20.1
BAN15005	CM Bandit Ratchet Lever Hoist	½	5	64	20.7
BAN15010	CM Bandit Ratchet Lever Hoist		10		24.3
BAN15015	CM Bandit Ratchet Lever Hoist		15		27.9
BAN15020	CM Bandit Ratchet Lever Hoist		20		31.5

Series 602/603 Mini-Lever Hoist

- Compact design - small and lightweight allows you to take it where ever you go, fits inyour toolbox
- Sturdy construction for years of use - forged upper and lower hooks, impact resistant, all steel frame, plated load chain

Stock No.	Description	Capacity (tons)	Lift (feet)	Weight (lbs)
CMS0210	CM Series 602 Mini Lever Hoist, 550 lbs 5' lift	¼	5	6
CMS0214	CM Series 602 Mini Lever Hoist, 550 lbs 10' lift		10	7
CMS0215	CM Series 603 Mini Lever Hoist, 1100 lbs. 5' lift	½	5	7
CMS0216	CM Series 603 Mini Lever Hoist, 1100 lbs. 10' lift		10	8

Series 653 Manual Lever Hoist

- Sturdy construction for years of use - forged upper and lower hooks, impact resistant, all steel frame, plated load chain
- Lowest handle pull force in the industry - reduces related injuries, easy operation in confined spaces
- True one-handed free chaining - allows for fast and easy load attachment

Stock No.	Description	Capacity (tons)	Lift (feet)	Weight (lbs)
CMS5310	CM Series 653 Lever Hoist, ¾ ton, 5' lift	¾	5	19
CMS5311	CM Series 653 Lever Hoist, ¾ ton, 10' lift	¾	10	21
CMS5315	CM Series 653 Lever Hoist, 1 ½ ton, 5' lift	1 ½	5	31
CMS5316	CM Series 653 Lever Hoist, 1 ½ ton, 10' lift	1 ½	10	36
CMS5320	CM Series 653 Lever Hoist, 3 ton, 5' lift	3	5	51
CMS5321	CM Series 653 Lever Hoist, 3 ton, 10' lift	3	10	59

Series 640 Manual Lever Hoist

- Made in the U.S.A - Approved for use on Government Projects
- Simple construction with few parts - less downtime since it is reliable and easy to maintain
- Weatherproof construction - can be used for indoor and outdoor applications

Stock No.	Description	Capacity (tons)	Lift (feet)	Weight (lbs)
CMS4043	CM Series 640 Puller Lever Hoist, ¾ ton, 5' Lift	¾	5	16.0
CMS4060	CM Series 640 Puller Lever Hoist, ¾ ton, 10' Lift	¾	10	20.0
CMS4045	CM Series 640 Puller Lever Hoist, 1 ½ ton, 5' Lift	1 ½	5	26.0
CMS4062	CM Series 640 Puller Lever Hoist, 1 ½ ton, 10' Lift	1 ½	10	31.0
CMS4047	CM Series 640 Puller Lever Hoist, 3 ton, 5' Lift	3	5	38.0
CMS4065	CM Series 640 Puller Lever Hoist, 3 ton, 10' Lift	3	10	47.0

Cyclone Hand Chain Hoist

- Made in the U.S.A - Approved for use on Government Projects
- Load limiter is a standard option - overload protection for proper and safe use of hoist
- Highest efficiency in the industry - greater lift with minimum effort
- Easy to maintain - lower maintenance costs, interchageable parts

Stock No.	Description	Capacity (tons)	Lift (feet)	Weight (lbs)
CMS4621	CM Cyclone Hand Chain Hoist, ¼ ton, 10' Lift	¼	10	40.0
CMS4732	CM Cyclone Hand Chain Hoist, ¼ ton, 20' Lift	¼	20	55.0
CMS4622	CM Cyclone Hand Chain Hoist, ½ ton, 10' Lift	½	10	40.0
CMS4733	CM Cyclone Hand Chain Hoist, ½ ton, 20' Lift	½	20	55.0
CMS4624	CM Cyclone Hand Chain Hoist, 1 ton, 10' Lift	1	10	43.0
CMS4734	CM Cyclone Hand Chain Hoist, 1 ton, 20' Lift	1	20	60.0
CMS4625	CM Cyclone Hand Chain Hoist, 1 ½ ton, 10' Lift	1 ½	10	70.0
CMS4735	CM Cyclone Hand Chain Hoist, 1 ½ ton, 20' Lift	1½	20	93.0
CMS4626	CM Cyclone Hand Chain Hoist, 2 ton, 10' Lift	2	10	70.0
CMS4894	CM Cyclone Hand Chain Hoist, 2 ton, 20' Lift	2	20	92.0
CMS4627	CM Cyclone Hand Chain Hoist, 3 ton, 10' Lift	3	10	103.0
CMS4736	CM Cyclone Hand Chain Hoist, 3 ton, 20' Lift	3	20	144.0
CMS4629	CM Cyclone Hand Chain Hoist, 5 ton, 10' Lift	5	10	138.0

Series 622 Hand Chain Hoist

- Simple, efficient, economical design - get the job done while staying within budget
- Compact, low headroom design - lightweight and easy to install or move, even in confined spaces

Stock No.	Description	Capacity (tons)	Lift (feet)	Weight (lbs)
CMS2216	CM Series 622 Hand Chain Hoist, ½ Ton, 15' Lift	½	15	25.0
CMS2231	CM Series 622 Hand Chain Hoist, ½ Ton, 20' Lift	½	20	30.0
CMS2217	CM Series 622 Hand Chain Hoist, 1 Ton, 15' Lift	1	15	30.0
CMS2262	CM Series 622 Hand Chain Hoist, 1 Ton, 20' Lift	1	20	38.0
CMS2218	CM Series 622 Hand Chain Hoist, 2 Ton, 15' Lift	2	15	71.0
CMS2233	CM Series 622 Hand Chain Hoist, 2 Ton, 20' Lift	2	20	80.0
CMS2230	CM Series 622 Hand Chain Hoist, 3 Ton, 15' Lift	3	15	99.0
CMS2214	CM Series 622 Hand Chain Hoist, 3 Ton, 20' Lift	3	20	109.0

⚠ WARNING

- Read and follow all safety messages in instructions
- Read safety precautions on pages W1 to W4

COLUMBUS MCKINNON

Lodestar Electric Chain Hoist

- Largest installed base of any hoist in the industry
- Rugged, long life design
- Grease lubrication - lifetime protection for less maintenance and improved
- Made in the U.S.A

Stock No.	Description	Capacity (tons)	Lift (feet)	Lifting Speed (ft/min)	Weight (lbs)
CMS3555-3651	CM Lodestar 230/460V, 3ph, 60Hz, 1 ton, 10' Lift	1	10	32	117.0
CMS4255-3651	CM Lodestar 230/460V, 3ph, 60Hz, 1 ton, 20' Lift	1	20	32	128.0
CMS3565-3658	CM Lodestar 230/460V, 3ph, 60Hz, 2 ton, 10' Lift	2	10	16	137.0
CMS4265-3658	CM Lodestar 230/460V, 3ph, 60Hz, 2 ton, 20' Lift	2	20	16	157.0
CMS9508-9559	CM Lodestar 230/460V, 3ph, 60Hz, 3 ton, 10' Lift	3	10	11	162.0
CMS9510-9559	CM Lodestar 230/460V, 3ph, 60Hz, 3 ton, 20' Lift	3	20	11	190.0

Valustar Electric Chain Hoist

- Economical unit with robust design
- Grease lubrication-lifetime protection for less maintenance and improved performance
- Made in the USA

Stock No.	Description	Capacity (tons)	Lift (feet)	Lifting Speed (ft/min)	Weight (lbs)
CMS2401C	CM Valustar 115V, 1ph, 60Hz, ¼ ton, 20' Lift	¼	20	16	68.0
CMS2403C	CM Valustar 115V, 1ph, 60Hz, ½ ton, 20' Lift	½	20	16	68.0
CMS2407C	CM Valustar 115V, 1ph, 60Hz, 1 ton, 20' Lift	1	20	16	116.0
CMS2409C	CM Valustar 115V, 1ph, 60Hz, 2 ton, 20' Lift	2	20	8	150.0
CMS2402C	CM Valustar 230/460V, 3ph, 60Hz, 1/4 ton, 20' Lift	¼	20	16	66.0
CMS2404C	CM Valustar 230/460V, 3ph, 60Hz, 1/2 ton, 20' Lift	½	20	16	66.0
CMS2408C	CM Valustar 230/460V, 3ph, 60Hz, 1 ton, 20' Lift	1	20	16	117.0
CMS2410C	CM Valustar 230/460V, 3ph, 60Hz, 2 ton, 20' Lift	2	20	8	142.0

Shopstar Electric Chain Hoist

- Small compact design-easy to install and move from location to location
- Grease lubrication - lifetime protection for less maintenance and improved durability
- Made in the U.S.A

Stock No.	Description	Capacity (tons)	Lift (feet)	Lifting Speed (ft/min)	Weight (lbs)
CMS2070	CM ShopStar 115V, 1ph, 60Hz, 250 lbs	⅛	10	16	26.0
CMS2090	CM ShopStar 115V, 1ph, 60Hz, 500 lbs	¼	10	12	26.0
CMS2110	CM ShopStar 115V, 1ph, 60Hz, 1000 lbs	½	10	6	32.0
CMS2072	CM ShopStar 460V, 3ph, 60Hz, 250 lbs	⅛	10	16	28.0
CMS2077	CM ShopStar 460V, 3ph, 60Hz, 250 lbs	⅛	10	24	28.0
CMS2084	CM ShopStar 460V, 3ph, 60Hz, 500 lbs	¼	10	16	28.0
CMS2100	CM ShopStar 460V, 3ph, 60Hz, 500 lbs	¼	10	24	28.0
CMS2121	CM ShopStar 460V, 3ph, 60Hz, 1000 lbs	½	10	12	32.0

Beam Clamps

- Used as an anchor for a hoist or rigging operation, or as a tool to position and hold beams in place when welding
- Adjustable to fit wide range of beam sizes

Stock No.	Description	Capacity (tons)	Flange Width (inches)	Weight (lbs)
CMS09001W	CM Beam Clamp, 1 ton (BC-1)	1	3 - 9	8.5
CMS09002W	CM Beam Clamp, 2 ton (BC-2)	2	3 - 9	10.5
CMS09003W	CM Beam Clamp, 3 ton (BC-3)	3	3.2 - 12.6	20.25
CMS09004W	CM Beam Clamp, 5 ton (BC-5)	5	3.6 - 12.2	24.25

CBT Push Trolley

Trolleys

- Shielded ball bearings - smooth rolling motion with little effort, longer life
- Wrap around side plates - protect wheels and act as stopper to prevent movement beyond desired location
- Adjustable to fit wide range of beams

CBT Geared Trolley

	Stock No.	Description	Capacity (tons)	Std. Beam Height (inches)	Beam Flange Width (inches)	Weight (lbs)
CBT Push Trolley	CMSCBTP0025	CMCO CBT Push Trolley, ¼ ton	¼	4 - 24	2 - 8.7	19.0
	CMSCBTP0050	CMCO CBT Push Trolley, ½ ton	½	4 - 24	2 - 8.7	19.0
	CMSCBTP0100	CMCO CBT Push Trolley, 1 ton	1	5 - 24	2.3 - 8.7	26.0
	CMSCBTP0150	CMCO CBT Push Trolley, 1 1/2 ton	1 ½	6 - 24	2.3 - 8.7	46.0
	CMSCBTP0200	CMCO CBT Push Trolley, 2 ton	2	6 - 24	2.3 - 8.7	46.0
	CMSCBTP0300	CMCO CBT Push Trolley, 3 ton	3	8 - 24	3 - 8.7	86.0
	CMSCBTP0500	CMCO CBT Push Trolley, 5 ton	5	10 - 24	3.5 - 8.7	130.0
CBT Geared Trolley	CMSCBTG0100	CMCO CBT Geared Trolley, 1 ton	1	5 - 24	2.3 - 8.7	45.0
	CMSCBTG0150	CMCO CBT Geared Trolley, 1 1/2 ton	1 ½	6 - 24	2.3 - 8.7	66.0
	CMSCBTG0200	CMCO CBT Geared Trolley, 2 ton	2	6 - 24	2.3 - 8.7	69.0
	CMSCBTG0300	CMCO CBT Geared Trolley, 3 ton	3	8 - 24	3 - 8.7	111.0
	CMSCBTG0500	CMCO CBT Geared Trolley, 5 ton	5	10 - 24	3.5 - 8.7	158.0

Removable Handle Ratchet Binders

- Removable handle provides greater load security by making it less likely for load to be stolen
- Reduces overall weight

Stock No.	Description	Chain Size for Grade 43	Chain Size for Grade 70	WLL (lbs)
CMS46565	Removable Handle Ratchet Binder - Body	⅜"	5⁄16"	5400
CMS46566	Removable Handle Ratchet Binder - Body	½"	⅜"	9200
CMS46565H	Removable Handle Ratchet Binder - Handle	-	-	-

CMG Ratchet Binders

- Economical unit where handle remains attached to ratchet binder; durable construction

Stock No.	Description	Chain Size for Grade 43	Chain Size for Grade 70	WLL (lbs)
CMS48365CMG	⅜" Ratchet Binder	-	5⁄16	6600
CMS48366CMG	½" Ratchet Binder	-	⅜	9200

⚠ WARNING

- Read and follow all safety messages in instructions
- Read safety precautions on pages W1 to W4

COLUMBUS MCKINNON

Super Strong Carbon Steel Shackle

- Highest working load limit in the industry - provides extra protection and helps insure a safer lift
- Save money by having the ability to use a smaller shackle vs. the competiti
- Made in the USA

Stock No.	Description	Size Diameter (in)	WLL (tons)
CMSM646P	Super Strong Shackle, Carbon Steel, Painted, ¼"	¼	¾
CMSM647P	Super Strong Shackle, Carbon Steel, Painted, 5⁄16"	5⁄16	1
CMSM648P	Super Strong Shackle, Carbon Steel, Painted, ⅜"	⅜	1 ½
CMSM650P	Super Strong Shackle, Carbon Steel, Painted, ½"	½	3
CMSM651P	Super Strong Shackle, Carbon Steel, Painted, ⅝"	⅝	4 ½
CMSM652P	Super Strong Shackle, Carbon Steel, Painted, ¾"	¾	6 ½
CMSM653P	Super Strong Shackle, Carbon Steel, Painted, ⅞"	⅞	8 ½
CMSM654P	Super Strong Shackle, Carbon Steel, Painted, 1"	1	10
CMSM656P	Super Strong Shackle, Carbon Steel, Painted, 1 ¼"	1 ¼	14
CMSM657P	Super Strong Shackle, Carbon Steel, Painted, 1 ½"	1 ½	20
CMSM677P	Super Strong Shackle, Carbon Steel, Painted, 1 ¾"	1 ¾	30
CMSM658P	Super Strong Shackle, Carbon Steel, Painted, 2"	2	35

Grade 30 Proof Coil Chain

- Manufactured to meet ASTM & NACM specifications
- Typically used as barrier chain, trailer safety chains, light construction, and the marine industry
- Not for overhead lifting

Stock No.	Description	Size (in)	WLL (lbs)	Feet per Pail	Weight per 100' (lbs)
CMS671410	Grade 30 Zinc Plated Pails, 3⁄16"	3⁄16	800	250	37
CMS671411	Grade 30 Zinc Plated Pails, ¼"	¼	1300	140	60
CMS671412	Grade 30 Zinc Plated Pails, 5⁄16"	5⁄16	1900	90	81
CMS671413	Grade 30 Zinc Plated Pails, ⅜"	⅜	2650	60	133
CMS671015	Grade 30 Zinc Plated Pails, ½"	½	4500	90	278

Grade 70 Binder Chain Assemblies

- Meets all Department of Tranportation requirement
- No ultra-violet degrading like with synthetic straps

Stock No.	Description	Size (in)	WLL (lbs)	Weight Each (lbs)
CMS638277	5⁄16" x 16' Grade 70 with Clevis Hooks - In Bag	5⁄16	4700	17.1
CMS638266	5⁄16" x 20' Grade 70 with Clevis Hooks - In Bag	5⁄16	4700	22.1
CMS638268	⅜" x 16' Grade 70 with Clevis Hooks - In Bag	⅜	6600	26.6
CMS638267	⅜" x 20' Grade 70 with Clevis Hooks - In Bag	⅜	6600	32.9

Herc-Alloy 1000 Chain Slings

- Utilizes Herc-Alloy® 1000 Chain which has the strongest weight-to-strength ratio
- Easy to inspect and repair

Stock No.	Description	Chain Size (in)	Reach (ft)	WLL at 90° (lbs)	WLL at 60° (lbs)	WLL at 45° (lbs)	WLL at 30° (lbs)
CMS39SOSR5	Single Chain Sling - Master Link and Sling Hook, 5'	⅜	5	8800	-	-	-
CMS28SAALR10	Single Adjustable Chain Sling, 10'	9⁄32	10	4300	-	-	-
CMS39SAALR10	Single Adjustable Chain Sling, 10'	⅜	10	8800	-	-	-
CMS51SAALR10	Single Adjustable Chain Sling, 10'	½	10	15000	-	-	-
CMS28DOSR5	Double Chain Sling - Master Link and Sling Hook, 5'	9⁄32	5	-	7400	6100	4300
CMS39DOSR5	Double Chain Sling - Master Link and Sling Hook, 5'	⅜	5	-	15200	12400	8800
CMS51DOSR5	Double Chain Sling - Master Link and Sling Hook, 5'	½	5	-	26000	21200	15000
CMS28DAALR10	Double Adjustable Chain Sling, 10'	9⁄32	10	-	7400	6100	4300
CMS39DAALR10	Double Adjustable Chain Sling, 10'	⅜	10	-	15200	12400	8800
CMS51DAALR10	Double Adjustable Chain Sling, 10'	½	10	-	26000	21200	15000

OMG60253

Shop Press With Hand Pump

- Ideal for removal or installation of gears, u-joints, pulleys, wrist pins & other shop jobs
- Excellent for bending, bonding or straightening applications
- Multi position bed for work at various heights
- Heavy steel welded frame for strength and stability

Stock No.	Description
OMG60253	25 Ton Capacity

OMG31250
1250 Lbs. capacity
with rotating head

Engine Stand

- Constructed from heavy-gauge welded square tubular steel
- Extra-long handle with rubber grip for easy rotation and maneuvering
- Head plate locks in 8 positions and rotates 360º
- Only OMG31256 come with worm gears

Stock No.	Description	Rotation
OMG30750	750 Lbs. Capacity	Manual
OMG31250	1250 Lbs. Capacity	Manual
OMG31252	1250 Lbs. Capacity	Manual
OMG31256	1250 Lbs. Capacity	Gear Drive

OMG44010

Engine Cranes

- Heavy duty welded construction with rugged reinforced tubular steel
- Metered control release valve for lowering boom at a precisely-controlled rate of speed
- Special 8 ton hydraulic long rams are equipped with a patented built-in by-pass mechanism

Stock No.	Description
OMG44010	1 Ton Capacity (Fold-up Design)
OMG44020	2 Ton Capacity

OMG22903

Treadle Foot Pump

- Efficiently operates any single-acting rams up to 55 ton capacity
- Provides up to 10K PSI with standard shop air (110-175 PSI)
- Built-in pressure by-pass protects against overload operation
- Constructed of light weight corrosion-free aluminum
- Uses ⅜" NPT fluid coupler
- Stock No. OMG22903

⚠ WARNING

- Read and follow all safety messages in instructions
- Read safety precautions on pages W1 to W4

HEIN WERNER

Service Jacks

HW93642

HW93642

- One piece handle
- Flanged side plates increase strength
- Wider for more stability under a load
- Large for easy maneuvering
- Cast iron pump base for strength and durability
- Sealed hydraulic pump for durability
- Pressure relief valve prevents overloading
- Cast iron lift arm for heavy duty loads
- U-joint release mechanism for precise load control

HW93667

HW93657

- Handle adjusts to three pumping positions
- Extra long chassis for hard to reach points
- T handle with release knob for positioning and load control
- Sealed hydraulic unit keeps out grit, grime and moisture
- Cast lift arm for heavy loads
- Operates manually or with air
- Patented “Speed Pak™" reduces handle pumping
- 140PSI required for maximium load

Stock No.	Description	Capacity	Lifting Range
HW93642	Service Jack	2 Ton	4-½" - 20-¼"
HW93667	Air/Manual Long Chassis Service Jack	4 Ton	5" - 25-¾"

10 Ton Wheel Lift System

- Lifts engage wheels
- No need to remove panels on vehicle
- Raise front or rear of vehicle using a single controller
- Load retention pin allows lifts to function as stands
- Wide base ensures stability
- Completely air operated, no electrical connections
- Safety latch provides six different locked positions
- Portable, use in any area of the shop

Stock No.	Capacity per Pair	Max. Height	Power Raise	Min. Wheel Dia.	Max. Wheel Dia.
HW93693	10 Ton	24"	24"	19-½"	24-½"

HW93693

Note: Sold and to be used in pairs

Truck Air Jacks

HW93735A

HW93735A

- 8" Low height for lifting from axle or suspension
- Compact, powerful design for quicklifts
- Pressure relief valve prevents overloading
- Coated ram prevents rust, extends jack life
- Air assisted ram retract
- 3 position handle
- 2 year warranty

HW93737A

HW93737A

- Removable handle and 10 foot air hose for safe position and operation
- 10 ton capacity when used separately, 20 tons when used in pairs
- Lifting Range 17-½" to 51-½"
- Completely air-operated
- Doubles as a support stand

Stock No.	Description	Capacity	Power Raise	Min. Ht.	Max. Ht.	Required Operating Pressure
HW93737A	Trolley Air Jack	10 Ton	11-½"	17-¾"	51-½"	150 - 200 PSI
HW93735A	Wheeled Truck Jack	25 Ton	5-⅛"	8"	18"	110 - 200 PSI

Jack Stands

HW93512

HW93511

Note: Sold and to be used in pairs

HW93511 / HW93512

- Pin style column adjustment
- Heavy duty square tubing
- Large saddle securely supports load
- Attached wheels for easy movement
- (HW93511 Only)
- Ideal for fleet, agricultural and construction maintenance
- Sold in pairs

HW93526A

HW93526A

- Pin style column adjustment
- Heavy duty square tubing
- Large saddle securely supports load
- Ideal for fleet, agricultural, and construction maintenance
- Sold and to be used in pairs

Stock No.	Description	Capacity per Pair	Base Size	Min. Height	Max. Height	Height Intervals
HW93511	Heavy Duty Jack Stands	10 Ton	18 x 18"	30"	52"	2"
HW93512	High Reach Jack Stands	10 Ton	16 x 16"	19-½"	31-½"	2"
HW93526A	Forklift Jack Stands	25 Ton	10 x 10"	12-¼"	20"	1-½"

OMG18122C

Air Bottle Jacks

- Air motor operation for fast, easy lifts
- Uses standard shop air (110-175 PSI)
- Quick connector air Hose for easy hook up and disconnection
- Sturdy steel construction with extra forged base for added stability

Stock No.	Description	Lifting Range
OMG18122C	12 Ton Capacity	9-½" - 18-½"
OMG18202C	20 Ton Capacity	9-¾" - 18-¾"
OMG18302C	30 Ton Capacity	11" - 18-⅛"
OMG18502	50 Ton Capacity	12" - 19"

OMG27025

"Magic Lift™" Service Jack

- Revolutionary technology offers a fast lift for professional performance
- One or two pumps of the handle quickly raises saddle to the load lift point
- Heavy gauge steel fram helps prevent distortion and twisting
- Safety by-pass system protects against overload damage

Stock No.	Description	Lifting Range
OMG27025	2-½ Ton Capacity	4" - 20-¼"

- Specifically designed for heavy-duty tasks
- Steel wheels design for extra durability
- Long T-handle increases mobile efficiency
- Sold and to be used only in pairs
- Wider width for stability

Stock No.	Dimensions	Handle Length	Maximum Vehicle Tire Width
OMG93201	45-⅝ x 18-¼ x 9-¼"	33-½"	15-½"

OMG29023

Low Profile Service Jack

- Extra long low side frames designed for long reach under the car chassis
- No load first pump lifting point up to 13"
- Innovative design of Magic LiftTM offers a quicker life for professional performance
- Low profile design for maximum access, which fits easily and safely under vehicle
- Wide stance and low center of gravity provides optimum stability under load stress

Stock No.	Description	Lifting Range
OMG29023	2 Ton Capacity	2-½" - 20"

OMG32107

Note: Sold and to be used in pairs

Pin Style Jack Stands

- Jack Stands use pin to hold bar safely in place when supporting load
- Easy height adjustment
- Sturdy welded steel construction for superior safety and strength
- Heavy gauge steel frame helps prevent distortion or twisting
- Sold and to be used only in pairs

Stock No.	Description
OMG32107	10 Ton Capacity - high lift, adjusts from 28" - 47"
OMG32225	22 Ton Capacity - truck jack stands, adjusts from 12-⅛" - 19-⅞"

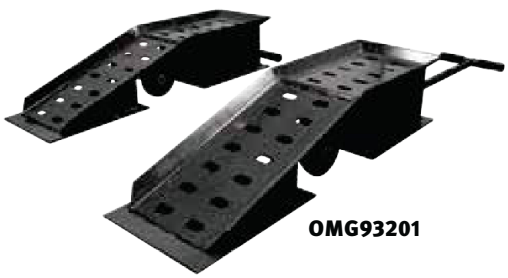

OMG93201

Note: Sold and to be used in pairs

⚠ WARNING

- Read and follow all safety messages in instructions
- Read safety precautions on pages W1 to W4

WMH414461, WMH414453* - 5" X 8" Horizontal Bandsaws

A steel heat-treated worm driving a bronze worm gear gives smooth and quiet operations of the gear box assembly. The JET oil bath drive train extends the production life of the machine parts. The blade guides adjust fully in three planes. The saw's sliding guide arm permits positioning close to the cut.

- Adjustable hydraulic feed system
- Adjustable ball bearing guides
- Heat treated steel worm gear and bronze drive gear
- Automatic shut off at end of cut
- Handle & Wheels for convenient moving to various work stations
- 115V 1PH, 1/2HP

*Includes 1 gallon capacity coolant system, 115V/lPh, complete with hose, flexible nozzle, shut-off valve, tank and baffle

WMH414461

Bandsaw Blade: Please order Easy-Cut® Part Number: 826477205084

WMH414454 - 7" x 12" Horizontal Wet Band Saw

- Blade Guides:
  Side: Eccentric shaft, ball bearing
  Rear: Ball bearings
- Blade drive is steel, heat treated worm, driving a bronze worm gear in oil bath
- Heavy duty cast iron saw head and table
- Oil bath hardened and ground worm gear
- Adjustable ball bearing blade guides
- Blade wheels are made of flanged cast iron
- Adjustable hydraulic feed system
- Automatic shut-off at end of cut
- 115V 1PH, ¾HP

*Wet cutting saw includes 1 gallon capacity coolant system, 115V/lPh, complete with hose, flexible nozzle, shut-off valve, tank and baffle

WMH414454

Bandsaw Blade: Please order Easy-Cut® Part Number: 826480207090

WMH414500K - 14" Wood/Metal Vertical Bandsaws

These saws are specially designed to effectively cut a variety of materials including wood, plastic, bakelite, composites, ferrous and non-ferrous metals. Capable of contour and straight cutting and resawing. Can cut delicate curves in both thick and thin stock.

- Cast iron frame
- Solid, one-piece steel base for extra stability
- Conveniently located on/off switch
- Exclusive gear box design allows wood/metal model saws to be used for a wider variety of metal, wood, non-ferrous metal and plastic cutting applications.
- Voltage 1HP, 115V, 1PH

WMH414500K

Bandsaw Blade: Please order Easy-Cut® Part Number: 826477207084

Please refer to page N164 for more Easy-Cut® Bandsaw Blades.

WMH577003

WMH577003 - 1" x 42" Belt/8" Sander with Miter Gauge

- Hinged idler wheel cover
- Power take off, allows for mounting an optional flex shaft, when can be used to do carving, drum sanding, deburring and dozens of other jobs
- Deluxe miter gauge that turns and locks for common angles 45° both left and right
- Abrasive belt unit does the work of a jig saw, coping saw or hand file while removing material and finishing at the same time, allows the operator to get into small openings, plus handle odd shapes and angles
- Allows for sanding, grinding or finishing of outside, curves or odd shaped work pieces on the belt
- Grind, sand or finish large work pieces on the disc unit fast and efficiently; combined with the tilting table, the operator has the advantage of chamfering or beveling, table is slotted to accept miter gauge
- Delivers sharper, faster cutting actions; easy belt changes with a variety of grits, belt keeps the machine cool, so one can complete a wide range of jobs
- When using non-woven synthetic belts the operator can blend, polish, buff or finish metal surfaces in addition to defuzzing wood surfaces
- ⅓HP, 1PH, 115V Motor and Toggle Switch

WMH577101

WMH577101 JET Industrial Bench Grinders

- UL listed
- Totally enclosed, pre-lubricated ball bearings
- Heavy-duty guarded toggle switch on 8" and 10"
- Rubber mounts prevent movement

Stock No.	Wheel Diameter (dia. x W/in.)
WMH577101	6" Bench Grinder x ¾" Wide Wheels, ½HP, 115V, 1PH
WMH577102	8" Bench Grinder, 1" Wide Wheels, 1HP, 115V, 1PH
WMH577103	10" Bench Grinder, 1" Wide Wheels, 1 1/2HP, 115V, 1PH

WMH577172

WMH577172 Pedestal Stand for Bench Grinders

- Heavy-duty cast iron construction
- Stable, wide stance base
- Fully adjustable platform coolant tank and tool tray

WMH414550K

WMH414550K Combination Belt and Disc Machine

- 6" x 48" Belt
- 10" Disc
- Two cast iron tilting tables for mitering applications
- Full access to the belt when tilted in the horizontal position
- Dust collection shrouds on belt and disc
- Quick-release tension mechanism makes belt changes quick and easy
- Removable safety key switch
- Enclosed base protects motor from sanding dust
- Floor stand included (some assembly required)

WMH354170

WMH354170 JET 20" Floor Drill Press

- Hinged metal belt and pulley cover coupled with quick adjustment motor mount allow rapid changing of spindle speeds
- Rotating, 45° tilting, crank-operated worktable with quick release clamp
- On/off switch located on front of the drill press head
- A 1/2" diameter external positive depth stop with three nut locking feature for quick adjustment
- Adjustable tension spindle return spring
- Spindle is supported by high quality ball bearings
- Built-in work lamp on all models, bulb not included.
- Drill chuck and key included
- 1" Drilling Capacity, 1-1/2 HP, 1Ph, 115/230V

⚠ WARNING

- Read and follow all safety messages in instructions
- Read safety precautions on pages W1 to W4

WILTON/JET

JET 6,000 Lb. Capacity Premium Pallet Trucks

- Premium quality 6,000 lbs. capacity pallet truck with robotic welds
- Easy-to-use with large ergonomic handle, fingertip controls and 200 degrees turning radius
- Handle returns to upright position when not in use
- Articulating axle maintains wheel contact on uneven floor surfaces
- Hydraulic pump is load tested and inspected 20 times prior to assembly
- One-piece cast pump features hardened and chromed piston and ram with high quality seals
- Pump also features step-less lowering valve, allowing you to control the rate of descent, top-of-stroke and safety overload bypass system
- Single point replacement valve makes servicing or rebuilding easy
- Solid steel lifting rods, no periodic adjustment required
- Rounded fork tips with nylon rollers for trouble-free pallet entry and exit
- Polyurethane over aluminum steer wheels with lifetime lubricated bearings
- Nylon load wheels with lifetime lubricated bearings

WMH140075

Stock No.	Item Description
WMH140170	20" x 36" Forks 6,000 lb Capacity
WMH140172	20" x 48" Forks 6,000 lb Capacity
WMH140174	27" x 42" Forks 6,000 lb Capacity
WMH140175	27" x 48" Forks 6,000 lb Capacity

JET 5,000 Lb. Capacity J Series Pallet Trucks

- High quality 5,000 lbs. capacity pallet truck with durable powder coat finish
- 2-1/2" lowered height for smaller opening pallets
- Easy-to-use with one hand operation, fingertip controls and 180 degrees turning radius
- Handle returns to upright position when not in use
- Articulating axle maintains wheel contact on uneven floor surfaces
- Welded steel pump features hardened and chromed piston and ram with high quality seals
- Pump also features top-of-stroke and safety overload bypass system
- Solid steel lifting rods, no periodic adjustment required
- Tapered fork tips with steel ramps for trouble-free pallet entry and exit
- Polyurethane over steel steer wheels with lifetime lubricated bearings
- Nylon load wheels with lifetime lubricated bearings
- Additional grease fittings provide for lubrication of pivot points

WMH151009

	Stock No.	Item Description
JET PALLET TRUCKS	WMH151003	16" x 36" Forks, 5,000 Lb Capacity
	WMH151005	20" x 42" Forks, 5,000 Lb Capacity
	WMH151006	20" x 48" Forks, 5,000 Lb Capacity
	WMH151008	27" x 42" Forks, 5,000 Lb Capacity
	WMH151009	27" x 48" Forks, 5,000 Lb Capacity

JET HD Resin Service Carts

- Heavy duty resin construction resists dents, chips, and rust
- Handle has built in storage bins
- Round corners mean no sharp edges to nick walls or furniture
- Large, quiet, non-marking 5" casters

WMH140019

Stock No.	Model No.	Max Capacity (lbs.)	Shelf Size (in)	Upper Shelf Height (in)	Height Between Shelves (in)	Lower Shelf Height (in)	Caster Size (lbs)	Overall Size (LxWxH/in)	Shipping Weight	Carton Pack
WMH140018	PUC-3117	550	31 ⅛ x 17 ⅛	33 ½	19 ½	6	5 x 1	39 ¾ x 17 ⅛ x 33 ½	40	1
WMH140019	PUC-3725	550	37 ⅜ x 25 ⅝	33 ½	19 ½	6	5 x 1	46 x 25 ⅝ x 33 ½	42	1

Build-A-Bay

A complete selection of base cabinets for complete design flexibility. Choose from single, double and triple bank configurations. All base units come standard with bottom skids for forklift access and 4" flat black kick plates. Best of all, everything, from top to bottom, is Snap-on.

Double Bank KRS1032
Width: 72.87"
Height: 40.00"
Depth: 29.09"
Case height: 37.31"

Single Bank KRS1501
Width: 35.68"
Height: 54.60"
Depth: 29.09"
Case height: 50.67"

Double Bank KRS1502
Width: 54.28"
Height: 54.60"
Depth: 29.09"
Case height: 50.67"

Single Bank KRS756
Width: 35.68"
Height: 36.82"
Depth: 24.09"
Case height: 32.89"

Double Bank Work Center KRS1022WC
Width: 54.28"
Height: 64.00"
Depth: 29.09"
Case height: 37.31"

Double Bank KRS7022
Width: 54.28"
Height: 36.82"
Depth: 29.09"
Case height: 32.89"

Triple Bank KRS1023
Width: 72.87"
Height: 40.00"
Depth: 29.09"
Case height: 37.31"

Double Bank KRS1022
Width: 54.28"
Height: 40.00"
Depth: 29.09"
Case height: 37.31"

Single Bank KRS1502W
Width: 54.28"
Height: 54.60"
Depth: 29.09"
Case height: 50.67"

Triple Bank KRS7023
Width: 72.87"
Height: 36.82"
Depth: 29.09"
Case height: 32.89"

Single Bank KRS1056
Width: 35.68"
Height: 40.00"
Depth: 29.09"
Case height: 37.31"

Double Bank KRS722
Width: 54.28"
Height: 36.82"
Depth: 24.09"
Case height: 32.89"

Colors Available

Red	Gloss Black	Royal Blue	Ultra Yellow	Arctic Silver
PBO	PC	PCM	PES	PKS

⚠ WARNING

- Read and follow all safety messages in instructions
- Read safety precautions on pages W1 to W4

MODULAR HIGH DENSITY TOOL STORAGE

Build-A-Bay

Have a special need? Snap-on has the answer. For example, our innovative Docker Locker™ allows technicians to bring their tools to the job and secure them overnight. Our under-bench cart port provides safe, easy overnight tool storage for your technicians.

18" Bulk Storage KRS1815 (not shown)
Width: 18.00"
Height: 36.82"
Depth: 24.00"
Case height: 32.89"

24" Bulk Storage KRS2415 (above)
Width: 24.00"

48" Bulk Storage w/2 Doors KRS4815 (not shown)
Width: 48.00"

72" Bulk Storage w/4 Doors KRS7215 (below)
Width: 73.50"

24" Computer Cabinet KRS2413L
Left Hand Door
Width: 24.00"
Height: 36.82"
Depth: 24.00"
Case height: 32.89"

KRS2413R (not shown)
Right Hand Door

All docker lockers include tool cart KR7088A

24" Wall Mounted Overhead KRS2416
(not shown)
Width: 24.00"
Height: 19.70"
Depth: 18.00"

36" Wall Mounted Overhead KRS3616
(not shown)
Width: 36.00"

48" Wall Mounted Overhead KRS4816
(above left)
Width: 48.00"

Docker Locker for KRS 1500 Series KRS1518
(not shown)
Width: 24.00"
Height: 54.60"
Depth: 29.09"
Case height: 50.67"

For KRS 700 and 7000 Series KRS7018
(not shown)
Width: 24.00"
Height: 57.90"
Depth: 29.09"
Case height: 57.89"

For KRS 1000 Series KRS1018 (shown left)
Width: 24.00"
Height: 63.375"
Depth: 29.09"
Case height: 62.375"

Under Bench Cart Port KRS2417 (left)
Width: 24.00"
Height: 36.82"
Depth: 29.09"
Case height: 32.89"
(Shown with KRS 2415 Bulk Storage, can also be used with 700 and 7000 series tool storage units).

In Ground Challenger Lift Controls KRS1214CC
(left)
Width: 12.00"
Height: 36.82"
Depth: 24.00"
Case height: 32.89"

In Ground Rotary Lift Controls KRS1214BR
(not shown)
Width: 12.00"
Height: 36.82"
Depth: 24.00"
Case height: 32.89"

Available in 3 colors

Red Gray Blue

Open Starter Open Add-On

V-Grip Shelving

- Shelves Adjust on 1.5" Centers - No Tools Required
- Common Uprights for Continuous Row Applications
- Closed Units Feature Reflective White Side/Back Panels
- Customize with Wire Shelves and Modular Drawers

84" Open Preconfigured Units

Depth	Width	Capacity Per Shelf	Color	Five Shelves Starter Stock No.	Add-On Stock No.	Seven Shelves Starter Stock No.	Add-On Stock No.	Extra Shelf
18"	36"	700 lbs.	Red	EQ663-5SR	EQ663-5AR	EQ663-7SR	EQ663-7AR	EQ6231R
18"	36"	700 lbs.	Gray	EQ663-5SG	EQ663-5AG	EQ663-7SG	EQ663-7AG	EQ6231G
18"	36"	700 lbs.	Blue	EQ663-5SB	EQ663-5AB	EQ663-7SB	EQ663-7AB	EQ6231B
24"	36"	721 lbs.	Red	EQ665-5SR	EQ665-5AR	EQ665-7SR	EQ665-7AR	EQ6232R
24"	36"	721 lbs.	Gray	EQ665-5SG	EQ665-5AG	EQ665-7SG	EQ665-7AG	EQ6232G
24"	36"	721 lbs.	Blue	EQ665-5SB	EQ665-5AB	EQ665-7SB	EQ665-7AB	EQ6232B

84"H Closed preconfigured unites with drawers

Closed Starter Closed Add-On

84" Closed Preconfigured Units

Depth	Width	Capacity Per Shelf	Color	Five Shelves Starter Stock No.	Add-On Stock No.	Seven Shelves Starter Stock No.	Add-On Stock No.	Extra Shelf
18"	36"	700 lbs.	Red	EQ673-5SR	EQ673-5AR	EQ673-7SR	EQ673-7AR	EQ6231R
18"	36"	700 lbs.	Gray	EQ673-5SG	EQ673-5AG	EQ673-7SG	EQ673-7AG	EQ6231G
18"	36"	700 lbs.	Blue	EQ673-5SB	EQ673-5AB	EQ673-7SB	EQ673-7AB	EQ6231B
24"	36"	721 lbs.	Red	EQ675-5SR	EQ675-5AR	EQ675-7SR	EQ675-7AR	EQ6232R
24"	36"	721 lbs.	Gray	EQ675-5SG	EQ675-5AG	EQ675-7SG	EQ675-7AG	EQ6232G
24"	36"	721 lbs.	Blue	EQ675-5SB	EQ675-5AB	EQ675-7SB	EQ675-7AB	EQ6232B

84"H Closed preconfigured unites with drawers:
Shown with optional wire shelf top.

Starter Add-on

84" Closed Preconfigured Units With Drawers

- Shown with optional wire shelf top
- Includes (2) 4-½" High and (2) 6" High Drawers
- 48 Standard drawer sizes
- 36" and 48" widths
- 18" and 24" depths
- Drawer heights from 3" to 13½"
- 200 and 400lb. Drawer capacity
- Each drawer has individual rigid mounting brackets for 100% flexibility of drawer location
- Drawers available with or without divider sets
- Drawers include handles with integral plastic-covered label holder

Drawer Depth	Drawer Width	Capacity per Drawer	Color	Starter Stock Number	Add-On Unit Stock Number
18"	36"	200 lbs.	Gray	EQ4221VNS	EQ4221VNA
18"	36"	400 lbs.	Gray	EQ4221VHS	EQ4221VHA
18"	48"	400 lbs.	Gray	EQ4241VHS	EQ4241VHA
24"	36"	200 lbs.	Gray	EQ4231VNS	EQ4231VNA
24"	36"	400 lbs.	Gray	EQ4231VHS	EQ4231VHA
24"	48"	400 lbs.	Gray	EQ4251VHS	EQ4251VHA

⚠ WARNING

- Read and follow all safety messages in instructions
- Read safety precautions on pages W1 to W4

SHOP ORGANIZATION

EQUIPTO

Preconfigured Modular Drawer Cabinet Workcenters

- 30" wide drawer cabinets
- "Quiet Ride™" drawers with 400 lb. capacity per drawer
- Choice of vivid colors to enhance work environment
- Knockouts in legs provide for safe, convenient electrical hookup
- Lower recessed shelf for convenience
- All benches are 30" deep
- Equipto offers over 140 sizes and styles of modular workcenters

Stock No.	Bench Height	Top	Bench Length	Color	Number of Drawers
EQ2576-5WR	34"	Hardwood	5'	Red	6
EQ2576-5WG	34"	Hardwood	5'	Gray	6
EQ2576-5WB	34"	Hardwood	5'	Blue	6
EQ2576-6WR	34"	Hardwood	6'	Red	6
EQ2576-6WG	34"	Hardwood	6'	Gray	6
EQ2576-6WB	34"	Hardwood	6'	Blue	6
EQ2576-8WR	34"	Hardwood	8'	Red	6
EQ2576-8WG	34"	Hardwood	8'	Gray	6
EQ2576-8WB	34"	Hardwood	8'	Blue	6
EQ2596-8WR	34"	Hardwood	8'	Red	12
EQ2596-8WG	34"	Hardwood	8'	Gray	12
EQ2596-8WB	34"	Hardwood	8'	Blue	12

All Workcenters are Available in 3 colors



Red Gray Blue

Optimize work areas by combining work and storage space into a modular drawer cabinet workcenter. With capacity up to 400 lbs per drawer, and single or double cabinet configurations, these workcenters are designed to last a lifetime.

EQ2576

Preconfigured Closed Leg Workcenters

Equipto closed leg benches combine high-efficiency bench features with the important benefits of cabinet space. Choose from more than 200 sizes and styles and a range of features to match your exact needs. Rugged structural unit designed for tough use with the flexibility for adding accessories.

- Sliding doors and 1 shelf included
- Steel top with backsplash
- All benches are 30" deep

Stock No.	Bench Height	Bench Length	Color
EQ275U4R	34"	4'	Red
EQ275U4G	34"	4'	Gray
EQ275U4B	34"	4'	Blue
EQ275U5R	34"	5'	Red
EQ275U5G	34"	5'	Gray
EQ275U5B	34"	5'	Blue
EQ275U6R	34"	6'	Red
EQ275U6G	34"	6'	Gray
EQ275U6B	34"	6'	Blue
EQ275U8R	34"	8'	Red
EQ275U8G	34"	8'	Gray
EQ275U8B	34"	8'	Blue

EQ2596

EQ275

Preconfigured Pedestal Workcenters

Equipto Pedestal Benches offer the perfect bench/cabinet combination and feature strong, rugged work surfaces, lower shelf space and lockable cabinets and drawers. Customize with accessories and over 180 combinations of height, length, depth, and top surfaces.

- Lower recessed shelf
- Door cabinets have middle shelf
- All benches are 30" deep
- All Cabinets are 34"H x 15'W

Stock No.	Bench Height	Bench Length	Color
EQ255U4R	34"	4'	Red
EQ255U4G	34"	4'	Gray
EQ255U4B	34"	4'	Blue
EQ255U5R	34"	5'	Red
EQ255U5G	34"	5'	Gray
EQ255U5B	34"	5'	Blue
EQ255U6R	34"	6'	Red
EQ255U6G	34"	6'	Gray
EQ255U6B	34"	6'	Blue
EQ255U8R	34"	8'	Red
EQ255U8G	34"	8'	Gray
EQ255U8B	34"	8'	Blue

EQ255

Snap-on Industrial offers the complete assortment of Equipto workcenters. Call your sales representative or customer service for more information

Teardown Benches

- Ideal for working on transmissions, small engines and hydraulic components
- Reinforced work surface will stand up to years of heavy use
- Top has a ¾" high retaining lip on all sides tapering to the rear center to a ½" threaded and plumbed drain
- Optional caster kit consists of 4 swivel 7½"H casters
- ½" threaded drain nipple allows for connection of hose for fluid capture

Stock No.	Description	Depth	Length	Leg Height
EQ2301DT	Steel Top	30"	48"	29"
EQ2303DT	Steel Top	30"	48"	34"
EQ2311DT	Steel Top	30"	60"	29"
EQ2313DT	Steel Top	30"	60"	34"
EQ2301DTSS	Stainless Steel Top	30"	48"	29"
EQ2303DTSS	Stainless Steel Top	30"	48"	34"
EQ2311DTSS	Stainless Steel Top	30"	60"	29"
EQ2313DTSS	Stainless Steel Top	30"	60"	34"

2303DT shown with optional fluid container, drawer kit and shelf.

2307DT Fluid Container Kit

221DT - Drawer Kit

2203 - Caster Kit

Open Leg Workcenters

- A simple, easy way to achieve efficient work space with economy and durability
- Designed to boost productivity over years of demanding service

Stock No. with Steel Top Backstop	Stock No. Without Steel Top Backstop	Dimensions D x H x L (Inches)
EQG2223U4	EQG2223D4	30 X 34 X 48
EQG2223U5	EQG2223D5	30 X 34 X 60
EQG2223U6	EQG2223D6	30 X 34 X 72
EQG2223U8	EQG2223D8	30 X 34 X 96

Pedestal Workcenters with 1 Closed Leg & 1 Drawer Pedestal

- A perfect bench / cabinet combination
- Strong, rugged work surfaces with lower shelf space and lockable cabinets
- Door cabinets include middle shelf

Stock No. with Steel Top Backstop	Dimensions D x H x L (Inches)
EQ245U4	30 X 34 X 48
EQ245U5	30 X 34 X 60
EQ245U6	30 X 34 X 72
EQ245U8	30 X 34 X 96

SHOP ORGANIZATION

EQUIPTO

Quick-View Storage Cabinets

- UV, break and scratch resistant plastic Lexan panels are mounted in both door frames for an unobstructed view of the cabinet's contents
- Each shelf has a 225 lb. weight capacity with 2" increment height adjustability
- Cabinet doors have a 3-point locking mechanism with one chrome plated handle
- Multiple cabinets can be keyed alike or individually
- Dollies are available for the 78" high cabinets to add mobility

Stock No.	Description	Color	Width	Depth	Height
EQQVC301226R	Wall Hung Quick-View Cabinet	Red	30"	12"	26"
EQQVC301226G	Wall Hung Quick-View Cabinet	Gray	30"	12"	26"
EQQVC301226B	Wall Hung Quick-View Cabinet	Blue	30"	12"	26"
EQQVC361842R	Quick-View Storage Cabinet	Red	36"	18"	42"
EQQVC361842G	Quick-View Storage Cabinet	Gray	36"	18"	42"
EQQVC361842B	Quick-View Storage Cabinet	Blue	36"	18"	42"
EQQVC361878R	Quick-View Storage Cabinet	Red	36"	18"	78"
EQQVC361878G	Quick-View Storage Cabinet	Gray	36"	18"	78"
EQQVC361878B	Quick-View Storage Cabinet	Blue	36"	18"	78"
EQQVC362478R	Quick-View Storage Cabinet	Red	36"	24"	78"
EQQVC362478G	Quick-View Storage Cabinet	Gray	36"	24"	78"
EQQVC362478B	Quick-View Storage Cabinet	Blue	36"	24"	78"
EQQVC482478R	Quick-View Storage Cabinet	Red	48"	24"	78"
EQQVC482478G	Quick-View Storage Cabinet	Gray	48"	24"	78"
EQQVC482478B	Quick-View Storage Cabinet	Blue	48"	24"	78"

Dollies for Quick-View Storage Cabinets

Fits Cabinet Size	Red	Gray	Blue
36" x 18"	EQCD1836R	EQCD1836G	EQCD1836B
36" x 24"	EQCD1836R	EQCD1836G	EQCD1836B
48" x 24"	EQCD2448R	EQCD2448G	EQCD2448B

Dolly

Standard Storage Cabinets

Stock No.	Description	Color	Width	Depth	Height
EQ1714R	Combination Cabinet	Red	36"	18"	78"
EQ1714G	Combination Cabinet	Gray	36"	18"	78"
EQ1714B	Combination Cabinet	Blue	36"	18"	78"
EQ1719R	Combination Cabinet	Red	36"	24"	78"
EQ1719G	Combination Cabinet	Gray	36"	24"	78"
EQ1719B	Combination Cabinet	Blue	36"	24"	78"
EQ1710R	5-Shelf Cabinet	Red	36"	18"	78"
EQ1710G	5-Shelf Cabinet	Gray	36"	18"	78"
EQ1710B	5-Shelf Cabinet	Blue	36"	18"	78"
EQ1715R	5-Shelf Cabinet	Red	36"	24"	78"
EQ1715G	5-Shelf Cabinet	Gray	36"	24"	78"
EQ1715B	5-Shelf Cabinet	Blue	36"	24"	78"
EQ1734R	2-Shelf Cabinet	Red	30"	13"	27"
EQ1734G	2-Shelf Cabinet	Gray	30"	13"	27"
EQ1734B	2-Shelf Cabinet	Blue	30"	13"	27"
EQ1735R	2-Shelf Cabinet	Red	36"	13"	27"
EQ1735G	2-Shelf Cabinet	Gray	36"	13"	27"
EQ1735B	2-Shelf Cabinet	Blue	36"	13"	27"

Combination Cabinet

5-Shelf Cabinet

2-Shelf Cabinet

Flammable Liquid Storage Cabinets

- Galvanized steel shelves and leveling legs
- Support up to 350 lbs
- Internal and external welded construction
- 18 guage steel reinforced double wall panel construction
- 2" raised leakproof sill
- 2" vent with fire baffle and cap
- Ground connection
- Lead-free high gloss baked on powder finish
- 3 point key lock doors
- Meet OSHA and NFPA code 30 specifications
- Self-closing models meet UFC79

Stock No.	Door Type	Capacity (Gallons)	Number of Shelves	Dimensions W x D x H (Inches)
EQFSC30M	Manual Close	30	1	43 x 18 x 44
EQFSC30S	Self-Closing	30	1	43 x 18 x 44
EQFSC45M	Manual Close	45	2	43 x 18 x 65
EQFSC45S	Self-Closing	45	2	43 x 18 x 65
EQFSC60M	Manual Close	60	2	31 x 31 x 65
EQFSC60S	Self-Closing	60	2	31 x 31 x 65
EQFSC90M	Manual Close	90	2	43 x 34 x 65
EQFSC90S	Self-Closing	90	2	43 x 34 x 65
EQFSC31XS	Extra Shelf for 31" wide units	-	-	31 x 31
EQFSC45XS	Extra Shelf for 43" wide units	-	-	43 x 18

Equipto® V-Grip Tire Racks

- Flexible and economical tire storage - adjustable for all sizes of passenger car tires and rims
- Racks assemble quickly and adjust with a minimum number of tools
- Beams adjust up or down on 1- 1/2" centers
- Brackets furnished for use back-to-back or against the wall

Stock No.	Description	Dimensions
EQ806-52MOB	2 Tier Mobile Tire Rack with Casters	18"D x 60"W x 67"H
EQ80652S	3 Tier Stationary Tire Rack Starter Section (2 ends)	15"D x 60"W x 84"H
EQ80652A	3 Tier Stationary Tire Rack Add-on Section (1 end)	15"D x 60"W x 84"H
EQ80632S	4 Tier Stationary Tire Rack Starter Section (2 ends)	15"D x 60"W x 120"H
EQ80632A	4 Tier Stationary Tire Rack Add-on Section (1 end)	15"D x 60"W x 120"H

THE BEST DEMAND THE BEST.

TOOL STORAGE 3-98

1/4" DRIVE TOOLS 102-136

3/8" DRIVE TOOLS 137-183

1/2" DRIVE TOOLS 184-212

3/4" DRIVE TOOLS 213-221

1" 1-1/2" 2-1/2" DRIVE TOOLS 222-232

WRENCHES 233-274

TORQUE 275-301

SCREWDRIVERS 302-332
Awls • Hooks • Picks • Prybars

PLIERS 333-349

PUNCHES/CHISELS/HAMMERS 350-356

GENERAL HAND TOOLS 357-429
Files • Scrapers • Spark Plugs • Threading • Extractors • Pullers • Diesel • Other

SET BUILDING 430-440

POWER TOOLS 441-506

TESTING & ELECTRONICS 510-551
Specialty Meters • Analyzers • Fuel and Engine Systems

WELDING 552-567

UNDERCAR 568-605

BATTERY SERVICE 606-615

AIR CONDITIONING 616-628

COOLING 629-636

SHOP EQUIPMENT 637-720
Lighting • Creepers • Measuring • Pick-up Tools • Compressors • Presses

SHOP CLEANING 721-727
Parts Washers • Pressure Washers • Vacuums • Shop Fans

SAFETY 728-740

DIAGNOSTICS 741-775

INDEX I1-I30

QUICK REFERENCE

THE WORLD'S FINEST TOOLS. 95 YEARS IN THE MAKING.

1920s

PIONEERED INTERCHANGEABLE SOCKETS ("5 DO THE WORK OF 50") AND DIRECT-TO-CUSTOMER SALES; RATCHETING ATTACHMENT DEBUTS

1940s

SNAP-ON INTRODUCES A COMPLETE YET COMPACT WHEEL ALIGNMENT SYSTEM TO MEASURE CAMBER, CASTER AND STEERING GEOMETRY

1960s

INNOVATIVE FLANK DRIVE® WRENCHING SYSTEM IS INTRODUCED TO THE ENTIRE PRODUCT LINE; UNDERSCORES "THERE IS A DIFFERENCE" IN SNAP-ON PRODUCTS

1930s

TORQOMETER® (PIONEERING TORQUE WRENCH) & SUPER SERVICE SETS (WITH 150+ TOOLS) INTRODUCED

1950s

THE MASTER ANALYZER, A COMPREHENSIVE IGNITION AND ENGINE TESTING SYSTEM IN ONE CONSOLE, IS UNVEILED

In 1920, with the turn of a socket wrench, Joe Johnson revolutionized the tool industry. His ingenious "5 Do the Work of 50" interchangeable sockets and handles set a new standard – and Snap-on has been innovating ever since. From a rented building in Milwaukee, Johnson and his colleague Bill Seidemann agreed: interchangeable sockets had the potential for unrivaled productivity. And so, Snap-on Wrench Company was born. They teamed with Stanton Palmer and Newton Tarble, the pioneers of direct sales and delivery of tools to mechanics at their place of business. Today, Snap-on is poised to spearhead innovation well into the 21st century. And, with roots still firmly planted here at home, we'll continue to define the cutting edge: by creating unique productivity solutions for techs and professionals in critical industries around the globe.

1980s

SNAP-ON DEVELOPS COLD-FORMED ALLOY STEEL TECHNOLOGY FOR SOCKETS; HANDHELD DIAGNOSTIC TOOL MT2500, "THE BRICK," IS LAUNCHED

2000s

DUAL 80™ RATCHETING TECHNOLOGY INTRODUCED; EPIQ, A POWERED TOOL STORAGE SYSTEM, IS CREATED

1970s

SNAP-ON PIONEERS AIR-POWERED RATCHETS WITH INTRODUCTION OF THE PATENTED FAR70

1990s

FLANKDRIVE® PLUS (WITH 40% GREATER TURNING POWER) INTRODUCED; SNAP-ON PATENTS A 3D VISUAL ALIGNMENT SYSTEM

2010s

SURETRACK® – EXPERT INFORMATION SYSTEM WITH REAL FIXES AND VERIFIED PARTS REPLACEMENT RECORDS FROM MILLIONS OF SUCCESSFUL REPAIR ORDERS

OUR THANKS TO THOSE WHO CONTINUE TO PUT SNAP-ON ON THE MAP.

Behind every great tool is an incredible workforce. At Snap-on, we proudly salute the men and women who design, engineer, and manufacture the best tools in the world.

ELIZABETHTON, TN
Wrenches, Ratchets, Prybars, Punches, and Chisels

MURPHY, NC
Cordless and Pneumatic Tools

MILWAUKEE, WI
Sockets, Extensions, Pliers, and Screwdrivers

CONWAY, AR
Wheel Balancers and Tire Changers

ALGONA, IA
Tool Storage

CITY OF INDUSTRY, CA
Torque Products

ELKMONT, AL
Ratcheting Screwdrivers, Hammers, Large Sockets, and Custom Tools

SAN JOSE, CA
Diagnostic Platforms and Software

Overview.....4
EPIQ Series.....7
Masters Series.....21
Classic Series.....41
Heritage Series.....49
Mobile Solutions.....56
Accessories.....67

TOOL STORAGE

WHEN IT COMES TO STORING TOOLS, SNAP-ON RULES.

For every job, for every need, for every tech, Snap-on has the storage solution. With an incredible breadth and depth of tool storage systems, the ability to personalize and customize a system that suits you, innovative expansion options and rock-solid construction, Snap-on leads the way. When you want a system that puts every tool perfectly in its place, we have your perfect solution.

COUNTLESS WAYS TO CUSTOMIZE.

The needs of every job – and every tech – are different. Snap-on® tool storage systems give you the power to customize one to your exact requirements.

BREADTH — From the groundbreaking EPIQ Series to the Masters, Classic and Heritage Series, to carts and specialty storage, you'll find your solution here.

SYSTEM EXPANSION — As your career and capabilities grow, so will your tool storage system. We've got the options to keep pace.

PACKED WITH INNOVATION.

Innovation starts with listening. And when you told us what you needed, we designed industry-leading features that work with you and for you.

POWERED TOOL STORAGE — Charge your tools while securely storing them in the revolutionary EPIQ Series with PowerBank™.

MOBILE STORAGE — From roll cabs to carts to the one-of-a-kind Road Chest, *Snap-on* tool storage is always right beside you.

INPULSE™ DRAWERS — Intuitive flush finish drawers that are easier to open, smoother to close and don't drift open.

"Since I bought my big box, I haven't heard anyone come in and tell me they know of someone with a bigger one. The quality and tool control adds value daily."

Kevin Kassel
Des Moines, IA

Kevin has:
2 Red TUVs - KRT1032BPBO
1 Red Roll Cab w/ Stainless Steel Top - KRL1022CPBO1
1 Red Riser, Workstation 54" - KRL1054PBO

FIRST IN STORAGE. BUILT TO LAST.

Because you work hard, *Snap-on* tool storage is tested to its limits. Which means these tough, reliable systems will go the distance. Depend on it.

STRUCTURAL CONTINUITY — A structural, integrated bond makes the overall strength of the unit greater than the sum of its parts.

DOUBLE WALL CONSTRUCTION — Double up on durability: the double wall guards against faulty drawer operation caused by dents and dings.

HIGH-END PAINT — An ultra-tough powder coat process provides impressive finishes in a variety of colors.

ROLL CAB – QUICK REFERENCE CHART

EPIQ Series

Masters Series

Classic Series

Heritage Series

	Features	EPIQ	Masters	Classic	Heritage
Steel Gauge:	Bottom	16 (14 Gauge Super Duty Skid Support System)	16 (14 Gauge Extra Heavy Duty Skid Support System)	16 (14 Gauge Heavy Duty Skid Support System)	16 (14 Gauge Heavy Duty Skid Support System on 53" Roll Cabs)
	Top	16 (Super Duty Stiffeners)	16 (Extra HD Stiffeners)	16 (Heavy Duty Stiffeners)	16 (Medium Duty Stiffeners on 53")
	Back	16	16	16	18
	Side	16	16	16	18
	False Side Panels	18	18	18	20
	Drawer Front	18	18	18	20
	Drawer Body	18	18	18	18/20
	Drawer Back	18	18	18	20
	Standing Seam	•	•	•	—
	Corner Gussets	4	4	4	4 (53"); 2 (40")
Features:	Slides, lb (ball bearing)	227	227	120	120
	Handle	Chrome with grips	Chrome with insert	Ergonomic	Ergonomic
	Drawer Trim	Dual-function Aluminum	Aluminum Installed	Aluminum Installed	Aluminum Installed
	Case Trim	Alum. Wrap Installed	Aluminum Installed	—	—
	Lock	Removeable Core	Removeable Core	Removeable Core	Removeable Core
	Casters	7" x 2" Super Duty ISO-Ride® 8,000 lb	6" x 2" Extra Heavy *ISO-Ride* 6,800 lb*	6" x 2" 2,400 lb	6" x 2" 2,400 lb
	Caster/Handle Mounting	Weld Nut/ Heavy Plate	Weld Nut/ Heavy Plate	Weld Nut/ Heavy Plate	Weld Nut & Plate
	Top Mat	Non-directional Rubber	Non-directional Rubber	Non-directional Rubber	Unidirectional Rubber
	Drawer Liner	Nonslip Premium	Nonslip Premium	Nonslip Premium	Foam
	Drawer Retention	InPulse	Lock-n-Roll	Lock-n-Roll	Lock-n-Roll
	Paint	All Powder Coat Scratch Resistant	All Powder Coat Scratch Resistant	All Powder Coat Scratch Resistant	All Powder Coat Scratch Resistant
	Colors Available	12 Standard	12 Standard	8 Standard	4 Standard
	Integrated Power Available	•	Optional Cabinet	—	—

*6,800 lb casters on all Masters except KRL722A, KRL756B, KRL1056B

TOOL STORAGE. TAKEN TO THE NEXT LEVEL.

Created by technicians to meet the most rigorous demands of any job, the EPIQ Series is the first Snap-on® tool storage series with integrated power. This is what happens when Snap-on – and the pros that use them – takes legendary tool storage to the next level.

PowerBank™ — Charge and store your cordless tools in this lockable bank.

PowerHouse™ — Power and store a diagnostic tool or PC under the lockable flip-top.

PowerTop™ — A stainless steel work surface with integrated power sources accommodates laptops, power tools and a variety of accessories.

TOP-OF-THE-LINE. FROM TOP-TO-BOTTOM.

When it comes to these tool storage units, EPIQ power is just the beginning. Because to top things off, this series is built with the best components – many of which are EPIQ exclusives. The EPIQ Series: Snap-on at the top of its game.

InPulse™ Drawers — Intuitive flush-finished drawers for the ultimate in performance and professional look.

ISO-Ride® Casters — Smooth-riding 7" swivel-lock mag wheels with independent suspension.

Standing Seams — Increases the weight-bearing strength while protecting edges from unnecessary bumps and bruises.

Corner Gussets — Reinforcement in the corners to prevent racking – even under the heaviest loads.

Structural Support — Stiffeners, gussets and reinforcements used in strategic places throughout the drawers and roll cab.

EPIQ SERIES

This roll cab is not just monumental. It's EPIQ.

Only one name is worthy of our top-of-the-line roll cab series: EPIQ. This is the ultimate choice in tool storage – designed and created by techs, for techs. EPIQ unites the most rugged, reliable and functional roll cabs in the industry, letting you customize one that's tailor-made for the way you work. Choose your additions, optimize your tool storage, ramp up your productivity. Now that's EPIQ.

KERP843B4PUN

EPIQ SERIES

Red	Gloss Black	Royal Blue	Midnight Blue	Ultra Yellow	Candy Apple Red	Extreme Green	Electric Orange	Arctic Silver	Flat Black Blk Trim	White	Flat Blue Blk Trim
PBO	PC	PCM	PDG	PES	PJH	PJJ	PJK	PKS	POT	PU	PWL

TRIM COLORS

Blue	Red	Titanium	Black	Bright Chrome

TOP DRAWER SECTION

As your tool collection grows, a Top Drawer Section provides you with the extra storage space you need. It maximizes both drawer space and organization by providing 75% of the storage space of a roll cab. Each drawer bank features three 4" drawers.

OVERHEAD CABINET

It's a simple equation: adding an overhead storage cabinet equals more wide-open shelf and cabinet space. This bulk space is perfect for plastic cases, manuals and personal items. Actuated gas springs raise the door for convenient access.

BULK END CAB

EPIQ bulk end cab provides storage for larger items and additional usable work space; features 17,260 cubic inches of storage, 3 pull-out shelves, and 1 stationary shelf.

WORKCENTER

The WorkCenter serves as the perfect hub when you need to jot down notes, work off your laptop, monitor diagnostic equipment and charge cordless power tools. It also offers a great way to organize the back wall for tool holders, shelves and lighting. Two gas cylinders assist in opening the door for effortless operation.

LOCKER

Our 30"-deep EPIQ lockers are perfect for larger tools, with configurations available in both left and right side doors. It is equipped with six 4"-deep drawers and a stationary shelf; includes two swivel casters for support and easy maneuverability.

*Note stainless steel or bed liner top required when adding a WorkCenter.

EPIQ SERIES: QUICK REFERENCE CHART

KEXP725A

KEXN725A

KEXN603A

KERP842B

KERN842B

KERP843B

Roll Cabs	Specifications	KEXP725A	KEXN725A	KEXN603A	KERP842B	KERN842B	KERP843B
Capacity	Approx Cubic Inches (cm^3)	91,690 (1,501,882)	91,627 (1,500,850)	77,672 (1,272,267)	55,670 (912,268)	55,550 (910,301)	53,407 (875,184)
	Approx Square Inches (cm^2)	25,319 (163,308)	25,340 (163,443)	22,690 (146,351)	13,541 (87,361)	13,769 (88,832)	13,876 (89,522)
	Load Capacity, lb (kg)	16,000 (7,258)	16,000 (7,258)	16,000 (7,258)	8,000 (3,629)	8,000 (3,629)	8,000 (3,629)
Footprint	Width, inches (mm)	144 (3,658)	144 (3658)	120 (3,048)	84 (2,134)	84 (2,134)	84 (2,134)
	Depth, inches (mm)	30 (762)	30 (762)	30 (762)	30 (762)	30 (762)	30 (762)
	Height, inches (mm)	46 7/8 (1,191)	46 7/8 (1,191)	46 7/8 (1,191)	46 7/8 (1,191)	46 7/8 (1,191)	46 7/8 (1,191)
Drawers	Drawer Banks	5	5	3	2	2	3
	Drawer Count	26	31	20	8	13	14
	Widest Drawer, inches (mm) [Qty]	62" (1,575) [3]	54" (1,372) [6]	54" (1,372) [11]	62 (1,575) [7]	54 (1,372) [7]	62 (1,575) [2]
	Slides, lb (kg) [ball bearing]	227	227	227	227 (103)	227 (103)	227 (103)
	Double Slide (included)	Yes (7)	Yes (7)	Yes (8)	Yes (5)	Yes (6)	Yes (3)
Extras	Writing Surface (Qty)	Yes (1)	Yes (1)	Yes (1)	Yes (1)	Yes (1)	Yes (1)
	Third Caster Set Option	N/A	N/A	N/A	Yes	Yes	Yes
Weight	Net Weight, lb (kg)	—	—	—	990 (449)	1,044 (474)	990 (449)
	Shipping Weight, lb (kg)	1,925 (873)	1,925 (873)	1,970 (802)	990 (449)	1,044 (474)	990 (449)
EPIQ Configurations	PowerBank™ unit	Yes	No	No	Yes	No	Yes
	Non-directional Rubber Top	KEXP725A0	KEXN725A0	KEXN603A0	KERP842B0	KERN842B0	KERP843B0
	Stainless-Steel PowerTop™	Choose combination of 60" and 84" tops. See p.72 for part numbers.		Choose combination of 60" tops. See p.72 for part numbers.	KERP842B4	KERN842B4	KERP843B4
	Stainless-Steel PowerHouse™ Top				KERP842B5	KERN842B5	KERP843B5
Optional Add-ons Available	Top Chest	—	—	—	KECN842A	KECN842A	KECN843A
	Top Drawer Section	KESN843A KESN602A	KESN843A KESN602A	KESN602A	KESN842A	KESN842A	KESN843A
	Bulk Side Cabinet	KEBN302AL KEBN302AR	KEBN302AL KEBN302AR	KEBN302AL KEBN302AR	KEBN301AL KEBN301AR	KEBN301AL KEBN301AR	KEBN301AL KEBN301AR
	Locker	KELN301BL KELN301BR	KELN302BL KELN302BR	KELN302BL KELN302BR	KELN301BL KELN301BR	KELN301BL KELN301BR	KELN301BL KELN301BR
	WorkCenter	KEWN840B KEWN600B	KEWN840B KEWN600B	KEWN600B	KEWN840B	KEWN840B	KEWN840B
	Overhead	KEWN840B KEWN600B	KEWN840B KEWN600B	KEWN600B	KEWN840B	KEWN840B	KEWN840B
	Stainless-Steel *PowerTop*	KWSN3012AST	KWSN3012AST	KWSN3010AST	KWSP3084BST	KWSP3084BST	KWSP3084BST
	Stainless-Steel *PowerHouse* Top	—	—	—	KWSH3084BST	KWSH3084BST	KWSH3084BST
	Stainless-Steel Work Surfaces	—	—	—	KWSN3084BST	KWSN3084BST	KWSN3084BST
	Bedliner Steel Work Surface	—	—	—	KWSN3084ABL	KWSN3084ABL	KWSN3084ABL
	Bedliner *PowerTop*	—	—	—	KWSP3084ABL	KWSP3084ABL	KWSP3084ABL
	Hardwood Top	KWSN3012AWT	KWSN3012AWT	KWSN3010AWT	KWSN3084AWT	KWSN3084AWT	KWSN3084AWT

Colors Available

Red	Gloss Black	Royal Blue	Midnight Blue	Ultra Yellow	Candy Apple Red	Extreme Green	Electric Orange	Arctic Silver	Flat Black Blk Trim	White	Flat Blue Blk Trim
PBO	PC	PCM	PDG	PES	PJH	PJJ	PJK	PKS	POT	PU	PWL

Tools shown in tool storage not included. Images may be shown without actual warning labels.

All EPIQ Series units are available in 12 standard colors. **Add suffix to base stock number for special colors.**

EPIQ SERIES: QUICK REFERENCE CHART

KERN843B

KERP762B

KERP763B

KERN682B

KERN602B

KERN843B	KERP762B	KERP763B	KERN682B	KETN682A	KERN602B	KETN602A
53,316 (873,693)	49,719 (814,748)	47,485 (778,140)	43,922 (719,753)	45,147 (739,831)	38,000 (622,708)	39,119 (641,045)
13,898 (89,664)	11,985 (77,322)	12,114 (78,155)	12,412 (80,077)	11,046 (71,264)	10,650 (68,710)	9,490 (61,225)
8,000 (3,629)	8,000 (3,629)	8,000 (3,629)	8,000 (3,629)	8,000 (3,629)	8,000 (3,629)	8,000 (3,629)
84 (2,134)	76 (1,930)	76 (1,930)	68 (1,727)	68 (1,727)	60 (1,524)	60 (1,524)
30 (762)	30 (762)	30 (762)	30 (762)	30 (762)	30 (762)	30 (762)
46 7/8 (1,191)	46 7/8 (1,191)	46 7/8 (1,191)	46 7/8 (1,191)	46 7/8 (1,191)	46 7/8 (1,191)	46 7/8 (1,191)
3	2	3	2	2	2	2
19	8	14	13	10	13	10
54 (1,372) [2]	54 (1,372) [7]	54 (1,372) [2]	62 (1,575) [2]	62" (1,575) [3]	54 (1,372) [2]	54 (3)
227 (103)	227 (103)	227 (103)	227 (103)	227 (103)	227 (103)	227 (103)
Yes (4)	Yes (5)	Yes (3)	Yes (3)	Yes (4)	Yes (3)	Yes (4)
Yes (1)	Yes (1)	Yes (1)	Yes (1)	Yes (1)	Yes (1)	Yes (1)
Yes	Yes	Yes	No	No	No	No
1,044 (474)	936 (425)	936 (425)	832 (377)	832 (377)	774 (351)	880 (399)
1,044 (474)	936 (425)	936 (425)	946 (429)	912 (413)	880 (399)	774 (351)
No	Yes	Yes	No	No	No	No
KERN843B0	KERP762B0	KERP763B0	KERN682B0	KETN682A0	KERN602B0	KETN602A0
KERN843B4	KERP762B4	KERP763B4	KERN682B4	KETN682A4	KERN602B4	KETN602A4
KERN843B5	KERP762B5	KERP763B5	—	—	—	—
KECN843A	—	—	KECN682A	KECN682A	KECN602A	KECN602A
KESN843A	—	—	KESN682A	KESN682A	KESN602A	KESN602A
KEBN301AL KEBN301AR	KEBN301AL KEBN301AR	KEBN301AL KEBN301AR	KEBN301AL KEBN301AR	KEBN301AL KEBN301AR	KEBN301AL KEBN301AR	KEBN301AL KEBN301AR
KELN301BL KELN301BR	KELN301BL KELN301BR	KELN301BL KELN301BR	KELN301BL KELN301BR	KELN301BL KELN301BR	KELN301BL KELN301BR	KELN301BL KELN301BR
KEWN840B	KEWN760B	KEWN760B	KEWN680B	KEWN680B	KEWN600B	KEWN600B
KEHN840B	KEHN760B	KEHN760B	KEHN680B	KEHN680B	KEHN600B	KEHN600B
KWSP3084BST	KWSP3076BST	KWSP3076BST	KWSP3068BST	KWSP3068BST	KWSP3060BST	KWSP3060BST
KWSH3084BST	KWSH3076BST	KWSH3076BST	—	—	—	—
KWSN3084BST	KWSN3076BST	KWSN3076BST	KWSN3068BST	KWSN3068BST	KWSN3060BST	KWSN3060BST
KWSN3084ABL	KWSN3076ABL	KWSN3076ABL	KWSN3068ABL	KWSN3068ABL	KWSN3060ABL	KWSN3060ABL
KWSP3084ABL	KWSP3076ABL	KWSP3076ABL	KWSP3068ABL	KWSP3068ABL	KWSP3060ABL	KWSP3060ABL
KWSN3084AWT	KWSN3076AWT	KWSN3076AWT	KWSN3068AWT	KWSN3068AWT	KWSN3060AWT	KWSN3060AWT

Tools shown in tool storage not included

⚠WARNING

- Do not open multiple drawers
- Images may be shown without actual warning labels
- Read safety precautions on pages W1 to W4

EPIQ SERIES: ROLL CABS

KEXN725A1PES

KEXN603A0PJJ

KEXP725A0PJK

EPIQ Series Roll Cab Drawer Sizes

Width		Depth		Height		KEXN725A	KEXN603A	KEXP725A
inches	mm	inches	mm	inches	mm	Drawers	Drawers	Drawers
11 5/8	295	26 13/16	681	30 1/2	775	—	—	1
19 5/8	498	26 7/8	683	1 11/16	43	8	3	6
19 5/8	498	27 15/16	710	3 15/16	100	3	—	1
19 5/8	498	27 15/16	710	6 3/16	157	2	—	1
19 5/8	498	27 15/16	710	10 5/8	270	2	1	1
30 1/16	764	26 7/8	683	1 11/16	43	6	3	3
30 1/16	764	27 15/16	710	3 15/16	100	2	1	1
30 1/16	764	27 15/16	710	6 3/16	157	2	1	1
38 1/16	967	26 7/8	683	1 11/16	43	—	—	3
38 1/16	967	27 15/16	710	3 15/16	100	—	—	1
38 1/16	967	27 15/16	710	6 3/16	157	—	—	1
54 1/16	1,373	26 7/8	683	1 11/16	43	—	3	—
54 1/16	1,373	27 15/16	710	2 11/16	68	2	2	1
54 1/16	1,373	27 15/16	710	3 13/16	97	2	3	1
54 1/16	1,373	27 15/16	710	4 7/8	124	2	2	1
54 1/16	1,373	27 15/16	710	6	152	—	1	—
62 1/16	1,576	27 15/16	710	2 11/16	68	—	—	1
62 1/16	1,576	27 15/16	710	3 13/16	97	—	—	1
62 1/16	1,576	27 15/16	710	4 7/8	124	—	—	1
					Total Drawer Count	31	20	26

Tools shown in tool storage not included

Colors Available

Red	Gloss Black	Royal Blue	Midnight Blue	Ultra Yellow	Candy Apple Red	Extreme Green	Electric Orange	Arctic Silver	Flat Black Blk Trim	White	Flat Blue Blk Trim
PBO	PC	PCM	PDG	PES	PJH	PJJ	PJK	PKS	POT	PU	PWL

All EPIQ Series units are available in 12 standard colors. **Add suffix to base stock number for special colors.**

KERP763B4PCM
76" EPIQ with PowerBank™ Unit and PowerTop™

KERP763B0PDG
76" EPIQ with *PowerBank* Unit

KERP843B5PJK
84" EPIQ with *PowerBank* Unit and PowerHouse™ Top

KERP843B0PJH
84" EPIQ with *PowerBank* Unit

KERP763B5PES
76" EPIQ with *PowerBank* Unit and *PowerHouse* Top

KERP843B4PKS
84" EPIQ with *PowerBank* Unit and *PowerTop* Unit

EPIQ Series Roll Cab Drawer Sizes

Width		Depth		Height		KERP763B	KERP843B
inches	mm	inches	mm	inches	mm	Drawers	Drawers
11 5/8	295	26 13/16	681	30 1/2	775	1	1
19 5/8	498	26 7/8	683	1 11/16	43	3	3
19 5/8	498	27 15/16	710	3 15/16	100	1	1
19 5/8	498	27 15/16	710	10 5/8	270	1	1
30 1/16	764	26 7/8	683	1 11/16	43	3	—
30 1/16	764	27 15/16	710	3 15/16	100	2	—
30 1/16	764	27 15/16	710	6 3/16	157	1	—
38 1/16	967	26 7/8	683	1 11/16	43	—	3
38 1/16	967	27 15/16	710	3 15/16	100	—	2
38 1/16	967	27 15/16	710	6 3/16	157	—	1
54 1/16	1,373	27 15/16	710	2 11/16	68	1	—
54 1/16	1,373	27 15/16	710	4 7/8	124	1	—
62 1/16	1,576	27 15/16	710	2 11/16	68	—	1
62 1/16	1,576	27 15/16	710	4 7/8	124	—	1
					Total Drawer Count	14	14

Tools shown in tool storage not included

⚠WARNING

- Do not open multiple drawers
- Images may be shown without actual warning labels
- Read safety precautions on pages W1 to W4

EPIQ SERIES: ROLL CABS

KERP762B5PU
76" EPIQ with *PowerBank* Unit and PowerHouse™ Top

KERP762B4PBO
76" EPIQ with PowerBank™ Unit and PowerTop™

KERP762B0PC
76" EPIQ with *PowerBank* Unit

KERP842B4PDG
84" EPIQ with *PowerBank* Unit and *PowerTop*

KERP842B5PJK
84" EPIQ with *PowerBank* Unit and *PowerHouse* Top

KERP842B0PJJ
84" EPIQ with *PowerBank* Unit

EPIQ Series Roll Cab Drawer Sizes

Width		Depth		Height		KERP762B	KERP842B
inches	mm	inches	mm	inches	mm	Drawers	Drawers
11 5/8	295	26 13/16	681	30 1/2	775	1	1
54 1/16	1,373	26 7/8	683	1 11/16	43	1	—
54 1/16	1,373	27 15/16	710	2 11/16	68	1	—
54 1/16	1,373	27 15/16	710	3 13/16	97	3	—
54 1/16	1,373	27 15/16	710	4 7/8	124	1	—
54 1/16	1,373	27 15/16	710	6	152	1	—
62 1/16	1,576	26 7/8	683	1 11/16	43	—	1
62 1/16	1,576	27 15/16	710	2 11/16	68	—	1
62 1/16	1,576	27 15/16	710	3 13/16	97	—	3
62 1/16	1,576	27 15/16	710	4 7/8	124	—	1
62 1/16	1,576	27 15/16	710	6	152	—	1
					Total Drawer Count	8	8

Tools shown in tool storage not included

Colors Available

Red	Gloss Black	Royal Blue	Midnight Blue	Ultra Yellow	Candy Apple Red	Extreme Green	Electric Orange	Arctic Silver	Flat Black Blk Trim	White	Flat Blue Blk Trim
PBO	PC	PCM	PDG	PES	PJH	PJJ	PJK	PKS	POT	PU	PWL

All EPIQ Series units are available in 12 standard colors.
Add suffix to base stock number for special colors.

KERN842B4PC
84" EPIQ with PowerTop™

KERN842B0PES
84" EPIQ

KERN843B5PCM
84" EPIQ with *PowerHouse* Top

KERN843B0PKS
84" EPIQ

KERN842B5PBO
84" EPIQ with PowerHouse™ Top

KERN843B4PC
84" EPIQ with *PowerTop*

EPIQ Series Roll Cab Drawer Sizes

Width		Depth		Height		KERN842B	KERN843B
inches	mm	inches	mm	inches	mm	Drawers	Drawers
19 5/8	498	26 7/8	683	1 11/16	43	2	5
19 5/8	498	27 15/16	710	3 15/16	100	2	3
19 5/8	498	27 15/16	710	6 3/16	157	1	1
19 5/8	498	27 15/16	710	10 5/8	270	1	2
30 1/16	764	26 7/8	683	1 11/16	43	—	3
30 1/16	764	27 15/16	710	3 15/16	100	—	2
30 1/16	764	27 15/16	710	6 3/16	157	—	1
54 1/16	1,373	26 7/8	683	1 11/16	43	1	—
54 1/16	1,373	27 15/16	710	2 11/16	68	1	1
54 1/16	1,373	27 15/16	710	3 13/16	97	3	—
54 1/16	1,373	27 15/16	710	4 7/8	124	1	1
54 1/16	1,373	27 15/16	710	6	152	1	—
					Total Drawer Count	13	19

Tools shown in tool storage not included

⚠WARNING

- Do not open multiple drawers
- Images may be shown without actual warning labels
- Read safety precautions on pages W1 to W4

EPIQ SERIES: ROLL CABS

KERN602B4PBO
60" EPIQ with PowerTop™

KERN602B0PJJ
60" EPIQ

KERN682B0PU
68" EPIQ

KERN682B4PCM
68" EPIQ with *PowerTop*

EPIQ Series Roll Cab Drawer Sizes

Width		Depth		Height		KERN602B	KERN682B
inches	mm	inches	mm	inches	mm	Drawers	Drawers
19 5/8	498	26 7/8	683	1 11/16	43	3	3
19 5/8	498	27 15/16	710	3 15/16	100	1	1
19 5/8	498	27 15/16	710	10 5/8	270	1	1
30 1/16	764	26 7/8	683	1 11/16	43	3	—
30 1/16	764	27 15/16	710	3 15/16	100	2	—
30 1/16	764	27 15/16	710	6 3/16	157	1	—
38 1/16	967	26 7/8	683	1 11/16	43	—	3
38 1/16	967	27 15/16	710	3 15/16	100	—	2
38 1/16	967	27 15/16	710	6 3/16	157	—	1
54 1/16	1,373	27 15/16	710	2 11/16	68	1	—
54 1/16	1,373	27 15/16	710	4 7/8	124	1	—
62 1/16	1,576	27 15/16	710	2 11/16	68	—	1
62 1/16	1,576	27 15/16	710	4 7/8	124	—	1
					Total Drawer Count	13	13

Images shown with optional *PowerTop*

Colors Available

Red	Gloss Black	Royal Blue	Midnight Blue	Ultra Yellow	Candy Apple Red	Extreme Green	Electric Orange	Arctic Silver	Flat Black Blk Trim	White	Flat Blue Blk Trim
PBO	**PC**	**PCM**	**PDG**	**PES**	**PJH**	**PJJ**	**PJK**	**PKS**	**POT**	**PU**	**PWL**

All EPIQ Series units are available in 12 standard colors.
Add suffix to base stock number for special colors.

KETN682A0PBO
68" EPIQ

KETN602A0PBO

EPIQ Series Roll Cab Drawer Sizes

Width		Depth		Height		KETN602A	KETN682A
inches	mm	inches	mm	inches	mm	Drawers	Drawers
19 5/8	498	26 7/8	683	1 11/16	43	1	1
19 5/8	498	27 15/16	710	3 15/16	100	1	1
19 5/8	498	27 15/16	710	10 5/8	270	1	1
30 1/16	764	26 7/8	683	1 11/16	43	1	—
30 1/16	764	27 15/16	710	3 15/16	100	2	—
30 1/16	764	27 15/16	710	6 3/16	157	1	—
38 1/16	967	26 7/8	683	1 11/16	43	—	1
38 1/16	967	27 15/16	710	3 15/16	100	—	2
38 1/16	967	27 15/16	710	6 3/16	157	—	1
54 1/16	1,373	27 15/16	710	2 11/16	68	1	—
54 1/16	1,373	27 15/16	710	3 13/16	97	1	—
54 1/16	1,373	27 15/16	710	4 7/8	124	1	—
62 1/16	1,576	27 15/16	710	2 11/16	68	—	1
62 1/16	1,576	27 15/16	710	3 13/16	97	—	1
62 1/16	1,576	27 15/16	710	4 7/8	124	—	1
					Total Drawer Count	10	10

⚠WARNING

- Do not open multiple drawers
- Images may be shown without actual warning labels
- Read safety precautions on pages W1 to W4

EPIQ SERIES: TOP CHESTS

KECN602A0PBO

KECN602A0 Series Top Chest

Cubic Inches (cm^3)	Square Inches (cm^2)	Net Weight, lb (kg)	Shipping Weight, lb (kg)
28,330 (464,245)	8,400 (54,193)	525 (238)	605 (274)

	Drawers	Width, inches (mm)	Depth, inches (mm)	Height, inches (mm)
Specifications	10	60 (1,524)	30 (762)	27 1/2 (699)
Drawers	2	19 5/8 (498)	26 7/8 (683)	1 11/16 (43)
	3	19 5/8 (498)	27 15/16 (710)	3 15/16 (100)
	2	30 1/16 (764)	26 7/8 (683)	1 11/16 (43)
	3	30 1/16 (764)	27 15/16 (710)	3 15/16 (100)
Top Compartment	1	54 (1,372)	27 15/16 (710)	4 7/8 (124)

KECN682A0PC

KECN682A0 Series Top Chest

Cubic Inches (cm^3)	Square Inches (cm^2)	Net Weight, lb (kg)	Shipping Weight, lb (kg)
32,741 (536,528)	9,721 (62,716)	600 (272)	685 (311)

	Drawers	Width, inches (mm)	Depth, inches (mm)	Height, inches (mm)
Specifications	10	68 (1,727)	30 (762)	27 1/2 (699)
Drawers	2	19 5/8 (498)	26 7/8 (683)	1 11/16 (43)
	3	19 5/8 (498)	27 15/16 (710)	3 15/16 (100)
	2	38 1/16 (967)	26 7/8 (683)	1 11/16 (43)
	3	38 1/16 (967)	27 15/16 (710)	3 15/16 (100)
Top Compartment	1	62 (1,575)	27 15/16 (710)	4 7/8 (124)

KECN842A0PU

KECN842A0 Series Top Chest

Cubic Inches (cm^3)	Square Inches (cm^2)	Net Weight, lb (kg)	Shipping Weight, lb (kg)
40,996 (671,804)	12,362 (79,754)	750 (340)	850 (386)

	Drawers	Width, inches (mm)	Depth, inches (mm)	Height, inches (mm)
Specifications	10	84 (2,134)	30 (762)	27 1/2 (699)
Drawers	2	54 1/16 (1,373)	26 7/8 (683)	1 11/16 (43)
	3	54 1/16 (1,373)	27 15/16 (710)	3 15/16 (100)
	2	19 5/8 (498)	26 7/8 (683)	1 11/16 (43)
	3	19 5/8 (498)	27 15/16 (710)	3 15/16 (100)
Top Compartment	1	80 (2,032)	27 15/16 (710)	4 7/8 (124)

KECN843A0PDG

KECN843A0 Series Top Chest

Cubic Inches (cm^3)	Square Inches (cm^2)	Net Weight, lb (kg)	Shipping Weight, lb (kg)
39,722 (650,926)	11,760 (75,870)	750 (340)	850 (386)

	Drawers	Width, inches (mm)	Depth, inches (mm)	Height, inches (mm)
Specifications	15	84 (2,134)	30 (762)	27 1/2 (699)
Drawers	4	19 5/8 (498)	26 7/8 (683)	1 11/16 (43)
	6	19 5/8 (498)	27 15/16 (710)	3 15/16 (100)
	2	30 1/16 (764)	26 7/8 (683)	1 11/16 (43)
	3	30 1/16 (764)	27 15/16 (710)	3 15/16 (100)
Top Compartment	1	80 (2,032)	27 15/16 (710)	4 7/8 (124)

Colors Available

Red	Gloss Black	Royal Blue	Midnight Blue	Ultra Yellow	Candy Apple Red	Extreme Green	Electric Orange	Arctic Silver	Flat Black Blk Trim	White	Flat Blue Blk Trim
PBO	**PC**	**PCM**	**PDG**	**PES**	**PJH**	**PJJ**	**PJK**	**PKS**	**POT**	**PU**	**PWL**

All EPIQ Series units are available in 12 standard colors.
Add suffix to base stock number for special colors.

KESN602A0PBO

KESN682A0PC

KESN602A0 Series Drawer Sections

Cubic Inches (cm^3)	Square Inches (cm^2)	Net Weight, lb (kg)	Shipping Weight, lb (kg)
26,370 (431,941)	8,223 (53,038)	525 (238)	605 (274)

	Drawers	Width, inches (mm)	Depth, inches (mm)	Height, inches (mm)
Specifications	12	60 (1,524)	30 (762)	27 1/2 (699)
Drawers	2	19 5/8 (498)	26 7/8 (683)	1 11/16 (43)
	4	19 5/8 (498)	27 15/16 (710)	3 15/16 (100)
	2	30 1/16 (764)	26 7/8 (683)	1 11/16 (43)
	4	30 1/16 (764)	27 15/16 (710)	3 15/16 (100)

KESN682A0 Series Drawer Sections

Cubic Inches (cm^3)	Square Inches (cm^2)	Net Weight, lb (kg)	Shipping Weight, lb (kg)
30,616 (501,490)	9,547 (61,578)	600 (272)	685 (311)

	Drawers	Width, inches (mm)	Depth, inches (mm)	Height, inches (mm)
Specifications	12	68 (1,727)	30 (762)	27 1/2 (699)
Drawers	2	19 5/8 (498)	26 7/8 (683)	1 11/16 (43)
	4	19 5/8 (498)	27 15/16 (710)	3 15/16 (100)
	2	38 1/16 (967)	26 7/8 (683)	1 11/16 (43)
	4	38 1/16 (967)	27 15/16 (710)	3 15/16 (100)

KESN842A0PU

KESN843A0PDG

KESN842A0 Series Drawer Sections

Cubic Inches (cm^3)	Square Inches (cm^2)	Net Weight, lb (kg)	Shipping Weight, lb (kg)
38,352 (628,206)	12,195 (78,658)	750 (340)	850 (386)

	Drawers	Width, inches (mm)	Depth, inches (mm)	Height, inches (mm)
Specifications	12	84 (2,032)	30 (762)	27 1/2 (699)
Drawers	2	19 5/8 (498)	26 7/8 (683)	1 11/16 (43)
	4	19 5/8 (498)	27 15/16 (710)	3 15/16 (100)
	2	54 1/16 (1,373)	26 7/8 (683)	1 11/16 (43)
	4	54 1/16 (1,373)	27 15/16 (710)	3 15/16 (100)

KESN843A0 Series Drawer Sections

Cubic Inches (cm^3)	Square Inches (cm^2)	Net Weight, lb (kg)	Shipping Weight, lb (kg)
36,785 (602,538)	11,471 (73,988)	750 (340)	850 (386)

	Drawers	Width, inches (mm)	Depth, inches (mm)	Height, inches (mm)
Specifications	18	84 (2,032)	30 (762)	27 1/2 (699)
Drawers	4	19 5/8 (498)	26 7/8 (683)	1 11/16 (43)
	8	19 5/8 (498)	27 15/16 (710)	3 15/16 (100)
	2	30 1/16 (764)	26 7/8 (683)	1 11/16 (43)
	4	30 1/16 (764)	27 15/16 (710)	3 15/16 (100)

⚠WARNING

- Do not open multiple drawers
- Images may be shown without actual warning labels
- Read safety precautions on pages W1 to W4

EPIQ SERIES: WORKCENTERS

KEWN840B0PBO

EPIQ WorkCenters – Stainless-Steel, Bed Liner or Butcher Block worksurface required to use WorkCenter.

	Overall			Inside					
	Width, inches (mm)	Depth, inches (mm)	Height, inches (mm)	Width, inches (mm)	Depth, inches (mm)	Height, inches (mm)	Square Inches (cm²)	Cubic Inches (cm³)	Weight Net/Ship, lb (kg)
KEWN840B0	84 (2,134)	30 (762)	25 1/2 (648)	80 9/16 (2,046)	26 5/8 (676)	25 (635)	5,130 (33,090)	38,924 (657,575)	355 (161) 410 (186)
KEWN760B0	76 (1,930)	30 (762)	25 1/2 (648)	72 9/16 (1,843)	26 5/8 (676)	25 (635)	4,717 (30,424)	35,060 (574,283)	325 (147) 375 (170)
KEWN680B0	68 (1,727)	30 (762)	25 1/2 (648)	64 9/16 (1,640)	26 5/8 (676)	25 (635)	4,303 (27,757)	31,196 (510,991)	300 (136) 345 (156)
KEWN600B0	60 (1,524)	30 (762)	25 1/2 (648)	56 9/16 (1,437)	26 5/8 (676)	25 (635)	3,890 (25,091)	27,332 (447,698)	275 (125) 315 (143)

OVERHEAD CABINETS

KEHN840B0PBO

Bulk Overhead Cabinets

	Overall			Inside					
	Width, inches (mm)	Depth, inches (mm)	Height, inches (mm)	Width, inches (mm)	Depth, inches (mm)	Height, inches (mm)	Square Inches (cm²)	Cubic Inches (cm³)	Weight Net/Ship, lb (kg)
KEHN840B0	84 (2,134)	30 (762)	20 7/8 (530)	80 1/4 (2,038)	28 3/16 (716)	13 5/8 (346)	2,263 (14,595)	30,888 (505,945)	320 (145) 368 (167)
KEHN760B0	76 (1,930)	30 (762)	20 7/8 (530)	72 1/4 (1,835)	28 3/16 (716)	13 5/8 (346)	2,037 (13,141)	27,811 (455,539)	300 (136) 348 (158)
KEHN680B0	68 (1,727)	30 (762)	20 7/8 (530)	64 1/4 (1,632)	28 3/16 (716)	13 5/8 (346)	1,812 (11,687)	24,733 (405,134)	275 (125) 318 (144)
KEHN600B0	60 (1,524)	30 (762)	20 7/8 (530)	56 1/4 (1,429)	28 3/16 (716)	13 5/8 (346)	1,587 (10,233)	21,656 (354,728)	260 (118) 298 (135)

LOCKERS

KELN301BLPBO

KELN301B Side Locker Cabinets

Side cabinets require attachment to an EPIQ roll cabinet or side cabinet. Cannot be used as a standalone unit.

Cubic Inches (cm³)	Square Inches (cm²)	Load Capacity, lb (kg)	Net Weight, lb (kg)
32,835 (537,837)	4,310 (27,800)	4,000 (1,814)	467 (212)

	Drawers	Width, inches (mm)	Depth, inches (mm)	Height, inches (mm)
Specifications	6/1	30 (762)	30 (762)	74 (1,880)
Pull-Out Bin	2	24 1/8 (613)	23 3/8 (594)	4 (102)
Pull-Out Bin	4	24 1/8 (613)	26 5/8 (676)	4 (102)
Stationary Shelf	1	25 1/2 (648)	24 (610)	—
Can Racks	2	17 7/8 (454)	3 3/16 (81)	4 (102)

KELN301BL – Left side locker
KELN301BR – Right side locker

KEBN301ALPBO

KEBN301A Series Bulk End Cabinet

Cannot be used as a standalone unit.

Cubic Inches (cm³)	Square Inches (cm²)	Load Capacity, lb (kg)	Weight Net/Ship,lb (kg)
17,260 (282,719)	2,461 (15,873)	4,000 (1,814)	390 (177) 440 (200)

	Drawers	Width, inches (mm)	Depth, inches (mm)	Height, inches (mm)
Specifications	3/1	30 (762)	30 (762)	46 7/8 (1,191)
Pull-Out Bin	1	24 1/8 (613)	23 3/8 (594)	4 (102)
Pull-Out Bin	2	24 1/8 (613)	26 5/8 (676)	4 (102)
Stationary Shelf	1	25 1/2 (648)	24 (610)	—
Can Racks	2	17 7/8 (454)	3 3/16 (81)	4 (102)

KEBN301AL – Left side bulk end cabinet
KEBN301AR – Right side bulk end cabinet

Colors Available

Red	Gloss Black	Royal Blue	Midnight Blue	Ultra Yellow	Candy Apple Red	Extreme Green	Electric Orange	Arctic Silver	Flat Black Blk Trim	White	Flat Blue Blk Trim
PBO	PC	PCM	PDG	PES	PJH	PJJ	PJK	PKS	POT	PU	PWL

All EPIQ Series units are available in 12 standard colors. **Add suffix to base stock number for special colors.**

A HIGHER DEGREE OF TOOL STORAGE.

From ball bearing drawer slides, to the chemical-resistant powder coat paint, the Masters Series is built to the most exacting standards. It's tool storage, a step above.

STANDS UP TO THE TOUGHEST TASKS. AND HIGHEST EXPECTATIONS.

Built for tough jobs done by tough customers: the ones with high expectations. That's why the Masters Series is made with no-compromise construction – to ensure the strength and durability the job requires.

Breadth — The widest variety of configuration options – from the single bank roll cab to the race-inspired Tool Utility Vehicle – with all the add-on options you can imagine.

FINE-TUNED FOR PRODUCTIVITY.

Snap-on designed the Masters Series around the way you work, precisely engineering each box and loading it with features to keep you moving forward efficiently.

PowerCab™ — Bolt on to any Masters Series roll cab for a secure way to power your cordless tools.

Extended Cab Feature — Extra-wide drawers for maximum organizational power.

Security — Round key interchangeable core and a lifetime guarantee on all components for peace of mind.

ISO-Ride® Casters — 6" casters for unmatched strength and smoothness when transporting heavy loads.

COLOR: Extreme Green

MASTERS SERIES

No matter what your storage needs, the Masters serves you well.

At Snap-on, we've mastered the art of tool storage – and our Masters Series cabs live up to the loftiest of standards. Built to accommodate any and every storage need, these roll cabs can be customized to sync with every stage of your career. And, from the smooth ball bearing slides to the tough powder-coat paint, they take everything you put in them – and everything the work environment throws at them. Durable, smart, customizable. The Masters serves all that up, and more.

KRL7042PC

MASTERS SERIES

Red	Gloss Black	Royal Blue	Midnight Blue	Ultra Yellow	Candy Apple Red	Extreme Green	Electric Orange	Arctic Silver	Flat Black Blk Trim	White	Flat Blue Blk Trim
PBO	PC	PCM	PDG	PES	PJH	PJJ	PJK	PKS	POT	PU	PWL

TRIM COLORS

Blue | Red | Titanium | Black | Bright Chrome

TOP CHEST

As your skill set grows, so does your tool kit. Our Top Chest helps you max both drawer space and organization by providing 75% of the storage space of a roll cab. Gas shock-assisted lid opens to spacious surface with quick access to batteries, cases and go-to items. For even more convenient space, each drawer bank provides three 4" drawers.

OVERHEAD CABINET

Because it's secure, this bulk space is great for cases and personal items. Actuated gas springs raise the door for convenient access.

DRAWER END CAB

An end cab is an upgrade to a wider roll cab. Snap-on offers a variety of end cab configurations – and the extra work space you'll get from an end cab is yet another benefit.

WORKCENTER

Get the most out of a workday at this convenient place to take notes, work off a laptop, or monitor diagnostic equipment. A WorkCenter opens the door to a back wall that can be organized for tool holders, shelves and lighting. Two gas cylinders assist in opening the door for ease of operation.

LOCKERS

These lockers offer an incredible combination: the ability to expand lengthwise, generous space for larger tools, and configurations to fit both sides of a cab. A standard locker is equipped with four 4"-deep drawers and three adjustable shelves.

*Note stainless steel or bed liner top required when adding a WorkCenter.

MASTERS SERIES: QUICK REFERENCE CHART

KRL1032E

KRL1033C

KRL1023C

KRL1163

KRL7023C

Roll Cabs	Specifications	KRL1032E	KRL1033C	KRL1023C	KRL1163	KRL7023C
Capacity	Approx. Cubic Inches (cm^3)	46,425 (760,769.4)	44,761 (733,501)	44,260 (725,291)	45,593 (747,135)	37,812 (619,628)
	Approx. Square Inches (cm^2)	12,251 (79,038)	12,925 (83,387)	13,111 (84,587)	10,314 (66,542)	11,499 (74,187)
	Load Capacity, lb (Kg)	6,800 (3,084)	6,800 (3,084)	6,800 (3,084)	6,800 (3,084)	6,800 (3,084)
Footprint	Width, inches (mm)	72 7/8 (1,851)	72 7/8 (1,851)	72 7/8 (000)	72 7/8 (1851)	72 7/8 (1,851)
	Depth, inches (mm)	29 1/8 (740)	29 1/8 (740)	29 1/8 (740)	29 1/8 (739.7)	29 1/8 (740)
	Height, inches (mm)	45 7/8 (1,165)	45 7/8 (1,165)	45 7/8 (1,165)	45 7/8 (1,165)	41 3/8 (1, 051)
Drawers	Drawer Banks	2	3	3	3	3
	Drawer Count	12	19	22	16	19
	Widest Drawer, inches (mm) [Qty]	69 (1,753) [2]	69 (1,753) [2]	50 (1,270) [2]	50 (1,270) [2]	50 (1,270) [2]
	Slides, lb (Kg) (Ball Bearing)	227 (103)	227 (103)	227 (103)	227 (103)	227 (103)
	Double Slide (included)	Yes (5)	Yes (2)	Yes (2)	Yes (2)	Yes (2)
Extras	Work Surface	Non-directional Rubber	Non-directional Rubber	Non-directional Rubber	Non-directional Rubber	Non-directional Rubber
	Writing Surface (Qty)	Yes (1)	Yes (1)	Yes (1)	Yes (1)	Yes (1)
	Third Caster Set Option	Yes	Yes	Yes	Yes	Yes
Weight	Net Weight, lb (Kg)	892 (405)	892 (405)	892 (405)	785 (356)	785 (356)
	Shipping Weight, lb (Kg)	1,006 (456)	1,006 (456)	1,006 (456)	1,006 (456)	893 (405)
Optional Add-ons Available	Top Chest	KRL1232	KRL1203B	KRL1203B	KRL1203B	KRL1203B
	Side Cab	KRL1011A KRL1015B	KRL1011A KRL1015B	KRL1011A KRL1015B	KRL1011A KRL1015B	KRL7011A KRL7015B
	Locker	KRL1012B KRL1018	KRL1012B KRL1018	KRL1012B KRL1018	KRL1012B KRL1018	KRL7012A KRL7018
	WorkCenter/ Riser with Door	KRL1072	KRL1072	KRL1072	KRL1072	KRL1072
	Overhead	KRL7245A	KRL7245A	KRL7245A	KRL7245A	KRL7245A
	Stainless-Steel Top	KRSST7003B	KRSST7003B	KRSST7003B	KRSST7003B	KRSST7003B
	Hardwood Top	KRWT7003B	KRWT7003B	KRWT7003B	KRWT7003B	KRWT7003B
	Bedliner Top	KRBLT1023	KRBLT1023	KRBLT1023	KRBLT1023	KRBLT1023

Colors Available

Red	Gloss Black	Royal Blue	Midnight Blue	Ultra Yellow	Candy Apple Red	Extreme Green	Electric Orange	Arctic Silver	Flat Black Blk Trim	Flat Blue Blk Trim	White
PBO	PC	PCM	PDG	PES	PJH	PJJ	PJK	PKS	POT	PWL	PU

All KRL Series units are available in 12 standard colors.
Add suffix to base stock number for special colors.

MASTERS SERIES: QUICK REFERENCE CHART

KRL1022C

KRL7022CPBO

KRL722BPQA

KRL1056C

KRL756C

Roll Cabs	Specifications	KRL1022C	KRL7022C	KRL722B	KRL1056C	KRL756C
Capacity	Approx. Cubic Inches (cm^3)	33,735 (552,818)	32,160 (527,008)	23,251 (381,000)	22,356 (366,350)	15,506 (254,100)
	Approx. Square Inches (cm^2)	9,563 (61,697)	8,341 (53,813)	6,770 (43,677)	6,585 (42,484)	4,677 (30,174)
	Load Capacity, lb (Kg)	6,800 (3,084)	6,800 (3,084)	3,600 (1,633)	3,600 (1,633)	3,600 (1,633)
Footprint	Width, inches (mm)	54 1/4 (1,378)	54 1/4 (1,378)	54 1/4 (1,378)	35 5/8 (892)	35 5/8 (892)
	Depth, inches (mm)	29 1/8 (740)	29 1/8 (740)	24 (610)	29 1/8 (740)	24 (610)
	Height, inches (mm)	45 7/8 (1,165)	41 3/8 (1,051)	39 7/8 (1,013)	44 1/4 (1,124)	39 7/8 (1,013)
Drawers	Drawer Banks	2	2	2	1	1
	Drawer Count	13	11	11	8	7
	Widest Drawer, inches (mm) [Qty]	50 (1,270) [2]	50 (1,270) [2]	50 (1,270) [2]	34 (864)	34 (864)
	Slides, lb (Kg) (Ball Bearing)	227 (103)	227 (103)	261 (118)	227 (103)	261 (118)
	Double Slide (included)	Yes (2)	Yes (2)	Yes (2)	Yes (1)	Yes (1)
Extras	Work Surface	Non-directional Rubber	Non-directional Rubber	Non-directional Rubber	Non-directional Rubber	Non-directional Rubber
	Writing Surface (Qty)	Yes (1)	Yes (1)	Yes (1)	No	No
	Third Caster Set Option	No	No	No	No	No
Weight	Net Weight, lb (Kg)	632 (287)	562 (255)	489 (222)	396 (180)	306 (139)
	Shipping Weight, lb (Kg)	720 (326)	645 (292)	548 (248)	450 (204)	361 (164)
Optional Add-ons Available	Top Chest	KRL1201A	KRL1201A	KRL791A	KRL1251	KRL751
	Side Cab	KRL1011A KRL1015B	KRL7011A KRL7015B	KRL711A KRL715B	KRL1011A KRL1015B	KRL711A KRL715B
	Locker	KRL1012B KRL1018	KRL7012A KRL7018	KRL712B	KRL1012B KRL1018	—
	WorkCenter/ Riser with Door	KRL1054	KRL1054	KRA2454	—	—
	Overhead	KRL5445A	KRL5445A	KRWL5435	—	—
	Stainless-Steel Top	KRSST1001B	KRSST1001B	KRSST761B	KRSST7001	KRSST756
	Hardwood Top	KRWT7002A	KRWT7002A	KRWT761B	KRWT7001A	KRWT756A
	Bedliner Top	KRBLT1022	KRBLT1022	KRBLT722	—	KRBLT756

⚠WARNING

- Do not open multiple drawers
- Images may be shown without actual warning labels
- Read safety precautions on pages W1 to W4

MASTERS SERIES: ROLL CABS

KRL1032EPBO

KRL1033CPCM

MASTERS Series Roll Cab Drawer Sizes

Width		Depth		Height		KRL1032E	KRL1033C
inches	mm	inches	mm	inches	mm	Drawers	Drawers
14 5/8	371	26 15/16	684	1 11/16	43	3	6
14 5/8	371	26 15/16	684	4	102	1	3
14 5/8	371	26 15/16	684	6 3/16	157	—	1
14 5/8	371	26 15/16	684	10 5/8	270	1	1
30 1/2	775	26 15/16	684	1 11/16	43	—	3
30 1/2	775	26 15/16	684	4	102	—	2
30 1/2	775	26 15/16	684	6 3/16	157	—	1
49 1/8	1,248	26 15/16	684	1 9/16	40	1	—
49 1/8	1,248	26 15/16	684	3 13/16	97	3	—
49 1/8	1,248	26 15/16	684	6	152	1	—
67 1/8	1,705	26 15/16	684	2 11/16	68	1	1
67 1/8	1,705	26 15/16	684	4 7/8	124	1	1
					Total Drawer Count	12	19

Colors Available

Red	Gloss Black	Royal Blue	Midnight Blue	Ultra Yellow	Candy Apple Red	Extreme Green	Electric Orange	Arctic Silver	Flat Black Blk Trim	Flat Blue Blk Trim	White
PBO	PC	PCM	PDG	PES	PJH	PJJ	PJK	PKS	POT	PWL	PU

All KRL Series units are available in 12 standard colors.
Add suffix to base stock number for special colors.

KRL1023CPC

KRL1163PJK

KRL7023CPJJ

KRL1163
Includes power tool organizer drawer (tools not included)

MASTERS Series Roll Cab Drawer Sizes

Width		Depth		Height		KRL1023C	KRL1163	KRL7023C
inches	mm	inches	mm	inches	mm	Drawers	Drawers	Drawers
14 5/8	371	26 15/16	684	1 11/16	43	8	2	8
14 5/8	371	26 15/16	684	4	102	4	4	2
14 5/8	371	26 15/16	684	6 3/16	157	1	1	1
14 5/8	371	26 15/16	684	10 5/8	270	1	1	1
14 5/8	371	26 15/16	684	12 13/16	326	—	1	—
30 1/2	775	26 15/16	684	1 11/16	43	3	1	3
30 1/2	775	26 15/16	684	4	102	2	3	1
30 1/2	775	26 15/16	684	6 3/16	157	1	1	1
49 1/8	1,248	26 15/16	684	2 11/16	68	1	1	1
49 1/8	1,248	26 15/16	684	4 7/8	124	1	1	1
					Total Drawer Count	22	16	19

⚠WARNING

- Do not open multiple drawers
- Images may be shown without actual warning labels
- Read safety precautions on pages W1 to W4

MASTERS SERIES: ROLL CABS

KRL1022CPES

KRL7022CPBO

MASTERS Series Roll Cab Drawer Sizes

Width		Depth		Height		KRL1022C	KRL7022C
inches	mm	inches	mm	inches	mm	Drawers	Drawers
14 5/8	371	26 15/16	684	1 11/16	43	3	3
14 5/8	371	26 15/16	684	4	102	1	—
14 5/8	371	26 15/16	684	10 5/8	270	1	1
30 1/2	775	26 15/16	684	1 11/16	43	3	3
30 1/2	775	26 15/16	684	4	102	2	1
30 1/2	775	26 15/16	684	6 3/16	157	1	1
49 1/8	1,248	26 15/16	684	2 11/16	68	1	1
49 1/8	1,248	26 15/16	684	4 7/8	124	1	1
					Total Drawer Count	13	11

Colors Available

Red	Gloss Black	Royal Blue	Midnight Blue	Ultra Yellow	Candy Apple Red	Extreme Green	Electric Orange	Arctic Silver	Flat Black Blk Trim	Flat Blue Blk Trim	White
PBO	PC	PCM	PDG	PES	PJH	PJJ	PJK	PKS	POT	PWL	PU

All KRL Series units are available in 12 standard colors.
Add suffix to base stock number for special colors.

KRL722BPC

KRL1056CPJK

KRL756CPC

MASTERS Series Roll Cab Drawer Sizes

Width		Depth		Height		KRL722B	KRL1056C	KRL756C
inches	mm	inches	mm	inches	mm	Drawers	Drawers	Drawers
14 5/8	371	21 7/8	557	1 11/16	43	3	—	—
14 5/8	371	21 7/8	557	10 5/8	270	1	—	—
30 1/2	775	21 7/8	557	1 11/16	43	3	—	3
30 1/2	775	21 7/8	557	4	102	1	—	3
30 1/2	775	21 7/8	557	6 3/16	157	1	—	1
49 1/8	1,248	21 7/8	557	2 11/16	68	1	—	—
49 1/8	1,248	21 7/8	557	4 7/8	124	1	—	—
30 1/2	775	26 15/16	684	1 11/16	43	—	3	—
30 1/2	775	26 15/16	684	4	102	—	4	—
30 1/2	775	26 15/16	684	6 3/16	157	—	1	—
					Total Drawer Count	11	8	7

⚠WARNING

- Do not open multiple drawers
- Images may be shown without actual warning labels
- Read safety precautions on pages W1 to W4

MASTERS SERIES: TOP CHESTS

KRL1232PCM

KRL1232 Series Top Chest

Cubic Inches (cm³)	Square Inches (cm²)	Net Weight, lb (kg)	Shipping Weight, lb (kg)
33,358 (546,404)	10,533 (67,938)	590 (268)	668 (303)

	Drawers	Width, inches (mm)	Depth, inches (mm)	Height, inches (mm)
Specifications	10	72 7/8 (1,851)	29 1/8 (740)	25 3/8 (645)
Drawers	2	14 5/8 (371)	26 15/16 (684)	1 11/16 (43)
	3	14 5/8 (371)	26 15/16 (684)	4 (102)
	2	49 1/8 (1,248)	26 15/16 (684)	1 11/16 (43)
	3	49 1/8 (1,248)	26 15/16 (684)	4 (102)
Top Compartment	Narrow	18 9/16 (471)	26 7/8 (683)	4 1/8 (105)
	Wide	53 7/8 (1,368)	26 7/8 (683)	4 1/8 (105)

KRL1203BPBO

KRL1203B Series Top Chest

Cubic Inches (cm³)	Square Inches (cm²)	Net Weight, lb (kg)	Shipping Weight, lb (kg)
32,109 (525,945)	9,994 (64,461)	590 (268)	681 (309)

	Drawers	Width, inches (mm)	Depth, inches (mm)	Height, inches (mm)
Specifications	15	72 7/8 (1,851)	29 1/8 (740)	25 3/8 (645)
Drawers	4	14 5/8 (371)	26 15/16 (684)	1 11/16 (43)
	6	14 5/8 (371)	26 15/16 (684)	4 (102)
	2	30 1/2 (775)	26 15/16 (684)	1 11/16 (43)
	3	30 1/2 (775)	26 15/16 (684)	4 (102)
Top Compartment	Narrow	18 9/16 (471)	26 7/8 (683)	4 1/8 (105)
	Wide	53 7/8 (1,368)	26 7/8 (683)	4 1/8 (105)

KRL1201APES

KRL1201A Series Top Chest

Cubic Inches (cm³)	Square Inches (cm²)	Net Weight, lb (kg)	Shipping Weight, lb (kg)
24,456 (400,589)	7,526 (48,543)	424 (192)	505 (229)

	Drawers	Width, inches (mm)	Depth, inches (mm)	Height, inches (mm)
Specifications	10	54 1/4 (1,375)	29 1/8 (740)	25 3/8 (645)
Drawers	2	14 5/8 (371)	26 15/16 (684)	1 11/16 (43)
	3	14 5/8 (371)	26 15/16 (684)	4 (102)
	2	30 1/2 (775)	26 15/16 (684)	1 11/16 (43)
	3	30 1/2 (775)	26 15/16 (684)	4 (102)
Top Compartment	—	53 7/8 (1,368)	26 7/8 (683)	4 1/8 (105)

KRL1251PJK

KRL1251 Series Top Chest

Cubic Inches (cm³)	Square Inches (cm²)	Net Weight, lb (kg)	Shipping Weight, lb (kg)
16,348 (267,780)	5,059 (32,631)	267 (121)	306 (140)

	Drawers	Width, inches (mm)	Depth, inches (mm)	Height, inches (mm)
Specifications	5	35 5/8 (905)	29 1/8 (740)	25 3/8 (645)
Drawers	2	30 1/2 (775)	26 15/16 (684)	1 11/16 (43)
	3	30 1/2 (775)	26 15/16 (684)	4 (102)
Top Compartment	—	35 3/8 (899)	26 7/8 (683)	4 1/8 (105)

Colors Available

Red	Gloss Black	Royal Blue	Midnight Blue	Ultra Yellow	Candy Apple Red	Extreme Green	Electric Orange	Arctic Silver	Flat Black Blk Trim	Flat Blue Blk Trim	White
PBO	PC	PCM	PDG	PES	PJH	PJJ	PJK	PKS	POT	PWL	PU

All KRL Series units are available in 12 standard colors.
Add suffix to base stock number for special colors.

KRL791A Series Top Chest

Cubic Inches (cm³)	Square Inches (cm²)	Net Weight, lb (kg)	Shipping Weight, lb (kg)
15,927 (260,884)	5,132 (33,101)	302 (137)	384 (174)

	Drawers	Width, inches (mm)	Depth, inches (mm)	Height, inches (mm)
Specifications	8	54 1/4 (1,375)	24 (610)	21 (533)
Drawers	2	14 5/8 (371)	21 7/8 (557)	1 11/16 (43)
	2	14 5/8 (371)	21 7/8 (557)	4 (102)
	2	30 1/2 (775)	21 7/8 (557)	1 11/16 (43)
	2	30 1/2 (775)	21 7/8 (557)	4 (102)
Top Compartment	—	53 7/8 (1,368)	21 3/4 (552)	4 1/8 (105)

KRL791APJK

KRL751 Series Top Chest

Cubic Inches (cm³)	Square Inches (cm²)	Net Weight, lb (kg)	Shipping Weight, lb (kg)
13,294 (217,756)	4,115 (26,542)	194 (88)	245 (111)

	Drawers	Width, inches (mm)	Depth, inches (mm)	Height, inches (mm)
Specifications	4	35 5/8 (905)	24 (610)	21 (533)
Drawers	2	30 1/2 (775)	21 7/8 (557)	1 11/16 (43)
	2	30 1/2 (775)	21 7/8 (557)	4 (102)
Top Compartment	—	35 3/8 (899)	21 3/4 (552)	4 1/8 (105)

KRL751PC

WORKCENTERS

WorkCenters

- Door opens virtually effortlessly with gas springs and cam-assist design
- Convenient access to tools, convenient security – able to lock up work-in-progress
- Slots 'n dots™ Plus back panel for use with our tool organizing accessories
- Structural continuity design with corner gussets and the standing seam for increased strength and durability
- Stainless-steel inside walls allow magnetic items to be attached to the walls
- Shiny stainless-steel walls reflect the light, magnifying available light
- Extra key plug to key-alike to roll cab
- Mounting template for drilling – including a drill bit for easier installation

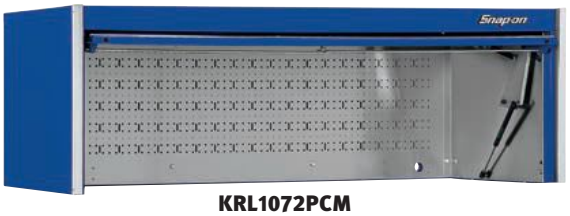

KRL1072PCM

KRA2454PBO

Specifications	KRL1072 Series	KRL1054 Series	KRA2454 Series
Cubic Inches (cm³)	26,522 (434,617)	19,409 (318,056)	13,524 (221,619)
Square Inches (cm²)	4,005 (25,838)	3,136 (20,232)	1,127 (7,271)
Width, inches (mm)	72 7/8 (1,851)	54 1/8 (1,851)	55 (1,397)
Height, inches (mm)	23 9/16 (598.5)	23 9/16 (598.5)	27 (686)
Depth, inches (mm)	27 1/2 (698.5)	27 1/2 (698.5)	22 7/16 (570)
Inside Width, inches (mm)	69 7/16 (1,764)	50 13/16 (1,764)	50 13/16 (1,764)
Net Weight, lb (kg)	214 (97)	176 (80)	165 (74.8)
Shipping Weight, lb (kg)	320 (146)	258 (117)	258 (117)

⚠WARNING

- Do not open multiple drawers
- Images may be shown without actual warning labels
- Read safety precautions on pages W1 to W4

MASTER SERIES: BULK OVERHEAD CABINETS

KRL7245APKS

KRWL5435PBO

Bulk Overhead Cabinets

Specifications	KRL7245A	KRL5445A	KRWL5435
Cubic Inches (cm³)	26,814 (439,219)	19,629 (321,516)	15,076 (246,948)
Square Inches (cm²)	1,740 (11,224)	1,274 (8,216)	1,042 (6,719)
Width, inches (mm)	72 7/8 (1,851)	54 1/4 (1,378)	54 1/4 (1,378)
Height, inches (mm)	18 1/8 (460)	18 1/8 (460)	16 (406)
Depth, inches (mm)	27 1/2 (699)	27 1/2 (699)	21 (533)

DRAWER END CABINETS

KRL1221PC

KRL1221 Series Top Cabinet

Cubic Inches (cm³)	Square Inches (cm²)	Net Weight, lb (kg)	Shipping Weight, lb (kg)
8,115 (132,924)	2,469 (15,925)	170 (77)	218 (99)

	Drawers	Width, inches (mm)	Depth, inches (mm)	Height, inches (mm)
Specifications	5	19 3/4 (502)	29 1/8 (740)	25 3/8 (645)
Drawers	2	14 5/8 (371)	26 15/16 (684)	1 11/16 (43)
	3	14 5/8 (371)	26 15/16 (684)	4 (102)
Top Compartment	—	18 9/16 (471)	26 7/8 (683)	4 1/8 (105)

KRL1011APJJ

KRL1011A Series End Cabinet

Cubic Inches (cm³)	Square Inches (cm²)	Net Weight, lb (kg)	Shipping Weight, lb (kg)
10,735 (175,839)	3,152 (20,330)	267 (121)	295 (134)

	Drawers	Width, inches (mm)	Depth, inches (mm)	Height, inches (mm)
Specifications	8	19 3/4 (502)	29 1/8 (740)	37 5/16 (948)
Drawers	3	14 5/8 (371)	26 15/16 (684)	1 11/16 (43)
	4	14 5/8 (371)	26 15/16 (684)	4 (102)
	1	14 5/8 (371)	26 15/16 (685)	6 3/16 (157)

Colors Available

Red	Gloss Black	Royal Blue	Midnight Blue	Ultra Yellow	Candy Apple Red	Extreme Green	Electric Orange	Arctic Silver	Flat Black Blk Trim	Flat Blue Blk Trim	White
PBO	PC	PCM	PDG	PES	PJH	PJJ	PJK	PKS	POT	PWL	PU

All KRL Series units are available in 12 standard colors.
Add suffix to base stock number for special colors.

KRL1098 Series End Cabinet*

Cubic Inches (cm³)	Square Inches (cm²)	Net Weight, lb (kg)	Shipping Weight, lb (kg)
11,088 (181,700)	2,364 (15,252)	267 (121)	—

	Drawers	Width, inches (mm)	Depth, inches (mm)	Height, inches (mm)
Specifications	6	19 3/4 (502)	29 1/8 (746)	37 5/16 (948)
Drawers	2	14 5/8 (371)	26 15/16 (684)	1 11/16 (43)
	3	14 5/8 (371)	26 15/16 (684)	4 (102)
	1	14 5/8 (371)	26 15/16 (684)	12 13/16 (326)

*The KRL1098 and KRL1163 include a 12" drawer that has a power tool organizer kit.

KRL1098PBO

KRL7011A Series End Cabinet

Cubic Inches (cm³)	Square Inches (cm²)	Net Weight, lb (kg)	Shipping Weight, lb (kg)
9,160 (150,041)	2,758 (17,789)	230 (104)	267 (121)

	Drawers	Width, inches (mm)	Depth, inches (mm)	Height, inches (mm)
Specifications	7	19 3/4 (502)	29 1/8 (740)	32 15/16 (837)
Drawers	3	14 5/8 (371)	26 15/16 (684)	1 11/16 (43)
	3	14 5/8 (371)	26 15/16 (684)	4 (102)
	1	14 5/8 (371)	26 15/16 (684)	6 3/16 (157)

KRL7011APCM

KRL711A Series End Cabinet

Cubic Inches (cm³)	Square Inches (cm²)	Net Weight, lb (kg)	Shipping Weight, lb (kg)
7,438 (121,834)	2,239 (14,442)	193 (88)	225 (102)

	Drawers	Width, inches (mm)	Depth, inches (mm)	Height, inches (mm)
Specifications	7	19 3/4 (502)	24 (610)	32 15/16 (837)
Drawers	3	14 5/8 (371)	21 7/8 (557)	1 11/16 (43)
	3	14 5/8 (371)	21 7/8 (557)	4 (102)
	1	14 5/8 (371)	21 7/8 (557)	6 3/16 (157)

KRL711APES

⚠WARNING

- Secure end cab to roll cab per instructions
- Do not open multiple drawers
- Images may be shown without actual warning labels
- Read safety precautions on pages W1 to W4

MASTERS SERIES: POWERCAB™ END CABINETS

KRL1099PBO

Tools not included

KRL1099 Series *PowerCab* End Cabinet

Cubic Inches (cm³)	Square Inches (cm²)	Net Weight, lb (kg)	Shipping Weight, lb (kg)
11,375 (186,323)	1,584 (10,217)	184 (83)	220 (100)

	Drawers	Width, inches (mm)	Depth, inches (mm)	Height, inches (mm)
Specifications	1	19 3/4 (502)	29 1/8 (740)	37 5/16 (948)

- Includes two adjustable shelves
- Includes integrated power strip

BULK END CABINETS

KRL1015BPBO

KRL1015B Series Bulk End Cabinet

Cubic Inches (cm³)	Square Inches (cm²)	Net Weight, lb (kg)	Shipping Weight, lb (kg)
11,608 (190,139)	1,094 (7,056)	184 (83)	220 (100)

	Drawers	Width, inches (mm)	Depth, inches (mm)	Height, inches (mm)
Specifications	2	19 3/4 (502)	29 1/8 (740)	37 5/16 (948)
Drawers	2	13 1/4 (337)	24 3/4 (629)	4 (102)
Shelves	1	16 1/4 (413)	25 3/8 (645)	Adjustable

KRL7015B Series Bulk End Cabinet

Cubic Inches (cm³)	Square Inches (cm²)	Net Weight, lb (kg)	Shipping Weight, lb (kg)
9,770 (160,033)	1,094 (7,056)	142 (64)	181 (82)

	Drawers	Width, inches (mm)	Depth, inches (mm)	Height, inches (mm)
Specifications	2	19 3/4 (502)	29 1/8 (740)	32 15/16 (837)
Drawers	2	13 1/4 (337)	24 3/4 (629)	4 (102)
Shelves	1	16 1/4 (413)	25 3/8 (645)	Adjustable

Colors Available

Red	Gloss Black	Royal Blue	Midnight Blue	Ultra Yellow	Candy Apple Red	Extreme Green	Electric Orange	Arctic Silver	Flat Black Blk Trim	Flat Blue Blk Trim	White
PBO	PC	PCM	PDG	PES	PJH	PJJ	PJK	PKS	POT	PWL	PU

All KRL Series units are available in 12 standard colors.
Add suffix to base stock number for special colors.

KRL1012B Series Locker

Cubic Inches (cm³)	Square Inches (cm²)	Net Weight, lb (kg)	Shipping Weight, lb (kg)
28,446 (465,945)	3,564 (22,988)	306 (139)	369 (167)

	Drawers	Width, inches (mm)	Depth, inches (mm)	Height, inches (mm)
Specifications	4	24 1/16 (611)	29 1/8 (740)	62 3/8 (1,584)
Drawers	4	19 7/16 (495)	25 1/8 (638)	4 (102)
Shelves	3	24 1/16 (611)	22 3/4 (578)	Adjustable
Trays	2	17 7/8 (454)	3 1/8 (79)	4 (102)

KRL1012BPBO

KRL7012A Series Locker

Cubic Inches (cm³)	Square Inches (cm²)	Net Weight, lb (kg)	Shipping Weight, lb (kg)
26,085 (427,272)	3,564 (22,988)	285 (129)	345 (156)

	Drawers	Width, inches (mm)	Depth, inches (mm)	Height, inches (mm)
Specifications	4	24 1/16 (611)	29 1/8 (740)	57 15/16 (1,472)
Drawers	4	19 1/2 (495)	25 1/8 (638)	4 (102)
Shelves	3	24 1/16 (611)	22 3/4 (578)	Adjustable
Trays	2	17 7/8 (454)	3 1/8 (79)	4 (102)

KRL712B Series Locker

Cubic Inches (cm³)	Square Inches (cm²)	Net Weight, lb (kg)	Shipping Weight, lb (kg)
20,568 (336,904)	2,831 (18,260)	238 (108)	297 (135)

	Drawers	Width, inches (mm)	Depth, inches (mm)	Height, inches (mm)
Specifications	4	24 1/16 (611)	24 (610)	53 7/16 (1,357)
Drawers	4	19 7/16 (495)	20 (508)	4 (102)
Shelves	3	21 1/16 (535)	17 9/16 (446)	Adjustable
Trays	3	17 7/8 (454)	3 1/8 (79)	4 (102)

⚠WARNING

- Secure end cab to roll cab per instructions
- Do not open multiple drawers
- Images may be shown without actual warning labels
- Read safety precautions on pages W1 to W4

MASTERS SERIES: DOCKER LOCKERS®

KRL1018PBO

Docker Locker Lockers

Provides a quick way to secure tools and gives additional bulk storage. Includes a roll cart designed to fit locker (not available separately), KAT18PV can rack and one adjustable shelf. Mounts on either side of KRL1000 or KRL7000 Series roll cabs. Not designed for use with standard roll carts.

KRL1018 Series

Cubic Inches (cm³)	Square Inches (cm²)	Net Weight, lb (kg)	Shipping Weight, lb (kg)
31,642 (518,296)	1,578 (10,178)	202 (92)	295 (134)
	Width, inches (mm)	**Depth, inches (mm)**	**Height, inches (mm)**
Specifications	24 1/16 (611)	29 1/8 (740)	62 3/8 (1,584)

KRL7018 Series

Cubic Inches (cm³)	Square Inches (cm²)	Net Weight, lb (kg)	Shipping Weight, lb (kg)
29,139 (477,297)	1,578 (10,178)	190 (86)	287 (130)
	Width, inches (mm)	**Depth, inches (mm)**	**Height, inches (mm)**
Specifications	24 1/16 (611)	29 1/8 (740)	57 15/16 (1,472)

(US Patent 6, 719, 384)

Colors Available

Red	Gloss Black	Royal Blue	Midnight Blue	Ultra Yellow	Candy Apple Red	Extreme Green	Electric Orange	Arctic Silver	Flat Black Blk Trim	Flat Blue Blk Trim	White
PBO	PC	PCM	PDG	PES	PJH	PJJ	PJK	PKS	POT	PWL	PU

All KRL Series units are available in 12 standard colors.
Add suffix to base stock number for special colors.

KRP1032BPBO1

KRT1032BPC1

KRP1032B Series TUV

Cubic Inches (cm³)	Square Inches (cm²)	Net Weight, lb (kg)	Load Capacity, lb (kg)
113,947 (1,866,452)	19,426 (125,298)	1,975 (896)	6,000 (2,722)

	Drawers	Width, inches (mm)	Depth, inches (mm)	Height, inches (mm)
Specifications	16	124 (3,150)	29 7/8 (759) 35 for tires (889)	70 (1,778)
Drawers in Roll Cab	3	14 5/8 (371)	26 15/16 (684)	1 11/16 (43)
	1	14 5/8 (371)	26 15/16 (684)	4 (102)
	1	14 5/8 (371)	26 15/16 (684)	10 5/8 (270)
	1	49 1/8 (1,248)	26 15/16 (684)	1 9/16 (40)
	3	49 1/8 (1,248)	26 15/16 (684)	3 13/16 (97)
	1	49 1/8 (1,248)	26 15/16 (684)	6 (152)
	1	67 1/8 (1,705)	26 15/16 (684)	4 7/8 (124)
	1	67 1/8 (1,705)	26 15/16 (684)	2 11/16 (68)
Locker Drawers	4	19 7/16 (494)	25 1/8 (638)	4 (102)
Locker Shelves	4	21 1/16 (535)	22 3/4 (578)	Adjustable
Can Tray	1	17 7/8 (454)	3 1/8 (79)	4 (102)
WorkCenter	Dimensions	71 3/8 (1,813)	23 3/4 (603)	23 (584)

Optional Add-Ons Available

Locker	2 Included
WorkStation Riser	KRL1072 Included
Hardwood Top	KRWT7003A option
Stainless Top	Included KRSST7003B
Protective Cover (roll cab)	KACP1023 option
Overhead	KRL7245A option

Includes (1) KAS12PV, (1) KASR12PV and (1) writing surface

KRT1032B Series TUV

Cubic Inches (cm³)	Square Inches (cm²)	Net Weight, lb (kg)	Load Capacity, lb (kg)
120,528 (1,974,249)	26,709 (172,273)	2,350 (1,066)	6,000 (2,722)

	Drawers	Width, inches (mm)	Depth, inches (mm)	Height, inches (mm)
Specifications	26	124 (3,150)	29 7/8 (759) 35 for tires (889)	70 (1,778)
Drawers in Roll Cab	5	14 5/8 (371)	26 15/16 (684)	1 11/16 (43)
	4	14 5/8 (371)	26 15/16 (684)	4 (102)
	1	14 5/8 (371)	26 15/16 (684)	10 5/8 (270)
	3	49 1/8 (1,248)	26 15/16 (684)	1 9/16 (40)
	3	49 1/8 (1,248)	26 15/16 (684)	3 13/16 (97)
	1	49 1/8 (1,248)	26 15/16 (684)	6 (152)
	1	67 1/8 (1,705)	26 15/16 (684)	4 7/8 (124)
	1	67 1/8 (1,705)	26 15/16 (684)	2 11/16 (68)
Locker Drawers	4	19 7/16 (494)	25 1/8 (638)	4 (102)
Locker Shelves	4	21 1/16 (535)	22 3/4 (578)	Adjustable
Can Tray	1	17 7/8 (454)	3 1/8 (79)	4 (102)
Top Chest Compartment	Narrow	18 9/16 (471)	26 7/8 (683)	4 1/8 (105)
	Wide	53 7/8 (1,348)	26 7/8 (683)	4 1/8 (105)

Optional Add-Ons Available

Top Chest	KRL1232 included
Locker	2 Included
Protective Cover (roll cab)	KACP1023 option

Includes (1) KASR12PV and (1) writing surface

Colors Available

Red	Gloss Black	Royal Blue	Midnight Blue	Ultra Yellow	Candy Apple Red	Extreme Green	Electric Orange	Arctic Silver	Flat Black Blk Trim	Flat Blue Blk Trim	White
PBO1	PC1	PCM1	PDG1	PES1	PJH1	PJJ1	PJK1	PKS1	POT1	PWL1	PU1
PBO7	PC7	PCM7	PDG7	PES7	PJH7	PJJ7	PJK7	PKS7	POT7	PWL7	PU7

1 = Stainless-steel work surface (P model) and stainless-steel fenders (P and T models)
7 = Bedliner work surface (P model) and bedliner fenders (P and T models)

All TUV Series units are available in 12 standard colors. **Add suffix to base stock number for special colors.**

⚠WARNING

- Do not open multiple drawers
- Images may be shown without actual warning labels
- Read safety precautions on pages W1 to W4

MASTER SERIES: TOOL UTILITY VEHICLE (TUV)

KRP1023BPOT7

KRT1023BPLU7

KRP1023B Series TUV

Cubic Inches (cm³)	Square Inches (cm²)	Net Weight, lb (kg)	Load Capacity, lb (kg)
111,477 (1,825,993)	20,277 (130,787)	1,975 (896)	6,000 (2,722)

	Drawers	Width, inches (mm)	Depth, inches (mm)	Height, inches (mm)
Specifications	26	124 (3,150)	29 7/8 (759) 35 for tires (889)	70 (1,778)
Drawers in Roll Cab	8	14 5/8 (371)	26 15/16 (684)	1 11/16 (43)
	4	14 5/8 (371)	26 15/16 (684)	4 (102)
	1	14 5/8 (371)	26 15/16 (684)	6 3/16 (157)
	1	14 5/8 (371)	26 15/16 (684)	10 5/8 (270)
	3	30 1/2 (775)	26 15/16 (684)	1 11/16 (43)
	2	30 1/2 (775)	26 15/16 (684)	4 (102)
	1	30 1/2 (775)	26 15/16 (684)	6 3/16 (157)
	1	49 1/8 (1,248)	26 15/16 (684)	4 7/8 (124)
	1	49 1/8 (1,248)	26 15/16 (684)	2 11/16 (68)
Locker Drawers	4	19 7/16 (494)	25 1/8 (638)	4 (102)
Locker Shelves	4	21 1/16 (535)	22 3/4 (578)	Adjustable
Can Tray	1	17 7/8 (454)	3 1/8 (79)	4 (102)
WorkCenter	Dimensions	71 3/8 (1,813)	23 3/4 (603)	23 (5e84)

Includes (1) KAS12PV shelf, (1) KASR12PV screwdriver rack and (1) writing surface

Optional Add-Ons Available

Locker	2 Included
WorkStation Riser	KRL1072 Included
Hardwood Top	KRWT7003A option
Stainless Top	Included KRSST7003B
Protective Cover (roll cab)	KACP1023 option
Overhead	KRL7245A option
Body Guards	See next page for full listing

KRT1023B Series TUV

Cubic Inches (cm³)	Square Inches (cm²)	Net Weight, lb (kg)	Load Capacity, lb (kg)
117,472 (1,924,191)	27,018 (174,266)	2,350 (1,066)	6,000 (2,722)

	Drawers	Width, inches (mm)	Depth, inches (mm)	Height, inches (mm)
Specifications	41	124 (3,150)	29 7/8 (759) 35 for tires (889)	70 (1,778)
Drawers in Roll Cab /Top Chest	12	14 5/8 (371)	26 15/16 (684)	1 11/16 (43)
	10	14 5/8 (371)	26 15/16 (684)	4 (102)
	1	14 5/8 (371)	26 15/16 (684)	6 3/16 (157)
	1	14 5/8 (371)	26 15/16 (684)	10 5/8 (270)
	5	30 1/2 (775)	26 15/16 (684)	1 11/16 (43)
	5	30 1/2 (775)	26 15/16 (684)	4 (102)
	1	30 1/2 (775)	26 15/16 (684)	6 3/16 (157)
	1	49 1/8 (1,248)	26 15/16 (684)	4 7/8 (124)
	1	49 1/8 (1,248)	26 15/16 (684)	2 11/16 (68)
Locker Drawers	4	19 7/16 (494)	25 1/8 (638)	4 (102)
Locker Shelves	4	21 1/16 (535)	22 3/4 (578)	Adjustable
Can Tray	1	17 7/8 (454)	3 1/8 (79)	4 (102)
Top Chest Compartment	Narrow	18 9/16 (471)	26 7/8 (683)	4 1/8 (105)
	Wide	53 7/8 (1,368)	26 7/8 (683)	4 1/8 (105)

Includes (1) KASR12PV screwdriver rack and (1) writing surface

Optional Add-Ons Available

Top Chest	KRL1203B Included
Locker	2 Included
Protective Cover (roll cab)	KACP1023 option
Body Guards	See next page for full listing

Colors Available

Red	Gloss Black	Royal Blue	Midnight Blue	Ultra Yellow	Candy Apple Red	Extreme Green	Electric Orange	Arctic Silver	Flat Black Blk Trim	Flat Blue Blk Trim	White
PBO1	PC1	PCM1	PDG1	PES1	PJH1	PJJ1	PJK1	PKS1	POT1	PWL1	PU1
PBO7	PC7	PCM7	PDG7	PES7	PJH7	PJJ7	PJK7	PKS7	POT7	PWL7	PU7

1 = Stainless-steel work surface (P model) and stainless-steel fenders (P and T models)
7 = Bedliner work surface (P model) and bedliner fenders (P and T models)

All TUV Series units are available in 12 standard colors.
Add suffix to base stock number for special colors.

KRP1022BPMP1

KRP1022B Series TUV

Cubic Inches (cm³)	Square Inches (cm²)	Net Weight, lb (kg)	Load Capacity, lb (kg)
98,413 (1,612,005)	16,868 (108,799)	1,582 (718)	6,000 (2,722)

	Drawers	Width, inches (mm)	Depth, inches (mm)	Height, inches (mm)
Specifications	17	106 (2,692)	29 7/8 (759) 35 for tires (889)	70 (1,778)
Drawers in Roll Cab	3	14 5/8 (371)	26 15/16 (684)	1 11/16 (43)
	1	14 5/8 (371)	26 15/16 (684)	4 (102)
	1	14 5/8 (371)	26 15/16 (684)	10 5/8 (270)
	3	30 1/2 (775)	26 15/16 (684)	1 11/16 (43)
	2	30 1/2 (775)	26 15/16 (684)	4 (102)
	1	30 1/2 (775)	26 15/16 (684)	6 3/16 (157)
	1	49 1/8 (1,248)	26 15/16 (684)	4 7/8 (124)
	1	49 1/8 (1,248)	26 15/16 (684)	2 11/16 (68)
Locker Drawers	4	19 7/16 (494)	25 1/8 (638)	4 (102)
Locker Shelves	4	21 1/16 (535)	22 3/4 (578)	Adjustable
Can Tray	1	17 7/8 (454)	3 1/8 (79)	4 (102)
WorkCenter	**Dimensions**	52 3/4 (1,340)	23 3/4 (603)	23 (584)

Optional Add-Ons Available

Locker	2 Included
WorkStation Riser	KRL1054 Included
Hardwood Top	KRWT7002A option
Stainless Top	Included KRSST1001B
Protective Cover (roll cab)	KACP1022 option
Overhead	KRL5445A option

Includes (1) KAS12PV shelf, (1) 7065JL719 writing surface and (1) KASR12PV screwdriver rack

KRT1022BPQA1

KRT1022B Series TUV

Cubic Inches (cm³)	Square Inches (cm²)	Net Weight, lb (kg)	Load Capacity, lb (kg)
99,267 (1,626,688)	21,036 (135,715)	1,786 (810)	6,000 (2,777)

	Drawers	Width, inches (mm)	Depth, inches (mm)	Height, inches (mm)
Specifications	27	106 (2,692)	29 7/8 (759) 35 for tires (889)	70 (1,778)
Drawers in Roll Cab	5	14 5/8 (371)	26 15/16 (684)	1 11/16 (43)
	4	14 5/8 (371)	26 15/16 (684)	4 (102)
	1	14 5/8 (371)	26 15/16 (684)	10 5/8 (270)
	5	30 1/2 (775)	26 15/16 (684)	1 11/16 (43)
	5	30 1/2 (775)	26 15/16 (684)	4 (102)
	1	30 1/2 (775)	26 15/16 (684)	6 3/16 (157)
	1	49 1/8 (1,248)	26 15/16 (684)	4 7/8 (124)
	1	49 1/8 (1,248)	26 15/16 (684)	2 11/16 (68)
Locker Drawers	4	19 7/16 (494)	25 1/8 (638)	4 (102)
Locker Shelves	4	21 1/16 (535)	22 3/4 (578)	Adjustable
Can Tray	1	17 7/8 (454)	3 1/8 (79)	4 (102)
Top Chest Compartment	Narrow	18 9/16 (471)	26 7/8 (683)	4 1/8 (105)
	Wide	53 7/8 (1,368)	26 7/8 (683)	4 1/8 (105)

Optional Add-Ons Available

Top Chest	KRL1201A Included
Locker	2 Included
Protective Cover (roll cab)	KACP1022
Third Caster Set Option	KACP1022 option

Includes (1) KAS12PV shelf and (1) writing surface

⚠WARNING

- Do not open multiple drawers
- Images may be shown without actual warning labels
- Read safety precautions on pages W1 to W4

MASTER SERIES: TOOL UTILITY VEHICLE (TUV) ACCESSORIES

KP1023JS

KRP/KRT Series Chassis Accessories

Stock No.	Description	Application
KATUVGRILL	Stainless-Steel Front Grill	Fits all Snap-on® TUV units
KATUVFENDER	Stainless-Steel Fender	Fits all *Snap-on* TUV units
KATUVBUMPER	Stainles-Steel Back Bumper	Fits all *Snap-on* TUV units
KP1023JS	Jack Stand	Fits all *Snap-on* TUV units
KATUVBAR54	Stainles-Steel Side Bar	54" step bar fits KRP1022/KRT1022 and KRLR1022 series of TUV units
KATUVBAR72	Stainles-Steel Side Bar	72" step bar fits KRP1023/KRT1023 and KRP1032/KRT1032 series of TUV units
KATUVBRAKE54	Hydraulic Brake Kit	Fits KRP1022/KRT1022 and KRLR1022 series of TUV units
KATUVBRAKE72	Hydraulic Brake Kit	Fits KRP1023/KRT1023 and KRP1032/KRT1032 series of TUV units

KRP/KRT Series Body Guards

Stock No.	Description	Application
KABGBB54	Back bottom body guard for roll cab (54" TUV)	KRP1022/KRT1022
KABGBB72	Back bottom body guard for roll cab (72" TUV)	KRP1023/KRT1023, KRP1032/KRT1032
KABGFB17	Left/Right front bottom body guard for roll cab (17 9/16")	KRP1022/KRT1022, KRP1023/KRT1023, KRP1032/KRT1032
KABGFB33	Center front bottom body guard for roll cab (33 1/2")	KRP1022/KRT1022, KRP1023/KRT1023
KABGFB52	Front bottom body guard for roll cab (52 1/4")	KRP1032/KRT1032 – All units work on “A” & non-A versions
KABGFT17	Left/Right front top body guard for roll cab (17 9/16")	KRP1023/KRT1023, KRP1032/KRT1032
KABGFT51	Front top body guard for roll cab (52 1/8")	KRP1022/KRT1022
KABGFT52A	Front top body guard for roll cab (52 1/8")	KRP1023/KRT1023, KRP1032/KRT1032
KABGFF17	Front face body guard for tool chest (5 1/16" x 17 3/16")	KRT1023/KRT1032
KABGFF51	Front face body guard for tool chest (5 1/16" x 51")	KRT1022/KRT1023/KRT1032
KABGFF52	Front face body guard for WorkCenter (2 7/16" x 52 11/16")	KRP1022
KABGFF71	Front face body guard for WorkCenter (2 7/16" x 71 1/4")	KRP1023/KRP1032
7516X70R	Locker Door Inlay (3 7/8" x 46 7/8")	KRP1022/KRT1022, KRP1023/KRT1023, KRP1032/KRT1032

KRP/KRT Series Diamond Plate Top Mats

Silver Stock No.	Black Stock No.	Description
KPP1022DP	KPP1022RP	Diamond plate top mat set for KRP1022 Series TUV units
KPP1023DP	KPP1023RP	Diamond plate top mat set for KRP1023/KRP1032 Series TUV units
KPT1023DP	KPT1023RP	Diamond plate top mat set for locker tops on KRT1022/ KRT1023/KRT1032 Series TUV units

KRP/KRT Series Covers

Red Stock No.	Black Stock No.	Description
KACP1022	KACP1022PC	Cover for KRP1022/KRT1022 TUV units
KACP1023	KACP1023PC	Cover for KRP1023/KRT1023 TUV units

All listed TUV accessories will work on older KRLP and KRLT TUV units.

MODERN NEEDS. CLASSIC SOLUTION.

Tool storage with a future – but built on a solid past. The Classic Series from Snap-on puts you in control. Add lockers, end cabs, a WorkCenter riser and overhead storage to create tool storage that fits all your needs.

Customizable — Choose your color from nine standard options, your work surface, your lighting and your protection package. Add skins and other options to make your piece unique.

Affordable — Classic tool storage that grows with you by adding top boxes and other storage. Solid engineering, solid value, solid investment: it's built into every Classic Series Snap-on makes.

Lock-n-Roll® Drawers — Retention system keeps drawers in place for safety and security.

Locker Topper — An optional locker topper creates an even height between the locker and top chest or WorkCenter, serving as extra storage space or a battery charging station.

Reinforced Corner Gussets — For strength and durability.

Double-Wall Construction — Full-height inner wall is welded in place for durable, consistent performance.

COLOR: Royal Blue

CLASSIC SERIES

Versatile. Resilient. Stands the test of time. That's how you define a Classic.

Our Classic Series is classic Snap-on: storage that's smart, adaptable and built to last. It's designed to accommodate added storage, and that's a huge plus – because as your career grows, these boxes will grow with you. And, they're rigorously tested to the equivalent of more than 20 years. Which means they'll not only hold your tools – they'll hold their value. Make some additions that will help multiply your business: it all starts with a Classic.

KRA2422PKG8

CLASSIC SERIES

Red	Gloss Black	Royal Blue	White Blk Trim	Midnight Blue	Extreme Green	Electric Orange	Flat Black Blk Trim	White
PBO	PC	PCM	PDC	PDG	PJJ	PJK	POT	PU

TRIM COLORS

Blue	Red	Titanium	Black	Bright Chrome

TOP CHEST

Classic Top Chests offer a generous amount of drawer and storage space – in fact, they nearly double the storage space when added to a roll cab. Six 4" drawers provide for ample tool storage area. And the gas-assisted lid opens to a 5" deep top compartment, configured with a power strip for charging and lighting. For a top performer, choose a Top Chest.

WORKCENTER

Work better with our WorkCenter. It fits over a stainless steel or bed liner work surface to provide a locking work area, the 27" height means more wall space and head clearance than competitive hutches, and two gas cylinders provide smooth, effortless door operation. Need mounting space for magnetic and hanging accessories? The inside walls are stainless steel. And to top things off, an easy installation kit is included.

END CAB

Looking for a big boost in capacity for any Classic Roll Cab? Our End Cabs do the job, with a full bank of six drawers and over 7,500 cubic inches of space. They can be used on either or both sides, and feature double-wall construction with corner gussets to support heavily loaded drawers. A 12-gauge bottom-mounting bracket with two swivel casters equals solid support and easy maneuverability.

LOCKERS

If the Classic Locker is your choice, more power to you: it accommodates a power strip for use as a charging area. You can adjust the position of the three drawers and three shelves – and, add extra drawers/shelves to fit your needs.

*Note stainless steel or bed liner top required when adding a WorkCenter.

CLASSIC SERIES: QUICK REFERENCE CHART

KRA2496PBO

KRA2432PJJ

KRA2423PDC

KRA2411PCM

KRA2422PC

KRA2407PJK

Roll Cabs	Specifications	KRA2496	KRA2432	KRA2423	KRA2411	KRA2422	KRA2407
Capacity	Approx. Cubic Inches (cm^3)	33,000 (540,773)	33,000 (540,773)	31,237 (530,000)	25,000 (409,677)	25,000 (409,677)	16,000 (262,193)
	Approx. Square Inches (cm^2)	8,000 (51,613)	8,500 (54,839)	8,604 (55,509)	6,300 (40,645)	6,300 (40,645)	4,700 (30,322)
	Load Capacity (kg)	2,400 (1,089)	2,400 (1,089)	2400 (1089)	2,400 (1,089)	2,400 (1,089)	2,400 (1,089)
Footprint	Width, inches (mm)	73 (1,854)	73 (1,854)	73 (1,854)	55 (1,397)	55 (1,397)	36 (914)
	Depth, inches (mm)	24 (610)	24 (610)	24 (609.6)	24 (610)	24 (610)	24 (610)
	Height, inches (mm)	39 (991)	39 (991)	39 (991)	39 (991)	39 (991)	39 (991)
Drawers	Drawer Banks	2	2	3	2	2	1
	Drawer Count	12	12	17	11	10	7
	Widest Drawer, inches (mm)	50 (1,270)	50 (1,270)	50 (1,270)	50 (1,270)	50 (1,270)	32 (813)
	Slides, lb (kg) (ball bearing)	120 (54)	120 (54)	120 (54)	120 (54)	120 (54)	120 (54)
	Double Slides	Yes (2 drawers)	Yes (5 drawers)	Yes (2 drawers)	Yes (2 drawers)	Yes (2 drawers)	No
Extras	Top Mat	Unidirectional Rubber	Unidirectional Rubber	Unidirectional Rubber	Unidirectional Rubber	Unidirectional Rubber	Unidirectional Rubber
	Writing Surface	Optional	Optional	Optional	Optional	Optional	Optional
Weight	Net Weight, lb (kg)	555 (252)	547 (248)	555 (252)	412 (187)	412 (187)	320 (145)
	Shipping Weight, lb (kg)	637 (289)	643 (292)	670 (303)	480 (218)	480 (218)	356 (162)
Optional Add-ons Available	Top Chest	KRA2415	KRA2415	KRA2415	KRA2410	KRA2410	KRA2405
	Side Cab	KRA2406	KRA2406	KRA2406	KRA2406	KRA2406	KRA2406
	Locker	KRA2403	KRA2403	KRA2403	KRA2403	KRA2403	KRA2403
	Work Station Riser w/ Door	KRA2472	KRA2472	KRA2472	KRA2454	KRA2454	No
	Overhead	KRWL3635 (2)	KRWL3635 (2)	KRWL3635 (2)	KRWL5435	KRWL5435	No
	Hardwood Top	KRWT2418	KRWT2418	KRWT2418	KRWT2411	KRWT2411	KRWT2407
	Stainless Top	KRSST2418	KRSST2418	KRSST2418	KRSST2411	KRSST2411	KRSST2407
	Bedliner Top	KRBLT2418	KRBLT2418	KRBLT2418	KRBLT2411	KRBLT2411	KRBLT2407
	Third Caster Set Option	No	No	No	No	No	No

CUSTOM GUARD SETS FOR CLASSIC

KRA2422PWEBO

Custom Guard Sets for CLASSIC, available in over 13 color schemes. Talk to your Snap-on® representative.

KRA2496PBO

KRA2432PC
(Optional Stainless-Steel Top Shown)

CLASSIC Series Roll Cab Drawer Sizes

Specifications	Width		Depth		Height		KRA2496	KRA2432
	inches	mm	inches	mm	inches	mm	Drawers	Drawers
2" Narrow	14 5/8	371	21 7/8	557	1 11/16	43	1	3
4" Narrow	14 5/8	371	21 7/8	557	4	102	3	2
6" Narrow	14 5/8	371	21 7/8	557	6 3/16	157	1	—
10" Narrow	14 5/8	371	21 7/8	557	10 9/16	270	—	1
2" Wide	30 1/2	775	21 7/8	557	1 11/16	43	3	—
4" Wide	30 1/2	775	21 7/8	557	4	102	2	—
6" Wide	30 1/2	775	21 7/8	557	6 3/16	157	1	—
2" Extra Wide	49 1/8	1,248	21 7/8	557	1 9/16	40	—	1
4" Extra Wide	49 1/8	1,248	21 7/8	557	4	102	1	4
6" Extra Wide	49 1/8	1,248	21 7/8	557	6 3/16	157	—	1
					Total Drawer Count		12	12

Colors Available

Red	Gloss Black	Royal Blue	White Blk Trim	Midnight Blue	Extreme Green	Electric Orange	Flat Black Blk Trim	White
PBO	PC	PCM	PDC	PDG	PJJ	PJK	POT	PU

All CLASSIC Series units are available in nine standard colors.
Add suffix to base stock number for special colors.

⚠WARNING

- Do not open multiple drawers
- Images may be shown without actual warning labels
- Read safety precautions on pages W1 to W4

CLASSIC SERIES: ROLL CABS

KRA2422PJJ

KRA2423PBO

KRA2411PCM

KRA2407PBO

CLASSIC Series Roll Cab Drawer Sizes

Specifications	Width		Depth		Height		KRA2422	KRA2423	KRA2411	KRA2407
	inches	mm	inches	mm	inches	mm	Drawers	Drawers	Drawers	Drawers
2" Narrow	14 5/8	371	21 7/8	557	1 3/4	43	1	4	1	—
4" Narrow	14 5/8	371	21 7/8	557	4	102	1	4	2	—
6" Narrow	14 5/8	371	21 7/8	557	6 3/16	157	—	1	—	—
10" Narrow	14 5/8	371	21 7/8	557	10 9/16	270	1	1	1	—
2" Wide	30 1/2	775	21 7/8	557	1 3/4	43	3	3	3	3
4" Wide	30 1/2	775	21 7/8	557	4	102	1	1	2	3
6" Wide	30 1/2	775	21 7/8	557	6 3/16	157	1	1	1	1
4" Extra Wide	49 1/8	1,248	21 7/8	557	3 13/16	97	—	0	1	—
5" Extra Wide	49 1/8	1,248	21 7/8	557	4 7/8	124	1	1	—	—
3" Extra Wide	49 1/8	1,248	21 7/8	557	2 11/16	68	1	1	—	—
					Total Drawer Count		10	17	11	7

Colors Available

Red	Gloss Black	Royal Blue	White Blk Trim	Midnight Blue	Extreme Green	Electric Orange	Flat Black Blk Trim	White
PBO	PC	PCM	PDC	PDG	PJJ	PJK	POT	PU

All CLASSIC Series units are available in nine standard colors.
Add suffix to base stock number for special colors.

KRA2415 Series Top Chest

Cubic Inches (cm^3)	Square Inches (cm^2)		Net Weight, lb (kg)		Shipping Weight, lb (kg)
28,348 (464,540)	8,174 (52,735)		496 (225)		555 (252)
	Drawers	Width, inches (mm)	Depth, inches (mm)		Height, inches (mm)
Specifications	15	73 3/8 (1,864)	24 (609)		28 5/8 (726)
Drawers 2" Narrow	4	14 5/8 (371)	21 7/8 (557)		1 11/16 (43)
4" Narrow	6	14 5/8 (371)	21 7/8 (557)		4 (102)
2" Wide	2	30 1/2 (775)	21 7/8 (557)		1 11/16 (43)
4" Wide	3	30 1/2 (775)	21 7/8 (557)		4 (102)
Top Compartment	—	72 (1,829)	23 3/4 (603)		5 (127)

KRA2415PBO

KRA2410 Series Top Chest

Cubic Inches (cm^3)	Square Inches (cm^2)		Net Weight, lb (kg)		Shipping Weight, lb (kg)
21,283 (348,766)	6,137 (39,593)		361 (163)		417 (189)
	Drawer Description	Drawers	Width, inches (mm)	Depth, inches (mm)	Height, inches (mm)
Specifications		10	55 (1,397)	24 (607)	28 5/8 (726)
Drawers	2" Narrow	2	14 5/8 (371)	21 7/8 (557)	1 11/16 (43)
	4" Narrow	3	14 5/8 (371)	21 7/8 (557)	4 (102)
	2" Wide	2	30 1/2 (775)	21 7/8 (557)	1 11/16 (43)
	4" Wide	3	30 1/2 (775)	21 7/8 (557)	4 (102)
Top Compartment		—	54 (1,372)	23 3/4 (603)	5 (125)

KRA2410PBO

KRA2405 Series Top Chest

Cubic Inches (cm^3)	Square Inches (cm^2)		Net Weight, lb (kg)		Shipping Weight, lb (kg)
14,333 (234,875)	4,139 (26,703)		222 (101)		281 (127)
	Drawers	Width, inches (mm)	Depth, inches (mm)		Height, inches (mm)
Specifications	5	36 3/8 (924)	24 (609)		28 5/8 (711)
Drawers	2	30 1/2 (775)	21 7/8 (557)		1 11/16 (43)
	3	30 1/2 (775)	21 7/8 (557)		4 (102)
Top Compartment	—	35 3/4 (907)	23 3/4 (603)		5 (125)

KRA2405PC

⚠WARNING

- Do not open multiple drawers
- Images may be shown without actual warning labels
- Read safety precautions on pages W1 to W4

CLASSIC SERIES: WORKSTATION RISERS

KRA2472PCM

- Factory assembled unit complete with door
- Work surface required

Stock Number	KRA2472 Riser	KRA2454 Riser
Cubic Inches (cm³)	23,265 (381,245)	13,524 (221,619)
Square Inches (cm²)	1,551 (10,006)	1,127 (7,271)
Width, inches (mm)	73 (1,854)	55 (1,397)
Height, inches (mm)	27 (686)	27 (686)
Depth, inches (mm)	22 7/16 (570)	22 7/16 (570)

LOCKERS

KRA2403PJK

KRA2403 Series Lockers

Cubic Inches (cm³)	Square Inches (cm²)	Net Weight, lb (kg)	Shipping Weight, lb (kg)
17,035 (279,154)	2,509 (16,188)	375 (170)	418 (189)

	Drawers	Width, inches (mm)	Depth, inches (mm)	Height, inches (mm)
Specifications	3	24 3/4 (635)	24 (610)	61 (1,549) w/ casters 54 (1,372) w/out casters
Drawers	3	20 3/8 (518)	19 1/2 (495)	3 13/16 (97)
Shelves/Trays	3	20 3/8 (518)	21 1/2 (546)	9 1/2 (241)

Ball slide capacity 125 lb per drawer.

END CABINETS

KRA2406APJK

KRA2406A Series End Cabinets

Cubic Inches (cm³)	Square Inches (cm²)	Net Weight, lb (kg)	Shipping Weight, lb (kg)
7,574 (124,115)	1,918 (12,374)	220 (99)	258 (117)

	Drawers	Width, inches (mm)	Depth, inches (mm)	Height, inches (mm)
Specifications	6	20 1/4 (514)	24 (609)	39 1/4 (997)
Drawers	3	14 5/8 (371)	21 7/8 (557)	1 11/16 (43)
	2	14 5/8 (371)	21 7/8 (557)	4 (102)
	1	14 5/8 (371)	21 7/8 (557)	10 9/16 (270)

Ball slide capacity 125 lb per drawer.

Colors Available

Red	Gloss Black	Royal Blue	White Blk Trim	Midnight Blue	Extreme Green	Electric Orange	Flat Black Blk Trim	White
PBO	PC	PCM	PDC	PDG	PJJ	PJK	POT	PU

All CLASSIC Series units are available in nine standard colors.
Add suffix to base stock number for special colors.

STORAGE. LOADED WITH POTENTIAL.

Even new techs deserve Snap-on quality. The Heritage Series delivers exceptional construction at a superior value. Build your tool storage as your career grows, adding components to meet your needs along the way.

Lock-n-Roll® Drawers — Premium-quality drawers that won't drift open.

Double-Wall Construction — Ensures an outer dent won't affect drawer performance.

Gas-assisted Lifts on Top Chests — Quality hydraulic lifts for safety and performance.

Flexible Storage Options — Interchangeable drawers adjust to the way you work.

Medium-Duty Casters — Impact-absorbing wheels with smooth performance.

Four Color Options — Add a range of optional accessories to personalize your tool storage.

COLOR: Red

HERITAGE SERIES: ROLL CABS

KRA5318F

KRA5311F

KRA4813F

KRA4107F

KRA4008F

KRA2007F

KRA2005F

Roll Cabs	Specifications	KRA5318F	KRA5311F	KRA4813F	KRA4107F	KRA4008F	KRA2007F	KRA2005F
Capacity	Approx. Cubic Inches (cm^3)	19,200 (314,632)	20,000 (327,741)	14,000 (229,419)	15,000 (245,806)	10,000 (163,871)	10,000 (163,871)	10,000 (163,871)
	Approx. Square Inches (cm^2)	5,000 (32,258)	5,000 (32,258)	4,000 (25,806)	4,250 (27,419)	3,000 (19,355)	2,800 (18,064)	2,400 (15,484)
	Load Capacity, lb (Kg)	2,400 (1,089)	2,400 (1,089)	2,400 (1,089)	2,400 (1,089)	1,300 (590)	1,100 (499)	1,100 (499)
Footprint	Width, inches (mm)	53 (1,397)	53 (1,397)	40 (1,016)	40 (1,016)	26 (660)	26 (660)	26 (660)
	Depth, inches (mm)	20 (508)	20 (508)	20 (508)	20 (508)	20 (508)	20 (508)	20 (508)
	Height, inches (mm)	38 1/2 (978)	38 1/2 (978)	38 1/2 (978)	38 1/2 (978)	37 (940)	37 (940)	37 (940)
Drawers	Drawer Banks	3	2	2	1	1	1	1
	Drawer Count	18	11	13	7	8	7	5
	Widest Drawer, inches (mm)	35 (880)	48 (1,219)	35 (880)	35 (880)	23 (584)	23 (584)	23 (584)
	Slides, lb (Kg) (ball bearing)	120 (54)	120 (54)	120 (54)	120 (54)	120 (54)	100 (45)	100 (45)
	Double Slides	Yes (1 drawer)	Yes (1 drawer)	Yes (1 drawer)	Yes (1 drawer)	Optional	Optional	Optional
Extras	Top Mat	Unidirectional Rubber	Unidirectional Rubber	Unidirectional Rubber	Unidirectional Rubber	Unidirectional Rubber	Unidirectional Rubber	Unidirectional Rubber
Weight	Net Weight, lb (Kg)	371 (168)	349 (158)	297 (135)	275 (125)	183 (83)	170 (77)	162 (73)
	Shipping Weight, lb (Kg)	454 (206)	400 (181)	327 (148)	305 (138)	252 (114)	239 (108)	231 (105)
Optional Add-ons Available	Top Chest	KRA5308F	KRA5308F	KRA4114F, KRA4810F	KRA4114F, KRA4810F	KRA4014F	KRA2055, KRA4014F	KRA2055, KRA4014F
	Side Cab	KRA4820F, KRA4830F	KRA4820F, KRA4830F	KRA4820F, KRA4830F	KRA4820F, KRA4830F	—	—	—
	Locker	KRA5012F	KRA5012F	KRA5012F	KRA5012F	—	—	—
	Middle Drawer Section	—	—	KRA4860F	KRA4860F	KRA2063	KRA2063	KRA2063
	Hardwood Top	KRWT5300	KRWT5300	KRWT40F	KRWT40F	KRWT26F	KRWT26F	KRWT26F
	Stainless Top	KRSST5300	KRSST5300	KRSST40F	KRSST40F	—	—	—

KRA5318FPBO

KRA5311FPC

KRA4813FPCM

KRA4107FPJK

HERITAGE Series Roll Cab Drawer Sizes

Specifications	Width		Depth		Height		KRA5318F	KRA5311F	KRA4813F	KRA4107F
	inches	mm	inches	mm	inches	mm	Drawers	Drawers	Drawers	Drawers
2" Narrow	11 3/16	285	17 1/2	445	1 5/8	41	2	3	4	—
4" Narrow	11 3/16	285	17 1/2	445	3 5/8	92	7	1	1	—
8" Narrow	11 3/16	285	17 1/2	445	7 5/8	193	1	—	—	—
12" Narrow	11 3/16	285	17 1/2	445	11 5/8	295	1	1	1	—
2" Wide	21 7/16	544	17 1/2	445	1 5/8	41	2	—	2	—
2" Extra Wide	34 3/4	881	17 1/2	445	1 5/8	41	—	1		2
4" Wide	21 7/16	544	17 1/2	445	3 5/8	92	3	—	3	—
4" Extra Wide	34 3/4	881	17 1/2	445	3 5/8	92	1	3	1	4
8" Wide	21 7/16	544	17 1/2	445	7 5/8	193	1	—	1	—
8" Extra Wide	34 3/4	881	17 1/2	445	7 5/8	193	—	1	—	1
6" Super Wide	47 3/4	1,214	17 1/2	445	5 9/16	141	—	1	—	—
						Total Drawer Count	18	11	13	7

Colors Available

Red	Gloss Black	Royal Blue	Electric Orange
PBO	**PC**	**PCM**	**PJK**

All KRA5000 and KRA4000 Series units are available in four standard colors.

Add suffix to base stock number for special colors.

⚠WARNING

- Do not open multiple drawers
- Images may be shown without actual warning labels
- Read safety precautions on pages W1 to W4

HERITAGE SERIES: ROLL CABS

KRA4008FPC

KRA2007FPBO

KRA2005FPCM

HERITAGE Series Roll Cab Drawer Sizes

Specifications	Width		Depth		Height		KRA4008F	KRA2007F	KRA2005F
	inches	mm	inches	mm	inches	mm	Drawers	Drawers	Drawers
2" Wide	21 3/8	544	17 1/2	445	1 5/8	41	4	2	—
4" Wide	21 3/8	544	17 1/2	445	3 5/8	92	3	4	4
8" Wide	21 3/8	544	17 1/2	445	7 5/8	193	1	1	—
12" Wide	21 3/8	544	17 1/2	445	11 5/8	295	—	—	1
					Total Drawer Count		8	7	5

Colors Available

Red	Gloss Black	Royal Blue	Electric Orange
PBO	PC	PCM	PJK

All KRA5000 and KRA4000 Series units are available in four standard colors.

Add suffix to base stock number for special colors.

Colors Available

Red	Gloss Black	Royal Blue
PBO	PC	PCM

KRA2007and KRA2005 Series units are available in three standard colors.

Add suffix to base stock number for special colors.

TOP CHESTS

KRA5308FPBO

KRA5308F Series Top Chest

Cubic Inches (cm³)	Square Inches (cm²)	Net Weight, lb (kg)	Shipping Weight, lb (kg)
12,970 (212,540)	4,191 (27,039)	224 (102)	269 (122)

	Drawers	Width, inches (mm)	Depth, inches (mm)	Height, inches (mm)
Specifications	8	53 3/8 (1,356)	19 13/16 (503)	19 3/8 (493)
Drawers	2	11 1/8 (283)	17 1/2 (445)	1 5/8 (41)
	2	11 1/8 (283)	17 1/2 (445)	3 5/8 (92)
	2	34 3/4 (881)	17 1/2 (445)	1 5/8 (41)
	2	34 3/4 (881)	17 1/2 (445)	3 5/8 (92)
Top Compartment	—	52 3/8 (1,328)	18 3/4 (475)	4 5/8 (118)

Colors Available

Red	Gloss Black	Royal Blue	Electric Orange
PBO	PC	PCM	PJK

All KRA5000 and KRA4000 Series units are available in four standard colors.

Add suffix to base stock number for special colors.

KRA5315FPCM

KRA5315F Series Top Chest

Cubic Inches (cm^3)	Square Inches (cm^2)	Net Weight, lb (kg)	Shipping Weight, lb (kg)
10,758 (176,324)	4,065 (26,227)	244 (110)	298 (135)

	Drawers	Width, inches (mm)	Depth, inches (mm)	Height, inches (mm)
Specifications	15	53 3/8 (1,356)	19 13/16 (503)	19 7/16 (494)
Drawers	6	11 1/8 (283)	17 1/2 (445)	1 5/8 (41)
	4	11 1/8 (283)	17 1/2 (445)	3 5/8 (91)
	2	21 3/8 (542)	17 1/2 (445)	1 5/8 (41)
	2	21 3/8 (542)	17 1/2 (445)	3 5/8 (91)
	1	34 3/4 (881)	17 1/2 (445)	3 5/8 (91)

KRA4810FPJK

KRA4810F Series Top Chest

Cubic Inches (cm^3)	Square Inches (cm^2)	Net Weight, lb (kg)	Shipping Weight, lb (kg)
9,359 (153,370)	3,026 (19,520)	196 (89)	226 (103)

	Drawers	Width, inches (mm)	Depth, inches (mm)	Height, inches (mm)
Specifications	8	40 (1,016)	19 13/16 (503)	19 7/16 (494)
Drawers	2	11 1/8 (283)	17 1/2 (445)	1 5/8 (41)
	2	11 1/8 (283)	17 1/2 (445)	3 5/8 (91)
	2	21 3/8 (283)	17 1/2 (445)	1 5/8 (41)
	2	21 3/8 (283)	17 1/2 (445)	3 5/8 (91)
Top Compartment	—	39 7/8 (1,013)	18 1/2 (475)	4 3/4 (120)

KRA4114FPCM

KRA4114F Series Top Chest

Cubic Inches (cm^3)	Square Inches (cm^2)	Net Weight, lb (kg)	Shipping Weight, lb (kg)
9,746 (159,710)	3,178 (20,500)	183 (83)	213 (97)

	Drawers	Width, inches (mm)	Depth, inches (mm)	Height, inches (mm)
Specifications	4	40 (1,016)	19 13/16 (503.2)	19 7/16 (493.7)
Drawers	2	34 3/4 (881)	17 1/2 (445)	1 5/8 (41)
	2	34 3/4 (881)	17 1/2 (445)	3 5/8 (91)
Top Compartment	—	39 7/8 (1,014)	18 3/4 (475)	4 3/4 (120)

KRA4014FPC

KRA4014F Series Top Chest

Cubic Inches (cm^3)	Square Inches (cm^2)	Net Weight, lb (kg)	Shipping Weight, lb (kg)
6,180 (101,270)	1,995 (12,870)	119 (54)	142 (64)

	Drawers	Width, inches (mm)	Depth, inches (mm)	Height, inches (mm)
Specifications	4	26 3/4 (678)	19 13/16 (503)	19 7/16 (494)
Drawers	2	21 3/8 (542)	17 1/2 (445)	1 5/8 (41)
	2	21 3/8 (542)	17 1/2 (445)	3 5/8 (91)
Top Compartment	—	26 5/8 (675)	18 3/4 (475)	4 3/4 (120)

Colors Available

Red	Gloss Black	Royal Blue	Electric Orange
PBO	**PC**	**PCM**	**PJK**

All KRA5000 and KRA4000 Series units are available in four standard colors.

Add suffix to base stock number for special colors.

⚠WARNING

- Do not open multiple drawers
- Images may be shown without actual warning labels
- Read safety precautions on pages W1 to W4

HERITAGE SERIES: TOP CHESTS

KRA2055FPBO

KRA4059FPC

KRA2055F Top Chest

Cubic Inches (cm^3)	Square Inches (cm^2)	Net Weight, lb (kg)	Shipping Weight, lb (kg)
4,452 (72,955)	1,814 (11,703)	90 (41)	110 (50)

	Drawers	Width, inches (mm)	Depth, inches (mm)	Height, inches (mm)
Specifications	5	26 (660)	14 3/4 (373)	17 1/4 (437)
Drawers	4	22 1/8 (559)	13 1/8 (332)	1 7/8 (47)
	1	22 1/8 (559)	13 1/8 (332)	3 1/8 (79)
Top Compartment	—	25 13/16 (655)	13 3/4 (348)	3 7/8 (97)

Colors Available

Red	Gloss Black	Royal Blue
PBO	**PC**	**PCM**

All KRA2055 Series units are available in three standard colors.

Add suffix to base stock number for special colors.

KRA4059F Series Top Chest

Cubic Inches (cm^3)	Square Inches (cm^2)	Net Weight, lb (kg)	Shipping Weight, lb (kg)
4,288 (70,268)	1,753 (11,309)	92 (42)	117 (53)

	Drawers	Width, inches (mm)	Depth, inches (mm)	Height, inches (mm)
Specifications	9	26 (660)	14 3/4 (373)	17 3/16 (436)
Drawers	6	6 11/16 (169)	13 1/8 (332)	1 3/4 (44)
	2	22 1/8 (559)	13 1/8 (332)	1 7/8 (47)
	1	22 1/8 (559)	13 1/8 (332)	3 1/8 (79)
Top Compartment	—	25 13/16 (655)	13 3/4 (348)	3 7/8 (97)

Colors Available

Red	Gloss Black	Royal Blue	Electric Orange
PBO	**PC**	**PCM**	**PJK**

All KRA5000 and KRA4000 Series units are available in four standard colors.

Add suffix to base stock number for special colors.

DRAWER SECTIONS

KRA4860FPBO

KRA2063FPC

KRA4860F Series Drawer Sections

Cubic Inches (cm^3)	Square Inches (cm^2)	Net Weight, lb (kg)	Shipping Weight, lb (kg)
3,112 (50,997)	1,216 (7,845)	115 (52)	145 (66)

	Drawers	Width, inches (mm)	Depth, inches (mm)	Height, inches (mm)
Specifications	2	40 (1,016)	19 13/16 (503)	9 13/16 (249)
Drawers	1	34 11/16 (881)	17 9/16 (445)	1 5/8 (41)
	1	34 11/16 (881)	17 9/16 (445)	3 5/8 (91)

Colors Available

Red	Gloss Black	Royal Blue	Electric Orange
PBO	**PC**	**PCM**	**PJK**

All KRA5000 and KRA4000 Series units are available in four standard colors.

Add suffix to base stock number for special colors.

KRA2063F Series Drawer Sections

Cubic Inches (cm^3)	Square Inches (cm^2)	Net Weight, lb (kg)	Shipping Weight, lb (kg)
1,792 (29,365)	1,124 (7,252)	70 (22)	94 (43)

	Drawers	Width, inches (mm)	Depth, inches (mm)	Height, inches (mm)
Specifications	3	26 (660)	19 13/16 (503)	9 11/16 (246)
Drawers	3	21 3/8 (544)	17 9/16 (445)	1 5/8 (41)

Colors Available

Red	Gloss Black	Royal Blue
PBO	**PC**	**PCM**

All KRA2063 Series units are available in three standard colors.

Add suffix to base stock number for special colors.

KRA5012F Series Lockers

Cubic Inches (cm^3)	Square Inches (cm^2)	Net Weight, lb (kg)	Shipping Weight, lb (kg)
10,177 (166,770)	1,480 (9,548)	115 (52)	145 (66)

	Drawers	Width, inches (mm)	Depth, inches (mm)	Height, inches (mm)
Specifications	**4**	16 1/2 (419)	19 13/16 (503)	51 1/2 (1,308)
Drawers	**2**	11 3/16 (288)	17 9/16 (445)	1 5/8 (41)
	2	11 3/16 (288)	17 9/16 (445)	3 5/8 (92)
Shelves	**3**	12 3/8 (315)	18 3/4 (475)	11 3/4 (297)

Colors Available

Red	Gloss Black	Royal Blue	Electric Orange
PBO	**PC**	**PCM**	**PJK**

All KRA5000 and KRA4000 Series units are available in four standard colors.

Add suffix to base stock number for special colors.

KRA5012FPBO

END CABINETS

KRA4820F Series End Cabinets

Cubic Inches (cm^3)	Square Inches (cm^2)	Net Weight, lb (kg)	Shipping Weight, lb (kg)
5,094 (83,476)	1,174 (7,574)	117 (53)	147 (67)

	Drawers	Width, inches (mm)	Depth, inches (mm)	Height, inches (mm)
Specifications	**6**	16 1/2 (419)	19 13/16 (503)	32 1/8 (815)
Drawers	**2**	11 1/8 (283)	17 9/16 (445)	1 9/16 (39.7)
	3	11 1/8 (283)	17 9/16 (445)	3 1/2 (88.9)
	1	11 1/8 (283)	17 9/16 (445)	11 3/4 (297)

KRA4820FPC

KRA4830F Series End Cabinets

Cubic Inches (cm^3)	Square Inches (cm^2)	Net Weight, lb (kg)	Shipping Weight, lb (kg)
8,426 (138,080)	843 (5,439)	76 (35)	97 (44)

	Width, inches (mm)	Depth, inches (mm)	Height, inches (mm)
Specifications	16 1/2 (419)	19 13/16 (503)	32 5/16 (820)
Shelves 2	15 1/16 (381)	18 5/8 (473)	—
Lower Compartment 1	15 1/16 (381)	18 5/8 (473)	—

Colors Available

Red	Gloss Black	Royal Blue	Electric Orange
PBO	**PC**	**PCM**	**PJK**

All KRA5000 and KRA4000 Series units are available in four standard colors.

Add suffix to base stock number for special colors.

KRA4830FPBO

⚠WARNING

- Secure end cab to roll cab per instructions
- Do not open multiple drawers
- Images may be shown without actual warning labels
- Read safety precautions on pages W1 to W4

DURABILITY. IN MOTION.

Wherever you go, Snap-on has the perfect tool storage solution to take along. With over a dozen options, Snap-on® Mobile Solutions are strong, safe and ready to roll. Stranded? That's something you'll never have to worry about again.

Mobility — Heavy Duty EPIQ SideKIQ™ has 7"x2" ISO-ride® casters to navigate rough floors and gravel. 40" carts use 6"x2" monoprene soft vibration-resistant casters to overcome small obstacles.

Safety — Lockable wheels, bumpers, rolled drawer edges, radiused corners and fully welded designs keep you and your shop damage-free.

HEAVY DUTY SOLUTIONS FOR ANY SIZE JOB.

From the basic two-tray cart to the EPIQ *SideKIQ,* Snap-on and Blue-Point® carts have you covered.

EPIQ *SideKIQ* — The ultimate high-capacity mobile unit has a lid that can hold up to 500 lb.

Lock-n-Roll® or InPulse™ Drawers — *Snap-on* carts feature high-capacity drawers that hold more tools and will not drift open. Drawer slides can be added to double drawer capacity.

Lid Selection — Many of *Snap-on's* larger carts allow you to choose from traditional, sliding stainless, or bed liner-coated lids to meet any and every need.

KRSC100A Series Mobile WorkStations

Cubic Inches (cm³)	Square Inches (cm²)		Net Weight, lb (kg)		Load Capacity, lb (kg)
7,943 (130,162)	2,362 (15,238)		320 (145)		2,000 (907)
	Drawers	Width, inches (mm)	Depth, inches (mm)		Height, inches (mm)
Specifications	2	38 (965)	26 (660)		43 5/16 (1,100)
Drawers	1	30 1/16 (768)	24 (609)		6 3/16 (157)
	1	30 1/16 (768)	24 (609)		3 15/16 (100)
Bottom Tray	1	35 (889)	26 (660)		3/4 (19)

KRSC100A Series Mobile WorkStations

- Each unit holds 1 ton (2,000 lb), fully welded body
- 8" semi-soft swivel-lock casters, extra heavy duty weight capacity will go over obstacles that stop ordinary carts
- Optional convenience drawer large enough for short-term storage of work-in-progress parts
- 1,000 lb capacity, 38" x 26" top work surface (stainless-steel) has raised edge all the way around
- 4" and 6" InPulse™ drawers retain up to 20x the weight of standard detents without drifting open
- Vertical bumper system with soft edges
- Large diameter handle with stainless-steel grip

KRSC100APBO

Colors Available

Red	Gloss Black	Royal Blue	Midnight Blue	Ultra Yellow	Extreme Green	Electric Orange	Arctic Silver	Flat Black w/Blk Trim
PBO	PC	PCM	PDG	PES	PJJ	PJK	PKS	POT

KRSC100A Optional Accessories

Stock No.	Description
100W16S	6" optional (non-locking) bottom convenience drawer for KRSC100A (Add proper color suffix)
KASR12APV	Screwdriver rack
KAT12APV	12" Can holder
KAPR24PVB	Pry bar rack
KAS12PWRPV	Power tool rack (Holds 3 power tools)
KAHK63	6" Extended hook
KAHCK33	3" Curved hook
KAHLK33	3" Loop
KALS15	Laptop shelf 15"

ROLL CARTS

KEMN361A Series SideKIQ EPIQ Roll Cart

Cubic Inches (cm³)	Square Inches (cm²)		Net Weight, lb (kg)		Load Capacity, lb (kg)	
26,023 (426,644)	6,004 (37,735)		498 (227)		2,000 (907)	
	Width		Depth		Height	
Drawers	inches	mm	inches	mm	inches	mm
2	30 1/16	764	27 1/2	699	1 11/16	43
3	30 1/16	764	27 1/2	699	3 15/16	100
1	30 1/16	764	27 1/2	699	6 3/16	157
Top Compartment	36	914	29	717	8	203
Overall	37	940	30	762	48 3/8	1229
Six Total Drawers						

KEMN361A Series Roll Carts

- 37" inches wide and 30" inches deep – super capacity in a maneuverable footprint
- Same 48" height as EPIQ Roll Cab
- 8" deep top compartment for large pry bars, chargers, diagnostics, etc.
- Four 7" ISO-Ride® casters all swivel – or they can be locked into rigid position when desired
- *ISO-Ride* torsion puck system
- Casters are designed to carry 2,000 lb each
- *InPulse* drawer retention system
- Six heavy duty drawers hold 227 lb per drawer
- Radiused trim and inset drawers – no sharp corners

KEMN361APBO

Colors Available

Red	Gloss Black	Royal Blue	Midnight Blue	Ultra Yellow	Candy Apple Red	Extreme Green	Electric Orange	Arctic Silver	Flat Black Blk Trim	White	Flat Blue Blk Trim
PBO	PC	PCM	PDG	PES	PJH	PJJ	PJK	PKS	POT	PU	PWL

- Do not open multiple drawers
- Images may be shown without actual warning labels
- Read safety precautions on pages W1 to W4

MOBILE SOLUTIONS: ROLL CARTS

KRSC246PCM1

KRSC246PDO7

Colors Available

	Red	Gloss Black	Royal Blue	Midnight Blue	Ultra Yellow	Extreme Green	Electric Orange	Flat Black w/Blk Trim
Stainless:	PBO1	PC1	PCM1	PDG1	PES1	PJJ1	PJK1	POT1
Bed Liner:	PN7	PFI7	PET7	PQD7	PDO7	PKG7	PKH7	POT7

KRSC46GPES

Colors Available

Red	Gloss Black	Royal Blue	Ultra Yellow	Candy Apple Red	Extreme Green	Electric Orange	Midnight Blue	Flat Black w/Blk Trim
PBO	PC	PCM	PES	PJH	PJJ	PJK	PDG	POT

KRSC246 Series Roll Carts

Specifications	KRSC246 Series
Cubic Inches (cm³)	21,979 (360,171)
Square Inches (cm²)	4,880 (31,483)
Width, inches (mm)	36 (914)
Height, inches (mm)	46 (1,168)
Depth, inches (mm)	24 (610)
Load Capacity, lb (kg)	2,400 (1,089)
Lid Capacity, lb (kg)	150 (68)
Drawers	6
Casters	6" x 2"
Net Weight, lb (kg)	318 (144)
Shipping Weight, lb (kg)	373 (172)

KRSC246 Series Roll Carts

- Unit is 24" deep for the most storage capacity
- Lockable top section is 7" deep, allowing you to lock up work in process
- Top section also provides openings to vertically store pry bars and extensions up to 36" (914 mm) long
- Welded cart body yields lasting strength
- Choose from two durable flip-lid materials: stainless-steel or truck bed liner
- Bumpers have a hard interior yet a soft exterior to reduce damage to other objects
- Six drawers: two 2" deep; two 4" deep; and two 6" deep
- Four monoprene casters for better maneuverability and less vibration

KRSC46G Series Roll Cart

Cubic Inches (cm³)	Square Inches (cm²)	Net Weight, lb (kg)	Load Capacity, lb (kg)
20,783 (340,572)	4,392 (28,335)	265 (120)	2400 (1089)

	Drawers	Width, inches (mm)	Depth, inches (mm)	Height, inches (mm)
Specifications	6	40 (1,029)	20 (508)	46 (1,168)
Drawers	5	34 3/4 (882)	17 1/2 (444)	3 5/8 (92)
	1	34 3/4 (882)	17 1/2 (444)	7 5/8 (193)
Top Compartment	—	39 13/16 (1,011)	18 13/16 (478)	7 (178)

KRSC46G Series Roll Carts

- The one-piece fully welded body is designed for maximum strength
- Inherent strength for storage capacity found only in the best tool storage cabinets
- Switch out one of the 4" drawers and the 8" drawer and add a 12" drawer
- 7" top compartment uses nonslip liner internally to accommodate heavy tools and parts
- Top compartment will also store battery charger and can be used as a charging station while locked
- Drawers are 36" wide. Drawer capacity: 100 lb per drawer; up to 200 lb with double slide
- Stronger lock and cam – round key lock for interchangeability and larger cam for security
- Accessory panels can be added to both sides providing slot pattern for accessories, and accommodates KAPS4 Power Strip and 6007K0120PV Cord Wrap with no extra drilling
- Also accommodates the KRA4830 End Cab (KRSC404APV adaptor panel required)
- Snap-on® paint and steel standards using the same paint and steel as *Snap-on* toolboxes
- *Snap-on* KRA-with LOCK 'N ROLL® drawers will not drift open when rolling
- *Snap-on* Warranty – the *Snap-on* lifetime warranty on all parts
- Thoroughly tested with rigorous bump track testing has proven the *Snap-on* cart lasts longer
- Optional JKRR46GW55 – Rubber Top Mat (not included)

KRSC43 Series Roll Carts

Specifications	KRSC43 Series
Cubic Inches (cm³)	20,783 (340,572)
Square Inches (cm²)	4,392 (28,335)
Width, inches (mm)	40 (1,016)
Height, inches (mm)	46 (1,168)
Depth, inches (mm)	20 (508)
Load Capacity, lb (kg)	2,400 (1,089)
Lid Capacity, lb (kg)	120 (54) each side
Drawers	6
Casters	6" x 2"
Net Weight, lb (kg)	262 (112)
Shipping Weight, lb (kg)	312 (135)

KRSC43PJJ

KRSC43 Series Roll Carts

- Features a split top that slides out from the center to provide total access to a generous 7" deep top compartment
- Cart body is entirely welded double-wall design, not bolted, for lasting strength – spot welds 3"–4" apart
- Rolled edges and a rear flange on drawers provide a solid feel to drawers under load
- Two shot-molded rubber/nylon corner bumpers protect nearby objects and provide long-lasting brand identification and professional appearance
- Full-length two-point locking lid and separate manual rear lock rod for drawers – more secure than single-point lock used by many other manufacturers

Colors Available

	Red	Gloss Black	Royal Blue	Ultra Yellow	Candy Apple Red	Extreme Green	Electric Orange	Midnight Blue	Flat Black w/Blk Trim
Stainless:	PBO1	PC1	PCM1	PES1	PJH1	PJJ1	PJK1	PDG1	POT1
Bed Liner:	PN7	PF17	PET7	PDO7	PPS7	PKG7	PKH7	PQD7	POT7

KRSC46G & KRSC43 Series Roll Cart Accessories

- Create the ultimate shop cart
- Easier to customize than any shop cart in the industry

Stock No.	Description
KAPR17	Prybar Rack (available in nine colors)
KRA412F*	Folding side shelf
KRA4830F*	End cab. Comes equipped with adjustable shelves; optional drawers can also be added
KACSC40PC	Protective nylon cover (black 200 Denier® nylon)
KRSC404APV	Accessory mounting/adaptor panel; also used to mount end cab
6007K0120PV*	Cord wrap
KAS12APV*	12" flat shelf
KAT12APV*	12" can rack: 12" wide, 3" deep
KEWLEDFLEXL	Rechargeable LED flexible long neck work light (magnetic base)

*Requires KRSC404APV adaptor panel

KRSC326F Series Compact Roll Cart

Cubic Inches (cm³)	Square Inches (cm²)		Net Weight, lb (kg)	Load Capacity, lb (kg)
16,847 (276,073)	3,533 (22,794)		157 (71.2)	1,200 (544)
	Drawers	Width, inches (mm)	Depth, inches (mm)	Height, inches (mm)
Specifications	6	32 11/16 (830)	20 1/2 (520)	43 (1,092)
Drawers	5	27 1/8 (689)	17 1/2 (445)	3 5/8 (92)
	1	27 1/8 (689)	17 1/2 (445)	7 5/8 (193)
Top Compartment	—	32 (812)	18 13/16 (478)	6 11/16 (170)

KRSC326F Roll Cart

- Similar features to KRSC46G
- More compact width and four swivel casters

Colors Available

	Red	Gloss Black	Royal Blue	Midnight Blue	Ultra Yellow	Candy Apple Red	Extreme Green	Electric Orange	Flat Black w/Blk Trim
	PBO	PC	PCM	PDG	PES	PJH	PJJ	PJK	POT

KRSC326FPBO

⚠WARNING

- Do not open multiple drawers
- Images may be shown without actual warning labels
- Read safety precautions on pages W1 to W4

MOBILE SOLUTIONS: ROLL CARTS

KRSC33APC

KRSC33A Series Roll Carts

Cubic Inches (cm³)	Square Inches (cm²)		Net Weight, lb (kg)	Load Capacity, lb (kg)
9,591 (157,168)	2,110 (13,613)		157 (71.2)	600 (272)
	Drawers	Width, inches (mm)	Depth, inches (mm)	Height, inches (mm)
Specifications	3	32 9/16 (827.1)	20 1/2 (520.7)	43 5/16 (1,100)
Top Compartment	—	32 (812.8)	19 1/8 (485.8)	6 1/2 (165.1)

KRSC33A Series Roll Carts
- Entirely welded body and legs for super strength versus bolt-together units
- 27" locking drawers
- Large top compartment
- 5" x 2" swivel casters, factory installed
- Factory assembled, welded tray and leg assembly
- Slots 'N Dots™ side panels for mounting accessories

KRSC312FPV Optional Side Shelf, Textured Black

Colors Available

Red	Gloss Black	Royal Blue	Midnight Blue	Ultra Yellow	Candy Apple Red	Extreme Green	Electric Orange	Flat Black w/Blk Trim
PBO	PC	PCM	PDG	PES	PJH	PJJ	PJK	POT

KRBC60T

KRBC60T Welding WorkStation Cart

Cubic Inches (cm³)	Square Inches (cm²)		Net Weight, lb (kg)	Load Capacity, lb (kg)
19,804	1,949		295 lb	1,000 (453)
	Drawers	Width, inches (mm)	Depth, inches (mm)	Height, inches (mm)
Specifications	3	50 3/4 (1,289)	25 3/4 (654)	37 1/2 (352)
Top Compartment	—	26 (660.4)	19 1/8 (485.8)	6 1/2 (165.1)

KRBC60T Welding WorkStation Cart
- 3/8" plate steel work surface
- Four dual-purpose mounting locations serve as accessory mount and wand holder
- HD textured black matte finish
- Large locking compartment stores two welders
- *Slots 'N Dots* rear panel accommodates many accessories
- Three drawers with liners and high quality roller bearing slides
- Three large cord hooks included – extra hook kits available

KRP1HD

KRP1HD Polymer Roll Cart

	Net Weight, lb (kg)		Load Capacity, lb (kg)	
	37 (16.8)		320 (145)	
	Drawers	Width, inches (mm)	Depth, inches (mm)	Height, inches (mm)
Specifications	1	43 (1,092)	21 3/4 (552)	38 1/2 (978)
Top Tray	1	43 (1,092)	21 3/4 (552)	3 3/16 (80.9)
Bottom Tray	1	43 (1,092)	21 3/4 (552)	2 13/16 (71.4)

KRP1HD Polymer Roll Cart
- Heavy duty polymer construction will not scratch painted surfaces, will not corrode and is non-conductive
- Top slides in either direction to reveal storage compartment and work surface underneath
- Built-in tool holders in handles accept wide variety of screwdrivers, small prybars, pliers and other small to medium hand tools
- Drain plugs in both upper and lower trays facilitate cleanup
- Red trays with gray lid and legs
- Locking swivel casters
- Each tray has 160 lb (73 kg) load capacity

KRA6200F/KRA6210F Series Road Chest

Cubic Inches (cm³)	Square Inches (cm²)	Net Weight, lb (kg)	Shipping Weight, lb (kg)
11,937 (195,612)	3,460 (22,323)	282 (128)*	325 (147)*

	Drawers	Width, inches (mm)	Depth, inches (mm)	Height, inches (mm)
Specifications	4	36 (914)	24 (610)	24 (610)
Drawers	2	30 1/2 (775)	21 3/4 (552)	1 3/4 (44)
	2	30 1/2 (775)	21 3/4 (552)	3 5/8 (92)
Top Compartment	—	34 7/8 (885)	22 1/2 (571)	5 1/2 (139)

*Add 25 lb for cage on KRA6200F

KRA6200F/KRA6210F Series Road Chest

- Wider side walls with added corner gussets to keep corners square
- Three stiffeners behind front cover with inside padding: strengthens cover and protects drawers
- Cover and front are hinged together for quick and easy access to all tools
- Overlap on lid allows water to flow past without entering the front section
- Handles on KRA6210F Series provide easier lifting (Handle 8 – 3533, add color suffix)
- Three friction hinges keep the front cover from slamming

KRA6200FPBO

KRA6210FPBO

Optional Waterproof Covers

KRA6200	KAC6200 (Red)	KAC6200PC (Black)
KRA6210	KAC6210 (Red)	KAC6210PC (Black)

KADDS2404 – Optional 4" steel drawer divider set
KADDS2402 – Optional 2" steel drawer divider set

Colors Available

KRA60B Series Heavy Duty Road Chests

Specifications	KRA60B Series
Cubic Inches (cm³)	5,343 (87,556)
Square Inches (cm²)	1,939 (12,509)
Width, inches (mm)	26 (660)
Height, inches (mm)	19 5/16 (491)
Depth, inches (mm)	16 7/8 (428)
Load Capacity, lb (kg)	500 (220)
Drawers	8
Net Weight, lb (kg)	120 (54)
Shipping Weight, lb (kg)	155 (70)

KRA60B Series Heavy Duty Road Chests

- Deeper drawers, over 15" front to back, holds more tools required for service
- 5" deep narrow drawer and 5" deep top compartment holds power tools and deep sockets
- Friction-style drawer slides for optimal use in dusty, gritty environments
- Protective cover and drop front for quick access to top compartment and drawers
- Lid (cover/front) is rigid enough for repeated heavy use and keeps its shape due to a unique full length lid stiffener, which is welded to the sides for optimal rigidity
- The front section of the cover contains a backing plate to reduce flex
- Safety lock on cover keeps cover in position when open
- Two full-length piano hinges help to position the cover with little effort
- Class 1 heavy gauge steel is used throughout – spot welds 3"–4" apart
- Full width double-wall construction supports loaded drawers
- Rolled edges and a rear flange on drawers provide a solid feel to drawers under load
- Plastic bumper tops for quiet closing and protection
- Full length, two-point lock rod secures both sides – more secure than single point lock used by many other manufacturers

KRC20 Nylon Cover

- Protective nylon cover for KRA60B Series Heavy Duty road chests

KRA60BPCM

Colors Available



WARNING

- Do not open multiple drawers
- Images may be shown without actual warning labels
- Read safety precautions on pages W1 to W4

MOBILE SOLUTIONS: ROAD CHEST

KRA62D

KRA62D Heavy Duty Road Chest

Cubic Inches (cm³)	Square Inches (cm²)	Net Weight, lb (kg)	Load Capacity, lb (kg)
8,187 (134,160)	3,108 (20,050)	178 (81)	450 (204)

	Drawers	Width, inches (mm)	Depth, inches (mm)	Height, inches (mm)
Specifications	10	31 3/32 (789.8)	20 5/16 (515.9))	21 7/32 (539)
Top Compartment	—	26 (660.4)	19 1/8 (485.8)	6 1/2 (165.1)

Colors Available



MOBILE TOOL CHEST

KMC18043NOR

KMC18A062NTN

All Weather Mobile Tool Chest

- 22.1" wheel base on the wide corners for stability
- Innovative four-bar latch system for secure lid closure
- Telescoping handle with higher reach
- Over top hinged lid can be used as a seat when case is closed
- Drawers fully extend on Snap-on® proprietary composite slides
- Usable space interior dimensions: 21.2" W x 11.9" D x 15.4" H
- 4,130 cubic inches of internal space
- Heavy duty butterfly hinges
- Auto pressure equalization valve
- Large side handles that may be gripped with two hands
- Configurable drawers; interchangeable with other mobile tool chests
- Heavy duty roll cage ribs; durable, shock-resistant material
- Stackable design even when fully loaded
- *Snap-on* padlock holder with 250 lb of break-in resistance
- Water resistant when submerged to one meter
- Case material made with Zerust® corrosion inhibitor to help prevent tools from rusting
- Net weight 44 lb (20 kg)

	Drawers	Color
KMC18043NBK	7	Black
KMC18043NGR	7	Green
KMC18043NOR	7	Orange
KMC18043NTN	7	Tan
KMC18062NBK	8	Black
KMC18062NGR	8	Green
KMC18062NOR	8	Orange
KMC18062NTN	8	Tan

Optional Accessories:

TCK18043BR Tool Control Kit. For seven-drawer units only.

JIKMC18-7NS Nonslip Drawer Liner Kit. For seven-drawer units only.

TB50W

Soft-Sided Tool Bag with Wheels and a Telescoping Handle

TB50W Soft-Sided Tool Bag

- Multiple pockets inside and outside, to store a multitude of smaller items
- Large gate mouth opening to store larger items and for easy access
- Made of durable 1680 Denier® oxford nylon fabric, for strength and durability
- Telescoping handle with wheels, to roll rather than carry the bag
- Dimensions – 20" W x 12" H x 12" D

Aviation Dog Boxes

Aviation technicians told us what they need. And we listened. Snap-on® is excited to introduce this new line of rolling toolboxes with convenient hand-tow handles. Available in three sizes, these dog boxes let you load up the tools you need for a specific task and comfortably wheel them across the tarmac, from hangar to hangar, through the terminal or on a plane.

Interchangeable Handles
- Small and medium dog boxes feature an interchangeable hard steel wagon-style handle that keeps the box from wandering or nipping at your heels, or a soft nylon leash so you can choose the hand-tow handle that best fits your needs
- Handles can be quickly installed or changed with the wire lock pin

Deluxe Wagon-Style Handle
- The large dog boxes feature a deluxe hard steel wagon-style handle that is easy to steer and easy to control
- The swivel feature allows for a comfortable pulling position while the spring-loaded action keeps the handle in the upright position when the box is at rest

Hinged And Foldable Top
- Both large dog boxes feature a front lid that folds up and under the top lid to create a convenient, flat work surface, while still allowing access to the drawers
- When fully closed, the hinged cover lets you keep the drawers and box securely locked

Removable Chassis
- Each dog box can be removed from the rolling chassis with convenient lifting handles to allow for stationary storage on a bench or roll cab for easy accessibility

Rubber Wheels
- All models feature rubber caster wheels for a smooth and quiet ride along with maximum shock absorption
- Wheels can also be locked for safety

Specification	KRDB265	KRDB269	KRDB18	KRDB24
Brand	*Snap-on*	*Snap-on*	Blue-Point®	*Blue-Point*
Description	Dog Box Large, 5-Drawer Wheeled Tool Box	Dog Box Large, 9-Drawer Wheeled Tool Box	Dog Box Small, Wheeled Tool Box	Dog Box Medium, Wheeled Tool Box
Storage Space (Cubic Inches)	4,452	4,288	1,530	2,540
Storage Space (Square Inches)	1,814	1,753	525	670
Number of Trays	—	—	4	4
Number of Drawers	5 full length	3 full length 6 compartment	—	—
Cantilever, Split-Top Opening	—	—	Yes	Yes
Flat Work Top	Yes	Yes	—	—
Pull Handle*	Deluxe hard steel wagon handle with soft grip	Deluxe hard steel wagon handle with soft grip	Interchangeable hard steel wagon handle or soft nylon leash	Interchangeable hard steel wagon handle or soft nylon leash
Carrying Handle	No	No	Yes	Yes
Rubber Wheels	Yes	Yes	Yes	Yes
Removable Chassis	Yes	Yes	Yes	Yes
Length, inches (mm)	26 (660)	26 (660)	18 (457)	24 (610)
Width, inches (mm)	14 3/4 (375)	14 3/4 (375)	10 (254)	12 (305)
Height, inches (mm)	17 1/4 (438)	17 1/4 (438)	13 1/4 (349)	12 (305)
Weight, lb (kg)	103 (47)	103 (47)	32 (14)	55 (25)

*Designed to be pulled by hand

Already own a *Snap-on* toolbox? Add a rolling chassis to create your own dog box.
DB18CHASSIS: 18" Chassis with interchangeable hard and soft handles
DB24CHASSIS: 24" Chassis with interchangeable hard and soft handles
DB26CHASSIS: 26" Chassis hard handle only

⚠WARNING

- Do not open multiple drawers
- Images may be shown without actual warning labels
- Read safety precautions on pages W1 to W4

MOBILE SOLUTIONS: ROLL CARTS Blue-Point®

KRBC50TPC

KRBC50T Series Roll Carts

Specifications	KRBC50T Series
Cubic Inches (cm³)	17,935 (293,902)
Square Inches (cm²)	7,878 (50,826)
Width, inches (mm)	36 (965)
Height, inches (mm)	42 (1,071)
Depth, inches (mm)	22.4 (569)
Load Capacity, lb (kg)	705 (319)
Drawers	5
Casters	6" x 2"
Net Weight, lb (kg)	180 (81.6)
Shipping Weight, lb (kg)	216 (98)

KRBC50T Series Roll Carts

- New cart locking system for theft protection
- Heavy duty cart push handle
- Roll-off pallet design for easy customer delivery
- 6" x 2" heavy duty casters (brakes on two of the casters)
- Rugged one-piece bumper guards
- Retractable side work table
- Longer drawer handles
- Can holder
- Prybar and tool holders on each side of cart

Colors Available

Red	Gloss Black	Royal Blue	Extreme Green	White
	PC	PCM	PJJ	PU

KRBC30TBPCM

KRBC30TB Series Roll Carts

Cubic Inches (cm³)	Square Inches (cm²)		Net Weight, lb (kg)	Load Capacity, lb (kg)
11,050	2,153 (13,890)		180 (81.5)	800 (362)
	Drawers	Width, inches (mm)	Depth, inches (mm)	Height, inches (mm)
Specifications	4	35 (889)	21 (533)	41 1/4 (1,048)
Top Compartment	—	24 (610)	20"	6"

KRBC30TB Series Roll Carts

- Portable 20' electrical cord reel with four outlets and circuit breakers
- Adjustable personal organizer tray in top compartment (3" deep x 24" wide x 1.5" high)
- One-piece rubber bumper for each leg (already installed)
- Bottom corner bump blocks for extra corner protection
- Sturdy, spacious bottom drawer with two sets of drawer slides
- Larger pull handles for easy drawer opening
- Heavy duty padded handle
- Removable garbage can
- Sturdy side work table
- Removable spray can holder
- Comes with casters assembled on cart

Colors Available

Red	Gloss Black	Royal Blue
	PC	PCM

KRBC10TBPC

Colors Available

Red	Gloss Black	Royal Blue	Ultra Yellowr	Extreme Green	Deep Cranberry	White
	PC	PCM	PES	PJJ	PM	PU

KRBC10TB Series Roll Carts

	Cubic inches (cm³)	Square inches (cm²)	Load Capacity, lb (kg)
	7,428 (121,700)	2,400 (15,480)	540 (245)
	Drawers	Width, inches (mm)	Depth, inches (mm)	Height, inches (mm)
Specifications	4	30 1/2 (775)	20 1/2 (520)	41 1/4 (1,048)
Drawers	2	11 1/2 (292)	17 1/2 (444)	2 1/2 (63.5)
	1	24 1/2 (622)	17 1/2 (444)	2 1/2 (63.5)
	1	24 1/2 (622)	17 1/2 (444)	2 1/2 (63.5)
Bottom Shelf	2	30 (762)	19 (482)	3 1/2 (88.9)
Top Compartment	—	30 (762)	19 (482)	2 1/2 (63.5)
External Tray (rear)	—	15 3/8 (390)	4 (101)	3 3/8 (85.9)
External Tray (front)	—	15 3/8 (390)	4 (101)	2 (50.8)

BPNCVR10T Roll Cart Cover. Fits all KRBC10T, KRBC9T and KRBC30T series roll carts. Protects cart from dirty shop conditions. High quality 210 Denier® nylon. Sturdy zipper makes using the cover quick and easy. Waterproof and durable.

KRBC10TB Series Roll Carts

- Plated fasteners resist corrosion and self-locking nuts assure a rigid, secure assembly
- Locking support tabs add strength, increase load capacity and facilitate quick assembly
- Made from heavy gauge steel for superior strength
- Retractable side work table
- Protective rubber bumpers
- Comes with casters assembled

KRBCSST Series Roll Carts

- Padded lid protects finish and provides additional work surface
- Roller bearing slide drawers, locking slide top and internal prybar holder
- Dual locking casters keep cart in place during use
- Convenient storage trays on both sides

Cubic Inches (cm^3)	Square Inches (cm^2)	Net Weight, lb (kg)	Load Capacity, lb (kg)
15,931 (261,062)	1,618 (26,514)	23.5 (56)	300 (136)

	Drawers	Width, inches (mm)	Depth, inches (mm)	Height, inches (mm)
Specifications	2	29 7/16 (747)	20 5/8 (524)	38 11/16 (982)
Top Compartment	—	29 7/16 (747)	20 5/8 (524)	6 13/16 (171)
Drawers	2	29 5/16 (744)	17 1/2 (444)	2 3/4 (69)
Bottom Compartment		29 5/16 (744)	17 1/2 (444)	3 (75.9)

BPNCVRSST Roll Cart Cover Fits all KRBCSST series roll carts. Protects cart from dirty shop conditions. High quality 210 Denier® nylon. Sturdy zipper makes using the cover quick and easy. Waterproof and durable.

KRBCSST

Colors Available

Red	Gloss Black	Royal Blue	Ultra Yellow
	PC	PCM	PES

KRBC7TD Series Roll Carts

- 4" zinc-plated casters (two locking, two swivel)
- Six liners on drawer and tray, and one rubber mat for side work shelf
- Latch system to unlock all four drawers once the top lid has been opened with a key
- Gas springs on lid for greater control
- Folding side work shelf provides extra work space
- Locking flip-top lid with full length piano hinge
- Locking prybar compartment securely holds all length prybars and screwdrivers

	Net Weight, lb (kg)		Load Capacity, lb (kg)	
	112.2 (50.8)		300 (136)	
	Drawers	**Width, inches (mm)**	**Depth, inches (mm)**	**Height, inches (mm)**
Specifications	4	35 (889)	17 (431)	41 (1,041)
Drawers	2	13 13/16 (350)	15 3/8 (398)	2 (50.8)
	1	27 9/16 (700)	15 7/16 (391)	2 (50.8)
	1	27 9/16 (700)	15 7/16 (391)	4 (101)
Bottom Shelf	1	27 9/16 (700)	15 7/16 (391)	3 (76.2)

KRBC7TDPCM

Colors Available

Red	Gloss Black	Royal Blue	Ultra Yellow	Extreme Green	Electric Orange
	PC	PCM	PES	PJJ	PJK

⚠WARNING

- Do not open multiple drawers
- Images may be shown without actual warning labels
- Read safety precautions on pages W1 to W4

MOBILE SOLUTIONS ROLL CARTS Blue-Point®

KRBC2TC

Colors Available

Red — PC
Gloss Black — PC
Royal Blue — PCM

KRBC2TC Series Roll Cart

- Rugged, general duty dual shelf roll cart
- Trays feature rolled edges for improved strength and rigidity
- Maximum load capacity 150 lb (68 kg) per tray
- Casters are 4" x 1 1/8" (two locking, two standard)

	Net Weight, lb (kg)		Load Capacity, lb (kg)	
	38 (17.2)		300 (136)	
	Drawers	Width, inches (mm)	Depth, inches (mm)	Height, inches (mm)
Specifications	—	30 (756)	17 (428)	36 1/4 (920)
Trays	2	30 (756)	17 (428)	3 (75)

KRBC3TD-1 Locking Drawer. Optional add-on locking drawer for KRBC2TC.

350ABMF09 Replacement Add-On Tray. For KRBC2TC/KRBC3TD.

KRBC3TDPC

Colors Available

Red — PC
Gloss Black — PC
Royal Blue — PCM

KRBC3TD Roll Cart

- Features locking drawer with tubular lock for added tool security
- Two sturdy, 3" deep trays are positioned for convenience
- 150 lb (68 kg) load capacity per tray
- Made of heavy gauge steel
- 4" x 1 1/8" casters (two locking, two standard)

	Net Weight, lb (kg)		Load Capacity, lb (kg)	
	65 (29.4)		300 (136)	
	Drawers	Width, inches (mm)	Depth, inches (mm)	Height, inches (mm)
Specifications	—	30 (762)	17 (428)	36 1/4 (920)
Trays	2	30 (762)	17 (428)	3 (76.2)
Drawer	1	27 (685)	14 1/2 (368)	4 (101)

SERVICE TRAYS

SOSTPC

SOSTPC Automotive Service Tray (Matte Black)

- Leg clearance of 25" allows service tray to slide under hood from the front or side of vehicle
- Height-adjustable support post (36.5"–48.6") allows tray to clear fender or front end on most vehicles
- Removable parts tray and screwdriver holders built into the tray
- Protective bumpers included for the support post
- Maximum load capacity: Tray (125 lb), Drawer (25 lb)
- Large bottom storage basket
- Dimensions (fully assembled): 38" x 28 1/2" x 36 1/2"–48.6" (adj. ht.)

BLPUHST

BLPUHSTPC
(matte black)

BLPUHST Under-Hood Service Tray

- Convenience with less user motion and fatigue
- 24" leg clearance allows the service tray to slide under the hood from the front or the side of vehicle
- Parts dividers and screwdriver holders built in the tray
- Protective bumpers included for top tray and support post
- 3" heavy duty swivel casters
- Height-adjustable support post adjusts from 35 13/16"–48 3/8" for the tray to clear the fender or front end of most vehicles
- EVA pads in all tray compartments
- Dimensions (fully assembled): 29 1/2" L x 26" W x 48 3/8" H
- Maximum load capacity: 75 lb (34 kg)

CUSTOMIZED STORAGE: THAT'S HOW WE ROLL.

Snap-on® tool storage units can be built just the way you like them: customized and personalized to fit your specific needs. Whether you require something practical, or something a little more tailor-made, we've got the storage for you.

Handle-mounted Laptop & Table Holders — Free up workspace, and provide the best keyboard position and viewing angles for your electronic equipment.

Carbon Fiber Drawer Guards — Made from real resin-infused carbon fiber; enhance the appearance while keeping drawer tops clean and protected.

Steel Drawer Guards — Stainless or powder-coated steel guards protect the front corners and drawers of a roll cab. Laser-cut Wrench "S" exposes paint beneath the guard.

Drawer Front — Drawer front covers are made from powder-coated steel and are available in a variety of colors. Cut-out Snap-on logo exposes paint beneath the drawer front.

LED Lights — Automatic WorkCenter lights, switch lights and colored decorative logo panels.

ACCESSORIES: BOXES AND TOTE TRAYS

YA481

YA483

YA486

Plastic Boxes (Blue-Point®)

Ideal for a wide range of storage needs. YA481 through YA486 are made of tough, injection-molded plastic to ensure a precise fitting lid and durability. Top carrying handle, tension latches, tote tray and padlock provision are also featured.

Stock No.	Dimensions, inches
YA481	14 1/2 W x 7 1/4 D x 4 1/2 H
YA482	16 1/2 W x 8 1/4 D x 6 1/2 H
YA483	20 1/4 W x 9 D x 7 3/4 H
YA484	23 1/8 W x 10 1/4 D x 10 1/2 H
YA486	27 1/2 W x 13 3/8 D x 14 H

KRP5CAB

KRP5PB

YA402

Parts Storage Cases

KRP5CAB Five-Drawer Storage Cabinet

- Use to store or inventory small tools and parts
- Black, heavy duty polypropylene cabinet with five removable drawers (KRP5PB)
- Each drawer features a translucent plastic divider system that allows full customization for individual needs
- Drawers are easily removable for transport to job location
- Units can be stacked or wall mounted
- Resistant to common solvents
- Cabinet dimensions are 15 1/2" W x 14 1/2" D x 16" H

KRP5PB Storage Drawer

- Plastic storage drawer for KRP5CAB parts storage cabinet
- Each drawer features 16 translucent section dividers for unlimited customizing options (KRP5PB-16 = 16 Dividers)
- Drawer measures 13 5/8" W x 9 5/8" D x 2 1/4" H

YA402 Parts Storage Case

- Interchangeable partitions allow customizing from 9–24 compartments
- Rugged polypropylene construction
- 14 5/8" W x 10 3/4" D x 2 5/16" H

YA485 Parts Storage Case

- Similar to YA402 except interchangeable partitions can form 8–32 compartments
- 18" x 12" x 3"

Plastic Boxes with Steel Drawers (F.O.D. Design)

- Portable tool chest designed specifically for Foreign Object Damage (F.O.D.) applications
- Accepts both magnetic and foam tool control systems for tool accountability
- 22 gauge steel drawers are interchangeable for custom configurations
- Standard drawer configuration includes four drawers measuring 7 7/8" x 19 9/32" x 1 7/8" and one drawer measuring 7 7/8" x 19 9/32" x 4"
- Molded polymer one-piece design (handle, latches, strap pins, hinges and lock clasp) minimizes potential loose pieces that could cause F.O.D.
- Molded recesses in outer case allow vertical and horizontal stacking
- Padded carrying strap for extra comfort
- 24" W x 10 5/32" D x 17 13/32" H; with capacities of 759 sq in and 1,760 cu in; weight 33 lb (capacity specifications listed are based on standard drawer configuration)

KRP825PCA Portable Tool Chest (F.O.D.)
Gray case and red drawers

KRP825PCC Portable Tool Chest (F.O.D.)
Red case and red drawers

KRP825PCA

KRP825PCC

Tote Trays

KTA3A Metal Tote Tray

- Tubular pull up handle lifts 1 5/8"
- Measures 20 1/4" x 8" x 3 1/4" with handle down

KTA8PV Metal Tote Tray

- Drops in any 14" wide (4" deep) drawers on KRL1000 and KRL700 series tool storage units
- Four non-skid rubber feet protect finished surfaces from scratching
- Raised lips hold tray securely in drawer
- Tubular pull up handle raises 1 3/4"
- Measures 10" W x 14 13/16" L x 3 13/16" H with handle down
- Black textured finish

KRP1001A Plastic Tote Tray

- Made of tough, rust-proof, nonconductive, chemical-resistant polymer
- Includes two deep end pockets
- Bottom drawer is divided into 12 compartments and can be opened from either side
- 16 5/8" x 10 1/4" x 6 7/8"

KTA3A

KTA8PV

KRP1001A

Wall Cabinet

KRA276D Wall Cabinet

- Snap-on® wall cabinets provide both security and inventory control
- Wall cabinet can be mounted to wall, stationary bench or roll cab
- Ruggedly built of heavy gauge steel for durability
- Theft-resistant cylinder locks and a two-point locking system provide protection for your tools
- Features PLEXIGLAS® door panels to permit checking tool inventory without opening doors
- Cabinet measures 33 7/8" x 24 3/4" x 6"

KRA276D

WARNING
• Do not open multiple drawers
• Images may be shown without actual warning labels
• Read safety precautions on pages W1 to W4

ACCESSORIES: METAL BOXES

KRW184B

KRW185

KRA25D



KRW48C

UT22K

KRA21G

KRW182B

KRW183C

KRA24

KRU24B

KRU24GB

Stock No.	Cubic Inches (cm^3)	Square Inches (cm^2)	Dimensions, inches	Description/Features
KRW184B*	1,851 (30,330)	684 (4,413)	Overall: 20 19/32 x 8 1/2 x 14 1/4 Top 3 Drawers: 17 13/16 x 7 5/16 x 2 Bottom Drawer: 17 13/16 x 7 5/16 x 2 1/2	Four drawers lock when lid is closed. Tote tray not included. Net weight 25 lb
KRW185*	2,030 (33,266)	845 (5,452)	20 1/4 x 18 x 8 1/2	Five locking drawers and a top compartment. Drawers lock when lid is shut. Portable: weight empty is 27 lb
KRA25D	1,568 (25,690)	180 (1,161)	20 7/8 x 8 3/4 x 8 3/4	Includes KTA3A Partitioned Tote Tray
KRW48C*	1,530 (25,070)	476 (3,071)	18 x 10 x 13 1/4	Split top opening for tool access. Cantilever trays on either side of cover, carrying handle.
UT22K	1,444 (23,660)	525 (3,837)	Overall: 22 x 8 x 9 4 Small Trays: 22 x 4 x 2	Opens up to expose five storage trays; no trays to lift out, no drawers to open. One Large Tray: 22 x 8 x 9.
KRA21G	996 (16,320)	486 (3,135)	Bottom Drawer: 19 3/4 x 7 3/4 x 2 13/16	Includes KTA3A Partitioned Tote Tray. Net weight: 28 lb
KRW182B*	1,137 (18,630)	—	18 1/2 x 8 1/2 x 9 1/2	Net weight: 12.5 lb Shipping weight: 14.5 lb
KRW183C*	1,637 (26,830)	—	Overall: 20 19/32 x 8 1/2 x 12 Each Drawer: 17 13/16 x 7 5/16 x 2 1/2	Drawers lock when lid is closed. Net weight 20 lb
KRA24	1,155 (18,930)	154 (994)	19 7/8 x 7 3/4 x 7 1/2	Includes partitioned tote tray
KRU24B*	2,540 (41,623)	670 (4,322)	Bottom Section: 23 3/5 x 11 3/5 x 7 1/4	Lightweight, only 27 lb (12.3 kg). Four trays allow organization of smaller items.
KRU24GB*	2,540 (41,623)	670 (4,322)	Bottom Section: 23 3/5 x 11 3/5 x 7 1/4	Lightweight, only 27 lb (12.3 kg). Four trays allow organization of smaller items.

*Blue Point®

TB10A

TB20A

TB30

TB40

TB50

CTTOTEA

CTUTOTE

BPTOTE

Tote Bags

- Rugged, versatile tote bags are constructed from heavy duty 600 x 300 D-polyester
- Water-resistant PVC backing
- Reinforced top hem
- Wide top opening for easy access
- Padded handles and shoulder strap
- Embroidered logos

TB10A Collapsible Tote Bag

- Folds flat for convenient storage using Velcro® with metal snap corner closures
- Multiple interior and exterior pockets
- Fold-down interior bin dividers
- Molded plastic bottom for strength
- Overall dimensions: 18" L x 8" W x 9" D

TB20A Tote Bag

- Multiple interior and exterior pockets
- Removable plastic parts storage bin accessed via lower side storage pocket
- Overall dimensions: 15" L x 10 1/2" W x 12" H

TB30 Tote Bag

- Ultimate small tool organizer
- Multi-organizing pockets
- Heavy duty zippers
- Overall dimensions 13" x 10" x 8"

TB40 Tote Bag

- Lots of cargo space for air tools, etc.
- Heavy duty shoulder strap
- Overall dimensions 17" x 9" x 11"

TB50 Tote Bag

- Multi-pockets inside and out
- Easy grip handle
- Special hard body design
- Overall dimensions 20" x 11" x 9"

CTTOTEA Power Tool Tote Bag

- Wide opening for easy access to tools, extra padding for protection
- Durable 600 Denier® outside for strength
- Interior pockets and compartments for tool organization
- Padded handles for comfortable transport
- Reinforced bottom for strength
- Six external pockets for extra storage
- Approximate inside dimensions, open: 18" L x 8" W x 11 1/2" D

CTUTOTE Power Tool Mini Tote Bag

- Wide opening for easy access to your tools
- Durable 600 *Denier* nylon outside for strength
- Pockets and compartments for tool organization
- Padded handles for comfortable transport
- Reinforced bottom for strength
- Heavy duty industrial zipper
- 12" L x 10" D x 10" W

BPTOTE Tote Bag (Blue-Point®)

- Heavy duty 600 x 300 D polyester
- Water resistant, rugged and versatile
- Wide top opening for easy access
- Multiple interior and external pockets for organization
- Overall dimensions: 16 1/2" L x 10 1/2" W x 12 1/4" H

⚠WARNING

- Do not open multiple drawers
- Images may be shown without actual warning labels
- Read safety precautions on pages W1 to W4

ACCESSORIES: WORK SURFACES

KRSST761B

Stainless-Steel Work Surfaces

Stainless-steel tops turn roll cabs into moveable work benches. Constructed from high grade, 16 gauge 304 stainless-steel. Raised front lip keeps sockets and parts from rolling off. Tops are 1 7/8" thick.

Stock No.	Applications	Width, inches	Depth, inches
KWSN3010AST	KEXN603A EPIQ Roll Cab	120	30
KWSN3012AST	KEXN725A/KEXP725A EPIQ Roll Cabs	144	30
KWSN3030AST	KEBN301A EPIQ End Cabinet	30	30
KWSN3060BST	EPIQ Series Roll Cabs	60	30
KWSN3068BST	EPIQ Series Roll Cabs	68	30
KWSN3076BST	EPIQ Series Roll Cabs	76	30
KWSN3084BST	EPIQ Series Roll Cabs	84	30
KWSP3060BST	PowerTop™ for EPIQ Series Roll Cabs	60	30
KWSP3068BST	*PowerTop* for EPIQ Series Roll Cabs	68	30
KWSP3076BST	*PowerTop* for EPIQ Series Roll Cabs	76	30
KWSP3084BST	*PowerTop* for EPIQ Series Roll Cabs	84	30
KWSH3076BST	PowerHouse™ Top for EPIQ Series Roll Cabs	76	30
KWSH3084BST	*PowerHouse* Top for EPIQ Series Roll Cabs	84	30
KRSST1001B	KRL1022/KRL7022 Roll Cabs	54 3/16	28 15/16
KRSST7003B	KRL1163/KRL1023/KRL1032/KRL1033/KRL7023 Roll Cabs	72 13/16	28 15/16
KRSST7001	KRL1056 Roll Cabs	35 9/16	28 15/16
KRSST761B	KRL722 Roll Cabs	54 3/16	23 7/8
KRSST756	KRL756 Series Roll Cabs	35 9/16	23 7/8
KRSST7011	KRL7011/KRL7015/KRL1011/KRL1015 End Cabs	19 7/8	28 15/16
KRSST711	KRL711/KRL715 End Cabs	19 7/8	23 7/8
KRSST40F	KRA Series 40" Roll Cabs, Square Corner	39 3/4	19 1/2
KRSST4107	KRA Series 40" Roll Cabs with Rounded Corners	39 3/4	19 1/2
KRSST2418	KRA2423/KRA2418/KRA2432/KRA2496 Roll Cabs	73 3/8	23 11/16
KRSST2411	KRA2411/KRA2422 Roll Cabs	54 3/4	23 11/16
KRSST2406	KRA2406/KRA2406A End Cabs	20	23 7/8
KRSST2407	KRA2407 Roll Cabs	35 7/8	23 11/16
KRSST5300	KRA5318/KRA5311 Roll Cabs	53 1/16	19 1/2
KRSST4008	KRA4008/KRA2007 Roll Cabs	26	19 1/2

KRWT7002A

Hardwood Tops

Northern hard maple butcher block tops allow roll cabs to double as full-length workbenches. Tops are 1 3/4" thick.

Stock No.	Applications	Width, inches	Depth, inches
KWSN3010AWT	KEXN603A EPIQ Roll Cab	120	30
KWSN3060AWT	EPIQ Series Roll Cabs	60	30
KWSN3012AWT	KEXN725A/KEXP725A EPIQ Roll Cabs	144	30
KWSN3030AWT	KEBN301A EPIQ End Cabinet	30	30
KWSN3068AWT	EPIQ Series Roll Cabs	68	30
KWSN3076AWT	EPIQ Series Roll Cabs	76	30
KWSN3084AWT	EPIQ Series Roll Cabs	84	30
KRWT7002A	KRL1022/KRL7022 Roll Cabs	53 11/16	27 5/8
KRWT7003A	KRL1023/KRL1032/KRL1033/KRL7023 Roll Cabs	72 5/16	27 5/8
KRWT7001A	KRL1056 Roll Cabs	35 1/8	27 5/8
KRWT761B	KRL722 Roll Cabs	53 3/4	22 9/16
KRWT756A	KRL756 Roll Cabs	35 1/8	22 9/16
KRWT7011A	KRL7011/KRL7015/KTL1011/KRL1015 End Cabs	19 5/16	27 5/8
KRWT711A	KRL711/KRL715 End Cabs	19 5/16	22 5/8
KRWT5000A	KRA5213/KRA5319/KRA2306/KRA2300 Series Roll Cabs (Rounded)	53 1/16	19 7/16
KRWT4800B	KRA4107/KRA4813 Roll Cabs (Rounded)	39 3/4	19 7/16
KRWT2411	KRA2422/KRA2411 Roll Cabs	54 3/4	23 11/16
KRWT2418	KRA2423/KRA2418/KRA2432/KRA2496 Roll Cabs	73 3/8	23 11/16
KRWT2407	KRA2407 Roll Cabs	35 7/8	23 11/16
KRWT26F	KRA4008F/KRA2007F Square Corner	26	19 7/16
KRWT40F	40" Roll Cabs Square Corner	39 3/4	19 7/16
KRWT5300	KRA5318/KRA5311 Roll Cabs (Square)	53 1/16	19 7/16
KRWT4008	KRA4008E/KRA2007 Roll Cabs (Rounded)	26	19 7/16

Steel Work Surfaces

Steel work surface is coated with a substance similar to that used in truck bed liners. Extremely durable, easy to clean, chemical and abrasion resistant, and won't crack or peel. Installation hardware included.

KRBLT1023

Stock No.	Applications	Width, inches	Depth, inches
KRBLT1023	KRL1163, KRL1023, KRL1032, KRL7023, KRL1033	72 13/16	29
KRBLT1022	KRL1022, KRL7022	54 3/16	29
KRBLT722	KRL722	54 3/16	24
KRBLT1011	KRL1011, KRL7011, KRL1015, KRL7015	19 7/8	29
KRBLT711	KRL711, KRL715	19 7/8	24
KRBLT2406	KRA2406/KRA2406A End Cabs	20	23 7/8
KRBLT2418	KRA2423, KRA2432, KRA2496	73 3/8	24
KRBLT756	KRL756	36	24
KRBLT2411	KRA2422/KRA2411	54 3/4	23 11/16
KRBLT5311	KRA5311, KRA5318	53 3/4	19 1/2
KWSN3010ABL	KEXN603A EPIQ Roll Cab	120	30
KWSN3012ABL	KEXN725A/KEXP725A EPIQ Roll Cabs	144	30
KWSN3030ABL	KEBN301A EPIQ End Cabinet	30	30
KWSN3060ABL	EPIQ Series Roll Cabs	60	30
KWSN3068ABL	EPIQ Series Roll Cabs	68	30
KWSN3076ABL	EPIQ Series Roll Cabs	76	30
KWSN3084ABL	EPIQ Series Roll Cabs	84	30
KWSP3060ABL	EPIQ Series Roll Cabs	60	30
KWSP3068ABL	EPIQ Series Roll Cabs	68	30
KWSP3076ABL	EPIQ Series Roll Cabs	76	30
KWSP3084ABL	EPIQ Series Roll Cabs	84	30
KWSH3076ABL	EPIQ Series Roll Cabs	76	30
KWSH3084ABL	EPIQ Series Roll Cabs	84	30

Non-directional Rubber Mats

Non-directional rubber-top mats protect tool storage units from damage. Lightweight, fine textured, all rubber construction. Will not shrink, curl or separate. Cleans easily and quickly. Impervious to most oil and chemicals.

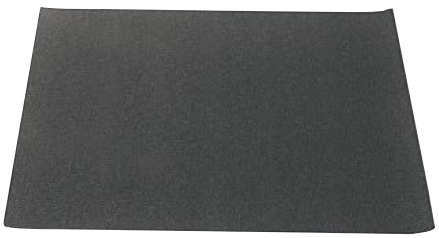

JKRR711CR

Stock No.	Applications
JKRR10011CR	KRL1022/KRL7022 Series Roll Cabs
JKRR1003CR	KRL1023/KRL1032/KRL7023/KRL1033 Series Roll Cabs
JKRR1056CR	KRL1056 Series Roll Cabs
JKRR761CR	KRL722 Series Roll Cabs
JKRR756CR	KRL756 Series Roll Cabs
JKRR1010CR	KRL1011/KRL7011/KRL7015/KRL1015 Series End Cabs
JKRR7012CR	KRL1012/KRL7012/KRLV1012 Series Lockers
JKRR711CR	KRL711 Series End Cabs
JKRR712CR	KRL712 Series Lockers
JKRR3800CR	KRA4107/KRA4800 Series Roll Cabs
JKRR379ACR	KRA4007/KRA3027/KRA3025 Series Roll Cabs
JKRR2411CR	KRA2422/KRA2411 Series Roll Cabs
JKRR2418CR	KRA2423/KRA2418/KRA2432 Series Roll Cabs
JKRR3820CR	KRA4820/KRA4833 End Cabs, KRA5012 Locker
JKRR33W55	KRSC326/KRSC33 Roll Carts
JKRR46GW55	KRSC40/KRSC46 Roll Carts
KWSN3060ACR	EPIQ Series Roll Cabs (60")
KWSN3068ACR	EPIQ Series Roll Cabs (68")
KWSN3076ACR	EPIQ Series Roll Cabs (76")
KWSN3084ACR	EPIQ Series Roll Cabs (84")
KWSN30120ACR	EPIQ KEXN603A Series Roll Cabs (120")
KWSN30144ACR	EPIQ KEXN725A/KEXP725A Series Roll Cabs (144")

⚠WARNING

- Do not open multiple drawers
- Images may be shown without actual warning labels
- Read safety precautions on pages W1 to W4

ACCESSORIES: COVERS

The KAC Series of Storage Unit Covers can be used individually per unit or zipped together with the heavy duty nylon zipper to form a cover to match your tool storage combination. Magnets on the locker and end cab covers hold the door flap open to allow entry to the unit without removing the cover itself. Covers are available for a wide variety of tool storage roll cabs, WorkCenters, Risers and Lockers.

KAC307660BK

KAC1003

KRL7000 Series Covers

Cover Description	Red Stock No.	Black Stock No.
KRL7022 Cover	KAC7002	KAC7002
KRL7022/KRL1201 or KRL1054 Combination Cover	KAC72121	KAC72121PC
KRL7023 Cover	KAC7003	KAC7003PC
KRL7023/KRL1203A or KRL1072 Combination Cover	KAC73123	KAC73123PC
KRL7011A/KRL7015A/KRLV7015 Cover (Left Side)	KAC7011L	KAC7011LPC
KRL7011A/KRL7015A/KRLV7015 Cover (Right Side)	KAC7011R	KAC7011RPC
KRL7012/KRLV7012 Cover (Left Side)	KAC7012L	KAC7012LPC
KRL7012/KRLV7012 Cover (Right Side)	KAC7012R	KAC7012RPC
KRL7022 with KRL7954/KRL5445 Cover	–	KAC702245PC
KRL7023 with KRL7972/KRL7245 (2) Cover	–	KAC702345PC

EPIQ Series Roll Cab Covers

Cover Description	Black Stock No.
KERN60 Cover	KAC304860BK
KERN68 Cover	KAC304868BK
KERP76 Cover	KAC304876BK
KERN84/KERP84 Cover	KAC304884BK
KEXN603 Cover	KAC3048120BK
KEXN725/KEXP725 Cover	KAC3048144BK
60" EPIQ Roll Cab, WorkCenter, 1 Locker	KAC307690BK
68" EPIQ Roll Cab, WorkCenter, 1 Locker	KAC307698BK
76" EPIQ Roll Cab, WorkCenter, 1 Locker	KAC3076106BK
84" EPIQ Roll Cab, WorkCenter, 1 Locker	KAC3076114BK
60" EPIQ Roll Cab, WorkCenter, 2 Lockers	KAC3076120BK
68" EPIQ Roll Cab, WorkCenter, 2 Lockers	KAC3076128BK
76" EPIQ Roll Cab, WorkCenter, 2 Lockers	KAC3076136BK
84" EPIQ Roll Cab, WorkCenter, 2 Lockers	KAC3076144BK
60" EPIQ Roll Cab, WorkCenter, 4 Lockers	KAC3076180BK
68" EPIQ Roll Cab, WorkCenter, 4 Lockers	KAC3076188BK
76" EPIQ Roll Cab, WorkCenter, 4 Lockers	KAC3076196BK
84" EPIQ Roll Cab, WorkCenter, 4 Lockers	KAC3076204BK
60" EPIQ Roll Cab and WorkCenter	KAC307660BK
68" EPIQ Roll Cab and WorkCenter	KAC307668BK
76" EPIQ Roll Cab and WorkCenter	KAC307676BK
84" EPIQ Roll Cab and Workcenter	KAC307684BK
60" EPIQ Roll Cab, WorkCenter, Overheads, 2 Lockers	KAC3097120BK
68" EPIQ Roll Cab, WorkCenter, Overheads, 2 Lockers	KAC3097128BK
76" EPIQ Roll Cab, WorkCenter, Overheads, 2 Lockers	KAC3097136BK
84" EPIQ Roll Cab, WorkCenter, Overheads, 2 Lockers	KAC3097144BK
60" EPIQ Roll Cab, WorkCenter, Overheads, 4 Lockers	KAC3097180BK
68" EPIQ Roll Cab, WorkCenter, Overheads, 4 Lockers	KAC3097188BK
76" EPIQ Roll Cab, WorkCenter, Overheads, 4 Lockers	KAC3097196BK
84" EPIQ Roll Cab, WorkCenter, Overheads, 4 Lockers	KAC3097204BK
60" EPIQ Roll Cab, WorkCenter, Overhead	KAC309760BK
68" EPIQ Roll Cab, WorkCenter, Overhead	KAC309768BK
76" EPIQ Roll Cab, WorkCenter, Overhead	KAC309776BK
84" EPIQ Roll Cab, WorkCenter, Overhead	KAC309784BK

KRL1000 Series Covers

Cover Description	Red Stock No.	Black Stock No.
KRL1065 Cover	KAC1065	KAC1065PC
KRL1022 Cover	KAC1001	KAC1001PC
KRL1022/KRL1201A or KRL1072 Combination Cover	KAC100112	KAC100112PC
KRL1022/KRL1201A/KRL1012A or KRL1072 Combination Cover	KAC1001TL	KAC1001TLPC
KRL1022/KRL7954/KRL5445 Cover	KAC1001WD	KAC1001WDPC
KRL1023/KRL1032/KRL1033 Cover	KAC1003	KAC1003PC
KRL1023 or KRL1032/KRL1203A Combination Cover	KAC13123	KAC13123PC
KRL1023 or KRL1032 with KRL7972/KRL7245 Cover	KAC1003WD	KAC1003WDPC
KRL1056 Cover	KAC1056	KAC1056PC
KRL1056/KRL1251 Combination Cover	KAC161251	KAC161251PC
KRL1011A/KRL1015A Cover (Left Side)	KAC1011L	KAC1011LPC
KRL1011A/KRL1015A Cover (Right Side)	KAC1011R	KAC1011RPC
KRL1012A Cover (Left Side)	KAC1012L	KAC1012LPC
KRL1012A Cover (Right Side)	KAC1012R	KAC1012RPC
KRL1022/KRL7954/KRL5445 Cover	KAC102245PC	–
KRL1023/KRL7954/KRL5445 Cover	KAC102345PC	–
KAC1003TL(xxx) KRL 72" Roll Cab & WorkCenter or Top Chest & Locker Cover		
KAC1001TL(xxx) KRL 54" Roll Cab & WorkCenter or Top Chest & Locker Cover		

Add color suffix PKS=Pink, CAS=Candy Apple, RBS=Royal Blue, EGS=Extreme Green, EOS=Orange

KAC761CAS

KAC761EGS

KAC761EOS

KAC761RBS

Color Logo "S" Cover

Cover Description	Stock No.	Cover Description	Stock No.
KRL722/KRA2411/KRA2422 Cover	KAC761CAS	KRL722/KRA2411/KRA2422 Cover	KAC761PKS
KRA2423 Cover	KAC773CAS	KRA2423 Cover	KAC773PKS
KRL722/KRL791 or KRL722/KRA2454 Combination Cover	KAC761791CAS	KRL722/KRL791 or KRL722/KRA2454 Combination Cover	KAC761791PKS
KRA2423 Roll Cab/KRA2454 Riser Combination Cover	KAC241815CAS	KRA2423 Roll Cab/KRA2454 Riser Combination Cover	KAC241815PKS
KRA2422/KRA2411 Roll Cab/KRA2454 Riser Combination Cover	KAC242210CAS	KRA2422/KRA2411 Roll Cab/KRA2454 Riser Combination Cover	KAC242210PKS
KRL722/KRA2411/KRA2422 Cover	KAC761EGS	KRL722/KRA2411/KRA2422 Cover	KAC761RBS
KRA2423 Cover	KAC773EGS	KRA2423 Cover	KAC773RBS
KRL722/KRL791 or KRL722/KRA2454 Combination Cover	KAC761791EGS	KRL722/KRL791 or KRL722/KRA2454 Combination Cover	KAC761791RBS
KRA2423 Roll Cab/KRA2454 Riser Combination Cover	KAC241815EGS	KRA2423 Roll Cab/KRA2454 Riser Combination Cover	KAC241815RBS
KRA2422/KRA2411 Roll Cab/KRA2454 Riser Combination Cover	KAC242210EGS	KRA2422/KRA2411 Roll Cab/KRA2454 Riser Combination Cover	KAC242210RBS
KRL722/KRA2411/KRA2422 Cover	KAC761EOS	KRL722/KRA2411/KRA2422 Cover	KAC761RDS
KRA2423 Cover	KAC773EOS	KRA2423 Cover	KAC773RDS
KRL722/KRL791 or KRL722/KRA2454 Combination Cover	KAC761791EOS	KRL722/KRL791 or KRL722/KRA2454 Combination Cover	KAC761791RDS
KRA2423 Roll Cab/KRA2454 Riser Combination Cover	KAC241815EOS	KRA2423 Roll Cab/KRA2454 Riser Combination Cover	KAC241815RDS
KRA2422/KRA2411 Roll Cab/KRA2454 Riser Combination Cover	KAC242210EOS	KRA2422/KRA2411 Roll Cab/KRA2454 Riser Combination Cover	KAC242210RDS

Color Stock No. PKS=Pink, CAS=Candy Apple, RBS=Royal Blue, EGS=Extreme Green, RDS=Red, EOS=Orange

KRL700 and Classic Series Storage Unit Covers

Cover Description	Red Stock No.	Black Stock No.	Cover Description	Red Stock No.	Black Stock No.
KRL722/KRA2411 Cover	KAC761	KAC761PC	KRL712 Cover (Left Side)	KAC712L	KAC712LPC
KRL722/KRL791A or KRA2411/KRA2408 Combination Cover	KAC761791	KAC761791PC	KRL712 Cover (Right Side)	KAC712R	KAC712RPC
KRL722/KRA2411/KRW7554/KRWL5435 Cover	KAC761WD	KAC761WDPC	KRA2423/KRA2496/KRA2432 Cover	KAC773	KAC773PC
KRL722/KRL791A/KRL712 Combination Cover	KAC761TL	KAC761TLPC	Classic 73" Roll Cab/Chest Cover	KAC773793	KAC773793PC
KRL756 or KRA2407 Cover	KAC756	KAC756PC	KRA2418/KRA2432/KRA2496 with KRA2472 Cover	KAC773WD	KAC773WDPC
KRL756/KRL751, KRA2407/KRA2404 or Combination Cover	KAC756731	KAC756731PC	Classic 73" Roll Cab/KRA2415 Chest	–	KAC241815PC
KRL711/KRL715 Cover (Left Side)	KAC711L	KAC711LPC	KRL722/KRA2411/KRA2454/KRWL5435 Cover	–	KAC242210PC
KRL711/KRL715 Cover (Right Side)	KAC711R	KAC711RPC	KRA2407 Roll Cab/KRA2405 Chest Cover	–	KAC240705PC
			KRA2418/KRA2432/KRA2496 with KRW7572 Cover	–	KAC773WDPC

Heritage Series Covers

Cover Description	Red Stock No.	Black Stock No.
KRA5000 Series/KRA2300 Series Roll Cab Cover/53" Roll Cabs	KAC5000	KAC5000PC
KRA5000/KRA2300 Series Roll Cab/Top Chest Cover/53" Roll Cab/Top Chest Combination	KAC530015	KAC530015PC
KRA5012 Locker Cover, Left Side	KAC5012L	KAC5012LPC
KRA5012 Locker Cover, Right Side	KAC5012R	KAC5012RPC
KRA4000/2000 Series 40" Roll Cab Cover	KAC4800	KAC4800PC
KRA4000/KRA2000 Series 40" Roll Cab/Top Chest Combination Cover	KAC48004810	KAC480010PC
KRA4000 Series 40" Roll Cab/Drawer Section/Top Chest Combinations	KAC48006010	KAC486010PC
KRA Series End Cabs Cover, Left Side	KAC4820L	KAC4820LPC
KRA Series End Cabs Cover, Right Side	KAC4820R	KAC4820RPC
KRA4008/KRA2007 Roll Cab Cover	KAC4007	KAC4007PC
KRA4000 Series 26" Roll Cab/Top Chest Combination Cover	KAC40074014	KAC40074014PC
KRA4059 Series	KRAC59	–

Other Units

Cover Description	Black Stock No.
KRSC40/KRSC416/KRSC46 Carts	KACSC40APC
KRSC31/KRSC33 Series Roll Carts	KACSC30PC
KRA6200 Road Chest Waterproof	KAC6200PC
KRA6210 Road Chest Waterproof	KAC6210PC

WARNING

• Images may be shown without actual warning labels
• Read safety precautions on pages W1 to W4

ACCESSORIES: DRAWER GUARDS/PROTECTORS/EPIQ SERIES

Protects top of drawers from dings and scratches. Adds a custom, personalized look to tool storage units. Installs easily. No trimming or fasteners required. Simply remove tape from underside of guard, align guard with drawer, snap in place and press firmly. Constructed from stainless-steel with brushed or polished finish. Individual replacement guards are available.

Drawer Guards/EPIQ Series

Brushed Stock No.	Polished Stock No.	Applications
KADGSERN602A	KADGPERN602A	KERN602A Roll Cabs
KADGSERN682A	KADGPERN682A	KERN682A Roll Cabs
KADGSERN762A	KADGPERP762A	KERN762A Roll Cabs
KADGSERP763A	KADGPERP763A	KERP763A Roll Cabs
KADGSERN842A	KADGPERN842A	KERN842A Roll Cabs
KADGSERP842A	KADGPERP842A	KERP842A Roll Cabs
KADGSERN843A	KADGPERN843A	KERN843A Roll Cabs
KADGSERP843A	KADGPERP843A	KERP843A Roll Cabs
KADGSECN602A	KADGPECN602A	KECN602A Top Chests
–	KADGPECN682A	KECN682A Top Chests
–	KADGPECN843A	KECN843A Top Chests
KADGSESN602A	KADGPESN602A	KESN602A Drawer Sections
–	KADGPESN682A	KESN682A Drawer Sections
KADGSESN843A	KADGPESN843A	KESN843A Drawer Sections

Some units also available in Matte Black KADGME-prefix and Titanium Gray i.e., KADGN843AFGY for KERN843.

KADPPERN602A

Protects offset area that angles in on 4" and deeper drawers from scratches.

Drawer Protectors/EPIQ Roll Cabs

Brushed Stock No.	Polished Stock No.	Matte Black Stock No.	Applications
KADPSERN602A	KADPPERN602A	KADPMERN602A	KERN602B Roll Cabs
KADPSERN682A	KADPPERN682A	KADPMERN682A	KERN682B Roll Cabs
KADPSERP763A	KADPPERN843A	KADPMERN843A	KERP763B Roll Cabs
KADPSERN843A	KADPPERP763A	KADPMERP763A	KERN843B Roll Cabs
KADPSERP843A	KADPPERP843A	KADPMERP843A	KERP843B Roll Cabs
KADPSETN682A	KADPPETN682A	KADPMETN682A	KETN682B Roll Cabs
KADPSE12	KADPPE12	KADPME12	12" EPIQ Series Roll Cab Drawers
KADPSE20	KADPPE20	KADPME20	20" EPIQ Series Roll Cab Drawers
KADPSE30	KADPPE30	KADPME30	30" EPIQ Series Roll Cab Drawers
KADPSE38	KADPPE38	KADPME38	38" EPIQ Series Roll Cab Drawers
KADPSE54	KADPPE54	KADPME54	54" EPIQ Series Roll Cab Drawers
KADPSE62	KADPPE62	KADPME62	62" EPIQ Series Roll Cab Drawers

ACCESSORIES: DRAWER GUARDS/KRL SERIES

Stainless-Steel Drawer Guards/KRL Roll Cabs

Brushed Stock No.	Polished Stock No.	Applications
KADG1022	KADGP1022	KRL1022
KADG1023	KADGP1023	KRL1023
KADG1056	KADGP1056	KRL1056, KRL1056B
KADG7022	KADGP7022	KRL7022, KRLP7022, KRL722
KADG7023	KADGP7023	KRL7023
KADG756	KADGP756	KRL756, KRL756B

Gloss Black and Matte Black steel drawer guard sets available for some units.

Stainless-Steel Drawer Guards/KRL Top Chests and End Cabs

Brushed Stock No.	Polished Stock No.	Applications
KADG1011A	KADGP1011A	KRL1011A
KADG1201	KADGP1201	KRL1201, KRL1201A, KRL1202
KADG1203	KADGP1203	KRL1203, KRL1203A, KRL1203B
KADG1221	KADG1221	KRL1221
KADG1232	KADG1232	KRL1232
KADG1251	KADGP1251	KRL1251
KADG7011A	KADGP7011A	KRL1221, KRL711, KRL711A, KRL7011A
KADG731	KADG731	KRL731, KRL751
KADG791	KADGP791	KRL791, KRL791A

KADGSHORT

KADG4107

KRA and KRL Drawer Guards/Individual Replacements

Brushed Stock No.	Polished Stock No.	Applications	Length, inches
KADGNARROW	KADGPNARROW	KRL/Classic Narrow Drawer Guard	16
KADGWIDE	KADGPWIDE	KRL/Classic Wide Drawer Guard	32
KADGXWIDE	KADGPXWIDE	KRL/Classic Extra wide Drawer Guard	50 1/2
KADGSWIDE	KADGPSWIDE	KRL/Heritage Super wide Drawer Guard	69 3/16
KADGSHORT	KADGPSHORT	Heritage Short Drawer Guard	12 1/16
KADGMEDIUM	KADGPMEDIUM	Heritage Medium Drawer Guard	22
KADGLONG	KADGPLONG	Heritage Long Drawer Guard	35 9/16

Use “KADGB” for Gloss Black; “KADGM” for Matte Black.

Drawer Guards/KRA Roll Cabs

Brushed Stock No.	Polished Stock No.	Applications
KADG5311	KADGP5311	KRA5311 Series Roll Cabs
KADG4008	KADGP4008	KRA4008 Series Roll Cabs
KADG4107	KADGP4107	KRA2306/KRA4107 Series Roll Cabs
KADG4813	KADGP4813	KRA4813 Series Roll Cabs
KADG4007	KADGP4007	KRA2007/KRA4007 Series Roll Cabs
KADG2432	KADGP2432	KRA2432 Series Roll Cabs
KADG2418	KADGP2418	KRA2418 Series Roll Cabs
KADG2411	KADGP2411	KRA2411 Series Roll Cabs
KADG2422	KADGP2422	KRA2422 Series Roll Cabs
KADG2496	KADGP2496	KRA2496 Series Roll Cabs

KRA Top Chests and End Cabs

Brushed Stock No.	Polished Stock No.	Applications
KADG5315	KADGP5315	KRA5315 Series Top Chests
KADG5208	KADGP5208	KRA5208 Series Top Chests
KADG4114	KADGP4114	KRA4114 Series Top Chests
KADG4014	KADGP4014	KRA4014 Series Top Chests
KADG4810	KADGP4810	KRA4810 Series Top Chests
KADG4820	KADGP4820	KRA4820 Series End Cabs

WARNING
• Images may be shown without actual warning labels
• Read safety precautions on pages W1 to W4

ACCESSORIES: BODY GUARDS

Made of brushed stainless-steel. Designed to protect the toolbox from solvents and floor cleaning solutions. Custom-fit pieces are adhesively applied. Adds a fresh look to newer tool storage units. Can also be used to complete the restoration of older tool storage units. Bottom guards only. Does not include top guards.

Masters Body Guard Sets

Stock No.	Applications
KABG1022	KRL1022, KRL7022, KRL1001B & KRL7002
KABG1023A	KRL1023, KRL1163, KRL7023, KRL7003
KABG1024	KRL1024
KABG1032A	KRL1032
KABG1032B	KRL1032B, KRL1032C
KABG1033	KRL1033
KABG722	KR722 and KRL761B
KABG1065	KRL1065, KRL7065

EPIQ Body Guard Sets

Stock No.	Applications
KABGSERN602A	KERN602 Series Roll Cabs Brushed
KABGSERN682A	KERN682 Series Brushed
KABGSERN842A	KERN842 Series Brushed
KABGSERN843A	KERN843 Series Brushed
KABGSERP762A	KERP762 Series Brushed
KABGSERP763A	KERP763 Series Brushed
KABGSERP842A	KERP842 Series Brushed
KABGSERP843A	KERP843 Series Brushed
KABGPERN602A	KERN602 Series Polished
KABGPERN682A	KERN682 Series Polished
KABGPERN842A	KERN842 Series Polished
KABGPERN843A	KERN843 Series Polished
KABGPERP762A	KERP762 Series Polished
KABGPERP763A	KERP763 Series Polished
KABGPERP842A	KERP842 Series Polished
KABGPERP843A	KERP843 Series Polished

Bottom guards only. Does not include top guards.

CUSTOMIZATION

KADF32X6

Classic and Masters Stainless-Steel Drawer Fronts

- Brushed and polished stainless-steel drawer fronts for Classic and Masters series roll cabs and top chests
- Fronts for 50" drawers and 32" x 6" drawers feature a precision cut Snap-on® logo in panel that allows the paint color to show through the logo
- Fronts for 16" x 10" deep drawers feature a precision-cut *Snap-on* logo "S" in panel that allows the paint color to show through the logo
- Fronts for 32" x 4" and 16" x 4" drawers do note any logo
- All drawer fronts are applied with double sided 3M® 300LSE tape with flanges and bending tabs to hold them in place

Masters Series Stainless-Steel Drawer Front Sets

Stock No.	Description
KADFKRLSTDA	Brushed Drawer Front Kit, 3pc
KADFPKRLSTDA	Polished Drawer Front Kit, 3pc
KADFP50X5	All Masters Top Drawer: KRA2422 Top Drawer

Brushed Stock No.	Polished Stock No.	Applications
KADF50X4	KADFP50X4	50" drawers on all Classic Series Roll Cabs
KADF32X6	KADFP32X6	32" x 6" drawers on all Masters and Classic Series Roll Cabs
KADF32X4	KADFP32X4	32" x 4" drawers on all Masters and Classic Series Roll Cabs and Top Chests
KADF16X4	KADFP16X4	16" x 4" drawers on all Classic Series Roll Cabs and Top Chests
KADF16X10	KADFP16X10	16" x 10" deep drawers on all Masters and Classic Series Roll Cabs

KADFMBS

Drawer Front, "S", Magnetic

Brushed Stock No.	Polished Stock No.	Applications
KADFMBS	KADFMPS	Magnetic *Snap-on* "S" logo 10" x 6" fits narrow bottom drawers on all KRA & KRL Roll Cabs

Stainless-Steel Drawer Fronts, Heritage Series

- Drawer front guards are available in brushed stainless-steel and polished stainless-steel (polished units contain "P" in part number)
- Each drawer and corner guard is applied with double sided 3M® 300LSE tape and with flanges and/or bending tabs to hold them in place

Brushed Stock No.	Polished Stock No.	Applications
KADF35X8	KADFP35X8	Fits all KRA4107, KRA5311, KRSC46
KADF35X4	KADFP35X4	Fits all KRA4107, Top Chest KRA4114 & KRSC46
KADF22X8	KADFP22X8	Fits all KRA2007, KRA4008, KRA4813 & KRA5319
KADF12X11	KADFP12X11	Fits 12" deep, narrow drawers on all Heritage

KADFP35X4

Carbon Fiber Drawer Fronts (Masters, Classic & Heritage)

Stock No.	Description
KADFC16X10	16" x 10" Classic & Masters Drawer Front
KADFC16X4	16" x 4" Classic & Masters Drawer Front
KADFC32X6	32" x 6" Classic & Masters Drawer Front
KADFC35X8	35" x 8" Heritage Drawer Front
KADFC50X4	50" x 4" Classic & Masters Drawer Front
KADFC50X5	50" x 5" Classic & Masters Drawer Front

KADF35X8

KADFC32X6

Gloss Black Steel Drawer Fronts

- Gloss black drawer fronts are made from powder-coated steel
- Provide a nice contrast to tool storage colors like Flat Black, White, Midnight Blue, Purple and Red
- Laser cut Snap-on® logo reveals paint color

Stock No.	Dimensions, inches	Applications
KADFB12X11	12 x 11	Heritage Series – Deep, Narrow Drawers
KADFB16X10	16 x 10	Heritage Series – Deep, Narrow Drawers
KADFB22X8	22 x 8	Heritage Series – Medium Width Drawers
KADFB32X6	32 x 6	Masters/Classic Series – Wide Drawers
KADFB35X4	35 x 4	Heritage Series and KRSC Series Roll Carts – Deep Drawers
KADFB35X8	35 x 8	Heritage Series and KRSC Series Roll Carts – Deep Drawers
KADFB50X4	50 x 4	Classic Series – Extra Wide Drawers
KADFB50X5	50 x 5	Masters Series – Extra Wide Drawers
KADFB8X11	8 x 11	KRA2318/KRA5318 Series – Bottom Drawer

Carbon Fiber Drawer Guards

	Stock No.	Description
Sets	KACF2411	Carbon Fiber Drawer Guard Set KRA2411
	KACF2418	Carbon Fiber Drawer Guard Set KRA2418
	KACF5311	Carbon Fiber Drawer Guard Set KRA5311
	KACF1022	13pc Drawer Guard Set for KRL1022 Series Roll Cabs
	KACF1023	22pc Drawer Guard Set for KRL1023 Series Roll Cabs
	KACF2423	17pc Drawer Guard Set for KRA2423 Series Roll Cabs
	KACF722	11pc Drawer Guard Set for KRL722 Series Roll Cabs
	KACF4107	7pc Drawer Guard Set for KRA4107 Series Roll Cabs
	KACF4114	4pc Drawer Guard Set for KRA4114 Series Roll Cabs
	KACF46	6pc Carbon Fiber Set for 35" Drawer, KRA Heritage KRSC46/KRSC43
	KACF2410	KRA2410 Top Chest
	KACF2422	Carbon Fiber Drawer Guard Set KRA2422
Individual Replacements	KACFHWIDE	35" Heritage Drawer 1pc
	KACFHXWIDE	49" Heritage Drawer 1pc
	KACFHMED	22" Heritage Drawer 1pc
	KACFHNRW	11" Heritage Drawer 1pc
	KACFCMED	Classic/Masters
	KACFCXWIDE	Classic/Masters
	KACFCNRW	Classic/Masters

KEVLAR®/Carbon Fiber Drawer Guards

	Stock No.	Description
Sets	KACF2411YL	KRA2411 Series Roll Cabs
	KACF1022YL	KRL1022 Series Roll Cabs
	KACF1023YL	KRL1023 Series Roll Cabs
	KACF722YL	KRL722 Series Roll Cabs
	KACF2422YL	KRA2422 Series Roll Cabs
Individual Replacements	KACFCMEDYL	32" Classic/Masters Drawers, 1pc
	KACFCNRWYL	16" Classic/Masters Drawers, 1pc
	KACFCXWIDEYL	50" Classic/Masters Drawers, 1pc
	KACFHMEDYL	22" Heritage Drawer 1pc
	KACFHNRWYL	11" Heritage Drawer 1pc
	KACFHWIDEYL	35" Heritage Drawer 1pc
	KACFHXWIDEYL	Top Drawer Only KRA5311 Roll Cabs, 1pc



KACF2422YL

⚠WARNING

- Do not open multiple drawers
- Images may be shown without actual warning labels
- Read safety precautions on pages W1 to W4

ACCESSORIES: CUSTOMIZATION

KACGP24RC

Stainless-Steel Corner Guards, Classic Series

- Fits all Classic series roll cabs and top chests
- Available in brushed and polished stainless-steel plus Gloss Black and Matte Black coated steel
- Designed to cover the Classic series front edges vertically (top to bottom)
- Custom wrench "S" stamped into top and bottom
- Applied with double sided 3M® 300LSE tape and has a flange on top and bending tabs on the bottom to securely hold them in place

Brushed Stock No.	Polished Stock No.	Matte Black Stock No.	Applications
KACG24RC	KACGP24RC	KACGM24RC	Classic Series Roll Cabs
KACG2410TC	KACGP2410TC	KACGM2410TC	Classic Series Top Chests with Lid

Use "KACGB" prefix for Gloss Black corner guards.

KACNG2

Soft Corner Guards, Classic/Heritage Series

KACNG2 Flexible Corner Guard Set, Classic/Heritage Series

- Fits all Classic and Heritage roll cabinets
- Die-cut black pebbled buna nitrile
- Over-molded spring steel tabs inserted for mounting corner guard to toolbox
- Custom molded material – installs in seconds
- Brand molded into corners
- Overall height 32 1/2", thickness .19"

KACGHRC

Stainless-Steel Corner Guards, Heritage Series

- Corner guards are available in brushed and polished stainless-steel
- Corner guards are designed to cover top to bottom vertically
- Custom wrench S machined into top and bottom
- Each corner guard is applied with double-sided *3M* 300LSE tape and has a flange on top and bending tabs on the bottom to hold them in place

Brushed Stock No.	Polished Stock No.	Applications
KACGHRC	–	Fits all Heritage Roll Cabs with rounded corners (2 sides included)
KACG53RC	KACGP53RC	Fits all Heritage Roll Cabs with square corners
KACGHTC	–	Fits all Heritage Top Chests with rounded corners (2 sides included)
KACG53TC	KACGP53TC	Fits Heritage Top Chests with lid and square corners

Rounded corners shown. Also comes in new version with square corners KACG53RC and KACGP53RC.

Powder-Coated Steel Corner Guards

- Corner guards are made from powder-coated steel
- Provide a nice contrast to tool storage colors
- Laser cut Snap-on® "S" reveals paint color

Stock No.	Applications
KACGB24RC	Gloss Black: KRA2407, KRA2411, KRA2422, KRA2418 plus all other Classic Series Roll Cabs
KACGB53RC	Gloss Black: KRA5308F Series Square Corner Heritage Roll Cabs
KACGB53TC	Gloss Black: KRA5308F Only
KACGB2410TC	Gloss Black: KRA2405, KRA2410 & KRA2415 Only
KACG24RC(xxx)	KRA2407, KRA2411, KRA2422, KRA2418 plus all other Classic Series Roll Cabs
KACG24TC(xxx)	KRA2410 & KRA2415 Top Chests

Add color suffix: PBO=Red, PCM=Royal Blue, PDG=Midnight Blue, PJJ=Extreme Green, PJK=Electric Orange, POT=Flat Black w/ Black Trim, PU=White

Guard Sets

- Protective accessories coated in actual Snap-on® powder-coat paint colors
- Made from laser-cut steel
- Bottom guard is made from stainless-steel for corrosion protection
- Provides scratch protection
- Available in ten powder-coated colors: Red (PBO), Royal Blue (PCM), Candy Apple Red (PJH), Extreme Green (PJJ), Electric Orange (PJK), Hot Pink (PNK), Gloss Black (PC), Titanium (FGY), Purple (PPL) and Flat Blue (FBU)
- Orange tint is slightly different than the actual *Snap-on* orange color

KA2423BSET KRA2423 Series Roll Cab 21pc Guard Set

Includes one 50" drawer front, one corner guard set, one drawer guard set and one stainless-steel bottom guard (roll cab not included)

Stock No.	Color
KA2423SETPBO	Red
KA2423SETPCM	Royal Blue
KA2423SETPJH	Candy Apple Red
KA2423SETPJJ	Extreme Green
KA2423SETPJK	Electric Orange
KA2423SETPNK	Hot Pink
KA2423BSET	Gloss Black
KA2423SETFGY	Titanium Gray
KA2423SETPPL	Purple
KA2423SETFBU	Flat Blue

KA2411SETPCM

KA2411SETPJH

KA2422BSET KRA2422 Series Roll Cab 14 Piece Guard Set

Includes one 50" drawer front, one corner guard set, one drawer guard set and one stainless-steel bottom guard (roll cab not included)

Stock No.	Color
KA2422SETPBO	Red
KA2422SETPCM	Royal Blue
KA2422SETPJH	Candy Apple Red
KA2422SETPJJ	Extreme Green
KA2422SETPJK	Electric Orange
KA2422SETPNK	Hot Pink
KA2422BSET	Gloss Black
KA2422SETFGY	Titanium Gray
KA2422SETPPL	Purple
KA2422SETFBU	Flat Blue

KA2411SETPJJ

KA2411BSET KRA2411 Series Roll Cab 15pc Guard Set

Includes one 50" drawer front, one corner guard set, one drawer guard set and one stainless-steel bottom guard (roll cab not included)

Stock No.	Color
KA2411SETPBO	Red
KA2411SETPCM	Royal Blue
KA2411SETPJH	Candy Apple Red
KA2411SETPJJ	Extreme Green
KA2411SETPJK	Electric Orange
KA2411SETPNK	Hot Pink
KA2411BSET	Gloss Black

KA2411SETPJK

KA2411SETPNK

⚠WARNING

- Do not open multiple drawers
- Images may be shown without actual warning labels
- Read safety precautions on pages W1 to W4

ACCESSORIES: CUSTOMIZATION

Wrench Wheel Cover Sets

Stock No.	Description
KAWCR-6	Red, 6pc
KAWCB-6	Black, 6pc
KAWC-6	Chrome, 6pc

Roll Cab Handle Bars

- Fits all Classic, Heritage and KRSC carts
- Hot new colors to match or contrast roll cabs or carts
- Heavy duty aluminum construction
- Powder-coated paint
- Knurled grip

KA2422HDLBU

KA2422HDLGN

Stock No.	Description
KA2422HDLB	Black with Silver Etching
KA2422HDLBU	Royal Blue with Silver Etching
KA2422HDLGN	Extreme Green with Silver Etching
KA2422HDLOR	Electric Orange with Silver Etching
KA2422HDLP	Polished Chrome with Etching
KA2422HDLPK	Pink with Silver Etching
KA2422HDLRD	Candy Apple Red with Silver Etching

TOOL STORAGE LIGHTING

KEWLED4

LED Light Bars

- Automatic on/off: durable and strong contacts provide positive engagement
- Magnetic installation of the light bar and the power switch provides easy installation and maneuverability
- Create a lighting experience that outshines anything in the shop
- Top quality materials and construction
- Low energy use
- Best heat dissipation
- High-output LED system uses application specific LED technology with a three-year unlimited warranty

Stock No.	Useful Light Output (lumen)	LED Input Power (W)	System Input Power (W)	System Efficacy (lumen/W)	Length, feet
KEWLED2	540	6.6	8.0	67	2
KEWLED4	1,733	21.7	25.5	68	4
KEWLED5	2,080	26.0	30.6	68	5
KEWLED3P4	1,733	21.7	25.5	68	4
KEWLED4P5	2,080	26.0	30.6	68	5

*LEDs are in individual ports for premium light dispersion.
**LEDs are grouped with fewer ports for a more economical solution.
KEWLED Series Bars fit: EPIQ Series: KEWN WorkCenters, KEHN Overheads, KELN Lockers (24" model), Masters Series: KRL1072 and KRL1054 WorkCenters, Classic Series: KRA2472 and KRA2454 WorkCenters

KALEDBLUE

LED Light Kits

- 13" LED strips are lightweight and can be attached to any surface using two-way soft tape
- LED strips can be connected in a straight line
- Connecting the LED strips with the included short connector cord allows the 13" LED strips to be placed around corners or at different levels from each other
- Each kit has a white six-way terminal to allow up to five additional LED add-on kits
- Kit includes three 13" LED strips, two short connector cords, one six-way terminal and two-way soft tape
- Add-on kits contain ten 13" LED strips, one short connector cord, one 6' cord and two-way soft tape

Stock No.	Color	Stock No.	Color
KALEDWHITE	White	KALEDWHITE-1	White Add-on Kit
KALEDBLUE	Blue	KALEDBLUE-1	Blue Add-on Kit
KALEDGREEN	Green	KALEDGREEN-1	Green Add-on Kit
KALEDRED	Red	KALEDRED-1	Red Add-on Kit

LED WorkCenter Desk Lights

KEWLEDFLEXL Flexible WorkCenter Desk Light
- 18" shaft, magnetic base, rechargeable 2,600 mAL Li-ion battery
- 110V AC charger
- Great for carts

KEWLED24 WorkCenter Light
- Flexible shaft can be bent up to 160° to provide lighting where needed
- Magnetic flexible posts make it easy to install on any flat steel surface above or on the back wall
- 144 LEDs located throughout entire length of light for maximum brightness
- Diffuser included for uniform light

KEWLEDFLEXL

KEWLED24

LED Light Box

KALED24 Stainless-Steel LED Lighted Panel
- 28" x 7" polished stainless-steel case with laser-cut Snap-on® logo and a mirror-like finish
- Internal LED system contains two 27" strips lined with high quality LEDs
- Use on inside top chest and roll cart lids plus back riser walls
- Polished stainless-steel case with laser-cut *Snap-on* logo
- Two cool white extra bright internal LED strips pre-assembled in case
- White diffuser
- Wall outlet/switch adaptor included
- Compatible with US and Canadian electrical requirements
- Bright LED lighting with low power use
- Includes LED Flexible Light Strip (2" x 27") and 110–240V AC Power Adaptor with Switch

LED *Snap-on* Logo Display Panels

- Can be mounted to steel surface via included rare earth magnets
- Use AC or DC power comes with 110V AC plug and battery pack
- Acrylic panel is dipped and coated for abrasion resistance

Stock No.	Size, inches	Description
KALED28X7R	28 x 7	Red Light
KALED28X7B	28 x 7	Blue Light
KALED28X7G	28 x 7	Green Light
KALED28X7O	28 x 7	Orange Light
KALED28X7P	28 x 7	Pink Light
KALED28X7W	28 x 7	White Light
KALED8X11B	11 x 8	Blue Light
KALED8X11G	11 x 8	Green Light
KALED8X11O	11 x 8	Orange Light
KALED8X11P	11 x 8	Pink Light
KALED8X11R	11 x 8	Red Light
KALED8X11W	11 x 8	White Light
KALED12X15MC	12 x 15	Multi-color

KALED28X7R

KALED8X11R

WARNING
• Images may be shown without actual warning labels
• Read safety precautions on pages W1 to W4

ACCESSORIES: DECALS

Logo and Racing Decals

(Background is not a part of decal.)
Logo and racing decals show customers that you use the best while supporting Snap-on® Racing™ programs.

SS3266A

SS2201A

Stock No.	Description	Size, inches	Logo Color
SS2751A	*Snap-on* Logo Decal	43 x 8	White
SS2752A	*Snap-on* Logo Decal	43 x 8	Black
SS2753A	*Snap-on* Logo Decal	43 x 8	Silver
SS2809A	*Snap-on* Logo Decal	43 x 8	Red
SS3266A	*Snap-on* Logo Decal	23 x 4	White
SS2231A	*Snap-on* Logo Decal	23 x 4	Silver
SS2232A	*Snap-on* Logo Decal	23 x 4	Black
SS2808A	*Snap-on* Logo Decal	23 x 4	Red
SS2201A	*Snap-on* "S" Decal	13 x 8 1/2	White
SS2240A	*Snap-on* "S" Decal	13 x 8 1/2	Black
SS2241A	*Snap-on* "S" Decal	13 x 8 1/2	Silver
SS2810A	*Snap-on* "S" Decal	13 x 8 1/2	Red
SS2935A	*Snap-on* "S" Decal	23 x 15	White
SS2937A	*Snap-on* "S" Decal	23 x 15	Black
SS2936A	*Snap-on* "S" Decal	23 x 15	Silver
SS2938A	*Snap-on* "S" Decal	23 x 15	Red

HAND TOOL ORGANIZATION

A264A

63A5000

A269A

A271A

Socket Rails and Clips

Stock No.	Rail Length, inches	Clip Size
A265A	7 3/8	1/4" Drive
A267A	13 3/8	3/8" Drive
A269A	10 3/8	3/8" Drive
A270A	16 3/4	1/2" Drive
A271A	—	1/4" Drive (package of 25)
A272A	—	3/8" Drive (package of 25)
A273A	—	1/2" Drive (package of 25)
A274C	—	3/4" Drive (package of 25)

A264A Socket Rail Hold Down Clip
- Mounts to drawer, tote tray or wall board
- Snaps open to release socket rail
- Package of ten

63A5000 Hardware Clips Package
- Assorted socket rail clips in bag
- Fits Slots-N-Dots™ system (included with WorkStation risers)

A278 Mounting Clips
- 5/16"–3/4"
- Screws into 1/8" holes
- Package of ten

A279 Mounting Clips
- 5/8"–3/4"
- Screws into 1/8" holes
- Package of ten

LSR1406

LSR3812A

YA438B

Socket Rails (with Quick Release Locking Clips)

- Push button, spring-loaded clips provide for quick, easy release of socket, even with greasy hands
- Extruded aluminum socket rail for light weight and durability
- Detent ball at bottom of clip permits clip to be easily positioned on rail
- Rail also features laser-engraved *Snap-on* logo

Stock No.	Square Drive, inches	Clips	Rail Color	Overall Length, inches
LSR1406	1/4	6	Black	7 3/8 (187.3)
LSR1412	1/4	12	Black	10 (254)
LSR3812A	3/8	12	Black	12 (304.8)
LSR1213	1/2	13	Black	14 (355.6)

Movable Peg Socket Rails

- 18" rails feature adjustable pegs to organize sockets
- Pegs can be stacked for extra storage
- Adhesive backed rail

YA425B Socket Rail
1/4" square drive (20 pegs)
YA438B Socket Rail
3/8" square drive (18 pegs)
YA450B Socket Rail
1/2" square drive (14 pegs)
PEN7410 Replacement Square Pegs, 1/4"
PEN7411 Replacement Square Pegs, 3/8"
PEN7412 Replacement Square Pegs, 1/2"

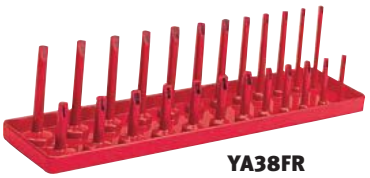

YA38FR

Socket Holders with Posts

- All sockets are easily visible
- Each post is marked for correct socket size
- Sockets are easily removed with one hand
- Use for hand, power and impact sockets
- High-impact plastic resists oil and grease
- Socket must have a through hole (Some smaller Snap-on® sockets manufactured before 1983 do not have through holes)

Stock No.	Color	Square Drive, inches	Stores Socket Sizes (deep and shallow)	Overall Dimensions, inches
YA12FR	Red	1/2	3/8"–1 1/4" in 1/16" increments	18 x 4 x 3 3/4
YA12MET	Gray	1/2	10 mm–27 mm in 1 mm increments	20 1/2 x 3 1/2 x 3 3/4
YA14FR	Red	1/4	1/8"–5/8" in 1/16" increments	9 x 2 1/8 x 2 1/2
YA14MET	Gray	1/4	4 mm–15 mm in 1 mm increments	9 x 2 1/8 x 2 1/2
YA38FR	Red	3/8	1/4"–1" in 1/16" increments	11 3/4 x 3 x 3
YA38MET	Gray	3/8	6 mm–20 mm in 1 mm increments	13 1/8 x 3 x 3

BPMVSR12A

BPMVSR14A

BPMVSR38A

Magnetic Vertical Socket Rails

- View socket sizes quickly and easily with these new magnetic vertical socket rails
- Magnet backing (with protective foam covering) allows sockets to be attached to any metal surface
- Allows sockets to be placed on rack so size is visible
- Posts replaceable if lost or broken
- Can be laid down flat in drawer if necessary

BPMVSR14A Magnetic Vertical Socket Rail
1/4" drive

BPMVSR38A Magnetic Vertical Socket Rail
3/8" drive

BPMVSR12A Magnetic Vertical Socket Rail
1/2" drive

A263B

KTA500

BPSKTRLSTRY

YAURSET

Multi-Row Socket Trays

- Steel panel units have socket rails attached and a carrying handle

A263B Socket Holder
- Fits in top, below pallet
- For square drive tools to 4" deep
- Holds four 10 3/8" rows and two 3 1/2" rows of sockets
- Five-row organizer measures 10 1/8" x 8 1/4" (US Patent #5,284,245)

A288B Socket Holder
- Ten-row organizer measures 14 1/2" x 17 3/16"
- Two handles (US Patent No. #5,284,245)

KTA500 Multi-Row Socket Tray
- Holds up to 80 sockets in 1/4", 3/8" and 1/2" drive sizes
- Features one rail with (16) 1/4" drive clips, two rails with (16) 3/8" drive clips each and two rails with (16) 1/2" drive clips each
- Aligns sockets for fast, easy selection
- Use on roll carts and will fit into most roll cab/tool chest drawers
- Overall length of 20"
- 17 1/2" L x 7 9/16" W x 2 1/2" D
- Made of heavy gauge steel

BPSKTRLSTRY Multi-Row Socket Tray (Blue-Point®)
- Holds up to 80 sockets in 1/4", 3/8" and 1/2" drive sizes
- Four rails with (20) 1/4" drive clips, (30) 3/8" drive clips and (30) 1/2" drive clips
- Low-profile design to fit most drawer sizes
- Sturdy handle for either hanging or carrying the tray

YAURSET Socket Organizer
- Accommodates up to 60 tools in 1/4", 3/8" and 1/2" drive sizes
- Complete economical socket system organizes sockets in thel box drawer or on peg board; individual rails lift out for easy portability
- Includes ratchet extension storage

YA38UR 3/8" Drive Socket Organizer
- Holds up to 15 sockets
- Economical socket organizer rail fully adjusts to fit a wide variety of socket configurations

YAURCMH Horizontal Cart Mount Kit
- Holds up to 30 sockets
- Easily attaches to the side of mobile tool carts

YAURCMV Vertical Cart Mount Kit
- Holds up to 15 sockets or wrenches
- Easily attaches to the side of mobile tool carts

ACCESSORIES: HAND TOOL ORGANIZATION



BPTRYLAS

BPSSTRYLAS

Lock-A-Socket Trays (Blue-Point®)

BPTRYLAS Lock-A-Socket Tray
- Holds a variety of drive sizes on one tray
- Tray measures 8 3/4" x 20"
- Sockets are locked by turning to the right 90°, unlocked by turning to the left 90°
- Eight clips are included for ratchets and other attachments
  - Rubber pegs are located underneath for surface grip and protection
- Swivel handles included for easy carrying
- Manufactured from 16 gauge powder-coated steel for extra strength
- Lock-A-Socket posts are available separately and are interchangeable for customization

BPSSTRYLAS Lock-A-Socket Tray
BPTRYLAS, manufactured from 16 gauge stainless-steel for extra strength

MTSLAS50LP25 Lock-A-Socket Posts
1/2" drive posts for BPTRYLAS. Pack of 25.

MTSLAS38LP25 Lock-A-Socket Posts
3/8" drive posts for BPTRYLAS. Pack of 25.

MTSLAS25LP25 Lock-A-Socket Posts
1/4" drive posts for BPTRYLAS. Pack of 25.

YA38HTD

Socket Driver Tray

YA38HTD Socket Driver Tray
- Organizes the most commonly used 3/8" drive hex and TORX® socket drivers
- Use only with chrome hand socket drivers
- Sizes are clearly indicated on the holder
- Stores fractional hex drivers in 1/8" – 3/8" range (1/8", 9/6", 5/3", 3/1", 7/3", 1/4", 5/16" and 3/8"), metric hex drivers in 4–10 mm range (4 mm, 5 mm, 6 mm, 7 mm, 8 mm, 9mm and 10 mm) and *TORX* drivers from T27–T60 sizes (T27, T30, T40, T45, T47, T50, T55 and T60)
- Three open pockets for additional sockets
- Overall dimensions of 9 1/4" x 3 5/16" x 1/16"
- Made of durable, lightweight ABS plastic

KMAGBIT37R

Magnetic Hex Bit Holders/Rubber Base *(Blue-Point)*

- Magnetic base affixes to any ferrous metal without scratching surface
- Bits will stay in holder, even in upside down applications
- Non-transferable magnetic material will not magnetize tools or damage onboard automotive computers or other related circuitry
- Resists most shop chemicals
- Rubber base won't mar finishes
- Holds up to 37 bits
- Bits not included

KMAGBIT37O Magnetic Hex Bit Holder Orange
KMAGBIT37R Magnetic Hex Bit Holder Red
KMAGBIT37B Magnetic Hex Bit Holder Black

KMAG38S12O

KMAG38D12R

KMAG38SD24B

Magnetic Socket Holders *(Blue-Point)*

- Magnetic base affixes to any ferrous metal without scratching surface
- Sockets will stay in holder, even in upside down applications
- Non-transferable magnetic material will not magnetize tools or damage onboard automotive computers or other related circuitry
- Resists most shop chemicals
- Rubber base won't mar finishes

Stock No.	Color	Storage	Socket Size Ranges
KMAG14SD26B	Black	Holds 13 standard and 13 deep 1/4" drive sockets	1/4"–9/16", 4 mm–14 mm
KMAG14SD26O	Orange	Holds 13 standard and 13 deep 1/4" drive sockets	1/4"–9/16", 4 mm–14 mm
KMAG14SD26R	Red	Holds 13 standard and 13 deep 1/4" drive sockets	1/4"–9/16", 4 mm–14 mm
KMAG38S12B	Black	Holds 12 shallow 3/8" drive sockets	Up to 1"
KMAG38S12O	Orange	Holds 12 shallow 3/8" drive sockets	Up to 1"
KMAG38S12R	Red	Holds 12 shallow 3/8" drive sockets	Up to 1"
KMAG38D12B	Black	Holds 12 deep 3/8" drive sockets	Up to 1"
KMAG38D12O	Orange	Holds 12 deep 3/8" drive sockets	Up to 1"
KMAG38D12R	Red	Holds 12 deep 3/8" drive sockets	Up to 1"
KMAG38SD24B	Black	Holds 12 shallow and 12 deep 3/8" drive sockets	Up to 1"
KMAG38SD24O	Orange	Holds 12 shallow and 12 deep 3/8" drive sockets	Up to 1"
KMAG38SD24R	Red	Holds 12 shallow and 12 deep 3/8" drive sockets	Up to 1"

MR1426

MR3828BL

Magnetic Socket Trays

- Hold metric or fractional sockets in these molded ABS plastic trays
- Handle for easy movement to job sites

Stock No.	Color	Storage	No. of Compartments
MR1426	Red	Holds 13 standard and 13 deep 1/4" drive sockets	26
MR1426BL	Black	Holds 13 standard and 13 deep 1/4" drive sockets	26
MR3828	Red	Holds 13 standard and 13 deep 3/8" drive sockets	28
MR3828BL	Black	Holds 13 standard and 13 deep 3/8" drive sockets	28

MR1426 Magnetic Socket Tray
- For 1/4" drive sockets
- 26 compartments
- Storage for 13 standard, 13 deep sockets

MR1426BL Magnetic Socket Tray
Black

MR3828 Magnetic Socket Tray
- For 3/8" drive sockets
- 28 compartments
- Storage for 14 standard, 14 deep sockets

MR3828BL Magnetic Socket Tray
Black

YA381A

YA389ABL

Wrench Organizers (Blue-Point®)

- The wrench holding tabs on the YA389 series are the reverse of the YA381 series so two or more sets can be stored side by side with all wrenches facing forward
- 6 1/4" x 2 1/2" x 9 1/2" long

Stock No.	Color	Storage
YA381A	Red	Holds up to 12 wrenches
YA381ABL	Black	Holds up to 12 wrenches
YA389A	Red	Holds up to 12 wrenches
YA389ABL	Black	Holds up to 12 wrenches

YA381A Wrench Organizer
Red, holds up to 12 wrenches

YA381ABL Wrench Organizer
Black, holds up to 12 wrenches

YA389A Wrench Organizer
Red, holds up to 12 wrenches

YA389ABL Wrench Organizer
Black, holds up to 12 wrenches

KRA15A

Wrench Organizers

Includes a pair of 24" long plastic organizers. Cut to desired length and attach to any drawer with foam backing.

KRA15A Wrench Organizer
For smaller wrenches

KRA22A Wrench Organizer
For larger wrenches



YA381FRA

Wrench Racks

- Specifically designed to hold up to 13 Snap-on® wrenches
- Wrench size is clearly visible on rack
- Fits 2" deep KRL drawers and most 2" deep KRA drawers
- Retaining tabs for convenient vertical mounting or carrying

YA381FRA Wrench Rack
Red, holds 1/4"–1" sizes

YA381MET Wrench Rack
Gray, holds 7 mm–19 mm sizes

MAGRAK10

WRM10

BPS14MWH

BPM14MWH

Magnetic Wrench Organizers *(Blue-Point)*

MAGRAK10 Magnetic Wrench Organizer
- Ten angular slots provide storage for most wrenches
- A ridge at the base prevents wrenches from contacting tool storage surfaces
- Mount magnetically for instant wrench access
- Black

MAGRAK10R Magnetic Wrench Organizer
- Red

WRM10 Adjustable Wrench Organizer
- Holds ten wrenches
- Adjusts to hold a variety of wrench sizes
- Magnets secure individual wrenches to rack
- Individual magnets hold each wrench securely at its center, allowing easy one-hand removal
- Magnetic holders slide on aluminum rail to adjust wrench spacing
- Base magnets secure the wrench rack to tool storage unit or other ferrous metal surfaces
- Base is made of non-scratch, heavy duty anodized aluminum
- Red

WRM10-B Adjustable Wrench Organizer
- Holds ten wrenches
- Blue

WRM15 Adjustable Wrench Organizer
- Holds 15 wrenches
- Red

BPS14MWH Magnetic Wrench Holder
- Holds sizes 1/4"–1" wrenches
- Strong magnets secure wrenches in place during movement
- Entire unit is magnetized to hold rack to drawer
- Blue

BPM14MWH Magnetic Wrench Holder
- Same as BPS14MHW except it holds 8 mm–21 mm wrench sizes
- Black

WARNING
• Images may be shown without actual warning labels
• Read safety precautions on pages W1 to W4

ACCESSORIES: HAND TOOL ORGANIZATION

YA384SSG7B

YA384SSG7R

Soft Grip Stubby Wrench Racks (Blue-Point®)

- Easily stores and organizes wrenches
- Fits all 2" deep drawers in Snap-on® tool storage units
- Mounting holes align with the Slots-N-Dots™ system on *Snap-on* WorkCenter riser units
- Molded handle allows easy transport of loaded rack
- Red and black color schemes allow user to easily differentiate fractional from metric sizes
- Racks may be trimmed for use with smaller wrench sets
- Flexible plastic material will not corrode or mar wrench finish

YA384SSG7B Stubby Wrench Rack
Holds seven stubby wrenches. Black.
YA384SSG10B Stubby Wrench Rack
Holds ten stubby wrenches. Black.
YA384SSG7R Stubby Wrench Rack
Holds seven stubby wrenches. Red.
YA384SSG10R Stubby Wrench Rack
Holds ten stubby wrenches. Red.

A277

Crowfoot Wrench Holder

A277 3/8" Crowfoot Holder

- Organize and store your crowfoot wrenches
- Two-piece design snaps apart for access to desired size
- 8 3/4" long

YA207

Magnetic Nut Holder

YA207 Nut Holder

- Flexible stainless-steel body with pivoting magnetic head clips onto open-end and box end wrenches
- Holds nut on sizes 3/8"–3/4" (10 mm–19 mm)

YA381SG12

YA389SG12

Soft Grip Wrench Racks

- Design holds wrench securely yet provides quick and easy release
- Easily stores and organizes wrenches
- Fits all 2" deep drawers in *Snap-on* tool storage units
- Mounting holes align with the *Slots-N-Dots* system on *Snap-on* WorkCenter riser units
- Molded handle allows easy transport of loaded rack
- Red and gray color schemes allow user to easily differentiate fractional from metric sizes
- Racks may be trimmed for use with smaller wrench sets
- Flexible plastic material will not corrode or mar wrench finish
- Available in standard and reverse styles for convenient side-by-side mounting in tool drawers (US Patent #5,638,964 applies)

Standard configuration (Red):
YA381SG8 Soft Grip Wrench Organizer
Holds up to eight wrenches
YA381SG12 Soft Grip Wrench Organizer
Holds up to 12 wrenches
YA381SG15 Soft Grip Wrench Organizer
Holds up to 15 wrenches
Reverse configuration (Gray):
YA389SG8 Soft Grip Wrench Organizer
Holds up to eight wrenches
YA389SG12 Soft Grip Wrench Organizer
Holds up to 12 wrenches
YA389SG15 Soft Grip Wrench Organizer
Holds up to 15 wrenches

TCK1827BBR

Tool Control Kits

TCK1827BBR Tool Control Kit 18" x 27"
TCK3627BBR Tool Control Kit 36" x 27"
TCK4020BBR Tool Control Kit 40" x 20"

BLP3CANHLDR

BLP2CANHLDR

BLPPTHLDR

Magnetic Can/Bottle Holder (Blue-Point®)

BLP3CANHLDR Magnetic Can/ Screwdriver Holder
- Ideal for use on side of toolbox or service cart
- Holds three spray cans and seven screwdrivers
- Spray can slot is 3" diameter
- Eight powerful cushioned magnets resist surface scratching
- Heavy gauge 0.80 mm black powder-coated steel construction
- Weight: 2.62 lb
- Dimensions: 5" W x 11.75" L x 5.12" H

BLP2CANHLDR Magnetic Can/ Screwdriver Holder
- Ideal for use on side of toolbox or service cart
- Holds two spray cans and five screwdrivers
- Spray can slot is 3" diameter
- Six powerful cushioned magnets resist surface scratching
- Heavy gauge 0.80 mm black powder-coated steel construction
- Weight: 1.92 lbs
- Dimensions: 5" W x 8.5" L x 5.12" H

BLPPTHLDR Magnetic Roll Towel Holder
- Ideal for use on side of toolbox or service cart
- Holds roll of shop towels (set of two holders)
- Powerful cushioned magnet resists surface scratching
- Heavy gauge 0.80 mm black powder-coated steel construction
- Weight: 1.38 lb Dimensions: 4" W x 5 1/8" L x 3 1/4" H (each piece)

KRSA30



KRDDMAG130

Magnetic Tool Silhouettes

KRSA30 Magnetic Tool Silhouettes
- (30) 1" x 1 1/2" magnetic tool silhouettes
- Apply anywhere on tool storage unit to visually aid in tool organization
- Magnetic; leaves no sticky adhesive

Flexible Magnetic Strip

KRDDMAG130 Flexible Magnetic Strip
- Magnetic, adhesive-backed strip allows easy drawer divider attachment
- 1" wide, 30' long

KAMM1212

KAMM126

KAMM612

KAMM122

Magnetic Panels

- Magnetic base attaches to riser, toolbox, cart, creeper or any ferrous surface in seconds
- Tools are easily positioned on the magnetic panel
- Ideal for holding fasteners during removal and assembly operations
- High-strength magnets
- Made from 16 gauge steel. 3/16" thick
- Will not magnetize tools

KAMM1212 Magnetic Panel
Measures 12" x 12"

KAMM126 Magnetic Panel
Measures 12" x 6"

KAMM612 Magnetic Panel
Measures 6" x 12"

KAMM122 Magnetic Panel
Measures 2" x 10 5/8"

WARNING
• Images may be shown without actual warning labels
• Read safety precautions on pages W1 to W4

ACCESSORIES: MAGNETIC

BLPMPTSETA

MRB5A

MRB10A

MRB12A

MRPB10MP5

MRB15A

BPMST135

Magnetic Trays and Dishes (Blue-Point®)

Magnetic Parts Trays
- Tray attaches to a cart or box with full-length magnets that cover the entire backside of tray
- Holds nuts, bolts, sockets or a variety of other tools and hardware
- Tray won't scratch paint and attaches to any flat metal surface
- Corrosion-resistant finish

BLPMPT6A Magnetic Parts Tray
6" long

BLPMPT8A Magnetic Parts Tray
8" long

BLPMPT10A Magnetic Parts Tray
10" long

BLPMPT12A Magnetic Parts Tray
12" long

BLPMPTSETA Set
One each of BLPMPT6A, BLPMPT8A, BLPMPT10A and BLPMPT12A

MRB5A Magnetic Bowl
- Round stainless-steel dish features powerful mounting magnet
- Securely holds small parts and tools
- 5 3/8" ID

MRB10A Magnetic Tray
- Rectangular magnetic tray holds metal parts and small tools
- Magnetically attaches to any flat iron or steel surface
- Measures 9 1/2" x 5 1/2"

MRB12A Magnetic Tray
- Rectangular magnetic tray holds metal parts and small tools
- Magnetically attaches to any flat iron or steel surface
- Features three 3 1/8" diameter magnets that are rubber coated to prevent scratching
- Measures 6 5/16" x 14 7/32"

MRPB10MP5 Magnetic Dish (5 pack)
- Each tray measures 9 1/2" L x 5 1/2" W x 1 1/8" D
- Molded plastic design coupled with rubber base helps prevent damage to vehicle finish
- Fully magnetized to hold contents and adhere to ferrous surfaces
- Use upside down or on the side of the vehicle
- Each tray weighs 1.4 lb
- Package of five trays includes one tray each in the following high visibility colors: red, orange, green, yellow and blue

MRB15A Magnetic Tool Tray
- Keep tools or parts within easy reach with this magnetic tray
- Stainless-steel with four large rubber based magnets on the bottom to resist scratching
- 11 5/8" L x 10 3/4" W x 1/2" D

BPMST135 Storage Tray
- Create additional workspace for your toolbox or roll cart
- Strong magnetic panel inside tray holds a variety of metal objects like sockets, nuts, bolts, extensions and parts
- Hangs easily on the side of a drawer or toolbox tray
- Made of heavy duty powder-coated steel
- Measures 2" H x 2" D x 13 1/2" L

YA162

KAMR123

YA209

MAGWRENCH

Magnetic Bar Tool Holders

Magnet holds tools for easy access

YA161 Magnetic Tool Bar Holder
Black finish, 24" long

YA162 Magnetic Bar Tool Holder
Black finish, 13" long

KAMR123 Magnetic Bar Tool Holder
- Can magnetically mount to metal surface or can be screw-mounted
- Measures 11 3/4" L x 2 1/4" W x 7/8" D
- Housing is black finish with chrome finished magnet plate

YA209 Magnetic Bar Tool Holder
Chrome finish, 24" long

MAGWRENCH Magnetic Bar Tool Holder (Blue-Point®)
- Industrial strength magnets keep it secured to a metal surface
- Holds tools for quick and easy access
- Chrome-plated steel bar with chrome-plated nylon ends
- Overall size is 20" (with approximately 12" of magnetic holding space)

DRAWER ORGANIZATION

KDDU2A

KDD2C-4A

KDD54-6

KDD4C-4

Plastic Drawer Dividers/2" Drawer Height

Stock No.	Drawer Style	Inside Drawer Dimensions, inches	Box Depth, inches
KDD402A	Heritage	1 19/32 H x 21 W x 17 D	20
KDD412A	KRA4107/ KRSC46	1 19/32 H x 34 1/2 W x 17 D	20
KDD702A	KRL722/56/ Classic	1 19/32 H x 14 7/16 W x 21 1/2 D	24
KDD712A	KRL narrow	1 19/32 H x 14 7/16 W x 26 1/2 D	29
KDD722A	KRL722/56/ Classic	1 19/32 H x 30 3/16 W x 21 1/2 D	24
KDD732A	KRL medium	1 19/32 H x 30 3/16 W x 26 1/2 D	29

ALL SETS (except KDDU2A) – Each set is designed to fit specific KRA and KRL drawers. Set includes four pre-cut perimeter rails that fit along the inside wall of drawers, four corner clips to attach perimeter rails to each other and an assortment of pre-cut adjustable divider rails and divider clips that match the size of the specified drawer. KDDU2 SET ONLY – Universal set that fits any Snap-on® tool storage drawer. Rails can be cut to desired length.

KDD52-6A Drawer Divider Rail
5" long. Pack of six.

KDD72-6A Drawer Divider Rail
7" long. Pack of six.

KDD122-6A Drawer Divider Rail
12" long. Pack of six.

KDD2-20A Drawer Divider Rail Clips
Rail divider clips. Use to attach divider rails to perimeter rails or to other divider rails. Pack of 20.

KDD2C-4A Perimeter Rail Corner Clips
Perimeter rails and corner clips. Pack of four.

KDD2L-2A Drawer Divider Rail
35" long universal drawer divider rails. Can be cut to any length. Pack of two.

KDDU2A Drawer Divider Set
Fits one drawer deeper than 1 1/2". Includes: perimeter rail set (4pc w/corner clips), 26" divider rails (three each), 12" divider rails (three each), 7" divider rails (three each), 5" divider rails (three each) and divider clips (14 each).

KDDP2A Perimeter Rail Set
35" rails (four each) and corner clips (four each)

Plastic Drawer Dividers/4" Drawer Height

Stock No.	Drawer Style	Inside Drawer Dimensions, inches	Box Depth, inches
KDD404	KRA medium	3 19/32 H x 21 W x 17 D	20
KDD414	KRA wide	3 19/32 H x 34 1/2 W x 17 D	20
KDD704	KRL narrow	3 19/32 H x 14 7/16 W x 21 1/2 D	24
KDD714	KRL narrow	3 19/32 H x 14 7/16 W x 26 1/2 D	29
KDD724	KRL medium	3 19/3 H x 30 3/16 W x 21 1/2 D	24
KDD734	KRL medium	3 19/32 H x 30 3/16 W x 26 1/2 D	29

KDD404, KDD414, KDD704, KDD714, KDD724, KDD734 SETS ONLY – Each set includes four pre-cut perimeter rails that fit along the inside wall of drawers, four corner clips to attach perimeter rails to each other and an assortment of precut adjustable divider rails and divider clips that match the size of the specified drawer. KDDU4 SET ONLY – Same as other sets except rails are not pre-cut. All rails must be cut to desired length. Fits any *Snap-on* tool storage drawer.

KDD54-6 Drawer Divider Rail
5" long. Pack of six.

KDD74-6 Drawer Divider Rail
7" long. Pack of six.

KDD124-6 Drawer Divider Rail
12" long. Pack of six.

KDD4C-4 Perimeter Rail Corner Clips
Perimeter rails and corner clips. Pack of four.

KDD4-20 Drawer Divider Rail Clips
Rail divider clips. Use to attach divider rails to perimeter rails or to other divider rails. Pack of 20.

KDD4L-2 Drawer Divider Rail
35" long universal drawer divider rails. Can be cut to any length to fit any drawer storage need. Pack of two.

KDDU4 Drawer Divider Set
- Includes: perimeter rails that fit along the inside wall of drawers, four corner clips to attach perimeter rails to each other, and an assortment of adjustable divider rails and divider clips that fit any *Snap-on* tool storage drawer
- All rails must be cut to desired length

KDDP4 Perimeter Rail Set
35" rails (four each) and corner clips (four each)

WARNING
• Images may be shown without actual warning labels
• Read safety precautions on pages W1 to W4

ACCESSORIES: DRAWER ORGANIZATION

Angled for easy adjustment and parts removal. Perimeter rails with adjustable slots fit around the inside wall of the drawer.

Width and length of spaces offer a wide range of adjustment with a variety of divider widths. Made from galvanized steel.

KADDS2404

Drawer Dividers, Steel

- Designed to be used in all KRL Masters series (24" and 29" deep), Classic series (24" deep) and KRA6200 series road chests
- Simply place the side edges and front/back edges around the perimeter of the drawer and then locate middle dividers and divider tabs wherever they are needed (in 3", 5", 7", 10" and 15" width increments)
- Additional individual components for KRL1000 and KRL7000 series (29" deep) available at www.snapon.com/toolstorage

KADDS3022 Steel Drawer Divider Set
- Use on 20" wide, 2" high EPIQ drawers
- Set includes four perimeter rails, two front-to-back rails and six individual dividers

KADDS3024 Steel Drawer Divider Set
- Use on 20" wide, 4" high EPIQ drawers
- Set includes four perimeter rails, two front-to-back rails and six individual dividers

KADDS3032 Steel Drawer Divider Set
- Use on 30" wide, 2" high EPIQ drawers
- Set includes four perimeter rails, three front-to-back rails and eight individual dividers

KADDS3034 Steel Drawer Divider Set
- Use on 30" wide, 4" high EPIQ drawers
- Set includes four perimeter rails, two front to back rails and eight individual dividers

KADDS3822 Steel Drawer Divider Set
- Use on 38" wide, 2" high EPIQ drawers
- Set includes four perimeter rails, two front-to-back rails and six individual dividers

KADDS3844 Steel Drawer Divider Set
- Use on 38" wide, 4" high EPIQ drawers
- Set includes four perimeter rails, two front to back rails and six individual dividers

KADDS2902 Steel Drawer Divider Set
- Use on Masters or Classic series Wide, 2" high drawers (29" roll cab depth)
- Set includes four perimeter rails, three front-to-back rails and eight individual dividers

KADDS2904 Steel Drawer Divider Set

KADDSN2902 Steel Drawer Divider Set
- Use on Masters or Classic series Narrow, 2" high drawers (29" roll cab depth)
- Set includes four perimeter rails, two front-to-back rails and nine individual dividers

KADDSN2904 Steel Drawer Divider Set
- Use on Masters or Classic series narrow, 4" high drawers (29" roll cab depth)
- Set includes four perimeter rails, two front-to-back rails and nine individual dividers

KADDS2404 Drawer Divider Kit, 4"
Use on KRA2407, KRA2411, KRA2418, KRL722, KRL756 series

KADDS2402 Drawer Divider Kit, 2"
Use on KRA2407, KRA2411, KRA2418, KRL722, KRL756, KRA6200 and KRA6210 series

Handle Mounting Kits and Holders

KAMH2024A Handle Mounting Kit Classic/ Heritage/Carts
- Kit includes mounting plate, vertical arm and horizontal swivel arm

KAMH2930 Handle Mounting Kit KRL 29" and EPIQ
- Kit includes mounting plate, vertical arm and horizontal swivel arm

KAMHLAP Laptop Holder
- Use with most laptop computers
- Requires handle mount kit

KAMHTBLT Tablet Holder
- Use on iPad® Version 2 thru Version 4 and some other tablets
- Requires handle mount kit

KAMHMP Monitor Plate
- Designed with standard mounting hole patterns for monitors up to 24"
- Requires handle mount kit

KAMHBK Keyboard Holder
- Holds standard sized keyboards
- Requires handle mount kit

KAMHEXT Vertical Extension Rod
- Increases height of standard mounting kit by 15" to 71" total

KAMHWL Wire Holding Loops
- Helps to manage and route wiring
- Included with some of the Handle Mount System accessories

KAMH2024A Handle Mount
KAMHTBLT Tablet Holder

YA3089A

KASR12APV

KAT12APV

KAS12PWRPV

KAMS18PV

KAS12APV

KALS15

KAHCK33

KAHK63

KAHLK33


KATR12PV

KATVBRKT

WorkCenter Accessories

- Use these quality accessories to enhance the organization and storage capabilities of the KRL7000 WorkStation series
- All accessories designed to work with the Slots-N-Dots™ mounting system

Looped Tool Organizer. Loops hold screwdrivers, extensions, ratchets, pliers and other small hand tools.

YA3086A Looped Tool Organizer
6" long

YA3089A Looped Tool Organizer
9" long

YA3123A Looped Tool Organizer
12" long

YA3182A Looped Tool Organizer
17 1/2" long

KAT12APV Spray Can Rack (12")
- Holds 3-4 spray cans
- 12" long

KAT18APV Spray Can Rack (18")
- Holds 5-6 spray cans
- 18" long

KASR12APV Screwdriver Rack
- Holds up to seven screwdrivers or other tools
- 12" long

KASRS12PV Screwdriver Rack
- Slotted in front for straight in/out
- Great for workstations

KAS12PWRPV Power Tool Rack
- Holds three units
- Fits all slotted walls found on carts and WorkStation

KAMS18PV Shop Manual Stand
- Shop manual stand with page holder
- 18" wide

KAS12APV Flat Utility Shelf

KAPR24PVB Prybar Rack
- Holds prybars up to 48"
- Mounts to all EPIQ, Masters, Classic and KRSC100 series
- Black textured finish

KALS15 Laptop Stand (15")
15" Laptop Stand. Mounts to *Slots-N-Dots* system.

KAHCK33 Curved Hook (3")

KAHK63 Extended Hook (6")

KAHLK33 Loop (3")

KATR12PV T-Handle Rack (12")
12" T-Handle rack. Mounts to *Slots-N-Dots* system.

KATVBRKT Monitor Mounting Bracket
- Simple and convenient way to display a flat panel television in Snap-on® WorkCenters
- The bracket fits monitor screens from 12"–36" sizes
- The mounting holes are Video Electronics Standards Association (VESA®) compatible and will fit most mounting hole patterns on the back of flat-panel monitors
- Hardware and mounting instructions mount most monitors included
- Attach wall mount to television first, making it very simple to install with one person
- It is recommended to have an assistant when installing to the *Slots-N-Dots* mounting system of *Snap-on* WorkCenters

KEWLED24 WorkStation Light
- Flexible shaft can be bent up to 160° to provide lighting where needed
- Magnetic flexible posts make it easy to install on any flat steel surface above or on the back wall
- 144 LEDs located throughout entire length of light for maximum brightness
- Diffuser included for uniform light

KEWLED24

KRA17B

Plastic Drawer Dividers

KRA17B Drawer Divider
- Partition drawers by cutting divider to desired length
- Attach to drawer with foam backing
- 24" long

KRA27B Drawer Divider
- Same as KRA17B
- 31" long

Plastic Parts Tray Drawer Inserts

SPP804-2

- Lightweight but tough reinforced polymer construction
- Each compartment has an area for labeling, if desired
- Use in tool drawers or cart to organize fasteners, clips, etc.
- Fits into a 2" narrow drawer, such as on KRL722, KRA2411 and KRA2418 models

SPP804-1 Parts Tray
- 14 compartments
- 1 5/16" H x 14 9/16" W x 21 7/16" D

SPP804-2 Parts Tray
- 35 compartments
- 1 5/16" H x 14 9/16" W x 21 7/16" D

WARNING
- Images may be shown without actual warning labels
- Read safety precautions on pages W1 to W4

ACCESSORIES: SHELVES, TRAYS AND RACKS

KRA412FPBO

Shelves, Hangers and Racks

KRA412FPBO Folding Shelf
- Fits all KRA4000 and KRA5000 series roll cabs and KRSC43/46-series carts (requires KRSC404APV adaptor plate)
- Bracket slips over raised lip of roll cab
- Full-length piano hinge
- Folds down when not in use
- 18 1/4" x 18" x 1/4" rim
- Red

KRSC312FPBO Folding Shelf
- Fits all KRSC33A carts
- Red

KRSC312FPV Folding Shelf
- Fits all KRSC33A carts
- Textured Black

Rubber Mat

JKRR412AR Rubber Mat
Fits KRA412 series folding shelves

KRJC23AAPV

KRJC23AAPV Creeper Hanger
- Secures creepers to roll cabs
- Hanger hooks over lip of roll cab and screws down
- Adjustable to four different creeper widths
- Two hook bolts and a lock rod are included so creeper can be padlocked (not included) (US Patent #5,407,170)
- 16 13/16" length
- Black textured finish

EEDMRACKM

EEDMRACKM Storage Rack
- Convenient rack to hold circuit testers, DMM lead sets, amp clamps, temperature probes and other accessories for multimeters
- Can be mounted to wall with screws or placed on roll cab with magnetic block

KRA19

Hang-on Parts Trays

KRA19 Hang-on Parts Tray
- Organize small parts or spray cans
- Hang on roll cabs or tool chest with 1/4" or more lip
- Also for use in drawers as storage trays
- Measures 15" x 3" x 2 1/4"

KRA20 Hang-on Parts Tray
Same as KRA19. Measures 25" x 3" x 2 1/4".

KAPR17 Series Prybar Rack
- Fits all KRSC43/KRSC46, Heritage and Classic
- Holds prybars up to 36"
- Holds 23 handled tools

KAPR17PBO Prybar Rack, Red
KAPR17PC Prybar Rack, Gloss Black
KAPR17PCM Prybar Rack, Royal Blue
KAPR17PDG Prybar Rack, Midnight Blue
KAPR17PES Prybar Rack, Ultra Yellow
KAPR17PJH Prybar Rack, Candy Apple Red
KAPR17PJJ Prybar Rack, Extreme Green
KAPR17PJK Prybar Rack, Electric Orange
KAPR17POT Prybar Rack, Flat Black

KAPR17PBO

KR294AAPV Hang-On Prybar Rack
- Hang up to four prybars or long tools with handles
- Notched angle plate keeps tools from shifting
- Suspend from roll cab or tool chest with 1/4" or more lip

KR294AAPV

KAPR24PVB Prybar Rack
- Holds prybars up to 48"
- Mounts to all EPIQ, Masters, Classic and KRSC100 series
- Black textured finish

KR295 End Cab (Red)
- End cabs offers 28 holes in various diameters for safe and secure storage of small prybars and other long tools
- Hole specifications; eight holes (5/8"), ten holes (3/4"), four holes (7/8"), four holes (1") and two holes (1 1/4")

KR295

KR295PV Textured Black

Sliding Trays

Provide additional work or storage surface

KA41X36 Sliding Tray
Maximize drawer space. Fits common Heritage and KRSC series.

KA41X36-6 Tray Divider Set
Set includes six additional dividers for the KA41X36 sliding tray.

KA41X36 Tools shown not included

KA31X36 Sliding Tray
Maximize your 31" drawer space. Fits Masters and Classic series

761XL36APV Sliding Tray
Fits Masters and Classic. Measures 30.06" W x 6" D x 1.12" H

1001XL36PV Sliding Tray
Fits Masters and Classic. Measures 14 1/8" W x 6" D x 1 1/8" H

1003X36PV Sliding Tray
Fits KR761, KR1001 and KR1003 series. Measures 14 5/8" W x 6" D x 1 1/8" H

1003X36PV

30AE3836PV Sliding Parts Tray
- Same as 30AE2036PV
- 38" wide
- Use on KEXP725A, KERP843B and KERN682B EPIQ roll cabinets

30AE2036PV Sliding Parts Tray
- Optional parts tray for EPIQ roll cabinets
- Accommodates wide variety of tools for convenient access
- Utilize empty space at the top of the toolbox drawer
- 20" wide
- Use on KEXP725A, KEXN725A, KEXN603A, KERP763B, KERP843B, KERN842B, KERN843B, KERN602B, KERN682B EPIQ roll cabinets

30AE3036PV Sliding Parts Tray
- Same as 30AE2036PV
- 30" wide
- Use on KEXP725A, KEXN725A, KEXN603A, KERP763B, KERN843B and KERN602B EPIQ roll cabinets

KRBL4

8-27336A

Locking Bars
Serve as a secondary locking system when ultimate protection is called for. Padlock must be purchased separately. Hardware included.

KRBL2 Lock Bar
32" long. For use on KRL722, KRA2411 and KRA2418.

KRBL4 Lock Bar
36 13/32". For use on KRL1022 and KRL1023.

KRABL2 Lock Bar
32" long. For use on all KRA Series Roll Cabs except KRA2400 series.

8-26836A Lock Bar
Hinged secondary lock bar fits side of low-profile KRL roll cabs such as KRL756 series (similar to 8-27336A).

8-27336A Lock Bar
Fits all Heritage and Blue-Point® hinged manual lock bars. Secondary lock system uses padlock for extra security (not included).

Step Stool
KASS13 Step Stool/Seat
- Versatile step stool, seat and storage unit all in one
- Holds up to 305 lb and has non-skid rubber grommets for stability
- Large interior storage capacity with built-in tote tray
- Has a handle for mobility that folds flat when used as a stool
- 13" H x 22" W x 15" D

KASS13

Accessory Box
KRA444A Accessory Box
- Lockable box mounts inside roll cab or tool chest for protection of valuables
- 8 1/4" x 4 3/4" x 1 1/4"
- Requires 2" minimum drawer depth

KRA444A

Keychain *(Blue-Point)*
GA155A Keychain
- Spring retractable, 24" chain
- Clips onto belt or pocket

GA155A

Floor Lock Kits
- For roll cabs that require better roll cab immobilization

KRFL6A Adjustable Floor Lock Kit
- For KRL Masters series
- 29" deep, 54" wide and larger

KRFL6A

ML1A

ML1504DA

Padlocks
Master Lock® padlocks. Brass cylinders, nickel/silver pin tumblers and brass locking levers for maximum locking protection.

ML1A Padlock
1 3/4" steel case, 5/16" diameter

ML3A Padlock
1 1/2" steel case, 9/32" diameter

ML7A Padlock
1 1/4" steel case, 3/16" diameter

ML1504DA Combination Padlock
- Case hardened 9/32" steel shackle offers protection against cutting and sawing
- Secure three-digit combination
- Automatic locking lever

KACKFLTCLNR

Cleaning Supplies
- Water-based solution is body shop-safe
- To be used on toolboxes, shop equipment and even tools. It is safe on plastic so it can be used for diagnostic hand-held product as well

KACKCLEANER Cleaner/Degreaser, 16 oz
- Safely remove grease, dirt, oil, fingerprints and more

KACKFLTCLNR Matte & Flat Finish Cleaner/ Degreaser, 16 oz
- Safely remove grease, dirt, oil, fingerprints and more
- Cleans without adding a shine to the flat/matte surface

KACKSPDWAXX Speed Wax, 16 oz
- Bring back the shine, and resist water spots, dust, fingerprints and grease

KACKLQDPLSH Liquid Polish, 7.6 oz
- Safely clean, polish and protect stainless-steel and anodized aluminum

KACKMCFIBER1 Microfiber Cloth, 16" x 16"
- Microfiber cloth is machine-washable, lint-free and can be used wet or dry

KACKCAREKIT Premium Care Kit
- Safely remove grease, dirt, oil, fingerprints and more with the cleaner/degreaser
- Bring back the shine and resist water spots, dust, fingerprints and grease with the Speed Wax
- Safely clean, polish and protect stainless-steel and anodized aluminum with the Liquid Polish
- Microfiber cloth is machine-washable, lint-free and can be used wet or dry
- Kit includes one 1.7 oz. bottle of spray cleaner, one 1.7 oz bottle of liquid polish, one 3.4 oz bottle of Speed Wax and one 16" x 16" microfiber cloth

WARNING
- Images may be shown without actual warning labels
- Read safety precautions on pages W1 to W4

ACCESSORIES: FLOOR AND KNEELING MATS

JKAFM36102DP

Anti-Fatigue Diamond Plate Floor Mats

- Skid-resistant chrome diamond plate mat surface
- Flexible anti-fatigue material with extra padding
- Durable, easy to clean and damage resistant

	Stock No.	Size, inches
Diamond Plate Anti-Fatigue Floor Mat	JKAFM3636DP	36 x 36
	JKAFM3648DP	36 x 48
	JKAFM3654DP	36 x 54
	JKAFM3660DP	36 x 60
	JKAFM3672DP	36 x 72
	JKAFM36102DP	36 x 102
	JKAFM36120DP	36 x 120

JKAFM2436BK

JKAFM2448BR

Cushioned Floor Mats

- Exceptional anti-fatigue properties
- Eases lower back stress and leg and foot discomforts from prolonged standing on hard surfaces
- Under padding hugs the smoothest floor surfaces to prevent mat slippage
- Skid-resistant diamond plate mat surface provides sure footing
- Mat resists most shop chemicals
- Graphics are inlaid PVC for greater wear resistance

	Stock No.	Size, inches		Stock No.	Size, inches
Black Mat with Red Snap-on® logo	JKAFM2436BK	24 x 36	Black Mat with Red Border/Red *Snap-on* logo	JKAFM2436BR	24 x 36
	JKAFM2448BK	24 x 48		JKAFM2448BR	24 x 48
	JKAFM2460BK	24 x 60		JKAFM2460BR	24 x 60
	JKAFM2472BK	24 x 72		JKAFM2472BR	24 x 72
	JKAFM3636BK	36 x 36		JKAFM3636BR	36 x 36
	JKAFM3648BK	36 x 48		JKAFM3648BR	36 x 48
	JKAFM3660BK	36 x 60		JKAFM3660BR	36 x 60
	JKAFM3672BK	36 x 72		JKAFM3672BR	36 x 72
	JKAFM3676BK	36 x 76		JKAFM3676BR	36 x 76
	JKAFM3684BK	36 x 84		JKAFM3684BR	36 x 84

JKAFM3654CAS

JKAFM3654EGS

JKAFM3654RBS

Color "S" Logo Floor Mats

- The *Snap-on* "S" logo graphics on the floor mat are color-coded to match the color of the tool storage unit
- Anti-fatigue cushioned floor mat – 36" W x 54" L
- Floor mat eases lower back stress and leg and foot discomfort from prolonged standing on hard surfaces
- Floor mat resists most shop chemicals and provides a sure footing surface

Stock No.	Size, inches	Description
JKAFM3654CAS	36 x 54	Black with Candy Apple Red "S" Logo
JKAFM3654EGS	36 x 54	Black with Extreme Green "S" Logo
JKAFM3654EOS	36 x 54	Black with Electric Orange "S" Logo
JKAFM3654RBS	36 x 54	Black with Royal Blue "S" Logo
JKAFM3654RDS	36 x 54	Black with Red "S" Logo
JKAFM3654PKS	36 x 54	Black with Pink "S" Logo

Kneeling Mats

MAT19PK Kneeling Mat

- Kneeling mat is constructed from three layers of high density foam for comfort
- Black with *Snap-on* logo
- Handle for ease of carrying
- Only available in a package of five

MAT13PK Kneeling Mat

- Cushioned floor mat can help reduce fatigue, protect clothing and increase comfort
- Multi-layered closed foam construction is durable and tear-resistant
- Resistant to most shop chemicals
- Measures 8 1/2" x 13" x 1 1/8" thick
- Only available in a package of five

MAT13PK

MAT38PK Kneeling Mat

- Cushioned creeper mat can be used on a creeper or on the floor
- Multi-layered foam construction is durable and tear-resistant
- Resistant to most shop chemicals
- Measures 15 3/4" x 38 1/2" x 1 1/8" thick
- Only available in a package of five

Detent Kits

Detent kits for ball bearing slides. Kits include standard detents for normal use or firmer retrofit detents to help prevent unlocked drawers from inadvertently rolling open.

8-88CWRK Detent Kit
Two pairs of wide detents. Gray pair for increased stiffness. Off-white pair for standard stiffness.

8-88HBRK Detent Kit
A pair of heavy duty standard cabinet member bumper kits for use with latch (black).

8-88HDRK Detent Kit
A pair of heavy duty cabinet member detent kits for use without latch (gray).

8-88HSRK Detent Kit
A pair of heavy duty intermediate member sequencing detent kits for use with/without latch (black).

8-88ANRK Detent Kit
A pair of narrow, firm stiffness detent kits for drawers without latch (gray).

8-88RRK Detent Kit
A pair of firm stiffness detent kits for over under slide used on KR Series units (gray).

8-88ASNRK Detent Kit
A pair of narrow, standard stiffness detent kits for drawers without latch (black).

8-88SWRK Detent Kit
A pair of wide, standard stiffness detent kits (black).

8-88WRK Detent Kit
A pair of wide, firm stiffness detent kits (gray).

Ball Bearing Drawer Slides

8-05088ALRS Drawer Slide Set
Left/right slide kit with screws. For KRL700 series tool storage units.

8-05188ALRS Ball Bearing Slide
Set Left/right slide kit for Classic KRA2400 series

8-05288ALRS Ball Bearing Slide Set
Left/right slide kit with screws. For all narrow and wide drawers in KRA2000/KRA4000/KRA5000 series units and KRSC series carts.

8-05388ALRS Drawer Slide Set
Left/right slide kit with screws. For KRL1000/KRL7000 series tool storage units.

8-05488AS Ball Bearing Slide Set
Includes two slides and screws. For KRL712 series lockers and KRL7015 series end cabs.

8-05588AS Ball Bearing Slide Set
Includes two slides and screws. For KRL1012/KRL7012 lockers and KRL1015/KRL7015/KRLV7015 end cabs only.

KRL Series Drawer Control (Special Order)

Available for new KRL series roll cabs and top chests. Drawer control permits only one drawer per bank to be opened at a time, reducing the chance of the unit tipping. Existing units cannot be retrofitted. Special order.

Drawer Latches

10-185B Lock'n Roll® Latch (Narrow Bank)
Drawer latch for narrow bank drawers on KRL700/KRL1000/KRL7000 series tool storage units.

10-285B *Lock'n Roll* Latch (Wide Bank)
Drawer latch for wide bank drawers on KRL700/KRL1000/KRL7000 series tool storage units and KRA4000 series 40" wide drawers.

10-385B *Lock'n Roll* Latch (Extra Wide Bank)
Drawer latch for extra wide bank drawers on KRL700/KRL1000/KRL7000 series tool storage units.

10-485B *Lock'n Roll* Latch (Narrow Bank)
Drawer latch for narrow bank drawers on KRA4000 series tool storage units.

10-885B *Lock'n Roll* Drawer Latch (Wide)
Drawer latch for narrow bank drawers on KRA4000 series 26" wide and wide bank of 40" wide units.

10-01085A *Lock'n Roll* Drawer Latch 67"
Drawer latch for wide bank drawers on KRL1032B(C) and KRL1033(A) roll cabs.

10-01185A *Lock-n-Roll* Drawer Latch
Drawer latch for KRL1099.

Touch-up Paint

Color	1/2 oz Bottle Stock No.	12 oz Spray Can Stock No.	PPG Powder No.	PPG Ditzler Wet Spray No.
Red	PN2-83408	REP12A	AR320 Resin	73504
Black (High Gloss)	PN2-84208	PN12-84208	PCU-90200	9895 (9300)
Black (Textured)	—	PN12-86908	PCU-90106	9817
Royal Blue	PN286308	PN1286308	PCU-50134	19026
Cranberry	PN2-84508	PN12-84508	PCU-60139	51797
Ultra Yellow	PN2-87808	PN12-87808	PCU-30115	84199
Green Mica	PN286708	PN1286708	PCU-43100	47767
Deep Purple	PN2-87408	PN12-87408	PCU-60122	52560
Candy Apple Red	PN2-809508A	PN12-809508A	PCU-60137	902979
Electric Orange	PN2-809908A	PN12-809908A	PCU-30132	90621
Arctic Silver	PN2-810208A	PN12-810208A	PCU-73120	910517
Extreme Green	PN2-809808A	PN12-809808A	PCU-40134	906120
Tractor Green	PN2-85308	PN12-85308	PCU-40400	47403
White	PN285208	PN1285208	PCU-80103	91207
Midnight Blue	PN2-87308	PN12-87308	PCU-50117	191009
Flat Black	PN2-811308A	PN12-811308A	PCUP-90105	—
Clear	PN2-CLEAR	PN12-CLEAR	—	—

REP12A

PN1286308

PN286308

⚠WARNING

- Wear mask when using aerosol spray
- Images may be shown without actual warning labels
- Read safety precautions on pages W1 to W4

ACCESSORIES: TOOL STORAGE UNIT MAINTENANCE

Casters

Replacement casters for Snap-on® Tool Storage Roll Cabs

Stock No.	Description	Capacity, lb	Size, inches	Material	Application
8-20739	Heavy Duty Swivel Caster	900	6 x 2	GLA-NYL	KRL1056A, KRL722, KRL756A
8-20839	Heavy Duty Rigid Caster	900	6 x 2	GLA-NYL	KRL1056A, KRL722, KRL756A
8-30939	Extra Heavy Duty Rigid ISO-Ride® Caster	1,700	6 x 2	GLA-Polymer	KRL1022A, KRL1033, KRL1024A, KRL1023A, KRL1043A, KRL1053A, KRL1065A, KRL7022A, KRL7023A, KRL7065A
8-30839	Extra Heavy Duty Swivel *ISO-Ride* Caster	1,700	6 x 2	GLA-Polymer	KRL1022A, KRL1033, KRL1024A, KRL1023A, KRL1043A, KRL1053A, KRL1065A, KRL7022A, KRL7023A, KRL7065A
8-26939A-SL	*ISO-Ride* Swivel Lock, Optional	—	—	—	KRL1022A, KRL1033, KRL1024A, KRL1023A, KRL1043A, KRL1053A, KRL1065A, KRL7022A, KRL7023A, KRL7065A
8-27980A	Heavy Duty Rigid Caster	900	6 x 2	GLA-Polymer	KRL1056B, KRL722A, KRL756B
8-28039A	Heavy Duty Swivel Caster	900	6 x 2	GLA-Polymer	KRL1056B, KRL722A, KRL756B
8-28139B	Medium Duty Swivel Caster	600	6 x 2	Monoprene (Soft)	KRA2407, KRA2411, KRA2418, KRA2432, KRA4107D, KRA4813D, KRA5213D, KRA5319D, KRSC40A, KRSC41
8-28239A	Medium Duty Rigid Caster	600	6 x 2	Monoprene (Soft)	KRA2407, KRA2411, KRA2418, KRA2432, KRA4107D, KRA4813D, KRA5213D, KRA5319D, KRSC40A, KRSC41
8-26139A	Medium Duty Swivel Caster	330	5 x 2	Cast Iron w/ Rubber	KRA2106A, KRA2107A, KRA2212, KRA2306, KRA2312, KRA4008E, KRSC31, KRSC40, KRA2005, KRA2007 (Replace all 4)
8-26439A	Medium Duty Rigid Caster	330	5 x 2	Cast Iron w/ Rubber	KRA2106A, KRA2107A, KRA2212, KRA2306, KRA2312, KRA4008E, KRSC31, KRSC40, KRA2005, KRA2007 (Replace all 4)
8-30539A	Swivel *ISO-Ride* Caster	2,000	7 x 2	GLA/NYL	KERP763B, KERP843B, KERP762B, KERP842B, KERN842B, KERN843B, KERN602B, KERN682B
8-30639A	Rigid *ISO-Ride* Caster	2,000	7 x 2	GLA/NYL	KERP763B, KERP843B, KERP762B, KERP842B, KERN842B, KERN843B, KERN602B, KERN682B
8-21839B	Swivel Caster	500	6 x 2	Aluminum w/ Rubber	KRSC10. KRL756B, Classic, Heritage
8-21939A	Rigid Caster	500	6 x 2	Aluminum w/ Rubber	KRL756B, Classic, Heritage
8-30439AR	Heavy Duty Swivel Caster	900	8 x 2	Steel w/ Polymer	KRSC100, KRSC40, KRSC41, KRSC46
8-31039A	Aluminum Hub Swivel Caster	500	6 x 2	Aluminum w/ Rubber	KRSC10, Classic, Heritage
8-31139A	Rigid Soft Wheel	600	6 x 2	Monoprene (Soft)	KRSC carts, Classic, Heritage
8-31239A	Swivel Soft Wheel	600	6 x 2	Monoprene (Soft)	KRSC carts, Classic, Heritage
8-24239A	Swivel Soft Wheel with Lock	330	5 x 1.25	Monoprene (Soft)	KRA2005, KRA2007
8-24339A	Rigid Soft Wheel	330	5 x 1.25	Monoprene (Soft)	KRA2005, KRA2007

KACAP6BK

KACAP6BU

KACAP6RD

Custom Caster Bolt Covers

- Fits all *Snap-on* casters current models and most past models
- Caps fit all current *Snap-on* roll cabs
- Also fits the bolt on the caster horn found on all EPIQ and Masters series roll cabs
- Also fits Classic 6" x 2" caster bolt
- Machined aluminum with custom *Snap-on* wrench "S" marking
- Six-piece sets (two for each swivel caster one for each rigid)
- Includes set screw for positive attachment (includes Allen Wrench for install)

KACAP6BK Powder-Coated Black Caster Bolt Covers (6 pcs) Powder-coated black aluminum.

KACAP6BU Anodized Blue Caster Bolt Covers (6 pcs) Blue anodized aluminum.

KACAP6RD Anodized Red Caster Bolt Covers (6 pcs) Red anodized aluminum.

Heavy Duty Brass Replacement Locks

- Can be used to replace all *Snap-on* round key (K-series) locks
- Replace standard locks subject to abnormal usage, exposure to shop fluids or extreme temperature and humidity fluctuations
- Ideal for multi-shift/user situations
- Hard brass cylinder plug for a longer life cycle
- Highly finished brass cylinder plug for smoother operation
- More secure retention in the tool storage unit
- Tested to operate smoothly over 25,000 cycles
- 200 different cylinder plugs available as replacement items

K1HLA Heavy Duty Brass Lock One lock assembly with two keys.

K2HLA Heavy Duty Brass Lock Two keyed alike lock assemblies with two keys.

K2HLA

K3HLA Heavy Duty Brass Lock Three keyed alike lock assemblies with two keys.

K4HLA Heavy Duty Brass Lock Four keyed alike lock assemblies with two keys.

K5HLA Heavy Duty Brass Lock Five keyed alike lock assemblies with two keys.

K6HLA Heavy Duty Brass Lock Six keyed alike lock assemblies with two keys.

K7HLA Heavy Duty Brass Lock Seven keyed alike lock assemblies with two keys.

Tubular Lock Assemblies

- High security tubular tool storage locks with rotating collars are harder to pick and are more resistant to vandalism
- Key alike any number of *Snap-on* tool storage units
- Older units can be converted to this new style lock
- Each lock has an individual combination
- Lock kits include mounting nut and lock washer

K1LA Tubular Lock Assembly
One lock assembly with two keys.

K2LA Tubular Lock Assembly
Two keyed alike lock assemblies with two keys.

K3LA Tubular Lock Assembly
Three keyed alike lock assemblies with two keys.

K1LA

K4LA Tubular Lock Assembly
Four keyed alike lock assemblies with two keys.

K5LA Tubular Lock Assembly
Five keyed alike lock assemblies with two keys.

K6LA Tubular Lock Assembly
Six keyed alike lock assemblies with two keys.

K7LA Tubular Lock Assembly
Seven keyed alike lock assemblies with two keys.

Overview.....100

1/4" Drive 102
3/8" Drive 137
1/2" Drive 184
3/4" Drive..... 213
1" 1-1/2" 2-1/2" Drive 222
Wrenches 233
Torque..... 275
Screwdrivers..... 302
Pliers 333
Punches, Chisels, Hammers ... 350
General Hand Tools 357
Set Building 430

HAND TOOLS

SNAP-ON® TOOLS: BECAUSE PROS OPERATE ON A WHOLE OTHER LEVEL.

When you are the best, you demand the best. That's why, for 95 years now and counting, professional techs reach for *Snap-on* tools. Our hand tools deliver the quality, innovation and performance they need to get the job done – and done right – the first time and every time.

PRO POWER

No one's tougher on our tools than we are. Every Snap-on® hand tool not only meets industry standards – they go above and beyond.

STRONG AND LONG LASTING — Born of special steel with higher alloy content than most.

PRECISE FIT — Upheld to exacting tolerances during manufacture for a tight fit to fastener. We will not tolerate anything less.

CORROSION RESISTANT — Finished with Snap-on's signature nickel-chrome plating to prevent rust.

"Day in and day out, our service technicians rely on *Snap-on* tools to turn repairs around quickly and easily the first time – making our customers happy and our business more productive."

Michael Harris
Hayes, VA

Michael has:
3/8" drive bent flex-head
soft grip ratchet - FHBF80

PRO INNOVATION

More productive. More versatile. More comfortable to use. Since 1920, Snap-on has continued to refine even the most basic of hand tools. That's innovation.

FLANK DRIVE® WRENCHING SYSTEM — Torque turned up a notch. Add up to 15-20% more torque, all while preventing the rounding of fasteners.

VECTOREDGE™ CUTTERS AND TALON GRIP™ PLIERS — For cleaner cuts, more pulling power and increased durability – with greater comfort and leverage.

TECHANGLE® TORQUE WRENCH — Designed with aircraft technology, it's the most accurate way to achieve torque and angle tightening sequences.

PRO PERFORMANCE

Snap-on delivers performance when it matters. And when it comes to getting the job done quickly and accurately, no one outperforms us.

STRENGTH — Strength is our strong point: wrenches, ratchets and screwdrivers that provide durability and performance.

ACCESSIBILITY— In a tight spot? No problem. Snap-on gives you the ability to access and perform work in even the tightest of quarters.

VERSATILITY— If you need it, we have it. Our broad and deep hand tool lines ensure you always have the right tool for the job.

THE RIGHT TOOLS FOR THE TIGHT SPOTS.

Your jobs do not leave much room for error. And sometimes, they do not leave much room, period. So, when you are working in tight spots, you want to be working with Snap-on® tools. Our 1/4" drive tools make quick work of any problem – in even the most confined of spaces. Granted, no job is too small. But every so often, spaces are. That's why there's Snap-on.

SMALL SPACES, BIG PRODUCTION.

Squeeze the most productivity from your tools with our 1/4" ratchets and sockets. In low-profile, these tools allow techs to get into tight spaces – places most sockets and wrenches just cannot get to.

WOBBLE PLUS — The wobble function provides 16° of additional accessibility. Wobble Plus is designed for max versatility and flexibility, and is usable in both wobble and standard functionality.

T72

GT72

THL72

TL72

TLL72

TF72

THLF72

TX72

THLX72

DUAL 80 TECHNOLOGY

Dual 80® Technology Based Ratchets

Stop, Turn and Listen. A smoother, stronger ratchet. Try them to believe them.

***Dual 80* Technology Ratchets Feature:**

- 72-tooth gear
- Six teeth in contact with gear to provide strength and durability
- Up to 25% less ratcheting arc to engage the next gear tooth
- Sealed head keeps dirt and other contaminants out of the head mechanism



Stock No.	Description	Gear Teeth	Swing Arc	A	B	C	Repair Kit
T72	High Strength Standard Handle	72	5°	7/16	15/16	4 7/16	RKRT72A
GT72	High Strength Standard Handle	72	5°	7/16	15/16	4 7/16	RKRT72A
THL72	Soft Grip Long Handle	72	5°	7/16	15/16	6 7/8	RKRT72A
TL72	Long Standard Handle	72	5°	7/16	15/16	6 1/2	RKRT72A
TLL72	Extra Long Standard Handle	72	5°	7/16	15/16	9	RKRT72A
TF72*	Standard Handle Flex Head	72	5°	7/16	15/16	6 1/4	RKRT72A
THLF72*	Soft Grip Handle Flex Head	72	5°	7/16	15/16	8 1/4	RKRT72A
TX72**	Standard Handle Locking Flex Head	72	5°	7/16	15/16	6 1/4	RKRT72A
THLX72	Soft Grip Handle Locking Flex Head	72	5°	7/16	15/16	8 1/4	RKRT72A

ASME®/ANSI® B107.10
*Uses RKRT841JT Flex Joint Repair Kit.
**Uses RKRT841JT Flex Joint Repair Kit and RKRT841LM Locking Mechanism Repair Kit.
TH936-12 Soft Grip Replacement Handle.

⚠WARNING

- Do not use "cheater bars" on handles
- Read safety precautions on pages W1 to W4

RATCHETS



TR72

THR72

THRLF72

TRF72

TRLL72

DUAL 80 TECHNOLOGY

Dual 80® Technology Based Quick Release Ratchets

- Quick release button for rapid socket/accessory changes, even with greasy or oily hands
- Contoured handle for comfort and control
- Chrome finish for easy cleanup

Stock No.	Description	Gear Teeth	Swing Arc	A	B	C	Repair Kit
TR72	Standard Handle	72	5°	7/16	15/16	4 7/16	RKRTR72A
THR72*	Soft Grip Handle	72	5°	7/16	15/16	6 7/8	RKRTR72A
THRLF72*	Soft Grip Handle Flex Head	72	5°	7/16	15/16	8 1/4	RKRTR72A
TRF72	Standard Handle Flex Head	72	5°	7/16	15/16	6 1/4	RKRTR72A
TRLL72	Long Standard Handle	72	5°	7/16	15/16	9	RKRTR72A

ASME®/ANSI® B107.10
*TH936-12 Soft Grip Replacement Handle.

TKN72

THNF72

TN72

TS72

Round Head Ratchets

- Compact round head provides better access into tight quarters
- 72-tooth gear for 5˚ of swing arc means shorter movement between tooth engagement

Stock No.	Description	Gear Teeth	Swing Arc	A	B	C	Repair Kit
TKN72	Compact	72	5°	7/16	1 1/4	3 1/16	RKRTHNF72
THNF72*	Soft Grip Swivel Head	72	5°	7/16	1 1/4	6 7/8	RKRTHNF72
TN72	Standard Handle	72	5°	7/16	1 1/4	4 1/2	RKRTHNF72
TS72	Finger Tip Ratchet	72	5°	7/16	1 1/2	1 1/2	RKRTHNF72

ASME/ANSI B107.10
*TH936-12 Soft Grip Replacement Handle.

Dual 80® Technology Based Low-Profile Ratchet

- Square drive design works with low-profile sockets to access restricted clearance areas without loss of strength
- Thin handle cross section allows for increased accessibility in tight quarters
- *Dual 80* Technology requires less arc to engage the next gear tooth
- Six teeth in contact with gear to provide strength and durability



Stock No.	Drive Size	Description	Gear Teeth	Swing Arc	A	B	C
RAT72	11 mm Internal Hex	Low Profile	72	5°	3/8	15/16	4 7/8



Dual 80 Technology FOD (Foreign Object Damage) Ratchets

- Designed to help prevent FOD in sensitive work environments
- Coverplate and reverse lever permanently affixed to ratchet head with rivets to prevent chance of small parts debris

Stock No.	Description	Gear Teeth	Swing Arc	A	B	C
T72FOD	Standard Handle	72	5°	7/16	15/16	4 11/16
GT72FOD	Standard Handle	72	5°	7/16	15/16	4 11/16
TL72FOD	Long Standard Handle	72	5°	7/16	15/16	6 1/2
GTL72FOD	Long Standard Handle	72	5°	7/16	15/16	6 1/2



Hi-Lok® Ratchets

- Features a hole through the head and square drive so the fastener may be held steady with a hex wrench as the fastener's collar is tightened
- Sealed head keeps dirt and other contaminants out of the head mechanism
- For use with standard or *Hi-Lok* sockets
- 5° ratcheting arc provides shorter movement between tooth engagement

Stock No.	Description	Gear Teeth	Swing Arc	A	B	C	Repair Kit
TFY72	*Hi-Lok* Flex Head	72	5°	7/16	15/16	6 1/4	RKRTY72
TY72	*Hi-Lok* Standard	72	5°	7/16	15/16	4 5/8	RKRTY72

ASME®/ANSI® B107.10

⚠WARNING

- Do not use "cheater bars" on handles
- Read safety precautions on pages W1 to W4

RATCHETS

TMS70A



TM77



Ratchet Spinner

Stock No.	Description	A	B
TMS70A	Ratchet Spinner	1	7/8

ASME®/ANSI® B107.10

Ratchet Adaptor

Stock No.	Description	Gear Teeth	Swing Arc	A	B
TM77	Ratchet Adaptor	20	18°	15/16	1 5/8

ASME/ANSI B107.10

BREAKER BARS

TM10G

THBB10

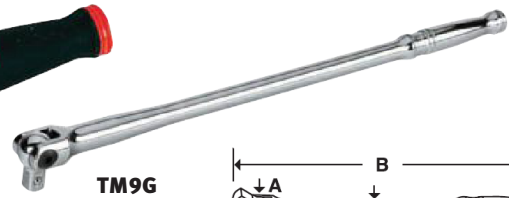

TM9G



Breaker Bars

Stock No.	Description	A	B	C	Repair Kit
TM10G*	Breaker Bar	5/8	6	5/16	RKBB1
THBB10	Soft Grip Handle	5/8	6 1/2	5/16	RKBB1
TM9G	Long Handle	5/8	9	5/16	RKBB1

**ASME/ANSI* B107.10

DRIVE HANDLES

SGT4BR

SGTL4BR



TM4CSA

Handled Drivers/Instinct® Handle

- Provides maximum turning power and increased comfort
- Six specially designed curves and flutes provide fingertip control and aid in spinning
- Nickel-chrome plating helps protect against corrosion and makes cleaning easy

Stock No.	A	B	C
SGT4BR	5/16	2	6 13/16
SGTL4BR	5/16	3 1/4	8 1/8

SGTL4BR features a locking pin for better socket retention.

Handled Drivers/Square Drive Handle

- Internal square drive in handle allows use with various handles

Stock No.	A	B	C
TM4CSA	5/16	2 3/8	6
TM9CSA	5/16	6 3/8	10

TM40ASA

Handled Driver/Stubby

Stock No.	C	E
TM40ASA	2 1/8	1 3/4



TMR4

TM62B

TMRT8

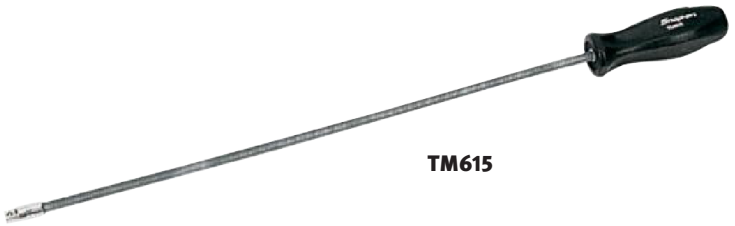

TM615

Ratcheting Driver

- Use with any 1/4" drive socket to create a ratcheting nut driver
- Three-position ratchet mechanism works in forward, reverse or lock out the ratcheting action completely

Stock No.	Color	B	C	E
TMR4	Black	3 7/8	8 31/32	5 3/32
TMR4O	Orange	3 7/8	8 31/32	5 3/32
TMR4G	Green	3 7/8	8 31/32	5 3/32
TMRT8	Black	8	10	2

Flexible Drivers

- For low-torque applications

Stock No.	A	B	C
TM62B	1/4	2 7/32	6 3/4
TM63A	1/4	4 21/32	9 3/16
TM615	1/4	15	18 5/8

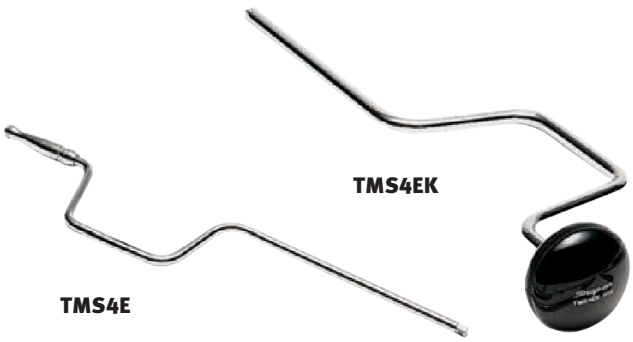

TMS4EK

TMS4E

TM5





Speeder

Stock No.	A	B	C	D
TMS4E	5/16	7 1/8	3	16
TMS4EK	5/16	7 1/8	3	15 1/32

Sliding T-handle

- Designed for heavier applications
- For use as a T-handle or offset wrench
- Spring and friction ball holds head in position

Stock No.	A	B	C
TM5	13/16	5/16	4 1/2

ASME®/ANSI® B107.10

⚠WARNING

- Do not use "cheater bars" on handles
- Do not use chrome or industrial finish hand tools with impact drivers
- Read safety precautions on pages W1 to W4

EXTENSIONS

106BTMX

GTMXK80

Knurled

Set Contains: 106BTMX†

Stock No.	Industrial Stock No.	A	B	
TMX1*	—	5/16	1 1/4	•
TMXK2**	GTMX2*	5/16	2	•
TMXK3	—	5/16	3	
TMXK4	GTMX4*	5/16	4	•
TMXK60**	GTMX60*	5/16	6	•
TMXK80**	GTMXK80	5/16	8	•
TMXK110	GTMXK110	5/16	11	•
TMXK140	GTMX140*	5/16	14	
TMX240*	—	3/8	24	
TMX360	—	3/8	36	

*Not knurled
**ASME®/ANS®/ B107.10

Set shown includes storage tray
†Industrial finish products not included in the set

103TMXKLA

Locking – Knurled

- Quick-release sleeve releases socket quickly and easily
- Knurling at the drive end provides for easy fingertip turning

Set Contains: 103TMXKLA

Stock No.	A	B	
TMXKL2	5/16	2	
TMXKL60A	5/16	6	•
TMXKL110A	5/16	11	•
TMXKL240A	3/8	24	•

Set shown includes storage tray

TMXKLP Locking Pins
- Locking pins for TMXKLP Series Extensions

TMXKLRK Repair Kit
- Repair kit for TMXKLP Series Extensions
- Five-pack

106ATMXWP

106ATMXW

Wobble Plus

- Provides 16° of additional accessibility
- Usable in both wobble and rigid functionality

Set Contains: 106ATMXWP

Stock No.	A	B	
TMXWP1*	5/16	1 1/4	•
TMXWP2	5/16	2	•
TMXWP4	5/16	4	•
TMXWP6	5/16	6	•
TMXWP8	5/16	8	•
TMXWP11	5/16	11	•

*Not knurled

Set shown includes storage tray

Wobble

- Provides 16° of additional accessibility
- Knurled shanks for easy fingertip turning

Set Contains: 106ATMXW

Stock No.	A	B	
TMXW1*	5/16	1 1/4	•
TMXWK2	5/16	2	•
TMXWK4	5/16	4	•
TMXWK60	5/16	6	•
TMXWK80	5/16	8	•
TMXWK110	5/16	11	•

*Not knurled

Set shown includes storage tray

TM61A



Flexible

Stock No.	A	B	C
TM61A	5/16	5	6

ASME/ANSI B107.10

Connectors

TZ1 Extension Connector

- 1/4" drive extension connector adds versatility to extensions, breaker bars, ratchets and crowfoot wrenches
- Connect one or more tools for a variety of ways to reach limited access fasteners
- For use in marine, heavy truck, plumbing and manufacturing applications

TZ2 Extension Connector Set

- Set of two TZ1

TZ1

SOCKET/RATCHET ACCESSORIES

1206GS



Square Drive Adaptors

Stock No.	Industrial Stock No.	A	B	C	D
—	GFAT1E	3/8	1/4	11/16	1 1/4
TA3	GTA3	1/4	3/8	1/2	15/16

1206GS Combination Drive Adaptor Set

- Includes 1/4" drive GFAT1E and TA3 adaptors, 3/8" drive A2A and GSAF1E adaptors and 1/2" drive GLA12B and GLAS1E adaptors (6pc) in storage tray



103UFTS

Universal Joints

TMU8B Universal Joint

- Universal joints help increase access to hard-to-reach fastener applications
- Pins in the universal joint are laser-welded and will not "walk" out over time

TMUL8 Locking Collar Universal Joint

- Locking pin to ensure better socket retention

Stock No.	A	B
TMU8B	1/2	1 5/16
TMUL8	1/2	2 1/4

103UFTS Combination Drive Universal Joint Set

- Includes 1/4" drive TMU8B, 3/8" drive FU8A and 1/2" drive S8
- Universal joints 3pc in storage tray



TMXM17

Magnetic Adaptors

Stock No.	A	B	C
TMXM17	7/32	13/32	1 21/32
TMXM114	7/32	9/32	1 17/32

GMB3042



Hex-To-Square Adaptors

- 1/4" hex size; 1" length of hex

Stock No.	A	B
GMB3041*	Friction Ball	1
GMB3042	Friction Ball	2
GMB3046	Friction Ball	6

*Insert bit style, non-impact

⚠WARNING

- Do not use chrome or industrial finish hand tools with impact drivers
- Wobble extensions have about half the torque strength of extensions with conventional squares
- Read safety precautions on pages W1 to W4

FLANK DRIVE® SOCKETS



112TMMY

TMMD14

110TMY

TMD16

GTMD16

Shallow, mm

Set Contains: 112TMMY / 111TMMDY

mm	6	12	A	B	C	D	E	6	12
4	TMM4*	–	6.7	12.1	13.3	22.2	4.6		
4.5	TMM4.5*	–	7.2	12.1	13.3	22.2	4.3		
5	TMM5*	TMMD5*	7.7	12.1	13.3	22.2	4.3	•	•
5.5	TMM5.5	TMMD5.5	8.3	12.1	13.3	22.2	4.6	•	•
6	TMM6	TMMD6	9.3	12.1	13.3	22.2	5.6	•	•
7	TMM7	TMMD7	10.5	12.1	13.3	22.2	6.1	•	•
8	TMM8	TMMD8	11.5	12.1	13.3	22.2	6.9	•	•
9	TMM9	TMMD9	12.7	12.1	13.3	22.2	7.4	•	•
10	TMM10	TMMD10	13.2	13.2	13.3	22.2	7.4	•	•
11	TMM11	TMMD11	15.2	14.6	13.3	22.2	9.4	•	•
12	TMM12	TMMD12	16.5	15.6	13.3	22.2	9.4	•	•
13	TMM13	TMMD13	17.6	16.7	13.3	22.2	9.4	•	•
14	TMM14	TMMD14	18.8	17.8	14.1	22.2	9.7	•	•
15	TMM15	–	20.4	19.4	14.1	23.0	9.1	•	
16	TMM16	–	21.0	20.2	16.1	25.0	10.2		

*Conventional hex ASME® B107.5m

Sets shown include magnetic storage tray

Shallow, inches

Set Contains: 110TMY / 110TMDY

11	6	12	6	12	A	B	C	D	E	6	12
1/8	TM04	–	–	–	7/32	7/16	1/2	7/8	1/8		
5/32	TM05*	–	–	–	9/32	15/32	1/2	7/8	5/32		
3/16	TM6*	TMD6*	GTM6	GTMD6	9/32	15/32	1/2	7/8	5/32	•	•
7/32	TM7*	TMD7*	GTM7	GTMD7	11/32	15/32	1/2	7/8	3/16	•	•
1/4	TM8	TMD8	GTM8	GTMD8	3/8	15/32	1/2	7/8	7/32	•	•
9/32	TM9	TMD9	GTM9	GTMD9	13/32	15/32	1/2	7/8	1/4	•	•
5/16	TM10	TMD10	GTM10	GTMD10	15/32	15/32	1/2	7/8	9/32	•	•
11/32	TM11	TMD11	GTM11	GTMD11	1/2	15/32	5/16	7/8	9/32	•	•
3/8	TM12	TMD12	GTM12	GTMD12	17/32	1/2	1/2	7/8	9/32	•	•
7/16	TM14	TMD14	GTM14	GTMD14	19/32	9/16	1/2	7/8	3/8	•	•
1/2	TM16	TMD16	GTM16	GTMD16	11/16	21/32	1/2	7/8	3/8	•	•
9/16	TM18	TMD18	–	GTMD18	25/32	23/32	1/2	29/32	3/8	•	•
5/8	TM20	–	–	–	27/32	25/32	19/32	31/32	13/32		

*Conventional hex *ASME* B107.1

Sets shown include magnetic storage tray

112TMMSY

TMMDS14

110TMSY

TMDS14

Semi Deep, mm

Set Contains: 112TMMSY / 112TMMDSY

mm	6	12	A	B	C	D	E	6	12
5	TMMS5*	TMMDS5*	7.7	12.1	22.9	31.8	5.1	•	•
5.5	TMMS5.5*	TMMDS5.5	8.3	12.1	22.9	31.8	5.3	•	•
6	TMMS6	TMMDS6	9.3	12.1	22.9	31.8	5.8	•	•
7	TMMS7	TMMDS7	10.5	12.1	22.9	31.8	6.1	•	•
8	TMMS8	TMMDS8	11.5	12.1	18.4	31.8	6.9	•	•
9	TMMS9	TMMDS9	12.7	12.1	18.4	31.8	7.4	•	•
10	TMMS10	TMMDS10	14.0	13.2	18.4	31.8	7.4	•	•
11	TMMS11	TMMDS11	15.4	14.6	18.4	31.8	9.4	•	•
12	TMMS12	TMMDS12	16.5	15.6	18.4	31.8	9.4	•	•
13	TMMS13	TMMDS13	17.6	16.7	18.4	31.8	9.4	•	•
14	TMMS14	TMMDS14	18.8	17.8	18.4	31.8	9.7	•	•
15	TMMS15	TMMDS15	20.4	19.4	18.4	31.8	9.7	•	•

*Conventional hex

Sets shown include magnetic storage tray

Semi Deep, inches

Set Contains: 110TMSY / 110TMDSY

11	6	12	A	B	C	D	E	6	12
3/16	TMS6*	TMDS6*	5/16	15/32	29/32	1 1/4	7/32	•	•
7/32	TMS7*	TMDS7*	11/32	15/32	29/32	1 1/4	7/32	•	•
1/4	TMS8	TMDS8	3/8	15/32	29/32	1 1/4	1/4	•	•
9/32	TMS9	TMDS9	13/32	15/32	23/32	1 1/4	1/4	•	•
5/16	TMS10	TMDS10	15/32	15/32	23/32	1 1/4	9/32	•	•
11/32	TMS11	TMDS11	1/2	15/32	23/32	1 1/4	5/16	•	•
3/8	TMS12	TMDS12	9/16	1/2	23/32	1 1/4	5/16	•	•
7/16	TMS14	TMDS14	5/8	19/32	23/32	1 1/4	3/8	•	•
1/2	TMS16	TMDS16	11/16	21/32	23/32	1 1/4	3/8	•	•
9/16	TMS18	TMDS18	3/4	23/32	23/32	1 1/4	3/8	•	•

*Conventional hex *ASME* B107.1

Sets shown include magnetic storage tray



STMMD14

112STMMY

Deep, mm

Set Contains: 112STMMY / 111STMMDY

mm	6	12	A	B	C	D	E	6	12
4	STMM4*	–	6.7	12.1	42.2	50.8	4.6		
4.5	STMM4.5*	–	7.2	12.1	42.2	50.8	4.6		
5	STMM5*	STMMD5*	7.7	12.1	42.2	50.8	5.1	•	•
5.5	STMM5.5	STMMD5.5	8.3	12.1	42.2	50.8	5.3	•	•
6	STMM6	STMMD6	9.3	12.1	42.2	50.8	5.8	•	•
7	STMM7	STMMD7	10.5	12.1	42.2	50.8	6.1	•	•
8	STMM8	STMMD8	11.5	12.1	42.2	50.8	6.9	•	•
9	STMM9	STMMD9	12.7	12.1	38.1	50.8	7.4	•	•
10	STMM10	STMMD10	14.0	13.2	38.1	50.8	7.4	•	•
11	STMM11	STMMD11	15.2	14.6	38.1	50.8	9.4	•	•
12	STMM12	STMMD12	16.5	15.6	38.1	50.8	9.4	•	•
13	STMM13	STMMD13	17.6	16.7	38.1	50.8	9.4	•	•
14	STMM14	STMMD14	18.8	17.8	38.1	50.8	9.7	•	•
15	STMM15	–	20.4	19.4	38.1	50.8	9.1	•	

*Conventional hex

Sets shown include magnetic storage tray

STMD16

GSTMD14

110STMY

Deep, inches

Set Contains: 110STMY / 110STMDY

	6	12	6	12	A	B	C	D	E	6	12
1/8	STM04*	–	–	–	7/32	7/16	1 21/32	2	1/8		
5/32	STM05*	–	–	–	1/4	15/32	1 21/32	2	3/16		
3/16	STM6*	STMD6*	GSTM6	GSTMD6*	5/16	15/32	1 21/32	2	3/16	•	•
7/32	STM7*	STMD7*	GSTM7	GSTMD7*	11/32	15/32	1 21/32	2	7/32	•	•
1/4	STM8	STMD8	GSTM8	GSTMD8	3/8	15/32	1 32/32	2	7/32	•	•
9/32	STM9	STMD9	GSTM9	GSTMD9**	13/32	15/32	1 21/32	2	1/4	•	•
5/16	STM10	STMD10	GSTM10	GSTMD10**	15/32	15/32	1 21/32	2	7/32	•	•
11/32	STM11	STMD11	GSTM11	GSTMD11	1/2	15/32	1 21/32	2	9/32	•	•
3/8	STM12	STMD12	GSTM12	GSTMD12	17/32	9/16	1 21/32	2	9/32	•	•
7/16	STM14	STMD14	GSTM14	GSTMD14	5/8	9/16	1 21/32	2	3/8	•	•
1/2	STM16	STMD16	GSTM16	GSTMD16	11/16	21/32	1 21/32	2	3/8	•	•
9/16	STM18	STMD18	–	GSTMD18	3/4	23/32	1 21/32	2	3/8	•	•

*Conventional hex
**Larger bolt clearance diameter for servicing aerospace fastener

Sets shown include magnetic storage tray

Long, mm

Set Contains: 102STMML

mm	6	A	B	C	D	E	6
10	STMML10	14	13.2	33.0	101.6	7.4	•
11	STMML11	15.2	14.6	33.0	101.6	9.4	•

Application: For bumper cover bolts found on most European, Asian and US vehicles.

Set shown includes storage tray

102STMML

⚠WARNING

- Do not use chrome or industrial finish hand tools with impact drivers
- Read safety precautions on pages W1 to W4

FLANK DRIVE® SOCKETS

120STTM

124STTMM

Shallow/Deep Combination Sets

120STTM 6-Point Shallow/Deep Set
- TM6–TM18 shallow sockets and STM6–STM18 deep sockets
- 20pc, 3/16"–9/16"
- Includes magnetic storage tray

124STTMM Metric 6-Point Shallow/Deep Set
- TMM5–TMM15 shallow sockets plus STMM5–STMM15 deep sockets
- 24pc, 5 mm–15 mm
- Includes magnetic storage tray

FLANK DRIVE LOW-PROFILE SOCKETS

RTM9 RTSM14 RTSM15

112RTM

110RTSMA

RT101



112RT

110RT

Low Profile, mm

mm	6	12	A	B	C	D	E	Set Contains: 112RTSM 6	110RTSMA 6	112RTM 12
5	RTSM5	RTM5	7.7	12.1	—	20.2	2.2	●	●	●
5.5	RTSM5.5	RTM5.5	8.3	12.1	—	20.2	2.6	●	●	●
6	RTSM6	RTM6	9.3	12.1	—	19.3	2.7	●	●	●
7	RTSM7	RTM7	10.5	12.1	—	19.0	2.8	●	●	●
8	RTSM8	RTM8	11.5	12.1	—	19.0	3.6	●	●	●
9	RTSM9	RTM9	12.7	12.1	9.2	18.7	3.9	●	●	●
10	RTSM10	RTM10	14.0	12.1	9.4	19.0	4.7	●	●	●
11	RTSM11	RTM11	15.4	12.1	6.2	17.3	4.5	●	●	●
12	RTSM12	RTM12	16.5	12.1	6.1	17.8	4.9	●	●	●
13	RTSM13	RTM13	17.6	12.1	5.9	18.1	5.1	●	●	●
14	RTSM14	–	18.7	12.1	6.4	19.3	5.8			
15	RTSM15	–	20.3	12.1	6.3	20.3	6.4			
	RAT72	–	Low-Profile Ratchet					●		●
	RTMBS8	–	Low-Profile Magnetic Bit Holder					●		●

Sets shown include storage tray

Low Profile, inches

11	12	A	B	C	D	E	Set Contains: 112RT 12	110RT 12
3/16	RT61	5/16	15/32	11/32	25/32	3/32	●	●
7/32	RT71	11/32	15/32	3/8	13/16	3/32	●	●
1/4	RT81	3/8	15/32	5/16	3/4	1/8	●	●
9/32	RT91	13/32	15/32	5/16	3/4	1/8	●	●
5/16	RT101	15/32	15/32	5/16	3/4	5/32	●	●
11/32	RT111	1/2	15/32	13/32	9/32	3/16	●	●
3/8	RT121	17/32	15/32	9/32	11/16	3/16	●	●
7/16	RT141	19/32	15/32	1/4	11/16	3/16	●	●
1/2	RT161	11/16	15/32	7/32	23/32	7/32	●	●
9/16	RT181	3/4	15/32	1/4	3/4	1/4	●	●
	RAT72	Low-Profile Ratchet					●	
	RTMBS8	Low-Profile Magnetic Bit Holder					●	

Sets shown include storage tray

RTMBS8

SDMS17

Stubby Bits and Bit Holder

	Stock No.	Size	Set Contains: SDMS17
Flat Tip	SDMS213	1/4"	•
Phillips	SDMS222IR	#2	•
Metric Hex	SDMSM3	3 mm	•
	SDMSM4	4 mm	•
	SDMSM5	5 mm	•
	SDMSM6	6 mm	•
	SDMSM8	8 mm	•
Inch Hex	SDMS8	1/8"	•
	SDMS9	9/64"	•
	SDMS10	5/32"	•
	SDMS12	3/16"	•
	SDMS16	1/4"	•
Torx	SDMST15	T15	•
	SDMST20	T20	•
	SDMST25	T25	•
	SDMST27	T27	•
	SDMST30	T30	•

RTMBS8 Low-Profile Magnetic Bit Holder
- Magnetic Bit Holder for the Low-Profile RAT72 Ratcheting Wrench
- Special alloy steel provides the highest match of strength and durability
- Nickel-chrome plating provides corrosion resistance
- Holds any 1/4" shank bit: fractional and metric hex bits, TORX® and ball *TORX*, Phillips® and straight bits
- Fits in any 11 mm ratcheting wrench

Applications:
Perfect for tight and compact applications found on automotive, motorcycle, ATV and aviation. Automotive applications include: heater boxes and motor actuators in dash of vehicle, air conditioning work and on top of dashboard where the windshield meets the dash.

FLANK DRIVE UNIVERSAL SOCKETS



TMUM8A

111TMUSMA

Shallow Universal, mm

mm	6	12	A	B	D	E	Set Contains: 111TMUSMA 6	106TMUSMA 6
5	TMUSM5A*	TMUM5A*	8.1	12.7	29.2	3.3		
5.5	TMUSM5.5A	–	8.5	12.7	29.2	3.6	•	
6	TMUSM6A	TMUM6A	9.6	12.7	29.7	3.8	•	
7	TMUSM7A	TMUM7A	10.7	12.7	30.5	4.3	•	
8	TMUSM8A	TMUM8A	11.8	12.7	30.5	4.8	•	•
9	TMUSM9A	TMUM9A	12.7	12.7	31.2	4.8	•	
10	TMUSM10A	TMUM10A	14.0	12.7	32.5	5.8	•	•
11	TMUSM11A	–	15.4	12.7	33.0	6.6	•	
12	TMUSM12A	TMUM12A	16.5	12.7	34.5	6.9	•	•
13	TMUSM13A	TMUM13A	17.3	12.7	36.8	7.6	•	•
14	TMUSM14A	–	18.8	12.7	38.6	8.6	•	•
15	TMUSM15A	–	20.4	12.7	41.1	8.9	•	•

*Conventional hex

Sets shown include storage tray

⚠WARNING

- Do not use chrome or industrial finish hand tools with impact drivers
- Do not use "cheater bars" on handles
- Read safety precautions on pages W1 to W4

FLANK DRIVE® UNIVERSAL SOCKETS

106TMUSA

TMUS161A

GTMU141A



Shallow Universal, inches

Set Contains: 106TMUSA								106TMUA	
11	6	12	12	A	B	D	E	6	12
3/16	–	TMU61A*	–	19/64	1/2	1 17/64	1/4		
7/32	–	TMU71A*	GTMU71A	11/32	1/2	1 17/64	1/4		
1/4	TMUS81A	TMU81B	–	3/8	1/2	1 17/64	1/4	•	•
9/32	–	TMU91A	–	27/64	1/2	1 5/16	9/32		
5/16	TMUS101A	TMU101A	–	15/32	1/2	1 11/32	9/32	•	•
11/32	–	TMU111A	–	1/2	1/2	1 3/8	9/32		
3/8	TMUS121A	TMU121A	–	17/32	1/2	1 27/64	9/32	•	•
7/16	TMUS141A	TMU141A	GTMU141A	19/32	1/2	1 29/64	13/32	•	•
1/2	TMUS161A	TMU161A	–	11/16	1/2	1 33/64	13/32	•	•
9/16	TMUS181A	TMU181A	–	3/4	1/2	1 35/64	13/32	•	•

*Conventional hex

Sets shown include storage tray

STMUM10A

GSTMU101A

Deep Universal, mm

mm	12	A	B	D	E
10	STMUM10A	14.0	12.7	41.4	5.8

Deep Universal, inches

11	12	A	B	D	E
5/16	GSTMU101A	15/32	15/32	1 11/16	9/32

TORX® SOCKETS

213AFLEY



STLE70

TORX/Shallow

#	Stock No.	A	B	C
E4	TLE40A	7/16	7/8	17/64
E5	TLE50A	7/16	7/8	19/64
E6	TLE60A	7/16	7/8	21/64
E7	TLE70A	7/16	7/8	23/64
E8	TLE80A	7/16	7/8	27/64
E10	TLE100A	1/2	7/8	7/16

Note: Sets shown include magnetic storage tray

213AFLEY Combination Drive Shallow *TORX* Set
Includes 1/4" drive TLE40A–TLE100A, 3/8" drive FLE110A–FLE140A and 1/2" drive SLE160A–SLE240 (13pc) (E4 to E24).

210AFLEY Combination Drive Shallow *TORX* Set
1/4" drive TLE40A–TLE80A plus 3/8" drive FLE100A–FLE180A (except FLE110A) (10pc) (E4–E18).

TORX/Deep

#	Stock No.	A	B	C
E4	STLE40	15/32	9/32	2
E5	STLE50	15/32	5/16	2
E7	STLE70	31/64	3/8	2
E8	STLE80	15/16	13/32	2

STLE70 Deep *TORX* Socket
- For removing and installing vacuum pumps on BMW® N63 V8 engines without removing the catalytic converter, saving technician an average of two hours



106RTLE

Low-Profile Inverted *TORX*

#	Stock No.	A (mm)	B (mm)	C (mm)	Set Contains: 106RTLE
E4	RTLE40	12.1	6.7	16.5	•
E5	RTLE50	12.1	7.7	16.5	•
E6	RTLE60	12.1	8.4	16.5	•
E7	RTLE70	12.1	9.3	16.5	•
E8	RTLE80	12.1	10.5	16.6	•
E10	RTLE100	12.1	12.1	17.4	•

Set shown includes storage tray



TSE120

TORX/Universal

#	Stock No.	A	B	D
E8	TSE80	1/2	13/32	1 3/8
E10	TSE100	1/2	1/2	1 3/8
E12	TSE120	1/2	1/2	1 3/8

TSE80 Universal *TORX* Socket

Applications: Mercedes-Benz® turbo chargers, crankshaft position sensor, sensors and intake bolts, bell housing bolts and ignitions switch.

TSE100 and TSE120 Universal *TORX* Socket

Applications: *Mercedes-Benz* oil pan bolts, interior and engine fasteners, water pumps, power steering pumps and engine covers on newer models.

FLANK DRIVE® HIGH-PERFORMANCE SOCKETS



TDHU101A

Universal, inches

Chrome tools comply with Military Spec. MS-33787 and MIL-W-8982. The unique spline wrenching configuration can also be used on ordinary six- and 12-point fasteners with an advantage similar to the Snap-on® *Flank Drive* wrenching system.

	12	A	B	D	E
1/4	TDHU81A	3/8	1/2	1 15/64	1/4
5/16	TDHU101A	29/64	1/2	1 23/64	9/32
3/8	TDHU121A	17/32	1/2	1 15/32	11/32

WARNING

- Do not use chrome or industrial finish hand tools with impact drivers
- Read safety precautions on pages W1 to W4

SPLINE SOCKETS

Snap-on® spline wrenching tools have been developed to service high tensile strength spline nuts and bolts widely used on both military and commercial aircraft. Precise, radial spline teeth engage the fastener teeth over a wider area to minimize stress, and allow application of high torque to reduce risk of damage to the fastener or to the tool.

Chrome tools comply with AS954, Military Spec. MS-33787 and MIL-W-8982. The unique spline wrenching configuration can also be used on ordinary six- and 12-point fasteners with an advantage similar to the *Snap-on* Flank Drive® wrenching system.



209TFES

TES10B

Shallow, inches

		Stock No.	A	B	C	D	E
#7	7/32	TES7B	11/32	7/16	15/32	15/16	7/32
#8	1/4	TES8B	3/8	7/16	15/32	15/16	9/32
#9	9/32	TES9B	7/16	7/16	—	15/16	—
#10	5/16	TES10B	15/32	15/32	—	15/16	11/32
#12	3/8	TES12	35/64	35/64	19/32	59/64	23/64
#14	7/16	TES14	5/8	39/64	23/32	1 3/64	7/16

209TFES Shallow Spline Socket Set
- Includes 1/4" drive TES7B–TES10B and 3/8" drive FES120B–FES200B Shallow Spline Sockets (9pc) (#7–#20, 7/32"–5/8") in magnetic socket tray

207TFEL

TEL10B

Deep, inches

		Stock No.	A	B	C	D	E
#7	7/32	TEL7B	11/32	7/16	1 17/32	2	7/32
#8	1/4	TEL8B	3/8	7/16	1 17/32	2	9/32
#10	5/16	TEL10B	15/32	15/32	—	2	11/32

207TFEL Deep Spline Socket Set
- Includes 1/4" drive TEL7B–TEL10B and 3/8" drive FEL120B–FEL200B Deep Spline Sockets (7pc) (#7–#20, 7/32"–5/8") in magnetic socket tray

Deep, mm

	mm	Stock No.	A	B	C	D	E
#7	7	TELM7A	10.4	10.9	36.3	50.8	7.3
#8	8	TELM8A	11.7	11.7	36.3	50.8	8.8

TESU10



Shallow Universal, inches

		Stock No.	A	B	D	E
#8	1/4	TESU8	3/8	1/2	1 15/64	17/64
#10	5/16	TESU10	29/64	1/2	1 23/64	21/64

SPECIAL APPLICATION SOCKETS

TM412



Double Square

	Stock No.	A	B	C	D	E
1/4	TM408	15/32	15/32	17/32	7/8	1/4
5/16	TM410	9/16	17/32	17/32	7/8	9/32
3/8	TM412	21/32	5/8	17/32	7/8	5/16

PMP303



Metric Pipe Plug Socket

- Used to adjust the intake and exhaust valve rocker arms on Mercury Marine® four-stroke outboard motors
- Motor sizes: 10, 15, 20, 25 and 30 hp

mm	Stock No.	A	B
3	PMP303	12.1	22.2

SPECIAL APPLICATION SOCKETS

106FLIPSET

S6810

106FLIPSET Metric Flip Socket Set

- Manufactured from special alloy steel, precision forged and heat treated for optimum strength and durability
- Double hex (12-point) allows socket to engage single hex fastener every 30° rather than every 60°, allowing for better access in restricted areas
- Great starter set for use with cordless screwdrivers

Set includes these tools:

S6810 Flip Socket, 8 mm/10 mm:

- 8 mm and 10 mm Flip Socket
- For removing and installing underbelly pans on various vehicles
- BMW® vehicles use 30 fasteners that are a combination of 8 mm and 10 mm that hold the under belly pans on various vehicles. You have the convenience of one tool to work on both sizes
- Lexus® vehicles use 10 mm fasteners
- Infiniti® and Mercedes® vehicles use 8 mm fasteners
- Splash shields on Chevrolet® Cruze® vehicles and Buick® Verano® vehicles use 8 mm fasteners
- Overall length 1.44"

S6911 9 mm/11 mm Flip Socket: use on 9 mm and 11 mm fasteners found in applications for European vehicles

S61214 12 mm/14 mm Flip Socket: use on 12 mm and 14 mm fasteners found in numerous applications on Asian vehicles

S61315 13 mm/15 mm Flip Socket: use on 13 mm and 15 mm fasteners found in numerous applications on US vehicles

GMB3042 Hex-to-Square Adaptor (2" long)

GMB3046 Hex-to-Square Adaptor (6" long)

TORX® BIT SOCKETS



212EFTXY

GTTX15E

105TUTX

TORX/Standard

#	Stock No.	Stock No.	A	B
T8	TTX8E	GTTX8E	1 9/16	TTX8E2
T10	TTX10E	GTTX10E	1 9/16	TTX10E2
T15	TTX15E	GTTX15E	1 9/16	TTX15E2
T20	TTX20E	GTTX20E	1 9/16	TTX20E2
T25	TTX25E	GTTX25E	1 9/16	TTX25E2
T27	TTX27E	–	1 9/16	FTX27E2
T30	TTX30E	–	1 9/16	FTX30E2
T40	TTX40E	–	1 9/16	FTX40E2

Sets shown include storage tray

212EFTXY Combination *TORX* Set

- Includes 1/4" drive TTX8E–TTX25E *TORX* Drivers plus 3/8" drive FTX27E–FTX55E *TORX* Drivers and FTX47E GM® style Driver (12pc) (T8–T55 plus *GM* style T47) in storage tray

TORX/Stubby Universal

#	Stock No.	A	Set Contains: 105TUTX
T20	TUTX20E	1 3/4	•
T25	TUTX25E	1 3/4	•
T27	TUTX27E	1 3/4	•
T30	TUTX30E	1 3/4	•
T40	TUTX40E	1 3/4	•

Set shown includes storage tray

105TUTX Applications: T40 for Porsche® 2005 and newer 911, Boxster® and Cayenne® for ignition coil bolts. T30 for Volvo® turbo return lines. T30 for Honda® airbag control module inside passenger compartment of dashboard. T30 for pump alignment on Mitsubishi® F4A51 transmissions (97 and later). Numerous other applications for *Mercedes* that require a stubby *TORX* where a regular *TORX* bit socket will not fit in T20, T25 and T27.

⚠WARNING

- Do not use chrome or industrial finish hand tools with impact drivers
- Read safety precautions on pages W1 to W4

TORX® BIT SOCKETS

210EFTXL



209EFTXBY

TORX/Long

#	Stock No.	A	B
T8	TTXL8E	4 1/16	TTXL8E2
T10	TTXL10E	4 1/16	TTXL10E2
T15	TTXL15E	4 1/16	TTXL15E2
T20	TTXL20E	4 1/16	TTXL20E2
T25	TTXL25E	4 1/16	TTXL25E2

210EFTXL Combination Long *TORX* Set
- Includes 1/4" drive TTXL8E–TTX25LE *TORX* Drivers plus 3/8" drive FTXL27E–FTX55LE *TORX* Drivers (10 pcs) (T8–T55) in storage tray

TORX/Heavy Duty Removal

#	Stock No.	A	B
T15	TTXB15E	1 9/16	TTXB15E2
T20	TTXB20E	1 9/16	TTXB20E2
T25	TTXB25E	1 9/16	TTXB25E2

209EFTXBY Heavy Duty Removal *TORX* Set
- Includes 1/4" drive TTXB15E–TTXB25E *TORX* Drivers plus 3/8"drive FTXB27E–FTXB55E *TORX* Drivers (9 pcs) (T15–T55) in magnetic storage tray

210EFTXRY

TORX/Tamper Resistant

#	Stock No.	A	B
T8	TTXR8E	1 9/16	TTXR8E2
T10	TTXR10E	1 9/16	TTXR10E2
T15	TTXR15E	1 9/16	TTXR15E2
T20	TTXR20E	1 9/16	TTXR20E2
T25	TTXR25E	1 9/16	TTXR25E2
T40	TTXR40E	2 1/8	TTXR40E2

210EFTXRY Tamper Resistant Combination *TORX* Set
- Includes 1/4" drive TTXR8E–TTXR25E *TORX* Drivers plus 3/8" drive FTXR27E–FTXR50E *TORX* Drivers (10 pcs) (T8–T50) in magnetic storage tray

TORX Plus®

TORX Plus fasteners may be found in almost all vehicles from the 1999 model year to present. Common applications include GM® transmissions bell housing bolts and Ford® seat belt anchors. T27IP size can be used to service *Ford* Taurus and Sable vehicles front spring shields. Use of a standard *TORX* driver on *TORX Plus* fasteners may result in a rounded out fastener head or damaged driver.

211EFTXTPY

#	Stock No.	A	B
8IP	TTX8TPE	1 9/16	TTX8TPE2
10IP	TTX10TPE	1 9/16	TTX10TPE2
15IP	TTX15TPE	1 9/16	TTX15TPE2
20IP	TTX20TPE	1 9/16	TTX20TPE2
25IP	TTX25TPE	1 9/16	TTX25TPE2

211EFTXTPY Combination Drive *TORX Plus* Set
- Includes 1/4" drive TTX8TPE–TTX25TPE Drivers plus 3/8" drive FTX27TPE–FTX55TPE Drivers (11 pcs) (8IP–55IP) in magnetic storage tray. *TORX Plus* fasteners may be found in almost all vehicles from the 1999 model year to present. Common applications include *GM* transmission bell housing bolts and *Ford* seat belt anchors. Use of a standard *TORX* Driver on *TORX Plus* fasteners may result in a rounded out fastener head or damaged driver

TORX Plus®/Tamper Resistant

Five-lobe configuration. Two-piece pinless design holds bit securely in socket while facilitating quick bit replacement. Cold formed socket delivers a strong, durable tool. Chrome plating resists corrosion and cleans easily.



211EFTXRTPY

#	Stock No.	A	B
8IPR	TTXR8TPE	1 9/16	TTXR8TPE2
10IPR	TTXR10TPE	1 9/16	TTXR10TPE2
15IPR	TTXR15TPE	1 9/16	TTXR15TPE2
20IPR	TTXR20TPE	1 9/16	TTXR20TPE2
25IPR	TTXR25TPE	1 9/16	TTXR25TPE2

Set shown includes magnetic storage tray

211EFTXRTPY Tamper Resistant Combination *TORX Plus* Set

- Includes 1/4" drive TTXR8TPE–TTXR25TPE *TORX Plus* Drivers plus 3/8" drive FTXR27TPE–FTXR55TPE *TORX Plus* Drivers (11 pcs) (8IPR–55IPR). Applications for set include 2003 Ford® Mustang® transmissions, 2004 *Ford* F-150 transfer case, 2004 Porsche® Cayenne® turbo air sensor, Delphi® and Stanadyne® pumps, Cummins® B and C engine injection pumps and John Deere® diesel injector pumps

METRIC HEX BIT SOCKETS



210EFTAMY

Hex/Standard, mm

Set Contains: 106ETMAMY

mm		A	B	
2	TMAM2E	47.8	TMAM2E2A	•
2.5	TMAM2.5E	47.8	TMAM2.5E2	•
3	TMAM3E	47.8	TMAM3E2	•
4	TMAM4E	47.8	FAM4E2	•
5	TMAM5E	47.8	FAM5E2	•
6	TMAM6E	47.8	FAM6E2	•

Sets include magnetic storage tray

210EFTAMY Combination Metric Standard Hex Set

- Includes 1/4" drive TMAM2E–TMAM3E Standard Length Drivers plus 3/8" drive FAM4E–FAM10E Standard Length Drivers (10 pcs) (2 mm–10 mm)



TUAM6E

Hex/Universal Stubby, mm

mm		A
5	TUAM5E	38.1
6	TUAM6E	38.1



208EFTAMXSY

Hex/Stubby, mm

mm		A	B
3	TMAMXS3E	26.0	TMAMXS3E2
4	TMAMXS4E	27.0	TMAMXS4E2
5	TMAMXS5E	27.0	TMAMXS5E2
6	TMAMXS6E	29.0	TMAMXS6E2

Set includes magnetic storage tray

208EFTAMXSY Metric Combination Stubby Hex Set

- Includes 1/4" drive TMAMXS3E–TMAMXS6E Stubby Drivers plus 3/8" drive FAMXS7E–FAMXS10E Stubby Drivers (8 pcs) (3 mm–10 mm)

208EFTABMY

Ball Hex/Standard, mm

		A	B
3	TMABM3E	47.7	TMABM3E2
4	TMABM4E	47.6	TMABM4E2
5	TMABM5E	47.9	TMABM5E2
6	TMABM6E	47.9	TMABM6E2

Set includes magnetic storage tray

208EFTABMY Metric Ball Hex Combination Set

- Includes 1/4" drive TMABM3E–TMABM6E Standard Length Drivers plus 3/8" drive FABM7E–FABM10E Standard Length Drivers (8 pcs) (3 mm–10 mm)

⚠WARNING

- Do not use chrome or industrial finish hand tools with impact drivers
- Read safety precautions on pages W1 to W4

HEX BIT SOCKETS



GTMA8E

110ETMAY

Hex/Standard, inches

Set Contains: 110ETMAY

			A	B	Length with Opt. Long Bit	Optional Long Bit	
1/16	TMA2E	–	1 7/8	TMA2E2	6	TMAL2E2	•
5/64	TMA2.5E	GTMA2.5E	1 7/8	TMA2.5E2	6	TMAL2.5E2	•
3/32	TMA3E	GTMA3E	1 7/8	TMA3E2	6	TMAL3E2	•
7/64	TMA3.5E	–	1 7/8	TMA3.5E2	6	TMAL3.5E2	•
1/8	TMA4E	GTMA4E	1 7/8	TMA4E2	6	TMAL4E2	•
9/64	TMA4.5E	–	1 7/8	TMA4.5E2	6	TMAL4.5E2	•
5/32	TMA5E	GTMA5E	1 7/8	FA5E2	—	–	•
3/16	TMA6E	GTMA6E	1 15/16	FA6E2	—	–	•
7/32	TMA7E	GTMA7E	1 7/8	FA7E2	—	–	•
1/4	TMA8E	GTMA8E	1 7/8	FA8E2	—	–	•

NOTE: Optional long bits are not included in the listed sets. Sets shown include storage tray

212EFTAY Combination Drive Standard Hex Set
- Includes 1/4" drive TMA2E–TMA3.5E Hex Drivers plus 3/8" drive FA4E–FA12E Hex Drivers (12 pcs) (1/16"–3/8")

208EFTAXSY

208EFTABY

Hex/Stubby, inches

		A	B
3/32	TMAXS3E	1 1/32	TMAXS3E2
1/8	TMAXS4E	1 1/32	TMAXS4E2
9/64	TMAXS4.5E	1 1/16	TMASX4.5E2
5/32	TMAXS5E	1 1/16	TMAXS5E2
3/16	TMAXS6E	1 3/32	TMAXS6E2

Set shown includes magnetic storage tray

208EFTAXSY Combination Drive Stubby Hex Set
- Includes 1/4" drive TMAXS4E–TMAXS6E Stubby Drivers plus 3/8" drive FAXS7E–FAXS12E Stubby Drivers (8 pcs) (1/8"–3/8")

TMAXS3E Stubby Hex Socket Driver
- For fasteners on Rolls-Royce® commercial aircraft V2500 engines. A stubby bit socket allows for a positive fit, giving more direct torque when removing or installing these fasteners

Ball Hex/Standard, inches

		A	B
1/8	TMAB4E	1 7/8	TMAB4E2
9/64	TMAB4.5E	1 7/8	TMAB4.5E2
5/32	TMAB5E	1 7/8	TMAB5E2
3/16	TMAB6E	1 7/8	TMAB6E2
7/32	GTMAB7E	1 7/8	FAB7E2

Sets shown include magnetic storage tray

208EFTABY Combination Standard Ball Hex Set
- Includes 1/4" drive TMAB4E–TMAB6E Ball Hex Drivers plus 3/8" drive FAB7E–FAB12E Ball Hex Drivers (8 pcs) (1/8"–3/8")

SPECIAL APPLICATION BIT

PTMTS4SE



MORTORQ®/Super Bit

#	Stock No.	A	B
MTS-4	PTMTS4SE	1 11/16	PTMTS4E2

PTMTS4SE *MORTORQ* Stubby Bit Socket

Applications:
- Connects the fuel cell to the electric motors and other systems on Hyundai® Tucson® IX Fuel Cell Vehicles

FLAT TIP AND PHILLIPS® TIP BIT

TMC106E

TM82



— Flat Tip, inches

		Stock No.	A	B
Standard Length	3/16 x .032	TMC104E	2 7/8	TMC104E2A
	1/4 x .032	TMC105E	2 15/16	TMC105E2A
	3/8 x .042	TMC106E	2 7/8	TMC106E2A
Short	1/4 x .036	TM82	7/8	TM82-2C

FLAT TIP AND PHILLIPS® TIP BIT SOCKETS

Phillips/Standard

		Stock No.	Industrial Stock No.	A	B
Standard Length	#1	TMP12E	GTMP12E	1 7/8	TMP12E2
	#2	TMP22E	–	1 7/8	FP22E2
Short	#2	TMP21E	–	1 1/4	TMP21E2
	#2	TMP82	–	15/16	TMP82-2B
Long	#2	TMP23E	–	3 1/16	TMP23E2



TMP22E GTMP12E TMP82 TMP23E

CLUTCH BIT SOCKETS

Clutch, Standard Length

		A	B
3/16	TM27E	3/16	1 3/8
1/4	TM30E	1/4	1 3/8
5/32	TM31E	5/32	1 3/8



TM30E

IMPACT ACCESSORIES



103ITMX

Impact Extensions

- Features snap ring anvil for excellent socket to extension engagement
- Designed for use with most 1/4" cordless electric and air operated impact tools

Stock No.	Finish	A	B	Set Contains: 103ITMX
ITMX20	Industrial Finish	5/16	2	•
ITMX40	Industrial Finish	5/16	4	•
ITMX60	Industrial Finish	5/16	6	•

Set shown includes storage tray



IPM80A IPM800A

Swivel Ball Universal Joint (Impact)

Stock No.	Retention Type	A	B
IPM80A	Lock Button	5/8	1 3/8
IPM800A	Friction Ball	5/8	1 3/8

105TMIXL

Impact Locking



Impact Locking Extensions

- Quick release locking sleeve provides secure connection and easy socket removal
- Knurled release collar for easy one-hand operation, even with slippery hands
- Female drive end recessed to accommodate new style impact guns
- Positive pin lock retains socket securely
- Heavy duty shank for high torque applications

Stock No.	A	B	Set Contains: 105TMIXL
TMIXL32	11/32	2 7/8	•
TMIXL62	11/32	5 7/8	•
TMIXL122	11/32	11 7/8	•
TMIXL182	11/32	17 3/4	•
TMIXL242	11/32	23 3/4	•

Set includes storage tray

⚠WARNING

- Do not use chrome or industrial finish hand tools with impact drivers
- Read safety precautions on pages W1 to W4

FLANK DRIVE® IMPACT SOCKETS

112IMTMM

Shallow, mm

mm	6	A	B	C	D	E	6
5	IMTMM5	8.5	12.1	13.1	22.2	4.1	•
5.5	IMTMM5.5	9.3	12.1	13.1	22.2	4.1	•
6	IMTMM6	10.2	12.1	13.1	22.2	6.1	•
7	IMTMM7	11.5	12.1	13.1	22.2	6.1	•
8	IMTMM8	12.7	12.7	13.1	22.2	6.1	•
9	IMTMM9	14.0	14.0	13.1	22.2	6.1	•
10	IMTMM10	15.2	15.2	13.0	22.2	6.1	•
11	IMTMM11	16.4	16.4	12.8	22.2	6.4	•
12	IMTMM12	17.3	17.3	12.7	22.2	7.1	•
13	IMTMM13	18.7	18.7	12.5	22.2	7.4	•
14	IMTMM14	20.3	20.3	13.1	23.0	8.6	•
15	IMTMM15	21.1	21.1	13.9	23.8	8.9	•

Set Contains: 112IMTMM

Set includes magnetic storage tray

112SIMTMM



Deep, mm

mm	6	A	B	C	D	E	6
5	SIMTMM5	8.5	12.1	41.9	50.8	4.1	•
5.5	SIMTMM5.5	9.3	12.1	41.9	50.8	4.1	•
6	SIMTMM6	10.2	12.1	41.9	50.8	6.1	•
7	SIMTMM7	11.5	12.1	41.9	50.8	6.1	•
8	SIMTMM8	12.7	12.7	41.9	50.8	6.1	•
9	SIMTMM9	14.0	14.0	41.9	50.8	6.1	•
10	SIMTMM10	15.2	15.2	41.9	50.8	6.1	•
11	SIMTMM11	16.4	16.4	41.9	50.8	6.4	•
12	SIMTMM12	17.3	17.3	41.9	50.8	7.1	•
13	SIMTMM13	18.7	18.7	41.9	50.8	7.4	•
14	SIMTMM14	20.3	20.3	41.9	50.8	8.6	•
15	SIMTMM15	21.1	21.1	41.9	50.8	8.9	•

Set Contains: 112SIMTMM

Set includes magnetic storage tray

106IMTM

Shallow, inches

	6	A	B	C	D	E	6
1/4	IMTM8A	13/32	1/2	17/32	7/8	1/4	•
5/16	IMTM10A	1/2	1/2	17/32	7/8	1/4	•
3/8	IMTM12A	9/16	1/2	17/32	7/8	1/4	•
7/16	IMTM14A	21/32	1/2	17/32	7/8	1/4	•
1/2	IMTM16A	23/32	1/2	17/32	7/8	9/32	•
9/16	IMTM18A	13/16	1/2	9/16	29/32	11/32	•

Set Contains: 106IMTM

106SIMTM

Deep, inches

	6	A	B	C	D	E	6
1/4	SIMTM8	13/32	15/32	1 1/2	2	1/4	•
5/16	SIMTM10	1/2	1/2	1 1/2	2	1/4	•
3/8	SIMTM12	9/16	9/16	1 1/2	2	1/4	•
7/16	SIMTM14	21/32	21/32	1 1/2	2	1/4	•
1/2	SIMTM16	11/16	11/16	1 1/2	2	9/32	•
9/16	SIMTM18	13/16	13/16	1 1/2	2	11/32	•

Set Contains: 106SIMTM

ASME®/ANSI® B107.2

Set includes magnetic storage tray

FLANK DRIVE IMPACT SWIVEL SOCKETS

106IPTMM

Shallow Swivel, mm

mm	6	A	B	D	E	6
5	IPTMM5	8.6	15.4	35.4	4.1	
5.5	IPTMM5.5	9.5	15.4	35.8	4.1	
6	IPTMM6	10.7	15.4	36.2	4.1	
7	IPTMM7	11.5	15.4	37.4	4.3	
8	IPTMM8	12.7	15.4	38.6	4.8	•
9	IPTMM9	13.9	15.4	39.7	5.3	
10	IPTMM10	15.2	15.4	41.0	5.8	•
11	IPTMM11	16.4	15.4	42.5	6.4	
12	IPTMM12	17.3	17.9	44.9	6.9	•
13	IPTMM13	18.7	17.9	46.1	7.4	•
14	IPTMM14	20.4	17.9	47.6	7.8	•
15	IPTMM15	21.1	17.9	48.1	7.8	•

Set Contains: 106IPTMM

Set includes storage tray (not magnetic)

106IPTM



Shallow Swivel, inches

	6	A	B	C	D	6
1/4	IPTM8	27/64	39/64	1 27/64	5/32	•
5/16	IPTM10	1/2	39/64	1 1/2	3/16	•
3/8	IPTM12	35/64	39/64	1 13/16	7/32	•
7/16	IPTM14	41/64	39/64	1 13/16	1/4	•
1/2	IPTM16	45/64	46/64	1 13/16	19/64	•
9/16	IPTM18	51/64	45/64	1 7/8	5/16	•

Set Contains: 106IPTM

Set includes storage tray (not magnetic)

Shallow 10 pt., mm

- 2009–Current Honda® Odyssey® and Pilot vehicles front seat tracks
- Two fasteners on each track. One each 8 mm and 10 mm
- Forged from tough alloy steel
- Heat treated to a lower hardness to add impact resistance and ductility

DPTM8 Shallow Impact Socket, 8 mm, 10 pt.
DPTM10 Shallow Impact Socket, 10 mm, 10 pt.



DPTM10

Locking Power Adaptors

- Use with electric/cordless drills and screwdrivers that accept 1/4" shanks
- Manufactured from the highest quality proprietary steel, providing optimum strength and durability
- Knurled sleeve provides easy attachment and removal of sockets even with the greasiest hands
- One-handed lock mechanism with ball retention ensures socket retention and allows for faster socket attachment and removal
- Black oxide finish helps protect against corrosion for longer tool life

103TMLPA

Stock No.	A	B	Set Contains: 103TMLPA
TMLPA2	1/4	2	•
TMLPA4	1/4	4	•
TMLPA6	1/4	6	•

Set includes storage tray



Hex-To-Square Adaptors (Power)

- 1/4" hex size; 1" length of hex

Stock No.	A	B
GM3042A	Lock Button	2
GM3043	Lock Button	4
GM3046	Lock Button	6
GM3048	Lock Button	8

GM3042A



TORX®/Power Drivers

#	Stock No.	A	B
T20	PTTX20E	1 9/16	TTX20E2
T25	PTTX25E	1 9/16	TTX25E2



PTTX20E

Shallow Magnetic, mm

- Magnetic sockets are perfect for installing and removing a fastener as the magnetic feature will hold the fastener in the socket, saving time and frustration
- Square drive side hole works with ball or pin type retention
- *Flank Drive* wrenching system grips the fastener on the socket flanks (flats) to deliver up to 15%–20% more turning power



110MGMM

mm	6	A	B	D	E	Set Contains: 110MGMM 6
5	MGMM5	8.4	12.1	22.8	4.6	•
5.5	MGMM5.5	9.3	12.1	22.8	5.1	•
6	MGMM6	10.2	12.1	22.8	6.1	•
7	MGMM7	11.5	12.1	22.8	6.1	•
8	MGMM8	12.7	12.7	23.8	6.1	•
10	MGMM10	15.2	15.2	23.8	6.1	•
12	MGMM12	17.3	17.3	23.8	6.4	•
13	MGMM13	18.9	18.9	23.8	7.9	•
14	MGMM14	20.5	20.5	23.8	8.6	•
15	MGMM15	21.3	21.3	23.8	8.6	•

⚠WARNING

- Do not use industrial finish power tools with impact drivers
- Read safety precautions on pages W1 to W4

FLANK DRIVE® MAGNETIC POWER SOCKETS



MGM8D

MGMMS11B

MGMS10A

Shallow Magnetic, inches

	6	A	B	D	E
1/4	MGM8D	7/16	1/2	7/8	3/32
5/16	MGM10C	1/2	1/2	15/16	3/32
3/8	MGM12C	9/16	19/32	15/16	1/8
7/16	MGM14C	11/16	11/16	15/16	1/8

Deep Magnetic, mm

mm	6	A	B	D	E
7	MGMMS7A	10.7	12.4	50.8	5.8
8	MGMMS8A	11.8	12.4	50.8	5.8
10	MGMMS10A	14.1	14.1	50.8	6.4
11	MGMMS11B	15.6	15.6	50.8	6.4
12	MGMMS12B	17.3	17.3	50.8	7.1
13	MGMMS13A	18.1	18.1	50.8	7.6

Deep Magnetic, inches

	6	A	B	D	E
1/4	MGMS8A	3/8	7/16	2	3/32
5/16	MGMS10A	3/8	15/32	2	5/16

1/8" DRIVE GENERAL SERVICE SET

1605TA

1605TA General Service Set 5 Tools, Includes:

	6-Point Sockets
3/32"	T6
1/8"	T8
5/32"	T10
3/16"	T12
1/8" Drive Handle	T40A

GENERAL SERVICE SETS

107ATMPB

107ATMPB Expandable General Service Set and Additions
Start with the 107ATMPB General Service Set and add any of the suggested socket sets below to custom build exactly the 1/4" drive set you need. The storage case has a large enough cavity to accommodate two rows of sockets — standard, semi deep, deep, universal or any combination of these in fractional or metric sizes.

Seven Tools, includes:

T72	High Strength Sealed Ratchet
TMU8B	Universal Joint
TMXK2	2" Knurled Extension
TMXK4	4" Knurled Extension
TMXK60	6" Knurled Extension
TM10G	Breaker Bar
SGT4BR	1/4" Dr. Standard Shank Driver

Set (Add-on)

Suggested additions not included in set:	110TMY	6-Point Shallow Socket Set (10pc)
	110STMY	6-Point Deep Socket Set (10pc)
	111TMMDY	12-Point Metric Shallow Socket Set (11pc)
	111STMMDY	12-Point Metric Deep Socket Set (11pc)
	106ETMAMY	Metric Hex Driver Set (6pc)

131TMPB

117TMM

131TMPB 6-Point Metric Set

31 Tools, Includes:

mm	6-Point Shallow Sockets	6-Point Deep Sockets
5	TMM5	STMM5
5.5	TMM5.5	STMM5.5
6	TMM6	STMM6
7	TMM7	STMM7
8	TMM8	STMM8
9	TMM9	STMM9
10	TMM10	STMM10
11	TMM11	STMM11
12	TMM12	STMM12
13	TMM13	STMM13
14	TMM14	STMM14
15	TMM15	STMM15

Also Includes:		
	TMXK60	6" Knurled Extension
	SSDMR4B	Magnetic Ratcheting Screwdriver
	TMXK2	2" Knurled Extension
	T72	High Strength Sealed Ratchet
	TM10G	Breaker Bar
	TMU8B	Universal Joint
	GMB3041	Hex-To-Square Adaptor

117TMM Metric 6-Point Starter Set

17 Tools, Includes:

mm	6-Point Shallow Sockets
4	TMM4
5	TMM5
5.5	TMM5.5
6	TMM6
7	TMM7
8	TMM8
9	TMM9
10	TMM10
11	TMM11
12	TMM12
13	TMM13
14	TMM14
15	TMM15

Also Includes:		
	T72	High Strength Sealed Ratchet
	TMU8B	Universal Joint
	TMXK2	2" Knurled Extension
	TMXK4	4" Knurled Extension

144TMPB

144TMPB 6-Point Metric/Fractional Set

44 Tools, Includes:

Also Includes:		
	T72	High Strength Sealed Ratchet
	TMU8B	Universal Joint
	TMXK2	2" Knurled Extension
	TMXK60	6" Knurled Extension
	PB99A	Storage Box

mm	6-Point Shallow Sockets		6-Point Shallow Sockets	mm	6-Point Deep Sockets		6-Point Deep Sockets
5.5	TMM5.5	3/16	TM6*	5.5	STMM5.5	3/16	STM6
6	TMM6	7/32	TM7*	6	STMM6	7/32	STM7
7	TMM7	1/4	TM8	7	STMM7	1/4	STM8
8	TMM8	9/32	TM9	8	STMM8	9/32	STM9
9	TMM9	5/16	TM10	9	STMM9	5/16	STM10
10	TMM10	11/32	TM11	10	STMM10	11/32	STM11
11	TMM11	3/8	TM12	11	STMM11	3/8	STM12
12	TMM12	7/16	TM14	12	STMM12	7/16	STM14
13	TMM13	1/2	TM16	13	STMM13	1/2	STM16
14	TMM14	9/16	TM18	14	STMM14	9/16	STM18

*Conventional hex

⚠WARNING

- Do not use "cheater bars" on handles
- Do not use chrome or industrial finish hand tools with impact drivers
- Read safety precautions on pages W1 to W4

GENERAL SERVICE SETS

114ATMP

114ATMP 6-Point Fractional Set

14 Tools, Includes:

	6-Point Shallow Sockets
3/16	TM6
7/32	TM7
1/4	TM8
9/32	TM9
5/16	TM10
11/32	TM11
3/8	TM12
7/16	TM14
1/2	TM16
9/16	TM18

Also Includes:		
	T72	High Strength Sealed Ratchet
	TMU8B	Universal Joint
	TMXK2	2" Knurled Extension
	TMXK4	4" Knurled Extension

120DTMPB

120DTMPB 6-Point Fractional General Service

20 Tools, Includes:

	6-Point Shallow Sockets
3/16	TM6
7/32	TM7
1/4	TM8
9/32	TM9
5/16	TM10
11/32	TM11
3/8	TM12
7/16	TM14
1/2	TM16
9/16	TM18

Also Includes:		
	TM4CSA	Handle
	TM10G	Breaker Bar
	TM408	1/4" Double Square Socket
	TM410	5/16" Double Square Socket
	TM412	3/8" Double Square Socket
	T72	High Strength Sealed Ratchet
	TMU8B	Universal Joint
	TMXK2	2" Knurled Extension
	TMXK4	4" Knurled Extension
	TMXK60	6" Knurled Extension

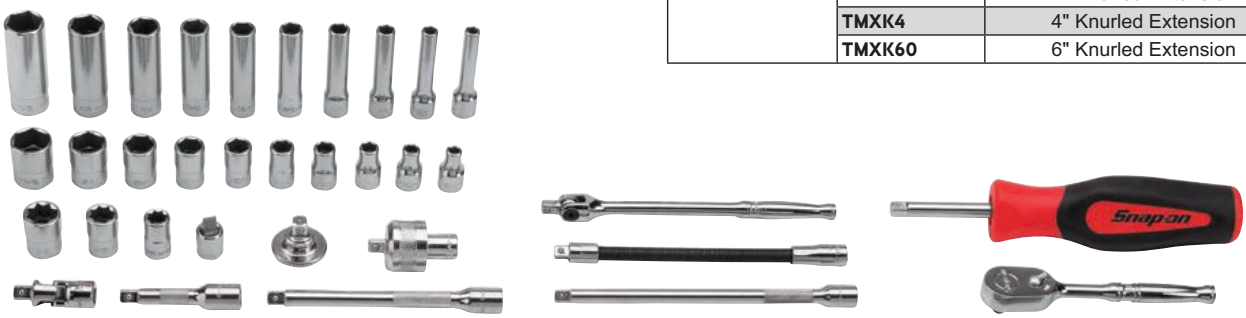

134ATMP

134ATMP 6-Point Fractional Set

34 Tools, Includes:

	6-Point Shallow Sockets		6-Point Deep Sockets
3/16	TM6	3/16	STM6
7/32	TM7	7/32	STM7
1/4	TM8	1/4	STM8
9/32	TM9	9/32	STM9
5/16	TM10	5/16	STM10
11/32	TM11	11/32	STM11
3/8	TM12	3/8	STM12
7/16	TM14	7/16	STM14
1/2	TM16	1/2	STM16
9/16	TM18	9/16	STM18

Also Includes:		
	T72	High Strength Sealed Ratchet
	TMU8B	Universal Joint
	TMXK2	2" Knurled Extension
	TMXK4	4" Knurled Extension
	TMXK60	6" Knurled Extension
	SGT4BR	1/4" Dr. Standard Shank Driver
	TM10G	Breaker Bar
	TM61A	1/4" Dr. Flexible Extension, 6" long
	TM67A	Ratchet Adaptor
	TM82	1/4" x .036" Flat Tip Driver
	TM408	1/4" Double Square Socket
	TM410	5/16" Double Square Socket
	TM412	3/8" Double Square Socket
	TMS70A	Ratchet Spinner

BPRTR936

BPRTR936SG



Quick Release Ratchets

Stock No.	Description	Gear Teeth	Swing Arc	A	B	C	Repair Kit
BPRTR936	Standard Handle	36	10°	15/32	31/32	5 5/8	**RKRBPRTR936**
BPRTR936SG	Soft Grip Handle	36	10°	15/32	31/32	5 5/8	**RKRBPRTR936**

ASME®/ANSI® B107.10

BPR703 Quick Release Ratchet Set
1/4" drive BPRTR936, 3/8" drive BPRFR938 and 1/2" drive BPRSR940 Ratchets (3 pcs) in storage tray.

BPR703SG Quick Release Ratchet Set
1/4" drive BPRTR936SG, 3/8" drive BPRFR938SG and 1/2" drive BPRSR940SG Soft Grip Ratchets (3 pcs) in storage tray.

FSDR

BLPSD14

FSD14

FSD38



Ratchet Spinners

Stock No.	Square Drive, inches	Description	A	B
FSDR	1/4 Male to 1/4 Female	Finger Ratchet	1 1/8	1 7/16
BLPSD14	3/8 Male to 1/4 Female	Ratchet Spinner	7/8	27/32
FSD14	3/8 Male to 1/4 Female	Spinner Adaptor	1	1 1/2
FSD38	1/4 Male to 3/8 Female	Spinner Adaptor	1	1 1/2

ASME/ANSI B107.10

FSD3KT Spinner Adaptor Set
Includes FSD14 (3/8 male to 1/4 female), FSD38 (1/4 male to 3/8 female) and FSD1 (3/8 male to 3/8 male).

FSDR Finger Ratchet
Reversible, finger ratchet. Small size works great for extremely tight areas. Aluminum knurled outer ring for sure grip. 1/4" drive on one side and 1/4" hex drive on other side.



BLPBB146

Breaker Bar

Stock No.	Description	A	B	C
BLPBB146	Standard Handle	5/8	6	3/8

⚠WARNING

- Do not use chrome or industrial finish hand tools with impact drivers
- Do not use "cheater bars" on handles
- Read safety precautions on pages W1 to W4

RATCHETS, HANDLES AND ACCESSORIES Blue-Point®

BLPCGHD146

Handled Driver

Stock No.	Description	Length
BLPCGHD146	Spinner Handle	6

TURBOT103

Turbo T-handle Speed Drivers

TURBOT103 Turbo T-handle Set

- T9TURBO (1/4" drive), TH10TURBO (1/4" hex) and F11TURBO (3/8" drive)
- 3 pcs in storage tray

Stock No.	Description	Handle Type
T9TURBO	1/4" Square Drive	Turbo T-Handle
TH10TURBO	1/4" Hex	Turbo T-Handle

BLPTXK3

Knurled

Stock No.	B
BLPTXK1.5	1 9/16
BLPTXK2	2 3/32
BLPTXK3	2 15/16
BLPTXK4	4
BLPTXK6	6

103TMXLBP



Locking

Stock No.	B	Set Contains: 103TMXLBP
TMXLBP4	4	•
TMXLBP6	6	•
TMXLBP10	10	•

Set shown includes storage tray

YA515A



Locking (Set Screw)

YA515A Set Screw Locking Extension

- Allows easy and secure tool stacking
- Securely connects breaker bar, extensions and ratchets to socket and socket drivers for overhead work
- Sliding sleeve for easy removal

Stock No.	Finish	A	B
YA515A	Chrome	1/2	1 11/16

BLPEXTF146



Flexible Extension

Stock No.	A	B	C
BLPEXTF146	5/16	3 5/8	6

BLPUJ14



Universal Joint

Stock No.	A	B
BLPUJ14	5/8	1 1/2

BLPAFM3814

BLPAFM1438



Adaptors

Stock No.	Description	A	B
BLPAFM3814	Square Drive Adaptor	3/8	1/4
BLPAFM1438	Square Drive Adaptor	1/4	3/8

BLPSM145

BLPSM149

BLPSM1412

BLPS1414

BLPS14716

Shallow, mm

mm	6	Length, mm
4	BLPSM144	24.8
4.5	BLPSM144.5	24.8
5	BLPSM145	24.8
5.5	BLPSM145.5	24.8
6	BLPSM146	24.8
7	BLPSM147	24.8
8	BLPSM148	24.8
9	BLPSM149	24.8
10	BLPSM1410	24.8
11	BLPSM1411	24.8
12	BLPSM1412	24.8
13	BLPSM1413	24.8
14	BLPSM1414	24.8

Shallow, inches

"	6	Length, inches
3/16	BLPS14316	1
7/32	BLPS14732	1
1/4	BLPS1414	1
9/32	BLPS14932	1
5/16	BLPS14516	1
11/32	BLPS141132	1
3/8	BLPS1438	1
7/16	BLPS14716	1
1/2	BLPS1412	1
9/16	BLPS14916	1
5/8	BLPS1458	1

BLPLSM145

BLPLSM1412

BLPLS1414

BLPLS1412

Deep, mm

mm	6	Length, mm
4	BLPLSM144	50
5	BLPLSM145	50
6	BLPLSM146	50
7	BLPLSM147	50
8	BLPLSM148	50
9	BLPLSM149	50
10	BLPLSM1410	50
11	BLPLSM1411	50
12	BLPLSM1412	50
13	BLPLSM1413	50
14	BLPLSM1414	50

Deep, inches

"	6	Length, inches
3/16	BLPLS14316	1 31/32
7/32	BLPLS14732	1 31/32
1/4	BLPLS1414	1 31/32
9/32	BLPLS14932	1 31/32
5/16	BLPLS14516	1 31/32
11/32	BLPLS141132	1 31/32
3/8	BLPLS1438	1 31/32
7/16	BLPLS14716	1 31/32
1/2	BLPLS1412	1 31/32
9/16	BLPLS14916	1 31/32
5/8	BLPLS1458	1 31/32

WARNING

- Do not use chrome or industrial finish hand tools with impact drivers
- Read safety precautions on pages W1 to W4

SOCKETS Blue-Point®

BLPS81438

Double Square

	8	Length, inches
1/4	BLPS81414	1
5/16	BLPS814516	1
3/8	BLPS81438	1

TSTY70

122TSTY

Twist Impact, inches (mm)

#	Stock No.	Length, inches (mm)	122TSTY Set Contains:
4.50 mm	TSTY45	1 (25.4)	•
4.75 mm and 3/16"	TSTY47	1 (25.4)	•
5.00 mm	TSTY50	1 (25.4)	•
5.25 mm	TSTY52	1 (25.4)	•
5.50 mm	TSTY55	1 (25.4)	•
5.75 mm	TSTY57	1 (25.4)	•
6.00 mm	TSTY60	1 (25.4)	•
6.25 mm and 1/4"	TSTY62	1 (25.4)	•
6.50 mm	TSTY65	1 (25.4)	•
6.75 mm	TSTY67	1 (25.4)	•
7.00 mm	TSTY70	1 (25.4)	•
7.25 mm and 9/32"	TSTY72	1 (25.4)	•
7.50 mm	TSTY75	1 (25.4)	•
7.75 mm	TSTY77	1 (25.4)	•
8.00 mm and 5/16"	TSTY80	1 (25.4)	•
8.25 mm	TSTY82	1 (25.4)	•
8.50 mm	TSTY85	1 (25.4)	•
8.75 mm and 11/32"	TSTY87	1 (25.4)	•
9.00 mm	TSTY90	1 (25.4)	•
9.25 mm	TSTY92	1 (25.4)	•
9.50 mm and 3/8"	TSTY95	1 (25.4)	•
10.00 mm	TSTY100	1 (25.4)	•

122TSTY Twist Impact Socket Set

- Remove rounded or damaged fasteners with almost any head configuration (hex, round, square and more)
- Use on nuts and bolts from 2.3 mm to 6 mm and #2 to #10 sizes and studs from 4.5 mm to 10.00 mm (3/16" to 3/8")
- Other applications include oil pan drain plugs, corroded marine nuts and bolts, exhaust manifold nuts, and pipe nipples

TORX® SOCKETS *Blue-Point*

BLPTE145

External *TORX*

#	Stock No.	Length, inches
E4	BLPTE144	1
E5	BLPTE145	1
E6	BLPTE146	1
E7	BLPTE147	1
E8	BLPTE148	1

BLPT1415

TORX/Standard

#	Stock No.	A
T6	BLPT146	1 7/16
T7	BLPT147	1 7/16
T8	BLPT148	1 7/16
T9	BLPT149	1 7/16
T10	BLPT1410	1 7/16
T15	BLPT1415	1 7/16
T20	BLPT1420	1 7/16
T25	BLPT1425	1 7/16
T27	BLPT1427	1 7/16
T30	BLPT1430	1 7/16

BLPTL1410

TORX/Long

#	Stock No.	A
T6	BLPTL146	3 15/16
T7	BLPTL147	3 15/16
T8	BLPTL148	3 15/16
T9	BLPTL149	3 15/16
T10	BLPTL1410	3 15/16
T15	BLPTL1415	3 15/16
T20	BLPTL1420	3 15/16
T25	BLPTL1425	3 15/16
T27	BLPTL1427	3 15/16
T30	BLPTL1430	3 15/16

BLPTORX1410

BLPTS1425TP

TORX/Stubby

#	Stock No.	A	Set Contains: BLPTORX1410
T10	BLPTS1410	3/4	•
T15	BLPTS1415	3/4	•
T20	BLPTS1420	3/4	•
T25	BLPTS1425	3/4	•
T27	BLPTS1427	3/4	•
T30	BLPTS1430	3/4	•
T40	BLPTS1440	3/4	•
T45	BLPTS1445	3/4	•
T47	BLPTS1447	3/4	•
T50	BLPTS1450	3/4	•

Set shown includes storage tray

TORX/Tamper Resistant, Stubby

#	Stock No.	A
TP8	BLPTS148TP	3/4
TP10	BLPTS1410TP	3/4
TP15	BLPTS1415TP	3/4
TP20	BLPTS1420TP	3/4
TP25	BLPTS1425TP	3/4
TP27	BLPTS1427TP	3/4
TP30	BLPTS1430TP	3/4
TP40	BLPTS1440TP	3/4
TP45	BLPTS1445TP	3/4
TP50	BLPTS1450TP	3/4

BLPT1420TP

TORX/Tamper Resistant, Standard

#	Stock No.	A
T6	BLPT146TP	1 7/16
T7	BLPT147TP	1 7/16
T8	BLPT148TP	1 7/16
T9	BLPT149TP	1 7/16
T10	BLPT1410TP	1 7/16
T15	BLPT1415TP	1 7/16
T20	BLPT1420TP	1 7/16
T25	BLPT1425TP	1 7/16
T27	BLPT1427TP	1 7/16
T30	BLPT1430TP	1 7/16

BLPTL1425TP

TORX/Tamper Resistant, Long

#	Stock No.	A
T6	BLPTL146TP	3 15/16
T7	BLPTL147TP	3 15/16
T8	BLPTL148TP	3 15/16
T9	BLPTL149TP	3 15/16
T10	BLPTL1410TP	3 15/16
T15	BLPTL1415TP	3 15/16
T20	BLPTL1420TP	3 15/16
T25	BLPTL1425TP	3 15/16
T27	BLPTL1427TP	3 15/16
T30	BLPTL1430TP	3 15/16

WARNING • Read safety precautions on pages W1 to W4

METRIC HEX BIT SOCKETS Blue-Point®



BLPHEXS1418

Hex/Stubby, mm

mm		A
2	**BLPHSM142**	19.05
2.5	**BLPHSM1425**	19.05
3	**BLPHSM143**	19.05
4	**BLPHSM144**	19.05
5	**BLPHSM145**	19.05
6	**BLPHSM146**	19.05
7	**BLPHSM147**	19.05
8	**BLPHSM148**	19.05
9	**BLPHSM149**	19.05
10	**BLPHSM1410**	19.05

BLPHEXS1418 Hex Driver Set
Includes all BLPHSM metric bit sockets listed above plus all BLPHS fractional bit sockets.

BLPH124

BLPHL145

Hex, mm

mm		Length, mm
2.5	**BLPH1425**	34.9
3	**BLPH123**	60.3
4	**BLPH124**	60.3
5	**BLPH125**	60.3
6	**BLPH126**	60.3

Hex/Long, mm

mm		Length, mm
4	**BLPHL144**	100
5	**BLPHL145**	100
6	**BLPHL146**	100

HEX BIT SOCKETS *Blue-Point*

BLPH1414



BLPHL14532

Hex Standard, inches

		A
1/8	**BLPH1418**	1 7/16
9/64	**BLPH14964**	1 7/16
5/32	**BLPH14532**	1 7/16
3/16	**BLPH14316**	1 7/16
7/32	**BLPH14732**	1 7/16
1/4	**BLPH1414**	1 7/16
5/16	**BLPH14516**	1 7/16

Hex/Long, inches

		Length, inches
1/8	**BLPHL1418**	3 15/16
5/32	**BLPHL14532**	3 15/16
3/16	**BLPHL14316**	3 15/16

Hex/Stubby, inches

		A
5/64	BLPHS14564	3/4
3/32	BLPHS14332	3/4
7/64	BLPHS14764	3/4
1/8	BLPHS1418	3/4
5/32	BLPHS14532	3/4
3/16	BLPHS14316	3/4
7/32	BLPHS14732	3/4
1/4	BLPHS1414	3/4
5/16	BLPHS14516	3/4
3/8	BLPHS1438	3/4

BLPHEXS1418

BLPHEXS1418 Hex Driver Set
Includes all BLPHS bit sockets listed above plus all BLPHSM metric bit sockets in storage tray.

TRIPLE SQUARE BIT SOCKETS *Blue-Point*

Triple Square/Stubby, mm

mm	Stock No.	A
4	BLPXZN144	27
5	BLPXZN145	27
6	BLPXZN146	27
8	BLPXZN148	27
10	BLPXZN1410	27
12	BLPXZN1412	27



BLPXZN146

FLAT TIP BIT SOCKETS *Blue-Point*

Flat Tip, inches

		Stock No.	A
Standard Length	5/32	BLPFT14532	1 7/16
	7/32	BLPFT14732	1 7/16
	9/32	BLPFT14932	1 7/16
Short	1/4	BLPFS1414	3/4
	3/8	BLPFS1438	3/4



BLPFT14732

BLPFS1414

PHILLIPS® TIP BIT SOCKETS *Blue-Point*

Phillips

		Stock No.	A
Standard Length	#0	BLPP140	1 7/16
	#1	BLPP141	1 7/16
	#2	BLPP142	1 7/16
Stubby	#1	BLPPS141	3/4
	#2	BLPPS142	3/4



BLPPS142

BLPP142

⚠WARNING

- Do not use chrome or industrial finish hand tools with impact drivers
- Read safety precautions on pages W1 to W4

COMBINATION BIT SOCKET SETS Blue-Point®

BLPBSS40

BLPBSS40 1/4" Drive Stubby Bit Socket Set (40pc)

Set Components

- Ten Metric Bit Sockets (2 mm–10 mm)
- Ten Fractional Bit Sockets (5/64"–3/8")
- Ten TORX® Tamper Resistant Bit Sockets (TP8–TP50)
- Six XZN Triple Square Bit Sockets (XZN4–XZN12)
- Two Phillips® Bit Sockets (#1, #2)
- Two Flat Tip Bit Sockets (1/4", 3/8")

BLPHSSC30

Combination Socket Driver Set (30pc)

BLPHSSC30 Hex Bit Socket Set

Set Components

(1/4" drive):

- Five metric hex bit sockets (2.5 mm–6 mm)
- Six hex bit sockets (1/8"–1/4")

(3/8" drive):

- Five metric hex bit sockets (6 mm–10 mm)
- Five hex bit sockets (7/32"–7/16")

(1/2" drive):

- Five metric hex bit sockets (10 mm–19 mm)
- Four hex bit sockets (1/2"–3/4")

BLPTSSC43

Combination *TORX*/Socket and Bit Socket Set (43pc)

BLPTSSC43 *TORX* Sockets/*TORX* Bit Sockets Set

Set Components

(1/4" drive):

- Five external *TORX* sockets (E4–E8)
- Ten tamper resistant *TORX* socket drivers (T6–T30)
- Ten tamper resistant long *TORX* socket drivers (T6–T30)

(3/8" drive):

- Four external *TORX* sockets (E10–E16)
- Three tamper resistant *TORX* socket drivers (T40, T45, T50)
- Three tamper resistant long *TORX* socket drivers (T40, T45, T50)

(1/2" drive):

- Four external *TORX* sockets (E18–E24)
- Two tamper resistant *TORX* socket drivers (T55, T60)
- Two tamper resistant long *TORX* socket drivers (T55, T60)

BLPTHC87 TORX® Sockets/*TORX* and Hex Bit Sockets Set

Set Components
(1/4" drive):
- Five external *TORX* sockets (E4–E8)
- Ten *TORX* bit sockets (T6–T30)
- Ten long *TORX* bit sockets (T6–T30)
- Five metric hex bit sockets (2.5 mm–6 mm)
- Three long metric hex bit sockets (4 mm–6 mm)
- Six hex bit sockets (1/8"–1/4")
- Three long hex bit sockets (1/8"–3/16")

(3/8" drive):
- Four external *TORX* sockets (E10–E16)
- Three *TORX* bit sockets (T40–T50)
- Three long *TORX* bit sockets (T40–T50)
- Five metric hex bit sockets (6 mm–10 mm)
- Four long metric hex bit sockets (7 mm–10 mm)
- Four hex bit sockets (7/32"–3/8")
- Four long hex bit sockets (7/32"–3/8")

(1/2" drive):
- Four sxternal *TORX* sockets (E18–E24)
- Two *TORX* bit sockets (T55, T60)
- Two long *TORX* bit sockets (T55, T60)
- Two metric hex bit sockets (10 mm–19 mm)
- Five hex bit sockets (7/16"–3/4")

BLPTHC87

GENERAL SERVICE SETS *Blue-Point*

BLPGSS1427 General Service Set

Components (all 1/4" drive):
- 11 fractional (3/16"–5/8") six-point shallow sockets
- 11 fractional (3/16"–9/16") six-point deep sockets
- Three ratchet/socket accessories
- One quick release ratchet
- One spinner handle
- BLPGSS1427PB storage case

BLPGSS1427

BLPGSSM1427 General Service Set

Components (all 1/4" drive):
- 11 metric (4 mm–14 mm) six-point shallow sockets
- 11 metric (4 mm–14 mm) six-point deep sockets
- Three ratchet/socket accessories
- One quick release ratchet
- One spinner handle
- BLPGSSM1427PB storage case

BLPGSS1438 General Service Set

Components (all 1/4" drive):
- 11 fractional (3/16"–5/8") and 11 metric (4 mm–14 mm) six-point shallow sockets
- Four fractional hex bits (9/64", 3/16", 7/32", 1/4")
- Three flat tip bits (5/32", 3/16", 1/4")
- Two Phillips® tip bits (#1, #2)
- Five ratchet/socket accessories
- One quick release ratchet
- One spinner handle
- BLPGSS1438PB storage case

BLPGSSM1427

BLPGSS1438

⚠WARNING

- Do not use "cheater bars" on handles
- Do not use chrome or industrial finish hand tools with impact drivers
- Read safety precautions on pages W1 to W4

GENERAL SERVICE SETS Blue-Point®

BLPGSS1451A

BLPGSS1451A General Service Set

Components (all 1/4" drive):
- Ten fractional (3/16"–9/16") and 13 metric (4 mm–14 mm) standard sockets
- Three fractional (1/4", 5/16", 3/8") eight-point sockets
- Six TORX® socket drivers (T8–T27)
- Six fractional hex socket drivers (1/8"–5/16")
- Three flat tip socket drivers (5/32", 7/32", 9/32")
- Three Phillips® socket drivers (#0, #1, #2)
- Six ratchet/socket accessories
- One ratchet
- BLPGSS1451AC storage case

BLPGSS1462

BLPGSS1462 General Service Set

Components (all 1/4" drive):
- 11 fractional (3/16"–5/8") and 11 metric (4 mm–14 mm) standard sockets
- 11 fractional (3/16"–5/8") and 11 metric (4 mm–14 mm) deep sockets
- One bit holder
- Four hex bits (9/64", 3/16", 7/32", 1/4")
- Three flat tip bits (5/32", 3/16", 1/4")
- Two *Phillips* bits (#1, #2)
- Seven ratchet/socket accessories
- One ratchet
- BLPGSS1462PB storage case

BLPGSSC100

BLPGSSC100 General Service Set

Components (1/4" drive):
- Ten fractional (3/16"–9/16") and 13 metric (4 mm–14 mm) standard sockets
- Six ratchet/socket accessories
- One ratchet

Components (3/8" drive):
- 13 fractional (1/4"–1") and 19 metric (6 mm–24 mm)
- 11 external *TORX* sockets (E4–E20)
- Two spark plug sockets (5/8", 13/16")
- Five ratchet/socket accessories
- One ratchet

Components (Combination Wrenches):
- Nine fractional combination wrenches (1/4"–3/4")
- Ten metric combination wrenches (10 mm–19 mm)
- BLPGSSC100PB storage case

BLPGSSC155

BLPGSSC155 General Service Set

Components (1/4" drive):
- Ten fractional (3/16"–9/16") and 13 metric (4 mm–14 mm) standard sockets
- Ten fractional (3/16"–9/16") and 11 metric (4 mm–14 mm) deep sockets
- 20 assorted 1/4" hex bits with bit holder
- Six ratchet/socket accessories
- One quick release ratchet components (3/8" Drive)
- 13 fractional (1/4"–1") and 19 metric (6 mm–24 mm) standard sockets
- 11 fractional (3/8"–1") and 15 metric (10 mm–24 mm) deep sockets
- 11 external *TORX* sockets (E4–E20)
- Two spark plug sockets (5/8", 13/16")
- Three metric hex socket drivers (7 mm, 8 mm, 10 mm)
- Four tamper resistant *TORX* socket drivers (T40, T45, T50, T55)
- Five ratchet/socket accessories
- One quick release ratchet
- BLPGSSC155PB storage case

PERFORMANCE-DRIVEN DRIVE TOOLS.

When it comes to outstanding performance, our 3/8" drive tools deserve to take a bow. Day after day, year after year, and generation after generation, these tools are the right fit for almost any application. They're versatile, durable and dependable. When you need a tool with an impressive skill set, our Snap-on® 3/8" drive tools deliver.

MATERIALS SECOND TO NONE.

To make the best tools, you need the best materials. That's why each *Snap-on* ratchet is built with our proprietary alloy steel – and precision-crafted gears, springs and pawls.

Dual 80® Technology — Dual pawls and an 80-tooth gear provide more power in less lateral space. In combination with the compact head, the smaller ratcheting arc makes for smooth movement and the transfer of more torque.

Full range — Because you perform a wide range of tasks, we provide a wide range of tools. With Snap-on, you'll select from a broad range of ratchets, sockets and extensions that meet every application. We'll always have the right tool for your job.

RATCHETS

DUAL 80 TECHNOLOGY

F80

FL80

FLL80

FF80

GF80

FLF80

FBF80

FX80

FKF80

FK80

Dual 80® Technology Ratchets

Stop, Turn and Listen. A smoother, stronger ratchet. Try them to believe them.

***Dual 80* Technology Ratchets Feature:**

- 80-tooth gear
- Seven teeth in contact with gear to provide strength and durability
- Up to 25% less ratcheting arc to engage the next gear tooth
- Sealed head keeps dirt and other contaminants out of the head mechanism



Stock No.	Description	Gear Teeth	Swing Arc	A	B	C	Repair Kit
F80	Standard Handle	80	4.5°	9/16	1 1/4	7 7/16	RKRF80
FL80	Long Handle	80	4.5°	9/16	1 1/4	10 5/16	RKRF80
FLL80	Extra Long Handle	80	4.5°	3/4	1 5/8	17 1/2	RKRF80
FF80*	Standard Handle Flex Head	80	4.5°	9/16	1 1/4	8 7/16	RKRF80
GF80	Standard Handle, Black Industrial	80	4.5°	9/16	1 1/4	7 7/16	RKRF80
FLF80*	Long Flex Head	80	4.5°	9/16	1 1/4	11 1/2	RKRF80
FBF80*	Bent Handle Flex Head	80	4.5°	9/16	1 1/4	11 1/4	RKRF80
FX80**	Locking Flex Head	80	4.5°	9/16	1 1/4	11 1/2	RKRF80
FKF80*	Stubby Flex Head	80	4.5°	9/16	1 1/4	4 3/4	RKRF80
FK80***	Stubby Handle	80	4.5°	9/16	1 1/4	4 3/16	RKRF80

ASME®/ANSI® B107.10
*Uses RKRF841JT Flex Joint Repair Kit.
**Uses RKRF841JT Flex Joint Repair Kit and RKRFX936ALM Locking Mechanism Repair Kit.
****ASME/ANSI* B107.10 with exception of the length.

DUAL 80 TECHNOLOGY

FH80

FHL80

FHF80

FHLF80

FHBF80

FHOF80

FHX80



Dual 80® Technology Ratchets with Soft Grip Handle

Stock No.	Description	Gear Teeth	Swing Arc	A	B	C	Repair Kit
FH80	Standard Handle	80	4.5°	9/16	1 1/4	9 9/16	**RKRF80**
FHL80	Long Handle	80	4.5°	9/16	1 1/4	12 7/16	**RKRF80**
FHF80*	Standard Flex Head	80	4.5°	9/16	1 1/4	9 5/8	**RKRF80**
FHLF80*	Long Flex Head	80	4.5°	9/16	1 1/4	13 11/16	**RKRF80**
FHBF80*	Bent Handle Flex Head	80	4.5°	9/16	1 1/4	13 5/16	**RKRF80**
FHOF80*	Offset Flex Head	80	4.5°	9/16	1 1/4	9 15/16	**RKRF80**
FHX80**	Locking Flex Head	80	4.5°	9/16	1 1/4	11 15/16	**RKRF80**

ASME®/ANSI® B107.10
*Uses RKRF841JT Flex Joint Repair Kit.
**Uses RKRF841JT Flex Joint Repair Kit and RKRFX936ALM Locking Mechanism Repair Kit.
FH936-12 Soft Grip Replacement Handle

⚠WARNING

- Do not use "cheater bars" on handles
- Read safety precautions on pages W1 to W4

RATCHETS

FC72

FCF72

Dual 80® Based Technology Compact Head Ratchets



- Compact head design offers greater accessibility
- Swivel head ratchets provide a variety of ratcheting positions

Stock No.	Description	Gear Teeth	Swing Arc	A	B	C	Repair Kit
FC72	Compact Head	72	5°	7/16	15/16	4 7/16	**RKRFC72**
FCF72	Compact Flex Head	72	5°	7/16	15/16	6 1/4	**RKRFC72**

ASME®/ANSI® B107.10

FR80

FHR80

FHRLF80

FRLF80

Dual 80 Technology Quick Release Ratchets

- Quick release button for rapid socket/accessory changes, even with greasy or oily hands
- Contoured handle for comfort and control
- Chrome finish for easy cleanup

Stock No.	Description	Gear Teeth	Swing Arc	A	B	C	Repair Kit
FR80	Standard Handle	80	4.5°	9/16	1 1/4	7 7/16	**RKRFR80**
FHR80	Soft Grip Handle	80	4.5°	9/16	1 1/4	9 9/16	**RKRFR80**
FHRLF80*	Soft Grip Long Flex Head	80	4.5°	9/16	1 1/4	13 11/16	**RKRFR80**
FRLF80*	Standard Long Flex Head	80	4.5°	9/16	1 1/4	11 1/2	**RKRFR80**

ASME/ANSI B107.10
*Uses RKRF841JT Flex Joint Repair Kit
FH936-12 Soft Grip Replacement Handle



Round Head Ratchets

The Snap-on® Round Head features up to 100 teeth to achieve the lowest possible swing arc.
Slim round head ratchets are perfect for the tightest of space constaints.

Stock No.	Description	Gear Teeth	Swing Arc	A	B	C	Repair Kit
FHNF100	Swivel Head	100	3.6°	11/16	1 3/4	12 1/2	**RKRFHNF100**
FN100	Round Head	100	3.6°	11/16	1 3/4	7 7/8	**RKRFHNF100**
FHCNF72	Compact Swivel Head	72	5°	7/16	1 1/4	6 7/8	**RKRFHCNF72**
FZERO	Gearless	N/A	–	5/8	1 1/2	7 1/2	**RKRFZERO**

ASME®/ANSI® B107.10
*FH936-12 Soft Grip Replacement Handle



Dual 80® Technology Low-Profile Ratchet

- Square drive design works with low-profile sockets to access restricted clearance areas without loss of strength
- Use with standard 3/8" drive sockets or other attachments
- Thin handle cross section allows for increased accessibility in tight quarters
- *Dual 80* Technology requires less arc to engage the next gear tooth
- Seven teeth in contact with gear to provide strength and durability

Stock No.	Description	Gear Teeth	Swing Arc	A	B	C	Repair Kit
RAF80	Low Profile	80	4.5°	7/16	1 1/4	7 1/2	**RKRRAF80**



Dual 80 Technology FOD (Foreign Object Damage) Ratchets

- Aviation and other critical applications where Foreign Object Damage prevention is crucial for success
- Designed to have the lowest profile and work with the shortest swing arc, providing better access to restricted areas

Stock No.	Description	Gear Teeth	Swing Arc	A	B	C
F80FOD	Standard Handle	80	4.5°	9/16	1 1/4	7 7/16
GF80FOD	Standard Handle, Industrial Finish	80	4.5°	9/16	1 1/4	7 7/16
GFL80FOD	Long Handle, Industrial Finish	80	4.5°	9/16	1 1/4	10 5/16

ASME/ANSI B107.10

⚠WARNING

- Do not use "cheater bars" on handles
- Read safety precautions on pages W1 to W4

RATCHETS

FCY72



Dual 80® Based Technology Hi-Lok® Ratchet

- Features a hole through the head and square drive so the fastener may be held steady with a hex wrench as the fastener's collar is tightened
- Snap-on® ratchets are put through rigorous testing to perform in the real world and provide trouble-free performance that stands the test of time
- *Snap-on* ratchets are designed to have the lowest profile and work with the shortest swing arc, providing better access to restricted areas
- *Dual 80* Ratchet Technology features dual pawls and a 72-tooth gear, providing more power in less lateral space
- Six teeth in full contact with gear to provide strength and durability
- 5° ratcheting arc means shorter movement between tooth engagement
- Sealed head keeps dirt and other contaminants out of the head mechanism
- For use with standard or *Hi-Lok* sockets

Stock No.	Description	Gear Teeth	Swing Arc	A	B	C	Repair Kit
FCY72	Standard Handle	72	5°	7/16	15/16	4 5/8	RKRFCY72

ASME®/ANSI® B107.10

FZ936A

PALMRAT

Special Application Ratchets

Stock No.	Description	Gear Teeth	Swing Arc	A	B	C	Repair Kit
FZ936A	Multi-Purpose	36	10°	5/8	1 3/16	3 1/4	RKRF936
PALMRAT	Palm Style	20	18°	1 3/16	—	2 5/8	RKRPALMRAT



F77



FRS70A

Ratchet Adaptor

Stock No.	Description	Gear Teeth	Swing Arc	A	B
F77	Ratchet Adaptor	20	18°	13/16	2 3/16

ASME/ANSI B107.10

Ratchet Spinner

Stock No.	Description	A	B
FRS70A	Ratchet Spinner	1 1/4	1 5/16

ASME/ANSI B107.10

BREAKER BARS

F10LC

F12LA

FHBB12



Breaker Bars

Stock No.	Description	A	B	C	Repair Kit
F10LC*	Standard Handle	13/16	9 9/16	1/2	RKBB2
F12LA*	Long Handle	13/16	11 9/16	1/2	RKBB2
FHBB12*	Soft Grip Handle	13/16	13	1/2	RKBB2

**ASME/ANSI* B107.10

DRIVE HANDLES

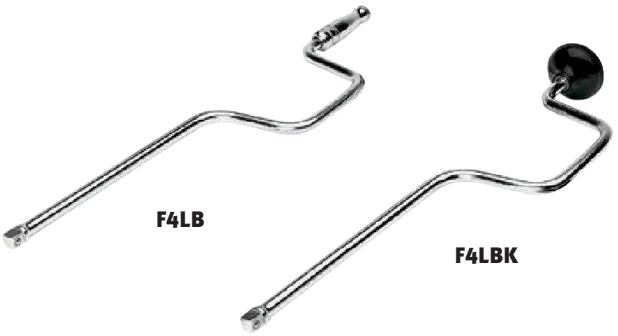



Speeders

Stock No.	A	B	C	D
F4LB	13/32	7 7/8	3 1/2	17 27/32
F4LBK*	13/32	7 7/8	3 1/2	16 5/8

*Speeder with knob



Sliding T-handle

Stock No.	A	B	C
F5L	3/4	13/32	8



Handled Drivers

Stock No.	A	B	C
F40B	1/2	1	5 5/16
SGF50BR*	1/2	3 3/32	8

*Instinct® Handle

EXTENSIONS

Knurled

Knurling at the drive end provides for easy fingertip turning.

Stock No.	Industrial Stock No.	A	B	Set Contains: 208AFX	206AFX
FX1*	GFX1	1/2	1 1/2	•	•
FX2	–	31/64	2		
FXK3	GFXK3	13/32	3	•	•
FXK4	–	13/32	4	•	•
FXK6	GFXK6	13/32	6	•	•
FXK8	GFXK8	13/32	8	•	•
FXK11	GFXK11	13/32	11	•	•
FX18	–	1/2	18	•	
FX24A	–	1/2	24	•	
FX36	–	1/2	36		

*Not Knurled
Sets do not include industrial part number

Sets include storage tray

Quick Release, Locking

- Releases socket from extension quickly and easily
- Knurling at drive end provides easy fingertip turning

Stock No.	A	B	Set Contains: 204FXKLA
FXKL3A	1/2	3	•
FXKL6A	1/2	6	•
FXKL8A	1/2	8	
FXKL11A	1/2	11	•
FXKL12A	1/2	12	
FXKL24A	1/2	24	•

FXKLP Locking pins for FXKL Series Extensions; five-pack.
FXKLRK Repair kit for FXKL Series Extensions

Set shown includes storage tray

⚠WARNING

- Do not use "cheater bars" on handles
- Do not use chrome or industrial finish hand tools with impact drivers
- Read safety precautions on pages W1 to W4

EXTENSIONS

206AFXW

206AFXWP

Wobble

- Wobble function provides 16° of additional accessibility
- Knurled shanks for easy fingertip turning

Stock No.	A	B	Set Contains: 206AFXW
FXW1*	1/2	1 1/2	•
FXWK3	13/32	3	•
FXWK4	13/32	4	•
FXWK6	13/32	6	•
FXWK8	13/32	8	•
FXWK11	13/32	11	•

*Not Knurled

Set shown includes storage tray

Wobble Plus

- Usable in wobble and rigid functionality
- Wobble function provides 16° additional accessibility
- Knurled shanks for easy fingertip turning

Stock No.	A	B	Set Contains: 206AFXWP
FXWP1*	1/2	1 1/2	•
FXWP3	13/32	3	•
FXWP4	13/32	4	•
FXWP6	13/32	6	•
FXWP8	13/32	8	•
FXWP11	13/32	11	•

*Not Knurled

Set shown includes storage tray

203FXWKL



Locking Wobble Set

- Provides 16° of additional accessibility
- Quick release locking sleeve provides secure connection and easy socket removal
- Knurled release collar for easy one-hand operation, even with slippery hands

Stock No.	A	B	Set Contains: 203FXWKL
FXWKL3	1/2	3	•
FXWKL6	1/2	6	•
FXWKL11	1/2	11	•

Set shown includes storage tray

FZ1

Connectors

FZ1 Connector

- 3/8" drive extension connector adds versatility to extensions, breaker bars, ratchets and crowfoot wrenches
- Connect one or more tools for a variety of ways to reach limited access fasteners
- Use in automotive, aircraft, marine, heavy truck, plumbing and manufacturing applications

FZ2 Connector Set

- Set of two FZ1

RATCHET/SOCKET ACCESSORIES

Adaptors

Stock No.	Industrial Stock No.	A	B	C
–	GFAT1E	3/8	1/4	1 1/4
TA3	GTA3	1/4	3/8	15/16
A2A	GAF2A	3/8	1/2	1 5/16
–	GSAF1F	1/2	3/8	1 13/16

206EAU Adaptor/Extension Set

- Includes GFAT1E and A2A adaptors; FU8A universal joint and FX1, FXK3 and FXK6extensions (6pc) in storage tray

1206GS Combination Drive Adaptor Set

- Includes 1/4" drive GFAT1E and TA3 adaptors, 3/8" drive A2A and GSAF1F adaptors and 1/2" drive GLA12B and GLAS1E adaptors (6pc) in storage tray



206EAU



1206GS

Magnetic Adaptors



Stock No.	A	B	C
FXM112	5/16	9/32	1 25/32
FXM18	3/16	9/32	1 25/32

FXM18

Hex-To-Square Adaptors

- 1/4" hex size; 1" length of hex



Stock No.	A	B
AB3042	Ball Detent	2
AB3044	Ball Detent	4
AB3046	Ball Detent	6

AB3046

Universal Joints



Stock No.	Industrial Stock No.	A	B
FUL8A	–	3/4	3
FU8A**	GFU8A	3/4	2 1/16
FU80B**	–	11/16	1 11/16
FUB8A*	–	3/4	2 5/16

*Swivel Universal Joint **ASME®/ANSI® B107.10

FUL8A

FU8A 103UFTS

FUL8A Locking Pin
- Locking pin for better socket retention

103UFTS Combination Drive Universal Joint Set
- Includes 1/4" drive TMU8B, 3/8" drive FU8A and 1/2" drive S8
- Universal joints in storage tray (3pc)

Non-marring Metric Socket Inserts

- Designed for use with Snap-on® 1/4" and 3/8" drive metric sockets
- Tough glass-reinforced nylon offers excellent strength yet will not damage soft metals, plated fasteners or powder-coated surfaces
- Large lip makes insert removal easy
- Set covers most popular metric sizes; inserts marked for easy identification
- Supplied on metal storage ring; avoid lost inserts
- Do not use socket inserts with impact tools

PSCM600

Stock No.	Socket Size	Fastener Size	Working Torque, in-lb	Set Contains: PSCM600
PSCM1208	12 mm	8 mm	80	•
PSCM1410	14 mm	10 mm	155	•
PSCM1612	16 mm	12 mm	240	•
PSCM1713	17 mm	13 mm	400	•
PSCM1915	19 mm	15 mm	450	•
PSCM2217	22 mm	17 mm	700	•

⚠WARNING

- Do not use chrome or industrial finish hand tools with impact drivers
- Read safety precautions on pages W1 to W4

FLANK DRIVE® SOCKETS

FM14

GFM9A

212FSMY



Shallow, mm

mm	6	12	12	A	B	C	D	E	Set Contains: 212FSMY 6	212FMY 12
6	FSM61	–	–	9.1	17.2	11.1	23.0	5.6		
7	FSM71	–	–	10.4	17.2	11.1	23.0	5.6		
8	FSM81	FM8	–	11.6	17.2	11.1	23.0	6.4	•	•
9	FSM91	FM9	GFM9A	13.1	17.2	11.0	23.0	7.1	•	•
10	FSM101	FM10	–	14.3	17.2	11.0	23.0	7.1	•	•
11	FSM111	FM11	–	15.4	17.2	11.0	23.0	7.1	•	•
12	FSM121	FM12	–	16.5	17.2	11.9	23.8	8.1	•	•
13	FSM131	FM13	–	18.0	17.2	12.6	24.6	8.1	•	•
14	FSM141	FM14	–	19.6	18.6	13.2	26.2	9.1	•	•
15	FSM151	FM15	–	20.3	19.4	13.7	27.0	9.1	•	•
16	FSM161	FM16	–	21.1	20.2	15.0	27.8	10.4	•	•
17	FSM171	FM17	–	22.7	21.8	15.0	28.6	10.4	•	•
18	FSM181	FM18	–	24.3	23.2	15.7	28.6	10.9	•	•
19	FSM191	FM19	–	25.1	24.0	16.3	30.2	11.9	•	•
20	FSM201	FM20	–	26.3	25.3	16.6	30.9	12.4		
21	FSM211	FM21	–	27.4	26.4	17.4	31.8	12.2		
22	FSM221	FM22	–	28.3	27.2	17.4	32.5	13.2		
23	FSM231	FM23	–	29.9	28.8	18.2	33.8	13.2		
24	FSM241	FM24	–	31.5	30.5	19.0	35.0	14.4		
25	FSM251	–	–	32.3	31.3	19.8	35.3	14.5		
26	FSM261	FM26	–	33.8	32.9	20.6	37.0	14.3		

Sets shown include magnetic storage tray

F201

GF201

211FSY

Shallow, inches

	6	12	6	12	A	B	C	D	E	Set Contains: 214FSY 6	211FSY 6	211FY 12
1/4	FS081	F081	GFS081	GF081	13/32	11/16	7/16	29/32	7/32	•	•	•
5/16	FS101	F101	GFS101	GF101	15/32	11/16	7/16	29/32	1/4	•	•	•
11/32	FS111	F111	–	GF111	1/2	11/16	7/16	29/32	9/32	•		
3/8	FS121	F121	GFS121	GF121	9/16	11/16	7/16	29/32	9/32	•	•	•
7/16	FS141	F141	GFS141	GF141	5/8	11/16	7/16	29/32	9/32	•	•	•
1/2	FS161	F161	GFS161	GF161	23/32	11/16	1/2	15/16	5/16	•	•	•
9/16	FS181	F181	GFS181	GF181	25/32	3/4	1/2	1 1/32	3/8	•	•	•
19/32	–	–	–	GF191	13/16	25/32	9/16	1 1/16	3/8			
5/8	FS201	F201	GFS201	GF201	27/32	25/32	19/32	1 3/32	1/2	•	•	•
11/16	FS221	F221	GFS221	GF221	15/16	7/8	5/8	1 1/8	17/32	•	•	•
3/4	FS241	F241	GFS241	GF241	1	15/16	11/16	1 3/16	15/32	•	•	•
13/16	FS261	F261	GFS261	GF261	1 1/16	1	11/16	1 7/32	1/2	•	•	•
7/8	FS281	F281	GFS281	GF281	1 5/32	1 1/32	23/32	1 9/32	9/16	•	•	•
15/16	FS301	F301	GFS301	GF301	1 1/4	1 3/16	25/32	1 11/32	9/16	•		
1	FS321	F321	GFS321	GF321	1 5/16	1 1/4	13/16	1 3/8	19/32	•		

Sets shown include magnetic storage tray



FSMS14 212FSMSY

Semi Deep, mm

Set Contains: 212FSMSY

mm	6	12	A	B	C	D	E	6
8	FSMS8	FMS8	11.4	17.2	29.3	41.3	7.1	•
9	FSMS9	FMS9	12.8	17.2	29.3	41.3	7.1	•
10	FSMS10	FMS10	14.3	17.2	29.3	41.3	7.9	•
11	FSMS11	–	15.7	17.2	29.3	41.3	9.7	•
12	FSMS12	FMS12	16.5	17.2	29.3	41.3	9.9	•
13	FSMS13	FMS13	17.9	17.2	23.2	41.3	10.7	•
14	FSMS14	FMS14	19.6	18.6	23.2	41.3	10.7	•
15	FSMS15	FMS15	20.3	19.4	23.2	41.3	10.7	•
16	FSMS16	FMS16	21.1	20.2	23	41.3	10.7	•
17	FSMS17	FMS17	22.6	21.8	23	41.3	11.2	•
18	FSMS18	FMS18	24.2	23.2	23.0	41.3	11.2	•
19	FSMS19	–	25.1	24.0	22.7	41.3	11.7	•

Sets shown include magnetic storage tray

FSS201 211FSSY

Semi Deep, inches, 6pt

Set Contains: 211FSSY

	6	A	B	C	D	E	6
1/4	FSS081	13/32	11/16	1 1/8	1 5/8	7/32	•
5/16	FSS101	15/32	11/16	1 1/8	1 5/8	1/4	•
3/8	FSS121	9/16	11/16	1 1/8	1 5/8	9/32	•
7/16	FSS141	5/8	11/16	1 1/8	1 5/8	3/8	•
1/2	FSS161	23/32	11/16	29/32	1 5/8	13/32	•
9/16	FSS181	25/32	3/4	29/32	1 5/8	13/32	•
5/8	FSS201	27/32	13/16	29/32	1 5/8	13/32	•
11/16	FSS221	15/16	29/32	29/32	1 5/8	7/16	•
3/4	FSS241	1	31/32	29/32	1 5/8	7/16	•
13/16	FSS261	1 1/16	1 1/32	29/32	1 5/8	15/32	•
7/8	FSS281	1 5/32	1 1/8	29/32	1 5/8	1/2	•

Sets shown include magnetic storage tray

FDS201

Semi Deep, inches, 12pt

	12	A	B	C	D	E
1/4	FDS081	13/32	11/16	1 1/8	1 5/8	7/32
9/32	FDS091	7/16	11/16	3/4	1 1/4	7/32
5/16	FDS101	15/32	11/16	3/4	1 1/4	1/4
3/8	FDS121	9/16	11/16	1	1 1/2	9/32
7/16	FDS141	5/8	11/16	29/32	1 1/2	3/8
1/2	FDS161	23/32	11/16	29/32	1 5/8	13/32
9/16	FDS181	25/32	3/4	7/8	1 5/8	13/32
5/8	FDS201	27/32	13/16	29/32	1 5/8	15/32
11/16	FDS221	15/16	29/32	29/32	1 5/8	1/2
3/4	FDS241	1	31/32	1 1/16	1 5/8	19/32
25/32	FDS251	1 1/16	1 1/32	1 1/16	1 5/8	5/8
13/16	FDS261	1 1/16	1 1/32	1 1/16	1 5/8	21/32
15/16	FDS301	1 1/4	1 7/32	1 3/16	1 3/4	23/32
1	FDS321	1 5/16	1 9/32	1 1/4	1 3/4	3/4

SFSM9 SFM19 212SFSMY

Deep, mm

Set Contains: 212SFSMY 212SFMY

mm	6	12	A	B	C	D	E	6	12
6	SFSM6	SFM6	9.1	17.2	42.0	54.0	5.6		
7	SFSM7	SFM7	10.5	17.2	42.0	54.0	5.6		
8	SFSM8	SFM8	11.4	17.7	42.0	54.0	7.1	•	•
9	SFSM9	SFM9	12.8	17.2	42.0	54.0	7.1	•	•
10	SFSM10	SFM10	14.3	17.2	42.0	54.0	7.9	•	•
11	SFSM11	SFM11	15.7	17.2	42.0	54.0	9.7	•	•
12	SFSM12	SFM12	16.5	17.2	42.0	54.0	9.9	•	•
13	SFSM13	SFM13	18.0	17.2	42.0	54.0	10.7	•	•
14	SFSM14	SFM14	19.6	18.6	43.3	60.3	10.7	•	•
15	SFSM15	SFM15	20.3	19.4	43.3	60.3	10.7	•	•
16	SFSM16	SFM16	21.1	20.0	43.3	60.3	10.7	•	•
17	SFSM17	SFM17	22.7	21.8	43.6	66.7	11.2	•	•
18	SFSM18	SFM18	24.3	23.2	49.0	66.7	11.2	•	•
19	SFSM19	SFM19	25.1	24.0	49.0	66.7	15.5	•	•
20	SFSM20	–	26.3	25.3	48.1	66.7	12.2		
21	SFSM21	–	27.5	26.4	47.6	66.7	12.4		

Sets shown include magnetic storage tray

222SFFS

224SFFSM

Shallow/Deep Combination Sets

222SFFS 6-Point Shallow/Deep Set
FS081–FS281 shallow sockets (except FS111) plus SFS081–SFS281 deep sockets (except SFS111) (1/4"–7/8") (22pc). Includes magnetic storage trays.

224SFFSM Metric 6-Point Shallow/Deep Set
FSM81–FSM191 shallow sockets plus SFSM8–SFSM19 deep sockets (24pc) (8 mm–19 mm). Includes magnetic storage trays.

⚠WARNING

- Do not use chrome or industrial finish hand tools with impact drivers
- Read safety precautions on pages W1 to W4

FLANK DRIVE® SOCKETS

SFS201

GSF181

211SFSY



Deep, inches

										Set Contains: 211SFSY	214SFY	211SFY
	6	12	6	12	A	B	C	D	E	6	12	12
1/4	SFS081	SF081	GSFS081	GSF081	15/32	11/16	1 11/16	2 1/8	1/4	•	•	•
9/32	–	SF091	–	–	7/16	11/16	1 5/8	2 1/8	7/32			
5/16	SFS101	SF101	GSFS101	GSF101	15/32	11/16	1 11/16	2 1/8	7/32	•	•	•
11/32	SFS111	SF111	–	–	1/2	11/16	1 11/16	2 1/8	9/32			
3/8	SFS121	SF121	GSFS121	GSF121	9/16	11/16	1 11/16	2 1/8	5/16	•	•	•
7/16	SFS141	SF141	GSFS141	GSF141	5/8	11/16	1 11/16	2 1/8	3/8	•	•	•
1/2	SFS161	SF161	GSFS161	GSF161	23/32	11/16	1 11/16	2 1/8	7/16	•	•	•
9/16	SFS181	SF181	GSFS181	GSF181	25/32	23/32	1 29/32	2 3/8	7/16	•	•	•
19/32	–	SF191	–	–	13/16	25/32	1 29/32	2 3/8	7/16		•	
5/8	SFS201	SF201	GSFS201	GSF201	27/32	13/16	1 29/32	2 3/8	15/32	•	•	•
11/16	SFS221	SF221	GSFS221	GSF221	15/16	7/8	2 3/16	2 5/8	1/2	•	•	•
3/4	SFS241	SF241	GSFS241	GSF241	1	1	2 3/16	2 5/8	5/8	•	•	•
25/32	–	SF251	–	–	1 1/16	1 1/32	1 3/4	2 5/8	5/8			
13/16	SFS261	SF261	GSFS261	GSF261	1 1/16	1	2 1/4	2 3/4	5/8	•	•	•
7/8	SFS281	SF281	GSFS281	GSF281	1 5/32	1 1/8	2 1/4	2 3/4	23/32	•	•	•
15/16	SFS301	SF301	GSFS301	GSF301	1 1/4	1 3/16	2 1/4	2 3/4	23/32		•	
1	SFS321	SF321	GSFS321	GSF321	1 5/16	1 1/4	2 1/4	2 3/4	13/16		•	

ASME®/ANSI® B107.1

Sets shown include magnetic storage tray

FLANK DRIVE LOW-PROFILE SOCKETS

RFM12

210RAFM

Low-Profile, mm

								Set Contains: 210RAFSM	210RAFM	209RFSM
mm	6	12	A	B	C	D	E	6	12	6
8	RFSM8	RFM8	11.6	16.5	—	16.8	3.8	•	•	•
9	RFSM9	RFM9	13.0	16.5	—	17.0	4.1			
10	RFSM10	RFM10	14.3	16.5	—	17.3	4.3	•	•	•
11	RFSM11	RFM11	16.0	16.5	—	17.7	4.8			
12	RFSM12	RFM12	17.2	16.5	9.8	18.1	5.1	•	•	•
13	RFSM13	RFM13	18.0	17.2	10.3	18.5	5.6	•	•	•
14	RFSM14	RFM14	19.6	18.8	10.5	18.7	6.1	•	•	•
15	RFSM15	RFM15	20.4	19.6	10.8	19.1	6.6	•	•	•
16	RFSM16	RFM16	21.1	20.4	11.4	19.6	7.1	•	•	•
17	RFSM17	RFM17	22.8	22.0	11.9	20.1	7.4	•	•	•
18	RFSM18	RFM18	24.3	23.6	12.5	20.8	7.9	•	•	•
19	RFSM19	RFM19	25.1	16.5	13.3	21.5	8.2			
	RAF80	Low-Profile Ratchet						•	•	

Sets shown include storage tray

FLANK DRIVE® LOW-PROFILE SOCKETS



Low-Profile, inches

RF181

210RARF

Set Contains:	210RARF	209RF

	12	A	B	C	D	E	12	12
1/4	RF081	.46	.65	—	.66	.11	•	•
5/16	RF101	.46	.65	—	.66	.15	•	•
11/32	RF111	.49	.65	—	.68	.17		
3/8	RF121	.56	.65	—	.69	.18	•	•
7/16	RF141	.61	.65	—	.70	.19	•	•
1/2	RF161	.71	.69	.39	.72	.21	•	•
9/16	RF181	.77	.74	.42	.75	.24	•	•
5/8	RF201	.83	.80	.47	.79	.28	•	•
11/16	RF221	.93	.90	.49	.81	.30	•	•
3/4	RF241	.99	.96	.50	.82	.31	•	•
	RAF80	Low-Profile Ratchet					•	

Sets shown include storage tray

FLANK DRIVE UNIVERSAL SOCKETS

Shallow, mm

FUM18A

206FSUMA

Set Contains:	206FSUMA	209FUMY

mm	6	12	A	B	D	E	6	12
8	FSUM8A	–	11.9	17.2	43.1	6.4		
10	FSUM10A	FUM10A	14.0	18.1	43.5	6.4	•	•
11	FSUM11A	–	15.3	18.1	43.5	7.1		
12	FSUM12A	FUM12A	16.8	18.1	45.5	7.9	•	•
13	FSUM13A	FUM13A	18.1	18.1	45.5	7.9	•	•
14	FSUM14A	FUM14A	18.9	18.1	47.9	8.9	•	•
15	FSUM15A	FUM15A	20.5	18.1	47.9	8.9	•	•
16	FSUM16A	FUM16A	21.3	18.1	47.9	10.2		•
17	FSUM17A	FUM17A	22.9	18.9	50.7	10.4	•	•
18	FSUM18A	FUM18A	24.5	18.9	50.7	10.7		•
19	FSUM19A	FUM19A	25.3	18.9	52.5	11.7		•
22	FSUM22A	–	28.4	18.9	53.9	13.0		

Sets shown include storage tray

Shallow, inches

FU16B

206AFSA

Set Contains:	206AFSA	206FUA

	6	12	A	B	D	E	6	12
5/16	–	FU10B	15/32	11/16	1 5/8	1/4		
3/8	FS12B	FU12B	17/32	11/16	1 5/8	1/4		
7/16	FS14B	FU14B	5/8	11/16	1 5/8	9/32	•	•
1/2	FS16B	FU16B	23/32	11/16	1 11/16	9/32	•	•
9/16	FS18B	FU18B	25/32	11/16	1 23/32	11/32	•	•
5/8	FS20B	FU20B	27/32	11/16	1 25/32	3/8	•	•
11/16	FS22B	FU22B	15/16	3/4	2	3/8	•	•
3/4	FS24B	FU24B	1	3/4	2 1/16	7/16	•	•
13/16	–	FU26B	1 3/32	3/4	2 3/32	15/32		
7/8	–	FU28B	1 5/32	3/4	2 3/32	1/2		
15/16	–	FU30A	1 1/4	3/4	2 9/32	9/16		
1	–	FU32A	1 5/16	3/4	2 9/32	9/16		

⚠WARNING

- Do not use "cheater bars" on handles
- Do not use chrome or industrial finish hand tools with impact drivers
- Read safety precautions on pages W1 to W4

FLANK DRIVE® UNIVERSAL SOCKETS

SFSUM14

206SFSUM



Deep, mm

Set Contains: 206SFSUM

mm	6	A	B	D	E	6
8	SFSUM8	11.9	17.2	63.6	6.9	
10	SFSUM10	14.4	18.1	63.6	7.4	•
11	SFSUM11	15.6	18.1	63.6	7.6	
12	SFSUM12	17.1	18.1	63.6	8.1	•
13	SFSUM13	18.1	18.1	63.6	8.4	•
14	SFSUM14	18.9	18.1	63.6	9.1	•
15	SFSUM15	20.5	18.1	63.6	9.7	•
16	SFSUM16	21.3	18.1	63.6	10.4	
17	SFSUM17	22.9	18.9	63.6	10.9	•
18	SFSUM18	24.5	18.9	63.6	10.9	
19	SFSUM19	25.3	18.9	63.6	11.9	

Set shown includes storage tray

FDSU22

207FSU

Deep, inches

Set Contains: 207FSU

	6	12	A	B	D	E	6
3/8	FSU12	FDSU12	9/16	11/16	2 13/32	3/8	•
7/16	FSU14	FDSU14	5/8	11/16	2 13/32	7/16	•
1/2	FSU16	FDSU16	23/32	11/16	2 13/32	15/32	•
9/16	FSU18	FDSU18	25/32	11/16	2 13/32	17/32	•
5/8	FSU20	FDSU20	27/32	11/16	2 13/32	9/16	•
11/16	FSU22	FDSU22	15/16	3/4	2 15/32	9/16	•
3/4	FSU24	FDSU24	1	3/4	2 15/32	9/16	•

Set shown includes storage tray

TORX® SOCKETS

207RFLE



Low-Profile Inverted *TORX*

Set Contains: 207RFLE

#	Stock No.	A	B	C	
8	RFLE80	17.2	11.4	17.3	•
10	RFLE100	17.2	12.8	20.6	•
11	RFLE110	17.2	14.3	21.1	•
12	RFLE120	17.2	15.6	21.7	•
14	RFLE140	17.2	16.9	23.0	•
16	RFLE160	17.9	18.7	24.3	•
18	RFLE180	19.5	20.3	25.4	•



TORX/Shallow

FLE160A

213AFLEY

#	Stock No.	A	B	C
E8	FLE80A	15/32	11/16	1 5/32
E10	FLE100A	1/2	11/16	1 5/32
E11	FLE110A	9/16	11/16	1 5/32
E12	FLE120A	9/16	11/16	1 5/32
E14	FLE140A	5/8	11/16	1 5/32
E16	FLE160A	3/4	11/16	1 1/4
E18	FLE180A	13/16	25/32	1 5/16

213AFLEY Combination Drive Shallow *TORX* Set
Includes 1/4" drive TLE40A–TLE100A, 3/8" drive FLE110A to FLE140A and 1/2" drive SLE160A–SLE240 (13pc) (E4–E24).

210AFLEY Combination Drive Shallow *TORX* Set
1/4" drive TLE40A–TLE80A plus 3/8" drive FLE100A–FLE180A (except FLE110A) (10pc) (E4–E18).

FLCE120

Shallow *TORX* with Countersink

#	Stock No.	A	B	C
E12	FLCE120	19/32	11/16	1 5/32
E14	FLCE140	11/16	5/8	1 5/32
E16	FLCE160	23/32	3/4	1 1/4
E18	FLCE180	25/32	13/16	1 5/16

FLCE120 *TORX* Socket with Countersink
- Use to remove/install fasteners that hold window regulators in place for BMW® 5 and 7 Series

FLCE140 *TORX* Socket with Countersink
- For connecting rod cap bolts on various Toyota® and Scion® vehicles
- The FLCE140 is similar to *Toyota* special tool number 09013-1C551

FLCE160 *TORX* Socket with Countersink
- For cam sprocket on 2.5L FB engine on 2011 and current Subaru Forester® vehicles
- Camshaft timing gear assembly on various 2012 *Toyota* vehicles
- Similar to *Toyota* special tool number 09013-1C560

FLCE180 *TORX* Socket with Countersink
- Spider gear in the rear differential on a 2010–current Chevrolet® Camaro® vehicles

FLEP180

TORX Plus®

#	Stock No.	A	B	C
EP18	FLEP180	3/4	13/16	1 5/16

FLEP180 *TORX Plus* Socket
Use to remove seat hold down nuts on 1999 and later GM® full-size pickup trucks. 3/8" square drive.

GFLEPL180

FLEPL140

TORX Plus w/ Countersink

Size	Stock No.	Industrial Stock No.	A	B	C
8EP	FLEPL80	GFLEPL80	7/16	11/16	1 5/32
10EP	FLEPL100	GFLEPL100	1/2	11/16	1 5/32
12EP	FLEPL120	GFLEPL120	19/32	11/16	1 5/32
14EP	FLEPL140	GFLEPL140	5/8	11/16	1 5/32
16EP	FLEPL160	GFLEPL160	3/4	23/32	1 1/4
18EP	FLEPL180	GFLEPL180	13/16	25/32	1 5/16

FLEL80

Long *TORX* Socket

#	Stock No.	A	B	C
E8	FLEL80	19/32	7/16	5

Application: Fits Delco® alternator Model CS130 found on both *GM* passenger and light trucks.



FSE180

TORX/Universal

#	Stock No.	A	B	C	D
E8	FSE80	3/8	11/16	9/32	1 5/8
E10	FSE100	15/32	11/16	5/16	1 11/16
E12	FSE120	9/16	11/16	11/32	1 25/32
E14	FSE140	5/8	11/16	13/32	1 7/8
E16	FSE160	23/32	3/4	15/32	2 1/16
E18	FSE180	13/16	3/4	1/2	2 1/16
E20	FSE200	15/16	3/4	9/16	2 1/8

WARNING

- Do not use chrome or industrial finish hand tools with impact drivers
- Read safety precautions on pages W1 to W4

SPLINE SOCKETS

Snap-on® spline wrenching tools have been developed to service high tensile strength spline nuts and bolts widely used on both military and commercial aircraft. Precise, radial spline teeth engage the fastener over a wider area to minimize stress, and allow application of high torque to reduce risk of damage to the fastener or to the tool.

Chrome tools comply with AS954, Military Spec. MS-33787 and MIL-W-8982. (Industrial finish tools comply with performance specifications and differ only in finish.) The unique spline wrenching configuration can also be used on ordinary six- and 12-point fasteners with an advantage similar to the *Snap-on* Flank Drive® wrenching system.



209TFES

Shallow, inches

FES200B

		Stock No.	A	B	C	D	E
#12	3/8	FES120B	17/32	21/32	15/32	1 1/16	11/32
#14	7/16	FES140B	5/8	11/16	1/2	1 3/32	7/16
#16	1/2	FES160B	23/32	23/32	—	1 3/32	—
#18	9/16	FES180B	13/16	13/16	—	1 3/32	15/32
#20	5/8	FES200B	7/8	7/8	—	2 3/8	9/16

209TFES Shallow Spline Socket Set
- Includes 1/4" drive TES7B–TES10B and 3/8" drive FES120B–FES200B Shallow Spline Sockets (9pc) (#7–#20, 7/32"–5/8") in magnetic socket tray

Deep, mm

FELM10A

	mm	Stock No.	A	B	C	D	E
#10	10	FELM10A	14.5	16.8	40.4	54.0	10.0

207TFEL

Deep, inches

FEL200B

		Stock No.	A	B	C	D	E
#12	3/8	FEL120B	17/32	21/32	1 17/32	2 1/8	11/32
#14	7/16	FEL140B	5/8	11/16	1 17/32	2 1/8	7/16
#18	9/16	FEL180B	13/16	13/16	—	2 3/8	15/32
#20	5/8	FEL200B	7/8	7/8	—	2 3/8	9/16

207TFEL Deep Spline Socket Set
- Includes 1/4" drive TEL7B–TEL10B and 3/8" drive FEL120B–FEL200B Deep Spline Sockets (7pc) (#7–#20, 7/32"–5/8") in magnetic socket tray

Shallow Universal, inches

FESU160



		Stock No.	A	B	D	E
#12	3/8	FESU120	35/64	3/4	1 31/32	23/64
#14	7/16	FESU140	5/8	3/4	2 3/64	7/16
#16	1/2	FESU160	23/32	3/4	2 5/64	29/64
#18	9/16	FESU180	53/64	3/4	2 1/8	15/32

SAE Spec. MA1547A

Impact, inches

IMFES14



		Stock No.	A	B	C	D	E
#14	7/16	IMFES14	3/4	3/4	5/8	1 7/64	7/16

Double Square, inches

	Stock No.	A	B	C	D	E
1/4	F308	1/2	21/32	3/8	27/32	7/32
5/16	F310	9/16	21/32	3/8	27/32	1/4
3/8	F312	21/32	11/16	15/32	15/16	9/32
7/16	F314	25/32	11/16	17/32	1	5/16
1/2	F316	7/8	25/32	17/32	1	5/16
9/16	F318	1	29/32	19/32	1 1/8	7/16
5/8	F320	1 1/16	31/32	19/32	1 1/8	7/16



F318



210FRXM

Flank Drive® Flare Nut, mm

Set Contains: 210FRXM

mm	Stock No.	A	B	C	D	
10	FRXM10	16.9	18.3	53.3	7.2	•
11	FRXM11	18.1	18.7	53.3	8.3	•
12	FRXM12	19.3	18.3	53.3	8.8	•
13	FRXM13	20.4	19.1	62.5	9.4	•
14	FRXM14	22.0	20.5	62.5	10.4	•
15	FRXM15	22.6	21.0	71.6	11.2	•
16	FRXM16	23.5	21.9	71.6	11.7	•
17	FRXM17	25.1	23.5	78.0	12.7	•
18	FRXM18	25.9	24.3	83.8	13.5	•
19	FRXM19	26.7	25.1	89.9	14.2	•

207FRX

Flank Drive/Flare Nut, inches

Set Contains: 207FRX

	Stock No.	A	B	C	D	
3/8	FRX121	5/8	3/4	2 3/32	9/32	•
7/16	FRX141	23/32	3/4	2 3/32	11/32	•
1/2	FRX161	13/16	3/4	2 1/8	3/8	•
9/16	FRX181	7/8	13/16	2 15/32	13/32	•
5/8	FRX201	15/16	7/8	2 27/32	15/32	•
11/16	FRX221	1	15/16	3 7/32	1/2	•
3/4	FRX241	1 1/16	1	3 11/32	9/16	•

Set shown includes magnetic storage tray



PMM406

PMP406A

Pipe Plug, mm

mm	Stock No.	A	B	Stock No.	A	B
6	PMM406A	16.4	31.0	PMP406A	17.2	25.8
8	PMM408A	17.2	31.0	–	17.2	31.0
10	PMM410A	17.2	28.4	PMP410A	18.8	25.4

211PPPMY

Pipe Plug, inches

	Stock No.	B	Stock No.	B
3/16	PPM406A	1 1/8	–	1
1/4	PPM408A	1 1/8	PP408A	1
9/32	PPM409A	1 1/8	PP409A	1
5/16	PPM410A	1 1/8	PP410A	1
11/32	PPM411A	1 1/8	PP411A	1
3/8	PPM412A	1 1/8	PP412A	1

211PPPMY Internal/External Set
PPM406–PPM412 external sockets plus PP408–PP412 internal sockets (11pc) (3/16"–3/8").



B2190

Flank Drive/Pentagon (5-Point)

A specialty socket for servicing recessed five-point nuts found on tamper-resistant Buffalo covers used by gas, electric and some water companies to protect shutoff gates.

Stock No.	A	B	C
B2190	1 1/8	1/2	1 1/16



GF22

Drag Link

Applications include use on the engine oil fill cap on Kawasaki® UN1500, UN1600 and UN2000 motorcycles.

Stock No.	A	B	C
GF22	11/16	7/64	1 1/4

WARNING

- Do not use chrome or industrial finish hand tools with impact drivers
- Read safety precautions on pages W1 to W4

SPECIAL APPLICATION SOCKETS

Weatherhead®

WH290



Size, inches	Stock No.	A	B
3/8	FD120	11/16	1 1/4
7/16	FD140	13/16	1 1/4
15/32	FD150	7/8	1 1/4
1/2	FD160	15/16	1 1/4
17/32	FD170	1	1 1/4
9/16	FD180	1 1/16	1 1/4
19/32	FD190	1 1/16	1 1/4
21/32	FD210	1 3/16	1 3/8
11/16	FD220	1 3/16	1 3/8
3/4	FD240	1 1/4	1 3/8
25/32	FD250	1 1/4	1 3/8

206PFSXM



Swivel Ball Extension, mm

Set Contains: 206PFSXM

mm	6	12	A	B	C	D	E	6
10	PFSXM910B	–	19.1	14.4	9.5	5.6	243.4	•
11	PFSXM911B	–	19.1	15.6	9.5	6.3	243.8	•
12	PFSXM912B	–	19.1	16.9	9.5	6.8	244.6	•
13	PFSXM913B	–	19.1	18.4	12.4	7.6	245.9	•
14	PFSXM914B	–	19.1	19.8	12.4	9.1	247.9	•
15	PFSXM915B	–	19.1	20.4	12.4	9.1	247.4	•
13	–	PFLXM13B	19.1	18.4	12.4	7.6	245.9	

PFSXM910B and PFSXM912B

Applications: Toyota® and Lexus® vehicles transmission pan bolts plus several underdash applications. Volvo® vehicle: removing intake faster and easier.

TORQUE ADAPTORS

- Manufactured from special alloy steel
- Precision forged and heat treated for optimum strength and durability
- Double hex (12-point) configuration allows socket to engage single hex fastener every 30° rather than every 60°, allowing for better access in restricted areas
- Design features radius edges which will resist damage/nicks
- Center-to-center length on adaptor for easy torque calculations
- Larger sizes feature thicker construction for strength



208FRDHM

208FRDH

Standard, mm

Set Contains: 208FRDHM

Working Torque, in-lb	mm	6	A	B	C	D	E	12
420	10	FRDHM10	17.1	18.8	7.8	11.0	50.8	•
690	12	FRDHM12	18.8	18.8	8.2	11.0	50.8	•
720	13	FRDHM13	21.0	18.8	7.8	11.0	50.8	•
1050	14	FRDHM14	21.0	18.8	9.4	11.0	50.8	•
1,200	15	FRDHM15	25.1	18.8	7.8	11.0	50.8	•
1,400	16	FRDHM16	22.6	18.8	11.0	11.0	50.8	•
1,400	17	FRDHM17	25.1	18.8	12.4	11.0	50.8	
1,400	18	FRDHM18	22.4	18.8	13.3	11.0	50.8	•
1,400	19	FRDHM19	27.4	18.8	13.3	11.0	50.8	•

Standard, inches

Set Contains: 208FRDH

Working Torque, in-lb		12	A	B	C	D	E	12
190	5/16	FRDH101	0.475	.750	1/4	7/16	2	•
420	3/8	FRDH121	0.570	.750	5/16	7/16	2	•
500	7/16	FRDH141	0.655	.750	11/32	7/16	2	•
710	1/2	FRDH161	0.740	.750	11/32	7/16	2	•
1,050	9/16	FRDH181	0.825	.750	3/8	7/16	2	•
1,400	5/8	FRDH201	0.890	.750	7/16	7/16	2	•
1,400	11/16	FRDH221	0.989	.750	1/2	7/16	2	•
1,400	3/4	FRDH241	1.080	.750	1/2	7/16	2	•
2,706	15/16	FRDH301	1.374	.750	7/16	7/16	2	

Conventional Hex

SPLINE TORQUE ADAPTORS

Snap-on® spline wrenching tools have been developed to service high tensile strength spline nuts and bolts widely used on both military and commercial aircraft. Precise, radial spline teeth engage the fastener teeth over a wider area to minimize stress, and allow application of high torque to reduce risk of damage to the fastener or to the tool.

Chrome tools comply with Military Spec. MS-33787 and MIL-W-89823. The unique spline wrenching configuration can also be used on ordinary six- and 12-point fasteners with an advantage similar to the *Snap-on* Flank Drive® wrenching system.



Low Profile, inches

- Saves time by avoiding clearance issues when working on propeller assemblies.
- Works on Lycoming® and Continental® engines used in Piper®, Cessna® and Mooney® aircraft.

	Stock No.	Working Torque, in-lb	A	B	C	D	E
3/4	FRESL24	465 in-lb	1 5/64	3/4	3/16	7/16	2
7/8	FRESL28	605 in-lb	1 1/4	3/4	3/16	7/16	2

FRESL24

SPLINE TORQUE ADAPTORS



Spline, inches

#		Stock No.	Working Torque, in-lb	A	B-B1	C-C1
#7	7/32	FRES7	140	2	.375–.750	1/4–7/16
#8	1/4	FRES8	195	2	.400–.750	1/4–7/16
#9	9/32	FRES9	220	2	.445–.750	1/4–7/16
#10	5/16	FRES10	250	2	.490–.750	1/4–7/16
#12	3/8	FRES12	515	2	.590–.750	5/16–7/16
#14	7/16	FRES14	875	2	.680–.750	5/16–7/16
#16	1/2	FRES16	1,575	2	.745–.750	5/16–7/16
#18	9/16	FRES18	1,750	2	.825–.750	3/8–7/16
#20	5/8	FRES20	1,750	2	.895–.750	3/8–7/16
#22	11/16	FRES22	1,750	2	.997–.750	1/2–7/16
#24	3/4	FRES24	1,750	2	1.08–.750	9/16–7/16

FRES10

TORX® BIT SOCKETS



GFTX45E 207EFTXY

TORX/Standard

Set Contains: 207EFTXY

#	Stock No.	Stock No.	A	B	
T27	FTX27E	GFTX27E	1 3/4	FTX27E2	•
T30	FTX30E	GFTX30E	1 3/4	FTX30E2	•
T40	FTX40E	GFTX40E	1 3/4	FTX40E2	•
T45	FTX45E	GFTX45E	2 1/16	FTX45E2	•
T50	FTX50E	GFTX50E	2 1/16	FTX50E2	•
T55	FTX55E	GFTX55E	2 1/32	FTX55E2	•
T60	FTX60E	–	2 5/16	FTX60E2	

Sets shown include storage tray

207EFTXY and 212EFTXY sets also include the FTX47SE GM® Style *TORX* Socket Driver.

212EFTXY Combination *TORX* Set Includes 1/4" drive TTX8E–TTX25E *TORX* Drivers plus 3/8" drive FTX27E–FTX55E *TORX* Drivers and FTX47E *GM* style Driver (12pcs) (T8–T55 plus *GM* style T47) in storage tray.

207EFTXYSE

TORX/Stubby

Set Contains: 207EFTXYSE

#	Stock No.	A	B	
T27	FTX27SE	1 13/32	FTX27SE2	•
T30	FTX30SE	1 13/32	FTX30SE2	•
T40	FTX40SE	1 13/32	FTX40SE2	•
T45	FTX45SE	1 13/32	FTX45SE2	•
T47	FTX47SE	1 13/32	FTX47SE2	•
T50	FTX50SE	1 13/32	FTX50SE2	•
T55	FTX55SE	1 7/16	FTX55SE2	•

Set shown includes magnetic storage tray

207EFTXYSE Applications:
BMW® under dash and sensors in engine compartment. Porsche® 911® and Cayenne® ignition coil bolts. Honda® airbag control module inside passenger compartment of dashboard. Cadillac® water pump and oil drain plugs. Various applications on motorcycles.

FTXL40E

TORX/Long

#	Stock No.	A	B
T27	FTXL27E	4 1/4	FTXL27E2
T30	FTXL30E	4 1/4	FTXL30E2
T40	FTXL40E	4 1/4	FTXL40E2
T45	FTXL45E	4 1/4	FTXL45E2
T50	FTXL50E	4 1/4	FTXL50E2

210EFTXL Combination Long *TORX* Set
210EFTXY Combination Long *TORX* Set includes 1/4" drive TTXL8E–TTX25LE *TORX* Drivers plus 3/8" drive FTXL27E–FTX55LE *TORX* Drivers (10pcs) (T8–T55) in storage tray.

TORX/Heavy Duty Removal

#	Stock No.	A	B
T27	FTXB27E	1 13/16	FTXB27E2
T30	FTXB30E	1 13/16	FTXB30E2
T40	FTXB40E	1 13/16	FTXB40E2
T45	FTXB45E	2 1/16	FTXB45E2
T50	FTXB50E	2 1/16	FTXB50E2
T55	FTXB55E	2 1/64	FTXB55E2

Set shown includes magnetic storage tray

FTXB40E

209EFTXBY Heavy Duty Removal *TORX* Set
Includes 1/4" drive TTXB15E–TXB25E *TORX* Drivers plus 3/8"drive FTXB27E–FTXB55E *TORX* Drivers (9pcs) (T15– T55) in magnetic storage tray.

⚠WARNING

- Do not use chrome or industrial finish hand tools with impact drivers
- Read safety precautions on pages W1 to W4

TORX® BIT SOCKETS

✹ *TORX*/Tamper Resistant

FTXR50E



#	Stock No.	A	B
T27	FTXR27E	1 3/4	FTXR27E2
T30	FTXR30E	1 3/4	FTXR30E2
T40	FTXR40E	1 3/4	FTXR40E2
T45	FTXR45E	2 1/16	FTXR45E2
T50	FTXR50E	2 1/16	FTXR50E2

Set shown includes magnetic storage tray

210EFTXRY Tamper-Resistant Combination *TORX* Set Includes 1/4" drive TTXR8E–TTXR25E *TORX* Drivers plus 3/8" drive FTXR27E–FTXR50E *TORX* Drivers (10 pcs) (T8–T50) in magnetic storage tray.

211EFTXRTPY

TORX Plus®/Tamper Resistant

Five-lobe configuration. Two-piece pinless design holds bit securely in socket while facilitating quick bit replacement. Cold formed socket delivers a strong, durable tool. Chrome plating resists corrosion and cleans easily.

#	Stock No.	A	B
27IPR	FTXR27TPE	1 3/4	FTXR27TPE2
30IPR	FTXR30TPE	1 3/4	FTXR30TPE2
40IPR	FTXR40TPE	1 3/4	FTXR40TPE2
45IPR	FTXR45TPE	2 1/32	FTXR45TPE2
50IPR	FTXR50TPE	2 5/32	FTXR50TPE2
55IPR	FTXR55TPE	2 11/32	FTXR55TPE2

Set shown includes magnetic storage tray

FTXR40TPE *TORX Plus* Tamper-Resistant Socket Driver (40IPR)

- Quickly removes and replaces the Reverse Idler Shaft on 2001/2002 *Ford* Mustang GT™ vehicles using the TREMEC3650 Manual Transmission
- Also use on the camshaft bolts on 2008 Toyota® Tundra with the 5.7L engine
- Five-lobe configuration
- Two-piece pinless design holds bit securely in socket while facilitating quick bit replacement
- Cold formed socket delivers a strong, durable tool
- Chrome plating resists corrosion and clean easily
- For sale to authorized technicians only

211EFTXRTPY Tamper-Resistant Combination *TORX Plus* Set Includes 1/4" drive TTXR8TPE–TTXR25TPE *TORX Plus* Drivers plus 3/8" drive FTXR27TPE–FTXR55TPE *TORX Plus* Drivers (11 pcs) (8IPR–55IPR).

211EFTXRTPY Applications: 2003 *Ford* Mustang® transmissions, 2004 *Ford* F150 transfer case, 2004 Porsche® Cayenne® turbo air sensor, Delphi® and Stanadyne® pumps, Cummins® B and C engine injection pumps and John Deere® diesel injector pumps.

211EFTXTPY

✹ *TORX Plus*

TORX Plus fasteners may be found in almost all vehicles from the 1999 model year to present. Common applications include GM® transmissions bell housing bolts and Ford® seat belt anchors. T27IP size can be used to service Taurus® and Sable® front spring shields. Use of a standard *TORX* driver on *TORX Plus* fasteners may result in a rounded out fastener head or damaged driver.

#	Stock No.	A	B
27IP	FTX27TPE	1 3/4	FTX27TPE2
30IP	FTX30TPE	1 3/4	FTX30TPE2
40IP	FTX40TPE	1 3/4	FTX40TPE2
45IP	FTX45TPE	2 1/8	FTX45TPE2
50IP	FTX50TPE	2 1/8	FTX50TPE2
55IP	FTX55TPE	2 5/16	FTX55TPE2

Set shown includes magnetic storage tray

211EFTXTPY Combination Drive TORX Plus Set Includes 1/4" drive TTX8TPE–TTX25TPE Drivers plus 3/8" drive FTX27TPE–FTX55TPE Drivers (11 pcs) (8IP–55IP) in magnetic storage tray.

FTXEL45E

GFTX500E

✹ ✿ Special Application *TORX*

#	Stock No.	Description	A	B
T40	FTXEL40E	Extra Long	7 1/2	FTXEL40E2
T47	FTX47E	GM Style	2 1/16	FTX47E2
T45	FTXEL45E	Extra Long	7 11/16	FTXEL45E2
40IPR	FTXR40TPE	Tamper Resistant	1 3/4	FTXR40TPE2
T47	GFTX500E	GM Style	2 1/16	FTX500E2
T30	FTXEL30TPE	Extra Long	5	FTXEL30TPE2

FTXEL40E Applications include service on intake manifold bolts on *Ford* 5.0 L engines with fuel injection, model years 1985–1990.

FTX47E For use on *GM* door strikers.

FTXEL45E Quickly and easily access intake bolts on *Cummins* N14 diesel engines without removing the air pump. Can also be used on older *Cummins* NH Big Cam four diesel engines. 3/8" square drive.

GFTX500E For use on *GM* door strikers and seat belt bolts.

FTXEL30TPE For removing the engine harness from the firewall on 2007 and newer. For Volvo® trucks with D16, MPT 8 and MPT 10 engines, *Cummins* ISX fuel timing and metering actuators.

Hex/Standard, mm

mm		A	B	Set Contains: 211EFAMY	207EFAMY
2	FAM2E	47.8	FAM2E2		
2.5	FAM2.5E	47.8	FAM2.5E2		
3	FAM3E	47.8	FAM3E2		
4	FAM4E	52.3	FAM4E2	•	•
5	FAM5E	52.6	FAM5E2	•	•
6	FAM6E	52.6	FAM6E2	•	•
7	FAM7E	52.6	FAM7E2	•	•
8	FAM8E	52.6	FAM8E2	•	•
9	FAM9E	52.6	FAM9E2	•	•
10	FAM10E	52.6	SAM10E2	•	•
11	FAM11E	69.9	FAM11E2	•	
12	FAM12E	69.9	FAM12E2	•	
13	FAM13E	69.9	FAM13E2	•	
14	FAM14E	69.9	FAM14E2	•	

Sets include magnetic storage tray



211EFAMY

210EFTAMY Combination Metric Standard Hex Set Includes 1/4" drive TMAM2E–TMAM3E Standard Length Drivers plus 3/8" drive FAM4E–FAM10E Standard Length Drivers (10 pcs) (2 mm–10 mm).

Hex/Stubby, mm

mm		A	B
7	FAMXS7E	34.7	FAMXS7E2
8	FAMXS8E	35.7	FAMXS8E2
9	FAMXS9E	36.7	FAMXS9E2
10	FAMXS10E	37.7	FAMXS10E2

Set includes magnetic storage tray

208EFTAMXSY

208EFTAMXSY Metric Combination Stubby Hex Set Includes 1/4" drive TMAMXS3E–TMAMXS6E Stubby Drivers plus 3/8" drive FAMXS7E–FAMXS10E Stubby Drivers (8 pcs) (3 mm–10 mm)

Hex/Long, mm

mm		A	B	Set Contains: 206EFAML
4	FAML4E	153.9	FAML4E2	•
5	FAML5E	153.9	FAML5E2	•
6	FAML6E	153.9	FAML6E2	•
7	FAML7E	153.9	FAML7E2	•
8	FAML8E	153.9	FAML8E2	•
10	FAML10E	153.4	FAML10E2	•

206EFAML

Ball Hex/Standard, mm

mm		A	B
7	FABM7E	52.5	FABM7E2
8	FABM8E	52.5	FABM8E2
9	FABM9E	52.5	FABM9E2
10	FABM10E	52.5	FABM10E2

Set includes magnetic storage tray



208EFTABMY

208EFTABMY Metric Ball Hex Combination Set Includes 1/4" drive TMABM3E–TMABM6E Standard Length Drivers plus 3/8" drive FABM7E–FABM10E Standard Length Drivers (8 pcs) (3 mm–10 mm)

⚠WARNING

- Do not use chrome or industrial finish hand tools with impact drivers
- Read safety precautions on pages W1 to W4

METRIC HEX BIT SOCKETS

206EFABLM



Ball Hex/Long, mm

mm		A	B	206EFABLM Set Contains:
4	FABLM4E	129.3	FABLM4E2	•
5	FABLM5E	128.5	FABLM5E2	•
6	FABLM6E	128.5	FABLM6E2	•
7	FABLM7E	128.5	FABLM7E2	•
8	FABLM8E	127.3	FABLM8E2	•
10	FABLM10E	128.3	FABLM10E2	•

Set shown includes storage tray

Double Hex, mm

Double Hex socket drivers and Triple Square socket drivers cannot be interchanged between applications. Triple square socket drivers have 90° corners. Double hex socket drivers have 120° corners. Using a Triple Square tool in a Double Hex application will strip the bolt head. In general, Triple Square tools are used on European vehicles and Double Hex tools are used on Asian vehicles.

FADM8E



mm		A	B
8	FADM8E	51.3	FADM8E2
8	FADM8LE	121.9	FADM8LE2

FADM8E/FADM8LE Applications: Removal/installation of head bolts on Toyota® Tercel 1995 and later, and Paseo (1992–1997).

HEX BIT SOCKETS

208EGFAY

212EFTAY



GFA10E

Hex/Standard, inches

			A	B	Fits These Cap Screws	Fits These Set Screws	208EFAY Set Contains:	208EGFAY
1/8	FA4E	GFA4E	2 1/16	TMA4E2	—	1/4	•	•
9/64	FA4.5E	GFA4.5E	2 1/16	TMA4.5E2	#8	—	•	•
5/32	FA5E	GFA5E	2 1/16	FA5E2	#10	5/16	•	•
3/16	FA6E	GFA6E	2 1/16	FA6E2	1/4	3/8	•	•
7/32	FA7E	GFA7E	2 1/16	FA7E2	—	7/16	•	•
1/4	FA8E	GFA8E	2 1/16	FA8E2	5/16	1/2	•	•
5/16	FA10E	GFA10E	2 1/16	FA10E2	3/8	5/8	•	•
3/8	FA12E	GFA12E	2 3/32	FA12E2	7/16 and 1/2	3/4	•	•

Sets shown include storage tray

212EFTAY Combination Drive Standard Hex Set Includes 1/4" drive TMA2E–TMA3.5E Hex Drivers plus 3/8" drive FA4E–FA12E Hex Drivers (12 pcs) (1/16"–3/8").

208EFTAXSY



Hex/Stubby, inches

		A	B	Fits These Cap Screws	Fits These Set Screws
7/32	FAXS7E	1 5/16	FAXS7E2	—	—
1/4	FAXS8E	1 11/32	FAXS8E2	5/16"	1/2"
5/16	FAXS10E	1 13/32	FAXS10E2	3/8"	5/8"
3/8	FAXS12E	1 15/32	FAXS12E2	1/2"	3/4"

Set shown includes magnetic storage tray

208EFTAXSY Combination Drive Stubby Hex Set Includes 1/4" drive TMAXS4E–TMAXS6E Stubby Drivers plus 3/8" drive FAXS7E–FAXS12E Stubby Drivers (8 pcs) (1/8"–3/8").

Hex/Extra Long, inches

Set Contains: 206EFAL

		A	Fits These Cap Screws	Fits These Set Screws	B	
5/32	FA5LE	6 1/16	#10	5/16"	FA5LE2	•
3/16	FA6LE	6 1/8	1/4"	3/8"	FA6LE2	•
7/32	FA7LE	6 1/8	—	7/16"	FA7LE2	•
1/4	FA8LE	6 1/8	5/16"	1/2"	FA8LE2	•
5/16	FA10LE	6 1/16	3/8"	5/8"	FA10LE2	•
3/8	FA12LE	6 1/16	1/4"	3/4"	FA12LE2	•

Set shown includes storage tray



206EFAL

Ball Hex/Standard, inches

		A	B
7/32	FAB7E	2 3/32	FAB7E2
1/4	FAB8E	2 3/32	FAB8E2
5/16	FAB10E	2 3/32	FAB10E2
3/8	FAB12E	2 3/32	FAB12E2

Sets shown include magnetic storage tray



208EFTABY

208EFTABY Combination Standard Ball Hex Set Includes 1/4" drive TMAB4E–TMAB6E Ball Hex Drivers plus 3/8" drive FAB7E–FAB12E Ball Hex Drivers (8 pcs) (1/8"–3/8").

Ball Hex/Long, inches

Set Contains: 206EFABL

		A	B	
5/32	FABL5E	5 1/16	FABL5E2	•
3/16	FABL6E	5 1/16	FABL6E2	•
7/32	FABL7E	5 1/16	FABL7E2	•
1/4	FABL8E	5 1/16	FABL8E2	•
5/16	FABL10E	5 1/16	FABL10E2	•
3/8	FABL12E	5 1/16	FABL12E2	•

Sets shown include storage tray



206EFABL

Triple Square, mm

	mm	Stock No.	A	B
Standard Length	4	FTSM4E	48.5	FTSM4E2
	5	FTSM5E	48.5	FTSM5E2
	6	FTSM6E	48.5	FTSM6E2
	8	FTSM8E	58	FTSM8E2
	10	FTSM10E	67.8	FTSM10E2
Long	8	FTSM8LE	84.6	FTSM8LE2
	10	FTSM10LE	101.6	FTSM10LE2

Set shown includes storage tray



FTSM8LE

TSS7KIT

TSS7KIT Metric Set Includes 3/8" drive FTSM6E–FTSM10E Triple Square Drivers plus 1/2" drive STSM12E–STSM18E Triple Square Drivers (7 pcs) (4 mm–18 mm).

FTSM6E Various applications on European vehicles.

FTSM8E Remove and install head and accessory bolts on Mercedes®, and remove and install axle shaft bolts on VW® and Audi® vehicles.

FTSM10E Used for cylinder head bolts and drive shaft bolts on *Mercedes*, and remove and install axle shaft bolts on *VW* and *Audi* vehicles.

Double Hex socket drivers and Triple Square socket drivers cannot be interchanged between applications. Triple square socket drivers have 90° corners. Double hex socket drivers have 120° corners. Using a Triple Square tool in a Double Hex application will strip the bolt head. In general, Triple Square tools are used on European vehicles and Double Hex tools are used on Asian vehicles.

WARNING

- Do not use chrome or industrial finish hand tools with impact drivers
- Read safety precautions on pages W1 to W4

SPECIAL APPLICATION BIT SOCKETS

PFMTS2E

PFMTS4E



Mortorq®/Super Bit

#	Stock No.	A	B
MTS-0	PFMTS0E	1 3/4	PFMTS0E2
MTS-1	PFMTS1E	1 3/4	PFMTS1E2
MTS-2	PFMTS2E	1 3/4	PFMTS2E2
MTS-3	PFMTS3E	2 1/8	PFMTS3E2
MTS-4	PFMTS4E	2 1/8	PFMTS4E2

PFMTS1E Bit Socket
Applications: For seat tracks on 2009 Mazda 6®.
Other seat applications: Cadillac® CTS, Nissan® Maxima® and Altima.
PFMTS4E Bit Socket
Applications: Remove/install the bolts that secure the bell housing to the transmission on GM® 4L60 transmissions.

FLAT TIP BIT SOCKETS

F23E

GF31E





— Flat Tip, inches

	#	Stock No.	Industrial Stock No.	A	B
Standard Length	5/16 x .046	F23E	–	3	F23E2A
	5/16 x .055	F25E	GF25E	3	F25E2A
	5/16 x .066	F31E	GF31E	3 7/16	F31E2A
Short	1/4 x .037	F42E	–	1 13/16	F42E2
	5/16 x .057	F52E	–	1 13/16	F52E2
	3/8 x .068	F62E	GF62E	1 27/32	F62E2

PHILLIPS® TIP BIT SOCKETS

GFP22E

FP22E

FPS32E

FP34E



✚ *Phillips*

	#	Stock No.	Industrial Stock No.	A	B
Standard Length	#2	FP22E	GFP22E	2 1/16	FP22E2
	#3	FP32E	–	2 5/16	FP32E2
	#4	FP41E	–	1 21/32	FP41E2
Short	#3	FPS32E	–	1 29/32	SP32E2
Long	#2	FP24E	–	4 1/32	FP24E2
	#3	FP34E	–	4 1/32	FP34E2
	#4	FP42E	–	2 9/16	FP42E2

POZIDRIV® AND CLUTCH BIT SOCKETS

FPD32E

F29E



✚ *Pozidriv*

#	Stock No.	A	B
#2	FPD22E	2 1/16	FPD22E2
#3	FPD32E	2	FPD32E2

Clutch, Standard Length

	Stock No.	A	B
3/8	F29E	3/8	1 3/4
5/16	F30E	19/64	1 3/4

Impact Driver Sets

208EPIT Set. 8pc Includes:

Stock No.	Description
PIT120	Impact Driver
F42E	1/4" Flat Tip Driver
F52E	5/16" Flat Tip Driver
F62E	3/8" Flat Tip Driver
FP22E	#2 PHILLIPS® Driver
FP32E	#3 *PHILLIPS* Driver
FP42E	#4 *PHILLIPS* Driver
FPD22E	#2 POZIDRIV® Driver
PB108A	Storage Case

PIT120

PIT120 Impact Driver
Delivers cam action impact when struck with a hammer for loosening or tightening fasteners. Industrial finish.

208EPIT

PIT2230E Set. 36pc Includes:

Stock No.	Description
PIT120	Impact Driver
FA6E	3/16" Hex Driver w/ extra FA6E2 Bit
FA7E	7/32" Hex Driver w/ extra FA7E2 Bit
FA8E	1/4" Hex Driver w/ extra FA8E2 Bit
FA10E	5/16" Hex Driver w/extra FA10E2 Bit
FA12E	3/8" Hex Driver w/ extra FA12E2 Bit
F42E	1/4" Flat Tip Driver w/ extra F42E2 Bit
F52E	5/16" Flat Tip Driver w/ extra F52E2 Bit
F62E	3/8" Flat Tip Driver w/ extra F62E2 Bit
FP22E	#2 *PHILLIPS* Driver w/ extra FP22E2 Bit
FP32E	#3 *PHILLIPS* Driver w/ extra FP32E2 Bit
FP41E	#4 *PHILLIPS* Driver w/ extra FP41E2 Bit
FP42E	#4 *PHILLIPS* Driver w/ extra FP42E2 Bit
F29E	3/8" Clutch Socket Driver
F30E	5/16" Clutch Socket Driver
FPD22E	#2 *POZIDRIV* Driver
IMF120A	3/8" 6-point Impact Socket
IMF140A	7/16" 6-point Impact Socket
IMF160	1/2" 6-point Impact Socket
IMF180	9/16" 6-point Impact Socket
IMF200	5/8" 6-point Impact Socket
IMF220	11/16" 6-point Impact Socket
IMF240	3/4" 6-point Impact Socket
GF22	11/16" Drag Link Socket
KRA142B	Metal Box

PIT2230E Impact Driver Set
Includes PIT120 impact driver plus all sockets, screwdrivers and replacement bits (36pc) conveniently displayed in a storage tray that fits in the KRA142 metal box.

PIT2230E

⚠WARNING • Read safety precautions on pages W1 to W4

IMPACT ACCESSORIES

204IMXA

Snap Ring Retention Device Extensions

Stock No.	A	B	Set Contains: 204IMXA
IMX11	1/2	1 3/4	•
IMX31	1/2	3	•
IMX61	1/2	6	•
IMX111	1/2	11	•

Includes storage tray

IMXL61



Locking Extensions

- Quick release locking sleeve provides a secure connection plus easy socket removal
- Knurled release collar for easy one-hand operation, even with slippery hands

Stock No.	A	B
IMXL31	1/2	3
IMXL61	1/2	6
IMXL111	1/2	11

IMSFXL24

Locking Adaptors

- Quick release locking sleeve at the 3/8" drive

Stock No.	A	B	C	D
IMSFXL18	3/8 (locking)	1/2	21/32	18
IMSFXL24	3/8 (locking)	1/2	21/32	24
IMSFXL33	3/8 (locking)	1/2	21/32	33

IPF80B



Universal Joints (Impact)

Stock No.	Socket Attachment	A	B
IPF80B	Pin Type	1	2 1/8
IPF800B	Ball Type	1	2 1/8

202IPFX



Swivel Extensions

- Laser welded pivot pin allows smooth, full 30° swivel action for efficient power transfer
- Manufactured from special allond heat treated for optimum strength and durability
- Provides versatility for the technician as they can use any shallow, semieep, deep, 6-pt, 12-pt, metric or fractional impact socket – you are not limited to just one size

Stock No.	Shank Dia., inches	Length, inches	Set Contains: 202IPFX
IPFX6	9/16	6	•
IPFX9	9/16	9	•

Sets shown include magnetic storage tray



Shallow, mm

IMDFM14

214IMFMYA

Set Contains: 214IMFMYA | 207IMDFMYA

mm	6	12	A	B	C	D	E	6	12
8	IMFM8A	IMDFM8A	12.8	17.2	11.1	23.0	6.4	•	
9	IMFM9A	–	14.0	17.2	11.0	23.0	7.1	•	
10	IMFM10A	IMDFM10A	15.1	17.2	11.0	23.0	7.1	•	•
11	IMFM11A	IMDFM11A	16.7	18.8	11.6	23.8	7.1	•	
12	IMFM12	IMDFM12	18.8	18.0	11.6	23.8	7.1	•	•
13	IMFM13	IMDFM13	18.8	18.8	12.4	24.6	7.4	•	•
14	IMFM14	IMDFM14	20.4	20.4	13.5	27.0	9.1	•	•
15	IMFM15	IMDFM15	21.2	21.2	13.5	27.0	9.1	•	•
16	IMFM16	IMDFM16	22.7	22.7	14.1	27.8	10.4	•	
17	IMFM17	IMDFM17	24.3	24.3	14.4	28.2	10.2	•	•
18	IMFM18	IMDFM18	25.1	25.1	14.3	29.0	10.9	•	•
19	IMFM19	IMDFM19	26.7	26.7	15.6	30.6	11.7	•	
20	IMFM20	IMDFM20	28.3	28.3	16.5	30.9	12.2		
21	IMFM21	IMDFM21	28.8	28.8	17.5	29.5	12.2	•	
22	IMFM22	IMDFM22	29.9	29.9	18.3	32.9	13.0		
23	IMFM23	–	31.5	31.5	19.3	31.5	13.2		
24	IMFM24	–	32.6	32.6	21.1	33.0	14.5	•	

Dimensions in ( ) apply to 12-point sockets only.

Sets shown include magnetic storage tray

Shallow, inches

IMDF180

212IMFYA

Set Contains: 212IMFYA | 207IMDFY

11	6	12	A	B	C	D	E	6	12
5/16	IMF100A	–	1/2	11/16	3/8	7/8	1/4	•	
3/8	IMF120A	IMDF120A	9/16	11/16	7/16	7/8	3/16	•	•
7/16	IMF140A	IMDF140A	21/32	3/4	7/16	15/16	9/32	•	•
1/2	IMF160	IMDF160	3/4	3/4	7/16	15/16	9/32	•	•
9/16	IMF180	IMDF180	13/16	13/16	7/16	15/16	9/32	•	•
5/8	IMF200	IMDF200	29/32	29/32	7/16	15/16	9/32	•	•
11/16	IMF220	IMDF220	31/32	31/32	9/16	1 1/32	3/8	•	•
3/4	IMF240	IMDF240	1 1/16	1 1/16	9/16	1 3/32	13/32	•	•
13/16	IMF260	–	1 1/8	1 1/8	11/16	1 3/16	1/2	•	
7/8	IMF280	–	1 3/16	1 3/16	3/4	1 9/32	1/2	•	
15/16	IMF300	–	1 9/32	1 9/32	13/16	1 5/16	17/32	•	
1	IMF320	–	1 11/32	1 9/32	13/16	1 5/16	9/16	•	

Semi Deep, mm

IMFMS12

212IMFMSYA

Set Contains: 212IMFMSYA

mm	6	A	B	C	D	E	6
8	IMFMS8A	12.8	17.2	29.3	41.3	6.4	•
9	IMFMS9A	14.0	17.2	29.3	41.3	7.1	•
10	IMFMS10A	15.1	17.2	29.3	41.3	9.7	•
11	IMFMS11A	17.2	17.2	29.3	41.3	9.7	•
12	IMFMS12	18.0	18.0	29.3	41.3	9.7	•
13	IMFMS13	19.6	19.6	29.3	41.3	10.4	•
14	IMFMS14	20.4	20.4	29.3	41.3	10.4	•
15	IMFMS15	21.2	21.2	29.3	41.3	10.4	•
16	IMFMS16	22.7	22.7	29.3	41.3	10.4	•
17	IMFMS17	24.3	24.3	29.3	41.3	11.2	•
18	IMFMS18	25.1	25.1	29.3	41.3	11.2	•
19	IMFMS19	26.7	26.7	29.3	41.3	11.7	•
21	IMFMS21	29.2	25.1	29.3	65.7	12.4	

FLANK DRIVE® IMPACT SOCKETS



Semi Deep, inches

IMFS16

210IMFSYA

Set Contains: 210IMFSYA

11	6	A	B	C	D	E	6
5/16	IMFS10A	1/2	11/16	1 5/32	1 5/8	1/4	•
3/8	IMFS12A	9/16	11/16	1 5/32	1 5/8	9/32	•
7/16	IMFS14A	21/32	3/4	1 5/32	1 5/8	11/32	•
1/2	IMFS16	3/4	3/4	1 5/32	1 5/8	13/32	•
9/16	IMFS18	13/16	13/16	1 5/32	1 5/8	13/32	•
5/8	IMFS20	29/32	29/32	1 5/32	1 5/8	13/32	•
11/16	IMFS22	31/32	31/32	1 5/32	1 5/8	7/16	•
3/4	IMFS24	1 1/16	1 1/16	1 5/32	1 5/8	15/32	•
13/16	IMFS26	1 1/8	1 1/8	1 5/32	1 5/8	1/2	•
7/8	IMFS28	1 3/16	1 3/16	1 5/32	1 5/8	17/32	•

Set shown includes magnetic storage tray

Deep, mm

SIMDFM14

214SIMFMYA

Set Contains: 214SIMFMYA 214SIMDFMYA

mm	6	12	A	B	C	D	E	6	12
8	SIMFM8A	SIMDFM8A	12.8	17.2	38.1	54.0	6.4	•	•
9	SIMFM9A	SIMDFM9A	14.0	17.2	38.1	54.0	7.1	•	•
10	SIMFM10A	SIMDFM10A	15.1	17.2	38.1	54.0	9.7	•	•
11	SIMFM11A	SIMDFM11A	17.2	17.2	38.1	54.0	9.7	•	•
12	SIMFM12	SIMDFM12	18.0	18.0	38.1	54.0	9.7	•	•
13	SIMFM13	SIMDFM13	19.6	19.6	38.1	54.0	10.4	•	•
14	SIMFM14	SIMDFM14	20.4	20.4	42.7	60.3	10.4	•	•
15	SIMFM15	SIMDFM15	21.2	21.2	42.7	60.3	10.4	•	•
16	SIMFM16	SIMDFM16	22.7	22.7	42.7	60.3	10.4	•	•
17	SIMFM17	SIMDFM17	24.3	24.3	47.0	66.7	11.2	•	•
18	SIMFM18	SIMDFM18	25.1	25.1	47.0	66.7	11.2	•	•
19	SIMFM19	SIMDFM19	26.7	26.7	47.0	66.7	14.2	•	•
20	SIMFM20	–	28.3	28.3	47.0	66.7	12.2		
21	SIMFM21	SIMDFM21	28.9	28.9	47.0	66.7	12.4	•	•
22	SIMFM22	–	29.9	29.9	51.6	73.0	13.0		
23	SIMFM23	–	31.5	31.5	51.6	73.0	13.0		
24	SIMFM24	SIMDFM24	33.0	33.0	58.2	73.0	14.7	•	•

Sets shown include magnetic storage tray

Deep, inches

SIMF260

212SIMFYA

Set Contains: 207SIMFYA 212SIMFYA

11	6	A	B	C	D	E	6	6
5/16	SIMF100A	1/2	11/16	1 1/2	2 1/8	3/16		•
3/8	SIMF120A	9/16	11/16	1 1/2	2 1/8	9/32	•	•
7/16	SIMF140A	21/32	3/4	1 1/2	2 1/8	5/16	•	•
1/2	SIMF160	3/4	3/4	1 1/2	2 1/8	3/8	•	•
9/16	SIMF180	13/16	13/16	1 1/2	2 1/8	7/16	•	•
5/8	SIMF200	29/32	29/32	1 1/2	2 3/8	7/16	•	•
11/16	SIMF220	31/32	31/32	1 1/2	2 5/8	1/2	•	•
3/4	SIMF240	1 1/16	1 1/16	1 1/2	2 5/8	9/16	•	•
13/16	SIMF260	1 1/8	1 1/8	2 1/16	2 3/4	9/16		•
7/8	SIMF280	1 3/16	1 3/16	2 1/16	2 3/4	9/16		•
15/16	SIMF300	1 9/32	1 9/32	2 1/32	2 3/4	9/16		•
1	SIMF320	1 11/32	1 11/32	2 3/16	2 3/4	5/8		•

Sets shown include magnetic storage tray



207IPFM

IPDFM12A

Shallow, mm

mm	6	12	A	B	D	E	Set Contains: 207IPFM 6	212IPFM 6	207IPDFM 12
8	IPFM8C	–	13.2	22.2	49.8	6.4		•	
9	IPFM9C	–	14.0	25.1	52.1	6.4			
10	IPFM10C	IPDFM10A	15.4	22.2	50.8	7.1	•	•	•
11	IPFM11C	–	16.7	22.2	52.1	7.1		•	
12	IPFM12C	IPDFM12A	18.1	22.2	55.4	7.1	•	•	•
13	IPFM13C	IPDFM13A	18.9	22.2	54.1	7.9	•	•	•
14	IPFM14C	IPDFM14A	20.5	22.2	55.4	7.9	•	•	•
15	IPFM15C	IPDFM15A	21.2	22.2	56.4	7.9	•	•	•
16	IPFM16C	IPDFM16A	22.6	22.2	57.4	8.6		•	
17	IPFM17C	IPDFM17A	23.4	23.0	62.2	8.6	•	•	•
18	IPFM18C	IPDFM18A	25.1	23.0	64.0	9.7	•	•	•
19	IPFM19C	–	26.4	23.0	65.0	10.4		•	
21	IPFM21C	–	29.2	25.1	65.7	12.4		•	
22	IPFM22C	–	30.1	25.1	67.7	12.9			

Sets shown include storage tray

205IPF

IPF22C

Shallow, inches

	6	12	A	B	D	E	Set Contains: 205IPF 6
3/8	IPF12C	IPDF12A	9/16	7/8	1 31/32	1/4	
7/16	IPF14C	–	21/32	7/8	2 1/16	9/32	•
1/2	IPF16C	–	3/4	7/8	2 1/8	5/16	•
9/16	IPF18C	–	13/16	7/8	2 3/16	5/16	•
5/8	IPF20C	–	7/8	7/8	2 1/4	11/32	•
11/16	IPF22C	–	31/32	31/32	2 7/16	13/32	
3/4	IPF24C	–	1 1/16	29/32	2 19/32	7/16	•

Set shown includes storage tray

207IPSFM

IPSFM21A

Semi Deep, mm

mm	6	A	B	D	E	Set Contains: 207IPSFM 6
8	IPSFM8A	12.8	22.2	62.5	6.4	
10	IPSFM10A	15.1	22.2	64.1	9.7	•
11	IPSFM11A	17.2	22.2	65.6	9.7	
12	IPSFM12A	18.0	23.0	69.6	9.7	•
13	IPSFM13A	19.6	23.0	71.9	10.4	•
14	IPSFM14A	20.4	23.0	72.9	10.4	•
15	IPSFM15A	22.0	23.0	74.4	10.4	•
16	IPSFM16A	22.7	23.0	74.9	10.4	
17	IPSFM17A	24.3	23.0	76.0	11.2	•
18	IPSFM18A	25.1	23.0	77.5	11.2	•
19	IPSFM19A	26.7	23.0	79.0	14.2	
21	IPSFM21A	29.2	25.1	77.7	12.4	

Set includes magnetic tray

WARNING • Read safety precautions on pages W1 to W4

FLANK DRIVE® Impact Swivel Sockets

IPLFM12B

207IPLFM



Deep, mm

mm	6	A	B	D	E	207IPLFM Set Contains: 6
8	**IPLFM8B**	15.8	24.9	70.1	9.1	
10	**IPLFM10B**	15.8	24.9	70.1	9.1	•
12	**IPLFM12B**	16.6	24.9	73.0	9.7	•
13	**IPLFM13A**	18.8	22.2	79.5	10.4	•
14	**IPLFM14A**	20.4	22.2	81.0	10.4	•
15	**IPLFM15A**	21.2	22.2	82.6	10.4	•
16	**IPLFM16A**	23.0	25.0	86.0	10.4	
17	**IPLFM17A**	23.4	23.0	88.3	10.2	•
18	**IPLFM18A**	25.1	23.0	90.1	10.7	•
19	**IPLFM19A**	26.7	23.0	91.2	14.2	
21	**IPLFM21A**	29.2	25.3	92.2	12.4	

Set includes magnetic tray

IPLF18B

Deep, inches

	6	A	B	D	E
3/8	**IPLF12B**	9/16	7/8	2 15/16	1/4
7/16	**IPLF14B**	21/32	7/8	2 3/4	9/32
1/2	**IPLF16B**	3/4	7/8	2 3/4	5/16
9/16	**IPLF18B**	13/16	7/8	3 3/16	5/16
5/8	**IPLF20B**	7/8	7/8	3 1/4	11/32

SPECIAL APPLICATION SOCKETS

207IMFLE



TORX®

Various applications on heavy duty trucks with Mercedes-Benz® engines. Use E18 size for F550 brake rotor. Use E20 size for rear brake caliper bolts on BMW® X5 vehicles.

#	Stock No.	A	B	C	207IMFLE Set Contains:
E8	**IMFLE80A**	15/32	11/16	1 5/32	•
E10	**IMFLE100A**	1/2	11/16	1 5/32	•
E12	**IMFLE120A**	19/32	11/16	1 5/32	•
E14	**IMFLE140A**	5/8	11/16	1 5/32	•
E16	**IMFLE160A**	3/4	3/4	1 1/4	•
E18	**IMFLE180A**	25/32	25/32	1 5/16	•
E20	**IMSLE200**	15/16	15/16	1 1/2	•

Set shown includes magnetic storage tray



209TFSMYA

Twist, Shallow, inches/mm

Twist sockets remove rounded/damaged fasteners

11 mm	6	A	B	C	Set Contains: 209TFSMYA 6	Set Contains: 213TFSYA 6
3/8"	TFSY121A	11/16 (17.5)	9/16 (14.3)	1 1/4 (31.8)		•
7/16" (11)	TFSY141A	11/16 (17.5)	21/32 (16.7)	1 1/4 (31.8)	•	•
1/2"	TFSY161A	3/4 (19.1)	3/4 (19.1)	1 1/4 (31.8)		•
9/16"	TFSY181A	13/16 (20.6)	13/16 (20.6)	1 1/4 (31.8)		•
5/8" (16)	TFSY201A	29/32 (23.0)	29/32 (23.0)	1 1/4 (31.8)	•	•
11/16"	TFSY221A	31/32 (24.6)	31/32 (24.6)	1 3/8 (35.0)		•
3/4" (19)	TFSY241A	1 1/16 (27.0)	1 1/16 (27.0)	1 3/8 (35.0)	•	•
10	TFSY10A	11/16 (17.5)	19/32 (15.1)	1 1/4 (31.8)	•	•
12	TFSY12A	11/16 (17.5)	11/16 (17.5)	1 1/4 (31.8)	•	•
13	TFSY13A	3/4 (19.1)	3/4 (19.1)	1 1/4 (31.8)	•	•
14	TFSY14A	13/16 (20.6)	13/16 (20.6)	1 1/4 (31.8)	•	•
15	TFSY15A	13/16 (20.6)	27/32 (21.4)	1 1/4 (31.8)	•	•
17	TFSY17A	31/32 (24.6)	31/32 (24.6)	1 3/8 (35.0)	•	•

Sets shown include storage tray

213TSFSYA

Twist, Deep, inches/mm

11 mm	6	A	B	C	Set Contains: 213TFSFSYA 6
3/8"	TSFSY121A	11/16 (17.5)	9/16 (14.3)	2 1/8 (54.0)	•
7/16" (11)	TSFSY141A	11/16 (17.5)	21/32 (16.7)	2 1/8 (54.0)	•
1/2"	TSFSY161A	3/4 (19.1)	3/4 (19.1)	2 1/8 (54.0)	•
9/16"	TSFSY181A	13/16 (20.6)	13/16 (20.6)	2 3/8 (60.3)	•
5/8" (16)	TSFSY201A	29/32 (23.0)	29/32 (23.0)	2 3/8 (60.3)	•
11/16"	TSFSY221A	31/32 (24.6)	31/32 (24.6)	2 5/8 (66.7)	•
3/4" (19)	TSFSY241A	1 1/16 (27.0)	1 1/16 (27.0)	2 5/8 (66.7)	•
10	TSFSY10A	11/16 (17.5)	19/32 (15.1)	2 1/8 (54.0)	•
12	TSFSY12A	11/16 (17.5)	11/16 (17.5)	2 1/8 (54.0)	•
13	TSFSY13A	3/4 (19.1)	3/4 (19.1)	2 1/8 (54.0)	•
14	TSFSY14A	13/16 (20.6)	13/16 (20.6)	2 3/8 (60.3)	•
15	TSFSY15A	13/16 (20.6)	27/32 (21.4)	2 3/8 (60.3)	•
17	TSFSY17A	31/32 (24.6)	31/32 (24.6)	2 5/8 (66.7)	•

Set shown includes storage tray



DPFM12

Shallow 10pt.

mm	10	A	B	C	D	E
12	DPFM12	18.3	18.3	—	26.9	7.1

DPFM12 Shallow Impact Socket

- The DPFM12 is for clutch pressure plate bolts found on the flywheel assembly on Mitsubishi® Eclipse® and Dodge® Stratus® vehicles
- Formed from tough alloy steel
- Heat treated to a lower hardness to add impact resistance and ductility

WARNING • Read safety precautions on pages W1 to W4

POWER ACCESSORIES

PF11A

Locking Button Extensions (Power)

Use with power or impact sockets with retention holes.

Stock No.	A	B
PF3	1/2	3
PF6	1/2	6
PF11A	1/2	11

PA4E



Adaptors (Power)

Stock No.	Socket Attachment	A	B	C	D
PA4E	Pin Type	1/2	3/8	15/16	1 13/16
PA2A	Pin Type	3/8	1/2	3/4	1 5/16

A3042



Hex-To-Square Adaptors (Power)

Stock No.	Socket Attachemnt	A	B	C
A3042	Pin Type	1/4	1	2
A3044	Pin Type	1/4	1	4
A3046	Pin Type	1/4	1 1/4	6
A3017A	Pin Type	7/16	1 1/4	1 3/4

PFU8A



Universal Joint (Power)

Stock No.	Socket Attachment	A	B
PFU8A	Pin Type	3/4	1 31/32

POWER BIT SOCKETS

PFTX30E



TORX®/Power Drivers

#	Stock No.	A	B
T27	PFTX27E	1 3/4	FTX27E2
T30	PFTX30E	1 3/4	FTX30E2
T40	PFTX40E	1 3/4	FTX40E2

PFAM6E



Hex, mm (Power)

mm		A	B
4	PFAM4E	52.3	FAM4E2
5	PFAM5E	52.6	FAM5E2
6	PFAM6E	52.6	FAM6E2
7	PFAM7E	52.5	FAM7E2
8	PFAM8E	52.1	FAM8E2
9	PFAM9E	52.5	FAM9E2
10	PFAM10E	52.5	SAM10E2

PFA8E



Hex, inches (Power)

		A	Fits These Cap Screws	Fits These Set Screws	B
1/8	PFA4E	2 1/16	—	1/4"	TMA4E2
9/64	PFA4.5E	2 1/16	#8	—	TMA4.5E2
5/32	PFA5E	2 1/16	#10	5/16"	FA5E2
3/16	PFA6E	2 1/16	1/4"	3/8"	FA6E2
7/32	PFA7E	2 1/16	—	5/16"	FA7E2
1/4	PFA8E	2 1/16	7/16"	1/2"	FA8E2
5/16	PFA10E	2 1/16	3/8"	5/8"	FA10E2
3/8	PFA12E	2 1/16	1/4" and 1/2"	3/4"	FA12E2

Shallow Magnetic, mm

mm	6	12	A	B	D	E
10	MFIMM10A	MFIMMD10	15.1	17.2	29.1 (28.6)	4.7 (7.1)
12	MFIMM12	–	18.1	19.1	28.6	3.7
13	MFIMM13	–	19.4	19.4	28.6	3.9
15	MFIMM15	–	21.6	21.8	28.6	3.9

Dimensions in ( ) apply to 12 point sockets only

MFIMM15

MFIMMD10 12-Point Metric Shallow Magnetic Socket

- For use on Detroit Diesel® 60 series engines, the MFIMMD10 is used on the three camshaft gear thrust plate bolts located inside the camshaft gear cover within the front gear case on the engine
- Applies to 2002 and later 60 series *Detroit Diesel* engines with the compact gear case
- PLEASE NOTE: Earlier engines with the tall gear case have 13 mm six-point bolts. Please use MFIMM13 for this application

Shallow Magnetic, inches

	6	A	B	D	E
5/16	MFIM101	15/32	11/16	1 1/16	3/32
3/8	MFIM121	17/32	11/16	1 1/16	1/8
7/16	MFIM141	5/8	11/16	1 1/16	5/32
1/2	MFIM161	25/32	25/32	1 1/16	5/32
9/16	MFIM181	7/8	7/8	1 1/16	5/32

MFIM101

Deep Magnetic Spring Loaded, mm

mm	6	A	B	D	E
10	SMFIMM10B	15.1	17.2	50.8	7.1
12	SMFIMM12B	18.1	19.1	50.8	7.1
13	SMFIMM13B	19.4	19.4	50.8	7.6

SMFIMM13B

Surface Drive

Use in the industrial market for assembly line work. The lead in chamfer and special design of these sockets will engage with a fastener while rotating on a power nut runner.

Deep, mm

mm	6	A	B	C	D	E
10	DFSM10	14.5	17.2	42.5	54.0	8.4



DFSM10

Deep, inches

	6	A	B	C	D	E
7/16	DFS14	21/32	11/16	1 21/32	2 1/8	11/32

DFS14

Surface Drive (M-Series)

mm	6	A	B	C	D	E
8	M2108	12.7	19.1	16.5	31.8	5.6
10	M2110	16.5	19.1	16.5	31.8	7.4
10	M2210	16.5	19.1	39.1	50.8	7.4
15	M2115	22.2	22.2	25.4	38.1	11.4

M2115

⚠WARNING

- Do not use chrome or industrial finish hand tools with impact drivers
- Read safety precautions on pages W1 to W4

GENERAL SERVICE SETS

Build Your Own Set

The 206AFSP handle set is the foundation for the ideal basic general service set. Add any of the suggested socket sets or choose from various special purpose sockets available in fractional and metric sizes.

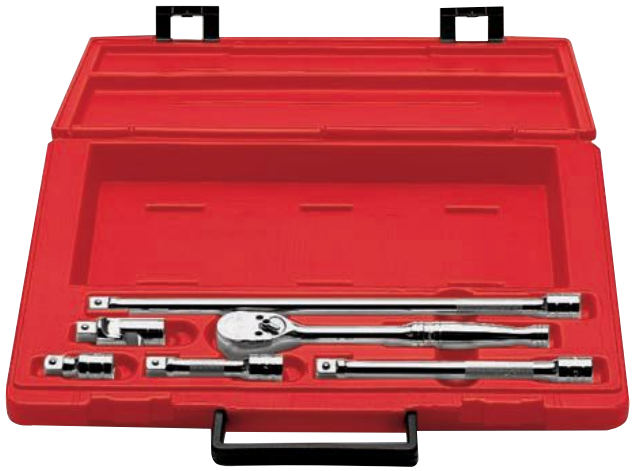

206AFSP

206AFSP Handle Set Includes:

- F80 sealed ratchet, FU8A universal joint, FX1 extension (1 1/2"), FXK3 knurled extension (3"), FXK6 knurled extension (6") and FXK11 knurled extension (11")
- 6pc in convenient PB16B storage case large enough to store four rows of standard length sockets, two rows of deep or universal sockets or a combination of the two

Suggested additions not included in set:

11	Stock No.	mm	Stock No.
6-Point Shallow Set	**211FSY**	6-Point Shallow Set	**212FSMY**
6-Point Deep Set	**211SFSY**	6-Point Deep Set	**212SFSMY**
12-Point Deep Set	**211SFY**	12-Point Deep Set	**212SFMY**
6-Point Deep Set	**207FSU**	6-Point Semi Deep Set	**212FSMSY**
		12-Point Shallow Set	**212FMY**

218AFSP

218AFSP 6-Point Fractional General Service Set 18 Tools, Includes:

11	6-Point Shallow Sockets
1/4	**FS081**
5/16	**FS101**
3/8	**FS121**
7/16	**FS141**
1/2	**FS161**
9/16	**FS181**
5/8	**FS201**
11/16	**FS221**
3/4	**FS241**
13/16	**FS261**
7/8	**FS281**

Also Includes:		
	F80	Standard Handle Sealed Ratchet
	F4LB	Speeder
	F10LC	Breaker Bar
	FU8A	Universal Joint
	FXK3	3" Knurled Extension
	FXK6	6" Knurled Extension
	FXK11	11" Knurled Extension

210AFSP

210AFSP 6-Point Fractional General Service Set 10 Tools, Includes:

	6-Point Shallow Sockets
3/8	FS121
7/16	FS141
1/2	FS161
9/16	FS181
5/8	FS201
11/16	FS221
3/4	FS241

Also Includes:		
	F80	Standard Handle Sealed Ratchet
	FXK3	3" Knurled Extension
	FXK6	6" Knurled Extension

222AFSP

222AFSP 6-Point Fractional General Service Set 22 Tools, Includes:

	6-Point Shallow Sockets		6-Point Deep Sockets
3/8	FS121	3/8	SFS121
7/16	FS141	7/16	SFS141
1/2	FS161	1/2	SFS161
9/16	FS181	9/16	SFS181
5/8	FS201	5/8	SFS201
11/16	FS221	11/16	SFS221
3/4	FS241	3/4	SFS241

Also Includes:		
	F80	Standard Handle Sealed Ratchet
	S9704KA	13/16" Spark Plug Socket
	S9706KA	5/8" Spark Plug Socket
	F10LC	Breaker Bar
	FU8A	Universal Joint
	FXK3	3" Knurled Extension
	FXK4	4" Knurled Extension
	FXK8	8" Knurled Extension

⚠WARNING

- Do not use chrome or industrial finish hand tools with impact drivers
- Do not use "cheater bars" on handles
- Read safety precautions on pages W1 to W4

GENERAL SERVICE SETS

218AFP

218AFP 12-Point Fractional General Service Set (Tools only) 18 Tools, Includes:

	12-Point Shallow Sockets
1/4	F081
5/16	F101
3/8	F121
7/16	F141
1/2	F161
9/16	F181
5/8	F201
11/16	F221
3/4	F241
13/16	F261
7/8	F281

Also Includes:		
	F80	Standard Handle Sealed Ratchet
	F4LB	Speeder
	F10LC	Breaker Bar
	FU8A	Universal Joint
	FXK3	3" Knurled Extension
	FXK6	6" Knurled Extension
	FXK11	11" Knurled Extension

248F

248F 12-Point Fractional General Service Set 48 Tools, Includes:

12-Point Shallow Sockets		12-Point Deep Sockets		12-Point Universal Sockets	
1/4	F081	1/4	SF081	5/16	FU10B
5/16	F101	5/16	SF101	3/8	FU12B
3/8	F121	3/8	SF121	7/16	FU14B
7/16	F141	7/16	SF141	1/2	FU16B
1/2	F161	1/2	SF161	9/16	FU18B
9/16	F181	9/16	SF181	5/8	FU20B
5/8	F201	5/8	SF201	11/16	FU22B
11/16	F221	11/16	SF221	3/4	FU24B
3/4	F241	3/4	SF241	13/16	FU26B
13/16	F261	13/16	SF261	7/8	FU28B
7/8	F281	7/8	SF281	15/16	FU30A
15/16	F301			1	FU32A

Also Includes:		
	F80	Standard Handle Sealed Ratchet
	F40B	Plastic Handle Driver
	FXK4	4" Knurled Extension
	FRS70A	Ratchet Spinner
	FXK6	6" Knurled Extension
	F4LB	Speeder
	F77	Ratchet Adaptor
	FXK11	11" Knurled Extension
	F5L	Sliding T-Handle
	FU8A	Universal Joint
	F10LC	Breaker Bar
	FXK3	3" Knurled Extension
	BLPEXTF388	8" Flexible Extension

292F

292F 6-/12- Point Fractional General Service Set 92 Tools, Includes:

6-Point Shallow Set: 211FSY	Shallow, 6-Point (11pc) ($^1/_4$"–$^7/_8$")
6-Point Deep Set: 211SFSY	Deep, 6-Point (11pc) ($^1/_4$"–$^7/_8$")
12-Point Deep Set: 211SFY	Deep, 12-Point (11pc) ($^1/_4$"–$^7/_8$")
12-Point Shallow Set: 211FY	Shallow, 12-Point (11pc) ($^1/_4$"–$^7/_8$")
12-Point Shallow Universal Sockets:	Universal, Shallow, 12-Point (12pc) ($^5/_{16}$"–1")

Also Includes:	**F80**	Standard Handle Sealed Ratchet	**S9704KFUA**	$^{13}/_{16}$" Spark Plug Universal Socket
	FLF80	Sealed Flex Head Ratchet	**GF22**	Drag Link Socket
	F4LB	Speeder	**F23E**	$^1/_4$" Flat Tip Socket Driver
	F5L	Sliding T-Handle	**F25E**	$^5/_{16}$" Flat Tip Socket Driver
	F10LC	Breaker Bar	**F31E**	$^3/_8$" Flat Tip Socket Driver
	F40B	Short Shank Driver	**F29E**	$^3/_8$" Clutch Type Driver
	FRS70A	Ratchet Spinner	**F30E**	$^5/_{16}$" Clutch Type Driver
	F77	Ratchet Adaptor	**FA5E**	$^5/_{32}$" Hex Driver
	FU8A	Universal Joint	**FA6E**	$^3/_{16}$" Hex Driver
	FX1	1 $^1/_2$" Extension	**FA7E**	$^7/_{32}$" Hex Driver
	FXK3	3" Knurled Extension	**FA8E**	$^1/_4$" Hex Driver
	FXK4	4" Knurled Extension	**FA10E**	$^5/_{16}$" Hex Driver
	FXK6	6" Knurled Extension	**FA12E**	$^3/_8$" Hex Driver
	FXK8	8" Knurled Extension	**PP409A**	$^9/_{32}$" Pipe Plug Socket
	FXK11	11" Knurled Extension	**PP410A**	$^5/_{16}$" Pipe Plug Socket
	FP22E	#2 PHILLIPS® Driver	**PP412A**	$^9/_{32}$" Pipe Plug Socket
	FP32E	#3 *PHILLIPS* Driver	**BLPEXTF388**	8" Flexible Extension
	FP42E	#4 *PHILLIPS* Driver	**F111**	$^{11}/_{32}$" Shallow Socket

⚠WARNING

- Do not use chrome or industrial finish hand tools with impact drivers
- Do not use "cheater bars" on handles
- Read safety precautions on pages W1 to W4

GENERAL SERVICE SETS

222AFSMP

222AFSMP 6-Point Metric General Service Set 22 Tools, Includes:

mm	6-Point Shallow Sockets:	mm	6-Point Deep Sockets:
10	FSM101	10	SFSM10
11	FSM111	11	SFSM11
13	FSM131	13	SFSM13
14	FSM141	14	SFSM14
15	FSM151	15	SFSM15
17	FSM171	17	SFSM17
19	FSM191	19	SFSM19

Also Includes:		
	F80	Standard Handle Sealed Ratchet
	FU8A	Universal Joint
	F10LC	Breaker Bar
	FXK3	3" Knurled Extension
	FXK4	4" Knurled Extension
	FXK8	8" Knurled Extension
	S9704KA	$^{13}/_{16}$" Spark Plug Socket
	S9706KA	$^{5}/_{8}$" Spark Plug Socket
	PB17B	Storage Case

262MFB

262MFB 6-/12-Point Metric General Service Set 61 Tools, Includes:

mm	6-Point Shallow Sockets	mm	12-Point Shallow Sockets	mm	12-Point Deep Sockets	mm	6-Point Shallow Universal Sockets
8	FSM81	9	FM9	8	SFM8	8	FSUM8A
9	FSM91	10	FM10	9	SFM9	10	FSUM10A
10	FSM101	11	FM11	10	SFM10	11	FSUM11A
11	FSM111	12	FM12	11	SFM11	12	FSUM12A
12	FSM121	13	FM13	12	SFM12	13	FSUM13A
13	FSM131	14	FM14	13	SFM13	14	FSUM14A
14	FSM141	15	FM15	14	SFM14	15	FSUM15A
15	FSM151	16	FM16	15	SFM15	16	FSUM16A
16	FSM161	17	FM17	16	SFM16	17	FSUM17A
17	FSM171	18	FM18	17	SFM17	18	FSUM18A
18	FSM181	19	FM19	18	SFM18	19	FSUM19A
19	FSM191			19	SFM19	22	FSUM22A

Also Includes:		
	F80	Standard Handle Sealed Ratchet
	F4LB	Speeder
	F10LC	Breaker Bar
	F40B	Plastic Handle Driver
	FRS70A	Ratchet Spinner
	F77	Ratchet Adaptor
	FU8A	Universal Joint
	FXK3	3" Knurled Extension
	FXK6	6" Knurled Extension
	FXK11	11" Knurled Extension
	S9704KR	$^{13}/_{16}$" Spark Plug Socket
	BLPEXTF388	8" Flexible Extension
	S9706KA	$^{5}/_{8}$" Spark Plug Socket
	S9716KA	$^{9}/_{16}$" Spark Plug Socket
	KRA21G	Metal Box

6-Point Metric Starter Set

High strength sealed head ratchet built for strength, precision and durability

- Sockets feature Flank Drive® wrenching system which grips the fastener on the flanks/flats increasing torque by up to 15%–20%
- Nickel chrome plating provides a wear-resistant finish along with a mirror-like finish
- Universal joint helps increase access to hard-to-reach fasteners (STARTERSET3)

Highest quality steel on breaker bar provides strength and durability (STARTERSET5)
Wobble engagement on extensions provides 16° of additional accessibility (STARTERSET5)

STARTERSET3

STARTERSET5

17 pieces, Includes:

mm	6-Point Deep Sockets	mm	6-Point Deep Sockets
8	**SFSM8**	14	**SFSM14**
9	**SFSM9**	15	**SFSM15**
10	**SFSM10**	16	**SFSM16**
11	**SFSM11**	17	**SFSM17**
12	**SFSM12**	18	**SFSM18**
13	**SFSM13**	19	**SFSM19**

Also Includes:		
	FL80	3/8" Dr. Long Handle Sealed Ratchet
	FU8A	Universal Joint
	FXK3	3" Knurled Extension
	FXK6	6" Knurled Extension
	S9706KA	5/8" Spark Plug Socket

17 pieces, Includes:

mm	6-Point Shallow Sockets	mm	6-Point Shallow Sockets
8	**FSM81**	14	**FSM141**
9	**FSM91**	15	**FSM151**
10	**FSM101**	16	**FSM161**
11	**FSM111**	17	**FSM171**
12	**FSM121**	18	**FSM181**
13	**FSM131**	19	**FSM191**

Also Includes:		
	F12LA	Breaker Bar
	F80	Standard Handle Sealed Ratchet
	FXWP1	1 1/2" Wobble Plus Extension
	FXWP3	3" Wobble Plus Extension
	FXWP6	6" Wobble Plus Extension

RATCHETS Blue-Point®

BPRFR938



BPRFR938SG

Quick Release Ratchets

Stock No.	Description	Gear Teeth	Swing Arc	A	B	C	Repair Kit
BPRFR938	Standard Handle	38	9.5°	9/16	1 9/32	7 3/4	**RKRBPRFR938**
BPRFR938SG	Soft Grip Handle	38	9.5°	9/16	1 9/32	7 3/4	**RKRBPRFR938**

ASME®/ANSI® B107.10

BPR703 Quick Release Ratchet Set 1/4" drive BPRTR936, 3/8" drive BPRFR938 and 1/2" drive BPRSR940 Ratchets (3pc) in storage tray.

BPR703SG Quick Release Ratchet Set 1/4" drive BPRTR936SG, 3/8" drive BPRFR938SG and 1/2" drive BPRSR940SG Soft Grip Ratchets (3pc) in storage tray.

⚠WARNING

- Do not use chrome or industrial finish hand tools with impact drivers
- Do not use "cheater bars" on handles
- Read safety precautions on pages W1 to W4

HANDLES AND ACCESSORIES Blue-Point®

FSD3KT

Ratchet Spinners

Stock No.	Square Drive, inches	Description	Set Contains: FSD3KT
FSD1	3/8 Male to 3/8 Female	Spinner Adaptor	•
FSD14	3/8 Male to 1/4 Female	Spinner Adaptor	•
FSD38	1/4 Male to 3/8 Female	Spinner Adaptor	•

ASME®/ANSI® B107.10

BLPBB3810

BLPCGHD388

Breaker Bar



Stock No.	Description	A	B	C
BLPBB3810	Standard Handle	7/8	9 31/32	1/2

Handled Driver



Stock No.	Description	C
BLPCGHD388	Spinner Handle	8 5/8

TURBOT103

BLPEXTK386

Turbo T-handle Speed Drivers

Stock No.	Description	Handle Type
F11TURBO	3/8" square drive	Turbo T-Handle

TURBOT103 Turbo T-handle Set
- T9TURBO (1/4" drive), TH10TURBO (1/4" hex) and F11TURBO (3/8" drive)
- Three pieces in storage tray

Knurled Extensions



Stock No.	B
BLPEXTK383	2 31/32
BLPEXTK386	5 29/32
BLPEXTK3810	9 29/32



203FXLBP



BLPLLEXT203

Locking Extensions

Stock No.	A	B	Set Contains: 203FXLBP
FXLBP3	1/2	3	•
FXLBP6	1/2	6	•
FXLBP10	1/2	10	•

Set shown includes storage tray

Extra Long Locking Extensions

- Smooth, durable chrome finish
- Made from tough 6130 steel
- Secure socket retention
- Lifetime warranty on individual extensions

Stock No.	A	B	Set Contains: BLPLLEXT203
BLPEXTL3812	1/2	12	•
BLPEXTL3818	1/2	18	•
BLPEXTL3824	1/2	24	•

Set shown includes storage tray

YA525A

Locking (Set Screw) Extension

- Allows easy and secure tool stacking
- Securely connects breaker bar, extensions and ratchets to socket and socket driver for overhead work
- Sliding sleeve for easy removal

Stock No.	A	B
YA525A	3/4	2 1/8

BLPEXTF388

Flexible Extension

Stock No.	Finish	Length, inches
BLPEXTF388	Chrome	8



BLPUJ38



BLPAFM3814

BLPAFM1438

Universal Joint

Stock No.	A	B
BLPUJ38	—	2 1/32

Adaptors

Stock No.	Description	A	B
BLPAFM3814	Square Drive Adaptor	3/8	1/4
BLPAFM1438	Square Drive Adaptor	1/4	3/8

⚠WARNING

- Do not use "cheater bars" on handles
- Do not use chrome or industrial finish hand tools with impact drivers
- Read safety precautions on pages W1 to W4

SOCKETS Blue-Point®

BLPLM3810

BLPLM3816

BLPLM3822

Deep, mm

mm	12	Length, mm
6	BLPLM386	64
7	BLPLM387	64
8	BLPLM388	64
9	BLPLM389	64
10	BLPLM3810	64
11	BLPLM3811	64
12	BLPLM3812	64
13	BLPLM3813	64
14	BLPLM3814	64
15	BLPLM3815	64
16	BLPLM3816	64
17	BLPLM3817	64
18	BLPLM3818	64
19	BLPLM3819	64
20	BLPLM3820	64
21	BLPLM3821	64
22	BLPLM3822	64
23	BLPLM3823	64
24	BLPLM3824	64

BLPSM389

BLPSM3815

BLPSM3822

Shallow, mm

mm	6	Length, mm
6	BLPSM386	25.5
7	BLPSM387	25.5
8	BLPSM388	25.5
9	BLPSM389	25.5
10	BLPSM3810	25.5
11	BLPSM3811	25.5
12	BLPSM3812	25.5
13	BLPSM3813	25.5
14	BLPSM3814	27
15	BLPSM3815	27
16	BLPSM3816	27
17	BLPSM3817	27
18	BLPSM3818	27
19	BLPSM3819	29
20	BLPSM3820	29
21	BLPSM3821	29
22	BLPSM3822	31
23	BLPSM3823	31
24	BLPSM3824	31

BLPL3838

BLPL3834

Deep, inches

	12	Length, inches
1/4	BLPL3814	2 17/32
5/16	BLPL38516	2 17/32
3/8	BLPL3838	2 17/32
7/16	BLPL38716	2 17/32
1/2	BLPL3812	2 17/32
9/16	BLPL38916	2 17/32
5/8	BLPL3858	2 17/32
11/16	BLPL381116	2 17/32
3/4	BLPL3834	2 17/32
13/16	BLPL381316	2 17/32
7/8	BLPL3878	2 17/32
15/16	BLPL381516	2 17/32
1	BLPL381	2 17/32

BLPS3838

BLPS3878

Shallow, inches

	6	Length, inches
1/4	BLPS3814	1
5/16	BLPS38516	1
3/8	BLPS3838	1
7/16	BLPS38716	1
1/2	BLPS3812	1
9/16	BLPS38916	1 1/16
5/8	BLPS3858	1 1/16
11/16	BLPS381116	1 1/16
3/4	BLPS3834	1 5/32
13/16	BLPS381316	1 5/32
7/8	BLPS3878	1 7/32
15/16	BLPS381516	1 7/32
1	BLPS381	1 7/32

BLPTE3810

BLPTE3818

TORX®

#	Stock No.	Length, inches
E4	BLPTE384	1 7/32
E5	BLPTE385	1 7/32
E6	BLPTE386	1 7/32
E7	BLPTE387	1 7/32
E8	BLPTE388	1 7/32
E10	BLPTE3810	1 7/32
E12	BLPTE3812	1 7/32
E14	BLPTE3814	1 7/32
E16	BLPTE3816	1 7/32
E18	BLPTE3818	1 7/32
E20	BLPTE3820	1 7/32

TORX® BIT SOCKETS Blue-Point®

TORX/Standard

BLPT3845

#	Stock No.	Length, inches
T40	BLPT3840	2
T45	BLPT3845	2
T50	BLPT3850	2

TORX/Long

BLPTL3845

#	Stock No.	Length, inches
T40	BLPTL3840	3 5/32
T45	BLPTL3845	3 5/32
T50	BLPTL3850	3 5/32

TORX/Tamper Resistant, Standard

BLPT3845TP

#	Stock No.	A
T10	BLPT3810TP	1 27/32
T15	BLPT3815TP	1 27/32
T20	BLPT3820TP	1 27/32
T25	BLPT3825TP	1 27/32
T27	BLPT3827TP	1 27/32
T30	BLPT3830TP	1 27/32
T40	BLPT3840TP	2
T45	BLPT3845TP	2
T50	BLPT3850TP	2
T55	BLPT3855TP	2

BLPTL3845TP

TORX/Tamper Resistant, Long

#	Stock No.	A
T40	BLPTL3840TP	4 3/8
T45	BLPTL3845TP	4 3/8
T50	BLPTL3850TP	4 3/8

METRIC HEX BIT SOCKETS Blue-Point

Hex, mm

BLPH3810

mm	⬡	Length, mm
6	BLPH386	47
7	BLPH387	47
8	BLPH388	50.5
9	BLPH389	50.5
10	BLPH3810	50.5

Hex Long, mm

BLPHL389

mm	⬡	Length, mm
7	BLPHL387	80.5
8	BLPHL388	80.5
9	BLPHL389	80.5
10	BLPHL3810	80.5

HEX BIT SOCKETS Blue-Point

Hex Standard, inches

BLPH3814

	⬡	A
7/32	BLPH38732	1 15/16
1/4	BLPH3814	1 15/16
5/16	BLPH38516	1 15/16
3/8	BLPH3838	1 15/16

Hex Long, inches

BLPHL38516

	⬡	Length, inches
7/32	BLPHL38732	3 5/32
1/4	BLPHL3814	3 5/32
5/16	BLPHL38516	3 5/32
3/8	BLPHL3838	3 5/32

⚠ WARNING

- Do not use chrome or industrial finish hand tools with impact drivers
- Read safety precautions on pages W1 to W4

TRIPLE SQUARE SOCKET BIT SOCKETS Blue-Point®

BLPXZNM389

Triple Square, mm

mm	Stock No.	Set Contains: BLPXZNM389
4	BLPXZNM384	•
5	BLPXZNM385	•
6	BLPXZNM386	•
8	BLPXZNM388	•
10	BLPXZNM3810	•
12	BLPXZNM3812	•
14	BLPXZNM3814	•
16	BLPXZNM3816	•
18	BLPXZNM3818	•

Set shown includes storage tray

PHILLIPS® AND POZIDRIV® BIT SOCKETS *Blue-Point*

BLPP383

BLPPD383

Phillips



II	Stock No.	A
#3	BLPP383	1 27/32
#4	BLPP384	1 27/32

Pozidriv



Size	Stock No.	A
#3	BLPPD383	1 27/32
#4	BLPPD384	1 27/32

COMBINATION BIT SOCKETS *Blue-Point*

BLPTSSC43

BLPTSSC43 Set (43pc)

BLPTSSC43 Combination TORX® Socket and Bit Socket Set

	Stock No.	Size	Drive Size, inches
Torx Tamper-Resistant Long Bit Sockets	BLPTL146TP	T6	1/4
	BLPTL147TP	T7	1/4
	BLPTL148TP	T8	1/4
	BLPTL149TP	T9	1/4
	BLPTL1410TP	T10	1/4
	BLPTL1415TP	T15	1/4
	BLPTL1420TP	T20	1/4
	BLPTL1425TP	T25	1/4
	BLPTL1427TP	T27	1/4
	BLPTL1430TP	T30	1/4
	BLPTL3840TP	T40	3/8
	BLPTL3845TP	T45	3/8
	BLPTL3850TP	T50	3/8
	BLPTL1255TP	T55	1/2
	BLPTL1260TP	T60	1/2
	BLPTSSC43PB	Storage Case	

	Stock No.	Size	Drive Size, inches
External *Torx* Sockets	BLPTE144	E4	1/4
	BLPTE145	E5	1/4
	BLPTE146	E6	1/4
	BLPTE147	E7	1/4
	BLPTE148	E8	1/4
	BLPTE3810	E10	3/8
	BLPTE3812	E12	3/8
	BLPTE3814	E14	3/8
	BLPTE3816	E16	3/8
	BLPTE1218	E18	1/2
	BLPTE1220	E20	1/2
	BLPTE1222	E22	1/2
	BLPTE1224	E24	1/2
Torx Tamper-Resistant Bit Sockets	BLPT146TP	T6	1/4
	BLPT147TP	T7	1/4
	BLPT148TP	T8	1/4
	BLPT149TP	T9	1/4
	BLPT1410TP	T10	1/4
	BLPT1415TP	T15	1/4
	BLPT1420TP	T20	1/4
	BLPT1425TP	T25	1/4
	BLPT1427TP	T27	1/4
	BLPT1430TP	T30	1/4
	BLPT3840TP	T40	3/8
	BLPT3845TP	T45	3/8
	BLPT3850TP	T50	3/8
	BLPT1255TP	T55	1/2
	BLPT1260TP	T60	1/2

BLPHSSC30 Set (30pc)

	Stock No.	Size	Drive Size, inches		Stock No.	Size	Drive Size, inches
Hex, inches	BLPH1418	1/8"	1/4	Hex, mm	BLPH1425	2.5 mm	1/4
	BLPH14964	9/64"	1/4		BLPH386	6 mm	3/8
	BLPH14532	5/32"	1/4		BLPH387	7 mm	3/8
	BLPH14316	3/16"	1/4		BLPH388	8 mm	3/8
	BLPH14732	7/32"	1/4		BLPH389	9 mm	3/8
	BLPH1414	1/4"	1/4		BLPH3810	10 mm	3/8
	BLPH38732	7/32"	3/8		BLPH123	3 mm	1/2
	BLPH3814	1/4"	3/8		BLPH124	4 mm	1/2
	BLPH38516	5/16"	3/8		BLPH125	5 mm	1/2
	BLPH3838	3/8"	3/8		BLPH126	6 mm	1/2
	BLPH12716	7/16"	1/2		BLPH1210	10 mm	1/2
	BLPH1212	1/2"	1/2		BLPHM1212	12 mm	1/2
	BLPH12916	9/16"	1/2		BLPH1214	14 mm	1/2
	BLPH1258	5/8"	1/2		BLPH1217	17 mm	1/2
	BLPH1234	3/4"	1/2		BLPH1219	19 mm	1/2

BLPHSSC30

BLPHSSC30 Hex Bit Socket Set

BLPTHC87 Set (87pc)

	Stock No.	Size	Drive Size, inches		Stock No.	Size	Drive Size, inches
External *Torx* Sockets	BLPTE144	E4	1/4	Metric Hex Bit Sockets	BLPH1425	2.5 mm	1/4
	BLPTE145	E5	1/4		BLPH123	3 mm	1/2
	BLPTE146	E6	1/4		BLPH124	4 mm	1/2
	BLPTE147	E7	1/4		BLPH125	5 mm	1/2
	BLPTE148	E8	1/4		BLPH126	6 mm	1/2
	BLPTE3810	E10	3/8		BLPH386	6 mm	3/8
	BLPTE3812	E12	3/8		BLPH387	7 mm	3/8
	BLPTE3814	E14	3/8		BLPH388	8 mm	3/8
	BLPTE3816	E16	3/8		BLPH389	9 mm	3/8
	BLPTE1218	E18	1/2		BLPH3810	10 mm	3/8
	BLPTE1220	E20	1/2		BLPH1210	10 mm	1/2
	BLPTE1222	E22	1/2		BLPHM1212	12 mm	1/2
	BLPTE1224	E24	1/2		BLPH1214	14 mm	1/2
Torx Bit Sockets	BLPT146	T6	1/4		BLPH1217	17 mm	1/2
	BLPT147	T7	1/4		BLPH1219	19 mm	1/2
	BLPT148	T8	1/4	Long Metric Hex Bit Sockets	BLPHL144	4 mm	1/4
	BLPT149	T9	1/4		BLPHL145	5 mm	1/4
	BLPT1410	T10	1/4		BLPHL146	6 mm	1/4
	BLPT1415	T15	1/4		BLPHL387	7 mm	3/8
	BLPT1420	T20	1/4		BLPHL388	8 mm	3/8
	BLPT1425	T25	1/4		BLPHL389	9 mm	3/8
	BLPT1427	T27	1/4		BLPHL3810	10 mm	3/8
	BLPT1430	T30	1/4	Fractional Hex Bit Sockets	BLPH1418	1/8"	1/4
	BLPT3840	T40	3/8		BLPH14964	9/64"	1/4
	BLPT3845	T45	3/8		BLPH14532	5/32"	1/4
	BLPT3850	T50	3/8		BLPH14316	3/16"	1/4
	BLPT1255	T55	1/2		BLPH14732	7/32"	1/4
	BLPT1260	T60	1/2		BLPH1414	1/4"	1/4
Long *Torx* Bit Sockets	BLPTL146	T6	1/4		BLPH38732	7/32"	3/8
	BLPTL147	T7	1/4		BLPH3814	1/4"	3/8
	BLPTL148	T8	1/4		BLPH38516	5/16"	3/8
	BLPTL149	T9	1/4		BLPH3838	3/8"	3/8
	BLPTL1410	T10	1/4		BLPH12716	7/16"	1/2
	BLPTL1415	T15	1/4		BLPH1212	1/2"	1/2
	BLPTL1420	T20	1/4		BLPH12916	9/16"	1/2
	BLPTL1425	T25	1/4		BLPH1258	5/8"	1/2
	BLPTL1427	T27	1/4		BLPH1234	3/4"	1/2
	BLPTL1430	T30	1/4	Long Fractional Hex Bit Sockets	BLPHL1418	1/8"	1/4
	BLPTL3840	T40	3/8		BLPHL14532	5/32"	1/4
	BLPTL3845	T45	3/8		BLPHL14316	3/16"	1/4
	BLPTL3850	T50	3/8		BLPHL38732	7/32"	3/8
	BLPTL1255	T55	1/2		BLPHL3814	1/4"	3/8
	BLPTL1260	T60	1/2		BLPHL38516	5/16"	3/8
					BLPHL3838	3/8"	3/8

BLPTHC87

BLPTHC87 TORX® Sockets/*TORX* and Hex Bit Socket Set

⚠WARNING

- Do not use chrome or industrial finish hand tools with impact drivers
- Read safety precautions on pages W1 to W4

GENERAL SERVICE SETS Blue-Point®

BLPPTEXT3

BLPPTA3438

BLPPTSM10

BPRFPT10

BLPPTSS3822

Pass Thru Socket Set

Size	Stock No.	External Hex, inches	Length, inches
8 mm	BLPPTSM8	3/4	1 7/16
9 mm	BLPPTSM9	3/4	1 7/16
10 mm	BLPPTSM10	3/4	1 7/16
11 mm	BLPPTSM11	3/4	1 7/16
12 mm	BLPPTSM12	3/4	1 7/16
13 mm	BLPPTSM13	3/4	1 7/16
14 mm	BLPPTSM14	3/4	1 7/16
15 mm	BLPPTSM15	3/4	1 7/16
16 mm	BLPPTSM16	3/4	1 7/16
17 mm	BLPPTSM17	3/4	1 7/16
18 mm	BLPPTSM18	3/4	1 7/16
19 mm	BLPPTSM19	3/4	1 7/16
3/8"	BLPPTS38	3/4	1 7/16
7/16"	BLPPTS716	3/4	1 7/16
1/2"	BLPPTS12	3/4	1 7/16
9/16"	BLPPTS916	3/4	1 7/16
5/8"	BLPPTS58	3/4	1 7/16
11/16"	BLPPTS1116	3/4	1 7/16
3/4"	BLPPTS34	3/4	1 7/16

BLPPTSS3822 Pass Thru Socket Set

Includes: BLPPTS38 through BLPPTS34 (3/8"–3/4") sockets, BLPPTSM8 through BLPPTSM19 (8 mm–19 mm) metric sockets, BLPPTA3438 square drive adaptor, BLPPTEXT3 extension and BPRFPT10 ratchet (22pc) in BLPPTSS3822PB storage case.

BPRFPT10 Ratchet
- Flex head has seven locking positions
- 3/4" hex drive, 10" long

BLPPTEXT3 Extension
- 3" extension

BLPPTA3438 Adaptor
- 3/8" square drive adaptor, 1 1/4" long

BLPGSSC100

BLPGSSC100 General Service Set

Components (1/4" drive):
- Ten fractional (3/16"–9/16") and 13 metric (4 mm–14 mm) standard sockets
- Six ratchet/socket accessories
- One ratchet

Components (3/8" drive):
- 13 fractional (1/4"–1") and 19 metric (6 mm–24 mm)
- 11 external TORX® sockets (E4–E20)
- Two spark plug sockets (5/8", 13/16")
- Five ratchet/socket accessories
- One ratchet

Components (Combination Wrenches):
- Nine fractional combination wrenches (1/4"–3/4")
- Ten metric combination wrenches (10 mm–19 mm)
- BLPGSSC100PB storage case

BLPGSSC155 General Service Set

Components (1/4" drive):

- Ten fractional (3/16"–9/16") and 13 metric (4 mm–14 mm) standard sockets
- Ten fractional (3/16"–9/16") and 11 metric (4 mm–14 mm) deep sockets
- 20 assorted 1/4" hex bits with bit holder
- Six ratchet/socket accessories
- One quick release ratchet

Components (3/8" Drive)

- 13 fractional (1/4"–1") and 19 metric (6 mm–24 mm) standard sockets
- 11 fractional (3/8"–1") and 15 metric (10 mm–24 mm) deep sockets
- 11 external TORX sockets (E4–E20)
- Two spark plug sockets (5/8", 13/16")
- Three metric hex socket drivers (7 mm, 8 mm, 10 mm)
- Four tamper resistant *TORX* socket drivers (T40, T45, T50, T55)
- Five ratchet/socket accessories
- One quick release ratchet
- BLPGSSC155PB storage case
- One Spinner Handle

BLPGSSC155

BLPGSS3837 General Service Set

Components (3/8" Drive):

- Eight fractional (5/16"–3/4") and 14 metric (6 mm–19 mm) standard six-point sockets
- Four fractional (5/16"–3/8", 7/16"–1/2", 9/16"–5/8", 11/16"–3/4") and 5 metric (10 mm–11 mm, 12 mm–13 mm, 14 mm–15 mm, 16 mm–17 mm, 18 mm–19 mm) double open end wrenches
- Two extensions: 3" and 6"
- One ratchet
- One universal joint
- Two adaptors: 1/4" f x 3/8" m, 3/8" f x 1/4" m
- BLPGSS3837PB storage box

BLPGSS3837

BLPGSS3885 General Service Set

Components (3/8" Drive):

- 13 fractional (1/4"–1") and 14 metric (6 mm–19 mm) standard sockets
- 13 fractional (1/4"–1") and 14 metric (6 mm–19 mm) deep sockets
- 11 external *TORX* sockets (E4–E20)
- One Phillips® socket drivers (#3 and #4)
- Two Pozidriv® socket drivers (#3 and #4)
- Eight tamper-resistant *TORX* socket drivers (T10–T45)
- Two spark plug sockets (5/8", 13/16")
- Six ratchet/socket accessories
- One ratchet
- BLPGSS3885PB storage case

BLPGSS3885

BLPGSS3849 General Service Set

Components (3/8" Drive):

- Eight fractional (5/16"–3/4") and 14 metric (6 mm–19 mm) standard 6-point sockets
- Eight fractional (5/16"–3/4") and 13 metric (7 mm–19 mm) deep 12-point sockets
- Two extensions (3" and 6")
- One universal joint
- 1 3/8"–1/4" adaptor
- 1 1/4"–3/8" adaptor
- One ratchet
- BLPGSS3849PB storage case

BLPGSS3849

⚠WARNING

- Do not use chrome or industrial finish hand tools with impact drivers
- Do not use "cheater bars" on handles
- Read safety precautions on pages W1 to W4

ALWAYS READY FOR HEAVY-DUTY.

When your tools are asked to perform – under pressure, and on heavy-duty applications – you need them to answer the call. Every time, without fail, no questions asked. That's why we built Snap-on® 1/2" drive tools to rise to every big occasion no matter which type of heavy machinery you're working on – from agricultural tractors, to skip loaders, to pile drivers and more.

GOING TO THE EXTREME.

You want tough tools? We got 'em. *Snap-on* drive tools are put through rigorous testing under the most extreme conditions. And if they can perform under these circumstances, they'll perform for you.

RATCHET UP YOUR CHOICES.

At Snap-on, you can afford to be selective – because we offer the widest range of tools in the industry. With a ratchet line that includes flex-head and long handle.

TOOLS FOR LIFE.

All our tools are designed to fit, and built to last a lifetime. That's why we use cold-formed alloy steel in most of our drive tools: for strength and durability.

Dual 80® Technology Ratchets

Stop, Turn and Listen. A smoother, stronger ratchet. Try them to believe them.

***Dual 80* Technology Ratchets Feature:**

- 80-tooth gear
- Seven teeth in contact with gear to provide strength and durability
- Up to 25% less ratcheting arc to engage the next gear tooth
- Sealed head keeps dirt and other contaminants out of the head mechanism



Stock No.	Description	Gear Teeth	Swing Arc	A	B	C	Repair Kit
S80A	Standard Handle	80	4.5°	3/4	1 5/8	10 5/16	RKRS80A
GS80A	Industrial Finish	80	4.5°	3/4	1 5/8	10 5/16	RKRS80A
SH80A	Soft Grip Handle	80	4.5°	3/4	1 5/8	12	RKRS80A
SL80A	Long Handle	80	4.5°	3/4	1 5/8	15	RKRS80A
SHL80A	Soft Grip Long Handle	80	4.5°	3/4	1 5/8	16 5/8	RKRS80A
SF80A*	Standard Flex Head	80	4.5°	3/4	1 5/8	17 11/16	RKRS80A
SHF80A*	Soft Grip Flex Head	80	4.5°	3/4	1 5/8	17 11/16	RKRS80A
SLF80A*	Long Flex Head	80	4.5°	3/4	1 5/8	24 13/16	RKRS80A
SHLF80A*	Soft Grip Long Flex Head	80	4.5°	3/4	1 5/8	25 3/4	RKRS80A
SX80B**	Locking Flex Head	80	4.5°	3/4	1 5/8	17 5/8	RKRS80A
SLX80A**	Long Locking Flex Head	80	4.5°	3/4	1 5/8	24 13/16	RKRS80A

ASME®/ANSI® B107.10
*Uses RKRSX936JT Flex Joint Repair Kit
**Uses RKRSX80AJT Flex Joint Repair Kit and RKRSX80ALM Locking Mechanism Repair Kit
SH936-12 Soft Grip Replacement Handle.

⚠WARNING

- Do not use "cheater bars" on handles
- Read safety precautions on pages W1 to W4

RATCHETS

Dual 80® Technology Ratchets

Stop, Turn and Listen. A smoother, stronger ratchet. Try them to believe them.

***Dual 80* Technology Ratchets Feature:**

- 80-tooth gear
- Seven teeth in contact with gear to provide strength and durability
- Up to 25% less ratcheting arc to engage the next gear tooth
- Sealed head keeps dirt and other contaminants out of the head mechanism



Stock No.	Description	Gear Teeth	Swing Arc	A	B	C	Repair Kit
SHX80B**	Soft Grip Locking Flex Head	80	4.5°	3/4	1 5/8	18 1/2	**RKRS80A**
SHLX80A**	Soft Grip Long Locking Flex Head	80	4.5°	3/4	1 5/8	25 3/4	**RKRS80A**
SKF80A*†	Stubby Handle	80	4.5°	3/4	1 5/8	7 9/16	**RKRS80A**

ASME®/ANSI® B107.10
*Uses RKRSX936JT Flex Joint Repair Kit
**Uses RKRSX80AJT Flex Joint Repair Kit and RKRSX80ALM Locking Mechanism Repair Kit
SH936-12 Soft Grip Replacement Handle.
†*ASME/ANSI* B107.10 with exception of the length.

Dual 80 Technology Quick Release Ratchets

- Quick release button for rapid socket/accessory changes, even with greasy or oily hands
- Contoured handle for comfort and control
- Chrome finish for easy cleanup



Stock No.	Description	Gear Teeth	Swing Arc	A	B	C	Repair Kit
SR80A	Standard Handle	80	4.5°	3/4	1 5/8	10 5/16	**RKRSR80A**
SHR80A	Soft Grip Handle	80	4.5°	3/4	1 5/8	10 5/16	**RKRSR80A**
SHRLF80A*	Soft Grip Long Flex Head	80	4.5°	3/4	1 5/8	25 3/4	**RKRSR80A**

ASME/ANSI B107.10
*Uses RKRSX936JT Flex Joint Repair Kit.
SH936-12 Soft Grip Replacement Handle.

Dual 80 Technology FOD (Foreign Object Damage) Ratchet

- Designed to help prevent foreign object damage in sensitive work environments
- Coverplate and reverse lever permanently affixed to ratchet head with rivets to prevent chance of small parts debris



Stock No.	Description	Gear Teeth	Swing Arc	A	B	C
S80AFOD	Standard Handle	80	4.5°	3/4	1 5/8	10 5/16

ASME/ANSI B107.10



SA936A

GSP936

Special Application Ratchets

Stock No.	Description	Gear Teeth	Swing Arc	A	B	C	Repair Kit
SA936A	Scaffold	36	10°	4 3/16	1 5/8	10 5/16	RKRSA936
GSP936	Spud	36	10°	3/4	1 5/8	15 5/8	RKRGSP936-1

ASME®/ANSI® B107.10

GSP936 Spud Ratchet
The "spud" ratchet is ideal for lining up holes in scaffolding and other construction jobs. A long reverse lever provides easy reversing even while wearing heavy work gloves. Locking button retention. Taper diameter is 3/16"–7/8". Taper length is 8".



S77A

Ratchet Adaptor

Stock No.	Description	Gear Teeth	Swing Arc	A	B	Repair Kit
S77A	Ratchet Adaptor	20	18°	1 5/8	3	RKRS77

ASME/ANSI B107.10



LRS70A

Ratchet Spinner

Stock No.	Description	A	B
LRS70A	Ratchet Spinner	1 3/4	1 5/8

ASME/ANSI B107.10

SN15B

SN18B

GSN18B

SN24C



Breaker Bars

Stock No.	Description	A	B	C	Repair Kit
SN15B	Standard Handle	1 1/8	15	11/16	RKBB3
SN18B	Standard Handle	1 1/8	18	11/16	RKBB3
GSN18B	Standard Handle, Industrial Finish	1 1/8	18	11/16	RKBB3
SN24C	Standard Handle	1 1/8	24	11/16	RKBB3

ASME/ANSI B107.10

⚠WARNING

- Do not use "cheater bars" on handles
- Read safety precautions on pages W1 to W4

BREAKER BARS



Breaker Bars

Stock No.	Description	A	B	C	Repair Kit
SHBB24	Standard Handle	1 1/8	24	11/16	RKBB3
SN25A	45° Offset Square	1 1/8	24	11/16	RKBB5
SN36	Standard Handle	1 1/4	36	3/4	RKBB4
SHN36	Soft Grip Handle	1 1/4	36 5/8	3/4	RKBB4

ASME®/ANSI® B107.10
SH936-12 Soft Grip Replacement Handle.

DRIVE HANDLES



Speeders

Stock No.	A	B	C	D
S4	1/2	7	4 3/8	4 3/8
SN4B*	5/8	6 3/8	3	3
SL4	1/2	7 3/8	4 7/16	4 7/16
N8323	1/2	18 1/16	8 1/2	8 1/2

ASME/ANSI B107.10
*Uses RKBB3 Repair Kit.

SL4 Locking Speeder
• Sliding collar and locking pin for better socket retention



Sliding T-Handle

Stock No.	A	B	C
S12L	1 11/16	5/8	12

ASME/ANSI B107.10

GSXK5

305ASX

Extensions

Set Contains: 305ASX

Stock No.	Industrial Stock No.	A	B	
SX2	–	5/8	2 1/8	•
SXK3	GSXK3	5/8	3 1/2	•
SXK5	GSXK5	5/8	5	•
SXK8	–	5/8	8	•
SXK10	–	5/8	10	
SXK11	GSXK11	5/8	11	•
SX15	–	5/8	15	
SX20	–	5/8	20	
SX24	–	5/8	24	
SX36	–	5/8	36	

ASME®/ANSI® B107.10M

Set includes storage tray

303SXKL



Quick Release (Locking)

Set Contains: 303SXKL

Stock No.	A	B	
SXKL3	21/32	3	•
SXKL5	21/32	5	•
SXKL10	21/32	10	•

SXKLP Locking Pins (5pk)
SXKLRK FXKL Series Repair Kit

GSXWK5

305ASXW

Wobble

- Provides 16° of additional accessibility
- Knurled shanks for easy fingertip turning

Set Contains: 305ASXW

Stock No.	Industrial Stock No.	A	B	
SXW2*	GSXW2	5/8	2	•
SXWK3	–	5/8	3 1/2	•
SXWK5	GSXWK5	5/8	5	•
SXWK8	–	5/8	8	•
SXWK11	GSXWK11	5/8	11	•

*Not Knurled
ASME/ANSI B107.10

Set shown includes storage tray

305SXWP

Wobble Plus

- Provides 16° of additional accessibility
- Usable in wobble and rigid functionality
- Knurled shanks for easy fingertip turning

Set Contains: 305SXWP

Stock No.	A	B	
SXWP2*	5/8	2	•
SXWP3	5/8	3	•
SXWP5	5/8	5	•
SXWP8	5/8	8	•
SXWP11	5/8	11	•

*Not Knurled
ASME/ANSI B107.10

Set shown includes storage tray

⚠WARNING

- Do not use "cheater bars" on handles
- Do not use chrome or industrial finish hand tools with impact drivers
- Read safety precautions on pages W1 to W4

EXTENSIONS

303SXWKL

Locking Wobble Set

- Provides 16° of additional accessibility
- Quick release locking sleeve provides secure connection and easy socket removal
- Knurled release collar for easy one-hand operation, even with slippery hands

Stock No.	A	B	303SXWKL Set Contains:
SXWKL3	21/32	3	•
SXWKL5	21/32	5	•
SXWKL8	21/32	8	•

Set shown includes storage tray

GALX3



Locking Adaptor

Stock No.	A	B	C
GALX3	1/2	1/2	3 1/8

ASME®/ANSI® B107.10

SOCKET/RATCHET ACCESSORIES

S8 GU8



Universal Joints

Stock No.	Industrial Stock No.	A	B
S8	GU8	15/16	2 11/16

ASME/ANSI B107.10M

103UFTS Combination Drive Universal Joint Set

- Includes 1/4" drive TMU8B, 3/8" drive FU8A and 1/2" drive S8
- Three pieces in storage tray

A2A

GLA12B



Adaptors

Stock No.	Industrial Stock No.	A	B	C
A2A	A2A	3/8	1/2	1 5/16
GSAF1F	GSAF1F	1/2	3/8	1 13/16
GAF2A	GAF2A	3/8	1/2	1 5/16
GLA12B	GLA12B	1/2	3/4	1 7/8
GLAS1F	GLAS1F	3/4	1/2	2 7/16

ASME/ANSI B107.10M

1206GS Combination Drive Adaptor Set

- Includes 1/4" drive GFAT1E and TA3 adaptors, 3/8" drive A2A and GSAF1F adaptors and 1/2" drive GLA12B and GLAS1E adaptors (six pieces) in storage tray

GAX12



Extension Adaptors

Stock No.	Retention Type	A	B	C
GAX5	Ball Type	1/2	3/8	5
GAX12	Ball Type	1/2	3/8	12
GAX24	Ball Type	1/2	3/8	23 1/4
GAX36	Ball Type	1/2	3/8	36

ASME/ANSI B107.10M



SWM241

310TWMYA

Shallow, mm

mm	6	12	A	B	C	D	E	Set Contains: 310TWMYA	313TWMYA	323TWM	310SWMYA	313SWMYA	323SWM*
10	TWM10A	SWM101A	15.0	23.2	22.2	38.1	7.9	•		•	•		•
11	TWM11A	SWM111A	16.6	23.2	22.2	38.1	8.7	•		•	•		•
12	TWM12A	SWM121A	18.2	23.2	22.2	38.1	9.5	•	•	•	•	•	•
13	TWM13A	SWM131A	19.0	23.2	22.2	38.1	10.3	•	•	•	•	•	•
14	TWM14A	SWM141A	20.6	23.2	22.2	38.1	10.3	•	•	•	•	•	•
15	TWM15A	SWM151A	22.2	22.2	22.2	38.1	10.3	•	•	•	•	•	•
16	TWM16	SWM161	23.8	22.2	22.2	38.1	11.9	•	•	•	•	•	•
17	TWM17	SWM171	24.6	23.2	22.2	38.1	12.7	•	•	•	•	•	•
18	TWM18	SWM181	25.4	23.8	21.4	38.1	14.2	•	•	•	•	•	•
19	TWM19	SWM191	26.3	24.8	21.3	38.1	13.9	•	•	•	•	•	•
20	TWM20	SWM201	26.7	26.1	21.2	38.1	14.0		•	•		•	•
21	TWM21	SWM211	28.3	27.5	21.1	38.1	14.0		•	•		•	•
22	TWM22	SWM221	29.9	28.6	20.9	38.1	14.2		•	•		•	•
23	TWM23	SWM231	31.2	29.9	20.8	38.1	14.5		•	•		•	•
24	TWM24	SWM241	32.5	30.9	22.2	38.8	15.8		•	•		•	•
25	TWM25	SWM251	33.3	31.7	22.2	38.8	15.8			•			•
26	TWM26	SWM261	34.9	33.3	23.8	41.2	15.8			•			•
27	TWM27	SWM271	36.5	34.9	25.4	42.8	17.4			•			•
28	TWM28	SWM281	38.1	36.5	26.9	44.4	17.4			•			•
29	TWM29	SWM291	39.3	38.0	26.1	44.5	17.8			•			•
30	TWM30	SWM301	41.0	39.6	26.1	44.5	18.5			•			•
31	TWM31	SWM311	42.5	41.2	29.1	47.6	19.1			•			•
32	TWM32	SWM321	42.5	41.2	28.9	47.6	19.8			•			•

Sets shown include storage tray unless noted

*Does not include storage tray

SW241

313TWYA

Shallow, inches

	6	12	6	12	A	B	C	D	E	Set Contains: 313TWYA	314GTWYA	313SWYA
3/8	TW121A	SW121A	GTW121A	GSW121A	19/32	29/32	7/8	1 1/2	5/16	•	•	•
7/16	TW141A	SW141A	GTW141A	GSW141A	11/16	29/32	7/8	1 1/2	11/32	•	•	•
1/2	TW161A	SW161A	GTW161A	GSW161A	3/4	29/32	7/8	1 1/2	13/32	•	•	•
9/16	TW181A	SW181A	GTW181A	GSW181A	13/16	29/32	7/8	1 1/2	13/32	•	•	•
5/8	TW201	SW201	GTW201	GSW201	15/16	7/8	7/8	1 1/2	15/32	•	•	•
11/16	TW221	SW221	GTW221	GSW221	31/32	29/32	7/8	1 1/2	1/2	•	•	•
3/4	TW241	SW241	GTW241	GSW241	1 1/32	31/32	7/8	1 1/2	9/16	•	•	•
13/16	TW261	SW261	GTW261	GSW261	1 1/8	1 1/16	7/8	1 1/2	9/16	•	•	•
7/8	TW281	SW281	GTW281	GSW281	1 3/16	1 1/8	7/8	1 1/2	25/32	•	•	•
15/16	TW301	SW301	GTW301	GSW301	1 9/32	1 7/32	27/32	1 17/32	3/4	•	•	•
1	TW321	SW321	GTW321	GSW321	1 11/32	1 9/32	7/8	1 9/16	3/4	•	•	•
1 1/16	TW341	SW341	GTW341	GSW341	1 7/16	1 3/8	1 1/16	1 11/16	3/4	•	•	•
1 1/8	TW361	SW361	GTW361	GSW361	1 1/2	1 7/16	1 31/32	1 3/4	1 3/16	•	•	•
1 3/16	TW381	SW381	–	GSW381	1 5/8	1 9/16	1 1/8	1 3/4	3/4			
1 1/4	TW401	SW401	GTW401	GSW401	1 11/16	1 5/8	1 1/4	1 7/8	3/4		•	
1 5/16	TW421	SW421	–	GSW421	1 3/4	1 11/16	1 1/4	1 7/8	1			
1 3/8	TW441	SW441	–	GSW441	1 13/16	1 3/4	1 7/16	2 1/16	1			
1 7/16	TW461	SW461	–	–	1 15/16	1 7/8	1 5/8	2 1/4	1			
1 1/2	TW481	SW481	–	GSW481	2	1 15/16	1 5/8	2 1/4	1			

Sets shown include storage tray

⚠WARNING

- Do not use chrome or industrial finish hand tools with impact drivers
- Read safety precautions on pages W1 to W4

FLANK DRIVE® SOCKETS



TSM20

313TSMYA

Deep, mm

mm	6	12	A	B	C	D	E	Set Contains: 313TSMYA 6	310TSM 6	313SMYA 12
10	TSM10A	SM10A	15.0	23.2	66.7	82.6	7.9		•	
11	TSM11	SM11A	16.6	23.2	66.7	82.6	8.7			
12	TSM12A	SM12B	18.2	23.2	66.7	82.6	9.5	•	•	•
13	TSM13A	SM13A	19.0	23.2	66.7	82.6	10.3	•	•	•
14	TSM14A	SM14A	20.6	23.2	66.7	82.6	10.3	•	•	•
15	TSM15A	SM15A	22.2	22.2	66.7	82.6	10.3	•	•	•
16	TSM16	SM16	23.8	22.2	51.0	82.6	11.9	•	•	•
17	TSM17	SM17	24.6	23.2	51.0	82.6	12.7	•	•	•
18	TSM18	SM18	25.4	23.8	51.0	82.6	14.3	•	•	•
19	TSM19	SM19	26.3	24.6	52.5	82.6	14.2	•	•	•
20	TSM20	SM20	26.7	26.1	58.5	82.6	14.0	•	•	•
21	TSM21	SM21	28.3	27.5	58.5	82.6	14.0	•		•
22	TSM22	SM22	29.9	28.6	58.5	82.6	14.2	•		•
23	TSM23	SM23	31.2	29.9	58.0	82.6	14.5	•		•
24	TSM24	SM24	32.5	30.9	50.0	82.6	15.8	•		•
25	TSM25	SM25	33.3	31.7	50.0	82.6	15.8			
26	TSM26	SM26	34.9	33.3	50.0	82.6	15.8			
27	TSM27	SM27	36.2	34.9	50.0	82.6	17.5			
28	TSM28	SM28	37.8	36.5	50.0	82.6	17.5			
29	TSM29	SM29	39.3	38.0	64.3	82.6	17.8			
30	TSM30	SM30	41.0	39.6	64.0	82.6	18.5			
31	TSM31	SM31	42.5	41.2	64.0	82.6	19.1			
32	TSM32	SM32	42.5	41.2	63.8	82.6	19.8			

Sets shown include storage tray

S241

GS201

313TSYA

Deep, inches

	6	12	6	12	A	B	C	D	E	Set Contains: 313TSYA 6	313GTSYA 6	313SYA 12
3/8	TS121A	S121A	GTS121A	–	19/32	29/32	2 5/8	3 1/4	5/16	•	•	•
7/16	TS141A	S141A	GTS141A	–	3/4	29/32	2 5/8	3 1/4	11/32	•	•	•
1/2	TS161A	S161A	GTS161A	GS161A	3/4	29/32	2 5/8	3 1/4	13/32	•	•	•
9/16	TS181A	S181A	GTS181A	GS181A	13/16	29/32	2 5/8	3 1/4	13/32	•	•	•
5/8	TS201	S201	GTS201	GS201	15/16	7/8	1 31/32	3 1/4	15/32	•	•	•
11/16	TS221	S221	GTS221	GS221	31/32	29/32	1 31/32	3 1/4	1/2	•	•	•
3/4	TS241	S241	GTS241	GS241	1 1/32	31/32	2 5/8	3 1/4	9/16	•	•	•
25/32	–	S251	–	–	1 1/16	1 1/32	2 1/8	3 1/4	5/8			
13/16	TS261	S261	GTS261	GS261	1 1/8	1 1/16	2 5/8	3 1/4	9/16	•	•	•
7/8	TS281	S281	GTS281	GS281	1 3/16	1 1/8	2 5/8	3 1/4	9/16	•	•	•
15/16	TS301	S301	GTS301	GS301	1 9/32	1 7/32	1 31/32	3 1/4	3/4	•	•	•
1	TS321	S321	GTS321	GS321	1 11/32	1 9/32	1 31/32	3 1/4	3/4	•	•	•
1 1/16	TS341	S341	GTS341	GS341	1 7/16	1 3/8	1 31/32	3 1/4	3/4	•	•	•
1 1/8	TS361	S361	GTS361	GS361	1 1/2	1 7/16	1 31/32	3 1/4	1 3/16	•	•	•
1 3/16	TS381	S381	GTS381	GS381	1 5/8	1 9/16	2 5/8	3 1/4	1 3/16			
1 1/4	TS401	S401	GTS401	GS401	1 11/16	1 5/8	2 5/8	3 1/4	1			
1 5/16	TS421	S421	–	–	1 3/4	1 11/16	2 9/16	3 1/4	1			
1 3/8	TS441	S441	–	–	1 13/16	1 3/4	2 9/16	3 1/4	1			
1 7/16	TS461	S461	–	–	1 15/16	1 7/8	2 5/8	3 1/4	1			
1 1/2	TS481	S481	–	–	2	1 15/16	2 5/8	3 1/4	1 1/16			

ASME®/ANSI® B107.1

Sets shown include storage tray

Semi Deep, inches

	12	A	B	C	D	E
3/8	SDH121	19/32	7/8	13/16	1 1/2	9/32
7/16	SDH141	11/16	29/32	13/16	1 1/2	11/32
1/2	SDH161	3/4	29/32	13/16	1 1/2	3/8
9/16	SDH181	27/32	29/32	13/16	1 1/2	13/32
5/8	SDH201	29/32	7/8	13/16	1 1/2	15/32
11/16	SDH221	31/32	15/16	1 1/16	1 3/4	1/2
3/4	SDH241	1 1/16	1 1/32	1 1/16	1 3/4	19/32
13/16	SDH261	1 1/8	1 3/32	1 1/16	1 3/4	21/32
7/8	SDH281	1 3/16	1 5/32	1 1/8	1 3/4	23/32
15/16	SDH301	1 9/32	1 1/8	1 5/32	1 13/16	23/32
1	SDH321	1 11/32	1 5/16	1 7/32	1 7/8	3/4
1 1/16	SDH341	1 7/16	1 13/32	1 7/32	1 15/16	3/4
1 1/8	SDH361	1 1/2	1 15/32	1 1/4	1 31/32	25/32
1 3/16	SDH381	1 9/16	1 17/32	1 5/16	2	25/32
1 1/4	SDH401	1 9/16	1 17/32	1 9/32	2 1/32	13/16
1 5/16	SDH421	1 21/32	1 5/8	1 5/16	2 1/32	27/32



SDH201

320TSWMA

320TSWMA Metric 6-Point Shallow/Deep Set
Includes TWM10A–TWM19 shallow sockets and TSM10A–TSM20 deep sockets (20pc) (10 mm–20 mm).

Universal, inches

	6	A	B	D	E
9/16	SU18	27/32	15/16	2 7/16	11/32
5/8	SU20	15/16	15/16	2 15/32	3/8
11/16	SU22	1 1/16	1 1/16	2 9/16	7/16
13/16	SU26	1 3/16	1 1/8	2 15/16	9/16
3/4	SU24	1 1/8	1 1/8	2 7/8	1/2
7/8	SU28	1 1/4	1 1/8	2 15/16	9/16
15/16	SU30	1 5/16	1 1/8	3	9/16



SU24

ASME®/ANSI® B107.10M

TORX/Shallow

#	Stock No.	A	B	D
E14	SLE140	21/32	7/8	1 1/2
E16	SLE160A	23/32	27/32	1 1/2
E18	SLE180A	27/32	7/8	1 1/2
E20	SLE200A	15/16	7/8	1 1/2
E24	SLE240	1 1/16	1	1 1/2



213AFLEY

213AFLEY Combination Drive Shallow *TORX* Set
Includes 1/4" drive TLE40A–LE100A, 3/8" drive FLE110A–FLE140A and 1/2" drive SLE160A–SLE240 (13pc) (E4–E24).

TORX Plus® with Countersink

- SLEPL series of *TORX Plus* sockets with shallow countersink are designed for use on external *TORX Plus* low-profile head fasteners so the user can fully engage the fastener head
- For removal and installation of low profile drive plate and flywheel bolts on QR25 Nissan® motors with automatic transmissions
- It is similar to the J-45816 *Nissan* specialty tool
- For flywheel bolts on QR25 *Nissan* motors with manual transmissions, use the 3/8" drive FTX50TPE male T50 *TORX Plus* Socket

SLEPL200

GSLEPL200

#	Stock No.	Industrial Stock No.	A	B	C
20EP	SLEPL200	GSLEPL200	15/16	11/16	1 1/2



⚠WARNING

- Do not use chrome or industrial finish hand tools with impact drivers
- Read safety precautions on pages W1 to W4

SPLINE SOCKETS

Snap-on® spline wrenching tools have been developed to service high tensile strength spline nuts and bolts widely used on both military and commercial aircraft. Precise, radial spline teeth engage the fastener teeth over a wider area to minimize stress, and allow application of high torque to reduce risk of damage to the fastener or to the tool.

Chrome tools comply with Military Spec. MS-33787 and MIL-W-8982. The unique spline wrenching configuration can also be used on ordinary six- and 12-point fasteners with an advantage similar to the *Snap-on* Flank Drive® wrenching system.

SES181



Shallow, inches

		Stock No.	A	B	C	D	E
#16	1/2	SES161	23/32	55/64	5/8	1 19/64	29/64
#18	9/16	SES181	53/64	55/64	5/8	1 19/64	15/32
#20	5/8	SES201	57/64	57/64	55/64	1 35/64	35/64
#22	11/16	SES221	31/32	31/32	27/32	1 35/64	37/64
#24	3/4	SES241	1 3/64	31/32	53/64	1 35/64	37/64
#26	13/16	SES261	1 1/8	1 1/8	13/16	1 35/64	37/64
#28	7/8	SES281	1 3/16	1 1/8	51/64	1 35/64	37/64
#30	15/16	SES301	1 17/64	1 17/64	49/64	1 35/64	37/64

SPECIAL APPLICATION SOCKETS

SW420



Double Square, inches

	Stock No.	A	B	C	D	E
3/8	SW412	23/32	7/8	7/8	1 1/2	5/16
7/16	SW414	51/64	7/8	7/8	1 1/2	3/8
1/2	SW416	29/32	7/8	7/8	1 1/2	13/32
9/16	SW418	31/32	29/32	7/8	1 1/2	7/16
5/8	SW420	1 1/16	1	7/8	1 1/2	1/2
11/16	SW422	1 3/16	1 1/8	7/8	1 1/2	1/2
3/4	SW424	1 9/32	1 3/16	7/8	1 1/2	9/16
13/16	SW426	1 7/16	1 3/8	1	1 5/8	5/8
7/8	SW428	1 1/2	1 7/16	1 1/8	1 3/4	5/8
15/16	SW430	1 5/8	1 9/16	1 1/8	1 13/16	11/16
1	SW432	1 11/16	1 5/8	1 1/4	1 7/8	11/16

ASME®/ANSI® B107.1

WH290

Weatherhead®, inches

	Stock No.	A	B
7/8	WH280	1 3/8	1 13/16
29/32	WH290	1 7/16	1 13/16
15/16	WH300	1 1/2	1 13/16

A26A



Drag Link

Stock No.	A	B	C
A26A	3/4	.109	1 11/16
A17A	15/16	.150	1 11/16
A15A	1 3/16	.150	1 11/16

PPM516A



Pipe Plug, inches

Stock No.	A	B	C
PPM516A	1/2	15/16	1 7/16

B2191



Flank Drive Pentagon

Stock No.	A	B	C
B2191	1 1/8	1/2	1 1/16

B2191 Pentagon Socket
Services recessed five-point nuts found on tamper-resistant Buffalo covers used by gas, electric and water companies to protect shutoff gates.

TORQUE ADAPTORS

Standard, inches

- Manufactured from special alloy steel
- Precision forged and heat treated for optimum strength and durability
- Double hex (12-point) configuration allows socket to engage single hex fastener every 30° rather than every 60°, allowing for better access in restricted areas
- Design features radius edges which will resist damage/nicks
- Center-to-center length on adaptor for easy torque calculations
- Larger sizes feature thicker construction for strength

SRDH341



Working Torque, in-lb		12	A	B	C	D	E
4,312	1	SRDH321	1.458	1.040	19/32	19/32	3
3,564	1 1/16	SRDH341	1.563	1.032	19/32	19/32	2
5,192	1 1/8	SRDH361	1.641	1.040	19/32	19/32	3
5,600	1 1/4	SRDH401	1.823	1.040	19/32	19/32	3
5,600	1 3/8	SRDH441	2.00	1.040	19/32	19/32	3

SPLINE TORQUE ADAPTORS



Snap-on® spline wrenching tools have been developed to service high tensile strength spline nuts and bolts widely used on both military and commercial aircraft. Precise, radial spline teeth engage the fastener teeth over a wider area to minimize stress, and allow application of high torque to reduce risk of damage to the fastener or to the tool. Chrome tools comply with Military Spec. MS-33787 and MIL-W-89823. The unique spline wrenching configuration can also be used on ordinary six- and 12-point fasteners with an advantage similar to the *Snap-on* Flank Drive® wrenching system.

Spline, inches

#		Stock No.	Working Torque, in-lb	A	B-B1	C-C1	SRES306
#18	9/16	SRES18	2,275	3	.818–1.04	13/32–1/2	•
#20	5/8	SRES20	2,450	3	.900–1.04	1/2–1/2	•
#22	11/16	SRES22	2,975	3	.989–1.04	1/2–1/2	•
#24	3/4	SRES24	3,500	3	1.08–1.04	1/2–1/2	•
#26	13/16	SRES26	4,410	3	1.16–1.04	1/2–1/2	•
#28	7/8	SRES28	4,900	3	1.26–1.04	1/2–1/2	•
#30	15/16	SRES30A	6,000	3	1.26–1.04	37/64–37/64	

SRES306

TORX® BIT SOCKETS

TORX Plus® fasteners may be found in almost all vehicles from the 1999 model year to present. Common applications include GM® transmissions bell housing bolts and Ford® seat belt anchors. Use of a standard *TORX* driver on *TORX Plus* fasteners may result in a rounded out fastener head or damaged driver.

STX70E

STXL55E

K1820A

STX60TPE

✱ *TORX*/Standard

#	Stock No.	A	B
T55	STX55E	2 9/16	FTX55E2
T60	STX60E	3 11/32	STX60E2
T70	STX70E	3 1/2	STX70E2

✱ *TORX*/Long

	Stock No.	A	B
T50	STXL50E	4 5/8	STXL50E2
T55	STXL55E	4 5/8	STXL55E2
T60	STXL60E	4 5/8	STXL60E2
T70	K1820A	5 3/8	K1820A2

✱ *TORX Plus*

#	Stock No.	A	B
45IP	STX45TPE	2 9/16	FTX45TPE2
45IP	STX50TPE	2 43/64	STX50TPE2
55IP	STX55TPE	2 3/4	FTX55TPE2
60IP	STX60TPE	3 9/32	STX60TPE2

⚠WARNING

- Do not use chrome or industrial finish hand tools with impact drivers
- Read safety precautions on pages W1 to W4

METRIC HEX BIT SOCKETS

307ESAMY



Hex/Standard, mm

mm		A	B	Set Contains: 307ESAMY
6	SAM6E	60.5	FAM6E2	•
8	SAM8E	62.0	FAM8E2	•
10	SAM10E	62.8	SAM10E2	•
12	SAM12E	81.0	SAM12E2	•
14	SAM14E	81.0	SAM14E2	•
16	SAM16E	95.2	SAM16E2	
17	SAM17E	93.7	SAM17E2	•
19	SAM19E	103.1	SAM19E2	•

Set includes magnetic storage tray

SAM12LE

Hex/Long, mm

mm		A	B
10	SAM10LE	152.4	SAM10LE2
12	SAM12LE	98.0	SAM12LE2

SAM12LE Applications: Essential for removal or installation of bolt found on the lower forks of 2006 and newer Harley-Davidson® Dyna series. Used when servicing the internal parts of the fork.

SABLM12E



Ball Hex/Long, mm

mm		A	B
12	SABLM12E	137.1	SABLM12E2

SADM10E

Double Hex, mm

Double Hex socket drivers and Triple Square socket drivers cannot be interchanged between applications. Triple square socket drivers have 90° corners. Double hex socket drivers have 120° corners. Using a Triple Square tool in a Double Hex application will strip the bolt head. In general, Triple Square tools are used on European vehicles and Double Hex tools are used on Asian vehicles.



mm		A	B
10	SADM10E	100.0	SADM10E2

SADM10E Applications: Removal/installation of head bolts on Toyota® Highlander®, 4Runner®, Camry®, Matrix®, Corolla® and Lexus® IS300, GS300, SC300 vehicles.

HEX BIT SOCKETS

307ESAY



GSA10E

Hex/Standard, inches

			A	B	Set Contains: 307ESAY
5/16	SA10E	GSA10E	2 3/8	FA10E2	•
3/8	SA12E	GSA12E	2 1/2	SA12E2	•
7/16	SA14E	GSA14E	2 7/8	SA14E2	•
1/2	SA16E	GSA16E	3 1/16	SA16E2	•
9/16	SA18E	GSA18E	3 3/16	SA18E2	•
5/8	SA20E	GSA20E	3 11/32	LAW120E2	•
3/4	SA24E	GSA24E	4 1/16	LAW124E2	•



Double Hex socket drivers and Triple Square socket drivers cannot be interchanged between applications. Triple square socket drivers have 90° corners. Double hex socket drivers have 120° corners. Using a Triple Square tool in a Double Hex application will strip the bolt head. In general, Triple Square tools are used on European vehicles and Double Hex tools are used on Asian vehicles.

TSS7KIT

STSM10LE

Triple Square, mm

mm		Stock No.	A	B	Set Contains: TSS7KIT
Standard Length	10	STSM10E	88.9	STSM10E2	•
	12	STSM12E	109.5	STSM12E2	•
	14	STSM14E	108.0	STSM14E2	•
	16	STSM16E*	108.0	STSM16E2	•
	18	STSM18E	108.0	STSM18E2	•
Long	10	STSM10LE	156.3	STSM10LE2	
	12	STSM12LE	147.6	STSM12LE2	

*Tamper resistant

Set shown includes storage tray

Applications:

STSM12E Metric Triple Square Driver
(12 mm, 1/2" drive) Remove and install cylinder head bolts on Mercedes®, rear toe adjustment on 1999 and newer Audi® A6®, and axle shaft bolts on new VW® vehicles.

STSM14E Metric Triple Square Driver
Applications include 2003 and later *VW* Touareg front axle bolts, 2003 and later Porsche® Cayenne® front axle bolts, various *Audi*/*VW* axle bolts plus *Audi* TT differential mount bolts and transmission drain plugs.

STSM18E Metric Triple Square Driver
Applications include removing and installing rear axle bolts of 2006 *VW* Jetta® and Golf® vehicles.

STSM16E Metric Triple Square Driver
Applications include *Audi* TT Clutch and Belly Pan, various *VW*/*Audi* transmission drain plugs (tamper resistant), 2003 and later *VW* Touareg® front and rear brake caliper bolts, 2003 and later *Porsche Cayenne* brake caliper bolts, plus Detroit Diesel® flywheel bolts and front crank pulley on 900 and 4000 engines and head bolts on 900 engines.

STSM10LE Metric Triple Square Driver Applications
- *Audi* TT Axle Bolts
- Use on head bolts of these *Audi* engines, 2004 to present:

–V6 2.8L (two valves per cylinder)
–V6 2.7L (five valves per cylinder)
– V8 4.2L
–1.8L Turbo

305STSMSE

Triple Square/Stubby, mm

mm	Stock No.	A	B	Set Contains: 305STSMSE
10	STSM10SE	59.4	STSM10SE2	•
12	STSM12SE	59.4	STSM12SE2	•
14	STSM14SE	63.2	STSM14SE2	•
16	STSM16SE	68.1	STSM16SE2	•
18	STSM18SE	69.8	STSM18SE2	•

STSM10SE Used for cylinder head bolts, drive shaft bolts and various other applications on *VW*, *Audi* and *Mercedes* vehicles.

STSM12SE Access exhaust manifold bolts on DD15 and *Mercedes* 900/4000 engines. Also for the back of the turbo and some oil pans. Head bolts and axle shaft bolts on *VW*, *Audi* and *Mercedes* vehicles.

STSM14SE Brake caliper bolts on *VW*, *Jetta*, Rabbit®, Passat®, EOS® and Tiquan. There is limited room due to the control arm in the way when backing out the fastener.

STSM16SE *VW* and *Audi* transmission and differential plug. *Porsche Cayenne* brake caliper bolts.

STSM18SE Rear axle bolts on *Volkswagen Jetta* and *Golf* vehicles.

⚠WARNING

- Do not use chrome or industrial finish hand tools with impact drivers
- Read safety precautions on pages W1 to W4

SPECIAL APPLICATION BIT SOCKETS

SPDL10E



Polydrive Head Bolt, mm

mm	Stock No.	Description	A	B
10	**SPDL10E**	#10 Polydrive Head Bolt Socket Driver	159	**SPDL10E2**

SPDL10E Bit Socket
Use to remove and install #10 Polydrive cylinder head bolts on 1998 and later VW®/Audi® vehicles with five-valve motors.

FLAT TIP AND PHILLIPS® TIP BIT SOCKETS

SW32E



— Flat Tip / Standard

	Stock No.	A	B
7/16 x .050	**SW28E**	3 1/16	**SW28E2A**
1/2 x .075	**SW32E**	3 1/16	**SW32E2A**
5/8 x .093	**SW40E**	3 1/4	**SW40E2A**

SP32E



✚ *Phillips*/Standard

	Stock No.	A	B
#3	**SP32E**	2 3/16	**SP32E2**
#4	**SP42E**	2 5/16	**SP42E2**

IMPACT DRIVERS AND SETS

PIT3120EB

PIT160

Impact Driver Set

Includes:

Stock No.	Description
PIT160	Impact Driver
A26A	Drag Link Socket
SA10E	5/16" Hex Head Driver
SA12E	1/2" Drive, 3/8" Hex Driver
SA14E	1/2" Drive, 7/16" Hex Driver
SA16E	1/2" Hex Head Driver
SA18E	9/16" Hex Head Driver
SA20E	5/8" Hex Head Driver
SP32E	*PHILLIPS* Driver
SP42E	*PHILLIPS* Driver
SW28E	7/16" x .05" Socket Driver
SW32E	1/2" x .075" Socket Driver
KRA142B	Metal Box

PIT160 This 1/2" drive unit delivers cam action impact when struck with a hammer.

PIT3120EB Impact Driver Set
PIT160 impact driver plus sockets and socket drivers (12pc) in KRA142B metal box.

Locking Extensions

- Ideal for use on transmission bellhousing bolts, transaxle and suspension service
- Pull back collar for fast and easy attachment and removal of sockets
- Knurled release collar also provides for easy one-hand operation
- Single body construction for maximum strength and locking mechanism specifically for impact use
- Female drive end recessed to accommodate newer style impact guns



Stock No.	A	B	Set Contains: 303IMXL	303AIMXL
IMXL32	5/8	3 1/2	•	
IMXL52	5/8	5	•	
IMXL102	5/8	10	•	
IMXL182	5/8	18		•
IMXL242	5/8	24		•
IMXL312	5/8	31		•

Sets include storage tray

303IMXL



Impact Extensions–Snap Ring Retention

Stock No.	A	B
IMX32B	5/8	3
IMX52	21/32	5 3/32
IMX112	21/32	11 1/4

304IMX Impact Extension Set

- Includes IMX32B, IMX52 and IMX112 Extensions (3", 5 3/32", 11 1/4") plus IP80D Universal Joint (four pieces) in storage tray

304IMX



Locking Adaptors

- Quick release locking sleeve at 3/8" drive end provides a secure connection plus easy socket removal

Stock No.	A	B	C	D
IMSFXL18	3/8	1/2	21/32	18
IMSFXL24	3/8	1/2	21/32	24
IMSFXL33	3/8	1/2	21/32	33

IMSFXL18



Adaptor

Stock No.	A	B	C	D
IMXA42	3/8	1/2	1/2	4

IMXA42



Universal Joints (Impact)

Stock No.	Socket Attachment	A	B
IP80D	Pin Type	1 1/4	2 3/4
IP80O	Ball Type	1 1/4	2 3/4

202IP Combination Universal Joint Set Set includes storage tray

Includes IPF800B (3/8" drive) and IP80D (1/2" drive) Impact Swivel Universal Joints.

202IP

⚠WARNING

- Do not use chrome plated tools with impact drivers
- Read safety precautions on pages W1 to W4

FLANK DRIVE® IMPACT SOCKETS



IMDM150A

315IMMYA

Shallow, mm

mm	6	12	A	B	C	D	E	Set Contains: 315IMMYA 6	312IMM 6	310IMMYA 6	315IMDMYA 12
10	IMM100A	IMDM100A	15.0	22.6	22.2	38.1	7.9	•		•	•
11	IMM110A	IMDM110A	18.2	22.6	22.2	38.1	8.7	•		•	•
12	IMM120A	IMDM120A	19.0	24.3	22.2	38.1	9.5	•		•	•
13	IMM130A	IMDM130A	20.6	24.3	22.2	38.1	10.3	•		•	•
14	IMM140A	IMDM140A	22.2	24.3	22.2	38.1	10.3	•		•	•
15	IMM150A	IMDM150A	23.8	26.4	22.2	38.1	10.3	•	•	•	•
16	IMM160A	IMDM160A	24.6	26.4	22.2	38.1	11.9	•	•	•	•
17	IMM170A	IMDM170A	25.4	26.7	22.2	38.1	12.7	•	•	•	•
18	IMM180	IMDM180	26.7	26.7	19.1	38.1	12.7	•	•	•	•
19	IMM190	IMDM190	28.3	28.3	21.3	38.1	12.7	•	•	•	•
20	IMM200	IMDM200	29.9	29.9	21.1	38.1	14.2	•	•		•
21	IMM210	IMDM210	31.5	31.5	21.0	38.1	14.2	•	•		•
22	IMM220	IMDM220	33.3	33.3	21.4	38.1	15.9	•	•		•
23	IMM230	IMDM230	34.1	34.1	27.8	44.5	15.9	•	•		•
24	IMM240	IMDM240	34.9	34.9	27.8	44.5	15.9	•	•		•
25	IMM250	–	29.8	29.8	27.0	44.5	15.9		•		
26	IMM260	–	38.1	38.1	33.3	50.8	15.9				
27	IMM270	IMDM270	39.4	39.4	27.1	50.8	20.3		•		
29	IMM290	–	41.1	41.1	33.3	50.8	21.1				
30	IMM300	–	42.7	42.7	32.1	50.8	21.6				
32	IMM320	IMDM320	45.8 (45.7)	45.8 (45.7)	32.1 (36.8)	50.8	22.4 (20.6)				
34	IMM340	–	47.6	42.9	40.5	52.4	22.4				
36	IMM360	IMDM360	50.5 (50.8)	45.8 (46.0)	40.5 (41.3)	57.2	22.4 (22.2)				
39	–	IMDM390	53.8	39.6	36.8	50.8	22.3				
41	–	IMDM410	55.6	40.5	31.8	51.6	22.2				
46	IMM460	–	64.8	47.6	50.3	69.9	29.7				

Dimensions in () apply to 12-point sockets only.

Sets include storage tray

IMDM270 Applications: Use for servicing Inner Rack and Pinion Nuts on BMW® X5® and X6® vehicles

IMDM320 Applications: Service axle nuts on Mercedes-Benz® W140 chassis 1992–1999 SC and SL Class, Porsche® Boxster®, Cayenne® and 944 plus *BMW* X3®, *X5* and *X6* Series 2007 vehicles and later. Other uses include drive shaft nuts on VW® Touareg® vehicles 2003 and later.

IMDM360 Applications: Use to remove pinion nuts on 2003 GM® and 2004 Dodge® trucks with 11.5 AAM axles. Other used include Duramax® diesel front crankshaft bolts and late model *BMW* axle shafts.

IMDM390 Applications: Use on front axle hub of 2007 Toyota® Tundra.

IMDM410 Applications: For removing and installing the lower ball joint on 2013 to current *BMW* 5 and 7 series vehicles.



311IMYA

IMD200

Shallow, inches

Set Contains:								311IMYA	313IMD	307IMDYA
11	6	12	A	B	C	D	E	6	12	12
3/8	IM120A	IMD120A	19/32	29/32	7/8	1 1/2	5/16	•	•	•
7/16	IM140A	IMD140A	23/32	29/32	7/8	1 1/2	11/32	•	•	•
1/2	IM160A	IMD160A	13/16	29/32	7/8	1 1/2	13/32	•	•	•
9/16	IM180A	IMD180A	7/8	29/32	7/8	1 1/2	13/32	•	•	•
5/8	IM200	IMD200	15/16	1	7/8	1 1/2	15/32	•	•	•
11/16	IM220	IMD220	1 1/16	1 1/16	3/4	1 1/2	1/2	•	•	•
3/4	IM240	IMD240	1 1/8	1 1/8	3/4	1 1/2	1/2	•	•	•
13/16	IM260	IMD260	1 1/4	1 1/4	3/4	1 1/2	1/2	•	•	
7/8	IM280	IMD280	1 5/16	1 5/16	13/16	1 1/2	9/16	•	•	
15/16	IM300	IMD300	1 3/8	1 3/8	1 1/16	1 3/4	3/4	•	•	
1	IM320	IMD320	1 7/16	1 7/16	1 1/16	1 3/4	3/4	•	•	
1 1/16	IM340	–	1 9/16	1 9/16	1	2	13/16			
1 1/8	IM360	IMD360	1 5/8	1 5/8	1	2	13/16		•	
1 3/16	IM380	–	1 11/16	1 1/2	1 3/32	2	13/16			
1 1/4	IM400	IMD400	1 3/4	1 1/2	1 5/32	2	13/16		•	
1 5/16	IM420H	–	1 7/8	1 1/2	1 3/8	2	7/8			
1 3/8	IM440	–	1 15/16	1 1/2	1 3/8	2	7/8			
1 7/16	IM460	–	2	1 1/2	1 3/8	2	15/16			
1 1/2	IM480	–	2 1/8	1 9/16	1 3/8	2	15/16			
1 9/16	IM500	–	2 1/4	1 5/8	1 11/16	2 5/16	15/16			

Sets shown include storage tray

312IMMS

IMMS240

Semi Deep, mm

Set Contains:						312IMMS
mm	6	A	B	D	E	6
15	IMMS150	23.7	23.7	55.9	10.7	•
16	IMMS160	24.4	24.4	55.9	11.9	•
17	IMMS170	25.3	25.3	55.9	11.2	•
18	IMMS180	26.8	26.8	55.9	12.7	•
19	IMMS190	28.5	28.5	55.9	14.2	•
20	IMMS200	30.0	30.0	55.9	14.2	•
21	IMMS210	31.6	31.6	55.9	14.2	•
22	IMMS220	33.2	33.2	60.4	14.2	•
23	IMMS230	34.0	34.0	60.4	16.2	•
24	IMMS240	34.9	34.9	60.4	15.5	•
25	IMMS250	36.3	36.3	60.4	16.2	•
27	IMMS270	39.6	39.6	60.4	20.3	•

Set shown includes storage tray

WARNING • Read safety precautions on pages W1 to W4

FLANK DRIVE® IMPACT SOCKETS

315SIMMYA



Deep, mm

Set Contains:								305SIMMY	310SIMMYA	310SIMMADDON	312SIMM	315SIMMYA	325SIMM	312SIMDM
mm	6	12	A	B	C	D	E	6	6	6	6	6	6	12
10	SIMM100A	SIMDM100	15.0	23.2	66.7	82.6	7.9		•			•	•	
11	SIMM110A	SIMDM110	18.2	23.2	66.7	82.6	8.7		•			•	•	
12	SIMM120A	SIMDM120	19.0	23.2	66.7	82.6	9.5		•			•	•	
13	SIMM130A	SIMDM130	20.6	23.2	66.7	82.6	10.3		•			•	•	
14	SIMM140A	SIMDM140	22.2	23.2	66.7	82.6	10.3		•			•	•	
15	SIMM150A	SIMDM150	23.8	23.8	50.0	82.6	10.3		•		•	•	•	•
16	SIMM160A	SIMDM160	24.6	24.6	50.0	82.6	11.9		•		•	•	•	•
17	SIMM170	SIMDM170	25.1	25.1	57.9	82.6	11.2		•		•	•	•	•
18	SIMM180	SIMDM180	26.7	26.7	61.0	82.6	12.7		•		•	•	•	•
19	SIMM190	SIMDM190	28.3	28.3	61.0	82.6	14.2		•		•	•	•	•
20	SIMM200	SIMDM200	29.9	29.9	61.0	82.6	14.2				•	•	•	•
21	SIMM210	SIMDM210	31.5	31.5	61.0	82.6	14.2				•	•	•	•
22	SIMM220	SIMDM220	33.1	33.1	71.6	88.9	15.7				•	•	•	•
23	SIMM230	SIMDM230	33.1	33.1	64.3	88.9	15.9				•	•	•	•
24	SIMM240	SIMDM240	34.9	34.9	63.5	88.9	15.9				•	•	•	•
25	SIMM250	SIMDM250	36.3	36.3	63.5	88.9	15.9			•	•		•	•
26	SIMM260	–	37.9	37.9	71.0	88.9	19.8			•			•	
27	SIMM270	SIMDM270	39.4	39.4	71.0	88.9	20.3			•	•		•	•
28	SIMM280A	–	41.0	41.0	71.0	88.9	20.8							
29	SIMM290	SIMDM290	41.3	41.3	71.6	88.9	21.3	•		•			•	
30	SIMM300	SIMDM300	42.9	42.9	71.6	88.9	21.6	•		•			•	
32	SIMM320	SIMDM320	45.8	45.8	71.6	88.9	22.4			•			•	
33	SIMM330	SIMDM330	46.0	46.0	72.8	88.9	22.4			•			•	
34	SIMM340	SIMDM340	49.3	49.3	72.8	88.9	22.6	•		•			•	
35	SIMM350	SIMDM350	50.8	50.8	72.8	88.9	22.9	•		•			•	
36	SIMM360	SIMDM360	50.8	50.8	72.8	88.9	22.9	•		•			•	

Sets shown include storage tray

313SIMA

Deep, inches

Set Contains:								309SIMYA	313SIMA	320SIM*	313SIMD
11	6	12	A	B	C	D	E	6	6	6	12
3/8	SIM120A	–	19/32	29/32	2 5/8	3 1/4	5/16			•	
7/16	SIM140A	–	23/32	29/32	2 5/8	3 1/4	11/32			•	
1/2	SIM160A	SIMD160A	13/16	29/32	2 5/8	3 1/4	3/8	•	•	•	•
9/16	SIM180A	SIMD180A	7/8	29/32	2 5/8	3 1/4	13/32	•	•	•	•
5/8	SIM200	SIMD200A	31/32	29/32	2 5/8	3 1/4	15/32	•	•	•	•
11/16	SIM220	SIMD220A	1 1/16	1 1/16	2 5/8	3 1/4	1/2	•	•	•	•
3/4	SIM240	SIMD240A	1 1/8	1 1/8	2 5/8	3 1/4	9/16	•	•	•	•
13/16	SIM260	SIMD260A	1 1/4	1 1/4	2 5/8	3 1/4	19/32	•	•	•	•
7/8	SIM280	SIMD280A	1 5/16	1 5/16	2 3/32	3 1/2	9/16	•	•	•	•
15/16	SIM300	SIMD300A	1 3/8	1 3/8	2 3/32	3 1/2	3/4	•	•	•	•
1	SIM320	SIMD320A	1 7/16	1 7/16	2 7/8	3 1/2	3/4	•	•	•	•
1 1/16	SIM340	SIMD340A	1 9/16	1 9/16	2 11/16	3 1/2	25/32		•	•	•
1 1/8	SIM360	SIMD360A	1 5/8	1 5/8	2 11/16	3 1/2	25/32		•	•	•
1 3/16	SIM380	SIMD380A	1 11/16	1 1/2	2 11/16	3 1/2	25/32		•	•	•
1 1/4	SIM400	SIMD400A	1 3/4	1 1/2	2 11/16	3 1/2	1		•	•	•
1 5/16	SIM420H	–	1 7/8	1 1/2	2 11/16	3 1/2	15/16			•	
1 3/8	SIM440	–	2	1 1/2	2 11/16	3 1/2	15/16			•	
1 7/16	SIM460	–	2	1 1/2	2 21/32	3 1/2	15/16			•	
1 1/2	SIM480	–	2 1/8	1 9/16	2 5/8	3 1/2	15/16			•	
1 9/16	SIM500	–	2 1/4	1 5/8	2 5/8	3 1/2	15/16			•	
1 5/8	SIM520	–	2 3/8	1 3/4	2 7/8	3 1/2	15/16				

Sets shown include storage tray unless noted
*Does not include storage tray



311IMFSY

Shallow Thin Wall, inches

Set Contains: 311IMFSY

	6	A	B	C	D	E	6
3/8	IMFS120	19/32	7/8	3/8	1 1/2	7/32	•
7/16	IMFS140	11/16	7/8	9/16	1 1/2	11/32	•
1/2	IMFS160	3/4	7/8	5/8	1 1/2	3/8	•
9/16	IMFS180	13/16	7/8	11/16	1 1/2	13/32	•
5/8	IMFS200	29/32	29/32	3/4	1 1/2	15/32	•
11/16	IMFS220	1	1	13/16	1 1/2	1/2	•
3/4	IMFS240	1 1/16	1 1/16	13/16	1 1/2	1/2	•
13/16	IMFS260	1 1/8	1 1/8	25/32	1 1/2	1/2	•
7/8	IMFS280	1 7/32	1 7/32	29/32	1 1/2	9/16	•
15/16	IMFS300	1 5/16	1 5/16	1 3/16	1 17/32	3/4	•
1	IMFS320	1 3/8	1 3/8	1 3/16	1 9/16	3/4	•
1 1/16	IMFS340	1 7/16	1 7/16	1 1/4	1 11/16	13/16	
1 1/8	IMFS360	1 1/2	1 1/2	1 1/4	1 3/4	13/16	
1 3/16	IMFS380	1 5/8	1 5/8	1 1/4	1 3/4	13/16	
1 1/4	IMFS400	1 11/16	1 11/16	1 1/4	1 7/8	13/16	
1 5/16	IMFS420	1 3/4	1 3/4	1 1/4	1 7/8	13/16	
1 3/8	IMFS440	1 13/16	1 13/16	1 1/4	2 1/16	13/16	
1 7/16	IMFS460	1 29/32	1 29/32	1 3/8	2 1/16	13/16	
1 1/2	IMFS480	2	2	1 3/8	2 1/16	13/16	

Set shown includes storage tray

SIMML180

Extra Deep, mm

mm	6	A	B	C	D	E
15	SIMML150	23.2	26.4	110.2	127.0	10.7
18	SIMML180	26.8	26.8	54.8	127.0	12.7
21	SIMML210	31.6	31.6	108.0	127.0	14.2

SIMML180 6-Point Metric Extra Deep Impact Socket

- Remove and install the fuel tank hold down strap on International® 4400 chassis. The fuel tank must be removed to replace the fuel sending unit
- 5" long to reach through the frame to access the fastener without the need of an extension



SIMM360TW

Deep Thin Wall, mm

mm	Stock No.	A	B	C	D	E
36	SIMM360TW	47.2	44.5	70.4	88.9	22.9

SIMM360TW Axle Nut Socket

- Thin wall design provides the extra room needed to remove and install the axle nut on a Chevrolet® Sonic vehicles

SIML200

Extra Deep, inches

- Use for removing or replacing fuel tank retaining strap nuts
- Also has applications on emergency brake adjustment nuts and stabilizer retainers

	6	A	B	C	D	E
1/2	SIML160*	25/32	15/16	4 1/4	5	3/8
9/16	SIML180	7/8	15/16	4 1/4	5	13/32
5/8	SIML200	31/32	1	4 1/4	5	15/32
11/16	SIML220	1 1/16	1 1/16	4 1/4	5	1/2
3/4	SIML240	1 1/8	1 1/8	4 1/4	5	9/16
13/16	SIML260	1 1/4	1 1/4	4 1/4	5	19/32
7/8	SIML280	1 5/16	1 5/16	4 1/4	5	21/32
15/16	SIML300	1 3/8	1 3/8	4 1/4	5	23/32
1	SIML320	1 7/16	1 7/16	4 3/8	5	3/4
1 1/16	SIML340	1 9/16	1 9/16	4 3/8	5	25/32
1 1/8	SIML360	1 5/8	1 5/8	4 3/8	5	25/32

*ASME®/ANSI® B107.2

SIMMF21A

Extra Deep/Thin Wall, mm

Sockets are 34% thinner than a standard thin wall socket. Use to access nut on long studs and other hard-to-reach areas. Ideal for wheel lugs.

mm	6	A	B	C	D	E
14	SIMMF14A	20.6	23.8	50.8	76.2	25.4
17	SIMMF17A	23.8	23.8	50.8	76.2	25.4
19	SIMMF19A	25.4	25.4	50.8	76.2	25.4
21	SIMMF21A	28.6	28.6	50.8	76.2	25.4
22	SIMMF22A	30.2	30.2	50.8	76.2	25.4

WARNING • Read safety precautions on pages W1 to W4

FLANK DRIVE® IMPACT SWIVEL SOCKETS

307IPLMY

IPDLM12

Shallow Swivel, mm

mm	6	12	A	B	D	E	307IPLMY 6	312IPLM 6
10	IPLM10C	–	15.6	23.8	73.7	9.7		•
11	IPLM11C	–	17.8	23.8	73.7	9.7		•
12	IPLM12C	IPDLM12	18.9	23.8	73.7	9.7		•
13	IPLM13C	IPDLM13A	19.7	23.8	73.7	8.6		•
14	IPLM14C	–	21.3	23.8	73.7	8.6	•	•
15	IPLM15C	–	22.6	23.8	73.7	8.6	•	•
16	IPLM16C	IPDLM16A	24.1	30.2	77.8	10.4		•
17	IPLM17C	IPDLM17A	25.6	30.2	77.7	10.4	•	•
18	IPLM18C	IPDLM18A	26.7	30.2	77.7	10.4	•	•
19	IPLM19C	–	28.3	30.2	77.7	11.2	•	•
21	IPLM21C	–	31.5	30.2	77.7	12.7	•	•
22	IPLM22C	–	33.1	30.2	77.8	14.2		
24	IPLM24C	–	34.8	30.2	81.0	15.0	•	•

Set Contains:

Sets shown include storage tray

307IPLY



Shallow Swivel, Inches

	6	12	A	B	D	E	307IPLY 6	312IPL 6
1/2	IPL16C	IPDL16	25/32	1 1/16	2 29/32	11/32		•
9/16	IPL18C	–	7/8	1 1/16	2 29/32	11/32	•	•
5/8	IPL20C	IPDL20	31/32	1 1/16	2 31/32	11/32	•	•
11/16	IPL22C	–	1 1/16	1 1/4	3 1/16	7/16	•	•
3/4	IPL24C	–	1 1/8	1 1/4	3 1/16	15/32	•	•
13/16	IPL26C	–	1 3/16	1 1/4	3 1/16	1/2		•
7/8	IPL28C	–	1 9/32	1 1/4	3 7/32	9/16	•	•
15/16	IPL30C	–	1 11/32	1 1/4	3 7/32	5/8	•	•
1	IPL32C	–	1 11/32	1 1/4	3 3/16	11/16		•
1 1/16	IPL34C	–	1 7/16	1 1/4	3 7/32	23/32		•
1 1/8	IPL36C	–	1 9/16	1 1/4	3 11/32	3/4	•	•
1 3/16	IPL38C	–	1 9/16	1 1/4	3 3/8	3/4		•
1 1/4	IPL40C	–	1 5/8	1 1/4	3 7/16	13/16		
1 5/16	IPL42C	–	1 3/4	1 1/4	3 7/16	7/8		

Set Contains:

Sets shown include storage tray

IPSM21

Semi Deep Swivel, mm

mm	6	A	B	C	D	E
15	IPSM15	23.0	25.1	—	86.4	12.4
18	IPSM18	26.5	31.5	—	89.1	12.7
21	IPSM21	30.0	31.5	33.8	89.2	12.7
22	IPSM22	32.4	31.5	—	89.1	12.7

IPSM21 Metric Semi Deep Impact Swivel Socket
Designed for GM® and Ford® upper control arm bolts. Welded pivot pin reinforces socket wall and allows full 30° of uninterrupted smooth action for efficient power transfer at any angle.

SIP18A

Deep Swivel, inches

	6	A	B	D	E
9/16	SIP18A	13/16	1 3/16	3 13/16	11/32
3/4	SIP24A	1 1/32	1 3/16	4 1/4	7/16

SPECIAL APPLICATION IMPACT SOCKETS

IMSLE240



TORX®, Impact

#	Stock No.	A	B	D
E18	IMSLE180	29/32	29/32	1 1/2
E20	IMSLE200	15/16	15/16	1 1/2
E24	IMSLE240	1 1/16	1 1/16	1 1/2

IMSLE240 *TORX* Impact Socket
- Front axle nut on M, C, E and S class Mercedes® vehicles

305TTWYA



Twist/Shallow, inches

Removes rounded/damaged fasteners

	Stock No.	A	B	C	D
3/4	TTWY241A	1 1/32	1	1	1 5/8
13/16	TTWY261A	1 1/8	1	1	1 5/8
7/8	TTWY281A	1 3/16	1 1/16	1	1 5/8
15/16	TTWY301A	1 1/4	1 3/16	1	1 5/8
1	TTWY321A	1 5/16	1 1/4	1	1 5/8

305TTWYA Shallow Twist Set
TTWY241A–TTWY321A (5pc) (3/4"–1").

SPS10

Shackle Pin

Designed with an oval configuration to service shackle pins on International Harvester® and Kenworth® semi trucks.

SPS10 41/64" x 1 3/32" x 1 3/4" long.

SPS11 21/32" x 1 17/32" x 1 3/4" long.



A172A

Drum Plug Socket

A172A One socket removes virtually all screw-in drum plugs or caps large or small. Spring loaded inner wrench handles smaller plugs and recesses automatically when removing large plugs. Use with a 1/2" drive ratchet or impact wrench.



DPSM16

Shallow 10 pt., mm

mm	10	A	B	D	E
16	DPSM16	24.6	24.6	38.1	11.9

DPSM16 Shallow Impact Socket

- The DPSM16 is for removing the rear lower control arm bolts on 2001 and newer Honda® Civic® and Acura® RSX vehicles
- Forged from tough alloy steel
- Heat treated to a lower hardness to add impact resistance and ductility

S6324

Crank Shaft Bolt Impact Socket, mm

S6324 Crank Shaft Bolt Socket

- For removing and installing crank shaft bolts on Audi® A4®, A6® and A8® vehicles
- Socket is 1/2" drive 24 mm and overall length is 2" which is critical to the crank shaft bolt application
- Manufactured from special alloy steel
- Precision forged and heat treated for optimum strength and durability
- Flank Drive® wrenching system grips fastener on the flanks/flats increasing torque by 15%–20% while preventing the fastener from rounding and increasing the life of the socket

PS2

Lock Button Retention Extensions

Stock No.	A	B
PS2	5/8	2
PS3	5/8	3 1/2
PS5	5/8	5
PS10	5/8	10



PA2A

Adaptors (Power)

Stock No.	Socket Attachment	A	B	C	D
PA2A	Pin Type	3/8	1/2	3/4	1 5/16
PA4E	Pin Type	1/2	3/8	15/16	1 13/16



A3011A

Hex Shank (Power)

Stock No.	Socket Attachment	A	B	C	D
A3011A	Pin Type	1/2	7/16	1 1/4	2 3/4

⚠WARNING

- Do not use chrome or industrial finish power tools with impact drivers
- Do not use industrial finish power tools with impact drivers
- Read safety precautions on pages W1 to W4

POWER SOCKETS

SPM19

P412

SIPR426

SIPRL436

MPK121A

Flank Drive® Deep, mm



mm	6	A	B	C	D	E
17	SPM17	24.6	24.6	66.6	82.6	12.7
19	SPM19	26.4	26.4	64.8	82.6	11.9
21	SPM21	28.3	28.3	64.8	82.6	12.3

Shallow Double Square, inches

	8	A	B	C	D	E
3/8	P412	13/32	7/8	7/8	1 1/2	5/16
7/16	P414	13/16	15/16	7/8	1 1/2	3/8
1/2	P416	29/32	1	7/8	1 1/2	5/16
9/16	P418	1	1 1/8	7/8	1 1/2	1/2
5/8	P420	1 3/32	1 3/16	7/8	1 1/2	1/2
11/16	P422	1 7/32	1 1/4	7/8	1 1/2	13/32
3/4	P424	1 5/16	1 3/8	7/8	1 1/2	9/16
13/16	P426	1 7/16	1 7/16	7/8	1 1/2	5/8
7/8	P428	1 1/2	1 1/2	1 1/32	1 3/4	5/8
1	P432	1 23/32	1 3/4	1 1/8	1 3/4	3/4

Deep Double Square, inches

	8	A	B	C	D	E
13/16	SIPR426	1 7/16	1 3/8	2 9/16	3 1/4	5/8
1	SIPR432	1 3/4	1 1/2	2 11/16	3 1/2	3/4
1 1/8	SIPR436	1 15/16	1 51/64	2 23/32	3 1/2	27/32

Extra Deep Double Square, inches

	8	A	B	C	D	E
1 1/8	SIPRL436	1 15/16	1 1/2	4 13/32	5	27/32

Flank Drive/Magnetic, inches

	6	A	B	D	E
3/8	MPK121A	19/32	7/8	1 1/2	1/8
7/16	MPK141A	11/16	7/8	1 1/2	5/32
1/2	MPK161A	25/32	15/16	1 1/2	5/32
9/16	MPK181A	7/8	15/16	1 1/2	5/32

POWER BIT SOCKETS

PFTX50E

TORX®/Power Drivers



#	Stock No.	A	B
T45	PSTX45E	2 7/16	FTX45E2
T50	PSTX50E	2 7/16	FTX50E2
T50	PSTX500E*	2 7/16	FTX500E2
T55	PSTX55E	2 7/16	FTX55E2

*GM® Style

Hex, inches (Power)

		A	B
5/16	PSA10E	2 7/16	FA10E2
3/8	PSA12E	2 9/16	SA12E2
7/16	PSA14E	2 7/8	SA14E2
1/2	PSA16E	3 1/16	SA16E2
9/16	PSA18E	3 1/8	SA18E2
5/8	PSA20E	3 7/16	LAW120E2
3/4	PSA24E	4 1/16	LAW124E2



PSA10E

SURFACE DRIVE SOCKETS

Surface Drive Shallow, mm

mm	6	A	B	C	D	E
15	DTM15A	22.3	22.9	21.3	38.1	10.7



DTM15A

Surface Drive Deep, mm

Surface drive sockets will engage with a fastener while rotating on a power nut runner.

mm	6	A	B	C	D	E
13	DTSM13A	19.3	21.8	65.8	82.6	10.2
15	DTSM15A	22.3	21.8	65.8	82.6	10.7

DTSM13A

Surface Drive Deep, inches

	6	A	B	C	D	E
1/2	DTS16A	3/4	29/32	2 19/32	3 1/4	13/32
9/16	DTS18A	13/16	29/32	2 19/32	3 1/4	13/32

DTS16A

Surface Drive (M-Series)

- Snap-on® M-Series sockets offer a precise fit, optimum hardness and durability, and ring-groove and pin hole for use on a variety of industrial fastening applications
- M-Series sockets also feature surface drive technology to ensure a long service life

mm	6	A	B	C	D	E
11	M3111	16.6	23.6	19.1	38.1	8.1
13	M3113	22.0	23.6	19.1	38.1	9.7
15	M3115	23.6	23.6	21.3	38.1	12.4
15	M3215	23.6	23.6	40.4	57.2	12.4
18	M3118	28.4	28.4	21.3	38.1	11.2

M3115

WARNING

- Do not use chrome or industrial finish hand tools with impact drivers
- Read safety precautions on pages W1 to W4

GENERAL SERVICE SETS

344AMB

344AMB Fractional Chrome General Service Set 44 pcs, Includes:

12-Point Shallow Sockets		12-Point Deep Sockets	
3/8	SW121A	1/2	S161A
7/16	SW141A	9/16	S181A
1/2	SW161A	5/8	S201
9/16	SW181A	11/16	S221
5/8	SW201	3/4	S241
11/16	SW221	13/16	S261
3/4	SW241	7/8	S281
13/16	SW261	15/16	S301
7/8	SW281	1	S321
15/16	SW301	1 1/16	S341
1	SW321	1 1/8	S361
1 1/16	SW341		
1 1/8	SW361		
1 3/16	SW381		
1 1/4	SW401		
1 5/16	SW421		

6-Point Universal Sockets Set	307SUY	9/16"–15/16" (7 pcs)
Also Includes:	LRS70A	1 19/32" Ratchet Spinner
	S4	18 7/8" Speeder
	S8	2 11/16" Universal Joint
	S12L	12" Sliding T-Handle
	S77A	Ratcheting Adaptor
	S80A	Sealed Ratchet
	SN18B	18" Breaker Bar
	SX2	2" Extension
	SXK5	5" Knurled Extension
	SXK11	11" Knurled Extension

360MB

360MB Fractional Chrome General Service Set in KRA21G Metal Box 59 pcs, Includes:

12-Point Shallow Sockets		6-Point Deep Sockets		12-Point Deep Sockets	
3/8	SW121A	1/2	TS161A	1/2	S161A
7/16	SW141A	9/16	TS181A	9/16	S181A
1/2	SW161A	5/8	TS201	5/8	S201
9/16	SW181A	11/16	TS221	11/16	S221
5/8	SW201	3/4	TS241	3/4	S241
11/16	SW221	13/16	TS261	13/16	S261
3/4	SW241	7/8	TS281	7/8	S281
13/16	SW261	15/16	TS301	15/16	S301
7/8	SW281	1	TS321	1	S321
15/16	SW301	1 1/16	TS341	1 1/16	S341
1	SW321	1 1/8	TS361		
1 1/16	SW341				
1 1/8	SW361				
1 3/16	SW381				
1 1/4	SW401				
1 5/16	SW421				

6-Point Universal Sockets Set	307SUY	9/16"–15/16" (7 pcs)
Also Includes:	S12L	12" Sliding T-Handle
	S77A	Ratcheting Adaptor
	SN18B	18" Breaker Bar
	SX2	2" Extension
	SXK3	3 1/2" Extension
	SXK5	5" Knurled Extension
	SXK11	11" Knurled Extension
	A80A	1/4"–1/2" Capacity Stud Remover
	LRS70A	1 19/32" Ratchet Spinner
	S80A	Sealed Ratchet
	S4	18 7/8" Speeder
	S8	2 11/16" Universal Joint

345MMB

345MMB Chrome Metric General Service Set 45 pcs, Includes:

mm	12 Point Socket Sets
(23pc) (10 mm–32 mm)	**323SWM** Metric 12-Point Shallow Set
(13pc) (12 mm–24 mm)	**313SMYA** Metric 12-Point Deep Set

Also Includes:		
	S4	18 7/8" Speeder
	S8	2 11/16" Universal Joint
	S12L	12" Sliding T-Handle
	S77A	Ratcheting Adaptor
	S80A	Sealed Ratchet
	SN18B	18" Breaker Bar
	SXK3	3 1/2" Extension
	SXK5	5" Knurled Extension
	SXK11	11" Knurled Extension

317MSPC

317MSPC Fractional 6-Point General Service Set 17 pcs, Includes:

	6-Point Shallow Sockets
3/8	**TW121A**
7/16	**TW141A**
1/2	**TW161A**
9/16	**TW181A**
5/8	**TW201**
11/16	**TW221**
3/4	**TW241**
13/16	**TW261**
7/8	**TW281**
15/16	**TW301**
1	**TW321**
1 1/16	**TW341**
1 1/8	**TW361**

Also Includes:		
	S80A	Sealed Ratchet
	SXK5	5" Knurled Extension
	SXK11	11" Knurled Extension
	SN18B	18" Breaker Bar

317AMMPC

317AMMPC Metric 6-Point General Service Set 17 pcs, Includes:

mm	6-Point Shallow Sockets
12	**TWM12A**
13	**TWM13A**
14	**TWM14A**
15	**TWM15A**
16	**TWM16**
17	**TWM17**
18	**TWM18**
19	**TWM19**
20	**TWM20**
21	**TWM21**
22	**TWM22**
23	**TWM23**
24	**TWM24**

Also Includes:		
	S80A	Sealed Ratchet
	SXK5	5" Knurled Extension
	SXK11	11" Knurled Extension
	SN18B	18" Breaker Bar

⚠WARNING

- Do not use "cheater bars" on handles
- Read safety precautions on pages W1 to W4

RATCHETS, HANDLES AND ACESSORIES Blue-Point®

BPRSR940

BPRSR940SG



Quick Release Ratchets

Stock No.	Description	Gear Teeth	Swing Arc	A	B	C	Repair Kit
BPRSR940	Standard Handle	40	9°	23/32	1 23/32	9 7/8	RKRBPRSR940
BPRSR940SG	Soft Grip Handle	40	9°	23/32	1 23/32	9 7/8	RKRBPRSR940

ASME®/ANSI® B107.10

BPR703 Quick Release Ratchet Set
1/4" drive BPRTR936, 3/8" drive BPRFR938 and 1/2" drive BPRSR940 Ratchets (3pc) in storage tray.

BPR703SG Quick Release Ratchet Set
1/4" drive BPRTR936SG, 3/8" drive BPRFR938SG and 1/2" drive BPRSR940SG Soft Grip Ratchets (3pc) in storage tray.

BLPBB1215

BLPBB1224



Breaker Bars

Stock No.	Description	A	B	C
BLPBB1215	Standard Handle	1 1/8	15	3/4
BLPBB1224	Telescoping Handle	1 1/16	12-24	5/8-7/8

S13TURBO

Turbo T-handle Speed

Name	Description	Handle Type
S13TURBO	1/2" square drive	Turbo T-Handle

BLPEXTK123

Knurled Extensions

Stock No.	B
BLPEXTK123	3
BLPEXTK126	6
BLPEXTK1210	10

303SXLBP



Locking/Knurled Extensions

Stock No.	A	B	Set Contains: 303SXLBP
SXLBP3	.65"	3	•
SXLBP6	.65"	6	•
SXLBP10	.65"	10	•

Set shown includes storage tray

BLPUJ12



Universal Joint

Stock No.	B
BLPUJ12	2 3/4

SOCKETS Blue-Point®

BLPSM1216

Shallow, mm

mm	6	Length
12	BLPSM1212	38.1
13	BLPSM1213	38.1
14	BLPSM1214	38.1
15	BLPSM1215	38.1
16	BLPSM1216	38.1
17	BLPSM1217	38.1
18	BLPSM1218	38.1
19	BLPSM1219	38.1
20	BLPSM1220	38.1
21	BLPSM1221	38.1
22	BLPSM1222	38.1
24	BLPSM1224	38.1

BLPS1234

Shallow, inches

	6	Length
3/8	BLPS1238	1 1/2
7/16	BLPS12716	1 1/2
1/2	BLPS1212	1 1/2
9/16	BLPS12916	1 1/2
5/8	BLPS1258	1 1/2
11/16	BLPS121116	1 1/2
3/4	BLPS1234	1 1/2
13/16	BLPS121316	1 1/2
7/8	BLPS1278	1 1/2
15/16	BLPS121516	1 9/16
1	BLPS121	1 9/16
1 1/16	BLPSB121116	1 9/16
1 1/8	BLPSB12118	1 3/4
1 3/16	BLPSB121316	1 3/4
1 1/4	BLPSB12114	1 3/4

TORX®/External

#	Stock No.	Length, inches
E18	BLPTE1218	1 1/2
E20	BLPTE1220	1 1/2
E22	BLPTE1222	1 1/2
E24	BLPTE1224	1 1/2

BLPTE1220

TORX BIT SOCKETS *Blue-Point*

BLPT1255

BLPTL1255

BLPTL1255TP

BLPT1255TP

TORX

	#	Stock No.	Length, inches
Standard	T55	BLPT1255	2 3/4
	T60	BLPT1260	2 3/4
Long	T55	BLPTL1255	4 3/4
	T60	BLPTL1260	4 3/4

TORX/Tamper Resistant

	#	Stock No.	Length, inches
Standard	T55	BLPT1255TP	2 5/16
	T60	BLPT1260TP	2 5/16
Long	T55	BLPTL1255TP	4 5/8
	T60	BLPTL1260TP	4 5/8

HEX BIT SOCKETS *Blue-Point*

BLPH1214

Hex, mm

mm		Length, mm
10	BLPH1210	60.3
12	BLPHM1212	60.3
14	BLPH1214	60.3
17	BLPH1217	60.3
19	BLPH1219	60.3

BLPH12916

Hex Standard, inches

		Length, inches
7/16	BLPH12716	2 7/16
1/2	BLPH1212	2 7/16
9/16	BLPH12916	2 7/16
5/8	BLPH1258	2 7/16
3/4	BLPH1234	2 7/16

⚠WARNING

- Do not use "cheater bars" on handles
- Do not use chrome or industrial finish hand tools with impact drivers
- Read safety precautions on pages W1 to W4

COMBINATION BIT SOCKET SETS Blue-Point®

Combination TORX® Socket / *Torx* Bit Socket Set (43pc)

BLPTSSC43

BLPTSSC43 *TORX* Sockets/*TORX* Bit Sockets Set

Set Components

(1/4" drive):
- Five external *TORX* sockets (E4–E8)
- 10 tamper resistant *TORX* socket drivers (T6–T30)

(3/8" drive):
- Four external *TORX* Sockets (E10–E16)
- Three tamper-resistant *TORX* socket drivers (T40, T45, T50)
- Three tamper-resistant long *TORX* socket drivers (T40, T45, T50)

(1/2" drive):
- Four external *TORX* sockets (E18–E24)
- Two tamper-resistant *TORX* socket drivers (T55, T60)
- Two tamper-resistant long *TORX* socket drivers (T55, T60)

Combination Socket Driver Set (30pc)

BLPHSSC30

BLPHSSC30 Hex Bit Socket Set

Set Components

(1/4" drive):
- Five metric hex bit sockets (2.5 mm–6 mm)
- Six hex bit sockets (1/8"–1/4")

(3/8" drive):
- Five metric hex bit sockets (6 mm–10 mm)
- Five hex bit sockets (7/32"–7/16")

(1/2" drive):
- Five metric hex bit sockets (10 mm–19 mm)
- Four hex bit sockets (1/2"–3/4")

TORX Sockets/ *TORX* and Hex Bit Sockets Set (87pc)

BLPTHC87

BLPTHC87 *TORX* Sockets/*TORX* and Hex Bit Sockets Set

Set Components

(1/4" drive):
- Five external *TORX* sockets (E4–E8)
- 10 *TORX* bit sockets (T6–T30)
- 10 long *TORX* bit sockets (T6–T30)
- Five metric hex bit sockets (2.5 mm–6 mm)
- Three long metric hex bit sockets (4 mm–6 mm)
- Six hex bit sockets (1/8"–1/4")
- Three long hex bit sockets (1/8"–3/16")

(3/8" drive):
- Four external *TORX* sockets (E10–E16)
- Three *TORX* bit sockets (T40–T50)
- Three long *TORX* bit sockets (T40–T50)
- Five metric hex bit sockets (6 mm–10 mm)
- Four long metric hex bit sockets (7 mm–10 mm)
- Four hex bit sockets (7/32"–3/8")
- Four long hex bit sockets (7/32"–3/8")

(1/2" drive):
- Four external *TORX* sockets (E18–E24)
- Two *TORX* bit sockets (T55, T60)
- Two long *TORX* bit sockets (T55, T60)
- Five metric hex bit sockets (10 mm–19 mm)
- Five hex bit sockets (7/16"–3/4")

GENERAL SERVICE SETS

BLPGSS1233

BLPGSS1233 1/2" Drive General Service Set

Set Components:
- 15 fractional (3/8"–1 1/4") and 12 metric (12 mm–24 mm) standard sockets
- One breaker bar
- One universal joint
- One quick release ratchet
- Three extensions (3", 6" and 10")

WHEN THE GOING GETS TOUGH, TECHS GO TO SNAP-ON.

Sometimes – particularly when it comes to heavy-duty machinery and vehicles – the bigger they are, the harder the job. That's why, for the tough tasks, Snap-on designed tough tools.

OUR STRONG SUIT.

At Snap-on, we're experts at making strong tools – and our 3/4" drive tools are no exception. Made with alloy-content steel, these tools are stronger, more durable and built to tackle any job.

DESIGNED FOR PERFORMANCE.

These tools aren't just for show. Uniform wall thickness provides greater access and improved performance where you need it most.

RATCHET HEADS/HANDLES

L872

GL872





L872H

L872RM

L872RJ

Heads

Stock No.	Description	Gear Teeth	Swing Arc	A	B	C	Repair Kit
L872	Sealed	32	11°	1 1/4	2 1/2	5 15/16	RKRQC4
GL872	Sealed Industrial Finish	32	11°	1 1/4	2 1/2	5 15/16	RKRQC4

Handles



Stock No.	Description	A	B	C
L872H	Plain w/ locking button	13/16	19 1/4	15/16
L872RM	Knurled	15/16	36	1 1/8
L872RJ	Knurled	15/16	19 1/4	1 1/8

Head and Handle Combinations

	Heads using 13/16" (small) diameter handle holes	Heads using 15/16" (large) diameter handle holes	
	L52B Sliding T-Handle Head	**L872** Ratchet Head	**L8112A** Breaker Bar Head
Short 19 1/4" Handle (Lock Button Both Ends)	**L872H**	–	**L872H**
Short 19 1/4" Handle (Lock Button End/Knurled End)	–	**L872RJ**	**L872RJ**
Long 36" Handle (Lock Button End/Knurled End)	–	**L872RM**	**L872RM**

ASME®/ANSI® B107.10

DRIVE HANDLES

L8112A



Breaker Bar/Breaker Bar Head

Head Only	A	B	C	Use with Handle
L8112A	15/16	1 9/16	3 11/16	L872RM or L872RJ

L52B



Sliding T-Handle

- Designed for heavier applications
- Spring and friction ball hold head in position

Stock No.	A	B
L52B	1 1/2	2 5/16

Use L52B with L872H handle.

SOCKET/RATCHET ACCESSORIES

L32

GL42

Extensions with Locking Button

Stock No.	Industrial Stock No.	A	B
L32	GL32	15/16	3
L42	GL42	15/16	5
L62	GL62	15/16	8
L122	GL122	15/16	16

Universal Joint

Stock No.	A	B
L82A	1 9/16	3 7/8



L82A

Adaptors

Stock No.	A	B	C	D
GLA12B	1/2	3/4	1 1/8	1 7/8
GLAS1F	3/4	1/2	1 7/16	2 7/16
GLA72A	3/4	1	1 7/16	2 5/8
GLA124A	1	3/4	1 13/16	2 3/4



GLAS1F

Ratchet Adaptor

Stock No.	Description	Gear Teeth	Swing Arc	A	B	Repair Kit
L672B	Ratchet Adaptor	44	8.2°	2 1/2	3 15/16	RKR881B

ASME®/ANSI® B107.10



L672B

FLANK DRIVE® SOCKETS



LDH482

LDHM382

Shallow, inches

	12	A	B	C	D	E
3/4	LDH242	1 1/8	1 7/16	1 1/4	2	17/32
13/16	LDH262	1 7/32	1 7/16	1 1/4	2	11/16
7/8	LDH282	1 5/16	1 7/16	1 1/4	2	11/16
15/16	LDH302	1 3/8	1 7/16	1 1/4	2	23/32
31/32	LDH312	1 13/32	1 7/16	1 1/4	2	23/32
1	LDH322	1 15/32	1 1/2	1 5/16	2 1/16	3/4
1 1/16	LDH342	1 9/16	1 1/2	1 3/8	2 1/8	3/4
1 1/8	LDH362	1 5/8	1 1/2	1 7/16	2 3/16	13/16
1 3/16	LDH382	1 11/16	1 1/2	1 1/2	2 1/4	7/8
1 1/4	LDH402	1 3/4	1 1/2	1 1/2	2 1/4	15/16
1 5/16	LDH422A	1 7/8	1 3/4	1 9/16	2 1/2	7/8
1 3/8	LDH442	1 15/16	1 3/4	1 9/16	2 1/2	15/16
1 7/16	LDH462	2	1 3/4	1 5/8	2 1/2	15/16
1 1/2	LDH482	2 1/8	1 3/4	1 11/16	2 1/2	1 1/16
1 9/16	LDH502	2 3/16	1 3/4	1 7/8	2 5/8	1 5/32
1 5/8	LDH522	2 1/4	1 3/4	1 7/8	2 5/8	1 5/32
1 11/16	LDH542	2 3/8	1 3/4	2	2 3/4	1 3/16
1 3/4	LDH562	2 7/16	1 3/4	2	2 3/4	1 3/16
1 13/16	LDH582	2 1/2	1 3/4	2 1/8	2 7/8	1 1/4
1 7/8	LDH602	2 9/16	1 3/4	2 1/4	3	1 5/16
2	LDH642	2 3/4	1 3/4	2 3/8	3 1/8	1 3/8
2 1/16	LDH662	2 15/16	1 3/4	2 3/8	3 1/8	1 3/8
2 1/8	LDH682	2 15/16	1 3/4	2 1/2	3 1/4	1 7/16
2 3/16	LDH702	2 15/16	1 3/4	2 1/2	3 1/4	1 1/2
2 1/4	LDH722	3 1/8	1 3/4	2 5/8	3 3/8	1 1/2
2 3/8	LDH762	3 1/4	1 3/4	2 7/8	3 5/8	1 3/4

ASME/ANSI B107.1

Shallow, mm

mm	12	A	B	C	D	E
22	LDHM222	31.1	34.6	30.2	50.8	17.1
24	LDHM242	33.4	34.6	31.8	50.8	17.9
27	LDHM272	37.3	39.5	31.8	54.0	19.9
30	LDHM302	41.0	39.8	34.0	57.2	21.8
36	LDHM362	49.3	41.2	35.1	58.7	22.1
41	LDHM412	55.1	44.5	42.9	66.5	26.7

LS342

Deep, inches

	6	A	B	C	D	E
1 1/16	LS342	1 9/16	1 1/2	2 3/4	3 1/2	1

⚠WARNING

- Do not use chrome or industrial finish hand tools with impact drivers
- Do not use "cheater bars" on handles
- Read safety precautions on pages W1 to W4

SPLINE SOCKETS

Snap-on® spline wrenching tools have been developed to service high tensile strength spline nuts and bolts widely used on both military and commercial aircraft. Precise, radial spline teeth engage the fastener teeth over a wider area to minimize stress, and allow application of high torque to reduce risk of damage to the fastener or to the tool.

Chrome tools comply with Military Spec. MS-33787 and MIL-W-8982. The unique spline wrenching configuration can also be used on ordinary six- and 12-point fasteners with an advantage similar to the *Snap-on* Flank Drive® wrenching system.



LES302

Shallow, inches

		Stock No.	A	B	C	D	E
#24	3/4	LES242	1 3/64	1 3/8	1	1 51/64	41/64
#30	15/16	LES302	1 3/8	1 3/8	1 7/64	1 59/64	51/64
#34	1 1/16	LES342	1 35/64	1 19/32	1	2 3/64	57/64
#36	1 1/8	LES362	1 5/8	1 1/2	1 3/16	2 3/16	15/16

SPECIAL APPLICATION SOCKETS

GLD139



Drag Link, inches

Stock No.	B x A	A	B	C
GLD138	13/64 x 1 3/8	1 3/8	13/64	2 3/16
GLD139	1/4 x 1 11/16	1 11/16	1/4	2 3/16

Military Vehicle Repair Socket

mm	6	A	B	C	D	E
30	IM382CD	47.6	41.2	36.5	53.9	19.0

IM382CD 6-Point Metric Shallow Impact Socket

- Assault Breacher Vehicle
- Utility Truck (Tamen: D00347K)
- Abrams M-1 Tank
- Bridge Launcher Carrier
- M1A2 Heavy Assault Bridge (hab)/Wolverine, 5420-01-430-4227
- Armored Vehicle Launch Bridge (M60A1 & M48A5)
- Combat Tank, Ft, 120 mm gun (M1A1)

TORX® BIT SOCKETS

T902E



TORX/Standard

#	Stock No.	A	B
T80	T802E	4 3/8	T802E2
T90	T902E	4 3/8	T902E2

HEX BIT SOCKETS

LAWM19E



Hex/Standard, mm

mm		A	B
17	LAWM17E	104.7	SAM17E2
19	LAWM19E	111.9	SAM19E2

HEX BIT SOCKETS

Hex/Standard, inches

		A	B
5/8	LAW120E	3 3/4	LAW120E2
3/4	LAW124E	4 3/8	LAW124E2



LAW120E

IMPACT ACCESSORIES

IM122B

Extensions

Stock No.	A	B
IM132A	1	3
IM62B	1	7
IM92B	1	10
IM122B	1	13



IP82

Swivel Ball Universal Joint

- Maximum accessibility design
- No internal spring used

Stock No.	A	B
IP82	1 3/4	3 5/32



IM124B

Adaptors

Stock No.	A	B	C	D
IM72	3/4	1 with Pin Hole	1 5/8	2 9/16
IM124B	1	3/4 with Pin Hole	2 3/8	2 13/16

IM243R

IM243P

3/4" Locking Rings and Pins

Stock No.	Description	Use with
IM182R	Rubber Locking Ring	All 3/4" Drive Sockets/Accessories
IM182P	Steel Locking Pin	All 3/4" Drive Sockets/Accessories
IMR2	Socket Retainer	All 3/4" Drive Sockets/Accessories
Use the following for the IM124B Adaptor:		
IM243R	Rubber Locking Ring (Use with IM243P)	1" Drive Sockets/Accessories Up to 1 3/8" (35 mm) plus IM124 Adaptor
IM243P	Steel Locking Pin (Use with IM243R)	1" Drive Sockets/Accessories Up to 1 3/8" (35 mm)

For use on SIM, IM, IMM and SIMM sockets and other accessories on this page.

⚠WARNING

- Do not use chrome or industrial finish hand tools with impact drivers
- Read safety precautions on pages W1 to W4

FLANK DRIVE® IMPACT SOCKETS

IMM302



Shallow, mm

mm	6	12	A	B	C	D	E	Set Contains: 425IMM 6
17	IMM172A	–	29.2	41.1	27.2	50.8	13.7	•
18	IMM182A	–	31.6	41.1	27.2	50.8	12.7	•
19	IMM192A	–	31.8	41.1	27.2	50.8	13.7	•
20	IMM202A	IMMD202B	35.1	41.1	27.2	50.8	14.0	•
21	IMM212A	–	34.9	41.1	27.2	50.8	15.2	•
22	IMM222A	–	38.1	41.1	27.2	50.8	15.2	•
23	IMM232A	–	36.3	41.1	27.2	50.8	16.5	•
24	IMM242A	–	39.5	41.1	26.4	50.8	16.5	•
25	IMM252A	–	39.6	41.1	26.4	50.8	16.3	•
26	IMM262A	–	39.6	41.1	26.4	50.8	17.5	•
27	IMM272A	–	42.6	41.1	26.4	50.8	19.0	•
28	IMM282	–	44.7	41.1	32.8	57.2	17.5	•
29	IMM292	–	46.0	41.1	32.8	57.2	18.0	•
30	IMM302	–	47.0	44.5	32.8	57.2	19.1	•

mm	6	12	A	B	C	D	E	Set Contains: 425IMM 6
31	IMM312	–	49.2	44.5	32.8	57.2	19.1	•
32	IMM322	–	50.8	44.5	32.8	57.2	20.6	•
33	IMM332	–	50.8	44.5	32.8	57.2	20.3	•
34	IMM342	–	50.8	44.5	32.8	57.2	22.4	•
35	IMM352	–	54.0	44.5	32.8	57.2	22.4	•
36	IMM362	–	54.0	44.5	32.8	57.2	22.4	•
38	IMM382	–	57.2	44.5	32.8	57.2	23.9	•
40	IMM402	–	59.7	44.5	45.5	69.9	28.4	•
41	IMM412	–	60.5	44.5	33.5	57.2	26.2	•
42	IMM422A	–	63.1	44.5	46.9	66.9	28.6	
46	IMM462	–	66.7	44.5	45.5	69.9	29.0	•
50	IMM502	–	71.4	44.5	52.6	76.2	31.0	•

IMMD202B 12-Point Metric Shallow Impact Socket
Specific applications include removing the head bolts on Caterpillar® C7, C8, C9 and C10 engines.

IM402

IMD302A

Shallow, inches

11	6	12	A	B	C	D	E	Set Contains: 429IM 6	417IM 6	418IM 6	429IMD 12	417IMD 12	418IMD 12
9/16	IM182A	IMD182A	1	1 5/8	1	1 3/4	7/16	•			•		
5/8	IM202A	IMD202A*	1 3/32	1 5/8	1	1 3/4	1/2	•			•		
11/16	IM222A	IMD222A	1 5/32	1 5/8	1	1 3/4	9/16	•			•		
3/4	IM242A	IMD242A	1 1/4	1 5/8	1	1 3/4	9/16	•	•		•	•	
13/16	IM262A	IMD262A	1 3/8	1 5/8	1 1/8	1 7/8	5/8	•	•		•	•	
7/8	IM282A	IMD282A	1 1/2	1 5/8	1 1/8	1 7/8	5/8	•	•		•	•	
15/16	IM302A	IMD302A*	1 9/16	1 5/8	1 1/8	1 7/8	3/4	•	•		•	•	
1	IM322A	IMD322A*	1 5/8	1 5/8	1 1/4	2	3/4	•	•		•	•	
1 1/16	IM342A	IMD342A	1 11/16	1 5/8	1 1/4	2	3/4	•	•		•	•	
1 1/8	IM362	IMD362A	1 7/8	1 5/8	1 3/8	2 1/8	3/4	•	•		•	•	
1 3/16	IM382	IMD382	1 7/8	1 5/8	1 5/16	2 1/8	3/4	•	•		•	•	
1 1/4	IM402	IMD402	2	1 3/4	1 3/8	2 1/8	13/16	•	•	•	•	•	•
1 5/16	IM422	IMD422	2 1/8	1 3/4	1 1/2	2 1/4	7/8	•	•	•	•	•	•
1 3/8	IM442	IMD442	2 1/8	1 3/4	1 1/2	2 1/4	7/8	•	•	•	•	•	•
1 7/16	IM462	IMD462	2 1/4	1 3/4	1 1/2	2 1/4	7/8	•	•	•	•	•	•
1 1/2	IM482	IMD482	2 1/4	1 3/4	1 1/2	2 1/4	15/16	•	•	•	•	•	•
1 9/16	IM502	IMD502	2 7/16	1 3/4	1 9/16	2 3/8	15/16	•	•	•	•	•	•
1 5/8	IM522	IMD522	2 7/16	1 3/4	1 5/8	2 3/8	7/8	•	•	•	•	•	•
1 11/16	IM542	IMD542	2 1/2	1 3/4	1 13/16	2 9/16	1	•	•	•	•	•	•
1 3/4	IM562	IMD562	2 1/2	1 3/4	1 13/16	2 9/16	1	•	•	•	•	•	•
1 13/16	IM582	IMD582	2 5/8	1 3/4	1 5/8	2 5/8	1 1/4	•		•	•		•
1 7/8	IM602	IMD602	2 5/8	1 3/4	1 3/4	2 3/4	1 1/8	•		•	•		•
1 15/16	IM622A	IMD622	2 3/4	1 3/4	1 9/16	2 27/32	1 3/32	•		•	•		•
2	IM642A	IMD642	2 7/8	1 3/4	1 15/16	2 7/8	1 1/8	•		•	•		•
2 1/16	IM662A	IMD662	3	1 3/4	1 7/8	2 7/8	1 3/16	•		•	•		•
2 1/8	IM682A	IMD682	3	1 3/4	1 3/4	3	1 1/4	•		•	•		•
2 3/16	IM702A	IMD702	3 1/4	1 3/4	2 3/16	3 3/16	1 5/16	•		•	•		•
2 1/4	IM722A	IMD722	3 1/4	1 3/4	2 3/16	3 3/16	1 3/8	•		•	•		•
2 3/8	IM762A	IMD762	3 1/2	1 3/4	2 3/8	3 1/2	1 7/16	•		•	•		•

*Applications include repair of heavy duty trucks and off-road equipment, most diesel engines including *Caterpillar* and Cummins® plus head bolts and bearing cap bolts.

IMD242A Applications: Most *Caterpillar* head bolts, Detroit Diesel® main bearing cap bolts, K19 *Cummins* head bolts.



SIMDM212

Deep, mm

mm	6	12	A	B	C	D	E
17	SIMM172	–	28.9	41.1	52.6	76.2	12.7
18	SIMM182	–	31.7	41.3	76.2	101.6	12.7
19	SIMM192	–	32.4	41.1	51.8	76.2	14.2
21	SIMM212	SIMDM212	34.2 (33.3)	41.1 (41.3)	37.4 (19)	76.2	14.2 (18.3)
22	SIMM222	–	35.8	41.1	37.4	76.2	14.2
23	SIMM232	–	35.8	41.1	37.2	76.2	16.3
24	SIMM242	–	37.7	41.1	37.0	76.2	16.5
26	SIMM262	–	39.6	41.1	36.7	76.2	16.3
27	SIMM272	–	42.8	41.1	38.4	76.2	19.1
30	SIMM302	–	46.8	41.1	58.2	82.6	18.5
32	SIMM322	–	50.8	44.5	58.9	82.6	19.1
33	SIMM332	–	52.4	44.5	57.4	82.6	22.4
35	SIMM352	–	52.7	44.5	57.2	82.6	21.6
36	SIMM362	–	54.0	44.5	62.5	88.9	22.9
38	SIMM382	–	57.2	44.5	65.3	88.9	23.8
41	SIMM412*	–	55.1	44.5	74.9	100.1	26.7
46	SIMM462	–	76.7	44.5	72.4	101.6	29.1

*Applications include usage on stud piloted, budd style wheels.

Dimensions in ( ) apply to 12-point sockets only.

SIMDM212 Application: Flywheel bolts on Cummins® ISX engines.

423SIM

Deep, inches

in	6	A	B	C	D	E	6
9/16	SIM182	1	1 5/8	2 1/16	3	9/16	•
5/8	SIM202	1 1/16	1 5/8	2 1/16	3	9/16	•
11/16	SIM222	1 1/8	1 5/8	2 1/16	3	9/16	•
3/4	SIM242	1 1/4	1 5/8	2	3	9/16	•
13/16	SIM262	1 3/8	1 5/8	2	3	5/8	•
7/8	SIM282	1 1/2	1 5/8	2	3	5/8	•
15/16	SIM302	1 5/8	1 5/8	2	3	5/8	•
1	SIM322	1 5/8	1 5/8	2	3	11/16	•
1 1/16	SIM342	1 3/4	1 5/8	2	3	11/16	•
1 1/8	SIM362	1 3/4	1 5/8	2	3	3/4	•
1 3/16	SIM382	2	1 3/4	2 1/4	3 1/4	3/4	•
1 1/4	SIM402	2	1 3/4	2 1/4	3 1/4	7/8	•
1 5/16	SIM422	2 1/8	1 3/4	2 9/16	3 1/4	7/8	•
1 3/8	SIM442	2 1/8	1 3/4	2 1/4	3 1/4	7/8	•
1 7/16	SIM462	2 3/16	1 3/4	2 1/2	3 1/2	7/8	•
1 1/2	SIM482	2 1/4	1 3/4	2 1/2	3 1/2	15/16	•
1 9/16	SIM502	2 5/16	1 3/4	2 1/2	3 1/2	15/16	•
1 5/8	SIM522	2 7/16	1 3/4	2 1/2	3 1/2	15/16	•
1 11/16	SIM542	2 1/2	1 3/4	2 1/2	3 1/2	1	•
1 3/4	SIM562	2 1/2	1 3/4	2 1/2	3 1/2	1	•
1 13/16	SIM582	2 5/8	1 3/4	2 3/4	3 3/4	1 1/16	•
1 7/8	SIM602	2 11/16	1 3/4	2 3/4	3 3/4	1 1/8	•
2	SIM642A	2 13/16	1 3/4	2 3/4	3 3/4	1 1/8	•

Set Contains: 423SIM

Larger sizes available on special order.

WARNING • Read safety precautions on pages W1 to W4

FLANK DRIVE® IMPACT SOCKETS

SIMML242

Extra Deep, mm

mm	6	A	B	C	D	E
24	SIMML242	39.5	38.1	101.6	127	16.5

SIMML242 6-Point Metric Extra Deep Impact Socket
- For removing and installing the head bolts on Cummins® ISX engines

IMM503TW

IMFS482A

Shallow Thin Wall, mm

mm	6	A	B	C	D	E
50	IMM503TW	65	57.2	49	82.6	3.71
55	IMM553TW	75.9	60.5	53.8	88.9	34.8

Shallow Thin Wall, inches

11	6	A	B	C	D	E
1 1/2	IMFS482A	54	44.4	36.6	63.5	24.1

IMFDL242

IMSLE242A



Deep Thin Wall, inches

11	12	A	B	C	D	E
3/4	IMFDL242	1 3/8	1 5/8	4 3/4	5 3/4	1/2

Larger sizes available on special order.

IMFDL242 Deep Thin Wall Impact Socket
- Designed to remove the head bolts on Caterpillar® C12, C15, C16 and 3406ES vehicles where the front two and back two head bolts are positioned under the valve covers where thin walled long sockets are required
- Additional applications include Detroit Diesel® main bearing cap bolts and 19 mm head bolts on Mercedes-Benz® MBE904/MBE906 EGR engines (2007 and later)
- 3/4" wrench size, 3/4" drive, 5 3/4" long

Inverted TORX®

#	Stock No.	A	B	C
E24	IMSLE242A	1 5/8	1 5/8	3 3/4

IMSLE242A Inverted *TORX* Impact Socket
- For removing and installing head bolts on MaxxForce® 11 and 13 engines found on D15 International® Trucks from 2010–current
- Used for installation of shear type E24 bolts during alignment of suspensions on Hendrickson® and Dayton® trailers
- Manufactured from special alloy steel, precision forged and heat treated for optimum strength and durability

434HDC

414AHD

434HDC 12-Point Fractional General Service Set 35 Tools, includes:

	12-Point Shallow Sockets
3/4	LDH242
13/16	LDH262
7/8	LDH282
15/16	LDH302
31/32	LDH312
1	LDH322
1 1/16	LDH342
1 1/8	LDH362
1 3/16	LDH382
1 1/4	LDH402
15/16	LDH422A
1 3/8	LDH442
1 7/16	LDH462
1 1/2	LDH482
1 9/16	LDH502
1 5/8	LDH522
1 11/16	LDH542
1 3/4	LDH562
1 13/16	LDH582
1 7/8	LDH602
2	LDH642
2 1/16	LDH662
2 1/8	LDH682
2 3/16	LDH702
2 1/4	LDH722
2 3/8	LDH762

Also Includes:		
	L32	3" Extension
	L62	8" Extension
	L122	16" Extension
	L52B	Sliding Head
	L872	Ratchet Head
	L82A	Universal Joint
	L8112A	Breaker Bar Head
	L672B	Ratchet Adaptor
	L872H	19 1/4" Handle
	PB434HD	Storage Case w/ Foam

414AHD 12-Point Fractional General Service Set (Tools with Storage Tray) 15 Tools, Includes:

	12-Point Shallow Sockets
1 1/16	LDH342
1 1/8	LDH362
1 1/4	LDH402
1 5/16	LDH422A
1 3/8	LDH442
1 7/16	LDH462
1 1/2	LDH482
1 5/8	LDH522
1 3/4	LDH562
1 7/8	LDH602

Also Includes:		
	L62	8" Extension
	L122	16" Extension
	L872	Ratchet Head
	L872RJ	19 1/4" Handle
	L8112A	Breaker Bar Head

⚠WARNING

- Do not use chrome or industrial finish hand tools with impact drivers
- Do not use "cheater bars" on handles
- Read safety precautions on pages W1 to W4

TOOLS THAT FLEX THEIR MUSCLE.

Big jobs call for real muscle. That's why, when techs are in need of some serious brawn, they reach for our 1" – 2 1/2" drive tools. When you've got a docket full of heavy-duty operations ahead of you – work on semis, construction equipment, hydraulics or other heavy metal – Snap-on® drive tools provide just the right might. Going mano-a-mano against some big jobs? Hey – we've got your back.

Flank Drive® — Our *Flank Drive* wrenching system grabs fasteners on the flats, increasing torque and preventing fastener corners from rounding off.

Impact Sockets — Made with a blend of alloy steel, our impact sockets possess a lower heat-treated hardness than hand sockets. They're built to withstand the repeated cycle loads of pneumatic and cordless impact wrenches. And, Snap-on *Flank Drive* impact sockets exceed ANSI performance standards.

Heads

Stock No.	Description	Gear Teeth	Swing Arc	A	B	C	Repair Kit
L873	Sealed	30	12°	1 1/2	3 1/8	7 7/8	RKRQC5
GL873	Sealed Industrial Finish	30	12°	1 1/2	3 1/8	7 7/8	RKRQC5



1" Handle/Handle Extension



L53HB Handle
- Plain handle with locking buttons at both ends
- Use on 1" drive ratchet heads, breaker bar heads and sliding T-heads

L853HA1 Handle Extension
- Knurled grip extension handle attaches to L53HB handle for added leverage
- Only used with L53HB handle; L853HA1 will not connect directly to L873 ratchet head

Stock No.	A	B
L53HB	1 1/8	29
L853HA1	1 3/8	36

L873

GL873

L53HB

L853HA1

Head and Handle Combinations

Stock No.	Description	Required Handle	Optional Handle Extension
L873	Ratchet Head	L53HB	L853HA1
L113H	Breaker Bar Head	L53HB	—
L53A	Sliding T-handle Head	L53HB	—

ASME®/ANSI® B107.10

DRIVE HANDLES



L113H

Breaker Bar/Breaker Bar Head

Handle w/ Head	Length	Head Only	A	B	C	Handle Only
L113H	32 5/32	L113	15/16	2 1/8	4 29/32	L53HB



L53

Sliding T-Handle

Stock No.	C	Sliding Head Only Stock No.	A	Handle Stock No.
L53	29	L53A	2	L53HB

SOCKET/RATCHET ACCESSORIES



L63

Extension with Locking Button

Stock No.	A	B
L63	1 1/4	8



GLA72A

Adaptors

Stock No.	A	B	C	D
GLA72A	3/4	1	1 7/16	2 5/8
GLA124A	1	3/4	1 13/16	2 3/4

ASME/ANSI B107.10

SPLINE SOCKETS



Snap-on® spline wrenching tools have been developed to service high tensile strength spline nuts and bolts widely used on both military and commercial aircraft. Precise, radial spline teeth engage the fastener teeth over a wider area to minimize stress, and allow application of high torque to reduce risk of damage to the fastener or to the tool. Chrome tools comply with Military Spec. MS-33787 and MIL-W-8982. The unique spline wrenching configuration can also be used on ordinary six- and 12-point fasteners with an advantage similar to the *Snap-on* Flank Drive® wrenching system.

Shallow, inches

		Stock No.	A	B	C	D	E
#32	1	LES323	1 29/64	1 55/64	1 35/64	2 7/16	53/64
#34	1 1/16	LES343	1 35/64	1 55/64	1 37/64	2 35/64	57/64
#38	1 3/16	LES383	1 23/64	1 63/64	1 25/32	2 51/64	1 1/64

LES323

⚠WARNING

- Do not use "cheater bars" on handles
- Do not use chrome or industrial finish hand tools with impact drivers
- Read safety precautions on pages W1 to W4

HEX BIT SOCKETS

IMA283



Hex Standard, inches

		A	B
7/8	IMA283	5 5/8	IMA238-2
1	IMA323	5 5/8	IMA323-2

IMPACT ACCESSORIES

IM133

Extensions with Pin Hole

Stock No.	A	B
IM133	1	3
IM63B	1 1/8	7 1/8
IM123	1 3/8	13 1/8

IP83



Swivel Universal Joint with Pin Hole

Stock No.	A	B
IP83	2 1/2	4 3/16

IM35



Adaptors with Pin Hole

Stock No.	A	B	C	D
IM72	3/4	1 with Pin Hole	1 5/8	2 9/16
IM124B	1	3/4	2 3/8	2 13/16
IM35	1	1 1/2	2 1/4	3 1/2
IM53	1 1/2	1	3 1/4	4 1/4

IM243R

IM243P

1" Drive Locking Rings and Pins

Stock No.	Description	Use with
IM483R	Rubber Locking Pin (Use with IM483P)	All Spline Drive Sockets/Accessories plus 1" Drive Sockets from 1 7/16" (35 mm)
IM243R	Rubber Locking Ring (Use with IM243P)	1" Drive Sockets/Accessories Up to 1 3/8" (35 mm) plus IM124 Adaptor
IM243P	Steel Locking Pin, (Use with IM243R)	1" Drive Sockets/Accessories Up to 1 3/8" (35 mm)
IMR3	Socket Retainer	All 1" Drive Sockets/Accessories, All #5 Spline Drive Sockets/Accessories
IM483P	Steel Locking Pin (Use with IM483R)	All Spline Drive Sockets/Accessories plus 1" Drive Sockets from 1 7/16" (35 mm)



Shallow, mm

IMM503

Set Contains: 516IMM

mm	6	A	B	C	D	E	6
27	IMM273	44.5	53.8	27.0	57.2	17.5	•
30	IMM303	47.8	53.8	27.0	57.2	17.5	•
32	IMM323	50.8	53.8	33.3	63.5	19.1	•
33	IMM333	52.3	53.8	33.3	63.5	22.4	•
35	IMM353	53.8	53.8	33.5	63.5	22.4	•
36	IMM363	57.2	57.2	34.3	63.5	22.4	•
38	IMM383	59.7	57.2	40.1	69.9	23.6	•
41	IMM413A	59.9	57.2	39.6	69.9	26.4	•
46	IMM463	69.9	60.5	44.2	76.2	30.0	•
50	IMM503	69.9	60.5	49.3	82.6	31.2	•
55	IMM553	82.6	60.3	46.7	82.6	31.8	•
60	IMM603	88.9	57.2	51.6	88.9	38.1	•
65	IMM653	92.1	60.5	63.8	101.6	45.7	•
70	IMM703	95.3	60.5	62.2	101.6	45.7	•
75	IMM753	104.8	60.5	67.1	108.0	51.6	•
80	IMM803	108.7	61.1	65.9	108.7	47.6	•

Shallow, inches

IM703

Set Contains: 521IIM 516IM 522IM

II	6	A	B	C	D	E			
3/4	IM243	1 7/16	2 1/8	1	2 1/8	11/16	•		
13/16	IM263	1 7/16	2 1/8	1	2 1/8	11/16	•		
7/8	IM283	1 1/2	2 1/8	1	2 1/8	11/16	•		
15/16	IM303	1 19/32	2 1/8	1	2 1/8	11/16	•		
1	IM323	1 11/16	2 1/8	1 1/16	2 1/4	11/16	•		
1 1/16	IM343	1 3/4	2 1/8	1 1/16	2 1/4	11/16	•		
1 1/8	IM363	1 7/8	2 1/8	1 1/16	2 1/4	11/16	•		
1 3/16	IM383	1 7/8	2 1/8	1 1/16	2 1/4	11/16	•		
1 1/4	IM403	2	2 1/8	1 3/16	2 3/8	3/4	•		
1 5/16	IM423	2 1/16	2 1/8	1 15/16	2 1/2	7/8	•		
1 3/8	IM443	2 1/8	2 1/8	1 15/16	2 1/2	7/8	•		
1 7/16	IM463	2 1/4	2 1/4	1 7/16	2 1/2	15/16	•		
1 1/2	IM483B	2 3/8	2 1/4	1 7/16	2 5/8	15/16	•		
1 9/16	IM503A	2 3/8	2 1/4	1 7/16	2 5/8	15/16	•		
1 5/8	IM523A	2 3/8	2 1/4	1 5/8	2 3/4	1 1/16	•		
1 11/16	IM543	2 9/16	2 3/8	1 5/8	2 3/4	1 1/16	•		
1 3/4	IM563	2 5/8	2 3/8	1 23/32	2 7/8	1 5/32	•		
1 13/16	IM583	2 3/4	2 3/8	1 23/32	2 15/16	1 3/16	•		
1 7/8	IM603	2 3/4	2 3/8	1 23/32	2 15/16	1 3/16	•		
1 15/16	IM623	2 3/4	2 3/8	1 23/32	2 15/16	1 3/16	•		
2	IM643	3	2 3/8	1 31/32	3 1/8	1 9/32	•		
2 1/16	IM663	3	2 3/8	1 31/32	3 1/8	1 9/32		•	
2 1/8	IM683	3 1/8	2 3/8	2 3/32	3 1/4	1 9/32		•	
2 3/16	IM703	3 1/4	2 3/8	2 5/32	3 11/32	1 7/16		•	
2 1/4	IM723	3 1/4	2 3/8	2 5/32	3 11/32	1 7/16		•	
2 5/16	IM743	3 3/8	2 3/8	2 5/32	3 1/2	1 1/2		•	
2 3/8	IM763	3 1/2	2 3/8	2 5/32	3 1/2	1 1/2		•	
2 7/16	IM783	3 1/2	2 3/8	2 5/32	3 1/2	1 1/2		•	
2 1/2	IM803	3 1/2	2 3/8	2 1/8	3 5/8	1 5/8		•	
2 9/16	IM823	3 5/8	2 3/8	2 1/8	3 5/8	1 5/8		•	
2 5/8	IM843	3 3/4	2 3/8	2 5/16	3 3/4	1 5/8		•	
2 11/16	IM863	3 3/4	2 3/8	2 1/2	4	1 13/16		•	

Set Contains: 521IIM 516IM 522IM

II	6	A	B	C	D	E			
2 3/4	IM883	3 3/4	2 3/8	2 7/16	4	1 13/16		•	
2 13/16	IM903	4	2 3/8	2 7/16	4	1 13/16		•	
2 7/8	IM923	4	2 3/8	2 7/16	4	1 13/16		•	
2 15/16	IM943	4 1/8	2 3/8	2 5/8	4 1/4	2		•	
3	IM963	4 1/4	2 3/8	2 5/8	4 1/4	2 1/16		•	
3 1/8	IM1003	4 1/4	2 3/8	2 9/16	4 1/4	2 1/16		•	
3 1/4	IM1043	4 1/2	2 3/8	2 9/16	4 1/4	2 1/16		•	
3 3/8	IM1083	4 5/8	2 3/8	2 3/4	4 1/2	2 1/4		•	
3 1/2	IM1123	4 3/4	2 3/8	3	4 3/4	2 1/4		•	
3 5/8	IM1163	5	2 3/8	2 15/16	4 3/4	2 5/16			•
3 11/16	IM1183	5 5/16	2 3/8	3 3/16	5	2 7/16			•
3 3/4	IM1203	5 1/8	2 3/8	2 7/8	4 3/4	2 3/8			•
3 13/16	IM1223	5 3/8	2 3/8	3 1/8	5	2 1/2			•
3 7/8	IM1243	5 1/4	2 3/8	3 1/8	5	2 9/16			•
3 15/16	IM1263	5 3/8	2 3/8	3 3/8	5 1/4	2 9/16			•
4	IM1283	5 1/2	2 3/8	3 1/16	5	2 9/16			•
4 1/16	IM1303	5 1/2	2 3/8	3 1/16	5	2 9/16			•
4 1/8	IM1323	5 9/16	2 3/8	3 1/16	5	2 9/16			•
4 3/16	IM1343	6	2 3/8	3	5	2 9/16			•
4 1/4	IM1363	5 3/4	2 3/8	3 1/4	5 1/4	2 5/8			•
4 5/16	IM1383	5 25/32	2 3/8	3 7/16	5 1/2	2 5/8			•
4 3/8	IM1403	5 13/16	2 3/8	3 3/16	5 1/4	2 5/8			•
4 7/16	IM1423	6	2 3/8	3 3/16	5 1/4	2 11/16			•
4 1/2	IM1443	6	2 3/8	3 3/16	5 1/4	2 5/8			•
4 9/16	IM1463	6 1/2	2 3/8	3 7/16	5 1/2	2 3/4			•
4 5/8	IM1483	6 7/16	2 3/8	3 7/8	6	3 1/16			•
4 3/4	IM1523	6 5/8	2 3/8	3 5/8	5 3/4	2 7/8			•
4 7/8	IM1563	7	2 3/8	3 9/16	5 3/4	3			•
5	IM1603	7	2 3/8	3 1/2	5 3/4	3			•
5 3/8	IM1723	7 1/2	2 3/8	4 7/16	6 3/4	3 9/16			•
5 3/4	IM1843	8 1/4	2 3/8	4 5/16	6 3/4	3 9/16			•

⚠WARNING • Read safety precautions on pages W1 to W4

FLANK DRIVE® IMPACT SOCKETS



SIM563

Deep, inches

						Set Contains: 519SIM	520SIM	517SIM
11	6	A	B	C	D	E			
7/8	SIM283	1 19/32	2 1/8	1 13/16	3	5/8	•		
15/16	SIM303	1 19/32	2 1/8	1 13/16	3	11/16	•		
1	SIM323	1 19/32	2 1/8	1 13/16	3	3/4	•		
1 1/16	SIM343	1 3/4	2 1/8	1 13/16	3	3/4	•		
1 1/8	SIM363	1 13/16	2 1/8	1 13/16	3	3/4	•		
1 3/16	SIM383	1 13/16	2 1/8	1 13/16	3	3/4	•		
1 1/4	SIM403	2 1/16	2 1/8	2 1/16	3 1/4	7/8	•		
1 5/16	SIM423*	2 1/16	2 1/8	2 1/16	3 1/4	7/8	•		
1 3/8	SIM443	2 1/16	2 1/8	2 1/16	3 1/4	7/8	•		
1 7/16	SIM463A	2 1/4	2 1/8	2 3/32	3 1/4	29/32	•		
1 1/2	SIM483B**	2 3/8	2 1/4	2 11/32	3 1/2	1	•		
1 9/16	SIM503A	2 3/8	2 1/4	2 11/32	3 1/2	1	•		
1 5/8	SIM523B	2 3/8	2 1/4	2 1/2	3 5/8	1	•		
1 11/16	SIM543	2 1/2	2 3/8	2 7/16	3 5/8	1 1/8	•		
1 3/4	SIM563	2 3/4	2 3/8	2 11/16	3 7/8	1 1/8	•		
1 13/16	SIM583	2 3/4	2 3/8	2 11/16	3 7/8	1 3/16	•		
1 7/8	SIM603	2 3/4	2 3/8	2 11/16	3 7/8	1 3/16	•		
1 15/16	SIM623	3	2 3/8	2 15/16	4 1/8	1 1/4	•		
2	SIM643	3	2 3/8	2 15/16	4 1/8	1 5/16	•		
2 1/16	SIM663	3	2 1/4	2 15/16	4 1/4	1 5/16		•	
2 1/8	SIM683	3 1/8	2 1/4	2 7/8	4 1/4	1 5/16		•	
2 3/16	SIM703	3 1/4	2 1/4	3 1/8	4 1/2	1 1/2		•	
2 1/4	SIM723	3 1/4	2 3/8	3 1/8	4 1/2	1 1/2		•	
2 5/16	SIM743	3 3/8	2 3/8	3 1/16	4 1/2	1 1/2		•	
2 3/8	SIM763	3 1/2	2 3/8	3 1/16	4 1/2	1 1/2		•	
2 7/16	SIM783	3 1/2	2 3/8	3 1/16	4 1/2	1 1/2		•	
2 1/2	SIM803	3 1/2	2 3/8	3 1/4	4 3/4	1 5/8		•	
2 9/16	SIM823	3 5/8	2 3/8	3 1/4	4 3/4	1 5/8		•	
2 5/8	SIM843	3 3/4	2 3/8	3 1/4	4 3/4	1 5/8		•	
2 11/16	SIM863	3 3/4	2 3/8	3 1/2	5	1 13/16		•	
2 3/4	SIM883	3 3/4	2 3/8	3 7/16	5	1 13/16		•	
2 13/16	SIM903	4	2 3/8	3 7/16	5	1 3/4		•	
2 7/8	SIM923	4	2 3/8	3 7/16	5	1 3/4		•	
2 15/16	SIM943	4 1/8	2 3/8	3 3/8	5	1 3/4		•	
3	SIM963	4 1/4	2 3/8	3 5/8	5 1/4	1 3/4		•	
3 1/8	SIM1003	4 1/4	2 3/8	3 9/16	5 1/4	1 7/8		•	
3 1/4	SIM1043	4 1/2	2 3/8	3 9/16	5 1/4	1 7/8		•	
3 3/8	SIM1083	4 1/2	2 3/8	4	5 3/4	2 1/4		•	
3 1/2	SIM1123	4 3/4	2 3/8	4	5 3/4	2 1/4		•	
3 5/8	SIM1163	5	2 3/8	3 15/16	5 3/4	2 1/4			•
3 11/16	SIM1183	5 5/16	2 3/8	3 15/16	5 3/4	2 7/16			•
3 3/4	SIM1203	5 1/8	2 3/8	3 7/8	5 3/4	2 1/4			•
3 13/16	SIM1223	5 3/8	2 3/8	4 1/8	6	2 1/2			•
3 7/8	SIM1243	5 1/4	2 3/8	4 3/8	6 1/4	2 9/16			•
3 15/16	SIM1263	5 1/2	2 3/8	4 3/8	6 1/4	2 3/8			•
4	SIM1283	5 1/2	2 3/8	4 5/16	6 1/4	2 9/16			•
4 1/16	SIM1303	5 1/2	2 3/8	4 5/16	6 1/4	2 1/2			•
4 1/8	SIM1323	5 9/16	2 3/8	4 5/16	6 1/4	2 9/16			•
4 3/16	SIM1343	6	2 3/8	4 1/4	6 1/4	2 1/2			•
4 7/16	SIM1423	6	2 3/8	4 3/16	6 1/4	2 11/16			•
4 1/2	SIM1443	6	2 3/8	4 7/16	6 1/2	2 3/4			•
4 9/16	SIM1463	6 1/2	2 3/8	4 7/16	6 1/2	2 3/4			•
4 5/8	SIM1483	6 5/8	2 3/8	4 3/8	6 1/2	2 13/16			•
4 3/4	SIM1523	6 5/8	2 3/8	4 5/8	6 3/4	2 7/8			•
4 7/8	SIM1563	7	2 3/8	4 9/16	6 3/4	3			•
5	SIM1603	7	2 3/8	4 1/2	6 3/4	3			•
5 3/8	SIM1723	7 1/2	2 3/8	5 7/16	7 3/4	3 9/16			
5 3/4	SIM1843	8 1/4	2 3/8	5 5/16	7 3/4	3 9/16			

*Applications include use on heavy duty wheel lug nuts.
**Applications include use on wheel lug nuts on stud piloted/budd style wheel systems.

FLANK DRIVE® IMPACT SOCKETS



Deep, mm

mm	6	A	B	C	D	E
30	**SIMM303**	46.0	53.7	46.0	76.2	19.1
32	**SIMM323**	52.3	53.7	76.2	82.6	22.4
33	**SIMM333***	52.3	53.7	53.3	82.5	22.4
38	**SIMM383**	60.3	57.2	59.7	88.9	25.4

*Applications include use on wheel lug nuts on Hub Piloted wheel systems.

SIMM323

Shallow Thin Wall, mm

mm	6	A	B	C	D	E
70	**IMM705TW**	91.2	82.6	67.5	114.3	44.3

IMM705TW

SPECIAL APPLICATION IMPACT SOCKETS

Shallow Single Square, inches

	4	A	B	C	D	E
3/4	**IM724**	1 15/16	2 1/8	31/32	2 1/8	21/32
13/16	**IM726**	1 15/16	2 1/8	31/32	2 1/8	21/32
7/8	**IM728**	2 1/16	2 1/8	31/32	2 1/8	21/32
15/16	**IM730**	2 1/16	2 1/8	15/16	2 1/8	5/8
1	**IM732**	2 1/8	2 1/8	1 3/32	2 1/4	25/32
1 1/8	**IM736**	2 1/4	2 1/4	1 3/32	2 1/4	25/32

IM724

Shallow Double Square, inches

	8	A	B	C	D	E
1 1/4	**IM740**	2 3/8	2 3/8	1 1/8	2 3/8	13/16

IM740

1 1/2" DRIVE HANDLES



L55

Sliding T-handle

Stock No.	C	Sliding Head Only Stock No.	A	Handle Stock No.
L55	36	**L55-2**	2 7/8	**L55-1**

⚠WARNING

- Do not use "cheater bars" on handles
- Read safety precautions on pages W1 to W4

1 1/2" AND #5 SPLINE DRIVE IMPACT ACCESSORIES

IM105

Extensions with Pin Hole

Stock No.	A	B
IM105	2	10
IM155	2	15
IM205	2	20

IP85

Swivel Universal Joint



Stock No.	Retention Type	A	B
IP85	Pin Hole	3 5/8	6 1/16

IM53



Square Drive Adaptors

Stock No.	A	B	C	D
IM35	1	1 1/2	2 1/4	3 1/2
IM53	1 1/2	1	3 1/4	4 1/4
IM59	1 1/2	2 1/2	3 1/4	4 3/4
IM95	2 1/2	1 1/2	5	6 3/8

IMSA3



Spline-to-Square Adaptor

Stock No.	A	B	C	D
IMSA3	1" Square	No. 5, 14 Tooth	2 3/8	3 3/8

IM243R

IM243P

IMR3

Ring and Pin Chart for 1", 1 1/2" and 5 Spline Drive Impact Sockets and Accessories

The following are required for tool use:

Stock No.	Description	Use with
IM243R	Rubber Locking Ring (Use with IM243P)	1" Drive Sockets/Accessories Up to 1 3/8" (35 mm) plus IM124 Adaptor
IM243P	Steel Locking Pin, use with IM243R	1" Drive Sockets/Accessories Up to 1 3/8" (35 mm)
IMR3	Socket Retainer	All 1" Drive Sockets/Accessories, All #5 Spline Drive Sockets/Accessories
IM483R	Rubber Locking Pin (Use with IM483P)	All Spline Drive Sockets/Accessories plus 1" Drive Sockets from 1 7/16" (35 mm)
IM483P	Steel Locking Pin (Use with IM483R)	All Spline Drive Sockets/Accessories plus 1" Drive Sockets from 1 7/16" (35 mm)
IM445R	Synthetic Rubber Locking Ring, for IM105, IM205, IM59, IP85 and "IGE Series" sockets	All 1 1/2" Drive Sockets/Accessories

FLANK DRIVE® IMPACT SOCKETS



IMM365

Shallow, mm

mm	6	A	B	C	D	E
36	IMM365	73.0	82.6	34.5	76.2	25.4
38	IMM385	73.0	82.6	34.5	76.2	25.4
41	IMM415	73.0	82.6	34.5	76.2	27.7
46	IMM465	79.4	82.6	40.9	82.6	29.7
50	IMM505	79.4	82.6	47.2	88.9	31.8
55	IMM555	88.9	82.6	47.2	88.9	35.6
60	IMM605	94.5	82.6	58.2	101.6	38.6
65	IMM655	99.2	82.6	56.6	101.6	41.4
70	IMM705	105.6	82.6	61.7	108.0	45.7
75	IMM755	111.1	82.6	66.5	114.3	47.2
80	IMM805	116.6	82.6	77.2	127	50.7

Shallow, inches

							Set Contains: 619IME	616IM	618IM	609IM
	6	A	B	C	D	E				
1 3/8	IM445	2 7/8	3 1/4	1 3/8	3	1	•			
1 7/16	IM465	2 7/8	3 1/4	1 3/8	3	1	•			
1 1/2	IM485	3	3 1/4	1 3/8	3	1	•			
1 9/16	IM505	3	3 1/4	1 3/8	3	1	•			
1 5/8	IM525	2 7/8	3 1/4	1 3/8	3	1 1/16	•			
1 11/16	IM545	3	3 1/4	1 3/8	3	1 1/16	•			
1 3/4	IM565	3 1/8	3 1/4	1 5/8	3 1/4	1 1/8	•			
1 13/16	IM585	3 1/8	3 1/4	1 5/8	3 1/4	1 3/16	•			
1 7/8	IM605	3 1/8	3 1/4	1 7/8	3 1/2	1 3/16	•			
1 15/16	IM625A	3 1/8	3 1/4	1 7/8	3 1/2	1 1/4	•			
2	IM645	3 1/2	3 1/4	1 7/8	3 1/2	1 1/4	•			
2 1/16	IM665	3 1/2	3 1/4	1 7/8	3 1/2	1 7/16	•			
2 1/8	IM685	3 1/2	3 1/4	1 7/8	3 1/2	1 7/16	•			
2 3/16	IM705	3 1/2	3 1/4	1 7/8	3 1/2	1 1/2	•			
2 1/4	IM725A	3 3/4	3 1/4	2 1/8	3 3/4	1 7/16	•			
2 5/16	IM745	3 3/4	3 1/4	2	3 3/4	1 1/2	•			
2 3/8	IM765	3 7/8	3 1/4	2 1/4	4	1 1/2	•			
2 7/16	IM785	3 7/8	3 1/4	2 1/4	4	1 9/16	•			
2 1/2	IM805	3 7/8	3 1/4	2 1/4	4	1 5/8	•			
2 9/16	IM825	3 7/8	3 1/4	2 1/4	4	1 5/8		•		
2 5/8	IM845	4 1/16	3 1/4	2 1/2	4 1/4	1 11/16		•		
2 11/16	IM865	4 1/8	3 1/4	2 1/2	4 1/4	1 11/16		•		
2 3/4	IM885	4 1/4	3 1/4	2 3/8	4 1/4	1 13/16		•		
2 13/16	IM905	4 3/8	3 1/4	2 3/8	4 1/4	1 13/16		•		
2 7/8	IM925	4 3/8	3 1/4	2 3/8	4 1/4	1 13/16		•		
2 15/16	IM945	4 3/8	3 1/4	2 5/8	4 1/2	1 15/16		•		
3	IM965	4 7/16	3 1/4	2 5/8	4 1/2	1 15/16		•		
3 1/16	IM985	4 11/16	3 1/4	2 5/8	4 1/2	1 15/16		•		
3 1/8	IM1005	4 3/4	3 1/4	2 7/8	4 3/4	2		•		
3 3/16	IM1025	4 3/4	3 1/4	2 1/2	4 1/2	2		•		
3 1/4	IM1045	4 3/4	3 1/4	2 3/4	4 3/4	2 1/8		•		
3 5/16	IM1065	5	3 1/4	2 3/4	4 3/4	2 1/8		•		
3 3/8	IM1085	5	3 1/4	2 3/4	4 3/4	2 1/4		•		
3 7/16	IM1105	5	3 1/4	3	5	2 1/4		•		
3 1/2	IM1125	5 1/8	3 1/4	3	5	2 1/4		•		
3 9/16	IM1145	5 1/8	3 1/4	2 7/8	5	2 1/4			•	
3 5/8	IM1165	5 1/8	3 1/4	2 7/8	5	2 5/16			•	
3 11/16	IM1185	5 1/4	3 1/4	3 1/8	5 1/4	2 3/8			•	
3 3/4	IM1205	5 3/8	3 1/4	3 1/8	5 1/4	2 1/2			•	
3 13/16	IM1225	5 3/8	3 1/4	3 1/8	5 1/4	2 1/2			•	
3 7/8	IM1245	5 1/2	3 1/4	3 1/8	5 1/4	2 9/16			•	
3 15/16	IM1265	5 1/2	3 1/4	3 1/8	5 1/4	2 9/16			•	
4	IM1285	5 5/8	3 1/4	3 1/4	5 1/2	2 5/8			•	
4 1/16	IM1305	5 3/4	3 1/4	3 1/4	5 1/2	2 11/16			•	
4 1/8	IM1325	5 13/16	3 1/4	3 1/4	5 1/2	2 3/4			•	
4 1/4	IM1365	6	3 1/4	3 1/2	5 3/4	2 3/4			•	
4 5/16	IM1385	6 1/4	3 1/4	3 1/2	5 3/4	2 7/8			•	
4 3/8	IM1405	6 1/4	3 1/4	3 3/8	5 3/4	2 15/16			•	
4 7/16	IM1425	6 1/4	3 1/4	3 3/8	5 3/4	3			•	
4 1/2	IM1445	6 1/4	3 1/4	3 5/8	6	3 1/8			•	
4 5/8	IM1485	6 1/2	3 1/4	3 7/8	6 1/4	3 1/8			•	
4 3/4	IM1525	6 9/16	3 1/4	3 7/8	6 1/4	3 1/8			•	
4 7/8	IM1565	6 11/16	3 1/4	3 3/4	6 1/4	3 3/16			•	
5	IM1605	6 7/8	3 1/4	3 3/4	6 1/4	3 3/16				•
5 3/8	IM1725	7 5/16	3 1/4	3 5/8	6 1/4	3 7/16				•
5 3/4	IM1845	7 11/16	3 1/4	4 1/2	7 1/4	3 11/16				•
6 1/8	IM1965	8	3 1/4	4 3/8	7 1/4	3 15/16				•
6 1/2	IM2085	8 3/8	3 1/4	5	8	4 3/16				•
6 7/8	IM2205	8 13/16	3 1/4	4 7/8	8	4 3/8				•
7 1/4	IM2325	9 3/16	3 1/4	6 1/8	9 1/4	4 5/8				•
7 5/8	IM2445	9 1/2	3 1/4	6 1/4	9 1/2	4 7/8				•
8	IM2565	10	3 1/4	6 5/8	10	5 1/8				•



IM445

WARNING • Read safety precautions on pages W1 to W4

FLANK DRIVE® IMPACT SOCKETS



SIM485

Deep, inches

	6	A	B	C	D	E
1 3/16	SIM445	2 7/8	3 1/4	2 5/8	4 1/4	1
1 7/16	SIM465	2 7/8	3 1/4	2 5/8	4 1/4	1
1 1/2	SIM485	2 7/8	3 1/4	2 5/8	4 1/4	1
1 5/8	SIM525	2 7/8	3 1/4	2 5/8	4 1/4	1 1/8
1 11/16	SIM545	3	3 1/4	2 5/8	4 1/4	1 1/8
2	SIM645	3 3/8	3 1/4	3 1/8	4 3/4	1 1/4
2 1/16	SIM665	3 7/16	3 1/4	3 1/8	4 3/4	1 5/16
2 3/16	SIM705	3 1/2	3 1/4	3 3/8	5	1 3/8
2 1/4	SIM725	3 9/16	3 1/4	3 5/8	5 1/4	1 1/2
2 5/16	SIM745	3 5/8	3 1/4	3 1/2	5 1/4	1 9/16
2 3/8	SIM765	3 3/4	3 1/4	3 1/2	5 1/4	1 9/16
2 7/16	SIM785	3 3/4	3 1/4	3 1/2	5 1/4	1 9/16
2 1/2	SIM805	3 7/8	3 1/4	3 1/2	5 1/4	1 5/8
2 9/16	SIM825	3 7/8	3 1/4	3 3/4	5 1/2	1 5/8
2 5/8	SIM845	4	3 1/4	3 3/4	5 1/2	1 11/16
2 11/16	SIM865	4 1/8	3 1/4	3 3/4	5 1/2	1 3/4
2 3/4	SIM885	4 1/8	3 1/4	3 5/8	5 1/2	1 13/16
2 13/16	SIM905	4 1/4	3 1/4	3 7/8	5 3/4	1 13/16
2 7/8	SIM925	4 5/16	3 1/4	3 7/8	5 3/4	1 7/8
2 15/16	SIM945	4 3/8	3 1/4	3 7/8	5 3/4	1 15/16
3	SIM965	4 7/16	3 1/4	4 1/8	6	1 15/16
3 1/16	SIM985	4 9/16	3 1/4	4 1/8	6	2
3 1/8	SIM1005	4 5/8	3 1/4	4 1/8	6	2 1/16
3 3/16	SIM1025	4 11/16	3 1/4	4 1/4	6 1/4	2 1/8
3 1/4	SIM1045	4 3/4	3 1/4	4 1/4	6 1/4	2 1/8
3 5/16	SIM1065	4 7/8	3 1/4	4 1/4	6 1/4	2 3/16
3 3/8	SIM1085	4 15/16	3 1/4	4 1/4	6 1/4	2 1/4
3 7/16	SIM1105	5	3 1/4	4 1/2	6 1/2	2 1/4
3 1/2	SIM1125	5 1/16	3 1/4	4 1/2	6 1/2	2 5/16
3 9/16	SIM1145	5 1/8	3 1/4	4 3/8	6 1/2	2 3/8
3 5/8	SIM1165	5 1/4	3 1/4	4 5/8	6 3/4	2 7/16
3 11/16	SIM1185	5 5/16	3 1/4	4 5/8	6 3/4	2 7/16
3 3/4	SIM1205	5 3/8	3 1/4	4 5/8	6 3/4	2 1/2
3 13/16	SIM1225	5 7/16	3 1/4	4 7/8	7	2 1/2
3 7/8	SIM1245	5 1/2	3 1/4	4 7/8	7	2 9/16
3 15/16	SIM1265	5 5/8	3 1/4	5 1/8	7 1/4	2 9/16
4	SIM1285	5 5/8	3 1/4	5	7 1/4	2 5/8
4 1/16	SIM1305	5 3/4	3 1/4	5 1/4	7 1/2	2 11/16
4 1/8	SIM1325	5 13/16	3 1/4	5 1/4	7 1/2	2 3/4
4 1/4	SIM1365	6	3 1/4	5 1/2	7 3/4	2 13/16
4 5/16	SIM1385	6 1/4	3 1/4	5 1/2	7 3/4	3
4 3/8	SIM1405	6 1/4	3 1/4	5 3/8	7 3/4	3
4 1/2	SIM1445	6 1/4	3 1/4	5 5/8	8	3
4 5/8	SIM1485	6 3/8	3 1/4	5 5/8	8	3 1/16
4 3/4	SIM1525	6 1/2	3 1/4	5 5/8	8	3 1/16

IM243P

IM243R

Locking Rings and Pins for 1 1/2" Extensions, Adaptors, Impact Sockets and 2 1/2" Impact Sockets

Stock No.	Description	Use with
IM243R	Rubber Locking Ring (Use with IM243P)	1" Drive Sockets/Accessories Up to 1 3/8" (35 mm) plus IM124 Adaptor
IM243P	Steel Locking Pin, (Use with IM243R)	1" Drive Sockets/Accessories Up to 1 3/8" (35 mm)
IM445R	Synthetic Rubber Locking Ring, for IM105, IM205, IM59, IP85 and "IGE Series" sockets	All 1 1/2" Drive Sockets/Accessories
IM729P	Steel Locking Pin	All 2 1/2" Drive Sockets/Accessories

FLANK DRIVE® IMPACT SOCKETS

Shallow, inches

						Set Contains: 716IM	713IM	714IM	711IM
	6	A	B	C	D	6	6	6	6
2	IM649	3 7/16	5	2 31/32	5 1/2	•			
2 3/16	IM709	3 21/32	5	3 7/32	5 3/4	•			
2 1/4	IM729	3 23/32	5	3 7/32	5 3/4	•			
2 3/8	IM769	3 7/8	5	3 15/32	6	•			
2 1/2	IM809	4	5	3 15/32	6	•			
2 9/16	IM829	4 3/32	5	3 15/32	6	•			
2 5/8	IM849	4 5/32	5	3 15/32	6	•			
2 3/4	IM889	4 5/16	5	3 23/32	6 1/4	•			
2 7/8	IM929	4 7/16	5	3 23/32	6 1/4	•			
2 15/16	IM949	4 17/32	5	3 23/32	6 1/4	•			
3	IM969	4 19/32	5	3 23/32	6 1/4	•			
3 1/8	IM1009	4 3/4	5	3 31/32	6 1/2	•			
3 1/4	IM1049	5	5	3 31/32	6 1/2	•			
3 3/8	IM1089	5	5	3 31/32	6 1/2	•			
3 7/16	IM1109	5	5	4 7/32	6 3/4	•			
3 1/2	IM1129	5 3/16	5	4 7/32	6 3/4	•			
3 5/8	IM1169	5 5/16	5	4 7/32	6 3/4		•		
3 3/4	IM1209	5 15/32	5	4 15/32	7		•		
3 7/8	IM1249	5 5/8	5	4 15/32	7		•		
4	IM1289	5 3/4	5	4 15/32	7		•		
4 1/16	IM1309	5 27/32	5	4 15/32	7		•		
4 1/8	IM1329	5 29/32	5	4 23/32	7 1/4		•		
4 1/4	IM1369	6 1/16	5	4 23/32	7 1/4		•		
4 3/8	IM1409	6 7/32	5	4 23/32	7 1/4		•		
4 1/2	IM1449	6 11/32	5	4 31/32	7 1/2		•		
4 5/8	IM1489	6 1/2	5	4 31/32	7 1/2		•		
4 3/4	IM1529	6 21/32	5	4 31/32	7 1/2		•		
4 7/8	IM1569	6 25/32	5	5 7/32	7 3/4		•		
5	IM1609	6 15/16	5	5 7/32	7 3/4		•		
5 1/8	IM1649	7 3/32	5	5 7/32	7 3/4			•	
5 1/4	IM1689	7 7/32	5	5 15/32	8			•	
5 3/8	IM1729	7 3/8	5	5 15/32	8			•	
5 7/16	IM1749	7 7/16	5	5 3/8	8			•	
5 1/2	IM1769	7 17/32	5	5 5/8	8 1/4			•	
5 5/8	IM1809	7 21/32	5	5 19/32	8 1/4			•	
5 3/4	IM1849	7 13/16	5	5 19/32	8 1/4			•	
5 7/8	IM1889	7 31/32	5	5 13/16	8 1/2			•	
6	IM1929	8 3/32	5	5 3/4	8 1/2			•	
6 1/8	IM1969	8 1/4	5	5 3/4	8 1/2			•	
6 1/4	IM20099	8 13/32	5	5 31/32	8 3/4			•	
6 3/8	IM2049	8 17/32	5	5 15/16	8 3/4			•	
6 1/2	IM2089	8 11/16	5	5 15/16	8 3/4			•	
6 5/8	IM2129	8 27/32	5	6 5/32	9			•	
6 3/4	IM2169	8 31/32	5	6 1/8	9				•
6 7/8	IM2209	9 1/8	5	6 1/8	9				•
7	IM2249	9 9/32	5	6 5/16	9 1/4				•
7 1/8	IM2289	9 13/32	5	6 5/16	9 1/4				•
7 1/4	IM2329	9 9/16	5	6 17/32	9 1/2				•
7 3/8	IM2369	9 23/32	5	6 1/2	9 1/2				•
7 1/2	IM2409	9 7/8	5	6 1/2	9 1/2				•
7 5/8	IM2449	10	5	6 23/32	9 3/4				•
7 3/4	IM2489	10 5/32	5	6 11/16	9 3/4				•
7 7/8	IM2529	10 5/16	5	6 11/16	9 3/4				•
8	IM2569	10 7/16	5	6 7/8	10				•



IM2209

WARNING • Read safety precautions on pages W1 to W4



IMM1159

Shallow, mm

mm	6	A	B	C	D	Set Contains: 713IMM	710IMM	709IMM
60	IMM609	97.6	127	88.1	152.4	•		
65	IMM659	104.0	127	88.1	152.4	•		
67	IMM679	105.6	127	88.1	152.4	•		
70	IMM709	109.5	127	94.5	158.8	•		
71	IMM719	110.3	127	94.5	158.8	•		
75	IMM759	115.1	127	94.5	158.8	•		
80	IMM809	121.4	127	100.8	165.1	•		
85	IMM859	127.0	127	100.8	165.1	•		
86	IMM869	127.0	127	100.8	165.1	•		
90	IMM909	132.6	127	107.2	171.5	•		
95	IMM959	138.9	127	107.2	171.5	•		
98	IMM989	142.1	127	113.5	177.8	•		
100	IMM1009	144.5	127	113.5	177.8	•		
105	IMM1059	150.8	127	119.9	184.2		•	
110	IMM1109	156.4	127	119.9	184.2		•	
115	IMM1159	161.9	127	126.2	190.5		•	
120	IMM1209	168.3	127	126.2	190.5		•	
125	IMM1259	173.8	127	132.6	196.9		•	
130	IMM1309	179.4	127	132.6	196.9		•	
135	IMM1359	185.7	127	138.9	203.2		•	
140	IMM1409	191.3	127	142.9	209.6		•	
145	IMM1459	196.9	127	142.1	209.6		•	
150	IMM1509	203.2	127	147.6	215.9		•	
155	IMM1559	208.8	127	146.1	215.9			•
160	IMM1609	215.1	127	151.6	222.3			•
165	IMM1659	215.1	127	150.8	222.3			•
170	IMM1709	226.2	127	156.4	228.6			•
175	IMM1759	232.6	127	161.9	235.0			•
180	IMM1809	238.1	127	160.3	235.0			•
185	IMM1859	243.7	127	165.9	241.3			•
190	IMM1909	250.0	127	165.1	241.3			•
200	IMM2009	261.9	127	169.9	247.7			•

IM243R

IM243P

IMR3

Master Ring and Pin Chart for Impact Sockets and Accessories

The following are required for tool use:

Stock No.	Description	Used With
IM182R	Rubber Locking Ring	All 3/4" Drive Sockets/Accessories
IMR2	Socket Retainer	All 3/4" Drive Sockets/Accessories
IM243R	Rubber Locking Ring (Use with IM243P)	1" Drive Sockets/Accessories Up to 1 3/8" (35 mm) plus IM124 Adaptor
IM243P	Steel Locking Pin, use with IM243R	1" Drive Sockets/Accessories Up to 1 3/8" and up to 35 mm
IMR3	Socket Retainer	All 1" Drive Sockets/Accessories, All #5 Spline Drive Sockets/Accessories
IM483R	Rubber Locking Pin (Use with IM483P)	All Spline Drive Sockets/Accessories plus 1" Drive Sockets from 1 7/16" (35 mm)
IM483P	Steel Locking Pin (Use with IM483R)	All Spline Drive Sockets/Accessories plus 1" Drive Sockets from 1 7/16" (35 mm)
IM445R	Synthetic Rubber Locking Ring, for IM105, IM205, IM59, IP85 and "IGE Series" sockets	All 1 1/2" Drive Sockets/Accessories
IM729P	Steel Locking Pin	All 2 1/2" Drive Sockets/Accessories

NO BETTER WRENCHES. NO MATTER WHERE YOU TURN.

The entire wrench line is top-of-the-line. Snap-on® wrenches are manufactured with special alloy steel, precision-forged, and heat-treated for optimum strength and durability. Nickel chrome finishing helps protect against corrosion and makes it easy to wipe clean. Longer-length handles provide increased leverage and better access to those hard to reach areas.

FLANK DRIVE® PLUS

The *Flank Drive* Plus design "bites" into the fastener for additional flat-to-flat contact and prevents slipping and rounding of the fastener. This design delivers up to 62% more turning power than conventional open-end wrenches. And, the *Flank Drive* box-end wrenching system grips the fastener flats and provides up to 15-20% more turning power.

STANDARD BOX END

The box end is rotated 7.5° away from the handle so the wrench can be flipped to get a new grip in tight situations.

Set at a 15° angle for knuckle clearance and increased access in any space.

RATCHETING BOX END

Up to 80 gear teeth let the wrench move easier with less swing arc.

Reversible, dual-pawl, ratcheting box end yields smoother operation with greater strength.

FLANK DRIVE® PLUS REVERSIBLE RATCHETING COMBINATION

- *Flank Drive* Plus profile on open end delivers up to 62% more turning power than conventional wrenches
- Longer overall length increases leverage to let the wrench do the work
- Box end utilizes the *Flank Drive* profile, the proven design for turning fasteners
- Ratcheting gear features up to 80 teeth, minimizing swing arc in tight spaces
- Low-profile, easy-action, reverse lever won't get in your way



SOEXRM710

Ratcheting Combination, Standard Handle, mm

Set Contains: SOEXRM710

mm	12	A	B	C	D	E	Reverse Lever Repair Kit	12
6	SOEXRM6	16.3	13.8	6.7	3.7	125.5	RKW12	
7	SOEXRM7	16.8	15.1	6.9	3.9	137.4	RKW1	
8	SOEXRM8	17.8	17.0	7.1	4.3	149	RKW1	
9	SOEXRM9	19.6	19.2	7.9	4.7	164	RKW2	
10	SOEXRM10	21.5	21.1	8.3	5.1	179	RKW3	•
11	SOEXRM11	22.0	23.4	8.6	5.5	194	RKW3	•
12	SOEXRM12	23.5	25.1	9.3	5.9	207	RKW4	•
13	SOEXRM13	25.0	27.2	10.2	6.3	221	RKW5	•
14	SOEXRM14	27.0	29.2	10.2	6.7	235	RKW6	•
15	SOEXRM15	28.5	31.2	11.1	7.1	249	RKW7	•
16	SOEXRM16	30.5	33.0	11.1	7.4	261	RKW8	•
17	SOEXRM17	32.0	35.1	12.0	7.8	277	RKW9	•
18	SOEXRM18	34.5	37.1	12.0	8.2	291	RKW10	•
19	SOEXRM19	36.5	39.4	12.9	8.6	305	RKW11	•

ASME® B107.100

Set includes storage tray

SOEXR707

Ratcheting Combination, Standard Handle, inches

Set Contains: SOEXR707

11	12	A	B	C	D	E	Reverse Lever Repair Kit	12
1/4	SOEXR8	21/32	9/16	9/32	5/32	4 15/16	RKW12	
5/16	SOEXR10	27/32	11/16	9/32	3/16	5 29/32	RKW1	
3/8	SOEXR12	27/32	27/32	5/16	3/16	7	RKW3	•
7/16	SOEXR14	7/8	29/32	11/32	7/32	7 5/8	RKW3	•
1/2	SOEXR16	31/32	1 1/16	13/32	1/4	8 11/16	RKW5	•
9/16	SOEXR18	1 1/16	1 5/32	13/32	1/4	9 1/4	RKW6	•
5/8	SOEXR20	1 3/16	1 5/16	7/16	9/32	10 1/4	RKW8	•
11/16	SOEXR22	1 1/4	1 3/8	15/32	5/16	10 7/8	RKW9	•
3/4	SOEXR24	1 7/16	1 9/16	1/2	11/32	12	RKW11	•

ASME B107.100

Set includes storage tray

FLANK DRIVE RATCHETING COMBINATION

- Open end features a patented geometry, providing a quick, ratchet-like action when turning fasteners
- *Flank Drive* wrenching system on box end provides up to 15%–20% more turning power, limiting the risk of tool or fastener damage
- Manufactured from special alloy steel, precision forged and heat treated for optimum strength and durability
- Ratcheting gear features up to 80 teeth, minimizing swing arc in tight spaces
- Box ends are offset 15° for knuckle clearance
- Sized for optimum comfort and balance
- Nickel-chrome plating helps protect against corrosion and makes cleaning easy

SRXRM710

Reversible Ratcheting Box/Speed Open End, mm

Set Contains: SRXRM710

mm	12	A	B	C	D	E	Gear Teeth	12
10	SRXRM10	21.5	19.1	8.3	5.1	179	72	•
11	SRXRM11	22.0	21.0	8.6	5.6	194	72	•
12	SRXRM12	23.5	22.9	9.3	5.9	207	80	•
13	SRXRM13	25.0	24.8	10.2	6.4	221	80	•
14	SRXRM14	27.0	26.7	10.2	6.6	235	80	•
15	SRXRM15	28.5	28.6	11.1	7.4	249	80	•
16	SRXRM16	30.5	30.5	11.1	7.4	261	80	•
17	SRXRM17	32.0	32.4	12.0	7.9	277	80	•
18	SRXRM18	34.5	34.3	12.0	8.2	291	80	•
19	SRXRM19	36.5	36.2	12.9	8.6	305	80	•

ASME B107.100

Set includes storage tray

OEXRM710

OEXR707

Ratcheting Combination, Standard Handle, mm

Set Contains: OEXRM710

mm	12	A	B	C	D	E	12
6	OEXRM6	16.3	13.2	6.7	3.5	122.9	
7	OEXRM7	16.8	15.2	6.9	3.9	134.6	
8	OEXRM8	17.8	17.0	7.1	4.3	147.0	
9	OEXRM9	19.6	19.2	8.0	4.7	159.0	
10	OEXRM10	21.5	21.1	8.4	5.1	171.0	•
11	OEXRM11	22.0	23.4	8.7	5.6	183.0	•
12	OEXRM12	23.5	25.1	9.3	5.9	195.0	•
13	OEXRM13	25.0	27.2	10.2	6.4	207.0	•
14	OEXRM14	27.0	29.2	10.2	6.7	219.0	•
15	OEXRM15	28.5	31.2	11.1	7.1	231.0	•
16	OEXRM16	30.5	33.0	11.1	7.4	243.0	•
17	OEXRM17	32.0	35.1	12.0	7.8	255.0	•
18	OEXRM18	34.5	37.1	12.0	8.2	267.0	•
19	OEXRM19	36.5	39.4	12.9	8.7	279.0	•

ASME® B107.100 Sets include storage tray

Ratcheting Combination, Standard Handle, inches

Set Contains: OEXR707

	12	A	B	C	D	E	12
1/4	OEXR8	5/8	17/32	1/4	1/8	4 27/32	
3/8	OEXR12	27/32	27/32	5/16	3/16	6 3/4	•
7/16	OEXR14	7/8	29/32	11/32	7/32	7 3/16	•
1/2	OEXR16	31/32	1 1/16	13/32	1/4	8 3/16	•
9/16	OEXR18	1 1/16	1 5/32	13/32	1/4	8 5/8	•
5/8	OEXR20	1 3/16	1 5/16	15/32	9/32	5 9/16	•
11/16	OEXR22	1 7/32	1 3/8	15/32	5/16	10 1/16	•
3/4	OEXR24	1 15/32	1 9/16	1/2	11/32	11	•

ASME B107.100 Set includes storage tray

OXIRM707

OXIR707

Ratcheting Combination, Short Handle, mm

Set Contains: OXIRM707 / OXIRM705

mm	12	A	B	C	D	E	12	12
6	OXIRM6	16.3	13.2	6.7	3.5	80.8		
7	OXIRM7	16.8	15.2	6.9	3.9	84.8		
8	OXIRM8	17.8	17.0	7.1	4.3	88.7	•	
9	OXIRM9	19.6	19.2	8.0	4.8	92.7	•	
10	OXIRM10	21.5	21.1	8.4	5.1	97.0	•	
11	OXIRM11	22.0	23.4	8.7	5.6	101.1	•	
12	OXIRM12	23.5	25.1	9.3	5.9	105.4	•	
13	OXIRM13	25.0	27.2	10.2	6.4	109.5	•	
14	OXIRM14	27.0	29.2	10.2	6.7	113.8	•	
15	OXIRM15	28.5	31.2	11.1	7.1	118.1		•
16	OXIRM16	30.5	33.0	11.1	7.4	122.2		•
17	OXIRM17	32.0	35.1	12.0	7.8	126.5		•
18	OXIRM18	34.5	37.1	12.0	8.2	130.6		•
19	OXIRM19	36.5	39.4	12.9	8.7	135.4		•

ASME B107.100 Set includes storage tray

Ratcheting Combination, Short Handle, inches

Set Contains: OXIR707

	12	A	B	C	D	E	12
1/4	OXIR8	21/32	17/32	9/32	5/32	3 3/16	
5/16	OXIR10	21/32	11/16	9/32	3/16	3 17/32	
3/8	OXIR12	27/32	27/32	5/16	3/16	3 27/32	•
7/16	OXIR14	7/8	29/32	11/32	7/32	3 31/32	•
1/2	OXIR16	31/32	1 1/16	13/32	1/4	4 5/16	•
9/16	OXIR18	1 1/16	1 5/32	13/32	1/4	4 15/32	•
5/8	OXIR20	1 3/16	1 5/16	15/32	9/32	4 13/16	•
11/16	OXIR22	1 7/32	1 3/8	15/32	5/16	4 31/32	•
3/4	OXIR24	1 15/32	1 9/16	1/2	11/32	5 11/32	•

ASME B107.100 Set includes storage tray

⚠WARNING

- Do not use "cheater bars" on handles
- Read safety precautions on pages W1 to W4

REVERSIBLE RATCHETING COMBINATION Blue-Point®

BOERM712

Ratcheting Combination, Standard Handle, 15° Offset, mm

mm	12	A	B	C	D	E	Set Contains: BOERM712 12	Set Contains: BOERM704 12
6	BOERM6	16.3	16.3	6.6	3.6	114.3		
6	BOERM7	16.5	16.4	6.6	3.9	125		
8	BOERM8	17.8	17.7	6.5	4.0	135	•	
9	BOERM9	19.5	20.0	7.4	4.0	150	•	
10	BOERM10	21.5	21.9	8.0	5.0	160	•	
11	BOERM11	22.0	23.9	8.5	5.5	170	•	
12	BOERM12	23.5	25.0	9.0	5.5	175	•	
13	BOERM13	25.0	25.9	10.0	6.3	180	•	
14	BOERM14	27.0	29.9	10.0	6.5	190	•	
15	BOERM15	28.5	31.1	11.0	7.0	200	•	
16	BOERM16	30.5	33.6	11.0	7.0	210	•	
17	BOERM17	32.0	36.5	12.0	7.0	230	•	
18	BOERM18	34.5	38.5	12.0	8.0	240	•	
19	BOERM19	36.5	38.7	12.9	8.7	250	•	
21	BOERM21	39.4	43.2	13.7	9.4	266.7		•
22	BOERM22	41.7	45.7	14.5	9.4	285.8		•
24	BOERM24	46.5	49.5	15.5	11.2	304.8		•
25	BOERM25	47.2	52.8	15.5	11.2	327.2		•

ASME® B107.100 Sets include storage tray

BOER708

Ratcheting Combination, Standard Handle, 15° Offset, inches

11	12	A	B	C	D	E	Set Contains: BOER708 12	Set Contains: BOER704 12
1/4	BOER8	21/32	21/32	1/4	5/32	4 1/2		
5/16	BOER10	11/16	11/16	1/4	5/32	5 5/16	•	
3/8	BOER12	27/32	7/8	5/16	3/16	6 5/16	•	
7/16	BOER14	7/8	15/16	11/32	7/32	6 11/16	•	
1/2	BOER16	31/32	1 1/32	13/32	1/4	7 1/16	•	
9/16	BOER18	1 1/16	1 3/16	13/32	1/4	7 1/2	•	
5/8	BOER20	1 3/16	1 5/16	7/16	9/32	8 1/4	•	
11/16	BOER22	1 1/4	1 7/16	15/32	9/32	9 1/16	•	
3/4	BOER24	1 7/16	1 17/32	1/2	11/32	9 13/16	•	
13/16	BOER26	1 9/16	1 23/32	17/32	3/8	10 1/2		•
7/8	BOER28	1 21/32	1 27/32	9/16	3/8	11 1/4		•
15/16	BOER30	1 27/32	1 31/32	5/8	7/16	12		•
1	BOER32	1 7/8	2 3/32	5/8	7/16	12 7/8		•

ASME B107.100 Set includes storage tray

BOERMS712

Ratcheting Combination, Short Handle, 15° Offset, mm

mm	12	A	B	C	D	E	Set Contains: BOERMS712 12
8	BOERMS8	17.8	17.7	6.5	4.0	90	•
9	BOERMS9	19.5	20.0	7.4	4.0	95	•
10	BOERMS10	21.5	21.9	8.0	5.0	100	•
11	BOERMS11	22.0	23.9	8.5	5.5	105	•
12	BOERMS12	23.5	25.0	9.0	5.5	110	•
13	BOERMS13	25.0	25.9	10.0	6.3	115	•
14	BOERMS14	27.0	29.9	10.0	6.5	120	•
15	BOERMS15	28.5	31.1	11.0	7.0	125	•
16	BOERMS16	30.5	33.6	11.0	7.0	128	•
17	BOERMS17	32.0	36.5	12.0	7.0	132	•
18	BOERMS18	34.5	38.5	12.0	8.0	138	•
19	BOERMS19	36.5	38.7	12.9	8.7	142	•

ASME B107.100 Set includes storage tray

BOERS708

Ratcheting Combination, Short Handle, 15° Offset, inches

11	12	A	B	C	D	E	Set Contains: BOERS708 12
5/16	BOERS10	11/16	11/16	1/4	5/32	3 9/16	•
3/8	BOERS12	27/32	7/8	5/16	3/16	3 15/16	•
7/16	BOERS14	7/8	15/16	11/32	7/32	4 1/8	•
1/2	BOERS16	31/32	1 1/32	13/32	1/4	4 1/2	•
9/16	BOERS18	1 1/16	1 3/16	13/32	1/4	4 3/4	•
5/8	BOERS20	1 3/16	1 5/16	7/16	9/32	5 1/16	•
11/16	BOERS22	1 1/4	1 7/16	15/32	9/32	5 3/16	•
3/4	BOERS24	1 7/16	1 17/32	1/2	11/32	5 9/16	•

ASME B107.100 Set includes storage tray



BOERMF712A

Flex-Head Ratcheting Combination, Standard Handle, 15° Offset, mm

- Flex head pivots 90° in either direction to reach hard-to-get fasteners
- Reversible, dual pawl, ratcheting box end yields smooth operation and maximum strength
- 4.5° (5° or smaller wrenches) tooth engagement; less movement to engage the next tooth
- Tough, durable, nickel-chrome finish

Set Contains: BOERMF712A

mm	12	A	B	C	D	E	◯	12
8	BOERMF8A	17.8	17.7	6.5	4.0	142	60	•
9	BOERMF9A	19.5	20.0	7.4	4.0	152	72	•
10	BOERMF10A	21.5	21.9	8.0	5.0	162	72	•
11	BOERMF11A	22.0	23.9	8.5	5.5	172	72	•
12	BOERMF12A	23.5	25.0	9.0	5.5	180	80	•
13	BOERMF13A	25.0	25.9	10.0	6.3	188	80	•
14	BOERMF14A	27.0	29.9	10.0	6.5	196	80	•
15	BOERMF15A	28.5	31.1	11.0	7.0	204	80	•
16	BOERMF16A	30.5	33.6	11.0	7.0	214	80	•
17	BOERMF17A	32.0	36.5	12.0	7.0	228	80	•
18	BOERMF18A	34.5	38.5	12.0	8.0	242	80	•
19	BOERMF19A	36.5	38.7	12.9	8.7	256	80	•

ASME® B107.100 Sets include storage tray

BOERF708A

Flex-Head Ratcheting Combination, Standard Handle, 15° Offset, inches

Set Contains: BOERF708A

	12	A	B	C	D	E	◯	12
5/16	BOERF10A	11/16	11/16	1/4	5/32	5 19/32	72	•
3/8	BOERF12A	27/32	7/8	5/16	3/16	6 3/8	72	•
7/16	BOERF14A	7/8	15/16	11/32	7/32	6 3/4	72	•
1/2	BOERF16A	31/32	1 1/32	13/32	1/4	7 13/32	80	•
9/16	BOERF18A	1 1/16	1 3/16	13/32	1/4	7 23/32	80	
5/8	BOERF20A	1 3/16	1 5/16	7/16	9/32	8 7/16	80	•
11/16	BOERF22A	1 1/4	1 7/16	15/32	9/32	8 31/32	80	•
3/4	BOERF24A	1 7/16	1 17/32	1/2	11/32	10 1/16	80	•

ASME B107.100 Set includes storage tray

BOERMSF712

Flex Head Ratcheting Combination, Midget Handle, 15° Offset, mm

Set Contains: BOERMSF712

mm	12	A	B	C	D	E	12
8	BOERMSF8	17.8	17.7	6.5	4.0	94	•
9	BOERMSF9	19.5	20.0	7.4	4.0	98	•
10	BOERMSF10	21.5	21.9	8	5	103	•
11	BOERMSF11	22	23.9	8.5	5.5	108	•
12	BOERMSF12	23.5	25	9	5.5	111	•
13	BOERMSF13	25	25.9	10	6.3	115	•
14	BOERMSF14	27	29.9	10	6.5	120	•
15	BOERMSF15	28.5	31.1	11	7	124	•
16	BOERMSF16	30.5	33.6	11	7	128	•
17	BOERMSF17	32	36.5	12	7	133	•
18	BOERMSF18	34.5	38.5	12	8	140	•
19	BOERMSF19	36.5	38.7	12.9	8.7	147	•

ASME B107.100 Set includes kit bag

BOERSF708

Flex Head Ratcheting Combination, Midget Handle, 15° Offset, inches

Set Contains: BOERSF708

	12	A	B	C	D	E	12
5/16	BOERSF10	11/16	11/16	1/4	5/32	3 11/16	•
3/8	BOERSF12	27/32	7/8	5/16	3/16	4 1/16	•
7/16	BOERSF14	7/8	15/16	11/32	7/32	4 1/4	•
1/2	BOERSF16	31/32	1 1/32	13/32	1/4	4 17/32	•
9/16	BOERSF18	1 1/16	1 3/16	13/32	1/4	4 23/32	•
5/8	BOERSF20	1 3/16	1 5/16	7/16	9/32	5 1/32	•
11/16	BOERSF22	1 1/4	1 7/16	15/32	9/32	5 1/4	•
3/4	BOERSF24	1 7/16	1 17/32	1/2	11/32	5 25/32	•

ASME B107.100 Set includes kit bag

⚠WARNING

- Do not use "cheater bars" on handles
- Read safety precautions on pages W1 to W4

RATCHETING WRENCH ADAPTORS

RWA2

Ratcheting Combination Wrench Adaptors

- Converts ratcheting wrench into a ratchet
- Use with reversible ratcheting box wrenches such as the SOEXRM, BOERM, BOERMF and BOERMS series
- Can be used with the combination ratcheting box wrenches such as the OEXRM and OXIRM series
- Use reverse lever on wrench to secure or remove adaptor from wrench
- Push button on adaptor to release socket

Stock No.	Configuration	Use with Ratcheting Wrench Size
RWA1	1/4" Drive	13 mm
RWA2	3/8" Drive	16 mm
RWA3	1/2" Drive	19 mm
RWA4	1/4" Hex	13 mm
RWA1FR	1/4" Drive	1/2"
RWA2FR	3/8" Drive	5/8"
RWA3FR	1/2" Drive	3/4"
RWA4FR	1/4" Hex	1/2"

FLANK DRIVE® HIGH PERFORMANCE RATCHETING BOX

XDHRM606



XDHR705

Ratcheting Box, mm

mm	12	A	B	C	D	E	Set Contains: XDHRM604	Set Contains: XDHRM606
8	XDHRM8	17.9	11.5	7.1	6.4	230.6		
9	XDHRM9	19.4	13.0	7.9	6.4	243.7		
10	XDHRM10	21.5	14.4	8.3	6.3	256.5	•	
11	XDHRM11	21.4	15.5	8.7	8.7	269.5		•
12	XDHRM12	23.4	17.1	9.1	9.1	282.6		•
13	XDHRM13	25.0	18.7	10.2	7.5	295.4	•	
14	XDHRM14	27.0	20.2	10.3	10.3	336.6		•
15	XDHRM15	28.5	21.5	11.1	8.8	349.3	•	
16	XDHRM16	30.6	22.6	11.1	11.1	362.3		•
17	XDHRM17	32.0	23.7	12.0	9.0	375.2	•	
18	XDHRM18	34.5	25.0	11.9	12.3	388.1		•
19	XDHRM19	36.5	26.2	12.7	12.3	401.2		•

Set includes kit bag

Ratcheting Box, inches

	12	A	B	C	D	E	Set Contains: XDHR705
5/16	XDHR10	45/64	1/4	9/32	29/64	9 5/64	
3/8	XDHR12	27/32	9/16	21/64	19/64	10 3/32	•
7/16	XDHR14	27/32	39/64	11/32	11/32	10 39/64	•
1/2	XDHR16	63/64	23/32	13/32	23/64	11 5/8	•
9/16	XDHR18	1 1/16	13/16	13/32	13/32	13 1/4	•
5/8	XDHR20	1 13/64	7/16	7/16	57/64	14 17/64	
11/16	XDHR22	1 17/64	7/16	15/32	15/16	14 49/64	
3/4	XDHR24	1 7/16	1 3/64	1/2	31/64	15 51/64	•

Set includes kit bag

RATCHETING BOX

Snap-on® spline wrenching tools have been developed to service high tensile strength spline nuts and bolts widely used on both military and commercial aircraft. Precise, radial spline teeth engage the fastener teeth over a wider area to minimize stress, and allow application of high torque to reduce risk of damage to the fastener or to the tool.

Chrome tools comply with Military Spec. MS-33787 and MIL-W-8982. The unique spline wrenching configuration can also be used on ordinary six- and 12-point fasteners with an advantage similar to the *Snap-on Flank Drive* wrenching system.

RES2630A

Spline, inches

		Stock No.	A	C	E	Number of Gear Teeth
#8–#10	1/4–5/16	RES810C	9/16–5/8	11/32	4 11/16	16–18
#12–#14	3/8–7/16	RES1214C	3/4–7/8	11/32	6 5/32	20–22
#18–#20	9/16–5/8	RES1820C	1 1/8–1 1/4	13/32	7 27/32	20–22
#26–#30	13/16–15/16	RES2630C	1 1/2–1 9/16	7/16	9 25/32	22–22

RBM1213C

RB604C

Standard Handle, 0° Offset, mm

mm	6	12	A	C	E
7–8	RBM78SC	RBM78C	15.1–17.1	9.5	114.3
8–10	–	RBM810C	20.2–22.6	9.5	139.7
9–10	–	RBM910C	20.2–22.6	9.5	139.7
10–11	RBM1011SC	RBM1011C	25.8–29.4	12.7	174.6
10–12	–	RBM1012C	25.8–29.4	12.7	174.6
12–13	RBM1213SC	RBM1213C	25.8–29.4	12.7	174.6
12–14	–	RBM1214C	25.8–29.4	12.7	174.6
14–15	–	RBM1415C	32.9–36.5	12.7	206.4
16–18	–	RBM1618C	32.9–36.5	12.7	206.4
17–19	–	RBM1719C	32.9–36.5	12.7	206.4

Standard Handle, 0° Offset, inches

Set Contains: RB604C

	6	12	A	C	E	12
1/4–5/16	R810SC	R810C	19/32–43/64	3/8	4 1/2	
5/16–11/32	–	R1011C	5/8–3/4	11/32	5 3/8	
5/16–3/8	–	R1012C	51/64–57/64	3/8	5 1/2	
3/8–7/16	R1214SC	R1214C	51/64–57/64	3/8	5 1/2	•
1/2–9/16	R1618SC	R1618C	1 1/64–1 5/32	1/2	6 7/8	•
5/8–11/16	–	R2022C	1 19/64–1 7/16	1/2	8 1/8	•
5/8–3/4	–	R2024C	1 19/64–1 7/16	1/2	8 1/8	
3/4–13/16	–	R2426C	1 13/32–1 37/64	1/2	9 1/4	
3/4–7/8	–	R2428C	1 13/32–1 37/64	1/2	9 1/4	•
13/16–15/16	–	R2630C	1 13/32–1 37/64	1/2	9 1/4	
7/8–15/16	–	R2830C	1 29/32–2 17/64	9/16	15	
15/16–1	–	R3032C	1 29/32–2 17/64	9/16	15	
1 1/16–1 1/8	–	R3436A	2–2	9/16	12 3/4	
1 1/8–1 1/4	R3640SA	–	2 3/32–2 3/32	9/16	12 13/16	
1 3/16-1 1/4	–	R3840A	2–2	9/16	12 3/4	

Set includes storage tray



RTBM605

RTB607

T-Handle, mm

Set Contains: RTBM605 / RTBM505

mm	12	A	B	C	D	12	12
8	RTBM8	17.5	71.4	307.2	9.5	•	
10	RTBM10	23.0	76.2	307.2	9.5	•	
12	RTBM12	29.4	86.5	308.8	12.7	•	
13	RTBM13	29.4	86.5	308.8	12.7	•	
14	RTBM14	29.4	86.5	308.8	12.7	•	
15	RTBM15	36.8	98.6	308.8	12.7		•
16	RTBM16	36.8	98.6	308.8	12.7		•
17	RTBM17	36.8	98.6	308.8	12.7		•
18	RTBM18	36.8	98.6	308.8	12.7		•
19	RTBM19	36.8	98.6	308.8	12.7		•

Sets include storage tray

T-Handle, inches

Set Contains: RTB607

	12	A	B	C	D	12
1/4	RTB8	11/16	2 13/16	12 3/32	3/8	•
5/16	RTB10	11/16	2 13/16	12 3/32	3/8	•
11/32	RTB11	29/32	3	12 3/32	3/8	•
3/8	RTB12	29/32	3	12 3/32	3/8	•
7/16	RTB14	29/32	3	12 3/32	3/8	•
1/2	RTB16	1 5/32	3 13/32	12 5/32	1/2	•
9/16	RTB18	1 5/32	3 13/32	12 5/32	1/2	•

Set includes storage tray

⚠WARNING

- Do not use "cheater bars" on handles
- Read safety precautions on pages W1 to W4

RATCHETING BOX Blue-Point®

BXORM706

Standard Handle, 25° Offset, Reversible, mm

Set Contains: BXORM706

mm	12	A	C	E	12
8–9	BXORM89	18.0–19.3	6.4–7.6	184.2	•
10–11	BXORM1011	21.8–22.1	8.1–8.6	203.2	•
12–13	BXORM1213	23.6–24.6	8.9–10.2	222.3	•
14–15	BXORM1415	27.2–28.7	10.2–10.9	241.3	•
16–17	BXORM1617	31.0–32.0	10.9–11.9	260.4	•
18–19	BXORM1819	34.5–36.8	12.2–13.2	279.4	•

Set includes storage tray

RBYAM605

Standard Handle, 25° Offset, mm

Set Contains: RBYAM605

mm	12	A	C	E	12
7–8	RYAM78	15.5–16.3	9.5	105.2	•
9–10	RYAM910	19.8–22.6	9.5	134.5	•
11–12	RYAM1112	25.4–29	12.7	165.9	•
13–14	RYAM1314	25.4–29	12.7	165.9	•
15–17	RYAM1517	33–36.5	12.7	197.2	•
16–18	RYAM1618	33–36.5	12.7	197.2	
19–21	RYAM1921	35.7–40.1	12.7	224.2	

Set includes storage tray

RBZM605

Latch-on®, 0° Offset, mm

- *Latch-on* head keeps wrench on fastener
- Ring prevents nut/fastener head from sliding through wrench

Set Contains: RBZM605

mm	12	A	C	E	12
7–8	RBZM78	15.1–17.1	9.5	114.3	•
9–10	RBZM910	20.4–22.6	9.5	140.3	•
11–12	RBZM1112	25.8–29.4	12.7	174.6	•
13–14	RBZM1314	25.8–29.4	12.7	174.6	•
15–17	RBZM1517	32.9–36.5	12.7	206.4	•
16–18	RBZM1618	32.9–36.5	12.7	206.4	
19–21	RBZM1921	35.7–40.1	12.7	234.9	

Set includes storage tray

BXOR704

Standard Handle, 25° Offset, Reversible, inches

Set Contains: BXOR704

	12	A	C	E	12
5/16–3/8	BXOR1012	23/32–7/8	1/4–5/16	7 1/2	•
7/16–1/2	BXOR1416	7/8–31/32	11/32–13/32	8 3/4	•
9/16–5/8	BXOR1820	1 1/16–1 7/32	13/32–7/16	9 3/4	•
11/16–3/4	BXOR2224	1 9/32–1 7/16	15/32–1/2	11	•

Set includes storage tray



RBYA605

Standard Handle, 25° Offset, inches

Set Contains: RBYA605

	12	A	C	E	12
1/4–5/16	RYA810	9/16–5/8	11/32	4 9/32	•
5/16–11/32	RYA1011	19/32–11/16	3/8	4 1/32	
3/8–7/16	RYA1214	3/4–7/8	11/32	6 5/32	•
1/2–9/16	RYA1618	15/16–1	13/32	6 31/32	•
5/8–11/16	RYA2022	1 1/8–1 1/4	13/32	7 27/32	•
3/4–7/8	RYA2428	1 3/8–1 1/2	7/16	8 5/8	•

Set includes storage tray

RBZ605

Latch-on, 0° Offset, inches

- *Latch-on* head keeps wrench on fastener
- Ring prevents nut/fastener head from sliding through wrench

Set Contains: RBZ605

	12	A	C	E	12
1/4–5/16	RBZ810	19/32–11/16	3/8	4 1/2	•
3/8–7/16	RBZ1214	13/16–29/32	3/8	5 1/2	•
1/2–9/16	RBZ1618	1 1/32–1 5/32	1/2	6 7/8	•
5/8–11/16	RBZ2022	1 5/16–1 7/16	1/2	8 1/8	•
3/4–7/8	RBZ2428	1 13/32–1 19/32	1/2	9 1/4	•

Set includes storage tray

LOCKING FLEX-HEAD REVERSIBLE RATCHETING BOX Blue-Point®

BOERMFLCG712

BOERFLCG708

Locking Flex Head Ratcheting Box/Cushion Grip, mm

mm	12	A	B	C	D	12 (Set Contains: BOERMFLCG712)
8	BOERMFLCG8	17.8	6.55	32	228	•
9	BOERMFLCG9	19.5	7.45	34	229	•
10	BOERMFLCG10	21.5	8.05	38	233	•
11	BOERMFLCG11	22	8.55	40	235	•
12	BOERMFLCG12	23.5	9.05	42	285	•
13	BOERMFLCG13	25	10.05	45	287	•
14	BOERMFLCG14	27	10.05	48	289	•
15	BOERMFLCG15	28.5	11.05	52	293	•
16	BOERMFLCG16	30.5	11.05	54	347	•
17	BOERMFLCG17	32	12.05	56	348	•
18	BOERMFLCG18	34.5	12.05	60	352	•
19	BOERMFLCG19	36.5	12.95	64	354	•

ASME® B107.100 Set includes kit bag

Locking Flex Head Ratcheting Box/Cushion Grip, inches

11	12	A	B	C	D	12 (Set Contains: BOERFLCG708)
5/16	BOERFLCG10	23/32	1/4	1 1/4	9	•
3/8	BOERFLCG12	27/32	5/16	1 1/2	9 1/4	•
7/16	BOERFLCG14	7/8	11/32	1 9/16	9 19/32	•
1/2	BOERFLCG16	31/32	13/32	1 25/32	11 9/32	•
9/16	BOERFLCG18	1 1/16	13/32	1 29/32	11 3/8	•
5/8	BOERFLCG20	1 7/32	7/16	2 1/8	13 21/32	•
11/16	BOERFLCG22	1 1/4	15/32	2 7/32	13 23/32	•
3/4	BOERFLCG24	1 7/16	1/2	2 17/32	13 15/16	•

ASME B107.100 Set includes kit bag

FLANK DRIVE® PLUS COMBINATION

Snap-on® *Flank Drive* Plus combination wrenches exceed the limits of any other open end design. The open end features a series of flutes or notches that grip a fastener away from its corners much like our box ends do. Force is directed away from the weaker corners of the nut and directed to the stronger flats.



Standard Handle, mm

mm	12	A	B	C	D	E	12 (Set Contains: SOEXM710)	12 (SOEXM707)	12 (SOEXM705)
7	SOEXM7	11	15	5	4	135			
8	SOEXM8	13	17	6	4	146			
9	SOEXM9	14	19	6	5	159			
10	SOEXM10	15	21	7	5	171	•	•	
11	SOEXM11	17	23	8	6	184	•	•	
12	SOEXM12	18	25	8	6	195	•	•	
13	SOEXM13	20	27	9	6	207	•	•	
14	SOEXM14	21	29	9	7	219	•	•	
15	SOEXM15	22	31	10	7	231	•	•	
16	SOEXM16	24	33	10	7	242	•		
17	SOEXM17	25	35	11	8	255	•	•	
18	SOEXM18	27	37	12	8	267	•		
19	SOEXM19	28	39	12	9	279	•		
20	SOEXM20	30	41	13	9	292			•
21	SOEXM21	31	43	13	9	304			•
22	SOEXM22	33	46	14	10	318			•
23	SOEXM23	34	47	14	10	327			•
24	SOEXM24	35	49	15	11	337			•
25	SOEXM25	37	52	16	11	356			

ASME B107.100 Sets include storage tray

SOEXM710

WARNING

• Do not use "cheater bars" on handles
• Read safety precautions on pages W1 to W4

FLANK DRIVE® PLUS COMBINATION

Selection, convenience and quality. *Flank Drive* Plus combination wrenches are available in many different styles and sizes. Just like all Snap-on® wrenches, they are sized for optimum comfort and balance in your hand.

Tough, durable, nickel-chrome plating produces a mirror-like finish that helps protect against corrosion and makes it easy to wipe the wrenches clean.



Standard Handle, inches

SOEX710

Set Contains:							SOEX710	SOEX707	SOEX703K1	SOEX704
	12	A	B	C	D	E	12	12	12	12
1/4	SOEX8	13/32	17/32	3/16	5/32	5				
5/16	SOEX10	1/2	21/32	7/32	5/32	5 3/4	•			
11/32	SOEX11	17/32	23/32	1/4	3/16	6 1/8				
3/8	SOEX12	19/32	25/32	1/4	3/16	6 1/2	•	•		
7/16	SOEX14	21/32	29/32	9/32	7/32	7 1/4	•	•		
1/2	SOEX16	3/4	1 1/16	11/32	1/4	8	•	•		
9/16	SOEX18	27/32	1 5/32	3/8	9/32	8 3/4	•	•		
5/8	SOEX20	15/16	1 5/16	13/32	9/32	9 1/2	•	•		
11/16	SOEX22	1 1/32	1 13/32	7/16	5/16	10 1/4	•	•		
3/4	SOEX24	1 1/8	1 9/16	15/32	11/32	11	•	•		
13/16	SOEX26	1 3/16	1 21/32	17/32	3/8	11 3/4	•			
7/8	SOEX28	1 9/32	1 13/16	9/16	3/8	12 1/2	•			
15/16	SOEX30	1 3/8	1 29/32	19/32	13/32	13 1/4				•
1	SOEX32	1 15/32	2 1/32	5/8	7/16	14				•
1 1/16	SOEX34	1 9/16	2 5/32	19/32	15/32	14 3/4				•
1 1/8	SOEX36	1 5/8	2 5/16	11/16	15/32	15 17/32				•
1 3/16	SOEX38	1 23/32	2 13/32	23/32	1/2	16 1/4			•	
1 1/4	SOEX40	1 13/16	2 9/16	3/4	17/32	17			•	
1 5/16	SOEX42	1 29/32	2 21/32	3/4	9/16	17 25/32			•	

ASME® B107.100

Sets include storage tray

Long Handle, mm

SOEXLM710B

Set Contains:							SOEXLM710B
mm	12	A	B	C	D	E	12
10	SOEXLM10B	15	21	7	5	186	•
11	SOEXLM11B	17	23	8	6	204	•
12	SOEXLM12B	18	25	8	6	218	•
13	SOEXLM13B	20	27	9	6	234	•
14	SOEXLM14B	21	29	9	7	250	•
15	SOEXLM15B	22	31	10	7	266	•
16	SOEXLM16B	24	33	10	7	280	•
17	SOEXLM17B	25	35	11	8	298	•
18	SOEXLM18B	27	37	12	8	214	•
19	SOEXLM19B	28	39	12	9	331	•

Long Handle, inches

SOEXL707B

							SOEXL707B
	12	A	B	C	D	E	12
3/8	SOEXL12B	19/32	25/32	1/4	3/16	7	•
7/16	SOEXL14B	21/32	29/32	9/32	7/32	8	•
1/2	SOEXL16B	3/4	1 1/16	11/32	1/4	9	•
9/16	SOEXL18B	27/32	1 5/32	3/8	9/32	10	•
5/8	SOEXL20B	15/16	1 5/16	13/32	9/32	11	•
11/16	SOEXL22B	1 1/32	1 13/32	7/16	5/16	12	•
3/4	SOEXL24B	1 1/8	1 9/16	15/32	11/32	13	•
13/16	SOEXL26B	1 3/16	1 21/32	17/32	3/8	14	
7/8	SOEXL28B	1 9/32	1 13/16	9/16	3/8	15	
15/16	SOEXL30B	1 3/8	1 29/32	19/32	13/32	16	
1	SOEXL32B	1 15/32	2 1/32	5/8	7/16	17	

FLANK DRIVE® PLUS COMBINATION



Short Handle, mm

mm	12	A	B	C	D	E
10	SOEXM100	15	21	7	5	133
11	SOEXM110	17	23	8	6	138
12	SOEXM120	18	25	8	6	143
13	SOEXM130	20	27	9	6	148
14	SOEXM140	21	29	9	7	152
15	SOEXM150	22	31	10	7	157
17	SOEXM170	25	35	11	8	167

SOEXM150

FLANK DRIVE COMBINATION

OSHM713

OSHM707B

OEXM713B

OEXM710B

OEXM707B

OEXM706

Standard Handle, Chrome, mm

								Set Contains:	OSHM713	OSHM707B*	OEXM725	OEXM723K	OEXM713B*	OEXM710B*	OEXM707B*	OEXM705	OEXM706
mm	6	12	A	B	C	D	E		6	6	12	12	12	12	12	12	12
7	OSHM70B	–	11	15	5	4	135		•								
8	OSHM80B	OEXM80B	13	17	6	4	146		•		•	•					
9	OSHM90B	OEXM90B	14	19	6	5	159		•		•	•					
10	OSHM100B	OEXM100B	15	21	7	5	171		•	•	•	•	•	•	•		
11	OSHM110B	OEXM110B	17	23	8	6	184		•	•	•	•	•	•	•		
12	OSHM120B	OEXM120B	18	25	8	6	195		•	•	•	•	•	•	•		
13	OSHM130B	OEXM130B	20	27	9	6	207		•	•	•	•	•	•	•		
14	OSHM140B	OEXM140B	21	29	9	7	219		•	•	•	•	•	•	•		
15	OSHM150B	OEXM150B	22	31	10	7	231		•	•	•	•	•	•	•		
16	OSHM160B	OEXM160B	24	33	10	7	242		•		•	•	•	•			
17	OSHM170B	OEXM170B	25	35	11	8	255		•	•	•	•	•	•	•		
18	OSHM180B	OEXM180B	27	37	12	8	267		•		•	•	•	•			
19	OSHM190B	OEXM190B	28	39	12	9	279		•		•	•	•	•			
20	–	OEXM200B	30	41	13	9	292				•	•	•			•	
21	–	OEXM210B	31	43	13	9	304				•	•	•			•	
22	–	OEXM220B	33	46	14	10	318				•	•	•			•	
23	–	OEXM230B	34	47	14	10	327				•	•				•	
24	–	OEXM240B	35	49	15	11	337				•	•				•	
25	–	OEXM250B	37	52	16	11	356				•	•					•
26	–	OEXM260B	38	53	16	11	363				•	•					•
27	–	OEXM270B	39	55	17	12	375				•	•					•
28	–	OEXM280B	40	56	17	12	375										•
29	–	OEXM290B	42	58	18	12	394				•	•					•
30	–	OEXM300B	44	61	19	13	413				•	•					•
32	–	OEXM320B	46	65	19	14	432				•	•					
34	–	OEXM340B	48	68	19	14	452				•						
36	–	OEXM360B	53	74	22	15	489				•						
Kit Bag												C2301A					

ASME®/ANSI® B107.100

*Set includes storage tray

WARNING

- Do not use "cheater bars" on handles
- Read safety precautions on pages W1 to W4

FLANK DRIVE® COMBINATION



OSH711B

OEX704B

OEX707B

Standard Handle, Chrome, inches

Set Contains:	OSH711B*	OSH707B*	OEX724K	OEX714K	OEX710*	OEX711B*	OEX709B*	OEX707B*	OEX703K1	OEX703K2	OEX704B
	6	6	12	12	12	12	12	12	12	12	12

			A	B	C	D	E										
1/4	–	OEX8B	13/32	17/32	3/16	5/32	5			•							
5/16	OSH10B	OEX10B	1/2	21/32	7/32	5/32	5 3/4			•		•					
11/32	OSH11B	OEX11B	17/32	3/4	1/4	3/16	6 1/8			•							
3/8	OSH12B	OEX12B	19/32	13/16	5/16	3/16	6 1/2	•	•	•	•	•	•	•	•		
7/16	OSH14B	OEX14B	21/32	29/32	5/16	7/32	7 1/4	•	•	•	•	•	•	•	•		
1/2	OSH16B	OEX16B	3/4	1 1/16	11/32	1/4	8	•	•	•	•	•	•	•	•		
9/16	OSH18B	OEX18B	27/32	1 3/16	3/8	9/32	8 3/4	•	•	•	•	•	•	•	•		
5/8	OSH20B	OEX20B	15/16	1 5/16	13/32	9/32	9 1/2	•	•	•	•	•	•	•	•		
11/16	OSH22B	OEX22B	1 1/32	1 13/32	7/16	5/16	10 1/4	•	•	•	•	•	•	•	•		
3/4	OSH24B	OEX24B	1 1/8	1 9/16	15/32	11/32	11	•	•	•	•	•	•	•	•		
13/16	OSH26B	OEX26B	1 3/16	1 21/32	17/32	3/8	11 3/4	•		•	•	•	•	•			
7/8	OSH28B	OEX28B	1 9/32	1 13/16	9/16	3/8	12 1/2	•		•	•	•	•	•			
15/16	OSH30B	OEX30B	1 3/8	1 29/32	19/32	13/32	13 1/4	•		•	•		•				•
1	OSH32B	OEX32B	1 15/32	2 1/32	21/32	7/16	14	•		•	•		•				•
1 1/16	–	OEX34B	1 9/16	2 3/16	11/16	15/32	14 3/4			•	•						•
1 1/8	–	OEX36B	1 5/8	2 5/16	11/16	17/32	15 7/16			•	•						•
1 3/16	–	OEX38B	1 3/4	2 7/16	3/4	1/2	16 5/16			•						•	
1 1/4	–	OEX40B	1 13/16	2 9/16	3/4	17/32	17 1/16			•	•					•	
1 5/16	–	OEX42B	1 29/32	2 21/32	3/4	9/16	17 13/16			•						•	
1 3/8	–	OEX44B	2	2 13/16	3/4	19/32	18 9/16			•							•
1 7/16	–	OEX46B	2 1/16	2 29/32	7/8	19/32	19 1/32			•							•
1 1/2	–	OEX48B	2 5/32	3 1/16	7/8	5/8	20 1/16			•							•
1 9/16	–	OEX50B	2 1/4	3 3/16	7/8	23/32	20 13/16			•							
1 5/8	–	OEX52B	2 11/32	3 11/32	7/8	11/16	21 9/16			•							
1 11/16	–	OEX54A	2 7/16	3 13/32	7/8	23/32	22 9/32										
1 3/4	–	OEX56A	2 17/32	3 9/16	1 1/32	23/32	22 7/8										
1 13/16	–	OEX58A	2 5/8	3 21/32	1 1/32	3/4	23 15/32										
1 7/8	–	OEX60A	2 11/32	3 13/16	1 1/32	25/32	24 1/32										
2	–	OEX64A	2 7/8	4 1/16	1 1/32	27/32	25 1/4										
		Kit Bag								C2301A	C1401						

ASME® B107.100
OEX32B – OEX52B are full polish chrome. OEX54A – OEX64A are satin finish chrome.

*Set includes storage tray



Standard Handle, Industrial, mm

mm	12	A	B	C	D	E	Set Contains: GOEXM715 — 12
10	GOEXM100B	15	21	7	5	171	•
11	GOEXM110B	17	23	8	6	184	•
12	GOEXM120B	18	25	8	6	195	•
13	GOEXM130B	20	27	9	6	207	•
14	GOEXM140B	21	29	9	7	219	•
15	GOEXM150B	22	31	10	7	231	•
16	GOEXM160B	24	33	10	7	242	•
17	GOEXM170B	25	35	11	8	255	•
18	GOEXM180B	27	37	12	8	267	•
19	GOEXM190B	28	39	12	9	279	•
20	GOEXM200B	30	41	13	9	292	•
21	GOEXM210B	31	43	13	10	304	•
22	GOEXM220B	33	46	14	10	318	•
23	GOEXM230B	34	47	14	10	327	•
24	GOEXM240B	35	49	15	11	337	•
27	GOEXM270B	39	55	17	12	375	

ASME®/ANSI® B107.100

Set includes storage tray

GOEXM150B

GOEXM715

GOEX722K

GOEX711B

Standard Handle, Industrial, inches

11	12	A	B	C	D	E	Set Contains: GOEX722K — 12	GOEX714K — 12	GOEX711B* — 12	GOEX707B* — 12
5/16	GOEX10B	1/2	21/32	7/32	5/32	5 3/4	•			
3/8	GOEX12B	19/32	13/16	5/16	3/16	6 1/2	•	•	•	•
7/16	GOEX14B	21/32	29/32	5/16	7/32	7 1/4	•	•	•	•
1/2	GOEX16B	3/4	1 1/16	11/32	1/4	8	•	•	•	•
9/16	GOEX18B	27/32	1 3/16	3/8	9/32	8 3/4	•	•	•	•
5/8	GOEX20B	15/16	1 5/16	13/32	9/32	9 1/2	•	•	•	•
11/16	GOEX22B	1 1/32	1 13/32	7/16	5/16	10 1/4	•	•	•	•
3/4	GOEX24B	1 1/8	1 9/16	15/32	11/32	11	•	•	•	•
13/16	GOEX26B	1 3/16	1 21/32	17/32	3/8	11 3/4	•	•	•	
7/8	GOEX28B	1 9/32	1 13/16	9/16	3/8	12 1/2	•	•	•	
15/16	GOEX30B	1 3/8	1 29/32	19/32	13/32	13 1/4	•	•	•	
1	GOEX32B	1 15/32	2 1/32	21/32	7/16	14	•	•	•	
1 1/16	GOEX34B	1 9/16	2 3/16	11/16	15/32	14 3/4	•	•		
1 1/8	GOEX36B	1 5/8	2 5/16	11/16	17/32	15 7/16	•	•		
1 3/16	GOEX38B	1 3/4	2 7/16	3/4	1/2	16 5/16	•			
1 1/4	GOEX40B	1 13/16	2 9/16	3/4	17/32	17 1/16	•	•		
1 5/16	GOEX42B	1 29/32	2 21/32	3/4	9/16	17 13/16	•			
1 3/8	GOEX44B	2	2 13/16	3/4	19/32	18 9/16	•			
1 7/16	GOEX46B	2 1/16	2 29/32	7/8	19/32	19 1/32	•			
1 1/2	GOEX48B	2 5/32	3 1/16	7/8	5/8	20 1/16	•			
1 9/16	GOEX50B	2 1/4	3 3/16	7/8	23/32	20 13/16	•			
1 5/8	GOEX52B	2 11/32	3 11/32	7/8	11/16	21 9/16	•			
	Kit Bag						C2200	C1401		

ASME B107.100

*Set includes storage tray

11	12	A	B	C	D	E
1 3/4	GOEX56A	2 17/32	3 9/16	1 1/32	23/32	22 7/8
1 13/16	GOEX58A	2 5/8	3 21/32	1 1/32	3/4	23 15/32
1 7/8	GOEX60A	2 11/32	3 13/16	1 1/32	25/32	24 1/32
2	GOEX64A	2 7/8	4 1/16	1 1/32	27/32	25 1/4
2 1/16	GOEX66A	2 31/32	4 5/32	1 1/8	27/32	25 25/32
2 1/8	GOEX68A	3 1/16	4 5/16	1 5/32	7/8	26 3/8
2 3/16	GOEX70A	3 1/8	4 13/32	1 1/8	7/8	26 31/32
2 1/4	GOEX72A	3 7/32	4 9/16	1 1/8	15/16	27 9/16
2 3/8	GOEX76A	3 13/32	4 13/16	1 9/32	31/32	28 3/4
2 1/2	GOEX80A	3 19/32	5 1/16	1 9/32	1	29 29/32
2 5/8	GOEX84A	4 7/8	6 5/8	1 5/8	1 3/16	32
2 3/4	GOEX88A	4 7/8	6 5/8	1 5/8	1 3/16	32
2 7/8	GOEX92A	4 7/8	6 5/8	1 5/8	1 3/16	32
2 15/16	GOEX94A	4 7/8	6 5/8	1 5/8	1 3/16	32
3	GOEX96A	4 7/8	6 5/8	1 5/8	1 3/16	32
3 1/8	GOEX1100A	4 7/8	6 5/8	1 5/8	1 3/16	32
3 3/8	GOEX1108A	4 7/8	6 5/8	1 5/8	1 3/16	32
3 1/2	GOEX1112A	4 7/8	6 5/8	1 5/8	1 3/16	32

⚠WARNING

- Do not use "cheater bars" on handles
- Read safety precautions on pages W1 to W4

FLANK DRIVE® COMBINATION



OEXLM710B

OEXL707B

Long Handle, mm

Set Contains: OEXLM710B

mm	12	A	B	C	D	E	12
10	**OEXLM10B**	15	21	7	5	186	•
11	**OEXLM11B**	17	23	8	6	203	•
12	**OEXLM12B**	18	25	8	6	218	•
13	**OEXLM13B**	20	27	9	6	234	•
14	**OEXLM14B**	21	29	9	7	250	•
15	**OEXLM15B**	22	31	10	7	266	•
16	**OEXLM16B**	24	33	10	7	282	•
17	**OEXLM17B**	25	35	11	8	298	•
18	**OEXLM18B**	27	37	12	8	314	•
19	**OEXLM19B**	28	39	12	9	330	•

ASME® B107.100

Set includes storage tray

Long Handle, inches

Set Contains: OEXL707B

11	12	A	B	C	D	E	12
3/8	**OEXL12B**	19/32	25/32	1/4	3/16	7	•
7/16	**OEXL14B**	21/32	29/32	5/16	7/32	8	•
1/2	**OEXL16B**	3/4	1 1/16	11/32	1/4	9	•
9/16	**OEXL18B**	27/32	1 5/32	3/8	9/32	10	•
5/8	**OEXL20B**	15/16	1 5/16	13/32	9/32	11	•
11/16	**OEXL22B**	1 1/32	1 13/32	7/16	5/16	12	•
3/4	**OEXL24B**	1 1/8	1 9/16	15/32	11/32	13	•
13/16	**OEXL26B**	1 3/16	1 21/32	17/32	3/8	14	
7/8	**OEXL28B**	1 9/32	1 13/16	9/16	3/8	15	
15/16	**OEXL30B**	1 3/8	1 29/32	19/32	13/32	16	
1	**OEXL32B**	1 15/32	2 1/32	5/8	7/16	17	

ASME B107.100

Set includes storage tray

GOEXM17B

OEXSM710B

Short Handle, mm

Set Contains: OEXSM719 / OEXSM714K / OEXSM710B*

mm	12	12	A	B	C	D	E	12	12	12
6	**OEXM6B**	**GOEXM6B**	10	13	5	4	113	•	•	
7	**OEXM7B**	**GOEXM7B**	11	15	5	4	118	•	•	
8	**OEXM8B**	**GOEXM8B**	13	17	6	4	123	•	•	
9	**OEXM9B**	**GOEXM9B**	14	19	6	5	128	•	•	
10	**OEXM10B**	**GOEXM10B**	15	21	7	5	133	•	•	•
11	**OEXM11B**	**GOEXM11B**	17	23	8	6	138	•	•	•
12	**OEXM12B**	**GOEXM12B**	18	25	8	6	142	•	•	•
13	**OEXM13B**	**GOEXM13B**	20	27	9	6	148	•	•	•
14	**OEXM14B**	**GOEXM14B**	21	29	9	7	152	•	•	•
15	**OEXM15B**	**GOEXM15B**	22	31	10	7	157	•	•	•
16	**OEXM16B**	**GOEXM16B**	24	33	10	7	162	•	•	•
17	**OEXM17B**	**GOEXM17B**	25	35	11	8	167	•	•	•
18	**OEXM18B**	**GOEXM18B**	27	37	12	8	172	•	•	•
19	**OEXM19B**	**GOEXM19B**	28	39	12	9	177	•	•	•
20	**OEXM20B**	–	30	41	13	9	182	•		
21	**OEXM21B**	–	31	43	13	9	186	•		
22	**OEXM22B**	–	33	46	14	10	192	•		
23	**OEXM23B**	–	34	47	14	10	197	•		
24	**OEXM24B**	–	35	49	15	11	201	•		
	Kit Bag								**C1402**	

ASME B107.100

*Set includes storage tray



Short Handle, inches

Set Contains:								OEXS721	OEXS715K	OEXS709B*
11	12	12	A	B	C	D	E	12	12	12
1/4	OEX080B	GOEX080B	13/32	17/32	3/16	5/32	4 17/32	•	•	
9/32	OEX090B	–	7/16	19/32	7/32	5/32	4 21/32	•	•	
5/16	OEX100B	GOEX100B	1/2	21/32	7/32	5/32	4 27/32	•	•	•
11/32	OEX110B	GOEX110B	17/32	23/32	1/4	3/16	5	•	•	•
3/8	OEX120B	GOEX120B	19/32	25/32	1/4	3/16	5 1/8	•	•	•
7/16	OEX140B	GOEX140B	21/32	29/32	5/16	7/32	5 7/16	•	•	•
1/2	OEX160B	GOEX160B	3/4	1 1/16	11/32	1/4	5 3/4	•	•	•
9/16	OEX180B	GOEX180B	27/32	1 5/32	3/8	9/32	6 1/16	•	•	•
5/8	OEX200B	GOEX200B	15/16	1 5/16	13/32	9/32	6 11/32	•	•	•
11/16	OEX220B	GOEX220B	1 1/32	1 13/32	7/16	5/16	6 21/32	•	•	•
3/4	OEX240B	GOEX240B	1 1/8	1 9/16	15/32	11/32	6 31/32	•	•	•
13/16	OEX260B	GOEX260B	1 3/16	1 21/32	17/32	3/8	7 9/32	•	•	
7/8	OEX280B	GOEX280B	1 9/32	1 13/16	9/16	3/8	7 9/16	•	•	
15/16	OEX300B	GOEX300B	1 3/8	1 29/32	19/32	13/32	7 7/8	•	•	
1	OEX320B	GOEX320B	1 15/32	2 1/32	5/8	7/16	8 3/16	•	•	
1 1/16	OEX340B	–	1 9/16	2 5/32	21/32	15/32	8 17/32	•		
1 1/8	OEX360B	–	1 5/8	2 5/16	11/16	1/2	8 27/32	•		
1 3/16	OEX380B	–	1 23/32	2 13/32	23/32	1/2	9 1/8	•		
1 1/4	OEX400B	–	1 13/16	2 9/16	3/4	17/32	9 7/16	•		
1 5/16	OEX420B	–	1 29/32	2 21/32	3/4	9/16	9 3/4	•		
1 3/8	OEX440B	–	2	2 13/16	3/4	19/32	10 1/16	•		
	Kit Bag								C1505	

ASME® B107.100

*Set includes storage tray

GOEX200B

OEXS715K

OEXS709B

OXIM707SBK

Midget, mm

Set Contains:									OXIM717	OXIM707SBK	OXIM710B**
mm	6	12	A	B	C	D	E		6	12
4	OXIM4SB*	–	7	10	4	3	72	6-Point	•	
5	OXIM5SB*	–	8	12	4	3	76	6-Point	•	
5.5	OXIM55SB	–	9	13	4	4	79	6-Point	•	
6	OXIM6SB	OXIM6B	10	13	5	4	81	12-Point	•	
7	OXIM7SB	OXIM7B	11	15	5	4	85	12-Point	•	
8	OXIM8SB	OXIM8B	13	17	6	4	89	12-Point	•	
9	OXIM9SB	OXIM9B	14	19	6	5	93	12-Point	•	
10	–	OXIM10B	15	21	7	5	98	12-Point		•
11	–	OXIM11B	17	23	8	6	102	12-Point		•
12	–	OXIM12B	18	25	8	6	106	12-Point		•
13	–	OXIM13B	20	27	9	6	110	12-Point		•
14	–	OXIM14B	21	29	9	7	115	12-Point		•
15	–	OXIM15B	22	31	10	7	119	12-Point		•
16	–	OXIM16B	24	33	10	7	122	12-Point		•
17	–	OXIM17B	25	35	11	8	127	12-Point		•
18	–	OXIM18B	27	37	12	8	131	12-Point		•
19	–	OXIM19B	28	39	12	9	136	12-Point		•
	Kit Bag								C0700	

ASME B107.100 *Conventional Hex **Set includes storage tray

WARNING

• Do not use "cheater bars" on handles
• Read safety precautions on pages W1 to W4

FLANK DRIVE® COMBINATION

OXI709SBK



Midget Handle, inches

Set Contains:								OXI709SBK	OXI707BK	OXI715	OXI706B**
	6	12	A	B	C	D	E	6	12		12
1/8	OXI4SB*	–	7/32	11/32	1/8	1/8	2 11/16	•		6-Point	
5/32	OXI5SB*	–	9/32	13/32	5/32	1/8	2 27/32	•		6-Point	
3/16	OXI6SB*	OXI6B*	5/16	7/16	5/32	1/8	2 31/32	•	•	12-Point	
7/32	OXI7SB	OXI7B	3/8	1/2	3/16	1/8	3 3/32	•	•	12-Point	
1/4	OXI8SB	OXI8B	13/32	17/32	3/16	5/32	3 7/32	•	•	12-Point	
9/32	OXI9SB	OXI9B	7/16	19/32	7/32	5/32	3 11/32	•	•	12-Point	
5/16	OXI10SB	OXI10B	1/2	21/32	7/32	5/32	3 1/2	•	•	12-Point	
11/32	OXI11SB	OXI11B	17/32	23/32	1/4	3/16	3 5/8	•	•	12-Point	
3/8	OXI12SB	OXI12B	19/32	25/32	1/4	3/16	3 3/4	•	•	12-Point	
7/16	–	OXI14B	21/32	29/32	5/16	7/32	4 1/32			12-Point	•
1/2	–	OXI16B	3/4	1 1/16	11/32	1/4	4 9/32			12-Point	•
9/16	–	OXI18B	27/32	1 5/32	3/8	9/32	4 17/32			12-Point	•
5/8	–	OXI20B	15/16	1 5/16	13/32	9/32	4 13/16			12-Point	•
11/16	–	OXI22B	1 1/32	1 13/32	7/16	5/16	5 1/16			12-Point	•
3/4	–	OXI24B	1 1/8	1 9/16	15/32	11/32	5 11/32			12-Point	•
	Kit Bag							C0900A	C0700		

ASME® B107.100 *Conventional Hex **Set includes storage tray

FHOM606B



FHO607B

Flex-Combination, mm

Set Contains:							FHOM606B
mm	12	A	B	D	E	F	12
8	FHOM8B	12	17	5	146	6	
9	FHOM9B	13	18	5	156	6	
10	FHOM10B	14	20	5	166	6	•
11	FHOM11B	16	23	6	181	7	
12	FHOM12B	17	30	6	198	9	•
13	FHOM13B	19	27	7	205	9	•
14	FHOM14B	20	30	7	213	9	•
15	FHOM15B	21	31	7	224	10	•
16	FHOM16B	23	33	7	229	10	
17	FHOM17B	24	37	8	246	10	•
18	FHOM18B	24	38	8	254	11	
19	FHOM19B	26	40	8	261	12	

ASME B107.100 Set includes storage tray

Flex-Combination, inches

Set Contains:							FHO607B
	12	A	B	D	E	F	12
1/4	FHO8B	3/8	17/32	1/8	4 15/16	7/32	
5/16	FHO10B	15/32	21/32	3/16	5 31/32	1/4	
3/8	FHO12B	9/16	17/32	7/32	6 1/2	1/4	•
7/16	FHO14B	5/8	29/32	7/32	7 1/8	9/32	•
1/2	FHO16B	23/32	1 1/16	1/4	7 13/16	11/32	•
9/16	FHO18B	25/32	1 3/16	9/32	8 3/8	11/32	•
5/8	FHO20B	29/32	1 5/16	9/32	9	3/8	•
11/16	FHO22B	1	1 7/16	9/32	9 11/16	13/32	•
3/4	FHO24B	1 1/32	1 1/2	5/16	10 1/4	15/32	•
13/16	FHO26B	1 1/32	1 23/32	5/16	10 5/16	1/2	
7/8	FHO28B	1 3/16	1 27/32	5/16	10 15/32	9/16	

ASME B107.100 Set includes storage tray

British Standard, Short Handle



WOEX90B

BS	Decimal Equiv., inches	12	A	B	C	D	E
3/16"	.338	WOEX6B	25/32	19/32	3/16	1/4	5 3/32
1BA	.365	WOEX70B	25/32	19/32	3/16	1/4	5 1/8
0BA	.413	WOEX80B	29/32	21/32	7/32	5/16	5 13/32
1/4"	.445	WOEX90B	29/32	21/32	7/32	5/16	5 15/32
5/16"	.525	WOEX100B	1 5/32	27/32	9/32	3/8	6 1/32
3/8"	.600	WOEX110B	1 5/16	15/16	9/32	13/32	6 11/32
7/16"	.710	WOEX120B	1 5/16	1 1/32	5/16	7/16	6 23/32

SPLINE COMBINATION

Snap-on® spline wrenching tools have been developed to service high tensile strength spline nuts and bolts widely used on both military and commercial aircraft. Precise, radial spline teeth engage the fastener teeth over a wider area to minimize stress, and allow application of high torque to reduce risk of damage to the fastener or to the tool. Chrome tools comply with Military Spec. MS-33787 and MIL-W-8982. The unique spline wrenching configuration can also be used on ordinary six- and 12-point fasteners with an advantage similar to the *Snap-on* Flank Drive® wrenching system.

Short Handle, inches

		Stock No.	A	B	C	D	E
#8	1/4	**OES8B**	13/32	17/32	1/8	5/32	4 1/2
#10	5/16	**OES10B**	15/32	21/32	11/64	15/64	4 55/64
#12	3/8	**OES12B**	17/32	25/32	13/64	17/64	5 7/32
#14	7/16	**OES14B**	5/8	29/32	15/64	5/16	5 27/64
#16	1/2	**OES16B**	23/32	1 1/16	1/4	5/16	5 47/64
#18	9/16	**OES18B**	13/16	1 3/16	17/64	21/64	6 1/32
#20	5/8	**OES20B**	7/8	1 5/16	9/32	11/32	6 5/16
#22	11/16	**OES22B**	31/32	1 7/16	19/64	23/64	6 39/64
#24	3/4	**OES24B**	1 1/16	1 9/16	5/16	3/8	6 29/32

OES18B

COMBINATION Blue-Point®

BLPCWSM712



BLPCWS711

Standard Handle, mm

Set Contains: BLPCWSM712

mm	Stock No.	Length, mm	12
8	**BLPCWM8**	148	•
9	**BLPCWM9**	160	•
10	**BLPCWM10**	167	•
11	**BLPCWM11**	186	•
12	**BLPCWM12**	196	•
13	**BLPCWM13**	205	•
14	**BLPCWM14**	223	•
15	**BLPCWM15**	233	•
16	**BLPCWM16**	243	•
17	**BLPCWM17**	262	•
18	**BLPCWM18**	272	•
19	**BLPCWM19**	281	•

Set includes storage tray

Standard Handle, inches

Set Contains: BLPCWS711

	Stock No.	Length, inches	12
1/4	**BLPCW14**	5 1/32	
5/16	**BLPCW516**	5 7/32	
3/8	**BLPCW38**	6 9/16	•
7/16	**BLPCW716**	7 11/32	•
1/2	**BLPCW12**	8 1/16	•
9/16	**BLPCW916**	8 25/32	•
5/8	**BLPCW58**	9 9/16	•
11/16	**BLPCW1116**	10 5/16	•
3/4	**BLPCW34**	11 1/16	•
13/16	**BLPCW1316**	11 27/32	•
7/8	**BLPCW78**	12 9/16	•
15/16	**BLPCW1516**	13 11/32	•
1	**BLPCW1**	14 3/32	•

Set includes storage tray

FLANK DRIVE OFFSET BOX

Standard Handle, 10° Offset, mm

Set Contains: XBM605A

mm	6	12	A	C	E	12
8–10	–	**XBM810A**	12.3–15	6.7–7.7	185	
10–11	–	**XBM1011A**	15–16.4	7.7–8.3	202	•
10–12	–	**XBM1012A**	15–17.7	7.7–8.8	208	
11–13	–	**XBM1113A**	16.4–19.1	8.3–9.3	219	
12–14	**XBM1214SA**	**XBM1214A**	17.7–20.4	8.8–9.7	230	•
13–15	**XBM1315SA**	**XBM1315A**	19.1–21.8	9.3–10.2	241	•
14–17	–	**XBM1417A**	20.4–24.5	9.8–11.4	248	
16–18	–	**XBM1618A**	23.1–25.9	10.9–11.9	275	•
17–19	–	**XBM1719A**	24.5–27.2	11.4–12.3	286	•
18–21	–	**XBM1821A**	25.9–29.9	11.9–13.3	303	
22–24	–	**XBM2224A**	31.3–34	13.7–14.7	342	
27–30	–	**XBM2730A**	38.1–42.2	16–17.3	404	

ASME® B107.100

Set includes storage tray



XBM605A

⚠WARNING

- Do not use "cheater bars" on handles
- Read safety precautions on pages W1 to W4

FLANK DRIVE® OFFSET BOX



XB605A

Standard Handle, 10° Offset, inches

Set Contains: XB605A

	12	A	C	E	12
3/8–7/16	**XB1214A**	9/16–21/32	5/16–11/32	7 19/32	•
7/16–1/2	**XB1416A**	21/32–3/4	5/16–11/32	7 15/16	
1/2–9/16	**XB1618A**	3/4–13/16	11/32–3/8	8 11/16	•
9/16–5/8	**XB1820A**	13/16–29/32	13/32–7/16	9 13/32	
5/8–11/16	**XB2022A**	29/32–1	7/16–15/32	10 5/32	•
11/16–3/4	**XB2224A**	1–1 1/16	15/32–1/2	10 15/16	
3/4–13/16	**XB2426A**	1 1/16–1 5/32	1/2–17/32	11 21/32	•
7/8–15/16	**XB2830A**	1 1/4–1 11/32	17/32–9/16	13 1/8	•
15/16–1	**XB3032A**	1 11/32–1 13/32	9/16–19/32	13 7/8	
1–1 1/16	**XB3234A**	1 13/32–1 1/2	19/32–5/8	14 19/32	
1 1/16–1 1/4	**XB3440A**	1 1/2–1 3/4	5/8–23/32	16 3/32	
1 1/8–1 3/16	**XB3638A**	1 9/32–1 21/32	21/32–11/16	16 3/32	
1 1/4–1 5/16	**XB4042A**	1 3/4–1 27/32	23/32–3/4	17 19/32	
1 3/8–1 7/16	**XB4446A**	1 31/32–2 1/16	3/4–25/32	19 1/8	
1 1/2–1 5/8	**XB4852A**	2 3/32–2 9/32	13/16–7/8	20 15/16	

ASME® B107.100 Set includes storage tray

XSM608A

Short Handle, 10° Offset, mm

Set Contains: XSM608A

mm	12	A	C	E	12
6–7	**XSM67A**	9.6–10.9	5.7–6.2	86	•
8–9	**XSM89A**	12.3–13.7	6.7–7.2	103	•
8–10	**XSM810**	12.3–15	6.7–7.7	107	
9–10	**XSM910A**	13.7–15	7.2–7.7	112	•
11–12	**XSM1112A**	16.4–17.7	8.3–8.8	128	•
13–14	**XSM1314A**	19.1–20.4	9.3–9.8	146	•
15–16	**XSM1516A**	21.8–23.1	10.2–10.9	163	•
17–19	**XSM1719A**	24.5–27.2	11.4–12.3	185	•
18–20	**XSM1820A**	25.9–28.6	11.9–12.8	194	•

ASME B107.100 Set includes storage tray

XS609A

Short Handle, 10° Offset, inches

Set Contains: XS609A

	12	A	C	E	12
3/16–7/32	**XS67A**	5/16–11/32	7/32–7/32	3 27/32	•
1/4–5/16	**XS810A**	13/32–15/32	1/4–9/32	4 1/4	•
5/16–3/8	**XS1012A**	15/32–9/16	9/32–5/16	4 9/16	•
3/8–7/16	**XS1214A**	9/16–21/32	5/16–11/32	4 29/32	•
7/16–1/2	**XS1416A**	21/32–3/4	11/32–11/32	5 3/16	•
1/2–9/16	**XS1618A**	3/4–13/16	3/8–3/8	5 17/32	•
9/16–5/8	**XS1820A**	13/16–29/32	13/32–7/16	5 7/8	•
5/8–3/4	**XS2024A**	29/32–1 1/16	7/16–1/2	6 3/8	•
11/16–13/16	**XS2226A**	1–1 5/32	15/32–17/32	6 23/32	•

ASME B107.100 Set includes storage tray

XID604KA

Midget Handle, 10° Offset, inches

Set Contains: XID604KA

	12	A	C	E	12
3/16–13/64	**XID1213A**	5/16–11/32	1/8–5/32	2 13/16	•
7/32–15/64	**XID1415A**	3/8–3/8	5/32–5/32	3 1/16	•
1/4–9/32	**XID1618A**	13/32–7/16	5/32–3/16	3 13/32	•
5/16–11/32	**XID2022A**	15/32–1/2	3/16–7/32	3 31/32	•
	Kit Bag				**C0401**

ASME B107.100

FLANK DRIVE® OFFSET BOX



Heads of XO, XOM and XSO wrenches deep 60° offset for improved access to recessed fasteners.

XOM605

XO605

Standard Handle, Deep 60° Offset, mm

Set Contains: XOM605

mm	12	A	B	C	12
8–10	XOM810	11.7–14.2	6.9–7.3	178.1	
9–10	XOM910	14.2–16.3	7.6	193.0	
10–11	XOM1011	15–16.3	7.6	193.0	•
12–14	XOM1214	15–20.3	9.0	210.0	•
13–14	XOM1314	18.8–21.2	8.9	223.3	
13–15	XOM1315	16.3–21.2	8.9	223.0	•
15–16	XOM1516	23.0–25.2	10.8	252.7	
16–18	XOM1618	17.7–25.4	10.8	253.0	•
17–19	XOM1719	17.7–27.4	11.1	260.0	•
18–20	XOM1820	32.5–33.3	13.8	330.0	
20–21	XOM2021	32.5–33.3	13.7	329.6	
22–24	XOM2224	31.9–34.1	13.7	329.6	

ASME® B107.100

Set includes storage tray

Standard Handle, Deep 60° Offset, inches

Set Contains: XO605

	12	A	B	C	12
1/4–5/16	XO810	3/8	9/32 (1/4–9/32)	6 13/32	
5/16–3/8	XO1012	15/32–9/16	9/32	7	
3/8–7/16	XO1214	9/16–5/8	5/16	7 19/32	•
1/2–9/16	XO1618	23/32–13/16	11/32	8 25/32	•
9/16–5/8	XO1820	13/16–29/32	13/32	9 3/8	•
5/8–11/16	XO2022	29/32–1	13/32	9 15/16	
5/8–3/4	XO2024	29/32–1 3/32	7/16	10 1/4	
11/16–13/16	XO2226	1–1 5/32	15/32	10 27/32	•
3/4–7/8	XO2428	1 3/32–1 1/4	1/2	11 13/32	•
7/8–15/16	XO2830	1 1/4–1 11/32	17/32	12 31/32	
15/16–1	XO3032	1 11/32–1 7/16	9/16	13 15/16	

ASME/ANSI® B107.6

Set includes storage tray

Short Handle, Deep 60° Offset, inches

	12	A	B	C
1/4–9/32	XSO89	13/32–7/16	3/16–7/32	3 7/8
1/4–5/16	XSO810A	3/8–7/16	3/16–7/32	4 5/32
3/8–7/16	XSO1214A	17/32–5/8	1/4–9/32	4 13/16
5/8–11/16	XSO2022	29/32–1	3/8–7/16	6 5/16
5/8–3/4	XSO2024A	7/8–1 1/16	3/8–7/16	6 1/2

XSO1214A

ASME/ANSI B107.100

FLANK DRIVE HIGH PERFORMANCE OFFSET BOX

Standard Handle, 0° Offset Heads, mm

Set Contains: XDHFM606

mm	12	A	C	E	12
6–7	XDHFM67	9.1–10.4	5.3–5.8	211.5	
8–9	XDHFM89	11.6–13.0	5.8–6.2	226.1	
8–10	XDHFM810	11.6–14.4	6.2–7.6	232.7	
10–11	XDHFM1011	14.4–15.6	7.6–8.5	253.7	•
10–12	XDHFM1012	14.4–17.1	8.5–9.0	272.2	
12–13	XDHFM1213	17.1–18.7	9.0–9.0	286.2	•
12–14	XDHFM1214	17.1–20.1	9.0–10.2	298.4	
13–14	XDHFM1314	18.7–20.1	9.0–9.7	299.2	
13–15	XDHFM1315	20.1–21.5	9.8–10.9	323.5	
14–15	XDHFM1415	20.1–21.5	9.8–10.9	323.5	•
14–17	XDHFM1417	20.1–23.7	9.8–11.3	345.0	
15–16	XDHFM1516	21.5–22.6	10.9–10.9	347.5	•
16–18	XDHFM1618	23.8–26.3	11.3–12.1	372.1	
17–19	XDHFM1719	23.8–26.3	11.3–12.1	372.1	•
18–20	XDHFM1820	25.0–27.3	12.1–13.6	395.7	•
21–22	XDHFM2122	28.8–30.6	13.7–14.6	421.2	
22–24	XDHFM2224	30.6–33.1	14.0–14.9	445.2	

Set includes storage tray



XDHFM606

XDHF605

Standard Handle, 0° Offset Heads, inches

Set Contains: XDHF605

	12	A	C	E	12
1/4–5/16	XDHF810	13/32–15/32	7/32–1/4	8 5/16	•
3/8–7/16	XDHF1214	17/32–5/8	5/16–11/32	10 1/16	•
1/2–9/16	XDHF1618	23/32–13/16	11/32–13/32	11 3/4	•
5/8–3/4	XDHF2024	7/8–1 1/32	7/16–15/32	13 5/8	•
11/16–13/16	XDHF2226	31/32–1 5/32	15/32–17/32	15 5/8	•

Set includes storage tray

⚠WARNING

- Do not use "cheater bars" on handles
- Read safety precautions on pages W1 to W4

FLANK DRIVE® HIGH PERFORMANCE OFFSET BOX



Short Handle, 0° Offset Heads, mm

XDHSFM1214

mm	12	A	C	E
8–10	**XDHSFM810**	12.1–14.9	6.2–7.6	162.9
10–12	**XDHSFM1012**	14.4–17.1	7.6–9.0	190.5
12–14	**XDHSFM1214**	17.1–20.1	8.5–10.2	208.8
17–19	**XDHSFM1719**	23.8–26.3	11.3–12.1	260.3

Short Handle, 15° Offset Heads, inches

XDHS1012

	12	A	C	E
5/16–3/8	**XDHS1012**	31/64–9/16	1/4–5/16	7



Standard Handle, 15° Offset Heads, mm

Set Contains: XDHM606

XDHM606

mm	12	A	C	E	12
8–9	**XDHM89**	11.6–13.0	5.8–6.2	219.2	•
8–10	**XDHM810**	11.6–14.4	6.2–7.6	225.6	
10–11	**XDHM1011**	14.4–15.6	7.6–8.5	246.3	•
10–12	**XDHM1012**	14.4–17.1	7.6–9.0	264.0	
12–13	**XDHM1213**	17.1–18.7	9.0–9.0	277.6	•
12–14	**XDHM1214**	17.1–20.1	9.0–10.2	289.6	
14–15	**XDHM1415**	20.1–21.5	9.8–10.9	313.1	•
14–17	**XDHM1417**	20.1–23.7	9.8–11.3	334.7	
15–16	**XDHM1516**	21.5–22.6	10.9–10.9	334.8	
17–19	**XDHM1719**	23.7–26.3	11.3–12.1	360.1	•
18–20	**XDHM1820**	24.9–27.3	12.1–13.6	384.0	•

Set includes storage tray

Standard Handle, 15° Offset Heads, inches

Set Contains: XDH605

GXDH1618A

XDH605

	12	12	A	C	E	12
7/32–1/4	**XDH78A**	**GXDH78A**	11/32–3/8	13/64–15/64	7 15/64	
1/4–5/16	**XDH810B**	**GXDH810B**	3/8–29/64	1/4–1/4	8 3/64	•
5/16–3/8	**XDH1012B**	**GXDH1012B**	29/64–35/64	1/4–19/64	8 7/8	
3/8–7/16	**XDH1214A**	**GXDH1214A**	35/64–5/8	19/64–11/32	9 11/16	•
7/16–1/2	**XDH1416A**	**GXDH1416A**	11/32–3/4	11/32–23/64	10 7/16	
1/2–9/16	**XDH1618A**	**GXDH1618A**	23/32–13/16	23/64–13/32	11 7/16	•
9/16–5/8	**XDH1820A**	–	13/16–29/32	13/32–7/16	12 3/8	
5/8–3/4	**XDH2024A**	–	57/64–1 3/64	7/16–31/64	13 9/32	•
11/16–3/4	**XDH2224A**	–	31/32–1 1/32	15/32–3/4	14 7/32	
11/16–13/16	**XDH2226A**	–	63/64–1 9/64	31/64–17/32	15 5/32	•
3/4–7/8	**XDH2428**	–	1 3/64–1 1/64	31/64–37/64	15 3/4	
25/32–7/8	**XDH2528**	–	1 5/64–1 13/64	35/64–37/64	16 5/64	
15/16–1	**XDH3032**	–	1 5/16–1 25/64	37/64–39/64	15 1/2	
1 1/16–1 1/4	**XDH3440**	–	1 31/64–1 47/64	5/8–23/32	18 1/4	
1 1/4–1 5/16	**XDH4042**	–	1 47/64–1 13/16	23/32–47/64	19 1/4	
1 1/4–1 3/8	**XDH4044**	–	1 47/64–1 15/16	23/32–49/64	20 1/4	
1 1/4–1 7/16	**XDH4046**	–	1 47/64–2	23/32–51/64	21	
1 7/16–1 1/2	**XDH4648**	–	2–2 1/16	51/64–13/16	22	

Aerospace Spec. AS954E

Set includes storage tray

SPLINE OFFSET BOX

Snap-on® spline wrenching tools have been developed to service high tensile strength spline nuts and bolts widely used on both military and commercial aircraft.
Precise, radial spline teeth engage the fastener teeth over a wider area to minimize stress, and allow application of high torque to reduce risk of damage to the fastener or to the tool.

Chrome tools comply with Military Spec. MS-33787 and MIL-W-8982. The unique spline wrenching configuration can also be used on ordinary six- and 12-point fasteners with an advantage similar to the *Snap-on* Flank Drive® wrenching system.

Standard Handle, 15° Offset Heads, inches

XDES1618A



		Stock No.	A	C	E
#7–#9	7/32–9/32	XDES79A	11/32–7/16	11/64–13/64	7 1/4
#8–#10	1/4–5/16	XDES810A	3/8–15/32	3/16–7/32	8 1/16
#12–#14	3/8–7/16	XDES1214A	35/64–41/64	5/16–11/32	9 3/4
#16–#18	1/2–9/16	XDES1618A	3/4–13/16	3/8–3/8	11 7/16
#18–#20	9/16–5/8	XDES1820A	13/16–57/64	25/64–13/32	12 3/8
#22–#24	11/16–3/4	XDES2224A	31/32–1 5/64	7/16–5/64	14 1/4
#26–#30	13/16–15/16	XDES2630A	1 5/32–1 5/16	1/2–9/16	16 3/16
#28–#32	7/8–1	XDES2832A	1 1/4–1 7/16	1 7/32–37/64	17

TORX® OFFSET BOX



XLE605

Standard Handle, *TORX*

Set Contains: XLE605

#		A	C	E	
E5–E6	XLE56	9/32–5/16	5/32–3/16	6 13/32	•
E7–E8	XLE78	11/32–3/8	7/32–7/32	7 7/32	•
E10–E12	XLE1012A	15/32–17/32	1/4–5/16	8 7/8	•
E14–E16	XLE1416	5/8–23/32	11/32–11/32	10 7/16	•
E18–E20	XLE1820	13/16–7/8	13/32–7/16	12 3/8	•

ASME® B107.100

Set includes storage tray

FLANK DRIVE SPECIALTY BOX



CXM605

Half Moon, mm

Set Contains: CXM605

mm	12	A	C	E	F	12
10–12	CXM1012	15–17	6–7	128	48	•
11–13	CXM1113	16–18	8–8	144	57	•
14–17	CXM1417	20–23	9–9	166	65	•
15–19	CXM1519	22–27	10–11	198	78	•
18–21	CXM1821	27–31	11–13	224	86	•

ASME B107.100

CX605

Half Moon, inches

Set Contains: CX605

	12	A	C	E	F	12
5/16–3/8	CX1012	15/32–9/16	3/16–5/16	4 5/8	2 1/16	
7/16–1/2	CX1416	5/8–23/32	5/16–5/16	5	2 7/32	•
9/16–5/8	CX1820	13/16–7/8	11/32–3/8	6 1/2	2 9/16	•
5/8–3/4	CX2024	7/8–1 7/32	13/32–7/16	7 3/4	3 1/16	•
11/16–13/16	CX2226	31/32–1 9/32	13/32–15/32	8 1/2	3 1/2	•
7/8–15/16	CX2830	1 1/4–1 11/32	9/16–9/16	10	4 1/16	•

ASME B107.100

⚠WARNING

- Do not use "cheater bars" on handles
- Read safety precautions on pages W1 to W4

FLANK DRIVE® SPECIALTY BOX

SBXM605

"S" Shaped, mm

mm	12	A	C	E	Set Contains: SBXM605 12
10–12	SBXM1012	14–18	6–8	140	•
11–13	SBXM1113	16–19	7–8	155	•
14–15	SBXM1415	21–22	9–9	190	•
16–18	SBXM1618	24–27	10–11	173	•
17–19	SBXM1719	25–28	10–12	240	•

ASME® B107.100 — Set includes storage tray



SBX605

"S" Shaped, inches

	12	A	C	E	Set Contains: SBX605 12
5/16–3/8	SBX1012	15/32–9/16	9/16–7/32	3 3/4	•
7/16–1/2	SBX1416	21/32–3/4	9/32–5/16	5 5/16	•
9/16–5/8	SBX1820	27/32–15/16	11/32–13/32	6 7/8	•
11/16–3/4	SBX2224	1 1/32–1 1/8	13/32–15/32	8 7/16	•
13/16–7/8	SBX2628	1 7/32–1 5/16	17/32–9/16	10	•

ASME B107.100 — Set includes storage tray

OPEN END

VOM1415B

Standard, mm

mm	Stock No.	B	D	E
6–7	VOM67B	13–15	4–4	97
7–8	VOM78B	15–17	4–4	106
8–9	VOM89B	17–20	4–5	119
8–10	VOM810B	17–21	4–5	121
10–11	VOM1011B	21–23	5–6	136
11–13	VOM1113B	23–27	6–6	151
12–13	VOM1213B	25–27	6–6	157
12–14	VOM1214B	25–29	6–7	162
14–15	VOM1415B	29–31	7–7	178
16–18	VOM1618B	33–37	7–8	205
17–19	VOM1719B	35–38	8–9	216
19–22	VOM1922B	39–46	9–10	245
21–24	VOM2124B	43–49	9–10	267
22–24	VOM2224B	46–49	10–10	273
27–30	VOM2730B	55–61	11–12	338
30–32	VOM3032B	61–65	12–12	368

ASME/ANSI® B107.100



V0806B

Standard, inches

	Stock No.	B	D	E	Set Contains: V0820K	V0806B*
3/16–1/4	V068	13/32	9/64	3 13/32		
1/4–5/16	V0810B	17/32–21/32	5/32–5/32	4 1/16	•	•
5/16–3/8	V01012B	21/32–25/32	5/32–3/16	4 21/32	•	
3/8–7/16	V01214B	25/32–29/32	3/16–7/32	5 5/16	•	•
7/16–1/2	V01416B	29/32–1 1/16	7/32–1/4	5 15/16	•	
1/2–9/16	V01618B	1 1/16–1 5/32	1/4–9/32	6 19/32	•	•
9/16–5/8	V01820B	1 5/32–1 5/16	9/32–9/32	7 9/32	•	
5/8–11/16	V02022B	1 5/16–1 13/32	9/32–5/16	7 15/16	•	•
5/8–3/4	V02024B	1 5/16–1 9/16	9/32–11/32	8 9/32	•	
11/16–3/4	V02224B	1 13/32–1 9/16	5/16–11/32	8 5/8	•	
3/4–13/16	V02426B	1 9/16–1 21/32	11/32–3/8	9 11/32	•	•
3/4–7/8	V02428B	1 9/16–1 13/16	11/32–3/8	9 21/32	•	
13/16–7/8	V02628B	1 21/32–1 13/16	3/8–3/8	10 1/32	•	
7/8–15/16	V02830B	1 13/16–1 29/32	3/8–13/32	10 3/4	•	•
15/16–1	V03032B	1 29/32–2 1/32	13/32–13/32	11 15/32	•	
1–1 11/16	V03234B	2 1/32–2 5/32	13/32–7/16	12 7/32	•	
1 1/16–1 1/4	V03440B	2 5/32–2 17/32	7/16–1/2	12 15/16	•	
1 1/8–1 3/16	V03638B	2 5/16–2 13/32	7/16–15/32	13 23/32	•	
1 1/4–1 5/16	V04042B	2 17/32–2 21/32	1/2–1/2	15 1/4	•	
1 3/8–1 7/16	V04446B	2 13/16–2 29/32	17/32–17/32	16 7/8	•	
1 1/2–1 5/8	V04852B	3 1/16–3 5/16	9/16–19/32	18 29/32	•	
	Kit Bag				C200	

ASME/ANSI B107.100 — *Set includes storage tray



Low Torque Slimline, 15° Offset, mm

Set Contains: LTAM811

mm	Stock No.	B	D	E	
6–7	LTAM67	13–15	3	165	•
8–10	LTAM810	17–21	3	165	•
10–11	LTAM1011	21–23	3	165	•
12–14	LTAM1214	25–29	4	241	•
13–15	LTAM1315	27–31	4	241	•
16–18	LTAM1618	33–37	4	241	•
17–19	LTAM1719	35–39	4	241	•
19–22	LTAM1922	39–45	4	241	•
21–24	LTAM2124	43–49	4	241	•
27–30	LTAM2730	55–61	6	311	•
32–36	LTAM3236	65–73	6	311	•

ASME®/ANSI® B107.100

LTAM811

Low Torque Slimline, 15° Offset, inches

Set Contains: LTA812 / LTA805K

"	Stock No.	B	D	E		
3/8–7/16	LTA1214	25/32–29/32	3/32	9 1/2	•	
7/16–1/2	LTA1416	29/32–1 1/32	5/32	9 1/2	•	•
1/2–9/16	LTA1618	1 1/32–1 5/32	5/32	9 1/2	•	•
5/8–11/16	LTA2022	1 9/32–1 13/32	5/32	9 1/2	•	•
3/4–13/16	LTA2426	1 17/32–1 11/16	5/32	9 1/2	•	
3/4–7/8	LTA2428	1 17/32–1 25/32	5/32	9 1/2	•	•
15/16–1	LTA3032	1 29/32–2 1/32	5/32	9 1/2	•	•
1 1/16–1 1/8	LTA3436	2 5/32–2 9/32	1/4	12 1/4	•	
1 1/4–1 5/16	LTA4042	2 17/32–2 21/32	1/4	12 1/4	•	
1 3/8–1 7/16	LTA4446	2 25/32–2 29/32	1/4	12 1/4	•	
1 1/2–1 5/8	LTA4852	3 1/16–3 9/32	9/32	14 1/4	•	
1 11/16–1 7/8	LTA5460	3 13/32–3 17/32	9/32	14 1/4	•	
	Kit Bag					C0507

ASME B107.100

LTA805K



Ignition, 15/60° Offset, mm

Set Contains: DSM810K

A	B	Stock No.	C	D	E	
3.2	5.5	DSM3.25.5	8–11	3	74	•
5.5	3.2	DSM5.53.2	11–8	3	83	•
4	5	DSM45	9–11	3	77	•
5	4	DSM54	11–9	3	81	•
6	7	DSM67	12–14	3	85	•
7	6	DSM76	14–12	3	89	•
8	9	DSM89	15–17	3	93	•
9	8	DSM98	17–15	3	97	•
10	11	DSM1011	20–22	4	101	•
11	10	DSM1110	22–20	4	105	•
		Kit Bag				C1003A

ASME/ANSI B107.100

DSM810K

Ignition, 15/60° Offset, inches

Set Contains: DS809K / DS806AK

A	B	Stock No.	C	D	E		
1/8	1/8	DS88A	5/16–5/16	1/8	2 29/32	•	
5/32	5/32	DS1010A	3/8–3/8	1/8	2 7/8	•	
3/16	3/16	DS1212A	13/32–13/32	1/8	3 1/8	•	
15/64	1/4	DS1516A	15/32–1/2	1/8	3 1/4	•	•
1/4	15/64	DS1615A	1/2–15/32	1/8	3 13/32	•	•
9/32	5/16	DS1820A	9/16–19/32	1/8	3 1/2	•	•
5/16	9/32	DS2018A	19/32–9/16	1/8	3 21/32	•	•
11/32	3/8	DS2224A	21/32–23/32	5/32	3 3/4	•	•
3/8	11/32	DS2422A	23/32–21/32	5/32	3 3/4	•	•
		Kit Bag				C0900A	C0605

ASME/ANSI B107.100

DS809K

⚠WARNING

- Use only moderate force on slim line wrenches
- Do not use "cheater bars" on handles
- Read safety precautions on pages W1 to W4

OPEN END

VSM807B

Four-Way Angle Head, mm

- Angle head wrenches offset at 30° and 60° angles to the handle
- Both ends are same size to permit use of one wrench in four positions

mm	Stock No.	B	D	E	Set Contains: VSM814	VSM807B*
10	VSM5210B	20	6	127	•	•
11	VSM5211B	22	6	137	•	•
12	VSM5212B	24	6	145	•	•
13	VSM5213B	26	6	154	•	•
14	VSM5214B	28	6	164	•	•
15	VSM5215B	30	7	173	•	•
16	VSM5216B	31	7	181	•	
17	VSM5217B	34	7	191	•	•
18	VSM5218B	36	7	200	•	
19	VSM5219B	37	7	210	•	
21	VSM5221B	41	8	228	•	
22	VSM5222B	44	8	239	•	
24	VSM5224B	47	8	254	•	
27	VSM5227B	53	9	283	•	

ASME® B107.100 *Set includes storage tray

GVS24B

VS807B

Four-Way Angle Head, inches

Stock No.	Industrial Stock No.	B	D	E	Set Contains: VS828A	VS814A	VS807B*
1/4	VS8B	–	17/32	3/16	3 11/16	•		
5/16	VS10B	–	21/32	3/16	4 1/4	•		
11/32	VS11B	–	23/32	7/32	4 17/32	•		
3/8	VS12B	–	25/32	7/32	4 27/32	•	•	•
7/16	VS14B	–	7/8	7/32	5 13/32	•	•	•
1/2	VS16B	GVS16B	1	1/4	5 31/32	•	•	•
9/16	VS18B	GVS18B	1 1/8	1/4	6 9/16	•	•	•
5/8	VS20B	GVS20B	1 1/4	9/32	7 1/8	•	•	•
11/16	VS22B	GVS22B	1 3/8	9/32	7 11/16	•	•	•
3/4	VS24B	GVS24B	1 15/32	9/32	8 9/32	•	•	•
13/16	VS26B	GVS26B	1 19/32	5/16	8 27/32	•	•	
7/8	VS28B	GVS28B	1 23/32	5/16	9 13/32	•	•	
15/16	VS30B	GVS30B	1 27/32	11/32	10	•	•	
1	VS32B	GVS32B	1 31/32	11/32	10 9/16	•	•	
1 1/16	VS34B	–	2 3/32	11/32	11 1/8	•	•	
1 1/8	VS36B	–	2 3/16	3/8	11 23/32	•	•	
1 3/16	VS38B	–	2 11/32	3/8	12 9/32	•		
1 1/4	VS40B	GVS40B	2 7/16	13/32	12 7/8	•	•	
1 5/16	VS42B	–	2 9/16	13/32	13 7/16	•		
1 3/8	VS44B	–	2 11/16	13/32	14	•		
1 7/16	VS46B	–	2 27/32	7/16	14 19/32	•		
1 1/2	VS48B	–	2 15/16	7/16	15 5/32	•		
1 5/8	VS52B	–	3 7/32	15/32	16 5/16	•		
1 11/16	VS54B	–	3 11/32	1/2	16 7/8	•		
1 3/4	VS56B	–	3 15/32	1/2	17 7/16	•		
1 13/16	VS58B	–	3 19/32	1/2	18	•		
1 7/8	VS60B	–	3 23/32	17/32	18 19/32	•		
2	VS64B	–	3 31/32	9/16	19 3/4	•		

ASME B107.100 *Set includes storage tray

ANWR708A

- Securely tighten expensive AN fittings to reduce risk of damage in aircraft, marine and industrial applications as well as race and show cars
- Machined from aluminum billet to exacting tolerances
- Made from quality heat treated hardened aluminum
- Corner reliefs on open end wrenches prevent rounding the corners of the fitting
- Handle length designed to apply appropriate torque without overtightening
- Open end wrenches are color-coded and stamped for quick size identification



Aluminum (for "AN" Fittings)

#		Stock No.	Color	A inches (mm)	Set Contains: ANWR708A
No. 3	1/2	ANWR3A	Silver	4 (101.6)	•
No. 4	9/16	ANWR4A	Black	4 3/4 (120.7)	•
No. 6	11/16	ANWR6A	Light Blue	5 3/4 (146.1)	•
No. 8	7/8	ANWR8A	Pink	5 3/4 (146.1)	•
No. 10	1	ANWR10A	Gold	7 1/8 (181.0)	•
No. 12	1 1/4	ANWR12A	Red	7 1/2 (190.5)	•
No. 16	1 1/2	ANWR16A	Brass	8 3/4 (222.3)	•
No. 20	1 13/16	ANWR20A	Dark Blue	9 1/4 (237.0)	•

Set includes heavy gauge vinyl pouch

OPEN END Blue-Point®

BDOEM1415

Open End, mm

mm	Stock No.	Length, mm
10–11	BDOEM1011	145
12–13	BDOEM1213	165
14–15	BDOEM1415	185
16–17	BDOEM1617	185
18–19	BDOEM1819	227

BDOE1820

Open End, inches

Stock No.	Length, inches
5/16–3/8	BDOE1012	5 5/16
7/16–1/2	BDOE1416	6 1/2
9/16–5/8	BDOE1820	7 9/32
11/16–3/4	BDOE2224	8 15/16

ASME/ANSI® B107.100



Open End and Flare Nut, mm

Set Contains: RXSM605B

mm	6	A	B	C	D	E	6
8	RXSM8B	17	17	7	7	135	
9	RXSM9B	18	19	7	7	144	
10	RXSM10B	20	21	8	8	152	•
11	RXSM11B	21	23	9	9	162	•
12	RXSM12B	22	25	9	9	169	•
13	RXSM13B	24	27	9	9	178	•
14	RXSM14B	25	29	10	10	186	•
15	RXSM15B	26	31	10	10	194	
16	RXSM16B	27	33	11	11	202	
17	RXSM17B	29	35	11	11	211	
18	RXSM18B	30	37	12	12	219	
19	RXSM19B	32	39	12	12	228	
20	RXSM20B	33	41	13	13	235	

ASME® B107.100

Set includes storage tray

RXSM605B

Open End and Flare Nut, inches

Set Contains: RXS605B

	6	12	A	B	C	D	E	6
3/8	RXS12B	–	3/4	25/32	5/16	5/16	5 27/32	•
7/16	RXS14B	RXS14BS	27/32	29/32	11/32	11/32	6 3/8	•
1/2	RXS16B	–	29/32	1 1/16	3/8	3/8	6 7/8	•
9/16	RXS18B	–	1	1 5/32	13/32	13/32	7 13/32	•
5/8	RXS20B	–	1 3/32	1 5/16	7/16	7/16	7 15/16	•
11/16	–	RXS22BS	1 5/32	1 13/32	15/32	15/32	6 15/32	
3/4	–	RXS24BS	1 1/4	1 9/16	1/2	1/2	9	

ASME B107.100

Set includes storage tray

RXS605B

Double End Flare Nut, mm

Set Contains: RXFMS606B

mm	12	A–B	C–D	E	12
9–11	RXFMS911B	18–21	7–8	145	•
10–12	RXFMS1012B	20–22	8–9	153	•
13–14	RXFMS1314B	24–25	9–10	173	•
15–17	RXFMS1517B	26–29	10–11	193	•
16–18	RXFMS1618B	28–30	11–12	200	•
19–21	RXFMS1921B	32–34	12–13	223	•

ANSI® B107.100

Set includes storage tray

RXFMS606B

Double End Flare Nut, inches

Set Contains: RXFS605B

	12	A–B	C–D	E	12
1/4–5/16	RXFS810B	19/32–21/32	1/4–9/32	4 27/32	•
3/8–7/16	RXFS1214B	3/4–27/32	5/16–11/32	5 13/16	•
1/2–9/16	RXFS1618B	29/32–1	3/8–13/32	6 13/16	•
5/8–11/16	RXFS2022B	1 3/32–1 5/32	7/16–15/32	7 3/4	•
3/4–13/16	RXFS2426B	1 1/4–1 5/16	1/2–17/32	8 25/32	•
3/4–7/8	RXFS2428B	1 1/4–1 27/64	1/2–5/8	9 1/2	
3/4–1	RXFS2432B	1 1/4–1 9/16	1/2–5/8	9 1/2	
7/8–1 1/8	RXFS2836B	1 13/32–1 3/4	9/16–11/16	10 1/2	

ASME B107.100

Set includes storage tray

RXFS605B

⚠WARNING

- Use only moderate force on flare nut wrenches
- Do not use "cheater bars" on handles
- Read safety precautions on pages W1 to W4

CROWFOOT WRENCHES, 1/4" DRIVE

Flank Drive® Plus, Open End, inches

TMCOS16



		A	C	D	E	F
7/16	TMCOS14	29/32	5/8	1 5/32	5/16	5/16
1/2	TMCOS16	1 1/16	21/32	1 15/64	5/16	5/16
9/16	TMCOS18	1 5/32	11/16	1 19/64	5/16	5/16

Open End, mm

107TMCOM

Set Contains: 107TMCOM

mm	Stock No.	A	C	E	F	D	
7	TMCOM7	13.5	13.2	6.6	6.6	24.4	•
8	TMCOM8	16.8	14.1	6.6	6.6	25.9	•
10	TMCOM10	19.8	14.6	6.6	6.6	27.5	•
11	TMCOM11	22.4	16.0	7.9	7.9	29.4	•
12	TMCOM12	24.4	16.5	7.9	7.9	30.6	•
13	TMCOM13	26.4	16.6	7.9	7.9	31.2	•
14	TMCOM14	29.0	17.7	7.9	7.9	32.9	•

ASME® B107.21

Set includes storage tray

Open End, inches

106TMCO

Set Contains: 106TMCO

	Stock No.	A	C	E	F	D	
1/4	TMCO8	17/32	17/32	1/4	1/4	31/32	•
5/16	TMCO10	21/32	9/16	1/4	1/4	1 1/32	•
3/8	TMCO12	25/32	19/32	1/4	1/4	1 3/32	•
7/16	TMCO14	7/8	5/8	5/16	5/16	1 5/32	•
1/2	TMCO16	1 1/32	21/32	5/16	5/16	1 1/4	•
9/16	TMCO18	1 1/8	11/16	5/16	5/16	1 9/32	•

ASME B107.21

Set includes storage tray

Flank Drive Flare Nut, Shallow, inches, 12-Point

TMRX12



	12	A	B	C	E	Maximum Recommended Working Torque, in-lb
1/4	TMRX8	13/32	1/8	31/32	1/4	75
5/16	TMRX10	1/2	3/16	31/32	1/4	75
3/8	TMRX12	19/32	1/4	31/32	1/4	75

ASME B107.21

Flank Drive Flare Nut, Deep, inches, 12-Point

AN85088B

	12	A	B	C	E	Maximum Recommended Working Torque, in-lb
3/8	AN85086B	19/32	9/32	1/2	1/2	75
7/16	AN85087B	11/16	11/32	9/16	9/16	200
1/2	AN85088B	25/32	13/32	19/32	9/16	200
9/16	AN85089B	27/32	15/32	5/8	9/16	200

ASME B107.21

CROWFOOT WRENCHES, 3/8" DRIVE

Flank Drive Plus, Open End, inches

FCOS24



	Stock No.	A	C	D	E	F
5/8	FCOS20	1 1/4	27/32	1 19/32	7/32	17/32
3/4	FCOS24	1 17/32	1	1 29/32	1/4	17/32
15/16	FCOS30	2	1 1/8	2 1/8	23/64	43/64
1 1/16	FCOS34	2	1 3/32	2 1/8	23/64	43/64



214FC

211GFCO

Open End, inches

Stock No.	Industrial Stock No.	A	C	E	F	D	Maximum Recommended Working Torque, in-lb	Set Contains: 242FC	226FC	214FC	211FC0A	211GFCO
FC012A	GFC012A	7/8	23/32	7/32	33/64	1 19/64	75				•	•
FC014A	GFC014A	7/8	41/64	7/32	33/64	1 17/64	75	•	•	•	•	•
FC016A	GFC016A	1 1/32	51/64	7/32	33/64	1 29/64	105	•	•	•	•	•
FC018A	GFC018A	1 1/4	59/64	7/32	33/64	1 5/8	105	•	•	•	•	•
FC020A	GFC020A	1 1/4	55/64	7/32	33/64	1 19/32	125	•	•	•	•	•
FC022A	GFC022A	1 9/16	1 3/32	7/32	33/64	1 59/64	150	•	•	•	•	•
FC024A	GFC024A	1 9/16	1 1/32	7/32	33/64	1 57/64	190	•	•	•	•	•
FC026A	GFC026A	1 23/32	1 3/32	9/32	19/32	2	245	•	•	•	•	•
FC028A	GFC028A	1 23/32	1 1/32	9/32	19/32	1 31/32	300	•	•	•	•	•
FC030A	GFC030A	2	1 5/32	11/32	21/32	2 1/8	360	•	•	•	•	•
FC032A	GFC032A	2	1 5/64	11/32	21/32	2 3/32	420	•	•	•	•	•
FC34B	–	1 23/32	1 1/8	3/8	39/64	1 15/32	465	•	•	•		
FC36A	–	1 29/32	1 5/32	3/8	39/64	2 1/16	510	•	•	•		
FC38A	–	1 29/32	1 13/64	3/8	39/64	2 1/16	510	•	•	•		
FC40A	–	2 5/32	1 15/64	3/8	41/64	2 7/32	555	•	•	•		
FC42A	–	2 5/32	1 17/64	3/8	41/64	2 7/32	600	•	•			
FC44A	–	2 3/8	1 19/64	3/8	41/64	2 3/8	680	•	•			
FC46A	–	2 3/8	1 11/32	3/8	41/64	2 3/8	760	•	•			
FC48A	–	2 17/32	1 3/8	3/8	41/64	2 1/2	795	•	•			
FC50A	–	2 17/32	1 13/32	3/8	41/64	2 1/2	795	•	•			
FC52A	–	2 21/32	1 29/64	3/8	41/64	2 19/32	820	•	•			
FC54A	–	2 21/32	1 31/64	3/8	41/64	2 19/32	860	•	•			
FC56A	–	2 7/8	1 33/64	3/8	41/64	2 3/4	910	•	•			
FC58A	–	2 7/8	1 35/64	3/8	41/64	2 3/4	960	•	•			
FC60A	–	3 5/32	1 19/32	3/8	41/64	2 55/64	1,040	•	•			
FC62A	–	3 5/32	1 5/8	3/8	41/64	2 55/64	1,040	•	•			
FC64A	–	3 13/32	1 23/32	1/2	45/64	3 1/8	1,115	•	•			
FC66A	–	3 13/32	1 3/4	1/2	45/64	3 1/8	1,190	•				
FC68A	–	3 19/32	1 25/32	1/2	45/64	3 1/4	1,190	•				
FC70A	–	3 19/32	1 53/64	1/2	45/64	3 1/4	1,275	•				
FC72A	–	3 27/32	1 15/16	1/2	45/64	3 1/2	1,370	•				
FC74A	–	3 27/32	1 15/16	1/2	45/64	3 1/2	1,370	•				
FC76A	–	4 3/32	2 1/16	1/2	45/64	3 3/4	1,450	•				
FC78A	–	4 3/32	2 1/8	1/2	45/64	3 3/4	1,555	•				
FC80A	–	4 9/32	2 11/64	1/2	45/64	3 57/64	1,555	•				
FC82A	–	4 9/32	2 11/64	1/2	45/64	3 57/64	1,660	•				
FC84A	–	4 17/32	2 21/64	1/2	45/64	4 1/8	1,760	•				
FC86A	–	4 17/32	2 3/8	1/2	45/64	4 1/8	1,760	•				
FC88A	–	4 23/32	2 7/16	1/2	45/64	4 19/64	1,900	•				
FC90A	–	4 23/32	2 17/32	1/2	45/64	4 19/64	2,075	•				
FC92A	–	5 3/32	2 41/64	1/2	45/64	4 43/64	2,075	•				
FC94A	–	5 3/32	2 43/64	1/2	45/64	4 5/8	2,200	•				
FC96A	–	5 3/32	2 23/32	1/2	45/64	4 5/8	2,200	•				

ASME®/ANSI® B107.100

⚠WARNING

- Use only moderate force on crowfoot and flare nut wrenches
- Read safety precautions on pages W1 to W4

CROWFOOT WRENCHES, 3/8" DRIVE

Open End, mm

210FCOMA



Set Contains: 216FCOM / 210FCOMA*

mm	Stock No.	A	C	E	F	D	Maximum Recommended Working Torque, in-lb		
9	FCOM9A	22.4	18.8	5.3	13.2	33.3	75	•	
10	FCOM10A	22.4	17.6	5.3	13.2	33.0	75	•	•
11	FCOM11A	22.4	16.6	5.3	13.2	32.3	75	•	•
12	FCOM12A	26.2	21.0	5.3	13.2	37.3	105	•	•
13	FCOM13A	26.2	19.8	5.3	13.2	36.8	105	•	•
14	FCOM14A	26.2	18.6	5.3	13.2	36.1	105	•	•
15	FCOM15A	31.8	22.7	5.3	13.2	40.9	125	•	•
16	FCOM16A	31.8	21.7	5.3	13.2	40.4	125	•	•
17	FCOM17A	31.8	20.5	5.3	13.2	39.9	125	•	•
18	FCOM18A	38.4	27.2	6.4	13.2	48.5	170	•	•
19	FCOM19A	38.4	26.2	6.4	13.2	48.0	170	•	•
20	FCOM20A	38.4	25.0	6.4	13.2	48.0	170	•	
21	FCOM21A	43.7	27.4	7.1	15.0	48.8	250	•	
22	FCOM22A	43.7	26.4	7.1	15.0	50.0	250	•	
23	FCOM23A	50.5	30.1	8.9	16.8	54.4	390	•	
24	FCOM24A	50.5	28.8	8.9	16.8	53.8	400	•	

ASME® B107.21

*Set includes storage tray

210FRHMA



207SFRH

Flank Drive® Flare Nut, mm, 6-Point

Set Contains: 210FRHMA

mm	6	A	B	C	D	E	Maximum Recommended Working Torque, in-lb	6
9	FRHM9	22.4	6.7	14.2	33.3	9.7	150	
10	FRHM10	22.9	7.4	14.2	35.3	9.7	200	•
11	FRHM11	22.9	8.3	14.2	35.3	9.7	200	•
12	FRHM12	25.4	9.0	14.2	36.6	9.7	250	•
13	FRHM13	25.4	9.4	14.2	36.6	9.7	250	•
14	FRHM14	28.4	10.5	18.8	40.9	11.2	375	•
15	FRHM15	28.4	11.2	18.8	40.9	11.2	375	•
16	FRHM16	28.4	11.7	18.8	40.9	11.2	375	•
17	FRHM17	33.3	12.6	20.6	44.7	12.7	525	•
18	FRHM18	33.3	13.6	20.6	44.7	12.7	525	•
19	FRHM19	33.3	14.7	20.6	44.7	12.7	525	•
20	FRHM20	41.1	15.2	22.1	50.3	14.2	600	
21	FRHM21	41.1	16.3	22.1	50.3	14.2	650	
22	FRHM22	41.1	17.0	22.1	50.3	14.2	650	

ASME B107.21

Set includes storage tray

Flank Drive Flare Nut, inches, 6-Point

Set Contains: 207SFRH

11	6	A	B	C	D	E	Maximum Recommended Working Torque, in-lb	6
3/8	FRH120S	13/32	1/4	9/16	1 11/32	3/8	150	•
7/16	FRH140S	29/32	5/16	9/16	1 13/32	3/8	200	•
1/2	FRH160S	1	11/32	9/16	1 7/16	3/8	250	•
9/16	FRH180S	1 1/8	3/8	3/4	1 5/8	7/16	300	•
5/8	FRH200S	1 1/8	7/16	3/4	1 5/8	7/16	375	•
11/16	FRH220S	1 5/16	1/2	13/16	1 25/32	1/2	450	•
3/4	FRH240S	1 5/16	9/16	13/16	1 25/32	1/2	525	•
13/16	FRH260S	1 5/8	5/8	7/8	1 31/32	9/16	600	
7/8	FRH280S	1 5/8	23/32	7/8	1 31/32	9/16	675	
15/16	FRH300S	1 7/8	11/16	15/16	2 3/16	5/8	750	
1	FRH320S	1 7/8	3/4	15/16	2 3/16	5/8	825	

ASME B107.21

Set includes storage tray

205ANM



Flank Drive Flare Nut-Deep, mm, 12-Point

Set Contains: 205ANM

mm	12	A	B	C	E	
12	ANM12	18.9	8.3	16.3	15.0	•
13	ANM13	21.2	9.7	17.7	15.0	•
14	ANM14	21.2	10.5	17.7	15.0	•
17	ANM17	26.6	13.0	19.7	19.1	•
19	ANM19	29.0	14.6	20.9	19.8	•

Set includes storage tray

208AN

Flank Drive Flare Nut-Deep, inches, 12-Point

Set Contains: 208AN

11	12	A	B	C	E	Maximum Recommended Working Torque, in-lb	12
5/8	AN850810B	15/16	1/2	23/32	23/32	250	•
11/16	AN850811B	1 1/32	17/32	25/32	23/32	310	•
3/4	AN850812B	1 1/8	9/16	13/16	3/4	450	•
13/16	AN850813B	1 7/32	5/8	7/8	3/4	450	•
7/8	AN850814B	1 5/16	25/32	15/16	25/32	625	•
15/16	AN850815B	1 3/8	3/4	31/32	25/32	625	•
1	AN850816B	1 7/16	3/4	1	13/16	625	•
1 1/16	AN850817B	1 17/32	25/32	1 1/32	13/16	625	•

ASME/ANSI® B107.21

CROWFOOT WRENCHES, 3/8" DRIVE



BFCRM712A

Ratcheting, mm Blue-Point®

mm		A	C	E	Set Contains: BFCRM712A*
8	BFCRM8A	17.8	6.5	49.3	•
9	BFCRM9A	19.5	7.4	50.8	•
10	BFCRM10A	21.5	8.0	53.8	•
11	BFCRM11A	22.0	8.5	53.8	•
12	BFCRM12A	23.5	9.0	57.2	•
13	BFCRM13A	25.0	10.0	57.2	•
14	BFCRM14A	27.0	10.0	60.3	•
15	BFCRM15A	28.5	11.0	63.5	•
16	BFCRM16A	30.5	11.0	66.7	•
17	BFCRM17A	34.5	12.0	68.3	•
18	BFCRM18A	36.5	12.0	71.4	•
19	BFCRM19A	36.5	12.9	73.0	•

BFCR708A

Ratcheting, inches *Blue-Point*

		A	C	E	Set Contains: BFCR708A*
5/16	BFCR10A	11/16	1/4	2	•
3/8	BFCR12A	27/32	5/16	2 1/8	•
7/16	BFCR14A	7/8	11/32	2 1/8	•
1/2	BFCR16A	31/32	13/32	2 1/4	•
9/16	BFCR18A	1 1/16	13/32	2 3/8	•
5/8	BFCR20A	1 3/16	7/16	2 5/8	•
11/16	BFCR22A	1 1/4	15/32	2 5/8	•
3/4	BFCR24A	1 7/16	1/2	2 7/8	•

*Set includes FXLBP10 – 10" locking extension

Set includes storage tray

ADCF8

Adjustable, inches/mm

Stock No.	Drive Size	Maximum Recommended Working Torque, in-lb
ADCF8	3/8	2,849

ADCF8 Adjustable Crowfoot Wrench
- Metric and fractional scales
- Opening range from 0"–1.14" (0 mm–29 mm)
- Lateral side nut designed to work on difficult access fasteners and minimize dirt accumulation

A277

Crowfoot Wrench Holder

A277 3/8" Crowfoot Holder
- Organize and store your crowfoot wrenches
- Two-piece design snaps apart for access to desired size
- 8 3/4" long

CROWFOOT WRENCHES, 1/2" DRIVE

Open End, mm

mm		A	C	E	F	Maximum Recommended Working Torque, in-lb
20	SCOM20	40.4	42.9	7.8	15.9	1,400
21	SCOM21	40.4	42.9	7.8	15.9	1,500
22	SCOM22	44.7	44.5	8.2	15.9	1,500
23	SCOM23	48.0	44.5	8.9	15.9	1,600
24	SCOM24	46.7	44.5	8.5	15.9	1,800
25	SCOM25	51.1	45.2	8.9	15.9	1,800
26	SCOM26	53.1	45.2	9.2	15.9	1,800
27	SCOM27	53.1	44.5	9.2	15.9	2,000
28	SCOM28	53.1	43.6	9.2	15.9	2,100
30	SCOM30	59.7	44.5	9.9	15.9	2,200
32	SCOM32	62.7	50.0	10.3	15.9	2,300
34	SCOM34	62.7	51.6	10.3	15.9	2,400
35	SCOM35	69.1	50.8	11.0	15.9	2,500
36	SCOM36	69.1	50.0	11.0	15.9	2,600
38	SCOM38	75.4	50.8	11.8	15.9	2,900
40	SCOM40	75.4	51.6	11.8	15.9	3,000
41	SCOM41	81.8	50.8	12.5	15.9	3,400
42	SCOM42	81.8	50.0	12.5	15.9	3,400
46	SCOM46	91.2	51.2	13.5	15.9	4,100



SCOM32

ASME® B107.21

⚠WARNING

- Use only moderate force on crowfoot and flare nut wrenches
- Read safety precautions on pages W1 to W4

CROWFOOT WRENCHES, 1/2" DRIVE



314SCO

Open End, inches

Set Contains: 314SCO

		A	C	E	F	Maximum Recommended Working Torque, in-lb	
15/16	SCO30	1 27/32	1 15/32	11/32	5/8	1,800	
1	SCO32	1 31/32	1 11/16	23/64	5/8	1,900	
1 1/16	SCO34	2 3/32	1 3/4	3/8	5/8	2,000	•
1 1/8	SCO36	2 7/32	1 3/4	3/8	5/8	2,100	•
1 3/16	SCO38	2 11/32	1 3/4	13/32	5/8	2,200	•
1 1/4	SCO40	2 15/32	2	13/32	5/8	2,300	•
1 5/16	SCO42	2 19/32	2	7/16	5/8	2,400	•
1 3/8	SCO44	2 23/32	2	7/16	5/8	2,500	•
1 7/16	SCO46	2 27/32	2	7/16	5/8	2,600	•
1 1/2	SCO48	2 31/32	2	15/32	5/8	2,900	•
1 9/16	SCO50	2 31/32	1 31/32	15/32	5/8	3,000	
1 5/8	SCO52	3 7/32	1 31/32	1/2	5/8	3,400	•
1 11/16	SCO54	3 11/32	2 3/16	1/2	5/8	3,700	•
1 3/4	SCO56	3 15/32	2 3/16	17/32	5/8	3,900	•
1 13/16	SCO58	3 19/32	2 3/16	17/32	5/8	4,100	•
1 7/8	SCO60	3 23/32	2 3/16	9/16	5/8	4,300	•
2	SCO64	3 31/32	2 7/32	9/16	5/8	5,000	•
2 1/8	SCO68	3 31/32	2 7/32	37/64	5/8	5,000	
2 1/4	SCO72	3 31/32	2 13/32	37/64	5/8	5,000	
2 3/8	SCO76	4 3/8	2 31/64	19/32	5/8	5,000	
2 7/16	SCO78	4 3/8	2 7/16	19/32	5/8	5,000	
2 1/2	SCO80	4 3/8	2 13/32	19/32	5/8	5,000	

ASME® B107.21

Flank Drive® Flare Nut, Deep, inches, 12-Point



315AN

Set Contains: 315AN

	12	A	B	C	E	Maximum Recommended Working Torque, in-lb	12
1 1/8	AN850818B	1 5/8	27/32	1 5/32	7/8	825	•
1 3/16	AN850819B	1 11/16	29/32	1 3/16	7/8	825	•
1 1/4	AN850820B	1 25/32	15/16	1 7/32	7/8	825	•
1 5/16	AN850821B	1 27/32	31/32	1 1/4	7/8	900	•
1 3/8	AN850822B	1 15/16	1 1/16	1 5/16	15/16	900	•
1 7/16	AN850823B	2	1 1/16	1 11/32	15/16	900	•
1 1/2	AN850824B	2 3/32	1 1/8	1 3/8	15/16	900	•
1 9/16	AN850825B	2 5/32	1 5/32	1 13/32	15/16	900	•
1 5/8	AN850826B	2 7/32	1 7/32	1 7/16	15/16	1,100	•
1 11/16	AN850827B	2 5/16	1 5/16	1 1/2	1 1/32	1,100	•
1 3/4	AN850828B	2 3/8	1 5/16	1 9/16	1 1/32	1,150	•
1 13/16	AN850829B	2 15/32	1 11/32	1 19/32	1 1/32	1,200	•
1 7/8	AN850830B	2 9/16	1 3/8	1 21/32	1 1/16	1,200	•
1 15/16	AN850831B	2 5/8	1 7/16	1 11/16	1 1/16	1,200	•
2	AN850832B	2 23/32	1 9/16	1 23/32	1 1/16	1,400	•
2 1/8	AN850834B	2 7/8	1 9/16	1 13/16	1 1/8	1,450	
2 3/16	AN850835B	2 15/16	1 21/32	1 27/32	1 1/8	1,500	
2 1/4	AN850836B	3 1/32	1 11/16	1 7/8	1 1/8	1,500	
2 3/8	AN850838B	3 3/16	1 13/16	1 31/32	1 3/16	1,600	
2 7/16	AN850839B	3 1/4	1 13/16	2	1 3/16	1,650	
2 9/16	AN850841B	3 7/16	1 29/32	2 3/32	1 9/32	1,750	
2 5/8	AN850842B	3 1/2	2 1/16	2 1/8	1 9/32	1,800	
2 11/16	AN850843B	3 19/32	2 1/16	2 5/32	1 9/32	1,800	
2 3/4	AN850844B	3 21/32	2 1/16	2 7/32	1 9/32	1,850	
3 1/8	AN850850B	4 1/8	2 5/16	2 7/16	1 5/16	2,000	

ASME B107.21



Flank Drive® Straight Handle Sledge Hammer, inches, 12-Point

Set Contains: DX634

	mm	12	A	B	C	12
1 3/16	—	DX138A	7/8	2 3/32	7 35/64	•
1 1/4	—	DX140A	7/8	2 3/32	7 35/64	•
1 5/16	—	DX142A	7/8	2 3/32	7 35/64	•
1 3/8	—	DX144A	61/64	2 17/64	7 41/64	•
1 7/16	—	DX146A	61/64	2 17/64	7 41/64	•
1 1/2	—	DX148A	61/64	1 17/64	7 41/64	•
1 5/8	—	DX152A	1 9/64	2 5/8	7 53/64	•
1 11/16	—	DX154A	1 9/64	2 5/8	7 53/64	•
1 3/4	—	DX156A	1 7/32	2 13/16	7 29/32	•
1 13/16	—	DX158A	1 7/32	2 13/16	7 29/32	•
1 7/8	—	DX160A	1 7/32	2 13/16	7 29/32	•
—	50	DXM50	1 13/32	3 11/64	11 19/32	•
2	—	DX164A	1 13/32	3 11/64	11 19/32	•
2 1/16	—	DX166A	1 13/32	3 11/64	11 19/32	•
2 3/16	—	DX170A	1 17/32	3 29/64	11 47/64	•
2 1/4	—	DX172A	1 17/32	3 29/64	11 47/64	•
2 3/8	—	DX176A	1 21/32	3 23/32	11 55/64	•
2 7/16	—	DX178A	1 21/32	3 23/32	11 55/64	•
2 1/2	—	DX180A	1 21/32	3 23/32	11 55/64	•
2 9/16	—	DX182A	1 51/64	3 63/64	13	•
2 5/8	—	DX184A	1 51/64	3 63/64	13	•
2 3/4	—	DX188A	1 59/64	4 17/64	14 17/64	•
2 13/16	—	DX190A	1 59/64	4 17/64	14 17/64	•
2 15/16	—	DX194A	2 3/64	4 17/32	14 13/32	•
3	—	DX196A	2 3/64	4 17/32	14 13/32	•
3 1/8	—	DX1100A	2 17/64	4 29/32	17 37/64	•
3 3/8	—	DX1108A	2 17/64	4 29/32	17 37/64	•
3 1/2	—	DX1112A	2 29/64	5 19/64	17 51/64	•
3 3/4	—	DX1120A	2 21/32	5 17/32	17 51/64	•
3 7/8	—	DX1124A	2 21/32	5 17/32	17 57/64	•
4 1/8	—	DX1132A	2 59/64	6 1/32	18 9/64	•
4 1/4	—	DX1136A	2 59/64	6 1/32	18 9/64	•
4 1/2	—	DX1144A	3 5/32	6 25/32	20 1/64	•
4 5/8	—	DX1148A	3 5/32	6 25/32	20 1/64	•

DX158A

ASME® B107.100

Slugging Wrench Retainers

Set Contains: HTX100P

Stock No.	Description	A	B	C	D	
HTX24	Retainer for 3/4" studs	3/8	1 29/32	1 15/16	1 3/4	•
HTX28	Retainer for 7/8" studs	7/8	2	2 3/16	1 29/32	•
HTX32	Retainer for 1" studs	1	2 1/8	2 1/2	2 1/32	•
HTX36	Retainer for 1 1/8" studs	1 1/8	2 1/4	2 1/2	2 5/32	•
HTX40	Retainer for 1 1/4" studs	1 1/4	2 3/8	2 7/8	2 9/32	•
HTX44	Retainer for 1 3/8" studs	1 3/8	2 15/32	3 1/8	2 3/8	•
HTX48	Retainer for 1 1/2" studs	1 1/2	2 5/8	3 1/8	2 1/2	•
HTX52	Retainer for 1 5/8" studs	1 5/8	2 3/4	3 5/8	2 21/32	•
HTX56	Retainer for 1 3/4" studs	1 3/4	2 7/8	3 7/8	2 3/4	•
HTX60	Retainer for 1 7/8" studs	1 7/8	3	4 1/2	2 7/8	•

HTX100P



HTX52

⚠WARNING

- Use only moderate force on crowfoot and flare nut wrenches
- Read safety precautions on pages W1 to W4

HEAVY DUTY STRIKING WRENCHES

HX400B



Flank Drive® Offset Handle Sledge Hammer, inches, 12-Point

						Set Contains: HX635
	mm	12	A	B	C	12
1 1/16	27	**HX340A**	11/16	1 5/8	10	•
1 1/8	—	**HX360A**	3/4	1 15/16	11	•
1 3/16	30	**HX380A**	3/4	1 15/16	11	•
1 1/4	32	**HX400B**	3/4	1 15/16	11	•
1 5/16	33	**HX420A**	3/4	1 15/16	11	•
1 3/8	35	**HX440A**	7/8	2 1/8	11 1/2	•
1 7/16	36	**HX460A**	7/8	2 1/8	11 1/2	•
1 1/2	38	**HX480A**	1	2 7/16	12	•
1 5/8	41	**HX520A**	1	2 7/16	12	•
1 11/16	43	**HX540A**	1 1/8	2 5/8	12 1/2	•
1 3/4	44	**HX560A**	1 1/8	2 5/8	12 1/2	•
1 13/16	46	**HX580A**	1 1/8	2 5/8	12 1/2	•
1 7/8	47	**HX600A**	1 1/4	2 7/8	13	•
1 15/16	49	**HX620A**	1 1/2	2 7/8	13	•
—	50	**HXM50**	1 1/4	2 7/8	13	•
2	51	**HX640A**	1 1/4	2 7/8	13	•
2 1/8	—	**HX680A**	1 3/8	3 1/4	13 9/16	•
2 3/16	55	**HX700A**	1 3/8	3 1/4	13 9/16	•
2 1/4	57	**HX720A**	1 3/8	3 1/4	13 9/16	•
2 5/16	59	**HX740A**	1 3/8	3 1/4	13 9/16	•
2 3/8	60	**HX760A**	1 1/2	3 5/8	14 1/8	•
2 1/2	64	**HX800A**	1 1/2	3 5/8	14 1/8	•
2 9/16	65	**HX820A**	1 1/2	3 5/8	14 1/8	•
2 5/8	67	**HX840A**	1 5/8	3 15/16	15	•
2 3/4	70	**HX880A**	1 5/8	3 15/16	15	•
2 7/8	73	**HX920A**	1 3/4	4 7/16	16	•
2 15/16	75	**HX940A**	1 3/4	4 7/16	16	•
3	76	**HX960A**	1 3/4	4 7/16	16	•
3 1/8	80	**HX1000A**	1 3/4	4 7/16	16	•
3 3/8	85	**HX1080A**	2	6 1/4	18 1/4	•
3 1/2	89	**HX1120A**	2	6 1/4	18 1/4	•
3 3/4	95	**HX1200A**	2	6 1/4	18 1/4	•
3 7/8	98	**HX1240A**	2	6 1/4	18 1/4	•
4 1/8	105	**HX1320A**	2	6 1/4	18 1/4	•
4 1/4	108	**HX1360A**	2	6 1/4	18 1/4	•

Open End Tubular Wrenches, inches/mm

	mm	Stock No.	A	B	C	Fits Handle No.
7/8	—	**OE128C**	1/2	1 15/16	10 1/2	13B or 24B
15/16	—	**OE130C**	1/2	1 15/16	10 1/2	13B or 24B
1	—	**OE132C**	9/16	2 5/16	11 5/16	13B or 24B
1 1/16	27	**OE134C**	9/16	2 5/16	11 5/16	13B or 24B
1 1/8	—	**OE136C**	9/16	2 5/16	11 1/4	13B or 24B
1 1/4	32	**OE140C**	5/8	2 3/4	12 5/16	13B or 24B
1 5/16	33	**OE142C**	5/8	2 3/4	12 5/16	13B or 24B
1 3/8	35	**OE144B**	5/8	2 3/4	12 1/4	13B or 24B
1 7/16	36	**OE146C**	11/16	3 1/8	13 1/4	13B or 24B
1 1/2	38	**OE148C**	11/16	3 1/8	13 5/16	13B or 24B

ASME® B107.100

OE148C

Tubular Handles

Stock No.	A	B	Size, inches
13B	13 1/2	7/8	13
24B	24	7/8	24
36B	36	1 9/64	36

13B



Flank Drive® Straight Box, inches/mm

	mm	12	A	B	C	Fits Handle No.
3/4	—	**XH124C**	1/2	1 1/4	10 13/16	13B or 24B
13/16	—	**XH126C**	1/2	1 1/4	10 13/16	13B or 24B
7/8	—	**XH128C**	5/8	1 7/16	10 15/16	13B or 24B
15/16	—	**XH130C**	5/8	1 7/16	10 15/16	13B or 24B
1	—	**XH132C**	11/16	1 9/16	11	13B or 24B
1 1/16	27	**XH134C**	11/16	1 9/16	11	13B or 24B
1 1/8	—	**XH136C**	11/16	1 11/16	11 1/8	13B or 24B
1 1/4	32	**XH140C**	3/4	1 15/16	13 1/2	13B or 24B
1 5/16	33	**XH142C**	3/4	1 15/16	13 1/2	13B or 24B
1 7/16	36	**XH146C**	7/8	2 3/16	13 5/8	13B or 24B
1 1/2	38	**XH148C**	7/8	2 3/16	13 3/4	13B or 24B
1 5/8	41	**XH152C**	15/16	2 3/8	13 3/4	13B or 24B
3 1/8	79	**XH1100C**	1 3/4	4 15/16	14 7/8	36B

ASME B107.100

XH124C

COMBINATION T- AND L-SHAPED WRENCHES

- Ergonomic, soft grip handle provides comfort during repetitive tasks
- Delivers superior turning power
- Allows maximum pressure to be applied when loosening difficult fasteners with both “T” and “L” applications
- Blades constructed from high strength steel and hardened for durability
- Blade tips are black oxide coated to prevent chipping and to help maintain a secure fastener engagement
- Short blade provides maximum torque for tight quarters
- Long blade promotes quick fastener turning in difficult access situations
- Hole in handle for hanging tool or tether
- Color coded handles identify metric and inch sizes at a glance

AWSGM800

Hex, mm

mm	Blue Handle	T-Length, mm	Length, mm	Set Contains: AWSGM800
2	AWSGM2	95	152	•
2.5	AWSGM2.5	95	152	•
3	AWSGM3	98	152	•
4	AWSGM4	98	187	•
5	AWSGM5	117	187	•
6	AWSGM6	117	246	•
8	AWSGM8	117	246	•
10	AWSGM10	124	248	•

Set includes storage tray

AWSG800

Hex, inches

	Red Handle	T-Length, inches	Length, inches	Set Contains: AWSG800
3/32	AWSG06	3 7/8	6	•
7/64	AWSG07	3 7/8	6	•
1/8	AWSG08	3 7/8	6	•
9/64	AWSG09	3 7/8	6	•
5/32	AWSG10	3 7/8	7 3/8	•
3/16	AWSG12	4 3/4	7 3/4	•
7/32	AWSG14	4 3/4	7 3/4	•
1/4	AWSG16	4 3/4	9 5/8	•
5/16	AWSG20	4 3/4	9 5/8	
3/8	AWSG24	4 3/4	9 5/8	

Set includes storage tray

AWBSGM800

Ball Hex, mm

mm	Blue Handle	T-Length, mm	Length, mm	Set Contains: AWBSGM800
2	AWBSGM2	95	152	•
2.5	AWBSGM25	95	152	•
3	AWBSGM3	98	152	•
4	AWBSGM4	98	187	•
5	AWBSGM5	117	187	•
6	AWBSGM6	117	246	•
8	AWBSGM8	117	246	•
10	AWBSGM10	124	248	•

Set includes storage tray

AWBSG800

Ball Hex, inches

	Red Handle	T-Length, inches	Length, inches	Set Contains: AWBSG800
3/32	AWBSG06	3 7/8	6	•
7/64	AWBSG07	3 7/8	6	•
1/8	AWBSG08	3 7/8	6	•
9/64	AWBSG09	3 7/8	6	•
5/32	AWBSG10	3 7/8	7 3/8	•
3/16	AWBSG12	4 3/4	7 3/4	•
7/32	AWBSG14	4 3/4	7 3/4	•
1/4	AWBSG16	4 3/4	9 5/8	•
5/16	AWBSG20	4 3/4	9 5/8	
3/8	AWBSG24	4 3/4	9 5/8	

Set includes storage tray

AWSGTRP20

AWSGT800

TORX Plus® Special Application

#	Green Handle	T-Length, inches	Length, inches
T20	AWSGTRP20	3 7/8	10 1/2

- Extra long T20 tamper-resistant *TORX Plus*
- Access mirrors on Mercedes® vehicles
- Short end also T20 tamper-resistant *TORX* for tight quarters

TORX®

Set Contains: AWSGT800

#	Green Handle	T-Length, inches	Length, inches	
T6	AWSGT6	3 7/8	6	
T7	AWSGT7	3 7/8	6	
T8	AWSGT8	3 7/8	6	
T9	AWSGT9	3 7/8	6	
T10	AWSGT10	3 7/8	6	•
T15	AWSGT15	3 7/8	7 3/8	•
T20	AWSGT20	3 7/8	7 3/8	•
T25	AWSGT25	4 3/4	7 5/8	•
T27	AWSGT27	4 3/4	7 5/8	•
T30	AWSGT30	4 3/4	9 5/8	•
T40	AWSGT40	4 3/4	9 5/8	•
T45	AWSGT45	4 3/4	9 3/4	•
T50	AWSGT50	4 3/4	9 3/4	

Set includes storage tray

T-SHAPE

AWBMCG1600

Ball Hex, mm

Set Contains: AWBMCG1600

mm	Blue Handle 228 mm Length	
2	AWBMCG1602	•
2.5	AWBMCG16025	•
3	AWBMCG1603	•
4	AWBMCG1604	•
5	AWBMCG1605	•
6	AWBMCG1606	•
8	AWBMCG1608	•
10	AWBMCG1610	•

AWBCG1600

Ball Hex, inches

Set Contains: AWBCG1600

	Red Handle 9" Length	
3/32	AWBCG1606	•
7/64	AWBCG1607	•
1/8	AWBCG1608	•
9/64	AWBCG1609	•
5/32	AWBCG1610	•
3/16	AWBCG1612	•
7/32	AWBCG1614	•
1/4	AWBCG1616	•
5/16	AWBCG1620	
3/8	AWBCG1624	

Tamper Resistant, mm

AWMCGR1608
Metric T-Shape Hex Wrench

- Yamaha® Rhino doors and aftermarket license plate holders with 8 mm tamper-proof hex security fasteners
- Permits maximum pressure application when loosening difficult fasteners

AWMCGR1608

AWCGT500

TORX

Set Contains: AWCGT500

#	Green Handle 6" Length	
T7	AWCGT7	
T8	AWCGT8	•
T10	AWCGT10	•
T15	AWCGT15	•
T20	AWCGT20	•
T25	AWCGT25	•
T30	AWCGT30	
T40	AWCGT40	
T45	AWCGT45	

⚠WARNING

- Plastic handle does not protect against electric shock
- Read safety precautions on pages W1 to W4

T-SHAPE

AWMCG1600B

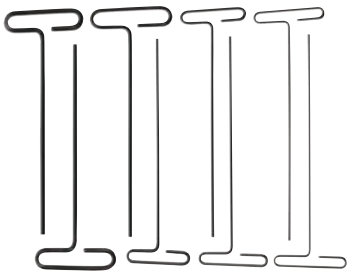

GAW1900A

AWCG1600B

Hex, mm

mm	Blue Handle 152 mm Length	AWMCG1600B Set Contains:
2	AWMCG1602B	•
2.5	AWMCG16025B	•
3	AWMCG1603B	•
4	AWMCG1604B	•
5	AWMCG1605B	•
6	AWMCG1606B	•
8	AWMCG1608B	•
10	AWMCG1610B	•

Hex, inches

"	Standard Handle 9" Length	Red Handle 6" Length	GAW1900A Set Contains:	AWCG1600B Set Contains:
3/32	GAW1906	AWCG1606B	•	•
7/64	GAW1907	AWCG1607B	•	•
1/8	GAW1908	AWCG1608B	•	•
9/64	GAW1909	AWCG1609B	•	•
5/32	GAW1910	AWCG1610B	•	•
3/16	GAW1912	AWCG1612B	•	•
7/32	GAW1914	AWCG1614B	•	•
1/4	GAW1916	AWCG1616B	•	•
5/16	GAW1920	AWCG1620B		
3/8	GAW1924	AWCG1624B		

AWSTAND
Tools not included with AWSTAND

AWSTAND

Wrench Stands

AWSTAND Wrench Stand

- Mounting holes on top and bottom of stand provide many mounting locations
- Another AWSTAND can be added for increased storage options
- Stands can mount to a Slots-N-Dots™ Plus personal work center or lie flat on top of toolbox
- Stand holds the following wrench styles:
  - L- or T-shaped fractional hex 1/16"–3/8"
  - L- or T-shaped metric hex 2 mm–10 mm
  - L- or T-shaped TORX® T6–T50
  - Metric or *TORX* on one stand
  - Fractional and metric on one stand
  - Metric and fractional ball wrenches

FOLDING SETS

AWMEF7K



AWMEF8K

AWMEF6K

Hex, mm

mm	AWMEF7K	AWMEF8K	AWMEF6K
	A	A	A
1.5	45.7	—	—
2	50.8	50.8	—
2.5	55.9	55.9	—
3	61.0	61.0	83.8
4	66.0	66.0	88.9
5	78.7	78.7	96.5
6	83.8	96.5	101.6
7	—	106.7	—
8	—	121.9	121.9
10	—	—	129.5

AWEF6K

AWEF9K

AWTEF8K

AWEFBH9K

Hex, inches

AWEF6K		AWEF9K	
	A		A
5/32	2.7	0.05	1.8
3/16	3.3	1/16	1.9
7/32	3.5	5/64	2.0
1/4	3.7	3/32	2.1
5/16	4.8	7/64	2.3
3/8	5.1	1/8	2.4
		9/64	2.6
		5/32	2.7
		3/16	2.9

TORX®

AWTEF8K	
	A
T8	2.4
T10	2.7
T15	3.0
T20	3.2
T25	3.4
T27	3.5
T30	3.7
T40	3.9

Ball Hex, inches

AWEFBH9K	
	A
5/64	2.0
3/32	2.1
7/64	2.3
1/8	2.4
9/64	2.6
5/32	2.7
3/16	2.9
7/32	3.5
1/4	3.7

AWCPEF16K Combination Set
Set includes **AWEF9K** hex set and **AWMEF7K** metric hex set

Combination

AWHD8K Hex/*TORX* Set
Includes two *TORX* sizes (T27, T40) and six hex sizes (5/32", 3/16", 7/32", 1/4", 5/16" and 3/8"). Fits a wide range of Harley-Davidson® motorcycles.

AWEF6M6K Fractional/Metric Hex Folding Set
- Turn and flip feature eliminates the need for constant removal of tool to reposition it in screw head when working next to obstructions
- 90° stops turn the tool into a speed wrench
- Hex sizes molded into storage case for easy identification of each hex
- Flutes in storage case allow easy selection
- Access the blades from top or bottom, eliminating the need to unstack the blades
- High torque steel 20% stronger and twice the wear resistance of standard grades of steel
- Handle is 40% stronger than steel cases
- Corrosion resistant finish is five times more resistant than the competition

AWHD8K

AWEF6M6K

L-SHAPED

Ball Hex, inches

Industrial Finish L-Shaped Ball Hex Wrench Sets:
Ball hex allows up to 25° angle entry. Made from high strength steel.

BHS7A Ball Hex Set
Set includes 5/64", 3/32", 7/64", 1/8", 9/64", 5/32" and 3/16" sizes (7pc) (5/64"–3/16") in plastic index.

BHS13A Ball Hex Set
Set includes 0.05", 1/16", 5/64", 3/32", 7/64", 1/8", 9/64", 5/32", 3/16", 7/32", 1/4", 5/16" and 3/8" sizes (13pc) (.050"–3/8") in plastic index.

AWBPH13 Ball Hex Set
Screw holding tip holds fastener to tool for delicate installations. Set includes 0.05", 1/16", 5/64", 3/32", 7/64", 1/8", 9/64", 5/32", 3/16", 7/32", 1/4", 5/16" and 3/8" sizes (13pc) (.050"–3/8") in plastic index.

AWBS13 Stubby Ball Hex Set
Stubby length for access to tight quarters. Set includes 0.05", 1/16", 5/64", 3/32", 7/64", 1/8", 9/64", 5/32", 3/16", 7/32", 1/4", 5/16" and 3/8" sizes (13pc) (.050"–3/8") in plastic index.

AWBXL13 Extra Long Ball Hex Set
Set includes sizes: 0.05", 1/16", 5/64", 3/32", 7/64", 1/8", 9/64", 5/32", 3/16", 7/32", 1/4", 5/16" and 3/8".

Unique Screw Holding Tip*
Holds fastener to tool for delicate installations
*AWBPH13 set only



BHS7A

BHS13A

AWBS13

AWBPH13

AWBXL13

⚠WARNING

- Plastic handle does not protect against electric shock
- Read safety precautions on pages W1 to W4

L-SHAPED

Unique Screw Holding Tip*
Holds fastener to tool for delicate installations
*AWMBPH9 set only

BHM9A

AWMBPH9

AWMBS9

AWBMXL9

Ball Hex, mm

Industrial Finish L-Shaped Ball Hex Wrench Sets:
Ball hex allows up to 25° angle entry. Made from high strength steel.

BHM9A Metric Ball Hex Set
Set includes 1.5 mm, 2 mm, 2.5 mm, 3 mm, 4 mm, 5 mm, 6 mm, 8 mm and 10 mm sizes (9pc) (1.5 mm–10 mm) in plastic index.

AWMBPH9 Metric Ball Hex Set
Screw holding tip holds fastener to tool for delicate installations. Set includes 1.5 mm, 2 mm, 2.5 mm, 3 mm, 4 mm, 5 mm, 6 mm, 8 mm and 10 mm sizes (9pc) (1.5 mm–10 mm) in plastic index.

AWMBS9 Metric Stubby Ball Hex Set
Stubby length for access in tight quarters. Set includes 1.5 mm, 2 mm, 2.5 mm, 3 mm, 4 mm, 5 mm, 6 mm, 8 mm and 10 mm sizes (9pc) (1.5 mm–10 mm) in plastic index.

AWBMXL9 Metric Extra Long Ball Hex Set
Set includes: 1.5 mm, 2 mm, 2.5 mm, 3 mm, 4 mm, 5 mm, 6 mm, 8 mm and 10 mm sizes.



AWM110DHK

AW1013DK

Hex, mm

	Stock No.	mm	A	Set Contains: AWM140DK	AWM110DK	AWM110DHK
Standard Length	AWM2D	2	47.7	•	•	•
	AWM2-1/2D	2.5	52.0	•	•	•
	AWM3D	3	58.6	•	•	•
	AWM4D	4	65.6	•	•	•
	AWM5D	5	75.6	•	•	•
	AWM6D	6	82.2	•	•	•
	AWM7D	7	92.4	•	•	•
	AWM8D	8	99.2	•	•	•
	AWM9D	9	105.1	•	•	•
	AWM10D	10	111.4	•	•	•
	AWM12D	12	139.3	•	•	•
	AWM14D	14	138.8	•		
	AWM17D	17	167.2	•		
	AWM19D	19	193.6	•		
Long	AWML1.5D	1.5	77.7			
	AWML2D	2	83.0			
	AWML2.5D	2.5	89.8			
	AWML3D	3	100.0			
	AWML4D	4	107.0			
	AWML5D	5	118.5			
	AWML6D	6	141.0			
	AWML8D	8	161.5			
	AWML10D	10	172.0			
	AWML12D	12	193.6			
	Kit Bag			C1209	C15B	
	Metal Index					BHK11

Hex, inches

Stock No.		A	Set Contains: AW1020DK	AW1015DK	AW1013DK	AW1015DHK
AW028D	0.028	1 1/4	•	•		•
AW035D	0.035	1 5/16	•	•		•
AW050D	0.050	1 3/4	•	•	•	•
AW2D	1/16	1 3/4	•	•	•	•
AW2-1/2D	5/64	1 7/8	•	•	•	•
AW3D	3/32	2	•	•	•	•
AW3-1/2D	7/64	2 1/8	•	•	•	•
AW4D	1/8	2 1/4	•	•	•	•
AW4-1/2D	9/64	2 3/8	•	•	•	•
AW5D	5/32	2 1/2	•	•	•	•
AW6D	3/16	2 3/4	•	•	•	•
AW7D	7/32	3	•	•	•	•
AW8D	1/4	3 1/4	•	•	•	•
AW10D	5/16	3 3/4	•	•	•	•
AW12D	3/8	4 1/4	•	•	•	•
AW14D	7/16	4 3/4	•			
AW16D	1/2	5 1/4	•			
AW18D	9/16	5 3/4	•			
AW20D	5/8	6 1/4	•			
AW24D	3/4	7 1/4	•			
Kit Bag			C1209	C154		
Metal Index						BHK15

AWL1010DHK

Hex, Long, inches

Stock No.		A	AWL1010DK	AWL1010DHK
			Set Contains:	
AWL3D	3/32	3 1/8	•	•
AWL3-1/2D	7/64	3 1/2	•	•
AWL4D	1/8	3 3/4	•	•
AWL4-1/2D	9/64	4	•	•
AWL5D	5/32	4 1/8	•	•
AWL6D	3/16	4 1/2	•	•
AWL7D	7/32	4 7/8	•	•
AWL8D	1/4	5 1/4	•	•
AWL10D	5/16	6	•	•
AWL12D	3/8	6 3/4	•	•
AWL14D	7/16	7 1/2		
AWL16D	1/2	8 1/4		
AWL18D	9/16	9		
AWL20D	5/8	9 3/4		
Kit Bag			C15B	
Metal Index				BHK10



AWT100KA

AWTPH8

TORX®

Stock No.	#	A	B	AWT100KA
				Set Contains:
AWT8A	T8	.137	1 7/8	
AWT9A	T9	.148	1 7/8	
AWT10A	T10	.162	2	•
AWT15A	T15	.194	2 1/8	•
AWT20A	T20	.228	2 1/4	•
AWT25A	T25	.262	2 3/8	•
AWT27A	T27	.295	2 1/2	•
AWT30A	T30	.218	2 3/4	•
AWT40A	T40	.262	3	•
AWT45A	T45	.430	3 5/8	•
AWT50A	T50	.348	3 3/4	•
AWT55A	T55	.442	4 1/4	•

AWTPH8 *TORX* Set
Set includes T9, T10, T15, T20, T25, T27, T30 and T40 sizes (8pc) (T9–T40) in plastic index. Made from high torque steel.

TORX Tamper Resistant

AWTR8

Stock No.	#	AWTR8
		Set Contains:
AWTR8-1	T9	•
AWTR8-2	T10	•
AWTR8-3	T15	•
AWTR8-4	T20	•
AWTR8-5	T25	•
AWTR8-6	T27	•
AWTR8-7	T30	•
AWTR8-8	T40	•

AWMG9

AWS13

Hex/Gold Finish, mm

Stock No.	mm	AWMG9
		Set Contains:
AWMG9-1	1.5	•
AWMG9-2	2	•
AWMG9-3	2.5	•
AWMG9-4	3	•
AWMG9-5	4	•
AWMG9-6	5	•
AWMG9-7	6	•
AWMG9-8	8	•
AWMG9-9	10	•

Hex/Natural Finish, inches

Stock No.		AWS13
		Set Contains:
AWS13-1	1/20	•
AWS13-2	1/16	•
AWS13-3	5/64	•
AWS13-4	3/32	•
AWS13-5	7/64	•
AWS13-6	1/8	•
AWS13-7	9/64	•
AWS13-8	5/32	•
AWS13-9	3/16	•
AWS13-10	7/32	•
AWS13-11	1/4	•
AWS13-12	5/16	•
AWS13-13	3/8	•

MS1015KA

Multi-Spline

Stock No.	A	B	MS1015KA
			Set Contains:
MS2A	4	.033	•
MS3A	4	.048	•
MS4A	6	.060	•
MS5A	4	.069	•
MS6A	4	.076	•
MS7A	6	.072	•
MS8A	6	.096	•
MS10A	6	.110	•
MS16A	6	.144	•
MS20A	6	.183	•
MS24A	6	.216	•
MS28A	6	.251	•
MS32A	6	.291	•
MS40A	6	.372	•
MS48A	6	.454	•

Set includes C16 kit bag, wrenches are not pre-packaged in kit bag

WARNING • Read safety precautions on pages W1 to W4

ADJUSTABLE





Flank Drive® Plus Adjustable/Cushion Handles

- Adjustable wrenches with serrated jaws feature our *Flank Drive* Plus wrenching system for more turning power from an adjustable wrench
- Precision-made wrenches feature fractional and metric scales for size reference
- Elastomer handle surface is soft, yet provide a nonslip gripping surface even for greasy and oily hands
- Cushion handle insulates against cold temperatures

FADH704A

Stock No.	A inches (mm)	B inches (mm)	Set Contains: FADH704A	FADH702
FADH6A	6 (152)	3/4 (19)	•	
FADH8A	8 (203)	15/16 (24)	•	•
FADH10A	10 (254)	1 1/8 (29)	•	
FADH12A	12 (304)	1 5/16 (33)	•	•

ASME® Standard

Set includes storage tray

Adjustable Wrenches

- Opposing fractional and metric quick sizing scales are provided for convenience
- High strength alloy steel machined to exacting specs and precision heat treated for strength and durability
- Nickel-chrome finish helps protect against corrosion and speeds cleanup

AD704A

Stock No.	A inches (mm)	B inches (mm)	Set Contains: AD704A
AD6A	6 (155)	25/32 (20)	•
AD8A	8 (205)	1 1/16 (27)	•
AD10A	10 (255)	1 3/16 (30)	•
AD12A	12 (305)	1 11/32 (34)	•

ASME B107.100

Set includes storage tray

Wide Mouth Adjustable/Cushion Handle

- Opens larger than standard adjustable wrench
- Longer jaws and slimline design for greater reach
- Metric and fractional scales for quick observation
- Adjustable moving jaw will not fall out, even when at max opening
- Elastomer handle is soft, insulates against cold and provides a nonslip surface
- ADHW6 opens as wide as an 8" adjustable wrench; ADHW8 opens as wide as a 10" adjustable wrench

ADHW8

Stock No.	A inches (mm)	B inches (mm)
ADHW6	6 (152)	1 1/4 (32)
ADHW8	8 (203)	1 1/2 (38)

ASME B107.100



External Pipe Wrenches

PW10C

PWA10A

Stock No. Coated Handle	Stock No. Aluminum Handle	A	B Max Opening
PW6C	–	6	3/4
PW8C	–	8	1
PW10C	**PWA10A**	10	1 1/2
PW12C	–	12	2
PW14C	**PWA14A**	14	2
PW18C	**PWA18A**	18	2 1/2
PW24C	**PWA24A**	24	3
PW36C	**PWA36A**	36	5

Pliers Wrench

- Inwardly angled teeth for a stronger grip
- Quick adjustment of grip width
- Built-in guard against unthreading
- Soft, high-friction handle surfaces with a strong, stable core



Stock No.	A	B	C	D	Weight, lb
PWZ0	8 3/16	1 1/2	5/16	9/16	1
PWZ1	12 5/8	1 3/4	1/2	3/4	1 5/8
PWZ2	17	2 1/2	5/8	13/16	2 1/2
PWZ3	21 1/2	3 1/2	3/4	1	6 3/8

PWZ1

ADJUSTABLE Blue-Point®



Adjustable Wrenches

- Inch and metric scales on fixed jaw indicate wrench opening
- Fixed jaw and handle forged in one piece to ensure maximum strength
- Wrench is balanced to minimize wrist stress
- Hole at handle end for tether or hanging

Stock No.	A inches (mm)	B inches (mm)	Set Contains: BLPADJ703	Set Contains: BLPADJ404*
GAJ4A	4 (108)	1/2 (13)		
GAJ6A	6 (160)	1 (25.4)		•
GAJ8A	8 (210)	1 1/8 (29)		•
GAJ10A	10 (260)	1 9/32 (33)		•
GAJ12A	12 (310)	1 1/2 (38)		•
GAJ15A	15 (385)	1 19/32 (43)	•	
GAJ18A	18 (450)	2 1/16 (52)	•	
GAJ24A	24 (610)	2 7/16 (62)	•	
GAJS30**	30 (778)	3 11/32 (85)		
GAJS30A	30 (778)	3 11/32 (85)		

BLPADJ404

GAJS30 GAJS30A

ASME® B107.10

*Set includes storage tray

**Side adjusting nut style provides smoother operation, allows greater jaw opening and offers minimum jaw play

Adjustable Wrenches/Soft Grip

Stock No.	A inches (mm)	B inches (mm)	Set Contains: BLPADJ404SG
GAJ6SG	6 (160)	1 (25.4)	•
GAJ8SG	8 (210)	1 1/8 (29)	•
GAJ10SG	10 (260)	1 9/32 (32.8)	•
GAJ12SG	12 (310)	1 1/2 (38)	•

Set includes storage tray

BLPADJ404SG

Aluminum (for "AN" Fittings)

- Securely tighten expensive AN fittings to reduce risk of damage in aircraft, marine and industrial applications as well as for race and show cars
- Machined from aluminum billet to exacting tolerances and made from quality heat-treated aluminum

Stock No.	Color	A inches (mm)	B inches (mm)
ANADJ8A	Red	8 (203)	AN #10 (1")

ANADJ8A

⚠WARNING

- Do not use "cheater bars" on handles
- Plastic handle does not protect against electric shock
- Read safety precautions on pages W1 to W4

SPECIAL APPLICATION

N6893B

Valve Persuader (Special order only)

N6893B Valve Persuader Wrench

- Persuader end provides extra leverage on valve wheels
- Hooks around valve stems and protrudes through spokes
- 15" long
- Opening is 1 1/4"

304APSK



Adjustable Pin Spanners

- Removes rings, collars and lock nuts
- Make sure jaw hook is properly aligned when in use

Stock No.	A	B	C	D	E	Set Contains: 304APSK
APS351B	3/4–2	1/8	6 3/8	1/8	11/32	•
APS357B	1 1/4–3	3/16	8 1/8	3/16	11/32	•
APS363B	2–4 3/4	1/4	11 3/8	1/4	15/32	•
APS366B	4 1/2–6 1/4	1/4	12 1/8	3/8	15/32	•

Set shown includes kit bag

304AHSK



Adjustable Hook Spanners

- Services collars, rings and bearings
- Single jaw and roll pin construction with industrial finish
- Make sure jaw hook is properly positioned when in use

Stock No.	A	B	C	D	Set Contains: 304AHSK
AHS300B	3/4–2	1/8	6 3/8	11/32	•
AHS301B	1 1/4–3	5/32	8 1/8	13/32	•
AHS304B	2–4 3/4	3/16	11 3/8	15/32	•
AHS307B	4 1/2–6 1/2	1/4	12 1/8	15/32	•

Set shown includes kit bag

AFS482B



Adjustable Face Pin Spanners

For servicing seal and packing nuts on hydraulic cylinders.

Stock No.	A	B	C	D
AFS482B	6 3/8	2	3/16	5/32
AFS483B	8 1/4	3	1/4	3/16
AFS484B	10 3/8	4	5/16	1/4

SPECIAL APPLICATION Blue-Point®



Chain Wrenches

Stock No.	A	B	C	Replacement Chain
CW12A	16	4	12	CW12A-1
CW15A	19	5	15	CW15A-1
CW24A	23	6	24	CW24A-1

VGP18110 Locking Chain Wrench

- Wraps around and holds irregular shaped objects like oil filters and mufflers
- Chain capacity: up to 6 9/32" (160 mm)
- Handle length: 9 27/32" (250 mm)

VGP181101 Replacement Chain

- Replacement chain for VGP18110

BLPSTWRKT

Strap Wrenches

BLPSTWR4 Strap Wrench

- Adjusts to fit any circumference or irregular shape
- Will not scratch or damage surfaces
- Cushioned grip for maximum comfort
- Heavy duty construction for longer life
- 4" max diameter

BLPSTWR6 Strap Wrench

- Same as BLPSTWR4 except features a 6" max diameter

BLPSTWRKT Strap Wrench Set

- BLPSTWR4 and BLPSTWR6 (2pc)

A NEW SPIN ON TORQUE.

Torque is critical. And with vehicle manufacturers investing heavily to reduce weight and improve fuel mileage – by using a wide array of materials, like high-strength alloys, aluminum, and engineered composites – torque is more important than ever. Improved capabilities and technology mean manufacturers can maintain exceptional tolerances on components: contingent on accurate, consistent torque and angle application. That's where Snap-on excels.

TechAngle® Electronic Torque Wrenches — Get the confidence you deserve, and the advanced technology and intuitive design you need, with our new ATECH Series torque wrenches. With a wealth of innovative features – like progressive LEDs, large backlit LCD panels, six different measurement modes, four different alert modes, multiple presets, "Torque-Then-Angle" sequencing, and more – this wrench will handle whatever comes its way.

Mechanical Torque Wrenches — If your needs call for something simpler, Snap-on has a wide selection of mechanical torque wrenches that offer excellent performance. Need a highly accurate – yet compact – profile for tight jobs? Choose a QD Series micrometer-style torque wrench. With a smooth, easy-to-use adjustment, non-slip knurled handle and Snap-on® high-strength sealed ratchet head, this wrench offers a great blend of performance and reliability. Additionally, it comes in a wide range of drive sizes, lengths, ratchet head articulation and measurement scales that are sure to meet your needs.

TQ Series Torque Wrenches — Want something with a comfortable composite handle, durable internal components, and fast, easy-to-set torque adjustment? Then opt for a TQ Series split-beam torque wrench. With a strong steel-beam mechanism that has fewer parts to wear out, this wrench offers a durable, long-lasting torque solution for the toughest environments. Simply set the torque and you are ready to go – without the need to wind it down before being stored.

TECHANGLE® TORQUE WRENCHES

ATECH1FR240B

ATECH2FR100B

ATECH3FR250B

ATECH4R600

ATECH2FS100

TechAngle Models/2% Accuracy

- Dual progressive LEDs allow user to see active torque at various work positions; enables user to anticipate torque and slow down as they get closer to desired torque level
- Large LCD screen with back light – numbers become larger and bolder during active torque making it easier to read during use
- Four alert modes (LCD, Dual LED, Audible, Vibratory)
- Six measurement modes – ft-lb, in-lb, N•m, dN•m, kg-cm and angle at the touch of a button
- "Motorcycle-style" handle with seamless textured grip offers a comfortable, nonslip surface
- Flared end prevents your hand from slipping off during high-leverage applications
- Protected end cap design with solid brass contacts prevents accidental loosening and ensures continuity
- Torque then angle allows the user to torque fasteners and then switch to angle without removing the torque wrench from the fastener
- Highly configurable – ten presets with the ability to customize numerous functions (sleep mode, LCD display, calibration, cycle counter, etc.) and store up to 50 records
- "Exclusive Battery Carriage Slide" minimizes battery movement if tool is dropped or impacted for reliability
- Low-profile buttons protect against accidental activation
- Uses (three) AA alkaline batteries (included)
- Angle accuracy ±1% of reading ±1° at angular velocity >10°/sec
- Two-year warranty
- Ratchet mechanism features Snap-on® Dual 80® design – only 4.5° of ratchet arc
- Up to 90% Non-condensing
- Includes storage case

ATECH Steel Models only:

- Multiple language translation built into wrench (English, French, German, Spanish)
- Compact, all-metal body
- For more information visit www.snapon.com/doitjustright

Applications:
Head bolts on large and small trucks, passenger vehicles, motorcycles, snowmobiles, ATVs, automobile suspensions and brakes

Specifications	ATECH1FR240B**	ATECH2FR100B**	ATECH3FR250B**	ATECH4R600* **	ATECH2FS100**	ATECH3FS250**
Square Drive, inches	1/4	3/8	1/2	3/4	3/8	1/2
Head Type	Sealed Flex Head	Sealed Flex Head	Sealed Flex Head	Sealed Fixed Head	Sealed Flex Head	Sealed Flex Head
Gear Teeth	72	80	80	32	80	80
Gear Action	5°	4.5°	4.5°	11°	4.5°	4.5°
Range, in-lb	12–240	60–1,200	150–3,000	720–7,200	60–1,200	150–3,000
Range, ft-lb	1–20	5–100	12.5–250	60–600	5–100	12.5–250
Range, N•m	1.36–27.12	6.8–135.0	16.9–339	81–813	6.8–135.0	16.9–339
Angle Range	0°–360°	0°–360°	0°–360°	5°–360°	0°–360°	0°–360°
Head Depth, inches	7/16	9/16	3/4	1 1/4	9/16	3/4
Head Width, inches	7/8	1 1/4	1 5/8	2 1/2	1 1/4	1 5/8
Operating Temperature	0–130 °F (0–54 °C)	0–130 °F (-17–54 °C)	0–130 °F (-17–54 °C)	40-110 °F (5-42 °C)	0–130 °F (-17–54 °C)	0–130 °F (-17–54 °C)
Storage Temperature	0–130 °F (0–54 °C)	0–130 °F (-17–54 °C)	0–130 °F (-17–54 °C)	0–122 °F (-20–50 °C)	0–130 °F (-17–54 °C)	0–130 °F (-17–54 °C)
Housing Color	Black	Black	Black	Black	Chrome	Chrome
Length, inches	16.4	17.9	26.6	49.0	15.4	26.7
Ratchet Service Kit	RKRT72A	RKRF80	RKRS80A	RKRQC4	RKRF80	RKRS80A
Storage Case	PBATECH100B	PBATECH100B	PBATECH250B	PBATECH4	PBATECH100B	PBATECH250B

*Includes protective boot.
** CE

All *Snap-on* torque wrenches, drivers and testers are provided with a Certificate of Calibration (unless otherwise indicated). All wrenches and drivers are calibrated per ASME® and ISO® standards for accuracy, from 20–100% of full scale, using NIST® traceable equipment.

CTECH3FR250

CTECH4R600

CTECH2Y100

CTAL1240

CTAL1R240

CTAL1J240

ControlTech Industrial Torque Wrench

In addition to features found in the standard CTECH series wrenches, the CTAL series of wrenches also feature:
- Manufactured from rugged black anodized 6061-T6 aerospace aluminum for durability and reduced weight
- Multiple language translation built into wrench (English, French, German, Spanish)

CTECH/CTAL Features

- Torque and Angle combo modes provide the most accurate and fastest way to achieve torque plus angle in a single motion (patent pending)
- Built-in calibration factor for different head lengths (patent pending)
- Dual side LED indicator lights with configurable settings including customizable passwords
- Large LCD screen with backlight
- Four indicator modes: LCD, LED, audible, vibratory
- Rugged, all-metal body for strength
- 50 presets with lockout ability
- Sequence programming and job mode
- USB downloadable data
- Two-year warranty
- Includes storage case

CTECH/CTAL Specifications

- Torque Accuracy: +/- 2%CW, +/-3%CCW
- Angle Accuracy: +/-1% of Reading, +/- 1° @ Angular Velocity › 10°/Sec ‹ 180°/Sec
- Angle Range: 0–360°
- Storage Capacity: 1,500 Readings
- Number of Presets: 50
- Operating Temperature: 0–130 °F (-18–54 °C)
- Storage Temperature: 0–130 °F (-18–54 °C)
- Humidity: Up to 90% Non-condensing

Stock No.	Head Type	Square Drive, inches	Gear Teeth	Gear Action	Range, in-lb	Range, ft-lb	Range, N•m	Shank Diameter, inches	Weight, lb (kg)	Length, inches (mm)
CTECH1FR240*	Sealed Flex Head	1/4	72	5°	12–240	1.0–20.0	1.4–27.2	—	2.0 (.9)	14.1 (358)
CTECH1R240*	Sealed Fixed Head	1/4	72	5°	12–240	1.0–20.0	1.4–27.2	—	2.0(.9)	14.1 (358)
CTECH2FR100**	Sealed Flex Head	3/8	80	4.5°	60–1,200	5–100	6.8–135.6	—	2.7 (1.2)	17.2 (437)
CTECH3FR250***	Sealed Flex Head	1/2	80	4.5°	150–3,000	12.5–250	16.9–339	—	4.5 (2.0)	26.7 (678)
CTECH4R600†	Sealed Fixed Head	3/4	32	11°	360–7,200	30–600	40.7–813.5	—	10.5 (4.8)	48.6 (1,234)
CTECH1J240	Interchangeable	—	—	—	12–240	1.0-20.0	1.4-27.2	J (0.425")	1.8 (0.8)	12.5 (318)
CTECH2Y100	Interchangeable	—	—	—	60–1,200	5–100	6.8–135.6	Y (0.560")	2.7 (1.2)	17.2 (436.9)
CTECH3X250	Interchangeable	—	—	—	150–3,000	12.5–250	16.9–339	X (0.735")	3.6 (1.6)	24.1 (612)
CTECH4Z600	Interchangeable	—	—	—	360–7,200	30–600	40.7–813.5	Z (0.990")	7.6 (3.5)	44.8 (1,138)
CTAL1J240	Interchangeable	—	—	—	12-240	1.0-20.0	1.4-27.2	J (0.425")	1.0 (0.45)	12.5 (316)
CTAL1R240	Sealed Fixed Head	1/4	72	5°	12–240	1.0–20.0	1.4–27.2	—	1.2 (0.54)	14.1 (358)
CTAL1240	Fixed Head	1/4	—	—	12–240	1.0–20.0	1.4–27.2	—	1.1 (0.49)	12.4 (315)

*Uses Ratchet Service Kit RKRT72A Includes three AAA Lithium batteries.
**Uses Ratchet Service Kit RKRF80. Includes three AA Lithium batteries.
***Uses Ratchet Service Kit RKRS80A. Includes three AA Lithium batteries.
†Uses Ratchet Service Kit RKRQC4. Includes three AA Lithium batteries.
CTAL Torque Wrenches include three AAA Lithium batteries.

⚠WARNING

- Do not exceed rated torque
- Do not use to break fasteners loose
- Periodic recalibration is necessary to maintain accuracy
- Read safety precautions on pages W1 to W4

TECHWRENCH® TORQUE WRENCHES

TECH2R100

TECH4R600

Techwrench (all models)

- Manual preset and automatic track and peak hold modes
- Torque units conversion, N•m, ft-lb, in-lb
- Audible (tone) and tactile (vibrating handle) preset alerts
- Display resolution 0.1 ft-lb, 0.1 N•m, 1 in-lb
- Each button has only one function (power on, preset increase, preset decrease, unit of measure select)
- Comfortable, nonslip grip
- Sealed flex head ratchets move ±15°
- Three AA alkaline cells included
- Low battery indicator and auto shutoff after two minutes idle
- Operating temperature 40–110 °F (5–42 °C)
- Storage temperature 0–122 °F (-20–50 °C)
- Humidity up to 90% non-condensing
- Splash proof, protects against water and most automotive shop fluid
- ISO-6789-2003 and ASME® B107.300-2010 (B107.28) standard compliant
- Certificate of NIST® traceability for 20%–100% of full scale
- Dual 80® technology on all 72- and 80- tooth models
- Includes storage case

Standard Models - 2% Accuracy/Fixed Head

	TECH1R240*	TECH2R100*	TECH3R250*	TECH4R600*
Square Drive, inches	1/4	3/8	1/2	3/4
Head Type	Sealed Fixed Ratchet	Sealed Fixed Ratchet	Sealed Fixed Ratchet	Sealed Fixed Ratchet
Gear Teeth	72	80	80	32
Gear Action	5°	4.5°	4.5°	11°
Range, in-lb	24–240	60–1,200	300–3,000	720–7,200
Range, ft-lb	2–20	5–100	25–250	60–600
Range, N•m	27.1–27.12	6.7–135	34–339	81–813
Head Depth, inches	7/16	5/8	3/4	1 1/4
Head Width, inches	7/8	1 5/32	1 5/8	2 1/2
Housing Color	Red	Red	Red	Red
Length, inches	15 1/4	17 1/4	26 1/4	48
Ratchet Service Kit	**RKRT72A**	**RKRTF80**	**RKRS80A**	**RKRQC4**

* CE

TECH3FR250

Techwrench (standard models)

- Torque accuracy ratchet head models: 2% CW, 3% CCW from 20%–100% F.S. 4% CW, 6% CCW from 10%–19% F.S. 8% CW, 10% CCW from 5%–9% F.S. (TECH2 only)
- Torque accuracy interchangeable head models: 4% CW, 6% CCW from 20%–100% F.S. 8% CW, 12% CCW from 10%–19% F.S. 16% CW, 20% CCW from 5%–9% F.S. (TECH Y only)

Standard Models - 2% Accuracy

	TECH1FR240*	TECH2FR100*	TECH3FR250*
Square Drive, inches	1/4	3/8	1/2
Head Type	Sealed Flex Head	Sealed Flex Head	Sealed Flex Head
Gear Teeth	72	80	80
Gear Action	5°	4.5°	4.5°
Range, in-lb	24–240	60–1,200	300–3,000
Range, ft-lb	2–20	5–100	25–250
Range, N•m	27.1–27.12	6.7–135	34–339
Head Depth, inches	7/16	5/8	3/4
Head Width, inches	7/8	1 5/32	1 5/8
Housing Color	Red	Red	Red
Length, inches	15 1/4	17 1/4	26 1/4
Ratchet Service Kit	**RKRT72A**	**RKRF80**	**RKRS80A**

* CE

TECH2Y100

TECH4Z600

Standard Models - 4% Accuracy/ Interchangeable Head

	TECH1J240*	TECH2Y100*	TECH3X250*	TECH4Z600*
Range, in-lb	24–240	60–1,200	300–3,000	720–7,200
Range, ft-lb	2–20	5–100	25–250	60–600
Range, N•m	27.1–27.12	6.7–135	34–339	81–813
Shank Diameter	J (0.425")	Y (0.560")	X (0.735")	Z (0.990")
Housing Color	Red	Red	Red	Red
Length, inches	13 3/4	15 1/2	23 3/4	42

Wrench length specification does not include the length of interchangeable heads. The certification of accuracy provided per *ASME* and ISO® standards is 20% to 100% of full scale.

* CE

The QD Series of click-type Torque Instruments features an innovative design that provides consistently accurate readings and rugged, trouble-free performance.

GQT1F200NP

QD2R100

QD3150

Features:

- **Certificate of Calibration.** A Certificate of Calibration is packed with every QD series torque instrument. Actual certification readings and individual instrument serial number are included. Each torque instrument, as calibrated at the factory, is certified to meet the accuracy specified in ASME® and was calibrated on a torque standard traceable to the National Institute of Standards Technology (NIST®)
- **Accuracy.** All QD series torque instruments are accurate to ±4% clockwise and ±6% counterclockwise from 20% to 100% of full scale
- **Long Life Ratchet Head.** QD series torque instruments feature the Snap-on® high strength sealed ratchet head. Sealed ratchet heads keep out dirt and moisture while being virtually maintenance-free. Applies to all QD series ratchet head models. (US Patent #6,125,722) applies to 1/4", 3/8" and 1/2" drive ratchet head models only
- **Minimal Friction "Hour Glass" Cam.** Unique cam design minimizes friction due to reduced contact area between the cam and internal tube wall. Cam retains and releases lubricant where needed. Reduced friction results in more accurate and repeatable torque values
- **Laser Etched Scale.** Easier to read under most light conditions
- **Positive Stop.** Instrument cannot be accidentally disassembled if wound down past scale
- **Long-Term Protection.** Each instrument includes a storage case

US Torque Instruments (in-lb) - ±4% Accuracy

Square Drive, inches	Stock No.	Head Style	Gear Teeth	Swing Arc	Range, min	Range, max	Increments	Length, inches	Head Width, inches	Head Depth, inches	Storage Case	Ratchet Service Kit
1/4	QD150	Fixed	—	—	10 in-lb	50 in-lb	.5 in-lb	9 3/4	5/8	13/16	PBQD1	–
1/4	QD1R50	Fixed Ratchet	36	10°	10 in-lb	50 in-lb	.5 in-lb	9 7/8	7/8	7/16	PBQD1	RKRT936
1/4	QD1200	Fixed	—	—	40 in-lb	200 in-lb	1 in-lb	10 15/16	5/8	13/16	PBQD1	–
1/4	QD1R200	Fixed Ratchet	36	10°	40 in-lb	200 in-lb	1 in-lb	11 1/16	7/8	7/16	PBQD1	RKRT936
1/4	GQT1F200NP	Plain	32	12°	40 in-lb	200 in-lb	1 in-lb	8.97	.61	.69	WPB7	–
1/4	GQT1R200NP	Fixed Ratchet	32	12°	40 in-lb	200 in-lb	1 in-lb	8.97	.88	.76	WPB7	R11AR-RK
3/8	QD2R200	Compact Ratchet	36	10°	40 in-lb	200 in-lb	1 in-lb	11 1/16	7/8	7/16	PBQD1	RKRFC936
3/8	GQT2R200NP	Fixed Ratchet	32	12°	40 in-lb	200 in-lb	1 in-lb	8.97	.88	.88	WPB7	R21AR-RK
3/8	QD21000	Fixed	—	—	200 in-lb	1,000 in-lb	5 in-lb	14 9/16	1	1 3/16	PBQD2	–
3/8	QD2R1000	Fixed Ratchet	36	10°	200 in-lb	1,000 in-lb	5 in-lb	15 9/16	1 5/32	9/16	PBQD2	RKRF936
3/8	GQT2F1000NP	Plain	32	12°	200 in-lb	1,000 in-lb	5 in-lb	14	.80	1.03	WPB7	R11AR-RK
3/8	GQT2R1000NP	Fixed Ratchet	32	12°	200 in-lb	1,000 in-lb	5 in-lb	14	1.26	1.07	WPB50A	R22AR-RK
1/2	QD3R1600	Fixed Ratchet	36	10°	320 in-lb	1,600 in-lb	10 in-lb	19	1 5/8	3/4	PBQD3	RKRS936
1/2	QD32500	Fixed	—	—	500 in-lb	2,500 in-lb	10 in-lb	18 1/8	1	1 1/4	PBQD3	–
1/2	QD3R2500	Fixed Ratchet	36	10°	500 in-lb	2500 in-lb	10 in-lb	19 1/8	1 5/8	3/4	PBQD3	RKRS936

US Torque Instruments (ft-lb) - ±4% Accuracy

Square Drive, inches	Stock No.	Head Style	Gear Teeth	Swing Arc	Range, min	Range, max	Increments	Length, inches	Head Width, inches	Head Depth, inches	Storage Case	Ratchet Service Kit
3/8	QD275	Fixed	—	—	15 ft-lb	75 ft-lb	.5 ft-lb	14 9/16	1	1 3/16	PBQD2	–
3/8	QD2FR75	Flex Ratchet	36	10°	5 ft-lb	75 ft-lb	.5 ft-lb	15 3/4	1 5/32	9/16	PBQD2	RKRF936
3/8	QD2100	Fixed	—	—	20 ft-lb	100 ft-lb	.5 ft-lb	14 9/16	1	1 3/16	PBQD2	–
3/8	QD2R100A	Fixed Ratchet	80	4.5°	20 ft-lb	100 ft-lb	.5 ft-lb	15 9/16	1 7/32	9/16	PBQD2	RKRF936
1/2	QD3150	Fixed	—	—	30 ft-lb	150 ft-lb	1 ft-lb	18	1	1 1/4	PBQD3	–
1/2	QD3R150	Fixed Ratchet	36	10°	30 ft-lb	150 ft-lb	1 ft-lb	19	1 5/8	3/4	PBQD3	RKRS936
1/2	QD3250	Fixed	—	—	50 ft-lb	250 ft-lb	1 ft-lb	23 3/16	1	1 1/4	PBQD3	–
1/2	QD3R250	Fixed Ratchet	36	10°	50 ft-lb	250 ft-lb	1 ft-lb	24 3/16	1 5/8	3/4	PBQD3	RKRS936
1/2	BRUTUS3R250D	Fixed Ratchet	36	10°	50 ft-lb	250 ft-lb	1 ft-lb	28	1 3/8	3/4	PBTQ4	RKRS936
1/2	GQT3R250NP	Fixed Ratchet	32	12°	50 ft-lb	250 ft-lb	1 ft-lb	23.75	1.74	1.42	WPB5	R33AR-RK
3/4	QD4400	Fixed	—	—	80 ft-lb	400 ft-lb	2.5 ft-lb	33 3/4	1 1/2	1 1/2	PBQC4	–
3/4	QD4R400	Fixed Ratchet	32	11°	80 ft-lb	400 ft-lb	2.5 ft-lb	35 3/4	2 1/2	1 1/4	PBQC4	RKRQC4
3/4	QD4600	Fixed	—	—	120 ft-lb	600 ft-lb	5 ft-lb	40 3/4	1 1/2	1 1/2	PBQC4	–
3/4	QD4R600	Fixed Ratchet	32	11°	120 ft-lb	600 ft-lb	5 ft-lb	42 3/4	2 1/2	1 1/4	PBQC4	RKRQC4
1	QD5R1000	Fixed Ratchet	30	12°	200 ft-lb	1,000 ft-lb	5 ft-lb	71	3 1/8	1 1/2	PBQC5	RKRQC5

⚠WARNING

- Do not exceed rated torque
- Do not use to break fasteners loose
- Periodic recalibration is necessary to maintain accuracy
- Read safety precautions on pages W1 to W4

ADJUSTABLE CLICK-TYPE

Metric Torque Wrenches (kg-m, kg-cm) - ±4% Accuracy

QD2RM1000

Square Drive, inches	Stock No.	Head Style	Gear Teeth	Swing Arc	Range, min	Range, max	Increments	Length, inches	Head Width, inches	Head Depth, inches	Storage Case	Ratchet Service Kit
3/8	QD2RM1000	Flex Head	36	10°	200 kg-cm	1,000 kg-cm	5 kg-cm	15 9/16	1 5/32	9/16	PBQD2	RKRF936
1/2	QD3RM30	Fixed Ratchet	36	10°	6 kg-m	30 kg-m	.2 kg-m	19	1 5/8	3/4	PBQD3	RKRS936

Newton Meter Torque Wrenches - ±4% Accuracy

QD2RN50

Square Drive, inches	Stock No.	Head Style	Gear Teeth	Swing Arc	Range, min	Range, max	Increments	Length, inches	Head Width, inches	Head Depth, inches	Storage Case	Ratchet Service Kit
1/4	QD1RN6A	Fixed Ratchet	36	10°	1 N•m	6 N•m	.05 N•m	9 7/8	7/8	7/16	PBQD1	RKRT936
1/4	QD1RN25A	Fixed Ratchet	36	10°	5 N•m	25 N•m	.1 N•m	11 3/4	7/8	7/16	PBQD1	RKRT936
3/8	QD2RN25A	Compact Ratchet	36	10°	5 N•m	25 N•m	.1 N•m	11 3/4	7/8	7/16	PBQD2	RKRFC936
3/8	QD2RN50	Fixed Ratchet	36	10°	10 N•m	50 N•m	.5 N•m	15 9/16	1 5/32	9/16	PBQD2	RKRF936
3/8	QD2RN100	Fixed Ratchet	36	10°	20 N•m	100 N•m	.5 N•m	15 9/16	1 5/32	9/16	PBQD2	RKRF936
1/2	QD3RN200	Fixed Ratchet	36	10°	40 N•m	200 N•m	2 N•m	19	1 5/8	3/4	PBQD3	RKRS936
1/2	QD3RN350	Fixed Ratchet	36	10°	70 N•m	350 N•m	2 N•m	24 3/16	1 5/8	3/4	PBQD3	RKRS936
3/4	QD4RN800	Fixed Ratchet	32	11°	150 N•m	800 N•m	5 N•m	42 3/4	2 1/2	1 1/4	PBQC4	RKRQC4

ADJUSTABLE CLICK-TYPE, TQ SERIES

TQ Thumb Wheel Series:

- Flex Head Models offer sealed Snap-on® ratchets, which flex up to 15° to provide knuckle and obstruction clearance
- Fixed Ratchet Models offer a sealed *Snap-on* ratchet that is rigidly fixed in line with the torque body
- *Snap-on* Sealed Ratchet Head is virtually maintenance-free; more time working with the tool, less time on tool maintenance
- Thumb Screw Type Adjustment is faster than cycling through a micrometer style torque wrench. Guard prevents setting from being changed accidentally. Setting is displayed in window. Conversion table to N•m displayed on handle
- Sealed Neck keeps dust and grit away from the torque mechanism for longer tool life
- "Split Beam" Measuring Element provides accurate, reliable readings and eliminates the heavy coil spring used in conventional click-type wrenches. This yields fewer moving parts, reducing friction and wear
- Cushion Grip Handle provides comfort plus control and resists most automotive fluids
- Designed for measuring torque in a clockwise direction only. Wrench is not reversible
- CE EU — GB, FR, ES, DE

TQFR100C

TQFR250E

TQR600E

Guaranteed Accuracy:

TQ Series – Accurate within ±4% of any clockwise setting from 20% of full scale to full scale.

TQR400E/TQR600E only:

- ±4% of setting when used in the following orientations:
- Main body vertical orientation
- Torque wrench square drive axis with vertical orientation
- In all other positions, guaranteed accuracy is ±5% Accuracy is guaranteed in the clockwise direction from 20%-100% full scale.

US Reading Torque Wrenches with Conversion Scale - ±4% Accuracy

Square Drive, inches	Stock No.	Head Style	Gear Teeth	Swing Arc	Range, min	Range, max	Increments	Length, inches	Head Width, inches	Head Depth*, inches	Ratchet Service Kit	Storage Case
3/8	TQFR50C	Flex	36	10°	120 in-lb	600 in-lb	10 in-lb	18 5/8	1 5/8	9/16	RKRF936	PB50B
3/8	TQFR100C	Flex	36	10°	20 ft-lb	100 ft-lb	2 ft-lb	18 5/8	1 5/8	9/16	RKRF936	PB50B
1/2	TQFR250E	Flex Head	36	10°	40 ft-lb	250 ft-lb	5 ft-lb	22 3/8	1 5/8	3/4	RKRS936	PBTQ3
1/2	TQR250E	Fixed Ratchet	36	10°	40 ft-lb	250 ft-lb	5 ft-lb	22 3/8	1 5/8	3/4	RKRS936	PBTQ3
3/4	TQR400E**	Detach Ratchet	32	11°	80 ft-lb	400 ft-lb	10 ft-lb	38 1/8	2 1/2	1 1/4	RKRTQ4	PBTQ4
3/4	TQR600E**	Detach Ratchet	32	11°	200 ft-lb	600 ft-lb	10 ft-lb	48 5/8	2 1/2	1 1/4	RKRTQ4	PBTQ4

All wrenches are non-reversible
*Does not include square drive dimension
**Three-piece construction disassembles for storage/transport.

All *Snap-on* torque wrenches, drivers and testers are provided with a Certificate of Calibration (unless otherwise indicated).
All wrenches and drivers are calibrated per ASME® and ISO® standards for accuracy, from 20 to 100% of full scale, using NIST® traceable equipment.

TQFRN350E

Newton Meter Torque Wrenches with Conversion Scale - ±4% Accuracy

Square Drive, inches	Stock No.	Head Style	Gear Teeth	Swing Arc	Range, min	Range, max	Increments	Length, inches	Head Depth*, inches	Ratchet Service Kit
3/8	**TQFRN130B**	Flex Head	30	12°	25 N•m	130 N•m	5 N•m	17 5/8	9/16	**RKQJA2D**
3/8	**TQFRN68B**	Flex Head	30	12°	14 N•m	68 N•m	2 N•m	17 5/8	9/16	**RKQJA2D**
1/2	**TQFRN350E**	Flex Head	32	11°	70 N•m	350 N•m	5 N•m	22 1/8	3/4	**RKTQ3**

All wrenches are non-reversible. 3/8" drive models in this table are metal handle.
*Does not include square drive dimension.

TQFRM34D

Metric Torque Wrenches with Conversion Scale - ±4% Accuracy

Square Drive, inches	Stock No.	Head Style	Gear Teeth	Swing Arc	Range, min	Range, max	Increments	Length, inches	Head Width, inches	Head Depth*, inches	Ratchet Service Kit
1/2	**TQFRM34D**	Flex Head	32	11°	5.0 kg-m	34 kg-m	1.0 kg-m	22 1/8	1 5/8	3/4	**RKTQ3**
3/4	**TQRM80C**	Detach Ratchet	32	11°	26.0 kg-m	80 kg-m	2.0 kg-m	48	2 3/8	1 1/4	**RKRQC4**

All wrenches are non-reversible.
*Does not include squre drive dimension.

TORQOMETER® TORQUE WRENCHES

US Reading/Standard - ±2% Accuracy

Square Drive, inches	Basic Models Stock No.	Follow up Models Stock No.	Signal Models Stock No.	Range	Increments	Length, inches	Width, inches	Head Depth*, inches	Storage Case
1/4	**TE1A**	**TE1FUA**	–	15 in-lb	1/4 in-lb	9 29/32	2 11/16	1 1/4	**PB9**
1/4	**TE3A**	**TE3FUA**	–	30 in-lb	1/2 in-lb	9 29/32	2 11/16	1 1/4	**PB9**
1/4	**TE6A**	**TE6FUA**	–	75 in-lb	1 in-lb	9 29/32	2 11/16	1 1/4	**PB9**
1/4	**GTE6A**	–	–	75 in-lb	1 in-lb	9 29/32	2 11/16	1 1/4	**PB9**
3/8	**TE12A**	**TE12FUA**	**TE12LA**	150 in-lb	2 1/2 in-lb	9 29/32	2 11/16	1 1/4	**PB9**
3/8	**TE25A**	**TE25FUA**	**TE25LA**	300 in-lb	5 in-lb	9 29/32	2 11/16	1 1/4	**PB9**
3/8	**TE50A**	**TE50FUA**	**TE50LA**	600 in-lb	10 in-lb	12 1/2	2 11/16	1 1/4	**PB9**
3/8	**TE12FA**	**TE12FFUA**	**TE12FLA**	12 ft-lb	1/2 ft-lb	9 29/32	2 11/16	1 1/4	**PB9**
3/8	**TE25FA**	**TE25FFUA**	**TE25FLA**	25 ft-lb	1/2 ft-lb	9 29/32	2 11/16	1 1/4	**PB9**
3/8	**TE50FA**	**TE50FFUA**	**TE50FLA**	50 ft-lb	1 ft-lb	12 1/2	2 11/16	1 1/4	**PB9**
1/2	**TE51**	**TE51FU**	**TE51L**	600 in-lb	10 in-lb	15	2 11/16	1 5/16	–
1/2	**TE51F**	**TE51FFU**	**TE51FL**	50 ft-lb	1 ft-lb	15	2 11/16	1 5/16	–
1/2	**TE100**	**TE100FU**	**TE100L**	100 ft-lb	1 ft-lb	16	2 3/4	1 3/8	**PBR5**
1/2	**GTE100**	–	–	100 ft-lb	1 ft-lb	16	2 3/4	1 3/8	**PBR5**
1/2	**TE175**	**TE175FU**	**TE175L**	175 ft-lb	2 1/2 ft-lb	18 3/4	2 3/4	1 3/8	**PBR5**
1/2	**GTE175**	–	–	175 ft-lb	2 1/2 ft-lb	18 3/4	2 3/4	1 3/8	**PBR5**
1/2	**TE250**	**TE250FU**	**TE250L**	250 ft-lb	5 ft-lb	23 3/4	2 3/4	1 3/8	**PB8A**
3/4	**TE352A**	**TE352FUA**	**TE352LA**	350 ft-lb	5 ft-lb	29 7/8	3 1/4	1 25/32	–
3/4	**TE602A**	**TE602FUA**	**TE602LA**	600 ft-lb	10 ft-lb	40 7/8	3 1/4	1 25/32	**PB39**
1	**TE803****	**TE803FU****	**TE803L****	800 ft-lb	10 ft-lb	66 13/16	3 9/16	2 1/32	–
1	**TE1003****	**TE1003FU****	**TE1003L****	1,000 ft-lb	10 ft-lb	66 13/16	3 9/16	2 1/32	–
1	**TE1503†**	**TE1503FU†**	**TE1503L†**	1,500 ft-lb	25 ft-lb	80	4 13/32	2 1/8	–
1	**TE2003†**	**TE2003FU†**	**TE2003L†**	2,000 ft-lb	25 ft-lb	80	4 13/32	2 1/8	–
1 1/2	**TE2005†**	**TE2005FU†**	**TE2005L†**	2,000 ft-lb	25 ft-lb	80	3 9/16	2 3/8	–
1 1/2	**TE3005†**	**TE3005FU**	**TE3005L**	3,000 ft-lb	50 ft-lb	140	5 1/2	2 13/16	–

GTE6A

TE50FUA

TE175L

Wrenches in chart do not include certificate of calibration. Wrenches with a certificate of calibration are available by adding "C" to the end of the stock number
*Does not include square drive dimension.
**Includes separately packed 92TQPA 4' tubular extension handle.
†Includes separeately packed 93TQPA 5' tubular extension handle.
Basic model = 1 needle
Follow-up = 2 needles
Signal = signal light
GTE models feature a black oxide finish

⚠WARNING

- Do not exceed rated torque
- Do not use to break fasteners loose
- Periodic recalibration is necessary to maintain accuracy
- Read safety precautions on pages W1 to W4

TORQOMETER® TORQUE WRENCHES

TESI75

TESI75L

Newton Meter Reading/Standard - 2% Accuracy

Square Drive, inches	Basic Models Stock No.	Follow up Models Stock No.	Signal Models Stock No.	Range, N•m	Increments, N•m	Length, inches	Width, inches	Head Depth*, inches	Storage Case
1/4	TESI5	–	TESI5L	5	.2	9 29/32	2 11/16	1 1/4	PB9
1/4	TESI10	TESI10FU	TESI10L	10	.5	9 29/32	2 11/16	1 1/4	PB9
3/8	TESI20	TESI20FU	TESI20L	20	.5	9 29/32	2 11/16	1 1/4	PB9
3/8	TESI30	TESI30FU	TESI30L	30	1.0	9 29/32	2 11/16	1 1/4	PB9
3/8	TESI60	TESI60FU	TESI60L	60	2.0	12 1/2	2 11/16	1 1/4	PB9
3/8	TESI70	TESI70FU	TESI70L	70	2.0	12 1/2	2 11/16	1 1/4	PB9
3/8	TESI75	TESI75FU	TESI75L	75	1.0	12 1/2	2 11/16	1 1/4	PB9
1/2	TESI125	TESI125FU	TESI125L	125	5.0	16	2 11/16	1 3/8	PBR5
1/2	TESI200	TESI200FU	TESI200L	200	5.0	18 3/4	2 3/4	1 3/8	PBR5
1/2	TESI250	TESI250FU	TESI250L	250	5.0	18 3/4	2 3/4	1 3/8	PBR5
3/4	TESI500A	TESI500FUA	TESI500LA	500	10.0	29 7/8	3 1/4	1 25/32	PB39
3/4	TESI800A	TESI800FUA	TESI800LA	800	20.0	40 7/8	3 1/4	1 25/32	PB39
1	TESI1360**	TESI1360FU**	TESI1360L**	1,360	20.0	66 13/16	3 9/16	2 1/32	–
1	TESI2803***	TESI2803FU***	TESI2803L***	2,800	50.0	80	4 13/32	2 1/8	–
1 1/2	TESI2805***	TESI2805FU***	TESI2805L***	2,800	50.0	80	4 25/32	2 3/8	–
1 1/2	–	TESI4000FU	TESI4000L	4,000	100.0	140	5 1/2	2 13/16	–

Wrenches in chart do not include certificate of calibration. Wrenches with a certificate of calibration are available by adding "C" to the end of the stock number.
*Does not include square drive dimension.
**Includes separately packed 92TQPA 4' tubular extension handle.
†Includes separately packed 93TQPA 5' tubular extension handle.
Basic model= 1 needle
Follow-up = 2 needles
Signal = signal light

TER175

TER175L

Combination US/Newton Meter Reading – Precise 1% Accuracy

Square Drive, inches	Basic Models Stock No.	Follow up Models Stock No.	Signal Models Stock No.	Range, N•m	Increments, N•m	US Range	US Increments	Length, inches	Width, inches	Head Depth*, inches	Storage Case
1/4	TER1A	TER1FUA	–	1.7 N•m	.05 N•m	15 in-lb	.5 in-lb	9 29/32	2 11/16	1 1/4	PB9
1/4	TER3A	TER3FUA	–	3.5 N•m	0.1 N•m	30 in-lb	1 in-lb	9 29/32	2 11/16	1 1/4	PB9
1/4	TER6A	TER6FUA	–	8.4 N•m	0.2 N•m	75 in-lb	1 in-lb	9 29/32	2 11/16	1 1/4	PB9
3/8	TER12A	TER12FUA	TER12LA	17 N•m	.5 N•m	150 in-lb	5 in-lb	9 29/32	2 11/16	1 1/4	PB9
3/8	TER25A	TER25FUA	TER25LA	3200 N•cm	50 N•cm	300 in-lb	5 in-lb	9 29/32	2 11/16	1 1/4	PB9
3/8	TER50A	TER50FUA	TER50LA	60 N•m	1 N•m	600 in-lb	20 in-lb	12 1/2	2 11/16	1 1/4	PB9
1/2	TER51	TER51FU	TER51L	60 N•m	1 N•m	600 in-lb	20 in-lb	15	2 11/16	1 5/16	–
1/2	TER100	TER100FU	TER100L	140 N•m	5 N•m	100 ft-lb	2 ft-lb	16	2 3/4	1 3/8	PBR5
1/2	TER175	TER175FU	TER175L	230 N•m	10 N•m	175 ft-lb	5 ft-lb	18 3/4	2 3/4	1 3/8	PBR5
1/2	TER250	–	–	340 N•m	10 N•m	250 ft-lb	10 ft-lb	23 3/4	2 3/4	1 3/8	PB8A
3/4	TER352A	TER352FUA	TER352LA	480 N•m	10 N•m	350 ft-lb	5 ft-lb	29 7/8	3 1/4	1 3/8	PB39
3/4	TER602A	TER602FUA	TER602LA	800 N•m	20 N•m	600 ft-lb	20 ft-lb	40 7/8	3 1/4	1 25/32	PB39
1	TER1003**	–	TER1003L**	1360 N•m	20 N•m	1000 ft-lb	20 ft-lb	66 13/16	3 9/16	2 1/32	–

Wrenches in chart do not include certificate of calibration. Wrenches with a certificate of calibration are available by adding "C" to the end of the stock number.
*Does not include square drive dimension.
**Includes separately packed 92TQPA 4' tubular extension handle.
Basic model= 1 needle
Follow-up = 2 needles
Signal = signal light

All Snap-on® torque wrenches, drivers and testers are provided with a Certificate of Calibration (unless otherwise indicated).
All wrenches and drivers are calibrated per ASME® and ISO® standards for accuracy, from 20%–100% of full scale, using NIST® traceable equipment.

TEC175

TEC175L

Combination US/Metric Reading - Standard 2% Accuracy

Square Drive, inches	Basic Models Stock No.	Follow up Models Stock No.	Signal Models Stock No.	Metric Range	Metric Increments	US Range	US Increments	Length, inches	Width, inches	Head Depth*, inches	Storage Case
1/4	TEC1A	TEC1FUA	—	16 kg-cm	1 kg-cm	15 in-lb	.5 in-lb	9 29/32	2 11/16	1 1/4	PB9
1/4	TEC3A	TEC3FUA	—	35 kg-cm	1 kg-cm	30 in-lb	1 in-lb	9 29/32	2 11/16	1 1/4	PB9
1/4	TEC6A	TEC6FUA	—	90 kg-cm	2.5 kg-cm	75 in-lb	1 in-lb	9 29/32	2 11/16	1 1/4	PB9
3/8	TEC12A	TEC12FUA	TEC12LA	175 kg-cm	5 kg-cm	150 in-lb	5 in-lb	9 29/32	2 11/16	1 1/4	PB9
3/8	TEC25FA	TEC25FFUA	TEC25FLA	350 kg-cm	10 kg-cm	25 ft-lb	1 ft-lb	9 29/32	2 11/16	1 1/4	PB9
3/8	TEC50A	TEC50FUA	TEC50LA	700 kg-cm	20 kg-cm	600 in-lb	20 in-lb	12 1/2	2 11/16	1 1/4	PB9
1/2	TEC51	TEC51FU	TEC51L	700 kg-cm	20 kg-cm	600 in-lb	20 in-lb	15	2 11/16	1 5/16	—
1/2	TEC100	TEC100FU	TEC100L	14 kg-m	.5 kg-m	100 ft-lb	2 ft-lb	16	2 3/4	1 3/8	PBR5
1/2	TEC175	TEC175FU	TEC175L	25 kg-m	1 kg-m	175 ft-lb	5 ft-lb	18 3/4	2 3/4	1 3/8	PBR5
1/2	TEC250	TEC250FU	TEC250L	35 kg-m	1 kg-m	250 ft-lb	10 ft-lb	23 3/4	2 3/4	1 3/8	PB8A
3/4	TEC352A	TEC352FUA	TEC352LA	50 kg-m	1 kg-m	350 ft-lb	10 ft-lb	29 7/8	3 1/4	1 25/32	PB39
3/4	TEC602A	TEC602FUA	TEC602LA	80 kg-m	2 kg-m	600 ft lb	20 ft-lb	40 7/8	3 1/4	1 25/32	PB39
1	TEC803**	TEC803FU**	TEC803L**	110 kg-m	2 kg-m	800 ft-lb	25 ft-lb	66 13/16	3 9/16	2 1/32	—
1	—	—	TEC1003L**	136 kg-m	2 kg-m	1000 ft-lb	20 ft-lb	66 13/16	3 9/16	2 1/32	—
1	—	TEC1503FU†	TEC1503L†	200 kg-m	5 kg-m	1500 ft-lb	25 ft-lb	80	4 13/32	2 1/8	—
1	—	TEC2003FU†	TEC2003L†	280 kg-m	5 kg-m	2000 ft-lb	50 ft-lb	80	4 13/32	2 1/8	—
1 1/2	TEC2005†	TEC2005FU†	TEC2005L†	280 kg-m	5 kg-m	2000 ft-lb	50 ft-lb	80	4 13/32	2 3/8	—
1 1/2	—	TEC3005FU	TEC3005L	400 kg-m	5 kg-m	3000 ft-lb	50 ft-lb	140	5 1/2	2 13/16	—

Wrenches in chart do not include certificate of calibration. Wrenches with a certificate of calibration are available by adding "C" to the end of the stock number.
*Does not include square drive dimension.
**Includes separately packed 92TQPA 4' tubular extension handle.
†Includes separately packed 93TQPA 5' tubular extension handle.
Basic model= 1 needle
Follow-up = 2 needles
Signal = signal light

T-HANDLE *TORQOMETER* TORQUE WRENCHES

TEX602TLA

85TQP

TEXC2003TFU

US Reading Standard - 2% Accuracy

Input Drive Female Sq, inches	Output Drive Male Sq, inches	Follow up Models Stock No.	Light Signal Models Stock No.	US Range, ft-lb	US Increments, ft-lb	Metric Range, kg-m	Metric Increments, kg-m	Length, inches	Width, inches	Head Depth, inches	Optional "T" Bars/Extension Handles: "T" Bars	Length, inches	Ext., inches	Length, inches
3/4	3/4	TEX602TFUA	TEX602TLA	600	10	—	—	9	3 1/4	3 3/4	79TQP	45	—	—
3/4	1	TEX1003TFUA	TEX1003TLA	1,000	10	—	—	9 7/8	3 5/8	4 1/8	81TQP	66	—	—
1	1	—	TEX2003TL	2,000	25	—	—	10 7/8	4 3/8	4 7/16	82TQP	18	85TQP	31
1	1 1/2	TEX2005TFU	—	2,000	25	—	—	10 7/8	4 3/8	4 7/16	82TQP	18	85TQP	31

Wrenches in chart do not include certificate of calibration.
Wrenches with a certificate of calibration are available by adding "C" to the end of the stock number.
Follow-up = 2 needles
Signal = signal light

Combination US/Metric Reading

Input Drive Female Sq, inches	Output Drive Male Sq, inches	Follow up Models Stock No.	Light Signal Models Stock No.	US Range, ft-lb	US Increments, ft-lb	Metric Range, kg-m	Metric Increments, kg-m	Length, inches	Width, inches	Head Depth, inches	"T" Bar	Length, inches	Ext., inches	Length, inches
3/4	3/4	TEXC602TFUA	TEXC602TLA	600	20	80	2	9	3 1/4	3 3/4	79TQP	45	—	—
3/4	1	TEXC1003TFUA	TEXC1003TLA	1000	20	136	2	9 7/8	3 5/8	4 1/8	81TQP	66	—	—
1	1	TEXC2003TFU	TEXC2003TL	2000	50	280	5	10 7/8	4 3/8	4 7/16	82TQP	18	85TQP	31

Wrenches in chart do not include certificate of calibration.
Wrenches with a certificate of calibration are available by adding "C" to the end of the stock number.
Follow-up = 2 needles
Signal = signal light

⚠WARNING

- Do not exceed rated torque
- Do not use to break fasteners loose
- Periodic recalibration is necessary to maintain accuracy
- Read safety precautions on pages W1 to W4

TORQOMETER® TORQUE DRIVERS – 1/4" DRIVE

US Reading – Standard 2% Accuracy

Standard Basic Models Stock No.	Standard Follow up Models Stock No.	Length, inches	Stubby Basic Models Stock No.	Stubby Follow up Models Stock No.	Length, inches	Range	Increments
TQS025A	TQS025FUA	7 3/4	TQSS025A	TQSS025FUA	5 1/4	48 in-oz/ 3 in-lb	1 in-oz/ 1/16 in-lb
TQS050A	TQS050FUA	7 3/4	TQSS050A	TQSS050FUA	5 1/4	96 in-oz/ 6 in-lb	2 in-oz/ 1/8 in-lb
TQS1A	TQS1FUA	7 3/4	TQSS1A	TQSS1FUA	5 1/4	192 in-oz/ 12 in-lb	4 in-oz/ 1/4 in-lb
TQS2A	TQS2FUA	7 3/4	TQSS2A	TQSS2FUA	5 1/4	384 in-oz/ 24 in-lb	8 in-oz/ 1/2 in-lb
TQS2.5A	TQS2.5FUA	7 3/4	TQSS2.5A	TQSS2.5FUA	5 1/4	480 in-oz/ 30 in-lb	12 in-oz/ 1 in-lb
TQS4A*	TQS4FUA*	8 11/16	TQSS4A*	TQSS4FUA*	5 1/4	50 in-lb	1 in-lb
TQS6A*	TQS6FUA*	8 11/16	TQSS6A*	TQSS6FUA*	5 1/4	75 in-lb	1 in-lb

Wrenches in chart do not incude certificate of calibration. Wrenches with a certification of calibration are available by adding "C" to the end of the stock number. All wrenches include PB47 Storage Case.
*Includes 1/4" internal square drive in handle
Basic model = 1 needle
Follow-up = 2 needles

TQSC4FUA

Combination US/Metric Reading – Standard 2% Accuracy

Standard Basic Models Stock No.	Standard Follow up Models Stock No.	Length, inches	Stubby Basic Models Stock No.	Stubby Follow up Models Stock No.	Length, inches	Range	Increments
–	TQSC1FUA	7 3/4	–	TQSSC1FUA	5 1/4	17 kg-cm/ 15 in-lb	.5 kg-cm/ .5 in-lb
–	TQSC2.5FUA	7 3/4	–	TQSSC2.5FUA	5 1/4	35 kg-cm/ 30 in-lb	1.000 kg-cm/ 1.0 in-lb
–	TQSC4FUA*	8 11/16	–	TQSSC4FUA*	5 1/4	56 kg-cm/ 50 in-lb	2 kg-cm/ 2 in-lb
–	TQSC6FUA	—	–	TQSSC6FUA*	5 1/4	90 kg-cm/ 75 in-lb	3 kg-cm/ 5 in-lb

Wrenches in chart do not incude certificate of calibration. Wrenches with a certification of calibration are available by adding "C" to the end of the stock number. All wrenches include PB47 Storage Case.
*Includes 1/4" internal square drive in handle
Basic model = 1 needle
Follow-up = 2 needles

Combination US/Newton Meter Reading – Standard 2% Accuracy**

Standard Basic Models Stock No.	Standard Follow up Models Stock No.	Length, inches	Stubby Basic Models Stock No.	Stubby Follow up Models Stock No.	Length, inches	Range	Increments
–	TQSR1FUA	7 3/4	–	–	—	1.6 N•cm/ 15 in-lb	5 N•cm/ .25 in-lb
–	TQSR2.5FUA	7 3/4	–	–	—	3.4 N•m/ 30 in-lb	.1 N•m/ 1 in-lb
–	TQSR4FUA*	8 11/16	–	–	—	5.5 N•m/ 50 in-lb	.1 N•m/ 1 in-lb
–	TQSR6FUA*	8 11/16	–	–	—	8.4 N•m/ 75 in-lb	.2 N•m/ 5 in-lb

Wrenches in chart do not include certificate of calibration. Wrenches with a certificate of calibration are available by adding "C" to the end of the stock number. All wrenches include PB47 Storage Case.
*Includes 1/4" internal square drive in handle. Follow-up = 2 needles.
**Precise 1% models are available on special order.
ANSI® Spec. B107.300 applies to all these models.

TORQUE ANGLE GAUGES

TA362

TA358 Torque Angle Gauge
- Determines angle controlled torque tightening
- Allows user to follow manufacturer's specifications
- Use on automotive, diesel and industrial equipment plus head bolts and rod bolts on motorcycles
- 3/8" square drive

TA362 Torque Angle Gauge
- Allows user to follow manufacturer's specifications
- Calibrated in degrees in large, easy-to-read increments
- 3/4" square drive

TA360 Torque Angle Gauge
- Similar to TA362 except 1/2" square drive

All Snap-on® torque wrenches, drivers and testers are provided with a Certificate of Calibration (unless otherwise indicated).
All wrenches and drivers are calibrated per ASME® and ISO® standards for accuracy, from 20%–100% of full scale, using NIST® traceable equipment.

QDRIVER3P

Preset Torque Screwdrivers - ±6% Accuracy

- Ideal for low torque assemblies and precision applications
- Drivers accept all standard 1/4" hex screwdriver bits
- Cam over torque limiting clutch-free wheels when set torque is achieved
- Accuracy is ±6% from 20%–100% of full scale in clockwise direction only for all drivers in series
- Lightweight construction features aluminum body with stainless-steel shank
- Comfortable ergonomic trilobe grip and magnetic bit retention
- Not supplied with certificate of calibration

Stock No.	Range, min	Range, max	Length, inches
QDRIVER1P	6 in-oz (4 N•cm)	32 in oz. (22 N•cm)	4 9/16"
QDRIVER2P	10 in-oz (7 N•cm)	100 in-oz (70 N•cm)	5 5/8"
QDRIVER3P	1.5 in-lb (16 N•cm)	15 in-lb (169 N•cm)	5 5/8"
QDRIVER4P	4 in-lb (45 N•cm)	40 in-lb (451 N•cm)	6"

ASME B107.300-2010 Type III, Class A, Style 2, Design A

QDRIVER3

Adjustable Torque Screwdrivers - ±6% Accuracy

- Ideal for low torque assemblies, precision applications and dash/under dash work on most US and imported vehicles
- Drivers accept all standard 1/4" hex screwdriver bits
- Cam over torque limiting clutch-free wheels when set torque is achieved
- Accuracy is ±6% from 20%–100% of full scale in clockwise direction only for all drivers in series
- Lightweight construction features aluminum body with stainless-steel shank
- Comfortable ergonomic trilobe grip and magnetic bit retention

Stock No.	Range	Resolution	Length, inches
QDRIVER2	20–100 in-oz (14–70 N•cm)	1 in-oz	5 7/16
QDRIVER3	3–15 in-lb (34–169 N•cm)	.2 in-lb	6 1/4
QDRIVER4	5–40 in-lb (56–451 N•cm)	.5 in-lb	6 11/16
QDRIVER4NM	90–450 N•cm	—	6 11/16

ASME B107.300-2010 Type III, Class A, Style 1, Design A

QTS135

Torque Limiting Drivers - ±4% Accuracy

QTS135 Adjustable Limiting Driver

- Micrometer type adjustment
- Clutch allows 25° of free rotation on reaching set torque
- Guaranteed accuracy: within ±4% of setting from 20% of capacity to full capacity clockwise and counterclockwise

QTSP135 US Preset Limiting Driver

- Clutch mechanism to help prevent over torquing by allowing free rotation upon reaching the set torque value
- Ideal selection for assembly line work where the same requirement is constant
- Can be reset at different torque values or readjusted for accuracy whenever necessary with a torque tester

Stock No.	Range, minimum	Range, maximum	Increments	Length, inches
QTS135	5 in-lb	35 in-lb	0.5 in-lb	7
QTSP135	5 in-lb	35 in-lb	0.5 in-lb	7 1/2

- Torque limit is preset at the factory so user should specify the desired torque limit when ordering

QDRIVER4NMA

Adjustable Torque Drivers

- 1/4" square drive end complements earlier QDRIVER models with 1/4" hex bit holders
- Pin retains the socket to the square drive
- Freewheels 90° when specified torque is obtained — competitive units without this freewheeling feature can cause overtorquing of the fasteners
- Torques only in the clockwise direction; accuracy within ± 6% (from 20%–100% full scale)
- New textured body provides a nonslip grip
- Comfortable ergonomic tri-lobe grip — prevents the device from rolling off a flat surface and being damaged
- Lightweight yet rugged construction
- Easy-to-read torque setting
- Certificate of Calibration included — ensures accuracy in conformance to ASME® B107.300-2010 (B107.14) and ISO 6789:2003
- Torque screwdrivers calibrated to torque standards of the National Institute of Standards Technology (NIST®)

Stock No.	Range	Increments	Length, inches
QDRIVER2A	20–100 in-oz (14–70 N•cm)	1 in-oz	5 7/16
QDRIVER3A	3–15 in-lb (34–169 N•cm)	0.2 in-lb	6 1/4
QDRIVER4A	5–40 in-lb (56–451 N•cm)	0.5 in-lb	6 11/16
QDRIVER4NMA	90–450 N•cm	5.0 N•cm	6 11/16

⚠WARNING

- Do not exceed rated torque
- Do not use to break fasteners loose
- Periodic recalibration is necessary to maintain accuracy
- Read safety precautions on pages W1 to W4

INTERCHANGEABLE HEADS

QC1I200

Torque Wrench Bodies/Adjustable/ ±4% Accuracy

Interchangeable heads permit ratcheting, fixed or open end torquing capability with either adjustable or preset torque wrench bodies. A push of the locking pin provides quick change action, with a wide range of head styles to choose from.

- Selection: there are two adjustable models for quickly setting desired torque and eight preset models for assembly line work
- Slim profile: each torque body is thin enough and long enough to get into tight areas
- Micrometer type adjustment: ensures fast, accurate settings and changes
- Guaranteed accuracy: all QC series interchangeable torque wrenches are accurate ±4% clockwise and ±6% counterclockwise from 20% to 100% of full scale

Stock No.	Model Type	Shank Diameter	Range	Increments	Length, inches
QC1I200	Adjustable	J (0.425")	40–200 in-lb	1 in-lb	9 3/8
QC2I75	Adjustable	J (0.425")	5–75 ft-lb	.5 ft-lb	13

QC1P300

QC3P200

Torque Wrench Bodies/ Preset/±4% Accuracy

Stock No.	Model Type	Shank Diameter	Range	Length, inches
QC1P60	Preset	J (0.425")	10–60 in-lb (1.1–6.8 N•m)	6
QC1P100	Preset	J (0.425")	15–100 in-lb (1.7–11.3 N•m)	8
QC1P300	Preset	J (0.425")	60–300 in-lb (6.8–33.9 N•m)	10
QC2P75	Preset	J (0.425")	5–75 ft-lb (7–100 N•m)	11
QC3P150	Pre-set	Y (0.560")	30–150 ft-lb (41–203 N•m)	23
QC3P200	Preset	Y (0.560")	40–200 ft-lb (55–270 N•m)	23
QC4P300	Preset	X (0.735")	60–300 ft-lb (82–400 N•m)	27

QD3IN200

Torque Wrench Bodies/Adjustable/Dual Range

- Plug and play system of interchangeable heads are consistently sized from pin to the center of the fastener, so no adjustment calculations are needed
- Includes certificate of calibration
- Minimal friction "Hour Glass" cam retains and releases lubricant where needed to reduce friction
- Push buttons for quick release of interchangeable head
- Laser etched scale for easier reading in varying light sources
- Positive stop ensures instrument cannot be accidentally disassembled if wound down past scale
- Each instrument comes in a molded storage case for long-term protection

Stock No.	Range, N•m	Range, ft-lb	Increments	Shank Type	Weight, lb (kg)	Length, inches (mm)
QD2IN50	10–50	9.2–35.0	0.5 N•m/0.4 ft-lb	J	2.3 (1.12)	14 1/2 (368)
QD2IN100	20–100	16.6–71.9	0.5 N•m/0.4 ft-lb	J	2.3 (1.12)	14 1/2 (368)
QD3IN200	40–200	37–140	2 N•m/1.2 ft-lb	Y	3.36 (1.64)	23 (584)
QD3IN350	70–350	59–251	2 N•m/1.2 ft-lb	X	3.36 (1.64)	23 (584)
QD4IN800*	150–800	129–572	5 N•m/4.3 ft-lb	Z	11.14 (5.46)	41 1/2 (1054)

*For use with dual pin heads only
ASME® B107.300

All Snap-on® torque wrenches, drivers and testers are provided with a Certificate of Calibration (unless otherwise indicated). All wrenches and drivers are calibrated per *ASME* and ISO® standards for accuracy, from 20%–100% of full scale, using NIST® traceable equipment.

Square Drive Heads/Ratcheting

Allow use of torque wrench bodies on previous page with sockets, crowfoot wrenches or other similar attachment.

Square Drive, inches	J (0.425")	Y (0.560")	X (0.735")	Z (0.990")	Head O.D., inches	Depth, inches	Center of Fastener to Retaining Pin	Ratchet Service Kit
1/4	QJD8A-72*	–	–	–	17/32	9/64	QJD Series – 2.50"	RKRT72A
3/8	QJD12A*(60)	QYD12A*(100)	–	–	21/32	11/64	QYD Series – 3.00"	RKRF936
1/2	QJD16A*(60)	QYD16A*(240)	QXD16A*(240)	–	21/32	11/64	QXD Series – 4.50"	RKRS936
3/4	–	–	QXD24A(240)	QZD24BDP(480)	25/32	11/64	QZD Series – 5.75"	RKRQC4
1	–	–	QXD32A(240)	QZD32BDP(480)	29/32	11/64	–	RKRQC5

QJD12A

*US Patent #6,125,722
Value in parentheses in chart is the Maximum Recommended Working Torque, ft-lb

Square Drive Heads/Fixed

Allow use of torque wrench bodies on previous page with sockets, crowfoot wrenches or other similar attachments.

Square Drive, inches	J (0.425")	Y (0.560")	X (0.735")	Z (0.990")	Center of Fastener to Retaining Pin
1/4	QJSD8A(60)	–	–	–	QJD Series – 2.50"
3/8	QJSD12A(60)	QYSD12A(100)	–	–	QYD Series – 3.00"
1/2	QJSD16A(60)	QYSD16A(240)	QXSD16A (240)	–	QXD Series – 4.50"
3/4	–	–	QXSD24A(240)	QZSD24ADP(480)	QZD Series – 5.75"
1	–	–	QXSD32A(240)	QZSD32ADP(480)	–

QYSD16A

Value in parentheses is the Maximum Recommended Working Torque, ft-lb

Ratcheting Box End Heads, 12-Point, mm

- Ratcheting box head allows constant contact with the fastener
- Plug and play shanks are consistently sized from pin to the center of the fastener, so no adjustment calculations are needed
- Reverse lever is located on top of the head to reduce the chance of accidental ratchet reversal

mm	Stock No.	Shank Diameter	O.D., mm	Head Depth, mm
10	QJBOERM10A	J (0.425")	21.9	5.0
13	QJBOERM13A	J (0.425")	25.9	6.3
16	QJBOERM16A	J (0.425")	33.6	7.0
17	QJBOERM17A	J (0.425")	36.5	7.0
18	QJBOERM18A	J (0.425")	38.5	8.0
19	QJBOERM19A	J (0.425")	38.7	8.7
22	QJBOERM22A	J (0.425")	45.7	9.4
24	QJBOERM24A	J (0.425")	49.5	11.2
18	QYBOERM18A	Y (0.560")	38.5	8.0
24	QYBOERM24A	J (0.560")	49.5	11.2

QJBOERM16A

Ratcheting Box End Heads, 12-Point, inches

	Stock No.	Shank Diameter	O.D., inches	Head Depth, inches
3/8	QJBOER12A	J (0.425")	7/8	3/16
7/16	QJBOER14A	J (0.425")	15/16	7/32
1/2	QJBOER16A	J (0.425")	1 1/32	1/4
9/16	QJBOER18A	J (0.425")	1 3/16	1/4
5/8	QJBOER20A	J (0.425")	1 5/16	9/32
3/4	QJBOER24A	J (0.425")	1 17/32	11/32
9/16	QYBOER18A	Y (0.560")	1 3/16	1/4
5/8	QYBOER20A	Y (0.560")	1 5/16	9/32
11/16	QYBOER22A	Y (0.560")	1 3/16	1 1/4
3/4	QYBOER24A	Y (0.560")	1 17/32	11/32

QJBOER16A

Ratcheting Pipe Wrench Heads, inches

	Stock No.	Shank Diameter	O.D., inches	Head Depth, inches
2	RPWH128Z	Z (0.990")	3 1/4	.665

RPWH128YZ

Value in parentheses is the Maximum Recommended Working Torque, ft-lb

⚠WARNING

- Do not exceed rated torque
- Do not use to break fasteners loose
- Periodic recalibration is necessary to maintain accuracy
- Read safety precautions on pages W1 to W4

INTERCHANGEABLE HEAD, CLICK-TYPE TORQUE WRENCHES

QYXM21A

Center of fastener to retaining pin:
- **QJXM** Series – 2 .50"
- **QYXM** Series – 3.00"
- **QXXM** Series – 4.50"
- **QZXM** Series – 5.75"

12-Point Box End Heads, mm

mm	J (0.425")	Y (0.560")	X (0.735")	Z (0.990")	O.D., mm	Head Depth, mm
6	QJXM6A(15)	–	–	–	11	5
7	QJXM7A(20)	–	–	–	11	5
8	QJXM8A(22)	–	–	–	13	6
9	QJXM9A(30)	–	–	–	14	6
10	QJXM10A(53)	–	–	–	15	7
11	QJXM11A(59)	–	–	–	17	8
12	QJXM12A(60)	–	–	–	18	8
13	QJXM13A(60)	–	–	–	20	9
14	QJXM14A(60)	QYXM14A(117)	QXXM14A(117)	–	21	9
15	QJXM15A(60)	QYXM15A(148)	–	–	22	10
16	QJXM16A(60)	QYXM16A(160)	QXXM16A(183)	–	24	10
17	QJXM17A(60)	QYXM17A(160)	QXXM17A(197)	–	25	11
18	QJXM18A(60)	QYXM18A(160)	QXXM18A(224)	–	27	12
19	QJXM19A(60)	QYXM19A(160)	QXXM19A(238)	–	28	12
20	QJXM20A(60)	QYXM20A(160)	QXXM20A(240)	–	30	13
21	QJXM21A(60)	QYXM21A(160)	QXXM21A(240)	–	31	13
22	QJXM22A(60)	QYXM22A(160)	QXXM22A(240)	–	32	14
23	QJXM23A(60)	QYXM23A(160)	QXXM23A(240)	–	34	15
24	QJXM24A(60)	QYXM24A(160)	QXXM24A(240)	QZXM24ADP(375)	35	15
25	–	–	QXXM25A(240)	QZXM25ADP(413)	37	16
26	QJXM26A(60)	QYXM26A(160)	–	QZXM26ADP(448)	38	16
27	QJXM27A(60)	QYXM27A(160)	QXXM27A(240)	QZXM27ADP(480)	39	17
29	–	QYXM29A(160)	QXXM29A(240)	QZXM29ADP(480)	42	18
30	–	QYXM30A(160)	QXXM30A(240)	QZXM30ADP(480)	44	19
32	–	QYXM32A(160)	QXXM32A(240)	QZXM32ADP(480)	46	19
34	–	QYXM34A(160)	QXXM34A(240)	QZXM34ADP(480)	48	19
36	–	QYXM36A(160)	QXXM36A(240)	QZXM36ADP(480)	53	22

Value in parentheses is the Maximum Recommended Working Torque, ft-lb

QJX12A

QXX52A

Center of fastener to retaining pin:
- **QJX** Series – 2.50"
- **QYX** Series – 3.00"
- **QXX** Series – 4.50"
- **QZX** Series – 5.75"

12-Point Box End Heads, inches

11	J (0.425")	Y (0.560")	X (0.735")	Z (0.990")	O.D., inches	Head Depth, inches
1/4	QJX8A(18)	–	–	–	13/32	3/16
9/32	QJX9A(41)	–	–	–	13/32	3/16
3/8	QJX12A(60)	–	–	–	9/32	1/4
7/16	QJX14A(60)	–	–	–	21/32	5/16
1/2	QJX16A(60)	QYX16A(75)	–	–	3/4	11/32
9/16	QJX18A(60)	QYX18A(112)	–	–	27/32	3/8
5/8	QJX20A(60)	QYX20A(160)	–	–	15/16	13/32
11/16	QJX22A(60)	QYX22A(160)	–	–	1 1/32	7/16
3/4	QJX24A(60)	QYX24A(160)	QXX24A(219)	–	1 1/8	15/32
13/16	QJX26A(60)	QYX26A(160)	QXX26A(240)	QZX26ADP(275)	1 3/16	17/32
7/8	QJX28A(60)	QYX28A(160)	QXX28A(240)	–	1 9/32	9/16
15/16	QJX30A(60)	QYX30A(160)	QXX30A(240)	–	1 3/8	19/32
1	QJX32A(60)	QYX32A(160)	QXX32A(240)	–	1 15/32	21/32
1 1/16	QJX34A(60)	QYX34A(160)	–	QZX34ADP(300)	1 9/16	11/16
1 1/8	–	QYX36A(160)	QXX36A(240)	QZX36ADP(480)	1 5/8	11/16
1 3/16	–	QYX38A(160)	QXX38A(240)	QZX38ADP(480)	1 3/4	3/4
1 1/4	–	QYX40A(160)	QXX40A(240)	QZX40ADP(480)	1 13/16	3/4
1 5/16	–	QYX42A(160)	QXX42A(240)	QZX42ADP(480	1 29/32	3/4
1 3/8	–	–	QXX44A(240)	QZX44ADP(480)	2	3/4
1 7/16	–	–	QXX46A(240)	QZX46ADP(480)	2 1/16	7/8
1 1/2	–	QYX48A(160)	QXX48A(240)	QZX48ADP(480)	2 5/32	7/8
1 9/16	–	–	QXX50A(240)	QZX50ADP(480)	2 1/4	7/8
1 5/8	–	QYX52A(160)	QXX52A(240)	QZX52ADP(480)	2 11/32	7/8
1 11/16	–	–	–	QZX54ADP(480)	2 7/16	7/8
1-3/4	–	–	QXX56A(240)	QZX56ADP(480)	2 17/32	1 1/32
1 13/16	–	–	QXX58A(240)	QZX58ADP(480)	2 5/8	1 1/32
1 7/8	–	–	QXX60A(240)	QZX60ADP(480)	2 11/32	1 1/32
2	–	–	QXX64A(240)	QZX64ADP(480)	2 7/8	1 1/32
2 1/16	–	–	–	QZX66ADP(480)	2 21/32	1 3/16
2 1/8	–	–	–	QZX68ADP(480)	3 1/16	1 3/16
2 1/4	–	–	–	QZX72ADP(480)	3 7/32	1 3/16
2 1/2	–	–	–	QZX80ADP(480)	3 19/32	1 5/16

Value in parentheses is the Maximum Recommended Working Torque, ft-lb

Box End Heads, 0° Offset, 12-Point, inches

	Stock No.	Shank Diameter	Maximum Working Torque, ft-lb
3/8	QJXD12A	J (0.425")	60
7/16	QJXD14A	J (0.425")	60
1/2	QJXD16A	J (0.425")	60
9/16	QJXD18A	J (0.425")	60
11/16	QJXD22A	J (0.425")	60
3/4	QJXD24A	J (0.425")	60
7/8	QJXD28A	J (0.425")	60
15/16	QJXD30A	J (0.425")	60
1	QJXD32A	J (0.425")	60
5/8	QYXD20A	Y (0.560")	160
11/16	QYXD22A	Y (0.560")	160
3/4	QYXD24A	Y (0.560")	160
15/16	QYXD30A	Y (0.560")	160

Value in parentheses is the Maximum Recommended Working Torque, ft-lb

Center of fastener to retaining pin:
- **QJXD** Series – 2.50"
- **QYXD** Series – 3.00"

Box End Heads, 10° Offset, 12-Point, mm

mm	Stock No.	Shank Diameter	Maximum Working Torque, ft-lb
11	QJXBM11A	J (0.425")	59
12	QJXBM12A	J (0.425")	60
13	QJXBM13A	J (0.425")	60
14	QJXBM14A	J (0.425")	60
16	QJXBM16A	J (0.425")	60
18	QJXBM18A	J (0.425")	60
19	QJXBM19A	J (0.425")	60
18	QYXBM18A	Y (0.560")	160
24	QYXBM24A	Y (0.560")	160

Value in parentheses is the Maximum Recommended Working Torque, ft-lb

Center of fastener to retaining pin:
- **QJXBM** Series – 2.50"
- **QYXBM** Series – 3.00"

Box End Heads, 10° Offset, 12-Point, inches

	Stock No.	Shank Diameter	Maximum Working Torque, ft-lb
1/2	QJXB16A	J (0.425")	60
9/16	QJXB18A	J (0.425")	60
5/8	QJXB20A	J (0.425")	60
11/16	QJXB22A	J (0.425")	60
3/4	QJXB24A	J (0.425")	60
5/8	QYXB20A	Y (0.560")	79
3/4	QYXB24A	Y (0.560")	160
7/8	QYXB28A	Y (0.560")	160
15/16	QYXB30A	Y (0.560")	160
1	QYXB32A	Y (0.560")	160
1 1/8	QYXB36A	Y (0.560")	160
1 3/8	QXXB44A	X (0.735")	240
1 1/2	QXXB48A	X (0.735")	240

Value in parentheses is the Maximum Recommended Working Torque, ft-lb

Center of fastener to retaining pin:
- **QJXB** Series – 2.50"
- **QYXB** Series – 3.00"
- **QXXB** Series – 4.50"

Box End Heads, 40° Bend, 12-Point, mm

mm	Stock No.	Shank Diameter	Center of Fastener to Retaining Pin
18	QYSBXM18A	Y (0.560")	QYSBXM Series – 3.00"
24	QYSBXM24A	Y (0.560")	QYSBXM Series – 3.00"

Value in parentheses is the Maximum Recommended Working Torque, ft-lb

QYSBXM18A

Center of fastener to retaining pin:
- **QYSBXM** Series – 3.00"

WARNING

- Do not exceed rated capacity
- Do not use to break fasteners loose
- Periodic recalibration is necessary to maintain accuracy
- Read safety precautions on pages W1 to W4

INTERCHANGEABLE HEADS

QYOM32A

Center of fastener to retaining pin:
- **QJO** Series – 2.50"
- **QYO** Series – 3.00"

Thin Open End Heads, inches

	Stock No.	Shank Diameter	Maximum Working Torque, ft-lb
11/16	QJO22ARTH60	J (0.425")	60
1	QJO32ARTH	J (0.425")	60
1 1/16	QJO34ARTH	J (0.425")	60
1 1/8	QJO36ARTH	J (0.425")	60
1 3/16	QJO38ARTH	J (0.425")	60
1 1/4	QJO40ARTH	J (0.425")	60
1 3/8	QJO44ARTH	J (0.425")	60
1 1/2	QJO48ARTH	J (0.425")	60
1 9/16	QJO50ARTH	J (0.425")	60
1 5/8	QJO52ARTH	J (0.425")	60
1 3/4	QJO56ARTH	J (0.425")	60
1 7/8	QJO60ARTH	J (0.425")	60
2	QJO64ARTH	J (0.425")	60
2 1/16	QJO66ARTH	J (0.425")	60
2 11/16	QJO86ARTH	J (0.425")	60
1 5/8	QYO52ARTH	Y (0.560")	160
1 3/4	QYO56ARTH	Y (0.560")	160
1 7/8	QYO60ARTH	Y (0.560")	160
2	QYO64ARTH	Y (0.560")	160
2 1/8	QYO68ARTH	Y (0.560")	160
2 1/4	QYO72ARTH	Y (0.560")	160

Center of fastener to retaining pin:
- **QJOM** Series – 2.50"
- **QYOM** Series – 3.00"
- **QXOM** Series – 4.50"
- **QZOM** Series – 5.75"

Open End Heads, mm

mm	J (0.425")	Y (0.560")	X (0.735")	Z (0.990")	O.D., mm	Head Depth, mm
6	QJOM6A*(5)	–	–	–	13.5	3.6
7	QJOM7A*(6)	–	–	–	13.5	3.6
8	QJOM8A*(10)	–	–	–	16.5	3.3
9	QJOM9A(14)	–	–	–	19.8	4.8
10	QJOM10A(22)	–	–	–	19.8	4.8
11	QJOM11A(33)	–	–	–	22.9	5.6
12	QJOM12A(36)	–	–	–	26.9	6.1
13	QJOM13A(41)	–	–	–	26.9	6.1
14	QJOM14A(55)	QYOM14A(55)	–	–	29.5	6.6
15	QJOM15A(60)	QYOM15A(74)	–	–	33.3	6.9
16	QJOM16A(60)	QYOM16A(88)	–	–	33.3	6.9
17	QJOM17A(60)	QYOM17A(103)	QXOM17A(103)	–	37.1	7.3
18	QJOM18A(60)	QYOM18A (115)	QXOM18A(115)	–	37.1	7.3
19	QJOM19A(60)	QYOM19A(138)	QXOM19A(138)	–	40.4	7.6
20	QJOM20A(60)	QYOM20A(160)	QXOM20A(160)	–	43.7	9.2
21	QJOM21A(60)	QYOM21A(160)	QXOM21A(180)	–	43.7	9.2
22	QJOM22A(60)	QYOM22A(160)	QXOM22A(206)	–	43.7	9.2
23	QJOM23A(60)	QYOM23A(160)	QXOM23A(229)	–	47	10
24	QJOM24A(60)	QYOM24A(160)	QXOM24A(240)	QZOM24ADP(250)	49	11
25	QJOM25A(60)	QYOM25A(160)	QXOM25A(240)	QZOM25ADP(275)	52	11
26	QJOM26A(60)	QYOM26A(160)	QXOM26A(240)	QZOM26ADP(298)	53	11
27	QJOM27A(60)	QYOM27A(160)	QXOM27A(240)	QZOM27ADP(319)	55	12
29	QJOM29A(60)	QYOM29A(160)	QXOM29A(240)	QZOM29ADP(379)	58	12
30	QJOM30(60)	QYOM30A(160)	QXOM30A(240)	QZOM30ADP(413)	61	13
32	QJOM32(60)	QYOM32A(160)	QXOM32A(240)	QZOM32ADP(480)	65	14
34	–	QYOM34A(160)	QXOM34A(240)	QZOM34ADP(480)	68	14
36	QJOM36A(60)	QYOM36A(160)	QXOM36A(240)	QZOM36ADP(480)	74	15
41	–	QYOM41(160)	QXOM41A(240)	QZOM41ADP(480)	83	17
46	–	–	QXOM46 (240)	QZOM46ADP(480)	93	19
50	–	–	QXOM55A(240)	QZOM50ADP(480)	102	20
	–	–	–	QZOM55ADP(480)	115.1	3.6
60	–	–	–	QZOM60ADP(480)	125	27
	–	–	–	QZOM65ADP(480)	128.3	25.9
70	–	–	–	QZOM70ADP(480)	168	31

Value in parentheses is the Maximum Recommended Working Torque, ft-lb
*Use with QC1P100 and QC1I200 Torque bodies only; other heads may be used with all listed torque bodies.

Open End Heads, inches

	J (0.425")	Y (0.560")	X (0.735")	Z (0.990")	O.D., inches	Head Depth, inches
1/4	QJO8A*(5)	–	–	–	17/32	9/64
5/16	QJO10A(9)	–	–	–	21/32	11/64
3/8	QJO12A(18)	–	–	–	25/32	11/64
7/16	QJO14A(26)	–	–	–	29/32	11/64
1/2	QJO16A(34)	QYO16A(58)	–	–	1 1/16	11/64
9/16	QJO18A(58)	QYO18A(58)	–	–	1 1/16	9/32
5/8	QJO20A(60)	QYO20A(70)	–	–	1 5/16	9/32
11/16	QJO22A(60)	QYO22A(99)	–	–	1 7/16	5/16
3/4	QJO24A(60)	QYO24A(125)	QXO24A(125)	–	1 19/32	11/32
13/16	QJO26A(60)	QYO26A(160)	QXO26A(164)	–	1 23/32	3/8
7/8	QJO28A(60)	QYO28A(160)	–	–	1 23/32	3/8
15/16	QJO30A(60)	QYO30A(160)	QXO30A(200)	–	1 29/32	13/32
1	QJO32A(60)	QYO32A(160)	QXO32A(240)	QZO32ADP(298)	2 1/32	7/16
1 1/16	QJO34A(60)	QYO34A(160)	QXO34A(240)	QZO34ADP(480)	2 3/16	15/32
1 1/8	QJO36A(60)	QYO36A(160)	QXO36A(240)	QZO36ADP(367)	2 5/16	15/32
1 3/16	–	QYO38A(160)	QXO38A(240)	QZO38ADP(433)	2 7/16	1/2
1 1/4	QJO40A(60)	QYO40A(160)	QXO40A(240)	QZO40ADP(480)	2 9/16	17/32
1 5/16	–	QYO42A(160)	QXO42A(240)	QZO42ADP(480)	2 21/32	9/16
1 3/8	QJO44A(60)	QYO44A(160)	QXO44A(240)	QZO44ADP(480)	2 3/16	19/32
1 7/16	–	QYO46A(160)	QXO46A(240)	QZO46ADP(480)	3	19/32
1 1/2	QJO48A(60)	QYO48A(160)	QXO48A(240)	QZO48ADP(480)	3 1/16	5/8
1 9/16		QYO50A(160)	QXO50A(240)	QZO50ADP(480)	3 3/16	21/32
1 5/8	QJO52A(60)	QYO52A(160)	QXO52A(240)	QZO52ADP(480)	3 11/32	11/16
1 11/16	–	–	QXO54A(240)	QZO54ADP(480)	3 13/32	23/32
1 3/4	–	QYO56A(240)	QXO56A(240)	QZO56ADP(480)	3 9/16	23/32
1 13/16	–	–	QXO58A(240)	QZO58ADP(480)	3 21/32	13/32
1 7/8	–	QYO60A(240)	QXO60A(240)	QZO60ADP(480)	3 13/16	25/32
2	–	–	QXO64A(240)	QZO64ADP(480)	4 1/16	27/32
2 1/16	–	–	QXO66A(240)	QZO66ADP(480)	4 3/16	27/32
2 1/8	–	–	–	QZO68ADP(480)	4 5/16	5/8
2 1/4	–	QYO72(240)	–	QZO72ADP(480)	4 9/16	15/16
2 3/8	–	–	–	QZO76ADP(480)	4 1/2	3/4
2 1/2	–	–	–	QZO80ADP(480)	5 1/16	1
2 5/8	–	QYO84(240)	–	–	4 1/2	3/4
2 7/8	–	QYO92(240)	–	–	5 31/32	5/8

Value in parentheses is the Maximum Recommended Working Torque, ft-lb
*Use with QC1P100 and QC1I200 Torque Bodies only; other heads may be used with all listed torque bodies.

QJO28A

Center of fastener to retaining pin:
- **QJO** Series – 2.50"
- **QYO** Series – 3.00"
- **QXO** Series – 4.50"
- **QZO** Series – 5.75"

Ratcheting Flare Nut Head, 12-Point, mm

Size, mm	Stock No.	Shank Diameter
16	RTWHM16J	J (0.425")

Ratcheting Flare Nut Heads, 12-Point, inches

Size, inches	Stock No.	Shank Diameter
9/16	RTWH36J	J (0.425")
5/8	RTWH40J	J (0.425")
11/16	RTWH44J	J (0.425")
13/16	RTWH52J	J (0.425")
3/4	RTWH48Y	Y (0.560")
7/8	RTWH56Y	Y (0.560")
15/16	RTWH60Y	Y (0.560")
1	RTWH64Y	Y (0.560")
1 1/8	RTWH72Y	Y (0.560")
1 1/4	RTWH80Y	Y (0.560")
1 3/8	RTWH88Y	Y (0.560")
1 5/8	RTWH104Y	Y (0.560")
1 7/8	RTWH120Y	Y (0.560")
1 1/2	RTWH96X	X (0.735")

RTWH60Y

Center of fastener to retaining pin:
- **RTWHM** "J" Series – 2.50"
- **RTWH** "J" Series – 2.50"
- **RTWH** "Y" Series – 3.00"
- **RTWH** "X" Series – 4.50"

Adaptor

QZD32A-1 Z Shank to 1" square drive adaptor

⚠WARNING

- Do not exceed rated capacity
- Do not use to break fasteners loose
- Periodic recalibration is necessary to maintain accuracy
- Read safety precautions on pages W1 to W4

INTERCHANGEABLE HEADS

Flare Nut Heads, 6-Point, mm

mm	Shank Dia. J (0.425")	Shank Dia. Y (0.560")	O.D., mm	Head Depth, mm
10	QJRXSM10A(33)	–	20	8
11	QJRXSM11A(42)	–	21	9
12	QJRXSM12A(50)	–	22	9
13	QJRXSM13A(58)	–	24	9
14	QJRXSM14A(60)	–	25	10
16	–	QYRXSM16A(75)	27	11
17	QJRXSM17A(60)	QYRXSM17A(83)	29	11
18	QJRXSM18A(60)	QYRXSM18A(94)	30	12
19	QJRXSM19A(60)	QYRXSM19A(104)	32	12
20	–	QYRXSM20A(113)	33	13

Value in parentheses is the Maximum Recommended Torque, ft-lb

Flare Nut Heads, 6-Point, inches

	Shank Dia. J (0.425")	Shank Dia. Y (0.560")	O.D., inches	Head Depth, inches
7/16	QJRXS14A(42)	–	27/32	11/32
5/8	QJRXS20A(60)	QYRXS20A(74)	1 3/32	7/16
11/16	QJRXS22A(60)	QYRXS22A(92)	1 5/32	15/32
3/4	QJRXS24A(60)	QYRXS24A(104)	1 1/4	1/2
13/16	QJRXS26A(60)	QYRXS26A(117)	1 5/16	7/32
7/8	QJRXS28A(60)	QYRXS28A(133)	1 13/32	9/16
15/16	QJRXS30A(75)	QYRXS30A(146)	1 1/2	19/32
1	QJRXS32A(75)	QYRXS32A(158)	1 9/16	5/8
1 1/8	–	QYRXS36A(160)	1 3/4	11/16

Value in parentheses is the Maximum Recommended Working Torque, ft-lb

QYRX18A

Center of fastener to retaining pin:

- **QJRXSM** Series – 2.50"
- **QYRXSM** Series – 3.00"
- **QJRXS** Series – 2.50"
- **QYRXS** Series – 3.00"
- **QYRX** Series – 3.00"

Flare Nut Heads, 12-Point, inches

	Shank Dia. Y (0.560")	O.D., inches	Head Depth, inches
9/16	QYRX18A(67)	1	13/32
5/8	QYRX20A(79)	1 3/32	7/16
3/4	QYRX24A(104)	1 1/4	1/2
13/16	QYRX26A(117)	1 11/32	17/32
7/8	QYRX28A(133)	1 13/32	9/16
15/16	QYRX30A(146)	1 1/2	19/32
1	QYRX32A(158)	1 19/32	21/32
1 1/16	QYRX34A(160)	1 21/32	11/16
1 1/8	QYRX36A(160)	1 3/4	23/32
1 3/16	QYRX38A(160)	1 7/16	3/4
1 1/4	QYRX40A(160)	1 29/32	25/32

Value in parentheses is the Maximum Recommended Torque, ft-lb

GEARED HEAD MULTIPLIERS

YA391

YA394

Geared Head Multipliers

- Some models feature a replacement square drive to protect components by automatically shearing when rated output is exceeded by 3%–10%
- All models include an input/output conversion chart in ft-lb and N•m
- To determine correct input torque, divide desired output torque by the "Torque Ratio" listed in the chart

	YA290PLUS	YA300	YA391	YA292	YA392	YA393	YA394	YA395
Reaction Type	Bar	Bar	Bar	Bar	Bar	Bar	Plate	Plate
Output Capacity, ft-lb	750	1,000	1,200	2,000	2,200	3,200	5,000	8,000
Input Capacity, ft-lb	227	333	200	500	162	173	189	154
Gear Ratio	4:1	4.0:1	6.33:1	4.27:1	15.0:1	20.25:1	29.25:1	60.0:1
Torque Ratio	3:1	3.1:1*	6.0:1*	3.75:1*	13.6:1*	18.5:1*	26.5:1*	52.0:1*
Reductions	1	1	1	1	2	3	2	3
Input Drive Female Square, inches	1/2	1/2	1/2	3/4	1/2	1/2	1/2	1/2
Output Drive Male Square, inches	3/4	3/4	3/4	1	1	1	1 1/2	1 1/2
Bearings	—	—	Needle	—	Needle	Needle	Needle	Needle
Length, inches	8.75	17.06	19.56	19.5	19.6	19.6	14.88	15.22
Width, inches	2.75	2.81	4	4.5	4.06	4.06	5.63	5.81
Height, inches	3.25	3.25	3.94	3.75	5.75	6.54	8.75	10.75
Storage Case	Yes	—	Yes	—	Yes	Yes	**	**
Angle Protractor	—	—	Yes	—	Yes	Yes	—	—
Anti-Backlash	—	—	—	—	Yes	Yes	Yes	Yes
Replacement Square Drive	–	–	YA391RK	–	YA392RK	YA393RK	YA394RK	YA395RK

*Accuracy of Torque Ratio is ±5%. **Includes drawstring bag for storage and protection.
Handle or other anchor plate serves as a "reaction bar" and must be placed against a strong fixed object.

GEARED HEAD MULTIPLIERS

YA390 Reversible Air Motor
- Provides up to 200 ft-lb of input power for each of the YA Series Gear Multipliers
- Output drive: 1/2"
- Maximum operating air pressure: 60 PSIG
- Free speed: 70 RPM, Dimensions: 16 1/4" x 3 1/8" x 4 3/4"

YA390

Geared Head Multipliers X4 Models



- Use individually or stack up to three X4 models
- Stacking multiplies torque ratios; resulting torque can be considerable
- Only the torque ratio changes; total capacity is equal to and does not exceed the capacity of the largest wrench in the stack

	GA184A	GA185	GA190
Reaction Type	Bar	Bar	Bar
Output Capacity, ft-lb	1,000	2,000	2,000
Input Capacity, ft-lb	294	588	588
Gear Ratio	4.0:1	4.0:1	4.0:1
Torque Ratio	3.4:1*	3.4:1*	3.4:1*
Reductions	1	—	1
Input Drive Female Square, inches	1/2	3/4	3/4
Output Drive Male Square, inches	3/4	1	1
Dimension A, O.D., inches	3 1/2	3 3/4	3 3/4
Dimension B, Length, inches	6 5/8	6 5/8	6 5/8
Dimension C, Head Height, inches	1/2	3/4	1 1/2
Dimension D, Drive End Height, inches	3/4	1	1
Dimension E, Overall Height, inches	3 11/32	4 3/8	5
Overall Length, inches	22	25	25
Anti-Backlash	—	—	Yes

GA184A

GA190

*Accuracy of Torque Ratio is ±10%.
Handle or other anchor plate serves as a "reaction bar" and must be placed against a strong fixed object.

ELECTRONIC TORQUE WRENCHES

Electronic Dial Type Torque Wrenches

- Intended for worldwide automotive, nuclear, military and industrial markets
- Digital accuracy is ±1% from 20%–100% of full scale in CW and CCW
- Three-step LED visual signal system: Over torque alarm (Red), Approaching target warning signal when getting close (Yellow at 90% of target), and target achieved signal when desired torque is obtained (Green)
- Secondary audible alarm goes off when desired torque is reached
- Large storage capacity available: memory stores up to 4,000 torque values
- Downloading capability: individual torque values and store values in memory may be directly downloaded to a printer or data logger via an RS-232 connection
- Selectable modes of operation: "peak hold" and "track" modes of operation are standard
- Range: available from 5 in-lb–600 ft-lb engineering units can be selected through the keypad (in-oz, in-lb, ft-lb, N•m, dN•m, kg-m and kg-cm)
- Accuracy: ±1% from 10%–100% of scale
- Quality Construction: proven industrial quality
- 9V alkaline battery included

ED2600

Features:
- Display can be turned 180° to allow left hand usage
- Four units of measurement on the same torque wrench: in-lb, ft-lb, N•m, kg-cm
- Large 2" easy-to-read single scale eliminates confusion on conversion scales
- Tough polycarbonate body ensures durability
- Comfort cushion grip reduces strain for prolonged use
- Rubber boot protects work piece
- Composite and steel body beam provides years of accurate service
- Includes storage case
- 9V battery with long life and easy replacement, 80 hours
- Battery cover designed to be FOD proof

Stock No.	Square Drive, inches	in-lb	ft-lb	N•m	kg-cm	Length, inches (mm)	Weight, lb (kg)
ED1050*	1/4	10–50	.42–4.17	.56–5.65	5.7–57.61	11.5 (292)	1.25 (.57)
ED2250*	3/8	50–250	2.08–20.83	2.82–28.25	28–288.03	14.5 (368)	1.51 (.68)
ED2600*	3/8	60–600	5–50	6.79–67.79	69–691.27	14.5 (368)	1.51 (.68)

* CE

⚠WARNING

- Do not exceed rated torque
- Do not use torque wrenches to break fasteners loose
- Torque multipliers produce very high reaction force, use caution
- Read safety precautions on pages W1 to W4

TORQUE TESTERS

QC3DTT250

Digital Torque Tester™ (DTT)

The Snap-on® *Digital Torque Tester* is an advanced, highly-accurate tester that can be mounted on a wall or in a bench top vise to allow operator to conveniently test torque wrenches and torque screwdrivers. It features an easy-to-use color touch pad screen to capture peak torque values during a test in real time and download stored torque data to a PC. All DTT torque testers are sold in a kit with the complete tester, AC/DC power supply, USB cable adaptor and carrying case.

- Easy-to-use touch screen
- Testing options: quick check or ASME® style test
- Refresh rate of 1,000 data points per second
- Record and track torque wrench test results by serial number
- Choose your wrench type
- Adds traceability by using wrench serial numbers and technician I.D.
- Color-coded numbers indicate low, good and high torque readings
- Color bar at the top allows the user to see progress relative to the target torque
- Data can be stored for download later on your computer via USB

	QC2DTT250	QC3DTT250
Square Drive, inches	3/8	1/2
Range English	25-250 in-lb	25–250 ft-lb
Range, N•m	2.9-28.2	33.9–338.9
Accuracy	±0.5% of indicated test value from 10%–100% or rated capacity	±0.5% of indicated test value from 10%–100% or rated capacity
Units Of Measure	N•m, kg-cm, ft-lb, in-lb, in-oz	N•m, kg-cm, ft-lb, in-lb, in-oz
Operating Modes	TRACK, PEAK, FIRST PEAK	TRACK, PEAK, FIRST PEAK
Operating Temperature	10 °–32 °C (50 °–°90 °F)	10°–32 °C (50°–90 °F)
Storage Temperature	-20 °–50 °C (-2 °–°122 °F)	-20°–50 °C (-2°–122 °F)
Humidity	85% Relative Humidity @ 21 °C (70 °F)	85% Relative Humidity @ 21 °C (70 °F)
Power Supply	Included 9V AC/DC adaptor, 6 AA batteries included	Included 9V AC/DC adaptor, 6 AA batteries included
Data/Surge/Recall	Memory Capacity – 500 records (complete check mode only)	Memory Capacity – 500 records (complete check mode only)

QC1ETT50

Electronic Torque Tester™

Designed to be a sturdy, low cost tester, these electronic torque testers can be placed on the wall in the factory or on a bench to allow operators to test torque wrenches or power tools without having to leave their station.

- Track and peak modes
- Can be used with non-impacting power tools (joint rate simulators required)
- Dual scale (English/N•m or English/dN•m)
- Reads bidirectional (clockwise and counterclockwise)
- Uses rechargeable Ni-Cad batteries (2 Ni-Cad 9V). Charger included

Stock No.	Square Drive, inches	Range English	Range, N•m
QC1ETT10	1/4	10–100 in-oz	7.0–70.6 cN•m
QC1ETT400	1/4	40–400 in-oz	28–280 cN•m
QC1ETT50	1/4	5–50 in-lb	5.6–56 dN•m
QC1ETT100	1/4	10–100 in-lb	11.3–113 dN•m
QC2ETT250	3/8	25–250 in-lb	28–280 dN•m
QC2ETT1000	3/8	100–1,000 in-lb	113–1,130 dN•m
QC3ETT250	1/2	25–250 ft-lb	34–339 N•m
QC4ETT600	3/4	60–600 ft-lb	81–813 N•m

The certification of accuracy provided per *ASME* and ISO® Standards is 10%–100% of full scale.

All *Snap-on* torque wrenches, drivers and testers are provided with a Certificate of Calibration (unless otherwise indicated). All wrenches and drivers are calibrated per ASME® and ISO® standards for accuracy, from 20–100% of full scale, using NIST® traceable equipment.

VERSATORQ® TORQUE METERING/DATA ACQUISITION SYSTEM

The *Versatorq* system can be used for any job requiring repetitive torque applications or regular inspection of fastener torque. This system can also be used to verify pneumatic and mechanical torque wrench accuracy. Peak torque can be captured by using a rotary sensor with a non-impact power tool operating at less than 1,000 rpm and being driven into a soft joint. Inspectors can check critical fastener torque and record data for quality audits. Perfect for process quality control. The *Versatorq* system can internally perform statistical analysis, including histograms, and print to a serial printer.

- **Versatile** – Battery operated and lightweight, with available ranges from 2–20 in-oz to 150–1,500 ft-lb and seven units of measure: in-oz, in-lb, ft-lb, N•m, d•Nm, kg-m, and kg-cm. The *Versatorq* system can be used with sockets, extensions, universal joints, ratcheting drivers or any of these combined
- **Data Aquisition** – Store and recall up to 3,500 readings. An internal memory backup battery retains setup and last memory data for up to 10 years
- **Track or Peak Mode** – Track mode displays applied torque value and peak mode displays highest torque value
- **Easily Calibrated** – Customer calibration supports ISO® 9000. Instructions for step-by-step calibration provided in the user's manual
- **Smart Sensors** – Built-in EEPROM memory chip stores sensor identification and calibration factors. Factory calibrated, a sensor retains its accuracy with all *Versatorq* meters; just plug in the desired sensor. Periodic recalibration is necessary
- **120VAC/220VAC, 60 Hz Adaptor** – Rechargeable battery and belt clip allow you to take it to the task or use it at the bench with the optional table stand and AC adaptor
- **PC Statistical Analysis Output** – Download histogram, minimum and maximum reading, mean, sigma N, sigma, Cp, Cpk, % error and number of readings under and over tolerance
- **Serial Port Interface with Computer or Printer** – True RS-232 communications port for downloading to computer or serial printer or configurable to MITUTOYO statistical printer protocol
- **Visual and Audio Cues** – Analog bar graph at top of display provides a live indication of applied torque. An OVER warning flag comes on to indicate that maximum sensor range has been exceeded. Green MIN LED indicates lower tolerance has been achieved, and Red MAX LED indicates upper tolerance has been exceeded. Audio alarm produces a distinctive 2 kHz tone. Includes an audio output jack for optional headphones in a noisy environment

Versatorq1® System Specifications

Specification	Description
VERSATORQ1	120V AC Charger and Carrying Case. Basic Torque Acquisition Meter
Display	4-digit with alpha and numeric function flags
Display Capacity*	± 4 digits, 8,000 counts
Accuracy	±1% of Reading (10%–100% of Sensor Range) (± 2% with VERSA1S10 and VERSA1S20 Sensors)
Push-Button Keypad	Min/max alarm, zero tare, setup, units, store/recall/clear, send, statistics, enter
Units Of Measure	in-oz, in-lb, ft-lb, N•m, dN•m, kg-m, kg-cm
Operating Temperature	5°–42°C (40°–110°F)
Storage Temperature	-10°–50°C (-2°–12°F)
Humidity	Up to 90%, non-condensing
Dimensions	3" W, 2.5" H (" with belt clip), 6" D
Weight	1 lb
Charge Life (full charge to shutoff)	20 hours continuous
Battery Charger	120V AC or 220V AC, 50–60 Hz
Data Storage/Recall	3,500 measurements
Battery Charger Output	9V DC, 200mA
Serial Output Port – *VERSATORQ1*	RS-232 (True), 300-19.2K baud, and Mitutoyo (statistical protocol)
Statistical Analysis – *VERSATORQ1*	MAX, MIN, Sigma, Cp, Cpk, % Error, -NoGo, +NoGo
Histogram – *VERSATORQ1*	Lower set limit, upper set limit, 10 divisions

**Versatorq* display ignores torque input less than .5% of full scale in track mode and 2.0% of full scale in peak mode.

Please reference the *Versatorq* instruction manual for the sensor ranges and resolutions in different units of torque measurement.

VERSATORQ1

Versatorq1

Torque Acquisition Meter
Includes VERSACHARGE1 charger and PB57A case.

Sensors sold separately.

VERSA2S100

Versatorq Sensors

Stock No.	Square Drive, inches	Range	Sensor Diameter, inches	Sensor Length, inches	Cable Length, inches
VERSA1S20*	1/4	2–20 in-oz	.5	2.9	48
VERSA1S10*	1/4	1–10 in-lb	.7	2.9	48
VERSA1S50	1/4	5–50 in-lb	.9	2.1	48
VERSA1S200	1/4	20–200 in-lb	.9	2.1	48
VERSA2S100	3/8	10–100 ft-lb	1.2	2.4	48
VERSA3S250	1/2	25–250 ft-lb	1.4	2.6	48
VERSA4S600	3/4	60–600 ft-lb	2.0	3.9	96
VERSA5S1500**	1	150–1,500 ft-lb	2.4**	4.4	92***

*Knurled handles allow for fingertip control.
**Diameter does not include side mounted connector.
***Heavy duty coiled cord with four-pin MS style connector.

Versatorq System Accessories

Stock No.	Description
VERSACHARGE1	Power Pack, 120VAC to 9VDC
VERSACABLE2	PC Interface Cable
PB57A	Carrying Case

⚠WARNING

- Do not exceed rated torque
- Do not use to break fasteners loose
- Periodic recalibration is necessary to maintain accuracy
- Read safety precautions on pages W1 to W4

VERSATEST™ ELECTRONIC TORQUE TESTER & CALIBRATOR

VERSATEST600

The *Versatest* Indicator is a laboratory grade instrument used for precise, in-house torque wrench testing and calibration. High precision torque transducers provide system readings with an accuracy of ± 0.25% of indicated value. Transducers are available in ranges from 15–200 in-oz to 200–2,000 ft-lb and feature a special built-in memory chip that identifies the range and maintains the calibration between all *Versatest* Indicators. Setup and calibration programming is entered via front panel membrane keys. The *Versatest* can store and recall up to 3,000 different torque/force readings. Statistical analysis stored in memory can be downloaded to a computer or serial printer. A hard wired lithium battery keeps the internal memory and the date/time clock operating for up to ten years.

Features:

- Automatic downloading
- RS232C serial port – use with printer or PC
- Data storage/recall (with date/time stamp) holds up to 3,000 measurements
- Real-time clock
- Smart transducers
- Analog output: connect to oscilloscope or X-Y plotter
- External printer can be mounted on top of the *Versatest* unit
- Remote foot switch interface for send/print functions
- Four modes: TRACK, PEAK HOLD, FIRST PEAK, POWER TOOL
- Statistic Process Control (SPC) built in

Versatest Specifications

Specifications	*VERSATEST*
Display	Large 5.5" x 1.5" backlighted LCD graphics display (240 x 64 dot matrix, 0.67" torque digits character height)
Capacity	5 significant digits +/- 32,000 counts (16 bit A/D)
Sample Rate	2,000 samples per second
Display Rate	5 updates per second
Accuracy	± 0.25% of reading AT 25 °C (with TTC Transducer calibration)
Temperature Drift	+ 0.03% / °C (+0.017% / °F)
Bar Graph	100 segment analog of applied torque scaled to Limits Set value
Units Of Measure	in-oz, in-lb, ft-lb, N•m, dN•m, kg-cm and kg-m
Modes	Track, peak hold, first peak, power tool
Soft Key User Interface	Units, Calibration, Date/Time, Statistics, Hi/Low Limits Set, Data Store, Data Recall, Printer Setup, Zero, Auto/Manual Store/Send/Clear
Select Keys	Increment, Decrement, Shift Left, Shift Right, Enter
Operating Temperature	10 °–32 °C (50 °–90 °F)
Storage Temperature	-20 °–50 °C (-2 °–122 °F)
Humidity	85% Relative Humidity @ 21 °C (70 °F)
Dimensions	10" wide x 4" high x 10.5" deep (including carry handle)
Power Supply	Auto Switching 100VAC-24-VAC, 50/60 Hz, 50 watts
Data Storage/Recall	3,000 Measurements
Statistical Analysis	Max, Min, Range, Mean, Sigma N, Sigma, Cp, Cpk, % Error, -NoGo, +NoGo
Histogram	Lower Set Limit, Upper Set Limit, 10 Divisions
Printer/Computer Serial Output Port	RS232 (True), 300-19.2K Baud
Computer Serial Com Port	RS232 (True), 300-19.2K Baud
Analog Output	+(CW)/-(CCW) 1.8V at Transducer Full Range Linearity, ±1% of reading
Loader Control Relays	Two, Normally Open, Form A, Rated 12V DC @ 1/2A close contact at 110% CW or CCW or torque/force transducer range

Refer to Transducer Chart on p.298 for additional information.

VERSATEST600 Electronic Torque Metering System
Provides high speed monitoring of static and dynamic torque inputs. Includes the VERSATEST600 Electronic Torque Calibration System indicator, VERSA600LDR2 loader, TTC12 transducer, TTC400 four-in-one transducer and TTC5000-1 four-in-one adaptor plate.

ELECTRONIC TORQUE TESTER AND CALIBRATOR

- Automatic sensor recognition with TTC series "Smart" transducers
- Range: 15 in-oz to 2,000 ft-lb (bidirectional)
- Total uncertainty (10%–100% of range): ± 0.25% of indicated torque value
- Alpha numeric eight-digit display
- Memory to 3,000 values
- Includes low-profile serial printer
- Date and time stamp for stored values
- Statistical analysis performed on stored data
- Programmable manual or automatic options for clear, store and print functions
- Recall and review of stored torque values
- Modes: track, peak, first peak and power tool
- Optional angle encoder
- RS232C port is standard
- Analog output is standard
- Full digital circuitry
- Eight torque measurement units: in-oz, in-lb, ft-lb, cN•m, dN•m, N•m, kg-cm and kg-m
- Automatic lockup for transducer protection
- Automatic zero
- Automatic transducer recognition
- Operates on 120V AC or 240V AC

TTCELCON

TTC2000SYS

TTC2000SYS/TTC2800SYS System Specifications

TTC2000SYS Manual Loader System	**Torque/Force Display**	Eight-digit, alpha-numeric, super bright red LED, 0.55" character height
	Capacity	8 digits ± 32,000 counts (16 bit A/D)
	Accuracy*	± 0.25% of reading at 25 °C (with TTC Transducer calibration)
	Temperature Drift	+ 0.03% / ºC (+ 0.017% / ºF)
	Units Of Measure	Torque: ft-lb, in-lb, in-oz, N•m, dN•m, kg-cm and kg-cm; Force: lbf, ozf, N, dN, kp and gf
	Maximum Range Display	2-line x 16 character 5 x 8 dot-matrix LCD used for MAX. Transducer range, Units, Angle, Calibration, Date/Time, Statistics, Torque/Force or Torque/Angle Limits Set, Data Store/Recall, Printer Setup
	Modes	Track, Peak Hold, Angle, First Peak, Power Tool
	Operating Temperature	10 °–32 °C (50 °–90 °F)
	Storage Temperature	-20 °–50 °C (-2 °–122 °F)
	Humidity	Up to 90%, Non-condensing
	Power Supply	UL® Approved, 120V AC/220VAC, 50/60 Hz
	Data Storage/Recall	3,000 Measurements
	Statistical Analysis	Max, Min, Range, Mean, SigmaN, Sigma, Cp, Cpk, % Error, -NoGo, +NoGo
	Histogram	Lower Set Limit, Upper Set Limit, 10 Divisions
	Printer/Computer Serial Output Port	RS232 (True), 300-19.2K Baud
	Computer Serial Com Port	RS232 (True), 300-19.2K Baud (Optional)
	Analog Output	+(CW)/-(CW) 1.8V at Transducer Full Range Linearity, ±1% of reading
	Loader Control Relays	Two, Normally Open, Form A, Rated 12DVC @ 1/2A close contact at 110% CW or CCW or torque/force transducer range
	Loader Hand Crank	Input torque 8 ft-lb Maximum, Output Torque 2,000 ft-lb Maximum
	Motorized Loader Modes	TTC2000SYS is 110/220 manual switch. TTCC2800SYS is 110V only.
	Motorized Loader Power Supply	120V AC +/- 10% Hz @ 3.14A (including motor current); (optional step-down transformer for 240V AC operation)
TTC2800SYS Motorized Control System	**Motorized Loader Modes**	Manual; Auto Dial; Auto 1st Peak
	Motorized Loader Power Supply	120V AC ± 10% Hz @ 3.14A (including motor current); (optional step-down transformer for 240V AC operation)

System Components

TTC2000SYS Electronic Manual Torque Tester/Calibrator
TTC2000SYS includes TTC2000 Monitor, Mechanical Loader and Cabinet, TTC400 four-in-one Transducer Kit (4 in-lb–250 ft-lb), TTC12 Transducer Kit (60–600 ft-lb), TTC14 Transducer Kit (200–2000 ft-lb), TTC5500-1 Extension Arm, TTC5000-1 four-in-one Transducer Bracket, 2000-SW WedgeLink Software and TTC501 Download Cable.

TTC2800SYS Electronic Motorized Torque Tester/ Calibrator
Model TTC2800SYS includes TTC2800 TTC Monitor, Motorized Loader, and Cabinet, TTC400 four-in-one Transducer Kit (4 in-lb–250 ft lb), TTC5000-1 four-in-one Transducer Bracket, TTC12 Transducer Kit (60–600 ft-lb), TTC14 Transducer Kit (200–2,000 ft-lb), TTC5500-1 Extension Arm, 2000-SW WedgeLink Software, andTTC501 Download Cable.

All Snap-on® torque wrenches, drivers and testers are provided with a Certificate of Calibration (unless otherwise indicated). All wrenches and drivers are calibrated per ASME® and ISO® standards for accuracy, from 20%–100% of full scale, using NIST® traceable equipment.

⚠WARNING

- Do not exceed rated torque
- Periodic recalibration checks are necessary to maintain and assure torque tester accuracy
- Read safety precautions on pages W1 to W4

ELECTRONIC TORQUE TESTER AND CALIBRATOR

TTC8

TTC400

Transducers

• All TTC series transducers include the correct adaptor for the indicated torque range

Stock No.	Description	Sq. Drive Size	Range	Bench Top Mounting Bracket
TTC4	Transducer	1/4	5–50 in-oz	TTC3421
TTC5	Transducer	1/4	15–200 in-oz	TTC3421
TTC6	Transducer	1/4	4–50 in-lb	TTC3421
TTC65	Transducer	1/4	15–150 in-lb	TTC3421
TTC7	Transducer	3/8	30–400 in-lb	TTC3421
TTC8	Transducer	3/8	80–1,000 in-lb	TTC3421
TTC10	Transducer	1/2	10–25 ft-lb	TTC3422
TTC11	Transducer	1/2	20–250 ft-lb	TTC3422
TTC12	Transducer	3/4	60–600 ft-lb	TTC3422
TTC13	Transducer	1	100–1,000 ft-lb	TTC15002
TTC14	Transducer	1	200–2,000 ft-lb	TTC15002
TTC400*	4-in-1 Transducer	1/4 3/8 3/8 1/2	4–50 in-lb 30–400 in-lb 80–1,000 in-lb 20/250 ft-lb	– – – –
TTC5000-1**	4-in-1 Adaptor Plate	—	—	–

*TTC400 requires the TTC5000-1 adaptor plate when used with the TTC600 manual loader, TTC800 motorized loader and VERSA600LDR
**Required for TTC400 4-in-1 torque transducer to be used on TTC600/TTC800 loaders

TTC2600

TTC2610

TTC2620



TTC26302

Force Testing Equipment

- Reaction arms, cables, mounting plates and fixtures are available for testing tensiometers plus compression and tension gauges
- The TTC600 and TTC800 loaders and TTC series transducers can be configured to deliver compression and tension loads
- The TTC610/TTC810 indicator also provides measurement, display, storage and statistical analysis for FORCE inputs

Stock No.	Description
TTC2600	Tensiometer Testing Kit
TTC2610	Tension Gauge Testing Kit
TTC2620	Compression Gauge Testing Kit
TTC26302	Force Arm Kit (Only one is needed for any Force Testing Kit)

TTCCALKIT Calibration Kit

- Includes TTC3200 Weight Set (#1), TTC500 2 1/2" Calibration Wheel, TTC1510 5" Calibration Wheel, TTC1520 10" Butterfly Calibration Wheel, 2000-226-3 Adaptor (1/2" x 3/8"), TTC1540 40" Calibration Arm, 390-2-2 4 oz Calibration Weight Tray, TTC301 8 oz Calibration Weight Tray, TTC3040 7.5 lb Calibration Weight Tray, TTC3020 15 lb Calibration Weight Tray, TTC3030 50 lb Calibration Weight Tray and TTC25002 Calibration Stand Kit
- Kit can be used on all TTC Systems

Calibration Wheels/Arms

- Use to calibrate any TTC series transducer. Arms are certified to manufacturer's standards

Stock No.	Description
TTC500	2.5" Calibration Wheel, 1/4" sq. dr.
TTC1510	5" Calibration Wheel, 1/4" sq. dr.
TTC1520	10" Calibration Butterfly, 1/2" sq. dr. (adaptor is optional)
TTC1540	40" Calibration Arm, 1 1/4" sq. dr.

Weight Sets

- Use to calibrate any TTC series transducer. All weights are NIST® (NBS) traceable.

Stock No.	Description
TTC3200	Weight Set #1 (Use for all TTC Series Transducers)
TTC3210	Weight Set #2 (For 200 in-oz to 250 ft-lb TTC Series Transducers)
TTC3220	Weight Set #3 (For 600 ft-lb to 2,000 ft-lb TTC Series Transducers)

Weight Hangers/Trays

- Use to calibrate any TTC series transducer. Weight trays certified as to weight

Stock No.	Description
TTC301	Weight Hanger, 8 oz
TTC3040	Weight Tray, 7.5 lb
TTC3020	Weight Tray, 15 lb
TTC3030	Weight Tray, 50 lb

Joint Rate Simulator Adaptors

- Use with torque tester when testing non-impacting power tools
- Square drive adaptor is placed on top of square drive of the torque tester and tightened with a set screw
- Adaptor bit is inserted into the power tool and mated to the top of the joint adaptor
- By stacking the belleville washers in set patterns, the joint rate adaptor can simulate soft, medium or hard joints

Stock No.	Square Drive, inches	Capacity, in-lb	Adaptor Bit	Load Screw
QC1JRS50	1/4	50	1/4" Hex x 3/16" Hex	1/4" x 28 x 1
QC2JRS400	3/8	400	3/8" Square Internal x 3/8" Hex	7/16" x 20 x 1.5
QC2JRS1000	3/8	1,000	3/8" Square Internal x 1/2" Hex	5/8" x 18 x 1.5

QC2JRS400

⚠WARNING

- Do not exceed rated torque
- Periodic recalibration checks are necessary to maintain and assure torque tester accuracy
- Read safety precautions on pages W1 to W4

TORQUE COMPARATORS

TTC25002

Accessories

Stock No.	Description
TTC3421	Mounting Bracket A
TTC3422	Mounting Bracket B
CDI200015003	Mounting Bracket C
TTC501	Cable, PC
TTC75006	Kit, Torque Screwdriver Testing
260-27	1/4" hex x 1/4" square Female to Female Adaptor
342-40	1/4" square x 1/4" square Female to Female Adaptor
342-41-1S	1/4" square x 3/8" square Female to Female Adaptor
342-41-2	3/8" square x 3/8" square Female to Female Adaptor
65-26-2	1/2" square x 3/8" square Female to Female Adaptor
65-26-3S	1/2" square x 1/2" square Female to Female Adaptor
65-78-1	1/2" square x 3/4" square Female to Female Adaptor
65-78-2	3/4" square x 3/4" square Female to Female Adaptor
75-25-1	1" square x 3/4" square Female to Female Adaptor
75-20	1" square x 1" square Female to Female Adaptor
2000-152-3	1/2" x 3/8" Square Drive Reducer
2000-226-3	3/4" x 1/2" Square Drive Reducer
2000-226-2	1" x 3/4" Square Drive Reducer
2000-0154-18	1 1/4" x 3/4" Square Drive Reducer
TTC501	Connects TTC610 Digital Indicator to PC
TTC25002	Free standing calibration stand with mounting block and hardware for use with TTC2000/TTC2800 Systems and all TTC Series Transducers
TTC75002	Torque Screwdriver Testing Kit
TTC5500-1	Extension Arm (required for wrenches longer than 45")

TCR175

TCR600

QCDTC3250

Torque Comparators

TCR175 Torque Comparator
- Determine if a torque wrench requires calibration to maintain proper application of torque
- 1/2" female square drive input and 175 ft-lb capacity with 5 ft-lb graduations and 230 N•m capacity with 10 N•m increments is a perfect fit for the most popular torque wrenches
- Integrated exercise adaptor makes it easy to break in simple, providing the most accurate results (as per B107-300 standard)
- 2% accurate within ± 2% of the reading from 20% of full scale to full scale clockwise and counterclockwise
- Can check a 3/8" drive torque wrench by using an A2A or GAF2A adaptor

TCR600 Torque Comparator

Similar to TCR175 except for these differences:
- 3/4" female square drive input and 600 ft-lb capacity with 10 ft-lb graduations and 800 N•m capacity with 20 N•m increments
- Compact design with 1/4" steel mounting plate allows for convenient installation in any direction: horizontally on a bench, vertically on a wall, or on any other sturdy, flat surface
- Use on most 3/4" drive torque wrenches including these popular Snap-on® models: ATECH4R600, TECH4R600/TECH4RM600, QD4400/QD4R400, QD4600/QD4R600, TQR400E/TQR600E, TE352A/TE602A series and TEC352A/TEC602A series
- Does not include certificate of calibration

QCDTC3250 Electronic Torque Comparator
- Fast, highly accurate method to check the accuracy of mechanical and electronic 3/8" and 1/2" drive torque wrenches
- Large easy-to-read LCD Display with backlight
- Three measurement units [ft-lb, in-lb, N•m]
- Highly accurate; +/- 1% CW & +/- 1% CCW, 10%–100% of full scale
- Tough composite housing with integrated adaptor storage
- Three primary torque check functions: including Track, Peak Hold, First Peak
- Adjustable auto shutoff feature
- Integrated exercise adaptor on mounting plate (allows user to break-in for accurate results per B107-300 standard)
- Use (three) “AA” alkaline batteries (Optional AC adaptor DTS8269)
- Includes 3/8" adaptor (GAF2A)
- CE Approved

Specifications:
- Accuracy: +/- 1% CW & +/- 1% CCW, 10%–100% of full scale) @ 72 °F (22 °C)
- Size: ½" Female Square Drive (and 3/8" Drive with included GAF2A adaptor)
- Range: 25 ft-lb to 250 ft-lb (34–339 Nm)
- Dimensions: 13.2" L, 4.75" W, 2.2" D
- Weight: 4.9 lb (2.22 kg)
- Operating/Storage Temperature: 0 °F – 130 °F
- Measurement Drift: Torque +0.01% of reading per °C
- Humidity: Up to 90% non-condensing
- LCD: Dot matrix (192 x 65 resolution); 3.3"L x 1.25"H viewing area

Pneumatic Torque Wrenches

- Control torque to ± 5% accuracy by controlling input air pressure
- Dual-speed gearbox
- High-speed rundown gear up to greater than 100 rpm for fast rundown of nuts along the stud
- Low-speed torque gear: much slower rpm ensures controlled and accurate torque
- Safety paddle requires two-handed operation of the wrench to keep both hands away from pinch points near the reaction arm
- Low vibration eliminates injury caused by repetitive use of impacting wrenches
- Continuous drive exhibits lower decibels than competitors pneumatic torque wrenches or impact wrenches
- Ideal for oil fields, construction, ship yards, power generation, railroads, maintenance, mining equipment maintenance and more
- Use with Snap-on® filter regulator PTQFRL

Stock No.	Drive Size, inches	Torque Range, ft-lb (N•m)
PTQ0.5	3/4	195–500 (264–678)
PTQ1	3/4	320–1,285 (434–1,742)
PTQ3	1	915–3,305 (1,240–4,481)
PTQ8	1 1/2	1,300–8,500 (1,763–11,524)

Pneumatic Reaction Arm Kits

- Variety of reaction arms for any application

Pneumatic Torque Wrench Stock No.	Reaction Arm Stock No.	Reaction Arm Description	Reaction Arm Length, inches	Reaction Arm Offset, inches
PTQ0.5 PTQ1	PTQ1-03S	Short Arm Included with Wrenches	4.48	2.40
	PTQ1-03R	Rotatable Arm	6.27	2.13
	PTQ1-ALC7	ALCO Arm	7.00	No Offset
	PTQ1-03L	Long Arm	6.02	2.44
	PTQ1CN612812	Twin Tool Arm	6.75–8.75 Adj.	No Offset
	PTQ1-EXTRF12	12" Wheel Gun Extension and Reaction Fixture	2.41–4.59 Adj. 12.68*	No Offset
PTQ3	PTQ3-03S	Short Arm Included with Wrench	3.3	5.26
	PTQ3-03R	Rotatable Arm	8.2	3.05
	PTQ3-ALC9	ALCO Arm	9.00	No Offset
	PTQ3-03L	Long Arm	7.65	3.3
	PTQ3-CN65825	Twin Tool Arm	6.5–8.25 Adj.	3.25
PTQ8	PTQ8-03	Short Arm Included with Wrench	10.68	4.55
	PTQ8-03R	Rotatable Arm	10.8	4.1
	PTQ8-ALC11	ALCO Arm	11.00	No Offset
	PTQ8-FROG	Frog Nut Tool	8.23	—

*Tool length

PTQFRL Filter/Regulator Unit

- Combination Filter-Regulator-Lubrication (FRL) unit gives you complete control over your pneumatic supply
- Unit includes the hoses, lubrication, couplings and gauges necessary to operate the torque wrench for safe, long-lasting performance

PTQFRL

⚠WARNING

- Do not exceed rated capacity
- Periodic calibration checks are necessary to maintain and assure torque tester accuracy
- Read safety precautions on pages W1 to W4

A POWERFUL SPIN ON SUPERIOR PERFORMANCE.

Comfort, power and versatility are built into each Snap-on® Instinct screwdriver. Even the most basic tools should still be the best. And our selection is superior as well: with lengths, thicknesses, tip types, finishes and handle sizes and styles to meet any job.

Multi-faceted Design — Unique handle geometry provides excellent gripping surface and superior turning force.

Inner Core — Maximizes torque between the handle and the blade.

Middle Layer — Tough, brightly-colored material provides impact and solvent resistance.

Outer Layer — Textured material gives you grip, comfort and torque – even in the greasiest shop environments.

Hard or Soft Grip Handle Design — Choose from an ultra-comfortable soft grip or a grease-resistant hard grip.

Shanks — Round shanks are made from special alloy steel with few impurities for strength and lasting durability.

Seven Tip Types — *Snap-on* screwdrivers are available in seven different tip profiles to handle a wide variety of fastener types.

FORMED FOR BETTER FUNCTION.

Built with exclusive features that provide superior durability and performance, it only takes one turn to know it's a *Snap-on* screwdriver.

Standard Flat Tip/Phillips® Combination Screwdriver Sets

		Set Contains:	SGDX80BR	SGDX80BO	SGDX80BG	SGDX60BR	SGDX60BO	SGDX60BG
	Stock No.	Handle	Red	Orange	Green	Red	Orange	Green
Flat Tip Standard	SHD1*	Hard	•	•	•			
	SGD2B	Soft	•	•	•	•	•	•
	SGD4B	Soft	•	•	•	•	•	•
	SGD6B	Soft	•	•	•	•	•	•
	SGD8B	Soft	•	•	•			
Phillips Standard	SHDP22IR*	Hard	•	•	•			
	SGDP31IRB	Soft	•	•	•	•	•	•
	SGDP42IRB	Soft	•	•	•	•	•	•
	SGDP63IRB	Soft				•	•	•

*Does not include hex bolster.

Soft Grip Handle Colors

Red	Orange	Green
R	O	G

ADD SUFFIX TO STOCK NUMBER FOR SPECIAL COLORS

SGDX80BR

SGDX60BO

Cabinet, Mini Tip, Extra Long Flat Tip/*Phillips* Screwdriver Sets

		Set Contains:	SGDXL80BR	SGDXL80BO	SGDXL80BG	SGDX40BR	SGDX40BO	SGDX40BG	SGDXXL20BR	SGDXXL20BO	SGDXXL20BG
	Stock No.		Red	Orange	Green	Red	Orange	Green	Red	Orange	Green
Flat Tip Cabinet	SGD146B		•	•	•						
	SGD480B		•	•	•						
	SGD4120B		•	•	•						
	SGD4160B		•	•	•						
Phillips Cabinet	SGDP61B		•	•	•						
	SGDP82B		•	•	•						
	SGDP122B		•	•	•						
	SGDP162B		•	•	•						
Flat Tip Mini-Tip	SGD304B					•	•	•			
	SGD306B					•	•	•			
Phillips Mini-Tip	SGDP300B					•	•	•			
	SGDP301B					•	•	•			
Extra Long	SGD424B								•	•	•
	SGDP242B								•	•	•

Soft Grip Handle Colors

Red	Orange	Green
R	O	G

ADD SUFFIX TO STOCK NUMBER FOR SPECIAL COLORS

SGDXL80BR

SGDX40BG

SGDXXL20BO

WARNING

- Do not use screwdrivers as pry bars, chisels or punches
- Read safety precautions on pages W1 to W4

HARD GRIP HANDLE COMBINATION SETS INSTINCT®

SHDX80R

SHDX60O

GSHDX80R

SHDXL80O

SHDX40G

Standard Length Flat Tip/Phillips® Combination Screwdriver Sets

Set Contains:		SHDX80R	SHDX80O	SHDX80G	SHDX60R	SHDX60O	SHDX60G
	Stock No.	Red	Orange	Green	Red	Orange	Green
Flat Tip Standard	SHD1*	•	•	•			
	SHD2	•	•	•	•	•	•
	SHD4	•	•	•	•	•	•
	SHD6	•	•	•	•	•	•
	SHD8	•	•	•			
Phillips Standard	SHDP22IR*	•	•	•			
	SHDP31IR	•	•	•	•	•	•
	SHDP42IR	•	•	•	•	•	•
	SHDP63IR				•	•	•

*Does not include hex bolster.

Hard Grip Handle Colors

Red	Orange	Green
R	O	G

ADD SUFFIX TO STOCK NUMBER FOR SPECIAL COLORS

Industrial Finish Shank, Cabinet and Mini Tip Flat Tip/*Phillips* Screwdriver Sets

Set Contains:		GSHDX80R	SHDXL80O	SHDX40R	SHDX40O	SHDX40G
	Stock No.	Red	Orange	Red	Orange	Green
Flat Tip Industrial Finish Shank	GSHD1*	•				
	GSHD2	•				
	GSHD4	•				
	GSHD6	•				
	GSHD8	•				
Phillips Tip Industrial Finish Shank	GSHDP22IR*	•				
	GSHDP31	•				
	GSHDP42	•				
Flat Tip Cabinet	SHD146		•			
	SHD480		•			
	SHD4120		•			
	SHD4160		•			
Phillips Tip Cabinet	SHDP61		•			
	SHDP82		•			
	SHDP122		•			
	SHDP162		•			
Flat Tip Mini Tip	SHD304			•	•	•
	SHD306			•	•	•
Phillips Tip Mini Tip	SHDP300			•	•	•
	SHDP301			•	•	•

*Does not include hex bolster.

Hard Grip Handle Colors

Red	Orange	Green
R	O	G

ADD SUFFIX TO STOCK NUMBER FOR SPECIAL COLORS



SGD2BR

— Standard

Red	Orange	Green	A	B	C	D
SGD2BR	SGD2BO	SGD2BG	.035	7/32	2 13/16	6 15/16
SGD4BR	SGD4BO	SGD4BG	.040	1/4	3 15/16	8 27/32
SGD6BR	SGD6BO	SGD6BG	.050	5/16	5 15/16	10 27/32
SGD8BR	SGD8BO	SGD8BG	.055	3/8	7 29/32	13 13/32
SGD10BR	SGD10BO	SGD10BG	.055	3/8	10	15 7/16

SGDS50BR Flat Tip Screwdriver Set
Includes SGD2BR, SGD4BR and SGD6BR Flat Tip Screwdrivers plus SGD304BR and SGD306BR Miniature Flat Tip Screwdrivers (5-piece)

SGDS50BG Flat Tip Screwdriver Set
Includes SGD2BG, SGD4BG and SGD6BG Flat Tip Screwdrivers plus SGD304BG and SGD306BG Miniature Flat Tip Screwdrivers (five-piece)

SGDS50BO Flat Tip Screwdriver Set
Includes SGD2BO, SGD4BO and SGD6BO Flat Tip Screwdrivers plus SGD304BO and SGD306BO Miniature Flat Tip Screwdrivers (five-piece)

SGD306BR

— Mini Tip

Red	Orange	Green	A	B	C	D
SGD304BR	SGD304BO	SGD304BG	.020	1/8	3	5 7/8
SGD306BR	SGD306BO	SGD306BG	.030	3/16	3	5 7/8

SGD480BR

— Cabinet

Red	Orange	Green	A	B	C	D
SGD146BR	SGD146BO	SGD146BG	.030	3/16	5 13/16	10 1/8
SGD1410BR	SGD1410BO	SGD1410BG	.032	3/16	10	14 5/32
SGD1416BR	SGD1416BO	SGD1416BG	.032	3/16	16	20 5/32
SGD480BR	SGD480BO	SGD480BG	.032	1/4	7 15/16	12 3/4
SGD4100BR	SGD4100BO	SGD4100BG	.032	1/4	9 15/16	14 3/4
SGD4120BR	SGD4120BO	SGD4120BG	.032	1/4	11 15/16	16 3/4
SGD4160BR	SGD4160BO	SGD4160BG	.032	1/4	15 15/16	20 3/4

SGDS50BR

SGD424BR

— Extra Long

Red	Orange	Green	A	B	C	D
SGD424BR	SGD424BO	SGD424BG	.046	5/16	24	28 3/4



SHD6R

— Standard

Red	Orange	Green	A	B	C	D
SHD1R*	SHD1O*	SHD1G*	.040	1/4	1 7/8	3 3/4
SHD2R	SHD2O	SHD2G	.035	7/32	2 13/16	6 15/16
SHD4R	SHD4O	SHD4G	.040	1/4	3 15/16	8 27/32
SHD6R	SHD6O	SHD6G	.050	5/16	5 15/16	10 27/32
SHD8R	SHD8O	SHD8G	.055	3/8	7 29/32	13 13/32
SHD10R	SHD10O	SHD10G	.055	3/8	10	15 7/16

*Does not include hex bolster.

SHD304R

Mini Tip

Red	Orange	Green	A	B	C	D
SHD304R	SHD304O	SHD304G	.018	1/8	3	5 7/8
SHD306R	SHD306O	SHD306G	.030	3/16	3	5 7/8

GSHD4R

— Industrial Finish Shank

Industrial/Red	A	B	C	D
GSHD1R*	.037	1/4	1 1/2	3 3/4
GSHD2R	.032	7/32	2 7/8	7
GSHD4R	.037	1/4	4	8 7/8
GSHD6R	.046	5/16	6	10 27/32
GSHD8R	.050	3/8	8	13 13/32

*Does not include hex bolster.

SHD4160O

Cabinet

Orange	A	B	C	D
SHD146O	.030	3/16	6	10 1/8
SHD480O	.032	1/4	8	12 3/4
SHD4120O	.032	1/4	12	16 3/4
SHD4160O	.032	1/4	16	20 3/4

⚠WARNING

- Do not use screwdrivers as pry bars, chisels or punches
- Read safety precautions on pages W1 to W4

FLAT TIP/POCKET AND SPARK TEST

SDD204O

Pocket

Stock No.	Type	Description	A	D
SDD204O	Pocket	Screwdriver with Pocket Clip	.025	4 3/4
SDD224O*	Pocket	Distributor Screwdriver*	.025	4 3/4

*Magnet on handle

SDD214

Spark Test

Stock No.	Type	Description	A	D
SDD214	Spark Test	Screwdriver with Pocket Clip	.025 x 1/8	5 1/8

SOFT HANDLE PHILLIPS® INSTINCT®

SGDP42IRBR

Standard

Red	Orange	Green	A	B	C	D
SGDP31IRBR	SGDP31IRBO	SGDP31IRBG	#1	3/16	2 31/32	7 1/8
SGDP42IRBR	SGDP42IRBO	SGDP42IRBG	#2	1/4	3 31/32	8 7/8
SGDP62IRBR	SGDP62IRBO	SGDP62IRBG	#2	1/4	6	10 7/8
SGDP63IRBR	SGDP63IRBO	SGDP63IRBG	#3	5/16	5 29/32	10 13/16
SGDP64IRBR	SGDP64IRBO	SGDP64IRBG	#4	3/8	6	11 1/2
SGDP84BR	SGDP84BO	SGDP84BG	#4	3/8	8	15 5/8

SGDP50BR *Phillips* Tip Screwdriver Set
Includes SGDP31IRBR, SGDP42IRBR and SGDP63IRBR *Phillips* Tip Screwdrivers plus SGDP300BR and SGDP301BR Miniature *Phillips* Tip Screwdrivers (5-piece)

SGDP50BO *Phillips* Tip Screwdriver Set
Includes SGDP31IRBO, SGDP42IRBO and SGDP63IRB*O* *Phillips* Tip Screwdrivers plus SGDP300BO and SGDP301BO Miniature *Phillips* Tip Screwdrivers 5-piece)

SGDP50BG *Phillips* Tip Screwdriver Set
Includes SGDP31IRBG, SGDP42IRBG and SGDP63IRB*G* *Phillips* Tip Screwdrivers plus SGDP300BG and SGDP301BG Miniature *Phillips* Tip Screwdrivers (5-piece)

SGDP82BR

Cabinet Type

Red	Orange	Green	A	B	C	D
SGDP61BR	SGDP61BO	SGDP61BG	#1	3/16	6	10
SGDP82BR	SGDP82BO	SGDP82BG	#2	1/4	8	13
SGDP162BR	SGDP162BO	SGDP162BG	#2	1/4	16	21
SGDP122BR	SGDP122BO	SGDP122BG	#2	1/4	12	17
SGDP102BR	SGDP102BO	SGDP102BG	#2	1/4	9 3/8	14 1/4
SGDP101BR	SGDP101BO	SGDP101BG	#1	3/16	10	14 1/8



SGDP300BR

Mini Tip

Red	Orange	Green	A	B	C	D
SGDP300BR	SGDP300BO	SGDP300BG	#0	1/8	3	6
SGDP301BR	SGDP301BO	SGDP301BG	#1	3/16	3	6

SGDP50BR

SGDP216BR

Extra Long

Red	Orange	Green	A	B	C	D
SGDP116BR	SGDP116BO	SGDP116BG	#1	3/16	16	20 5/32
SGDP216BR	SGDP216BO	SGDP216BG	#2	3/16	16	20 5/32
SGDP242BR	SGDP242BO	SGDP242BG	#2	5/16	24	28 3/4

SGDDP50BR

Diamond Tip

- Diamond particles "bite" into fasteners which minimizes slipping
- Diamond particles are extremely hard for long-lasting performance and minimal wear

Set Contains: / SGDDP50BR						
Red	A	B	C	D	Blade	
SGDDP31IRBR	#1	.197	3	7 5/32	SSDDP31RB	•
SGDDP42IRBR	#2	.236	4	8 29/32	SSDDP42RB	•
SGDDP61IRBR	#1	.197	6	10 5/32	SSDDP61RB	•
SGDDP62IRBR	#2	.236	6	10 29/32	SSDDP62RB	•
SGDDP63IRBR	#3	.315	5 3/4	10 5/8	SSDDP63RB	•



Standard

Red	Orange	Green	A	B	C	D
SHDP22IRR*	SHDP22IRO*	SHDP22IRG*	#2	1/4	1 5/8	3 1/2
SHDP31IRR	SHDP31IRO	SHDP31IRG	#1	3/16	2 31/32	7 1/8
SHDP42IRR	SHDP42IRO	SHDP42IRG	#2	1/4	3 31/32	8 7/8
SHDP62IRR	SHDP62IRO	SHDP62IRG	#2	1/4	6	10 13/32
SHDP63IRR	SHDP63IRO	SHDP63IRG	#3	5/16	5 29/32	10 13/16
SHDP64IRR	SHDP64IRO	SHDP64IRG	#4	3/8	6	11 1/2

*Does not include hex bolster.

SHDP63IRR

Standard/Industrial Finish Shank

Industrial/Red	A	B	C	D
GSHDP22IRR*	#2	1/4	1 1/2	3 3/4
GSHDP31R	#1	3/16	3	7 1/4
GSHDP42R	#2	1/4	4	8 7/8

*Does not include hex bolster.

GSHDP31R

Cabinet Type

Chrome/Orange	A	B	C	D
SHDP610	#1	3/16	6	10 1/4
SHDP820	#2	1/4	8	12 7/8
SHDP1220	#2	1/4	12	16 3/4
SHDP1620	#2	1/4	16	20 3/4

SHDP820

MINI TIP AND POCKET INSTINCT®

SHDP300R

Mini Tip

Orange	Red	Green	A	B	C	D
SHDP300O	SHDP300R	SHDP300G	#0	1/8	3	5 13/16
SHDP301O	SHDP301R	SHDP301G	#1	3/16	3	5 13/16

SHDP204O

Pocket

Orange	A	D	B	C
SHDP204O	#1	4 7/8	1/8	2

SOFT GRIP Blue-Point®

BSGD7

BSGDP52

Flat Tip

Stock No.	Tip Size	Blade Length, inches	Length, inches
BSGD3	1/8	3	6 1/2
BSGD4	7/32	5	9
BSGD5	1/4	6	10 1/4
BSGD6	5/16	7	11 1/4
BSGD7	3/8	8	12 3/8

Standard *Phillips*

Stock No.	Tip Size	Blade Length, inches	Length, inches
BSGDP41	#1	4	8
BSGDP52	#2	5	9 1/4

WARNING

- Do not use screwdrivers as pry bars, chisels or punches
- Read safety precautions on pages W1 to W4

SOFT GRIP Blue-Point®

BSGDX70

Soft Grip Combination Sets

	Stock No.	Set Contains: BSGDX70
Flat Tip	BSGD3	•
	BSGD4	•
	BSGD5	•
	BSGD6	•
	BSGD7	•
Phillips®	BSGDP41	•
	BSGDP52	•

ELECTRONIC SERVICE



SSDEP61C

Electronic Miniature

- Rotating handle mechanism ideal for precise, detailed electronics work
- Blades manufactured to exacting tolerances from special heat-treated alloy steel
- Blade tip finish is industrial black

SGDE70

Electronic Thin Blade

- Recessed ends for fingertip pressure

Stock No.	A	B	C	D
SSDE42C	.018 x 1/8	1/8	2	5 5/16
SSDE43C	.018 x 1/8	1/8	3	6 5/16
SSDE44C	.018 x 1/8	1/8	4	7 5/16
SSDE46C	.018 x 1/8	1/8	6	9 5/16
SSDE48C	.018 x 1/8	1/8	8	11 5/16
SSDE63C	.030 x 3/16	3/16	3	9 9/16
SSDE64C	.028 x 3/16	3/16	4	7 9/16
SSDE66C	.030 x 3/16	3/16	6	6 9/16
SSDE68C	.028 x 3/16	3/16	8	11 9/16
SSDE610C	.030 x 3/16	3/16	10	13 9/16
SSDEP30C	#0	1/8	3	6 3/8
SSDEP31C	#1	3/16	3	6 5/8
SSDEP60C	#0	1/8	6	9 3/8
SSDEP61C	#1	3/16	6	9 5/8

Flat/*Phillips*

Stock No.	A	B	C	D	Set Contains: SGDE70
SGDE215	1.5	3/32	2	5 3/4	•
SGDE220	2.0	3/32	2	5 3/4	•
SGDE225	2.5	3/32	2	5 3/4	•
SGDE230	3.0	1/8	2	5 3/4	•
SGDEP200	#00	1/8	2	5 3/4	•
SGDEP20	#0	1/8	2	5 3/4	•
SGDEP21	#1	3/16	3	6 1/2	•

SSDE33C

Potentiometer Adjuster

Stock No.	A	B	C	D
SSDE33C	.015 x 3/32	3/32	3	5 9/16

SGDET70

TORX®

Stock No.	A	B	C	D	Set Contains: SGDET70
SGDET26	T6	1/8	2	5 1/2	•
SGDET27	T7	1/8	2	5 1/2	•
SGDET28	T8	1/8	2	5 1/2	•
SGDET29	T9	1/8	2	5 1/2	•
SGDET210	T10	1/8	2	5 1/2	•
SGDET215	T15	3/16	3	6 1/2	•
SGDET220	T20	3/16	3	6 1/2	•

Blow molded case included.

SGDEH70

Hex/Miniature

Stock No.	A	B	C	D	Set Contains: SGDEH70
SGDEH304	1/16	3/32	2	5 1/2	•
SGDEH306	3/32	1/8	3	6 1/2	•
SGDEH307	7/64	3/16	3	6 1/2	•
SGDEH315	1.5 mm	3/32	2	5 1/2	•
SGDEH320	2.0 mm (5/64)	3/32	2	5 1/2	•
SGDEH325	2.5 mm	3/32	3	6 1/2	•
SGDEH330	3.0 mm	3/16	3	6 1/2	•

Blow molded case included.

Electronic Miniature/Long

- Extra long shanks for improved reach
- Small diameter shanks provide excellent clearance in tight applications
- Rotating handle mechanism for easy turning, important when working on detailed electronics work
- Bimold handle for a comfortable, nonslip gripping surface



Flat/Phillips®

Stock No.	A	B	C	D	Set Contains: SGDEL40
SGDEL8	—	1/8	8	11 3/8	•
SGDEL10	—	3/16	10	13 3/8	•
SGDELP8	#0	1/8	8	11 3/8	•
SGDELP10	#1	3/16	10	13 3/8	•

SGDEL40

TORX® TIP SOFT HANDLE INSTINCT®



TORX Standard

- Designed for internal type *TORX* fasteners used in automotive and appliance industries

Red	Green	Orange	A	B	C	D	Set Contains: SGDTX90BR	SGDTX90BO	SGDTX90BG	SGDTX50BR
SGDTX38BR	SGDTX38BG	SGDTX38BO	T8	3/16	3	7 1/4	•	•	•	
SGDTX310BR	SGDTX310BG	SGDTX310BO	T10	3/16	3	7 1/4	•	•	•	
SGDTX315BR	SGDTX315BG	SGDTX315BO	T15	3/16	3	7 1/4	•	•	•	•
SGDTX320BR	SGDTX320BG	SGDTX320BO	T20	3/16	3	7 1/4	•	•	•	•
SGDTX425BR	SGDTX425BG	SGDTX425BO	T25	1/4	4	8 7/8	•	•	•	•
SGDTX427BR	SGDTX427BG	SGDTX427BO	T27	1/4	4	8 7/8	•	•	•	•
SGDTX430BR	SGDTX430BG	SGDTX430BO	T30	1/4	4	8 7/8	•	•	•	•
SGDTX640BR	SGDTX640BG	SGDTX640BO	T40	5/16	6	10 7/8	•	•	•	
SGDTX645BR	SGDTX645BG	SGDTX645BO	T45	5/16	6	10 7/8	•	•	•	

SGDTX90BR

Long

- Offers more torque with less cam-out
- Longer exposed lengths provide access to difficult-to-reach fasteners such as headlight assemblies
- Thin blade diameters provide optimal clearance while alloy offers strength to handle torque/turning force
- Solid *TORX* tip is stronger than a tamper-resistant *TORX* tip

Red	Green	Orange	A	B	C	D	Set Contains: SGDTXL70BR	SGDTXL70BG	SGDTXL70BO
SGDTX1008BR	SGDTX1008BG	SGDTX1008BO	T8	3/16	10	14 1/8	•	•	•
SGDTX1010BR	SGDTX1010BG	SGDTX1010BO	T10	3/16	10	14 1/8	•	•	•
SGDTX1015BR	SGDTX1015BG	SGDTX1015BO	T15	3/16	10	14 1/8	•	•	•
SGDTX1020BR	SGDTX1020BG	SGDTX1020BO	T20	3/16	10	14 1/8	•	•	•
SGDTX1225BR	SGDTX1225BG	SGDTX1225BO	T25	1/4	12	16 7/8	•	•	•
SGDTX1227BR	SGDTX1227BG	SGDTX1227BO	T27	1/4	12	16 7/8	•	•	•
SGDTX1230BR	SGDTX1230BG	SGDTX1230BO	T30	1/4	12	16 7/8	•	•	•

SGDTXL70BR

WARNING

- Do not use screwdrivers as pry bars, chisels or punches
- Read safety precautions on pages W1 to W4

TORX® TIP SOFT HANDLE INSTINCT®



SGTX40BR

TORX Mini Tip

- Designed for internal type *TORX* fasteners used in automotive and appliance industries

Set Contains: SGTX40BR, SGTX40BO, SGTX40BG

Red	Green	Orange	A	B	C	D			
SGDT308BR	SGDT308BG	SGDT308BO	T8	3/16	3	5 7/8	•	•	•
SGDT310BR	SGDT310BG	SGDT310BO	T10	3/16	3	5 7/8	•	•	•
SGDT315BR	SGDT315BG	SGDT315BO	T15	3/16	3	5 7/8	•	•	•
SGDT320BR	SGDT320BG	SGDT320BO	T20	3/16	3	5 7/8	•	•	•

SGDTRX50BR

Tamper Resistant

- Hole in the end of each bit tip fits over center peg in *TORX* tamper-resistant fasteners

Set Contains: SGDTRX50BR

Red	A	B	C	D	
SGDTRX315BR	T15	3/16	3	7 1/4	•
SGDTRX320BR	T20	3/16	3	7 1/4	•
SGDTRX425BR	T25	3/16	4	8 7/8	•
SGDTRX427BR	T27	7/32	4	8 7/8	•
SGDTRX430BR	T30	1/4	4	8 7/8	•

SGDTRXL70BR

Tamper Resistant/Long

- Hole in the end of each bit tip fits over center peg in *TORX* tamper-resistant fasteners

Applications:
VW®/Audi® door and interior trim panels plus headlight assemblies. GM® engine sensors/components and steering column multiswitches.

Set Contains: SGDTRXL70BR

Red	A	B	C	D	
SGDTRX608BR	T8	3/16	6	10	•
SGDTRX610BR	T10	3/16	6	10	•
SGDTRX615BR	T15	3/16	6	10	•
SGDTRX620BR	T20	3/16	6	10	•
SGDTRX825BR	T25	1/4	8	12 3/4	•
SGDTRX827BR	T27	1/4	8	12 3/4	•
SGDTRX830BR	T30	1/4	8	12 3/4	•

SGTRXL40BR

Tamper Resistant/Mini Tip

- Hole in the end of each bit tip fits over center peg in *TORX* tamper-resistant fasteners

Applications:
VW/Audi door and interior trim panels plus headlight assemblies.

Set Contains: SGTRXL40BR

Red	A	B	C	D	
SGDTR608B	T8	3/16	6	8 7/8	•
SGDTR610B	T10	3/16	6	8 7/8	•
SGDTR615B	T15	3/16	6	8 7/8	•
SGDTR620B	T20	3/16	6	8 7/8	•



TORX Standard

Stock No.	A	B	C	D	Set Contains: SHDTX900
SHDTX380	T8	3/16	3	7 1/4	•
SHDTX3100	T10	3/16	3	7 1/4	•
SHDTX3150	T15	3/16	3	7 1/4	•
SHDTX3200	T20	3/16	3	7 1/4	•
SHDTX4250	T25	1/4	4	8 7/8	•
SHDTX4270	T27	1/4	4	8 7/8	•
SHDTX4300	T30	1/4	4	8 7/8	•
SHDTX6400	T40	5/16	6	10 7/8	•
SHDTX6450	T45	5/16	6	10 7/8	•

SHDTX900

SPECIAL APPLICATION



90° Offset Screwdrivers

Stock No.	Tip	A	B	Set Contains: ST50A
120SSDP	Phillips®	#1 and #2	4 3/4	•
340SSDP	*Phillips*	#3 and #4	6	•
10SSD	Flat Tip	.040 x 1/4	4	•
20SSD	Flat Tip	.050 x 5/16	4 11/16	•
30SSD	Flat Tip	.060 x 3/8	5 1/2	•

ST50A

Dzus® Fastener

• For *Dzus* type fasteners used in aircraft and auto racing applications

Stock No.	Tip Thickness, inches	Tip Width, inches	Blade Length, inches	Length, inches
S6180	3/64	31/2	2	6 13/32
S6189	1/32	19/64	2	5 47/64

S6180

S6189

Reversible Blade Screwdriver and Sets

SDDD101 Reversible Blade Screwdriver Set

• Includes four reversible bits for eight different tip sizes: 1/4" and 3/16" flat tip, #1 and #2 *Phillips* tip, T15, T20, T25 and T30 *TORX* tip
• Individual 1/4" and 5/16" nut drivers
• ASME® B107
• Durable, classic hard handle is textured for a sure grip

SDDD101

SDDD41 Reversible Blade Screwdriver Set

• Includes two reversible bits for four different tip sizes: 9/32" and 13/64" flat tip, #1 and #2 *Phillips* tip
• *ASME* B107
• Durable, classic hard handle is textured for a sure grip

SDDD41

Miniature Screwdriver/Awl Set

CM6551 Miniature Screwdriver Set

• Includes four blades in the following flat tip sizes: .055", .070", .080" and .100"
• Includes awl and plastic pouch

CM6551

WARNING

• Do not use screwdrivers as pry bars, chisels or punches
• Read safety precautions on pages W1 to W4

SPECIAL APPLICATION

SGDQ16KT

Pop up Screwdriver and Diamond Bits

SGDQ6 Pop up Screwdriver

- Easy to use, spring-loaded shank can adjust to different lengths for clearance as well as compact storage (Approximately 6 1/2" and 8 1/2" lengths)
- Shank can be fully released to allow use with cordless drills
- Highly engineered collet incorporates both a magnetic and mechanical locking system to securely hold bits
- Rotating collet sleeve for "spinning" when quickly setting/removing fasteners
- Instinct® handle provides maximum turning power and greater comfort
- Diamond particles in bits "bite" into fasteners which minimizes stripping
- Diamond bits are extremely hard for long lasting performance and minimal wear
- Can accept all conventional 1/4" hex shank insert and power bits

SGDQ16KT Pop up Screwdriver Kit

Kit includes: SGDQ6 Pop up Screwdriver, SDMD221 – SDMD223 Phillips® Diamond Bits (#1, #2, #3), SDMD213 Flat Tip Diamond Bit, SDMDT10 – SDMDT30 TORX® Diamond Bits (T10 – T30) and SDMD321 – SDMD323 Power *Phillips* Diamond Bits (#1, #2, #3) in PAKSC062 Nylon Pouch.

PAKSC062 Nylon Pouch

SDDR40

Square Tip

- Square tip screwdrivers offer excellent fastener engagement
- Tips are precision cut and vapor blasted for optimal grip

Stock No.	Color	Tip	C	D	Set Contains: SDDR40
SDDROB30Y	Yellow	#0	3	6 21/32	•
SDDROB31G	Green	#1	3	6 21/32	•
SDDROB42R	Red	#2	4	8 13/32	•
SDDROB43	Black	#3	4	8 13/32	•

SSFP1

SSFP2

SSF1

Low-Profile Screwdrivers

- Screwdriver provides ability to turn screws in extremely limited access areas where other products cannot reach
- Special alloy steel screwdriver bits are the shortest bits possible (10 mm) but still allow for full engagement of the screw
- Flat, low-profile design fits in extremely tight areas
- Uses found in the aviation, aerospace and automotive industries
- Can be used in assembly, on motorcycles and small engine repairs
- Tether hole in handle to help prevent FOD (Foreign Object Damage)
- 4.27" long

SSFP1 #1 *Phillips* Tip

SSFP2 #2 *Phillips* Tip

SSF1 Flat Tip



SGD153BR

SGD155BR

SPRG618O

SPRG625O

Marine Plug Screwdrivers

- Instinct® screwdriver handles offer a unique combination of power, comfort and versatility
- Chrome-plated blade for corrosion resistance and easy cleanup

Stock No.	A	B	C	D
SGD153BR	.050	3/8	2 3/4	8 1/4
SGD155BR	.050	1/2	2 29/32	10 3/8

SGD153BR Marine Plug Screwdriver

- Blade is turned from 3/8" diameter alloy stock for strength and uniformity
- Used on medium marine plugs and medium slotted fasteners

SGD155BR Marine Plug Screwdriver

- Blade is turned from 1/2" diameter alloy stock for strength and uniformity
- Used on large marine plugs and large slotted fasteners

Push-Pull Spring Tools

- Designed to securely hold and maneuver small to medium size springs
- Deep "V-groove" tip and "C-groove" capture prevents spring from sliding off
- Use to remove light duty to medium duty compression or extension springs such as door springs, latch springs, brake adjuster springs, throttle return springs plus deck tensioner and stabilizer springs on tractors/mowers

Stock No.	A	B	C	D
SPRG618O	3/32	3/16	5 29/32	9 9/16
SPRG625O	7/64	1/4	5 29/32	10 5/16

POZIDRIV® HARD HANDLE INSTINCT®



SHDZ40R

Pozidriv/Hard Handle

- Walls on tips are less tapered than Phillips® tips
- Tips have wedges for a tight fit on *Pozidriv* fasteners
- *Phillips* tip drivers should not be used on *Pozidriv* fasteners (and vice versa), as they will ride out of the recess and round tool and screw recess corners

Stock No.	A	B	C	D	Set Contains: SHDZ40R
SHDZ22R	#2	1/4	1 1/2	3 3/4	
SHDZ31R	#1	3/16	3	7 1/4	•
SHDZ42R	#2	1/4	4	8 7/8	•
SHDZ63R	#3	5/16	6	10 7/8	•
SHDZ84R	#4	3/8	8	13 7/16	•

RATCHETING SCREWDRIVERS Blue-Point®

BSGDMR6 Ratcheting Screwdriver

- 45-tooth ratcheting mechanism ensures precise positioning and movement
- Bits are stored in a bit magazine inside the handle
- Includes 6 1/4" hex bits: flat tip (4.5 and 5.5), *Phillips* (#1 and #2) plus TORX® (T15 and T20)
- Bits are considered a consumable and carry no warranty

BSGDMR6

⚠WARNING

- Do not use screwdrivers as pry bars, chisels or punches
- Do not use "cheater bars" on handles
- Read safety precautions on pages W1 to W4

RATCHETING SCREWDRIVERS/SOFT GRIP HANDLE SYSTEM

Red, orange or green – pick your preference with a complete screwdriver from the Soft Grip Ratcheting Screwdriver System. Perfectly matched combinations of magnetic bit holding shanks and handles means a perfect match to the technician's particular requirements.

SGDMRCE44

SGDMRCE44G

SGDMRC44G

SGDMRC44O

SGDMRC11A

SGDMRC11G

SGDMRC11O

5-Position



All Handles

- Soft, solvent resistant cover material to provide a positive gripping surface
- "Thumbs up" forward/reverse lever for quick directional changes
- High quality knurled stainless steel shanks
- Contoured thumb stop at base of handle helps user apply maximum pressure to the fastener
- Smooth ratcheting mechanism
- Use with any SGDMRC series interchangeable blades and shanks
- Patented ergonomic handle shape provides comfort and control
- Comfort crown of handle cap provides low-friction surface for palm while turning

Standard Handle

- Cap functions as a bit holder when working in tight quarters
- Handle stores up to ten bits

5-Position Soft Grip

- Features 0°, 30° and 60° locking positions at the push of a button
- Designed for right- or left-hand operation
- Patented ergonomic handle shape provides comfort and control
- Cap functions as a bit holder for storage of up to seven bits
- TransDrive™ ratchet mechanism provides twice the strength of previous mechanism

Ratcheting Soft Grip

	Stock No.	Handle	Shank	Flat Tip Bit	Phillips® Bit	C	D
5-Position	SGDMRCE44	SGDMRCE4	SGDMRC1-10	SDM213B	SDM222IRB	2 5/8	8 1/2
Standard	SGDMRC44B	SGDMRC4	SGDMRC4-40	SDM213B	SDM222IRB	3 7/8	9 3/4
Stubby	SGDMRC11A	SGDMRCA1	SGDMRC1-10	—	SDM2221RB	2	4 1/2

SGDMRC1A

SGDMRCE4G

SGDMRC4AO



Handles

Red	Green	Orange	Handle	A
SGDMRC1A	SGDMRC1AG	SGDMRC1AO	Stubby	2 5/8
SGDMRC4A	SGDMRC4AG	SGDMRC4AO	Standard	6
SGDMRCE4	SGDMRCE4G	SGDMRCE4O	5-Position	5 7/8



Standard Handle

Stock No.	Handle	Color	C	D
SSDMR1A	Stubby	Black	1 15/16	4 5/16
SSDMR1AO	Stubby	Orange	1 15/16	4 5/16

Includes SDM222IRB #2 Phillips® ACR® Bit.

SSDMR1A

Stock No.	Handle	Color	C	D
SSDMR4B	Standard	Black	3 25/32	8 3/4
SSDMR4BO	Standard	Orange	3 25/32	8 3/4
SSDMR4BR	Standard	Red	3 25/32	8 3/4
SSDMR4BG	Standard	Green	3 25/32	8 3/4

Includes SDM211B (3/16") and SDM213B (9/32") Flat Tip bits plus SDM221IRB (#1), SDM222IRB (#2) and SDM223IRB (#3) *Phillips*® ACR bits.

SSDMR4BR

SSDMR4BG

RKRSSDMR4AC Service Kit
Order for servicing all the above drivers.

Stock No.	Handle	Color	C	D
SSDMR8A	Long	Black	7 7/16	12 15/16
SSDMR8AO	Long	Orange	7 7/16	12 15/16

Includes SDM211B (3/16") and SDM213B (9/32") Flat Tip bits plus SDM221IRB (#1), SDM222IRB (#2) and SDM223IRB (#3) *Phillips ACR* bits.

SSDMR8AO



T-Handle

Stock No.	Handle	Color	A	B
SSDMRT4R	Standard	Red	3 7/8	5 27/32
SSDMRT4O	Standard	Orange	3 7/8	5 27/32

SSDMRT4R

SSDMRT1O

Stock No.	Handle	Color	A	B
SSDMRT1R	Stubby	Red	2	3 15/16
SSDMRT1O	Stubby	Orange	2	3 15/16

Stock No.	Handle	Color	A	B
SSDMRT8A	Long	Black	8	10

Includes the following bit: SDM222IRB #2 *Phillips ACR.*

RKRSSDMR4AC Service Kit
Order for servicing all the above drivers.

SSDMRT8A



Interchangeable Shanks

- Use with handles in the soft grip ratcheting screwdriver system
- Neodymium magnet in shank holds bit securely
- 1/4" square drive shanks in standard and flexible styles allow attachment of a wide range of 1/4" drive sockets and accessories

SGDMRC1-10

SGDMRC4-40

Stock No.	Description	C	D
SGDMRC1-10	Magnetic Bit Holder	3 1/4	2
SGDMRC4-40	Magnetic Bit Holder	5	3 3/4
SGDMRC4-80	Magnetic Bit Holder	9	7 3/4
SGDMRC4-TM4	1/4" Sq. Dr. Shank	5	3 3/4
SGDMRC4-TMF4	Flexible 1/4" Sq. Dr. Shank	6 1/4	5
SGDMRC4-C6*	Non-Conductive Composite Magnetic Bit Holder	7 1/4	6
SGDMRC-SP	1/4" Speeder Shank	13	—

SGDMRC4-80

SGDMRC4-TM4

SGDMRC4-TMF4

SGDMRC-SP Speeder Shank

- Ideal for aviation technicians and other applications where accessibility is limited

* Individually tested to protect up to 1,000 volts AC, 1,500 volts DC. SGDMRC4-C6 is not UL® Listed.

SGDMRC4-C6

SGDMRC-SP

⚠WARNING

- Do not use screwdrivers as pry bars, chisels or punches
- Read safety precautions on pages W1 to W4

RATCHETING SCREWDRIVER SETS

Soft Grip Ratcheting Screwdriver Sets

- SGDMRC starter sets include standard handle, medium and long magnetic bit holding shanks plus two flat tip bits, two Phillips® bits and one TORX® bit to meet most basic job requirements

SGDMRC103A

SGDMRC108AO

SGDMRC103A Red Ratcheting Screwdriver Set

Stock No.	Description
SGDMRC4A	Ratcheting Handle
SGDMRC4-40	Magnetic Shank/Bit Holder
SGDMRC4-80	Magnetic Shank/Bit Holder
SDM211B	3/16" Flat Tip Bit
SDM213B	9/32" Flat Tip Bit
SDM221IRB	#1 *Phillips* ACR® Bit
SDM222IRB	#2 *Phillips ACR* Bit
SDMT15D	T15 *Torx* Bit
PB146A	Storage Case

SGDMRC103AO Orange Ratcheting Screwdriver Set

- Same as SGDMRC103A set except has SGDMRC4O orange ratcheting handle

SGDMRC103AG Green Ratcheting Screwdriver Set

- Same as SGDMRC103A set except has SGDMRC4AG green ratcheting handle

SGDMRC108AO Orange Ratcheting Screwdriver Set

Stock No.	Description
SGDMRC1A	Ratcheting Handle
SGDMRC4A	Ratcheting Handle
SGDMRC1-10	Magnetic Shank/Bit Holder
SGDMRC4-40	Magnetic Shank/Bit Holder
SGDMRC4-80	Magnetic Shank/Bit Holder
SGDMRC4-TM4	1/4" Drive Shank
SDM400A	Master Bit Kit
PB146A	Storage Case

SGDMRC108A Red Ratcheting Screwdriver Set

- Same as SGDMRC108AO set except has SGDMRC1A and SGDMRC4A ratcheting handles

SGDMRC108AG Green Ratcheting Screwdriver Set

- Same as SGDMRC108A set except has SGDMRC1AG and SGDMRC4AG green ratcheting handles

DHW1

SHORTORX

SHORTORX Bit Set (Blue-Point®)

Vehicle Applications:
BMW® vehicles: Under dash and sensors in engine compartment. Cadillac® vehicles: Water pumps; *Cadillac* CTS, 3.2 L, 2003–2004/*Cadillac* Catera 3.0 L, 1997 – 2001: oil drain plug; Ford® vehicles: Escort, early model: Door hinge bolts; GM® vehicles: Fender applications; Jeep® vehicles: Cherokee, 1997 – 1998: Door hinge bolts; VW® vehicles, prior to 1999: Exterior and interior door hinge bolts.

Stock No.	Description	Size	Set Contains: SHORTORX
SDMTAS15	T15	5/16	•
SDMTAS20	T20	5/16	•
SDMTAS25	T25	5/16	•
SDMTAS27	T27	5/16	•
SDMTAS30	T30	5/16	•
SDMTAS40	T40	5/16	•
SDMTAS45	T45	5/16	•
DHW1	Reversible Ratcheting Bit Wrench	—	•

DHW1 Reversible Ratcheting Bit Wrench *Blue-Point*

- Overall length: 10.75" (273 mm)
- Low head clearance for access to tight spots
- Internal ring in square drive provides more secure bit retention than magnetic models

Magnetic Ratchet and Bit Set

TM72SET Magnetic Ratchet and Bit Set

- Ideal for accessing fasteners in tight areas
- Ratchet features magnetic retention for 1/4" hex bits
- SDM211 (3/16") Flat Tip bit
- SDM213B (9/32") Flat Tip bit
- SDM221IRB (#1) Phillips® ACR® bit
- SDM222IRB (#2) *Phillips ACR* bit
- SDM15D (T15) TORX® bit
- Use RKRTM72A Service Kit

TM72SET

Includes:

Stock No.	○	○ 5°	A	B	C	D
TM72SET	72	5°	7/16	15/16	1 3/4	4 7/16

YA480B

BTWSMPK

BTWOSK

Ratcheting Offset Screwdrivers (Blue-Point®)

YA480B Right Angle Ratcheting Screwdriver

Includes one each:

- Flat Tip, #2 *Phillips*®, #2 Pozidriv® bits

BTWSMPK Miniature Ratcheting Handle Set

Includes:

- BTWSM, BTWOS and BTWROS mini ratcheting handles
- SDM213B (9/32") flat tip bit
- SDM213B (9/32") flat tip bit
- SDM221IRB (#1)
- SDM222IRB (#2) *Phillips ACR* bits
- SDMT150D (T15) *TORX* bit

BTWOSK Miniature Ratcheting Handle Set

Includes:

- BTWOS mini ratcheting handle
- SDM213B (9/32") flat tip bit
- SDM221IRB (#1)
- SDM222IRB (#2) *Phillips ACR* bits
- SDMT15D (T15) *TORX* bit

BTWS Miniature Ratcheting Handle Straight

BTWOS Miniature Ratcheting Handle 25° Offset

BTWROS Miniature Ratcheting Handle 25° Reverse Offset

Features:

- 72-tooth ratchet engagement with only 5° movement to engage the next tooth
- 25° offset handles help avoid knuckle injuries
- Magnetic holder keeps bits in place



Aluminum Starters

- Spring loaded steel bits grip screw slot wall to withstand an 8 lb pull
- Bits release automatically when applied torque reaches a certain level

Stock No.	A	B	C	D
SS5A	5/16	Flat Tip	.032 x 9/32	5
SSM3*	5/16	Flat Tip	.032 x 9/32	2 1/2
SSM5A*	5/16	Flat Tip	.032 x 9/32	5 1/4
SSM6A*	9/32	*Phillips*	#3	5 1/2
GA260A	9/32	*Phillips*	#2	2 5/8
GA261B	9/32	*Phillips*	#3	5 5/8
GA199A	9/32	Combination	.032 x 9/32, #2	5 7/8

*Aluminum handle with magnet.

SS5A SSM5A SSM6A

GA260A GA199A

SSR7

SSR7 Recessed Screw and Nut Starter

- Round aluminum body with knurled gripping area in center
- Designed to accommodate the most popular sizes of recessed screws: *TORX*, Socket Head, *Phillips*, etc.
- Opposite end handles #3, #4, #6, #8 and #10 nuts
- Overall length is 6 3/4"

⚠WARNING

- Do not use screwdrivers as pry bars, chisels or punches
- Do not use "cheater bars" on handles
- Read safety precautions on pages W1 to W4

NUT DRIVERS

NDDM900A

Hard Handle, mm, 6-Point

Set Contains: NDDM900A

mm	Stock No.	A*	B	
5	NDDM50A	7.5	169	•
6	NDDM60A	7.5	169	•
7	NDDM70A	9.1	169	•
8	NDDM80A	9.9	169	•
9	NDDM90A	9.9	188	•
10	NDDM100A	13.1	207	•
11	NDDM110A	13.1	207	•
12	NDDM120A	13.1	221	•
13	NDDM130A	13.1	221	•

*Socket Length

NDSGM600

Ergonomic Soft Grip Handle, mm, 6-Point

Set Contains: NDSGM600

mm	Stock No.	Handle Color	Length	
7	NDSGM7	Blue	160	•
8	NDSGM8	Blue	160	•
10	NDSGM10	Blue	160	•
12	NDSGM12	Blue	160	•
13	NDSGM13	Blue	160	•
14	NDSGM14	Blue	160	•

102NDL10



NDD900B

Hard Handle, inches, 6-Point

Set Contains: NDD900B

11	Stock No.	Color	A*	B	
3/16	NDD106B	Black	19/64	6 21/32	•
7/32	NDD107BBR	Brown	19/64	6 21/32	•
1/4	NDD108BR	Red	19/64	6 21/32	•
9/32	NDD109BO	Orange	23/64	6 21/32	•
5/16	NDD110BY	Yellow	23/64	6 21/32	•
11/32	NDD111BG	Green	25/64	6 21/32	•
3/8	NDD112BB	Blue	25/64	7 13/32	•
7/16	NDD114BBR	Brown	33/64	8 5/32	•
1/2	NDD116BR	Red	33/64	8 21/32	•
9/16	NDD118BO	Orange	47/64	9 1/4	
5/8	NDD120BY	Yellow	47/64	9 1/4	

*Socket Length

NDSG600

Ergonomic Soft Grip Handle, inches, 12-Point

Set Contains: NDSG600

11	Stock No.	Handle Color	Length	
1/2	NDSG12	Red	6 3/8	•
1/4	NDSG14	Red	6 3/8	•
3/8	NDSG38	Red	6 3/8	•
5/16	NDSG516	Red	6 3/8	•
7/16	NDSG716	Red	6 3/8	•
9/32	NDSG932	Red	6 3/8	•

Locking Nut Drivers (Blue-Point®)

- Tools lock onto hex screws
- Great for hose clamp and other hard-to-reach applications

Set Contains: 102NDL10 | 102NDLM10

Stock No.	Size	Length		
NDL1410	1/4	10	•	
NDL51610	5/16	10	•	
NDLM610	6 mm	10		•
NDLM710	7 mm	10		•

SDM400A

Master Bit Set (1/4" Hex)

SDM400A Master Bit Kit

- 37pc set
- 1/4" hex shank bits
- SDM11 magnetic insert bit holder for quick hex bit changes when using cordless drill or screw gun
- TMBS8A 1/4" hex magnetic socket for use with 1/4" drive handles
- GMB3042 1/4" power hex to square adaptor

Includes all bits below:

	Stock No.	#
Flat Tip Bit	SDM211B	.031" x .187"
	SDM212B	.035" x .219"
	SDM213B	.038" x .250"
	SDM214C	.046" x .312"
	SDM215C	.055" x .375"
Hex Bit	SDM2704D	1/16"
	SDM2705D	5/64"
	SDM2706D	3/32"
	SDM2707D	7/64"
	SDM2708D	1/8"
	SDM2709D	9/64"
	SDM2710D	5/32"
	SDM2712D	3/16"
	SDM2714D	7/32"
	SDM2716D	1/4"
Phillips® ACR® Bit	SDM221IRB	#1
	SDM222IRB	#2
	SDM223IRB	#3
TORX® Bit	SDMT8D	T8
	SDMT9D	T9
	SDMT10D	T10
	SDMT15D	T15
	SDMT20D	T20
	SDMT25D	T25
	SDMT27D	T27
	SDMT30D	T30
	SDMT40D	T40
POZIDRIV® *ACR* Bit	SDM251IRC	#1
	SDM252IRB	#2
	SDM253IRC	#3
Scrulox® Bit	BTS0	#0
	BTS1	#1
	BTS2	#2
	BTS3	#3
Storage Case	PB90A	

SDM410

Master Bit Set (1/4" Hex)

SDM410 Metric Bit Set

- Popular array of adaptors allowing use with hand or cordless tools
- Blow molded parts case to keep components organized (PB900)

	Stock No.	#
Flat Tip Bit	SDM211B	.031" x .187"
	SDM212B	.035" x .219"
	SDM213B	.038" x .250"
	SDM214C	.046" x .312"
	SDM215C	.055" x .375"
Phillips ACR Bit	SDM221IRB	#1
	SDM222IRB	#2
	SDM223IRB	#3
POZIDRIV ACR Bit	SDM251IRC	#1
	SDM252IRB	#2
	SDM253IRC	#3
Phillips Limited Clearance Bit	SDM222CZ	#2
Metric Hex Bit	SDMM2702.5B	2.5 mm
	SDMM2702B	2 mm
	SDMM2703B	3 mm
	SDMM2704C	4 mm
	SDMM2705C	5 mm
	SDMM2706C	6 mm
	SDMM2708B	8 mm
	SDMM2710B	10 mm
TORX Bit	SDMT8D	T8
	SDMT9D	T9
	SDMT10D	T10
	SDMT15D	T15
	SDMT20D	T20
	SDMT25D	T25
	SDMT27D	T27
	SDMT30D	T30
	SDMT40D	T40
TORX Tamper-Resistant Bit	SDMTR10	T10
	SDMTR15	T15
	SDMTR20	T20
	SDMTR25	T25
	SDMTR27	T27
	SDMTR30	T30
	SDMTR40	T40
	SDMTR8	T8
1/4" Hex opening, 1/4" drive	TMBS8A	
1/4" Hex to 1/4" Square	GMB3042	
Insert Bit Magnetic Holder	SDM11	
Storage Case	PB900	

BIT SETS

SDM32KT

Ball Hex Bit Sets (1/4" Hex)

SDM32KT Ball Hex Set (Blue-Point®)
- 1/4" shank bits for use in difficult access applications where fastener cannot be approached straight on
- 32pc set

	Stock No.	#
Metric	SDMBMH2702	2 mm
	SDMBMH2702.5	2.5 mm
	SDMBMH2703	3 mm
	SDMBMH2704	4 mm
	SDMBMH2705	5 mm
	SDMBMH2706	6 mm
	SDMBMH2707	7 mm
	SDMBMH2708	8 mm
	SDMBMH2709	9 mm
	SDMBMH2710	10 mm
Fractional	SDMBH2706	3/32"
	SDMBH2707	7/64"
	SDMBH2708	1/8"
	SDMBH2709	9/64"
	SDMBH2710	5/32"
	SDMBH2712	3/16"
	SDMBH2714	7/32"
	SDMBH2716	1/4"
	SDMBH2720	5/16"
	SDMBH2724	3/8"

	Stock No.	#
TORX®	SDMBT10	T10
	SDMBT15	T15
	SDMBT20	T20
	SDMBT25	T25
	SDMBT27	T27
	SDMBT30	T30
	SDMBT40	T40
	SDMBT45	T45
	SDMBT50	T50
	SDMBT55	T55
Bit Holder	SDM13	—
1/4" Fem Hex to 1/4" Fem Sq Dr. Adaptor	TMBS108	—

SDM11KT

SDM11KT *TORX* Ball Hex Set *(Blue-Point)*
- 1/4" shank bits for use in difficult access applications where fastener cannot be approached straight on
- 11pc set
- Includes storage case with belt clip

	Stock No.	#
TORX	SDMBT10	T10
	SDMBT15	T15
	SDMBT20	T20
	SDMBT25	T25
	SDMBT27	T27
	SDMBT30	T30
	SDMBT40	T40
	SDMBT45	T45
	SDMBT50	T50
Bit Holder	SDM13	—
1/4" Fem Hex to 1/4" Fem Sq Dr. Adaptor	TMBS108	—

SDMC8D

SDMC8GT

Ratcheting Screwdriver Bit Sets

- All bits are 1/4" hex shank

SDMC8D Screwdriver Bit Set
- Set includes one Flat Diamond Tip Bit (1 mm), three Phillips® Diamond Tip Bits (#1, #2, #3) and four *TORX* Diamond Tip Bits (T15, T20, T25, T30) in SDMC8 Storage Case

SDMC8RD Screwdriver Bit Set
- Set includes one Flat Diamond Tip Bit (1 mm), three *Phillips* Diamond Tip Bits (#1, #2, #3) and four *TORX* Diamond Tip Bits (T15, T20, T25, T30) in SDMC8R Storage Case

SDMC8T Screwdriver Bit Set
- Set includes eight *TORX* Bits (T8–T30) in SDMC8 Storage Case

SDMC8GT Screwdriver Bit Set
- Set includes eight *TORX* Bits (T8–T30) in SDMC8G Storage Case

SDMC8OT Screwdriver Bit Set
- Set includes eight *TORX* Bits (T8–T30) in SDMC8O Storage Case

SDMC8RT Screwdriver Bit Set
- Set includes eight *TORX* Bits (T8–T30) in SDMC8R Storage Case

	Stock No.	#
Flat Tip Diamond Bit	SDMD213	1 mm/5.5 mm
Phillips Diamond Bit	SDMD221	#1
	SDMD222	#2
	SDMD223	#3
TORX Diamond Bit	SDMDT15	T15
	SDMDT20	T20
	SDMDT25	T25
	SDMDT30	T30
TORX Bit	SDMT8D	T8
	SDMT9D	T9
	SDMT10D	T10
	SDMT15D	T15
	SDMT20D	T20
	SDMT25D	T25
	SDMT27D	T27
	SDMT30D	T30

Ratcheting Screwdriver Bit Sets

- All bits are 1/4" hex shank

SDMC8P Screwdriver Bit Set
- Set includes two Flat Tip Bits (.031", .038"), three Phillips® Bits (#1, #2, #3), one Limited Clearance *Phillips* Bit (#2), one Scrulox® Bit (#2) and 1" Adaptor in SDMC8 Storage Case

SDMC8GP Screwdriver Bit Set
- Same as SDMC8P but uses SDMC8G Green Storage Case

SDMC8OP Screwdriver Bit Set
- Same as SDMC8P but uses SDMC8O Orange Storage Case

SDMC8RP Screwdriver Bit Set
- Same as SDMC8P but uses SDMC8R Red Storage Case

SDMC8H Screwdriver Bit Set
- Set includes eight Hex Bits 3/32"–5/16" in SDMC8 Storage Case

SDMC8RH Screwdriver Bit Set
- Same as SDMC8H but uses SDMC8R Red Storage Case

SDMC8MH Screwdriver Bit Set
- Set includes eight Metric Hex Bits 2 mm–10 mm in SDMC8 Storage Case

SDMC8RMH Screwdriver Bit Set
- Same as SDMC8MH but uses SDMC8R Red Storage Case

Storage Case
- Case is designed to fit the shank of Snap-on® ratcheting screwdriver allowing the tools to be stored together
- Indexable tray has good bit spacing and pivots up to make bit selection/removal easy
- Case available in Red, Black, Green and Orange

SDMC8 Bit Storage Case Black

SDMC8GP

SDMC8OP

Description	Stock No.	Size
Flat Tip Bit	SDM211B	.031" x .187"
	SDM213B	.038" x .250"
Phillips ACR® Bit	SDM221IRB	#1
	SDM222IRB	#2
	SDM223IRB	#3
Phillips Limited Clearance Bit	SDM222CZ	#2
Scrulox Bit	BTS2	#2
Hex-to-Square Adaptor	GMB3041	1/4" Hex to 1/4" Square
Hex Bit	SDM2706D	3/32"
	SDM2708D	1/8"
	SDM2709D	9/64"
	SDM2710D	5/32"
	SDM2712D	3/16"
	SDM2714D	7/32"
	SDM2716D	1/4"
	SDM2720D	5/16"
Metric Hex Bit	SDMM2702B	2 mm
	SDMM2702.5B	2.5 mm
	SDMM2703B	3 mm
	SDMM2704C	4 mm
	SDMM2705C	5 mm
	SDMM2706C	6 mm
	SDMM2708B	8 mm
	SDMM2710B	10 mm

Power Bit Set

SDMEXT27K Adaptor and Bit Set (27pc)

Description	Stock No.	
Flat Tip Bit	SDM211B	.031" x .187"
	SDM212B	.035" x .219"
	SDM213B	.038" x .250"
Phillips ACR Bit	SDM221IRB	#1
	SDM222IRB	#2
	SDM223IRB	#3
Phillips Power Bit	SDM321B	#1
	SDM322B	#2
	SDM323A	#3
Magnetic Nutsetter	SDMN25	1/4" Hex x 1/4"
	SDMN31	1/4" Hex x 5/16"
Scrulox Bit	BTS1	#1
	BTS2	#2
	BTS3	#3
TORX Bit	SDMT10D	T10
	SDMT15D	T15
	SDMT20D	T20
	SDMT25D	T25
	SDMT27D	T27
	SDMT30D	T30
Hex-to-Square Adaptor, 1/4" Hex to 1/4" Square	GMB3041	1" Long
	GMB3042	2" Long
	GMB3046	6" Long
Hex-to-Square Adaptor, 1/4" Hex to 3/8" Square	AB3042	2" Long
	AB3046	6" Long
Insert Bit Magnetic Holder	SDM11	—
Quick-Change Coupler, 1/4" Drive	TMC109A	—

SDMEXT27K

WARNING • Read safety precautions on pages W1 to W4

BIT SETS

SDML19KT

SDMEXT19K

CTS561BITXL

YA52PBSQC

Power Bit Sets

SDML19KT Long Power Bit Set
- Includes an assortment of popular sized bits to cover a wide range of applications
- Helps avoid costly damage to work surface by eliminating chuck contact

Includes:
- Four flat tip bits: two 3" long, (2) 6" long
- Six Phillips® bits: three 2 3/4" long, three 6" long
- Eight TORX® bits: four 2 3/4" long, four 6" long
- TMC109A quick change coupler

SDMEXT19K Adaptor and Bit Set
- Complete set includes the most popular sizes and lengths of extensions, adaptors and bits
- 1/4" hex to 1/4" or 3/8" square drives hex-to-square adaptors for use with sockets (2" and 6" long)
- Magnetic bit holder for use with insert bits and quick change coupler for use with 1/4" hex power bits

Includes:
- Three flat tip
- Three *Phillips*
- Three *Phillips* insert bits
- Three *TORX* power bits

CTS561BITXL Adaptor and Bit Set
- Comprehensive set offering including stainless steel insert bit adaptor
- Additional length provides greater access and minimizes drill contact with work surface
- Ideal for use with cordless drills and screwdrivers
- Power bits made from tough S2 steel
- Overmolded bit case with indexable trays for easy storage

Set includes:
- T8, T10, T15, T20, T25, T27, T30
- *Phillips* #1, #2, #3
- Square #1, #2
- Slotted
- 6" Stainless Adaptor with magnet retention
- SDM611 Adaptor, 6" Magnetic Bit
- CTS561BITCS indexable case

YA52PBSQC Power Bit Set (Blue-Point®)
- Ideal for use with cordless drills and screwdrivers

Includes:
- Seven six-lobe star (tamper-proof) insert bits
- Three square insert bits
- Four *Phillips* ACR® insert bits
- Four slotted insert bits
- Seven hex insert bits
- Two clutch insert bits
- Six six-lobe star (tamper-proof) power bits
- Three square power bits
- Three *Phillips ACR* power bits
- Three slotted power bits
- Three hex power bits
- Three socket adaptors
- Quick change chuck
- Two *Phillips* double end bits
- Square bit holder
- Storage case

Magnetic Insert Bit Holders

SDM11 Insert Bit Magnetic Holder
- For quick hex bit changes when used with electric drill or screw gun
- Magnetic and lock ring bit retention
- 2 7/8" long

SSDM10A Bits Pocket Box
- Pocket sized storage system for SDM series bits
- Includes quick change bit holder

SSDM28 Magnetic Hex Bit Organizer
- Holds eight 5/16" and (18) 1/4" hex bits
- Five clips slide on rail to easily access bit
- Magnets on base of holder for attachment to any ferrous metal surface
- Plastic material helps protect finished surface from scratches

SDM611 Insert Bit Magnetic Holder
- For quick hex bit changes when used with electric drill or screw gun
- Magnetic bit retention
- 6" long

SDM11

SSDM10A

SSDM28

SDM611

Screwdriver Bit Holders

SDM12 Insert Bit Holder
- Lock ring bit retention for quick hex bit changes
- 1 1/8" long

TMC109A Quick Change Coupler
- Use with any 1/4" drive handle
- Spring release shell retracts to accept 1/4" hex power type bits
- Ideal for production situations where positive bit retention is required

SDM12

TMC109A

Screwdriver Bit Sockets

- For use with standard 1/4" hex SDM series screwdriver bits

Stock No.	Description
FBS8	3/8" Drive, Socket for 1/4" Hex Shanks
FBS9	3/8" Drive, Socket for 5/16" Hex Shanks
CFSSB8	Insulating Universal Bit Socket, 1/4" hex opening, 3/8" drive

FBS8

CFSSB8

Magnetic Screwdriver Bit Sockets

- For use with standard 1/4" hex SDM series screwdriver bits

Stock No.	Description
TMBS8A	1/4" hex opening, 1/4" drive
GTMBS8A	1/4" hex opening, 1/4" drive. Black industrial finish
TMUBS8	1/4" hex opening, 1/4" drive
FBSM8A	1/4" hex opening, 3/8" drive

TMBS8A

TMUBS8

Magnetic Nut Drivers

- Allows ratcheting screwdrivers (with 1/4" hex end) to be used as a nut driver
- Magnet securely holds nut during use

Stock No.	Size	Hex Size, inches	Length, inches
SDMN25	1/4	1/4	1 3/4
SDMN31	5/16	1/4	1 3/4

SDMN31

Hex-to-Square Adaptors (Power)

- 1/4" hex size; 1" length of hex



Stock No.	A	B
GMB3041*	Friction Ball	1
GMB3042	Friction Ball	2
GMB3046	Friction Ball	6
AB3042	Ball Detent	2
AB3044	Ball Detent	4
AB3046	Ball Detent	6

*Insert Bit Style, non-impact

GMB3046

AB3042

⚠WARNING

- Do not use chrome or industrial finish hand tools with impact drivers
- Read safety precautions on pages W1 to W4

1/4" HEX SHANK BITS

	Stock No.	#
Flat Tip	SDM211B**	.031" x .187"
	SDM212B**	.035" x .219"
	SDM213B**	.038" x .250"
	SDM214C**	.046" x .312"
	SDM215C**	.055" x .375"
Phillips®	SDM221C	#1
	SDM222ZB	#2
	SDM222CZ*	#2
	SDM223C	#3
Reed & Prince	SDM231A	#2
Clutch A	SDM242	3/32"
	SDM243	1/8"
	SDM244	5/32"
	SDM245	3/16"
	SDM246	1/4"
	SDM247	5/16"
Clutch G	SDM242G	3/32"
	SDM243G	1/8"
	SDM244G	5/32"
	SDM245G	3/16"
	SDM246G	1/4"
Hex, inches	SDM2704D**	1/16"
	SDM2705D**	5/64"
	SDM2706D**	3/32"
	SDM2707D**	7/64"
	SDM2708D**	1/8"
	SDM2709D**	9/64"
	SDM2710D**	5/32"
	SDM2712D**	3/16"
	SDM2714D**	7/32"
	SDM2716D**	1/4"
	SDM2720D	5/16"
	SDM2724D	3/8"
Hex, mm	SDMM2702B	2 mm
	SDMM2702.5B	2.5 mm
	SDMM2703B	3 mm
	SDMM2704C	4 mm
	SDMM2705C	5 mm
	SDMM2706C	6 mm
	SDMM2708B	8 mm
	SDMM2710B	10 mm
Pozidriv®	SDM251C**	#1
	SDM252C**	#2
	SDM253C**	#3

SDM221IRB

SDM221IRB

Phillips ACR® Installer/Remover

- Anti-camout ribs bite into fasteners and help prevent camout

Stock No.	#
SDM221IRB***	#1
SDM222IRB***	#2
SDM223IRB***	#3

***Part of SDM400A Master Bit Set

	Stock No.	#
Torx®	SDMT6A	T6
	SDMT7A	T7
	SDMT8D**	T8
	SDMT9D**	T9
	SDMT10D**	T10
	SDMT15D**	T15
	SDMT20D**	T20
	SDMT25D**	T25
	SDMT27D**	T27
	SDMT30D**	T30
	SDMT40D**	T40
Square	BTS0**	#0
	BTS1**	#1
	BTS2**	#2
	BTS3**	#3
Tri-Wing	BTW0A	#0
	BTW1A	#1
	BTW2A	#2
	BTW3A	#3
	BTW4A	#4
	BTW5A	#5
	BTW6A	#6
Double Square	BTSS2	#2

*Small profile/narrow tip **Included as part of SDM400A Master Bit Set

- BTS and BTSS Series bits can be used on recessed double square fasteners used on trailer and RV exteriors
- Bit size varies by application

SDMTW8A

SDMW221A

Wobble Bits

- Give up to an 18° angle of "wobble"

Stock No.	#
SDMTW8A	T8
SDMTW9A	T9
SDMTW10A	T10
SDMTW15A	T15
SDMTW20A	T20
SDMTW25A	T25
SDMTW27A	T27
SDMTW30A	T30
SDMTW40A	T40
SDMW221A	#1
SDMW222A	#2
SDMW223A	#3

SDMTR8

Tamper - Resistant *TORX*

- Bits SDMTR8 through SDMTR40 are all 1/4", bits SDMTR45 and SDMTR50 are 5/16"

Stock No.	#
SDMTR8	T8
SDMTR10	T10
SDMTR15	T15
SDMTR20	T20
SDMTR25	T25
SDMTR27	T27
SDMTR30	T30
SDMTR40	T40
SDMTR45	T45
SDMTR50	T50

Pozidriv ACR Installer/Remover

- Anti-camout ribs bite into fasteners and help prevent camout

SDM252IRA

Stock No.	#
SDM251IRC***	#1
SDM252IRC***	#2
SDM253IRC***	#3

***Part of SDM400A Master Bit Set

Diamond Tip Insert Bits

- Diamond particles "bite" into fasteners which minimizes slipping
- Diamond particles are extremely hard for long-lasting performance and minimal wear

	Stock No.	#
Phillips®	SDMD221	#1
	SDMD222	#2
	SDMD223	#3
Flat Tip	SDMD212	.8 mm/5.5 mm
	SDMD213	1 mm/5.5 mm
	SDMD214	1.2 mm/6.5 mm
TORX®	SDMDT10	T10
	SDMDT15	T15
	SDMDT20	T20
	SDMDT25	T25
	SDMDT30	T30
	SDMDT40	T40

Diamond Tip Power Bits

	Stock No.	#
Power Bit	SDMD321	#1
	SDMD322	#2
	SDMD323	#3

Mortorq® Bits

- Typically used on aerospace applications
- Low-profile head design, high-strength torque acceptance and lighter weight

	Stock No.	#
Mortorq	SDMMT00	#00
	SDMMT0	#0
	SDMMT1	#1
	SDMMT2	#2
	SDMMT3	#3

INSERT BITS

TORX

	Stock No.	#		Length, inches
TORX	SDMTA40	T40	.312	1 1/4
	SDMTA45	T45	.312	1 1/4
	SDMTA50	T50	.312	1 1/4
	SDMTA55	T55	.312	1 1/4

Specialty Bit

	Stock No.	
	SDM3D24	.312

SDM3D24 Flat Tip/#2 Phillips® Insert Bit

- Double end bit #2 *Phillips* and .05" slotted tip
- For use with SDDDM series pocket screwdrivers

BLPTMBS1414

Bit Holder and 1/4" Bits (Blue-Point®)

Stock No.	Description	Size
BLPTMBS1414	Bit Holder (for 1/4" hex bits)	—
BLPTMBS3814	Bit Holder (for 1/4" hex bits)	3/8"
BLPHB18	Hex Bit	1/8"
BLPHB964	Hex Bit	9/64"
BLPHB532	Hex Bit	5/32"
BLPHB316	Hex Bit	3/16"
BLPHB732	Hex Bit	7/32"
BLPHB14	Hex Bit	1/4"
BLPHBM3	Metric Hex Bit	3 mm
BLPHBM4	Metric Hex Bit	4 mm
BLPHBM5	Metric Hex Bit	5 mm
BLPHBM6	Metric Hex Bit	6 mm
BLPTB10TP	Tamper-Resistant *TORX* Bit	T10
BLPTB15TP	Tamper-Resistant *TORX* Bit	T15
BLPTB20TP	Tamper-Resistant *TORX* Bit	T20
BLPTB25TP	Tamper-Resistnat *TORX* Bit	T25
BLPTB30TP	Tamper-Resistant *TORX* Bit	T30
BLPFB532	Flat Tip Bit	5/32"
BLPFB732	Flat Tip Bit	7/32"
BLPFB932	Flat Tip Bit	9/32"
BLPFB316	Flat Tip Bit	3/16"
BLPFB14	Flat Tip Bit	1/4"
BLPPB0	*Phillips* Tip Bit	#0
BLPPB1	*Phillips* Tip Bit	#1
BLPPB2	*Phillips* Tip Bit	#2
BLPPB3	*Phillips* Tip Bit	#3
BLPSQB1	Square Tip Bit	#1
BLPSQB2	Square Tip Bit	#2

⚠WARNING

- Do not use chrome or industrial finish hand tools with impact drivers
- Read safety precautions on pages W1 to W4

POWER BITS

Phillips®

	Stock No.	#		A	B
Phillips	SDM220A	#0	1/4	—	1
	SDM320A	#0	1/4	.125	1 15/16
	SDM321B	#1	1/4	.187	1 15/16
	SDM322B	#2	1/4	.234	1 15/16
	SDM323A	#3	1/4	.234	1 15/16
	SDM421B	#1	1/4	.187	2 3/4
	SDM422B	#2	1/4	.234	2 3/4
	SDM423B	#3	1/4	.234	2 3/4
	SDM521A	#1	1/4	.187	3 1/2
	SDM522A	#2	1/4	.234	3 1/2
	SDM523A	#3	1/4	.234	3 1/2
	SDM621A	#1	1/4	.187	6
	SDM622A	#2	1/4	.234	6
	SDM623A	#3	1/4	.234	6
	SDMA421	#1	5/16	.250	3
	SDMA422A	#2	5/16	.250	3
	SDMA423A	#3	5/16	.296	3
	SDMB422A	#2	7/16	.312	3
	SDMB423A	#3	7/16	.312	3
	SDMB424A	#4	7/16	.375	3
	SDMB522A	#2	7/16	.312	4 1/2
	SDMB523A	#3	7/16	.312	4 1/2
	SDMB524A	#4	7/16	.375	4 1/2
	SDMB622	#2	7/16	.312	6
	SDMB623A	#3	7/16	.312	6
	SDMB624A	#4	7/16	.312	6

Flat Tip

	Stock No.	#		A	B
Flat Tip	SDM311B	.026" x .122"	1/4	.187	1 15/16
	SDM312B	.028" x .134"	1/4	.187	1 15/16
	SDM313B	.032" x .154"	1/4	.187	1 15/16
	SDM314B	.034" x .187"	1/4	.187	1 15/16
	SDM315A	.036" x .215"	1/4	.234	1 15/16
	SDM316A	.038" x .250"	1/4	.234	1 15/16
	SDM317A	.042" x .275"	1/4	.234	1 15/16
	SDM318A	.046" x .312"	1/4	.234	1 15/16
	SDM319A	.050" x .360"	1/4	.234	1 15/16
	SDM411B	.026" x .122"	1/4	.234	3
	SDM412B	.028" x .134"	1/4	.187	3
	SDM413B	.032" x .154"	1/4	.187	3
	SDM414A	.034" x .187"	1/4	.187	3
	SDM415A	.036" x .215"	1/4	.250	3
	SDM416A	.038" x .250"	1/4	.234	3
	SDM417A	.042" x .275"	1/4	.234	3
	SDM418A	.046" x .312"	1/4	.234	3
	SDM419A	.050" x .360"	1/4	.234	3
	SDM511A	.026" x .122"	1/4	.187	3 1/2
	SDM512A	.028" x .134"	1/4	.187	3 1/2
	SDM513A	.032" x .154"	1/4	.187	3 1/2
	SDM514A	.034" x .187"	1/4	.187	3 1/2
	SDM515A	.036" x .215"	1/4	.234	3 1/2
	SDM516A	.038" x .250"	1/4	.234	3 1/2
	SDM517A	.042" x .275"	1/4	.234	3 1/2
	SDM518A	.046" x .312"	1/4	.234	3 1/2
	SDM519A	.050" x .360"	1/4	.234	3 1/2
	SDM614	.034" x .187"	1/4	.187	6
	SDM616	.038" x .250"	1/4	.234	6

SDM361IA

Phillips ACR® Installer Bits

Stock No.	#		A	B
SDM361IA	#1	1/4	.187	1 15/16
SDM362IA	#2	1/4	.234	1 15/16
SDM363IA	#3	1/4	.234	1 15/16

SDM361RA

Phillips ACR Removal Bits

Stock No.	#		A	B
SDM361RA	#1	1/4	.187	1 15/16
SDM362RA	#2	1/4	.234	1 15/16
SDM363RA	#3	1/4	.234	1 15/16

TORX®

	Stock No.	#		A	B
TORX	SDMT307A	T7	1/4	.140	1 15/16
	SDMT308A	T8	1/4	.140	1 15/16
	SDMT309A	T9	1/4	.140	1 15/16
	SDMT310A	T10	1/4	.140	1 15/16
	SDMT315A	T15	1/4	.140	1 15/16
	SDMT320A	T20	1/4	.203	1 15/16
	SDMT325B	T25	1/4	.203	1 15/16
	SDMT327A	T27	1/4	.203	1 15/16
	SDMT330A	T30	1/4	.250	1 15/16
	SDMT340A	T40	1/4	.250	1 15/16
	SDMT407	T7	1/4	.140	2 3/4
	SDMT408	T8	1/4	.140	2 3/4
	SDMT409	T9	1/4	.140	2 3/4
	SDMT410	T10	1/4	.140	2 3/4
	SDMT415	T15	1/4	.140	2 3/4
	SDMT420	T20	1/4	.203	2 3/4
	SDMT425	T25	1/4	.203	2 3/4
	SDMT427	T27	1/4	.203	2 3/4
	SDMT430	T30	1/4	.250	2 3/4
	SDMT440	T40	1/4	.250	2 3/4
	SDMT507	T7	1/4	.140	3 1/2
	SDMT508	T8	1/4	.140	3 1/2
	SDMT509	T9	1/4	.140	3 1/2
	SDMT510	T10	1/4	.140	3 1/2
	SDMT515	T15	1/4	.140	3 1/2
	SDMT520	T20	1/4	.203	3 1/2
	SDMT525	T25	1/4	.203	3 1/2
	SDMT527	T27	1/4	.203	3 1/2
	SDMT530	T30	1/4	.250	3 1/2
	SDMT540	T40	1/4	.250	3 1/2
	SDMT607	T7	1/4	.140	6
	SDMT608	T8	1/4	.140	6
	SDMT609	T9	1/4	.140	6
	SDMT610	T10	1/4	.156	6
	SDMT615	T15	1/4	.156	6
	SDMT620	T20	1/4	.187	6
	SDMT625	T25	1/4	.234	6
	SDMT627	T27	1/4	.250	6
	SDMT630	T30	1/4	.250	6
	SDMT640	T40	1/4	.250	6



SDM351B

Pozidriv®, inches

Stock No.	#		A	B
SDM351B	#1	1/4	.187	1 15/16
SDM352B	#2	1/4	.234	1 15/16
SDM353B	#3	1/4	.234	1 15/16
SDM451A	#1	1/4	.187	2 3/4
SDM452A	#2	1/4	.234	2 3/4
SDM453A	#3	1/4	.234	2 3/4
SDM551A	#1	1/4	.187	3 1/2
SDM552A	#2	1/4	.234	3 1/2
SDM553A	#3	1/4	.234	3 1/2
SDM651A	#1	1/4	.187	6
SDM652A	#2	1/4	.234	6
SDM653A	#3	1/4	.234	6

SDMTR325

Tamper-Resistant TORX®

Stock No.	#	Length, inches
SDMTR308	T8	1 15/16
SDMTR310	T10	1 15/16
SDMTR315	T15	1 15/16
SDMTR320	T20	1 15/16
SDMTR325	T25	1 15/16
SDMTR327	T27	1 15/16
SDMTR330	T30	1 15/16

SDMTS302

Square

Stock No.	#	Length, inches
SDMTS301	#1	1 15/16
SDMTS302	#2	1 15/16
SDMTS601	#1	6
SDMTS602	#2	6

SDMM3702

Hex, mm

Stock No.	mm	A	B
SDMM3702	2	.09	1 15/16
SDMM37025	2.5	.11	1 15/16
SDMM3703	3	.13	1 15/16
SDMM3704	4	.18	1 15/16
SDMM3705	5	.22	1 15/16
SDMM3706	6	.27	1 15/16
SDMM3707	7	.31	1 15/16
SDMM3708	8	.36	1 15/16
SDMM3710	10	.45	1 15/16

SDM3704

Hex, inches

Stock No.	#		A	B
SDM3704	1/16	1/4	.115	1 15/16
SDM3705	5/64	1/4	.234	1 15/16
SDM3706	3/32	1/4	.234	1 15/16
SDM3707	7/64	1/4	.234	1 15/16
SDM3708	1/8	1/4	.234	1 15/16
SDM3709	9/64	1/4	.234	1 15/16
SDM3710	5/32	1/4	.234	1 15/16
SDM3712	3/16	1/4	.234	1 15/16
SDM3714	7/32	1/4	.250	1 15/16
SDM3716	1/4	1/4	.250	1 15/16
SDMA4708	1/8	5/16	.234	3
SDMA4710	5/32	5/16	.234	3
SDMA4712	3/16	5/16	.234	3
SDMA4714	7/32	5/16	.281	3
SDMA4716	1/4	5/16	.281	3
SDMA4720	5/16	5/16	.312	3
SDMA4724	3/8	5/16	.312	3

⚠WARNING

- Do not use bits with impact drivers
- Read safety precautions on pages W1 to W4

AWLS, HOOKS AND PICKS

SGASA104BR

Awls and Hooks/Soft Grip

- Use for scribing, alignment, O-ring removal, piercing holes in leather or fabric and cleaning crevices

Red	Description	Blade Length, inches	Overall Length, inches	Set Contains: SGASA104BR Red
SG4ASABR	Awl	3 3/4	8	•
SG4ASHBR	Hook Tool	3 3/4	8	•
SG5ASABR	Awl	4 3/4	9 5/8	•
SG7ASABR	Awl	5	10 5/8	•

Set includes storage tray.

SGASA204AO

Miniature Awls, Hooks and Picks/Soft Grip

- Use for scribing, alignment, O-ring removal, piercing holes in leather or fabric and cleaning crevices
- 3 1/8" blade length, 6" long

Red	Orange	Green	Description	Set Contains: SGASA204A Red	SGASA204AO Orange	SGASA204AG Green
SG3ASABR	SG3ASABO	SG3ASABG	Mini-Awl	•	•	•
SG3ASHBR	SG3ASHBO	SG3ASHBG	Mini-Hook	•	•	•
SG3ASH45BR	SG3ASH45BO	SG3ASH45BG	Mini-Pick, 45° tip	•	•	•
SG3ASH90BR	SG3ASH90BO	SG3ASH90BG	Mini-Pick, 90° tip	•	•	•

Sets include storage tray.



SGLASA204G

Hard Grip Handle Colors

Red	Orange	Green
R	O	G

ADD SUFFIX TO STOCK NUMBER FOR SPECIAL COLORS

Long Small Size Awls, Hooks and Picks/Soft Grip

- Use for scribing, alignment, O-ring removal, piercing holes in leather or fabric and cleaning crevices
- Blade length 8", 9 23/32" overall length

Red	Orange	Green	Description	Set Contains: SGLASA204A Red	SGLASA204AO Orange	SGLASA204AG Green
SGL3ASABR	SGL3ASABO	SGL3ASABG	Long Mini-Awl	•	•	•
SGL3ASHBR	SGL3ASHBO	SGL3ASHBG	Long Mini-Hook	•	•	•
SGL3ASH45BR	SGL3ASH45BO	SGL3ASH45BG	Long Mini-Pick, 45° tip	•	•	•
SGL3ASH90BR	SGL3ASH90BO	SGL3ASH90BG	Long Mini-Pick, 90° tip	•	•	•

Set includes storage tray.

SGSR104AR

Hard Grip Handle Colors

Red	Orange	Green
R	O	G

ADD SUFFIX TO STOCK NUMBER FOR SPECIAL COLORS

SH6ASA

Awl/Hard Grip

Stock No.	Blade Length, inches	Overall Length, inches
SH6ASA	4 3/4	6 5/8

Seal Removal Tools/Soft Grip

Red	Green	Orange	Tip Style	Blade Length, inches	Overall Length, inches	Set Contains: SGSR104AR Red	SGSR104AO Orange	SGSR104AG Green
SGSR1AR	SGSR1AG	SGSR1AO	Spoon	5 1/4	8	•	•	•
SGSR2AR	SGSR2AG	SGSR2AO	Spoon	2 1/2	5 11/32	•	•	•
SGSR3AR	SGSR3AG	SGSR3AO	Contoured	2 1/2	5 11/32	•	•	•
SGSR4AR	SGSR4AG	SGSR4AO	Contoured	5 1/4	8	•	•	•

PSLR6

PSLR4LT

Picks and Scribes/Extra Long (Blue-Point®)

- Use to separate wires, remove small fuses and O-rings, retrieve washers and/or to mark metal or plastic surfaces
- Heavy duty shank diameter is 0.02" thicker than standard picks for added durability and extended tool life
- Each pick is 9 3/4" (247.7 mm) long

Stock No.	Description	Set Contains: PSLR4	PSLR6
PSLR4-1	Hook Pick	•	•
PSLR4-2	90° Hook Pick	•	•
PSLR4-3	Straight Pick	•	•
PSLR4-4	Complex Pick	•	•
PSLR4-5	Combination Pick		•
PSLR4-6	Double Angle Pick		•

Sets include vinyl storage pouch

Picks and Scribes/Extra Long/Lighted (*Blue-Point*)

- LED lighted hook and pick set allows easier viewing in dark and hard-to-reach areas
- Made of durable carbon heat-treated steel
- Ergonomic soft grip contoured handle
- Each pick measures 9 3/4" long (247.7 mm)
- Push button LED switch on end of handle
- Each pick requires three LR41 batteries (included). Replacement battery P/N RSND384392PK (one battery)

Stock No.	Description	Set Contains: PSLR4LT
PSLR4LT-1	Hook Pick	•
PSLR4LT-2	90° Hook Pick	•
PSLR4LT-3	Straight Pick	•
PSLR4LT-4	Complex Pick	•

Picks and Scribes/Interchangeable

- Quick-change collet allows picks and hooks to be interchanged fast and without tools
- Six LEDs illuminate dark work areas
- Black oxide finish protects the strong chrome-vanadium steel shafts
- Includes PSLRQC4LT-1 – PSLRQC4LT-4 picks/hooks, durable roll-up nylon pouch and three AAA batteries

PSLRQC4LT

Stock No.	Description	Set Contains: PSLRQC4LT
PSLRQC4LT-1	Straight Pick	•
PSLRQC4LT-2	Complex Pick	•
PSLRQC4LT-3	90° Pick	•
PSLRQC4LT-4	Hook Pick	•

YA145

YA149

YA339

YA338

Picks and Scribes (*Blue-Point*)

Stock No.	Description	Overall Length, inches (assembled to handle)	Set Contains: YA145	YA149
YA145-1	Straight Tip Pick	7.26	•	
YA145-2	O-Ring, 90° Tip Pick	7.20	•	
YA145-3	Hook Tip Pick	7.30	•	
YA145-4	Angle Tip Pick	7.34	•	
YA149-1	Straight Pointed Pick	—		•
YA149-2	Curved With 90° Point Pick	—		•
YA149-3	45° with Flat Tip Pick	—		•
YA149-4	90° Pointed Pick	—		•
YA149-5	Double Ended Short Pick	—		•
YA149-6	Double Ended Long Curve Pick	—		•
YA149-7	Half Circle Pointed Pick	—		•

YA338 Scribe

- One straight end, one hooked end for picking O-rings and small parts

YA339 Scribe

- One straight end and one 90° angle end for detail work around small objects

PRYBARS

PPN300

Prying/Smoothing Tools

- Intended for spreading/smoothing epoxy, adhesives and silicone uniformly
- Other uses include: cleaning small parts, removing/installing O-rings and gaskets, prying dashboard parts and vents, and prying apart electronic key fobs to access the battery for replacement

Stock No.	Length, inches	Tip Profile	Set Contains: PPN300
PPN1030	7	Narrow	•
PPN2040	7	Medium	•
PPN4050	7	Wide	•

PBFG415

PBFG415 Fiberglass Prybar

- Drop forged rust -resistant, hardened steel wedge end is chemically bonded to fiberglass handle
- 50,000 strands of fiberglass are sleeved by a polypropylene jacket for comfort and variable hand placement during use
- About one-half the weight of a steel prybar of the same length and less flexible than a steel prybar for greater leverage
- Polypropylene sleeve is resistant to heat and cold for greater comfort in all temperatures

SPBH48R

Heavy Duty/Striking Crown Handle

- Durable crown handle offers protection from off center hammer strikes
- Handle is 10 3/8" long for a comfortable, secure grip (long handle ensures that two hands can fit for high leverage applications)
- Cylindrical design with taper allows user to find a comfortable grip regardless of hand size
- 3/4" square bar manufactured from special alloy steel, precision forged and heat treated for optimum strength and durability
- High leverage flared tip (1 1/8") with precision ground edge
- Handle resists extreme temperatures

Stock No.	Handle Color	Square Shank, inches	Tip Width, inches	Length, inches
SPBH30R	Red	3/4	1 1/8	30
SPBH30G	Green	3/4	1 1/8	30
SPBH30O	Orange	3/4	1 1/8	30
SPBH48R	Red	3/4	1 1/8	48
SPBH48O	Orange	3/4	1 1/8	48
SPBH48G	Green	3/4	1 1/8	48
SPBH54R	Red	3/4	1 1/8	54
SPBH54O	Orange	3/4	1 1/8	54
SPBH54G	Green	3/4	1 1/8	54

SPBS704R

Standard Duty/Striking Handle

- Ergonomic shape and contour handle matched to blade length for optimum leverage
- Blade extends through handle and makes contact with end cap to provide solid striking force
- Metal end cap allows hammer striking while reducing chance of damage to handle
- High leverage design with smooth radius head provides maximum leverage when lifting and pulling back
- Blade manufactured from special alloy steel, precision forged and heat treated for strength and durability
- Industrial finish to protect against corrosion

Black	Red	Orange	Green	Square Shank, inches	Tip Width, inches	Length, inches	Set Contains: SPBS704	SPBS704R	SPBS704O	SPBS704G
SPBS8	SPBS8R	SPBS8O	SPBS8G	1/4	7/16	8	•	•	•	•
SPBS12	SPBS12R	SPBS12O	SPBS12G	3/8	5/8	12	•	•	•	•
SPBS18	SPBS18R	SPBS18O	SPBS18G	7/16	23/32	18	•	•	•	•
SPBS24	SPBS24R	SPBS24O	SPBS24G	7/16	13/16	24	•	•	•	•
SPBS36	SPBS36R	SPBS36O	SPBS36G	5/8	1 1/8	36 5/8				
–	SPBS42R	SPBS42O	–	5/8	1 1/8	42 1/4				

Demolition Chisels/Crown Handle

- Exclusive crown handle offers protection from off-center hammer strikes
- Handle provides a comfortable secure grip in a variety of environments
- Engineered composite handle offers excellent temperature resistance and bar retention

Stock No.	Handle Color	Hex Shank, inches	Tip Width, inches	Length, inches
SPDC18R	Red	3/4	1 1/8 Double Edge	18
SPDC18G	Green	3/4	1 1/8 Double Edge	18
SPDC18O	Orange	1	1 1/8 Double Edge	18

SPDC18R

Striking/40° Offset Blade

Stock No.	Handle Length, inches	Exposed Bar Length, inches	Square Shank, inches	Tip Width, inches	Tip Type
MPBS1140O	5 1/2	5 1/2	3/8	3/8	Straight

MPBS1140O Prybar/Brake Tool

- Strong 3/8" square alloy steel bar with straight tip
- 11" total length with 40° offset ensures access into tight wheel wells
- Large, comfortable, high-visibility orange handle with striker cap allows good grip versus small, hard-to-hold brake adjustment tools
- Ideal for general prybar applications

MPBS1140O

Striking/Straight Blade

Stock No.	Square Shank, inches	Tip Width, inches	Length, inches	Set Contains: MPBS703
MPBS12	3/8	5/8	12	•
MPBS24	7/16	13/16	24	•
MPBS36	5/8	1 1/8	36 5/8	•

MPBS703

Multi-Position

- Each prybar features 17 incremental angles of 15° to provide great flexibility
- High-leverage design with smooth radius head provides maximum leverage when lifting
- Manufactured from special alloy steel, precision-forged and heat-treated for strength and durability
- Industrial finish helps protect against corrosion

Stock No.	Tip Width, inches	Length, inches	Set Contains: PBMP703A
PBMP8A	1/2	8	•
PBMP12A	5/8	12	•
PBMP16A	5/8	16	•
PBMP24A	1	24	
PBMP36A	1	36	

PBMP703A

Non-marring Prybars

- Made from tough, reinforced nylon
- Ideal for removing clips, fasteners, molding or gaskets from interior/exterior applications
- Will not damage delicate surfaces unlike metal removal tools
- Lightweight and resistant to most automotive fluids
- Block end allows use with hammer

Stock No.	Length	Tip Width	Tip Profile	Set Contains: PBN500
PBN1	6 3/4	5/8	Narrow Wedge	•
PBN2	6 3/4	15/16	Wide Wedge	•
PBN3	6 3/4	7/8	Narrow Fork	•
PBN5	6 3/4	1 3/16	Wide Fork	•
PBN7	6 3/4	1 3/8	Flat Fork	•

PBN500

PBN1

WARNING • Read safety precautions on pages W1 to W4

PRYBARS

PBHG48

PBHC48

NPB124B

PBS704

3260B

7030A

2430C


BLPPB704

Heavy Duty

- Bars feature a rubber grip that eliminates contact with rust and damaged surfaces and protects the bar from damage during transit
- Grip offers a non-slip surface that provides a secure gripping surface/ leverage, when hands are wet, sweaty or oil covered

Stock No.	Tip Style	Weight, lb	Radius Curves, inches	Length, inches	Diameter, inches
PBHG48	1 1/2" Offset Chisel, 2 1/4" Offset Claw	9.5	5 1/8	48	1" Hex
PBHC48	1 1/8" Straight Chisel, 2" Offset Chisel	11.25	—	48	1" Hex
PBHC60	1 1/8" Straight Chisel, 2" Offset Chisel	14.25	—	60	1" Hex

PBHC1 - 48" Replaceable rubber grip.

Wrecking Bar (Blue-Point®)

- Slotted claw on "gooseneck" end and a chisel configuration on opposite end

Stock No.	Sq. Stock, inches	Length, inches
NPB124B	3/4	24

Prybars

- "Rolling head" acts as fulcrum and provides leverage
- Pointed end is useful in many aligning applications

Stock No.	Sq. Stock, inches	Length, inches	Set Contains: PBS704
650	5/16	6	•
1250	7/16	12	•
1650	9/16	16	•
2050	11/16	20	•

Slate Bar (*Blue-Point*)

Stock No.	Sq. Stock, inches	Edge, inches	Length, inches
3260B	1	1/2	60

Close Quarter Bars (*Blue-Point*)

- Powerful leverage where space is at a premium
- Ideal for aligning molds

Stock No.	Sq. Stock, inches	Tip Width, inches	Length, inches
7030A	3/8	7/16	9
7031A	1/2	9/16	16
7032	5/8	3/4	18

Pinch Bars (*Blue-Point*)

- Pinch bar has a tapered point on one end and a chisel type edge on the other

Stock No.	Sq. Stock, inches	Edge, inches	Length, inches
1412A	1/2	5/8	14
1658C	1/2	5/8	16
2420A	3/4	15/16	20
2430C	3/4	5/8	30
2438C	3/4	7/8	38
2842C	7/8	1	42

BLPPB704 Prybar Set
Includes 1412A (14") and 2420A (20") Pinch Bars, 7031A Close Quarter Bar (16") plus BPPC1878 Flat Chisel (18")

Die Setter Bars (*Blue-Point*)

- Designed for separating, scraping or prying

Stock No.	Sq. Stock, inches	Tip Width, inches	Length, inches
7035	5/8	7/16	18
7037	3/4	9/16	30

Utility Bars (*Blue-Point*)

UB222PK Miniature Utility Bar
• 5 3/8" length • Pack of ten

7035

UB222PK

Prybar Rack

KR294AAPV
Hang-On Prybar Rack

- Hang up to four prybars or long tools with handles
- Notched angle plate keeps tools from shifting
- Suspend from roll cab or tool chest with 1/4" or more lip

KR294AAPV

GRIP OR CUT. ALWAYS A CUT ABOVE.

All Snap-on® pliers and cutters undergo a precision manufacturing process to provide the quality and performance the job demands.

Alloy Steel — Every set of pliers and cutters is made with our special alloy steel.

Cold-Forged Process — Increased strength from top to bottom.

Joints — Positioned close to the cutting edge, making it much easier to cut heavy wire with less user fatigue.

TALON GRIP™ SERIES

Diamond serrated jaws provide a better grip and increased pulling power.

Ramped tips provide stronger jaws and increased accessibility.

Longer contoured handle with new joint location provides higher leverage and increased comfort.

Rounded jaw edges minimize nicks to wires when making loops or bends.

VECTOREDGE™ BLADE TECHNOLOGY

Parallel blades designed to ensure full, clean cuts of all materials – from fine wire and cable ties, to hardened music wire and spring steel, at all locations along the cutting edges.

Precision machining delivers superior edge properties and performance producing hassle-free cuts of smaller soft materials and wire.

VectorEdge pliers employ a high-leverage design by positioning the joint closer to the blades.

After thousands of cuts through hardened music wire, cutting edges remain aligned and still provide clean and easy cuts.

PLIERS/CUTTERS SETS

PL300CF

PLR300

PL400B

102LHCP

Pliers and Cutters Sets

Stock No.	Description	PL300CF	PLR300	PL400B	102LHCP	Talon Grip™	Long Reach
	Set Contains:						
96ACF	Needle Nose Pliers	•		•		•	
97CF	Needle Nose Pliers, 8”		•				
915CP	Needle Nose Pliers				•		•
415CP	Needle Nose Pliers, 35° Bent Nose				•		•
47CF	Combination Slip Joint Pliers	•		•		•	
91ACP	Adjustable Joint Pliers			•			
57AHLP	Lineman’s Pliers		•				
86CF	Diagonal Cutters		•				
87ACF	Diagonal Cutters						

See product details on following pages

Sets include storage tray



Standard Diagonal Cutters

- Quality forged steel ensures tools that will provide years of service
- Differential heat treatment produces the strength and toughness in desired areas to withstand repeated tough cutting jobs
- Handles are designed for comfort and to deliver leverage needed to tackle demanding jobs

	Stock No.	Description	Handle Style (A)	Jaw Length, inches (B)	Length, inches (C)
Standard Diagonal	184CF	Diagonal Cutters	Bowed	13/32	4 3/4
	85CF	Cutter	Bowed	9/16	5
	86EP	Pistol Grip Cutter	Pistol	3/4	6 5/16
	86CF	Diagonal Cutters	Bowed	3/4	6 5/16
	87ACF	Diagonal Cutters	Bowed	13/16	7 3/8

85CF

86CF

86EP

87ACF

Diagonal Cutters

- Ergonomic contour cushion grip handle provides up to 22% increased cutting leverage for superior comfort and control
- Induction hardened, precision sharpened, offset cutting edges produce a shearing cut (not a pinching cut) to stay sharp longer and cut with less effort
- Differential heat treatment produces strength and toughness

	Stock No.	Description	Handle Style (A)	Jaw Length, inches (B)	Lenght, inches (C)
High Leverage Diagonal	388CF	High Leverage Cutter	Bowed	1 1/16	8 5/16
Diagonal Cutters	312CP	High Leverage Cutter	Long Handle	1 1/8	11
	808ACP	Mini	Bowed	9/16	6 15/16

388CF

312CP

808ACP

312CP Heavy Duty Diagonal Cutter

- 11" length provides maximum reach and access
- Offset jaws easily make flush cuts
- Offset cutting edge produces a shearing cut (not a pinching cut) to stay sharp longer and cut with less effort
- Bowed nonslip handle design for increased leverage and comfort

Special Purpose Cutter

- Manufactured from 1% carbon/chrome ball bearing steel to provide strength without brittleness
- Adjustable screw joint minimizes friction and maximizes cutting edge alignment
- Precision hardened cutting edge provides superior durability
- Unique jaw design of the EPC160 makes it ideal for cutting plastic, rubber and vinyl



Stock No.	Description	Length, inches (A)	Cutting Edge Length, inches (B)	Jaw Width, inches (C)	Jaw Thickness, inches (D)	Tip Width, inches (F)
EPC160	Plastic and Cable Cutter	6.3	0.7	0.85	0.39	0.059

EPC160

WARNING

- Plastic coated handles on these pliers and cutters do not protect against electric shock
- Read safety precautions on pages W1 to W4

NEEDLE NOSE/LONG/SPECIAL PURPOSE



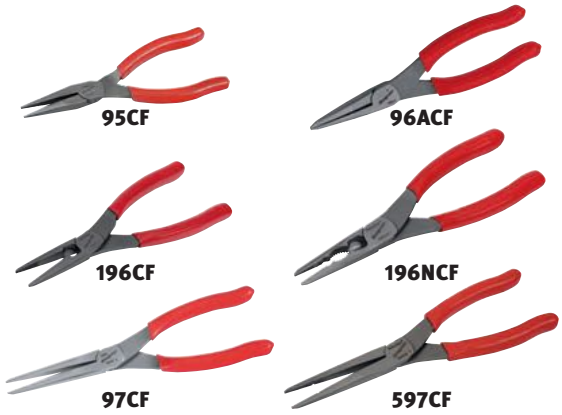

Needle Nose Pliers

- Rounded jaw edges minimize nicks to wire when making loops or bends
- Jaw tips are perfectly aligned and feature machined teeth for precise gripping strength with positive control

Stock No.	Description	B	C	Set Contains: Talon Grip™
95CF	Needle Nose	1 11/16	6	
96ACF	Needle Nose Pliers	2 1/4	8	•
196CF*	Long Needle Nose	2 1/4	8	•
196NCF*	Long Needle Nose	2 1/4	8	•
97CF	Needle Nose Pliers, 8"	3 3/16	9	
597CF**	Pin Gripping	3 3/16	9	

*Rated to cut .049" diameter music wire
**Jaws feature matched parallel and cross grooves

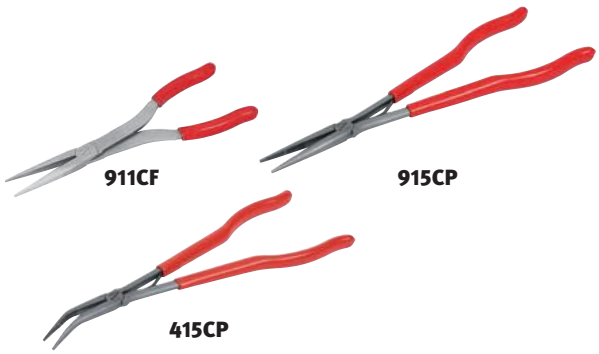

Long Reach Pliers

- Long, slim jaws and flush riveted joints for increased reach into recessed areas
- Ideal for electric and electronic work, holding pins or small components

Stock No.	Description	B	C
911CF	Needle Nose Pliers	3 3/16	11
915CP	Needle Nose Pliers	3 1/2	14 1/2
415CP	Needle Nose Pliers, 35° Bent Nose	2 7/8	14 5/16
411CF	35° Bent	2 7/8	10 7/8

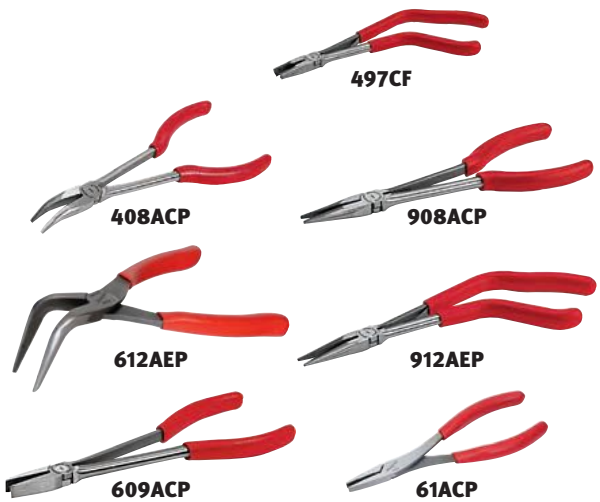

Special Purpose Pliers

- Bent Nose Pliers – Angled jaws for better access to hard-to-reach areas
- Pistol Grip – Angled handle for access to hard-to-reach areas
- Duck Bill – Specially designed for electronics work

	Stock No.	Description	B	C
Bent	497CF	90° Angle Jaws	3 3/16	7 1/4
	490CF	90° Bent	1 7/8	9 3/4
	408ACP	35° Mini Bent	1 1/2	7 7/8
Straight	908ACP	Mini	1 5/8	8 1/8
Pistol Grip	612AEP	Pistol Grip	1 3/8	9 3/4
	912AEP	Pistol Grip	2 1/8	10 5/8
Duck Bill	609ACP	3/8" Jaw Width	1 3/8	9 1/4
	61ACP	15/32" Jaw Width	1 5/16	7 3/4

COMBINATION/SLIP JOINT

Combination Slip Joint Pliers



- Slip joints for adjustable jaw width

Stock No.	Description	Length, inches (A)	Jaw Thickness, inches (B)	Talon Grip™	Shear Cutter
44CF	Combination Slip Joint	4 1/2	15/64		
46CF	Combination Slip Joint	6 7/16	23/64		
47CF*	Combination Slip Joint	8 1/4	7/16	•	
49CF	Combination Slip Joint	9 1/4	1/2		
137CF*	Heavy Duty Combination Slip Joint	8 3/16	27/64	•	•

*Third position gives a wider jaw spread for tough-to-get-ahold-of jobs

44CF

47CF

137CF

Special Purpose Pliers

- High Leverage Combination Pliers require 1/4 the effort normally needed for cutting/gripping
- Midget Pliers with serrated jaws are ideal for extremely small work

Stock No.	Description	Length, inches (A)	Jaw Thickness, inches (B)
HL138ACP	High Leverage Combination	7 7/8	1 1/16
5ACP	Midget Pliers	4 3/4	1/4

HL138ACP

5ACP

LINEMAN'S

Lineman's Pliers



- Machined cutter heads for perfectly matched blades
- Induction hardened head for extra strength and durability
- Gripper teeth behind the head can be a useful crushing area

Stock No.	Description	Length, Inches (A)	Jaw Thickness, inches (B)
57AHLP	Lineman's Pliers	7 3/8	1/2
59AHLP	Lineman's Pliers	9 1/4	1/2

57AHLP

ADJUSTABLE JOINT

AWP404


CHN410

Tongue and Groove Pliers

- Special tongue and groove design assures non-slip jaw action
- Unique fastener system inhibits side-to-side jaw wobble for added strength and smoother operation

Stock No.	Description	A	B	C	AWP404 Set Contains:
AWP45	Straight Serrated Jaws	3	1/2	4 3/4	•
AWP65	Straight Serrated Jaws	5	7/8	7	•
AWP120	Straight Serrated Jaws	7	2 3/16	12 3/4	•
AWP160	Adjustable Joint, Tongue & Groove Pliers	8	3 13/16	16 3/4	•
CHN410*	Parrot Jaws	5	1 1/2	10 1/8	

*Blue-Point®

Set shown includes storage tray

91ACP

Standard Pliers

- Specially hardened jaw teeth provide long life and a solid grip on work objects
- Vinyl covered handles for a secure, comfortable grip

Stock No.	Description	A	B	C
91ACP	Adjustable Joint Pliers	5	1 3/8	9 1/4

⚠WARNING

- Plastic coated handle s on these pliers and cutters do not protect against electric shock
- Read safety precautions on pages W1 to W4

LOCKING PLIERS

LP404

LP5SLIM

LP7SLIM

LP6LN

LP10WR

LP10GRV

BLP7

BLP404

BSGLP6LN

BSGLP404

A "V" groove houses round objects, preventing lateral movement.



LP Series

- Spring loaded release lever allows quick "no-pinch" release
- Locking nut secures jaw opening for repeat jobs
- Larger jaw capacity to hold larger objects
- Jaws feature greater surface area and broader teeth for more secure gripping

Stock No.	Description	Jaw Capacity, inches (A)	Length, inches (B)	Set Contains: LP404
LP5SLIM	Thin Curved Jaw	1 5/32	5	
LP7SLIM	Thin Curved Jaw	1 5/8	7	
LP5WR	Curved Jaw w/cutter	1 5/32	5	•
LP6LN	Long Nose	2 1/8	6	•
LP7WR	Curved Jaw w/cutter	1 5/8	7	•
LP10WR	Curved Jaw w/cutter	2 7/16	10	•
LP7R	Straight Jaw	1 5/8	7	
LP10R	Straight Jaw	2 7/16	10	
LP10LN	Long Nose	2 3/4	10	
LP10GRV	10" Grooved Joint Locking Pliers	1 5/8	10	

LP5SLIM, LP7SLIM Locking Pliers

- Use for removal of socket style sway bar links
- Thinner jaws fit between stabilizer bar and stabilizer link to allow a socket to be used for nut removal
- **LP7SLIM Applications:** 2002–2004 Dodge® Caravans, Chrysler® Town and Country and any other vehicles with non-greaseable sway bar links

LP10GRV Grooved Jaw Locking Pliers

- Longitudinal V groove section provides three points of contact preventing lateral movement while working
- Specially tapered groove means the larger the work piece, the larger the groove section that holds it
- Convex tooth section of mobile jaw pushes flat work pieces against the large, flat fixed jaw for tighter clamping
- Recessed area of mobile jaw allows angled objects to be held and clears small obstacles
- Serrated milled teeth provide a positive grip on different shaped objects

Locking Pliers (Blue-Point®)

- Made from high grade, heat-treated steel alloys, the hardened precision ground jaws "lock" onto work pieces that are tough to hold
- Adjusting screws ensure fine adjustments for precise gripping
- Soft grip series improves comfort while resisting damage from oil and grease

Stock No.	Description	Grip Style	Jaw Capacity, inches (A)	Length, inches (B)	Set Contains: BLP404	BSGLP404
BLP5	Curved Jaw	Standard	1.125	5	•	
BLP7	Curved Jaw	Standard	1.625	7	•	
BLP10	Curved Jaw	Standard	1.875	10	•	
BLP6LN	Long Nose	Standard	2.25	6	•	
BSGLP5	Curved Jaw	Soft	1.125	5		•
BSGLP7	Curved Jaw	Soft	1.625	7		•
BSGLP10	Curved Jaw	Soft	1.875	10		•
BSGLP6LN	Long Nose	Soft	2.25	6		•

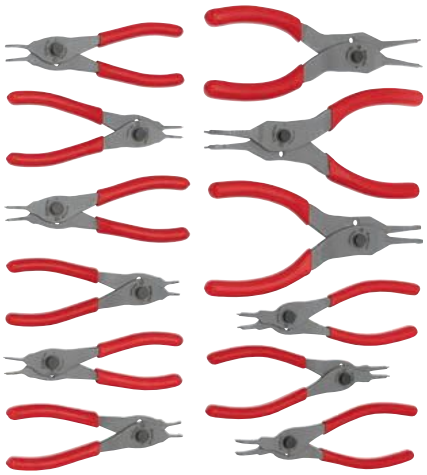

SRPC112

SRPC3845

SRPC4700

SRPC3890

Fixed Tip/Convertible, Forged Pliers

- Longer 45° and 90° jaws make it easier to access hard to reach retaining rings
- Pivot screw converts pliers from internal to external
- Wide cushion grip provides more comfort and control

Stock No.	Length, inches	Ring Size Range, inches	Jaw Angle	Tip Diameter, inches	Set Contains: SRPC112	SRPC107	SRPC105
SRPC3800	6 7/16	1/8–1	0°	.038	•	•	•
SRPC4700	6 7/16	3/16–1 3/8	0°	.047	•	•	•
SRPC7000	7 7/16	7/16–2	0°	.070	•	•	•
SRPC9000A	8 3/4	1 1/2–3 1/2	0°	.090	•		
SRPC3845	6 7/16	1/8–1	45°	.038	•		
SRPC4745	6 7/16	3/16–1 3/8	45°	.047	•		
SRPC7045	7 7/16	7/16–2	45°	.070	•	•	
SRPC9045A	8 3/4	1 1/2–3 1/2	45°	.090	•	•	
SRPC3890	6 7/16	1/8–1	90°	.038	•		•
SRPC4790	6 1/2	3/16–1 3/8	90°	.047	•		
SRPC7090	7 1/2	7/16–2	90°	.070	•	•	•
SRPC9090A	8 3/4	1 1/2–3 1/2	90°	.090	•	•	

ASME®/ANSI® B107.500

Sets shown include storage tray

PRH406

Fixed Tip/Convertible Pliers

Unique dial feature eliminates the need to take apart pliers when changing from internal to external.

Stock No.	Length, inches	Ring Size Range, inches	Jaw Angle	Tip Dianmeter, inches	Set Contains: PRH406
PRH12	5 3/4	1/8–1	18°	.038	•
PRH32	6	5/16–1 3/8	18°	.047	•
PRH34	7 1/2	7/16–2	18°	.070	•
PRH129	5 3/4	1/8–1	90°	.038	•
PRH329	5 7/8	5/16–1 3/8	90°	.047	•
PRH349	7 1/2	7/16–2	90°	.070	•

ASME/ANSI B107.500

Sets shown include storage tray

⚠WARNING

- Plastic coated handles on these pliers and cutters do not protect against electric shock
- Read safety precautions on pages W1 to W4

RETAINING RING Blue-Point®

PRH57A

PR7A

PR8A

PR36

PRH502A

PR54

PRH503

PR50A

PR215

Interchangeable Tip/Convertible Pliers

Internal	External	Length, inches	Ring Size Range, inches	Tip Kit Included	Tip Sizes Included Inches/Degree	Optional Kits	Optional Tip Sizes	Set Contains: PR36	PRH502A	PRH503	PR50A	PR215
PR37	–	6 1/4	3/8–2	**PR5 (For PR36 only)**	2 pair each in PR36 set: .047" 0°, .070" 0°, .047" 45°, .038" 90°	**PR5**	.047" 0°, .070" 0°, .047" 45°, .038" 90°	•				
–	**PR38**	6 1/4	1/4–2	–	—	**PR5**	.047" 0°, .070" 0°, .047" 45°, .038" 90°	•				
PRH56A (Convertible)	–	6 3/8	Internal 1/4–1 External 1/8–1	**PRH56A-1**	1 pair each: .023" 0°, .036" 0°, .047" 0°, .036" 90°, .047" 90°	–	—		•	•		
PRH57A (Convertible)	–	8	Internal 3/8–2 External 1/4–2	**PRH57A-1**	1 pair each: .036" 0°, .047" 0°, .070" 0°, .036" 90 °, .047" 90°	–	—		•	•		
PRC65A (Convertible)	–	10	Internal 1 13/64–4 External 1 1/3–4	**PRC65A-1**	1 pair each: .090", .108", .120" (15° and 90°)	–	—			•		
PR51	–	9 1/2	2 7/16–4	**PR502**	.108", 15°	**PR501**	.108", 0°				•	
–	–	—	—	**PR503**	.108", 45°	**PR504**	.108", 90°					
–	**PR52**	9 1/2	1 1/2–3 11/32	**PR507**	.120", 45°	**PR505**	.120", 0°				•	
–	–	—	—	**PR508**	.120", 90°	**PR506**	.120", 15°					
PR7A	–	15 11/16	3 1/16–6 1/4	**PR7A-1**	.120", 0°	**PR7A-2**	.120", 45°					•
–	–	—	—	–	—	**PR7A-3**	.120" 90°					
–	**PR8A**	15 11/16	3 1/16–6 1/4	**PR7A-1**	.120", 0°	**PR7A-2**	.120", 45°					•
–	–	—	—	–	—	**PR7A-3**	.120" 90°					
PR54	–	29	6 1/2–10	**PR54-1**	.150", 0°	**PR54-2**	.150", 45°					
–	–	—	—	–	—	**PR54-3**	.150" 90°					
–	**PR53**	19	6 1/2–10	**PR53-1**	.170", 0°	**PR53-2**	.170", 45°					
–	–	—	—	–	—	**PR53-3**	.170" 90°					

PR36 Set includes PR5 tip kit. Individual PR37 and PR38 units do not include tips and require PR5 tip kit.
PR51 and PR52 work with tip kits PR501 – PR508
PRH503-1 Replacement Case for PRH503



Snap-on® manufactured pliers with plastisol or cushion grip handles meet the electrostatic discharge (ESD) specifications in MIL-B-81705C.

- Spring jaw opening
- Cutter models have a small hole at the base of the blades to relieve pressure on the cutting edges
- Innovative cushion grip handles result in a very comfortable, yet durable handle grip

E700BCG

E703BCG

E704BCG

E708BCG

E712BCG

E713BCG

E715BCG

E718BCG

E721BCG

E770BCG

E790BCG

E Series Pliers

Stock No.	Description	Jaw Length, inches (A)	Tip Width, inches (B)	Length, inches (C)
E700BCG	Round Wire Looper Jaws Taper from 3/16"–1/32"	1	1/16	6 1/8
E703BCG	Long Serrated Jaws	2 3/16	1/16	6 9/16
E704BCG	Angled (45°) Serrated Jaws	2 1/4	1/16	6 5/8
E708BCG	Short Non-Serrated Jaws	13/16	1/16	5 15/16
E712BCG	Serrated Jaw	1 11/16	1/16	6 1/8
E713BCG	Short Serrated Jaws	7/8	1/16	4 5/8
E715BCG	Extra Slim Serrated Jaws	1 3/16	1/16	5 1/8
E718BCG	Curved (90°) Serrated Jaws	1 1/8	1/16	5 9/16
E721BCG	Extra-Slim Non-Serrated Jaws	1 23/32	1/16	6 7/8
E770BCG	Needle Thin Serrated Jaws	1 1/8	1/32	5
E790BCG	Flat Nose Non-Serrated Jaws	1	1/16	6 1/8

Pliers in this chart use the E74X1 Coil Replacement Spring.

⚠WARNING

- Plastic coated handles on these pliers and cutters do not protect against electric shock
- Read safety precautions on pages W1 to W4

ELECTRONIC SERVICE CUTTERS



True Flush ground blades cut wire ends flat and allow protruding wire ends to be trimmed flush.

Semi Flush ground blades cut slightly pointed wire ends and can be used where an exact flush cut is not required.

Shear Cut ground blades (on standard cutters) are designed for general cutting with less hand pressure and extended blade life.

Head Shapes Always select a cutter with the largest head that will meet your requirement. The oval head design has more material behind the cutting edges and gives the longest tool life.

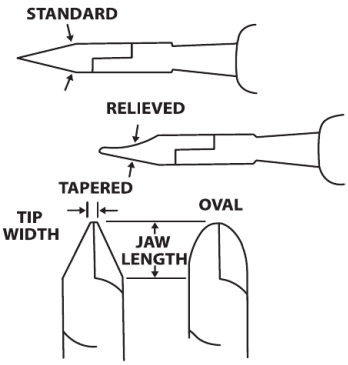

E706BCG

E707BCG

E709BCG

E710BCG

E711BCG

E719BCG

E740BCG

E742BCG

Cutters (E Series)

Stock No.	Cut	Head Style	Cutting Capacity	Tip Width, inches	Cutting Edge Length, inches	Length, inches
E706BCG	True Flush	End Cut	AWG #19	1/16	15/32	5 7/8
E707BCG	True Flush	Tapered	AWG #17	1/16	7/16	4 3/8
E709BCG	True Flush	Tapered	AWG #17	1/16	7/16	4 7/16
E710BCG*	True Flush	Tapered	AWG #16	3/32	11/16	5 3/16
E711BCG	Semi Flush	Tapered	AWG #12	3/16	7/16	5 3/4
E719BCG	True Flush	Tapered	AWG #17	1/16	7/16	6 3/8
E740BCG	Semi Flush	Oval	AWG #16	1/16	7/16	5 3/4
E742BCG	True Flush	Oval	AWG #16	1/16	7/16	5 3/4

These cutters use the E74X1 Replacement Spring
*E710BCG uses E71XL1 Replacement Spring, E710BCG also available as E710BCGCT Cushion Throat model

Crimpers



Stock No.	Description	Length, inches (A)	Crimps
29CF	Terminal Crimping Pliers with Cutter	9 3/8	10, 12, 14, 16, 18, 20, 22 AWG Insulated and Non-Insulated

29CF

29CF Cold Forged Wire Terminal Crimping Tool
- Cold formed heat treated rivet for smooth action and long life
- Precision machined joint and cutting edges, hardened wire cutter with "Knife to Anvil" design, never needs sharpening

Wire Stripper/Cutter/Crimper



Stock No.	Description	Length, inches (A)	Strips AWG Sizes
PWCS7CF	Wire Stripper/Cutter/Crimper	6 3/4	12, 14, 16, 18, 20
PWCS9	Wire Stripper/Cutter/Crimper/Bolt Cutter	8 3/4	AWG20 – 10 (stranded wire), AWG16 – 8 (solid wire)
PWCSS7CF	Wire Stripper/Cutter/Crimper	6 3/4	14 – 24 AWG

PWCS7CF

PWCS7CF Wire Stripper/Cutter/Crimper
- Unique smaller wire stripper/crimper that strips 12, 14, 16, 18 and 20 gauge insulated wire
- Crimps insulated and bare wire connectors
- Wire cutter in the jaw and handle
- Ideally suited for work in confined areas such as under dash or within electrical service enclosures

PWCS9A

PWCS9 Wire Stripper/Cutter/Crimper/Bolt Cutter
- Cold forged from special alloy steel and induction heat treated for superior performance and durability
- Bi-molded, soft grip handle provides comfort and helps reduce fatigue
- Pliers tip for grabbing or pulling wire
- Cuts #6 and #8 soft bolts
- Crimps both insulated and non-insulated terminals
- Includes shears in throat area for general cutting applications

PWCSS7CF

PWCSS7CF Wire Stripper/Crimper/Cutter (7")
- Cutting wire and crimping terminals for: speaker wire, wire for navigation and entertainment systems, data wires that connect to computers, body control modules, power windows and door locks, dash gauges and running lights for boats

WIRE TOOLS Blue-Point®

Crimpers



Stock No.	Description	Length, inches (A)	Crimps
PWC30	Terminal Crimping Pliers with Cutter	10 1/4	10, 12, 14, 16, 18, 20, 22 AWG Insulated and Non-Insulated
PWC47	Computer/Sensor Terminal Crimping Tool	8	Open barrel and Wether-Pac terminals 14 – 24 AWG

PWC30

PWC47

PWC34

Ratcheting Crimpers

PWC48 Ratcheting Crimper Kit
- Versatile quick change jaw system allows work on many kinds of terminals
- Exclusive patented quick installation for easy jaw change, no tools required
- Jaws are precision investment casting made of AISI 4140 alloy steel
- Easy adjustment for changing the pressure of the crimp

PWC48NJ Ratcheting Crimper
Ratcheting crimper without jaw set

PWC48-1 Crimping Jaw Set
Jaw Set A. Use on Insulated 10–22 connectors

PWC48-2 Crimping Jaw Set
Jaw Set B. Use on non-insulated 8–20 connectors

PWC48-3 Crimping Jaw Set
Jaw Set C. Use on Open Barrel 10–20 connectors

PWC48-4 Crimping Jaw Set
Jaw Set H. Use on Open Barrel D-Sub connectors

PWC48

Modular Connectors

PWC34 Crimping Tool
- Double compound action with ratchet control for almost effortless operation
- Use with insulated connectors on 10–22 gauge wire
- Easy, efficient, single-squeeze crimping of modular connectors

⚠WARNING

- Plastic coated handles on these pliers and cutters do not protect against electric shock
- Read safety precautions on pages W1 to W4

WIRE TOOLS Blue-Point®

PWC39

PWC80A

PWC52A

Miscellaneous Wire Tools

PWC39 Cable Slitter
- Slits and removes insulation on single or multiple conductor cables up to 1.25" OD
- Adjustable blade allows for varying insulation thickness up to .187"
- Lightweight, fiberglass reinforced nylon body
- Extra blade in handle. 5 1/4" long

PWC39-1 Replacement Blade
Replacement blade for PWC39

PWC80A Cable Cutter
- For cutting battery cables and other soft metal cables
- Vinyl covered handles
- 7 1/2" long

PWC52A Connector Pliers
- For gripping round and irregularly shaped objects such as cannon plugs or plated pipe
- Range is 3/4"–2 1/2"
- 9 3/4" long

PWC52A1 Vinyl Jaw Inserts
For PWC52A (set of two)

PWC52A2L Replaceable Hinge Bolt
For PWC52A

PWC12A

PWC28A

PWC14

PWC16A

PWC27

PWC42

PWC24

PWC5



PWC8

PWC19

PWC6

PWC22A

Strippers/Cutters/Crimpers

Stock No.	Description	Length, inches (A)	Strips AWG Sizes	Strips Metric Sizes, mm	Application	Replacement Blades
PWC12A	Wire Stripper/ Cutter/Crimper	9 1/2	10, 12, 14, 16, 18	10–18 Insulated and Non-Insulated 7 mm–8 mm Ignition Terminals	—	–
PWC28A	Wire Stripper/Cutter/ Crimper/Bolt Cutter	8 1/4	10, 12, 14, 16, 18, 20, 22 Stranded, 8, 10, 12, 14, 16, 18 Solid	10–22 Non-Insulated Terminals and Crimp Sleeves	—	–
PWC14	Wire Stripper/Cutter/ Crimper/Bolt Cutter	8 3/4	10, 12, 14, 16, 18, 20, 22	10–22 Insulated and Non-Insulated 7 mm–8 mm Ignition Terminals	—	–
PWC16A	Wire Cutter/Stripper	5	10–18	Adjustable	Strips PVC, THHN and THWN	–
PWC27	Automatic Wire Stripper	6 1/4	10, 12, 14, 16, 18, 20, 22	—	Strips PVC, THHN, and THWN	PWC27-7
PWC42	Automatic Wire Stripper	5 1/2	16, 18, 20, 22	1.5, 1.0, .5, .42	Cotton Coated PVC Wire, and Silicone Coated Wire	PWC42-17
PWC24	Automatic Wire Stripper	6 1/4	16, 18, 20, 22, 24, 26	—	Strips Teflon® Type E Wire	PWC24-1
PWC5	Mini Wire Cutter/Stripper	5 1/16	26–14	—	Copper Wire	–
PWC8	Wire Stripper/Cutter	5 7/8	14–10 AWG	—	Copper Wire	–
PWC19	Micro Shear Wire Cutters	5 1/8	Up to 20	Up to .80	—	–
PWC6	Wire Stripper/Cutter Pliers	6	10, 12, 14, 16, 18, 20	2.6, 2.0, 1.6, 1.3, 1.0, .80	Strips PVC, THHN and THWN	–
PWC22A	Automatic Wire Stripper with Cutter	7 1/4	12, 14, 16, 18, 20	—	Strips PVC, THHN and THWN	–

Dipped Grips

Stock No.	Description	Jaw Length, inches	Length, inches	Set Contains: BDGPL800
BDGAWP100	Adjustable Joint Pliers	1 3/4	10	•
BDG48CP	Slip Joint Pliers	1 27/32	8	•
BDG98CP	Long Needle Nose Pliers	3	8	•
BDG9845CP	45° Bent Needle Nose Pliers	2 13/16	7 3/4	•
BDG57CP	Lineman's	1 1/4	7 1/2	•
BDGEC7	End Cutter	7/16	7	•
BDG86CP	Diagonal Cutter	21/32	6 1/2	•
BDG88CP	Diagonal Cutter	15/16	8 1/8	•

BDGPL800

Standard

Stock No.	Description	Jaw Length, inches	Length, inches	Set Contains: BPL501
B48CP	Slip Joint Pliers	2 3/32	8 13/32	•
B58HLP	Lineman's Pliers	1 1/2	8 31/32	•
B96CP	Needle Nose Pliers	2 1/32	6 5/16	•
BAWP100	Adjustable Joint Pliers	1 3/8	10 5/32	•
B87CP	Diagonal Cutters	31/32	6 19/32	•

BPL501

Miniature

Stock No.	Description	Jaw Length, inches	Length, inches	Set Contains: BMPL1000
B45CMP	Combination Pliers	1	4 11/16	•
B65CMP	Duckbill Pliers	1 5/32	4 7/8	•
B75CMP	Round Nose Pliers	1 5/32	5	•
B85CMP	Diagonal Cutter	21/32	4 11/32	•
B85CTMP	Thin Diagonal Cutter	23/32	4 5/8	•
B945CMP	45° Bent Nose Pliers	1	4 11/16	•
B95CMP	Long Nose Pliers	1 1/8	4 7/8	•
B95CLMP	Long Needle Nose Pliers	2 1/16	5 25/32	•
B960CMP	60° Bent Nose Pliers	15/16	4 11/16	•
BMPEC5	End Cutter	5/16	4 1/32	•

Sets shown include storage tray

BMPL1000

Miniature Pliers and Cutters/Vinyl Grips

Stock No.	Description	Jaw Length, inches	Length, inches	Set Contains: BDGMPL845	Set Contains: BDGCPL700
BDG45CMP	Combination Pliers	1	4 11/16	•	•
BDG85CMP	Diagonal Cutter	21/32	4 11/32	•	
BDG85CTMP	Thin Diagonal Cutter	23/32	4 5/8	•	•
BDG945CMP	45° Bent Nose Pliers	1	4 11/16	•	•
BDG65CMP	Duckbill Pliers	1 5/32	4 7/8	•	
BDG95CMP	Long Nose Pliers	1 1/8	4 7/8	•	
BDG95CLMP	Long Needle Nose Pliers	2 1/16	5 25/32	•	•
BDGMPEC5	End Cutter	5/16	4 1/32	•	

BDGMPL845

BDGMPL845 Miniature Pliers and Cutters Set
- Includes eight commonly used mini pliers for precision work in confined spaces

BDGCPL700 Pliers and Cutters Set
- Set includes: BDG48CP 8" Slip Joint Pliers, BDG88CP 8 1/8" Diagonal Cutters and BDG98CP 8" Needle Nose Pliers plus the three miniature pliers and cutter indicated in the chart to cover a large range of jobs
- BDG98CP Needle Nose Pliers features a fastener-turning jaw and cutter

BDGCPL700

⚠WARNING

- Plastic coated handles on these pliers and cutters do not protect against electric shock
- Read safety precautions on pages W1 to W4

PLIERS AND CUTTERS Blue-Point®

BDGPL400LMP

Long Reach Miniature

Set Contains: BDGPL400LMP

Stock No.	Description	Jaw Length, inches	Length, inches	
BDG96LMP	Long Nose	1 5/16	6	•
BDG97LMP	Needle Nose	2 13/32	7	•
BDG9645LMP	45° Bent Needle Nose	1 7/32	6	•
BDG86LMP	Diagonal Cutters	3/4	5 1/2	•

BDGPL300HG

Extended Reach Hose Grip

Set Contains: BDGPL300HG

Stock No.	Description	Jaw Length, inches	Length, inches	
BDGPL410HG	Small Hose Grip Pliers	2 1/4	11	•
BDGPL411HG	Medium Hose Grip Pliers	2 1/4	11	•
BDGPL412HG	Large Hose Grip Pliers	2	11	•

BDGPL300LR

Long Reach

Set Contains: BDGPL300LR

Stock No.	Description	Jaw Length, inches	Length, inches	
BDG311CP	Diagonal Cutter	1 9/16	11	•
BDG91145CP	45° Bent Needle Nose	3 3/16	11	•
BDG911CP	Needle Nose	3 9/16	11	•

BDGPL200XLR

Extra Long Reach

Set Contains: BDGPL200XLR

Stock No.	Description	Jaw Length, inches	Length, inches	
BDG91645CP	45° Bent Needle Nose	3 3/16	16	•
BDG916CP	Needle Nose	3 9/16	16	•



AP10

Adjustable Joint

Stock No.	Description	Max. Jaw Postions (A)	Parallel Opening, inches (B)	Length, inches (C)
AP7	Adjustable Joint	9	1 1/2	7
AP10	Adjustable Joint	11	1 3/4	10
AP12	Adjustable Joint	13	2 1/16	12

BLPBC30

Heavy Duty Bolt Cutters

Drop forged, alloy steel jaws are precision ground to provide a long-lasting cutting edge. Lightweight, tubular steel handles deliver extra leverage for tough jobs. Comfortable, heavy duty grips resist slippage.

Stock No.	Capacity (Soft Material), inches	Capacity (Hard Material), inches	Length, inches	Weight, lb (kg)	Replacement Jaw Assembly
BLPBC18	3/8	1/4	18	3.4 (1.55)	BLPBC18-1
BLPBC24	7/16	5/16	24	5.6 (2.55)	BLPBC24-1
BLPBC30	1/2	3/8	30	8.6 (3.9)	BLPBC30-1
BLPBC36	9/16	7/16	36	14.2 (6.45)	BLPBC36-1

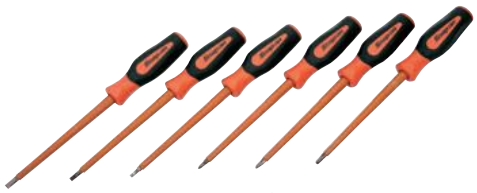

CNSGDX60

Screwdrivers (Soft Grip)

- Slim tip design accesses fasteners in tight areas faster and easier
- No conductive path to user
- No insulation to puncture, tear or wear through
- Exceeds ANSI®, ISO® and ASME® strength and performance requirements for standard steel tools
- Every tool is individually tested to protect up to 1,000V AC and 1,500V DC
- Snap-on® nonconductive tools are UL® listed, assuring compliance to IEC® 60900

	Stock No.	Tip Size	Shank Length, inches	Length, inches	Set Contains: CNSGDX60
Flat Tip	CNSGDF66	3/16	6	11 1/2	•
	CNSGDF68	1/4	6	11 1/2	•
	CNSGDF69	9/32	6	11 1/2	•
Phillips® Tip	CNSGDP61	#1	6	11 1/2	•
	CNSGDP62	#2	6	11 1/2	•
	CNSGDP63	#3	6	11 1/2	•

IHTP62

IHTS6

IHT60K

Screwdrivers (Screwdriver Handle)

- No conductive path to user
- No insulation to puncture, tear or wear through
- Every tool is individually tested to protect up to 1,000V AC and 1,500V DC

	Stock No.	Tip Size	Shank Length, inches	Length, inches	Replacement Bit	Set Contains: IHT60K
Flat Tip	IHTS3	3/16	3 1/4	8 3/16	IHTS65	•
	IHTS37	7/32	3 1/4	8 3/16	IHTS375	
	IHTS38	1/4	3 1/4	8 3/16	IHTS685	
	IHTS6	1/4	6	11	IHTS685	•
	IHTS610	5/16	6	11	IHTS6105	
	IHTS9	5/16	9	14	IHTS6105	•
	IHTS912	3/8	9	14	IHTS9125	
Phillips TIp	IHTP31	#1	3 1/4	8 3/16	IHTP315	•
	IHTP62	#2	6	11	IHTP625	•
	IHTP63	#3	6	11	IHTP635	•

CSSC9

SGDMRC4-C6

Screwstarters and Screwdriver Shanks

- No conductive path to user
- No insulation to puncture, tear or wear through
- Every tool is individually tested to protect up to 1,000V AC and 1,500V DC
- *Snap-on* nonconductive tools are *UL* listed, assuring compliance to *IEC* 60900

Stock No.	Handle Type	Handle Diameter, inches	Tip Style	Tip Style	Length, inches
CSSC9	Composite*	9/32	Flat Tip/*Phillips*	.032" x 9/32", #2	9
SGDMRC4-C6	Composite Magnetic Bit Holder	3/8	—	—	7 1/4

*Rated shock resistant up to 1,000V.

⚠WARNING

- Plastic coated handles on these pliers and cutters do not protect against electric shock
- Do not use damaged nonconductive tools
- Read safety precautions on pages W1 to W4

NONCONDUCTIVE COMPOSITE TOOLS

207CFDSY



IHT208K

3/8" Drive Sockets, inches, 12-Point

Set Contains: 207CFDSY

	12	Outside Diameter, inches (A)	Length, inches (B)	12
1/4	CFDS8B	15/16	1 3/4	
5/16	CFDS10B	15/16	1 3/4	
3/8	CFDS12B	1	1 3/4	•
7/16	CFDS14B	1	1 3/4	•
1/2	CFDS16B	1 3/16	2	•
9/16	CFDS18B	1 3/16	2	•
5/8	CFDS20B	1 3/16	2	•
11/16	CFDS22B	1 3/8	2 1/4	•
3/4	CFDS24B	1 3/8	2 1/4	•

IHT208K Nonconductive Composite Ratchet and Socket Set
CFDS12B – CFDS24B sockets (3/8"–3/4") (8-piece) plus CFS949A ratchet in C0800 kit bag.

CFS949A

Ratchets

- No conductive path to user
- No insulation to puncture, tear or wear through
- Every tool is individually tested to protect up to 1,000V AC and 1,500V DC
- *Snap-on* nonconductive tools are *UL* listed, assuring compliance to *IEC* 60900

Stock No.	Square Drive, inches (A)	Head Width, inches (B)	Length, inches (C)	Repair Kit
CFS949A	3/8	1 19/32	8 3/4	RKRCFS949A
CSS949A	1/2	1 19/32	8 3/4	RKRCSS949

CFX6



Extensions

Stock No.	Square Drive, inches (A)	Outside Diameter, inches (B)	Length, inches (C)
CFX3	3/8	1	3
CFX6	3/8	2	6
CFX12	3/8	2	12
CSX5	1/2	1 5/16	5 21/32
CSX10	1/2	1 5/16	10 21/32

CFDSM15B

3/8" Drive Sockets, mm, 12-Point

Nonconductive Composite Socket

- No conductive path to user
- No insulation to puncture, tear or wear through
- Strong as steel
- Every tool is individually tested to protect up to 1,000V AC and 1,500V DC
- Snap-on® nonconductive tools are UL® listed, assuring compliance to IEC® #60900

mm	12	Outside Diameter, mm (A)	Length, mm (B)
10	CFDSM10B	25.1	44.9
12	CFDSM12B	29.6	51.2
13	CFDSM13B	29.6	51.2
14	CFDSM14B	29.6	51.2
15	CFDSM15B	29.6	51.2
16	CFDSM16B	33.5	57.4
17	CFDSM17B	33.5	57.4
18	CFDSM18B	33.5	57.4
19	CFDSM19B	33.5	57.4

CSN24B

Breaker Bar

- Features the comfort and control of a *Snap-on* screwdriver style handle
- *UL* listed
- Each tool is individually tested to protect up to 1,000V AC and 1,500V DC
- Meets *IEC* 60900 and ASTM® 1505 standards for insulating hand tools
- Exceeds ASME®/ANSI® B107.10M strength requirements for standard steel tools

Stock No.	Head Width, inches	Length, inches	Head Diameter, inches
CSN24B	1 1/8	24 1/2	1

CA1MF

CFSSB8



Adaptors

- No conductive path to user
- No insulation to puncture, tear or wear through
- Strong as steel
- Every tool is individually tested to protect up to 1,000V AC and 1,500V DC
- Only *Snap-on* nonconductive tools are *UL* listed, assuring compliance to *IEC* #60900

Stock No.	Description	External Square Drive, inches (A)	Internal Square Drive, inches (B)	Outside Diameter, inches (C)	Length, inches (D)
CA1MF	1/2" Square Drive Adaptor	3/8	1/2	1 5/16	3 25/32
CA2A	3/8" Square Drive Adaptor	1/2	3/8	1	3 7/8

CFSSB8 Nonconductive Composite Universal Bit Socket
Composite (insulating) universal bit socket for holding 1/4" bits. 3/8" square drive, 1" O.D., 1 3/4" long.



CRB1824

Ratcheting Box Wrench

- UL® listed
- Individually tested to protect up to 1,000V AC and 1,500V DC
- Meets IEC® 60900 ASTM® standards for insulating hand tools

Stock No.		Finish	Head Diameter, inches (A)	Head Depth, inches (B)	Length, inches (C)
CRB1824	9/16–3/4	Composite	1 9/16–1 13/16	5/8–5/8	9 1/16



C97CP

C59AHLP

Pliers

- Nonconductive needle nose pliers feature all composite jaw and handle
- Spring loaded joint returns pliers to comfortable working position
- Durable jaw teeth aid in gripping and twisting
- Integral thumb guard for user protection
- Each tool is individually tested to protect up to 1,000V AC and 1,500 VDC
- Snap-on® nonconductive tools are *UL* listed, assuring compliance to *IEC* 60900 *ASTM* standards for insulating hand tools
- Nonconductive lineman pliers have same quality as standard lineman pliers for performance and durability
- Nonconductive handles are soft grip for comfort and control
- Handles feature thumb guards, two-position grip and tether hole
- Each tool is individually tested to ensure protection up to 1,000V AC and 1,500V DC

Stock No.	Description	Jaw Length, inches (A)	Length, inches (B)	Tip Width, inches (C)
C97CP	Needle Nose Pliers	2	8 1/2	5/32
C59AHLP	Lineman's Pliers	1 13/32	10	—



107CNDD

Nut Drivers

- *Snap-on* nonconductive composite nut drivers have the 6-point Flank Drive® wrenching system for greater turning power with less fastener damage. Nut drivers feature narrow, nonconductive composite shanks for greater access and a full 5" bolt clearance depth
- Screwdriver style handles provide maximum comfort and control
- Handles are color coded for easy size reference
- Sizes are stamped on the handle crown for better visibility when wearing a tool pouch
- Each tool is individually tested to ensure protection up to 1,000V AC and 1,500V DC
- *Snap-on* nonconductive tools are *UL* listed, assuring compliance to *IEC* 60900 *ASTM* standards for insulating hand tools
- US Pate nt #6,427,563

Stock No.		Bolt Clearance Diameter, inches (A)	Length, inches (B)	Set Contains: 107CNDD
CNDD106	3/16	5/32	7 5/8	•
CNDD107	7/32	5/32	7 5/8	•
CNDD108	1/4	5/32	7 5/8	•
CNDD110	5/16	5/32	7 5/8	•
CNDD112	3/8	11/32	8 3/8	•
CNDD114	7/16	11/32	8 17/32	•
CNDD116	1/2	11/32	9 1/16	•

⚠WARNING

- Do not use damaged nonconductive tools
- Do not use "cheater bars" on handles
- Do not use with impact drivers
- Read safety precautions on page W1 to W4

THE POWER IS IN YOUR HAND.

No matter what your style or needs – from finesse to power – Snap-on® offers a range of hammers, punches, and chisels to fit every one. And they come in both hard and soft grips, featuring a soft, more comfortable energy-absorbing material.

PUNCHES AND CHISELS THAT PACK A PUNCH.

The anvil end on the heads of our punches and chisels are machined to a modified parabolic curve. This directs the striking force to the center of the tool head to help control mushrooming, allow slow metal displacement, and reduce chipping and splitting. The steel alloy is machined and differentially heat-treated for optimum performance, and the hardness of the striking head is reduced – enhancing toughness, and resulting in slower mushrooming.

WE'VE NAILED HAMMERS.

Snap-on offers a line of hammers that are made from a non-sparking, thermoplastic urethane material resistant to most shop chemicals. And these hammers feature the works: dry-rot prevention, warp prevention, balanced hammerheads, multi-grips, and more.

HBFE SERIES DEAD BLOW HAMMERS

Free-flowing shot, head design improves dead blow action while reducing rebound. Compact heads have a larger surface striking area and heavier caps – improving delivered force by as much as 40%.

HBBD SERIES BALL PEEN HAMMERS

Steel-canister head design, with free-flowing shot, improves dead blow action, while reducing rebound. Soft-grip handle with ribbed, textured elastomer grip prevents hand slippage. Composite handle shank improves balance while defusing shock and dampening vibration.

HBSE SERIES SLIMLINE DEAD BLOW HAMMERS

Smaller face for more concentrated blows. Longer head profile for extended reach. Internal steel canister with free-flowing shot design delivers maximum dead blow action. Wide flare at end of handle helps prevent hand slippage. Microcellular soft-grip handle features a softer, more comfortable energy-absorbing material.

Punches and Chisels

The anvil end on heads of Snap-on® punches and chisels are machined to a modified parabolic curve. This design directs the striking force to the center of the tool head to allow slow metal displacement. The parabolic curve controls mushrooming to reduce chipping and splitting. Heads should be redressed to their original shape with hand files as necessary. The tough alloy steel is machined and differentially heat treated for optimum performance. The hardness of the striking head is reduced to help toughness and add qualities that result in a slower mushrooming of the striking surface.

PPC250BK Punch and Chisel Set
Includes 24 pcs in KB2179 kit bag:
PPC1A PPC106A PPC205A PPC820B
PPC3A PPC108A PPC206A PPC824B
PPC4A PPC110A PPC208A PPC12B
PPC103A PPC112 PPC210A PPC14B
PPC104A PPC203A PPC812B PPC15B
PPC105A PPC204A PPC816B PPC19B

PPC250BK

PPC210BK Punch and Chisel Set
Includes 22 pcs in KB2178 kit bag:
PPC1A PPC105A PPC204A PPC816B
PPC3A PPC106A PPC205A PPC820B
PPC4A PPC108A PPC206A PPC824B
PPC5A PPC110A PPC208A PPC828B
PPC103A PPC112 PPC210A
PPC104A PPC203A PPC812B

PPC210BK

PPC715BK Punch and Chisel Set
Includes 16 pcs in KB2182 kit bag:
PPC1A PPC104A PPC203A PPC208A
PPC3A PPC105A PPC204A PPC812B
PPC4A PPC106A PPC205A PPC816B
PPC103A PPC108A PPC206A PPC820B

PPC715BK

PPC710BK Punch and Chisel Set
Includes 11 pcs in KB2181 kit bag:
PPC1A PPC105A PPC205A PPC816B
PPC4A PPC106A PPC206A PPC820B
PPC103A PPC203A PPC812B

PPC710BK

PPSD120BK Pin and Starter Punch Set
Includes 12 pcs in KB2187 kit bag:
PPC103A PPC106A PPC203A PPC206A
PPC104A PPC108A PPC204A PPC208A
PPC105A PPC110A PPC205A PPC210A

PPSD120BK

PPC100AK Punch and Chisel Set
Includes ten pcs in KB2175 kit bag:
PPC812B PPC828B PPC15B
PPC816B PPC12B PPC19B
PPC820B PPC13B
PPC824B PPC14B

PPC100AK

PPCD70BK Pin Punch Set
Includes seven pcs in KB2183 kit bag:
PPC103A PPC106A PPC110A
PPC104A PPC107A
PPC105A PPC108A

PPCD70BK

PPCS60BK Starter Punch Set
Includes six pcs in KB2185 kit bag:
PPC203A PPC205A PPC208A
PPC204A PPC206A PPC210A

PPCS60BK

PPC50AK Flat Chisel Set
Includes five pcs in KB2173 kit bag:
PPC812B PPC820B PPC828B
PPC816B PPC824B

PPC50AK

PPCM60BK Metric Pin Punch Set
Includes six pcs in KB2189 kit bag:
PPCM103B PPCM104B PPCM105B
PPCM106B PPCM107B PPCM108B

PPCM60BK

	Stock No.	Hex Size, inch	Point/Edge, inch (mm)	Length, inch (mm)
Punch and Chisel Accessories	PPC1A Chisel Gauge	—	—	2 5/8
	PPC5A Punch/ Chisel Holder	—	—	6 15/16
Center Punches	PPC3A	5/16	1/8	5
	PPC4A	7/16	3/16	6
	PPC6B	5/8	5/16	7
	PPC714B	9/16	5/32	14
Pin Punches	PPC103A	9/32	3/32	4 7/32
	PPC104A	5/16	1/8	4 3/4
	PPC105A	3/8	5/32	5
	PPC106A	3/8	3/16	5 1/4
	PPC107A	3/8	7/32	5 1/4
	PPC108A	7/16	1/4	5 3/4
	PPC110A	1/2	5/16	5 1/4
	PPC112	9/16	3/8	5 1/4
Metric Pin Punches	PPCM103B	5/16	(3)	(159)
	PPCM104B	5/16	(4)	(159)
	PPCM105B	3/8	(5)	(159)
	PPCM106B	3/8	(6)	(159)
	PPCM107B	3/8	(7)	(159)
	PPCM108B	7/16	(8)	(159)
Starter Punches	PPC203A	5/16	3/32	5 1/2
	PPC204A	3/8	1/8	5 3/4
	PPC205A	3/8	5/32	6
	PPC206A	7/16	3/16	6 1/4
	PPC208A	1/2	1/4	6 3/4
	PPC210A	9/16	5/16	7 1/4

	Stock No.	Hex Size, inch	Point / Edge, inch (mm)	Length, inch (mm)
Flat Chisels	PPC808A	1/4	1/4	5
	PPC812B	5/16	3/8	5 1/2
	PPC816B	7/16	1/2	6
	PPC820B	1/2	5/8	6 1/2
	PPC824B	5/8	3/4	7 1/4
	PPC828B	11/16	7/8	8
	PPC832B	7/8	1	9
	BPPC1878*	7/8	1	18
Long Flat Chisels	PPC820LB	1/2	5/8	16
Half Round Nose Cape Chisels	PPC12B	3/8	5/16	6
Cape Chisels	PPC13B	5/16	1/4	5 5/8
	PPC14B	3/8	5/16	6
Diamond Point Chisels	PPC15B	7/16	7/32	6
	PPC19B	3/8	1/8	5 3/4

*Blue-Point®

⚠WARNING

- Use the proper punch or chisel for the job
- Do not use punches or chisels having chipped or mushroomed end; discard or dress to original shape with a hand file
- Use hammer with head about 3/8" larger in diameter than head of punch or chisel
- Read safety precautions on pages W1 to W4

PUNCHES AND CHISELS

PPRG80

PPRG80 Roll Pin Punch Guide Set
- Companion tool for the PPR708BK roll pin punch set
- Provides faster, safer pin installation
- Pin guide is a vinyl sleeve uniting pin and punch to achieve perfect alignment during installation
- Ideal for pin installation in tight quarters where two hands can't reach
- Use with Snap-on® roll pin punches PPR2–PPR8 (1/16"–1/4")
- Can also be used with *Snap-on* pin punches PPC103A–PPC108A (3/32"–1/4") and long pin punches PPC104LA–PPC108LA (1/8"–1/4")

PPR708BK

PPR708BK Roll Pin Punch Set
Includes eight pcs in KB2186 kit bag:
PPR2 PPR4 PPR7
PPR2-1/2 PPR5 PPR8
PPR3 PPR6

PPCL60BK

PPCL60BK Long Pin Punch Set
Includes six pcs in KB2184 kit bag:
PPC104LA PPC106LA PPC108LA
PPC105LA PPC107LB PPC110LA

PPVP70BK

PPVP70BK Midget Punch and Chisel Set
Includes seven pcs in KB2188 kit bag:
PPC402A PPC406B PPC403A
PPC407B PPC404A PPC408B
PPC405A

PPLT40AK

PPLT40AK Drift Pin Punch Set
Includes four pcs in KB2174 kit bag:
PPC905B PPC908B PPC910B
PPC912B

LP30A

LP30A Drift Pin Punch Set
Includes three pcs in KB2177 kit bag:
1210B 1512B 1816B

PPBL30AK

PPB30AK Bronze Punch Set
Includes three pcs in KB2171 kit bag:
PPB408A PPB612A PPB816A

PPBL30AK Bronze Punch Set
Includes three pcs in KB2172 kit bag:
PPB1012A PPB1226A PPB826A

PPB20AK Bronze Tapered Punch Set
Includes two pcs in KB2170 kit bag:
PPB1012A PPB1414A

	Stock No.	Hex Size, inch	Point/ Edge, inch	Length, inch
Roll Pin Punches	PPR2	—	1/16	3 5/32
	PPR2-1/2	—	5/64	3 1/2
	PPR3	—	3/32	3 29/32
	PPR4	—	1/8	4 1/4
	PPR5	—	5/32	4 5/8
	PPR6	—	3/16	5
	PPR7	—	7/32	5 3/8
	PPR8	—	1/4	5 3/4
	PPR10	—	5/16	6 1/8
	PPR12	—	3/8	6 1/8
	PPR14	—	7/16	6 1/8
	PPR16	—	1/2	6 1/8
Long Pin Punches	PPC104LA	5/16	1/8	5 5/16
	PPC105LA	3/8	5/32	6 1/2
	PPC106LA	3/8	3/16	7 1/16
	PPC107LB	3/8	7/32	7 5/8
	PPC108LA	7/16	1/4	8 3/16
	PPC110LA	1/2	5/16	8 3/4
Midget Punches and Chisels	PPC402A Pin Punch	9/32	1/16	3
	PPC403A Pin Punch	9/32	1/8	3 1/4
	PPC404A Center Punch	9/32	3/32	3 5/8
	PPC405A Starter Punch	9/32	1/16	3 3/4
	PPC406B Cape Chisel	9/32	3/16	3 7/8
	PPC407B Cape Chisel	9/32	5/32	4
	PPC408B Flat Chisel	—	5/16	4 1/8

	Stock No.	Hex Size, inch	Point/ Edge, inch	Length, inch
Drift Pin Punches	PPC905B	3/8	5/32	8
	PPC908B	7/16	1/4	8 1/2
	PPC910B	1/2	5/16	9
	PPC912B	9/16	3/8	9 1/2
	1210B	5/8	5/16	12
	1512B	3/4	3/8	15
	1816B	7/8	1/2	18
Bronze Pin Punches	PPB408A	—	1/4	4
	PPB612A	—	3/8	6
Bronze Drift Punches	PPB816A	—	1/2	8
	PPB826A	—	13/16	8
	PPB1226A	—	13/16	12
Bronze Tapered Punches	PPB1001A	5/8	3/8	8
	PPB1012A	—	3/8	10
	PPB1414A	—	7/16	14
Bronze Round Punch	PPB1002A	—	3/4	10

Soft Grip

- Ergonomic soft grip handle provides a powerful grip, improves the thermal sensation in cold work environments and reduces strike vibration
- Semispherical striking area controls mushrooming to help reduce chipping and splitting
- Cutting edges on chisels are hand ground to consistently produce a quality edge
- Black oxide coated
- Manufactured from special alloy steel that is differentially heat treated to increase durability

PPCSG710

Stock No.	Description	Point/Edge, inch	Length, inch	Set Contains: PPCSG710
PCSG812	Flat Chisel	3/8	6 1/8	•
PCSG816	Flat Chisel	1/2	6 1/8	•
PCSG820	Flat Chisel	5/8	6 1/8	•
PPSG4	Center Punch	3/16	6 1/8	•
PPSG103	Pin Punch	3/32	6 1/8	•
PPSG105	Pin Punch	5/32	6 1/2	•
PPSG106	Pin Punch	3/16	6 1/2	•
PPSG203	Starter Punch	3/32	6 1/8	•
PPSG205	Starter Punch	5/32	6 1/8	•
PPSG206	Starter Punch	3/16	6 1/8	•

PPC14LB

Oval Bearing Race Punches

High alloy steel makes these tools ideal for stubborn bearing races.

PPC6LB Oval Bearing Race Punch
7/16" hex stock, 7/16" x 15/64" oval point, 6" long.

PPC10LB Oval Bearing Race Punch
1/2" hex stock, 1/2" x 17/64" oval point, 10" long.

PPC14LB Oval Bearing Race Punch
9/16" hex stock, 9/16" x 19/64" oval point, 14" long.

PPC20LB Oval Bearing Race Punch
9/16" hex stock, 5/8" x 5/16" oval point, 20" long.

PPC704BK Punch Set
Includes PPC6LB–PPC20LB (four-piece).

PGH8A

Gasket Punch Set

PGH8A Gasket Punch Set

- Cuts holes in gaskets and other soft materials
- Includes 5 3/8" long mandrel and (ten) punches: 1/4", 5/16", 3/8", 7/16", 1/2", 9/16", 5/8", 3/4", 7/8" and 1" in a storage case

GA1

Bushing Cutter

GA1 Bushing Cutter (7 1/4" long)

- Made of 1/2" octagonal stock with a 7/16" x 1/8" bit
- Curved bit pushes material away from work

YA900

YA879A

Automatic Centering Punches *(Blue-Point)*

YA900 Automatic Center Punch (4 3/4" long)

- Strikes blow when pressure is applied, no hammer needed
- Cap adjusts force of blow
- 7/16" diameter

YA879A Heavy Duty Automatic Center Punch (5" long)

- Single hand operation
- Design eliminates need for striking with hammer
- Adjustable spring tension cap
- Hardened steel point is replaceable
- 1/2" diameter

DPFT528B

Transfer Punch Set (Blue-Point®)

DPFT528B Transfer Punch Set

- For transferring hole patterns
- Set includes 31 punches from 3/32"–1/2" in 1/64" increments plus 17/32"
- Each punch is marked with its size and manufactured from tempered steel to promote long tool life
- Roll bag provides convenient storage
- Punches are 4 7/8" in length

GA237

Steel Stamping Sets *(Blue-Point)*

- Heat treated square stamp bodies
- Stored in two-piece wooden containers

Set Stock No.	Characters	Number Stamps	Figure Size, inches	Square Body, inches	Length, inches
GA237	0–9*	9	3/16	5/16	2 7/16
YA817	0–9*	9	1/8	1/4	2 3/8
GA238	A–Z**	27	3/16	5/16	2 7/16
YA818	A–Z**	27	1/8	1/4	2 3/8

*One stamp serves as both 6 and 9. **Also includes stamp for period.

⚠WARNING

- Use the proper punch or chisel for the job
- Do not use punches or chisels having chipped or mushroomed end; discard or dress to original shape with a hand file
- Use hammer with head about 3/8" larger in diameter than head of punch or chisel
- Read safety precautions on pages W1 to W4

DEAD BLOW

HBFE32

HBFE Series Dead Blow Hammers

- Free flowing shot design to improve dead blow action while reducing rebound
- Compact head has larger surface striking area and heavier caps to improve delivered force by as much as 40%
- Soft grip handle with ribbed, textured elastomer grip prevents hand slippage
- Composite handle shank improves balance while diffusing shock and dampening vibration
- Improved thermoplastic urethane material is non-sparking and resistant to most shop chemicals

Applications: Brake rotors, brake drum removal, ball joints (tie rod removal), tires, seal installation, loosen oil pans and covers, OE rims, axle insertion, piston installation and crank shaft end play

Stock No.	Weight, oz	Head Length, inches	Face Diameter, inches	Length, inches	Set Contains: HBFE103
HBFE16	16	3 1/4	1 9/16	12	
HBFE24	24	3 3/4	1 3/4	12 3/4	•
HBFE32	32	4 1/4	2	13 1/2	•
HBFE48	48	4 3/4	2 1/4	15	•
HBFE56	56	5 7/16	2 3/4	15 3/4	

HBBD24

HBBD Series Ball Peen Hammers

- Freeflowing steel canister shot design to improve dead blow action while reducing rebound
- Soft grip handle with ribbed, textured elastomer grip prevents hand slippage
- Composite handle shank improves balance while defusing shock and dampening vibration

Applications: Rear drums, tie rods, U-joints rounded end, track bar rounded end, rivets, punch and chisel applications

Stock No.	Weight, oz	Head Length, inches	Face Diameter, inches	Length, inches
HBBD8	8	4	1	11 5/8
HBBD16	16	4 3/8	1 1/4	12 1/4
HBBD24	24	4 3/4	1 3/8	12 3/4
HBBD32	32	5 3/4	1 3/4	13 5/8
HBBD40	40	5 3/4	1 3/4	15 1/8

Dual Face Drilling

- Sustained impact and maximum striking force with almost no rebound
- Composite handle shank improves the hammer balance while defusing shock
- Free flowing steel head canister design improves dead blow action and reduces rebound
- Non-sparking, chemical-resistant molded urethane covering
- Ribbed thumb rest allows user to choke up in tighter work areas

HBSE20

HBSE Series Slimline Dead Blow Hammers

- Smaller face – For more concentrated blows
- Longer head profile – For extended reach
- Internal steel canister with free flowing shot design – Delivers maximum dead blow action
- Multi-position hand grip – Helps user “choke up” in tighter work areas
- Wide flare at end of handle – Helps prevent hammer from slipping out of hand
- Microcellular grip and composite shank – Comfortable, secure grip and dampens the vibration to the user’s hand

Applications: Main bearing caps, dust caps, smalller objects, custom bikes and tighter applications that standard dead blow hammers will not fit

Stock No.	Weight, oz	Head Length, inches	Face Diameter, inches	Length, inches
HBSE10	10	3 1/2	1 1/4	10 5/8
HBSE20	20	4 1/8	1 3/8	11 1/8
HBSE30	30	5 1/8	1 1/2	12 3/8

BC110B

Sledge

Stock No.	Weight, lb	Head Length, inches	Face Diameter, inches	Length, inches
BC7B	5	7	2 3/4	20
BC110B	8	7	2 3/4	30
BC114B	11 lb 8 oz	8	3 1/4	36

HLE24

Piston

- One-piece urethane construction
- Full length canister increases head strength
- Made of material that will not damage the piston
- Shot filled head drastically reduces rebound

Stock No.	Weight, oz	Head Length, inches	Face Diameter, inches	Length, inches
HLE24	24	7 3/4	5 1/2	12 3/4

HSSD32

Stock No.	Weight, oz	Head Length, inches	Face Diameter, inches	Length, inches
HSSD32	32	5 3/8	1 3/4–1 3/8	11 1/2

HBBT32

HBBT Series

- Bronze tipped non-marring hammer ideally suited for work on bushings, gears and transmissions
- Microcellular grip

Applications: Bearings and race install, pinion and half shafts, distributor rebuilds, alternator and starter rebuilds, seal installation, body moldings and non-spark applications

Stock No.	Weight, oz	Head Length, inches	Head Diameter inches	Length, inches
HBBT16	16	3 3/4	1 3/8	12
HBBT24	24	4 1/4	1 3/8	12
HBBT32	32	4 1/2	1 1/2	12 3/4

BF623

BF620C

Soft Blow (Blue-Point®)

- Designed to reduce marring and denting
- Use in assembly applications and on surfaces including metal, glass, plastic and wood
- Special polymer head resists dynamic fatigue, creep and compression set, even at extreme temperatures

Stock No.	Face Dimensions, inches	Head Color	Length, inches
BF623	1 7/8 x 2 1/8	Blue	12 1/2

BF620C Rubber Head Mallet

- Solid rubber head is 3 3/4" long, 2 1/4" diameter
- 11" hardwood handle

HSPI6KT

Interchangeable Head *(Blue-Point)*

- Shot loaded, dead blow hammer adds more striking force by eliminating rebound and dampening vibration shock
- 1 1/2" striking face diameter on each hammer head
- Six interchangeable heads meet a number of various applications
- Comfortable, nonslip handle grip
- Set includes 10" fiberglass handle and storage case
- 1" head extender is optional

Stock No.	Description	Color	Weight, oz	Set Contains: HSPI6KT
HSPI6KT1	Hammer Handle	—	22	•
HSPI6KT2	Soft Face	Brown	1.5	•
HSPI6KT3	Medium Face	Red	1.4	•
HSPI6KT4	Medium Hard Face	Cream	1.3	•
HSPI6KT5	Hard Face	Black	1.3	•
HSPI6KT6	Steel Face	Steel	2.2	•
HSPI6KT7	Brass Face	Brass	2.2	•
HSPI6KT8	Plastic Storage Case	Black	—	•
HSPI6KT9	1" Head Extender	—	—	

HBPT24

HBPT Series

- Plastic tipped hammers used where metal to metal scratching or marring needs to be eliminated

Applications: Transmission work, rear end work, metal body moldings and light tapping

Stock No.	Head Length, inches	Weight, oz	Length, inches	Soft Tip Stock No. (Black)	Hard Tip Stock No. (Gray)
HBPT16	3 3/4	16	12	HPTS16	HPTH16
HBPT24	4 3/4	24	12 3/4	HPTS24A	HPTH24A

HSPD16

BH232A

Combination

- Combination steel and soft face dead blow
- One-piece urethane construction
- Replaceable tips

Stock No.	Head Length, inches	Weight, oz	Tip Diameter, inches	Length, inches	Soft Tip Stock No.	Hard Tip Stock No.
HSPD16	4 3/8	16	1 1/4	12 1/8	HPTS16	—
BH232A*	—	32	1 5/8	13	BH232-2	BH232-3
BH232-4	Optional nylon tip (also available)					

**Blue-Point*

HBR15

Brass (Fiberglass Handle) *(Blue-Point)*

- Non-sparking/non-marring surface for many applications
- Brass head absorbs blow and reduces rebound
- Flat surface for even distribution of blow
- Comfortable, nonslip handle grip

Stock No.	Weight, lb	Length, inches
HBR15	1 1/2	12
HBR25	2 1/2	12
HBR4	4	12

HCL16

Claw Hammer

HCL16 Claw Hammer, 16 oz

- Drop forged carbon steel head
- Oversized striking surface
- Polyurethane leather improves grip and offers abrasion resistance and low temperature flexibility for unparalleled comfort
- Antishock core reduces vibration and hand fatigue
- One-piece construction delivers increased strength

⚠WARNING

- Do not use urethane hammers near liquid oxygen
- Do not strike another hammer or hardened object
- Do not use chipped, mushroomed or cracked hammer
- Strike squarely, avoid glancing blows
- Read safety precautions on pages W1 to W4

BALL PEEN

BP16B

Ball Peen (Hickory Handle)

Stock No.	Weight, oz	Handle Length, inches	Replacement Handle	BP1004S Set Contains:
BP2B	2	9 1/2	BPH2C	
BP4B	4	10 1/2	BPH4C	
BP8B	8	12 1/2	BPH8C	•
BP12B	12	13 1/2	BPH12C	•
BP16B	16	14 1/2	BPH16C	•
BP20B	20	15	BPH20C	
BP24B	24	16	BPH20C	•
BP32B	32	16	BPH40C	
BP40B	40	16 1/4	BPH40C	
BP48B	48	16 1/4	BPH40C	

ASME®/ANSI® B107.400

BPN16B

Ball Peen (Fiberglass Handle)

Stock No.	Weight, oz	Handle Length, inches	Replacement Handle	Previous Model Handle
BPN8B	8	11	BPNH8B	BPN8-1
BPN12B	12	12	BPNH12B	BPN12-1
BPN16B	16	13	BPNH12B	BPN16-1
BPN24B	24	14	BPNH24B	BPN24-1
BPN32B	32	16	BPNH24B	BPN24-1

ASME/ANSI B107.400

HEAVY DUTY Blue-point®

HCB2SG

HCS2SG

Dual Face Dead Blow (Fiberglass Handle)

- 100% cast polyurethane face is designed to withstand the most severe striking applications
- Non-sparking/non-marring brass face for multiple applications
- Non-ferrous shot loaded cavity delivers more power and less rebound than any hammer of its kind
- Abrasion- and impact-resistant
- Chemical resistant
- Comfortable, nonslip handle grip

Applications: aerospace, automotive, metal fabrication, petrochemical, electronics, industrial assembly, construction, oil and mining

Stock No.	Weight, lb (kg)	Face Diameter, inch (mm)	Handle Length, inch (mm)	Overall Length, inch (mm)
HCB2SG	2 (.91)	2 (50.8)	10 5/8 (270)	13 3/4 (349)
HCS2SG	2 (.91)	2 (50.8)	10 5/8 (270)	13 3/4 (349)

Meets or exceeds all *ANSI* specifications

BD10ESG

BD Series Sledge Hammers (Fiberglass Handle)

- Drop forged carbon steel heads – Heat treated for durability and safety
- Fiberglass handles – Chemically bonded the sledge eyehole to withstand 8,000 lb of separation force
- Ergonomic grip – Provides a superior gripping surface, helping to dampen and absorb vibration
- Handles – Tensile strength of 200,000 lb per square inch

Stock No.	Weight, lb (kg)	Face Diameter, inch (mm)	Handle Length, inch (mm)	Overall Length, inch (mm)	Replacement Handle
BD6ESG	6 (2.7)	1 5/8 (41.1)	16 (406.4)	18 (457.2)	BD6ESG-1
BD10ESG	10 (4.5)	2 (50.8)	29 (736)	32 (812.8)	BD8ESG-1

BC4SG

BD4SG

HD4SG

Heavy Duty (Fiberglass Handle)

- Dampens vibration and provides strength and safety
- Handle is resistant to dry rot, warp and splintering
- Fiberglass handle dampens vibration and provides extra strength and safety
- Handle is epoxy welded to hammer head and will withstand 8,000 lb of separation force
- Comfortable, nonslip handle grip
- Materials will resist most shop chemicals

Stock No.	Description	Weight, lb	Striking Face Diameter, inches	Handle Length, inches	Overall Length, inches	Replacement Handle
BC4SG	Cross Peen	4	1 1/2	12	14	BD4SG-1
BD4SG	Engineer	4	1 1/2	12	14	BD4SG-1
HD4SG	Hand Drilling	4	1 1/2	8 3/4	10 3/4	HD4SG-1

BH122D

BH141A

BH133B

BH Series Heavy Duty (Hickory Handle)

- Durable handles – Will not dry rot, warp or splinter from exposure to the elements and resists most shop chemicals

Stock No.	Description	Weight, oz	Head Length, inches	Overall Length, inches	Replacement Handle
BH122D	Engineer	40	4 1/2	15	BPH40C
BH123D	Engineer	48	4 3/4	15	BPH40C
BH141A	Cross Peen	32	4 1/2	15	BPH20C
BH142A	Cross Peen	40	5	15	BPH40C
BH143A	Cross Peen	48	5 1/2	15	BPH40C
BH133B	Hand Drilling	48	4 1/2	10	BPH133

THE TOOLS OF EVERY TECH'S DREAM.

Techs love tools. But with Snap-on, there is just more to love. We make literally thousands of tools, so when techs shop Snap-on, the possibilities are endless.

THE RANGE.

It does not get any bigger than this. Snap-on offers an incredible range of products, running the gamut from entry-level tools all the way up to pro. And our product line just keeps growing; Snap-on is constantly evolving – and innovating – to outpace ever-changing industry needs.

THE BASICS.

Even our most basic tools possess a certain amount of sophistication. Over the years, we've designed – and then refined – just about everything: files, scrapers, spark plug sockets, pullers, extractors, special service tools, heavy-duty tools and more. The list is exhaustive. So, basically, we have everything you need.

HACKSAWS

HSG325

HSG319

HS5A

HS151

Hacksaw Blades

- Shatter-resistant bimetal for a long life and fast, efficient cutting

Stock No.	Length, inches	Teeth per inch
HSBM1018B	10	18
HSBM1024B	10	24
HSBM1032B	10	32
HSBM1214B	12	14
HSBM1218B	12	18
HSBM1224B	12	24
HSBM1232B	12	32

*Available in packages of ten only

Hacksaws

HSG325 Professional Hacksaw
- Ergonomic front grip for increased comfort and control
- Thermoplastic comfort grip handle
- Spring loaded tensioning mechanism for quick blade changes
- Dual blade positioning, for normal flush cutting or 55° angle
- High blade tension for straighter, more accurate and faster cuts

HSG319 Bi mold Handle Hacksaw
- Solid steel frame overmolded with soft grip for comfortable use
- Designed for 12" (300 mm) blades
- Blade tensioner discretely blends with handle
- Positions for normal flush cutting or 55° angle
- Includes HSBM1224B ten-pack blades

HS5A Mini Hacksaw
- Designed for 10" (250 mm) blades
- 8 1/4" frame fits in limited access areas
- Includes HSBM1024B 10" blade

HS151 Junior Frame Hacksaw
- Designed for 6" blades
- 9 1/2" long
- HSB632B blade included

HSM632 6" Replacement Blade (32 TPI)
- 1/4" wide, 32 teeth per inch, 6" length
- Package of five

HS50

HSEXRL

HSKIT

Quick Cutter Hand Saws

- Features contoured screwdriver type handle for a secure grip
- Saw holder keeps a tight hold on any of the three included blades
- Turn the knurled knob and easily switch blades
- All components neatly packaged in CO417 kit bag

HS50 Quick Cutter Hand Saw
- Includes: HS14X1, HS18X1 and HS24X1

HS14X1 General Purpose Blade
- For metal over 1/8", hard rubber and fiber

HS18X1 Fine Metal Cutting Blade
- For metal 18 gauge to 1/8", nail embedded wood

HS24X1 Heavy Metal Cutting Blade
- For metal 18 gauge and under trim and tubing, plus galvanized pipe under 18 gauge

HSKIT Handsaw Kit
- Ergonomic handle design reduces pressure points and stops hand from sliding
- Handle angle and position of handle to blade teeth reduces sawing forces and increases efficiency
- High quality aluminum body ensures rigidity and retaining/protecting locking mechanism
- Locking system helps reduce play between handle and blade when assembled
- Easy access to lever through handle opening
- Long lever for easy lock and release: security spring locks lever

HSEXRL Handle

HSEX16 General Purpose Blade

HSEX22 Coarse Wood Blade

SCISSORS

YA114

KER1120

Scissors

YA114 Stainless Scissors Blue-Point®
- High quality stainless-steel
- Compact: 3" long

KER1120 Taskmaster Shears
- High carbon stainless-steel blades designed to hold their edge longer and sharpen quickly
- Blades are permanently bonded to comfortable, nonslip handles
- Overall length 9"

SEK74MAK Series Specialty Knives

- Japanese AUS 8 high carbon steel provides superior cutting performance and incredible edge retention
- Modified hollow ground drop-point blade reduces resistance when cutting
- Versatile blade shape is ideal for cutting, skinning, scraping and stabbing
- Ambidextrous flipper and IKBS bearing system ensure smooth, fast opening without springs
- Friction grooves provide positive engagement of thumb or index finger when needed
- 6061 T6 cold forged anodized aluminum handle is durable, lightweight and built to withstand the abuse of a shop environment
- Liner-lock design with recessed liners and barrel spacers create a knife that is safe, strong and thin but still easy to close and clean
- Stainless pocket clip enables tip-down carry for safety and security
- Lanyard hole can be utilized for additional security when cutting

SEK74MAKG Large Wrinkle™ Knife (Green)
SEK74MAKK Large *Wrinkle* Knife (Black)
SEK74MAKO Large *Wrinkle* Knife (Orange)
SEK74MAKR Large *Wrinkle* Knife (Red)
SEK67MAKK Small *Wrinkle* Knife (Black)
SEK67MAKR Small *Wrinkle* Knife (Red)

SEK74MAKG

SEK74MAKK

SEK74MAKO

SEK74MAKR

SEK76LMN Series Specialty Knives

- Satin finish blade with laser cut Snap-on® logo
- Unique modified tanto blade is flat ground – provides a durable edge for easy cutting of tough materials in a shop environment
- Friction grooves on blade spine provide traction for thumb or index finger during cutting
- Tried and true lockback design ensures safety with an ambidextrous thumb stud for easy one-handed opening
- Unique reversible stainless-steel pocket clip for easy carry
- Nylon/fiberglass injection-molded handles are strong and extremely lightweight
  - –Nylon/fiberglass handles resist corrosive shop fluids
  - –Contoured for an ergonomic grip
  - –Slim profile for easy carry
  - –Unique checkered design offers a secure grip in any condition

SEK76LMNG Kommer Lockback Knife (Green)
SEK76LMNK Kommer Lockback Knife (Black)
SEK76LMNO Kommer Lockback Knife (Orange)
SEK76LMNR Kommer Lockback Knife (Red)

SEK76LMNG

SEK76LMNK

SEK76LMNO

SEK76LMNR

SEK86MGN Series Specialty Knives

- Unique modified Tanto-type blade shape ensures a strong tip for multiple cutting tasks
- Razor sharp non-glare bead-blasted 440C stainless steel blade
- Two-tone machined textured G-10 handle provides a secure grip and is virtually indestructible
- Liner lock construction for one-handed opening and closing
- Quick deploy flipper for easy one-handed opening
- Handy pocket clip can be customized to either a tip up or tip down, left-handed or right handed position
- Ambidextrous thumb stud
- Designed by Russ Kommer

SEK86MGNK Black Sniper Knife
SEK86MGNS Sand Sniper Knife

SEK86MGNK

SEK86MGNS

WARNING
• Keep away from children
• Read safety precautions on pages W1 to W4

CUTTING: KNIVES

SO88 Series Specialty Knives

- Equipped with a big, slightly drop-pointed blade that offers both excellent slicing and piercing capabilities
- High-performance stainless-steel blade offers excellent corrosion resistance and enhanced looks
- Lightweight machined 6061-T6 anodized aluminum handles, with Trac-Tec inserts, ensure extremely solid grip
- Equipped with SpeedSafe® knife assisted opening technology
  - –A short push on the index point overcomes the resistance built into the torsion bar in the mechanism
  - –*SpeedSafe* knife technology takes over and the blade moves out of the handle quickly and easily
- Inset Liner Lock® mechanism – an inset steel plate functions like a locking liner, in one side of the handle
  - –Upon blade deployment, the steel plate moves behind the blade securely locking it open without all the weight and bulk of full liners
- Includes reversible deep carry pocket clip so the knife can sit all the way down in the pocket

SO88G DASH Knife (Green)
SO88BLK DASH Knife (Black)
SO88O DASH Knife (Orange)
SO88R DASH Knife (Red)

LANDSCAPE TOOLS

Pruning Tools

PRN75SFS Folding Pruning Saw
- General purpose folding saw for cutting wood or plastics
- Two component plastic handles for firm grip
- Blade specially coated for low friction and rust protection
- Blade locks in both open and closed position

PRN8P Hand Pruner
- Slicing cutting action requires minimal effort
- High quality carbon steel blades with precision ground edges keep the blade sharp longer
- Glass fiber handle is lighter than aluminum yet stronger than steel
- Strong rubber bumper absorbs shock
- Smooth spring keeps blade in open position while providing minimal resistance in cutting action
- Blades can be locked in closed position

UTILITY KNIVES

Multipurpose Cutters (Blue-Point®)

YA580A Multipurpose Cutter
- Auto locking, fully retractable blade
- Metal body is black with blue cap and pocket clip
- Includes (one) premium steel 13-point snap blade
- Overall length of 5 3/8"
- Uses YA580A-1 replacement blades

YA581A Multipurpose Cutter
- Three blades with eight snap-off points
- Minimum blade wobble
- Fully retractable

YA580A-1 Replacement Blades
- Individual break-off replacement blades for the YA580A and YA584A multipurpose cutters
- Five-pack

YA581A-1 Blades
- Replacement blades for YA581A
- Ten-pack

UTK100

UTK100SB

UKBU10

UKBU50PK

LBUK1

Utility Knives

UTK100 Utility Knife
- Retractable blade
- Quick release, spring-loaded handle provides fast, sure blade changes
- Integrated hinge handle means no handle parts to lose and no tools required to change blades
- Rubber grip for comfort and control
- Three blade positions: open, half closed and closed

UTK100SB Utility Knife
- Auto retracting
- Quick release, spring loaded handle provides fast, sure blade changes
- Rubber grip for comfort and control
- Includes one safety point, two-notch blade

UKBU10 Utility Knife Blades
- Two-notch double-pointed blades (ten-pack)
- Use with UTK100, UTK100SB, UTK150, LBUK1 and LBUK2 utility knives

UKBU50PK Utility Knife Blades
- Two-notch double-pointed blades (50-pack)
- Dispenser ejects blades one at a time
- Blade guard in the ejector
- Use with UTK100, UTK100SB, UTK150, LBUK1 and LBUK2 utility knives

YA1850A Utility Knife Blades (Blue-Point®)
- 100 three-notch, double-pointed utility blades in bulk packaging

YA1800A Single Edge Razor Blades *(Blue-Point)*
- 100 blades in a plastic dispenser
- Blades have aluminum backs that can be shaped for special applications

LBUK1 Lock Back Utility Knife *(Blue-Point)*
- Folding lock back blade, hardwood handle with belt clip and thumb stud for one-hand opening
- Includes utility knife and leather pouch (both with *Blue-Point* logo) plus ten replacement blades
- Uses UKBU10 (ten-pack) or UKBU50PK (50-pack) replacement blades

CUTTING: UTILITY KNIVES

LBUK2

UTK150

Utility Knives

LBUK2 Lock Back Utility Knife (Blue-Point®)
- Thumb pad allows controlled application of pressure
- Blades are easily replaced with a flip of the switch
- Blade storage under spring-loaded door
- Includes leather pouch with belt loop plus five replacement blades
- Uses UKBU10 (ten-pack) or UKBU50PK (50-pack) replacement blades

UTK150 Auto Loading Utility Knife
- Exposed blade is easily removed or reversed with the push of a button
- New blade is auto loaded from five blade magazine
- Cushioned handle provides comfort and control
- Three blade positions: 1" and 1/4" exposures and closed
- Uses standard two-notch replacement blades

YA405A

Hobby Knife *(Blue-Point)*

YA405A Hobby Knife
- 5 1/2" long aluminum handle with bottom knurl and knurled brass nose cap
- Includes the following blades: YA405-1, YA405-2, YA405-3, YA405-4

YA405-1 23° Angle Blade
YA405-2 50° Angle Blade
YA405-3 Curved Edge Blade
YA405-4 Straight Chisel Edge Blade

KER2535

SCKS1

Knife Sharpeners

KER2535 Blade Sharpener
- Embedded with 600 grit diamond coating, bonded with nickel plating to a lightweight tube
- Length is 8.5" (20.3 cm): sheath is 5.5" (12.7 cm)

SCKS1 Carbide Knife Sharpener
- Preset angle simplifies sharpening of all blades (except serrated)
- Slip resistant rubber base pads increase steadiness in sharpening position
- Lightweight 1.7 oz
- Compact, 1.8" x 2.2" x .25"
- Strong 6061-T-6 aircraft aluminum frame
- Tungsten carbide sharpening element will sharpen the toughest blades

Comfort

SGFRD104



SGFMA104

SGFHR104

SGFMX104

Instinct®

SGHBF200A

SGHBF300A

SGHBF400A

SGHBF500A

Bastard Cut Individual Files

Additional mill file sizes are also available

	Stock No.	Uses Handle	Diameter, inches	Cut	Length, inches	SGFRD104 Comfort Grip	SGFMA104 Comfort Grip	SGFHR104 Comfort Grip	SGFMX104 Comfort Grip	SGHBF200A *Instinct*	SGHBF300A *Instinct*	SGHBF400A *Instinct*	SGHBF500A *Instinct*
Round Files	6R*	SGHF614BR	7/32	—	6					•			
	8R*	SGHF614BR	9/32	—	8					•			•
	10R*	SGHF615BR	3/8	—	10					•			
	12R*	SGHF616BR	1/2	—	12					•			
	SGF6R	–	—	—	6	•							
	SGF8R	–	—	—	8	•			•				
	SGF10R	–	—	—	10	•							
	SGF12R	–	—	—	12	•							
Mill Files	6MA*	SGHF614BR	—	5 1/2	6						•		
	8MA*	SGHF615BR	—	7 1/2	8						•		•
	10MA*	SGHF616BR	—	9 1/2	10						•		•
	12MA*	SGHF617BR	—	11 1/2	12						•		
	14MA*		—	13 1/2	14								
	SGF6MA	–	—	—	6		•		•				
	SGF8MA	–	—	—	8		•		•				
	SGF10MA	–	—	—	10		•						
	SGF12MA	–	—	—	12		•						
Half Round Files	6HR*	SGHF614BR	—	—	6							•	
	8HR*	SGHF615BR	—	—	8							•	
	10HR*	SGHF616BR	—	—	10							•	
	12HR*	SGHF617BR	—	—	12							•	
	SGF6HR	–	—	—	6			•					
	SGF8HR	–	—	—	8			•					
	SGF10HR	–	—	—	10			•					
	SGF12HR	–	—	—	12			•					
Three Square File	6T*	SGHF614BR	—	5 1/2	6								•
	SGF6T	–	—	6	6				•				
	10T*	SGHF616BR	—	9 1/2	10								
Instinct Handles	SGHF614BR	–	—	—						2	1	2	2
	SGHF615BR	–	—	—						1	1	1	1
	SGHF616BR	–	—	—						1	1	1	1
	SGHF617BR	–	—	—							1		
Kit Bag						PAKKB069	PAKKB069	PAKKB069	PAKKB069	C0413A	C0413A	C0413A	C0413A

*Handle ordered separately

Miniature Files

Stock No.	Description	SGFMN106 Set Contains:
SGF4MA	Hand	•
SGF4W	Warding	•
SGF4HR	Half Round	•
SGF4SQ	Square	•
SGF4R	Round	•
SGF4T	Triangular, Slim Taper	•

SGFMN106

⚠WARNING

- Keep away from children
- Read safety precautions on pages W1 to W4

FILES

HBFN120A

Swiss Needle

HBFN120A Set
- 12 needle files with round, knurled handles
- Each is 5 1/2" long and "0" cut for coarse filing
- Packaged in a plastic pouch

HF611A File Handle
- Plastic screwdriver collet style handle for holding individual files in HBFN120 set

Stock No.	Description
5NRA	Round
5NHRA	Half Round
5NFA	Flat
5NCA	Crossing
5NKA	Knife
5NSQA	Square
5NTSB	3 Square
5NEA	Equaling
5NBA	Barrette
5NJA	Joint
5NSA	Slitting
5NMA	Marking

6T

3 Square Files

6T 6" long, 5 1/2" cut length.
10T 10" long, 9 1/2" cut length.

6CR

Single Cut Chain Saw Files

6CR 6" long, 5/32" diameter. Uses HF611A file handle.
8CR 8" long, 7/32" diameter.



10FMK

Multicut Flat File

10FMK Multicut Flat File
10" long.

ACCESSORIES

SGHF616BR

Soft Grip Handles

- For all bastard cut files that use replacement soft grip handle
- Feature twist-on threads for securely holding files

Stock No.	For Files
SGHF614BR	4MA, 6CR, 6R, 6T, 6MA, 6HR, 8CR, 8R
SGHF615BR	8T, 8MA, 8HR, 10R
SGHF616BR	10T, 10MA, 10HR, 12R
SGHF617BR	12MA, 12HR

GA613

Wooden Twist-on Handles

- Wooden twist-on handles with case hardened, threaded steel inserts
- Use on all bastard cut files on this page

Stock No.	For Files
GA613	4MA, 8CR, 6R
GA614	6T, 6MA, 6HR, 8R
GA615	8T, 8MA, 8HR, 10R
GA616	10T, 10MA, 10HR, 12R
GA617	12MA, 12HR
GA618	14MA, 16MA

GA98A

GA98A Plastic Adjustable Jaw Handle (Blue-Point®)

- Provides a large, comfortable grip for all bastard cut files
- Adjustable jaws grip the file so it can't turn
- Use on files 4"–16" long
- 4 1/2" long, 1" in diameter, 3/8" maximum opening

YA337A

YA337A File Cleaner

- Bristle area of 3 1/2" x 1 1/2" with .013" (33 ga.) wire
- Wooden handle
- 7 1/2" long

SCRAPERS AND PUTTY KNIVES

PKN90

PKNG90

Large Surface Scrapers

PKN90 Non-marring Large Scraper
- Glass reinforced nylon offers great blend of flexibility and strength
- Non-marring composite material will not scratch soft metals, paint or composites
- Large handle for easy grip
- Ideal for use on cylinder blocks or other large gasket mating surfaces
- Removal of corrosion on flat metals (aluminum, steel, etc.) with suitable etch cleaners and rust removal solutions, primer preparation and cleaning of stainless steel surfaces
- Can be used with suitable chemicals in removal of paint coatings, gel coats, etc.
- Ideal for lacquer/paint stripping and final smoothing on wood surfaces

PKNG90 Glass/Acrylic Large Scraper
- Designed for use on glass and acrylic surfaces
- Will not scratch those surfaces like metal tools
- Large handle for easy grip
- Orange color to visually identify difference from black nylon glass-filled products
- Works well when removing dirt/debris, windshield decals, adhesive mounts for mirrors, dealer sticker removal, tree sap, algae removal from fiberglass boats, and during the removal of window tinting

PKNC300

PKNC301

Striking Scrapers

- Striking cap is designed for hammering
- Heavy duty blade extends through the handle and meets the cap to equally distribute the striking force
- Thick, polished, high carbon steel for durability
- Ergonomic soft grip handle for secure grip when striking
- Can be used as a chisel or scraper

Stock No.	Description	Blade Width, inches	PKNC301	PKNC300
PKNC150	Single Bevel	1 1/2		•
PKNC125C2	Dual Bevel	1 1/4		•
PKNC200	Single Bevel	2		•
PKNC050	Single Bevel	1/2	•	
PKNC075C2	Dual Bevel	3/4	•	
PKNC075	Single Bevel	3/4	•	

Set Contains:

PKNC125C2 Striking Scraper (1 1/4")
Dual bevel design for two distinct blade lengths.

PSN500

PKN500

Non-marring Tool Sets

- Unique selection of tip profiles for numerous prying, scraping, aligning, cutting and shielding applications
- Includes a cloth kit bag to organize and store tools
- Intended for general automotive use
- Do not use on surfaces such as glass or clear acrylics
- Glass-reinforced nylon provides strength
- Lightweight and resistant to most automotive fluids
- Useable with hammers (block end/tap into position)
- Avoids scratching or gouging of soft materials

Stock No.	Blade Style/Tip Profile	Blade Width, inches	PKN500	PSN500
PKN1	Straight Blade	7/8	•	
PKN2	Straight Blade	1 1/4	•	
PKN3	Curved Blade	1 1/8	•	
PKN4	Angle Blade	3/4	•	
PKN5	Curved Blade	5/8	•	
PBN10	90° L	—		•
PBN11	Narrow Wedge	—		•
PBN12	Curve Cup	—		•
PBN14	Narrow Point	—		•
PKN7	Curve Tube	—		•
Kit Bag			C0100	C0100

Set Contains:

CSA300AR

CSA8CO

Rigid Carbon Scrapers

- 1/4" square shanks are flared to form scraping edge
- Classic screwdriver type handle

Stock No.	Handle Color	Length, inches	Blade Width, inches	Blade Style	CSA300A	CSA300AO	CSA300AR
CSA8C	Black	7 5/8	7/8	Straight	•		
CSA8CO	Orange	7 5/8	7/8	Straight		•	
CSA8CR	Red	7 5/8	7/8	Straight			•
CSA12C	Black	12 7/8	1	Straight	•		
CSA12CO	Orange	12 7/8	1	Straight		•	
CSA12CR	Red	12 7/8	1	Straight			•
CSA14C	Black	14 1/8	1 1/2	Straight	•		
CSA14CO	Orange	14 1/8	1 1/2	Straight		•	
CSA14CR	Red	14 1/8	1 1/2	Straight			•

Set Contains:

USS103

Knife Blade Scrapers (Blue-Point®)

- Remove gaskets, sealers and other caked-on materials
- Blade edge designed to work effectively in both push and pull directions
- Stainless steel blades for durability
- Polished blades clean up easily
- Comfortable composite handles feature a contour thumb stop for maximum control and a wide hilt for control

Stock No.	Blade Style	Blade Length, inches	Length, inches	USS103
US710	Spoon	3 3/8	8	•
US711	Chisel Tip	2 1/2	7 1/8	•
US712	Oyster	2 1/8	6 3/4	•

Set Contains:

WARNING
• Keep away from children
• Read safety precautions on pages W1 to W4

SCRAPERS AND PUTTY KNIVES

PK500A

Putty Knives/Scrapers (Blue-Point®)

- Full length steel blades for strength and durability
- Soft molded rubber handles maximize hand grip, are easy to clean and resistant to most solvents
- Broad hilt design helps protect against hand slipping when scraping

Stock No.	Blade Length, inches	Blade Width, inches	Blade Style	Edge	Set Contains: PK500A
PK50A	3 1/2	2	Flexible	Straight	•
PK52A	3 19/32	1 1/4	Flexible	Straight	•
PK53A	3 19/32	1 1/4	Stiff Chisel	Single Bevel	•

PKB500A

Brass Putty Knives/Scrapers *(Blue-Point)*

- Spring-tempered, solid brass blades are non-marring, non-sparking, non-magnetic and non-corrosive
- Soft molded rubber handles maximize hand grip, are easy to clean and are resistant to most solvents
- Broad hilt design helps protect against hand slipping when scraping
- Stiff blade style

Stock No.	Handle Length, inches	Blade Length, inches	Blade Width, inches	Blade Style	Edge	Set Contains: PKB500A
PKB50A	4 7/8	3 1/2	2	Stiff	Straight	•
PKB52A	4 7/8	3 19/32	1 1/4	Stiff	Straight	•
PKB53A	4 7/8	3 19/32	1 1/4	Stiff	Single Bevel	•

PKWHD53A

Walnut Handled Scrapers *(Blue-Point)*

- Quality crafted for hard scraping applications
- Walnut wood handle for comfort
- Full length heavy duty blades for strength
- Large steel cap for striking capability
- Remove gaskets, sealants and body weld breakaway

Stock No.	Blade Length, inches	Blade Width, inches	Blade Style	Edge	Length, inches	Set Contains: PKWHD53A
PKWBS53A	3	1 1/4	30° Bent	Chisel	7 1/2	•
PKWLR53A	5 1/2	1 1/4	Straight	Chisel	9 1/2	•
PKWSS53A	2 3/4	1 1/4	Straight	Chisel	6 3/4	•

PK23A

Maple Handle Putty Knife *(Blue-Point)*

- Mirror finished hardened steel blade extends through hardwood handle, solidly riveted for durability
- Maple handle has metal bolster where handle meets blade

Stock No.	Handle Length, inches	Blade Width, inches	Blade Style	Edge
PK23A	3 7/8	1 1/4	Heavy Chisel	Single Bevel

CS1

PK70

MS3000

PKRS1

Scrapers

CS1 Flexible Wire Carbon Scraper
- Ten blades made of oil tempered spring steel
- Sliding ferrule is used to adjust to the required flexibility

PK70 Multipurpose Scraper *(Blue-Point)*
- Use for gasket removal, deburring, car body work and rust removal
- Durable tungsten carbide blades
- Ergonomic handle reduces fatigue
- Thumbgrip allows precision scraping

PK70TRI Replacement Blade
For PK70.

PK70ROUND Replacement Blade
For PK70.

PK70DROP Replacement Blade
For PK70.

PK70PEAR Replacement Blade
For PK70.

MS400 Compact Scraper (4") *(Blue-Point)*
- Removes stickers, molding paint and decals
- Use with standard, single edge steel or plastic razor blades
- Quick and easy blade changes
- Angled head provides maximum leverage
- 4" long

MS800 Standard Scraper (8") *(Blue-Point)*
- Same as MS400 except 8" long

MS1300 Long Scraper (13") *(Blue-Point)*
- Same as MS400 except 13" long

MS3000 Scraper Set *(Blue-Point)*
- Includes MS400, MS800, MS1300 and MSRPACK5 in storage case

PKRS1 Ergo Grip Razor Scraper *(Blue-Point)*
- Three blade positions: closed, open and loading
- Rubberized contour grip provides comfort and a sure gripping surface
- Uses YA1800 Replacement Blades

Cutters

VGP18210 Chain Pipe Cutter
- Quickly and easily cuts exhaust pipes with 13 alloy cutting wheels in chain
- Cuts stainless-steel, copper and PVC piping from 15 mm up to 75 mm (19/32"–2 15/16") in diameter, up to 2.6 mm (3/32") wall thickness
- Locking mechanism helps avoid lateral movement and misaligned cutting
- Large butterfly screw allows application of greater force to cutting wheels with each series of cut

VGP18210-1 Replacement Chain
- For VGP18210

TC90A Tail Pipe Cutter
- Handles on the car cutting from 3/4"–3 1/2" diameter
- 16-link cutter chain is 12" long
- Threaded shaft with cross piece provides elasticity to help prevent chain wheels from breaking
- Ideal for cutting the strut assembly to enable servicing of the strut cartridge

TC90A1 Chain Assembly
- Includes one wheel and one roll pin

VGP18210

TC90A

Exhaust Tools

YA1300 Manifold Jack (set of 2)
- Use to expand manifold to its original shape and bolt hole alignment
- Use with a 3/4" open end wrench

YA3202 Exhaust Hanger Removal Pliers
- Remove hanger brackets from rubber mounting straps by placing jaw behind rubber grommet ring and forcing pin of pliers on the end of steel hanger
- When handles are squeezed, the forcing pin pushes the ring off the hanger
- 14" long

YA1300

YA3202

Expanders

PH800 Tailpipe Expander with Collets
- Simple and convenient set for tailpipe expansion jobs
- Using an impact wrench the pipe stretcher is a convenient, inexpensive alternative to hydraulic pipe expander
- Can be used right on the vehicle
- Includes PH300 and five aluminum collets
- Expands from 1 5/8"–4 1/4"
- Includes molded storage case

PH300 Tailpipe/Exhaust Stretcher
- Stretches all types of exhaust pipe, including stainless steel, from 1 5/8"–2 7/16"
- Use with an impact wrench

CG5560HY Hydraulic Tailpipe/Exhaust Stretcher Conversion Kit
- Converts PH300 tailpipe/exhaust stretcher to the convenience and power of hydraulic operation
- Includes the CG122 10 ton hydraulic ram and pump set and hydraulic cone adaptor

CG5560 Tailpipe/Exhaust Stretcher Conversion Kit
- Add to CG122 10 ton hydraulic ram and pump set to add hydraulic power to the PH300
- Includes exhaust pipe and instructions

PH800

PH300

CG5560HY

TUBING, CUTTERS, FLARING AND BENDING

TC15A

TC28C

TC123C

TC123CR

TC25A

TBS100

TBS200A

TBS300

GA244

Cutters

TC15A Ratcheting Cutter
- Ratchet action allows cutting all the way around the tubing by simply pumping the handle
- Handles 1/8"–3/8" O.D. copper, plastic and PVC tubing
- Ideal for fuel, vacuum and air conditioning applications
- 3 7/8" long

TC15-7C Cutting Wheel
- Standard replacement cutting wheel for TC15A tube cutter

TC15-HSS Small Cutting Wheel
- High speed steel cutting wheel

TC28C Tubing Cutter (Blue-Point®)
- Cuts soft metal tubing ranging from 1/8"–1" in diameter
- O.D. capacity is 1/8"–1 1/8"
- Micrometer type adjustment
- Retractable locking reamer blade
- Cutter wheel is easily replaceable

TC28C1 Cutting Wheel
- Extra cutter wheel for TC28C

TC123C Tubing Cutter *(Blue-Point)*
- Handles tubing from 1/8"–5/8" O.D.
- Can be used where clearance around tubing is less than 1 3/8"
- 1 1/2" long when closed and 2" long when open; feed knob is 7/8" in diameter

TC123CR Ratcheting Tube Cutter *(Blue-Point)*
- TC123C cutter and TC123CRH handle combined into one unit

TC123CRH Ratcheting Tube Cutter Handle
- Handle for TC123C tube cutter

TC123C1 Cutting Wheel
- Extra cutter wheel for TC123C

TC25A Ratcheting Cutter *(Blue-Point)*
- Designed for automotive, plumbing, air conditioning, marine, chemical laboratories, refineries and hydraulic industries
- Cuts steel, copper, brass, aluminum, plastic and PVC sizes 5/16"–1 1/8" diameter
- Ratcheting tube cutter with unique spring loaded action mechanism allows one or two tightening adjustments to complete the cut in very hard-to-reach places
- Ratchet motion allows operation in close quarters
- High-impact fiberglass handle is strong and lightweight

Bending Tools

TBS100 Tubing Bender
- Bends tubing up to 1/4" O.D.
- Bends copper, brass, bundy weld, noncoated brake lines and more
- Comfort grip handle
- 7" long

TBS200A Multipurpose Tubing Bender *(Blue-Point)*
- Makes left, right or offset bends up to a 90° angle
- Degrees shown for accurate bending angle
- Handles 3/16", 1/4", 5/16" and 3/8" (4 mm, 6 mm and 8 mm) O.D. aluminum, copper and stainless steel tubing
- Aluminum unit is 8 1/4" long when opened

TBS300 Tubing Bender *(Blue-Point)*
- Easily bend 1/4, 5/16 and 3/8" O.D. soft copper or aluminum tubing up to 180°
- Degrees, in 15° increments, noted on tool for accurate bends
- Pull lever to easily disengage tool after bending
- Cushioned handles provide comfort and control, even with greasy hands
- Offset handles provide hand clearance when making 180° bends
- Lightweight, die cast aluminum construction
- Overall length is 10 1/2"

GA244 Tubing Bender
- Allows smooth bend without denting tubing
- Makes bends to 180° and 13/16"
- Handles 3/16", 1/4" and 5/16" O.D. steel and copper tubing
- Reversible forming pad
- Polypropylene posts minimize friction

TF528D

TF5A

TF275A

TFM428

Flaring Tool Sets (Blue-Point®)

TF528D Tube Cutting and Double Flaring Set
- Contains TC28C tubing cutter and a double flaring set with a flaring bar, rod handle, yoke and five adaptors: 3/16", 1/4", 5/16", 3/8" and 1/2" and storage case

TF5A Double Flaring Tool Set
- Makes double or single flares on soft steel, brass or aluminum tubing from 3/16"–1/2" O.D.
- Makes a smooth fitting, crack-free 45° flare
- Set includes five adaptors, yoke assembly, bar assembly and handle
- Storage case included

TFM5A Metric Double Flaring Tool Set
- Same design as TF5A except it is for tubing with an O.D. from 4.75 mm–10 mm
- Set includes yoke, bar assembly, handle and five adaptors: 4.75 mm, 5 mm, 6 mm, 8 mm and 10 mm

TF275A Flaring and Swaging Set
- 45° flare or swage soft copper, brass or aluminum tubing
- Die blocks handle 1/8", 3/16", 1/4", 5/16", 3/8", 7/16", 1/2", 5/8", and 3/4" O.D. tubing
- Swages 3/16", 1/4", 5/16", 3/8", 1/2", 5/8" and 3/4" O.D. tubing
- TF275PB storage case included

TFM428 Metric Bubble Flaring Set
- For automotive brake systems
- Designed for crack-free bubble flares on soft wall tubing up to a wall thickness of .028"
- Adaptors included for 4.75 mm, 6 mm, 8 mm and 10 mm flares
- TFM428PB storage case included

TFM428PB Plastic Box

TFL500

TFL500 and TFL800 Flaring Kit
- Use with a ratchet to make consistent flares faster and easier
- Makes double flares on 3/16" and 4.75 mm tubing
- Low-profile design allows for use on or off the car
- In-line design makes a more accurate flare
- Double clamp and hex screw design keeps tubing locked tightly in position
- For use on thin walled steel and copper tubing

TFL800

TFLM800 Flaring Kit
- Use with a ratchet to make consistent flares faster and easier
- Makes double flares on 4.75 mm, 5 mm and 6 mm tubing
- Low-profile design allows for use on the car or off
- In-line design makes a more accurate flare
- Double clamp and hex screw design keeps tubing locked tightly in position
- For use on thin walled steel and copper tubing

TFLM800

WARNING • Read safety precautions on pages W1 to W4

SPARK PLUG SERVICE TOOLS

YA824C

YA824ASTR

SBP5

SBP3

YA8230

Boot Pliers

YA824C Spark Plug Boot Pliers
- 45° offset jaws
- Vinyl coated jaws and handles assure gripping ability
- Use only on automotive type ignition systems
- 9 1/2" long

YA824ASTR Boot Pliers
- Straight jaw version of YA824C
- 9 3/4" long

SBP5 Boot Pliers
- Five positions for easy access to restricted spark plugs
- Internal spring keeps pliers in the open position
- Vinyl coated jaws and handles
- Black industrial finish
- 10" long

SBP3 Boot Pliers
- Vinyl coated offset jaw tips will pull most US and import spark plug boots, including the back plugs on late model Porsche® and Mercedes-Benz® vehicles
- Vinyl covered handles are cushioned for comfort

YA8230 Valve Stem Seal Pliers
- Removes valve stem seals from overhead camshaft engines including four valve-per-cylinder engines that have restricted access to the valve stem seal
- Gripping serrations in the pliers tip easily grab both OEM and aftermarket seals with ease
- Easy-grip handles

FSPK

FSPPRK

Spark Plug Extractors

FSPK Spark Plug Extractors
- Removes broken spark plugs from cylinder head on Ford® Triton 5.4 L three-valve engines, 4.6 L engines and 6.8 L engines without removing head

Stock No.	Description	Set Contains: FSPK
FSPK1	Barrel	•
FSPK2	Threaded Shaft	•
FSPK3	Nut	•
FSPK4	Thrust Washer	•
FSPK5	Vinyl Cap	•
T910M	Metric Tap	•

Optional Tap Holder TDL8-10

Porcelain Extractors

FSPPRK Porcelain Extractor Set
- Used in combination with FSPK spark plug extractor kit for use on *Ford* vehicles to remove any porcelain left behind from the process of extracting the plug
- Tool does not push the porcelain through the sleeve, preventing engine damage
- Four cylinders can be worked on at one time to save time and money
- Set includes porcelain repair kit for use on *Ford* vehicles, pins (10 pack), special Loctite® 680 adhesive (5 mL) to remove broken porcelain, clean out wire and blow molded storage case

Applications (engines covered):
4.6 L V8 2005–2008 (*Ford* Mustang, Explorer, Mercury® Mountaineer); 5.4 L V8 2004–2008 (*Ford* F150, F250 Super Duty, F350 Super Duty, E450 Super Duty, Expedition, Lincoln® Navigator, Mark LT); 6.8 L V10 2005–2008 (*Ford* F250 Super Duty, F350 Super Duty, F450 Super Duty, F550 Super Duty, E450 Super Duty, E450 Econoline)

FSPPRK1 *Ford* Porcelain Repair Kit washer, center screw, guide, hex nut, end nut

FSPPRK2 Pins (10pk)

FSPPRK3 *Loctite* (680, 5 mil.)

FSPPRK4 Clean Out Wire

FSPPRKB Storage Case

SPARK PLUG SERVICE TOOLS

YA832A

YA840

HB5PK

FRT10

FRT12

YA6845

Spark Plug Tools

YA832A Spark Plug Firing Indicator (Blue-Point®)
- Test spark plugs, coils and distributors on breaker point and electronic ignition systems
- Blunt nose tip prevents lead puncturing
- High intensity bulb and viewing window for greater flash concentration
- 4 3/4" long

YA840 In Line Spark Tester *(Blue-Point)*
- Quickly diagnose ignition systems
- Works on all ignition systems including distributorless ignitions
- Status of indicator light shows if problem exists in the ignition system or fuel system

HB5PK Spark Plug File Set
- Fine, single cut tungsten file for smoothing or cleaning spark plug and other contact points
- Includes (two) HB5 spark plug files

FRT10 Spark Plug Insert Installer Set *(Blue-Point)*
- Repairs damaged heads from blown spark plugs with an alloy steel insert in as little as 15–45 minutes
- Services modular cylinder heads on Ford® vehicles 4.6 L, 5.4 L and 6.8 L
- Set Includes tap, Core Drill, Guide, Storage Case, Instructional DVD and Spark Plug Insert

FRT12 Three Valve Insert Kit for *Ford* Vehicles *(Blue-Point)*
- Repair cylinders without removing the head
- Custom guide, tap and drill for quick and simple repair of damaged threads
- Unique insert installer makes the job quick and easy
- Works on three-valve 5.4 L and 6.8 L engines built before 10/9/2007
- Also works on three-valve 4.6 L engines built before 11/30/2007 found on many 2004–2008 *Ford*, Lincoln® and Mercury® vehicles
- Set includes Tap, Core Drill, Guide, Insert Installer, Insert and Storage Case

YA6845 Spark Plug Boot Remover
- For use on ripped or stuck spark plug boots
- Easily saves time as it is awkward to use a pliers to try to get the stuck boot off, especially when the spark plug is in a recessed or confined area where vision is limited
- Made from high quality heat-treated steel
- High-tech black finish

Applications for *Ford* vehicle:
4.6 L V8 two valve heads (1997–1999); 4.6 L V8 two valve heads (2000 and later); 4.6 L V8 three valve heads (2007 and later); 5.4 L V8 two valve heads (1997–2004); 5.4 L V8 three valve heads (2005 and later); 6.8 L V10 two valve heads (1999–2008); 6.8 L V10 three valve heads (2008 and later)

Applications for Chrysler® vehicle:
3.7 L V6 2 valve heads (2005 and later); 5.7 L V8 Hemi 2 valve heads (2004 and later)

Other Applications:
Applications where the diameter of the porcelain on the spark plug is smaller than 0.432 of an inch.

FLANK DRIVE® SPARK PLUG SOCKETS



S9721A



FSXK320A

Double Swivel (3/8" Drive), inches
- Use double swivel universals for rear spark plug removal or installation on transverse V6 engines

	6	C	Rubber Insert
5/8	S9721A	4 13/16	S9706KARI

Flexible Extension (3/8" Drive), inches

	6	B	C	Rubber Insert
5/8	FSXK320A	2 15/32	5 11/32	S9706KARI

⚠WARNING
- Do not use chrome or industrial finish hand tools with impact drivers
- Read safety precautions on pages W1 to W4

FLANK DRIVE® SPARK PLUG SOCKETS

S9706KFUA

S9706KFUAMAG

S9710C

Universal (3/8" Drive)

#	6	A	B	C	Rubber Insert
13/16"	S9704KFUA	3/8	13/16	3 9/16	S9705A2
5/8"	S9706KFUA	3/8	5/8	3 23/32	S9706KARI
14 mm	S9714MKFUA	3/8	25/32	3 1/8 (79.5)	–
9/16"	S9716KFUA	3/8	3/4	2 15/16	S9714MK-2
5/8"	S9706KFUAMAG	3/8	27/32	3 3/4	–

Ball Joint Swivel (3/8" Drive), inches

11	6	C	Rubber Insert
13/16	S9709KB	3 25/32	S9705A2
5/8	S9710KC	3 25/32	S9706KARI

Magnetic (3/8" Drive), inches

#	6	B	C
9/16	S9716KLMAG	25/32	5 7/8
5/8	S9706KMAG	11/16	2 19/32
13/16	S9704KMAG	11/16	2 11/16
14 mm	S9714MKMAG	19.6	57.2

S9706KMAG

S9716KR

S9706KRFUA

S9704KR

S9714MKR

Retention Spark Plug Sockets (3/8" Drive)

- Patented tapered hex design (U.S. Patent #6,626,067)
- Securely retains spark plug in socket without rubber insert or magnet
- Patented "Diamond Wedge" design with six wedges equally align plug in the center to avoid damage to the porcelain
- Spark plug is easily disengaged by applying gentle side pressure
- Spark plug socket configuration is cold formed for extended tool life
- External hex on standard models for restricted access applications
- Knurled surface for finger tightening/removal
- Side through hole for secure extension retention for coil on plug applications

Applications: 4.7 L engines used on Jeep® Commander and Grand Cherokee®, Dodge® Ram, Durango and Dakota plus Chrysler® Aspen vehicles. General applications on autos, light trucks, motorcycles and power equipment.

#	6	A	B	C
9/16"	S9716KR	5/8	25/32	2 3/8
5/8"	S9706KRFUA	—	27/32	3 3/4
5/8"	S9706KRA	11/16	27/32	2 7/8
13/16"	S9704KR	7/8	1 1/16	2 27/32
14 mm	S9714MKR	16 mm	19.6 mm	60.3 mm

ANSI® B107.34M

S9706KRA/S9706KRFUA

S9716KR Applications: 2005 Ford® Mustang (4.6 L, three-valve engine) and *Ford* 2004 F150 (5.4 L V8, three-valve engine)

S9714MKR Applications: 14 mm spark plugs used in Nissan® 1.8 L Versa® and 2.0 L Sentra, Mercedes® and BMW® vehicles

S9720KA

Extra Deep (3/8" Drive), inches

11	6	C	Rubber Insert
13/16	S9719KA	5 7/8	S9719-2A
5/8	S9720KA	5 31/32	S9706KARI
9/16	S9716KL	5 7/8	S9714MK-2

Special Application



S9723 Offset Spark Plug Socket
- 5/8" offset spark plug socket for limited access situations
- Remove/install the spark plug on the #3 cylinder without interference from the steering column on GM® 4.3 L V6 engines used in GMC® Jimmys, Chevy® Blazers, S10 and S15 pickup trucks (1994–2004) plus Oldsmobile® Bravadas (1996–2001) vehicles
- Use with 11" extension
- 12-point *Flank Drive* wrenching system
- Industrial black finish
- 11/2" length, 1 3/4" height, 3/8" drive

S9723

S9724RHS Low-Profile Spark Plug Socket
- Low-profile socket easily reaches 5/8" (16 mm) spark plugs on muscle cars, ATVs, motorcycles and boats without interference from custom exhausts or chassis
- Spark plug extends through the socket for access in tight quarters
- Patented tapered hex design retains spark plug securely without rubber insert or magnet
- Spark plug is easily disengaged from socket by applying side pressure
- Use ratcheting box wrench on 5/8" external hex drive
- 11/16" length

S9724RHS

Applications:
Harley-Davidson® motorcycles with large gas tanks (1986 and later Sportster® and 1999 and later twin cam models) plus small block *Chevy*, Ford® and Mopar® vehicles and other engines with 5/8" (16 mm) spark plugs and racing exhaust headers

S9704RHS Low-Profile Spark Plug Socket
- Low-profile socket easily reaches 13/16" spark plugs on muscle cars, ATVs, motorcycles, RVs and boats without interference from custom exhausts or chassis
- Spark plug extends through the socket for access in tight quarters
- Patented tapered hex design retains spark plug securely without rubber insert or magnet
- Spark plug is easily disengaged from socket by applying side pressure
- Use with open end or ratcheting box wrench on 13/16" external hex drive
- 11/4" length

S9704RHS

Applications:
Small or big block *Chevy*, *Ford* and *Mopar* vehicles and other engines with 13/16" spark plugs and racing exhaust headers

Standard (3/8" Drive), inches

	6	A	B	C	Rubber Insert
9/16	S9716KA*	5/8	23/32	2 1/8	S9714MK-2
5/8	S9706KA*	3/8	27/32	2 27/32	S9706KARI
3/4	S9718KA*	3/8	31/32	2 13/32	S9705A2
13/16	S9704KA*	3/8	7/8	2 3/4	S9705A2
7/8	S6106KA**	3/8	7/8	3 13/64	S6106-2R

*ASME®/ANSI® B107.34M
**Designed for aircraft applications

S9716KA

S9706KA

S6106KA

Standard (3/8" Drive), mm

mm	6	12	A	B	C	Rubber Insert
18 mm	S9711KA	–	11/16	24.3	66.9	S9706KARI
14 mm	–	S9714MK	5/8	18.0	60.3	S9714MK-2
14 mm	S9714MKL	–	19.0	19.6	149.2	S9714MK-2

ASME/ANSI B107.34M

S9711KA

S9714MK

S9714MKL

SPARK PLUG SOCKETS Blue-Point®

Spark Plug Sockets, inches

	6	Length
5/8	BLPSPS3858	2 9/16
13/16	BLPSPS381316	2 1/4

BLPSPS3858

BLPSPS381316

⚠WARNING

- Do not use chrome or industrial finish hand tools with impact drivers
- Read safety precautions on pages W1 to W4

THREAD RESTORING: RETHREADING TAPS AND DIES

RTD48

RTD48 US/Metric Master Rethreading Kit
- Includes taps and dies
- Also includes TF1124B and TFM7530B thread restorer files
- All components stored in storage case (48pc)

TRF3

TRF3 US Rethreading Tap Set (NF)
- Includes six NF taps and 12 NF dies (18pc)
- Black finish

TRC3

TRC3 US Rethreading Tap Set (NC)
- Includes six NC taps and 12 NC dies (18pc)
- Silver finish

RTD15M

RTD15M Metric Rethreading Tap & Die Set
- Includes seven metric dies and seven metric taps (14pc)
- Gold finish

Rethreading Tap and Die Set Components

	Size, inches (mm)	Stock No.	RTD48	TRC3	TRF3	RTD15M
NC Rethreading Taps	1/4–20	TRT2520A	•	•		
	5/16–18	TRT3118A	•	•		
	3/8–16	TRT3716A	•	•		
	7/16–14	TRT4314A	•	•		
	1/2–13	TRT5013A	•	•		
	9/16–12	TRT5612A	•	•		
NF Rethreading Taps	1/4–28	TRT2528A	•		•	
	5/16–24	TRT3124A	•		•	
	3/8–24	TRT3724A	•		•	
	7/16–20	TRT4320A	•		•	
	1/2–20	TRT5020A	•		•	
	9/16–18	TRT5618A	•		•	
Metric Rethreading Taps	(M6 x 1)	TRT51	•			•
	(M8 x 1.25)	TRT53	•			•
	(M10 x 1.5)	TRT54	•			•
	(M10 x 1.25)	TRM1025-2	•			•
	(M12 x 1.75)	TRT55	•			•
	(M12 x 1.5)	TRT56	•			•
	(M12 x 1.25)	TRT57	•			•
	(M10 x 1.00)	TRT101	•			
	(M11 x 1.50)	TRT11150	•			
	(M14 x 1.50)	TRT14150	•			
NC Rethreading Dies	1/4–20	TR2520A	•	•		
	5/16–18	TR3118A	•	•		
	3/8–16	TR3716A	•	•		
	7/16–14	TR4314A	•	•		
	1/2–13	TR5013A	•	•		
	9/16–12	TR5612A	•	•		
	5/8–11	TR6211A	•	•		
	3/4–10	TR7510A		•		
	7/8–9	TR8759A		•		
	1–8	TR10008A		•		
	1 1/8–7	TR11257A		•		
	1 1/4–7	TR12507A		•		
NF Rethreading Dies	1/4–28	TR2528B	•		•	
	5/16–24	TR3124B	•		•	
	3/8–24	TR3724B	•		•	
	7/16–20	TR4320B	•		•	
	1/2–20	TR5020B	•		•	
	9/16–18	TR5618B	•		•	
	5/8–18	TR6218B	•		•	
	3/4–16	TR7516A			•	
	7/8–14	TR8714A			•	
	1–14	TR10014A			•	
	1 1/8–12	TR11212A			•	
	1 1/4–12	TR12512A			•	
Metric Rethreading Dies	(M6 x 1)	TDM51B	•			•
	(M8 x 1.25)	TDM53B	•			•
	(M10 x 1.5)	TDM54B	•			•
	(M10 x 1.25)	TRM1025-1	•			•
	(M12 x 1.75)	TDM55B	•			•
	(M12 x 1.5)	TDM56B	•			•
	(M12 x 1.25)	TDM57B	•			•
	(M10 x 1.00)	TR101	•			
	(M11 x 1.50)	TR11150	•			
	(M14 x 1.50)	TR14150	•			

THREAD RESTORING: FILES AND THREAD CHASERS

TFTFM932A Thread Restorer File Set
- Includes three commonly needed files
- Files feature a black industrial finish and comfortable vinyl handles
- Files service a range of 9–32 threads per inch and 0.75 mm–3 mm pitches
- Includes TFTFM932-1 vinyl kit bag for storage

TF1124B Thread Restorer File
- For any diameter right or left hand threads
- Removable vinyl handles

TF1124B 11, 12, 13, 14, 16, 18, 20 and 24 threads per inch

TF1127B 9, 10, 12, 16, 20, 27, 28 and 32 threads per inch

TFM7530B Pitches: .75 mm, 1 mm, 1.25 mm, 1.50 mm, 1.75 mm, 2 mm and 3 mm

TFTFM932A

TF1124B

THREAD CHASERS

TR20C

TR21A

TR25B

U.S. Thread Chaser Sets

	Stock No.	Threads/inch & Pitch (mm)
U.S. Chaser	TR20-10	4 & 5
	TR20-11	6 & 7
	TR20-12	8 & 9
	TR20-32	8R & 10R
	TR20-13	10 & 11
	TR20-14	11 1/2 & 12
	TR20-15	13 & 14
	TR20-16	16 & 18
	TR20-17	20 & 24

Metric Thread Chaser Sets

	Stock No.	Threads/inch & Pitch
Metric Chaser	TR20-25	4.5 mm & 5 mm
	TR20-26	3.5 mm & 4 mm
	TR20-27	2.5 mm & 3 mm
	TR20-28	1.75 mm & 2 mm
	TR20-29	1.25 mm & 1.5 mm
	TR20-30	.75 mm & 1 mm

TR20M Metric External Thread Chaser Set
- Same rethreading tool as the TR20C US set, except it includes six metric chasers (seven-piece)

TR25M Metric Internal Thread Chaser Set
- Includes a knurled handle thread chasing tool plus six metric chasers (seven-piece)

Thread Chaser Set Components

TR20C US External Thread Chaser Set
- Includes small rethreading tool with 1/2"–5 3/4" diameter capacity for bolt threads and 1/4"–4" capacity for pipe threads plus nine thread chasers

TR21A US External Thread Chaser Set
- Includes large rethreading tool with 5"–14" diameter pipe thread capacity plus nine thread chasers

TR25B US Internal Thread Chaser Set
- Includes knurled handle internal thread chasing tool plus nine chasers

SPECIAL PURPOSE

Spindle Rethreading Set

Stock No.	Rethreading Die Size	Set Contains: RD8
RD7-1	M24 x 1.5	•
RD7-2	M24 x 2	•
RD7-3	M22 x 1	•
RD7-4	M22 x 1.5	•
RD7-5	M20 x 1.5	•
RD7-6	3/4"-20	•
RD7-7	13/16"-20	•
RD7-9	M20 x 1.25	•
RD7-8	Storage Case	•

RD8

RD8 Spindle Rethreading Set
- For most imported or US front wheel drive vehicles

Light Truck Spindle Rethreading Set

Stock No.	Rethreading Die Size	Set Contains: RD8LT
RD7-23	2"-16	•
RD7-24	M38 x 1.5	•
RD7-25	1 5/8"-16	•
RD7-26	1 13/16"-16	•
RD7-27	Left Hand, 2"-16	•
RD7-28	2 1/8"-16	•
RD7-29	2 1/4"-16	•
RD8LT-1	2 5/8" Driver	•
RD8LT-2	Storage Case	•

RD8LT

RD8LT Light Truck Spindle Retheading Set
- For use on 4WD front and rear axle housings and medium to heavy duty 2WD trucks (rear axle)
- Restore axle housing and bearing/hub retention threads

⚠WARNING

- Rethreading tools are for renewing existing threads, do not use for cutting new threads on hardened steel
- Read safety precautions on pages W1 to W4

THREAD RESTORING: SPECIAL PURPOSE

RD20

DTRMAS105

DTRCFM114

Master Spindle Rethreading Set

Stock No.	Rethreading Die Size	Set Contains: RD20
RD7-1	M24 x 1.5	•
RD7-2	M24 x 2	•
RD7-3	M22 x 1	•
RD7-4	M22 x 1.5	•
RD7-5	M20 x 1.5	•
RD7-6	3/4"-20	•
RD7-7	13/16"-20	•
RD7-9	M20 x 1.25	•
RD7-10	3/4"-16 NF	•
RD7-11	7/8"-14 NF	•
RD7-12	1"-14 NF	•
RD7-13	11/16"-24 NF	•
RD7-14	M25-1.5	•
RD7-15	M27-2	•
RD7-16	27/32"-20 NF	•
RD7-17	M16-1	•
RD7-18	M16-1.5	•
RD7-19	M18-1.5	•
RD7-20	M19-1.5	•
RD7-21	M20-1	•
RD7-22	Storage Case	•

RD20 Master Spindle Rethreading Set

- Repair and renew damaged threads on stub axles and spindles for most vehicles
- Dies are manufactured from high tempered steel for strength and durability
- Each die size is embossed in the case directly below each die for easy identification and selection
- Application chart included

T14125

Metric Spark Plug Hole Taps

Stock No.	Size
T10100	M10 x 1.00
T12125	M12 x 1.25
T14125	M14 x 1.25
T18150	M18 x 1.50
T2818	7/8"-18 NF

DTRC58

DTRF58

Deep Well Thread Chasers

- Designed to clean and repair threads that are rusted, painted or damaged
- Unique pass through design allows you to thread even the longest bolt or wheel stud
- Back end of chaser is left open so that it can be threaded backwards on a stud to use the interior of the thread chaser as a guide to align the first couple threads
- Flip chaser over and clean threads the remaining distance on the fastener or stud
- Use a socket or wrench on the external hex drive end to operate chaser

Stock No.	Type	Thread Size	Set Contains: DTRMAS105	DTRCF110	DTRCFM114
DTRC38	National Coarse	3/8"-16 NC		•	•
DTRC716	National Coarse	7/16"-14 NC		•	•
DTRC12	National Coarse	1/2"-13 NC		•	•
DTRC916	National Coarse	9/16"-12 NC		•	•
DTRC58	National Coarse	5/8"-11 NC		•	•
DTRF38	National Fine	3/8"-24 NF		•	•
DTRF716	National Fine	7/16"-20 NF		•	•
DTRF12	National Fine	1/2"-20 NF	•	•	•
DTRF916	National Fine	9/16"-18 NF		•	•
DTRF58	National Fine	5/8"-18 NF		•	•
DTRM12.125	Metric	M12 x 1.25	•		•
DTRM12.150	Metric	M12 x 1.50	•		•
DTRM14	Metric	M14 x 1.50	•		•
DTRM16	Metric	M16 x 1.50	•		•

TDM101

Thread Gauge

TDM101 Metric Bolt and Thread Gauge

- Bolt diameter range of 2.3 mm–24 mm (with inch/decimal equivalents)
- Thread gauge sizes: .35 mm–3 mm

TDTDM117A Deluxe Combination Set
Includes all components of the TDTDM500A US/Metric set plus 41pc high-speed steel drill bit set in fractional, metric, wire gauge and letter sizes and five spiral screw extractors. Each drill bit matches to corresponding tap size for correct fit. Set offers a complete assortment of high carbon steel taps and dies in fractional and metric sizes. Tap/drill charts and tool diagrams included. Set packaged in a storage case.

TDTDM117A

TD9902B

TDP6

Set Contains:					TD9902B	TD2425	TDP6	TDTDM500A
	Thread Size	Tap Stock No.	Die Stock No.	Die Type	US Set	US Set	US Set	US/Metric Set
National Fine Threads (Adjustable Dies)	1/4"-28 NF	T105	D015	1" Double Hex Adjustable		●		●
	5/16"-24 NF	T106	D016	1" Single Hex Non-Adjustable		●		●
	3/8"-24 NF	T107	D017	1" Double Hex Adjustable		●		●
	7/16"-20 NF	T108	D018	1" Double Hex Adjustable		●		●
	1/2"-20 NF	T109	D019	1" Double Hex Adjustable		●		●
	1/2"-20 NF	–	DR019	1 1/2" Round Adjustable	●			
	9/16"-18 NF	T125	DR035	1 1/2" Round Adjustable	●			
	5/8"-18 NF	T126	DR036	1 1/2" Round Adjustable	●			
	3/4"-16 NF	T127	DR037	1 1/2" Round Adjustable	●			
	7/8"-14 NF	T128	DR042	2" Round Adjustable	●			
	1"-14 NF	T129	DR043	2" Round Adjustable	●			
National Fine Threads (Non-Adjustable Dies)	1/4"-28 NF	T105	GA541-1428	1" Single Hex Non-Adjustable				
	5/16"-24 NF	T106	GA541-51624	1" Single Hex Non-Adjustable				
	3/8"-24 NF	T107	GA541-3824	1" Single Hex Non-Adjustable				
	7/16"-20 NF	T108	GA541-71620	1" Single Hex Non-Adjustable				
	1/2"-20 NF	T109	GA541-1220	1" Single Hex Non-Adjustable				
National Coarse Threads (Adjustable Dies)	1/4"-20 NC	T100	D010	1" Double Hex Adjustable		●		●
	5/16"-18 NC	T101	D011	1" Double Hex Adjustable		●		●
	3/8"-16 NC	T102	D012	1" Double Hex Adjustable		●		●
	7/16"-14 NC	T103	D013	1" Double Hex Adjustable		●		●
	1/2"-13 NC	T104	D014	1" Double Hex Adjustable		●		●
	1/2"-1 NC	–	DR014	1 1/2" Round Adjustable				
	9/16"-12 NC	T120	DR030	1 1/2" Round Adjustable	●			
	5/8"-11 NC	T121	DR031	1 1/2" Round Adjustable	●			
	3/4"-10 NC	T122	DR032	1 1/2" Round Adjustable	●			
	7/8"-9 NC	T123	DR040	2" Round Adjustable	●			
	1"-8 NC	T124	DR041	2" Round Adjustable	●			
National Coarse Threads (Non-Adjustable Dies)	1/4"-20 NC	T100	GA541-1420	1" Single Hex Non-Adjustable				
	5/16"-18 NC	T101	GA541-51618	1" Single Hex Non-Adjustable				
	3/8"-16 NC	T102	GA541-3816	1" Single Hex Non-Adjustable				
	7/16"-14 NC	T103	GA541-71614	1" Single Hex Non-Adjustable				
	1/2"-13 NC	T104	GA541-1213	1" Single Hex Non-Adjustable				
Machine Screw Threads (Adjustable Dies)	4-40	T111A	D021A	5/8" Double Hex Adjustable		●		●
	6-32	T112	D022	5/8" Double Hex Adjustable		●		●
	8-32	T113	D023	5/8" Double Hex Adjustable		●		●
	10-24	T114	D024	5/8" Double Hex Adjustable		●		●
	10-32	T115	D025	5/8" Double Hex Adjustable		●		●
	12-24	T116	D026	5/8" Double Hex Adjustable		●		●
Machine Screw Threads (Non-Adjustable Dies)	4-40	T111A	GA541-440	5/8" Single Hex Non-Adjustable				
	6-32	T112	GA541-632	5/8" Single Hex Non-Adjustable				
	8-32	T113	GA541-832	5/8" Single Hex Non-Adjustable				
	10-24	T114	GA541-1024	5/8" Single Hex Non-Adjustable				
	10-32	T115	GA541-1032	5/8" Single Hex Non-Adjustable				
	12-24	T116	GA541-1224	5/8" Single Hex Non-Adjustable				
Pipe Threads (Adjustable Dies)	1/8"-27 NPT	T110	–	—		●	●	●
	1/8"-27 NPT	–	D020	1" Double Hex Non-Adjustable		●		●
	1/4"-18 NPT	T130	–	—	●		●	
	1/4"-18 NPT	–	DR033	1 1/2" Round Adjustable	●			
	3/8"-18 NPT	T131	–	—			●	
	1/2"-14 NPT	T132	–	—			●	
	3/4"-14 NPT	T133	–	—			●	
	1"-11 1/2" NPT	T134	–	—			●	
Pipe Threads (Non-Adjustable Dies)	1/8"-27 NPT	T110	GA541-1827	1" Double Hex Non-Adjustable				

⚠WARNING

- Rethreading tools are for renewing existing threads, do not use for cutting new threads on hardened steel
- Read safety precautions on pages W1 to W4

THREADING: TAP AND DIE SETS

TD2425

TDTDM500A

TDM99117B

TDM117A

	Thread Size	Tap Stock No.	Die Stock No.	Die Type	Set Contains: TD9902B	TD2425	TDTDM500A	TDM99117	TDM99117B	TDM117A
					US Set	US Set	US/Metric Set	Metric Set	Metric Set	US/Metric Set
Metric Threads	M3-.50	T305M	D305M	5/8" Double Hex Adjustable			●		●	●
	M4-.70	T407M	D407MA	5/8" Double Hex Adjustable			●		●	●
	M4-.75	T4075M	D4075M	5/8" Double Hex Adjustable			●		●	●
	M5-.8	T508M	D508MA	5/8" Double Hex Adjustable			●		●	●
	M5-.9	T509M	D509M	5/8" Double Hex Adjustable			●		●	●
	M6-1	T610M	D610MA	5/8" Double Hex Adjustable			●		●	●
	M7-1	T710M	D710M	1" Double Hex Adjustable			●		●	●
	M8-1.00	T810M	D810M	1" Double Hex Adjustable			●		●	●
	M8-1.25	T812M	D812M	1" Double Hex Adjustable			●		●	●
	M9-1	T910M	D910M	1" Double Hex Adjustable			●		●	●
	M9-1.25	T912M	D912M	1" Double Hex Adjustable			●		●	●
	M10-1.25	T1012M	D1012M	1" Double Hex Adjustable			●		●	●
	M10-1.5	T1015M	D1015M	1" Double Hex Adjustable			●		●	●
	M11-1.5	T1115M	D1115M	1" Double Hex Adjustable			●		●	●
	M12-1.5	T1215M	D1215M	1" Double Hex Adjustable			●		●	●
	M12-1.75	T1217M	D1217M	1" Double Hex Adjustable			●		●	●
	M14-1.25	T1412M	DR1412M	1 1/2" Round Adjustable			●	●		
	M14-1.5	T1415M	DR1415M	1 1/2" Round Adjustable			●	●		
	M14-2	T1420M	DR1420M	1 1/2" Round Adjustable			●	●		
	M16-1.0	T1610M	DR1615M	1 1/2" Round Adjustable			●	●		
	M16-1.5	T1615M	DR1620M	1 1/2" Round Adjustable			●	●		
	M16-2	T1620M	DR1815M	1 1/2" Round Adjustable			●	●		
	M18-1.5	T1815M	DR1825M	1 1/2" Round Adjustable			●	●		
	M18-2.5	T1825M	DR2025M	2" Round Adjustable			●	●		
	M20-2.5	T2025M	DR2215M	2" Round Adjustable			●	●		
	M22-1.5	T2215M	DR2420M	2" Round Adjustable			●	●		
	M24-2	T2420M	DR2430M	2" Round Adjustable			●	●		
	M24-3	T2430M	D020M	1" Double Hex Non-Adjustable			●		●	●
Accessories	1/8"-28 BSP	T110M	–	For 5/8" single hex dies						
	TD3A Die Stock	–	–	For 5/8" double hex dies		●	●		●	●
	GA26-2 Die Stock	–	–	Adjustable for 1" single hex dies						
	TD10A Die Stock	–	–	Self Centering for 1" double hex dies		●	●		●	●
	TD35 Die Stock	–	–	Self Centering for 1 1/2" diameter round dies	●		●	●		
	TD40 Die Stock	–	–	Self Centering for 2" diameter round dies	●		●	●		
	TD4 Tap Wrench	–	–	4 jaw, for 0–1/4" taps		●	●		●	●
	TD6 Tap Wrench	–	–	2 jaw, for 1/16–1/4" taps						
	TD7 Tap Wrench	–	–	2 jaw, for 1/4–1/2" taps						
	TD50 Tap Wrench	–	–	4 jaw, for 1/4–1/2" (M7 x 1.00 to M12 x 1.75) taps		●	●		●	●
	TD88A Tap Wrench	–	–	Clamp type, for 0–1/2" (M3 x 0.50 to M12 x 1.75) taps		●	●		●	●
	TD98A Tap Wrench	–	–	Clamp type, for 0–1" (M7 x 10 to M24 x 3.0) taps	●		●	●		
	TD1040 Thread Pitch Gauge	–	–	US		●				●
	TDM100 Thread Pitch Gauge	–	–	Metric			●		●	●
	TDS1 Screwdriver	–	–	For adjusting dies		●	●		●	●

TMA34

Metric Tap Set

Metric Tap Set Includes:

Stock No.	Thread Size	Stock No.	Thread Size	Stock No.	Thread Size
T305M	M3 x .50	**T910M**	M9 x 1.00	**T1420M**	M14 x 2.00
T306M	M3 x .60	**T912M**	M9 x 1.25	**T1610M**	M16 x 1.00
T407M	M4 x .70	**T1010M**	M10 x 1.00	**T1615M**	M16 x 1.50
T4075M	M4 x .75	**T1012M**	M10 x 1.25	**T1620M**	M16 x 2.00
T508M	M5 x .80	**T1015M**	M10 x 1.50	**T1815M**	M18 x 1.50
T509M	M5 x .90	**T1115M**	M11 x 1.50	**T18150**	M18 x 1.50
T610M	M6 x 1.00	**T1212M**	M12 x 1.25	**T1825M**	M18 x 2.50
T6310M	M6.33 x 1	**T1215M**	M12 x 1.50	**TDM100**	Metric Thread, Pitch Gauge
T710M	M7 x 1.00	**T1217M**	M12 x 1.75	**ATSS**	Adj. Tap Socket, 3 mm–6 mm
T810M	M8 x 1.00	**T1412M**	M14 x 1.25	**ATSL**	Adj. Tap Socket, 6 mm–12 mm
T812M	M8 x 1.25	**T14125**	M14 x 1.25		
T9075M	M9 x .75	**T1415M**	M14 x 1.50		

TMA34 Metric Tap Set
Precision ground flutes ensure accurate threading. High carbon steel ensures less breakage. Tap adaptors turn any 3/8" socket drive into a tap driver.

GAM541

GAM541 Metric Set (Blue-Point®)
40pc set features 1" single hex nonadjustable dies from 3 mm–12 mm, a 1/8"-28 BSP die plus taps in the same sizes. Also includes a die stock, two T-handle tap wrenches, a thread pitch gauge, a drill/tap chart, a midget screwdriver, and storage case.

GA541

GA541 U.S. Set *(Blue-Point)*
41pc set features taps and dies from #4–1/2" in both NF and NC threads, a pipe thread tap and die, plus two die stocks and three tap wrenches, a screw pitch gauge and a screwdriver in a storage case.

WARNING • Read safety precautions on pages W1 to W4

THREADING: SELF-ALIGNING TAPS AND DIES

TSA105

Self Aligning Taps

- Self aligning taps feature Chip Breaking Technology (CBT) allowing the cutting edge to cut, break and chip cleaner. Up to 30% easier to break chips
- Self aligning taps come with an alignment chamfer that allows the tap to start straight every time, ensuring straight threads and less chance of cross threading
- Increased flute taper increases tap durability up to 20%
- Plug chamfer style for general purpose threading
- High carbon steel is ideal for hand tapping applications

Self Aligning Taps, US

Stock No.	Thread Size
T110	1/8"-27 NPT
TSA111	4-40 Machine Screw
TSA112	6-32 Machine Screw
TSA113	8-32 Machine Screw
TSA114	10-24 Machine Screw
TSA115	10-32 Machine Screw
TSA116	12-24 Machine Screw
TSA100	1/4"-20 NC
TSA105	1/4"-28 NF
TSA101	5/16"-18 NC
TSA106	5/16"-24 NF
TSA102	3/8"-16 NC
TSA107	3/8"-24 NF
TSA103	7/16"-14 NC
TSA108	7/16"-20 NF
TSA104	1/2"-13 NC
TSA109	1/2"-20

Self Aligning Taps, Metric

Stock No.	Thread Size
T110M	1/8"-28 BSP
TSA305M	M3-.50
TSA4075M	M4-.75
TSA407M	M4-.70
TSA508M	M5-.80
TSA509M	M5-.90
TSA610M	M6-1.00
TSA710M	M7-1.00
TSA810M	M8-1.00
TSA812M	M8-1.25
TSA910M	M9-1.00
TSA912M	M9-1.25
TSA1012M	M10-1.25
TSA1015M	M10-1.50
TSA1115M	M11-1.50
TSA1212M	M12-1.25
TSA1217M	M12-1.75

DSA019

Self Aligning Dies

- Self aligning dies feature CBT ensuring clean cuts in both directions
- Alignment plate design starts straight every time to reduce the chance of cross threading
- Roller threads provide greater thread quality, accuracy and cutting ease
- Made from high carbon steel
- Use dies with the TDALDS1 Die Stock

Self Aligning Dies, US

Stock No.	Die Type	Thread Size
D020	1" Double Hex Non-Adjustable	1/8"-27 NPT
DSA010	Double Hex	1/4"-20 NC
DSA011	Double Hex	5/16"-18 NC
DSA012	Double Hex	3/8"-16 NC
DSA013	Double Hex	7/16"-14 NC
DSA014	Double Hex	1/2"-13 NC
DSA015	Double Hex	1/4"-28 NF
DSA016	Double Hex	5/16"-24 NF
DSA017	Double Hex	3/8"-24 NF
DSA018	Double Hex	7/16"-20 NF
DSA019	Double Hex	1/2"-20
DSA021	Double Hex	4-40 Machine Screw
DSA022	Double Hex	6-32 Machine Screw
DSA023	Double Hex	8-32 Machine Screw
DSA024	Double Hex	10-24 Machine Screw
DSA025	Double Hex	10-32 Machine Screw
DSA026	Double Hex	12-24 Machine Screw

Self Aligning Dies, Metric

Stock No.	Die Type	Thread Size
D020M	1" Double Hex Non-Adjustable	1/8"-28 BSP
DSA305M	Double Hex	M3 x .50
DSA4075M	Double Hex	M4 x .75
DSA407M	Double Hex	M4 x .70
DSA508M	Double Hex	M5 x .80
DSA509M	Double Hex	M5 x .90
DSA610M	Double Hex	M6 x 1.00
DSA710M	Double Hex	M7 x 1.00
DSA810M	Double Hex	M8 x 1.00
DSA812M	Double Hex	M8 x 1.25
DSA910M	Double Hex	M9 x 1.00
DSA912M	Double Hex	M9 x 1.25
DSA1012M	Double Hex	M10 x 1.25
DSA1015M	Double Hex	M10 x 1.50
DSA1115M	Double Hex	M11 x 1.50
DSA1212M	Double Hex	M12 x 1.25
DSA1217M	Double Hex	M12 x 1.75

Tap and Die Drive Tool System

TDALDS1 Die Stock
- Features a twist die lock which means no more set screws are needed
- Simply twist to insert or remove the die
- Ergonomic handles for comfort and control when threading
- Fits 1" double hex dies

TDALTS1 Adjustable Tap Socket
- For 0"–1/4" (M3 x .50–M6 x 1.00) taps
- Versatile base can be driven with die stock, 3/8" ratchet or T-bar handle

TDALTS2 Adjustable Tap Socket
- For 1/4"–1/2" (M7 x 1.00–M12 x 1.75) taps
- Versatile base can be driven with die stock, 3/8" ratchet or T-bar handle

TDALDSS Die Spacer
- 1/8" spacer accommodates standard 1" hex dies
- Drives tools compatible with all 1" hex dies and ANSI® spec taps

TDALTSB T-Bar Handle
- For TDALTS1 and TDALTS2 Adjustable Tap Sockets

TD1040 Thread Pitch Gauge
- Measures US or sharp "V" threads
- Includes 18 plated blades for the following thread sizes: 8, 9, 10, 11, 11 1/2, 12, 13, 14, 16, 18, 20, 24, 27, 28, 32, 36, 40 and 44 threads per inch

TDM100 Metric Thread Pitch Gauge

TDRSET Tap and Die Drive Tool Set

Includes: TDALDS1 Die Stock, TDALTS1 and TDALTS2 Adjustable Tap Sockets, TDALDSS Die Spacer, TDALTSB T-Bar Handle, TD1040 US Thread Pitch Gauge and TDM100 Metric Thread Pitch Gauge seven-piece in storage box.

TDRSET

TAP SOCKETS AND DIE SETS

Tap Sockets (1/4"–3/8" Drive)

Stock No.	Square Drive, inches	Fits SAE Size Taps	Fits Metric Size Taps	Shank Dia., inches	Square Size, inches	Set Contains: TDL8
TDL8-1	1/4	#1, #2, #3, #4, #5, #6	M1.6, M1.8, M2, M2.2, M2.5, M3, M3.15, M3.5	.141	.110	•
TDL8-2	1/4	#8	M4	.168	.131	•
TDL8-3	1/4	#10	M4.5, M5	.194	.152	•
TDL8-4	1/4	1/4"	M6, M6.3	.255	.191	•
TDL8-5	3/8	5/16", 7/16"	M7, M8	.323	.242	•
TDL8-6	3/8	3/8"	M10	.381	.286	•
TDL8-7	3/8	1/2"	M12, M12.5	.367	.275	•
TDL8-8	3/8	1/8" NPT	—	.437	.328	•

TDL8

TDL8 Tap Socket Set
- For use with ratchets and handles
- Rubber O-rings hold taps securely in place
- Black industrial finish

Tap Sockets (1/2" Drive)

Stock No.	Square Drive, inches	Fits SAE Size Taps	Fits Metric Size Taps	Shank Dia., inches	Square Size, inches	Set Contains: TDL3
TDL31	1/2	5/8	16 mm	.480	.360	•
TDL32	1/2	11/16	18 mm	.542	.406	•
TDL33	1/2	3/4	—	.590	.442	•

TDL3

TDL3 Tap Socket Set
- Use in restricted areas where a T-Handle will not easily fit
- Manufactured to M.C.T.I. standards
- Black industrial finish

Bottoming Taps

- Allows blind holes to be tapped within one thread of bottom of hole

Stock No.	Thread Size	Set Contains: TB300C	TB300F
TB3/8C	3/8"-16 NC	•	
TB3/8F	3/8"-24 NF		•
TB5/16C	5/16"-18 NC	•	
TB7/16C	7/16"-14 NC	•	
TB5/16F	5/16"-24 NF		•
TB7/16F	7/16"-20 NF		•

TB300C

⚠WARNING

• Read safety precautions on pages W1 to W4

THREADING: TAP SOCKETS AND DIE SETS

YA577A

TDW1000

Ratcheting Tap Wrenches (Blue-Point®)

YA577A T-handle Tap Wrench
- For taps up to 1/4"
- Ratchet clockwise or counterclockwise
- 3 3/8" long body, 3 15/16" handle

YA578A T-handle Tap Wrench
- For 1/4"–1/2" taps
- Ratchet clockwise or counterclockwise
- 4 3/8" long body, 4 3/4" handle

TDW1000 Ratcheting Tap and Die Wrench
- Cut and renew threads in confined areas
- Bi-directional ratcheting action
- Holds dies with 1" (25 mm) diameter
- Includes adaptors for hex and double hex
- Also includes adaptors for most popular tap sizes: .250" (6.35 mm), .290" (7.36 mm), .335" (8.5 mm) and .535" (13.58 mm)

ATSS

ATSL

Adjustable Tap Sockets

- Designed for use with taps, reamers, screw extractors and other tools with a square shank
- Small profile for easier access to tight work spaces
- Adaptor turns any 3/8" square drive ratchet or handle into a tap driver

ATSS Adjustable Tap Socket
- Fits common taps from #6–1/4" (3 mm–6 mm)

ATSL Adjustable Tap Socket
- Fits common taps from 1/4"–1/2" (6 mm–12 mm)

ATSSET Adjustable Tap Socket Set
- ATSS and ATSL (two-piece)



TD1040

Thread Pitch Gauge

TD1040 Thread Pitch Gauge
- Measures US or sharp "V" threads
- Includes 18 plated blades for the following thread sizes: 8, 9, 10, 11, 11 1/2, 12, 13, 14, 16, 18, 20, 24, 27, 28, 32, 36, 40 and 44 threads per inch

PLUG TAPS AND DIES

Plug Taps

	Stock No.	Thread Size	Thread Pitch
Tap	T111	4-36	Right Hand
	T6310M	M6.33 x 1	Right Hand
	T1010M	M10 x 1.00	Right Hand
	T1112M	M11 x 1.25	Right Hand
	T1212M	M12 x 1.25	Right Hand
	T1412M	M14 x 1.25	Right Hand
	T1415M	M14 x 1.50	Right Hand
	T1420M	M14 x 2.00	Right Hand

Plug Dies

	Stock No.	Thread Size	Thread Pitch	Die Type
Die	D021	4-36	Right Hand	5/8" Dbl. Hex
	D040	1/4"-18	Right Hand	1" Dbl. Hex
	D147M	M4 x .70	Right Hand	1" Dbl. Hex
	D158M	M5 x .80	Right Hand	1" Dbl. Hex
	D161M	M6 x 1.00	Right Hand	1" Dbl. Hex
	D1010M	M10 x 1.00	Right Hand	1" Dbl. Hex
	D1112M	M11 x 1.25	Right Hand	1" Dbl. Hex
	D1212M	M12 x 1.25	Right Hand	1" Dbl. Hex
	D1615M	M16 x 1.50	Right Hand	1 1/4" Hex
	D1615ML	M16 x 1.50	Left Hand	1 1/4" Hex
	D1620M	M16 x 2.00	Right Hand	1 1/4" Hex
	D1810M	M18 x 1.00	Right Hand	1 7/16" Hex
	D1815M	M18 x 1.50	Right Hand	1 7/16" Hex
	D1815ML	M18 x 1.50	Left Hand	1 7/16" Hex
	D1825M	M18 x 2.50	Right Hand	1 7/16" Hex
	DR2015M	M20 x 1.50	Right Hand	2" Round
	D2025M	M20 x 2.50	Right Hand	1 7/16" Hex
	D2215M	M22 x 1.50	Right Hand	1 5/8" Hex
	D2215ML	M22 x 1.50	Left Hand	1 5/8" Hex
	D2415M	M24 x 1.50	Right Hand	1 13/16" Hex
	D3015M	M30 x 1.50	Right Hand	2" Hex

EXDMS48 Master Extractor Set

EXDMS48

- Quickly and easily extracts the toughest screws from 3/32"–15/16" screw sizes (including metric sizes)
- Includes 16 left hand mechanic's length cobalt drill bits, 13 multispline screw extractors (1/8"–1/2"), six spiral flute screw extractors plus 13 hex head fastener extractors (1/4"–3/4")
- Hex head extractors feature left hand spiral flutes for maximum gripping power
- External hex and square drive wrenching options for use with wrenches, impact wrenches and ratchet/socket combinations
- 48pc in storage case

EXD35 Screw Extractor Set

EXD35

- Quickly and easily extracts tough screws from 3/32"–15/16" (including metric sizes)
- Includes 16 left hand mechanic's length cobalt drill bits, 13 multispline screw extractors and six spiral flute screw extractors in EXD35-1 storage case

EXD10 Right Hand Extractor Set

EXD10

- Includes five right hand, mechanic's length cobalt drill bits and five spiral flute screw extractors in metal index

EXDL10 Left Hand Extractor Set

- Includes five left hand, mechanic's length cobalt drill bits and five spiral flute screw extractors in metal index

E1025 Extractor Set (Blue-Point®)

EXDL10

- Extract broken screws from 1/4"–1" diameter and standard pipe sizes 1/8"–1"
- Storage case

E1020 Extractor Set *(Blue-Point)*

- Extracts broken screws from 1/4"–1/2" diameter
- Storage case

E1025

E1020

Set Contains:	Stock No.	EXDMS48	EXD35	EXD10	EXDL10	E1025	E1020
Right Hand Drill Bits	CSE405B					●	
	DBCFS5/64			●			
	DBCFS7/64			●			
	DBCFS5/32			●			
	DBCFS1/4			●			
	DBCFS19/64			●			
	DBF1/8C					●	●
	DBF3/16C					●	●
	DBF1/4C					●	●
	DBF5/16C					●	●
	DBF11/32C					●	●
	DBF7/16C					●	
	DBF1/2C					●	
Left Hand Drill Bits	DBCL5/64	●	●		●		
	DBCL7/64	●	●		●		
	DBCL5/32	●	●		●		
	DBCL3/16	●	●				
	DBCL1/4	●	●		●		
	DBCL9/32	●	●				
	DBCL19/64	●	●		●		
	DBCL5/16	●	●				
	DBCL11/32	●	●				
	DBCL3/8	●	●				
	DBCL13/32	●	●				
	DBCL7/16	●	●				
	DBCL15/32	●	●				
	DBCL1/2	●	●				
Solid Type Drill Guides	E921					●	
	E1021					●	●
	E1121					●	●
	E1221					●	●
	E1321					●	●
	E1421					●	●
	E1521					●	●
	E1621					●	●
	E1721					●	●
	E1821					●	●
Sleeve Type Drill Guides	E34					●	
	E33A					●	
Sleeve Bushings (in pairs)	E3033					●	

Set Contains:	Stock No.	EXDMS48	EXD35	EXD10	EXDL10	E1025	E1020
Straight Screw Extractors	E1					●	●
	E2					●	●
	E3					●	●
	E4					●	●
	E5					●	●
	E6					●	
	E7					●	
	E8					●	
Pipe Plug Extractors	E80					●	
	E81					●	
	E82					●	
	E83					●	
	E84					●	
	E85					●	
Spiral Flute Screw Extractors	EX1	●	●	●	●		
	EX2	●	●	●	●		
	EX3	●	●	●	●		
	EX4	●	●	●	●		
	EX5	●	●				
	EX6	●	●	●	●		
Multispline Screw Extractors	REX104A	●	●				
	REX105A	●	●				
	REX106A	●	●				
	REX107A	●	●				
	REX108A	●	●				
	REX109A	●	●				
	REX110A	●	●				
	REX111A	●	●				
	REX112A	●	●				
	REX113A	●	●				
	REX114A	●	●				
	REX115A	●	●				
	REX116A	●	●				
Hex Head Fastener Extractors	BEX081	●					
	BEX101	●					
	BEX121	●					
	BEXM101	●					
	BEX141	●					
	BEXM121	●					
	BEX161	●					
	BEXM131	●					
	BEX181	●					
	BEX201	●					
	BEXM171	●					
	BEX221	●					
	BEX241	●					

EXTRACTORS: EXTRACTOR TOOLS

REX25B

REX10B

REX15B

Multispline Extractors Sets

- Shoulder prevents extractor from entering too deeply and expanding screw

REX25B Multispline Extractor Set
REX104A–REX128A (25pc) in REX25BMT storage case.

REX10B Multispline Extractor Set
REX104A–REX113A (ten-piece) in REX10BMT storage case.

REX15B Multispline Extractor Set
REX104A–REX118A (15pc) in REX15BMT storage case.

Multispline Extractors

Stock No.	Drill Size, inches	Bolt Size, inches	Pipe Size, inches	Hex Size, inches	Mark
REX104A	1/8	1/4	—	1/2	A
REX105A	5/32	5/16	—	1/2	B
REX106A	3/16	3/8	—	1/2	C
REX107A	7/32	7/16	—	1/2	D
REX108A	1/4	1/2	1/8	1/2	E
REX109A	9/32	9/16	—	1/2	F
REX110A	5/16	5/8	—	1/2	G
REX111A	11/32	11/16	1/4	1/2	H
REX112A	3/8	3/4	—	1/2	I
REX113A	13/32	13/16	—	1/2	J
REX114A	7/16	7/8	—	5/8	K
REX115A	15/32	15/16	3/8	5/8	L
REX116A	1/2	1	—	5/8	M
REX117A	17/32	1 1/16	—	5/8	N
REX118A	9/16	1 1/8	—	3/4	O
REX119A	19/32	1 3/16	—	3/4	P
REX120A	5/8	1 1/4	1/2	3/4	Q
REX121A	21/32	1 5/16	—	7/8	R
REX122A	11/16	1 3/8	—	7/8	S
REX123A	23/32	1 7/16	—	7/8	T
REX124A	3/4	1 1/2	—	7/8	U
REX125A	25/32	1 9/16	3/4	1	V
REX126A	13/16	1 5/8	—	1	W
REX127A	27/32	1 11/16	—	1	X
REX128A	7/8	1 3/4	—	1	Y

Power Fastener Extractors (Blue-Point®)

- Extracts hex head, socket head, round head and other fasteners
- 1/4" universal hex shank is ideal for use with cordless, air or electric drills, impact wrenches, nut runners and hand tools
- Power groove for use with quick change adaptors
- Reverse spiral flutes hold on to the most elusive fastener heads
- High carbon steel ensures longer life and greater durability
- High carbon steel shank is larger than most fastener shanks and resists torsional shear

BET7

Stock No.	Size, inches (mm)	Set Contains: BET7
BET76	3/16 (5)	●
BET78	1/4 (6)	●
BET710	5/16 (8)	●
BET712	3/8 (10)	●
BETM710	(10)	●
BET714	7/16 (11)	●
BET716	1/2 (12)	●

BEX13A

BEX5B

Hex Head Fastener Extractors

- Use on most popular hex head fasteners from 1/4"–1" (8 mm–24 mm)
- Sockets feature left hand spiral flutes for maximum gripping power
- Manufactured from high carbon steel for maximum strength
- External hex and square drive wrenching options for use with wrenches, impact wrenches and ratchet/socket combinations

Stock No.	Square Drive, inches	Size, inches (mm)	External Hex, inches (mm)	Outside Dia., inches (mm)	Length, inches (mm)	Set Contains: BEX13A	Set Contains: BEX5B
BEX081	3/8	1/4 (6)	5/8 (15.9)	3/8 (9.5)	1 1/16 (27.0)	●	
BEX101	3/8	5/16 (8)	5/8 (15.9)	7/16 (11.1)	1 1/16 (27.0)	●	
BEX121	3/8	3/8 (10)	5/8 (15.9)	9/16 (14.3)	1 1/16 (27.0)	●	
BEXM101	3/8	n/a (10)	3/4 (19.1)	5/8 (15.5)	1 1/16 (27.0)	●	
BEX141	3/8	7/16 (11)	3/4 (19.1)	5/8 (15.9)	1 1/16 (27.0)	●	
BEXM121	3/8	n/a (12)	3/4 (19.1)	23/32 (17.5)	1 1/16 (27.0)	●	
BEX161	3/8	1/2 (12)	3/4 (19.1)	23/32 (17.9)	1 1/16 (27.0)	●	
BEXM131	3/8	n/a (13)	3/4 (19.1)	23/32 (18.5)	1 1/16 (27.0)	●	
BEX181	3/8	9/16 (14)	7/8 (22.2)	25/32 (19.4)	1 1/16 (27.0)	●	
BEX201	3/8	5/8 (16)	7/8 (22.2)	7/8 (21.8)	1 1/16 (27.0)	●	
BEXM171	3/8	n/a (17)	1 (25.4)	29/32 (23.0)	1 1/16 (27.0)	●	
BEX221	3/8	11/16 (n/a)	1 (25.4)	15/16 (24.2)	1 1/16 (27.0)	●	
BEX241	3/8	3/4 (19)	1 1/16 (27)	1 1/32 (26.2)	1 1/16 (27.0)	●	
BEXW241	1/2	3/4 (19)	1 1/4 (31.8)	1 1/8 (28.6)	1 3/4 (44.5)		●
BEXW261	1/2	13/16 (21)	1 3/8 (34.9)	1 3/16 (30.2)	1 3/4 (44.5)		●
BEXW281	1/2	7/8 (22)	1 7/16 (36.5)	1 1/4 (31.8)	1 3/4 (44.5)		●
BEXW301	1/2	15/16 (24)	1 7/16 (36.5)	1 5/16 (33.3)	1 3/4 (44.5)		●
BEXW321	1/2	1 (n/a)	1 7/16 (36.5)	1 3/8 (34.9)	1 3/4 (44.5)		●
BEX13AMT	Storage Case					●	
BEX5CASE	Storage Case						●

External Drive Hex Head Slim Twist Sockets

110STSY External Drive Twist Socket Set

- Quickly and easily remove damaged or rounded nuts and bolts, socket head cap screws in close quarters and nuts threaded on long studs
- Ideal for use for aircraft and exhaust systems applications
- Includes ten external hex drive slim twist sockets for the following hex head fasteners:
  Fractional: 3/8", 7/16", 5/8" and 3/4"
  Metric: 9 mm, 10 mm, 11 mm, 12 mm, 13 mm, 14 mm, 15 mm, 16 mm, 17 mm and 19 mm
  Sockets are stored on MSR1 magnetic socket holder

110STSY

Stock No.	Nut/Bolt Size, inches (mm)	Socket Number	External Hex, inches	Socket Thickness, inches (mm)	Finish
110STSY1	3/8 (9)	#1	5/8	0.38 (9.5)	Industrial Black
110STSY2	(10)	#2	5/8	0.38 (9.5)	Industrial Black
110STSY3	7/16 (11)	#3	11/16	0.38 (9.5)	Industrial Black
110STSY4	(12)	#4	3/4	0.38 (9.5)	Industrial Black
110STSY5	(13)	#5	3/4	0.50 (12.7)	Industrial Black
110STSY6	(14)	#6	13/16	0.50 (12.7)	Industrial Black
110STSY7	(15)	#7	7/8	0.50 (12.7)	Industrial Black
110STSY8	5/8 (16)	#8	15/16	0.62 (15.9)	Industrial Black
110STSY9	(17)	#9	1	0.62 (15.9)	Industrial Black
110STSY10	3/4 (19)	#10	1 1/16	0.62 (15.9)	Industrial Black

Deep Well Extractors

- External hex and 3/8" square drive wrenching options for use with wrenches, impact wrenches and ratchet/socket combinations
- Deep well design fits over exposed studs and reaches recessed fasteners
- Reverse spiral flutes bite into stubborn fasteners, both fractional and metric, with maximum gripping power
- Reduced profile head enables use in confined spaces

BEXD181

BEXD9

Stock No.	Size, inches	Length, inches	Set Contains: BEXD9
BEXD081	1/4	2 7/16	•
BEXD101	5/16	2 7/16	•
BEXD121	3/8	2 7/16	•
BEXD141	7/16	2 7/16	•
BEXD161	1/2	2 7/16	•
BEXD181	9/16	2 7/16	•
BEXD201	5/8	2 7/16	•
BEXD241	3/4	2 7/16	•
BEXDM131	13 mm	2 7/16	•

Right Hand Fractional Drill Bits

- Use right hand drill bits to make a hole in the broken screw before the extractor is inserted

Stock No.	Size, inches	Flute Length, inches	Overall Length, inches
CSE405B	5/8	3	6
DBF1/2C	1/2	2 1/4	4 3/4
DBF1/4C	1/4	2 1/2	4
DBF1/8C	1/8	1 3/8	3
DBF11/32C	11/32	2 3/4	4 1/2
DBF3/16C	3/16	2	3 1/2
DBF5/16C	5/16	2 5/8	4 1/2
DBF7/16C	7/16	1 7/8	4 1/4

Spiral Flute Screw Extractors

- Designed to remove broken studs, bolts, socket screws and fittings
- Aggressive left hand spiral design for extra gripping power

EX1

Stock No.	Use Drill Size, inches	Removes Bolts and Screws
EX1	5/64	3/32"–5/32", 2.5 mm–4 mm, #3–#6
EX2	7/64	5/32"–7/32", 4 mm–6 mm, #6–#12
EX3	5/32	7/32"–9/32", 6 mm–8 mm, #12
EX4	1/4	9/32"–3/8", 1/8" NPT, 1/8" BSP, 8 mm–10 mm
EX5	19/64	3/8"–5/8", 1/4" NPT, 1/4" BSP, 10 mm–16 mm
EX6	13/32	5/8"–7/8", 3/8" NPT, 3/8" BSP, 16 mm–22 mm

Solid-Type Drill Guides

- Used for centering drills at a depth not exceeding 1"

E921

Stock No.	Outside Dia., inches	For Drill Size, inches	Length, inches
E921	9/32	1/8	1 3/16
E1021	5/16	1/8	1 3/16
E1121	11/32	1/8	1 3/16
E1221	3/8	1/8	1 3/16
E1321	13/32	3/16	1 3/16
E1421	5/16	3/16	1 3/16
E1521	15/32	3/16	1 3/16
E1621	1/2	3/16	1 3/16
E1721	17/32	1/4	1 3/16
E1821	9/16	1/4	1 3/16

DBLS105A

Left Hand Fractional Drill Bits (High Speed Steel)

- Left hand drill bits tend to loosen screws for easier removal

	Stock No.	Size, inches	Flute Length, inches	Overall Length, inches	Set Contains: DBLS105A
Left-Hand	DBLS1/8A	1/8	1 3/8	3	•
	DBLS3/16A	3/16	2	3 1/2	•
	DBLS1/4A	1/4	2 1/2	4	•
	DBLS5/16A	5/16	2 5/8	4 1/2	•
	DBLS11/32A	11/32	2 3/4	4 1/2	•

DBCL105A

Left Hand Fractional Drill Bits (Cobalt)

Stock No.	Size, inches	Set Contains: DBCL105A
DBCL5/64A	5/64	•
DBCL7/64A	7/64	•
DBCL5/32A	5/32	•
DBCL3/16	3/16	
DBCL1/4A	1/4	•
DBCL9/32	9/32	
DBCL19/64A	19/64	•
DBCL5/16	5/16	
DBCL11/32	11/32	
DBCL3/8	3/8	
DBCL13/32	13/32	
DBCL7/16	7/16	
DBCL15/32	15/32	
DBCL1/2	1/2	

Tapered Bit Extractors

SR40K Tapered Bit Extractor Set

- Tapered ends have left hand threads to bite deep into drilled studs
- Square shafts for use with wrench
- Four-piece set includes SR4A (1/8"), SR10A (9/64"), SR14 (7/32") and SR20 (5/16") in C0407 kit bag

SR40K

Sleeve Type Drill Guides

- Use to center 1/4" diameter, 6" long drill bits
- Parts are interchangeable to adapt to different screw or stud holes and depths up to 3 3/4"

E34 Sleeve Type 5/8" O.D.
E33A Sleeve Type 3/4" diameter
E33B Sleeve Spacer (set of four) 5/8" diameter

Sleeve Bushings (in pairs)

Stock No.	Diameter, inches
E2133	21/32
E2933	29/32
E3033	15/16
E3133	31/32

E2133

WARNING • Read safety precautions on pages W1 to W4

EXTRACTORS: EXTRACTOR TOOLS

E1

E6

Straight Screw Extractors

	Stock No.	For Screw Dia. or Std. Pipe, inches	Drill Size, inches	Length, inches
Straight Screw, Hex Nut Type	E1	1/4	1/8	2 5/16
	E2	5/16	3/16	2 3/4
	E3	3/8	1/4	3 1/16
	E4	7/16	5/16	3 5/16
	E5	1/2	11/32	3 3/4
	E6	1/2	7/16	4 1/8
	E7	3/4	1/2	4 1/2
	E8	1	1/2	4 5/8

E80

Pipe Plug Extractors

Stock No.	For Screw Dia. or Std. Pipe, inches	Drill Size, inches	Length, inches
E80	1/8	17/64	2 1/4
E81	1/4	3/8	2 1/2
E82	3/8	1/2	2 3/4
E83	5/8	5/8	3
E84	3/4	13/16	3 1/4
E85	1	1 1/16	3 1/2

All in one Extractor Set

YA769 Extractor Set (Blue-Point®)

- Extract broken screws from 1/4"–1/2" diameter
- Drill/extract with one tool
- Left hand drill bit
- For use in 3/8" drive reversible drill

YA769

Stock No.	Extractor Size Fractional	Drilling Speed, RPM	Extracting Speed, RPM
YA769-1	1/4	700–800	350
YA769-2	5/16	650–750	470
YA769-3	3/8	600–700	350
YA769-4	1/2	475–575	350

YA2019 Screw Remover Set *(Blue-Point)*

- Use to remove damaged Phillips®, TORX®, Pozidriv®, slotted, Internal Hex, Tri-Wing®, Frearson and most tamper-resistant screws and fasteners
- Tool bites into the damaged fastener in the reverse direction allowing the user to easily remove damaged screws
- Use with variable speed reversing drill or 1/4" hex bit screwdriver

YA2019

Stock No.	Extractor Size Bolt Size	Set Contains: YA2019
YA2019-1	#6–#8	•
YA2019-2	#8–#10	•
YA2019-3	#10–#12	•

Cam and Wedge Type Stud Removers

A50A

A50A Stud Remover

- 7/16"–1/2" capacity
- V-shaped rack grips stud
- Grip releases when pressure is relieved
- Uses 1/2" drive handle

A50-4B Optional Rack

- For 5/16"–3/8" capacity

A36A

A36A Stud Remover

- 1/2"–3/4" capacity
- Knurled wheel grips stud
- Driving shank extends through both sides of housing for bearing surface on each side of wheel
- Uses 1/2" drive handle

A80A

A80A Stud Remover

- 1/4"–1/2" capacity
- Jaws grip when pressure is applied
- Built-in ratchet action
- Needs only 1 1/4" clearance
- Use with 1/2" drive handle or 1" wrench

LA55A

LA55A Stud Remover

- 9/16"–1" capacity
- Grip is released by turning tool in reverse direction
- Works on wedge principle
- Use with 3/4" drive handle
- Includes two wedge sizes: LA55A2 and LA55A3

LA54 Stud Remover

- 1/4"–5/8" capacity
- Smaller version of LA55A
- Includes two wedge sizes: LA54-2A and LA54-3A
- Requires 1/2" drive handle

YA789 Power Extractor Set *(Blue-Point)*

- Place extractor end of tool in drill chuck, set for reverse and hole can be drilled
- Next, insert drill side into chuck, exposing extractor end, and finish the job to remove broken screw
- Packaged in YA789-5 storage case

YA789

Stock No.	Extractor Size Bolt Size	Extractor Size Fractional	Extractor Size Metric	Set Contains: YA789
YA789-1	—	#5, #6	M3	•
YA789-2	—	#8	M4	•
YA789-3	#10, #12	—	M5	•
YA789-4	—	1/4"	M6	•

YA2020 Screw Extractor Set *(Blue-Point)*

- Easily extracts #6–#14 damaged screws from wood, metal or plastic. Remove hex, *TORX*, *Phillips*, slotted or square head screws
- Use with 1/4" quick disconnect or 1/4" hex hand or power tool
- Works with a variety of screw materials

YA2020

Stud Removers

- Tapered collets thread onto stud, even if only a few threads are exposed
- Tightening the housing bolt draws the collet into the housing and clamps collet onto stud
- Tools reduce chance of damage to stud threads
- Avoid bottoming or shouldering studs to avoid shearing or damaging stud or workpiece

CG500

CG500-17

CG500-2

Stud Removers Set Components

Stock No.	Collet Size	Housing Stock No.	CG5151	CG5152	CG5153	CG515B	CGM515B	CG500	CG505
CG500-17	#10-24	CG500-2	•						
CG500-18	#10-32	CG500-2	•						
CG500-2	Housing	CG500-2	•	•	•	•	•	•	
CG500-3	1/4"-20	CG500-2	•	•		•			
CG500-4	1/4"-28	CG500-2	•	•					
CG500-5	5/16"-18	CG500-2	•	•		•			
CG500-6	5/16"-24	CG500-2	•	•		•			
CG500-7	3/8"-16	CG500-2	•	•		•			
CG500-8	3/8"-24	CG500-2	•	•		•		•	
CG500-9	7/16"-14	CG500-2	•	•		•			
CG500-10	7/16"-20	CG500-2	•	•		•		•	
CG500-11	1/2"-13	CG500-2	•	•		•			
CG500-12	1/2"-20	CG500-2	•	•		•		•	
CG500-13	9/16"-12	CG500-2	•	•		•			
CG500-14	9/16"-18	CG500-2	•	•		•			
CG500-15	5/8"-11	CG500-2	•	•		•			
CG500-16	5/8"-18	CG500-2	•	•		•			
CG500H1	3/8" Hex	CG500-2	•						
CG500H2	7/16" Hex	CG500-2	•						
CG500H3	1/2" Hex	CG500-2	•						
CG500H4	9/16" Hex	CG500-2							
CG505-8	11/16"-16	CG505-1							
CG505-2	3/4"-10	CG505-1							•
CG505-5	3/4"-16	CG505-1							
CG505-3	7/8"-9	CG505-1							•
CG505-6	7/8"-14	CG505-1							
CG505-4	1"-8	CG505-1							•
CG505-7	1"-14	CG505-1							
CG505H1	5/8" Hex	CG505-1							
CG505H2	11/16" Hex	CG505-1							
CG505H3	3/4" Hex	CG505-1							
CG505H4	13/16" Hex	CG505-1							
CG505H5	7/8" Hex	CG505-1							
CG508-1	1 1/8"-7	CG508							

Stock No.	Collet Size	Housing Stock No.	CG5151	CG5152	CG5153	CG515B	CGM515B	CG500	CG505
CG508-9	1 1/8"-8	CG508							
CG508-2	1 1/8"-12	CG508							
CG508-3	1 1/4"-7	CG508							
CG508-10	1 1/4"-8	CG508							
CG508-4	1 1/4"-12	CG508							
CG508-5	1 3/8"-6	CG508							
CG508-11	1 3/8"-8	CG508							
CG508-6	1 3/8"-12	CG508							
CG508-7	1 1/2"-6	CG508							
CG508-12	1 1/2"-8	CG508							
CG508-8	1 1/2"-12	CG508							
CG500-30	M6-1.00	CG500-2	•		•		•		
CG500-33	M7-1.00	CG500-2	•		•		•		
CG500-36	M8-1.00	CG500-2	•		•		•		
CG500-37	M8-1.25	CG500-2	•		•		•		
CG500-39	M9-1.00	CG500-2	•		•		•		
CG500-40	M9-1.25	CG500-2	•		•		•		
CG500-42	M10-1.25	CG500-2	•		•		•		
CG500-43	M10-1.50	CG500-2	•		•		•		
CG500-48	M12-1.25	CG500-2	•		•		•		
CG500-49	M12-1.50	CG500-2	•		•		•		
CG500-54	M14-1.50	CG500-2	•		•		•		
CG500-55	M14-2.00	CG500-2	•		•		•		
CG500-60	M16-1.50	CG500-2	•		•		•		
CG500-61	M16-2.00	CG500-2					•		
CG505-1	Housing	CG500-2							•
CG508	Housing	CG500-2							
CG10F	Cross Bar	CG500-2	•	•	•				
CG250-8A	Slide Screw, 5/8"-18 UNF x 18 9/16"	CG500-2	•	•	•				
CG250-9	Slide Hammer, 2 lb	CG500-2	•	•	•				
CG325-6	Nut	CG500-2	•	•	•				
CG5151-1	Plastic Case		•	•	•				

WARNING • Read safety precautions on pages W1 to W4

EXTRACTORS: DOWEL PIN PULLERS

Dowel Pin Puller Set Components

CG503

Stock No.	Collet Size	Set Contains: CG503	CGM503	CG513	CG503S
CG503-2	1/4"	•			
CG503-3	5/16"	•			
CG503-4	3/8"	•			
CG503S1	3/8" Square				
CG503-5	7/16"	•			
CG503-6	1/2"	•			
CG503-7	9/16"	•			
CG503-8	5/8"	•			
CG513-4	3/4"			•	
CG513-5	7/8"			•	
CG513S1	1/2" Square				
CG513S2	5/8" Square				
CG513-6	1"			•	
CG503-9	6 mm		•		
CG503-10	8 mm		•		
CG503-11	10 mm		•		
CG503-12	12 mm		•		
CG503-13	14 mm		•		
CG503-14	16 mm		•		
CG503-1	Housing	•	•		•
CG513-1	Housing				
CG513-2	Slide Screw			•	
CG10F	Cross Bar	•	•		•
CG250-8A	Slide Screw, 5/8"-18 UNF x 18 9/16"	•	•		•
CG4567O	Slide Hammer, 10 lb			•	
CG250-9	Slide Hammer, 2 lb	•	•		•
CG325-6	Nut		•		•
CG513-3	Nut			•	

Pipe Nipple Remover Set Components

CG500P

CG505P

CG508P

Stock No.	Collet Size	Housing Stock No.	Set Contains: CG500P	CG505P	CG508P
CG500P1	1/8" NPT	CG500-2	•		
CG500P2	1/4" NPT	CG500-2	•		
CG500P3	3/8" NPT	CG500-2	•		
CG505P1	1/2" NPT	CG505-1		•	
CG505P2	3/4" NPT	CG505-1		•	
CG508P1	1" NPT	CG508-2			•
CG508P2	1 1/4" NPT	CG508-2			•
CG508	Housing	CG500-2			•
CG500-2	Housing	CG500-2	•		
CG505-1	Housing	CG500-2		•	

Note: Avoid bottoming or shouldering studs to avoid shearing or damaging stud or workpiece.

Serrated Collets

- Serrated gripping portions are used to remove unthreaded studs that cannot be removed with standard collets due to lack of gripping surface
- Avoid bottoming or shouldering studs to avoid shearing or damaging stud or workpiece

CG500-23

Stock No.	Description
CG500-20	1/4" Collet
CG500-21	5/16" Collet
CG500-22	3/8" Collet
CG500-23	7/16" Collet
CG500-24	1/2" Collet
CG500-2	Housing

Heavy Duty Housing with Collet

- Collets are threaded to order: specify stud thread size when ordering. Example: CG510 1 3/4"-10 collet
- Avoid bottoming or shouldering studs to avoid shearing or damaging stud or workpiece

CG510 For larger stud sizes 1 5/8"–2".
CG511 For larger stud sizes 2"–2 1/2".
CG512 For larger stud sizes 2 1/2"–3".

What Type of Puller do I Want to Use? Will it be the Combination that Works the Best?

Tools to Use

Jaw Type Puller. Two or three jaw style, with three jaw being the best choice. Manual or hydraulic with outside jaw positions.

Push/Pull Puller. Use male or female adaptors to thread into tapped holes on components.

Slide Hammer Puller. Use on light duty applications. For use with attachments.

Bar Type Puller with Bearing Separator. Bar type with side rods threaded into bearing separator provides "knife edge" to get behind component or when there is not a good gripping edge.

Removing a Gear, Bearing, Pulley, or Other Component from a Shaft



Tools to Use

Push/Pull Puller. Use male or female adaptors.

Bar Type Puller with Bearing Separator. Use when housing lacks sufficient surface for puller side rods to bear against.

Slide Hammer Puller. Use on light duty applications. For use with attachments.

Slide Hammer Puller. Use with male or female adaptors. See this section for a full listing of compatible adaptors.

Pulling a Shaft Out of a Housing or Bore



Tools to Use

Jaw Type Puller. For inside jaw positions (inside pulls), a manual or hydraulic jaw type puller can be used with pressure screw or slide hammer variations.

Expanded Collet Puller. The inside diameter should range between 1/4 and 7". Pulling can be done with bridge, bar type yokes or slide hammers.

Bearing Adaptors with Slide Hammer Puller. CJ127A, CJ128A and CJ137 bearing adaptors with CJ97-3A slide hammer should be used in this application.

Bar Type Puller with Bearing Separator. Bar type with side rods threaded into bearing separator provides "knife edge" to get behind components or when there is not a good gripping edge.

Removing a Bearing or Bushing from a Blind Hole



Determine the "Reach" and "Spread" Needed

The puller's reach must equal or exceed the same distance on the part. The puller's spread is the width of the part.

Estimate the Puller Tonnage

Generally, if you already have the correct "reach and spread," you will usually have the proper tonnage. If in doubt, use the next larger size.

General Rule to Choose Pullers

Manual Pullers. Pressure screw should be at least half the diameter of the shaft on the pulling/pushing job.

Hydraulic Pullers. Maximum tonnage capacity (tons) should be 8 to 10 times the diameter (in inches) of the shaft to be pulled or pushed.



Snap-on® Puller Features

Anvil Head: Curved at the top and features a hex design. The curved head provides a striking surface to handle those tough pulling jobs while the hex allows the pressure screw to be easily turned with a standard hex wrench or a socket.

Spring Loaded Locking Mechanism: Snap-on pullers feature a unique spring tension locking mechanism which allows the puller jaws to easily lock onto the work surface for both "outside" and "inside" pulling applications.

Two Position Yoke: Allows jaws to be easily reversed to accommodate inside or outside pulling situations. Interchangeable yokes accommodate two and three jaw setups. Yokes are heat treated for additional strength and safety.

One Piece Jaw Construction: Provides a stronger, safer jaw. Most competitive puller jaws have holes drilled through them to allow for a bracket attachment. This hole significantly weakens the competitor's puller jaws.

Forged Jaws: Resist breakage, prolong tool life and provide additional strength.

Replaceable Points: Center pulling power to prevent cocking. Provide less friction and minimum drag for easier turning of pressure screw during the pulling process. If damage occurs, simply replace the point and not the entire pressure screw.

Curved Jaws: Provide positive grip on the work surface.

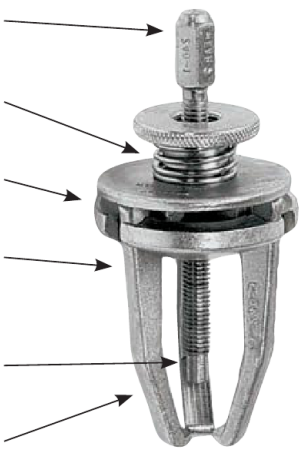

PULLERS: BAR-TYPE INTERCHANGEABLE

CJ83C

Interchangeable bar style pullers provide high quality pulling equipment with the versatility needed to handle a wide variety of pulling functions. Standardized pressure screw threading, jaw retention and design means that new components can be added to an existing puller to change its reach or spread in order to handle new or different applications.
These Snap-on® bar-style pullers also feature:

- Replaceable pressure screw points help keep the puller safely centered
- Multiposition yokes help keep the jaws properly aligned with the item being pulled
- Adjustable clamp bolts allow jaws to be snugged up against the job for a safer, more convenient pull
- Spring ball pin retention securely holds jaws while allowing quick jaw changes

CJ82B

CJ83C Pulley and Gear Puller
Ideal for servicing crankshaft pulleys, gears and timing gears on a wide range of gasoline and diesel engines including Cummins® accessory drives and water pumps. Includes each 3/8"-16 x 3", 5/16"-18 x 2 1/2" and M10-1.5 x 65 mm bolts. Nominal capacity is 3 1/2 tons.

CJ86-1 Yoke
CJ83-3 Pressure Screw
CJ66-15-3 Centering Point
ME5A54 Washer (1 needed)
ME5A55 Washer
ME3A45 Studs (2)
ME3A44 Studs (2)
ME3A75 Studs (2)

CJ81D

CJ82B Pitman® Arm Puller
Handles many *Pitman* arm applications plus a variety of general pulling jobs. Nominal capacity is 6 tons.

CJ86-1 Yoke
CJ83-2 Pressure Screw
CJ66-15-3 Centering Point
CJ81-2A Jaws (2)
CJ86-4A Clamp Bolt
CJ85-4 Washer (2)
ME4A33 Clamp Nuts (2)
CJ105-11 Jaw Pins (2)

CJ81D Differential Side Bearing Puller
Narrow jaws slip into housing grooves in back of bearing and let jaws seat and pull along with inner race. Jaws are locked onto bearing by clamp bolt. Four centering plates are included. Nominal capacity is 6 tons.

CJ86-1 Yoke
CJ83-2 Pressure Screw
CJ66-15-3 Centering Point
CJ81-2A Jaws (2)
CJ86-4A Clamp Bolt (2)
ME4A33 Clamp Nuts (2)
CJ105-11 Jaw Pins (2)
CJ81B1A Adaptors (set of 4)
CJ81B2A Adaptors (set of 4)
CJ81D1A Adaptors (set of 4)
CJ81D2A Adaptors (set of 4)

CJ85A

CJ85A Truck Differential Side Bearing Puller
Similar in appearance to CJ81D but bigger for handling truck applications. Four centering plates included. Nominal capacity is 7 1/2 tons.

CJ85-1 Yoke
CJ83-2 Pressure Screw
CJ66-15-3 Centering Point
CJ85-2 Jaws (2)
CJ85-3A Clamp Bolt (2)
CJ85-4 Washer (2)
ME4A33 Clamp Nuts (2)
CJ105-11 Jaw Pins (2)
CJ85-5 Adaptors (set of 4)
CJ85-6 Adaptors (set of 4)
CJ85-7 Adaptors (set of 4)
CJ85-8 Adaptors (set of 4)

CJ80A

CJ80A A/C Pulley Puller
Also excellent for removal of alternator, generator, power steering and crankshaft pulleys, harmonic balancers and fiber timing gears. Includes an extra pair of jaws for versatility. Nominal capacity is 7 1/2 tons.

CJ85-1 Yoke
CJ83-3 Pressure Screw
CJ66-15-3 Centering Point
CJ81-2A Jaws (2)
CJ87-1 Jaws (2)
CJ85-3A Clamp Bolt
CJ85-4 Washer (2)
ME4A33 Clamp Nuts (2)
CJ105-11 Jaw Pins (2)

Specifications (see chart on next page)

Stock No.	Nominal Capacity, tons	Maximum Reach, inches	Maximum Spread, inches	Pressure Screw Size, inches	Pressure Screws	Jaws	Centering Points
CJ83C	3.5	Variable	5	3/4-16 x 3 1/2	B1, B2	—	C2
CJ82B	6	2 1/4	3 3/8	3/4-16 x 4 1/4	B1, B3	D1, D2, D4, D5	C2
CJ81D	6	1 5/8	3 3/8	3/4-16 x 4 1/4	B1, B3	D1, D2, D4, D5	C2
CJ85A	7.5	1 3/4	5 1/2	3/4-16 x 4 1/4	B1, B3	D1, D2, D3, D5	C2
CJ80A	7.5	D3: 1 5/8, D5: 1 3/8	5	3/4-16 x 3 1/2	B1, B2	D1, D2, D4	C2

CJ Interchangeable Pullers—Major Components

	CJ83C	CJ82B	CJ81D	CT85A	CJ80A	Component	Key No.	Stock No.	Specific Dimensions	
A 									**Usable Range, inches**	**Pin Holes per Side**
						Yoke	A1	**CJ100-1**	10 1/2–16	4
						Yoke	A2	**CJ118-1**	6–10 1/2	3
				•	•	Yoke	A3	**CJ85-1**	3–6 1/2	3
	•	•	•			Yoke	A4	**CJ86-1**	1 3/4–4 1/2	2
B									**Thread x Length**	**Hex Size, inches**
						Pressure Screw	B1	**CJ105-3**	3/4–16 x 10 1/2	7/8
		•	•	•		Pressure Screw	B2	**CJ83-2**	3/4–16 x 6 11/16	7/8
	•				•	Pressure Screw	B3	**CJ83-3**	3/4–16 x 5 1/8	7/8
C									**Head Diameter, inches**	**Point Type**
	•	•	•	•	•	Point	C1	**CJ66-15-3**	5/8	90° Outward
						Point	C2	**CJ84-16**	7/8	90° Outward
D									**Maximum Reach, inches**	
						Jaws (2 needed)	D1	**CJ116-1**	8 1/4	—
						Jaws (2 needed)	D2	**CJ282-1**	4 3/8	—
		•	•		•	Jaws (2 needed)	D3	**CJ81-2A**	1 3/8	—
				•		Jaws (2 needed)	D4	**CJ85-2**	1 3/4	—
					•	Jaws (2 needed)	D5	**CJ87-1**	1 3/8	—
E 									**Maximum Length, inches**	
						Clamp Bolts	E1	**CJ100A2**	18	—
						Clamp Bolts	E2	**CJ118-2A**	11 1/2	—
				•	•	Clamp Bolts	E3	**CJ85-3A**	7 1/2	—
		•	•			Clamp Bolts	E4	**CJ86-4A**	5	—
F									**Inside Diameter, inches**	**Outside Diameter, inches**
		•	•	•	•	Washer (2 needed)	F1	**CJ85-4**	15/32	7/8
	•					Washer (1 needed)	F2	**ME5A54**	11/32	3/4
	•					Washer (1 needed)	F3	**ME5A55**	9/32	3/4
G									**Thread Size**	
		•	•	•	•	Clamp Nuts (2 Needed)	G1	**ME4A33**	7/16 x 20	—
H									**Diameter, inches**	**Length, inches**
		•	•	•	•	Jaw Pins (2 needed)	H1	**CJ105-11**	5/16	1 15/32
J									**Outside Diameter, inches**	**Step Diameter, inches**
			•			Adaptors (Set of 4)	J1	**CJ81B1A**	1 1/2	1 1/8
			•					**CJ81B2A**	1 5/8	1 1/4
			•					**CJ81D1A**	1 3/4	1 1/8
			•					**CJ81D2A**	1 11/32	15/16
				•		Adaptors (Set of 4)	J2	**CJ85-5**	2	1 1/2
				•				**CJ85-6**	2 1/8	1 21/32
				•				**CJ85-7**	2 1/2	1 27/32
				•				**CJ85-8**	3 1/16	2 3/8
K 									**Thread x Length**	
	•					Studs (2 needed)	K1	**ME3A44**	3/4-16 x 3	—
	•					Studs (2 needed)	K2	**ME3A45**	5/16-18 x 2 1/2	—
	•					Studs (2 needed)	K3	**ME3A75**	M10-1.5 x 65 mm	—

Letters in chart refer to Key No. in chart below (A3, B1, C1, etc.)

CJ Series Major Components

Stock No.	A Yoke	B ressure Screw	C Point	D Jaws (2)	E Clamp Bolt	F Washers (2)	G Clamp Nuts (2)	H Jaw Pins (2)	J Adaptors	K Studs (2)	Pressure Screws	Jaws	Points
CJ83C	A4	B3	C1	—	—	F2, F3	—	—	—	K1, K2, K3	B1, B2	—	C2
CJ82B	A4	B2	C1	D3	E4	F1	G1	H1	—	—	B1, B3	D1, D2, D4, D5	C2
CJ81D	A4	B2	C1	D3	E4	F1	G1	H1	J1	—	B1, B3	D1, D2, D4, D5	C2
CJ85A	A3	B2	C1	D4	E3	F1	G1	H1	J2	—	B1, B3	D1, D2, D3, D5	C2
CJ80A	A3	B3	C1	D3, D5	E3	F1	G1	H1	—	—	B1, B2	D1, D2, D4	C2

Other Interchangeable Components

⚠WARNING

- Screen puller application
- Inspect the puller, do not use damaged parts
- Use the proper type and size puller for the job
- Read safety precautions on pages W1 to W4

PULLERS: BAR-TYPE INTERCHANGEABLE

CJ2000SB

These puller sets are designed to provide the tools you need as your work grows. Start with one or more sets geared to specific tasks and build toward the ultimate set: the CJ2000A with display board and cabinet. No duplication in set contents or jaws. Yokes are interchangeable for added versatility.

Master Interchange Puller Set

CJ2000SB Master Interchangeable Puller Set
Includes all components for the CJ2001, CJ2002, CJ2003A, CJ2004 and CJ2005 puller sets on VE200A tool control board and KRA276D locking wall storage cabinet.

CJ2000S Master Interchangeable Puller Set
Same as CJ2000SB without the wall cabinet.

CJ2000A Master Interchangeable Puller Set
Same as CJ2000SB without the wall cabinet or the tool control board.



CJ2002

Gear Puller Set

CJ2002 Gear Puller Set
CJ2002 Gear Puller Set
Use on Pitman® arms, timing gears, carrier side bearings and more. Combine to create ten different pullers. Capacity from 6–10 tons depending on yoke and jaws used. Includes:

CJ105-11 Long Jaw Pin (4)
CJ87-1 3" Jaw (2)
CJ282-1 6" Jaw (2)
ME4A33 Hex Nut (4)
CJ82B *Pitman* Arm Puller
CJ66-15-3 Centering Point
CJ83-3 Pressure Screw (9/16" hex)
CJ81-2A Jaw (2)
CJ84-16 Centering Point
CJ83-2 Pressure Screw
CJ85-1 Yoke (3"-6 1/2")
CJ86-4A Bolt
CJ85-3A Bolt
CJ86-1 Yoke (1 3/4"–4 1/2")
CJ85-4 Washer (4)

CJ2003A

Rear Axle Puller Set

CJ2003A Rear Axle Puller Set
Slide hammer power pulls many flange type rear axles as well as axle bearings. Includes:

CJ105-4B Slide Screw, 3/4"-16 x 22 1/2"
CJ137 Bearing Adaptor
CJ97-3A Slide Hammer, 3 3/4 lb
CJ123-1 Axle Yoke
ME4A8 Lock Nut (3/4")
CJ127A Bearing Adaptor
CJ66-19 Bearing Hook
CJ128A Bearing Adaptor

CJ Series Bearing Adaptors

Stock No.	Swivel Head Width, inches	Swivel Head Length, inches	Overall Length, inches
CJ127A	1.2	2.03	3.02
CJ128A	1.2	2.31	3.15
CJ137	1.2	2.9	3.24

CJ2004

Interchangeable Puller Set

CJ2004 Interchangeable Puller Set
Use on bearings, bearing races, gears, bushing retainers, etc. Builds any of 12 different pullers. Two and three jaw capability with three sets of jaws. All jaws reverse for inside and outside pulls. Pulling capacity: (short jaws) 4 1/2 ton, (medium jaws) 6 1/2 ton, (large jaws) 8 ton. Includes:

CJ105A8 3-Way Jaw Control
CJ105-3 Pressure Screw (3/4"-16 x 13")
CJ105A9 2-Way Jaw Control
CJ105-1 Yoke
CJ105-5 Small Jaw (3)
CJ105-10 Short Jaw to Control Pin (3)
CJ105-6 Medium Jaw (3)
CJ105-11 Long Jaw Pin (4)
CJ105-7 Large Jaw (3)
CJ105-12 Cross Bar
CJ66-15-3 Centering Point
CJ86-1 Yoke (1 3/4"–4 1/2")

CJ2005

Accessory Set

CJ2005 Accessory Set
Boost the versatility of the CJ2000A components with a bearing separator, a variety of centering adaptors, and a 12" yoke and clamp bolt to add spread to your bar type set. Includes:

CJ81B1A Adaptor (1 1/8"–1 1/2" Diameter)
CJ85-6 Adaptor (1 21/32"–2 1/8" Diameter)
CJ81B2A Adaptor (1 1/4"–1 5/8" Diameter)
CJ85-7 Adaptor (1 27/32"–2 1/2" Diameter)
CJ81D1A Adaptor (1 1/8"–1 5/8" Diameter)
CJ85-8 Adaptor (2 3/8"–3 1/16" Diameter)
CJ81D2A Adaptor (13/16"–1 11/32" Diameter)
CJ118-1 Yoke (6"–10 1/2")
CJ85-5 Adaptor (1 1/2"–2" Diameter)
CJ85-2 Jaw (1 3/4" Maximum reach)
CJ950 Bearing Separator
CJ118-2A Bolt

Pressure Screws

CJ83-9 Pressure Screw
Optional pressure screw for bar style intechangeable pullers. Applications include heavy duty truck transmissions like Eaton® transmissions found on Kenworth® heavy duty trucks. Can also be used with: CJ2000A, CJ2000S, CJ2000SB, CJ2002 and CJ2004. Thread: 3/4"-16. Length: 8 3/4".

Bolt Grip Puller Set

CJ2001P Bolt Grip Puller Set
Services steering wheels, flywheels, pulleys and gears with tapped holes. Includes a four-position two- and three-way yoke, three different pressure screw tips and an assortment of fractional and metric bolts. Approximate spread to bolt is 1 1/4"–3 13/16". Includes PB54B storage case.

CJ2001P

CJ2001FBK Bolt and Washer Set
Replaces all fractional bolts and washers in CJ2001P bolt grip puller set.

CJ2001MBK Bolt and Washer Set
Replaces all metric bolts and washers in CJ2001P bolt grip puller set.

Small/Pilot Bearing Pullers

A78 Small Bearing Puller
For bearings and bushings typically found in small electric motors. Includes large jaw set for bronze and oilite bushings and small jaw set for smaller bearings and bushings. Up to 3 tons of pulling power. Working range is 1/2"–2".

A78

SP2031A Pilot Bearing Puller
- Attaches to slide hammer shafts with 3/4"-16 or 5/8"-18 threads
- Pressure screw adaptor is made of stress-resistant steel
- Industrial finish

SP2031

Small Slide Hammer Puller Set

CJ93B Small Slide Hammer Puller Set
Remove bushings, seals, sleeves, bearings, bearing races, bronze and oilite bushings and pressed-in studs. Includes two sets of jaws, grease retainer adaptor, bearing hook, body dent puller, stud pulling head and 2 lb slide hammer. Thread size is 3/8-16.



CJ93B

Tapped Hole Puller Set

CG60GB Tapped Hole Puller Set
Use on steering wheels with tapped holes. Includes two- and three-way yoke, pressure screw and adaptor plus four sets of studs.

CG60GB

Rear Axle Bearing Puller

CJ9180 Rear Axle Bearing Puller
No slide hammer required. Removes axle bearing on free-floating axle designs. Use with impact gun or by hand. Uniquely designed to brace against axle housing for complete removal of bearing assembly. Smooth, steady operation. Kit contains interchangeable feet to allow pulling of bearings with an I.D. from 1"–2 7/8"

CJ9180

AUTOMOTIVE

Steering Wheel Pullers

CJ134 Tilt Steering Pivot Pin Puller
Allows efficient removal of the two pivot pins on all tilt steering columns used on Chrysler®, Ford® and GM® vehicles.

CJ134

CG95B Steering Wheel Lock Plate Remover
Designed for airbag equipped Saginaw steering columns found on *GM*, *Chrysler* LH Series (LHS®, Intrepid®, Concorde and Eagle Vision), some Toyota® and Saab® vehicles. Includes one narrow bridge, one wide bridge, two pressure screws: one has 9/16"-18 threads, the other has M14-1.5 threads. The puller is zinc plated. Overall length is 4 7/8".

CG95B

CG6095A Master Steering Wheel Puller Set
Combines the CG60GB Tapped Hole Puller and CG95B Lock Plate Remover. Lock Plate Remover is designed for servicing airbag equipped Saginaw steering columns found on *GM*, *Chrysler* LH Series (*LHS*, *Intrepid*, Concorde and Eagle Vision), some *Toyota* and *Saab* vehicles.

CG6095A

CJ145 Steering Wheel Puller for *GM* Vehicles
Use on new *GM* steering wheels with air bags including tilting and telescoping styles. Handle attachment facilitates puller setup and can be removed when working in confined areas. Applications: Buick® (1997 and later Park Avenue/Regal), Cadillac® (1997 and later Catera), Chevrolet®/GMC® (1997 and later Corvette®/Malibu®, 1998 C & K series trucks, 1998 full size vans, 1998 Astro/Safari® vans), Oldsmobile® (1997 and later Cutlass) and Pontiac® (1988–1993 LeMans, 1997 and later Grand Prix®/Trans Sport van).

CJ145

CJ131P Steering Wheel Puller and Lock Plate Depressor Set
Includes a selection of bolts and a handle in PB72 storage case for servicing *GM*, *Ford*, *Chrysler* and AMC® vehicles. Adaptors are included for servicing lock plates on all *GM* and *AMC* vehicles with tilt wheel. Detachable handle helps hold puller when turning force is applied to pressure screw. Industrial finish.

CJ131P

⚠WARNING

- Screen puller application
- Inspect the puller, do not use damaged parts
- Use the proper type and size puller for the job
- Read safety precautions on pages W1 to W4

PULLERS: AUTOMOTIVE

Harmonic Damper Pulley Pullers

YA6490A

YA6490A Harmonic Damper Pulley Puller
- New spring-loaded legs allow for leg position retention
- Provides greater ease and control when installing the puller in confined areas
- Removes harmonic damper pulleys found on many Chrysler® and GM® engines
- Used on autos, pickups, SUVs and vans

YA6491A Harmonic Damper Pulley Puller Update Kit
- Updates earlier YA9740 pullers to the same applications as the new YA6490A
- Kit updates other pulley pullers that are similar to the YA9740 series of pullers
- Add YA6491 Update Kit to existing YA9740 series pullers to add these new applications: GM: 4.2 L straight 6 cylinder: Chevy® Trailblazer®, GMC® Envoy®, Oldsmobile® Bravada® (2003 and later), Buick® Rainier (2004 and later), 3.5 L Straight 5 cylinder: *Chevy* Colorado®, *GMC* Canyon® (2004 and later), Hummer® H3 (2006 and later), 2.8 L straight 4 cylinder: *Chevy Colorado*, *GMC Canyon* (2005 and later)

CJ146

CJ146 Harmonic Damper Pulley Puller
- Remove the crankshaft harmonic balancer on 1990 and later 3.3 L and 3.8 L *GM* engines
- Shoulder bolt adaptors provide correct installation depth, preventing damage to the crank sensor and interrupter rings
- Includes three CJ146-1 adaptors and one CJ146-2 extension plus vinyl storage pouch; requires Snap-on® CJ98-1 yoke and CJ83-3 pressure screw for use (not included)

CJ117C

CJ117C Power Steering and Alternator Pulley Puller
Includes short adaptor to remove small flange type pulley; use long adaptor on *GM* 200/Platform vehicles. Can also remove *Chrysler* alternator pulleys that have double grooves. Replace pulleys with CJ113B Installer. Long adaptor included to handle pulleys on *GM* minivans. Nickel/chrome finish, industrial finish screw. Designed for most domestic cars. (Replace pulley with CJ122 sets). Long adaptor included to handle pulleys on *GM* minivans. Nickel/chrome finish, industrial finish screw.

CJ124A

CJ124A Power Steering/Alternator Pulley Puller
This is a larger version of CJ117C. Designed for *Chrysler*, Ford® and earlier *GM* vehicles.

CJ3PSA

CJ3PSA Power Steering and Alternator Pulley Puller/Installer Set
Set includes CJ113B, CJ117C, and CJ124A pullers.

CJ147A

CJ147A Power Steering Gear Lower Pinion Bearing Puller
- Required tool to comply with GM *R*ecall Bulletins #02049 and #03062 regarding power steering gear lower pinion bearing separation

Applications:
Buick:
Regal® 1996–1998
Chevrolet:
Cavalier 1996–1998
Lumina 1997–1998
Lumina APV 1996
Monte Carlo® 1997–1998
Venture 1997–1998
Oldsmobile:
Cutlass 1997–1998
Cutlass Supreme 1996–1998 Silhouette 1996–1998
Intrigue 1998
Pontiac®:
Grand Prix® 1996–1998
Sunfire® 1996–1998
Trans Sport 1996–1998

Power Steering and Alternator Pullers

CJ122

CJ122 Power Steering Pulley Installer Set
Includes CJ113B Installer and CJ113C4 Pulley Installer Shaft. Thread size of 5/8"-18UNF-2A (puller end), 3/8" 16UNC-2A (shaft end).

CJ138

CJ138 Pulley Installer
8 mm pulley installer features a black industrial finish and a thrust bearing for easier installation.
Applications: power steering pulley on *Ford* 4.6 L V8 (1991 and later), *Ford* 2.5 L V6 (1995 and later) plus the installation of water pump drive pulleys on *GM* 4.6 L (1992 and later *Oldsmobile* Aurora).

CJ113B

CJ113B Power Steering/Alternator Pulley Installer
Designed for domestic cars. 1" pulley driver hex, 7/16" pressure screw hex, thread size of 5/8"-18UNF-2A (puller end), 3/8" 16UNC-2A (shaft end). 4 5/8" long.

CJ113B3 Bushing
Included with CJ113B.

CJ113C4 Pulley Installer Shaft
- Thread size of 5/8"-18UNF (puller end), 3/8"-16UNC (alternator end)

CJ132A Master Power Steering Pump/Alternator Puller/Installer Set
GM Quad 4, *GM* 3.1 L and Ford® 4.6 L applications. Removes/installs press on, belt driven accessory pulleys. Removal housing for grooved hub diameters of 1 1/8", 1 5/16" and 1 3/8". Includes components for 3/8"-16 threaded shaft. Housing holding bar prevents main housing from spinning during use with an impact wrench. Quad 4 installation nut simplifies usage with 4 cylinder *GM* vehicles. Includes instructions and carrying case.

CJ132-1 Pulley Tool
CJ132-2 Sleeve
CJ132-3 Installation Nut
CJ132-4 Quad 4 Removal Pin
CJ132-5 Quad 4 Installer
CJ132-6 *GM* 3.1L Installer
CJ132-7 Installer (3/8"-16)
CJ132-8 *Ford* 4.6L Installer
CJ1329 Universal Removal Pin
CJ13210 Housing Holding Bar
CJ13211 Quad 4 Installation Nut
CJ13212 Threaded Shaft
CJ13213 Removal Housing
CJ13214 Bearing
CJ13215 Washer
CJ132AIS Instruction Sheet

CJ132A

Pitman® Arm Pullers

CJ119B *Pitman* Arm Puller
- Designed for most US cars and light trucks. Pressure screw size: 3/4"-16 x 6 7/8". Industrial finish

CJ115 *Pitman* Arm Puller
- Similar in design to CJ119B except it is designed for compact and intermediate size cars

PAR1188 Heavy Duty Pitman Arm Puller
- Removal of large pitman arms on ¾ to 1 ton pick up trucks

Applications: *Ford* F-250/350 (2000 and later), Dodge 2500/3500 (2011 and later), Chevrolet/GMC 2500/3500 (2011 and later)

YA6880 Low-Profile *Pitman* Arm Puller
- Fits in the confined space on most *GM* 1988–2000 C & K chassis trucks and SUVs. Also fits 2001–present trucks and SUVs with steering gear box/ *Pitman* arms. Forged chromoly steel for strength and durability. Design allows the technician to remove the arm off the steering gear box without altering the boxes position as a substantial time saver. Patent pending

CJ119B

YA6880

GENERAL PURPOSE INTERCHANGEABLE

Light Duty Builds Pullers:

Stock No.	Puller Type	Maximum Reach, inches	Outside Spread, inches	Inside Spread, inches
CG240	2-Jaw	2 1/2	0–3	7/8–3 1/4
CG240H	2-Jaw	2 1/2	0–3	7/8–3 1/4
CG243	3-Jaw	2 1/2	0–3	7/8–3 1/4
CG243H	3-Jaw	2 1/2	0–3	7/8–3 1/4

CG2400B Light Duty Puller Set
This versatile set provides two- or three-jaw pulling with pressure screw or slide hammer options. Interchange parts to build any of the four puller combinations.
- Up to 2 1/2 tons of pulling power
- 3" diameter capacity for outside pulls

CG2400B

Medium Duty Builds Pullers:

Medium duty pullers deliver up to 7 1/2 tons of pulling power, 4 1/2" diameter capacity for outside pulls and from 3/4"–8" diameter capacity for inside pulls. CG6223 hydraulic conversion set converts CG250 and CG253 manual pullers to hydraulic power. The manual components of the indicated medium duty pullers are included in the heavy duty (CG2500/CG2510 Series) sets.

Stock No.	Puller Type	Maximum Reach, inches	Outside Spread, inches	Inside Spread, inches
CG250	2-Jaw	3	0–4 1/2	1 1/2–3 1/2
CG250H	2-Jaw	3	0–4 1/2	1 1/2–3 1/2
CG250HL	Long Jaw, 2-Jaw	6	0–8 1/2	3/4–8
CG253	3-Jaw	3	0–4 1/2	1 1/2–3 1/2
CG253H	3-Jaw	3	0–4 1/2	1 1/2–3 1/2
CG253L	3-Jaw	6	—	3/4–8

CG250

⚠WARNING

- Screen puller application
- Inspect the puller, do not use damaged parts
- Use the proper type and size puller for the job
- Read safety precautions on pages W1 to W4

PULLERS: GENERAL PURPOSE INTERCHANGEABLE

CG2510BSHY

Heavy Duty

Builds Pullers:

Stock No.	Puller Type	Maximum Reach, inches	Outside Spread, inches	Inside Spread, inches
CG654HY	Hydraulic, 2-Jaw	3	0–4 1/2	1 1/2–3 1/2
CG655HY	Hydraulic, 3-Jaw	3	0–4 1/2	1 1/2–3 1/2
CG270	2-Jaw	5 1/2	0–8 1/2	2 1/2–7
CG270H	2-Jaw	5 1/2	0–8 1/2	2 1/2–7
CG270S	Special Grip, 2-Jaw	5 1/2	0–8 1/2	2 1/2–7
CG273	3-Jaw	5 1/2	0–8 1/2	2 1/2–7
CG273H	3-Jaw	5 1/2	0–8 1/2	2 1/2–7
CG280	Long Jaw, 2-Jaw	8	0–10	3–8
CG283	Long Jaw, 3-Jaw	8	0–10	3–8
CG274HY	Hydraulic, 2-Jaw	8 3/4	10	3–8
CG275HY	Hydraulic, 3-Jaw	8 3/4	0–10	3–8

The CG2510 and CG2500 Series deliver:
- Up to 12 1/2 tons of pulling power
- 10" diameter capacity for outside pulls
- From 3/4"–8" diameter capacity for inside pulls

CG2510BSBHY Heavy Duty Manual/Hydraulic Puller Set
Includes 40 interchangeable components, including the CG1224 10 ton hydraulic power kit. All components are displayed on a VE213 tool control board, which is mounted inside a KRA276D wall cabinet.

VE213 Tool Control Board
Tool control board for the CG2500BSBHY manual/hydraulic puller set.

CG2500BSB

CG2150BSBHY

The big CG2510BSBHY set builds 45 different pullers with dozens of pulling variations from the included 40 components and 10 ton hydraulic set. Without hydraulics (CG2500BS Manual Set), 32 separate pullers are still possible. Add the Snap-on® CG6223 6 ton hydraulic power kit and add seven puller combinations to each set.

CG2510BSHY Heavy Duty Manual/Hydraulic Set
Same as CG2510BSBHY set mounted on a VE213 tool control board. Does not include the wall cabinet.

CG2510BHY Heavy Duty Manual/Hydraulic Puller Set
Same as CG2510BSBHY Set except it does not include either the tool control board or the wall cabinet.

CG2500BSB Heavy Duty Manual Puller Set
This is the CG2510BSBHY set less the 10 ton hydraulic power kit components. Tool control board for this set is VE113B; wall cabinet is KRA276D.

VE113B Tool Control Board
Panel "A" is designed to hold the components for CG2500BS interchangeable puller set (6, 7 1/2, 10 and 12 1/2 ton capacity). Also used as the tool control board for the CG2500BSB manual puller set.

CG2500BS Heavy Duty Manual Puller Set
Same as CG2500BSB set mounted on a VE113B tool control board, without the KRA276D wall cabinet.

CG2500B Heavy Duty Manual Puller Set
Same as CG2500BSB set, without the tool control board or the wall cabinet.

YA13450

Pulley Pullers

YA13450 Harmonic Dampener Pulley Puller
- Use on 3.5L and 5.7L Dodge® engines
- Unique design accesses pulley on internal pulley ledges

YA13350

YA13350 Harmonic Dampener Pulley Puller
- Use on 3.6L Camaro® engines
- Unique design accesses pulley on internal pulley ledges

PULLERS: 2-JAW PRESSURE SCREW

2 Ton Capacity (1.8 t), 2-Jaw

Stock No.	Maximum Reach, inches (mm)	Maximum Spread, inches (mm) inside	Maximum Spread, inches (mm) outside	Pressure Screw Size, inches	Jaw Thickness, inches (mm)	Jaw Width, inches (mm)
CG240	2 1/2 (64)	7/8–3 1/4 (22–83)	3 (76)	3/8-16 x 5 1/16	3/16 (5)	3/8 (10)
CG240L	3 1/2 (89)	7/8–3 3/4 (25–95)	4 (102)	3/8-16 x 6 1/16	3/16 (5)	3/8 (10)

CG240

6 Ton Capacity (5.4 t), 2-Jaw

CG250	3 (76)	1 1/2–3 1/2 (38–89)	4 1/2 (114)	5/8-18 x 6 7/8	1/4 (6)	3/4 (19)
CG250A*	3 (76)	1 1/2–3 1/2 (38–89)	4 1/2 (114)	5/8-18 x 6 7/8	1/4 (6)	3/4 (19)

CG250

CG270A

10 Ton Capacity (9.1 t), 2-Jaw

CG270	5 1/2 (140)	2 1/2–7 1/2 (64–178)	8 1/2 (216)	3/4-16 x 9 13/16	1/4 (6)	15/16 (24)
CG270A*	5 1/2 (140)	2 1/2–7 1/2 (64–178)	8 1/2 (216)	3/4-16 x 9 13/16	1/4 (6)	15/16 (24)
CG272**	5 1/2 (140), 8 3/4 (222)	2 1/2–7 1/2 (64–178), 3–8 (76–203)	8 1/2 (216), 10 (254)	3/4-16 x 9 13/16, 3/4-16 x 12 1/8	1/4 (6)	15/16 (24)
CG270S	5 1/2 (140)	2 1/2–7 1/2 (64–178)	8 1/2 (216)	3/4-16 x 9 13/16	1/4 (6)	15/16 (24)
CG280	8 3/4 (222)	3–8 (76–203)	10 (254)	3/4-16 x 12 1/8	1/4 (6)	15/16 (24)
CG284***	15 (381)	4 3/4–11 1/2 (121–292)	13 3/4 (349)	3/4-16 x 18 15/16	3/8 (10)	1 (25)

CG280

*Includes CG1 pulling plate. **Two jaw lengths. ***Includes pressure screw extension.

3-JAW PRESSURE SCREW

2 1/2 Ton Capacity (2.3 t), 3-Jaw

Stock No.	Maximum Reach, inches (mm)	Maximum Spread, inches (mm) inside	Maximum Spread, inches (mm) outside	Pressure Screw Size, inches	Jaw Thickness, inches (mm)	Jaw Width, inches (mm)
CG243	2 1/2 (64)	7/8–3 1/4 (22–83)	3 (76)	3/8-16 x 5 1/16	3/16 (5)	3/8 (10)
CG243L	3 1/2 (89)	7/8–3 3/4 (22–95)	4 (102)	3/8-16 x 6 1/16	3/16 (5)	3/8 (10)

CG243

6 Ton Capacity (5.4 t), 3-Jaw

CG253L	6 (152)	3/4–8 (19–203)	5/8-18 x 6 7/8	5/8-18 x 6 7/8	5/16 (8)	3/8 (10)

CG253L

7 1/2 Ton Capacity (6.8 t) 3-Jaw

CG253	3 (76)	1 1/2–3 1/2 (38–89)	4 1/2 (114)	5/8-18 x 6 7/8	1/4 (6)	3/4 (19)

12 1/2 Ton Capacity (11.3 t), 3-Jaw

CG273	5 1/2 (140)	2 1/2–7 1/2 (64–178)	8 1/2 (216)	3/4-16 x 9 13/16	1/4 (6)	15/16 (24)
CG273A	5 1/2 (140)	2 1/2–7 1/2 (64–178)	8 1/2 (216)	3/4-16 x 9 13/16	1/4 (6)	15/16 (24)
CG283	8 (203)	3–8 (76–203)	10 (254)	3/4-16 x 12 1/8	1/4 (6)	15/16 (24)
CG285	15 (381)	4 3/4–11 1/2 (121–292)	13 3/4 (254)	3/4-16 x 18 15/16	3/8 (10)	1 (25)

CG285

CG1

Pulling Plate

CG1 Pulling Plate
Ideal where there is no gripping surface for the puller alone. Attach plate to item being pulled – puller clamps behind the plate. Includes four each of the following screws: 1/4"-20 x 3/4" and 1/4"-28 x 1". Plate has a 3 5/8" diameter.

Flat Points

CG270-21 Flat Point
Fits CG270 and CG280 series pullers.

CG300-21 Flat Point
Fits CG300 and CG305 series pullers.

CG70 Flat Point Set
Includes CG270-21, CG300-21 and CG325-21 flat points.

⚠WARNING

- Screen the puller application
- Inspect the puller, do not use damaged parts
- Use the proper type and size puller for the job
- Read safety precautions on pages W1 to W4

PULLERS: 2-JAW SLIDE HAMMER

CG240H

2 Ton Capacity (1.8 t)–1 1/16 lb Hammer

Stock No.	Maximum Reach, inches (mm)	Maximum Spread, inches (mm) inside	Maximum Spread, inches (mm) outside	Slide Screw Size, inches	Jaw Thickness, inches (mm)	Jaw Width, inches (mm)
CG240H	2 1/2 (63)	7/8–3 1/4 (22–82)	3 (76)	3/8-16 x 12 5/8	3/16 (5)	3/8 (10)
CG240HL	3 1/2 (88)	7/8–3 3/4 (25–95)	4 (102)	3/8-16 x 12 5/8	3/16 (5)	3/8 (10)

CG250HL

6 Ton Capacity (5.4 t)–2 1/8 lb Hammer

CG250C*	3 (76)	1 1/2–3 1/2 (38–89)	4 1/2 (114)	5/8-18 x 18 1/16	1/4 (6)	3/4 (19)
CG250H	3 (76)	1 1/2–3 1/2 (38–89)	4 1/2 (114)	5/8-18 x 18 1/16	1/4 (6)	3/4 (19)
CG250HL	6 (152)	3/4–8 (19–203)	—	5/8-18 x 18 9/16	7/32 (5)	5/16 (8)

*Includes CG250H puller, CG1 pulling plate and pressure screw

CG270C

10 Ton Capacity (9.1 t)–3 1/2 lb Hammer

CG270C**	5 1/2 (140)	2 1/2–7 1/2 (64–178)	8 1/2 (216)	3/4-16 x 23 3/8	1/4 (6)	15/16 (24)
CG270H	5 1/2 (140)	2 1/2–7 1/2 (64–178)	8 1/2 (216)	3/4-16 x 23 3/8	1/4 (6)	15/16 (24)

**Includes CG1 pulling plate and pressure screw

PULLERS: 3-JAW SLIDE HAMMER

CG243H

2 1/2 Ton Capacity (2.3 t)–1 1/16 lb Hammer

Stock No.	Maximum Reach, inches (mm)	Maximum Spread, inches (mm) inside	Maximum Spread, inches (mm) outside	Slide Screw Size, inches	Jaw Thickness, inches (mm)	Jaw Width, inches (mm)
CG243H	2 1/2 (64)	7/8–3 1/4 (22–83)	3 (76)	3/8-16 x 12 5/8	3/16 (5)	3/8 (10)
CG243HL	3 1/2 (89)	7/8–3 3/4 (25–95)	4 (102)	3/8-16 x 12 5/8	3/16 (5)	3/8 (10)

CG253H

7 1/2 Ton Capacity (6.8 t)–2 1/8 lb Hammer

CG253H	3 (76)	1 1/2–3 1/2 (38–89)	4 1/2 (114)	5/8-18 x 18 1/16	1/4 (6)	3/4 (19)

CG273C

12 1/2 Ton Capacity (11.3 t)–3 1/2 lb Hammer

CG273C*	5 1/2 (140)	2 1/2–7 1/2 (64–178)	8 1/2 (216)	3/4-16 x 23 3/8	1/4 (6)	15/16 (24)
CG273H	5 1/2 (140)	2 1/2–7 1/2 (64–178)	8 1/2 (216)	3/4-16 x 23 3/8	1/4 (6)	15/16 (24)

*Includes CG273H puller, CG1 pulling plate and pressure screw





2 and 2 1/2 Ton Puller Group (CG240 Series): 1 1/16 lb Hammer (CG240H Series)

Stock No.	2-Jaw Yoke CG240-2	3-Jaw Yoke CG243-2	Std. Pres. Screw CG240-1	Long Pres. Screw CG240-11	Slide Screw CG240-8	Slide Hammer CG240-9	2-Jaw Lock Plate CG240-5	3-Jaw Lock Plate CG243-5	Spring CG240-6	Adj. Nut CG240-7	Std. Jaw CG240-3	Long Jaw CG240-10
CG240	1	—	1	—	—	—	1	—	1	1	2	—
CG240L	1	—	—	1	—	—	1	—	1	1	—	2
CG240H	1	—	—	—	1	1	1	—	1	1	2	—
CG240HL	1	—	—	—	1	1	1	—	1	1	—	2
CG243	—	1	1	—	—	—	1	1	1	1	3	—
CG243L	—	1	—	1	—	—	—	1	1	1	—	3
CG243H	—	1	—	—	1	1	—	1	1	1	3	—
CG243HL	—	1	—	—	1	1	—	1	1	1	—	3

6 and 7 1/2 Ton Puller Group (CG250 Series): 2 1/8 lb Hammer (CG250H Series)

Stock No.	2-Jaw Yoke CG250-2	3-Jaw Yoke CG253-2	Pressure* Screw CG250-1A	Slide* Screw CG250-8A	Slide Hammer CG250-9	Cross Bar CG10F	Lock Plate CG250-5	Spring CG250-6	Adj. Nut CG250-7	Std. Jaw CG250-3	Long Jaw CG250-10	Pulling Plate CG1
CG250	1	—	1	—	—	—	1	1	1	2	—	—
CG250A	1	—	1	—	—	—	1	1	1	2	—	1
CG250C	1	—	1	1	1	1	1	1	1	2	—	1
CG250H	1	—	—	1	1	1	1	1	1	2	—	—
CG250HL	1	—	—	1	1	1	1	1	1	—	2	—
CG253	—	1	1	—	—	—	1	1	1	3	—	—
CG253H	—	1	—	1	1	1	1	1	1	3	—	—
CG253L	—	1	1	—	—	—	1	1	1	—	3	—
CG2500B**	1	1	1	1	1	1	2	2	2	3	3	—

**CG2500B continued in next chart

CG2500B Heavy Duty Manual Puller Set Same as CG2500BSB set, without the tool control board or the wall cabinet.
CG250-20 Replacement Point replacement point.
CG250-8A Slide Screw has 5/8" UNF threads.

10 and 12 1/2 Ton Puller Group (CG270, CG280 Series): 3 1/2 lb Hammer (CG270H Series)

Stock No.	2-Jaw Yoke CG270-2	3-Jaw Yoke CG273-2	Std. Pres.* Screw CG270-1A	Long Pres.* Screw CG270-11A	Man. Adaptor CG270-13	Slide* Screw CG270-8A	Slide Hammer CG66-2	2-Jaw Lock Plate CG270-5	3-Jaw Lock Plate CG273-5	Spring CG270-6	Lock Nut CG270-7	Std. Jaw CG270-3	Long Jaw CG270-10	Special Jaw CG270-3S	Extra Long Jaw CG270-12
CG270	1	—	1	—	—	—	—	—	—	1	1	2	—	—	—
CG270A	1	—	1	—	—	—	—	—	—	1	1	2	—	—	—
CG270C	1	—	1	—	—	1	1	—	—	1	1	2	—	—	—
CG270H	1	—	—	—	—	1	1	—	—	1	1	2	—	—	—
CG270S	1	—	1	—	—	—	—	1	—	1	1	—	—	2	—
CG272	1	—	—	1	—	—	—	1	—	1	1	—	2	—	—
CG273A	—	1	1	—	—	—	—	—	1	1	1	3	—	—	—
CG273C	—	1	1	—	—	1	1	—	—	1	1	3	—	—	—
CG273H	—	1	—	—	—	1	1	—	1	1	1	3	—	—	—
CG280	1	—	—	1	—	—	—	—	—	1	1	—	2	—	—
CG283	—	1	—	1	—	—	—	—	1	1	1	—	3	—	—
CG284	1	—	—	1	1	—	—	—	—	1	1	—	—	—	2
CG285	—	1	—	1	1	—	—	—	—	1	1	—	—	—	3
CG2500B	1	1	1	1	—	1	1	1	1	2	2	3	3	3	—

CG270-20 Replacement point for CG270/CG280 series pullers.
CG270-21 Fits CG270 and CG280 series pullers.
CG270-8A Has 3/4-16" UNF threads.

⚠WARNING

- Screen the puller application
- Inspect the puller, do not use damaged parts
- Use the proper type and size puller for the job
- Read safety precautions on pages W1 to W4

PULLERS: INDUSTRIAL

VE113B Panel A

VE138-3B Panel B

VE138-2B Panel C

VE138-1B Panel D

CG1038KA

Industrial Puller Sets

CG1038KA Industrial Puller Set
Includes more than 35 basic pullers that will assemble into more than 165 puller combinations. Standard pullers in this set have a range from 2–20 tons. The hydraulic power components provide up to 20 tons of easy pulling power. Optional 10 and 50 ton hydraulic accessories are available. Components are mounted on (four) 24" x 32" x 3/4" tool control panels (labeled "A," "B," "C" and "D" below) with white silhouettes. The panels are mounted on KRA213E A-frame.

CG1038K Industrial Puller Set
This is the CG1038KA set but does not include the KRA213E A-frame.

CG1050KA Expanded Industrial Puller Set
Includes CG1038KA set plus the CG1224 power kit for converting 10 ton manual pullers to hydraulic power; CG300-1, CG305-8 and CG350-1 pressure screws; CG343-1 4" plug; CG350-2 manual yoke for converting the 20 ton hydraulic pullers to manual power; and CG555 basic hydraulic set for building a 50 ton hydraulic bar type puller. Also includes CG420-5C pressure gauge, CG420-6 gauge mounting adaptor, ten CG250-20 small centering adaptors and ten CG270-20 large centering adaptors.

KRA213E A-Frame
Mobile unit features 23,220 cu in, 1,260 sq in of storage for convenient access and orderly storage. Measures 26 1/2" x 52 3/8" x 32 3/8".

Tool Control Boards

VE113B Tool Control Board
Panel "A" is designed to hold the components for CG2500BS interchangeable puller set (6, 7 1/2, 10 and 12 1/2 ton capacity). Also used as the tool control board for the CG2500BSB manual puller set.
CG250 Pressure Screw Puller
CG250H Slide Hammer Puller
CG250HL Slide Hammer Puller
CG253 Pressure Screw Puller
CG253H Slide Hammer Puller
CG270 Pressure Screw Puller
CG270H Slide Hammer Puller
CG270S Pressure Screw Puller
CG273 Pressure Screw Puller
CG273H Slide Hammer Puller
CG280 Pressure Screw Puller
CG283 Pressure Screw Puller

VE138-3B Tool Control Board
Panel "B" is designed to hold CG2400 light duty puller set, CJ840C tapped hole puller set, CJ949 bearing separator and CJ9500 bearing separator set components
CG240 Pressure Screw Puller
CG240H Slide Hammer Puller
CG243 Pressure Screw Puller
CG243H Slide Hammer Puller
CJ93B Small Slide Hammer Puller Set
CJ840C Manual Tapped Hole Puller
CJ949 Bearing Separator
CJ950 Bearing Separator
CJ951 Bearing Separator
CJ952 Bearing Separator

VE138-2B Tool Control Board
Panel "C" is designed to hold CG450HYA 20 ton hydraulic bar type puller components and the components of CG2545AB blind hole bearing puller set.
CG40C Blind Hole Bearing Puller
CG45 (1-1 3/4") Puller Set
CG450 Manual Push-Pull Puller
CG450HYA Hydraulic Push-Pull Puller

VE138-1B Tool Control Board
Panel "D" is designed to hold components of CG400 20 ton jaw type puller, three CG305-9 long jaws, CG455 and CG455A threaded adaptor sets, plus CG455-18 and CG455-19 pressure screw adaptors. The adaptors are for use with the bar-type pullers on tool control panel "C."
CG400 Combination Manual Puller
CG400HYA Combination Hydraulic Puller
CG405 Combination Manual Puller
CG450HYA Hydraulic Push-Pull Puller

Features of Two Stage Hydraulic Pumps
- Two stage design will advance 20–50 ton rams in the low pressure stage in less than 1/3 the strokes required on other models
- CG520 Ram extends in 60–70 strokes
- CG420 Ram extends in 17–19 strokes
- When high pressure is required, the low-pressure stage automatically kicks out to leave the high-pressure stage to do the work

CG650

CG420-1A

CG720

CG520

Ram (Cylinder) Specifications

Capacity, tons	Stock No.	Stroke, inches	Collapsed Height, inches	Extended Height, inches	Effective Area (piston)	Oil Capacity, cu in	Pressure Screw Size, inches
4	CG220	2 1/4	6	8 1/4	.966	2.174	1/2-13 x 14 1/4
6	CG650	1 1/2	4 11/16	6 3/16	1.473	2.210	5/8-11 x 13 1/4
10	CG120	1	4 3/4	5 3/4	2.440	2.440	3/4-10 x 16 1/4
20	CG420-1A	2	6	8	4.418	8.836	1 1/8-8 x 20 1/2
35	CG720	2 1/2	7	9 1/2	7.903	19.758	1 3/8-8 x 25
50	CG520	3	8 1/8	11 1/8	11.066	33.198	1 5/8-5 1/2 x 30

CG222 4 Ton Set
Includes:
CG120-3-1 Hose
CG120-4 Coupler Set
CG220 4 Ton Ram
CG220-13 Pressure Screw
CG4-2A 4 to 10 Ton Hyd. Pump

CG652 6 Ton Pump and Ram Set
Includes:
CG120-3-1 Hose
CG120-4 Coupler Set
CG250-20 Replacement Point
CG4-2A 4–10 Ton Hyd. Pump
CG650 6 Ton Ram

CG122 10 Ton Pump and Ram Set
Includes:
CG120 10 Ton Ram
CG120-13 Pressure Screw
CG120-3-1 Hose
CG120-4 Coupler Set
CG270-20 Replacement Point
CG4-2A 4–10 Ton Hyd. Pump

CG420A 20 Ton Set
Includes:
CG420-1-14 Centering Adaptor
CG420-1A 20 Ton Ram
CG420-2A 1 Stage Pump
CG420-3-1 Hose
CG420-4 Coupler Set

CG420A2S 20 Ton Set
Same as CG420A with the CG420-2S two stage pump.

CG4-2A

CG420-2A

CG420-2S

HYDRAULIC ACCESSORIES

CG6223 6 Ton Power Kit
Converts CG250 and CG253 manual pullers to hydraulic power.
Includes:
CG652 6 Ton Pump and Ram Set
CG250-15 2-Jaw Yoke
CG250-16 Hand Wheel Adaptor
CG253-15 3-Jaw Yoke

CG1224

CG420-5C

CG420-6

CG1224 Hydraulic Conversion Kit
Both conversion kits provide hydraulic power for the pullers, which are included in the CG2500B puller sets. 10 ton. Converts CG270, CG273, CG280 and CG283 manual pullers (on Tool Control Panel "A") and CG1700/ CG2500B puller sets to hydraulic power.
CG122 10 Ton Pump and Ram Set
CG270-15 2-Jaw Yoke
CG270-16 Hand Wheel Adaptor
CG273-15 3-Jaw Yoke

CG420-5C Pressure Gauge
Can be used with 6, 10, 20, 35 and 50 ton hydraulic equipment. Use CG4-2A, CG420-2A or CG420A-2S pumps. Indicates hydraulic pressure in tons of pressure as well as PSI. Adaptor CG420-6 is required to attach gauge to pumps.

CG420-6 Gauge Mounting Adaptor
Mounts CG420-5C pressure gauge to 6, 10, 20, 35 and 50 ton hydraulic systems.

⚠WARNING

- Screen the puller application
- Inspect the puller, do not use damaged parts
- Use the proper type and size puller for the job
- Read safety precautions on pages W1 to W4

PULLERS: 2-AND 3-JAW HYDRAULIC

CG654HY

CG655HY

CG274HY

CG277HY

CG400HYA

CG343

CG405HYA

CG425HYA

CG560HY

6 Ton Capacity (5.4 t)

Stock No.	Maximum Reach, inches (mm)	Maximum Spread, inches (mm) inside	Maximum Spread, inches (mm) outside	Pressure Screw Size, inches	Jaw Thickness, inches (mm)	Jaw Width, inches (mm)
CG654HY† Hydraulic, 2 Jaw	3 (76)	1 1/2–3 1/2 (38–89)	4 1/2 (114)	5/8-11 x 13 3/4	1/4 (6)	3/4 (19)
CG655HY*† Hydraulic, 3 Jaw	3 (76)	1 1/2–3 1/2 (38–89)	4 1/2 (114)	5/8-11 x 13 3/4	1/4 (6)	3/4 (19)

†Includes hydraulic ram and pump set.
*To convert to manual power, use pressure screw, adjusting nut and yoke from either CG250 or CG253 Pullers.

10 Ton Capacity (9.1 t)

Stock No.	Maximum Reach, inches (mm)	Maximum Spread, inches (mm) inside	Maximum Spread, inches (mm) outside	Pressure Screw Size, inches	Jaw Thickness, inches (mm)	Jaw Width, inches (mm)
CG274HY† 2 Jaw Model	8 3/4 (222)	3–8 (76–203)	3–8 (76–203), 10 1/2 (266)	3/4-10 x 16 1/4	1/4 (6)	15/16 (24)
CG275HY† 3 Jaw Model	8 3/4 (222)	3–8 (76–203)	10 (254)	3/4-10 x 16 1/4	1/4 (6)	15/16 (24)
CG276HY† 2 Jaw Model	15 (381)	4 3/4–11 1/2 (121–292)	13 3/4 (349)	3/4-10 x 23 3/8	3/8 (9)	1 (25)
CG277HY* 3 Jaw Model	15 (381)	4 3/4–11 1/2 (121–292)	13 3/4 (349)	3/4-10 x 23 3/8	3/8 (9)	1 (25)

†Includes hydraulic ram and pump set.
*To convert to manual power, use pressure screw, adjusting nut and yoke from either CG270 or CG273 Pullers.

20 Ton Capacity (18.1 t) - Combination 2-and 3-Jaw

Stock No.	Maximum Reach, inches (mm)	Maximum Spread, inches (mm) outside	Pressure Screw Size, inches	Jaw Thickness, inches (mm)	Jaw Width, inches (mm)
CG400HYA*	9 1/2 (241)	13 (330)	1 1/8-8 x 20 1/2	7/16 (11)	1 1/4 (32)
CG400HYA2S	CG400HYA with two stage pump				
CG400	CG400HYA less hydraulic ram and pump				
CG343	Manual version of CG400HYA. Includes CG343-1 4" Plug and CG300-1 1-14 Pressure Screw in place of ram and pump				
CG343-1	4" Plug	—	—	—	—
CG300-1	1-14 Pressure Screw	—	1 x 14 x 14 5/8	—	—
CG405HYA*	14 (355)	15 (381)	1 1/8-8 x 20 1/2	9/16 (14)	1 1/4 (32)
CG405HYA2S	CG405HYA with two stage pump				
CG405	CG405HYA less hydraulic ram and pump				
CG348	Manual version of CG405HYA. Includes CG343-1 4" Plug and CG305-8 1-14 Pressure Screw in place of ram and pump				
CG305-8	1-14 Pressure Screw	—	1-14 x 18 3/8	—	—
CG425HYA*	19 (482)	20 (508)	1 1/8-8 x 20 1/2	1 1/8 (29)	1 1/2 (38)
CG425HYA2S	CG425HYA with two stage pump				
CG425	CG425HYA less hydraulic ram and pump				
CG325	Manual version of CG425HYA. Includes 1 3/8-8 x 20 1 1/16" pressure screw in place of pump, ram, washer adaptor, ram adaptor and cap screws				

*Included with hydraulic ram.

50 Ton Capacity (45.36 t) - Combination 2-and 3-Jaw

Stock No.	Maximum Reach, inches (mm)	Maximum Spread, inches (mm) outside	Pressure Screw Size, inches	Jaw Thickness, inches (mm)	Jaw Width, inches (mm)
CG560HY*	28 (711)	44 (1,118)	1 5/8–5 1/2 x 30	1 7/16 (36)	2 (51)
CG560HY2S	CG560HY w/ 2 stage pump				

*Included with hydraulic ram

PULLERS: BAR-TYPE MANUAL TAPPED HOLE SETS

6 Ton Capacity (5.4 t), Tapped Hole

Stock No.	Max. Reach, in. (mm)	Max. Spread, in. (mm)	Pressure Screw Size, inches	Side Rods	Side Rod Adaptors (2 each), inches
CJ840C	33 (838)	2 5/8–11 5/8 (67–295)	1-14 x 33	5/8-18	1/2-20, 1/2-13, 3/4-16, 3/4-10
Complete Puller Set	Side rods in set are provided 2 each in 5" (CJ84-5), 10" (CJ84A2) and 20" (CJ84-3) lengths				3/8-24, 3/8-16, 5/16-24, 5/16-18, 7/16-20, 5/8-18, 5/8-11, 7/16-14
CJ84C	CJ840C less all adaptors and side rods except 5/8-18 x 10.				
Basic Puller Set					1/2-20, 1/2-13, 5/8-18, 5/8-11, 3/4-16, 3/4-10

CJ840C

BAR-TYPE MANUAL PUSH-PULL SETS

6 Ton Capacity (5.4 t), Push/Pull

Stock No.	Max. Reach, in. (mm)	Max. Spread, in. (mm)	Pressure Screw Size, inches	Pressure Screw Adaptor	Side Rods, inches	Side Rod Adaptors, inches
CG706 Push/Pull Set	14 1/8 (358)	2 5/8–7 1/2 (67–191)	5/8-18 x 10	—	7/16-14 x 8 (4 each)	7/16-14f x 5/8-18m

CG706

10 Ton Capacity (9.1 t), Push/Pull

Stock No.	Max. Reach, in. (mm)	Max. Spread, in. (mm)	Pressure Screw Size, inches	Pressure Screw Adaptor	Side Rods, inches
CG710 Push/Pull Set	17 5/8 (448)	3 9/16–9 3/8 (90–238)	3/4-16 x 12	CG710-3 3/4-16f x 5/8-18m	(2) 5/8-18 x 8, (2) 5/8-18 x 12

CG710

BAR-TYPE HYDRAULIC/MANUAL SETS

6 Ton Capacity (5.4 t), Hydraulic

Stock No.	Maximum Reach, inches (mm)	Maximum Spread, inches (mm)	Pressure Screw Size, inches	Pressure Screw Adaptor	Side Rods, inches	Side Rod Adaptors, inches
CG656HY* Hydraulic Set	14 1/8 (358)	2 5/8–7 1/2 (67–191)	5/8-11 x 13 3/4	5/8-11f x 5/8-18m	7/16-14 x 8	7/16-14f x 5/8-18m
CG656	CG656HY Set less the hydraulic components					

*Included with hydraulic ram

10 Ton Capacity (9.1 t), Hydraulic

Stock No.	Maximum Reach, inches (mm)	Maximum Spread, inches (mm)	Pressure Screw Size, inches	Pressure Screw Adaptor	Side Rods, inches	Side Rod Adaptors, inches
CG150HY* Hydraulic Set	17 5/8 (448)	3 9/16–9 3/8 (90–238)	3/4-10 x 16 1/4	3/4-10f x 5/8-18m, 3/4-10f x 3/4-16m	5/8-18 x 8, 5/8-18 x 12	—
CG150	CG150HY Set less the hydraulic components					

*Included with hydraulic ram

CG150HY

20 Ton Capacity (18.1 t), Hydraulic

Stock No.	Maximum Reach, inches (mm)	Maximum Spread, inches (mm)	Pressure Screw Size, inches	Pressure Screw Adaptor	Side Rods, inches	Side Ride Adaptors, inches
CG450HYA Hydraulic Set	24 (610)	6–15 (152–381)	1 1/8-8 x 20 1/2	—	7/8-14 x 20, 7/8-14 x 10	7/8-14f x 7/8-14m, 7/8-14f x 5/8-18m
CG450HYA2S*	CG450HY Set with 2 stage pump					
CG450	CG450HY Set less the hydraulic components					
CG350*	Manually operated version of the CG450					

*Included with hydraulic ram

CG450HYA

35 Ton Capacity (31.7 t), Hydraulic

Stock No.	Maximum Reach, inches (mm)	Maximum Spread, inches (mm)	Pressure Screw Size, inches	Pressure Screw Adaptor	Side Rods, inches	Side Rod Adaptors, inches
CG750HY* Hydraulic Set	26 (660)	8 1/2–17 (216–432)	1 3/8-8 x 25	1 3/8-8f x 7/8-14m	1-14 x 20, 1-14 x 10	1-14f x 7/8-14m, 7/8-14f x 3/4-16m
CG750HY2S	CG750HY Set with 2 stage pump					
CG750	CG750HY Set less the hydraulic components					

*Included with hydraulic ram

⚠WARNING

- Screen the puller application
- Inspect the puller, do not use damaged parts
- Use the proper type and size puller for the job
- Read safety precautions on pages W1 to W4

PULLERS: REFERENCE CHARTS

Jaw-Style Pullers (Hydraulic and Manual)





Stock No.	Hydraulic Unit	Ram Adaptor	Hydraulic Adaptor	Yoke	Pressure Screw	4" Dia. Plug	Plate	Spring	Adj. Stud	Jaws	Side Arms/ Side Plate	Arm Bolts Arm Nuts	Washers/ Cap Screws
CG654HY	CG652	CG250-16	–	CG250-15	*	–	CG250-5	CG250-6	–	CG250-3 (2)	–	–	–
CG655HY	CG652	CG250-16	–	CG253-15	*	–	CG250-5	CG250-6	–	CG250-3 (3)	–	–	–
CG274HY	CG122	CG270-16	–	CG270-15	*	–	CG270-5	CG270-6	–	CG270-3 (2)	–	–	–
CG275HY	CG122	CG270-16	–	CG273-15	*	–	CG273-5	CG270-6	–	CG270-10 (3), CG270-3 (3)	–	–	–
CG276HY	CG122	CG270-16	CG270-14	CG270-15	*	–	CG270-5	CG270-6 (4)	–	CG270-12 (2)	–	–	–
CG277HY	CG122	CG270-16	CG270-14	CG273-15	*	–	CG273-5	CG270-6 (4)	–	CG270-12 (3)	–	–	–
CG400HYA	CG420A	–	–	CG400-2	*	–	CG400-5	CG400-6 (4)	CG400-7 (4)	CG300-3 (3)	–	–	–
CG343	–	–	–	CG400-2	CG300-1	CG343-1	CG400-5	CG400-6 (4)	CG400-7 (4)	CG300-3 (3)	–	–	–
CG405HYA	CG420A	–	–	CG400-2	*	–	CG400-5	CG400-6 (4)	CG400-7 (4)	CG305-9 (3)	–	–	–
CG348	–	–	–	CG400-2	CG305-8	CG343-1	CG400-5	CG400-6 (4)	CG400-7 (4)	CG305-9 (3)	–	–	–
CG425HYA	CG420A	CG425-9	–	CG325-2	*	–	–	–	–	CG325-3 (3)	CG325-4 (3)	CG325-5 (3)	CG425-7
CG325	–	–	–	CG325-2	CG325-1	–	–	–	–	CG325-3 (3)	CG325-4 (3)	CG325-5 (3)	–
CG560HY	See Hyd. Unit Chart	–	–	CG560-2	*	–	–	–	–	CG560-3 (3)	CG560-4 (6)	CG560-5 (9)	–

*Included with hydraulic ram (see chart below).

Bar-Style Pullers (Hydraulic and Manual)

Set Stock No.	Hyd. Unit Ram Adapt.	Yoke	Pressure Screw	Centering Adaptor	Pressure Screw Adaptor	Thrust Nut Thrust Washer	Side Rods (2)	Side Rod Hex Nuts (6)	Clip/ Washer	Side Rod Conn. Nuts (2)	End Blocks (2)	Side Rod Adaptors (2)	Cap Screw (2 ea)
CJ84C	–	CJ84-1B	CJ84-4	CJ84-16	–	–	5/8-18 x 10	–	ME5A16 (2)	–	–	–	–
CG706	–	CG656-2	CG706-1	C250-20	–	CG325-6, CG706-2	CG656-3 (4) (8")	CG656-7	CG656-8 (4)	CG656-6	CG656-6	CG656-12	–
CG710	–	CG150-2	CG710-1	CG270-20	CG710-3	CG45-2, CG710-2	CG150-3 (12"), CG150-4 (8")	–	–	–	CG150-6	–	–
CG656HY	CG654, CG656-9	CG656-2	*	–	CG656-13	–	CG656-3 (8")	CG656-7	CG656-8 (2)	CG656-5	CG656-6	CG656-12	CG656-11, CG656-10
CG656	–	CG656-2	–	–	CG656-13	–	CG656-3 (8")	CG656-7	CG656-8 (2)	CG656-5	CG656-6	CG656-12	CG656-11, CG656-10
CG150HY	CG122, CG150-9	CG150-2	*	*	CG150-12 (5/8"), CG150-13 (3/4")	–	CG150-3 (12"), CG150-4 (8")	–	–	–	CG150-6	–	CG150-11, CG150-10
CG150	–	CG150-2	–	–	CG150-12 (5/8"), CG150-13 (3/4")	–	CG150-3 (12"), CG150-4 (8")	–	–	–	CG150-6	–	CG150-11, CG150-10
CG450HYA	CG420A, CG425-9	CG450-10	*	*	–		CG350-3 (18"), CG350-4 (9")	CG350-7	CG350-8 (2)	CG350-5	CG350-6	CG350-9	CG450-11, CG450-12
CG450	– CG425-9	CG450-10	–	–	–		CG350-3 (18"), CG350-4 (9")	CG350-7	CG350-8 (2)	CG350-5	CG350-6	CG350-9	CG450-11, CG450-12
CG350	CG420A, CG425-9	CG350-2	CG350-1	–	–		CG350-3 (18"), CG350-4 (9")	CG350-7	CG350-8 (2)	CG350-5	CG350-6	CG350-9	CG450-11, CG450-12
CG750HY	See Hyd. Unit Chart	CG750-2	*	*	CG750-11 (7/8"), CG750-13 (7/8")	–	CG750-3 (20"), CG750-4 (10")	CG750-7	CG750-8 (2)	CG750-5	CG750-6	CG750-9, CG750-10	CG750-11, CG750-12
CG750	– CG720-9	CG750-2, CG550-2	–	–	CG750-14 (1 1/8")	–	CG750-3 (20"), CG550-3, CG750-4 (10")	CG750-7, CG550-7	CG750-8 (2)	CG350-5	CG750-6	CG750-9, CG750-10	CG750-11, CG550-10, CG750-12

*Included with hydraulic ram (see chart below).

Hydraulic Power Units



Stock No.	Capacity, tons	Ram	Included with Ram Pressure Screw	Included with Ram Centering Adaptor	Hose	Coupler	Pump	Optional Pressure Gauge	Items* Gauge Adaptor
CG222	4	CG220	CG220-13	–	CG120-3-1	CG120-4	CG4-2A	–	–
CG652	6	CG650	CG650-13	CG250-20	CG120-3-1	CG120-4	CG4-2A	CG420-5C	CG420-6
CG122	10	CG120	CG120-13	CG270-20	CG120-3-1	CG120-4	CG4-2A	CG420-5C	CG420-6
CG420A	20	CG420-1A	CG420-1-13A	CG420-1-14	CG420-3-1	CG420-4	CG420-2A	CG420-5C	CG420-6

*Standard with CG559 Bar-Style Puller Set.

Bearing Separators

- For separating and pulling double bearings and close fitting gears. Use with tapped hole, two-jaw pullers or floor presses



Stock No.	A	B	B	C	D
CJ949	1 11/16	1 1/8	1/4	5/16"–18	2 5/8
CJ950	2 3/8	2 3/8	3/8	3/8"–16	3 3/4
CJ951	4 3/8	4 1/2	5/8	5/8"–18	7 1/4
CJ952	5 7/8	6 1/8	1 1/2	5/8"–18	9 5/16
CJ953	8 3/8	8 3/4	1 1/4	3/4"–16	14 7/16

CJ950

CJ952

Male Adaptors

Stock No.	Female Thread	Male Thread
CG656-12	7/16"-14	5/8"-18
CG656-13	5/8"-11	5/8"-18
CJ84-6	5/8"-18	5/16"-24
CJ84-15	5/8"-18	5/16"-18
CJ84-7	5/8"-18	3/8"-24
CJ84-10	5/8"-18	3/8"-16
CJ84-8	5/8"-18	7/16"-20
CJ84-18	5/8"-18	7/16"-14
CJ84-9	5/8"-18	1/2"-20
CJ84-11	5/8"-18	1/2"-13
CJ84-17	5/8"-18	5/8"-18
CJ84-12	5/8"-18	5/8"-11
CJ84-13	5/8"-18	3/4"-16
CJ84-14	5/8"-18	3/4"-10
CG710-3	3/4"-16	5/8"-18
CG150-12	3/4"-10	5/8"-18
CG150-13	3/4"-10	3/4"-16
CG46-7*	3/4"-10	1"-14
CG46-8**	3/4"-16	1"-14
CG750-9	1"-14	3/4"-16
CG750-10	1"-14	7/8"-14
CG455-18	1 1/8"-8	5/8"-18
CG455-19	1 1/8"-8	7/8"-14
CG47-420	1 1/8"-8	1 1/4"-12
CG550-9	1 3/8"-6	1 3/4"-12
CG455-1	7/8"-14	5/8"-18
CG455-2	7/8"-14	5/8"-11
CG455-3	7/8"-14	3/4"-16
CG455-4	7/8"-14	7/8"-10
CG455-5	7/8"-14	7/8"-9
CG455-6	7/8"-14	1"-14
CG455-7	7/8"-14	1"-8
CG455-8	7/8"-14	1 1/8"-12

*For attaching CG46 Series Pullers to CG105HY Hydraulic Bar-Style Puller.
**For attaching CG46 Series Pullers to CG710 Push/Pull Set.

CG455 Male Adaptor Set
Includes two each of the male adaptors CG455-1 – CG455-8 (16pc).

- Male and female adaptors add versatility to the pulling and pushing capabilities of bar-style pullers
- Adaptors change the diameter and/or thread pitch of pressure screws and side rods to accommodate item being pushed or pulled
- Unthreaded male ends of bull nose adaptors perform many pushing operations

CG455

CG455A

Female Adaptors

Stock No.	Female Thread
CG455-9	7/8"-14 and 5/8"-18
CG455-10	7/8"-14 and 3/4"-16
CG455-11	7/8"-14 and 1"-14
CG455-12	7/8"-14 and 1 1/8"-8
CG455-13	7/8"-14 and 1 1/8"-12
CG455-14	7/8"-14 and 1 1/4"-8
CG455-15	7/8"-14 and 1 1/4"-12
CG455-17	7/8"-14 and 1 1/2"-12
CG455-16	7/8"-14 and 1 1/2"-8

CG455A Female Adaptor Set
Includes two each of the female adaptors (18pc).

⚠WARNING

- Screen the puller application
- Inspect the puller, do not use damaged parts
- Use the proper type and size puller for the job
- Read safety precautions on pages W1 to W4

PULLERS: BLIND HOLE BEARING



These special pullers will pull blind hole bearings, bushings and sleeves with inside diameters ranging from 1/4"–7" where regular pullers will not reach. The operation is simple. After the special collet is inserted through the bearing or sleeve, a matched expanding rod is threaded into the collet and secured. Pulling can be done through bridge of bar type yokes or with side hammers.

CG40CB

CG40CB Blind Hole Bearing Puller
Includes nine collets and yoke. Uses CG250-8A slide screw and CG250-9 slide hammer.

Includes:

CG40-1	CG40-3	CG41-11
CG41-14	CG41-12	CG41-13
CG40-4	CG40-9	CG40-15
CG40A6	CG40A10	CG40-7
CG40-8	CG40-2	

CG2545AB

CG2545AB Blind Hole Bearing Puller
Includes CG40C and CG45 sets plus slide screw and hammers.

Includes:

CG40-1	CG40-2	CG40-3
CG41-11	CG41-14	CG41-12
CG41-13	CG40-4	CG40-9
CG40-15	CG40A6	CG40A10
CG40-7	CG40-8	CG250-8A
CG250-9	CG270-1A	CG45-2
CG270-8A	CG45-15	CG45-3
CG45-4	CG45-6	CG45-7
CG66-2		

CG45

CG45 (1"-1 3/4") Puller Set
Three collets and yoke. Uses CJ105-4B slide screw and CJ97-3A slide hammer.

Includes:

CG270-1A	CG45-4	CG45-6
CG45-2	CG45-15	CG45-7
CG45-3		

CG46

CG46 (1" 5/8-3") Puller Set
Three collets, slide screw and hammer. For large size blind hole bearings, Torrington needle bearings, heavy duty bearings on live center lathes, conveyor belts and rollers.

Includes:

CG46-1	CG46-3	CG46-5
CG46-2	CG46-4	CG46-6

CG47

CG47 (3"-7") Puller Set
Master collet and pads plus slide screw and hammer.
Pulling size is changed by changing pads.

Includes:

CG4567N	CG47-204	CG47-209
CG4567O	CG47-205	CG47-210
CG47-201	CG47-206	CG47-211
CG47-202	CG47-207	CG47-212
CG47-203	CG47-208	

Set Components

Stock No.	Description	Internal Thread Size	External Thread Size
CG40-11	Collet, 43/64"–53/64"	—	—
CG40-12	Collet, 15 mm–18 mm	—	—
CG40-4-1	Collet Extension, 4" long	—	—
CG46-8	Manual Adaptor	—	—
CG46-7	Hydraulic Adaptor	—	—
CG47-420	Hydraulic Adaptor	—	—
CG250-8A	Slide Screw, 5/8"-18 UNF x 18 9/16"	—	—
CG250-9	Slide Hammer, 2 lb	—	—
CG40-1	Pressure Screw, 5/8"-18 x 7 3/4"	—	—
CG40-2	Nut, 15/16" Wrench Size	—	—
CG40-3	Yoke, 3 1/4" Spread	—	—
CG41-11	Expanding Rod	5/8-18	3/8-24
CG41-14	Collet, 1/4"–5/16"	—	—
CG41-12	Collet, 5/16"–3/8"	—	—
CG41-13	Collet, 3/8"–7/16"	—	—
CG40-4	Expanding Rod	5/8-18	1/2-20
CG40-9	Collet, 7/16"–1/2"	—	—
CG40-15	Collet, 1/2"–5/8"	—	—
CG40A6	Collet, 5/8"–3/4"	—	—
CG40-7	Collet, 3/4"–7/8"	—	—
CG40-8	Collet, 7/8"–1"	—	—
CG40A10	Collet, 1"–1 1/8"	—	—
CJ105-4B	Slide Screw, 3/4"-16 x 22 1/2"	—	—
CJ97-3A	Slide Hammer, 3 3/4 lb	—	—
CG270-1A	Pressure Screw, 3/4"-16 x 9 1/2"	—	—
CG45-2	Nut, 1 1/8" Wrench Size	—	—
CG45-3	Yoke, 5 3/4" Spread	—	—
CG45-4	Expanding Rod for:	3/4-16	5/8-18
CG45-15	Collet, 1"–1 1/4"	—	—
CG45-6	Collet, 1 1/4"–1 1/2"	—	—
CG45-7	Collet, 1 1/2"–1 3/4"	—	—
CG46-1	Slide Screw, 1"-14 x 18"	—	—
CG46-2	Slide Hammer, 6 lb	—	—
CG46-3	Expanding Rod	1-14	1 1/8-12
CG46-4	Collet, 1 5/8"–2"	—	—
CG46-5	Collet, 2"–2 1/2"	—	—
CG46-6	Collet, 2 1/2"–3"	—	—
CG4567N	Slide Screw, 1 1/4"-12 x 24"	—	—
CG4567O	Slide Hammer, 10 lb	—	—
CG47-201	Expanding Rod for:	1 1/4-12	1 1/8-12
CG47-202	Master Collet	—	—
CG47-203	Collet Pad, 3"–3 1/2" (3)	—	—
CG47-204	Collet Pad, 3 1/2"–4" (3)	—	—
CG47-205	Collet Pad, 4"–4 1/2" (3)	—	—
CG47-206	Collet Pad, 3 1/2"–5" (3)	—	—
CG47-207	Collet Pad, 5"–5 1/2" (3)	—	—
CG47-208	Collet Pad, 5 1/2"–6" (3)	—	—
CG47-209	Collet Pad, 6"–6 1/2" (3)	—	—
CG47-210	Collet Pad, 6 1/2"–7" (3)	—	—
CG47-211	Screw, 3/4" (3 sets of 2)	—	—
CG47-212	Screw, 1 3/4" (3 sets of 2)	—	—

Accessories

CG40-11 (43/64"–53/64") Collet
For needle bearings on Leece-Neville® alternators. Use with CG40-4 expanding rod.

CG40-12 (15 mm–18 mm) Collet
For pilot bearings on late model Ford® transmissions. Use with CG40-4 expanding rod.

CG40-4-1 (4" long) Collet Extension
For CG40 series collets.

CG46-8 Manual Adaptor
For attaching CG46 series pullers to CG710 push/pull set.

CG46-7 Hydraulic Adaptor
For attaching CG46 series pullers to CG105HY hydraulic bar style puller.

CG47-420 Hydraulic Adaptor
For attaching CG47 series pullers to CG450HYA hydraulic bar style puller.

CG46-3 Expanding Rod

Tools Required for Cummins® B and C Series Service Kits

Stock No.	Description	Applications				Set Contents	
		12 Valve	24 Valve			CUMDS12V	CUMDS24V
		pre-1994	1994–1998 1/2	1999–2002	2003	12 Valve	24 Valve
FB300A	Bent Blade Feeler Gauge	•	•	•	•	•	•
EEPD500	Compression Gauge	•	•	•	•	•	•
MB5D	Bronze Injector Brush	•	•	•	•	•	•
MB6BTA	Stainless Steel Injector Brush	•	•	•	•	•	•
YA9565A	Engine Turnover Tool	•	•	•	•	•	•
CJ140-1	Injector Slide Hammer Puller	•	•	•		•	•
CJ142	14 mm Injector Adaptor	•				•	
FRHM17	17 mm 6-Point Crowfoot	•				•	
FRXM17	17 mm 6-Point Flare Nut Socket	•				•	
M3584	Compression Adaptor	•				•	
SP144	Injection Pump Wrench	•				•	
SP145	Idle Wrench (10 mm)	•				•	
TSM24	24 mm 6-point Deep Socket	•				•	
FRHM19	19 mm 6-Point Crowfoot		•	•	•		•
FRXM19	19 mm 6-Point Flare Nut Socket		•	•	•		•
EEPV313C	Compression Adaptor		•	•	•		•
CJ143	Adaptor		•	•			•
CJ144	Adaptor		•	•			•
SP504	Gear Puller		•	•			•
CJ148	Fuel Line Plug			•	•		•
CJ149	Adaptor				•		•
TB40	Tote Bag					•	•

CUMDS12V

CUMDS24V

TB40

Optional Tools

EEDMTACH1	Digital Tachometer to measure engine rpm	•	•	•	•		
TWM14A	14 mm 1/2" dr Shallow Socket use with V22A to adjust valves	•					
SP346	Fan Wrench (36 mm)	•					

CUMDS12V 12 Valve Diesel Set for *Cummins* B and C Series
- Services *Cummins* B and C Series 12 valve engines from pre-1994
- Additional applications include Dodge® Ram® 250 and 350 pickups, Ford® pickups with 3.9 L, 5.9 L and 8.3 L diesel engines, J.I. Case® tractors and off road equipment
- 14 tools in tote bag

CUMDS24V 24 Valve Diesel Set for *Cummins* B and C Series
- Services *Cummins* B and C Series 12 and 24 valve engines 1994 and later
- Additional uses include *Dodge* heavy duty pickups and all applications with ISB and ISC diesel engines
- 14 tools in tote bag

SP500

Diesel Timing Gauge Set (Blue-Point®)

SP500 Diesel Timing Gauge Set
- The SP500 diesel gauge set will update existing 2017DSP diesel service sets to handle 1994–1998 *Cummins* "B" engines used in *Dodge Ram* 250/350 pickup trucks and some *Ford* trucks
- Updated 2017DSP set will also service *J.I. Case* tractors and off road equipment

SP503 Spline Socket (*Blue-Point*)
- Used to remove and replace the delivery valve on most Bosch® fuel injection pumps
- Wrench size is 34-tooth
- 1/2" drive size

SP503

SP504 Gear Puller (*Blue-Point*)
- Used to remove the injection pump gear
- Bolt thread is M8 x 1.25
- Bolt length is 44 mm

SP5001 Dial Indicator (*Blue-Point*)
- Features rack and pinion construction
- Refer to the pump manufacturer's service manual when using this gauge
- Gauge diameter is 2 1/4"
- Range is 30 mm
- Gauge is marked in .01 mm increments

SP5002 Gauge Holder (*Blue-Point*)
- Used in fuel injection pump in place of the #1 delivery valve to locate the base circle of the injection pump cam
- Male thread is M22 x 1.5

SP504

SP5002

WARNING

- Screen the puller application
- Inspect the puller, do not use damaged parts
- Use the proper type and size puller for the job
- Read safety precautions on pages W1 to W4

DIESEL: SERVICE TOOLS FOR CUMMINS® ENGINES

CG80HYA

CG80A

Wet Sleeve Pullers

CG80HYA Hydraulic Wet Sleeve Puller
- Provides hydraulic pressure for removing wet sleeves on *Cummins* diesels, trucks and heavy construction and farm equipment with a cylinder diameter of 3"–6"
- Reach of 7"–12"
- Adjustable bridge fits around studs in block
- Includes a 6 ton hydraulic power pack
- Contains one set each of CG80-110-22

CG80A Wet Sleeve Puller
Manual version of CG80HYA.

CG80-11 Insert (1/4")
For CG80A/CG80HYA Wet Sleeve Pullers.

CG80-22 Insert (5/16")
For CG80A/CG80HYA Wet Sleeve Pullers.

CJ83C

M1324

Pulley Installers and Pullers

CJ83C Pulley and Gear Puller
Ideal for servicing crankshaft pulleys, gears and timing gears on a wide range of gasoline and diesel engines including *Cummins* accessory drives and water pumps. Includes two each 3/8"-16 x 3", 5/16"-18 x 2 1/2" and M10-1.5 x 65 mm bolts. Nominal capacity is 3 1/2 tons.

Includes:

CJ86-1 Yoke
CJ83-3 Pressure Screw
CJ66-15-3 Centering Point
ME5A54 Washer (1 needed)
ME5A55 Washer
ME3A45 Studs (2)
ME3A44 Studs (2)
ME3A75 Studs (2)

M1324 Pulley Installer
For installing the accessory drive pulley on the shaft. Includes 7/8"-14 NC threaded adaptor, washer type bearing and installer housing.

PPM516A

SIML200

FTXEL45E

SIMML242

Engine Sockets

PPM516A Drain Plug Socket
1/2" square male end with 1/2" drive. Extra strength to remove drain plugs. 1 7/16" long.

SIML200 6-Point Extra Deep Impact Socket
5/8" single hex for the stud used for the rocker box on engines equipped with Jacobs® engine brake. 1/2" drive, 5" long.

FTXEL45E Extra Long TORX® Socket Driver
Quickly and easily access intake bolts on *Cummins* N14 diesel engines without removing the air pump. Can also be used on older *Cummins* NH Big Cam four diesel engines. 3/8" square drive.

SIMML242 6-Point Metric Extra Deep Impact Socket
- For removing and installing the head bolts on *Cummins* ISX engines

ST669

Torque Adaptor Set

ST669 Torque Adaptor Set
Use to loosen and adjust lock nuts to manufacturing specifications.

ST669-1 Handle Assembly
Handle assembly.

M1302B18 12-Point Deep Socket
9/16" deep, 12-point socket.

M1302B24 12-Point Deep Socket
3/4" deep, 12-point socket.

M1302A5 Screwdriver
1/2" x .062 screwdriver.

TM82 Flat Tip Socket Driver
1/4" x .036 flat tip driver.

M3540C

M3584

M3585

Compression Adaptors

These compression adaptors are for use with the EEPD500 compression gauge.

M3540C Compression Adaptor
For *Cummins* 855 cu in NH and 903 V8 and L10 diesel engines.

M3584 Compression Adaptor
For Case®/*Cummins* series "B" 2.9 L, 3.9 L and 5.9 L diesel engines.

M3585 Compression Adaptor
For *Case/Cummins* series "C" 8.3 L engines.

MB5D

MB6BTA

BNH1

Injector Brushes (Blue-Point®)

MB5D Injector Brush (*Blue-Point*)
Bronze, non-abrasive brush cleans carbon from injector tips.

MB6BTA Injector Brush
Stainless steel wire brush cleans the injector cavity in the cylinder head. For *Cummins* B series engines and *J.I. Case* equipment. 9" long.

BNH1 Injector Brush
For *Cummins* NH series engines.

Fuel Line Tools

CJ148 Fuel Line Plug
For plugging fuel lines.

CJ149 Fuel Tube Remover
For fuel inlet tubes on later model vehicles.

YA6615 Flare Nut Wrench (Blue-Point®)
- Use on Dodge® trucks with 5.9 L engines (2003 and later) and 6.7 L engines (2007 and later)
- Easily slides into the confined area of the cylinder head
- Wrench is required to hold the 24 mm flare nut while the 19 mm fuel line coupler is loosened
- Helps prevent costly damage to the fuel lines

Injector Pullers

CJ125A Injector Puller
- Slide hammer puller services "D," "Top Stop," and small V8 injectors. 10 1/2" long

CJ140 Diesel Injector Puller Set
- Use on fuel injectors in *Cummins* "B" and "C" Series 3.9 L, 5.9 L and 8.3 L engines used in Dodge® pickups and Case® tractors/off-road equipment. Will service all 1994–1998-1/2 standard injectors as well as fuel inlet tubes

CJ140-1 Slide Hammer (8 mm)
- Use to pull injectors from heads on 1998-1/2–2002 *Dodge/Cummins*. 8 mm x 1.25 thread. Use CJ144 Puller to put the fuel inlet tube prior to removing the injector

CJ141 Diesel Injector Puller Adaptor (12 mm)
- Use on *Cummins* diesel injectors prior to 1994

CJ142 Diesel Injector Puller Adaptor
- Use on *Cummins* diesel injectors from 1994–1998-1/2. M14 X 1.5 threads

CJ143 Diesel Injector Puller (8 mm)
- Use on 1998-1/2 *Cummins* diesel injectors in tight access areas

CJ144 Diesel Injector Puller (15 mm)
- Use on 1998-1/2–2002 *Cummins* diesel fuel inlet tubes

Injector Pump/Idle Lock Nut Wrench *(Blue-Point)*

SP144 Injection Pump Wrench
13 mm, 12-point box wrench is used to service the injection pump mounting bolts found on 5.9 L *Cummins* engines.

SP145 Idle Lock Nut Wrench
- 10 mm, 12-point wrench with 90° angle is designed to remove or install mounting bolts on the diesel injection pump
- For *Cummins* B Series 5.9 L engines

Air Compressor/Fuel Pump Wrenches

M1328A Air Compressor/Fuel Pump Wrench
Includes 5/8", 12-point box wrench on one end for servicing fuel pumps and a specially designed 11/16" open end for access to air compressor bolts.

M1321 Air Compressor/Fuel Pump Wrench
- Similar to M1328A but has a 12-point box wrench on both ends
- Accommodates air compressor and fuel pump flange bolts on NH Series Inline 6 cylinder engines

M1329 Fuel Pump Wrench
- Includes 7/16", 12-point box end for servicing fuel pump bolts on NH series engines equipped with *Cummins* air compressors
- 6 5/8" long

Valve Adjusting Wrenches

M1322 Valve Adjusting Wrench
- 3/4", 12-point box wrench to tighten lock nuts on rocker arms
- Designed to clear the aftercooler
- 14 3/4" long

M1319 Valve Adjusting Wrench
- 7/8", 12-point box wrench to tighten lock nuts on rocker arms
- Designed to clear the aftercooler
- 12" long

Fan Wrench (Blue-Point®)

SP346 Fan Wrench
- 36 mm open end wrench services fan clutch attaching bolts on B Series *Cummins* engines
- Can also be used on fan clutch bolts on Navistar® 6.9 L and 7.3 L engines
- Wrench is 15" long and has a blue, vinyl covered handle

Engine Turning Tool

YA9565A Engine Turning Tool
- Used to rotate the engine for making valve and injection pump adjustments on *Cummins*® and *J.I. Case* 3.9 L, 5.9 L and 8.3 L "B" and "C" Series engines
- 3/8" square drive

DIESEL TOOLS

FDT1116

Fuel Line Disconnect Tools

- This set includes a total of four fuel line disconnect tools:
  –a straight and a 90° angle (for 11.8 mm fuel lines)
  –a straight and a 90° angle (for 16 mm fuel lines)
- The OEM tool sets ZTSE4773 and ZTSE4772 do not include the straight tools – the straight tools allow access into tight areas
- All four tool handles are highly visible orange for easy identification

FDT11 Angled Fuel Disconnect Tool
- 90° angle for 11.8 mm fuel lines

FDT11STR Straight Fuel Disconnect Tool
- For 11.8 mm fuel lines

FDT16 Angled Fuel Disconnect Tool
- 90° angle for 16 mm fuel lines

FDT16STR Straight Fuel Disconnect Tool
- For 16 mm fuel lines

FDT1116 Fuel Line Disconnect Tool Set
Set includes FDT11, FDT11STR, FDT16 and FDT16STR (four-piece)

SP7882

Injector Height Gauges (Blue-Point®)

- Use height gauges to set injectors during installation and at set service intervals
- Knurled handle screws into gauge at 90° angle for work in close quarters

Stock No.	Size	Series	Engine	Year
SP7882-782	78.2 mm	60/60 and 50	DDECI/DDECII	1986–1993/1986–1993
SP7882-788	78.8 mm	60 and 50	DDECIII	1994–1997
SP7882-803	80.3 mm	60/60 and 50	DDECIII/DDECIV	Late 1997/1997–1998
SP7882-810	81.0 mm	60 and 50	DDECIV/Marine	1998–1999/2000–2003
SP7882-821	82.1 mm	60	See service manual	See service manual

SP7882 Diesel Injector Height Gauge Set
- Five-in-one gauge set covers all applications for Detroit Diesel® 50 and 60 series engines
- Includes SP7882-782, SP7882-788, SP7882-803, SP7882-810 and SP7882-821 injector gauges plus SP7882-handle in vinyl storage pouch

M3530

M3531

Governor Gap Wrenches

M3530 Governor Gap Adjusting Wrench
- 3/8" open ends, 4" long
- Special thin design with 30° and 60° angle heads

M3531 Governor Gap Lock Nut Wrench
Similar to M3530 but has 7/16" open ends and is 4 1/4" long.

M3525A

M3503B

S6200

MFIMMD10

Special Application Sockets

Stock No.	Size, mm	Finish	Style	A	B	D	E
MFIMMD10	10	Industral Finish	12-point	15.1	17.2	28.6	7.1

M3525A Spanner Socket
- 1/2" drive, 3 7/32" long
- Includes 1 1/8" internal hex for use on "Fuel Squeezer" series of engines

M3503B Fuel Line Nut Socket
- 1/2" wrench opening. Six-point, 3/8" drive
- Shaped for access to fuel line nuts. 3 1/4" long
- Additional applications on the head temperature sensor found on Buell® Motorcycles

S6200 Engine Bearing Cap Bolt Socket
- Use to service engine cam bearing cap bolts on both older and newer generation Detroit Diesel® engines. Newer generation *Detroit Diesel* engines use longer cam bolts than earlier generation engines. The S6200 is specially designed to work on both engine generations. 12 mm wrench size. 1/2" drive. 4 3/8" overall length

MFIMMD10 12-Point Metric Shallow Magnetic Socket
- For use on *Detroit Diesel* 60 series, the MFIMMD10 is used on the three camshaft gear thrust plate bolts located inside the camshaft gear cover within the front gear case on the engine
- The mechanic has to go through the cover to start the bolts
- If one is dropped, it is very labor intensive and time consuming to retrieve
- Applies to 2002 and later 60 series *Detroit Diesel* engines with the compact gear case
- Please note: Earlier engines with the tall gear case have 13 mm six-point bolts
- Please MFIMM13 for this application

FCT706

Fan Clutch Wrench (Blue-Point®)

FCT706 Fan Clutch Wrench
- Fan clutch wrench for heavy duty truck engines
- Hole pattern on tool aligns with fasteners on fan hub
- Use with open end wrench to remove fan clutch. 24 1/2" length for maximum leverage

Applications: International® (VT365, T444E, DT466, DT350 and HT530), Ford® Power Stroke® (7.6 L and 6.0 L), *Detroit Diesel* (Series 40) and John Deere® engines.

BDD1

Injector Brush

BDD1 Injector Brush
Stainless-steel wire brush is for cleaning carbon buildup in the injector cup

FB325A

FB308D

FB328A

M3517B

M3518

AWM4D

Feeler Gauges *(Blue-Point)*

FB325A U.S./Metric Feeler Gauge Set
- For adjusting governor gap
- Includes (25) 1/2 x 3" blades in sizes .0015" plus .002 to .025" in .001" increments

FB308D Step Feeler Gauge Set and Holder
- For adjusting valves
- Includes 12-step blades in sizes .008"/.010"–.028"/.030"

FB328A Step Feeler Gauge Set and Holder
- For adjusting valves
- Includes 2-step blades: .011"/.013" and .013"/.015"

Push Rod Wrenches

M3517B Push Rod Lock Nut Wrench
1/2" open end, 102° offset handle.

M3518 Push Rod Adjusting Wrench
5/16" open end, 102° offset handle.

Metric Hex Wrenches

AWM4D Metric L-Shape Hex Wrench
For adjusting governor gap 4 mm hex

AWM5D Metric L-Shape Hex Wrench
For adjusting governor gap 5 mm hex

⚠WARNING

- Do not use "cheater bars" on handles
- Read safety precautions on pages W1 to W4

DIESEL: FORD®/NAVISTAR®

Belt Tensioning Tool (Blue-Point®)

SRD6

SRD6 Belt Tensioner Release Tool
- 6" long adaptor with 1/2" male square
- The female triple square drive allows the user more flexibility to work around obstacles by coming in at different angles
- With a 1/2" breaker bar
- Similar to Snap-on® 6" torque adaptors but with a male square
- If using with a torque wrench, please refer to *Snap-on* part #SS306G Torque Chart for formula to obtain the correct applied torque

Heavy Duty Applications:
- For serpentine belt tensioners with a 1/2" square drive opening found on Series 60 Detroit Diesel® and Caterpillar® engines
- Other heavy duty applications include buses and delivery vans where the doghouse or engine shrouding can get in the way and make the work area very tight

Automotive Applications:
- 1/2" serpentine belt tensioners on Dodge®/Chrysler® vehicles (2.0 L and 3.0 L engines)
- *Ford* vehicles
- Lincoln® and Mercury® vehicles (2.3 L, 3.0 L, 4.2 L and 4.6 L engines)
- GM® vehicles (2.5 L, 4.7 L, 5.0 L and 5.7 L engines)

YA9340

YA9340 Serpentine Belt Wrench
- Use to release any serpentine belt tensioner with 1/2" square drive opening
- Ratcheting action allows better positioning of the tool, which allows more swing angle than a solid type serpentine belt wrench
- Reversible ratchet head is only 1" thick so it will fit between tensioner face and fan blades on S Series 60 *Detroit Diesel* and some *Caterpillar* engines
- Also great for working on buses and delivery vans where the doghouse or engine shrouding restrict access
- Compact overall length keeps handle from coming in contact with radiator hoses, charged air cooler pipes, hydraulic lines or frame rails
- Vinyl grip for comfort
- 13" overall length

Compression Adaptor

M3545B

M3545B Glow Plug Compression Adaptor
- For *GM* 4.3 L and 5.7 L plus *Navistar* 6.9 L and 7.3 L diesel engines
- Replacement valve core is M3545A4
- Must be used in conjunction with MT33C Compression Gauge and M3569 or M3570 Quick Couplers

M3545A4 Replacement Valve Core
Replaces valve core on M3545B.

Sensor and Filter Sockets

S6196KR

S6196KR Sensor Socket for *Ford* ICP
- Easily remove and install the ICP Sensor on 2002 and 2003 *Ford* 6.0 L diesel truck engines
- Spring retention securely holds sensor during use
- Six-point configuration with Flank Drive® wrenching system
- Wrench Size: 1 1/16". Drive Size: 3/8"
- O.D.: 1 7/16" (36.2 mm). Length: 2 9/16" (64.8 mm)

Glow Plug Tool

FGPT

FGPT Glow Plug Harness Tool
- Prevents damage to harness and connector rail
- Removes and installs glow plug connectors
- Orange color for easy identification in dark engine compartments

Fuel Filter Wrench *(Blue-Point)*

FFW2

FFW2 Dual Fuel Filter and Oil Filter Cap Socket
- Dual Purpose 36 mm hex and six notches allows the tool to work as both a fuel filter and oil cap socket
- 3/8" drive

Diesel Pulse Adaptor

MT257B Diesel Pulse Adaptor
- Test injector timing or engine RPM on diesel engines equipped with 1/4" or 6 mm external steel fuel injector lines
- Enables use with inductive pick up timing light to test engine timing
- MT257B is not for use on diesels with common rail fuel systems

MT257B

Quick Couplers

M3569A Quick Coupler
45° offset

M3570A Quick Coupler
90° offset

M3569A

M3570A

Injector Brushes

MB5D Injector Brush (Blue-Point®)
Bronze, non-abrasive brush cleans carbon from injector tips.

MB73A Injector Brush *(Blue-Point)*
Combination 5/16" and 13/16" diameter stainless steel wire brush to clean the injector bore and injector tip hole in the cylinder head.

MB5D

MB73A

Diesel Turbo Tools

PSWT10K Power Stroke Diesel Turbo Wrench for *Ford*
- 10 mm wrench is ideal for accessing the turbo mounting bolts located between the firewall and the turbo with exhaust intake in the way
- Designed for use on 2003 and later 6 L diesel Power Stroke® engines used on *Ford* F250, F350, E250 and E350
- Additional applications on *Navistar* VT365 engines and some International 4000 series of medium duty trucks
- Wrench has a zero degree offset six-point head
- Designed to remove excessively tight fasteners off the intake when removing turbocharger where a conventional 15˚ offset wrench will not work
- 5 1/2" long

PSWT10K

S6210 Diesel Turbo Inlet Pipe Socket for *Ford* Vehicles
Application: To access bolts holding the turbo inlet pipes to the turbo on 6.4 L diesel engines. There are six bolts with restricted access between the turbo and firewall. Removal of the two bolts below the EGR OC pipe is especially difficult without a 10 mm pipe socket.

S6210

TAP1225 Turbo Vane Actuator Puller
- Specially designed for *Ford* 6.4 L turbo diesel to save the technician time
- Compact size fits on or off the truck
- Self-aligning for easy install
- Remove the actuator link rod from the arm on the turbo of 2008–2010 *Ford* 6.4 L *Power Stroke* diesel engines

TAP1225

Pulley Puller

SP448 Pulley Puller
- For removing the air pump pulley. Fits over pulley flange.

SP448

⚠WARNING
- Do not use "cheater bars" on handles
- Read safety precautions on pages W1 to W4

DIESEL: FORD®/NAVISTAR®

YA1140-1

YA1140-21

S6340E

Fuel Injector Sockets

- Complies with *Ford* TSB 11-10-10
- 12-point, 17 mm crowfoot design allows socket to slip onto the injector easily at any angle
- Design allows you to spin the socket under bent fuel lines
- Nose geometry reduces electrical connection damage
- The depth stop keeps the socket at the specified height
- Thick mass reduces flex and flare nut damage
- Design allows for clearance to torque the fitting without a torque adaptor

YA1140-1 Long Diesel Injector Crowfoot Socket

- *Ford* 6.7 L Power Stroke® Diesel
- The in-line design of the YA1140-1 allows accurate torquing of the injector and clears the plastic housing and fuel return line

YA1140-21 Offset Diesel Injector Crowfoot Socket

- *Ford* 6.7 L *Power Stroke* Diesel
- The design of the YA1140-21 allows it to rotate under the fuel line while the depth stop keeps it at the specified height to clear the plastic housing

YA1140 Diesel Injector Crowfoot Socket Set

Set includes YA1140-1 and YA1140-21 (two-piece)

Injector Hold Down Fastener Tools

S6340E TORX® Bit Socket

- Perfect length of 3 1/8" is ideal for removing and reassembly of *Ford Power Stroke* 6.0 L diesel injectors
- A regular length T40 bit socket is too short and a long T40 bit socket is too long when used with a ratchet or torque wrench and will not fit the application

AUTOMOTIVE DIESEL

SWR3

S3624

A129

OFSKIT

Sensor and Filter Sockets

SWR3 Water Sensor Socket

- Easily remove/replace water sensor without damage when changing the fuel filter on 2001–present GM® 6.6 L DuraMax® diesel engines
- GM 6.6 L *DuraMax* diesel engine applications include 2001–present Chevy®/GMC® pickups and *Chevy/GMC* medium duty trucks
- Manufactured from high strength, chemical-resistant glass filled nylon. 3/8" square drive
- NOTE: Due to possible sensor distortion from previous incorrect removal/installation methods, the sensor may slip in the SWR3 during removal. Use to reinstall the sensor, when proper hand tightening is used

S3624 Filter Flip Socket

- One tool will remove/install all three filter caps on *Ford* 6.0 L *Power Stroke* diesel powered vehicles such as Super Duty Series Pickups, Econoline Vans and Excursions
- Use for removal and installation of the oil filter cap plus primary and secondary fuel filter caps on these vehicles
- Not for impact use
- Requires optional 3/8" drive extension (FX1 or FXWP1 11/2" long).

Additional 24 mm Applications

- Buick® vehicles: VVT-V6 Rendezvous Ultra, LaCrosse CSX
- Cadillac® vehicles: VVT-V6 CTS, STS, SRX
- Saturn® vehicles: L-3000 V6

Additional 35/36 mm Applications

- Audi®/Volkswagen®: VR6 engine
- BMW®: 6, 8 and 12 cylinder engines
- Mercedes-Benz®: diesel engines
- Mini-Cooper® engines or vehicles
- Volvo®: 40 and 50 series, XC90 with 3.2 L six-cylinder engine

S3624 Specifications

- Square Drive Size: 3/8"
- Wrench Sizes: 24 mm and 35 mm/36mm
- Wrenching Configuration: Flank Drive®
- OD Major: 1.80" (45.7 mm)
- OD Minor: 1.38" (34.9 mm)
- Length: 1.73" (43.9 mm)
- Finish: Nickel/Chrome

A129 Diesel Fuel Filter Socket

- Use for removing and installing fuel filter housings found on 2002 and later Dodge® Ram® trucks with the 24 valve Cummins® diesel engine
- 11/8" wrench size. 3/8" drive

OFSKIT Oil/Fuel Filter Socket Set

- Includes: A127 and A106 oil filter sockets, S3624 filter flip socket and A129 fuel filter socket for *Cummins* Diesel (four-piece) in storage tray

Fan Clutch Wrench (Blue-Point®)

YA6180 Fan Clutch Wrench
- Use on GM® and Ford® diesel and gas engines with a 48 mm fan clutch nut
- Provides the extra leverage needed to remove the fan clutch nut
- Overall length of 20 1/8"
- Head width of 4 1/8"
- Head thickness of 3/8"

YA6180

Injector Pullers

IPK1170 Injector Puller Kit
- Injector Puller Kit for *GM* LB7 Duramax® Engines
- Pulls injector straight
- Pulls far enough to completely remove a stuck injector
- Saves time by reducing the likelihood of loosening the sleeves (up to 1/2 hour per sleeve)
- Removes sleeve from injector without damage

IPK1170

IPK1220 Injector Puller kit
- Removes diesel injectors on VW® and Audi® vehicles from 2000–present
- The correct tools all in one kit – no searching for shop tools
- Kit contains three adaptors with 2 lb slide weight on a 10" slide shaft
- Kit includes newest style adaptor that will keep this kit current for the next ten-plus years

IPK1220

Metric Injector Sockets

S6128 Metric Injector Socket
- For Bosch® type injectors on *GM* 6.2 L 6.5 L diesel engines
- 30 mm, six-point. 2 1/16" bolt clearance. 7/16" opening depth, 2 11/16" long
- 7/8" external hex on drive end

S6104B Metric Injector Socket
- For diesel engines in *VW* and Mercedes® vehicles
- 27 mm, 12-point
- Clearance bored to fit over fuel injector
- 1/2" drive. 3 1/4" long

S6128

S6104B

Flywheel Lock *(Blue-Point)*

YA6925 Flywheel Lock for *GM Duramax* 6.6 Liter Engines
- Works on 2001 and later 6.6 L *Duramax* diesel truck engines
- Saves time by not removing the starter motor
- Holds the engine in place for high torque requirements
- Handle is visible to remind the technician that the engine is locked

YA6925

Turbo Vane Socket

TVS1240 Turbo Vane Socket
- Split socket made from alloy steel and designed with additional strength
- Correct geometry to reduce the possibility of damaging the sensor
- Fits the confined location between the cold and hot sides of the turbo

TVS1240

⚠WARNING

- Do not use chrome or industrial finish hand tools with impact drivers
- Read safety precautions on pages W1 to W4

DIESEL FUEL SERVICE

EEDF400 Diesel EGR and Induction Cleaning System
- The performance of clean diesel engines using cooled EGR and common rail injection can be adversely affected by soot and fuel deposits
- The EEDF400 System safely cleans the Diesel EGR circuit, coolers, intake, injectors, turbo charger and fuel system
- Converts cleaner into foam to better penetrate hard carbon
- Increases Cetane and enhances fuel atomization for more complete combustion
- Lowers emissions, smooths rough idle, improves fuel economy and performance
- Technical Support: 1-877-776-8486

EEDF400

Stock No.	Fluid Capacity	Input Pressure Min.	Hose Length	Operating Temperature Range	Dimensions	Shipping Weight, lb
EEDF400	64 oz	60 PSI	7.5 feet	40 °–120 °F	16.5"L x 10.5"W x 11.75"H	10.8

EEDF400-1

EEDF400-2

EEDF400-3

EEDF400-4

EEDF400-5

EEDF400-6

EEDF400-7

EEDF400-8

EEDF400-9

EEDF400-10

EEDF400-11

EEDF400-12

Optional Accessories

EEDF400-1 EGR Cleaning Adaptor
- EGR adaptor for Ford® 6.0 L engines

EEDF400-2 EGR Cleaning Adaptor
- EGR Adaptor for *Ford* 6.4 L Engines

EEDF400-3 EGR Cleaning Adaptor
- EGR Adaptor for Duramax® Engines

EEDF400-4 EGR Cleaning Adaptor
- EGR Adaptor for Mercedes®/Universal Engines

EEDF400-5 EGR Cleaning Adaptor
- EGR Adaptor for *Duramax* Turbo Boost Engines

EEDF400-6 EGR Cleaning Adaptor
- EGR Adaptor for Cummins® Manual Opener Engines

EEDF400-7 EGR Cleaning Adaptor
- EGR Adaptor for *Cummins* Engines (2007–2010)

EEDF400-8 EGR Cleaning Adaptor
- EGR Adaptor for Izusu®/BMW®/*Mercedes* Engines

EEDF400-9 EGR Cleaning Adaptor
- EGR Adaptor for *Mercedes* Sprinter® Engines

EEFD400-10 EGR S-Tool
- EGR S-Tool

EEFD400-11 EGR Cleaning Adaptor
- EGR Adaptor for *Ford* 6.7 L Engines

EEFD400-12 EGR Cleaning Adaptor
- EGR Adaptor for Audi®/VW® Engines (M14 x 1.5)

EEDF400-EGR Diesel EGR and Induction Cleaner
- Diesel EGR and Induction Cleaner for the EEDF400. Case of (12) 32 oz bottles

EEDF400-INJ Diesel Fuel Injector Cleaner
- Diesel Fuel Injector Cleaner for the EEDF400. Case of (12) 12 oz bottles

EEDF400-EGR

EEDF400-INJ

⚠WARNING

- Injector cleaner is flammable, avoid flames and sparks
- Read and follow all instructions
- Wear appropriate gloves and clothing
- Read safety precautions on pages W1 to W4

S6160

S6194

S6190A

S6260

SHR20

Hand Sockets

S6160 Extra Long Head Bolt Socket
- Use on 1986 and later Nissan® engines with 12 mm head bolts
- 8" length reaches past cam and rocker assembly to service head bolts
- Thin profile socket and shank will reach through access hole and past overhead camshaft
- Additional high torque applications include removal and installation of universal joint flange bolts on Ford®/Mercury® cars such as Mustang, Crown Victoria® and Lincoln®, plus *Ford* Explorer, Ranger and F150/F250 trucks
- 12-point, industrial finish, 1/2" sq drive

S6194 Head Bolt Socket
- Use on Toyota® and *Nissan* cars and trucks and Honda® cars with 12 mm head bolts
- 4 1/8" length reaches past cam and rocker assembly to service head bolts
- Thin-profile socket and shank reach through the access hole and past overhead camshaft
- Additional high torque applications include removal and installation of universal joint flange bolts on *Ford* Explorer, Ranger and F150/F250 trucks
- 12-point, industrial finish, 1/2" sq drive

S6190A IPR Sensor Socket for *Ford* vehicles
- *Ford* 6.0 L diesel injection pressure regulator (IPR) socket
- Use on 1994 and later *Ford* 6.0 L diesel trucks plus International® CT365, 530E and 466F
- Similar to Rotunda® part number 303-1112

S6260 Heavy Duty Spicer Drive Socket
- For removal of heavy duty spicer drive shaft bolts that have 1/2" fasteners found on Kenworth®, Peterbilt® trucks and many other heavy duty applications
- 8" long, 12-point, industrial finish, 1/2" sq drive

SHR20 Oil Galley Drain Plug Socket
- For removing and installing oil galley drain plug on Caterpillar® 6 cylinder engines
- Galley plugs may leak and need to be removed so a new O-ring can be installed
- Low-profile design to get into tight applications
- Special alloy steel provides corrosion resistance
- 5/8" Hex Socket, six-point, 1 1/4" long

S6197

S6199

S6217

SIMDM212

DW402C

S6216

SIML302

S6230

Impact Sockets

S6197 Heavy Duty Driveline Socket
- Use on *Kenworth/Peterbuilt* heavy duty drivelines that use 1/2" fasteners
- Many other heavy duty 1/2" applications as well
- Example: Socket will clear the weld yoke, when removing the cap screws holding the wing bushings to the end yoke. 1/2" wrench size, 12-point, 1/2" drive, 4 1/8" long

S6199 U-bolt Impact Socket
- Most semi trucks use many 5/8" diameter U-bolts for springs and other suspension components
- Saves you time as you do not need to cut off the excess thread compared to using a standard 1 1/8" deep socket that is 3/4" drive
- Up to 2" longer than a standard deep socket to easily accommodate the excess thread length
- 1 1/8" wrench size, six-point, 3/4" drive, 5" long

S6217 Head Bolt Impact Socket
- For head bolts on heavy duty trucks and buses with Mercedes® engine MBE900
- Clearance on certain Detroit Diesel® head bolts with the *Mercedes* engine MBE900 require a thin walled socket
- Height of socket helps the technician when using a torque wrench due to the length of torque wrench handle for clearance
- 17 mm, 3/4" drive, 12-point, 4 3/4" long

SIMDM212 12-Point Metric Deep Impact Socket

Application: Flywheel bolts on Cummins® ISX engines.

DW402C Dayton Lug Nut Impact Socket
- 3/4" square drive with a 1 1/4", six-point wrench opening
- Use with socket retainers

S6216 *Detroit Diesel* Engines Head Bolt Impact Socket
- For head bolts on *Detroit Diesel* 50 and 60 Series engines
- Tight clearances between some head bolts and the cylinder head casting require a thin walled socket; these engines are found in truck, bus, motor home, marine and heavy equipment
- The increased height of the socket allows for clearance between the drive tool (ratchet, breaker bar or torque wrench) and installed valve train components, allowing technicians access to head bolts from either side of the engine
- 16 mm, 3/4" drive, 12-point, 4" long

SIML302 6-Point Impact Socket–5 5/8" long
- Head bolts are sunk in pretty deep and the current method is a large impact socket with an extension to reach the application
- In this scenario, you lose too much power with an extension and 3/4" impact gun for the torque required on this application

S6230 Impact Socket, 15/16"–6" long
- Designed for Autocar® and CCC® style dump trucks and garbage trucks that use the 30/36 spring brake chamber made by MGM® brakes
- When doing an emergency repair on the road or changing the diaphragm
- Length of the S6230 is designed to accommodate the very long threaded spring brake release stud assembly (release tool) in the brake chamber

⚠WARNING
- Injector cleaner is flammable, avoid flames and sparks
- Read and follow all instructions
- Wear appropriate gloves and clothing
- Read safety precautions on pages W1 to W4

HEAVY DUTY TRUCK SERVICE TOOLS

IPRD20

S6220

IMFDL242

S6213

S6224

SIMML180

S6314

SIM462TW

IMSLE242A

S6624

SIMM182

S6221

Impact Sockets

IPRD20 Low-Profile Swivel Impact Socket, 5/8"
- Use on starter bolts on Cummins®, Caterpillar®, Detroit Diesel® and International® engines where housing is in the way when backing out the fastener using a standard length impact socket
- 30° uninterrupted swivel action, means greater accessibility in tight quarters, which allows easier and faster removal of stubborn fasteners thus saving time

S6220 C15 Impact Socket for *Caterpillar* Engines
- Use on *Caterpillar* C15 engine rocker stud bolts where the length of socket and broach depth of the socket are critical for the application
- 11/16", six-point, 1/2" drive configuration, 3 1/4" long

IMFDL242 Deep Thin Wall Impact Socket
- Designed to remove the head bolts on *Caterpillar* C12, C15, C16 and 3406Es where the front two and back two head bolts are positioned under the valve covers
- Clearance on certain *Caterpillar* head bolts requires a thin walled socket that needs to be a certain length
- Additional applications include *Detroit Diesel* main bearing cap bolts and 19 mm head bolts on Mercedes-Benz® MBE904/MBE906 EGR engines (2007 and later)
- 3/4" wrench size, 3/4" drive, 5 3/4" long

S6213 U-Joint Strap Bolt Socket
- Use for removal of 13 mm U-Joint strap bolts found on Volvo®, Mack® and other heavy duty applications. 13 mm, 12-point, 1/2" drive, 8" long

S6224 30/30 Air Brake Chamber Socket
- Extra-long design allows quick and safe removal of long threaded brake release stud assemblies
- Flank Drive® wrenching system where the socket grips the fastener on the flanks/flats increasing torque by 15%–20%
- Impact sockets are heat treated to a lower hardness to add impact resistance and ductility

SIMML180 6-Point Metric Extra Deep Impact Socket
- Remove and install the fuel tank hold down strap on *International* 4400 chassis. The fuel tank must be removed to replace the fuel sending unit
- 5" long to reach through the frame to access the fastener without the need of an extension

S6314 Extra-Long Impact Socket
- Manufactured from special alloy steel, precision forged and heat treated for optimum strength and durability
- *Flank Drive* grips fastener on the flanks/flats, increasing torque by 15%–20% prevents fastener from rounding and increases the life of the socket
- Socket overall length is 3 1/4"

SIM462TW Deep Impact Socket
- Designed to remove the lug nuts from *Caterpillar* Model 793 mining trucks
- The 72 lug nuts on each wheel are spaced only 6 mm away from each other and the thin wall design of this socket accommodates easy removal
- *Flank Drive* wrenching system grips the fastener on the flanks/flats, which delivers 15%–20% more turning power

IMSLE242A Inverted TORX® Impact Socket
- For removing and installing head bolts on MaxxForce® 11 and 13 engines found on D15 *International* Trucks from 2010–current
- Used for installation of shear type E24 bolts during alignment of suspensions on Hendrickson® and Dayton® trailers
- Manufactured from special alloy steel, precision forged and heat treated for optimum strength and durability

S6624 Main Cap Bolt Socket
- For removing and installing the main cap bolts on 2007 and later DD13 and 15 *Detroit Diesel* engines
- Overall length (5 3/4") and square drive (3/4") of this socket is critical due to the torque rating for this application
- Manufactured from special alloy steel, precision forged and heat treated for optimum strength and durability
- *Flank Drive* wrenching system grips fastener on the flanks/flats, increasing torque by 15%–20%, prevents fastener from rounding and increases the life of the socket

SIMM182 6-Point Metric Deep Impact Socket
- For removing and installing the head bolts on VT365 *International* engines found in many delivery vehicles

S6221 Fuel Injector Adaptor Impact Socket
- For removing and installing the fuel injector adaptor from the high pressure rail and service the O-rings on Navistar® DT466/570, HT570 (DT9 and 10) engines
- Similar to the *Navistar* OEM tool part number ZTSE4725
- 1 1/16" Hex, 1/2" drive

IM382CD 6-Point Metric Shallow Impact Socket
- Assault Breacher Vehicle
- Utility Truck (Tamen: D00347K)
- Abrams M-1 Tank
- Bridge Launcher Carrier
- M1A2 Heavy Assault Bridge (hab)/Wolverine, 5420-01-430-4227
- Armored Vehicle Launch Bridge (M60A1 & M48A5)
- Combat Tank, Ft, 120 mm gun (M1A1)
- 30 mm, 3/4" drive



Hose Clamp Sockets

Drive Size, inches	Stock No.	mm	A	B	C	D	Set Contains: 204FIHC
7/16	FIHC140	7/16"	21/32"	11/16"	2 1/4"	2 3/4"	•
3/8	FIHC160	1/2"	3/4"	3/4"	—	2 3/4"	•
3/8	FIHCM8	8 mm	12.9 mm	17.2 mm	57.1 mm	69.8 mm	•
3/8	FIHCM10	10 mm	15.9 mm	17.2 mm	57.1 mm	69.8 mm	•

Set shown includes storage tray

204FIHC

Torque Adaptors

SRDM624 Torque Adaptor
- Services the rear brake caliper mounting bracket assembly on 2007 Ford® F450/550 trucks
- Tool fits between the bracket bolt and frame to allow the use of a torque wrench to properly torque the bracket bolts
- 24 mm, 6" long, 12-point wrench design, 1/2" square drive

SRDM624

SRD35 Diesel Head Bolt Torque Adaptor
- Special tool for use on *Ford* F250/F350 Trucks and Excursion® vehicles (2003–2007) plus *Ford* E-Series Vans (2004–2009) including ambulance, law enforcement and shuttle bus conversions using the 6.0 L Power Stroke® diesel engine
- When coupled with an SM18, 18 mm socket, the SRD35 can access all of the head bolts eliminating the need to change tools or remove the adaptor during the job
- Use of 3/4" drive ratchet/torque wrench transmits the high torque necessary to loosen and tighten head bolts, with less strain on the technician
- Eliminates the need to remove the truck/van cab from the chassis to access the rear head bolts, saving time and preventing damage to the rear heat shield
- Eliminates the need to remove the evaporator housing, saving two hours of time and the additional cost of refrigerant added during air conditioning recharging
- Center to center length: 3 1/2"
- Overall length of 4 7/8"

SRD35

Slack and Valve Adjusters

BSA916 Slack Adjuster Wrench
- For brake service and slack adjuster installation on heavy duty trucks equipped with Bendix® automatic slack adjusters
- Use to turn the manual adjuster hex
- Extra deep 9/16" hex allows reach to recessed adjusters
- 14 1/2" overall length helps to overcome the anti reverse mechanism
- Turn over to reverse
- Includes protective vinyl boot

BSA916

HSA716 Slack Adjuster Wrench
- For brake service and slack adjuster installation on heavy duty trucks equipped with Haldex® automatic slack adjusters
- Use to turn the manual adjuster hex
- Extra deep 7/16" hex allows reach to recessed adjusters
- 14 5/8" overall length helps to overcome the anti reverse mechanism
- Turn over to reverse
- Includes protective vinyl boot

HSA716

S6205 Valve Adjuster Socket
- See through window in its 14 mm socket to see the position of the 5 mm hex blade
- Faster valve adjustment time
- Sized for low clearance
- Soft grip handle

Applications: 2002 and later Mercedes® "900" series diesel engines. 2002 and later trucks and buses.

S6205

S6206 Valve Adjuster Socket
- See-through window in its 17 mm socket to see the position of the 6 mm hex blade
- Faster valve adjustment time
- Sized for low clearance
- Soft grip handle

Applications: 2002 and later *Mercedes* "4000" series diesel engines. 2002 and later trucks and buses.

S6206

⚠WARNING
- Do not use "cheater bars" on handles
- Read safety precautions on pages W1 to W4

MOTORCYCLE SERVICE TOOLS

Hand Sockets

Stock No.	Drive Size, inches	External Hex, (mm)	Outer Dia., inches (mm)	Hex Depth, inches (mm)	Length, inches (mm)
HXD22	1/2	22	0.94 (23.8)	0.70 (17.8)	1.50 (38.1)
HXD24	1/2	24	1.03 (26.2)	0.70 (17.8)	1.50 (38.1)

HXD22

HXD22 Motorcycle Wheel Socket
- Essential for removing motorcycle front wheels
- Use torque wrench for axle torque specs
- Use breaker bar to remove difficult fasteners

Applications: 2002 and later Kawasaki® motorcycles (ZX7R, ZRX1200, ZX12R and ZS6); 2002 and later Honda® motorcycle (CBR954RR); 2002 and later Triumph® motorcycle (955i)

HXD24

HXD24 Motorcycle Wheel Socket
- Essential for removing motorcycle front wheels
- Use torque wrench for axle torque specs
- Use breaker bar to remove difficult fasteners

Applications: Suzuki® motorcycles (1300GSXR and 1000GSXR); Hayabusa® motorcycles (various models)

S9724RHS

S9724RHS Low-Profile Spark Plug Socket
- Low-profile socket easily reaches 5/8" (16 mm) spark plugs on muscle cars, ATVs, motorcycles and boats without interference from custom exhausts or chassis
- Spark plug extends through the socket for access in tight quarters
- Patented tapered hex design retains spark plug securely without rubber insert or magnet
- Spark plug is easily disengaged from socket by applying side pressure
- Use ratcheting box wrench on 5/8" external hex drive
- 1 1/16" length

Applications:
Harley-Davidson® motorcycles with large gas tanks (1986 and later Sportster® and 1999 and later twin cam models) plus small block Chevy®, Ford® and Mopar® vehicles and other engines with 5/8" (16 mm) spark plugs and racing exhaust headers

S9704RHS

S9704RHS Low-Profile Spark Plug Socket
- Low-profile socket easily reaches 13/16" spark plugs on muscle cars, ATVs, motorcycles, RVs and boats without interference from custom exhausts or chassis
- Spark plug extends through the socket for access in tight quarters
- Tapered hex design retains spark plug securely without rubber insert or magnet
- Spark plug is easily disengaged from socket by applying side pressure
- Use with open end or ratcheting box wrench on 13/16" external hex drive
- 1 1/4" length

Applications:
Small or big bloc*k Chevy, Ford* and *Mopar* vehicles and other engines with 13/16" spark plugs and racing exhaust headers

SAM12LE

SAM12LE Long Hex Socket Driver

Applications: Essential for removal or installation of bolt found on the lower forks of 2006 and newer *Harley-Davidson* Dyna series. Used when servicing the internal parts of the fork.

Adjusting Tools

HD6529

HD6529 Ratcheting Hex Wrench
- Reversible ratchet lever conveniently located for one-hand operation
- 3/16" hex bit is easily replaced if damaged
- Low-profile design for extra clearance between frame and engine
- Comfortable rubber grip will not scratch chrome
- 9 3/4" overall length for additional reach
- 1/4" hex drive, 3/16" hex bit for *Harley-Davidson* Evolution® motor rocker box cover bolts

NBAT1

NBAT1 Neck Bearing Adjustment Tool
- For neck bearing adjustment on *Harley-Davidson* motorcycles
- Easily maneuvers between the triple clamp and frame
- Fits into the star adjustment nut, allowing technician to adjust the neck bearing play
- Tapered end allows easy access to the neck bearing adjusting star
- Screwdriver-style handle offers a comfortable grip
- 18 1/2" overall length
- Neck bearing adjustment is usually checked at the following service intervals: 1,000, 5,000, 15,000 and 25,000 miles or annually

HFTLRT

HFTLRT Fuel Tank Lock Ring Tool *Harley-Davidson*
- Remove/install the lock ring on 2008 and later FL touring series
- Allows access to the fuel filter and pump as the lock ring is connected to the pump

Motorcycle Oil Fillers

OFHARLEY Motorcycle Oil Filler for Harley-Davidson®
- Prevents any unwanted mess; fastens and seals onto filler neck
- No need to hold funnel while pouring in oil
- Can fill funnel with almost one quart of oil and work on something else
- ABS plastic
- Smooth surface so not to scratch painted surface
- For *Harley Davidson* Touring bikes and Dyna series motorcycles 2007–present

Additional KIA® Applications: Forte® (2013–current), Rio® (2013–current), Soul® (2013–current), Sorento® (2011–current), *Sorento* (2011–current), Sportage® (2014)

OFHARLEY

OFHD Motorcycle Oil Filler for *Harley-Davidson*
- Allows access to the fuel filter and pump as the lock ring is connected to the pump
- Competitive products are metal and can scratch the painted surface of the motorcycle
- Oil filler for 1999–2006 *Harley-Davidson* Touring Motorcycles with the "Push-in Style" oil caps
- Prevents any unwanted mess; fastens and seals onto filler neck
- No need to hold funnel while pouring in oil
- Can fill funnel with almost one quart of oil and work on something else
- ABS plastic
- Smooth surface will not scratch painted surface

OFHD

Tire Spreader

TSP813 Motorcycle Tire Spreader
- Permits one-person installation of tubed tires on motorcycles, ATVs, small farm equipment and industrial equipment
- Easily access valve stem hole when installing difficult 90° valve stems on tubed tires
- Overall length is 23"

TSP813

Fuel Tank Cover

KAC1224TCA Motorcycle Gas Tank Cover
- Fits *Harley-Davidson* Dyna, Softail and Touring models
- Fits various models of Yamaha®, Victory®, Triumph® and Kawasaki® motorcycles plus many more
- Non-marring cover uses a non-abrasive inner liner that will not slide off

KAC1224TCA

Service Set

CYCLESET Motorcycle Tool Set
- 33pc kit services most US manufactured motorcycles
- From battery service, cable and clutch adjustments, to gas tank and seat removal, this set covers roadside maintenance and emergency repairs
- Conveniently organized and stored in a gas tank shape bag measuring 10"L, 5 1/2"W, and 2 1/4"H and is small enough to fit almost anywhere
- Visit www.snapon.com for the full list of set components and applications

CYCLESET

⚠WARNING

- Do not use "cheater bars" on handles
- Do not use chrome or industrial finish hand tools with impact drivers
- Read safety precautions on pages W1 to W4

MOTORCYCLE SERVICE TOOLS

CPT110A

GF22

YA173B

VT1A

GA599A

SGSR104AR

MT125A

AWHD8K

TA358

General Service Tools

CPT110A Drain Plug Socket
- 17 mm, six-point socket is for VW® transmission drain plugs
- Use on *VW* transmission drain plugs
- Additional applications include removing front wheels on Triumph® Daytona® and America® motorcycles
- 3/8" drive, 1" long

A15A Drag **Link Socket**
- Applications include usage on the engine oil drain plug and rear differential drain plug on Kawasaki® UN1500, UN1600 and UN2000 motorcycles

GF22 Drag Link Socket
- Applications include use on the engine oil fill cap on *Kawasaki* UN1500, UN1600 and UN2000 motorcycles

YA173B Clip on Style Angled Air Chuck (Blue-Point®)
- 1/4"-18 female NPT
- Spring loaded, trigger operated valve stem clip
- Maximum operating pressure is 200 PSI

VT1A Valve Stem Inserter
- Simplify installation of valve stem in tubeless tire rim
- Notched shank to accommodate various rim styles
- Comfortable screwdriver type handle

GA599A Tread Depth Gauge
- Measures to a depth of 1" in 1/32" increments
- Plastic body with aluminum probe and sliding gauge
- Includes pocket clip

SGSR104AR Seal Remover Set
- For use on transmissions, heater and vacuum hoses, oil pump drive shaft seals, injectors and fuel rail O-rings, inner tie rod rack boot and CV boot removal, fork seals and caliper dust boot assemblies on Harley-Davidson® and other motorcycles and steering racks and pumps

MT125A Self Powered Timing Light
- Self powered timing light features a single 6' inductive pick up
- Quick attachment to spark plug wires on motorcycles, marine motors, snowmobiles, jet skis, small engines and other equipment that do not have easy access to a battery power source
- Can be used for automotive applications as well
- On/Off switch is located within thumb reach

AWHD8K Hex/TORX® Set
Includes two *TORX* sizes (T27, T40) and six hex sizes (5/32", 3/16", 7/32", 1/4", 5/16" and 3/8"). Fits a wide range of *Harley-Davidson* motorcycles.

TA358 Torque Angle Gauge
- Determines angle controlled torque tightening
- Allows user to follow manufacturer's specifications
- Use on automotive, diesel and industrial equipment plus head bolts and rod bolts on motorcycles
- 3/8" square drive

EEPV503

EEWB333A

EEWH310B

YA1715

Motorcycle Service Equipment

EEPV503 Motorcycle Compression Gauge Set
- Test motorcycles and recreational vehicles with hard-to-access spark plug ports
- Gauge assembly includes 2 3/4" diameter gauge and 18" flexible hose with quick coupler
- Includes EEPV5G10L, EEPV5G12L and EEPV5G14L

EEPV5G10L Compression Gauge Adaptor
- Long reach (M10 x 1.0 pitch)
- Thread length .70"

EEWB333A Motorcycle Wheel Balancer
- Quickly, easily and accurately balance motorcycle tire and wheel assemblies

EEWH310B Motorcycle Tire Changer
- Configured to change tires on most motorcycle wheels
- Raised clamping jaws to allow for hub clearance
- Optional safety restraint arm provides additional tire/wheel retention when seating beads

YA1715 Motorcycle Jack *(Blue-Point)*
- 1,500 lb capacity
- Low height of 4 1/2", maximum height of 14 3/4"
- Double rubber lined pad provides extra protection to motorcycle
- Pull handle assists user to maneuver jack into position
- 1' operation for ease of use
- Safety straps to secure motorcycle

Motorcycle Special Application

MTPV1000 Peak Voltage Tester (Blue-Point®)

Features

- Tester automatically selects the best range for taking a measurement on V DC, V AC and ohms
- Use AC/DC voltage ranges to check ignition coil primary, ignition pulse generator, exciter coil and battery
- Add adaptors to measure temperature, RPM, pressure and amps
- Measure ohms to determine resistance of a coil or spark plug
- Use the continuity buzzer for finding breaks or shorts in wires
- Large, easy-to-read 4,000-count LCD and bar graph to easily view rapidly changing input signals
- Lock readings on display with data hold
- View + or - spark readings with the push of a button
- Measure peak voltage of ignition coil and secondary spark
- Input connector for kV probe
- Auto power off to conserve battery power when not in use
- Includes test instrument, test lead set with alligator clips, protective rubber boot, kV probe, soft carrying case, 9V battery and instruction manual

MTPV1000

Applications

- Peak voltage measurement of secondary ignition systems on all types of vehicles and pleasure craft
- CDI ignition diagnosis on motorcycles, ATVs and snowmobiles
- Digital multimeter functions to measure battery, sensor and circuit voltage
- Check continuity of wiring and resistance of ignition wires

Optional Accessories

- 0–400 AC/DC A clamp-on probe (EETA501C)
- 0–1,000 AC/DC A clamp-on probe (EETA502C)
- Boot Hook Hanger (EEDM503B1)
- K-type temperature adaptor (EEDM506B)
- Heavy duty surface probe for EEDM506B (EETH502B)
- Heavy duty gas probe for EEDM506B (EETH503B)

Wire Twisters

Cushion throat wire twisters feature a polyurethane filler that is bonded into the tool's cutter head to help prevent flying wire bits. A special undercut design helps maintain cutting edges and increases tool durability. Ideal for assembly line applications.

RWTP6

RWTP9

GA311C

PR311

WT11B

WTR1A

WTS6

Wire Twister/Cutters

Stock No.	Description/Features	Wire Capacity, inches	Overall Length, inches	Wire Retainer
RWTP6	Reversible Wire Twister/Cutters	.020–.041	8 1/2	No
RWTP9	Reversible Wire Twister/Cutters	.020–.051	10 1/2	No
GA311C	Wide range of applications	.060	10 1/2	No
PR311	Similar to GA311C, but not spring loaded. Right hand only with manual return.	.060	10 1/2	No
WT11B	Small size for use in tight quarters	.041	8 1/2	No
WTR1A	Reversible wire twisters let you perform right and left hand twist with the same tool. Spring return and control knob.	.041	8 3/4	No
WTRW6A	Reversible wire twisters let you perform right and left hand twist with the same tool. Spring return and control knob. Oval cushioned throat captures and holds wire firmly.	.041	8 3/4	Yes
WTS6	Reversible wire twisters with spring return and control knob. Viton® cushioned throat captures and holds wire firmly. Slim design provides accessibility and utilizes twist rod of 11" tool in 8 3/4" body to provide more twists per pull.	.041	8 3/4	Yes

WARNING

- Read and follow all safety messages and instructions
- Read safety precautions on pages W1 to W4

AVIATION: SAFETY WIRING

WT105-2004

WT105-2516

Safety Wire

Stock No.	Wire Size, inches	Approximate Wire Length, ft	Container
WT105-2004	.020	230	1/4 lb Spool
WT105-3204	.032	90	1/4 lb Spool
WT105-4204	.041	55	1/4 lb Spool
WT105-2016	.020	937	1 lb Canister
WT105-2516	.025	599	1 lb Canister
WT105-3216	.032	366	1 lb Canister
WT105-4116	.041	223	1 lb Canister
WT105-5116	.051	—	1 lb Canister

Meets NASM20995 and MS20995C specifications plus conforms to ASTM580 Materials S30400

AVIATION: MASTIC REMOVAL TOOLS

NYZ701810

NYZ701410

NYZ700510

NYZ700110

NYZ701110

NYZ701210

NYZ7010FSB

NYROC® Blades

Blade Size, inches	Description	Pack of 10	Pack of 200
1/8 wide	General Use	NYZ701810	NYZ701810
1/8 wide	General Use	NYZ7018200	NYZ7018200
1/4 wide	General Use	NYZ701410	NYZ701410
1/4 wide	General Use	NYZ7014200	NYZ7014200
1/2 wide	General Use	NYZ700510	NYZ700510
1/2 wide	General Use	NYZ7005200	NYZ7005200
3/4 wide	General Use	NYZ703410	NYZ703410
3/4 wide	General Use	NYZ7034200	NYZ7034200
1 wide	General Use	NYZ700110	NYZ700110
1 wide	General Use	NYZ7001200	NYZ7001200
1 wide	Button Head Rivet	NYZ701110	NYZ701110
1 wide	Button Head Rivet	NYZ7011200	NYZ7011200
1 1/2 wide	Highlock for 3/8 high locks	NYZ701210	NYZ701210
1 1/2 wide	Highlock for 3/8 high locks	NYZ7012200	NYZ7012200

Blades available in ten-pack and 200-pack quantities only.

NYZ7010FSB Flexible Steel Blade
Use with NYZ7026EH Rubber Handle.

NYZ7000MDKIT

NYZ7007HD

Complete Kits

NYZ7000MDKIT Master Mastic Removal Kit
- Saves most of the time and labor involved to remove PRC and other mastics from every area of an aircraft without damage to the substrate
- Speed controllable vibration gun permits infinitely variable job performance
- Included pneumatic blade sharpener rapidly puts an edge on all *NYROC* blades up to 1" width right at the job site
- Completely portable system is fully grounded and anti-static
- Kit includes medium duty Vibro gun, pneumatic blade sharpener, (one) anti-static vacuum bag, (one) sharpening disc, (one) manual handle, (two) 1" *NYROC* blades, (two) 1/2" *NYROC* blades, (two) 1/4" *NYROC* blades, blade locks and connecting hoses in padded storage case

NYZ7007HD Manual Mastic Removal Kit
- Hand kit is ideal for aviation, automotive and industrial use, especially for delicate jobs and limited access scraping applications
- *NYROC* blades are sharpened with sandpaper, small stone or optional pneumatic sharpener
- Kit includes (six) 1" *NYROC* blades, (six) 1/2" *NYROC* blades, (three) 1/4" *NYROC* blades and ergonomic rubber handle

Blade Sharpener

NYZ7000S Pneumatic Blade Sharpener
- Pneumatic powered sharpener quickly sharpens all NYROC® blades up to 1" W
- Consistently sharpens blades to the optimal 51° angle
- Operates with single push button
- Connects directly to shop air
- Removed material is collected in disposable anti-static vacuum bag attached directly to the discharge chute

NYZ7000S

NYZ7026EH

Accessories

NYZ7026EH *NYROC* Blade Holder
- Vulcanized rubber padded blade holder, works exclusively with *NYROC* blades
- Fits comfortably in the users hand, reduces operator fatigue and helps to prevent injury

NYZ7004VB Anti-Static Vacuum Bags
- Anti-static vacuum bags for NYZ7000S blade sharpener
- Pack of 10

NYZ700AD Abrasive Sharpening Discs
- Abrasive sharpening discs for NYZ7000S blade sharpener
- Pack of ten

NYZ7025H50

NYZ7006MG

Guns and Hoses

NYZ7025H50 Air Hose (Anti-Static)
- NONSTAT® anti-static 1/4" hose is fully grounded to prevent static discharge
- Hose is ideal for environments and projects where static control is essential
- 50' long

NYZ7024H100 Air Hose (Anti-Static)
- Same as NYZ7025H50 except 100' long

NYZ7006MG Vibro Gun Kit
- Kit includes medium duty Vibro gun, 1", 1/2" and 1/4" *NYROC* blades (one ea.) plus blade locks in black kit bag
- Medium duty Vibro gun adds pneumatic power to all scraping jobs using standard *NYROC* blades

AVPW716

AFPW38

Aircraft Vacuum/Fuel Pump Wrenches

AVPW716 Aircraft Vacuum Pump Wrench
- Removes and replaces vacuum pump flange nuts on aviation and experimental aircraft
- Use with any 1/4" drive extension
- Easily fits into tight areas between the pump and nearby accessories
- Cut down head design adds greater flexibility than a wrench with a bent shank

Applications Include: Cessna®: Skyhawk®, Skylane®, Stationair Piper®: Cub®, Warrior®, Archer®, Seminole, Aztec, Navaho, Chieftain Mooney®: M20 series, M200 series, Ovation, Acclaim Beechcraft®: Bonanza®, Duchess, Baron Cirrus®: SR20 and SR22 aircraft

AFPW38 Aircraft Fuel Pump Wrench
- Small crowfoot which will remove and install the fuel primer/injector line on Continental® and Lycoming® engines
- Can be used with a 1/4" drive extension and will easily fit into tight areas

AOFW2

AOCO1

Aircraft Oil Filter Wrench

AOFW2 Aviation Oil Filter Wrench
- Oil filter wrench can be used for installing and removing oil filters on all standard general aviation aircraft with 1" hex oil filters
- Compact size allows for reach in restricted areas
- 3/8" drive torque wrench
- Please refer to Snap-on® SS306G Torque Chart for formula to obtain the correct applied torque

AOCO1 FOD Oil Can Opener
- Testing by Saybolt® laboratory proves this can opener eliminates a cause of FOD, eliminating costly downtime and repairs
- Using a screwdriver to open an oil can may leave metal debris in the oil, causing FOD to turbines
- Can opener is made of reinforced high-quality plastic designed to open a quart can of oil
- Durable, ergonomic, nonslip design is pocket size and can be attached to a key ring

WARNING
• Read and follow all safety messages and instructions
• Read safety precautions on pages W1 to W4

AVIATION: SPECIALTY SERVICE TOOLS

LGSW125

Aircraft Landing Gear Wrench

LGSW125 Landing Gear Socket Wrench
- Used to remove and replace the landing gear harness thru bolt on Embraer® 190 aircraft
- 1 1/4" deep well socket with 1/4" slit cut into it allows the speed cable to pass through
- 3/8" square drive allows torque wrench to torque the nut to 80 in-lb
- Flex head and overall length is 11.5"

IMTSX29

Fan Bolt Impact Socket

IMTSX29 External MORTORQ® Impact Socket
- Use on fan bolts found on Rolls Royce® engines used on Airbus® A380 jets

AHCS1

Hose Clamp Socket

AHCS1 Aircraft Hose Clamp Socket
- Use on hose clamps found on Lycoming®, TCM (Continental®) and other engines found on Cessna®, Piper® and Beechcraft® aircraft
- Slotted socket is for removing and installing the three different size thumb knobs found on aircraft hose clamp
- Competitive sockets only work on one size and have a rubber O-ring that can cause an FOD issue
- Manufactured from special alloy steel, precision forged and heat treated for optimum strength and durability
- 1/4" square drive

FRESL24

Low Profile, inches (3/8" drive)

- Saves time by avoiding clearance issues when working on propeller assemblies
- Works on *Lycoming* and *Continental* engines used in *Piper*, *Cessna* and Mooney® aircraft



	Stock No.	Working Torque, in-lb	A	B	C	D	E
3/4	FRESL24	465	1 5/64	3/4	7/16	3/16	2
7/8	FRESL28	605	1 1/4	3/4	7/16	3/16	2

N8323



Deep Throw Speeder

Stock No.	A	B	C	D
N8323	1/2	18 1/16	8 1/2	32 7/8

ASME®/ANSI® B107.10

N8323 Deep Throw Speeder
- Deep throw speeder wrench
- This "loading tool" is used on F-14A aircraft

87CFCT

388CFCT

Cushion Throat Cutters

- Quality forged steel ensures tools that will provide years of service
- Differential heat treatment produces the strength and toughness in desired areas to withstand repeated tough cutting jobs
- Handles are designed for comfort and to deliver leverage needed to tackle demanding jobs
- Cushion throat secures wire clippings to avoid contamination of work environment



Stock No.	Handle Style (A)	Jaw Length, inches (B)	Length, inches (C)
86CFCT	Bowed	3/4	6 5/16
87CFCT	Bowed	13/16	7 3/8
388CFCT	Bowed	1 1/16	8 5/16

ACP8

Electrical Connector Pliers

ACP8 Robo Connector Plier
- Self-adjusting electrical connector pliers with non-marring jaws make accessibility to confined areas much easier
- Range of 1/4"–15/8"
- 8" long

Hi-Lok® Fastener Ratchets

- Features a hole through the head and square drive so the fastener may be held steady with a hex wrench as the fastener's collar is tightened
- Sealed head keeps dirt and other contaminants out of the head mechanism
- For use with standard or *Hi-Lok* sockets



TFY72

TY72

FCY72

Stock No.	Square Drive, inches	Gear Teeth	Swing Arc	A	B	C	Repair Kit
TFY72	1/4	72	5°	7/16	15/16	6 1/4	RKRTY72
TY72	1/4	72	5°	7/16	15/16	4 5/8	RKRTY72
FCY72	3/8	72	5°	7/16	15/16	4 5/8	RKRFCY72

Generator Engine Sockets

- Socket is used in the oil and gas industries to adjust valves on large generator engines
- Removes cover bolts and adjusts valves on Waukesha® VHP® series engines
- Sockets are used with a XO2830 7/8"–15/16" standard length deep 60° offset wrench
- The offset on the wrench protects the user's hand during valve adjustment
- A retaining ring holds the socket onto the XO2830 wrench
- It holds it on the 7/8" part of the wrench as the sockets have a 7/8" male hex
- Retaining ring part number is ME7A87
- Manufactured from special alloy steel, precision forged and heat treated for optimum strength and durability
- Flank Drive® wrenching system grips fastener on the flanks/flat to prevent fasteners from rounding

OG2824

OG2828

	12	External Hex, inches
3/4	OG2824	7/8
7/8	OG2828	7/8

Shallow Single Square Impact Sockets

- These "end effector" sockets are used in the manufacturing of subsea and surface wellhead equipment for the oil and gas industry

IM748BC1.5

	Stock No.	Square Drive, inches	A	B	C	D	E
1	IM632BC1.5	3/4	2 1/8	1 3/4	—	2 1/4	3/4
1 1/2	IM748BC1.5	1	2 7/8	2 3/8	1 5/8	3 1/2	7/8
1.66	IM753.1BC1.5	1	1 15/16	2 3/8	—	3 1/2	1 1/16
1	IM732BC1.5	1	2 1/8	2 1/8	—	2 3/4	3/4

APW10VLV

ATSK3621

GADW10VLV

Specialty Service Tools

APW10VLV Valve Persuader Wrench

- "Refinery Wrench" used in oil and gas downstream facilities
- Great universal multi-tool for numerous daily applications including 4" and 6" quick turns to open and close valves

ATSK3621 Hex to Square Adaptor

- ATSK3621 is used with the B2192 Impact Pentagon Socket to remove and tighten special bolts used by electrical utilities on pad mounted and sub-surface underground facilities
- 7/16" hex–1/2" square adaptor
- 3" long

GADW10VLV Valve Persuader Wrench

- Two tools combined into one convenient operator's tool that can be used wherever valves are adjusted for flow and pressure
- 10" overall length supplies leverage while being compact enough to be easily carried
- Big-mouth adjustable wrench has large, 1 3/4" capacity
- 3/4" valve wheel wrench opening
- Precision hardened and anti-corrosion treated
- Easy-to-read size measurement scale: fractional on one side, metric on the other

⚠WARNING

- Do not use "cheater bars" on handles
- Do not use chrome or industrial finish hand tools with impact drivers
- Read safety precautions on pages W1 to W4

RAILROAD SERVICE TOOLS

5703747UP

IM728NT

IM736NT



Lag Screw Sockets

	Stock No.	A	B	C	D	E
1 1/8 x 7/8	5703747UP	1 7/8	2 1/8	1 3/4	3 1/2	7/8
1	IM728NT	1 3/4	2 1/8	31/32	2 1/8	13/16
1 1/8	IM736NT	1 13/16	2 1/4	1 3/32	2 1/4	3/4

5703747UP Lag Screw Socket
- For use on special rectangular head lag screws
- Rectangular head timber screw spikes are used to secure the rail anchor or rail clip
- The screw spikes are used by all railroads to varying degrees, but mainly the North American freight railroads (BNSF, NS, CSX, UPRR, KCS, CP Rail and CN Rail)
- The opening is 1 1/8" × 7/8" with a 1" square drive and can be used on an impact wrench

IM728NT Lag Screw Socket

IM736NT Lag Screw Socket

N8834

N8835

N8842

N8741

Track Bolt and Frog Bolt Sockets

	Stock No.	Square Drive, inches
1 11/16	N8834	1
1 13/16	N8835	1
1 5/8	N8842	1
1 7/16	SIM746NT	1
2 3/16	N8741	1

N8741 Frog Bolt Socket
- 1" drive socket is used primarily for Frog bolt applications

N8913

Side Bearing Cage Socket

	Stock No.	A	B	C	D	E
E20	N8913	1 5/32	1 5/8	3/4	1 3/4	1/2

N8913 Side Bearing Cage Socket
- Use this 3/4" drive E20 TORX® socket to service the breakoff portion of the side bearing cage bolt
- Installation of shear type E20 bolt during alignment of suspensions on Hendrickson® trailers

Railroad Torque Socket

	Stock No.	A	B	C	D	E
3/4"	SIMDTSA402	2	1 3/4	4 5/8	5 7/16	13/16

SIMDTSA402 Railroad Torque Socket



Railroad Wrench

	Stock No.	B	D	E
13/16–7/8	GVO2628TH.20	1 11/16–1 13/16	7/32	10

GVO2628TH.20

M4431B

GVO2628TH.20 Open End Wrench
- Used on railroad auxiliary generator coupler nuts (EMD Locomotives)

M4431B Car Yard Inspector Wrench
- Tightens air brake external nuts and cover screws
- Incorporates four 12-point sockets (3/4", 7/8", 15/16" and 1") plus a 9/16" open wrench all-in-one tool
- Box end portion of wrench is 10 3/8" long
- Open end portion of wrench is 6 1/4" long

NUT SPLITTERS

Hydraulic Nut Splitter

CG675HY Hydraulic Nut Splitter
- 6 ton controlled hydraulic power for removal of frozen or corroded nuts up to 2H hardness and 1 3/4" across the flats or 2" hex on soft nuts
- Includes CG652 ram and pump set
- 1 1/2" stroke

CG675 Nut Splitter
- Nut splitter without the hydraulics

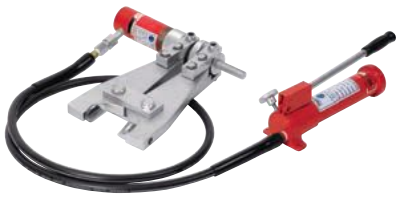

CG675HY

Manual Nut Splitter

NC52 Nut Splitter
- For splitting nuts up to 3/4" across the flats
- Bar acts as a handle to hold tool securely

NC52-3 Extra Cutter

NC52-4A Anvil

NC52

CABLE CUTTERS

Hydraulic Cable Cutters

CG410HY Hydraulic Cable Cutter
- Cut steel cable up to 1 1/4" in diameter easily with up to 29 tons of force generated by this hydraulic package
- Hardened tool steel cutting blade and die make clean, square cuts and provide long, dependable service
- Both can be resharpened
- Includes CG420-2A pump, CG420-3-1 hose and CG420-4 coupler set

CG410 Cable Cutter
- Cable cutter without the hydraulics

CG420-2A 1 Stage Pump
One-stage 20, 35 and 50 ton pump

CG420-3-1 Hose

CG420-4 Coupler

CG410HY

WARNING

- Read and follow all instructions
- Keep hands and body clear of cutter and splitter parts
- Read safety precautions on pages W1 to W4

AS YOU GET BIGGER, WE GET BETTER.

As you grow, Snap-on® tool sets grow with you. From your first day in the shop, to the top of the ladder, Snap-on has set-building solutions to fit your needs. Starting with our Apprentice Set, each tool set builds on the others – allowing your tool set to grow with your skill set. Or, you can simply start big: shop veterans find our larger sets to be the most comprehensive in the industry. That means all-in-one, turnkey solutions for increased productivity.

HOW IT WORKS.

Building a set from scratch? These sets will help set your business apart.

9100GSBO Apprentice Set — Includes a balanced selection of 1/4", 3/8" and 1/2" square drive tools, wrenches, screwdrivers, pliers, punches and chisels – everything for the "routine maintenance" basics.

9000GS2 — As your needs grow, add the second tool group: with more than 100 additional tools for more advanced work. And, as you add on new tool groups, you can expand your storage as well. It's the smart way to build your inventory: the ultimate hand tool inventory growing in lockstep with storage.

9600GSBO Complete Set

KRA2055FPBO

9100GSO

9100GSO Apprentice Set

Stock No.	Description	Page
114ATMP	1/4" Dr. General Service Set, 6-Point (14pc)	126
206EAU	3/8" Dr. Adaptor/Extension Set (6pc)	144
211FSY	Shallow, 6-Point (11pc) (1/4 – 7/8")	146
211SFSY	3/8" Dr. Deep Socket Set, 6-Point (11pc)	148
317MSPC	1/2" Dr. General Service Set, 6-Point (17pc)	209
91ACP	Adjustable Joint Pliers	337
AW1015DHK	Hex Wrench Set (15pc) (.028"–3/8")	270
BP16B	Ball Peen Hammer, 16 oz	356
CSA8C	Carbon Scraper	365
ECF201A	3 W, (2) D Cell, LED Flashlight	—
F80	Standard Handle	138
GA295	Mirror	683
GAC1580A	Dust/Impact Goggles	731
HBPT16	Plastic Tip Hammer	355
HSG319	Bi-Mold Handle Hacksaw	358
OEX709B	Combination Wrench Set, 12-Point (9pc)	244
PL300CF	Pliers/Cutters Set (3pc)	334
PPC710BK	Punch and Chisel Set (11pc)	351
PRH57A	Retaining Ring Pliers, Convertible	340
PT5C	Magnetic Pick-up Tool	682
PWC6	Wire Stripper/Cutter Pliers	344
SHDX800	Combination Screwdriver Set, Orange (8pc)	304
TPMA12	Tape Rule, US (12')	680

9100GSBO Complete Apprentice Set
- Includes 9100GSO and KRA2055FPBO top chest

9100GSO Apprentice Set
- More than 100pc for a well-balanced selection
- Does not include top chest

9100GSM Metric Plus Apprentice Set
- 9100GS Set plus AWM110DK metric hex wrench Set (11pc), 212FMY Metric 12-point socket Set (12pc) and OEXM710B metric 12-point combination wrench set (10pc)
- Does not include top chest

For the latest product components please visit:
www.snapon.com/setbuilding

US SET 2

9000GS2

KRA4059FPBO

9000GS2 Add-on Group

Stock No.	Description	Page
110STMY	1/4" 10pc set	111
112TMMY	1/4" Dr. Metric Shallow Socket Set, 6-Point (12pc)	110
1650	Prybar, 16"	332
2004BSKA	Battery Service Kit (4pc)	614
212EFTXY	1/4" and 3/8" Dr. Torx® Driver Set (12pc)	117
212FSMY	3/8" Dr. Metric Shallow Socket Set, 6-Point (12pc)	146
212SFSMY	3/8" Dr. Metric Deep Socket Set, 6-Point (12pc)	147
AC5C	Hand Scratch Brush	738
AWM110DHK	Metric Hex Wrench Set, L-Shaped	270
EECT4H	Circuit Tester	518
FADH12A	Adjustable Wrench, Cushion Handle, 12"	272
FB303B	Wire Gap Gauge	678
FB316B	Spark/Ignition Gauge (18 blades)	677
FB325A	US/Metric Gauge (25 blades)	677
FB361A	Gapper Gauge	678
FLF80	3/8" Dr. Long Flex Head Sealed Ratchet	138
FXK11	3/8" Dr. Extension, 11"	143
GSAF1E	Square Drive Adaptor	108
LP10WR	Locking Pliers, 10"	338
OEX30B	Std. Length Combination Wrench, 15/16"	244
OEX32B	Combination Wrench, 12-Point, 1"	244
OEXM710B	Metric Combination Wrench Set (10pc)	243
PK53A	Putty Knife/Scraper	366
RXFS605B	3/8" Dr. Double End Flare Nut Wrench Set (5pc)	257
S9704KR	3/8" Dr. Spark Plug Retention Socket, 6-Point, 13/16"	174
S9706KRA	Spark Plug Retention Socket, 6-Point, 5/8"	372
SGA173BR	Radiator Hose Pick	432
SGASA204AO	Miniature Pick Set, 4pc	328
SGDMRC44B	Ratcheting Soft Grip Screwdriver	314
SGT4BR	1/4" Dr. Standard Shank Driver	106
TMXK60	1/4" Dr. Extension, 6"	108

9200GSB Complete US Set 2
- Includes 9100GSO, 9000GS2 plus KRA4059FPBO top chest

9200AGSO US Set 2
- More than 200pc: includes all tools in 9100GSO and 9000GS2
- Does not include tool storage

9000GS2 Add-on Group 2
- More than 100pc in the add-on to 9100GSO apprentice set
- Does not include tool storage unit

KRA4008FPBO

KRA4059FPBO

9000GS30

9000GS30 Add-on Group

Stock No.	Description	Page
112STMMY	¼" 12pc Deep socket set	111
207EFAMY	3/8" Dr. Metric Hex Driver Set (7pc)	157
208EFAY	3/8" Dr. Hex Driver Set (8pc)	158
309SIMYA	½" Dr. Deep Impact Socket Set, 6-Point (9pc)	202
310IMMYA	½" Dr. Metric Shallow Impact Socket Set, 6-Point (10pc)	200
310SIMMYA	½" Dr. Metric Deep Impact Socket Set, 6-Point (10pc)	202
311IMYA	½" Dr. Shallow Impact Socket Set, 6-Point (11pc)	201
313TWMYA	½" Dr. Metric Socket Set, 6-Point (13pc)	191
AC58E	Wire Brush	738
GA3000B	Ear Protectors	729
IP80D	½" Dr. Impact Universal Joint	199
JCK7D	Fender Cover	670
JT13B	Blow Gun	504
MG725	½" Dr. Impact Wrench	464
OEXM6B	Metric Short Combination Wrench, 12-Point, 6 mm	246
OEXM7B	Metric Short Combination Wrench, 12-Point, 7 mm	246
OEXM8B	Metric Short Combination Wrench, 12-Point, 8 mm	246
OEXM9B	Metric Short Combination Wrench, 12-Point, 9 mm	246
QD3R250	½" Dr. Torque Wrench, 50–250 ft-lb	279
RXFMS606B	Metric Double End Flare Nut Wrench Set (6pc)	257
S8	1/2" Dr. Universal Joint	109
SL80A	½" Dr. Long Handle Sealed Ratchet	185
SPBS240	Prybar with Handle, 24", Orange	330
SXK3	½" Dr. Extension, 3 ½"	189
TF72	¼" Dr. Flex Head Sealed Ratchet	103
TMXK140	¼" Dr. Extension, 14" long	108

9300GSBO Complete US Set 3
- Includes 9200AGSO, 9000GS30 plus KRA4059FPBO top chest and KRA4008FPBO roll cab

9300GSO US Set 3
- More than 300pc: includes all tools in 9200AGSO and 9000GS30
- Does not include tool storage

9000GS30 Add-on Group 3
- More than 100pc in the add-on to 9200AGSO US Set 2
- Does not include tool storage

For the latest product components please visit:
www.snapon.com/setbuilding

WARNING • Read safety precautions on pages W1 to W4

US SET 4

9000GS40

KRL756CPBO

KRL751PBO

9000GS40 Add-on Group

Stock No.	Description	Page
1250	Prybar, 12" long	332
206AFSA	3/8" Dr. Universal Shallow Socket, 12-Point (6pc)	149
206FSUMA	3/8" Dr. Metric Universal Shallow Socket Set, 6-Point (6pc)	149
207SFRH	3/8" Dr. Metric Crowfoot Wrench Set (7pc)	260
210FRHMA	3/8" Dr. Metric Crowfoot Wrench Set (10pc)	260
313TSYA	1/2" Dr. Deep Socket Set, 6-Point (13pc)	192
388CF	High Leverage Cutter	335
61ACP	Duck Bill Pliers	336
AWP160	Adjustable Joint, Tongue & Groove Pliers	337
BP24B	Ball Peen Hammer, 24 oz	356
CJ2001P	Bolt Grip Puller Set	393
CSA12CO	Carbon Scraper, Orange	365
E1020	Extractor Set, 20pc	383
FADH8A	Adjustable Wrench, Cushion Handle, 8"	272
FL80	3/8" Dr. Long Handle Sealed Ratchet	138
FX24A	3/8" Dr. Extension, 24"	143
FXK4	3/8" Dr. Extension, 4"	143
FXK8	3/8" Dr. Extension, 8"	143
HBBD32	Ball Peen Dead Blow Hammer, 32 oz	5
HBFE32	Dead Blow Hammer, 32 oz	5
JCW60R	Creeper, Red	671
LP7WR	Locking Pliers, 7"	338
OEX080B	Short Combination Wrench, 12-Point, 1/4"	247
OEX10B	Combination Wrench, 12-Point, 5/16"	244
OEX34B	Combination Wrench, 12-Point, 1 1/16"	244
OEX36B	Combination Wrench, 12-Point, 1 1/8"	244
OEX40B	Combination Wrench, 12-Point, 1 1/4"	244

Stock No.	Description	Page
OEXM200B	Metric Combination Wrench, 12-Point, 20 mm	243
OEXM210B	Metric Combination Wrench, 12-Point, 21 mm	243
OEXM220B	Metric Combination Wrench, 12-Point, 22 mm	243
OEXS709B	Short Combination Wrench Set, 12-Point (9pc)	247
OEXSM710B	Metric Short Comb. Wr. Set, 12-Point (10pc)	246
PPB1012A	Bronze Tapered Punch, 3/8"	352
PPC104A	Pin Punch, 1/8"	351
PPC108A	Pin Punch, 1/4"	351
PPC204A	Starter Punch, 1/8"	351
PPC208A	Starter Punch, 1/4"	351
PPC3A	Center Punch, 1/8"	351
PPC5A	Punch/Chisel Holder	351
SGCP1BR	Cotter Pin Puller	588
SGHBF500A	File Set with Handles (4pc)	363
SHDX400	Mini Combination Screwdriver Set, Orange (4pc)	304
SN24C	1/2" Dr. Breaker Bar, 24"	187
SPBS180	Prybar w/Handle, 18" Orange	330
SRPC105	Retaining Ring Pliers Set (5pc)	339
SSM5A	Flat Tip Screw Starter	317
SX2	1/2" Dr. Extension, 2"	189
TA3	1/4"–3/8" Adaptor	109
TD2425	Tap and Die Set (41pc)	377
TDM117A	Metric Tap and Die Set (41pc)	377
TF528D	Tube Cutting and Double Flaring Set	14
TM61A	1/4" Dr. Flexible Extension, 6"	108
TMX1	1/4" Dr. Extension, 1 1/4"	108
TMXK110	1/4" Dr. Extension, Knurled,11" Long	108
UTK100	Utility Knife	361

9400GSBO Complete US Set 4
- Includes: 9300GSO, 9000GS40 plus KRL751PBO top chest and KRL756CPBO roll cab

9400GSO US Set 4
- More than 600pc: includes all tools in 9300GSO and 9000GS40
- Does not include tool storage

9000GS40 Add-on Group 4
- More than 250pc in the add-on to 9300GSO US Set 3
- Does not include tool storage

KRL751PBO

KRL756CPBO

9000GS5O

9000GS5O Add-on Group

Stock No.	Description	Page
196CF	Needle Nose Pliers with Side Cutter, 7 1/8"	336
212IMFYA	3/8" Dr. Shallow Impact Socket Set, 6 Point (12pc)	163
212SIMFYA	3/8" Dr. Deep Impact Socket Set, 6 Point (12pc)	164
214IMFMYA	3/8" Dr. Shallow Impact Socket Set, 6 Point (14pc)	163
214SIMFMYA	3/8" Dr. Deep Impact Socket Set, 6 Point (14pc)	164
313TSMYA	1/2" Dr. Metric Deep Socket Set, 6 Point (13pc)	192
497CF	90° Angle Jaw Needle Nose Pliers	336
650	Prybar, 6"	332
AWP120	Adjustable Joint, Tongue & Groove Pliers	337
BP8B	Ball Peen Hammer, 8 oz.	356
CJ2002	Bar Type Gear Puller Set	392
F12LA	3/8" Dr. Breaker Bar	142
FADH10A	Adjustable Wrench, Cushion Handle, 10"	272
FAR7200	Super Duty Air Ratchet, 3/8" Drive	464
FBF80	3/8" Bent Handle Flex Head	138
FK80	3/8" Dr. Stubby Head Sealed Ratchet	138
HBBT24	Bronze Tip Hammer, 24 oz	355
IMM200	1/2" Dr. Metric Shallow Impact Socket, 6 Point, 20 mm	200
IMM210	1/2" Dr. Metric Shallow Impact Socket, 6 Point, 21 mm	200
IMM220	1/2" Dr. Metric Shallow Impact Socket, 6 Point, 22 mm	200
IMM230	1/2" Dr. Metric Shallow Impact Socket, 6 Point, 23 mm	200
IMM240	1/2" Dr. Metric Shallow Impact Socket, 6 Point, 24 mm	200
IPF800B	3/8" Dr. Impact Universal Joint	162
KB2178	Kit Bag	351
MG325	3/8" Drive Air Impact Wrench	464
OEX11B	Combination Wrench, 12-Point, 11/32"	244
OEX260B	Short Combination Wrench, 12-Point, 13/16"	247
OEX280B	Short Combination Wrench, 12-Point, 7/8"	247
OEX300B	Short Combination Wrench, 12-Point, 15/16"	247
OEX320B	Short Combination Wrench, 12-Point, 1"	247
OEX38B	Combination Wrench, 12-Point, 1 3/16"	244
OEX42B	Combination Wrench, 12-Point, 1 5/16"	244
OEX8B	Combination Wrench, 12-Point, 1/4"	244
OEXM230B	Metric Standard Combination Wrench, 12-Point, 23 mm	243
OEXM240B	Metric Standard Combination Wrench, 12-Point, 24 mm	243
OEXM90B	Metric Standard Combination Wrench, 12 Point, 9 mm	243
OXI10B	Midget Combination Wrench, 12-Point, 5/16"	248
OXI12B	Midget Combination Wrench 12-Point, 3/8"	248

Stock No.	Description	Page
OXI706B	Fractional Midget Comb. Wrench Set, 12-point (6pc)	248
OXI8B	Midget Combination Wrench, 12-Point, 1/4"	248
OXIM710B	Metric Midget Comb. Wrench Set, 12-Point (10pc)	247
OXIM7B	Metrc Midget Combination Wrench, 12-Point, 7 mm	247
OXIM8B	Metric Midget Combination Wrench, 12-Point, 8 mm	247
OXIM9B	Metric Midget Combination Wrench, 12-Point, 9 mm	247
PPC110A	Pin Punch, 5/16"	351
PPC112	Pin Punch, 3/8"	351
PPC210A	Starter Punch, 5/16"	351
PPC824B	Flat Chisel, 3/4"	351
PPC828B	Flat Chisel, 7/8"	351
PT28E	Pick-up Tool	682
PWC14	Wire Stripper/Cutter/Crimper/Bolt Cutter, 8 3/4"	344
QD2R100	3/8" Dr. Adj. Click Type Torque Wrench 20–100 ft-lb	279
RTD48	Rethreading Kit (48pc)	19
S9704KFUA	Universal	173
S9706KRFUA	3/8" Dr. Spark Plug Universal Socket, 13/16"	372
SDM400A	Screwdriver Bit Set (37pc)	316
SF80A	1/2" Dr. Flex Head Sealed Ratchet	185
SHDP162O	Phillips® Tip Screwdriver, #2, Orange, 16"	307
SHDP62IRO	*Phillips* Tip Screwdriver, #2, Orange, 6"	307
SHDP63IRO	*Phillips* Tip Screwdriver, #3, Orange, 6"	307
SIMM200	1/2" Dr. Deep Impact Socket, 6-Point, 20 mm	202
SIMM210	1/2" Dr. Deep Impact Socket, 6-Point, 21 mm	202
SIMM220	1/2" Dr. Deep Impact Socket, 6-Point, 22 mm	202
SIMM230	1/2" Dr. Deep Impact Socket, 6-Point, 23 mm	202
SIMM240	1/2" Dr. Deep Impact Socket, 6-Point, 24 mm	202
SPBS12O	Prybar with Handle, 12", Orange	330
SSDE42C	Flat, Thin Blade Electronic Screwdriver	308
SSDE43C	Flat, Thin Blade Electronic Screwdriver	308
SSDE44C	Flat, Thin Blade Electronic Screwdriver	308
SSDE46C	Flat, Thin Blade Electronic Screwdriver	308
SSDE48C	Flat, Thin Blade Electronic Screwdriver	308
SSDMR1AO	Ratcheting Magnetic Screwdriver, Orange	315
TC123C	Tube Cutter	13
VS807B	Open End Wrench Set (7pc)	256
XB605A	Fractional Offset Box Wrench Set, 12-Point (5pc)	250
XBM605A	Metric Box End Wrench Set, 12-Point (5pc)	249

9500GSBO Complete US Set 5
- Includes 9400GSO, 9000GS5O plus KRL751PBO top chest and KRL756CPBO roll cab

9500GSO US Set 5
- More than 800pc: includes all tools in 9400GSO and 9000GS50
- Does not include tool storage

9000GS5O Add-on Group 5
- More than 150pc in the add-on to 9400GSO US Set 4
- Does not include tool storage

For the latest product components please visit:
www.snapon.com/setbuilding

WARNING • Read safety precautions on pages W1 to W4

US SET 6

KRL722BPBO

9000GS6O

KRA276D

KRL791APBO

9000GS6O Add-on Group

Stock No.	Description	Page
106ATMXWP	1/4" Dr. Wobble Extension Set (6pc)	108
106TMUSA	1/4", Dr. Universal Socket Set, 6-Point (6pc)	114
10SSD	Offset Flat Tip Screwdriver	311
110ETMAY	1/4" Dr. Hex Driver Set (10pc)	120
120SSDP	Offset Phillips® Screwdriver, #1 and #2	311
2050	Prybar, 20"	332
205IPF	3/8" Dr Shallow Impact Swivel Socket Set, 6-Point (5pc)	165
206AFXWP	3/8" Dr. Wobble Extension Set (6pc)	144
20SSD	Offset Flat Tip Screwdriver	311
307IPLY	Frac. 1/2" Dr. Impact Swivel Socket Set, 6-Point (5pc)	204
A265A	Socket Rail, 12 Clips, 1/4" Drive, 7 3/8"	84
A271BB	Bulk Clips (qty. 6)	—
AWP45	Adjustable Joint, Tongue & Groove Pliers, 4 3/4"	337
AWP65	Adjustable Joint, Tongue & Groove Pliers, 7"	337
BP12B	Ball Peen Hammer, 12 oz	356
CHN480	Adjustable Joint Pliers, 20"	—
CJ2003A	Rear Axle Puller Set	392
CJ2004	Interchangeable Puller Set	392
CJ2005	Puller Accessory Set	392
CM6551	Miniature Screwdriver Set (5pc)	311
DBTR129	Drill Bit Set, 29 Bits	450
E703BCG	Electronic Needle Nose Pliers	341
E704BCG	Elec. Needle Nose Pliers, 60° Bent Tip, Non-Serrated	341
E710BCG	Electronic Taper Head Cutters, True Flush Cut	342
FADH6A	Adjustable Wrench, Cushion Handle, 6"	272
FAR25A	1/4" Dr. Air Ratchet	464
FS12B	3/8" Dr. Universal Shallow Socket, 6 Point, 3/8"	149
FSUM11A	3/8" Dr. Universal Shallow Socket, 6-Point, 11 mm	149
FSUM16A	3/8" Dr. Universal Shallow Socket, 6-Point, 16 mm	149
FSUM18A	3/8" Dr. Universal Shallow Socket, 6-Point, 18 mm	149
FSUM19A	3/8" Dr. Universal Shallow Socket, 6-Point, 19 mm	149
FX18	3/8" Dr. Extension, 18"	143
FX36	3/8" Dr. Extension, 36"	143
HBFE48	Dead Blow Hammer, 48 oz	5
IMTM10A	1/4" Dr. Shallow Impact Socket, 6-Point, 5/16"	122
IMTM12A	1/4" Dr. Shallow Impact Socket, 6-Point, 3/8"	122
IMTM14A	1/4" Dr. Shallow Impact Socket, 6-Point, 7/16"	122
IMTM16A	1/4" Dr. Shallow Impact Socket, 6-Point, 1/2"	122
IMTM18A	1/4" Dr. Shallow Impact Socket, 6-Point, 9/16"	122
IMTM8A	1/4" Dr. Shallow Impact Socket, 6-Point, 1/4"	122
IMTMM10	1/4" Dr. Metric Impact Socket, 6-Point, 10 mm	122
IMTMM11	1/4" Dr. Metric Impact Socket, 6-Point, 11 mm	122
IMTMM12	1/4" Dr. Metric Impact Socket, 6-Point, 12 mm	122
IMTMM13	1/4" Dr. Metric Impact Socket, 6-Point, 13 mm	122
IMTMM14	1/4" Dr. Metric Impact Socket, 6-Point, 14 mm	122

Stock No.	Description	Page
IMTMM15	1/4" Dr. Metric Impact Socket, 6-Point, 15 mm	122
IMTMM5	1/4" Dr. Metric Impact Socket, 6-Point, 5 mm	122
IMTMM5.5	1/4" Dr. Metric Impact Socket, 6-Point, 5.5 mm	122
IMTMM6	1/4" Dr. Metric Impact Socket, 6-Point, 6 mm	122
IMTMM7	1/4" Dr. Metric Impact Socket, 6-Point, 7 mm	122
IMTMM8	1/4" Dr. Metric Impact Socket, 6-Point, 8 mm	122
IMTMM9	1/4" Dr. Metric Impact Socket, 6-Point, 9 mm	122
LP6LN	Locking Long Nose Pliers, 6"	338
NDD900B	Metric Nut Driver Set (9pc)	318
OEX44B	Combination Wrench, 12-Point, 1 3/8"	244
OEX46B	Combination Wrench, 12-Point, 1 7/16"	244
OEX48B	Combination Wrench, 12-Point, 1 1/2"	244
PDR3000A	Air Drill, 3/8"	464
PPR708BK	Roll Pin Punch Set (8pc)	352
R810C	Frac. Ratcheting Box Wrench, 12-Point, 1/4"-5/16"	239
RB604C	Frac. Ratcheting Box Wrench Set, 12-Point (4pc)	239
RXS605B	Flare Nut/Open End Wrench Set, 6 Point (5pc)	257
SGFMN106	Mixed File Set (6pc)	363
SHDTX315O	T15 Torx® Screwdriver, Orange	311
SHDTX320O	T20 *Torx* Screwdriver, Orange	311
SPBS8O	Prybar with Handle, 8", Orange	330
SSDMR8AO	Ratcheting Magnetic Screwdriver, Orange	315
SX15	1/2" Dr. Extension, 15"	189
TD9902B	Tap and Die Set (25pc)	377
TS381	1/2", Dr. Deep Socket, 6-Point, 1 3/16"	192
TS401	1/2" Dr. Deep Socket, 6-Point 1 1/4"	192
TS421	1/2" Dr. Deep Socket, 6-Point 1 5/16"	192
TW381	1/2" Dr. Socket, 6-Point, 1 3/16"	191
TW401	1/2" Dr. Socket, 6-Point, 1 1/4"	191
TW421	1/2", Dr. Socket, 6-Point, 1 5/16"	191
TW441	1/2" Dr. Socket, 6-Point, 1 3/8"	191
TW461	1/2" Dr. Socket, 6-Point, 1 7/16"	191
TW481	1/2" Dr. Socket, 6-Point, 1 1/2"	191
TWM25	1/2", Dr. Metric Socket, 6-Point, 25 mm	191
TWM26	1/2" Dr. Metric Socket, 6-Point, 26 mm	191
TWM27	1/2", Dr. Metric Socket, 6-Point, 27 mm	191
TWM30	1/2" Dr. Metric Socket, 6-Point, 30 mm	191
TWM32	1/2" Dr. Metric Socket, 6-Point, 32 mm	191
VE200A	Puller Control Board	392
VS26B	Open End Wrench, 13/16"	256
VS28B	Open End Wrench, 7/8"	256
VS30B	Open End Wrench, 15/16"	256
VS32B	Open End Wrench , 1"	256
XO605	Fractional Offset Box Wrench Set, 12-Point (5pc)	251

9600GSBO Complete US Set 6
- Includes 9500GSO, 9000GS6O plus KRL791APBO top chest, KRL722BPBO roll cab and KRA276D wall cabinet

9600GSO US Set 6
- More than 1000pc: includes all tools in 9500GSO and 9000GS6O
- Does not include tool storage

9000GS6O Add-on Group 6
- More than 250pc in the add-on to 9500GSO US Set 5
- Does not include tool storage

KRA4059FPBO

9100AGMO

9100AGMO Metric Basic Set A

Stock No.	Description	Page
112STMMY	¼" Dr. Metric Deep Skt. Set, 6-Point (12 pcs)	111
117TMM	¼" Dr. Metric Starter Set (17 pcs)	125
1650	Prybar, 16" long	332
2004BSKA	Battery Service Kit (4pc)	614
206EAU	⅜" Dr. Adaptor Set (6 pcs)	144
212EFTXY	1/4" and 3/8" Dr. TORX® Driver Set (12pc)	117
212FSMY	⅜" Dr. Metric Socket Set, 6 Point (12 pcs)	146
212SFSMY	3/8" Dr. Metric Deep Socket Set, 6 Point (12pc)	147
317AMMPC	½" Dr. Metric Gen. Service Set, 6 Point (17 pcs)	209
91ACP	Adjustable Joint Pliers	334
97CF	Needle Nose Pliers	334
AWM110DHK	Metric Hex Wrench Set (11pc)	270
BP16B	Ball Peen Hammer, 16 oz.	356
CSA8C	Carbon Scraper	365
ECF201A	3 watt LED Flashlight	—
EECT4H	Circuit Tester	518
F80	⅜" Dr. Sealed Ratchet	138
FADH12A	Adjustable Wrench, Cushion Handle, 12"	272
FB316B	Ignition/Spark Plug Gauge Set (18 blades)	677
FB360C	Feeler Gauge Set (6 blades)	678
FB361A	Gapper Gauge	678
FBM320	Metric Feeler Gauge Set (20 blades)	677
FLF80	⅜" Dr. Long Flex Head Sealed Ratchet	138

Stock No.	Description	Page
FXK11	⅜" 8" Dr. Extension, 11" long	143
GA295	Mirror	683
GAC1580A	Dust/Impact Goggles	731
GSAF1E	Square Drive Adaptor	109
HBPT16	Plastic Tip Hammer, 16 oz	355
HSG319	Bi-Mold Handle Hacksaw	358
LP10WR	Locking Pliers, 10" long	338
OEXM710B	Metric Combination Wrench Set, 12-Point (10 pcs)	243
PK53A	Scraper	366
PL300CF	Needle Nose/Diagonal Cutter/Pliers Set (3 pcs)	334
PPC710BK	Punch and Chisel Set (11pc)	351
PRH57A	Retaining Ring Pliers, Convertible	340
PT5C	Telescopic Pick-up Tool	682
PWC6	Wire Stripper/Cutter Pliers	344
RXFMS606B	Metric Double End Flare Nut Wrench Set (6pc)	257
S9704KA	⅜" Dr. Spark Plug Retention Socket, 6 Point, 13/16"	18
S9706KRA	⅜" Dr. Spark Plug Retention Socket, 6 Point, 5/8"	372
SGA173BR	Radiator Hose Pick	636
SGASA204AO	Miniature Awl/Pick Set, Orange (4 pcs)	328
SGT4BR	Standard Shank Driver	106
SHDX80O	Combination Screwdriver Set, Orange (8pc)	304
SSDMR4BO	Ratcheting Magnetic Screwdriver, Orange	315
TMXK60	¼" Dr. Extension, 6" long	108
TPMA25EM	English/Metric Tape Rule 25'/7.5 M	680

9100GMBO Complete Metric Set A
- More than 150pc: includes 9100AGMO plus KRA4059FPBO top chest

9100AGMO Metric Basic Set A
- Does not include tool storage

For the latest product components please visit:
www.snapon.com/setbuilding

WARNING • Read safety precautions on pages W1 to W4

METRIC SETS B

9000GM2O

KRA4059FPBO

KRA4008FPBO

9000GM2O Add-on Group

Stock No.	Description	Page
1250	Prybar, 12" long	332
206FSUMA	3/8" Dr. Metric Shallow Universal Socket Set, 6-Point (6pc)	149
207EFAMY	3/8" Dr. Metric Hex Driver Set (7pc)	157
210FRHMA	3/8" Dr. Met. Flare Nut Wrench Set, 6-Point (10 pcs)	260
310IMMYA	1/2" Dr. Shallow Metric Impact Socket Set, 6-Point (10pc)	200
310SIMMYA	1/2" Dr. Deep Metric Impact Socket Set, 6-Point (10pc)	202
313TSMYA	1/2" Dr. Metric Deep Socket Set, 12-Point (13pc)	192
388CF	Hi Leverage Cutters, 7 3/4" long	335
61ACP	Duck Bill Pliers, 7 3/4" long	336
AC58E	Wire Brush	738
AWP160	Adjustable Joint, Tongue & Groove Pliers	337
BP24B	Ball Peen Hammer, 24 oz	356
CJ2001P	Bolt Grip Puller Set	393
CSA12CO	Carbon Scraper	365
E1020	Extractor Set (20pc)	383
FADH8A	Adjustable Wrench, Cushion Handle, 8"	272
FL80	3/8" Dr. Long Handle Sealed Ratchet	138
FX24A	3/8" Dr. Extension, 24" long	143
FXK4	3/8" Dr. Extension, 4" long	143
FXK8	3/8" Dr. Extension, 8" long	143
GA3000B	Ear Protectors	729
HBFE32	Dead Blow Hammer, 32 oz	5
IP80D	1/2" Dr. Impact Swivel Socket	199
JCK7D	Fender Cover	670
JT13B	Blow Gun	504
LP7WR	Locking Pliers, 7" long	338
MG725	Heavy Duty Air Impact Wrench, 1/2" Dr.	464
OEXM200B	Metric Combination Wrench, 12-Point, 20 mm	243
OEXM210B	Metric Combination Wrench, 12-Point, 21 mm	243
OEXM220B	Metric Combination Wrench, 12-Point, 22 mm	243
OEXM6B	Metric Short Combination Wrench, 12-Point, 6 mm	246
OEXM7B	Metric Short Combination Wrench, 12-Point, 7 mm	246
OEXM8B	Metric Short Combination Wrench, 12-Point, 8 mm	246
OEXM9B	Metric Short Combination Wrench, 12-point, 9 mm	246
OEXSM710B	Metric Short Combination Wrench Set 12-Point (10pc)	246
PPC104A	Pin Punch, 1/8"	351
PPC108A	Pin Punch, 1/4"	351
PPC204A	Starter Punch, 1/8"	351
PPC208A	Starter Punch, 1/4"	351
PPC3A	Center Punch, 5/16"	351
QD3RM30	1/2" Dr. Click Type Torque Wrench, 30 kg-m	280
S8	1/2" Dr. Universal Joint	109
SGCP1BR	Cotter Pin Puller	588
SGHBF500A	File Set with Handles (4pc)	363
SL80A	1/2" Dr. Long Handle Sealed Ratchet	185
SN24C	1/2" Dr. Breaker Bar, 24" long	187
SPBS24O	Prybar with Handle, 24" long, Orange	330
SRPC105	Retaining Ring Pliers (5pc)	339
SXK3	1/2" Dr. Extension, 3" long	189
TA3	1/4"–3/8" Dr. Adaptor	109
TC28C	Tube Cutter	13
TDM117A	Metric Tap and Die Set (41pc)	378
TF72	1/4" Dr. Flex Head Sealed Ratchet	103
TFM428	Flaring Tool	14
TMX1	1/4" Dr. Extension, 1" long	108
TMXK140	1/4" Dr. Extension, 14" long	108
UTK100	Utility Knife	361

9200GMBO Complete Metric Set B
- Includes: 9100AGMO, 9000GM2O plus KRA4059FPBO top chest and KRA4008FPBO roll cab

9200GMO Metric Set B
- More than 400pc
- Does not include tool storage

9000GM2O Add-on Group B
- More than 200pc
- Does not include tool storage

KRL751PBO

KRL756CPBO

9000GM3O

9000GM3O Add-on Group

Stock No.	Description	Page
106ATMXWP	1/4" Dr. Wobble Extension Set (6pc)	108
196CF	Needle Nose Pliers with Cutter, 7 1/8"	336
206AFXWP	3/8" Dr. Wobble Plus Extension Set (6pc)	144
214IMFMYA	3/8" Dr. Shallow Impact Socket Set, 6-Point (14pc)	163
214SIMFMYA	3/8" Dr. Metric Deep Impact Socket Set, 6 Point (14pc)	164
497CF	90° Angle Jaw Needle Nose Pliers	336
650	Prybar, 6"	260
AWP120	Adjustable Joint Tongue and Groove Pliers, 12 3/4"	337
BP8B	Ball Peen Hammer, 8 oz.	356
CJ2002	Puller Set	392
F12LA	Long Handle	142
FADH10A	Adjustable Wrench, Cushion Handle, 10"	272
FAR7200	Super Duty Air Ratchet, 3/8" Dr.	464
FBF80	Bent Handle Flex Head	138
FK80	3/8" Dr. Short Handle Ratchet	138
HBBD32	Dead Blow Ball Peen Hammer, 32 oz	5
HBBT24	Bronze Tip Hammer, 24 oz	355
IMM200	1/2" Dr. Metric Shallow Impact Socket, 6-Point, 20 mm	200
IMM210	1/2" Dr. Metric Shallow Impact Socket, 6-Point, 21 mm	200
IMM220	1/2" Dr. Metric Shallow Impact Socket, 6-Point, 22 mm	200
IMM230	1/2" Dr. Metric Shallow Impact Socket, 6-Point, 23 mm	200
IMM240	1/2" Dr. Metric Shallow Impact Socket, 6-Point, 24 mm	200
IPF800B	3/8" Dr. Impact Universal Joint	162
IPFM10C	3/8" Dr. Metric Shallow Swivel Impact Socket, 10 mm	165
IPFM12C	3/8" Dr. Metric Shallow Swivel Impact Socket, 12 mm	165
IPFM13C	3/8" Dr. Metric Shallow Swivel Impact Socket, 13 mm	165
IPFM14C	3/8" Dr. Metric Shallow Swivel Impact Socket, 14 mm	165
IPFM15C	3/8" Dr. Metric Shallow Swivel Impact Socket, 15 mm	165
IPFM16C	3/8" Dr. Metric Shallow Swivel Impact Socket, 16 mm	165
IPFM17C	3/8" Dr. Metric Shallow Swivel Impact Socket, 17 mm	165
IPFM18C	3/8" Dr. Metric Shallow Swivel Impact Socket, 18 mm	165
IPFM19C	3/8" Dr. Metric Shallow Swivel Impact Socket, 19 mm	165
IPFM9C	3/8" Dr. Metric Shallow Swivel Impact Socket, 9 mm	165
JCW60R	Creeper	671
KB2178	Kit Bag	351
MG325	3/8" Dr. Air Impact Wrench	464
OEXM230B	Metric Combination Wrench, 12-Point, 23 mm	243
OEXM240B	Metric Combination Wrench, 12-Point, 24 mm	243
OEXM270B	Metric Combination Wrench, 12-Point, 27 mm	243
OEXM300B	Metric Combination Wrench, 12-Point, 30 mm	243
OEXM90B	Metric Combination Wrench, 12-Point, 9 mm	243
OXIM710B	Metric Midget Comb. Wrench Set, 12-Point (10pc)	247
OXIM7B	Metrc Midget Combination Wrench, 12-Point, 7 mm	247
OXIM8B	Metric Midget Combination Wrench, 12-Point, 8 mm	247
OXIM9B	Metric Midget Combination Wrench, 12-Point, 9 mm	247
PPB1012A	Bronzed Tapered Punch, 3/8"	352
PPC110A	Pin Punch, 5/16"	351
PPC112	Pin Punch, 3/8"	351
PPC210A	Starter Punch, 5/16"	351
PPC5A	Punch and Chisel Holder	351
PPC824B	Flat Chisel, 3/4"	351
PPC828B	Flat Chisel, 7/8"	351
PT28E	Pick-up Tool	682
PWC14	Wire Stripper/Cutter/Bolt Cutter	344
QD2RM1000	Metric Adj. Click Type Torque Wrench 3/8"	280
RTD48	Rethreading Kit (48pc)	374
S9704KFUA	Universal	173
S9706KRFUA	3/8" Dr. Spark Plug Universal Socket, 6-Point, 5/8"	372
SDM400A	Screwdriver Bit Set (37pc)	319
SF80	1/2" Dr. Sealed Flex Head Ratchet	185
SGD304BR	Flat Tip Electronics Sc. Dr., .018" x 1/8" x 3"	305
SHDP162O	Phillips Tip Screwdriver #2, Orange	307
SHDP62IRO	*Phillips* Screwdriver, #2, Orange	307
SHDP63IRO	*Phillips* Tip Screwdriver #3, Orange	307
SIMM200	1/2" Dr. Deep Impact Socket, 6-Point, 20 mm	202
SIMM210	1/2" Dr. Deep Impact Socket, 6 Point, 21 mm 41	202
SIMM220	1/2" Dr. Deep Impact Socket, 6-Point, 22 mm	202
SIMM230	1/2" Dr. Deep Impact Socket, 6-Point, 23 mm	202
SIMM240	1/2" Dr. Deep Impact Socket, 6-Point, 24 mm	202
SPBS12O	Prybar with Handle, 12", Orange	330
SSDE42C	Flat Tip Electronics Sc. Drive, .018 x 1/8 x 2"	308
SSDE44C	Flat Tip Electronics Sc. Drive, .018 x 1/8 x 4"	308
SSDE66C	Flat Tip Electronics Sc. Drive, .030" x 3/16" x 6"	308
SSDE68C	Flat Tip Electronics Sc. Drive, .028" x 3/16" x 8"	308
SSDMR1AO	Ratcheting Magnetic Screwdriver, Orange 137	315
SX2	1/2" Dr. Extension, 2" 69	189
TC123C	Tubing Cutter	368
TM61A	1/4" Dr. Flexible Extension, 6"	108
TMXK110	1/4" Dr. Extension, 11"	108
TWM25	1/2", Dr. Metric Socket, 6-Point, 25 mm 36	191
TWM26	1/2" Dr. Metric Socket, 6-Point, 26 mm	191
TWM27	1/2", Dr. Metric Socket, 6-Point, 27 mm	191
TWM30	1/2" Dr. Metric Socket, 6-Point, 30 mm	191
VSM807B	Metric Open End Wrench Set (7pc)	256
XBM605A	Metric Long Offset Box Wrench Set (5pc)	249
XOM605	Metric Deep Offset Box Wrench Set (5pc)	251

9300GMBO Complete Metric Set C
Includes: 9200GMO, 9000GM3O plus KRL751PBO tool chest and KRL756CPBO roll cab

9300GMO Metric Set C
- More than 600pc: includes all tools in 9200GMO and 9000GM3O
- Does not include tool storage

9000GM3O Complete Metric Set C
- Includes 9200GMO, 9000GM3O plus KRL751PBO top chest and KRL756CPBO roll cab

For the latest product components please visit:
www.snapon.com/setbuilding

WARNING

• Read safety precautions on pages W1 to W4

METRIC SETS D

9000GM4O

KRL751PBO

KRL756CPBO

9000GM4O Add-on Group

Stock No.	Description	Page
106ETMAMY	1/4" Dr. Metric Hex Driver Set (6pc)	119
10SSD	Offset Flat Tip Screwdriver	311
111TMUSMA	1/4" Dr. Metric U-Socket Set (11pc)	113
120SSDP	Phillips® Offset Screwdriver, #1-#2	311
2050	Prybar, 20"	332
20SSD	Offset Flat Tip Screwdriver	311
307IPLMY	1/2" Dr. Impact Swivel Sockets, 6-Point (7pc)	204
AWP65	Adjustable Joint Tongue & Groove Pliers	337
BP12B	Ball Peen Hammer, 12 oz	356
CHN480	Adjustable Joint Pliers, 20"	—
CJ2003A	Rear Axle Puller Set	392
CJ2004	Interchangeable Puller Set	392
CJ2005	Puller Accessory Set	392
CM6551	Miniature Screwdriver Set	311
DBTR129	Drill Bit Set 1/16"–1/4" (29pc)	450
E703BCG	Elec. Needle Nose Pliers, Serrated Jaws	341
E704BCG	Elec. Needle Nose Pliers, 60° Bent Tip, Nonserrated	341
E710BCG	Taper Head Electronic Cutters, True Flush Cut	342
FADH6A	Adjustable Wrench, Cushion Handle, 6"	272
FAR25A	1/4" Dr. Air Ratchet	464
FSM61	3/8" Dr. Metric Socket, 6-Point, 6 mm	146
FSM71	3/8" Dr Metric Socket, 6-Point, 7 mm	146
FSUM11A	3/8" Dr. Shallow Universal Socket, 6-Point, 11 mm	149
FSUM16A	3/8" Dr. Shallow Universal Socket, 6-Point, 16 mm	149
FSUM18A	3/8" Dr. Shallow Universal Socket, 6-Point, 18 mm	149
FSUM19A	3/8" Dr. Shallow Universal Socket, 6-Point, 19 mm	149
FX18	3/8" Dr. Extension, 18"	143
FX36	3/8" Dr. Extension, 36"	143
HBFE48	Dead Blow Hammer, 48 oz	5
IMTMM10	1/4" Dr. Metric Impact Socket, 6-Point, 10 mm	122
IMTMM11	1/4" Dr. Metric Impact Socket, 6-Point, 11 mm	122
IMTMM12	1/4" Dr. Metric Impact Socket, 6-Point, 12 mm	122
IMTMM13	1/4" Dr. Metric Impact Socket, 6-Point, 13 mm	122
IMTMM14	1/4" Dr. Metric Impact Socket, 6-Point, 14 mm	122
IMTMM15	1/4" Dr. Metric Impact Socket, 6-Point, 15 mm	122
IMTMM5	1/4" Dr. Metric Impact Socket, 6-Point, 5 mm	122
IMTMM5.5	1/4" Dr. Metric Impact Socket, 6-Point, 5.5 mm	122
IMTMM6	1/4" Dr. Metric Impact Socket, 6-Point, 6 mm	122
IMTMM7	1/4" Dr. Metric Impact Socket, 6-Point, 7 mm	122
IMTMM8	1/4" Dr. Metric Impact Socket, 6-Point, 8 mm	122
IMTMM9	1/4" Dr. Metric Impact Socket, 6-Point, 9 mm	122
LP5WR	Curved Jaw Locking Plier, 6"	338
LP6LN	Long Nose Pliers, 6"	338
NDDM900A	Metric Nut Driver Set (9pc)	318
OEXM250B	Metric Combination Wrench, 12-Point, 25 mm	243
OEXM260B	Metric Combination Wrench, 12-Point, 26 mm	243
OEXM290B	Metric Combination Wrench, 12-Point, 29 mm	243
OEXM320B	Metric Combination Wrench, 12-Point, 32 mm	243
PDR3000A	Heavy Duty Air Drill, 3/8"	464
PPR708BK	Roll Pin Punch Set (8pc)	352
RBM1011C	12-Point Metric Ratcheting Box Wrench	239
RBM1213C	12-Point Metric Ratcheting Box Wrench	239
RBM1415C	12-Point Metric Ratcheting Box Wrench	239
RBM1719C	12-Point Metric Ratcheting Box Wrench	239
RXSM605B	Metric Flare Nut/Open End Wrench Set, 6-Point (5pc)	257
SFSM6	1/4" Dr. Metric Deep Socket, 6-Point, 6 mm	147
SFSM7	1/4 " Dr. Metric Deep Socket, 6-Point, 7 mm	147
SGFMN106	Mixed File Set (6pc)	363
SHDTX315O	T15 TORX® Screwdriver, Orange	311
SHDTX320O	T20 *TORX* Screwdriver, Orange	311
SPBS8O	Prybar with Handle, Orange, 8"	330
SSDMR8AO	Ratcheting Magnetic Screwdriver, Orange	315
STMM4.5	1/4" Dr. Metric Deep Socket, 6-Point, 4.5 mm	111
SX15	1/2" Dr. Extension, 15"	189
TDM99117B	Metric Tap and Die Set (25pc)	378
TMM4.5	1/4" Dr. Metric Socket, 6-Point, 4.5 mm	110
TSM26	1/2" Dr. Metric Deep Socket, 6-Point, 26 mm	192
TSM27	1/2" Dr. Metric Deep Socket, 6-Point, 27 mm	192
TSM30	1/2" Dr. Metric Deep Socket, 6-Point, 30 mm	192
TSM32	1/2" Dr. Metric Deep Socket, 6-Point, 32 mm	192
TWM10A	1/2" Dr. Metric Socket, 6-Point, 10 mm	191
TWM11A	1/2" Dr. Metric Socket, 6-Point, 11 mm	191
TWM28	1/2" Dr. Metric Socket, 6-Point, 28 mm	191
TWM29	1/2" Dr. Metric Socket, 6-Point, 29 mm	191
TWM31	1/2" Dr. Metric Socket, 6-Point, 31 mm	191
TWM32	1/2" Dr. Metric Socket, 6-Point, 32 mm	191
VE200A	Puller Control Board	392

9400GMBO Complete Metric Set D
- Includes: 9300GMO, 9000GM4O plus KRL751PBO top chest, KRL756CPBO roll cab and KRA276D wall cabinet

9400GMO Metric Set D
- More than 800pc: includes all tools in 9300GMO and 9000GM4O
- Does not include tool storage

9000GM4O Add-on Group D
- More than 175pc in the add-on set to 9300GMO Set C
- Does not include tool storage

Overview.....442

Cordless.....444

Air.....463

Accessories.....487

POWER TOOLS

SO MUCH POWER. SO MANY OPTIONS.

Snap-on provides you with almost countless ways to wield power – from lithium cordless impact wrenches, to robust air tools, to ergonomic sanders and much, much more. But it doesn't stop there. Because the power is paired with unrivaled comfort and control. Choose from any one of our vast selection of power tools. And help create a surge in your business.

POWER

Snap-on puts the power in your hands – in any number of ways. Choose the tool, turn on the power, get the job done. End of story.

POWERFUL TORQUE — More power per pound. Snap-on® power tools are built with durable lightweight bodies – but pack a power punch.

CORDLESS TOOLS — With abundant power. Provides long-lasting power for the lithium series tools you use most.

ACCESSIBILITY — Big power to small spaces. Lets you get power to places where only hand tools used to go.

COMFORT AND CONTROL

Snap-on power tools are ergonomically designed to provide both comfort and control. So while they have power, you'll have staying power.

BALANCED WEIGHT — Feel the difference. A lightweight housing design balances the weight, so you get better control.

ERGONOMIC GRIPS — It makes perfect sense: when a tool feels better in your hand, it's that much easier to use.

COMPACT NOSE DESIGN — By removing unnecessary bulk, you get better access to restricted areas. Less is more.

"The power to do what you need, when and where you need it. No strings attached."

James Millikin
Nolensville, TN

James has:
18volt 3/8" drive cordless impact - CT8810A

UNPLUGGED. UNEQUALED.

Snap-on® cordless tools combine heavy-duty power with max mobility. What's more, you'll always have the proper tool for the proper torque – in low, medium and high torque applications.

Lightweight and Comfortable — Designed to feel balanced and natural in your hand.

Power — Pull the trigger and feel the power from an industry leader in cordless tools.

Durability, Capability — Tough tools that go anywhere – and do a great job when they arrive.

Higher-Grade Materials — Internal components combined with glass-filled nylon housings means these tools can tackle the toughest jobs.

AN ENTIRE BATTERY OF BATTERIES.

Power up with more battery options than ever before.

18V Lithium Batteries
The CTB8184 4.0Ah Battery is lightweight and long lasting, and contains the highest-grade lithium cells available. It features a built-in digital fuel gauge and a micro-controller that senses temperature and amperage – protecting the motor before it can overheat.

MicroLithium 14.4V
The new 14.4 MicroLithium™ 2.0Ah Battery has a quick charge time of 55 minutes, allowing you to work throughout the day on multiple jobs.

Impacts

Specifications	CT8850†	CT6818†	CT8815A†	CT8810A†	CT4415†	CT4418†	CT761†	CT725†	CT596†	CT595†
Battery Type	MonsterLithium™ 4.0 Ah	Ni-Cad 2.5 Ah	*MonsterLithium* 4.0 Ah	*MonsterLithium* 4.0 Ah	Ni-Cad 2.5 Ah	Ni-Cad 2.5 Ah	MicroLithium™ 2.0 Ah	*MicroLithium* 2.0 Ah	Ni-Cad 700 mAh	Ni-Cad 700 mAh
Battery Voltage	18	18	18	18	18	18	14.4	14.4	9.6	9.6
Square Drive, inches	1/2	1/2	1/2	3/8	1/2	3/8	3/8	1/4	3/8	1/4
Torque Output, ft-lb (N•m)	600 (813)	500 (678)	230 (311.8)	230 (311.8)	180 (244)	180 (244)	120 (163)	70 (95)	60 (81)	50 (67)
Blows Per Minute, BPM	2,280	2,150	3,480	3,480	3,440	3,440	3,000	3,000	3,000	3,000
Free Speed, RPM	1,900	1,900	2,400	2,400	2,230	2,230	2,200	2,500	2,500	2,500
Length, inches (mm)	9.6 (244)	9.6 (244)	6.5 (165)	6.5 (165)	6.5 (165)	6.5 (165)	6.3 (160)	6.3 (160)	6.2 (157)	6.2 (157)
Height w/ Battery, inches (mm)	10.2 (259)	10.2 (259)	9.5 (241)	9.5 (241)	9.5 (241)	9.5 (241)	7.7 (195)	7.7 (195)	7.1 (180)	7.1 (180)
Weight w/ Battery, lb (kg)	7.3 (3)	8 (3.6)	4.5 (2.4)	4.5 (2.4)	5.5 (2.5)	5.5 (2.5)	2.5 (1.1)	2 (0.9)	1.7 (.77)	1.7 (.77)
Charge Time (minutes)	60	40	60	60	40	40	55	55	55	55
Warranty (battery)	2 Years/ 1,000 Cycles	1 Year	2 Years/ 1,000 Cycles	2 Years/ 1,000 Cycles	1 Year	1 Year	1 Year	1 Year	1 Year	1 Year
Warranty (tool, charger)	1 Year	1 Year	1 Year	1 Year	1 Year	1 Year	1 Year	1 Year	1 Year	1 Year
Pinned Anvil Version	CT8850P†	CT6818P†	CT8815AP	CT8810AP	–	CT4418P	–	–	–	CT4418P
Quick Change Chuck Version (hex size of chuck)	CT8850QC† (7/16")	CT6818QC† (7/16")	–	CT8810AQC (1/4")	–	CT4418QC (1/4")	CT761QC† (1/4")	CT725QC† (1/4")	CT596QC	–
Tool Body Only	CT8850DB†	CT6818DB†	CT8815ADB	CT8810ADB	CT4415DB	CT4418DB	CT761DB†	CT725DB†	CT596DB	CT595DB

†CE

Drills/Drivers

Stock No.	CDR8850H	CDR6850	CDR761A	CTS761	CTS725	CTS596
Battery Type	*MonsterLithium* 4.0 Ah	Ni-Cad 2.5 Ah	*MicroLithium* 2.0 Ah	*MicroLithium* 2.0 Ah	*MicroLithium* 2.0 Ah	Ni-Cad 700 mAh
Battery Voltage		18	14.4	14.4	14.4	9.6
Chuck Capacity, inches	1/2	1/2	3/8	1/4 hex	1/4 hex	1/4 hex
Torque Output, inches lb (N•m)	450 (51)	450 (50.8)	150 (16.9)	150 (17)	100 (11.2)	60 (6.8)
Clutch Settings	22	22	9	9	9	6
Gear Box Type	2-speed	2-speed	2-speed	2-speed	Single speed	Single speed
RPM (Low)	0–500	0–500	0–400	0–400	—	—
RPM (High)	0–1,800	0–1,800	0–1,400	0–1,400	0–400	0–400
Charge Time (minutes)	60	40	55	55	55	55
Length, inches (mm)	10.25 (260)	10.25 (260)	7.5 (190.5)	5.8 (147.3)	5.4 (137)	5.2 (132)
Weight w/ Battery, lb (kg)	5.2 (2.3)	6.3 (2.8)	2.4 (1.1)	2.0 (0.9)	2 (0.9)	1.5 (.68)
Warranty (battery)	2 Years/ 1,000 Cycles	1 Year	1 Year	1 Year	1 Year	1 Year
Warranty (tool, charger)	1 Year	1 Year	1 Year	1 Year	1 Year	1 Year
Tool Body Only	CDR8850HDB†	CDR6850DB†	CDR761ADB	CTS761DB	CTS725DB	CTS596DB

†CE

⚠WARNING

• Read and follow safety messages for each type of Cordless Tool on the following pages and the safety precautions on pages W1 to W4

CORDLESS: QUICK REFERENCE CHART

Reciprocating Saws/Grease Guns

Stock No.	CTRS8850†	CTRS761†	CGG4850†
Battery Type	MonsterLithium™ 4.0 Ah	MicroLithium™ 2.0 Ah	Ni-Cad 2.5 Ah
Battery Voltage	18	14.4	18
Stroke Length, inches (mm)	1 (25.4)	1/2 (12.7)	—
Strokes Per Minute	2,400	0-3,000	—
Capacity (tubes dispensed w/ one battery)	—	—	12
Hose Length, inches (mm)	—	—	30 (762)
Pressure Rating (PSI)	—	—	7500
Charge Time (minutes)	60	55	40
Length, inches (mm)	18 (457)	12" (304mm)	15.8 (401)
Height w/ Battery, inches (mm)	8.25 (210)	12.5 (317.5)	13 (330)
Weight w/ Battery, lb (kg)	7.7 (3.4)	1.4 (.64)	9.5 (4.3)
Warranty (battery)	2 Years/1,000 Cycles	1 Year	1 Year
Warranty (tool, charger)	1 Year	1 Year	1 Year
Tool Body Only	CTRS8850DB†	CTRS761DB†	CGG4850DB†

†CE

Adhesive Guns

Stock No.	CAG8850DBKIT
Battery Type	*MonsterLithium* 4.0 Ah
Battery Voltage	18
Weight w/ Battery, lb (kg)	1.2 (0.5)
Actuation	Manual Feed
Adhesive Output	2.5 lb Per Hour
Adhesive Stick	1/2" Round
Nozzle Type	Ball Check
Stroke: Grams Per Squeeze	1.2
Service Rating	Industrial
Temperature	350 °F Nominal, 380 °F Maximum
Temperature Control	Solid State

Ratchets

Stock No.	CTR725A	CTR761A
Battery Type	*MicroLithium* 2.0 Ah	*MicroLithium* 2.0 Ah
Battery Voltage	14.4	14.4
Square Drive, inches (mm)	1/4 (6)	3/8 (10)
Torque Output, ft-lb (N•m)	30 (40.6)	30 (40.6)
Free Speed, RPM	350	350
Charge Time (minutes)	55	55
Weight, lb (kg)	2.5 (1.1)	2.5 (1.1)
Height w/ Battery, inches (mm)	12.2 (310)	12.2 (310)
Warranty (battery)	1 Year	1 Year
Warranty (tool, charger)	1 Year	1 Year
Tool Only	CTR725ADB	CTR761ADB

Grinder

Stock No.	CTGR8850
Battery Type	*MonsterLithium* 4.0 Ah
Battery Voltage	18
Wheel Size, inches (mm)	4.5 (114) or 5 (127)
Arbor Size, inches (mm)	7/8 (22)
Free Speed, RPM	8,000
Length w/ Battery, inches (mm)	16.5 (419)
Weight w/ Battery, lb (kg)	5.7 (2.4)
Warranty (Battery)	2 Years/1,000 Cycles
Warranty (tool, charger)	1 Year
Tool Only	CTGR8850DB

CT8850

CT8850G

CT8850O

CT6818

18V Impact Wrenches

CT8850 18V MonsterLithium™ Impact

- 600 ft-lb torque output
- Built-in super bright 1 W LED light
- Built-in anvil brake stop
- Digital microprocessor controlled switch for precise control
- Rare earth magnet motor provides greater torque
- Housing screen keeps debris out of the tool
- Thermal temperature controlled motor prolongs tool life
- Includes two *MonsterLithium* batteries and charger in a tote bag
- Also available: CT8850G (green kit), CT8850DBG (green, tool only), CT8850O (orange kit) and CT8850DBO (orange, tool only)

CT6818 18V Ni-Cad Impact

- 500 ft-lb torque output
- Glass filled nylon housing provides durability and strength
- Patented air flow system routes cool air over the motor to extend tool life
- Needle bearing support helical cut gears distribute even torque load from the motor
- Ergonomic cushion grip absorbs vibration and reduces fatigue
- Super heavy duty motor is cushion mounted to reduce vibration
- One-handed forward/reverse lever
- Includes two Ni-Cad batteries and charger in a tote bag

Stock No.	CT8850†	CT6818†
Battery Type	*MonsterLithium* 4.0 Ah	Ni-Cad 2.5 Ah
Battery Voltage	18	18
Square Drive, inches (mm)	1/2 (13)	1/2 (13)
Anvil Type	Friction Ring	Friction Ring
Torque Output, ft-lb (N•m)	600 (813)	500 (678)
Blows Per Minute, bpm	2,280	2,150
Free Speed, RPM	1,900	1,900
Charge Time (minutes)	60	40
Length, inches (mm)	9.6 (244)	9.6 (244)
Weight w/ Battery, lb (kg)	7.3 (3)	8 (3.6)
Warranty (battery)	2 Years/1,000 Cycles	1 Year
Warranty (tool & charger)	1 Year	1 Year
Pinned Anvil Version	CT8850P†	CT6818P†
Quick Change Chuck Version (hex size of chuck)	CT8850QC† (7/16")	CT6818QC† (7/16")
Tool Only	CT8850DB†	CT6818DB†
Battery (qty)	CTB8185† (2)	CTB4187† (2)
Tote Bag	CTUTOTE	CTUTOTE
Charger	CTC720†	CTC620†
Optional Protective Boot	CT8850BOOT	CT8850BOOT
Color Option: Green	CT8850G	—
Color Option: Orange	CT8850O	—

†CE

⚠WARNING

- Use only impact sockets and accessories with impact wrenches
- Read safety precautions on pages W1 to W4

CORDLESS: 18-VOLT IMPACT WRENCHES

CT8815A

CT8810A

CT8810AO

CT8810AG

18V Impact Wrenches

CT8815A/CT8810A 1/2" and 3/8" Square Drive 18V Cordless Impact Wrench

- Provides an incredibly powerful 230 ft-lb at a light weight of 4.5 lb
- High capacity 72 watt-hour, 18V MonsterLithium™ battery for long run time
- High efficiency rare-earth magnet, four-brush motor for maximum durability
- The CT8815A can remove 525 bolts tightened at 200 ft-lb on one battery charge
- Cold-formed, alloy steel anvil for maximum durability
- The digital fuel gauge and micro-controller in the lithium battery monitors temperature and amperage to prevent motor overheating
- Ergonomic overmolded cushion grip for continuous use with less fatigue
- Includes tool, 2 batteries and a tote bag
- Also available: CT8810G (green kit), CT8810AGDB (green, tool only), CT8810AO (orange kit) and CT8810AODB (orange, tool only)

Specifications	CT8815A†	CT8810A†
Battery Type	*MonsterLithium* 4.0 Ah	*MonsterLithium* 4.0 Ah
Battery Voltage	18	18
Square Drive, inches (mm)	1/2 (13)	3/8 (10)
Anvil Type	Friction Ring	Friction Ring
Torque Output, ft-lb (N•m)	230 (311.8)	230 (311.8)
Blows Per Minute, bpm	3,480	3,480
Free Speed, RPM	2,400	2,400
Charge Time (minutes)	60	60
Length, inches (mm)	6.5 (165)	6.5 (165)
Weight w/ Battery, lb (kg)	4.5 (2.4)	4.5 (2.4)
Warranty (battery)	2 Years/1,000 Cycles	2 Years/1,000 Cycles
Warranty (tool & charger)	1 Year	1 Year
Pinned Anvil Version	CT8815AP†	CT8810AP†
Quick Change Chuck Version (hex size)	—	CT8810AQC (1/4")
Tool Only	CT8815ADB†	CT8810ADB†
Battery (qty)	CTB8185† (2)	CTB8185† (2)
Tote Bag	CTUTOTE	CTUTOTE
Charger	CTC720†	CTC720†
Optional Protective Boot	CT8810BOOT	CT8810BOOT

†CE – DE, ES, GB, FR, IT, NL, UL, CUL

CT4415

CT4418

18V Impact Wrenches

CT4415/CT4418 1/2" and 3/8" Square Drive 18V Cordless Impact Wrenches

- 180 ft-lb torque output
- Light illuminates the work area
- High efficiency rare-earth magnet, four-brush, motor for maximum durability
- Micro-controlled digital switch, with variable speed, protects the unit from overheating
- High capacity 2.5 Ah, 18V Ni-Cad battery for long run time
- Alloy steel, heat treated, helical gears for maximum durability
- Alloy steel hammer and gear carrier, accurately machined for maximum durability
- Patented impact mechanism design
- Cold-formed, alloy steel anvil for maximum durability
- Housings are made from high-strength, impact-modified 30% glass-filled Nylon 6 material
- Ergonomic design, with soft grip handles to reduce user fatigue
- Includes tool, two batteries and a tote bag

Specifications	CT4415†	CT4418†
Battery Type	Ni-Cad 2.5 Ah	Ni-Cad 2.5 Ah
Battery Voltage	18	18
Square Drive, inches (mm)	1/2 (13)	3/8 (10)
Anvil Type	Friction Ring	Friction Ring
Torque Output, ft-lb (N•m)	180 (244)	180 (244)
Blows Per Minute, bpm	3,440	3,440
Free Speed, RPM	2,230	2,230
Charge Time (minutes)	40	40
Length, inches (mm)	6.5 (165)	6.5 (165)
Weight w/ Battery, lb (kg)	5.5 (2.5)	5.5 (2.5)
Warranty (battery)	1 Year	1 Year
Warranty (tool & charger)	1 Year	1 Year
Pinned Anvil version	—	CT4418P†
Quick Change Chuck version (hex size)	—	CT4418QC (1/4")
Tool Only	CT4415DB	CT4418DB†
Battery (qty)	CTB4187† (2)	CTB4187† (2)
Tote Bag	CTUTOTE	CTUTOTE
Charger	CTC620†	CTC620†
Optional Protective Boot	CT8810BOOT	CT8810BOOT

† CE

WARNING

- Use only impact sockets and accessories with impact wrenches
- Read safety precautions on pages W1 to W4

CORDLESS: 18-VOLT PLATFORMS

CDR8850H

CDR6850

18V Drills

CDR8850H 18V MonsterLithium™ Hammer Drill

- 1/2" single sleeve steel chuck with carbide jaws
- Heavy duty gearing designed for metal drilling
- Overmolded ergonomic cushion grip absorbs vibration and reduces user fatigue
- Digital microprocessor-controlled variable speed switch maximizes performance, runtime and durability
- 22-position clutch with two-speed gearbox provides torque control for the correct application
- Super bright 1 watt LED illuminates work area
- Stainless-steel motor screen keeps debris out of motor to extend life
- Included two 18V Lithium 4.0 Ah batteries and charger with a tote bag

CDR6850 18V Ni-Cad Drill

- Industrial strength, heavy duty gearing designed for drilling in metal
- Heavy duty single sleeve keyless chuck with carbide jaws grips bits securely and prevents slippage
- 22-position clutch with a two-speed gearbox provides torque control for driving applications
- Glass filled nylon housing is rugged and provides durability and strength
- Overmolded ergonomic cushion grip absorbs vibration and reduces user fatigue
- Stainless-steel motor screens keep debris out of the motor, extending tool life
- Contoured variable speed trigger provides ergonomic comfort and superior control
- Includes tool, 1 battery and a tote bag

Specifications	CDR8850H†	CDR6850†
Battery Type	*MonsterLithium* 4.0 Ah	Ni-Cad 2.5 Ah
Battery Voltage	18	18
Chuck Capacity, inches (mm)	1/2 (13)	1/2 (13)
Torque Output, in-lb (N•m)	450 (50.8)	450 (50.8)
Clutch Settings	22	22
Gear Box Type	3-speed	2-speed
Hammer Mode	Yes	No
RPM (Low)	0–500	0–500
RPM (High)	0–1,800	0–1,800
Charge Time (minutes)	60	40
Length, inches (mm)	10.25 (260)	10.25 (260)
Weight w/ Battery, lb (kg)	5.2 (20)	6.3 (2.8)
Height w/ Battery, inches (mm)	9.75 (247.6)	9.75 (247.6)
Warranty (tool & charger)	1 Year	1 Year
Warranty (battery)	2 Years/1,000 Cycles	1 Year
Battery (qty)	CTB8185† (2)	CTB4187† (2)
Tote Bag	CTUTOTE	CTUTOTE
Charger	CTC720†	CTC620†
Tool Only	CDR8850HDB†	CDR6850DB†

†CE

CGG4850

18V Grease Guns

- All steel heavy duty gearing provides strength and durability
- High pressure 7,500 PSI hose stays flexible in cold weather
- Planetary spur gear system resists wear and stripping
- Includes tool, 2 batteries and a tote bag

Specifications	CGG4850†
Battery Type	Ni-Cad 2.5 Ah
Battery Voltage	18
Capacity, Tubes Per Charge	12
Hose Length, inches (mm)	30 (762)
Charge Time (minutes)	40
Length, inches (mm)	15.8 (401)
Weight w/ Battery, lb (kg)	9.5 (4.3)
Warranty (tool & charger)	1 Year
Warranty (battery)	1 Year
Battery (qty)	CTB4187† (2)
Tote Bag	CTTOTEA
Charger	CTC620†
Tool Only	CGG4850DB

†CE

CTRS8850

CTRS8850 18V Cordless Reciprocating Saw

- Two battery choices available: 18V Lithium or 18V Ni-Cad match the needs of any application
- 75A rated, heavy duty variable speed trigger provides long life and is contoured to reduce user fatigue
- Heavy duty 14 gauge internal wiring withstands high current loads during heavy sawing
- Spring loaded blade retention system requires no tools and ejects broken blades easily
- Nonslip cushion grip nose reduces vibration and provides positive tool control
- Heavy duty armature and balanced motor design provide smooth operation
- Turbine style cooling system reduces heat buildup, extending tool life
- Sealed nose mechanism prevents dirt and sawing debris from damaging internal components
- Includes tool, two batteries and a tote bag

18V Reciprocating Saws

Specifications	CTRS8850†
Battery Type	MonsterLithium™ 4.0 Ah
Battery Voltage	18
Stroke Length, inches (mm)	1 (25.4)
Strokes per Minute	2,400
Charge Time (minutes)	60
Length, inches (mm)	18 (457)
Weight w/ Battery, lb (kg)	6 (2.7)
Warranty (tool & charger)	1 Year
Warranty (battery)	2 Years/1,000 Cycles
Battery (qty)	CTB8185† (1)
Tote Bag	CTTOTEA
Charger	CTC720†
Tool Only	CTRS8850DB

†CE

⚠WARNING

- Use only impact sockets and accessories with impact wrenches
- Read safety precautions on pages W1 to W4

CORDLESS: 18-VOLT PLATFORMS

CTGR8850

18V Grinders/Cut-off Tool

- 8,000 RPMs handles most grinding jobs with ease
- Ultra slim head – lets you get into areas other grinders cannot
- Battery rotates 270° – the battery will not get in the way
- Takes 4.5" or 5" wheels – more options to get the job done fast
- Anti-vibration handle – allows you to work longer and more comfortably
- Replaceable motor screen – keeps debris out of the motor so the tool lasts longer
- Seven-position safety guard – lets you tackle most jobs with less effort
- Toolless guard removal – simply pull one guard off and slide the other one on
- Includes tool, one battery and tote bag

Specifications	CTGR8850
Battery Type	MonsterLithium™ 4.0 Ah
Battery Voltage	18
Wheel Size, inches (mm)	4.5 (114) or 5 (127)
Arbor Size, inches (mm)	7/8 (22)
Free Speed, RPM	8,000
Warranty (tool)	1 Year
Length w/ Battery, inches (mm)	16.5 (419)
Warranty (battery)	2 Years/1,000 Cycles
Tool Only	CTGR8850DB
Battery (qty)	CTB8185 (1)
Battery Charger	CTC720 (1)
Tote Bag	CTUTOTE
Replacement Grinding Wheel	PT450-WH (4.5")
Replacement Cut-off Wheel	CTGR-CW50

CAG8850DKIT
(battery sold separately)

18V Cordless Adhesive Guns

- High efficiency melt chamber up to 2.2 lb of material Output Per Hour
- Precision, Solid State Temperature Control – state-of-the-art electronics for consistent performance
- Easy Squeeze Two-Finger Trigger – unique design allows for constant use with no fatigue
- Low Battery/Auto Shut-Off Alarm – audible signal lets you know when battery is low
- Rugged High Impact Nylon Housing
- On/Off Activator – one push start up for rapid <4 minute warm-up time
- Ready/On/Low Battery Indicator – visual indicator allows the user to quickly see the state of operation

Applications:
Dent pulling, temporary metal tacking, pin repair, wire staking, woods, metals, plastics, fiberglass

Kit Includes:
CAG6850DB, three different nozzles and six assorted adhesive sticks (battery and charger not included)

Specifications	CAG8850DBKIT
Battery Type	*MonsterLithium* 4.0 Ah
Battery Voltage	18
Actuation	Manual Feed
Adhesive Output	2.5 lb Per Hour
Adhesive Stick	1/2" Round
Nozzle Type	Ball Check
Stroke: Grams Per Squeeze	1.2
Service Rating	Industrial
Temperature	350 °F Nominal, 380 °F Maximum
Temperature Control	Solid State
Weight with Battery	1.2 (0.5)

CADP8850KIT

CADP8850KIT 18V Cordless Adhesive Gun Dent Pulling Kit

- CADP8850 Mini Lifters ergonomic design means less hand fatigue
- CADP8850-1 high strength pull tabs do not stretch
- New CAG6850-901 blue glue provides the strongest pull in all temperatures and humidly of any dent glue on the market
- The CAG6850-901 blue glue in combination with the CADP8850-1 pull tabs exceeded all other tab and glue combination pull strength by 20% in lab testing
- CAG6850-901 blue glue peels off easily with solvent

CT761

CT725

CTS761

CTS725

MicroLithium Impact Wrenches and Screwdrivers

	Impact Wrenches		Screwdrivers	
Specifications	**CT761†**	**CT725†**	**CTS761†**	**CTS725†**
Battery Type	*MicroLithium* 2.0 Ah	*MicroLithium* 2.0 Ah	*MicroLithium* 2.0 Ah	*MicroLithium* 2.0 Ah
Battery Voltage	14.4	14.4	14.4	14.4
Square Drive, inches (mm)	3/8 (13)	1/4 (6)	1/4 Hex	1/4 Hex
Torque Output, ft-lb (N•m)	3/8 (10)	70 (95)	—	—
Torque Output, in-lb (N•m)	—	—	150 (17)	100 (11.2)
Clutch Settings	—	—	9	9
Free Speed, RPM	2,500	2,500	400/1,400	400
Blows Per Minute, bpm	3,000	3,000	—	—
Charge Time (minutes)	55	55	55	55
Length, inches (mm)	6.3 (160)	6.3 (160)	5.8 (147.3)	5.4 (137)
Height, inches (mm)	7.8 (197)	7.6 (193)	7.8 (198.1)	7.7 (195)
Weight w/Battery, lb (kg)	2 (0.9)	2 (0.9)	2 (0.9)	2 (0.9)
Warranty (tool & charger)	1 Year	1 Year	1 Year	1 Year
Warranty (battery)	1 Year	1 Year	1 Year	1 Year
Quick Change Chuck version (hex size)	**CT761QC†**	**CT725QC†**	—	—
Tool Only	**CT761DB**	**CT725DB**	**CTS761DB†**	**CTS725DB†**
Battery (qty)	**CTB8172 (2)**	**CTB8172 (2)**	**CTB8172† (2)**	**CTB8172 (2)**
Tote Bag	**CTUTOTE**	**CTUTOTE**	**CTUTOTE**	**CTUTOTE**
Charger	**CTC772†**	**CTC772**	**CTC772†**	**CTC772†**

*UL® and CUL listed

† CE

CT761 3/8" Square Drive 14.4V *MicroLithium* Cordless Impact Kit

- 2,000 RPM free speed
- 120 ft-lb (162.7 N•m) torque output
- Variable speed trigger
- Built-in brake
- Built-in LED light
- Also available: CT761G (green), CT761DBG (green, tool only), CT761O (orange) and CT761DBO (orange, tool only)

CT725 1/4" Square Drive 7.2/14.4V *MicroLithium* Cordless Impact Kit

- 60 ft-lb of torque output
- Variable-speed digital toggle-style trigger
- Built-in brake stops the anvil from spinning
- Twin-beam LED lights
- Built-in fuel gauge
- Also available: CT725G (green), CT725DBG (green, tool only), CT725O (orange) and CT725DBO (orange, tool only)

CTS725 1/4" Hex 7.2/14.4V *MicroLithium* Cordless Screwdriver

- 100 in-lb of torque output
- 400 RPM
- Variable-speed digital toggle-style trigger
- 275 in-lb manual spindle lock
- Nine-position clutch
- Built-in LED lights
- Also available: CTS725G (green), CTS725DBG (green, tool only), CTS725O (orange) and CTS725DBO (orange, tool only)

CTS761 14.4V Cordless Screwdriver

- Digital variable-speed toggle-style trigger for precise control
- Twin-beam headlights illuminate the work area
- Built-in brake stops the tool from throwing sockets and fasteners
- Nine-position clutch allows you to dial in the proper torque
- 150 in-lb of torque output
- Overcurrent protection protects the electronics
- Under voltage protection will not overdraw the battery
- Built-in gauge displays the battery charge state
- Screened motor keeps debris from entering critical components
- Cushion grip handle provides positive tool control with less fatigue
- Glass-filled nylon housing for durability
- Super bright LED head light
- Two-Speed Gearbox – 400/1,400 RPM
- 300 in-lb manual spindle lock torque
- Also available: CTS761G (green), CTS761DBG (green, tool only), CTS761O (orange) and CTS761DBO (orange, tool only)

⚠WARNING

- Do not use grinder without the guard
- Read safety precautions on pages W1 to W4

CORDLESS: 14.4-VOLT MICROLITHIUM™ PLATFORMS

CTR725A

CTR725AO

CTR725AG

CTR761A

CTR761AO

CTR761AG

14.4V *MicroLithium* Ratchets

- 30 ft-lb torque output
- Digital variable-speed trigger for precise control
- Built-in brake stops the tool from throwing sockets and fasteners
- Uses a chromed wear bushing to increase brake life
- Over and under temperature protection keeps tool operating at peak efficiency
- Battery "fuel gauge" LED cleverly integrated into handle
- Cushion-grip handle provides positive tool control with less fatigue
- Large, accessible reversing knob for easy mechanism direction changes
- Integrated LED headlight
- Includes tool, two batteries, charger and tote bag
- Also available: CTR725AG (green), CTR725AO (orange), CTR761AG (green) and CTR761AO (orange) versions

Specifications	CTR725A	CTR761A
Battery Type	*MicroLithium* 2.0 Ah	*MicroLithium* 2.0 Ah
Battery Voltage	14.4	14.4
Charge Time (minutes)	55	55
Square Drive, inches (mm)	1/4 (6)	3/8 (10)
Torque Output, ft-lb (N•m)	30 (40.6)	30 (40.6)
Manual Torque, ft-lb (N•m)	45 (61)	158 (214)
Free Speed, RPM	350	350
Height w/ Battery, inches (mm)	12.2 (310)	12.2 (310)
Weight w/ Battery, lb (kg)	2.5 (1.1)	2.5 (1.1)
Warranty (tool & charger)	1 Year	1 Year
Warranty (battery)	1 Year	1 Year
Tool Only	**CTR725ADB**	**CTR761ADB**
Battery (qty)	**CTB8172 (2)**	**CTB8172 (2)**
Tote Bag	**CTUTOTE**	**CTUTOTE**
Battery Charger	**CTC772**	**CTC772**

CE – DE, ES, FR, IT, GB, NL, JP

CTRS761

14.4V *MicroLithium* Saws

CTRS761 Cordless Reciprocating Saw

Specifications	CTRS761
Battery Type	*MicroLithium* 2.0 Ah
Battery Voltage	14.4
Length, inches (mm)	12 (304)
Weight w/ Battery Pack, lb (kg)	1.4 (.64)
Weight w/ Battery, lb (kg)	3.2 (1.4)
Stroke Length, inches (mm)	5/8 (15.8)
Strokes per Minute	0–3,000
Warranty (tool & charger)	1 Year
Tool Only	**CTRS761DB**

CDR761A

14.4V Drill

Specifications	CDR761A
Battery Type	*MicroLithium* 2.0 Ah
Battery Voltage	14.4
Chuck Cap., inches	3/8 (10)
Clutch Settings	9
Free Speed, RPM	0–400 Low (0–1,400 High)
Height, inches (mm)	7.8 (198.1)
Length, inches (mm)	7.5 (190.5)
Torque Output, in-lb (N•m)	150 (16.9)
Weight w/ Battery, lb (kg)	2.4 (1.1)
Operating Temperature	-4 °F (-20 °C) to 140 °F (60 °C)
Sound Pressure Level, dB(A)	73.7
Sound Power Level, dBa	85.3
Warranty (tool & charger)	1 Year
Warranty (battery)	1 Year
Tote Bag	CTUTOTE
Tool Only	CDR761ADB
Battery (qty)	CTB8172 (2)
Battery Charger	CTC772

CDR761A 14.4V *MicroLithium* Cordless Drill Kit

- Lightweight drill with battery only 2.4 lb
- Small size to get in tight spots – under dash, firewall, etc.
- Cushion grip handle – nonslip, comfort for the operator, positive tool control allows the operator to work longer with less fatigue
- 150 in-lb of torque handles a wide variety of applications
- Two-speed drill (400/1,400 RPM) – low speed for higher torque applications/high speed for steel drilling
- Variable speed switch for featherability and control
- Fuel gauge lets you keep track of battery capacity
- Nine-position clutch delivers a range of torques from 8–50 in-lb
- 3/8" keyless drill chuck-single sleeve durable steel chuck make changing bits easy
- Includes tool, two batteries, charger and tote bag

⚠WARNING

- Do not use in an explosive or flammable atmosphere
- Read safety precautions on pages W1 to W4

CORDLESS: 9.6-VOLT NI-CAD BATTERY PLATFORMS

CT596

CT596QC

CTS596

9.6V Impact Wrenches

- Small, lightweight design is easy to control and reduces user fatigue
- Oversized forward/reverse toggle trigger for versatility
- Integrated soft grip handle provides comfort and positive tool control
- Tapered, lightweight, aluminum nose gets into restricted applications easily
- Includes tool, two batteries, charger and tote bag

9.6V Screwdriver

- 1/4" quick change hex chuck provides secure bit retention
- Six position clutch for added torque control
- Small, lightweight design maneuvers easily in restricted access applications
- Up to 250 in-lb of manual torque can be applied to break stubborn fasteners loose
- Gearless spindle lock has no teeth or gears to break or chip
- Includes tool, two batteries, charger and tote bag

	Impact Wrenches			Screwdriver
Specifications	**CT596**	**CT596QC**	**CT595**	**CTS596**
Battery Type	Ni-Cad 700 mAh	Ni-Cad 700 mAh	Ni-Cad 700 mAh	Ni-Cad 700 mAh
Battery Voltage	9.6	9.6	9.6	9.6
Square Drive, inches	3/8	1/4 hex	1/4	1/4 hex
Torque Output, ft-lb (N•m)	60 (81.3)	45 (61)	50 (67)	–
in-lb	—	—	—	60 (6.8)
Clutch Settings	—	—	—	6
Free Speed, RPM	2,500	2,500	2,500	375
Blows Per Minute, bpm	3,000	3,000	3,000	—
Charge Time (minutes)	55	55	55	55
Length, inches (mm)	6.2 (157)	6.5 (165)	6.2 (157)	5.2 (132)
Weight w/ Battery, lb (kg)	1.7 (.77)	1.7 (.77)	1.7 (.77)	1.5 (.68)
Height w/ Battery, inches (mm)	7.1 (180)	7.1 (180)	7.1 (180)	7.1 (180)
Warranty (tool & charger)	1 Year	1 Year	1 Year	1 Year
Warranty (battery)	1 Year	1 Year	1 Year	1 Year
Battery (qty)	**CTB5196** (2)	**CTB5196** (2)	**CTB5196** (2)	**CTB5196** (2)
Tool Only	**CT596DB*†**	**CT596QCDB*†**	**CT595DB*†**	**CTS596DB*†**
Tote Bag	**CTUTOTE**	**CTUTOTE**	**CTUTOTE**	**CTUTOTE**
Charger	**CTC596†**	**CTC596†**	**CTC596†**	**CTC596†**

†CE

Batteries not included

CTLED7850

CTLED6818

CTLZ761

CTL761

CTLU761

CTLUH761

CTLED566A

CTLED7850 LED Work Light, 18V
- 300 lumens for a super bright output
- Dual reflector system: flood or spot option
- 12-hour run time
- 120° rotating head
- Low-battery indicator
- Tempered glass lens
- Resists automotive fluids
- Lightweight aluminum head
- Impact modified nylon housing

CTLED6818 LED Work Light, 18V
- 300 lumens for a super bright output
- Dual reflector system: flood or spot option (mirror reflector included, changes unit into a flood light)
- Tempered glass lens
- 10-hour run time, low battery indicator
- Lightweight aluminum 120° rotating head
- Impact modified nylon housing resists automotive fluids
- Ni-Cad light 14.4V/18V slide-on batteries

CTLZ761 Flashlight
- 200 lumens output
- Low battery indicator (10 minutes)
- 4-hour run time
- Tempered glass lens
- Resists automotive fluids
- Impact modified nylon housing
- Uses CTB8172 14.4V MicroLithium™ Battery and CTC772 Charger

CTL761 Flashlight
- 200 lumens
- Low battery indicator
- 4-hour run time
- 120° rotating head
- Aluminum head
- Works with CTB6172, CTB7122 and CTB8172 batteries

CTLU761 Rechargeable LED Light
- 540 lumens, ultra bright light output
- 60 LED bulbs
- Includes hook with pad for hanging
- High impact housing and light tube
- 10-minute low battery indicator
- Works with CTB6172, CTB7172 and CTB8172 batteries

CTLUH761 Rechargeable Underhood LED Light
- 800 lumens, ultra bright light output
- 90 LED bulbs
- Expandable 81" clamp to position light at work area
- Ideal for underhook, undercarriage and over dash applications
- Includes hook with peg for hanging
- High impact housing and light tube
- 10-minute low battery indicator
- Works with CTB6172, CTB7172 and CTB8172 batteries

CTLED566A Flashlight
- Features six bright LED bulbs to illuminate the work area
- Durable glass filled nylon housing holds up in tough environments
- Works with CTB5172 and CTB5196 batteries

CE– DE, ES, FR, IT, GB, NL, JP
Battery and charger sold separately

⚠WARNING

- Use only impact sockets and accessories with impact wrenches
- Read safety precautions on pages W1 to W4

POWER MANAGEMENT

CTMS8850
(battery sold separately)

CTI8850
(battery sold separately)

Memory Savers/Power Inverters

CTMS8850 18V Memory Saver
- 12V DC 4A output
- 5V 1A USB output
- Audible battery level notification
- Four-hour run time, 12V at 1A
- One-hour run time, 12V at 4A
- Flexible swivel head
- Protective external fuse

CTI8850 18V Power Inverter
- 175 Watts Continious Output
- 120 Volt AC Adaptor
- 5V 1A USB Output
- Overload, short Circuit and Battery Voltage Protection
- Flexible Swivel Head
- Protective Internal Fuse and Cooling Fan

CTUSB8850

CTUSB761
(battery sold separately)

USB Power Units

CTUSB8850 18V USB Power Unit
- Four-port USB charging device
- 5V output at 2A, 1A, 0.5A (two each)
- Protective sliding doors
- LED indicator for state of charge
- Ratcheting mountable USB head
- One-hour run time with CTB8185 battery

CTUSB761 14.4V USB Power Unit
- 5V 1A output
- 1A output for two hours
- Compatible with CTB9172, CTB7122 and CTB8172
- LED power indicator
- USB protecctive sliding cover
- Easy on/off switch

CTB8172

CTB8185

CTB5196

18V Lithium Batteries

- 50% more run time, 36% lighter, 50% more life than Ni-Cad batteries
- 4.0 Ah high capacity cells
- No self discharge
- Four LED fuel gauge indicates battery charge and condition

14.4V and 18V Ni-Cad Batteries

- 2.5 Ah high capacity cells for long life
- No memory effect for maximum charging
- Glass filled nylon housing for durability 14.4V Lithium Batteries
- 50% more run time than Ni-Cad batteries
- 2.0 Ah high capacity cells
- Thermostat protects battery from overheating

9.6V Ni-Cad Batteries

- .7 Ah high capacity cells
- No memory effect for maximum charging

Batteries

Stock No.	Type	Voltage	Style	Charge Time (minutes)	Use with
CTBS196†	Ni-Cad	9.6	Tower	55	CTS596, CT595, CT596QC, CT595
CTB3092†	Ni-Cad	9.6	Tower	45	CT30, CDR20, lights
CTB312†	Ni-Cad	12	Tower	45	CDR30, CT310, CT350, lights
CTB3124†	Ni-Cad	12	Tower	45	CDR30, CT310, CT350, lights
CTB314†	Ni-Cad	14.4	Tower	45	CDR40, CDR45, CT3450, lights
CTB4147†	Ni-Cad	14.4	Slide-on	40	CDR4450 CT4110, CT4450, lights
CTB3187†	Ni-Cad	18	Tower	40	CDR3850, CT3850, lights
CTB4187†	Ni-Cad	18	Slide-on	40	CDR4850, CDR4850A, CDR6850, CGG4850, CT4850, CT4850HO, CT6850, CTRS4850, CTRS6850, lights
CTB8185†	Lithium Ion	18	Slide-on	30	CT8850 series, CT8815 series, CT8810 series
CTB6172†	Lithium	7.2	Tower	30	CT661, CTS661, CT661QC, CT625, CTL761, CT7850 series
CTB8172†	Lithium Ion	14.4	Tower	55	CDR761, CTL761, CLTZ761, CTLU761, CTLUH761

†CE

CTC720

CTC728

CTC772

Chargers

Stock No.	Type	Application
CTC572†	7.2V Ni-Cad Charger	Charges all 7.2V Ni-Cad batteries
CTC578†	7.2V DC Mobile Charger	Charges all 7.2V Ni-Cad batteries
CTC596	9.6V Ni-Cad Charger	All 9.6V Ni-Cad batteries
CTC420†	Multivolt Ni-Cad Charger	Charges all 9.6V, 14.4V and 18V Ni-Cad slide-on or tower style batteries
CTC620†	Dual Chemistry Charger	Charges all 14.4V / 18V Ni-Cad or Lithium slide-on style batteries
CTC628†	12V DC Dual Chemistry Mobile Charger	Charges all 14.4V / 18V Ni-Cad or Lithium slide-on style batteries
CTC720†	18V Lithium Charger	Charges CT7850 series products, CDR7850H, CTL7850, CT7850
CTC728†	12V DC Lithium Mobile Charger	Charges CT7850 series products, CDR7850H, CTL7850
CTC772†	3.0A 7.2V/14.4V Lithium Charger	All 14.4V and 7.2V MicroLithium™ batteries

†CE

WARNING • Read safety precautions on pages W1 to W4

CORDLESS: SCREWDRIVER ACCESSORIES

CTEXTSET

CTS561BITSET

CTS561HOLSTER

CTS561CHUCK

Screwdriver Accessories

CTEXTSET Quick Change Extension Set
- Includes: CTEXT6 and CTEXT12 quick change extensions plus a T15 TORX® bit (1/4" shank) and a Phillips® bit (power groove hex shank)
- Ideal companion to the CTS series screwdrivers where extended reach is needed

CTS561BITSET Quick Change Bit Set
- For Snap-on® CTS series cordless screwdrivers plus other power drivers
- Quick change hex saves time changing bits
- Includes 22 bits (all 3" long) plus a 1/4" square drive (2" long)
- Storage case included

CTS561HOLSTR Bit Holster
- Holster for CTS series cordless screwdrivers
- Includes three flat tip bits (3/16", 7/32", 1/4"), three *Phillips* bits (#0, #1, #2) and two *TORX* bits (T15, T25)

CTS561CHUCK Quick Change Keyless Drill Chuck (1/4")
- 1/4" Hex shank for fast change-over
- Compact size improves access and visibility of drilling surface
- 1/4" chuck capacity provides convenience for small jobs
- 1/32"–1/4" drill capacity
- Use for light duty, small holes in metal and wood

ELECTRIC: POLISHER/ENGRAVER

ETB1580B

ETB1650A

Polisher

ETB1580B Polisher (Blue-Point®)
- Six-position speed setting allows user to dial in desired speed
- Variable-speed trigger lets user vary the speed within the range and have control over polishing speed
- Push button spindle lock for quick and easy pad changes
- Polish and detail autos, trucks and boats

Impact Wrench

ETB1650A Electric Impact Wrench (1/2" Square Drive) *(Blue-Point)*
- 8.5A motor delivers a powerful 350 ft-lb of torque
- Heavy duty 16-gauge electrical cord – resists oil
- Forward-reverse toggle switch – for fast, easy rotation selection
- Double-blow molded case protects your investment while transporting it
- ETL certification
- Remove/install auto and light truck fasteners in professional garages, scrap yards or for use at home

GA236C

Engraver

GA236C Engraver *(Blue-Point)*
- Marks all materials
- Includes 3 mm tungsten carbide tip
- Nine-position stroke adjustment to control engraving depth

GA236-32 Diamond Tip
- Optional heavy duty tip

Australia	Charger	Stock No.	Stock No.
Chargers:	Dual Chemistry Charger	**CTCFA620†** charges CTB4147, CTB4187 Ni-Cad or CTB6185, CTB6187 Lithium	—
	Multi-Volt Ni-Cad Charger	**CTCFA420†** charges CTB3092, CTB312, CTB3124, CTB314, CTB3187, CTB4147, CTB4187 Ni-Cad	—
	Lithium Charger	—	**CTCA720†** charges CTB7185/CTB8185 Lithium
	7.2V Charger Lithium also does 14.4V	**CTCA572†** charges CTB5172* Ni-Cad	**CTCA772** charges CTB6172, CTB7172 and CTB8172 Lithium
	9.6V Charger	**CTCA596†** charges CTB5196 Ni-Cad	—
Australia	**Tool**	**Ni-Cad Version**	**Lithium Version**
Tools:	18V Impact Wrench	**CTA6818†**	**CTA8850†**
	18V Drill	**CDRA6850†**	—
	18V Hammer Drill	—	**CDRA8850H†** Lithium
	18V Reciprocating Saw	**CTRSA6850†**	**CTRSA8850†**
	14.4V Impact Wrench	**CTA4418†**	**CTA761†** 3/8" **CTA725†** 1/4"
	14.4V Drill	**CDRA4450†**	**CDRA761A†**
	14.4V Screwdriver	—	**CTSA725†** **CTSA761†**
	9.6V Impact Wrench	**CTA596†** 3/8" **CTA595†** 1/4"	—
	9.6V Screwdriver	**CTSA596†**	—

United Kingdom	Charger	Stock No.	Stock No.
Chargers:	Dual Chemistry Charger	**CTCFU620†** charges CTB4147, CTB4187 Ni-Cad or CTB6185, CTB6187 Lithium	—
	Multi-Volt Ni-Cad Charger	**CTCFU4208†** charges CTB3092, CTB312, CTB3124, CTB314, CTB3187, CTB4147, CTB4187 Ni-Cad	—
	Lithium Charger	—	**CTCU7208†** charges CTB7185/CTB8185 Lithium
	7.2V Charger Lithium also does 14.4V	**CTCU572†** charges CTB5172 Ni-Cad	**CTCEU772†** charges CTB6172, CTB7172 and CTB8172 Lithium
	9.6V Charger	**CTCU596†** charges CTB5196 Ni-Cad	—
United Kingdom	**Tool**	**Ni-Cad Version**	**Lithium Version**
Tools:	18V Impact Wrench	**CTU68188†**	**CTU8850†**
	18V Drill	**CDRU6850†**	—
	18V Hammer Drill	—	**CDREU8850H†** Lithium
	18V Reciprocating Saw	**CTRSU6850†**	**CTRSEU8850†**
	14.4V Impact Wrench	**CTEU4418†**	**CTEU761†** 3/8" **CTEU725†** 1/4"
	14.4V Drill	**CDRU4450†**	**CDREU761A***
	14.4V Screwdriver	—	**CTSEU725†** **CTSEU761†**
	9.6V Impact Wrench	**CTU596†** 3/8" **CTU595†** 1/4"	—
	9.6V Screwdriver	**CTSEU596†**	—

†CE

WARNING

- Use only impact sockets and accessories with impact wrenches
- Read safety precautions on pages W1 to W4

CORDLESS: INTERNATIONAL PRODUCT

Europe	Charger	Stock No.	Stock No.
Chargers:	Dual Chemistry Charger	**CTCFE620*** charges CTB4147, CTB4187 Ni-Cad or CTB6185, CTB6187 Lithium	
	Multivolt Ni-Cad Charger	**CTCFE420*** charges CTB3092, CTB312, CTB3124, CTB314, CTB3187, CTB4147, CTB4187 Ni-Cad	
	Lithium Charger		**CTCE720*** charges CTB7185/CTB8185 Lithium
	7.2V Charger Lithium also does 14.4V	**CTCE572*** charges CTB5172 Ni-Cad	**CTCEU772*** charges CTB6172, CTB7172 and CTB8172 Lithium
	9.6V Charger	**CTCE596*** charges CTB5196 Ni-Cad	
Europe	**Tool**	**Ni-Cad Version**	**Lithium Version**
Tools:	18V Impact Wrench	**CTE6818***	**CTCEU8850***
	18V Drill	**CDRE6850***	—
	18V Hammer Drill	—	**CDRE8850H*** Lithium
	18V Reciprocating Saw	**CTRSE6850***	**CTRSEU8850***
	14.4V Impact Wrench	**CTE4418***	**CTEU761*** 3/8" **CTEU725*** 1/4"
	14.4V Drill	**CDRE4450***	**CDREU761A***
	14.4V Screwdriver	—	**CTSEU725*** **CTSEU761***
	9.6V Impact Wrench	**CTE596*** 3/8" **CTE595*** 1/4"	
	9.6V Screwdriver	**CTSEU596***	

Japan	Charger	Stock No.	Stock No.
Chargers:	Dual Chemistry Charger	**CTCJ620*** charges CTB4147, CTB4187 Ni-Cad or CTB6185, CTB6187 Lithium	
	Multivolt Ni-Cad Charger	**CTCJ420*** charges CTB3092, CTB312, CTB3124, CTB314, CTB3187, CTB4147, CTB4187 Ni-Cad	
	Lithium Charger		**CTCJ720*** charges CTB7185/CTB8185 Lithium
	7.2V Charger Lithium also does 14.4V	**CTCJ572*** charges CTB5172 Ni-Cad	**CTCJ772*** charges CTB6172, CTB7172 and CTB8172 Lithium
	9.6V Charger	**CTCJ596*** charges CTB5196 Ni-Cad	
Japan	**Tool**	**Ni-Cad Version**	**Lithium Version**
Tools:	18V Impact Wrench	**CTJ6818***	**CTJ8850***
	18V Drill	**CDRJ6850***	—
	18V Hammer Drill	—	**CDRJ8850H*** Lithium
	18V Reciprocating Saw	**CTRSJ6850***	**CTRSJ8850***
	14.4V Impact Wrench	**CTJ4418***	—
	14.4V Drill	**CDRJ4450***	—
	14.4V Screwdriver	—	**CTSJ725*** **CTSJ761***
	9.6V Impact Wrench	**CTJ596*** 3/8" **CTJ595*** 1/4"	
	9.6V Screwdriver	**CTSJ596***	

All Countries	Charger	Stock No.	Application
Chargers:	12V DC Mobile Charger	**CTC628***	Charges CTB4147, CTB4187 Ni-Cad or CTB6185, CTB6187 Lithium
	7.2V DC Mobile Charger	**CTC578***	Charges CTCA572, CTB5172 Ni-Cad
	12V DC Mobile Charger	**CTC728***	Charges CTB7185/CTB8185 Lithium slide-on style batteries

*CE

LIGHTWEIGHT. ERGONOMIC. POWERFUL. IT'S AIR TOOL SUPERIORITY.

Snap-on has taken air to new heights. By fitting heavy-duty components into smaller places for more power with less weight.

POWER, MEET SPEED.
SPEED, MEET POWER.

Get the best of both worlds – big torque and high-speed – compliments of Snap-on state-of-the-art innovation.

Twin Hammer Impact Mechanisms — Unique hammer design results in more power per blow.

Impact Mechanism — More vanes in the rotor means smoother power transfer to the impact mechanism and less power lost in the motor.

EASY DOES IT. EVERY TIME.

Air tools that make your job easy, and do the job right.

Better Balance — For more user control.

Compact Nose Designs — Access tight spaces with ease.

ENDURING DURABILITY.

Heavy-duty, wear-and-tear-resistant components are built into every Snap-on® air tool — and into our DNA.

Oil-Bath Lubrication — Unique technology keeps internal components continuously lubricated for smooth operation and longer tool life.

ERGONOMIC DESIGN.

Snap-on air tools feel natural — so you can work more comfortably.

Reduced Vibration — Smooth-flowing motors and shock absorption reduce the stress from vibration.

Tip-Valve Trigger — For an intuitive flow of power from user to tool.

AIR: QUICK REFERENCE

Impact Wrenches

Stock No.	Drive Size, inches (mm)	Max. Torque, ft-lb (N•m)	Free Speed RPM	Blows Per Minute	Air Consumption, Free Speed, CFM (SCFM) [l/min]	Vibration Level, m/s²	Sound Level dB(A) Pressure	Length, inches (mm)	Weight, lb (kg)
IM1800 †	1 (25)	1,800 (2,440)	5,500	900	6.7 (48) [190]	8.6	104	14 (356)	15.2 (6.8)
IM1800L †	1 (25)	1,800 (2,440)	5,500	900	6.7 (48) [190]	8.6	104	20 (508)	16 (7.3)
AT1300A †	1 (25)	3,000 (4,067)	4,000	505	5.3 (38) [150]	4.4	103	21 (533)	25.6 (11.6)
AT1300AL †	1 (25)	2,700 (3,661)	4,000	505	5.3 (38) [150]	4.4	103	27 (686)	28 (12.7)
MG1250 †	3/4 (19)	1,200 (1,627)	6,200	1,050	6.4 (46) [181]	10.38	99.8	8 (203)	8.1 (3.7)
MG1250L †	3/4 (19)	1,200 (1,627)	6,200	1,050	6.4 (46) [181]	10.38	99.8	10 (254)	9 (4.09)
MG1250XL †	3/4 (19)	1,200 (1,627)	6,200	1,050	6.4 (46) [181]	10.38	99.8	13 (330)	10 (4.5)
MG1250P †	3/4 (19)	1,200 (1,627)	6,200	1,050	6.4 (46) [181]	10.38	99.8	8 (203)	8 (3.6)
AT670 †	3/4 (19)	1,050 (1,423)	6,700 (F), 6,900 (R)	1,050	5.6 (40) [159]	2.44	114.4	8.5 (215)	7.5 (3.44)
AT670L †	3/4 (19)	1,050 (1,423)	6,700 (F), 6,900 (R)	1,050	5.6 (40) [159]	2.44	114.4	13.5 (343)	8.8 (4)
MG725 †	1/2 (13)	810 (1,098)	9,800	1,270	4.0 (29) [113]	6.6	99.9	7.7 (194)	4.8 (2.2)
MG725L †	1/2 (13)	810 (1,094)	9,800	1,270	4.0 (29) [113]	6.6	99.9	9.7 (245)	5.0 (2.3)
MG725P †	1/2 (13)	810 (1,094)	9,800	1,270	4.0 (29) [113]	6.6	99.9	7.7 (194)	4.8 (2.2)
AT570 †	1/2 (13)	570 (773)	6,900 (F), 7,000 (R)	1,050	5.0 (36) [142] (F), 5.3 (38) [150] (R)	6.08	95	7.24 (184)	4.08 (1.87)
AT5500 †	1/2 (13)	550 (745)	7,400	1,200	4.2 (30) [118.9]	4.0	94	7.9 (20)	6.4 (2.9)
MG3255 †	1/2 (13)	325 (440)	10,700	1,400	4 (28) [113]	4.5	99.1	6.1 (155)	2.8 (1.3)
MG3255L †	1/2 (13)	325 (440)	10,700	1,400	4 (28) [113]	4.5	99.1	7.6 (193)	2.9 (1.3)
MG3255P †	1/2 (13)	325 (440)	10,700	1,400	4 (28) [113]	4.5	99.1	6.1 (162)	2.8 (1.3)
MG3255LP †	1/2 (13)	325 (440)	10,700	1,400	4 (28) [113]	4.5	99.1	7.6 (193)	2.9 (1.3)
MG325 †	3/8 (10)	325 (440)	10,700	1,400	4 (28) [113]	4.5	99.1	6.1 (155)	2.8 (1.3)
MG325P †	3/8 (10)	325 (440)	10,700	1,400	4 (28) [113]	4.5	99.1	6.1 (155)	2.8 (1.3)
AT380A †	3/8 (10)	175 (230)	8,700	1,680	3.9 (28) [111]	3.5	94	6.5 (165)	3.0 (1.36)
AT370 †	3/8 (10)	320 (434)	10,000 (F), 11,000 (R)	1,050	4.4 (326) [125] (F), 4.7 (34) [133] (R)	3.25	92	6.3 (160)	2.62 (1.19)
AT351 †	3/8 (10)	175 (237)	9,700	1,200	2.5 (18) [71]	3.09	109.2	7.6 (194)	2.5 (1.2)
AT235MCA †	1/4 (6)	25 (34)	13,000	2,900	1.67 (12) [47]	<2.5	95.1	6.2 (158)	1.4 (.64)

Ratchets

Stock No.	Drive Size, inches (mm)	Torque Range, ft-lb (N•m)	Free Speed RPM	Air Consumption, Free Speed, CFM (SCFM) [l/min]	Vibration Level, m/s²	Sound Pressure Level, dB(A)	Length, inches (mm)	Weight, lb (kg)
AT705B †	1/2 (13)	5–50 (6–68)	150	3.0 (22) [85]	8.7	89	10.7 (273)	2.5 (1.14)
AT700F †	3/8 (10)	5–60 (6–81)	165	3.0 (22) [85]	8.7	89	10.1 (257)	2.5 (1.14)
FAR72C †	3/8 (10)	5–60 (7–61)	225	4.5 (32) [127]	5.3	93.6	11.8 (300)	3.1 (1.4)
FAR7200 †	3/8 (10)	5–70 (7–95) (open mode), 5–50 (7–67) (quiet mode)	260 (open mode), 200 (quiet mode)	4.5 (32) [127]	5.2	94.9 (open mode), 87.9 (quiet mode)	12.1 (308)	3.1 (1.4)
FAR7000 †	3/8 (10)	0–30 (0–41)	410	2.6 (18.6) [73.6]	9.0	91.4	11.2 (284.5)	2.08 (0.94)
FAR2505 †	3/8 (10)	0–35 (0–47)	225	1.7 (11) [48]	2.5	84	7.8 (198)	1.4 (.6)
FAR2500 †	1/4 (6)	0–35 (0–47)	225	1.7 (11) [48]	2.5	84	7.8 (197)	1.4 (.6)
FAR25A †	1/4 (6)	5–25 (7–28)	200	1.4 (10) [40]	0.5	87.4	6.7 (171)	1.3 (5
AT200D †	1/4 (6)	5–25 (6–34)	230	1.4 (10)[40]	3.3	85	8.7 (222)	1.1 (.50)
AT204A †	1/4 (6)	—	350	3.5 (25) [99]	3.6	94	5.12 (130)	1.05 (.48)

Drills

Stock No.	Chuck Size, inches (mm)	Rated Power, HP (kW)	Torque Range, in-lb (N•m)	Free Speed RPM	Air Consumption, Free Speed, CFM (SCFM) [l/min]	Vibration Level, m/s²	Sound Level dB(A) Pressure	Length, inches (mm)	Weight, lb (kg)
PDR5000A †	1/2 (13)	0.45 (.33)	0–300 (0–34)	450	3.8 (27) [108]	0.9	82.6	8.7 (222)	3 (1.3)
AT5000 †	1/2 (13)	0.45 (.33)	0–120 (0–14)	490	3.8 (27) [108]	<2.5	82	9 (229)	3.8 (1.7)
PDR3000A †	3/8 (10)	0.45 (.33)	0–50 (0–6.0)	2,500	3.5 (25) [99]	3.0	79.7	7 (178)	2.5 (1.1)
AT3000 †	3/8 (10)	0.45 (.33)	0–40 (0–4.5)	1,675	3.5 (25) [95]	<2.5	82	7.6 (194)	3.2 (1.4)
AT811 †	3/8 (10)	0.25 (.19)	0–55 (0–6)	1,320	3.4 (24) [95]	<.8	110	8.2 (208)	2.5 (1.1)
AT184 †	5/16 (8)	0.32 (.65)	—	0–1,000/ 0–1,800	8.4 (60) [238]	<1.0	84	7.9 (201)	3.1 (1.4)
AT801MCA †	1/4 (6)	0.25 (.19)	0–18 (0–2.0)	1,800	1.9 (13.6) [53.8]	<2.5	96.4	7.2 (183)	1.5 (0.68)

Hammers

Stock No.	Bore Diameter, inches (mm)	Blows Per Minute	Piston Stroke, inches (mm)	Shank Opening, inches (mm)	Air Consumption, Free Speed, CFM (SCFM) [l/min]	Vibration Level, m/s²	Sound Level dB(A) Pressure	Length, inches (mm)	Weight, lb (kg)
PH3050B †	3/4 (19)	2,500	3 (76)	0.401 (10.1)	1.8 (13) [51]	1.5	91.4	9.0 (228)	5.9 (2.7)
AT2050 †	3/4 (19)	3,400	2.75 (70)	0.401 (10.1)	2.5 (18) [71]	3.0	99	7.4 (187)	4.6 (2.1)

† CE

Die Grinders

Stock No.	Collet Size, inches	Rated Power, HP (kW)	Free Speed RPM	Air Consumption, Free Speed, CFM (SCFM) [l/min]	Vibration Level, m/s²	Sound Level dB(A) Pressure	Length, inches (mm)	Weight, lb (kg)
PT100A †	1/4	0.3 (.2)	20,000	1.7 (11) [48]	3.2	83.3	6.1 (155)	1 (0.4)
PT110A †	1/4	0.3 (.2)	25,000	1.7 (11) [48]	6.3	85.9	5.75 (146)	1.2 (0.5)
PT200A †	1/4	0.5 (.3)	22,000	3.2 (23) [90]	2	85.1	6.9 (175)	1.2 (0.5)
PT210A †	1/4	0.5 (.3)	20,000	3.2 (23) [90]	5.2	86	6.4 (162)	1.4 (.63)
PT200AL †	1/4	0.5 (.3)	22,000	3.2 (23) [90]	3	85.9	10.9 (276)	2.1 (.95)
PT400 †	1/4	1.0 (.6)	25,000	4.17 (30) [118]	2.1	84.7	7.5 (190)	1.5 (.68)
PT410 †	1/4	1.0 (.6)	12,000	4.17 (30) [118]	.78	81.8	7.5 (190)	2.0 (.91)
PT400L †	1/4	1.0 (.6)	23,000	4.17 (30) [118]	3.25	82.2	12.25 (311)	2.6 (1.1)
AT115 †	1/4	0.45 (.33)	22,000	4 (29) [113]	<2.5	95	6.5 (165)	1.3 (.61)
AT118 †	1/4	0.2 (.15)	20,000	4.0 (29) [113]	2.5	93	5.5 (140)	1.1 (.50)
AT105 †	1/4	0.45 (.33)	22,000	4 (29) [113]	<2.5	102	6.5 (165)	1.3 (.61)
AT109* †	1/4	0.2 (.15)	20,000	2.1 (15) [59]	2.5	93	5.5 (140)	1.1 (.50)
AT119 †	1/4	0.2 (.15)	20,000	3 (15) [59]	<6.92	100	6.81 (173)	1.1 (50)
AT116 †	1/4	0.2 (.15)	20,000	3 (15) [59]	3	100	6.5 (165)	1.1 (50)
AT120L †	1/4 (6.35 mm)	0.22 (.164)	23,000	3.0 (22)	1.83	77	11.02 (280)	1.45 (.66)
AT120LRA †	1/4 (6.35 mm)	0.45 (.335)	18,000	3.3 (24) [93.4]	1.83	79	11.25 (285)	1.63 (.74)
AT1070A †	1/8	—	75,000	1 (7) [28]	2.0	72	5.3 (135)	.55 (0.25)
AT1070RA †	1/8	—	75,000	1 (7) [28]	2.0	72	5.9 (150)	.46 (0.21)

*See p.485 for AT109DGK Die Grinder Kit specifications.

† CE

Grinders

Stock No.	Wheel Size, inches (mm)	Rated Power, HP (kW)	Free Speed RPM	Air Consumption, Free Speed, CFM (SCFM) [l/min]	Vibration Level, m/s²	Sound Level dB(A) Pressure	Length, inches (mm)	Weight, lb (kg)
PT450 †	4 1/2 (114)	1.0	12,000	4.17 (30) [118]	8.9	86.3	9 (229)	3.25 (1.47)
AT415B* †	4 1/2 (114)	0.86 (.64)	12,000	3.2 (23) [91]	5.1	87	10 (254)	4.2 (1.9)

*Blue-Point®

Cutting Tools

Stock No.	Wheel Size, inches (mm)	Rated Power, hp (kW)	Free Speed RPM	Air Consumption, Free Speed, CFM (SCFM) [l/min]	Vibration Level, m/s²	Sound Level dB(A) Pressure	Length, inches (mm)	Weight, lb (kg)
PT250A †	3 (76)	0.5 (.37)	22,000	3.2 (23) [90]	6	86.1	7.2 (183)	1.6 (.73)
PT430 †	3 (76)	1.0 (0.75)	25,000	4.17 (30) [118]	6.92	87	7.5 (190)	1.9 (.86)
PT490 †	4 (102)	1.0 (0.75)	12,000	4.17 (30) [118]	3.41	87.8	9.3 (236)	3.5 (1.6)
AT154RA* †	4 (102)	0.7 (0.5)	13,000	3.1 (22) [87]	3.07	85	14.3 (365)	3.3 (1.5)
AT157R* †	3 (76)	0.45 (.33)	20,000	3.5 (25) [99]	<3.8	100	7.3 (185)	1.9 (.86)
AT153 †	3 (76)	0.5 (0.37)	17,000	3.5 (24) [99.1]	<2.86	85	7.3 (185)	3.3 (1.5)

Blue-Point

Air Saws

Stock No.	Free Speed SPM	Air Consumption, Free Speed, CFM (SCFM) [l/min]	Vibration Level, m/s²	Sound Level dB(A) Pressure	Length, inches (mm)	Weight, lb (kg)
PTS500 †	9,500	1.1 (8.5) [33.9]	3.68	90.7	7.8 (198)	1 (0.45)
PTS1000 †	10,000	1.0 (8.5) [33.9]	2.99	87.1	9.4 (238)	1.5 (0.69)
AT192A †	11,000	1.0 (7) [28]	10.1	82.0	9.3 (235)	1.75 (0.80)
AT194A †	8,250	0.7 (5) [20]	<6.6	87	6.7 (175)	1 (0.45)

† CE

Finishing Tools

Stock No.	Pad Size, inches (mm)	Style	Rated Power, HP (kW)	Free Speed RPM	Spindle Thread, inches	Air Consumption, Free Speed, CFM (SCFM) [l/min]	Vibration Level, m/s²	Sound Level dB(A) Pressure	Length, inches (mm)	Weight, lb (kg)
PS4512 †	5 (127)	Orbital	0.25 (.19)	12,000	5/16–24	2 (14) [57]	2.3	75.3	5 (127)	1.7 (0.77)
PS4612 †	6 (152)	Orbital	0.25 (.19)	12,000	5/16–24	2 (14) [57]	2.3	75.3	6 (152)	2.5 (1.14)
PSF4612 †	6 (152)	Orbital Finishing	0.25 (.19)	12,000	5/16–24	2 (14) [57]	2.1	74.9	6 (152)	2.4 (1.11)
PSF4312 †	3 (76)	Orbital Finishing	0.25 (.19)	12,000	1/4–20	2 (14) [57]	2.1	74.9	3 (76)	1.44 (0.65)
PS4609 †	6 (152)	Geared (NV)	0.42 (.33)	1,000	3/8	3 (21.7) [85]	5.9	80	11 (281)	3.7 (1.70)
PS4609V	6 (152)	Geared (V)	0.42 (.33)	1,000	3/8	3 (21.7) [85]	5.9	80	11 (281)	3.7 (1.70)
PS4809 †	8 (203)	Geared (NV)	0.42 (.33)	1,000	3/8	3 (21.7) [85]	5.9	80	11 (281)	4 (1.82)
PS4809V	8 (203)	Geared (V)	0.42 (.33)	1,000	3/8	3 (21.7) [85]	5.9	80	11 (281)	4 (1.82)
AT408 †	8 (203)	Geared (NV)	0.5 (.37)	850	5/16–24	5 (36) [142]	3.7	87	11 (281)	4.8 (2.18)
AT411A †	6 (152)	Dual Action	0.5 (.37)	10,000	5/16–18 UNC	5 (36) [142]	3.7	79	8 (203)	4.7 (2.14)
AT425R †	5 (127)	Reversible Hi-speed	0.45 (.33)	13,000	7/16–20 UNC	4.3 (31) [122]	<0.8	93	5.3 (135)	2.8 (1.28)
AT406C	6 (152)	Orbital	0.25 (.19)	12,000	5/16–24	2.5 (18) [71]	2.8	85	8.6 (21.9)	1.5 (0.7)
AT475A †	2 3/4 x 17 1/2	Inline	—	1,800	—	2.3 (17) [65]	14.9	87	16 (406)	6.8 (3.09)
AT401MCA †	3 (76)	Micro Surface Prep	0.25 (.19)	15,000	1/4–20	2.1 (15) [59]	<2.5	84	4.7 (119)	0.97 (0.44)
AT402MCA †	3 (76)	Micro Sander	0.25 (.19)	15,000	5/16–24 UNF	2.1 (15) [59]	<2.5	84	5.2 (133)	1.1 (.50)
AT403MCA †	3 (76.2)	Micro Polisher	0.25 (.19)	6,000	5/16–24 UNF	2.2 (16) [62]	<2.5	86	5.6 (143)	1.3 (0.60)
AT450CP †	7 (177)	Vertical Polisher	0.5 (.37)	2,500	5/8–11	3.31 (23.8) [93.72]	<2.5	87	15 (381)	5 (2.27)
PT280THUGA †	—	Material Removal Tool	0.45 (.33)	3,500	—	4 (28) [113]	2.8	85	12 (304)	2.4 (1.09)

† CE

⚠WARNING

• Read and follow safety messages for each type of Air Tool on the following pages and the safety precautions on pages W1 to W4

AIR: 1", 3/4" DRIVE IMPACT WRENCHES

IM1800

MG1250

Thru-Hole Anvil (P)



3" Long Anvil (L)

6" Extra Long Anvil (XL)

6" Long Anvil (L)

Super Duty Air Impact Wrenches

IM1800 Series 1" Drive

- Convenient D-handle and side handle for less user fatigue
- Lightweight aluminum housing and nose for better balance
- Standard and long anvils are thru-hole design for positive socket retention
- Three-position speed control and full power reverse have more control when tightening or removing fasteners
- Twin hammer mechanism is durable and hard hitting
- Sealed in oil bath lubrication keeps impact mechanism lubricated for less wear and longer tool life

MG1250 Series 3/4" Square Drive

- One piece magnesium housing assures precision alignment of components and reduces vibration
- Continuous oil-bath lubrication reduces wear and increases life
- Twin-hammer mechanism delivers hard-hitting blows with fewer moving parts for longer tool life
- Six-vane rotor delivers maximum torque and speed to remove stubborn fasteners
- Cushion-grip variable-speed trigger reduces user fatigue
- Balanced design distributes weight evenly to increase control
- Anvil stops with release of the trigger to prevent throwing fasteners
- One-hand reverse button for easy operation

Specifications	IM1800 †	IM1800L †	MG1250 †	MG1250L †	MG1250XL †	MG1250P †
Drive Size, inches (mm)	1 (25)	1 (25)	3/4 (19)	3/4 (19)	3/4 (19)	3/4 (19)
Max. Torque, ft-lb (N•m)	1,800 (2,440)	1,800 (2,440)	1,250 (1,694)	1,250 (1,694)	1,250 (1,694)	1,250 (1,694)
Free Speed RPM	5,500	5,500	6,200	6,200	6,200	6,200
Blows Per Minute	900	900	1,050	1,050	1,050	1,050
Extended Anvil Length, inches (mm)	—	6 (152)	—	3 (76)	6 (152)	—
Anvil Type	Friction Ring w/ Thru Hole	Thru Hole	Friction Ring	Friction Ring w/ Thru Hole	Friction Ring w/ Thru Hole	Thru Hole
Air Consumption, Free Speed, CFM (SCFM) [l/min]	8.6 (62) [244]	8.6 (62) [244]	6.4 (46) [181]	6.4 (46) [181]	6.4 (46) [181]	6.4 (46) [181]
Air Inlet Thread Size	1/2"-14 NPT	1/2"-14 NPT	3/8"-18 NPT	3/8"-18 NPT	3/8"-18 NPT	3/8"-18 NPT
Recommended Hose Size, inches (mm)	1/2" (13)	1/2" (13)	3/8" (10)	3/8" (10)	3/8" (10)	3/8" (10)
Vibration Level, m/s²	8.6	8.6	10.38	10.38	10.38	10.38
Sound Level dB(A) Pressure	104	104	99.8	99.8	99.8	99.8
Length, inches (mm)	14 (356)	20 (508)	8 (203)	10.5 (266)	14.5 (368)	8 (203)
Weight, lb (kg)	15.2 (7)	16 (7.3)	8.1 (3.7)	8.6 (3.99)	9.5 (4.1)	8.1 (3.6)
Vinyl Boot (included)	—	—	MG1200BOOT	MG1200BOOT	MG1200BOOT	MG1200BOOT

Impact wrench suffix: P = Pinned anvil, L = Long anvil, XL = Extra long anvil. Standard anvil for applications where frequent socket change is required. Pinned anvil for high torque applications where socket security is a priority. Long or Extra long anvil for tight applications that require extra reach.

† CE

AT1300A

6" Long Anvil (L)

AT670



6" Long Anvil (L)

Heavy Duty Air Impact Wrenches

AT1300A Series 1" Drive

- Workhorse performance for use on trucks, buses and heavy equipment
- Steel nose for rugged, demanding applications
- Pin clutch style impact mechanism for fast startup and high torque requirements
- Thru-hole anvil

AT670 Series 3/4" Drive

- Lightweight composite housing with aluminum nose
- Three-position thumb operated forward/reverse lever
- Bottom handle exhaust
- Twin hammer mechanism

Specifications	AT1300A †	AT1300AL †	AT670 †	AT670L †
Drive Size, inches (mm)	1 (25)	1 (25)	3/4 (19)	3/4 (19)
Max. Torque, ft-lb (N•m)	3,000 (4,067)	2,700 (3,661)	1,050 (1,423)	1,050 (1,423)
Free Speed RPM	4,000	4,000	6,700 (F), 6,900 (R)	6,700 (F), 6,900 (R)
Blows Per Minute	505	505	1,050	1,050
Extended Anvil Length, inches (mm)	—	6 (152)	—	6 (152)
Anvil Type	Friction Ring w/ Thru Hole	Friction Ring w/ Thru Hole	Friction Ring	Friction Ring
Air Consumption, Free Speed, CFM (SCFM) [l/min]	5.3 (38) [150]	5.3 (38) [150]	5.6 (40) [159]	5.6 (40) [159]
Air Inlet Thread Size	1/2"-14 NPT	1/2"-14 NPT	3/8"-18 NPT	3/8"-18 NPT
Recommended Hose Size, inches (mm)	1/2" (13) ID min.	1/2" (13) ID min.	3/8" (10) ID min.	3/8" (10) ID min.
Vibration Level, m/s²	4.4	4.4	2.44	2.44
Sound Level dB(A) Pressure	103	103	99	99
Length, inches (mm)	21 (533)	27 (686)	8.5 (215)	13.5 (343)
Weight, lb (kg)	25.6 (11.6)	28 (12.7)	7.5 (3.44)	8.8 (4)
Vinyl Boot (included)	—	—	—	—

Impact wrench suffix: L = Long anvil. Standard anvil for applications where frequent socket change is required. Long anvil for tight applications that require extra reach.

† CE

WARNING

- Use only impact sockets and accessories with impact wrenches
- Read safety precautions on pages W1 to W4

AIR: 1/2" DRIVE IMPACT WRENCHES

Pinned Anvil (P)

3" Long Anvil (L)

MG725G

MG725O

MG725

1/2" Drive Super Duty

Specifications	MG725 †	MG725L †	MG725P †
Drive Size, inches (mm)	1/2 (13)	1/2 (13)	1/2 (13)
Max. Torque, ft-lb (N•m)	810 (1,098)	810 (1,098)	810 (1,098)
Free Speed RPM	9,800	9,800	9,800
Blows Per Minute	1,270	1,270	1,270
Extended Anvil Length, inches (mm)	—	3 (76)	—
Anvil Type	Friction Ring	Friction Ring	Pinned
Air Consumption, Free Speed, CFM (SCFM) [l/min]	5.2 (37) [147]	5.2 (37) [147]	5.2 (37) [147]
Air Inlet Thread Size	1/4"-18 NPT	1/4"-18 NPT	1/4"-18 NPT
Recommended Hose Size, inches (mm)	3/8 (10)	3/8 (10)	3/8 (10)
Vibration Level, m/s²	5.1	5.1	5.1
Sound Level dB(A) Pressure	102.5	102.5	102.5
Length, inches (mm)	7.7 (194)	9.7 (245)	7.7 (194)
Weight, lb (kg)	4.8 (2.2)	5.0 (2.3)	4.8 (2.2)
Vinyl Boot (included)	MG725BOOT	MG725BOOT	MG725BOOT
Color Option: Green	MG725G†	—	—
Color Option: Orange	MG725O†	—	—

Impact wrench suffix: P = Pinned anvil, L = Long anvil, XL = Extra long anvil. Standard anvil for applications where frequent socket change is required. Pinned anvil for high-torque applications where socket security is a priority. Long or extra long anvil for tight applications that require extra reach.

† CE

MG725 Series 1/2" Drive Impact Wrench

- One-piece machined magnesium housing is extremely durable, lightweight and provides alignment of internal parts to reduce vibration
- Eight-vane rotor provides fast motor startup and greater performance with more torque
- Patented cushion grip helps insulate user's hand from cold and reduces vibration to reduce user fatigue
- Patented tip valve trigger provides increased air flow and greater tool control
- Twin-hammer impact mechanism is durable and hard hitting to quickly remove stubborn fasteners
- Sealed-in oil-bath lubrication keeps impact mechanism lubricated for less wear
- Slim-style nose is ideal for working in restricted access areas
- Anvil stops with release of the trigger to prevent throwing of fasteners
- Cushion-grip trigger button delivers improved comfort and control

1/2" DRIVE IMPACT WRENCHES Blue-Point®

AT5500

AT570

Heavy Duty

Specifications	AT5500 †	AT570 †
Drive Size, inches (mm)	1/2 (13)	1/2 (13)
Max. Torque, ft-lb (N•m)	550 (745)	570 (773)
Free Speed RPM	7,400	6,900 (F); 7,000 (R)
Blows Per Minute	1,200	1,050
Anvil Type	Friction Ring	Friction Ring
Air Consumption, Free Speed, CFM (SCFM) [l/min]	4.2 (30) [118.9]	5.0 (36) [142] (F); 5.3 (38) [150] (R)
Air Inlet Thread Size	1/4"-18 NPT	1/4"-18 NPT
Recommended Hose Size, inches (mm)	3/8 (10)	3/8 (10)
Vibration Level, m/s²	4.0	6.08
Sound Level dB(A) Pressure	94	95
Length, inches (mm)	7.9 (20)	7.24 (184)
Weight, lb (kg)	6.4 (2.9)	4.08 (1.87)
Vinyl Boot (included)	AT5500BOOT	AT570BOOT

† CE

AT5500 1/2" Drive Impact Wrench

- 550 ft-lb of torque, 7,400 RPM, 1,200 blows per minute
- Built-in five-position adjustable air regulator plus a variable speed trigger for maximum user control
- Tapered nose increases accessibility to confined areas
- Ball-bearing mounted motor creates a smooth running operation for longer tool life
- One-piece aluminum housing provides a durable tool
- Twin-hammer impact mechanism designed to hit hard yet offer tool longevity
- Inlet filter screens out dirt and grit; easy-to-remove filter for cleaning
- One-year limited warranty
- EU/CE – DE, ES, FR, IT, NL, UK (all models)

AT570 1/2" Drive Impact Wrench

- Use on automotive and truck fasteners
- Shot peen anvils for improved durability
- Reverse Bias motor provides additional breakaway torque
- Three-position regulator to control power
- One-handed forward/reverse lever for user convenience
- Composite housing with aluminum nose combine to deliver a durable, lightweight and balanced unit
- Twin hammer impact mechanism delivers hard-hitting blows to quickly remove stubborn fasteners

MG325

MG325G

MG325O

MG3255

Pinned Anvil (P)



2" Long Anvil (L)

2" Long Pinned Anvil (LP)

1/2", 3/8" Drive Super Duty

Specifications	MG325 †	MG325P †	MG3255 †	MG3255L †	MG3255P †	MG3255LP †
Drive Size, inches (mm)	3/8 (10)	3/8 (10)	1/2 (13)	1/2 (13)	1/2 (13)	1/2 (13)
Max. Torque, ft-lb (N•m)	325 (440)	325 (440)	325 (440)	325 (440)	325 (440)	325 (440)
Free Speed RPM	10,700	10,700	10,700	10,700	10,700	10,700
Blows Per Minute	1,400	1,400	1,400	1,400	1,400	1,400
Extended Anvil Length, inches (mm)	—	—	—	2 (76)	—	2 (76)
Anvil Type	Friction Ring	Pinned	Friction Ring	Friction Ring	Pinned	Pinned
Air Consumption, Free Speed, CFM (SCFM) [l/min]	4 (28) [113]	4 (28) [113]	4 (28) [113]	4 (28) [113]	4 (28) [113]	4 (28) [113]
Air Inlet Thread Size	1/4"-18 NPT	1/4"-18 NPT	1/4"-18 NPT	1/4"-18 NPT	1/4"-18 NPT	1/4"-18 NPT
Recommended Hose Size, inches (mm)	4.5	4.5	4.5	4.5	4.5	4.5
Vibration Level, m/s²	4.5	4.5	4.5	4.5	4.5	4.5
Sound Level dB(A) Pressure	99.1	99.1	99.1	99.1	99.1	99.1
Length, inches (mm)	6.1 (155)	6.1 (155)	6.1 (155)	7.6 (193)	6.4 (162)	7.6 (193)
Weight, lb (kg)	2.8 (1.3)	2.8 (1.3)	2.8 (1.3)	2.9 (1.3)	2.8 (1.3)	2.9 (1.3)
Vinyl Boot (included)	MG325BOOT	MG325BOOT	MG325BOOT	MG325BOOT	MG325BOOT	MG325BOOT
Color Option: Green	MG325G†	—	—	—	—	—
Color Option: Orange	MG325O†	—	—	—	—	—

Impact wrench suffix: P = Pinned anvil, L = Long anvil, LP= Long pinned anvil. Standard anvil for applications where frequent socket change is required. Pinned anvil for high torque applications where socket security is a priority. Long anvil for tight applications that require extra reach.
† CE

MG325 3/8" Drive Impact Wrench

- One-piece magnesium housing for precise internal component alignment to reduce vibration
- Twin hammer impact mechanism delivers hard-hitting blows with fewer moving parts to quickly remove stubborn fasteners
- Continuous oil bath lubrication prolongs tool life by reducing premature component wear
- Eight-vane motor delivers maximum speed and torque
- Lightweight, balanced design distributes weight evenly to reduce user fatigue
- One-handed forward/reverse lever for user convenience
- Cushion grip handle insulates user's hand from cold and absorbs vibration
- Comfort cushion trigger button allows the user to work comfortably with less finger stress
- Anvil stop feature means anvil will stop when trigger is released to avoid throwing fasteners

MG3255 1/2" Drive Impact Wrench

- Same features as MG325, except for a 1/2" drive anvil
- Compact, yet powerful, 1/2" model is ideal for working in confined areas

⚠WARNING

- Use only impact sockets and accessories with impact wrenches
- Read safety precautions on pages W1 to W4

AIR: 3/8", 1/4" DRIVE IMPACT WRENCHES Blue-Point®

AT380A

AT370

AT351

AT235MCA

3/8", 1/4" Drive Impact Wrenches

Specifications	AT380A	AT370 †	AT351 †	AT235MCA †
Drive Size, inches (mm)	3/8 (10)	3/8 (10)	3/8 (10)	1/4 (6)
Max. Torque, ft-lb (N•m)	175 (230)	320 (434)	175 (237)	25 (34)
Free Speed RPM	8,700	10,000 (F), 11,000 (R)	9,700	13,000
Blows Per Minute	1,680	1,050	1,200	2,900
Air Consumption, Free Speed, CFM (SCFM) [l/min]	3.9 (28) [111]	4.4 (326) [125] (F), 4.7 (34) [133] (R)	2.5 (18) [71]	1.67 (12) [47]
Air Inlet Thread Size	1/4"-18 NPT	1/4"-18 NPT	1/4"-18 NPT	1/4"-18 NPT
Recommended Hose Size, inches (mm)	3/8" (10)	3/8" (10)	3/8" (10) ID min.	3/8" (10) ID min.
Vibration Level, m/s²	3.5	3.25	3.09	<2.5
Sound Level dBa Pressure	94	92	96.6	95.1
Length, inches (mm)	6.5 (165)	6.3 (160)	7.6 (194)	6.2 (158)
Weight, lb (kg)	3.0 (1.36)	2.62 (1.19)	2.5 (1.2)	1.4 (.64)
Vinyl Boot (included)	AT380ABOOT	AT370BOOT	—	—

† CE

AT380A 3/8" Drive Impact Wrench
- Built-in five-position adjustable air regulator plus a variable speed trigger for maximum user control
- Aluminum housing provides a lightweight yet durable tool
- Tapered nose increases accessibility to confined areas
- Ball-bearing mounted motor creates a smooth running operation for less user fatigue
- Brass inlet filter screens out dirt and grit; easy-to-remove filter for cleaning
- Twin-hammer impact mechanism designed to hit hard yet offer tool longevity
- One-year limited warranty
- EU/CE – DE, ES, FR,GB, IT, NL

AT370 3/8" Drive Impact Wrench
- Use on automotive and truck fasteners
- Shot peened anvils for improved durability
- Reverse Bias motor provides additional breakaway torque
- Three-position regulator to control power
- One-handed forward/reverse lever for convenient use
- Composite housing with aluminum nose combine to deliver a durable, lightweight and balanced unit
- Twin hammer impact mechanism delivers hard-hitting blows to quickly remove stubborn fasteners

AT351 3/8" Drive Impact Wrench
- Built-in air inlet swivel
- Eight-position power regulator
- Rotary action air motor is ball bearing-mounted for balance, speed and power
- Ideal tool for small engine repair and bench work

AT235MCA 1/4" Drive Micro Impact Wrench
- Fast speed
- Lightweight composite housing with molded comfort grip
- Convenient one-handed forward/reverse lever
- Oversized trigger with variable speed

FAR7200

FAR72C

FAR7000

FAR2505

FAR2500

Air Ratchets

Specifications	FAR7200 †	FAR72C †	FAR7000	FAR2505 †	FAR2500 †
Drive Size, inches (mm)	3/8 (10)	3/8 (10)	3/8 (10)	3/8 (10)	1/4 (6)
Max. Torque, ft-lb (N•m)	5–70 (7–95) (open mode), 5–50 (7–67) (quiet mode)	5–60 (7–61)	0–30 (0–41)	0–35 (0–47)	0–35 (0–47)
Free Speed RPM	260 (open mode), 200 (quiet mode)	225	410	225	225
Air Consumption, Free Speed, CFM (SCFM) [l/min]	4.5 (32) [127]	4.5 (32) [127]	2.6 (18.6) [73.6]	1.7 (11) [48]	1.7 (11) [48]
Air Inlet Thread Size	1/4"-18 NPT	1/4"-18 NPT	1/4"-18 NPT	1/4"-18 NPT	1/4"-18 NPT
Recommended Hose Size, inches (mm)	3/8" (10)	3/8" (10)	3/8" (10)	3/8" (10)	3/8" (10)
Vibration Level, m/s²	5.2	5.3	9.04	2.5	2.5
Sound Level dB(A) Pressure	94.9 (open mode), 87.9 (quiet mode)	93.6	91.4	84	84
Length, inches (mm)	12.1 (308)	11.8 (300)	11.2 (284.5)	7.8 (198)	7.8 (197)
Weight, lb (kg)	3.1 (1.4)	3.1 (1.4)	2.08 (0.94)	1.4 (.6)	1.4 (.6)
Vinyl Boot	YA889 (included)	YA889 (included)	FAR7000BOOT (included)	YA905 (included)	YA905 (included)

† CE

FAR7200 3/8" Drive Ratchet

- Muffler bypass allows tool to be used in quiet mode or full power
- Tip valve style trigger is easy to feather for greater control
- Cushion grip handle for added comfort and control
- Heavy duty motor and crank add durability to handle torque loads
- Steel wear bushings to prevent ratchet head wear
- Large selector knob is easy to turn with greasy hands to change direction

FAR72C 3/8" Drive Ratchet

- Dual pawls for reduced vibration
- Steel wear bushings to prevent ratchet head wear
- Adjustable exhaust directs airflow away from work area
- "Stop lock" pins prevent ratchet pawl lockup
- Easy access zerk fitting allows ratchet head lubrication for longer tool life
- Lightweight aluminum handle provides a sure grip for easy control

FAR7000 3/8" Drive Ratchet

- FAST – 410 RPM free speed for fast removal/installation
- Slim drive head combined with a long reach – 11.2" overall length – makes getting into tight spots easy
- Adjustable exhaust deflector directs exhaust away from the work area
- Lightweight – just 2.08 lb combined with the ergonomic comfort grip handle reduces fatigue
- Maximum torque of 30 ft-lb will not strip threads
- CE – DE, ES, FR, IT, NL, UK

FAR2500 1/4" Drive and FAR2505 3/8" Drive Mini Ratchets

- Balanced lightweight housing weighing 1.4 lb for superior control with less user fatigue
- Soft grip handle with increased comfort and reduced vibration. Insulates against cold
- Large lightweight selector knob, easy to turn with greasy hands, easy to reverse direction
- Robust head design for maximum strength and durability, will not separate for longer tool life
- All ball bearing construction and high strength alloy steel gear system that's dependable and durable

WARNING

- Use only impact sockets and accessories with impact wrenches
- Read safety precautions on pages W1 to W4

AIR: 1/2", 3/8", 1/4" DRIVE RATCHETS

FAR25A

1/4" Drive Air Ratchet

Specifications	FAR25A †
Drive Size, inches (mm)	1/4 (6)
Torque Range, ft-lb (N•m)	5–25 (7–28)
Free Speed RPM	200
Air Consumption, Free Speed, CFM (SCFM) [l/min]	1.4 (10) [40]
Air Inlet Thread Size	1/4"-18 NPT
Recommended Hose Size, inches (mm)	5/16" (7.93)
Vibration Level, m/s²	0.5
Sound Level dB(A) Pressure	87.4
Length, inches (mm)	6.7 (171)
Weight, lb (kg)	1.3 (5)
Vinyl Boot (included)	YA888

† CE

FAR25A 1/4" Drive Ratchet
- Lightweight clamshell housing easily accesses restricted areas
- Needle bearing supported drive shaft provides a smooth running tool
- Ergonomic handle design provides a sure grip and reduces fatigue
- Paddle style variable speed trigger is spring loaded for easy control
- Directional muffler rotates exhaust away from the user
- Air motor vanes resist wear, chipping, cracking and moisture

AIR: 1/2", 3/8", 1/4" DRIVE RATCHETS Blue-Point®

AT705B

AT700F

AT200D

AT204A

Air Ratchets

Specifications	AT705B †	AT700F †	AT200D †	AT204A †
Drive Size, inches (mm)	1/2 (13)	3/8 (10)	1/4 (6)	1/4 (6)
Torque Range, ft lb (N•m)	5–50 (6–68)	5–60 (6–81)	5–25 (6–34)	30 ft lbs Max
3Free Speed RPM	150	165	230	350
Air Consumption, Free Speed, CFM (SCFM) [l/min]	3.0 (22) [85]	3.0 (22) [85]	1.4 (10) [40]	3.5 (25) [99]
Air Inlet Thread Size	1/4"-18 NPT	1/4"-18 NPT	1/4"-18 NPT	1/4"-18 NPT
Recommended Hose Size, inches (mm)	3/8 (10) ID Min.	3/8 (10) ID Min.	3/8 (10)	5/16 (8)
Vibration Level, m/s²	8.7	8.7	3.3	3.6
Sound Level dB(A) Pressure	89	89	85	94
Length, inches (mm)	10.7 (273)	10.1 (257)	8.7 (222)	5.12 (130)
Weight, lb (kg)	2.5 (1.14)	2.5 (1.14)	1.1 (.50)	1.05 (.48)
Vinyl Boot (included)	AT700E49A	AT700E49A	AT200D22A	AT238-36

† CE

AT705B 1/2" Drive Ratchet
- 1/2" drive ratchet in a 3/8" drive body
- Ball bearing mounted motor for longer tool life

AT700F 3/8" Drive Ratchet
- Lightweight aluminum housing
- Rugged ball bearing-mounted air motor and precision planetary gear system
- Easy-to-use variable speed throttle plus adjustable air regulator

AT200D 1/4" Drive Ratchet
- Lightweight aluminum housing
- Rugged ball bearing-mounted air motor and precision planetary gear system

AT204A 1/4" Drive Mini Air Ratchet
- Ideal for working in tight quarters
- Head clearance is less than 3/4"
- Includes variable speed trigger, adjustable air regulator and 5' nylon braided whip hose for maneuverability and control
- Composite housing provides strength and durability

PDR5000A

PDR3000A

1/2" and 3/8" Capacity Drills

Specifications	PDR5000A †	PDR3000A †
Chuck Size, inches (mm)	1/2 (13)	3/8 (10)
Rated Power, HP (kW)	0.45 (.33)	0.45 (.33)
Torque Range, in-lb (N•m)	0–300 (0–34)	0–50 (0–6.0)
Free Speed RPM	450	2,500
Spindle Thread, inches	1/2-20 UNF	3/8-24 UNF
Air Consumption, Average, CFM (SCFM) [l/min]	3.8 (27) [108]	3.5 (25) [99]
Air Inlet Thread Size	1/4"-18 NPT	1/4"-18 NPT
Recommended Hose Size, inches (mm)	3/8 (10)	3/8 (10)
Vibration Level, m/s²	0.9	3.0
Sound Level dB(A) Pressure	82.6	79.7
Length, inches (mm)	8.7 (222)	7 (178)
Weight, lb (kg)	3 (1.3)	2.5 (1.1)
Auxiliary Handle	**PDR5000-40A**	—
Chuck Key	30429	30002
Keyless Chuck (optional)	**PDR5000-2**	**PDR3A-2**

† CE

PDR5000A 1/2" Reversible Drill
- Five-vane air motor delivers high torque power for added durability
- Three-planet industrial strength gear train provides durability for heavy duty applications
- Precise .0025" chuck run-out for precision drilling
- Includes side handle for added control in high torque drilling applications

PDR3000A 3/8" Reversible Drill
- Top mounted forward/reverse switch allows one-hand operation
- Internal ball bearing construction for smooth operation
- Insulated cushion grip to reduce cold and vibration
- Variable speed trigger for added control

AT184

Spotweld Drill

Specifications	AT184 †
Chuck Size, inches (mm)	5/16 (8)
Rated Power, HP (kW)	0.32 (0.65)
Torque Range, in-lb (N•m)	—
Free Speed RPM	0–1,000/0–1,800
Air Consumption, Free Speed, CFM (SCFM) [l/min]	8.4 (60) [238]
Air Inlet Thread Size	1/4"-18 NPT
Recommended Hose Size, inches (mm)	3/8 (10)
Vibration Level, m/s²	<1.0
Sound Level dB(A) Pressure	84
Length, inches (mm)	7.9 (201)
Weight, lb (kg)	3.1 (1.4)
Spotweld Drill Bit (8 mm) (included)	**AT183-50**
Spotweld Drill Bit (6.5 mm) (optional)	**AT183-43**
Spotweld Drill Bit (10 mm) (optional)	**AT183-51**
Support Arm 5.5 (optional)	**AT184-26A**

† CE

AT184 Spotweld Drill (Blue-Point®)
- Twist depth control collar allows precise setting of drilling depth up to 1/4"
- Two-speed trigger for low or high speeds
- Includes (1) 5/16" (8 mm) drill bit and removeable clamp arm

WARNING • Read safety precautions on pages W1 to W4

AIR: 1/4", 3/8", 1/2" CAPACITY DRILLS Blue-Point®

AT5000

AT3000

AT811

AT801MCA

1/4", 3/8" and 1/2" Capacity Drills

Specifications	AT5000 †	AT3000 †	AT811 †	AT801MCA
Chuck Size, inches (mm)	1/2 (13)	3/8 (10)	3/8 (10)	1/4 (6)
Rated Power, HP (kW)	0.45 (.33)	0.45 (.33)	0.25 (.19)	0.25 (.19)
Torque Range, in-lb (N•m)	0–120 (0–14)	0–40 (0–4.5)	0–55 (0–6)	0–18 (0–2.0)
Free Speed RPM	490	1,675	1,320	1,800
Spindle Thread, inches	1/2"-20 UNF	3/8"-24 UNF	3/8"-24 UNF	3/8"-24 UNF
Air Consumption, Average, CFM (SCFM) [l/min]	3.8 (27) [108]	3.5 (25) [95]	3.4 (24) [95]	1.9 (13.6) [53.8]
Air Inlet Thread Size	1/4"-18 NPT	1/4"-18 NPT	1/4"-18 NPT	1/4"-18 NPT
Recommended Hose Size, inches (mm)	3/8 (10)	3/8 (10)	3/8 (10) ID Min.	3/8 (10) ID min.
Vibration Level, m/s²	<2.5	<2.5	<.8	<2.5
Sound Level dB(A) Pressure	82	82	110	96.4
Length, inches (mm)	9 (229)	7.6 (194)	8.2 (208)	7.2 (183)
Weight, lb (kg)	3.8 (1.7)	3.2 (1.4)	2.5 (1.1)	1.5 (0.68)
Auxiliary Handle	PDAH1A	—	—	—
Vinyl Boot (optional)	AT5000BOOT	AT3000BOOT	—	—

† CE

AT5000 1/2" Reversible Drill
- Chuck key conveniently stores in handle
- Variable speed trigger
- Convenient, one-hand forward/reverse operation
- Bottom handle exhaust directs exhaust away from the work

AT3000 3/8" Reversible Drill
- Convenient, one-hand forward/reverse operation
- Bottom handle diffused exhaust
- Comfort grip handle
- Keyless chuck

AT811 3/8" Angle Drill
- Convenient, one-hand push button forward/reverse
- Rear exhaust keeps air away from the work area
- Ball bearing construction for longer tool life

AT801MCA 1/4" Micro Drill
- Small size ideal for working in confined areas
- Durable composite housing stands up to rugged use
- Reverse lever conveniently positioned for one-hand operation
- Oversize variable speed trigger

PH3050B

AT2050

Super and Heavy Duty Hammers

Specifications	PH3050B †	AT2050 †
Bore Diameter, inches (mm)	3/4 (19)	3/4 (19)
Blows Per Minute	2,500	3,400
Piston Stroke, inches (mm)	3 (76)	2.75 (70)
Shank Opening, inches (mm)	0.401 (10.1)	0.401 (10.1)
Air Consumption, Free Speed, CFM (SCFM) [l/min]	2.1 (14) [59]	2.5 (18) [71]
Air Inlet Thread Size	1/4"-18 NPT	1/4"-18 NPT
Recommended Hose Size, inches (mm)	5/16" (8)	5/16" (8)
Vibration Level, m/s²	2.8	3.0
Sound Level dB(A) Pressure	91.4	99
Length, inches (mm)	9.0 (228)	7.4 (187)
Weight, lb (kg)	5.9 (2.7)	4.6 (2.1)
Vinyl Boot (optional)	PH3050BOOT	AT2050BOOT

† CE

PH3050B Super Duty Hammer
- Dual elastomer cushions absorb shock and vibration to reduce user fatigue
- Phenolic (Kevlar® reinforced) flutter disc provides long life
- Direct multi-port front exhaust keeps air and debris away from user
- High grade steel barrel provides greater strength
- Variable speed soft-touch trigger provides featherability for greater control
- Four-position built-in air regulator varies power for different applications
- Air line screen helps prevent foreign particles from clogging trigger mechanism
- Hardened steel piston delivers harder blows for maximum impact
- Includes PH200D Quick Change Chuck Retainer

AT2050 Heavy Duty Hammer (Blue-Point®)
- Variable speed trigger with built-in speed regulator
- Quick change chuck makes bit changing easy
- Comfort grip handle for less user fatigue
- Hard hitting to get the job done quicker

PH3050BCH4† Super Duty Set

Includes:

Stock No.	Description
PH3050B	Super-Duty Air Hammer
PH200D	Retainer Chuck
PHG55A	Flat Chisel, 3/4" Wide
PHG57A	Double-Blade Panel Cutter, 3/4" Wide
PHG59A	Taper Punch, 3/16" Tip
PHG87A	Muffler Cutter, 17/32" Wide
PB1D	Carrying Case

PH3050BCH4

PH200D Universal Quick Change Chuck Retainer
- Use for fast and easy insertion/removal of air hammer bits
- Non-turning insert design reduces wear for longer tool life
- Constructed from high grade steel; insert is constructed from durable polyurethane elastomer
- Universal design fits most air hammers
- Knurled collar provides a solid gripping surface, even with greasy hands

PH200D

WARNING

- Use air hammer accessories only for intended purpose, replace when worn or broken
- Read safety precautions on pages W1 to W4

AIR: DIE GRINDERS

PT100A

PT110A

PT200A

PT210A

PT200AL

PT100 and 200 Series Die Grinders

- Ergonomic handle is contoured to fit comfortably in the hand as well as absorb vibration
- Adjustable rear exhaust outlet allows adjustment of exhaust away from the work area while keeping material removal away from operator's face
- Thermally balanced air motor acts as internal cooling system to protect moving parts, efficiently routing air to control surface temperature of tool
- Built-in ten-position power/speed regulator precisely matches tool speed to job requirements
- Easy bit changing using standard wrenches
- Safety style variable speed paddle trigger helps prevent accidental starting of tool
- Low dB(A) rating reduces fatigue from noise
- Dual taper collet system for improved bit retention

Straight, Angle Head and Extended Shaft – 1/4" Collet

	Mini Series		Standard Series		
Specifications	**PT100A †**	**PT110A †**	**PT200A †**	**PT210A †**	**PT200AL †**
Collet Size, inches	1/4	1/4	1/4	1/4	1/4
Rated Power, HP (kW)	0.3 (.2)	0.3 (.2)	0.5 (.3)	0.5 (.3)	0.5 (.3)
Free Speed RPM	20,000	25,000	22,000	20,000	22,000
Air Consumption, Free Speed, CFM (SCFM) [l/min]	1.7 (11) [48]	1.7 (11) [48]	3.2 (23) [90]	3.2 (23) [90]	3.2 (23) [90]
Air Inlet Thread Size	1/4"-18 NPT	1/4"-18 NPT	1/4"-18 NPT	1/4"-18 NPT	1/4"-18 NPT
Recommended Hose Size, inches (mm)	3/8 (10)	3/8 (10)	3/8 (10)	3/8 (10)	3/8 (10)
Vibration Level, m/s²	3.2	6.3	2	5.2	3
Sound Level dB(A) Pressure	83.3	85.9	85.1	86	85.9
Length, inches (mm)	6.1 (155)	5.75 (146)	6.9 (175)	6.4 (162)	10.9 (276)
Weight, lb (kg)	1 (0.4)	1.2 (0.5)	1.2 (0.5)	1.4 (.63)	2.1 (.95)

† CE

PT400 Heavy Duty Series Die Grinders

PT400

PT410

PT400L

Straight, Angle Head and Extended Shaft – 1/4" Collet

- 1 HP thermally balanced air motor
- Dual taper collet system
- Paddle style safety trigger
- Easy bit changing using standard wrenches
- Low dB(A) rating reduces fatigue from noise

Specifications	**PT400 †**	**PT410 †**	**PT400L †**
Collet Size, inches	1/4	1/4	1/4
Rated Power, HP (kW)	1.0 (.6)	1.0 (.6)	1.0 (.6)
Free Speed RPM	25,000	12,000	23,000
Air Consumption, Free Speed, CFM (SCFM) [l/min]	4.17 (30) [118]	4.17 (30) [118]	4.17 (30) [118]
Air Inlet Thread Size	1/4"-18 NPT	1/4"-18 NPT	1/4"-18 NPT
Recommended Hose Size, inches (mm)	3/8 (10)	3/8 (10)	3/8 (10)
Vibration Level, m/s²	2.1	.78	3.25
Sound Level dB(A) Pressure	84.7	81.8	82.2
Length, inches (mm)	7.5 (190)	7.5 (190)	12.25 (311)
Weight, lb (kg)	1.5 (.68)	2.0 (.91)	2.6 (1.1)

† CE

AT115

AT118

AT105

AT109

AT109DGK

AT119

AT116

AT120L

AT120LRA

Straight and Angle Head Die Grinders - 1/4" Collet

Specifications	AT115 †	AT118 †	AT105 †	AT109* †	AT119 †	AT116 †	AT120L	AT120LRA
Collet Size, inches	1/4	1/4	1/4	1/4	1/4	1/4	1/4 (6.35 mm)	1/4 (6.35 mm)
Rated Power, HP (kW)	0.45 (.33)	0.2 (.15)	0.45 (.33)	0.2 (.15)	0.2 (.15)	0.2 (.15)	0.22 (.164)	0.45 (.335)
Free Speed RPM	22,000	20,000	22,000	20,000	20,000	20,000	23,000	18,000
Air Consumption, Free Speed, CFM (SCFM) [l/min]	4 (29) [113]	4.0 (29) [113]	4 (29) [113]	2.1 (15) [59]	3 (15) [59]	3 (15) [59]	3.0 (22)	3.3 (24) [93.4]
Air Inlet Thread Size	1/4"-18 NPT	1/4"-18 NPT	1/4"-18 NPT	1/4"-18 NPT	1/4"-18 NPT	1/4" -18 NPT	1/4"-18 NPT	1/4"-18 NPT
Recommended Hose Size, inches (mm)	3/8 (10)	3/8 (10)	3/8 (10) ID Min.	3/8 (10)	3/8 (10)	3/8 (10)	3/8 (10)	3/8 (10)
Vibration Level, m/s²	<2.5	2.5	<2.5	2.5	<6.92	3	1.83	1.83
Sound Level dB(A) Pressure	95	93	102	93	100	100	77	79
Length, inches (mm)	6.5 (165)	5.5 (140)	6.5 (165)	5.5 (140)	6.81 (173)	6.5 (165)	11.02 (280)	11.25 (285)
Weight, lb (kg)	1.3 (.61)	1.1 (.50)	1.3 (.61)	1.1 (.50)	1.1 (50)	1.1 (50)	1.45 (.66)	1.63 (.74)

* See p.485 for AT109DGK die grinder kit specifications.
† CE

AT115 Standard Die Grinder
- Intended for most standard deburring operations
- Ergonomic handle grip increases comfort and control
- Safety lever throttle
- Built-in speed regulator
- Brass bearing cap and hose adaptor
- Rear diffused exhaust

AT118 Right Angle Mini Die Grinder
- Clean dies, rotors, backing plates and brake pad mounts
- Remove gasket material
- Grind dies and valve seats
- Dress welds and enlarge holes
- Compact mini-design with 90° angled head for easy access
- Ergonomic handle grip increases comfort and control
- Safety lever throttle
- Built-in speed regulator
- Brass bearing cap and hose adaptor

AT105 Standard Die Grinder
- Aluminum housing for long lasting durability
- Intended for most standard deburring operations
- High quality bearings improve productivity with less repair
- Rear exhaust directs air away from work area

AT109 Right Angle Mini Die Grinder
- Aluminum housing for long lasting durability
- Compact mini design with 90° head for easy access
- High quality bearings improve productivity with less repair

AT109DGK Die Grinder Kit
Includes: AT109 mini angle die grinder plus one 2" (50.8 mm) *ROLOC* pad, two 2" (50.8 mm) coarse discs, two 2" (50.8 mm) medium discs, two 2" (50.8 mm) 24 grit discs, two 2" (50.8 mm) 36 grit discs, two 2" (50.8 mm) crud discs, one 3" (76.2 mm) *ROLOC* pad, two 3" (76.2 mm) 50 grit discs, two 3" (76.2 mm) 120 grit discs, two 3" (76.2 mm) crud discs, one 1/4" shank adaptor and two spanner wrenches in storage case.

AT119 Mini Angle Die Grinder (115°)
- 115° offset head provides a more ergonomic grinding position
- Thread-on style disc provides a more compact head
- One 2" quick change disc included so tool is ready for your abrasive pad
- Body work spot sanding
- Cleaning gasket material from surfaces
- Dressing welds
- Cleaning brake rotors, backing plates and brake pad

AT116 Mini Angle Die Grinder (115°)
- 115° offset head provides a more ergonomic grinding position
- Quick change 1/4" collet for faster job changes
- Compact size is ideal for accessing tough-to-reach areas
- Comfort grip over mold
- Variable speed regulator for precision control
- CE – DE, ES, FR, IT, GB, NL

Optional Accessories:

AT116-3 ROLOC® Pad (2", 1/4" shaft)
AT116-4 *ROLOC* Pad (3", 1/4" shaft)

AT120L Extended Length Mini Die Grinder
- Extended reach of 4.5" to gain access into limited work space
- Comfort grip reduces fatigue
- Built-in speed regulator matches tool speed to the job
- Safety throttle — release the lever and the tool turns off
- CE – DE, ES, FR, IT, GB, NL

AT120LRA Right Angle Extended Length Mini Die Grinder
- Built-in speed regulator matches tool speed to the job
- Comfort grip reduces fatigue
- Safety throttle release the lever and the tool turns off
- .45 HP motor with free speed of 18,000 RPM
- Extended reach of 4.5" with a 90° head

⚠WARNING
- Use only accessories intended for die grinders
- Do not use grinder accessories above their maximum rated RPM
- Read safety precautions on pages W1 to W4

AIR: DIE GRINDERS Blue-Point®

AT1070A

AT1070RA

Pencil Die Grinders

Specifications	AT1070A †	AT1070RA †
Collet Size, inches	1/8	1/8
Rated Power, HP (kW)	—	—
Free Speed RPM	75,000	75,000
Air Consumption, Free Speed, CFM (SCFM) [l/min]	1 (7) [28]	1 (7) [28]
Air Inlet Thread Size	1/4"-18 NPT	1/4"-18 NPT
Recommended Hose Size, inches (mm)	3/8 (10)	3/8 (10)
Vibration Level, m/s²	2.0	2.0
Sound Level dB(A) Pressure	72	72
Length, inches (mm)	5.3 (135)	5.9 (150)
Weight, lb (kg)	.55 (0.25)	.46 (0.21)

† CE

AT1070A Pencil Die Grinder
- Twist action variable speed control
- 5' (1.5 m) long protected air hose
- Used with 1/8" shank grinding accessories rated a minimum of 75,000 RPM
- Ideal for tight spaces and easy cleaning of dies, rotors and brake pads

AT1070RA Pencil Die Grinder
- Same as AT1070A except features right angle head

CUT OFF TOOLS

PT250A

PT430

PT490

Cut Off Tools

Specifications	PT250A †	PT430	PT490
Wheel Size, inches (mm)	3 (76)	3 (76)	4 (102)
Rated Power, HP (kW)	0.5 (.37)	1.0 (0.75)	1.0 (0.75)
Free Speed RPM	22,000	25,000	12,000
Air Consumption, Free Speed, CFM (SCFM) [l/min]	3.2 (23) [90]	4.17 (23) [90]	4.17 (23) [90]
Air Inlet Thread Size	1/4"-18 NPT	1/4"-18 NPT	1/4"-18 NPT
Recommended Hose Size, inches (mm)	3/8 (10)	3/8 (10)	3/8 (10)
Vibration Level, m/s²	6	6.92	3.41
Sound Level dB(A) Pressure	86.1	87	87.8
Length, inches (mm)	7.2 (183)	7.5 (190)	9.3 (236)
Weight, lb (kg)	1.6 (.73)	1.9 (.86)	3 (1.3)
3" Cutter Wheels (36-Grit) (optional)	AT150-20A	AT150-20A	—
3" Cutter Wheels (54-Grit) (optional)	AT150C29A	AT150C29A	—
4" Cutter Wheels (optional)	—	—	AT154RWHLMP

† CE

PT250A Cut Off Tool (3")
- Adjustable cutting wheel guard rotates to any safe and convenient position
- Adjustable rear exhaust keeps exhaust away from the work area
- Thermally balanced air motor acts as internal cooling system to protect moving parts and efficiently routes air to control surface temperature of tool
- Ten-position power/speed regulator precisely matches tool speed to job requirements

PT430 Cut Off Tool (3")
- Powerful thermally balanced air motor cools internal parts and tool surface
- Double bearings for smooth operation
- Lightweight and ergonomic comfort grip handle for less user fatigue
- Built-in speed regulator for easy adjustment
- Rear-diffused exhaust directs exhaust away from the work area
- Paddle-style trigger/safety lever for easy operation
- Precision-machined steel end plates
- Adjustable wheel guard so tool can be used at any angle
- UL® – JP

PT490 Angle Cut Off Tool (4")
- 4" cutting wheel
- Powerful thermally balanced air motor cools internal parts and tool surface
- Steel angle head with heavy duty spiral bevels gears for tool longevity
- Double bearings for smooth operation
- Instinct side handle (included) to increase leverage and ergonomic comfort-grip handle for less user fatigue
- Built-in speed regulator for easy adjustment
- Rear-diffused exhaust directs exhaust away from work area
- Paddle-style trigger/safety lever for easy operation
- Precision-machined steel end plates
- Adjustable wheel guard so tool can be used at any angle
- *UL* – JP

Reversible Cut Off Tools (Blue-Point®)

Specifications	AT154RA †	AT157R †
Wheel Size, inches (mm)	4 (102)	3 (76)
Rated Power, HP (kW)	0.7 (0.5)	0.45 (.33)
Free Speed RPM	13,000	20,000
Air Consumption, Free Speed, CFM (SCFM) [l/min]	3.1 (22) [87]	3.5 (25) [99]
Air Inlet Thread Size	1/4" - 18 NPT	1/4" - 18 NPT
Recommended Hose Size, inches (mm)	3/8 (10)	3/8 (10)
Vibration Level, m/s²	3.07	<3.8
Sound Level dB(A) Pressure	85	100
Length, inches (mm)	14.3 (365)	7.3 (185)
Weight, lb (kg)	3.3 (1.5)	1.9 (.86)
3" Cutter Wheels (36-Grit) (optional)	—	AT150-20A
3" Cutter Wheels (54-Grit) (optional)	—	AT150C29A
4" Cutter Wheels	AT154RWHLMP	—

† CE

AT154RA

AT157R

AT154RA Reversible Cut Off Tool (4")

- 14.3" overall length provides extended reach for easier access
- Reverse mode controls direction of sparks for safety
- Exhaust diffused through the rear of tool away from work surface
- Side handle provides additional tool control

AT157R Reversible Cut Off Tool (3")

- Reversible to change direction of sparks
- Built-in speed regulator for fine tuning
- Extended reach for hard-to-access areas

Cut Off Tools *(Blue-Point)*

Specifications	AT153
Wheel Size, inches (mm)	3 (76)
Rated Power, HP (kW)	0.5 (0.37)
Free Speed, RPM	17,000
Air Consumption, Free Speed, CFM (SCFM) [l/min]	3.5 (24) [99.1]
Air Inlet Thread Size	1/4"-18 NPT
Recommended Air Pressure, psig (kPa)	90 (620)
Recommended Hose Size, inches (mm)	3/8 (10)
Vibration Level, m/s²	<2.86
Sound Level dB(A) Pressure	85
Length, inches (mm)	7.3 (185)
Weight, lb (kg)	3.3 (1.5)
3" Cutter Wheels (36-Grit) (optional)	AT150-20A
3" Cutter Wheels (54-Grit) (optional)	AT150C28A
4" Cutter Wheels (optional)	—

† CE

AT153

AT153 Cut Off Tool (3")

- Compact size excellent for accessing areas with limited working space
- Heavy duty bevel gears for tool longevity
- Indexing adjustable guard controls the direction of sparks
- Spindle lock eliminates the need for special wrenches for fast change of cut-off wheels
- Adjustable built-in regulator easily adjusts up to 17,000 RPM free speed
- CE – DE, ES, FR, IT, GB, NL

⚠WARNING

- When using die grinder, use only accessories intended for die grinder
- Do not operate without the guard
- Do not use grinder accessories above their maximum rated RPM
- Read safety precautions on pages W1 to W4

AIR: GRINDERS

PT450

Grinder

Specifications	PT450 †
Wheel Size, inches (mm)	4 1/2 (114)
Rated Power, HP (kW)	1.0
Free Speed RPM	12,000
Air Consumption, Free Speed, CFM (SCFM) [l/min]	4.17 (30) [91]
Air Inlet Thread Size	1/4"-18NPT
Recommended Hose Size, inches (mm)	3/8 (10)
Vibration Level, m/s²	8.9
Sound Level dB(A) Pressure	86.3
Length, inches (mm)	9 (229)
Weight, lb (kg)	3.25 (1.47)
Grinding Discs	PT450-WH

† CE

PT450 4 1/2" Angle Grinder
- 12,000 RPM Maximum Free Speed
- 1 HP thermally balanced air motor
- Adjustable Wheel Guard
- Lightweight, only 3 1/4 lb
- Features Snap-on® Instinct® Screwdriver Side Handle

AT415B

Grinder (Blue-Point®)

Specifications	AT415B †
Wheel Size, inches (mm)	4 1/2 (114)
Rated Power, HP (kW)	0.86 (.64)
Free Speed RPM	12,000
Air Consumption, Free Speed, CFM (SCFM) [l/min]	3.2 (23) [91]
Air Inlet Thread Size	1/4"-18 NPT
Recommended Hose Size, inches (mm)	3/8 (10)
Vibration Level, m/s²	5.1
Sound Level dB(A) Pressure	87
Length, inches (mm)	10 (254)
Weight, lb (kg)	4.2 (1.9)
Grinding Discs	AT415A51

† CE

AT415B 4 1/2" Compact Grinder (*Blue-Point*)
- Includes one grinding disc

CUTTING TOOLS

PTS500

PTS1000

Air Saws

Specifications	PTS500 †	PTS1000 †
Free Speed RPM	9,500	10,000
Air Consumption, Free Speed, CFM (SCFM) [l/MIN]	1.1 (8.5) [33.9]	1.0 (8.5) [33.9]
Air Inlet Thread Size	1/4"-18 NPT	1/4"-18 NPT
Recommended Hose Size, inches	3/8 (10)	3/8 (10)
Vibration Level, m/s²	3.68	2.99
Sound Level dB(A) Pressure	90.7	87.1
Stroke Length, inches (mm)	3/8 (10)	3/8 (10)
Length, inches (mm)	7.8 (198)	9.4 (238)
Weight, lb (kg)	1 (0.45)	1.5 (0.69)

† CE

PTS500 Mini Air Saw
- Can cut 1/8" (3 mm) thick mild steel
- Low vibration – 3.68 m/s² – for less user fatigue
- Chuck accepts standard 0.035" thick air saw blades
- Featherable paddle trigger with safety lever for easy operation
- 360° adjustable exhaust deflector
- Smooth cutting action
- Comfort-grip handle
- Includes three 3 5/8" long air saw blades (one each: 18 TPI, 24 TPI and 32 TPI)
- UL® – Listed: JP

PTS1000 Dual Chuck Air Saw
- Dual chuck accepts 0.035" standard air saw blades and 6" long reciprocating saw blades
- Can cut 1/8" (3 mm) thick mild steel
- Smooth cutting action
- Comfort grip handle
- Low vibration (2.99 m/s²) for less user fatigue
- Featherable paddle trigger with safety lever for easy operation
- 360° adjustable exhaust deflector
- Includes three 3 5/8" long air saw blades (one each 18 TPI,24 TPI and 32 TPI) and one 6" long reciprocating saw blade (18 TPI)
- *UL* – Listed: JP

AT192A

AT194A

Reciprocating Saws

Specifications	Free Speed RPM	Air Consumption, Free Speed, CFM (SCFM) [l/min]	Air Inlet Thread Size	Recommended Hose Size, inches (mm)	Vibration Level, m/s²	Sound Level dB(A) Pressure	Length, inches (mm)	Weight, lb (kg)
AT192A †	11,000	1.0 (7) [28]	1/4"-18 NPT	3/8 (10)	10.1	94	9.3 (235)	1.75 (0.80)
AT194A †	8,250	0.7 (5) [20]	1/4-18NPT	3/8 (10)	<6.6	87	6.7 (175)	1 (0.45)

Replacement Blades	
Bi-Metal Blade Scroll, 18TPI, 3 3/4" long (qty. 5)	AT190-39C
Bi-Metal Blade Scroll, 24 TPI, 3 3/4" long (qty. 5)	AT190-40C
Bi-Metal Blade Scroll, 32 TPI, 3 3/4" long (qty. 5)	AT190-41C

† CE

AT192A High Speed Reciprocating Saw
- Adjustable blade guard to control cutting depth
- Teflon® coated piston for smooth operation and durability
- Comfort grip handle with safety lever throttle
- Includes bi-metal blades: one 18TPI, one 24TPI, one 32TPI

AT194A Micro Air Saw
- Compact size for easy access in tight quarters
- Guarded hose extension helps prevent damage to finished surfaces
- Performs straight or scroll cuts in metal and plastic
- Includes bi-metal blades: one 18TPI, one 24TPI, one 32TPI

AT195

Shears

Specifications	Free Speed RPM	Air Consumption, Free Speed, CFM (SCFM) [l/min]	Air Inlet Thread Size	Recommended Hose Size, inches (mm)	Vibration Level, m/s²	Sound Level dB(A) Pressure	Length, inches (mm)	Weight, lb (kg)
AT195 †	—	4.0 (29) [113]	1/4"-18 NPT	3/8 (10)	<2.5	99.6	10 (254)	2.8 (1.3)

† CE

AT195 Air Powered Shears
- Trims, outlines and shears
- Replaceable brass filter screen
- Built-in speed regulator

AT180C

Nibbler

Specifications	Free Speed RPM	Air Consumption, Free Speed, CFM (SCFM) [l/min]	Air Inlet Thread Size	Recommended Hose Size, inches (mm)	Vibration Level, m/s²	Sound Level dB(A) Pressure	Length, inches (mm)	Weight, lb (kg)
AT180C †	3,500	4 (29) [113]	1/4"-18 NPT	3/8 (10)	4.3	97	7.6 (193)	1.9 (.88)

† CE

AT180C Nibbler
- Cuts mild steel sheet up to 16 gauge (0.62") (1.55 mm)
- Anvil is adjustable for forward, backward and left or right cutting
- Readily cuts most non-ferrous materials including aluminum, brass, formica, laminates, fiberglass and masonite

WARNING
- Do not operate without the guard
- Do not use grinder accessories above their maximum rated rpm
- Read safety precautions on pages W1 to W4

AIR: SANDERS

PS4512

PS4612

PSF4612

PSF4312

PS4609

PS4809

Orbital and Geared Sanders

Specifications	PS4512 †	PS4612 †	PSF4612 †	PSF4312 †	PS4609 †	PS4609V †	PS4809 †	PS4809V †
Pad Size, inches (mm)	5 (127)	6 (152)	6 (152)	3 (76)	6 (152)	6 (152)	8 (203)	8 (203)
Rated Power, HP (kW)	0.25 (.19)	0.25 (.19)	0.25 (.19)	0.25 (.19)	0.42 (.33)	0.42 (.33)	0.42 (.33)	0.42 (.33)
Free Speed RPM	12,000	12,000	12,000	12,000	1,000	1,000	1,000	1,000
Spindle Thread, inches	5/16-24	5/16-24	5/16-24	1/4-20	3/8	3/8	3/8	3/8
Air Consumption, Free Speed, CFM (SCFM) [l/min]	2 (14) [57]	2 (14) [57]	2 (14) [57]	2 (14) [57]	3 (21.7) [85]	3 (21.7) [85]	3 (21.7) [85]	3 (21.7) [85]
Air Inlet Thread Size	1/4"-18 NPT	1/4"-18 NPT	1/4"-18 NPT	1/4"-18 NPT	1/4"-18 NPT	1/4"-18 NPT	1/4"-18 NPT	1/4"-18 NPT
Recommended Hose Size, inches (mm)	3/8 (10)	3/8 (10)	3/8 (10)	3/8 (10)	3/8 (10)	3/8 (10)	3/8 (10)	3/8 (10)
Vibration Level, m/s²	2.3	2.3	2.1	2.1	5.9	5.9	5.9	5.9
Sound Level dB(A) Pressure	75.3	75.3	74.9	74.9	80	80	80	80
Length, inches (mm)	5 (127)	6 (152)	6 (152)	3 (76)	11 (281)	11 (281)	11 (281)	11 (281)
Weight, lb (kg)	1.7 (0.77)	2.5 (1.14)	2.4 (1.11)	1.44 (0.65)	3.7 (1.70)	3.7 (1.70)	4 (1.82)	4 (1.82)
Standard Pad	PS4512-1AH	PS4612-1AH	PS4612-1AH	PS4312-1H	PS468-34	PS468-34V	PS468-35	PS468-35V

† CE

PS4512/PS4612/PSF4612 Orbital Sander (5")

- Delivers 12,000 RPM with unsurpassed control and comfort
- Soft, ergonomic adjustable grip is indexable and can be rotated to fit the user's hand
- Patented O-ring sealed motor extends tool life by preventing dust and debris from entering mechanical components
- S-shaped paddle lever to better fit the curve of the user's hand to provide comfort and resist fatigue
- Multi-position regulator controls maximum speed for versatility
- Robust front spindle and precision balanced crank extend motor life and provide smoother operation with minimal vibration
- Patented bearing dust shield extends motor life by preventing contamination of lower motor bearings
- Composite over molded housing is lightweight and easy to maneuver
- Optional PSV4612KIT vacuum kit is also available

PSF4312 Orbital Sander (3")

- Same features as PS4612 except: 3" lightweight, 30 gram pad is flexible for spot sanding and feather edging, providing more control of the application

PS4609 (6") and PS4809 (8") Geared Sanders

- Remove and level large amounts of filler materials such as glue or epoxy
- To level small welds
- Removing coatings prior to painting
- For use on metal, solid surfaces, wood and fiberglass
- Super ergonomic adjustable grip is indexable to multiple positions for optimum comfort
- Soft grip housing material for maximum vibration absorption
- PS4609V vacuum model
- PS4809V vacuum model

AT408

AT411A

Sanders

Specifications	AT408 †	AT411A †
Pad Size, inches (mm)	8 (203)	6 (152)
Rated Power, HP (kW)	0.5 (.37)	0.5 (.37)
Free Speed RPM	850	10,000
Spindle Thread, inches	5/16-24	5/16-18 UNC
Air Consumption, Free Speed, CFM (SCFM) [l/min]	5 (36) [142]	5 (36) [142]
Air Inlet Thread Size	1/4"-18 NPT	1/4"-18 NPT
Recommended Hose Size, inches (mm)	3/8 (10)	3/8 (10) ID Min.
Vibration Level, m/s²	3.7	3.7
Sound Level dB(A) Pressure	87	79
Length, inches (mm)	11 (281)	8 (203)
Weight, lb (kg)	4.8 (2.18)	4.7 (2.14)
Standard Pad	AT408-2	AT411A-1

† CE

AT408 Geared Sander (8")
- Rear diffused exhaust
- Built-in adjustable speed regulator
- Removable brass filter screens out debris

AT411A Dual Action Sander (6")
- For fine sanding operations and swirl-free finishing
- Comfort handle helps reduce fatigue
- Converts from rotary to random orbit action by sliding drive plate
- Built-in thumb wheel speed regulator

AT425R

Reversible Disc Sanders

Specifications	AT425R †
Pad Size, inches (mm)	5 (127)
Rated Power, HP (kW)	0.45 (.33)
Free Speed RPM	13,000
Spindle Thread, inches	7/16-20 UNC
Air Consumption, Free Speed, CFM (SCFM) [l/min]	4.3 (31) [122]
Air Inlet Thread Size	1/4"-18 NPT
Recommended Hose Size, inches (mm)	3/8 (10)
Vibration Level, m/s²	<0.8
Sound Level dB(A) Pressure	93
Length, inches (mm)	5.3 (135)
Weight, lb (kg)	2.8 (1.28)
Standard Pad	AT425R-24
3" Replacement Pad (opt.)	AT425R-22
4" Replacement Pad (opt.)	AT425R-23

† CE

AT425R Reversible Hi-speed Sander (5")
- Comfort grip handle
- One-hand forward/reverse lever
- Built-in speed regulator
- Includes three backing discs: 3", 4" and 5"

AT406C

Orbital Sander

Specification	AT406C
Pad/Disc Size, Dia., inches (mm)	6 (152)
Rated Power, HP (kW)	.25 (.19)
Free Speed, RPM	12,000
Spindle Thread, inches	5/16–24
Air Consumption, Free Speed, CFM (SCFM) [l/min]	2.5 (18) [71]
Sound Level dB(A) Pressure	85
Length, inches (mm)	8.6 (21.9)
Weight, lb (kg)	1.5 (0.7)

AT406C Orbital Palm Sander (6")
- Lightweight & durable composite housing
- Built-in power regulator for optimized power control
- Well-balanced for smooth handling
- For use with accessories rated above 12,000 RPM

AT475A

In-Line Sander

Specifications	AT475A †
Free Speed RPM	1,800
Air Consumption, Free Speed, CFM (SCFM) [l/min]	2.3 (17) [65]
Air Inlet Thread Size	1/4"-18 NPT
Recommended Hose Size, inches (mm)	3/8 (10) ID Min.
Vibration Level, m/s²	14.9
Sound Level dB(A) Pressure	87
Length, inches (mm)	16 (406)
Weight, lb (kg)	6.8 (3.09)
Standard Pad	AT475A-29

† CE

AT475A Heavy Duty In-Line Sander (16")
- 5/8" stroke
- Minimal vibration
- For fast material removal
- Pad has positive locking clamps

WARNING

- Do not use grinding discs on sanders
- Read safety precautions on pages W1 to W4

AIR: FINISHING TOOLS Blue-Point®

AT615K

AT615K Belt Sander Kit
- Includes belt sander,three 18" x 3/8" sanding belts (60, 80, 120 grit), three 18" x 1/2" sanding belts (60, 80, 120 grit) and three 18" x 3/4" sanding belts (60, 80, 120 grit)

AT615ARM1 Contact Arm Assembly (1" D x 3/8" W rubber)
- Use with AT615 Belt Sander

AT615ARM2 Contact Arm Assembly (3/4" D x 3/8" W rubber)
- Use with AT615 Belt Sander

AT615ARM3 Contact Arm Assembly (3/4" D x 5/8" W)
- Use with AT615 Belt Sander

AT615-31 Collet Assembly (1/4")
- Optional 1/4" collet assembly for use with the AT615 Belt Sander

AT615KPB Storage Case
- Storage case for the AT615K Belt Sander Kit

Belts

Stock No.	Description	Size	Grit	Package Quantity
ATBA381860	Coated Abrasive	3/8" x 18"	60	5 each
ATBA381880	Coated Abrasive	3/8" x 18"	80	5 each
ATBA3818120	Coated Abrasive	3/8" x 18"	120	5 each
ATBA121860	Coated Abrasive	1/2" x 18"	60	5 each
ATBA121880	Coated Abrasive	1/2" x 18"	80	5 each
ATBA1218120	Coated Abrasive	1/2" x 18"	120	5 each
ATBA341860	Coated Abrasive	3/4" x 18"	60	5 each
ATBA341880	Coated Abrasive	3/4" x 18"	80	5 each
ATBA3418120	Coated Abrasive	3/4" x 18"	120	5 each
ATBB121850	Non-Woven Abrasive	1/2" x 18"	50	5 each
ATBB1218100	Non-Woven Abrasive	1/2" x 18"	100	5 each
ATBB1218240	Non-Woven Abrasive	1/2" x 18"	240	5 each
ATBB341850	Non-Woven Abrasive	3/4" x 18"	50	5 each
ATBB3418100	Non-Woven Abrasive	3/4" x 18"	100	5 each
ATBB3418240	Non-Woven Abrasive	3/4" x 18"	240	5 each
ATBB381850	Non-Woven Abrasive	3/4" x 18"	50	5 each
ATBB3818100	Non-Woven Abrasive	3/4" x 18"	100	5 each
ATBB3818240	Non-Woven Abrasive	3/4" x 18"	240	5 each

AT240

Tire Buffer

AT240 Tire Buffer
- Use for tire patch preparation, roughing up rubber for tire recaps plus removing excess rubber
- Speed regulator for improved tool control
- Comfort grip housing for reduced operator fatigue
- Rear exhaust directs air away from work
- Semicircle buffing wheel for maximum surface preparation

AT265A

Pinstripe Removal Tool

AT265A Pinstripe Removal Tool
- Use to remove pinstripes, adhesive, tape and graffiti
- Includes three 3.5" eraser pads to keep you working longer
- Step pad eraser design for improved visibility during operation
- Comfort grip handle for less fatigue
- Auxiliary side handle for improved tool control

AT1212A

Needle Scaler

AT1212 Mini Needle Scaler
- Mini size for access in confined areas
- Smooth palm controlled trigger mechanism for ease of operation
- 12 high-tension steel needles conform to any irregular surface for cleaning crevices

Stock No.	Pad Size	Style	Rated Power, HP (kW)	Free Speed RPM	Spindle Size	Air Consumption	Vibration Level, m/s²	Sound Level dB(A) Pressure	Length, inches (mm)	Weight, lb (kg)
AT240 †	—	Tire Buffer	0.4	2,600	—	3.7 (26.6) [104.7]	1.18	89	9.1 (233)	1.8 (.82)
AT265A †	3.5	Pinstripe Removal Tool	0.4	3,600	5/16"-24	3.7 (26.6) [104.7]	0.69	88	8.1 (206)	1.8 (.82)
AT1212 †	—	Mini Needle Scaler	—	4,000 BPM	—	4.0 (11.19) [113]	11.4	90	12.5 (318)	2.64 (1.20)

† CE

AT401MCA

AT402MCA

AT403MCA

Specifications	AT401MCA †	AT402MCA †	AT403MCA †
Pad Size, inches (mm)	3 (76)	3 (76)	3 (76.2)
Rated Power, HP (kW)	0.25 (.19)	0.25 (.19)	0.25 (.19)
Free Speed RPM	15,000	15,000	6,000
Spindle Thread, inches	1/4-20	5/16-24 UNF	5/16-24 UNF
Air Consumption, Free Speed, CFM (SCFM) [l/min]	2.1 (15) [59]	2.1 (15) [59]	2.2 (16) [62]
Air Inlet Thread Size	1/4"-18 NPT	1/4"-18 NPT	1/4"-18 NPT
Recommended Hose Size, inches (mm)	3/8 (10)	3/8 (10)	3/8 (10)
Vibration Level, m/s²	<2.5	<2.5	<2.5
Sound Level dB(A) Pressure	84	84	86
Length, inches (mm)	4.7 (119)	5.2 (133)	5.6 (143)
Weight, lb (kg)	0.97 (0.44)	1.1 (.50)	1.3 (0.60)

† CE

AT401MCA, AT402MCA and AT403MCA Micro Series
- Powerful direct drive gear train for greater durability
- Large two-finger trigger for better control
- High quality bearings for longer tool life
- Composite housing with comfort grip insulates from cold
- Bottom handle diffused exhaust
- Variable speed trigger

AT401MCKA

AT401MCKA Micro Surface Prep Tool Kit
- Includes: AT401MCA micro surface prep tool, one 2" ROLOC® pad, one 3" *ROLOC* pad, five 2" 40 grit pads and five 3" 80 grit pads in storage case
- CE

AT402MCKA

AT402MCKA Micro Dual Action Sander Kit
- Includes: AT402MC micro sander, one 3" Hook-It® pad , (25) 3" 180 grit pads, (25) 3" 200 grit pads, ten 3" 320 grit pads and ten 3" 800 grit pads in storage case
- CE

AT403MCKA

AT403MCKA Micro Polisher Kit
- Includes: AT403MCA micro polisher, one 3" *Hook-It* pad, one 3" wool pad, and one 3" foam pad in storage case
- CE

Polisher

Specifications	AT450CP †
Pad Size, inches (mm)	7 (177)
Rated Power, HP (kW)	0.5 (0.37)
Free Speed RPM	2,500
Spindle Thread, inches	5/8"-11
Air Consumption, Free Speed, CFM (SCFM) [l/min]	3.31 (23.8) [93.72]
Air Inlet Thread Size	1/4"-18 NPT
Recommended Hose Size, inches	—
Vibration Level, m/s²	<2.5 m/S²
Sound Level dB(A) Pressure	87
Length, inches (mm)	15 (381)
Weight, lb (kg)	5 (2.27)
Standard Wool Pad	POLISHW8A
Spanner Wrench (opt.)	AT450-50H

† CE

AT450CP

AT450CP Heavy Duty Vertical Polisher
- Removeable side handle
- Includes wool pad

WARNING
- Use only accessories intended for each air tool
- Do not use accessories above their maximum rated RPM
- Read safety precautions on pages W1 to W4

AIR: FINISHING TOOLS

PT280THUGA Crud Thug® Removal Air Tool

- Quickly remove seam sealers, rust, paint and under-body coatings
- Optional rubber eraser wheel for pinstripe and graphics removal
- Easily removes automotive “crud” without fumes, heat buildup or surface damage
- Includes one fine wire wheel and one coarse wire wheel
- Thermally balanced air motor routes air between housing and liner for cooler tool temperatures and longer life
- Planetary gear system for increased torque
- Ergonomic cushion grip insulates against cold and vibration
- Adjustable exhaust outlet in rear of tool allows choice of exhaust direction
- Ten-position power/speed regulator allows easy RPM adjustment
- Paddle style trigger for precise speed control

PT280THUGA

Specifications	PT280THUGA †
Rated Power, HP (kW)	0.45 (.33)
Free Speed RPM	3,500
Air Consumption, Free Speed, CFM (SCFM) [l/min]	4 (28) [113]
Air Inlet Thread Size	1/4"-18 NPT
Recommended Hose Size, inches (mm)	3/8 (10)
Vibration Level, m/s²	2.8
Sound Level dB(A) Pressure	85
Length, inches (mm)	12 (304)
Weight, lb (kg)	2.4 (1.09)

† CE

SPPT280-300

PT280-301MP5

PT280-302MP5

PT280-303MP3

PT280-304



PT280-305

PT280-306

PT280-300-11

PT280-301-11

PT280-302-11

PT280-304-11

PT280-305-11

PT280-306-11

Stock No.	Description	Width, mm	Wheel Diameter, inches	Wire Style	Max. Safe Free Speed RPM	Applications
SPPT280-300	Hub	23 and 30	4.05	—	4,000	Use to mount 23 mm and 30 mm wheels to tool.
PT280-301MP5	Wire Wheel (coarse)	23	4.05	Bent, sharpened hardened spring steel tips	4,000	Removes sealers and coatings. Profiles steel surfaces, rough fiberglass, plastic and rubber.
PT280-302MP5	Wire Wheel (fine)	23	4.05	Straight, hardened spring steel tips	4,000	Removes light rust, paint and gasket material. Cleans contours and tight areas.
PT280-303MP3	Rubber Eraser Wheel	30	4.13	—	3,500	Removes vinyl, decals and pinstripes, along with reflective and DOT tape. Also removes molding and adhesive tape.
PT280-304	Stainless-Steel Wire Wheel (fine)	23	4.05	Straight tip stainless-steel	4,000	Removes paint, oxidation and liquid gaskets. Cleans weld seams and rivets.
PT280-305	Stainless-Steel Wire Wheel (coarse)	23	4.05	Bent tip stainless-steel	4,000	Removes paint, corrosion, cleans weld seams, burn and slag. Effective for non-ferrous metals.
PT280-306	Wire Wheel (medium)	23	4.05	Bent, sharpened spring steel tips	4,000	Removes heavy rust, paint, epoxy and marine growth. Profiles aluminum surfaces.
PT280-300-11	Hub	11	4.05	—	4,000	Use to mount 11 mm wire wheel to tool.
PT280-301-11	Wire Wheel (coarse)	11	4.05	Bent, sharpened spring steel tips	4,000	Removes sealers and coatings. Profiles steel surfaces, roughs fiberglass, plastic and rubber.
PT280-302-11	Wire Wheel (fine)	11	4.05	Straight, hardened spring steel tips	4,000	Removes light rust, paint and gasket material. Cleans contours and tight areas.
PT280-304-11	Stainless-Steel Wire Wheel (fine)	11	4.05	Straight, hardened stainless-steel tips	4,000	Removes paint, oxidation and liquid gaskets. Cleans weld seams and rivets.
PT280-305-11	Stainless-Steel Wire Wheel (coarse)	11	4.05	Bent, sharpened stainless-steel tips	4,000	Removes paint, corrosion, cleans weld seams, burn and slag. Effective for non-ferrous metals.
PT280-306-11	Wire Wheel (medium)	11	4.05	Bent, sharpened spring steel tips	4,000	Remove heavy rust, paint, epoxy and marine growth. Profiles aluminum surfaces.

THE PERFECT COMPLEMENTS.

Nothing complements your Snap-on® power tools like our full range of accessories. Add our Blue-point® accessories for more productivity, durability, control and power.

IT ALL ADDS UP.

You can add any number of accessories to your *Snap-on* power tools – and that helps optimize the progress in your shop.

Hardened Drill Bits — Resist breakage and get the most out of your drill.

Premium-Grade Oil — Better lubrication means longer tool life.

Air Hoses — Extremely lightweight for maneuverability.

Protective Boots — Protect your investment with a wide range of power tool boots.

AIR/CORDLESS TOOL BOOTS

MG725BOOT

MG325OBOOT

YA888

PH3050BOOT

CT4410AGBOOT

YA969

Air/Cordless Boots

Description		Air Tool Stock No.	Stock No.
Air Impact Wrench Boots	3/4" Sq. Drive	AT670	AT670BOOT
		AT760	AT760BOOT
		AT775/AT775L	YA979
		MG1200/MG1250 Series	MG1200BOOT
	1/2" Sq. Drive	AT123 Series	AT123-45
		AT500C/AT500D	YA972
		AT555/AT555A Series	AT531-25
		AT5500	AT5500BOOT
		AT570	AT570BOOT
		MG725 Series	MG725BOOT MG725GBOOT MG725OBOOT
	3/8" Sq. Drive	AT321	AT321-44
		AT351	—
		AT355A	YA977
		AT360	AT360-25
		AT370	AT370BOOT
		MG325 Series	MG325BOOT MG325GBOOT MG325OBOOT
	1/4" Sq. Drive	AT225B Series	YA975
Air Drill Boots	3/8" Capacity	AT5000	AT5000BOOT
		AT3000	AT3000BOOT

Description		Air Tool Stock No.	Stock No.
Air Ratchet Boots	1/2" Sq. Drive	AT705 Series	AT700E49A
	3/8" Sq. Drive	AT205 Series	AT200D22A
		AT700 Series/AT702	AT700E49A
		ETB14460A	YA889A
		FAR7000	FAR7000BOOT
		FAR7200, FAR72B, FAR72C	YA889A
		PTR205A	YA905
		PTR215A	YA905
		PTR225A	YA905
	1/4" Sq. Drive	AT200 Series	AT200D22A
		FAR25, FAR25A	YA888
		PTR200A, FAR2500, FAR2505	YA905
Air Hammer Boots	—	AT2050	AT2050BOOT
		PH3050/PH3050A/ PH3050B	PH3050BOOT
Cordless Impact Wrench Boots	1/2" Sq. Drive	CT8850/CT6818 Series	CT8850BOOT
			CT8850GBOOT
			CT8850OBOOT
		CT8815/CT4415 Series	CT8810BOOT
			CT8810GBOOT
			CT8810OBOOT
		CT7850 Series	CT7850BOOT
		CT4850/CT6850/6855 Series	CT4850BOOT
			CT6850GBOOT
			CT6850OBOOT
		CT3450/CT3850 Series	YA982
	3/8" Sq. Drive	CT8810/CT4418 Series	CT8810BOOT
			CT8810GBOOT
			CT8810OBOOT
		CT4410A Series	CT4410BOOT
			CT4410AGBOOT
			CT4410AOBOOT
		CT30 Series	YA968
		CT310 Series	YA982
		CT3110, CT3110HP Series	YA969
Battery Boots	18V	CTB4185/CTB4187 Series	CTB4185BOOT
		CTB7185/CTB8185	CTB7185BOOT
	14.4V	CTB4145/CTB4147 Series	CTB4145BOOT

Magnetic Power Nut Drivers

PTNDM4KA

- Magnets keep ferrous metal fasteners positioned in driver
- High grade alloy material for long lasting durability
- Storage case to keep tools organized under hood and bench work

Applications: Under dash

PTND4KA Magnetic Power Nut Setter Set, inch (4pc)
Includes: 1/4", 5/16", 3/8" and 1/2" nut setters.

PTNDM4KA Magnetic Power Nut Setter Set, Metric (4pc)
Includes: 8 mm, 10 mm, 12 mm and 14 mm nut setters.

CTS561BITSET

Quick Change Bit Set

CTS561BITSET

- For Snap-on® cordless screwdrivers plus other power drivers
- Quick change hex saves time changing bits
- Includes 22 bits (all 3" long) plus a 1/4" square drive (2" long)
- Storage case included

Set Includes:

Phillips® Bits	Flat Tip Bits	TORX® Bits	Hex Bits
#0, #1, #2	5/32", 3/16", 7/16", 1/4", 9/32"	T10, T15, T20, T25, T27, T30, T40	3/32", 7/64", 1/8", 5/32", 3/16", 7/32", 1/4"

PTB32K Power Bit Set

PTB32K

- Ideal for use with cordless drills and screwdrivers, includes (30) 1/4" hex shank bits plus two adaptors
- Storage case clearly indicates bit type and size

Set Includes:

Flat Tip Bits	Hex Bits	*Phillips* Bits	POZIDRIV® Bits	*TORX* Tamper Resistant Bits	Square Bits	Adaptors
5/32", 3/16", 7/32", 1/4", 9/32"	3/32", 7/64", 1/8", 5/32", 3/16", 7/32", 1/4"	#0, #1, #2, #3	#0, #1, #2, #3	T10, T15, T20, T25, T27, T30, T40	#0, #1, #2	1/4" hex male to 1/4" square male, 1/4" hex Quick Change Coupler

YA52PBSQC

YA52PBSQC Power Bit Set (Blue-Point®)

- Ideal for use with cordless drills and screwdrivers
- Includes 49 1/4" hex shank bits in short and long lengths, two hex adaptors and quick change chuck
- Storage case holds all components

Set Includes:

Flat Tip Bits (Short)	Flat Tip Bits (Long)	Hex Bits (Short)	Hex Bits (Long)	Phillips® Bits (Short)	*Phillips* Bits (Long)	TORX® Tamper Resistant Bits (Short and Long)	Square Bits (Short and Long)	Clutch Bits (Short and Long)	Double End Bits	Adaptors
5–6, 6–8, 8–10 (2 each), 10–12	6–8, 8–10, 10–12	1/8", 9/64", 5/32", 3/16", 7/32", 1/4", 9/32"	5/32", 3/16", 7/32"	#1, #2 (2 each), #3	#1, #2, #3	T10, T15, T20, T25, T27, T30, T40	#1, #2, #3	5/32", 3/16"	6–8 x #2 *Phillips*, 8–10 x #3 *Phillips*	1/4" hex female to 1/4" hex female, 1/4" hex male to 1/4" square male, 1/4" hex Quick Change Chuck

Double Square Bit

BTSS620 Double Square Power Bit

- Provide extra clearance and minimize tool contact with work surface
- Minimize potential damage to painted panels on RVs and trailers
- Ideal for use with all types of drills
- 6" long

BTSS620

DC15014

DCA500

AT3000-26

PDAH1A

DCBP500

DC150

Stock No.	Description	Use On	Size	Thread Size	Capacity	Includes Chuck Key
DC15014	Drill Chuck	General Use	1/4"	—	—	—
DC15038	Drill Chuck	General Use	3/8"	—	—	—
DCA375	Drill Chuck	AT3000	3/8"	3/8"-24	1/32"–3/8"	PD3A3
DCA500	Drill Chuck	AT5000	1/2"	1/2"-20	1/16"–1/2"	PD30-3
AT3000-26	Keyless Drill Chuck	AT3000	3/8"	3/8"-24	1/32"–3/8"	—
AT5000-6	Drill Chuck	AT5000	1/2"	1/2"-20	1/16"–1/2"	—
DCBP500	Keyless Drill Chuck	AT5000	1/2"	1/2"-20	1/16"–1/2"	—
DC208881	Drill Chuck	—	3/8"	3/8"-24	1/32"–3/8"	DC205989
DC666574	Drill Chuck	—	3/8"	3/8"-24	1/32"–3/8"	DC500516
DC666575	Drill Chuck	—	1/2"	1/2"-20	1/16"–1/2"	DC500516
DC666582	Drill Chuck	—	3/8"	3/8"-24	1/32"–3/8"	DC1125623
PD30-3	Chuck Key	AT5000	—	—	—	—
PD3A3	Chuck Key	PDR3A, AT800	—	—	—	—
AT5000-6-1	Chuck Key	AT5000	—	—	—	—
DC205989	S2A Chuck Key	DC208881	—	—	—	—
DC500516	S9 Chuck Key	DC666574, DC666575	—	—	—	—
DC1125623	S8 Chuck Key	DC666582	—	—	—	—

DC150 Chuck Set

- Includes 1/4" and 3/8" drill chucks, a chuck key and a set of five stubby drill bits in 1/8", 3/16", 1/4", 5/16" and 3/8" sizes
- Packaged in a storage case

PDAH1A Auxiliary Handle

- Provides two-handed power and control when used in conjunction with air drills

WARNING • Read safety precautions on pages W1 to W4

DRILL BITS

THUNDERBIT®/Cobalt Jobber Length 135° Split Point



- For drilling at higher speeds in tougher drilling conditions
- Feature 135° split points for easier drill starting without the need for center punching
- Heavy duty web construction for higher strength and less breakage
- Improved chip ejection through a specially engineered flute design

DBTBC121

DBTBC129

Stock No.	Size, inches	Stock No.	Size, inches
DBTBC1/16	1/16	DBTBC19/64	19/64
DBTBC5/64	5/64	DBTBC5/16	5/16
DBTBC3/32	3/32	DBTBC21/64	21/64
DBTBC7/64	7/64	DBTBC11/32	11/32
DBTBC1/8	1/8	DBTBC23/64	23/64
DBTBC9/64	9/64	DBTBC3/8	3/8
DBTBC5/32	5/32	DBTBC25/64	25/64
DBTBC11/64	11/64	DBTBC13/32	13/32
DBTBC3/16	3/16	DBTBC27/64	27/64
DBTBC13/64	13/64	DBTBC7/16	7/16
DBTBC7/32	7/32	DBTBC29/64	29/64
DBTBC15/64	15/64	DBTBC15/32	15/32
DBTBC1/4	1/4	DBTBC31/64	31/64
DBTBC17/64	17/64	DBTBC1/2	1/2
DBTBC9/32	9/32	–	—

DBTBC121 *THUNDERBIT* Cobalt Drill Bit Set
DBTBC1/16 through DBTBC3/8 (21 bits) in B121B metal drill index.

DBTBC129 *THUNDERBIT* Cobalt Drill Bit Set
DBTBC1/16 through DBTBC1/2 (29 bits) in B129B metal drill index.

THUNDERBIT/High Speed Steel Jobber Length 135° Split Point

- Industrial grade steel with bronze oxide surface treatment
- Bits will drill at higher speeds in tougher drilling conditions
- 135° split points for easier drill starting without the need for center punching
- Heavy duty web construction for higher strength and less breakage
- Improved chip ejection through a specially engineered flute design

DBTB121

DBTB129

Stock No.	Size, inches	Stock No.	Size, inches
DBTB1/16	1/16	DBTB19/64	19/64
DBTB5/64	5/64	DBTB5/16	5/16
DBTB3/32	3/32	DBTB21/64	21/64
DBTB7/64	7/64	DBTB11/32	11/32
DBTB1/8	1/8	DBTB23/64	23/64
DBTB9/64	9/64	DBTB3/8	3/8
DBTB5/32	5/32	DBTB25/64	25/64
DBTB11/64	11/64	DBTB13/32	13/32
DBTB3/16	3/16	DBTB27/64	27/64
DBTB13/64	13/64	DBTB7/16	7/16
DBTB7/32	7/32	DBTB29/64	29/64
DBTB15/64	15/64	DBTB15/32	15/32
DBTB1/4	1/4	DBTB31/64	31/64
DBTB17/64	17/64	DBTB1/2	1/2
DBTB9/32	9/32	–	—

DBTB121 *THUNDERBIT* High Speed Drill Bit Set
DBTB1/16 through DBTB3/8 (21 bits) in B121B metal drill index.

DBTB129 Drill Bit Set
DBTB1/16 through DBTB1/2 (29 bits) in B129B metal drill index.

High Speed Mechanic's Length 135° Point with 3 Flat Shank

DBTR11

DBTR129

Stock No.	Size, inches	Stock No.	Size, inches	Stock No.	Size, inches
DBTR1/16	1/16	DBTR7/32	7/32	DBTR3/8	3/8
DBTR5/64	5/64	DBTR15/64	15/64	DBTR25/64	25/64
DBTR3/32	3/32	DBTR1/4	1/4	DBTR13/32	13/32
DBTR7/64	7/64	DBTR17/64	17/64	DBTR27/64	27/64
DBTR1/8	1/8	DBTR9/32	9/32	DBTR7/16	7/16
DBTR9/64	9/64	DBTR19/64	19/64	DBTR29/64	29/64
DBTR5/32	5/32	DBTR5/16	5/16	DBTR15/32	15/32
DBTR11/64	11/64	DBTR21/64	21/64	DBTR31/64	31/64
DBTR3/16	3/16	DBTR11/32	11/32	DBTR1/2	1/2
DBTR13/64	13/64	DBTR23/64	23/64	–	—

DBTR11 Drill Bit Set
DBTR1/16, DBTR3/32, DBTR1/8, DBTR5/32, DBTR3/16, DBTR7/32, DBTR1/4, DBTR9/32, DBTR5/16, DBTR11/32 and DBTR3/8 (11 bits) in a kit bag.

DBTR129 Drill Bit Set
DBTR1/16 through DBTR1/2 (29 bits) in B129B metal drill index.



Jobber Length 118° Point

Stock No.	Size, inches	Stock No.	Size, inches
DBF1/16C	1/16	DBF19/64C	19/64
DBF5/64C	5/64	DBF5/16C	5/16
DBF3/32C	3/32	DBF21/64C	21/64
DBF7/64C	7/64	DBF11/32C	11/32
DBF1/8C	1/8	DBF23/64C	23/64
DBF9/64C	9/64	DBF3/8C	3/8
DBF5/32C	5/32	DBF25/64C	25/64
DBF11/64C	11/64	DBF13/32C	13/32
DBF3/16C	3/16	DBF27/64C	27/64
DBF13/64C	13/64	DBF7/16C	7/16
DBF7/32C	7/32	DBF29/64C	29/64
DBF15/64C	15/64	DBF15/32C	15/32
DBF1/4C	1/4	DBF31/64C	31/64
DBF1764C	17/64	DBF1/2C	1/2
DBF9/32C	9/32	–	—

DB129C Drill Bit Set
DBF1/16C through DBF1/2C (29 bits) in B129C metal drill index.

DB121C Drill Bit Set
DBF1/16C through DBF3/8C (21 bits) in B121C metal drill index.

DB113C Drill Bit Set
DBF1/16C through DBF1/4C (13 bits) in B113B metal drill index.

DB129C

DB121C

DB113C

Jobber Length Letter Size 118° Point

Stock No.	Size, inches	Stock No.	Size, inches
DBAA1A	.234 (A)	DBAA1N	.302 (N)
DBAA1B	.238 (B)	DBAA1O	.316 (O)
DBAA1C	.242 (C)	DBAA1P	.323 (P)
DBAA1D	.246 (D)	DBAA1Q	.332 (Q)
DBAA1E	.250 (E)	DBAA1R	.339 (R)
DBAA1F	.257 (F)	DBAA1S	.348 (S)
DBAA1G	.261 (G)	DBAA1T	.358 (T)
DBAA1H	.266 (H)	DBAA1U	.368 (U)
DBAA1I	.272 (I)	DBAA1V	.377 (V)
DBAA1J	.277 (J)	DBAA1W	.386 (W)
DBAA1K	.281 (K)	DBAA1X	.397 (X)
DBAA1L	.290 (L)	DBAA1Y	.404 (Y)
DBAA1M	.295 (M)	DBAA1Z	.413 (Z)

DBA126B Letter Drill Bit Set
DBAA1A through DBAA1Z (26pc) (.234"–.413") in B126C metal index.

DBA126B

Jobber Length Metric Size 118° Point

Stock No.	Size, mm	Stock No.	Size, mm
DBM1A	1	DBM7.5A	7.5
DBM1.5A	1.5	DBM8A	8
DBM2A	2	DBM8.5A	8.5
DBM2.5A	2.5	DBM9A	9
DBM3A	3	DBM9.5A	9.5
DBM3.5A	3.5	DBM10A	10
DBM4A	4	DBM10.5A	10.5
DBM4.5A	4.5	DBM11A	11
DBM5A	5	DBM11.5A	11.5
DBM5.5A	5.5	DBM12A	12
DBM6A	6	DBM12.5A	12.5
DBM6.5A	6.5	DBM13A	13
DBM7A	7	–	—

DBM125C Metric Drill Bit Set
DBM1A through DBM13A (25pc) (1 mm–13 mm) in B125C metal index.

DBM125C

WARNING • Read safety precautions on pages W1 to W4

WIRE GAUGE DRILL BITS

DBC260A

DB120C

Wire Gauge 118° Point (Cobalt and High Speed Steel)

Cobalt	High Speed Steel	Decimal Equiv., inches	Length, inches	Cobalt	High Speed Steel	Decimal Equiv., inches	Length, inches
DBCE1A	DBE1B	.2280	3 7/8	DBCE41A	DBE41B	.0960	2 3/8
DBCE2A	DBE2B	.2210	3 7/8	DBCE42A	DBE42B	.0935	2 1/4
DBCE3A	DBE3B	.2130	3 3/4	DBCE43A	DBE43B	.0890	2 1/4
DBCE4A	DBE4B	.2090	3 3/4	DBCE44A	DBE44B	.0860	2 1/8
DBCE5A	DBE5B	.2055	3 3/4	DBCE45A	DBE45B	.0820	2 1/8
DBCE6A	DBE6B	.2040	3 3/4	DBCE46A	DBE46B	.0810	2 1/8
DBCE7A	DBE7B	.2010	3 5/8	DBCE47A	DBE47B	.0785	2
DBCE8A	DBE8B	.1990	3 5/8	DBCE48A	DBE48B	.0760	2
DBCE9A	DBE9B	.1960	3 5/8	DBCE49A	DBE49B	.0730	2
DBCE10A	DBE10B	.1935	3 5/8	DBCE50A	DBE50B	.0700	2
DBCE11A	DBE11B	.1910	3 1/2	DBCE51A	DBE51B	.0670	2
DBCE12A	DBE12B	.1890	3 1/2	DBCE52A	DBE52B	.0635	1 7/8
DBCE13A	DBE13B	.1850	3 1/2	DBCE53A	DBE53B	.0595	1 7/8
DBCE14A	DBE14B	.1820	3 3/8	DBCE54A	DBE54B	.0550	1 7/8
DBCE15A	DBE15B	.1800	3 3/8	DBCE55A	DBE55B	.0520	1 7/8
DBCE16A	DBE16B	.1770	3 3/8	DBCE56A	DBE56B	.0465	1 3/4
DBCE17A	DBE17B	.1730	3 3/8	DBCE57A	DBE57B	.0430	1 3/4
DBCE18A	DBE18B	.1695	3 1/4	DBCE58A	DBE58B	.0420	1 5/8
DBCE19A	DBE19B	.1660	3 1/4	DBCE59A	DBE59B	.0410	1 5/8
DBCE20A	DBE20B	.1610	3 1/4	DBCE60A	DBE60B	.0400	1 5/8
DBCE21A	DBE21B	.1590	3 1/4	–	DBE61B	.0390	1 5/8
DBCE22A	DBE22B	.1570	3 1/8	–	DBE62B	.0380	1 1/2
DBCE23A	DBE23B	.1540	3 1/8	–	DBE63B	.0370	1 1/2
DBCE24A	DBE24B	.1520	3 1/8	–	DBE64B	.0360	1 1/2
DBCE25A	DBE25B	.1495	3	–	DBE65B	.0350	1 1/2
DBCE26A	DBE26B	.1470	3	–	DBE66B	.0330	1 3/8
DBCE27A	DBE27B	.1440	3	–	DBE67B	.0320	1 3/8
DBCE28A	DBE28B	.1405	2 7/8	–	DBE68B	.0310	1 3/8
DBCE29A	DBE29B	.1360	2 7/8	–	DBE69B	.0292	1 3/8
DBCE30A	DBE30B	.1285	2 3/4	–	DBE70B	.0280	1 1/4
DBCE31A	DBE31B	.1200	2 3/4	–	DBE71B	.0260	1 1/4
DBCE32A	DBE32B	.1160	2 3/4	–	DBE72B	.0250	1 1/8
DBCE33A	DBE33B	.1130	2 5/8	–	DBE73B	.0240	1 1/8
DBCE34A	DBE34B	.1110	2 5/8	–	DBE74B	.0225	1
DBCE35A	DBE35B	.1100	2 5/8	–	DBE75B	.0210	1
DBCE36A	DBE36B	.1065	2 1/2	–	DBE76B	.0200	7/8
DBCE37A	DBE37B	.1040	2 1/2	–	DBE77B	.0180	7/8
DBCE38A	DBE38B	.1015	2 1/2	–	DBE78B	.0160	7/8
DBCE39A	DBE39B	.0995	2 3/8	–	DBE79B	.0145	3/4
DBCE40A	DBE40B	.0980	2 3/8	–	DBE80B	.0135	3/4

DBC260A Cobalt Drill Bit Set
DBCE1A through DBCE60A (60pc) (.2280"–.0400") in a B160C metal index.

DB160C High Speed Drill Bit Set
DBE1B through DBE60B (60pc) (.2280"–.0400") in a B160C metal index.

DB120C High Speed Drill Bit Set
DBE61B through DBE80B (20pc) (.0390"–.0135") in a metal index.

DBBPC21

Jobber Length 135° Split Point (Cobalt)

Stock No.	Size, inches	Stock No.	Size, inches
DBBPC1/16	1/16	DBBPC15/64	15/64
DBBPC5/64	5/64	DBBPC1/4	1/4
DBBPC3/32	3/32	DBBPC17/64	17/64
DBBPC7/64	7/64	DBBPC9/32	9/32
DBBPC1/8	1/8	DBBPC19/64	19/64
DBBPC9/64	9/64	DBBPC5/16	5/16
DBBPC5/32	5/32	DBBPC21/64	21/64
DBBPC11/64	11/64	DBBPC11/32	11/32
DBBPC3/16	3/16	DBBPC23/64	23/64
DBBPC13/64	13/64	DBBPC3/8	3/8
DBBPC7/32	7/32	–	—

DBBPC21 Cobalt Drill Bit Set
DBBPC1/16 through DBBPC3/8 (21pc) (1/16"–3/8") in metal drill bit index.

DBBP21

Jobber Length 135° Split Point (High Speed Steel)

Stock No.	Size, inches	Stock No.	Size, inches
DBBP1/16	1/16	DBBP15/64	15/64
DBBP5/64	5/64	DBBP1/4	1/4
DBBP3/32	3/32	DBBP17/64	17/64
DBBP7/64	7/64	DBBP9/32	9/32
DBBP1/8	1/8	DBBP19/64	19/64
DBBP9/64	9/64	DBBP5/16	5/16
DBBP5/32	5/32	DBBP21/64	21/64
DBBP11/64	11/64	DBBP11/32	11/32
DBBP3/16	3/16	DBBP23/64	23/64
DBBP13/64	13/64	DBBP3/8	3/8
DBBP7/32	7/32	–	—

DBBP21 HSS Drill Bit Set
DBBP1/16 through DBBP3/8 (21pc) (1/16"–3/8") in metal drill bit index.

DBBPT13

135° Split Point (High Speed Steel) (Titanium Coated)

Stock No.	Size, inches
DBBPT1/16	1/16
DBBPT5/64	5/64
DBBPT3/32	3/32
DBBPT7/64	7/64
DBBPT1/8	1/8
DBBPT9/64	9/64
DBBPT5/32	5/32
DBBPT11/64	11/64
DBBPT3/16	3/16
DBBPT13/64	13/64
DBBPT7/32	7/32
DBBPT15/64	15/64
DBBPT1/4	1/4

DBBPT13 Titanium Coated Steel Drill Bit Set
DBBPT1/16 through DBBPT1/4 (13pc) (1/16"–1/4") in metal drill bit index.

SPECIALIZED DRILL BITS

DBCL105A

Left Hand Fractional Drill Bits (Cobalt)

Stock No.	Size, inches
DBCL5/64A	5/64
DBCL7/64A	7/64
DBCL5/32A	5/32
DBCL3/16	3/16
DBCL1/4A	1/4
DBCL9/32	9/32
DBCL19/64A	19/64
DBCL5/16	5/16
DBCL11/32	11/32
DBCL3/8	3/8
DBCL13/32	13/32
DBCL7/16	7/16
DBCL15/32	15/32
DBCL1/2	1/2

DBCL105A Left Hand Drill Bit Set
DBCL5/64, DBCL7/64, DBCL5/32, DBCL1/4 and DBCL19/64 drill bits (5pc) in a plastic pouch.

DBLS105A

Left Hand Fractional Drill Bits (High Speed Steel)

- Use left hand drill bits to make a hole in the broken screw before the extractor is inserted
- Left hand drill bits tend to loosen screws for easier removal

Stock No.	Size, inches	Flute Length, inches	Overall Length, inches
DBLS1/8A	1/8	1 3/8	3
DBLS3/16A	3/16	2	3 1/2
DBLS1/4A	1/4	2 1/2	4
DBLS5/16A	5/16	2 5/8	4 1/2
DBLS11/32A	11/32	2 3/4	4 1/2

DBLS105A Left Hand Drill Bit Set
DBLS1/8 through DBLS11/32 (5pc) in a plastic pouch.

DBH11B

Hex Shank

- Shank hex size is 1/4"

Stock No.	Size, inches
DBH1/16B	1/16
DBH3/32B	3/32
DBH1/8B	1/8
DBH5/32B	5/32
DBH3/16B	3/16
DBH7/32B	7/32
DBH1/4BB	1/4
DBH9/32B	9/32
DBH5/16B	5/16
DBH11/32B	11/32
DBH3/8B	3/8

DBH7B Hex Shank Drill Bit Set
- Includes DBH1/16B through DBH1/4BB (1/16"–1/4") (7pc) in DBH7B-1 kit bag

DBH11B Hex Shank Drill Bit Set
- Includes DBH1/16B through DBH3/8B (1/16"–3/8") (11pc) in DBH11B-1 kit bag

WARNING • Read safety precautions on pages W1 to W4

SPECIALIZED DRILL BITS



DBD1/4A

DBD110A

DBD1/8AMP10

DBK7A

CSE485B

YA409

Kit includes:
YA409 Drive unit; Chucking spud
YA409-316M 3/16" bit, 1 1/4" long
YA409-18L 1/8" bit, 2 1/8" long
YA409-332L 3/32" bit, 2 1/8" long
YA409-18M 1/8" bit, 1 1/4" long
YA409-532M 5/32" bit, 1 1/4" long
YA409-18S 1/8" bit, 3/4" long
YA409-15 Storage Case

Double Ended 135° Split Point

- DBD7/64A through DBD30A (10pc)
- (7/64" to #30) in a plastic pouch

Set Contains: DBD110A

Stock No.	Size	
DBD7/64A	7/64"	•
DBD1/8A	1/8"	•
DBD9/64A	9/64"	•
DBD5/32A	5/32"	•
DBD3/16A	3/16"	•
DBD7/32A	7/32"	•
DBD1/4A	1/4"	•
DBD11A	#11	•
DBD20A	#20	•
DBD30A	#30	•

DBD1/8AMP10 Double Ended Drill Bit (10 pack)
10 pack of DBD1/8A drill bits

Aircraft Length 135° Split Point

Extra long bits for drilling thick materials.

Set Contains: DBK7A

Stock No.	Size, inches	Flute Length, inches	Length, inches	
DBT1/8A	1/8	1 5/8	12	•
DBT3/16A	3/16	2 1/4	12	•
DBT1/4A	1/4	2 3/4	12	•
DBT5/16A	5/16	3 1/4	12	•
DBT3/8A	3/8	3 3/4	12	•
DBT7/16A	7/16	4	12	•
DBT1/2A	1/2	4 1/2	12	•

1/2" Reduced Shank Drill Bits 118° Point

- Ideal for cutting in low and medium tensile strength materials
- Flatted shank provides a more secure grip for the drill chuck

Stock No.	Size, inches
CSE345B	17/32
CSE365B	9/16
CSE375*	37/64
CSE385B	19/32
CSE405B	5/8
CSE425B	21/32
CSE445B	11/16
CSE465B	23/32
CSE475*	45/64
CSE485B	3/4
CSE505B	25/32
CSE525B	13/16
CSE565B	7/8
CSE575*	59/64
CSE605B	15/16
CSE645B	1

*Use with TDP6 pipe tap set.

90° Angle Drill Bits

Size	2 1/8" Long Bit Stock No.	1 1/4" Medium Bit Stock No.	3/4" Short Bit Stock No.
#10	YA409-10L	YA409-10M	YA409-10S
#11	–	–	YA409-11S
#13	–	–	YA409-13S
#20	–	–	YA409-20S
#21	–	–	YA409-21S
#27	–	–	YA409-27S
#30	YA409-30L	YA409-30M	YA409-30S
#40	YA409-40L	YA409-40M	YA409-40S
3/32"	YA409-332L	YA409-332M	YA409-332S
1/8"	YA409-18L	YA409-18M	YA409-18S
5/32"	YA409-532L	YA409-532M	YA409-532S
3/16"	YA409-316L	YA409-316M	YA409-316S
1/4"	YA409-14L	YA409-14M	YA409-14S

YA409 90° Angle Drill Kit
- Allows drilling up to 1/4" holes in confined areas by positioning the bit at a 90° angle to the drill
- Threaded drill bits provide consistent concentricity and eliminate slippage

YA409-6 Threaded Collet
Allows the use of 1/4" diameter shank grinding burrs and abrasive wheels.

Titanium Nitride Step Drills

- Titanium nitride coating creates a surface hardness that makes these tools last four to five times longer than ordinary drill bits
- Surface coating also reduces friction, resulting in a tool that runs cooler while running dry

YA1TA

Stock No.	Size Range	Increments	Shank Size	Hole Sizes Per Bit	Length, inches
YA1TA	1/8"–1/2"	1/32"	1/4"	13	3 1/4
YA2TA	3/16"–1/2"	1/16"	1/4"	6	3 1/4
YA3TA	1/4"–3/4"	1/16"	3/8"	9	2 5/8
YA4TA	3/16"–7/8"	1/16"	3/8"	12	3
YA1MTA	4–12 mm	1 mm	1/4"–6.5 mm	9	3 1/4
YA3MTA	6–18 mm	2 mm	3/8"–10 mm	7	2 5/8
YA4MTA	4–22 mm	2 mm	3/8"–10 mm	10	3
YA5MTA	5–35 mm	2–3 mm	1/2"–13 mm	13	3 3/32

YA263A

Step Drills

Stock No.	Size Range, inches	Increments, inches	Shank Size, inches	Hole Sizes Per Bit	Length, inches	Set Contains: YAS203A
YA261A	1/8–1/2	1/32	1/4	13	3 1/4	•
YA262A	3/16–1/2	1/16	1/4	6	3 3/8	•
YA265A	3/8	—	1/4	1	1 5/8	
YA263A	1/4–3/4	1/16	3/8	9	2 5/8	•
YA267A	3/16–7/8	1/16	3/8	12	3	
YA266A	9/16–1	1/16	1/2	8	2 1/2	

Hole Saws and Arbors

- High speed cutting edge welded to an alloy steel back to absorb shocks
- Cut clean, accurate holes in steel and cast iron pipe, steel plates, aluminum, copper, brass, stainless-steel, wood or plastic
- Side slits make it easy to knock out the spent disks

Stock No.	Dia., inches	Recommended Arbors	Stock No.	Dia., inches	Recommended Arbors
LHS18D	9/16	LHS1C, LHS6C	LHS48D	1 1/2	LHS3D
LHS20D	5/8	LHS1C, LHS6C	LHS50D	1 9/16	LHS3D
LHS22D	11/16	LHS1C, LHS6C	LHS52D	1 5/8	LHS3D
LHS24D	3/4	LHS1C, LHS6C	LHS54D	1 11/16	LHS3D
LHS26D	13/16	LHS1C, LHS6C	LHS56D	1 3/4	LHS3D
LHS28D	7/8	LHS1C, LHS6C	LHS58D	1 13/16	LHS3D
LHS30D	15/16	LHS1C, LHS6C	LHS60D	1 7/8	LHS3D
LHS32D	1	LHS1C, LHS6C	LHS64D	2	LHS3D
LHS34D	1 1/16	LHS1C, LHS6C	LHS66D	2 1/16	LHS3D
LHS36D	1 1/8	LHS1C, LHS6C	LHS68D	2 1/8	LHS3D
LHS38D	1 3/16	LHS1C, LHS6C	LHS72D	2 1/4	LHS3D
LHS40D	1 1/4	LHS3D	LHS76D	2 3/8	LHS3D
LHS42D	1 5/16	LHS3D	LHS80D	2 1/2	LHS3D
LHS44D	1 3/8	LHS3D	LHS88D	2 3/4	LHS3D
LHS46D	1 7/16	LHS3D	LHS96D	3	LHS3D

LHS18D

LHS48D

LHS64D

LHS608B

LHS606D

LHS608B Hole Saw and Arbor Kit
Includes LHS44D, LHS48D, LHS56D, LHS64D, LHS80D and LHS96D hole saws plus LHS6C and LHS3D arbors and LHS8C arbor adaptor (9pc) in storage case. Recommended speed charts are included.

LHS606D Hole Saw and Arbor Kit
Includes LHS24D, LHS28D, LHS32D, LHS36D and LHS40D hole saws plus LHS6C arbor and LHS8C arbor adaptor (7pc) in storage case. Recommended speed charts are included.

Hole Saw Arbors and Pilot Drills

Stock No.	Thread Size	Fits Saws, inches	Fits Drill Chucks, inches	Replacement Pilot Drill
LHS5C	1/2"-20	9/16–1 3/16	1/4	LHS4D
LHS6C	1/2"-20	9/16–1 3/16	3/8	LHS4D
LHS1C	1/2"-20	9/16–1 3/16	1/2	LHS4D
LHS3D	5/8"-18	1 1/4–6	3/8	LHS4D
LHS8C	Arbor adaptor to convert 1/2"-20 thread to 5/8"-18			

LHS5C

LHS6C

LHS1C

LHS3D

LHS8C

WARNING • Read safety precautions on pages W1 to W4

DRILLING ACCESSORIES

R120

DEBUR300

CL6

YA246A

R120 Tapered Reamer
- Tapers from 1/8"–1/2"
- Ideal for removing burrs and enlarging holes
- Includes crossbar

R121 Tapered Reamer
- Tapers from 1/2"–1"
- Similar to R120 but has a 3/8" square head for use with socket wrenches when extra torque is required

DEBUR300 Deburring Tool
- Easily deburr drilled and machined holes
- Pushbutton locking collet enables quick, easy blade changes
- Includes three round head deburring blades
- Blades store in handle of tool
- Weighs 1 lb
- 6" long

CL6 Cutting Oil
- Superior antiweld and lubricating properties reduce heat buildup in drill bits, grinding burrs and other metal cutting tools
- 1 pt bottle

YA246A Micro Utility Drill Set
- Knurled surface at chuck end of pin vise provides a sure gripping surface
- Long 1 7/8" drill length
- Includes pin vise and 12 precision HSS twist drills from .0635"–.0225", numbers 52–74

Applications: Fuel injectors, fuel lines, welding and soldering torch tips, shower heads, water jets, electronics and hobbies.

SANDER ACCESSORIES

PS4612-1AH

PS4612V-1AH

PSV4312KIT PSV4612KIT

PS468-34V

PS468-34HL

YA7341

Replacement Pads

Stock No.	Size, inches	Type	Style	Use on:
PS4312-1H	3	PSA	Vacuum/Non-vacuum	PSF4312
PS4312-2H	3	Velcro®	Vacuum/Non-vacuum	PSF4312
PS4512-1AH	5	PSA	Non-vacuum	PS4512
PS4512V-1AH	5	PSA	Vacuum	PS4512
PS4512-2H	5	*Velcro*	Non-vacuum	PS4512
PS4512V-2H	5	*Velcro*	Vacuum	PS4512
PS4612-1AH	6	PSA	Non-vacuum	PS4612 & PSF4612
PS4612V-1AH	6	PSA	Vacuum	PS4612 & PSF4612
PS4612-2H	6	*Velcro*	Non-vacuum	PS4612 & PSF4612
PS4612V-2H	6	*Velcro*	Vacuum	PS4612 & PSF4612

Vacuum Adaptor Kits (contains vacuum adaptor & shroud)		
PSV4312KIT	Vacum Kit for 3" Sanders	PSF4312
PSV4612KIT	Vacuum Kit, 5" & 6" Sanders	PS4512, PS4612 & PSF4612

Stock No.	Size, inches	Type	Style	Use on:
PS468-34	6	PSA	Non-vacuum	PS4609
PS468-34V	6	PSA	Vacuum	PS4609V
PS468-34HL	6	*Velcro*	Non-vacuum	PS4609
PS468-34VHL	6	*Velcro*	Vacuum	PS4609V
PS468-35	8	PSA	Non-vacuum	PS4809
PS468-35V	8	PSA	Vacuum	PS4809V
PS468-35HL	8	*Velcro*	Non-vacuum	PS4809
PS468-35VHL	8	*Velcro*	Vacuum	PS4809V
AT116-3	2	Roloc®	Non-vacuum	AT401MCA
AT116-4	3	*Roloc*	Non-vacuum	AT401MCA
AT402VEL75MM	3	*Velcro*	Non-vacuum	AT402MCA & AT403MCA
AT406B33	6	PSA	Non-vacuum	AT406B
AT406B30	6	*Velcro*	Non-vacuum	AT406B

Tune-up Kits (contains seals, o-rings, washers, valve, rotor & vanes)		
PS46-TK	Tune-up Kit for 5" & 6" Sanders	PS4512, PS4612 & PSF4612

YA7341 Bonnet Cleaning Tool
- Run the spur wheels over your buffing pad or bonnet and it will work to dislodge and remove dry, hardened polish

Micro Tool Accessory Kits

AT401ACCKIT

AT401ACCKIT Micro Surface Prep Accessory Kit
- 1/4 turn abrasive disc in two different grits helps get the job of removing rust or gasket material done quickly, even in confined areas
- Kit contains all the consumables needed to restore a Micro Surface Prep Tool Kit back to new
- Kit includes one 2" *ROLOC* Pad 1/4" x 20T, one 3" *ROLOC* Pad 1/4" x 20T, five 2" 40 grit pads and five 3" 80 grit pads

AT402ACCKIT

AT402ACCKIT Micro Dual Action Sander Accessory Kit
- Fresh backing pad with all the sanding disc needed to work the surface down until it is ready for paint
- Kit contains all the consumables needed to restore a Micro Dual Action Sander Tool Kit back to new
- Kit includes one 3" *Velcro* Pad 5/16" x 24T, (25) 3" 180 Grit pads, (25) 3" 220 Grit pads, ten 3" 320 Grit pads and ten 3" 800 Grit pads

AT403ACCKIT

AT403ACCKIT Micro Polisher Accessory Kit
- All the pads needed to go from buffing to final polish
- Kit contains all the consumables needed to restore a Micro Polisher Tool Kit back to new
- Kit includes one 3" *Velcro* Pad 5/16" x 24T, one 3" Wool Pad and one Foam Waffle Pad

AC3D

AC16D

AC6B

AC240B

AC241B

AC208A

AC204C

AC339A

Style/Application	Stock No.	Brush Diameter, inches	Shank Size Arbor Size, inches	Wire Diameter, inches	Maximum Rated RPM
Crimped for removing carbon from cylinder heads and valve parts	AC2D	1	1/4	.020	20,000
	AC3D	3/4	1/4	.020	20,000
Solid end for cleaning aluminum cylinder heads and transmission parts	AC16D	3/4	1/4	.006	20,000
Spiral twist for removing heavy deposits	AC6B	3/4	1/4	.014	20,000
	AC7E	1	1/4	.020	20,000
Cup type for cleaning wheel rims and scuffing tires	AC240B	1 1/2	1/4	.012	6,000
Hollow end crimped cup for light duty cleaning	AC241B	2 1/2	1/4	.012	6,000
Cup flared for deburring, cleaning hard-to-reach areas and wheel rims, and scuffing tires	AC208A	1 1/2	1/4	.008	20,000
	AC212A	1 1/2	1/4	.012	20,000
	AC214A	2 1/2	1/4	.014	18,000
	AC224A	3	1/4	.014	15,000
Encapsulated wire end brushes for a consistent stiff brushing action	AC204C	1/2	1/4	.014	8,000
	AC205C	3/4	1/4	.014	8,000
	AC206C	1	1/4	.014	8,000
Knot type, single row wire cup for heavy duty surface applications	AC339A	3	5/8-11	.020	12,500
	AC341B	3	5/8-11	.012	7,000
	AC342B	4	5/8-11	.020	7,000

AC420A

AC616

AC17D

AC243

AC10306

A24C

AC4Z60T27MP

AC3180FWMP

AC13002

	Stock No.	Brush Diameter, inches	Shank Size Arbor Size, inches	Wire Diameter, inches	Maximum Rated RPM
Knotted Wire Wheel for heavy duty cleaning	AC420A	4	5/8-11	.020	20,000
	AC421A	4	M10 x 1.25	.020	20,000
Crimped Wire Wheel general purpose cleaner	AC616	3	1/4	.0118	20,000
Wire Brush medium duty general cleaner	AC17D	1	1/4	.006	20,000
	AC243	3	5/8-11	.014	14,000
End Brush ideal for cleaning right angle	AC10302	1/2	1/4	.014	25,000
	AC10306	3/4	1/4	.014	22,000

A24C Arbor Adaptor

- Adapts electric drill to light duty grinding and wire brushing: use with wheels and brushes up to 4" in diameter
- Shank is 1/4": arbor is 1/2" in diameter; Length is 1 3/4"
- Maximum rated RPM: 20,000

	Stock No.	Diameter, inches	Type	Grit	Quantity to Pack
Flap Discs	AC2Z40T27MP	2	27	40	10
	AC2Z60T27MP	2	27	60	10
	AC2Z80T27MP	2	27	80	10
	AC3Z40T27MP	3	27	40	10
	AC3Z60T27MP	3	27	60	10
	AC3Z80T27MP	3	27	80	10
	AC4Z60T27MP	4	27	60	10
Flap Wheels	AC3160FWMP	3	—	60	10
	AC3180FWMP	3	—	80	10
	AC31120FWMP	3	—	120	10

AC13002 Drill Accessory Kit

- Includes AC616 crimped wire wheel, AC240B crimped wire cup brush, AC3D crimped wire end brush and AC3180FWMP abrasive flap wheel

ACMANDREL Mandrel

- 1/4" stem for use on 2" and 3" flap discs

⚠WARNING

- Do not use power tool accessories above their maximum rated RPM
- Read safety precautions on pages W1 to W4

CUTTING AND GRINDING ACCESSORIES Blue-Point®

AT415CWMP

AT415CWMP Cut Off Wheel
- Use for metal notching and bolt cutting
- Use on 4 1/2" grinders with 5/8 x 11" thread arbor
- Maximum rated RPM: 13,300
- Front and back illustrated
- Package of five discs

AT415T27MP

AT415T27MP Grinding Wheel
- Use for rough grinding applications
- Use on 4 1/2" grinders with 5/8 x 11" thread arbor
- Maximum rated RPM: 13,300
- Package of five discs

ETA125A

ETA125A Grinding Wheel Set
- Use with ET1350/ET1360
- Maximum rated RPM: 12,000
- Package of five discs

AT415-20B

AT415-20B Grinding Disc
- For AT415B grinder
- 4" diameter x 3/16" thick with 5/8" arbor hole
- Maximum rated RPM: 12,000
- Package of five discs

AT415A51

AT415A51 Grinding Discs
- For AT415B grinder
- 4 1/2" diameter x 3/16" thick with 7/8" arbor hole
- Maximum rated RPM: 12,000
- Package of five discs

ETA250A

ETA250A Grinding Wheel Set
- 1/4" x 4 1/2" x 7/8"
- Grit coarse (24)
- Maximum rated RPM: 12,000

AT116-3 ROLOC® Pad
- 2" *ROLOC* Pad with 1/4" shaft
- Optional accessory for the AT116 Die Grinder

AT116-4 *ROLOC* Pad
- 3" *ROLOC* Pad with 1/4" shaft
- Optional accessory for the AT116 Die Grinder

AT150C28A

AT150C28A Cutter Wheels
- 3" diameter x 1/32" thick with 3/8" arbor hole
- 54 grit
- Maximum rated RPM: 25,000
- Package of six discs

AT150C29A Cutter Wheels
- 3" diameter x 3/32" thick with 3/8" arbor hole
- 54 Grit
- Maximum rated RPM: 25,000

AC13001

AC13001 Mini Grinder Kit
- Includes AC4Z60T27MP flap disc max RPM 13,000, AC339A knot cup brush max RPM 14,000 and AC402A knot wire wheel, max RPM 20,000

AC13003

AC13003 Cut/Grind/Finish Kit
- Includes AC4Z60T27MP flap disc max RPM 13,000, AC339A knot cup brush max RPM 14,000, AT415T27MP grinding wheel max RPM 13,300 and two AT415CWMP cut off wheels max RPM 13,500

Grinding burrs are ideal for use with Snap-on® die grinders described on p.476–477. 1/4" and 1/8" shank burrs are available, all with solid carbide heads. The 1/8" shank units all have a maximum head diameter of 1/8".

1/4" Shank, Burrs

Style/Application	Stock No.	Style	Shank Length, in.	Flute Length, in.	Head Dia., in.	Recommended RPM Cast Iron	Recommended RPM Stainless	Set Contains: VWB800D	VWBL400	VWB200C
1/4" Shank, Burrs Generally used for ferrous metals	**VWB1C**	A	—	5/8	1/4	22,000	23,000	•		
	VWB9B	A	—	1	1/2	16,000	24,000			
	VWB2B	B	—	3/4	3/8	18,000	27,000	•		
	VWB10B	B	—	1	1/2	16,000	24,000			
	VWB3B	C	—	1/4	5/16	20,000	30,000	•		
	VWB4B	D	—	7/8	1/2	16,000	24,000	•		
	VWB11B	E	—	3/4	3/8	18,000	27,000			
	VWB5B	E	—	1	1/2	16,000	24,000	•		
	VWB6B	F	—	3/4	3/8	18,000	27,000	•		
	VWB7B	G	—	1 1/8	1/2	16,000	24,000	•		
	VWB12B	G	—	1 1/16	3/8	18,000	27,000			
	VWB8B	H	—	7/8	1/2	16,000	24,000	•		
1/4" Shank, Long Reach Burrs Use for surface conditioning of non-ferrous materials like magnesium, soft steel and hard plastic plus porting of aluminum engine parts	**VWBL401**	—	4	—	3/8	14,000	17,000		•	
	VWBL402	—	4	—	3/8	14,000	17,000		•	
	VWBL403	—	4	—	3/8	14,000	17,000		•	
	VWBL404	—	4	—	3/8	14,000	17,000		•	
1/4" Shank, Wide Fluted Burrs For non-ferrous metals, plastics, and softer material	**VWB206C**	A	—	1	1/2	15,000	25,000			•
	VWB204C	A	—	3/4	1/4	15,000	25,000			•
	VWB203C	B	—	1	1/2	15,000	25,000			•
	VWB202C	E	—	1	1/2	15,000	25,000			•
	VWB201C	G	—	1 1/8	1/2	15,000	25,000			•
	VWB205C	G	—	1 1/16	3/8	15,000	25,000			•

VWB800D

VWBL400

VWB200C

1/8" Shank, Burrs

Stock No.	Style	Flute Length, in.	Recommended RPM Cast Iron	Recommended RPM Stainless	Set Contains: VWB700B
VWB301B	A	9/16	20,000	75,000	•
VWB302B	B	9/16	20,000	75,000	•
VWB303B	C	1/8	20,000	75,000	•
VWB304B	D	7/32	20,000	75,000	•
VWB305B	E	1/2	20,000	75,000	•
VWB306B	F	3/8	20,000	75,000	•
VWB307B	G	1/2	20,000	75,000	•
VWB308B	H	7/16	20,000	75,000	•

VWB700B

1/4" Shank, Mounted Points

Stock No.	Size, inches	Maximum RPM	Set Contains: VWB500
VWB501	11/16 x 1 1/4	28,000	•
VWB502	3/4 x 3/4	28,000	•
VWB503	3/4 x 1 1/8	28,000	
VWB504	1/4 x 1 3/4	28,000	•
VWB505	3/4 x 1 1/4	28,000	•
VWB506	3/8 x 1	28,000	•
VWB507	1/4 x 1 1/4	28,000	
VWB508	11/16 x 7/8	28,000	

VWB501

VWB502

VWB503

VWB504

VWB505

VWB506

VWB507

VWB508

⚠WARNING

- Do not use power tool accessories above their maximum rated RPM
- Read safety precautions on pages W1 to W4

AIR HAMMER ACCESSORIES

PHG63A

PHG64A

PHG76A

PHG21

PH75A

PHG85A

PHG57A

PHG73A

PHG58B

PHG111

PHG95A

PHG65A

PHG87A

PH201

PHG74A

Air Hammer Bits

Stock No.	Description	Application	Length, inches	Tip, inches	Set Contains: PHG1005AK	PHG1055K	PHG1066K
PHG94A	Ball Joint/Tie Rod Separator	For separating ball joints and tie rods	7 13/16	5/8 opening			
PHG63A	Ball Joint/Tie Rod Separator	For separating ball joints and tie rods	7 3/8	13/16 opening			
PHG69A	Ball Joint/Tie Rod Separator	For separating ball joints and tie rods	7 3/8	1 opening			
PHG93A	Ball Joint/Tie Rod Separator	For separating ball joints and tie rods	8 3/4	1 1/4 opening			
PHG64A	Bent End Chisel	Shears ball joint rivets	10 1/2	5/8			
PHG76A	Bushing Cutter	For bushing cutting	6 1/4	1/2			
PHG21	Offset Bushing Splitter	For bushing cutting, when extra reach is needed	8 3/8	5/8			
PH75A	Bushing Driver	For pneumatic bushing driving	5 1/2	1/2			
PHG85A	Curved Flat Chisel	For rivet cutting work	5 3/4	5/8			
PHG57A	Double Bladed Panel Cutter	For panels cutting and sheet metal cutting	6	3/4	•	•	
PHG73A	Drift Punch	For punching out pins and other driving applications	6 1/2	1/2		•	•
PHG77	Straight Punch	For punching out pins and other driving applications that need extra reach	18	1/2			
PHG55A	Flat Chisel	For normal chisel cutting applications	6 1/2	3/4	•	•	•
PHG58B	Flat Chisel	For normal chisel cutting applications, when extra reach is needed	10	3/4			•
PHG84A	Flat Chisel	For hammering application, when extra reach is needed	18	3/4			
PHG99	Flat Chisel	For normal chisel cutting applications, when a wide blade is needed	6 1/2	1 1/2			
PHG111	Hinge Pin Driver	Remove and install tube-hinge pins on car and truck doors	7 3/8	0.237			
PHG112	Hinge Pin Driver	Remove and install tube-hinge pins on car and truck doors	7 3/8	0.302			
PHG95A	Hole Punch	Punches 3/16" diameter starting hole in sheet metal to prepare it for use with CJ107 and CJ114 Body Dent Pullers	5 5/8	—			
PHG65A	Outside Cutter	For cutting the muffler flange	8 5/8	7/8			
PHG66A	Inside Cutter	For cutting the exhaust pipe inside the flange	8 3/4	3/16			
PHG87A	Muffler Cutter	For removing the tail pipe	8 3/4	7/8			
PH201	Needle Scaler	Projecting rods chip away rust and scale. Use only at low pressure	7 13/16	—			
PHG74A	Riveter	For 3/16" stem	5 13/16	1/2			

PHG71A

PHG56A

PHG51A

PHG1005AK

PHG61A

PH1038

PHG70A

PHG1055K

PHG59A

PHG72A

PHG83A

PHG151A

PHG161A

PHG155A

PH200D

Stock No.	Description	Application	Length, inches	Tip, inches	Set Contains: PHG1005AK	PHG1055K	PHG1066K
PHG78A	Riveter	For 1/4" stem	5 13/16	1/2			
PHG88A	Riveter	For forming heads on 3/16" compression rivets	5 13/16	1/2			
PHG89A	Riveter	For forming heads on 1/4" compression rivets	3 7/8	7/8			
PHG71A	Round Hammer	For hammering applications	4 1/4	1			•
PHG68	Round Hammer	For hammering application, when extra reach is needed	7	1		•	•
PHG56A	Scraper	For scraping applications	6 3/16	1 5/16			
PHG51A	Sheet Metal Ripper	For sheet metal ripping and cutting	5 3/8	5/8	•		
PHG61A	Slitting Chisel	For cutting tail pipes and other surfaces	6 7/8	1	•		
PH1038	Air Hammer Socket Adaptor	Attaches to air hammer to provide vibration while turning stubborn fasteners, 3/4" hex, 3/8" square drive	5	—			
PHG70A	Spot Weld Breaker	For weld removal	6 1/4	3/4	•		
PHG59A	Tapered Punch	For removal of pins	6 1/2	3/16		•	•
PHG72A	U-Joint Trunion Driver	For needle type trunions	3 7/8	7/8			
PHG83A	Valve Guide Remover	For removing and installing valve guides	190 mm	7.7 mm pilot			
PHG86A	Valve Guide Remover	For removing and installing valve guides	190 mm	9.3 mm pilot			
PHG91A	Valve Guide Remover	For removing and installing valve guides	189 mm	6.5 mm pilot			
PHG96A	Valve Guide Remover	For removing and installing valve guides	189 mm	6.9 mm pilot			
PHG97A	Valve Guide Remover	For removing and installing valve guides	189 mm	5.2 mm pilot			
PHG151A	Panel Cutter	Edges and trims sheet metal. Cutting end is offset 25°. Non-turn shank	6 7/8	5/8			
PHG161A	Slitting Chisel	Cuts exhaust system pipes, 1/8" tip thickness. Non-turn shank	8 3/4	1			
PHG155A	Cold Chisel	Cuts bolts, nuts, tees and angles. Also splits and bevels. Non-turn shank	7	21/32			
PH200D	Universal Quick Change Chuck Retainer	Use for fast, easy insertion/removal of air hammer bits	—	—			
C0508	Kit Bag				•	•	

⚠WARNING

• Use air hammer accessories only for their intended applications, replace when worn or broken
• Read safety precautions on pages W1 to W4

AIR HAMMER ACCESSORIES

PHG1004RP

Rolling Pin Punches

Set Contains: PHG1004RP

Stock No.	Description	Application	Length, inches	Tip, inches	
PHG79A	Roll Pin Punch	For removing and installing roll pins	7 1/2	3/8	•
PHG80A	Roll Pin Punch	For removing and installing roll pins	7 1/2	1/4	•
PHG81A	Roll Pin Punch	For removing and installing roll pins	7 1/2	5/16	•
PHG821	Roll Pin Punch	For removing and installing roll pins	7 1/2	1/2	•

PHGL37KT

Extra Long Drift Punches

Set Contains: PHGL37KT

Stock No.	Description	Application	Length, inches	Tip, inches	
PHGL78	Extra Long Punch Drift	Loosens hard to reach rusty bolts and fasteners	5	5/16	•
PHGL710	Extra Long Punch Drift	Loosens hard to reach rusty bolts and fasteners	5	3/8	•
PHGL712	Extra Long Punch Drift	Loosens hard to reach rusty bolts and fasteners	5	1/2	•

PHGL37KT Extra Long Punch Drift Set
- Includes PHGL78, PHGL710 and PHGL712 Extra Long Drift Punches (3pc) in PHGL37-KB Storage Pouch

IMPACT WRENCH AND RATCHET ACCESSORIES

MRB25

YA4190A

YA4190CAPA

YA4190FAR

YA4190DIS

MRB25 Magnetic Impact Wrench Holder
- Attach to lift post, tool storage unit or cart to keep impact gun handy
- Ideal for tire and wheel shops
- 160 lb of magnetic force
- Outer diameter of base is 3 7/8"
- Inner diameter of holder is 2 7/8"

YA4190A Mini Grease Gun
- Fits all flush type fittings
- Good for FAR72B/FAR70 series air ratchets
- Spring return plunger
- 3 oz capacity

YA4190CAPA Grease Gun Head

YA4190FAR Grease Gun Assembly

YA4190DIS Grease Dispenser
- Grease dispenser attachment for YA4190A
- Contains 3 oz of Mobil® temp SHC-32 grease for Snap-on® FAR series air ratchets

AIR AND RECIPROCATING SAW BLADES

ASB4-42

Air Saw Blades

Stock No.	Application/Material Thickness	Teeth per Inch	Blade Length, inches	Qty Each
ASB4-42	Over 0.20"	18	3 5/8	10 each
ASB4-43	0.08"–0.20"	24	3 5/8	10 each
ASB4-44	0.00"–0.08"	32	3 5/8	10 each

Metal Cutting Blades

Bi-metal reciprocating saw blades with precision ground teeth for maximum cutting power, greater control and higher speed.

Stock No.	Application/Material Thickness	Teeth per inch	Blade Thickness, inches	Blade Length, inches	Qty Each
CTRS614MC	Metal 1/8"–3/8" thick	14	.035	6	5 each
CTRS914MC	Metal 1/8"–3/8" thick	14	.035	9	5 each
CTRS618MC	Metal 1/8"–1/4" thick	18	.035	6	5 each
CTRS918MC	Metal 1/8"–1/4" thick	18	.035	9	5 each
CTRS624MC	Metal less than 1/8" thick	24	.035	6	5 each

CTRS614MC

General Purpose Blades

Versatile bi-metal blades for general purpose cutting of metal, plastic laminates and wood with nails.

Stock No.	Application/Material Thickness	Teeth per inch	Blade Thickness, inches	Blade Length, inches	Qty Each
CTRS658GP	Metal/Plastic/Wood	5–8 variable	.050	6	5 each
CTRS96GP	Metal/Plastic/Wood	6	.050	9	5 each
CTRS126GP	Metal/Plastic/Wood	6	.050	12	5 each

CTRS126GP

Demolition Blades

Extra heavy duty bi-metal blades with thicker body and variable 5/8 tooth pitch are ideal for heavy demolition work in wood with nails and also strong enough to handle thick metals.

Stock No.	Application/Material Thickness	Teeth per inch	Blade Thickness, inches	Blade Length, inches	Qty Each
CTRS658DB	Nail Embedded Wood	5–8 variable	.062	6	5 each
CTRS958DB	Nail Embedded Wood	5–8 variable	.062	9	5 each

CTRS658DB

Wood Cutting Blades

Bi-metal blades with precision ground teeth for fast cutting of wood 3/8" and thicker.

Stock No.	Application/Material Thickness	Teeth per inch	Blade Thickness, inches	Blade Length, inches	Qty Each
CTRS67WB	Fast cutting wood 3/8" and thicker	7	.040	6	5 each
CTRS97WB	Fast cutting wood 3/8" and thicker	7	.040	9	5 each

CTRS67WB

Air Saw Blades (Blue-Point®)

Bi-Metal Blades	AT192A	AT194A
Bi-Metal Blade Scroll, 18 TPI, 3 3/4" long (qty 5)	AT190-39C	AT190-39C
Bi-Metal Blade Scroll, 24 TPI, 3 3/4" long (qty 5)	AT190-40C	AT190-40C
Bi-Metal Blade Scroll, 32 TPI, 3 3/4" long (qty 5)	AT190-41C	AT190-41C
Bi-Metal Blade Multipurpose, 18 TPI, 4" (qty 5)	AT190-42B	–
Bi-Metal Blade Multipurpose, 24 TPI, 4" (qty 5)	AT190-43B	–
Bi-Metal Blade Multipurpose, 32 TPI, 4" (qty 5)	AT190-44B	–

AT190-42B

WARNING

- Use air hammer accessories only for their intended applications, replace when worn or broken
- Read safety precautions on pages W1 to W4

BLOW GUNS

JT13B

JT17A

YA1050B

YA4010

JT14

JT23

JT24

YA105020

AT4101

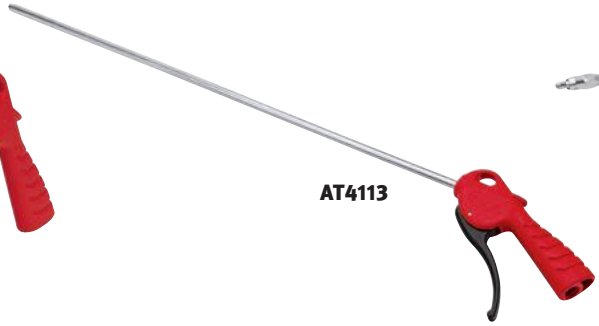
AT4113

AT4135

AT4124

Non-vented Blow Guns

Do not use non-vented blow guns above 30 PSI air supply pressure.

JT13B Blow Gun (Blue-Point®)
- Tapered, rubber tip for a leak-proof connection between gun and fluid line
- Vinyl coated control lever
- Hanging hook for storage
- 4 1/2" long

JT17A Blow Gun (*Blue-Point*)
Same as JT13B except with a 3" tip extension in place of the rubber tip.

YA1050B Blow Gun (*Blue-Point*)
Pistol grip style with front full-size trigger. Infinitely variable flow. 10 1/4" long.

YA4010 Quick Change Tip
Conical rubber tip for YA1050B.

JT14 Blow Gun (*Blue-Point*)
Industrial Interchange style coupler.

JT15 Blow Gun
Universal 1/4" pipe threading.

JT20 Blow Gun
ARO® style coupler.

JT21 Blow Gun
Tru-Flate® style male coupler.

JT22 Blow Gun
Lincoln® style male coupler.

JT23 Blow Gun (*Blue-Point*)
Solid brass. Industrial Interchange style coupler.

JT24 Blow Gun (*Blue-Point*)
Solid brass. *ARO* style coupler.

YA105020 Blow Gun (*Blue-Point*)
- 20" bent nozzle
- Trigger provides variable air flow control
- Lightweight body with ergonomically designed grip provides comfort and control
- Venturi tip directs air sideways if tip end is obstructed
- Reinforced 1/4"-18 NPT inlet

YA105013 Blow Gun
Same as YA105020 except 13" bent nozzle.

YA1050T1 Removable Star Tip
Removable star tip for YA105020 blow gun.

YA1050T2 Venturi Air Booster
Venturi nozzle draws in ambient air for extra high flow increasing by 100%. Suitable for deflecting lightweight wood chips. Diverts air when dead ended, reducing the outlet pressure to less than 2 bar (29 PSI).

YA1050T3 Rubber Tip Kit
Rubber tip set for YA105020 blow gun.

YA1050T4 Chip/Fluid Shield
Chip/fluid shield for YA105020 blow gun.

AT4101 Blow Gun (4")
- Built-in valve system improves trigger control
- Impact resistant material for long lasting service
- Galvanized blow tube for corrosion resistance
- Lifetime warranty (accessories not included)

AT4113 Blow Gun (19")
- Built-in valve system improves trigger control
- Impact resistant material for long lasting service
- Galvanized blow tube for corrosion resistance
- Lifetime warranty (accessories not included)

AT4135 Blow Gun with Air Adjustment
- Built-in valve system improves trigger control
- Impact resistant material for long lasting service
- Galvanized blow tube for corrosion resistance
- Lifetime warranty (accessories not included)
- Sound level 78 dB (8 bar)
- Regulate flow with adjustable volume control
- Complies with OSHA safety standards

AT4124 Rubber Tip
Prevents scratching of surface for AT4101, AT4113 and AT4135 blow guns.

Vented Blow Guns

Do not obstruct vents. Do not use vented blow guns above 135 PSI maximum air supply pressure.

JT19A Venturi Tip Blow Gun

- Directs air sideways if tip end becomes obstructed and increases airflow
- Includes stabilizer valve for variable pressure
- 1" hanging hook and paddle type air control lever
- Air inlet: 1/4"-18 NPT(f)

JT19A

YA1055B Blow Gun

- Variable flow trigger offers precise air flow control
- Six-outlet “star tip” delivers an even distribution of air
- 4" full flow tube
- Complies with OSHA safety standards
- Air inlet: 1/4"-18 NPT(f)

YA1055B

Rubber Air Hoses

Ideal for industrial applications. Male threads at both ends.

Stock No.	Hose I.D., inches	Hose Length, feet	Thread Size	Maximum Pressure, PSI
IM2001A	1/4	5	1/4"-18 NPT	300
IM2002A	3/8	5	3/8"-18 NPT	300
IM2004A	3/8	2	1/4"-18 NPT	300
IM2005A	3/8	25	1/4"-18 NPT	325
IM2008A	3/8	50	1/4"-18 NPT	325
IM2009A	1/2	50	3/8"-18 NPT	325

IM2005A

Reinforced Polyurethane Air Hoses

- Extremely lightweight for easy maneuverability
- Reinforced construction eliminates layer separation resulting from expansion and contraction during pulsating operations
- More abrasion resistant than PVC and rubber hoses
- Easy to wrap and store, even in subzero weather
- UV stabilized for longer outdoor life
- Strain relief features a tight bending radius to virtually eliminate hose kinking
- Reusable fittings and strain reliefs for longer life

Stock No.	Color	Hose I.D., inches	Hose Length, feet	Thread Size	Temp. Range	Working Pressure
AIRHOSE35	Red	3/8	35	1/4" NPT	-40 °F–165 °F (-40 °C–73.9 °C)	
AIRHOSE50	Red	3/8	50	1/4" NPT	-40 °F–165 °F (-40 °C–73.9 °C)	200 PSI @ 70 °F (21 °C)

AIRHOSE35

Air Swivel Connectors (Blue-Point®)

- Swivels turn 360° at two points for complete tool maneuverability
- Air hoses hang straight to the floor

Stock No.	Thread Size	Maximum Pressure, PSI	Airflow
YA502M	1/4" NPT	150	Up to 4.6 CFM (33 SCFM)
YA503M	3/8"-18 NPT	150	Up to 6.3 CFM (45 SCFM) [178 LPM]
ASC14	1/4" NPT	150	Up to 35 SCFM (991 LPM)
ASC14U	1/4" NPT	150	Up to 35SCFM (991 LPM)

YA502M

⚠WARNING

- Do not direct blow gun at yourself or others
- Read safety precautions on pages W1 to W4

AIR LINE COUPLERS AND ADAPTORS

AHC23PMD

AHC26D

AHC25MD

AHC23MD

AHC21MD

AHC22MD

AHC28MD

AHC31

AHC27MC

AHC22FD

AHC25FD

IM10D

AHC300

Air Line Couplers and Adaptors

Body Size, inches	Style	Thread Size	Quick Coupler Male	Quick Coupler Female	Adaptor Male	Adaptor Female
1/4	Lincoln®	1/4"-18 NPT	–	AHC26D	AHC26MD	AHC26FD
1/4	Tru-Flate®	1/4"-18 NPT	–	AHC24D	AHC24MD	AHC24FD
3/8	*Tru-Flate*	3/8"-18 NPT	–	AHC25D	AHC25MD	AHC25FD
1/4	ARO®	1/4"-18 NPT	AHC23PMD	AHC23D	AHC23MD	AHC23FD
1/4	Industrial Interchange	1/4"-18 NPT	AHC21PMD	AHC21D	AHC21MD	AHC21FD
3/8	Industrial Interchange	1/4"-18 NPT	–	AHC22E	AHC22MD	AHC22FD
3/8	Industrial Interchange	3/8"-18 NPT	–	AHC28D	AHC28MD	AHC28FD
1/2	Industrial Interchange	3/8"-18 NPT	–	–	AHC31	–
1/2	Industrial Interchange	1/2"-14 NPT	–	AHC27D	AHC27MD	AHC27FD
1/4	Rigid Mounting*	1/4"-18 NPT	–	AHC21PD	–	–
1/4	Hi-Flow	1/4"-18 NPT	–	AHCC98C	AHCCP97C	–
1/4	Hi-Flow HVLP	1/4"-18 NPT	AHCC91C	AHCC90C	–	AHCCP90C

*Conforms to Mil Spec MIL-C-4109F

All adaptors are plated steel to improve durability

Air Valves and Manifolds

IM10D Air Valve
- Volume of airflow can be regulated with 1/4 turn of control knob
- Male/female threads

AHC300 Multiline Air Manifold
- Capacity of three air lines running at the same time
- Allows three workstations to use the same air supply
- Evenly distributes air through three different lines

GENERAL ACCESSORIES

IM1PTMP6

IM1OZMP12

CL6

Lubrication Accessories

IM1PTMP6 Air Motor Oil
- Cleans all piston and rotary air motors and helps prevent rust formation
- Six pack of IM1PT 16 oz bottles

IM1OZMP12 Air Motor Oil
- 12 pack of 1 oz bottles

CL6 Cutting Oil
- Superior antiweld and lubricating properties reduce heat buildup in drill bits, grinding burrs and other metal cutting tools
- 1 pt bottle

AT187

CTTOTEA

BPTOTE

CTUTOTE

CTTOTEA Power Tool Tote Bag
- Wide opening for easy access to tools, extra padding for protection
- Durable 600 Denier® outside for strength
- Interior pockets and compartments for tool organization
- Padded handles for comfortable transport
- Reinforced bottom for strength
- Six external pockets for extra storage
- Approximate inside dimensions, open: 18" L x 8" W x 11 1/2" D

BPTOTE Tote Bag (Blue-Point®)
- Heavy duty 600 x 300 D polyester
- Water resistant, rugged and versatile
- Wide top opening for easy access
- Multiple interior and external pockets for organization
- Overall dimensions: 16 1/2" L x 10 1/2" W x 12 1/4" H

CTUTOTE Power Tool Mini Tote Bag
- Wide opening for easy access to your tools
- Durable 600 Denier nylon outside for strength
- Pockets and compartments for tool organization
- Padded handles for comfortable transport
- Reinforced bottom for strength
- Heavy duty industrial zipper
- 12" L x 10" D x 10" W

Stock No.	Recommended Air Pressure, PSI	Air Consumption, average, cfm (scfm)	Free Speed, RPM	Sound Level, dBa	Air Inlet Thread Size	Recommended Hose Size, inches	Hose Length, inches	Overall Length, inches	Weight, lb
AT187*	90	1.0 (7)	14,000	90	1/4"-18 NPT	3/8	59 1/2	5 1/2 without hose	.48

*CE

AT187 Engraving Pen (*Blue-Point*)
- Mark tools and other objects to prevent theft
- Use on hardened steel plate (up to HRC55), metals, glass, stone, ceramic, plastics and more
- Used for deburring operations plus reshaping screw or bolt heads for removal
- Rugged metal housing
- Knurled fingertip control
- Tips sold separately

AT187-11 45° Thick Plate Carbide Tip
For AT187.

AT187-13 15° Thin Plate Carbide Tip
For AT187.

AT187-14 30° Medium Plate Carbide Tip
For AT187.

SHOP & TECH TOOLS

Overview.....508
Testing & Electronics.....510
Welding.....552
Undercar.....568
Battery Service.....606
Air Conditioning.....616
Cooling.....629
Shop Equipment.....637
Shop Cleaning.....721
Safety.....728

TOP-OF-THE-LINE EQUIPMENT. TO IMPROVE YOUR BOTTOM LINE.

Whether you own a shop or work as a tech, our productivity solutions save you time while helping increase revenues. For tools and technology that's both hardworking and business savvy, turn to Snap-on. It's equipment you can bank on.

"I specialize in engine swaps. KoolKare™ allows me to recover and recharge quickly for engine removal and replacement."

Zeb Beard
Warren, AR

EQUIP YOUR SHOP.

When you tap Snap-on to expand your shop's capabilities and productivity, you're turning to the best in the business. And, we'll help you keep your business.

RETURN ON INVESTMENT — From welders made to withstand tough shop environments to battery chargers that perform a variety of functions, our tools build one thing first: your business.

INNOVATION — Keep customers loyal to your shop by servicing their vehicles with the most advanced equipment available.

BREADTH — Choose from 22 shop equipment categories that help you expand your services, enhance your capabilities and attract more business.

TECH ESSENTIALS

Some tools are acquired on a "need-to-grow" basis: maximize your potential and enhance your productivity with the essentials.

WORK SMARTER — Get complete system coverage: from multimeters, to video inspection scopes, to noise detection devices and more.

WORK FASTER — Time is money. And, when you cut prep time and labor time, that provides you with the opportunity to earn more.

WORK SAFER — Protect yourself and your profitability – and, just as importantly, stay on the job – with proper safety equipment from Snap-on.

Zeb has:
KoolKare PLUS A/C
Service center - EEAC325B

ZERO IN ON SOLUTIONS.

Enhance your senses with Snap-on® meters and analyzers. *Snap-on* videoscopes, listening devices, multimeters and other testers/electronics deliver with pinpoint accuracy. Get an up-close look at a problem, detect the slightest engine noises, and diagnose complex electrical issues.

MEASURE AND DETECT.

Problems come in many forms – and Snap-on helps solve them. Use our testing and electronic equipment to reduce the time and effort it takes to find the source. Whether it's related to amps, volts, HC, CO2, CO, O2, NOx, degrees, ground, shorts, watts, rpm, decibels, compression, cylinder leakage, vacuum or more.

DIGITAL MULTIMETERS

Select the Meter For Your Needs
7-Year Limited Warranty on Snap-on® meters

EEDM596DK

EEDM525E

EEDM504D

EEDM503D

EEDM575D

Digital Multimeters

Stock No.	CHECK YOUR NEEDS ✔	EEDM596DK†	EEDM525E†	EEDM504D†	EEDM503D†	EEDM575D†
Certificate of Calibration Model		EEDM504DCRT†	EEDM525ECRT†	EEDM504DCRT†	—	—
Display Count		40,000	4,000	4,000	2,000	11,000
AC Volts		750	750	750	750	600
DC Volts		1,000	1,000	1,000	1,000	600
Basic DC Accuracy		0.10%	0.50%	0.50%	0.50%	0.5%
AC Amps		10	10	10	10	400
Micro Amps		—	Yes	Yes	Yes	400 DC
DC Amps		10	10	10	10	400
True RMS (Root Mean Square)		Yes	Yes	—	—	Yes
Resistance, ohms		40M Ohm	40M Ohm	40M Ohm	20M Ohm	110 Mega Ohms
Capacitance		Yes	Yes	Yes	—	110mF
Frequency		Yes	Yes	Yes	—	10 KHz
Insulation Test		No	No	No	No	—
Analog Bar Graph		Yes	Yes	Yes	—	—
Auto Range		Yes	Yes	Yes	—	Yes
Data Hold		Yes	Yes	Yes	Yes	Yes
Min/Max		Yes	Yes	Yes	—	Yes
Backlight		Yes	Yes	—	—	—
Color Screen		—	Yes	—	—	—
Auto Shut-Off		Yes	Yes	Yes	—	Yes
RPM		Yes	**EEDMRPMG** (opt.)	**EEDMRPMG** (opt.)	**EEDMRPMG** (opt.)	—
Adjustable Trigger Level		Yes		—	—	—
Noise Reduction Circuit		Yes	—	—	—	—
Temperature		**MT586B1** (incl.)	**MT586B1** (opt.)	**EEDM506C†** (opt.)	**EEDM506C†** (opt.)	**MT586-4** (opt.)
Duty/Dwell		Yes	Duty Only	Duty Only	—	—
mS Pulse Width		Yes	—	—	—	—
Comp. Output (USB)		Yes, Included	—	—	—	—
UL® Listed		cULus 61010-1	cULus 61010-1	cULus 61010-1	cULus 61010-1	cULus 61010-1
CAT Rating		CATII 750V AC, CATII 1,000V DC, CATIII 600V AC/DC	CATII 750V AC, CATII 1,000V DC, CATIII 600V AC/DC	CATII 750V AC, CATII 1,000V DC, CATIII 600V AC/DC	CATII 750V AC, CATII 1,000V DC, CATIII 600V AC/DC	CATIII 600V
Easy Open Battery and Fuse Door		Yes	Yes	Yes	Yes	Yes
Glitch Capture		Yes	—	—	—	—
Blown Fuse Identifier		Yes	Yes	Yes	Yes	—
Dimensions, inches		7 3/4 x 3 3/4 x 1 1/2	7 3/4 x 3 3/4 x 1 1/2	7 3/4 x 3 3/4 x 1 1/2	7 3/4 x 3 3/4 x 1 1/2	10 x 1 3/8 x 2 1/2
Case or Zipper Pouch		MT586BK1	EEDM503B3	EEDM504B4	EEDM503B3	Pouch
Replacement Fuses		EEDM504B1 EEDM504B2	EEDM525D6 EEDM525D7	EEDM504B1 EEDM504B2	EEDM503B2 EEDM504B2	EEDM504B1

*Certified and *UL* listed
†CE

TECHNICAL SUPPORT 1-888-382-6522

⚠WARNING

- Do not use in environment with explosive vapor
- Read safety precautions on pages W1 to W4

DIGITAL MULTIMETERS

7-Year Limited Warranty on Snap-on® meters
5-Year Limited Warranty on Blue-Point® meters

EEDM604C

EEDM650C

MT454C

MT501C

MT574C

Digital Multimeters

Specifications	CHECK YOUR NEEDS ✓	EEDM604C†	EEDM650C	MT454C**†	MT501C**†	MT574C**†
Certificate of Calibration Model		EEDM604CCRT	**EEDM650CCRT**	—	—	**MT574CCRT**
Display Count		50,000	4,000	4,000	2,000	4,000
AC Volts		1,000	1,000	600	600	600
DC Volts		1,000	1,000	600	600	600
Basic DC Accuracy		0.05%	±0.1% + 2 digits	0.50%	0.75%	0.30%
AC Amps		10	400mA	—	—	400mA
Micro Amps		Yes	Yes	—	—	—
DC Amps		10	400mA	—	—	400mA
True RMS (Root Mean Square)		Yes	Yes	—	—	—
Resistance, ohms		(plus conductance)	40M Ohm	40M Ohm	2K Ohm	40M Ohm
Capacitance		Yes	Yes	—	—	—
Frequency		Yes	Yes	—	—	—
Insulation Test		No	Yes	No	No	No
Analog Bar Graph		Yes	—	—	—	—
Auto Range		Yes	Yes	Yes	—	Yes
Data Hold		Yes	Yes	—	Yes	Yes
Min/Max		Yes	Yes	—	—	Yes
Backlight		Yes	Yes	—	—	—
Auto Shut-Off		Yes	Yes	Yes	—	Yes
RPM		**EEDMRPMG** (opt.)	**EEDMRPMG** (opt.)	—	**EEDMRPMG** (opt.)	**EEDMRPMG** (opt.)
Adjustable Trigger Level		—	—	—	—	—
Noise Reduction Circuit		—	Yes	—	—	—
Temperature		**MT586B1** (opt.)	**MT586B1**	—	**EEDM506C†** (opt.)	**EEDM506C†** (opt.)
Duty/Dwell		—	—	—	—	—
mS Pulse Width		Yes	—	—	—	—
Comp. Output (USB)		—	—	—	—	—
UL® Listed		cULus 61010-1	cULus 61010-1	cULus 3111	cULus 3111	cULus 3111
CAT Rating		CATIII 1,000V CAT IV 600V	CATIII 1,000V CAT IV 600V	CATIII 600V	CATIII 600V	CATIII 600V
Easy Open Battery and Fuse Door		Yes	Yes	—	—	—
Glitch Capture		Yes	Yes (0.25 mS)	—	—	—
Low Pass Filter (LPF)		—	Yes	—	—	—
Blown Fuse Identifier		Yes	Yes	—	—	—
Dimensions, inches		3 13/16 x 8 x 2 13/32	9 x 4 1/4 x 2	6 x 3 x 2	6 x 3 x 2	6 x 3 x 2
Case or Zipper Pouch		**EEDM650CPB (opt.)**	**EEDM650CPB (opt.)**	**EEDM504B4 (opt.)**	**EEDM504B4 (opt.)**	**EEDM504B4 (opt.)**
Replacement Fuses		**EEDM604C1 EEDM604C2**	**EEDM604C1**	—	—	**EEDM504B1**

*Certified and *UL* listed
***Blue-Point*
† CE

TECHNICAL SUPPORT 1-888-382-6522

EETA501C

EETA502C

EETA503C

EEDM5030

EEDMRPMG

EEDMRPMD

EEDM5997

EEDMDVA

EEDM5830

EETA106B

EETA501C Clamp on Amp Probe
- Measures AC and DC currents greater than 10A without breaking the circuit
- Ideal for measuring starter (A) and automotive current draw
- Used with DMMs that have 2V and 200 mV AC and DC ranges
- Range: 0–20A on 200mV AC or DC, 0–400A on 2V AC or DC

EETA502C Clamp on Amp Probe
- Similar to EETA501C except range is 0–2,000A AC or DC

EETA503C Low Current Adaptor
- AC/DC low current adaptor for digital multimeters with DC mV range and 10mA impedance
- Measures parasitic current draw on battery cable when key is in off position to indicate component failures or shorts
- Quickly measures branch circuit draw to isolate problem area
- Safely measures current draw of electrical fuel pumps
- Measures from 10mA–60A

EEDM5030 Pressure Adaptor
- Measure pressure from 1–500 PSI and vacuum from 1–29 inHg
- Output is 1mV DC per PSI or inHg
- Ideal for measuring transmission or hydraulic pressure
- 1/4" NPT fitting on pressure transducer
- Sensor compatible for air or liquid
- 6 1/2' cable length

EEDMRPMG Gasoline Engine RPM Adaptor
- Ideal for small, single cylinder, 2 and 4 stroke gas engine applications
- Use with any digital multimeter that has DC mV ranges to measure gasoline engine RPM
- Plug adaptor into DMM (set to DC mV function), clip lead above engine spark plug boot and multiply reading by ten
- Range is 300–6,000 RPM
- Output is 1mv DC per 10 RPM
- Powered by 9V battery (included)

TECHNICAL SUPPORT 1-888-382-6522

EEDMRPMD Diesel Engine RPM Adaptor
- Ideal for small diesel engine applications
- Measures diesel engine RPM
- Plug adaptor into the DMM (set to IP), attach transducer to fuel line leading to an injector and read RPM on the meter
- Range is 300–4,000 RPM
- Resolution is 1 RPM, powered by 9V battery (included)

EEDM5997 DMM RPM Adaptor
- Use with 2 or 4 stroke engines
- Use in conjunction with an automotive feature meter with IP (inductive pick-up) setting
- For motorcycles, outboard motors, snowmobiles and ATVs with limited or no ignition shielding
- Internal circuitry filters out noise
- Non-intrusive pick-up features dual tapped coils to help eliminate errors

EEDMDVA Direct Voltage Adaptor
- Converts outboard marine, motorcycle and other small engine ignition pulse signals into DC voltage signals
- Adaptor helps identify secondary ignition problems like failed individual coil packs or poor spark

EEDM5830 Amp Adaptor
- Allows DMMs to accurately measure up to 30A AC/DC by converting the signal to millivolts
- Measure current draw of individual circuits from fuse box on automobiles, trucks and buses
- Measure the parasitic load on the battery
- Requires no internal/external power supply
- Range of 0–30A

EETA106B Inductive Pick-Up (Blue-Point®)
- Non-intrusive pick-up slides over to secondary ignition spark plug wire and snaps shut for quick hook-ups without directly connecting to ignition circuit
- Used on most engines with 2 and 4 cycle ignition systems including small engines and waste spark systems

⚠WARNING
- Do not use in environment with explosive vapor
- Read safety precautions on pages W1 to W4

DIGITAL MULTIMETER ACCESSORIES

EEDM506D

EETH501C

EETH502B

EETH503B

MT586-4

Temperature Probes and Adaptor

EEDM506D Temperature Adaptor
- Adds temperature capabilities to multimeters that do not have built-in temperature functions
- Provides dual temperature and differential temperature measurements for multimeters
- Output equals 1mV per degree
- Use with any multimeter with 200mV DC and/or 2V DC ranges
- Provides readings from -50 °F–1,800 °F. Includes two beaded K-type temp probes. Low battery indicator light. Accuracy: ±0.75% of full scale + one digit

EETH501C Temperature Probe
Measures temperature in fluids and soft materials.

EETH502B Temperature Probe
Measures surface temperatures 8" tip.

EETH503B Temperature Probe
Measures air temperatures 8" tip.

MT586-4 Temperature Probe

TEST LEADS

EEDM504B3

EEDM504B3 Test Lead Set with Alligator Clips
- Standard vinyl jacketed set of test leads with screw on alligator clips for basic application testing needs
- Screw-on probe protectors limit the metal probe shaft from touching during testing for safety (remove the protectors when using alligator clips or adaptors)

MTTL504

MTTL504 Fused Test Leads
- 48" fused test leads help protect unfused digital multimeters from electronic damage
- Provides additional protection when measuring high voltage
- Includes test lead set with alligator clips and five extra fuses
- Overall length is 48"

MTTL5041 5A Fuses
- Three-pack of replacement 5A fuses for MTTL504 fused test leads

EETA107B

EETA107B Shielded Test Lead
- Shielded test leads block out radio frequency interference (RFI)
- 6" leads are heat and oil resistant

EETA108B Extra Long Scope Lead Set (2 pack)
- 10" leads extend the reach of scope/meter leads for testing hard-to-reach components

EETA108B

TL2A Test Lead Set
- High grade test lead pair fits all meters using standard banana plug jacks
- Nonslip prodding probes have stainless-steel points
- Coiled cords stretch to more than 60"
- Screw-on alligator clips convert the leads to jumper wires
- Banana plug screws allow use with most multimeters

TL2A

TL3A Test Leads
- Heavy duty pair of jumper leads
- Use to connect a power source or a ground to test a fixture in automobile
- Heavy duty alligator clips feature the "bed of nails" concept
- Banana plug screws allow use with most multimeters

TL3A

MTTL725 Hard Tip DMM Test Lead Set
- 58" length offers a greater reach advantage
- Silicone double insulation wire jacket for safety–if outer jacket is nicked, a white under layer is revealed
- 90° serrated flexible strain relief for improved long life
- Sleek threaded insulator tips provide easy access to tight spots and allows use of current accessories
- Special tip configuration is designed to accept push-on accessories
- Snap-on® logo and part number molded in the test lead ends
- CAT III 1,000V, CAT IV 1,000V safety rating
- CE

MTTL725

MTTL575

MTTL575 DMM Test Lead Set, 70"
- 70" length offers greater flexibility in reach
- Silicone double insulation wire jacket for safety – if outer jacket is nicked, a white under layer is revealed
- 90° serrated flexible strain relief protects the wire from being kinked at the probe or terminal ends for longer life
- Push/pull finger collar for sure grip pressure putting on or pulling off
- CAT III 1,000V, CAT IV 600V safety rating
- Protective plastic collar surrounds the banana jack for safety
- CE

Applications:
- The MTTL575 enables long distance testing such as brake lights and underhood while in the cockpit
- Acts as an extension cord for even longer reach when servicing large equipment
- Can be used in high-heat situations around manifolds or exhaust systems
- Jacket material will not burn, even in a flame
- Remains flexible in extreme cold where poly products get hard or stiff

TLS7B

TLS7B Test Lead and Adaptor Kit

- Quick attach probes and mini alligator clips press onto the straight PVC jacketed lead set
- Threaded hook clips, standard plugs and alligator clips thread onto the probe ends
- Provides an economical set for conducting various tests

Stock No.	Description	MTTL500	MTTL600	MTTL700	MTTL800
MTA20	Prods – Modular	•			
MTA24	Test Leads Silicone Jacket – Modular	•			
MTA70	Set, Alligator Clips, Screw-on				
MTA75	Alligator Clips – Medium – Modular	•			
MTA80	Spring Hooks – Modular	•			
MTA85	Alligator Clips – Heavy Duty – Flanged	•			
MTTL505	Set, Grabber Leads				
MTTL7001	Test Leads Silicone Jacket – Threaded			•	
MTTL7002	Banana Plugs – Screw-on		•	•	
MTTL7003	Alligator Clips – Large – Modular		•	•	
MTTL7004	Insulation Piercing Prods – Modular		•	•	
MTTL7005	Backprobe Adaptors – Needle – Modular		•	•	
MTTL7005PK	Kit, Test Leads, Modular				•
MTTL800-1	Modular Test Leads				•
MTTL800-3	Crocodile Clips				•
MTTL800-4	Piercing Probes				•
MTTL800-5	Grabbers 90° Test Leads				•
MTTL800-6	Prods				•
MTTL800-7	Spring Hooks 90°				•
MTTL800-PB	Storage Pouch				•

*CE

MTTL300

MTTL300 Test Lead Kit

- Four color-coded test leads help reduce the chance of wrong connections
- Use as test lead,jumper wires or for shorting out components when performing ignition system tests
- Each lead is 4" long

MTTL301

MTTL301 Test Lead Kit

- Contains 12", 18", 24", and 10" jumper leads
- Use as extension leads or for shorting out components when testing ignition

MTTL800

High Grade Test Leads (For Digital Multimeters)

MTTL500

MTTL500 Test Lead Kit

- Interchangeable probes permits wider range of testing possibilities
- Right angle 48" long test leads are made from double insulated silicone super flex wire
- Spring hooks for use on 16 gauge and smaller bare wire
- Alligator clips for attachment to bolts and large wire conductors
- Spade terminals for use on terminal blocks and prods for probing wire ends

MTTL505

MTTL505 Grabber Lead Set

- Grabber leads slide in to grab wire or terminal ends in tight areas
- Recommended for use with MTTL500 modular test lead set or MTTL700 with the MTTL7002 screw-on banana plug adaptors
- Use with any threaded test lead set using the MTTL7002
- Finger grip and plunger placement provides technician-controlled placement of the jaws even under extreme conditions
- Jaw gripping pressure securely bites on the target terminal or wire
- Plunger and finger grip allow maximum jaw opening with minimum pressure for ideal placement, enabling a good contact
- Safety CAT III 1,000V, 10A rating. cULus61010 and IEC61010 listed

MTA70 MTTL600 MTTL700

MTA70 Alligator Clip Set

- Screw-on style alligator clips for use with EEDM504B3
- Do not use with MTA24

MTTL600 Test Lead Kit

- Includes screw-on banana plug adaptors, needle backprobe adaptors, large alligator clips and insulation piercing prods

MTTL700 Test Lead Kit

- Includes screw-on banana plug adaptors, needle backprobe adaptors, large alligator clips and insulation piercing prods
- Test leads with interchangeable tips are 50" long
- Double insulated silicone wire is heat and flame resistant and flexible in extreme cold conditions

WARNING

- Do not use in environment with explosive vapor
- Read safety precautions on pages W1 to W4

TEST LEADS

YA1175KIT

Retractable Test Leads (Blue-Point®)

YA1175KIT Retractable Test Lead Kit
- Includes YA1175
- Retractable test leads, YA1175-1 probes (pair), YA1175-2 alligator clips (pair) and YA1175-3 spring hooks (pair)
- Retractable test leads pull out and stay at desired length
- Rewind test leads when not in use for compact storage
- 18 gauge copper wire and interchangeable tips
- CE

TECHNICAL SUPPORT 1-855-799-8880



MTTL7005PK

MTTL7006

MTTL502

MTTL720

MTTLB720

Backprobes

MTTL7005PK Backprobes
- Color-coded for easy identification
- Bendable stainless steel tips (standard diameter)
- Non-intrusive probes slide behind terminals
- Modular ends attach quickly

MTTLBOOTS Replacement Boot Kit
Five of each (black, red, yellow, green, blue)

MTTL7006 Micro Tip Backprobes
- Features a 0.5 mm tip diameter that has enough muscle to probe new smaller interior vehicle compartment connector terminals
- Smaller diameter enables a wider array of terminal applications
- Modular test lead ends for quick attachment
- Replaceable threaded tips make change out easy
- MTTL7005 series is best used under the hood of vehicles as they provide more body for the pressure needed to penetrate the weather pack material surrounding the terminal connections
- Use with Test Leads and Multimeter
- 4 ½" overall length
- 4 mm standard female banana jack
- Red and black color per set
- Rated to DC 60V

MTTL502 Insulation Piercing Test Probes
- Use probes on threaded probe tips
- Banana adaptors included so probes can be used on banana plug lead sets

MTTL720 Backprobe Pin Kit
- Just slip the probing pin into the backside of the electrical connector and attach the meter lead to the alligator clip at opposite end of the pin
- Five colors (black, red, yellow, green, blue) make circuit identification easy
- Each color-coded group of pins contains four pins for multiple simultaneous test points
- Sharp pin point easily pierces the wire insulation
- Insulated boots protects the circuit being tested from shorting between circuits and/or a short circuit to ground
- The probing pin can be bent to access an electrical connector at unusual angle for awkward connections
- Compact size makes the pins easy to fit in tight spots

MTTLB720 Multi-Backprobe Pin Kit
- Includes five of each: 45° sharp, 45° blunt, 90° sharp, straight sharp

TL616AO TL624AG TL648AR

TLR6B TLBR6B

High Visibility Jump Leads

TL Series High Visibility Jump Leads
- High grade test leads offer the highest heat and oil resistance and exceptional coil memory
- Leads feature a removable “bed of nails” concept
- After removal, probe end with 8-32 brass thread allows use of other product accessories

TL616AO Test Leads
Hi-vis orange color, 16' extended length.

TL624AG Test Leads
Hi-vis green color, 24' extended length.

TL648AR Test Leads
Hi-vis red color, 48' extended length.

Intrusive Circuit Testing Adaptors

- High quality “bed of nails” wire piercing adaptors
- These alligator style clips allow circuit testing when back probing is not desired or practical

TLB6B Adaptor
Straight nose test clip with black boot.

TLR6B Adaptor
Straight nose test clip with red boot.

TLBL6B Adaptor
Straight nose test clip with blue boot.

TLBB6B Intrusive Circuit Testing Adaptor
15° bent nose test clip with black boot.

TLBR6B Adaptor
15° bent nose test clip with red boot.

TLBBL6B Adaptor
15° bent nose test clip with black boot.



MTTL310

Coiled Jump Leads

Stock No.	Coiled Length, inches (cm)	Stretched Length, inches (cm)	Crocodile Clip Opening, inches (cm)	Color
MTTL310-1	20 (51)	48 (122)	1/2 (1.27)	Black
MTTL310-2	20 (51)	48 (122)	1/2 (1.27)	Red
MTTL310-3	20 (51)	48 (122)	1/2 (1.27)	Green
MTTL310-4	20 (51)	48 (122)	1/2 (1.27)	Yellow

MTTL310 Coiled Jump Lead Set
- Four distinct colors facilitate easy identification of test circuits
- Crocodile clips on both ends securely grip terminal connections
- Coiled cord stretches to 48" (122 cm) for extra reach
- Coil cords recoil requiring minimum storage space and less tangling
- Heavy duty but flexible boots provide safety insulation and strain relief
- Soldered and clamped connections provide low signal loss and prolongs life

MTTL311

MTTL311 Coiled Jump Lead Set
- Four sizes facilitate various applications that make the job easier to complete
- Alligator clips on both ends securely grip terminal connections
- Coil cords recoil requiring minimum storage space and less tangling
- Heavy duty yet flexible rubber boots provide safety insulation strain relief
- Soldered and clamped wire connections to alligator clips provides low signal loss

Stock No.	Coiled Length, inches (cm)	Stretched Length, inches (cm)
MTTL311-1	10" (25)	12" (30.5)
MTTL311-2	11" (28)	18" (46)
MTTL311-3	13" (33)	24" (61)
MTTL311-4	24" (61)	120" (305)

Battery Adaptor

TLS4A Battery Adaptor
- 12V accessory adaptor supplies power to circuit testers and scanners as well as to most other 12V powered devices like car phones and lights
- Copper coated alligator clips with vinyl grips attach to battery terminals
- 3' cord length

TLS4A

WARNING
- Do not use in environment with explosive vapor
- Read safety precautions on pages W1 to W4

CIRCUIT TESTERS

EECT2H

EECT4H

EECT301H

EECT313H

EECT3HL

6- and 12-Volt Circuit Testers

- Used to detect DC Voltage, ground and circuit integrity
- Patented Instinct® Handle for style and comfort
- Molded internal contact links with the LED assembly top dimple for low loss signal transfer
- Smart LED design has more brilliant light output and longer life than traditional bulb (note: EECT3HL uses Classic Bulb Style)
- Copper Clip is a superior quality component for maximum electrical signal transfer
- Convenient circuit board and spring assembly

Specifications	EECT2H†	EECT4H†	EECT301H†	EECT313H†	EECT3HL†
Voltage	6 and 12V	6 and 12V	12V only	6 and 12V	6 and 12V
Cord Type/Color	Straight Cord Mini/Black	Straight Cord/Black	Coiled Cord/Black	Straight Cord/Black	Straight Cord Mini/Black
Cord Material/ Wire Gauge	Rubber/18	Rubber/18	Polyurethane/Dual 18	Rubber/18	Rubber/18
Outside Wire Diameter	4.0 mm	4.0 mm	4.5 mm	4.0 mm	4.0 mm
Cord Length, inches (extended)	70	70	125	70 plus 72" extension	70
Replacement Cord Assembly	**EECTCORDBLM**	**EECTCORDBLS**	**EECTCORDBLP**	**EECTCORDBLJ**	**EECTCORDBLM**
Replacement LED and Spring Assembly	**EECT2HLED**/White	**EECT4HLED**/White	**EECT301HLED**/ Red (Power), Green (Ground)	**EECT4HLED**/White	**2-5130** Classic Bulb
Handle Size/Color	Mini *Instinct*/Clear	Medium *Instinct*/Clear	Medium *Instinct*/Clear	Medium *Instinct*/Clear	Mini *Instinct*/Clear
Terminal End	Heavy duty – copper clip	Heavy duty – copper clip	Cigarette lighter adaptor	Banana plug on terminal end	Heavy duty – copper clip
Replacement Clip	**EECTCLIP2**	**EECTCLIP**	—	—	**EECTCLIP**
Boot	**EECTBOOT2**	**EECTBOOT**	—	—	**EECTBOOT**
Stainless Steel Shank Length, inches	2	3 5/8	3 5/8	1	3 5/8
Additional components	—	—	—	non-intrusive accessories and carrying case	—
Replacement Carrying Case	—	—	—	**EECT313HBAG**	—

* Note: In low voltage situations LED light will not dim as significantly as incandescent bulb style.

† CE

TECHNICAL SUPPORT 1-888-382-6522

EECT400

EECT400G

EECT400O

EECT400R

Digital Display 12V Circuit Tester

EECT400 Digital Display Circuit Tester

- Used to detect DC voltage, ground and circuit integrity
- LCD display provides a 'no guess' voltage value of the circuit
- Backlit LED indicates Green for Ground or Red for Power
- Provides one-handed operation of CT and DV Voltage digital display of a multimeter
- One hand free to jiggle wires, replace fuse or operate a switch
- Surge protected circuitry displays 3–19.99V DC (± 0.3V accuracy)
- Computer safe <10mA circuit draw for confident testing (Do not use on airbags)
- 3 1/2" stainless-steel corrosion-free shank
- Patented Instinct® Clear Handle for pure visibility, style and comfort
- Solid Copper Clip – superior quality component for maximum electrical signal transfer
- Terminal Screw Connection – ensures a positive electrical signal and easy field repair
- Superior Flex Wire – glides past components and remains flexible in cold conditions
- Convenient Field Replaceable – digital display board and spring assembly
- Molded contact and finger-turn strain relief are tough
- O-ring sealed moisture-free connection for longer life
- CE: DE, ES, FR, IT, GB, NL

Stock No.	EECT400†	EECT400G†	EECT400O†	EECT400R†
Voltage	6 and 12V DC	6 and 12V DC	6 and 12V DC	6 and 12V DC
Range	3–19.9V DC	3–19.9V DC	3–19.9V DC	3–19.9V DC
Resolution	0.1V DC	0.1V DC	0.1V DC	0.1V DC
Accuracy	±0.3V	±0.3V	±0.3V	±0.3V
Cord Color	Black	Green	Orange	Red
Cord Type	Straight Flexible Rubber	Coiled Flexible Rubber	Coiled Flexible Rubber	Coiled Flexible Rubber
Outside Wire Diameter	4.0 mm (0.16")	4.0 mm (0.16")	4.0 mm (0.16")	4.0 mm (0.16")
Cord Length, feet	6 (2 m)/18 gauge	6 (2 m)/18 gauge	6 (2 m)/18 gauge	6 (2 m)/18 gauge
Replacement Cord Assembly	**EECTCORD400**	**EECTCORD400G**	**EECTCORD400O**	**EECTCORD400R**
Replacement LED and Spring Assembly	**EECT400LCD**	**EECT400LCD**	**EECT400LCD**	**EECT400LCD**
Handle Size/Color	Medium *Instinct*/Clear	Medium *Instinct*/Clear	Medium *Instinct*/Clear	Medium *Instinct*/Clear
Display	Backlit 2000 count LCD	Backlit 2000 count LCD	Backlit 2000 count LCD	Backlit 2000 count LCD
Polarity	Bi-Directional	Bi-Directional	Bi-Directional	Bi-Directional
Surge Protected	Overload displays 1.0V, then resets	Overload displays 1.0V, then resets	Overload displays 1.0V, then resets	Overload displays 1.0V, then resets
Operating Temperature	0 °–120 °F (-18 °–50 °C)	0 °–120 °F (-18 °–50 °C)	0 °–120 °F (-18 °–50 °C)	0 °–120 °F (-18 °–50 °C)
Terminal End	Heavy duty copper clip	Heavy duty copper clip	Heavy duty copper clip	Heavy duty copper clip
Replacement Clip	**EECTCLIP**	**EECTCLIP**	**EECTCLIP**	**EECTCLIP**
Boot	**EECTBOOT**	**EECTBOOT**	**EECTBOOT**	**EECTBOOT**
Stainless-Steel Shank Length, inches	3 1/2	3 1/2	3 1/2	3 1/2
Length, inches (cm)	8 1/4 (20.96)	8 1/4 (20.96)	8 1/4 (20.96)	8 1/4 (20.96)
Weight, lb (kg)	0.4 (0.18)	0.4 (0.18)	0.4 (0.18)	0.4 (0.18)
Warranty	1 Year-Field Repairable	1 Year-Field Repairable	1 Year-Field Repairable	1 Year-Field Repairable
Computer Safe	Yes – 10mA or less draw (Do not use on airbags)	Yes – 10mA or less draw (Do not use on airbags)	Yes – 10mA or less draw (Do not use on airbags)	Yes – 10mA or less draw (Do not use on airbags)

† CE

TECHNICAL SUPPORT 1-888-382-6522

⚠WARNING

- Do not use in environment with explosive vapor
- Read safety precautions on pages W1 to W4

CIRCUIT TESTERS

EECT424

EECT424 24V Digital Display Circuit Tester (4–49V DC Range)

- Used to detect DC voltage, ground and circuit integrity
- LCD display provides a 'no guess' voltage value of the circuit
- Backlit daylight readable LED indicates Green for Ground or Red for Power
- Provides one-handed operation of CT and the DC Voltage digital display of a multimeter
- One hand free to jiggle wires, replace fuse or operate a switch
- Surge protected circuitry displays 4–49.9V DC (± 0.3V accuracy)
- Computer safe <10mA circuit draw for confident testing
- 3 1/2" stainless-steel corrosion-free shank
- Patented Instinct® Clear Handle for pure visibility, style and comfort
- Red cord, boot, shank insulation and printing on the handle identifies this unique circuit tester as the 24V model
- CE: DE, ES, FR, IT, GB, NL

TECHNICAL SUPPORT: 1-888-382-6522

Applications:

- Covers most auto, truck, industrial vehicles, buses, 36V rail cars and more from 4–49V DC

EECT200 Cord-Free DC Circuit Tester

- For quick detection of DC voltage
- Use on autos and trucks from 3–24V DC
- Probe the wire, touch metal ground on vehicle with free hand
- Black carbon infused contact area completes the circuit
- Buzzer and LED light alerts user to DC voltage presence
- Mini *Instinct* handle and short stainless shank for tight-access jobs
- Pocket clip to keep the first need diagnostic tool ready for work

EECT74

Specialty Circuit Testers

EECT74 Amp Hound

- Use on 6V, 12V and 24V Electrical Systems
- No need to remove a fuse which reduces the amount of time to determine the current in the circuit
- Finding parasitic drains can now be done without resetting the offending circuit
- No more pull a fuse, check the meter, pull a fuse, check the meter...Instead, check the complete fuse box quickly
- Will not short a circuit while the fuse is removed
- Touch the probes to the top of the fuse
- Tests all of the most common automotive fuses types and amp ranges
- Intelligent audible tones and digital displays

24V DC Digital Display Circuit Tester

Specifications	EECT424
Voltage	24
Range	4.0V DC – 49.9V DC
Resolution	0.1 V DC
Accuracy	± 0.3 Volt
Cord Color	Red
Cord Type	Straight/Polyurethane
Outside Wire Diameter	4.0 (0.16")
Cord Length, feet	6 (2 m)/18 gauge
Replacement Cord Assembly	EECTCORD424
Replacement LED and Spring Assembly	EECT424LCD
Handle Size/Color	*Instinct*/Clear w/ red print
Display	LCD w/ back light
Polarity	Bi-directional with color LED, red & green indicators
Surge Protected	Surge and high DC voltage
Operating Temperature	0 °–120 °F (-18 °–50 °C)
Terminal End	Heavy Duty Copper Clip
Replacement Clip	EECTCLIP
Boot	EECTBOOTR
Stainless-Steel Shank Length, inches	3 1/2 (8.9 cm)
Length, inches (cm)	8 1/4 (20.9)
Weight, lb (kg)	0.4 (0.18)
Warranty	1 Year (field repairable)
Computer Safe	Yes <10mA (not for use on airbags)

EECT200

EECT72

  - Active circuit unit beeps three times and displays amp value
  - Inactive circuit beeps continuously and displays (000)
  - Open or blown fuse will not beep and displays (- - -)
- CE: DE, ES, FR, IT, GB, NL

TECHNICAL SUPPORT: 1-800-537-1077

EECT72 Amp Hound 2

Same as EECT74 with additional features:

- Real time readings
- Plug in fuse adaptors
- Funtions with micro fuses

EECT180

Dynamic Test Leads

EECT180 LOADpro® Dynamic Test Leads
LOADpro finds these problems fast:
- High corrosive resistance
- Shorts to ground
- Open circuits

Specifications:
- Works with any DMM with standard banana plugs
- Test leads are 60" in length
- For use on circuits up to 28.5V
- Do not use on computer ECM input circuits
- *LOADpro* performs a voltage drop test with press of a button
- Steady pin probe tips – small recess allows probe to sit on connector pin
- Pressing the switch applies a load of 40mA per volt across the circuit (example: 40mA x 12V = .48A of load)
- Automotive, Heavy duty, Marine, RV and equipment

EEFF500

Data Bus Fault Finder

EEFF500 Data Bus Fault Finder
- Modern vehicles have 15–20 computers talking to each other on shared circuits that can fail
- Technicians can waste time searching for a serial data circuit failure or use this product
- The "go to" tool to diagnose scan tool communication failures
- User-controlled elimination of modules to isolate defects and find failure location
- Eliminate rogue/defective modules that lock up data bus via 12 switchable data circuits
- LED indicators that light amber for short to ground and red for short to power, plus a self test upon powering on
- 12 standard banana jacks for DMM probing
- Communicates via Data Bus Network Connector
- US Patent #7,664,579
- Two-year warranty

EEFF500-1 GM Star Cable
- GM Star Cable for EEFF500 Data Bus Fault Finder

EEFF500-2 GM Double Stack Cable
- GM Double Stack Cable for EEFF500 Data Bus Fault Finder

EEFF500-3 Breakout/Pigtail Cable
- Breakout/Pigtail Cable for EEFF500 Data Bus Fault Finder

EEFF500-4 DC Power Cord
- Power Cord for EEFF500 Data Bus Fault Finder

EEFF500-PB Storage Case
- Storage Case for EEFF500 Data Bus Fault Finder

TECHNICAL SUPPORT 1-888-704-9201

EEDMRACKM

EEDMRACKBJR

Storage Rack

EEDMRACKM Magnetic Test Lead Storage Rack
- Convenient rack to hold circuit testers, DMM lead sets, amp clamps, temperature probes and other accessories for multimeters
- Both racks can be mounted to wall with screws or placed on rollcab with magnetic back

EEDMRACKBJR DMM Banana Jack Storage Rack
- Convenient rack with banana jacks to hold test leads, back probes, adaptors and more

YA11167

OBD-II Breakout Box (Blue-Point®)

YA11167 OBD-II Breakout Box
- Provides easy access to all 16 OBD-II terminals and connection to scan tool
- Eliminates guessing which terminals are being probed
- Eliminates damage to vehicle terminals from probing
- Tester probes plug in securely so you are free to diagnose
- No more crawling under the dash
- Great for diagnosing inoperative communication links

WARNING
- Do not use in environment with explosive vapor
- Read safety precautions on pages W1 to W4

CIRCUIT TESTERS

EECT60660

Relay Kit

EECT60660 Deluxe Relay Test Kit
- Kit makes testing relays or live circuits quick and easy
- Includes eight jumpers to fit most popular relays
- Includes test lead kit for easily and securely connecting relay test jumpers to a multimeter
- Relay puller pliers easily remove electrical relays without damage to the relay or electrical box

EECT60660-1 Gray Test Jumper
EECT60660-2 White Test Jumper
EECT60660-3 Blue Test Jumper
EECT60660-4 Green Test Jumper
EECT60660-5 Orange Test Jumper
EECT60660-6 Red Test Jumper
EECT60660-7 Yellow Test Jumper
EECT60660-8 Purple Test Jumper
EECT60660-9 Orange Banana Plug Adaptor
EECT60660-10 Y-Terminal Lead with Green Plug
EECT60660-11 Terminal Lead with Blue Plug
EECT60660-12 Terminal Lead with Yellow Plug
LIL46950 Relay Puller Pliers
EECT60660-PB Storage Case

YA111KITA

Short Circuit Locator

YA111KITA Relay Shorting Plug Kit
- Plugs close normally open contacts and instantly determine which half of an output circuit is suspect
- Eliminates guessing which terminals to short
- Significantly reduces diagnostic time
- Kit works on all vehicles using standard four- and five-pin relays
- Avoids damage to relay socket as a result of probing

YA111-10A Relay Shorting Plug
YA111-15A Relay Shorting Plug
YA111-20A Relay Shorting Plug

EEFB310

EEFB315

Fuse Buddy® Kits

EEFB310 *Fuse Buddy* Pro Test Kit
- Great tool for reading circuit amperage draws and troubleshooting up to 30A
- Includes: one meter with three interchangeable test functions: 30A MINI circuit current testing, 30A ATC circuit current testing and 30A all purpose current test
- Plugs directly into MINI and ATC fuse sockets
- Original fuse is replaced in line, thereby maintaining circuit protection
- Measuring range: 0–30A/48V DC – 10 seconds
- Accuracy: ±2% of reading
- Resolution: 100mA

EEFB315 Max *Fuse Buddy* Kit
- MAXI circuit testing capability up to 80A
- Works with ATC and MINI circuits (adaptors included)
- Unit features peak hold functions and one-touch zero function
- Use on antilock brake circuits, car stereo circuits, power distribution circuits, marine and automotive branch circuits, rear window defogger circuits, solar power DC branch circuits, traction control circuits, solar charge controller circuits and heavy duty equipment circuits
- Amps: 0–80A DC
- Resolution: 0.1A
- Accuracy: ±2.0% of reading + four digits

YA8006

YA8005

Fuse Savers

YA8006 Master Fuse Saver Kit
- Dual type fuse box connector with 10' cord allows you to move around the vehicle shake testing wires while looking for the short
- No wasted fuses
- Includes: 5A, 10A, 15A, 20A and 30A resetting breaker handles, buzz alert module and six fuse adaptors
- Use when installing radios, CD players, radar detectors and other accessory equipment
- CE

YA8005 Fuse Saver Kit
- Dual type fuse box connector with 10' cord allows you to move around the vehicle testing wires while looking for the short
- Includes: 10A, 15A and 20A resetting breaker handles
- Use when installing radios, CD players, radar detectors and other accessory equipment

Accessories
YA8005-EXT 10' Extension Cord
YA8005-11 Buzz Alert Adaptor

YA8026

YA8027

YA8028

YA8029

TLT8003

TLT8000

TLT5

TLT6

TLT7

YA3179B

Trailer Harness Testers and Adaptors

YA8026 Towing Maintenance Kit
- Use for four-/five-pin vehicle side circuit testing and cleaning
- Test, clean and repair truck and trailer connections
- Great preventative maintenance tool
- Extends harness life
- Eliminate guesswork, reduce down time and improve safety
- Kit includes: four-/five-pin tester, terminal cleaning tool and 2 mL tube of DeoxIT® electric contact cleaner
- Packaged in compact clamshell

YA8027 Towing Maintenance Kit
- Use for six round pin vehicle side circuit testing
- Test, clean and repair truck and trailer connections plus light assemblies
- Great preventative maintenance tool
- Extends harness life
- Eliminate guesswork, reduce down time and improve safety
- Kit includes: six round pin tester, two terminal cleaning tools and 2 mL tube of *DeoxIT* electric contact cleaner
- Packaged in compact clamshell

YA8028 Towing Maintenance Kit
- Use for seven spade pin vehicle side circuit testing and cleaning
- Test, clean and repair truck and trailer connections
- Great preventative maintenance tool
- Extends harness life
- Eliminate guesswork, reduce down time and improve safety
- Kit includes: seven spade pin tester, two terminal cleaning tools and 2 mL tube of *DeoxIT* electric contact cleaner
- Packaged in compact clamshell

YA8029 Towing Maintenance Kit
- Use for seven round pin vehicle side circuit testing and cleaning plus seven round pin connector cleaning
- Test, clean and repair truck and trailer connections
- Great preventative maintenance tool
- Use as a pin wear gauge on trucks and trailers
- Eliminate guesswork, reduce down time and improve safety
- Kit includes: YA3179B seven round pin tester, IPA8024-AS1 and IPA8024-AS2 two round pin terminal cleaners plus 2 mL tube of *DeoxIT* electric contact cleaner

Electrical Brushes

AC41C

AC41C Taillight Socket Brush
- Stiff carbon steel wire bristles
- 6 5/8" long

TLT8003 Trailer Plug Adaptor (Blue-Point®)
- Converts 12V feed at the back of a truck or SUV trailer socket to a dual 12V power outlet
- Powers 12V test equipment, charging equipment and work lights in shop environment
- Recreation purposes such as running air pumps, radios or TVs while tailgating and camping
- Plugs into any seven-way spade pin trailer connection

TLT8000 3-Way Trailer Adaptor
- Adapts seven-way connection to six round pin and four-/five-pin connections
- Sealed plugs to keep road debris from corroding connections
- Winged grip for easy installation and removal
- Use on medium/light duty trucks, 1/2, 3/4 and 1 ton pickups, campers and other heavy duty applications

TLT5 Trailer Harness Tester
- Easily locates electrical problems in the tow vehicle
- Checks both four- and five-pin flat trailer connectors with LED indicator lights
- Tests left and right signals, brake lights and running lights

TLT6 Trailer Harness Tester
- Checks six-pin round trailer connectors with LED indicator lights
- Same applications as TLT5

TLT7 Trailer Harness Tester
- Checks seven spade/flat pin trailer connectors with LED indicator lights
- Same applications as TLT5

YA3179B Circuit Chaser
- Round pin circuit chaser for semi trailers
- Test the semi trailer plug and cable
- Both male and female ends so technician can isolate a fault to trailer or cable
- Can temporarily repair short circuits in the shop or on the road
- Includes: five jumper tabs and one replacement prong

MTAC110

AC Voltage Sensor

MTAC110 AC Voltage Sensor
- Non-intrusive AC sensor detects voltage from 110–600V AC
- Use to ensure the absence of current before working on a circuit
- Move probe tip along an insulated wire, near an outlet or near a circuit breaker and tip will glow if voltage is present

WARNING
- Do not use in environment with explosive vapor
- Read safety precautions on pages W1 to W4

LEAK DETECTORS

EELD500

EELD500CVR

EELD500-4

EELD500C02

Portable Diagnostic Smoke Machine

Stock No.	EELD500
Power Supply	12V DC
Power Consumption	12/18V DC, 25 amps
Supply Volume	10 liters per minute
Line Length/Smoke Supply, ft. (m)	8 (2.44)
Line Length/Power Supply, ft (m)	8 (2.44)
Line Length/Remote Starter, ft (m)	50 Range
Weight, lb (kg)	11.5 (5.25)
Overall Dimensions, inches (mm)	12W x 9D x 12H (310W x 230D x 310H)

EELD500 Portable Smart Smoke® Machine

- Portability, take it under and around vehicle with optional 14.4V Ni-Cad or 18V Li-Ion battery and operate using cordless remote control or connect to vehicle 12V battery
- Necessity, eight of the top emission DTC codes can be diagnosed with *Smart Smoke* technology
- Computerized digital readout displays leak sizes down to 0.001" - LPM and Pressure/vacuum in H_2O
- Smart, self calibrates for .010", .020", .040" and automatically preforms EVAP pass/fail test
- One touch EVAP testing with automatic pass or fail
- Low flow mode makes it easier to find leaks
- Vacuum port adaptor to diagnose Chrysler® ESIM and NVLD systems
- Find leaks, the evaporative emissions diagnostic smoke machine delivers EVAP testing and general purpose applications
- Conveniently functions with OEM specified nitrogen, portable $C0_2$ (ships empty) bottle or shop air
- Patented UltraTraceUV® dye solution pinpoints leaks
- OEM approved smoke technology
- Smoke solution is safe and does not produce unpleasant odor in the shop
- Unit ships with enough smoke solution to perform 200 tests – EELD500-1
- Three-button control display select, Orifice select and Start
- Combo LED and UV light in one and remote control are included
- Convenient hanger for under car and under hood use
- Lightweight and compact stores in large bottom roll cab drawer or hang with optional cover to protect from shop dirt and dust
- Product support: three-year warranty, instructional video SS3229
- Patents #6,526,808 #6,439,031, #6,392,227
- Other patents pending

EELD500 Smoke Machines Includes:
EELD500-1 8 oz Bottle of *UltraTraceUV* Dye Solution
EELD500-2 Large Adaptor Cone
EELD500-3 Vacuum Adaptor
EELD500-4 Combination LED UV Light and Yellow Glasses
EELD500-5 Removable Battery Clamp Lead Set
EELD500-REM Remote Control
EELD500-Z User Manual
EELD301A2 Assorted Cap-Plug Set
EELD301A3 Exhaust Cone (1" x 3.5" Diameter/6" Long)
EELD301A4 Smoke Diffuser (for finding wind/water leaks)
EELD302A2 EVAP Service Port Adaptor Fitting – Standard Size
EELD302A4 Dual-Size Schrader Removal/Installation Tool
Optional Accessories for EELD500
EELD500C02 C02 Bottle and Regulator
EELD500CVR Protective Cover
CTC620 Battery Charger
CTB4187 18V Slide-on Battery
EELD500-1 Additional 8 oz Bottle of Solution
EELD500-6 Second Smoke Hose
YA4000B Vacuum Pump
EELDGASCAP Gas Cap Adaptor (3 pack)
EELDGASBMW Gas Cap Adaptor BMW® (1 each)

TECHNICAL SUPPORT 1-800-901-1988

EELD100A Diagnostic Smoke Machine (EVAP)

- Find Leaks – Contains Diagnostic Smoke® technology for EVAP testing and general purpose applications
- Necessity – eight of the top ten Emission DTC codes can be diagnosed with this unit
- Patented UltraTraceUV® non-contaminating dye solution pinpoints leaks smoke alone cannot
- Smoke solution does not produce an unpleasant odor in the shop
- Combo LED and UV light in one, plus special glasses are included
- Variable Flow Control manually reduce flow to help pinpoint the exact location of a leak
- Conveniently functions with OEM specified optional nitrogen, portable CO_2 bottle (ships empty) or shop air
- OEM approved smoke technology
- Unit ships with enough smoke solution to perform 200 tests
- Convenient hanger for under car and under hood use
- Lightweight and compact stores in large bottom roll cab drawer or hang with optional cover to protect from shop dirt
- CE, DE, ES, FR, IT, GB, NL

PATENTS

- Nitrogen Patent #6,526,808
- Nitrogen with Dye Patent #6,439,031
- Dye Patent #6,392,227

STANDARD ACCESSORIES

(Included with EELD100A)

- EELD500-1 8 oz Bottle *UltraTraceUV* dye solution
- EELD301A2 Assorted Cap Plug Kit
- EELD301A3 Exhaust Cone (1"–3.5" DIA, 6"L)
- EELD301A4 Smoke Diffuser
- EELD100-4 Combination UV light and Glasses
- EELD302A2 EVAP service port fitting
- EELD302A4 Schrader removal/ install tool
- EELD100A-Z User manual in seven languages

OPTIONAL ACCESSORIES

- EELD500C02 CO_2 Bottle and Regulator
  – EELD500C02 ships empty and needs to be filled at a hardware store
- EELD500CVR Protective Cover
- EELD500-1 Additional 8 oz Bottle of Solution
- EELDGASCAP Gas Cap Adaptor 3pc
- EELDGASBMW One Gas Cap Adaptor BMW®
- EELD100A-3 Smoke Hose Extension with nozzle
- EELD100A-4 Tee Connector with Delrin® nozzle
- EELD301A1 Nitrogen Hose
- EELD302A3 EVAP Port Adaptor (Ford® service)

EELD100A

Stock No.	EELD100A†
Power Supply	12V DC
Power Consumption	12V DC, 25A
Supply Volume	10 L/min
Line Length/ Smoke Supply, ft (m)	8 (2.44)
Line Length/ Power Supply, ft (m)	8 (2.44)
Line Length/ Remote Starter, ft (m)	10 (3)
Weight, lb (kg)	11.5 (5.25)
Overall Dimensions, inches (mm)	12H x 13D x 12W (305H x 229D x 305 W)

†CE

EELD500 and EELD100A APPLICATIONS

• Air cleaner assembly • Air ducts • Air valves • Cylinder heads • Diaphragms • EGR valve • EVAP • Exhaust manifolds • Exhaust pipes and mufflers • Fuel Tank Pressure Sensor • Intercooler • Intake gaskets • Injector o-rings • Loose clamps • MAP sensors • Mass air flow meter • Oil leaks • PCV valve and hoses • Throttle body shaft • Turbos • Vacuum hoses • Vacuum switches • Wind and water

Evaporative Emissions *Diagnostic Smoke* Vapor Producing Machines – Feature Comparison

	EELD500	EELD100
Uses *Diagnostic Smoke* vapor technology developed in collaboration with *Ford* Motor Co., GM®, Daimler Chrysler® and approved by most major OEMs.	•	•
Patented non-contaminating *UltraTraceUV* dye solution pinpoints the leak. The only dye solution mandated by most major OEM's. Will not harm activated charcoal canister, ORVR valve, purge valves, catalytic converters, O_2 sensors, seals or gaskets and determined not to void vehicle factory warranty.	•	•
The only Patented technology (STAR) that meets specifications when OEMs require nitrogen for safer EVAP system testing.	•	•
Designed with an electronic Safety Valve that automatically shuts off air flow into the vehicle's EVAP system when the machine turns off. This stops gasoline fumes from exiting the EVAP system and filling your work bay.	•	•
TECH LINE Supported 1-800-901-1988 for end user to help with any and all EVAP problems.	•	•
Vacuum / Pressure Gauge for vacuum / pressure decay.	•	•
Convenient Hook with fold down handle for hanging under car or under hood and easy storage in tool box.	•	•
Ability to read and display leak size of .010".	•	•
10-Year Warranty On Bosch Glow Plug a reliable heating system that lasts much longer than fiberglass wick-style units.	•	•
Variable Flow Control manually reduces flow to help pinpoint the exact location of a leak.		•
Low Flow Pulsating Mode automatically adjusts flow to optimal setting to help find small leaks.	•	
One-Touch EVAP Testing with automatic pass or fail.	•	
Variable Flow Control manually reduces flow to help pinpoint the exact location of a leak.	•	
Low Flow Pulsating Mode automatically adjusts flow to optimal setting to help find small leaks.	•	
One-Touch EVAP Testing with automatic pass or fail.	•	
Vacuum Port Adapter can apply hand vacuum pump for testing Fuel tank Pressure Sensors, *Chrysler* ESIM & NVLD systems. Also gives you dual smoke hose capability.	•	
100% Portable to work off site, or anywhere outside of work bay area with optional Snap-on® power tool battery and CO_2 kit.	•	
Computerized Digital Display down to .001" means you're prepared for any industry leak standard changes.	•	
Computerized Digital Display Reading Flow in Liters per Minute to make sure factory specs are met.	•	
Computerized Digital Display Reading Pressure / Vacuum in H_2O to compare to FTP Sensor for in-depth diagnostic ability.	•	
Sleep Mode with Memory retains test results if machine shuts down after five minutes.	•	
Option of using vehicle battery or 12 volt, 14.4 volt NiCad,18 volt NiCad or Lithium *Snap-on* Cordless Batteries.	•	
Cordless remote so there is no need to walk back and forth when doing a job.	•	
Micro-processor touch pad for quick and easy operation.	•	
Ability to Choose Inert Gas at start-up for 100% accurate results.	•	

⚠WARNING

- Do not use in environment with explosive vapor
- Use only in well ventilated area
- Read safety precautions on pages W1 to W4

LEAK DETECTORS

EELDGASCAP

EELD302REG

EELD500-1

EELDGASCAP1 Fuel Tank Filler Neck Adaptor (Blue-Point®)
- Quickly pops on virtually any filler neck
- Costly replacement seals are no longer needed
- One size fits all (new model vehicles may be subject to change)

EELDGASCAP Fuel Tank Filler Neck Adaptor
- 3 pack of EELDGASCAP1

EELDGASBMW Fuel Tank Filler Neck Adaptor
- Single for BMW® vehicles

EELD302REG Gas Flow Regulator *(Blue-Point)*
- 100 PSI preset regulator guarantees proper operating pressure for any smoke machine
- Easily connects to nitrogen cylinder (optional)

EELD301A1 UltraTraceUV® Smoke Solution
- *UltraTraceUV* brand smoke producing solution for use with EELD301A/EELD302B smoke machines
- Single 12 oz bottle

EELD500-1 *UltraTraceUV* Smoke Solution
- Single 8 oz bottle

ACT790A

ACT790A Combustible Gas Detector
Find leaks in fuel and exhaust systems plus verify integrity of fuel storage containers. Detectable compounds include acetylene, iso-butane (R600a), methane, ethane (R170), propane (R290), hydrogen, acetone, methanol and gasoline. Probe length of 17". Uses four AA alkaline batteries. Conforms with SAEJ1627 and is designed to conform with SAEJ2791. Body length of 10 3/8". Includes storage case.

- Numeric leak size indicator
- Audio mute function
- Automatic calibration
- Comfortable neoprene grip
- Intrinsic safety certified
- Three levels of sensitivity
- Flashing probe LED visual leak indicator
- Long life sensor
- High impact injected molded instrument case
- Two-year warranty on detector, two-year warranty on sensor
- CE

HANDHELD GAS ANALYZERS

MT706A

Carbon Monoxide Analyzer

MT706A Carbon Monoxide Analyzer *(Blue-Point)*
- Monitor and test adjustments affecting carbon monoxide emissions from gas powered vehicles, propane powered forklifts plus other combustion style equipment
- Flow indication warns of restricted emissions flow due to clogged or pinched lines
- Backlit display for ease of reading in dim light
- Range is 0%–10% CO (approx. 100,000 PPM)
- Response time is 90% of reading in less than 60 seconds
- CE

TECHNICAL SUPPORT: 1-888-382-6522

HHGA5B

HHGA5BP

HHGA5B Handheld Gas Analyzer Kit (5 Gas)
Independent Handheld 5 Gas Analyzer or use with MODIS™ Link, VERDICT® and VERUS® Bluetooth® link.

- Fully Portable 5 Gas Analyzer, go anywhere, use anywhere
- 110V AC and 12V powered
- Internal rechargeable battery, up to one hour use
- Ideal for road testing and mobile use
- Measures exhaust emissions for CO, CO_2, HC, O_2, NOx and AFR/Lambda
- Provides an instant assessment of an engine vehicle exhaust and catalytic converter
- *MODIS*, *VERDICT* and *VERUS* Link for enhanced real-time viewing
- Setup required with included software on USB stick
- Gather all the evidence required for effective and accurate vehicle diagnostics on one screen in real time
- View, graph, save and recall data
- Monitor and reduce vehicle emissions, improve driveability and fuel efficiency
- There are 255 memory locations in the analyzer to track and print data for the same or many different vehicles
- Compatible with gasoline, CNG, propane and diesel fuel types
- Service is handled at Crystal Lake Northern Repair-Annual Cal and sensor replacement. Meets required industry standard
- Problems in ignition system (Spark plugs, wires)
- Engine compression problems
- Temperature sensor malfunction
- EGR Valve problems
- Dirty air filter

TECHNICAL SUPPORT: 1-888-717-1333

- Obstructed intake valve ports
- Lambda Sensor failure
- Excessive Fuel Consumption
- Misfire
- Rusted exhaust (internal or external rust)
- Non-homologated exhaust (wrong back pressure)
- Melted catalytic converter
- Worn out catalytic converter
- Obstructed exhaust or catalytic converter

HHGA5BP Handheld Gas Analyzer Kit (5 Gas)
Same features as HHGA5B, includes printer and hard storage case.

Accessories

HHGA-8 Motorcycle Exhaust Probe
- Optional motorcycle exhaust probe for HHGA series gas analyzers

HHGA-9 Five Gas Exhaust Probe
- 5 gas exhaust probe for HHGA series gas analyzers

HHGA-11 Filters
- Filters for HHGA Series gas analyzers

HHGA-16 AC Adaptor
- Designed for use in the service bay

HHGA-17 12 V Adaptor
- Designed for use in the service bay or on the road

HHGA-18 Paper Roll
- Replacement paper roll for HHGA-5 infrared printer

HHGA-PRINTER Infrared Printer
- Infrared printer for HHGA series gas analyzers

⚠WARNING

- Do not use in environment with explosive vapor
- Use only in well ventilated area
- Read safety precautions on pages W1 to W4

VIDEOSCOPES

Specifications	BK5600	BK6500	BK8000
Power Supply	6 AA Alkaline Batteries	3.7V Li-ion, 2600 mAh 9.6 watt hour battery	(2) 3.7V Li-ion, 2600 mAh 9.6 watt hour battery
Width, inches (mm)	Viewer: 1.77 (45)	Viewer: 1.77 (45)	Viewer: 1.77 (45)
Length, inches (mm)	Viewer: 7.2 (180); Imager: 36 (0.91)	Viewer: 7.2 (180); Imager: 36 (0.91)	Viewer: 7.2 (180); Imager: 36 (0.91)
Height, inches (mm)	Viewer: 3.94 (100)	Viewer: 3.94 (100)	Viewer: 3.94 (100)
Resolution (Reading Display)	480 x 272 RGB Backlight LED	480 x 272 RGB Backlight LED	480 x 272 RGB Backlight LED
Video Out	NTSC/PAL	NTSC/PAL	NTSC/PAL
Run Time (hours)	Alkaline Batteries: 6; NiMh Rechargeable Batteries: 6	3–4 hours on full charge	3–4 hours on full charge
Operating Temperature Range	32 °–140 °F (0 °–60 °C)	32 °–140 °F (0 °–60 °C)	32 °–140 °F (0 to 60 °C)
Storage Temperature	-4 °–140 °F (-20 °–60 °C)	-4 °–140 °F (-20 °–60 °C)	-4 °–140 °F (-20 to 60 °C)
Field of View, Forward	Approx. 56° diagonal	Approx. 56° diagonal	Approx. 56° diagonal
Field of View, Side	Approx. 56° diagonal	Approx. 56° diagonal	Approx. 56° diagonal
Resolution	Imager: 640 x 480	Imager: 640 x 480	Imager: 640 x 480
Optimal Focal Range	0.5"–12" (12 cm–30.5 cm)	0.5"–12" (12 cm– 30.5 cm)	0.5"–12" (12 cm–30.5 cm)
Water Resistance	Imager only when assembled: to a depth of 10' (3 m)	Imager only when assembled: to a depth of 10' (3 m)	Imager only when assembled: to a depth of 10' (3 m)

BK5600 True Digital Video Inspection Scope
- 4.3" diameter screen vs. 2.4" diameter screen of original BK5500, for even better viewing
- Digital still image capture with included SD card storage
- Includes 36" digital imager with 8.5 mm diameter head
- Uses six AA Alkaline batteries
- Touchscreen interface enables easy feature selection
- 90° glass mirror and magnet retrieval accessories included
- Includes storage tray. Keep in your tool storage drawer for security
- Two-year warranty – serviced through Snap-on® Repair Centers
- CE– DE, ES, FR, IT, GB, NL

BK6500 Video/Still Recording Digital Borescope

BK8000 Wireless Digital Videoscope
- 4.3" diameter screen
- Digital video and image capture with internal memory as well as SD card storage
- 36" Dual imager is included – see straight ahead or at a 90° angle
- Wireless 802.11n provides clear image transmission
- Rechargeable lithium batteries in both the viewer and imager
- Three mega-pixel rear-view camera allows technician to document pre-service vehicle condition
- Touchscreen interface enables easy feature selection
- USB port for mass storage
- Includes blow molded case
- Two-year warranty – serviced through *Snap-on* Repair Centers
- CE— DE, ES, FR, GB, IT and NL
- BK5500, BK5500W and BK6000 imagers are not compatible with BK8000 units

Specifications	BK8000-55	BK8000-56	BK8000-38-1	BK8000-38-2	BK5500-38-1	BK5500-38-2
Description	36" Dual View Imager (5.5 mm head)	79" Dual View Imager (5.5 mm head)	36" Forward View Imager (3.8 mm head)	36" mm Side View Imager (3.8 mm head)	36" Forward View Imager (3.8 mm head)	36" mm Side View Imager (3.8 mm head)
Power Supply	Forward View Imager: 100 mA; Side View Imager: 100 mA	Forward View Imager: 100 mA; Side View Imager: 100 mA	100 mA	100 mA	100 mA	100 mA
Width, inches (mm)	.2165 (5.5)	.2165 (5.5)	.1496 (3.8)	.1496 (3.8)	.1496 (3.8)	.1496 (3.8)
Length, inches (mm)	36 (914.4)	79 (2,006)	36 (914)	36 (914)	36 (914)	36 (914)
Operating Temperature Range	32 °–113 °F (0 °–45 °C)	32 °–113 °F (0 °–45 °C)	32 °–113 °F (0 °–45 °C)	32 °–113 °F (0 °–45 °C)	32 °–113 °F (0 °–45 °C)	32 °–113 °F (0 °–45 °C)
Storage Temperature	-4 °–158 °F (-20 °–70 °C)	-4 °–158 °F (-20 °–70 °C)	-4 °–158 °F (-20 °–70 °C)	-4 °–158 °F (-20 °–70 °C)	-4 °–158 °F (-20 °–70 °C)	-4 °–158 °F (-20 °–70 °C)
Optimal Focal Range	Forward View Imager: 1"–12" (2.5 cm–30 cm); Side View Imager: 1"–12" (2.5–30 cm)	Forward View Imager: 1"–12" (2.5 cm–30 cm); Side View Imager: 1"–12" (2.5–30 cm)	1"–12" (2.5 cm–30 cm)	1"–12" (2.5 cm–30 cm)	1"–12" (2.5 cm–30 cm)	1"–12" (2.5 cm–30 cm)
Water Resistance	Imager to a depth of 10' (3 m)	Imager to a depth of 10' (3 m)	Imager to a depth of 10' (3 m)	Imager to a depth of 10' (3 m)	Imager to a depth of 10' (3 m)	Imager to a depth of 10' (3 m)
Lighting Description	Forward View Imager: 4 mini-LEDs with custom ring light pipe; Side View Imager: single LED with custom light pipe	Forward View Imager: 4 mini-LEDs with custom ring light pipe; Side View Imager: single LED with custom light pipe	3 mini-LEDs with custom ring light pipe	2 super bright LEDs with custom light pipe	3 mini-LEDs with custom ring light pipe	2 super bright LEDs with custom light pipe
Weight, lb (kg)	0.5 (0.227)	0.75 (0.340)	0.14 (0.07)	0.14 (0.07)	0.14 (0.07)	0.14 (0.07)
Maximum Light Output	Forward View Imager: 300 Lux; Side View Imager: 2,400 Lux at 1" (open air dissipation)	Forward View Imager: 300 Lux; Side View Imager: 2,400 Lux at 1" (open air dissipation)	300 Lux at 1" (open air dissipation)	350 Lux at 1" (open air dissipation)	300 Lux at 1" (open air dissipation)	350 Lux at 1" (open air dissipation)
Maximum Bend Radius	3/4" (19.05 mm)	3/4" (19.05 mm)	3/4" (19.05 mm)	3/4" (19.05 mm)	3/4" (19.05 mm)	3/4" (19.05 mm)
Humidity	5%–100% non-condensing	5%–100% non-condensing	5%–100% non-condensing	5%–100% non-condensing	5%–100% non-condensing	5%–100% non-condensing

Two-year warranty
DE, ES, FR, IT, GB, NL and JP

BK8000-55 Dual View Imager, 5.5 mm Diameter
- 5.5 mm imagers get into much tighter spaces than standard 8.5 mm
- Dual View Digital Cameras see straight ahead or at a 90° angle
- No need for additional mirror attachment
- Close focus provides incredible detail
- Imagers are resistant to all common automotive chemicals

BK8000-56 Dual View Imager, 5.5 mm Diameter 78 3/4" in length

BK5500-38-2 Side View Imager (3.8 mm diameter)
- For use on BK5500, BK5500W and BK6000 Digital Borescopes
- Analog sensor technology provides small package size to access the smallest port sizes
- Side view imager allows the user to see the cylinder wall and valves
- Side view imager features a permanently attached mirror so it can't fall off
- 3.8 mm outside diameter fits most glow plug ports
- Imagers are resistant to all common automotive chemicals

BK8000-38-6 Cleaning Swabs

BK5500-38-1 Forward View Imager (3.8 mm diameter)
- For use on BK5500, BK5500W and BK6000 Digital Borescopes
- Analog sensor technology provides small package size to access the smallest port sizes
- Forward view Imager allows the user to see combustion cup of piston
- 3.8 mm outside diameter fits most glow plug ports
- Imagers are resistant to all common automotive chemicals

BK8000-38-1 Forward View Imager (3.8 mm diameter)
- For use on BK5600, BK6500 and BK8000 Digital Borescopes
- Digital sensor technology provides small package size to access the smallest port sizes
- Forward view Imager allows the user to see combustion cup of piston
- 3.8 mm outside diameter fits most glow plug ports
- Imagers are resistant to all common automotive chemicals

BK8000-38-2 Side View Imager (3.8 mm diameter)
- For use on BK5600, BK6500 and BK8000 Digital Borescopes
- Digital sensor technology provides small package size to access the smallest port sizes
- Side view imager allows the user to see the cylinder wall and valves
- Side view imager features a permanently attached mirror so it can't fall off
- 3.8 mm outside diameter fits most glow plug ports
- Imagers are resistant to all common automotive chemicals

⚠WARNING

- Do not use in environment with explosive vapor
- Read safety precautions on pages W1 to W4

VIDEOSCOPES

BK5500-7 BK5500-9 BK5500-10 BK5500-12 BK5500-13 BK5500-15

Stock No.	Description	Included with BK5500A	Accessory for BK5500A	Included with BK6000	Accessory for BK6000
BK5500-1	36" Imager (8.5 mm head)	•			
BK5500-2	Mirror and Magnet	•		•	
BK5500-6	Blow Molded Case		•		
BK5500-7	72" Imager (8.5 mm head)		•		•
BK5500-8	Video Out Cable	•			
BK5500-9	120" Imager (8.5 mm head)		•		•
BK5500-10	36" Blue Light / UV Imager (8.5 mm head)		•		•
BK5500-12	Dual Imager (mm head)		•		•
BK5500-13	36" View Imager (5.5 mm head)		•		•
BK5500-15†	30" Dual Imager (12.5 mm head)		•		•
BK6000-1	Battery, Li-ion			•	
BK6000-2	S-Hook			•	
BK6000-6	Blow Molded Case			•	
BK6000-10	Battery Charger			•	
BK6000-11	Earbud and Microphone				•
BK6000-12	USB Cable			•	
BK6000-13	Kick Stand			•	
–	(4) AA Batteries	•			
–	Warranty	2 years		2 years	
–	Instruction Manual	•		•	

†CE

STETHOSCOPES

YA6930

Electronic

Quickly pinpoint the source of noise or vibration in underhood, undercar and vehicle interiors.
Six selectable channels allow placement of sensors in various locations to pick up bearing, gear, engine, suspension, drive accessory and wind noises.

YA6930 Electronic Engine Stethoscope

- Electronic Stethoscope amplifies sound during diagnosis or verification of proper vehicle operation
- Use to pinpoint faulty bearings, injectors, squeaks, rattles and more
- Mode selection switch with LED indicator easily switches between the sound and vibration functions
- Noise cancellation feature eliminates background noise
- Studio style headphone set with tangle-free cord
- Detachable flex wand with LED illuminated tip
- Rotary volume control
- Lightweight and balanced with ergonomic comfort grip
- CE

YA6890KT

YA6910

YA6920

Electronic

YA6890KT Electronic Squeak and Rattle Finder (Blue-Point®)

- Quickly pinpoints source and location of noises emanating from under chassis, under hood, transmission, differential/CV joint, faulty fuel injectors and bearings, gears and suspension parts
- Helps detect and isolate squeaks, rattles, groans, cowl "pops", clunks, growls, thumps, rumbling and ticking noises
- Wireless transmitters feature magnetic body with versatile clip
- Wireless channel receiver isolates six different transmitter locations
- LED lights indicate the strength of signal of the active channel
- Illuminated button indicates active channel at a glance

YAH6890KT European Version

YA6910 Mini Electronic Stethoscope (*Blue-Point*)

- Convenient diagnostic tool can pinpoint location of noise caused by bad bearings, bushings, dirty fuel injectors, wind and air leaks, noisy valves and lifters
- Allows user to monitor gears, bearings and suspension components under load so problems can be more accurately diagnosed
- Sensor clamp helps to detect noises during vehicle test drive that cannot be duplicated in the work bay
- Sensor tip mounted on 6" flexible shaft allows access to hard-to-reach areas
- 5" inductive metal probe allows user to pinpoint source of noise or vibration
- Ultra sensitive microphone provides a full range of sound
- Features a rotary style adjustable volume control

YA6920 Electronic Marine Stethoscope (*Blue-Point*)

- Unique diagnostic listening device specifically designed to pinpoint squeaks, rattles and other troublesome noises in most marine vessels and watercraft with inboard or outboard motors
- Test for noise and harmonic vibration on bearings, under dash areas, control cables, fuel injectors, cabinets and compartments, alternators, switches, pumps, final drives, steering gears, gear cases, steering pumps, hulls and compressors
- 14' long, water resistant wire loom harness allows user to diagnose hard-to-reach problem areas
- Six spring-loaded, color-coded stainless-steel sensor clamps with built-in super sensitive microphone in the tips for optimal sound detection
- Heavy duty professional headphones block any unwanted sounds

Mechanic's

GA111D Mechanic's Stethoscope

- Locates any engine sound such as bearing noise, knocks and squeaks in fan or water pump, and valve tappets
- Sound amplifying diaphragm and a 12" probe to locate trouble

GA111D

INFRARED THERMOMETERS

CTG761

These infrared thermometers safely monitor hot, hazardous or hard to reach materials without contamination or damage to the surface. Simply point at target, pull the trigger and read the temperature on the large, backlit LCD display.

Applications:
- Pinpointing radiator core restrictions
- Checking exhaust and emission control problems
- Measuring catalytic converter temperatures
- Diagnosing exhaust manifolds for combustion problems
- Measuring tire temperatures
- Measuring race track temperatures
- Measuring bearing, rotor, drum or brake temperatures for potential problems
- HVAC – Use for temperature room balancing, check supply/return registers duct work, monitor steam traps, furnace performance plus use in energy audits
- Check bearing, rotor, brake and drum temperatures

Features	CTG761†
IR Range	-50 °–1,000 °C (-58 °–1,832 °F)
IR Resolution	< 1,000 °C/°F : 0.1 °C/°F > 1,000 °C/°F : 1 °C/°F
IR Accuracy	0 °–560 °C : ±2% or 2 °C -18 °–0 °C : 3 °C -50 °– -18 °C : 5 °C 560 °–1,000 °C : ±2% ± 3 °C
IR Repeatability (+23 Ems=0.95)	± 2% or ± 2 °C
K Type Range (Thermocouple) (Optional)	-200 °–1,300 °C
K Type Resolution (Thermocouple) (Optional)	-99 °C/°F–999 °C/°F : 0.1 °C/°F Other : 1 °C/°F
K Type Accuracy (Thermocouple) (Optional)	0.5% of Reading ± 1 °C
Response Time	500 mSec
Spectral Response	7–14um
Display Hold	Last reading and operating mode display for 10 sec nominal upon trigger release
Emissivity	0.30–0.99 Adjustable
Alarm	Alarm On/Off and High/Low
Record	Rec/Max/Min
Ambient Operating Range	0 °–50 °C (32 °–120 °F)
Relative Humidity	10%–80% RH non-condensing
Storage Temperature	-10 °–70 °C (14 °–158 °F) without battery
Distance To Spot Size	12 : 1 (90% energy covered)
Battery Type	Snap-on® Battery Pack (Lithium ion) 7.2V/14.4V
Battery Life	About 30 hrs continuous use Laser and Back Light
Tool Only	CTG761DB†

†CE

CTG761 Infrared Thermometer
- Ergonomic design features a comfort grip equally comfortable for both right- and left-handed users
- Widest temperature range of -58 °F–1,832 °F
- Most advanced features of any professional IR gun
- Single-button trigger makes it effortless to control
- Powered by 14.4V micro lithium battery and charger –Interchangeable with our new 7.2V cordless tools and eliminates the need for extra chargers and back-up batteries
- Optional contact k-type thermocouple probe, adds to the flexibility of measuring temperatures in confined spaces, including liquid temperatures
- Seven-year warranty
- Accurate to ±2% or ± 2 °C or ±3 °F, whichever is greater
- Dual laser pointer to indicate the edges of the temp circle
- High contrast large display is even visible in bright sunlight
- Adjustable emissivity from 0.3–1.00
- Record with min, max and continual scan
- CE: DE, ES, FR, IT, GB, NL, JP

CTG761DB Infrared Thermometer
- Same as CTG761 but does not include battery, charger or storage case

RTEMP8

RTEMPB3A

RTEMPB7

Features	RTEMP8†	RTEMPB3A*†	RTEMPB7*†
Temperature Range	-60 °–760 °C (-76 °–1,400 °F)	-58 °–932 °F (-20 °–500 °C)	-31 °–689 °F (-35 °–365 °C)
Temperature Display	Selectable for °F or °C	Selectable for °F or °C	Selectable for °F or °C ±5 °C (2.7 °F)
Response Time	1 second	0.5 seconds	1 second
Emissivity	Adjustable, set to 0.95	0.98	0.95 or 0.70 (0.95 default)
Power	(2) AAA Batteries	9V Alkaline or NiCad Battery	(2) AAA Batteries
Accuracy	±1.8 °F (±1 °C)	±2% of reading or ±2 °C (±4 °F)	±1.5 °C (2.7 °F)
Distance To Spot Ratio	12:1	12:1	12:1
Ambient Operating Range	0 °–50 °C (32 °–122 °F)	32 °–105 °F	0 °–50 °C (32 °–122 °F)

*(Blue-Point®)
†CE

RTEMP8 Multi-laser Infrared Thermometer
- Easy-to-read color screen
- Modes include: E, MAX, MIN, DIF, AVG, HAL and LAL
- Distance: Spot: 12:1
- Temperature range: -60 °–760 °C (-76 °–1,400 °F)
- Operating range: 0 °–50 °C (32 °–122 °F)
- Battery: AAA size (2)
- Battery life: minimum of seven hours' continuous use with laser and 30 hours continuous use without laser
- Thermometer automatically shuts off if left idle for more than 60 seconds
- Accuracy: ± 1 °C (± 1.8 °F)
- CE: DE, ES, FR, IT, GB, NL UL – JP

RTEMPB3A Infrared Thermometer *(Blue-Point)*
- Temperature range of -58 °–932 °F (-20 °–500 °C)
- Use for most automotive and industrial applications requiring an infrared thermometer
- Compact size of 5.88" x 3.62" x 1.38" (149.2 mm x 92.1 mm x 34.9 mm)
- Laser targeting accuracy
- Enhanced backlit four-digit LCD for easy viewing
- Automatic power-off after ten seconds
- Nylon holster for transport and safe storage
- Conformity

RTEMPB7 Infrared Thermometer *(Blue-Point)*
- Modes include: E, MAX, MIN, DIF and AVG
- Distance: Spot: 12:1
- Temperature range: -35 °–365 °C (-31 °–689 °F)
- Operating range: 0 °–50 °C (32 °–122 °F)
- Battery: AAA size (2)
- Battery life: typically lasts 18 hours; minimum of 14 hours (continuous use)
- CE: DE, ES, FR, IT, GB, NL UL – JP

TACHOMETERS

EEDMTACH1

EEDMRPM500

EEDMRPMD500

MT257B

Tachometers

EEDMTACH1 Digital Tachometer
- Combination contact/non-contact tachometer with Minimum (MIN), Maximum (MAX) and LAST or current reading
- Non-contact operation uses photoelectric sensor and reflective tape (included)
- Contact measurements are taken with one of three contact adaptors: cone, concave wheel or large wheel
- Current data will remain until the next reading is taken
- Memory figures will remain until the next recorded reading is taken

Ranges:
Photo Tach: 5–30,000 RPM
Contact Tach: 0.5–19,999 RPM
Surface Speed: 0.2–6,560 ft/min or 0.5–1,999 m/min

MTTACH1A1 Photo Tape
Reflective photo tape for the EEDMTACH1 Tachometer.

EEDMRPM500 Digital Tachometer (Gas Engines)
- Use to digitally read RPM on single cylinder, 2 or 4 stroke gas engines
- Choose between 2 or 4 stroke engines and 1 or 2 spark ignition systems
- Unit provides MIN/MAX readings with eight storage locations to save readings for future reference
- Range is 300–10,000 RPM
- Powered by 9V battery (included)
- Overall dimensions are 2 3/4" x 5 3/4" x 1"

EEDMRPMD500 Diesel Engine Adaptor
- Optional diesel engine adaptor for the EEDMRPM500 digital tachometer
- Use on diesel engines only
- Range is 300–6,000 RPM

Diesel Timing Meter

MT257B Diesel Pulse Adaptor (Blue-Point®)
- Test injector timing or engine RPM on diesel engines equipped with 1/4" or 6 mm external steel fuel injector lines
- Enables use with inductive pick-up timing light to test engine timing
- MT257B is not for use on diesels with common rail fuel systems

SPECIALTY METERS AND SMALL TESTERS

RELAYTEST1

Automotive Relay Tester

RELAYTEST1 Automotive Relay Tester
- Quickly and accurately test four and five terminal electromechanical relays used on many US and imported automobiles
- Will interrogate and identify an unknown relay terminal configuration then self configure its own internal circuitry to perform all required test functions automatically
- Can be used to perform the following tests: coil resistance, surge suppression device (resistor or diode), open/closed contact integrity, contact cyclic testing for intermittent failure detection, loaded contact continuity, relay contacts stuck open or closed and time to contact closure and opening
- Unit automatically indicates test results with a series of red, green and yellow performance lights

YA76562

Coil-on-Plug (COP) Probe

YA76562 Ignition Quick Probe *(Blue-Point)*
- Quickly verify the firing of a coil on plug (COP) ignition coil and spark plug
- Eliminates the need for back probing coil wires and disassembly to test at the coil connector or spark plug
- Variable sensitivity (VS) thumbwheel for greater diagnostic accuracy and expanded application coverage
- Super bright KV and ARC indicator LEDs

EETL500

EETL5568

MT125A

Timing Lights

EETL500 Digital Tach/Advance Timing Light
EETL500 timing light kit includes:
EETL500-2 Inductive Pickup Leads, 72" (6')
EETL500-PB Storage Case
EETL500-Z Instruction Manual for EETL500

Specifications

- Clearly view each flash with patented skip circuitry for tachometers readings up to 9,900 RPM – adjust engine RPM
- View, set and adjust ignition advance and retard: 0°–90° – set base timing, overall advance and view ignition retard
- Measure and adjust ignition dwell: 0°–180°/1–12 cylinders – points ignitions
- Measure battery and charging voltage: 10–16V – with quick references LEDs
- Set ignition timing: works on DIS, conventional and most aftermarket ignition systems without solid core wires
- Measure engine RPM and Ignition advance: also measure dwell on older points type ignition systems
- Check battery voltage: provides a quick visual indication of the current state of the battery
- Measure and Display kV Readings – view individual cylinder firing voltage, perform snap throttle and coil stress tests
- Patented Pivoting Head – with xenon strobe and dual LED flashlight makes it easy to get into tight spots and see
- Large blue backlit graphic LCD screen – clearly view the displayed information
- Timing on both two and four cycle (DIS and conventional) engines, 1–12 cylinders – no adaptors required
- Replaceable heavy duty test leads
- Bright high intensity flash
- Nostalgic look with diamond plate chrome underside
- Comes with a hard case for storage and protection
- Full two-year warranty
- Patents #D377,622, #4,594,886 and #5,767,681 apply

EETL5568 Digital Timing Light (Blue-Point®)

- Multi function timing light works on all distributorless and conventional ignition systems
- Patented skip circuitry tests tachometer readings up to 9,900 RPM
- View, set and adjust ignition advance and retard: 0°–90°
- Measure and adjust ignition dwell: 0°–180°/ 2–12 cylinders
- Measure battery and charging voltage: 10–16V
- Dual display backlit screen allows clear viewing of tachometer and ignition advance reading
- Pivoting barrel allows easy access and a clear view to ignition timing marks
- One-hand operation with protective hand guard for comfort and safety
- Clearly view each flash at all RPM's with patented skip circuitry
- Serviceable 72" (6') heavy duty leads and metal inductive pickup
- Shock resistance rubber boots for added durability
- Bright high intensity flash
- Includes EETL5568-PB storage case

MT125A Self-Powered Timing Light *(Blue-Point)*

- Self powered timing light features a single 6' inductive pickup
- Quick attachment to spark plug wires on motorcycles, marine motors, snowmobiles, jet skis, small engines and other equipment that do not have easy access to a battery power source
- Can be used for automotive applications as well
- On/Off switch is located within thumb reach

TECHNICAL SUPPORT: 1-877-447-6276

COMPUTER

EECS5MEM

YA960

YA961

TLM12AO

Computer Memory Savers

EECS5MEM OBDII Memory Cord, 5'
- Use in conjunction with a jump starter to preserve vehicle codes and electronic presets while a vehicle's battery is disconnected
- Turns any jump starter with a 12V power port into a memory saver
- Interface connector between a jump starter and a vehicle's OBD-II port
- Prevents electronic memory loss when disconnecting a vehicle's battery
- LED confirms a proper connection has been made to OBD-II port
- Do not plug cables 12V DC into the vehicles 12V DC port

YA960 Computer Memory Saver
- Prevents memory loss on digital radios, clocks, door locks, and computers when disconnecting vehicle battery
- Plugs into cigarette lighter socket
- Uses a 9V battery to keep "memories" alive for up to four continuous hours
- Use YA961 on Chrysler® products

YA961 Computer Memory Saver
- Similar in function to YA960 except its power source is any 120V AC outlet

TLM12AO Computer Memory Saver
- Saves computer memory on clocks, radio settings and fuel injection systems
- Simply plug into 12V accessory, then attach battery clamps to spare battery

YAGM1

Service Light/Airbag Resetting Tools

YAGM1 Air Bag Release Tool
- Tool will quickly and easily release the retention springs for the removal of the SIR module on certain late model GM® vehicles

Applications: Cadillac®, Buick® Park Avenue, Pontiac® Grand Am®, minivans and trucks

ELECTRICAL

FZ4B

FZ7A

YA9811

Fuse Tools

FZ4B Fuse Tongs
- Delrin® tongs pull fuses up to 15/16" in diameter
- 1/8" hook on the handle pulls short fuses
- Tongs have high insulating qualities and are resistant to oil, water and heat up to 300 °F
- Hand stops prevent slipping

FZ7A Fuse Tongs
- Nylon tongs remove auto high tension wires and pull cartridge fuses from 15/16"–1" in diameter
- Hooks on handles and jaws
- Tongs have high insulating qualities and are resistant to oil, water and heat up to 300 °F
- Hand stops prevent slipping

YA9811 Relay/Fuse Pliers
- Remove/install relays and fusible links
- Designed to reach into confined access areas
- Slip joint design to enable use for a variety of sizes
- Coated pliers tip securely grips corner of relay or fusible link
- Black industrial finish with red cushioned grip handles
- 8" in length

GMSTB25

Multifunction Switch Tools

GMSTB25 Multifunction Switch Tool for *GM* vehicles
- Reduces the time it takes to replace the multifunction switch (turn signal/dimmer/windshield wiper switch) without removing the air bag, steering wheel and clock spring
- Includes a low-profile 1/4" magnetic bit wrench with a T25 Ball TORX® bit that allows better control and access in restricted areas
- Reversible ratcheting action
- Heat treated for strength and durability
- Chrome plated for great appearance and wear resistance

GA500A



YA500GM



YA500F

TT600

TT12KT

Terminal Tools

YA13120 Electrical Connector Separator
Disconnect electrical connectors without damage. Double ended to fit different access angles. Simply engage the tool tip behind the connector clip and push or pull to disconnect. Works on weather pack and other automotive electrical connectors.

GA500A Wire Terminal Tool
- Prongs depress the "barbs" on conventional terminals

YA500GM Wire Terminal Tool
- Designed for use for Pack-Con and Weather-Pack terminals on GM® C3 systems

YA500F Terminal Tool for Ford® Vehicles
- Use on *Ford* terminals

TT3KT Terminal Tool Set
- Comprehensive set covers the majority of today's popular terminals
- Includes: GA500A, YA500GM, YA500F and TT3-1 handle that slips over probes to protect technician's hands and provides extra leverage

TT600 Terminal Tool Kit
Includes six tools for removing terminals from harness blocks: pin vise, square probe, wedge probe, tube probe, flat probe and hook probe. Tools come in a vinyl pouch.

TT12KT C3/Wire Terminal Tool Kit for *GM* vehicles (Blue-Point®)
Applications include most *GM* and other US computer connectors and terminals. Individual handles for easy access in tight places. Designed for Weather Pack and Pack-Con terminals with flat blade to open connectors and fork for ALDL connectors to access trouble codes. Color coded: Red handle for *GM* and Green for wire terminal tools. Includes molded storage case.

Kit includes these *GM* C3 System terminal tools
TT1201 3.3 mm x 28 mm terminal tool
TT1202 1.4 mm x 28 mm square terminal tool
TT1203 1.5 mm x 24.75 mm flat terminal tool
TT1204 2.0 mm x 22 mm flat terminal tool
TT1205 8.0 mm x 24 mm fork terminal tool
TT1206 3/16" x 1.0" flat screwdriver
TT1207 3.3 mm x 28 mm tube terminal tool
TT1208 4.3 mm x 13 mm tube terminal tool
TT1209 3.75 mm x 13 mm tube terminal tool
TT1210 3 mm x 13 mm tube terminal
TT1211 3 mm flat 2-blade terminal tool
TT1212 1.6 mm flat 2-blade terminal tool
TT1213 blow molded case

Soft Grip Terminal Tools

Easily remove terminals from electrical connectors found on mid-1990s and later US and import vehicles. Terminal tools incorporate a stainless-steel design with ergonomic "soft grip" handles.

SGTT1A Soft Grip Terminal Tool
Use on PCM and transmission harnesses found on Chrysler®, Hyundai®, Kia® and Mitsubishi® vehicles. 4 13/16" long.

SGTT2A Soft Grip Terminal Tool
Provides robust narrow width blade with fulcrum for easier access to release tabs found on newer terminal blocks. General purpose release tool for US and import vehicles. 5 1/8" long.

SGTT3A Soft Grip Terminal Tool
Use on underhood sensors such as coolant temperature and throttle position sensors. For use on *Ford*, *GM* (including Cadillac®), *Chrysler*, *Mitsubishi* and *Hyundai* vehicles. 4 13/16" long.

SGTT4A Soft Grip Terminal Tool
Use for cutting open wire harnesses for easy access to troubleshooting and replacement applications. Easily slits harness sheathing without piercing the wires inside. 4 3/8" long.

SGTT5A Soft Grip Terminal Tool
Use on 55 pin ABS ECUs found on *Ford*, *GM*, Jaguar®, Jeep®, Volvo®, VW®, BMW®, *Hyundai*, *Kia* and Mercedes® vehicles. 4 13/16" long.

SGTT6A Soft Grip Terminal Tool
Use on 35 pin ABS ECUs found on Audi®, *BMW*, *Chrysler*, *Ford*, *GM*, Infiniti®, Isuzu®, *Jaguar*, Mazda®, *Mercedes*, *Mitsubishi*, Nissan®, Porsche®, Subaru®, Saab®, *Volvo* and *VW* vehicles. 4 13/16" long.

SGTT7 Soft Grip Terminal Tool
Applications: Powertrain Control Modules (PCM) on Acura®, *Audi*, *Chrysler*, *Ford*, *Hyundai*, *Jaguar*, *Kia*, *Mercedes*, *Mazda*, Toyota® and *Volkswagen* vehicles. 4 27/32" long.

SGTT8 Soft Grip Terminal Tool
Applications: Powertrain Control Modules (PCM) on *Acura*, *Audi*, Buick®, *Chrysler*, *Ford*, *GM*, *Honda*, *Jaguar*, *Mercedes*, *Mazda*, *Toyota* and *Volkswagen* vehicles. 4 27/32" long.

SGTT110

SGTT9 Soft Grip Terminal Tool
Applications: Powertrain Control Modules (PCM) on *Acura*, *Audi*, *Chrysler*, *Jaguar*, *Hyundai*, *Kia*, *Mercedes*, *Toyota* and *Volkswagen* vehicles. 4 27/32" long.

SGTT10 Soft Grip Terminal Tool
Applications: Open connector clips and sides of clips on *Acura*, *Audi*, *Chrysler*, *Honda*, *Mercedes* and *Volkswagen*. 4 27/32" long.

SGTT106A Soft Grip Terminal Tool Set
Includes SGTT1A–SGTT6A (6pc) in storage tray.

SGTT110 Soft Grip Terminal Tool Set
Includes SGTT1A–SGTT10 (10pc) in storage tray.

⚠WARNING

- Plastic coated handle does not protect against electric shock
- Read safety precautions on pages W1 to W4

FUEL & ENGINE SYSTEMS: COMPRESSION GAUGE SETS AND ADAPTORS

EEPV500

EEPV503

EEPV600

Compression Gauge Sets

- Intended for use on spark ignited gasoline engines that do not exceed 300 PSI compression
- Use hose-style EEPV5 series or steel shank EEPV6 series adaptors that thread into the spark plug hole and connect at the gauge hose's quick coupler
- Maintains highest compression test reading and resets to zero with a push button release valve
- Gauge displays individual cylinder pressure
- Test range: 0–300 PSI (0–2,000 kPa) in 10 PSI (50 kPa) increments
- Detect piston ring, intake/exhaust valve, head gasket or other engine issues

CE: DE, ES, FR, IT, GB, NL

EEPV500 Compression Gauge Set

- Test cars and trucks with hard-to-access spark plug ports
- Gauge assembly includes 2 3/4" diameter gauge and 27" flexible hose with quick coupler
- Includes EEPV5G12L, EEPV5G14L and EEPV5G14S

EEPV503 Motorcycle Compression Gauge Set

- Test motorcycles and recreational vehicles with hard-to-access spark plug ports
- Gauge assembly includes 2 3/4" diameter gauge and 18" flexible hose with quick coupler
- Includes EEPV5G10L, EEPV5G12L and EEPV5G14L

EEPV600 Compression Gauge Set

- Simplifies compression testing on engines with deep spark plug wells
- Knurled end allows hand tightening to aid against over-torqueing or cross-threading
- Gauge can be connected to the included hose assembly for extra reach
- Heat-treated and chrome-plated for longer life
- 300 PSI (2100 kPa) superior accuracy gauge with pressure release button
- Detect piston ring, intake/exhaust valve, head gasket or other engine issues
- Includes: EEPV6G12L and EEPV6G14L

MT27D

Cone-Type Compression Gauge

MT27D Cone-Type Compression Gauge

- Range from 0–300 PSI, 0–2,100 kPa
- Cone seal is held firmly over plug hole, unit does not thread in
- Ideal for small gasoline engines, motorcycles, ATVs and snowmobiles

EEPV5G10L

EEPV5G14L

EEPV5G18S

EEPV5G10S

EEPV5G14S

EEPV5G16T

EEPV5G12L

EEPV5G12T

EEPV6G3PK

Compression Gauge Adaptors

- 10 1/4" overall length unless otherwise noted
- Standard reach applies to flat and tapered spark plug hole seats; long reach applies to servicing motorcycle engines

EEPV5G10L Compression Gauge Adaptor
- Long reach (M10 x 1.0 pitch)
- Thread length .70"

EEPV5G14L Compression Gauge Adaptor
- Long reach (M14 x 1.25 pitch)
- Thread length .73"

EEPV5G18S Compression Gauge Adaptor
- Standard reach (M18 x 1.5 pitch)
- Thread length .44"

EEPV5G10S Compression Gauge Adaptor
- Standard reach (M10 x 1.0 pitch)
- Thread length .43"

EEPV5G14S Compression Gauge Adaptor
- Standard reach (M14 x 1.25 pitch)
- Thread length .36"

EEPV5G16T Compression Gauge Adaptor
- Long reach (M16 x 1.5 pitch) for Ford® 5.4 L Triton® engines
- 18" length

EEPV5G12L Compression Gauge Adaptor
- Long reach (M12 x 1.25 pitch)
- Thread length .68"

EEPV5G12T Compression Gauge Adaptor
- Main application 2nd generation *Ford Triton* engines 2008 and later
- Tests cylinder compression up to 300 PSI
- Additional applications include: Mercedes® (most V6 and some V8 models newer than 2006), Nissan® (2.0 L 2007 and later) plus Toyota® Scion® (1.8 L 2008 and later) vehicles
- 18" length
- Thread length .71 inch

EEPV6G12L Long Reach Chrome Adaptor
- M12 x 1.25

EEPV6G14L Long Reach Chrome Adapter
- M14 x 1.25

EEPV6G14S Standard Reach Chrome Adapter
- M14 x 1.25

EEPV6G3PK Adaptor Set
- Set includes EEPV6G12L, EEPV6G14L and EEPV6G14S (3pcs)

DIESEL COMPRESSION

EEPD500 Diesel Compression Gauge
- Dial reads from 9–800 PSI and from 0–5,500 kPa
- Gauge includes 18" hose with release valve

EEPD500

TECHNICAL SUPPORT 855-779-8880

⚠WARNING
- Do not expose gasoline or fuel to flames, sparks or other sources of ignition
- Use only in well ventilated area
- Read safety precautions on pages W1 to W4

FUEL & ENGINE SYSTEMS: DIESEL COMPRESSION

EEPV313C

M3540C

M3543C

M3542C

M3571C

M3572C

M3574

M3584

M3585

Compression Adaptors – Injector Style

EEPV313C Diesel Compression Gauge Adaptor
- For 1998–2007 Dodge® 24 valve 5.9 L Cummins® plus 5.9 L and *Cummins* ISB and ISBE diesel engines plus the 2007 newer 6.7 L

M3540C Compression Adaptor
- For *Cummins* 855 cu in NH and 903 V8 and L10 diesel engines

M3543C Diesel Compression Gauge Adaptor
- For Detroit® 53, 71, 92 and 8.2 L diesels

M3542C Diesel Compression Gauge Adaptor
- For Volkswagen®, Mercedes-Benz®, Volvo® and Audi® 5000 diesel engines M24 x 2.0

M3571C Diesel Compression Gauge Adaptor
- For 21 mm injectors and Bosch® type injectors on the following diesel engines: Allis® Chalmers® 433, 649, and 670, *Allis*/Fiat® 3 cylinder, John Deere® 404, 466, 531 and 619, Navistar® 361 and 407, Perkins® 4.203, 4.236, 4.248, 6.354, and 8.540, Wisconsin Engine® 340, 350, 430, 660, 670, 750, 860 and 1000, White Engine® D2000, D2300, D3000, D3400, and D4800, Mack® 673, 674, 675, 864, 865 and 866, Waukesha® diesel engines, Ford® Tractor diesel engines, Scania® DN11 and DS11

M3572C Diesel Compression Gauge Adaptor
- For pencil type injectors on the following: Caterpillar® 3208 and 1100 Series, Case® 70 Series, 188 and 207, *John Deere* early 300, 400 and 500 Series, 276, 404 and 531 diesel engines

M3574 Diesel Compression Gauge Adaptor
- For 17 mm injectors on *Navistar* DT466 and 9L, 312, 360, 414, 436 and 446 diesel engines

M3584 Compression Adaptor
- For *Case*/*Cummins* series "B" 2.9 L, 3.9 L and 5.9 L diesel engines

M3585 Compression Adaptor
- For *Case/Cummins* series "C" 8.3 L engines

EEPV312D

EEPV314C

EEPV317C

M3545B

M3569A

M3570A

M3564C

M3565C

M3566C

M3576C

Compression Adaptors – Glow Plug Style

- All "M" series glow plug style adaptors plus the EEPV312A adaptor require the use of either the M3569 or M3570 quick coupler
- EEPV314A, EEPV315A and EEPV317A couple directly to the EEPD500



Glow Plug Style

EEPV312D Glow Plug Compression Adaptor
- For Duramax® and Isuzu® diesel engines up to the 2005 model year only

EEPV314C Glow Plug Compression Adaptor
- For *Ford*/*Navistar* 7.3 L Power Stroke® diesel engines

EEPV317C Glow Plug Compression Adaptor
- For *Ford Power Stroke* 6.0 L and *Navistar*/International® 6.0 L VT365E engines with 14M x 1.25 glow plug size

EEPV318 Glow Plug Compression Adaptor
- For *Power Stroke* engines with M8 x 1.0 glow plug size

M3545B Glow Plug Compression Adaptor
- For GM® 4.3 L and 5.7 L plus *Navistar* 6.9 L and 7.3 L diesel engines
- Replacement valve core is M3545A4
- Must be used in conjunctioth MT33C Compression Gauge and M3569 or M3570 Quick Couplers

M3569A Quick Coupler
45° offset

M3570A Quick Coupler
90° offset

M3564C Glow Plug Compression Adaptor
- For *GM* 6.2 L and 6.5 L diesel engines

M3565C Glow Plug Compression Adaptor
- For *Isuzu* 1·8 L and 2.2 L diesel engines and Toyota® 1.8 L diesel engine

M3566C Glow Plug Compression Adaptor
- For *Toyota* and Nissan® 2.2 L diesel engines, plus Mitsubishi® 2 and 3 cylinder engines

M3576C Glow Plug Compression Adaptor
- For BMW® 2.4 L engines used in 1984 and 1985 Lincoln®, Mark VII and Continental models; Peugot® 1978–1984, 2.0 L and 2.3 L engines; VW®, Audi®, and *Volvo* 1.5 L, 1.6 L, 2.0 L and 2.6 L engines

Adaptors

Stock No.	Thread	A inch (mm)	B inch (mm)	C inch (mm)	D inch (mm)	E (Hex)
EEPV312D	M10 x 1.25	4.12 (104.65)	3.00 (76.20)	2.50 (63.50)	.320 (8.13)	12 mm
EEPV314C	M10 x 1.0	3.33 (84.58)	2.78 (70.61)	2.31 (58.67)	.315 (8.00)	10 mm
EEPV317C	M14 x 1.25	1.2"	.625"	0.25"	.318"	5/8"
EEPV318	M8 x 1.00	1.3"	0.744"	310"	.212"	7/16"
7M3545B	M10 x 1.0	1.78 (45.20)	1.06 (26.92)	.38 (9.65)	.385 (9.77)	3/8"
M3564C	M10 x 1.0	2.46 (62.48)	.79 (20.00)	.25 (6.35)	.325 (8.25)	3/8"
M3565C	M10 x 1.0	2.50 (63.50)	1.61 (26.92)	.866 (21.99)	.320 (8.13)	12 mm
M3566C	M10 x 1.25	1.96 (49.78)	1.27 (32.26)	.39 (9.14)	.315 (8.00)	12 mm
M3576C	M12 x 1.25	1.77 (44.95)	1.08 (27.43)	.300 (7.62)	.305 (7.75)	12 mm

EEPV509

EEPV509 Cylinder Leakage Tester

- Use on all US and import engines
- Input pressure gauge displays input air pressure for proper cylinder leakage test setup and accurate results
- Pressure gauge range is 0–100 PSI (0–700 kPa) in 2 PSI (20 kPa) increments
- Cylinder leakage gauge displays leakage as a percentage of input pressure with three distinctive zones of high, moderate and low

EEPV511

EEPV511 Vacuum Pressure Gauge Set

- Use for almost all basic vacuum pressure testing needs in the shop
- Perform engine vacuum tests on gasoline engines as well as exhaust back pressure tests on applications with an oxygen sensor
- Test vacuum accessories and emission control devices such as EGR valves canister purge systems, air switching and divert valves, vacuum delay and check valves, heater and A/C controls and cruise control systems
- Multicolor gauge face with scales of inch, Hg, PSI, negative kPa and positive kPa

EEPV508

EEPV507

Stock No.	Description	EEPV508	EEPV507
	Set Contains:		
EEPV5F-1	2" Pipe Nipple	•	•
EEPV5F-2	1/4" M x 1/8" F Hex Bushing	•	•
EEPV5F-3	3/8" M x 1/8" F Hex Bushing	•	•
EEPV5F-4	1/8" FNPT Coupling	•	•
EEPV5F-5	1/8" M x 1/8" F Street Elbow	•	•
EEPV5F-6	1/8-28 BSPT	•	•
EEPV5F-7	M10 x 1.0 Tapered Thread	•	•
EEPV5F-8	M10 x 1.0 Adaptor	•	•
EEPV5F-9	M10 x 1.25 Adaptor	•	•
EEPV5F-10	M12 x 1.5 Adaptor	•	•
EEPV5F-11	M12 x 1.75 Adaptor	•	•
EEPV5F-12	M14 x 1.5 Adaptor	•	•
EEPV5F-13	M16 x 1.5 Adaptor	•	•
EEPV5F-14	M18 x 1.5 Adaptor	•	•
EEPV5F-15	5/16"-24 Adaptor	•	•
EEPV5F-16	7/16"-20 Adaptor	•	•
EEPV5F-17	1/16"-27 Adaptor	•	
EEPV5F-18	M8 x 1.0 Tapered Thread	•	
EEPV5F-19	M8 x 1.0 Adaptor	•	
EEPV5F-20	M8 x 1.25 Adaptor	•	
EEPV5F-0	Male Quick Connect Plug	•	•
EEPV5-100G	Pressure Gauge and Boot Assembly (100 PSI)	•	•
EEPV5-BOOT1	Gauge Boot	•	•
EEPV5-500G	Gauge and Boot (500 PSI)	•	
EEPV5-BOOT2	Gauge Boot (500 PSI)		

EEPV508 Automatic Transmission Pressure Gauge Set

- Use on all major manufacturer US and import vehicles
- Includes: two gauge assemblies for high and low pressure ranges, nine adaptors to test a wide variety of US and import automatic transmissions, comprehensive instruction manual with applications table and storage case
- Four special fittings are also included for connection to hard-to-reach test ports in areas requiring a 45° or 90° angle
- High pressure gauge assembly includes 3.5" diameter gauge and 10' flexible hose with fluid coupler
- Low pressure gauge assembly includes 2.5" diameter gauge and 6' flexible hose with fluid coupler

EEPV507 Oil Pressure Gauge Set

- Use on diesel and gasoline engines
- Includes standard and metric adaptors for most US and import cars, trucks, tractors and stationary engines
- Includes: 0–100 PSI (0–700 kPa) gauge assembly

⚠WARNING

- Do not expose gasoline or fuel to flames, sparks or other sources of ignition
- Use only in well ventilated area
- Read safety precautions on pages W1 to W4

FUEL & ENGINE SYSTEMS: VACUUM PUMPS & TESTERS

YA4000B

YA4000B Automotive Test Kit

- Produces vacuum or pressure at the turn of a switch
- Comfortable ergonomic design
- One-finger trigger vacuum/pressure release
- Durable, accurate diaphragm type pressure/vacuum gauge
- Handheld vacuum/pressure pump with 2" compound gauge and rubber boot
- 12 oz fluid reservoir bottle with fluid transfer and storage lids plus fluid pickup tube
- Six tapered adaptors for connecting to tubing from .09"–.50" ID
- Two tapered manifold plugs
- Two universal bleed screw adaptors
- 12 vacuum cap plugs, vacuum line T-adaptor
- Two 1/4" ID x 24" long connection tubes with quick change connector
- 5/32" ID x 1/4" ID tubing adaptor
- 5/32" ID x 3" long vacuum test tube
- Rubber cupped adaptor
- Master cylinder refill kit

Applications:
Vacuum and pressure related engine performance diagnostics and tune-ups; brake bleeding; fluid transfer, evacuation and sampling.

FUEL INJECTION

EEFI500

EEFI500CORE

EEFI50030

EEFI500 Series Adaptor Sets

Stock No.	Includes:	EEFI500	EEFI500CORE	EEFI500ADD
EEFI5001	Gauge and hose assembly with bleed-off valve	•	•	
EEFI5002	Standard schrader hose assembly (Chrysler®, GM®, M-B®, Porsche®, Saab® and Saturn® vehicles)	•	•	
EEFI5003	Small schrader hose assembly (BMW®, Ford®, Jaguar®, Kia®, Lincoln®, Mazda®, Mercury®, Mini®, Volvo® and VW® vehicles)	•	•	
EEFI5004	Standard schrader right angle adaptor (*Chrysler, GM, M-B, Porsche, Saab* and *Saturn*)	•	•	
EEFI5005	Small schrader right angle adaptor (*BMW, Ford, Jaguar, Kia, Lincoln, Mazda, Mercury, Mini, VW* and *Volvo* vehicles)	•	•	
EEFI5006	Tee adaptor with 1/4", 5/16" and 3/8" diameter hoses and clamps (*Chrysler,* Infiniti®, Isuzu®, *Mazda*, Nissan®, Subaru® and Suzuki® vehicles)	•	•	
EEFI5006-1	Replacement hoses and clamps	•	•	
EEFI5007	Spare parts service kit for EEFI5001–EEFI5006	•	•	
EEFI5008	Tee Hose Assembly – 3/8" Quick Connect	•		•
EEFI5009	3/8" Quick Connect Double Male – *GM* vehicles	•		•
EEFI50010	5/8" Spring Lock Male – *Ford, Mazda* vehicles	•		•
EEFI50011	5/8" Spring Lock Female – *Ford, Mazda* vehicles	•		•
EEFI50012	5/16" Quick Connect Male – *Acura, Chrysler, Ford, Mazda,* Toyota® vehicles	•		•
EEFI50013	5/16" Quick Connect Female – *Acura, Chrysler, Ford, Mazda, Toyota* vehicles	•		•
EEFI50014	5/16" Male Hose Adaptor – *BMW, Chrysler, Infiniti, Nissan, VW* vehicles	•		•
EEFI50015	5/16" Hose Adaptor – *BMW, Chrysler, Infiniti, Nissan, VW* vehicles	•		•
EEFI50016	M14 x 1.5 Inverted Flare Male – *Geo, Infiniti, Toyota* vehicles	•		•
EEFI50017	M14 x 1.5 Inverted Flare Female – *Geo, Infiniti, Toyota* vehicles	•		•
EEFI50018	M14 x 1.5 Ball Seat Female – Audi®, Hyundai®, *Jaguar*, Land Rover®, *Porsche, Volvo, VW* vehicles	•		•
EEFI50019	M14 x 1.5 Ball Seat Male – *Audi, Hyundai, Jaguar, Land Rover, Porsche, Volvo, VW* vehicles	•		•
EEFI50020	16 mm O-Ring Adaptor – *Hyundai, Mitsubishi* vehicles	•		•
EEFI50021	11 mm O-Ring Adaptor – *Infiniti, Kia, Mitsubishi, Nissan* vehicles	•		•
EEFI50022	M12 x 1.0 Pulse Dampener Adaptor – *Acura, Honda* vehicles	•		•
EEFI50023	M12 x 1.5 Banjo Bolt Adaptor – *Audi, Porsche, Saab* vehicles	•		•
EEFI50024	M12 x 1.25 Banjo Bolt Adaptor – *Honda, Hyundai, Isuzu, Lexus, Toyota* vehicles	•		•
EEFI50025	M6 x 1.0 Filter Adaptor – *Acura, Honda* vehicles	•		•
EEFI50026	Spare part service kit for 5009–50025 adaptors	•		•

EEFI500 Master Fuel Injection Pressure Gauge Set

- Tests fuel injection pressure on major US, European and Asian model multiport fuel systems
- Convenient label shows image of components, part numbers and applications for quick and easy identification and storage
- Fully detailed user manual includes test connection illustrations and application charts
- Set contains tee manifold with shutoff valve, 3 1/2" diameter gauge assembly with a blow down valve and the adaptors needed to test most fuel injection systems
- Blow molded case with special removable lid allows for convenient storage in 4" deep drawer and easy access to components
- Pressure gauge rating of 0–100 PSI

EEFI500CORE Core Fuel Injection Pressure Gauge Set

- For basic fuel injection pressure service needs
- Individual components or the EEFI500ADD set can be purchased to build up to master set

EEFI50030 Universal Fuel Pressure Adaptor

- Allows owners of MT337, EEFI301 and EEFI307 series fuel pressure gauges to increase applications by using components from the EEFI500 master fuel injection pressure set

EEDF500

EEDF501

EEDF502

Fuel Pressure Testers

EEDF500 Fuel Pressure Test Set
- Designed for testing diesel fuel pressure and vacuum on GM® 6.6 L Duramax® engines
- Gauge assembly includes a compound gauge with a 0–15 PSI (0–100 kPa) pressure plus 0–30 in Hg vacuum scale and a protective rubber boot
- Long 6' flexible hose with quick coupler for fast and easy connection to the engine
- Convenient protective storage and carrying in a slide lid case that fits easily into a 4" drawer

EEDF501 Fuel Pressure Test Set
- Designed for diesel fuel pressure and restriction testing on engines with Compucheck test ports
- 3 1/2" compound gauge has a 0–15 PSI (0–100 kPa) pressure and 0–30 inHg vacuum scale
- 2 1/2" pressure gauge has a 0–300 PSI (0–2,000 kPa) scale in 10 PSI (50 kPa) increments
- Includes female Compucheck quick coupler with 6' hose, pressure bleed off, and quick connect for easy interchange of the two gauges
- Includes separate male Compucheck test port for installation in vehicles without Compucheck test ports
- Convenient protective storage and carrying in a slide lid case that fits easily into a 4" drawer

EEDF502 Fuel Pressure Test Set
- Developed with input from technicians on adaptor selection for 7.3 L, 6.7 L, 6.4 L and 6.0 L Ford® Power Stroke® engines
- 0–100 PSI gauge and hose assembly
- Low-pressure diesel-fuel delivery testing (lift pump)
- Correct fuel delivery and dynamic fuel pressure are crucial to having a properly running engine
- Helps prevent a lean condition that may cause burning of injectors or scorched cylinders
- Convenient protective slide-lid case that will fit in a 4" drawer for easy tool access

General Purpose Fuel System Cleaners

EEFI5CLEANER Fuel Injection System Cleaner
- Cleans deposits from fuel injectors, fuel rail and intake valves to restore engine performance, lower emissions and smooth idle
- Canister style cleaner accepts preferred or required fuel injection system cleaner (sold separately)
- Check vehicle fuel pressure with right-hand gauge and easily set cleaning pressure with the left-hand gauge
- Stainless-steel braided Teflon® hose resists solvents
- Conveniently hangs under hood with center chain
- Compatible with EEFI500 series adapters (sold separately)
- See user manual for vehicle make details

EEFI5CLEANER

TECHNICAL SUPPORT 1-885-779-8880
This phone number does not apply to the YA4000B shown on page 542.

⚠WARNING

- Do not expose gasoline or fuel to flames or other sources of ignition
- Use only in well ventilated area
- Read safety precautions on pages W1 to W4

FUEL & ENGINE SYSTEMS: FUEL INJECTION

FIH500

YA76462

IPK1180

A227

Specialty Service Tools

FIH500 Fuel Module Disconnect Tool
- GM® fuel module disconnect tool for 1998 and later *GM* full-size pickups, Suburban® and Tahoe® vehicles
- Two-piece design permits easy access to the connectors
- Fits both 3/8" and 5/16" connector sizes
- Tool segments can be clipped together for convenient storage

YA76462 Universal EFI Quick Probe (Blue-Point®)
- Quickly detects electronic fuel injector functions on any gas or diesel engine
- Specifically designed to detect vibrations emitted when electronic injector fires
- No hunting for injector wires to test at connector
- No need to remove injector for testing
- Includes: bright LED strobe, 7" removable probe tip, user guide, battery operation and sensitivity thumb wheel

IPK1180 Fuel Injector Puller
- Developed to allow easy removal of injectors on all BMW® vehicles with direct injection
- Compact size allows for easy attachment and removal of the hard-to-reach injectors of the twin turbo V8 (N63) engine, reducing service time
- Easy to install on inline 6 and V8 (N63) engines, simply screw the tool on to the top of the injector, then with one or two taps with the slider, the injector will come out easily

A227 Fuel Pressure Sensor Socket, 27 mm
- For removing and installing fuel pressure sensors from fuel injection fuel rails under the intake
- Manufactured from special alloy steel, precision forged and heat treated for optimum strength and durability
- Snap-on® sockets using the Flank Drive® wrenching system grip fasteners on the flanks/flats increasing torque by 15%–20%; prevents fastener from rounding and increases the life of the socket
- Socket has an enlarged bolt clearance to fit over the sensor connector where a regular 27 mm socket will not work
- Overall length of socket is 2"

YA997

FLR630

FIH940

Fuel Inlet and Fuel Filter Tool

YA997 Swivel Handle Fuel Filter Wrench
- Designed to access hard-to-reach fuel filters
- Fits fuel filters 2 1/4"–2 9/16"

FLR630 Fuel-Tank Lock-Ring Tool
- Remove/install plastic fuel tank lock rings without damage
- Channel design on body allows legs to adjust from 4"–7 1/2" while keeping drive centered
- Compact design prevents the tool from hanging over the work area and hitting other parts
- For newer, smaller *GM* vehicles and vehicles with traditional size rings

Fuel Pump Tools

FIH940 Gas Tank Fuel Pump Removal Tool
- Removes plastic fuel pump retaining rings
- Universal adjustable design fits most plastic retaining rings
- Prevents damage to original pump retaining ring
- Use with 1/2" drive extension and ratchet
- Use to reinstall old retaining ring

FID8838A

Injector Harness Testers

FID8838A Injector Harness Tester Set
- Plugs into solenoid harness to identify electrical or fuel system malfunctions
- Includes eight testers and injector harness extension in a storage case

FID8320 Injector Harness Tester
- Use on GM® TBI models 100, 200, 220, 300, 400 and 500 used on various cars and trucks

FID8329 Injector Harness Tester
- Use on Bosch® PFI injectors used on various *GM*, Ford® and Chrysler® vehicles with PFI

FID8339 Injector Harness Tester
- Use on *GM M*ultec® 1 injectors and the "bottom feed" injectors used on 2.2 L 4 cyl. "J" and "L" cars from 1989–1993

FID8340 Injector Harness Tester
- Use on *GM* SCPI truck engines 4.3 L V6, 5.0 L V8, and 5.7 L V8 (1996 and later) plus 4.8 L V8, 5.3 L V8, and 6.0 L V8 (1999 and later)

FID9210 Injector Harness Tester
- Designed for Geo® TBI systems (1992 and later)

FID8838A1
- Use on *GM Multec* 2 injectors found in 1999 and later 2.4 L 4 cylinder engines in Oldsmobile® Intrigue and Cutlass, Chevrolet® Cavalier and Malibu® and Pontiac® Sunfire® vehicles

FID8838A2 Injector Harness Tester
- Use on *Bosch* 2 injectors used in 2000 and later Cadillac® 4.6 L V8 engines and *Oldsmobile* 4.0 L V8 engines

FID8838A3 Injector Harness Extension
- Injector harness extension line for all FID series injector harness testers
- Use when injector is in a lower position in manifold or cylinder head

FID8838A4 Plastic Case
- Storage case for the FID8838A injector harness tester set

YA965A



YA2850A

HCP6A

HCP7A

HCP10A

SHP2KT

YA965A Hose Pinching Pliers
- Eliminates need to drain cooling system when repairing thermostat or water pump
- Use to pinch off emission control hoses, flexible brake lines and rubber hose fuel lines
- Jaws swivel for positive clamping

YA2850A Hose Pinchers
- For diagnosing problems that require rubber or plastic fuel, vacuum and air lines to be temporarily closed
- Effectively seals lines without disconnecting
- Set of two

HCP6A Hose Pinching Pliers
- For sealing hose sizes 1/8"–5/16"
- For use on brake lines, fuel lines and vacuum hoses
- 6" long

HCP7A Hose Pinching Pliers
- For sealing hose sizes 1/2"–3/4"
- For use on heater hoses and vacuum lines
- 7" long

HCP10A Hose Pinching Pliers
- For sealing hose sizes 3/4"–2 1/4"
- For use on radiator hoses
- 10" long

HCP3KT Hose Pinching Pliers Set
- HCP6A, HCP7A and HCP10A (6", 7", 10") in storage pouch

SHP7 Hose Pinching Pliers
- Use to pinch off flexible lines to prevent spills when disconnected
- Spring loaded handle and lock for easy one-hand application and release
- Manufactured from strong, lightweight fiber reinforced synthetic polymer with extreme chemical resistance
- Use for small lines – 1/8" (3 mm)–3/4" (19 mm)

SHP10 Hose Pinching Pliers
- Use to pinch off flexible lines to prevent spills when disconnected
- Spring loaded handle and lock for easy one-hand application and release
- Manufactured from strong, lightweight fiber reinforced synthetic polymer with extreme chemical resistance
- Use for large lines – 3/4" (19 mm)–2 1/4" (57 mm)

SHP2KT Hose Pinching Pliers Set
- Use to pinch off flexible lines to prevent spills when disconnected
- Spring loaded handle and lock for easy one-hand application and release
- Manufactured from strong, lightweight fiber reinforced synthetic polymer with extreme chemical resistance
- Use SHP7 for small lines – 1/8" (3 mm)–3/4" (19 mm)
- Use SHP10 for large lines – 3/4" (19 mm)–2 1/4" (57 mm)

WARNING • Read safety precautions on pages W1 to W4

FUEL & ENGINE SYSTEMS: FUEL SYSTEMS

FIH9055

FIH9056

LDTF2

LDT8

LDT6

LDT14

ACT1370

LDT3730

Fuel Line Disconnect Tools

Fuel Line Coupling Release Tool Sets
- Designed to service special quick connect couplings found on fuel feed and return lines located at the engine

FIH9055 Fuel Line Coupling Release Tool Set
Includes a FIH9055-1 (5/16") and a FIH9055-2 (3/8") tool for GM® fuel lines.

FIH9056 Fuel Line Coupling Release Tool Set
Includes FIH9056-1 (1/2") and FIH9056-2 (5/8") for fuel and air conditioning quick connect couplers on most late model Ford® and Mazda® Navajo vehicles.

LDTF2 Fuel Line Disconnect Tool
- Disconnect the fuel line from the fuel filter on 5.3 L Suburban®, Tahoe®, Yukon®, Avalanche® plus select Silverado® and Sierra vehicles
- Can be used on other Flex Fuel systems

LDT8 Master Disconnect Set
- For spring lock and quick disconnect couplings used on air conditioning and fuel lines on *Ford*, *GM* and Chrysler® vehicles

LDT6 Disconnect Set
- Disconnects air conditioning, quick connect fuel lines and spring lock couplings on *Ford* and *Chrysler* AC lines
- Works on fuel lines and other quick disconnect couplings on US and import vehicles
- Angled to access tight spots
- Durable plastic resists fuels and solvents
- Includes six sizes from 1/2"–7/8"

LDT14 Master Plus Disconnect Set
- Contains all the tools in the LDT8 master disconnect set
- 3/8"–1/2" Jiffy-Tite® disconnect tools from the LDTSP4 set
- Blue 5/16" fuel line adaptor from the LDTF2 fuel line disconnect set
- Set of four air line push pull disconnect tools that work on heavy duty trucks and industrial applications

ACT1370 Disconnect Set (Blue-Point®)
- Useful on air conditioning spring couplings as well as push-lock connectors on radiator and transmission lines
- Includes six tools for disconnecting spring couplings on *Ford*, *GM* and *Chrysler* air conditioning lines
- Works on fuel lines and can be used as push-lock connectors on radiator and transmission lines
- Included sizes are 5/16", 3/8", 1/2", 5/8", 3/4" and 7/8"

LDT3730 Fuel and A/C Line Disconnect Pliers, 3/8"
- Unique design provides extra leverage when disconnecting quick-connect couplings on A/C and fuel lines
- Works in conjunction with 5/16", 3/8" or 1/2" adaptors from the ACT1370 or LDT6 disconnect sets
- Pliers' forks have different sized openings so the tool can be turned around to fit single- or two-step collar designed connector lines
- Can also be used to reconnect stubborn lines or connections that are in hard-to-reach areas

Steel Line Stoppers

LCSS600 Line Clamp and Stopper Set (6pc)
- Pliers used to pinch off flexible lines to prevent spills when disconnected
- Spring loaded handle and lock for easy one-hand application and release
- Two sizes to cover all hoses: Small 1/8"–3/4" and Large 3/4"–2 1/4"
- Stoppers used to seal steel lines once disconnected
- Spring loaded for quick install and removal
- Four sizes to suit 5/16", 3/8" and 1/2" pipe and banjo fittings
- Manufactured from strong lightweight fiber, reinforced with synthetic polymer offering extreme chemical resistance
- Manufactured from strong, lightweight fiber reinforced synthetic polymer with extreme chemical resistance
- Use for small lines – 1/8" (3 mm)–3/4" (19 mm)

SHP7 Pliers, Hose Pinching, 7"
SHP10 Pliers, Hose Pinching, 10"
SLS516SO Steel Line Stopper, 5/16"
SLS38SO Steel Line Stopper, 3/8"
SLS12SO Steel Line Stopper, 1/2"
SLSBANJOSO Steel Line Stopper, Banjo
LCSS600PB Blow Molded Case

LCSS600

SHP7

SHP10

SLS516SO

SLS38SO

SLS12SO

SLSBANJOSO

Disconnect Tools for Low-Profile Jiffy-Tite® Fittings

LDTJT5 Low-Profile *Jiffy-Tite* Disc Set
- Disengages the line from *Jiffy-Tite* quick connect fittings without removal of the clip
- Teeth of the tool fit perfectly into tight tolerance of the connectors
- When rotated, it allows the line to be pulled without damage to the connector or retaining clip so they can be reused
- Includes new 3/4" size, making this the most comprehensive kit on the market

LDTJT538 Low-Profile *Jiffy-Tite* Disc, 3/8"
LDTJT512 Low-Profile *Jiffy-Tite* Disc, 1/2"
LDTJT55830 Low-Profile *Jiffy-Tite* Disc, 3/8"-30°
LDTJT55839 Low-Profile *Jiffy-Tite* Disc, 3/8"-39°
LDTJT534 Low-Profile *Jiffy-Tite* Disc, 3/4"
LDTJT5PB Storage Case
Storage case for LDTJT5 Low-Profile *Jiffy-Tite* Disc set.

LDTJT5

OXYGEN AND FUEL SENSOR TOOLS

Fuel Sensor Wrench

GANM27 Fuel Sensor Wrench
- Use to remove the high pressure fuel sensor on the 3.6 FSI engine found on the VW® Touareg® and CC models plus Audi® Q7
- 12-point crowfoot socket engages every 30° for better access in restricted areas
- Special alloy steel provides the highest match of strength and durability
- 3/8" drive, 27 mm

GANM27

⚠WARNING
- Plastic coated handle does not protect against electric shock
- Read safety precautions on pages W1 to W4

FUEL & ENGINE SYSTEMS: OXYGEN AND FUEL SENSOR TOOLS

S6176

S6150

S6154

SWR1

SWR2

SWR4

SWR102

YA1239

YA9385

YA9375A

YA6675

YA6775

Oxygen Sensor

S6176 Oxygen Sensor Socket
- For service on most Nissan®, Mazda®, Honda® and Acura® vehicles
- Slotted side clears projections
- 22 mm 1/2" drive, 3 7/8" long

S6150 Oxygen Sensor Wrench
- Special crowfoot wrench design provides strength necessary for removal/installation
- 12-point, 7/8" wrench size, 1/2" drive
- Nickel-chrome finish

S6154 Oxygen Sensor Wrench
- For use on oxygen sensors on 2007 *Acura* RDX. 22 mm
- 12-point wrench opening, 1/2" drive
- Nickel-chrome finish

SWR1 Oxygen Sensor Wrench
- Designed for all oxygen sensors with a 7/8" hex
- Flex head offers essential clearance for removal/installation of oxygen sensors when sensor is positioned upward and inward to the floorboard or when leverage is needed around an exhaust pipe
- Ford® Contours® and 4.6 L and 5.4 L *Ford* Modular engines used in trucks and SUVs have this application
- Other applications include 7/8" and 22 mm knock sensors used on midsize trucks, SUVs and vans
- Flank Drive® wrenching system for greater applied torque
- Chrome finish for easy cleanup and protection against corrosion
- Compact, low-clearance head
- Overall length: 10 3/4". Hex: 7/8" 6-point. Head diameter: 1 9/16". Slot width: 1 5/16"

SWR2 Oxygen Sensor Socket
- For oxygen sensors located in the exhaust manifolds of 1981 and later cars and light trucks, including VW®
- 3/8" drive with 7/8" hex size
- 1/2" opening for easy access to oxygen sensor
- Ball detent in square drive for secure retention
- Industrial finish

SWR4 Oxygen Sensor Wrench
- Use on oxygen sensors with a 22 mm (7/8") hex
- Bent handle design with flex head offers extra clearance for removal and installation of shielded oxygen sensors and air/fuel sensors
- Chrome finish for easy cleanup and protection against corrosion
- Depth of socket and wall diameter of socket is critical for limited space inside heat shield
- Overall length: 10 3/4". Hex: 7/8" 6 point. Head diameter: 1 3/16". Slot width: 1/2"

Applications
- Toyota®: 2003 and later
- *Acura:* 2005 and later
- Lexus®, *Honda*, Hyundai® and Kia®: 2006 and later
- *Nissan*, *Mazda*: 2007 and later

SWR102 Oxygen Sensor Wrench Set
- SWR1 and SWR2 (2pc) in storage tray

YA1239 Dual Drive Oxygen Sensor Wrench (Blue-Point®)
- 1/2" and 3/8" drive
- Attach 1/2" breaker bar on the end of the tool to initially loosen stuck sensors, use a 3/8" ratchet on the top for fast removal and installation
- Fits oxygen sensor applications with a heat shield
- Slotted body allows clearance for wire harness
- Forged, heat-treated steel with 6-point design will withstand high torque removal applications

YA9385 Oxygen Sensor Socket *(Blue-Point)*
- Use to install and remove oxygen and vacuum sensors on most US and import vehicles
- Can be used with impact wrench
- 1 1/4" external hex. 19/32" x 2 3/4" slot to clear obstructions, 22 mm, 1/2" drive
- Black industrial finish

YA9375A Oxygen Sensor Wrench *(Blue-Point)*
- For oxygen sensors on GM® LT1 and LT5 5.7 L V8 engines
- Further applications on 2007 and later Harley-Davidson® motorcycles
- Eliminates need to unhook exhaust system when removing or reinstalling oxygen sensor
- 3/8" drive with 2 1/8" hex size
- Industrial finish

YA6675 Shielded Oxygen Sensor Socket *(Blue-Point)*
- For use on late model *Toyota* and *Lexus*
- Depth and outer diameter are critical for limited space inside heat shield
- 12-point double hex
- Forged for maximum strength

YA6775 Oxygen Sensor Wrench *(Blue-Point)*
- Designed for use with most oxygen sensors no matter what size electrical connectors they have
- Double sided design, 6- and 12-point configuration
- Pivoting handle design allows positive leverage in confined areas

Carburetor Adjustment Tools

2006IT Carburetor Adjusting Set
Includes: S6137E, S6138E, S6139, TM64, TM83A, TM85

S6137E Idle Adjusting Hex Head Driver
- For 1978 and later Chrysler® vehicles
- 3/32" hex driver is 1 9/16" long
- Nickel-chrome finish socket
- 7/16" OD
- 1/4" drive industrial finish bit

S6138E Idle Adjusting Driver
- For Ford® feedback carburetors
- 7/16" OD
- 1/4" drive
- Bit has a 3/16" x 1/32" flat tip, 2" long
- Nickel-chrome finish socket, industrial finish bit

S6139 Double "D" Carburetor Adjusting Socket
- For 1978 and later GM® idle adjusting screw
- OD drive end is 7/16"
- Nickel-chrome finish
- 3.5 mm across flats
- 1/4" drive
- 13/16" long

TM64 Rigid Adjusting Tool
- Rigid elbow bend rather than flexible feature
- Use with carburetor drivers for making carburetor and point adjustments
- Rigid shaft
- Overall length is 18 1/4", 1/4" drive

TM65 Flexible Adjusting Tool
- Flexible shaft end for working in restricted areas
- Overall length is 19 3/4", 1/4" drive
- Ideal for working in tight spaces when servicing window type distributors
- Knob markings allow for counting turns

TM615 Flexible Driver
- 1/4" drive
- Designed for carburetor work, this driver can also access buried distributors
- 1/4" drive at the end of a tough but flexible spring steel shank
- 18 5/8" long
- For low torque applications
- Ideal to access buried adjusting screws
- Cable length is 15"; overall length is 18 5/8"

TM83A Recessed Blade Carburetor Screwdriver
- 1/4" drive
- Use with TM64 or TM65 and other 1/4" square drive handles
- Blades are recessed in outer socket wall to self center
- Nickel-chrome finish
- 3/8 x 1/32" blade

TM84 Recessed Blade Carburetor Screwdriver
- 1/4" drive
- Use with TM64 or TM65 and other 1/4" square drive handles
- Blades are recessed in outer socket wall to self center
- Nickel-chrome finish
- 7/16" x 1/32" blade

TM85 Recessed Blade Carburetor Screwdriver
- 1/4" drive
- Use with TM64 or TM65 and other 1/4" square drive handles
- Blades are recessed in outer socket wall to self center
- Nickel-chrome finish
- 9/32" x 1/32" blade for adjusting late model Quadrajet carburetors

TAM3E Metric Hex Head Driver
- Use to make carbon monoxide adjustments on 1976 Dasher®, 1974–1976 Audi® and Volvo®, and 1975 and 1976 Fiat® and Saab® vehicles
- 3 mm bit size, 1/4" drive
- 6 7/8" long
- Nickel-chrome finish

WARNING
- Do not use chrome or industrial finish hand tools with impact drivers
- Read safety precautions on pages W1 to W4

FUEL & ENGINE SYSTEMS: DISTRIBUTOR SERVICE TOOLS

S8564B

S9707

S8176

S9609

S9622

S9626

US Distributor Wrenches

Stock No.	Wrench Size, inches
S8564B	1/2
S9707	1/2
M3515	9/16
S8176	9/16
S9609	9/16
S9622	9/16
S9626	9/16

S8564B Distributor Wrench
- Ford®, Lincoln® and Mercury® engines; clears leads and coils

S9707 Distributor Wrench
- *Ford*, *Mercury* and Cadillac® engines

M3515 Distributor Wrench
- GM® V6 and V8 trucks

S8176 Distributor Wrench
- Pontiac® and Oldsmobile® engines

S9609 Distributor Wrench
- Chevrolet® V8 engines

S9622 Distributor Wrench
- 1977 and later full-size *GM* cars with V8 engines

S9626 Distributor Wrench
- *GM* V6 engines

Metric Distributor Wrench

S6134 Metric Distributor Wrench
- 1982 and later *Cadillac* 4.1 L V8 engines, *GM* 2.8 L V6 engines, and 1985 VW® Golf® engines
- 15 mm

TM63A

ACD12B

Driver



TM63A Flexible Driver
- 1/4" drive
- For low torque applications
- For use on Delco-Remy® window type distributors

Stock No.	A	B	C
TM63A	1/4	4 21/32	9 3/16

Cleaning Brush

ACD12B Distributor Cleaning Brush (Blue-Point®)
- Wire brush cleans terminal connections on distributors and coils
- 5 1/4" long with a 4" long handle
- Wire diameter is .012"

Ignition Testers

YA2700

YA2700 Ignition Module Tester
- For testing Chrysler® 4-pin and 5-pin modules; GM® 4-pin, 5-pin, and 7-pin modules; plus Ford® 3-pin and "grommet" style modules
- LED indicator gives a simple "good" or "bad" reading



IT100

IT100 Ignition Tester
- For standard ignition systems
- Check for spark without removing spark plug from engine
- Testers attach to spark plug lead and spring clip attaches to appropriate ground

ITHE100

ITHE100 Ignition Tester
- Same as IT100 but for use on HEI systems

YA6465

Ignition Tools

YA6465 Ignition Modulator Wrench for *Ford* Vehicles
- Use to remove 7/32" (5.5 mm) hex retainer bolts on *Ford* ignition modules
- 1/2" hex drive

⚠WARNING
- Do not use "cheater bars" on handles
- Read safety precautions on pages W1 to W4

WELDING. WELL DONE.

The full contingent of Snap-on® MIG or TIG welders, accessories, plasma cutters, oxygen-acetylene torch kits and protective safety gear.

Performance — Weld thicker metal with longer weld times than other machines; higher-duty cycles and wider amperage ranges underscore industry-leading performance.

Durability — Metal wire feeder assemblies, copper-on-copper transformer construction and integral cooling fans provide increased longevity.

Safety — A variety of welding masks to fit multiple styles and needs; auto-darkening visors, protective sleeves and gloves, and more. Protect yourself with safe – and comfortable – equipment.

SNAP-ON® MUSCLE MIG/MIG WIRE FEED WELDERS

Snap-on MIG Welders have higher duty cycles at maximum amperage providing added weld times and performance that surpasses the competition. Ideal for many applications including automotive repair, collision, heavy duty truck, farm and metal fabrication shops. Added capabilities include a detachable feeder assembly, spot stitch (some models), along with the optional TIG accessory and aluminum spool gun packs.

Wire feed assembly, constructed of precision machined-cast aluminum, features all metal gearing and 800 in/min delivery for consistent wire speeds

Capacitor bank and diode set delivers consistent voltage and industry-leading smooth arc characteristics

All copper wound, tapped transformer features Nomex® insulation and bolted laminations to provide precise voltage control and repeatable welds

MIG220

MM250SL

MM350XL

230V MIG Welders

Stock No.	MIG220	MM250SL	MM350XL
Output Amperage Max (amps)	220	270	350
Duty Cycle Rating	60% @ 185A	100% @ 185A	100% @ 300A
Welding Capacity, Single Pass (in)	5/16	3/8	1/2
Voltage Settings – MIG/TIG	12/4	8/4	8/4
Spot-Stitch	No	Yes	No
Detatchable Feeder	No	Yes	Yes
Wire Size (inches)	0.023–0.045	0.023–0.045	0.023–0.063
Torch Length (ft)	10	10	12
Feeder Cable Length (ft)	N/A	15	15
Ground Cable Length (ft)	10	15	25
Power Input Cable Length (ft)	20	20	20
Input Voltage	208/230V AC, 50/60 Hz 1-ph	208/230V AC, 50/60 Hz 1-ph	208/230V AC, 50/60 Hz 1-ph
Input Amperage (recommended)	26/24	26/24	46/42
Gas Regulator-Flowmeter	Yes	Yes	Yes
Warranty*	2 Years	2 Years	2 Years

*Does not include cable or torch

TECHNICAL SUPPORT 1-800-ABC-WELD

⚠WARNING

- Wear face shield and protective clothing while welding and cutting
- Do not allow bystanders while welding and cutting
- Read safety precautions on pages W1 to W4

SNAP-ON® MUSCLE MIG/MIG WIRE FEED WELDERS

Snap-on MIG welders can be used as straight polarity with shielding gas or reverse polarity without shielding gas for flux cored wire. MIG125 and MIG135 are compact and portable for use on the worksite.

MIG140

MM140SL

MIG125

MIG135

115V MIG Welders

Stock No.	MIG140	MM140SL
Output Amperage Max (amps)	140	140
Duty Cycle Rating	60% @ 140A	100% @ 140A
Welding Capacity, Single Pass (in)	1/4	1/4
Voltage Settings – MIG/TIG	6/3	8/4
Spot-Stitch	No	Yes
Detatchable Feeder	No	Yes
Wire Size (inches)	0.023–0.035	0.023–0.045
Torch Length (ft)	10	10
Feeder Cable Length (ft)	n/a	15
Ground Cable Length (ft)	10	15
Power Input Cable Length (ft)	20	20
Input Voltage	115V AC, 50/60 Hz 1-ph	120V AC, 50/60 Hz 1-ph
Input Amperage (recommended)	30	15
Gas Regulator-Flowmeter	Yes	Yes
Warranty	2 Years	2 Years

*Does not include cable and torch

Portable MIG Welders

Stock No.	MIG125	MIG135
Output Amperage Max (amps)	125	135
Duty Cycle Rating	20% @ 80A	20% @ 90A
Welding Capacity, Single Pass (in)	3/16	3/16
Voltage Settings – MIG/TIG	4/-	7/-
Spot-Stitch	No	No
Detatchable Feeder	No	No
Wire Size (inches)	0.023-0.035	0.023–0.035
Torch Length (ft)	7	9
Feeder Cable Length (ft)	n/a	n/a
Ground Cable Length (ft)	8	8
Power Input Cable Length (ft)	6	6
Input Voltage	115V AC, 50/60 Hz 1-ph	115V AC, 50/60 Hz 1-hp
Input Amperage (recommended)	20	20
Gas Regulator-Flowmeter	Regulator	Regulator
Warranty	2 Years	2 Years

*Does not include cable and torch

TECHNICAL SUPPORT 1-800-ABC-WELD

MIG WELDER ACCESSORIES

Accessories – MIG Welders

Image	Stock No.	Description	MM140SL	MM250SL	MM350XL	MIG220	MIG140
	MHG5A	Aluminum Spool Gun Converts welders listed to aluminum welding	n/a	n/a	n/a	opt	opt
	MHG5B	Aluminum Spool Gun Converts welders listed to aluminum welding	opt	opt	opt	n/a	n/a
	CKSTP2125A	DC TIG Pack Adds DC TIG welding capability for welding ferrous metals	n/a	n/a	n/a	opt	opt
	FLEXTIG25	DC TIG Pack Adds DC TIG welding capability for welding ferrous metals	opt	opt	opt	n/a	n/a
	CKS2TK	Twin Cylinder Rack Converts models listed to carry 2 cylinders	n/a	opt	std	opt	n/a
	CKS15FN1030	Flexible Neck Torch Flexible neck torch for welding exhaust systems	opt	opt	opt	opt	opt

std=standard opt=optional n/a=not applicable

Parts and Consumables – MIG Welders

Stock No.	Description	MIG140	MM140SL	MIG220	MM250SL	MM350XL
CKS15TG1030	10 ft Cable and Torch (.030 wire)	std	std	opt	opt	—
CKS15TG1035	10 ft Cable and Torch (.035 wire)	opt	opt	std	std	—
CKS35XL1235	12 ft Cable and Torch (.035 wire)	—	—	—	—	std
CKS15TG1025	10 ft Cable and Torch (.025 wire)	opt	opt	opt	opt	—
CKS15TG1230	12 ft Cable and Torch (.030 wire)	opt	opt	opt	opt	—
CKS15TG1235	12 ft Cable and Torch (.035 wire)	opt	opt	opt	opt	—
CKS15TG1535	15 ft Cable and Torch (.035 wire)	opt	opt	opt	opt	—
CKS25SG1035	10 ft Cable and Torch (.035 wire)	opt	opt	opt	opt	—
CKS35XL1245	12 ft Cable and Torch (.045 wire)	—	—	—	—	opt
CKS35XL1535	15 ft Cable and Torch (.035 wire)	—	—	—	—	opt
CKS35XL1545	15 ft Cable and Torch (.045 wire)	—	—	—	—	opt
CKSM103LB	Liner for 10 ft Torch (.020–.030)	std	std	opt	opt	—
CKSM123LB	Liner for 12 ft Torch (.020–.030)	opt	opt	opt	opt	opt
CKSM104LN	Liner for 10 ft Torch (.030–.045)	opt	opt	std	std	—
CKSM124LN	Liner for 12 ft Torch (.030–.045)	opt	opt	opt	opt	std
CKSM3T2510	Contact Tip (.025), 10 ea.	opt	opt	opt	opt	opt
CKSM3T3010	Contact Tip (.030), 10 ea.	std	std	std	std	opt
CKSM3T3510	Contact Tip (.035), 10 ea.	opt	opt	opt	opt	std
CKSM3T4510	Contact Tip (.045), 10 ea.	opt	opt	opt	opt	opt
CKSM3TN50	1/2" Adjustable Nozzle	std	std	std	std	—
CKSM5C62	Nozzle with 5/8 ID	—	—	—	—	std
CKSM3TB2	Insulators (2 ea.) w/ O-rings, 6 ea.	std	std	std	std	—
CKSM3TBR3	Insulator O-rings (3 ea.)	std	std	std	std	—
CKSM3TD	Gas Diffuser	std	std	std	std	—
CKSM6D	Gas Diffuser	—	—	—	—	std
CKSM6B	Insulated Nozzle Bushing	—	—	—	—	std
CKSGRFM	Regulator Flowmeter	std	std	std	std	std

std = Standard opt = Optional

CKSMPK1 MIG Welder Parts Kit

- Standard MIG consumables such as contact tips, O-rings, nozzles, insulator and diffuser

CKSMPK10 Master MIG Welder Parts Kit

- Contains CKSMPK1 contents along with additional parts for aluminum spoolguns

Snap-on® MIG Welder Consumable Kits

Contains a selection of parts to repair *Snap-on* MM series, MIG220, MIG140, YA212AIND and FM140A welders along with MHG series spoolguns.

CKSMPK1

CKSMPK10

Portable MIG Welder Parts and Consumables

Stock No.	Description	MIG125	MIG135
CKSGR115	Regulator	std	std
MIG023	Contact Tip (.023), 10 ea.	std	std
MIG030	Contact Tip (.030), 10 ea.	opt	opt
MIG035	Contact Tip (.035), 10 ea.	opt	opt
MIG1151	Tapered Nozzle	std	std
MIG1152	Spot Weld Nozzle	opt	opt
MIG1153	Steel Liner	std	std
MIG1154	Nozzle Spring	std	std
MIG1155	9 ft Cable and Torch	—	std
MIG1156	Diffuser	std	std
MIG1157	Teflon® Liner (for aluminum wire)	opt	opt
CKS8124700	6 ft Cable and Torch	std	—

std = Standard opt = Optional

TIG Pack Parts and Consumables

Stock No.	Description	CKSTP2125A	FLEXTIG25
CKS3T332	Tungsten 3" – size 1/16"	std	std
CKS3C332	Collet for 3/32" Tungsten	std	std
CKS3T116	Tungsten 3" – size 1/16"	—	std
CKS3T418	Tungsten 3" – size 1/8"	std	opt
CKS3C116	Collet for 1/16" Tungsten	—	std
CKS3C418	Collet for 1/8" Tungsten	std	opt
CKS3CB116	Collet Body for 1/16" Tungsten	—	std
CKS3CB332	Collet Body for 3/32" Tungsten	std	std
CKS3CB418	Collet Body for 1/8" Tungsten	std	opt
CKSTIGSHARP	Chemical Tungsten Sharpener	opt	opt

std = Standard opt = Optional

Aluminum Spool Parts and Consumables

Stock No.	Description	MHG5A	MHG5B
CKSM5C62	Nozzle with 5/8 ID	std	std
CKSM5NB	Nozzle Body	std	std
CKSM5B	Insulated Nozzle Bushing	std	std
CKSM35NA62	Nozzle Assembly	std	std
CKSM35D	Gas Diffuser	std	std
CKSMGT2510	Contact Tip (.025) 10 ea.	opt	opt
CKSMGT3010	Contact Tip (.030) 10 ea.	opt	opt
CKSMGT3510	Contact Tip (.035) 10 ea.	std	std
CKSMGT36410	Contact Tip (3/64) 10 ea.	opt	opt
CKS404335	Aluminum Wire (Size .035) 1 lb	std	std
CKS404330	Aluminum Wire (Size .030) 1 lb	opt	opt
CKS4043364	Aluminum Wire (Size 3/64") 1 lb	opt	opt

std = Standard opt = Optional

⚠WARNING

- Wear face shield and protective clothing while welding and cutting
- Do not allow bystanders while welding and cutting
- Read safety precautions on pages W1 to W4

TIG WELDERS

Welds a variety of metals including steel, aluminum, stainless-steel and chromoly.

TIG150i

TIG150i Face Plate

TIG255i Face Plate

TIG255i

TIG Welders

- Welding Process Versatility: select between AC TIG, DC TIG or Stick Electrode welding options
- Amperage Control: fine adjustment range to weld extremely thin materials to maximum thicknesses
- TIG two- or four-stage continuous and pulse modes
- AC Balance Adjustment: penetration, balanced and cleaning
- Pulse and background amperage adjustment
- AC frequency adjustment
- Upslope/Downslope as well as post as flow adjustment
- High frequency/scratch starting modes

Specifications	TIG150i	TIG255i
Torch	Gas Cooled	Water Cooled
Input Voltage	208/230V AC	208/230V AC
Input Current	30 Amps	30/15.8 Amps
Output Current	5–150 Amps	220 Amps
Duty Cycle	60% @ 110 A	100% @ 160A, 40% @ 220A
Torch Lead Length	25'	25'
Ground Cable Length	25'	25'
Power Cord Length	12'	8'
Shipping Weight, lb (kg)	57 (26)	180 (81.6)

TIG150I TIG Welder

- Full featured 150 A TIG welder that's ideal for everyday shop use

TIG255i TIG Welder

- Full featured 255 A TIG welder with a water-cooled torch for longer weld times, cooler operation and enhanced dexterity
- Ideal for production welding environments

TIGINVRAD

TIGINVFP

TIG250EH

TIG Welder Accessories

Stock No.	Description	TIG150i	TIG255i
TIGINVFS	Remote Foot Switch	std	std
CKSGRFM	Regulator Flowmeter	std	std
TIG150GCA	Ground Cable Assembly	std	std
TIG150TA	Torch Assembly	std	—
TIG255TA	Torch Assembly	—	std
CKSKITTIG250	Consumable Kit	std	std
TIGINVRAD	Clip-On Torch Amperage Control	opt	opt
TIGINVFP	Foot Pedal Amperage Control	opt	opt
TIG250EH	Stick Electrode Holder	opt	opt
TIG250HC25	Leather Cable Cover	opt	opt

std = Standard opt = Optional

TECHNICAL SUPPORT 1-800-ABC-WELD

PLASMA CUTTERS

Snap-on® plasma cutters are ideal for cutting ferrous (steel, stainless-steel) metals as well as non-ferrous metals (aluminum) and new high-strength steels. Uses clean, dry compressed air, includes air regulator for accurate adjustment of air pressure for the best quality cut. Compact torch handle for accessing tight areas.

PLASMA30i

PLASMA60i

PLASMA50

PLASMA25

Plasma Cutters

Specifications	PLASMA30i	PLASMA60i	PLASMA50	PLASMA25
Output Amperage Max (amps)	Adjustable 5–25	Adjustable 20–55	30 and 50	25
Cut Thickness (in)	3/8	3/4	1/2	3/8
Sever Thickness (in)	1/2	1	3/4	3/8
Primary Input, (V)	115 or 230V AC, 50/60 Hz	208/230 V AC, 50/60 Hz	208/230V AC, 50/60 Hz	115 V AC 50/60 Hz
Primary Input, (A)	30A 115V or 20A 230V	40A	30A	20A
Duty Cycle Rating	100% @ 19A/60% @ 22A/35% @ 25A	100% @ 30A/60% @ 40A/35% @ 55A	40% @ 50A	20% @ 25A
Compressed Air Requirements (min)	50 PSI @ 7 CFM	68 PSI @ 7 CFM	88 PSI @ 7 CFM	88 PSI @ 5 CFM
Torch Cable Length (ft)	12	18	18	12
Ground Cable Length (ft)	12	18	18	12
Warranty	2 Years	2 Years	2 Years	2 Years
Net Weight, lb (kg)	29 (13.15)	44 (20)	137 (62)	55 (25)

*Does not include cable or torch

TECHNICAL SUPPORT 1-800-ABC-WELD

PLASMA CUTTER CONSUMABLES

PLASMA2304

PLASMA2305

PLASMA2308

PLASMA5005

PLASMA5001

PLASMA2504

PLASMA3003

PLASMA5003

PLASMA5004

Plasma Cutter Consumables

Description	PLASMA115	PLASMA230	PLASMA25	PLASMA50	PLASMA30i	PLASMA60i
Complete Torch Assembly	PLASMA1153	PLASMA23010	PLASMA2503	PLASMA5007	PLASMA3007	PLASMA5007
Metal Diffuser	–	–	PLASMA5005*	PLASMA5005*	–	PLASMA5005*
Short Nozzle (1 mm) 30–35 A	PLASMA2301†	PLASMA2301†	–	–	–	–
Electrode	PLASMA1151†	PLASMA2305†	PLASMA5004†	PLASMA5004†	PLASMA3004	PLASMA5004†
Long Electrode	PLASMA1152*	PLASMA2307†	–	–	–	–
Nozzle (0.7 mm)	–	–	–	–	PLASMA3002†	–
Nozzle (1.1 mm) 55A	–	–	PLASMA5002†	PLASMA5002†	–	PLASMA5002†
Long Nozzle (0.9 mm) 35 A	PLASMA2308†	PLASMA2308†	–	–	–	–
Long Nozzle (1 mm) 35–50 A	PLASMA2302**	PLASMA2302**	–	–	–	–
Nozzle Holder	PLASMA2304	PLASMA2304	PLASMA5001	PLASMA5001	PLASMA3001	PLASMA5001
Spacer Spring	–	PLASMA2309†	–	–	–	–
Swirl Ring	PLASMA23031	PLASMA23031	PLASMA5003*	PLASMA5003*	PLASMA3003*	PLASMA5003*
Torch Head Body	–	PLASMA23011	PLASMA5006	PLASMA5006	PLASMA3006	PLASMA5006
Two Point Spacer	–	–	PLASMA2504	PLASMA2504	–	PLASMA2504

One each per package unless otherwise noted
*Two each per package
**Three each per package
†Five each per package

WARNING

- Wear face shield and protective clothing while welding and cutting
- Do not allow bystanders while welding and cutting
- Read safety precautions on pages W1 to W4

GAS WELDING

WE200A

WE250A

Gas Welding

- Use for auto repair, construction, fabrication, manufacturing and maintenance
- Forged brass regulator is durable and strong
- Regulator diameter 2 1/4" allows precise control of gas
- Internal filter keeps particles from entering regulator
- PTFE Teflon® seal
- Handle shutoff valve color coding allows ease in identifying the corresponding gas control
- Two-piece cutting tip is easier to clean
- High quality hose offers reduced tear resistance and increased flexibility

WE200A Standard Duty Welding Kit

- Cuts up to 1" and welds up to 1/8". Cuts up to 4" and welds up to 1/2" with optional tips

WE250A Medium Duty Welding Kit

- Cuts up to 1" and welds up to 1/8". Cuts up to 5" and welds up to 1/2" with optional tips

Kit Components

Stock No.	Description	Set Contains: WE200A	WE250A
HRC1401340	85 Weld Handle w/ Check Valves	std	std
HRC1300380	72-3 Cut Attach	std	std
HRC9100614	D-85 Weld Mixer	std	std
HRC4300499	Twin Hose, 3/16 x 20	std	std
HRC4304482	Cover Goggle	std	std
HRC9004486	Striker	std	std
WE200A1	Oxygen Regulator	std	—
WE200A2	Acetylene Regulator	std	—
WE250A1	Oxygen Regulator	—	std
WE250A2	Acetylene Regulator	—	std
HRC1502172	6290-1 #1 AC Cut Tip	std	std
HRC1600890	23-A-90-5 #5 Weld Tip	std	std
HRC1600870	23-A-90-3 #3 Weld Tip	std	std
HRC1600850	23-A-90-1 #1 Weld Tip	std	std

std = Standard opt = Optional

Optional Accessories

HRC1800710 J-63-1 Heating Assembly
HRC1600840 23-A-90-0 #0 Weld Tip
HRC1600860 23-A-90-2 #2 Weld Tip
HRC1600880 23-A-90-4 #4 Weld Tip
HRC1502171 6290-0AC #0AC Cut Tip
HRC1502173 6290-2AC #2AC Cut Tip
HRC1502174 6290-3AC #3AC Cut Tip
HRC1502175 6290-4AC #4AC Cut Tip
HRC4302202 Torch Flash Arrestor (Pair)
HRC9000160 E-9 Tip Cleaner (2pc tip)
HRC9004484 Replacement Flints

WELDING ACCESSORIES

YA427B Welding Gloves

- Helps protect hands from sparks when welding
- Leather construction with added insulation for heat protection
- Reinforced palm for durability

YA427B

YA4282 TIG Welding Gloves

- Ideal for TIG welding processes
- Pigskin material for precise control
- Helps protect hands from heat and sparks
- Thick leather cuff for wrist protection

YA4282

YA4280 Welding Sleeves

- Helps protect arms from sparks when welding or cutting
- Elastic bands at each end of sleeve
- Constructed of flame retardant fabric

YA4280

SOLDERING

YAKS32A

Soldering Tips (YAKS32A)

Stock No.	Description	Size, inches (mm)
YAKS1-1	Single Flat Solder Tip	1/32" (1.0 mm)
YAKS1-2	Single Flat Solder Tip	3/32" (2.4 mm)
YAKS1-3	Single Flat Solder Tip	1/8" (3.2 mm)
YAKS1-4	Single Flat Solder Tip	3/16" (4.8 mm)
YAKS1-5	Double Flat Solder Tip	1/32" (1.0 mm)
YAKS1-6	Double Flat Solder Tip	3/32" (2.4 mm)
YAKS1-7	Double Flat Solder Tip	1/8" (3.2 mm)
YAKS1-8	Double Flat Solder Tip	3/16" (4.8 mm)
YAKS1-9	Hot Air Blower Tip	—
YAKS1-10	Hot Knife Tip	—
YAKS1-11	Plastic Case	—
YAKS112	Hot Air Blower Deflector	—
YAKS113	Hot Air Blower and Deflector Tip	—

Butane Soldering Iron Kit

Durable all around favorite featuring an ultrasonically welded gas tank for better strength, safety and reliability. Made with butane compatible plastics to help prevent gas from leaking.

- Converts to a heat shrink tool and hot knife with the addition of interchangeable tips
- Cordless butane powered, no cords or wires
- 12-month replacement warranty

YAKS32A Butane Soldering Iron Kit (25 W–125 W)

- Kit includes five soldering tips plus hot knife, hot air and hot air deflector tips
- Push-button electronic ignitor
- Torch and soldering iron all in one
- Run time 90 minutes plus continuous use
- Adjustable temperature control 25 W–125 W (equivalent)

YAS32A 2-in-1 Gas Soldering Auto-Ignition Tool (25 W–130 W)

- Includes YAKS1-6 2.4 mm Double Flat soldering tip
- Push-button electronic ignitor
- Torch and soldering iron all in one
- Run time 90 minutes plus continuous use
- Adjustable temperature control 25 W–125 W (equivalent)

YAKS22A

Butane Soldering Iron Kit

Versatile and compact professional soldering iron, featuring an ultrasonically welded gas tank for better strength, safety and reliability. Made with butane compatible plastics to help prevent gas from leaking.

- Converts to a torch, heat shrink tool and hot knife with the addition of interchangeable tips
- Cordless butane powered, no cords or wires
- 12-month warranty

YAKS22A Butane Soldering Iron Kit (15 W–75 W)

- Kit includes eight tips: Hot air, heat shrink, torch, hot knife with four soldering tips
- Push-button electronic ignitor
- Short distance from tip to grip gets you closer to your work
- Run time up to one hour
- Adjustable temperature control 15 W–75 W (equivalent)
- ESD safe antistatic

YAS22A Gas Soldering with Auto-Ignition (15 W–75 W)

- Includes YAKS226 2.4 mm Double Flat Tip
- Push-button electronic ignitor
- Short distance from tip to grip gets you closer to your work
- Run time up to one hour
- Adjustable temperature control 15 W–75 W (equivalent)
- ESD safe antistatic

YAKS22A Soldering Tips

Stock No.	Description	Size, inches (mm)
YAKS221	Single Flat Solder Tip	1/32" (1.0 mm)
YAKS222	Single Flat Solder Tip	3/32" (2.4 mm)
YAKS223	Single Flat Solder Tip	1/8" (3.2 mm)
YAKS224	Single Flat Solder Tip	3/16" (4.8 mm)
YAKS225	Double Flat Solder Tip	1/32" (1.0 mm)
YAKS226	Double Flat Solder Tip	3/32" (2.4 mm)
YAKS227	Double Flat Solder Tip	1/8" (3.2 mm)
YAKS228	Double Flat Solder Tip	3/16" (4.8 mm)
YAKS229	Hot Air Blower Tip	—
YAKS2210	Hot Knife Tip	—
YAKS2211	Hot Air Blower Deflector	—
YAKS2212	Flame Tip	—
YAKS2213	Hot Air Blower and Deflector Tip	—
YAKS2214	Instruction Sheet	—
YAKS2215	Carrying Case	—

YAKS300

Butane Soldering Iron Kit

YAKS300 Butane Soldering Iron Kit (50 W)

A robust economy model featuring an ultrasonically welded gas tank for better strength. Butane compatible plastics helps prevent gas from leaking.

- 12-month replacement warranty
- Easy to light with added flint ignitor in the cap
- 50 W equivalent with a 30-minute continuous use run time
- Safety cutoff switch when cap is replaced
- Cordless butane powered; no cords or wires
- Kit includes four tips, stand and cleaning sponge

YAS300 Butane Soldering Iron

YAKS300 Soldering Tips

Stock No.	Description	Size, inches (mm)
YAKS3001	Heater Element	—
YAKS3002	Fine Solder Tip	1/8" (3.2 mm)
YAKS3003	Chisel Solder Tip	1/8" (3.2 mm)
YAKS3004	Double Flat Solder Tip	3/16" (4.8 mm)
YAKS3005	Hot Knife Tip	—
YAK10-8	Hot Iron Stand	—
YAK10-9	Metal Sponge Cup	—
YAK10-10	Storage Case	—

Kit Comparison YAKS300, YAKS32A & YAKS22A

Products	YAKS300	YAKS32A	YAKS22A
Fine Tip	•		
1.0 DF Tip		•	•
2.4 DF Tip	•	•	•
3.2 DF Tip		•	•
4.8 mm Tip		•	•
Hot Knife Tip	•	•	•
Hot Blow & Deflector		•	•
Torch		•	•
Cleaning Sponge & Tray	•	•	•
Kit Box	•	•	•
Flint Ignitor cap	•		
Cap		•	•
Push Button Igniter		•	•
Max. Power (watts equivalent)	50	125	75
Adjustable Temperature Control	•	•	•
Run time, mins	30	90	60
Tips Included	4	8	8
ESD Safe	•	•	•

⚠WARNING

- Do not store butane at temperature over 120 °F
- Transport and dispose of butane in accordance with all regulations
- Read safety precautions on pages W1 to W4

SOLDERING

R450B

R450B Soldering Gun Kit
- Three different tip and element configurations give this tool great flexibility from delicate soldering to larger, heavy duty applications, such as automotive maintenance
- Slim, single post design ideal for confined work areas
- Fast heat-up
- Built-in spotlight to illuminate the work area
- Integral tool stand keeps heated part of the tool out of harm's way
- Polarized plug and professional quality
- Packed in a plastic storage case
- UL® listed

R460B

R460B Heavy Duty Soldering Gun Kit (Blue-Point®)
- Heavy duty soldering gun for those big jobs, quick and efficient
- Built-in spotlight illuminates the work area
- Balanced tool design is more comfortable and easier to use
- Tip heats up in less than ten seconds
- Quick change type tips can be easily changed within 30 seconds
- Integral tool stand keeps heated part of the tool from damaging surrounding areas
- Packed in a plastic storage case
- *UL* listed

R490

R490 Industrial Soldering Gun *(Blue-Point)*
- Dual wattage elements: high wattage heats tip in seconds, lower wattage maintains rated tip temperature
- Effective tip temperature of 1,000 °F or more for heavy duty, sustaining soldering
- Trigger activated control is convenient, easy to use and provides instant response
- Built-in worklight illuminates the work area
- Plug-in tip and element (TE) assemblies are plug in units that can be changed within a minute
- Integral tool stand prevents heated part of tool from damaging surrounding areas
- Plastic storage case
- *UL* listed

R490400 Replacement Soldering Tip
R490500 Optional Soldering Tip

Irons

R40B

R40B Industrial Soldering Kit
- 40 W solder iron is ideal for large solder jobs like battery terminal cables or radiator repair. Threaded tips offer improved heat exchange compared to set screw types
- Features a heat deflection shield, 4 3/4" long handle, 8 1/2" overall length and 8' power cord
- Includes pointed, chisel and fine tips plus 1/2 oz of lead-free rosin core solder and holder
- *UL* listed
- 120V, 60 Hz

R25A

R25A Industrial Soldering Kit
- Lightweight 25 W pencil style kit for fine soldering applications
- Threaded tips offer improved heat exchange
- Features a heat deflection shield, 4 3/4" long handle, 8 1/2" overall length and 8' power cord
- Includes pointed, chisel and fine tips plus 1/2 oz of lead-free rosin core solder and holder
- *UL* listed
- 120V, 60 Hz

R60B

Soldering Stations

R60B (60 W) Soldering Station *(Blue-Point)*
- Includes low voltage, temperature-controlled soldering pencil that features a heat shield, a non-burnable silicone rubber cord and a plug-in tip design
- Transformer powered
- 700 °F; 1/16" screwdriver tip included
- 120V, 60 Hz
- Optional 700 °F tips for R60B or RH60B

Optional Tips

Item	Description
R60A7	Screwdriver 1/16" Tip (700 °F)
R60A8A	Screwdriver 1/16" Tip (800 °F)
R60B7	Screwdriver 3/32" Tip (700 °F)
R60B8	Screwdriver 3/32" Tip (800 °F)
R60D7	Screwdriver 3/16" Tip (700 °F)
R60O7	Long Conical 1/32" (700 °F)
R60R7	Narrow Screwdriver 1/16" Tip (700 °F)
R60R8	Narrow Screwdriver 1/16" Tip (800 °F)
R60S7	Long Conical 1/64" Tip (700 °F)

TORCH6

TORCH2A

TORCH3A

TORCH4

Miniature Butane Soldering Torches

TORCH6 Butane Torch
- Features an ultrasonically welded gas tank for better strength, safety and reliability
- Made with butane compatible plastics, prevents gas leaking
- 18-month replacement warranty
- Robust burner specifically designed to protect the ceramic greatly extends the life of the torch
- Twin spark ignition, lights first time every time
- Massive 2.797 Btu/h flame power
- Adjustable flame length up to 4 1/2"
- Temperature up to 2,462 °F (1,350 °C)
- Almost four times more powerful than any other butane micro torch

TORCH2A Turbo Torch (Blue-Point®)
- Child-resistant Piezo Ignition System
- Instant 1,300 °C/2,400 °F Micro Flame
- Pocket size
- Internal fuel tank
- 20 minutes of continuous use per refilling

TORCH3A Professional Torch *(Blue-Point)*
- Child-resistant Piezo Ignition System
- Instant 1,300 °C/2,400 °F pencil point flame
- Adjustable gas control valve
- Safety continuous-use lock
- 20 minutes of continuous use per refilling

TORCH4 Butane Blow Torch *(Blue-Point)*
- Ultrasonically welded gas tank for better strength and safety
- Butane compatible plastics prevents gas leaks
- Powerful wind resistant flame with 751 Btu/h
- Temperature up to 2,462 °F (1,350 °C)
- All-in-one easy-to-use on/off ignition switch
- Adjustable flame length up to 3 1/2"
- Run time is a continuous 40 minutes plus
- 220 W equivalent

SOLDERING ACCESSORIES

Butane Fuel Cans

BUTANE15CSA Butane Fuel Cans (Case of 24)
- Triple filtered butane fuel for use with TORCH2A, TORCH3A, TORCH4 and TORCH6 mini torches, YAKS300/YAKS32A/YAKS22A soldering irons and GLUEGUN3/GLUEGUN4KT glue guns
- Universal filling tip can be used with most refillable butane products as well
- Case of (24) 1.5 oz cans

BUTANE15CSA

Solder Suckers

YA477A Solder Sucker
- Low static unit designed for desoldering electrostatic discharge sensitive components
- Set plunger and release creates a vacuum that draws up solder

YA477-1 Replacement Tip
Replacement tip for YA477A

YA477A

YA476A

YA476A Small Solder Sucker
- Smaller version of YA477A above
- Includes self-cleaning feature

YA476-1A Replacement Tip
Replacement tip for YA476A

Tweezers *(Blue-Point)*

TZK5 Tweezers Kit
Includes five tweezers in a vinyl zipper pouch.
- All stainless-steel construction
- Pointed tweezers with plain ends, 4 3/8" long
- Self-closing tweezers with plain ends, 4 1/2" long
- Self-closing, weighted solder tweezers with serrated blunt end, 7" long
- Sharp point utility tweezers with bent plain ends, 7" long
- Sharp point utility tweezers with plain ends, 7" long

TZK5

TZK7 Tweezers Kit
Includes seven tweezers in a black vinyl zipper pouch.
- All stainless-steel construction
- Pointed tweezers, 4 3/8" long
- Curved head utility tweezers, 6 3/4" long
- Self-closing, heat-resistant tweezers, 6" long
- Sharp pointed utility tweezers, 7" long
- Side locking tweezers, 6" long
- Spade point tweezers, 4 3/8" long
- Weighted solder tweezers, 6" long

TZK7

Miniature Tool/Pliers *(Blue-Point)*

Stainless-steel, three notch ratcheting locking mechanisms lock onto small objects with varying degrees of pressure. 1/16" tips; 1 3/8" long jaws.

MPC7A Mini-Pliers
Curved, serrated jaws. 7" long

MPC10A Mini-Pliers
Curved, serrated jaws. 10" long

MPS7A Mini-Pliers
Straight, serrated jaws. 7" long

MPS10A Mini-Pliers
Straight, serrated jaws. 10" long

MPK4A Mini-Pliers Set
MPC7A and MPC10A plus MPS7A and MPS10A (4pc) in black zipper pouch

MPC7A

MPS7A

MPK4A

⚠WARNING

- Do not store butane at temperature over 120 °F
- Transport and dispose of butane in accordance with all regulations
- Read safety precautions on pages W1 to W4

WELDING ACCESSORIES

YA4601

YA4602

YA4603

YA4604

YA4606

YA4607

YA4608

YA4609

Welding Helmets (Auto Darkening)

Auto darkening welding helmets are triggered automatically by UV light sources. Some models have adjustable sensitivity for various light conditions and an adjustable delay setting to maintain dark state for extended periods of time. Fixed shade helmets offer a fixed #10 shade triggered automatically by UV light. Clear shade provides operator visibility to line up work prior to welding.

Specifications	YA4601†	YA4602*†	YA4603*†	YA4604†	YA4606†	YA4607	YA4608	YA4609
Shade	#9–13	#9–13	#10	#9–13	#9–13	#6–13	Adjustable	Adjustable w/ Grind Lockout
Sensitivity	Adjustable	Adjustable	Fixed	Adjustable	Adjustable	Adjustable	Adjustable	Adjustable
Delay	Adjustable	Fixed	Fixed	Adjustable	Adjustable	Adjustable	Adjustable	Adjustable
Clear Shade	#3.5	#3.5	#3	#3.5	#3.5	#3.5	—	—
Viewing Area (in)	3.81 x 2.40	3.81 x 1.88	3.81 x 1.38	3.81 x 2.40	3.74 x 3.35	3.74 x 3.35	3.82 x 2.44	3.74 x 3.35
Viewing Area (square in)	9.14	7.16	5.26	9.14	12.53	12.53	9.32	12.53
Number of Sensors	4	2	2	4	4	4	4	4
Delay Time (s)	0.2–1.0	0.1–1.0	0.25–0.045	0.1–1.0	0.1–1.0	0.1–1.0	—	—
Switching Speed (ms)	0.04	0.04	0.04	0.04	0.4	0.4	—	—
Power Supply	Solar-Lithium	Solar	Solar	Solar-Lithium	Solar-Lithium	Solar-Lithium	Solar-Lithium	Solar-Lithium
Applicable Standards	ANSI®, CE, DIN, EN, CSA, AS/NZS	*ANSI*, CE, DIN, EN, CSA, AS/NZS	*ANSI*, CE, DIN, EN, CSA, AS/NZS	*ANSI*, CE, DIN, EN, CSA, AS/NZS	*ANSI*, CE, DIN, EN, CSA, AS/NZS	*ANSI*, CE, DIN, EN, CSA, AS/NZS	*ANSI*, CE, DIN, EN, CSA, AS/NZS	*ANSI*, CE, DIN, EN
Opt. Magnifying Lens 1.5x/2.0x	YA4600MAGKT	YA4600MAGKT	YA4600MAGKT	YA4600MAGKT	YA4600MAGKT	YA4600MAGKT	YA4600MAGKT	YA4600MAGKT
Warranty	2 Years	1 Year	1 Year	2 Years	2 Years	2 Years	3 Years	2 Years

*Blue-Point®
†CE

EFPGREENSKL

EFPBLACKICE

EFP2CAMO

EFP2MORBID

EFP2PREDATOR

Welding Helmets (Auto Darkening) Con't

Specifications	EFPGREENSKL	EFPBLACKICE	EFP2CAMO	EFP2MORBID	EFP2PREDATOR
Shade	#9–13	#9–13	#9–13	#9–13	#9–13
Sensitivity	Yes	Yes	Yes	Yes	Yes
Delay	Yes	Yes	Yes	Yes	Yes
Clear Shade	4	4	4	4	4
Viewing Area (in)	3.62 x 1.42	3.62 x 1.42	3.82 x 1.85	3.82 x 1.85	3.82 x 1.85
Viewing Area (square in)	23	23	40	40	40
Number of Sensors	2	2	4	4	4
Delay Time (s)	Adjustable	Adjustable	Adjustable	Adjustable	Adjustable
Switching Speed (ms)	.3	.3	.08	.08	.08
Power Supply	CR2450 Replaceable	CR2450 Replaceable	Lithium Ion (Auto On/Off)	Lithium Ion (Auto On/Off)	Lithium Ion (Auto On/Off)
Applicable Standards	CE, CSA, ANSI®	CE, CSA, *ANSI*	CE, CSA, *ANSI*	CE, CSA, *ANSI*	CE, CSA, *ANSI*
Opt. Magnifying Lens	1.0, 1.5, 2.0	1.0, 1.5, 2.0	1.0, 1.5, 2.0	1.0, 1.5, 2.0	1.0, 1.5, 2.0
Warranty	2 Years (ADF) 1 Year (all others)	2 Years (ADF) 1 Year (all others)	2 Years (ADF) 1 Year (all others)	2 Years (ADF) 1 Year (all others)	2 Years (ADF) 1 Year (all others)

EFPBONEHEDB

EFPSTRIKERB

EFPJURASSIC

EFPOLEGLORY

EFPHANNIBALB

EFPNITESTLKRB

Welding Helmets (Fixed Shade)

Fixed shade welding helmets offer shade #10 protection.
Hinged mask can be adjusted for hands-free drop down.

Specifications	EFPBONEHEDB	EFPSTRIKERB	EFPJURASSIC	EFPOLEGLORY	EFPHANNIBALB	EFPNSTLKRB
Lens Style	180° Peripheral	180° Peripheral	180° Peripheral	180° Peripheral	180° Peripheral	180° Peripheral
Shade	#10	#10	#10	#10	#10	#10
Viewing Area (in)	—	—	—	—	4.25 x 2.0	—
Viewing Area (square in)	35.6	35.6	35.6	35.6	8.5	35.6
Applicable Standards	*ANSI*	*ANSI*	*ANSI*	*ANSI*	*ANSI*	*ANSI*
Lens (included)	EFPCLLENSREP	EFPCLLENSREP	EFPCLLENSREP	EFPCLLENSREP	EFP10WLDLENS, EFPCLLENSREP	EFPCLLENSREP
Opt. Magnifying Lens 1.5x	—	—	—	—	—	—
Opt. Magnifying Lens 2.0x	—	—	—	—	—	—
Opt. Auto Darkening Lens	EFPADFLENSA	EFPADFLENSA	EFPADFLENSA	EFPADFLENSA	EFPADFLENSA	EFPADFLENSA
Warranty	1 Year	1 Year	1 Year	1 Year	1 Year	1 Year

†CE

⚠WARNING

- Wear welding helmet and protective clothing while welding and cutting
- Do not allow bystanders while welding and cutting
- Read safety precautions on pages W1 to W4

WELDING ACCESSORIES

KRBC60T

MIGCARTA

Welding Carts

KRBC60T Welding Cart
- 3/8" plate steel work surface
- Four dual-purpose mounting locations serve as accessory mount and wand holder
- HD textured black matte finish
- Large locking compartment stores two welders
- Slots-n-dots™ rear panel accommodates many accessories
- Three drawers with liners and high quality roller bearing slides
- Three large cord hooks included – extra hook kits available
- 50 3/4" W x 25 3/4" D x 37 1/2" H
- 1,000 lb load capacity

MIGCARTA Welder and Plasma Cutter Cart (Blue-Point®)
- 21" L x 14.5" W top tray for storage of MIG welders and plasma cutters
- Includes multiposition cylinder bracket for various bottle sizes
- Includes two hooks for cable storage

YA247

YA247 Welder's Marking Set
Includes:
- YA247-2 Soapstone marker for making temporary markings
- YA247 Scribe with a sharp, tough carbide tip for making permanent markings
- Replaceable soapstone
- Each tool has a tough aluminum barrel
- Soapstone marker includes built-in sharpener
- Convenient storage pouch

YA247-1 Scribe
YA247-2 Soapstone Marker

EFPADFLENSA

EFP Series Welding Lenses

Optional auto darkening lens available for all EFP series helmets

The World's first and ONLY unobstructed ADF integrated, 180° degree peripheral vision ADF welding lens. Has a military grade anti-scratch coating to help prevent scratching. ADF Lens is easily replaced.
Viewing Area: 4.25" L x 2.0" W
Power Supply: Solar Lithium Combo
One-Year Warranty

EFP3WLDLENS #3 Welding Lens
EFP5WLDLENS #5 Welding Lens
EFP8WLDLENS #8 Welding Lens
EFP10WLDLENS #10 Welding Lens
EFP12WLDLENS #12 Welding Lens
EFPADFLENSA Auto Darkening Lens

YA4600MAGKT

Welding Lenses

YA4600MAGKT Magnifying Lens Kit
- Comes complete with 1.5x and 2.0x magnifying lenses and lens holder
- Optional accessory provides additional magnification for YA4601, YA4602, YA4603, YA4604 and YA4606 welding helmets only
- CE

WCH3

Welding Hammer

WCH3 Welder's Chipping Hammer
- Features pick end and 3/4" chisel head end
- Heat treated high alloy steel for long life
- Overall length is 11"
- Head length is 7 1/2"

WELDING CLAMPS

CL402A

C-Clamps

- Equipped with antis-patter spindles, precision cut from hardened steel
- Forged frames have extra deep throats for additional strength and work capacity
- Grooved anvil, in combination with a serrated pad, provides nonslip grip on various metal surfaces
- Spindles, handles and pads are copper plated to avoid collecting spatter

Stock No.	Capacity, inches	Throat Depth, inches
CL402A	0–2	2
CL403A	0–3	2 1/2
CL404A	0–4	2 7/8
CL406A	0–6	3 5/8
CL408A	0–8	4 1/2
CL410A	2–10	5 5/8
CL412A	2–12	5 3/4



VGP12212

Large Jaw

- Multipurpose tool with larger jaw capacity for general maintenance and screw-in oil filter removal

Stock No.	A inch (mm)	B inch (mm)
VGP12212	3 15/16 (100)	12 (300)

VGP12412

Locking C-Clamps/Standard Tip

- Quick and easy handling clamps for auto body and metal fabrication applications

Stock No.	A inch (mm)	B inch (mm)
VGP12406	2 5/16 (60)	6 (152.4)
VGP12412	3 15/16 (100)	12 (304.7)
VGP12418	10 1/4 (260)	18 (457.2)
VGP12424	15 11/16 (400)	24 (609.6)

VGP22418

Locking C-Clamps/Swivel Tip

Stock No.	A inch (mm)	B inch (mm)
VGP22406	1 5/16 (50)	6 (152.4)
VGP22412	3 15/16 (100)	12 (304.7)
VGP22418	9 7/16 (240)	18 (457.2)
VGP22424	15 11/16 (400)	24 (609.6)

VGP12509

VGP12509 Locking U-Clamps

- U-shaped jaws allow access and visibility when welding

VGP12808

VGP12808 Locking Clamps/Sheet Metal

- Wide jaws allow clamping, bending, forming and crimping of sheet metal without gripping effort

Auto Body/Welding Sets

VGP104 Autobody/Welding Locking Pliers Set

- Includes VGP23312 self-leveling jaws pliers, VGP13709 plugweld pliers plus VGP14412 and VGP12406 c-clamp pliers (4pc) in VGP1041 kit bag

CL408VIS

High Visibility C-Clamps

- Similar to CL series C-clamps
- High visibility models conform to OSHA safety color standard for physical hazards regulation #19110.144
- 3/4" spindle diameter

Stock No.	Capacity, inches	Throth Depth, inches
CL404VIS	0–4 1/2	3 1/4
CL406VIS	0–6 1/16	3 5/8
CL408VIS	0—8 1/4	5

VGP13420

VGP13420 Locking C-Clamps/Long Reach

- Wide profile with perforated jaws allows clamping around large objects with uniform tension distribution

VGP14412

VGP14412 Locking C-Clamps/Aluminum Alloy

- Lightweight aluminum jaw will not bend or distort body panels
- Welding pellets will not adhere to jaw

VGP23312

VGP23312 Locking Clamps/Self Leveling Jaws

- Swivel pads and narrow jaw profile firmly grip tapered surfaces in areas where c-clamps cannot fit

VGP13709

VGP13709 Locking Pliers/Plugweld

- Copper alloy knurled pad prevents burn-thru when plug welding thin sheet metal

MG2000K

Welding Clamps/Miniature

- Micro size for optimal access into confined spaces
- Aluminum alloy body ensures robustness with minimal weight while resisting splatter and corrosion
- Design permits exertion of 1/2 ton of force without deformation
- Perforated jaw allows attachment to fixtures and connection of ground cables
- One-handed “no pinch” clamping and release

MG2000K Micro Grip Locking Clamp Set

- Includes four micro grip clamps

WARNING

- Wear welding helmet and protective clothing while welding and cutting
- Do not allow bystanders while welding and cutting
- Read safety precautions on pages W1 to W4

SPOT WELDERS

YA22300A

YA22300A Standard Duty Spot Welder
- Produces spot welds for collision repair
- Squeeze type action produces factory style welds
- Optional accessories can increase welding capability

YA223001 Welding Tip
- Long spot welding tip for YA22300A

YA223002 Welding Tip
- Short spot welding tip for YA22300A

YA223003 Welding Tip
- Replacement drip rail welding tip for the YA223004 welding cable assembly

YA223004A Welding Cable Assembly
- Accessory welding cable assembly for the YA22300A
- Allows welding from a single side such as door skins and other applications

YA223005A Dent Puller Kit
- Fast, effective dent repair without drilling holes or using draw pins

YA223006 Welding Tip
- Replacement welding tip for the YA223004 welding cable assembly

YA223009 Welding Tip
- Drip rail spot welding tip for YA22300A

YA22357 Trigger Switch
- Replacement switch



Long Reach Electrode

Wheelhouse Electrode

YA22355

YA22355 Heavy Duty Liquid Cooled Spot Welder
- Designed to produce factory type spot welds in collision repair
- Squeeze type action produces factory style welds
- Pneumatic gun welds through primers, sealers and adhesives
- Features coolant circulation throughout the welding tips for consistent weld penetration
- Included accessories: 14" long reach electrode and wheelhouse electrode

YA26143 Long Reach Wheelhouse Replacement Tips

YA26144 Standard Wheelhouse Replacement Tips

YA2097335 J-Shaped Wheelhouse Replacement Tips

Specifications	Primary Voltage	Line Fuse	Maximum Output	Maximum Thickness	Coated Metal Capability	Kva Rating	Shipping Weight, lb
YA22355	208/230V AC	60A	6000 Amps	3 pcs. 20 ga.	Yes	6	300
YA22300A	208/230V AC	50A	2800 Amps	2 pcs. 20 ga.	No	4	120

DENT PULLERS/ACCESSORIES

YA22345KT

YA223453

Stud Gun Dent Pullers

YA22345KT Stud Gun Dent Puller Kit
- Kit includes stud gun, welding tips, slide hammer and T-puller
- Used to pull dents by welding pins to work piece
- Stud gun uses minimal heat to reduce burn through

YA22345 Stud Gun

YA223451 Draw Pins (2 mm)
- Soft for easy flexing and grinding
- Delivers 500 lb pull
- Pack of 500

YA223452 Draw Pins (2.5 mm)
- Soft for easy flexing and grinding
- Delivers 500 lb pull
- Pack of 500

YA223454 T-Puller
- Compact for small damage repair on lightweight metal
- Helps reduce overpull

YA223453 Magna Clamp
- Features wing nut and is self- tightening
- Locks onto draw pins for pulling dents

YA223455 Slide Hammer
- Polished steel bar with rubber handle ensures positive pulling action

YA223456 Shrinking Electrode
- Provides fast heat

YA223457 Pin Electrode
- Holds all standard size pins

YA223458 Trim Rivets
- Used to repair metal trim strips
- Weld onto panel and provide permanent retention to trim strip
- Pack of 500

YA223459 Rivet Electrode
- For use with YA223458 trim rivets
- Retains trim rivet for welding

YA22375

YA22350C

Portable Dent Pulling System

- Easily pulls dents on roofs, hoods and side panels
- Star tip design eliminates the need to drill holes or cut pin heads
- Built-in slide hammer speeds up the pulling process (YAH22350C only)

Specifications	Type	Primary Voltage	Line Fuse	Power Input Cable, ft (m)	Power Lead Length, ft	Ground Cable Length, ft	Shipping Weight, lb
YA22350C	Star Tip	120V AC, 50/60 Hz	30A	25 (7.6)	7	7	64
YA22375	T-handle	120V AC, 50/60 Hz	30A	25 (7.6)	10	7	64
YAH22350C	Star Tip	208/230V AC, 50/60 Hz	30A	25 (7.6)	7	7	64
YAH22375	T-handle	208/230V AC, 50/60 Hz	30A	25 (7.6)	7	7	64

YA2235CART

YA2355

YA2352

YA2358

Portable Dent Puller Accessories

YA2235CART Accessory Cart
Adds additional height and portability

YA2355 Star Tips
Replacement tips (10 ea.) for the YA22350C, YAH22350C and YA223005

YA2351 Welding Tip
Optional long stud welding tip

YA2352 Welding Tip
Optional molding rivet welding tip

YA2353 Heating Tip
Replacement heat shrink heating tip

YA2358 Magnetic Base
Replacement magnetic ground clamp

YA22357 Trigger Switch
Replacement switch

YA223008 Pry Bar
Replacement pry bar for YA22375 and AH22375, optional for YA22350C and YAH22350C

Quick Claw Dent Puller Set

YA22351 Quick Claw Dent Pulling Set

- Used with YA22350C, YAH22350C, YA22375 and YAH22375
- Used to establish multiple pull points along dents
- Independent finger action of claw varies the pulling force at multiple points
- Can pull by hand, slide hammer or chain
- Comes with claw, two tips and 24 wires

YA22352 Claw Handle
Four-finger "claw" pulling handle. One included in set

YA22353 Welder Tips
Welding tips for YA22354 welding wires. Two included in set

YA22354 Weld Wires
1/2 lb welding wires. 24 included in set

YA22351

⚠WARNING

- Wear welding helmet and protective clothing while welding and cutting
- Do not allow bystanders while welding and cutting
- Read saftey precautions on pages W1 to W4

KEEP YOUR GARAGE RUNNING LIKE A WELL-OILED MACHINE.

Be prepared for any vehicle that comes your way. Snap-on provides the tools and equipment you need to work efficiently and always get the job done like a pro. Whether you're adding services or upgrading equipment, we've got the high-quality tools and equipment you need.

With quality-built service tools like torque sticks and lug nut sockets, any tech can handle the job with speed and accuracy. And the Snap-on® Ball Joint Press will allow you to remove and install ball joints with ease, so you're not wasting any time.

Service your customers wide array of needs with *Snap-on* Tire Changers and Wheel Balancers. Add the Tire Pressure Monitoring tool and related accessories to the mix to better service your customers' critical systems.

Snap-on® Wheel Balancers use a patented Virtual Plane Measurement system to achieve accuracy and repeatability. A variety of weight placement options such as Static, Dynamic, five ALU modes, ALU-S, hidden spoke and match mounting optimization modes provide the versatility for these balancers in a variety of applications on passenger cars, light trucks and commercial vehicles.

Wheel Balancers

EEWB330A

EEWB331A

EEWB332A

- Features static and dynamic balancing modes
- Five ALU modes to place weights in proper location on multiple wheel configurations
- Input of rim distance and diameter by SAPE arm for accelerated setup time
- ALU-S modes allows exact weight placement on rim when using tape weights
- Weight minimization and balancing optimization modes for reducing the overall weight usage
- Spoke mode to hide weights behind spokes
- Stadium weight tray is curved to access weight pockets easily
- Quick clamp speed nut with release to reduce removal time
- Multiple operator feature allows several users to quickly recall settings
- Sonar sensor automatically calculates rim width (EEWB332A)

Specifications	EEWB330A	EEWB331A	EEWB332A
Operation	Hand spin	Motorized	Motorized
Accuracy, oz (grams)	0.10 (2)	0.10 (2)	0.10 (2)
Rim Diameter, inches (mm)	8–30 (203–762)	8–30 (203–762)	8–30 (203–762)
Rim Width, inches (mm)	3–20 (76–508)	3–20 (76–508)	3–20 (76–508)
Maximum Tire Diameter, inches (mm)	42 (1067)	42 (1067)	42 (1067)
Maximum Wheel Width, inches (mm)	20 (508)	20 (508)	20 (508)
Maximum Tire/Wheel Weight, lb (kg)	120 (54)	120 (54)	154 (69)
Shaft Speed at Calculation, RPM	100	200	200
Cycle Time, seconds	6–10	6–8	6–8
Electrical Requirements	115V AC, 1 phase, 60 Hz, 2A	115V AC, 1 phase, 60 Hz, 6A	115V AC, 1 phase, 60 Hz, 6A
Shipping Weight, lb (kg)	224 (102)	280 (127)	366 (166)
Required Floor Space	52" W x 48" D	60" W x 48" D	60" W x 48" D

EEWB330A Hand Spin Wheel Balancer
- Small footprint handspin wheel balancer with features of most high-end machines

EEWB331A Motorized Wheel Balancer
- Small footprint motorized wheel balancer with features of most high-end machines

EEWB332A Motorized Wheel Balancer with Raised Display
- Medium footprint motorized wheel balancer with a high-end feature set with faster throughput times

Standard Accessories – 40 mm Shaft

Stock No.	Description	Stock No.	Description
EAM0003J05A	EAM0003D23A Cone, 40–76mm/1.6"–3.0"	EAC0058D15A	Rubber Protector
EAM0003J06A	EAM0005D24A Cone, 71–99mm/2.8"–3.9"	EAM0021D90A	Stub Shaft 40 mm
EAM0003J07A	EAM0005D25A Cone, 96–114mm/3.8"–4.5"	WWPR13A	Wheel Weight Pliers
EAM0003J08A	EAM0003J69A Cone, 87–137mm/3.4"–5.4"	EAA0247G21A	Rim Width Caliper
EAA0263G66A	Quick Nut 40 mm	EAA0346J75A	Optional 1" Extension Flange
EAC0058D08A	Pressure Disk	EAA0346J76A	Optional 2" Extension Flange

TECHNICAL SUPPORT 1-800-225-5786

WARNING
• Read and follow all safety messages and instructions
• Read safety precautions on pages W1 to W4

WHEEL BALANCING: MOTORCYCLE WHEEL BALANCER AND TIRE CHANGER

EEWB333A

EEWH310B

Hand Spin Wheel Balancer

Specifications	EEWB333A
Accuracy, oz	0.25
Cycle Time (seconds)	6–10
Shaft Measuring Speed	100
Shaft Capacity, lb	70
Rim Diameter Range, inches	8–30
Rim Width Range, inches	3–20
Tire Diameter, inches	42
Rim Width Range, inches	3–20
Electrical Requirements	115V AC, 1ph, 60Hz, 2A
Machine Weight, lb (kg)	174

EEWB333A Motorcycle Wheel Balancer

- Quickly, easily and accurately balance motorcycle tire and wheel assemblies
- Handspin operation features static and dynamic balancing modes
- Features five ALU modes to place weights in proper location on multiple wheel configurations
- Split weight mode to hide weights behind spokes
- Stadium weight tray is curved to access keypad and weight pockets easily
- Multiple operator feature allows several users to quickly recall settings
- Virtual plane imaging technology for unsurpassed accuracy

Motorcycle Tire Changer

Stock No.	EEWH310B
Outside Clamping Range, inches	8–21†
Inside Clamping Range, inches	12–20
Rim Width, max. inches	13†
Tire Diameter, max. inches	40
Tire Width, max. inches	10/13*
Bead Breaking Width, max. inches	13
Bead Breaking Force, lb @ 150 PSI	3,300
Air Requirement, PSI	140–170 PSI @ 8.5 CFM
Voltage Requirements	120V 60Hz, 20A
Net Weight, lb	306
Overall Dimensions, inches	67 x 30 x 28

†10"–18" car, 8"–15" scooter, 15"–21" motorcycle
*13" car, 10" motorcycle

TECHNICAL SUPPORT 1-800-225-5786

EEWH310B Motorcycle Tire Changer

- Configured to change tires on most motorcycle wheels
- Raised clamping jaws to allow for hub clearance
- Optional safety restraint arm EAA0270J11A provides additional tire/wheel retention when seating beads

EAA0255J33A 40 mm Shaft Upgrade Kit

- Optional kit contains cones, 40 mm shaft, quick nut and pressure disk to convert the EEWB333A to balance automotive tire and wheel assemblies

Balancer Pin Plate Sets

- Pin plate kits are a system of plates and studs to center and load the wheel at the lug-stud holds
- Mirrors mounting wheel to the vehicle's hub and minimizes imbalance errors
- Avoids damage to plastic-clad wheels by avoiding contact with the outer surface of the wheel face
- Applies even pressure to lug-stud surfaces and locates the wheel on center of balancer shaft
- Avoids misalignment by improper and inconsistent mounting on the balancer
- When mounted, the plate and stud system places an even clamping force on the rim and centers the assembly on the balancer

Stock No.	Description	EEWB3-1A
EEWB3-11A	Adaptor Plate #1	•
EEWB3-120A	Adaptor Plate #2	•
EEWB3-13A	Adaptor Plate #3	•
EEWB3-140A	Adaptor Plate #4	•
EEWB3-02A	Style B Stud	8X
EEWB3-03A	Style C Stud	6X
EEWB3-050A	Style E Stud	8X

TECHNICAL SUPPORT 1-888-621-8767

EEWB3-055 Extra Long E-Stud
- Additional length for E style custom wheels

EEWB3-5 Balancer Flange Spacer
- Provides added clearance for larger cones and collets
- Use with EEWB3-4 collet set

EEWB3-4 Collet Set, 9pc
- Precision-machined and sized collets fit perfectly into the rear pilot center of plastic-clad wheels
- Collets are shallow in length, not to interfere with the plastic tabs
- Recommended to be used in conjunction with a pin plate on the wheel's outer side

EAK0309J20A Storage Stand
Storage stand for the plates and pins in the EEWB3-1A.

EEWB3-6 Balancer Plate Pin Kit
- Fits a variety of trucks such as Ford® F350®, F450® and F550® as well as GM®, GMC®, Isuzu®, Mitsubishi® Fuso® and Dodge® Sprinter®
- Some applications may require EEWB3-11A Adaptor Plate #1 (sold separately)

EAA0255J33A 40 mm Shaft Upgrade Kit
- Converts older Snap-on® balancers with 28.5 mm shaft to 40 mm (EEWB304A and B, EEWB305A and B)

EEWB3-75 Truck Step Cone Kit
- Contains two cones and back-up disk for trucks
- Cone #1 is 6.190"-6.972" (157–77 mm)
- Cone #2 is 5.059"-5.683" (128–143 mm)
- Use only on vehicles that center the wheel on the hub and not studs

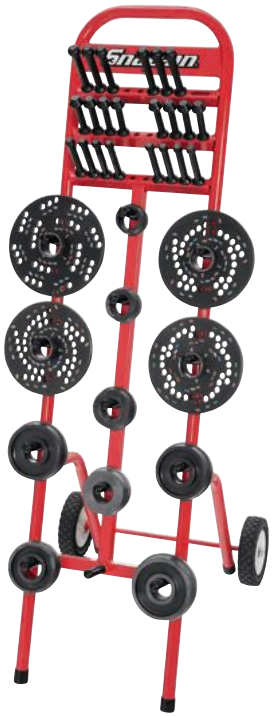

EEWB3-1A, EEWB3-4, EAK0309J20A



KRD401A

WWPR13A

WWH13LG

WWH13SM

Wheel Balancing Accessories

KRD401A Wheel Weight Cabinet
- Storage for a wide assortment of wheel weights
- 36 compartments, each measuring 3 7/8" x 3 7/8"

WWPR13A Right Angle Wheel Weight Pliers
- Easily removes and replaces wheel weights as well as cutting and crimping
- Made of heat-strengthened steel
- Comfortable vinyl handle grips and replaceable hard plastic hammer tip

WWPR13-3 Replacement Hammer Tip
- For WWPR13A

WWH13LG Wheel Weight Hammer (Blue-Point®)
- Designed for use on steel and zinc clip-on wheel weights
- Soft hammer face to avoid scratches and dings
- Solid Nuplaglas® handle resists most shop chemicals and has a nonslip grip
- Replaceable cold rolled steel hook assembly to ensure long service life
- Works best on US brands that use traditional dimension dismounting holes

WWH13SM Wheel Weight Hammer *(Blue-Point)*
- Designed for use on steel and zinc clip-on wheel weights
- Soft hammer face to avoid scratches and dings
- Solid *Nuplaglas* handle resists most shop chemicals and has a nonslip grip
- Replaceable cold rolled steel hook assembly to ensure long service life
- Specially designed small diameter dismounting hook is used on wheel weights with smaller dimension dismount holes

TIRE CHANGERS

Snap-on® Tire Changers come in a variety of models to fit each individual shop's needs. The Tilt-Back Tire Changer handles a variety of tire sizes and configurations, with a tower that tilts back to allow for wider tire and wheel assemblies and features a Pneumatic Bead Assist arm to assist the operator when mounting low profile tires. The Swing Arm Tire Changer has basic features for a shop that is new in the tire business or as an additional unit in a high-volume shop.

EEWH312A

EEWH311B

EEWH326A

Common to EEWH326A:
- Two-Speed turntable offers a forward speed of 14 RPM to provide faster throughput when mounting initial bead and 7 RPM for precise speed control
- Integrated laser guided mount/dismount head precisely locates the edge of the wheel minimizing damage

Common to EEWH311B and EEWH326A:
- Tilt-Back design speeds setup and allows for a 15" tire and rim clearance
- Pneumatic Bead Assist provides user with additional capability when servicing low-profile tires with stiff sidewalls
- Pneumatic cylinder raises and lowers each of the specialized tools into place
- Bead Depressor pushes tire sidewall into the drop center and follows the tire as the turntable rotates for easier mounting
- Top Roller also helps keep the bead in drop center
- Top Roller allows user to lubricate top bead prior to dismounting tire
- Wheel Depressor applies downward pressure during initial clamping
- Power Lifting Disc lifts tire off the lower bead of rim to aid user during the dismount process

Common to all models (EEWH326A, EEWH311B and EEWH312A):
- Three-position bead breaker covers multiple applications such as SUVs and light trucks that have taller sidewalls
- Bead seating jets are integrated into clamping jaws and force additional air into tire during inflation
- Plastic protection on mount/dismount head and clamping jaws prevents accidental rim damage
- Surge tank delivers additional air during the bead seating process
- Air lubricator and regulator supports corrosion protection for rust-proof air cylinders and valves
- High-torque 1 HP turntable motor minimizes turntable stalling
- Dual clamping cylinders provide even clamping force on jaws to reduce wheel slippage
- Two-year warranty and five years on transmission

Type	EEWH312A	EEWH311B	EEWH326A
Pneumatic Bead Assist	Optional	Standard	Standard
Turntable Speed (RPM)	7CW/7CCW	7CW/7CCW	7+14CW/7CCW
Outside Clamping Range (in)	10–20	10–24	10–28
Inside Clamping Range (in)	12–22	12–24	12–24
Rim Width (max, in)	12	15	15
Tire Diameter (max, in)	40	40	40
Tire Width (max, in)	13	15	15
Bead Breaking Force (lb @ 150 PSI)	3300	3300	3300
Air Requirements (PSI)	140–170 @ 8.5 cfm	140–170 @ 8.5 cfm	140–170 psi @ 8.5 cfm
Voltage Requirements	115V 60Hz, 1ph 20A	115V 60Hz, 1ph 20A	230V, 60Hz, 1 phase, 12A
Net Weight, lb (kg)	442	750	766 (347)
Overall Height x Width x Depth (in)	68 x 41 x 49	69 x 41 x 55	69 x 41 x 55

TECHNICAL SUPPORT 1-800-225-5786

Tire Changer Accessories

	Stock No.	Description	EEWH312A	EEWH311B	EEWH326A
	EAA0351G94A	8" ATV Adaptors (4 each)	opt	—	—
	EAA0351G93A	6" Clamping Adaptors (4 each)	opt	—	—
	EAA0351G92A	Motorcycle Adaptors (4 each)	opt	—	—
	EAA0329G53A	8"–24" Motorcycle/ATV Adaptors (4 each)	—	opt	opt
	EAA0328G91A	4" Clamping Adaptors (4 each, use with EAA0304G80A)	—	opt	std
	EAA0304G80A	4" Offset Mount/Dismount Head	—	opt	std
	EAA0247G20A	Composite Mount/Demount Head	opt	opt	opt
	EAA0247G15A	Protective Insert for Mount/Dismount Head (10 each)	std	std	std
	EAA0351G90A	Jaw Protectors, covers jaw – Long (4 each)	opt	—	—
	ST4027645	Jaw Protector, covers jaw (4 each)	—	opt	opt
	EAC0087G48A	Jaw Protector, original replacement (1 each)	—	std	std
	5-14126A	Paste Brush	std	std	std
	8-03229A	Paste Bucket	std	std	std
	EAA0247G04A	Protective Cover (for tire lever EAA0247G02A)	opt	opt	opt
	EAA0304G14A	Wave Tire Tool	opt	opt	opt
	EAA0247G14A	Motorcycle Bead Breaker Blade	opt	opt	opt
	EAA0304G15A	Protective Cover for Bead Breaker Shovel	opt	opt	opt
	EAA0270J11A	Safety Restraint Arm	opt	—	—
	EAA0304G72A	Safety Restraint Arm	—	opt	opt
	EAA0329G33B	Pneumatic Bead Assist	opt	—	—

EEWH315A High Performance Tire Changer (Air Deluxe)
- Air motor driven turntable and swing arm style
- Outside clamping range 10"–24"
- Maximum rim width 13"
- Includes pneumatic bead assist

WARNING
• Read and follow all safety messages and instructions
• Read safety precautions on pages W1 to W4

TIRE AND WHEEL: TIRE PRESSURE MONITORING SYSTEM

Snap-on® Tire Pressure Monitoring tools work with most foreign and US systems that are both direct and indirect. Whether it is an automotive repair shop, tire store, body shop, fleet repair facility or lube bay, these TPM tools are essential to servicing the customer's needs.

TPMS3

TPMS3-2

TPMS3-3

Troubleshooter quickly diagnoses TPM Systems

Vehicle-specific relearn procedures

TPM Sensor Information Display

TPMS Testers

TPMS3 Tire Pressure Sensor System Tool Kit

- Test TPM Sensors: Diagnose sensors and determine whether or not a replacement is needed. Also captures sensor data and displays PSI, ID, temperature and battery status
- Print Sensor Information: Allows user to print sensor information using WebTPM software (included) and PC
- Relearn TPM Vehicle Systems: Provides vehicle-specific reset procedures when vehicle tires have been rotated
- Sensor Replacements: Features vehicle-specific prompts that guide the TPM system relearn following sensor replacement
- Tire Rotations: Provides quick registration of new sensor locations after tire rotation
- Tests key FOBs for proper signal strength and battery condition
- Includes replacement TPM sensor part number lookup for OEM and aftermarket sensors
- Complete with docking/charging station
- Built-in Lithium Ion rechargeable battery

Software Updates

- TPMS3 includes webTPM portal that installs on PC or laptop and administers software updates
- Registration of tool through webTPM provides 12 months of access to new software updates as they become available
- After the first 12 months, TPMS3U update will allow software updates and additional 12-month time period
- Additional functionality of webTPM includes Print Sensor Information and the ability to add optional software such as TPMS3PRG Programmable Sensor add-on pack

TPMS3-2 OBDII Connector

TPMS3-3 Magnet

TPMS3-4 USB Cable

TPMS3BOX

TPMS3U TPMS3 Software Update

- Up to and including the currrent model year vehicle coverage: sensor testing, relearn procedures and ECU Sensor ID registration
- Troubleshooter menu option assists technician diagnosing the TPM system
- Improved menu navigation with guided symptom-based TPM sensor tests and system relearn procedure
- Added ECU unlock for *Toyota*, *Lexus* and *Scion* vehicles that have a TPMS dash-reset button
- Part number lookup for OEM and aftermarket sensors
- Software purchase allows user to access new updates for a period of 12 months

TPMS3PRG Programmable Sensor Add-on Package

- Use the TPMS3 to program aftermarket Tire Pressure Monitoring System (TPMS) programmable sensors
- Replace a sensor with low battery life or one that is non-functioning
- Reduce sensor inventory costs – one sensor covers multiple vehicle applications
- Use to install a duplicate set of sensors in a summer/winter set of tires
- Kit consists of a 2GB Micro SD card along with registration certificate
- Registration certificate contains a code that is entered into webTPM and allows access to sensor programming functionality
- Requires TPMS3 software version CS2-02 or newer to install TPMS3PRG
- TPMS3PRG is a one-time activation to program aftermarket TPM sensors

The TPMS3PRG works with the sensor types listed below: EZ-sensor® , Alligator sens.it®, NAPA® Echlin® Clone-able, Standard® Clone-able, Intermotor® Clone-able, Dorman® DiRECT-FIT™, OEC ID Copy (Orange)

TECHNICAL SUPPORT 1-888-621-8767

TPMS Tools

TPMS3BOX TPMS Sensor Bench Tester

- Tests TPMS sensors without having to mount in a tire/wheel assembly
- Pressurizes sensor to simulate actual conditions
- Used with Tire Pressure Monitoring System Tools
- Saves time in mounting/dismounting tire

TPMS2

TPMS Testers

TPMS2 Tire Pressure Monitor Tool

- Simple to use activation and resetting of TPM sensors and systems
- Vehicle selection interface quickly configures the TPMS2 for fast sensor activation and testing
- Interactive PC Software included to display vehicle specific TPMS service procedures and sensor specific information
- Wireless communication capability via Bluetooth® technology between the TPMS2 and PC for information transfer or with supplied USB cable
- Kit includes TPMS2 Tool, PC software and USB Cable Note: Requires *Bluetooth*-capable PC for wireless communication

TPMS2U TPMS2 Software Update

- Provides 6 months access to update TPMS2

TECHNICAL SUPPORT 1-888-498-7671

TPMS2-5

TPMS Testers

TPMS2EZ EZ-Sensor® Programming Module Update Kit

- Provides the ability to program *EZ-Sensor* using TPMS2

TPMS2-5 TPMS2 Charging Station

- Charges TPMS2 when not in use

QDTPMS

VSC4KT

TPMS Tools

QDTPMS Valve Core Torque Tool

- Specifically designed to be used as a core remover and precise installer for TPMS tire valve to eliminate risk of damaging expensive TPMS sensors
- Preset to 4 in-lb to prevent over- or under-torquing
- Preset torque setting also helps prevent valve core leaks that lead to low tire pressure and TPMS alerts

VSC4KT TPMS Valve Stem Cap Set

- Quickly evacuate air without removing valve cores
- Replace a standard sized valve cap with this tool, will depress the valve stem for rapid deflation
- Return your wheels to the original position without resetting the TPMS
- Caps are clearly marked for easy identification for the reinstall
- Blue anodizing makes caps easily visible on most rims or tires
- Knurling provides sure grip even in greasy situations
- Back side of the tool allows for valve cap storage while the tools are in use
- Vinyl holder included to keep valve stem caps together when not in use
- Kit includes VSC4KT-1, VSC4KT-2, VSC4KT-3 and VSC4KT-4 Valve Stem Caps

WARNING • Read safety precautions on pages W1 to W4

TIRE AND WHEEL: TIRE PRESSURE GAUGES

TGIFS1

TIF160

TPGDL1000B

TPGIF1600A

TIFHD160

Inflators

TGIFS1 Tire Gauge Inflator
- Snap-on® exclusive design
- Heavy duty billet machined aluminum body
- Dual swivel point hose for ease of use
- 20–160 PSI range
- Modular design for easy replacement of worn parts
- Double sealed scale avoids contamination from air supply
- ±1% accuracy

TIF160 Tire Pressure Gauge/Inflator
- 1% accuracy allows for use on vehicles equipped with TPMS sensors
- Shorter hose and body length make this gauge ideal for use on cars and light trucks
- Rugged dial and plunger style mechanism preserve gauge accuracy when dropped
- Stainless-steel braided hose
- 6–160 PSI, 60–1100 kPa
- Lifetime warranty

TPGDL1000B Digital Tire Pressure Gauge/Inflator (Blue-Point®)
- Reads in 0.1 PSI increments, 5–150 PSI
- Rugged, braided stainless-steel hose
- Back-lit display, with PSI, kPa, bar and kg/m^2
- Dual foot and clip-on chuck included with 1/4" threads for easy use with any open chuck
- 1/4" NPT air inlet fitting
- Rubber body prevents damage when dropped
- Replacement batteries and O-rings included

TPGIF1600A Tire Gauge and Inflator *(Blue-Point)*
- 10–120 PSI in 2 lb increments
- 1/4" FNPT air inlet fitting
- Swiveling hose for easy gauge positioning
- Zinc body with heavy duty brass valves
- Easy-to-read sight glass featuring PSI and kPa readings
- ±1% accuracy

TIFHD160 Truck Tire Inflator *(Blue-Point)*
- Inflate heavy duty truck tires quickly and safely
- Gauge measures from 6–160 PSI (40–1100 kPa)
- Includes 14" dual foot budd chuck with locking threads
- High quality 48" extended rubber hose (Tested to 300 PSI)
- 1/4" NPT brass fitting for inlet air connection
- 360° swiveling gauge for easy reading
- Rubber gauge guard for added shock resistance
- Rugged geared gauge construction for added durability
- 48" hose and chuck allow a tire technician to stand outside of the trajectory zone as noted in OSHA1910.177 standards, servicing multipiece and single piece rim wheels. This standard requires a “sufficient length of hose” exist between the chuck and valve

TPGD150

TPGDL150

Digital Tire Pressure Gauges *(Blue-Point)*

TPGD150 Digital Tire Pressure Gauge
- Ranges from 5–150 PSI in 0.5 increments
- Flexible 11" braided hose with dual foot chuck helps access hard-to-reach tire valves
- Black ribbed gauge guard provides a sure gripping surface and helps protect the gauge if dropped
- Auto shutoff extends battery life
- 1% accuracy

TPGDL150 Digital Tire Pressure Gauge
- Backlit for easier measurement reading
- Auto shutoff extends battery life
- 5–150 PSI reading
- Shockproof rubber guard to prevent damage when dropped
- Molded finger grips for added comfort
- Heavy die cast faceplate
- Includes steel belt clip and batteries
- ±1% accuracy

Dial Type Pressure Gauges

TPRG60 TPMS/Racing Tire Gauge
- Ideal for applications requiring precise readings like TPMS gauge testing and performance driving
- PowerFlex™ movement is both durable and accurate
- ±1% accuracy

TPG15 Low Pressure Tire Gauge
- Low pressure gauge for ATVs, lawnmowers, motorcycle fork tubes and more
- Unique design offers superior shock resistance: movement from socket is isolated, reducing effects of shock
- Silicone dampened gears and enhanced vibration dampening design cushion movement for extended gauge service
- Clear and concise, easy-to-read 1–15 PSI gauge displays in 1/4 PSI increments
- ±1% accuracy

PG160 Dial Type Pressure Gauge (Blue-Point®)
- Calibrated in 1 PSI increments from 10–160 PSI
- 2 1/2" diameter dial gauge with shock-resistant gauge movement
- 12" flex hard-to-reach valves (16" with chuck)
- Bleeder valve to relieve excess pressure to achieve proper inflation
- Dual foot chuck 1% accuracy

PG60 Dial Type Pressure Gauge *(Blue-Point)*
- 12" flex hose and bleeder valve
- 1% accuracy
- Swivel angle chuck
- Dual scale pressure range – 60 PSI, 410 kPa
- Ideal for automobile and light truck service

Best results when tire gauge is used in the middle of pressure scale
* 1% accuracy = 1% of pressure scale

TPRG60

TPG15

PG160

PG60

Pencil Tire Pressure Gauges

PGP20 Tire Pressure Pencil Gauge
- 20 PSI pencil gauge for low pressure applications
- 0.5 PSI accuracy for the full range of scale
- Laser engraved barrel
- Full metal body construction
- Pocket clip holds gauge securely in pocket
- Ideal for ATVs and riding mowers

PGPS50GB Master's Choice Pencil Gauge with Wooden Box
- Durable brass construction promotes longevity and resists corrosion
- ± 1% accuracy exceeds ANSI® standards and allows for use on vehicles with TPMS sensors
- Dual scale measures from 5–50 PSI and from 34.4 kPa–344.7 kPa
- The solid maple box protects and showcases this high quality gauge

PGPS50 Master's Choice Tire Pressure Pencil Gauge
Tire pressure gauge only

PGPS50-BOX Master's Choice Box (solid maple)
Wooden box only

Best results when tire gauge is used in the middle of pressure scale
Note: 1% accuracy = 1% of pressure scale

PGP20

PGPS50GB

PGPS50

WARNING
• Do not exceed rated pressure
• Read safety precautions on pages W1 to W4

TIRE AND WHEEL: TIRE PRESSURE GAUGES

TGS1

PGP120

PGP45LQ

PGP50

PGPL150

Pencil Tire Pressure Gauges

TGS1 Sight Glass Test Gauge
- Gauge is accurate enough to use for TPMS applications
- Rugged sight glass design for better durability and readability
- 1% Master Gauge Accuracy, with certificate of accuracy included
- Durable billet machined 6061-T6 aluminum body
- Dual Foot Budd Chuck
- 10–160 PSI
- Unique comfort grip for easy use
- Can be calibrated in the field (instruction included)

PGP120 Pressure Gauge (Blue-Point®)
- Calibrated in 2 PSI increments from 10–120 PSI and in 10 kPa increments from 100–800 kPa
- Chrome body
- 1% gauge accuracy
- 5 3/4" long

PGP45LQ Air Liquid Pressure Gauge *(Blue-Point)*
- Calibrated in 1 PSI increments from 5–45 PSI
- Can be used on any standard or liquid solution-filled tires
- Spring retracts into gauge, causing pump action to expel tire liquid
- Chrome body
- 1% gauge accuracy
- 5 15/16" long

PGP50 Pressure Gauge *(Blue-Point)*
- Calibrated in 1 PSI increments from 5–50 PSI and 5 kPa increments from 50–350 kPa
- Chrome body
- 1% gauge accuracy
- 5 3/4" long

PGPL150 Tire Gauge *(Blue-Point)*
- Calibrated in 2 PSI increments from 10–150 PSI
- Straight dual foot is well suited for Budd truck style tires
- 30° angle reverse foot assists in hard-to-reach areas
- Includes hanging clip
- Chrome body
- 1% gauge accuracy
- 12" long

AIR CHUCKS

GA359

GA356B

GA460B

GA296B

GA358

YA173B

TPDF14

Closed Air Chucks

For use on air lines only. Do not use on inflators.

GA359 Dual Foot Air Chuck
- Easily access hard to reach inner tandem wheels
- Tilt lock feature locks onto the valve
- 30° reverse angle chuck can be used on outside tires
- Screwdriver style handle
- Thread size of 1/4" NPT
- Overall length of 12"

GA356B Dual Foot Air Chuck *(Blue-Point)*
- 1/4"-18 female NPT with 5/8" hex nut
- Straight foot works well on Budd style wheel rims
- 30° angle reverse foot is helpful in limited access situations
- 6 1/2" long

GA460B Dual Foot Air Chuck *(Blue-Point)*
- 1/4"-18 female NPT
- 6 1/8" long

GA296B Angled Air Chuck *(Blue-Point)*
- 1/4"-18 female NPT
- Rubber gasket included

GA358 Air Chuck
- Screwdriver style black handle
- Thread size of 1/4" NPT
- Overall length of 7"

YA173B Clip-on Style Angled Air Chuck *(Blue-Point)*
- 1/4"-18 female NPT
- Spring loaded, trigger operated valve stem clip
- Maximum operating pressure is 200 PSI

TPDF14 Long Reach Dual Foot Air Chuck *(Blue-Point)*
- 14" Long reach dual chuck
- Straight on chuck with 30° reverse chuck
- All metal components
- Work well for reaching dual wheel truck tires
- Compatible with Snap-on® and *Blue-Point* inflators

GAOC356

GAOC460

TPDFOC14

Open Air Chucks (Blue-Point®)

For use on inflators only. Do not use on air lines.

GAOC356 Dual Foot Air Chuck
- 1/4"-18 female NPT with 5/8" hex nut
- Straight foot works well on Budd style wheel rims
- 30° angle reverse foot is helpful in limited access situations
- 6 1/2" long

GAOC460 Dual Foot Air Chuck
- 1/4"-18 female NPT
- 6 1/8" long

TPDFOC14 Long Reach Dual Foot Air Chuck
- 14" Long reach dual chuck
- Straight on chuck with 30° reverse chuck
- All metal components
- Work well for reaching dual wheel truck tires
- Compatible with Snap-on® and *Blue-Point* inflators

Maximum rating on all *Snap-on* air chucks is 150 PSI

TR107A

TR108

TR109

TR117O

VT1A

QDTPMS

GA143B

VT14

Valve and Stem

TR107A Valve Core Tool
- For installation and removal of standard valve cores
- Screwdriver style handle
- 6 1/4" long

TR108 Valve Core Tool
- Similar to TR107A
- 4 3/4" long

TR109 Valve Core Tool
- Use to remove or replace valve cores on A/C systems (large bore)
- 6 3/4" long

TR117O Valve Core Remover/Installer Tool
- Valve core remover/installer tool
- 6 1/4" long

VT1A Valve Stem Inserter
- Simplify installation of valve stem in tubeless tire rim
- Notched shank to accommodate various rim styles
- Comfortable screwdriver type handle

QDTPMS Valve Core Torque Tool
- Specifically designed to be used as a core remover and precise installer for TPMS tire valve to eliminate risk of damaging expensive TPMS sensors
- Preset to 4 in-lb to prevent over- or under-torquing
- Preset torque setting also helps prevent valve core leaks that lead to low tire pressure and TPMS alerts

GA143B Valve Core and Stem Tool *(Blue-Point)*
- Four-function tool inserts and removes cores, taps inner stem threads and chases outer threads
- 1 7/8" x 13/16"

VT14 Universal Valve Core Tool *(Blue-Point)*
- Double-ended bit removes and installs large and small valve cores
- Reverse the double-ended wrench in the tool body to fit both large and small valve cores
- Use the cup end to remove valve caps

GA599A

TDG1

Tread Depth Gauge

GA599A Tread Depth Gauge
- Measures to a depth of 1" in 1/32" increments
- Plastic body with aluminum probe and sliding gauge
- Includes pocket clip

TDG1 Tread Depth Gauge
Same as the GA599A but the gauge is color coded for easy tread wear diagnosis

WARNING
- Do not exceed rated pressure
- Read safety precautions on pages W1 to W4

TIRE AND WHEEL: WHEEL TORQUE TOOLS

BTQS1000

BTQS600

BTQS500

Torque Sticks/Standard Duty

- Strobe marks stop turning at precisely the right torque
- Engineered for rugged professional environments
- Manufactured with heat-treated Swedish spring steel in a solid one-piece design
- Sticks are individually packaged
- Sets come with a color-coded torque chart showing the correct stick for nearly every domestic and import vehicle
- Lifetime guarantee

Stock No.	Size, mm	Color	Torque Limit, ft-lb	Drive, inches	Set Contains: BTQS1000	BTQS600	BTQS500
BTQS12A	21	Brown	100	1/2	•		
BTQS12AA	22	Orange	75	1/2		•	
BTQS12B	21	Light Brown	80	1/2	•		•
BTQS12BB	21	Charcoal	147	1/2	•		•
BTQS12C	19	Gray	100	1/2	•		•
BTQS12D	21	Black	60	1/2			
BTQS12E	19	Blue	80	1/2	•		
BTQS12EE	22	Turquoise	140	1/2	•		•
BTQS12F	19	Yellow	65	1/2		•	
BTQS12G	17	Red	80	1/2		•	
BTQS12H	17	Green	55	1/2		•	
BTQS12HH	22	Medium Brown	110	1/2			
BTQS12I	22	White	120	1/2	•		•
BTQS12K	17	Light Yellow	113	1/2		•	
BTQS12KK	21	Red-Orange	110	1/2			
BTQS12MM	17	Off White	90	1/2		•	
BTQS12NN	19	Light Tan	90	1/2			
BTQS12OO	19	Quartz	120	1/2			
BTQS12T	24	Light Green	140	1/2	•		
BTQS12UU	14	Mud	80	1/2			
BTQS12XX	21	Light Purple	160	1/2	•		
BTQS12Y	22	Light Blue	100	1/2	•		

BTQSWC13 Wall Chart
Color wall chart for service bays

Sets shown include storage case

BTQSHD400

Torque Sticks/Heavy Duty

Stock No.	Size, inches (mm)	Color	Torque Limit, ft-lb	Drive, inches	Set Contains: BTQSHD400
BTQSHD34114	1 1/4	HD Red	250	3/4	
BTQSHD3433M	(33)	HD Brown	475	3/4	
BTQSHD1114	1 1/4	HD Red	250	1	•
BTQSHD133M	(33)	HD Brown	475	1	•
BTQSHD1112	1 1/2	HD Black	475	1	•
BTQSHD11316	13/16	HD Yellow	475	1	•

Set shown includes storage case

TSS2KT

Torque Sticks/Special Application

Stock No.	Size, mm	Color	Torque Limit, ft-lb	Set Contains: TSS2KT
TSS2TT	22	Pink	150	•
TSS2QQ	22	Salmon	95	•

305TSKTA

Torque Extensions

- Help eliminate overtorqued lug nuts, broken or damaged studs and distortion of rotors, drums and wheels
- Color-coded low-friction sleeve for quick reference
- Cold formed special alloy steel for greater accuracy and strength
- 1/2" male and female square drive for use with appropriate impact socket
- Female square drive designed for improved retention on impact wrenches
- Male square drive has friction ring for secure socket retention

Stock No.	Color	Torque Limit, ft-lb	Set Contains: 305TSKTA
TSKT65A	Yellow	65	•
TSKT80A	Blue	80	•
TSKT100A	Gray	100	•
TSKT120A	White	120	•
TSKT140A	Teal	140	•

Set shown includes storage case

Lug Nut Sockets

LSR1500 Standard/Twist Wheel Flip Socket Set
- Five sockets for use on the most popular lug nut sizes (17 mm, 19 mm, 3/4", 21 mm, 13/16" and 7/8")
- Six-point Flank Drive® wrenching system at one end and a six fluted twist socket for removal of damaged wheel lugs at the other end
- Flip the socket when encountering a damaged head
- Knurling identifies twist socket end
- Sockets and 3 1/2" extension are all 1/2" drive for use with hand drivers or impact wrenches
- Black oxide finish
- Storage case

LSR1500

LSR2000 Thinwall Wheel Flip Socket Set
- Covers the four most popular lug nut sizes
- (3/4" and 13/16", 19 mm and 21 mm) *Flank Drive* wrenching configuration
- 1/2" square drive located at center of socket
- Use with hand driver or impact wrench
- Includes LSR1150 and LSR1250 lug nut sockets and 3 1/2" extension in a custom case
- Black industrial finish

LSR2000

LSR2000PLUS Lug Nut Flip Socket Set
- Three flip sockets in 3/4" and 13/16", 7/8" and 15/16" plus 19 mm and 21 mm
- All sockets are 3" long
- 1/2" square drive located at center of socket
- Use with hand driver or impact wrench
- Custom case
- Black industrial finish on all components
- Requires use of optional LSR1000EXT extension (not included)

LSR2000PLUS

LSR1150 Thinwall Wheel Flip Socket
- Thinwall wheel flip socket covers 3/4" and 13/16" wheel lug sizes
- Use with hand driver or impact wrench
- 3" long

LSR1150

LSR1250 Thinwall Wheel Flip Socket
- Thinwall wheel flip socket covers 19 mm and 21 mm wheel lug sizes
- Use with hand driver or impact wrench
- 3" long

LSR1250

LSR2500 Lug/Lock Flip Twist Socket Set
- Quickly and easily remove damaged wheel lugs (six flute end) or damaged wheel locks with damaged or lost keys (12 flute end)
- 1/2" square drive located at center of socket
- Use with hand driver or impact wrench
- Includes LSR2501 and LSR2502 lug/lock sockets and 3 1/2" extension in a custom case
- Black industrial finish

LSR2500

LSR2501 Lug/Lock Flip Twist Socket
- 3/4" – 19 mm twist socket quickly and easily removes damaged wheel lugs (six flute end) or damaged wheel locks with damaged or lost keys (12 flute end)
- Use with hand driver or impact wrench
- Black industrial finish: 2 5/8" long

LSR2501

LSR2502 Lug/Lock Flip Twist Socket
- Same as LSR2501 except in 7/8" size

LSR2503 Lug/Lock Flip Twist Socket
- Same as LSR2501 except in 17 mm size

LSR2502

LSR2500PLUS Lug/Lock Flip Twist Socket Set
- Quickly and easily remove damaged wheel lugs (six flute end) or damaged wheel locks with damaged or lost keys (12 flute end)
- 1/2" square drive located at center of socket
- Use with hand driver or impact wrench
- Includes LSR2501, LSR2502 and LSR2503 lug/lock sockets in a custom case
- Black industrial finish
- LSR1000EXT is optional 3" extension for the set

LSR2500PLUS

LSR1450 Thinwall Wheel Flip Socket
- Covers 17 mm and 19 mm wheel lug sizes
- *Flank Drive* wrenching configuration
- 1/2" square drive located at center of socket (requires optional extension LSR1000EXT)
- Ideal companion to LSR2000 and LSR2000PLUS
- Black industrial finish
- Major O.D.: 1.03" (26.3 mm) – Minor O.D.: 0.94" (23.9 mm)
- Length: 3" (76.2 mm)

LSR1450

LSR1580 Thinwall Lug Nut Flip Socket
- 21 mm and 22 mm socket size: 3" long
- Use with hand driver or impact wrench
- Requires use of optional LSR1000EXT extension
- 1/2" square drive located at center of socket

LSR1580

LSRM2000 Metric Flip Socket Set
- Includes LSR1580 and LSR1450 sockets plus LSR1000-EXT 3" extension
- Designed for 2005 and later vehicles
- Includes 17 mm, 19 mm, 21 mm and 22 mm sizes

LSR2000

Applications: Dodge® Pickup 1500, *Dodge* SRT-10, Honda® Odyssey®, Land Rover® L3, Range Rover® and Sport, Lexus® LX470 and Toyota® Land Cruiser® vehicles

LSR1560 Flip Socket
- 7/8" and 1" socket size: 3" long
- Use with hand driver or impact wrench
- Expands LSR2000 and LSR2000PLUS sets
- Requires use of LSR1000EXT extension (not included)
- 1/2" square drive located at center of socket

LSR1560

Applications: (7/8") Chevy®, GMC® vans, *Dodge* 1500 Ram Pickup, Ford® E250/350, *Ford* Super Duty, Hummer® H1, Lincoln® Blackwood®, *Lexus* LX470, *Toyota Land Cruiser*, Jaguar® XJ Series, (7/8 and 1") *Chevy/GMC* Pickups and SUVs, (1") Plymouth® 1 ton vans

LSR1570 Flip Socket
- 15/16" and 1 1/16" socket size: 3" long
- Use with hand driver or impact wrench
- Expands LSR2000 and LSR2000PLUS sets
- Requires use of optional LSR1000EXT extension
- 1/2" square drive located at center of socket

LSR1570

Applications: (15/16") *Dodge* Ram 2500, 3500, (1 1/16") Land Rover®, *Range Rover* Discovery II, *Ford* E300/350, *Ford* F300/350

⚠WARNING
- Read and follow all safety messages in instructions
- Check final torque on lug nuts with a torque wrench
- Read safety precautions on pages W1 to W4

TIRE AND WHEEL: LUG/RETAINING NUT SOCKETS

DW402C

2003LN

A98A

IMX32B

TSR700

TSR800

TSR1000

TSR1250

TSR1230

YA1005C

Lug Nut Sockets

DW402C Dayton Lug Nut Impact Socket
- 3/4" square drive with a 1 1/4", six-point wrench opening
- Use with socket retainers

2003LN Double Ended Lug Nut Socket Set
- Set includes A98A socket, A98M socket and IMX32B extension bar (3pc)

A98A 6-Point Lug Nut Socket
- 1/2" square drive is recessed between (two) six-point wrench openings: 3/4" and 13/16"
- Length 2 3/4"; Diameter 13/16"

A98M 6-Point Socket
- 1/2" square drive is recessed between (two) six-point wrench openings: 19 mm and 21 mm
- Length 2 3/4"; Diameter is 13/16"

IMX32B Impact Extension
- 1/2" square drive, 5/8" shank diameter; 3" long
- Snap ring locking mechanism

TSR500 Lug Nut Remover Socket (Blue-Point®)
- Use on late model OEM and aftermarket lug nuts
- Dual sided design allows use on 3/4", 13/16", 19 mm and 21 mm lug nuts
- Use with 1/2" drive impact wrench
- Fluted socket design helps remove most stubborn lug nuts
- Includes extractor punch

TSR600 Locking Lug Nut Socket *(Blue-Point)*
- 1/2" square drive is located in the center of the socket
- Use included pin to dislodge lug nut if wedged in socket
- Removes most locking lug nuts and has two-in-one flip socket design
- For use with impact wrench
- Fluted for extra grip

TSR700 Lug Nut Remover Socket *(Blue-Point)*
- Use on late model OEM and aftermarket lug nuts
- Dual sided design allows use on 7/8", 1", 22 mm and 25 mm lug nuts
- Use with 1/2" drive impact wrench
- Six flute socket design helps remove most stubborn hex lug nuts

TSR800 Lug Nut Remover Socket *(Blue-Point)*
- Use on late model OEM and aftermarket lug nuts
- Dual sided design allows use on 7/8", 1", 22 mm and 25 mm lug nuts
- Use with 1/2" drive impact wrench
- 12-flute socket design helps remove most stubborn rounded lug nuts

TSR1000 Lug Nut Socket Set *(Blue-Point)*
- Set includes TSR500 and TSR600 lug nut sockets plus YA1005-7 extractor punch
- Use TSR500 on late model OEM and aftermarket lug nuts
- Dual-sided design allows use on 3/4", 13/16", 19 mm and 21 mm lug nuts
- TSR600 removes most locking lug nuts and has a two-in-one flip socket design
- For use with 1/2" drive tools
- Fluted socket design provides extra grip

TSR1240 Lug Nut Removal Socket
- 21 mm/21.5 mm socket, use for *Chrysler* and Dodge® applications

TSR1250 Lug Nut Removal Socket *(Blue-Point)*
- Dual flip 1/2" drive impact socket design
- Removes lug nuts with missing or distorted caps
- 19.5 mm side fits distorted 19 mm chrome caps found on many GM® and Chrysler® vehicles
- 18.5 mm side fits rusted lug nuts missing chrome covers

TSR1260 Lug Nut Removal Socket
- 22 mm/22.5 mm socket, use for *Dodge* 16" – 17" aluminum wheels

TSR1270 Lug Nut Removal Socket
- 1 1/16"/27.5 mm socket, use for Range Rover® and Land Rover® applications

TSR1230 Lug Nut Removal Socket Set
- Set includes TSR1240, TSR1250, TSR1260 and TSR1270 Dual Flip sockets plus YA1005-7 Extractor Punch in custom vinyl bag
- Works great on lugs that are rusted, have missing caps or are missing caps altogether

YA1005C Locking Lug Nut Remover Kit *(Blue-Point)*
- Removes locking lug nuts and locking hubcaps on most vehicles including the new *Chrysler* hubcap locks Updated set includes new turbo lug nut socket to easily remove damaged 3/4", 13/16", 19 mm and 21 mm lug nuts
- Tapered swirl in socket bites into damaged lug nut for quick removal
- Intended for hand use only, except for turbo lug nut socket, which should be used with an impact wrench

203FLSM

SIMML210

Lug Nut Sockets (3/8" drive)

Stock No.	Square Drive, inches	Wrench size mm	Overall Length, inches
FLSM1719	3/8	17 & 19	3
FLSM2122	3/8	21 & 22	3
FLS2426	3/8	3/4 & 13/16	3

203FLSM Lug Nut Socket Set
- Includes FLSM1719 and FLSM2122 Metric Flip Lug Nut Sockets plus IMX31 Impact Extension

LMS24

Lug Nut Socket (Magazine Loading) (Blue-Point®)
- Multiple lug nut removal up to five lug nuts at a time
- Eliminates rolling or lost lug nuts and wasted motion
- Ideal for use in tire and brake shops
- Adjust type 9, 12 and 16 cu in air chambers that are equipped with 1/2"–20" threaded rod and 3/4" nut

Stock No.	Wrench Size, inches (mm)	Square Drive, inches	Outside Dia., inches	Overall Length, inches
LMS24	3/4" (19 mm)	1/2	1	5 5/16

WHM1

WHS1

WHV1

WHB1

Wheel Hangers
Allow faster, safer and easier balancing of wheels when attempting to insert and tighten wheel bolts.

Stock No.	Thread Size	Hex Size, mm	Applications
WHM1	M12 x 1.5	10	Mercedes-Benz®, BMW®, Mini, Cadillac® Catera®, *Chrysler* Crossfire
WHS1	M14 x 1.5	15	Current *Mercedes-Benz*, current Dodge® Sprinter® trucks, Freightliner Sprinter trucks from 2002–2004
WHV1	M14 x 1.5	10	Volkswagen®, Audi®, *Mercedes* ML Class, *BMW* 7 and X5 Series, Porsche®
WHB1	M14 x 1.25	10	2009–to current *BMW* and Mini vehicles

SIMML210 Lug Nut Socket
- Long socket designed to fit lug nut applications where an extension would be needed
- Flank Drive® wrenching configuration where the socket grips the fastener on the flanks/flats increasing torque by up to 15%–20%
- Forged from tough alloy steel to increase safety, impact sockets are heat treated to a lower hardness to add impact resistance and ductility
- One-piece design

LSR1000A

Wheel Lock Sockets *(Blue-Point)*

LSR1000A Wheel Lock Removal Socket Set
- Easily removes most lug nuts and wheel locks on most US and import passenger vehicles and light trucks
- Use with hand driver or impact wrench
- Some sockets cover specific GM®, Ford® and Chrysler® applications
- Set includes 11 sockets, extension and extractor punch in storage case

BRUTUS3R250D

Torque Wrench

BRUTUS3R250D US Adjustable Click Type Torque Wrench
- Tougher for longer life cycle
- Hourglass-shaped cam: less friction reduces wear, retains lubricant
- Range 50–250 ft lb
- Thrust bearing resists wear
- "Gorilla-Proof" positive stop prevents accidental disassembly (Caution: Do not wind below lowest scale mark)
- Larger, tougher load screw helps prevent damage due to impact
- High strength, sealed head
- Long handle provides more leverage
- ASME® specifications, traceable to N.I.S.T. at no charge

WARNING • Read safety precautions on pages W1 to W4

TIRE AND WHEEL: AXLE NUT SOCKETS

305SIMMY



ANS1938

GM® Axle Nut Set (1/2" Drive)

Stock No.	Size, mm	A	B	C	D	E	Set Contains: 305SIMMY
SIMM290	29	41.3	41.3	71.6	88.9	21.3	•
SIMM300	30	42.9	42.9	71.6	88.9	21.6	•
SIMM340	34	49.3	49.3	72.8	88.9	22.6	•
SIMM350	35	50.8	50.8	72.8	88.9	22.9	•
SIMM360	36	50.8	50.8	72.8	88.9	22.9	•

Axle Nut Sockets (1/2" Square Drive) (Blue-Point®)

Use with a torque wrench to service truck wheel bearing lock nuts.

Stock No.	Nominal Size	Style
ANS1937*	2 1/2"	6-Point
ANS1938	2 3/4"	6-Point
ANS1939*	2 3/8"	6-Point

*Fits special "rounded" hex nuts on Dana® axles of some Ford® trucks.

Axle Nut Sockets (3/4" Square Drive) *(Blue-Point)*

Use with a torque wrench to service truck wheel bearing lock nuts.

ANS1900B

ANS1933A

Stock No.	Nominal Size	Style	Stock No.	Nominal Size	Style
ANS1900B	2 1/8"—54 mm	6-Point	ANS1907A	3"	8-Point
ANS1933A**	59 mm	6-Point	ANS1908A	3 1/4"	6-Point
ANS1901A	2 3/32"	6-Point	ANS1909A	3 1/4"	8-Point
ANS1920A	2 1/4"	6-Point	ANS1910A	3 1/2"	6-Point
ANS1902A	2 3/8"	6-Point	ANS1911A	3 1/2"	8-Point
ANS1903A	2 3/8"	8-Point	ANS1925A	3 3/4"	8-Point
ANS1921A	2 1/2"	6-Point	ANS1927A	3 13/16"	8-Point
ANS1928A*	2 9/16"	6-Point	ANS1912A	3 7/8"	6-Point
ANS1905A	2 9/16"	8-Point	ANS1913A	3 7/8"	8-Point
ANS1904A	2 9/16"	6-Point	ANS1914A	4"	6-Point
ANS1922A	2 5/8"	6-Point	ANS1915A	4 1/8"	6-Point
ANS1923A	2 3/4"	6-Point	ANS1916A	4 3/8"	6-Point
ANS1924A	2 3/4"	8-Point	ANS1917A	4 3/8"	8-Point
ANS1926A	2 13/16"	8-Point	ANS1918A	4 7/8"	6-Point
ANS1932A	2 7/8"	6-Point	ANS1919A	4 7/8"	8-Point
ANS1906A	3"	6-Point			

*Fits special "rounded" hex nuts on *Dana* axles of some *Ford* trucks.
**For 1/2 ton vehicles with automatic locking nuts. Designed for late model *Ford* vehicles. 3/4" square drive, 59 mm nominal size. Industrial finish.

S8695C

S6146

S6109A

Four Wheel Drive Axle Nut Sockets

S8695C Axle Nut Socket 4 Lug
- 1/2" square drive: 3 3/4" long
- For 1/2 ton vehicles with manual locking nuts
- Use on front wheel bearing retaining nut on Dana 44 Series Axle used on 1959 and later *GM*®, *Ford*, Dodge®, and AMC®
- Industrial finish
- Railroad applications: use to install or remove point detector bushing found on WABCO-M23B switch machines

S6146 Axle Nut Socket 4 Lug
- For front wheel bearing retaining nut on 3/4 ton vehicles with *Dana* 60 Series axle used on *GM*, *Ford* and *Dodge* trucks
- 1/2" square drive: 3 3/4" long
- Industrial finish

S6109A Axle Nut Socket 6 Lug
- For front wheel bearing retaining nut on 3/4 ton vehicles with heavy duty suspension
- Designed for use on *GM*, *Ford* and *Dodge* trucks with *Dana* 70 Series axle
- 1/2" square drive: 3 3/4" long
- Industrial finish

SPANNER SOCKETS

ANS1929A

Spanner Sockets

For use with a torque wrench when servicing Chevrolet®, *GM* and *Ford* axles.

Stock No.	Square Drive, inches	No. of Lugs	Outside Dia., inches	Applications
ANS1929A*	3/4	6	2 5/8	Chevy®/GMC® with 5,200 and 7,200 lb axles
ANS1930	3/4	6	2 7/8	*Chevy/GMC* with 11,000 and 13,500 lb axles
ANS7269A	1/2	4	2 3/4	1985 and later *Ford* F250®/F350® with floating rear axle

**Blue-Point*

SNS2467

SNS2770

SNS3195

SNS3246

Spindle Nut Sockets

SNS2467 Spindle Nut Socket
- Remove and install four-slot axle lock nuts
- 1/2–3/4 ton Dana® 44 axle
- Socket I.D.: 2"
- 1/2" drive

SNS2770 Spindle Nut Socket
- Remove and install four-slot front axle lock nuts
- 3/4–1 ton *Dana* 44 axle
- Socket I.D.: 2 1/4"
- 1/2" drive

SNS3195 Spindle Nut Socket
- For high-shear rotating nuts
- 1/2 ton *Dana* 80 axle
- Socket I.D.: 2 3/8"
- 1/2" drive

SNS3246 Spindle Nut Socket
- Remove and install four-slot axle lock nuts
- 3/4–1 ton
- Socket I.D.: 2 1/4"
- 1/2" drive

YA6540

Axle Lock Nut Removers

YA6540 Nut Remover Kit for Toyota®/Lexus® vehicles

Axle Locks
- This tool kit prevents damage to the axle shaft threads when removing the lock nut
- Unlocks and removes the 30 mm axle nuts from *Toyota*/*Lexus* vehicles
- Kit combines a 1/2" drive 12-point special depth 30 mm impact socket and unique angle axle-nut release tool (patent pending)

YA6541 1/2" Drive 30 mm Impact Socket

YA6542 Lock Nut Release Tool



SIMDM300

IMDM320

IMDM390

SIMM360TW

Special Application Axle Nut Socket, mm (1/2" Drive)

Stock No.	Size	Style	A	B	C	D	E
SIMDM300	30 mm	12-point	42.9	42.9	71.1	88.9	21.6
IMDM320	32 mm	12-point	45.7	45.7	36.8	50.8	20.6
IMDM390	39 mm	12-point	53.8	39.6	36.8	50.8	22.3
SIMM360TW	36 mm	6-point	47.2	45.8	72.8	88.9	22.9

SIMDM300 12-Point Axle Nut Socket
- 1/2" square drive

Applications: Axle nut removal for *Toyota*: Avalon®, Camry®, Highlander® and Matrix®; *Lexus*: ES300; Pontiac®: Vibe®; VW®: Beetle, Jetta® and Golf® (1999 and later); Dodge®: *Dodge*/Freightliner® Sprinter® vans with 215 mm rear axle (2004 and newer)

Applications: Automatic transmission tail output shafts for Chrysler®: 300C and Crossfire® (2004); *Dodge*: Magnum® (2004); Jeep®: Grand Cherokee® V6 models (2005); Mercedes®: Many years of coverage

IMDM320 12-Point Metric Shallow Impact Socket

Applications: Service axle nuts on Mercedes-Benz® W140 chassis 1992–1999 SC and SL Class, Porsche® Boxster®, Cayenne® and 944 plus BMW® X3, X5 and X6 Series 2007 vehicles and later. Other uses include drive shaft nuts on *VW* Touareg® vehicles 2003 and later

IMDM390 12-Point Metric Shallow Impact Socket

Applications: Use on front axle hub of 2007 *Toyota* Tundra®

SIMM360TW Axle Nut Socket
- Thin wall design provides the extra room needed to remove and install the axle nut on Chevrolet® Sonic vehicles

WLT1

SIM540A

Wheel Hub Lock Tool

WLT1 Wheel Hub Lock Tool (Blue-Point®)
- Eliminates need for assistant to hold brake pedal while axle nuts are removed or installed
- Works on any vehicle with wheel stud bolt patterns ranging from 4 mm x 100 mm–8 mm x 170 mm
- One-piece design with incorporated cushioned grip handle for comfort and ease-of-use
- Can also be used to hold rear differential yoke on solid axle vehicles during pinion seal or bearing service, as well as many other types of machines with drive shafts, yokes and universal joints

Special Application Axle Nut Sockets, inches

SIM540A 6-Point Axle Nut Socket
- Remove or install 1996 and later *Dodge* truck axle nuts
- Use on truck and bus wheel applications
- Flank Drive® wrenching design
- 1/2" square drive

WARNING • Read safety precautions on pages W1 to W4

TIRE AND WHEEL: SHACKLE PIN

SPS10

Shackle Pin Impact Sockets

- Oval shaped wrench opening services shackle pins on International® and Kenworth® semi tractors

SPS10 Shackle Pin Socket
41/64" x 1 3/32" x 1 3/4" long.

SPS11 Shackle Pin Socket
21/32" x 1 17/32" x 1 3/4" long.

LUG/RETAINING NUT

HDLUGSET2



S6840

Heavy Duty Truck Wheel Lug Sockets

HDLUGSET1 Heavy Duty Lug Socket Set

- Includes: SIM383, SIM403, SIM483B, SIMM333, SIMM383 plus BW726A and BWD483
- Flank Drive® wrenching system
- Alloy steel combines strength and durability
- All sockets 1" square drive

HDLUGSET2 Heavy Duty Lug Socket Set

- Includes: SIM342, SIM482, SIMM332, SIMM382, SIMM412, DW402C, plus BW626A, BWD482 and BWDM412 in a PAKPB063 storage case
- *Flank Drive* wrenching system
- Alloy steel combines strength and durability
- All sockets 3/4" square drive

Lug Nut Removal Sockets (Magazine Loading)

Stock No.	Drive Size, inches	A	B	C	D	E
S6840	3/4	1 7/8	1 3/4	4 13/16	5 5/8	3/4

S6840 Magazine Loading Lug Nut Removal Socket

- Manufactured from special alloy steel, precision machined and heat-treated for optimum strength and durability
- *Flank Drive* wrenching system grips fastener on the flanks/flats increasing torque and preventing fastener from rounding and increases the life of the socket

Applications:

- Saves technician time by housing the five lug nuts as they are removed, one at a time, from the wheels on Flexi-Van Chassis trailers

General Lug Nut Usage

Lug Nut Size	3/4" Drive	1" Drive	Applications
7/8" Hex Deep	SIM282	–	Medium to light truck general usage
15/16" Hex Deep	SIM302	–	Medium to light truck general usage
1" Hex Deep	SIM322	–	Medium to light truck general usage
1 1/16" Hex Deep	SIM342	SIM343	General usage, Ford® F700 8-hole wheels
1 1/8" Hex Deep	SIM362	–	Various
1 3/16" Hex Deep	SIM382	SIM383	Various
1 1/4" Hex Deep	DW402C*	SIM403	Heavy duty Dayton® style trailers, spoke wheel type
1 5/16" Hex Deep	SIM422	SIM423	Various
1 1/2" Hex Deep	SIM482	SIM483B	Stud piloted Budd style wheel applications
1 3/4" Hex Deep	SIM562	SIM563	Construction and off-road equipment applications
13/16" Square	BW626A	BW726A	Inner nuts on Budd-style wheel applications
30 mm Hex Deep	SIMM302	SIMM303	Medium duty trucks, small 8-lug wheel sizes
32 mm Hex Deep	SIMM322	SIMM323	European truck applications
33 mm Hex Deep	SIMM332	SIMM333	General hub piloted wheel applications
35 mm Hex Deep	SIMM352	–	Import truck applications
36 mm Hex Deep	SIMM362	–	Import truck applications
38 mm Hex Deep	SIMM382	SIM383	Import truck applications
41 mm Hex Deep	SIMM412	–	Stud piloted Budd-style wheel applications
1 1/2" Hex – 13/16" Square	BWD482	BWD483	Stud piloted Budd-style wheel applications
41 mm Hex – 21 mm Square	BWDM412	–	Stud piloted Budd-style wheel applications

*Thin walled extra deep.

Budd Wheel Impact Sockets

- Six-point and square openings combined
- Use with socket retainers below
- Industrial finish

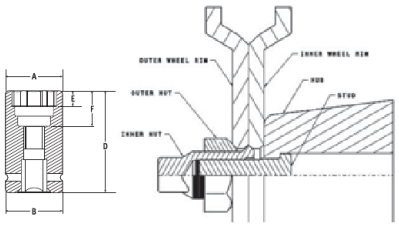

BWD482

BWDM412

BWDS483

Stock No.	Dimension A, Socket End Diameter	Dimension B, Drive End Diameter	Dimension D, Length	Dimension E, Hex Depth	Dimension F, Square Depth	Hex Size	Square Size	Square Drive, inches
BWD482	2 7/32"	1 3/4"	4"	5/8"	1 11/16"	1 1/2"	13/16"	3/4
BWD483	2 15/64"	2 15/64"	4"	5/8"	1 11/16"	1 1/2"	13/16"	1
BWDM412	2 11/32"	1 3/4"	4 1/4"	17/32"	1 43/64"	41 mm	21 mm	3/4
BWDS483	2 15/64"	2 15/64"	4"	5/8"	1 9/64"	1 1/2"	13/16"	1"

BWDM412 Budd Wheel Socket

- For 1986 and later Nissan® and Isuzu® classes 4, 5, 6 and 7

BWDS483 Budd Wheel Impact Socket

- Dual-opening socket allows just one socket to remove the outer Hex nut and the inner square nut used on Budd wheel assemblies for semi trucks and buses
- Flank Drive® wrenching system configuration
- Special alloy steel for strength and durability
- Some Budd wheel assemblies have long inner nuts while some have short inner nuts. The BWDS483 is designed to engage only short inner nuts; for long inner nuts, use the BWD483

Stud Remover and Installer

BWS1316A

BWS1316A Stud Remover (Blue-Point®)

- Use on 13/16" studs on Budd wheels

WSK755 Light Truck Wheel Stud Kit (*Blue-Point*)

- Use on most US and import light trucks and SUVs
- Self-centering units permit quick installation the first time
- Will not damage threads: use with impact wrenches
- Clamshell container for storage
- Includes 9/16"-18, 1/2"-20, 12 mm-1.75 and 14 mm-1.5 installers plus spacer and washer

WSK755

WSK938 Automotive Wheel Stud Kit

- Use on most US and import cars
- Self centering units permit quick installation the first time
- Will not damage threads: use with impact wrenches
- Clamshell container for storage
- Includes 7/16"-20, 1/2"-20, 12 mm-1.25 and 12 mm-1.5 installers plus spacer and washer

Stock No.	Square Drive, inches	Wrench Size	Length
BW626A	3/4	13/16" square	4"
IM562	3/4	1 3/4" hex	2 3/4"
SIMM332	3/4	33 mm hex	82.6 mm
BW726A	1	13/16" square	2 1/4"
SIMML332	3/4	33 mm hex	152.4 mm
SIMML333	1	33 mm hex	152.4 mm

BW626A

Impact Sockets

- Use with socket retainers listed below
- Industrial finish

IMPACT SOCKET RETAINERS

3/4" Drive

IM182R Rubber Locking Ring

- For all 3/4" drive units

IM182P Steel Locking Pin

IMR2 Socket Retainer

- 1" Drive

IM243P Steel Locking Pin

- For use with IM243R
- Fits IM35

IM243R Synthetic Rubber Locking Ring

- For IM35, IM243–IM443 and SIM223–SIMM353

IMR3 Socket Retainer

- For all 1" drive sockets
- One-piece retention system holds socket to impact wrench anvil

BEAD BREAKERS

Bead Breakers

TR200

TR200 Bead Breaker

- For bus, truck or tractor tires
- Sliding hammer weighs 13 lb
- Stroke length is 16"; overall length is 46" closed and 62" expanded

BH102

BH102 Hammer

- 9 1/4 lb 32" long handle gives force and leverage for bead breaking on auto and large truck tires
- Rubber hand grip

BH102-1 Replacement Hammer Handle

WARNING • Read safety precautions on pages W1 to W4

TIRE AND WHEEL: GENERAL SERVICE TOOLS

B2193

Carrier Assembly Socket for Toyota®/ Lexus® vehicles

B2193 Spare Tire Carrier Assembly Socket, 5-point for *Toyota/Lexus*
- Tough nickel chrome plating provides corrosion resistance
- Special alloy steel provides the highest match of strength and durability
- Overall length: 4" long

Applications:
Great time saver for PDI (Pre-Delivery Inspection) when selling a new vehicle and you want to check the air pressure of the spare tire. Saves time when doing an oil change and the air pressure of the spare tire is checked as part of the service.

TR100 TR102 TSP813

Rim

TR100 Rim Tool
- Use on split rims and rim lock rings
- One end is angled; the other is straight
- 19 1/8" long with 9/16" and 5/8" wide ends

TR102 Rim Tool
- For drop center rims
- 18" long with a 1 3/8" wide end

TSP813 Motorcycle Tire Spreader
- Permits one-person installation of tubed tires on motorcycles, ATVs, small farm equipment and industrial equipment
- Easily access valve stem hole when installing difficult 90° valve stems on tubed tires
- Overall length is 23"

S6129 YA105 SRT1

Seal

S6129 Seal Puller
- Designed to pull wheel bearing or other small seals
- 7" long: industrial finish

YA105 Seal Puller
- For removing rubber seals
- Two tips designed to reach in and fit nearly all seal applications
- 12 5/8" long

SRT1 Seal Removal Tool
- Saves time and labor by eliminating prying against bearings or driving out seals
- Grabs seal only, leaving bearings undamaged
- Seals remain intact allowing for complete failure analysis
- Wedges and long handle provide exceptional leverage
- Heavy duty construction for long life and dependability
- Works with steering, drive and trailer wheel seals on the largest heavy duty wheels

388CF SGCP1BR

Cotter Pin Pullers

388CF High Leverage Diagonal Cutters
- High leverage cutter pulls cotter pins with ease
- 1 1/16" jaw length
- 8 5/16" long
- Vinyl grips

SGCP1BR Cotter Pin Puller
- Make short work of pulling even large pins
- Heat treated shank provides maximum strength
- Soft grip handle: 8 1/2" long

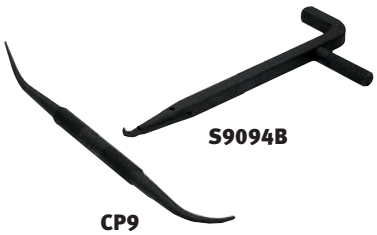
S9094B CP9

S9094B Cotter Pin Puller
- Pins removed by hitting anvil sharply
- Side handle ensures a firm grip
- 10" long
- Replaceable steel hook

S9094A2X Replacement Hook and Rivet Set
- For S9094B

CP9 Cotter Pin Puller
- 38° angle end pries cotter pin loose
- 105° angle end pulls it out
- 10" long

BF620C BF623

Mallets (Blue-Point®)

BF620C Rubber Head Mallet
- Solid rubber head is 3 3/4" long, 2 1/4" diameter
- 11" hardwood handle

BF623 Soft Blow Mallet
- Designed to reduce marring and denting
- Use in assembly applications and on all types of surfaces including metal, glass, plastic and wood
- Special polymer head resists dynamic fatigue, creep and compression set, even at extreme temperatures

TWP8

Truck Wheel Pan *(Blue-Point)*

TWP8 Truck Wheel Pan
- Helps prevent messes and spills
- Fits rims with 13 3/4" inside diameter or larger for use on most large trucks and trailers
- Holds 88 oz of oil
- Pan will not warp if oil is warm
- Compartment above handles holds hub nuts

GCP10

Dustcap

GCP10 Grease and Dust Cap Tool
- Tapered jaws fit behind the crimped edge of grease cap
- One handle designed for prying hub caps loose

YA9020A

Wheel Chocks *(Blue-Point)*

YA9020A Truck Wheel Chocks
- Heavy duty truck chocks are connected by a 10' nylon rope and measure 8" wide and 8" high overall
- Non-slide design

Ball Joint Presses

Stock No.	BJP1 Set Components	ID.-OD, inches	Length, inches
BJP1-1	Sleeve Adaptor	1 9/32–1 21/32	2 1/8
BJP1-2	Pressure Screw, 1 1/8-7 UNRC thread, 7/8 hex	—	9 3/4
BJP1-3A	Pressure Pad (Ball Joint)	NA–1 19/32	3 3/16
BJP1-4	Pressure Pad (Universal Joint)	NA–7/8	3 3/16
BJP1-5	Adaptor	29/32–1 11/32	1 13/16
BJP1-6	Adaptor/Extension	1 1/4–1 21/32	2 1/16
BJP1-7	Adaptor	1 11/16–1 29/32	1 1/8
BJP1-8	Adaptor	1 25/32–2	1.00
BJP1-9	Adaptor, Front face angled 4.5º	1 27/32–2	1 1/4
BJP1-10A	Adaptor, Front face angled 4.5º	2 11/32–2 21/32	2 1/8
BJP1-11A	Adaptor	2–2 1/4	2 1/8
BJP1-12A	Adaptor	2 1/4–2 1/2	2 3/4
BJP1-13B	Adaptor	2 7/16–2 3/4	1 11/16
BJP1-14A	Adaptor	2 11/16–2 15/16	2 3/4
BJP1-16A	Adaptor	2 1/4–2 1/2	1 1/8
BJP1-17	Grease Fitting (for BJP1F Press Frame)	2 1/4–2 1/2	1 1/8

BJP1

BJP1HONDA

BJP1OPT

BJP1-26A

BJP1-27A

BJP1-18A

BJP1 Master Ball Joint/Universal Joint Press Set
- Master ball joint press set covers 95% of current US SUVs, light trucks and passenger cars

Applications: Ford® (43 models), GM® (53 models), Dodge®/Daimler-Chrysler® (54 models) and Jeep® (16 models) vehicles
- Installs and removes ball joints with pre-fitted straight grease fittings
- Press frame features large throat for increased ball joint applications and vise mount capability for U-joint applications
- Locking cup design holds cup in place
- Large, coarse thread pressure screw for extra strength and maximum force
- Grease zerk fitting for smooth screw action. Includes full ball joint/universal joint application chart and storage/carrying case

BJP1F Press Frame
- 7 13/16" throat opening; 3 1/2" depth; 6" height; 10 13/16" length

BJP1HONDA Adaptor Set for Honda® Vehicles
- For removal and installation of upper/lower ball joints on many Honda® and Acura® vehicles: must be used with BJP1 master ball joint/universal joint press set. Includes BJP1-22 and BJP1-24 ball joint adaptors plus (two each) ME7A208 O-rings

BJP1OPT Adaptor Set
- Special application set for removal and installation of upper and lower ball joints
- Set must be used with the BJP1 Master Ball Joint Press Set
- Includes BJP1-22A, BJP1-24A, BJP1-25A, BJP1-26A and BJP1-27A Ball Joint Adaptors in storage tray

BJP1-22A Adaptor
- For removal and installation of upper/lower ball joints on many *Honda* and *Acura* vehicles: must be used with BJP1 master ball joint/universal joint press set

BJP1-24A Adaptor
- For removal and installation of upper/lower ball joints on many *Honda* and *Acura* vehicles: must be used with BJP1 master ball joint/universal joint press set

BJP1-25A Receiver Adaptor
- Use with the BJP1 master ball joint/universal joint press set for quick removal and installation of ball joints on *Ford* F450 and F550 trucks from 2005–2007

BJP1-26A Adaptor
- This new, optional adaptor is to be used with the BJP1 Master Ball Joint/Universal Joint Press Set
- Use BJP1-26 in combination with BJP1-4 to remove or install front axle U joints for 2002 – present *Dodge* Ram® 2500 and 3500 Series with the American 9.25 axle

BJP1-27A Adaptor
- Adaptors required to work on the 1995–2008 *Ford* Explorer
- Lower Ball Joint:
  Install ram – BJP1-6 and BJP1-12, Install receiver – BJP1-16,
  Remove ram – BJP1-3, Remove receiver – BJP1-27

ME7A207 Retaining Ring
- Retaining ring included in BJP1 and UJP1 sets

ME7A208A Large Snap Ring
- Large snap ring included in BJP1 and UJP1 sets

ME7A209 Small Snap Ring
- Small snap ring included in BJP1 and UJP1 sets

ME9A34 Steel Ball
- Steel ball included in BJP1 and UJP1 sets

BJP1-18A Receiver Adaptor
- Use with BJP1 for quick removal and installation of lower ball joints on *Dodge*/Mercedes® Sprinter® van models from 2003–2007
- Tools required for lower ball joint removal/installation include: install ram (BJP1-11), install receiver (BJP1-13), removal ram (BJP1-6) and removal receiver (BJP1-18)
- No upper ball joint applications apply to this tool

RKBJP Repair Kit

PAKPB061 Storage Case

ZBJP1B BJP1 Owners Manual

WARNING • Read safety precautions on pages W1 to W4

WHEEL ALIGNMENT: BALL JOINT

A204

Ball Joint/Tie Rod Separators

Stock No.	Jaw Opening, inches	Overall Length, inches
A204	5/8	12
A200	13/16	18
A201	1	12
A203	1 1/4	12

Ball Joint Sockets

S9365B

S9365B Ball Joint Socket
- For medium size Chrysler® cars
- 3/4" square drive
- Wrench size is 1 59/64", length is 2"

S9613

S9479A Ball Joint Socket
- For Dodge®/*Chrysler* pickups and vans
- 3/4" square drive
- Wrench size is 2 9/64", length is 2"

S9613 Ball Joint Socket
- Use on 4-5B axles such as found on *Dodge*, Ford®, Chevrolet®, GMC® and International® four wheel drive trucks
- Adjusts the sleeve in the top of the yoke on the front suspension
- 1/2" square drive, 1" OD, 2 1/8" long

BJR1

BJR1 Ball Joint Socket

(Subaru® vehicles)
- Easily removes stubborn ball joints on select *Subaru* vehicles
- Stay safe dealing with low clearance and heavy corrosion
- Baja, 2003–2006
- Forester®, 1998–2010
- Impreza®, 1993–2010
- Legacy®, 1990–2010
- Outback®, 2000–2010

BJR2

BJR2 Ball Joint Socket

(*Subaru* vehicles)
- Faster, safer ball joint removal for *Subaru* vehicles
- Easily remove stubborn ball joints for increased productivity
- 3/4" hex on pressure screw can be driven by hand or with impact gun
- Beat the flat rate by doing the job faster and with less effort
- Industrial finish helps protect against corrosion
- Use on *Subaru* Tribeca® vehicles 2006–2012

IMDM410

IMDM410 12-Point Metric Shallow Impact Socket

Applications: For removing and installing the lower ball joint on 2013–current BMW® 5 and 7 series vehicles
- 41 mm, 12-point, 1/2" drive

SERVICE TOOLS

1658C

General Service Tools (Blue-Point®)

1658C Pinch Bar
16" long.

2420A Pinch Bar
20" long.

2430C Pinch Bar
Tapered point on one end and a chisel type edge on the other. 7/8" edge, 7/8" stock, 38" overall length.

YA7970

YA7970 Hub Clamp Expander
- Designed for hubs and clamping style struts and ball joint mounts
- Allows easy removal and installation of struts and ball joints
- Interchangeable spreaders prevent damage to aluminum or cast iron hubs
- Adjustable for use on hubs with centralized or non-centralized slot
- Allows for on the vehicle repair

General Service Tools

SIML160

SIML160 6-Point Extra Deep Impact Socket
- Use to remove or replace fuel tank retaining strap nuts
- Also has applications on emergency brake adjustment nuts and stabilizer retainers
- 1/2" square drive; 1/2", 6-point wrench opening
- 5" long

General Service Tools

GCP10 Grease and Dust Cap Tool
- Tapered jaws fit behind the crimped edge of grease cap
- One handle designed for prying hub caps loose

GAW1290 Wheel Alignment Wrench
- 18 1/2" long for extra leverage
- 21 mm 12-point with special angle and bi-directional offset to access difficult to reach bolts
- 24 mm 12-point deep offset for access to guarded bolt heads without the sloppiness of breaker bar and socket
- 24 mm 12-point deep offset for access to 12-point bolt heads with access to lock nuts through the socket
- Use on alignment bolts for Audi®, VW®, Porsche®, BMW® and Mini® vehicles

TC90A Tail Pipe Cutter
- Handles on the car cutting from 3/4"–3 1/2" diameter
- 16-link cutter chain is 12" long
- Threaded shaft with cross piece provides elasticity to help prevent chain wheels from breaking
- Ideal for cutting the strut assembly to enable servicing of the strut cartridge

TC90A1 Chain Assembly
- Includes one wheel and one roll pin

BF620C Rubber Head Mallet (Blue-Point®)
- Solid rubber head is 3 3/4" long, 2 1/4" diameter
- 11" hardwood handle

B240B Brake and Accelerator Pedal Jack *(Blue-Point)*
- Holds throttle at a constant rpm
- Easily adjusts to desired length
- Adjustment screw fine-tunes desired RPM
- Rubber tip keeps the tool firmly positioned
- Overall length of 40" (102 cm)
- Can also be used as a pedal depressor

YA6510 Bushing Extractor *(Blue-Point)*
- Used on Acura® Integra® (1994–2001) plus various Honda® vehicles (1988–2001)

YA6510-2 Bushing Extractor Adaptor *(Blue-Point)*
- Enables the YA6510 bushing extractor to be used on 1990–1993 *Integra* vehicles

GCP10

GAW1290

TC90A

BF620C

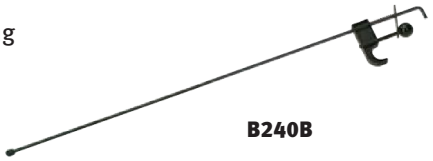
B240B

YA6510

SHOCK ABSORBER

Shock Absorber Sockets

Stock No.	Square Drive, inches	Wrench Oval Width	Wrench Oval Diameter	Length
A137	3/8	1/4"	5/16"	29/32"
A138	3/8	15/64"	21/64"	29/32"
A139	3/8	6 mm	8 mm	23 mm

A137

CASTER CHAMBER

Wrenches

Metric combination wrenches. Long handle design for access.



mm	Stock No.	A	B	C	D	E
17	OEXLM17B	25	35	11	8	298
18	OEXLM18B	27	37	12	8	314
19	OEXLM19B	28	39	12	9	330

OEXLM18B

CC6630

C6630 Camber/Caster Alignment Tool
- Works on 2003 and later GM® "G" Series Chevy® Express and GMC® Savanna vans
- Eliminates need to use the front 21 mm eccentric bolt, which is difficult to access behind a steel shield
- Hook tool on the top "A" arm and, with locking nut loosened, push or pull for easy caster and camber adjustment
- Saves about 15 minutes per side

⚠WARNING
- Do not use "cheater bars" on handles
- Do not use chrome or industrial finish hand tools with impact drivers
- Read safety precautions on pages W1 to W4

WHEEL ALIGNMENT: TIE ROD

WA13A

WA17

YA2218

YA2222

YA3500

WW500

YA6870

WW600

TRW1

Tie Rod Adjusting Tools

WA12A Tie Rod Adjusting Tool
- For large cars and light trucks
- 1/2" square drive: 3 3/4" long

WA13A Tie Rod Adjusting Tool
- For compact and medium cars
- 1/2" square drive: 3 3/4" long

WA16 Tie Rod Adjusting Tool
- For large trucks
- 1/2" square drive: 4 7/64" long

WA17 Tie Rod Adjusting Tool
- Designed to permit 360° rotation of the adjusting sleeve, even in tight quarters
- Use on 1 7/8" sleeves on full size 3/4 and 1 ton pickups, including Ford® Super Duty
- Use with 1/2" square drive ratchet or breaker bar
- Chrome finish: 4 3/4" long

YA2218 Tie Rod Adjusting Wrench
- For US and import vehicles with rack and pinion steering using tie rods with knurled or 17.0 mm–18.5 mm hex gripping sections
- Spring loaded jaws and comfort grip handle

YA2222 Tie Rod Adjusting Wrench
- For US and import vehicles with rack and pinion steering using tie rods with knurled or 12 mm hex gripping sections
- Spring loaded jaws and comfort grip handle
- 10 1/2" long

YA2223 Tie Rod Adjusting Wrench
- For rack and pinion steering using 14 mm–15.5 mm tie rods
- Spring loaded jaws and comfort grip handle
- Applications: 1995 and later Dodge® Dakota® and Caravan®, 1998 and later *Dodge* Durango®, *Dodge* Viper® and most 1999 and later GM® 1/2, 3/4 and 1 ton trucks

YA2224 Tie Rod Adjusting Wrench
- Similar in design to YA2222 but for 10.5 mm–12 mm diameter tie rods like those found on *Ford* Escort®, *GM* Geo, and smaller Nissan® vehicles with rack and pinion steering
- Spring loaded jaws and comfort grip handles
- 9 1/2" long

YA3500 Universal Inner Tie Rod Wrench (Blue-Point®)
- Removes inner tie rods equipped with completely round end sockets or flats
- Designed to remove and install all inner tie rod sockets up to 1 15/32"
- Wrench head has three set screws that tighten against the socket
- Includes 1/4" short head hex wrench
- Lifetime warranty

WW500 Rack Wrench *(Blue-Point)*
- Use on steering racks to service inner tie rod ends
- Fits rack end with hex drive, round with two drive flats or round with no drive flats
- Universal fit from 33 mm–41 mm (1 15/16"–1 9/16") and hex sizes from 31 mm–35 mm (1 1/4"–1 3/8"), 19 mm (3/4") hex drive
- Clamp force increases as load is applied

YA6870 Rear Toe Adjustment Kit for Subaru® Vehicles
- Includes two wrenches: each 16" long for extra reach
- YA6870-1: 6-point, 22 mm wrench with the correct 0° offset to securely hold the cam bolt
- YA6870-2: 6-point, 17/19 mm dual-ended wrench designed to meet the high torque levels required when loosening/tightening the cam bolt retaining nut
- Used on all *Subaru* vehicles 1990 and later
- YA6870-1 fits *Subaru* vehicles 1990 and later: YA6870-2 fits 1990–2008 *Subaru* vehicles (17 mm) and 2009 and later (19 mm)
- High quality steel is specially heat treated for torque requirements

YA6870-1 Toe Adjustment Wrench for *Subaru*
- Cam bolt wrench for *Subaru*
- YA6870-1 fits *Subaru* vehicles 1990 and later

YA6870-2 Toe Adjustment Wrench for *Subaru*
- Cam bolt retaining nut wrench for *Subaru*
- YA6870-2 fits 1990–2008 *Subaru* vehicles (17 mm) and 2009 and later (19 mm)

WW600 Heavy Duty Rack Wrench *(Blue-Point)*
- New larger size provides added coverage for US and import trucks and SUVs
- Suits multiple rack ends and sizes (hex drive, round with two flats, round with no flats)
- Fixed position rings provide added strength
- Patented cam design increases force as load is applied
- Universal design suits rack end diameters from 38 mm–46 mm (1 1/2"–1 7/8")
- Use on vehicles with limited access to avoid the need to remove the rack assembly
- WW600 expands upon the already available WW500 which does 33 mm–41 mm (1 5/16"–1 9/16") tie rods

TRW1 Wrench, Tie Rod
- Use to adjust tie rods on vehicles with rack and pinion steering
- Works on spline, hex and two flat design tie rods
- Spring loaded upper jaw pivots to accommodate tie rods ranging in sizes from 10mm–18 mm
- Wrench is self-adjusting
- Cam action increases the gripping pressure as the load applied to the handle increases
- Heat-treated for durability

YA3000D

WA14A

WA800

ITRS22

YA3300

Tie Rod Removal/Installation Tools

YA3000D Inner Tie Rod Tool (Blue-Point®)
- Removable crowfoot adaptors are placed on hex of tie rod
- Engages crowfoot for removal or installation of tie rod
- Includes crowfoot adaptors in 1 3/16", 1 1/4", 1 5/16", 1 7/16", 1 1/2" and 33.6 mm sizes

WA14A Tie Rod End Socket
- For removing tie rod ends
- Fits most cars and some trucks
- U-shaped opening measures 1 3/8" x 3/4"
- Use with 1/2" square drive handles. 1 15/16" ID, 2 1/4" long

WA15 Tie Rod End Socket
- Similar to WA14A
- For tie rod servicing on most any truck in the Class 2–6 range
- U-shaped opening measures 1 7/8" x 15/16"
- Use with 1/2" square drive handles. 2 1/2" ID, 2 7/8" long

WA800 Heavy Duty Truck Tie Rod Socket
- Use on most Class 7 and 8 heavy duty trucks with 9,000–20,000 lb axles
- U-shaped slot measures 1 7/8" x 1 1/2"
- Inside diameter 3"
- Overall length 3 1/2"

ITRS22 Tie Rod Bushing Socket *(Blue-Point)*
- Use to access the inner tie rod bushings on Chrysler® LHS/Concorde® and Dodge® 300M/Intrepid® featuring the LH body style
- Low-profile design provides easy access to install or remove the 7/8" or 22 mm hex head bolts
- A conventional socket cannot be used in this application

YA3300 Universal Inner Tie Rod Set *(Blue-Point)*
- A faster, easier and more secure way to replace tie rods
- Quick on/off interchange between the two knuckles
- Easy self-adjusting and cinching in various shapes and sizes
- No more guesswork or fuss with crowfeet style tools
- Kit includes YA3300-1 large head (40 mm–45 mm), YA3300-2 medium head (35 mm–40 mm) and YA3300-3 tube in YA3300-Case storage case

MacPherson/Coil Spring Compressors

WA92 Coil Spring Compressor
- Holds coil spring at desired tension for removal of other parts
- 11" screw
- Liberally lubricate threads with anti-seize compound

WA92

MSC1 Master MacPherson Strut Tool *(Blue-Point)*
- Designed to quickly and easily compress most MacPherson strut springs
- Compresses up to 5/8" coil diameter
- Broad spring contact for stable compression
- ACME® threaded rod and built in detent latches to help lock coil in place
- Forged construction for strength and durability

MSC2 Coil Spring Compressor *(Blue-Point)*
- Removes and installs coil springs quickly and safely
- Compresses coil springs on all passenger cars and pickup trucks
- Features *ACME* threaded rod
- Includes instructional card

MSC2

MSCS1000 Master Spring Compressor Set
- Includes MSC1 and MSC2 in storage case

YA8730

Strut Nut Socket for VW®/Audi® Vehicles

YA8730 Strut Nut Socket for *VW/Audi* Vehicles
- For late model front wheel drive vehicles to remove the top strut retaining nut

YA9260

WA7500

Strut Tools for Ford® and GM® Vehicles

YA9260 Front Strut Cartridge Tool Set for *GM* Vehicles
- Removes and installs front oil- or gas- filled strut cartridge on 1988 and later *GM* W-platform vehicles
- Works on both manufacturer's stock oil-filled shocks and gas-filled aftermarket shocks

YA9260-1 Strut Cartridge Nut Wrench
- Strut cartridge nut wrench from YA9260 set

YA9260-2 Strut Jounce Bumper Wrench
- Strut jounce bumper wrench from YA9260 set

WA7500 Strut Cartridge Tool for GM Vehicles
- Replaces strut cartridge through the body shock tower on *GM* 10 Series ("W" Car) vehicles
- Includes 1988 and later Pontiac® Grand Prix®,Oldsmobile® Cutlass and Buick® Regal®; 1989 and later Chevrolet® Lumina

Bushing Tool *(Blue-Point)* for Honda®/ Acura® Vehicles

YA6810 Bushing Tool Kit for *Honda/Acura* Vehicles
- Used in removing and installing *Honda* and *Acura* lower control arm bushings without the need of a press

Applications:

Honda:
- Civic® 2001–2005
- CRV 2002–2006
- Element® 2003–2006
- Pilot® 2003 and later
- Odyssey® 2005 and later
- Ridgeline® 2006 and later
- Accord® 2003–2007

Acura:
- MDX® 2000–2006
- TL® 2000–2007

YA6810

⚠WARNING
- Do not use "cheater bars" on handles
- Do not use chrome or industrial finish hand tools with impact drivers
- Read safety precautions on pages W1 to W4

WHEEL/AXLE PULLERS: KING PIN PULLERS

CG430HYC

20 Ton Capacity Hydraulic

Stock No.	Pressure Screw	Yoke Adaptor	Work Head	Yoke Post (2)	Post Nut (2)	Pilot Guide	1 3/8" x 7/8" Bushing	1 3/8" x 3 1/4" Bushing	Expansion Plug	Hydraulic Power Pack	7/8" Diameter Pilots
CG430HYC	CG430-1	CG430-2	CG430-3	CG430-4	CG45-2	CG430-6	CG430-7	CG430-8	CJ91-2A	CG420A	CG230-9 (6")
–	–	–	–	–	–	–	–	–	–	–	CG230-8 (4")
–	–	–	–	–	–	–	–	–	–	–	CG230-10(8")

CG430HYC Hydraulic King Pin Press Set
- CG420A hydraulic ram and pump delivers up to 20 tons of controlled power to remove stubborn king pins on large vehicles with king pin diameters up to 1 1/4"
- Also removes brake shoe anchor pins on trucks
- Wide side arm construction
- Uses three pilots: 7/8" x 4", 7/8" x 6", and 7/8" x 8"
- Includes two guide bushings: 1 3/8" x 7/8" and 1 3/8" x 3 1/4"

CG430HYC2S Hydraulic King Pin Press Set
- CG430HYC Set with CG420A2S ram and two-stage pump

35 Ton Capacity Hydraulic

Stock No.	Pressure Screw	Yoke Adaptor	Work Head	Yoke Post (2)	Pilot Guide	Post Nut (2)	1 15/16" Bushing	1 9/16" Bushing	1 13/16" Bushing	Hydraulic Power Pack	Pilots
CG730HY	CG730-1	CG730-2	CG730-3	CG730-4	CG730-6	CG750-7	CG730-7	CG730-8	CG730-9	CG420A	CG730-12 (6 3/4")
–	–	–	–	–	–	–	–	–	–	–	CG730-10 (2 1/4")
–	–	–	–	–	–	–	–	–	–	–	CG730-11 (4 1/2")
–	–	–	–	–	–	–	–	–	–	–	CCG730-15 (6")
–	–	–	–	–	–	–	–	–	–	–	CG730-13 (9")
–	–	–	–	–	–	–	–	–	–	–	CG730-16 (9 1/2")
–	–	–	–	–	–	–	–	–	–	–	CCG730-14 (11 1/4")

CG730HY2S CG730HY Set with CG420A2S ram and two-stage pump

CG730HY Hydraulic King Pin Press
- For use on large trucks and semi trucks with king pin diameters from 1"–2"
- Similar to CG430HYC except it uses 35 ton hydraulic power components (CG720 ram, CG420-2A pump, CG420-3-1 hose and CG420-4 quick coupler)
- Includes three guide bushings and seven pilots

CG730HY2S King Pin Press Set
- CG730HY Set with CG420A2S ram and two-stage pump

CG730 King Pin Press Set
- CG730HY Set less the hydraulic power components

CG230A

Manual Set for 3/4 and 1 Ton

Stock No.	Spread, inches	Reach, inches	Pressure Screw	Screw Yoke	Screw Yoke Post (2)	Post Nut (2)	General Use Head	1 1/4" Bushing	7/8" Diameter Pilots	Adaptor
CG230A	5 1/8	12 3/16	CG230-1	CG230-2A	CG230-4	CG230-5	CG230-3A	CG230-6	CG230-9 (6")	CG230-11
–	—	—	–	–	–	–	–	–	CG230-7 (2")	–
–	—	—	–	–	–	–	–	–	CG230-8 (4")	–
–	—	—	–	–	–	–	–	–	CG230-10 (8")	–

CG230A Truck King Pin Press Set
- Spread 5 1/8"; Reach 12 3/16"
- Includes: 1 1/4" bushing guide, adaptor and 4 7/8" diameter pilots 2", 4", 6" and 8"

Applications:
Heavy trucks, buses and vans having king pins larger than 7/8", including Ford® 3/4 ton and 1 ton trucks and vans.

Wheel Hub Removal Adaptor

DHP1 Wheel Hub Removal Adaptor for Dodge® Vehicles

- Designed to remove the front hubs found on 3/4 ton (2500 series) and 1 ton (3500 series) *Dodge* pickup trucks
- Cut the flat rate for changing out U-joints, front differential service, ball joints and any front hub service
- On average it takes 3.4 hours to do both sides using a sledge hammer, torch or heavy duty slide hammer. With the DHP1, it takes about one hour to do both sides
- No broken rotors when using a sledge hammer
- No heavy slide hammers to use
- Wheel bearing and seal will not get damaged

DHP1

FHP1 Wheel Hub Removal Adaptor for Ford® Vehicles

- Designed to take off the front hubs found on the F250® and F350® series *Ford* pickup trucks
- Cut the flat rate for changing out U-joints, front differential service, ball joints and any front hub service
- Soft insert of socket will not damage the studs

FHP1

Pullers

CJ129A Universal Wheel Hub Puller

- Remove front wheel/axle assembly on all front wheel drive *Ford*, GM®, Chrysler® and most imported cars
- Also use to remove rear brake drums on tapered axles such as those found on AMC® and *Chrysler* vehicles
- Removable anvil fits over 1 1/8" hex on pressure screw
- Includes adjustable legs

CJ129A

4567SH Bolt-on Axle Shaft Puller

- Breaks axles loose on *Ford* and *GM* vehicles and light trucks with flange-type axles
- Includes housing, three removable jaws, 10 lb slide hammer and 1 1/2"-12 x 23 1/2" slide screw with a 1 1/2" hex
- Fits any bolt pattern with a 4"–7" bolt circle

4567SH

YA498A Front Wheel Drive Hub Puller

- For most US and import vehicles with independent front suspension
- Pressure screw size is 5/8"-18w x 5 1/2"

YA498A

Slide Hammer and Shaft

CJ1250 12 lb Slide Hammer

- Designed to pull rear axles
- Slide hammer is approximately 25 1/4" long with a 5/8"-18 thread
- Can be used with the YA498A hub puller

CJ1250

⚠WARNING

- Screen puller application
- Read safety precautions on pages W1 to W4

DRIVE LINE: DIFFERENTAL

M3548A

M3586

M3587

IMDM360

A176

S6657

Differential Service Tools

Stock No.	Wrench Size, inches (mm)	Drive Size, inches	OD Wrench End, inches (mm)	OD Drive End, inches (mm)	Bolt Clearance, inches (mm)	Hex Depth, inches (mm)	Overall Length, inches (mm)
M3548A	2 3/4	3/4	3 9/16	1 3/4	2 5/16	1 7/32	3 3/4
M3586	1 7/8	3/4	2 3/8	1 3/4	2	1 1/8	2 3/4
M3587	(36)	3/4	2	1 3/4	1 9/16	1	2 1/4
IMDM360	(36)	1/2	(50.8)	(46)	(41.3)	(22.2)	(57.2)

M3548A Diesel Pinion Nut Impact Socket
- Use on pinion nuts only

M3586 Pinion Nut Impact Socket
- Use to remove pinion nut on Dana® 80 series axles on late model Ford® and Dodge® trucks
- Designed to handle the specific application

M3587 Pinion Nut Impact Socket
- Use to remove pinion nut on 2005 Cadillac® CTS, 2003 GM® and 2004 *Dodge* trucks with 11.5" AAM axles
- Additional applications: removal of late model BMW® axle shafts plus *BMW* E38, E39, M3 and SUVs with 36 mm 12-point axle nuts
- Designed to handle the specific application

IMDM360 Impact Socket

Applications: Use to remove pinion nuts on 2003 *GM* and 2004 *Dodge* trucks with 11.5 AAM axles. Other used include Duramax® diesel front crankshaft bolts and late model *BMW* axle shafts.

A176 Differential Adjusting Wrench
- For most differentials where 9/32" and 17/32" adjustment nuts are found
- Useful on transmissions, steering gears and some water pumps where adjustable spanner wrench is required
- 10" long

S6657 Shallow Impact Socket
- 57 mm, 12-point, 1/2" drive

Application:
For removing and installing the differential adjusters on 2011 and newer *GM* 2500 and 3500 HD (9.25") front axles

FRONT WHEEL DRIVE TOOLS

YA3050

YA3080

YA3085

KD3191

Boot and Joint Tools

YA3050 Boot Clamp Pliers
- For earless type clamps, including those found on late model *GM* inboard CV universal joints

YA3080 Boot Clamp Pliers
- For ear-type clamps
- Sturdy enough for ear type clamps, including late model *GM* outboard CV universal joints
- Use with a torque wrench to meet required specifications

YA3085 Boot Banding Tool
- For reinstallation of Band-it® or Band-it Jr.® boot bands

KD3191 Joint Clamp (Blue-Point®)
- Use to wind up the free end of the clamping band
- Holds tension until band can be clipped down
- For use with *Band-it*-style free end clamps, roll band, and clips or *Band-it Jr.*-style preformed clamps
- Socket with ratchet is used to turn the actuating screw for adjustment

FBG1

CVBOOTLG

CVBOOTRP

CVBOOTSM

Boot and Joint Tools (Blue-Point®)

FBG1 Flex CV Boot Installer
- Reduce CV boot installation to less than 20 minutes
- Tool stretches the CV boot, allowing it to slip over the trunion for rapid installation and reduced fatigue
- Includes flex boot Installer, FBGAR air regulator and storage case
- Use CV boots listed on this page

FBGAR Air Regulator
- Air regulator for FBG1 flex CV boot installer

CVBOOTKIT Complete CV Boot Replacement Kit
- Six each CVBOOTSM
- Four each CVBOOTLG
- Two each CVBOOTRP

CVBOOTXS ATV Replacement Boot
- Fits most ATV boot applications
- Includes boot, clamps and grease

CVBOOTXSPK ATV Replacement Boot Kit
- Package of 12 CVBOOTXS

CVBOOTLG Large CV Boot
- Fits most cars and SUVs with large CV boots
- Includes boot, clamps and grease

CVBOOTLGPK Large CV Boot Kit
- Package of 12 CVBOOTLG

CVBOOTSM Small CV
- Fits most cars and SUVs with small CV boots
- Includes boot, clamps and grease

CVBOOTSMPK Small CV Boot Kit
- Package of 12 CVBOOTSM

CVBOOTRP Universal Rack and Pinion Kit
- Fits rack and pinion boots on most cars
- Includes boot, clamps and grease

CVBOOTRPPK Universal Rack and Pinion Boot Kit
- Package of 12 CVBOOTRP
- Includes boot, clamps and grease

HST100-1

FABLM8E

Half Shaft Removal Tools

HST100-1 Half Shaft Removal Tool
- 0.900" diameter
- Easily removes half shaft on most US and import front wheel drive vehicles with gentle tap from brass mallet

HST100-2 Half Shaft Removal Tool
- 0.940" diameter
- Easily removes half shaft on most US and import front wheel drive vehicles with gentle tap from brass mallet

Front Wheel Drive Service Tools

FABLM8E Metric Long Ball Hex Driver
- 8 mm hex, 3/8" drive
- For 1978 and later Dodge® Omni and Plymouth® Horizon standard transmission drive axle flange bolts

DRIVE LINE: TRANSMISSION

YA2340

YA7244A

XLE1012A

S5902

EEPV508

SLEPL200

LDT3812

LDTM3812

FIH9057B

YA321

Transmission Service Tools

YA2340 Sealing Cap Set
- Retain transmission fluid by sealing transmission and transaxles when drive shaft or drive axle is removed on most US and import vehicles
- Side gear centering for Ford® transaxles
- Five caps cover a range of 1"–2 3/16"
- Segmented design prevents caps from slipping

YA7244A Quick Connect/Disconnect Tool
- For late model *Ford* vehicles using push lock connectors on transmission cooler lines as well as on fuel lines
- Diameter is 1 1/4"

XLE1012A TORX® Box Wrench
- Box end *TORX* sizes are E10 and E12
- Drive shaft must be removed when towing 1980 Chevrolet® Corvette® and 1/2, 3/4 and 1 ton GMC® and *Chevrolet* trucks
- Designed to access drive line fasteners
- Also services AMC® drive lines

S5902 Oil/Transmission Plug Wrench
- Box ends are 17 mm, 6-point and 21 mm, 12-point
- Designed for VW® transmission drain plugs
- 258 mm long

EEPV508 Automatic Transmission Pressure Gauge Set
- Use on all major manufacturer US and import vehicles
- Includes: two gauge assemblies for high- and low-pressure ranges, nine adaptors to test a wide variety of US and import automatic transmissions, comprehensive instruction manual with applications table and storage case
- Four special fittings are also included for connection to hard-to-reach test ports in areas requiring a 45° or 90° angle
- High-pressure gauge assembly includes 3.5" diameter gauge and 10' flexible hose with fluid coupler
- Low pressure gauge assembly includes 2.5" diameter gauge and 6' flexible hose with fluid coupler

SLEPL200 TORX Plus® External Socket
- SLEPL series of *TORX Plus* sockets with shallow countersink are designed for use on external *TORX Plus* low-profile head fasteners so the user can fully engage the fastener head
- For removal and installation of low-profile drive plate and flywheel bolts on QR25 Nissan® motors with automatic transmissions
- It is similar to the J-45816 *Nissan* specialty tool
- For flywheel bolts on QR25 *Nissan* motors with manual transmissions, use the 3/8" drive FTX50TPE male T50 *TORX Plus* Socket

LDT3812 Transmission Oil Cooler Line Disconnect Tool
- Two sizes (3/8" and 1/2") designed to disconnect transmission cooler lines
- Use 3/8" size for 2003 and later *Ford* V8 Explorer® plus 2004 and later *Ford* F150® and Cadillac® vehicles
- Use 1/2" size for *Ford* F250®, F350® and F450® Super Duty trucks

LDTM3812 Camshaft Seal Kit
- Easily removes and installs camshaft and crankshaft seals without damage
- Compact puller with unique extracting hooks engage seal for quick removal
- Interchangeable sleeves and mandrels allow easy installation of new seal
- Fits seals from 21.5 mm– 64 mm

FIH9057B Transmission Line Quick Disconnect Tool
- For 3/8" and 1/2" O.D. transmission and fuel lines on certain *Ford* and *Cadillac* models
- Constructed from durable 30% glass filled nylon allows more pressure to be applied and delivers a longer tool life
- Compact design allows access in tight quarters

Applications:
Ford: Explorer® (2002 and later with five-speed automatic transmission), F150 trucks (2003 late production series with four-speed automatic transmission), F150® trucks (2004 and later – all models), Thunderbird and Lincoln® LS (2003 and later), *F250*/*F350* truck series (2004 and later) *Cadillac*: SRX (2004 and later), CTS (2003 and later), STS (2005 and later)

YA321 Sealing Cap Set (Blue-Point®)
- Five polyethylene caps to service all US and most import transmissions when the drive shaft is removed
- Caps keep dirt out of the transmission and prevent fluid loss

207FHRM

Low-Profile Hex Sockets

Stock No.	Drive Size, inches	External Hex, mm	Length, inches (mm)
FHRM7	3/8	7 mm	1 (25.4)
FHRM8	3/8	8 mm	1 (25.4)
FHRM10	3/8	10 mm	1 (25.4)
FHRM12	3/8	12 mm	1 (25.4)
FHRM13	3/8	13 mm	1 (25.4)
FHRM14	3/8	14 mm	1 (25.4)
CPT110A	3/8	17 mm	1 (25.4)

207FHRM Low-Profile Socket Set
Includes FHRM7–FHRM14 (7 mm–14 mm) Low-plus CPT110A (17 mm) Low-Profile Hex Sockets (7pc).

S8673C1

S8673B3

Bushing/Oil Seal Pullers and Driver

- Designed to easily remove or replace transmission rear extension housing bushings and oil seals on most Ford®, GM®, Chrysler® and AMC® automatic transmissons
- Refer to chart below for specifications and applications

Stock No.	Type	O.D., inches	Depth, inches	Application
S8673C1	Driver	—	1 15/16	*Ford* C-4 Series, *GM* 200, 350 and 375 Series
S8673B3	Seal Installer	2 3/4	1 15/16	*Ford* C-4 Series, *GM* 200, 350 and 375 Series

Transmission Service Tools

CPT110A Drain Plug Socket
- Use on VW® transmission drain plugs
- Additional applications include removing front wheels on Triumph® Daytona® and America® motorcycles
- 17 mm, 6-point socket is for *VW* transmission drain plugs
- 3/8" drive, 1" long

CPT110A

SRP400B

SRP4

PRT600A

Snap Ring Pliers

- Parallel jaw lock-ring pliers (high leverage) for easy lock-ring removal/installation
- Cushion grips offer comfort while resisting transmission fluids
- Natural steel finish with a tough protective clear coating to prevent corrosion

SRP400B Snap Ring Pliers Set

SRP1C Snap Ring Pliers
- 90° angle serrated jaws (for *GM* transmission output shaft)
- 3/32" tip width; 1/16 tip thickness; 8 15/16" long

SRP2B Snap Ring Pliers
- 90° angle serrated jaws with dimples for lock rings with tabs
- 3/32" angle tip width; 1/8" tip thickness; 8/78" long

SRP3B Snap Ring Pliers
- Straight tip serrated jaws
- 3/32" wide tip; 8 7/8" long

SRP5C Snap Ring Pliers
- Straight non-serrated tip with dimples for lock rings with tabs
- Seven pivot points create compound high-leverage for easy lock-ring expansion
- Jaws always remain parallel
- 1/4" tip width; 1/8" tip thickness; 10/18" long

SRP4 Snap Ring Pliers
- 3/32" wide ends with 1/8" diameter dimple for snap rings with tabs
- Jaws bent at a 90° angle
- 14" long

PRT600A Transmission Service Set
- For *Chrysler*, *GM* and *Ford* vehicles
- Includes the following six tools:

PRT21 High Range Seal Tool
- 2 1/2" x 1/2" spring steel blade
- 7 1/2" long

PRT22 High Range Seal Tool
- .015" high carbon wire loops on each end
- 6 1/2" long

SRPC3800 Convertible Retaining Ring Pliers
- Straight .038" tips
- 6 7/16" long

SRPC7000 Convertible Retaining Ring Pliers
- Straight .007" tips
- 7 7/16" long

PR15 External Snap Ring Pliers
- Wide (1/16") tips are angled at 90°
- 8 3/4" long

PR16 External Snap Ring Pliers
- Wide (3/16") notched tips
- 8 3/4" long

⚠WARNING
- Do not use "cheater bars" on handles
- Read safety precautions on pages W1 to W4

DRIVE LINE: TRANSMISSION

CJ193

CJ193-1-1

YA9348

YA9648

YA328A

Transmission Pump Puller

CJ193 Transmission Pump Puller
- Removal of front pump on GM®, Ford® and Chrysler® transmissions requires two pullers
- Includes 1 1/4 lb slide hammer and 3/8"-16 x 14" slide screw

Applications: Most *GM*, *Ford* C-4, C-5 AOD (Automatic Overdrive), and *Chrysler* TF904-72 ON.

CJ193-1-1 Optional Adaptor
- M10-1.5 male end is designed to work on *Ford* and *Chrysler* transmission pumps
- 3/8"-16 female end screws onto slide screw of CJ193
- 2 1/4" long

Seal/Bushing Installers and Removers

YA9348 Transmission Seal Remover/Installer for *GM* vehicles
- Removes and installs *GM* transmission shift selector shaft seals without draining the fluid
- 5/8" drive size, 3/8"-16 UNC-2B thread
- Remover bolt has a 9/16" head and 3/8"-16 UNC-2A thread

YA9648 Removal/Installation Tool
- Applications on 1996 and later *GM* trucks and Astro® vans with 4L60E and 4L80E transmissions

Magnetic Angle Locator (Blue-Point®)

YA328A Angle Locator

Precise, accurate tool to determine angle measurements
- Ideal for checking drive shaft angle
- Red degree indicator located behind numbers for exact reading of graduations
- Fractional and metric scales molded into base of tool in 1/8" and centimeters
- Large 1 7/8" x 7/8" magnet in base for secure retention

DRIVE SHAFT

UJP1

Universal Joint Tools

UJP1 Universal Joint Press Set Press frame features large throat and vise mount capability for U-joint applications. Locking cup design holds cup in place. Large, coarse thread pressure screw for extra strength and maximum force. Grease Zerk fitting for smooth screw action. Adaptor hardness of 42–46 Rc. Includes application chart and storage case.

BJP1F Press Frame
- 7 13/16" throat opening; 3 1/2" depth; 6" height; 10 13/16" length

BJP1-1 Sleeve Adaptor 2.12" length.

BJP1-2 Pressure Screw 1 1/8-7 UNRC, 7/8" hex.

BJP1-4 Pressure Pad Universal Joint, 3 3/16" length.

BJP1-5 Adaptor .90"–1.33"

BJP1-7 Adaptor 1.68"–1.89"

BJP1-8 Adaptor 1.78"–2.00"

BJP1-17 Grease Fitting

ME7A207 Retaining Ring
- Retaining ring included in BJP1 and UJP1 sets

ME7A208A Large Snap Ring
- Large snap ring included in BJP1 and UJP1 sets

ME7A209 Small Snap Ring
- Small snap ring included in BJP1 and UJP1 sets

ME9A34 Steel Ball
- Steel ball included in BJP1 and UJP1 sets

PAKPB061 Storage Case

CLUTCH

GA454A

SP2031A

YA7646

A144A

ATS2987

A37M

A145

Clutch Service Tools

GA454A Adjusting Wrench for Spicer® Clutch
- For internal adjustment of *Spicer* angle spring and multiple lever clutches
- Eliminates the need for prybars that could damage clutch parts
- 15" long

SP2031A Pilot Bearing Puller
- Attaches to slide hammer shafts with 3/4"-16 or 5/8"-18 threads
- Pressure screw adaptor is made of stress-resistant steel
- Industrial finish

YA7646 Clutch Coupling Tool for *Ford* Vehicles
- Reach and disconnect the hydraulic clutch line from the clutch slave cylinder without damage to the coupling or clutch line
- Same as *Ford* No. T88T-70522-A

Applications:
Current *Ford* vehicles with hydraulic clutch including light duty trucks, Bronco® II, Ranger®, Explorer® and 1989 and later Thunderbird® and Mercury® Cougar with manual transmission and hydraulic clutch

A144A Flywheel Turner
- Use when replacing clutch pressure plate
- Turns flywheel to predetermined point that might be bypassed when "bumping" with starter
- 12 1/8" long

ATS2987 Automatic Transmission Clutch Spring Compressor *(Blue-Point)*
- Use to compress clutch springs on most automatic transmission clutch units
- Packaged in ATS2987-21 storage case

A37M Clutch Aligner Set
- For vehicles with standard transmissions, including many import cars
- Allows quick aligning for complete range of single disc clutches (16 collet sizes ranging from 0.465" –1.181")
- Packaged in PB21 storage case

A145 Clutch Aligner Set
- Smaller companion to A37M
- Includes five double-ended collets ranging in size from .578"–.810"

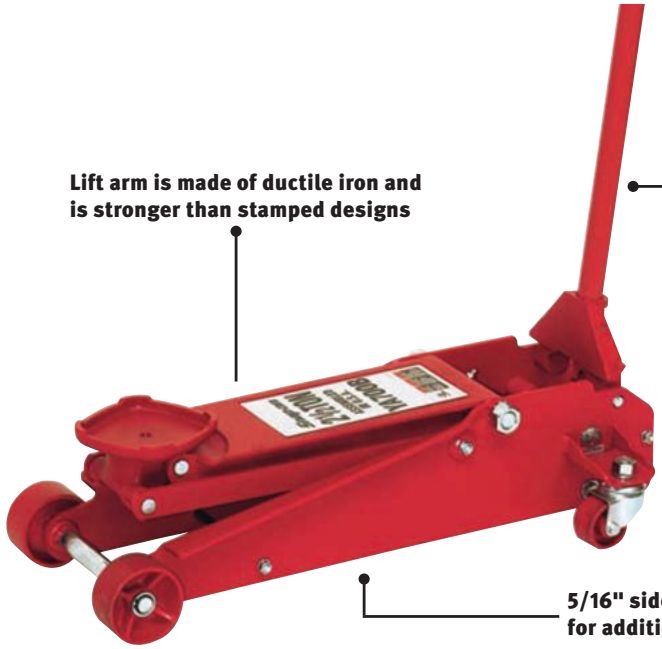

YA700B

YA1707

RACEJACKSET

Service Jacks

Stock No.	YA700B	YA1707*	RACEJACKSET**
Capacity, tons	2 1/2	3 1/2	1 1/2
Maximum Lift Height, inches	23	21 5/8	17 3/8
Low Height, inches	4 3/4	4	3 1/2
Saddle Size, inches	5 3/4	4 1/4	5
Frame Length, inches	30 1/2	29 7/8	25 1/8
Handle Length, inches	45 3/4	50	47 1/2
Warranty	2 Years	1 Year	1 Year
Weight, lb	96	103	46

*Blue-Point®
**Includes ALUMSTAND on p.603

RACEJACKSET Set, Service Jack and Stands, Aluminum, 3pc
- Dual pump design quickly brings saddle to service height
- Diamond cut, slip-resistant handle with foam bumper pad protects vehicles

⚠WARNING

- Do not exceed capacity of jack or jack stands
- Do not work on vehicle supported by jack, use jack stands
- Use jack and jack stands only on hard level surfaces
- Read safety precautions on pages W1 to W4

LIFTING: SERVICE JACKS

YA657C

YA660C

Long Chassis Service Jacks (Blue-Point®)

- YA667C and YA662C feature an air actuated pump to raise lift arm quickly
- Hydraulic pump mechanism is operated by handle or foot pedal pump
- Knob style load release in handle end for precise control
- T-handle provides additional positioning assistance

Stock No.	Type	Capacity, tons	Maximum Lift Height, inches	Low Height, inches	Saddle Size, inches	Frame Length, inches	Handle Length, inches	Minimum Operating Pressure, PSI	Warranty	Weight, lb
YA657C	Hydraulic	4	24	5	5 1/2	50 5/8	42 1/8	—	1 Year	156
YA667C	Air/Hydraulic	4	24	5	5 1/2	50 5/8	42 1/8	140	1 Year	159
YA660C	Hydraulic	10	27	7	7 3/8	54 3/4	42 1/8	—	1 Year	427
YA662C	Air/Hydraulic	10	27	7	7 3/8	54 3/4	42 1/8	140	1 Year	441

YA1731A

YA731B

Air Operated Truck Jacks *(Blue-Point)*

- Air operated lifting mechanism for ease of operations
- Adjustable extension screw raises saddle height
- Uses standard shop air supply (110–175 PSI)
- Rubber wheels allow ease in positioning

Stock No.	Capacity, tons	Low Height, inches	Maximum Lift Height, inches	Power Raise, inches	Screw Extension, inches	Handle Length, inches	Base Size, inches	Minimum PSI (for rated load)	Weight, lb
YA1731A	22	9 7/8	20 1/4	6 3/8	4	48 3/4	22 7/8 x 12 1/2	150	78
YA731B	20	9 3/8	17 5/8	5 1/2	2 3/4	39 1/2	8 x 5 1/2	140	69

YA1228

YA1229A

YA1233A

YAS1233A

Hydraulic Bottle Jacks *(Blue-Point)*

Stock No.	Capacity, tons	Low Height, inches	Maximum Height, inches	Screw Extension, inches	Base Size, inches	Handle Length, inches	Cap Diameter, inches	Operating Force, lb
YA1228	8	8 7/8	17 5/8	2 3/4	4 3/4 x 4 3/4	18 1/8	1 3/8	101
YA1229A	12	9 1/2	18 5/8	3 1/8	5 1/4 x 5 1/8	18 1/8	1 3/4	102
YAS1229A*	12	6	10 5/8	1 5/8	5 1/4 x 5 1/8	18 1/8	1 3/4	89
YA1233A	20	9 1/2	18 5/8	3 1/8	6 1/4 x 5 7/8	18 1/8	2	109
YAS1233A*	20	6 1/2	11 1/4	1 5/8	6 1/4 x 5 7/8	18 1/8	2	101

*Low-profile model

YA874B

YA875B

YA512

YA779B

ALUMSTAND

YA4712

YA4716

Jack Stands (in pairs)

Stock No.	Capacity, tons	Low Height, inches	Maximum Height, inches
YA874B	3 (per pair)	12	19
YA875B	6 (per pair)	16 3/8	25 3/8
YA512*	12 (per pair)	17 1/2	27 1/2
ALUMSTAND*	3 (per pair)	10 3/8	15 3/8
YA4712*	12 (per pair)	19 3/4	30 1/4
YA4716*	6 (per pair)	15 3/4	24 3/8

*Blue-Point®

YA4712 Pneumatic Jack Stands *(Blue-Point)*
- Pneumatic cylinder automatically raises saddle to service height
- Saddle raises by pressing lever, automatically locks into place upon release

YA4716 Pneumatic Lift Jack Stands *(Blue-Point)*
- Pneumatic cylinder automatically raises saddle to service height
- Saddle raises by pressing lever, automatically locks into place upon release
- Built with the professional user in mind

Utility Stand *(Blue-Point)*
- Slim design maximizes work spaces and storage
- Acme screw allows for precise height adjustment

Stock No.	Capacity, tons	Low Height, inches	Maximum Height, inches	Base Size, inches	Cap Size, inches
YA779B	3/4	53 1/4	80	12 (diameter)	5 5/16 x 2 7/16

Hydraulic Wheel Dolly *(Blue-Point)*
- Provides smooth, positive power for the removal and installation of single, tandem and duplex tires and wheels
- Lift arms can be adjusted to handle different wheel combinations

Stock No.	Capacity, tons	Lift Range, inches	Lifting Arm (length), inches	Lifting Arm (spread), inches	Length, inches	Width, inches	Height, inches
YA765D	3/4	2 1/2–8 3/8	26	27 1/2	45 1/8	39 1/2	34 5/8

YA765D

⚠WARNING

- Do not exceed capacity of jack or jack stands
- Do not work on vehicle supported by jack, use jack stands
- Use jack and jack stands only on hard level surfaces
- Read safety precautions on pages W1 to W4

LIFTING: TRANSMISSION JACKS/FUEL TANK STANDS

YA715A

YA714D

YA876C

YA727B

YA780

Transmission Jacks (Blue-Point®)

YA715A 1/2 Ton Air/Manual Hydraulic Transmission Jack
- Uses air for speed of operation and manual pump for precise control
- Extra wide base lowers center of gravity and promotes stability
- Rugged steel wheels and full-swivel ball bearing casters
- Adjustable ratchet style saddle
- Unique, handy release pedal provides controlled lowering of load

YA714D 1/2 Ton High Lift Transmission Jack
- Crank for precise and easy alignment of saddle
- Four adjustable load support arms fit most transmission pan flanges
- Foot pedal pump permits hands-free operation
- Wide base and four casters for stability

YA876C 1/2 Ton Hydraulic Transmission Jack
- Adjustable head can be tilted for optimum alignment of transmission bolt patterns
- Four wheel caster design allows easy movement and positioning
- Rugged steel wheels and full-swivel ball bearing casters
- User friendly 360° rotating pumping socket for maximum directional operation

YA727B 1 Ton Wishbone Hydraulic Transmission Jack
- Use on bus, truck, farm, automotive and construction vehicles
- Load-restraint chain included
- Two heavy cast adjustable mounting plates
- Four wedges to support load

YA780 Transmission Jack Bracket
- Fits most FWD and RWD automatic transmissions
- Use to stabilize transmission when being removed or installed
- Used with a transmission jack

Transmission Jack Specifications

Stock No.	Capacity, tons	Maximum Height, inches	Saddle Base, inches	Lifting Head Size, inches	Handle Length, inches	Chassis Length, inches	Chassis Width, inches	Tilt	Minimum Height, inches	Exp.Saddle Area, inches	Jack Size, inches	Weight, lb
YA715A	1/2	78 1/8	8 7/8 x 7 1/8	9 x 9	11	—	20	12°	37 7/8	21 x 21	34 1/8 x 36 1/8	196
YA714D	1/2	76 5/8	8 7/8 x 7 1/8	15 1/2 x 15 1/2	11	—	33 1/2	12°	37 1/2	21 x 21	34 1/8 x 36 1/8	161
YA876C	1/2	24 3/4	12 5/8 x 7 7/8	9 x 9	22 1/2	31	20	60° (fwd), 18° (rear), 12° (right or left)	8 1/2	17 x 9 3/8	31 1/8 x 15	106
YA727B	1	44 3/4	18 5/8 x 12 1/4	15 1/2 x 15 1/2	19 1/2	48	29 7/8	44° (fwd), 39° (rear), 13° (left and right)	10	20 1/2 x 18 1/2	47 1/2 x 28 1/4	309

YA712A

Fuel Tank Stand

YA712A Fuel Tank Stand
- Easily service fuel tank, fuel pumps and other components
- Handles fuel tanks up to 40 gal (empty)
- Includes anchoring straps and grounding wire
- Measures 9 1/4" H x 32" L x 15 3/8" W

MOTORCYCLE JACKS

YA1715

Motorcycle Jack

YA1715 Motorcycle Jack *(Blue-Point)*
- 1,500 lb capacity
- Low height of 4 1/2", maximum height of 14 3/4"
- Double rubber-lined pad provides extra protection to motorcycle
- Pull handle assists user to maneuver jack into position
- One foot operation for ease of use
- Safety straps to secure motorcycle

HYBRID INNOVATION

Battery Lift

YA785 Hybrid Battery Lift
- Removes and installs battery assemblies on most Hybrid vehicles
- Accommodates battery packs with a special harness to adapt to specific lift points
- Provides a safe alternative to manual lifting
- Minimizes potential damage to vehicle interior
- Compact design, easily folds down requiring minimal storage space
- Harness is designed specifically for Hybrid electrical batteries and rotates 360°

Specifications
- Lifting Capacity: 350 lb (159 kg)
- Maximum Reach: 45" (1,143 mm)
- Lift Weight: 179 lb (81.2 kg) when fully assembled with hydraulic cylinder
- Width: 34" (864 mm) x 51" (1,295 mm) high when assembled
- Maximum Lift Height: 82.5" (2,096 mm)
- Lift collapses to 28" (711 mm) wide x 34" (864 mm) long x 60" (1,524 mm) high for storage

YA785

A238

GA197A

YA2673A

YA2670A

YA554A

Engine Hoist and Sling

A238 Engine Sling
- 40" flexible cable each end with a fitting drilled for 1/2" diameter bolts

GA197A Lifting Pulling Tool
- Maximum lift of 6', minimum of 2'
- Anchored hook swivels a full 360°

YA2670A Engine Support Kit and Hoist
- Ideal for FWD transmission removal and installation
- Supports engine and provides 15° adjustability in each direction
- Rests on drip rails between fenders across engine bay
- Accommodates engine compartments from 46"–61 1/2"
- Includes YA2671A Lifting Assembly

YA2671A Lifting Assembly
- Replacement Lifting Assembly for YA2670A

YA2673A Offset Lifting Bar
- Attaches to the YA2670A and radiator core support
- Provides additional lifting and support

YA2674A W-Car Offset Bar for GM® Vehicles
- Designed to assist with *GM* W-Car body style

YA2675A Swivel Adaptor Set
- Provides the ability for the leg plates to swivel
- Ideal for engine compartments that are wider at the windshield

YA2676A Leg Plates for Honda® Vehicles
- Adapts to fenders on *Honda* vehicles
- Used with YA2675A Swivel Adaptor Set

YA554A Engine Lift Plate
- Bolts to intake manifolds on US two- or four-barrel carbureted V6/V8 engines and throttle body V6/V8 engines
- 1 1/2 ton lift capacity

⚠WARNING
- Do not exceed capacity of jack or jack stands
- Do not work on vehicle supported by jack, use jack stands
- Use jack and jack stands only on hard level surfaces
- Read safety precautions on pages W1 to W4

CHARGE. TEST. BOOST. INVERT. MAINTAIN. DIAGNOSE.

Take charge and be ready for anything with Snap-on® battery service equipment. With these top-of-the-line tools, you can handle anything 6, 12 and 24V that pulls into your shop. That's real power.

Battery Charger Plus™ — Batteries have changed – make sure your charger keeps pace. Smart charge most batteries at the rate you need. Check out the new EEBC400 and EEBC400F.

The D-Tac™ Elite — A diagnostic charger, battery starting and charging system tester, engine starter, digital multi-meter, and cable voltage drop tester with flash-reprogram mode and more.

Booster Packs — Professional-quality equipment that's perfect for the shop or field.

Battery Chargers

EEBC500 Battery Charger Plus™

- Plus: Exclusive flash reprogramming power supply maintains consistent OEM specified voltage up to 60A
- Adaptive: Standard automotive, deep cycle, AGM and gel cell batteries each require a different charging cycle
- Versatile: Charges 6V, 12V and 24V batteries with 4A, 15A and 60A charging rates
- Convenient: GFCI outlets for auxiliary power to lights and other accessories: handy storage compartment for optional battery hand tools
- Smart: Fully automatic operation: microprocessor-controlled algorithms optimize the charge cycle without overcharging. Includes manual mode for timed charging
- Powerful: 300A engine starting power
- Informative: Digital display: voltage, % of charge and alternator % of performance
- Professional: Rugged, streamlined design.
- Higher working height handle helps relieve stress on lower back

EEBC500

Specifications	EEBC500	EEBC500INT†	EEBC500SOJ
Output Currents ADC	60/15/4	60/12/4	60/15/4
Output Voltages VDC	6/12/24	6/12/24	6/12/24
Input Voltage (Rated), VAC	120	230/240	100
Crank Assist Duty Cycle	1/36	1/36	1/36
DC Lead Type	Fixed	Fixed	Fixed
DC Lead Length	7'6"	7'6"	7'6"
DC Lead Gauge	4 AWG	4 AWG	4 AWG
DC Clamps	500A	500A	500A
AC Cord Length, feet	9	9	9
GFCI	Yes	No	No
Voltmenter	Digital	Digital	Digital
Timer	Digital	Digital	Digital
Ventilation	Fan Cooled	Fan Cooled	Fan Cooled
Foam Filled Wheel Size, inches (mm)	10	10	10
Weight, lb	86	90	90
Dimension L x W x H, inches	20.4 x 16.5 x 30.5	20.4 x 16.5 x 30.5	20.4 x 16.5 x 30.5
Outdoor Use	Yes	No	No
Country of Use	North America	Australia, Europe, UK	Japan
Power Supply Cord	Included	EEBC5CABLE-A, E, U	Included

† CE

TECHNICAL SUPPORT 1-866-713-6007

EEBC500CVR *Battery Charger Plus* Cover
- Protective cover for the EEBC500 *Battery Charger Plus* series and the EEBC400 series

EEBC5CABLE-A Power Supply, Australia
- Power supply, Australia. Use only with EEBC500INT

EEBC5CABLE-E Power Supply, Europe
- Power supply, Europe. Use only with EEBC500INT

EEBC5CABLE-U Power Supply, United Kingdom
- Power supply, United Kingdom. Use only with EEBC500INT

EEBC500-15 Lead Set
- 15' for EEBC500 series

EEBC500CVR

EEBC5CABLE-A

EEBC5CABLE-U

EEBC5CABLE-E

⚠WARNING

- Charger must be OFF when connecting or disconnecting leads
- Avoid overcharging batteries
- Read safety precautions on pages W1 to W4

BATTERY CHARGERS

EEBC400

EEBC100

Battery Chargers

EEBC400 Battery Charger Series

- Adaptive: Standard automotive, deep cycle, AGM and gel cell batteries each require a different charging cycle
- Smart: Fully automatic operation: microprocessor controlled algorithms optimize the charge cycle without overcharging. Also includes manual mode for timed charging

EEBC100 Manual Charger (Blue-Point®)

- Manually set charging time as required
- 200A 12V and 100A 6V engine start available for emergency starting
- 40A rapid charge charges in .5–1.0 hours
- 10A fast charge charges in 3–5 hours
- Rugged retractable handle provides convenient storage
- UL® listed

Specifciations	EEBC400	EEBC400F	EEBC400INT	EEBC100
Output Currents ADC	50/10/4	50/25/10/4	50/10/4	40/10/2
Output Voltages VDC	6/12	12/24	12/24	6/12
Input Voltage (Rated), VAC	120	120	230	120
Crank Assist Rating, ADC	250	250 & 225	250	200
Crank Assist On Time (seconds)	20	20	20	5
DC Lead Length	7.0'	6.0' neg/10.0' pos	7.0'	6.0'
DC Lead Gauge	6 AWG (Cu)	6 AWG (Cu)	6 AWG (Cu)	8 AWG (Cu)
DC Clamps	500A	500A	500A	300A
AC Cord Length, feet	7.0'	7.0'	IEC (receptacle)	6.0'
Voltmeter	Digital	Digital	Digital	None
Timer	Digital	Digital	Digital	135 Minute
Ventilation	Fan cooled	Fan cooled	Fan cooled	Fan Cooled
Blow Molded Wheel Size, inches (mm)	10 (254)	10 (254)	10 (254)	6 (152)
Weight, lb	85	85	85	40
Dimension L x W x H, inches	20.4 x 16 1/2 x 30 1/2	20.4 x 16 1/2 x 30 1/2	20.4 x 16 1/2 x 30 1/2	13.8 x 13 1/2 x 20
Outdoor Use	Yes	Yes	No	No
Country of Use	North America	North America	Australia, Europe, UK	North America
Power Supply Cord	Inclued	Included	EEBC5CABLE-A, E, or U	Included
Warranty	2 Years	2 Years	2 Years	1 Year

Bench Charger

Specifications	Input	Output	Battery Range (Optimal)	Charging Cable Length	Dimensions, inches	Shipping Weight, lb (kgs)
EEBC61210	120V AC, 60 Hz, 4.4A	6V or 12V DC, 1A–10A	25–200 AH	6.0'	10.75 L x 4.5 W x 7.875 H	4.94 (2.24)

EEBC61210 Bench Top Battery Charger (Blue-Point®)
- Automatic operation plus an intelligent microprocessor-controlled charging sequence for use on a wide variety of battery types
- Charge conventional, maintenance-free, AGM, gel cell, deep cycle and marine batteries
- Simply select the correct battery size: Charger will initiate the automatic charging process

EEBC61210

Battery Maintainers

EEBM500 4A 6/12 Volt Battery Maintainer
- Fully automatic 6V/12V operation, 4A charging rate
- Compatible with conventional, maintenance-free, AGM, gel cel, spiral wound and deep cycle batteries
- LED charging status indication
- Includes quick connect output cord with clamp set, ring terminal set and 12V adaptor output accessories
- Ergonomic design with large buttons for easy use while wearing gloves
- Reverse polarity and battery fault warnings

EEBM500-1 Clamp Set
EEBM500-2 Ring Kit
EEBM500-3 12V Plug

EEBM500

Power Inverters

EEPI175 Power Inverter
- 175 watt power inverter provides 110V AC power inside your vehicle
- Plugs into vehicle 12V power outlet
- Convenient size fits in cup holder
- Two USB ports to power small electronic devices

EEPI175CAMO Power Inverter
- Camouflage pattern, same features as EEPI175

EEPI2250 Power Inverter
- 2,250 watts of continuous power and 4,500 watts peak power to run a wide variety of tools, electronics and appliances
- Stable, clean and reliable power with high surge capacity for use in the most demanding applications
- Precise electronics to enable proper charging of electronics: laptops, cell phones and gaming devices
- Three 120V AC outlets
- For tow trucks, fleets, construction vehicles and military use
- Unit must be hard wired into vehicle

EEPI175

EEPI175CAMO

EEPI2250

WARNING
- Charger must be OFF when connecting or disconnecting leads
- Avoid overcharging batteries
- Read safety precautions on pages W1 to W4

BATTERY SYSTEM TESTERS

EECS306C

EECS306C-CVR

D-TAC™ Battery System Diagnostic Tester/ Charger/Engine Starter

EECS306C *D-TAC* Elite

- *D-TAC* Elite is a diagnostic charger, battery, starting and charging system tester, engine starter, DMM, cable voltage drop tester with flash reprogram mode and more
- EECS306C *D-TAC* Elite includes EECS304C MicroVAT™ ELITE Tester, EECS306C-5 Battery Test Cables (10'), EECS306C-6 Post Adaptors and EECS500-1 Printer Paper Roll
- Integrated printer and cart
- Multitasking, once a diagnostic charge session has been started, the *MicroVAT* Elite (top analyzer) can be removed from the charger and used to diagnose other vehicles while the charger continues to diagnose and charge the original battery
- Conductance and deep scan battery test technology with 150A load capability (clicking sound heard when load is applied)
- Diagnostic Charge Cycle continuously monitors battery watching trends while maximizing charge acceptance minimizing charge time
  –No wasted time trying to charge defective batteries
  –Temperature (temperature sensor built into unit)
  –Will not damage a battery during the charging process
- Charging System Test uses the most innovative and decisive method, digital signal processing
- Cable Voltage Drop Test determines health of vehicle battery cables (with optional EECS306C-3 Cables)
- Built-in printer provides test results and custom shop information
- 3 1/2" large full color 1/4" VGA display, color icons and test result graphs
- Visual and voice prompts in English, Spanish, French, Italian, Dutch or German help you through the diagnostic process
- Digital Multimeter (with optional EECS306-4 Lead Set)
  –Low volt automotive, amps, ohms, diode and basic oscilloscope
  –Temperature via built-in infrared sensor or optional probes (EETH501C fluids, EETH502B surface, EETH503B air)
- USB and Infrared (IR) connectivity
  –USB software upgradeable for future enhancements
  –IR & Certificate printing on PC with optional EECS306C-7
- Heavy duty ready – for more accuracy and capability, add the optional EECS306C-2 Dual Range Amp Clamp and EECS306C-3 Cable Voltage Drop Test Cables
- UL®/CUL® listed
- Patents pending

EECS306C-CVR Protective Cover

SS3242 Instructional DVD

EECS304C

MicroVAT ELITE Battery Starting/Charging System Tester

EECS304C *MicroVAT* Elite Tester

- The *MicroVAT* ELITE is a battery, starting and charging system tester, DMM, cable voltage drop tester and more
- Charging system test uses the most innovative and decisive method – digital signal processing
- Cable voltage drop test – determine health of vehicle battery cables with optional EECS306C-3 cables
- Built-in printer – provides test results and custom shop information
- 3 1/2" large full color 1/4" VGA display – color icons and test result graphs
- Visual and voice prompts in English, Spanish, French, Italian, Dutch or German help you through the diagnostic process
- Digital multimeter (with optional EECS306C-4 lead set)
  –Low volt automotive, amps, ohms, diode and basic oscilloscope
  –Temperature via optional Snap-on® probes or built in infrared sensor
- USB and infrared (IR) connectivity
  –USB software upgradeable for future enhancements like hybrid
  –USB data collection: use any thumb drive to move info to excel
  –IR & certificate printing on PC with optional EECS306C-7
- Heavy duty ready – for more accuracy and capability, add optional EECS306C-2 dual range amp clamp and EECS306C-3 cable voltage drop test cables
- Upgrade your EECS304C *MicroVAT* Elite to EECS306C *D-TAC* Elite by ordering EESC304-306
- CE – DE, ES, FR,IT, GB, NL and JP
- Patents pending

TECHNICAL SUPPORT 1-866-592-8052

EECS150

EECS350

EECS550

EECS750

Specifications	EECS150	EECS350	EECS550	EECS750	EECS304C
Model	Basic	Enhanced	Wireless	Advanced	Microvat
CCA Range	100–1,400	100–1,700	100–2,000	100–2,000	100–2,000
CCA Input	•	•	•	•	•
Volts	12	6/8/12/24	6/8/12/24	6/8/12/24	6/12/24
Rating Systems	SAE, EN, IEC	SAE, EN, IEC, DIN, JIS	SAE, EN, IEC, DIN, JIS	SAE, EN, IEC, DIN, JIS	SAE, EN, IEC, DIN, JIS
Battery Types	Standard, AGM	Standard, AGM, EFB	Standard, AGM, EFB	Standard, AGM, EFB	Standard, AGM
Battery Packs	No	No	Yes Series	Yes Series/Parallel	Yes Series
Displays Battery Condition	•	•	•	•	•
Displays Battery Voltage (SOC)	•	•	•	•	•
Display % of CCA	•	•	•	—	—
Tests Discharged Batteries	•	•	•	•	•
Reverse Polarity Protection	•	•	•	•	•
Cable Integrity Technology	•	•	•	•	•
Displays State-of-Charge Graph	—	•	•	•	•
Detects and Displays Bad Cell	—	•	•	•	•
Temperature Compensation	—	•	± 32 °F	4 ranges	X – IR Temp Measured
Poor Connection Detection	—	•	•	•	•
Custom Header / Shop Info	—	•	•	•	•
Retention Magnet	—	•	•	Hanger	•
Post Adaptors	—	•	•	•	•
Surface Charge Warning	—	—	•	•	•
Integrated Printer	—	—	—	•	•
Voice Prompts	—	—	—	—	•
System Test	Yes – voltmeter	Yes – starting/ charging/ripple voltage	Yes – starting/ charging/ripple voltage	Yes – menu driven routine w/ ripple detection and graph	Yes – menu driven routine includes DSP technology, advanced alternator diagnostics
Printer Capable	None	Opt., IR printer or PC	IR to PC	Integrated	Integrated
Communication	—	IR	IR, Bluetooth	IR, USB	IR, USB
Wireless Controller	—	—	Included Bluetooth	No	No
Display	LCD backlit (3.1" diag.)	LCD backlit (3.1" diag.)	LCD backlit (3.1" diag.)	Color 3 1/2"	Color 3 1/2"
Clamps	Small	Medium	Medium	Large	Large
Cable length	2' Fixed	4' Fixed	2' Fixed	10' Replaceable	10' Replaceable

Battery System Testers

- Horizontal hand hold position with easy thumb-access buttons to enhance the user experience
- Superior accuracy with CCA required input and conductance technology for rendering battery, starter and charging system status

D-TAC™/MicroVAT™ Optional Accessories

EECS306C-2 Amp Clamp
- High (0A–700A); Low (0A–70A)

EECS306C-3 Cable Drop Cables
- Cable voltage drop test cables for EECS306C *D-TAC* Elite and EECS304C *MicroVAT* Elite

EECS306C-4 Multimeter Probes
- Digital multimeter probe set for EECS306C *D-TAC* Elite and EECS304C *MicroVAT* Elite

EECS306C-5 10 ft Test Cables
- Battery test cables for EECS306C *D-TAC* Elite and EECS304C *MicroVAT* Elite. 10' long (included)

HHGA-PRINTER Infrared Printer
- Optional printer for EECS350 & EECS550.

HHGA-18 Paper Roll
- Replacement paper roll

EECS306C-6 Post Adaptors Included
- Clamp-on inductive low-amp probe for old EECS306B series *D-TAC* plus battery systems testers and EECS304B1B *MicroVAT*
- 0A–15A range for testing low current circuits
- 5' length; 10 mA resolution

EECS306C-7 IR Dongle
- Cable voltage drop test cables for EECS306C *D-TAC* Elite and EECS304C *MicroVAT* Elite

EECS304C-1 Soft Storage Case
- Soft-sided carrying case for EECS304C *MicroVAT* Elite.

EECS500-1 Printer Paper
- For EECS304C and EECS306C.

EECS306C-2

EECS306C-3

EECS306C-4

HHGA-PRINTER

WARNING

- Charger must be OFF when connecting or disconnecting leads
- Avoid overcharging batteries
- Read safety precautions on pages W1 to W4

BOOSTER PACKS

EEJP500

EEJP500V24

EEJP500iCAMO

Portable Booster Packs

- Complete jump pack lineup: 12V, 24V and one for hunting, camping and emergency 110V AC power

Specifications	EEJP500	EEJP500V24	EEJP500iCAMO
Battery Size	22 aH	22 aH (2 each)	22 aH
Cranking Amps	330	500	330
Cold Cranking Amps	275	415	275
Built-in Charger (requires heavy duty shop cord)	Yes	Yes	Yes
Charger	3 Amp 110 VAC	3 Amp 110 VAC	3 Amp 110 VAC
Automatic	Yes	Yes	Yes
12 Volt Cord Included	EEJP500-8	EEJP500-8	EEJP500-8
Cable Length (Positive and Negative)	60”	60”	48”
Cable Gauge	4-gauge	2-gauge	4-gauge
Charge Indicator	Digital	Digital	Digital
12 Volt Outlet	Yes	Yes	Yes
Weight, lb	28	44	34
Reverse Polarity (off position only)	Audible	Audible	Audible
On-Off Switch	Yes	Yes	Yes
Digital Readout	Yes	Yes	Yes
Volt Meter for Internal and vehicle battery	Digital	Digital	Digital
% of Charge Indicator for internal battery	Yes	Yes	Yes
Vent/Cooling Fan	Yes	Yes	Yes
Dual 110V AC Recepticles, 400W Inverter	—	—	Yes
USB Port	—	—	Yes
Flex Light	—	—	EEJP500LITE

EEJP500 Jump Pack (12 Volt)

- For powerful starting of multiple vehicles
- Powerful 330 cranking amps and 275 cold cranking amps from high output AGM battery
- Smart multi-function digital display indicates internal battery percent of charge and voltage, plus vehicle battery voltage

EEJP500V24 Jump Pack (12 and 24 Volt)

- Heavy Duty starting for heavy duty vehicles
- Powerful 500 cranking amps and 415 cold cranking amps from twin high output AGM batteries
- Smart multi-function digital display indicates internal battery percent of charge and voltage, plus vehicle battery voltage
- Tough two-gauge, long reach 60" cables for connection to hard-to-reach batteries

EEJP500iCAMO Power Invertor (12 Volt)

- Great electricity source during a power outage
- Powerful 330 cranking amps from high output AGM battery
- Smart multi-function digital display indicates invertor wattage, internal battery percent of charge and voltage, plus vehicle battery voltage
- Versatile Unit includes 400 Watt Power Inverter with Dual 110V AC receptacles and halogen flex neck lamp
- USB Port for powering or recharging portable electronic devices

TECHNICAL SUPPORT 1-866-713-6007

Portable Booster Packs

EECS309B Portable Booster Pack
- 1,700 amp peak amp battery power for quick starting power – works on even deeply discharged batteries
- 30" four-gauge clamp leads (included) are detachable, via heavy duty brass sockets for easy field replacement of cables
- Two insulated posts provide secure separation and storage for the clamps, when not in use
- 12V socket allows recharging, and also provides a 12V source to power external devices, such as radios, lights, etc. (5' power cord included)
- Fast recharge via 120V 4 amp wall charger; includes charging status indicator lights

Optional Accessories:

EECS309B-5 Positive Lead and Clamp 60"

EECS309B-6 Negative Lead and Clamp 60"

EECS309B-9 Motorcycle Leads (positive and negative)

EECS309B

EECS660 Portable Booster Pack (Blue-Point®)
- 1,700 peak for starting power in heat or cold
- Long reach 46" four-gauge cables
- Industrial grade clamps grab and hold on battery terminals
- Quickly plug heavy duty shop extension cord into front of unit for built-in charging
- 12V DC power for convenience

EECS660

EEJP111M USB Charger/Mini Jump Starter *(Blue-Point)*
- Small light weight Lithium-ion pack for charging phones, starting stalled cars and more
- Ideal for personal use emergency jumps on power sport, motorcycle and 4/6 cylinder vehicles
- Scrolling display with user instructions
- USB port 5V DC, 2A for charging devices
- Ultra bright LED hazard or work light
- Memory saver compatible (order EECS5MEM OBDII cable)
- 12V port and AC charger included

TECHNICAL SUPPORT 1-866-328-2921

EEJP111M

Cables/Clamps

- Superior booster cables with heavy gauge 100% copper stranding
- Clamp bodies are fully insulated and have recessed copper jaws
- Heavy duty clamp springs bite securely on top or side battery posts

BC20500 Booster Cable Set
20' long, four-gauge, 413 strands copper wire

BC15500 Booster Cable Set
15' long, four-gauge, 329 strands copper wire

BC25500P Plug In Style Booster Cables
- Starting cable and connection harness
- Heavy-gauge 25' cables plug into bumper mounted socket to reach any stalled vehicle without having to lift the truck's hood
- Polarized socket mounts to service truck bumper and connects to truck battery
- 500A clamps are fully insulated with vinyl four-gauge, 413 strands of copper wire

YA159A Cable Clamp Set
One pair of heavy duty, copper jaw clamps. 500A clamps, 100% copper live jaw

BC20500

BC25500P

⚠WARNING

- Do not short portable booster pack leads against each other
- Avoid overcharging batteries
- Read safety precautions on pages W1 to W4

BATTERY SERVICE TOOLS

MT302BR

Hard Grip Handle Colors

Red	Orange	Green	Yellow
R	O	G	Y

ADD SUFFIX TO STOCK NUMBER FOR SPECIAL COLORS

Remote Start Switch

- 5' leads allow safer engine cranking while beneath or beside the vehicle so hands are away from belts and moving parts
- Switch housing prevents dirt and moisture from affecting the switch
- Heavy duty contacts reduce arcing
- Safety shield helps prevent accidental activation
- Switch rated at 40A at 12V or 20A at 24V
- Patented Instinct® comfort-designed handle

Applications:

- To "bump" the engine to inspect, align and/or remove parts
- Start the engine from under the hood with the key on

Stock No.	MT302B
Voltage	6V, 12V and 24V
Cord Color	Black
Cord Type	Straight
Cord Material	EDPM
Cord Length, feet	5 ft (1.5m)
Wire Gauge	12
Switch Amps	40A @ 6V and 12V; 20A @ 24V
Outside Wire Diameter	0.2 in (5 mm)
Handle Type	*Instinct*
Handle Color	Red, Orange, Green, Yellow
Terminal Clip	Copper
Boot Material	Flexible Composite
Overall Length	5 ft, 5 in (1.65 m)
Weight	0.82 lb (0.37 kg)

MT302BR Remote Start Switch, Red Handle
MT302BG Remote Start Switch, Green Handle
MT302BO Remote Start Switch, Orange Handle
MT302BY Remote Start Switch, Yellow Handle

2004BSKA

2005BSKA

Service Kits

2004BSKA Battery Service Kit, 4 pc

Includes:
208BCP Angle Nose Pliers
BTC10 Side Terminal Cleaner
BTC3A Terminal Brush
YA249 GM® Battery Terminal Wrench
C0410B Kit Bag

2005BSKA Battery Service Kit, 5 pc

Includes:
208BCP Angle Nose Pliers
B260A Cable Clamp Pliers
BTC10 Side Terminal Cleaner
BTC7B Terminal Cleaner
CJ92 Self Locking Cable Clamp
C0506 Kit Bag

208CCP

B260A

GA486A

CJ92

Cable Clamp Tools

208CCP Angle Nose Pliers

- Rounded nose protects battery from damage
- Jaws are offset 30° for better leverage
- 7 3/4" long

B260A Cable Clamp Pliers

- Spreads and cleans cable clamps
- Prybar on one end
- 7 3/8" long

GA486A Cable Clamp Puller

- Removes cable clamps without damaging posts
- 4" long

CJ92 Cable Clamp Puller

- Self-locking jaws securely grip terminal and pull without damage to post
- 1 3/4" spread

Terminal Tools (Blue-Point®)

BTC3A Terminal Brush
- Stiff wire bristles thoroughly clean posts and clamps
- 3 3/8" long

BTC7B Terminal Cleaner
- Cleans posts and cable clamps
- Includes a small, circular wire brush with protective cap to clean side terminals
- Plastic body

BTC8A Terminal Cleaner
- Cleans posts and cable clamps
- Plastic body
- 3 1/2" long

BTC10 Side Terminal Cleaner
- Cutters on one side clean battery contacts; brush cleans cable contact
- 4 1/2" long

YA9484 Battery Terminal Crimper
- Ideal for replacing or repairing battery cable terminal ends
- Design helps prevent overcrimping
- Terminal sizes 6 ga. through 4/0

YA249 Battery Terminal Wrench for GM® Battery
- Ratcheting box wrench design for use on *GM* side terminal batteries
- 5/16" hex, 5 1/2" long

YA249L Side Battery Terminal Wrench (5/16")
- Extra long (9 3/4") for connecting/disconnecting battery side terminals on 1994 and later Ford® Aerostar® vans and *GM* vehicles including: 1994 and later Pontiac® Grand AM®, Grand Prix®,"W" body cars, plus Buick® Regal®, Oldsmobile® Cutlass, Chevrolet® Lumina and Lumina APV
- 5/16" wrench size

BTC3A

BTC7B

BTC8A

BTC10

YA9484

YA249

YA249L

Hydrometers *(Blue-Point)*

BT101 Battery Hydrometer
- Determines specific gravity from 1.100–1.300
- No temperature tables required or difficult float reading to observe
- Design enables both customer and technician a viewing opportunity to see the state of the battery acid

BB4C Hydrometer/Thermometer
- Measures specific gravity from 1.100–1.300 and includes a quick reference, color coded "poor," "fair" or "good" scale plus a temperature correction scale
- 14 3/4" long

BT101

BB4C

Fillers *(Blue-Point)*

BB6A Filler Bulb
- 6 oz fluid capacity
- Hard rubber stem features an overflow for dripless filling
- 10 1/2" long

GA207A Automatic Filler
- Insert spout into fill hole and press down
- Fills without overflow

BB6A

GA207A

Carrier *(Blue-Point)*

BL1B Battery Carrier
- For top post and side terminal batteries
- Rubber pads securely grip battery widths from 5"–7"
- Plastic hand grip provides a firm hold

BL1B

⚠WARNING

- Plastic coating on handle does not protect against electric shock
- Avoid overcharging batteries
- Read safety precautions on pages W1 to W4

THE LATEST A/C TECHNOLOGY. NOW THAT'S COOL.

When your air conditioning equipment does most of the work automatically, that means A/C with a great return on investment. Couple that with hand-held equipment that delivers quick, accurate results, and you have a very cool system.

A/C Recyclers and Leak Detectors — Designed and manufactured to meet all current EPA and SAE standards, reduce refrigerant usage in your shop, and protect the ozone; SAE J2791 and J2913 certified detectors are also available, which uncover the smallest of leaks.

System Coverage — From vacuum pumps and manifold sets to UV leak detection kits and digital thermometers, your A/C needs are covered.

REDUCE CALLBACKS.

You have enough to do without doing the same job twice. But with accurate Snap-on® A/C equipment, make a drastic cut back on callbacks. With microprocessor-controlled operation and automatic detection mechanisms, you're working with smarter equipment.

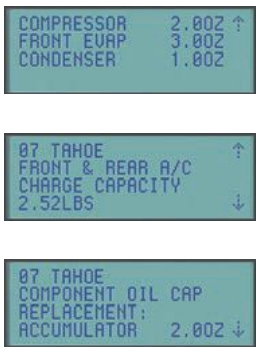

EEAC325B

EEAC325BH

KOOL KARE™ PLUS A/C Service Center (R134a)

Specifications	EEAC325B	EEAC325BH
Operating Temperature Range	50 °F–120 °F (10 °C–49 °C)	50 °F–120 °F (11 °C–49 °C)
Relative Humidity	Up to 80% non-condensing	Up to 80% non-condensing
Operating Pressure	450 PSI (max.)	450 PSI (max.)
Storage Temperature Range	-4 °F–140 °F (-20 °C–60 °C)	-4 °F–140 °F (-20 °C–60 °C)
Compressor	1/3 HP, 1.1 CFM reciprocating	1/3 HP, 1.1 CFM reciprocating
Vacuum	28 inches Hg at sea level	28 inches Hg at sea level
Vacuum Pump	1/3 HP, 3.0 CFM, reciprocating, 40 microns	1/3 HP, 3.0 CFM, reciprocating, 40 microns
Gauge Ranges	High Side: 500 PSI (34 BAR) max. / Low Side: 350 PSI (24 Bar) max.	High Side: 500 PSI (34 BAR) max. / Low Side: 350 PSI (24 Bar) max.
Recovery Amount	23 lb (10.43kg)	23 lb (10.43kg)
Recovery Rate	1 lb per minute (max.)	1 lb per minute (max.)
Refrigerant Charge Amount	0–22 lb (9.98 kg) max.	0–22 lb (9.98 kg) max.
Onboard Refrigerant Capacity	30 lb (14 kg)	30 lb (14 kg)
Charge Oil Bottle	12 oz (360 ml)	12 oz (360 ml)
Drain Oil Bottle	12 oz (360 ml)	12 oz (360 ml)
Dimensions	34" D x 46" H x 24" W	34" D x 46" H x 24" W
UV Oil Dye Injection	Yes	Yes
Warranty	2-Year	2-Year
Vehicle Database	Yes	Yes

TECHNICAL SUPPORT 1-866-769-2788

EEAC325A1 – Spin on filter dryer for EEAC324A/EEAC324B and EEAC325A/EEAC325B A/C Recyclers. Avoid A/C recycler downtime. Keep extra EEAC325A1 filters on hand, since the new SAE J-2788 standard requires filter dryer replacement after 150 lb of refrigerant used. Filter life prompt occurs when 100 lb of refrigerant have been filtered. Mandatory filter lockout will occur after 150 lb of refrigerant have been filtered.

EEAC325B/EEAC325BH Shared Features:
- Fully automatic air purge and built-in oil injection
- Meets SAE J-2788 standard of 95% refrigerant recovery and ± .5 oz charge accuracy
- 20% increase in refrigerant recovery saves refrigerant
- Increased charge accuracy reduces A/C repair call backs
- Extra long 11 1/4' hoses for heavy duty applications
- Microprocessor controlled operation
- SAE®, UL® and CSA® listed
- Simple, menu driven operation
- Automatic high pressure and tank shutoff
- Automatic purge of air and other non-condensable gases
- Multilingual (English, Spanish, French)
- Complete auto sequence programmability
- Larger gauges, larger 4 x 20" display and vacuum leak test
- Vehicle database from 1995–2009 for refrigerant and oil specifications

EEAC325B Only Features:
- Imports charge capacity directly into charge mode
- Programmable vacuum hold time
- Upgradeable software

EEAC325BH Only Features:
- Do not turn any vehicles away from the shop
- One machine that services both conventional vehicles and hybrids properly and safely
- Menu selectable function gives user ability to clear residual oil from A/C Recover, Recycle, and Recharge machine's fluid circuit and hoses minimizing risk of oil cross contamination

Includes:
- A/C capacities database that enhances productivity
- Automatic air purge
- Recovery accuracy ± 1.0 oz
- Charge accuracy ± 1/2 oz
- Protected by two-year warranty

EEAC325A1 Filter Dryer
- Use on EEAC324A/EEAC324B and EEAC325A/EEAC325B
- Mandatory filter lock out will occur after filtering 150 lb of refrigerant

EEAC325B2 High side service hose
EEAC325B3 Low side service hose
EEAC325A4 Oil drain bottle
EEAC325A5 High side service coupler
EEAC325A6 Low side service coupler

⚠WARNING

- Wear safety shield (user and bystander)
- Read safety precautions on pages W1 to W4

AIR CONDITIONING: RECYCLING/RECHARGING SYSTEMS (R134A)

EEAC324B

ECO™ PLUS A/C Service Center (R134a)

EEAC324B A/C Service Center

- Great performance at a semi-automatic value price
- Intuitive interface uses up/down screen menu options
- Menu display guides technician through service process

Specifications	EEAC324B
Operating Temperature Range	50 °F–120 °F (10 °C–49 °C)
Relative Humidity	Up to 80% non-condensing
Operating Pressure	450 PSI (max.)
Storage Temperature Range	-4 °F–140 °F (-20 °C–60 °C)
Compressor	1/3 HP, 1.1 CFM reciprocating
Vacuum	28 inches Hg at sea level
Vacuum Pump	1/4 HP, 1.5 CFM, reciprocating, 40 microns
Gauge Ranges	High Side: 500 PSI (34 BAR) max. / Low Side: 350 PSI (24 BAR) max.
Recovery Amount	23 lb (10.43 kg) max.
Recovery Rate	1 lb Per minute (max.)
Refrigerant Charge Amount	0–22 lb (9.98 kg) max.
Onboard Refrigerant Capacity	30 lb (14 kg)
Charge Oil Bottle	12 oz (360 ml)
Drain Oil Bottle	12 oz (360 ml)
Dimensions	34" D x 46" H x 24" W
UV Oil Dye Injection	Yes
Warranty	2-Year
Vehicle Database	No

TECHNICAL SUPPORT 1-866-769-2788

Service Center Accessories

EEAC325ACV A/C Service Center Cover
- Protects EEAC324A, EEAC324B, EEAC325A, EEAC325B and EEAC325BH from dust, moisture and shop environments

EEAC325B2013 Database Update
- Vehicle Refrigerant and Oil Capacity Database Update
- Updated vehicle database now includes many US and Import vehicles through 2013
- Helps technician be more efficient and accurately charge a vehicle with the proper amount of refrigerant by putting information right at their fingertips
- Saves money and potential AC system problems by preventing overcharging
- Database additions cover approximately 1,800 more vehicle/model combinations
- This database is specifically written and designed for the EEAC325B and EEAC325BH

Application:
- SD card contains updated database of vehicle A/C capacities (oil and refrigerant) for US and import vehicles as well as light trucks
- Sell EEAC325B2013 to customers who purchased their EEAC325B prior to January 1, 2014

ACTFILTERPL A/C Filter (Blue-Point®)
- Filters and separates A/C sealants, dyes, debris, lubricants and other contaminants
- Damage results from Type I sealants or Type II entering A/C service equipment from a vehicle during servicing
- ACFILTERPL not required or recommended for J2788 certified EEAC324A/EEAC325A and EEAC324B/EEAC325B recyclers

ACTFILTER1 Replacement Filter Kit
- Replacement filter for ACTFILTERPL

SS3294 A/C Merchandising Banner
- Durable, weather resistant plastic
- Measures 82" x 34"
- Includes 60" ropes at corners

EEAC325ACV

ACTFILTERPL



SS3294

Filter Dryers

EEAC325A1 Filter Dryer
- Use on EEAC324A/EEAC324B and EEAC325A/EEAC325B
- Mandatory filter lock out will occur after filtering 150 lb of refrigerant

EAK0095C01AB Filter Dryer
- Use on EEAC307C, EEAC308C and EEAC310A (R12 side)

EAK0095C02AB Filter Dryer
- Use on EEAC313A (R134a side)

EAK0030C01AB

Master Dryer Kit

EAK0030C01AB Master Dryer Kit
- Filter/dryer should be changed regularly depending on usage of unit
- Kit includes filter and instructions
- Use on EEAC301B, EEAC304D, EEAC313A (R12 side), EEAC316A, EEAC318A, EEAC319A and EEAC320A

EAK0030C02AB Master Dryer Kit
- Use on EEAC313A (R134a side)

EAK0029C01AB

Oil Change Kits

EAK0029C00AB Compressor Kit
- Use on EEAC308C, EEAC319A and EEAC320A

EAK0029C01AB Compressor Kit
- Use on EEAC310A, EEAC313A, EEAC316A, EEAC318A, EEAC324A/EEAC324B and EEAC325A/EEAC325B
- Includes two quarts of oil, parts and instructions

ACT71-0A Vacuum Pump Kit
- 32 oz bottle

ACT71-0A

WARNING
- Wear safety shield (user and bystander)
- Read safety precautions on pages W1 to W4

AIR CONDITIONING: SERVICE EQUIPMENT (R134A AND R1234YF)

ACT825

ACT795UVA

ACT785B

ACT760B

Refrigerant Gas Leak Detectors

Specifications	ACT825	ACT795UVA†	ACT785B†	ACT760B†
Sensitivity Range	0.05 oz/yr, medium 0.25 oz/yr, low 0.5 oz/yr	0.05 oz/yr (R134a)	.05 oz/yr (R134a), .03 oz/yr (R22)	.05 oz/yr (R134a), .03 oz/yr (R22)
UV Mode	12 UV LEDs	3 UV LEDs	—	—
UV Wavelength	385–410 nm	395–415 nm	—	—
Sensing Tip Life	>2,000 hours	>300 hours	>300 hours	>300 hours
Power Supply	2 "D" alkaline batteries	4 "AA" alkaline batteries	4 "AA" alkaline batteries	4 "AA" alkaline batteries
Battery Life	60 hours	8 hours continuous	8 hours continuous	8 hours continuous
Warm-Up Time	<40 seconds	<20 seconds	<20 seconds	<20 seconds
Automatic and Manual Calibration	Automatic	Yes	Yes	Yes
Probe Length inches	15.5	17	17	17
Weight, lb (kg)	1.8 (0.8)	1.5 (.68)	1.5 (.68)	1.5 (.68)
Warranty	3 Years	3 Years (2 on Sensor)	3 Years (2 on Sensor)	3 Years (2 on Sensor)
Numerical Display	Vertical Color Coded Signal Level Bars	7 segment digital display (1–9)	7 segment digital display (1–9)	—
Alarm Near Sensor	Alarm on microprocessor	Visual probe LED	Yes	—
Carrying Case	Included	Included	Included	—

† CE

ACT825 Heated Sensor Leak Detector

- SAE® Certified Electronic Leak Detector with Color LCD display
- Displays relative magnitude of leaks detected
- Displays unit readiness – Wait, Ready or Interference
- Low, Medium and High sensitivity with visual indication
- Displays the selected mode – Peak, Hold or Mute
- Displays accumulated sensors hours on request with low battery indicator
- Large Color LCD Display
- Flexible 15.5" probe

ACT795UVA Heated Sensor Leak Detector

- Patented three LED UV lights 385–415 nm wavelength for optimum air conditioning dye fluorescence
- No UV enhancement eye glasses needed
- Detects all commercially available dyes
- Unique digital alarm with numeric leak size indicator
- Long life, stable sensor
- Automatic and manual* calibration and reset to ambient levels
- Three adjustable sensitivity levels
- True mechanical pump
- Low battery indicator
- *SAE* J2791 (R134a) and *SAE* J2913* Certified
- Mute feature

ACT785B Heated Sensor Leak Detector

- Unique digital alarm with numeric leak size indicator
- Long life, stable sensor
- Automatic Calibration – Useful in heavily contaminated areas. The unit automatically recalibrates (re-zeroes) to ambient levels, which stops the constant alarm, only responding to higher levels of refrigerant and allows searching for the true source of the leak
- Manual* Calibration – Useful for smaller leaks. This also allows for recalibration to ambient levels, but only when the user chooses to do so. User may want the calibration to remain constant when searching for small leaks
- Three adjustable sensitivity levels
- True mechanical pump
- Low battery indicator
- *SAE* J2791 (R134a) and *SAE* J2913 (HFO-1234yf) Certified, EN14624 Certified
- Mute feature
- Garage tough
- Visual LED leak alarm near sensor
- Carrying case included
- Inspection light utilizing bright 6,000 MCD LEDs
- CE approved

ACT760B Heated Sensor Refrigerant Leak Detector

- Heated Sensor Technology
- Long life, stable sensor
- Automatic and manual calibration and reset to ambient levels
- Three adjustable sensitivity levels
- True mechanical pump
- Low battery indicator
- *SAE* J2791 (R134a) and *SAE* J2913* (HFO-1234yf) Certified
- Mute feature
- Garage tough

*Added Feature

ACT120A

Electronic Charging Scale (Blue-Point®)

ACT120A Electronic Refrigerant Scale
- Use with R12 or R134a refrigerants
- Reads transfer amount during charging or recovery operations
- Reads in pounds or kilograms
- Auto off function after three hours

Specifications	ACT120A
Capacity, lb (kg)	240 (110 Kg)
Accuracy	±.16 oz (±0.01 kg) or 0.1% of reading (whichever is greater)
Resolution	0.01 lb (0.01 kg)
Operating Temperature	32 °F–120 °F (0 °C–49 °C)
Platform	9" (228.6 mm) square
Power Supply	9V battery (included)
Battery Life	Approx. 40 hrs

ACTUVPROKT

Metered UV Injection Kit

ACTUVPROKT Metered UV Injection Kit
- New technology dye injection solution
- One precise squeeze of trigger per application
- More accurate than caulk style guns
- Includes high capacity 12 oz cartridge that covers 96 applications

ACTUVPRO12 Dye Cartridge (12 oz)
- 12 oz dye cartridge for ACTUVPROKT

ACTUVPRO Injection Gun, Hose, Coupler
- Injection gun only for ACTUVPROKT

ACTUVQUADKT

ACTUVINJKTA

ACTUVMINI4

Ultraviolet Leak Detector Kits (LED Light) *(Blue-Point)*

ACTUVQUADKT UV Leak Detection Kit
- Includes four LED UV light, mini dye injector, A/C dye cartridges, hose with R134a coupler, R12 adaptor, 1 oz of coolant dye, 1 oz of oil/fuel/ATF dye, 10 A/C service labels and UV glasses

ACTUVMINI4 Mini LED UV Flex Light and UV Goggles Kit
- Bright LED light with 12" flexible probe gets in tight spots
- Comfort grip light handle with conveniently located on/off button
- Includes flex light and UV safety glasses

ACTUVC10 Dye Cartridge
- Ten-application dye cartridge with ten A/C service labels

ACTUVINJKTA A/C Leak Detection Kit
- Detects A/C refrigerant leaks quickly and easily
- Universal A/C dye is SAE® certified and OEM approved

Includes:
- Universal A/C dye to service up to 40 vehicles ACTUVKITRHT for refills
- Exclusive gun style injector and dye cartridge
- Powerful 1 W Luxeon® light
- Compatible with fluorescent dyes
- UV Glasses
- Convenient storage case
- R134a adaptor
- Service stickers

ACTUVKITRHTA Dye Cartridges, 1 oz (Qty 4)

⚠WARNING
- Wear safety shield (user and bystander)
- Read safety precautions on pages W1 to W4

AIR CONDITIONING: SERVICE EQUIPMENT (R134A AND R12)

ACTUVDYEKIT

Ultraviolet Leak Detector Kits (High Intensity Light)

ACTUVDYEKIT UV Leak Detection Kit
Includes high intensity light (ACTUVDYEKIT1), dye injector and cartridge with 25 applications, hose with R134a coupler (ACTUVDYEKIT2), R12 adaptor (ACTUVDYEKIT4), (25) A/C service labels (ACTUVDYEKIT5), UV safety glasses (GLASS20BKY) and storage case (ACTUVDYEKIT6).

ACTUVDYEKT1 High Intensity UV Light
- High intensity 12V DC/50 W compact light gets in tight spots
- Coiled cord extends to 14' with clips for attachment to battery

ACTUVDYEKT2 Injection Hose
- Hose with R134a coupler for ACTUVDYEKIT

ACTUVDYEKT3 Replacement Injector Handle
- Replacement injector handle for dye injector in ACTUVDYEKIT

ACTUVDYEKT4 R12 Adaptor
- R12 adaptor for ACTUVDYEKIT

ACTUVDYEKT5 A/C Service Labels
- Pack of 25 A/C service labels for ACTUVDYEKIT

ACTUVC25 Dye Cartridge
- 25-application dye cartridge with (25) A/C service labels

GLASS20BKYA Safety Glasses
- Black frame with amber lens

ACTUVKITC

Ultraviolet Leak Detector Kits

- Inject dye in low side port on automotive A/C system, circulate and check for leaks with the UV Mini Light
- Detect leaks as slow as 1/4 oz per year
- Use optional dyes to check for leaks in engines, transmissions, hydraulic systems and power steering systems

ACTUVKITC R12/R134a UV Leak Detection Kit (Blue-Point®)
Includes:
ACTUVGUN Injection Gun Kit *(Blue-Point)*
ACTUVGUN3 Injection gun *(Blue-Point)*
ACTUVGUN5 R134a Injection gun adaptor *(Blue-Point)*
ACTUVGUNA9 R12 System injection gun adaptor
ACTUVGUNB8 Universal dye cartridge (8 oz)
- Universal dye cartridge
- 64 applications
- SAE®-J2297 certified and OEM approved dye
- Service stickers included

ACTUVLITE4 UV Enhancing Glasses *(Blue-Point)*
ACTUVLITEA8 Swivel head UV light (12V, 50 W) *(Blue-Point)*
ACTUVGUNA Injection Gun Kit *(Blue-Point)*

ACTUVGUNB8

ACTUVGUNB

Ultraviolet Leak Detector Dye Cartridges/Accessories

Stock No.	Description
ACTUVGUNP1	PAG Oil Cartridges/46 Viscosity (six, 8 oz)
ACTUVGUNP2	PAG Oil Cartridges/100 Viscosity (six, 8 oz)
ACTUVGUNP3	PAG Oil Cartridges/125 Viscosity for GM® (six, 8 oz)
ACTUVGUNP4	PAG Oil Cartridges/150 Viscosity (six, 8 oz)
ACTUVGUNE1	Ester Oil Cartridges/100 Viscosity (six, 8 oz)
ACTUVGUN2	Universal A/C Dye Cartridge (4 oz)
ACTUV10PAK	Universal Dye Cartridges (ten, 1/4 oz)
YAUVCOOL	Coolant Dye Cartridges. (six, 1 oz)
YAUV4N1	Engine/Transmission/Hydraulic/Power Steering Accessory Dye Cartridges (six, 1 oz)
ACTUVKITJR1	A/C Dye Cartridges (six, 1/4 oz)
ACTUVKITJR2	A/C Dye Cartridges (six, 1 oz)

Universal AC Dye

ACTR53625 Universal A/C Fluorescent Dye, 2 oz
- Universal Dye for Automotive and HVAC A/C Systems
- Cost efficient Concentrated Formula – SAE® Approved J2297 Dye
- 25 applications per 2 oz bottle, 1/12 oz per application
  – Automotive: One application equals 1/12 oz (2.5 ml), per 10 oz (300 ml) oil
  – HVAC: One application equals 1/12 oz (2.5 ml) per 7 lb (3.2 kg) refrigerant
- Inject this dye using any standard dye/oil injector including recommended Snap-on® injector Part #ACT53134A
- Compatible with all oils

Applications:
Inject 1/12 oz of concentrated dye into Automotive or HVAC A/C system. Allow to circulate throughout system. Use UV light to locate leak in A/C system.

ACTR53625

Hybrid A/C Compressor Oil

ACT92707 Synthetic Hybrid A/C Compressor Oil
- High Dielectric formula provides advanced Hybrid A/C compressor protection
- Formulated for vehicles with electric A/C compressors
- Provides outstanding lubricity and compressor protection
- High Dielectric nonconductive formula
- Contains conditioners, inhibitors and anti-wear agents

Applications:
Used to recharge or top off electric A/C compressors oil charge

ACT92707

Ultraviolet Flashlights (Blue-Point®)

ECFUV150 UV Leak Detection Flashlight
- Very high intensity LED technology
- 15x brighter than regular LED lights
- Power comparable to 150 W lamps
- Inspection range of up to 20'
- Compatible with all standard dyes
- Fluorescence enhancing glasses and charger included

ECFUV150

ECFUVDUAL UV Leak Detection Flashlight
- Pinpoints A/C, oil, fuel, ATF, PS, hydraulics, coolant and auto body leaks
- Use with blue lamp with fluorescent dye, white lamp for general component inspection
- 100,000 hour LEDs never need replacing
- UV inspection range up to 6' (1 m–8 m)
- Powered by three AAA alkaline batteries (included)
- Flashlight, holster and fluorescence enhancing glasses included

ECFUVDUAL

ECFUVLEDA UV Rechargeable Flashlight
- 400 nm wavelength – The sweet spot for A/C, oil and coolant dye leak detection
- 95-minute run time at constant power output
- Plug in charger and UV-enhancing glasses included
- Focusing lens enables broad and narrow searches
- Lithium Ion battery
- Compact aluminum housing
- On/Off switch located on handle

ECFUVLEDA

ECFUV17 True UV Flashlight
- 17 true LED bulbs provide impressive UV illumination
- Aluminum body with textured grip for durability and ease of use
- 25,000 hour bulb life for excellent reliability
- Uses three readily available AAA alkaline batteries
- On/Off switch located on handle
- Amber UV safety glasses also included

Specifications
- UV Wavelength – 380–385 nm
- 25,000 hour LED bulb life
- 22 hours run time under normal work conditions

ECFUV17

⚠WARNING
- Wear safety shield (user and bystander)
- Read safety precautions on pages W1 to W4

AIR CONDITIONING: SERVICE EQUIPMENT (R134A, R12, R1234YF)

ACTR5150A

Digital Manifold Gauges (R134a)

ACTR5150A Digital Manifold Gauge Set (R134a) (Blue-Point®)

- Displays refrigerant and oil capacities
- Large easy-to-read LCD screen displays pressure and vacuum readings for R134a
- High quality aluminum block manifold
- Performs system leak check at conclusion of the evacuation process
- Heavy duty hook folds and stores on back
- Rubber boot for added protection
- Includes digital manifold, three 72" hoses and two manual couplers in a storage case

ACT51234A

ACTR1234YF

Manifold Test Gauge (R134a/R12)

ACT51234A R12/R134a Manifold Test Gauge

- Three sets of hoses (72" red and blue plus 96" yellow) permit true interchange between R12 and R134a refrigerants
- Large, 1/4 turn positive open/close manifold ball valves
- Oversize sight glass for easy flow viewing
- Extra large 80 mm gauge face for better visibility
- Manual high and low couplers for quick connections
- Nylon barrier hoses meet EPA®, SAE® and UL® standards

ACTR1234YF Manifold Gauge Set

- For vehicles using new 1234yf refrigerant
- Red and blue nylon barrier hoses with 12 mm – male fittings on both ends
- R1234yf high and low side couplers



ACTR9600

Heavy Duty Manifold Test Gauges

ACTR9600 Heavy Duty Manifold Set

- Heavy duty A/C manifold for large trucks, buses and reefer applications
- Larger profile aluminum block vs. smaller import blocks on competitive units
- Heavy duty conversion couplers for durability
- Couplers are spring loaded to prevent damage to valve cores
- Silicon dampened gauges for durability
- Extra-long 96" length Goodyear® hoses – one each: red, blue and yellow for added reach

ACTR5134A

ACTR4151A



ACTR4131A

Manifold Test Gauges (R134a)

ACTR5134A Manifold Gauge Set

- Extra large
- 80 mm gauge face and oversized sight glass for better visibility
- Large, 1/4 turn open/close manifold ball valves
- Manual high and low couplers for quick connections
- 72" red and blue nylon barrier hoses meet *EPA*, *SAE* and *UL* standards
- 96" yellow charging hose

ACTR4151A Manifold Gauge *(Blue-Point)*

- Manual couplers are spring-loaded to eliminate service valve damage
- Extruded aluminum body with solid brass fittings
- High side and low side silicon anti-flutter gauges (65 mm) reduce vibration
- Sight glass permits visual monitoring of refrigerant flow
- 96" yellow charging hose plus 72" red and blue hoses

ACTR4131A A/C Manifold Set (*Blue-Point*)

- Anti-flutter gauges smooth out needle movement
- Easy grip all-metal side-mounted knobs
- Piston type free-floating valves reduce O-ring wear
- Manual R134a couplers
- 60" red, blue and yellow inner nylon layer hoses meet *EPA*, *SAE* and *UL* standards
- Yellow hose includes shutoff valve

ACTR4772-3 High Side Quick Coupler

ACTR4772-2 Low Side Quick Coupler

ACT1234PKT

ACT91339

AC Service Kits

ACT1234PKT Manifold Repair Kit

- Includes various replacement lens, knobs, O-rings, gaskets and more
- Use to service ACTR4151, ACT9500C, ACTR5134 and ACT51234 manifold gauges

ACT91339 O-Ring Kit

- Complete O-ring assortment for use on R134a and R12 A/C systems. Included 18 common o-ring sizes (270 total).

Replacement Hoses (R134a)

- Low permeation hoses for internal equipment connections
- 1/2" ACME® fittings
- Hoses comply with SAE® J2197

ACTRR72 Replacement Hose, Red, R134a, 72"
Red, 6' length

ACTRR96 Replacement Hose
Red, 8' length

ACTRB72 Replacement Hose, Blue, R134a, 72"
Blue, 6' length

ACTRB96 Replacement Hose
Blue, 8' length

ACTRY72 Replacement Hose, Yellow, R134a, 72"
Yellow, 6' length

ACTRY96 Replacement Hose
Yellow, 8' length

ACTRB72

ACTRY96

Replacement Hoses (R12)

- 6' hoses include 1/4 turn manual shutoff valves
- Comply with *SAE* J2196
- 6' and 8' hoses also available with automatic shutoff valves

ACTB72 Replacement Hose (R12)
Blue, 6', 1/4 turn manual shutoff valve

ACTB72A Replacement Hose (R12)
Blue, 6', automatic shutoff valve

ACTR72A Replacement Hose (R12)
Red, 6', automatic shutoff valve

ACTY72 Replacement Hose (R12)
Yellow, 6', 1/4 turn manual shutoff valve

ACTY72A Replacement Hose (R12)
Yellow, 6', automatic shutoff valve

ACTB72

ACTR72A

ACTB72A

ACT2100

ACTMAN2100

A/C Hose Crimping Tools

ACT2100 Hydraulic A/C Hose Crimper Set (Blue-Point®)

- Recrimp or install most barbed and beaded fittings
- Allows user to create standard or custom length A/C hoses
- Set contains the hand-operated hydraulic crimping tool (ACT21001), four sets of dies for standard fittings and four sets of dies for reduced barrier fittings

ACTMAN2100 Manual A/C Hose Crimper Set *(Blue-Point)*

- Manual version of the ACT2100 hydraulic hose crimper
- Easily mounts to workbench or held securely in a vise
- Includes a complete set of dies covering standard #6, #8, #10 and #12 hose sizes

ACT21001 Crimping Tool

- Hand operated hydraulic A/C hose crimper used to recrimp or install new fittings on A/C hoses

Stock No.	Description	Fitting Size	Hose Size
ACT21003	Standard Die Set	#8	13/32"
ACT21004	Standard Die Set	#10	1/2"
ACT21005	Standard Die Set	#12	5/8"
ACT21006	Reduced Barrier Die Set	#6	5/16"
ACT21007	Reduced Barrier Die Set	#10	1/2"
ACT21008	Reduced Barrier Die Set	#12	5/8"

ACT28B

ACT9005

ACT9103

ACT9106

ACT9006

Vacuum Pumps (R12) *(Blue-Point)*

Specifications	No. of Stages	Free Air Displacement	Ultimate Vacuum	Motor	Pump Speed	Electrical Specs	Shipping Weight, lb
ACT28B	—	Air Operated	28 in Hg	—	—	—	5

Vacuum Pumps (R134a/R12) *(Blue-Point)*

Stock No.	No. of Stages	Free Air Displacement	Ultimate Vacuum	Motor	Pump Speed	Electrical Specs	Shipping Weight, lb
ACT9005	1	1.5 CFM	75 Microns	1/6 HP	3,450 RPM	110V 60 Hz	16
ACT9103	1	3 CFM	75 Microns	1/4 HP	1,720 RPM	110V 60 Hz	17
ACT9106	1	6 CFM	75 Microns	1/4 HP	1,720 RPM	110V 60 Hz	22
ACT9006	2	6 CFM	15 Microns	1/3 HP	3,440 RPM	110/220V 50/60 Hz	24.6

ACT9005 Vacuum Pump

- High efficiency, single stage 1.5 CFM pump
- Ultimate vacuum of 100 microns
- Three inlet port sizes: 1/4, 3/8 *SAE* and 1/2" *ACME*
- Gas ballast valve helps prevent oil contamination
- Easy access oil fill port
- 1/6 HP
- 120V AC motor
- Weight: 16 lb, oil capacity: 6 oz

ACT9006 Vacuum Pump

- High efficiency, two stage six CFM pump
- Ultimate vacuum is 25 microns
- Three inlet port sizes: 1/4, 3/8 *SAE* and 1/2" *ACME*
- Easy access oil fill port
- 1/3 HP 120V AC motor
- Weight: 38 lb, oil capacity: 8 oz

⚠WARNING

- Wear safety shield (user and bystander)
- Read safety precautions on pages W1 to W4

AIR CONDITIONING: SERVICE EQUIPMENT (R134A, R12, R1234YF)

ACT1297

ACT2105

ACT413A

ACT1300B

ACTR82375

ACT53134A

Valve Core Tools (R134a/R12)

ACT1297 Master Valve Core Tool Set (R134a/R12)

- Unique design offers locking device to hold shaft in place when removing or installing valve core
- Makes removal and installation of Shrader valve cores possible on fully charged systems

Includes:

- High side R12 adaptor for GM®/Ford® vehicles (1/4" x 3/16")
- High side R12 adaptor for *Ford* vehicles (1/4" x 1/8")
- R134a high side connector (16 mm)
- R134a low side connector (13 mm)
- 1/4" FL swivel connector
- Box for set component storage
- Large bore valve core remover/installer assembly for *GM* vehicles
- JRA R134a valve core remover/installer assembly
- Eton R134a low side valve core remover/installer assembly
- Eton R134a high side valve core remover/installer assembly

ACT2105 Orifice Tube Service Kit

- Install and remove any style orifice tube
- Remove broken screens and tubes
- Includes auger point shaft puller, for *GM* vehicles, brass extension, puller, remover arbor, remover nut and storage case

Can Tapper Valve

ACT413A Can Tap Valve

- Fits R134a (2 7/8"), R12 (2 1/2") and Oil (2") US standard charge cans
- Includes 1/2" ACME®-M and 1/4" FL-M ports
- Internal safety check valve prevents system backflow
- Composite construction with brass ports
- Includes insert for smaller cans

Seal and Clutch Service

ACT1300B A/C Clutch Remover Set

- Simplifies removal/installation of A/C compressor clutch and clutch plates
- Provides access to shaft seals
- For use with *Ford*, Chrysler® and *GM* vehicle A/C compressors

Oil and Dye Injectors

ACTR82375 Oil Injector (R134a only)

- Use to add refrigerant oil or large amounts of UV leak-detection dyes to A/C systems
- Quickly adapts to manifold gauge sets or charging equipment
- 1/2" *ACME* male x 13 mm R134a low side female threads
- 2 oz capacity
- R134a use only

ACT53134A Oil Injector

- Great for use on standard R134a, hybrid R134a and R1234yf systems
- Any dye/oil can be put into the AC53134A and injected into system
- Dye/oil can be injected in while system is under a vacuum, or against the pressure while the system is full and running
- Heavy duty anodized aluminum construction for years of reliable use
- Injection measurements in 1/10 oz for concentrated dye, 1/4 oz for standard dye and ml

AIR CONDITIONING: SERVICE EQUIPMENT (R134A, R12, R1234YF)

TEMP2A

TEMP10

ACT73A

ACT83A

ACT2030

Thermometers

TEMP2A Digital Thermometer (Blue-Point®)
- Use on A/C systems, cooling systems and other applications
- Reads temperature of liquids, solids and gases
- Easy to read display in °F and °C
- Magnet: cover holds unit in place
- Tip cover protects probe during storage
- Temperature ranges: -58 °F–300 °F (-50 °C–150 °C)
- Resolution: ± 0.1 °F (± 0.1 °C)
- Accuracy: ± 2.0 °F (± 1.0 °C)
- Response time: updates every 1.5 seconds
- Battery: MTACDC1-1 with 35-minute auto power off
- Probe length: 3 1/2" (89 mm)
- Overall length: 7" (178 mm) with case
- CE

TEMP10 Pocket Digital Thermometer *(Blue-Point)*
- Measures liquid, air and surface temperatures via sturdy stainless-steel probe
- Digital display for easy viewing
- Angled viewing head can be rotated 180°
- Convertible from Fahrenheit (F) to Centigrade (C)
- Temperature ranges: -58 °F–300 °F (-50 °C–150 °C)
- Plastic carrying sheath

ACT73A Dual Scale Dial Type Thermometer *(Blue-Point)*
- Range 0 °F–220 °F in 2° increments
- Checks temperature of condenser, outside air and cooling power
- 1 3/4" diameter

ACT83A Dial Type Thermometer *(Blue-Point)*
- Range 0 °F–220 °F in 2 ° increments
- Immerse stem about 2" in liquids, 4" in gases
- 1" diameter

ACT2030 A/C Temperature Tester *(Blue-Point)*
- Quickly and easily determine A/C system performance
- Microprocessor compares temperature at the A/C vent and outside ambient temperature
- Automatic shutoff
- Includes diagnostic chart and tech tips
- Powered by 9V battery (included)
- Range 32 °F–120 °F

R12 SERVICE TOOLS

ACT106B

ACT1009A

ACT1008A

ACT119

Adaptors/Valves/Connectors

ACT106B Expansion Tube Remover
- For most GM® vehicle models
- 4" long

ACT1009A Orifice Tube Remover
- Use as CCOT and FFOT screen extractor
- Use in conjunction with ACT106B

ACT1008A Orifice Tube Tool
- Services A/C systems
- 6 1/4" long

ACT119 Quick Connect Set
- Simplifies connecting to core valve service fittings
- Includes straight coupler and a 90° coupler that accept either of two adaptors

WARNING • Read safety precautions on pages W1 to W4

AIR CONDITIONING: SERVICE TOOLS

ACT1046C

ACT111B

ACT118B

TR109

ACT1290A

ACT81290

ACT499A

R404

RF818SC

TLE80A

ACT407

EECT4H

GOGGLE1

ACT1370

Service Tools

ACT1046C Flush Kit
- Pressure flush condensers, evaporators and refrigerant lines after A/C system is completely discharged
- Designed to work with any lightweight flushing material that can be mixed with pressurized air
- Includes flush gun, hose, canister and canister adaptor

ACT111B Compressor Oil Injector Adaptor
- Aluminum body holds up to 2 oz of oil
- Uses pressure differential of the high and low side of A/C system

ACT118B Spring Lock Coupler Set (Blue-Point®)
- Four-piece set aids in disconnecting refrigerant line couplings on many 1981 and later Ford® vehicle A/C systems
- Color coded: red, 3/8"; blue, 1/2"; black, 5/8"; and beige, 3/4"

TR109 Valve Core Tool
- Use to remove or replace valve cores on A/C systems (large bore)
- 6 3/4" long

ACT1290A Universal Valve Core Service Tool
- Removes and replaces standard size Schrader-style valve cores plus the larger size found in GM® vehicle systems

ACT81290 Universal Valve Core Service Tool
- Use on R12/R134a standard valve cores and JRA/EATON large bore R134a valve cores

ACT499A Spanner Wrench
- Adjustable three stud design for R-4 compressors in *GM* vehicles
- Applications on some *GM*, Warner®, Pitts® and Ogura® vehicle clutches

R404 Refrigeration Ratcheting Box Wrench
- Four popular square sizes: 3/16", 1/4", 5/16" and 3/8"
- Quick ratcheting action with reverse levers at both ends

RF818SC Refrigerant Ratcheting Box Wrench
- 9/16" six point for servicing compressor valve caps on one end
- 1/4" female square on other end for vehicles without Schrader valves

TLE80A 1/4" Drive TORX® 6-Point Socket
- Service size E8 *TORX* fasteners on many compressors

TLE60A 1/4" Drive *TORX* 6-Point Socket
- Service size E6 *TORX* fasteners on 1977 and later Eaton® and York® compressors

ACT407 Fin Straightener and Cleaner
- Multihead tool handles 8, 9, 10, 12, 14 and 15 fins per inch
- 4 1/4" long

EECT4H Circuit Tester
- Used to detect power and ground, also to find shorts and breaks
- Patented Instinct® handle for style and comfort
- Molded internal contact links with the LED assembly top dimple for low loss signal transfer
- Smart LED design has more brilliant light output and longer life than traditional bulb
- Finger turn screw on strain relief is easy on/off, has flexible wire protection at the critical bending point and is O-ring sealed
- Low power consumption and smart circuit design
- Copper clip is a superior quality component for maximum electrical signal transfer
- Superior flex wire glides past components and remains flexible, even in cold conditions
- Rubber Boot material stays flexible

TECHNICAL SUPPORT: 1-888-382-6522

GOGGLE1 Protective Goggles
- Durable molded frame with flexible elastomer seals comfortably for a custom fit around nose, cheeks and forehead
- Quick adjust headband clips permit fast and easy fitting
- Indirect ventilation system channels and directs airflow over the lens
- Uvex® 4C+™ lens coating protects against fogging, scratches and ultraviolet rays
- ANSI® Z87.1-1989

ACT1370 Disconnect Set *(Blue-Point)*
- Convenient plastic holder included
- Useful on air conditioning spring couplings as well as push-lock connectors on radiator and transmission lines
- Includes six tools for disconnecting spring couplings on *Ford*, *GM* and Chrysler® air conditioning lines
- Works on fuel lines and can be used as push-lock connectors on radiator and transmission lines
- Included sizes are 5/16", 3/8", 1/2", 5/8", 3/4" and 7/8"

TURN YOUR COOLING BUSINESS INTO COLD HARD CASH.

When you keep every vehicle running cool – every time – that means more business comes your way. Snap-on helps you with the latest technology in cooling system products and complete cooling system coverage. From cooling system pressure testers, to radiator cap adapters, to cooling system fillers, Snap-on makes your job a breeze.

COOLING: RADIATOR TOOLS

SVTSRAD262A

SVTSRAD262U

RADKITPLUSA

RADKITPLUSJR

YA4505

Vacuum Cooling System Filler

SVTSRAD262A Vacuum Cooling System Filler
- Eliminates cooling system air locks that cause overheating
- Ideal for vehicle specific shops or municipal garages
- Expands the versatility of SVTS262C cooling system tester
- Adaptors available separately for virtually all import and US vehicles
- Gauge includes internal shock resistance feature and protective rubber boot to assure an accurate reading
- Includes main body assembly, Venturi® and hose assembly, suction hose assembly, instruction manual with complete adaptor list

SVTSRAD262U Universal Cooling System Filler
- Universal version does not require cooling system adaptors
- Includes two universal style cones to cover most applications

RADKITPLUSA Cooling System Vacuum/Filler
- Easily eliminate cooling system air locks that can cause overheating
- Vacuum test checks for system leaks prior to filling
- Gauge protector helps prevent damage to gauge housing
- Push-button vacuum valve for easy operation
- Fills system quickly by siphoning directly from the mix container
- Requires 90 PSI (4.2CFM) air supply
- Includes *Venturi* assembly gauge and gauge protector, refill hose assembly, adaptors for most applications, universal fit cone adaptor, hose assembly and instruction manual with complete adaptor list in storage case

RADKIT5 Radiator Neck Adaptor Kit
- Radiator neck fitting adaptor kit for RADKITPLUSA
- Includes four adaptors in sizes .54", 1.36", 1.57" and 1.86"

RADKITPLUSJR Vacuum Cooling System Refiller
- Reduces system filling time, eliminates airlocks and checks for system leaks
- Compact size allows access in restricted underhood areas
- Cone adaptor ensures unit will work on most US and import passenger vehicles and light trucks
- Push-button control valve eliminates the need to interchange hoses
- Shop air (90 PSI) quickly draws a powerful vacuum
- Eliminates system bleeding and purging

YA4505 Universal Radiator Adaptor (Blue-Point®)
- 95% application coverage on cars and light trucks
- Replaces as many as 25 other costly radiator adaptors
- Compatible with radiator necks or reservoir tanks
- Can be used with RADKITPLUSA or RADPLUSA cooling system fillers, YA4000B vacuum and pressure pump and SVTS262A, SVTS262B and SVTS262C cooling system testers

YA2090

RCR1

YA9190

2009FPI

YA7747

CG25

GA424A

LDTSP4

Radiator and Freeze Plug Tools

YA2090 Radiator Cap Wrench *(Blue-Point)*
- Grips and removes radiator caps with or without wings
- 7 1/2" in length

RCR1 Radiator Coolant Reservoir Cap Tool
- 3/8" drive tool is used to remove stubborn radiator coolant reservoir caps on BMW® vehicle engines
- Will not mar the reservoir cap like pliers can
- Made of nylon
- 2006–present *BMW* vehicles

YA9190 Universal Radiator Drain Plug Socket *(Blue-Point)*
- Double slotted end of this 3/8" drive socket will fit most radiator drain plugs that have thumb wings
- Will fit Acura®, Honda®, Toyota®, Lexus® and other import vehicles

2009FPI Freeze Plug Installer Kit
- 18 1/2" long installing tool with ball type swivel for easy positioning
- Seven installer heads in 20 mm, 25 mm, 30 mm, 35 mm, 40 mm, 45 mm and 50 mm sizes

YA7747 Pneumatic Adaptor *(Blue-Point)*
- Speeds freeze plug installation
- Use with 2009FPI Installer Kit
- 401" Parker-style shank enables use with air hammers

CG25 Freeze Plug Puller
- Freeze plugs up to 2" in diameter
- 1/4" thick yoke receives 2 7/8" long self-tap screw
- Drill 17/64" hole first

GA424A Belt Tension Gauge
- Range is 30–180 lb (130–800 N•m)
- Squeeze handle, place gauge on drive belt, release handle and read

LDTSP4 Quick Disconnect Fittings Set
- Includes sizes 3/8", 1/2", 5/8"–30% and 5/8"–39%
- **Applications:** 1996 and newer GM® vehicles, many 2004 and newer Daimler Chrysler® vehicles, some 2005 and newer Mercedes® vehicles, V-Rod®, Freightliner®, Peterbilt®, Volvo® and White®. Handy spring action keeps the tool on the line for ease of use. Teeth fit perfectly into tight tolerance of Jiffy-tite® connectors. When rotated, allows the line to be pulled without damage to the connector or retaining clip. Fits the most popular *Jiffy-tite* fittings found on oil cooler lines used on transmissions and radiators and on other applications

AF102

YAUVCOOL

GDCT16

Antifreeze and Coolant Testers

AF102 Antifreeze Hydrometer (Blue-Point®)

- Degree of protection indicated by direct reading; no temperature compensating scales required
- Range of -60 °F–32 °F
- Range of -51 °C–0 °C
- Tests hot and cold solutions

Leak Testers

GDCT16 Combustion Leak Tester *(Blue-Point)*

- Provides an easy and quick way to diagnose engine overheating problems
- Checks for leaks between the combustion chamber and the cooling system
- Test head and gasket for combustion leaks before removing the radiator
- Double chamber in testing unit provides a high level of accuracy
- For use on water-cooled gas and diesel engines
- Kit includes complete test chamber, 16 oz bottle of testing fluid and instructions

GDCT161 Leak Detector Fluid *(Blue-Point)*

- 16 oz bottle of leak testing fluid for the GDCT16 combustion leak tester

YAUVCOOL Leak Detector Fluid *(Blue-Point)*

- Six 1 oz bottles of dye for coolant systems for use with ACTUVLITEA

SVTS272

SVTS263A

SVTS2000

Cooling System Testers

SVTS272 Cooling System Tester

- New pump will achieve higher pressures needed for new vehicles
- Design reduces physical effort by nearly one-half
- Includes the four most commonly required adaptors
- Easy identification: adaptors look like the caps from the systems they test
- Safe pressure relief system protects technician from exposure to coolant
- Pump can produce up to 30 PSI to pressure test cooling system of cars and light trucks and even heavy duty trucks with included adaptors
- Set can test over 90% of the vehicles in the field
- Set can pressure test most US or Asian made vehicles
- Add additional adaptors required to test European made vehicles

SVTS263A Cooling System Pressure Tester, Air Powered

- Uses pressure-regulated shop air to pressure test cooling systems for leaks
- Sensitive pressure regulation allows safe testing of small systems
- Sufficient capacity to fill large systems in seconds
- Stainless-steel rugged and chrome plated components ensure maximum durability and a lasting finish
- Compatible with most commonly used cooling system adaptors
- Pressure gauge has internal shock absorber protection and rubber boot
- Safety spring release cap assembly limits pressure to no more than 32 PSI
- Convenient swivel hook allows unit to be hung from under vehicle hood
- Includes three of the most common cooling system adaptors: TAB10036, SVT262-28A and TA38C

SVTS2000 Coolant Barrier Pressure Tester

- Change cooling-system components without draining system
- Uses shop air to create light vacuum that prevents coolant from draining as a component is changed
- Large hose and higher air flow allows even overfilled systems to be worked on without draining
- Clear intake hose allows technician to see when coolant is being pulled into the tool
- Switch from coolant retention to pressure testing just by turning a valve handle

⚠WARNING • Read safety precautions on pages W1 to W4

COOLING: RADIATOR TOOLS

SVT262-28A

SVT262-29

TA16B

TA23A

TA18B

TA26A

TA27

TA31A

TA30A

TA32A

TA33A

TA34A

TA36GM

TA37

TA38C

TA39A

TA41

TA40

TA44

TA45

TA46

TA47

TA48

TA49

TA50

TA52

TA53

TA54

TA56

TA57

TA58

TA59

TA445

TA446

TA4503

TA245A

TA246A

TA345A

TA346A

TA4505

TA4504

A4503A

Cooling System Tester Accessories

Radiator adaptors and cap adaptors listed below can be used with the SVTS262 Series and SVTS263 Series cooling system testers. See SVTS262C cooling system tester instruction manual for complete listing of specific model year applications.

Radiator Adaptor	Cap Adaptor	Vehicle Applications
SVT262-28A	SVT262-29	Acura®, Chevrolet®, Chrysler®/Dodge®/Eagle®/ Plymouth®, Ford®/Lincoln®/Mercury®, Geo®, Honda®, Hyundai®, Infiniti®, Isuzu®, Lexus®, Mazda®, Mitsubishi®, Nissan®, Subaru®, Suzuki® and Toyota®
TA16B	TA23A	VW® and Audi®
TA18B	TA26A	Volvo®, Saab®, Jeep®, Sterling® and Renault®
TA27	–	*Volvo* large trucks with 63 mm x 3 mm threaded filler neck
TA31A	TA30A	*VW*
TA32A	TA33A	Buick®, Cadillac®, *Chevrolet, Ford*, International®, Mercedes®, Oldsmobile®, Pontiac® and Saturn®
TA34A	TA246A	*Ford*, Jaguar®, *Pontiac*, Porsche®, Range Rover® and Saab®. Use with TA246A cap adaptor
TA36GM	TA37	*Cadillac, Chevrolet, Geo*, GMC®, *Pontiac, Oldsmobile* and *Saturn*. Use with TA37 cap adaptor
TA38C	TA39A	*Acura, Chevrolet, Chrysler, Geo, Honda, Isuzu, Lexus, Mazda, Mitsubishi, Suzuki* and *Toyota*. Use with TA39A cap adaptor
TA41	TA40	*Audi* and *VW*
TA44	TA45	*Mercedes*
TA46	TA47	*Ford, Jaguar* and *Mazda*. Use with TA47 cap adaptor
TA48	TA49	*Toyota*
TA50	–	*Volvo* large trucks with 48 mm x 3 mm male thread on filler neck
TA52	TA53	*Mazda* 3 (2004 and later) and *Volvo* S40/V50 (2004 and later)
TA54	–	Freightliner® trucks with 60 mm x 3 mm male thread on filler neck
TA56	TA57	Cobalt SS (2005 and later) and *Saturn* Ion Redline (2004 and later) with Supercharger cooling systems
TA58	TA59	2007 *Dodge* Sprinter® Van with 42 mm x 2.5 mm thread on filler neck
TA445	TA446	BMW® 3-series (2006 and later) and 5- and 6-series (2005 and later)
TA4503	–	1980s GM® X and J body cars
TA245A	TA246A	*BMW* and *Mercury*. Use with TA246A cap adaptor
TA345A	TA346A	*BMW* and *Range Rover*
TA450A	Truck Adaptor Set	For trucks with "B" size (2 $^{11}/_{16}$" OD) filler neck adaptors. Includes A450-1A rubber plug
TA4505	TA4504	For trucks with "B" size (2 $^{11}/_{16}$" OD) filler neck adaptors
A450-1A	Rubber Plug	Use with TA450A truck adaptor kit or as a replacement plug for A4503A *GM* adaptor kit
A450-2A	Rubber Gasket	Use with TA450A truck adaptor kit or as a replacement gasket for A4503A *GM* adaptor kit
A4503A	GM Adaptor Set	Tests system pressure on closed cooling systems on *GM* 2.5L "X" body cars and 1.8L "J" body cars

TAB10022

TAB10025

TAB10031

TAB10034

TAB10036

TAB10041

TAB10044

TAB10046

Cooling System Adaptor Set (Blue-Point®)

Radiator Adaptor	Vehicle Applications
TAB10022	Pre-1990, VW®, Audi® and Porsche®: Boxster®, Cayman, 911
TAB10025	Volvo®, Saab® and Jeep®
TAB10031	*VW* 1990–1998
TAB10034	Ford®, Jaguar®, *Saab* and Saturn®
TAB10036	GM®, *Ford, Jaguar,* Mazda® and Nissan®
TAB10041	*VW, Audi* and *Porsche*
TAB10044	Mercedes-Benz® and Chrysler®
TAB10046	*Ford, Jaguar* and *Mazda*
TAB10048	Some Lexus®, Scion®, Toyota® (especially hybrids)
TAB10052	*Mazda* 3, most *Volvos*, Range Rover® and 2012 *Ford* Fiesta
TAB10056	Chevrolet® Cobalt and *Saturn* Ion
TAB10245	Pre-1988 BMW® and Merkur
TAB10345	Most *BMW* (1998–2006) and *Range Rover*
TAB10445	*BMW* 2005 and later

TAB10048

TAB10052

TAB10056

TAB10245

TAB10345

TAB10445

SVTAB1400 Cooling System Adaptor Set *(Blue-Point)*
- TAB series adaptors feature a composite metal/plastic construction for a lower cost option
- Includes (14) radiator composite metal/plastic radiator adaptors
- Storage case has extra storage compartments to accommodate the pump and gauge assembly and original three adaptors from the SVTS262C set
- Includes all TAB series adaptors (except TAB10036) plus TA4503 adaptor
- See instruction manual for a complete listing of all applications

PBSVTA1417 Storage Case
- Storage case for SVTAB1400
- Removable cover for display

SVTAB1400

Cooling System Tester (Bladder Sealing System) *(Blue-Point)*

Stock No.	Description	Application
SVT27515	Pressure Pump	—
SVT2752	Gauge, 0–30 PSI (0–207 kPa)	—
SVT2753	Spare Bladder	—
SVT27516	Valve Seal Kit	—
SVT27517	Head Assembly	—
SVT2756	Neck Extension (Blue)	*VW* header tanks
SVT2757	Neck Extension (Red)	Japanese micro vehicles
SVT2758	Neck Extension (Black)	*Audi/VW* header tanks
SVT2759	Cap Adaptor (Blue)	Standard bayonet, *Ford* header tank, *GM* N-body
SVT27510	Cap Adaptor (Yellow)	*Jeep, Saab, Audi/VW* external thread header tanks
SVT27511	Cap Adaptor (Green)	Small Japanese deep, *Audi/VW* internal thread header tanks
SVT27512	Cap Adaptor (Red)	Small Japanese shallow, late model *Audi/VW* external thread header tanks
SVT27513	Cap Adaptor (Orange)	Late model *BMW*, Land Rover® and *Range Rover*
SVT27514	Cap Adaptor (Gray)	Late model *Mercedes-Benz* with thread type

SVT275

SVT275 Cooling System Tester
- Inflatable bladder-sealing system enables use with most passenger and light commercial vehicles
- Tests header tanks and radiator systems as well as thread type and bayonet style caps
- Locate leaks from head gaskets, radiator and heater cores, Welch plugs and housings, water pumps and hoses
- Test cap relief pressure and seal condition
- Suitable for marine applications
- Fluid drain tube allows coolant to be returned to reservoir or safely collected for recycling
- Cycle tested to over 1,500 inflations
- Set includes SVT2751–SVT27514 (14pc) plus air supply hose and instruction manual in storage case

COOLING: TESTERS

SVTA6100

Truck Cooling System Adaptor Set

SVTA6100 Large Truck Cooling System Adaptor Set
- Designed for use with the SVTS262C but compatible with virtually any cooling system tester
- Ideal for servicing large trucks (Volvo®, Kenworth®, Freightliner® and more)
- Pressure test the eight different filler necks found on modern large trucks when combined with the pump and TAB10036 adaptor from the SVTS262B, SVTS262C or SVTS263A sets
- Can also be combined with the SVTS263A air powered cooling system pressure tester to provide virtually 100% truck coverage
- Includes TA27, TA50, TA54, TA32A, TA4505 and TA58 adaptors plus instruction manual in PBSVTA600 storage case

SERVICE TOOLS

YA1000A

PWC60

HCR1

Hose Cutters and Removers (Blue-Point®)

YA1000A Multi Cutter
- Ideal for cutting heater hoses, fuel line hoses, copper wiring, PVC pipes, wiper hoses and air brake hoses, plus any resilient or semi-resilient material with a 0–1 1/8" diameter
- Comfort contoured handles with plastic grips
- Wire loop for safe storage: 9 5/8" long

PWC60 Compound Leverage Hose Cutter
- 8 1/2" compound action multiplies normal hand pressure to easily slice through rubber and plastic hose up to 1 1/8" in diameter
- Includes stainless-steel cutter blades and internal components

HCR1 Heater Hose Coupler Removal Tool
- Removes broken heater hose couplers on GM® vehicles
- Can be used with an impact wrench

YA9325-1

YA9325-2

YA9521

YA9526

YA9980

YA6160

YA6210

Fan Clutch Wrenches/Pulley Holders *(Blue-Point)*

YA9325-1 Metric Flat Wrench
36 mm wrench size, 343 mm long

YA9325-2 Crowfoot Wrench
58 mm wrench size, 58.7 mm long

YA9521 Flat Wrench
36/48 mm wrench size, 356 mm long

YA9526 Fan Clutch Wrench for Ford® Vehicles
- 40 mm open end wrench
- Use with YA9325-2 or YA9522
- Applications include 4.9 L Econoline® vans (1992–1996) and 4.9 L F-Series pickups (1993–1996)

YA9980 Water Pump Fan Clutch Pulley Holder
- Use on vehicles with pressed on pulleys
- Use on *GM* (6.0 L V8 1999 and later) and Chrysler® (3.9 L V6, 4.7 L V8, 5.2 L V8, 5.9 L V8, 8.0 L V10 1998 and later)
- Cannot be used on *Chrysler* 4.7 L V8 using factory replacement water pumps

YA6160 Universal Fan Clutch Pulley Holder
- Removes and replaces the fan clutch on vehicles using "bolt on" water pump pulleys
- Reverse pulley holder for assembly operations
- Use with YA9521 36/48 mm wrench or YA9526 40 mm wrench for many *Chrysler*, *Ford*, Lincoln®, Mercury® and *GM* applications

YA6210 Fan Clutch Wrench for BMW®/Audi®/VW® Vehicles
- 32 mm fan clutch wrench is used with YA6160 fan clutch pulley holding tool to service *Audi* vehicles (1996 and later), *VW* Passat® 3.0 L V6 (1998 and later) plus *BMW* 3, 5, 6, 7, 8, X and Z series vehicles
- YA6160 works on all models listed except 4.0 L and 4.4 L V8 engines
- Made from heat-treated steel
- Overall length of 17" (431.8 mm)

YA6180

FCT706

YA6120

Fan Clutch Wrenches/Pulley Holders (Blue-Point®)

YA6180 Fan Clutch Wrench
- Use on GM® and Ford® diesel and gas engines with a 48 mm fan clutch nut
- Provides the extra leverage needed to remove the fan clutch nut
- Overall length of 20 1/8"
- Head width of 4 1/8"
- Head thickness of 3/8"

FCT706 Fan Clutch Wrench
- Fan clutch wrench for heavy duty truck engines
- Hole pattern on tool aligns with fasteners on fan hub
- Use with open end wrench to remove fan clutch. 24 1/2" length for maximum leverage

Applications: International® (VT365, T444E, DT466, DT350 and HT530), *Ford* Power Stroke® (7.6 L and 6.0 L), Detroit Diesel® (Series 40) and John Deere® engines.

YA6120 Fan Clutch Wrench Set
***Ford*/Lincoln®/Mercury® Applications:** E-Series trucks 4.9 L (1984–1991), F-Series trucks 4.9 L (1984–1992), Bronco® II and Ranger® 2.8 L (1984–1985), *Ranger* 2.9 L (1986–1992), Aerostar® 3.0 L (1986–1988), *Aerostar* and *Ranger* 4.0 L OHV (1990 and later), Explorer® 4.0 L OHV (1991 and later), Mazda® Navajo 4.0 L OHV (1991–1994), *Mazda* B4000 4.0 L OHV (1995 and later), *Explorer* 4.0 L V6 SOHC (1997 and later) and Mountaineer® 4.0 L V6 SOHC (1998 and later). ***GM* Applications:** Astro and Safari® vans 4.3 L, Blazer, Jimmy and Bravada® SUV 4.3 L, S10, Sonoma and Isuzu® Hombre pickups with 2.2 L 4 cylinder and 4.3 L V6, C1500, C2500, C3500, K1500, C1500/C2500/C3500/K1500 Sierra pickups, G1500/G2500 Chevrolet® Express, G1500/G2500 Savana vans 4.3 L V6, 5.0 L V8 and 5.7 L V8; and Suburban®, Tahoe®, Yukon®, Escalade®, Denali® and Envoy® 5.7 L V8.

HCP48CF

HCP9

HCP10

HCP20

Hose Clamp Pliers

HCP48CF Mobea Hose Clamp Pliers
- Three position joint gives wider jaw spread
- For 3/4"–2" diameter clamps
- Radial jaw serrations allows user to grip and adjust hose

HCP9 Corbin Heater Hose Clamp Pliers *(Blue-Point)*
- 9" length
- Removes or replaces all spring wire hose clamps
- Deep slotted jaws swivel 180° and lock in three different positions

HCP10 Mobea Heater Hose Clamp Pliers *(Blue-Point)*
- 9" length
- Same as HCP9, except for new style hose clamps found on *GM*, *Ford*, VW®, BMW®, Toyota®, Volvo® and Audi® cars

HCP10RK Service Kit *(Blue-Point)*
- Includes one pair of replacement tips plus a replacement spring for HCP10

HCP20 Mobea Heater Hose Clamp Pliers *(Blue-Point)*
- For heater and radiator hoses found on 1988–1990 *GM*, *Ford*, Chrysler® and most imports
- Jaws pivot to almost any angle

YA497A

PHP1

PHP3

HCP313

Hose Clamp Pliers *(Blue-Point)*

YA497A Hose Removal Pliers
- Simplify removal of 5/32"–1/2" vacuum and fuel hoses
- 8" in overall length

PHP1 Hose Clamp Pliers
- Clamp off hoses up to 1 1/4" in diameter
- Swivel jaws for parallel clamping action
- 9 1/4" in overall length

PHP2 Hose Clamp Pliers
- Clamp off hoses up from 1 1/4"–2 3/4" in diameter
- Swivel jaws for parallel clamping action
- 4 3/8" jaw length
- 14" long

PHP3 Hose Clamp Pliers
- Clamp off hoses up to 3/4" in diameter
- Swivel jaws for parallel clamping action
- 1 1/4" jaw length
- 5 1/2" long
- Black industrial finish

HCP313 Adjustable Hose Clamp Pliers Set
- Enables technician to access, release, remove and install constant tension hose clamps
- Newly designed superior ratchet mechanism for ease of operation
- 360° rotating deep slotted tips firmly grip clamps at any angle
- Ergonomically designed with solid rivet construction for long life and durability
- Extended reach for easy access to engine compartment
- Soft-touch grips are double dipped for increased comfort and control
- Heat-treated steel for strength and corrosion resistance
- Electroplated arms and tips for durability
- Set includes HCP13 straight, HCP1345 45° and HCP1390 90° angled heads for optimum positioning

HCP13 Straight Hose Clamp Pliers

HCP1345 45° Hose Clamp Pliers

HCP1390 90° Hose Clamp Pliers

⚠WARNING
- Do not use "cheater bars" on handles
- Plastic coated handle does not protect against electric shock
- Read safety precautions on pages W1 to W4

COOLING: REMOTE HOSE CLAMP PLIERS

SHCP1A

SHCP2

SHCP1A Remote Hose Clamp Pliers
- Used to remove standard, space-saver and pre-opened hose clamps up to 2"
- Unique jaw design works on all three clamp types
- Heavy Duty 5/64" cable for extra long life
- Bi-mold grips with cable snap feature
- Five-stop ratchet lock with slide guide
- Easy replacement cable fixture

SHCP2 Remote Hose Clamp Pliers
- Infinite Locking Positions – Friction locking mechanism allows user to hold the clamp open at any position from closed to fully opened
- Ergonomic Grip – Low constant operating force applied to the wide comfortable pistol grip results in reduced effort and hand fatigue during operation
- Increased Accessibility – Longer cable is flexible over its entire length, allowing it to reach in and around obstacles that "slide style" remote hose clamp pliers cannot
- Longer Clamp End – Longer flexible engaging end works on larger clamps in any position on the hose
- Lifetime warranty on handle–Repair kit available for cable and jaws

SERVICE TOOLS

SGA173BR

SGA174BG

SGA175BO

SGA1710BR

SGA1711BG

SGA1712BO

SGA176BR

SGA177BR

SGCP1BR

SGRHT2BO

SGRHT6BR

SGRHTLB3BR

Soft Grip Handle Colors

Red	Orange	Green
R	O	G

ADD SUFFIX TO STOCK NUMBER FOR SPECIAL COLORS

Soft Grip Hose Picks

- Ideal for removing and replacing hoses and clamps
- Unique hose blade design for getting around the most difficult obstacles
- Soft, solvent-resistant handle material provides a sure, comfortable grip

Red	Green	Orange	Finish	Blade Length, inches (mm)	Length, inches (mm)	SGRHT2BR	SGRHT2BG	SGRHT2BO	SGRHT6BR	SGRHT6BG	SGRHT6BO	SGRHTLB3BR	
SGA173BR	SGA173BG	SGA173BO	Chrome	5.43 (137.9)	10.33 (262.4)	•	•	•	•	•	•		
SGA174BR	SGA174BG	SGA174BO	Chrome	4.94 (125.5)	9.84 (249.9)				•	•	•		
SGA175BR	SGA175BG	SGA175BO	Chrome	4.61 (117.1)	9.51 (241.6)				•	•	•		
SGA1710BR	SGA1710BG	SGA1710BO	Chrome	11.66 (296.1)	16.56 (420.6)	•	•	•	•	•	•		
SGA1711BR	SGA1711BG	SGA1711BO	Chrome	10.89 (276.6)	15.79 (401.1)				•	•	•		
SGA1712BR	SGA1712BG	SGA1712BO	Chrome	11.00 (279.6)	15.91 (404.1)				•	•	•		
SGA176BR	–	–	Industrial Finish	5.62 (142.9)	10.50 (266.7)							•	
SGA177BR	–	–	Industrial Finish	5.19 (131.8)	10.09 (256.2)							•	
SGCP1BR	SGCP1BG	SGCP1BO	Industrial Finish	5.15 (130.8)	10.00 (254)							•	

SGA173BR Radiator Hose Pick
- Use for easy-access applications

SGA174BR Radiator Hose Pick
- Perfect for tight-access firewall applications

SGA175BR Radiator Hose Pick
- Ideal for getting behind hoses and pulling

SGA1710BR Radiator Hose Pick
- Longest pick for extra reach

SGA1711BR Radiator Hose Pick
- Length and angle are designed for tight-access and long-reach firewall applications

SGA1712BR Radiator Hose Pick
- Long pick easily maneuvers around obstacles

SGA176BR Radiator Hose Pick
- 45° pick for restricted-access applications

SGA177BR Radiator Hose Pick
- 90° pick for restricted-access applications

SGCP1BR Cotter Pin Puller
- Make short work of pulling even large pins
- Heat-treated shank provides maximum strength
- Soft grip handle: 8 1/2" long

COMPLICATED JOBS. SIMPLE SOLUTIONS.

Simply put, Snap-on innovation takes the complexity out of complex jobs. Our entire selection of shop equipment streamlines the process to make your job easier.

THE BASICS FOR THE SHOP.

Start here for the building blocks of a successful business. Air compressors, abrasive blast systems, vices, workbenches, fluid maintenance tools, paint equipment and more.

THE BASICS FOR THE TECHNICIAN.

For all the day-to-day needs: lighting, lubrication, creepers, measurement and body repair tools, just to name a few.

LIGHTING: FLASHLIGHTS

High-Output LED Flashlights

- Precision-machined aircraft aluminum
- Crush resistant 2,000+ lb
- O-ring provides ultra-tight seal
- Shock-proof and water-resistant
- Three-way tactical switch (momentary on/constant on/lockout mode)

	Stock No.	Battery Type	Number of Batteries	Effective Range (up to)	Lumens	Overall Length, inches	Run Time (hours)
	ECF900	AAA	1	190 ft (58 Meters)	53 (50,000 Hr LED)	2 7/8"	Approx. 1 hour 20 minutes on high. Approx. 26.0 hours on low
	ECF900R	AAA	1	190 ft (58 Meters)	53	2 7/8"	Approx. 1 hour 20 minutes on high. Approx. 26.0 hours on low
	ECF925CR	AA Alkaline	1	266 ft (81 Meters)	55	3 7/8"	Approx. 1 hour 45 minutes on high. Approx. 40 hours on low
	ECF950BR	123A Lithium Alkaline	2	131 ft (40 Meters)	31	—	Approx. 17 hours 30 minutes on high. Approx. 85 hours on low
	ECF965CR	AA Alkaline	2	443 ft (135 Meters)	150	5 7/8"	Approx. 1 hour 10 minutes on high. Approx. 60 hours on low
	ECF975BR	123A Lithium Alkaline	2	636 ft (194 Meters)	200	6"	Approx. 3 hours on high. Approx. 40 hours on low
	ECF985	3.7 volt, 2200mAh Lithium Ion Rechargeable	1	495 ft (151 Meters)	227	6 1/4"	Approx. 2 Hours 25 minutes on high. Approx. 41 hours on low
	ECF985R	3.7 volt, 2200mAh Lithium Ion Rechargeable	1	495 ft (151 Meters)	227	6 1/4"	Approx. 2 hours 25 minutes on high. Approx. 41 hours on low
	ECF990R	3.7 volt 2200mAh Lithium Ion Rechargeable	1	728 ft (222 Meters)	540	7 7/8"	Approx. 1 hour 50 minutes on high. Approx. 7 hours on medium. Approx. 50 hours on low

Penlight LED Flashlights

	Stock No.	Battery Type	Number of Batteries	Lumens	Overall Length, inches	Run Time (hours)
	ECFPEN5B	AAA	2	144	4 3/4	Approx. 1 hour on high. Approx. 34 hours on low
	ECFPEN5BK	AAA	2	144	4 3/4	Approx. 1 hour on high. Approx. 34 hours on low
	ECFPEN5R	AAA	2	144	4 3/4	Approx. 1 hour on high. Approx. 34 hours on low

ECFH3

ECFH1 AA/AAA Flashlight Holder
- Magnetic base offers secure hold of AA/AAA flashlights
- Ball joint permits 360° rotation and pivots 70°
- Enables light beam of flashlight to be positioned as needed

ECFH2 D-Cell Flashlight Holder
- Magnetic base offers secure hold of D cell flashlights
- Ball joint permits 360° rotation and pivots 70°
- Enables light beam of flashlight to be positioned as needed

ECFH3 C-Cell Flashlight Holder
- Magnetic base offers secure hold of C cell flashlights with width of 3/4"–1 1/8"
- Ball joint permits 360° rotation and pivots 70°
- Enables light beam of flashlight to be positioned as needed

Flashlight (Blue-Point®)

ECFPEN7HOA

ECFPEN7HOA Rechargeable Penlight
- Bright, broad illumination covers wide area
- Seven high-output front-facing LEDs
- Spot lens on bottom of light for inspection

Applications
- Compact size fits in shirt pocket

ECFB200BL

ECFB200BL Penlight, Blue

ECFB200S Penlight, Silver
- High intensity 3 W, 100 lumen penlight
- 6.25" length, 1/2" diameter
- Includes pocket clip and protective rubber tip
- Includes three AAA batteries

ECFB200S

ECFCLPSIDE Large Sideways Clip Case

ECFCLPSIDE
- Horizontally designed, *Snap-on* branded smart phone case for large-screen smart phones (*iPhone*, *Samsung Galaxy* Series and similar)
- Made of durable ballistic nylon to protect from impacts
- Perfect for rugged work or play environments of nearly every kind
- Rugged flex clip ensures confident attachment to waistbands, belts or straps up to 2 3/16"
- Internal pocket holds credit cards, ID, currency and more for convenient access
- Features secure hook and loop lid closure
- Dimensions: 5.5" x 3" x 1.7"

ECFCLPSIDEXL Extra Large Sideways Clip Case
- Same features as ECFCLPSIDE
- Dimensions: 6.4" x 3.5" x 1"

Small Storage Cases

ECFLASHOLDER Flashlight Stretch Holster
- Rugged Snap-on® branded holster for AAA, AA, L123, C & D cell flashlights – fits from 5/8"–1 1/2" diameter barrels
- Two durable elastic side panels expand to keep flashlights from AAA to D secure
- Also doubles as a useful hands-free device – angle up to see, read, work with both hands
- Open-ended design allows easy access to the flashlight's tail cap
- Durable clip rotates 360° and locks in eight different positions
- Clip fits belts up to 2 3/8" wide
- External case dimensions: 5.85" x 2.0" x 1.6"

ECFLASHOLDER

ECFCLPCARGO Tall Cargo Clip Case
- *Snap-on* branded cell phone case for wider phones absorbs shocks and shields from the elements
- Universally sized to fit large-screen smart phones (iPhone®, Samsung® Galaxy® Series and similar) with bigger displays that need extra protection
- Made of extremely durable ballistic polypropylene
- Fully rotates for access at any angle, and even locks in eight different positions
- Two pockets on the case – one inside and one in the back – hold identification, cash, credit cards, wireless headset or headphones
- Perfect for those who work and play in rugged environments, and want extreme protection for their valuable smart phones
- Features super strong rotating flex clip that is designed to fit waistbands, belts or straps up to 2 3/8" (6 cm)
- External case dimensions: 5.8" x 3.1" x 2.3"

ECFCLPCARGO

Rotating Flashlights *(Blue-Point)*

ECFLED24 Rotating Magnetic LED Work Light
- 24 high-output LEDs provide bright illumination
- Sturdy blue aluminum housing for durability
- Rotating head allows directional positioning
- Powerful magnetic base for secure mounting
- Includes three AAA batteries

ECFLED24

ECFLED48 48 LED Rotating Magnetic Work Light
- 48 high-output LEDs produce more than 2,000 lux at 24"
- Strong magnet mounts securely on any ferrous surface
- Pivoting ball joint base permits positioning at any angle
- Includes three AA alkaline batteries
- Two times as bright as the original 24 LED version

ECFLED48

ECFLEX3 3 SMD LED Flexible Base Shop Light
- Three super-efficient SMD LEDs produce 550 Lux @ 0.5 meters, 110 lumens light output
- Three AAA alkaline batteries provides three hours' run time
- 9.5" heavy duty flex arm allows for multiple positions
- Light base features six strong Neodymium-Iron-Boron Magnets
- Bottom hook and hang hole for positional flexibility
- One-year warranty

ECFLEX3

⚠WARNING
- Do not remove or bypass the grounding prong on any electrical plug
- Read safety precautions on pages W1 to W4

LIGHTING: RECHARGEABLE SHOP LIGHTS

ECFLED84

Rechargeable Shop Lights

ECFLED84 Rechargeable Shop Light
- 84 high-output SMD LEDs produce approx. 550 lumens
- Bright spotlight on top
- Two brightness levels – 100% & 50%
- 4,400 mAh lithium ion rechargeable battery
- Includes 1A USB charger and cable

ECFBARLED Rechargeable Shop Light
- 500 lumens light output for broad illumination
- 3.7V, 4,000 mAh Li-ion battery, 5 hour charger, 3 1/2 hour runtime
- Dual position switch-100% & 50% power levels
- Top and Bottom ratcheting hooks for versatile positioning
- All key parts are user-replaceable reducing downtime on any necessary repairs
- Rechargeable features saves money on batteries

ECFSP200A High-Output Bar LED Shop Light
- 120° wide viewing angle
- High-output LED BAR
- Includes 110V charger cord and charge base
- Battery capacity 1,300 mAh
- LED life time approximately 15 years
- Continuous operation for up to three hours
- UL®/CSA® listed

ECFBARLED

ECFSP200A

Cordless LED Shop Light with Spot

- 68 high-output LEDs with diffusion tube provide high light output to work surfaces
- USB charger cord and charger for multiple options recharging
- 350 lumen light output, 180° light angle coverage
- Bright spot light 60 lumens output
- Multi-position folding top hook for increased usability
- Cordless, rechargeable compact shop light – take it anywhere
- Rechargeable Lithium-Ion 3,300 mAh battery offers three hours' continuous light
- IP56 rating for water and dust resistance

ECFLED68SPB Cordless LED Shop Light w/ Spot, Blue
ECFLED68SPBK Cordless LED Shop Light w/ Spot, Black
ECFLED68SPG Cordless LED Shop Light w/ Spot, Green
ECFLED68SPO Cordless LED Shop Light w/ Spot, Orange
ECFLED68SPR Cordless LED Shop Light w/ Spot, Red

ECFLED68SPBK

High-Output Rechargeable Shop Lights

ECFBP6 High-Output Rechargeable Shop Light, Blue
- Six super-efficient SMD LEDs produce 500 Lux @ 0.5 meters, 350 lumens light output
- 2,000 mAh Lithium-Ion battery provides three hours' run time, requires four hours' charge time
- USB charger and cable included for easy charging anywhere
- Sealed against moisture and dust – IP65 rated
- Two brightness settings – 100% and 50% for longer run time
- 180° hinge for mounting flexibility
- Strong magnet in base for mounting to ferrous surfaces
- Retractable hook and stand for multiple positioning options
- Recessed front lens reduces likelihood of surface scratches

ECFBP6G High-Output Rechargeable Shop Light, Green
ECFBP6O High-Output Rechargeable Shop Light, Orange

ECFBP6

Rechargeable Shop Light (Blue-Point®)

ECFLED6HOA High-Output Rechargeable Shop Light
- Six ultra-high-output SMD (surface mount diode) LEDs
- Wide-oval light pattern for broad area coverage
- Bright spot light on top for inspection applications
- Dual position switch – toggle between front light and spot light
- Dual magnets – on back of light and bottom base
- Ratcheting hinge for multi-angle use
- Includes 110V AC charger and 12V in car charger
- Serviced by Snap-on® repair centers

ECFLED6HOA

Rechargeable Utility Lights

- Ten SMD front-facing LEDs provide high light output to work surfaces
- USB charger cord and charger for multiple options recharging
- 90° light angle with high light output – 170 lumens
- Bright spot light – 50 lumens output
- Two brightness level design
- Slim design for use in tight places
- CSA®/UL®, BC (California Energy Commission) approved

Applications:

- Cordless, rechargeable compact shop light that you can take anywhere
- Use under hood, under car, under dash

ECFSLIMRCAG

ECFSLIMRCA Slim Rechargeable Shop Light, Red
ECFSLIMRCAB Slim Rechargeable Shop Light, Blue
ECFSLIMRCABK Slim Rechargeable Shop Light, Black
ECFSLIMRCAG Slim Rechargeable Shop Light, Green
ECFSLIMRCAO Slim Rechargeable Shop Light, Orange

Rechargeable Utility Light

ECUB128A 128 LED Under Hood Light

- Light distributed 180° to illuminate the entire engine compartment
- Diffusion tube technology eliminates shadows
- 128 high-output LEDs create 700 lumens
- Light distributed 180° to illuminate the entire engine compartment
- Cordless design prevents entanglement while providing convenience
- Rechargeable Lithium-Ion 4400 mAh battery offers three hours of continuous light
- IP56 rated for water and dust resistance
- Under-hood bracket telescopes from 47"–71" to fit most vehicles

ECUB128A

Compact Shop Light Series

ECFHKY Mini Rechargeable Shop Light

- Six ultra-high-output surface-mount LEDs with rotating head
- Precision lens provides spread for even light distribution
- USB charging cable included
- Strong magnet in base to attach to all ferrous surfaces
- Run time 3 hours on high, 5 hours at 50% brightness
- Fully charges in 4–5 hours
- 90' angle of light coverage
- 2000 mAh Lithium-Ion battery

ECFHKY

4 LED Rechargeable Folding Shop Light

ECFPKTHP4 4 LED Rechargeable Folding Shop Light

- Four surface-mount diode LEDs offer a significant increase in brightness over previous model
- 1,200 mAh battery provides up to 2 1/2 hours of run time
- 90° light angle for broad illumination of workspace
- Belt/pocket clip to keep the light handy at all times
- Magnet on bottom base enables multi-angle use

ECFPKTHP4

12 LED Compact Lights

ECFONELITE 12 LED Compact Light, Red

- 12 SMD LEDs produce 100 lumens on high, 65 lumens on medium
- Uses 3AAA alkaline batteries for 7 hours runtime on high or 12 hours on medium
- Robust rubber boot protects the light from drop hazards
- Compact enough to take anywhere
- Super-Durable Super Portable
- Strong magnet on back attaches to ferrous surfaces
- Pocket clip for added versatility
- Dual position switch – 100% and 65% power levels
- Available in red, green and orange

ECFONELITEG 12 LED Compact Light, Green
ECFONELITEO 12 LED Compact Light, Orange

ECFONELITE

WARNING
• Do not remove or bypass the grounding prong on any electrical plug
• Read safety precautions on pages W1 to W4

LIGHTING: SHOP LIGHTS

ECU415BK

ECU444AKT

Single Tube

Stock No.	Lamp Style	Voltage	Bulb Type	Bulb Wattage	Bulb Length, inches	Cord Type	Cord Length, feet	Replacement Bulb	Overall Length, inches
ECU415BK	Tubular	120V AC	Single	15	17	18/2 SJTOW	25	ECU250A17	25
ECU444AKT	Tubular	120V AC	Single	15	41	18/2 SJTOW	25	ECU4443A	44 1/4

ECU415BK 15 W Fluorescent Utility Light
- Uses a single tube 15 W fluorescent bulb (ECU250A17)
- High impact material in handle and top cap for durability
- Cord length 25'

ECU444AKT Underhood Utility Light
- Fits hood widths from 47"–80"
- Uses a single 15 W fluorescent tube (ECU4443A)
- Padded hooks prevent damage to hood
- Flexible 25' cord resists oil and water

ECU325BK

ECU425ABK

Twin Tube

Stock No.	Lamp Style	Voltage	Bulb Type	Bulb Wattage	Bulb Length, inches	Cord Type	Cord Length, feet	Replacement Bulb	Overall Length, inches
ECU325BK	Tubular	120V AC	Twin	13	7	18/2 SJTOW	25	ECU325-4	13
ECU350BK	Tubular	120V AC	Twin	13	7	18/2 SJTOW	50	ECU325-4	13
ECU425ABK	Angle Head	120V AC	Twin	13	7	16/3 SJOW	25	ECU325-4	14

ECU325BK 13 W Compact Fluorescent Utility Light
- High-impact material in handle and top cap for durability
- Diffuser optimally spreads light transmission
- Metal hanging hook for flexibility

ECU350BK 13 W Compact Fluorescent Utility Light
- High impact material in handle and top cap for durability
- Diffuser optimally spreads light transmission
- Metal hanging hook for flexibility

ECU425ABK 13 W Angle Head Fluorescent
- Case and lens made from impact-resistant proprietary material
- Ratcheting metal hanging hook for better positioning
- 25' cold weather cord is flexible to -58° F, resists chemicals and abrasions
- Uses ECU325-4 rough service bulb

ECU325-4 Rough Service Bulb
- Silicon cocoons internal components in base to extend starter life
- Superior durability in harsh conditions
- Fits most twin tube 13 W lights

ECU300

Utility Light Accessories

ECU300 Magnetic Utility Light Clamp
- Expandable clamp on a magnetic base
- Can be used with many fluorescent utility lights or D cell flashlights

LIGHTING: FLOOD LIGHTS

ECFLOOD

Flood Light

Stock No.	Lumens	Brightness	Weight	Dimensions, inches (mm)	Cable Gauge	Operating Voltage	Power Consumption	Temperature Range	Cable Length
ECFLOOD	2,500	4,000 lux @ 0.5m	4.85 lb (2,200 g)	8.78" W x 8.39" H x 3.03" D (223 mm W x 213 mm H x 77 mm D)	18AWG	Input: 110V/50–60Hz Output: 24V DC (cord volts)	35W	-4 °F–104 °F (-20 °C–40 °C)	25' (7.62m)

ECFLOOD LED Flood Light
- Powerful and uniformly bright illumination from 70 high-output SMD LEDs
- Compact, robust construction with aluminum frame protected by rubber edge work
- IP65 resistant to water and dust infiltration
- Various uses requiring extreme illumination, general repair, body shop use, under car, construction and home improvement

EXTENSION CORDS

Extension Cords (Blue-Point®)

EC267D Extension Cord
- 25', 16/3 gauge SJTW cord stays flexible in cold weather
- Oil and water resistant

EC268D Extension Cord
- 50', 16/3 gauge SJTW cord stays flexible in cold weather
- Oil and water resistant

EC267D EC268D

FLEXIBLE LIGHTS/MAGNIFIERS

Flexible Lights *(Blue-Point)*

ECF1600 Bendable Light
- 10" flexible shaft with high-intensity lamp
- Heavy duty barrel handle and switch
- Includes two AA batteries

YA5100B Bendable Light
- 15" flexible shaft with 24" extension cover for added reach
- Brilliant krypton lamp runs on two AA cells

YA5100B-1 Flashlight Switch
- Replacement switch for YA5100B

YA5100-2 Flashlight Bulb
- Replacement bulb for YA5100B

ECF1600

YA5100B

Magnifier

YA537 Pocket Magnifier
- Folding magnifier includes dual 3x lenses for combined 6x effect

YA537

⚠WARNING
- Do not remove or bypass the grounding prong on any electrical plug
- Read safety precautions on pages W1 to W4

FLUID MAINTENANCE: FLUID TRANSFER SERVICE EQUIPMENT

Fluid Evacuators and Transfer Pumps

Easily remove engine gear and transmission oil, coolant and brake fluids. Unit creates vacuum, providing a clean, fast and simple way to evacuate or dispense a wide range of fluids. 8 L auto shutoff prevents overflow. 2.3 gal (8.8 L) total capacity. Durable polyethylene construction is impervious to automotive and household chemicals.

VAC201

VAC300

VAC201 Manual Fluid Evacuator/Dispenser
- No electrical or compressed air required
- Sturdy base with exterior pump helps prevent tipping
- Complete system includes manual fluid evacuator, main hose assembly (5/16 I.D. x 54" long) plus two rigid dipstick tubes for engine oil removal (3/16 I.D. x 34" and 1/8 I.D. x 34")

VAC300 Pneumatic Fluid Evacuator
- Quiet operation results from air muffler on the Venturi® pump
- Unit can be used away from air source by creating a vacuum, closing both shutoff valves and transporting unit to the job
- Connect tubing and release valves to evacuate fluid
- Complete system includes air-operated fluid evacuator with *Venturi* and air shutoff valve on base, main pour spout connector, main hose assembly (5/16 I.D. x 58" long), brake bleeding hose assembly with in-line fluid control (1/4 I.D. x 60" long) plus two rigid dipstick tubes for engine oil removal (3/16 I.D. x 34" and 1/8 I.D. x 34")

FLUIDPUMP

FLUIDPUMP Fluid Transfer Pump
- Transfer/siphon all types of fluids, including coolant, oil, transmission fluid and water
- Use to inflate sports balls, bicycle tires, flotation devices and more
- Durable, non-corrosive polyethylene
- Includes pump, two 4' lengths of fluid hose, two intake/discharge hose connectors, air pressure hose, dipstick tube and dipstick/fluid hose adaptor

TECHNICAL SUPPORT 1-877-776-8486



EEFS505012

EEFS106AC2

Fuel System Maintenance

EEFS505012 Fuel System Cleaning Fluid (Blue-Point®)
(12) 17 oz cans of fuel system cleaning fluid for Fuel System Decarbonizer EEFS505A.

EEFS106AC2 Diesel Engine Detergent
- Professional detergent for cleaning diesel engines
- Four 32 oz bottles
- Use to remove contaminants in engines and fuel systems
- Includes six units of three-step cleaner
- Each unit includes one bottle of air intake cleaner, one bottle of combustion chamber cleaner and one bottle of fuel conditioner
- Use with EEFS103 series of diesel tune decarbonizing equipment

EEFS308A5 Filter Pack
Replacement filter pack for EEFS305A FuelKare™ Fuel Service System.

AEC061004011 Fuel System Cleaning Solution
Four 1 L bottles of fuel system cleaning solution for the EEFS305A *FuelKare* Fuel Service System.

A106

S3624

A127

OFSKIT

Filter Sockets

A106 Oil Filter Socket
- Low-profile (1.68 O.D. x 1.04" long) 6-point design to remove the plastic oil filter on GM® Ecotec®, 2.0 L, 2.2 L and 2.4 L, 4 cylinder engines
- Features the Flank Drive® wrenching system
- Chrome finish for longer life and easy cleanup
- Wrench size: 1 1/4" (32 mm); 3/8" square drive

Applications: Saturn®: L-Series (2001), ION® and Vue (2002 and later), *GM*: Cavalier, Sunfire®, Grand Am®, Sonoma, S10, Alero, (2002 and later), Pontiac®: G6 and Solstice® (2006), Chevrolet®: HHR, Cobalt, Cobalt SS (2006), Malibu® (2002–2006), Saab®, some general applications

S3624 Filter Flip Socket
- One tool will remove/install all three filter caps on Ford® 6.0 L Power Stroke® diesel powered vehicles such as Super Duty Series Pickups, Econoline® Vans and Excursions®
- Use for removal and installation of the oil filter cap plus primary and secondary fuel filter caps on these vehicles
- Not impact use
- Requires optional 3/8" drive extension (FX1 or FXWP1 1 1/2" long). Additional 24 mm Applications
- Buick® vehicles: VVT-V6 Rendezvous Ultra, LaCrosse CSX
- Cadillac® vehicles: VVT-V6 CTS, STS, SRX
- *Saturn* vehicles: L-3000 V6. Additional 35/36 mm

Applications/Specifications
- Audi®/Volkswagen®: VR6 engine
- BMW®: 6, 8 and 12 cylinder engines
- Mercedes-Benz®: diesel engines
- Mini-Cooper® engines or vehicles
- Volvo®: 40 and 50 series, XC90 with 3.2 L 6 cylinder engine S3624 Specifications
- Square Drive Size: 3/8"
- Wrench Sizes: 24 mm and36 mm
- Wrenching Configuration: *Flank Drive*
- OD Major: 1.80" (45.7 mm)
- OD Minor: 1.38" (34.9 mm)
- Length: 1.73" (43.9 mm)
- Finish: Nickel/Chrome

A127 Oil Filter Socket
- Remove and install 27 mm (1 1/16") oil filters on 2003 and later *Mercedes* 1.8 L 4 cylinder engines
- Additional applications: aftermarket oil filters with 1" nut at the top of canister
- 1 1/16" wrench size, 3/8" drive

OFSKIT Oil/Fuel Filter Socket Set
- Includes: A127 and A106 oil filter sockets, S3624 filter flip socket and A129 fuel filter socket for Cummins® Diesel (4pc) in storage tray

S9615A

Pan Plug Wrench

S9615A 12-Point Fractional/Metric Box Wrench
- 9/16" and 15 mm 12-point box ends fit most popular *GM* drain plugs
- 10° offset at each end for maximum clearance
- Both box ends feature *Flank Drive* wrenching system
- 9 23/32" long

Oil Filter Crusher (Blue-Point®)

CRUSH1A Oil Filter Crusher
- Removes approximately 95% of excess oil from spent filters
- Features self-lubricating seal
- 10,000 lb of crushing force with simple hookup to 60–120 PSI air line
- 10–15 second time cycle
- Pivoting door prevents oil from dripping into work area when loading or unloading filters
- Won't operate when door is open
- Crushing chamber is 8 1/2" H x 6" square
- Height 23"; Weight 70 lb

CRUSH1EX100 Air Filter

CRUSH1A

⚠WARNING
- Do not use chrome or industrial finish hand tools with impact drivers
- Read safety precautions on pages W1 to W4

LUBRICATION: OIL FILTER

YA4050B

YA4275

YA4250

YA4274A

YA4022

Oil Filter Pliers

YA4050B Oil Filter Pliers (Blue-Point®)
- Grips oil filters for easier removal
- Jaws are offset 20° from handle to increase accessibility
- Jaw opening range of 2 1/4"–4"
- 12" long

YA4275 Oil Filter Pliers *(Blue-Point)*
- Use on filters from 4 1/4"–7" (108 mm–178 mm) diameter
- Spring action size adjustment assures a solid grip on filter
- Offset handle offers increased accessibility
- Heavy duty forged levers
- Cushioned grips for comfort
- Industrial black finish
- Overall length 19"

Applications: Include truck, tractor and high torque diesel engines

YA4250 Oil Filter Pliers *(Blue-Point)*
- Slip joint design provides jaw opening range of 3 5/8"–6"
- 12" long

YA4274A Oil Filter Pliers *(Blue-Point)*
- Use on filters from 2 1/2"–5 1/4" diameter
- Offset handle offers increased accessibility
- Heavy duty forged levers
- Cushioned grips for comfort
- Industrial black finish
- Overall length 13 1/2"

YA4022 Long Reach Oil Filter Pliers *(Blue-Point)*
- Removes stubborn and overtightened oil, fuel and hydraulic filters plus fuel sending units and more
- Easy to maneuver around hot exhaust manifolds
- 23" long with tremendous holding power
- 32 teeth jaws adjust to two sizes for optimum grip

YA995

A91E

YA342C

OFW12418

GA333C

FWA6296A

FW656714A

Oil Filter Wrenches

Stock No.	Size	Steps	Flats	Style	Sq. Dr., inches	Application
YA995*	3"	2	15	Cup	3/8	Fram®, AC®, Wicks®, NAPA®, Sears®, Motorcraft®, Hastings® and Baldwin® filters. Has 1" external hex.
YA996*	76/80 mm	2	14/15	Cup	3/8	OEM® and Purolator® filters on VW®, Nissan®, and Toyota®. Has 1" external hex.
A91E	—	—	—	Strap	—	Large diameter oil filters 1"–6". Includes both 3/8" and 1/2" square drives.
YA342C*	—	—	—	Band	1/2	For 4 5/8"–5 1/4" diameter filters
OFW12418*	—	—	—	Band	1/2	4 1/8"–4 21/32" (105 mm–118 mm) oil filters
OFW125532*	—	—	—	Band	1/2	5 5/32"–5 21/32" (130 mm–143 mm) oil filters. Similar to OFW12418.
GA333C*	—	—	—	Band	Handles	2 7/8"–3 1/4" diameter oil filters
GA340A*	—	—	—	Band	Handles	3 1/2"–3 7/8" diameter oil filters. Similar to GA333C above.
YA341A*	—	—	—	Band	Handles	4 1/8"–4 7/16" diameter oil filters. Similar to GA333C above.
FWA6296A*	62/96 mm	—	—	Adjustable	3/8	Adjustable filter wrench for 62 mm–96 mm diameter oil filters. 3/8" square drive, 3/4" external hex.
FWA62121A*	62/121 mm	—	—	Adjustable	3/8	Adjustable filter wrench for 62 mm–121 mm diameter oil filters. 3/8" square drive, 3/4" external hex.
FW656714A*	65/67 mm	2	14	Cup	3/8	*Fram*-PH4386, PH4967, PH6017, PH6018 and PH6607
FW7614A*	76 mm	1	14	Cup	3/8	Champion®, Champ®, Lee®, *Purolator*, Mopar®, *VW*, Porsche®, BMW®, Mercedes®
FW9315A*	93 mm	1	15	Cup	3/8	Casite®, *Champ*, *Champion*, GM®, *Fram*, *Hastings*, *Purolator*, Wix®, *Nissan*, *VW*, *Porsche*, Renault®
FW757715A*	75/77 mm	2	15	Cup	3/8	*NAPA*, *AC* Delco®, Castrol®, STP®, Penske®
FW7630A*	76 mm	1	30	Cup	3/8	*Fram*, IAPCO®, *Motorcraft*, Parts Plus®, Pennzoil®
FW8015*	80 mm	1	15	Cup	3/8	*Motorcraft*, *Parts Plus*, Penske®, *Purolator*

**Blue-Point*

OFTOY468 Oil Filter Wrench
- Oil filter wrench for cartridge type filters found on Toyota®, Lexus® and Scion® vehicles
- Manufactured from heavy duty chrome vanadium material
- Will withstand loads required to remove over tightened or frozen oil filter covers
- 1/2" square drive and 24 mm (15/16") hex
- 65 mm across flat
- Manufactured from heavy duty chrome vanadium materia

OFTOY468

OFWTOY3KTA Toyota Oil Filter Wrench Kit (3pc)
- Deliver maximum torque for easy removal of To*yota o*il filter canisters
- Engages filter housing at multiple contact points
- Engages end flutes and housing exterior
- Drain hose assembly included to aid in the oil draining process on those models equipped with a drain on the filter cap
- One wrench for 4 cylinder vehicles and one for the 6 and 8 cylinder models

OFWTOY3KTA

F**WK7A Oil Filter Wrench Set (Blue-Point®)**
- Wrenches in set cover 95% of US and import automobile and light truck oil filters
- Storage/carrying case keeps wrenches together for quick access
- Includes laminated application chart
- FWK7A set includes FW656714A, FW757715A, FW7614A, FW7630A, FW8015, FW9315A and FWA62121A oil filter wrenches

FWK7A

Swivel Oil Filter Wrenches *(Blue-Point)*

OFW1 Oil Filter Wrench
- Fits small oil and fuel filters 2 3/8"–2 5/8"

OFW2 Oil Filter Wrench
- Fits smaller filter size on many US and imported vehicles 2 7/8"–3 1/4"

OFW3 Oil Filter Wrench
- Fits most popular 3.625" filters 3 1/2"–3 7/8"

OFW4 Oil Filter Wrench
- Fits most tractors and other farm implement equipment 4 1/8"–4 1/2"

OFW4KT Oil Filter Wrench Set
- Set includes OFW1, OFW2, OFW3 and OFW4 Swivel Oil Filter Wrenches

OFW4KT

WARNING • Read safety precautions on pages W1 to W4

LUBRICATION: GREASE AND OIL

OFTOY38

OFA38

OFHON33

OFA33

OFGMFORD

OFA35

OFHARLEY

OFHD

Funnels/Spouts

OFTOY38 Oil Filler for Toyota®/ Lexus®/Scion®
- Fits all *Toyota, Lexus* and *Scion* models (except *Toyota* Prius®) with threaded oil filler cap
- Prevents unwanted mess by sealing onto filler neck

OFA38 Oil Funnel Adaptor for OFTOY38
- Two-piece adaptor set for select *Prius* and Yaris® vehicles
- Custom fit to the valve cover filler neck
- Made of durable plastic

OFHON33 Threaded Oil Filler
- Prevents unwanted mess by sealing onto filler neck

Applications:
Honda® (Accord®, Civic®, Element®, Fit, S2000) vehicles; Acura® (All models except MDX and RDX); Nissan® (most models); Dodge® Cummins® Turbo Diesels from 2001–2008; Ford® Turbo Diesel trucks (9.0 L, 6.4 L, 6.9 L and 7.3 L)

OFA33 OFA33 Oil Funnel Adaptor for OFHON33
- Two-piece adaptor set for select *Honda* vehicles
- For the following Acura® vehicle: MDX
- For the following *Honda* vehicles: Pilot®, Ridgeline®, Odyssey®
- Made of durable plastic
- Custom fit to the valve cover filler neck

OFGMFORD Threaded Oil Filler

Applications: Chevy®: Cobalt, Silverado®, Tahoe®, Trailblazer® and Vans; GMC®: Sierra, Envoy®; Pontiac®: Grand Prix®, G6®; Saturn®: SL1; Cadillac®: CTS; Ford®: Explorer®, F150®, Mustang®; Mercury®: Mountaineer®. Prevents unwanted mess by sealing onto filler neck.

OFA35 Oil Funnel Adaptor for OFTOY38
- Made of durable plastic
- Custom fit to the valve cover filler neck
- Two-Piece Set: OFA35-1 short adaptor with male threads OFA35-2 elbow adaptor

Applications:
2013–2014 *GMC* Sierra and *Silverado* vehicles

OFHARLEY Motorcycles Oil Filler for Harley-Davidson®
- Prevents any unwanted mess; fastens and seals onto filler neck
- ABS plastic
- Smooth surface so not to scratch painted surface
- For *Harley Davidson* Touring bikes and Dyna series motorcycles 2007–present
- Additional Kia® Applications: Forte (2013–current), Rio (2013–current), Soul (2013–current), Sorento® (2011–current), *Sorento* (2011–current), Sportage® (2014)

OFHD Motorcycles Oil Filler for *Harley-Davidson*
- Allows access to the fuel filter and pump as the lock ring is connected to the pump
- Oil filler for 1999–2006 *Harley-Davidson* Touring Motorcycles with the “Push in Style” oil caps
- Prevents any unwanted mess; fastens and seals onto filler neck
- ABS plastic
- Smooth surface will not scratch painted surface

OFKIT

OFKIT Master Oil Funnel Kit
- Made of durable ABS plastic
- No need to hold funnel while pouring in oil
- Fastens and seals to filler neck to prevent spills
- Kit includes a 45° angled extension to avoid obstructions
- Funnel and five adaptors fit hundreds of vehicles including Acura®, Ford®, GM®, Honda®, Hyundai®, Jaguar®, Land Rover®, Lexus®, Mazda®, Nissan® and Toyota®

FUNN1

FUNN15

FUNN2

GA96B

Funnels/Spouts cont.

Stock No.	Size	Neck Style	Screw Caps	Color
FUNN1*	1 pint	Small	•	Orange
FUNN15*	1.5 qt	Large	•	Red
FUNN2*	1.25 qt	Large	•	Blue

*Blue-Point®

GA96B Transmission Filler *(Blue-Point)*
8 1/2" oval funnel with filter screen. 30" long.

YA734A

YA728A

YA4190A

GA471

GA472

GA473A

Manual Grease Guns

Stock No.	Specification	PSI	Loading	Capacity	Flexible Hose	Rigid Extension	Nozzle
YA734A*	Pistol Grip	6,000	Bulk or Cartridge	16 oz Bulk and 14 1/2 oz Cartridge	18"	6"	—
YA728A*	Lever	6,000	Bulk or Cartridge	16 oz Bulk and 14 1/2 oz Cartridge	18"	6"	—
YA4190A*	Mini	—	Cartridge	3 oz	—	—	—
GA471*	Pistol Grip	4,500	Bulk, Cartridge or Filler Pump	3 oz	—	5 1/2"	8 1/4"
GA472*	Pistol Grip	5,000	Bulk, Cartridge or Filler Pump	14 oz	—	3 1/2"	13 1/4"
GA473A*	Lever	10,000	Bulk, Cartridge or Filler Pump	14 oz	—	5 3/8"	19 1/4"

*Blue-Point

YA775

YA771B

YA772B

Air Powered Grease Guns

Stock No.	PSI	Air Operating PSI	Pump Ratio	Loading	Capacity	Flexible Hose	Rigid Extension	Nozzle
YA775	6,000	100	60:1	Bulk, Cartridge or Filler Pump	14 oz Cartridge	—	7 1/2"	—
YA771B*	6,000	35–80	40:1	Bulk, Cartridge or Filler Pump	14 oz Cartridge	18"	6"	—
YA772B*	4,000	40–100	40:1	Bulk, Cartridge or Filler Pump	14 oz Cartridge	18"	6"	—

*Blue-Point

WARNING • Read safety precautions on pages W1 to W4

LUBRICATION: GREASE AND OIL

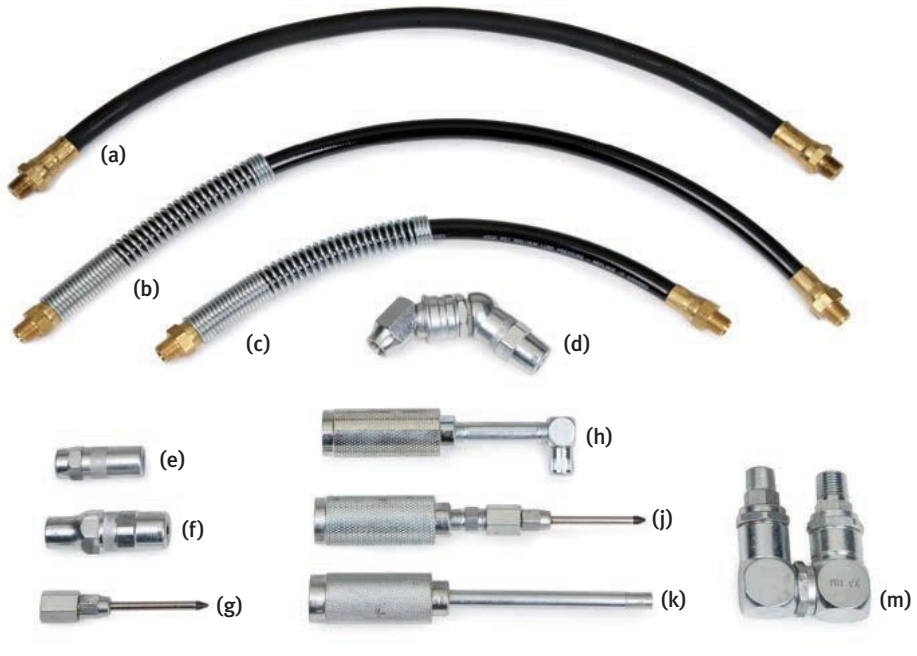

YA7500

YA747

YA801

Dispensing Accessories (Blue-Point®)

YA7500 Grease Dispensing Accessory Pack
- Includes YA760–YA750 in a storage tray

(a) YA758 Flex Whip Hose
- For hand-operated grease guns only, 18" long

(b) YA752 Flex Whip Hose
- 18" long version of YA751

(c) YA751 Flex Whip Hose
- For powered and hand operated grease guns
- 4,500 maximum PSI, 12" long

(d) YA754 Swivel Coupler
- Swivels 360°, locks in position every 45°

(e) YA755 Coupler
- Fits all hydraulic type grease fittings

(f) YA753 Heavy Duty Coupler
- Fits all hydraulic type grease fittings

(g) YA750 Needle Nozzle
- 2 3/4" long

(h) YA757 Angle Lube Adaptor
- 4 1/2" long with 90° head allows fast and complete lubrication of steering and suspension systems on late model FWD vehicles

(j) YA761 Needle Nozzle Coupler
- This is the YA750 with a locking sleeve adaptor for quick attachment to a hydraulic coupler

(k) YA756 Extension Coupler
- Lubricates recessed fittings, 6" long
- Locking sleeve adaptor allows quick attachment to hydraulic coupler of any control valve or lever gun

(m) YA760 Universal Swivel
- High pressure swivel, 5,000 maximum PSI
- 1/2"-27 male x 1/4" NPT(m) threads

YA747 Grease Control Valve
- 1/4" NPT(f) inlet, 7,500 maximum PSI
- Includes 6" extension tube and YA753 coupler

YA801 Needle Type Adaptor
- 4 7/8" long adaptor for universal joint fittings, water pumps and metal covered springs

GA472-2 Grease Fitting Coupler
- Push-on design with neoprene nipple and ball
- Features spring check valve

GA472-9 Flexible Polybraid Hose
- Oil, grease and solvent resistant with brass end fittings

Grease Fitting Cleaner

UFREE1 Grease Fitting Cleaning Tool
- Quickly and easily frees up joints and fittings for proper greasing and lubrication
- Inject light viscosity oil into the grease joint via the grease fitting to break up and remove dirt, rust and debris
- Pump in new grease after freeing the joint
- Includes injection cleaning tool, 4 3/4" long flexible hose to access tight places and storage case

UFREE1

Oil Spray and Suction Guns

YA746 Oil Spray Gun
- Siphon type spray gun for spraying lubricating oils, cutting oils and cooling oils
- Includes 6' vinyl suction hose with strainer

YA745A Oil Spray Gun (Blue-Point®)
- 16 oz capacity
- Fast, clean method for removing or adding transmission and gear oil
- Special follower is impervious to oil, grease and water

YA746

YA745A

Bearing Packers

A180A Manual Bearing Packer
- Simultaneously pressure packs inner and outer wheel bearings 3/4" minimum ID and 4" maximum O.D.
- Use with pressurized lube equipment or hand grease gun
- Includes dust cover

YA470C Manual Bearing Packer *(Blue-Point)*
- Packs 50–65 bearings with one grease filling
- Apply manual pressure to flush and pack bearing with grease
- Includes dust cover
- 4 1/2" high

YA742 Manual Bearing Packer
- Unit features large packer head
- Handles bearings to 9 1/2" O.D. and minimum 9/16" I.D.
- Includes adaptor to service smaller bearings of 1–1 3/4" O.D.

A180A

YA470C

YA742

WARNING • Read safety precautions on pages W1 to W4

LUBRICATION: GREASE AND OIL

YA739

YA737

YA738

Grease and Gear Oil Pumps/Manual

YA739 Manual Gear Oil Pump
- Fits any 25 lb–50 lb original refinery container
- Delivers 1 oz per stroke using SAE 90 gear oil at 70 °F
- Includes 5' of 1/2" low-pressure hose with dispensing nozzle

YA737 Manual Operating Grease Pump
- Clamps securely to any 25 lb–50 lb original refinery container
- Handles any ball or roller bearing with 5/8"–1 1/2" I.D. and 3 1/4" maximum O.D.
- Primes and pumps even when using heavy grease at low temperatures
- Follower plate prevents funneling of grease

YA738 Manual Gear Oil Pump
- Fits any 120 lb original refinery container
- Powerful 50:1 ratio pump with 20 cu-in displacement
- Includes rollaround base, straight swivel, 7' of 1/4" high-pressure hose, quick connect air coupler, follower plate, YA747 grease control valve and YA760 universal swivel

YA736

YA759

Grease Pumps/Air

YA736 Air Powered Grease Pump
- Fits any 20 lb–50 lb original refinery container
- Powerful 50:1 ratio pump utilizes 20 cu-in displacement
- Includes: 6' of 1/4" high-pressure hose, quick connect air coupler, follower plate, YA747 grease control valve and YA760 universal swivel

YA759 Air Powered Grease Pump
- 50:1 ratio pump
- Uses 120 lb container size and handles all grades of lubricant
- Features internal muffler for quiet operation and a prelubricated air motor requiring no external oiler
- Exclusive microlapped hardened steel air valve and seat to assure a long and productive service life, no packings to wear out
- Shovel-type foot valve adds mechanical priming to normal suction
- Casters offer unit mobility
- Does not include barrel

YA762

Dollies

YA762 Band Dolly
- Provides mobility for 25 lb–50 lb original refinery containers
- Includes jam swivel casters and screw clamp for secure adjustment

PBT5X29

Transmission Table

PBT5X29 Transmission Table (Shown with Optional Drawer)
- 5' long

PBT2120 Drawer
- Optional drawer
- 20" x 20" x 5"

YA743

YA749

Drains

YA743 Waste Oil Drain
- Fits standard 16 gal drum
- Includes: float gauge in drum cover, telescopic drain bowl adjustable from 42 3/4"–70" and roll around base (drum not included)

YA749 Drain
- 24 1/2" diameter
- Fits 6" or larger drain bowls
- Prevents spillage when removing transmission pans

A172A



Drum Plug

A172A Drum Plug Socket
- One socket removes virtually all screw-in drum plugs or caps
- Spring-loaded inner wrench handles smaller plugs and recesses automatically when removing large plugs
- Use with a 1/2" drive ratchet or impact wrench

Oilers (Blue-Point®)

OC5A Oiler
- 5 1/2" small pressure oiler has a long, tapered spout with a screw on tip
- 1 7/8" O.D.
- Includes base holder

OCF5 Oiler
- Similar to OC5A Oiler with a flexible spout

OC5A

OCF5

Engine Calibration and Setup Kit *(Blue-Point)*

YA871 Whistle Alert (Flexible)
- Insert Whistle Alert into any 14 mm spark plug hole, turn the engine over and listen for the whistle to locate top dead center for the compression stroke

YA870 Whistle Alert (Rigid)
- Same as YA871 except it can also be used with YA866 compression gauge extension

YA8661 Spark Plug Hole Adaptor
- Adapts the 14 mm thread on YA866/YAL866 TDC Indicators, YA868 compression gauge extension and YA865 engine lock to accommodate 18 mm spark plug threads

YA8662 Spark Plug Hole Adaptor
- Adapts the 14 mm thread on YA866/YAL866 TDC Indicators and YA868 compression gauge extension to accommodate 12 mm spark plug threads

YA8661

YA8662

YA9680

YA1150

ML6000

CC100

YA9730

ML6000COMBO

Timing

YA9680 Camshaft Pulley Tool *(Blue-Point)*
- Designed to hold the camshaft pulley in place while turning the center shaft bolt
- Extremely useful on transverse mounted V6 engines such as Nissan® Maxima®/VG30 engine and Toyota® Camry®/3VXFE and 1MZFE engine
- Rear pulleys on these vehicles are located in close proximity to the shock tower making it difficult to remove/replace the center shaft without this tool

YA1150 Small-Pin Cam Gear Holder *(Blue-Point)*
- Small diameter (10 mm) grooved pins fit snugly into the small holes in the cam gear.
- Long handle with cushioned grip provides excellent leverage so the cam gear bolt can be tightened or loosened
- This tool is a companion to YA9680, which has larger diameter pins for cam gears with larger holes

YA9730 Timing Belt Tensioner Compressor *(Blue-Point)*
- For 1995 and later T-100, Tacoma® and 4Runner®
- Turn square compress tensioner, then install locking pin (YA9730-5 included with YA9730)

ML6000 Cam Lock Tool/Timing Gear Clamp *(Blue-Point)*
- Prevent engine damage resulting from incorrect timing
- Maintain valve timing during belt replacement on twin and quad cam engines
- Compact design allows access in transverse engines
- Fits timing gear diameters from approximately 4"–6" (101 mm–152 mm)
- Fits gear spacing approximately 0.06"–3" (1.6 mm–76 mm)

CC100 Single Cam Clamp *(Blue-Point)*
- Single cam clamp can be used on engines where the dual clamp ML6000 will not fit
- Compact design permits easy operation in confined engine areas
- Prevent engine damage resulting from incorrect timing
- Maintain valve timing during belt replacement on twin and quad cam engines
- Simple and easy to use
- Manufactured from high-strength industrial polymers which will not corrode or damage engine pulleys

ML6000COMBO Cam Clamp Set *(Blue-Point)*
- Includes four CC100 single cam clamps and one ML6000 dual cam clamp in storage tray

WARNING • Read safety precautions on pages W1 to W4

ENGINE SERVICE: SERVICE TOOLS

CGH1236

YA4660

MCH1280

ML5000

TGH15

TSK5KT

Timing

CGH1236 Cam-Gear Holder
- Tool holds the hex at gear hub making removal and tightening of cam gear bolt easy and accurate
- Hole at center of the tool allows a socket to be inserted through the tool for removal and replacement of the cam gear bolt
- Fits a large number of vehicles, 18 different models from 1995–2011

YA4660 Camshaft Sprocket Holding Tool (Blue-Point®)
- Pivoting design allows fit in most cam and injection pump gear sizes
- Detent grooves on holding pins gives user a sure hold
- Use as a counter holder when loosening or tightening sprocket retainer bolts

MCH1280 Cam Holder for Mercedes® Vehicles
- This tool ensures that the cam does not move, enabling the tech to complete the job without any worry of needing to re-time the motor
- Unique tool designed to lock the left intake cam in place while servicing the cam chain drive system
- Lock placed in rear intake cam and bolted to cylinder head locking the cam keeping it from rotating – reduces chance of mistake in the cam timing
- Keeps related components in time with each other, eliminating need for additional man hours to hold cam in place

Applications
- Used on 272 and 273 Series *Mercedes Benz* engines

ML5000 DOHC Lock Tool *(Blue-Point)*
- Locks cam shaft sprockets in place to preserve engine timing during belt or chain replacement
- Knurled pins on unit lock on to the groove on the inside of the cam wheel
- Unit base is constructed from anodized aluminum
- Pins are steel
- Works with most import and US cars and light trucks

TGH15 Timing Gear Holding Tool *(Blue-Point)*
- Securely holds timing gear during removal and installation

TSK5KT Timing Service Kit *(Blue-Point)*
- Complete kit for timing belt replacement and service
- Securely holds timing gear during removal and installation
- Allows rotation of cam gear to align valve timing marks
- Single-lever locking design is easy to use
- Slimline design allows maximum access
- Kit includes TGH15 Timing Gear Holding Tool and CC100PK Single Cam Clamp Set

A121A

A119B

A120

S6152

YA6555

EEPV507

A121A Oil Pressure Sender Switch Socket
- For 1987 and later Ford®, GM® and Chrysler® vehicles
- 1 3/16", 12-point wrench size, 3/8" drive
- 3 11/16" long

A119B Oil Pressure Sender Switch Socket
- For 1986 and earlier *Ford*, *GM* and *Chrysler* vehicles
- 1 1/16" special wrench configuration, 3/8" drive
- 2 1/16" long

A120 Oil Pressure Sender Switch Socket
- For 1987 and later *Ford*, *GM* and *Chrysler* vehicles
- Can also be used for 1999 Mitsubishi® Eclipse® with the 2 L DOC non-turbo 420A engine
- Same design as A119B but longer
- 1 1/16" special wrench configuration, 3/8" drive
- 3 11/16" long

S6152 Oil Pressure Sender Switch Crowfoot Wrench
- Same applications as A119B but designed for switches with difficult access
- 1 1/16" wrench opening, 3/8" drive

YA6555 Oil Pump Removal Tool for *GM* Vehicles (Blue-Point®)
- Designed to work on most *GM* V6 engines
- No need to remove the intake manifold
- Makes removal of the oil pump drive fast and easy

Applications: *GM* 2.8 L V6 (1987–1989), 3.1 L V6 (1990–1994), 3100 V6 (1994–2005), 3.4 L V6 (1999 and later)

Oil Pressure

EEPV507 Oil Pressure Gauge Set
- Use on diesel and gasoline engines
- Includes standard and metric adaptors for most US and import cars, trucks, tractors and stationary engines
- Includes: 0–100 PSI (0–700 kPa) gauge assembly

Part Number	Description
EEPV5F-1	2" Pipe Nipple
EEPV5F-2	1/4" M x 1/8" F Hex Bushing
EEPV5F-3	3/8" M x 1/8" F Hex Bushing
EEPV5F-4	1/8" FNPT Coupling
EEPV5F-5	1/8" M x 1/8" F Street Elbow
EEPV5F-6	1/8"-28 BSPT
EEPV5F-7	M10 x 1.0 Tapered Thread
EEPV5F-8	M10 x 1.0 Adaptor
EEPV5F-9	M10 x 1.25 Adaptor
EEPV5F-10	M12 x 1.5 Adaptor
EEPV5F-11	M12 x 1.75 Adaptor
EEPV5F-12	M14 x 1.5 Adaptor
EEPV5F-13	M16 x 1.5 Adaptor
EEPV5F-14	M18 x 1.5 Adaptor
EEPV5F-15	5/16"-24 Adaptor
EEPV5F-16	7/16"-20 Adaptor
EEPV5F-0	Male Quick Connect Plug
EEPV5-100G	Pressure Gauge and Boot Assembly (100 PSI)
EEPV5-BOOT1	Gauge Boot
EEPV507-H	Hose Assembly
EEPV507-PB	Plastic Box

Drain Plugs

PMP410A Internal Metric Pipe Plug Socket
- 10 mm female square
- For removing or replacing standard transmission drain plug
- 3/8" drive, 3/4" O.D., 1" long
- Female pipe plug socket (for Renault® LeCar)

PMM410A External Pipe Plug Socket
- 10 mm male square
- For removing or replacing oil pan plug
- 3/8" drive, 11/16" O.D., 1" long

S5902 Oil/Transmission Plug Wrench
- Box ends are 17 mm, 6-point and 21 mm, 12-point
- Designed for VW® transmission drain plugs
- 258 mm long

PMP410A

PMM410A

S5902

⚠WARNING

- Do not use chrome or industrial finish hand tools with impact drivers
- Read safety precautions on pages W1 to W4

ENGINE SERVICE: SERVICE TOOLS

GDCT16

S6132A

S6160

S6194

S6214

YA6611

FRT12

Cylinder Head

GDCT16 Combustion Leak Tester
- Provides an easy and quick way to diagnose engine overheating problems
- Checks for leaks between the combustion chamber and the cooling system
- Test head and gasket for combustion leaks before removing the radiator
- Double chamber in testing unit provides a high level of accuracy
- For use on water-cooled gas and diesel engines
- Kit includes complete test chamber, 16 oz bottle of testing fluid and instructions

GDCT161 Leak Detector Fluid (Blue-Point®)
- 16 oz bottle of leak testing fluid for the GDCT16 combustion leak tester

S6132A Metric Valve Cover Bolt Socket
- For GM® vehicles, 1976 and later Honda® vehicles and other import and US vehicles
- 10 mm, 12-point wrench size
- Allows access to head bolts, valve and rocker covers and oil pan bolts
- Deep clearance for bolts with extended tip as used on spark plug wire harness
- 3/8" drive; 11/16" O.D.
- 4 1/8" long

S6160 Extra Long Head Bolt Socket
- Use on 1986 and later Nissan® engines with 12 mm head bolts
- 8" length reaches past cam and rocker assembly to service head bolts
- Thin-profile socket and shank will reach through access hole and past overhead camshaft
- Additional high torque applications include removal and installation of universal joint flange bolts on Ford®/Mercury® cars such as Mustang®, Crown Victoria® and Lincoln®, plus *Ford* Explorer®, Ranger® and F150®/F250® trucks
- 12-point, industrial finish, 1/2" sq. drive

S6194 Head Bolt Socket
- Use on Toyota® and *Nissan* cars and trucks and *Honda* cars with 12 mm head bolts
- 4 1/8" length reaches past cam and rocker assembly to service head bolts
- Thin-profile socket and shank reach through the access hole and past overhead camshaft
- Additional high torque applications include removal and installation of universal joint flange bolts on *Ford Explorer*, *Ranger* and *F150/F250* trucks
- 12-point, industrial finish, 1/2" sq. drive

S6193 Head Bolt Socket
- Use on all 1981 and later *Toyota* and *Nissan* cars and pickups and 1976 and later *Honda* vehicles and other import and US cars with 10 mm head bolts
- Additional uses include drive shaft universal joint attaching bolts for *Ford* vehicles
- 4 1/2" length reaches past cam and rocker assembly to service head bolts
- Thin-profile socket and shank will reach through the access hole and past overhead camshaft
- 12-point, industrial finish, 1/2" drive

S6195 Head Bolt Socket
- Same as S6193 except for 14 mm head bolts

S6214 Head Bolt Socket
- Remove and install headbolts on 1995 and later Subaru® vehicles
- Length of socket allows the removal and installation of headbolts with engine in the car
- 54.1 mm length. 14 mm size. 1/2" drive. 12-point

YA6611 Head Handler *(Blue-Point)*
- Convenient and balanced T-handle design helps move cylinder heads faster and easier
- No need to “bear hug” the cylinder head during movement
- Attached floating washer for increased surface contact
- Comfortable, secure gripping surfaces for hands
- M6 x 1.0 threads
- Package of two

YA6612 Head Handler *(Blue-Point)*
- Same as YA6611 except has 1/4" x 20 threads
- Package of two

YA6613 Head Handler *(Blue-Point)*
- Same as YA6611 except has M8 x 1.25 threads
- Package of two

FRT12 Three-Valve Insert Kit for *Ford* Vehicles *(Blue-Point)*
- Repair cylinders without removing the head
- Custom guide, tap and drill for quick and simple repair of damaged threads
- Unique insert installer makes the job quick and easy
- Works on three-valve 5.4 L and 6.8 L engines built before 10/9/2007
- Also works on three-valve 4.6 L engines built before 11/30/2007 found on many 2004–2008 *Ford*, *Lincoln* and *Mercury* vehicles
- Set includes Tap, Core Drill, Guide, Insert Installer, Insert and Storage Case

S6192A

CJ147A

ADT30KT

CJ113B

CJ117C

YA1350

Power Steering/Alternator/Water Pump

S6192A Water Pump Socket
- 1/2" square drive socket features dovetail design to deliver positive engagement when applying high torque
- Black industrial finish

Applications: 1992–1998 Cadillac® Northstar® 4.6 L V8; 1997–1998 Oldsmobile® Aurora 4.0 L

S6192A-1 Water Pump Socket Stabilizing Strap
- Bolts on water pump to secure S6192A water pump socket in place during water pump removal and replacement
- Includes two M6 x 12 bolts for securing strap to water pump
- Black industrial finish

Applications: 1992–1998 *Cadillac Northstar* 4.6 L V8; 1997–1998 *Oldsmobile* Aurora 4.0 L

CJ113B Power Steering/Alternator Pulley Installer
Designed for US vehicles. 1" pulley driver hex, 7/16" pressure screw hex, thread size of 5/8"-18UNF-2A (puller end), 3/8" 16UNC-2A (shaft end). 4 5/8" long.

CJ113C4 Pulley Installer Shaft
- Thread size of 5/8"-18UNF (puller end), 3/8"-16UNC (alternator end)

CJ117C Power Steering and Alternator Pulley Puller
Includes short adaptor to remove small flange-type pulley; use long adaptor on GM® 200/Platform vehicles. Can also remove Chrysler® alternator pulleys that have double grooves (Replace pulleys with CJ113B Installer). Long adaptor included to handle pulleys on *GM* minivans. Nickel/chrome finish, industrial finish screw. Designed for most US vehicles (replace pulley with CJ122 sets).

CJ122 Power Steering Pulley Installer Set
Includes CJ113B Installer and CJ113C4 Pulley Installer Shaft. Thread size of 5/8"-18UNF-2A (puller end), 3/8" 16UNC-2A (shaft end).

CJ124A Power Steering/Alternator Pulley Puller
This is a larger version of CJ117C. Designed for *Chrysler*, Ford® and earlier *GM* vehicles.

CJ147A Power Steering Gear Lower Pinion Bearing Puller
- Required tool to comply with *GM R*ecall Bulletins #02049 and #03062 regarding power steering gear lower pinion bearing separation

ADT30KT Alternator Pulley Kit
- Aids installation and removal of Alternator Decoupler Pulleys either OWC (one way clutch) or OAD (Overrunning Alternator Decoupler)
- Varying lengths of hex, Torx® and spline configurations allow user to handle unique combinations for a difficult task
- Master kit eliminates the need to shop around for hard-to-find tools and reduces service bay downtime that can erode a technician's profit
- One Way Clutch (OWC) Pulleys and Overrunning Alternator Decoupler (OAD) Pulleys exist on over 20 million cars and growing
- Tool can be used on all major ADP Manufacturers including INA®, Gates® and Litens®
- The most comprehensive kit on the market
- Features a combination of hex bits, *Torx* bits, spline sockets, and specialty bits to work in conjunction to remove pulleys from alternator
- Drop forged and precision CNC components to meet the tight tolerances of the application

Applications include: Audi®, BMW®, Buick®, *Cadillac*, Chevrolet®, *Chrysler*, Citroen®, Dodge®, Fiat®, Ford®, Honda®, Lexus®, Mercury®, Opal®, Pontiac®, Peugeot®, Porsche®, Renault®, Saturn®, Seat®, Scion®, Toyota® and VW® vehicles

YA1350 *Toyota* Water Pump Pulley Wrench (Blue-Point®)
- Essential tool for preventing pulley damage when removing or installing bolts
- Fixed pin dimension for quick, easy installation
- Unique bend to clear engine compartment obstacles
- Wrench head shaped for generous clearance around the bolts

⚠WARNING
- Do not use chrome or industrial finish hand tools with impact drivers
- Read safety precautions on pages W1 to W4

ENGINE SERVICE: SERVICE TOOLS

SRD6

SBT26


YA9417

SBTL33

YA9350B

YA9340

GA424A

Belt Tensioning Tools (Blue-Point®)

SRD6 Belt Tensioner Release Tool
- 6" long adaptor with 1/2" male square
- The female triple square drive allows the user more flexibility to work around obstacles by coming in at different angles with a 1/2" breaker bar
- Similar to Snap-on® 6" torque adaptors but with a male square
- If using with a torque wrench, please refer to *Snap-on* part # SS306G Torque Chart for formula to obtain the correct applied torque

Heavy Duty Applications:
- For serpentine belt tensioners with a 1/2" square drive opening found on Series 60 Detroit Diesel® and Caterpillar® engines
- Other heavy duty applications include buses and delivery vans where the doghouse or engine shrouding can get in the way and make the work area very tight

Automotive Applications:
- 1/2" serpentine belt tensioners on Dodge®/Chrysler® vehicles (2.0 L and 3.0 L engines), Ford® vehicles, Lincoln® and Mercury® vehicles (2.3 L, 3.0 L, 4.2 L and 4.6 L engines), GM® vehicles (2.5 L, 4.7 L, 5.0 L and 5.7 L engines)

SBT26 Serpentine Belt Tool
- Works on all serpentine belts
- Clamping jaw allows user to position serpentine belt without the belt slipping out of the tool
- Positive grip allows belt routing in tight access areas
- Ergonomic handle provides comfort and ease in use
- Lightweight steel body for durability and strength

YA9417 Belt Tensioning Tool
- General use belt tool for installation and removal of V-belts and timing belts
- Two-pin design and long length allow user to push and pull belts as needed for access in restricted areas

SBTL33 Serpentine Belt Tool
- Flexibility allows for easy adjustment of belt around various pulley positions
- LED lighted portion of tool ensures easy visibility in dark engine compartments
- Extra long 33" length allows for deeper reach around crank shaft pulley
- Reverse gripping feature allows for two-handed positioning of tool

YA9350B Ratcheting Belt Tensioning Wrench Set
- Allows direct access to belt tensioners without removing engine accessories or frame components
- Covers almost 90% of all vehicles equipped with spring-loaded serpentine belt tensioners
- Includes YA9350B1 wrench (15 mm) and YA9350-2 to YA9350-9 adaptors
- All adaptors feature a 15 mm external hex drive for use with the YA9350B1 wrench

Applications: *Chrysler* (*Dodge* and Plymouth®), *Ford* (*Lincoln* and *Mercury*), *GM*, Isuzu®, Jeep®, Lexus®, Mazda®, Mitsubishi®, Saturn®, Toyota®, VW® vehicles

YA9350B1 Belt Tensioning Wrench
15 mm single hex.

YA9350-2 Adaptor
14 mm single hex. 15 mm external hex drive

YA9350-3 Adaptor
3/8" square drive. 15 mm external hex drive

YA9350-4 Adaptor
3/8" square drive. 15 mm external hex drive

YA9350-5 Adaptor
1/2" square drive. 15 mm external hex drive

YA9350-6 Adaptor
13 mm single hex. 15 mm external hex drive

YA9350-7 Adaptor
16 mm single hex. 15 mm external hex drive

YA9350-8 Adaptor
15 mm single hex. 15 mm external hex drive

YA9350-9 Adaptor
19 mm single hex. 15 mm external hex drive

YA9340 Serpentine Belt Wrench
- Use to release any serpentine belt tensioner with 1/2" square drive opening
- Ratcheting action allows better positioning of the tool, which allows more swing angle than a solid-type serpentine belt wrench
- Reversible ratchet head is only 1" thick so it will fit between tensioner face and fan blades on S Series 60 *Detroit Diesel* and some *Caterpillar* engines
- Also great for working on buses and delivery vans where the doghouse or engine shrouding restrict access
- Compact overall length keeps handle from coming in contact with radiator hoses, charged air cooler pipes, hydraulic lines or frame rails
- Vinyl grip for comfort
- 13" overall length

GA424A Belt Tension Gauge
- Range is 30 lb–180 lb (130–800 N•m)
- Squeeze handle, place gauge on drive belt, release handle and read

Belt Tensioning Tools (Blue-Point®)

SBT60 Serpentine Belt Tensioner Wrench
- Saves time by reducing the number of parts removed to change belts
- Double ended to fit more models
- Extra-long for more leverage

SBT60

SBT12 GM® Ecotec® Serpentine Belt Tensioner Wrench
- Designed to ease service of serpentine belt on *Ecotec* 2.2 L and 2.4 L in-line 4 cylinder engines in *GM* vehicles
- Service serpentine belt without removal of engine mount or lower air filter housing
- Allows access to tensioner from top of engine compartment
- Double square drive gives improved leverage and flexibility
- Low profile fits into space between tensioner and frame rail

SBT12

SBIT1 Stretch Belt Tool
- Allows belt to be rotated onto pulley without twisting the belt, which can cause damage to the belt
- Low profile to allow for tight access applications
- Groove on underside of tab fits on outer lip of pulley to prevent tool from slipping off the pulley

Applications:
2007–2009 Ford®/Lincoln® (Edge, MKZ/MKX) 3.5 L used on water pump. 2009 Chevrolet®/GMC®/Cadillac® (Express, Silverado®, Tahoe®, Suburban®, Colorado®, Avalanche®, Sierra, Savana, Yukon®, Canyon®, Escalade®) 4.8 L, 5.3 L , 6.0 L, 6.2 L used on air conditioner compressor. 2008–2009 Hummer® (H3, H3T, H2) 5.3 L and 6.2 L used on air conditioning compressor.

SBIT1

SBIT2 Stretch Belt Tool
- Easily install stretch belts on late model European vehicles
- Allows belt to be rotated onto pulley without twisting the belt and causing damage
- Low profile to allow for tight access applications
- Groove on underside of tab fits on outer lip of pulley to prevent tool from slipping off the pulley

Applications:
BMW®: Models 118, 120, 318, 320, 325, 330, 335, 520, 525, 530, 535, 635, 730, X3® and X5®; Volvo® vehicles: Models C30, S40 and V50; Mercedes®: 3.0 L Diesel Engines

SBIT2

SBT2KT Stretch Fit Belt Kit
- Universal installation and removal of all stretch belts
- Easy to use process for both removal and installation
- Allows removal and reuse of stretch fit belts
- Includes SBTI Install Tool, SBTR Removal Tool and informative instructional DVD

SBTI Stretch Fit Belt Install Tool

SBTR Stretch Fit Belt Removal Tool

SBT2KT

⚠WARNING
- Do not use "cheater bars" on handles
- Read safety precautions on pages W1 to W4

ENGINE SERVICE: SERVICE TOOLS

YA188G

YA188LR

YA188MKT

Harmonic Balancer (Blue-Point®)

YA188G Harmonic Balancer Installer
- Includes seven adaptors for use on a wide range of engines
- Adaptor sizes: 7/16"-20, 1/2"-20, 9/16"-18, 3/4"-16, M12 x 1.5, M14 x 1.5 and M16 x 2.0

YA188LR Long-Reach Harmonic Balancer Installer
- Traditional harmonic balancer installers cannot be used to install the harmonic balancers on V8s and V6s for late model GM®, Ford®, Chrysler® and Dodge® vehicles
- Kit includes tools for all three US vehicle makers
- Reduce the risk of stripping threads inside the crank
- Reduce the risk of breaking crank bolts
- Kit includes YA188LR-1 thru–YA188LR-5

YA188LR-1 Center Screw (M16 x 2.0)
- Use on *GM* 4.8 L, 5.3 L, 5.7 L, 6.0 L and 7.0 L engines (2008–2012 model years)

YA188LR-2 Center Screw (M12 x 1.5)
- Use on *Ford* 3.0 L, 3.5 L, 4.6 L, 5.4 L and 6.8 L engines (2004–2012 model years)

YA188LR-3 Center Screw (M14 x 1.5)
- Use on *Chrysler*/*Dodge* 4.7 L, 5.7 L and 6.1 L V8 engines (2006–2012 model years)

YA188LR-4 Pressed Bearing and Nut

YA188LR-5 Center Screw (M12 x 1.75)
- Use on *Chrysler*/*Dodge* 3.7 L V6 engines (2006–2012 model years)

YA188MKT Master Harmonic Balancer Installer Kit
- Includes traditional installer adapters as well as long-reach adapters for late model applications
- Services harmonic balancers as well as underdrive pulleys and recessed crank threads on *Dodge* Hemi®, *GM* Gen III/IV and *Ford* 4.6 L and 5.4 L modular engines
- Works on most European vehicles including BMW® and VW® as well as Toyota®, Honda®, Kia® and Hyundai® vehicles

CJ146

YA6490A

YA6010A

HIW3A

CJ146 Harmonic Damper Pulley Puller
- Remove the crankshaft harmonic balancer on 1990 and later 3.3 L and 3.8 L *GM* engines
- Shoulder bolt adaptors provide correct installation depth, preventing damage to the crank sensor and interrupter rings
- Includes three CJ146-1 adaptors and one CJ146-2 extension plus vinyl storage pouch; requires Snap-on® CJ98-1 yoke and CJ83-3 pressure screw for use (not included)

YA6470 Harmonic Dampener Pulley Holding Tool
- Harmonic dampener pulley holding tool for *GM* trucks and SUVs
- Easily removes and installs the bolt holding the pulley
- Industrial black finish helps protect against corrosion

Applications: 1999 and later GEN III 4.6 L, 5.3 L and 6.0 L V8 engines

YA13350 Harmonic Dampener Pulley Puller
- Use on 3.6 L Camaro® engines
- Unique design accesses pulley on internal pulley ledges

YA13450 Harmonic Dampener Pulley Puller
- Use on 3.5 L and 5.7 L *Dodge* engines
- Unique design accesses pulley on internal pulley ledges

YA6490A Harmonic Damper Pulley Puller
- New spring-loaded legs allow for leg position retention
- Provides greater ease and control when installing the puller in confined areas
- Removes harmonic damper pulleys found on many *Chrysler* and *GM* engines
- Used on autos, pickups, SUVs and vans

YA6491A Harmonic Damper Pulley Puller Update Kit
- Updates earlier YA9740 pullers to the same applications as the new YA6490A
- Kit updates other pulley pullers that are similar to the YA9740 series of pullers
- Add YA6491 Update Kit to existing YA9740 series pullers to add these new applications: *GM*: 4.2 L straight 6 cylinder: Chevy® Trailblazer®, GMC® Envoy®, Oldsmobile® Bravada® (2003 and later), Buick® Rainier (2004 and later), 3.5 L Straight 5 cylinder: *Chevy* Colorado®, *GMC* Canyon® (2004 and later), Hummer® H3® (2006 and later), 2.8 L straight 4 cylinder: *Chevy Colorado*, *GMC Canyon* (2005 and later)

YA6010A Harmonic Dampener Pulley Holding Tool *(Blue-Point)*
- Saves time during removal and installation of the crank bolt on most engines in *Honda* and Acura® vehicles. Verify exact model year/engine size coverage with tool instructions
- When used with a 1/2" drive breaker bar or ratchet, prevents the pulley from rotating when removing/installing the pulley bolt

HIW3A Hand Impact Wrench *(Blue-Point)*
- Remove/replace harmonic balancer pulleys without removing the radiator
- Accesses restricted areas where an air impact wrench will not fit or when air supply is unavailable
- Use with any 1/2" impact socket
- Molded rubber hand guard
- Max torque: 600 ft-lb
- Overall length: 22 1/16"

Specialty Tools (Blue-Point®)

YA7200 Ignition Module Wrench for Ford® Vehicles
- For 1982 and later *Ford* ignition modules
- Ratcheting ends are offset 25°
- One end has 7/32", 6-point; other end a T20 TORX® bit

YA8640 Cam Belt Wrench for VW®/Audi® Vehicles
- For adjusting camshaft spur belts that have idler pulleys with pin holes
- Vinyl handle grip

YA6760 Timing Belt Pulley Holder for *VW*/*Audi*
- Holds crank pulley stationary for crank bolt removal and installation to the factory torque requirement
- Three-bolt design for secure holding
- 1/2" drive for use with a breaker bar
- Heat-treated for strength with high quality black finish

Applications: 1.8 L 4 cylinder turbo: *VW* and *Audi* vehicles 1998–2006; 2.0 L 4 cylinder: *VW* vehicles 1993–2005; 2.0 L 4 cylinder turbo: *VW* and *Audi* vehicles 2006 and later

YA9870 Tension Pulley Spanner Wrench
- Easily adjust camshaft spur belts having idler pulleys with pin holes on Mitsubishi®, Plymouth® and Eagle® vehicles
- Protruding pins on the wrench grip the center of the idler pulley and rotate it around its off center retaining bolt
- Rotation allows for the camshaft spur belt tension adjustment
- Designed for use on: 1990–1993 *Mitsubishi* Eclipse®, *Eagle* Talon and *Plymouth* Laser 2.0 L DOHC (non-turbo); 1990–1993 *Plymouth* Laser 2.0 L DOHC (turbo); 1990 and later *Mitsubishi Eclipse* and *Eagle* Talon 2.0 L DOHC (turbo); 1994–1996 *Mitsubishi* Montero® 3.5 L DOHC; 1994 and later *Mitsubishi Montero* 3.5 L SOHC; 1994 and later *Mitsubishi* Galant® 2.4 L SOHC; and 1994 and later *Mitsubishi* Mirage™ 1.8 L SOHC vehicles

YA4590A Hood Prop
- Three-piece telescoping shaft locks in any position
- Range is 20"–48 1/2"
- Will work on front or sides of any car or truck
- Made of steel tubing and features locking levers on each section
- Includes holding support to prevent slippage

YA45904 Hood Prop Adaptor

YA65500 Cam Seal Remover
- Special tool speeds camshaft seal removal on most V6 engines in Toyota® and Lexus® vehicles
- Unique press-and-pull cup design eliminates the difficult pick method
- Use on *Toyota* 3.0 L and 3.3 L V6 (1996 and later) and *Lexus* 3.0 L and 3.3 L V6 (1990 and later) vehicles
- Kit includes cup, press rod, washer, nut and large stud
- Heat-treated alloy steel

YA6551 Cam Seal Remover/Installer
- Kit provides accurate and fast camshaft seal removal and installation on *Toyota* (1996 and later) and *Lexus* (1990 and later) 3.0 L and 3.3 L V6 engines
- Eliminates possibility of camshaft damage
- Heat-treated alloy steel and high quality hardware
- Includes removal cup, press rod, washer, nut and large stud

YA7960 Camshaft Seal Kit
- Easily removes and installs camshaft and crankshaft seals without damage
- Compact puller with unique extracting hooks engage seal for quick removal
- Interchangeable sleeves and mandrels allow easy installation of new seal
- Suits seals from 21.5 mm–64 mm

YA7200

YA8640

YA6760

YA9870

YA4590A

YA65500

YA6551

YA7960

WARNING • Read safety precautions on pages W1 to W4

ENGINE SERVICE: SERVICE TOOLS

S9842A

Thermal Vacuum Switch

S9842A Thermal Vacuum Switch Socket
- For US vehicles through 1988
- 7/8", 6-point wrench opening, 1/2" drive
- 3 1/8" long

S6158

Turning/Moving

S6158 Engine Barring Socket
- Use 4 L–6.6 L small block V8s in Chevrolet® vehicles
- Designed to turn the engine over when it is on engine stand
- 1/2" drive

SPS2

Seal Puller

SPS2 Universal Seal-Puller Set
- Small seal puller used for common seal sizes and large seal puller used for larger seal sizes
- 2" and 4" pins for various seal diameter sizes with clearance requirements
- Surface area on hook helps prevent seal puller from piercing through the seal (0.25" where competitive units are smaller at 0.12")
- Pin creates a pivot point on the surface of the seal, thus distributing the force evenly over a larger surface area when compared to a traditional seal puller design

VALVE: SERVICE TOOLS

S6132A

Cover Bolt Socket

S6132A Metric Valve Cover Bolt Socket
- For GM® vehicles, 1976 and later Honda® vehicles and other import and US vehicles
- 10 mm, 12-point wrench size
- Allows access to head bolts, valve and rocker covers and oil pan bolts
- Deep clearance for bolts with extended tip as used on spark plug wire harness
- 3/8" drive; 11/16" O.D.
- 4 1/8" long

YA8825

Valve Adjustment Tools (Blue-Point®)

Valve adjusting tools for current VW® vehicles. These two tools are designed to be used together on all late models requiring the *VW* #2078 tool, which includes all current 5 cylinder *VW*s and Audi® 5000.

YA8825 Valve-Adjusting Tool
- For Toyota® and other overhead camshaft engines using spacer shims
- Shim pliers push between the shim and camshaft, allowing the included YA8825-1 wedge tool to be placed between the valve lifter ledge and camshaft for easy shim replacement

YA8825-1 Wedge Tool
- Wedge tool to be placed between the valve lifter ledge and camshaft for easy shim replacement

YA8895

Metric Jam Nut Type Adjustment Tools *(Blue-Point)*

Include an idle adjustment screwdriver within a socket and handle for holding adjustment screw in place while the jam nut is tightened. Handle pivots from one side to the other so the socket “window” is always visible.

YA8895 Valve Adjustment Tool
- For all cars with 10 mm jam nut valve screws

YA8880 Valve Adjustment Tool
- For all cars with 12 mm jam nut valve screws

Valve Keeper Tools (Blue-Point®)

GA318A Overhead Valve Tool
- Removes and replaces valve keepers on all gas and diesel overhead valve engines, even VW® Rabbit®, motorcycle, marine and aircraft engines
- Magnetically retains keepers and will not bend valve stems
- Use in place of c-clamp or other type of compressor
- Use only with a soft-faced hammer

GA318A

GA317 Metric Valve Keeper Remover/Installer
- Quickly removes and installs valve keepers on most overhead cam engines with valve stems from 4.5 mm–7.5 mm
- Push or tap tool with hammer to remove valve keepers
- Magnet in tool body captures keepers for quick removal and valve disassembly
- To install keepers, load keepers then push or tap to install
- Used on vehicle or on workbench

GA317

Camshaft/Crankshaft Tools *(Blue-Point)*

GA285 Camshaft Bearing Remover and Inserter Set
- Removes and inserts bearings in all engines
- Five driving plugs handle a range of 1.475"–2.690"
- Fits slightly undersized or oversized bearings
- Sturdy storage box

GA285

YA6380 Camshaft Seal Installer Set
- Quickly and easily install the crankshaft seal on most 4 cylinder and V6 engines that have 10 mm and 12 mm x 1.25 cam bolts

YA6380

General Service *(Blue-Point)*

YA8230 Valve Stem Seal Pliers
- Removes valve stem seals from overhead camshaft engines including four valve-per-cylinder engines that have restricted access to the valve stem seal
- Gripping serrations in the pliers tip easily grab both OEM and aftermarket seals with ease
- Easy-grip handles

YA8230

VL2 Valve Holder
5/8" and 13/16" diameter suction cups.

VL3 Valve Holder
1 1/8" and 1 3/8" diameter suction cups.

VL2

YA6290 Valve Stem Seal Pliers
- Use in restricted areas with a clearance problem above the cylinder head
- Pliers head rotates from 0°–90°
- Jaw tip features a thin edge for hooking under stubborn valve stem seals
- Four vertical ridges on jaws aid in holding the valve stem seal
- Vinyl handle grips for comfort and control

YA6290

VALVE GUIDE SERVICE TOOLS

Valve Guide Brushes *(Blue-Point)*

- Brush wire is woven into twisted wire strands
- Each features a fluted, wooden handle

AC10B Valve Guide Brush
5/16" diameter brush.

AC11B Valve Guide Brush
11/32" diameter brush.

AC12B Valve Guide Brush
3/8" diameter brush.



AC10B

Metric Valve Guide Removers

- Designed for use with Snap-on® air hammers
- Can also be used as drift punches

PHG97A Valve Guide Remover
5 mm pilot. 189 mm long.

PHG96A Valve Guide Remover
7 mm pilot. 189 mm long.

PHG83A Valve Guide Remover
8 mm pilot. 190 mm long.

PHG86A Valve Guide Remover
9 mm pilot. 190 mm long.

PHG83A

WARNING • Read safety precautions on pages W1 to W4

VALVE: SERVICE TOOLS

CF811B

CF19B

CF700C

Valve Lifters (Blue-Point®)

CF811B C-Clamp Compressor
- 1"–2" capacity. For "L" head, valve in head, high compression engines and vehicles with overhead valves
- Activating mechanism prevents cocking of valve spring as it is compressed

CF19B C-Clamp Compressor
- Compact model includes CF19-3A jaws for 1/4"–1 1/16" diameter springs on small, air-cooled engines and CF19A5 jaws for both 17 mm and 20.8 mm diameter springs on Honda® engines

CF700C Valve Spring Compressor
- 7/8"–2 1/2" capacity. Operates on 90–150 PSI, but develops up to 3x output pressure. Tool measures 1" x 8"

CF700-2 Replacement Jaw Set
- Medium, offset jaws with 1"–2" capacity
- For CF811B and CF700C

CF700C-1 Optional Jaw Set
- For CF811B and CF700C
- Large, straight jaws with 1 1/2"–2 1/2" capacity

YA9140B

YA3271

VST100

Valve Spring Compressors *(Blue-Point)*

YA9140B Universal Valve Spring Compressor
- Removes/installs the valve spring without removal of the cylinder head from the engine
- US and import servicing of single and double overhead cam engines, including Audi®, Chrysler®, Infiniti®, *Honda*, Hyundai®, Lexus®, Mazda®, Mitsubishi®, Nissan®, Porsche®, Saturn®, Toyota®, Volvo® and VW® vehicles

YA3271 Valve Spring Compressor
- For most cars and trucks with overhead valves
- Works with cylinder head on or off the engine
- Removable hand wheel provides option to use 5/8" socket or wrench in confined quarters

VST100 Cam Operated Valve Spring Compressor
- Eliminates the need for cylinder removal and the need to readjust tool to each spring
- Works on most overhead valve engines

CG90

Valve Spring Depressor

CG90 Valve Spring Depressor
- Self-leveling action compensates for any helix angle spring
- Jaw length can be adjusted
- Pulls with equal pressure on both

Valve Spring Replacement Tools

M2112PK Timing Chain Holder For Lexus® vehicles (2 pk)
- *Lexus* V6 Valve Spring Replacement Tool
- For *Lexus* safety recall ALE
- M2112PK includes two M2112s as two are required to hold timing chain

Application:
M2112PK holds timing chain during valve spring replacement or any other service requiring camshaft removal. Saves technician time as the engine can be turned over with the cam shaft out and with the timing chain installed.

M2113 For VVT Gear Holder *Lexus* Vehicles
- *Lexus* V8 Valve Spring Replacement Tool
- For *Lexus* engine designation 1 UR-FSE 4.6 L V8
- For *Lexus* safety recall ALE

Application:
M2113 holds the intake VVT gear during valve spring replacement. Saves technician time as the engine can be turned over with the cam shaft out and with the VVT gear in and timing chain installed. M2113 can be used instead of using wire ties.

M2112PK

M2113

Ridge Reamer (Blue-Point®)

WR30A Ridge Reamer
- Lathe type reamer is for 3"–5" diameter cylinders
- Centers itself in cylinder

WR30A10 Replacement Cutter Bit

WR30A

Cylinder Bore

GA3627 Cylinder Bore Gauge
- Measure cylinder wear without removing pistons
- Check cylinder diameter when used with micrometer
- Range is 2.6"–7" in .001" increments and measures to a bore depth of 8"
- Includes gauge, six extensions (0.2", 0.4", 0.6", 0.8", 1.0" and 2.0") plus storage case

GA3627

Ring Expanders

PRS8 Piston Ring Expander
- Installs piston rings from 3/64"–1/4" thick
- Eliminates breakage or distortion of rings
- 7" long

PRS10 Piston Ring Expander
- 2 3/4"–4 1/4" ring capacity
- Remove or install both step cut and diagonal cut rings
- Spring tension eliminates the need for adjustment

PRS12 Piston Ring Expander
- Similar to PRS10 but with 4 1/2"–7" ring capacity
- Excellent for heavy duty diesel applications

PRS8

PRS10

WARNING • Read safety precautions on pages W1 to W4

PISTON: SERVICE TOOLS

RC150A

RC40C

RCL30

RCW60

RC980

RC500

RC510A

HLE24

Ring Compressors

Clutch control holds tension band in position as piston is inserted into cylinder. 1/2" wide spring bands equalize tension over belt width so ring assembly may be compressed into groove until flush with piston. “V” beads on lower edge of belt keep tool from entering cylinder. RC40C can be used upside down for Chevrolet®, Mercury® and Ford® trucks with angled blocks.

RC150A Ring Compressor
- Four band
- 3 1/2"–7" capacity, 7" deep

RC50C Ring Compressor
- Two band
- 3 1/2"–7" capacity, 3 1/2" deep

RC40C Ring Compressor
- Two band
- 2 1/8"–5" capacity, 3 1/2" deep

RCL30 Ring Compressor
- One band
- 2 1/2"–5" capacity
- May be disassembled and removed from around connecting rod when used on small aircraft, motorcycle or other engines that require the cylinder to be pushed over the piston during assembly

RCW60 Ring Compressor
- One band
- 3"–5" capacity, 1 1/2" deep
- Low-friction wrinkle band construction with thumbscrew for precise adjustment
- Used on small aircraft and motorcycle engines where cylinders are pushed over piston during assembly

RC980 Ring Compressor Set
- Works both horizontally and vertically with pliers grip handle
- Fine tooth ratcheting mechanism
- Includes six hardened steel bands: 2 7/8"–3 1/8", 3 1/8"–3 3/8", 3 3/8"–3 5/8", 3 5/8"–3 7/8", 3 7/8"–4 1/8" and 4 1/8"–4 3/8"

RC980-7 Optional Band 4 1/2"–4 3/4" capacity
RC980-8 Optional Band 4 3/4"–5" capacity
RC980-9 Optional Band 5"–5 1/4" capacity
RC980-9.5 Optional Band 5 1/4"–5 1/2" capacity
RC980-10 Optional Band 5 1/2"–5 3/4" capacity
RC980-11 Replacement Pliers

Ring Groove Cleaners

RC500 Piston Ring Groove Cleaner
For pistons with grooves of 5/64", 3/32", 1/8", 5/32" and 3/16" with diameters from 2 1/2"–5".

RC500-1 Replacement Cutter Blade
Replacement cutter blade.

RC500-11 Optional Cutter Blade
For 1/8", 1/4", 5/16", 2.5 mm and 3 mm grooves.

RC510A Piston Ring Groove Cleaner
For pistons with grooves of 5/64", 3/32", 1/8", 5/32" and 3/16" with diameters from 1"–5".

RC510-1 Replacement Cutter Wheel
RC510-6 Replacement Knurled Nut
RC510-3 Adaptor
Adapts RC510A for use on pistons with diameters of 1–2 3/4".
RC510-7M Replacement Metric Cutter Wheel

Dead Blow Hammer

HLE24 Piston Dead Blow Hammer
Made of material that will not damage the piston. Shot-filled head drastically reduces rebound. Head length is 7 3/4". Diameter is 1 1/4"–1 1/2" with a reach of 5 1/2" to the handle shoulder. Overall length is 12 3/4".

A57Q

A57Q Bushing Remover/Inserter Set

- For standard and specialized bronze, steel, rubber or Enlox bushings
- Range of adaptor sizes covers nearly all shackle and steering bushings
- New bushings are inserted by tightening screw, which forces the bushing into place without hammering
- Sleeve permits forcing out of old bushings
- Useful where limited space prevents driving them out
- Five smallest adaptors are used only with the smallest driver

Stock No.	Description
A57CA	Screw (1/2"-20)
A57-35	Screw (5/8"-18)
ME4A2	Nut (1/2"-20)
ME4A4	Nut (5/8"-18)
A57-3	Washer (1/2" ID, 1 1/4" OD)
A57-37	Sleeve Adaptor (.500" ID x .625" OD)
A57-39	Sleeve Adaptor (.640" ID x 2.047" OD)
A57-41	Sleeve Adaptor (1.000" ID x 2.047" OD)
A57-38	Sleeve Adaptor (1.500" ID x 2.047" OD)
ESD1428	Bearing (1/2" ID, 1" OD)
ME11A1	Bearing (5/8" ID, 1 1/8" OD)
A57-36	Sleeve (4 15/16" long, 2 1/16" ID)
A57-27	Puller (1/8"-27 taper thread)

Stock No.	Dimension, inches O.D.	Dimension, inches Small O.D.	Dimension, inches Large I.D.	Dimension, inches Large O.D.
A57-15	Bushing Driver for Adaptors A57-16–A57-26			
A57-16	.339	.434	—	—
A57-17	.430	.497	—	—
A57-26	.492	.622	—	—
A57-18	—	.493	—	.559
A57-25	—	.554	—	.684
A57-14A	Bushing Driver for Adaptors A57-8–A57-20			
A57-8	.555	.622	—	—
A57-19	.601	.668	—	—
A57-7	.618	.747	—	—
A57-6	.678	.809	—	—
A57-5	.728	.856	—	—
A57-24	.742	.997	—	—
A57-10	.789	.918	—	—
A57-11	—	.851	—	.980
A57-22	—	.907	—	1.046
A57-12A	—	.919	—	1.027
A57A13	—	.993	—	1.122
A57-46	—	1.034	—	1.136
A57-20	—	1.055	—	1.184
A57-23A	—	1.101	—	1.230
A57-45	—	1.250	1.125	—
A57-42	—	1.406	1.187	—
A57-48	1.206	1.500	—	—
A57-29	1.222	1.372	—	—
A57-40	1.367	1.625	—	—
A57-44	—	1.812	1.375	—
A57-43	—	—	1.625	2.000
A57-47	—	—	1.859	2.000
A57-49	—	—	—	13/16 opening
A57-51	—	—	—	17/32 opening
A57-50	—	—	—	1 3/8 opening

A57CA

ME4A2

A57-3

A57-37

ESD1428

A57-36

A57-27

A57-15

A57-16

A57-18

A57-14A

A57-8

A57-5

A57-11

A57-46

A57-20

A57-45

A57-42

A57-48

A57-44

A57-43

A57-49

A57-51

WARNING • Read safety precautions on pages W1 to W4

BUSHING/SEAL: DRIVER SETS

A261M

Metric Heavy Duty Bushing Driver Set

A261M Metric Bushing Driver Set

- Includes an extra large driver handle and adaptors in 40 mm–80 mm sizes
- Packaged in PB117 storage box

A261M Set Components

Stock No.	Description
A257-1	Large Driver Handle
A157-5	Driver Nut, 1/2"-20
A261M1	Adaptor (40–44 mm)
A261M2	Adaptor (42–45 mm)
A261M3	Adaptor (45–48 mm)
A261M4	Adaptor (48–52 mm)
A261M5	Adaptor (50–53 mm)
A261M6	Adaptor (55–60 mm)
A261M7	Adaptor (60–65 mm)
A261M8	Adaptor (65–70 mm)
A261M9	Adaptor (70–75 mm)
A261M10	Adaptor (75–80 mm)

A158B

Heavy Duty Bushing Driver Set

A158B Heavy Duty Bushing Driver Set

- Includes eight basic adaptors for servicing bushings on trucks, tractors and buses
- Adaptors are secured to threaded driver shaft by knurled nut
- Industrial finish
- Set comes packaged in PB34 storage box

A158B Set Components/Adaptors

Stock No.	I.D., inches	O.D., inches
A257-1	Large Driver Handle	—
A157-5	Driver Nut, 1/2"-20	—
A257-23	1 5/16	1 7/16
A257-24	1 3/8	1 1/2
A257-25	1 7/16	1 9/16
A257-26	1 1/2	1 5/8
A257-27	1 9/16	1 11/16
A257-28	1 5/8	1 3/4
A257-29	1 11/16	1 13/16
A257-30	1 3/4	1 7/8

A157C

Standard Bushing Driver Set

A157C Standard Bushing Driver Set

- Adaptors held on drivers with knurled nut
- Small and medium drivers (A157-3 and A157-2) fit all smaller bushings (A157-6–A157-12); large driver (A157-1) fits remaining bushings (A157-13–A157-22)
- Set comes packaged in PB20 storage box

A157C Set Components/Adaptors

Stock No.	I.D., inches	O.D., inches	Stock No.	I.D., inches	O.D., inches
A157-1	Large Driver Handle	—	A157-11	5/8	3/4
A157-2	Medium Driver Handle	—	A157-12	11/16	13/16
A157-3	Small Driver Handle	—	A157-13	3/4	7/8
A157-4	Driver Nut, 5/16"-24	—	A157-14	13/16	15/16
A157-5	Driver Nut, 1/2"-20	—	A157-15	7/8	1
A157-6	3/8	7/16	A157-16	15/16	1 1/16
A157-22	15/32	17/32	A157-17	1	1 1/8
A157-7	7/16	1/2	A157-18	1 1/16	1 3/16
A157-8	1/2	5/8	A157-19	1 1/8	1 1/4
A157-9	9/16	11/16	A157-20	1 3/16	1 5/16
A157-10	5/8	11/16	A157-21	1 1/4	1 3/8

A257

Complete Heavy Duty Bushing Driver Set

A257 Complete Heavy Duty Bushing Driver Set

- Complements the A157C set by adding 27 larger adaptors for transmission work as well as many other automotive and industrial applications
- Industrial finish
- Set is arranged in PB27 storage box

A257 Set Components/Adaptors

Stock No.	I.D., inches	O.D., inches	Stock No.	I.D., inches	O.D., inches
A257-1	Large Driver Handle	—	A257-36	2 1/8	2 1/4
A157-5	Driver Nut, 1/2"-20	—	A257-37	2 3/16	2 5/16
A257-23	1 5/16	1 7/16	A257-38	2 1/4	2 3/8
A257-24	1 3/8	1 1/2	A257-39	2 5/16	2 7/16
A257-25	1 7/16	1 9/16	A257-40	2 3/8	2 1/2
A257-26	1 1/2	1 5/8	A257-41	2 7/16	2 9/16
A257-27	1 9/16	1 11/16	A257-42	2 1/2	2 5/8
A257-28	1 5/8	1 3/4	A257-43	2 9/16	2 11/16
A257-29	1 11/16	1 13/16	A257-44	2 5/8	2 3/4
A257-30	1 3/4	1 7/8	A257-45	2 11/16	2 13/16
A257-31	1 13/16	1 15/16	A257-46	2 3/4	2 7/8
A257-32	1 7/8	2	A257-47	2 13/16	2 15/16
A257-33	1 15/16	2 1/16	A257-48	2 7/8	3
A257-34	2	2 1/8	A257-49	2 15/16	3 1/16
A257-35	2 1/16	2 3/16			

A160M

Standard Metric Bushing Driver Set

A160M Metric Bushing Driver Set

- Includes three driver handles and adaptors in 10 mm–42 mm sizes
- Packaged in PB118 storage box

A160M Set Components

Stock No.	Description	Stock No.	Description
A157-1	Large Driver Handle	A160M6	Adaptor (18–20 mm)
A157-2	Medium Driver Handle	A160M7	Adaptor (20–22 mm)
A157-3	Small Driver Handle	A160M8	Adaptor (22–24 mm)
A157-4	Driver Nut, 5/16"-24	A160M9	Adaptor (25–27 mm)
A157-5	Driver Nut, 1/2"-20	A160M10	Adaptor (28–30 mm)
A160M1	Adaptor (10–12 mm)	A160M11	Adaptor (30–34 mm)
A160M2	Adaptor (12–14 mm)	A160M12	Adaptor (32–36 mm)
A160M3	Adaptor (14–16 mm)	A160M13	Adaptor (35–40 mm)
A160M4	Adaptor (15–17 mm)	A160M14	Adaptor (38–42 mm)
A160M5	Adaptor (16–18 mm)		

A1310A

Bearing Race and Seal Driver Set

A1310A Bearing Race and Seal Driver Set (Blue-Point®)

- Collars fit most standard wheel bearing sizes
- Three largest sizes fit most late model four wheel drive vehicles

A1310A Set Components

Stock No.	Description
A1306-1	Handle (5 3/4" long)
A1306-2	Collar (1 9/16" long)
A1306-3	Collar (1 3/4" long)
A1306-4	Collar (1 31/32" long)
A1306-5	Collar (2 5/16" long)
A1306-6	Collar (2 17/32" long)
A1306-7	Collar (2 15/32" long)
A1310-1	Collar (2 27/32" long)
A1310-2	Collar (3" long)
A1310-3	Collar (3 3/16" long)

YA2480

YA2480 Seal Driver Set Components

Stock No.	Description	Stock No.	Description
A1306-1	Handle (5 3/4" long)	YA2480-8	Adaptor (#8)
A1306-1-1	Adaptor Mounting Bolt	YA2480-9	Adaptor (#9)
YA2480-17	Steel Backup Washer	YA2480-10	Adaptor (#10)
YA2480-1	Adaptor (#1)	YA2480-11	Adaptor (#11)
YA2480-2	Adaptor (#2)	YA2480-12	Adaptor (#12)
YA2480-3	Adaptor (#3)	YA2480-13	Adaptor (#13)
YA2480-4	Adaptor (#4)	YA2480-14	Adaptor (#14)
YA2480-5	Adaptor (#5)	YA2480-15	Adaptor (#15)
YA2480-6	Adaptor (#6)	YA2480-16	Adaptor (#16)
YA2480-7	Adaptor (#7)		

ASD1

Bearing Race and Seal Driver

ASD1 Universal Adjustable Bearing Race/Seal Driver

- Three-stepped jaws quickly adjust to accommodate bearing races and seals from 0.7"–3.39" (18 mm–86 mm) — eliminating the need for a driver and several different heads
- Step 1 jaw range: 0.7"–2.2" (18 mm–56 mm)
- Step 2 jaw range: 1.5"–3.0" (39 mm–77 mm)
- Step 3 jaw range: 1.89"–3.4" (48 mm–86 mm)
- Total depth/reach: 1.57" (40 mm)
- Can be used on US, Asian and European-built vehicles, including motorcycles
- Takes up less space in your tool storage than a typical bearing race/seal driver set
- Not included in A1310A Bearing Race and Seal Driver Set

WARNING • Read safety precautions on pages W1 to W4

COVERS

High density sponge rubber is laminated to vinyl, providing better protection and adherence to the fender.

JCKS6A

JCKS7A

JCK7DBL

JCK8

JCK15D

KAC1224TCA

Fender Covers

JCKS6A Fender Cover
- Measures 21" W x 30" L
- Raised ribbing along the center section provides tool holding space

JCKS7A Fender Cover
- Measures 22 1/2" W x 30" L
- For use on vehicles with broad fenders
- Raised ribbing along the center section provides tool holding space

JCK7DBL Fender Cover
- Measures 26" W x 36" L
- For use on shorter fenders of most new vehicles
- Raised ribbing

JCK7D Fender Cover
Same as JCK7DBL in red.

JCK8 Fender Cover
- Measures 26" W x 36" L
- Nonslip, non-absorbent surface conforms to the fender of any vehicle
- Easy to clean with soap and water

JCK15D Fender Cover
- Heavy duty vinyl material protects all surfaces
- Measures 29" W x 52" L

KAC1224TCA Motorcycle Gas Tank Cover
- Fits Harley-Davidson® Dyna, Softail® and Touring models
- Fits various models of Yamaha®, Victory®, Triumph® and Kawasaki® motorcycles plus many more
- Non-marring cover uses a non-abrasive inner liner that will not slide off

SEATCOVERBLU

SEATCOVERBLK

SEATCOVERRED

Seat Covers

- Universal fit for virtually all vehicles
- Reinforced expansion panels
- SAS technology = safety access system enabled
- Side airbag compatible
- Seat-lever compatible
- In-seat seat belt compatible
- Premium weight – 4 oz for durability and long life
- Water-resistant and machine washable

SEATCOVERBLU Snap-on® Racing Seat Cover (Blue)
SEATCOVERBLK *Snap-on* Racing Seat Cover (Black)
SEATCOVERRED *Snap-on* Racing Seat Cover (Red)

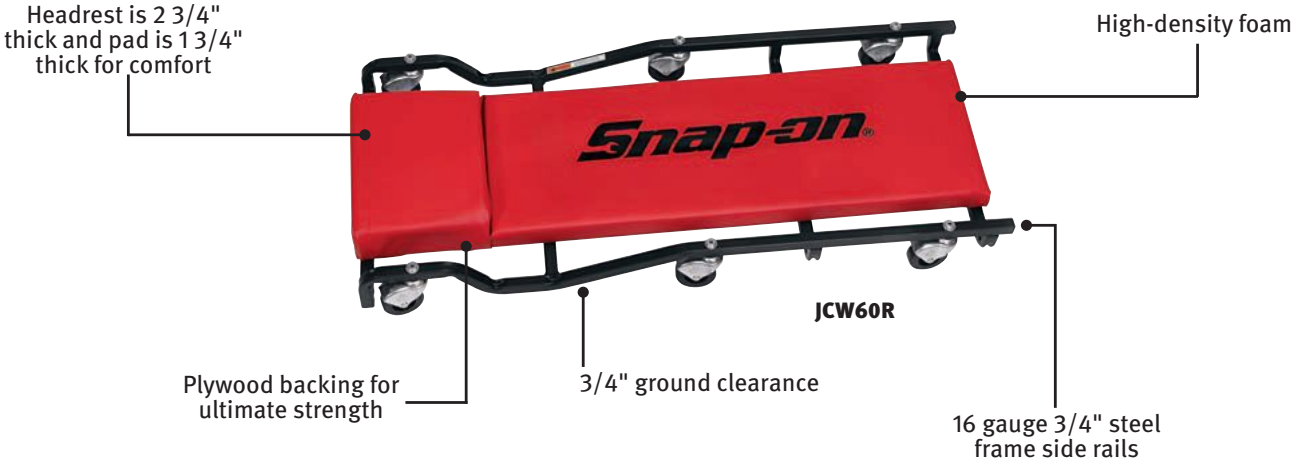

JCW60R

JCW60O

JCW60MAX4

JCW8A

Standard Creepers

Stock No.	Pad Color	Overall Size, inches	Pad Length	Pad Width	Number of Casters	Caster Diameter
JCW60BL	Black	40 L x 17 W x 4 H	39"	11"	6	2 1/2"
JCW60R	Red	40 L x 17 W x 4 H	39"	11"	6	2 1/2"
JCW60WLD	Orange	40 L x 17 W x 4 H	39"	11"	6	2 1/2"
JCW60O	Orange	40 L x 17 W x 4 H	39"	11"	6	2 1/2"
JCW60G	Green	40 L x 17 W x 4 H	39"	11"	6	2 1/2"
JCW60MAX4	Realtree® MAX-4®	40 L x 17 W x 4 H	39"	11"	6	2 1/2"
JCW8A*	Black	40 L x 17 W x 4 H	39"	11"	4	2 1/2"

*Blue-Point®

JCW65ABL

JCW65AR

JCW65AG

Adjustable Creepers

Stock No.	Pad Color	Overall Size, inches	Pad Length	Pad Width	Number of Casters	Caster Diameter
JCW65ABL	Black	40 L x 17 W x 4 H	39"	11"	6	2 1/2"
JCW65AR	Red	40 L x 17 W x 4 H	39"	11"	6	2 1/2"
JCW65AO	Orange	40 L x 17 W x 4 H	39"	11"	6	2 1/2"
JCW65AG	Green	40 L x 17 W x 4 H	39"	11"	6	2 1/2"
JCW65AMAX4	*Realtree MAX-4*	40 L x 17 W x 4 H	39"	11"	6	2 1/2"

⚠WARNING

- Do not stand on or use as a cart
- Read safety precautions on pages W1 to W4

CREEPERS

Heavy Duty Creepers

Stock No.	Pad Color	Overall Size, inches	Pad Length	Pad Width	Number of Casters	Caster Diameter
JCW70ABL	Black	40 L x 22 W x 5 3/4 H	39"	13"	4	4"
JCW70AR	Red	40 L x 22 W x 5 3/4 H	39"	13"	4	4"

JCW75ABL

JCW75AR

Heavy Duty Adjustable Creepers

Stock No.	Pad Color	Overall Size, inches	Pad Length	Pad Width	Number of Casters	Caster Diameter
JCW75ABL	Black	40 L x 22 W x 5 3/4 H	39"	13"	4	4"
JCW75AR	Red	40 L x 22 W x 5 3/4 H	39"	13"	4	4"

JCW45BL

JCPW40B

Specialty Creepers/Accessories

JCW45BL Black Premium Creeper

- Curved body supports for comfort and keeps creeper under you while maneuvering around
- Six inline roller casters have minimal contact with the ground, allow for quick directional changes and provide minimal rolling resistance
- Lightweight design is optimized for strength and has side and bottom handles to easily carry to the job
- Durable polyethylene material withstands shop chemicals and temperature extremes
- Reliefs on each side to allow for maximum arm clearance when working underneath vehicles
- Built to withstand the rigors of the professional shop environment
- 38" L x 17" W x 4" H

JCPW40B Padded Creeper

- 13" wide padded creeper with 6" all-rubber tires
- Provides a smooth ride over rough terrain
- Constructed from 1" 16 gauge steel tubing
- Overall dimensions: 39" L x 29" W x 9 1/2" H

JCW80R

JCW80O

JCW80MAX4

JCW85BL

Seat Creepers

Stock No.	Pad Color	Overall Size, inches	Seat Size, inches	Drawer Size, inches
JCW80BL	Black	14 1/4 L x 19 W x 15 H	10 L x 14 1/4 W	9 7/8 L x 11 1/2 W x 1 3/4 D
JCW80R	Red	14 1/4 L x 19 W x 15 H	10 L x 14 1/4 W	9 7/8 L x 11 1/2 W x 1 3/4 D
JCW80O	Orange	14 1/4 L x 19 W x 15 H	10 L x 14 1/4 W	9 7/8 L x 11 1/2 W x 1 3/4 D
JCW80G	Green	14 1/4 L x 19 W x 15 H	10 L x 14 1/4 W	9 7/8 L x 11 1/2 W x 1 3/4 D
JCW80MAX4	Realtree® MAX-4®	14 1/4 L x 19 W x 15 H	10 L x 14 1/4 W	9 7/8 L x 11 1/2 W x 1 3/4 D
JCW85BL*	Black	17 3/4 L x 15 W x 23 H	17 3/4 L x 10 W x 8 H	9 7/8 L x 11 1/2 W x 1 3/4 D
JCW85R*	Red	17 3/4 L x 15 W x 23 H	17 3/4 L x 10 W x 8 H	9 7/8 L x 11 1/2 W x 1 3/4 D

*Bucket seats

JCW90ABL

JCW95AR

Adjustable Seat Creepers

Stock No.	Overall Size, inches	Seat Size, inches	Adjustment Range
JCW90ABL	15 L x 15 W x 21 1/2 H	13 3/4 L x 13 3/4 W	14"–19 1/4"
JCW95ABL	17 3/4 L x 15 W x 28 1/4 H	17 3/4 L x 10 W x 8 H	14"–19 1/4"
JCW95AR	17 3/4 L x 15 W x 28 1/4 H	17 3/4 L x 10 W x 8 H	14"–19 1/4"

KRJC23AAPV

KRJC23AAPV Creeper Hanger
- Secures creepers to roll cabs
- Adjustable to four different creeper widths
- Two hook bolts and a lock rod are included
- 16 13/16" length
- Black textured finish

⚠WARNING

- Do not stand on or use as a cart
- Read safety precautions on pages W1 to W4

MEASURING: MICROMETERS AND SETS

MIC1B

MIC103B

Digital Micrometers, inches (Blue-Point®)

- Standard reading in .001" increments on digit display
- Vernier style reading in .0001" increments
- Large easy-to-handle insulated frame, carbide-tipped anvils, positive locking clamp and ratchet stop thimble

Stock No.	Range, inches	Increments, inches
MIC1B	0–1	0.01
MIC2B	1–2	0.01
MIC3B	2–3	0.01
MIC4B	3–4	0.01
MIC5B	4–5	0.01

MIC103B Fractional Set *(Blue-Point)*
MIC1B, MIC2B and MIC3B in fitted case with standards.

MIC3-4E

MIC0-3E

Electronic Micrometers

Stock No.	Range	MIC0-3E
MIC0-1E	0"–1" (0–25.4 approx. mm)	•
MIC1-2E	1"–2" (25.4–50.8 approx. mm)	•
MIC2-3E	2"–3" (50.8–76 approx. mm)	•
MIC3-4E	3"–4" (76–101 approx. mm)	
MIC4-5E	4"–5" (101–127 approx. mm)	

MIC0-3E Electronic Micrometer Set

- Supplied in protective metal case with foam insert
- Foam insert with two extra pockets for additional Micrometers (3–4" and 4–5")
- Supplied with two standards 1" and 2"
- Accuracy (in) ± .0001", (mm) ± .002 mm
- Includes a large, easy-to-read, high-contrast LCD digital readout
- Hard and stable one-piece friction thimble permits one-hand operation of micrometer and uniform contact pressure
- No-glare satin chrome finish on thimble and sleeve minimizes annoying surface glare under bright lights indoors
- Balanced frame design for comfortable and accurate measuring
- Hardened, CNC machine ground and hand lapped spindle screw
- Inch/millimeter metric conversion provides simple, universal, standardized unit of measurement at any position
- Measurement hold button
- Micro-lapped carbide measuring faces
- Preset button to install any reading at any position
- Automatic off functionality

MIC1MB

MIC103MB

Digital Micrometers, mm *(Blue-Point)*

- Standard reading in .01 mm increments on mechanical digital display
- Large easy-to-handle insulated frame, carbide-tipped anvils, positive locking clamp and ratchet stop thimble

Stock No.	Range, mm	Increments, mm
MIC1MB	0–25	0.01
MIC2MB	25–50	0.01
MIC3MB	50–75	0.01
MIC4MB	75–100	0.01
MIC5MB	100–125	0.01

MIC103MB Digital Metric Micrometer Set *(Blue-Point)*
MIC1MB, MIC2MB and MIC3MB in fitted case with standards.

MICB1B

MICB103B

Outside Micrometers, inches *(Blue-Point)*

- Large easy-to-handle insulated carbide-tipped anvils, positive locking clamp and ratchet stop thimble

Stock No.	Range, inches	Increments, inches	MICB103B
MICB1B	0–1	.0001	•
MICB2B	1–2	.0001	•
MICB3B	2–3	.0001	•
MICB4B	3–4	.0001	
MICB5B	4–5	.0001	

MICB103B SAE Set *(Blue-Point)*
Includes: MICB1B, MICB2B, MICB3B (3pc) in fitted case with standards.

MICED1B

MICINSIDE12

MICED1B Electronic Digital Micrometer *(Blue-Point)*

- Display reads to 0.00005" (0.001 mm)
- Zero set for absolute and incremental measuring modes
- Auto shutoff after ten minutes
- Insulated frame, hardened body, carbide-tipped anvil, positive locking clamp and ratchet stop thimble

MICINSIDE12 Inside Micrometer Set *(Blue-Point)*

- Range is 2–12" in .001" increments
- Includes inside micrometer head and a series of coil spring pressure contact rods

MIC22

Micrometer Test Gauges (Blue-Point®)

- Test gauges are used as micrometer standards
- Accuracy meets Federal Specifications

Stock No.	Size
MIC22	1"
MIC32	2"
MIC42	3"
MIC52	4"
MIC2M2	25 mm
MIC3M2	50 mm

MROUND4

Small Hole Gauge Set

Stock No.	Range, inches
CM4311	0.125–0.200
CM4312	0.200–0.300
CM4313	0.300–0.400
CM4314	0.400–0.500

MROUND4 Small Hole Gauge Set

- Knurled knob at handle for size adjustment
- Full round gauging surface with flat bottom

TEE6

MTEE6

Telescoping Gauge Sets

Stock No.	Range, inches	TEE6	MTEE6*
TEE6-1	5/16–1/2	•	
TEE6-2	1/2–3/4	•	
TEE6-3	3/4–1 1/4	•	
TEE6-4	1 1/4–2 1/8	•	
TEE6-5	2 1/8–3 1/2	•	
TEE6-6	3 1/2–6	•	
CM4349*	5/16–1/2		•
CM4350*	1/2–3/4		•
CM4351*	3/4–1 1/4		•
CM4352*	1 1/4–2 1/8		•
CM4353*	2 1/8-3 1/2		•
CM4354*	3 1/2–6		•

**Blue-Point*

TEE6 Telescoping Gauges

- Constant spring tension gives uniform contact pressure
- Both plungers are easily locked at any desired setting
- Handles are rigidly attached to the contact plungers and are automatically self-centering

DM6

Stock No.	Description	DM6
DM61	4" Rod	•
DM62	5" Rod	•
DM63	6" Rod	•
DM64	7" Rod	•
DM65	8" Rod	•
DM66	9" Rod	•
DM67	Micrometer Head	•
PBDM6	Storage Case	•
DM6	Depth Micrometer Set	•

DM6 Depth Micrometer Set *(Blue-Point)*

- Measure depths of slots, counterbores, holes and keyways up to 6" in depth
- 4" satin chrome base for greater stability
- Graduated in .001" increments

GA2-6B

Bore Gauge

GA2-6B Dial Bore Gauge

- All anvils laser marked for easy selection
- Gauge chart for quick and easy anvil selection
- Supplied in metal case with foam insert
- Ergonomic design with nonslip insulating grip
- Carbide contacts for extended wear
- Graduations 0.0005"
- Approximate depth 6"

WARNING • Read safety precautions on pages W1 to W4

MEASURING: CALIPERS/MAGNETIC BASE

CAL6D

CAL6E

CAL6V

Calipers

CAL6D Dial Caliper, 6"
- White-faced dial caliper, 0"–6" range, .001" graduations
- Accuracy (in) ± .001"
- Sharp, clear dial graduations
- Adjustable bezel
- Double rack pinion gears provides anti-backlash control
- Hardened stainless-steel, all-metal construction
- Beryllium copper gib in the slide assembly and polished bar guarantees smooth operation
- Depth rod covers rack to protect against damage
- Lock screw for sliding jaw and dial bezel
- Fine adjustment thumb wheel
- Supplied in plastic case with foam insert

CAL6E Electronic Caliper, 6"
- Stainless-steel, .0005" resolution, and 0"–6" measuring range
- Lightweight and comfortable
- Auto-off after 30 minutes, last measuring position is retained
- Inch/millimeter conversion reads .0005" or 0.01 mm
- Accuracy (in) 0"–4" (± .001") 4"–6" (± .0015")
- Accuracy (mm) 0mm–100mm (± 0.025 mm) 100 mm–150 mm (± 0.04 mm)
- Hardened stainless-steel body
- At .320" the digits on this tool are easy to read
- Beryllium copper gib in slide assembly and polished bar guarantees smooth operation
- Integrated depth rod
- Fine adjustment thumb wheel
- Zero at any position
- Supplied in plastic case with foam insert

CAL6V Vernier Caliper, 6"
- Caliper includes metric/inch readings, 150 mm/6" range, .02 mm/.001" graduations
- Accuracy (in) 0"–4" (± .001") 4"–6" (±.0015")
- Accuracy (mm) ± .025 mm per 300 mm
- Lock screw for sliding jaw
- Hardened stainless-steel depth rod
- Sharp, black graduations on satin chrome finish bar
- Laser etching on the vernier plate and bar guarantees an easy-to-read caliper
- Beryllium copper gib in the slide assembly and polished bar guarantees smooth operation
- Supplied in plastic case with foam insert

MCAL6A

MCAL12A

PMF147A

Calipers (Blue-Point®)

MCAL6A Electronic Digital Caliper
- Range is 0"–6" (0 mm–150 mm) in 0.0005" (0.01 mm) resolutions
- Use for inside, outside, depth and step measurements
- Inch/metric conversion with one button
- Large LCD display
- Hardened stainless-steel frame

MCAL12A Electronic Digital Caliper *(Blue-Point)*
- Essential tool for working on larger vehicles, trucks, tractors and earth moving equipment
- Range is 0"–12" (0 mm–305 mm) in 0.0005" (0.01 mm) resolutions
- Use for inside, outside, depth and step measurements
- Inch/metric conversion with one button
- Large LCD display with floating zero set
- Locking nut and thumb roll for smooth action

PMF147A US/Metric Dial Type Caliper
- Range is 0"–6" (0 mm–150 mm) in 0.001" (0.1 mm) increments
- Includes storage case

Dial Test Indicator Sets

GA3400 Universal Dial Test Indicator Set
- Small dial indicator set
- .200" range with .001" graduations
- Easy-to-read white on black dial face
- Traditional fixed clamp-style attachment
- Excellent choice for machining applications

GA3640 Long Range Dial Test Indicator Set

GA3645 Long Range Dial Test Indicator Set

GA3634 Ball Joint/Disc Brake Test Indicator Set
- All purpose indicator sets
- Perfect for general use
- Indicator with 0"–1" range and .0005" graduations
- Easy-to-read white on black dial face
- GA3640 uses a fixed magnetic base
- GA3645 uses a conforming magnetic base for more mounting options
- GA3634 uses locking pliers and a flexible gooseneck for non-magnetic applications and difficult areas
- Ideal for brake and undercar work

GA3450 Universal Pinion Depth Gauge
- Rear pinion depth gauge
- Accurate pinion depth setup for vehicles up to 1 ton
- Premeasure pinion depth to use with OEM gear sets

GA3400

GA3640

GA3645

GA3634

GA3450

Dial Test Indicator Set Specifications

Stock No.	Range	Graduations	Reading
GA3400	.200"	.001"	0–100
GA3640	1.00"	.0005"	0–50
GA3645	1.00"	.0005"	0–50
GA3634	1.00"	.0005"	0–50
GA3450	0.00"–4.00"	.0005"	0–50

Contact Points and Extensions

GA3601 Dial Indicator Extension
- Use with GA3400, GA3634, GA3640 and GA3645 dial test indicators
- 4–48 female thread allows the extension of any contact point for special applications
- 6" long

GA3609 Contact Point Set
- Use with GA3400, GA3634, GA3640 and GA3645 dial test indicators
- 4–48 female thread allows the extension of any contact point for special applications
- Extensions can be joined together to extend reach
- Contact points feature a polished tip with radius end and are manufactured from hardened steel
- Includes four 1" extensions, four contact points (0.2", 0.4", 0.6" and 0.8") plus holder for set components

GA3601

GA3609

WARNING • Read safety precautions on pages W1 to W4

MEASURING: DIAL TEST INDICATOR GAUGES

GA1UD

GA1D

GA1FPMB

GA3JAMB

Dial Gauges

Graduations .001" and Reading 0–100

GA1UD Universal Back Plunger Dial Indicator

- Range .200"
- Accurate, reliable and simple to operate
- Rugged, with few moving parts
- Smooth in operation
- Indicator with three contact points and adaptor
- Shank diameter is 1/4" (6.3 mm)
- Knurled bezel

GA1D Dial Indicator

- Range 1.000"
- Dial Indicator has shockless, hardened steel gear train and jewel bearings
- Massive bridge for rigid bearing support
- Unbreakable crystal
- Rugged simple unit construction with a “universally fitting” design
- Hardened stainless-steel stem, gears and pinions
- Sharp bezel serrations for positive grip

GA1FPMB Flex-O-Post Magnetic Base

- Complete assembly is for use with all test, back-plunger, AGD, dial and miniature dial indicators
- The flexible post is an assembly of short tubular steel sections and precision ball joints, linked by an internal steel cable
- The indicator snug on the end of the post can be rotated through 360° and locked in any position
- This makes it possible to use indicators in awkward places that are hard to reach with conventional holding devices
- Assembled to the magnetic base, the post has a vertical reach of approximately 15" (380 mm) and a horizontal reach of approximately 10" (250 mm)
- The base has three precision-ground magnetic contact surfaces
- V-step holds base to arbors, shafts, chucks

GA3JAMB Triple Joint Arm Magnetic Base

- This versatile indicator holder has three pivots available for positioning the indicator where needed
- All pivots are controlled by one tightening knob
- Works with any indicator with a 3/8" (9.5 mm) stem, standard dovetail mount, body clamp or with a 1/4" (6.3 mm) or 3/16" (4.7 mm) shank
- The working area is within a hemisphere having a radius of approximately 12" (300 mm)
- The very sensitive fine-adjustment is located on the magnetic base to eliminate indicator deflection when it is being adjusted

CM6416

Magnetic Base

CM6416 Holder (Blue-Point®)

- Magnet has on/off switch
- Base is 2 3/8" x 1 7/8" x 2 1/2"
- Post 7" x 15/16"; Rod 6" x 25/64"
- Will grip flat or curved metal surfaces

LEVELS AND FEELER GAUGES

YA328A

TL900L

YA328A Angle Locator

- Ideal for checking drive shaft angle
- Red degree indicator located behind numbers for exact reading of graduations
- Fractional and metric scales molded into base of tool in 1/8" and centimeters
- Large 1 7/8" x 7/8" magnet in base for secure retention

TL900L 9" Aluminum Lighted Level *(Blue-Point)*

- Lighted level for more accurate readings under all conditions
- Machined Billet Aluminum for added durability
- Rare earth magnets attach to ferrous surfaces
- 45°, 90° and 180° scales for flexibility
- Uses two AAA alkaline cells (included)
- Auto shutoff feature after ten minutes extends battery life

FB310B

FB325A

FB335

FBL325A

FBM320

FB31S

General Use

Stock No.	No. of Blades	Blade Dimensions, inches	Blade Size	Increments	Description
FB310B	13	1/2 x 3	.001", .0015", .002"–.008", .010", .012", .013", .015"	—	Double stamped with US and metric sizes
FB325A	25	1/2 x 3	.0015", .002"–.025"	.001"	Double stamped with US and metric sizes
FB335	35	1/2 x 3	.0015", .002"–.035"	.001"	Swedish feeler blade steel
FBL325A	25	1/2 x 12	.0015", .002"–.021", .025", 027", .030", .040	.001"	Long blade, double stamped with US and metric sizes
FBM320	20	1/2 x 3	.05 mm–1 mm	.05 mm	Metric Feeler Gauge Set
FB31S	31	1/2 x 3	.0015"–.035"	—	General use thickness gauge

FB316B

FB326B

Ignition

Stock No.	No. of Blades	Blade Dimensions, inches	Blade Size	Increments	Description
FB316B	18	1/4 x 1 3/4	.010", .012", .013", .015"–.022", .024"–.026", .028", .030", .032", .035"	.001"	Short Blade, Ignition/Spark Plug Gauge Set
FB326B	26	1/2 x 3	.008", .010", .012", .013", .015", 017", .018", .020", .022", .024"–.026", .028", .030", .032", .035"	.001"	Double stamped with US and metric sizes

FB300A

FB308D

FB322

FB328A

FBM322

Bent and Step Blades

Stock No.	No. of Blades	Blade Dimensions, inches	Blade Size	Increments	Description
FB300A	25	1/2 x 3	.006"–.030"	.001"	Feeler Gauge Set
FB308D	12	1/2 x 3	.008"–.010", .011"–.013", .013"–.015", .014"–.016", .015"–.017", .017"–.019", .018"–.020", .020"–.022", .023"–.025", .025"–.027", .026"–.028", .028"–.030"	.001"	Step Feeler Gauge Set
FB322	22	1/2 x 3 3/8	.004"–.006",.025"–.027"	.001"	"Go-No" blades with 2 sizes each.
FB328A	2	1/2 x 3	.011"–.013", .013"–.015"	—	For valve adjustment on GM® 8.2 L engines, double stamped with US and metric sizes
FBM322	2	1/2 x 3	.20 mm–.30 mm, .40 mm–.50 mm	—	10 3/4" long bent handle.



FB307D

Diesel

Stock No	No. of Blades	Blade Dimensions, inches	Blade Size	Increments	Description
FB307D	14	1/2 x 4 1/2	.008", .011"–.014", .016"– .018", .020", .023"–.025", .027", .029"	.001"	Bent Blade Cummins® Diesel, blade ends are bent at 90° angle: blades are secured on FB307C1 ring

WARNING • Read safety precautions on pages W1 to W4

MEASURING: FEELER/SPARK PLUG GAUGES

FB305A

FB3330

FBP10

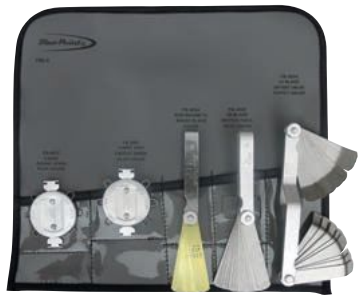

FBS5

Specialty Feeler Gauges

Stock No.	No. of Blades	Blade Dimensions, inches	Blade Size	Increments	Description
FB305A	6	1/2 x 3	.006", .008", .010", .012", .014", .016"	.002"	Non-magnetic, double stamped fractional and metric sizes
FB3330	25	1/2 x 4	.010", .012", .014", .016", .018", .020", .022", .024", .027", .030"	.001"	Double stamped with fractional and metric sizes

FB3330 Easy Grip Feeler Gauge Set
- Double stamped with fractional and metric sizes
- Ten feeler gauges with orange screwdriver-type handles in FB33301 wood box
- Blades feature a 45° offset for use on valve tappets and air gapping applications
- Includes: 25 blades available in all (.006"–.030")

FBP10 Pocket Feeler Blade
- Flat, ramp style feeler gauge handles full range of spark plug gapping requirements from .020"–.080"
- Reverse side has metric scale to 2 mm
- Orange screwdriver-type handle with pocket clip, 5 1/2" length

Feeler/Gap Gauge Set

FBS5 Feeler and Gap Gauge Set
- Five-piece set includes: FB300A bent blade feeler gauge, FB305A non-magnetic feeler gauge, and FB325A general use feeler gauge, plus GA461C and FB360C spark plug gap gauges in the FBS5-1 kit bag

FB301A

FB302A

FB303B

GA461C

FB360C

FB361A

Spark Plug Gauges/Gappers (Blue-Point®)

FB301A Wire Gap for Point Ignition Systems Gauge
- Includes eight wires in sizes .020", .022", .025", .028", .030", .032", .035" and .040" and electrode bender

FB302A Wire Gap for Aircraft, Motorcycle and Small Engines Gauge
- Includes eight wires in sizes .015", .016", .018", .020", .025", .028", .030" and .035" and electrode bender

FB303B Wire Gap for Electronic Ignition Systems Gauge
- Includes six wires in sizes .044", .045", .050", .054", .060" and .080" and electrode bender

GA461C Gap for Point Ignition Systems Gauge
- Includes six wires protruding 1/4" from edge of metal disc
- Wire sizes are .025", .030", .034", .035", .040" and .045"
- Built-in electrode bender
- Double stamped with decimal and metric sizes

FB360C Gap for Electronic Ignition Systems Gauge
- Includes six wire sizes: .040", .044", .045", .050", .060" and .080"
- Double stamped with decimal and metric sizes

FB361A Gapper Gauge
- Pocket size gapper features an inclined ramp for setting gap
- 1 1/2" diameter. Range .020"–.100"
- Double stamped with decimal and metric sizes

Decimal/Metric Conversion Chart

Decimal, inches	Metric, mm	Decimal, inches	Metric, mm	Decimal, inches	Metric, mm	Decimal, inches	Metric, mm	Decimal, inches	Metric, mm	Decimal, inches	Metric, mm
0.0010	0.025	0.007	0.178	0.015	0.381	0.023	0.584	0.031	0.787	0.042	1.067
0.0015	0.038	0.008	0.203	0.016	0.406	0.024	0.610	0.032	0.813	0.044	1.118
0.0020	0.051	0.009	0.229	0.017	0.432	0.025	0.635	0.033	0.838	0.046	1.168
0.0025	0.064	0.010	0.254	0.018	0.457	0.026	0.660	0.034	0.864	0.052	1.321
0.0030	0.076	0.011	0.279	0.019	0.483	0.027	0.686	0.035	0.889	0.054	1.372
0.0040	0.102	0.012	0.305	0.020	0.508	0.028	0.712	0.036	0.914	0.056	1.422
0.0050	0.127	0.013	0.330	0.021	0.533	0.029	0.737	0.038	0.965	0.060	1.524
0.0060	0.150	0.014	0.356	0.022	0.559	0.030	0.762	0.040	1.016	0.080	2.032

Feeler Blades and Holder (Blue-Point®)

FB6B0015 thru FB6B040 (12") Feeler Gauge Blades

Includes 34 blades as follows:

Stock No.	Blade Size	Stock No.	Blade Size	Stock No.	Blade Size	Stock No.	Blade Size
FB6B0015	.0015"	FB6B009	.009"	FB6B018	.018"	FB6B027	.027"
FB6B002	.002"	FB6B010	.010"	FB6B019	.019"	FB6B028	.028"
FB6B0025	.0025"	FB6B011	.011"	FB6B020	.020"	FB6B029	.029"
FB6B003	.003"	FB6B012	.012"	FB6B021	.021"	FB6B030	.030"
FB6B004	.004"	FB6B013	.013"	FB6B022	.022	FB6B032	.032"
FB6B005	.005"	FB6B014	.014"	FB6B023	.023"	FB6B035	.035"
FB6B006	.006"	FB6B015	.015"	FB6B024	.024"	FB6B040	.040"
FB6B007	.007"	FB6B016	.016"	FB6B025	.025"		
FB6B008	.008"	FB6B017	.017"	FB6B026	.026"		

FB6B040

FB312 Feeler Gauge Holder

Thread Identification

T1DG Drill Gauge
- Leaves the right amount of stock for approximately 65% full thread
- Easy-to-read white lettering on matte black finish
- Shows correct drill body size
- 60 holes with number sizes and decimal equivalents
- Made of hardened steel to resist wear
- Tested for accuracy and hardening

T27GS SAE Thread Gauge
- 27 leaves – 1/4-28 TPI

T28GM Metric Thread Gauge
- 28 leaves – .25 mm–2.5 mm
- Quickly determine the pitch of various threads
- Leaves on most gauges have a special narrow design, permitting checking of internal threads as well as external threads
- Clearly graduated on polished finish
- Locking device

T60K Thread Measurement Kit
- Drill gauge with both fractional and metric thread pitch gauges in one kit
- Drill Gauge provides correct sizing of a tap drill for any commonly sized machine screw tap in “NF” National Fine or “NC” National Coarse Thread Series. Nos. 1–60 and .228"–.040"
- Leaves on most gauges have a special narrow design, permitting checking of internal threads and external threads
- Leaves the right amount of stock for approximately 65% full thread
- Easy-to-read white lettering on matte black finish
- Shows correct drill body size
- 60 holes with number sizes and decimal equivalents
- Made of hardened steel to resist wear
- Tested for accuracy and hardening
- Clearly graduated on polished finish
- Locking device
- Fits in your pocket
- Packaged in red plastic box with foam insert

T60K

COMBOSQ3

SQUAREB12

SQUARECOMB12

Measuring Sets

COMBOSQ3 Combination Square
- Includes reversible lock bolt, scriber, spirit level in both square head and protractor head
- Direct reading double 180° protractor
- Forged and hardened steel heads with smooth black enamel finish
- Spring-tempered steel blade
- Blade has non-glare satin chrome finish
- Blade has deep, black filled, chemical machined graduations that will last a lifetime
- Supplied in protective plastic case with foam insert

SQUAREB12 Machinist’s Measuring Set
- Includes SQUAREB90 sliding head and RULER12BSQ steel rule in fitted storage case

SQUARECOMB12 Combination Measuring Set
- Includes SQUAREB180 protractor, RULER12BSQ steel rule plus SQUAREB90 and SQUAREB45 sliding heads in fitted storage case

SQUAREB90 Sliding Head (90°)
- 90° square head with bubble level and scriber points

SQUAREB180 Protractor Head (180°)
- Protractor is graduated 180° in both directions
- Includes bubble level

RULER12BSQ Steel Rule (12")
- Precision ground and hardened steel blade for greater accuracy
- Graduated in 1/8" and 1/16" increments on one side and 1/32" and 1/64" increments on the other

SQUAREB45 Sliding Head (45°)
- Center head for 45° angles only

WARNING • Read safety precautions on pages W1 to W4

MEASURING: STRAIGHT EDGES AND STEEL RULES

GA438A

Precision Straight Edges

- Use with feeler gauges to check for distortion in engine blocks, cylinder heads, flywheels, main bearing saddles, cam bearing saddles, cam covers and bell housings
- Precision working edge ground to within .0002" per 12" in length
- Great stability with 1/4" thickness and 1 1/2" width
- Convenient hanging hole and edge protector

GA435 Precision Straight Edge
18" long.

GA438A Precision Straight Edge
24" long.

GA535 Precision Straight Edge
35" long.

RULER6

RULER12

RULER120

RULER600

RULER601

RULER602

Steel Rules

RULER6 Steel Rule, 6"
- Graduations in 8ths, 16ths, 32nds, 64ths
- Spring-tempered steel
- Non-glare satin chrome finish
- Deep, black filled, chemical machined graduations that will last a lifetime
- Quick reading, end graduations
- Burr-free

RULER12 Steel Rule, 12"
- Graduations in 8ths, 16ths, 32nds, 64ths
- Spring-tempered steel
- Non-glare satin chrome finish
- Deep, black filled, chemical machined graduations that will last a lifetime
- Quick reading, end graduations
- Burr-free

RULER120 US/Metric Steel Rule
- 12" stainless-steel rule
- 1/32" increments for first 3", 1/16" increments for last 9"
- Metric edge is etched with mm and cm increments

RULER600 Steel Rule
- 6" stainless-steel rule
- Graduated in 1/32" and 1/64" increments

RULER601 Steel Rule (6")
- 6" stainless-steel rule
- Graduated in 1/10" and 1/50" increments on one side, 1/32" and mm increments on the other

RULER602 US/Metric Pocket Rule (6")
- 6" stainless-steel rule with pocket clip
- 1/32" and 1/64" increments on one side, mm and cm increments on the other

TAPE RULES

TPMA10

TPMA12

TPMA25

TPMAM5

TPMA25EM

TPM100

Auto-Retracting Tape Rules

TPMA10 Tape Rule (10')
1/2" x 10' tape. Includes inch/metric scale with fractions.

TPMA12 Tape Rule (12')
3/4" x 12' tape. Includes inch scale with 16" stud markings.

TPMA25 Tape Rule (25')
1" x 25' tape. Includes inch scale with 16" stud markings.

TPMAM5 Tape Rule (5 m)
19 mm x 5 m tape. Includes metric scale.

TPMA25EM Tape Rule (25')
1" x 25'/7 m tape. Includes inch/metric scale with fractions.

Steel Housing Tape Rule

TPM100 Tape Rule (Blue-Point®)
- Includes inch/metric scale
- Quick rewind design for ease of use
- Rewinding lever conveniently stored in housing
- Nonslip grip provides confidence and comfort

LED Lighted Magnetic Pick-up Tools (Blue-Point®)

UPT1LT LED Magnetic Pick-up Tool
- Steel magnetic head lifts 8 lb and will not attach to unwanted metal surfaces
- Telescopes from 6 3/4 –27 3/4"

UPT2LT LED Magnetic Pick-up Tool
- Rotating magnetic heads lift up to 8 lb
- Telescopes from 8"–32 3/4"

UPTLP2 Pen Light Pick-up Tool
- Newly designed steel magnetic head lifts 8 lb and shields the sides from attaching to unwanted metal surfaces
- LED light illuminates dark areas
- Stainless-steel handle telescopes from 8"–32 3/4"

UPT1LT

UPT2LT

UPTLP2

GA265A

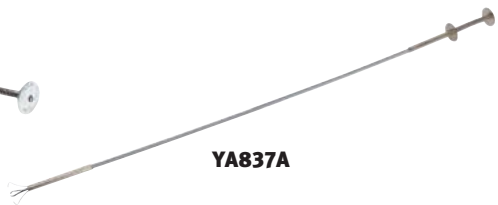

YA837A

GA353B

DPTC24

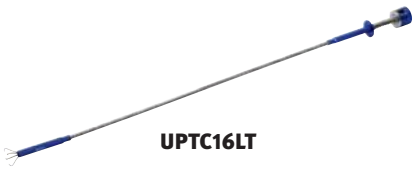

UPTC16LT

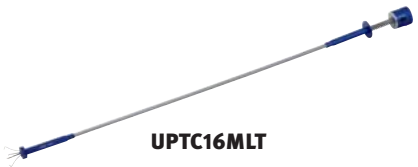

UPTC16MLT

Claws (Flexible) *(Blue-Point)*

Stock No.	No. of Claws	Max. Jaw Opening, inches	Flexible Section Length, inches	Overall Length, inches
GA265A	2	1	8	17 3/4
YA837A	4	3/4	16	23 1/2
GA353B	4	1	8	17 1/2
DPTC24	4	1 1/4	24	24 1/2
UPTC16LT	4	1	16 3/4	26
UPTC16MLT*	4	1	16 3/4	25 11/16

*Lighted

UPTC16MLT Lighted Flexible Spring Claw
- Magnet able to pick up a maximum of 5 lb
- Four-jaw claw opens wide to secure hard-to-reach objects
- Heavy duty aluminum plunger with convenient side switch turns on/off bright LED light as needed
- Tightly wound, flexible spring snakes into tight areas
- Comes with two round CR2032 lithium batteries
- 25 11/16" long

WARNING • Read safety precautions on pages W1 to W4

MIRRORS/PICK-UP TOOLS Blue-Point®

PTS5

PT28E

PTIM5

PT30C

PT5C

UPT15

PT5CBL

UPT35

PHT5

UPT50A

PHT5RD

UPT65

PT7B

US225

ECFM20

DPTM24

PT40B

UPT2FL

PT10C

Magnetic

PTS5 Magnetic Pick-Up Tool/ Scribe
- Magnet in one end and a replaceable carbide steel scribe tip at the other
- 5" long, do not use as a pry bar or punch
- Includes pocket clip

PTIM5 Pick-Up and Inspection Tool
- Magnet end lifts 1 1/2 lb
- Length is 26 3/4" extended, closes to 5 7/8"
- Mirror end is 1 1/4" in diameter
- Includes pocket clip

PT5C Telescopic Magnetic Pick-Up Tool
- 5 7/8" extends to 25 9/16"
- Chrome finish
- Magnet lifts up to 2 lb
- Includes pocket clip

PT5CBL Telescopic Magnetic Pick-Up Tool (Blue)

PHT5 Magnetic Pick-Up Tool
- Lifts 2 1/2 lb
- Chrome plated shaft extends from 5 1/2"–25 1/2"
- Powercap® shields sides of magnet for focused lifting
- Black cushion grip will not slip in oily or wet hands

PHT5RD Magnetic Pick-up Tool (Red)
- Tool lifts 2 1/2 lb
- Telescopes from 5 1/2"–25 1/4"
- *Powercap* shields sides of magnet for focused lifting

PHT5BL Magnetic Pick-up Tool (Blue)

PHT5GR Magnetic Pick-up Tool (Neon Green)

PHT5OR Magnetic Pick-up Tool (Orange)

PT7B Magnetic Pick-Up Tool
- Lifts 1 lb, 6" long

ECFM20 Flexible Magnetic Pick-Up Tool
- 18" (457.2 mm) flexible shaft gets in tight places
- Long lasting, bright LED light source
- Anodized aluminum housing for lightweight and resistance to corrosion
- Powerful neodymium magnet lifts 1.1 lb (0.5 kg)
- Powered by three “N” alkaline 1.5V batteries (included)

PT40B Flexible Magnetic Pick-Up Tool
- Magnet lifts 3 1/2 lb
- Length is 21", including a 14" flexible section

PT10C Pick-Up Tool
- Lifts 1 lb, 8 5/8" long

PT28E Pick-Up Tool
- Lifts 2 lb
- 16 3/4" long and extends to 26 3/4"
- Aluminum head
- Probe O.D. is 1/2"

PT30C Pick-Up Tool
- Lifts 6 1/2 lb
- 17" long and extends to 27 1/8"

UPT15 Telescoping Magnetic Pick-Up Tool
- Lifts 2 lb
- 6 5/8" long and extends to 33 1/4"

UPT35 Telescoping Magnetic Pick-Up Tool
- Lifts 4 1/2 lb
- 6 5/8" long and extends to 33 1/4"

UPT50A Telescoping Magnetic Pick-Up Tool
- Lifts 10 lb
- 6 5/8" long and extends to 33 1/4"

UPT65 Telescoping Magnetic Pick-Up Tool
- Goblet shaped magnetic head directs the flux to the front of the magnet to lift 16 lb
- Head shields the sides of the magnet from attaching to unwanted ferrous surfaces
- Telescopes from 9"–34 1/4"

UPTM65K Magnetic Inspection Kit
- Includes UPT65 pick-up tool and US225 inspection mirror in vinyl pouch

US225 Inspection Mirror
- Attaches to UPT65 pick-up tool
- Dual ball adjustment provides 2 1/4" diameter infinite positioning

DPTM24 Flexible Magnetic Pick-Up Tool
- When retracted, magnet will not adhere to untargeted ferrous metals
- Depress plunger to expose magnet from shroud and grab desired object
- 24" flexible shaft easily maneuvers through tight spots
- Cushion grip handle provides comfort and control

UPT2FL Flexible Magnetic Pick-Up Tool
- 29" aluminum shaft can be easily bent at any angle
- *Powercap* slides over the magnet and shields its sides from attaching to unwanted metal surfaces
- Will pick up 5 lb with power cap

Hinged Mirrors

UIM2FL Flexible Inspection Mirror
- 32" aluminum shaft can easily be bent to any angle
- 2 1/4" mirror is encased in a rugged stainless-steel head
- All-angle ball joint holds mirror head tightly at any angle
- Textured cushion grip will not slip in wet or oily hands

GA294 Rectangular Mirror
- Double ball joints allow mirror to swivel 360°
- Electrolytic plated copper backing
- Non-rotating telescoping rods
- Vinyl grip
- 2 1/8" x 3 1/2" mirror
- Closed length is 11 1/4"; extended length is 15 1/4"

GA295 Round Mirror
Similar to GA294 except with a 2 1/4" diameter mirror. Closed length is 10"; extended length is 14".

UIM2FL

GA294

GA295

GA51B

GA52B

GA53A

Stock No.	Overall Length, inches	Mirror Size, inches	Glass Replacement Mirror	Plastic Replacement Mirror
GA51B	16 1/2	1 11/16 x 2 9/16	GA51B1	GA51B1P
GA52B	11	1 3/16 x 1 1/2	GA52B1	—
GA53A	16 1/2	2 5/16 x 3 3/8	GA53A1	GA53A1P

Pocket Mirrors

PTM143 Round Pocket Mirror
Handle extends from 4 1/2"–17". 1 1/4" in diameter. Hinge mechanism allows 360° adjustment. Includes pocket clip.

PTM143

CF143MA Round Pocket Magnifying Mirror
Handle extends from 4 1/2"–17". 1 1/4" in diameter. Hinge mechanism allows. Includes pocket clip. 360° adjustment.

PTM147 Round Pocket Mirror
Handle extends from 4 1/2"–17". 3/4" in diameter. Hinge mechanism allows 360° adjustment. Includes pocket clip.

PTM157 Oval Pocket Mirror
Handle extends from 4 1/2"–17". 1" x 2" oval. Hinge mechanism allows 360° adjustment. Includes pocket clip.

PTM157

Lighted Mirrors

YA5160A Lighted Adjustable Mirror
- Mirror size is 1 1/8" x 2 1/8" with 1x magnification
- Thumb wheel adjustment on handle
- Light at base of 18" long flexible handle powered by two (AA) batteries (included)

YA5160A

YA51601 Replacement Mirror
YA51602 Replacement Mirror
YA5160A3 Replacement Bulb

Telescoping Mirrors

UIM125 Telescoping Inspection Mirror
1 1/4" diameter mirror. 6 1/2" long and extends to 35".

UIM225 Telescoping Inspection Mirror
2 1/4" diameter mirror. 6 1/2" long and extends to 35".

UIM225

UIM225RD Telescoping Inspection Mirror
Same as UIM225 but with red handle.

UIM225GR Telescoping Inspection Mirror
Same as UIM225 but with green handle.

UIM225OR Telescoping Inspection Mirror
Same as UIM225 but with orange handle.

UIM325 Telescoping Inspection Mirror
3 1/4" diameter mirror. 6 1/2" long and extends to 29 1/2".

TKSS01MIR Telescoping Hinged Steel Mirror
- Steel mirror will not shatter if dropped
- Hinged for accurate positioning, telescopes from 7" to 28 1/2" (177.8mm–723.9 mm)
- Mirror surface is 3.12" x 2" (79.4 mm x 50.8 mm)
- In retracted position, it will easily fit in shirt pocket

TKSS01MIR

UIM2LM Magnifying Inspection Mirror
- Stainless-steel handle telescopes from 11 1/2" –51 1/2"
- 2 1/4" magnifying mirror enlarges viewing area
- All-angle ball joint holds mirror head tightly at any angle

UIM2LM

UIM2NR No Swivel Rectangular Telescoping Mirror
- All-angle ball joint holds mirror head firmly at any angle
- Stainless-steel handle is long, strong and lightweight
- Heavy duty grip will not slip in wet or oily hands
- Adjusts from 6–3/4" to 29–3/4"
- 2 9/16" x 3 3/4" rectangular head

UIM2NR

WARNING • Read safety precautions on pages W1 to W4

MIRRORS/PICK-UP TOOLS: MIRRORS

UIM1LT

UIM2LT

UIM3LT

UIM2RSLT

LED Telescoping Mirrors (Blue-Point®)

UIM1LT Lighted Inspection Mirror
Telescopes from 6 3/4"–35 1/2". Mirror is 1 3/8" diameter.

UIM2LT Lighted Inspection Mirror
Telescopes from 6 3/4"–37". Mirror is 2 3/8" diameter.

UIM3LT Lighted Inspection Mirror
Telescopes from 6 3/4"–30 1/4". Mirror is 3 3/8" diameter.

UIM2RSLT LED Lighted Inspection Mirror
Telescopes from 6 3/4"–30" for fast, accurate inspections. Mirror is 3 1/4" x 1 1/8".

BRAKE SERVICE TOOLS

YA4000B

Vacuum Pressure Pump Kit *(Blue-Point)*

YA4000B Automotive Test Kit
- Produces vacuum or pressure at the turn of a switch
- Comfortable ergonomic design
- One-finger trigger vacuum/pressure release
- Durable, accurate diaphragm type pressure/vacuum gauge
- Handheld vacuum/pressure pump with 2" compound gauge and rubber boot
- 12 oz fluid reservoir bottle with fluid transfer and storage lids plus fluid pick-up tube
- Kit contains multiple accessories as shown, including tapered manifold plugs, vacuum caps and bleed screw adaptors
- Master cylinder refill kit

Applications:
Vacuum and pressure related engine performance diagnostics and tune-ups; brake bleeding; fluid transfer, evacuation and sampling.

YA4008 Power Steering Adaptor Kit
- Bleeds trapped air from power steering systems by drawing a vacuum through the reservoir fill neck
- Can also be used to test leaks by placing the system under a vacuum and observing change in gage reading
- Each adapter is designed to fit snugly in the neck of the power steering reservoir to form an air-tight seal when vacuum is applied
- External vacuum source such as the YA4000B hand vacuum pump is required (sold separately)
- Includes four adaptors: YA4008-1 (Ford®), YA4008-2 (GM®), YA4008-3 (universal) and YA4008-4 (right angle)

Carbide Insert Bit Kits

BTK10A

BDT063-10 Negative Rake Carbide Bits – 10 Pack
- Use for EEBR309A, EEBR312A and Ammco® brake lathes

BDT103-06 Positive Rake Carbide Bits – 6 Pack
- Use for EEBR310A, EEBR312A and *Ammco* brake lathes

BDT385-06 Carbide Bits

BDT060-10 Positive Rake Carbide Bits – 10 Pack
- Use for Accu-Turn® brake lathes

BDT066-10 Positive Rake Carbide Round Tool Bits – 10 Pack
- Round tool bits for AMMCO940630 tool holder

BDT428 Positive Rake Round Tool Holder Set
- RH and LH used with EEBR308A, EEBR309A and EEBR312A for AMMCO940610 tool bits

BTA10 Carbide Bits
- For *Ammco* models 3000, 4000, 4100, 6900, 7000 and 7700

BTF10 Carbide Bits
- For all FMC lathes

BTK10A Carbide Bits
- For all Kwik-Way® lathes as well as older Snap-on® lathe models (YA282, YA278A and YA277 Series)

Silencers

BDT80

BDT80 Silencer Band
- For passenger car/light truck drums
- 1 3/4"

BDT69 Silencer Band
- For ventilated rotors

BDT96-2 Silencer Band
- For non-vented rotors 6 1/2" diameter
- Package of two

BDT94-2 Silencer Band
- For non-vented rotors 9 1/4" diameter
- Package of two

BDT980 Spring Silencer Assembly
- For ventilated rotors

Vacuum Type Brake Bleeders

BB9018

BB9018 Vacuum Brake Bleeder
- Fast efficient, one person vacuum bleeding
- Works with all braking systems
- Large 3 pint (1.5 liter) container
- Generates 25 in Hg vacuum with air pressure of 100 PSI
- Specially formulated seals allow unit to be used with a variety of fluids
- On/Off valve and Flow Regulator
- Unit can be sealed when not in use to prevent spillage
- Quick release, locking trigger and safety shutoff valve
- Overfill check valve
- Compact design – fits under wheel well
- 19 1/2" (500 mm) suction hose
- Universal brake screw fitting

BB9008KIT Brake Bleeder Kit
- Includes: BB9008 vacuum brake bleeder and BB5002A auto refiller bottle

BB9008

BB9008 Vacuum Brake Bleeder
- Same as BB9018 except container is 800 mL capacity

BB9008KIT Brake Bleeder Kit
- Includes: BB9008 vacuum brake bleeder and BB5002A auto refiller bottle

BB5002A

BB5002A Auto Refiller Bottle
- Automatically keeps reservoir filled to the correct level
- 20 fluid oz (592 mL) container
- Retaining clip for positive attachment
- Compact design fits under hood
- Positive venting system supplies continuous flow
- Fits virtually all master cylinder reservoirs: can be sealed when not in use to prevent spillage
- On/Off valve

WARNING
• Follow all safety messages in instructions
• Read safety precautions on pages W1 to W4

BRAKE: BLEEDER KITS

BB300B19

BB300B22A

BB300B26G

BB300B29G

BB300B39GC

BB300B41-G9

BB300B47G

Diaphragm Type Brake Bleeder Adaptors (Blue-Point®)

Stock No.	Description
BB300B19	VW® Adaptor (Water Cooled)
BB300B20	Dual Bleeding Attachment
BB300B21	Pop-off Valve
BB300B22A	Adaptor Set (7pc)
BB300B26G	Universal Brake Bleeder Adaptor
BB300B29G	3 1/4" Universal Round Adaptor
BB300B35G	Universal Adaptor
BB300B36G	GM® Dual Reservoir Adaptor
BB300B39GC	*GM*/Chrysler® Plastic Reservoir Adaptor
BB300B41-G9	Universal Rectangular Adaptor
BB300B42G	Universal Adaptor
BB300B45-G9	Universal Round Adaptor
BB300B47G	*Chrysler* Adaptor

BB100C

YA8925

Non-Diaphragm Type Brake Bleeder

BB100C Non-Diaphragm Type Brake Bleeder

- 1 gallon capacity
- Self-contained, hand-pressurized pump
- More than 10' of hose with shutoff, pressure gauge and quick coupler
- Uses the BB300B Brake Bleeder Adaptors (optional)
- Use only D.O.T. 3 or D.O.T. 4 automotive brake fluid

Master Cylinder Pressure Cap

YA8925 Master Cylinder Pressure Cap

- M45 x 3.50 thread adapts to fluid reservoir and 1/4"-18 and 3.5 mm thread for pressure bleeder
- For Mercedes®, BMW®, Audi® and Porsche®

BT27

BT11

131A

S6118A

BT19A

B1356E

BT15

BT17A

BT10

BT20

Brake Spring Tools

BT27 Single Spring Brake Tool (GM®) (Blue-Point®)
- Tool releases tension on both large and small *GM* single brake springs during servicing

Large Spring Applications:
2005 and later Chevrolet® Silverado®, 2004 and later *Chevrolet* Colorado®.

Small Spring Applications:
1991 and later *GM* H body (Bonneville®, LeSabre and Delta 88), 1992 and later GM C and U body (Buick® Electra, Olds 88, Cadillac® Fleetwood and DeVille®, Chevy® Lumina APV, Pontiac® Tran Sport and Olds Silhouette), and 1995 and later *Chevy* Lumina and *Chevy* Monte Carlo® vehicles.

BT11 Brake Spring Tool
- Services Bendix® brake springs and any spring attached to post
- Socket end removes; hook end replaces
- 9 3/4" long

131A Brake Spring Pliers
- Removes or replaces Bendix®, Lockheed® and other hydraulic and mechanical brake springs
- Steel hook on jaw is replaceable
- Handles provide socket type spring remover and hook end replacer
- 13 1/4" long

31-3B Replacement Hook
- Replacement hook for 131A brake spring pliers

S6118A Spring Cap Socket
- 1/4" drive double-ended socket designed for subcompact brake spring on one end and larger US cars and light trucks on the other
- Industrial finish
- Use with TM4B driver

BT19A Heavy Duty Brake Spring Tool *(Blue-Point)*
- Heavy duty design
- Remove or install import and US brake springs with or without anchor pins
- Maximum wire I.D. is 1/4", overall length is 8 7/8"

B1356E Brake Retainer Spring Tool
- For use on 3/4" retainer spring caps found on most newer vehicles

BT15 Remover
- For removing brake springs on full-size cars and pickups with drum-style brakes
- Industrial finish
- 8 15/16" long

BT17A Retainer Spring Tool
- For use on 5/8" diameter retainer springs found on most newer vehicles
- Industrial finish
- 8 15/16" long

BT10 T-Handle Brake Spring Tool
- Easily relieves tension on single spring brakes for GM vehicles
- Offers an easy way to remove single brake springs, so that brake shoes, emergency brake cables or brake cylinder can be serviced
- Hook grabs the spring while the tool point acts as a fulcrum to pry the spring free

BT20 Brake Spring Tool for Toyota® vehicles
- Special tip is designed to engage the shoe hold-down spring cup on *Toyota* vehicles
- For rear parking brake springs on 2000 – current Tacoma®, Tundra®, FJ Cruiser®, 4Runner®, Land Cruiser® and Camry®

WARNING • Read safety precautions on pages W1 to W4

BRAKE: SERVICE TOOLS

BCS70A

General Service Sets

Stock No.	Description
FA8E	1/4" Hex Driver
FA10E	5/16" Hex Driver
FA12E	3/8" Hex Driver
FAM8E	8 mm Hex Driver
FTX40E	T40 TORX® Driver
FTXB45E	T45 *TORX* Driver
FTXB50E	T50 *TORX* Driver

BTK5

Stock No.	Description
131A	Spring Pliers
B1461	Adjusting Tool
S6110A	Bleeder Wrench
S6118A	Spring Cap Socket
SGT4BR	1/4" Dr. Standard Shank Driver

BTK7A

Stock No.	Description
B1356E	Spring Tool
B1458C	Bleeder Wrench
B1461	Adjusting Tool
B3404B	Adjusting Tool
BT11	Services Bendix® brake springs
S6112	Bleeder Wrench
B1467A	Bleeder Wrench

RM130

Disc Brake Gauge and Micrometer

RM130 Rotor Micrometer (Blue-Point®)
- Range of .30"–1.3" in .001" graduations
- 3 1/2" deep frame
- Pointed anvil for checking grooves
- Includes 1" checking standard and storage case

BCS70A Disc Brake Caliper Driver Set
- For US vehicles (except Chrysler®)
- 7pc

BTK5 General Brake Service Set
- 5pc

BTK7A General Brake Service Set
- 7pc

GA3634

DG530

RG430

Disc Brake Gauges and Micrometers

GA3634 Ball Joint/Disc Brake Test Indicator Set
- All purpose indicator set
- Perfect for general use
- Indicator with 0"–1" range and .0005" graduations
- Easy-to-read white on black dial face
- Uses locking pliers and a flexible gooseneck for non-magnetic applications and difficult areas
- Ideal for brake and undercar work

CM6563450 Plastic Case
For GA3634

Brake Drum/Rotor Gauges *(Blue-Point)*

DG530 Digital Drum Gauge
- Measures automotive and heavy duty brake drums
- Pointed anvils and 4 1/4" long arms allow increased measurement accuracy and coverage
- Selectable depth stops for easier use
- Range 6"–20.65" (150 mm–515 mm): graduations are .0005" (.01 mm)

RG430 Digital Rotor Gauge
- Measures brake rotors and ball joints
- Pointed anvil and 3 1/2" long arms for increased measurement accuracy and coverage
- Selectable depth stops for easy use
- Range 0"–5.50" (0 mm–140 mm): graduations are .0005" (.01 mm)

S9523

B1468

BT4651

HSA716

BSA916

S9153B

B1462A

B3404B

B1461

S5912

S6004

Truck Brake Adjusting Tools

S9523 Brake Adjuster
- Star nut turning tool for Chevrolet® trucks with overload springs
- Different angles at each end of tool for clearance
- Blades are 17/32" wide: tool is 5 1/4" long

B1468 Brake Adjuster
- For use on GMC® and *Chevrolet* 1 1/2 and 2 ton trucks
- Tips on each end are bent 45° and then twisted 45° to allow access to brake-adjusting mechanism
- 9 1/4" long

BT4651 Heavy Truck Slack Adjuster Set
- 5/16" double square configuration
- Automatic slack adjuster tool set includes offset, reversible automatic release tool
- Release tool slides under the button of the pull-pawl on the automatic slack adjuster until fully seated while the wrench is used to adjust the brake-to-drum clearance
- Screwdriver handle for performance and comfort

HSA716 Slack Adjuster Wrench
- For brake service and slack adjuster installation on heavy duty trucks equipped with Haldex® automatic slack adjusters
- Use to turn the manual adjuster hex
- Extra deep 7/16" hex allows reach to recessed adjusters
- 14 5/8" overall length helps to overcome the anti-reverse mechanism
- Turn over to reverse
- Includes protective vinyl boot

BSA916 Slack Adjuster Wrench
- For brake service and slack adjuster installation on heavy duty trucks equipped with Bendix® automatic slack adjusters
- Use to turn the manual adjuster hex
- Extra deep 9/16" hex allows reach to recessed adjusters
- 14 1/2" overall length helps to overcome the anti-reverse mechanism
- Turn over to reverse
- Includes protective vinyl boot

Automotive Brake Adjusting Tools

S9153B Brake Adjuster
- Designed to work around obstructions on GM® vehicles
- Blades are 1/2" wide; tool is 7 7/8" long

B1462A Brake Adaptor
- For rear brakes of those cars and trucks with trailing arm bolts
- Tang at each end is set at 68°, but in opposite directions for use on left and right hand sides
- 8 1/2" long

B3404B Brake Adjuster
- For *Bendix* self-adjusting brakes and other brakes with star adjusting nut (except *Chevrolet*)
- Blades are 17/32" wide with 1/32" tip thickness
- 8 3/16" long

B1461 Brake Adaptor
- One end has a wide tang set at a 29° angle for rear brakes; other end is set at a 45° angle for front brakes
- 8 1/4" long

S5912 Brake Adjuster
- For use on VW®, Mazda®, Omni and Horizon
- Each tang tapers to a 1/4" tip width
- One tang is straight; other is offset 45°
- 8 1/2" long

S6004 Brake Adjuster
- For use on 1969 and later Toyota® when self-adjusting brakes are being dismantled
- One end is offset 15°; other is 60°
- Tapers to 1/4" tips

S6005 Brake Adjuster
- Similar to S6004
- For use on 1969 and later *Toyota* when a complete dismantling of the self-adjusting brakes is required
- One end is angled at 60°; other end features a special offset
- Each tang tapers to a 1/4" tip width
- 5 1/4" long

⚠WARNING
- Do not use "cheater bars" on handles
- Do not use chrome or industrial finish hand tools with impact drivers
- Read safety precautions on pages W1 to W4

BRAKE: SERVICE TOOLS

FTSM4E

FTSM6E

MPBS1140O

YA8610B

YA2440

GA395

YA9329A

BT350A

BTG8



Disc Brake Tools

Stock No.	Size, mm	Finish	Description	Type	A	B	C	D
FTSM4E	4	Chrome	Standard Length	Triple Square	17.2	21.6	48.5	FTSM4E2
FTSM5E	5	Chrome	Standard Length	Triple Square	17.2	21.6	48.5	FTSM5E2
FTSM6E	6	Chrome	Standard Length	Triple Square	17.2	21.6	48.5	FTSM6E2

FTSM4E Metric Triple Square Driver
Use on VW®/Audi® door handle screws 1998 and later, brake drum fasteners on *VW* Toureg® plus many other 4 mm and 5 mm triple square applications.

FTSM5E Metric Triple Square Driver
Use on *VW/Audi* door handle screws 1998 and later plus many other 4 mm and 5 mm triple square applications. Also use on 2003–2008 Porsche® Cayenne to loosen the cover on the adjustment cable for the emergency brake.

FTSM6E Metric Triple Square Driver
Various applications on European vehicles.

MPBS1140O Prybar/Brake Tool
- Strong 3/8" square alloy steel bar with straight tip
- 11" total length with 40° offset ensures access into tight wheel wells
- Large, comfortable, high visibility orange handle with striker cap allows good grip versus small, hard-to-hold brake adjustment tools
- Ideal for general prybar applications

YA8610B Universal Brake Caliper Tool Set (Blue-Point®)
- Assists in replacement of brake pads on most four-wheel disc brake cars
- Tool and adaptors position brake piston back into caliper to allow clearance for newer, thicker brake pads
- Designed for most *Audi*, Chrysler®, Ford®, GM®, Honda®, Jaguar®, Mazda®, Mini Cooper®, Mitsubishi®, Nissan®, Saturn®, Subaru®, Toyota®, *VW* and Volvo® vehicles
- Set includes one tool and six adaptors in a storage case

YA6730 Brake Caliper Tool Set *(Blue-Point)*
Combines the main body from the YA8610B set and the YA8610B-7 adaptor.

YA8610B-7 Brake Caliper Tool Adaptor
Use on *Mazda* 3 (2004 and later), *Mazda* 5 (2006 and later), *Mini Cooper* (all 2002 and later), *Volvo* S40 (2004 1/2 and later), *Volvo* V50 (2006 and later), *Volvo* C30 (2007 and later), Pontiac® Solstice (2006 and later), *Saturn* Sky (2007 and later) and *Jaguar* X type (2006 and later).

YA2440 Pad Spreader *(Blue-Point)*
For use on most US and import cars and light duty trucks with single piston disc brakes without parking brakes. Compresses the disc brake piston for easy pad installation.

GA395 Spreader *(Blue-Point)*
For standard four-piston caliper disc brakes. Frees hands to assemble caliper over rotor. 6 3/4" long.

YA9329A Piston Rotation Tool *(Blue-Point)*
- Use to rotate piston back into caliper cylinder when replacing pads
- Also rotates parking brake cylinder back into the caliper cylinder on vehicles with four-wheel disc brakes
- For 1975 and later *Ford* and Mercury® plus some import vehicles

BT350A Brake Piston Press *(Blue-Point)*
- Presses single or dual pistons most cars plus light and heavy duty trucks
- Quick and easy to use: no nuts or bolts involved in pressing operations

BTG8 Brake Pad/Shoe Gauge Set *(Blue-Point)*
- Color-coded gauges: Red indicates service required, yellow indicates caution and green indicates OK
- Constructed from 20 gauge sheet metal with durable powder-coat finish

BTCP1

BTCP500

BTCP2S

Disc Brake Tools

BTCP1 Brake Caliper Press (Blue-Point®)
- Works on both fixed and floating calipers
- Generates more than 1,600 ft-lb of force to retract the toughest caliper pistons
- Single-lever mechanism used to apply and release force for ease of operation and faster service
- Prevents damage to pistons, hubs or calipers
- Ensures parallel piston retraction on dual and quad piston calipers
- Easy left- and right-side use

BTCP500 Brake Caliper Press *(Blue-Point)*
- Works on twin and quad piston fixed calipers as well as single and twin piston floating calipers
- Centrally located ratchet evenly spreads force in a parallel manner to prevent misalignment of pistons
- Ratchet technology gives a full 360° swing
- Extended reversing lever allows for easy change from spreading to retracting

BTCP2S Brake Caliper Press
- Services vehicles with single and twin floating, twin piston fixed and quad piston fixed calipers
- High strength, lightweight polymer housing offers high impact resistance
- Large 12 mm (1/2") shaft diameter is heat-treated to prevent distortion or damage under heavy load
- Ensures parallel piston retraction to prevent damage to piston and seal
- Press plates rotate thru 180° for efficient operation on left and right brake calipers
- Drive mechanism manufactured from durable high-grade precision-cast heat-treated material
- Compression ratio of 15 to 1 provides output of 440 lb of force by just applying 28 lb of force with your hand
- Compression plates and guide bushings made from high-grade tool steel, heat-treated to ensure minimal distortion under heavy loads
- Brass inserts prevent damage at heavy load pivot points
- Rubber handle overlays provide operator comfort

B1359B

BT518

BT12

YA9070A

BT1360

BT400

TAP1

Truck Brake Tools

B1359B Brake Retainer Spring Tool
- For Chrysler® and Ford® 3/4 ton trucks equipped with Bendix® brakes
- U-shaped end is offset 30°–45° for easy removal of brake shoe to backing plate spring

BT518 Brake Shoe Tool
- For large trucks and trailers with air brakes with “S” cam design
- Provides leverage to back out brake shoe and remove roller cam
- Industrial finish

BT12 Brake Spring Tool
- Services brake shoe retracting springs on trucks using *Bendix*, Wagner® and Kelsey-Hayes® systems
- Unique shape permits access and leverage

YA9070A Rear Brake Adjusting Tool
- For single-axle Lucas-Girling brakes found on 1984 and later F-600 and larger *Ford* trucks and buses
- Has all the right angles to reach through the backing plate
- Industrial finish

BT1360 Brake Spring Tool
- Remove brake shoe retaining springs from heavy duty *Ford,* GM®, Dodge® and International® trucks
- Large, comfortable handle
- Constructed for strength and durability

Applications: *Ford*: F250®, F350®, P250, P350, P400; *GM*: 1 ton, some 1/2 ton; *Dodge*: B300, D200, D300, P200, P300; *International*: 1200 Series, 1300 Series trucks

BT400 Brake Spring Tool (Heavy Duty) *(Blue-Point)*
- For brake springs on 3/4 ton and heavier trucks
- T-Handle for generating maximum torque when encountering stiff springs
- Head may be rotated 360° to clear obstacles
- Overall length of 7 3/4"

TAP1 Truck Anchor Pin and Bushing Press
- Designed to remove brake anchor pins and bushings on 16 1/2" “Q type” S-cam tractor and trailer brake systems from Dana-Spicer®, ArvinMeritor® (Rockwell®), Eaton®, Timkin® and Fruehauf® without removing wheel hub
- Pressure pad retaining rings hold pads firmly in place
- Two-hand operation
- Interchangeable pressure pads allow removal of bushing alone or simultaneous pin/bushing removal
- Zerk grease fitting lubricates and flushes dirt from pressure screw for long life
- Designed for use with 3/4" impact guns
- Storage case

WARNING • Read safety precautions on pages W1 to W4

BRAKE: SERVICE TOOLS

S6110A

B1458C

B1463A

S6112

S6111

BBW1271

BBW1272

BBW1273

Bleeder Wrenches

S6110A Bleeder Wrench
- For GM®, Nissan® and Honda®
- 8 mm, 6-point box end; 10 mm on the other
- Ends are offset for clearance
- 192 mm long

B1460B Bleeder Wrench
- Similar to S6110A
- 3/8" box end for brake bleeding work and a 7/16" box end for brake shoe eccentric bolt adjustment
- Offset clears drag link arm and recessed backing plate on front wheel
- 9 1/2" long

B1467A Bleeder Wrench
- For *GM*, Ford® and Chrysler® vehicles
- Similar to S6110A
- 5/16" and 3/8" single hex box ends are offset for access to bleeder fittings
- 8 1/2" long

S6143 Bleeder Wrench
- For most imports
- Similar to S6110A
- 7 mm and 9 mm, 6-point box ends are offset for clearance
- 252 mm long

B1458C Bleeder Wrench
- Includes 1/4" and 3/8" single hex box ends
- 9" long

B1463A Bleeder Wrench
- 1/4"–3/8", 6-point box ends are tapered for clearance
- 3 3/4" long arms (for smaller bleeder fittings on most compact cars)

S8184 Bleeder Wrench
- For fittings on most *GM* vehicles
- Similar to B1463A
- 3/8" and 5/16", 6-point box openings
- 4" long arms

B1470 Bleeder Wrench
- Similar to B1463A
- For late model *GM* and most import vehicles
- 8 mm, 6-point box end; 10 mm on the other
- Wrench has a 90° bend for access
- Arms are approximately 100 mm long

S6112 Bleeder Wrench
- For some *GM* and Toyota® vehicles, plus select imports
- Similar to B1463A
- 8 mm, 6-point box on one end; 10 mm on the other
- Wrench has 90° bend for access
- Arms are 130 mm long

S6111 Bleeder Wrench
- Covers 90% of late-model US applications including late-model *Chrysler,* Dodge®, *Ford*, *GM,* Audi®, Mercedes® and VW® vehicles
- 10 mm and 11 mm 6-point Flank Drive® wrenching configuration
- Ends are offset for extra clearance
- 235 mm long

BBW1271 Brake Bleeder Wrench
- Special design features to accommodate caliper-mounted electromechanical parking brakes
- Designed to work without removing the wheels
- Easily access difficult-to-reach 11 mm bleeder screws

BBW1272 Brake Bleeder Wrench
- Special design features to accommodate caliper-mounted electromechanical parking brakes
- Designed to work without removing the wheels
- Easily access difficult-to-reach 11 mm bleeder screws

BBW1273 Brake Bleeder Wrench
- Special design features to accommodate caliper-mounted electromechanical parking brakes
- Designed to work without removing the wheels
- Easily access difficult-to-reach 11 mm bleeder screws

BBW1270 Brake Bleeder Wrench Set
- Special design features to accommodate caliper-mounted electromechanical parking brakes
- Designed to work without removing the wheels
- Easily access difficult-to-reach 11 mm bleeder screws
- With the varied geometry of these three wrenches, you will access most other 11 mm brake bleeder screws on all vehicle makes and models

PMP406A



Wrenches and Sockets

mm	Stock No.	A	B
6	PMP406A	17.2	25.8

PMP406A Internal Metric Pipe Plug Socket
For rear brake adjustments on 1973–1986 Subaru®.
3/8" drive, 6 mm internal square socket.

Brake/Throttle Depressor

B240B Brake and Accelerator Pedal Jack (Blue-Point®)
- Holds throttle at a constant RPM
- Easily adjusts to desired length
- Adjustment screw fine-tunes desired RPM
- Rubber tip keeps the tool firmly positioned
- Overall length of 40" (102 cm)
- Can also be used as a pedal depressor

YA2780 Brake Resetting Gauge
- Automatically sets brake shoe size when measuring against drum walls
- Positive locking section ensures an accurate reading every time
- Improved range of 6 1/2"–13 1/4"

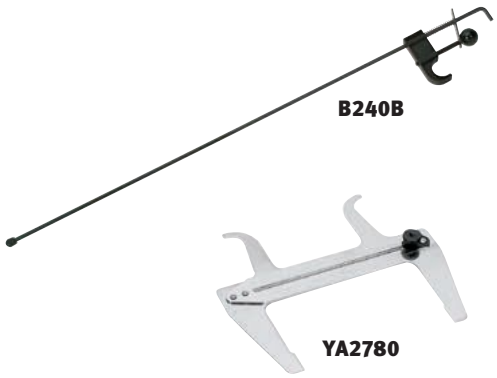

Emergency Brake *(Blue-Point)*

SIML160 6-Point Extra Deep Impact Socket
- Use to remove or replace fuel tank retaining strap nuts
- Also has applications on emergency brake adjustment nuts and stabilizer retainers
- 1/2" square drive; 1/2", 6-point wrench opening
- 5" long

SIML180 Socket
- Same design as SIML160, except hex size is 9/16"

BT22A Parking Brake Cable Tool
- Designed to remove parking brake cables from the brake backing plate and chassis mounting bracket
- Double ended tool has Ford® Escort®, Topaz® and Tempo® applications on one end while the larger end services most other vehicles

BR1 C-Ring Pliers
- Opens the C-ring on the emergency brake actuation lever when changing rear brake shoes on many domestic cars, trucks and imports

BR2 C-Ring Pliers
- Holds the C-ring without slipping during installation

3-Arm Hones and Stone Sets

CF63A 3-Arm Hone
For 3/4"–2 1/2" diameter cylinders. Adjustable thumb nut to control tension.

Stone Sets

Stock No.	Grit (Qty)	Length, inches
CF63A-100	100 (3)	1 1/8
CF63-240	240 (3)	1 1/8
CF63-400	400 (3)	1 1/8

⚠WARNING
- Operate hone only while it is within cylinder
- Do not use cheater bars on handles
- Read safety precautions on pages W1 to W4

BODY: UNIBODY AND FRAME-STRAIGHTENING EQUIPMENT

CJ107

CJ114

YA2002

CJ1200

BM175

Pullers

CJ107 Body Dent Puller
- Slide hammer action pulls out dent for filling
- "L" hook included for larger jobs
- 4 lb slide hammer

CJ114 Body Dent Puller
- Mainly for rocker, quarter, back and door panels
- Includes screw for puncturing sheet metal plus a bodyman hook and seal hook for larger jobs
- 3 lb slide hammer

YA2002 Quarter Panel Puller
- Removes dents from rear quarters and wheel wells
- Two 12" tubes (with different dimensions) fit most wheel well openings
- Use with chain attached to frame machine or portable power unit

CJ1200 Slide Hammer Puller Set
- Contains a 12 lb, contour-formed slide hammer and a variety of attachments for auto body repair work

Alignment Bar

BM175 Alignment Bar
- Use to align bumpers, window posts, wheel wells, panels, hoods, decks and brackets
- 6", 1/4" chain has hooks welded to each end for easy attachment to body components
- 4 1/2" long, 1 1/2" diameter tubing

BODY: BODY REPAIR

YA1544A

YA1545

BM101

Body Repair Kits (Blue-Point®)

YA1544A Body Repair Kit
- 4 ton capacity kit includes hydraulic unit, five "Snap-Set" extensions, spreader and a full selection of attachments for most push applications; 18pc kit includes durable storage case
- Auto pump overload system protects against damage to rams and equipment
- 1/2 ton capacity hydraulic spreader has 2" jaw and spreads from 5/8"–3 3/4"
- Flex head includes permanently-molded rubber pad
- Heavy walled extension tubes stand up to the toughest loads
- Long handle reduces required pumping effort

YA1545 Body Repair Kit
- 10 ton capacity kit includes: hydraulic unit, four extensions (4", 10", 18" and 27"), spreader and full selection of attachments in custom-fitted, rugged and wheeled storage case
- Pumps rated from 8,000–10,000 PSI
- Portable for use on the road or in the shop

Applications: Pushing, spreading and pressing of vehicle body panels as well as various component parts and assemblies

Push-Pull Jack

BM101 Push-Pull Jack
- Capable of 3,000 lb push-pull power
- Aligns, straightens and removes dents
- Multipurpose hook on jack head, plus a hook on the 55" long friction rod
- Friction rod flexes to maintain constant pressure without bending, while the grooved end prevents slipping
- Three-position handle

Hammers

BF618B Wide Nose Peen Hammer
- Bumps odd fender contours

BF632B Door Panel Hammer
- For door and body panel bumping
- Smaller diameter head is offset 45°
- Fiberglass handle

BF611B Picking and Dinging Hammer
- Smooths small dents and general dinging

BF603B Long Spot Pick Hammer
- For bumping when filing or where metal is covered with sound-proofing material

BF630B Spot Pick Hammer
- Same design as BF603B except with blunted pick end

BF604B Wide Nose Cross Peen Hammer
- For finishing and caulking

BF617B Shrinking Hammer
- Extra large faces for large area work
- Serrated for shrinking and smooth for finishing

BF614B Long Picking Hammer
- For turret and fender work

BF610B Hammer Shrinking
- Same design as BF617B except the serrated shrinking face is square
- Finishing head on other end

BF608B Short Curve Cross Peen Hammer
- Use under fenders with rolled edges: use finishing face for dinging

BF631B Cross Peen Shrinking Hammer
- Combines pick end of BF604B and serrated face of BF617B

BF635 Door Skin Hammer
- For door skin replacement
- Narrow, rectangular faces work in tight flange area
- High crown straight head with 1 5/16" radius for finishing thin sections without poking holes
- Medium crown head with 25° offset and 3 1/2" radius for working on narrow flanges against the door structure
- Fiberglass handle offers excellent balance and high strength

BF618B

BF632B

BF611B

BF603B

BF630B

BF604B

BF617B

BF614B

BF610B

BF608B

BF631B

BF635

Hammer Specifications

Stock No.	Handle Length, inches	Round Face Diameter, inches	Peen End Size, inches	Handle Length, inches	Head Weight, oz.
BF618B	12	1 9/16	3/16 x 7/8	12	12 1/2
BF632B	13	1 1/4–1 5/8	—	13	16
BF611B	12	1 15/32	—	12	8
BF603B	13	1 19/32	1/16 x 7/16	13	12 1/2
BF630B	13	1 19/32	1/4 x 7/16	13	12 1/2
BF604B	13	1 5/8	5/8	13	11 1/2
BF617B	13	1 7/8	—	13	16
BF614B	17	1 5/8	—	17	16
BF610B	13	1 7/8	—	13	16
BF608B	13	1 5/8	5/8 x 1/16	13	11 1/2
BF631B	13	1 7/8	5/8	13	11 1/2
BF635	12	1 7/16–1 5/8	5/8 x 1 1/2, 5/8 x 2	12	16

Hickory Handles

Stock No.	Length, inches	Hammers Used On
BF603-2R	13	BF603B, BF604B, BF608B, BF617B, BF610B, BF630B, BF631B, BF633, BF634
BF611-2R	12	BF611B, BF615 and BF618B
BF614-2R	17	BF614B

⚠WARNING

- Do not use chipped, mushroomed, or cracked hammers
- Strike squarely, avoid glancing blows
- Do not strike hard objects, use only for striking sheet metal
- Read safety precautions on pages W1 to W4

BODY: BODY TOOL SETS

2005BFA

2007BFB

Body Tool Sets

2005BFA Body Tool Set
- Contains CJ114 body dent puller plus BF608B and BF611B body hammers, BF716B dinging spoon and BF711B heel dolly (5pc)

2007BFB Body Tool Set
- Seven of the most common tools necessary for professional body work: BF716B spoon; BF608B, BF611B and BF617B body hammers; and BF710B, BF711B and BF712B dollies

SNIPS

CD10A

CD12A

CD16A

Tin Snips

Cut straight, circular or irregular patterns; right or left cuts.

CD7A Duckbill Snips
1 1/2" blades, 7" long.

CD10A Duckbill Snips
2 1/4" blades, 10" long.

CD12A Combination Snips
3" blades, 12" long.

CD16A Bulldog Snips
2 1/2" blades, 16" long.

AVSOS20

AVS30

Aviation Snips

- Offset blades allow cut material to flow beneath your hand without curling
- Maneuverable for angle cutting or pattern configurations
- Cuts up to 18 gauge mild steel
- Black oxide finish
- 1 1/8" cutting edge
- 9 1/2" long

AVSOSR9 Snips
Green handle. Right hand cut.

AVSOSL9 Snips
Red handle. Left hand cut.

AVSOS20 Aviation Snips Set
- Includes AVSOSR9 right hand snips and AVSOSL9 left hand snips (2pc)

AVSS10 Snips
Yellow handle. Straight cut.

AVSR10 Snips
Green handle. Right hand cut.

AVSL10 Snips
Red handle. Left hand cut.

AVS30 Aviation Snips Set
- Includes AVSR10 right hand snips, AVSL10 left hand snips and AVSS10 straight snips (3pc)

SNP2A

Light Duty and All-Purpose Snips (Blue-Point®)

SNP2A Angled Multipurpose Heavy Duty Shears
- For leather, cloth, plastic, rubber, cardboard, gasket material, rope and other materials
- Ergonomic handles can be used right or left handed; soft molded grip for comfort and control
- Blade is notched for hard wire and twine
- Locking switch ensures safety during storage
- Control switch allows blades to be held in a tighter position for easier handling
- Angled shears allow easier cutting through flat materials

SHEARS/CUTTER;

HDSCISSORS

Shears/Cutters

HDSCISSORS Heavy Duty Shop Scissors
- For leather, cloth, plastic, rubber, cardboard, gasket material, rope and many other materials
- Ergonomic handles can be used right or left handed

YA444B

Vinyl Cutter *(Blue-Point)*

YA444B Vinyl Cutter
- Cleanly cuts plastic, rubber, vinyl, upholstery, leather, hoses and rope
- Ergo® grip handle with safety lock
- Blade storage in handle
- Includes three stainless-steel replacement blades (YA444B-1)

YA444B1 Replacement Blades
- Includes three replacement blades and anvil for YA444B

Spoons

BF715B Spoon Dolly
- For caulking and forming deep pockets in doors and panels
- Head size is 2 1/2" x 1" x 3": 14" total length

BF716B Light Dinging Spoon
- Smoothes and levels ridges
- Not for prying
- Head size is 4 1/4" x 2"; 10" total length

BF715B

BF716B

Steel Dollies

B173.5 -1991 applies to all dollies.

BF707 Heel Dolly
- For use in sharp corners and wide radii
- Rubber coating provides cushioning effect
- Measures 3" x 2 1/2" x 1 1/2"

BF710B Toe Dolly
- For dinging flat surfaces
- Measures 4 3/4" x 2 1/4" x 11/16"
- 2 1/2 lb

BF711B Heel Dolly
- For use in sharp corners and wide radii
- Measures 3" x 2 1/4" x 1 3/8"; 2 1/4 lb

BF712B General Purpose Dolly
- For deep, skirted fenders and shrinking when using heat
- Measures 3" x 2 1/4" x 1 3/8"
- 2 1/4 lb

BF740 Shot Dolly
- Heavy duty leather pouch is filled with 2 1/2 lb of shot
- Essential for supporting irregular shapes and contours on doors, fenders, and other body panels
- Thin profile to get in tight areas
- Will not scratch surface; 3 3/4" W x 5 3/4" L

BF707

BF712B

BF710B

BF740

BF711B

Nib File

BF193 Nib File
- Removes unwanted paint runs, helps eliminate dribbles and drops
- Gently shaves run without digging into surface



BF193

Flexible Curved Tooth Files

14V Curved Tooth File
14", eight teeth per inch. Rough cut. Use with BF775C Handle.

14V12 Curved Tooth File
14", 12 teeth per inch. Fine cut. Use with BF775C Handle.

14V

File Handles (Blue-Point®)

- Wooden, twist-on handles with case hardened threaded steel inserts

GA616 File Handle
For 8CT curved tooth file.

GA617 File Handle
For 10CT curved tooth file.

GA618 File Handle
For 12CT curved tooth file.

BF775C Flexible File Holder
- Light and rigid with a large aluminum handle, adjustable turnbuckle and permanently attached strap

GA616

BF775C

Nut Setting/Thread Setting Kits *(Blue-Point)*

HP650 Thread Setter Kit
- Includes: rugged thread setter tool and an assortment of fractional Klik® Poly-Nuts: 12 each 8-32, 10-24, 10-32; (8) 1/4"-20 and (6) 5/16"-18 threads
- Includes required nose pieces and mandrels for setting the above sizes
- Packaged in a storage case

HP650M Metric Thread Setter Kit
- Metric version of the HP650 with metric polynuts, including 25 each 4 mm and 5 mm, (15) 6 mm and (10) 8 mm threads
- Includes thread setter tool, required nose pieces and mandrels packaged in a storage case

HP650M

WARNING
- Keep away from children
- Read safety precautions on pages W1 to W4

BODY: RIVETING AND NUT SETTING

HP200A

HP300

HPKL2

HP2

HPS202

Rivet Kits (Blue-Point®)

HP200A Riveter Kit
- Includes: HP2 rivet tool, 1/8" drill bit and 200 assorted rivets in 1/8" and 3/16" diameters plus a 120° countersink

HP300 Large Blind Rivet Kit
- Extra long 21" handled riveter includes three nosepieces
- Includes a bag of 50 Klik-Split® rivets
- Reorder quantities of *Klik-Split* and Klik-Fast® rivets are packaged 50 per bag

HPKL2 Plastic Rivet Kit
- For plastic rivets that hold fascia strips, inner fenders and other plastic parts on GM®, Ford®, Chrysler® and VW® vehicles
- Includes: rivet setter and four styles of plastic rivets: two 5 mm types, 2two 6.3 mm types

Riveting Tools *(Blue-Point)*

HP2 Rivet Tool
- Four nosepieces for 3/32"–3/16" diameter rivets
- For 1/8"–5/8" thickness
- Made of aluminum alloy

HP30N Optional Rivet Nosepiece
- Use with HP2 rivet tool to replace OEM welded studs on trim molding
- For rivets with 1/8" body diameter
- 7/32" head diameter

HPS202 Rivet Tool
- Head swivels 360° to rivet at any angle
- Fasten metal, leather, canvas and vinyl
- Sets 3/32", 1/8", 5/32" and 3/16" rivets
- Four interchangeable nosepieces store in handle when not in use

DOOR TOOLS

UTS105A

Upholstery and Trim Tools *(Blue-Point)*
- Remove door and trim panels quickly without damage
- Wide blades on door tools reduce risk of damage during panel removal
- Stainless-steel blades are heat-treated for rigidity
- Comfortable composite handles feature a contour thumb stop for maximum control

Stock No.	Description	Blade Width, inches	Overall Length, inches	Set Contains: UTS105A
UTV614A	"V" Double Step Blade Door Panel Tool	1 1/4	9 1/8	•
UTV615A	"U" Blade Door Panel Tool	1 1/4	9 1/8	•
UTV616A	"U" Blade Mini Trim Panel Tool	1/2	9	•
UTV617A	"V" Blade Mini Trim Panel Tool	1/2	9	•
UTV618A	Reverse "U" Blade Door Panel Tool	1 1/4	10	•

YA1201

YA214

YA331

Specialty Door Tools *(Blue-Point)*

YA1201 Door Panel Remover
- For *GM* and *Ford* vehicles
- Designed to prevent plastic barbed fasteners from being pulled through the panel

YA214 Door Hinge Adjuster
- Adjusts door hinge position on most vehicles
- Works on either bolted or welded hinges
- Two-headed pin adaptor allows adjustment on doors with both small and large latches
- 24" overall length

YA331 Clip Removal Tool
- Tapered forks slide under most types of auto body clips
- A squeeze of the handles pops the clips out



Soft-Grip Trim Pad Tools

- Remove fasteners that secure door panels and trim pieces without damage to panel or trim
- Soft-grip handles with contour thumb stop
- Distinct pivot point is designed for appropriate leverage and to discourage twisting that may damage panel or trim piece

Stock No.	A	B	C	Red (Set Contains: ASG103BR)	Orange (Set Contains: ASG103BO)	Green (Set Contains: ASG103BG)
ASG185BR	7/32	9/16	10	•		
ASG185BO	7/32	9/16	10		•	
ASG185BG	7/32	9/16	10			•
ASG186BR	3/8	13/16	10	•		
ASG186BO	3/8	13/16	10		•	
ASG186BG	3/8	13/16	10			•
ASG187BR	3/8	13/16	20	•		
ASG187BO	3/8	13/16	20		•	
ASG187BG	3/8	13/16	20			•
ASG188BR	7/16	13/16	10			
ASG189BR	7/16	13/16	20			
ASG190BR	3/8	13/16	20			

ASG185BR

ASG188BR

ASG186BG

ASG187BO

ASG189BR

ASG190BR

ASG103BR

Soft Grip Dished Trim Pad Tools

- Smooth dish profile and wide gap to fit vehicles utilizing conical x-mass style retainers for quick removal without damage
- Dished blade for better door panel clip and retainer contact
- Soft grip handle for comfort and control
- Chrome finish helps prevent corrosion and facilitates cleanup

Applications: Ford®, GM®, Toyota® and more

Stock No.	Opening Size, inches	Blade Width, inches	Overall Length, inches	Set Contains: ASGD102BR
ASGD1BR	7/16	13/16	10	
ASGDL1BR	7/16	13/16	20	

ASGD1BR

ASGDL1BR

Long Socket, mm

- Long sockets handle the long thread of bumper cover fasteners where deep sockets cannot
- 10mm and 11mm are the most popular fastener sizes for bumper cover bolts found on most European and US vehicles
- Flank Drive® wrenching configuration where the socket grips the fastener on the flanks/flats increasing torque by up to 15%–20%
- Manufactured from special alloy steel, precision forged and heat-treated for optimum strength and durability
- Nickel-chrome plating helps protect against corrosion and makes it easy to wipe clean

Stock No.	Description	Set Contains: 102STMML
STMML10	Socket, Metric, Long, 10 mm, 6 pt.	•
STMML11	Socket, Metric, Long, 11 mm, 6 pt.	•

102STMML

Shallow Torx with Countersink

FLCE120 *TORX* Socket with Countersink

- Use to remove/install fasteners that hold window regulators in place for BMW® 5 and 7 Series

FLCE120

⚠WARNING

- Plastic handle does not protect against shock
- Read safety precautions on pages W1 to W4

BODY: DOOR TOOLS

DPT7A

A159

A161B

A177A

A179A

S9614A

S9538A

S6103A

A181

Door Handle/Trim Pad/Trim Nuts

DPT7A Door Tool Set
- Includes the seven most needed tools for removing or replacing door trim, trim pads and handles
- Storage tray

A159 Door Handle Tool
- For most GM® cars and trucks (except Cadillac®), plus some Ford® cars
- Plastic dipped offset handle
- 10 7/8" long

A161B Trim Pad Remover
- For *GM*, *Ford* and Chrysler® vehicles
- Features a screwdriver type handle
- 7 3/4" long

A161BO Trim Pad Remover
- Orange handle, same features as A161B

A177A Trim Pad Remover
- For *GM* vehicles and most imports
- Same design as A161B except for different applications
- 7 1/2" long

A177AO Trim Pad Remover
- Orange handle, same features as A177A

A179A Trim Pad Remover
- For all *GM* door trim panels
- Curved blade helps remove plastic clips and nail type clips without damage to either the clips or the trim

S9614A Trim Nut Driver
- For *GM* vehicles
- Similar to S6103A but is for use with 5/16" internal hex trim nuts
- 1/4" drive, 1 7/8" long overall

S9538A Door Handle Tool
- For most late model *Chrysler* vehicles
- Hook end is designed for use on older style handles

S6103A Door Trim Palnut Driver
- For *Ford* and *GM* vehicles
- For easy servicing of 3/8" internal hex trim nuts used on door trim panels and molding
- 1/4" drive, 1 7/8" long overall

A181 Trim Pad Remover
- Services plastic trim fasteners on Honda®, Toyota®, Acura®, Hyundai® and some *Ford* trucks
- Similar in design to A161B. 7 1/2" long
- Not included in DPT7A set

SPECIALTY TOOLS

YA335

YA336

BF801

BF802

BF803



BF200

Body Clip Tools (Blue-Point®)

YA335 Body Clip Pliers
- Steel levers enclosed in PMS plastic to prevent scratches
- Tips have a specified angle and size that deliver the most versatile clip tool on the market
- Eliminates need to buy multiple sets of trim clip pliers for different applications
- Specially designed and patented pliers will remove any clip found on trim, bumpers, etc.

YA336 Body Clip Pliers
- Will remove almost any clip type from trim, bumpers, etc.
- Ergonomic tool with special angled tips for access to tight spaces
- Steel levers encased in glass-filled nylon for lightweight comfort
- Length: 9"; Jaw length: 1 1/2"

Suction Cups

BF801 Heavy Duty Suction Tool
- Pull out dents or handle glass
- Handle increases pulling power
- 5" suction cup

BF802 Heavy Duty Dual Suction Cup Tool
- For pulling more stubborn dents or lifting larger materials
- Handle has plenty of room for two hands
- Trigger releases both 4" cups simultaneously

BF803 Suction Cup
- Two finger grips for easy lifting, two projecting tabs for quick release
- 3 1/4" diameter

Picks/Rods

BF200 Pull Rod Set
- Drill 9/64" holes and pull metal to shape
- Includes four pull rods, two pick pulls, a straight edge and a drill bit
- Rods lift metal without distortion
- No need to remove upholstery

DHS108

DHW1

YA6620

Door Hinge Tools (Blue-Point®)

Stock No.	Description	Size	Hex Size	Length
BMAS60	Triple Square Bit	6 mm	5/16"	13/16"
BMAS80	Triple Square Bit	8 mm	5/16"	13/16"
BMAS100	Triple Square Bit	10 mm	5/16"	13/16"
BMAS120	Triple Square Bit	12 mm	5/16"	13/16"
SDMTAS30	TORX® Bit	T30	5/16	13/16"
SDMTAS40	*TORX* Bit	T40	5/16	13/16"
SDMTAS45	*TORX* Bit	T45	5/16	13/16"

DHS108 Door Hinge Removal Set
- Door hinge applications include VW®, Audi®, Jeep® Cherokee® (1997 and 1998) and early model Ford® Escort®
- Various applications on *Audi*, *VW*, and Mercedes® vehicles plus *Mercedes* rear toe adjustment and head bolts on some early models
- Set includes DHW1 ratcheting bit wrench, BMAS60–BMAS120 triple square sockets (6 mm–12 mm) and SDMTAS30–SDMTAS45 *TORX* sockets (T30–T45)
- Plastic storage pouch and bit holder included EU–GB

DHW1 Reversible Ratcheting Bit Wrench
- Overall length: 10.75" (273 mm)
- Low head clearance for access to tight spots
- Internal ring in square drive provides more secure bit retention than magnetic models

YA6620 Door Hinge Bushing Installer for GM® Vehicles
- Use on *GM* vehicles with replaceable silicon bronze door hinge bushings
- Tool provides easy access to restricted areas of the hinge
- Accurately guides and holds the bushing in place while tapping with a hammer or squeezing with pliers

Applications: Chevrolet® S10 and Sonoma (1982–2004), 1/2 and 3/4 ton trucks (1980–1999), one ton trucks (1980–2001), Blazer (1980–2005), Suburban® (1980 and later), Tahoe® (1980 and later), Astro® and Express (1980 and later) and Avalanche® (2002 and later)

LPK620

YA511

YA501F

BF272

YA520

YA610A

LOS145A

Lock Picks/Lockout Tools *(Blue-Point)*

LPK620 Master Lock Pick Set
- 37pc set includes 6pc import rocker pick set, 12pc pick set for *GM* vehicles, 5pc *Ford* automotive rocker lock pick set, 6pc Chrysler® lock pick set, 6pc set for wafer locks on import vehicles, harpoon pick for removing broken keys, tweezer type universal lock turning wrench and a gas cap pick tool

YA511 Lockout Tool Set
- Contains 17 specialized tools for unlocking car, van and truck locks
- Includes many of the components of the YA501E set plus additional service components
- Includes a penlight and instruction manual in a kit bag

YA501F Lockout Tool Set
- Contains 15 specialized tools for unlocking car, van and truck locks
- Includes J-tool for Japanese vehicles, as well as *GM* tool to service Caprice®, Buick® and Oldsmobile® vehicles
- Included *Chrysler* tool also services Toyota® Camry® vehicles
- BF272 Inflatable Wedge and instuction manual included

YA610A Lock Opening Reforming Tool
- Reforms damaged lock openings to original contour on *GM*, *Ford*, *Chrysler* and most import cars

BF272 Inflatable Wedge
- Offers safe entry in a lock-out situation without damage to the body finish
- Slip the deflated unit between door frame and body, inflate wedge by slowly applying pumping pressure to pull the door away from vehicle body
- Can also be used to gain entry by separating the weather stripping from the vehicle window or to adjust body panels

YA520 Door Lockout Kit
- Includes: Two plastic wedges to create gap between door and frame, Day-Glo® yellow easy-access jim to reach inside door handles and plastic slim jim for use on door knobs

LOS145A Door Lockout Set
- No danger of airbag activation or disconnected door linkages
- Actuate the door handle, manual lock button or electric lock button on most cars and trucks
- Includes: 4pc door unlocking tool that screws together without couplers for easy assembly and storage, plastic slim jim, two glow-in-the dark tips, two plastic wedges to create gap between door and frame without damaging door or weather stripping and BF272 Inflatable Wedge
- Use the BF272 to easily separate door from body without damage to the vehicle
- Unlocking tool features a middle extension piece to reach across the car in extended use applications
- For sale to registered locksmiths, police and bona fide repair professionals only

⚠WARNING
- Do not use "cheater bars" on handles
- Do not use chrome or industrial finish hand tools with impact drivers
- Read safety precautions on pages W1 to W4

BODY: WINDOW AND WINDSHIELD

GA243

YA109C

WK100

WK200

YA208A

A192

S9610

Window and Windshield Removal Tools

GA243 Molding Release Tool
- Use to remove window and windshield moldings on cemented glass

YA109C Windshield Removal Tool (Blue Point®)
- Steel cable pull handle
- Replaceable steel cutting blades can be resharpened
- For GM®, Chrysler® vehicles and other cars with windshields set in place with sealant

WK100 Windshield Knife *(Blue Point)*
- Cuts hardened urethane down to the dash
- Flush blade retention screw helps prevent damage to the dash and moldings
- Rigid aluminum shaft will not flex
- Long length provides cutting leverage and reach
- Cushion grip handle for extra comfort
- Includes one blade
- Uses YA1860 replacement blades
- 18" long

WK200 Windshield Knife *(Blue Point)*
- Cuts hardened urethane down to the dash
- Flush blade retention screw helps prevent damage to the dash and moldings
- Rigid aluminum shaft will not flex
- Long length provides cutting leverage and reach
- Vinyl grip handle for extra comfort
- Includes one blade
- 24" long
- Uses YA1860 replacement blades

YA208A Windshield Locking Strip Installation Tool
- Wedge openings in two widths make short work of installing nearly all locking strips
- Includes special tip for Dodge® truck applications
- 4" contoured handle and 4" metal shank

A192 Windshield Wiper Arm Removal Tool
- Easily remove wiper arms on most vehicles
- Both wide and narrow prying ends
- Do not use on wiper arms bolted to the shaft

S9610 Window Sash Nut Spanner Socket
- 3/8" drive and 15/32" long
- For *GM* and *Chrysler* cars and light trucks

YA5200A

WSC2

PKNG90

YA6390

Window Scrapers (Blue-Point®)

YA5200A Razor Blade Scraper
- Unique shape fits into tight spots such as the area between dash and windshield
- Use any standard, single-edge razor blade
- Storage for extra blades in screwdriver style handle. 11" long

WSC2 Plastic Blade Window Scraper
- Scrapes windows, windshields and more
- Includes a plastic blade, or use any standard, single-edge razor blade
- 8" long tool folds to only 4 5/8"

PKNG90 Glass/Acrylic Large Scraper
- Designed for use on glass and acrylic surfaces
- Large handle for easy grip
- Orange color to visually identify difference from black nylon glass-filled products
- Works well when removing dirt/debris, windshield decals, adhesive mounts for mirrors, dealer sticker removal, tree sap, algae removal from fiberglass boats, and removal of window tinting

Window Holder *(Blue-Point)*

YA6390 Window Holder
- Holds side window glass up when working on the regulator
- Suction cups are attached to both sides of the glass with a cable over the door frame, preventing the glass from falling down the door

BF185A

BF190



BF192A

BF195

Sanding (Blue-Point®)

BF185A Sanding Block
- For flat or curved surfaces with wet or dry sandpaper
- 5 x 2 3/4"

BF189A Sanding Block
- For flat or curved surfaces with wet or dry sandpaper
- 5 x 2 3/4"

BF190 Sanding Block
- All-purpose, multi-radius edge and flat sander
- Flexible body conforms to most sanding surfaces
- 5 1/2" long

BF192A Sanding Block
- Double sided, wet/dry sanding block
- Soft side sands irregular surfaces
- Stiff side sands flat and curved surfaces

BF195 Sanding Block
- Multi-purpose, radius, groove-angle and corner sander
- Flexible body conforms to most surfaces; 5 1/2" long

BFS1000B

YAUVWATER

NYZ7007HD

Bumper Cover Paint Stands

BFS1000B Bumper Cover Painting Stand
- Stand holds the bumper cover securely for painting
- Five different locking positions on the stand and full 90° rotation provide maximum versatility
- Lightweight at 23 lb and compact to store
- Casters provide full mobility

Water Body Dye

YAUVWATER Water Body Dye
- Ideal for use by auto body and glass repair shops
- Fluorescent dye easily detects gaps causing wind noise plus leaks around sunroofs, door trim, trunk lids, window seals and windshields
- Simply mix bottled dye with water and spray over outer area
- Check for leaks with UV lamp
- Easily cleaned off with water after repair
- Recommended for use with ACTUVLITEA UV light kit

Mastic Removal Tools

NYZ7007HD Manual Mastic Removal Kit
- Hand kit is ideal for aviation, automotive and industrial use, especially for delicate jobs and limited access scraping applications
- NYROC® blades are sharpened with sandpaper, small stone or optional pneumatic sharpener
- Kit includes six 1" *NYROC* blades, six 1/2" *NYROC* blades, three 1/4" *NYROC* blades and ergonomic rubber handle

WARNING • Read safety precautions on pages W1 to W4

BODY: ANTENNA/MIRROR

YA7575

RRT105

S8703

S9605B

Mirror and Radio Trim Sockets

YA7575 Radio Removal Tool for Ford® Vehicles (Blue-Point®)
- Insert tool components into holes on the radio faceplate to release the retaining clips on the radio
- Same as *Ford* No. T87P-19061-A

Applications: 1987 and later Mustang®, 1988 and later Tempo®/Topaz®, 1989 and later Continental®, 1990 and later Taurus®/Sable®, Ranger® Bronco® II, Probe®, Lincoln® Town Car, Mark VII®, Crown Victoria®/Grand Marquis, Thunderbird®/Cougar, F-Series pickups, E-Series vans, 1991 and later Explorer® and 1995 and later Windstar® vehicles

RRT105 Car Stereo Removal Tool Kit
- Includes: Six tools for car stereo removal
- Enclosed instruction sheet lists exact model application for each manufacturer
- EU–GB

Applications: Audi®, BMW®, *Ford*, Land Rover®, *Lincoln*, Mazda®, Mercedes®, Mercury®, Merkur®, Porsche®, Saab® and VW®

S8703 Remote Control Mirror Socket
- Hollow socket clears adjustment lever; two-prong socket has a 3/8" square drive
- 19/32" diameter on drive end; 21/32" diameter on socket end
- 2 1/16" long
- Nickel-chrome finish
- Services many *Ford* and *VW* vehicles

S9605B Radio Trim Nut Socket
Similar in appearance and function to S8703. 1/4" square drive. 7/16" diameter on drive end; 9/16" diameter on socket end. 2 5/16" long. Services some GM® and *Ford* vehicles.

S6166

2160ANT

Antenna Nut Tools

S6166 Antenna Nut Socket
- Three-prong socket with 11/16" external hex
- 3/4" diameter, 1 1/2" long
- Services 1987 later Chrysler® vehicles

2160ANT Antenna Wrench *(Blue-Point)*
- Four configurations will fit most antenna bezel nuts on US and imported vehicles
- 10 mm opening for removing mast-type antennas
- Measures 7 1/4" x 1 1/2" x 1/8"
- Anodized finish

Spot Weld Cutters (Blue-Point®)

SWDK4 Spot Weld Cutter Set
- 4pc cutter set designed for high-speed cutting of up to 2,000 RPM
- Self-centering points minimize walking

SWDK412 Spot Weld Cutter
1/2"

SWDK414 Spot Weld Cutter
1/4"

SWDK438 Spot Weld Cutter
3/8"

SWDK4516 Spot Weld Cutter
5/16"

SWDK4

Infrared Curing Light

BFLIGHT1500A Infrared Curing Lamp (120V AC)
- Use to cure paint, primer, body filler, bonding adhesive and plastic repair products
- Adjustable lamp height and pivot
- Four swivel casters for easy maneuverability
- UL® listed

Cure times at 18" from surface:
10 minutes – 2 K primers,
waterborn base coat, filler/stoppers
15 minutes – 2 K plastic repair,
plastic body fillers, acrylic enamels
30 minutes – 2K top coats,
high build primers, structural adhesives
35 minutes – polyurethane,
synthetic enamels, high solids clear

BFLIGHT1500A

ET1400 Heat Gun
- Variable temperature selection
- *UL*/CSA® listed
- Up to 1,050 °F with three-way switch

ET1400

HEADLAMP AIMING

Headlamp Spring Tool

HE52B Headlamp Spring Tool
- For servicing alignment springs
- 3/16" diameter shank anchored in a screwdriver-style handle
- 7" long

HE52B

Headlamp Adjuster

RBYF445 Ratcheting Headlight Wrench
- 8" overall length allows access to headlight adjustment screws Applications work on most late-model Ford® vehicles with 4 mm and 4.5 mm adjusters (found on aerodynamic designs) and headlights with rear mount adjusters

RBYF445

⚠WARNING • Read safety precautions on pages W1 to W4

PAINT SPRAY: SPRAY GUNS

A new generation of Blue-Point® spray guns for primer, base and clear coat. Designed for the automotive refinishing painter. Lightweight and well-balanced while delivering a quality, first-class automotive finish. Lowest trigger pull among guns in its class.

Unmatched spray pattern size and quality repair kits. Optional interchangeable 125, 250 and 600 cc aluminum cups are available. Optional 3M® PPS adaptor is available. Full one-year warranty.

BLP13HVLP

BLP14HVLP

BLP15HVLP

BLP18HVLP

BLP10MHVLP

Full Size/Miniature – HVLP

Stock No.	Fluid Tip, mm	Air Consumption, SCFM	Max. Inlet HVLP PSI (bar, kPa)	Dry Weight without Cup, oz (grams)	Air Inlet Thread Size, NPSM	Cup Size, cc	Application
BLP13HVLP	1.3	9.5	29 (2.0, 200)	12.6 (359)	1/4"	600	High solids, colors and clears
BLP14HVLP	1.4	9.5	29 (2.0, 200)	12.6 (359)	1/4"	600	High solids, colors and clears
BLP15HVLP	1.5	9.5	29 (2.0, 200)	12.6 (359)	1/4"	600	Medium solids, colors and clears
BLP18HVLP	1.8	9.5	29 (2.0, 200)	12.6 (359)	1/4"	600	Primer, high viscosity materials
BLP10MHVLP	1.0	7.0	29 (20, 200)	11.4 (322)	1/4"	125	Primer, base and clear

BLPK14HVLP

Economy – HVLP

Stock No.	Fluid Tip, mm	Air Consumption, SCFM	Air Inlet Thread Size, NPSM	Air Pressure Range, PSI	Fluid (Water) Delivery	Cup Size, cc
BLPK14HVLP	1.4	14.5	1/4"	30–43 PSI	190–250 mL/min	600

BLP14CONV

Full Size – Conventional (non-HVLP)

Stock No.	Fluid Tip, mm	Air consumption, SCFM	Max. Inlet HVLP psi (bar, kPa)	Dry Weight without Cup, oz (grams)	Air Inlet Thread Size, NPSM	Cup Size, cc	Application
BLP14CONV	1.4	9.5	—	12.6 (359)	1.4"	600	All automotive colors and clears

SPRAY GUN ACCESSORIES

BF7130

Air/Fluid Hoses

BF7220 Fluid Hose
25' x 3/8" I.D. fluid hose with 3/8" FPT connectors.

BF7130 Air/Fluid Hose Kit
- 6' hose kit for the BF652 pressure cup
- Kit includes 5/16" I.D. air hose with 1/4" FPT connectors and 1/4" I.D. fluid hose with 3/8" FPT connectors

Air Caps and Service Kits

BF16111 Air Cap
General duty cap (red ring).

BF16113 Air Cap
Clear coat cap (gold ring).

BF16114 Air Cap
Material organizer cap (blue ring).

BF501RK Service Kit
For BF501 spray guns.

BF590RK Service Kit
For BF590 spray guns.

BF7505

Gravity Feed Cup

BF7505 Aluminum Miniature Gravity Feed Cup
- 4 oz (125 cc) capacity
- Miniature aluminum gravity feed cup
- Includes adaptor to fit *Blue-Point* HVLP gravity feed spray guns

BF521A

BF520A

BF530A

BF540A

Air Filters/Air Control Units

BF521A Air Control Unit
- Includes regulator with 160 PSI inverted gauge and air cock
- Two regulated outlets
- One filtered main line outlet
- Air Inlet: 1/2" NPT(f). Filter Capacity: 75 CFM
- Regulator capacity: 50 CFM

BF520A Air Filter
- Reusable edge type 5 micron filter element
- Highly effective at removing water, oil and other contamination
- Air Inlet: 1/2" FPT Air Outlets: 3/8" FPT and 1/4" FPT (plugged). Filter Capacity: 75 CFM

BF530A Air Filter
- Reusable edge type 5 micron filter element
- Highly effective at removing water, oil and other contamination
- Air Inlet: 1/2" FPT Air Outlet: two outlets @ 3/8" FPT
- Filter Capacity: 120 CFM

BF540A Mechanic's Air Filter
- Portable, mounts easily anywhere
- Designed for use with quick couplers
- Air Inlet: 1/4" FPT Air Outlets: 1/4" FPT and 1/4" FPT (plugged). Filter Capacity: 75 CFM

BF525

BF555

BF550

BF1210

BF7000

Air Valves/Air Regulators

BF525 Air Pressure Regulator
- Two regulated outlets
- Includes 160 PSI air gauge and air cock (1/4" MPT)
- Capacity: 50 CFM

BF555 Air Adjusting Valve (with Gauge)
- Designed for use with HVLP spray guns
- Includes 160 PSI pressure gauge
- Air Inlet: 1/4" MPT Air Outlet: 1/4" FPT (swivel nut)

BF550 Air Adjusting Valve
- Precision-tapered valve
- Full open to close with approximately four turns: infinitely adjustable
- Large, easy-to-handle Inlet: 1/4" MPT Air Outlet: 1/4" FPT (swivel nut)

BF1210 "Green Zone" Air Regulator
- Reads both inlet pressure and air cap pressures

BF7000 Disposable InLine Filter
- Disposable filter removes contaminants that condense in the air hose between wall-mounted filter and spray gun
- Reduces paint defects
- Easy installation
- Card of two filters

Air Pressure Regulators

BF1410 Air Pressure Regulator
- Small, lightweight, true diaphragm mini regulator attaches to any spray gun (including HVLP models) for accurate air pressure lation
- Push/Pull lock pressure setting
- Features easy-to-read 0–160 PSI gauge
- Capacity of 22 CFM (158 SCFM) [623 L/min]

YA999 Air/Water Separator (Blue-Point®)
- Separates water from compressed air
- Includes drain valve for periodic draining
- 3 1/2" L. 1 1/2" diameter

BF1410

YA999

⚠WARNING

- Use in well ventilated area
- Read safety precautions on pages W1 to W4

PAINT SPRAY: SPRAY GUN ACCESSORIES

AHCC90C

AHCCP90C

High-Volume Hose Connectors

AHCC90C Quick Coupler
- High-volume 1/4" female quick coupler
- Designed to deliver high volumes of air to spray guns and air tools

AHCC91C Quick Coupler
- High-volume 1/4" male quick coupler
- Designed to deliver high volumes of air to spray guns and air tools

AHCCP90C Impact Wrench Coupler
- Quick connect 1/4" female nipple
- Designed to deliver high volumes of air to spray guns and air tools

AHCCP97C Impact Wrench Adaptor
- Use with AHCC98C high-flow coupler to improve low-pressure performance of 1/2" drive impact wrenches and other high air consumption tools

MRB20

Paint Gun Hooks / Holders

MRB20 Magnetic Paint Gun Hook
- Eliminates having to drill holes in your paint booth to hang your paint gun
- 160 lb of magnetic force

BF9893 Spray Gun Holder
- Stand holds up to three gravity feed paint spray guns at one time for refilling
- Adjustable strainer holder
- Steel construction

BF9893

AIR BRUSHING

BF180B

BF180B Air Compressor
- Portable 1/10 HP oil-less diaphragm type compressor features internal bleed
- Compact, lightweight and quiet
- Maximum running pressure of 33 PSI 115V, 60Hz, 2.5A

BF170A

BF170A Airbrush Set
- Dual action, internal mix, bottom feed airbrush
- Single needle/nozzle design sprays a variety of reduced acrylics, enamels, lacquers, glazes and airbrush-ready paints
- Excellent choice for multiple applications
- Includes: airbrush, mixing jars, air hose, color cup, extra needle and instruction manual

BF360

BF360 Airbrush Set
- Rotating paint reservoir allows gravity or bottom feed
- Engineered to require only one size tip, regulator and needle for application of any properly reduced medium including acrylics gouache, inks, dyes, enamels, lacquers and stains
- Includes: airbrush, two 2 oz jars, one 3/4 oz jar, 6' braided hose, extra needle and tip, plus foam lined storage case

BF171

BF171 Airbrush Set
- Single action, external mix, bottom feed airbrush
- Air and paint mix outside the airbrush, creating a larger, coarser dot pattern while providing a heavier spray volume
- For base coating, touch-up projects and automotive painters
- Sprays higher viscosity materials like glazes, stains, enamels and lacquers
- Includes: airbrush, mixing jars, air hose and instructions

BF175TA

BF175TA Airbrush Set
- Dual action, internal mix, bottom feed airbrush
- Choice of fine, medium or heavy needle/heads
- Sprays a wide range of properly reduced acrylics, enamels, lacquers, glazes and airbrush ready paints
- Includes: airbrush, mixing jars, air hose, color cup, extra tip, spray regulator, needle and instruction manual in a storage case

BF105

BF105 Gravity Feed Airbrush Set
- Ideal for graphic arts and automotive illustration
- Dual action, internal mix, gravity feed airbrush for professional results
- Precise performance for tight line detail
- Single needle, single tip configuration
- 1/3 oz permanently mounted color cup
- Sprays any properly reduced paints
- Operates with lower pressure
- 10–15 PSI
- Optional needle, regulator and tip availabte a finer spray
- Ergonomically balanced for hours of comfortable spraying

PAINT SPRAY: PAINT GUN CLEANERS/SAFETY EQUIPMENT

Cabinet Style Paint Gun Cleaner

PGC500A Paint Gun Cleaner

PGC500A

- Cleans paint guns in less than two minutes
- Meets SCAQMD air quality rule 1171
- Air safety switch on lid
- Features a high torque rotary vane air motor that requires only 7 CFM at 60 PSI
- Regulator and gauge are included
- Seal-less magnetic drive pump supplies powerful cleaning action, no seals to wear out or replace
- Sprays solvent at 85 PSI
- Reduces solvent consumption up to 90%
- Measures 30" H, 26" L and 24" W in the top

Paint Gun Cleaning Brushes (Blue-Point®)

YA7327 Paint Gun Cleaning Brush (Set of 5)

YA7327

- For "external" paint guns
- Can be used with commonly used cleaning solvents (do not use with solvents marked "corrosive")
- Nylon bristles
- 7 1/2" L

YA7329 Paint Gun Cleaning Brush (Set of 5)

- Similar to YA7327 but designed for "fluid tip" paint guns
- 7 3/4" L

BFCB101 Paint Gun Cleaning Brush Kit

BFCB101

- General purpose spray gun cleaning kit
- Includes 7pc stainless-steel needle set with handle, 5pc precision mini-twisted brush set, 3/8" pick-up tube brush (12" L), 3/16" nylon end brush, 1/2" nylon body cavity brush, nylon bristle exterior body brush and 1/4" nylon HVLP brush

Flammables Storage Cabinet

EQFSC45M Flammables Storage Cabinet

- Store volatile liquids like paints, solvents, alcohol, acetone, gasoline and other chemicals
- 16 gauge walls with full 2" air walls. 45 gallon capacity with 5 gallon spill pan
- Removable fork lift channels for convenient movement and placement of cabinet
- Complies with OSHA #29 CFR 1910, NFPA Code #30 and UFC Code #79
- Spill containment exceeds 5 gallon EPA requirement

Specifications	Outside Height	Outside Width	Outside Depth	Inside Height	Inside Width	Inside Depth
EQFSC45M	65"	43"	18"	60"	40"	15"

EQFSC45M

ABRASIVE BLAST SYSTEMS: PORTABLE PRESSURE BLAST SYSTEMS

Air Powered Portable Pressure Blast Systems

YA441 Pressure Blast System

- For cleaning jobs on large surface areas
- Cleans a variety of materials such as concrete, stone, brick and steel
- Unit has a convenient remote control shut down at nozzle handle
- Wheels provide mobility on job site
- Hose length 25', with 1/4" nozzle
- Capacity: 250 lb of abrasive
- Requires 80 CFM at 100 PSI

YA449A Pressure Blast System (Not Shown)

- Cleans a variety of materials such as concrete, stone, brick and steel
- Media is controlled by stainless-steel ball valve at nozzle handle
- Capacity: 100 lb of abrasive
- Requires 21 CFM at 100 PSI
- Hose length 10' with 1/8" nozzle

YA448 Pressure Blaster System

- For cleaning jobs where a minimal capacity of media is required
- Cleans a variety of materials such as concrete, stone, brick and steel
- Media is controlled by stainless-steel ball valve at nozzle handle
- Capacity: 40 lb of abrasive
- Requires 21 CFM at 100 PSI
- Hose length 8' with 1/8" nozzle

YA441
YA448
YA432

Gravity Fed Portable Pressure Blast Systems

YA432 Gravity Feed Siphon Sandblast System

- Portable design is ideal for quick spot cleanups or larger jobs such as body and frame restorations
- Capacity: 40 lb of abrasive
- Hose length 10' with 5/16" nozzle
- Requires 10–18 CFM at 100 PSI

⚠WARNING

- Do not direct air or fluid stream at body
- Use in well ventilated area
- Do not expose solvent to flames, sparks or other source of ignition
- Read safety precaution on pages W1 to W4

ABRASIVE BLAST SYSTEMS: CABINET-TYPE

Snap-on® abrasive blast systems effectively clean metal parts right down to the bare substrate. The applications vary from automotive, manufacturing, restoration to tool and die shops, marine repair and electric motor rebuilders. Cabinet sizes vary from medium sized to larger pressure-fed systems.

YA3825

YA3825PJJ

YA3825PJK

YA3626

YA4826PA

Clamshell Blast Cabinet

- Features a clamshell lid to assist in loading heavy parts
- Side door for loading smaller parts
- Variable output blast gun with trigger-style control
- High efficiency 135 CFM dust collection system
- Provides user excellent visibility during blasting
- Separates dust from useable media, minimizing waste
- Lower noise output
- Heavy duty steel grating in work area for heavier parts
- Dual fluorescent lights in work area for increased visibility
- Includes 25 lb of glass bead abrasive

Stock No.	YA3825	YA3626*	YA4826PA
Inside Dimensions, inches	16–24 H x 37 1/2 W x 26 D	23 H x 35 1/2 W x 23 1/2 D	14–23 H x 48 W x 24 D
Side Door Dimensions, inches	12 H x 17 1/2 W	12 H x 18 W	13 H x 19 W
Top Opening Dimensions, inches	25 H x 37 1/2 W	14 H x 37 W	24 H x 48 W
Overall Dimensions, inches	70 H x 38 W x 26 D	58 H x 36 W x 24 D	60 H x 52 W x 25 D
Dust Collection Size in CFM	135	100	160
Electrical Requirements	120V AC, 60Hz	120V AC, 60Hz	120V AC, 60Hz
European Models	YAH3825EUR†	–	–

NOTE: European model is 230V AC, 50/60 Hz, Single Phase.
*Blue-Point®
CE

YA4224

YA435

YA437

Industrial Style Blast Cabinets

- Dust collection system provides user with excellent visibility and features polysateen bags to capture dust and debris
- Dual fluorescent lights in work area for increased visibility
- Heavy duty steel grating in work area to support heavier parts

Stock No.	Inside Dimensions, inches	Dust Collector Size, CFM	Side Door Dimensions, inches	Top Opening Dimensions, inches	Overall Dimensions, inches	Air Supply Required	Electrical Requirements	European Models
YA4224	29 H x 41 W x 23 D	135	17 H x 18 W	12 H x 39 1/2 W	73 H x 43 W x 24 D	25 CFM at 100 PSI	120V AC, 60Hz	YAH4224EUR†
YA435	15 to 23 H x 40 W x 26 D	270	13 H x 17 W	39 x 24	66 H x 40 W x 27 D	18 CFM at 100 PSI	120V AC, 60Hz	YAH435-EUR†
YA437	33 H x 42 1/2 W x 44 D	405	35 H x 42 W	—	78 H x 44 W x 44 D	25 CFM at 100 PSI	120V AC, 60Hz	YAH437-EUR†

NOTE: European models are 230V AC, 50/60 Hz, single phase.

TECHNICAL SUPPORT 1-800-253-3661

†CE

YA4224 Abrasive Blast Cabinet with Foot Control

- Right hand door for smaller parts and top-opening lid for larger parts
- Foot pedal control for media delivery reduces operator fatigue

YA435 Abrasive Blast Cabinet

- Right hand door for smaller parts and full front opening door for larger parts
- Variable output blast gun with trigger style control

YA437 Large Abrasive Blast Cabinet with Foot Control

- Features a turntable to assist in cleaning larger or multiple parts easily
- Right and left hand doors allow access to turntable
- Foot pedal control for media delivery reduces operator fatigue

SANDBLASTERS

Vacuum Sandblaster

YA428A Vacuum Sandblaster

- Blasts away rust, dirt and paint quickly
- Features a vacuum recovery system at the blast nozzle to eliminate mess
- Media is recycled for continuous use
- Dust is captured in container for ease of disposal
- Wheels and casters offer ease in mobility
- Vacuum recovery system's 90 CFM
- Measures 49" x 18" x 18 1/2"
- Requires 14 CFM at 100 PSI and 120V AC 60 Hz
- European model: YAH428AEUR 230V AC 50/60Hz

YA428A

Small Sandblaster

PSB500AR Portable Sandblasting Gun

- For cleaning small areas quickly
- Lightweight aluminum construction
- Flat base provides an upright resting position
- Media capacity 4 lb
- Requires 5–12 CFM at 100 PSI

PSB500AR

WARNING

- Use in well ventilated area
- Read safety precautions on pages W1 to W4

ABRASIVE BLAST SYSTEMS: SANDBLASTING ACCESSORIES

YAD100A

YAD10102A

YAD007A

Blast System Accessories

Stock No.	Nozzle	Air Jets	Blast Gun	Blast Gloves	Window Film Replacement	Replacement Filter
YA3626	YAD105	YAD104	YAD100A	YAD007A	YAD20061	YAD723A
YA4826PA	YAD2304	–	–	YAD007A	YAD20061	YADV723A
YA3825	YAD105	YAD104	YAD100A	YAD007A	YAD20061	YAD714
YA3825PJJ	YAD105	YAD104	YAD100A	YAD007A	YAD20061	YAD714
YA3825PJK	YAD105	YAD104	YAD100A	YAD007A	YAD20061	YAD714
YA4224	YAD10104A	YAD10105A	YAD10102A	YAD007A	YAD20061	YAD674
YA3423	YAD105	YAD104	YAD100A	YAD007A	YAD20061	YAD714
YA435	YAD115	YAD104	YAD100A	YAD007A	YAD20061	YAD019
YA437	YAD10104A	YAD10105A	YAD10102A	YAD007A	YAD20061	YAD018
YA3220	YAD105	YAD104	YAD100A	YAD007A	YAD20061	N/A

YAD4000

YAD4003

YA428-1

YA462A

YA466A

Abrasives

YAD4000 Steel Grit Abrasive
For rough cleaning and removing rust and scale. 50 lb bucket.

YAD4003 Steel Shot Abrasive
For peening and cleaning castings and forgings. 50 lb bucket.

YA428-1 C-Garnet Abrasive
Does not break down as quickly as silica sand. Creates less dust. 50 lb bucket.

YA461A Glass Bead Abrasive (Coarse)
For coarse satin finish with minimum surface removal. 40–60 coarse grit, 50 lb bucket.

YA462A Glass Bead Abrasive (Medium)
For medium satin finish with minimum surface removal. 60–100 medium grit, 50 lb bucket.

YA463A Glass Bead Abrasive (Fine)
Use for fine satin finish with minimum surface removal. 100–200 fine grit, 50 lb bucket.

YA466A Aluminum Oxide Abrasive
A tough abrasive used for fast removal of heavy oxidation and burrs. Low dust formula. 50 lb bucket.

YA415A

Helmet/Hood

YA415A Cotton Twill Hood

- Bump Cap protects head, face and neck from dust
- Light duty protector for well ventilated areas

WV1560VIS

High Visibility Safety Vises

- Coated in high visibility yellow, which conforms to the OSHA safety color standard for physical hazards regulation #1910.144
- Powder-coat finish resists scratches and gives a tough, durable finish
- Handles and lockdowns are black oxide-coated for additional corrosion resistance
- Units feature a straight line design with totally enclosed spindle and nut, replacement pipe and serrated vise jaws
- 360° swivel base

Stock No.	Jaw Width, inches	Maximum Opening, inches	Pipe Capacity, inches
WV1550VIS	5	5 1/4	1/4–2 1/2
WV1560VIS	6	5 3/4	1/4–3 1/2

WV1745

WV4044

Mechanic's Vises

- For general purpose service and maintenance shops
- Replaceable, reversible top jaws (one serrated steel, one smooth), built-in pipe jaws, swivel base and large anvil

Stock No.	Jaw Width, inches	Maximum Opening, inches	Pipe Capacity, inches	Throat Depth, inches	Copper Jaw Cap
WV1745	4 1/2	4	3 1/4	3	WV4044
WV1755	5 1/2	5	3/8–3	3 3/4	WV4045
WV1765	6 1/2	6 1/2	3/8–3 1/2	4	WV4046
WV1780A	8	7	1/8–3 1/2	4 3/4	WV4046

Machinist's Vises *(Blue-Point)*

- Choice of swivel or non-swivel base
- Large anvil, totally enclosed spindle and nut
- 60,000 PSI high ductile iron for main stress parts
- Swivel models feature slip-proof 360° base, serrated teeth and double lockdowns

Stock No.	Jaw Width, inches	Maximum Opening, inches	Throat Depth, inches	Base
WV300N	3	4 3/4	2 5/8	Stationary
WV400N	4	6 1/2	3 1/2	Stationary
WV450N	4 1/2	7 1/2	4	Stationary
WV500N	5	8	4 1/4	Stationary
WV600N	6	10	5 1/2	Stationary
WV800N	8	12	5 13/16	Stationary
WV300S	3	4 3/4	2 5/8	Swivel
WV350S	3 1/2	5 1/4	2 3/4	Swivel
WV400S	4	6 1/2	3 1/2	Swivel
WV450S	4 1/2	7 1/2	4	Swivel
WV500S	5	8	4 1/4	Swivel
WV600S	6	10	5 1/2	Swivel
WV800S	8	12	5 13/16	Swivel



WV676

Utility Vises

- Regular duty utility vises can be used for a variety of shop applications
- Replaceable serrated jaws, built-in pipe jaws, swivel base and large anvil to handle a variety of jobs

Stock No.	Jaw Width, inches	Maximum Opening, inches	Pipe Capacity, inches	Throat Depth, inches
WV674*	4 1/2	3 3/4	1/8–2	2 5/8
WV675	5 1/2	4 3/4	1/8–2	3 7/16
WV676	6 1/2	5 3/4	1/8–2 1/2	3 11/16
WV656	6	6	1/8–3	4 1/4
WV648*	8	7 1/2	1/8–3	4 1/2

*Features built-in pipe jaws, replaceable steel vise jaw inserts, a locking swivel base and rugged 30,000 PSI body casting.

WVC2

Pipe and Bench Vises (Blue-Point®)

- Large anvil, totally enclosed spindle and nut
- 60,000 PSI high ductile iron for main stress parts
- Replaceable steel vise jaw inserts and milled steel pipe jaws
- Alloy steel slide bar

Stock No.	Jaw Width, inches	Maximum Opening, inches	Pipe Capacity, inches	Throat Depth, inches
WVC0	3 1/2	4	1/8–2 1/2	4 1/2
WVC2	5	7	1/8–4 1/2	5 5/16
WVC3	6	9	3/8–6	6 5/8

WV400N

WV400S

⚠WARNING

- Keep away from children
- Read safety precautions on pages W1 to W4

VISES

WVE105RT

Forged Bench Vises (Blue-Point®)

- Hardened reversible jaws can be reversed for non-marring applications or replaced when worn
- Competitive forged units do not offer replaceable jaws
- 360° swivel base increases versatility because vise can be locked in virtually any position
- Jaw adjustment screws ensure proper alignment and accuracy

Stock No.	Jaw Width, inches	Maximum Opening, inches	Pipe Capacity, inches
WVE104RT	4	3 15/16	1/4–3/4
WVE105RT	5	5 7/8	1/2–2 1/2
WVE106RT	6	7 7/8	1/2–3
WVE107RT	7	8 7/8	3/4–4

BLPMV5

Bench Vises (Blue-Point®)

- Single piece steel blocks for higher load capacity
- Extended anvil
- Lubrication points for maintenance
- Swivel base
- Capacity range from 3.5–9 ton at maximum opening
- Reinforced cantilever support
- Interchangeable jaws
- Diamond ground for better grip
- Heavy duty cast iron construction
- Precise jaw alignment
- Rolled thread spindle for easy locating and tightening parts
- Protected spindle

Stock No.	Jaw Width, inches
BLPMV4	4
BLPMV5	5
BLPMV6	6

WVA4

WVF4

WVP4

WVR4

Jaw Caps

WVA Series. Aluminum grooved caps hold uneven and circular pieces.

WVF Series. Caps with heat-resistant, laminated fibers help prevent outside materials from being absorbed.

WVP Series. Prism caps have horizontal and vertical grooves for marking out, center punching, light tapping and thread cutting.

WVR Series. Caps have rubber covers.

Stock No.	Description	Size, inches
WVA4	Aluminum Alloy Face	4
WVA5	Aluminum Alloy Face	5
WVA6	Aluminum Alloy Face	6
WVF4	Fiber Face	4
WVF5	Fiber Face	5
WVF6	Fiber Face	6
WVP4	Prism Face	4
WVP5	Prism Face	5
WVP6	Prism Face	6
WVR4	Rubber Face	4
WVR5	Rubber Face	5
WVR6	Rubber Face	6

C-CLAMPS

CL537A

Medium Duty C-Clamps

- Maximum strength ribbed iron frame
- Steel screw with full standard threads and sliding T-handle
- Large anvil and steel swivel pad to ensure secure clamping
- Deep throat style

Stock No.	Throat Depth, inches	Capacity, inches	Spindle Dia., inches
CL537A	4 3/4	2 1/2	5/16
CL546A	6 1/4	2 1/2	3/8

Workbenches and Tables

BPWORKBENCH Heavy Duty Workbench (Blue-Point®)

- Full bottom shelf and superior powder-coat finish
- Net weight: 139 lb
- Weight capacity: 1,200 lb
- Top panel: 13 gauge steel
- Bottom shelf: 13 gauge steel
- Steel support: 12 gauge steel
- 60 1/16" W x 30 3/4" D x 34 1/16" H

BPWORKBENCH

EQG2223K5 Open Leg Workbench

- Heavy 12 gauge steel with die-formed legs welded into a one-piece unit for superior strength
- Includes storage drawer for mounting on an end or at the center of the bench
- 5' W x 29" D x 33 1/2" H

EQG2223K5

EQG245U5 Pedestal Workbench

- Manufactured with a heavy 12 gauge top surface and an integral back flange
- Four drawer pedestal is designed with roller drawer rails for smooth, non-binding operation
- 5' W x 27 1/2" D x 34 1/8" H

EQG245U5

PRESSES

CG100

3 Ton Arbor Press

CG100 Arbor Press

Frame is 2" steel channel. Bolts to work bench. Gearing multiplies handle pressure up to 3 ton force. Set includes arbor press frame, CG100-14 utility punch, CG100-15 work block, and CG100-16 adaptor to convert 1/2" drive to 5/16" round drive.

Specifications	Diameter, inches
Dimensions	18" high, 11 1/8" wide
Pressure, tons	3
Base Size	11 1/8" x 6 1/8"
Vertical Capacity	12 3/4"
Opening Width	9"
Width Between Work Brackets	9"
Pressure Shaft Stroke	9" (when utility punch is attached)

Optional Accessories for CG100: The adaptors from A57Q bushing driver set can be used with CG100-16 5/16" round drive adaptor. The CJ951 bearing separator fits neatly between the work support brackets.

CG471-9

Step Plates

Use step plates for the pressing of bearings, bushings and general pressing applications.

Stock No.	Diameter, inches	CG173	CG471A
CG173-1	5/8 and 1	•	
CG173-2	3/4 and 1 1/8	•	
CG173-3	7/8 and 1 1/4	•	
CG173-4	1 and 1 3/8	•	
CG173-5	1 1/8 and 1 1/2	•	
CG471-5	1 1/4 and 1 5/8		•
CG471-6	1 3/8 and 1 3/4		•
CG471-7	1 1/2 and 1 7/8		•
CG471-8	1 5/8 and 2 1/16		•
CG471-9	1 3/4 and 2 3/16		•
CG471-10	1 7/8 and 2 5/16		•
CG471-11	2 and 2 7/16		•
CG471-12	2 1/8 and 2 5/8		•
CG471-13	2 1/4 and 2 3/4		•
CG471-14	2 3/8 and 2 7/8		•
CG471-15	2 1/2 and 3		•
CG471-16	2 3/4 and 3 1/4		•
CG471-17	3 and 3 1/2		•

WARNING
• Keep away from children
• Read safety precautions on pages W1 to W4

AIR COMPRESSORS

BRA7380V

BRA7380VEM

BRA8380V

BRARS8380H

BRA10312H

BRA15312H

BRA20312H

Snap-on® Air Compressors (Three Phase)

Stock No.	Horsepower, HP	Pump Stages	Tank, gal.	Tank Style	Electrical Req.	Amp Req.	Mag Starter	Hour Meter	Auto Tank Drain	Air Delivery SCFM @ PSI	Max. PSI
BRA7380V*†	7	Dual	80	Vertical	208/230V, 3-phase	30 @ 208/230V	Yes	Yes	Yes	23.5 @ 175	175
BRA7380VEM*†	7	Dual	80	Vertical	208/230V, 3-phase	30 @ 208/230V	Yes	No	No	23.5 @ 175	175
BRA8380V*†	8	Dual	80	Vertical	208/230V, 3-phase	30 @ 208/230V	Yes	Yes	Yes	27.0 @ 175	175
BRARS8380H*	8	Rotary Screw	73	Horizontal	208/230V, 3-phase	30 @ 208/230V	Yes	Yes	No	35.0 @ 125	144
BRA10312H*	10	Dual	120	Horizontal	208/230V, 3-phase	40 @ 208/230V	Yes	No	Yes	36.0 @ 175	175
BRA15312H*	15	Dual	120	Horizontal	208/230V, 3-phase	75 @ 208/230V	Yes	No	Yes	48.0 @ 175	175
BRA20312H*	20	Dual	120	Horizontal	208/230V, 3-phase	100 @ 208/230V	Yes	No	Yes	75.0 @ 175	175

*440/460/480V wiring available
†BRA7380V, BRA7380VEM, BRA8380V are available with horizontal tanks via special order.

BRA5DV30VP

BRAC560V

BRA5140H

BRA517V

BRA7180V

BRA7180VEM

BRA8180V

BRARS8180H

BRA9G3B

Snap-on® Air Compressors (Single Phase)

Stock No.	Horsepower, HP	Pump Stages	Tank, gal.	Tank Style	Electrical Req.	Amp Req.	Mag Starter	Hour Meter	Auto Tank Drain	Air Delivery SCFM @ PSI	Max. PSI
BRA5DV30VP	3 (peak)	Single	27	Portable	120/220V, 1-phase	20 @ 120V, 15 @ 220V	Not Req.	No	No	7.0 @ 125	125
BRAC560V	5	Single	60	Vertical	208/230V, 1-phase	20 @ 208/230V	Not Req.	No	No	13.5 @ 140	140
BRA5140H	5	Dual	40	Horizontal	208/230V, 1-phase	30 @ 208/230V	Not Req.	No	No	16.0 @ 175	175
BRA517V	5	Dual	70	Vertical	208/230V, 1-phase	40 @ 208/230V	Yes	No	No	17.5 @ 175	175
BRA7180V*	7	Dual	80	Vertical	208/230V, 1-phase	40 @ 208/230V	Yes	Yes	Yes	23.5 @ 175	175
BRA7180VEM*	7	Dual	80	Vertical	208/230V, 1-phase	40 @ 208/230V	Yes	No	No	23.5 @ 175	175
BRA8180V*	8	Dual	80	Vertical	208/230V, 1-phase	40 @ 208/230V	Yes	Yes	Yes	27.0 @ 175	175
BRARS8180H	8	Rotary Screw	73	Horizontal	208/230V, 1-phase	40 @ 208/230V	Yes	Yes	No	35.0 @ 125	144
BRA9G3B	9	Dual	30	Horizontal	Gas Engine, Electric Start	—	—	No	No	23.0 @ 175	175

*BRA7180V, BRA7180VEM, BRA8180V are available with horizontal tanks via special order.

⚠WARNING

- Use pressure regulator, lubricator and moisture filter on air line
- Follow maintenance requirements
- Read safety precautions on pages W1 to W4

AIR PROCESSING EQUIPMENT

AHR424

AHR426

AHR428

AHR430

AHR423

AHR438

Quick Clamp® Regulators, Filters and Valves

- System utilizes modular design of filters, regulators, lubricators and accessories
- Allows installation and removal of the AHR services units and accessories without breaking a pipe connection
- Clamping device holds AHR product components in rigid combinations

AHR424 General Purpose Filter
- Excellent water removal characteristics
- Standard depth type 40 mm filter element
- Particle removal per ISO 8573-1, Class 5 and Class 3

AHR426 General Purpose Pressure Regulator
- Features full-flow gauge ports and standard relieving regulators
- Low torque, non-rising pressure adjustment knob has integral locking device
- Balanced valve minimizes effect of variation in inlet pressure on the outlet pressure

AHR428 Oil Filter Lubricator
- Features a quick release bayonet bowl, a high visibility prismatic lens and a liquid level indicator
- Lubricates a single tool, cylinder or other air-powered device

AHR430 General Purpose Filter/ Regulator
- Low torque, non-rising pressure adjustment knob has integral locking device
- Standard depth type 40 µm filter element
- Particle removal per ISO 8573-1, Class 5 and Class 3

AHR423 Automatic Drain Valve
- When fluid reaches full level it activates the float and drains unwanted oil and water automatically
- Can be used in place of a manual drain on the following units: AHR424 and AHR430

AHR438 Wall Mount Bracket
- Made of heavy duty metal
- Can be used on the following units: AHR424, AHR426, AHR428 and AHR430

Filters/Regulators

Stock No.	Maximum Inlet Pressure, psig (bar)	Temperature Range, °F (°C)	Flow, scfm	Drain Connection Manual	Drain Connection Automatic	Inlet/Outlet Port Size	Gauge Port
AHR424	250 (17.2)	175 (79)	150	7/16"-24 UNS (m)	1/8" NPT(f)	1/2" NPT(f)	—
AHR426	300 (20.7)	0–175 (-18–79)	—	—	—	1/2" NPT(f)	1/4" NPT(f)
AHR428	250 (17.2)	175 (79)	3.5-100	7/16"-24 UNS	—	1/2" NPT(f)	—
AHR430	250 (17.2)	0–175 (-18–79)	—	7/16"-24 UNS	1/8" NPT(f)	1/2" NPT(f)	1/4" NPT(f)

*Blue-Point®

AHRB200

Regulators, Filters and Valves

Stock No.	Inlet/Outlet Port Size	Adjustable Pressure Range	Maximum Service Pressure	Oil Capacity	Operating Temperature Range
AHRB200	1/2" NPT (F)	5–120 psig (.5–8.5 kgf/cm²)	140 psig (9.9 kgf/cm²)	80 mL	41–140 °F (5–60 °C)

WHEN YOUR SHOP IS CLEAN, YOU CLEAN UP.

A clean garage is an efficient garage. And an efficient garage is one that makes more money.

Cleaning Equipment — Snap-on has all the solutions to keep your tools and garage looking polished. Which means you – and your shop – will shine.

Parts Washers — Whether your shop requires solvent-based or aqueous units, Snap-on carries a full line to meet your cleaning needs.

MORE GREEN.

Minimize the service fees to have used solvent carried away. A Snap-on® parts washer saves you money – and, helps save the environment.

PARTS WASHERS: SOLVENT BASED

Snap-on® dual filter parts washers provide a clean supply of solvent for washing parts. Filtration system virtually eliminates solvent changes.

Parts Washers

- Composite dual stage filter provides continuous filtration of solvent
- Tubs are constructed of 16 gauge steel and feature an added lip for strength
- Complete with work lamp and flexible spout (except for PBD34A and PBC16)
- Use PBA760 Solvent on p.724

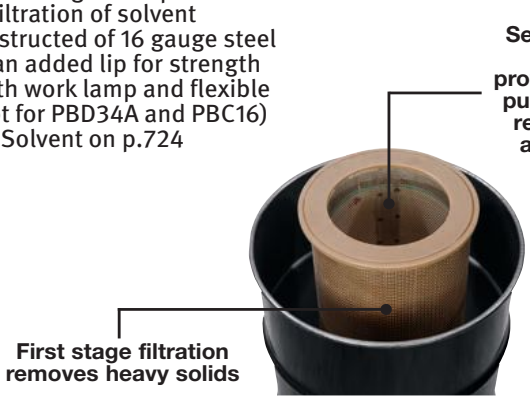

Dual Stage Filter

PBD3222A

PBC4828

PBD2622A

PBC16

PBD34A

Specifications	PBD3222A	PBC3222A	PBC4828	PBD2622A	PBC16	PBD34A*
Filtration	Dual	Dual	Dual	Dual	—	—
Base	Drum	Square	Square	Drum	—	Drum
Inside Dimensions, inches	10 H x 32 W x 22 D	10 H x 32 W x 22 D	14 H x 48 W x 28 D	7 H x 26 W x 17 D	6 H x 15 W x 16 D	7 H x 28 W x 22 D
Fluid Requirements gal	20	20	20	10	5	10
Input, V AC (Hz)	120V AC (60Hz)	120V AC (60Hz)	120V AC (60Hz)	120V AC (60Hz)	120V AC, 60Hz	120V AC (60Hz)
Pump Volume, GPH	325	325	325	210	210	210
Output Pressure, PSI	50	50	50	50	50	50
Overall Dimensions, inches	39 H x 36 W x 26 D	39 H x 36 W x 26 D	45 H x 52 W x 32 D	34 H x 30 W x 21 D	10 H x 1 W x 23 D	35 H x 31 W x 23 D
Open Height, inches	63	63	75	53	23	60
Replacement Filter	PBD3209	PBD3209	PBD3209	PBD3202	—	—
European Models	PBDH3222AEUR	PBCH3222AEUR	PBCH4828EUR	PBDH2622AEUR	—	—
PBD1751 Parts Tray	Included	Included	Included	—	PBCH16-EUR	Optional
PBA720A Drain Table	Optional	Optional	Optional	—	—	Optional

*Blue-Point®
European Model – (230V AC, 50Hz)
† CE

TECHNICAL SUPPORT 1-800-253-3661

PBC33B

PBC42B

PBC57A

PBC3022

Electric Medium Duty PBC42B

PBC33B Heated Aqueous Parts Washer
- Clean parts with a pressurized cleaning spout
- Heated for additional effectiveness
- Polysateen drain filter to remove solids
- Heavy wall polyethylene tub and solid base
- Integral oil skimmer removes oil and grease from the cleaning solution
- Includes five gallons of PBA733 cleaning solution and one gallon of PBA734 cleaning concentrate booster
- Low solution warning indicator

PBC42B High-Pressure Parts Washer
- Fully enclosed aqueous parts washer
- Blast parts clean with a high-pressure wand
- Soap solution is heated for additional effectiveness
- Automatic soak cycle loosens up grime
- Screen and contaminant trap to separate oil and grease from soap solution
- Includes 25 lbs of YADW896B powdered soap

PBC55-1

PBC55-3

Electric Heavy Duty

PBC57A High-Pressure Automatic Parts Washer
- Automatically cleans engine blocks, cylinder heads, transmission cases and small parts
- Heated and pressurized soap solution
- 20 high-pressure nozzles
- Turntable rotates and pulls out for ease of part loading
- Integral oil skimmer removes oil and grease from the soap solution
- Includes 25 lb of YADW896B powdered soap

PBC55-1 Parts Basket
- Perforated steel basket for holding small parts

PBC55-3 Parts Tree
- Welded steel tube rack for hanging smaller parts

PBC3022 Heated Aqueous Parts Washer
- Compact design is portable and can be moved to the job site easily
- Sealed lid prevents splashing when used on mobile service vehicles
- Heavy plastic body and lid constriction is made out of high density polyethylene
- Stainless-steel mesh work surface for durability and strength
- Heating element increases cleaning effectiveness and is thermostatically controlled
- Features a 5-micron filter to separate out dirt and debris
- On/off switch is lighted for greater visibility in low ambient light conditions
- Includes two gallons of PBA735 cleaning concentrate

Specifications	PBC33B	PBC42B	PBC57A	PBC3022
Depth, inches	28	24	35	22
Reservoir Capacity, gal	20	12	60	6
Electrical Requirements	120V AC, 60Hz	230V AC, 60Hz	230V AC, 60Hz	120V AC, 60Hz
Pump Motor, HP	—	3/4	2	—
Output Pressure, PSI	50	500	45	50
Volume, gal/h	325	180	2,700	200
Heater, watts	1,500	1,500	9,000	1,500
Open Height, inches	65	69	69	32
Inside Dimensions, inches	10 H x 21 W x 31 1/2 D	16–24 H x 40 W x 24 D	41 H x 35 W x 35 D	14 H x 17 W x 12 D
Overall Dimensions, inches	42 H x 37 W x 28 D	65 H x 44 W x 24 D	69 H x 53 W x 43 D	16 H x 30 W x 22 D

European Models – PBCH33B-EUR† (230V AC, 50Hz), PBCH42B-EUR† (230V AC, 50Hz), PBCH57AEUR† (230V AC, 50Hz)
† CE

WARNING

- Do not direct air or fluid stream at body
- Do not expose solvent to flames, sparks or other source of ignition
- Use in well ventilated area
- Do not use washer without fusible link or safety valve intact
- Read safety precautions on pages W1 to W4

PARTS WASHERS: ACCESSORIES

YA452

GA501A

YADW896B

PBA760

PBA725

PBA720A

PBD1751

Parts Cleaning Brushes/Solvent & Aqueous Based (Blue-Point®)

YA452 Parts Cleaning Brush
- Stiff bristles with contoured, nonslip plastic handle
- Attaches to most parts washers
- Flared hose end fits 1/4" spouts: 24" long hose has internal spring to prevent kinking
- 35 1/4" overall length

GA501A Parts Cleaning Brush
- Similar to YA452 without hose: 11 1/4" long

Aqueous Based Cleaning Solution and Powder

YADW896B Powdered Soap Cleaner
- Low foaming powdered soap solution
- For use in PBC57, PBC57A, PBC42 and PBC42A parts washers
- Comes in a 25 lb container – makes 60– 20 gal solution

PBA734 Cleaning Solution Additive
- Used in both PBC3022 and PBC33B for an added boost of cleaning power

PBA733 Certified Green Concentrate Solution
- Specially formulated solution does not absorb oil and dirt
- For use in PBC33A and B parts washers
- Comes in a 5 gal container – makes 20 gallons of solution

PBA735 Certified GreenConcentrate Solution
- Same as PBA733 except 1 gallon container

Petroleum Based Solvent Cleaners

PBA760 Solvent Cleaner
- Excellent for removing oil and grease
- Petroleum based cleaner with 140 flash point
- For solvent based parts washers only
- Comes in a 5 gallon container

Solvent Based Parts Washer Accessories

PBA725 Parts Basket
- Hangs inside solvent based parts washers

PBD1751 Parts Tray
- Attaches to outside of parts washer
- Measures 12 1/2" W x 18 1/2" D

PBA720A Drain Table
- Attaches to outside of parts washer
- Measures 25 1/2" W x 18 1/2" D

PARTS CLEANING

YA571

GA299

NOZZLEPG1

NOZZLESPRY1

YA297

NOZZLE360A

Water Nozzles and Hoses

YA571 Water Spray Nozzle
- Sprays hot or cold water
- Clip locks spray at desired setting
- Nose bumper prevents scratches to auto paint
- Fits standard garden hose threads

GA299 Air Solvent Gun
- Used for degreasing or applying oils
- Quickly converts to long wanded air gun
- Includes 8' hose for siphoning chemicals into gun
- Operates on 35–175 PSI

NOZZLEPG1 Pistol Grip Hose Nozzle
- Precision flow port allows water to flow directly and not "up" and through the handle, increasing water flow, pressure and power by approximately 30%
- Multiple spray patterns from jet, fan, power and even low flow
- Works with any standard 5/8" or larger water hose

NOZZLESPRY1 Hoze Nozzle
- Multiple spray patterns from jet, fan, power and even low flow
- Extra long handle for better grip
- Works with any standard 5/8" or larger water hose

YA297 Water Saving Hose Nozzle *(Blue-Point)*
- Provides concentrated pressure stream
- Features special rocker actuated check valve
- Fits standard garden hose threads
- 9" long

NOZZLE360A Water Spray Nozzle *(Blue-Point)*
- Turns any standard 5/8" hose into a multifunction cleaning tool
- Five different spray patterns
- 360° jetted nozzle is engineered from rugged extruded aluminum, forged stainless-steel, high grade fiberglass and comfort grip santoprene
- Two-way shutoff

YA730D

YA729B

Hose Reels

YA730D Heavy Duty Air/Water Hose Reel
- 50' of 3/8" ID low-pressure rubber hose
- Adjustable ball stop
- 24" connecting hose
- High carbon steel retraction spring
- Guide arm adjusts to four positions

YA729B Hose Reel
- 30' of 3/8" ID low-pressure rubber hose
- Adjustable ball stop
- 12" connecting hose
- Metal construction
- Max. pressure 300 PSI
- Max. water temperature 200 °F

PRESSURE WASHERS: COLD WATER

Includes ceramic plunger pump with stainless-steel valves, trigger gun, chemical injection and adjustable pressure.

SEPW1500P

SEPW1000

SEPW1500SM

SEPW1500USA

Electric Powered

Adjustable 0°–60° spray nozzle and GFCI protection with 35' power cord.

Specifications	SEPW1500P	SEPW1500SM	SEPW1000	SEPW1500USA
Style	Hand Carry	Wall Mounted	Cart Mounted	Cart Mounted
PSI (bar)	1,450 (100)	1,450 (100)	1,000 (69)	1,500
GPM (lpm)	2 (7.6)	2 (7.6)	2 (7.6)	2 (7.6)
HP	2	2	1.5	2
Voltage	120V/20A/single phase	120V/20A/single phase	120V/15A/single phase	120V/17A
Chemical Tank Cap.	—	—	1 gal	—
Pump Max. Temp.	140 °F	180 °F	140 °F	140 °F
Thermal	Mechanical	Mechanical	Mechanical	Mechanical
Hose Length (feet)	26	40	50	25
Dimensions (L x W x H)	18" x 12" x 11"	20" x 12" x 20"	21" x 16" x 36"	30" x 21 1/2" x 36"
Shipping Wt., lb	68	98	65	150

⚠WARNING

- Do not direct air or fluid stream at body
- Read safety precautions on pages W1 to W4

PRESSURE WASHERS

Gas Engine

Interchangeable or adjustable 0–40° spray nozzle plus powder-coated tube frame cart with pneumatic tires.

Specifications	SEPW1600G	SEPW2700G
Style	Cart Mounted	Cart Mounted
PSI (bar)	1,600 (110.4)	2,700 (183.3)
GPM (lpm)	3 (11.4)	3 (11.4)
HP	5	6.5
Engine	Honda® GC	*Honda* GX
Fuel Tank Cap.	1.9 qt	1 gal
Chemical Tank Cap.	3 gal	3 gal
Thermal	165 °F	165 °F
Hose Length (feet)	50	50
Dimensions (L x W x H)	30" x 21.5" x 36"	30" x 21.5" x 36"
Shipping Wt., lb	87	108

SEPW1600G

SEPW2700G

OIL FIRED HOT WATER

Heats water to 200 °F. Includes ceramic plunger pump with stainless-steel valves, trigger gun, interchangeable nozzles, chemical injection, adjustable pressure, stainless-steel cold wrap-around coil, poly fuel tanks and GFCI protection. Powder-coated tube-frame cart with pneumatic tires for extra durability.

SEPW30SHDE

SEPW3000QH

Electric Power

Specifications	SEPW14SHDE	SEPW15SHDE	SEPW20SHDE	SEPW30SHDE
PSI (bar)	1,450 (100)	1,500 (103.5)	2,000 (138)	3,000 (207)
GPM (lpm)	2 (7.6)	3 (11.4)	3	4 (15.2)
HP	2	3	5	7.5
Voltage	120V/20A/ single phase	230V/20A/ single phase	230V/25A/ single phase	230V/34A/ single phase
Burner Fuel Capacity	5 gal	5 gal	5 gal	5 gal
Dimensions (L x W x H)	34" x 27" x 47"	34" x 27" x 47"	34" x 27" x 47"	34" x 27" x 47"
Shipping Wt., lb	350	350	570	600

Gas Engine

Specifications	SEPW3000QH
PSI (bar)	3,000 (207)
GPM (lpm)	4 (15.2)
HP	13
Engine	*Honda*
Fuel Tank Capacity	6.9 qts
Burner Fuel Capacity	5 gal
Dimensions (L x W x H)	54" x 32" x 49"
Shipping Wt., lb	600

VACUUMS/SHOP FANS: VACUUMS

AV1000A Deluxe Air Vacuum Kit (Blue-Point®)

- Ideal for vehicle media body shops or any applications in need of picking up dust, metal shavings or broken glass
- Includes 8.7" aluminum extension tube, pointed nozzle, flexible tube and crevice tool with brush
- Large collection bag includes a debris baffle and sliding bag clamp for emptying debris
- Lightweight ergonomic handle design

Industrial strength full wet and dry cleaning/drying machines combine the highest degree of suction/airflow with ruggedly durable motors. Highest quality materials ensure long life. Ball bearing motor designed for strong performance with less motor strain. Engineered for easy portability and long life.

Specifications	YA1023A	YA1105A	YA1009SSA	BLPVAC5*
Tank	23 gal Poly	Corrosion Resistant	Corrosion Resistant	5 gal Polypro
Casters	Large Rear/Swivel Front	4 Swivel	Large Rear/Swivel Front	4 Metal Casters
Waterlift	93"	93"	93"	65"
Motor	2-Stage	2-Stage	2-Stage	1-Stage
CFM	99	99	99	49
Approvals	UL® and CUL®	*UL* and *CUL*	*UL* and *CUL*	*UL* and *CUL*
Operation	Full Wet and Dry	Full Wet and Dry	Full Wet and Dry	Full Wet and Dry
Filter Assembly	YAT90448	YAT24519	YAT90445	(Washable Cartridge Filter)
Includes	1.5" Wet/Dry Tool Set (hose w/ swivel end, crevice tool, upholstery tool, 2 straight extensions, floor tool housing with carpet face, brush face, squeegee face)	1.5" Wet/Dry Tool Set (hose w/ swivel end, crevice tool, upholstery tool, 2 straight extensions, floor tool housing with carpet face, brush face, squeegee face)	1.5" Wet/Dry Tool Set (hose w/ swivel end, crevice tool, upholstery tool, 2 straight extensions, floor tool housing with carpet face, brush face, squeegee face)	7' hose (1 1/4" dia.), 3 extension wands, washable cartridge filter, reusable foam sleeve, 10" floor/ squeegee nozzle, utility nozzle with brush and crevice tool

*Blue-Point®

YA1102

Portable Spotter

YA1102 Portable Spotter

- Use on carpeting, seat fabrics and other cleaning needs
- Durable molded tank
- Large 2 gallon capacity
- Powerful 55 PSI solution pump motor
- Strong recovery with 94 CFM vacuum rating
- Quick disconnect solution hose at body
- Includes hose and hand tool
- Use with CLEAN1A cleaner solution (32 oz) sold separately
- *UL* and CSA® listed
- ETL and ETL-c listed
- 84" waterlift
- Bypass 1.2 HP motor

SHOP FANS

WIND100

WIND100 Heavy Duty Air Mover

- For heavy duty air circulation applications
- Use for drying carpets, upholstery or hard floors plus removing vapors from enclosed spaces
- Maximum 2,500 CFM output
- Three-position discharge adjustment
- Three-speed switch

Specifications	WIND100
Power	120V AC/60Hz
Speeds	3
Air Delivery	1,600 – 2,000 – 2,500 CFM
Air Flow Direction	0°/30°/90°
High Output Fan Size	10 3/4" D x 10 1/2" W
Motor	.5 HP
Motor Rating	Continuous Duty
Power Cord	15' (18/3)
Size (H x W x D)	18" x 14" x 20 1/2"

⚠WARNING

- Do not direct air or fluid stream at body
- Read safety precautions on pages W1 to W4

SAFETY FIRST AND FOREMOST.

A safe shop means that everything is protected – you, your clients and your assets.

Safety Equipment — Do your job safely and comfortably with Snap-on® safety equipment: from basic safety glasses to cutting edge-designed face protectors, and more.

GA3000B

GA3200



YA160A

BLPEP1

Ear Protection

Specifications	GA3000B*	GA3200	YA160A	BLPEP1
Noise Reduction Rating, dB	25	28	25	21
Headband	Cushioned	Cushioned	Plastic	Plastic
Ear Piece	Cushioned	Cushioned	Foam	Foam
Adjustable Ear Piece	21	Plastic	Foam	N/A
Ear Piece Replacements	N/A	N/A	YA160A1	BLPEP1-1
Weight, lb	.49	.77	.06	.05

*Blue-Point®

EFPBONEHEDB

EFPSTRIKERB

EFPHANNIBALB

EFPNSTLKRB

EFPJURASSIC

EFPOLEGLORY

Face Protection

Specifications	EFPBONEHEDB	EFPSTRIKERB	EFPHANNIBALB	EFPNSTLKRB	EFPJURASSIC	EFPOLEGLORY
Shield Style	180° Peripheral	180° Peripheral	180° Peripheral	180° Peripheral	180° Peripheral	180° Peripheral
Headband	Yes	Yes	Yes	Yes	Yes	Yes
Adjustable Headband	Yes	Yes	Yes	Yes	Yes	Yes
Impact Resistance	Yes	Yes	Yes	Yes	Yes	Yes
Shield Included	Clear and #10 Welding	Clear and #10 Welding	Clear and #10 Welding	Clear and #10 Welding	Clear and #10 Welding	Clear and #10 Welding
Replacement Shields	EFPCLLENSREP	EFPCLLENSREP (Clear) EFP3WLDLENS (#3 Welding) EFP5WLDLENS (#5 Welding) EFP8WLDLENS (#8 Welding) EFP10WLDLENS (#10 Welding) EFP12WLDLENS (#12 Welding)	EFPCLLENSREP (Clear) EFP10WLDLENS (#10 Welding)	EFPCLLENSREP (Clear) EFP10WLDLENS (#10 Welding) EFP3WLDLENS (#3 Welding) EFP5WLDLENS (#5 Welding) EFP8WLDLENS (#8 Welding) EFP12WLDLENS (#12 Welding)	EFPADFLENSA	EFPADFLENSA

Face Shields

Specifications	GA225
Shield Style	Flat
Shield Size	7 3/4" x 15 1/4"
Headband	Yes
Adjustable Headband	Yes
Impact Resistance	Yes
Shield Included	Clear
Replacement Shields	GA225-1 (with PETG) GA225-2 (with PC)

GA225

EYE PROTECTION

Safety Glasses/Glass 1 Series

Specifications	GLASS1R	GLASS1BK
Lens	Clear	Clear
Frame	Red	Black
Anti-fog Lens Coating	Yes	Yes
Anti-scratch Lens Coating	Yes	Yes
Temple Length Adjustment	Yes	Yes
Tilt Adjustment	Yes	Yes
Design	Contemporary & Lightweight	Contemporary & Lightweight
Lens Replacement Available	Yes	Yes
Meets Requirements	ANSI® Z87.1, CSA® Z94.3-1992, EN166	*ANSI* Z87.1, *CSA* Z94.3-1992, EN166

GLASS1R

GLASS1BK

⚠WARNING

• Read safety precautions on pages W1 to W4

EYE PROTECTION

GLASS9BK

GLASS10BK

GLASS12BKA

Safety Glasses/Glass 9, 10 and 12 Series

Specifications	GLASS9BK	GLASS10BK	GLASS12BKA
Lens	Clear	Brown	Clear
Frame	Black	Black	Black Ear Pieces
Anti-fog Lens Coating	Yes	Yes	—
Anti-scratch Lens Coating	Yes	Yes	—
Temple Adjustment	Yes	Yes	5 Position
Design	Contemporary, sporty wraparound	Contemporary, sporty wraparound	Frameless, Sleek, Comtemporary
Meets Requirements	ANSI® Z87.1	*ANSI* Z87.1	*ANSI* Z87.1

ANSI Z87.1, CSA® Z94.3 and MIL-STD-662.

GLASS20BKYA

GLASS20BLMA

GLASS20BKWA

GLASS20BLA

Safety Glasses/Glass 20 Series

Specifications	GLASS20BKYA	GLASS20BLMA	GLASS20BKWA	GLASS20BLA
Lens	Amber	Mirror	Dark Green (Shade #5)	Clear
Frame	Black	Blue	Black	Blue
Lens Replacement Available	—	—	GLASS20LENSW	—
Additional Info	White Snap-on® Logo on Temples	White *Snap-on* Logo on Temples	White *Snap-on* Logo on Temples	White *Snap-on* Logo on Temples

ANSI Z87.1, *CSA* Z94.3 and MIL-STD-662

GLASS30R

GLASS30BK

GLASS31R

GLASS31BK

Safety Glasses/Glass 30 and 31 Series

Specifications	GLASS30R	GLASS30BK	GLASS31R	GLASS31BK
Lens	Clear	Clear	Clear	Clear
Frame	Red	Black	Red	Black
Anti-fog Lens Coating	Yes	Yes	Yes	Yes
Anti-scratch Lens Coating	Yes	Yes	Yes	Yes
Ventilation Channel	Yes	Yes	—	—

ANSI Z87.1

GLASS50BK

GLASS50R

GLASS60BK

GLASS60R

GLASS60SAP

Safety Glasses/Glass 50 and 60 Series

Specifications	GLASS50BK	GLASS50R	GLASS60BK	GLASS60R	GLASS60SAP
Lens	Clear	Clear	Clear	Clear	Clear
Frame	Black	Red	Black	Red	Sapphire
Anti-fog Lens Coating	Yes	Yes	Yes	Yes	Yes

ANSI Z87.1 and CE EN166

SOGKRDHF13

SOGKWHHF13

SOGKBFSM01

SOWIC08

Safety Glasses/Gasket® Series

- Impact resistant polycarbonate lens
- Scratch resistant hard coated lens
- Lightweight adjustable frame
- Meets *ANSI* Z87.1-2010
- Polychromatic Hellfire® Lens (SOGKRDHF13 and SOGKWHHF13 only) darkens in UV sunlight to 17% dark and moves to 84% clear at night
- Black Smoke glasses have neutral gray lens tint suitable for all situations

SOGKRDHF13 *Gasket* Red *Hellfire* Safety Glasses
SOGKWHHF13 *Gasket* White *Hellfire* Safety Glasses
SOGKBFSM01 Gasket® Black Smoke Safety Glasses

SOWIC08 Lens and Screen Cleaner, Wick it Clean®, 8-pack
Lens cleaner kit for SOGK Series safety glasses. Available in 8-pack only.

Safety Glasses with Ear Plugs (Blue-Point®)

- Lightweight
- Contemporary design with polycarbonate lens that absorb 99.9% UV
- Built-in ear protection
- Nylon slide allows for easy extension and retraction of tethered ear plugs
- Ear plugs extend over 4 1/2" for easy insertion into ear canals
- Soft plastic nose bridge provides added comfort and adjustablility
- ANSI® Z87.1

GLASS40CEAR Clear Lens
GLASS40YEAR Amber Lens
GLASS40GEAR Gray Lens
GLASS40-1 Replacement Ear Plugs

GLASS40CEAR

Protective Eyeshields

GLASSVIS Protective Eyeshields

- Will fit over prescription glasses or can be worn alone
- Wraparound side shields, impact resistant and anti-glare guard
- Clear uncoated lens with black frames
- *ANSI* Z87.1, CSA® Z94.3 and MIL-STD-662

GLASSVIS

GLASS1BOTG Protective Eyeshields

- Single panoramic lens offers increased visibility
- Protective coating resists fogging, scratching, static and UV rays
- Frames adjust horizontally and vertically for comfort
- Side impact protection
- Universal nose bridge
- Snap-on® logo on ear piece
- *ANSI* Z87.1

GLASS1BOTG

Safety Goggles

GAC1580A Dust/Impact Goggles

- Economic splash goggle with transparent clear body and indirect ventilation
- Fits over most prescription eyewear
- Fog-Ban® anti-fog coating
- Meets *ANSI* Z87.1-2010 and is certified to *CSA* Z94.3 standards

GAC1580A

GOGGLE1 Protective Goggles

- *ANSI* Z87.1-1989

GOGGLE1

GOGGLE2ATOR Safety Goggles

- Durable molded frame with soft and flexible elastomer that seals for a custom fit
- Quick adjust headband clips permit fast and easy fitting
- Indirect ventilation system channels and directs airflow over the lens, minimizing fogging and improving vision potential while providing superior splash and impact protection
- *Uvex 4C+* lens coating to protect against fogging, scratches and UV rays
- *ANSI* Z87.1

GOGGLE2ATOR

YA127C

Respirators and Filters

- Respirators and Filters note: Do not exceed maximum use concentrations established by regulatory standards

YA127C Half Mask Respirator

- Includes organic vapor cartridges and N95 pre-filters
- Approved by NIOSH and meets OSHA regulations governing particulate respirators under 42 CFR 84
- Large sealing surface and advanced yoke design for excellent nonslip fit
- Helps protect against organic vapors, dusts and mists when used with YA1991 N95 pre-filter and YA1992 organic vapor cartridge

YA127C9

YA127C9 Pre-filter/Filter Set

- Includes plastic cover, YA1991 N95 pre-filter and YA1992 organic vapor cartridge

YA199

YA199 Full Face Respirator

- Includes two organic vapor cartridges and two N95 pre-filters
- Provides a comfortable fit with durable silicone face piece, standard nose cup to prevent fogging and exceptional wide view anti-scratch lens
- Helps protect against organic vapors, dusts and mists when used with YA1991 N95 pre-filter and YA1992 organic vapor cartridge

YA1991

YA1991 N95 Pre-filter

- 95 filter efficiency level
- Effective against particulate aerosols free of oil
- Includes six pairs

YA1992

YA1992 Organic Vapor Cartridge

- Protects against organic vapors
- Includes one pair
- Do not use with isocyanates

WARNING • Read safety precautions on pages W1 to W4

GLOVES

GLOVE500BLB

GLOVE500RLB

Technician SuperCuff® Gloves

- Patented *SuperCuff* design provides a super comfortable, snug and secure wrist closure design while not restricting wrist and hand movement
- Low-profile TPR (Thermal Plastic Rubber) logo treatments
- Heavy Lycra® panels between fingers allows for greater comfort and fit
- Hidden interior stitching enhances glove life
- Gloves are machine washable. Air dry only
- Reduced seam design for the index finger
- New streamline logo treatments

GLOVE501BLB

GLOVE501RLB

Impact *SuperCuff* Gloves

- *SuperCuff* design provides a super comfortable, snug and secure fit without restricting wrist and hand movement
- New reduced seam design for the index finger
- New full finger dorsal TPR (Thermal Plastic Rubber) protection
- New two-layer fingertips for longer life
- New streamline logo treatments
- Enhanced dexterity

Technician *SuperCuff*	Stock No.	Color	Size
	GLOVE500BSB†	Black	Small
	GLOVE500BMB†	Black	Medium
	GLOVE500BLB†	Black	Large
	GLOVE500BXLB†	Black	XL
	GLOVE500BXXB†	Black	XXL
	GLOVE500RSB†	Red/Black	Small
	GLOVE500RMB†	Red/Black	Medium
	GLOVE500RLB†	Red/Black	Large
	GLOVE500RXLB†	Red/Black	XL
	GLOVE500RXXB†	Red/Black	XXL

Impact *SuperCuff*	Stock No.	Color	Size
	GLOVE501BSB†	Black	Small
	GLOVE501BMB†	Black	Medium
	GLOVE501BLB†	Black	Large
	GLOVE501BXLB†	Black	XL
	GLOVE501BXXB†	Black	XXL
	GLOVE501RSB†	Red/Black	Small
	GLOVE501RMB†	Red/Black	Medium
	GLOVE501RLB†	Red/Black	Large
	GLOVE501RXLB†	Red/Black	XL
	GLOVE501RXXB†	Red/Black	XXL

† CE

GLOVE502BLA

GLOVE502RLA

Heavy Duty *SuperCuff* Gloves

- Dual fingertip layers for protection and control
- Thermal plastic rubber protection panels help eliminate cuts and scrapes
- Built-in tool rest provides extra support with pneumatic tools
- Gel padding in the palm reduces impact
- 5 mm EVA foam
- Accordion style knuckle protection

Stock No.	Color	Size
GLOVE502BSA†	Black	Small
GLOVE502BMA†	Black	Medium
GLOVE502BLA†	Black	Large
GLOVE502BXLA†	Black	XL
GLOVE502BXXA†	Black	XXL
GLOVE502RSA†	Red/Black	Small
GLOVE502RMA†	Red/Black	Medium
GLOVE502RLA†	Red/Black	Large
GLOVE502RXLA†	Red/Black	XL
GLOVE502RXXA†	Red/Black	XXL

† CE

GLOVELMOSS

SuperCuff Cold Weather

- MOSSY OAK® poly spandex fleece top lined with Bremberg® for additional insulation
- Lined genuine leather palm and index finger which offers incredible dexterity and durability along with added insulation from cold weather

GLOVE503RCL

SuperCuff Heavy Duty Carbon Knuckle

- Hard Carbon Knuckle helps protect from heavy impacts in knuckle and back of the hand area
- Two layer palm with nonslip panels on thumb, index and middle fingers allows the user to perform the most extreme tasks without losing control
- Gel palm padding reduces vibrations without compromising dexterity

Stock No.	Color	Size
GLOVELMOSSM	*Mossy Oak*	Medium
GLOVELMOSSL	*Mossy Oak*	Large
GLOVELMOSSXL	*Mossy Oak*	XL
GLOVELMOSSXX	Mossy Oak	XXL

Stock No.	Color	Size
GLOVE503RCS†	Red	Small
GLOVE503RCM†	Red	Medium
GLOVE503RCL†	Red	Large
GLOVE503RCXL†	Red	XL
GLOVE503RCXX†	Red	XXL

† CE

Hi-Vis Technician SuperCuff® Gloves

- *SuperCuff* design provides a super comfortable, snug and secure fit without restricting wrist and hand movement
- Reduced seam design for the index finger
- New streamline logo treatments

GLOVE500HLB

Hi-Vis Impact *SuperCuff* Gloves

- Extreme all-over protection
- Cut-resistant palm and thumb
- Reflective fingertips and cuff piping
- New streamline logo treatments
- Incredible dexterity
- Great for tow truck workers

GLOVE501HLB

Hi-Vis Carbon Knuckle *SuperCuff* Gloves

- *SuperCuff* design provides a super comfortable, snug and secure fit without restricting wrist and hand movement
- New reduced seam design for the index finger
- New full finger dorsal TPR (Thermal Plastic Rubber) protection
- New two-layer fingertips for longer life
- New streamline logo treatments
- Enhanced dexterity

GLOVE503HCL

	Stock No.	Size		Stock No.	Size		Stock No.	Size
Hi-Vis Tehnician *SuperCuff*	GLOVE500HMB†	Medium	Hi-Vis Impact *SuperCuff*	GLOVE501HMB†	Medium	Hi-Vis Carbon Knuckle *SuperCuff*	GLOVE503HCM†	Medium
	GLOVE500HLB†	Large		GLOVE501HLB†	Large		GLOVE503HCL†	Large
	GLOVE500HXLB†	XL		GLOVE501HXLB†	XL		GLOVE503HCXL†	XL
	GLOVE500HXXB†	XXL		GLOVE501HXXB†	XXL		GLOVE503HCXX†	XXL

†CE

Impact Gloves (M-Pact® I Series)

- Designed for extra protection
- Anti-vibration palm protection and reinforced fingers
- Molded TPR (Thermal Plastic Rubber) top helps prevent cuts, scrapes and bruises

Impact Gloves (*M-Pact* II Series)

- Compression-molded thumb panel
- Additional panels protect fingertips
- Stretch neoprene cuff with molded TPR closure
- Molded TPR (Thermal Plastic Rubber) protection protects top of the hand and knuckles
- High-abrasion grip finger
- Durable abrasion-resistant synthetic palm
- 2 mm Poron® pad sandwiched between abrasion-resistant grip and molded TPR

GLOVE301ARL

GLOVE305L

Impact Gloves (*M-Pact* III Series)

- 2pc 3D compression-molded knuckles protected with ballistic laminate
- Stretch neoprene cuff with molded TPR closure
- Molded TPR (Thermal Plastic Rubber) protection protects top of the hand and knuckles
- High-abrasion grip finger
- Durable abrasion-resistant synthetic palm
- 2 mm *Poron* pad sandwiched between abrasion-resistant grip and molded TPR

GLOVE306L

	Stock No.	Size		Stock No.	Size		Stock No.	Size
Impact Gloves (*M-Pact* I Series)	GLOVE301ARS†	Small	Impact Gloves (*M-Pact* II Series)	GLOVE305S	Small	Impact Gloves (*M-Pact* III Series)	GLOVE306S	Small
	GLOVE301ARM†	Medium		GLOVE305M	Medium		GLOVE306M	Medium
	GLOVE301ARL†	Large		GLOVE305L	Large		GLOVE306L	Large
	GLOVE301ARXL†	XL		GLOVE305XL	XL		GLOVE306XL	XL
	GLOVE301ARXX†	XXL		GLOVE305XX	XXL		GLOVE306XX	XXL

†CE

Wrecker Gloves

- Extreme all-over protection
- Cut-resistant palm and thumb
- Reflective fingertips and cuff piping
- New streamline logo treatments
- Incredible dexterity
- Great for tow truck workers

GLOVE504HXL

GLOVE504BXL

Stock No.	Color	Size	Stock No.	Color	Size
GLOVE504HL	Hi-Vis Yellow/Black	Large	GLOVE504BL	Black	Large
GLOVE504HXL	Hi-Vis Yellow/Black	XL	GLOVE504BXL	Black	XL
GLOVE504HXX	Hi-Vis Yellow/Black	XXL	GLOVE504BXX	Black	XXL

GLOVES

GLOVE600L

GLOVE600LG

GLOVE600LO

- Form-fitting stretch spandex top
- Long-lasting two-layer thumb panel
- Additional panels of synthetic protection surround the fingertips
- Machine washable – will not shrink or fade
- Flexible TPR wrist closure
- Moisture-wicking trek dry material
- Durable abrasion-resistant synthetic palm

Original Mechanic's Gloves

Stock No.	Color	Size
GLOVE600S	Red	Small
GLOVE600M	Red	Medium
GLOVE600L	Red	Large
GLOVE600XL	Red	XL
GLOVE600XX	Red	XXL
GLOVE600MG	Green	Medium
GLOVE600LG	Green	Large
GLOVE600XLG	Green	XL
GLOVE600MO	Orange	Medium
GLOVE600LO	Orange	Large
GLOVE600XLO	Orange	XL

Mossy Oak® Mechanic's Gloves

GLOVE601L

- Form-fitting stretch spandex top
- Long-lasting two-layer thumb panel
- Additional panels of synthetic protection surround the fingertips
- Machine washable – will not shrink or fade
- Flexible TPR wrist closure
- *Mossy Oak* gloves' infinity design sublimated on moisture-wicking trek dry material
- Durable abrasion-resistant synthetic palm

Stock No.	Size
GLOVE601S	Small
GLOVE601M	Medium
GLOVE601L	Large
GLOVE601XL	XL
GLOVE601XX	XXL

GLOVE300L

Fast Fit Technician Gloves

- Easy on/off for ultimate in convenience
- Great fit and feel, excellent value
- Performance plus economy
- Synthetic leather palm, stretch panels between the fingers
- Two-way stretch spandex padded back

Stock No.	Size
GLOVE300S†	Small
GLOVE300M†	Medium
GLOVE300L†	Large
GLOVE300XL†	XL
GLOVE300XXL†	XXL

† CE

GLOVE100L

Unlined Leather Work Gloves

- Use for heavy duty work and wear
- Comfort fit thumbs for dexterity and flexibility
- Embossed Snap-on® logo on reverse

Stock No.	Size
GLOVE100M	Medium
GLOVE100L	Large
GLOVE100XL	XL

GLOVE101L

Lined Leather Work Gloves

- For heavy duty work and wear
- Lined for protection and warmth
- Embossed *Snap-on* logo on reverse

Stock No.	Size
GLOVE101L	Large
GLOVE101XL	XL

GLOVE505RXL

Deep Freeze Gloves

- Extreme weather all-over protection
- Windproof with waterproof barrier
- Rubberized palm and thumb for great grip
- Reflective fingertips and cuff piping
- New streamline logo treatments
- Incredible dexterity

Stock No.	Color	Size
GLOVE505RM	Red/Black	Medium
GLOVE505RL	Red/Black	Large
GLOVE505RXL	Red/Black	XL
GLOVE505XX	Red/Black	XXL

GLOVE304CGL

Cold Weather Gloves

- Heavyweight fleece outer
- Windproof insert with inner Nylex® lining
- Grip thumb and palm panel
- Nylon finger gussets stay flexible in all weather conditions
- Synthetic leather protects outer edge of thumb
- Gauntlet cuff with Velcro® closure
- Water resistant grip with 2pc palm

Stock No.	Size
GLOVE304CGS	Small
GLOVE304CGM	Medium
GLOVE304CGL	Large
GLOVE304CGXL	XL
GLOVE304CGXX	XXL

Cut-Resistant Gloves

- Abrasion-, blade- and tear-resistant
- Great for tear-down work, salvage yards, sheet metal work
- Provides excellent protection while maintaining great dexterity
- Level 4 abrasion resistance
- Level 3 blade cut resistance
- Level 4 tear resistance
- Level 4 puncture resistance

GLOVE410L

Stock No.	Size
GLOVE410M	Medium
GLOVE410L	Large
GLOVE410XL	XL

Abrasion Resistant Nitrile Gloves (Blue-Point®)

- Nitrile dipped coating for protection on dirty jobs
- Ergonomically pre-curved design for comfort
- High abrasion resistance protects hand on sharp edges
- Incredible grip and dexterity on wet and dry surfaces

GLOVE400L

Stock No.	Quantity	Size
GLOVE400S	3 Pack	Small
GLOVE400M	3 Pack	Medium
GLOVE400L	3 Pack	Large
GLOVE400XL	3 Pack	XL
GLOVE400XXL	3 Pack	XXL

Black Nitrile (Glove 8 Series)

- Powder-free plus excellent tear resistance
- Use for mechanical repairs, spray painting and refinishing applications
- Resists auto detailing chemicals

Nitrile (Glove 5 Series)

- Gloves resist nicks, cuts and abrasions and protect against chemical splashes
- Three times the puncture resistance of natural latex or vinyl gloves
- Light powdering facilitates removal with minimal residue
- Micro textured for better gripping

Heavy Duty Nitrile (Glove 7 Series)

- Use for paint mixing, parts cleaning, transmission rebuilds and more
- Superior puncture resistance to that of natural latex or vinyl gloves
- Resists nicks, cuts and abrasions, and protects against chemical splashes
- Thick 8 mil nitrile construction
- Extra long "sleeve" for additional protection
- Powder-free. Textured for better gripping

Heavy Duty Latex (Glove 6 Series)

- 14 mil thickness for heavy duty usage
- Textured fingers and palm for maximum grip
- Lightly powdered for easy on/off
- Will resist most shop chemicals
- Long cuff

Extra Thick Latex (Glove 9 Series)

- Twice as thick as standard latex gloves for tear resistance
- Microtexture improves gripping power
- Powder-free, as powder promotes allergies
- Box of 100 makes it economical

GLOVE8LA

GLOVE5MB

GLOVE7LB

GLOVE6LB

GLOVE9L

	Stock No.	Quantity	Size
Black Nitrile Technician's Gloves	GLOVE8MA	Box of 100	Medium
	GLOVE8LA	Box of 100	Large
	GLOVE8XLA	Box of 100	XL
Nitrile Technician's Gloves	GLOVE5MB	Box of 100	Medium
	GLOVE5LB	Box of 100	Large
	GLOVE5XLB	Box of 100	XL
Heavy Duty Nitrile Technician's Gloves	GLOVE7MB	Box of 50	Medium
	GLOVE7LB	Box of 50	Large
	GLOVE7XLB	Box of 50	XL
Heavy Duty Latex Technician's Gloves	GLOVE6MB	Box of 50	Medium
	GLOVE6LB	Box of 50	Large
	GLOVE6XLB	Box of 50	XL
Extra Thick Latex Technician's Gloves	GLOVE9M	Box of 100	Medium
	GLOVE9L	Box of 100	Large
	GLOVE9XL	Box of 100	XL

Glove Dispenser

GLOVEHOLDERB Latex Glove Dispensing Rack

- Holds GLOVE5, GLOVE6, GLOVE7, GLOVE8 and GLOVE9 series gloves
- Metal construction prevents damage
- Magnetic base allows attachment to tool storage unit or other ferrous metal surface
- Three "springs" secure box firmly in holder
- Mounting holes for attachment to non-ferrous surfaces
- 10" x 5 5/8" x 3 7/8"
- Black

GLOVEHOLDERB

SHOP SUPPLIES: LUBRICATION

ULUBE1 AS8 AS16

Synthetic Lubricant

ULUBE1 Synthetic Lubricant
- Easy to apply spray extends tool life
- Specially formulated for use with bearings and other rotating devices
- Case of (12) 5.5 oz cans

Antiseize Lubricant

- Premium general purpose copper/graphite blend antiseize compound
- Formulated to prevent seizing and galling at high temperatures (resistant to 1,800 °F)
- Lubricates and protects against corrosion
- Eases assembly and disassembly of metal parts while reducing friciton and wear

AS8 Antiseize Lubricant
8 oz bottle with applicator brush attached to cap.

AS16 Antiseize Lubricant
16 oz bottle with applicator brush attached to cap.

AUTO CARE/DETAILING

CLEAN1A

BUFF3KIT

Cleaners, Polishes and Sealants

CLEAN1A Cleaning Solution
- Fresh scent
- Multisurface cleaner for tires, aluminum and alloy wheels, carpets, seats and other interior fabrics
- Recommended for easy removal of UV dyes from air conditioning units
- Designed to work alone or with Snap-on® YA1102 dirt and stain extractor
- Case of (12) 32 oz spray bottles

Buffing Kits (Blue-Point®)

BUFF3KIT Miniature Buffing Kit
- Ideal for buffing and polishing autos, boats, motorcycles, aircraft
- Use on all painted surfaces, metal, chrome and wood
- Varied pad selection from ultra fine to very aggressive
- Wavy edge allows user to reach tight places
- Hook and loop retention system for quick, easy and secure pad/driver connection
- Includes one 1/4" shaft, 3" diameter Shur-Grip pad holder and one each of the following: blue wavy foam pad (fine polishing), black lambswool pad (ultra fine polishing), twisted wool pad (aggressive buffing) and fiberal wavy pad (ultra coarse buffing)
- EU – GB

BUFF3KIT1 Foam Pad
- 3" diameter wavy foam pads for fine polishing applications
- Five pads in storage tube EU – GB

BUFF3KIT2 Lambswool Pad
- 3" diameter lambswool pads for ultra fine polishing applications
- Five pads in storage tube EU – GB

BUFF3KIT3 Twisted Wool Pad
- 3" diameter twisted wool pads for aggressive buffing applications
- Five pads in storage tube EU – GB

BUFF3KIT4 Fibreral Wavy Pad
- 3" diameter fibreral wavy pads for ultra coarse buffing applications
- Five pads in storage tube EU – GB

BUFF3KIT5 Shur-Grip Pad Holder (3" diameter)
- Use with buffing/polishing pads in the BUFF3KIT series
- 1/4" shaft
- 3" diameter
- EU – GB

HAND CLEANERS

WOD303CSA WOD503CSA

Medicated Hand Cleaners

- Quickly dissolves and removes stubborn dirt and stains while antiseptic properties protect the skin

WOD303CSA Medicated Hand Cleaner
- Fresh orange scent
- Case of four 4 1/2 lb cans

WOD503CSA Medicated Hand Cleaner
- Case of four 4 1/2 lb cans

WOD423CSA WOD623CSA WOD1050CSA

Pumice Hand Cleaners

- Extra strength pumice hand cleaner with antiseptic ingredient

WOD423CSA Pumice Hand Cleaner
- Fresh orange scent
- Case of four 4 1/2 lb cans

WOD623CSA Pumice Hand Cleaner
- Case of four 4 1/2 lb cans

WOD1050CSA Pumice Hand Cleaner
- Fresh orange scent
- Case of four 1 gal bottles

Water Activated Hand Cleaners

- Soybean-based, water-activated and concentrated formula with fibril scrubbers
- Contains antiseptic ingredient and conditioners for maximum skin protection
- Redline hand cleaner offers the highest performance skin cleaning with fibril/pumice double scrubbing action

WOD2025ACSA Water Activated Hand Cleaner
- Case of four 84 oz bottles
- Requires WOD1027 pump dispenser

WOD2325ACSA Redline Hand Cleaner
- Case of four 84 oz bottles
- Requires WOD1027HT pump dispenser

WOD2018ACSA Water Activated Hand Cleaner
- Portable size is perfect for a toolbox, cart or at home
- Squeeze bottle with no-drip nozzle
- Case of (12) 18 oz bottles

WOD2115ACSA Nitro-Gold Hand Cleaner
- For use in WOD8207 auto dispenser or WOD8307 manual dispenser
- Case of four

WOD2025ACSA

WOD2325ACSA

WOD2115ACSA

WOD2018ACSA

WOD507

WOD1027

WOD1027HT

WOD8207

WOD8307

Hand Cleaner Dispensers

WOD507 Heavy Duty Hand Cleaner Dispenser
- Convenient for wall mounting
- 4 1/2 lb cans of hand cleaner

WOD1027 Pump Style Hand Cleaner Dispenser
- Wall-mounted, pump-style dispenser for WOD2025ACSA or WOD2325ACSA hand cleaners in 84 oz bottles

WOD1027HT Pump Style Hand Cleaner Dispenser
- Wall-mounted, pump-style dispenser for WOD2025ACSA or WOD2325ACSA hand cleaners in 84 oz bottles

WOD8207 Automatic Hand Cleaner Dispenser
- Auto dispensing portion control, no waste, dripping or cross contamination
- Over 900 washes per refill bottle
- Auto dispenser eliminates grease and grime accumulating on dispenser
- Four D batteries will last 30,000 cycles, over 30 refills, or over 18 months' battery life
- Sleek ergonomic and attractive design, less than 4" wide, meeting the fire marshal code for hallways

WOD8307 Manual Hand Cleaner Dispenser

Proprietary unit, refills only from your authorized Snap-on® franchisee (Refill: WOD2115ACSA)
- 2 mL dispenses with each activation and 750 hand washes per refill
- Sleek ergonomic and attractive design, less than 4" wide, meeting the fire marshal code for hallways
- Tamper-resistant and keyless locking cover
- Dispense from bottom, eliminating unused hand cleaner in refill

Hand and Shop Towels

WOD5020 Hand and Tool Cleaning Towels
- Convenient hand towels for cleaning tools or hands of oil and grease
- Towels contain lanolin and rust preventatives

WOD5020

Fingernail/Hand Brush

WOD1000 Fingernail Brush
- Use with any "WOD" series hand cleaner

WOD1000

⚠WARNING
- Do not ingest or use on face
- Read safety precautions on pages W1 to W4

SHOP SUPPLIES: WIRE BRUSHES

WBBS2

WBSS2

WBSS3

WBSS5

WBSS8

WBSS9

WBSS14

WBSS5CAL

WBSS2BKT

WBBS2BKT

Wire Brushes

- Ergonomic cushion grip handle designed for maximum comfort and control
- Use with both hands to maximize pressure
- Heavy 28 gauge stainless-steel gives units maximum strength and durability
- Choice of brush width and length allows you to cover a wide range of applications

Applications:
Ideal for cleaning rusted threads, battery terminals and gaskets. Removes body rust prior to welding on various metal parts. Cleans off caulk and interpanel grinding welds.

Stock No.	Description	WBSET	WBSSET	WBMSSET	WBSS2BK	WBBS2BKT
WBBS2	2" miniature brass wire brush	2	1	1	25	
WBSS2	2" miniature stainless-steel wire brush	1	1	1		25
WBSS3	3" stainless-steel wire brush		1	1		
WBSS5	5" stainless-steel wire brush					
WBSS8	7 3/4" stainless-steel wire brush		1	2		
WBSS9	8 3/4" stainless-steel wire brush			1		
WBSS14	6 3/4" stainless-steel wire brush		1	2		
WBSS5CAL	5" stainless-steel wire caliper brush					

AC5C

AC58E

AC64B

AC59C

Specialty Brushes (Blue-Point®)

AC5C Hand Scratch Brush
Stainless wire bristles for use where corrosive materials are found. 7 7/8" long.

AC58E Wire Brush
Curved scratch brush. Carbon steel bristles. 13 3/4" long.

AC64B Shoe Handle Scratch Brush
Carbon steel bristles. 10" x 1 1/16". 5" long.

AC59C Stainless-Steel Wire Brush
Curved scratch brush. Stainless-steel bristles. 13 3/4" long

AC48A

Crimped Industrial (Tempered, High Density Wire)

Stock No.	Brush Diameter, inches	Width, inches	Arbor Hole, inches	Maximum Safe Free Speed, RPM
AC48A	8	1	5/8	4,500

AC48ADAPT1 Wire Wheel Shaft Adaptor
- Adapts the AC48A to a 1" shaft

AC48ADAPT3/4 Wire Wheel Shaft Adaptor
- Adapts the AC48A to a 3/4" shaft

AC48ADAPT1

AC48ADAPT3/4

Crimped Heavy Duty (Non-tempered Wire)

Stock No.	Brush Diameter, inches	Width, inches	Arbor Hole, inches	Maximum Safe Free Speed, RPM
AC26E	6	29/32	5/8, 3/4, 1	6,000
AC28E	8	1 1/8	5/8, 3/4, 1	4,500

AC26E

Twisted Tuft

Tufts are 1 1/4" long and are twisted about 2/3 of the way.

Stock No.	Wheel Diameter, inches	Wheel Width, inches	Wire Size, inches	Arbor Hole, inches	Maximum Safe Free Speed, RPM
AC614B	6	1/2	.016	1/2, 5/8	9,000

AC614B

Encapsulated

- Individual wire tips are encased in synthetic elastomer material (gradually wears away to expose only wire tips) for consistent stiff brushing action
- Ideal for auto body and surface applications

Stock No.	Wheel Diameter, inches	Wheel Width, inches	Wire Size, inches	Arbor Hole, inches	Maximum Safe Free Speed, RPM
AC207A	2	1/4	.014	3/8, 1/2	18,000
AC217A	3	1/4	.014	3/8, 1/2	18,000

AC207A

⚠WARNING

- Do not use wire wheels above their maximum rated RPM
- Read safety precautions on pages W1 to W4

SHOP SUPPLIES: GRINDING ACCESSORIES

WD13

Grinder Accessory (Blue-Point®)

WD13 Grinder Wheel Dresser
- Helps true up grinding wheels
- Hardened and serrated steel disks
- 11" long, 1.5" diameter wheels

KNEE PADS/BACK SUPPORT

KNEEPAD2

KNEEPAD3

Kneepads

KNEEPAD2 Kneepads
- Polypropylene cap protects against floor debris
- Outer cap is securely attached to padded nylon inner pad for maximum comfort
- Extra wide Velcro® straps for easy on/off
- Lightweight

KNEEPAD3 Gel Cushioned Kneepads
- Wide neoprene rear lower flap reduces chafing
- Gel cushioned for maximum comfort
- *Velcro* straps for easy on/off, secure fit and comfort
- Hinged pad extensions for a comfortable fit

BACK1XL

BACK1LBK

Back Supports

- Curved, firm support pads help reduce back fatigue
- Unique patented lumbar pad design to firmly support the lower back
- Not a replacement for proper workplace design and proper training in lifting, twisting and bending movements

Stock No.	Size	Color
BACK1M	Medium, 31"–36" waist	Red
BACK1L	Large, 35"–40" waist	Red
BACK1XL	XL, 39"–44" waist	Red
BACK1XXL	XXL, 43"–48" waist	Red
BACK1SBK	Small, 27"–32" waist	Black
BACK1MBK	Medium, 31"–36" waist	Black
BACK1LBK	Large, 35"–40" waist	Black
BACK1XLBK	XL, 39"–44" waist	Black

MITCHELL® SERVICE PROGRAMS

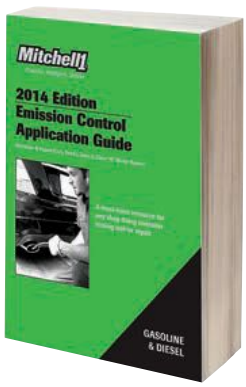

SKECAG14

*Mitchell*1 Service

SKECAG14 Emission Control Application Guide *Mitchell*1 Manual

Coverage:
1966–2014 US Cars, Light Trucks and Vans (Gasoline Engines)
1966–2014 Imported Cars, Light Trucks and Vans (Gasoline Engines)
1966–2014 US Medium and Heavy Duty (Gasoline Engines)
Class "A" Motor Homes (Gasoline Engines)
1984–2014 US and Import Cars, Light Trucks and Vans (Diesel Engines)
- Diesel Applications
- Traction Control Disable Procedures
- Comprehensive US and Import Coverage
- Emission Control Systems and Devices
- Timing Specifications
- EGR Function Testing
- EPA Emission Recalls
- Service Reminder Indicator Procedures

DIAGNOSTICS

Overview.....742

ETHOS® +.....744

VANTAGE® Ultra.....745

SOLUS™ Edge.....746

MODIS™ Ultra.....747

VERDICT®.....748

VERUS® PRO.....749

Accessories.....751

Gas Analyzer.....762

Software.....764

Heavy Duty
PRO-LINK® Ultra.....767

SOLVE COMPLEX PROBLEMS. IN A SNAP.

Who do you turn to when you need help solving complex problems? That's simple: Snap-on. Our diagnostic tools will help you quickly get to the heart of the problem, troubleshoot, and get the issue fixed correctly.
Plus, they'll save you time – and money. For diagnostics that are fantastic, we offer this simple solution: call on Snap-on.

PLATFORMS

When you need help managing the repair – and, your business – Snap-on® diagnostic tools come to the rescue. With scan tools, oscilloscopes, internet-capable multifunction tools, and more.

SCAN TOOLS — ETHOS®+ offers OEM-specific coverage for dozens of systems on over 40 makes; SOLUS™ Edge also offers access to exclusive expert tips and timesavers.

OSCILLOSCOPE — VANTAGE® Ultra puts exclusive Fast-Track® Guided Component Tests in your hands - plus the accuracy of 8 million data samples per second.

MULTIFUNCTION TOOLS — MODIS™ Ultra offers scan, scope and expert information resources in one place. VERUS® PRO adds a big 10-inch display, Windows multitasking, and the freedom of Wi-Fi and wireless scanning.

“ETHOS+ is so much more than an OBD-II code tool. When I saw how much it could do, I was sold. I started using it right away and quickly diagnosed a fuel injector problem. That made good money for me.”

Tom Dubinsky
Milwaukee, WI

Tom has:
EESC319: ETHOS®+

ETHOS® + SCAN TOOL

ETHOS+®

EESC319

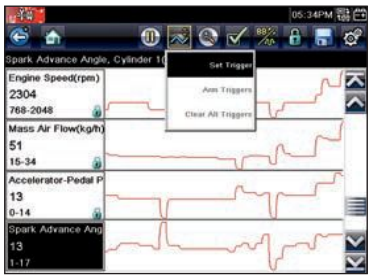

Graph up to four live data parameters at once. Set triggers to catch intermittent faults.

OEM-specific codes and live data graphing for critical vehicle systems.

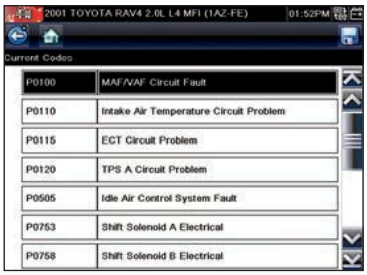

Read and clear OEM proprietary and global codes in just seconds with clear code definitions on screen.

Fast touch-screen operation for vehicle ID and navigation. Saves previous vehicles and data for review.

EESC319 *ETHOS* + Scan Tool

- OEM-specific coverage for over 40 US, Asian and (optional) European vehicles
- Effortless access to codes and data for dozens of systems
- Quick navigation with a touch of your finger, or use the four-way keypad
- Big 5 1/2" color touch screen for clear, detailed results
- Keyless data connector for all OBD-II vehicles
- Compare seven live data parameters on screen at once, or graph up to four side-by-side to isolate the root cause of vehicle problems
- Perfect for new users, service writers and as a shared tool for the entire shop
- Powers from vehicle so you can keep moving all day long. Simply connect to vehicle for automatic boot-up in 10 seconds
- Vehicle-specific code descriptions in plain English
- Covers newer technologies like TPMS, Hybrid power systems, Body controls, Suspension and Steering angle sensor
- Diagnose vehicles dating back to 1980, with optional OBD-I adapters
- Pause, record, save and play back live data
- Set min/max triggers to catch data that falls outside normal range
- Zoom in on graphs to see more detail, find glitches, nail down intermittent problems
- User-programmable shortcut key to perform frequent tasks with just one touch
- Also covers all ten modes of OBD-II. Read and clear codes, reset the MIL, view current data, determine emissions readiness, onboard monitors, ECU info, pending codes, permanent codes and more
- Internal AA battery power to review results off-vehicle
- UL® and ULC Listed

Includes:
ETHOS + scan tool, 5' data cable with keyless OBD-II connector, USB cable, padded nylon carry case, six AA batteries, AC power adaptor and Quick Start Guide

Optional Accessories

- **EESP319E European Software Activation**
- **EAK0301B07B European Vehicle Adaptor Kit**
- **EAK0301B10A OBD-I Complete Adaptor Kit**
- **EAX0068L10A Extended length 9' OBD-II Data Cable**
- **EAK0313B02A Hand Strap and Folding Stand**
- **EAC0110L35A3 Screen Protector (3-pack)**

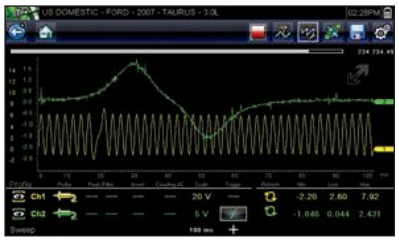

Precision high-resolution display makes it easy to see vehicle faults and component failures.

EETM309

Vehicle-specific tests for millions of component applications automatically preconfigure meter settings to save time and eliminate guesswork.

Component locator and connector diagrams show the best test locations.

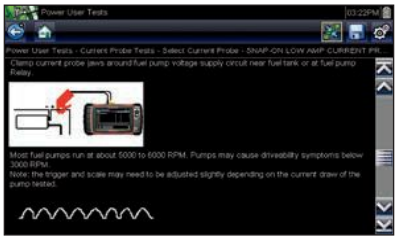

Exclusive Fast-Track® Guided Component Tests show where to test, how to connect and what to look for.

EETM309 *VANTAGE* Ultra Component Test System

- The perfect companion to any scan tool; adds confidence to any diagnosis
- High-speed lab scope, digital and graphing meter, plus expert information makes it easy to verify component faults
- Exclusive *Fast-Track* guided component tests verify component failures; with test procedures, automatic meter setup, connector diagrams, component locator and waveform library
- Test components before replacing for accurate first-time repairs
- Our fastest operating system with superfast boot-up in only 5 seconds; diagnostic results in only 30 seconds
- Easy one-touch navigation using big 8" color touch screen or keypad operation
- Vehicle-specific component tests for over 40 US, Asian and European makes, 1981–current
- PC connectivity via USB port; save, share, view, print files via ShopStream Connect™ application available at no charge
- Coverage for thousands of components on all major vehicle systems – engine, fuel, transmission, emissions, ignition, ABS, lighting, solenoids, valve train, cooling, climate, anti-theft, oxygen sensor and many more
- Save your diagnostic results and screen images on internal microSD card
- 6 million samples/sec
- 3MHz bandwidth
- Preset and custom meter settings
- Peak detect, cursors and glitch capture to help find problems other scopes miss

Includes:

- *VANTAGE* Ultra Component Test Meter
- Two shielded scope leads, probes, clips
- 110V AC power adaptor
- High energy Lithium-ion battery pack
- Soft-sided nylon carry case

Optional Accessories:

- **EETA308D Precision low-amp probe**
- **EEPV302AL Low-pressure transducer**
- **EEPV302AT Medium-pressure transducer**
- **EEPV302AH High-pressure transducer**
- **EAC0111L76A3 Screen protectors**
- **EEMS324PSA Pressure adaptor (required for pressure transducer use)**
- **SOLVANUFOAM3 Organizers for 3-series carts**
- **SOLVANUFOAM4 Organizers for 4-series carts**
- **Plus a wide range of ignition adaptors**

⚠WARNING

- Do not use in atmosphere with explosive vapor
- Read safety precautions on pages W1 to W4

SOLUS™ EDGE SCAN TOOL

SOLUS™ Edge

EESC320

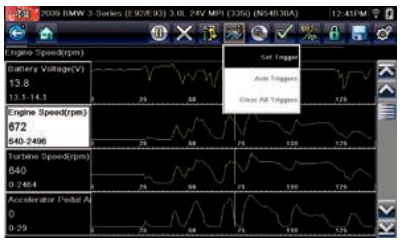

Graph up to four live data parameters at once. Catch hard-to-find faults with trigger, record, playback and scaling zoom functions.

Easily identify service items and view status. Reset service indicators after repair or service.

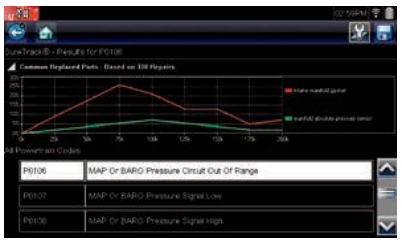

SureTrack® Expert Information System with millions of Real Fixes and verified parts replacement records harvested from successful repair orders.

EESC320 *SOLUS* Edge Full Function Scan Tool

- Wifi access to SureTrack® expert information and verified parts replacement records for a confident diagnosis
- Super-fast boot-up. Ready to use in just 5 seconds. Results in as little as 30 seconds
- Detailed trouble code definitions and live data. Plus powerful functional tests, relearns, and adaptations to control vehicle systems and validate repairs
- Large 8" touch screen display for great readability and ease of use
- Custom data lists, freeze-frame, PID sorting, pause, zoom, PID trigger and cursor functions
- Embedded SMX® Operating System dedicated to diagnostic functions for fast, reliable operation
- Fast-Track® Troubleshooter database includes vehicle-specific tips, tests, and time-savers
- Fast and easy icon navigation operates completely by touch screen, or use the four-way keypad
- Enhanced coverage for over 40 makes without the cost and complexity of factory scan tools (European coverage optional)
- OEM-specific coverage for more than 70 vehicle systems, including the new systems techs need, like hybrids, TPMS, steering, body controls, EVAP, clean diesels and more
- Print/save/share/view results on PC via ShopStream® Connect software
- Never stop to recharge – Unique steady-charge battery technology charges from vehicle power
- Includes: *SOLUS* Edge scan tool, upgradable software on microSD card, data cable for OBD-II vehicle applications, Lithium-ion battery pack, 110V AC power adaptor, USB cable for PC connection, nylon carry case, safety instructions; user manual on CD

Optional Accessories:

EESP320E European software activation
EAK0301B07B European vehicle adaptor kit
EAK0301B10A OBD-I Complete adaptor kit
EAX0068L10A Extended length 9' OBD-II data cable
EAC0111L76A3 Screen protector (3-pack)
EAZ0083L08A 8' x 2' *SOLUS* Edge shop banner

MODIS™ ULTRA MODULAR DIAGNOSTIC INFORMATION SYSTEM

EEMS328

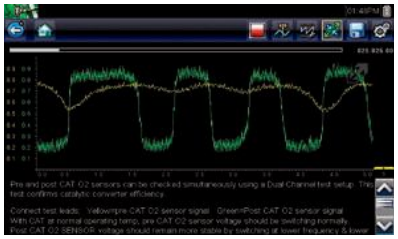

High-speed 2-channel scope with exclusive Guided Component Tests show where to connect, how to test and what results to look for.

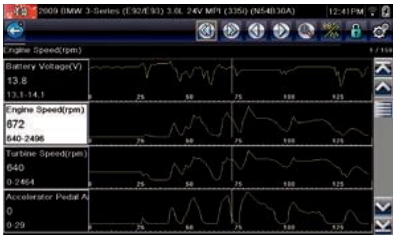

Graph up to four live data parameters at once. Customize the tool to work the way you do, with customer data lists, PID trigger and scaling zoom functions.

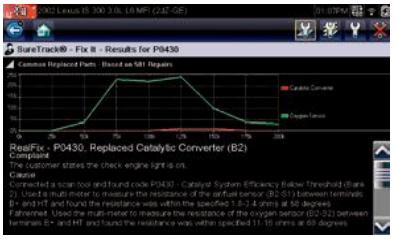

SureTrack® Expert Information System with millions of Real Fixes and verified parts replacement records harvested from successful repair orders.

EEMS328 *MODIS* Ultra Modular Diagnostic and Information System

- Integrated software suite with scan tool, lab scope, graphing meter, and expert information makes it easy to verify faults
- Super-fast boot-up in only 5 seconds; get diagnostic results in only 30 seconds
- Easy one-touch navigation using big 8" color touch screen or keypad operation
- OEM-specific scanner coverage for more than 40 domestic, Asian and (optional) European makes
- Exclusive Fast-Track® Troubleshooter tips save time and avoid comebacks
- Exclusive *Fast-Track* Guided Component Tests verify component failures with test procedures, automatic meter setup, connector diagrams and a waveform library
- Exclusive steady-charge battery technology automatically charges from vehicle connector
- A single keyless data cable for OBD-II applications saves connection time
- Unique "cause and effect" diagnostics – use powerful functional tests while viewing live data parameters on-screen
- Full scanner capabilities include coverage for vehicle-specific codes, live data, functional tests, relearns, adaptations
- Save your diagnostic results, codes, data, screen images on internal micro SD card
- PC connectivity via USB port. Save, share, view, print files via ShopStream® Connect application available at no charge
- Exclusive data graphing with glitch capture to find elusive intermittent faults
- OEM-specific coverage for 1980 and later US vehicles, 1983 and later Asian vehicles, and optional 1992 and later European vehicles
- Coverage for dozens of the most popular systems – engine, transmission, airbag, ABS, body, steering, suspension, TPMS, hybrid power, lighting, instrument, park assist, climate and many more
- Digital/graphing meter and high-speed two-channel lab scope, features:
  - 6 million samples/sec
  - 3MHz bandwidth
  - Preset and custom meter settings
  - Peak detect, cursors and glitch capture
  - Helps find problems other scopes miss
- Includes keyless universal OBD-II adaptor, two shielded scope leads with probes and clips, 110V AC power adaptor, high energy lithiumion battery pack and two custom fit organizer trays

Optional Accessories:

EESP328E European vehicle software
EAK0301B07B European vehicle adaptors
EAK0301B10A Complete OBD-I adaptor kit (17 adaptors plus jumper lead set)
EETA308D Precision low amp probe
EEPV302AL Low pressure transducers
EEPV302AT Medium pressure transducers
EEPV302AH High pressure transducers
EEMS324PSA Pressure adaptor (required for pressure transducers)
EAC0111L76A3 Screen protectors
EAK0313L05A Soft-sided nylon carry case
EAX0068L10A 9' Extended OBD-II data cable
MODISUFOAM3 Organizers for 3-series carts
MODISUFOAM4 Organizers for 4-series carts
EAZ0079L11A 8' x 2' *MODIS* Ultra shop banner

⚠WARNING

- Do not use in atmosphere with explosive vapor
- Read safety precautions on pages W1 to W4

WIRELESS MODULAR DIAGNOSTIC AND INFORMATION SYSTEMS

VERDICT™

EEMS324

High-resolution display shows detailed graphing of up to 12 data parameters for precise results.

Wireless Component Test Meter features automatic presets, guided test procedures and known good values and waveforms.

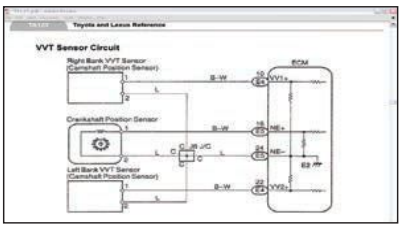

Hotlinks to Fast-Track® reference material including valuable TSBs, component locator and wiring diagrams.

EEMS324 VERDICT® Modular Diagnostic and Information System Features:

- Wireless display, scanner and meter lets technicians be in more places at once
- Real world answers in your hands from anywhere in the shop: codes, live data, bi-directional controls, *Fast-Track* guided component tests, Internet, Troubleshooter
- Integrated SureTrack® Expert Information System provides Real Fixes and verified parts replacement records harvested from successful repair orders
- OEM-specific scanner coverage for 1980–newer vehicles
- High-speed two-channel scope and graphing meter
- Keyless scanner module for quick, simple connection
- Wi-Fi and Internet browser to access web resources
- Windows® operating system
- Internal hard drive
- Touch screen operation

***VERDICT* D7 Display Tablet Features:**

- Big, bright 7" color touch screen
- *Windows* multitasking
- Internet browser and Wi-Fi
- Bluetooth® wireless communication
- One-touch navigation shortcuts
- 60GB internal hard drive
- Built-in two megapixel camera
- Lithium-Ion battery pack for up to 4 hours of continuous operation

***VERDICT* Scanner Module Features:**

- Wireless remote control from the *VERDICT* D7 Display Tablet
- Keyless adapter for OBD-II applications
- OEM-specific coverage for 40 makes (European optional)
- *Fast-Track* Troubleshooter code tips, symptom tips and repair time-savers
- *Fast-Track* database of reference values, TSBs, wiring diagrams and more
- View up to 12 live data graphs at once

VERDICT EAK0301B14A Scope/Meter Module Features:

- Standalone operation or Bluetooth connection for remote control from *VERDICT* platform
- Two-channel high-speed lab scope and digital graphing meter
- Tests V DC, V AC, ohms, continuity, capacitance, frequency, duty cycle, pulse-width and diodes
- Full-color, backlit high-resolution display for clear, precise results
- Selectable scales from 0–100 millivolt to 0–1,000V DC
- CAT III and CAT IV certification; hybrid-ready
- Scope sweep rates from 25 microseconds to 10 seconds (up to 60 minutes in DMM mode) for a wide range of applications
- High energy rechargeable NiMH battery for 8–12 hours of continuous use
- High input impedance – 10 megohm avoids risk to electronic components
- 20 megasamples per second per channel and 290 data points per screen makes it easy to catch component faults and glitches
- Bright, backlit full-color display. High-resolution 240 x 320 pixels. Graphing and digital results. Oversized digits for easy viewing at a distance
- Color-coded waveforms; two channels to compare readings from multiple components side-by-side in real time

VERUS PRO

EEMS327

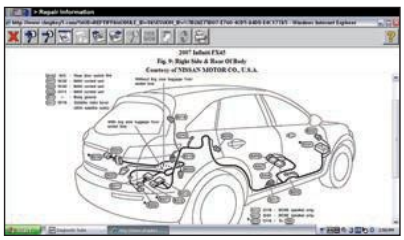

Hotlinks directly to the optional ShopKey® Repair Information system.

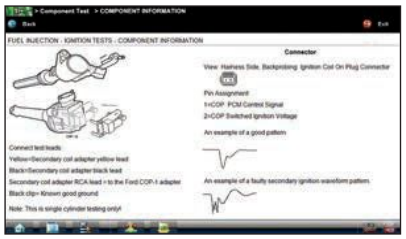

Exclusive Guided Component Tests show where to connect, how to test and what results to look for.

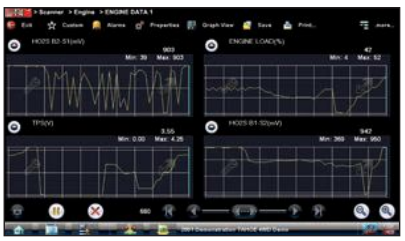

Compare from one to sixteen live data parameters on-screen at once to see root cause of vehicle faults.

EEMS327 VERUS® PRO Integrated Diagnostic and Information System Specifications

DISPLAY TABLET

- Thin profile tablet with 10" high-resolution 1024 x 600 screen
- Built-in camera to save and share photos for records
- Bluetooth® and Wi-Fi to access your web resources
- High energy Lithium-Ion battery pack for hours of continuous operation
- USB, audio and auxiliary ports make it easy to add accessories
- Big hard drive to save data and install your own applications

SOFTWARE

- Exclusive *ShopStream* integrated diagnostic suite with scanner, scope, guided component tests, optional online expert forum, vehicle records, optional *ShopKey* Repair Information
- Integrated SureTrack® Expert Information System provides Real Fixes and verified parts replacement records harvested from successful repair orders
- Genuine Windows® multitasking to view multiple applications side-by-side
- Powerful data manager saves vehicle records, photos, technician notes, screen images, scanner and scope data

SCANNER MODULE

- A single keyless adapter for OBD-II vehicle applications
- Connects wirelessly to the display tablet with *Bluetooth* for remote operation
- OEM-specific coverage for over 40 manufacturers, as far back as 1980 (European optional)
- Codes, live data, functional tests, relearns and adaptations for dozens of vehicle systems
- Exclusive Fast-Track® Troubleshooter with millions of validated code tips, symptom tips and time-savers

SCOPE MODULE

- Hot-dockable USB scope module
- High-speed four-channel lab/ignition scope and digital/graphing meter
- Six megasamples/second sample rate and glitch capture detects faults other scopes miss
- Scale range: 0–100mV to 0–400V, 50kV secondary ignition
- Sweep rate: 50 microseconds to 20 seconds (5 min in GMM mode) so you don't miss a thing
- Exclusive *Fast-Track* guided component tests for 40 US, Asian and European manufacturers
- V DC, V AC, ohms, frequency, duty cycle, pulse width, diode test and more

Includes:

VERUS PRO Display Tablet, four-channel scope module, wireless scan module, upgradable software on hard drive, keyless OBD-II data cable, OBD-I adaptor kit 1, Lithium–Ion battery pack, USB cable, 110V AC power adaptor and custom-fit organizer trays

Optional Accessories for *VERUS* PRO:

3-06206A01 Nylon stylus (3-pack)
EESP327E European vehicle software
EAA0365L04A Docking station
EAK0301B07B European vehicle adaptors
EETA308D Precision low-amp probe
EEPV302AL Low-pressure transducer
EEPV302AT Medium-pressure transducer
EEPV302AH High-pressure transducer
EEMS324PSA Pressure adaptor (required for pressure transducers)
EAC0107L17A3 Screen protectors
EAX0068L10A 9' Extended OBD-II data cable
VERUSPFOAM3 Organizers for 3-series carts
VERUSPFOAM4 Organizers for 4-series carts
EAZ0077L07A 8' x 2' *VERUS* PRO shop banner
Plus a wide range of ignition adaptors

⚠WARNING

- Do not use in atmosphere with explosive vapor
- Read safety precautions on pages W1 to W4

DIAGNOSTICS QUICK REFERENCE GUIDE

	ETHOS®+	**VANTAGE® Ultra**	**SOLUS™ Edge**	**MODIS™ Ultra**	**VERDICT®**	**VERUS® PRO**
Display screen	5.6"	8"	8"	8"	7"	10"
Choice of touch screen or keypad operation	•	•	•	•	•	•
< 10 second boot-up	•	•	•	•		
Live data graphing	4 graph		4 graph	4 graph	12 graph	16 graph
Keyless scanner adaptor	•		•	•	•	•
Wireless scanner					•	•
Battery charges from car			•	•		
WiFi access to SureTrack® Expert Information			•	•	•	•
Exclusive Fast-Track® Troubleshooter Tips			•	•	•	•
1980–newer US scanner coverage	•		•	•	•	•
1983–newer Asian scanner coverage	•		•	•	•	•
2002–newer European scanner coverage (optional)	•		•	•	•	•
Functional tests/ bidirectional controls			•	•	•	•
One-touch full-vehicle code scan and code clear	•		•	•	•	•
User-programmable function key	•	•	•	•	•	•
Save/Print/Store w/ ShopStream®-Connect PC interface	•	•	•	•		
Save/Print/Store via internal hard drive					•	•
Audio in/out, speakers, microphone					•	•
Records all PIDs – while on or off screen	•		•	•	•	•
Exclusive PID trigger	•		•	•	•	•
Adjustable PID graph scale	•		•	•	•	•
Hotkey for instant screen snapshots	•	•	•	•	•	•
Windows multitasking					•	•
Data Manager application for vehicle records					•	•
Built-in camera					•	•
WiFi-enabled			•	•	•	•
Open browser – Internet Explorer					•	•
Optional ShopKey® Repair Information System					•	•
Optional *ShopKey* Management RO Viewer					•	•
2-Channel high-speed lab scope				•	•	
4-Channel high-speed lab scope						•
Ignition scope capabilities						•
Exclusive Fast-Track® Guided Component Tests		•		•	•	•
Waveform library and known good test values		•		•	•	•

Notes:
Some functions require Internet access
Some functions not available for all vehicle makes

EAA0365L04A

EAK0301B07B

EAC0107L17A3

3-06206A01

VERUS® PRO Accessories

EAA0365L04A *VERUS* PRO Docking Station
- Convenient and secure charging station for *VERUS* PRO
- Keep your tool powered and charged up all day long – uses standard power adaptor included with *VERUS* PRO
- 15-pin video connector – to connect to your external big-screen monitor to display *VERUS* PRO results
- Built-in USB hub to connect up to four USB devices
- Multiposition stand: vertical, angle or fold to lay flat in tool storage drawer
- Simple and secure drop-in docking makes for fast grab-and-go portability

EAK0301B07B European Vehicle Adaptor Kit
- Includes data cable, VW1 adaptor, MB1 adaptor, MB2A adaptor, BM1B adaptor and keys
- Kit requires European Vehicle Software Activation

EAC0107L17A3 *VERUS* PRO Screen Protector Sheets
- Includes three screen protector sheets
- Custom-fit for *VERUS* PRO
- Easy peel-and-stick application
- Easy to replace – simply peel off old protector sheet and press on a new one
- Keeps screen clean and protected from scratches, solvents and dirt
- Helps maintain touch screen sensitivity
- Crystal-clear protection for optimum viewing in the shop or in the sun

EESP327E *VERUS* PRO European Vehicle Software Activation
- Comprehensive OEM specific coverage for servicing European makes
- Covers fault codes, live data parameters, functional tests, relearns and adaptations for dozens of vehicle systems
- Coverage for Audi®, BMW®, FIAT®, Jaguar®, Land Rover®, Mercedes®, MINI®, Porsche®, SMART®, Volvo® and Volkswagen® vehicles as far back as 1992
- Also requires: EAK0301B07B European Adaptor Kit

3-06206A01 Nylon Stylus
- High polished chrome stylus or durable black nylon stylus
- Soft tip to protect touchscreen

Optional Accessories:

3-06206A01 Nylon stylus (3-pack)
EAK0301B07B European vehicle adaptors
EETA308D Precision low-amp probe
EEPV302AL Low-pressure transducer
EEPV302AT Medium-pressure transducer
EEPV302AH High-pressure transducer
EEMS324PSA Pressure adapter (required for pressure transducers)
EAX0068L10A 9' Extended OBD-II data cable
VERUSPFOAM3 Organizers for 3-series carts
VERUSPFOAM4 Organizers for 4-series carts
EAZ0077L07A 8' x 2' *VERUS* PRO shop banner
Plus a wide range of ignition adaptors

⚠WARNING
- Do not use in atmosphere with explosive vapor
- Read safety precautions on pages W1 to W4

VERUS® ACCESSORIES

VERUS®

EAK0294B21A

EAA0354L40A

EAK0294B02A

EAE0059L07A

EAA0354L12A

2-02539A

6-06321A



EAK0253B02A

EAK0294B08A

EAC0101L69A1

VERUS Accessories

EAK0294B21A *VERUS* Wireless Conversion Kit
Wireless Scan Module adds wireless freedom and keyless simplicity to EEMS323 Diagnostic and Information System
- Simplicity, no more searching for keys. Keyless scan module covers OBD-II applications with a single adaptor
- Scan wirelessly with remote control of the Scan Module; get codes, live data, functional tests, relearns and adaptations while moving freely around the vehicle
- Includes: Wireless scan module, OBD-II data cable, data cable for adaptors, USB cable and instructions
- Note: Requires *VERUS* diagnostic unit with Software Bundle 10.4 or higher

EAA0354L40A Velcro® Handgrip
- Secure, adjustable *Velcro* strap makes it easy to hold *VERUS* diagnostic unit with one hand

EAK0294B02A Charging Station with USB Hub
- Secure benchtop WorkStation for *VERUS* diagnostic unit
- Charges *VERUS* battery when used with standard *VERUS* power adaptor
- Internal USB hub joins up to four USB devices when connected to *VERUS* diagnostic unit with standard USB cable (included)

EAE0059L07A External Battery Charger
Smart charger for up to two *VERUS* battery packs
- Automatic fast charge and trickle mode
- Includes 110V AC power supply

EAA0354L12A *VERUS* Battery Pack
- Keep a diagnostic tool on duty all day long with a spare high energy Li-ion battery
- Built-in LEDs show charge status

2-02539A 110 V AC Power Supply
- Powers *VERUS* diagnostic unit and quick charges battery pack
- Requires 6-06321A power cord

6-06321A AC Cord for 110 V Power Supply
- Line cord for AC power adaptor

EAK0253B02A Replacement Air Filters (5-pack)
- Help to keep *VERUS* electronic components cool and clean

EAK0294B08A Maintenance Kit
- Includes three screen protectors, three nylon touch screen styluses and five air filters

EAC0101L69A1 Screen Protector (3-pack)
- Crystal clear sheets protect screen from scratches, solvents and dirt
- Easy peel-and-stick application

EESP323E VERUS European Vehicle Software Activation
(Also requires: EAK0301B07B European Adaptor Kit)

EAK0301B07B European Vehicle Adaptor Kit

EAK0301B10A OBD–I Adaptor Master Kit

EAA0365L01A

EAA0365L06A

2-02839A

EAK0301L03A

EAK0301L01A1

EEMS324PSA

VERDICT Accessories

EAA0365L01A *VERDICT* Docking Station
- Convenient and secure charging station for the *VERDICT* Diagnostic System
- Keep the *VERDICT* Diagnostic System powered up and charged all day long
- Uses standard power adapter included with *VERDICT* Diagnostic System
- USB hub to connect up to four USB devices
- 15-pin video connector displays *VERDICT* results on external big screen monitors
- Multiposition stand, as an angled folding stand, laid flat to fit in tool storage drawer or in a vertical orientation

EAC0107L03A5 *VERDICT* Screen Protector
- Includes three removable screen protector sheets
- Easy peel-and-stick application
- Simply peel off old protector sheet and press on a new one
- Help to keep *VERDICT* touch screen clean and protected
- Helps maintain touch screen sensitivity
- Protects screen from scratches, solvents and dirt
- Crystal clear protection for optimum viewing inside the shop or outside in the sun

EAA0365L06A *VERDICT* Battery Pack
- Extended charge life battery pack
- Work longer without a recharge; six-cell battery offers twice the charge life of standard three-cell *VERDICT* battery
- Up to eight hours of non-stop use with *VERDICT* D7 Display
- No extra bulk, fits in the standard *VERDICT* battery slot
- Keep *VERDICT* Diagnostic System on duty all day long with a spare battery
- Li-ion battery cells for long charge life, long cycle life and quick recharge

2-02839A AC Power Supply with Cord
- For *VERDICT* D7 display (standard with *VERDICT* diagnostic unit)

EAK0301L03A Replacement Scope/Meter Test Leads
- With alligator clip set

EAK0301L01A1 AC Replacement Power Supply with Cord
- For *VERDICT* M2 meter

EEMS324PSA Pressure Transducer Adaptor *(VERDICT)*
- Adapts *VERDICT* M2 meter to EEPV302AL, EEPV302AT and EEPV302AH pressure transducers (not included)

EESP324E *VERDICT* European Vehicle Software Activation
- Comprehensive OEM specific coverage for servicing European makes
- Covers fault codes, live data parameters, functional tests, relearns and adaptations for dozens of vehicle systems
- Coverage for Audi®, BMW®, FIAT®, Jaguar®, Land Rover®, Mercedes®, MINI®, Porsche®, SMART®, Volvo® and Volkswagen® vehicles as far back as 1992
- Also requires: EAK0301B07B European Adaptor Kit

EAK0301B07B European Vehicle Adaptors

EAK0301B10A OBD-I Adaptor Master Kit

WARNING
- Do not use in atmosphere with explosive vapor
- Read safety precautions on pages W1 to W4

SOLUS ULTRA®/SOLUS™ EDGE ACCESSORIES

SOLUS Ultra®

SOLUS™ Edge

EAC0111L40A3

EAX0068L10A

EAC0111L50A1

2-04650A

2-35466A

6-06321A

SOLUS ULTRA Accessories

EESP318E Software Activation
- Comprehensive OEM-specific coverage for servicing European makes
- Covers fault codes, live data parameters, functional tests, relearns and adaptations for dozens of vehicle systems
- Coverage for Audi®, BMW®, FIAT®, Jaguar®, Land Rover®, Mercedes®, MINI®, Porsche®, SMART®, Volvo® and Volkswagen® vehicles as far back as 1992
- Also requires: EAK0301B07B European Adaptor Kit

EAC0111L40A3 Screen Protectors
- Includes three removable screen protector sheets
- Simply peel off old protector sheet and press on a new one
- Helps maintain touch screen sensitivity
- Protects screen from scratches, solvents and dirt for a clear view

EAX0068L10A Extended Length Data Cable
- Extend your diagnostic range and mobility with 9' OBD-II data cable

EAC0111L50A1 Protective Skin
- Soft, sturdy and flexible thermoplastic rubber
- Protects *SOLUS Ultra* diagnostic unit from dirt, grease and other automotive fluids; keep your tool looking like new
- Give *SOLUS Ultra* diagnostic unit a personal touch with your choice of colors
- Forms a nonslip grip over outside of your *SOLUS Ultra* platform
- Designed with access openings for screen, connectors and cooling vents for unimpeded operation

2-04650A *SOLUS Ultra* Spare Battery

2-35466A 110 V AC Power Supply
- Quick charges battery pack (power cord sold separately)

6-06321A AC Cord for 110V Power Supply
- Line cord for AC power adaptor

EAK0301B07B European vehicle adaptors

EAK0301B10A OBD-I Adaptor Kit

EAK0313L05A Soft-sided nylon carry case

SOLUS EDGE Accessories

EESP320E European Software Activation (Also requires EAK0301B07B Adaptor Kit)

EAC0111L76A3 Screen Protectors

EAX0068L10A Extended Length Data Cable

2-05450A Spare Battery Pack

EAK0301B07B European Vehicle Adaptors

EAK0301B10A OBD-I Master Adaptor Master Kit

EAZ0083L08A 8' x 2' *SOLUS* Edge Shop Banner

EAK0301B07B

EAC0110L35A3

EAK0313B02A

ETHOS+ Accessories

EESP319E European Vehicle Software Activation
- Comprehensive OEM-specific coverage for servicing European makes
- Covers fault codes and live data parameters for dozens of vehicle systems
- Coverage for Audi®, BMW®, FIAT®, Jaguar®, Land Rover®, Mercedes®, MINI®, Porsche®, SMART®, Volvo® and Volkswagen® vehicles as far back as 1992
- Also requires: EAK0301B07B European Adaptor Kit

EAC0110L35A3 Screen Guards
- Includes three screen protector sheets
- Custom-fit for the screen on *ETHOS+*
- Easy peel-and-stick application
- Simple to replace – peel off old sheet, press on a new one
- Keep your screen clean and protected from scratches, solvents and dirt for a clear view
- Helps maintain touchscreen sensitivity
- Crystal-clear protection for optimum viewing in the shop

EAK0313B02A Hand Grip and Stand Kit
- Comfortable hand strap for *ETHOS* + Scan Tool
- Makes it easy to hold and carry *ETHOS*+ with one hand
- Comfortable nylon pad for all-day use
- Adjustable hook and loop strap gives secure fit on large and small hands
- Secure mounting directly to back of *ETHOS*+ Scan Tool
- Works equally well for left- or right-hand users
- Includes folding stand

EAK0301B07B European Vehicle Adaptor Kit
- Includes data cable, VW1 adaptor, MB1 adaptor, MB2A adaptor, BM1B adaptor and keys
- Kit requires European Vehicle Software Activation

EAK0301B10A OBD-I Vehicle Adaptor Master Kit
- OBD-I Scan Adaptor Master Kit for pre-1996 US and Asian vehicles
- Complete adaptor set of all available Snap-on® OBD-I adapters for 1980–newer US and 1983–newer Asian vehicles
- Take advantage of the OBD-I scanner coverage built into your diagnostic tool
- Kit includes custom-molded organizer tray and data cable convertor, jumper lead set, ground lead, 12VDC adaptor plus 17 OBD-I adapters: Multi1, Multi2, Kia®2, Ford®1B, *Ford*4, GM®1, Toyota®1, *Toyota*2, Nissan®1, *Nissan*2, Mazda®1, Honda®1, Mitsubishi®1, Chrysler®1, *Chrysler*2, Jeep®1 and Hyundai®2
- UL® and ULC listed

HANDHELD DIAGNOSTIC ACCESSORIES

MODIS™ Ultra

EAC0111L76A3

EAC0111L51A

EAK0301B07B

MODIS™ Ultra Accessories

EAC0111L76A3 *MODIS* Ultra Screen Protectors
- Includes three screen protector sheets
- Custom-fit for the *MODIS* Ultra screen
- Easy peel-and-stick application
- Simple to replace – peel off old sheet and press on a new one
- Keep your screen clean and protected
- Helps maintain touch screen sensitivity
- Protect screen from scratches, solvents and dirt for a clear view
- Crystal-clear protection for optimum viewing in the shop or in the sun

EAC0111L51A Protective Skin
- Custom-molded to precisely fit *MODIS* Ultra
- Soft, sturdy, flexible thermoplastic rubber
- Protects tool from dirt, grease and automotive fluids – keep your tool looking like new
- Personalize your *MODIS* Ultra with a custom all-black look
- Forms a nonslip grip over outside of your *MODIS* Ultra platform
- One-piece construction – stretches for a tight fit over *MODIS* Ultra
- *MODIS* Ultra Diagnostic Tool is not included

EESP328E *MODIS* Ultra European Vehicle Software Activation
- Comprehensive OEM-specific coverage for servicing European makes
- Covers fault codes and live data parameters for dozens of vehicle systems
- Coverage for Audi®, BMW®, FIAT®, Jaguar®, Land Rover®, Mercedes®, MINI®, Porsche®, SMART®, Volvo® and Volkswagen® vehicles as far back as 1992
- Also requires: EAK0301B07B European Adaptor Kit

Optional Accessories:

2-04650A Spare Battery Pack
EETA308D Precision low-amp probe
EEPV302AL Low-pressure transducers
EEPV302AT Medium-pressure transducers
EEPV302AH High-pressure transducers
EMS324PSA Pressure adaptor (required for pressure transducers)
EAC0111L76A3 Screen protectors
EAK0313L05A Soft-sided nylon carry case
EAX0068L10A 9' Extended OBD-II data cable
MODISUFOAM3 Organizers for 3-series carts
MODISUFOAM4 Organizers for 4-series carts
EAK0301B07B European vehicle adaptors
EAK0301B10A OBD-I Complete Adaptor Master Kit
EAZ0079L11A 8' x 2' *MODIS* Ultra shop banner

Service Banners

- Shows customers your shop is equipped with the latest diagnostic and information technology to do the job right the first time
- Big, bright, full-color 8' L x 2' H shop banner
- Durable, heavy 15 oz ultra-flex vinyl with reinforced grommets for easy hanging

EAZ0042B17A SHOPKEY® Service Banner
EAZ0063L28A VERDICT® Service Banner
EAZ00075L22A SOLUS Ultra® Service Banner
EAZ0077L07A VERUS® PRO Service Banner
EAZ0079L11A MODIS™ Ultra Service Banner
EAZ0083L08A SOLUS™ Edge Banner

EAZ0042B17A

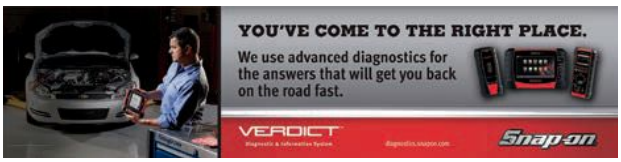

EAZ0063L28A

EAZ0075L22A

EAZ0077L07A

EAZ0079L11A

EAZ0083L08A

WARNING

- Do not use in atmosphere with explosive vapor
- Read safety precautions on pages W1 to W4

SCAN TOOL ACCESSORIES

EAK0301B10A

EAA0355L46C

EAX0066L30A

EAA0355L68A

EAK0267B01H

EAX0068L00B

Scan Tool Accessories

EAK0301B10A OBD-I Vehicle Adaptor Kit
- OBD-I Scan Adaptor Master Kit for pre-1996 US and Asian vehicles
- Complete adaptor set of all available Snap-on® OBD-I adapters for 1980–newer US and 1983–newer Asian vehicles
- Take advantage of the OBD-I scanner coverage built into your diagnostic tool
- Kit includes custom-molded organizer tray and data cable convertor, jumper lead set, ground lead, 12VDC adaptor plus 17 OBD-I adapters: Multi1, Multi2, Kia®2, Ford®1B, *Ford*4, GM®1, Toyota®1, *Toyota*2, Nissan®1, *Nissan*2, Mazda®1, Honda®1, Mitsubishi®1, Chrysler®1, *Chrysler*2, Jeep®1 and Hyundai®2
- UL® and ULC listed

EAA0355L46C Replacement OBD-II Key Adaptor
- For US and Asian vehicle applications
- Accepts "K" personality keys
- Fits VERUS®, MODIS® and SOLUS PRO™ diagnostic units

EAX0066L50A Replacement Data Cable
- For connection between scan tool and vehicle adaptors
- For *VERUS*, *MODIS*, *SOLUS PRO* and SOLUS Ultra® diagnostic units only

EAX0066L30A OBD Data Cable Extension
- Extend scan tool reach by 6'
- Fits *VERUS*, *MODIS*, *SOLUS PRO* and ETHOS® diagnostic units

EAA0355L68A DL-16 Key Adaptor-European Vehicles
- Replacement adaptor for European vehicle applications
- Accepts "S" personality keys
- Fits *VERUS*, *MODIS*, *SOLUS PRO*, SOLUS® and *ETHOS* diagnostic units

EAK0301B07B European Vehicle Adaptor Kit
- Includes data cable, VW1 adaptor, MB1 adaptor, MB2A adaptor, BM1B adaptor and keys
- Kit requires European Vehicle Software Activation

EAK0267B01H European Vehicle Keys/Adaptors Kit
- Fits *VERUS, MODIS, SOLUS, SOLUS Pro* and *ETHOS*
- European vehicle adaptor kit
- Includes VW1, MB1, MB2A, BM1B adaptors (includes keys where applicable)
- Requires European Vehicle Software Activation
- Covers the most popular 1992–newer European vehicles

EAK0294B34A Key Kit for Land Rover® vehicles
- Set of personality keys required for complete *Land Rover* coverage with *VERUS*, *MODIS*, *SOLUS PRO* and *ETHOS* diagnostic units

EAX0068L01A Replacement Data Cable for OBD-I and European Adaptor Applications
- Fits, *VERUS* PRO, *VERUS* Wireless, *VERDICT, MODIS* Ultra *SOLUS Ultra* and *SOLUS* Edge

EAX0068L00B Replacement OBD-II Data Cable
- Fits, *VERUS* PRO, *VERUS* Wireless, *VERDICT*, *MODIS* Ultra *SOLUS Ultra* and *SOLUS* Edge

EAK0253B01J Domestic/Asian Key Set
- OBD-II personality keys. Complete replacement set for US and Asian vehicle applications for *ETHOS, MODIS, SOLUS, SOLUS PRO* and *VERUS* only

EEPV302AT

EAX0024B40A

EAX0024B30A

EEMS324PSA

Pressure Transducer Kits

- Record, plot and monitor pressure in real time
- Typical applications include ABS, PS, transmissions, hydraulics and fuel systems
- *VERUS, Vantage PRO* and MODIS™ require EEMS301A05
- *VERUS* PRO, *VERDICT, MODIS* Ultra and M2 Meter require EEMS324PSA adaptor

EEPV302AL Transducer Kit (0–100 PSI)

EEPV302AT Transducer Kit (0–500 PSI)

EEPV302AH Transducer Kit (0–5,000 PSI)

EAX0024B40A Transducer "Y" Adaptor Cable

- Enables simultaneous use of two pressure transducers for multiple point comparison testing

EAX0024B30A 6' Transducer Cable Extension

- Extends the reach of EEPV302AL/AT/AH pressure transducers by 6'

EEMS324PSA Pressure Transducer Adaptor *(VERDICT)*

- Adapts standard meter jacks to EEPV302AL, EEPV302AT and EEPV302AH pressure transducers (not included)
- Provides connection of transducer plug to standard meter jacks, and provides power to the pressure transducers
- Use up to two transducers simultaneously
- View results on *VERUS* PRO, *VERDICT*, *MODIS* Ultra or M2 Meter

EETA108B

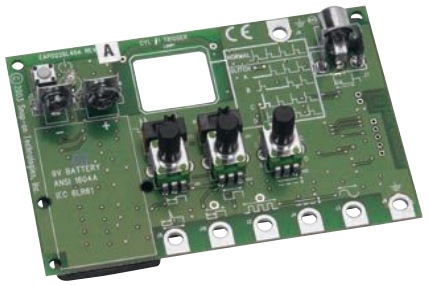

EESX306A

Scope Leads

EETA108B Extra Long Scope Lead Set (2-pack)

- 10" leads extend the reach of scope/meter leads for testing hard-to-reach components

Waveform Demonstration Tool

EESX306A Waveform Demonstration Tool

- Versatile scope training/demo tool
- Use with any scope
- Simulates good waveforms, bad waveforms and glitches
- Square wave, variable duty, FI pattern, AC signal, secondary ignition pattern
- Adjustable frequency, voltage, RPM and amplitude

SCOPE AND METER ACCESSORIES

EETA308D

EEMS301A05

Probes and Adaptors

EETA308D Low AMP Probe
- Hall effect technology gives accurate non-intrusive circuit testing
- Perform precision testing of parasitic draw, injectors, pumps, relays and more
- Spring clamp operation can test wires up to 1/2" diameter
- Scale ranges: 20 amp and 60 amp
- Resolution: +/- 1 milliamp
- Internally powered by 9V battery

EEMS301A05 Split Lead Adaptor
- Enables simultaneous use of two pressure transducers and RPM pick-up
- Fits *VERUS*, *VERUS* Wireless, *Vantage* PRO and *MODIS*

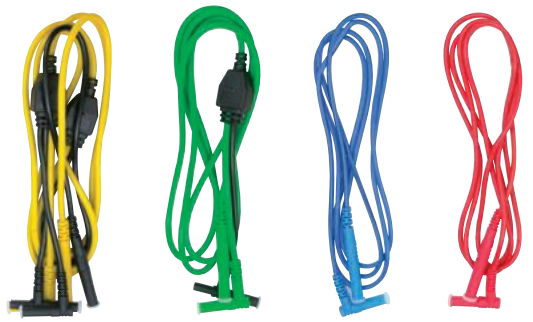

Test Leads
- Shielded, soft, flexible leads for meter and scope measurement
- Stackable, right angle ground plug attached

6-03022A Test Lead
Channel-1 (Yellow)

6-03122A Test Lead
Channel-2 (Green)

6-03222A Test Lead
Channel-3 (Blue)

6-03322A Test Lead
Channel-4 (Red)

Alligator Clips
- Spring-loaded clips provide secure, insulated connection for meter and scope measurements

2-06433A1 Alligator Clip
Black

2-06433A2 Alligator Clip
Red

2-06433A3 Alligator Clip
Blue

2-06433A4 Alligator Clip
Yellow

2-06433A5 Alligator Clip
Green

MTTL430

Adaptors and Pick-ups

MTTL430 Backprobe Adaptors (3-pack)
- Bendable stainless-steel tips for easy insertion into terminal connectors
- Three ID boot colors for quick circuit identification
- Premium component construction – stainless-steel tips, high temp composite and boot materials for long, reliable life
- Textured composite body for good grip
- Recessed loop ends for fast and reliable connection using alligator clips, grabbers or hook connections
- Removable boots enable custom color selections or restoring color to tired and dirty used boots with the MTTLBOOTS multi pack of boots
- Portable storage strip holds all three probes

Accessories shown on this page can be used on these Snap-on® Diagnostic Platforms: VERUS® / *VERUS* Wireless / *VERUS* PRO / VERDICT® / MODIS™ / *MODIS* Ultra / VANTAGE® PRO / VANTAGE® Ultra.

Multi-cylinder Secondary Ignition Scope Adaptors

Exclusive kV ignition adaptors make for easy connection and testing of secondary ignition on coil-on-plug (COP) and coil-in-cap (CIC) systems. Custom fit to vehicle ignition systems. Requires EAK0294B09A ignition scope lead kit.

EAC0056L00A

EAC0056L02A

EAC0056L03A

EAC0056L00A General-purpose COP/CIC Single-Flag Pick-up
Single-cylinder pick-up. Use with three-flag pick-up for V8 engines.

EAC0056L02A General-purpose COP/CIC Three-Flag Pick-up
Three-cylinder pick-up. Use two for V6 engines or use two with single-cylinder pick-up for V8 engines.

EAC0056L03A General-purpose COP/CIC Stick Pick-up
For inline four-cylinder engine.

Coil-on-Plug COP Ignition Coil Adaptors

EETM306A03 COP-1 Ignition Pick-up for Ford® Vehicles
EETM306A04 COP-2 Ignition Pick-up for Chrysler® Vehicles
EETM306A07 COP-3 Ignition Pick-up for VW®/Audi® Vehicles
EETM306A08 COP-4 Ignition Pick-up for Acura®/Honda®/Isuzu® Vehicles
EETM306A09 COP-5 Ignition Pick-up for Volvo®/BMW® Vehicles
EETM306A10 COP-6 Ignition Pick-up for Mercedes® Vehicles
EETM306A11 COP-7 Ignition Pick-up for *Mercedes* Vehicles
EETM306A12 COP-8 Ignition Pick-up for *BMW* Vehicles
EETM306A13 COP-9 Ignition Pick-up for Lexus® Vehicles
EETM306A14 COP-11 Ignition Pick-up for *Chrysler*/Jeep®/*Lexus*/Toyota® Vehicles

EETM306A08

EETM306A06

EETA309A15

EAK0294B09A

Coil-in-Cap CIC Ignition Coil Adaptors

EETM306A05 CIC-2 CIC Pick-up for *Toyota*/*Honda* Vehicles
EETM306A06 CIC-1 HEI CIC Pick-up for GM® Vehicles

Secondary Ignition Adaptors

EETA309A15 Sun® SIA2000 Multi-Ignition Adaptor
- Ideal for waste spark ignition systems up to eight cylinders
- Simply clamps directly to plug wires
- Also for COP/CIC systems (COP/CIC adaptors sold separately)

EAK0294B09A Ignition Scope Lead Kit
- For multi-cylinder secondary ignition testing
- Includes inductive RPM pick-up trigger, coil adaptor lead and secondary kV clip-on probe
- Ideal for distributor systems and for COP/CIC systems

Accessories shown on this page can be used on these Snap-on® Diagnostic Platforms: VERUS® / *VERUS* Wireless / *VERUS* PRO / VERDICT® / MODIS™ / *MODIS* Ultra / VANTAGE® PRO / VANTAGE Ultra.

⚠WARNING

- Do not use in atmosphere with explosive vapor
- Read safety precautions on pages W1 to W4

GAS ANALYZERS

HHGA5BP

Handheld Gas Analyzer

HHGA5BP Handheld Gas Analyzer Kit (5 Gas)
Independent Handheld 5 Gas Analyzer or use with MODIS™ Link, VERDICT® and VERUS® Bluetooth® link.

- Fully Portable 5 Gas Analyzer, go anywhere, use anywhere
- 110V AC and 12V powered
- Internal rechargeable battery, up to one hour of use
- Ideal for road testing and mobile use
- Measures exhaust emissions for CO, CO_2, HC, O_2, NOx and AFR/Lambda
- Provides an instant assessment of an engine vehicle exhaust and catalytic converter
- Add a 5 Gas Analyzer function to *MODIS*, *VERDICT* and *VERUS*-family platforms
- Setup required with included software on USB stick
- Gather all the evidence required for effective and accurate vehicle diagnostics on one screen in real time
- View, graph, save and recall data
- Monitor and reduce vehicle emissions, improve driveability and fuel efficiency
- Snap-on® HHGA5BP is truly handheld, about the size and weight of a DMM offering true portability
- Links to *MODIS*, *VERUS*, *VERDICT* and other suitable *Bluetooth* devices
- There are 255 memory locations in the analyzer to track and print data for the same or many different vehicles
- HHGA5BP is compatible with gasoline, CNG, propane and diesel fuel types
- HHGA5BP is very sensitive and pulls only 1/14 the exhaust volume of competing analyzers. This means no problems with water ingress and pumps last longer
- Annual Cal and sensor replacement. Meets required industry standard
- Diagnose a variety of driveability problems
  - Problems in ignition system (spark plugs, wires)
  - Engine compression problems
  - Temperature sensor malfunction
  - EGR Valve problems
  - Dirty air filter
  - Obstructed intake valve ports
  - Lambda Sensor failure
  - Excessive fuel consumption
  - Misfire
  - Rusted exhaust (internal or external rust)
  - Non-homologated exhaust (wrong back pressure)
  - Melted catalytic converter
  - Worn out catalytic converter
  - Obstructed exhaust or catalytic converter
- HHGA5B is the same as HHGA5BP but does not include the printer and hard shell case

TECHNICAL SUPPORT 1-888-717-1333

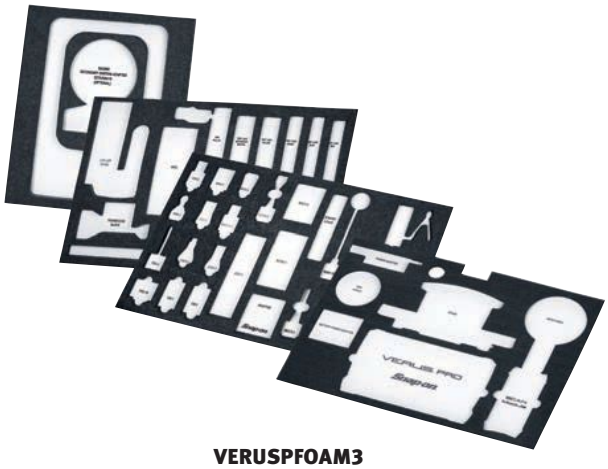

VERUSPFOAM3

SOLVANUFOAM4

Custom-Fit Foam Organizers

- Custom-4pc set of rigid foam inserts provides total organization for your tools and accessories so you always know where to find them
- Turn your tool cart into a high-end mobile diagnostic WorkStation
- Keep your diagnostic power locked, loaded and always at the ready
- Keep your valuable diagnostic investment clean, organized, secure and protected
- Dedicated locations for standard accessories, plus optional accessories like scan adaptors, scope accessories, ignition adaptors, amp probe and more

Foam Set	Diagnostic Platform Used On	Roll Carts Used On
VERUSPFOAM3	VERUS® PRO	KRSC30/31/32/33 Series
VERDICTFOAM3	VERDICT®	KRSC30/31/33 Series
MODISUFOAM3	MODUS™ Ultra	KRSC30/31/32/33 Series
SOLVANUFOAM3	SOLUS™ Ultra®/ VANTAGE™ Ultra	KRSC30/31/32/33 Series
VERUSPFOAM4	*VERUS* PRO	KRSC40/46 Series
VERDICTFOAM4	*VERDICT*	KRSC40/46 Series
MODISUFOAM4	*MODUS* Ultra	KRSC40/46 Series
SOLVANUFOAM4	*SOLUS Ultra*/ *VANTAGE* Ultra	KRSC40/46 Series
SOLVANEFOAM3	SOLUS™ Edge/ *VANTAGE* Ultra	KRSC30/31/32 Series
SOLVANEFOAM4	*SOLUS* Edge/ *VANTAGE* Ultra	KRSC40/46 Series

EAK0312L19A

EAK0313L05A

EAK0312L19A Padded Carry Case

- Provides protection and portability in the shop or on the road
- Reinforced semi-rigid nylon case with padded sides for protection of valuable diagnostic tools
- Three padded compartments for your Snap-on® diagnostic tools. Plus two elastic net compartments for accessories
- Zippered on three sides so case opens flat for easy access
- Generous 14" x 19" x 4" size holds diagnostic tool and many accessories
- Sturdy sewn-in handle and embroidered *Snap-on* logo
- Accommodates *VERUS* PRO, *VERDICT*, *MODIS* Ultra, *SOLUS* series, ETHOS® series, *VANTAGE* series tools

EAK0313L05A Compact Tote Case

- Provides protection and portability in the shop or on the road
- Compact 14" x 11" x 3" size holds diagnostic tool and some accessories
- Reinforced semi-rigid case with padded sides for protection of valuable diagnostic tools
- Tough polyester fabric with hook-and-loop straps inside to secure your tools and accessories
- Bold embroidered *Snap-on* logo shows you work with *Snap-on* quality tools
- Elastic net compartment for small accessories
- Zippered on three sides so case opens flat for easy access
- Sturdy sewn-in handle with molded comfort grip
- Accommodates *MODIS* Ultra, *SOLUS* series, *VANTAGE* series, *ETHOS* series

⚠WARNING

- Do not use in atmosphere with explosive vapor
- Read safety precautions on pages W1 to W4

SOFTWARE UPGRADES

UPGRADE

Diagnostic Software Upgrades – for VERUS®-series, VERDICT®-series, VANTAGE®-series, MODIS™-series, SOLUS™-series and ETHOS®-series tools

- Continue to improve your productivity with regularly scheduled software upgrades from Snap-on® featuring updated coverage for new vehicles, expanded coverage for earlier models and the latest enhancements that add capabilities to your tool
- You will access thousands of new vehicle systems, trouble codes and live data parameters, as well as thousands of new experience-based troubleshooter tips, functional tests, adaptations and component tests for platforms with those functions
- For details on the latest software upgrade, see your *Snap-on* representative

European Vehicle Scan Tool Software Activation for *VERUS*-series, *VERDICT*-series, *MODIS*-series, *SOLUS*-series, and *ETHOS*-series tools

- Comprehensive OEM-specific coverage is critical for servicing European makes, from fault codes and data for dozens of vehicle systems, to functional tests, relearns and adaptations for vehicles with those features
- Coverage for vehicles Audi®, BMW®, FIAT®, Jaguar®, Land Rover®, MINI®, Mercedes®, Porsche®, SMART®, Volvo®, Volkswagen® as far back as 1992
- See your *Snap-on* representative

EETA113B

EETA113B Pass Thru Pro II J2534 Reprogramming Device

- Reprogram vehicle control modules like the OEMs
- Updates software/firmware in vehicle electronic control units (ECU)
- For J2534 compliant 2004–later vehicles
- Includes OEM-approved programming interface, cables and software
- Requires Internet access, OEM data subscription and a PC
- Reprogramming requires a constant voltage supply to vehicle such as the EEBC500 Battery Charger or EECS306C D-TAC Elite (sold separately)

SHOPKEY PRO

Repair Information System
Medium Truck Repair Information
Tractor-Trailer and REPAIR>CONNECT
Service Writer/Shop Management

- The most trusted source of automotive repair information available, ShopKey® is loaded with features to make you more efficient and your repair job easier
- Access tools such as *ShopKey* live tips, enhanced TSBs, the industry's only scalable vector graphic color wiring diagrams and vintage information dating back to 1960
- Powerful 1Search™ technology delivers complete OEM and experience-based information together in a single lookup
- The new SureTrack® expert information combines exclusive diagnostic experience, parts replacement records and an interactive forum, to improve diagnostic accuracy and reduce repair time
- With *ShopKey*Pro online access you're always up to date on the latest vehicle coverage and industry changes
- Whether it's repair and estimating for Light Duty vehicles, Medium Truck, Tractor-Trailer, Service Writer or Shop Management software you're looking for, *ShopKey*Pro has you covered
- Access *ShopKey*Pro on your Snap-on® VERDICT®-or VERUS®-series tool and have the information you need to get the job done, right at your fingertips
- For details on how to make *ShopKey*Pro a part of your daily diagnostic and repair routine, see your *Snap-on* representative or visit diagnostics.snapon.com/shopkeypro

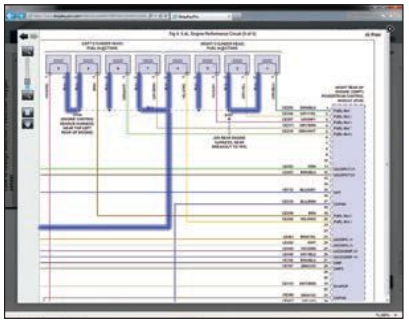

Full-color wiring diagrams with circuit highlights and zoom feature clarify even the most complex circuits.

With a single lookup you get access to illustrated repair procedures, diagnostic information, expert tips, maintenance schedules, TSBs, wiring diagrams and component locators.

OBD-II SCAN TOOLS

EESC720

EAK0302L03A

MICROSCAN® III OBD-II Scanner

EESC720 *MICROSCAN* III OBD-II Scanner

- Read and clear OBD-II codes and display live data parameters on all makes of 1996–newer vehicles in under 30 seconds
- Covers enhanced engine codes for diagnostic depth on most GM®, Ford® and Chrysler® vehicles
- Read and clear ABS codes on select *GM*, *Ford* and *Chrysler* vehicles
- Graphing display compares three live-data parameters on screen at once to see cause-and-effect of vehicle faults
- Big 4" touch screen for fast navigation; shows detailed results with clarity
- Exclusive built-in code tip database shows possible causes of engine fault codes
- Covers all ten modes of OBD-II: read codes, clear codes, reset the MIL, view current data, emissions readiness, on-board monitors, ECU information, pending codes and more
- No batteries required – powers from vehicle; simply connect *MICROSCAN* III to a vehicle for automatic boot-up
- Create custom data lists. Record, save, play back data and screen images for reference

EAK0302L03A *MICROSCAN* III OBD-1 Adaptor Kit

- Read engine codes on select pre-1996 *GM*, *Ford*, *Chrysler* and Toyota® vehicles
- OBD-I adaptors are compatible with vehicles as far back as 1983
- *Chrysler*1, *GM*1, *Toyota*1 and *Toyota*2 adaptors
- Note: For *MICROSCAN* III only. Not compatible with *Snap-on* brand scan tools

⚠WARNING

- Do not use in atmosphere with explosive vapor
- Read safety precautions on pages W1 to W4

OBD-II SCAN TOOLS

EECR1

EECR2

Car Reader Scan Tools

	Description	EECR1	EECR2
Application	Diagnostic Check Engine Lights on 1996 and Newer Vehicles	•	•
	Turns off Check Engine Light	•	•
	Works on Late Model Vehicles with C.A.N. Protocol	•	•
Unique Features	Plug-and-Play Diagnostics with All-in-One Display	•	•
	Vehicle Health Status LED Display OBD Emissions Readiness	•	•
	Hot Keys for Intuitive Navigation and Fewer Menus	•	•
	Complete Drive Cycles with Emissions Readiness Advisor	•	•
	Automatic Vehicle Idenification	•	•
	Backlit	•	•
	Diagnose & Clear ABS Light on popular 1996+ GM®, Ford®, Chrysler®, Toyota®, Honda®		•
	Battery Backup for off Vehicle Review		•
	Displays in English, Spanish and French		•
On-Board Diagnostic Features	Retrieves Manufacturer and Generic Codes		•
	Displays Enhanced Freeze Frame Data		•
	On-Screen Code Definitions in English, Spanish and French		•
	Updateable via the Web, USB Cable included		•

TECHNICAL SUPPORT: 1-877-447-6276

EECR1 CarScan-Reader
- Diagnose and turn off check engine light – works on all 1996 and newer OBD-II vehicles
- Plug-and-play diagnostics – simply plug in, tool automatically links to vehicle, then diagnostics start in seconds
- I/M readiness advisor – perform OBD-II drive and trip cycle tests to validate for accurate repairs with on-screen I/M status indicators
- Vehicle health status LEDs – know in advance if the vehicle is emission test ready (Red=Fail, Green=Pass)
- Backlit screen
- Includes EECR1-1 quick reference guide (English, Spanish, French)

EECR2 CarScan-Diagnostics
- Diagnose and turn off check engine light – works on all 1996 and newer OBD-II vehicles
- Plug-and-play diagnostics – simply plug in, tool automatically links to vehicle, then diagnostics start in seconds
- I/M readiness advisor – perform OBD-II drive and trip cycle tests to validate for accurate repairs with on-screen I/M status indicators
- Vehicle health status LEDs – know in advance if the vehicle is emission test ready (Red=Fail, Green=Pass)
- Backlit screen
- Service, diagnose engine and ABS system – read and clear anti-lock brake DTCs on 1996 and newer US, *Toyota* and *Honda*
- View freeze frame data – review a snapshot of the conditions present when the failure occurred to duplicate for advanced diagnostics. Built-in memory for off-car review
- DTC definitions displayed in English, Spanish and French
- Internet updatable via USB
- Includes EECR2-2 OBD-II cable (16-pin), EECR2-3 USB Micro Cable (48") and EECR2-4 quick reference guide (English, Spanish, French)

EEHD704004

Pro-Link Ultra Elite Diagnostic Kit

EEHD704004 *Pro-Link* Ultra Elite Diagnostic Kit

- The *PRO-LINK* Ultra Scan Tool Elite Kit is perfect for truck shops, general repair, fleet maintenance, mobile service and municipalities
- Provides OEM-proprietary diagnostics for commercial heavy duty trucks
- Tested and licensed OEM coverage for all major systems, including engines, transmissions, ABS, instrument cluster, emissions, SCR, body systems and more
- Essential maintenance functions include read and clear fault codes, access trip data to monitor vehicle and driver performance, create health reports and view live data to verify performance
- Powerful repair functions include graph live data to find tough problems, special tests to verify component failures and validate system operation, program replacement components, expanded component diagnostics and custom ECU programming configuration

TECHNICAL SUPPORT: 1-800-639-6774

KEY FUNCTIONS AND FEATURES

- Large, sharp color graphics
- Information clearly displayed
- Fast data downloads
- Portable and powerful

VIEW DIAGNOSTIC DATA

- Features 8.5" Full Color Class LED Sun Light Readable Display

PRINT

- Print vehicle reports and information gathered from your diagnostic session to a printer

EEHD704004 includes:

- *PRO-LINK* Ultra Heavy Duty Diagnostic System
- 8' data cable, 16-Pin J1962 OBDII adaptor, 9-pin Deutsch® adapter, 6-pin *Deutsch* adaptor, GM® 12-pin adaptor, PLC adaptor
- Hard shell carrying case with cushioned foam organizer
- Complete guide book of fault code descriptions
- High-energy Lithium-ion battery pack
- 120V AC power adaptor
- Please see chart on the next page for included software

⚠WARNING

- Do not use in atmosphere with explosive vapor
- Read safety precautions on pages W1 to W4

PRO-LINK® ULTRA HEAVY DUTY VEHICLE DIAGNOSTICS

EEHD184040

Pro-Link Ultra Kit Components

EEHD184040 *Pro-Link* Ultra Starter Diagnostic Kit

- Smarter. Easier. Essential. The recognized standard in diagnostic scan tools
- The *PRO-LINK* Ultra Scan Tool Starter Kit is perfect for truck shops, general repair, fleet maintenance, mobile service and municipalities
- Provides OEM-proprietary diagnostics for commercial heavy duty trucks
- Tested and licensed OEM coverage for all major systems, including engines, transmissions, ABS, instrument cluster, emissions, SCR, body systems and more

TECHNICAL SUPPORT: 1-800-639-6774

KEY FUNCTIONS AND FEATURES

- Large, sharp color graphics
- Information clearly displayed
- Fast data downloads
- Portable and powerful

EEHD184040 includes:

- *PRO-LINK* Ultra Heavy Duty Diagnostic System
- 8' data cable, 16-pin J1962 OBDII adaptor, 9-pin Deutsch® adaptor, 6-pin *Deutsch* adaptor
- Semi-hard shell carrying case with cushioned foam organizer
- Complete guide book of fault code descriptions
- High-energy Lithium-ion battery pack
- 120V AC power adapter

	Stock No.	Description	EEHD704004 *PRO-LINK* Ultra Elite Kit	EEHD *PRO-LINK* Ultra Starter Kit
Software	**EEHD864007**	Heavy Duty Standard J1939 Medium and Heavy Duty Trucks with EPA '10 2004–2014	•	•
	EEHD864008	Heavy Duty Standard J1708 Medium and Heavy Duty Trucks 1987–2012	•	•
	EEHD864076	OBD-II / EOBD–Light and Medium Duty Trucks 1996–2014	•	•
	EEHD864024	CAT® ACERT™ v2.0 2003–2009	•	
	EEHD864027	Caterpillar® Electronic Engines 1990–2003	•	
	EEHD864010	International® Engines 1,2,3 Box 1994–2006	•	
	EEHD864009	Navistar® MaxxForce® v2.0 2007–2012	•	
	EEHD864015	DDEC II, III, IV, V v2.0 1987–2006	•	
	EEHD864018	DDEC 6, 10, 13, MBE 2007–2013	•	
	EEHD864031	DDEC MBE 2001–2006	•	
	EEHD864005	Allison® Transmission Suite GEN IV, 1K/2K, WTEC,CEC1	•	
	EEHD864013	Bendix® Air ABS	•	
	EEHD864014	Meritor® WABCO Air and Hydraulic ABS	•	
	EEHD864021	Trailer ABS Suite Wabash®, Haldex® and Eaton®	•	
	EEHD864048	Enhanced Ford®, GM® and Isuzu® engines	•	
Adaptors	**EEHD493013**	J1962 Adaptor (16-pin)	•	•
	EEHD493024	6-pin Deutsch® adaptor	•	•
	EEHD493028	9-pin *Deutsch* adaptor (Non-Locking)	•	•
	EEHD493003	*GM* 12-pin adaptor	•	
	EEHD602020	PLC Converter (required for newer trailers)	•	
Optional Scan Tool	**EEHD183030S**	Pocket iQ™ with EOBD-II and HDS update		
	EEHD181030S	*Pocket iQ* with OBD-II		

PRO-LINK Ultra software listed above is not backwards compatible to older *PRO-LINK* iQ® platforms

PRO-LINK Ultra Software/Engine Applications

Stock No.	Description
EEHD864009	*Navistar MaxxForce* v2.0 2007–2012
EEHD864010	*International* Engines 1,2,3 Box 1994–2006
EEHD864015	DDEC II,III,IV,V v2.0 1987–2006
EEHD864024	*CAT ACERT* v2.0 2003–2009
EEHD864027	*Caterpillar* Electronic Engines 1990–2003
EEHD864018	DDEC 6,10,13, MBE 2007–2013
EEHD864031	DDEC MBE 2001–2006

PRO-LINK Ultra Software/Brake Applications

- Heavy Duty ABS applications provide diagnostic ABS information for both tractors and trailers
- They allow viewing of proprietary information and running of special tests

Stock No.	Description
EEHD864013	Bendix® Air ABS
EEHD864014	*Meritor* WABCO Air and Hydraulic ABS
EEHD864021	Trailer ABS Suite *Wabash*, *Haldex* and *Eaton*

PRO-LINK Ultra Software/LMT Applications

Stock No.	Description
EEHD864048	Enhanced *Ford*, *GM*, and *Isuzu* engines

EEHD864048 *PRO-LINK* Ultra Software for Light/Medium Duty Trucks (LMT) 2012

- Features enhanced coverage for gas and diesel engines, including *Ford* 7.3, 6.4 and 6.0 Liter Powerstroke®; *GM* and *Isuzu* 8.1 Liter, 6.6 Liter Duramax®, 7.8 Liter Diesel and 5.2 Liter Diesel
- Plus Transmissions and ABS coverage for *GM* C1500–C7500, T4500–T7500, P chassis and Workhorse; *Ford* F250–F750, E250–E450; *Isuzu* (NPR/NF3, NQR/NRR) truck

PRO-LINK Ultra Software/ Transmission Applications

- Heavy Duty Transmission applications allow viewing of proprietary information and the running of special tests

Stock No.	Description
EEHD864005	*Allison* Transmission Suite GEN IV, 1K/2K, WTEC,CEC1

PRO-LINK Ultra Software/HDS Applications

- Snap-on® offers Heavy Duty Standard (HDS) generic applications covering engines, transmissions, and brakes that provide access to limited, non-proprietary diagnostic information
- HDS Capabilities:
  - –Read active fault codes
  - –Read and clear inactive fault codes
  - –View non-proprietary parameters
  - –Read trip information
- Heavy duty standard software listed below is included with the *PRO-LINK* Ultra Scan Tool

Stock No.	Description
EEHD864007	Heavy Duty Standard J1939 Medium and Heavy Duty Trucks with EPA '10 2004–2014
EEHD864076	OBD-II / EOBD–Light and Medium Duty Trucks 1996–2014
EEHD864008	Heavy Duty Standard J1708 Medium and Heavy Duty Trucks 1987–2012

⚠WARNING

- Do not use in atmosphere with explosive vapor
- Read safety precautions on pages W1 to W4

PRO-LINK® ULTRA HEAVY DUTY VEHICLE DIAGNOSTICS

EEHD493001

EEHD493003

EEHD493013

EEHD493015

EEHD493024

EEHD493026

EEHD493028

EEHD493014

EEHD493033

EEHD494099

EEHD424001

EEHD602020

EEHD494094

EEHD403098

EEHD903008

EEHD213011

EEHD214006

EEHDULTRAFOAM

EEHD1402813

EEHD4001-022

EEHD4001-023

PRO-LINK Ultra Adaptors, Cables and Accessories

Stock No.	Description
EEHD493001	9-pin Deutsch® adaptor (Locking)
EEHD493003	GM® 12-pin adaptor
EEHD493013	J1962 Adaptor (16-pin)
EEHD493015	Caterpillar® 9-pin Adaptor
EEHD493024	6-pin *Deutsch* adaptor
EEHD493026	Data cable
EEHD493028	9-pin *Deutsch* adaptor (Non-Locking)
EEHD493014	Adaptor for *Caterpillar* T 9-pin
EEHD493033	Adaptor for 3-pin *Deutsch*, 2-pin Cummins®
EEHD494099	AC adaptor
EEHD424001	J560 PLC cable set
EEHD602020	PLC Converter (required for newer trailers)
EEHD494094	HDMI® Cable
EEHD403098	USB Cable
EEHD903008	Fault Code Guide
EEHD213011	Carrying case
EEHD214006	Rugged Ultra Case
EEHDULTRAFOAM	Extreme Carrying Case Foam Insert
EEHD1402813	Stylus pens (3-pack)
EEHD2450801A	1 Screen protector
EEHD4001-022	2,400mAH Battery
EEHD4001-023	4,800mAH Battery

EEHD183030S

Pocket iQ Heavy Duty Scan Tool

Stock No.	Description
EEHD181030S	*Pocket iQ* with OBDII
EEHD183030S	*Pocket iQ* with EOBDII and HDS update

EEHD181030S *Pocket iQ* Heavy Duty Scan Tool

- The *Pocket iQ* – A generic scan tool for all commercial vehicles from light duty to Class 8 trucks. The *Pocket iQ* provides the following support for:
  – Medium and Heavy Duty Trucks J1708 and J1939
  – Light Duty Trucks OBD-II
- Medium and Heavy Duty Truck – The *Pocket iQ* reads active fault codes, reads and clears inactive fault codes, and monitors J1708 and J1939 engine, brake and transmission data
- Light Duty Truck – Reads active fault codes, reads and clears inactive fault codes and monitors OBD-II engine data
- Reporting Tools – Enables technicians to save vehicle diagnostic and fleet performance information on the device in a PDF or text format. Once saved, the reports can be printed from the *Pocket iQ* to a standard PCL3 printer or transferred to a memory stick (stick sold separately)
- Upgradeable – The *Pocket iQ* USB port allows for future updates/upgrades, and provides the ability to download reports to your memory stick

TECHNICAL SUPPORT: 1-800-639-6774

EEHD181030S/EEHD181030S Includes:

- **Stylus Pen**
- **EEHD181030PB Soft Case for *Pocket iQ***
- **EEHD501002 Power and Data Cable**
- **EEHD488024 6-pin Deutsch® Adaptor**
- **EEHD488028 9-pin *Deutsch* Adaptor**
- **EEHD481013 OBD-II Adaptor**
- **EEHD403098 USB Cable**
- **EAK0276B02A AC/DC Adaptor, 1.5 amp 12V**
- **EEHD181030-2 Battery Pack**
- **SS3241 Instructional DVD**

⚠WARNING

- Do not use in atmosphere with explosive vapor
- Read safety precautions on pages W1 to W4

POCKET IQ™ HEAVY DUTY VEHICLE DIAGNOSTICS

EEHD692020

EEHD692021

Pocket iQ Software

EEHD693010 *Pocket iQ* Lite Application for International®/Navistar® Engines
- Read proprietary data and fault codes on *International* 1,2,3 box engines as well as *Navistar* MaxxForce® engines
- Program idle shutdown time
- Enable and Disable idle shutdown timer
- Program Max Vehicle Road speed limits
- Run Cylinder Cutout Test
- Program Min and Max cruise control
- DPF Regen for cleaning of the diesel particulate filter on *MaxxForce* engines
- Read, save and clear fault codes
- Read and save vehicle trip information
- Read live vehicle data
- Create vehicle "health" reports
- Includes the *Pocket iQ* Scan Tool

Applications
International 1,2,3 Box (1994–2006)
Navistar MaxxForce (2007–2013)

EEHD693010SO *Pocket iQ* Lite Application for *International/Navistar* Engines
- Same as EEHD693010 but does not include the *Pocket iQ* Scan Tool
- Software only

EEHD693015 *Pocket iQ* Lite Application for DDEC Engines
- Read proprietary data and fault codes on Detroit Diesel® EC engines
- Program idle shutdown time
- Enable and Disable idle shutdown timer
- Program Max Vehicle Road speed limits
- Program Min and Max cruise control
- Run Cylinder Cutout Test
- DPF Regen for cleaning of the diesel particulate filter
- *Detroit Diesel*/MBE (900, 4000) DDEC. II, III, IV and V engines 6, 10, 13
- Read, save and clear fault codes
- Read and save vehicle trip information
- Read live vehicle data
- Create vehicle "health" reports
- Includes the *Pocket iQ* Scan Tool

Applications
- DDEC II, III, IV, V, 6, 10, 13 (1989–2013)
- DDEC MBE (2001–2006)

EEHD693015SO *Pocket iQ* Lite Application for DDEC Engines
- Same as EEHD693013 but does not include the *Pocket iQ* Scan Tool
- Software only

EEHD693024 *Pocket iQ* Lite Application for Caterpillar® Engines
- Read proprietary data and fault codes on *Caterpillar* Electronic and CAT® ACERT™ engines
- Program idle shutdown time
- Enable and disable idle shutdown timer
- Program max vehicle road speed limits
- Program min and max cruise control
- Run cylinder cutout test
- Read, save and clear fault codes
- Read and save vehicle trip information
- Read live vehicle data
- Create vehicle "health" reports
- Includes the *Pocket iQ* Scan Tool

Applications
- *Caterpillar* Electronic Engines (1990–2002)
- *CAT ACERT* (2002–2009)

EEHD693024SO *Pocket iQ* Lite Application for *Caterpillar* Engines
- Same as EEHD693024 but does not include the *Pocket iQ* Scan Tool
- Software only

EEHD693004 *Pocket iQ* All Engines Software Suite
- Includes the *Pocket iQ* Scan Tool, EEHD639010SO *International*/*Navistar* Engine Software, EEHD693015SO DDEC Engine Software and EEHD693024SO *Caterpillar* Engine Software

EEHD693004SO *Pocket iQ* All Engines Software Suite
- Includes the EEHD639010SO *International/Navistar* Engine Software, EEHD693015SO DDEC Engine Software and EEHD693024SO *Caterpillar* Engine Software
- Does not include the *Pocket iQ* Scan Tool
- Software only

EEHD893000U HDS OBD II/EOBD Software Update
- Heavy Duty Standard suite upgrade provides the functions necessary to diagnose J1708 AND J1939, EPA '07, EPA '10 and newer electronic controlled engines

EEHD892021 Tractor-Trailer ABS Software
- EEHD892021 ABS Suite Coverage
  - Bendix®
  - Meritor WABCO® Air and Hydraulic
  - Wabash National® MBS-1P and MBS-2
  - Eaton® GEN4 & GEN5;
  - Haldex® PLC, PLC Plus, PLC Select
- Required Item
  - This brake software is for the: *Pocket iQ* EEHD181030S or EEHD183030S (sold separately)

EEHD692020 Tractor-Trailer ABS Software Kit
- Includes EEHD892021 ABS Software Suite and EEHD602020 J560 PLC Adaptor

EEHD692021 Tractor-Trailer ABS Software Kit
- Includes *Pocket iQ* Scan Tool, EEHD892021 ABS Software Suite and EEHD602020 J560 PLC Adaptor

TECHNICAL SUPPORT: 1-800-639-6774

Pro-Link iQ Software/Engine Applications

Stock No.	Description
EEHD883018	DDEC IV, 10, 13 / MBE 2007–2013
EEHD883018U	DDEC VI,10,13 V2.0 Upgrade 2007–2013*
EEHD883015	DDEC Suite II, III, IV, V 1987–2006
EEHD883015U	DDEC Suite II, III, IV, V 1987–2006 Upgrade*
EEHD889031	DDEC MBE 2001–2006
EEHD880024	CAT ACERT™ v2.0 2003–2009
EEHD880024U	*CAT ACERT* v2.0 Upgrade* 2003–2009
EEHD889024	Caterpillar® EE 1990–2003
EEHD883009	Navistar® MaxxForce® v2.0 2007–2012
EEHD883009U	*Navistar MaxxForce* v2.0 Upgrade* 2007–2012
EEHD880010	International® Engines v2.0 1994–2006
EEHD880010U	*International* Engines v2.0 Upgrade 1994–2006*

This *Pro Link iQ* software is not forward compatible to the *Pro-Link* Ultra.
*Owners of previous version of software can purchase upgrade.

iQ™ Software/Heavy Duty ABS Applications

- Software allows user to interface with the tractor ABS, trailer ABS and the PLC
- Reads current and historic fault codes
- Reads current brake data
- Clears current and historic fault codes
- Tests the Tractor-Trailer interface
- Automatically detects and reads the OEM's ECU brake system configuration
- Actuates modulators and valves
- Cycles brake retarder relays
- Tests wheel sensors and traction disabling
- Reads the trailer ECU data (odometer, trip odometer)
- Tests the trailer "ABS Warning" lamp
- Checks battery voltage to the trailer

Stock No.	Description
EEHD888014	Meritor Wabco® Air and Hydraulic
EEHD889013	Bendix® Air ABS
EEHD882021	Trailer ABS Suite Wabash®, Haldex®, Eaton®

iQ Software/Transmission Applications

Stock No.	Description
EEHD883005	Allison® Transmission® Suite GEN IV, 1K/2 WTEC, CEC1
EEHD883005U	*Allison Transmission* Suite Update*

Heavy Duty Standard Applications

Snap-on® offers Heavy Duty Standard (HDS) generic applications covering engines, transmissions and brakes that provide access to limited, non-proprietary diagnostic information.

HDS capabilities:
- Read active fault codes
- Read and clear inactive fault codes
- View non-proprietary parameters
- Read trip information

Stock No.	Description
Included	Heavy Duty Standard J1708 Medium and Heavy Duty Trucks 1989–2012
EEHD883007 (included)	Heavy Duty Standard J1939 Medium and Heavy Duty Trucks with EPA '10 2004–2013
EEHD883007U	Heavy Duty Standard J1939 Medium and Heavy Duty Trucks with EPA '10 Update*

Light and Medium Truck (LMT) Applications

- Features enhanced coverage for gas and diesel engines, including Ford® 7.3, 6.4 and 6.0 Liter Powerstroke®; GM® and Isuzu® 8.1 Liter, 6.6 Liter Duramax®, 7.8 Liter Diesel and 5.2 Liter diesel engines
- Plus Transmissions and ABS coverage for *GM* C1500–C7500, T4500–T7500, P chassis and Workhorse; *Ford* F250®–F750®, E250®–E450®; *Isuzu* (NPR/NF3, NQR/NRR) trucks

Stock No.	Description
EEHD883048	Light and Medium Truck (LMT) Enhanced *Ford*, *GM* and *Isuzu* trucks 2001–2012
EEHD883048U	Light and Medium Truck (LMT) Enhanced *Ford*, *GM* and *Isuzu* trucks 2001–2012 Update*
EEHD883076 (included)	OBD-II / EOBD Light and Medium Duty Trucks 1996–2013

⚠WARNING • Read and follow all safety precautions in instructions and on pages W1 to W4 when using diagnostic equipment

PRO-LINK® iQ SCAN TOOL SOFTWARE AND ACCESSORIES

EEHD488024

EEHD482028

EEHD481009

EEHD481013

EEHD488099

EEHD481003

EEHD483023

EEHD401013

EEHD401014

EEHD401015

EEHD401012

EEHD421001

EEHD501002

EEHD501003

EEHD501004

EEHD602020

EEHD210007

EEHD219006

EEHD219006-1

EEHD1402813

EEHD2450801A

EEHD4001018

EEHD4001019

Pro-Link iQ Adaptors, Cables and Accessories

The cables included with the *PRO-LINK* iQ scan tool kits meet the needs of most customers. Please contact Snap-on® technical support, 1-800-639-6774, for information and assistance regarding the need for any additional cables.

Stock No.	Description	Stock No.	Description
EEHD488024	6-pin Deutsch® adaptor	EEHD501002	Power and data cable
EEHD482028	9-pin *Deutsch* adaptor	EEHD501003	Data cable
EEHD481009	HD/J1962 adaptor	EEHD501004	Power cable
EEHD481013	OBD II 1962 adaptor	EEHD602020	PLC Converter (required for newer trailers)
EEHD488099	AC adaptor	EEHD210007	Carrying case
EEHD481003	12-pin adaptor	EEHD219006	Extreme carrying case
EEHD483023	Atari® 15P to Volvo® 16-pin cable	EEHD219006-1	2pc Protective Foam-1
EEHD401013	Adaptor for 2-pin Cummins®	EEHD1402813	Stylus pens (3-pack)
EEHD401014	Adaptor for Caterpillar® T 9-pin	EEHD2450801A	1 Screen protector
EEHD401015	Adaptor for 9-pin *Deutsch* (CAT)	EEHD4001018	2-cell battery pack
EEHD401012	Adaptor for 8-pin AMP	EEHD4001019	4-cell battery pack
EEHD421001	J560 PLC cable		

Personality Keys

Use this chart to identify and order keys when upgrading your customers from their current software version to the newest one.

Upgrade	Domestic and Asian	Most common make supported	Part number	European	Most common make supported	Part number
14.2				S-26	Porsche®	EAP0283L40A
13.4				S-53	FIAT®	EAP0268L50A
13.2	K-30	Subaru®	EAP0283L30A			
12.4	K-29	GM® Extended CAN	EAP0283L20A			
12.2						
11.4						
11.2	K-28	Nissan® Altima® Hybrid	EAP0283L10A	S-69	Volvo® Dual CAN	EAP0283L05A
				S-25 S-40 S-43 S-44 S-45 S-62	Land Rover® *Land Rover* *Land Rover* *Land Rover* *Land Rover* *Land Rover*	MT2500S25A EAP0234E20A EAP0234E40A EAP0234E50A EAP0234E55A EAP0268L55A
10.2						
9.4						
9.2	K-7A K-27	Chrysler®/Mitsubishi® *Chrysler*/*Mitsubishi*	EAP0268L65A EAP0268L75A	S-64	Mercedes-Benz®	EAP0268L70A
8.4						
8.2						
7.4				S-51	*Mercedes-Benz*	EAP0268L35A
7.2	K-20 K-25	Global OBD-II CAN *Chrysler*	EAP0234E45A EAP0268L15A	S-44	Volkswagen®	EAP0234E50A
6.4	K-24	Honda®	EAP0268L05A			
6.2	K-21 K-22	*General Motors* *Chrysler*	EAP0234E80A EAP0234E90A			
5.4						
5.2	K-19	CAN Protocol Vehicles	EAP0234E35A			
4.4	K-17	Ford®/*GM*/Toyota®/ *Nissan*/Mazda®/Hyundai®/ Kia®/*Mitsubishi*	EAP0234E25A			
4.2	K-16	*Ford*	EAP0257B00A			
4.1 and earlier	K-2A* K-5A K-7* K-9 K-12A K-13 K-14 K-15	OBD-II *Hyundai* *Mitsubishi* *General Motors* *General Motors* *Chrysler* *Nissan* *Mitsubishi*	MT50780202 MT50780507 MT50780701 MT50780901 MT50781202 MT50781301 MT50781401 MT50781501	S-4 S-7 S-17 S-20 S-21 S-27 S-28 S-33 S-34	*Mercedes-Benz* *Volkswagen/* BMW®/*Land Rover* *Mercedes-Benz* *Mercedes-Benz* *Mercedes-Benz* *Mercedes-Benz* *BMW/Land Rover* *Mercedes-Benz* *Mercedes-Benz*	MT2500S4 MT2500S7 MT2500S17 MT2500S20 MT2500S21 MT2500S27 MT2500S28 MT2500S33 MT2500S34

* Some Personality Keys may work with manufacturers other than shown in the chart. Always refer to the scan tool for the correct Personality Key. The scan tool will always prompt for the correct Personality Key after the VIN has been entered and the system selected.

WARNING
• Do not use in atmosphere with explosive vapor
• Read safety precautions on pages W1 to W4

Important Words
About Safety
for Users and Bystanders

Following these basic safety rules is a good start toward protecting yourself — and others in the vicinity — from injury while using tools.

Wear safety goggles
Use the right tool
Use the tool properly
Maintain the tool regularly
Keep tools away from children
Do not use tools on live electrical circuits unless specifically designed for such use
Read and follow instructions

*
THIS SYMBOL INDICATES PROHIBITED ACTION

DO NOT OVER-TORQUE NO PIPES OR LEVER EXTENSIONS

NO HAMMERING

NO PRYING

DO NOT STRIKE HARD OBJECTS

NO IMPACT/POWER DRIVE

DO NOT STEP IN OR ON DRAWERS

DO NOT OPEN MULTIPLE DRAWERS

DO NOT PULL TO MOVE

KEEP CHILDREN AWAY

*
THIS SYMBOL INDICATES MANDATORY ACTION

*
MUST READ INSTRUCTIONS BEFORE USE

*
MANDATORY EAR PROTECTION

*
MANDATORY EYE PROTECTION

*
MANDATORY PROTECTIVE GLOVES

*
MANDATORY PROTECTIVE CLOTHING

*
MANDATORY FACE SHIELD

*
MANDATORY HEAD PROTECTION

*
MANDATORY MASK

*
MANDATORY RESPIRATOR

*
THIS SYMBOL INDICATES A HAZARD ALERT, GENERAL WARNING SIGN

*
RISK OF EXPLOSION

*
RISK OF ELECTRIC SHOCK

*
RISK OF FIRE

RISK OF ENTANGLEMENT

VIBRATION HAZARD

OVERHEAD/OVERLOAD HAZARD

*These symbols are excerpted from ISO 7010: 2011 with the permission of ANSI on behalf of ISO.
© ISO 2014–All rights reserved

Safety messages in this catalog use the guidelines of the American National Standard ANSI Z535.4 for Product Safety Signs and Labels and ANSI Z535.3 Criteria for Safety Symbols. Messages associated with specific products use a triangular hazard alert symbol, signal word (CAUTION, WARNING, DANGER) and how to avoid the hazard. Each message refers to pages (W1 to W4) which provide additional safety symbols and three-part messages advising of:

- The hazard

How to avoid the hazard
The probable consequence of not avoiding the hazard

PLEASE READ AND FOLLOW these messages to avoid injury to yourself and bystanders.

Adaptors

⚠WARNING

• Adaptors can break from over-torque
Do not use with impact drivers.
Do not exceed the torque stamped on adaptor.
Broken adaptor can cause injury.

AVR Battery Testers

⚠WARNING

• Batteries produce explosive gases and can explode and ignite
Wear safety goggles (user and bystanders).
Keep flames and sparks away from batteries.
Battery explosion and Ignited gases can cause injury.

Battery Chargers, Testers (AVR), Portable Booster Packs

⚠WARNING

• Batteries produce explosive gases and can explode
Wear safety shield (user and bystanders).
Do not overcharge battery.
Keep flames and sparks away from batteries.
• Sparks occur when connecting or disconnecting leads while charger is ON
Charger must be OFF when connecting or disconnecting leads.
Do not allow leads on Booster Packs to contact each other.
Battery explosion or ignited gases can cause injury.

Blow Guns

⚠WARNING

• Blow guns create flying particles, noise and high velocity air
Wear safety shield or goggles (user and bystanders).
Wear mask if air is dusty (user and bystanders).
Wear hearing protection (user and bystanders).
Do not direct air at yourself or bystanders.
Keep out of reach of children.
VENTED: Do not use if air supply is above 135 psig. Do not obstruct vents.
NON-VENTED: Do not use if air supply is above 30 psig.
Flying particles, noise and high velocity air can cause injury.

Brake Tools

⚠WARNING

• Brake cylinder hones can fly apart if used outside cylinder
Wear safety goggles (user and bystanders).
Operate only while hone is within cylinder.
Flying parts can cause injury.

Butane Mini-Torches

⚠WARNING

• Butane can explode
Store at a temperature below 120 °F.
Dispose of butane in accordance with regulations.
Explosion or flames can cause injury.

Compressors

⚠WARNING

• Air compressors have electrical parts, moving parts and contain high pressure air that may be impure
Read and follow all instructions.
Do not use as an air supply for breathing.
Improper use or maintenance can cause shocks, entanglement or injury.
• Compressor systems contain air under pressure which can create a high pressure stream or ruptured vessel
Wear safety goggles (user and bystanders).
Relieve pressure before servicing.
Do not modify/repair/rework pressure vessel or change safety relief pressure setting.
A pressurized air stream or rupturing pressure vessel can cause injury.
• Moving components inside
Do not use without all guards in place.
Moving components can cause injury.
• High voltage will create an electrical shock
Disconnect all power before servicing.
High voltage can cause injury.

Cordless Tools

⚠WARNING

• Battery packs present a risk of fire, explosion and electric shock
Charge battery pack only with charger provided.
Do not store battery packs at temperatures above 120 °F (49 °C).
Do not discard used batteries; return them to a Snap-on® repair center for recycling.
Follow all safety messages in user's manual.
Fire or explosion or electric shock can cause injury.
• Sparks from electric motor can ignite an atmosphere containing flammable vapor
Do not use cordless tools in a volatile atmosphere
Fire and/or explosion can cause serious injury.

Diagnostic Equipment

⚠WARNING

• Use of diagnostic equipment on rotating engine poses risk of flying particles and entanglement
Wear safety goggles.
Use caution in routing cables.
Flying particles can cause injury.
Poorly routed cables and test leads can cause entanglement and injury.
• Use of diagnostic equipment can cause electrical shock, fire and explosion.
Use caution and proper procedures when connecting and disconnecting leads.
Diagnostic equipment must be located 18" or more above floor level.
Avoid sparks and other sources of ignition.
Electrical shock, flames and explosion can cause serious injury.
• Improper use can cause hazardous conditions
Read and follow all safety precautions accompanying the product.
Unexpected electrical, thermal or mechanical occurrences can cause injury.

Fuel System Tools

⚠WARNING

• Flammable liquid and fumes can ignite
Wear safety shield (user and bystanders).
Use only in well-ventilated areas.
Flames or explosion can cause injury.

Geared Head Torque Multipliers

⚠WARNING

• Use of gear head torque multipliers for torque control may result in inaccurate torque application
For accurate control of torque use an Electrotork®, a Torqometer® or other measuring device located directly on the fastener.
Limited accuracy of the torque ratio of a geared head torque multiplier may cause improper preload of the fastener if it is used for torque control.

Grinders, Grinding Wheels, Power Tool Accessories

(drill bits, wire brushes, grinding burrs, abrasive wheels, grinding wheels, valve grinders, valve grinding wheels)

⚠WARNING

• Grinding causes flying particles
• Power tool accessories can break
Wear safety goggles (user and bystanders).
Do not operate without eyeshields, guards and holders in place.
Do not use power tool accessories at speeds faster than their maximum rated RPM.
Do not use any accessory not specifically intended for use with a die grinder, with a die grinder.
Flying particles and broken tools can cause injury.
• Wire bristles can break and fly off
Wear safety goggles (user and bystanders).
Flying particles can cause injury.
• Force on the side of grinding wheels or discs can break them
Do not grind on the side of a grinding wheel or disc.
Broken grinding wheel or disc can cause injury.

Hammers
(See Striking and Struck Tools)

Hand Tools Handles

⚠WARNING

• Handles can break if overloaded
Do not use "cheater bars" on handles.
Pull, do not push, on handles.
Broken handle or a fall can cause injury.

Sockets, Accessories

⚠WARNING

• Sockets and accessories can break if used with an impact wrench
Do not use chrome or industrial finish hand tools with impact drivers.
Broken sockets or accessories can cause injury.

Impact Wrenches

⚠WARNING

• Impact wrenches produce noise and vibration
Wear appropriate ear protection and gloves.
Extended exposure to noise and vibration can cause injury or impairment
• Impact wrenches can cause breakage of sockets or accessories
Wear safety goggles (user and bystanders).
Flying particles can cause injury.

Knives

⚠WARNING

- Blades are sharp and can cut
- Blades can break causing flying objects

Wear safety goggles (user and bystanders).
Do not pry or bend blade.
Keep away from children.
Sharp edges and flying objects can cause injury.

Leak Detectors

⚠WARNING

- Gases, fluids or accumulated fumes may explode or ignite

Do not expose fluids or fumes to flames, sparks or other sources of ignition.
Wear safety goggles or safety shield.
Use only in well-ventilated areas.
Explosion or flames can cause injury.
Fumes can cause breathing difficulty.

Lift Equipment Jacks, Jack Stands

⚠WARNING

- Vehicles supported by jacks or jack stands may fall if used improperly

Do not exceed rated capacity of jack or jack stand.
Do not work on vehicle supported by jack, use jack stands; use jack stands in pairs.
Use jack and jack stands only on hard level surface.
Lift and support vehicle only on its designated lift points.
Failure of jack or jack stand or falling of vehicle can cause serious injury or death.

Lifts, Hoists

⚠WARNING

- Vehicles supported on lifts or hoists may fall if lifts are improperly installed, used or maintained

Do not exceed rated capacity of the lift.
Lift must support vehicle only on its designated lift points.
Lifts must be installed by qualified installer.
Lifts must be inspected and maintained in accordance with user's manual.
Follow all instructions for proper use and all safety messages in user's manual.
Failure of the lift or vehicle falling off of lift due to use of improper lift points can cause serious injury or death.

Lighting

⚠WARNING

- Electrical shock can result from absence of grounding prong

Do not remove or bypass the grounding prong in any electrical plug.
Disconnect power before servicing.
Electrical shock can cause injury.

Pliers/Cutters

⚠WARNING

- Broken tips or cut material can fly

Wear safety goggles (user and bystanders).
Flying material can cause injury.

Power Tools

(impact wrenches, ratchets, hammers, sanders, grinders, cut-off tools)

⚠WARNING

- Power tools can cause flying particles

Wear safety goggles (user and bystanders).
Flying particles can cause injury.

- Power tools generate noise

Wear hearing protection (user and bystanders).
Prolonged exposure to noise can cause hearing loss.

- Power tools vibrate

Avoid prolonged exposure to vibration.
Prolonged exposure to vibration can cause injury.

- Improper use of power tools and accessories can cause broken tools

Do not use without all guards in place.
Use accessories rated at tool RPM or higher.
Read and follow instructions before using power tools.
Broken tools can cause injury.

Pressure Equipment and Pressure Gauges

(all equipment using pressurized air or hydraulic fluid such as tanks, spray guns and blow guns)

⚠WARNING

- Pressurized equipment, systems or tanks can break or leak

Do not exceed the maximum pressure rating of equipment. Wear safety goggles or shield and protective clothing appropriate to the fluid.
Pressurized fluid striking the body can cause personal injury. Flammable fluids such as gasoline, propane, etc. can ignite or explode and cause injury.

- Fluids can leak or escape

Use only in well-ventilated areas.
Breathing vapors or fluids from leaks can cause illness or injury.

- Pressurized air or fluid stream can propel dust or particles

Do not direct air or fluid stream at your body or at others.
Flying particles, air or fluid entering body can cause injury.

- **Improper use or maintenance of pressurized equipment can cause leaks or rupture**

Read and follow instructions.
Leaking of pressurized equipment can cause injury.

Prybars

⚠WARNING

- Prying can cause flying chips. Chipped or cracked prybars can cause flying chips
- Prybars can chip if struck

Wear safety goggles (user and bystanders).
Do not use pipe or lever extension.
Do not use a prybar if chipped or cracked.
Do not use a prybar as a punch or hammer.
Flying chips can cause injury.

Pullers, Presses

⚠WARNING

- Puller or press parts under stress can break

Wear safety goggles (user and bystanders).
Use the proper type and size puller or press.
Inspect the puller, do not use puller with worn or broken parts.
Screen the puller or press operation.
Broken parts can cause injury.

Punches/Chisels (See Striking and Struck Tools)

Ratchets

⚠WARNING

- Ratchet mechanism may slip or break if dirty or worn
- Mismatched or partially worn parts can cause ratchet to slip or break

Frequently inspect, clean and lubricate all non-sealed ratchet mechanisms with light oil.
Do not immerse sealed ratchet in fluids.
Do not replace worn parts individually, use entire contents of the service kit.
Ratchets that slip or break can cause injury.

Sanders

⚠WARNING

- Sanding disc or accessories can break if used above maximum rated RPM.

Do not use sanding discs or accessories above their maximum rated RPM.
Broken sanding disc or accessories can cause injury.

- Sanding produces particles and dust

Wear safety goggle or a safety shield.
Wear a dust mask or respirator.
Some dust created by sanding may contain chemicals known to produce cancer or other health conerns.

- Misuse of grinding wheels on sanders may result in wheel breakage.

Do not use grinding wheels on sanders.
Broken grinding wheels can cause serious injury.

Scrapers

⚠WARNING

- Scrapers and putty knives can break if used for prying or chiseling

Wear safety goggles (user and bystanders).
Do not use a scraper or putty knife as a prybar or chisel.
Broken tools can cause injury.

Screwdrivers

⚠WARNING

- Screwdrivers can break if used as prybar, chisel or punch

Wear safety goggles (user and bystanders).
Do not use a screwdriver as a prybar, chisel or punch.
Broken screwdriver can cause injury.

- Plastic screwdriver handles do not provide electrical insulation

Do not use on or near live electrical circuits.
Electrical shock can cause injury.

Socket Usage

Select the proper type of socket for the application.

- **Hand Sockets** – All chrome-plated sockets and black finished sockets identified as hand sockets are for hand use only
- **Power Sockets** – Sockets designed and intended for use with power nut runners; do not use with impact drivers
- **Impact Sockets** – Sockets designed for durability when used with impact drivers; use only impact sockets with impact drivers
- Flexible sockets can cause injury when used with impact or power drivers.

Do not hold flexible sockets or swivel joint tools during use.
Rotating socket can cause hand injury.

Sockets, Power

⚠WARNING

- Power sockets or accessories can break if used on impact drivers

Wear safety goggles (user and bystanders).
Do not use power sockets or accessories with impact drivers.
Broken tools can cause injury.
Wear safety goggles (user and bystanders).
Do not hold power sockets during use.
Rotating power tools can cause injury.

Striking and Struck Tools, Punches/Chisels

⚠WARNING

- Striking and struck tools can break or chip
- Chipped or mushroomed punch and chisel ends or metal weakened by improper grinding can fragment
- Oversized hammer can chip the punch or chisel

Wear safety goggles (user and bystanders).
Do not use punch or chisel having mushroomed ends; dress edges or mushroomed ends to original shape with a hand file.
Do not misuse a chisel as a punch.
Hammer head diameter should be approximately 3/8" larger than head of punch or chisel.
Flying objects can cause injury.

- Steel punches and chisels can cause sparks during use

Do not use near flammable substance.
Flammable substances can ignite causing injury.

Hammers

⚠WARNING

- Hammers can cause flying chips. Chipped, mushroomed or cracked hammers can cause flying chips
- Glancing blows can cause flying chips

- Striking hard surface can cause flying chips
- Body hammers can chip or break if struck against hard surfaces

Wear safety goggles (user and bystanders).
Do not use chipped, mushroomed or cracked hammers.
Strike squarely and avoid glancing blows.
Do not strike other hammers or similar hard surfaces.
Use body hammers only for striking automotive-type sheet metal; do not strike hard surfaces.
Flying chips can cause injury.

- Steel hammers can cause sparks during use

Do not use near flammable substance.
Flammable substances can ignite causing injury.

- COMPOTHANE® or urethane hammers can rupture or ignite if exposed to liquid oxygen

Do not use *COMPOTHANE* or urethane hammers near liquid oxygen.
Ruptured and/or ignited COMPOTHANE *or urethane can cause injury.*

Tire Changers

⚠WARNING

- Tires can explode

Wear safety goggles.
Do not over-pressurize tire.

Read and follow all safety precautions in user's manual
Exploding tire can cause serious injury.

Tool Storage Units

⚠WARNING

- Storage units can tip or strike you

Do not open more than one loaded drawer at a time.
Keep children away.

Close lid and lock drawers and doors before moving.
Apply brakes on locking casters when not moving unit.

Do not step in or on drawers.
Secure units together with fasteners.
Read and follow instruction manual
Tipping of storage unit or unit striking you can cause injury.

- Units edges can cut or pinch

Do not pull; push to move.
Wear gloves when lifting by edges.

Keep feet and fingers clear of edges when stacking, hanging or moving units.
Unit edges can cause injury.

Torque Sticks

⚠WARNING

- The actual torque delivered to a fastener by a torque stick or torque extension depends on proper usage.

Read and follow all instructions.

Check final torque with a torque wrench
Improper torque can cause fastener loosening or breakage resulting in injury.

Torque Testers

⚠WARNING

- Calibration weights can cause tester and its base to tip

Wear safety goggles (user and bystanders).

Counterbalance or anchor mounting base.
Tipping base can cause injury.

Torque Wrenches

⚠WARNING

- Overtorquing can cause breakage
- Wrench can break while breaking fasteners loose
- Force against flex stops on flex head torque wrenches can cause head breakage
- An out-of-calibration torque wrench can cause part or tool breakage

Wear safety goggles (user and bystanders).
Do not exceed rated torque.
Do not use a torque wrench to break fasteners loose.
Do not force head of flex head torque-wrenches against stops.
Periodic recalibration is necessary to maintain accuracy.
Broken tools can cause injury.

Welders, Cutters Electric, Plasma

⚠DANGER

- Electric welding or plasma cutting causes ultraviolet rays, localized magnetic fields, sparks, weld spatter and hazardous vapors and may cause electrical shock
- Bystanders will be exposed

Wear welding helmet with appropriate shade lens while welding or cutting.
Wear gloves and protective clothing.
Use only in well-ventilated area.
Do not allow bystanders in area while welding or cutting.
Do not operate this equipment if you have an implanted electromechanical device.
Never coil electrode/torch lead around your body.
Read and follow all safety precautions in instructions.
Ultraviolet rays will burn eyes, magnetic field may affect operation of medical devices. Weld spatter, electrical shock or sparks can cause burns or other injuries.

Gas, Welding and Plasma Cutting

⚠WARNING

- Welding and cutting produce heat, weld spatter and hazardous vapors

Wear gloves, face shield and protective clothing.
Use only in well-ventilated area.
Do not allow bystanders in immediate area.
Read and follow all safety precautions in instructions.
Byproducts of welding or cutting can cause burns or other bodily injuries.

Wheel Alignment Tools

⚠WARNING

- Suspension springs can slip out of engagement with spring compressors

Follow instruction and assure that spring is properly engaged with the compressor.
Wear safety goggles (user and bystanders).

- WA92 can break or disengage from spring if torqued over 30 lb ft

Do not torque WA92 over 30 lb-ft
Broken compressor or disengaged spring can cause injury.

Wrenches

⚠WARNING

- Excess force can cause crowfoot or flare nut wrench slippage

Do not over-torque; no pipes or "cheater bars."

Use only moderate force on crowfoot and flare nut wrenches.
Broken or slipping wrenches can cause injury.

- Slimline wrenches can break if overloaded

Wear safety goggles (user and bystanders).
Broken wrench jaw can cause injury.
- User can slip or fall if wrench breaks or fastener breaks loose

Pull, do not push, on wrench handle.
Injury can occur if user loses balance.

Official Website
www.snapon.com

US Customer Service
1-877-762-7664
www.snapon.com
Click on Customer Service in upper right corner of website

Canada Customer Service
1-866-824-0524
www.snapon.com
Click on Customer Service in upper right corner of website

Snap-on Corporate
www.snapon.com/corporate

Request a Franchisee or Snap-on Representative
www.snapon.com
Click on Find a Franchisee in the upper right corner of website

Own a Snap-on Franchise
www.snaponfranchise.com

Snap-on Credit
1-877-777-8455
www.snaponcredit.com

Snap-on Racing
www.snapon.com/racing

Snap-on Business Solutions
www.sbs.snapon.com

Find us on…

www.youtube.com/snaponscanner

www.facebook.com/SnaponTools

www.twitter.com/snapon_inc

Hand Tools
www.snapon.com/handtools

Power Tools
www.snapon.com/powertools

Tool Storage
www.snapon.com/toolstorage

Diagnostics
www.diagnostics.snapon.com

Diagnostics Product Support
1-877-447-6276
diagnostics_Support@snapon.com

Diagnostic Training – Online
www.diagnostics.snapon.com/trainingsolutions

Shop and Technician Tools
www.snapon.com/shoptools

Technical Support

Specialty Meters (circuit testers and multimeters)	1-888-382-6522
Trailer Harness Testers and Adaptors (YA7900A, YA7900AP, LT series)	1-888-786-7899
Handheld Gas Analyzers (all HHGA)	1-888-717-1333
Carbon Monoxide Analyzer (MT706A)	1-888-382-6522
Diagnostic Smoke™ Vapor Producing Machines	1-800-901-1988
Battery Chargers (EEBC100, 400, 500 and accessories)	1-866-713-6007
Electronic Battery Tester (EECS150, 350, 550, 750, DTac and microvat)	1-866-592-8052
ECO™ PLUS A/C Service Center, KoolKare Plus (EEAC325A, EEAC325B, EEAC324A, EEAC324B)	1-866-769-2788
Wheel Balancers and Tire Changers	1-800-225-5786
Pin Plates and Collet Sets (EEWB3-1A and EEWB3-4)	1-800-242-6687
TPMS3 Technical Support	1-888-621-8767
MIG/TIG Welders and Plasma Cutters	1-800-ABC-WELD
Heavy Duty Transmission Fluid Exchangers (EETF303B, EETF304B, EETF306A)	1-800-303-5874
BrakeKare™ Brake Flush System (EEBR311A)	1-800-393-1272 ext. 230
TransKare™ 1 ATF Exchanger (EETF305A)	1-877-906-1395, press 3 for technical support
FuelKare™ Fuel Service System (EEFS305A)	1-877-906-1395, press 3 for technical support
Fuel System Decarbonizer (EEFS505A)	1-877-776-8486
Blast Cabinet (All YA cabinets)	1-800-253-3661
Solvent Based Parts Washers (all PBC and PBD washers)	1-800-253-3661
Gauge Sets (Compression, Fuel Injection and Pressure	1-855-779-8880

Snap-on General Contacts – International

Snap-on Australia Customer Service
1-800-810 581
www.snapontools.com.au

Snap-on Japan
www.snapon.co.jp

Snap-on Germany
www.snapon.de

Snap-on International
www.snapon.com/international

Snap-on Italy
www.snapon.it

Snap-on Mexico
www.snapon.com.mx

Snap-on Netherlands/Belgium
www.snap-on.eu

Snap-on UK
www.snapon.co.uk

Snap-on UK Customer Service – Internet Orders
01536 413877
E-mail: uksales@snapon.com

Government and Industrial

Snap-on Industrial
www.snapon.com/industrial

Snap-on Industrial Customer Service, US
1-877-740-1900
E-mail: order.crystallake.rcsc@snapon.com

Snap-on US Government Customer Service
1-888-418-5600
Fax: 1-888-418-5900
E-mail: contract.sales@snapon.com

Canada Industrial and Government Customer Service
1-888-451-8665
Fax: 1-888-447-8665
E-mail: canadacustomercare@snapon.com
Francais: canadaservicealaclientele@snapon.com

Snap-on Industrial Europe
www.snaponindustrial.eu

Snap-on Industrial UK
www.snapon.com/uk/industrial
Industrial and Government Customer Service
01536 413904
E-mail: industrialuk@snapon.com

Industrial Customer Service Australia
1800 811 480
E-mail: sota.ind.customerservice@snapon.com

Snap-on Equipment
www.snaponequipment.com
Equipment Service – North America
1-800-225-5786

SNAP-ON TOOLS INTERNATIONAL LLC

2801 80th Street
Kenosha, WI 53143
Telephone: For general inquiries 262-656-5200 (For export inquiries from within the USA) 1-262-656-5288 or 1-262-656-5119
Fax: 1-262-656-1403 / 1-262-656-0837 **e-mail:** intl.sales@snapon.com

European Division Office – North
Ylinenkatu 39
23500 Uusikaupunki, Finland
Telephone: 358-400-536351
Fax: 358-401-536351
e-mail: european.division.north@snapon.com

European Division Office – South
2801 80th Street
Kenosha, WI 53143
Telephone: 1-262-656-5288
Fax: 1-262-656-1403
e-mail: european.division.south@snapon.com

Asia/Pacific Division
25 Tagore Lane #01-02
Singapore 787602
Telephone: +(65) 6459-2712
Fax: +(65) 6459-1520
e-mail: asia.pacific.division@snapon.com
Internet: http://snapon.com.sg

Latin America Caribbean Division
9500 South Dadeland Blvd.
Suite 706
Miami Fl 33156
Telephone: +1 305 670 1906
Fax: 1-305-670-1908
e-mail: latinamerica.caribbean@snapon.com

South East Europe – Middle East/Africa (SEEMEA) Division
P.O. Box 65 033
Athens 15410, Greece
Telephone: +30 210 6724828
Fax: +30 210 6725754
e-mail1: seemead@snapon.com
e-mail2: south.east.europe.mea.division@snapon.com

United Kingdom:
Snap-on Tools – Head Office and Distribution Centre
23 Telford Way
Kettering
Northants NN16 8SN, England
Telephone: 01536 413800
Fax: 01536 413900

Industrial – Government and Education, Sales Division – Snap-on Tools
Industrial Business Centre
38A Telford Way, Kettering
Northants NN16 8UN, England
Telephone: +44 (0)1536 413904
Fax: 01536 413874
e-mail: industrialuk@snapon.com

U.K. Repair Centre
Tools Ltd.
Telford Way,
Kettering
Northants NN16 8UN, England
Telephone: 01536 413800
Fax: 01536 410740

Snap-onTools (Australia) Pty LTD.
National Distribution Centre
80 Holbeche Road
P.O. Box 6077
Blacktown, NSW 2148 Australia
Telephone: (61) 2-9837-9100
Fax: (61) 2-9837-9199
e-mail: sota.webmasters@snapon.com

Snap-on do Brasil Comércio e Industria Ltda.
Rua Juscelino Kubitscheck de Oliveira, 470
Santa Bárbara d'Oeste, SP
13456-401 Brazil
Telephone: +55 (19) 2108 1000
Fax: +55 (19) 2108 1040
e-mail: IndustrialBrazil@snapon.com
www.snapon.com.br

Snap-on Tools B.V. – Netherlands
Schepenbergweg 34
1105 AT Amsterdam
The Netherlands
Telephone: +31 (0) 20 5682666
Fax: +31 (0) 20-5682670
e-mail: benelux.info@snapon.com
Internet: www.snapon.com/nl

Snap-on Industrial Belgium & Luxembourg Division
SNA Germany GmbH
Willettstrasse 10
40822 Mettmann
Germany
Telephone: +32-(0)14-231967
Fax: +32-(0)14-232627
e-mail: industrial.be@snapon.com
Internet: www.snapon.com/eu/industrial

Snap-on Dealer Group Germany Division
Geschaftsbereich Snap-on Tools
SNA Germany GmbH
Gewerbering 1
09337 Hohenstein-Ernsttahl / OT Wustenbrand
Germany
Telephone: +49-(0)3723-66820-12/13
Fax: +49-(0)3723-66820-14
e-mail: decustomerservices@snapon.com
Internet: www.snapon.de

Snap-on Industrial Belgium & Luxembourg Division
SNA Germany GmbH
Auf dem Hüls 5
40822 Mettmann
Germany
Telephone: +32-(0)14-231967
Fax: +32-(0)14-232627
e-mail: industrial.be@snapon.com
Internet: www.snapon.com/eu/industrial

Snap-on Industrial International Division
SNA Germany GmbH
Willettstraße 10
40822 Mettmann
Germany
Telephone: +33-(0) 3 88 65 61 50
Fax: +33-(0) 3 88 65 61 51
e-mail: snapon-intl.europe@snapon.com
Internet: www.snapon.com/eu/industrial

Snap-on Industrial Germany Division
SNA Germany GmbH
Willettstraße 10
40822 Mettmann
Germany
Telephone: +49-(0)2104-950-911
Fax: +49-(0)2104-950-999
e-mail: Indus.germany@snapon.com
Internet: www.snapon.com/eu/industrial

Snap-on Industrial USA Government Business Unit
SNA Germany GmbH
Willettstraße 10
40822 Mettmann
Germany
Telephone: +49-(0)2104-950-928
Fax: +49-(0)2104-950-955
e-mail: Indus.germany@snapon.com

Snap-on Industrial Netherlands Division
SNA Germany GmbH
Willettstraße 10
40822 Mettmann
Germany
Telephone: +31-(0)880 104000
Fax: +31-(0)880 104010
e-mail: industrial.nl@snapon.com
Internet: www.snapon.com/eu/industrial

Snap-on Tools Italia S.r.l.
via Bizet, 43/45
20092 Cinisello Balsamo (MI), Italy
Telephone: +39 02 66 04 53 70
Fax: +39 02 61 29 78 15
e-mail: indus.italia@snapon.com
Internet: www.snapon.com/eu/industrial

Snap-on Tools Japan, K.K.
Snap-on, Bahco
2-1-6 Shinkiba, Koto-ku,
Tokyo, 136-0082 JAPAN
Telephone: +81-3-5534-1280
Fax: 81-3-5534-1284
e-mail: SOJ-INFO@snapon.co.jp
Industrial: +81-3-5534-1281
OEM/National Accounts: +81-3-5534-1300
Bahco/Distribution: +81-3-5534-1301

SNAP-ON TOOLS INTERNATIONAL LLC

2801 80th Street
Kenosha, WI 53143
Telephone: For general inquiries 262-656-5200 (For export inquiries from within the USA) 1-262-656-5288 or 1-262-656-5119
Fax: 1-262-656-1403 / 1-262-656-0837 **e-mail:** intl.sales@snapon.com

Snap-on Tools Singapore Pte. Ltd.
25 Tagore Lane #01-01
Singapore 787602
Telephone: +(65) 6451-5570
Fax: +(65) 6451-5574
e-mail: esales.sg@snapon.com
Internet: http://snapon.com.sg

Snap-on Tools Singapore PTE. Ltd
Malaysia Branch
B-6-10, Street Mall, One South
Jalan OS, Taman Serdang Perdana
43300 Seri Kembangan
Telephone: (60-3) 8957 1938
Fax: (60-3) 8957 2839

Snap-on Tools Singapore PTE. Ltd
Philippines Branch
Unit 801 Prime Land, Market St.
Madrigal Business Park, Ayala Alabang
Muntinlupa City, 1781 Philippines
Telephone: (63-2) 843 7935
Fax: (63-2) 843 7730

Snap-on Tools Singapore PTE. Ltd
Indonesia Branch
Graha Pratama Building
14th Floor
Jl.M.T Haryono Kav. 15
Jakarta 12810, Indonesia
Telephone: (62-21) 8370-9611
Fax: (62-21) 8370-9612

Snap-on Tools Singapore PTE. Ltd
Thailand Branch
Talomsin Bulding
924 Rama 3 Road
Bangpongpang Yannawa
Bangkok 10120, Thailand
Telephone: (66) 2294-9660
Fax: (66) 2294-9665

Snap-on Trading (Shanghai) Co., Ltd.
Unit 2001-2005, Ascendas Cross Tower
318 Fuzhou Road, Shanghai 200001
P. R. China
Telephone: +(8621) 6391-2388
Fax: +(8621) 6391-2382
e-mail: esales.cn@snapon.com
Internet: www.snapon.com.cn

Snap-on Trading (Shanghai) Co., Ltd.
Beijing Branch
Room 517 Tower B, Grand Pacific Building
8A Guanghua Road
Beijing 100026
P.R. China
Telephone: +(8610) 6581-8838
Fax: +(8610) 6581-6681
e-mail: esales.cn@snapon.com
Internet: www.snapon.com.cn

Snap-on Tools Hong Kong Ltd.
Unit 2010, 20/F., Laford Centre,
838 Lai Chi Kok Road,
Cheung Sha Wan, Kowloon
Hong Kong
Telephone: +(852) 2370-3700
Fax: +(852) 2370-3400
e-mail: esales.hk@snapon.com
Internet: www.snapon.com.hk

Snap-on Tools Singapore Pte. Ltd.
Taiwan Branch
Address: 3F-4, No.9, Wuquan 1st Road,
New Taipei Industrial Park,
Xinzhuang District 24892
New Taipei City, Taiwan (R.O.C.)
Telephone: +(886) (2)-2298 9789
Fax: +(886) (2)-2298 2288
e-mail: eric.chen@snapon.com
e-mail: esales.tw@snapon.com

Snap-on Tools Korea Ltd.
#505, Bldg 301, Bucheon Techno Park Block 3
365 Samjung-dong, OhJung-Gu
Bucheon City, GyeongGi-Do 421-809
Korea
Telephone: +(8232) 326-7310
Fax: +(8232) 326-7312
e-mail: esales.kr@snapon.com

Snap-on Tools Private Limited
Head Office and North Region Office
6/2 Begumpur Khatola, 39 Milestone
NH-8
Gurgaon - 122 001, Haryana
India
Telephone: +(91-124) 4599700
Fax: +(91-124) 4056866
e-mail: esales.in@snapon.com

Snap-on Tools Private Limited
Western Region Office (Mumbai)
Dilkap Chambers 404/406, 4th Floor
Fun Republic Lane, Nr. Bansali Engineering
Veera Desai Road, Andheri West
Mumbai, India
Telephone: +(91-22) 67020909/67020400
Fax: +(91-22) 2673-0571
e-mail: esales.in@snapon.com

Snap-on Tools Private Limited
Southern Region Office (Bangalore)
B-327, 1st B" Block AECS Layout
Opp. To Brooks Field, Kundalahalli
Bangalore - 560037
India
Telephone: + (91-80) 6537-5197/98
Fax: +(91-80) 2854-0618
e-mail: esales.in@snapon.com

Snap-on/Sun de Mexico S.A. de C.V.
Avenida Gustavo Baz 166-B
Colonia la Escuela
Tlalnepantla, Estado de Mexico
CP 54090 Mexico
Telephone: +(52) 55 50 10-3000
Fax: +(52) 55 5010-3025 or 5010-3026
e-mail: info@snapon.com.mx

Snap-on Tools Puerto Rico
9500 South Dadeland Blvd.
Tower South Office #601
Miami, FL 33156
Telephone: 1-305-670-1906
Fax: 1-305-670-1908
e-mail: latin.america.caribbean.division@snapon.com

Snap-on South Africa (Pty) Ltd.
6 Hippo Park
12 Kubu Avenue
Riverhorse Valley
Durban 4051
South Africa
Telephone: +27 861 762 766
Fax: +27 861 762 767
e-mail: enquiries@snapon.co.za
Internet: www.snapon.co.za

Snap-on Canada – Industrial Sales Division
Snap-on Tools of Canada Ltd.
195A Harry Walker Parkway North
Newmarket, ON
L3Y 7B3 Canada
Toll Free: 1-888-451-8665
Toll Free Fax: 1-888-447-8665
email: Canadaindustrial@snapon.com
Internet: www.snapon.com/canada

Calgary Velocity & National Repair Centre
7403-48th Street S.E.
Calgary, Alberta T2C 4H6
Telephone: 1-403-720-0525
Toll Free: 1-800-263-8665
Fax: 1-403-720-0550
Toll Free Fax: 1-888-638-1111

Snap-on Canada – Industrial Sales Division
Snap-on Tools of Canada Ltd.
16775 Yonge Street Suite 300
Newmarket, ON
L3Y 8J4 Canada
Toll Free: 1-888-451-8665
Toll Free Fax: 1-888-447-8665
email: CanadaIndustrial@snapon.com
Internet: www.snapon.com/canada

Warranty for Products

Snap-on Logistics Company, or its assigns, ("Snap-on") warrants to customers who purchase products from authorized Snap-on distribution channels that Snap-on® brand products and Blue-Point® brand products will be free from defects in workmanship and materials for a duration described in each product's warranty code. The warranty duration depends upon the nature of the product. Prior to a product purchase, or if the product information for purchased product does not include a warranty code with the applicable duration, customer can obtain the product warranty code and warranty duration from a Snap-on franchisee or representative. If customer is not serviced by a Snap-on franchisee or representative, then the product warranty code and warranty duration may be obtained by contacting the Snap-on Customer Care Center via telephone at 1-877-762-7664 or e-mail ncccsupport@snapon.com. Outside North America, contact the closest sales office shown on pages 645–646. Consumable products are warranted, at the time of sale, only against defects in workmanship or materials that prevent their use. Consumable products are goods reasonably expected to be used up or damaged during use, including but not limited to drill bits, saw blades, grinding discs, sanding discs, knife blades, files, O2 sensors and batteries. To the extent permitted by law, this warranty only extends to the original customer and cannot be transferred or assigned.

During the applicable duration of the warranty, at its option, Snap-on will repair or replace its products which fail to give satisfactory service due to defective workmanship or materials, or provide a refund by repaying or crediting customer with an amount equal to the purchase price of such products. Repair, replacement or refund shall be at the election and expense of Snap-on, and is customer's exclusive remedy in place of all other rights and remedies. Any products or parts replaced or for which Snap-on has provided a refund are the property of Snap-on and will not be returned.

To obtain warranty service, return products to a Snap-on franchisee or representative.

For customers not serviced by a Snap-on franchisee or representative, contact the Snap-on Customer Care Center via telephone at 1-877-762-7664 or e-mail ncccsupport@snapon.com. Outside North America, contact the closest sales office shown on pages 645–646. The following information will be required with customer's warranty request: (1) date and proof of purchase, (2) where customer purchased the product, (3) full name, (4) shipping address, (5) phone number, (6) e-mail address, and (7) item number(s) or approximate weight of return package. Warranty requests that do not include all the required information will not be processed. Once the warranty request is validated, the customer will be provided a RGA number and will be sent a shipping label either electronically through e-mail or through the US mail, and must ship the product to Snap-on. Upon receipt of the product, the warranty claim will be reviewed and the product will be inspected. If the warranty request is found to be valid, the product will be repaired and returned to the customer or a replacement product or refund will be shipped to the customer. If the warranty claim is found to be invalid, the original product will be returned to the customer. By repairing or replacing a product, or providing a refund, Snap-on does not waive a claim that a product nevertheless has been subject to abnormal use.

If customer chooses not to (1) use a carrier that offers tracking or (2) insure or declare the full value of the product, customer will be responsible for any loss or damage to the product during shipping. Replacement or refund will not be issued unless a valid proof of delivery can be provided.

In addition to any limitations outlined in warranty codes provided with the product, *Snap-on* does NOT provide any warranty for (1) products labeled other than *Snap-on* or *Blue-Point* or (2) products subjected to "abnormal use". Products that are not labeled *Snap-on* or *Blue-Point* are subject to the warranty provided by the manufacturers of those products and *Snap-on* will pass along any such warranties, to the extent that it is permitted to do so, but it is not responsible for warranty services or processing warranty claims. "Abnormal use" includes misuse, accident, modification, unreasonable use, abuse, neglect, lack of maintenance, use in product related service, or use after the product is significantly worn. Abnormal use of tool storage units also includes, without limitation, situations when a unit is pulled using a mechanical vehicle, rolled over large drops, used in a highly corrosive environment, used as a step stool, modified with non-*Snap-on* parts, overloaded or modified in any way.

THE FOREGOING WARRANTY IS IN LIEU OF AND EXCLUDES ALL OTHER WARRANTIES NOT EXPRESSLY SET FORTH HEREIN, WHETHER EXPRESS, IMPLIED OR COLLATERAL, BY OPERATION OF LAW OR OTHERWISE, INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTIES OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. Descriptions of product contained in this catalog are for the sole purpose of identifying product and shall not be construed as an express warranty.

LIMITATION OF LIABILITY. SNAP-ON AND ITS AFFILIATED COMPANIES AND THIRD PARTY SUPPLIERS SHALL NOT BE LIABLE FOR ANY INCIDENTAL, SPECIAL OR CONSEQUENTIAL LOSSES, COSTS OR DAMAGES INCURRED BY CUSTOMER OR OTHERS, INCLUDING PERSONAL INJURY OR DEATH, DIRECTLY OR INDIRECTLY ARISING FROM THE SALE, HANDLING OR USE OF THE PRODUCTS, OR FROM ANY OTHER CAUSE WITH RESPECT TO THE PRODUCTS OR THE FOREGOING WARRANTY, WHETHER SUCH CLAIM IS BASED UPON BREACH OF CONTRACT, BREACH OF WARRANTY, STRICT LIABILITY IN TORT, NEGLIGENCE OR ANY OTHER LEGAL THEORY (INCLUDING WITHOUT LIMITATION, LOST PROFITS, REVENUES, ANTICIPATED SALES, BUSINESS OPPORTUNITIES, GOODWILL, OR INTERRUPTION OF BUSINESS OR OTHER INJURY OR DAMAGE).

To the extent allowed by applicable law, this warranty and all rights and obligations hereunder shall be governed by and construed in accordance with the laws of the State of Wisconsin, without reference to principles of conflicts of laws. The rights and obligations of the parties hereunder shall not be governed by the 1980 U.N. Convention on Contracts for the International Sale of Goods.

All parts of this warranty apply to the extent permitted by law and unless restricted or prohibited by law. You may have greater rights pursuant to the legislation of your jurisdiction. Any provision which is prohibited or unenforceable in any jurisdiction shall, as to such jurisdiction, be ineffective to the extent of such prohibition or unenforceability but shall not affect the enforceability of such provision in any other jurisdiction.

Snap-on Incorporated
2801 80th Street
Kenosha, Wisconsin 53143

Your Safety Is Important To Us

Personal safety and the proper use of tools and equipment are reflected in safety statements found throughout this catalog. More safety precautions for these products are detailed on pages W1 to W4.

Using the right tool and using it properly for the job it is designed for are both very important. It will help to safeguard the user as well as the tools and equipment.

Important Notice

We reserve the right to make changes in design or construction at any time without incurring any obligation in incorporating such changes in tools or equipment previously sold. We also reserve the right to discontinue the manufacture or offering for sale through Snap-on franchisee or representatives of any tools or equipment at such time as we consider necessary. We cannot accept the responsibility for the results of using tools which have been abused or badly worn, such as punches and chisels mushroomed by hammer blows, or the incorrect use of tools, or tools repaired by others. This catalog is distributed by Snap-on Incorporated globally and not all items may be available in each country. For detailed information about the availability and pricing, please contact your local Snap-on representative.

Tool Dimension Accuracy

Dimensions shown in this catalog have been rounded to the nearest fractional size or nearest tenth millimeter and are not exact product specifications. Ask your Snap-on representative for product specifications if required.

ISO 9001 Certified

The Snap-on Quality Management System, including merchandised product procurement, is certified to ISO 9001

ISO 14001/OHSAS 18001 Certified

Snap-on facilities are guided by the Snap-on Environmental, Health and Safety Management System, which is certified to ISO 14001 and OHSAS 18001.

These certifications demonstrate that the Snap-on Quality, Environmental, Health and Safety Management Systems conform to internationally recognized quality standards as verified by independent audits.

Trademarks

The following are trademarks, some registered in the United States and other countries, of Snap-on Incorporated:
Snap-on®, Blue-Point®, BrakeKare™, Crud Thug®, Docker Locker®, D-TAC™, Dual 80®, ECO™ PLUS, Electrotork®, ETHOS®, Fast-Track®, Flank Drive®, Flank Drive® Plus, FuelKare™, InPulse™, Instinct®, ISO-Ride® and design, KOOL KARE™ PLUS, Lock'n Roll®, Loxocket®, MicroVAT™, Mitchell1®, MODIS™, PowerBank™, PowerCab™, PowerEdge™, PowerFlex™, PowerHouse™, PowerTop™, Scanner™, ShopKey®, ShopKey Live™, Slots-N-Dots™, Smartsmoke®, Snap-on Racing® and logo, SOLUS PRO™, SOLUS™, SOLUS Ultra®, Talon Grip™, TechAngle®, TechLog™, Techmemory™, Techwrench®, TORQLOG®, TORQOMETER®, Torque Tester™, Training Solutions®, TransDrive™ logo, Trans-Drive™, TransKare™, Vantage PRO™, Versameter®, Versatest™, Versatorq®, Versatorq1, VERUS®, THEBIS™.

Listed below are some other trademarks which appear throughout this catalog. They are the sole property of the owners.
4Runner®, Accord®, ACR®, Aerostar®, ARO®, Astro®, Avalanche®, Beetle®, Bonneville®, Boxster®, Bravada®, Cadillac®, Camaro®, Camry®, Caprice®, Caravan®, Cayenne®, Cherokee®, Civic®, Corolla®, Corvette®, Crossfire®, Crown Victoria®, DeVille®, Durango®, Element®, Envoy®, EOS®, Escalade®, Escort®, Fiesta®, Grand Am®, Grand Cherokee®, Grand Prix®, HHR®, Highlander®, Hummer®, Intrepid®, ION®, Jetta®, Latch-on®, Magnum®, Malibu®, Maxima®, Monte Carlo®, Mustang®, Odyssey®, Panamera®, Passat®, Phillips®, Prelude®, Rabbit®, Ram®, Silverado®, Solstice®, Suburban®, Tahoe®, Tempo®, Thunderbird®, Torx®, Velcro®, Vibe®, Windstar®.
All other marks are trademarks of their respective holders.

Showing Millimeter Sizes, Fractional and Decimal Inch Sizes, and Drill Number Sizes

Note: To convert from inches to millimeters, multiply by 25.4; to convert from millimeters to inches, multiply by 0.03937

M	DE	F	DN	M	DE	F	DN	M	DE	F	DN	M	DE	F	DN	M	DE	F	M	DE	F
0.10	0.0039	—	—	1.85	0.0728	—	—	—	0.1660	—	19	7.25	0.2854	—	—	13.49	0.5313	17/32	35.00	1.3780	—
0.15	0.0059	—	—	—	0.0730	—	49	4.25	0.1673	—	—	7.30	0.2874	—	—	13.50	0.5315	—	36.00	1.4173	—
0.20	0.0079	—	—	1.90	0.0748	—	—	4.30	0.1693	—	—	—	0.2900	—	L	13.89	0.5469	35/64	36.51	1.4375	1 7/16
0.25	0.0098	—	—	—	0.0760	—	48	—	0.1695	—	18	7.40	0.2913	—	—	14.00	0.5512	—	37.00	1.4567	—
0.30	0.0118	—	—	1.95	0.0768	—	—	4.37	0.1719	11/64	—	—	0.2950	—	M	14.29	0.5625	9/16	38.00	1.4961	—
—	0.0135	—	80	1.98	0.0781	5/64	—	—	0.1730	—	17	7.50	0.2953	—	—	14.50	0.5709	—	38.10	1.5000	1 1/2
0.35	0.0138	—	—	—	0.0785	—	47	4.40	0.1732	—	—	7.54	0.2969	19/64	—	14.68	0.5781	37/64	39.00	1.5354	—
—	0.0145	—	79	2.00	0.0787	—	—	—	0.1770	—	16	7.60	0.2992	—	—	15.00	0.5906	—	39.69	1.5625	1 9/16
0.40	0.0156	1/64	—	2.05	0.0807	—	—	4.50	0.1772	—	—	—	0.3020	—	N	15.08	0.5938	19/32	40.00	1.5748	—
0.40	0.0157	—	—	—	0.0810	—	46	—	0.1800	—	15	7.70	0.3031	—	—	15.48	0.6094	39/64	41.00	1.6142	—
—	0.0160	—	78	—	0.0820	—	45	4.60	0.1811	—	—	7.75	0.3051	—	—	15.50	0.6102	—	41.28	1.6250	1 5/8
0.45	0.0177	—	—	2.10	0.0827	—	—	—	0.1820	—	14	7.80	0.3071	—	—	15.88	0.6250	5/8	42.00	1.6535	—
—	0.0180	—	77	2.15	0.0846	—	—	4.70	0.1850	—	13	7.90	0.3110	—	—	16.00	0.6299	—	42.86	1.6875	1 11/16
0.50	0.0197	—	—	—	0.0860	—	44	4.75	0.1870	—	—	7.94	0.3125	5/16	—	16.27	0.6406	41/64	43.00	1.6929	—
—	0.0200	—	76	2.20	0.0866	—	—	4.76	0.1875	3/16	—	8.00	0.3150	—	—	16.50	0.6496	—	44.00	1.7323	—
—	0.0210	—	75	2.25	0.0886	—	—	4.80	0.1890	—	12	—	0.3160	—	O	16.67	0.6563	21/32	44.45	1.7500	1 3/4
0.55	0.0217	—	—	—	0.0890	—	43	—	0.1910	—	11	8.10	0.3189	—	—	17.00	0.6693	—	45.00	1.7717	—
—	0.0225	—	74	2.30	0.0906	—	—	4.90	0.1929	—	—	8.20	0.3228	—	—	17.07	0.6719	43/64	46.00	1.8110	—
0.60	0.0236	—	—	2.35	0.0925	—	—	—	0.1935	—	10	—	0.3230	—	P	17.46	0.6875	11/16	46.04	1.8125	1 13/16
—	0.0240	—	73	—	0.0935	—	42	—	0.1960	—	9	8.25	0.3248	—	—	17.50	0.6890	—	47.00	1.8504	—
—	0.0250	—	72	2.38	0.0938	3/32	—	5.00	0.1969	—	—	8.30	0.3268	—	—	17.86	0.7031	45/64	47.63	1.8750	1 7/8
0.65	0.0256	—	—	2.40	0.0945	—	—	—	0.1990	—	8	8.33	0.3281	21/64	—	18.00	0.7087	—	48.00	1.8898	—
—	0.0260	—	71	—	0.0960	—	41	5.10	0.2008	—	—	8.40	0.3307	—	—	18.26	0.7188	23/32	49.00	1.9291	—
0.70	0.0276	—	—	2.45	0.0965	—	—	—	0.2010	—	7	—	0.3320	—	Q	18.50	0.7283	—	49.21	1.9375	1 15/16
—	0.0280	—	70	—	0.0980	—	40	5.16	0.2031	13/64	—	8.50	0.3346	—	—	18.65	0.7344	47/64	50.00	1.9685	—
—	0.0292	—	69	2.50	0.0984	—	—	—	0.2040	—	6	8.60	0.3386	—	—	19.00	0.7480	—	50.80	2.0000	2
0.75	0.0295	—	—	—	0.0995	—	39	5.20	0.2047	—	—	—	0.3390	—	R	19.05	0.7500	3/4	51.00	2.0079	—
—	0.0310	—	68	—	0.1015	—	38	—	0.2055	—	5	8.70	0.3425	—	—	19.45	0.7656	49/64	52.00	2.0472	—
0.79	0.0313	1/32	—	2.60	0.1024	—	—	5.25	0.2067	—	—	8.73	0.3438	11/32	—	19.50	0.7677	—	52.39	2.0625	2 1/16
0.80	0.0315	—	—	—	0.1040	—	37	5.30	0.2087	—	—	8.75	0.3445	—	—	19.84	0.7813	25/32	53.00	2.0866	—
—	0.0320	—	67	2.70	0.1063	—	—	—	0.2090	—	4	8.80	0.3465	—	—	20.00	0.7874	—	53.98	2.1250	2 1/8
—	0.0330	—	66	—	0.1065	—	36	5.40	0.2126	—	—	—	0.3480	—	S	20.24	0.7969	51/64	54.00	2.1260	—
0.85	0.0335	—	—	2.75	0.1083	—	—	—	0.2130	—	3	8.90	0.3504	—	—	20.50	0.8071	—	55.00	2.1654	—
—	0.0350	—	65	2.78	0.1094	7/64	—	5.50	0.2165	—	—	9.00	0.3543	—	—	20.64	0.8125	13/16	55.56	2.1875	2 3/16
0.90	0.0354	—	—	—	0.1100	—	35	5.56	0.2188	7/32	—	—	0.3580	—	T	21.00	0.8268	—	56.00	2.2047	—
—	0.0360	—	64	2.80	0.1102	—	—	5.60	0.2205	—	—	9.10	0.3583	—	—	21.03	0.8281	53/64	57.00	2.2441	—
—	0.0370	—	63	—	0.1110	—	34	—	0.2210	—	2	9.13	0.3594	23/64	—	21.43	0.8438	27/32	57.15	2.2500	2 1/4
0.95	0.0374	—	—	—	0.1130	—	33	5.70	0.2244	—	—	9.20	0.3622	—	—	21.50	0.8465	—	58.00	2.2835	—
—	0.0380	—	62	2.90	0.1142	—	—	5.75	0.2264	—	—	9.25	0.3642	—	—	21.83	0.8594	55/64	58.74	2.3125	2 5/16
—	0.0390	—	61	—	0.1160	—	32	—	0.2280	—	1	9.30	0.3661	—	—	22.00	0.8661	—	59.00	2.3228	—
1.00	0.0394	—	—	3.00	0.1181	—	—	5.80	0.2283	—	—	—	0.3680	—	U	22.23	0.8750	7/8	60.00	2.3622	—
—	0.0400	—	60	—	0.1200	—	31	5.90	0.2323	—	—	9.40	0.3701	—	—	22.50	0.8858	—	60.33	2.3750	2 3/8
—	0.0410	—	59	3.10	0.1220	—	—	—	0.2340	—	A	9.50	0.3740	—	—	22.62	0.8906	57/64	61.00	2.4016	—
1.05	0.0413	—	—	3.18	0.1250	1/8	—	5.95	0.2344	15/64	—	9.53	0.3750	3/8	—	23.00	0.9055	—	61.91	2.4375	2 7/16
—	0.0420	—	58	3.20	0.1260	—	—	6.00	0.2362	—	—	—	0.3770	—	V	23.02	0.9063	29/32	62.00	2.4409	—
—	0.0430	—	57	3.25	0.1280	—	—	—	0.2380	—	B	9.60	0.3780	—	—	23.42	0.9219	59/64	63.00	2.4803	—
1.10	0.0433	—	—	—	0.1285	—	30	6.10	0.2402	—	—	9.70	0.3819	—	—	23.50	0.9252	—	63.50	2.5000	2 1/2
1.15	0.0453	—	—	3.30	0.1299	—	—	—	0.2420	—	C	9.75	0.3838	—	—	23.81	0.9375	15/16	64.00	2.5197	—
—	0.0465	—	56	3.40	0.1339	—	—	6.20	0.2441	—	—	9.80	0.3858	—	—	24.00	0.9449	—	65.00	2.5591	—
1.19	0.0469	3/64	—	—	0.1360	—	29	6.25	0.2460	—	D	—	0.3860	—	W	24.21	0.9531	61/64	65.09	2.5625	2 9/16
1.20	0.0472	—	—	3.50	0.1378	—	—	6.30	0.2480	—	—	9.90	0.3898	—	—	24.50	0.9646	—	66.00	2.5984	—
1.25	0.0492	—	—	—	0.1405	—	28	6.35	0.2500	1/4	E	9.92	0.3906	25/64	—	24.61	0.9688	31/32	66.68	2.6250	2 5/8
1.30	0.0512	—	—	3.57	0.1406	9/64	—	6.40	0.2520	—	—	10.00	0.3937	—	—	25.00	0.9843	—	67.00	2.6378	—
—	0.0520	—	55	3.60	0.1417	—	—	6.50	0.2559	—	—	—	0.3970	—	X	25.00	0.9844	63/64	68.00	2.6772	—
1.35	0.0531	—	—	—	0.1440	—	27	—	0.2570	—	F	—	0.4040	—	Y	25.40	1.0000	1	68.26	2.6875	2 11/16
—	0.0550	—	54	3.70	0.1457	—	—	6.60	0.2598	—	—	10.32	0.4063	13/32	—	26.00	1.0236	—	69.00	2.7165	—
1.40	0.0551	—	—	—	0.1470	—	26	—	0.2610	—	G	—	0.4130	—	Z	26.99	1.0625	1 1/16	69.85	2.7500	2 3/4
1.45	0.0571	—	—	3.75	0.1476	—	—	6.70	0.2638	—	—	10.50	0.4134	—	—	27.00	1.0630	—	70.00	2.7559	—
1.50	0.0591	—	—	—	0.1495	—	25	6.75	0.2656	17/64	—	10.72	0.4219	27/64	—	28.00	1.1024	—	71.00	2.7953	—
—	0.0595	—	53	3.80	0.1496	—	—	6.75	0.2657	—	—	11.00	0.4331	—	—	28.58	1.1250	1 1/8	71.44	2.8125	2 13/16
1.55	0.0610	—	—	—	0.1520	—	24	—	0.2660	—	H	11.11	0.4375	7/16	—	29.00	1.1417	—	72.00	2.8346	—
1.59	0.0625	1/16	—	3.90	0.1535	—	—	6.80	0.2677	—	—	11.50	0.4528	—	—	30.00	1.1811	—	73.00	2.8740	—
1.60	0.0630	—	—	—	0.1540	—	23	6.90	0.2717	—	—	11.51	0.4531	29/64	—	30.16	1.1875	1 3/16	73.03	2.8750	2 7/8
—	0.0635	—	52	3.97	0.1563	5/32	—	—	0.2720	—	I	11.91	0.4688	15/32	—	31.00	1.2205	—	74.00	2.9134	—
1.65	0.0650	—	—	—	0.1570	—	22	7.00	0.2756	—	—	12.00	0.4724	—	—	31.75	1.2500	1 1/4	74.61	2.9375	2 15/16
1.70	0.0669	—	—	4.00	0.1575	—	—	—	0.2770	—	J	12.30	0.4844	31/64	—	32.00	1.2598	—	75.00	2.9528	—
—	0.0670	—	51	—	0.1590	—	21	7.10	0.2795	—	—	12.50	0.4921	—	—	33.00	1.2992	—	76.00	2.9921	—
1.75	0.0689	—	—	—	0.1610	—	20	—	0.2810	—	K	12.70	0.5000	1/2	—	33.34	1.3125	1 5/16	76.20	3.0000	3
—	0.0700	—	50	4.10	0.1614	—	—	7.14	0.2813	9/32	—	13.00	0.5118	—	—	34.00	1.3386	—	—	—	—
1.80	0.0709	—	—	4.20	0.1654	—	—	7.20	0.2835	—	—	—	0.5156	33/64	—	34.93	1.3750	1 3/8	—	—	—

M = Millimeters, DE = Decimal Equivalents, F = Fractional, DN = Drill Number/Letter

OEM
Application List

BMW®/Mercedes Benz®
Body
102STMML.....1/4 2PC BU..... 111, 701
106FLIPSET .....1/4DR 6PC ME..... 117
AWSGTRP20 .....MER MIR 267
FLCE120 .....3/8DR E12..... 151, 701
RRT105.....CAR STER R 706
S6810.....10MM FLIP SCK 117
Brake
BBW1270 .....3PC 11MM BRK B 694
FSE200 .....E20 UNVRSAL..... 151
S6111 .....BRK WR 11M 694
Cooling System
HCP10.....PLIERS 635
RCR1 .....RAD CP REM 630
SVT275 .....COOL SYST.....633
TA245A .....RAD TES 632
TA246A.....RAD TES 632
TA32A .....RAD TES 632
TA33A .....RAD TES 632
TA345A .....RAD TES 632
TA346A.....RAD TES 632
TA44 .....RAD TES 632
TA445 .....RAD ADAP BMW 632
TA446.....RAD CP ADAP 632
TA45 .....RAD CP 632
TAB10044 .....RAD ADAP MER 633
TAB10345.....RAD ADAP BMW 633
YA6210 .....BMW FAN CLUT 634
Diagnostics
EETM306A09 .....COIL ON PLUG 761
EETM306A10.....COIL ON PLUG 761
EETM306A11 .....COIL ON PLUG 761
EETM306A12.....COIL ON PLUG 761
Diesel
EEDF400-8.....EGR/IND CLNSYS.... 416
S6104B.....FUEL INJ SOC 415
Engine Service
ADT30KT.....ALT PULLEY KIT 657
FSE180 .....E18 UNIVERSA..... 151
IMSLE240 .....E24 TORX IMP 204
MCH1280.....MER CAM HOL.....654
SBIT2.....STRETCH BELT 659
SBT60.....SERP BELT WRN.....659
STLE80 .....1/4DR DEE.....114
TSE80.....UNIV INTRNL 115
TSS7KIT .....TRIPLE SQU.....159, 197
Fuel & Engine Systems
IPK1180.....FUEL INJ PULLER 544
LDTJT5.....JIFFY-TITE SET 547
Lubrication
106FLIPSET .....1/4DR 6PC ME..... 117
A127 .....27MM OIL FIL 645
S3624 .....36/24MM 414, 645
S6810.....10MM FLIP SOCK..... 117
Miscellaneous Tools
305STSMSE .....1/2 5PC ST..... 197
FABLM4E .....LONG BALL HE..... 158
FAM11E .....HEX DRIVER.....157
STLE70 .....E8 TORX SOCKET.....114
Spark Plug Tools
S9714MK .....14MM SPARK P..... 373
S9714MKFUA 6PT 3/8DR 372
S9714MKL.....14MM SPARK P..... 373
S9714MKMAG....14MM SPARK P..... 372
SBP3 .....PLIERS 370
Testing & Electronics
SGTT110 .....10PC TERMINA..... 537
SGTT5A.....TERMINAL TOO 537
SGTT6A.....TERMINAL TOO 537
Tire & Wheel
GAW1290.....ALIGN WRENCH 591
IMDM270.....27MM SOCKET.....200
IMDM320.....32MM 1/2 ..... 200, 585
IMDM410 .....1/2 12PT..... 200, 590
SIMDM300 .....1/2DR 30M..... 202, 585
WHB1.....14MM X 1.25 WH.....583
Transmission/Drive Line
FHRM14 .....14MM 3/8DR.....599
FHRM7 .....7MM 3/8DR 599
FHRM8.....8MM 3/8DR.....599
FLEPL100 .....10EPL TORX P 151
IMDM360 .....36MM 1/2D.... 200, 596
M3587 .....3/4DR PI 596

Chrysler®/Dodge®
Body
B1359B .....BRAKE RETAIN.....693
B1467A.....BR WRENCH ...690, 694
BB300B39GC.....GM/CHRY ADAP 688
BB300B47G.....CHRY ADAPTOR 688
BT1360 .....BRAKE RETAIN.....693
S6111 .....BRAKE WR 11M 694
YA8610B.....7PC BRAKE CA.....692
Brake
B1359B .....BR RET 693
B1467A.....BR WRENCH ...690, 694
BB300B39GC.....GM/CHR ADP 688
BB300B47G.....CHR ADP 688
BT1360 .....BR RET 693
S6111 .....BR WR 11M 694
YA8610B.....7PC BR CA.....692
Cooling System
HCP20 .....PLIERS 635
SVT262-28A.....COOL SYS 632
SVT262-29.....RAD CAP ADP 632
TA38C.....CAP ADP 632
TA39A.....44MM CAP ADP.....632
TA58 .....DODG SPRNT 632
TA59 .....DODG SPRNT 632
TAB10044 .....RAD ADP MER.....633
YA6160 .....FAN CLU W 634
YA9980.....PULLEY TOOL 634
Diagnostics
EETM306A04 .....COIL ON PLG 761
EETM306A14.....COP11 ADP 761
Diesel
A129 .....29MM FU FI..... 414
CJ140 .....DIES PUL.....409
Engine Service
A119B .....OIL PRES..... 655
A121A.....SOCKET 655
CGH1236.....CAM GR HLDR 654
CJ124A .....P/S PULL..... 394, 657
YA6490A .....HARM PUL.....394, 660
YA9350B.....SERP B.....658
YA9350B1 .....SERP B.....658
Fuel & Engine Systems
EEPV313C.....COMP ADPT ... 407, 540
FID8329.....NOID LIGHT..... 545
LDTJT5.....JIFFY-TITE SET 457
Lubrication
OFHON33.....HONDA OIL FI 648
OFKIT.....OIL FILTER KIT.....649
Miscellaneous Tools
STLE40 .....E4DEEPTORX.....114
STLE50 .....E5DEEPTORX.....114
Motorcycle Service Tools
S9704RHS .....13/16 RETE..... 373, 420
S9724RHS .....5/8 RETENT.... 373, 420
Pullers
CJ131P.....PULLER SET.....393
CJ134 .....PULLER 393
Spark Plug Tools
YA6845.....SPARK PLUG B.....371
Testing & Electronics
SGTT110 .....10PC TERMINA..... 537
YA961 .....120V MEMORY 536
Tire & Wheel
BJP1.....BALL JNT P..... 589, 600
BJP1-18A .....BALL JNT ADPT.....589
BJP1-26A.....BALL JNT ADPT.....589

DHP1.....DODGE HUB PU..... 595
ITRS22.....22MM INNER T..... 593
LSR1000A.....WHEEL LOCK K..... 583
LSR1560.....THINWALL FLI..... 581
LSR1570.....THNWALL FLP..... 581
LSRM2000.....MET LUGNU..... 581
S6109A.....SOCKET..... 584
S6146.....SOCKET..... 584
S9365B.....SOCKET..... 590
S9479A.....SOCKET..... 590
SIM540A.....DODGE AXLE..... 585
SIMDM300.....1/2DR 30..... 202, 585
SNS2467.....4 LUG 4WD SPIND..585
SNS2770.....6 LUG 4WD SPIND..585
YA1005C.....LUGNUT RMVR..... 582
YA2218.....18MM TIE ROD..... 592
YA2223.....15.5MM TIE R..... 592

Transmission/Drive Line

CJ193-1-1.....TRS PUL ADPT..... 600
FHRM10.....10MM 3/8DR..... 599
FHRM7.....7MM 3/8DR..... 599
IMDM360.....36MM 1/2..... 200, 596
M3586.....3/4 DR..... 596
M3587.....3/4 DR PI..... 596
PRT600A.....TRANSMISSION..... 599

Valve Service

YA188LR.....INSTALL HARM..... 660
YA188LR-3.....M14X1.5 SCREW..... 660
YA188LR-5.....M12X1.75 SCREW..... 660
YA6490A.....HARM PULL....394, 660
YA9140B.....VALVE SPRING..... 664

Ford®

Body

102STMML.....1/4 2PC BU..... 111, 701
A161B.....DOOR TOOL..... 702
ASG185BR.....INSTINCT TRI..... 701
ASGD102BR.....2PC DISHED T..... 701
RRT105.....CAR STEREO R..... 706
S8703.....SOCKET..... 706
YA1201.....DR PL REM..... 700
YA7575.....FRD REMOVAL..... 706

Brake

B1359B.....BR RETAIN..... 693
B1467A.....BR WRENCH...690, 694
BT1360.....BR RETAIN..... 693
IMSLE180.....1/2DR E18..... 204
S6111.....BR WR 11M..... 694
YA8610B.....7PC BRAKE CA..... 692

Cooling System

HCP10.....PLIERS..... 635
HCP20.....PLIERS..... 635
TA246A.....RAD TES..... 632
TA32A.....RAD TES..... 632
TA33A.....RAD TES..... 632
TA34A.....RAD TES..... 632
TA46.....RAD TES..... 632
TA47.....RAD CAP..... 632
TAB10034.....RAD ADAP FOR..... 633
TAB10046.....RAD ADAP FOR..... 633
YA6180.....FAN CLUTCH....415, 635
YA9526.....FAN WRENCH..... 634

Diesel

EEDF400-1.....EGR ADP..... 416
EEDF400-2.....EGR ADP..... 416
EEDF400-11.....EGR ADP..... 416
FFW2.....DUAL FUEL OI..... 412
FGPT.....FORD GLOW PL..... 412
K1820A.....T70 TORX SOC..... 195
MB5D.....BRI BR.....407, 408, 413
MB73A.....BRUSH..... 413
PSWT10K.....10MM POWERST..... 413
S6196KR.....FORD ICP SEN..... 412
S6210.....3/8 DRIVE..... 413
S6340E.....T40 TORX SOC..... 414
TAP1225.....TURB VANE PLR..... 413
YA1140.....CRWFT SOC SET..... 414

Engine Service

A119B.....OIL PRESS..... 655
A121A.....SOCKET..... 655
ADT30KT.....ALT PULLEY KIT..... 657
CJ124A.....P/S PULLER....394, 657
FRT12.....THREE VALVE...371, 656
FTXEL40E.....XTR LNG TORX..... 156
S6160.....12MM 8IN L.....417, 656
S6193.....10MM SOCKET..... 656
S6194.....12MM SOCK....417, 656
YA7200.....MDULE WRNCH..... 661
YA9350B.....SERPENTINE B..... 658

Fuel & Engine Systems

EEDF502.....FUEL PRESS TEST....543
EEPV314C.....DIES COMP ADPT....540
EEPV317C.....DIES COMP ADPT....540
EEPV5G16T.....M16x1.5 TRIT..... 539
S8564B.....DIST WR..... 550
S9707.....DIST WR..... 550
SWR1.....OXYGEN SENSO..... 548
YA6465.....IGN WRENCH..... 551

Heavy Duty Truck Tools

S6190A.....FORD IPR SOC..... 417
SRD35.....FORD DIESEL..... 419
SRDM624.....LONG 24MM TO..... 419

Heavy Duty Vehicle Diagnostics

EEHD883048U...LT MED TRUCK..... 773
EEHD883048.....LT MED TRUCK..... 773
EEHD883076.....OBDII LIGHT..... 773

Lubrication

OFGMFORD.....GM AND FORD..... 648
OFHON33.....HONDA OIL FI..... 648
S3624.....36/24 MM.....414, 645
OFKIT.....OIL FILTER KIT.....649

Miscellaneous Tools

FTXR40TPE.....3/8DR T40..... 156

Motorcycle Service Tools

S9704RHS.....13/16 RETE..... 373, 420
S9724RHS.....5/8 RETE..... 373, 420

Pullers

CJ131P.....PULLER SET..... 393
CJ132-8.....INST 4.6L..... 395
CJ134.....PULLER..... 393
CJ138.....PULLEY INSTL..... 394

Spark Plug Tools

FRT10.....FORD SPK P..... 371
FSPK.....FORD SPK P..... 370
FSPPRK.....FORD PORC..... 370
S9714MKL.....14MM SPK P..... 373
S9714MKMAG....14MM SPK P..... 372
S9716KA.....9/16 SPK..... 373
S9716KL.....3/8DR 9/16..... 372
S9716KLMAG.....9/16 SPK P..... 372
S9716KR.....SPK PLUG S..... 372
YA6845.....SPK PLUG B..... 371

Testing & Electronics

SGTT110.....10PC TERM..... 537
YA500F.....FORD TERM..... 537

Tire & Wheel

ANS7269A.....AXLENUT SOCK..... 584
BJP1.....BALL JNT P..... 589, 600
BJP1-25A.....BALL JNT ADPT..... 589
BJP1-27A.....BALL JNT ADPT..... 589
FHP1.....FORD HUB PUL..... 595
IMFMS21.....SEMI DEEP SK..... 163
IPFM21C.....3/8 21MM 6..... 165
IPLFM21A.....3/8DR DEE..... 166
IPSFM21A.....21MM SEMI DE..... 165
IPSM18.....1/2DR 18MM S..... 204
IPSM21.....21MM SEMI DE..... 204
IPSM22.....1/2DR 22MM S..... 204
LSR1570.....THNWALL FLP..... 581
S6109A.....SOCKET..... 584
S6146.....SOCKET..... 584
SIMML210.....1/2DR 21M.....203, 583
SNS2467.....4 LG 4WD SPIN..... 585
SNS2770.....6 LG 4WD SPIN..... 585
SNS3195.....4 LG W EXT SPIN..... 585

SNS3246 .....4 WD SPIN NUT..... 585
YA2224 .....TIE ROD WR..... 592
Transmission/Drive Line
211EFTXRTPY .....TR TORX PLUS .. 119, 156
CJ193 .....PULLER SET..... 600
CJ193-1-1 .....TRS PUL ADPT 600
FIH9057B .....FD TRAN DISC.....598
IPDF12A .....3/8 12P..... 165
LDTM3812.....TRANS OIL CO 598
M3586.....3/4 DRIVE 596
PFSXM914B .....14MM SIVEL E 154
PRT600A.....TRANSMISSION.....599
YA7244A.....TRANS TOOL 598
YA7646.....FORD CLUTCH 600
Valve Service
YA188LR .....INST HARM BAL..... 660
YA188LR-2.....M12X1.5 SCREW 660

GM®
Air Conditioning
ACT106B .....INSTALLER 627
ACTUVGUNP3.....PAG OIL.....125,622
Battery Service
YA249.....BOX WRENCH..... 615
Body
102STMML.....1/4 2PC BU..... 111, 701
A161B .....DOOR TOOL 702
A177A .....PAD TOOL 702
A179A .....PAD TOOL 702
ASGD102BR .....TRIM PAD SET..... 701
S6103A.....TRIM DRI.....702
S6810.....8MM 10MM FL SK.... 117
S9610.....SOCKET 704
S9614A.....TRIM DRI.....702
YA1201.....DR PL REM 700
YA6620.....GM DR HING.....703
Brake
B1467A.....BR WR.....690, 694
B1468.....BR TOOL 691
B1470 .....WRENCH 694
BB300B39GC.....GM/CHR ADP 688
BT10 .....BR SPR TOOL..... 689
BT13.....BR SPR INST.....N/A
BT1360 .....BR RET 693
BT14 .....BR SPR REM .....N/A
BT27 .....GM BR SPR 689
S6110A .....BR WR.....690, 694
S6111 .....BR WR 11M 694
S8184.....BR WR.....694
STX70E .....T70 TORX SOC.....195
YA8610B .....7PC BR CA.....692
Cooling System
A4503A.....GM X AND J B.....632
HCR1.....HTR HOSE COU.....634
LDT4 .....JIFFY-TITE CON .....N/A
SVT262-28A.....COOL SYS 632
SVT262-29.....RAD CAP ADP 632
TA246A.....RAD TEST 632
TA32A .....RAD TEST 632
TA33A .....RAD TEST 632
TA34A .....RAD TEST 632
TA36GM.....RAT TEST A 632
TA37 .....CAP ADAP 632
TA38C .....CAP ADAP 632
TA39A .....44MM CAP ADAP....632
TA56 .....RAD ADAP CHE 632
TA57 .....SPRCHGR CAP.....632
TAB10034 .....RAD ADAP FOR 633
TAB10056 .....RAD ADAP CHE 633
YA6120 .....FAN CLCH W 635
YA6160 .....FAN CLCH W 634
YA6180 .....FAN CLCH W 415, 635
YA9980.....PULLEY TOOL 634
Diagnostics
EETM306A06 .....COIL IN CAP1 761
Diesel
IPK1170.....INJ PLR KIT 415
M3503B.....SOCKET 411
S6122 .....SOCKET .....N/A
SWR3.....WATER SENSOR..... 414
TVS1240 .....TURBO VANE SOC....415
YA6925 .....GM DURAMAX F.....415
Engine Service
A119B .....OIL PRESSURE..... 655
A121A.....SOCKET 655
ADT30KT.....ALT PULLEY KIT..... 657
CJ124A .....P/S PULLER.... 394, 657
CJ147A .....GM PR STRG... 394, 657
SBT12 .....ECOTEC TENS 659
SAM10LE.....1/2D 10MM L..... 196
YA6490A .....HARM PUL.....394, 660
YA6555 .....GM OIL PMP 655
YA9350B.....SERP BELT.....658
YA9350B1 .....SERP BELT.....658
Fuel & Engine Systems
A227.....27MM SOCKET.....544
EEPV312D .....DIESEL COMP ADP..540
FID8320.....NOID LIGT 545
FID8339.....NOID LIGT 545
FID8340.....NOID LIGT 545
FIH500.....FUEL LINE DI.....544
FLR630 .....FUEL TANK TOOL.....544
LDTJT5.....JIFFY-TITE SET 547
M3515.....WRENCH 550
M3564C.....ADAPTOR 540
S6134 .....DIST WR..... 550
S9622 .....DIST WR..... 550
S9626 .....DIST WR..... 550
YA9375A .....OXY SENSO.....548
Lubrication
A106 .....OIL FILTER SOCK.....645
OFA35.....2PC ADPT SET..... 648
OFGMFORD .....GM AND FORD 648
OFKIT.....OIL FILT KIT.....649
OFTOY38.....TOY LEX 648
S3624 .....36/24 MM 414, 645
S9615A .....BOX WRENCH.....645
Miscellaneous Tools
207EFTXY.....TORX DR ST.....155
FLCE180 .....E18 TORX SOCK..... 151
FLEP180 .....18EP TORX PL..... 151
FTX47E.....47 TORX DRV..... 156
FTX47E2.....TORQ BIT 156
FTX500E2.....TORX BIT.....156, 206
GFTX500E .....TORX DRVR 156
IPSM15 .....1/2D 15M 204
PFMTS1E .....MTS1E SUP 160
PSTX500E .....TORX DRVR 206
SHORTORX.....TORX DRVR 316
Motorcycle Service Tools
S9704RHS .....13/16 RETE..... 373, 420
S9724RHS .....5/8 RET..... 373, 420
Pullers
CJ131P.....PULLER SET.....393
CJ132-6 .....INST GM 3.1L.....395
CJ134 .....PULLER 393
CJ145 .....GM PULLER 393
Spark Plug Tools
S9723.....GM SPARK PLU..... 373
Testing & Electronics
EEFF500.....MAIN HARN.....521
GMSTB25.....GM MLTIFUNC 536
SGTT110 .....10PC TERM..... 537
TT12KT .....TERM TL 537
YA500GM.....TERM TL 537
YAGM1 .....GM AIRBAG RE 536Tire & Wheel
ANS1929A.....LCKNT WR 584
ANS1930.....LCKNT WR 584
BJP1.....BALL JNT P..... 589, 600
CC6630 .....GM CAMB CA 591
IMFMS21.....SEMI DP SOC 163
IPFM21C.....3/8 21MM 6 165
IPSFM21A.....21MM SEM DP..... 165
IPSM21 .....21MM SEM DP.....204
IPSM22.....1/2D 22MM S 204

LSR1000A .....WHL LOCK K 583
LSR1560 .....THINWALL FLI 581
S6109A.....SOCKET 584
S6146.....SOCKET 584
SIMDM300 .....1/2D 30MM.... 202, 585
SIMM360TW.....1/2D 36MM.... 203, 585
SNS2467 .....4 LG 4WD SPDL 585
SNS2770 .....6 LG 4WD SPDL 585
SNS3246 .....4 WD SPDL NT 585
WA7500.....GM STRUT TL..... 593
YA2223 .....15.5MM TIE R..... 592
YA2224 .....TIE ROD WR..... 592
Transmission/Drive Line
FHRM10 .....10MM 3/8D 599
FIH9057B.....FD TRAN DISC.....598
FLEL80.....3/8DR E8 151
FLEPL100 .....10EPL TORX P 151
IMDM360 .....36MM 1/2D.... 200, 596
IPDF12A .....3/8DR 12P..... 165
M3587 .....3/4DR PI 596
PFMTS4E.....MTS4E SPR 160
PRT600A.....TRANS 599
S6657.....1/2D 57MM 12 596
SRP1C .....PLRS.....599
YA3050 .....BOOT PLRS 596
YA3080.....BOOT PLRS 596
YA9348.....SEAL REM 600
YA9648.....GM TRAN TL 600
Valve Service
CJ146 .....PULL SET.....394, 660
S6132A .....SOCKET 656, 662
S6158 .....ENG BAR SKT.....662
YA188LR .....LNG RCH HAR BL ... 660
YA188LR-1.....CEN SCR M16 660
YA6470.....GM HARM 660
YA6490A .....HARM PUL.....394, 660
YA6491A .....YA9740 UPD...394, 660
YA9140B .....VAL SPRG.....664

Honda®/Acura®

Body
DPTM10 .....8MM SOCKET..... 123
DPTM8.....10MM SOCKET 123
Brake
S6110A .....BRAKE WR.....690, 694
YA8610B .....7PC BRAKE CA.....692
Cooling System
SVT262-28A.....COOLING SYS 632
SVT262-29.....RAD CAP ADP 632
TA38C.....CAP ADP 632TA39A
44MM CAP ADP.....632
YA9190 .....UNV DRN SKT.....630
Diagnostics
EETM306A08 .....COP4 ADP A 761
Engine Service
ADT30KT.....ALT PUL KIT 657
S6193 .....10MM SOC.....656
S6194 .....12MM SOC 417, 656
YA2675A .....SWIV ADP 605
Fuel & Engine Systems
S6154 .....OXY SEN WR.....548
S6176 .....OXY SENS SOC 548
SWR4 .....SHLD OXY 548
Lubrication
OFA33.....OIL FIL ADP..... 648
OFHON33.....HON OIL FI 648
OFKIT.....OIL FIL KIT 649
Miscellaneous Tools
DPSM16 .....16MM SOC 205
Motorcycle Service Tools
HXD22 .....22MM HEX SOC.....420
Spark Plug Tools
S9714MKL.....14MM SPRK P..... 373
S9714MKMAG....14MM SPRK P..... 372
Testing & Electronics
SGTT110 .....10PC TERM 537
SGTT7 .....TERM TOOL 537
SGTT8.....TERM TOOL 537
SGTT9.....TERM TOOL 537
Tire & Wheel
BJP1-22A .....BALL JNT ADPT.....589
BJP1-24A .....BALL JNT ADPT.....589
BJP1HONDA.....HON BALL JNT.....589
FPS32E .....SHRT NUM 160
LSRM2000.....MET LUGNT 581
YA6510 .....HON/ACU 591
YA6510-2 .....ACU INTEG 591
YA6810 .....HON BUSH.....593
Valve Service
S6132A .....SOCKET 656, 662
YA6010A .....HRM DMP TL 660
YA9140B .....VAL SPRG.....664

Nissan®/Subaru®

Brake
S6110A .....BRAKE WR.....690, 694
YA8610B .....7PC BRAKE CA.....692
Cooling System
SVT262-28A.....COOLING SYS 632
SVT262-29.....RAD CAP ADP 632
TAB10036 .....GM FORD JAG 633
Engine Service
S6160.....12MM 8IN L..... 417, 656
S6193 .....10MM SOCKET 656
S6194 .....12MM SOCK.... 417, 656
S6214 .....SUBARU HEADB 656
YA9680 .....CAMSHFT TOOL.....653
Fuel & Engine Systems
M3566C.....ADAPTOR 540
S6176 .....OXY SENS SKT.....548
SWR4 .....SHIELDED OXY 548
Lubrication
OFHON33.....HON OIL FI 648
Miscellaneous Tools
FLCE160 .....E16 TORX SOC 151
PFMTS1E .....MTS1E SUP..... 160
Spark Plug Tools
S9714MK .....14MM SPRK P..... 373
S9714MKFUA 6PT 3/8DR 372
S9714MKL.....14MM SPRK P..... 373
S9714MKMAG....14MM SPRK P..... 372
S9714MKR .....14MM SPRK P..... 372
Testing & Electronics
SGTT6A.....TERM TOOL 537
Tire & Wheel
BJR1.....BALL JNT SOC 590
BJR2 .....BALL JNT SOC 590
BWDM412 .....IMP SOC 587
YA2224 .....TIE ROD WR.....592
YA6870.....SUBU REAR 592
YA6870-1 .....6PT 22MM 16 592
YA6870-2.....17MM/19MMC 6.....592
Transmission/Drive Line
FTX50TPE.....TORX PLS BI 156
IPLFM16A.....16MM 6PT DP..... 166
K1820A.....T70 TORX SOC.....195
SLEPL200 .....20EPL TORX P..193, 598
Valve Service
YA6380.....CAM SEAL INS 663
YA9140B .....VALVE SPR.....664

Toyota®/Lexus®/Scion®

Body
ASGD102BR .....TRIM PAD TL ST..... 701
Brake
BT20.....BR SPR TL..... 689
S6004 .....BR ADJ TL 691
S6005 .....BR ADJ TL 691
YA8610B .....7PC BR CA.....692
Cooling System
HCP10.....PLIERS 635
TAB10048 .....RAD ADAP TOY 633
YA9190 .....UNV DRN SKT.....630
Diagnostics
EETM306A05 .....COIL INCAP2 I..... 761
EETM306A13.....COIL ON PLUG 761
EETM306A14.....COP11 ADPTR 761
Engine Service
ADT30KT.....ALT PULLEY KIT 657

FADM8E.....8MM/HEX SCKT 158
FADM8LE .....8MM LNG DBL.....158
S6193 .....10MM SOC..... 656
S6194. .....12MM SOC 417, 656
SADM10E.....10MM DLB HEX 196
YA1350.....TOY WATER PUM..... 657
YA65500 .....TOY LEX 661
YA6551.....TOY/LEX V6 C 661
YA9350B.....SERP B..... 658
YA9680 .....CAMSHFT TL..... 653
YA9730 .....TMG BLT TL..... 653

Fuel & Engine Systems

M3565C .....ADAP 540
M3566C.....ADAP 540
SWR4 .....SHIELDED OXY 548
YA6675 .....SHIELDED O2 548

Lubrication

OFA38 .....OIL FILT ADP 648
OFKIT.....OIL FILT KIT.....649
OFTOY38.....TOY LEX 648
OFTOY468 .....TOY OIL FILT..... 647
OFWTOY3KTA .....TOY 3PC O..... 647

Miscellaneous Tools

FLCE140 .....E14 TORX SOC 151
FLCE160 .....E16 TORX SOC 151

Spark Plug Tools

S9714MK .....14MM SPK P..... 373
S9714MKFUA 6PT 3/8D 372
S9714MKL.....14MM SPK P..... 373
S9714MKMAG....14MM SPK P..... 372

Testing & Electronics

SGTT110 .....10PC TERMINA.....537
SGTT7 .....TERM TOOL 537
SGTT8.....TERM TOOL 537
SGTT9.....TERM TOOL 537

Tire & Wheel

B2193 .....3/8DR 5PT 588
IMDM390 .....39MM 1/2 .....200, 585
LSR1560 .....THINWALL FLI 581
LSRM2000.....METRIC LUGNU 581
SIMDM300 .....1/2D 30M.....202, 585
YA2218 .....18MM TIE ROD..... 592
YA6540.....AXLE LOCK NUT KI 585

Transmission/Drive Line

FHRM12 .....12MM 3/8D 599
PFSXM910B .....10MM SWIVEL 154
PFSXM912B .....12MM SWIVEL 154

Valve Service

M2112PK.....2PK OF LEX..... 665
M2113 .....LEX V8 SPR 665
YA6380.....CAM SEAL INS 663
YA8825.....VALV TOOL 662

VW®/Audi®

Body

RRT105.....CAR STER R 706
S8703.....SOCKET 706

Brake

BB300B19.....VW ADP 688
BBW1270 .....3PC 11MM BR B 694
FTSM4E .....4MM TRIP S 159, 692
FTSM5E.....5MM TRIP S..... 159, 692
FTSM6E .....TRIP SQ DR..... 159, 692
S5912 .....BR TOOL 691
S6111 .....BR WR 11M 694
YA8610B .....7PC BR CA..... 692

Cooling System

HCP10.....PLIERS 635
TA16B .....RAD TES..... 632
TA23A .....RAD TES..... 632
TA30A.....RAD TES..... 632
TA31A.....RAD TES..... 632
TA40 .....RAD CAP 632
TA41.....RAD TES..... 632
TAB10022 .....RAD ADP VW 633
TAB10031.....RAD ADP VW 633
TAB10041.....RAD ADP AUD..... 633
YA6210 .....BMW FAN CL 634

Diagnostics

EETM306A07 .....COIL ON PLG 761

Diesel

IPK1220 .....INJ PULL KIT.....415
S6104B.....FUEL INJ SOC 415

Engine Service

ADT30KT.....ALT PULLY KIT 657
FTSM8E .....TRIP SQ DR.....159
FTSM10E.....TRIP SQ DR.....159
S5902.....WRENCH 598, 655
SADM10E.....10MM DLB HEX 196
SPDL10E .....NO10 POLYDR..... 198
STSM10LE.....10MM TRP SQ SO 197
STSM12E.....TRIP SQ DR.....197
STSM14E.....14MM TRIP.....197
STSM16E.....16MM TRIP.....197
STSM18E.....18MM TRIP.....197
TSS7KIT .....TRIP SQ..... 159, 197
YA6760.....VW AUDI TIME 661
YA8640 .....CAM WRENCH 661

Fuel & Engine Systems

GANM27 .....3/8 27MM C..... 547
SWR2.....SQ DR..... 548

Lubrication

S3624 .....36/24 MM 414, 645

Miscellaneous Tools

S6324 .....24MM SKT 205

Testing & Electronics

SGTT110 .....10PC TERM.....537

Tire & Wheel

GAW1290.....ALIG WRN 591
IMDM320.....32MM 1/2D.....200, 585
LAWM17E.....3/4DR 17M.....216
LAWM19E.....3/4DR 19M.....216
SIMDM300 .....1/2DR 30M.....202, 585
YA8730.....NUT SOC 593

Transmission/Drive Line

CPT110A.....SOCKET 422, 599
FHRM7 .....7MM 3/8D 599

Valve Service

YA8825.....VALVE TOOL 662
YA8825-1 .....SPAC WDGE .. 662DHP1

1/8"

1/8" Square Drive Tools
General Service Sets.....124

1/4"

1/4" Drive Ratchets, Sockets, & Accessories, TOOLS@HEIGHT..... N220-N223

1/4" Square Drive Tools
Adaptors.....106, 109, 123, 128, 144
Bit Socket Sets..... 117–120, 131–135, 155–159, 180–181, 212
Bit Sockets..... 117–121, 131–135, 155–159, 180–181, 212
Breaker Bars 106, 127
Crowfoot Wrenches..... 258
Chrome, Sockets, Flank Drive® 110–115
Extensions 108–109, 121, 128
FOD Ratchets.....105
General Service Sets..... 124–126, 135–136
Handles 106–107
Hi-Lok® Ratchet 105
Impact Accessories..... 121
Impact Sockets, Flank Drive® 122
Impact Wrench, Air 470
Impact Wrench, Cordless..... 453
Power Accessories.....123
Power Sockets.....123–124
Ratchet Adaptors.....106
Ratchet Spinners.....106, 127
Ratchets 103–105, 112, 127
Ratchets, Air 471–472
Ratchets, Cordless..... 454
Sockets, Blue-Point® 129–130
Sockets, Flip 117
Sockets, Low Profile 112–113, 115
Sockets, Special Application..... 116–117, 120, 123
Sockets, Spline® 116
Sockets, TORX® 114–115, 117–119, 130–131, 628
Torque Wrenches.....276–283
Torque, Drivers..... 285
Torque, Square Drive Heads 287
Universal Joints 109, 128, 145

3/8"

3/8" Drive Ratchets, Sockets, & Accessories, TOOLS@HEIGHT N224-N227

3/8" Square Drive Tools
Adaptors.....109, 142, 144–145, 154, 162, 168, 177
Bit Socket Sets, Blue-Point®..... 134–135, 180–181
Bit Sockets..... 117–120, 134–135, 155–160, 168, 179–181, 212
Breaker Bars 142, 178
Chrome, Sockets, Flank Drive® 146–150, 153

Crowfoot Wrenches..... 258–261
Extensions 143–144, 154, 162, 168, 176–177
FOD Ratchets..... 141
General Service Sets.....136, 170–175, 182–183
Handles 143, 176
Hi-Lok® Ratchet 142
Impact Accessories.....162
Impact Drivers and Sets 161
Impact Sockets, Flank Drive®..... 163–166
Impact Sockets, Swivel 165–166
Impact Wrench, Air 466–467, 469–470
Impact Wrench, Cordless..... 448–449, 453
Magnetic, Surface Drive Sockets..... 169
Power Accessories.....168
Ratchet Adaptors.....142
Ratchet Spinners.....142, 176
Ratchets 138–142, 148–149, 175, 182
Ratchets, Air 464, 471–472
Ratchets, Cordless.....446, 454
Socket Inserts, Non-marring.....145
Sockets, Blue-Point® 178–183
Sockets, Flip 414, 645
Sockets, Low Profile 148–150
Sockets, Special Application..... 153–154, 156, 166–167
Sockets, Spline 152
Sockets, Surface Drive 169
Sockets, Swivel Ball.....154
Sockets, TORX® ... 150–151, 155–156
Sockets, Universal.....149–152
Torque Adaptors..... 154–155
Torque Wrenches.....276–283
Torque, Square Drive Heads 287
Universal Joints 109, 144–145, 162, 168, 177

1/2"

1/2" Drive Ratchets, Sockets, & Accessories, TOOLS@HEIGHT..... N228-N230

1/2" Square Drive Tools
Adaptors..... 109, 144, 187, 190, 195, 199
Bit Socket Sets, Blue-Point®..... 180–181, 211–212
Bit Sockets..... 134,–135,180–181, 195–198, 211–212
Breaker Bars 187–188, 210
Chrome, Sockets, Flank Drive® 191–194
Crowfoot Wrenches..... 261–262
Drive Handles..... 188
Extensions .. 189–190, 199, 205, 210
FOD Ratchets.....186
General Service Sets..208–209, 212
Impact Accessories.....199
Impact Drivers and Sets 198
Impact Sockets, Flank Drive®..... 200–204
Impact Wrench, Air 466–469
Impact Wrench, Cordless.. 447–449
Impact Wrench, Electric.....460
Power Accessories..... 205
Power Sockets..... 206–207
Ratchet Adaptors.....187
Ratchet Spinners.....187
Ratchets 185–187, 210
Ratchets, Air 472
Sockets, Blue-Point® 211–212
Sockets, Flip 581–582
Sockets, Special Application ... 194, 204–205
Sockets, Spline 194, 407
Sockets, TORX® 193, 195, 206, 211–212
Surface Drive Sockets 207
Torque Adaptors.....195
Torque Wrenches..... 276–283, 583
Torque, Square Drive Heads 287
Universal Joints ...109, 145, 190, 210

3/4"

3/4" Drive Ratchets, Sockets, & Accessories, TOOLS@HEIGHT .N231
3/4" Drive Socket Set in Tool Control Case N013
3/4" Square Drive Tools
Adaptors..... 215, 217
Bit Sockets.....216–217
Chrome, Sockets, Flank Drive®... 215
Extensions 214, 217
General Service Sets.....N013, 221
Handles 214
Impact Accessories..... 217

Impact Sockets, Flank Drive®..... 218–220
Impact Wrench, Air 466–467
Locking Rings and Pins 217
Ratchet Adaptors 215
Ratchet Heads 214
Sockets, Special Application 216
Sockets, Spline 216
Sockets, TORX® 220
Torque Adaptors 419
Torque Wrenches 276–283, 301
Torque, Square Drive Heads 287
Universal Joints 215, 217

1"

1" Square Drive Tools
Adaptors 223–224
Breaker Bars 223
Drive Handles 223
Extensions 223–224
Handles 223
Impact Accessories 224
Impact Sockets, Flank Drive®..... 225–227
Impact Sockets, Oil and Gas 427
Impact Sockets, Railroad..... 428
Impact Wrench, Air 466–467
Locking Rings and Pins 224
Ratchet Heads 223
Sockets, Special Application 227
Sockets, Spline 223
Torque Wrench ... 279, 281–283, 301
Universal Joints 224

1 1/2"

1 1/2" Square Drive Tools
Adaptors 228
Drive Handles 227
Extensions 228
Impact Sockets, Flank Drive®..... 228–230
Locking Rings and Pins 228, 230
Torque Wrenches 281–283, 301
Universal Joints 228

2 1/2"

2 1/2" Square Drive Tools
Impact Sockets, Flank Drive®..... 231–232
Locking Rings and Pins 230, 232

A

Abrasive Blast Cabinet 712–713
Abrasive Wheels 497–498
Abrasives 714
Accelerator Pedal Jack 591, 695
Accessories
Adaptor, Air Line..... 506
Adhesive Sticks 452
Air Hammer, Bits 500–502
Air Hammer, Chucks 475, 501
Air Hoses, Swivels 505
Air Ratchet 488
Air Saw 502–503
Couplers, Air 506
Diagnostic Smoke Machine..... 524–526
Diagnostic Storage ... 763, 770–771, 774
Diesel Fuel Service..... 407, 416
Drill 488–496
ETHOS®..... 758, 763
ETHOS®+..... 744, 755, 763
Grinder 497–499
Impact Wrench, Vinyl Boots 488
Leak Detector 524–526, 622–623
MICROSCAN® III..... 765
MicroVAT™, D-TAC™ 610–611
MODIS™ 758–761
MODIS™ Ultra 747, 756, 758–761, 763
Personality Keys 775
Pocket iQ™ 771
Pro-Link® iQ™ 774
Pro-Link® Ultra 769–770
Sander 496
Scan Tool 758
Scope and Meter 513–514, 759–761
Screwdriver..... 323
Socket, Ratchet, 1/4" Drive..... 109, 127–128
Socket, Ratchet, 3/8" Drive..... 144–145, 176–177
Socket, Ratchet, 1/2" Drive..... 190, 210
Socket, Ratchet, 3/4" Drive 214–215
Socket, Ratchet, 1" Drive 223
Socket, Ratchet, 1 1/2" Drive 230
Socket, Ratchet, Spline..... 228
SOLUS™ 758, 763
SOLUS™ Edge 746, 754, 758, 763
SOLUS PRO™ 758, 763
SOLUS Ultra® 754, 758, 763
Tire Changer..... 570, 573
Tool Storage ... 57, 59, 61–62, 68–98
Vantage PRO™ 759–761, 763
VANTAGE™ Ultra .. 745, 759–761, 763
VERDICT® 753, 758–761, 763
VERUS®..... 752, 758–761
VERUS® PRO..... 749, 751, 759–761, 763
Welding 554–556, 558
Wheel Balancer 569, 571
WorkStation..... 93–95
Accessory Box 95
ACR® Bits
Phillips® 315–317, 319, 321–322, 324, 326
Pozidriv®..... 319, 324
Adaptor
1/4" Drive 106, 109, 123, 128, 144
3/8" Drive ... 109, 142, 144–145, 154, 162, 168, 177
1/2" Drive.... 109, 144, 187, 190, 195, 199
3/4" Drive 215, 217
1" Drive 223–224
1 1/2" Drive 228
#5 Spline Drive to Square 228
A/C..... 628
Air Line 506
Amp 513
Arbor 495, 497
Backprobe 515
Ball Joint 589
Banana Plug..... 514–516, 518, 521–522
Battery 517
Bearing, CJ Series 391–392
Bed of Nails 514, 517
Cable..... 759
Cap 524–525, 632–633
Compression 407–408, 412, 540
Cooling System 630–634
Data Cable 744, 746–747, 749, 751, 754, 756, 758, 770–771, 774
Diesel 407–408, 412, 540
Diesel Compression 540
ETHOS®..... 758
ETHOS®+..... 744, 755, 758
European Vehicle..... 744, 746–747, 749, 751–753, 755–756, 758
Extension..... 162, 190, 199
Hand Wheel 401
Hex to Square..... 109, 117, 123, 145, 168, 321–323
Hydraulic Gauge Mounting 401
Ignition..... 745, 749, 751, 761
Internal Square 348
Intrusive Circuit Testing Adaptor..... 513, 517
Joint Rate Simulator..... 294, 299
Locking..... 162, 190, 199

Magnetic 109, 145, 322–323
MODIS™ Ultra 747
Multi-Ignition 761
Neck.....526, 630, 632–634
Nonconductive 348
OBD-I..... 744, 746–747, 749, 752–756, 758, 765
OBD-II.....758, 771
Oil Injector..... 628
Pneumatic..... 630
Power 123, 168, 205
Pressure 513, 542
Puller..... 391–393, 400–401, 403–406
Radiator..... 630, 632–633
Ratchet..... 106, 142, 187, 215
RPM.....513
Scope and Meter 513–515, 517, 744–745, 747, 749, 751–756, 758–761, 765, 769–770
Set 109, 123, 144
SOLUS™ Edge 746
Split Lead 760
Square Drive 109, 144, 228
Temperature.....514
Tire Changer.....571, 573
Torque 154–155, 195, 419
Trailer..... 523
Transducer..... 753, 759
Vacuum 524
VANTAGE™ Ultra.....745
VERUS® PRO..... 749
Voltage 513
Wheel Hub Removal.....595
Wrench, Ratcheting 238
Adaptor Sets
Cooling System 633–634
Extension.....109, 123, 144
Fuel Injection 416, 542–543
Torque 154, 195
Adhesive Gun 446, 452
Adjustable Wrenches, Combination / Pipe, Bahco N186
Adjustable Wrenches, Insulated, Bahco N183
Adjustable
Joint Pliers 334, 337, 345–346
Pin Spanner 274, 628
Pliers..... 334, 337, 345–346
Spanner Wrenches 274
Tap Socket 379, 381
Torque Driver 285
Torque Screwdriver..... 285
Torque Wrenches..... 276–286
Wrench 261, 272–274
Wrench, Crowfoot 261
Wrench, External Pipe..... 272
Wrench, Valve Persuader..... 427
Wrenches, TOOLS@ HEIGHT .. N236
Adjusting Wrenches, Carburetor... 549
Advance Timing Lights 422, 535
Aeroprobe FOD Prevention System N071
Aerospace Standards AS954 Hand Tool Listing N076-N079
A-Frame 400
Air Conditioning
Adaptor 628
Connectors 628
Hoses, R134a, R12 625
Leak Detectors 620–623
Manifold Gauges 624
Pulley Pullers 390, 394, 396, 413
Recycling, Recharging System, Hybrid 617
Recycling, Recharging System, R134a 617–618
Replacement Hose..... 625
Sales, Training Materials.....619
Service Kits.....624
Service Tools..... 627–628
Ultraviolet Flashlights..... 623
Valve 626–628
Air Movers..... 727
Air
Accessories..... 488–506
Adaptors, Couplers..... 506
Auxiliary Handle..... 473–474, 489
Aviation Drills..... N114-N115
Blow Guns 504–505
Brush Kits 710
Brushing.....710
Chisels, Punches 500–502
Chuck, Retainer.....475, 501
Chucks, Tire 422, 578–579
Closed Chuck 578
Compressor 710, 718–719
Control Units..... 720
Crud Thug® 486
Cut Off Tool 478–479
Die Grinder 476–478
Drills N114-N115, N127-N129, 473-474
Filter.....645, 709, 752
Finishing Tool..... 482–486
Grinder.....480
Hammer.....464, 475
Hammer Bits 500–502
Hose..... 505
Hose, Swivels..... 505
Impact Wrench 466–470
Impact Wrench Accessories 488, 502
Line Coupler, Adaptor 506
Lubricators, Air Line..... 301, 720
Micro Tools 485
Motor Oil 506
Motor, Torque Multiplier 293
Nibbler 481
Open Chuck 579
Polishers 484–485
Pressure Gauge 576–578
Processing Equipment 720
Ratchet..... 471–472
Ratchet Accessories.....488, 502
Reciprocating Saw.....480–481
Rivet Shavers N115
Sander 482–484
Sander Accessories 496
Saw..... 465, 480–481
Saw Accessories.....502–503
Screwdrivers N130
Shears.....481
Skin Clamp Runner N115
Solvent Gun 724
Swivel Connector..... 505
Tool Accessories..... 488–506
Tool Boots.....488
Tool, Oil 506
Tools, Reference Charts.... 464–465
Tools, Sioux N115, N128-N134
Vacuum 726
Valve 506, 709
Valves, Regulators..... 709

Alignment
Bar, Body.....696
Headlamp 707
Wheel.....589–593
Alligator Clip..... 514–517
Alternator Pulley Installer, Puller..... 394, 657
Aluminum
Screw Starter 317
Wrench 256, 272–273, 277
Amp
Adaptor 513, 760
Probe....513, 611, 745, 747, 749, 751, 756, 760
Analyzer
Carbon Monoxide 526
Gas.....526–527
Timing Light..... 422, 535
Angle
Air Drill 474
Drill Kit 494
Gauge, Torque.....284, 422
Grinder, Air 476–478, 480
Head Wrench..... 256
Locator 600, 678
Angle Meter, Starrett N198
Polisher..... 485
Antenna

Socket 706
Wrench 706
Anti-Camout Bits..... 315–317, 319, 321–322, 324–325
Anti-Fatigue Mats..... 96
Anti-Freeze Testers..... 631
Anti-Seize Compound..... 736
Anti-Vibration Gloves 733
Applications, OEM I26–I30
Apprentice Set..... 431–432
Arbor Adaptor, Hole Saw 495
Arbor Press..... 717
Arm Protectors..... 558
ATI Aviation Tools N83-N113
ATI Bucking Bars N104
ATI Drill Attachments N086
ATI Drills and Accessories N083
ATI Equipment N110
ATI Hi-Lok® & Huck Tools N105
ATI Holesaws N088
ATI Installation Pliers N093
ATI Microstops & Countersinks N090
ATI Rivet Shavers N109
ATI Riveting Tools & Accessories N094
Auger Bits, Bahco N191
Auto Care
Buffing, Cleaning.....95, 736
Automatic Center Punch 353
Automotive
Diesel Service Tools..284, 414–415, 422
Multimeters 511–512
Seat Covers..... 670
Tool Set Building 431–440
Auxiliary Handle 473, 489
Aviation/Aircraft Specialty Tools
Aeroprobe ® FOD Detection System N071
Aeroprobe FOD Prevention System . N071
Aerospace Standards Hand Tools.... N076
Aerospace Standards Hand Tools ...
AS954..... N076-N079
Air Drills, Sioux N115
Air Drills, Snap-on N114
ATI Aviation Tools N83-N113
ATI Bucking Bars..... N104
ATI Drill Attachments N086
ATI Drills and Accessories.....N083
ATI Equipment N110
ATI Hi-Lok® & Huck Tools N105
ATI Hole saws N088
ATI Installation Pliers N093
ATI Microstops & CountersinksN090
ATI Rivet Shavers N109
ATI Riveting Tools & Accessories..... N094
Aviation & FOD Hand Tools..... N070-N075
Aviation Tire Service Tools.....N116
Aviation Tool Sets N056-N067
Bits, WERA and Zephyr..... N080, N082
Commercial Aviation Tool Sets N055
ControlTech™ Lightweight Torque . Wrenches..... N074
Digital Borescope Kit N117
Digital Inspection Kit N117
Dog Boxes.....N068
Dog Boxes.....N068
Drill Bits..... 494
Dzus® Screwdriver..... 311
Flight Line Roll Cabinets.....N069
Flight Line Roll Cabinets.....N069
FOD & Aviation Hand Tools..... N070-N075
Hi-Lok ® Tools.....N082
Jo-Bolt Tools.....N082
Mastic Removal Tools..... N118-N120
Mastic Removal Tools.... N118-N120, 424-425, 705
Military Aviation Tool Sets..... N054
Nyroc® Mastic Removal Tools N118-N119
Oil Can Opener..... 425
Pliers..... N072
Ratchets, FOD 105, 141, 186
Ratchets,Hi-Lok ..N072,105,142, 427
Rivet Shavers, ATI N109
Rivet Shavers, Snap-on N115
Safety Wiring 423-424
Service Tools. 113, 312, 315, 425-427
Sioux Aviation Air Tools..... N115
Skin Clamp Runner N115
Snap-on Aviation Air Tools N114
Snips..... 698
Socket Wrench 426
Sockets N073, 118, 152, 194, 216, 223
Specialty Hand Tools N072
Specialty Tools . N072, 154-155, 195, 424-427
Speeder, Deep Throw..... N072
Spline Sockets N073
Stainless Steel Tools..... N081
Tire Gauges..... N116
Tire Service Tools..... N116
Torq-Set Bits N080, N082
Torque Wrenches, Aluminum..... N074-N075
Traffic Batons..... N116
WERA & Zephyr Hand Tools N080-N082
Wire Twister N072
Aviation/Aircraft Tool Sets N054-N067
All-Purpose Mechanic's Set.... N059
Avianics Tool Set N060
Basic Flight Line Tool Set..... N058
Basic Maintenance Tool Set.... N057
Basic Mechanic's Set N058
Basic Sheet Metal Set N060
Engine Overhaul Set N060
Helicopter BDAR Set N056
Intermediate Flight Line Tool Set N058
Master Flight Line Tool Set N058
Master Mechanical Add-On Set N059
Overhaul Set N059
Aviation Drills..... N114-N115
AVR Testers.....610–611
Awl 328–329
Axle
Nut Socket 584–585, 596
Puller..... 392–393, 594–595

B

Back Supports 740
Bag
Collapsible..... 71, 506
Tote..... 71, 506
Bahco N181-N193
Adjustable Wrenches, Combination / Pipe N186
Adjustable Wrenches, Insulated N183
Auger Bits..... N191
Bolt Cutter N187
Cabinet Scrapers N192
Cable Cutters N187
Chisels N192
Holesaws & Holesaw Sets N188-N189
Insulated Bolt Cutter..... N183
Insulated Cable Cutters..... N183
Insulated Pliers N182-N183
Insulated Screwdrivers..... N181
Knives N193
Laplander Saw N193
Pliers, ergo® Cutting..... N186
Reciprocating Saw Blades & Sets ... N190-N191
Screwdrivers, XHD N184-N185
Screwdriver, Insulated N181
Screwdriver, Ratcheting Insulated .. N181
Screwdriver, Sets N181, N184
Spade Bits N191

Wood Chisels N192
Balancing, Wheel..... 569–571
Ball Bearing Drawer Slides..... 97
Ball Hex
Bit..... 320
Bit Socket 119–120, 157–159, 196
Wrench 266–267, 269–270
Ball Joint
Pickle Fork 590
Press 589
Press, Adaptors..... 589
Separators..... 590
Sockets 590
Ball Peen Hammer..... 354, 356
Band Dollies, Oil Container..... 652
Banners 619, 746–747, 749, 751, 754, 756, 757
Barring Socket, Engine..... 662
Bar-Type Pullers.....400, 403–405
Bash® Hammers..... N179-N180
Battery
Adaptor 517
Booster Cable.....613
Booster Packs 612–613
Cable Clamp Puller 614
Carrier 615
Charger..... 459, 462, 524, 530, 607–609
Charger Cover..... 607
Charger, Diagnostics 752
Charger, Mobile..... 459, 462
Clamp Puller 614
Diagnostics.....752–754, 756, 770–771, 774
D-TAC™.....610–611
Fillers 615
Hydrometer, Thermometer 615
Lift, Hybrid..... 605
Lithium 459, 461–462
Maintainers 609
MicroVAT™.....610–611
MODIS™ Ultra 756
Ni-Cad 459, 461–462
Packs, Diagnostic Tools....752–754, 756, 771, 774
Pliers.....614
Pocket iQ™ 771
Power Inverters 609, 612
Pro-Link® iQ™ 774
Pro-Link® Ultra 770
Remote Solenoid Switch 614
Service / Car Start Equipment. N271
Service Kit 614
SOLUS™ Edge 754
SOLUS Ultra® 754
System Tester..... 607–611
Terminal Cleaners.....615
Terminal Wrench.....614–615
Testers.....610–611
Tools 605, 607–615
VERDICT® 753
VERUS®.....752
Bead Breakers, Tire 572–573, 587
Bearing
Driver Sets 668–669
Packers.....651
Press 600
Race Drivers, Removers.... 668–669
Belt Sanders.....484
Belt Tensioning Tools 412, 658–659
Bench
Grinder Accessory 740
Work.....717
Bendable Light 643
Bending Tools..... 368
Bit Sockets
Ball Hex 119–120, 157–159, 196
Clutch..... 121, 160
Double Hex 158
Flat Tip.....120, 133–134, 160, 198
Hex, 1/4" Drive 119–120, 132–135
Hex, 3/8" Drive... 157–159, 168, 179, 181
Hex, 1/2" Drive 196, 207, 211–212
Hex, 3/4" Drive.....216–217
Hex, 1" Drive..... 224
Holder 112–113, 315–316, 320–323, 325, 347
Metric Hex.... 119, 132, 134–135, 157, 168, 179, 181, 196, 211–212, 216
Mortorq® 120, 160
Phillips® 121, 133–134, 160, 198
Polydrive® Head Bolt.....198
Pozidriv®..... 160, 180
Screwdriver..... 120–121, 133–134, 160, 198
Set, Williams.....N176
Special Purpose, Application... 120, 156, 160, 198
Stubby, 1/4" Drive 117, 119–120, 131–134
Stubby, 3/8" Drive..... 157–158
Stubby, 1/2" Drive 197
TORX® Tamper-Resistant ... 118–119, 131, 134, 156, 179–180, 211–212
TORX®, TORX Plus® 117–119, 123, 131, 135, 155–156, 168, 179, 181, 195, 206, 211–212, 216
Triple Square..... 133, 159, 180, 197
Universal 117, 119
Bits
Auger Bits, Bahco N191
Drill 490–496
Drill, Left Hand 493
Holster 460
Set, Power 321–322
Set, Quick Change 460, 488
Blade
Air Saw 502–503
Demolition..... 503
General Purpose..... 503
Hacksaw 359
Handsaw..... 359
Holder 425
Interchangeable Screwdriver..... 311
Knife 360–362
Metal Cutting 320, 359
NYROC® N118, 424–425
Reciprocating.....502–503
Reversible Screwdriver..... 311
Sharpener, Pneumatic 425
Sharpening..... 362
Utility Knife..... 360–362
Wood Cutting 359, 503
Blast
Cabinets 712–713
Gun 713–714
Blast Systems
Abrasives.....714
Accessories.....714
Cabinet-Type Abrasive.....712–713
Helmet, Hood.....714
Portable Pressure 711
Vacuum 713
Blind Hole Bearing Pullers ... 400, 406
Blind Rivet Kit..... 700
Blow Gun
Non-vented 504
Vented..... 505
Body
Bumper Cover Painting Stand ... 705
Dent Puller..... 452, 566–567, 696
Dollies..... 698–699
Door Tools..... 700–702
Files 699
Guard 38, 40, 78
Hammers 697–698
Jack Sets.....696
Panel Alignment Bar 696
Pull Rods 702
Repair.....566–567, 696–707
Rivet Kits 699–700
Sanding Blocks, Pads 705
Shears, Snips.....698
Spoon.....698–699
Spot Weld Cutter 707
Suction Cups..... 702
Tools 566–567, 696–707
Window Tools.....704–705
Bolt
Covers, Caster 98
Cutter 343–344, 346
Bolt Cutters, Bahco.....N187
Extractor..... 383–386

Insulated Bolt Cutter, Bahco ... N183
Socket 656, 662
Thread Gauges 381–382, 681
Bolt Cutters, Bahco N183, N187
Bolt-Grip Pullers 393
Bonnet Cleaning Tool 496
Booster
Cables, Clamps 613
Packs.....612–613
Boot Banding Tool..... 596
Boot, Air Tool.....488
Bore Gages, Dial, Starrett N197
Borescopes, Digital Inspection Kit.....
N117
Borescopes, Video N117, 528-530
Bottle Jacks 602
Bottoming Tap Sets.....381
Box
Aviation/"Dog Box" 63
End Torque Wrench 287–289
Metal Storage..... 70
Plastic Storage 68–69
Wrench Heads, Interchangeable
Torque 287–289
Wrench, Combination 234–238,
241–249
Wrench, Heavy Duty, Striking,
Slugging 263–264
Wrench, High Performance,
Spline..... 238, 249, 251–253
Wrench, Offset 236–237, 240,
249–253, 264
Wrench, Ratcheting ..234–241, 287,
615, 628, 658, 661, 703, 707
Wrench, Specialty.... 253–254, 536,
615, 628, 658, 661, 703, 707
Brake
Adjusting Tools 691
Bleeder Kits 542, 686–688
Bleeder Wrenches 694
Caliper Press..... 692–693
Cylinder Hones..... 695
Drum Gauge..... 690
General Service Sets..... 690
Lathes and Accessories..... 687
Parking Brake Tools 695
Pedal Jack 695
Pump Kits 542
Resetting Gauge..... 695
Service Tools..... 689–695
Slack Adjusters 419, 691
Socket 694
Software.....769, 772–773
Spring Tools.....689, 693
Truck 693
Brake Bleeder Kits
Bleeder Adaptors.....688
Master Cylinder Pressure Cap ... 688
Non-Diaphragm Type Brake
Bleeder..... 688
Vacuum Type 542, 686–687
Brake Lathes Accessories
Carbide Insert Bit Kits 687
Silencers 687
Brass Hammers 355–356
Brass Pin Punches, Starrett.....N200
Breaker Bar
1/4" Drive 106, 127
3/8" Drive 142, 178
1/2" Drive..... 187–188, 210
1" Drive 223
Nonconductive 348
British Standard Wrenches 248
Bronze Punches..... 352
Brush
Air 710
Battery 615
Battery Terminal 614–615
Diesel Injector 408, 411, 413
Distributor Cleaning..... 551
Electrical..... 523
Fingernail 737
Injector.....408, 411, 413
Paint Gun Cleaning 711
Parts Cleaning..... 724
Specialty 738
Taillight Socket..... 523
Valve Guide..... 663
Wire 551, 615, 738
Budd Wheel Tools 587
Buffing Pads..... 736
Build-a-Bay Modular Storage .....
N289-N290
Bulk Tool Storage N031
Bumper Cover Paint Stand 705
Burr, Grinding..... 499
Bushing
Cutter 353
Driver Sets 668–669
Inserter, Remover Set 667
Puller.....392–393
Tools 500, 600, 667–669
Buckets, TOOLS@HEIGHT N219
Build-a-Bay Modular Storage .....
N289-N290
Butane
Fuel Cans 561
Soldering..... 558–559
Soldering Torch 561
Butcher Block Tops..... 72

C

Cabinet
End.....20, 32–34, 48, 55
Flammables 711
Overhead.....20, 32
Prybar 93–94, 332
Roll, Classic Series 44–46
Roll, EPIQ Series..... 10–17
Roll, Heritage Series 50–52
Roll, Masters Series..... 24–29
Wall..... 69
Wheel Weight..... 571
Cabinet Scrapers, Bahco.....N192
Cable
Adaptor 759
Booster.....613
Clamp Pliers, Puller 614
Cutter 335, 344, 429
Cutter, Hydraulic 429
Cutters, Bahco.....N187
Cutters, Bahco Insulated N183
Data ... 744, 746–747, 749, 751, 754,
756, 758, 770–771, 774
Extension..... 754, 756, 758
Cable Cutters, Bahco N183, N187
Calibration Wheels, Arms 299
Calibrator, Torque N154, 295-299
Caliper
Dial 676
Electronic Digital 676
US, Metric Dial Type..... 676
Vernier 676
Caliper & Micrometer Tool Sets, ...
Starrett..... N194
Calipers, Starrett N195
Cam Belt Wrenches 661
Camber Adjusting Tools.....591
Camshaft
Bearing Remover, Inserter..... 663
Belt Tool 661
Holding Tool..... 654
Pulley Tool 653
Seal Installer.....598, 661, 663
Seal Puller 661–662
Cannon Plug Pliers..... 344
Cape Chisel 351–352

Car Starting Units 607–608, 609,
612–613
Carbide Burrs 499
Carbon Monoxide Analyzer 526
Carburetor
Adjusting Tools 549
Double "D" Tools..... 549
Idle Adjusting Tools 549
Screwdriver..... 549
Tools 549
Carts..... 57–60, 64–66, 564
Caster-Camber Tools 591
Casters..... 98
C-Clamp
High Visibility.....565

Locking....565
Medium Duty....716
Pliers....565
Valve Lifters....664
Welding....564
Center Gages, Starrett....N200
Center Punches....353
Chain
Saw Files....364
Wrench....274
Chain Wrenches, TOOLS@HEIGHT....N237
Charger
Battery....607–609, 751–754
Cordless Tools..459, 461–462, 524, 530
Diagnostics....751–754
Pocket iQ™....771
Pro-Link® iQ™....774
Pro-Link® Ultra....770
SOLUS™ Edge....754
SOLUS Ultra®....754
VERDICT®....753
VERUS®....752
VERUS® PRO....751
Charging
Manifolds, A/C....624
Service Center, A/C....617–618
Starting, Tester, Battery...607–609
System Analyzers, Battery....607–609
Chasers
Circuit....523
Thread....375–376
Chests
Mobile....62–63
Road....61–62
Top....18, 30–31, 47, 52–54
Chipping Hammer....564
Chisel
Punch Holder, and....351
Punch Set, and....351–353
Punch, Air Hammer, and....500–502
Demolition....331
Gauge....351
Soft Grip....353
Wood, Bahco....N192
Chisel Holder, TOOLS@HEIGHT..N243
Chisels, Bahco Wood....N192
Chuck
Air....422, 578–579
Air Drill....489
Air Hammer....475, 501
Impact Wrench, Quick Change....447–449, 453, 456
Keyless....474
Quick Change....447–449, 453, 456
Tire....422, 578–579
Circuit
Chaser....523
Test Lights....518–523, 628
Tester....518–523, 628
Testing Adaptor....515, 517
Clamping Pliers....565
Clamps & V-Blocks, Starrett....N198
Classic Series
Accessories, “Add-ons”....47–48
End Cabinet....48
Locker....48
Reference Chart....6, 44
Roll Cab....44–46
Top Chest....47
WorkStation Riser....48
Claw Hammer....355
Cleaner
Auto....736
Diagnostic....95
Diesel....416, 644
Dirt, Stain....727
Engine....644
File....364
Fuel....543, 644
Hand....736–737
Parts....722–725
Plastics....95
Pressure....725–726
Supplies....95, 724, 736–737
Tool Storage....95
Click-Type Torque Wrenches
QC Series....286
QD Series....279–280, 286
TQ Series....280–281
Clip, Alligator....514–517
Close Quarter Bars....332
Clutch
Aligner Sets....600
Bit Socket....121, 160
Driver....121, 160
Hex Shank Bits....324
Remover....626
Service Tool Sets, A/C....626
Tools....600, 626
Wrench....409, 411, 415
Code Readers, OBD-II...744, 746–749, 752, 765, 771
Coil-on-Plug Probe....534
Coil Spring Compressor....593
Collision Repair....566–567, 696–698
Combination
Lock....95
Pliers....337, 345
Square & Protractor Sets, Starrett..N201
Storage Units....10–55
Wrench....234–237, 241–249
Wrench, Flex Head....237, 248
Wrench, Open End, Ratcheting Box....234–237
Wrench, T and L-Shape....266–267
Combination Wrenches, TOOLS@HEIGHT....N232-N233
Combustible Gas Detectors....526
Come-Along Lifting Tool....605
Compact Meters....511–512
Comparator, Torque....300
Composite Tools, Nonconductive....347–349
Compound Leverage
Cutters....335
Pliers....335, 337
Snips....698
Compression
Adaptor....407–408, 412, 540, 653
Gauge Set....538–539
Gauge, Diesel....539
Gauge, Motorcycle....422, 538
Glow Plug Adaptors....412, 540
Computer
Memory Savers....536
Torque Testers....294, 296–297
Connector
A/C....627
Extension....109, 144
Pliers....343–344, 426
Swivel....505
Constant Velocity Tools....596–597
Contact Point Set, Starrett....N196
Continuity Tester....518–523, 628
Coolant
System Tools....630–636
Testers....631–634
Corbin Hose Clamp Pliers....635
Cordless
Adhesive Gun....452
Batteries, Snap-on®....459
Chargers, Snap-on®....459
Cut-Off Tool....452
Dent Pulling Kit....452
Drill, 14.4V....445, 455
Drill, 18V....445, 450
Driver....453, 456
Lighting....457, 638–639
Grease Gun....451
Grinder....446, 452
Impact Wrench, 9.6V....456
Impact Wrench, 14.4V....453
Impact Wrench, 18V....447–449
International Product....461–462
Kits, 14.4V....455
Memory Saver/Power Inverter..458

Power Bit Kits..... 488–489
Power Inverter/Memory Saver .. 458
Ratchet..... 454
Reciprocating Saw.....451, 454
Reference Chart..... 445–446
Screwdriver..... 453, 456
Screwdriver, Accessories 460
Soldering..... 558–559
Tool Kits..... 450
USB Power Units..... 458
Utility Lights 641
Work Light 457
Cotter Pin Puller.....588, 636
Coupler
Air Line 506
Quick Change.....321–323, 488
Removal Tool..... 634
Spring Lock.....546, 628
Cover
A/C Service Center.....619
Battery Charger 607–608
Fender 670
Motorcycle Gas Tank..... 421, 670
Seat, Automotive..... 670
Smoke Machine..... 524
Tool Storage Unit, Combinations 74–75
Tool Storage Unit, Road Chests.. 61, 75
Tool Storage Unit, Roll Carts 75
Tool Storage Unit, TUV 37–40
Crankshaft Pulley Tool..... 390, 408
Creepers
Accessories..... 673
Hanger 94, 673
Heavy Duty..... 672
Seat 673
Specialty 671–672
Standard.....671
Crimping Tools..... 343–344, 625
Cross Peen Hammers 356, 697
Crowfoot Wrench
1/4" Drive 258
3/8" Drive..... 258–261
1/2" Drive..... 261–262
Holder 261
Ratcheting 261
Crud Removal Tool 486
Crud Thug®..... 486
Cummins®, Diesel Tools for
Bit Socket, TORX® 119, 156
Compression..... 540
Diagnostics..... 770, 774
Feeler Gauges 679
Service Tools..... 218–220, 390, 407–409, 414, 416, 417–418, 648
Tool Sets..... 407–409, 645
Cut Off
Tool, Air 478–479
Wheels 452, 478–479, 498
Cutter
Air 465, 478–481
Bolt 343–344, 346
Bushing 353
Bushing, Air Hammer..... 500
Cable.....335, 344, 429
Cable, Hydraulic 429
Chain Pipe 367, 591
Diagonal.....334–335, 345–346
Electronic Service 342
High Leverage 335, 588
Miniature.....345–346
Multi-Purpose 360
Pliers.....334–337, 342, 345–346
Pruner, Hand..... 360
Ratcheting 368
Set 334, 345–346
Sheet Metal 698
Special Purpose, Application.....335
Tail Pipe.....367, 591
Tube 368
Wheels 452, 478–479, 498
Wire 343–344, 423
Cylinder
Bore Gauges 665
Compression Gauges.....538–539
Head Tools..... 656, 663–665
Hones..... 695
Leakage Tester 541
Ridge Reamers 665
Service Tools..... 656, 663–665

D

Dana®, Axle Nut Sockets for..584–585
Dead Blow
Hammers 354, 356, 666
Hammers, Piston 354, 666
De-Burring Tools 496
Decal, Tool Storage 84
Decimal Conversion Chart..... 680, G5
Deep Well Thread Chasers 376
Degreasers..... 724
Dent Pullers
Body..... 452, 566–567, 696
Stud Gun 566
Depth Gages, Starrett..... N196
Detail Gun 708
Detailing
Buffing, Cleaning..... 95, 484, 496, 735–736
Detector
Gas..... 524–525
Leak 620–622, 631, 656, 705
Detroit Diesel®, for
Hand Tools..... 169, 197, 218, 220, 410–412, 417–418, 635, 658
Impact Sockets.....169, 218, 220, 417–418
iQ™ Software, Diagnostics..... 772
Diagnostic Equipment
Cleaning Supplies 95
Data Bus Fault Finder 521
Docking Station.....749, 751, 753
ETHOS®, Accessories 758, 763
ETHOS®, Storage 763
ETHOS®+, Accessories744, 755, 763
ETHOS®+, Scan Tool..... 744, 750
ETHOS®+, Storage 763
Foam Organizers 745, 747, 749, 751, 756, 763, 770, 774
Keys, Personality.....775
MICROSCAN® III, Accessories ... 765
MicroVAT™, D-TAC™, Accessories ... 610–611
MODIS™, Accessories..... 758–761
MODIS™ Ultra, Accessories.....747, 756, 758–761, 763
MODIS™ Ultra, Scan Tool 747, 750
MODIS™ Ultra, Storage..... 763
OBD-II Scan Tools 744, 746–749, 765–766, 771
PASS THRU PRO II 764
Personality Keys.....775
Pocket iQ™ 771
Pocket iQ™, Accessories 771
Pocket iQ™, Storage 771
Pro-Link® iQ™, Accessories 774
Pro-Link® iQ™, Storage 774
Pro-Link® Ultra, Accessories..... 769–770
Pro-Link® Ultra, Scan Tool..767–768
Pro-Link® Ultra, Storage 770
Reference Chart..... 750
Screen Guards, Protectors, Skins ... 754–756
Software 764, 769, 772–773
SOLUS™, Accessories..... 758, 763
SOLUS™ Edge, Accessories..... 746, 754, 758, 763
SOLUS™ Edge, Scan Tool ... 746, 750
SOLUS™ Edge, Storage..... 763
SOLUS PRO®, Accessories 758, 763
SOLUS PRO®, Storage 763
SOLUS Ultra®, Accessories 754, 758, 763
SOLUS Ultra®, Storage 763
Storage..... 763, 770–771, 774
Trailer Testers, IPA Diagnostic. N270

Training, Service Banners..... 619, 746–747, 749, 751, 754, 756, 757
Vantage PRO™, Accessories..... 759–761, 763
Vantage PRO™, Storage..... 763
VANTAGE™ Ultra, Accessories... 745, 759–761, 763
VANTAGE™ Ultra, Scan Tool 745, 750
VANTAGE™ Ultra, Storage..... 763
VERDICT®, Accessories..... 753, 758–761, 763
VERDICT®, Scan Tool 748, 750
VERDICT®, Storage..... 763
VERUS®, Accessories 752, 758–761
VERUS® PRO, Accessories 749, 751, 759–761, 763
VERUS® PRO, Scan Tool.....749–750
VERUS® PRO, Storage 763
Diagonal Cutter.....334–335, 345–346
Dial Calipers, Starrett.....N195
Dial Gauges, Diesel..... 407
Dial Indicators, Starrett N196-N197
Dial Test Indicators..... 677
Diamond Point Chisels 351
Diamond Tip
Bits 320, 325
Screwdrivers 306
Die
Grinders, Air 465, 476–478
Sets.....377–379
Setter Bars..... 332
Dies and Taps
Self Aligning 380
Thread Restoring 374–376
Threading 377–379

Diesel
Audi®..... 414–416
Automotive 414–415
BMW®.....414, 416
Caterpillar®..... 218, 220, 412, 417–418
Cleaning Tools.....416
Compression Adaptors....407–408, 412, 539–540
Compression Gauge..... 539
Cummins®, for....119, 156, 218–220, 390, 407–409, 414, 416–418
Detroit®, for 169, 197, 218, 220, 410–412, 417–418
Duramax®, for 200, 414–416
Engine Detergent.....416
Ford®, Navistar®, for 409, 412–414, 418
Fuel Service 407, 416, 644
Injector Tools 119, 158, 407–411, 414–416, 418, 422
International®, for 203, 220, 411, 417–418, 540, 586, 590, 632, 635, 693, 769, 772–773
Isuzu®, for..... 416, 769, 773
Mack®, for.....418
Mercedes®, for ... 415–416, 418–419
Navistar®, for 409, 412–414, 418, 769, 772–773
Pinion Nut Sockets 596
Pulse Adaptor 413, 534
Pump Adjusting Tools 119, 156, 409
Service Tools.....405–416
Software, Diagnostics..... 769, 772–773
Timing Gauge..... 407
Timing Meter..... 413, 534
Tools 405–416
Turbo Tools, for 413
Volkswagen®, for.....414
Volvo®, for 117, 154, 156, 414, 418
Differential Side Bearing Puller 390
Differential Wrench 595–596
Digital
Aviation Inspection Kit..... N117
Battery Charger 607–608
Battery System Tester 610
Booster Packs 612
Borescope N117, 528–530
Caliper..... 676
Circuit Tester..... 519–520
Drum Gauge..... 690
Gas Analyzer 526–527, 762
Imager, Dual View.....528–530
Inspection Kit..... N117
Leak Detector 620
Manifold Gauge..... 624
Meter..... 511–512, 744–750, 765, 767–768, 771
Meters, TPI.....N272-N274
Micrometer 674
Multimeter..... 511–512, 610
Multimeter, Accessories..... 513–514
Multimeter, Test Leads..... 514–517
Rotor Gauge 690
Smoke Machine..... 524–525
Tachometer..... 407, 534–535
Test Equipment, TPI N272-N274
Test Light..... 519–520
Thermometer 627
Timing Light.....535
Tire Pressure Gauge..... 576
Videoscope.....528–529
Volt-Ohm Meter.....748–749
Digital Inspection Kits (Borescope).... N117
Dirt, Stain Extractor..... 727
Disc Brake
Caliper..... 690
Gauges 677, 690
Lathe, Accessories..... 687
Micrometers..... 690
Runout Gauges..... 677
Tools 692–693
Disconnect Tools
Cooling Systems..... 628, 630
Driveline 598, 600
Electrical..... 536–537
Fuel Systems.....544–547
Discs, Grinding 452, 480, 496–498
Distributor Tools 550–551
Dividers, Drawer 91–93
Dividers, Starret.....N200
Dog Boxes N068
Dollies
Body..... 698–699
Hydraulic Wheel 603
Door Tools 700–703
Double End
Drill Bits..... 494
Pick 329
Wrench 257
Wrenches, TOOLS@HEIGHT..... N233-N235
Double Hex
Bit Socket 158, 196
Driver 158, 196
Double Square
Bit 324
Socket, 3/8" Drive 153
Socket, 1/2" Drive..... 194, 206
Socket, 1" Drive 227
Double “D” Tools, Carburetor..... 549
Dowel Pin Puller..... 388
Drag Link Sockets
Socket, 3/8" Drive 153
Socket, 1/2" Drive.....194
Socket, 3/4" Drive 216
Drain
Plug Sockets 599, 630
Tables, Transmission 652
Valve, Regulators..... 720
Drawer
Ball Bearing Slides 97
Detent Kits..... 97
Divider, Insert 91–93
EPIQ Series Sections.....19
Front..... 78–79, 81
Guard 76–79, 81
Heritage Series Sections 54
Latches/Slides..... 97
Liner.....88
Parts Trays 93
Storage, Cabinet 68–70
Drift Pin Punches 500–502

Drill
Accessories..... 489–496
Air N127-N129, 464, 473–474
Angle.....474, 494
Aviation Air N114–N115
Bit, 90° Angle..... 494
Bit, Aircraft Length 494
Bit, Double Ended..... 494
Bit, Reduced Shank 494
Bit, Set 490–495
Bit, Set, Extractors..... 385
Bit, Set, Left Hand 493
Bit, Set, Specialized 493–495
Bit, Set, Step..... 495
Bit, Set, Tap and Die 377
Boot 488
Chuck 489
Cordless, 14.4V 445, 455
Cordless, 18V 445, 450
Cordless, Kits, 14.4V.....455
Gages, Starrett..... N198
Guides.....383, 385
Hammer..... 450
Index..... 490–493
Micro, Air..... 474
Micro, Utility 496
Pilot 495
Reversible.....473–474
Right Angle 474, 494
Spotweld 473
Step, Bit 495
Drill Gages, Starrett..... N198
Drive Line Tools.....595–600
Drive Pin Punches, Starrett N200
Drive Shaft
Magnetic Angle Locator.... 600, 678
Universal Joint Tools 600
Driver
Adjusting Head..... 549
Bushing..... 667–669
Clutch..... 121, 160
Double Hex 158, 196
Flexible, 1/4" Drive 107
Flexible, Carburetor 549
Handled, 1/4" Drive 106–107, 128
Handled, 3/8" Drive.....143, 176
Hex, Bit.....132–133
Hex, Front Wheel Drive Service 597
Impact..... 161, 198
Limiting 284–285
Nut..... 107, 311, 318, 323, 349
Nut, Trim..... 702
Ratcheting 107
Seal.....669
Set, Bushing and Seal.....669
Set, Impact 161, 198
Socket 120, 155–156, 458–159, 196, 198, 408, 420
Square Drive 106–107, 128, 143, 176
Torque 285
Tray 85–87
Triple Square, Bit Sockets 133, 159,180, 197
Triple Square, Bits 133, 180
Drop Cords 643
Drum Plug Socket 205, 652
D-TAC™ Battery System
Diagnostic Tester.....610
Tester Accessories 611
Dual
Action Sander 483
Dual 80® Ratchets 103–105, 138–142, 185–186,
Face Hammer 355
Duck Bill Pliers..... 336
Dust Cap Tool..... 588, 591
Dzus®, Screwdriver for..... 311

E

Ear Protection 729, 731
Edge Finders, Starrett..... N199
Electric Tools
Engraver 460
Impact Wrench 460
Polishers 460
Electronic
Basic Electronic Tool Set, Starrett ... N194
Battery Tester.....610–611
Stethoscopes..... 530–531
Terminal Tools.....537
Torque Meter..... 295
Torque Tester N154, 294–299
Torque Wrenches..... 293
Electronic Service
Cutter 342
Pliers.....341
Screwdriver, Miniature, Mini-Tip..... 308–309
Screwdriver, Nonconductive, Composite 347
Soldering..... 558–561
Tools, E-Series Pliers/Cutters 341–342
Tools, Nonconductive, Composite... 347–349
Tweezers.....561
Emergency Brake Tools..... 695
End Cabinet
Classic Series.....48
EPIQ Series. 20
Heritage Series..... 55
Masters Series 32–34
End Cutters..... 345
End Effector Sockets, Wellhead ...N159
Enerpac Hydraulic Tools N143-N150
Engine
Alternator Tools..... 657
Belt Tensioning 658–659
Brake Tools, for Jacobs®.....408
Calibration and Setup Kit 653
Cam Tools ..598, 653–654, 661, 663
Cleaners 644
Cooling System 630–636
Cylinder Head..... 656, 663–665
Cylinder Service Tools..... 665
Drain Plugs 645, 655
Fuel System.....542–551
Hanger 605
Harmonic Balancer 660
Hood Prop.....661
Lift Plate 605
Oil Pressure, Oil Pump 655
Piston Service Tools..... 665–666
Power Steering, Alternator, Water Pump..... 657
Service Tools..... 653–666
Sling 605
Socket 408, 427
Specialty Tools 661
Thermal Vacuum Switch 662
Timing 422, 535, 653–654,
Turning Tool 407, 409
Valve Service Tools 662–665
Engineer Style Hammers 356
Engraver.....460, 506
Engraving Pen, Tip 460, 506
EPIQ Series
Accessories, “Add-ons”.....18–20
Drawer Sections 19
End Cabinet 19
Locker 20
Overhead Cabinet..... 20
PowerBank™ Unit..... 12–14
Reference Chart..... 6, 10–11
Roll Cab 10–17
Roll Cart..... 57
Top Chest..... 18
WorkCenter 20
Etching, Engraving Tools.....460, 506
ETHOS®..... 758, 763
ETHOS®+.....744, 750, 755, 763
EVAP 524–525
Exhaust
Pipe Cutters 367, 591
Probe.....527
Tailpipe Stretcher 367
Tools, Air Hammer Bits.....500–502
Tools, Cutters, Expanders, Specialty 367, 591
Expander..... 367

Extension
1/4" Drive 108–109, 121, 128
3/8" Drive .. 143–144, 154, 162, 168, 176–177
3/8" Drive, Nonconductive 348
1/2" Drive.... 189–190, 199, 205, 210
1/2" Drive, Nonconductive..... 348
3/4" Drive 214, 217
1" Drive 223–224
1 1/2" Drive 228
Adaptor, 1/4" Drive 109, 123, 128
Adaptor, 3/8" Drive .. 109, 144–145, 162, 168, 177
Adaptor, 1/2" Drive ... 109, 144, 190, 199, 205
Adaptor, 3/4" Drive 215, 217
Adaptor, 1" Drive 223–224
Adaptor, 1 1/2–2 1/2" Drive 228
Adaptor, Spline to Square 228
Connectors, 1/4" Drive 109
Connectors, 3/8" Drive 144
Cords..... 643
Data Cable 758–759
Flexible, 1/4" Drive 108, 128
Flexible, 3/8" Drive.....177
Impact, 1/4" Drive 121
Impact, 3/8" Drive 162
Impact, 1/2" Drive.....199
Impact, 3/4" Drive 217
Impact, 1" Drive 224
Impact, 1 1/2" Drive 228
Knurled, 1/4" Drive 108, 121, 128
Knurled, 3/8" Drive... 143–144, 162, 176
Knurled, 1/2" Drive ... 189–190, 199, 210
Locking, 1/4" Drive 108, 121, 128
Locking, 3/8" Drive... 143–144, 162, 168, 177
Locking, 1/2" Drive ... 189–190, 199, 210
Nonconductive 348
Power, 3/8" Drive 168
Power, 1/2" Drive..... 205
Probe.....514
Quick Release 143, 189
Repair Kit.....143, 189
Set, 1/4" Drive..... 108, 121, 128
Set, 3/8" Drive 143–144, 162, 177
Set, 1/2" Drive.... 189–190, 199, 210
Sockets, Flexible 154, 371
Sockets, Swivel Ball.....154
Swivel.....154, 162
Wobble, Wobble Plus, 1/4" Dr. 108
Wobble, Wobble Plus, 3/8" Dr. ..144
Wobble, Wobble Plus, 1/2" Dr. ...189

Extra-Long Screwdrivers
Flat.....303, 305
Phillips® 303, 306
Set 303
Extractor
Fastener, Power..... 384
Pipe Plug 386
Porcelain 370
Repair Kit, Porcelain 370
Set 383–386
Spark Plug 370
Tools 383–386

Eye Protection
Face Protectors.....721
Goggles, Glasses..... 621, 628, 731
Shield Replacement..... 729
Welding, Helmets 562–563
Welding, Lenses 564

F

Face Protector.....721
Fan
Clutch Wrench 634–635
Clutch Wrench, Diesel 409, 411, 415
Shop 727
Wrench 409, 411, 415

Feeler Gauges
Bent and Step Blades 407, 411, 679–681
Blades and Holder 681
Diesel.....407, 411, 679
General Use 679
Ignition..... 679
Non-Magnetic 680
Specialty 680
Fender Covers..... 670
File
Body.....699
Comfort Handle 363
Flexible Curved Tooth..... 699
General..... 364
Handles 364, 699
Instinct® 363
Miniature 363
Nib 699
Spark Plug 371
Swiss Needle 364
Thread Restorer.....375
TOOLS@HEIGHT N242
Fillers
Battery 615
Oil..... 648–649

Filter
A/C.....619
Air Processing 720
Air, Paint Spray 709
Air, VERUS® Diagnostics.....752
Blast System 714
Crusher..... 645
Dryer 619
Fuel 544
Gas Analyzer 762
Parts Washer..... 722
Pneumatic Tool.....301
Respirator.....731
Socket 412, 414, 645
Vacuum 727
VERUS®.....752
Wrench 425, 647
Fingers, Mechanical 683
Fingertip Ratchets..... 104, 106, 127, 142, 176, 187
Fin Straightener, Cleaner..... 628
Firing Indicator, Spark Plug.....371
Flammables, Storage Cab N295, 711
Flank Drive®, Flank Drive® Plus
Nut Driver 349
Socket, 1/4" Drive..... 110–115, 122
Socket, 3/8" Drive 146–150, 163–166
Socket, 1/2" Drive.....191–194, 200–204
Socket, 3/4" Drive 215, 218–220
Socket, 1" Drive 225–227
Socket, 1 1/2" Drive 228–230
Socket, 2 1/2" Drive 231–232
Socket, Axle Nut 584–585, 596
Socket, Fuel Pressure Sensor .. 412, 544
Socket, High Performance..... 115
Socket, Spark Plug 371–373
Wrench, Adjustable 272
Wrench, Brake Bleeder 694
Wrench, Combination 234–235, 241–248
Wrench, Combination Ratcheting Box.....234–235
Wrench, Flare Nut 257
Wrench, Flare Nut, Crowfoot, 1/4" Drive 258
Wrench, Flare Nut, Crowfoot, 3/8" Drive 258–261
Wrench, Flare Nut, Crowfoot, 1/2" Drive 261–262
Wrench, Flex Head 248
Wrench, Heavy Duty..... 263–264
Wrench, High Performance.....238, 251–252
Wrench, Offset Box 249–252

Wrench, Oxygen Sensor 548
Wrench, Pan Plug 645
Wrench, Specialty Box 253–254
Flap Wheels and Discs..... 496–498
Flare Nut
Socket 153
Torque Wrench 291–292
Wrench 257–258, 260, 262, 291–292
Wrench, Flare Nut, Crowfoot, 1/4" Drive 258
Wrench, Flare Nut, Crowfoot, 3/8" Drive 260
Wrench, Flare Nut, Crowfoot, 1/2" Drive 262
Wrench, Fuel Line 409
Flaring Tools, Tubing 368–369
Flashlights
Cordless 457
High-Output LED..... 638
Holders..... 638–639
Non-Rechargeable 638–639
Penlight LED..... 638–639
Rechargeable 638–639
Rotating..... 639
TOOLS@HEIGHT N243-N250
UV Leak Detection 623
Flat Chisels..... 351
Flat Tip
Bit 120, 133–134, 160, 198
Screwdriver, Electronic Service 308–309
Screwdriver, Hard Handle..304–305
Screwdriver, Nonconductive 347
Screwdriver, Pocket, Spark Test 306
Screwdriver, Ratcheting 314–317
Screwdriver, Soft Handle..303, 305, 307–308
Screwdriver, Special Application 311–313
FLEET MAINTENANCE, INDUSTRIAL N251-N296
Battery Service / Car Start Equipment N271
Build-a-Bay Modular Storage N289-N290
CamSpray Pressure Washers .. N275
Challenger Lifts N254-N255
Columbus McKinnon Hoists & Lifts N278-N282
CoxReels Hose Reels..... N276-N277
Equipto Shelving, Cabinets, & Workbenches N291-N295
Flammable Liquid Storage Cabinets N295
IPA Diagnostic Trailer Testers.. N270
Jet Industrial Shop Tools N286-N288
John Bean Alignment Lifts N260
John Bean Collision Service Equipment N261
John Bean Mobile Deployable Column Lifts..... N258-N259
John Bean Tire Changers N266
John Bean Wheel Alignment Systems..... N262-N263
John Bean Wheel Balancers N264-N265
Military Diagnostic Scan Tool.. N267
Omega Vehicle Jacks..... N283-N285
Pro-Cut Rotor Matching Systems.....N256-N257
Shelving N291
ShopKey Pro N268-N269
Storage Cabinets.....N294
Tire Rack..... N295
TPI Digital Meters & Test Equipment N272-N274
Workbenches N292-N293
Flex Head
Ratchet, 1/4" Drive 103–105
Ratchet, 3/8" Drive..... 138–140
Ratchet, 1/2" Drive 185–186
Ratchet, Pass Thru.....182
Ratchet, Quick Release 104, 140, 186
Speeder..... 188
Torque Wrench 278, 280–281
Wrench, Combination 237, 248
Wrench, Ratcheting Box.....237, 241
Flexible
Carburetor Tools..... 549
Claws 683
Distributor Tools.....550–551
Drivers, 1/4" Drive 107, 551
Drivers, Carburetor Adjust. 549
Extensions, 1/4" Drive.....108
Extensions, 3/8" Drive 177
File Holder 699
Files 699
Fingers 683
Lights 83, 643
Neck MIG Torch 554
Pick-up Tools..... 683–684
Shank (Screwdriver)..... 315
Flight Line Roll Cabinets N069
Flip Socket
1/4" Drive 117
3/8" Drive..... 414, 645
1/2" Drive..... 581–582
Filter..... 414, 645
Lug Nut..... 581–582
Thinwall.....581
Floor Jacks.....601–602
Floor Mats 96
Fluid Maintenance
Fluid Evacuators 644
Fuel System Maintenance...542–551
Transfer Pumps 644
Flush Gun 628
Flywheel Tools
Locking Tool..... 415
Turning Tool 600
Foam, Diagnostic Storage 745, 747, 749, 751, 756, 763, 770, 774
Foam Tool Control Kits N030
FOD Detection, Aeroprobe N071
FOD Hand Tools.....N070-N071
FOD Ratchets
1/4" Drive N070, 105
3/8" Drive..... N070, 141
1/2" Drive.....N070, 186
Folding
Saw, Pruning..... 360
Scissors..... 358
Shelf 59, 94
Wrench Sets..... 268–269
Ford® Navistar®, Diesel for
Service Kits..... 407
Tools 409, 412–414, 418
Fork, Pickle..... 590
Four-Way Angle Head, Wrenches .. 256
Freeze Plug Tools 630
Front
End Tools 589–597
Wheel Drive Tools 596–597
Front Wheel Drive
Boot and Joint 596–597
Half Shaft Removal 597
Service Tools.....596–597
Fuel
Adaptor Sets 542–543
Filter Socket.....414
Filter Wrench 414, 544
Injection Gauge Holder 407
Injection Pressure Gauge 542
Injection System Cleaner... 416, 543
Injector Puller..... 409, 415
Injector Timing Gauges 407
Injector Tools 119, 156, 407–411, 413–418, 422, 425
Line Disconnect Tool.....546–547
Line Plug.....407, 409
Line Stopper 547
Pump Wrench.....409, 425
Service, Diesel .. 407, 409–416, 418
Socket, Pressure Sensor .. 412, 414, 417
Tank Ring Tool 420, 544
Tank Stand.....604
Tube Remover 409
Funnels 648–649
Fuse

Pliers 536
Pullers 536
Savers, Fuse Buddy™ 522
Tongs 536

G

Gappers, Spark Plug 680
Gas Analyzers 526–527
Gas Welders 558
Gasket Punches 353
Gauge
Air Pressure 541, 577
Belt Tensioning 630, 658
Brake Drum, Rotor 690
Chisel 351
Compression 538–540
Cooling System 630–631
Cylinder Bore 665
Cylinder Leakage 541
Depth, Starrett N196
Diesel Compression 539
Drill Bits, Wire 492
Feeler, Gap 407, 411, 679–681
Fuel Injection 542–543
Fuel Pressure 542–543
Height, Starrett N197
Holder 407
Hole 675
Hydraulic Pressure 401, 404
Injector Height 410
Magnetic Base Holders 678
Manifold 624
Pressure, Compression 538–540
Pressure, Cylinder 538
Pressure, Fuel 542–543
Pressure, Oil 541, 655
Pressure, Tire 576–578
Pressure, Vacuum 541–542, 686
Spark Plug 679–680
Test, Micrometer 675
Thread 381–382, 681
Timing 407
Tire Pressure 576–578
Torque Angle 284, 422
Transmission 541
Tread Depth 579
Gear Oil Pumps 652
Geared Head Multiplier 292–293
General Mechanics' Tool Kits N009
General Service Sets
1/8" Drive 124
1/4" Drive 124–126, 135–136
3/8" Drive 136, 170–175, 182–183
1/2" Drive 208–209, 212
3/4" Drive 221
Glasses, Goggles
Glasses, Safety 729–731
Goggles 629, 731
Leak Detection .. 524–525, 621–623
Gloves
Anti-Vibration 733
Blast, Abrasive 714
Carbon Knuckle 732–733
Cold Weather 732, 734
Cut Resistant 733, 735
Dispenser 735
Hi-Vis 733
Impact 733
Latex 735
Leather 558, 732, 734
Mechanic's 734
Nitrile 735
Gloves, Safety N250
SuperCuff® 732–733
Washable 732, 734
Welding 558
Work 734
Wrecker 733
Glow Plug Compression Adaptors 412, 540
GM®, TORX® Driver for 117–118, 155–156
Goggles/Glasses 524–525, 621–623, 629, 729–731
Governor Gap Tools 410–411
Graphing Meter 745, 747–749
Graphing Scanners 744, 746, 765, 767–768, 771
Grease
Bearing Packer 651
Control Valve 650, 652
Dispenser 502, 649–650
Dispensing Systems 652
Gun 446, 451, 502, 649
Gun, Cordless 446, 451
Gun, TOOLS@HEIGHT N243
Guns and Accessories 446, 451, 502, 649–650
Pumps 652
Service Tools 588–589, 591, 600, 648–653
Grinder
Abrasive Wheels 496–498
Accessories 498, 739–740
Air 476–478, 480
Burrs 499
Die 476–478
Die, Kits 477
Discs 480, 496–498
Tools 446, 452
Wheel 480, 496–498
Wheel Dresser 740
Groove Cleaners, Piston Ring 666
Gun
Adhesive 452
Air Solvent 724
Blast 713–714
Blow, Non-Vented 504
Blow, Vented 505
Flush 628
Grease 451, 502, 649
Heat 707
Injection 621–622
Oil Spray 651
Paint 708
Sandblasting 713–714
Soldering 560
Spool 554
Spray 708
Stud 566
Suction 651
Vibro 424

H

Hacksaw 358
Hacksaw, TOOLS@HEIGHT N242
Half Moon Box Wrenches 253
Hammers
Air 475
Air Accessories 475, 500–502
Ball Peen 354, 356
Bash® N179-N180
Body 697–698
Brass 355–356
Bronze Tip 355
Claw 355
Combination 355
Cross Peen 356, 697
Dead Blow 354, 356, 666
Dual Face 355
Engineer 356
Hand Drilling 356
Heavy Duty 356
Heavy Duty, Air 475
Interchangeable 355
Piston 354, 666
Plastic Tip 355
Rubber Mallet 355, 588
Set 354–356
Sledge N178-N180, 354, 356
Sledge, Hammer Striking Wrench 263–264
Slide 388, 392–393, 395, 398–400, 407, 409, 566–567, 595, 600, 696
Soft Face 355, 588
Tire 355, 571, 588
TOOLS@HEIGHT N239
Wheel Weight 571

Hand Cleaner....736–737
Hand File....363–364, 699
Hand Saw.... 358
Handles
1/4" Drive 106–107
3/8" Drive....143, 176
1/2" Drive.... 188
3/4" Drive....214
1" Drive 223
Air Drill 473–474, 489
Auxiliary 473, 489
File 364, 699
Screwdrivers 314
Tool Storage....82
Torqometer®.... 283
Hang-on
Creeper Rack....94
Diagnostic Storage Rack 94
Prybar Rack....93–94, 332
Trays 94
Hardwood Tops.... 72
Harmonic Balancer Tools 660
Head Bolt Tools..... 158–159, 196–197, 218, 220, 408, 417, 419, 545
Headlamp
Adjuster.... 707
Spring Tool 707
Wrench 707
Hearing Protection 729, 731
Heat Gun 707
Heated Leak Detectors.... 620
Heavy Duty
Cutter, Bolt 346
Cutter, Diagonal 335
Die Grinder 476
Gloves 732, 735
Hammer.... 356
Hammer, Air.... 475
Housing with Collet....388
Pliers.... 337
Polisher 485
Prybar 330–332
Puller.... 395–396, 399
Punch 353
Repl. Locks, Tool Storage 98
Scraper.... 365
Soldering.... 560
Truck Tools..... 417–419, 767–774
Wrench 263–265
Wrench, Impact 467
Height Gages, Starrett....N197
Helicopter Damage Assessment
Repair Kit (BDAR).... N056
Helmets, Welding....562–563
Heritage Series
Accessories, “Add-ons”.....52–55
Drawer Section.... 54
End Cabinet 55
Keyless Entry N032
Locker 55
Reference Chart.... 6, 50
Roll Cab 50–52
Top Chest....52–54
Hex
Adaptors, Hex-to-Square, Power..... 109, 117, 123, 145, 168, 321–323
Bit Socket, 1/4" Drive.....119–120, 132–135
Bit Socket, 3/8" Drive 157–159, 168, 179, 181
Bit Socket, 1/2" Drive..... 196, 207, 211–212
Bit Socket, 3/4" Drive 216–217
Bit Socket, 1" Drive 224
Driver 549, 597, 690
Drivers, Impact, 3/8" & 1/2" N154
Hex Drivers, Impact Rated N154
Holder 112–113, 315–316, 320–323, 325, 347
Key Sets.... 266–271
Low Profile Socket 599
Screwdriver....308
Shank, Power.... 123, 205
Wrench 266–271
High Leverage Pliers, Cutters 335, 337, 588
High Performance
Sockets 115
Wrenches..... 238, 251–252
High Range Seal Tools 599
Hi-Lok® Fastener Ratchets
1/4" Drive N072, 105
3/8" Drive.... N072, 142
Zephyr Frangible Collar Tools..N082
Hinged Head Pick-up Tools .. 683–684
Hobby Knife.... 362
Hoists & Lifts, Heavy-Duty N278-N282
Holders, Tool 84–94
Hole
Gauges 675
Reconditioners.... 376
Saws 495
Holesaws & Holesaw Sets, Bahco..... N188-N189
Holsters & Pouches, TOOLS@HEIGHT N216-N217
Hones 695
Hood Prop 661
Hook....328–329
Hook Type Spanner Wrenches 274
Hose
Air....505, 708
Air, Anti-Static 425
Clamp Pliers....635–636
Hose Reels, CoxReels ... N276-N277
Cutters, Slitters 634
Nozzles.... 724
Pinchers 547
Pinching Pliers 545
Reels 725
Removal Tools, Screwdriver Style ... 328
Hoses, A/C 625
Hub Cap Tools.... 588, 591
Hub Hatch Tools, TOOLS@HEIGHT..... N208
HVLP Spray Guns 708
Hybrid Battery Lift.... 605
Hydraulic
Bottle Jacks.... 602
Cable Cutter 429
Enerpac Hydraulic Tools . N143-N150
Hoists.... 605
Jacks, Bottle.... 602
Jacks, Service....601–602
Jacks, Transmission 604
King Pin Presses.... 594
Lift, Battery.... 605
Nut Splitter 429
Power Kits....401
Pressure Gauge 401
Puller....396, 400–404
Rams, Pumps 401
Tailpipe Expander.... 367
Torque Wrenches..... N124-N125
Transmission Jacks 604
Wet Sleeve Puller.... 408
Wheel Dollies 603
Williams Hydraulic Tools N135-N142
Hydrometer 615, 631

I

Idle Lock Nut Wrench.... 409
Ignition
Adaptor 745, 749, 751, 761
Spark Plug Gauge....680
Tools and Testers..... 551, 661, 680
Wrenches, Ford® Modulator for..... 551, 661
Wrenches, Open End....255
Imager, Digital Dual View.....528–530
Immersion Cleaners 722–723
Impact, 1/4" Drive
Extensions 121
Sockets 122–123
Swivel, Universal Joint 121
Impact, 3/8" Drive
Adaptors....162
Extensions 162

Sockets 163–167
Sockets, Twist 167
Swivel, Universal Joint 162
Impact, 1/2" Drive
Adaptors.....199
Extensions 199
Sockets 200–205
Sockets, Twist 204
Swivel, Universal Joint 199
Impact, 3/4" Drive
Adaptors.....217
Extensions 217
Locking Rings and Pins 217, 232
Sockets 218–220
Swivel, Universal Joint 217
Impact, 1" Drive
Adaptors..... 224
Extensions 224
Locking Rings and Pins ... 224, 228, 232
Sockets 225–227
Swivel, Universal Joint 224
Impact, 1 1/2" Drive
Adaptors..... 228
Extensions 228
Locking Rings and Pins ... 228, 230, 232
Sliding T-Handle..... 227
Sockets 228–230
Swivel, Universal Joint 228
Impact, 2 1/2" Drive
Locking Rings and Pins 230, 232
Sockets 231–232
Impact, #5 Spline Drive
Adaptors..... 228
Locking Rings and Pins 228
Sockets 152
Impact
Drivers..... N154, 161, 198
Drivers, Sets 161, 198
Gloves 733
Locking Ring and Pin Reference Chart 217, 224, 228, 230, 232
Wrench, Air 464, 466–470
Wrench, Cordless, 9.6V 456
Wrench, Cordless, 14.4V.... 445, 453
Wrench, Cordless, 18V 445, 447–450
Wrench, Cordless, Reference Chart 445
Wrench, Electric 460
Indicator Holders, Starrett Magnetic Base.....N197
Industrial Finish Hand Tools
Adaptors, 1/4" Drive ..109, 123, 144, 323
Adaptors, 3/8" Drive.....109, 144–145, 162, 168
Adaptors, 1/2" Drive 109, 144, 190, 199, 205
Adaptors, 3/4" Drive..... 215, 217
Adaptors, 1" Drive.....223–224
Adaptors, 1 1/2" Drive 228
Adaptors, High Performance, Spline.....228
Bit Sockets, 1/4" Drive 117, 120–121, 131–133

Bit Sockets, 3/8" Drive.....155–156, 158, 160, 168, 179–180
Bit Sockets, 1/2" Drive 195–198, 207, 211
Bit Sockets, 3/4" Drive.....216–217
Bit Sockets, 1" Drive..... 224
Breaker Bars, 1/2" Drive.....187
Crowfoot Wrenches.....N154
Extensions, 1/4" Drive.....108
Extensions, 3/8" Drive 143, 154, 162, 168,
Extensions, 1/2" Drive.....190, 199, 205
Extensions, 3/4" Drive 214, 217
Extensions, 1" Drive 224
Extensions, 1 1/2" Drive 228
Hex Keys..... 269–271
Ratchets, 1/4" Drive.....103, 105
Ratchets, 3/8" Drive 138, 141
Ratchets, 1/2" Drive.....185, 187
Ratchets, 3/4" Drive 214
Ratchets, 1" Drive 233
Screwdrivers N154
Sockets, 1/4" Drive 110–111, 114, 117, 122–124, 130
Sockets, 3/8" Drive 146, 148, 151–154, 163–169
Sockets, 1/2" Drive 192–194, 200–207
Sockets, 3/4" Drive ... 216, 218–220
Sockets, 1" Drive 225–227
Sockets, 1 1/2" Drive..... 228–230
Sockets, 2 1/2" Drive 231–232
Sockets, Ball Joint 590
Sockets, High Performance, Spline 3/8" Drive..... 152, 407
Universal Joints, 1/4" Drive..... 121
Universal Joints, 3/8" Drive 162, 168
Universal Joints, 1/2" Drive..... 190, 199
Universal Joints, 3/4" Drive 217
Universal Joints, 1" Drive 224
Universal Joints, 1 1/2" Drive..... 228
Wrenches, Adjustable 273–274
Wrenches, Box 252
Wrenches, Combination 245–247
Wrenches, Four-Way Angle Head Open End..... 256
Wrenches, Heavy Duty 263–265
Wrenches, Open End Crowfoot 3/8" Drive..... 259
Industrial Maintenance Tool Sets N012-N013
Industrial Power Tools N121-N150
Enerpac Hydraulic Cylinders ... N144
Enerpac Hydraulic Pumps.....N145
Enerpac Hydraulic Pumps & Cylinders..... N143
Enerpac Hydraulic Specialty Tools .. N146
Hydraulic Torque Wrenches N124
Pneumatic Torque Wrench Accessories..... N126
Sioux Air Die Grinders.....N131
Sioux Air Screwdrivers N130
Sioux Impact Wrenches.....N134
Sioux Production Air Drills..... N128
Sioux Scalers N133
Snap-on Air Drills N127
Williams Hydraulic AccessoriesN142
Williams Hydraulic Cylinders .. N138
Williams Hydraulic Maintenance Kits & Jacks.....N139
Williams Hydraulic Pump & Cylinder Combo Sets.....N136
Williams Hydraulic Pumps N135
Williams Hydraulic Specialty Tools.. N140
Industrial Puller Sets..... 400
Industrial Specialty Tools... N151-N200
Bahco Holesaws & Recip Blades..... N188
Bahco Insulated Pliers N182
Bahco Insulated Screwdrivers.. N181
Bahco Pliers & Cutters N186
Bahco Scrapers, Chisels, &Knives N192
Bahco Screwdrivers N184
Oil & Gas and Power Generation ... Tools N159
Production, Maintenance, & ..... Assembly Tools N154
Railroad Specialty Tools .N155–N158
Starrett Precision Tools N194
Williams 3/4" Socket Set.....N173
Williams Hand Tools N176
Williams Job Site Boxes..... N162
Williams Pipe Wrenches and Tongs. N174
Williams Sledge Hammers.....N178
Williams Wrenches N163
Wilton® BashTM Hammers.....N179

Industrial Torque Wrench... N154, 277, 279, 281
Information
System Repair.....764–765
System, ShopKey®..... 765
Infrared
Curing Light 707
Printer 527, 611
Thermometer 532–533
Injection Gun..... 621–622
Injection Pump Tools..... 119, 156, 407, 409
Injector
Brush 407,–408, 411, 413
Fuel, Carburetor Tools..... 549
Fuel, Diesel..... 119, 158, 407–411, 414–416, 418, 422
Fuel, Disconnect Tools 544, 546–547
Fuel, Micro Drill 496
Fuel, System Cleaner 416, 543
Fuel, System Tools..... 119, 158, 407–411, 414–416, 418, 422, 453–456, 542, 545–547
Fuel, Testing and Electronics ...542, 545
Gauge.....410
Harness Testers.....545
Height Gauge 410
Puller..... 409, 415
Pump Wrench.....409, 425
Socket 414–415
Timing Gauges 407
Wrench 409, 425
In-Line Sanders..... 483
Inserts, Socket 145
Inside Micrometers, Starrett N195
Inspection Mirrors 685–686
Installer Sets, Bushing .600, 667–669
Instinct®
Awls, Hooks and Picks 328
Circuit Testers 518–520, 628
Remote Start Switch 614
Screwdrivers 303–307, 309–311, 313
Test Lights 518–520, 628
Insulated
Insulated Cable Cutters, BahcoN183
Insulated Bolt Cutter, Bahco... N183
Insulated Pliers, Bahco ..N182-N183
Insulated Screwdrivers, Bahco.N181
TOOLS@HEIGHT N208, N244-N245
Interchangeable
Hammer.....355
Heads, Torque..... 286–292
Pliers Tip..... 340
Puller, General Purpose 395–396
Puller, Industrial Sets 400
Pullers, Bar Type.....400, 403–405
Torque Wrench 277–287, 286
Torque Wrench, Heads 287–292
Isuzu®, Diesel for..... 416, 540

J

Jack
Air..... 602
Aluminum 601
Automotive 601–602
Body.....696
Bottle 602
Hydraulic 601–603
Long Chassis..... 602
Manifold 367
Motorcycle.....604
Omega Vehicle Jacks..... N283-N285
Push-Pull 696
Short Chassis.....601
Stands..... 603
Transmission.....604
Wheel Dolly..... 603
Jacobs® Engine, Brake Tools for....408
Jo-Bolt Tool Set N082
John Bean Service Equipment
John Bean Alignment Lifts N260
John Bean Collision Service ... N261
John Bean Mobile Deployable ..... Column Lifts..... N258-N259
John Bean Tire Changers N266
John Bean Wheel Alignment ..... Systems..... N262-N263
John Bean Wheel Balancers N264-N265
Joint Rate Simulator Adaptor..... 294, 299
Jumper Cables 613

K

Key Chain 95
Keys, Personality 775
King Pin Presses 594
Knee Pads 740
Knives
Knives, Bahco N193
Hobby..... N193, 362
Lock Back..... N193, 359-360
Pocket N193, 359-360
Putty..... 366
Sharpening..... 362
Safety Knives, Williams.....N248
Utility N193, 360-362

L

Landscape Tools 360
Lanyards & Anchor Straps, TOOLS@HEIGHT N212-N213
Laplander Saw, Bahco.....N193
Laser Engravers N048
Level 5TM Laser Engravers N048-N049
Latch-on® Wrenches..... 240
Latex Gloves 735
Lathes, Brake Accessories 687
Leak Detector
A/C..... 621–623
Combustible Gas 526
Fluid 631, 656
Refrigerant..... 620
Smoke 524–525
Ultraviolet..... 621–623
Leather
Shears..... 698
Shot Dolly..... 699
Welding Gloves 558
Work Gloves 732, 734
Left Hand Drill Bits 383, 385, 493
Letter Drill Bit Set.....491
Level, TOOLS@HEIGHT N243
Level5 Tool Control
Level 5™ Data Matrix..... N037
Level 5™ Keyless Entry Tool Control N028-N041
Level 5™ Automated Tool Control.... N038-N041
Level 5™ Bulk Storage Keyless Entry N031
Level 5™ Heritage and Classic ..... Keyless Entry N032-N033
Level 5™ Masters Series Keyless ... Entry N034-N035
Level 5™ Visual Keyless Entry N028-N029
Level 5™ Laser Engravers..... N048-N049
Level 5™ TCMax Hardware N036-N037
Barcode Scanners.....N036
Label Printers.....N036
Pocket PC..... N037
Signature Pad N036
Software & Licenses N037
Tool Chits..... N037
Levels 678, 681
Levels, Starrett N198
Lifting
Battery, Hybrid..... 605
Come-Along Tool 605
Engine 605

Fuel Tank....604
Jacks....601–602
Lifting, Pulling Tool....605
Stands....603–604
Transmission....604
Wheel Dolly....603
Lifts, Challenger....N254-N255
Lighted Mirrors....685–686
Lights
Flashlight....638–639
Flexible....83, 643
Flood....643
Leak Detection....623
LED....638–641, 643
Magnetic....639
Shop....640–642
Timing....422, 535
Tool Storage....59, 82–83, 93
Fluorescent....642
Utility....641
UV, LED Flex....621
Lineman's Pliers....334, 337, 345, 349
Lithium Battery....459, 461–462
Lock
Pick Sets....328–329
Ring Pliers....339–340, 599
Lock Bars....95
Lock-Back Knives....359–360
Locker
Classic Series....48
Docker....36
EPIQ Series....20
Heritage Series....55
Masters Series....35–36
Locking
Adaptor, 1/4" Drive....123
Adaptor, 3/8" Drive....162
Adaptor, 1/2" Drive....190
Bar....95
Extensions, 1/4" Drive....108, 121, 128
Extensions, 3/8" Drive....143–144, 162, 168, 177
Extensions, 1/2" Drive....189–190, 199, 210
Knives....359–360
Lug Nut Remover Kit....582
Nut Driver....318
Pliers, Clamps....338, 565
Rings and Pins, 3/4" Drive....217, 232
Rings and Pins, 1" Drive....224, 228, 232
Rings and Pins, 1 1/2" Drive....228, 230, 232
Rings and Pins, 2 1/2" Drive....230, 232
Rings and Pins, #5 Spline Drive....228, 232
Speeder....188
Locking Rings and Pins, Impact
Reference Chart....217, 224, 228, 232
3/4" Drive....217, 232
1" Drive....224, 228, 232
1 1/2" Drive....228, 230, 232
2 1/2" Drive....230, 232
#5 Spline Drive....228, 232
Lock-out Tools....703
Locks
Padlocks....95
Tubular Assemblies....98
Long Reach Pliers....334, 336, 346
Looped Tool Holders....93

Low Profile
Ratchet....105, 141, 148–149, 182
Screwdrivers....N072, 312
Socket, 1/4" Drive....105
Socket, 3/8" Drive....141, 148–149
Socket, External Drive....384
Low Torque Slimline Wrenches....255
L-Shaped
Hex Wrenches....266, 269–271
Multi-Spline Wrenches....271
TORX® Wrenches....267, 271
Wrench....266–267, 269–271
Lubricants, Synthetic....736
Lubrication Kits....650
Lubrication Tools....645–653
Lubricator, Air Line....720
Lug Nut Tools....580–583

M

MacPherson Strut Tools....593
Magnetic
Accessories, Tool Storage....59, 78, 82–83, 85–87, 89–91, 93–94
Adaptor....109, 145
Base Holders....678
Bit Holder, Nonconductive....347
Bit Holder, Screwdriver....113, 315, 347
Bit Holder, Tool Storage Accessories....86
Bit Socket....112–113
Can, Bottle Holder....89
Holders and Trays....85–91, 93–94
Indicator Holders, Starrett Magnetic Base....N197
Insert Bit Holder....112–113, 323
Light....59, 82–83, 639
Nut Driver....322
Nut Holder....88, 323
Paint Gun Hook....710
Panels....89
Parts Tray....90
Pick-up Tools....683–684
Power Nut Drivers....488
Ratchet and Bit Sets....317
Screw Starters....317, 347
Screwdrivers....314–316
Socket, 1/4" Drive....123–124
Socket, 3/8" Drive....169
Socket, 1/2" Drive....206
Socket Clips, Rails, Holders and Trays....85–87
Spark Plug Sockets....372
Tool Holders....85–91
Tool Silhouettes....89
Tool Storage Accessories....59, 78, 82–83, 85–87, 89–91, 93–94
Trays....90
WorkStation Light....82–83
Wrench Organizer....87
Magnetic Base Indicator Holders, Starrett....N197
Mallet, Rubber....355, 588
Mandrel Mounted Abrasives....499
Manhole Cover Removal Tool....N159
Manifold
Gauge Set....624
Jack Set....367
Repair Kit....624
Marine Plug Screwdriver....313
Marking Set, Welder's....564
Master Bit Kit....319
Masters Series
Accessories, "Add-ons"....30–36
End Cabinet....32–34
Keyless Entry....N034
Locker....35–36
Overhead Cabinet....32
Reference Chart....6, 24–25
Roll Cab....24–29
Tool Utility Vehicles, "TUV"....37–40
Top Chest....30–31
WorkCenter....31
Master Tools@Height Sets, TOOLS@HEIGHT....N206–N207
Mastic Removal Tools....N118–N120, 424–425, 705
Mats, Rubber
Floor and Kneeling....96
TUV (Tool Utility Vehicle)....40
Work Surface....73
Measuring
Angle....N198, 600, 678
Caliper....N195, 676, 690
Contact Points and Extensions....N196, 677
Dial Test Indicator Sets N196-N197, 677
Feeler Gauges....N199-N200, 407, 411, 679-681

Inside Micrometers, Starrett....N195
Levels.....N198, 678, 681
Magnetic Base N197, 678
Micrometers and Sets ...N194-N195, 674-675
Pinion Depth Gauge..... N196, 677
Precision Straight Edges . N201, 682
Sets.....N194-N196, 681
Small Hole Gauge Set N199, 675
Spark Plug Gauges, Gappers 680
Starrett (see Starrett)..... N194-N201
Steel Rules.....N201, 682
Tape Rules 682
Telescoping Gauge Set.... N199, 675
Thread Gauge ..N199, 378-379, 381, 681
Mechanic's Stethoscope 531
Mechanical Fingers 683
MechanixWear® Gloves N250
Memory Saver/Power Inverter..... 458
Mercedes®, Diesel for..... 415–416, 418–419
Metal Boxes.....70, 95
Metal Cutting Shears
Air 481
Shears, Snips..... 698
Meter
AVR Testers 610–611
Digital 511–512
Duty Cycle.....511–512
Graphing 745, 747–749
Multimeters 511–512, 610
Specialty 413, 534
Torque 295
Volt-Amp..... 511–512, 520
Volt-Ohm 748–749
Metric Set Building N020–N023
Metric Tools
Alignment Tools.....589–593
Bolt Thread Gauge 381–382, 681
Brake Tools 689–695
Bushing Driver Set.....668–669
Carburetor Tools..... 549
Caster-Camber Tools.....591
Chasers, Thread 375
Compression Gauges.....538–539
Conversion Chart..... 680, G5
Crowfoot Wrenches, 1/4" Drive 258
Crowfoot Wrenches, 3/8" Drive 260–261
Crowfoot Wrenches, 1/2" Drive ..261
Diesel Injector Socket 414–415
Distributor Tools..... 550
Drain Plug Sockets ... 422, 599, 630
Drill Bits..... 491, 495
Feeler Gauges 679–681
File, Thread Restorer.....375
Flaring Tools..... 369
Folding Hex Wrenches..... 268–269
Fuel Injector Sockets.....414–415
Fuel, Pressure Sensor 412, 414, 417
Head Bolt Tools ..158–159, 196–197, 218, 220, 408, 417, 419, 593, 656,662
Hex Wrenches 266–271
L-Shape Hex Wrenches.....266, 269–271
Lug Nut Socket 581–583
Pressure Gauges, Tire 576–578
Ratcheting Box Wrenches, Combination 234–237
Ratcheting Box Wrenches, Crowfoot..... 261
Ratcheting Box Wrenches, Double Box.....238–241
Ratcheting Box Wrenches, High Performance.....238
Ratcheting Box Wrenches, Spline ... 238
Ratcheting Box Wrenches, T-Handle 239
Rethreading Tools..... 374–376
Screwdrivers 285
Set Building Program..... N020-N023, 437-440
Spark Plug Hole Rethreaders.... 376
Spindle Rethreader.....375
T-Shape Hex Wrenches..... 128–129
Taps and Dies..... 378–381
Thread Chasers 375
Thread Pitch Gauge ..378–379, 381, 681
Threading Tools.....378–382
Tire, Wheel Tools 576–578, 580–587, 589–593
TORQOMETER® Wrenches..282–284
Torque Adaptors.....154, 419
Torque Wrenches..... 280–285
Transmission Drain Plug Socket..... 197, 422, 599
Tube Cutting, Flaring Tools 368–369
Valve Cover Bolt Socket.....656, 662
Valve Tools..... 662–664
Metric, Tool Sets
Automotive Tool Sets 437–440
Set Building Program..... 437–440
Micro Air Tools
Drill, 1/4" 474
Finishing Tools, Kits..... 485
Reference Chart..... 465
Tool Accessory Kits 496
Micrometers
Digital 674
Inside, Starrett N195
Outside..... 674
RM130 Rotor.....690
Starrett..... N194-N197
Test Gauges 675
Micrometers, Starrett N194-N197
Micrometers, Tubular, Starrett ... N196
MicroVAT™ 610–611
Midget Chisels..... 352
Midget Punches..... 352
MIG Torch 554–555
MIG Wire Feed Welders..... 553–554
Military Diagnostic Scan Tool..... N267
Mini Tip Screwdriver.....303–307, 310
Miniature
Air Ratchet 471–472
Awls, Hooks and Picks 311, 328
Cutter 345–346
Die Grinder, Air.....477–478
File 363
Flex Light 621
Hacksaw 358
Pliers.....345–346, 561
Screwdriver, Electronic Service 308–309
Screwdriver, Flat Tip 303–305, 308–309, 311
Screwdriver, Phillips® Tip 303–304, 306–309
Screwdriver, Sets 303–304, 308–309
Screwdriver, Special Application 311
Screwdriver, Tamper Resistant...310
Soldering Torch, Butane.....561
Utility Knife..... 360
Mirrors
Hinged..... 685–686
Inspection.....684–686
LED Telescoping 686
Lighted 685–686
Pocket 685
Telescoping..... 685–686
Mitchell1® Service Programs 740
Miter Gages, Starrett..... N198
Mobea Hose Clamp Pliers 635
Mobile
Battery Charger, Cordless Tools 459, 462
Industrial Puller Set.....400
Tool Storage, Cart..... 57–60, 64–66, 564
WorkStation..... 57
MODIS™ Accessories..... 758–761
MODIS™ Ultra
Accessories.....747, 756, 758–761, 763
Software 747

Modular Connectors, Crimping Tools . 343–344
Modulator Wrench 551
Motor Oil, Air 506
Motorcycle
  Air Chuck 422
  Compression Gauge..... 538
  Exhaust Probe 527
  Gas Tank Cover 421
  Jack 422
  Lift/Jack..... 604
  Oil Fillers 421, 648
  Service Tools..... 420–422
  Spark Plug Socket 372–373, 420
  Special Purpose, Application.... 423
  Tire Changer..... 422, 570
  Voltage Tester 423
  Wheel Balancer 422, 570
Muffler Tools 367, 591
Multi-
  Cut Flat File 364
  Cylinder Secondary Ignition Adaptor 761
  Function Switch Tool..... 536
  Position Prybar.....331
  Purpose Cutter, Scraper 360, 366
  Spline.....271, 383–384
  Spline Extractors 383–384
  Spline Wrenches 271
Multimeters..... 511–512, 610
Multiplier Geared Head 292–293
Multiplier Wrenches.....292–293

N

Needle
  Files 364
  Nose Pliers.....334, 336, 345–346, 349
  Scaler.....484, 500
Nibbler.....481
Ni-Cad Battery 459
Noise and Vibration Diagnostic Unit .. 531
Nonconductive
  Adaptor 348
  Breaker Bar..... 348
  Driver 349
  Extension..... 348
  Pliers..... 349
  Ratchet..... 348
  Screw Starter 347
  Screwdriver..... 347
  Socket 348
  Wrench, Ratcheting Box..... 349
Non-Magnetic Feeler Gauge..... 680
Non-Marring
  Prybar 331
  Scraper..... 364–366
Nozzles, Water..... 724
Nut
  Axle, Socket 584–585
  Driver 318, 349
  Driver, Magnetic Power 488
  Driver, Nonconductive..... 349
  Holder, Magnetic.....88, 323, 321–322
  Setting 699
  Splitter 429
  Starters 317
  Wrench 409
Nylon Tool Chest Covers
  Road Chests..... 61, 75
  Roll Carts 75
  Tool Storage Combinations....74–75
  TUV (Tool Utility Vehicle) 37–40
NYROC® Mastic Removal Tools .. N118, 424-425

O

OBD-II Break Out Box 521
OBD-II Code Readers 766
OEM Applications I26–I30
Offset Screwdrivers..... N072, 311, 317
Oil
  Air Motor 506
  Crusher..... 645
  Drains..... 652
  Drum Plug Sockets 205, 652
  Filler, Motorcycle 421, 648
  Fillers, Funnels, Spouts..... 421, 648–649
  Filter, Aviation Wrench 425
  Filter, Crusher 645
  Filter, Pliers, Sockets 412, 414, 645–646
  Filter, Wrenches..... 274, 425, 646–647
  Oilers 653
  Opener, Can 425
  Pliers..... 645
  Pressure Gauge 541, 655
  Pressure Sender Switch Socket..655
  Pump Removal Tool.....655
  Pumps 652
  Spray Gun 651
  Wrenches..... 274, 425, 646–647
Oil Filler 421, 648–649
Oil Filter
  Crushers..... 645
  Pliers..... 645
  Socket 412, 414, 645–646
  Wrench 274, 425, 646–647
Oil and Gas Tools 427
Oilers..... 653
One Drawer at-a-Time Storage System N050
Open End
  Torque Wrench 290–291
  Wrench, AN Fitting..... 256, 273
  Wrench, Combination Box 234–237, 241–249
  Wrench, Combination Flare Nut..257
  Wrench, Combination Ratcheting Box..... 234–237
  Wrench, Combination Spline 249
  Wrench, Crowfoot 1/4" Drive..... 258
  Wrench, Crowfoot 3/8" Drive..... 258–261
  Wrench, Crowfoot 1/2" Drive 261–262
  Wrench, Double End Flare Nut....257
  Wrench, Double End Open..... 254–256
  Wrench, Flex-Combination..... 237, 248
  Wrench, Torque Interchangeable Head 277–278, 286
  Wrench, Tubular 265
Orbital Sanders 482–483
Oval Punches.....353
Oxygen Sensor Tools..... 548

P

Pad, Knee..... 740
Padlocks 95
Paint
  Airbrushing.....710
  Gun 708
  Gun Cleaning 711
  Gun Hook.....710
  Spray Equipment..... 708–710
  Spray Guns 708
  Tool Storage Unit Touch-up..... 97
Panel Tools, Door.....700–703
Parallels, Starrett..... N198
Parking Brake Removal Tool..... 695
Parts Cleaning Brushes 724, 738
Parts Storage Cases 68, 71
Parts Trays 90, 93–94
Parts Washers
  Aqueous Based 723
  Solvent Based 722
  Washer Accessories.....723–724
PASS THRU PRO II..... 764
Pelican™ Safety Lighting . N249–N250
Pelican™ Storage Cases.... N045-N047
Pencil Die Grinders..... 478

Pentagon Socket..... N159, 153, 194
Personality Keys 775
Persuader Wrench, Valve 274, 427
Phillips®
ACR® Bits 315–317, 319, 321–322, 324, 326
Bit 319–322
Bit Sockets... 121, 133–134, 160, 198
Composite, Nonconductive..... 347
Mini-Tip Screwdrivers 303–304, 306–309
Pocket Screwdriver 307
Power Bits..... 326
Screwdriver..... 303–304, 306–309
Stubby Screwdrivers ..303–304, 314
Wobble Bits 324
Pick Sets 328–329
Pickle Fork..... 590
Picks, Body 702
Picks, Lighted..... 329
Pick-up Tools
Claws 683
Lighted Magnetic..... 683
Magnetic 683–684
Pilot Bearing Pullers.....393, 406
Pilot Drills 495
Pin
Gripping Pliers 336
Punches.....351–352
Punches, Starrett Brass.....N200
Punches, Starrett Drive Pin.....N200
Pin Punches, Starrett N200
Pin Vises, Starrett..... N199
Spanner Adjustable 274, 628
Pin-Type Spanner Wrenches.....274
Pinch Bars..... 332
Pinching Pliers.....545
Pinion Depth Gauge 677
Pinion Nut Sockets..... 596
Pipe
Nipple Remover.....130, 388
Plug Extractor.....383, 386
Plug Sockets 116, 153, 194
Wrenches..... 272, 287, 427
Wrenches, TOOLS@HEIGHT.... N234
Pistol Grip Screwdrivers 314
Piston Service Tools 354, 665–666
Pitch Gages, Starrett N199
Pitman Arm Pullers..... 390, 392, 395
Plasma Cutters 557
Plastic
Boxes 68–69
Cleaning Solution..... 95
Cutter 335
Drawer Dividers..... 91, 93
Tip Hammers.....355
Pliers
Adjustable Joint..... 334, 337, 345–346
Battery 614
Boot Clamp 596
Brake Spring 689
Cable Clamp.....614
Clamping 565
Combination, Slip-Joint 334, 337
Composite, Nonconductive..... 349
Connector 343–344, 426
Cotter Pin..... 588
Crimping.....343–344
Cutting, Bahco ergo® N186
Duck Bill 336
Electrical Service 341–342
Exhaust Hanger Removal..... 367
Fuse 536
Heater Hose Clamp 635–636
Heavy Duty..... 337
High Leverage 335, 337, 588
Hose Pinching 545, 547
Hose Pulling.....635–636
Interchangeable Tip 340
Insulated, Bahco N182-N183
Lineman's 334, 337, 345, 349
Locking..... 338, 565
Long Nose..... 338, 345–346
Long Reach 334, 336, 346
Miniature 345–346, 561
Needle Nose..... 334, 336, 345–346
Nonconductive Composite..... 349
Oil Filter..... 645
Pin Gripping..... 336
Pinching 545, 547
Radiator Hose Clamp 635–636
Retaining Ring..... 339–340, 599
Set 334, 337–340, 345–346
Snap Ring 339–340, 599
Spark Plug Boot 370
Special Purpose, Application 335–337
Talon Grip™..... 334, 336–337
TOOLS@HEIGHT N240-N241
Valve Stem Seal..... 663
Wheel Weight.....569, 571
Wire Twisting 423
Wrench 273
Pliers, ergo® Cutting, Bahco..... N186
Pneumatic Torque
Filter, Regulator, Lubricator.....301
Reaction Arms N126, 301
Torque Wrenches.....301
Wheel Kits N126
Pocket
Blow Guns 504
Knives 359–360
Magnifier..... 643
Mirrors 685
Rule..... 682
Screwdriver..... 306–307
Sharpener..... 362
Thermometer 627
Pocket iQ™
Accessories.....771
Scan Tool 771
Software 772
Polisher
Air 485
Electric 460
Polishing and Sanding Kits..... 485
Polishing, Supplies 95, 736
Portable Mechanics' Service Sets..... N008
Portable Pressure Blast Systems ... 711
Portable Tool Storage, Industrial N042-N047
All Weather Mobile Storage Chest.. N042-N043
PelicanTM Storage Cases N045-N047
Sentinel® Storage Cases N044
Wheeled Tote N043
Potentiometer Adjuster 308
Pouches, TOOLS@HEIGHT N217
Power
Adaptors, 1/4" Drive 123
Adaptors, 3/8" Drive.....168
Adaptors, 1/2" Drive 205
Antenna Socket 706
Bits 123, 168, 206–207, 326–327
Bit Kits.....321–322, 488, 489
Bit Sockets, Hex 168, 207
Bit Sockets, TORX® 123, 168, 206
Bits, Square 327
Cords..... 643
Drivers..... 123, 168, 206
Hex Drivers 188, 207
Hex Shanks, 1/4" Drive 123
Hex Shanks, 3/8" Drive.....168
Hex Shanks, 1/2" Drive..... 205
Inverters 458, 609, 612
Magnetic Sockets, 1/4" Drive 123–124
Magnetic Sockets, 3/8" Drive 169
Magnetic Sockets, 1/2" Drive.... 206
Shears.....481
Sockets, 1/4" Drive 123–124
Sockets, 3/8" Drive 168–169
Sockets, 1/2" Drive 206–207
Steering, Alternator, Pullers 390, 394–395, 657
Steering, Alternator, Service Tools.. 657

Universal Joint, 3/8" Drive.....168
Power Tools
Accessories.....460, 488–506
Air 464–486
Cordless 445–462
Electric, Corded 460
International Product.....461–462
Power Tools, Industrial (See Industrial Power Tools) N121-N150
PowerCab™
End Cabinet, Masters Series..... 34
Pozidriv®
Bit.....160, 180, 324, 327
Bit Socket 160, 180
Driver 160, 180, 313, 317
Hex Shank Bits 319, 324, 327
Screwdriver..... 313, 317
Precision Measuring, Starrett..... N194-N201
Precision Straight Edges..... 682
Preset Torque Wrenches 285–286
Presses
Arbor.....717
Ball Joint..... 589
Ball Joint Adaptors..... 589
Brake Caliper/Piston 692–693
King Pin..... 594
Step Plate.....717
Pressure
Blast Systems 711–713
Gauge, Compression.....538–540
Gauge, Fuel Injection 542–543
Gauge, Hydraulic.....401, 404
Gauge, Oil.....541, 655
Gauge, Tire 576–578
Gauge, Transmission 541
Gauge, Vacuum 541–542, 686
Screw 390–395, 397–404, 406, 408
Washers N275, 725–726
Pressure Washers, CamSpray Heavy-Duty N275
Printer
Infrared 527, 611
Paper..... 527, 611
Wireless..... 527, 611
Probe
Amp 513, 745, 747, 749, 751, 756, 760
Exhaust 527
Extension.....514
Ignition Quick 534
Temperature.....514
Pro-Cut Rotor Matching Systems N256-N257
Pro-Link® iQ™
Accessories.....774
Software.....773
Pro-Link® Ultra
Accessories.....769–770
Scan Tool 767–768
Software..... 769
Protractors, Starrett N198
Pruner, Hand 360
Pruning Saw 360
Prybar
Fiberglass N177, 330
Heavy Duty.....330–332
Multiposition 331
Non-Marring 331
Rack 93–94, 332
Set 330–332
Striking 330–331
Pull Rods..... 702
Puller
Adaptor 391–393, 400–401, 403–406
Alternator Pulley..... 394, 657
Automotive 393–395
Axle..... 392–393, 594–595
Bar Type.....400, 403–405
Battery Cable Clamp 614
Bearing Separator 392, 400, 405
Blind Hole Bearing..... 400, 406
Body Dent..... 566–567, 696
Bolt Grip 393
Bushing.....392–393
Cable Clamp.....614
Cotter Pin.....588, 636
Dent 566–567, 696
Diesel Injector..... 409, 415
Diesel Turbo Vane Actuator.....413
Differential Side Bearing..... 390
Dowel Pin..... 388
Features..... 389
Freeze Plug 630
Fuel Injector 409, 415
Gear 390, 392, 407–408
Harmonic Damper..... 394
Heavy Duty..... 395–396, 399
Hydraulic 396, 400–404
Industrial.....400
Injector..... 409, 415
Interchangeable 390–392, 395–396
Jaw Type 393–400, 402, 404
King Pin..... 594
Light Duty 395, 400
Medium Duty..... 395
Pilot Bearing 393, 406
Pitman® Arm 390, 392, 395
Power Steering Pulley 390, 394–395, 657
Pulley 390, 394, 396, 413
Pumps and Rams..... 401, 404
Push, Pull 400, 403, 405–406
Quarter Panel..... 696
Rear Axle 392–393
Selection Guide..... 389
Side Bearing 390, 392
Slide Hammer 388, 392–393, 395, 398–400, 407, 409, 566–567, 595, 600, 696
Special Purpose 393
Specifications 399, 404
Steering Pivot Pin 393
Steering Wheel..... 393
Steering Wheel Lock Plate Depressor.....393
Stud 386–387
Tapped Hole..... 393, 400, 403
Universal Wheel 595
Wet Sleeve..... 408
Wheel Hub 595
Pulse Adaptor, Diesel..... 413, 534
Pump Adjusting Tools, Diesel..... 409
Punch
Brass Pin, Starrett N200
Chisel Holder, and..... 351
Chisel Set, and.....351–353
Chisel, Air Hammer..... 500–501
Heavy Duty.....353
Soft Grip 353
Push Rod Tools 411
Putty Knives 364, 366

Q

Quick Change
Anvil, 9.6V 456
Anvil, 14.4V..... 453
Anvil, 18V..... 447–449
Anvil, Reference Chart..... 464
Bit Set 460, 488
Chuck, Air Hammer.....475, 501
Chuck, Drill 453, 456
Coupler, Air..... 506
Coupler, Diesel.....413
Coupler, Screwdriver Bit..... 323
Extension Set..... 460
Tip, Blow Gun..... 504
Quick Connect, Disconnect Tools
Air Conditioning Service..... 628
Carburetor 546
Fuel 546–547
Jiffy-Tite®, Low Profile 547
Radiator..... 630
Transmission..... 598
Quick Release Ratchets 104, 127, 140, 175, 186, 210

R

Race Drivers, Bearing 669
Radiator Tools..... 630–636
Radio Trim Nut Socket 706
Radioman Kit..... N010
Radius Gage Set, Starrett N200
Railroad Tools.....N155-N157, 301, 428–429
  Bridge & Building Tools.....N158
  Car Shop Tools N157-N158
  Locomotive Tools.....N156-N157
  Track Tools N155
Rails and Clips, Socket 84–86
Ratchet
  1/4" Drive 103–105, 112, 127
  3/8" Drive..... 138–142, 148–149, 175, 182
  1/2" Drive..... 185–187, 210
  Accessories, Air..... 502
  Adaptor 106, 142, 187
  Air 471–472
  Compact Head 140
  Cordless 446, 454
  Dual 80™ Technology 103–105, 138–142, 185–186
  Fingertip.....104, 127
  Flex Head, 1/4" Drive 103–105
  Flex Head, 3/8" Drive..... 138–140
  Flex Head, 1/2" Drive 185–186
  Flex Head, Pass Thru.....182
  FOD. N070, 105, 141, 186
  Heads, Handles..... 214, 223
  Heads, Ratchet, 3/4" Drive.....214
  Heads, Ratchet, 1" Drive..... 223
  Heads, Torque Wrench 287, 291
  Hi-Lok® N070, 105, 142, 427
  Insulating, Composite..... 348
  Low Profile... 105, 141, 148–149, 182
  Nonconductive 348
  Palm.....142
  Quick Release 104, 127, 140, 175, 186, 210
  Repair Kit.....103–106, 138–142, 185–187, 214, 223
  Round Head 104, 141
  Sets.....127, 175, 210
  Special Purpose, Application... 142, 187
  Spinners..... 106, 127, 142, 176, 187
  Spud 187
  Swivel..... 104, 141
Ratchet and Bit Sets.....316–317
Ratcheting
  Adaptor 106, 142, 187, 215
  Bit Sets..... 319–322
  Box Wrenches, Combination 234–237
  Box Wrenches, Crowfoot 261
  Box Wrenches, Doubl Box. 238–240
  Box Wrenches, High Performance... 238
  Box Wrenches, Nonconductive.. 349
  Box Wrenches, Spline 238
  Box Wrenches, T-Handle..... 239
  Box Wrenches, Torque Interchangeable Head.....287
  Crimpers..... 343
  Cutter 368
  Driver 107, 313–317
  Flare Nut, Torque Interchangeable Head..... 291
  Pip Wrenches, Torque Interchangeable Head.....287
  Screwdriver.....314–317
  Tap Wrenches..... 382
  T-Handle Driver..... 107, 315
  Torque Wrench 276–281
Reamer, Tapered 496
Rear Axle Puller 392–393
Rechargeable Utility Lights 641
Reciprocating Saw
  Air 480–481
  Cordless, 18V 446, 451
Reciprocating Saw Blades & Sets, .. Bahco N190-N191
Refrigerant
  Leak Detector 620–623
  Recovery Recycling Center..... 617–628
  Scale, Charging 621
Regulators, Air Line..... 709, 720
Remote Control
  Mirror Tools..... 706
  Starter Switch 614
Repair
  Body.....566–567, 696–707
  Collision 566–567, 696
  Extension.....108, 143, 189
  Extractor, Porcelain 370
  Information System, ShopKey®..... 765
  Manifold 367, 624
  Ratchet..... 103–106, 138–142, 185–187, 214, 223
Respirator Filters 731
Retaining Ring Pliers.... 339–340, 599
Rethreading Tools 374–376
Reversible
  Cut Off Tool, Air 479
  Disc Sander..... 483
  Drill, Air 473–474
  Screwdriver Blade 311
Ridge Reamer, Cylinder 665
Right Angle Drill.....474, 494
Rim Tools, Wheel 569–573, 588
Riveters and Rivet Kits.. 501, 699–700
Road Chest 61–62
Roll Cab
  Classic Series..... 44–46
  Cover.....74–75
  Customization 78–82
  EPIQ Series 10–17
  Heritage Series.....50–52
  Masters Series 24–29
  Reference Chart.....6
Roll Carts..... 57–60, 64–66, 564
Roll Pin Punches 352, 500–502
Rotor Thickness Gauge.....690
Round Head Ratchets 104, 141
Rubber
  Hammer..... 355, 588
  Mat, Tool Storage 73
Runout Gauges 690

S

Safety
  Arm Protectors 558
  Back Supports..... 740
  Drawer Tool Storage..... N050
  Ear Protection 729, 731
  Face Protection..... 729
  Glasses..... 729–731
  Gloves 558, 732–735
  Goggles 629, 731
  Hearing Protection.....729, 731
  Knee Pads..... 740
  Respirators and Filters 731
  Welding Helmets 562–563, 729
  Wiring..... 423–424
Sandblaster.....713
Sander
  Accessories..... 496
  Air 482–485
  Belt 484
  Disc, Reversible..... 483
  Dual Action 483
  Orbital and Geared 482–483
Sanding
  Blocks 705
  Kits 485
Saw
  Air 480–481
  Blade..... 358, 502–503
  Cordless 451, 454
  Folding, Pruning..... 360
  Hack..... 358

Hand 358
Hole 495
Holesaws & Holesaw Sets N188-N189
Micro 481
Mini 358
Pruning 360
Quick Cutter 358
Reciprocating, Air 481
Reciprocating Blades & Sets, Bahco N190-N191
Reciprocating, Cordless 451, 454
Scaffold Builders Tool Sets, TOOLS@HEIGHT N209
Scaffold Ratchets N228, 187
Scanner and Accessories 744–775
Scissor Lifts 604
Scissors 358, 604
Scopes
Electronic Stethoscopes 530–531
Video Borescopes 528–530
Scraper
Cabinet Scrapers, Bahco N192
Carbon 365–366
Multipurpose 364–366
Non-Marring 364–365
Set 365–366
Striking 365
TOOLS@HEIGHT N242-N243
Window 704
Screw
Extractors 383–386
Pitch Gauge N199, 381–382
Starters 317, 347
Screwdriver
Air N130
Bahco XHD N184-N185
Bits and Accessories 323
Clutch 324
Cordless 453, 456
Diamond Tip 306
Dzus®, Fastener for 310,311
Electronic Service 308–309
Flat Tip 303–312
Hex 308
Instinct® 303–307, 309–313
Insulated N181, 347
Low Profile 312
Marine Plug 313
Mini Tip 303–307, 310
Miniature 308
Nonconductive 347
Offset 311, 317
Phillips® 303–304, 306–309, 311
Pocket 306–307
Pop Up 312
Potentiometer Adjusting 308
Pozidriv® 313
Rack 57, 93
Ratcheting 313–317
Ratcheting Insulated, Bahco N181
Reversible Blade 311
Set 303–304, 306, 308–313, 316–317
Sets, Bahco N181, N184
Spark Test 306
Special Purpose, Application 311–313
Square Tip 312
Square Tip, Bits 327
Tamper-Resistant 310
T-Handle, T-Shape 315
TOOLS@HEIGHT N238
Torque 285
TORX®, TORX Plus® 309–311
Screw Pitch Gauge N199, 381-382
Screwdrivers, XHD, Bahco N184-N185
Screwdriver, Insulated, Bahco N181
Screwdriver, Ratcheting Insulated, Bahco N181
Screwdriver, Sets, Bahco N181, N184
Scribe 329
Scribers, Starrett N198
Scrulox® 319, 321
Seal
Drivers 668–669
Installers 599, 663
Puller 588, 599, 662
Removal Tools, Cam Seal 661–662
Removal Tools, Pliers Style 370
Removal Tools, Screwdriver Style 328, 422
Removal Tools, Sets 661–662
Removal Tools, Transmission 422, 599
Sealing Cap Sets 598
Seat
Covers, Automotive 670
Creeper 673
Sensor
Socket, Diesel 412, 414, 417
Socket, Oxygen 548
Versatorq® 295
Voltage 523
Sentinel® Storage Cases N044
Serpentine Belt Tools 412, 658–659
Service Banner, Diagnostic 619, 746–747, 749, 751, 754, 756–757
Set Building Programs
US Set Building Program N014–N019,431–436
Metric Set Building Program N020–N023, 437–440
Tool Control Set Building N024-N025
Sets, TOOLS@HEIGHT N206-N207
Sets, US and Metric-General Service
1/8" Drive 126
1/4" Drive 124–126, 135–136
3/8" Drive 136, 170–175, 182–183
1/2" Drive 208–209, 212
3/4" Drive 221
Shackle Pin Sockets 586
Shaft Alignment Clamps, Starrett N200
Shanks, Power Hex
1/4" Drive 123
3/8" Drive 168
1/2" Drive 205
Sets 322
Shears
Metal Cutting 698
Powered 481
Shop 698
Vinyl 698
Shelf, Folding 94
Shelving N291
Shelving, Cabinets, & Workbenches, Equipto N291-N295
Shock Absorber Tools 591
Shop Fans 727
Shop Presses 717
Shop Supplies 736–740
Shop Tools, Jet Industrial N286-N288
Shop Vacuums 726–727
ShopKey® 765
ShopKey® Pro N268-N269
Short Circuit Locator 522
Shot Dolly 699
Side Bearing Pullers 390, 392
Side Cutters 334–337, 342, 345–346
Single Square Sockets 227, 427
Sioux Aerospace Air Tools
45°& 90° Aircraft Angle Drills N115
Pistol Grip Air Drills N115
Pistol Grip Rivet Shavers N115
Pistol Grip Skin Clamp Runner N115
Sioux Production Air Tools
Air Die Grinders N131-N132
Air Screwdrivers, Adjustable Clutch N130
Air Screwdrivers, Positive Clutch N130
Air Screwdrivers, Stall Drive N130
Horizontal Wheel Grinders N132
Non-Reversible Air Drills N129
Reversible Air Drills N128
Right Angle Wheel Grinders N132
Scalers, Octagon Shank N133
Scalers, Square Shank N133
Vertical Wheel Grinders N132
Sioux Industrial-Duty Air Impact Wrenches N134
Siphon Gun, Oil 651
Slatebar 332
Sledge Hammer N178-N180, 354, 356

Sledge Hammer Wrenches... 263–264
Slide Hammer Pullers
2 Jaw 398
3 Jaw 398
Bearing, Blind Hole..... 406
Body, Dent 566–567, 696
Dowel Pin..... 388
Injector..... 409, 415
Interchangeable, Bar Type..... 392
Interchangeable, General Purpose.. 395–396
Pipe Nipple 388
Reference Chart..... 399
Sets, Industrial..... 400
Special Purpose 393, 566–567, 595, 600, 696
Sliding T-Handles
1/4" Drive 107
3/8" Drive 143
1/2" Drive..... 188
3/4" Drive 214
1" Drive 223
1 1/2" Drive 227
Sliding Trays..... 94
Slimline Wrenches 255, 272
Sling, Engine 605
Slip-Joint Pliers..... 334, 337, 345–346
Slitting Chisels 501
Small Arms Repairman Tool Kit... N007
Small Bore Gages, Starrett..... N199
Small Hole Gauge Set..... 675
Small Metal Boxes.....70, 95
Smoke Machine 524–526
Snap Ring Pliers 339–340, 599
Snap Ring Retention Device ...162, 199
Snips
Aviation 698
Light Duty and All Purpose 698
Tin..... 698
Socket
1/4" Drive 110–124, 129–136
3/8" Drive.....146–160, 163–169, 178–183
1/2" Drive.....191–198, 200–207, 211–212
3/4" Drive 215–221
1" Drive 223–227, 586–587
1 1/2" Drive 228–230
2 1/2" Drive 231–232
Axle Nut.....584–585
Ball Joint..... 590
Bit, 1/4" Drive 117–121, 123, 131–135, 180–181, 212
Bit, 3/8" Drive 134–135, 155–160, 168, 179–181, 212
Bit, 1/2" Drive.....134–135, 180–181, 195–198, 206–207, 211–212
Bit, 3/4" Drive 216–217
Bit, 1" Drive 224
Budd Wheel 587
Clips, Rails, Holders and Trays 84–87
Composite, Nonconductive..... 348
Crank Shaft Bolt, 1/2" Drive..... 205
Double Square, 1/4" Drive..... 116, 130, 324
Double Square, 3/8" Drive 153
Double Square, 1/2" Drive 194, 206
Double Square, 1" Drive 227
Drag Link, 3/8" Drive 153, 422
Drag Link, 1/2" Drive..... 194, 422
Drag Link, 3/4" Drive 216
Drain Plug, Engine, Oil.....155, 197, 316, 408, 417, 422, 655
Drain Plug, Radiator..... 630
Driver Tray.....86
Drum Plug..... 205, 652
Engine 408, 427
Engine Barring 662
Filter..... 412, 414, 645
Flank Drive®, Flank Drive® Plus, 1/4" Drive 110–115,122
Flank Drive®, Flank Drive® Plus, 3/8" Drive..... 146–150, 153, 163–166
Flank Drive®, Flank Drive® Plus, 1/2" Drive 191–194, 200–204
Flank Drive®, Flank Drive® Plus, 3/4" Drive.....215, 218–220
Flank Drive®, Flank Drive® Plus, 1" Drive.....225–227
Flank Drive®, Flank Drive® Plus, 1 1/2" Drive 228–230
Flank Drive®, Flank Drive® Plus, 2 1/2" Drive.....231–232
Flare Nut 153, 407, 414
Flip, 1/4" Drive 117
Flip, Lug Nut, Retaining..... 581–583
Flip, Oil Filter..... 414, 645
Fuel Pressure Sensor .. 412, 414, 417
Hand 417, 420
Head Bolt.....198, 417, 656
High Performance..... 115
Holders..... 84–87
Hose Clamp..... 419, 426
Impact, 1/4" Drive 122–123, 130
Impact, 3/8" Drive 163–167
Impact, 1/2" Drive..... 200–205
Impact, 3/4" Drive 218–220
Impact, 1" Drive 225–227
Impact, 1 1/2" Drive 228–230
Impact, 2 1/2" Drive 231–232
Impact, Heavy Duty Truck ...417–419
Injector, Diesel.....414–415
Inserts, Non-Marring 145
Lock 583
Long.....111, 132, 157–159, 179, 196, 583, 701
Low Profile, 1/4" Drive ..112–113, 115
Low Profile, 3/8" Drive.....148–150
Lug Nut..... 581–583
Magnetic, 1/4" Drive 123–124
Magnetic, 3/8" Drive 169
Magnetic, 1/2" Drive 206
Magnetic, Surface Drive, 3/8" Drive 169
Metric Injector.....415
Mirror 706
Nonconductive 348
Oil Filter..... 414, 645
Oil Pressure Sender Switch 655
Organizers 84–87
Pipe Plug 116, 153, 194
Power, 1/4" Drive.....123–124
Power, 3/8" Drive 168
Power, 1/2" Drive..... 206–207
Railroad..... 428
Retaining 581–583
Sensor, ICP 412
Sensor, Oxygen 548
Sensor, Water 414
Set, 1/4" Drive....110–120, 122–123, 130–136
Set, 3/8" Drive ...146–159, 163–167, 180–183
Set, 1/2" Drive....191–193, 196–197, 200–204, 212
Set, 3/4" Drive 218–219
Set, 1" Drive 225–226
Set, 1 1/2" Drive..... 229
Set, 2 1/2" Drive 231–232
Set, Combination..... 112, 114, 116–120, 134–136, 147, 151–152, 155–159, 180–183, 193, 212
Set, General Service 1/8" Drive..124
..... Set, General Service 1/4" Drive 124–126, 135–136
Set, General Service 3/8" Drive 136, 170–175, 182–183
Set, General Service 1/2" Drive..... 208–209, 212
Set, General Service 3/4" Drive 221
Set, Hex Bit.....119–120, 132–135, 157–159, 181, 196, 212
Set, Impact Drivers 161, 198
Set, Nonconductive/Composite 348
Set, Spline..... 116, 152
Set, TORX® Bit 117–119, 134–136, 155–156, 180–181, 212
Set, Triple Square Bit .. 159, 180, 197
Shock Absorber.....591
Spanner..... 411
Spark Plug 371–373, 420

Special Purpose/Application, 1/4" Drive 116–117, 120, 123
Special Purpose/Application, 3/8" Drive.....153–154, 156, 160, 166–167, 373
Special Purpose/Application, 1/2" Drive 194, 198, 204–205
Special Purpose/Application, 3/4" Drive 216
Special Purpose/Application, 1" Drive 227
Special Purpose/Application, Diesel.....411
Special Purpose/Application, Heavy Duty Truck..... 417–419
Special Purpose/Application, Railroad.....428
Special Purpose/Application, Spark Plug 371–373, 420
Spline, 1/4" Drive N073, 116
Spline, 3/8" Drive..... N073, 152
Spline, 1/2" Drive 194, 407
Spline, 3/4" Drive.....216
Spline, 1" Drive..... 223
Surface Drive, 3/8" Drive.....169
Surface Drive, 1/2" Drive 207
Switch 655, 662
Swivel, 1/4" Drive 122
Swivel, 3/8" Drive 165–166, 371–372
Swivel, 1/2" Drive 204, 418
Tap 381–382
Thermal Vacuum Switch 662
Thin Wall.....203, 220, 227, 418
Tie Rod 593
TORX®, TORX Plus®, 1/4" Drive 114–115, 117–119, 130–131, 628
TORX®, TORX Plus®, 3/8" Drive 150–151, 155–156, 168, 178–179
TORX®, TORX Plus®, 1/2" Drive 193, 195, 204, 206, 211
TORX®, TORX Plus®, 3/4" Drive ..216
Trays 85–87
Twist, 1/4" Drive 130
Twist, 3/8" Drive.....167
Twist, 1/2" Drive 204
Twist, External Drive Hex Head.. 384
Universal, 1/4" Drive.....113–117, 119
Universal, 3/8" Drive 149–152
Wrench, Aviation 426
Socket Drivers
Ball Hex, 1/4" Drive..... 119–120
Ball Hex, 3/8" Drive 157–159
Ball Hex, 1/2" Drive.....196
Clutch, 1/4" Drive 121
Clutch, 3/8" Drive.....160
Double Hex, 1/4" Drive..... 117
Double Hex, 3/8" Drive 154, 158
Double Hex, 1/2" Drive.....196
Flat Tip, 1/4" Drive 120, 133–134
Flat Tip, 3/8" Drive.....160
Flat Tip, 1/2" Drive 198
Hex, 1/4" Drive 119–120, 132–135
Hex, 3/8" Drive... 157–159, 168, 179, 181
Hex, 1/2" Drive 196, 207, 211–212
Hex, 3/4" Drive.....216–217
Hex, 1" Drive..... 224
Holder 113
Metric Hex, 1/4" Drive 119, 132, 134–135
Metric Hex, 3/8" Drive 157, 168, 179, 181
Metric Hex, 1/2" Drive 196, 211–212
Metric Hex, 3/4" Drive.....216
Mortorq®, 1/4" Drive 120
Mortorq®, 3/8" Drive 160
Phillips®, 1/4" Drive 121, 133–134
Phillips®, 3/8" Drive 160
Phillips®, 1/2" Drive 198
Polydrive Head Bolt, 1/2" Drive ..198
Pozidriv®, 3/8" Drive..... 160, 180
Screwdriver..... 120–121, 133–134, 160, 198
Set 117–120, 131–135, 155–159, 180–181, 196–197, 212
Special Purpose, Application... 120, 156, 160, 198
Stubby, 1/4" Drive 117, 119–120, 131–134
Stubby, 3/8" Drive.....157–158
Stubby, 1/2" Drive 197
TORX®, TORX Plus®, 1/4" Drive 117–119, 123, 131, 135
TORX®, TORX Plus®, 3/8" Drive 155–156, 168, 179, 181
TORX®, TORX Plus®, 1/2" Drive 195, 206, 211–212
TORX®, TORX Plus®, 3/4" Drive ..216
TORX® Tamper-Resistant, 1/4" Drive 118–119, 131, 134
TORX® Tamper-Resistant, 3/8" Drive..... 156, 179–180
TORX® Tamper-Resistant, 1/2" Drive 211–212
Triple Square, 1/4" Drive 133
Triple Square, 3/8" Drive.... 159, 180
Triple Square, 1/2" Drive 197
Universal, Hex 1/4" Drive..... 119
Universal, TORX® 1/4" Drive..... 117
Soft Face Hammers 355, 588
Software
A/C Service Center Update 619
Brake.....769, 772–773
Engine 769, 772–773
European Vehicle.....744–749, 751–758, 764
Heavy Duty Truck 769, 772–773
TPMS.....574–575
Tractor-Trailer.....765, 772–773
Transmission..... 769, 773
Soldering
Accessories.....561
Tips 560
Tools 558–561
SOLUS™
Accessories..... 758, 763
SOLUS™ Edge
Accessories.....746, 754, 758, 763
Scan Tool 746, 750
Storage..... 763
SOLUS PRO®
Accessories..... 758, 763
Storage..... 763
SOLUS Ultra®
Accessories.....754, 758, 763
Storage..... 763
Spade Bits, Bahco..... N191
Spanner Wrenches..... 274, 628
Spanner Wrenches, TOOLS@HEIGHT .. N237
Spark Plug
Boot Puller, Pliers..... 370
Extractor 370
File 371
Firing Indicator.....371
Flexible Extensions 371
Gap Gauges 680
Hole Rethreaders..... 376
Hole Tap 376
Pliers..... 370
Repair Kits 371
Socket 371–373, 420
Tools 370–373
Spark Test Screwdrivers..... 306
Special Purpose/Application
Bit Socket 120, 156, 160, 198
Cutter 335, 429
Drill Bits.....493–495
Motorcycle Tools 420–422
Pliers..... 335–337, 599
Ratchet.....142, 187
Screwdriver..... 311–313
Socket, 1/4" Drive..... 116–117, 120, 123
Socket, 3/8" Drive 153–154, 156, 166–167
Socket, 1/2" Drive.....194, 204–205
Socket, 3/4" Drive 216
Socket, 1" Drive 227

Socket, Aviation 426
Socket, Axle Nut 584–585
Socket, Ball Joint 590
Socket, Diesel 407–409, 411–415
Socket, Diesel Injector 414
Socket, Fuel Pressure Sensor .. 412, 414, 417, 544
Socket, Heavy Duty Truck ...417–419
Socket, Spark Plug 371–373, 420
Wrench, Chain 274
Wrench, High Performance, Spline . 238, 249, 251–253
Wrench, L-Shape TORX® 267, 271
Wrench, Spanners 274, 628
Wrench, Specialty Box 253–254
Wrench, Strap 274, 646–647
Wrench, Valve Persuader... 274, 427
Specialty
Aviation Tools.....423–427
Circuit Tester 520
Meter..... 534
Ratchet.....142, 18
Test Light 520
Tire and Wheel 580–587
Wrench 253–254, 425–427, 429
Specialty Tools, Industrial (see Industrial Specialty Tools), ... N151-N200
Speeder
1/4" Drive 107
3/8" Drive 143
1/2" Drive..... 188
Locking..... 188
Shank..... 315
Spicer Clutch Adjusting Tool 600
Spindle Rethreaders 375–376
Spinner Ratchet..... 106, 127, 142, 176, 187
Spline
Box Wrenches 238, 253
Combination Wrenches 249
Drive, #5 ..... 224, 228, 232
Multi- 271
Ratcheting Box Wrenches..... 238
Socket, 1/4" Drive.....N073, 116
Socket, 3/8" Drive N073, 152
Socket, 1/2" Drive..... 194, 407
Socket, 3/4" Drive 216
Socket, 1" Drive 223
Torque Adaptor 154–155, 195
Wrench 238, 249, 253
Spool Gun 554
Spoons 699
Spot Weld
Air Hammer Bits 501
Cutter 707
Drill 473
Drill Bits..... 473, 707
Welders 566
Spray Gun
Accessories..... 708–710
Detail 708
Full Size, Conventional..... 708
Full Size, HVLP..... 708
Spring Compressor
MacPherson..... 593
Valve Spring..... 664
Spring Tools 313, 689–690, 693
Spud Ratchet.....187
Square Drive
Adaptor, 1/4" Drive 109, 123, 144
Adaptor, 3/8" Drive 109, 144, 168
Adaptor, 1/2" Drive 109, 144, 190
Adaptor, 3/4" Drive 215, 217
Adaptor, 1" Drive 223–224
Adaptor, 1 1/2" Drive..... 228
Adaptor, Nonconductive, Composite 348
Adaptor, Spline Drive..154–155, 228
Heads, Torque Wrench 287
Squares 681
S-Shaped Box Wrenches..... 254
Stainless Steel Tools, Aviation ... N081
Stainless Steel Tops 72
Stand
Jack 601, 603–604
Shop Manual..... 93
Standard Gages, Starrett N200
Starrett N194-N201
Angle Meter N198
Basic Electronic Tool Set N194
Bore Gages, Dial.....N197
Brass Pin Punches N200
Caliper & Micrometer Tool SetsN194
Calipers N195
Center Gages.....N200
Clamps & V-Blocks..... N198
Combination Square & Protractor ... Sets..... N201
Contact Point Set..... N196
Depth Gages N196
Dial Calipers.....N195
Dial Indicators..... N196-N197
Dividers N200
Drill Gages N198
Drive Pin Punches.....N200
Edge Finders N199
Height Gages N197
Inside Micrometers.....N195
Levels..... N198
Magnetic Base Indicator Holders N197
Micrometers..... N194-N197
Micrometers, Tubular..... N196
Miter Gages N198
Parallels N198
Pin Punches N200
Pin Vises..... N199
Pitch Gages..... N199
Precision Measuring Tool Set.. N194
Protractors..... N198
Radius Gage Set N200
Screw Pitch Gages N199
Scribers..... N198
Shaft Alignment Clamps.....N200
Small Bore Gages N199
Standard Gages.....N200
Steel Rules.....N200
Straightedges N201
Tap Wrenches..... N199
Taper Gages N199
Telescopic Gage Sets N199
Thickness Gage Stock N199
Trammel Heads N200
V-Blocks N198
Vernier Calipers.....N195
Wire Gages.....N200
Starter
Current Ammeter 513
Punches.....351–353
Remote Control.....614
Steel Rules N200, 682
Steel Stamping Sets.....353
Steering Wheel
Lock Plate Depressor 393
Pivot Pin Puller 393
Pullers..... 393
Step
Drills 495
Plates 717
Stools..... 95
Stethoscopes
Electronic..... 530–531
Mechanic's 531
Stones, Brake..... 576
Stools, Work..... 95
Storage
Box, Metal 70, 95
Box, Plastic 68–69
Bulk Storage Cage N031
Cabinet, End, Classic Series 48
Cabinet, End, EPIQ Series..... 20
Cabinet, End, Heritage Series 55
Cabinet, End, Masters Series..... 32–34
Cabinets, Equipto N294
Cabinet, Wall..... 69
Cabinets, Flammables..... 711
Case, Parts..... 68
Combinations..... 10–55
Diagnostic Tools . 763, 770–771, 774
Drawer..... 68–70
Drawer Sections, EPIQ Series 19
Drawer Sections, Heritage Series 54
Lockers, Classic Series..... 48
Lockers, EPIQ Series 20
Lockers, Heritage Series 55
Lockers, Masters Series 35–36
Lockers, TUVs..... 37–39

Overhead Cabinet, EPIQ Series ... 20
Overhead Cabinet, Masters Serie 32
Roll Cabs, Classic Series 44–46
Roll Cabs, EPIQ Series..... 10–17
Roll Cabs, Heritage Series 50–52
Roll Cabs, Masters Series..... 24–29
Top Chests, Classic Series..... 47
Top Chests, EPIQ Series 18
Top Chests, Heritage Series...52–54
Top Chests, Masters Series ...30–31
Straightedges, Starrett..... N201
Strap Wrench..... 274, 646–647
Striking
Prybar 330–331
Scraper..... 365
Strut 593
Stubby Bit Sockets
Hex..... 119–120, 132–133, 157–158
Phillips® 133
TORX®..... 117, 131
Triple Square..... 133, 197
Stud
Gun 566
Remover 386–387
Suction Cups, Body.....702, 704
Suction Cups, Valve..... 663
Suction Gun, Oil.....651
Supplies, Cleaning..... 95
Surface Drive Sockets, 3/8" Drive..169
Surface Drive Sockets, 1/2" Drive . 207
Suspension Strut Tools..... 593
Swiss Needle Files 364
Swivel
Ball Extension 154
Ball Universal Joint 121, 162, 199, 217, 224, 228
Connector, Air 505
Extension.....162
Socket, 1/4" Drive.....122
Socket, 3/8" Drive 165–166, 371–372
Socket, 1/2" Drive..... 204, 417
Swivel Head Ratchets 104, 141
Swivel Sockets
1/4" Drive 122
3/8" Drive..... 165–166, 371–372
1/2" Drive..... 204, 417
System Analyzers, A/C 617–618

T

TPMS Tools..... 574–575
T-Shape, L-Shape Wrenches 266–268, 270–271
Tables, Transmission..... 652
Tach, Advance Timing Light.....535
Tachometers..... 534
Tailpipe Tools 367, 591
Talon Grip™ Pliers..... 334, 336–337
Tamper-Resistant
Bit 327
Bit Socket 118–119, 131, 134, 156, 179–180, 211–212
Screwdriver.....310
Wrench 267, 271
Tap Socket.....381–382
Tap Wrench..... 382
Tape Measures..... 682
Tape Rules..... 682
Tapered Reamer..... 496
Taps and Dies
Rethreading 374–376
Self Aligning 380–381
Threading 378–382
Techwrench 278
Telescoping Gauge Set 675
Telescoping Mirrors 685–686
Telescoping Pick-up Tools.... 683–684
Temperature
Adaptor 514
Probe.....514
Terminal
Brush 614
Cleaner..... 614–615
Crimpers..... 343–344
Tool, Battery 614–615
Tool, Computer, Wiring.....536–537
Tool, Soft Grip 537
Tool, Wire.....536–537
Test Equipment
Battery System..... 607–611
Circuit.....519–523, 628
Force Testing..... 294, 298
Fuel System..... 544
Fuse 522
Ignition..... 551
Injector Harness 545
Test Lights 519–520, 628
Torque 294–300
Test Gauges, Micrometer 675
Test Leads 514–517, 521, 753, 760
Test Lights.....519–520, 628
Tester
Automotive Relay..... 534
Battery Systems 610–611
Circuit..... 518–520, 523, 628
Cooling.....631–634
Injection Harness 545
Oxygen Sensor 527, 762
Lights, Test 518–520, 628
TPMS..... 574–575
Trailer Harness 523
Tethers & Wristbands, TOOLS@ HEIGHT N214-N215
T-Handle, T-Shape
Screwdriver.....315
Sliding, 1/4" Drive 107
Sliding, 3/8" Drive.....143
Sliding, 1/2" Drive 188
Sliding, 3/4" Drive.....214
Sliding, 1" Drive..... 223
Sliding, 1 1/2" Drive 227
Speed Drivers, 1/4" Drive ...128, 176
Speed Drivers, 3/8" Drive...128, 176
Speed Drivers, 1/2" Drive 210
Torque Wrench 283
Wrench 266–268
Wrench, Ratcheting Box 239
Wrench, Threading 382
Thermal Vacuum Switch Sockets .. 662
Thermometer
Digital 627
Hydrometer.....615
Infrared 532–533
Pocket 627
Thickness Gage Stock, Starrett N199
Thin Wall Impact Sockets
1/2" Drive..... 203, 418
3/4" Drive 220, 418
1" Drive 227
Thread
Chasers 375–376
Files 375
Gauge..... 376
Pitch Gauge 378–379, 381–382, 681
Restoring.....374–376
THUNDERBIT® 490
Tie Rod
Adjusting Tools 592
Separators..... 590
Socket..... 593
Timing
Gauge, Diesel..... 407
Lights..... 422, 535
Tools 653–654, 658, 661
Tin Snips.....698
Tip Drill 496
Tire, Wheel Tools.....576–588
Tire
Aviation Inflators and Gauges..... N116
Balancer, Plates 571
Bead Breakers..... 573, 587
Changer.....422, 570,572
Changer, Accessories..... 570, 573
Depth Gauge..... 422, 579
Hammer, Mallet.....571
Inflator 576
Pressure Gauges 576–578
Pressure Monitoring 574–578
Rack N295
Spreader, Motorcycle.....421
TPMS Tools 574–575

Tread Depth Gauge 422, 579
Valve and Stem Tools 575, 579
Tire Changers 422, 570,572
Tire Rack N295
Tongs, Fuse 536
Tool Control, Industrial N003-N050
Automated Keyless Entry..... N038
Bulk Tool Storage..... N031
Foam Tool Control Kits..... N030
Heritage & Classic Keyless Entry..... N032
Industrial Maintenance Tool Sets.... N012
Laser Engravers..... N048
Level 5 System Overview N006
Master Series Keyless Entry ... N034
Metric Set Building N020
Portable Tool Storage..... N042
Safety Drawer Tool Storage N050
Snap-on Industrial Kitting Capabilities N026
Specialized Tool Sets N007
TCMax N036
Tool Control Set Building..... N024
U.S. Set Building N014
Visual Keyless Entry..... N028
Tool Control Board..... 396
Tool Control Kits..... 88
Tool Holders 84–88
Tool Sets & Custom Kitting, Industrial (See Tool Control, Industrial), ... N003-N050
Tool Control Set Building Program N024-N025
Tool Storage
Accessories..... 38–40, 68–98
Accessories, TUV 38–40
All Weather, Tool Box 62
Aviation “Dog Boxes” 63
Bags, Soft Sided..... 71, 506
Boxes, Small 68–70
Bulk Tool Storage Cage N031
Cabinet Locks.....95, 98
Carts 57–60, 64–66, 564
Casters 98
Classic Series..... 44–48
Cleaning Supplies 95
Combinations..... 10–55
Covers 37–40, 59, 61, 64–65, 74–75
Customization 78–82
Detent Kits..... 97
Drawer Dividers.....91–93
Drawer Latches..... 97
Drawer Section, EPIQ Series 19
Drawer Section, Heritage Series . 54
Drawer Slides..... 97
End Cabs, Classic Series 48
End Cabs, EPIQ Series..... 20
End Cabs, Heritage Series 55
End Cabs, Masters Series..... 32–34
EPIQ Series 10–20
Foam Organizers, Diagnostics 745, 747, 749, 751, 756, 763, 770, 774
Heritage Series.....50–55
Lights 59, 82–83, 93
Lock Assemblies..... 98
Lockers, Classic Series..... 48
Lockers, EPIQ Series 20
Lockers, Heritage Series 55
Lockers, Masters Series 35–36
Maintenance 95, 97–98
Masters Series 24–36
Mats.....40, 73, 96
Metal Boxes 70, 95
Mobile Solutions 57–66
One Drawer at-a-time System . N050
Overhead Cabinets, EPIQ Series..20
Overhead Cabinets, Masters Series.....32
Parts Trays 90, 93–94
Plastic Boxes..... 68–69
Portable Tool Storage, Industrial N042-N047
PowerCab™ End Cabinet..... 34
Road Chest.....61–62
Roll Cabs, Classic Series 44–46
Roll Cabs, EPIQ Series..... 10–17
Roll Cabs, Heritage Series 50–52
Roll Cabs, Masters Series..... 24–29
Roll Cabs, Reference Chart 6
Roll Carts 57–60, 64–66, 564
Silhouettes, Magnetic..... 89
Top Chests, Classic Series..... 47
Top Chests, EPIQ Series 18
Top Chests, Heritage Series...52–54
Top Chests, Masters Series ...30–31
TUV (Tool Utility Vehicle) 37–40
Work Surfaces 72–73
WorkCenters, EPIQ Series..... 20
WorkCenters, Masters Series.....31
WorkStation Accessories..... 37–40
WorkStation Risers, Classic Series.....48
Tool Utility Vehicles (TUV) 37–40
Tools@Height And Safety . N203-N250
1/4" Drive Ratchets, Sockets, & Accessories..... N220-N223
3/8" Drive Ratchets, Sockets, & Accessories..... N224-N227
1/2" Drive Ratchets, Sockets, & Accessories..... N228-N230
3/4" Drive Ratchets, Sockets, & Accessories.....N231
1000v Tools..... N208, N244-N245
Adjustable Wrenches N236
Buckets N219
Chain Wrenches N237
Chisel Holder N243
Combination Wrenches . N232-N233
Double-Box Wrenches....N233-N235
Files N242
Flashlights & Worklights N243-N250
Gloves N250
Grease Gun N243
Hacksaw N242
Hammers N239
Holsters & Pouches N216-N217
Hub Hatch Tool N208
Lanyards & Anchor Straps..... N212-N213
Level..... N243
Master Tools@Height Sets..... N206-N207
MechanixWear® Gloves..... N250
Pelican Safety Lighting N249
Pipe Wrenches N234
Pliers..... N240-N241
Pouches.....N217
Scaffold Builders Tools N209
Scrapers N242-N243
Screwdrivers N238
Spanner Wrenches N237
Specialized Tools@Height Sets..... N208
Tape Measure..... N243
Tethers & Wristbands..... N214-N215
Tool Belts & Safety Buckets N218
Torque Wrenches..... N238
Universal Attachment Points N246-N247
Utility Knife..... N243
Williams Safety Knives N248
Wrenches..... N232-N238
Top Chest
Classic Series..... 47
EPIQ Series 18
Heritage Series.....52–54
Masters Series 30–31
Torches
Butane Soldering.....561
Welding 554–556
TORQOMETER® Wrenches 281–284
Torque
Acquisition Meter 295
Adaptor 154–155, 195, 419
Adjustable Bodies 277, 286
Angle Gauges.....284, 422
Calibrator..... 296–299
Comparator..... 300
Digital Tester..... N154, 294-299
Controltech Aluminum .. N074-N075 277
Driver 284–285

Electronic 293
Electronic Calibrator 296–299
Electronic Testers 294, 296–299
Electronic Wrenches 293
Filter, Regulator, Lubricator 301
Hydraulic N124-N125
Joint Rate Simulator Adaptors ... 299
Multiplier Motor 293
Multipliers 292–293
PTQ Wrenches & Accessories N126, 301
QC Series 286
QD Series 279–280, 286
Reaction Arms 301
Screwdrivers 285
Sticks 580
TechAngle® 276
Techwrench® 278
Tester N154, 294–299
Torqometer® 281–284
TQ Series 280–281
TTC Series 297
Versatest™ 296
Versatorq® 295
Versatorq1® 295
Weights and Trays 299
Wrenches ... 276–283, 286, 293, 301
Wrenches, TOOLS@HEIGHT N238
Wrenches, Pneumatic & Accessories . N126, 301
TORX®, TORX Plus®
Bits 319–322, 324–327
Bits, Ratcheting, Screwdriver Sets .. 316–317
Bits, Sets 113, 319–322
Bit Socket, 1/4" Drive 117–119, 123, 131, 135
Bit Socket, 3/8" Drive 155–156, 168, 179, 181
Bit Socket, 1/2" Drive 195, 206, 211–212
Bit Socket, 3/4" Drive 216
Driver 168, 408
Impact Sockets, 3/8" Drive 166
Impact Sockets, 1/2" Drive 204
Miniature 308, 310
Mini-Tip Screwdrivers 308, 310
Screwdriver 308–311
Socket, 1/4" Drive 114–115, 117–119, 130–131, 628
Socket, 3/8" Drive 150–151, 155–156
Socket, 1/2" Drive 193, 195, 206, 211–212
Socket, 3/4" Drive 220
Tamper Resistant, Bit 327
Tamper Resistant, Bit Socket 118–119, 131, 134, 156, 179–180, 211–212
Tamper Resistant, L-Shape Wrench 267, 271
Tamper Resistant, Screwdriver ... 310
Universal, 1/4" Drive 115
Universal, 3/8" Drive 151
Wrenches, Box 253, 598
Wrenches, Folding Sets 269
Wrenches, L-Shape 271
Wrenches, T-Shape 267
Tote Bags 71, 506
Tote Trays 69
Touch-up Paint 97
TPI Digital Meters & Test Equipment .. N272-N274
Traffic Batons N116
Trailer Testers, Lights and Brakes . 523
Training Manuals 740
Trammel Heads, Starrett N200
Transducer 298, 745, 747, 749, 751, 753, 756, 759
Transducers
Diagnostic 298, 745, 747, 749, 751, 753, 756, 759
Torque 298
Transfer Punches 353
Transmission
Bushing, Oil Seal Pullers and Driver 599
Drain Plug Socket 599
Filler 649
Jacks 604
Oil Cooler Line Disconnect Tool . 598
Oil Pressure Gauge Set 598
Pump Puller 600
Seal, Bushing Installers and Removers 599
Service Set 598–600
Snap Ring Pliers 599
Software 769, 773
Tables 652
Tools 598–600
Trays
Service, Under Hood 66
Sliding 94
Socket 85–87
Torque 299
Tote 69
Tread Depth Gauges 422, 579
Trim Pad Removers 700–702
Triple Square Bit Sockets 133–134, 159, 197, 583
Trouble Lights 640–643
Truck Brake Tools 417, 691–695
Truck, Heavy Duty 417–419
T-Shape Hex Wrenches 266–268
T-Shape Wrenches 266–268
Tube
Bender 368
Cutter 368
Flaring 368
Tune-up Tools 550–551
Tweezers 561
Twist Sockets
1/4" Drive 130
3/8" Drive 167
1/2" Drive 204, 581
External Drive Hex Head 384

U

US Set Building Program 431–435
Ultra-Violet Leak Detectors ... 621–623
Universal
Bit Socket 323, 348
Joint, 1/4" Drive 109, 128, 145
Joint, 3/8" Drive 109, 144–145, 162, 168, 177
Joint, 1/2" Drive ... 109, 145, 190, 210
Joint, 3/4" Drive 215, 217
Joint, 1" Drive 224
Joint Press 589, 600
Joint Set 109, 145, 190, 199
Joint Tools 585, 589, 596, 600, 650, 656
Socket, 1/4" Drive 113–117, 119
Socket, 3/8" Drive 149–152
Socket, 1/2" Drive 193
Valve Core Service Tool 628
U.S. Postal Service Tool Sets N011
U.S. Set Building N014
Universal Attachment Points, TOOLS@HEIGHT N246-N247
Utility
Knife N193, 360–362
Knife, TOOLS@HEIGHT N243
Lights N248, 641–642
Stands 603
Vehicle, Tool Utility (TUV) 37–40
USB Power Unit 458

V

V-Blocks, Starrett N198
Vacuum
Adaptor 496
Handheld 726
Portable Spotter 727
Pressure Gauge 541
Pumps 542, 619, 625, 686
Sandblaster 713
Wet, Dry 727
Valve
A/C 626, 628
Adjuster Socket 419
Adjuster Wrench 419

Adjusting Tools 662, 679
Air 506, 709
Brushes 663
Camshaft, Crankshaft Tools..... 663
Compressors 664
Core 575, 579, 626, 628
Cover Bolt Socket 662
General Service 662–665
Guide Service Tools 501, 663
Holders..... 663
Keeper Tools 663
Lifters..... 664
Persuader 274, 427
Persuader Wrench N159
Removers..... 321, 663
Service Tools..... 662–665
Spring Depressors..... 664
Spring Replacement 665
Stem Seal Pliers 663
Vantage PRO™
Accessories..... 759–761, 763
Storage..... 763
VANTAGE® Ultra Accessories 745, 759–761, 763
Scan Tool 745, 750
Storage..... 763
VERDICT™
Accessories..... 753, 758–761, 763
Scan Tool 748, 750
Storage..... 763
Vernier Calipers, Starrett N195
VersaTest™ 296
VersaTorq® 295
VersaTorq1® 295
VERUS®, Accessories..... 752, 758–761
VERUS® PRO
Accessories..... 749, 751, 759–761, 763
Scan Tool 749–750
Storage..... 763
Vibro Gun 424
Video Scopes..... 528–530
Vinyl Covers
Air Tool, Boots..... 488
Equipment, A/C Recycling, Recharging 619
Equipment, Battery Charger 607–608, 610
Equipment, Smoke Machine..... 524
Equipment, Welding Cable 556
Motorcycle Gas Tank..... 421, 670
Seat and Fender 670
Tool Storage, Combinations... 74–75
Tool Storage, Road Chests..... 61, 75
Tool Storage, Roll Carts 75
Tool Storage, TUV (Tool Utility Vehicle) 37–40
Vise
Bench..... 715–716
Forged 716
High Visibility..... 715
Jaw Caps 716
Machinist's 715
Mechanic's 715
Pipe and Bench 715
Utility 715
Visual Keyless Entry Tool Control . N028
Voltage Adaptor..... 513
Voltage Sensor 523
Volt-Ohm Meter 748–749

W

Wall Cabinets..... 69
Waste Oil Drains 652
Water Pump Socket 657
Water Spray Nozzle 724
Waveform Demonstration Tool 759
Wax 95
Weatherhead Sockets 154, 194
Weight
Hangers, Trays 299
Sets..... 299
Welding
Cart 60, 564
Clamps 564–565
Creeper..... 671
Dent Pullers 452, 566–567
Gas Welding Kits 558
Gloves, Sleeves 558
Goggles 558
Helmets 562–563, 729
MIG 553–555
MIG Welder Consumables 555
Muscle MIG, MIG Welder Accessories..... 554–555
Plasma Cutter.....557
Spot 555, 566
Stud Gun Dent Puller 566
TIG, TIG Accessories..... 555–556
Torches, Flexible Neck.....554
Wellhead End Effector Sockets N159
WERA Aviation Tool N080-N081
Wet Sleeve Puller 408
Wet, Dry Vacuums 727
Wheel
Alignment Tools.....589–593
Axle Nut Socket 584–585
Balancer 422, 569–570
Balancer Pin Plates..... 571
Balancing Accessories 569, 571
Balancing Equipment 422, 569–570
Bead Breakers..... 573, 587
Bearing Packers 651
Budd Wheel Tools..... 587
Calibration..... 298–299
Chock 588
Cut Off 452, 478–479, 498
Cutter, Piston Service..... 666
Cutter, Power Tool Accessories 498
Cutter, Tubing 368
Dollies..... 603
Dresser..... 740
Flap 497–498
Flip Socket 581–582
General Service Tools..... 588
Grinding 496–499
Hangers..... 583
Hub Lock Tool..... 585
Hub Puller.....595
Hub Removal Adaptor 595
Lock Socket..... 583
Lug Nut Sockets 226–227, 417–418, 581–583
Pan..... 588
Pin Plate Sets..... 571
Puller..... 393
Rim Tools..... 588
Seal Driver 667–669
Shackle Pin..... 586
Socket 420, 581–587
Spanner Socket..... 584
Stud Kit 587
Tools 576–588
Torque Tools.....580, 583
Weight Cabinet..... 571
Weight Hammer..... 571
Weight Pliers..... 571
Wire 497, 739
Williams Hydraulic Tools.... N135-N142
Williams Industrial Tools
15°-60° Open End Wrenches... N164
3/4" Drive Tools and Socket Sets.... N173
Adjustable Construction Wrench N171
Adjustable Wrenches N169-N171
Bit Set N176
Bottle Jacks.....N139
Chain Wrenches N175
Construction Wrenches N171
Extractor Set N177
Flare Nut Wrenches.....N139
Flat Body Cylinders and Sets .. N140
Hammer Wrenches N172
High Visibility Combination Wrenches..... N165
Hydraulic Accessories.....N142
Hydraulic Cylinders..... N136-N138
Hydraulic Maintenance Sets N139
Hydraulic Pumps N135-N136
Hydraulic Sets..... N136-N137
Job Site Boxes N162
Lightweight Prybars.....N177
Pipe Chain Tongs.....N175

Pipe Wrenches N174
Presses..... N141
Ratcheting Combination Wrenches . N166-N167
Ratcheting Flare Nut Wrenches.. N168
Scaffold Ratchet N228
Service Wrenches N163
Sledge Hammers N178-N179
Spreaders N141
Structural Wrenches N171-N172
Toe Jacks..... N140
Wilton/Jet Fleet Maintenance Tools N286-N288
Ball-Pein Hammers, Unbreakable Handles N179-N180
Belt & Disc Sander..... N287
Bench Grinders N287
Carts, Service..... N288
Drill Press N287
Horizontal Bandsaws N286
Pallet Trucks N288
Safety Sledge Hammers N180
Service Carts..... N288
Sledge Hammers, Unbreakable Handles N179-N180
Soft Face Hammers, Unbreakable Handles N180
Vertical Bandsaws N286
Wind Power Service Sets N013
Window
Holder 704
Removal Tools 704
Sash Tool..... 704
Scrapers 704
Windshield
Removal Tools 704
Tools 704
Wiper Remover 704
Wire
Brush 497, 551, 615, 738
Crimper 343–344
Cutter 343–344, 423, 588
Feed Welders..... 553–554
Feed Welders, Accessories 554–555, 564
Gauge Drill Bits 492
Wire Gages, Starrett..... N200
Looper Pliers..... 341
Safety..... 424
Stripper 343–344
Terminal Kit..... 537
Terminal Tool..... 537
Twisters, Cutters..... 423
Wheel..... 497, 739
Wire Gauge Drill Bits 492
Wire Gages, Starrett N200
Wireless Printer 527, 611
Wobble
Bit 324
Extensions, 1/4" Drive..... 108
Extensions, 3/8" Drive 144
Extensions, 1/2" Drive..... 189
Wood Chisels, Bahco..... N192
Wood Tops..... 72
Work
Bench 652, 717
Centers, EPIQ Series 20
Centers, Masters Series 31
Gloves 558, 732–735
Stations, Classic Series..... 48
Stools..... 95, 673
Surface, Tool Storage..... 72–73
Workbenches..... N292-N293, 652, 717
WorkCenter
Accessories..... 93–95
EPIQ Series 20
Masters Series 31
WorkStation
Accessories..... 93–95
Mobile 57
Riser, Classic Series..... 48
Wrecking Bar 332
Wrench
Adaptors, Ratcheting 237
Adjustable 272–274
Adjustable, Crowfoot 261
Adjustable, Oil Filter 646–647
Adjustable, Spanners..... 274, 628
Adjustable, Strap..... 274, 646–647
Adjustable, Valve Persuader ...N159, 427
Adjustable Wrenches, Combination / Pipe, Bahco N186
Adjustable Wrenches, Insulated, Bahco N183
Air Compressor..... 409
Aluminum .. 256, 272–273, 277, 285
Angle Head 256, 410
Antenna..... 706
Aviation, Socket 426
Ball Hex 266–267, 269–270
Battery Terminal 614–615
Box, Combination 234–237, 241–249
Box, Double 238–240, 249–254
Box, High Performance 251–252
Box, Nonconductive Ratcheting 349
Box, Ratcheting 238–240, 261
Box, Ratcheting Combination 234–237
Box, Ratcheting Crowfoot..... 261
Box, Ratcheting Double.... 238–240
Box, Ratcheting Flex Head 236–237, 241
Box, Ratcheting High Performance 238
Box, Ratcheting Spline..... 238
Box, Ratcheting T-Handle 239
Box, Specialty 253–254
Box, Spline 238, 253
Box, Striking 263–264
Box, Torque Interchangeable Head 287–289
Box, Tubular..... 265
British Standard 248
Caster Camber..... 591
Chain, Strap 274
Combination 234–237, 241–249
Combination, Flare Nut 257
Combination, Flex-Combination 237, 248
Combination, Hex, TORX®..... 269
Combination, Ratcheting Box 234–237
Combination, Spline 249
Combination, T-Shape, L-Shape..... 266–267
Crowfoot –1/4" Drive 258
Crowfoot –3/8" Drive..... 258–261
Crowfoot –1/2" Drive 261–262
Distributor 550
Double End 254, 257
Fan 409, 411, 415
Fan Clutch, Cooling..... 634–635
Fan Clutch, Diesel..... 409, 411, 415
Flank Drive®, Flank Drive® Plus, Adjustable 272
Flank Drive®, Flank Drive® Plus, Combination ..234–235, 241–248
Flank Drive®, Flank Drive® Plus, Flare Nut..... 257
Flank Drive®, Flank Drive® Plus, Flare Nut, Crowfoot, 1/4" Drive ... 258
Flank Drive®, Flank Drive® Plus, Flare Nut, Crowfoot, 3/8" Drive ... 258–261
Flank Drive®, Flank Drive® Plus, Flare Nut, Crowfoot, 1/2" Drive 261–262
Flank Drive®, Flank Drive® Plus, Flex Head.....248
Flank Drive®, Flank Drive® Plus, High Performance...238, 251–252
Flank Drive®, Flank Drive® Plus, Offset Box..... 249–252
Flank Drive®, Flank Drive® Plus, Open End Crowfoot..... 258, 260, 262
Flank Drive®, Flank Drive® Plus, Ratcheting Box..... 234–235, 238
Flank Drive®, Flank Drive® Plus, Specialty Box 253–254

Flank Drive®, Flank Drive® Plus, Striking/Slugging..... 263–264
Flare Nut..... 257, 258, 260, 262
Flare Nut, Crowfoot... 258, 260, 262
Flare Nut, Torque Interchangeable Head 291–292
Flat..... 634
Flex Head, Combination 237, 248
Flex Head, Ratcheting Box.. 237, 241
Four Way..... 256
Fuel Filter..... 412, 544
Fuel Pump..... 409, 425
Governor Gap..... 410–411
Half Moon 253
Headlight..... 707
Heavy Duty..... 263–265
Heavy Duty, Impact..... 467–468
Hex, Combination T and L-Shape 266–267
Hex, Ratcheting..... 420
High Performance..... 238, 251–252
Ignition..... 255
Impact, Air 464, 466–470
Impact, Cordless 445, 447–449, 453, 456
Impact, Electric 460
Injector..... 409
L-Shape 266–267, 269–271
Latch-on®..... 240
Midget..... 237, 248, 250
Multi-Spline 271
Nonconductive 349
Oil Filter..... 412, 425, 646–647
Open End..... 254–257
Open End, Combination ... 234–237, 241–249
Open End, Crowfoot..... 258–262
Open End, Flare Nut Combination ... 257
Open End, Flex Combination.... 237, 248
Open End, Ratcheting Box..... 234–237
Open End, Spline..... 249
Open End, Torque Interchangeable Head 290–291
Open End, Tubular 265
Organizer..... 87–88
Persuaders, Valve..... 274, 427
Pipe..... 272, 427
Pliers..... 273
Push Rod 411
Radiator Cap 630
Railroad..... 301, 429
Ratcheting, Open End 234–237
Ratcheting Box, A/C Service 628
Ratcheting Box, Battery Terminal.... 615
Ratcheting Box, Combination 234–237
Ratcheting Box, Crowfoot..... 261
Ratcheting Box, Double Box 238–240
Ratcheting Box, High Performance . 238
Ratcheting Box, Nonconductive 349
Ratcheting Box, Spline..... 238
Ratcheting Box, T-Handle 239
Ratcheting Box, Torque Interchangeable Head..... 287
Refrigeration 628
S-Shape..... 254
Serpentine Belt 412, 658
Set 234–264
Slimline 255, 272
Spanners 274, 628
Special Purpose, Application..... 274
Specialty 253–254
Spline..... 238, 249, 253
Stands..... 268
Strap 274, 646–647
Striking 263–264
Swivel..... 647
Tamper-Resistant 267, 271
Tap 382
T-Handle, T-Shape 239, 266–268
T-Shape, Hex..... 266–268
T-Shape, TORX® 267
TOOLS@HEIGHT N232-N238
Torque 276–286, 293, 301
Torque, Pneumatic..... 301
TORX®, TORX Plus®, Box 253, 598
TORX®, TORX Plus®, Folding Sets..... 269
TORX®, TORX Plus®, L-Shape.... 267, 271
TORX®, TORX Plus®, T-Shape..... 267
Tubular 265
Turbo, Diesel..... 413
Vacuum Pump 425
Valve Adjuster 419

XYZ

X4, Multipliers..... 293
Zephyr Aviation Tools N082

TOOL CONTROL.....N003

Specialized Tool Sets Small Arms Repair, Radioman, USPS, Portable Mechanic's, General Mechanic's, Wind Power, General Industrial Maintenance	**N007-N013**
Set Building Program U.S. Set Building, Metric Set Building, Tool Control and Keyless Entry Set Building	**N014-N027**
Level 5™ Tool Control Systems Visual, Bulk, Networkable, Automated Keyless Entry, Tool Control & Hardware	**N028-N041**
Portable Tool Cases All Weather Mobile Tool Chest, Sentinel® & Pelican® Cases, One Drawer at a Time	**N042-N047**
Laser Engravers, One Drawer at a Time	**N048-N050**

AVIATION TOOLS.....N051

Aviation Tool Sets Military, Commercial, Aircraft Overhaul, Engine Overhaul, Master Mechanical Set, Basic Mechanic's, All Purpose Mechanic's, Flight Line Mechanic's, Basic Maintenance Tool	**N054-N067**
Aviation Tool Storage Dog Boxes, Flight Line Roll Cabinets	**N068-N069**
FOD & FME Prevention FOD Hand Tools, Aeroprobe®, and STARK Kit	**N070-N071**
Snap-on Aviation Specialty Hand Tools Hi-Lok® Ratchets, Spline Sockets, Ctech Aluminum Torque Wrenches	**N072-N075**
Aerospace Standard Hand Tools Ratchets, Sockets, Drive Tools and Accessories, Wrenches	**N076-N079**
WERA & Zephyr Aviation Specialty Hand Tools Bits and Bit Sets, Stainless Steel Tools, Hi-Lok® and Jo-Bolt Tools	**N080-N082**
ATI Airframe Tools Rivet Sets, Rivet Squeezers, Micro Stops, Bucking Bars, Vacuums, Angle Drills, Deburring Tools	**N083-N113**
Aviation Air Tools Snap-on and Sioux Air Drills, Angle Drills, Rivet Shavers, Skin Clamp Runner	**N114-N115**
Specialty Aviation Equipment Tire Service Tools, Traffic Batons, Digital Inspection Kit	**N116-N117**
Mastic Removal Tools Nyroc®, XNGL, and CELCON® Scrapers and Accessories	**N118-N120**

INDUSTRIAL POWER TOOLS.....N121

Hydraulic Torque Wrenches and Pumps 3/4" Drive thru 2-1/2" Drive Wrenches, Air and Electric Pumps	**N124-N125**
Pneumatic Torque Wrench Accessories Reaction Arm Kits, PTQ Wheel Accessories & Kits	**N126**
Snap-on and Sioux Air Drills and Screwdrivers Reversible and Non-Reversible Production Drills, Positive Clutch, Adjustable Clutch, & Stall Drive Screwdrivers	**N127-N130**
Sioux Industrial Heavy-Duty Die Grinders, Wheel Grinders, Scalers, and Impact Wrenches	**N131-N134**
Williams Hydraulics Combination Sets, Pumps, Cylinders, Maintenance Sets, Bottle Jacks, Toe Jacks, Flat Body Cylinders and Kits, Spreaders, Shop Presses, Accessories, Hydraulic Oil	**N135-N142**
ENERPAC Hydraulics Combination Sets, Cylinders, Pumps, Shop Presses, Maintenance Sets, Flange Alignment Tools and Spreaders, Industrial Spreaders, Nut Splitters, Hydraulic Cutters, Self-Contained Cutters	**N143-N150**

INDUSTRIAL SPECIALTY TOOLS.....N151

Industrial Finish Hand Tools Crowfoot Wrenches, Screwdrivers, Digital Torque Checker	**N154**
Snap-on Railroad Specialty Tools Track Tools, Locomotive Tools, Car Shop Tools, Signal Tools, Bridge and Building Tools	**N155-N158**
Snap-on Utility Specialty Tools Sockets, Manhole Cover Removal Tool, Ratchet Wrench, Adaptors	**N159**
Snap-on Power Generation Industry Capabilities	**N160-N161**
Williams® Job Site Boxes, Service Wrenches, High Visibility Combo Wrenches, Ratcheting Combination Wrenches, Flare Nut Wrenches, Adjustable Wrenches, Construction Wrenches, 3/4" Drive Sockets & Sets, Pipe and Chain Wrenches, Sledge Hammers	**N162-N179**
Wilton® BASH™ Hammers	**N179-N180**
Bahco Tools Insulated and Standard Screwdrivers, Pliers, and Cutters, ergo® Adjustable Wrenches, Holesaws and Recip Blades, Knives and Chisels	**N181-N193**
Starrett® Precision Tools Micrometers, Calipers, Dial Indicators, Depth Gauges, Height Gauges, Protractors, Levels, Pin Vises, Combination Squares Sets	**N194-N201**

TOOLS@HEIGHT & SAFETY.....N203

Tools@Height Tool Sets Master Sets, Hub Hatch Kit, Scaffold Builder's Kit	**N206-N211**
Tethering Lanyards, Carabiners, Tethers, Wristbands, Holsters, Pouches, Buckets, and Miscellaneous Tools	**N212-N219**
1/4" Drive Retention System Tools Ratchets, Handles, Extensions, Adaptors, Sockets, Crowfoot Wrenches	**N220-N223**
3/8" Drive Retention System Tools Ratchets, Handles, Extensions, Adaptors, Sockets, Crowfoot Wrenches	**N224-N227**
1/2" Drive Retention System Tools Ratchets, Handles, Extensions, Sockets, Crowfoot Wrenches	**N228-N230**
3/4" Drive Retention System Tools Ratchets, Handles, Extensions, Sockets	**N231**
Hand Tools Wrenches, Screwdrivers, Hammers, Pliers, Prybars, Scrapers, 1000v Tools	**N232-N245**
Universal Attachment Points D-Rings. Tape, Quick Spins	**N246-N247**
Safety Products Williams Safety Knives, Safety Approved Flashlights, Pelican Remote Area Lighting System, Gloves	**N248-N250**

FLEET MAINTENANCE....N251

Shop & Service Equipment Challenger Lifts, Pro-Cut Lathes, John Bean Alignment & Service Lifts, Deployable Mobile Column Lifts, Collision Service Equipment, Tire Changers, Brake Lathes, Alignment Equipment, and Wheel Balancers, Pro-Link iQ™ Diagnostic Scan Tool, Trailer Diagnostics, Military NATO Battery Chargers, KrankingKART, ShopKey Repair and Information System	**N254-N271**
TPI Electronic Measuring Instruments HVAC Gas, Pressure, and Airflow Test Equipment, Thermometers, Leak Detectors, Test Meters, Probes	**N272-N274**
CamSpray Pressure Washers	**N275**
COXREELS Retractable Air, Water, and Electric Hose and Cord Reels	**N276-N277**
Columbus McKinnon Material Handling Electric Chain Hoists, Load Binders, Manual Chain Hoists, Beam Clamps, Trolleys, Chain, Slings	**N278-N282**
Omega and Hein-Werner Hydraulics Floor Jacks, Wheel Lift System, Truck Air Jacks, Jack Stands, Air Bottle Jacks, Truck Ramps, Shop Press, Engine Stands, Engine Cranes	**N283-N285**
Wilton/JET Shop Equipment Horizontal and Vertical Bandsaws, Belt Sander, Bench Grinders, Drill Press, Pallet Trucks, Service Carts	**N286-N288**
Build-a-Bay Modular High Density Tool Storage	**N289-N290**
Equipto V-Grip™ Shelving, Workcenters, Work Benches, Storage Cabinets, Tire Racks	**N291-N295**

Snap-on Industrial Customer Service Center

United States

To place an order:
U.S. Federal Government customers
Phone: 888-418-5600
Fax: 888-418-5900
Email: contractsales@snapon.com

All other industrial customers
Phone: 877-740-1900
Fax: 877-740-1880
For more information, contact your Snap-on Industrial account manager
Email: order@snapon.com

United States

Hours of operations:
Monday – Friday 7 am CT – 6pm CT
Snap-on Industrial
P.O. Box 9004
Crystal Lake, IL 60039

Subsidiary and International

See pages G3 and G4 for a complete listing of sales offices.

www.snapon.com/industrial

CRITICAL INDUSTRIES SPAN THE GLOBE. SO DO SNAP-ON SOLUTIONS.

Snap-on is a trademark of Snap-on Incorporated. © 2014-2015 Snap-on Incorporated. All Rights Reserved.

CAT1300i

Printed in U.S.A.