




# *Side & Twin- Rotary Mowers*

**Twin Rotary**



**Side rotary**

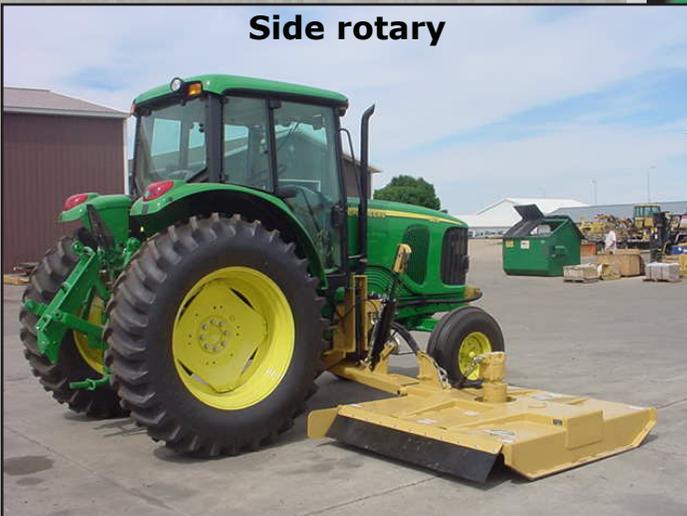



## Side Specifications

- Cutter width - 60" or 72"
- Tri-Hex Power Dish standard
- Cutter knives - two, and up to six 1/2" full swinging heat-treated suction knives
- Cutter head weight - 60"/1,050 lbs.
- Lift controls - two single acting hydraulic cylinders
- Spindle shall be one piece 4340 steel, mounted in straight FAG roller bearings
- Spindle for power to cutting assembly shall be 6-1/2" in diameter at its largest area x 13" longer, with bearing areas of 2.755" with a minimum of 4-1/2" between bearing centers
- Spindle shall be direct-coupled with splined threaded end
- Minimum spindle speed is 1,200 RPM for 60", 1,000 for 72"
- Main control valve - non restrictive, electric brake, with starter lockout switch
- Hydraulic filter - in tank 75 gpm rated, 25 micron element with restriction gauge
- Hydraulic pump - steel gear type 98 hp rated
- Hydraulic motor - steel gear type rated at 133 hp

## Rear Specifications

- Cutter type - rear rotary offset to right side
- Cutter width - 60" actual cut
- Three point hitch mounting Category II
- Cutter head weight - 1,600 lbs.
- Hydraulic cooler is forced air type
- Hydraulic pump - tandem front mounted steel gear, rated at 187 hp
- Rear cutter head tilt 15 degrees, hydraulically adjustable
- Dual caster wheels standard - casters 360 degree with adjustable cushion
- Standard equipment includes front chain guard, rear rubber guard

## Total cutting widths:

- 120" total cut - 60" side with 60" rear deck
- 132" total cut - 72" side with 60" rear deck



## Options

Chain guards



## Diamond Mowers, Inc.

27134 Parklane Drive • Sioux Falls, SD 57106  
 Toll-Free: (800) 658-5561  
 (605) 368-5865  
 Fax: (605) 498-1222  
 www.diamondmowers.com  
 Email: info@diamondmowers.com

**The Leader In Integrated Roadside Vegetation Management**