Details Specification Guide

Availability

Electronic price list updated with release 182.A (U.S.) and 147.A (Canada), dated April 20, 2015.

Spec News is available on village.steelcase.com. Search AdStock and download the current release's Spec News.

View or download Steelcase Specification Guides at http://www.steelcase.com/en/resources/design/ spec-guides/pages/specguides.aspx.

Transitional products in this specification guide are **maintained for existing customers only** and are likely to be phased out over time. These products are indicated with a **1**. Products that are scheduled to be culled are indicated with an **1**, followed by the last order entry date.

Working With This Specification Guide

Ten Tips: How to Get the Most Out of This Book	2
Additional Resources	4

Understanding and Specifying

Organizational Worktools	5
Victor2	71
Lighting	81
Computer Support Tools	107
Height-AdjusTable Worksurfaces	239
Height-AdjusTable Series Benching	361

Surface Materials	441
Resources	449

 For a list of all trademarks, refer to the last page of this specification guide.
 © 2015 Steelcase Inc.




For Canadian Pricing

Canadian factor can be found at steelcase.com/CADpricing. Calculate in the following order to avoid rounding errors:

- Multiply the base price and each option by the Canadian factor.
- Round each to the nearest dollar.
- · Add base and options for total list price.

Ten Tips: How to Get the Most Out of This Book

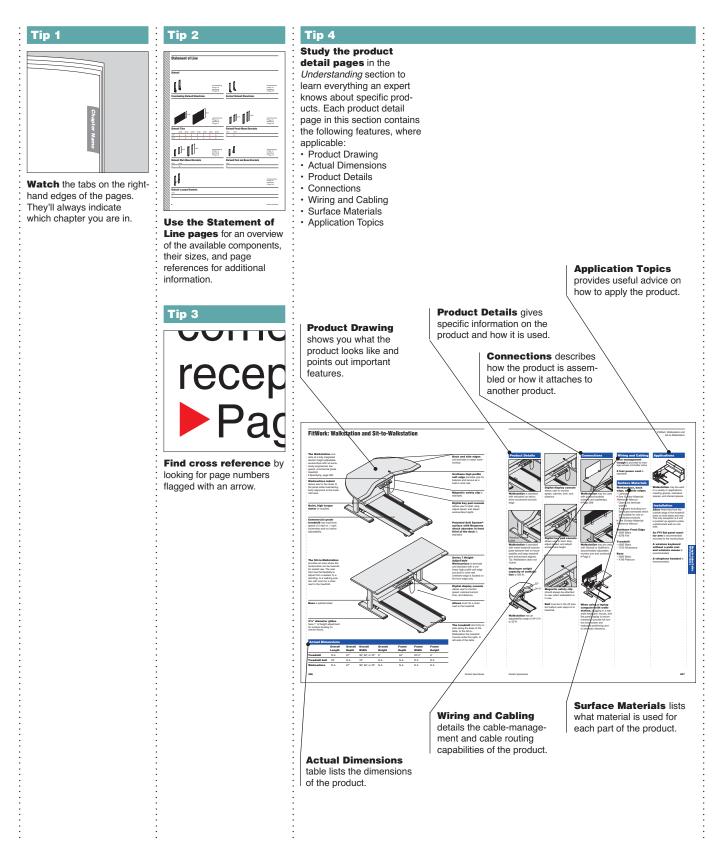

lip 5				Tip 6		Tip 10	
efer to the specify				: Slatwall	з÷		
ages for all the inform				. Slatwall	:	: Style : Number	Page
n needed to order a p t. Each product specif				Freestanding Slatwall Stanchions	- :	1710EF	128
ge contains a variety				For Use on Workstrikors 37 1s 3 Thox Standard Includes Need help? • Pair of Sizewit; pairs Product details, • Non-maring ubber feet	:	1810EF	
ements to help you co	m-			- page 14	:		128
ete a specification:				Type Positions top of Statwall a face finished roll adove mounting surface mounting surface	:	19AM00	132
Product Drawing Standard Includes				Ty: Sume can overlang stanchors up to 12" Ty: Worksurface table must Ty: Worksurface table must be able to support 60 b. State St		19AMGG	132
Required to Specify				Tij: Stanchion cannot be 2" 2" 2" 16" WFCS \$134 used in a comer application or on a glass surface.	1:	19MD00	131
Options				 Tig: Requires 14*0 worksur- face and uses 2* suffice footprint. 	_ :	19MDGG	131
Related Products				: Italic typeface on speci	- :	Refer to the st	tvle
Specification Informati	on			fying pages usually identified		number index	,
Style Number				 wording that you should us in your order. 	e :	know a style num	
Price					÷	you need to find t that has more def	
				:	:	the product.	ialis about
				Tip 7	÷	Page 452	
	Standard Include			taces with a P-edge as it is	- :		
	(under the dark grey t			: applied to the front edge	:		
	provides a list of what comes standard with		Specification Information (under the	i only.			
	product.	uie	light grey band) provides	: Tip: Eyesite arms should only be mounted to c:scape	:		
Product Drawing			product dimensions, style	desks that are tethered to			
hows you what the	Required	o Specify	numbers, and prices for the	 either the beam, another worksurface, or 1¹/₂"H low 	:		
roduct looks like.		ark grey band)	standard product and any	· · storage with a connect zone			
		information that	surface material choices that are available.		:		
		ovide to order		: Monitor cables that : connect to the rear of the	:		
	preferred se	product and the		•	_ ;		
	specification			: Watch for tips through-	;		
				 out the text that give you explanations and helpful 	:		
latwall			Saturi	· instructions.	;		
				-	÷		
restanding Slatwall Stanchions ar bar on Worksurfaces 197 to 5° thick		Slatwall Tiles	Boundard Instructor		;		
Standard Includes Need help? - Pair of Staneal: paint Product details, - Non-maring nubber feet page 14	Required to Specify 1 Spin number 2 Paint color number for stateall brackets: 0825 Black	Tip: Total dimensione of Workscole specified should not exceed Statual dimensions.	Standards includes Process for a participation Standard file: part Paint carbon or annual file: Paint carbon or annual file: Color Pattern	Tip 8	÷		
Belated Products	4350 Champagne 4359 Plathum	Tip: Statwall is not dedicated to the exact panel width; a 12° ownhang is acceptable.	4750 Champagne Related Products		; []		
feed height of 1510° above - Statuul ties config auton. (c. Statuul can overhang - Social fictuation Information	►Page 17	Tg: Teo Statual lies cannot be used in a corner application. Ta: Ties require a minimum	Catavall brackets Fage 18 Forestanding Stanual stanchions Fage 16 Stanual and StarPail workbools Page 20		:		
anchons up to 12" Dimensions Style U.S. p: Worksurfacetable must able to support 60 b.		worksurban depth of 18" for stability. Tip: A clearance of 2" is			:		
x Sanchian cannot be 2° 310° 16° W+CS 3134 ed in a corner application or a giana sattica. x Requires tPD worksur-		to accommodate o clamp. Tg: Ties cannot be used on glass, bulnose, knile adge, Specificatio	n Information		:		
ice and unes 2° surface oppint. (p: Freestanding Stateau)		ar other han-standard work- surface edges. Dimensions D W Tip: Supports up to 60 b.	-Style -U.S. H Number Price	· · X	:		
PH time only.		12"H Tiles	12° W\$34 5100 12° W\$36 5121		:		
Standard Includes	Required to Specify	17 - 26' 17 - 42' 17 - 42'	12" W506 \$104 12" W542 \$167 12" W545 \$160		:		
 Preschago - Par of suman stachoore p Product details, page 14 	2 Paint color number for statewall brackets: 0626 Black 4750 Champagne 4799 Platnum	52° 44° 52° 60°	12° W548 \$179 12° W560 \$224		:		
The must be 10° shores The must be 10° shores rescen unit if utilizing rescent unit is subport • Statual tiles	► Page 17	18"H Tiles 114" - 24" 114" - 20"	1P WS2416H 5226	Monitor arms and sup-	' :		
enhand bis and shelves. S Context Statust state- tis only. Specification Information Concensions Style -U.S. D W N Number Price		1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1 1	12" WS2616M 2010 12" WS2616M 2020 12" WS2616M 2020 12" WS2616M 2021	Learn what you canno	t		
0 W H NUMBER PHCs No. 2' 16' WBSXS 579		114" 44" 114" 44" 114" 46"	11" WIAADIW 2011 11" WIAADIW 201 11" WIAADIM 501	: do by looking for drawings			
				: crossed out with an "X."			
Canadian Pricing Idea Strange Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea Idea	\	For Canadian Pricing Multiply U.S. Price by the Canadian price factor.		:	:		
ere pager 1 nr. Olfäblik.	Details Spectruits	 see page 1 tor details. Details Specifiede 	•Statwall, continued 17	Tip 9			
	\				:		
	\			Use the surface	:		
				: materials listings in the : Surface Materials section of			
0	\.		-4-	this book to find surface	' '		
Options (under the b		Related Produ		: material color numbers.	:		
		nformation for pro		: ► Page 441	:		
		hat are directly re		:	;		
	ired to specify.			•	:		
·	· -			:	;		
				:	•		
				•	•		
				•	:		

Additional Resources

Details products are

supported with informational

- materials, tools, and soft-
- ware to help you plan,
- specify, and order an installation efficiently.

Product brochures and planning tools can be

- ordered through your Steelcase area office by
- calling 1.800.784.0358
- or through the AdStock web
- site at village.steelcase.com.

Details Photo Catalog is available to download product images at either medium or high resolution at no charge. Photos can be found at

village.steelcase.com.

Printed Materials

Surface Materials Reference Manual

This publication provides surface material information for Steelcase and Turnstone products:

- An explanation of the surface materials
- "Available on" matrices Vertical surface
- fabric selection listing • Technical data for
- surface materials
- Surface material care
- and cleaning instructions

Other Specification Guides

Steelcase offers a comprehensive portfolio of furniture and solutions. For the full offering of products, refer to the individual product specification guides. These can be accessed at the www.steelcase.com web site or at village.steelcase.com.

Planning Tools

Quick Ship Guide

This handbook describes all Steelcase, Turnstone, Details, and Coalesse products that are available for Rapid2 (ships in 2 days), Rapid5 (ships in 5-7 days), or Coalesse Rapid10 (ships in 10 days).

: Mock-Ups

Mock-ups are available for dealers to order single units at a nominal cost to show as samples. Contact the Steelcase Solutions Fulfilled Team (SFT) at 888.783.3522. Use village.steelcase.com to look up Reps by Regional Assignment.

Computer Tools

Electronic Catalog Accurate sales quotations

and purchase orders for Steelcase products are created with specification software that uses Steelcase Electronic Catalog data. Use the data to specify and price style numbers and options for every Steelcase product. The data is updated bimonthly by Steelcase and provided to software programs including: the Hedberg Business System. SmartTools - Steelcase's design and specification software (for more information on SmartTools, please email SmartTools@steelcase.com, the ProjectMatrix ProjectSymbols libraries, as well as 20-20 CAP Studio.

Electronic Data Interchange

Through the Electronic Data Interchange (EDI), Dealers and Details can engage in two-way electronic communication. The EDI service is established through a thirdparty network that can be set up quickly and easily. The most commonly used forms are already available on the system. To learn more about EDI, contact Hedberg support at 860.758.9010.

Details Website

For online product information, a full library of downloadable brochures, research documents, videos, news articles, and contact information. www.steelcase.com/details

Furniture Symbol Graphic Data

Steelcase creates 2D and 3D furniture symbols (with attributes) for planning and initially specifying Steelcase products. This data is incorporated into several add-on software packages that work in either a Microstation or an AutoCAD drafting environment.



Digital Publications

If your device has a bar code reader App, scan this QR code for a direct link to the online digital publications. Utilizing this QR code allows you to search across multiple specification guides, share across social media, or print out pages. You can also access these digital publications at www.steelcase.com or village.steelcase.com.

Product Training

Basic training for many Steelcase products is part of the Building Product Muscle (BPM) curriculum on the Steelcase University Web site at village.steelcase.com.

More Information

For more information about these and other software tools to help you plan effective healthcare environments, email fsl@steelcase.com.

Support

Steelcase Capabilities

Steelcase products are distributed, installed, and serviced through a network of more than 600 dealers worldwide. Steelcase is also represented with offices and corporate showrooms in 26 U.S. cities, 4 Canadian cities, and in France, Germany, Great Britain, and Japan. Every Steelcase product meets our exceptionally high standards of quality and durability and comes with the Steelcase assurance of excellence in service

For assistance, please

call your local dealer, the Steelcase Solutions Resource Team, or the Steelcase Solutions Fulfillment Team at 1.888.STEELCASE (1.888.783.3522) or send an e-mail to info@details-worktools.com.

Call the Steelcase Solutions Resource Team prior to placing an order, when working on a bid, or when you need information about product applications and specifications.

Call the Steelcase Solutions Fulfillment Team if you have submitted an order to Steelcase and you need to speak to your Solutions Fulfillment Team Representative about the order. Also call if you have any post-shipment quality or warranty concerns or service parts questions.

Outside the U.S.A., Canada, Mexico, Puerto Rico, and the U.S. Virgin Islands, call 1.616.247.2500.

For information about Steelcase, the name of your nearest Steelcase dealer, or for product literature, call 1.800.333.9939 or visit our Web site: www.steelcase.com.

Details Lineone

For all questions including product specification and application information call the Details support line at 888.783.3522, Option 1 for lineone, Option 7 for details, or email info@details-worktools.com.

Specials


To adapt an existing Details product or develop a totally unique concept, contact Specials. For application information or to specify a product, submit a request on village.steelcase.com using the Specials RFQ E-Quote process. Please note: To ensure accurate pricing and timely delivery, a valid quote number is required on every order.

Organizational Worktools




Slatwall	
Understanding	14
Specifying	16
SlatRail	
Understanding	20
Specifying	22
Slatwall, SlatRail, and Freestanding Wo	rktools
Understanding	26
Specifying	32
SOTO Worktools	
Understanding	44
Specifying	49
SOTO II Worktools	
Understanding	56
Specifying	60
Steelcase Divisio Side Screen	
Understanding	66
Specifying	67
Steelcase Fixed Personal/Modesty Scre	ens
Understanding	68
Specifying	70

Statement of Line

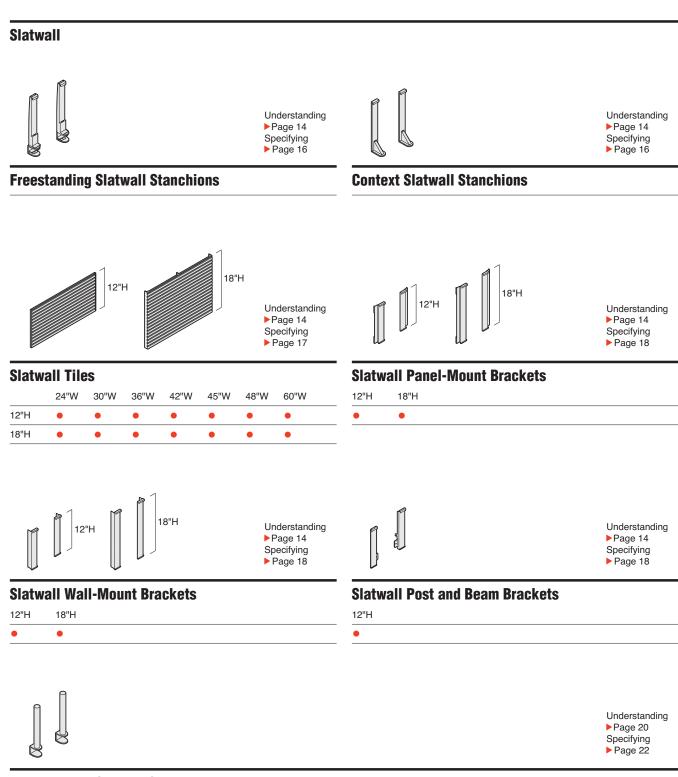

Freestanding SlatRail Stanchions

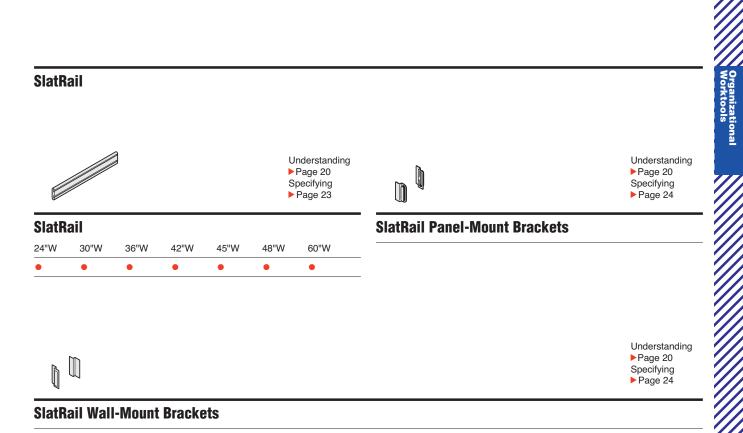

Statement of Line, continued





10" Portrait Letter Tray Understanding ▶ Page 26 Specifying Page 32



Universal Shelves Understanding ▶ Page 27 Specifying ▶ Page 34



Mini Shelf Understanding Page 28 Specifying ▶ Page 36



Understanding Page 29 Specifying Page 38



Utility Hook Understanding Page 30 Specifying Page 40



12" Landscape Letter Tray Understanding ▶ Page 26 Specifying ▶ Page 32



Hanging Brackets Understanding ▶ Page 27 Specifying ▶ Page 34



Portrait Slatshelves Understanding ▶ Page 28 Specifying



Understanding ▶ Page 29 Specifying ▶ Page 38



Understanding ▶Page 30 Specifying Page 40



15" Landscape Legal Tray Understanding Page 26 Specifying ▶ Page 32



Binder Holder Understanding Page 26 Specifying ▶ Page 33

Double Square Dish

Understanding

Page 28

Specifying

▶ Page 35



PaperFlo Manager Understanding ▶ Page 26 Specifying ▶ Page 33



Office in a File Understanding ▶ Page 28 Specifying ▶ Page 36



Page 37



Chart/File Holder





Pen/Pencil Cup

Understanding

▶ Page 27

Specifying

▶ Page 35

Understanding ▶ Page 28 Specifying Page 37



Glove Box Understanding ▶ Page 29 Specifying ▶ Page 39



Markerboard Understanding ▶ Page 30 Specifying ▶ Page 40



Understanding Page 29 Specifying Page 37



Telephone Caddy Understanding Page 29 Specifying ▶ Page 39



Cable Rings Understanding ▶ Page 30 Specifying Page 41




Understanding Page 29 Specifying ▶ Page 38



Tackstrip Understanding ▶ Page 30 Specifying Page 39

>


Wastebasket Understanding Page 31 Specifying Page 41

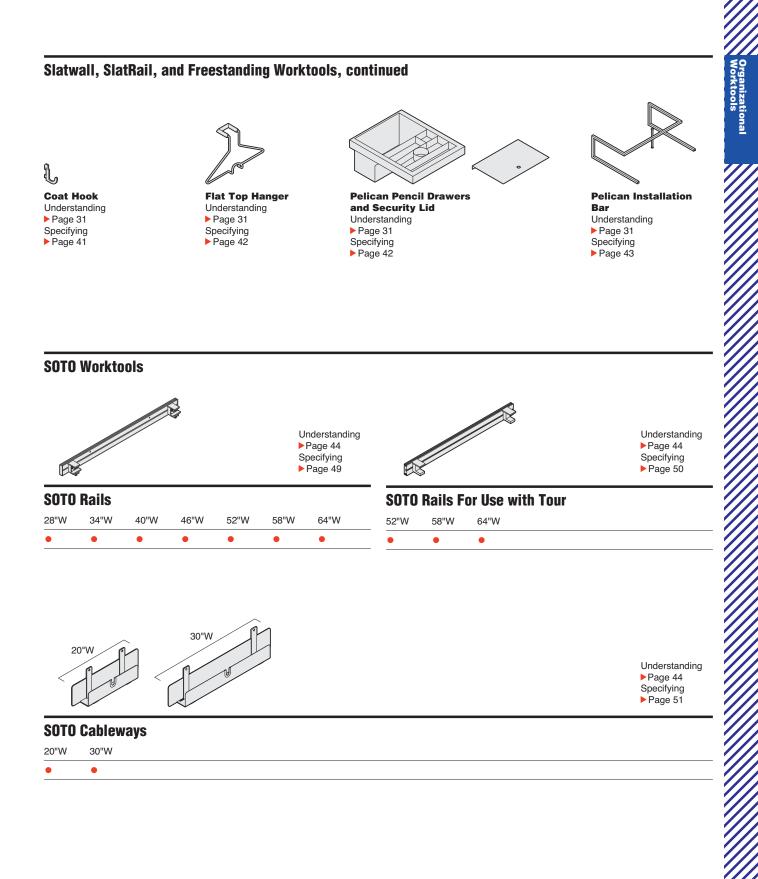

Details Specification Guide

Statement of Line, continued

SOTO Worktools, continued

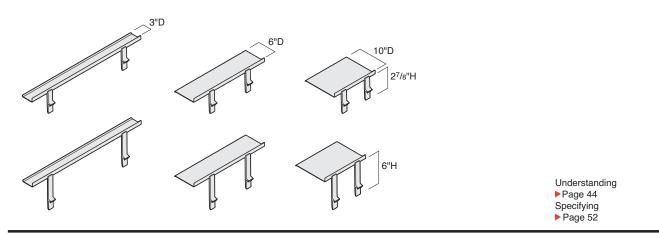

SOTO Shelves

	14"W	24"W	36"W		
3"D	•		•		
6"D	•	•			
10"D	•	•			
-					-



SOTO Pile Box Understanding ▶ Page 45 Specifying ▶ Page 53



SOTO Landscape Letter Box Understanding Page 45 Specifying Page 53



SOTO Tool Box Understanding Page 45 Specifying Page 53



SOTO Diagonal File Box Understanding Page 45 Specifying Page 54




SOTO Utility Box
Understanding
▶ Page 46
Specifying
▶ Page 54



SOTO Personal Box Understanding ▶ Page 46 Specifying ▶ Page 54



SOTO Storage Boxes Set of Three Understanding Page 46 Specifying Page 55

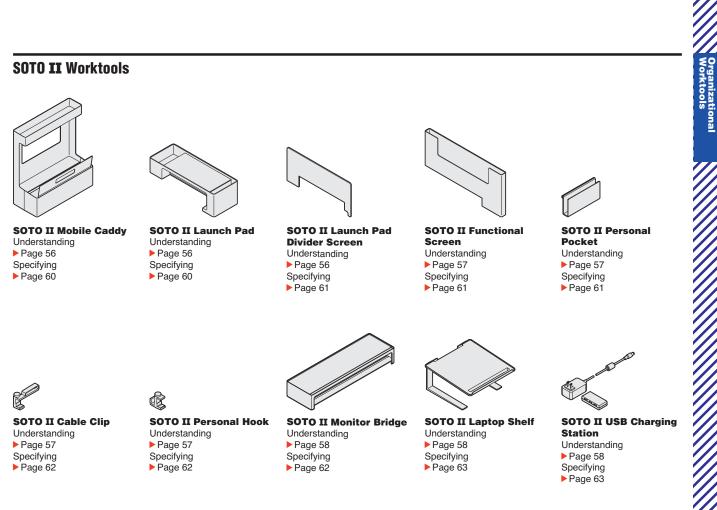




SOTO II Ergo Edge Understanding ▶ Page 59 Specifying ▶ Page 64



SOTO II Desk Pac Understanding Page 59 Specifying Page 64

Details Specification Guide

Statement of Line, continued

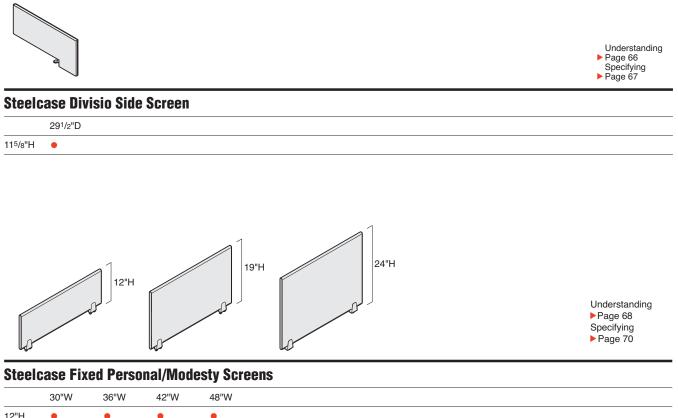



	30"W	36"W	42"W	48"W
12"H	•	•	•	•
19"H	•	•	•	•
24"H	•	•	•	•

Statement of Line

Organizational Worktools

Slatwall

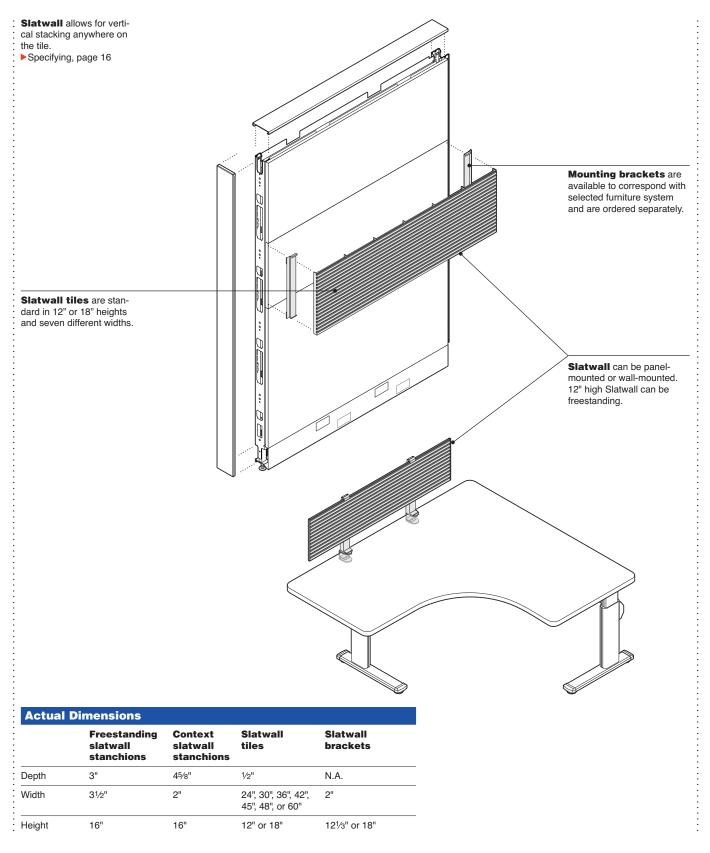

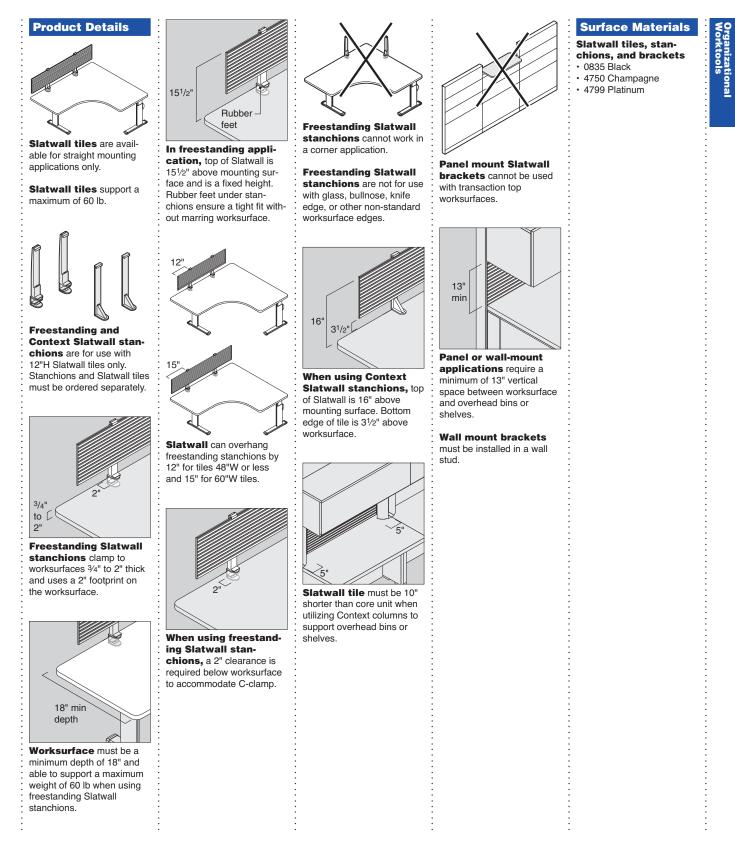

Slatwall

Freestanding Slatwall Stanchions

For Use on Worksurfaces 3/4" to 2" thick

		Standard	l Includes		Required to Specify		
	Need help? Product details, page 14	 Pair of Slatwall: paint Non-marring rubber feet 			1 Style number 2 Paint color number for slatwall brackets 0835 Black 4750 Champagne 4799 Platinum		
Tip: Positions top of Slatwall		Related	Products				
a fixed height of 151/2" above		 Slatwall tiles 		► Page 17			
mounting surface.					U U		
Tip: Slatwall can overhang		ion Informatio			-		
Tip: Slatwall can overhang stanchions up to 12". Tip: Worksurface/table must	Specificat			• U.S. Price			
mounting surface. Tip: Slatwall can overhang stanchions up to 12". Tip: Worksurface/table must be able to support 60 lb. Tip: Stanchion cannot be used in a corner application or on a glass surface.	Specificat Dimensions D W	ion Informatio	on •Style				

Standard Includes

Context Slatwall Stanchions

Tip: Freestanding Slatwall stanchion is for use with 12"H tiles only.



Tip: Tile must be 10" shorter than core unit if utilizing Context columns to support overhead bins and shelves.

Tip: Context Slatwall stanchion is for use with 12"H tiles only.

45/8" 2"

16"

3 lb

Need help? Product details, page 14	Pair of Slatv	vall stanchions: pa	aint	1 Style number 2 Paint color number for slatwall brackets: 0835 Black 4750 Champagne 4799 Platinum
	Related	Products		
	 Slatwall tiles 	3		Page 17
Specificatio	on Informatio	on		
Dimensions D W H	Weight	• Style Number	·U.S. Price	

\$85



Required to Specify

WBSXS

Required to Specify

2 Paint color number for slatwall tile:

1 Style number

0835 Black

▶ Page 18

▶ Page 16

▶ Page 32

4799 Platinum4750 Champagne

Slatwall Tiles

Tip: Total dimensions of Worktools specified should not exceed Slatwall dimensions.

► Need help?

page 14

Product details,

Tip: Slatwall is not dedicated to the exact panel width; a 12" overhang is acceptable.

Tip: Two Slatwall tiles cannot be used in a corner application.

Tip: Tiles require a minimum worksurface depth of 18" for stability.


Tip: A clearance of 2" is required under worksurface to accommodate C-clamp.

Tip: Tiles cannot be used on glass, bullnose, knife edge, or other non-standard worksurface edges.

Tip: Supports up to 60 lb.



Tip: Slatwall is 1/8" shorter than stated without end caps installed.



	ecification		Informatio	• Style	۰U.S.
D	w	н		Number	Price
1 2 "	H Tile:	s			
1/2"	24"	12"	1 lb	W\$24	\$116
1/2"	30"	12"	1 lb	W\$30	\$130
1/2"	36"	12"	1 lb	WS36	\$145
1/2"	42"	12"	1 lb	W\$42	\$169
1/2"	45"	12"	1 lb	W\$45	\$180
1/2"	48"	12"	1 lb	WS48	\$193
1/2"	60"	12"	1 lb	W\$60	\$241
			:	:	

Standard Includes

Related Products

· Freestanding Slatwall stanchions

Slatwall and SlatRail worktools

· Slatwall tile: paint

· Slatwall brackets

	•	-			
11⁄8"	24"	18"	7 lb	WS2418H	\$244
11⁄8"	30"	18"	7 lb	WS3018H	\$278
11⁄8"	36"	18"	7 lb	WS3618H	\$312
11⁄8"	42"	18"	7 lb	WS4218H	\$344
11⁄8"	45"	18"	7 lb	W\$4518H	\$378
11⁄8"	48"	18"	7 lb	WS4818H	\$414
11⁄8"	60"	18"	7 lb	WS6018H	\$447



Slatwall Brackets

Tip: Wall-mount brackets must be mounted to a wall stud.

Tip: Brackets for use with 42"H panels cannot be used with transaction top worksurfaces.

	Standar	d Includes		Required to Specify
Need help? Product details, page 14	 Pair of slatv 	vall brackets: paint		1 Style number 2 Paint color number for slatwall brackets 0835 Black 4750 Champagne 4799 Platinum
	Related	Products		
	 Slatwall tiles 	S		► Page 17
Specificati	on Informati	on		
•Dimensions W H	·Weight	• Style Number	•U.S. Price	
12"H Panel-	Mount Brac	kets		
For Use with /	Answer, Kick, a	and Privacy Wall		
2" 121/3"	2 lb	WSWANS	\$ 37	
For Use with /	Avenir and Seri	ies 9000		
2" 121/3"	2 lb	WSWUSA	\$ 37	
For Use with /	Answer and Kid	ck 42"H Panels		
2" 121⁄3"	2 lb	WSW42AN	\$ 72	
For Use with /	Avenir 42"H Pa	nels		
2" 121⁄3"	2 lb	WSW42AV	\$ 72	
For Use with §	Series 9000 42	"H Panels		
2" 12 ¹ /3"	2 lb	WSW42S9	\$ 72	
		kate		
18"H Panel-	Mount Brack	NGLƏ		
18"H Panel- Standard	Mount Brac	NG13		

2" 18" 3.5 lb **WSWANS18** \$104

: :

Specification Information, continued on next page



Organizational Worktools

Specification Information, continued from previous page

S	Specification Information				
• Di W	mensions H	Weight	• Style Number	·U.S. Price	
:				•	

\$104

Wall-Mount Brackets

12"H	Standard			
2"	12 ¹ /3"	2 lb	WSWM	\$ 37

18"H Standard

2" 18" 3.5 lb **WSWM18**


12"H Brackets For Use with Post and Beam

2" 12¹/₃" 2.5 lb **WSWPBOF12** \$104


· · · ·

Details Specification Guide

SlatRail

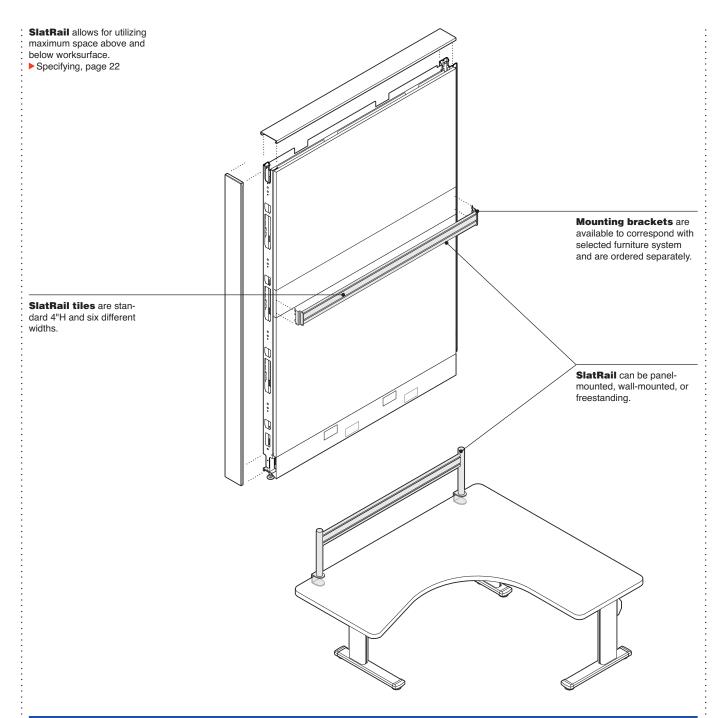

Actual	Dimensions					
	Freestanding SlatRail stanchions	Post and Beam fence interface bracket	SlatRail	SlatRail panel-mount brackets	SlatRail wall-mount brackets	
Depth	11⁄2"	4" or 10"	3⁄4"	N.A.	23⁄4"	
Width	11⁄2"	N.A.	24", 30", 36", 42", 48", or 60"	21/2"	3/4"	
Height	131⁄2"	N.A.	4"	41/2"	4 ³ /4"	:

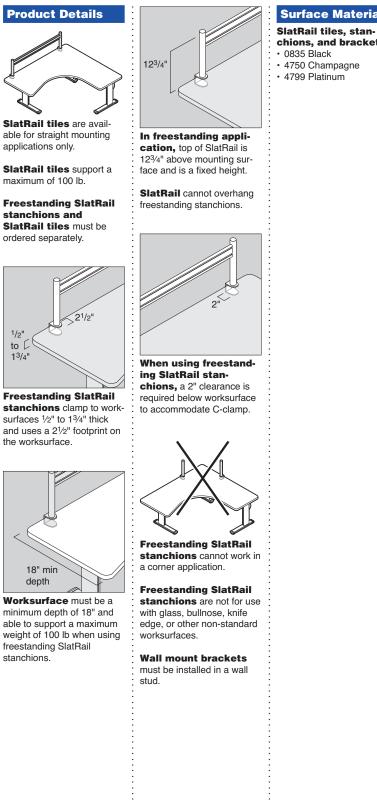

Surface Materials

- chions, and brackets

Application Topics When mounting

SlatRail with stanchions in combination with a cableway or determining appropriate SlatRail width for use with Height-AdjusTable worksurfaces, see Worktools Compatibility Charts, page 264.

SlatRail

Freestanding SlatRail Stanchions

For Use on Worksurfaces and Materials 1/2" to 13/4" thick

Need help?

page 20

Product details,



Tip: Positions top of SlatRail a fixed height of 12³/4" above mounting surface.

Tip: Worksurface/table must be able to support 100 lb.

Tip: Stanchion cannot be used in a corner application or on a glass surface.

Tip: Requires 18"D worksurface and uses 2¹/2" surface footprint.

Tip: A clearance of 2" is required under worksurface to accommodate C-clamp.

Tip: Actual width of usable SlatRail is 3¹/8" less than stated when installed using freestanding stanchions.

			Related Pr	oducts			
	• SlatRail				► Page 23		
	cifica ension		formation	• Style	∙ U.S.		
D	w	н	•	Number	Price		
1 ¹ ⁄2"	1 ¹ /2"	13 ¹ ⁄2"	4 lb	WSRFS	\$127		

Required to Specify

2 Paint color number for SlatRail

1 Style number

stanchions: 0835 Black

4750 Champagne

4799 Platinum

Standard Includes

· Pair of SlatRail stanchions: paint



SlatRail



Tip: When mounting SlatRail with stanchions in combination with a cableway, see Worktools Compatibility Charts, page 264.

Tip: To determine appropriate SlatRail with stanchions width when mounting to Height-AdjusTable worksurfaces, see Worktools Compatibility Charts, page 264.

Tip: SlatRail requires a minimum worksurface depth of 18" for stability.

Tip: Total dimensions of Worktools specified should not exceed SlatRail dimensions.

Tip: Two SlatRails cannot be used in a corner application.

Tip: Not applicable on glass surfaces.

Tip: Actual width of usable . SlatRail is 31/8" less than stated when installed using freestanding stanchions.

Tip: Supports up to 100 lb.

	Standard Includes	Required to Specify
 Need help? Product details, page 20 	• SlatRail: paint	1 Style number 2 Paint color number for SlatRail: 0835 Black 4750 Champagne 4799 Platinum

Related Products

- Freestanding SlatRail stanchions
- · SlatRail panel-mount brackets
- SlatRail wall-mount brackets
- · Slatwall and SlatRail worktools

Page 22 ▶Page 24

Page 24Page 32

• Dimensions		 Weight 	• Style	•U.S.		
D	W	H		Number	Price	
			:	:	:	
3⁄4"	24"	4"	2 lb	WSR24	\$ 68	
3⁄4"	30"	4"	3 lb	WSR30	\$ 81	
3⁄4"	36"	4"	3 lb	WSR36	\$ 93	
3⁄4"	42"	4"	3.5 lb	WSR42	\$106	
3⁄4"	48"	4"	4 lb	WSR48	\$118	
3⁄4"	60"	4"	4.5 lb	WSR60	\$144	



SlatRail, continued

SlatRail Panel-Mount Brackets

D

Tip: Answer, Avenir, Kick, Privacy Wall, and Series 9000 furniture systems accommodate the SlatRail panel-mount brackets.

	Standard Includes	Required to Specify
Need help? Product details, page 20	Pair of SlatRail panel-mount brackets: 4799 Platinum	Style number

Related Products

ication	Information				
ions	·Weight	• Style Number	·U.S. Price		
/2"	1.5 lb	WSRU1	\$39		
			2" 1.5 lb WSRU1	Number Price 2" 1.5 lb WSRU1 \$39	Number Price 2" 1.5 lb WSRU1 \$39


SlatRail Wall-Mount Brackets

Tip: Wall-mount brackets must be installed in a wall stud.

	Standard Includes	Required to Specify
Need help? Product details, page 20	Pair of SlatRail wall-mount brackets: 4799 Platinum	Style number
	Related Products	
	SlatRail	► Page 23



Slatwall, SlatRail, and Freestanding Worktools

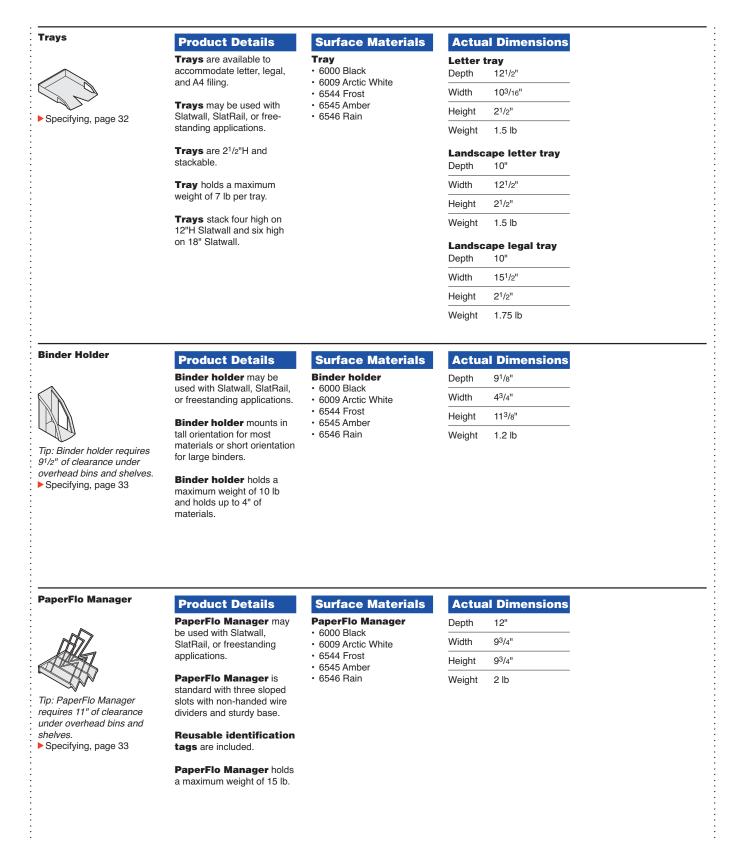

Universal Shelves	Product Details	Surface Materials	Slatwall Width	Maximum Number of Shelves
\sim	Universal shelves are sloped for storing 23/4" of	Universal shelves 6000 Black 	24"W	6
	materials.	 6009 Arctic White 6544 Frost 	30"W	9
49	Universal shelves may	• 6545 Amber	36"W	11
	be positioned vertically for letter-size material or hori-	• 6546 Rain	42"W	13
Specifying, page 34	zontally for legal-size material.	Actual Dimensions	45"W	14
		Depth 9 ¹ /2"	48"W	15
	Universal shelves are available in either a single	Width 2 ³ /4"	60"W	19
	pack or three pack.	Height 12"		
	Universal shelf holds a maximum weight of 7 lb per shelf.	Weight 0.5 lb		
Hanging Brackets	Product Details	Surface Materials	Actual Dimen	sions
	Hanging brackets are	Hanging brackets	Depth 9 ³ /4"	
(Calabase)	solid and four stepped for displaying hanging files. Hanging brackets are	 6000 Black 6009 Arctic White 6544 Frost 6545 Amber 	Width 1 ¹ /2"	
			Height 1 ¹ /4"	
	not recommended for use on stanchion-mounted brackets mounted on SlatRail.	• 6546 Rain	Weight 1 lb	
Tip: Hanging brackets are recommended for use in pairs only. Brackets should not be shared with mounting multiple brackets side by side. Specifying, page 34	Hanging brackets require 6" clearance from top step of bracket to access files under bin and 9" clear- ance from the bottom step to allow files to hang freely.			
Pen/Pencil Cup	Product Details Pen/Pencil cup is 2 ^{3/8"} in	Surface Materials	Actual Dimen	sions
\diamond	diameter.	6000 Black6009 Arctic White	Width 3 ¹ /4"	
		• 6544 Frost	Height 3 ⁵ /8"	
		 6545 Amber 6546 Rain 	Weight 0.5 lb	
Specifying, page 35			110.g.n 010 12	

Details Specification Guide


Slatwall, SlatRail, and Freestanding Worktools, continued 27

Double Square Dish	Product Details	Surface Materials	Actual Dimensions	
	Double square dish may be used with Slatwall, SlatRail, or freestanding applications.	Double square dish • 6000 Black • 6009 Arctic White • 6544 Frost • 6545 Amber • 6546 Rain	Small square Depth 2 ⁷ /8"	
Specifying, page 35			Width 2 ⁵ /8"	
			Large square Depth 2 ⁷ /8"	
			Width 5 ⁵ /8"	
			Outside dimensions Depth 4"	
			Width 9 ³ /4"	
			Height 1 ¹ /2" Weight 0.5 lb	
Office in a File	Product Details Office in a File may be	Translucent cover may be used as a writing surface.	Surface Materials Office in a File	Actual Dimensions
	used with Slatwall, SlatRail,		• 6000 Black • 6009 Arctic White	Width 12 ¹ /4"
	hanging brackets, or free- standing applications.		• 6544 Frost	Height 1 ³ /8"
▶ Specifying, page 36	Office in a File is portable and standard with seven compartments and translucent cover.		• 6545 Amber • 6546 Rain	Weight 1.5 lb
	Office in a File is stan- dard with built-in tape dispenser.			
Mini Shelf	Product Details	Surface Materials	Actual Dimensions	
	Mini shelf organizes small personal technology items.	Mini shelf • 6000 Black	Depth 10" Width 8"	
Specifying, page 36	Mini shelf indents in back to allow mini cable to pass through.	 6009 Arctic White 6544 Frost 6545 Amber 6546 Rain 	Height 1 ⁷ / ⁸ " Weight 0.5 lb	
	Mini shelf holds a maxi- mum weight of 5 lb.			
SlatShelves	Product Details	SlatShelf supports larger office phone or equipment.	Surface Materials	Actual Dimension
	12"W and 18"W Slat- Shelves mount on Slatwall or SlatRail. 24"W shelves do not mount on 24"W Slatwall or 24"W SlatRail.	For Cisco phones, specify 12"W shelf.	SlatShelf • 0835 Black	Landscape SlatShelve Depth 10 ⁵ /8"
$\langle \rangle$		SlatShelf accommodates	4750 Champagne7018 Pewter	Width 12", 18", and 24"
\checkmark		letter, legal, and A4 filing.		Height 2 ³ /8"
/>>>	SlatShelf is standard with cable access opening.	SlatShelf accommodates SOTO freestanding boxes.		Weight 3.5 lb, 3.75 lb, and 4.75 lb
Specifying, page 27	When installing Underline light, shelf should be mounted 18"	SlatShelf holds a maxi- mum weight of 40 lb per		Portrait SlatShelves Depth 12 ⁵ /8"
Specifying, page 37	above worksurface. 12"W	shelf.		Width 12" and 18"
	shelf does not support Underline light.			Height 2 ³ /8"
	-			Weight 4.25 lb and 5.5 lb

SlatShelf Labels	Product Details	Surface Materials	Actual Dimensions	
	Reusable SlatShelf labels are wet-erase and ship in package quantity of three.	SlatShelf labels 6544 Frost 	Depth ⁵ /8"	
R.C.C.			Width 2"	
Specifying, page 37			Height ³ /8"	
	SlatShelf labels clip to the front edge of Slatshelf.		Weight 0.1 lb	
SlatShelf Dividers	Product Details	Surface Materials	Actual Dimensions	
~	SlatShelf dividers sup- port binders, CDs, and other	SlatShelf dividers	Depth 83/8"	
	reference materials.	• Polar Gray	Height 3"	
Specifying, page 38	SlatShelf dividers attach to back wall of Slatshelf.		Weight 0.4 lb	
Personal Shelf	Product Details	Surface Materials	Actual Dimensions	
4	Personal shelf is stan-	Personal shelf	Depth 7 ¹ /8"	
	dard with raised front edge to prevent items from falling.	0835 Black4750 Champagne	Height 13 ¹ /2"	
Specifying, page 38		7018 Pewter	Weight 3 lb	
Chart/File Holder	Product Details	Surface Materials	Actual Dimensions	
\wedge	Chart/file holder is two- tiered and for use with stan- dard letter-size materials. Chart/file holder accom-	Chart/file holder 7018 Pewter 	Depth 21/2"	
			Width 12"	
			Height 10 ¹ /2"	
Specifying, page 38	modates use with Post and Beam and Slatwall.		Weight 4.5 lb	
Glove Box				
	Product Details	Surface Materials	Actual Dimensions	
20	Glove box is for use with standard size box of exam	Glove box • 7018 Pewter	Depth 3 ¹ /4"	
	gloves or tissue box.		Width 10"	
Specifying, page 39	Glove box accommodates use with Post and Beam.		Height 3"	
	use with Post and Beam.		Weight 1 lb	
Telephone Caddy	Product Details	4³/4" clearance required to mount on Slatwall or	Surface Materials	Actual Dimensions
	Telephone caddy	SlatRail.	Telephone caddy	Depth 2"
	mounts off desktop at an optimal angle to view num-	Telephone caddy	0835 Black4750 Champagne	Width 8"
	bers and dialing.	accommodates use with	• 7018 Pewter	Height 11"
Tip: Telephone caddy is not compatible with Cisco phones.	Telephone caddy is standard with vertical chan- nel for managing telephone cable.	Post and Beam.		Weight 6 lb
Specifying, page 39				

Slatwall, SlatRail, and Freestanding Worktools, continued

Tackstrip	Product Details	Surface Materials	Actual Dimensions
	Tackstrip is a slim tack-	Tackstrip	Depth ⁵ /16"
	able surface for posting reminders or photos.	• 6000 Black	Width 15"
	·		Height 3 ¹ /8"
Specifying, page 39	Tackstrip surface is self- filling, reducing the sight of		Weight 0.5 lb
	holes from frequent use.		
Utility Hook	Product Details	Surface Materials	Actual Dimensions
	Utility hook allows hang- ing of items to free up	Utility hook • 0835 Black	Depth 1 ³ /4"
			Width 3 ¹ /2"
G	workspace.	4750 Champagne7018 Pewter	Height 2"
Specifying, page 40			Weight 0.25 lb
			Weight 0.23 lb
Nork Tags	Product Details	Surface Materials	Actual Dimensions
	Reusable work tags are	Work tags	Depth 1 ¹ /2"
	wet-erase and allow user to	• 6544 Frost	Width 2 ³ /8"
	label materials.		Height ⁵ /16"
Tip: Marker is included.	Work Tags clip to Organizational Worktools		Weight 1 lb
Specifying, page 40	and SOTO boxes.		troight the
Markerboard Tip: Markers are not included. Tip: Markerboard is not rec- ommended for use with SlatRail. Specifying, page 40	Product Details Markerboard is standard with dry-erase surface and integrated marker holder.	Surface Materials Markerboard • Dry-erase surface Frame • Aluminum	Actual DimensionsDepth1"Width173/4"Height113/4"Weight1.75 lb
Cable Rings (a) (b) (c) (c) (c) (c) (c) (c) (c) (c	Product Details Cable rings provide tech- nology cable management. Multiple cable rings organize proliferating cables. Cable rings are shipped in a package quantity of four.	Surface Materials Cable rings • 6544 Frost	Actual DimensionsDepth1"Width11/2"Height1"Weight0.25 lb

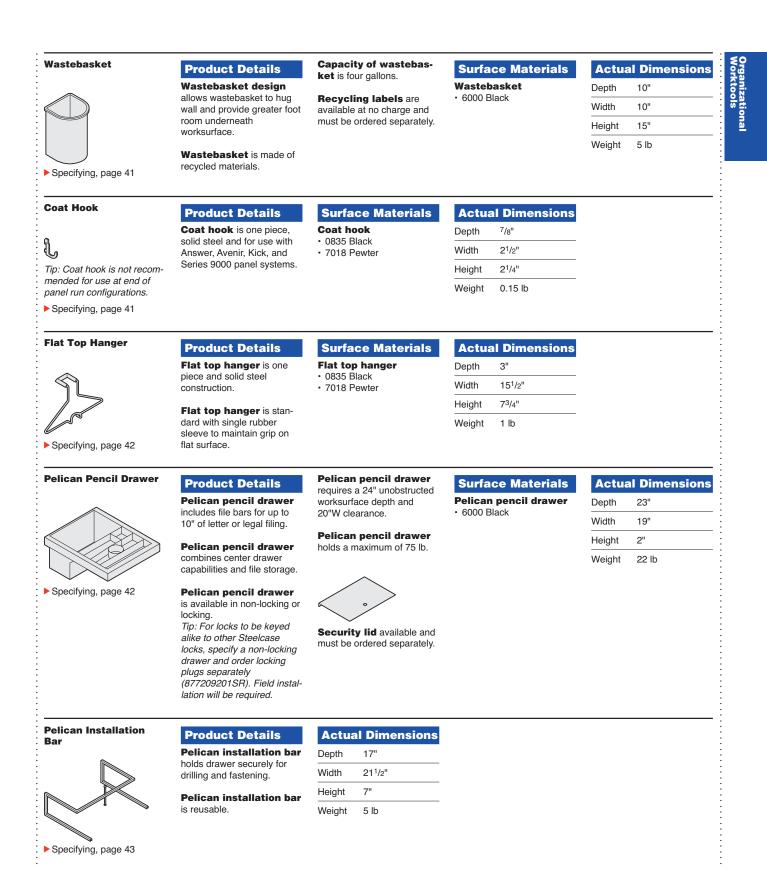


Slatwall, SlatRail, and Freestanding Worktools

Trays

Tip: Trays do not interlock when installed on slatwall

	5	Standard I	ncludes		Required to Specify
Need help? Product details, page 26		ray: plastic			1 Style number 2 Plastic color number for letter tray 6000 Black 6009 Arctic White 6544 Frost 6545 Amber 6546 Rain
	F	Related Pr	oducts		
	-	ilatwall tiles ilatRail			► Page 17 ► Page 23
Specificat Dimensions D W	ion Inf H	ormation •Weight	• Style Number	•U.S. Price	
Dimensions	н	·Weight			
Dimensions D W	н tter Tr	·Weight			
Dimensions D W Portrait Le	н tter Tr 2½"	• Weight :: ay 1.5 lb	Number	Price	
Dimensions D W Portrait Le	H tter Tr 2½" Lette	• Weight :: ay 1.5 lb	Number	Price	
Dimensions D W Portrait Le 121/2" 103/16" Landscape	H tter Tr 2½" Letter 2½"	• Weight ay 1.5 lb • • • • • • • • • • • • • • • • • • •	Number WLTS	\$37	









Organizational Worktools

Binder Holder Standard Includes Required to Specify · Binder holder: plastic Need help? 1 Style number Product details, 2 Plastic color number for binder holder: page 26 6000 Black 6009 Arctic White 6544 Frost 6545 Amber Tip: Binder holder requires 6546 Rain 91/2"H clearance under bins or shelves. **Related Products** · Slatwall tiles Page 17 ▶ Page 23 SlatRail **Specification Information** • Dimensions Weight • Style ·U.S. W н Number Price D 91/8" 43⁄4" 113⁄8" 1.2 lb **WBHS** \$37

Standard Includes

· PaperFlo manager: plastic

PaperFlo Manager



Tip: PaperFlo manager requires 11" clearance under bins. ▶ Need help?

page 26

Product details,

						6546 Rain	
Sp	ecifica	ation In	formation				
· Dim D	ension W	IS H	Weight	• Style Number	•U.S. Price		

For Canadian Pricing Multiply U.S. Price by the Canadian price factor. See page 1 for details. **Required to Specify**

2 Plastic color number for PaperFlo

1 Style number

manager: 6000 Black 6009 Arctic White 6544 Frost 6545 Amber

▶ Need help?

page 27

Product details,

Dimensions

w

11/2"

D

9³⁄4"

Universal Shelves



 Standard Includes
 Required to Specify

 Need help?
 • Shelf: plastic
 1 Style number

 Product details,
 2 Plastic color number for shelf:
 6000 Black

 6009 Arctic White
 6544 Frost
 6545 Amber

Tip: Universal shelves are not recommended for use on SlatRail.

Tip: Shelves do not interlock when installed on Slatwall.

• Dim D	ension W	s H	• Weight	• Style Number	·U.S. Price	
Sing	le Pa	ck				
9 ¹ ⁄2"	23⁄4"	12"	0.5 lb	WUS	\$22	
Thre	e Pac	;k				
9 ¹ /2"	23⁄4"	12"	1.5 lb	WUS3	\$64	

Hanging Brackets



Tip: Hanging brackets not recommended for use on stanchion-mounted SlatRail brackets mounted on SlatRail.

Tip: Hanging brackets require 6" clearance from top step of bracket to access files under bin and a 9" clearance from the bottom step to the top of worksurface to allow files to hang freely.

Tip: Hanging brackets are recommended using in pairs only. Brackets should not be shared when mounting multiple brackets side by side.



Canadian price factor. See page 1 for details.

Required to Specify

2 Plastic color number for hanging

1 Style number

brackets:

6000 Black

6544 Frost

6546 Rain

▶ Page 17

▶ Page 23

6545 Amber

6009 Arctic White

6546 Rain

Standard Includes

· Hanging brackets: plastic

Related Products

• Style

WHB

Number

·U.S.

\$37

Price

Slatwall tiles

Weight

1 lb

SlatRail

Specification Information

н

1¹/4"

Pen/Pencil Cup

1	\sim
6	>
Ť	\sim
	\cup

		Standard I	ncludes		Required to Specify
Need help? Product deta page 27	ils,	Pen/pencil cup:			1 Style number 2 Plastic color number for pen/pencil cup 6000 Black 6009 Arctic White 6544 Frost 6545 Amber 6546 Rain
		Related Pr	oducts		
	•	Related Pro Slatwall tiles SlatRail	oducts		► Page 17 ► Page 23
Specific	•	Slatwall tiles	oducts		
Specific Dimension D W	ation In	Slatwall tiles SlatRail	•Style Number	·U.S. Price	

Double Square Dish



	Standard Includes	Required to Specify
 Need help? Product details, page 28 	 Double square dish: plastic Attachment bracket 	1 Style number 2 Plastic color number for square dish: 6000 Black 6009 Arctic White 6544 Frost 6545 Amber 6546 Rain
	Related Products	

Related Products	
Slatwall tilesSlatRail	► Page 17 ► Page 23



Office in a File



Standard Includes	Required to Specify
 Storage file: plastic Built-in tape dispenser Translucent cover 	1 Style number 2 Plastic color number for storage file: 6000 Black 6009 Arctic White 6544 Frost 6545 Amber 6546 Bain
	Built-in tape dispenser

• Dimensions		 Weight 	• Style	۰U.S.	
D	W	н		Number	Price
95/8"	12 ¹ /4"	13⁄/8"	1.5 lb	WOFS	\$37

Mini Shelf



	Standard Includes	Required to Specify
Need help? Product details, page 28	• Shelf: plastic	1 Style number 2 Plastic color number for shelf: 6000 Black 6009 Arctic White 6544 Frost 6545 Amber 6546 Rain

Related Products	Related Products			
Slatwall tilesSlatRail	Page 17Page 23			

Specification Information					
Dim D	ension W	is H	·Weight	• Style Number	•U.S. Price
10"	8"	17⁄8"	0.5 lb	KMINI	\$26



Required to Specify

2 Paint color number for slatshelf:

1 Style number

0835 Black

Slatshelves

Tip: 12"W and 18"W shelves ► Need help? mount on Slatwall tiles or SlatRails.

Tip: Shelf should be mounted 18" above worksurface when installing Underline light.

Tip: 12"W shelf does not support Underline light.

Tip: 24"W shelves do not mount on 24"W Slatwall tile or 24"W SlatRail.

Tip: For Cisco phones specify 12"W shelf.





	.0					4750 Champagne 7018 Pewter	
			Related Pr	oducts			
			Slatwall tiles SlatRail			► Page 17 ► Page 23	
Spe	cifica	ation In	formation				
• Dime D	ension W	is H	·Weight	• Style Number	·U.S. Price		
Land	scap	e		·	·		
105⁄8"	12"	23⁄8"	3.5 lb	WSS12L	\$126		
105⁄8"	18"	23⁄8"	3.75 lb	WSS18L	\$130		
105⁄8" :	24"	23⁄8"	4.75 lb	WSS24L	\$145 :		
Porti	rait						
125⁄8"	18"	23⁄8"	4.5 lb	WSS18P	\$136		
125⁄8"	24"	2 ³ /8"	5.5 lb	WSS24P	\$150		

Standard Includes

Slatshelf: paint

Product details,

page 28

Slatshelf Labels



	Standard Includes	Required to Specify
Need help? Product details, page 29	Labels, package of three wet-erase: 6544 Frost	Style number

Specification Information

 Dimensions 		 Weight 	• Style	·U.S.			
D	W	н		Number	Price		
:			:	:	:		
5⁄8"	2"	3⁄8"	0.1 lb	WSSL	\$7		



Slatshelf Dividers

~~)
\sim	

		Standard I		Required to Specify		
Need help? Product details, page 29		• Pair of dividers: polar gray			Style number	
Spe	cificatio	n Information				
Dime D	ensions H	·Weight	• Style Number	•U.S. Price		

Personal Shelf



	Standard Includes	Required to Specify
Need help? Product details, page 29	Personal shelf: paint	1 Style number 2 Paint color number for personal shelf: 0835 Black 4750 Champagne 7018 Pewter

Related Products	
Slatwall tiles	► Page 17
 SlatRail 	► Page 23

Specification Information					
Dim D	ensions W	·Weight	• Style Number	•U.S. Price	
: 7½8"	131⁄2"	: 3 lb	WSPS	: \$42	
:		:	:	:	

Chart/File Holder



	Standard Includes	Required to Specify
 Need help? Product details, page 29 	Two-tier holder: 7018 Pewter	Style number

For Canadian Pricing Multiply U.S. Price by the Canadian price factor. See page 1 for details.

Glove Box



Tip: Glove box accommodates standard size tissue box.

			Standard I	Required to Specify		
Need help? • Glove box: 7018 Pewter Product details, page 29			8 Pewter		Style number	
			-			
-	ension		nformation •Weight	• Style	·U.S.	
-				• Style Number	U.S. Price	

Telephone Caddy



Tip: Telephone caddy is not compatible with Cisco phones.

Tip: 43/4" clearance required to install on Slatwall or SlatRail.

	Standard Includes	Required to Specify
 Need help? Product details, page 29 	Telephone caddy: paint	1 Style number 2 Paint color number for telephone caddy: 0835 Black 4750 Champagne 7018 Pewter

			Slatwall tiles SlatRail		► Page 17 ► Page 23			
Spo	ecific	ation Ir	nformation					
• Dim D	nensio W	ns H	• Weight	• Style Number	·U.S. Price			
2"	8"	11"	: 6 lb	WTCS	: \$91			

Related Products

Tackstrip



	Standard Includes	Required to Sp
Need help? Product details,	Tackstrip: 6000 Black	Style number
2020 00		

Specification Information								
	ension		·Weight	Style	•U.S.			
D	w	н		Number	Price			
5⁄16"	15"	31⁄8"	0.5 lb	WTBS	\$43			
			:	:	:			

For Canadian Pricing Multiply U.S. Price by the Canadian price factor. See page 1 for details.

page 30

ecify

Utility Hook

4

	Standard Includes	Required to Specify
Need help? Product details, page 30	Utility hook: paint	1 Style number 2 Paint color number for utility hook: 0835 Black 4750 Champagne 7018 Pewter

Dim	ension	s	 Weight 	• Style	•U.S.
D	w	н		Number	Price
13⁄4"	31/2"	2"	0.25 lb	WHOOK	\$37

Work Tags



Tip: Tags are wet-erase and reusable.

	Standard Includes	Required to Specify
Need help? Product details, page 30	Tags, package of 10: 6544 Frost	Style number

Specification Information Dimensions ·Weight ·Style ·U.S.						
D	W	Н		Number	Price	
1/2"	23⁄8"	⁵ ⁄16"	1 lb	wwT	\$37	

Markerboard



Tip: Not recommended for use on SlatRail.

Need help? Product details, page 30		s, • F	Dry-erase mark Frame:aluminur ntegrated holde		Style number	Style number	
	ecifica nensions W		formation •Weight	• Style Number	·U.S. Price		
1"	173⁄4"	113⁄4"	1.75 lb	WMB	\$103		



Required to Specify

Standard Includes

Cable Rings



Standard Includes Required to Specify Need help? · Cable ring, package of 4: 6544 Frost Style number Product details, page 30 **Specification Information** ·U.S. Dimensions Weight • Style W D н Number Price 1"

11/2" 1" 0.25 lb **KCR** \$30

Wastebasket



Standard Includes

· Coat hook: paint

Coat Hook

Tip: Coat hook not recommended for use at end of panel run configurations.

▶ Need help?

Product details,

Tip: Maximum weight for coat hook is 10 lb.





Details Specification Guide

Required to Specify

2 Paint color number for coat hook:

1 Style number

D

3"

W

151/2"

н

73⁄4"

1 lb

Flat Top Hanger



Tip: Maximum weight for hanger is 10 lb.

	Standard Includes		Required to Specify
 Need help? Product details, page 31 	 Hanger: paint Rubber sleeve 		1 Style number 2 Paint color number for hanger: 0835 Black 4750 Champagne
Specificatio	n Information		
·Dimensions	•Weight •Style	۰U.S.	

Price

\$22


Number

FTH

Pelican Pencil Drawers

Tip: Drawer requires a 24" unobstructed worksurface depth and 20"W clearance.

Tip: For locks to be keyed alike to other Steelcase locks, specify a non-locking drawer and order locking plugs separately (service part number 877209201SR). Field installation will be required.








WDPL \$ 97



Organizational Worktools

Pelican Installation Bar



			Standard I	Required to Specify		
	help? ıct details 31		Installation bar			Style number
-						
-			nformation •Weight	• Style	·U.S.	
_	ecifications W		nformation •Weight	• Style Number	•U.S. Price	
Dim	ensions W	5				



Details Specification Guide

SOTO Worktools

SOTO Rail	Product Details	SOTO rail clamps are standard with rubber feet to	Surface Materials	Actual Dimensions		
	SOTO rail supports sev-	ensure a tight fit without	SOTO rail	Depth	1"	
	eral SOTO shelf and work- tool combinations.	marring worksurface.	4799 Platinum	Width	28", 34", 40", 46", 52", 58", and 64"	
	SOTO rail provides 1"	Worksurface must be a minimum depth of 18" when		Height	31/2"	
	clearance between work- surface and rail for cable	using SOTO rail.		Weight	4.6 lb, 5.2 lb,	
ES	management.	31/4" clearance is		rroigin	5.75 lb, 6.3 lb,	
Specifying, page 49	SOTO rail is flush with top of worksurface.	required under worksurface to accommodate mounting clamps.			6.9 lb, 7.5 lb, and 8 lb	
	SOTO rail clamps onto worksurfaces or materials up to 2" thick. Each clamp	SOTO rails are not for use with glass worksurfaces.				
	requires 2" footprint above the worksurface. Clamp mounting brackets are included.	SOTO rail supports a max- imum weight of 125 lb.				
SOTO Cableways	Product Details	Surface Materials	Actual Dimensions			
@ \	SOTO cableway inte- grates with SOTO rail for	SOTO cableway • 4799 Platinum	Depth 2 ¹ /2"			
	cable management.		Width 10" and 30"			
	SOTO cableway is a		Height 8"			
	fixed height 8" below worksurface.		Weight 2 lb and 2.5 lb			
Specifying, page 51	be used in combination with c:scape fixed personal/ modesty screens. ► See page 48					
SOTO Shelves	Product Details	\sim	SOTO shelves allow for	Actu	al Dimension	
► Specifying, page 52	SOTO shelves provide space for personal objects		2 ⁷ /8" or 6" clearance between worksurface and bottom of shelf.	Depth	3 ¹ /2", 6 ³ /4", and 10 ¹ /4"	
	or technology.		SOTO shelves ship with	Width	14", 241/2", and 36	
		6" SOTO shelves accom- modate SOTO storage box	mounting hardware.	Height	69/10" and 10"	
		set of three and hold a	SOTO shelves are able to	Weight	2.2 lb, 2.5 lb, 3.6 l 3.9 lb, 4.2 lb, 4.4 l	
	T. A.	maximum weight of 17 lb for 14"W shelf and 30 lb for 24"W shelf.	be stacked or staggered to accommodate many installa- tion applications.		4.7 lb, 4.9 lb, 5.3 l 6.4 lb, and 6.7 lb	
	3" SOTO shelves accom-	for 14"W shelf and 30 lb for	accommodate many installa-		4.7 lb, 4.9 lb, 5.3	
	modate SOTO tool and	for 14"W shelf and 30 lb for	accommodate many installa- tion applications. Surface Materials SOTO shelf		4.7 lb, 4.9 lb, 5.3	
		for 14"W shelf and 30 lb for	accommodate many installa- tion applications.		4.7 lb, 4.9 lb, 5.3	

SOTO Pile Box	Product Details SOTO pile boxes may be used individually, stacked horizontally, or criss- crossed. Boxes interlock when stacked horizontal. SOTO pile boxes may be used freestanding or on 10" shelf. SOTO pile boxes accom-	SOTO pile box will fit inside c:scape furniture drawers and on shelves.	Surface Materials SOTO pile box • 6009 Arctic White	Actua Depth Width Height Weight	Dimensions 9 ⁷ /8" 12 ¹ /4" 2" 0.7 lb
SOTO Landscape Box	modate letter size materials. Product Details SOTO landscape boxes may be used individually or stacked horizontal. Boxes interlock when stacked horizontal. SOTO landscape boxes may be used freestanding or on 10" shelf.	 SOTO landscape box is standard with open front to allow for easy viewing of materials. SOTO landscape box will fit inside c:scape furniture drawers and on shelves. See SOTO Box Application Chart, page 47 	Surface Materials SOTO landscape box • 6009 Arctic White	Actua Depth Width Height Weight	I Dimensions 97/8" 133/4" 2" 0.8 lb
SOTO Tool Box	SOTO landscape boxes accommodate letter size materials. Product Details SOTO tool box accom- modates pens, pencils, Post-it® notes, and other small office tools. SOTO tool box is stan- dard with a translucent removable dividing insert to keep items separate.	SOTO tool box will fit inside c:scape furniture drawers and on shelves. ► See SOTO Box Application Chart, page 47	Surface Materials SOTO tool box • 6009 Arctic White	Actua Depth Width Height Weight	Dimensions 31/2" 31/4" 31/2" 0.3 lb
Sorto Diagonal File Box Specifying, page 54	Product Details SOTO diagonal file box supports binders and other reference materials. SOTO diagonal file boxes may be used free- standing or on 10" shelf.	 SOTO diagonal file box may be used in tall orienta- tion for most materials or short orientation for larger materials. SOTO diagonal file box will fit inside c:scape furni- ture drawers and on shelves. See SOTO Box Application Chart, page 47 	Surface Materials SOTO diagonal file box • 6000 Black • 6009 Arctic White	Actua Depth Width Height Weight	I Dimensions 12 ¹ /4 ^{^π} 4 ^π 97/8 ^π 0.5 lb

SOTO Worktools, continued

SOTO Utility Box	 Product Details SOTO utility box is for use on 3" shelf, inside personal box, or on worksurface. SOTO utility box will fit inside c:scape furniture drawers and on shelves. See SOTO Box Application Chart, page 47 	Surface Materials SOTO utility box • 6000 Black • 6009 Arctic White	Actual DimensionsDepth37/8"Width9"Height9"Weight0.3 lb		
SOTO Personal Box	Product Details SOTO personal box provides user controlled area for small business or personal items. SOTO personal boxes may be used freestanding or on 10" shelf. SOTO personal boxes may be used individually or stacked horizontal. Boxes interlock when stacked horizontal.	 SOTO storage box set of three fits neatly inside personal box. SOTO personal box will fit inside c:scape furniture drawers and on shelves. > See SOTO Box Application Chart, page 47 	Surface Materials SOTO personal box • 6000 Black • 6009 Arctic White	Actua Depth Width Height Weight	9" 9" 2" 0.3 lb
SOTO Storage Boxes, Set of Three Specifying, page 55	 Product Details Soto storage boxes, set of three is standard with one open rectangle, one open rectangle with per- manent divider, and one long rectangle with white lid boxes. Soto storage boxes, set of three may be used freestanding or on 3" shelf, 6" shelf, or personal box. Soto storage boxes will fit inside c:scape furni- ture drawers and on shelves. See SOTO Box Application Chart, page 47 	Surface Materials Soft storage boxes, set of three • Semi-opaque • White	Actual Dimensions Open Re-tangle Box Depth 2 ¹ /8" Depth 2 ¹ /8" Width 4 ¹ /4" Height 2 ³ /8" Weight 0.2 lb Open Re-tangle Box with Divider Depth 2 ¹ /8" Width 4 ¹ /4" Height 2 ³ /8" Width 4 ¹ /4" Height 2 ³ /8" Weight 0.2 lb	Long Rewith Lid Depth Width Height Weight	2 ¹ /8" 8 ⁵ /8" 2 ³ /8" 0.4 lb

• • • • • • • • • • • • • •

SOTO Application Charts

	Tool Box	Pile Box	Diagonal File Box	Personal Box	Landscape Letter Box	Utility Box	Storage Box Set of Three
Shelf 10"D and 241/2"W	Yes	Yes	Yes (Rotates 90°)	Yes	Yes	Yes	Yes
Shelf 6"D x 241/2"W	Yes					Yes	Yes
Shelf 3"D x 36"W	Yes					Yes	Yes
Display Shelf 24 ¹ /2"W and 5"H Stanchions						Yes	
Display Shelf 24 ¹ /2"W and 8"H Stanchions						Yes	
c:scape 1"H open storage	Yes	Yes	Yes	Yes	Yes	Yes	Yes
c:scape 11/2"H open upper storage drawer	Yes			Yes		Yes	Yes
c:scape 11/2"H upper storage shelf	Yes	Yes		Yes	Yes	Yes	Yes
c:scape 11/2"H lower storage drawer	Yes	Yes	Yes	Yes	Yes	Yes	Yes
c:scape 11/2"H lower storage shelf	Yes	Yes	Yes	Yes	Yes	Yes	Yes

Details/c:scape Desk Application Chart

:		c:scape Desk
	FYI single flat panel monitor arm with c:scape rail brackets	Place anywhere on desk (rail only)
:	FYI dual flat panel monitor arm with c:scape rail brackets	Place anywhere on desk (rail only)
:	5" Lift and Lock and 19" platforms, right mouse surface, with c:scape 24" top brackets	Right or left of center only
	5" Lift and Lock and 19" platforms, left mouse surface, with c:scape 24" top brackets	Right or left of center only
:	5" Lift and Lock and 19" platforms, right mouse surface, with c:scape 30" top brackets	Right or left of center only
•	5" Lift and Lock and 19" platforms, left mouse surface, with c:scape 30" top brackets	Right or left of center only
:	Vertical processor sling with c:scape brackets	Right end or left end of desking only

SOTO W	orktool/SOTO I	Rail Application	on Chart					
	Shelf 10"D x 24 ¹ /2"W	Shelf 6"D x 24 ¹ /2"W	Shelf 3"D x 30"W	Display Shelf Stanchions 24 ¹ /2"W x 5"H	Display Shelf Stanchions 24 ¹ /2"W x 8"H	LED Light Rail Mount	20"L Cableway	30"L Cableway
Rail 28"W	1	1	1 w/overhang	1	1*	1**	1	1 w/overhang
Rail 34"W	1	1	1 w/overhang	1	1*	1**	1	1
Rail 40"W	1	1	1 w/overhang	1	1*	1**	2	1
Rail 46"W	1	1	1 w/overhang	1	1*	1**	2	1
Rail 52"W	2	2	1	2	2*	1**	(1) 20* and (1) 30*	(1) 20* and (1) 30*
Rail 58"W	2	2	1	2	2*	1**	(1) 20* and (1) 30*	(1) 20* and (1) 30*
Rail 64"W	2	2	1	2	2*	1**	(3) 20* or (1) 20* and (1) 30*	(2) 20* or (1) 20* and (1) 30*

SOTO Worktools/c:scape Application Chart


	Shelf 10"D x 24 ¹ /2"W	Shelf 6"D x 24 ¹ /2"W	Shelf 3"D x 30"W	Display Shelf Stanchions 24 ¹ /2"W x 5"H	Display Shelf Stanchions 24 ¹ /2"W x 8"H	LED Light Rail Mount	20"L Cableway	30"L Cableway
c:scape 60"W desk	2	2	1	2	2*	1**	N.A.	N.A.
c:scape 66"W desk	2	2	1	2	2*	1**	N.A.	N.A.
c:scape 72"W desk	2	2	1	2	2*	1**	N.A.	N.A.
c:scape 78"W desk	2	2	1	2	2*	1**	N.A.	N.A.
c:scape 1.5 high storage 30"W	1	1	1 w/overhang	1	1*	1**	N.A.	N.A.
c:scape 1.5 high storage 36"W	1	1	1 w/overhang	1	1*	1**	N.A.	N.A.
c:scape 1.5 high storage 42"W	1	1	1	1	1*	1**	N.A.	N.A.
c:scape 1.5 high storage 48"W	1	1	1	1	1*	1**	N.A.	N.A.

* All other shelves can occupy the same space mounted 3" below.

** Able to occupy the same space with 24" and 36" shelves (not display shelves).

SOTO Worktools

SOTO Rails



Tip: Rails clamp to freestanding worksurfaces or material up to 2" thick. Rails are not applicable for glass surfaces.

Tip: Not applicable on glass surfaces.

Tip: Allow 1" clearance between worksurface and rail for cable management. Allow 2" for rail mount installed behind a worksurface, and 3³/4" overall to install the rail.

Tip: Maximum weight load for rails is 2 lb per lineal inch.


Tip: Each clamp requires a $2^{\prime\prime}$ footprint above the worksurface, and a $3^{1}/4^{\prime\prime}$ clearance below the worksurface.

Tip: Rails require a minimum worksurface depth of 18" for stability.

			Standard I	ncludes		Required to Specify
	help? uct detail 44		Rail: 4799 Plati	num		Style number
			Related Pr	oducts		
			SOTO worktool SOTO shelves	S		Page 49Page 52
Sp	ecifica	ation In	formation			
· Dim D	ension W	s H	• Weight	• Style Number	·U.S. Price	
1"	28"	31⁄4"	4.6 lb	DSR28	\$197	
1"	34"	31⁄4"	5.2 lb	DSR34	\$208	
1"	40"	31⁄4"	5.75 lb	DSR40	\$220	
1"	46"	31⁄4"	6.3 lb	DSR46	\$233	
1"	52"	31⁄4"	6.9 lb	DSR52	\$245	
1"	58"	31⁄4"	7.5 lb	DSR58	\$257	
1"	64"	31⁄4"	8 lb	DSR64	\$270	



SOTO Rails for use with Tour



Tip: Allow 1" clearance between worksurface and rail for cable management. Allow 2" for rail mount installed behind a worksurface, and 3³/4" overall to install the rail.

Tip: Maximum weight load for rails is 2 lb per lineal inch.

Tip: Each clamp requires a 2" footprint above the worksurface, and a 31⁄4" clearance below the worksurface.

Tip: Tour rails clamp to Tour bench troughs. Rails are not applicable for glass surfaces.

Tip: Rails require a minimum worksurface depth of 18" for stability.

	Sta	ndard	Inclu	des		Required to Specify
Need help? Product details, page 44	• Rail:	4799 Pla	atinum			Style number
	Rela	ated I	Produc	ts		
	· SOT	O workto	ols			► Page 49
	• SOT(O shelve	s			► Page 52
0	1					
Specification	Infor	matio	n			
Corresponding Table Top Width	• Dim D	nension W	ns H	·Weight	• Style Number	·U.S. Price
60"	1"	52"	31⁄4"	6.9 lb	DSRT52	\$245
66"	1"	58"	31⁄4"	7.5 lb	DSRT58	\$257
72"	1"	64"	31⁄4"	8 lb	DSRT64	\$270
:	:			:	:	:



Required to Specify

Style number


SOTO Cableways

Tip: Cableway hangs fixed at 8" below the worksurface.

Need help?

Product details,

page 4	44	-,					
			Related Pr	oducts			
			SOTO worktools SOTO shelves	s		▶ Page 49 ▶ Page 52	
Spe	cifica	ation l	nformation				
Dime D	ension W	ns H	·Weight	• Style Number	•U.S. Price		
21⁄2 "	20"	8"	2 lb	DSCW20	\$145		
	30"	8"	2.5 lb	DSCW30	\$163		



21/2 "	30"	8"	2.5 lb	DSCW30	\$163

Standard Includes

Cableway: 4799 Platinum



SOTO Shelves

Tip: All SOTO shelves allow for 27/8" or 6" between worksurface and bottom of shelf.

▶ Need help? Product details, page 44

Standard Includes
Shelf: paint Stanchions: 4799 Platinum

Required to Specify 1 Style number

2 Paint color number for shelf: 4231 Arctic White 4799 Platinum

Spe	cificatio	on Infor	mation			
Dime	ensions		·Weight		·U.S.	
; D	W	н	:	Number	Price	
:				•	:	

36"W Standard Shelf

31/2"	36"	69⁄10"	3.9 lb	DSSA363	\$144
			•		

36"W High Shelf

31⁄2" 36" 10" 4.2 lb DSSA363H \$149



24"W High Shelves

63⁄4"	24"	10"	5.3 lb	DSSA246H	\$154
101/4"	24"	10"	6.7 lb	DSSA2410H	\$164
:			:	:	:



14"W Standard Shelves

••••••				
14"	69⁄10"	2.2 lb	DSSA143	\$138
14"	6%10"	3.6 lb	DSSA146	\$144
14"	69⁄10"	4.4 lb	DSSA1410	\$154
	14" 14"	14" 69/10" 14" 69/10"	14" 6%10" 3.6 lb	14" 6%10" 2.2 lb DSSA143 14" 6%10" 3.6 lb DSSA146



14"W Hinh Shelves

17 10	ingn o	1101403			
31⁄2"	14"	10"	2.5 lb	DSSA143H	\$144
63⁄4"	14"	10"	3.9 lb	DSSA146H	\$149
10 ¹ /4"	14"	10"	4.7 lb	DSSA1410H	\$159
					•

For Canadian Pricing Multiply U.S. Price by the Canadian price factor. See page 1 for details.

Organizational Worktools

SOTO Pile Box



	Standard I	Required to Specify			
Need help? Product details, page 45	• Pile box: 6009 /		tic	Style number	
Dimensions D W H	·Weight	• Style Number	·U.S. Price		

\$38

SOTO Landscape Letter Box

Þ

97⁄8"

121/4" 2"

0.7 lb



	Standard Includes	Required to Specify
 Need help? Product details, page 45 	Landscape letter box: 6009 Arctic White plastic	Style number

DSSPB

Dime	ensions		nformation •Weight	• Style	۰U.S.
D	W	н	weight	Number	Price
/8"	133⁄4"	2"	0.8 lb	DSLLB	\$38

SOTO Tool Box



Tip: Tool box contains removable semi-opaque insert to separate pens from sticky notes.

 Need help? Product details, page 45 	• Tool box: 6009	Arctic White plas	tic	Style number	
Specification	n Information				
• Dimensions D W H	·Weight	• Style Number	·U.S. Price		

3¹/2" 3¹/4" 3¹/2" 0.3 lb **DSTB** \$33

Standard Includes



Required to Specify

SOTO Diagonal File Box



	Standard I	Required to Specify		
Need help? Product details, page 45	 Diagonal file bo 	x: 6009 Arctic W	Style number	
	Information			
Specification	Information • Weight	• Style	• U.S.	

\$38

SOTO Utility Box

12¹/4" 4"

97⁄8"

0.5 lb

DSDFB



	Standard Includes	Required to Specify
Need help? Product details, page 46	Utility box: 6009 Arctic White plastic	Style number

Spe Dime	۰U.S.				
D	W	H	·Weight	• Style Number	Price
37⁄8"	9"	11⁄4"	0.3 lb	DSUB	\$33

SOTO Personal Box



	Standard Includes	Required to Specify
 Need help? Product details, page 46 	Personal box: 6009 Arctic White plastic	Style number

Sp	Specification Information						
Dimensions Weight Sty				• Style	•U.S.		
D	W	н	•	Number	Price		
:			:	:			
9"	9"	2"	0.3 lb	DSPB	\$33		



Organizational Worktools

SOTO Storage Boxes, Set of Three

h



Tip: The storage box set fits inside the personal box.

- Tip: The box dimensions are: • Open rectangle box with or without divider 2¹/8"D x 4¹/4"W x 2³/8"H
- Long rectangle box with lid 2¹/₈"D x 8⁵/₈"W x 2³/₈"H


	Sta	indard Includes	Required to Specify
Need help? Product detai page 46		of three storage boxes: semi-opaque boxes wit e cover mation	th Style number
• Style Number	·Weight	·U.S. ·Price	
-			

DSSB 0.4 lb \$38



Details Specification Guide

SOTO II Worktools

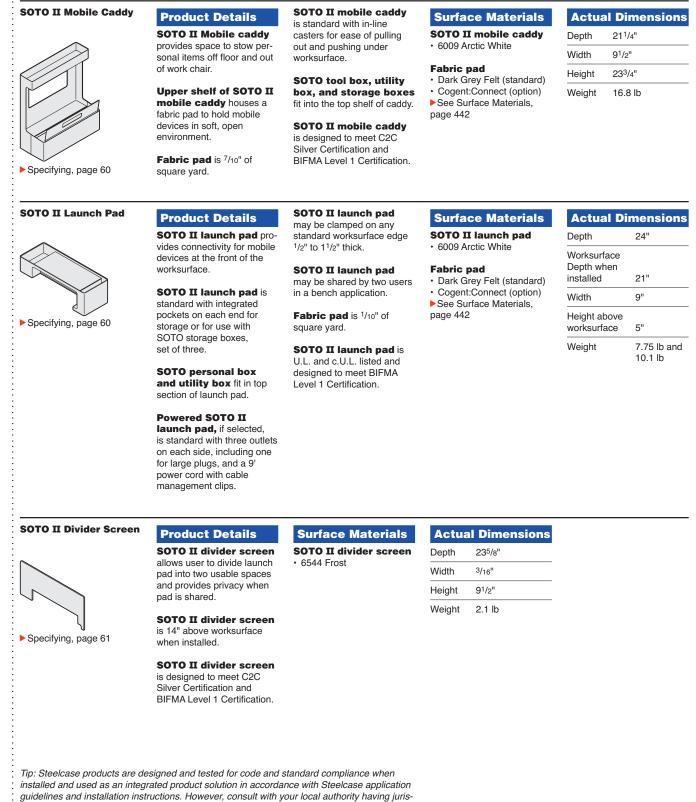

diction as they have final say if the products as installed are compliant with local code.


SOTO II Functional Screen	Product Details	SOTO II functional	Surface Materials	Actual Dimensions	
screen	SOTO II functional	screen is standard with felt liner to dampen noise.	SOTO II functional	Overall Depth 28 ¹ /2"	
	screen combines organiza- tion and boundary while pro-	SOTO II functional	 screen 6009 Arctic White 	Overall Width 13/4"	
	viding privacy.	screen is 14" above work-		Overall Height 14"	
	SOTO II functional screen has a 1 ³ /4"	surface when installed. SOTO II functional		Worksurface Installed Depth 211/2"	
Tip: Functional screen not	integrated opening to hold frequently accessed docu- ments and materials.	screen is designed to meet C2C Silver Certification and BIFMA Level 1 Certification.		Worksurface Installed Width 1 ³ /4"	
applicable for use with glass, bullnose, knife-edge, or any other non-standard worksur-	SOTO II functional screen may be clamped to	SOTO II functional screen is field changeable		Worksurface Installed Height 11"	
face edge. ▶ Specifying, page 61	any standard worksurface $^{3/4"}$ to $1^{1/2"}$ thick. Clamp depth is $2^{1/2"}$.	from right to left facing. Phillips screwdriver is required.		Worksurface Installed Pocket Opening 1 ³ /8"	
SOTO II Personal Pocket	Product Details	Ends of SOTO II per- sonal pocket are open to	Surface Materials	Actual Dimensions	
	SOTO II personal	accommodate various	SOTO II personal	Depth 11 ³ /4"	
	pocket provides space to store frequently accessed	sizes of materials.	 pocket 6000 Black 	Width 2"	
	materials.	SOTO II personal pocket holds a maximum		Height 5 ¹ /2"	
Specifying, page 61	SOTO II personal	weight of 10 lb.		Weight 1.1 lb	
opeonynig, page o'r	pocket may be used free- standing in a single unit or ganged to create a desktop organizer.	SOTO II personal pocket is designed to meet BIFMA Level 1 Certification.			
	When used as a single unit, SOTO II personal pocket will easily attach to mobile caddy or functional screen.				
SOTO II Cable Clip	Product Details	Surface Materials	Actual Dimensions		
	SOTO II cable clip pro-	SOTO II cable clip	Depth 2"		
	vides cable management.	 6009 Arctic White 6059 Sterling Dark Solid 	Width 1"		
❤ Tip: Cable clips cannot be	SOTO II cable clip clamps to any worksurface	C C	Height 2"		
used with glass, bullnose, knife edge, or other non- standard worksurface edges. ▶ Specifying, page 62	3/4" to 11/4" thick.		Weight 0.5 lb		
SOTO II Personal Hook	Product Details	SOTO II personal hook clamps to any worksurface	Surface Materials	Actual Dimensions	
¢	SOTO II personal hook is designed to hold light-	³ /4" to 1 ¹ /4" thick.	 SOTO II personal hook 6009 Arctic White 	Depth 2"	
*	weight bags, keys, umbrella, or other small items.	SOTO II personal hook holds a maximum weight of	6059 Sterling Dark Solid	Width 3/4"	
Tip: Personal hook not appli- cable for use with glass,		10 lb.		Height 2"	
bullnose, knife-edge, or any other non-standard worksur- face edge. ▶ Specifying, page 62				Weight 0.5 lb	
installed and used as an integ guidelines and installation ins	esigned and tested for code and s grated product solution in accorda tructions. However, consult with y if the products as installed are co.	nce with Steelcase application our local authority having juris-			

58

SOTO II Monitor Bridge	Product Details	Anti-skid pads are stan- dard to help prevent	The distance between bridge stanchions is	Actual Dime	nsions
\sim	SOTO II monitor bridge	slipping.	27".	Depth	9"
	supports monitor or multiple monitors (depending on size)	Fabric pad is .174 sq	Channel opening size is	Width	29 ² ⁄5"
	and one-over-one screen application with laptop.	yards.	0.7"D x 29"W x 0.8"H.	Height	4 ¹ ⁄2"
		The distance between		Bridge weight	4.1 lb
Specifying, page 62	Optional monitor bridge shelf can support up to three SOTO personal	worksurface top and underside of bridge is 31⁄2".	Surface Materials SOTO II monitor bridge • 6009 Arctic White	Shelf weight	8.24 lt
	boxes and provide additional storage space for objects or keyboard.	The distance between worksurface top and underside of shelf is 1".	Fabric pad • Dark Grey Felt (standard)	Application SOTO II USB cl station is availab	harging
	SOTO II monitor bridge clears space in front of user for more available	The distance between top of shelf and under-	 Cogent:Connect (option) See Surface Materials, page 442 	mount to underside or optional shelf. See page 63	
	worksurface. SOTO II monitor bridge can hold a maximum 50 lb.	side of bridge is 21/2".		SOTO II monito works with SOTO I shelf to allow use v as a second screet ▶ See page 62	I laptop vith laptop
SOTO II Laptop Shelf	Product Details	SOTO II laptop shelf supports tablet or cell phone	The distance between bridge stanchions is 9".	Actual Dime	nsions
\wedge	SOTO II laptop shelf	in display or video chat	Channel anoning size	Depth	141⁄4"
	allows user to utilize an external keyboard and the laptop as a dual screen. SOTO II laptop shelf raises the laptop for better user ergonomics. Docking station can be rear or side-mounted. SOTO II laptop shelf is available in rail-mounted or freestanding. Both versions can hold a maximum 20 lb.	angle. Anti-skid pads are stan- dard to help prevent slipping. The distance between worksurface top and underside of front is 57%" for rail-mounted shelf and 53%" for freestanding shelf. The distance between worksurface top and underside of back of shelf is 71/4".	Channel opening size for shelf is 0.6"D x 12"W x	Width	14"
			0.6"H. Foot length of free-	Height of rail-mounted shelf	95⁄8"
			standing shelf bracket is 11".	Height of freestanding shelf	7"
			The front of the shelf has a ² /5"H lip.	Weight of rail-mounted shelf	2.7 lb
Specifying, page 63			Surface Materials	Weight of freestanding shelf	3 lb
			SOTO II laptop shelf • 6009 Arctic White	Application	Topics
	Allows use of shelf with monitor arms or monitor bridge.		• 4799 Platinum	SOTO personal between shelves le additional object st ► See page 54	box fits egs for
SOTO II USB Charging Station	Product Details	Surface Materials	Actual Dimensions		
	SOTO II USB charging	SOTO II USB charging	Depth 11/2"		
AL OU	station is standard with three 2.0 USB ports and has	station6527 Merle	Width 3"		
	a small profile.		Height 7/10"		
	SOTO II USB charging station can be freestand-		Weight 1.05 oz		
Specifying, page 63	ing or mounted using pro- vided adhesive strip.				
	SOTO II USB charging station will mount to the underside of most shelves, including SOTO shelves, SOTO II laptop shelf, and SOTO II monitor bridge.				

April 2015

Details Specification Guide

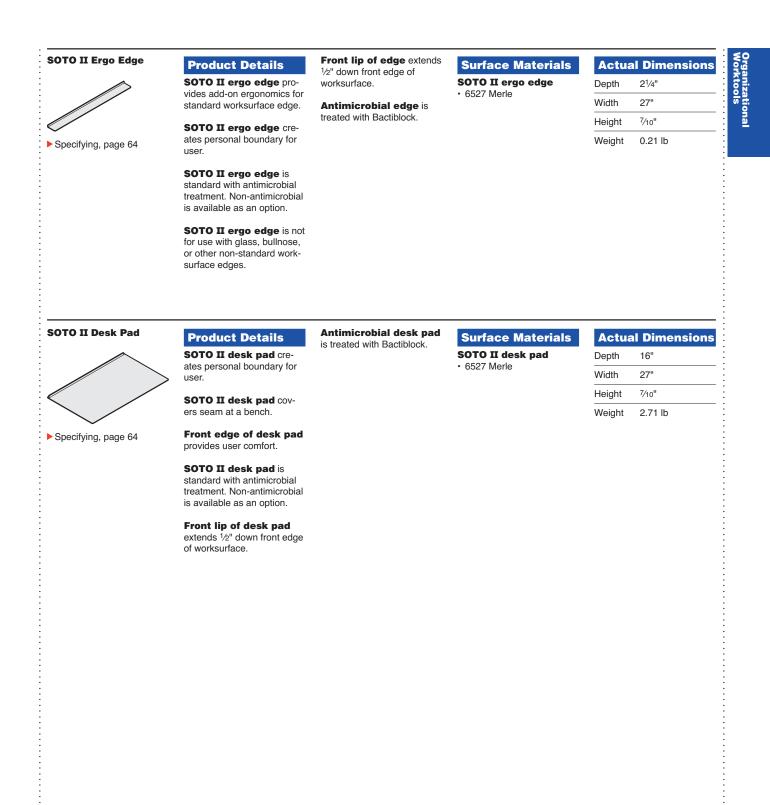

SOTO II Worktools

▶ Need help?

page 56

Surface

Materials

Dimensions

D

211/4"

W

91/2"


Product details,

page 56

S Μ

Product details,


SOTO II Mobile Caddy



Tip: Height-AdjusTable worksurface controllers and cables must be clear of mobile caddy.

Tip: When positioning worksurface in lowest position, mobile caddy must be moved from under worksurface.

SOTO II Launch Pad



•		
	Standard Includes	Required to Specify
Need help?	Launch pad: 6009 Arctic White	1 Style number

U.S. Price

·U.S.

Base

Price

\$425

No cost

+\$37

+\$79

· Fabric pad: grey felt

Standard Includes

Fabric covered pad

Options

Fabric finish set 1

Fabric finish set 2

Weight

16.8 lb

Grey felt

Specification Information

н

233/4"

· Mobile caddy: 6009 Arctic White

· Fabric covered pad: dark grey felt

· Powered, if selected: 3 outlets on each side, 9' power cord, cable management clips

• Style

DSMC

Number

Required to Specify	
1 Style number	

2 Options, if selected (see below)

Required to Specify

2 Options, if selected (see below)

Required to Specify

Specify fabric color number.

Specify fabric color number.

See Surface Materials, page 442.

1 Style number

Specify grey felt.

See Surface Materials, page 442.

	Options	U.S. Price	Required to Specify	
Surface	Fabric covered pad			
Materials	 Grey felt Fabric finish set 1 Fabric finish set 2 	No cost +\$37 +\$79	Specify grey felt. Specify fabric color number. Specify fabric color number.	

Specification Information							
Din	nensio	ns	·Weight	• Style	• U.S.		
D	W	н	:	Number	Base		
					Price		

Non-Powered Launch Pad

24" 9" 5" 7.75 lb DSLPLNP \$280

Powered Launch Pad

24" 9" 5" 10.1 lb DSLPLP \$425



SOTO II Launch Pad Divider Screen



Tip: Screen is 14"H off worksurface when installed.

			Standard I	ncludes	Requir	ed to Specify
Need help? Product details, page 56 Specification I • Dimensions D W H		S,	Screen: 6544 F		Style num	ıber
		s	formation •Weight	Style	·U.S.	
	w	н		Number	Price	

Standard Includes

• Weight

5.1 lb

· Functional screen: 6009 Arctic White

• Style

DSFS

Number

SOTO II Functional Screen

▶ Need help?

Product details, page 57

Dimensions

28¹/2" 1³/4"


W

D

Specification Information

н

14"



Tip: Screens cannot be used on glass, bullnose, knife edge, or other non-standard worksurface edges.

Tip: All Height-AdjusTable Worksurface controllers must be mounted clear of installed screen.

SOTO II Personal Pocket



Tip: Personal pocket fits on mobile caddy and functional screen, or can be ganged together while freestanding.

	Standard Includes	Required to Specify
 Need help? Product details, page 57 	Personal pocket: 6000 Black	Style number

·U.S.

Price

\$257

Dime			nformation •Weight	• Style	۰U.S.
D	W	Н		Number	Price
3⁄4"	2"	51/2"	1.1 lb	DSPP	\$38

For Canadian Pricing Multiply U.S. Price by the Canadian price factor. See page 1 for details.

Details Specification Guide

Style number

Required to Specify

SOTO II Cable Clip



Tip: Clips cannot be used with glass, bullnose, knife edge, or other non-standard worksurface edges.

			Stanuaru I	nciuues		nequired to specify
page 5	ct details, 57	,	Cable clip: plass	tic		1 Style number 2 Plastic color number for cable clip: 6009 Arctic White 6059 Sterling Dark Solid
Dim D	ensions W	н	·Weight	• Style Number	•U.S. Price	
2"	1"	2"	0.5 lb	DCCLIP	\$23	

Required to Specify


Standard Include

SOTO II Personal Hook

		Standard Includes	Required to Specify
Tip: Hooks cannot be used with glass, bullnose, knife edge, or other non-standard worksurface edges.	Need help? Product details, page 57	Personal hook: plastic	1 Style number 2 Plastic color number for personal hook: 6009 Arctic White 6059 Sterling Dark Solid

Dimensio	ons	·Weight	• Style	·U.S.
D W	H		Number	Price
	2"	: 0.5 lb	ррноок	: \$23

SOTO II Monitor Bridge



	Standard Includ	es	Required to Specify
 Need help? Product details, page 58 	 Monitor bridge: 6009 Ar Fabric covered pad: dat 		1 Style number 2 Options, if selected (see below) ▶ See <i>Surface Materials,</i> page 442.
	0		

	Options	U.S. Price	Required to Specify	
Surface Materials	Merle shelf	+\$67	Specify with 6527 Merle.	
	Fabric covered pad Grey felt Fabric finish set 1 	No cost +\$37	Specify grey felt. Specify fabric color number.	
	Fabric finish set 2	+\$79	Specify fabric color number.	



Spe	ecifica	tion l	nformation		
•Dim D	ension: W	s H	Weight	• Style Number	•U.S. Base
: : :			-		Price
9" :	29 ² /5"	4 ¹ /2"	4.1 lb	DSMB	\$205 :

SOTO II Laptop Shelf

			Standard I	ncludes		Required to Specify
Need h Produc page 5	ct details		Laptop shelf: 60 Stanchion: 4799			Style number
Spe	cifica	tion lı	nformation			
• Dime D	ensions W	; H	Weight	•Style Number	·U.S. Price	
Rail-	Moun	ted		·	·	
14 ³ ⁄4"	14"	9 ⁵ ⁄8"	2.7 lb	DSLSRM	\$149 :	
Free	stand	ing				
143⁄4"	14"	7"	3 lb	DSLS	\$164	

Tip: To prevent tipping with freestanding unit, press only on middle to rear of product.

Tip: Laptop shelf is able to accommodate side or rear mounted docking stations.

SOTO II USB Charging Station



Tip: Clean and dry area prior to mounting with adhesive strip.

	Standard Ir	cludes		Required to Specify
 Need help? Product details, page 58 	USB charging st G'L power cord: b		e	Style number
Specificatio	n Information			
Dimensions D W H	·Weight	• Style • Number	·U.S. Price	

; D	W	н	:	Number	Price
:			:	:	:
1 ¹ /2"	3"	7⁄10"	1.05 oz	DSUSB	\$62



SOTO II Ergo Edge



Tip: Ergo edge not applicable for use with glass, bullnose, knife-edge, or other non-standard worksurface edge.

Tip: Ergo edge must be stored flat.

Tip: Antimicrobial version is treated with Bactiblock.

Tip: Ergo edge front lip extends 1/2" down front edge of worksurface.

Need help? Product details page 59		Ergo edge: 652 Antimicrobial ec			1 Style number 2 Options (see below)
		Options		U.S. Price	Required to Specify
Edge Type	•	Non-antimicrobi	al	No cost	Specify with non-antimicrobial.
Specifica	tion Ir	nformation			
Dimension	s H	Weight	• Style Number	·U.S. Price	
	п	•	Number	FILE	
2 ¹ ⁄2" 27"	7⁄10"	0.21 lb	DSEE	\$97	

Required to Specify

Required to Specify


1 Style number

Standard Includes

Standard Includes

• Desk pad: 6527 Merle

SOTO II Desk Pad



Tip: Desk pad not applicable for use with glass, bullnose, knife-edge, or other nonstandard worksurface edge.

Tip: Desk pad must be stored flat.

Tip: Antimicrobial version is treated with Bactiblock.

Tip: Desk pad front lip extends 1/2" down front edge of worksurface.


Product details page 59	s, •A	Antimicrobial pa	ad		2 Options (see below)
	(Options		U.S. Price	Required to Specify
Pad Type	• N	Non-antimicrobi	al	No cost	Specify with non-antimicrobial.
Specifics	tion In	formation			
Specifica Dimensions D W		formation Weight	• Style Number	·U.S. Price	
Dimension	5				
Dimension	5				



Canadian price factor. See page 1 for details.

SOTO II Worktools

Steelcase Divisio Side Screen

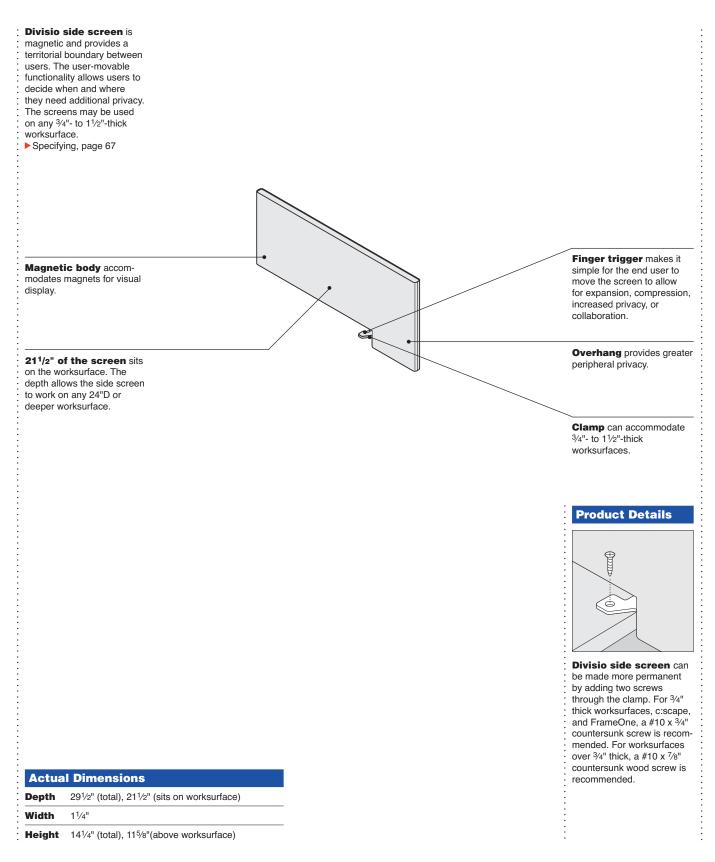

Steelcase Divisio Side Screen

Need help?

Product details, page 66

Organizational Worktools



Tip: The Divisio side screen can be used on any 3/4"- to 11/2"-thick worksurface.

Tip: The Divisio side screen has an overhang of 8". This is important when planning for returns or storage.

Tip: The Divisio side screen weighs approximately 141/2 pounds. Take this into consideration when planning for use on Height-AdjusTable worksurfaces.

Tip: The Divisio side screen is intended for use on the front of a worksurface.

Tip: The Divisio side screen does not work on knife edge profiles.

- **Standard Includes**
- Screen: fabric price group A
 Top cap and clamp: 4799 Platinum paint
- **Required to Specify**
- 1 Style number
- 2 Fabric color number
- See Surface Materials, page 442.

	Options	U.S. Price	Required to Specify
Surface	Fabric		
Materials	 Fabric price group A Fabric price group 1 Fabric price group 2 Customer's Own Material (COM) 	No cost No cost +\$14 +\$16	 Specify fabric color number. Specify fabric color number. Specify fabric color number. See Surface Materials Reference Manual.

Note: Divisio side screen is included here to simplify your planning. It may have different pricing terms than other products in this specification guide. They are ordered through Answer electronic catalog (TSA).



See page 1 for details.


Details Specification Guide

Steelcase Fixed Personal/Modesty Screens

Personal/modesty screens are tackable and provide variable privacy when and where it is needed. The screens can be used on the beam, on $1^{1/2}$ -high low storage with a connect zone, on the back of the desk for visual privacy, or below the desk for modesty. 24"H is not intended for use in modesty position. Specifying, page 70 Fixed personal/modesty screens are available in three heights, 12", 191/2", and 24", and four widths to accommodate varying levels of privacy. Height is measured from the top of the mounting surface to the top of the screen. Brackets are attached to the screens.

Actual Dimer	isions
Width	30", 36", 42", or 48"
Height	11", 18 ¹ /2", or 23"
Overall height	12", 19 ¹ /2", or 24"
Thickness	3⁄4"

Tip: Overall height is measured from top of mounting surface to the top of the screen.

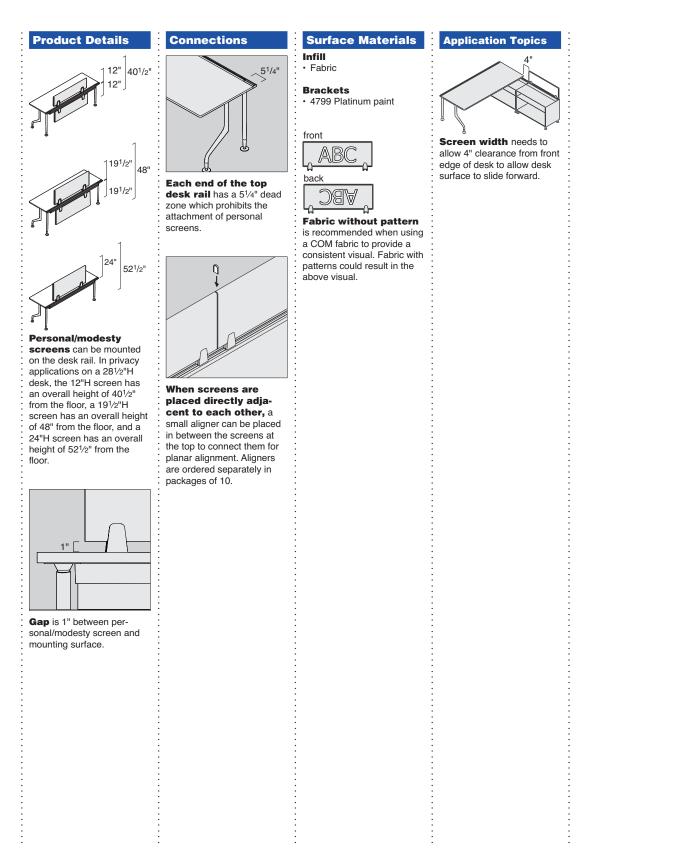

Steelcase Fixed Personal/Modesty Screens

Standard Includes

Brackets: 4799 Platinum

- Personal/modesty screens: fabric price group 1
- Need help? Product details, page 68

- 1 Style number 2 Fabric color number for screen
 - 3 Options, if selected (see below)


Required to Specify


- See Surface Materials, page 442.

	Options	U.	S. Price	•	Required to Specify	
Surface	Fabric	12"H	19½"H	24"H		
Materials	 Fabric price group 1 Fabric price group 2 Fabric price group 3 Fabric price group 4 Customer's Own Material (COM) 	No cost +\$24 +\$64 +\$83 +\$16	No cost +\$ 33 +\$ 87 +\$111 +\$ 16	No cost +\$ 39 +\$111 +\$136 +\$ 16	Specify fabric color number. Specify fabric color number. Specify fabric color number. Specify fabric color number. See Surface Materials Reference Manual	

Tip: When using COM fabric, it is recommended that non-patterned fabric be used to provide a consistent visual between adjacent screens, and from one side to the other.







Tip: 24"H screens are not intended for use in the modesty position.

Note: Fixed personal/modesty screens are included here to simplify your planning. It may have different prioducts in this specification guide. They are ordered through c:scape electronic catalog (SCX).


Specification Information • Style ·U.S. • Width Number Base Price **12"H Screens** CQSF3012 30" \$162 36" CQSF3612 \$189 42" **CQSF4212** \$214 48" **CQSF4812** \$241 191/2"H Screens


30"	CQSF3019	\$250	-
36"	CQSF3619	\$277	
42"	CQSF4219	\$303	
48"	CQSF4819	\$329	
:	:	· ·	

24"H Screens

30"	CQSF3024	\$337	
36"	CQSF3624	\$365	
42"	CQSF4224	\$390	
48"	CQSF4824	\$417	
:			


Victor2

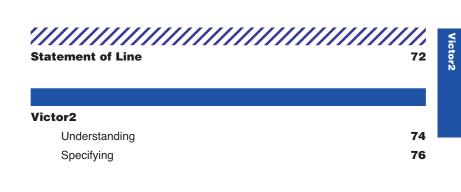

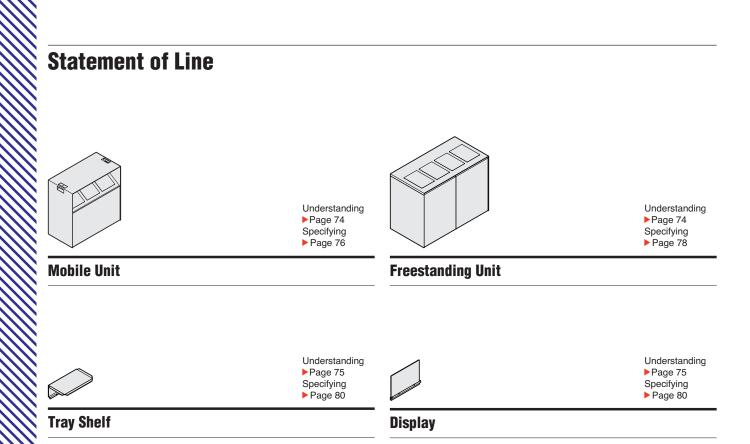


Statement of Line

Victor2

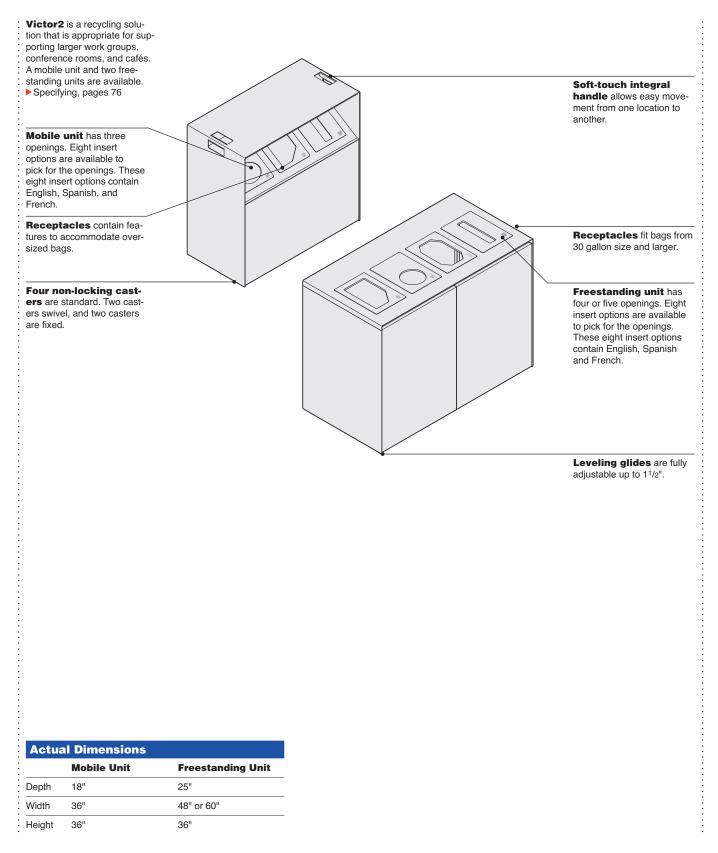



Freestanding four- or five-slot opening will accommodate two displays. Tip: A gap of 181/2" will separate the two displays on a five-opening unit.




One tray shelf and one display can be used on the freestanding unit.

Surface Materials

Top and sides Paint


Back and front

- Wood
- Laminate (HPL) Customiz stain (option on wood)




Product Details

ing units are standard with a metal case and top. Front and back of unit are available in wood or laminate.



Acrylic inserts etched with recycling icons are standard on mobile and freestanding units. The verbiage for each icon is in English/Spanish/French on the same insert.



Mobile unit is standard with three openings for inserts and sloped receptacles with built-in bag holding system.






Hinged doors on the back are standard on the mobile unit for easy access to receptacles.

Four non-locking concealed casters, two swivel and two fixed, are standard on the mobile unit.

Receptacles in mobile unit can accommodate 12 gallons each. Receptacles in freestanding unit can accommodate 30 gallon size and larger.



Soft-touch integral handle on mobile unit allows for easy movement from one location to another.

Hinged doors on the

front are standard on the

freestanding unit for easy

access to the receptacles.

Leveling glides on free-

standing units are fully

Freestanding unit is

the top of the unit.


standard with either four or

five openings for inserts on

Tray shelf can only be

used with the freestanding unit.

Tray shelf fits most trays up to 203/4" x 12".



Tip: Paper will be between

can easily be replaced with-

two acrylic plates. Paper

Freestanding four- or

Tip: A gap of 15" will sepa-

rate the two tray shelves on

Maximum capacity of

tray is 20 food trays with

maximum size of tray

five-slot opening will

accommodate two tray


a five-opening unit.

shelves.

20" x 20".


paper.

Display can only be used with the freestanding unit.










Victor2 Mobile Unit




Need help? Product details, page 74

• Mobile unit:

- Front and back: wood
- Sides and top: paint
- Finished back hinged doors
- Three slot opening with sloped receptacles and built in bag holding system
- Acrylic inserts etched with recycling icons and wording
- Three 100% recycled plastic rigid recycling bins 12 gallon capacity each
- · Four non-locking black casters: two swivel/two fixed

Required to Specify

- 1 Style number
- 2 Wood color number for front and back
- 3 Paint color number for sides and top (case)
- 4 Three acrylic inserts (see below under Required Selections)
- 5 Options, if selected (see below)
- See Surface Materials, page 442.



Tip: Verbiage on each insert contains English, Spanish, and French.

	Re	quired Sele	ections				
Acrylic Ins	Acrylic Inserts (Pick three)						
Plastic	Compost	Mixed	Waste	Paper	Aluminum	Returnables	Glass
	0	tions		S. Price	Der	uired to Spec	
Surface Materials	Woo • Prer • Prer	Wood Front and Back • Premium Wood 2 • Premium Wood 3 • Customiz stain		67 234 cost	Speci Speci Speci	fy Premium wood 2 fy Premium wood 3 fy with Customiz st Surface Materials Re	2 finish number. 9 finish number. ain.
	• Lam	ninate Front inate n Line Laminate	-\$3 e -\$2		► See S	fy laminate color nu Surface Materials Re	
	• Pain • Pain	nt on Case at price group 1 at price group 2 at price group 3	No +\$ +\$1		Speci	fy paint color numb fy paint color numb fy paint color numb	er.
Specifica	ation Info	rmation					
·Dimension	16	• Style	·U.S.				

Dim	ensions		• Style	•U.S.	
D	W	H	Number	Base	
				Price	
			:	:	

\$3732

Tip: Receptacle contains features to accommodate oversized bags.

18"

36"


36"

AWRM183636

Tip: Soft-touch integral handle allows easy movement from one location to another.

For Canadian Pricing Multiply U.S. Price by the Canadian price factor. See page 1 for details.


Victor2 Freestanding Units

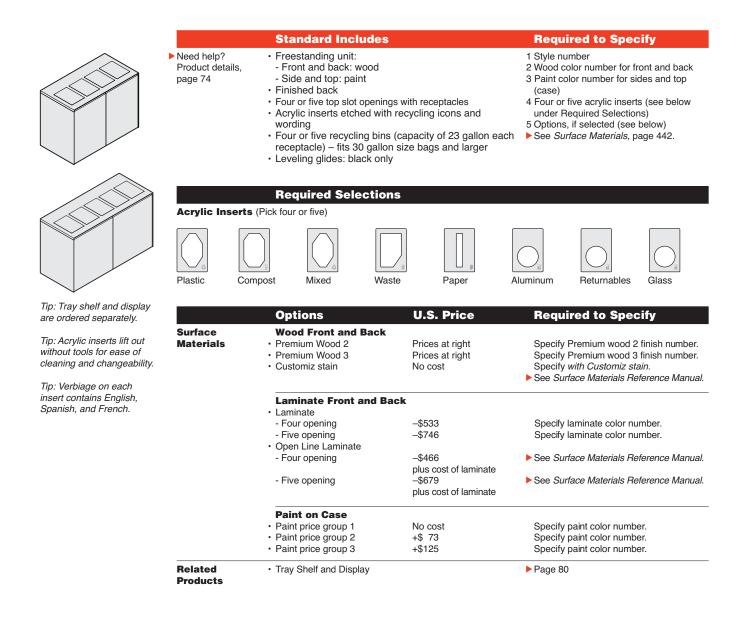



Victor2

Dim	nensio	ns	• Style	۰U.S.	• Options
D	W	H	Number	Base	· (Add \$ to
				Price	Base Price)
				- - - -	Premium Wood Wood front and back
				•	Wood 2 Wood 3
re	estan	ding	Unit - 4 Openings		
25"	48"	36"	AWRF254836	\$5332	+\$121 +\$424



·

Freestanding Unit - 5 Openings

25" 60" 36" **AWRF256036** \$6719 +\$153 +\$534



Details Specification Guide

Victor2 Tray Shelf and Display

▶ Need help?

Tray Shelf



Tip: Tray shelf fits most trays up to 20³/4" x 12".

Tip: Tray shelf cannot be used with the mobile unit.

Tip: Two tray shelves can be used on the freestanding 4 or 5 slot opening. A 15" gap will separate the two tray shelves if used on the freestanding 5 unit.

Tip: Maximum tray storage is 20 food trays.

Product details, page 75			2 Paint color number for tray 3 Options, if selected (see below) ▶ See <i>Surface Materials,</i> page 442.	
	Options	U.S. Price	Required to Specify	
Surface	 Paint price group 1 	No cost	Specify paint color number.	
Materials	 Paint price group 2 	+\$11	Specify paint color number.	
	Paint price group 3	+\$22	Specify paint color number.	
Related Products	Freestanding units		► Page 78	

Required to Specify

1 Style number

Standard Includes

Tray shelf: paint

Specification Information					
Dimensi D W		н	• Style Number	•U.S. Base Price	
12 ³ /4" 22	21/4"	9 ¹⁵ /16"	AWTS	\$373	

Display



Tip: Display holds two 81/2" x 11" papers or one 11" x 17".

Tip: Display cannot be used with the mobile unit.

Tip: Two displays can be used on the freestanding 4 or 5 slot opening. A gap of 181/2" will separate the two displays if used on the Freestanding 5 unit.

Tip: Paper is placed between the two acrylic plates.

	Standard Includes	Required to Specify
 Need help? Product details, page 75 	DisplayAttachment brackets: paint	1 Style number 2 Paint color number for bracket 3 Options, if selected (see below) > See <i>Surface Materials</i> , page 442.

	Options	U.S. Price	Required to Specify
Surface Materials	 Paint price group 1 Paint price group 2 Paint price group 3 	No cost +\$11 +\$22	Specify paint color number. Specify paint color number. Specify paint color number.
Related Products	Freestanding units		► Page 78



Lighting



Statement of Line and Comparison

82

Lighting

dash and dash mini LED Lights	
Understanding	84
Specifying	86
SOTO and SOTO Extended LED Lights	
Understanding	90
Specifying	92
Mini SOTO and Mini SOTO Extended LED Lights	
Understanding	94
Specifying	96
Elsa	
Understanding	98
Specifying	100
Pisa	
Understanding	102
Specifying	104
PowerPincher with Occupancy Sensor	
Understanding	105
Specifying	106

Statement of Line and Comparison


Task lights offer end users added control and adjust- ability to place the proper	LED Lights		
amount of task lighting to create a holistic work setting.	dash and dash mini LED Lights	SOTO and SOTO Extended LED Lights	Mini SOTO and Mini SOTO Extended LED Lights
Mounting Options	 Freestanding C-clamp Slatwall Panel Rails—SOTO, c:scape, EE6, FrameOne, Campfire, and Tour 	 Freestanding Rails—SOTO, c:scape, EE6, FrameOne, Campfire, and Tour 	Magnetic or screw mount
	Understanding Page 84 Specifying Page 86	Understanding > Page 90 Specifying > Page 92	Understanding Page 94 Specifying Page 96
Watts Type/Volt	8 LED/110 Volt	4 LED/110 Volt	4 LED/110 Volt
Color Rendering Index	80	80	80
Color Temperature	3500K	3500K	3500K
Horizontal Arm Range	Standard 0"-32" Mini 0"-20 ¹ /2"	Standard 12 ¹ /4" Extended 21 ³ /4"	N.A.
Vertical Height Adjustment	Standard 2"-22 ³ /8" Mini 0"-19 ⁷ /8"	Standard 14 ³ /4" Extended 13"	N.A.
Tilt/Swivel	360° at base and head	Not available	Not available
Replacement Lamp/Bulb	Not available	Not available	Not available
Average Rated Lamp Life	• 50,000 hrs.	• 50,000 hrs.	• 50,000 hrs.
Finish Options	 Paint: Arctic White (4231), Low Gloss Black (4710), Platinum (4799), or Perfect Match Accent Paints (4990)* 	 Paint: Arctic White (4231), Low Gloss Black (4710), or Platinum (4799) 	Platinum (4799)
Electronic Dimmer	• 100%–15%	Not available	Not available
Occupancy Sensor	Available	Not available	Not available


* Not all Perfect Match Accent Paints are available. For complete listing, see Surface Materials, page 442.

Tip: Must be registered in Perfect Match program when ordering accent finishes. Registration is available at no charge.

Task lights offer end users added control and	Task Lights				
adjustability to place the proper amount of task lighting to create a holistic	Elsa Task Light	Pisa Task Light			
work setting.		20			
Mounting Options	 Freestanding C-clamp Slatwall/SlatRail Panel 	Freestanding			
	Understanding Page 98 Specifying Page 100	Understanding Page 102 Specifying Page 104			
Watts Type/Volt	13 Fluorescent/110 Volt	60 Incandescent/110 Volt			
Color Rendering Index	82	100			
Color Temperature	3500K	2850K			
Horizontal Arm Range	0"–28"	Not available			
Vertical Height Adjustment	0"–18"	21" (fixed height)			
Tilt/Swivel	• 330° at shade; 360° at base	• 20° at base			
Replacement Lamp/Bulb	• 13-watt GE 13BX	Any 60-watt incandescent			
Average Rated Lamp Life	• 10,000 hrs.	• 1,500 hrs.			
Finish Options	Paint: Pewter (7018), Dark Champagne (7021), or Charcoal (7027)	Paint: Black (0835), Arctic White (4231), Pewter (7018), or Metallic Red (7055)			
Electronic Dimmer	Not available	Not available			
Occupancy Sensor	Not available	Not available			

dash and dash mini LED Lights

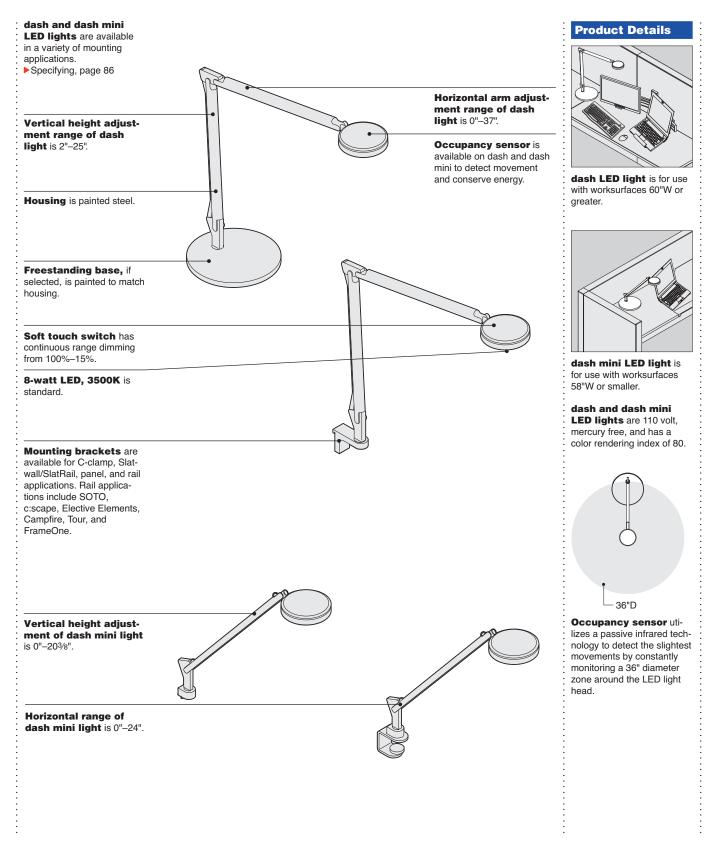



Occupancy sensor is fully integrated into the LED light head and activates in 15 minutes when no movement is detected to conserve energy.


Average rated lamp life of dash and dash mini LED lights is 50,000 hours.

Power supply uses a modular cord with standard two prong plug, and integrated 9' low voltage cord and connector to attach to light.


Head and arm of light rotate 360°.

dash and dash mini LED lights, designed in collaboration with Foster + Partners, is U.L. and c.U.L. listed and BIFMA Level 1 certified.

Connections




For applications that include an integrated SOTO rail: FrameOne, c:scape, Campfire, Tour, or SOTO rail; specify dash rail mount with integrated SOTO bracket. dash can be mounted in front of privacy screens, Slatwall, or FrameOne center screen.



Applications that include a rail mounted dash to Elective

will need to choose the optional Elective Elements Tech Zone rail mount bracket. Elective Elements Tech Zone rail mount bracket cannot be used with privacy screens, Slatwall, or FrameOne center screens. The light must be mounted adjacent to the screens or Slatwall.



Panel-mount light cannot be used in corner application.

Wiring & Cabling

Electronic dimming control features a soft touch switch, which allows dimming from 100% to 15% light output.


Surface Materials

Housing · 4231 Arctic White · 4710 Low Gloss Black • 4799 Platinum · Accent paints (option)


Mounting brackets · Paint to match housing

Cord

· Black plastic only

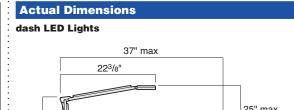


Elements Tech Zone

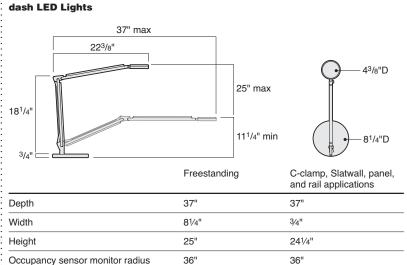

dash mini LED Lights

20³/8

3/4



•	Freestanding	C-clamp, Slatwall, panel, and rail applications
Depth	24"	24"
Width	81⁄4"	3/4"
Height	211/10"	203⁄8"
Occupancy sensor monitor radius	36"	36"

Photometric Data

			da		imum II rksurface		nce		
12"	14	20	26	31	33	31	26	20	14
9"	20	29	41	50	51	50	41	29	20
6"	25	38	52	69	74	69	52	38	25
3"	30	45	67	87	95	87	67	45	30
0"	31	49	70	95	103	95	70	49	31
3"	30	45	67	87	95	87	67	45	30
6"	25	38	52	69	74	69	52	38	25
9"	20	29	41	50	51	50	41	29	20
12"	14	20	26	31	33	31	26	20	14
	12"	9"	6"	3" Woi	CL ksurface	3" front	6"	9"	12"

Lighting

dash LED Lights

► Need help?

page 84

6

F

Product details,

Integrated SOTO rail bracket available Spring 2015

Tip: For applications that include an integrated SOTO rail: FrameOne, c:scape, Campfire, Tour, or SOTO rail; specify dash rail mount with integrated SOTO bracket. dash can be mounted in front of privacy screens, Slatwall, or FrameOne center screen.

Tip: Applications that include a rail mounted dash to Elective Elements Tech Zone will need to choose the optional Elective Elements Tech Zone rail mount bracket. Elective Elements Tech Zone rail mount bracket cannot be used with privacy screens, Slatwall, or FrameOne center screens. The light must be mounted adjacent to the screens or Slatwall.

Tip: Not all Perfect Match Accent Paints are available. For complete listing, see Surface Materials, *page 442.*

Tip: Must be registered in Perfect Match program when ordering accent finishes. Registration is available at no charge.











Standard Includes

- Task light and mounting bracket: paint
- 8-watt LED 3500K
- Continuous range dimmer
- 9' low voltage modular cord: black plastic only
- Integrated SOTO rail bracket

Required to Specify

1 Style number

- 2 Paint color number for light: 4231 Arctic White 4710 Low Gloss Black
- 4799 Platinum
- 3 Options, if selected (see below)
- See Surface Materials, page 442.

	A		D	
	Options	U.S. Price	Required to Specify	
Surface Materials	 Paint price group 1 Paint price group 3 	No cost +\$28	Specify paint color number. Specify paint color number. See <i>Surface Materials</i> , page 442.	
Rail Bracket	 Elective Elements Tech Zone bracket 	No cost	Specify with EE Tech Zone bracket.	

Specification Information								
Dim	ensior	ıs	·Weight	• Style	• U.S.			
D	w	н		Number	Base			
					Price			
			:		:			

Rail-Mounted

37"	3⁄4"	241/4"	1.7 lb	LDASHR	\$511

C-Clamp Mount

37" 3/4" 241/4" 2.2 lb **LDASHC** \$511

Panel-Mounted For Use with Answer, Series 9000, Avenir, and Kick

37" 3/4" 241/4" 2 lb **LDASHP** \$511

Slatwall- and SlatRail-Mounted

37" ³⁄4" 24¹⁄4" 2 lb **LDASHS** \$511

Freestanding

37" 8¹/4" 25" 9.65 lb **LDASHF** \$511

dash LED Lights

With Occupancy Sensor

Integrated SOTO rail bracket available Spring 2015

Tip: For applications that include an integrated SOTO rail: FrameOne, c:scape, Campfire, Tour, or SOTO rail; specify dash rail mount with integrated SOTO bracket. dash can be mounted in front of privacy screens, Slatwall, or FrameOne center screen.

Tip: Applications that include a rail mounted dash to Elective Elements Tech Zone will need to choose the optional Elective Elements . Tech Zone rail mount bracket. Elective Elements Tech Zone rail mount bracket cannot be used with privacy screens, Slatwall, or FrameOne center screens. The light must be mounted adjacent to the screens or Slatwall.

Tip: Not all Perfect Match Accent Paints are available. For complete listing, see Surface Materials, page 442.

Tip: Must be registered in Perfect Match program when ordering accent finishes. Registration is available at no charge.







▶ Need help? Product details, page 84

 Occupancy sensor • 8-watt LED 3500K

Continuous range dimmer

Standard Includes

• 9' low voltage modular cord: black plastic only

· Task light and mounting bracket: paint

Integrated SOTO rail bracket

Required to Specify

1 Style number

- 2 Paint color number for light: 4231 Arctic White
- 4710 Low Gloss Black 4799 Platinum
- 3 Options, if selected (see below)
- See Surface Materials, page 442.

	Options	U.S. Price	Required to Specify
Surface Materials	 Paint price group 1 Paint price group 3 	No cost +\$28	Specify paint color number. Specify paint color number. ▶ See <i>Surface Materials</i> , page 442.
Rail Bracket	Elective Elements Tech Zone bracket	No cost	Specify with EE Tech Zone bracket.

Sp	Specification Information						
۰Dim	nensior	ıs	• Weight	• Style	·U.S.		
D	W	н	_	Number	Base		
-					Price		
1			:	:	•		

Rail-Mounted

37" 3⁄4" 241/4" 1.7 lb LDASHOR \$562

C-Clamp Mount

37" LDASHOC 3⁄4' 241/4 2.2 lb \$562

Panel-Mounted For Use with Answer, Series 9000, Avenir, and Kick

37" 3⁄4" 241/4" 2 lb LDASHOP \$562

Slatwall- and SlatRail-Mounted

37" 3⁄4" 241/4" 2 lb LDASHOS \$562

Freestanding

37" 81⁄4" 25" 9.65 lb LDASHOF \$562

dash mini LED Lights

Integrated SOTO rail bracket available Spring 2015

Tip: For applications that include an integrated SOTO rail: FrameOne, c:scape, Campfire, Tour, or SOTO rail; specify dash rail mount with integrated SOTO bracket. dash can be mounted in front of privacy screens, Slatwall, or FrameOne center screen.

Tip: Applications that include a rail mounted dash to Elective Elements Tech Zone will need to choose the optional Elective Elements Tech Zone rail mount bracket. Elective Elements Tech Zone rail mount bracket cannot be used with privacy screens, Slatwall, or FrameOne center screens. The light must be mounted adjacent to the screens or Slatwall.

Tip: Not all Perfect Match Accent Paints are available. For complete listing, see Surface Materials, page 442.

Tip: Must be registered in Perfect Match program when ordering accent finishes. Registration is available at no charge.









Task light and mounting bracket: paint ► Need help? Product details,

page 84

- 8-watt LED 3500K
- · Continuous range dimmer
- 9' low voltage modular cord: black plastic only
- Integrated SOTO rail bracket

Standard Includes

Required to Specify

1 Style number

- 2 Paint color number for light: 4231 Arctic White 4710 Low Gloss Black
- 4799 Platinum
- 3 Options, if selected (see below)
- See Surface Materials, page 442.

	Options	U.S. Price	Required to Specify
Surface Materials	 Paint price group 1 Paint price group 3 	No cost +\$28	Specify paint color number. Specify paint color number. ▶ See <i>Surface Materials,</i> page 442.
Rail Bracket	 Elective Elements Tech Zone bracket 	No cost	Specify with EE Tech Zone bracket.

Spo	ecific	ation I	nformation
Dim	ensio	ns	·Weight
D	w	н	

imensions		• Weight	• Style	• U.S.		
	W	н		Number	Base	
					Price	
			:		•	

Rail-Mounted

24' 3/4" 203/8" LDASHMINIR \$420 1.3 lb

C-clamp Mount

LDASHMINIC 3/4' 203/8" 1.8 lb 24 \$420

Panel-Mounted For Use with Answer, Series 9000, Avenir, and Kick

LDASHMINIP 24" 3/4" 203/8" 1.6 lb \$420

Slatwall- and SlatRail-Mounted

203/8' 1.6 lb LDASHMINIS 24 3/4' \$420



Freestanding

24" 81/4" 21¹/10" 9.25 lb LDASHMINIF \$420

dash mini LED Lights

With Occupancy Sensor

Integrated SOTO rail bracket available Spring 2015

Tip: For applications that include an integrated SOTO rail: FrameOne, c:scape, Campfire, Tour, or SOTO rail; specify dash rail mount with integrated SOTO bracket. dash can be mounted in front of privacy screens, Slatwall, or FrameOne center screen.

Tip: Applications that include a rail mounted dash to Elective Elements Tech Zone will need to choose the optional Elective Elements . Tech Zone rail mount bracket. Elective Elements Tech Zone rail mount bracket cannot be used with privacy screens, Slatwall, or FrameOne center screens. The light must be mounted adjacent to the screens or Slatwall.

Tip: Not all Perfect Match Accent Paints are available. For complete listing, see Surface Materials, page 442.

Tip: Must be registered in Perfect Match program when ordering accent finishes. Registration is available at no charge.









Slatwall- and SlatRail-Mounted

203/8'

203/8' **LDASHMINIOS** 24' 3/4" 1.6 lb \$471

1.6 lb



Freestanding

3⁄4"

24"

24" 81⁄4" 21¹/10" 9.25 lb LDASHMINIOF \$471

	Standard Includes
Need help?	 Task light and mounting bra

Product details,

page 84

- sk light and mounting bracket: paint • 8-watt LED 3500K
- · Continuous range dimmer
- · 9' low voltage modular cord: black plastic only
- Occupancy sensor
- · Integrated SOTO rail bracket

R	ea	шī	red	to	S	D	eci	fv
	U U					1.1		-

1 Style number

- 2 Paint color number for light: 4231 Arctic White 4710 Low Gloss Black
- 4799 Platinum
- 3 Options, if selected (see below)
- See Surface Materials, page 442.

	Options	U.S. Price	Required to Specify
Surface Materials	 Paint price group 1 Paint price group 3 	No cost +\$28	Specify paint color number. Specify paint color number. See <i>Surface Materials</i> , page 442.
Rail Bracket	Elective Elements Tech Zone bracket	No cost	Specify with EE Tech Zone bracket.

 Dimensions 		 Weight 	• Style	•U.S.	
D W	н	_	Number	Base	
			•	Price	

Rail-Mounted

Specification Information

24" 3⁄4" 203/8" LDASHMINIOR 1.3 lb \$471


C-clamp Mount

24" 203⁄8' **LDASHMINIOC** 3/4' 1.8 lb \$471

Panel-Mounted For Use with Answer, Series 9000, Avenir, and Kick LDASHMINIOP

\$471

SOTO and SOTO Extended LED Lights

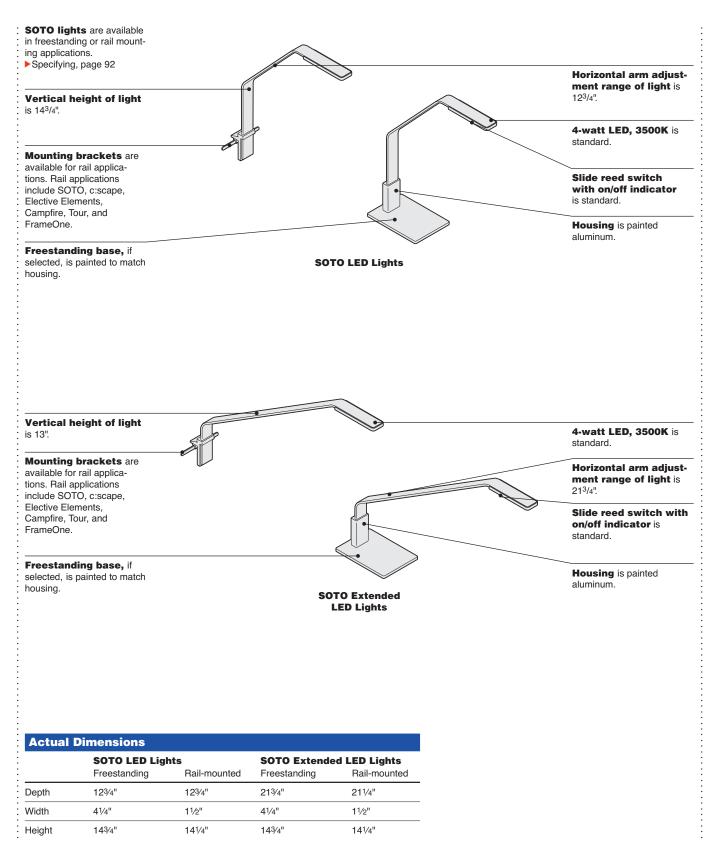

Product Details


SOTO LED lights are 110 volt, mercury free, and have a color rendering index of 80.

Average rated lamp life of SOTO LED light is 50,000 hours.


Power supply uses a modular cord standard with two prong plug, and integrated 9' low voltage cord and connector to attach to light.

SOTO LED lights are U.L. and c.U.L. listed.

Connections



Rail mounted bracket of SOTO LED may occupy the same space as a SOTO 3", 6", and 10" shelf extending over the shelf itself.



SOTO Extended LED

may not occupy the same space as a SOTO 3"W, 6"W, or 10"W shelf. The angle of the extended arm will not extend over the shelf.

Rail mounted SOTO LEDs will fit in front of c:scape privacy screens.

Surface Materials

Housing • 4231 Arctic White · 4710 Low Gloss Black • 47

Rai whe Bla hou • Pa

Rai whe Whi selected 4799 Platinum

Freestanding base

Paint to match housing

Cord · Black plastic only **Photometric Data**

'99 Platinum	÷	12
I-mount brackets en 4710 Low Gloss ck or 4799 Platinum ising is selected aint to match housing		9' 6' 3'
Ŭ	:	С
I-mount brackets en 4231 Arctic ite housing is	· · ·	3' 6'

			SOTO		laximur rksurface		nance			
12"	9	13	17	19	0	19	17	13	10	
9"	12	17	24	28	33	28	25	19	13	
6"	15	23	33	41	48	41	34	24	16	
3"	17	26	39	51	58	53	41	28	18	
CL	18	27	40	53	74	55	49	29	23	
3"	16	25	36	47	51	48	38	26	17	
6"	14	20	28	35	51	35	29	21	15	
9"	11	15	20	24	26	24	20	16	11	
12"	8	11	14	16	23	16	14	11	8	
	12"	9"	6"	3"	CL	3"	6"	9"	12"	

Worksurface front

Tip: Photometric data applies to all SOTO LED lights.

Lighting

SOTO LED Lights

Tip: Rail-mounted bracket of Need help? SOTO LED may occupy the Product deta same space as a SOTO 3", 6", and 10" shelf extending over the shelf itself.

Standard Includes

Task light and mounting bracket: paint
4-watt LED 3500K

• 9' low voltage modular cord: black plastic only

Required to Specify

1 Style number 2 Paint color number for light: 4231 Arctic White 4710 Low Gloss Black 4799 Platinum

Dime	ension	s	·Weight	• Style	·U.S.	
D	W	н		Number	Price	
Rail·	Mou	nted	•			
Rail - 12 ³ /4"	• Mou	14 ¹ /4"	0.6 lb	DSLEDR	\$295	

4 Tip: Rail mounted SOTO LEDs will fit in front of c:scape privacy screens.



Freestanding

Product details,

page 90

123/4" 41/4" 143⁄4" 2.2 lb DSLEDF \$321



SOTO Extended LED Lights

Tip: SOTO Extended LED Need help? may not occupy the same space as a SOTO 3"W, 6"W, or 10"W shelf. The angle of the extended arm will not extend over the shelf. Mount next to shelf or slatwall.



Tip: Rail mounted SOTO LEDs will fit in front of c:scape privacy screens.



- Er	000	ton	e i i	
_		tan		

Product details,

page 90

21³⁄4" 41⁄4" **1**4¾/4" 2.3 lb DSLEDEF \$374



Details Specification Guide


Standard Includes

- Task light and mounting bracket: paint
- 4-watt LED 3500K
- 9' low voltage modular cord: black plastic only
- **Required to Specify**
- 1 Style number 2 Paint color number for light:
- 4231 Arctic White 4710 Low Gloss Black
- 4799 Platinum

Dime D	ension: W	s H	·Weight	• Style Number	·U.S. Price	
Rail	-Moui	nted		·		
21 1/4"	1 ¹ /2"	14 ¹ /4"	0.7 lb	DSLEDER	\$348	



Mini SOTO and Mini SOTO Extended LED Lights

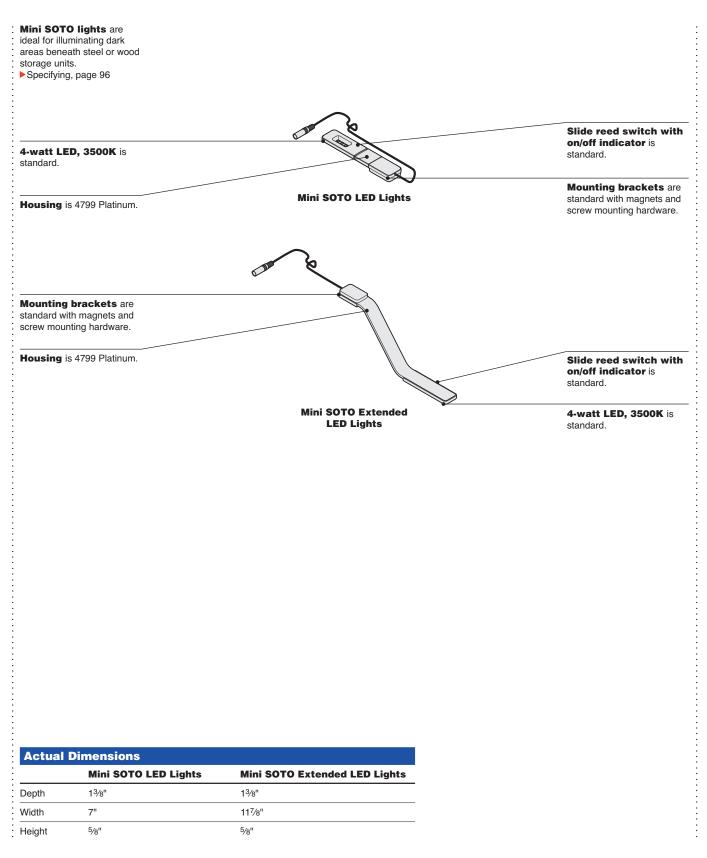

Product Details

Mini SOTO LED lights are 110 volt, mercury free, and have a color rendering index of 80.

Average rated lamp life of Mini SOTO LED light is 50,000 hours.

Power supply uses a modular cord with standard two prong plug, and integrated 9' low voltage cord and connector to attach to light.

SOTO LED lights are U.L. and c.U.L. listed.

Surface Materials

Housing and mounting brackets • 4799 Platinum

Cord

· Black plastic only

Pho	tomet	ric Da	ta							
			Mini SO		Maxim rksurface		minanc	e		
12"	9	13	17	19	0	19	17	13	10	
9"	12	17	24	28	33	28	25	19	13	
6"	15	23	33	41	48	41	34	24	16	
3"	17	26	39	51	58	53	41	28	18	
CL	18	27	40	53	74	55	49	29	23	
3"	16	25	36	47	51	48	38	26	17	
6"	14	20	28	35	51	35	29	21	15	
9"	11	15	20	24	26	24	20	16	11	
12"	8	11	14	16	23	16	14	11	8	
	12"	9"	6"	3" Wo	CL rksurface	3" front	6"	9"	12"	

Tip: Photometric data applies to all Mini SOTO LED lights.

Lighting

Details Specification Guide

Mini SOTO LED Light



Standard Includes

Required to Specify

Style number

Need help? Product details, page 94

Task light and mounting bracket: 4799 Platinum
4-watt LED 3500K • 9' low voltage modular cord: black plastic only

Dime	ension	s	 Weight 	• Style	•U.S.	
)	W	н		Number	Price	
			:	:	:	
8"	7"	5/8"	0.3 lb	LMINILED	\$236	



Mini SOTO Extended LED Light



		-		and the second	and a	
5	em	661	76 L	ncl	1161	es

Required to Specify

Style number

- Need help? Product details, page 94
- Task light and mounting bracket: 4799 Platinum
 4-watt LED 3500K


• 9' low voltage modular cord: black plastic only

Spe	cifica	tion l				
Dim D	ensions W	; H	·Weight	• Style Number	•U.S. Price	
			:	• •		
1³⁄8" :	117⁄8"	5⁄8"	0.5 lb		\$260 :	



Details Specification Guide

Elsa Task Lights

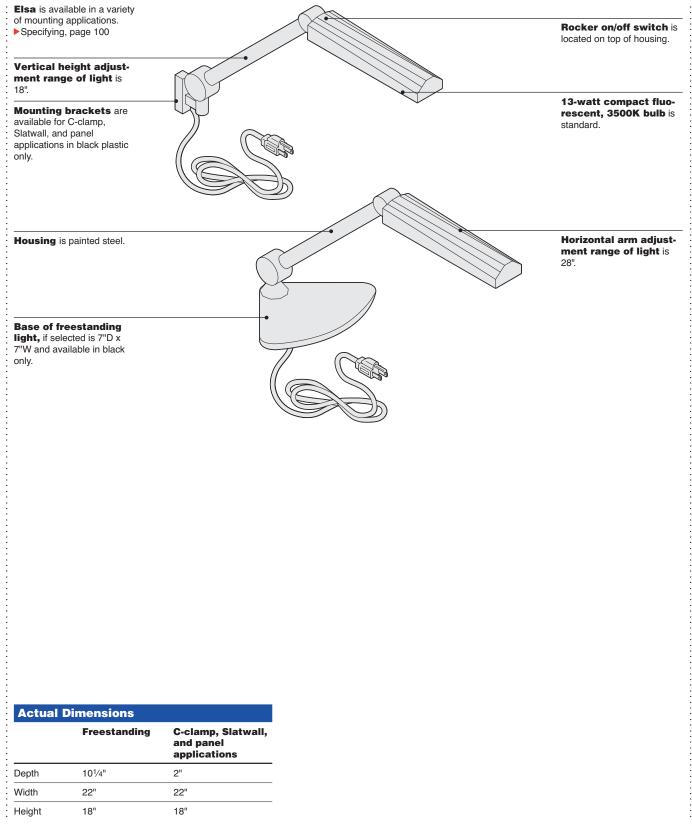

Lighting

Product Details

Elsa light is 110 volt and has a color rendering index of 82.

Average rated lamp life of Elsa light is 10,000 hours.

Power supply uses a modular cord with standard three prong plug and 9' cord.

Head rotation is 330° and arm rotation is 360°.

Elsa light is U.L. and CSA listed.

Connections



Panel mount light cannot be used in a corner application.

Surface Materials

Housing


7018 Pewter7021 Dark Champagne

7027 Charcoal

Base, C-clamp, and mounting brackets • Black paint only

Cord

· Black plastic only

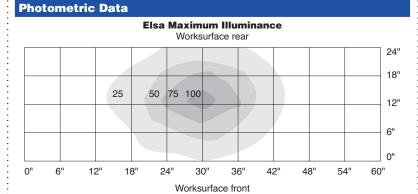

Tip: Photometric data applies to all Elsa lights.

Elsa Task Lights 🔀4/16


Prodi page		, .	9' modular cord only	t fluorescent lamp with standard 3-prong and mounting bracket		1 Style number 2 Paint color number for light: 7018 Pewter 7021 Dark Champagne 7027 Charcoal
	iensions W		·Weight	• Style Number	·U.S. Price	
Par	el-Mou	inted				
For	Use with	Answ	er and Kick			
2" :	22"	18"	4 lb	LELSAN 24/16	\$299 :	
For	Use with	Aveni	ir			
2" :	22"	18"	4 lb	LELSA 14/16	\$299 :	
For	Use with	Elect	ive Elements			
2"	22"	18"	4 lb		\$299 :	
For	Use with	Serie	s 9000			
2"	22"	18"	4 lb	LELS9 24/16	\$299	
Slat	twall M	lount				
2"	22"	18"	4 lb		\$299	



Tip: Panel mount light c not be used in a corner application.



2" 22" 18" 4 lb LELSCP 14/16 \$299



Freestanding

101/4" 22" 18" 12 lb LELSF 14/16 \$346



₩4/16 = Last order entry April 17, 2016

Pisa Task Light

Pisa light available in free- standing application only. ▶ Specifying, page 104		
Shade is 81/2" in diameter.	· \	
		\backslash
		60-watt incandescent, 2850K bulb is standard.
Vertical height of light s 21".		Rocker on/off switch is located on the stem of light.
Stem is painted to match base.		
		Horizontal arm adjust- ment range of light is +/- 20° in any direction.
Base is 6" in diameter and available in paint.		
Actual Dimensions Depth 6" Width 6"		

Lighting

Product Details

Pisa light is 110 volt and has a color rendering index of 100.

Average rated lamp life of Pisa light is 1,500 hours.

Power supply uses standard two prong plug with $6^{1}/2^{"}$ cord.

Pisa light rotates 20° at base in any direction and shade tilts around lamp.

Pisa light is U.L. and CSA listed.

Surface Materials


Base and stem


- 0835 Black
- · 4231 Arctic White
- 7018 Pewter

Shade

- 0835 Black
- 4231 Arctic White7018 Pewter
- 7055 Metallic Red
-
- Cord

· Black plastic only

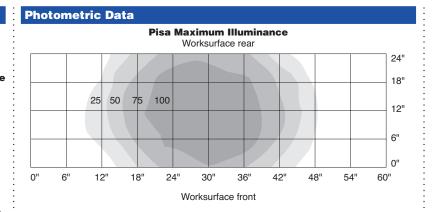



Pisa Task Light 🔀4/16

Need help?

page 102

Product details,

20

	-	 	
and			96

- Task light base and stem: paintShade: paint
- 60-watt incandescent lamp
- 6¹/2" cord with standard 2-prong plug: black plastic only

Required to Specify

- 1 Style number
- 2 Paint color number for base and stem: 0835 Black
- 4231 Arctic White 7018 Pewter
- 3 Paint color number for shade:
- 0835 Black
- 4231 Arctic White 7018 Pewter
- 7055 Metallic Red

Sp	Specification Information								
• Din D	nension W	ns H	• Weight	• Style Number	·U.S. Price				
6"	6"	21"	4 lb	LPISA 14/16	\$172				
•				•					



⊠4/16 = Last order entry April 17, 2016

PowerPincher with Occupancy Sensor

PowerPincher with Occupancy Sensor

Lighting

Specifying,	page 106			Product Details
		C . R	Passive inferred occu- pancy sensor detects slight motions within a	Sensor can be positioned under worksurface, storag or on wall up to 9' away fro outlet.
outlets with s Six outlets a	cher has eight surge protection. re controlled by wo outlets are		Rocker on/off switch is located on the top of the	PowerPinch outlet car be mounted under worksurface. Sensor is standard with
ncontrolled.			powerstrip.	110 volt.
				Sensor time delay can be adjusted from 1 to 30 minutes.
				Power supply uses a 7 th cord with standard three prong plug.
				PowerPincher is U.L. a CSA listed.
				Connections PowerPincher swivel base allows user to easily aim sensor.
				Surface Materials
				Cord • Black plastic only
				•
ctual [Dimensions			· · ·
epth	3 ³ /4"			
/idth	91/2"			•

105

PowerPincher with Occupancy Sensor

Need help? Product details,

page 105



Standard Includes

Required to Specify

Style number

8 outlet power strip with occupancy sensor: gray only
Mounting hardware

• 7'8" cord with standard 3-prong plug: black plastic only

• Dim	ension	s	 Weight 	• Style	•U.S.	
D	w	н		Number	Price	
3 ^{3/4"}	91/2"	1 ¹ /2"	2.5 lb	PPS6SP	\$170	



Computer Support Tools



Basics of Ergonomics Computer Support Tools	120
Basics of Monitor Arm Positioning	121
Keyboard Support Basics	122
How to Specify a Keyboard Assembly	124
Mechanisms and Tracks, Keyboard Platforms, Modular Options, Palm Rests, and Assemblies	
Understanding	126
Specifying	136
Technology Worktools and Cable Management	
Understanding	174
Specifying	178
Flat Panel Monitor Arms and Supports	184
Eyesite	
Understanding	186
Specifying	190
CF Series	
Understanding	212
Specifying	216
FYI	
Understanding	224
Specifying	227
Volley	
Understanding	234
Specifying	237

Statement of Line

Mechanisms with Tracks



Stella Standard Mechanism with

20" Track

Page 128

Specifying

Page 136

Understanding



Stella Extended Mechanism with 23" Track Understanding Page 128 Specifying Page 136



Mechanisms without Tracks



Stella Standard Mechanism Specifying Page 137



Stella Extended Mechanism Specifying Page 138



5" Lift and Lock Mechanism Specifying ▶ Page 138

5" Lift and Lock

Mechanism with

23" Track

Page 129

Specifying

▶ Page 136

Understanding



7" Lift and Lock Mechanism Specifying Page 138

7" Lift and Lock

Mechanism with

26" Track

Page 129

Specifying

Page 137

Understanding



Dial Indicator6 Mechanism with 23" Track Understanding > Pages 130 Specifying > Page 137



Dial Indicator6 Mechanism Specifying ▶ Page 139

								Understanding Page 126 Specifying Page 139 	
Tracks									
11"L	12"L	17"L	18"L	20"L	22"L	23"L	26"L		
•	•	•	•	•	•	•	•		

Keyboard Platforms



Slider Keyboard Platforms Understanding ▶ Page 131 Specifying ▶ Page 140

Understanding

▶ Page 133

Specifying

▶ Page 143



Jules Keyboard Platforms Understanding ▶ Page 131 Specifying ▶ Page 141



26" Keyboard Platform **19" Keyboard Platform** Understanding Page 134 Specifying Page 144



17" and 21" Diagonal **Keyboard Platforms** Understanding ▶ Page 132 Specifying ▶ Page 141



19" Keyboard Platform with Articulating Mouse Understanding Page 134 Specifying Page 145



18" Radius Keyboard Platform Understanding ▶ Page 132 Specifying ▶ Page 142



Enviro Platform Understanding ▶ Page 135 Specifying ▶ Page 146



Classic Rectangular Platform Understanding ▶ Page 133 Specifying ▶ Page 142



FrameOne/c:scape Platform Understanding ▶ Page 135 Specifying ▶ Page 147

Freestanding and Slider Palm Rests



Standard Adjustable Foam Palm Rest Specifying ▶ Page 148



Deeper Adjustable Foam Palm Rest Specifying ▶ Page 148



Cushioned **Replacement Pad** Specifying ▶ Page 148



Slider Platform Mousing Surface Palm Rest Specifying ▶ Page 149

19" and 26" Green-Gel Palm Rests

19" Green-Gel **Palm Rest** Specifying ▶ Page 149



26" Green-Gel Palm Rest Specifying ▶ Page 150

Tip: 19" palm rest is for use with 19", 26", Enviro, and FrameOne/c:scape keyboard platforms. 26" palm rest is for use with 26" keyboard platform only.

Computer Support Tools

Statement of Line, continued

Classic Rectangular Platform Palm Rests

Full-Width, Fixed-Height Palm Rest Specifying ▶ Page 150



Full-Width, Height-Adjustable Palm Rest Specifying Page 150



Positionable Palm Rest Specifying ▶ Page 151

Extended Foam Palm Rest

Specifying

Page 151

Jules Platform Palm Rest

Radius and Diagonal Platform Palm Rest

Standard Foam Palm Rest Specifying Page 151

Stella Standard Keyboard Assemblies



Slider Keyboard Platform with Stella Standard Mechanism Understanding Page 122 Specifying Page 152

19" Keyboard Platform

with Stella Standard

Mechanism

Understanding

▶ Page 122

Specifying

Page 152



Jules Keyboard Platform with Stella Standard Mechanism Understanding Page 122 Specifying Page 152



Enviro Keyboard Platform with Stella Standard Mechanism Understanding > Page 122 Specifying > Page 152



Diagonal Keyboard Platform with Stella Standard Mechanism Understanding Page 122 Specifying Page 152



Radius Keyboard Platform with Stella Standard Mechanism Understanding > Page 122 Specifying > Page 152



Classic Rectangular Keyboard Platform with Stella Standard Mechanism Understanding Page 122 Specifying Page 152



26" Keyboard Platform with Stella Standard Mechanism Understanding Page 122 Specifying Page 152

April 2015



FrameOne/c:scape Keyboard Platform with Stella Standard Mechanism Understanding Page 122 Specifying Page 152

Stella Extended Keyboard Assemblies



Slider Keyboard Platform with Stella Extended Mechanism Understanding > Page 122 Specifying > Page 157



Jules Keyboard Platform with Stella Extended Mechanism Understanding Page 122 Specifying Page 157




Platform with Stella Extended Mechanism Understanding Page 122 Specifying Page 157




Radius Keyboard Platform with Stella Extended Mechanism Understanding ▶ Page 122 Specifying ▶ Page 157




Classic Rectangular Keyboard Platform with Stella Extended Mechanism Understanding Page 122 Specifying Page 157



19" Keyboard Platform with Stella Extended Mechanism Understanding > Page 122 Specifying > Page 157



Enviro Keyboard Platform with Stella Extended Mechanism Understanding Page 122 Specifying Page 157




26" Keyboard Platform with Stella Extended Mechanism Understanding > Page 122 Specifying > Page 157

5" Lift and Lock Keyboard Assemblies




Slider Keyboard Platform with 5" Lift and Lock Mechanism Understanding > Page 122 Specifying > Page 161



19" Keyboard Platform with 5" Lift and Lock Mechanism Understanding Page 122 Specifying Page 161



Jules Keyboard Platform with 5" Lift and Lock Mechanism Understanding > Page 122 Specifying > Page 161



Enviro Keyboard Platform with 5" Lift and Lock Mechanism Understanding > Page 122 Specifying > Page 161



Diagonal Keyboard Platform with 5" Lift and Lock Mechanism Understanding > Page 122 Specifying > Page 161



26" Keyboard Platform with 5" Lift and Lock Mechanism Understanding Page 122 Specifying Page 161



Radius Keyboard Platform with 5" Lift and Lock Mechanism Understanding > Page 122 Specifying > Page 161



Classic Rectangular Keyboard Platform with 5" Lift and Lock Mechanism Understanding Page 122 Specifying Page 161

7" Lift and Lock Keyboard Assemblies



Slider Keyboard Platform with 7" Lift and Lock Mechanism Understanding ▶ Page 122 Specifying Page 165

Mechanism

Understanding

Page 122

Specifying

Page 165



Jules Keyboard Platform with 7" Lift and Lock Mechanism Understanding ▶ Page 122 Specifying ▶Page 165



Enviro Keyboard 19" Keyboard Platform with 7" Lift and Lock ▶ Page 122 Specifying ▶ Page 165

Dial Indicator6 Keyboard Assemblies



Diagonal Keyboard

Understanding

▶ Page 122

Specifying

Page 165

Platform with 7" Lift

and Lock Mechanism

Platform with 7" Lift and Lock Mechanism




26" Keyboard Platform with 7" Lift and Lock Mechanism Understanding ▶ Page 122 Specifying ▶ Page 165



Radius Keyboard Platform with 7" Lift and Lock Mechanism Understanding Page 122 Specifying Page 165



Classic Rectangular Keyboard Platform with 7" Lift and Lock Mechanism Understanding ▶ Page 122 Specifying ▶ Page 165









Radius Keyboard Platform with Dial Indicator6 Mechanism Understanding Page 122 Specifying

Page 169



Classic Rectangular Keyboard Platform with Dial Indicator6 Mechanism Understanding ▶ Page 122 Specifying ▶ Page 169




Slider Keyboard Platform with Dial **Indicator6 Mechanism** Understanding ▶ Page 122 Specifying Page 169



19" Keyboard Platform with Dial Indicator6 Mechanism Understanding ▶ Page 122 Specifying Page 169



Jules Keyboard Platform with Dial **Indicator6 Mechanism** Understanding ▶ Page 122 Specifying ▶ Page 169



Enviro Keyboard Platform with Dial Indicator6 Mechanism Understanding ▶ Page 122 Specifying ▶ Page 169



Diagonal Keyboard

Platform with Dial

Understanding

▶ Page 122

Specifying

Page 169

Indicator6 Mechanism

26" Keyboard Platform with Dial Indicator6 Mechanism Understanding ▶ Page 122 Specifying ▶ Page 169

Technology Worktools and Cable Management



Corner Filler Understanding Page 174 Specifying Page 178

CPU Cradle for Mini

Processors

Understanding

▶ Page 175

Specifying

▶ Page 180



Freestanding In-Line Document Support Understanding Page 174 Specifying Page 178



Vertical Locking CPU Cradle Understanding Page 175 Specifying Page 180



Monitor Blocks Understanding Page 174 Specifying Page 179

Vertical Non-Locking

CPU Cradle

Understanding

Page 175 Specifying

▶ Page 180



Adjustable Foot Rest Understanding Page 174 Specifying Page 179

Vertical Processor

Freestanding Sling

Understanding

▶ Page 176

Specifying

▶ Page 181



Mobile Collapsible Laptop Support Understanding Page 175 Specifying Page 179



Vertical Processor Fixed Sling Understanding Page 176 Specifying Page 181





Slatwall/SlatRail Mounted CPU Cradle Understanding Page 176 Specifying Page 182 Vertical Cable Carrier Understanding Page 176 Specifying Page 182




Cableways Understanding Page 177 Specifying Page 183

Statement of Line, continued

Eyesite Flat Panel Monitor Arm Support Assemblies




Eyesite Single Display Support Understanding Page 186 Specifying Page 190



Eyesite Static Two-Over-Two Display Support Understanding > Page 186 Specifying > Page 198




Eyesite Adjustable Dual Display Support Understanding > Page 186 Specifying > Page 192



Eyesite Static Three-Over-Three Display Support Understanding > Page 186 Specifying > Page 200

Tip: Mounting brackets included.



Eyesite Static Triple Display Support Understanding Page 186 Specifying Page 194



Eyesite Static One-Over-One Display Support Understanding Page 186 Specifying Page 196



Eyesite Single Laptop Support Understanding Page 186 Specifying Page 202



Eyesite Dual Laptop Support Understanding Page 186 Specifying Page 204

Eyesite Modular Components



Single Arm Understanding Page 184 Specifying Page 206



Single Arm with Laptop Support Understanding Page 186 Specifying Page 206



Dual Static Yoke Understanding ▶ Page 186 Specifying ▶ Page 206



Dual Adjustable Yoke Understanding Page 186 Specifying Page 206

Computer Support Tools

Eyesite Modular Components, continued Triple Static Yoke 12"H Standard Crank 18"H Extended Crank 26"H Extended Static Laptop Component Understanding Column Column Column Understanding ▶ Page 186 Understanding Understanding Understanding ▶ Page 186 Specifying Page 186 ▶ Page 186 Specifying ▶ Page 186 Page 206 Specifying Specifying Specifying ▶ Page 208 ▶ Page 207 Page 207 ▶ Page 207 **VESA Bracket/Hook VESA Bracket** Understanding **Assembly - Slide** ▶ Page 186 Understanding Page 186 Specifying

Tip: 26"H extended static column must be used for two-over-two and three-over-three applications.

Specifying Page 208

Eyesite Extended Static Column



Eyesite Mounting Brackets



Page 208

C-clamp Bracket Understanding Page 186 Specifying Page 210





FrameOne Bracket Understanding Page 186 Specifying Page 210



c:scape Bracket— Desk Only Understanding Page 186 Specifying Page 210

Bivi Bracket Understanding ▶ Page 186 Specifying ▶ Page 210

Statement of Line, continued

CF Series Flat Panel Monitor Arms and Supports



Light-Duty Arms Understanding Page 212 Specifying Page 216



Dual Flat Panel Monitor Pole Mount with Arm Understanding Page 212 Specifying Page 217



Through-Mount Understanding ▶ Page 212 Specifying ▶ Page 220



Maximum-Duty Arm Bracket Understanding Page 212 Specifying Page 220

() 6" |

6" Flat Panel Arm Extender Understanding Page 212 Specifying Page 222



Standard Arm Understanding Page 212 Specifying Page 216

Pole Mount Without

Desk-Clamp/Grommet/

Through-Mount

FrameOne Bracket

Wall-Mount Support

Understanding

Page 212 Specifying

▶ Page 222

Understanding

▶ Page 212

Specifying

▶ Page 221

Bracket

Understanding

▶ Page 212

Specifying

▶ Page 220

Arm

Understanding

▶ Page 212

Specifying

▶Page 218



Heavy-Duty Arm Understanding Page 212 Specifying Page 216



Maximum-Duty Arm Understanding Page 212 Specifying Page 216



Dual Flat Panel Pole Arm Understanding Page 212 Specifying Page 219

Slatwall Bracket Understanding Page 212



Single Flat Panel Monitor Pole Mount with Arm Understanding Page 212 Specifying Page 217



Desk-Clamp/Grommet Understanding > Page 212 Specifying > Page 220

SlatRail Bracket

Understanding Page 212 Specifying Page 220



Dual-Bar Bracket
Understanding
Page 212
Specifying
Page 221

Single Flat Panel Pole Arm Understanding Page 212 Specifying Page 219

pb

Wall/Reverse Wall Mount Bracket Understanding Page 212 Specifying Page 220



c:scape Bracket Understanding Page 212 Specifying Page 221



Specifying

Page 220

T-Shape Dual Base Bracket Understanding Page 212 Specifying Page 221



LED Monitor Lights with Bracket Understanding Page 212 Specifying Page 223

April 2015

FYI Flat Panel Monitor Arms and Supports



FYI Single Flat Panel Monitor Arm with **Mounting Brackets** Understanding ▶ Page 224 Specifying ▶ Page 227



FYI Flat Panel Monitor Arm without Mounting Bracket Understanding ▶ Page 224 Specifying ▶ Page 229



FYI Dual Flat Panel Monitor Arms with Mounting Brackets Understanding ▶ Page 224 Specifying ▶ Page 228



FYI Upper Arm Understanding
Page 224 Specifying Page 229



FYI Tilt/Pan Only Understanding ▶ Page 225 Specifying ▶ Page 230



Wall Mount Bracket Understanding ▶ Page 225 Specifying ▶ Page 230



Slatwall/SlatRail Bracket Understanding Page 225 Specifying ▶ Page 230

FYI Sync Flat Panel Monitor Arms and Supports



FYI Sync Upper Monitor Arm Understanding ▶ Page 225 Specifying ▶ Page 231



LED Monitor Lights with Bracket Understanding ▶ Page 225 Specifying Page 232



FYI Sync Lower Monitor Arm Understanding Page 225 Specifying ▶ Page 231



FYI Sync Lower Monitor Arm with Slatwall/SlatRail Mount Understanding ▶ Page 225 Specifying ▶ Page 231



FYI Monitor Handle For Use with Sync Understanding ▶ Page 225 Specifying ▶ Page 231

66063

FYI Sync Hardware Pack Understanding ▶ Page 225 Specifying ▶ Page 231

Computer Support Tools

Statement of Line, continued

Volley Flat Panel Monitor Arms




Volley Flat Panel Monitor Arms with C-clamp/Through-Mount Brackets Understanding Page 234 Specifying Page 237



Volley Flat Panel Monitor Arms with Slatwall/SlatRail Brackets Understanding Page 234 Specifying Page 237

Statement of Line

Basics of Ergonomic Computer Support Tools

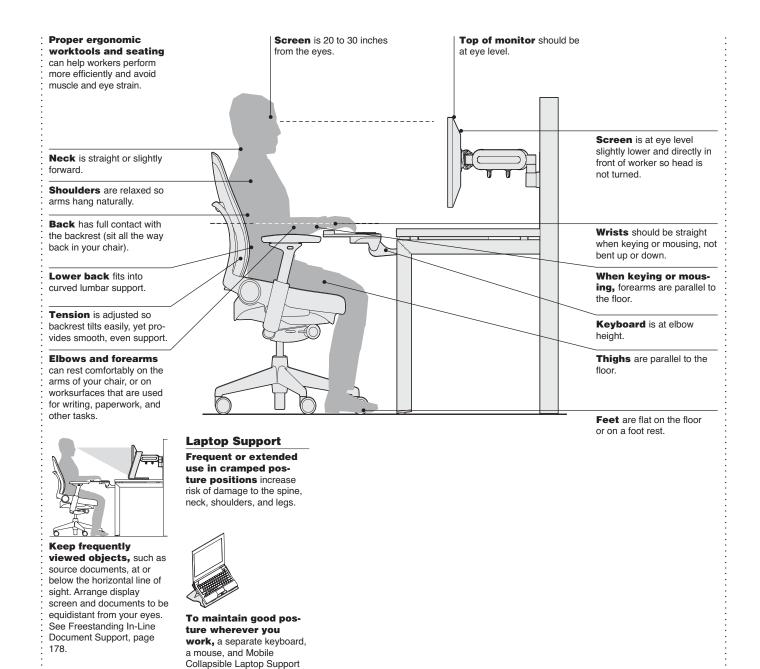

are recommended. See page 179

To reduce eyestrain and unhealthy postures when using

laptops, an external full-

size monitor with external


keyboard and mouse is

recommended.


If worksurfaces and keyboard support are not height-adjustable, raise your chair's seat height to achieve the appropriate relationship to your tasks. If this leaves your feet dangling above the floor, use a foot rest.

►See page 179

Basics of Monitor Arm Positioning

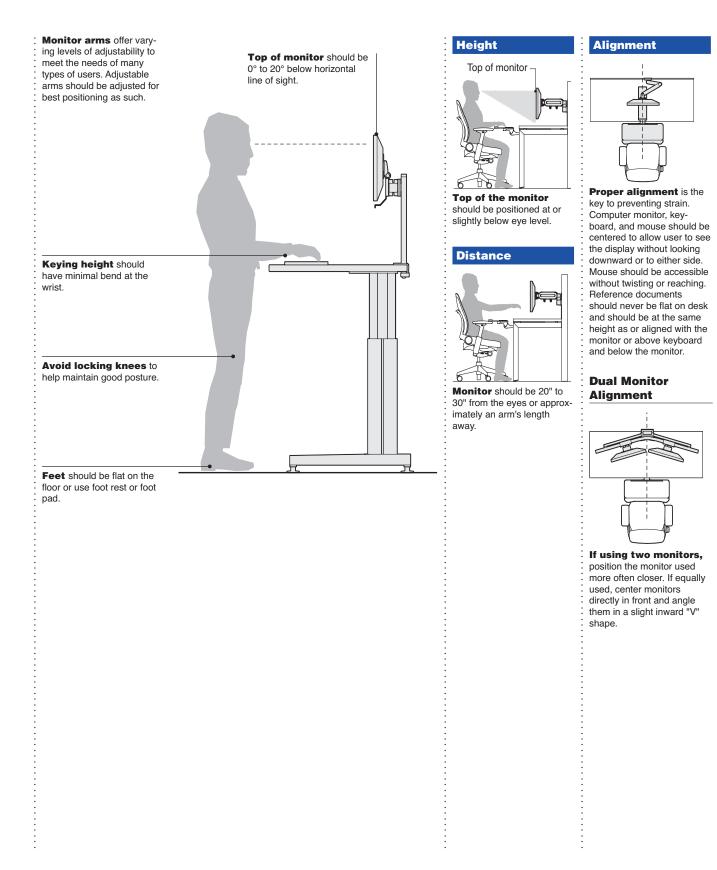

Keyboard Supports Basics

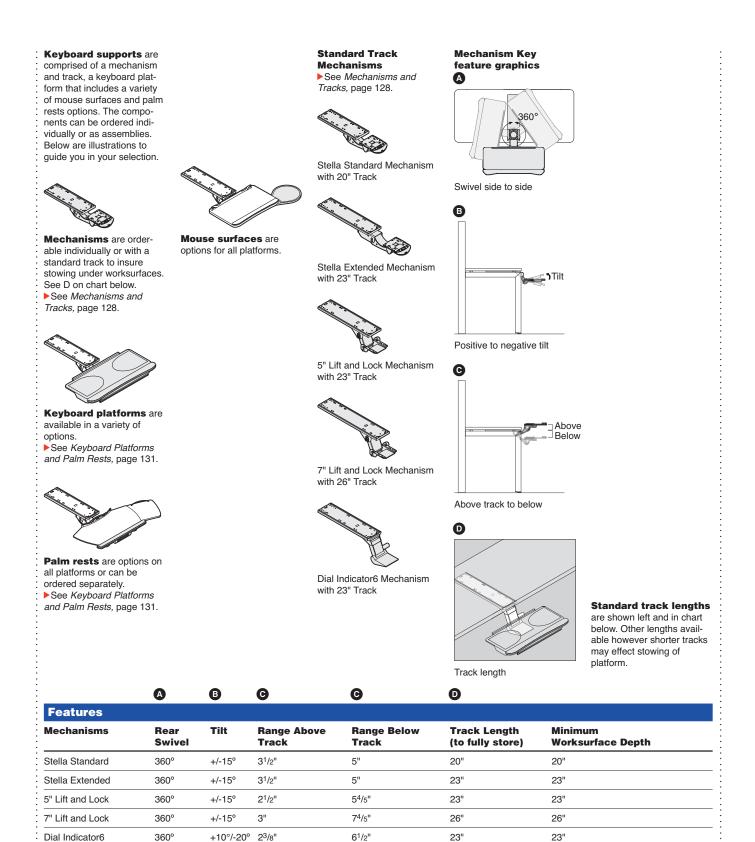

Tip: All mechanisms ship with positive tilt locked out.

Keyboard Supports Basics

How to Specify a Keyboard Assembly

1.	Determine	workstation	configuration -	- straight,	90°,	radius, c	or diagonal

Determine workstation comparation – straight, so , radius, or diagonal
 Measure the depth of clearance on underside of worksurface to attach track to determine track length and mechanism to use.
 Select platform depending on needs of the keyboard size and mouse location preference.

Platforms						
• Features	• Applications	• Required Knee Space Clearance	Palm Rest	Platform		
· · · · · · · · · · · · · · · · · · ·				Depth	Width	Height
Slider	Straight, 21" Diagonal, and 22" Radius	20"W	Without or with adjustable foam	91/2"	20"	2"
Jules	Straight, 17" Diagonal, and 12" Radius	20"W	Without or with standard foam	12"	18 ³ /4"	2 ¹ /2"
Diagonal User's edge	17" and 21" Diagonal	28"W	With extended foam	12 ¹ /2"	271/2"	3/4"
Inside corner				121/2"	17" or 21"	3/4"
Radius	18" Radius	28"W	With extended foam	14"	271/2"	3/4"
Classic Rectangular	Straight	28"W	Without or with positionable, full-width/fixed-height, or full-width/adjustable foam	10 ¹ /4"	271/2"	21/2"
26"	Straight	26"W	Without or with 19" or 26" Green-Gel	9 ³ /4"	26"	1/4"
19" with Swivel Mouse	Straight, 17" Diagonal, and 12" Radius	28"W	Without or with 19" Green- Gel Without or with Antimicrobial	93/4"	19"	1/4"
19" with Articulating Mouse <i>Tip: Mouse surface is 2¹/2"H</i> .	Straight, 17" Diagonal, and 12" Radius	21 ¹ /2"W	Without or with 19" Green- Gel Without or with Antimicrobial	93/4"	19"	1/4"
Enviro	Straight, 17" Diagonal, and 18" Radius	28"W	Without or with 19" Green- Gel Without or with Antimicrobial	141/2"	28"	3/4"
FrameOne/c:scape	Straight, 17" Diagonal, and 18" Radius	28"W	Without or with 19" Green- Gel Without or with Antimicrobial	9"	19"	1/4"

Tip: For 12" radius corner applications, specify Jules, 19" or 19" with articulating mouse with an extended mechanism only.

Tip: Recommend using freestanding in-line document support for platforms without standard document slot.


*Platform is standard with integrated mouse surface.

.....

Separate Mouse Surface		• Microsoft Natural • Cord Mana		• Document Slot (20 Sheets)
Depth	Width			
8"	8"	Order without palm rest	•	•
8 ¹ /2"	81/2"	Order without palm rest	•	N.A.
N.A.*	N.A.*	Not recommended	•	•
N.A.*	N.A.*	Not recommended	•	•
N.A.*	N.A.*	Order without palm rest	•	N.A.
N.A.*	N.A.*	Order without palm rest	•	N.A.
9" dia.	N.A.	Order without palm rest	•	N.A.
9" dia.	N.A.	Order without palm rest	•	N.A.
N.A.*	N.A.*	Order without palm rest	•	N.A.
н.д.	IN.A.		•	19.7 V
9" dia.	N.A.	Not recommended	•	N.A.

÷

Mechanisms and Tracks, Keyboard Platforms, Modular Options, Palm Rests, and Assemblies

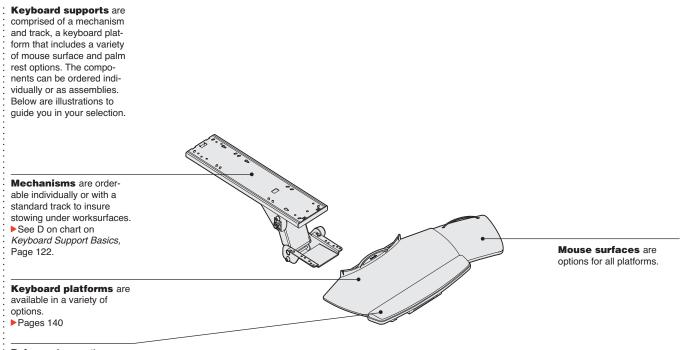



Paim rest are options on all platforms or can be ordered separately.


Details Specification Guide


Mechanisms and Tracks, Keyboard Platforms, Modular Options, Palm Rests, and Assemblies

Mechanisms and Tracks

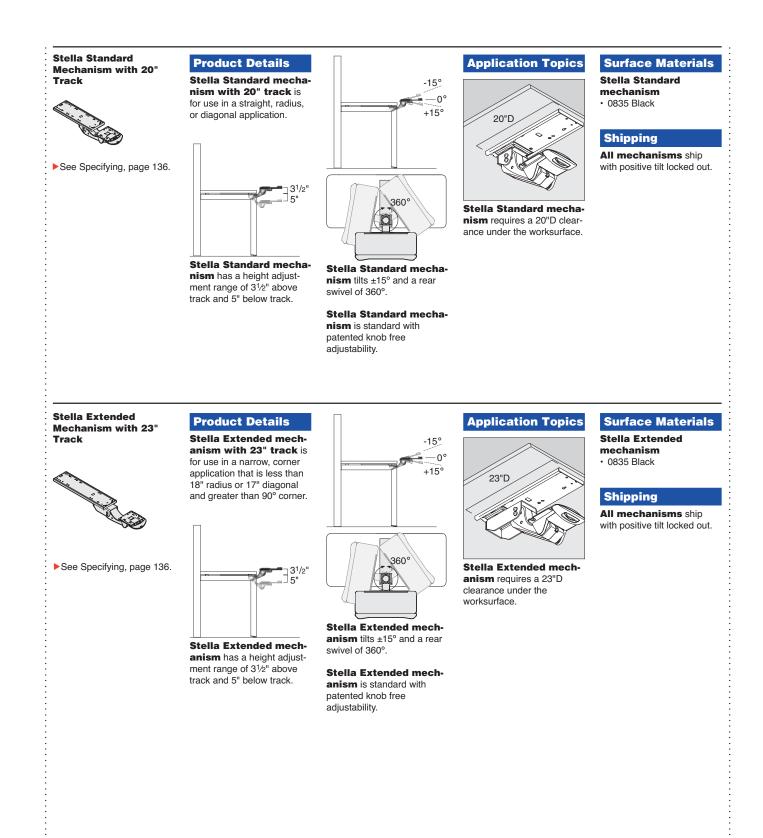

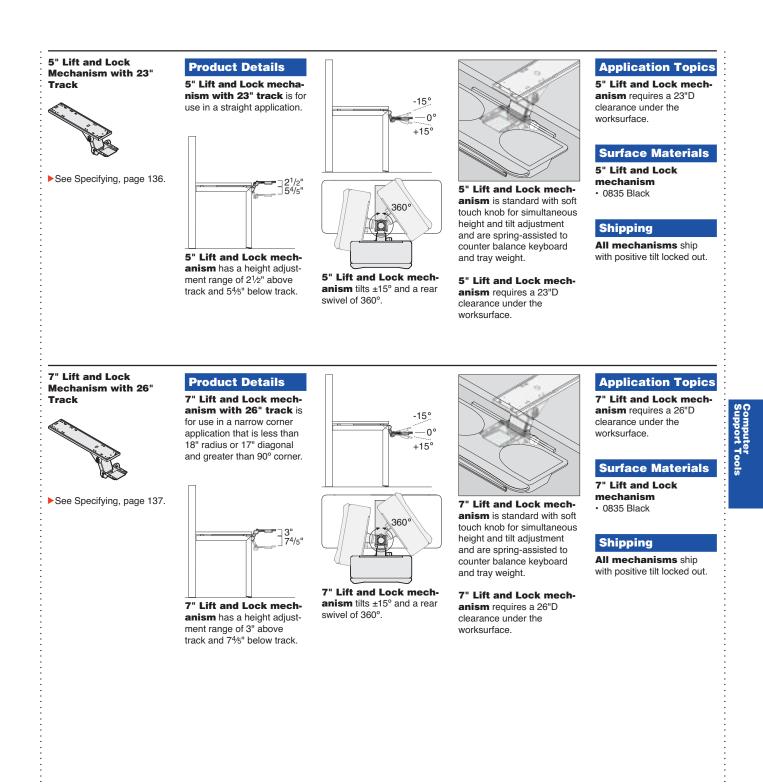


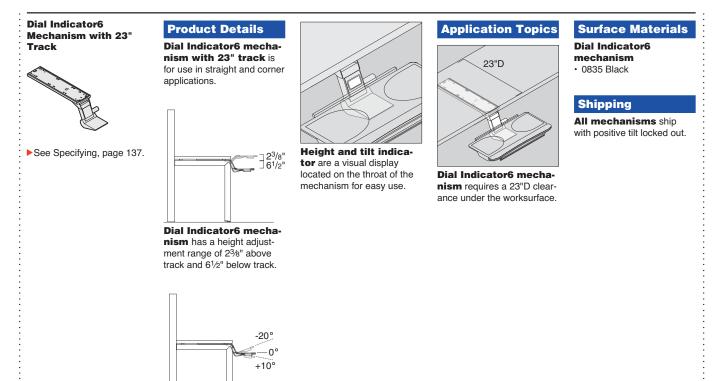






Dial Indicator6 mechanism extends 6" and is standard with a patented dial tilt adjustment of +10/–20° and dual swivel of 360°.


Keyboard Platforms and Palm Rests

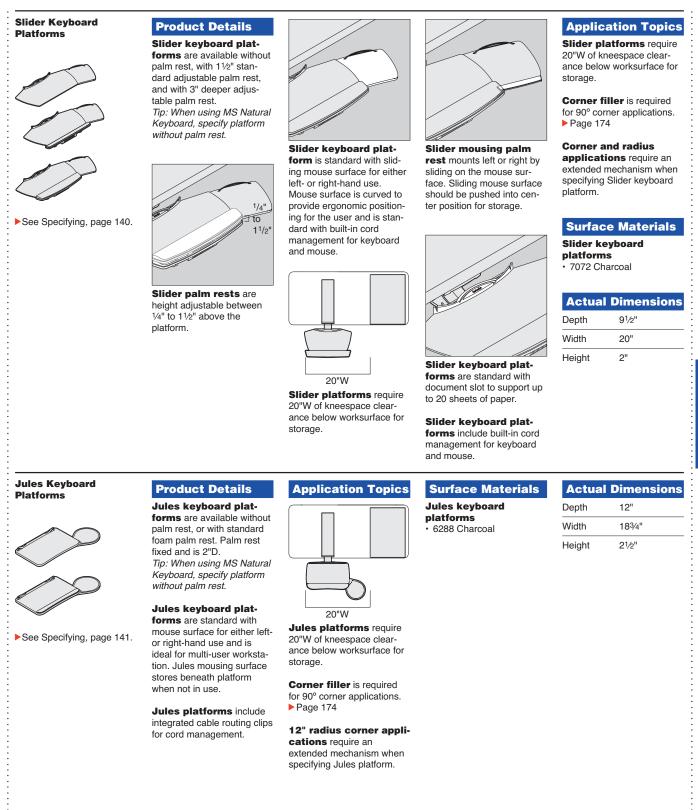

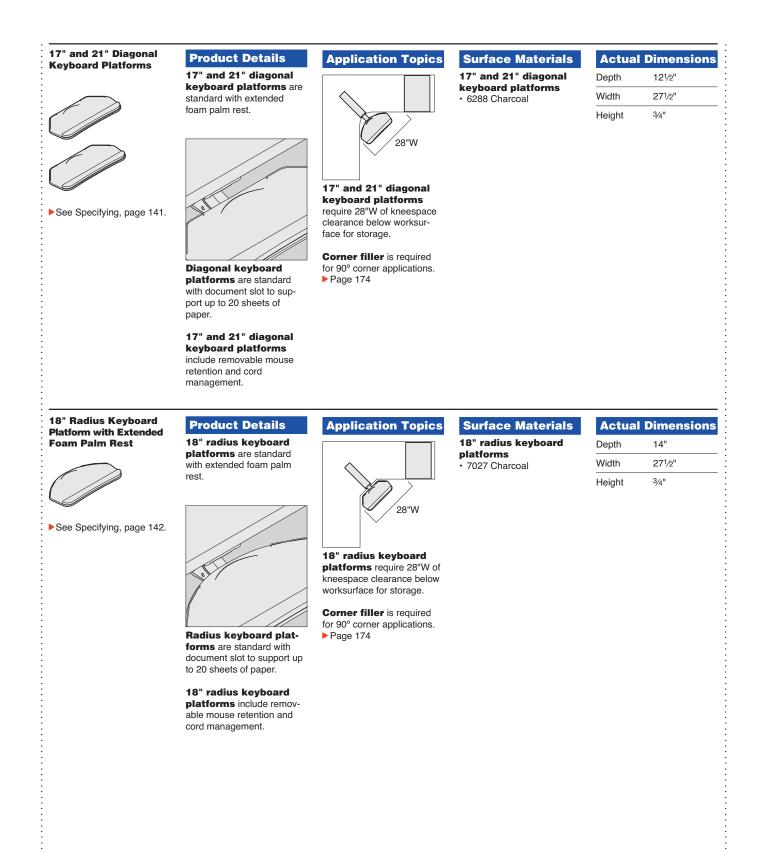


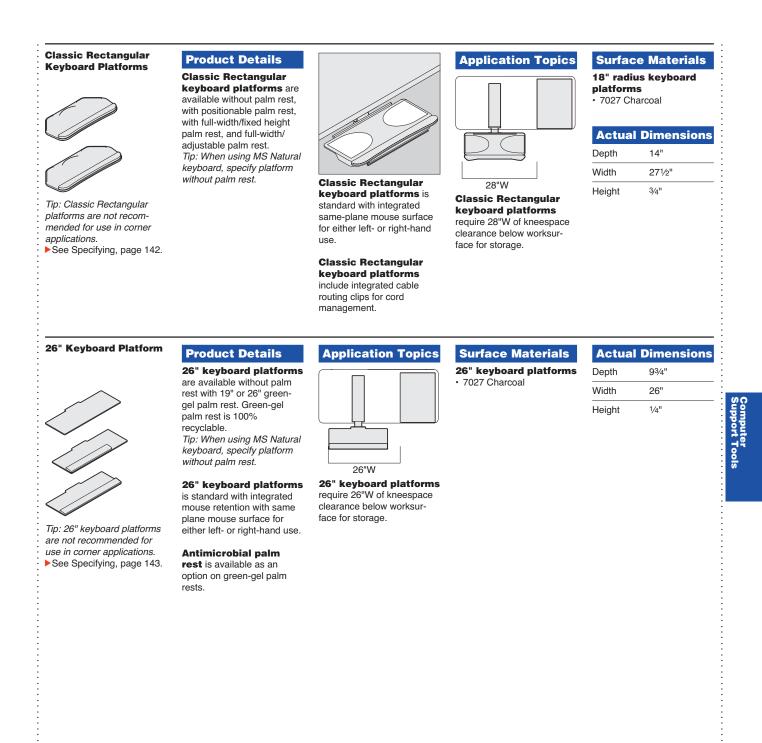

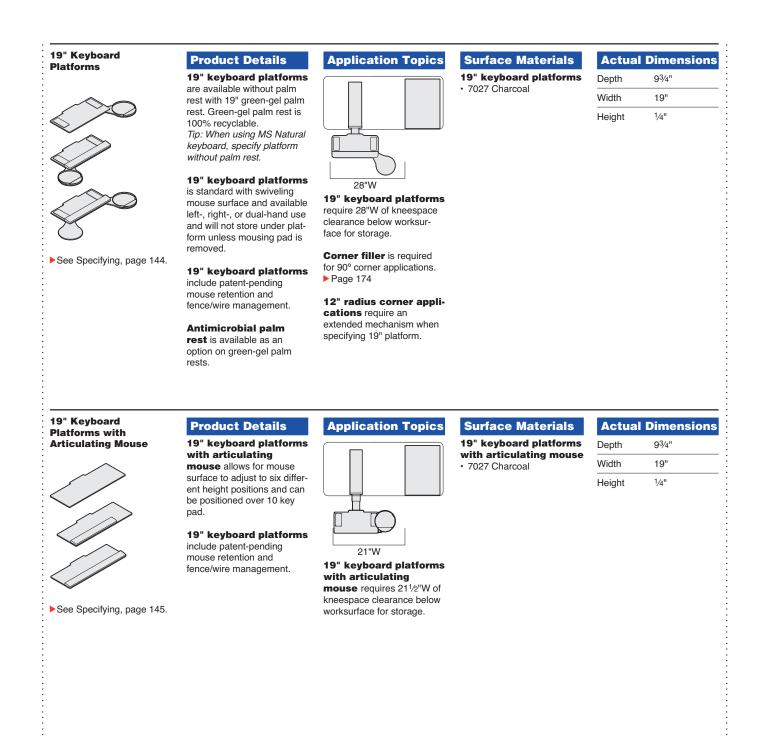

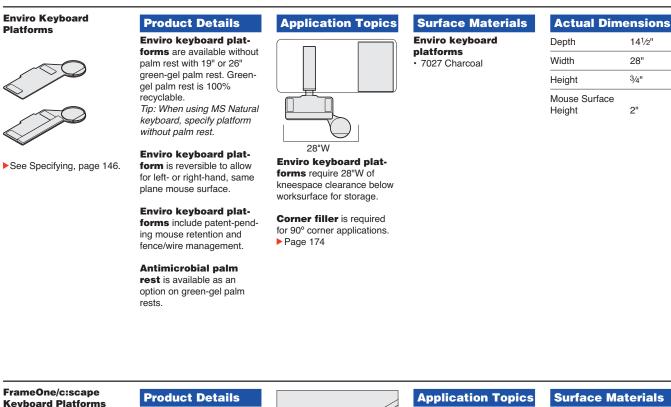

Keyboard Platforms



Tip: FrameOne/c:scape keyboard platform will stow under 30"D FrameOne and c:scape worksurfaces when used with a 17"L track and Stella Standard mechanism.

Tip: FrameOne/c:scape platform will not stow under 24"D FrameOne or c:scape worksurface.


See Specifying, page 147.

FrameOne and c:scape keyboard platforms are available without palm rest or with 19" green-gel palm rest. Green-gel palm rest is 100% recyclable. Tip: When using MS Natural keyboard, specify platform without palm rest.

> FrameOne/c:scape keyboard platforms is standard with swiveling mouse surface and available for left- or right-hand use.

> FrameOne/c:scape keyboard platforms include patent-pending mouse retention and fence/wire management.

Antimicrobial palm rest is available as an option on green-gel palm rests.



FrameOne and c:scape keyboard platforms require 28"W of kneespace clearance below worksurface for storage.

FrameOne and c:scape

keyboard platforms 7027 Charcoal

Actual Dimensions

Depth	9"
Width	19"
Height	1/4"

Mechanisms and Tracks

Stella Standard Mechanism with 20" Track



Tip: Mechanism requires 20"D worksurface clearance.

			Standard I	Required to Specify		
Produ page		δ,	Standard Stella	track: 0835 Black	Style number	
Dim D	nension: W	s H	·Weight	• Style Number	·U.S. Price	
16"	61/2"	6"	15.5 lb	\$\$20	\$297	
			•			

Stella Extended Mechanism with 23" Track



Tip: Mechanism requires 23"D worksurface clearance

Tip: Extended mechanism recommended for less than 18" radius or 17" diagonal applications.

	Standard Includes	Required to Specify
 Need help? Product details, page 128 	Extended Stella mechanism and track: 0835 Black	Style number

5" Lift and Lock Mechanism with 23" Track

151/2" 4"



	Standard I	ncludes		Required to Specify	
Need help? Product details, page 129	• 5" Lift and Lock	mechanism and	track: 0835 Black	Style number	
Specificatio	n Information				
• Dimensions D W H	Weight	• Style Number	·U.S. Price		

\$160

Tip: Mechanism requires 23"D worksurface clearance.

*
For Canadian Pricing
Multiply U.S. Price by the
Canadian price factor.
See page 1 for details.

L523

11.5 lb

21/4"

7" Lift and Lock Mechanism with 26" Track



Tip: Mechanism requires 26"D worksurface clearance.

Tip: Extended mechanism recommended for less than 18" radius or 17" diagonal applications.

			Standard I	nciuaes	Required to Specify	
Need Produ page 1	ct detail		7" Lift and Lock	Style number		
Spe	cifica	ation In	formation			
-	cifica ension		formation •Weight	• Style	·U.S.	
-					·U.S. Price	
Dime	ension W	IS		Style		

Dial Indicator6 Mechanism with 23" Track



Tip: Mechanism requires 23"D worksurface clearance.

			Standard I	Required to Specify		
page 1	ct detai I 30	ils,		mechanism and t	Style number	
_			formation			
• Dime D	W	ns H	• Weight	• Style Number	·U.S. Price	
171/2"	4"	21/4"	8.5 lb	D623	\$233	

Stella Standard Mechanism Only

Need help?

page 128

Product details,



Tip: Mechanism requires a 20"L track to completely store platform under the worksurface.



Required to Specify

Style number

Standard Includes

Attachment hardware

Stella Standard mechanism: 0835 Black

Stella Extended Mechanism Only



Tip: Mechanism requires a 23"L track to completely store platform under the worksurface.

Tip: Extended mechanism recommended for less than 18" radius or 17" diagonal applications.

Need help? Product deta page 128		Extended mechanism: 0835 Black nent hardware	Style number
Specific Weight	ation Inform Style Number	U.S. Price	
15 lb	SE	\$297	

Required to Specify

Required to Specify

Style number

5" Lift and Lock Mechanism Only

		Stan	dard Includes	Required to Specify Style number
P.S.	Need help? Product detai page 129		nd Lock mechanism: 0835 Black nent hardware	
<i>Tip: Mechanism requires a 23"L track to completely</i>	Specific	ation Inform	ation	
store platform under the worksurface.	Weight	• Style Number	·U.S. Price	
	8 lb	L5	\$144	

Standard Includes

· Attachment hardware

• 7" Lift and Lock mechanism: 0835 Black

Standard Includes

7" Lift and Lock Mechanism Only

Need help?

page 129

Product details,



applications.

Tip: Mechanism requires a 26"L track to completely

store platform under the worksurface.

Tip: Extended mechanism recommended for less than 18" radius or 17" diagonal



quired to Spe

Dial Indicator6 Mechanism Only



Tip: Mechanism requires a 23"L track to completely store platform under the worksurface.

	orania	ard includes	Required to specify		
leed help? • Dial Indicator6 mechanism: 0835 Black • Attachment hardware age 129			Style number		
Specificati Weight	on Informa Style Number	tion ·U.S. Price			

Tracks

For Use with Stella Standard, Stella Extended, 5", and 7" Lift and Lock, and Dial Indicator6 Mechanisms

adard Include



Tip: Attachment hardware and end cap not included. Order service part 18711701SR, if required.

Tip: 11"L and 17"L tracks are recommended for use with FrameOne and c:scape 24"D and 30"D worksurfaces.

	Standard Includes	Required to Specify
 Need help? Product details, page 122 	Track: 0835 Black	Style number

Dimensions Length	·Weight	• Style Number	·U.S. Price
	:	:	:
11"	3.5 lb	Q11T	\$17
12"	3.5 lb	Q12T	\$17
17"	3.5 lb	Q17T	\$17
18"	3.5 lb	Q18T	\$17
20"	3.5 lb	Q20T	\$17
22"	3.5 lb	Q22T	\$17
23"	3.5 lb	Q23T	\$17
26"	3.5 lb	Q26T	\$17

Keyboard Platforms

Slider Keyboard Platforms

Tip: Slider keyboard platforms are for use in straight, 21" diagonal, and 22" radius applications. See page 124

▶ Need help? Product details, page 131

Standard Includes · Keyboard platform: 7027 Charcoal paint · Foam palm rest, if selected

• 8"D x 8"W ambidextrous sliding mouse surface

Required to Specify


Style number

Tip: Extended mechanism required for less than 18" radius or 17" diagonal applications.

Tip: Slider keyboard platform required 20"W of kneespace clearance below worksurface.

Tip: When using MS Natural Keyboard, specify platform without palm rest.







 Dimensions 		·Weight	• Style	• U.S.	
D	W	н	•	Number	Price
			:	:	
With	out F	Palm R	lest		
9 ¹ /2"	20"	2"	7 lb	SL1000	\$179
:			:	:	
With	1 ¹ /2	" Stan	dard Adjust	able Palm F	Rest
91/2"	20"	2"	8 lb	SL10SA	\$219
•			:	:	

9¹/2' 8 lb SL10DA 20' 2 \$239



Jules Keyboard Platforms

Tip: Jules keyboard platforms are for use in straight, 17" diagonal, and 18" radius applications. ▶See page 124.

Tip: Extended mechanism required for 12" radius corner applications.

Tip: Jules keyboard platform requires 20"W of kneespace clearance below worksurface.

Tip: For use with MS Natural . Keyboard, specify platform without palm rest.





Standard Includes ▶ Need help? Product details,

page 131

Keyboard platform: 6288 Charcoal plastic

- 81/2"D x 81/2"W ambidextrous, sliding mouse surface
- · Foam palm rest, if selected

Required to Specify

Style number


Dim D	ensions W	H	·Weight	•Style Number	·U.S. Price	
Wit	hout P	alm Re	est			
12"	18 ³ /4"	2 ¹ /2"	3 lb	JP1000	\$ 87	
				•	:	

17" and 21" Diagonal Keyboard Platforms with Extended Foam Palm Rest

Tip: Diagonal platforms are for use in 17" and 21" diagonal applications. ▶See page 124.

Tip: Diagonal keyboard platform require 28"W of kneespace clearance below worksurface.

Tip: Diagonal keyboard platform not recommended for use with MS Natural Keyboard.



▶ Need help? Product details, page 132

Standard Includes Keyboard platform: 6288 Charcoal plastic · Ambidextrous, integrated mouse surface · Foam palm rest

Required to Specify Style number

Specification Information							
Dime D	nsions W	H	·Weight	• Style Number	·U.S. Price		
17" C	Diago	nal Pl	atform				
12 ¹ /2"	27 ¹ /2"	3/4"	7 lb	1710EF	\$161		

21" Diagonal Platform

12¹/2" 271/2" 3/4" 7 lb 2110EF \$161

18" Radius Keyboard Platform with Extended Foam Palm Rest



Tip: Radius keyboard platform is for use in 18" radius application only. See page 124.

Tip: Radius keyboard platform require 28"W of kneespace clearance below worksurface.

Tip: Radius keyboard platform not recommended for use with MS Natural Keyboard.

Need help? Product deta page 132	ails, •	, ,	rm: 6288 Charco ntegrated mouse	Style number	
Specific	ation l	nformation			
Specific		normation			
Specific		normation			
ns		• Weight	• Style Number		
ns			· · · · ·	 U.S. Price	

Required to Specify

cify

Classic Rectangular Keyboard Platforms

Need help? Product detai page 133

Tip: Classic Rectangular
keyboard platforms are for
straight applications only.
See page 124.

Tip: Classic Rectangular keyboard platforms require 28"W of kneespace clearance below worksurface.

Tip: When using MS Natural Keyboard, specify platform without palm rest.







	Standard Includes	Required to Spe
ils,	 Keyboard platform: 7027 Charcoal paint Ambidextrous, integrated mouse surface 	Style number

· Foam palm rest, if selected

Standard Includes

Specification Information									
• Dimensions			 Weight 	• Style	• U.S.				
D	W	н	-	Number	Price				
				•	•				

Without Palm Rest

101/4"	271/2"	2 ¹ /2"	8.5 lb	CR1000	\$110

With Positionable Palm Rest

101/4" 271/2" 21/2" 10.5 lb CR10PP \$199

With Full-Width, Fixed-Height Palm Rest

CR10FF 101/4" 271/2" 21/2" 9.5 lb \$190

101/4" 271/2" 21/2" 10.5 lb CR10FA \$217

With Full-Width, Adjustable Palm Rest


26" Keyboard Platforms

Tip: 26" keyboard platform is for use in straight application only.

See page 124.

Tip: 26" keyboard platforms require 26" of kneespace clearance below worksurface.

Tip: When using MS Natural Keyboard, specify platform without palm rest.



			Standard I	ncludes		Required to Specify		
Need Produc page 1	ct detai	ls, •	Ambidextrous, i	rm: 7027 Charco ntegrated mouse rest, if selected		1 Style number 2 Palm rest type (see below under Required Selections)		
			Required S	elections	U.S. Price	Required to Specify		
Palm Rest			Non-antimicrobi Antimicrobial		No cost No cost	Specify with non-antimicrobial. Specify with antimicrobial.		
Spe	cifica	ation II	nformation					
• Dime D	ensior W	ns H	·Weight	• Style Number	•U.S. Price			
With	out I	Palm R	est					
9 ³ /4"	26"	1/4"	4 lb	261000	\$131 :			
With	19 "	Green-	Gel Palm R	est				
9 ³ /4"	26"	1/4"	4.9 lb	2610GG	\$153			
With	26"	Green-	Gel Palm R	est				
9 ³ /4"	26"	1/4"	5 lb	261026GG	\$159			



Details Specification Guide

April 2015

19" Keyboard Platforms

▶ Need help?

page 134

Palm Rest


Product details,

Tip: 19" keyboard platforms are for use in straight, 17" diagonal, and 18" radius applications. ► See page 124.

Tip: Extended mechanism required for 12" radius corner applications.


Tip: 19" keyboard platforms require 28"W of kneespace clearance.

Tip: When using MS Natural Keyboard, specify platform without palm rest.









raini nest		•	Antimicrobial		No cost	Specify with antimicrobial.	
Spe	cifica	ation I	nformation				
	ension W		·Weight	• Style Number	•U.S. Price		
With	nout F	Palm R	lest				
Left-	Hande	d					
93/4"	19"	1/4"	3.5 lb	19ML00	\$120		
Right	t-Hand	ed					
9 ³ /4" :	19"	1/4"	3.5 lb	19MR00	\$120 :		
With	ı Gree	en-Gel	Palm Rest				
Left-	Hande	d					
9 ³ /4"	19"	1/4"	4.4 lb	19MLGG	\$142		
Right	t-Hand	ed					
9 ^{3/} 4" :	19"	1/4"	4.4 lb	19MRGG	\$142 :		
19"	Dual-	Mouse	e Platform w	ithout Pal	m Rest		
9 ³ /4" :	19"	1/4"	4 lb	19MD00	\$165 :		
19 "	Dual-	Mouse	e Platform w	ith Green-	Gel Palm Rest	t i i i i i i i i i i i i i i i i i i i	
9 ³ /4"	19"	1/4"	4.9 lb	19MDGG	\$187		

Standard Includes

· Keyboard platform: 7027 Charcoal

· Green-Gel palm rest, if selected

Required Selections

Non-antimicrobial

• 9" diameter same-plane swivel mouse surface

· Mouse pad with mouse retention fence/wire management

U.S. Price

No cost



Required to Specify

2 Palm rest type (see below under

Required to Specify

Specify with non-antimicrobial.

Required Selections)

1 Style number

19" Keyboard Platforms with Articulating Mouse

Tip: 19" keyboard platforms are for use in straight, 17" diagonal, and 12" radius applications. ▶See page 124.

▶ Need help? Product details, page 134

Palm Rest

• Dimensions

W

D

· Keyboard platform: 7027 Charcoal

Required Selections

Style

Number

19AM00

Non-antimicrobial

Weight

· Antimicrobial

Standard Includes

- · 9" diameter height-adjustable swivel mouse surface

U.S. Price

·U.S.

\$203

Price

No cost

No cost

- · Mouse pad with mouse retention fence/wire management
- · Green-Gel palm rest, if selected

Required to Specify

1 Style number

2 Palm rest type (see below under

Required to Specify

Specify with non-antimicrobial.

Specify with antimicrobial.

Required Selections)

Tip: Extended mechanism required for 12" radius corner applications.

Tip: 19" platform with articulating mouse, requires 211/2"W of kneespace clearance below worksurface.

Tip: Mouse surface allows six different height positions and can be positioned over 10 key or used on the same horizontal plane as the platform.

Tip: When using MS Natural Keyboard, specify platform without palm rest.



$\sim O$	With	out I	Palm F	lest
	9 ³ /4"	19"	1/4"	4
	:			
		0		D-1

19" 1/4" 4 lb

With Green-Gel Palm Rest

Specification Information

н

1/4" 93/4" 19" 4.9 lb 19AMGG \$224




Enviro Keyboard Platforms

Tip: Enviro keyboard platforms are for use in straight, 17" diagonal, and 18" radius applications. See page 124.

Tip: Enviro keyboard plat-form requires 28"W of kneespace clearance below , worksurface.

Tip: When using MS Natural Keyboard, specify platform without palm rest.





			Standard I	ncludes		Required to Specify		
Need help? Product details, page 135		,	 Keyboard platform: 7027 Charcoal Reversible platform for left- or right-hand use Mouse pad with mouse retention fence/wire managemer Green-Gel palm rest, if selected 			1 Style number 2 Palm rest type (see below under Required Selections)		
			Required S	elections	U.S. Price	Required to Specify		
Palm	Rest		Non-antimicrobiAntimicrobial	ial	No cost No cost	Specify with non-antimicrobial. Specify with antimicrobial.		
Spe	cifica	tion	Information					
• Dime D	ensions W	; H	·Weight	• Style Number	•U.S. Price			
With	out Pa	alm I	Rest					
14 ¹ /2"	28"	3/4"	3.5 lb	EN1000	\$120			
With	Gree	n-Ge	I Palm Rest					
14 ¹ /2"	28"	3/4"	4.4 lb	EN10GG	\$142			
:			:					



FrameOne/c:scape Keyboard Platforms

Tip: FrameOne/c:scape key- Need help? board platform is for use with FrameOne, c:scape, and shallow depth worksurface applications only. ▶See page 124.


Tip: FrameOne/c:scape keyboard platform is for use with Stella Standard mechanisms only.

Tip: FrameOne/c:scape keyboard platform requires 28"W of kneespace clearance below worksurface.

Tip: FrameOne/c:scape keyboard platform will stow under 30"D FrameOne and c:scape worksurfaces when used with a 17"L track and Stella Standard mechanism.

Tip: FrameOne/c:scape platform will not stow under 24"D FrameOne or c:scape worksurface.

Tip: When using MS Natural Keyboard, specify platform without palm rest.





Product details, page 135

Standard Includes

- Keyboard platform: 7027 Charcoal
- 9" diameter swiveling mouse surface
- · Mouse pad with mouse retention fence/wire management
- · Green-Gel palm rest, if selected

Required to Specify

1 Style number

- 2 Palm rest type (see below under
- Required Selections)

Required Selections U.S. Price Required to Specify Non-antimicrobial Specify with non-antimicrobial. **Palm Rest** No cost · Antimicrobial No cost Specify with antimicrobial.

Specification Informatio

Dimensions ·Weig		·Weight	• Style	•U.S.	
D	W	н		Number	Price
:				:	•

Without Palm Rest

9" 1/4" 3.5 lb **FOCSML00** \$120 19"

Right-Handed

19" 1/4" 9' 3.5 lb **FOCSMR00** \$120

With Green-Gel Palm Rest

Left-Handed

9' 19" 1/4" FOCSMLGG 44 lb \$142

Right-Handed

9" 1/4" 19" 4.4 lb FOCSMRGG \$142



See page 1 for details.

Details Specification Guide

Palm Rests

Adjustable Foam Palm Rests

For Use with Slider Keyboard Platforms

			Standard I	ncludes		Required to Specify
	help? Ict detail 122		Foam palm rest	: 7027 Charcoal	paint	Style number
Spe	ecifica	ation Ir	formation			
Dim D	ension W	s H	·Weight	• Style Number	•U.S. Price	
Star	ndard	Adjust	able Foam			
1 ¹ /2" :	18"	2"	1 lb	SA	\$40 :	
	per A	djustal	ole Foam			
Dee	P	-				

Cushioned Replacement Pads

For Use with Slider Keyboard Platforms

Standard Includes	Required to Specify
Pad: 7027 Charcoal paint	Style number

Tip: Replacement pad snaps down into existing palm rest.

]





d to Sno

Slider Platform Mousing Surface Palm Rest

Tip: Slider platform mousing surface palm rest is for use with Slider keyboard platforms only.

Tip: Palm rest must be removed to slide mouse surface.

			Standard I		Required to Specify		
page [·]	ict details 122	6,	Foam palm rest	: 7027 Charcoal	paint	Style number	
-	ension: W		Weight	• Style Number	•U.S. Price		

dard Includ

19" Green-Gel Palm Rest

For Use with 19", 26", Enviro, or FrameOne/c:scape Keyboard Platforms



Tip: 19" palm rest is for use with 19", 26," Enviro, and FrameOne/c:scape platforms.

Standard Includes		Required to Specify		
Palm rest: 0835 Black		1 Style number 2 Palm rest type (see below under Required Selections)		
Required Selections	U.S. Price	Required to Specify		
Non-antimicrobialAntimicrobial	No cost No cost	Specify with non-antimicrobial. Specify with antimicrobial.		
on Information				
•Weight •Style I Number	·U.S. Price			
	 Palm rest: 0835 Black Required Selections Non-antimicrobial Antimicrobial On Information Weight •Style 	 Palm rest: 0835 Black Required Selections U.S. Price Non-antimicrobial No cost Antimicrobial No cost On Information Weight :Style :U.S. 		

³/4" 19" 2¹/2" 0.9 lb **GG** \$23



26" Green-Gel Palm Rest

For Use with 26" Keyboard Platforms

Tip: 26" palm rest is for use with 26" keyboard platform only.

		Standard I	ncludes		Required to Specify
Need help? Product details, page 133		Palm rest: 0835	Black		1 Style number 2 Palm rest type (see below under Required Selections)
		Required S	elections	U.S. Price	Required to Specify
Palm Rest		Non-antimicrobialAntimicrobial		No cost No cost	Specify with non-antimicrobial. Specify with antimicrobial.
Speci	fication	Information			
Dimen D V	sions V H	·Weight	• Style Number	•U.S. Price	
3/4" 2	26" 21/2"	' 1 lb	26GG	\$28	

Full-Width, Fixed-Height Palm Rest

For Use with Classic Rectangular Platforms



	Standard Includes	Required to Specify
Need help? Product details, page 133	• Palm rest: 7027 Charcoal paint	Style number

Specification Information								
Dimensions D W H		·Weight		·U.S. Price				
			:	:	:			
2 ¹ /2"	271/2"	21/2"	1 lb	FF	\$82			

Full-Width, Height-Adjustable Palm Rest

For Use with Classic Rectangular Platforms



 Standard Includes
 Required to Specify

 Need help?
 • Palm rest: 7027 Charcoal paint
 Style number

 Product details, page 133
 • Palm rest: 7027 Charcoal paint
 Style number



Dimensions Weight Style U.S. D W H Number Price 2 ¹ /2" 27 ¹ /2" 2 ¹ /2" 2 lb FA \$114	Specification Information							
				·Weight	Number			
	2 ¹ /2"	271/2"	21/2"	2 lb		\$114		

Positionable Palm Rest

For Use with Classic Rectangular Platforms



Tip: Palm rest can be positioned on the left- or righthand side.

			Standard I	Required to Specify		
Need help? Product details, page 133			Palm rest: 7027 Charcoal paint			Style number
Sp	ecifica	tion In	formation			
• Din D	nensions W	H	• Weight	• Style Number	•U.S. Price	
2" :	19 ¹ /2"	21/2"	2 lb	PP	\$92 :	

Standard Foam Palm Rest

For Use with Jules Platforms



	Standard I	ncludes		Required to Specify	
 Need help? Product details, pages 131 	Palm rest: 6288	3 Charcoal plastic	2	Style number	
Specification	n Information				
Dimensions D W H	·Weight	• Style Number	·U.S. Price		

\$28

Extended Foam Palm Rest

For Use with Diagonal and Radius Platforms

3/4"

18¹/2" 2¹/2"



 Standard Includes
 Required to Specify

 Need help?
 • Palm rest: 6288 Charcoal plastic
 Style number

 Product details, page 132
 • Palm rest: 6288 Charcoal plastic
 Style number

pecification Information

0.08 lb

SF

Dime	ensior	IS	 Weight 	• Style	•U.S.
D	w	н		Number	Price
3/4"	26"	21/2"	0.1 lb	EF	\$33

For Canadian Pricing Multiply U.S. Price by the Canadian price factor. See page 1 for details.

Details Specification Guide

Keyboard Assemblies

Stella Standard Keyboard Assemblies

▶ Need help?

pages 122

Product details,

Tip: Jules platform can be used in 12" radius corners when used with an extended mechanism.

Tip: Be sure to consider the mechanism track length in relationship to the worksurface depth.

Tip: For platform features, see page 124.

Stand	ard	Incl	udes

- · Mechanism and 20"L track: 0835 Black · Keyboard platform:
- Slider and Classic Rectangular: 7027 Charcoal paint
- Jules, Diagonal, and Radius: 6288 Charcoal plastic - 19", 26", Enviro, and FrameOne/c:scape:
- 7027 Charcoal paint
- Mouse surface:
 - Slider and Jules: ambidextrous, sliding mouse surface - Diagonal, Radius, Classic Rectangular, and 26": ambidextrous, integrated mouse surface
 - 19", Enviro, and FrameOne/c:scape: 9" diameter

\$476

\$536

\$384

\$412

- same-plane, swivel mouse surface
- · Palm rest, if selected
- **Required Selections U.S. Price Required to Specify** Non-antimicrobial **Palm Rest** No cost Specify with non-antimicrobial. Antimicrobial Specify with antimicrobial. No cost

Required to Specify

2 Palm rest type, if green-gel palm rest is

selected (see below under Required

1 Style number

Selections)

Spe	cifica	ation	Information	
Dime D	ensior W	ns H	• Style Number	·U.S. Price
	er Pla			





SS20SL1000

91/2" 20" 3" SS20SL10SA \$516



Jules Pla

20"

Without Palm Rest

3"

20"

91/2"

9¹/2"

12"



	·	۰.	 •••		-

183⁄4"



For Canadian Pricing Multiply U.S. Price by the Canadian price factor. See page 1 for details.

atforms		
	•	

SS20JP1000

SS20JP10SF

Specification Information, continued on next page

SS20SL10DA

Without Palm Rest

With Deep Palm Rest

3"

55⁄8"

With Standard Foam Palm Rest

183/4" 55/8"



21" 1	with Ext	tended	d Foam Palm Rest		
12"	27 ¹ /2"	3"	SS202110EF	\$458	
:			:	:	

·U.S.

Price

\$458



Radius	Platform

Without Palm Rest

18"	with Ext	ended	Foam Palm Rest	
14"	27 ¹ /2"	3"	SS201810EF	\$4

Classic Rectangular Platforms

14" 27½" 3" **\$\$201810EF** \$458

Specification Information, continued from previous page

SS201710EF

Style

Number

Specification Information

17" with Extended Foam Palm Rest

н

Diagonal Platforms

271/2" 3"

Dimensions

w

D

12"

101⁄4"	271/2"	55⁄8"	SS20CR1000	\$407
With	Positio	nable F	Palm Rest	
10 ¹ ⁄4"	271⁄2"	55⁄8"	SS20CR10PP	\$496
With	Full-Wi	dth, Fix	ed-Height Palm Re	est



With	Full-Wi	dth, He	eight-Adjustable Pa	alm Rest	
10 ¹ /4"	271/2"	55⁄8"	SS20CR10FA	\$514	



Dual Mouse

19"

3"

9³/4"

Tip: For platform features, see page 124.





SS2019MD00

Spe	ecific	ation	Information	
·Dim	nensio	ns	• Style	·U.S.
D	W	н	Number	Price
:			•	


19" Platforms without Palm Rest

Left-	Hande	d			
9 ³ /4"	19"	3"	SS2019ML00	\$417	

\$462



	lided	anded	nand	Right
9 ³ /4" 19" 3" SS2019MR00 \$417	" 3" SS2019MR00	9" 3"	19"	93/4"





With	Articu	lating	Mouse Surface	
9 ³ /4"	19"	3"	SS2019AM00	\$500
:			:	

Left-l	lande	d			
93/4"	19"	3"	SS2019MLGG	\$439	
Right	-Hand	ed			
93/4"	19"	3"	SS2019MRGG	\$439	
Dual	Mouse	9			
9 ³ /4"	19"	3"	SS2019MDGG	\$484	
With	Articu	lating	Mouse Surface		
93/4"	19"	3"	SS2019AMGG	\$521	







For Canadian Pricing Multiply U.S. Price by the Canadian price factor. See page 1 for details.

_

Computer Support Tools

Tip: For platform features, see page 124.





Specification Information, continued from previous page

Speci	fication	Information		
Dimens D V		• Style Number	U.S. Price	
Enviro	Platfor	ms		
Without	Palm Res	st		
14 ¹ /2" 2	8" 3"	SS20EN1000	\$417	
With Gr	een-Gel P	alm Rest		
14 ¹ /2" 2	8" 3"	SS20EN10GG	\$439	
26" Pla	atforms			
	Palm Res			

9³/4" 26" 3" SS20261000 \$428

Jose	

	9 ³ /4"	26"	3"	SS202610GG	\$450	
With 26" Green-Gel Palm Rest						
9 ³ /4" 26" 3" SS20261026GG \$456	9 ³ /4"	26"	3"	SS20261026GG	\$456	

9"

19"

Tip: For platform features, see page 124.

Tip: FrameOne/c:scape platforms are standard with Stella assemblies and cut-out platform and can be used with of furniture and systems with limited space for track adjustment. Check clearance to determine appropriate track length.

Specification Information, continued from previous page

SS11FCMLGG

Di	nensio	ns	Style	• U.S.
D	W	н	Number	Price
			:	:
			:	:
			:	:
-			•	
				•
:				

Left-Hand with Green-Gel Palm Rest and 11"L Track For Use With 24"D Worksurface

\$440


FrameOne/c:scape Platforms

3"

\bigcirc	

Tip: When used with a 24"D worksurface, FrameOne/ c:scape platform with 11"L track will protrude 4" from front edge of worksurface when stored.





9'

Right-Hand with Green-Gel Palm Rest and 17"L Track For Use With 30"D Worksurface

\$440

3" SS17FCMRGG 19"



Required to Specify

2 Palm rest type, if green-gel palm rest is

selected (see below under Required

1 Style number

Selections)

Stella Extended Keyboard Assemblies

Tip: Be sure to consider the mechanism track length in relationship to the worksurface depth.

Tip: For platform features, see page 124.

Need help?	
Product details,	
pages 122	

Keyboard platform:
- Slider and Classic Rectangular: 7027 Charcoal paint
- Jules, Diagonal, and Radius: 6288 Charcoal plastic
 – 19", 26" and Enviro: 7027 Charcoal paint
Mouse surface:
- Slider and Jules: ambidextrous, sliding mouse surface
- Diagonal Radius Classic Rectangular and 26"

Mechanism and 23"L track: 0835 Black

Standard Includes

Keyboard platform:

sic Rectangula ar, and 26": Diagonal, Radius, Cla ambidextrous, integrated mouse surface

- 19" and Enviro: 9" diameter same-plane, swivel mouse surface

· Palm rest, if selected

	Required Selections	U.S. Price	Required to Specify
Palm Rest	 Non-antimicrobial Antimicrobial 	No cost No cost	Specify with non-antimicrobial. Specify with antimicrobial.

Specification Information

_				
·Dim	nensio	ns	Style	·U.S.
D	w	н	Number	Price

Slider Platforms

Without Palm Rest				
91/2"	20"	3"	SE23SL1000	\$493

With Standard Palm Rest

91/2" 20" 3" SE23SL10SA \$533

With Deep Palm Rest

91/2" 20" 3" SE23SL10DA \$553

Jules Platforms

Without Palm Rest

12" 183⁄4" 55⁄8" SE23JP1000 \$401


With Standard Foam Palm Rest


55/8" SE23JP10SF \$429 18³⁄4"

Specification Information, continued on next page

For Canadian Pricing Multiply U.S. Price by the Canadian price factor. See page 1 for details.

12"





Specification Information, continued from previous page

SE232110EF

Spe	ecific	ation I	Information	
Dim D	nensio W	ns H	• Style Number	·U.S. Price

Diagonal Platforms

271/2" 3"

12¹/2"

12 ¹ /2" 27 ¹	/2" 3"	SE231710EF	\$475	

Ľ	

18" v	with Ext	tende	ed Foam Palm Rest				
14"	271/2"	3"	SE231810EF	\$475			

\$475

	\bigcirc

	\checkmark
	*
No. of the second secon	
0	

Witho	ut Palr	n Rest		
10 ¹ /4"	271/2"	55⁄8"	SE23CR1000	\$424

Classic Rectangular Platforms

With F	Positio	nable	Palm Rest		
10 ¹ /4"	271/2"	5 ⁵ ⁄8"	SE23CR10PP	\$513	



10 ¹ /4" 2	27 ¹ /2" 5 ⁵ /8" SE23CR10	F \$504
-----------------------	--------------------------------------------------------	----------------

With	Full-Wi	dth, He	eight-Adjustable Pa	Im Rest	
10 ¹ /4"	271/2"	55⁄8"	SE23CR10FA	\$531	



Specification Information, continued from previous page

Speci	fication	Information		
Dimen	sions	Style	·U.S.	
D V	N H	Number	Price	
:		:	:	

19" Platforms without Palm Rest

Left-l	lande	d			
9 ³ /4"	19"	3"	SE2319ML00	\$434	

\$434

Right-Handed

93/4" 19" 3" SE2319MRUU	9 ³ /4"	19"	3"	SE2319MR00
-------------------------	--------------------	-----	----	------------

Dual Mouse

9³/4"

Left-Handed

-				
9 ³ /4"	19"	3"	SE2319MD00	\$479

With Articulating Mouse Surface

SE2319AM00 19" 3" \$517

19" Platforms with Green-Gel Palm Rest

	93/4"	19"	3"	SE2319MLGG
y	Right	t-Hand	ed	
\mathcal{D}	9 ³ /4"	19"	3"	SE2319MRGG
	Dual	Mouse	•	
Ç	93/4"	19"	3"	SE2319MDGG
	With	Articu	lating	Mouse Surface
	03/4"	10"	2"	SE2310AMCC

Right	t-Hand	ed			
9 ³ /4"	19"	3"	SE2319MRGG	\$456	
Dual	Mouse	•			


\$456

rface


9 ³ /4"	19"	3"	SE2319AMGG	\$538
•			•	•

Specification Information, continued on next page

For Canadian Pricing Multiply U.S. Price by the Canadian price factor. See page 1 for details.



Specification Information							
Dime D	ension W	IS H	• Style Number	· U.S. Price			
Envi	ro Pla	atforn	15	·			
Witho	ut Pa	lm Res	t				
14 ¹ /2"	28"	3"	SE23EN1000	\$434			
With	Green	-Gel Pa	Im Rest				
14 ¹ /2"	28"	3"	SE23EN10GG	\$456			
			•	:			
26" F	Platf	orms					



With	19" Gi	reen-Ge	el Palm Rest		
9 ³ /4"	26"	3"	SE232610GG	\$467	

\$445

With 26" Green-Gel Palm Rest

55⁄8"

9³/4"

26"

9³/4" 26" 3" SE23261026GG \$473

SE23261000



5" Lift and Lock Keyboard Assemblies

Tip: Be sure to consider the mechanism track length in relationship to the worksurface depth.

Tip: For platform features, see page 124.

Need help?	
Product details,	
pages 122	

 Need help? Product details, pages 122 	 Mechanism and 23"L track: 083 Keyboard platform: Slider and Classic Rectangul. Jules, Diagonal, and Radius: 19", 26", and Enviro: 7027 Ch Mouse surface: Slider and Jules: ambidextrou Diagonal, Radius, Classic Re ambidextrous, integrated moi 19" and Enviro: 9" diameter s surface Palm rest, if selected Required Selections	ar: 7027 Charcoal paint 6288 Charcoal plastic arcoal paint us, sliding mouse surface ictangular, and 26": use surface iame-plane, swivel mouse	 Style number Palm rest type, if green-gel palr selected (see below under Required Selections)
Palm Rest	Non-antimicrobial Antimicrobial	No cost No cost	Specify with non-antimicrobial.

Specification Information

L523SL1000

L523SL10SA

\$339

\$379

\$247

Standard Includes

Slider Platforms Without Palm Rest

3"

With Standard Palm Rest

3"

20"

91/2"

9¹/2"

12"

12"


Jules Platforms

Without Palm Rest

183/4" 55/8"

183⁄4" 55⁄8"

With Standard Foam Palm Rest



For Canadian Pricing Multiply U.S. Price by the Canadian price factor. See page 1 for details.

20"

With Deep Palm Rest 20" 3" L523SL10DA \$399 91/2"

L523JP10SF \$275

Specification Information, continued on next page


L523JP1000

	R	eq	Juii	red	l to	S	pec	>ify	1

1 Style number

een-gel palm rest is under Required

Keyboard Assemblies, continued	161



Specification Information, continued from previous page

Dime D	ensions W	, H	• Style Number	· U.S. Price	
Diag	onal I	Platfo	Drms		
17" w	ith Ext	ended	d Foam Palm Rest		
12 ¹ /2"	271/2"	3"	L5231710EF	\$321	
	ith Ext	ended	d Foam Palm Rest		
21" w					



Radius Platform

141/2" 271/2" 3"

18" with Extended Foam Palm Rest

L5231810EF

	out Palm F	tangular Platforms		
	27 ¹ /2" 5 ⁵		\$270	
	Positiona	ble Palm Rest	\$359	
10 74	2112 0	Lozgoniorr	φοσσ	
With	Full-Width	n, Fixed-Height Palm R	est	
	Full-Width 27 ¹ /2" 5 ⁵		est \$350	
101/4"	271/2" 55		\$350	

\$321




Left-	Hande	d			
9 ³ /4"	19"	3"	L52319ML00	\$280	
Right	t-Hand	ed			
93/4"	19"	3"	L52319MR00	\$280	
Dual	Mouse	•			
93/4"	19"	3"	L52319MD00	\$325	

• U.S.

Price

/ith Artic	ulating	Mouse Surface	
³ /4" 19"	3"	L52319AM00	\$363
		:	:

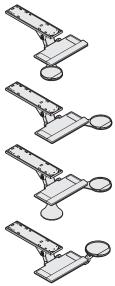

19" Platforms with Green-Gel Palm R

Specification Information, continued from previous page

Style

Number

Specification Information

н

Dimensions

D


W

Left-	Hande	d		
93/4"	19"	3"	L52319MLGG	\$302
Right	-Hand	ed		
9 ³ /4"	19"	3"	L52319MRGG	\$302
Dual	Mouse	•		
93/4"	19"	3"	L52319MDGG	\$347

With A	h Articulating Mouse Surface		Nouse Surface		
9 ³ /4"	19"	3"	L52319AMGG	\$384	

Specification Information, continued on next page

For Canadian Pricing
Multiply U.S. Price by the
Canadian price factor.
See page 1 for details.



Specification Inform	ation, continued f	rom previous page
----------------------	--------------------	-------------------

	ension		• Style	· U.S.	
D	W	н	Number	Price	
Envi	ro Pla	atform	IS		
Witho	out Pal	Im Rest	t		
14 ¹ /2"	28"	3"	L523EN1000	\$280	
With	Green	-Gel Pa	lm Rest		
		- Gel Pa 3"	Im Rest L523EN10GG	\$302	
With 14 ¹ /2"				\$302 :	
				\$302 :	
				\$302 :	
14 ¹ /2"		3"		\$302 :	
14 ¹ /2"	28" Platfo	3"	L523EN10GG	\$302 :	
14 ¹ /2"	28" Platfo	3" Drms	L523EN10GG	\$302 : \$291	
14 ¹ /2" : 26" Witho	28" Platfc	3" DrMS	L523EN10GG		
14 ¹ /2" : 26" Witho	28" Platfc	3" DrMS	L523EN10GG		
14 ¹ /2" : 26" Withc 93⁄4"	28" Platfc out Pal 26"	3" DTMS Im Rest 3"	L523EN10GG		
14 ¹ /2" : 26" Withc 93⁄4"	28" Platfc out Pal 26"	3" DTMS Im Rest 3"	L523EN10GG		

L523261026GG 93⁄4" 26" 3" \$319



Required to Specify

2 Palm rest type, if green-gel palm rest is

selected (see below under Required

1 Style number

Selections)

7" Lift and Lock Keyboard Assemblies

Tip: Be sure to consider the mechanism track length in relationship to the worksurface depth.

Tip: For platform features, see page 124.

Need help?	
Product details,	
pages 122	

P

Product details,
pages 122

- 19", 26" and Enviro: 7027 Charcoal paint · Mouse surface: - Slider and Jules: ambidextrous, sliding mouse surface - Diagonal, Radius, Classic Rectangular, and 26":

- Slider and Classic Rectangular: 7027 Charcoal paint

- Jules, Diagonal, and Radius: 6288 Charcoal plastic

ambidextrous, integrated mouse surface

Mechanism and 26"L track: 0835 Black

- 19" and Enviro: 9" diameter same-plane, swivel mouse surface

· Palm rest, if selected

Standard Includes

· Keyboard platform:

	Required Selections	U.S. Price	Required to Specify
Palm Rest	Non-antimicrobialAntimicrobial	No cost No cost	Specify with non-antimicrobial. Specify with antimicrobial.

Specification Information

·Dim	ension	ıs	• Style
D	W	н	Number

·U.S. Price r

Slider Platforms

With	out Pa	Im Res	st	
91⁄2"	20"	3"	L726SL1000	\$339

With Standard Palm Rest

91/2" L726SL10SA \$379 20" 3"

With Deep Palm Rest

91/2" 20" 3" L726SL10DA \$399

Jules Platforms


Without Palm Rest

12" 183⁄4" 55⁄8" L726JP1000 \$247

With Standard Foam Palm Rest

12" 55/8" L726JP10SF \$275 183/4"


Specification Information, continued on next page





For Canadian Pricing Multiply U.S. Price by the Canadian price factor. See page 1 for details.

Details Specification Guide



21" with Extende	d Foam Palm Rest	
121/2" 271/2" 3"	L7262110EF	\$321
•	-	•

• U.S.

\$321

Price



Radi	Radius Platform								
18" w	18" with Extended Foam Palm Rest								
14 ¹ /2"	271/2"	3"	L7261810EF	\$321					
:				:					



\mathbf{T}
For Canadian Pricing
Multiply U.S. Price by the
Canadian price factor.
See page 1 for details.

Classic Rectangular Platforms

Without Palm Rest							
10 ¹ /4"	27 ¹ /2"	55⁄8"	L726CR1000	\$270			
With I	Positio	nable F	Palm Rest				
10 ¹ /4"	271/2"	55⁄8"	L726CR10PP	\$359			
With	Full-Wi	dth, Fix	ed-Height Palm R	st			
10 ¹ /4"	27 ¹ /2"	55/8"	L726CR10FF	\$350			

With I	With Full-Width, Height-Adjustable Palm Rest							
10 ¹ /4"	27 ¹ /2"	55⁄8"	L726CR10FA	\$377				

Specification Information, continued from previous page

L7261710EF

Style

Number

Specification Information

17" with Extended Foam Palm Rest

н

Diagonal Platforms

Dimensions

W

121/2" 271/2" 3"

D

)
I

Specification Information, continued from previous page

Sp	ecific	ation	Information							
·Dim	nensio	ns	• Style	۰U.S.						
D	w	н	Number	Price						

19" Platforms without Palm Rest

Left-	Hande	d		
9 ³ /4"	19"	3"	L72619ML00	\$280
Right	-Hand	ed		
9 ³ /4"	19"	3"	L72619MR00	\$280
Dual	Mouse	•		
		3"	L72619MD00	\$325

With Articulating Mouse Surface

93/4" 19" 3" **L72619AM00** \$363

19" Platforms	with	Green-Gel	Palm Re	st
----------------------	------	------------------	----------------	----

Left-H	lande	d			
93/4"	19"	3"	L72619MLGG	\$302	

Right-Handed								
9 ³ /4"	19"	3"	L72619MRGG	\$302				
Dual	Mouse	•						
		3"	L72619MDGG	\$347				

With Articulating	Mouse	Surface
-------------------	-------	---------


9³/4"

19" 3" **L72619AMGG** \$384

Specification Information, continued on next page

For Canadian PricingMultiply U.S. Price by the Canadian price factor.
▶ See page 1 for details.






Specification Information,	continued from	previous page
----------------------------	----------------	---------------

Dimen D \	sions V H	• Style Number	·U.S. Price	
		•	· · · · · · · · · · · · · · · · · · ·	
Enviro	Platfor	ns		
	Platfori Palm Res			

With Green-Gel Palm Rest

14¹/2" 28" 3" **L726EN10GG** \$302

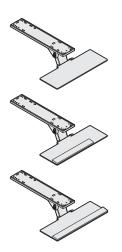

Witho	out Pa	lm Rest			
93/4"	26"	55⁄8"	L726261000	\$291	
With	19" Gi	reen-Ge	I Palm Rest		
With 9 ³ /4"	19" Gi 26"	reen-Ge 3"	I Palm Rest L7262610GG	\$313	

With 26" Green-Gel Palm Rest

9³/4" 26" 3" **L726261026GG** \$319



Dial Indicator6 Keyboard Assemblies

Tip: Be sure to consider the mechanism track length in relationship to the worksurface depth.

Tip: For platform features, see page 124.

Need help?
Product details,
pages 122

- **Standard Includes** · Mechanism and 23"L track: 0835 Black
- · Keyboard platform: - Slider and Classic Rectangular: 7027 Charcoal paint
- Jules, Diagonal, and Radius: 6288 Charcoal plastic
- 19", 26", and Enviro: 7027 Charcoal paint
- · Mouse surface:
- Slider and Jules: ambidextrous, sliding mouse surface - Diagonal, Radius, Classic Rectangular, and 26":
- ambidextrous, integrated mouse surface
- 19" and Enviro: 9" diameter same-plane, swivel mouse surface
- · Palm rest, if selected

	Required Selections	U.S. Price	Required to Specify
Palm Rest	 Non-antimicrobial Antimicrobial 	No cost No cost	Specify with non-antimicrobial. Specify with antimicrobial.

Specification Information

·Dim	ensio	ıs	Style	·U.S.	
D	W	н	Number	Price	

Slider Platforms

9 ¹ /2" 20" 3" D623SL1000 \$412	Witho	Without Palm Rest						
	91/2"	20"	3"	D623SL1000	\$412			

With Standard Palm Rest

91/2" 20" 3" D623SL10SA \$452

With Deep Palm Rest

9¹/2" 20" 3" D623SL10DA \$472

Jules Platforms


Without Palm Rest

12" 183/4" 55/8" D623JP1000 \$320

With Standard Foam Palm Rest

12" 183/4" 55/8" D623JP10SF \$348

Specification Information, continued on next page



For Canadian Pricing Multiply U.S. Price by the Canadian price factor. See page 1 for details.

Required to Specify

1 Style number

2 Palm rest type, if green-gel palm rest is selected (see below under Required Selections)

Specification Information, continued from previous page

D6231710EF

Spe	cific	ation	Information			
• Dim	ensio W	ns H	• Style Number	·U.S. Price		
		п	Number	FILE		

\$394

Diagonal Platforms

12¹/2" 27¹/2" 3"

Radius Platform

17" with Extended Foam Palm Rest

Tip: For platform features,

see page 124.

21" with Extended Foam Palm Rest				
12 ¹ /2"	271/2"	3"	D6232110EF	\$394
			:	:

A.	

	14"	271/2"	3"	D6231810EF	\$394
				:	:

18" with Extended Foam Palm Rest

With Full-Width, Height-Adjustable Palm Rest

Specification Information, continued on next page

D623CR10FA

101/4" 271/2" 55/8"

Witho	out Palı	m Rest			
10 ¹ /4"	271/2"	55⁄8"	D623CR1000	\$343	
With	Positio	nable P	Palm Rest		
10 ¹ /4"	27 ¹ /2"	55⁄8"	D623CR10PP	\$432	
With	Full-Wi	dth. Fix	ed-Height Palm Re	st	



For Canadian Pricing
Multiply U.S. Price by the
Canadian price factor.
See page 1 for details.

\$450

Specification Information, continued from previous page

Spe	ecific	ation	Information				
Dim	nensio	ns	Style	·U.S.			
; D	W	н	Number	Price			

19" Platforms without Palm Rest


Left-	Hande	d		
9 ³ /4"	19"	3"	D62319ML00	\$353
		ad		
Right	-nano	eu		
	19"	3"	D62319MR00	\$353
			D62319MR00	\$353
Right 9 ³ /4"		3"	D62319MR00	\$353

9³/4" 19" 3" **D62319MD00** \$398

With Articulating Mouse Surface

9³/4" 19" 3" **D62319AM00** \$436

mputer pport Tools

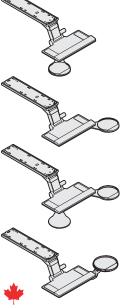

Left-	Hande	d			
93/4"	19"	3"	D62319MLGG	\$375	
Right	-Hand	ed			
9 ³ /4"	19"	3"	D62319MRGG	\$375	
Dual	Mouse	•			


buai mouse

9 ³ /4" 19" 3" D62319MDGG	\$420
---------------------------------------------	-------

With	Articu	lating l	Mouse Surface		
9 ³ /4"	19"	3"	D62319AMGG	\$457	

Specification Information, continued on next page

For Canadian Pricing Multiply U.S. Price by the Canadian price factor. ► See page 1 for details.



Specification I	Information,	continued from	previous page

D623EN1000

Spo	ecific	ation	Information	
Dim D	nensio W	ns H	• Style Number	·U.S. Price
	ine D	olform	:	:


Enviro Platforms Without Palm Rest

3"

141/2" 28"

With Gree	n-Gel Pa	alm Rest	
14 ¹ /2" 28"	3"	D623EN10GG	\$375
•			

\$353

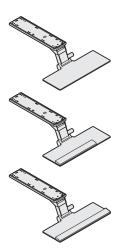

Withe	out Pa	lm Res	t		
93/4"	26"	3"	D623261000	\$364	
With	19" Gı	reen-Ge	el Palm Rest		
With)3/4"	19" Gı 26"	reen-Ge 3"	el Palm Rest D6232610GG	\$386	
				\$386	
				\$386	

D623261026GG 93/4" 26" 3" \$392



Keyboard Assemblies

Technology Worktools and Cable Management

Corner Filler	 Product Details Corner filler is for use in 90° applications to create a diagonal corner for mounting keyboard mechanism. 18" corner filler creates a 17" diagonal corner. 22" corner filler creates a 21" diagonal corner. Corner filler is pre-drilled to allow field installation of keyboard support. 	Surface Materials Corner filler • 7027 Charcoal	Actual DimensionsDepth13"Width24" or 28"Weight10 lb	
Freestanding In-Line Document Support	Product DetailsFreestanding in-line document support can be adjusted to obtain best angle, depth, and horizontal setting to allow user reduced eye movement between screen and data.Easel has a height adjust- ment of 8".	Freestanding in-line document support holds a maximum of 7 lb.	Surface Materials Freestanding in-line document support • 6000 Black	Actual DimensionsDepth18"Width14"Height12"Weight8 lb
Monitor Blocks	Product Details Monitor blocks are 11/2"H and stackable for optimal laptop or monitor height. Stacking of monitor blocks allows for document storage between tiers. Monitor blocks have a cable management feature in the back of the unit.	Monitor blocks ship in package quantity of three.	Surface Materials Monitor blocks • 6152 Champagne • 6153 Pewter • 6288 Charcoal	Actual DimensionsDepth12"Width12"Height11/2"Weight5 lb
Adjustable Foot Rest	Product Details Foot rest features a curved, non-skid surface to provide optimal seat posture and blood circulation. Foot rest can be set in four height positions from 2" to 6" off floor.	Surface Materials Foot rest • 6000 Black	Actual DimensionsDepth12"Width18"Height2"-6"Weight8 lb	

Mobile Collapsible Laptop Support	Product Details	Mobile collapsible laptop support is stan-	Surface Materials	Actual D	imensions
Eaptop Support	Mobile collapsible lap-	dard with a slot for cable	Mobile collapsible	Depth 91/	2"
\frown	top support is standard with 360° swivel base to	management.	 laptop support Brushed aluminum 	Width 12	1/4"
E and	allow information sharing and adjusts six viewing	Mobile collapsible lap- top supports are not		Height 1/2'	!
Specifying, page 179	angles from 20° to 45° without need for tools.	applicable for use with lap- tops that do not open past 90°.		Weight 1.2	5 lb
	Height of laptop sup- port adjusts up to 7"H and collapses to 1/2" for easy storage.	Mobile collapsible lap- top support is constructed of recyclable aluminum to allow for heat dissipation.			
CPU Cradle for Mini Processors	Product Details	Surface Materials	Actual Dimensions	Applicati	ion Topics
Processors	CPU cradle mounts verti-	CPU cradle and track	CPU cradle	CPU cradle	holds CPUs
\frown	cally below worksurface and swivels 360°.	• 0835 Black	Depth 7"	with the follow ranges:	ing dimension
TV		Height-adjustable	Width 12"	Depth 17	1/2"
\Diamond	Protective pad is stan- dard with CPU cradle.	 column Brushed Aluminum 	Height 4"	· ·	2" - 5"
Specifying, page 180	80 CPU cradle supports a maximum weight of 15 lb. CPU cradle may be used		Weight 4 lb		5" - 15 ⁷ /10"
			Track	Weight 15	lb
			Depth 9 ⁷ /8"	iteligine ite	
	with FrameOne and c:scape		Width 5 ³ /4"		
	applications.		Weight 1 lb		
	CPU cradle slides on track to allow for access to cables.				
Vertical CPU Cradles	Product Details	Vertical CPU cradle can be fixed- or wall-mounted.	Surface Materials	Actual D	imensions
	Vertical CPU cradles		Vertical CPU cradle	Depth	15"–22"
	are available locking or non-locking.	slides on track to allow for	• 0835 Black	Width	31/2"-9"
	Vertical locking CPU			Height	121/2"-221/2"
	cradle is standard with soft touch knob with key locking system. All locks are keyed			Track Depth with Endcap	17 ³ /10"
Specifying, page 180	alike. Vertical CPU cradle mounts vertically below worksurface and swivels 360°.	access to cables.		Weight Non-Locking Locking	12.65 lb 14 lb
	Vertical CPU cradle requires 18"D clearance below worksurface.				

-Non-Locking 12.65 lb -Locking 14 lb

Details Specification Guide

Technology Worktools and Cable Management, continued 175

Vertical Processor Freestanding Sling	Product Details	Adjustable straps sup- port CPUs with perimeters	Surface Materials	Actual D	Dimension
Freestanding Sling	Vertical processor	up to 53".	Vertical processor	Depth	18"
	sling stores CPUs vertically below worksurface.	Vertical processor	sling 0835 Black 	Width	5 ¹ /2"
	Vertical processor	sling requires 18"D clear- ance below worksurface.		Height	21/2"
J-U	sling is standard with slides to allow access to disk	Vertical processor		Track Depth with Endcap	17 ³ /10"
Specifying, page 181	drives and cables.	sling supports a maximum weight of 75 lb.		Weight	4 lb
Vertical Processor Fixed Sling For Use	Product Details	Vertical processor sling requires 12"D clear-	Surface Materials	Actual D	oimension
with c:scape and	Vertical processor	ance below worksurface.	Vertical processor	Depth	10 ³ /4"
FrameOne	sling stores CPUs vertically and is mounted in a fixed	Vertical processor	sling0835 Black	Width	3 ³ /4"
	position below worksurface.	sling supports a maximum weight of 50 lb.		Height	6"
Specifying, page 181	Adjustable straps support CPUs with perimeters up to 53".	Weight of 60 lb.		Weight	5 lb
CPU Trolley	Product Details CPU trolley securely	CPU trolley accommo- dates CPUs 5 ¹ /4"W to	Surface Materials		Dimension
	holds CPU in vertical posi-	8 ¹ /2"W.	6029 Chalk	Depth	11"
	tion and allows for mobility and access of CPU.	CPU trolley supports a maximum weight of 85 lb.		Width	10"
		maximum weight of oo lo.		Height	10"
Specifying, page 181	CPU trolley is standard with two locking and two non-locking casters.			Weight	7.65 lb
Slatwall/SlatRail Mounted CPU Cradle	Product Details	Small Slatwall/Slatrail CPU cradle accommo-	Surface Materials	Actual D)imension
	Slatwall/Slatrail CPU	dates CPUs with perimeters	Slatwall/SlatRail	Depth	3 ³ /4"
	cradle mounts to Slatwall or SlatRail to secure CPU off	up to 44" and supports a maximum weight of 20 lb.	 mounted CPU cradle 7018 Pewter 	Width	7"
	floor.			Height	93/4"
Specifying, page 182	Slatwall/Slatrail CPU cradle is standard with 72"L velcro strap with buckle to secure CPU.			Weight	1 lb
Vertical Cable Carrier	Product Details	Surface Materials	Actual Dimensions		
	Vertical cable carrier	Vertical cable carrier • 6688 Steel	Width 21/2"		
	has a 52" flexible spine with two management channels		Height 52"		
	to manage cords from below worksurface to the floor.		Weight 1 lb		
 Specifying, page 182 	Vertical cable carrier bracket attaches to the underside of the worksur- face and weighted base sits on floor.				


Cableways



Specifying, page 183

Tip: Cableways may need to be shorter than worksurface width. To determine screen/ cableway and Height-AdjusTable worksurface compatibility see Worktools Compatibility Charts, page 264.

Product Details




Cableway allows user to manage cables and power at worksurface height for a clean aesthetic.

Cableway is a fixed height 1/4" above the worksurface.

Cableway with universal clamp can be used in combination with privacy and modesty screens. See page 352

Gap between worksurface and cableway is 1" to allow for cables to feed through.


Cableway is 3" shorter than screen width to accommodate universal clamp.



Universal clamp, if selected, is for use with worksurfaces 1" to 2" thick.

Universal clamp, if selected, uses a 2" footprint above and below worksurface.

Universal clamp, if selected, is standard with rubber feet to ensure a tight fit without marring worksurface.



Horizontal brackets, if selected, screw into underside of worksurface.

Horizontal brackets,

if selected, require 2" of clearance below worksurface.

Application Topics

Cableway/Screen Width

Slatkal Width 24" 30" 36" 42" 48" 60" 22" 48" 60" 48" 60" 22" 48" 60" 48" 60" 22" 48" 60" 48" 60" 22" 48" 60" 48" 60" 25"/28" 49" 54" 54" 54" 54" 54" 54" 54" 54" 54" 54" 54" 54" 54" 54" 54" 54" 54" 54" 54" 54" 54" 54" 54" 54" 54" 54" 54" 54" 54" 54" 54" 54" 54" 54" 54" 54" 54" 54" 54" 54" 54" 54" 54" 54" 54" 54" 54" 54" 54" 54" 54" 54" 54" 54" 54" 54" 54" 54" 54" 54" 54"

SlatRail stanchions mount on the outside of the screen or cableway

SlatRail stanchions will not work with the screen or cableway

SlatRail stanchions mount on the inside of the screen or cableway

Tip: SlatRail does not overhang the SlatRail stanchions; therefore, it is important to order the appropriate SlatRail size when used in combination with screens and cableway.

Surface Materials

Cableway, Universal clamp, and horizontal bracket • 0835 Black

• 4799 Platinum

Actual Dimensions

Depth	21/2"
Width	25", 31", 37", 43", 49", 55", or 61"
Height	8"
Weight	4.7 lb-15.15 lb

See specifying page 183 for exact weight.

Technology Worktools and Cable Management

Corner Fillers



Tip: 18"W corner filler creates a 17" diagonal application. 22"W corner filler creates a 21" diagonal application.

		Standard Inclu	des	Required to Specify
	ed help? uct details, 174	Corner filler: 7027 Charcoal paint		Style number
Sp	ecification	Information		
• Dim D	nensions W	• Style Number	•U.S. Price	
18"	Corner Fil	llers		
For	Use with 1 ¹ /	4" Thick Worksurface	es	
13"	24"	CCWS18125	\$129	
For	Use with 1 ¹ /	2" Thick Worksurface	es	
13"	24"	CCWS18150	\$129	
For	Use with Se	ries 9000 Worksurfac	es	
13" :	24"	CCWS189	\$129 :	
22"	Corner Fil	llers		
For	Use with 1 ¹ /	4" Thick Worksurface	25	
13"	28"	CCWS22125	\$129	
For	Use with 1 ¹ /	2" Thick Worksurface	es	
13"	28"	CCW\$22150	\$129	
For	Use with Se	ries 9000 Worksurfac	es	
13" :	28"	CCWS229	\$129 :	

Freestanding In-Line Document Support



Standard Includes Required to Specify ▶ Need help? Freestanding in-line document support: 6000 Black Style number Product details, page 174 **Specification Information** • Dimensions • Style ·U.S. D w н Number Price 18" 14" CDFIS14 12" \$117

For Canadian Pricing Multiply U.S. Price by the Canadian price factor. See page 1 for details.

Monitor Blocks



	Standard Includes	Required to Specify
Need help? Product details, page 174	Monitor blocks, package of 3: plastic	1 Style number 2 Plastic color number for monitor blocks: 6152 Champagne 6153 Pewter 6288 Charcoal

Spe	ecifica	ation Inf	ormation	
Dim D	nension W	is H	• Style Number	·U.S. Price
12"	12"	11/2"	СМИВЗ	: \$84
			:	:

Adjustable Foot Rest



	Standard	Includes	Required to Specify
ed help? uct detail 174	Adjustable foo	t rest: 6000 Black plastic	Style number
ecifica Iension W	formation Style Number	· U.S. Price	

Mobile Collapsible Laptop Support



Tip: Mobile collapsible laptop support is for use with laptops that open past 90° only.

	d help? ct details 175		iptop support: bri	ushed aluminum	Style number
Spe	cifica	tion Inf	ormation		
• Dime D	ensions W	, H	• Style Number	·U.S. Price	
9½ "	121⁄4"	1⁄2"—7"	CMLSA	\$112	



Details Specification Guide

Technology Worktools and Cable Management, continued 179

Required to Specify

Standard Includes

CPU Cradle For Mini Processors



Tip: CPU cradle holds CPUs 2¹/2"W to 5"W and 9³/5"H to 157/10"H. Track is 97/8"D and 5³/4"W.

Tip: CPU cradle requires 10" clearance under the worksurface.

		Sta	ndard Includes	S	Required to Specify
	ed help? uct details, 175		holder and track: 083 nt-adjustable column:		Style number
-	ecificatio ensions W	on Infori H	mation Style Number	·U.S. Price	
: 7"	4"	12"	CPUMINI	: \$169	

Vertical Locking CPU Cradle



Tip: Vertical CPU cradle supports CPUs 31/2"W to 9"W, 15"D to 22"D, 121/2"H to 221/2"H and up to 85 lb.

Tip: CPU cradle requires 18" clearance under the worksurface.

	Standard Includes	Required to Specify
Need help? Product details, page 175	 CPU cradle: 0835 Black Soft touch knob with locking system for side clamp adjustment 17" track Lock mechanism 	Style number
Specificatio	n Information	

Dimensions Style U.S. D W H Price 15" 4" 18¼4" CPRCCL \$207	Specification Information				
15" 4" 181⁄4" CPRCCL \$207					
	15" 4"	181⁄4"	CPRCCL	\$207	

Vertical Non-Locking CPU Cradle



Tip: Vertical CPU cradle supports CPUs 31/2"W to 9"W, 15"D to 22"D, 121/2"H to 221/2"H and up to 85 lb.

Tip: CPU cradle requires 18" clearance under the worksurface.

	Standard Includes	Required to Specify
Need help? Product details, page 175	CPU cradle: 0835 Black Soft touch knob for side clamp adjustment 17"L track	Style number

Vertical Processor Slings

Tip: CPU must be at least 10"D and 31/2"W for both standard and fixed vertical processor slings.

Tip: Standard vertical processor sling supports CPUs with perimeters of 53" and 75 lb.

Tip: Standard vertical processor requires 18" clearance under the worksurface.

Tip: Fixed vertical processor sling supports CPUs with perimeters of 53" and 50 lb.

Tip: Fixed vertical processor sling requires 12" clearance under the worksurface.

Tip: Fixed vertical processor sling is mounted in a fixed position.



Need help? Product details, page 176

▶ Need help?

Standard Includes

Required to Specify

Style number

 Vertical processor sling: 0835 Black • 17"L track for standard vertical processor sling, if selected

Dim D	ension: W	в Н	• Style Number	·U.S. Price
C1	ndard			
3 [a	Iuuiu			

Fixed (For Use with c:scape and FrameOne)

Standard Includes

· CPU trolley that supports CPU vertically: 6029 Chalk

103/4" 33/4" CPRSLFO \$122 6"

CPU Trolley



Tip: Trolley supports CPUs from 51/4"W to 81/2"W and up to 85 lb.

Tip: CPU trolley requires a maximum 10"W floor clearance when fully expanded.



See page 1 for details.

Product details, · Two locking and two non-locking casters page 176 **Specification Information** Dimensions ·U.S. Style D w н Number Price 11" 10" 10" QACPUT \$109

Required to Specify

Style number

Slatwall/SlatRail Mounted CPU Cradles



Tip: Small CPU cradle accommodates CPUs with perimeters up to 44" and 20 lb.

	Si	tandard Includ	Required to Specify		
Need help? Product details page 176		adle: 7018 Pewter		Style number	
Specifica	tion Info	ormation			
Dimension D W	s H	• Style Number	·U.S. Price		
Small CPU	J Cradle				
			\$95		

Vertical Cable Carrier

		Stand	ard Includes	Required to Specify				
	Need help? Product details, page 176		rrier: 6688 Steel ent hardware	Style number				
	Specification Information							
	•Dimensions W H	• Style Number	•U.S. Price					
Tip: Vertical cable carrier	•							
is recommended for use with height-adjustable worksurfaces.	Vertical Ca	able Carrier						
worksunaces.	21/2" 52"	АНСС	\$154					
Tip: Vertical cable carrier affixes under the worksur- face and has a weighted base to hold it in place.	:	:	:					

For Canadian Pricing Multiply U.S. Price by the Canadian price factor. See page 1 for details.

Cableways

Tip: Cableway with universal ► Need help? clamp can be used in combination with privacy and modesty screens. ▶ See page 352

Tip: Cableways may need to be shorter than worksurface width. To determine screen/ cableway and Height-AdjusTable worksurface compatibility see Worktools Compatibility Charts, page 264.

Tip: Cableways are not recommended for use with 221/4"D rectangular Airtouch worksurfaces.

Tip: Cableways with universal clamp are 3" shorter than privacy and modesty screen widths.

Tip: 55"W and 61"W cableways ship with three universal clamps or horizontal brackets. All other cableway widths ship with two universal clamps or horizontal brackets.



Tip: To determine SlatRail compatibility and mounting requirements, see page 177.





Product details, page 177

Standard Includes · Cableway: paint

- · Universal clamp, if selected: paint to match cableway
- · Horizontal mounting bracket, if selected: paint to match cableway

Required to Specify

1 Style number 2 Paint color number for cableway: 0835 Black

4799 Platinum

Dime	ensions		 Weight 	• Style	•U.S.
)	W	н	: -	Number	Price
			:	:	:


th Horizontal Mounting Bracket

21/2"	25"	8"	7.45 lb	AHORZ25	\$ 72
21/2"	31"	8"	8.40 lb	AHORZ31	\$ 92
21/2"	37"	8"	9.35 lb	AHORZ37	\$111
21/2"	43"	8"	10.30 lb	AHORZ43	\$127
21/2"	49"	8"	11.25 lb	AHORZ49	\$148
21/2"	55"	8"	14.20 lb	AHORZ55	\$177
21/2"	61"	8"	15.15 lb	AHORZ61	\$194
:			:	:	

With Universal Clamp

21/2"	25"	8"	4.70 lb	AC25	\$154
21/2"	31"	8"	5.65 lb	AC31	\$171
21/2"	37"	8"	6.60 lb	AC37	\$189
21/2"	43"	8"	7.55 lb	AC43	\$206
21/2"	49"	8"	8.50 lb	AC49	\$222
21/2"	55"	8"	9.95 lb	AC55	\$269
21/2"	61"	8"	10.91 lb	AC61	\$285

Flat Panel Monitor Arms and Supports

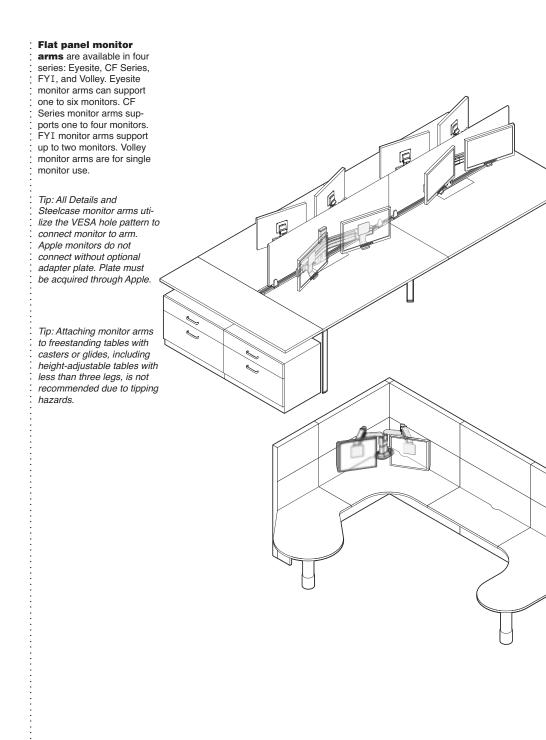

Flat panel monitor

arms are for use in C-clamp, through-mount, and FrameOne, c:scape. CF Series and FYI flat panel monitor arms are also for use with Slatwall and SlatRail applications. Volley flat panel monitor arms are available with C-clamp/through-mount or Slatwall/SlatRail applications only.

See individual series for application limitations.

To select appropriate flat panel monitor arm,

determine mounting application, number of monitors to be supported, weight of monitors to be supported, and whether a dynamic or static arm movement is preferred.

Flat Panel Monitor Arms and Supports

Eyesite

Eyesite display supports are available in several variations: single, dual, or triple monitor; oneover-one, two-over-two, and three-over-three; and single and dual laptop display supports. Quick connect is standard on all Eyesite supports. Cable management is included on all Eyesite display supports. Tip: All Details and Steelcase monitor arms utilize the VESA hole pattern to connect monitor to arm. Apple monitors do not connect without optional adapter plate. Plate must be acquired through Apple.

Product Details

Eyesite arms allow for monitor to rotate portrait to landscape orientation.

Tip: Eyesite is not permitted of use on Elective Elements Technology Worksurfaces.

Eyesite mounting brackets are available in C-clamp, through-mount, FrameOne, c:scape, and Bivi applications.

Mounting brackets must be ordered separately.

To adust the height of the monitor, use the supplied Allen wrench or use a 5/32 hex bit. Turn the adjustment nut right or left to make the monitor go up or down.


All Details and Steelcase monitor

arms utilize the VESA hole pattern to connect monitor to arm. Apple monitors do not connect without optional adapter plate. Plate must be acquire through Apple.


Application Topics

Standard columns can be used with monitor screens 20" or greater.


Extended columns can be used with monitor screens 17"-19".



When mounting, Eyesite arms should only be mounted to c:scape desks that are tethered to either the beam, another desk, or 11/2-High low storage with a connect zone.




Slatwall or SlatRail can be mounted on either side of Eyesite display supports.



Through-mount

Eyesite cannot be C-clamped in front of Stanchion mounted Slatwall or SlatRail. For this application, a through-mount bracket is recommended.



Monitor arms and supports with C-clamp brackets are not recommended on Universal Tables with P-edge as the user's

C-clamp brackets can be used with Universal


edge wraps all the way

around table.

Systems worksurfaces with a P-edge as it is applied to the front edge only.


Monitor cables that

connect to the rear of the monitor near the VESA plate will not fit properly with the Eyesite monitor arm. Use right angle IEC cords or choose FYI or CF Series arm.



triple Evesite on standalone, single-sided FrameOne base units, the worksurface must be 66"W or greater and must be used with Eyesite standard crank adjustable column only.


Eyesite columns may be mounted back to back on double-sided FrameOne worksurfaces when using FrameOne brackets.



Bar-over-bar applications utilize the 26' extended static column only. Bar-over-bar is not permitted on c:scape, Bivi, or Big Table. Bar-over-bar may be used with FrameOne utilizing the static, non-focal adjusting dual and triple static yokes.


Bar-over-bar applica-

tions may be used with Series 3, 5, and 7 worksurfaces with three column base configurations. Barover-bar applications are not permitted for use with Airtouch, any Series 3, 5, or 7 worksurfaces with two column-base configurations, or any freestanding table with casters



laptop supports are not recommended for use with docking station. External keyboard and mouse are recommended.


Tip: Bivi bracket to be used with Eyesite single support, dual display support, single laptop support, and dual laptop support with extended crank adjust columns only.



components, and VESA bracket assembly-slide option to allow greater angle flexibility of individual moni-

Surface Materials

Eyesite display supports, modular components, modular assemblies, and mounting brackets 4799 Platinum



Eyesite Monitor Arms and Support Dimensions

• Feature	es	• Single Flex Yoke	• Single Direct Mount Yoke	•Dual Yoke Focal Adjustable	•Static Triple Yoke	• Static One- Over- One	• Two* Over- Two Focal/ Static	• Static* Three- Over- Three	• Single Laptop	• Dual Laptop
Eyesit	te Display Supports	;	u Alexandro de la construcción de la Construcción de la construcción de						а 	u Antonio antonio
	m Weight per or laptop	20 lb	25 lb	25 lb	25 lb	25 lb	15 lb	15 lb	20 lb	25 lb
Maximu (in 16:9 fc	m Monitor Size** prmat)	30"	24"–27"	24"-27"	24"	30"	24"	24"	N.A.	24"
Functio	nal Focal Length	16"	Fixed	13"	Fixed	Fixed	13" or Fixed	Fixed	16"	13"
Vertical Range	Adjustment Standard column	7 ¹ /2"	71/2"	71/2"	71/2"	N.A.	N.A.	N.A.	71/2"	7 ¹ /2"
	Extended column	12 ¹ /2"	12 ¹ /2"	12 ¹ /2"	12 ¹ /2"	N.A.	N.A.	N.A.	12 ¹ /2"	12 ¹ /2"
Tilt	Forward/backward	10°/90°	10°/90°	10°/90°	10°/90°	10°/-10°	10°/90°	10°/90°	N.A.	10°/90°
Yoke Ro	otation	175°	N.A.	175°	N.A.	175°	175°/N.A.	N.A.	175°	175°
Rotatio	n (portrait to landscape)	Yes	Yes	Yes	Yes	Yes	Yes	Yes	N.A.	Yes
VESA P	late	75 mm/ 100 mm	75 mm/ 100 mm	75 mm/ 100 mm	75 mm/ 100 mm	75 mm/ 100 mm	75 mm/ 100 mm	75 mm/ 100 mm	N.A.	75 mm/ 100 mm
Pivoting Bracket	y VESA t Range (side to side)	90°	90°	90°	90°	-10°	90°	90°	N.A.	90°

*Indicates static column

**Maximum monitor size may be impacted by thickness of monitor and location of VESA bracket mount. Dimensions are estimates. *Tip: Adjustment of monitors is manual and limited by monitor size.*

Tip: All Details and Steelcase monitor arms utilize the VESA hole pattern to connect monitor to arm. Apple monitors do not connect without optional adapter plate. Plate must be acquired through Apple.

Tip: Eyesite single flex mount, when used with monitors with weight concentration at bottom of monitors or all-in-one monitors with CPUs, may be prone to drift.

Eyesite Monitor Arms and Support Dimensions

Eyesite Flat Panel Monitor Arm Support Assemblies

Eyesite Single Display Supports

Tip: Eyesite single display support is for use with monitors up to 20 lb.

Tip: For large monitor screens (20"+), order standard columns. For small monitor screens (17"-19"), order extended columns. Page 207



Tip: Eyesite arms should only be mounted to c:scape desks that are tethered to either the beam, another desk, or 11/2-High low storage with a connect zone.

Tip: Monitor cables that connect to the rear of the monitor near the VESA plate will not fit properly on the Eyesite monitor arm.

Tip: Eyesite is not recommended with 221/4"D Airtouch worksurfaces due to C-clamp interference with the lifting column.

Tip: Eyesite display supports will not fit in front of stanchion mounted Slatwall and SlatRail when using a C-clamp bracket. A throughmount bracket is recommended.

Tip: Monitor arms and laptop supports with C-clamp brackets are not recommended on Universal Tables with P-edge as the user's edge wraps all the way around table. Universal Systems Worksurfaces with P-edge will work as the user's edge is applied to the front only.

	ed help? • Monitor arm: 4799 Platinum luct details, • Mounting bracket: 4799 Platinum • 186			Style number			
Spe	cifica	tion In	formation				
Dime D	ensions W	s H	• Weight	• Style Number	• U.S. Price		
:			:	:			
12"H	l Stan	dard C	rank Adjus	stment Colur	nn		
C-Cla	mp Mo	unt					
6 ⁵ ⁄8"	115⁄/8"	15 ¹ /2"	11 lb	FPAC1CC	\$363		
c:sca	ipe Bra	cket Ma	ount				
65⁄8"	115⁄/8"	15 ¹ /2"	11 lb	FPAC1CS	\$416		

Required to Specify

Specification Information, continued on next page

Standard Includes

Specification Information, continued from previous page

Specification Information								
·Dim	ensio	ns	·Weight	• Style	·U.S.			
D	W	н	-	Number	Price			

12"H Standard Crank Adjustment Column, continued

Through-Mount

65%" 115%" 151/2" 10 lb **FPAC1TM** \$363

FrameOne Mount

65%" 115%" 151/2" 10 lb **FPAC1FO** \$410

Tip: When mounting dual or triple Eyesite on standalone, single-sided FrameOne base units, the worksurface must be 66"W or greater and must be used with Eyesite standard crank adjustable column only.









Tip: Eyesite columns may be mounted back to back on double-sided FrameOne worksurfaces when using FrameOne brackets.



Tip: Bivi bracket to be used with Eyesite single support, dual display support, and dual laptop support with extended crank adjust columns only.

18"H Extended Crank Adjustment Column

C-Cla	C-Clamp Mount									
65⁄8"	115⁄8"	20"	12 lb	FPAEC1CC	\$416					
c:sca	pe Bra	cket M	ount							
65/8"	115⁄8"	20"	12 lb	FPAEC1CS	\$469					
Throu	ugh-Mo	unt								
6 ⁵ ⁄8"	115⁄8"	20"	11 lb	FPAEC1TM	\$416					
Fram	eOne N	lount								
65⁄8"	115⁄8"	20"	11 lb	FPAEC1FO	\$463					

Bivi Mount

65%" 115%" 20" 11 lb **FPAEC1BIVI** \$486

Eyesite Dual Display Supports

Tip: Eyesite dual display support is for use with two monitors up to 27" or less screens and up to 25 lb each. 27" monitors should be use with extended 18" column assemblies or taller.

Need help? Product details, pages 186	 Monitor arm: 47 Mounting brack 		1 Style number 2 Options, if selected (see below)
	Options	U.S. Price	Required to Specify
Bracket	Without pivotWith pivot	No cost +\$18	Specify without pivot. Specify with pivot.
Specificatio	on Information		
Dimensions D W H	·Weight	•Style •U.S. Number Base Price	

Required to Specify

12"H Standard Crank Adjustment Column with Dual Yoke and Focal Adjustment

\$640

FPAC2CC

	P
>	

c:scape Bracket Mount

Tip: Monitor arms and laptop

Systems Worksurfaces with

user's edge is applied to the

P-edge will work as the

front only.

supports with C-clamp

brackets are not recommended on Universal Tables with P-edge as the user's edge wraps all the way around table. Universal

151/2"

C-Clamp Mount 31"

81/2"

81/2" 31" 15¹/2" 16 lb FPAC2CS \$693

16 lb

Standard Includes

Specification Information, continued on next page

Tip: Eyesite arms should only be mounted to c:scape desks that are tethered to either the beam, another desk, or 11/2-High low storage with a connect zone.

Tip: Monitor cables that connect to the rear of the monitor near the VESA plate will not fit properly on the Eyesite monitor arm.

Tip: Evesite is not recommended with 221/4"D Airtouch worksurfaces due to C-clamp interference with the lifting column.

Tip: Eyesite display supports will not fit in front of stanchion mounted Slatwall and SlatRail when using a C-clamp bracket. A through-mount bracket is recommended.



For Canadian Pricing Multiply U.S. Price by the Canadian price factor. See page 1 for details.

Specification Information, continued from previous page

Spe	ecific	ation I	nformation		
• Dim	ensio	ns	 Weight 	• Style	•U.S.
D	W	н		Number	Base
÷					Price

12"H Standard Crank Adjustment Column with Dual Yoke and Focal Adjustment, continued

81/2"	31"	15 ¹ /2"	15 lb	FPAC2TM	\$640	
Fran	eOne	Mount				

18"H Extended Crank Adjustment Column with Dual Yoke and Focal Adjustment

C-Cla	amp Me	ount			
81/2"	31"	20"	17 lb	FPAEC2CC	\$693
c:sca	ape Bra	acket M	ount		
8 ¹ /2"	31"	20"	17 lb	FPAEC2CS	\$746
Thro	ugh-Me	ount			
81/2"	31"	20"	16 lb	FPAEC2TM	\$693
Fram	eOne	Mount			
81/2"	31"	20"	16 lb	FPAEC2FO	\$746
072					
072					
	Mount				





with Eyesite single support, dual display support, and dual laptop support with extended crank adjust columns only.

Tip: When mounting dual or triple Eyesite on standalone, single-sided FrameOne base units, the worksurface must be 66"W or greater and must be used with Eyesite standard crank

adjustable column only.

Eyesite Triple Display Supports

Tip: Eyesite triple display support is for use with three monitors up to 24" screens and 25 lb each.

	Standard Inc	ludes	Required to Specify	
Need help? Product details, pages 186	 Monitor arm: 4799 Mounting bracket: 		1 Style number 2 Options, if selected (see below)	
	Options	U.S. Price	Required to Specify	
Bracket	Without pivotWith pivot	No cost +\$27	Specify without pivot. Specify with pivot.	
Specificatio	n Information			
• Dimensions	•Weight •	Style ·U.S.		

D w н Number Base Price

12"H Standard Crank Adjustment Column with Triple Yoke and without Focal **Adjustment**

C-Cla	amp Mo	unt			
77⁄8"	541⁄2"	151/2"	14 lb	FPAFC3CC	\$693
C:SC	ape Bra	cket Mo	unt		
77⁄8"	54 ¹ /2"	15 ¹ /2"	14 lb	FPAFC3CS	\$746
Thro	ugh-Mo	unt			
77⁄8"	54 ¹ /2"	15 ¹ /2"	13 lb	FPAFC3TM	\$693

Through-Mount

Tip: Eyesite display supports will not fit in front of stan-

chion mounted Slatwall

and SlatRail when using

through-mount bracket is

supports with C-clamp

brackets are not recom-

P-edge will work as the

front only.

user's edge is applied to the

Tip: Monitor arms and laptop

mended on Universal Tables

with P-edge as the user's edge wraps all the way around table. Universal Systems Worksurfaces with

a C-clamp bracket. A

recommended.

Tip: Eyesite arms should only be mounted to c:scape desks that are tethered to either the beam, another desk, or 11/2-High low storage with a connect zone.

Tip: Monitor cables that connect to the rear of the monitor near the VESA plate will not fit properly on the Eyesite monitor arm.

Tip: Eyesite is not recommended with 221/4"D Airtouch worksurfaces due to C-clamp interference with the lifting column.




For Canadian Pricing Multiply U.S. Price by the Canadian price factor. See page 1 for details.

Specification Information, continued from previous page

Sp	ecific	ation I	nformation		
·Dim	nensio	ns	 Weight 	• Style	۰U.S.
D	w	н		Number	Base
-			•	•	Price
				•	

18"H Extended Crank Adjustment Column with Triple Yoke and without Focal Adjustment

C-Cla	mp Mo	unt			
77⁄8"	541/2"	20"	15 lb	FPAFEC3CC	\$746
c:sca	ape Bra	cket M	ount		
77⁄8"	54 ¹ /2"	20"	15 lb	FPAFEC3CS	\$800
Thro	ugh-Mo	unt			
-					\$746

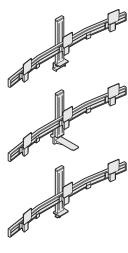



Eyesite Static One-Over-One Display Supports

▶ Need help?

Tip: Eyesite static one-overone display support is for use with two monitors up to 30" and 25 lb each.

Tip: Monitor cables that connect to the rear of the monitor near the VESA plate will not fit properly on the Eyesite monitor arm.



\$410

Required to Specify

Style number



C-Clamp Mount 5³/₄" 4¹/₈" 31³/₄" 11 lb

31³/4" 11 lb **FPAS101CC**

Standard Includes

Extended static column: 4799 Platinum

c:scape Bracket Mount

 53/4"
 41/8"
 313/4"
 11 lb
 FPAS101CS
 \$463

Specification Information, continued on next page

Tip: Eyesite arms should only be mounted to c:scape desks that are tethered to either the beam, another desk, or 1¹/₂-High low storage with a connect zone.

Tip: Eyesite is not recommended with 221/4"D Airtouch worksurfaces due to C-clamp interference with the lifting column.

Tip: Eyesite display supports will not fit in front of stanchion mounted Slatwall and SlatRail when using a C-clamp bracket. A through-mount bracket is recommended.

Tip: Monitor arms and laptop supports with C-clamp brackets are not recommended on Universal Tables with P-edge as the user's edge wraps all the way around table. Universal Systems Worksurfaces with P-edge will work as the user's edge is applied to the front only.

Specification Information, continued from previous page

Spe	ecific	ation I	nformation			
·Dim	ensio	ıs	• Weight	• Style	۰U.S.	
D	w	н		Number	Price	

26"H Extended Static Column, continued

Through-Mount

5³/4" 4¹/8" 31³/4" 10 lb **FPAS101TM** \$410



FrameOne Mount

53⁄4"	41⁄8"	31 ³ /4"	10 lb	FPAS101F0	\$458
-					

Tip: When mounting dual or triple Eyesite on standalone, single-sided FrameOne base units, the worksurface must be 66"W or greater and must be used with Eyesite standard crank adjustable column only.




Details Specification Guide

Eyesite Two-Over-Two Display Supports

Tip: Eyesite dual display support is for use with two monitors up to 24" screens and 15 lb each.

Tip: Bar-over-bar applications utilize the 26" extended static column only. Bar-overbar is not permitted on c:scape, Bivi, or Big Table. Bar-over-bar may be used with FrameOne utilizing the static, non-focal adjusting dual and triple static yokes.

Tip: Bar-over-bar applications may be used with Series 3, 5, and 7 worksurfaces with three column base configurations. Barover-bar applications are not permitted for use with Airtouch, any Series 3, 5, and 7 worksurfaces with two column-base configurations, or any freestanding table with casters.



Need help? Product details, pages 186

Monitor arm: 4799 Platinum
Mounting bracket: 4799 Platinum

Standard Includes

Required to Specify


1 Style number 2 Options, if selected (see below)

	Options	U.S. Price	Required to Specify	
Bracket	Without pivotWith pivot	No cost +\$36	Specify <i>without pivot.</i> Specify <i>with pivot.</i>	

Spe	cific	ation I	nformation			
۰Dim	ensio	ns	 Weight 	• Style	•U.S.	
D	W	н		Number	Base	
					Price	
					•	

26"H Extended Static Column with Dual Yoke and Focal Adjustment

\$1183



 8½"
 31"
 26"
 27 lb
 FPAC2BBDTM

 :
 :
 :
 :
 :

 > Specification Information, continued on next page

Tip: Monitor cables that connect to the rear of the monitor near the VESA plate will not fit properly on the Eyesite monitor arm.



Tip: Eyesite display supports will not fit in front of stanchion mounted Slatwall and SlatRail when using a C-clamp bracket. A through-mount bracket is recommended.

Through-Mount

Tip: Monitor arms and laptop supports with C-clamp brackets are not recommended on Universal Tables with P-edge as the user's edge wraps all the way around table. Universal Systems Worksurfaces with P-edge will work as the user's edge is applied to the front only.

Specification Information, continued from previous page

Specification Information									
• Dim	ensio	ns	 Weight 	• Style	•U.S.				
D	W	н		Number	Base				
					Price				


26"H Extended Static Column with Dual Yoke and without Focal Adjustment

C-Cla	mp M	ount				
81/2"	31"	26"	17 lb	FPAC2BBSCC	\$1087	

\$1087

FPAC2BBSTM





-	
FrameOne	Mount
Flameone	MOULL

Through-Mount

31"

26"

8¹/2"

81/2"	31"	26"	17 lb	FPAC2BBSF0	\$1138

17 lb



Tip: When mounting dual or triple Eyesite on standalone, single-sided FrameOne base units, the worksurface must be 66"W or greater.

Tip: Bar-over-bar applications for use with FrameOne must be used with static columns without focal adjustment yokes only.

Tip: Bar-over-bar applications are not permitted for use with c:scape worksurfaces.




Eyesite Three-Over-Three Display Supports

Tip: Eyesite triple display support is for use with three monitors up to 24" screens and 15 lb each.

Tip: Static yoke must be used when mounting a barover-bar application to FrameOne.

Tip: Bar-over-bar applications utilize the 26" extended static column only. Bar-overbar is not permitted on c:scape, Bivi, or Big Table. Bar-over-bar may be used with FrameOne utilizing the static, non-focal adjusting dual and triple static yokes.



▶ Need help? Product details, pages 186

 Monitor arm: 4799 Platinum Mounting bracket: 4799 Platinum

Standard Includes

	Options		U.S. Price	Required to Specify
Bracket	Without pivotWith pivot	No cost +\$54		Specify without pivot. Specify with pivot.
Specificatio	on Information			
Dimensions D W H	·Weight	• Style Number	•U.S. Base Price	
:	•	:	:	

Required to Specify

2 Options, if selected (see below)

1 Style number

26"H Extended Static Column with Triple Yoke and without Focal Adjustment

C-Clam	p Mount					
7 ⁷ ⁄8" 5	541/2" 26	I	23 lb	FPAC3BBSCC	\$1289	
Throug	h-Mount					

FrameOne Mount

77/8" 541/2" 26" 23 lb **FPAC3BBSFO** \$1343

tions may be used with Series 3, 5, and 7 worksurfaces with three column base configurations. Barover-bar applications are not permitted for use with Airtouch, any Series 3, 5, and 7 worksurfaces with two column-base configurations, or any freestanding table

Tip: Bar-over-bar applica-

Tip: Monitor cables that connect to the rear of the monitor near the VESA plate will not fit properly on the Eyesite monitor arm.

Tip: Eyesite display supports will not fit in front of stanchion mounted Slatwall and SlatRail when using a C-clamp bracket. A through-mount bracket is recommended.

Tip: Monitor arms and laptop supports with C-clamp brackets are not recommended on Universal Tables with P-edge as the user's edge wraps all the way around table. Universal Systems Worksurfaces with P-edge will work as the user's edge is applied to the front only.

For Canadian Pricing Multiply U.S. Price by the with casters. See page 1 for details.

Canadian price factor.

Eyesite Flat Panel Monitor Arm Support Assemblies

Eyesite Single Laptop Supports

Tip: Eyesite flat panel monitor arms with laptop supports are not recommended for use with docking stations.

 Monitor arm: 4799 Platinum ▶ Need help? Product details,

pages 186

· Laptop support and adjustment column: 4799 Platinum

Standard Includes

Mounting bracket: 4799 Platinum

Required to Specify

Style number

Tip: Eyesite is not recommended with 221/4"D Airtouch worksurfaces due to C-clamp interference with the lifting column.

Tip: Eyesite display supports will not fit in front of Slatwall and SlatRail when using a C-clamp bracket a through-mount bracket is recommended.

Tip: Monitor arms and laptop supports with C-clamp brackets are not recommended on Universal Tables with P-edge as the user's edge wraps all the way around table. Universal Systems Worksurfaces with P-edge will work as the user's edge is applied to the front only.









Tip: When mounting dual or triple Eyesite on standalone, single-sided FrameOne base units, the worksurface must be 66"W or greater and must be used with Evesite standard crank adjustable column only.

Spe	cific	ation	Information			
·Dim	ensio	ns	 Weight 	• Style	•U.S.	
D	W	н		Number	Price	

12"H Standard Crank Adjustment Column

C-Clamp Mount								
16"	115⁄8"	15 ¹ /2"	15 lb	FPALC1CC	\$390			
C:SC	ape Mou	unt						
16"	115⁄8"	151/2"	15 lb	FPALC1CS	\$443			
Thro	ugh-Mo	unt						
16"	115⁄8"	15 ¹ /2"	14 lb	FPALC1TM	\$390			
Fran	neOne N	lount						
16"	115⁄/8"	15 ¹ /2"	14 lb	FPALC1FO	\$501			

Specification Information, continued on next page

Specification Information, continued from previous page

·U.S. Price

\$443

\$496

\$443

\$555

FPAELC1CS

FPAELC1TM

FPAELC1FO

FPAELC1BIVI \$513

Specification Information						
Dimensions	Weight	• Style				
D W H	:	Number				

18"H Extended Crank Adjustment Column

15 lb

15 lb

15 lb

16"	115⁄8"	19 ⁷ /8"	16 lb	FPAELC1CC



Through-Mount

FrameOne Mount

115⁄8"

115⁄8"

Bivi Mount

197/8"

197/8"

115/8" 197/8"

16"

16"

16"

C-Clamp Mount

16" 115/8" 197/8" 16 lb





Tip: Bivi bracket to be used with Eyesite single support, dual display support, and dual laptop support with extended crank adjust columns only.




Details Specification Guide

Eyesite Dual Laptop Supports

Tip: Eyesite dual display support is for use with two monitors up to 27" or less screens and up to 25 lb each. 27" monitors should be use with extended 18" column assemblies or taller.

Tip: Eyesite flat panel monitor arms with laptop supports are not recommended for use with docking stations.

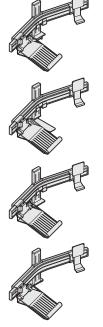

Tip: When mounting dual or triple Eyesite on standalone, single-sided FrameOne base units, the worksurface must be 66"W or greater and must be used with Eyesite standard crank adjustable column only.



		S	tandard I	ncludes		Requ	ired to Specify	
Product details, · L		s, •La		799 Platinum and adjustment col et: 4799 Platinum	,	1 Style number 2 Options, if selected (see below)		
		C	ptions	U	J.S. Price	e Requ	ired to Specify	
Bracket		• W	/ithout pivot /ith pivot		No cost +\$18		Specify without pivot. Specify with pivot.	
Spe	ecifica	ation Inf	ormation					
• Dim • D	nension W	s H	•Weight	• Style Number	•U.S. Base Price			
12"	H Star	dard Cr	ank Adjus	stment Colum	n			
C-Cla	amp Mo	ount						
17"	31"	15 ¹ /2"	20 lb	FPALC2CC	\$687			
c:sc	ape Mo	unt						
17"	31"	15 ¹ /2"	20 lb	FPALC2CS	\$741			
Thro	ough-Mc	ount						
17"	31"	15 ¹ /2"	19 lb	FPALC2TM	\$687			
Fran	neOne	Mount						
17"	31"	15 ¹ /2"	19 lb	FPALC2FO	\$741			
Spec	cificatio	on Inform	ation, conti	nued on next pa	age			
Tip: When planning with stand-alone, single-sided FrameOne base units, and dual or triple monitor arms, the worksurface must be 66"W or greater and monitor arm must be 15½"H maximum.			suppo nd bracke s, mende with P edge v around Syster P-edg user's front o Tip: M nect to	onitor arms and lap rts with C-clamp ets are not recom- ed on Universal Tab -edge as the user's wraps all the way d table. Universal ns Worksurfaces w e will work as the edge is applied to onlor cables that c o the rear of the mo as the VESA plato.	men Airtc oles to C s the l Tip: Tip: chio chio the and C-cl mou on- reco oni-	Eyesite is not recom- ded with 221/4"D puch worksurfaces due -clamp interference with ifting column. Eyesite display supporn not fit in front of stan- n mounted Slatwall SlatRail when using a amp bracket. A through int bracket is mmended.	desk, or 1 ¹ /2-High low stor- age with a connect zone. ts	

April 2015

tor near the VESA plate will

not fit properly on the

Eyesite monitor arm.

Specification Information, continued from previous page

Sp	Specification Information									
·Dim	nensio	ıs	• Weight	• Style	•U.S.					
D	w	н		Number	Base					
					Price					
					•					

------1 O . . 10-1 а.

C-Cla	amp Me	ount				
17"	31"	197/8"	21 lb	FPAELC2CC	\$741	
	ape Mo	ount				
17"	31"	197/8"	21 lb	FPAELC2CS	\$796	
Thro	ugh-Me	ount				
17"	31"	19 ⁷ /8"	20 lb	FPAELC2TM	\$741	
 Fram	eOne	Mount				
17"	31"	19 ⁷ /8"	20 lb	FPAELC2FO	\$796	
Bivi	mount					

Tip: Bivi bracket to be used with Eyesite single support, dual display support, and dual laptop support with extended crank adjust columns only.



Details Specification Guide

Eyesite Modular Components

Modular Arm Components

Tip: Column and mounting bracket must be ordered separately.

▶ Need help? Product details, pages 186

Standard Includes Modular arm components: 4799 Platinum

Required to Specify 1 Style number 2 Options, if selected (see below)

	Options	U.S. Price	Required to Specify
Bracket	 Without pivot Dual adjustable yoke or dual static yoke with pivot 	No cost +\$18	Specify <i>without pivot.</i> Specify <i>with pivot.</i>
	Triple static yoke with pivot	+\$27	Specify with pivot.

Specification Information							
Dim	ensior	ns	·Weight	• Style	• U.S.		
D	W	н		Number	Base		
:					Price		
:					:		

\$163

Single Flex Mount Arm

45⁄8" 115/8" 9¹/2' 5 lb FPC1



FPCL1 45⁄8" 91/2" 6 lb \$283 115⁄8"

Dual Static Yoke

5" 31" 3" 5 lb FPC2SB \$441

Dual Adjustable Yoke

5" 31" 3" 10 lb FPC2 \$499


Triple Static Yoke


541/4" 3" 3" 8 lb FPC3 \$538



when used with monitors with weight concentration at bottom of monitors or all-in-one monitors with CPUs, may be prone to drift.







For Canadian Pricing Multiply U.S. Price by the Canadian price factor. See page 1 for details.

Columns

Tip: For large monitor screens (20"+), order standard columns. For small monitor screens (17"-19"), order extended columns.

Tip: Modular component and mount option must be ordered separately.

Standard Includes	Required to Specify
 Need help? Column: 4799 Platinum Product details, pages 186 	Style number

12" Standard Crank

1"	3"	12 ¹ /2"	3.35 lb	FPCSCC	\$165

18" Extended Crank

1" 17³/8" 3" 4.5 lb FPCECC \$219

26" Extended Static

261/2" 1" 3" 5 lb FPCESC \$200

Tip: 26"H extended static column must be used for two-over-two and threeover-three applications.

Laptop Component



	Standard Includes	Required to Specify
Need help? Product details, page 187	Laptop component: 4799 Platinum	Style number

• Dimensions		 Weight 	• Style	•U.S.	
D V	N	н		Number	Price
:			:	:	:
14" 1	0"	7"	3.4 lb	FPCL	\$132

VESA Bracket/Hook

Tip: VESA bracket/hook is for use with static column.

	Standard Includes	Required to Specify
► Need help? Product details, page 187	Bracket/hook: 4799 Platinum	Style number

• Dimensions		 Weight 	• Style	• U.S.		
D	w	н		Number	Price	
21/2"	4 ¹ /2"	10"	1.7 lb	FPCHTV	\$112	

VESA Bracket Assembly—Slide

Tip: VESA/bracket assembly-slide is for use with dual yoke or triple yoke modular components.

	Standard Includes	Required to Specify
Need help? Product details, page 187	Bracket assembly: 4799 Platinum	1 Style number 2 Options, if selected (see below)

	Options	U.S. Price	Required to Specify
Bracket	Without pivotWith pivot	No cost +\$9	Specify without pivot. Specify with pivot.

Specification Inform Dimensions ·W			 Weight 	• Style	۰U.S.
	W	н		Number	Base Price
	4 ⁵ /16"	9 ¹ /2"	1.25 lb	FPCFTV	\$112



Eyesite Extended Static Column with VESA Bracket/Hook

Eyesite Extended Static Column with VESA Bracket/Hook



Tip: For large monitor screens (20"+), order standard columns. For small monitor screens (17"–19"), order extended columns. Page 207

Tip: Mounting brackets must be ordered separately.

	-	Standard I		Required to Specify		
Product details, page 187			-			
		• Weight	• Style Number	·U.S. Price		
41⁄8"	29¾"	9 lb	FPAS101	\$363		
	ct detail 187 ecifica ension W	d help? • I ct details, 187 ecification In ensions W H	d help? • Modular assem ct details, 187 ecification Information ensions • Weight W H	ct details, 187 ecification Information ensions Weight Style W H Number	d help? • Modular assembly: 4799 Platinum ct details, 187 ecification Information ensions • Weight • Style • U.S. W H • Number Price	



Details Specification Guide

Eyesite Mounting Brackets

Tip: Eyesite is not recommended with 221/4"D Airtouch worksurfaces due to C-clamp interference with the lifting column.



Tip: C-clamp bracket is for use with worksurfaces with a thickness of 1"-15/8".

 \diamondsuit Tip: Through-mount bracket is for use with worksurfaces with a thickness of 1" to 2".

Tip: Eyesite columns may be mounted back to back on double-sided FrameOne worksurfaces when using FrameOne brackets.





Tip: Bivi bracket to be used with Eyesite single support, dual display support, and dual laptop support with extended crank adjust columns only.



Canadian price factor. See page 1 for details.

	Standard I	Required to Specify		
Need help? Product details, page 187	Bracket: 4799 F		Style number	
Specification	n Information			
Dimensions D W H	·Weight	• Style Number	·U.S. Price	
	•	•		

\$ 50

C-Clamp Bracket

3"	4"	2 ¹ /2"	2 lb	FPCCC	

Through-Mount Bracket

3"	4"	1/4"	1.3 lb	FPCTM	\$ 50
					-

FrameOne Bracket

3" 4" 1/4" 1.5 lb **FPCFO** \$ 88

c:scape Bracket

4" 10" 61/2" 2.5 lb **FPCCS** \$107

Bivi Bracket

4" 1/4" **FPCBIVI** 3" 1.5 lb \$124

Eyesite Mounting Brackets

CF Series Flat Panel Monitor Arms

CF Series display sup-

ports are available in several variations: Light-duty arm, standard arm, heavyduty arm, maximum-duty arm, single and double pole mount, and wall-mount display supports.

Additional CF Series

components are available as of April 2014. They are included in the spec guide. Additional application and assembly ideas can be found in *CF Monitor Arms Applications Guide* located on Village.

CF Series light-duty, standard, and heavyduty arms and poles


are available with standard or heavy-duty spring tilthead mechanism. Must specify tilthead mechanism when ordering. Maximum-duty arms are standard with heavy-duty spring tilthead mechanism.

Double-arm pole mount


is available with standard or heavy-duty spring tilthead mechanism. Must specify tilthead mechanism when ordering.

Cable management is included with all CF Series supports.

Tip: All Details and Steelcase monitor arms utilize the VESA hole pattern to connect monitor to arm. Apple monitors do not connect without optional adapter plate. Plate must be acquired through Apple.

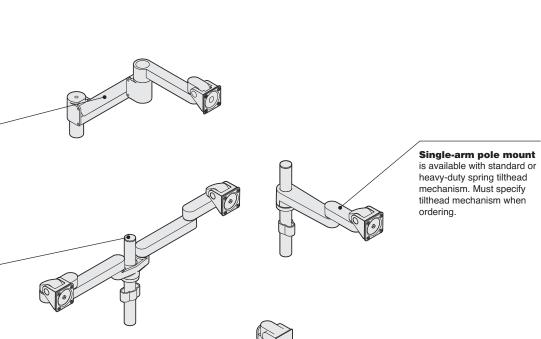

Wall-mount support



CF Series dynamic arms, except CF2500, are standard with 75/100 VESA plate and tilt head. A heavy-duty spring tilt option is available.

When using CF series single arm with CFDU-ALBAR dual monitor support, a heavy-duty spring tilthead is required.

CF Series pole arms and components are available to allow various configurations to meet user needs.

CF Series pole arms are standard with 75/100 VESA plate and tilt head. A heavyduty spring tilt option is available.

CF Series arms allow for monitor to rotate portrait to landscape orientation.

CF Series brackets are available in desk-clamp/ grommet, through-mount, desk-clamp/grommet/ through-mount wall/reverse wall-mount, Slatwall, SlatRail, maximum-duty, FrameOne, and c:scape applications.

Tip: See CF Series Monitor Arm Application Guide on www.steelcase.com for all possible arm configurations.

Mounting brackets for CF Series arms must be ordered separately.

All Details and Steelcase monitor arms utilize the VESA hole pattern to connect monitor to arm. Apple monitors do not connect without optional adapter plate. Plate must be acquired through Apple.

Application Topics


Through-mount CF Series cannot be

mounted in front of stanchion mounted Slatwall when using C-clamp bracket. For this application, a through-mount bracket is recommended. *Tip: Double-arm pole is not*

recommended for use with

either Slatwall or SlatRail

mounting brackets.




Monitor arms and supports with desk-

clamp/grommet are not recommended on Universal Tables with P-edge as the user's edge wraps all the way around table. C-clamp brackets can be used with Universal Systems worksurfaces with a P-edge as it is applied to the front edge only.

Tip: CF Series arms should only be mounted to c:scape desks that are tethered to either the beam, another desk, or 1¹/2-High low storage with a connect zone. Tip: When planning with stand-alone, single-sided FrameOne base units, the worksurface must be 66"W or greater and utilize no more than one single CF Series flat panel monitor arm.


Tip: FrameOne and c:scape CF Series brackets have a maximum load limit of 30 lb. **CFP28 is not** recommended for use with singlesided FrameOne, c:scape, or any freestanding applications.

CF Series display supports are compatible with touch screen monitors.



When mounting CF Series arm brackets to Slatwall, bracket must be mounted no further than 10" away from Slatwall mounting bracket. If application does not allow bracket to be installed within the 10" range, an additional bracket or brackets should be installed within 10" of desired arm location. Tip: Slatwall skin brace package is required when mounting a Details flat panel monitor arm on an Answer slatwall skin.

Tip: Single monitor arm can be mounted on 12"H slatwall skin that has an installed brace package. Tip: Two Details single or one dual monitor arm can be mounted on 18"H or 24"H Answer slatwall skin that has an installed brace package. For optimal stability, the monitor arm should be mounted as shown below:



LED with bracket is available for use with CF Series monitor arms. See page 223

Surface Materials

CF Series monitor arms, pole mounts, brackets, and wallmount support • 0835 Black • 7018 Pewter

LED light housing • 4799 Platinum

• 0835 Black

CF Series Flat Panel Monitor Arms and Support Dimensions

Features	Light-Duty Arm (CF450)	· Light-Duty Arm (CF500)	• Standard Arm (CF800)	• Heavy Duty Arm (CF1000)	• Maximum-Duty Arm (CF2500)	Single Pole (CFSHA)	Double Pole (CFDHA)
•	-		· · ·	•	•	•	•
CF Series Display Suppo	rts						
Maximum Monitor Weight	6–19 lb	2-12.5 lb	9–25 lb	11–31 lb	13-44 lb	5–35 lb	5–35 lb
Maximum Monitor Size (in 16:9 format)**	19"	24"	24"	24"	24"	27"	24"
Functional Focal Length	18"	24"	24"	24"	27"	14"	14"
Vertical Adjustment Range	81/2"	16"	16"	16"	18"	10"	10"
Tilt Forward/backward	200°	200°	200°	200°	200°	200°	200
Lower Arm Rotation	200°	200°	200°	200°	200°	200°	200°
Upper Arm Rotation	360°	360°	360°	360°	360°	360°	360°
Rotation (portrait to landscape)	Yes	Yes	Yes	Yes	Yes	Yes	Yes
VESA Plate	75 mm/ 100 mm	75 mm/ 100 mm	75 mm/ 100 mm	75 mm/ 100 mm	75 mm/ 100 mm	75 mm/ 100 mm	75 mm/ 100 mm
VESA Bracket Range (side to side)	180°	180°	180°	180°	180°	180°	180°

**Maximum monitor size may be impacted by thickness of monitor and location of VESA bracket mount. Dimensions are estimates.

Tip: All Details and Steelcase monitor arms utilize the VESA hole pattern to connect monitor to arm. Apple monitors do notconnect without optional adapter plate. Plate must be acquired through Apple.

CF Series Flat Panel Monitor Arms and Support Dimensions

CF Series Flat Panel Monitor Arms and Supports

▶ Need help?

page 212

Product details,

Tip: Mounting brackets must be ordered separately. See page 221

Standard Includes

Monitor arm: paint
Tilthead mechanism

- **Required to Specify**
- 1 Style number
- 2 Paint color number for monitor arm: 0835 Black
- 7018 Pewter
- 3 Tilthead mechanism (See Required Selections below)

	Required Selections	U.S. Price	Required to Specify
Tilthead	Standard tiltheadHeavy-duty spring tilthead	No cost	Specify with standard tilthead.
Mechanism		+\$25	Specify with heavy-duty spring tilthead.

Specificat	tion Informatio	on
Weight	• Style Number	•U.S. Base Price
iaht_Duty	Monitor Arms	

Light-Duty Monitor Arms				
5 lb	CF450	\$387		
6 lb	CF500	\$414		
:		:		

Standard Monitor Arm

Heavy-Duty Monitor Arm

10.5 lb **CF1000** \$468


Maximum-Duty Monitor Arm

12 lb	CF2500	\$539

Tip: Slatwall skin brace package is required when mounting a Details flat panel monitor arm on an Answer slatwall skin.

Tip: When mounting CF Series arm brackets to Slatwall, bracket must be mounted no further than 10" away from Slatwall mounting bracket. If application does not allow bracket to be installed within the 10" range, an additional bracket or brackets should be installed within 10" of desired arm location.

Tip: Two Details single arms can be mounted on 18"H or el 24"H Answer slatwall skin that has an installed brace package. For optimal stability, the monitor arm should be mounted as shown helow.





Tip: CF450 arm supports monitors 6–19 lb. CF500 arm supports monitors 2 lb–12.5 lb.



Tip: Standard arm supports monitors 9–25 lb.



Tip: Heavy-duty arm supports monitors 11–31 lb.



Tip: Maximum-duty arm supports monitors 13–44 lb.

Tip: Maximum-duty monitor arm is available with heavyduty spring tilthead mechanism only.

Tip: CF450, CF500, CF800, and CF1000 cannot be used with maximum-duty arm bracket CFSPSGLBASE.



CF Series Flat Panel Monitor Pole Mounts with Arms

Tip: Mounting brackets must be ordered separately. ▶ See page 221

	Standard Includes	Required to Specify
Need help? Product details, page 212	 Monitor arm pole mount: paint 12" pole Tilthead mechanism 	1 Style number 2 Paint color number for pole mount: 0835 Black 7018 Pewter 3 Tilthead mechanism (See Required Selections below)

	Required Selections	U.S. Price	Required to Specify
Tilthead Mechanism	Standard tiltheadHeavy-duty spring tilthead	No cost +\$25	Specify with standard tilthead. Specify with heavy-duty spring tilthead.
Related Products	Flat panel monitor brackets		►Page 221

Specification Information				
Height	·Weight	• Style	• U.S.	
		Number	Base	
			Price	

\$325

Single-Arm Pole Mount

14"	6 lb	CFSHA
:	:	:

Tip: Single-arm pole mount supports monitors 5 to 35 lb.



Tip: Double-arm pole mount supports monitors 5 to 35 lb and up to 24" diagonal (16:9 aspect ratio, 22"W side to side). Use of 24" monitors will reduce available focal depth adjustment.

Tip: Double-arm pole is not recommended for use with either Slatwall or SlatRail mounting brackets.


Tip: CFSHA and CFDHA cannot be used with maximum-duty arm bracket CFSPSGLBASE.

Tip: Slatwall skin brace package is required when mounting a Details flat panel monitor arm on an Answer slatwall skin.

Double-Arm Pole Mount

14"	11.5 lb	CFDHA	\$555

Tip: Two Details single arms can be mounted on 18"H or 24"H Answer slatwall skin that has an installed brace package. For optimal stability, the monitor arm should be mounted as shown below:



CF Series Flat Panel Pole Without Arms

		Standard Includes	Required to Specify
	Need help? Product details, page 212	Monitor pole mount: paint	1 Style number 2 Paint color number for pole mount: 0835 Black 7018 Pewter
Tip: Assemblies using CFP28 may not exceed		Related Products	
15 lb per monitor.		Flat panel monitor armFlat panel monitor brackets	► Page 216 ► Page 221
Tip: CFSPSGLBASE is recommended for use with	Specificatio	n Information	

Tip: Cl recommended for use with CFP28 and monitor over monitor configurations.

Tip: A through-mount bracket is recommended when CFP28 is used in monitorover-monitor configurations. Do not use C-clamp mount bracket.

Tip: CFP14, CFP28, CFSARM, and CFDARM cannot be used with maximum-duty arm bracket CFSPSGLBASE.

Specification Information				
Dimensions H	·Weight	• Style Number	·U.S. Price	
14"	2 lb	CFP14	\$121	
28"	3 lb	CFP28	\$159	
	:	•	:	



CF Series Flat Panel Pole Arms

Tip: See CF Series Monitor Arm Application Guide on www.steelcase.com for all possible arm configurations.

▶ Need help? Product detail page 212

	Standard Includes
ils,	Monitor arm: paintTilthead mechanism

Standard In

Required to Specify
1 Style number 2 Paint color number for arm: 0835 Black 7018 Pewter


	Required Selections	U.S. Price	Required to Specify
Tilthead Mechanism	Standard tiltheadHeavy-duty spring tilthead	No cost +\$25 each	Specify with standard tilthead. Specify with heavy-duty spring tilthead.
Related Products	Flat panel monitor armFlat panel monitor brackets		▶ Page 216▶ Page 221

Specification Information			
·Weight	• Style	•U.S.	
	Number	Base	
		Price	





2 lb CFSARM \$123



Dual Pole Arm

4 lb CFDARM \$256



CF Series Flat Panel Monitor Brackets

Tip: Flat panel monitor arm must be used with flat panel monitor brackets, ordered separately.

Tip: When mounting CF Series arm brackets to Slatwall, bracket must be mounted no further than 10" away from Slatwall mounting bracket. If application does not allow bracket to be installed within the 10" range, an additional bracket or brackets should be installed within 10" of desired arm location.




Tip: C-clamp bracket is for use with worksurfaces with a thickness of 1" to $1^{5/8"}$.











	Standard Inclu	des	Required to Specify
Need help? Product details, page 213	Bracket: paint		1 Style number 2 Paint color number for bracket: 0835 Black 7018 Pewter
	Related Produc	sts	
	 Flat panel monitor arm Flat panel monitor pole 		 Page 216 Page 217
Specificati	on Information		
Weight	• Style Number	•U.S. Price	
Desk-Clamp)/Grommet Bracket		
3.5 lb :	CFSPC	\$50 :	
Through-Mo	ount Bracket		
2.5 lb	CFSPTM	\$50 :	
Desk-Clamp)/Grommet/Through·	Mount Bracket	
3.5 lb	CFSPCTM	\$50	
	Well Mount Dree	·	
2.5 lb	Se Wall-Mount Brac	\$50	
2.5 ID :		\$30 :	
Slatwall Bra	acket		
3 lb :	CFSPSW	\$50 :	
SlatRail Bra	acket		
3 lb	CFSPSR	\$50	
Movimum			
	Outy Arm Bracket		
4 lb	CFSPSGLBASE	\$60	

Specification Information, continued on next page

Tip: See CF Series Monitor Arm Application Guide on www.steelcase.com for all possible arm configurations.

Tip: T-shape dual-base bracket is for use with CF450, CF500, CF800, and CF1000 Series monitor arms. Includes CFSPSGLBASE.

Tip: CFSPSGLBASE is recommended for use with CFP28 and monitor over monitor configurations. Tip: A through-mount bracket is recommended when CFP28 is used in monitorover-monitor configurations. Do not use C-clamp mount

bracket.

ERF II PR



Weight Style

Specification Information

Specification Information, continued from previous page

·Weight	• Style Number	·U.S. Price	
FrameOn	e Bracket		
3 lb	CFSPFO	\$ 88	

\$103

\$202

T-Shape Dual-Base Bracket

CFSPCS

3 lb

Dual-Bar Bracket

5 lb	CFDUALBAR

other brackets. Tip: Heavy-duty spring tilthead option must be specified on monitor arm (ordered separately) when using dual-


Tip: When using dual-bar bracket, the maximum weight of monitor is 5 lb less than arm support allows with

Tip: CFDUALBAR is available in 7018 Pewter only.

bar bracket.



CF Series 6"H Flat Panel Arm Extender

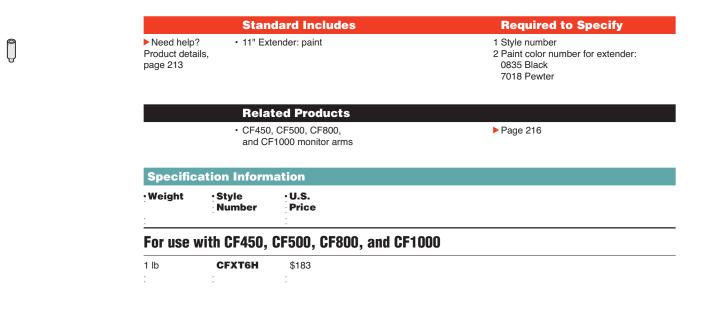

CF Series Wall-Mount Support

	Standard Includes	Required to Specify
Need help?	 Wall-mount bracket: paint 	1 Style number
Product details,	Tilt head	2 Paint color number for bracket:
page 213		0835 Black
		7018 Pewter

Specification Information						
·Weight	• Style Number	•U.S. Price				
3.5 lb :	CFWM	\$119 :				



LED Monitor Light with Bracket


U S


	Standard I	ncludes	Required to Specify
Need help? Product details, page 213	 Light housing: 4 Bracket: 0835 B 4-watt LED 9' cord: black pla Attachment harce 	lack astic only	Style number
Specificati	on Information		
Weight	• Style Number	·U.S. Price	
For Use wit	h CF Series and	FYI Monitor Arms	
0.75 lb	FPALED	\$280	
For Use wit	h Sync		
0.75 lb	FPASYNCLED	\$280	
:	:	:	



Details Specification Guide

FYI Flat Panel Arms

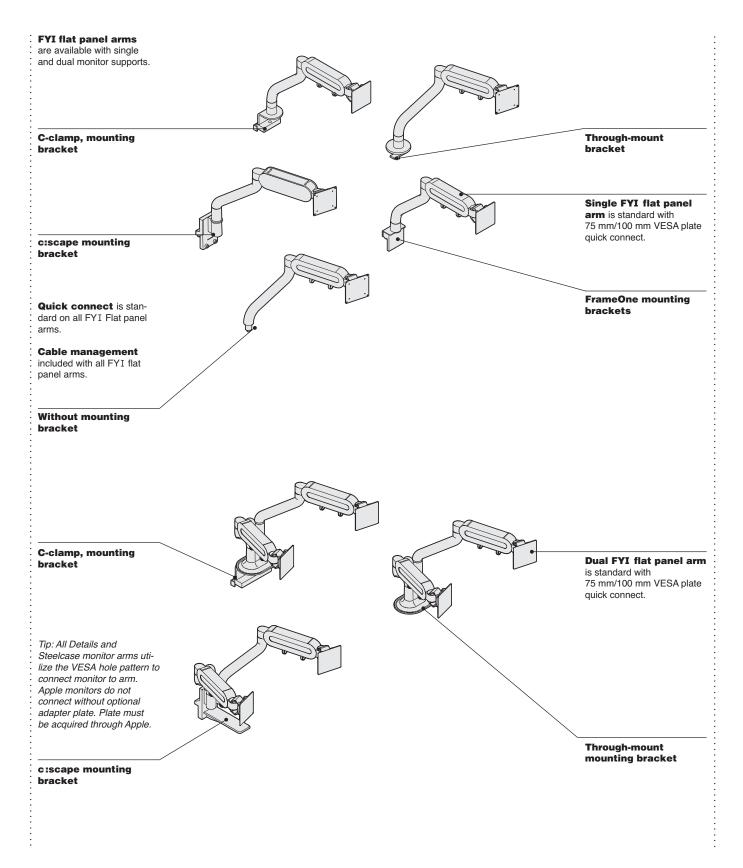




FYI single flat panel arms are available with or without brackets.

Mounting brackets must be ordered separately.

FYI Flat panel arms allow for monitor to rotate portrait to landscape orientation.

Single FYI flat panel arm has a focal adjustability range of $41/2^{"}$ to 24" and vertical adjustment range of $11^{1}/2^{"}$.

Single FYI flat panel arm supports monitor weighing 5 to 20 pounds and up to 30" diagonal.



FYI dual flat panel monitor arms are standard with brackets – C-clamp, through-mount, wall-mount, Slatwall/ SlatRail, and c:scape.

Dual FYI flat panel arm has a focal adjustability range of 41/2" to 24" and vertical adjustment range of 111/2".

Dual FYI flat panel arm supports monitors weighing 2 to 20 pounds and accom-

modates monitors 19" to 27". Tip: The larger the monitor, the less focal adjustment. 27" monitors are limited to approximately 19" of forward travel from the back of the

All Details and Steelcase monitor


worksurface.

arms utilize the VESA hole pattern to connect monitor to arm. Apple monitors do not connect without optional adapter plate. Plate must be acquired through Apple.

Application Topics




panel arms cannot be mounted to glass surfaces and are not intended for use with touch screen monitors or monitors with built in CPUs.




FYI single cannot be mounted in front of stanchion mounted Slatwall when using C-clamp

when using C-clamp bracket. For this application a through-mount bracket is recommended.




When mounting FYI single flat panel arms to Slatwall, bracket must be mounted no further than 10" away from Slatwall mounting bracket. If application does not allow bracket to be installed within the 10" range, an additional bracket or brackets should be installed within 10" of desired arm location.



Monitor arms with Cclamp mounts are not recommended on Universal Tables with P-edge as the user's edge wraps all the way around table.

C-clamp brackets can be used with Universal Systems worksurfaces with a P-edge as it is applied to the front edge only.

When mounting FYI single and dual flat panel monitor arm on c:scape, the desk must be tethered to the c:scape beam, back of another desk or 1½-High low storage file.



When mounting FYI single on stand-alone, single-sided FrameOne base units, the worksurface must be 66"W or greater and utilize one monitor arm only.

Slatwall/SlatRail or wall-mount brackets for FYI upper arm, FYI tilt/pan, and FYI single arm must be ordered separately.

LED with bracket is available for use with FYI flat panel monitor arms. ▶ See page 232

For FYI single applications requiring grommet clamp, mounting in front of stanchion mounted Slatwall or in corners with metal panel interference, order FPASINGLEBBT from SUP catalog (or contact lineone for further options).

Surface Materials

FYI flat panel monitor arms and mounting brackets

- 4231 Arctic White
- 4710 Low Gloss Black
 4799 Platinum

FYI upper arm

- 6000 Black
- 6009 Arctic White6544 Frost
- FYI tilt/pan

 Bright metal

FYI flat panel monitor arm and handle for use with Sync

4799 Platinum

FYI Sync hardware pack • 7018 Pewter

LED light housing4799 Platinum

LED bracket • 0835 Black

FYI Flat Panel Arms and Support Dimensions

·Features	Single	Dual
EVI Flat Danal Diamlay Comparis	:	
FYI Flat Panel Display Supports		
Maximum Monitor Weight	5–20 lb	5–20 lb each
Maximum Monitor Size** (in 16:9 format)	30"	19"-27" each*
Functional Focal Length	24"	151/2"-24" each***
Vertical Adjustment Range	111⁄2"	111/2" each
Tilt Forward/backward	30°/20°	30° each/20° each
Lower Arm Rotation	200°	100° each
Upper Arm Rotation	360°	360° each
Rotation (portrait to landscape)	Yes	Yes
VESA Plate	75 mm/100 mm	75 mm/100 mm
VESA Bracket Range (side to side)	160°	160° each

*Dual FYI flat panel arm supports monitors weighing 5 to 20 pounds and accommodates monitors 19" to 27".

Tip: The larger the monitor, the less focal adjustment. 27" monitors are limited to approximately 19" of forward travel from the back of the worksurface.

**Maximum monitor size may be impacted by thickness of monitor and location of VESA bracket mount. Dimensions are estimates. *Tip: All Details and Steelcase monitor arms utilize the VESA hole pattern to connect monitor to arm. Apple monitors do not connect without optional adapter plate. Plate must be acquired through Apple.*

Tip: FYI monitor arms rotate 20° at the base of the arm to allow maximum flexibility. Maximum rotation may result in monitor making contact with mounted privacy screens.

***FYI Dual can be used with monitors up to 27" in 16:9 format and will reduce to focal depth to 151/2".

FYI Single Flat Panel Monitor Arms and Supports with Mounting Brackets

FYI Single Flat Panel Monitor Arms and Supports with Mounting Brackets

Tip: FYI flat panel arm support is for use with monitors 5 to 20 lb.

Tip: When planning with stand-alone, single-sided FrameOne base units, the worksurface must be 66"W or greater and utilize no more than one single FYI flat panel monitor arm.

Tip: FYI flat panel monitor arm is not for use in front of stanchion mounted Slatwall.

Tip: Monitor arms with Cclamp brackets are not recommended on Universal tables with P-edge as the user's edge wraps all the way around. Universal Systems Worksurfaces with P-edge will work as the user's edge is applied to the front only.

Tip: C-clamp bracket is for use with worksurfaces with a thickness of 1" to $2^{1}/2"$.



Tip: Through-mount bracket is for use with worksurfaces with a thickness of 1" to $1^{1/2}$ ".





Tip: FYI flat panel monitor arms should only be mounted to c:scape desks that are tethered to either the beam, another desk, or 11/2-High low storage with a connect zone.



Multiply U.S. Price by the Canadian price factor. See page 1 for details. Need help?
 Product details, page 224

- Standard Includes
 Monitor arm: paint
- 75 mm/100 mm VESA plate
 Mounting bracket

- **Required to Specify**
- 1 Style number 2 Paint color number for monitor arm: 4231 Arctic White 4710 Low Gloss Black
 - 4799 Platinum

Spe	cific	atior	Information		
Dim	ensio	ns	·Weight	• Style	· U.S.
D	w	н		Number	Price

C-Clamp Mounting Bracket

4"	14"	15"	13.5 lb	FPASINGLECC	\$384

Through-Mount Mounting Bracket

4" 14" 15" 12.5 lb **FPASINGLETM** \$384

FrameOne Mounting Bracket

14" 15" 13.5 lb **FPASINGLEFO** \$384

c:scape Mounting Bracket


4"

9" 14" 15" 15 lb

DFPASINGLECS \$425

Tip: Slatwall skin brace package is required when mounting a Details flat panel monitor arm on an Answer slatwall skin.

Tip: Single monitor arm can be mounted on 12"H slatwall skin that has an installed brace package. Tip: Two Details single monitor arms can be mounted on 18"H or 24"H Answer slatwall skin that has an installed brace package. For optimal stability, the monitor arm should be mounted as shown at right:



FYI Dual Flat Panel Monitor Arms and Supports with Mounting Brackets

Tip: FYI flat panel arm support is for use with monitors 5 to 20 lb each.

Tip: Monitor arms with Cclamp brackets are not recommended on Universal tables with P-edge as the user's edge wraps all the way around. Universal Systems Worksurfaces with P-edge will work as the user's edge is applied to the front only.



Tip: C-clamp bracket is for use with worksurfaces with a thickness of 1" to $2^{1}/2"$.



Tip: Through-mount bracket is for use with worksurfaces with a thickness of 1" to 2".



Tip: FYI flat panel monitor arms should only be mounted to c:scape desks that are tethered to either the beam, another desk, or 1½-High low storage with a connect zone.



Need help? Product details, page 224 Standard Includes
Monitor arms: paint
75 mm/100 mm VESA plates
Mounting brackets

- **Required to Specify**
- 1 Style number 2 Paint color number for monitor arms: 4231 Arctic White 4710 Low Gloss Black 4799 Platinum

Specification Information									
۰Dim	ensior	ıs	• Weight	• Style	۰U.S.				
D	W	н		Number	Price				

C-Clamp Mounting Bracket

5¹/2" 24" 15" 20 lb **FPADUALCC** \$700

Through-Mount Mounting Bracket

 $5^{1}/\!{2}^{"} 24^{"} 15^{"} 20 \ \text{lb} \textbf{FPADUALTM} \700

c:scape Mounting Bracket

9" 24" 15" 27 lb **DFPADUALCS** \$906

: : :

FYI Flat Panel Monitor Arms and Supports with Mounting Brackets

FYI Flat Panel Monitor Arms and Supports with Mounting Brackets

FYI Flat Panel Monitor Arm without Mounting Bracket



Tip: FYI flat panel arm support is for use with monitors 5 to 20 lb.

Tip: Mounting brackets must be ordered separately. ► See page 230

Tip: Except for FPASIN-GLECC, FPASINGLETM. DFPASINGLECS, and FPASINGLEFO please order modular options and mounting bracket separately.

Need help?
Product details,
page 224

Standard Includes Monitor arm: paint • 75 mm/100 mm VESA plate

Related Products

Slatwall/SlatRail mounting bracket

· Wall-mount bracket

Required to Specify 1 Style number 2 Paint color number for flat panel monitor arm: 4231 Arctic White 4710 Low Gloss Black

4799 Platinum

▶ Page 230

▶ Page 230

Specification Information								
Dim D	nension W	ns H	·Weight	• Style Number	·U.S. Price			
4"	14"	15"	10 lb	FPASINGLE	\$335			

FYI Upper Arm

- See	
3	

Tip: FYI flat panel arm support is for use with monitors 5 to 20 lb.

Tip: Mounting brackets must be ordered separately. ▶ See page 230

Tip: When mounting FYI single flat panel arms to Slatwall, bracket must be mounted no further than 10" away from Slatwall mounting bracket. If application does not allow bracket to be installed within the 10" range, an additional bracket or brackets should be installed within 10" of desired arm location.

	Standard Includes	Required to Specify
Need help? Product details, page 224	 Monitor arm: plastic 75 mm/100 mm VESA plate 	1 Style number 2 Plastic color number: 6000 Black 6009 Arctic White 6544 Frost

Related Products

- · Wall-mount bracket
- · Slatwall/SlatRail mounting bracket

▶ Page 230

▶ Page 230

Specification Information						
• Dim D	nension W	s H	• Weight	• Style Number	· U.S. Price	
: 4"	41/2"	10"	: 3.5 lb	FPAUPPER	\$295	
4 :	4.12	10	3.5 ID :	TPAUPPEN	φ 2 90	



FYI Tilt/Pan



Tip: Mounting bracket must be ordered separately. See below

			Standard I	ncludes		Required to Specify
	d help? ct details 224		Tilt/pan knuckle 75 mm/100 mm	0		Style number
			Related Pr	oducts		
			Wall-mount brac Slatwall/SlatRai	cket I mounting bracket		See belowSee below
Spe	cifica	tion Ir	nformation			
Dime	ensions	5	·Weight	• Style	• U.S.	
: D	w	н		Number	Price	
5"	4 ¹ /2"	4 ¹ /2"	2 lb	FPATILTPAN	\$130	

FYI Flat Panel Monitor Arm Mounting Brackets

2 lb

	Standard Includes	Required to Specify
Need help? Product details, page 224	• Bracket: paint	1 Style number 2 Paint color number for bracket: 4231 Arctic White 4710 Low Gloss Black 4799 Platinum

Specifica	tion Informatio	on
Weight	Style	·U.S.
•	Number	Price
:	•	:

Wall-Mount Bracket

3 lb **FPAWALL** \$49

Slatwall/SlatRail Mounting Bracket

FPASWR

F

ſP

Tip: When mounting FYI single flat panel arms to Slatwall, bracket must be mounted no further than 10" away from Slatwall mounting bracket. If application does not allow bracket to be installed within the 10" range, an additional bracket or brackets should be installed within 10" of desired arm location.



For Canadian Pricing Multiply U.S. Price by the

Canadian price factor.See page 1 for details.

\$49

FYI Sync Monitor Arms, Handle, and Mounting Brackets

Tip: FYI flat panel arm support is for use with monitors 5 to 20 lb.

Tip: To use upper or lower monitor arms, specify for use with monitor arm option on the base unit.

Tip: For upper and lower monitor arms, FYI Sync hardware pack must be ordered separately.





4.5 lb	FPASYNCL	\$338

Specification Information





Tip: FPAHANDLE can accept monitors up to 18" of actual horizontal monitor width in a 4:3 format.



Lower Monitor Arm with Slatwall/SlatRail Mount	

FPAHANDLE 1.5 lb \$226

*
For Canadian Pricing
Multiply U.S. Price by the
Canadian price factor.
See page 1 for details.

	Standard Includes	Required to Specify
Need help? Product details, page 225	 Monitor arm and handle: 4799 Platinum Hardware pack, if selected: 7018 Pewter, if selected 	Style number

·Weight	• Style Number	·U.S. Price
Upper Mo	nitor Arm	
10 lb :	FPASYNCU	\$338
Lower Mo	nitor Arm	
4.5 lb	FPASYNCL	\$338
Lower Mo	nitor Arm with Sla	atwall/SlatRail Mount
6.5 lb	FPASYNCSWR	\$384
Handle		

FYI Sync Hardware Pack

0.75 lb **FPASYNCMT** \$48

LED Monitor Light with Bracket


U Ser

	Standard I	ncludes	Required to Specify
▶ Need help? Product details, page 225	 Light housing: 4799 Platinum Bracket: 0835 Black 4-watt LED 9' cord: black plastic only Attachment hardware 		Style number
Specification	on Information		
Weight	• Style Number	·U.S. Price	
For Use witl	h CF Series and	FYI Monitor Arms	
0.75 lb	FPALED	\$280	
	:	:	
For Use with	h Sync		
0.75 lb	FPASYNCLED	\$280	



FYI Flat Panel Monitor Arms and Supports with Mounting Brackets

Volley Flat Panel Monitor Arm

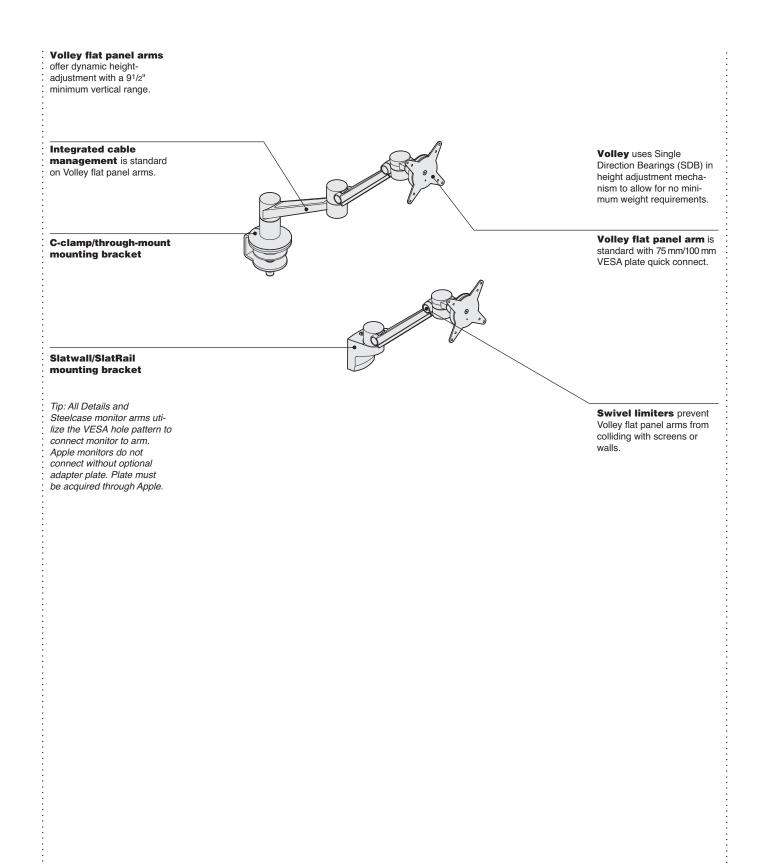

Product Details



Volley flat panels arms are standard with brackets -C-clamp/through-mount or Slatwall/SlatRail.


Volley arms allow for monitor to rotate portrait to landscape orientation.

Volley flat panel arms have a 9¹/2" minimum vertical adjustment range.

Volley flat panel arms support monitors with no minimum weight to 15.4 pounds.

All Details and Steelcase monitor

arms utilize the VESA hole pattern to connect monitor to arm. Apple monitors do not connect without optional adapter plate. Plate must be acquired through Apple.




Volley flat panel arms cannot be mounted in front of stanchion mounted Slatwall when using C-clamp bracket. For this application a through-mount bracket is

recommended.


Application Topics

Volley display supports are compatible with touch screen monitors.



When mounting Volley arm brackets to slatwall, bracket must be mounted no further than 10" away from Slatwall mounting bracket. If application does not allow bracket to be installed within the 10" range, an additional bracket or brackets should be installed within 10" of desired arm location. *Tip: Slatwall skin brace pack*-

age is required when mounting a Details flat panel monitor arm on an Answer Slatwall skin.



Monitor arms and supports with C-clamp are not recommended on Universal Tables with P-edge as the user's edge wraps all the way around table.

C-clamp brackets can be used with Universal Systems worksurfaces with a P-edge as it is applied to the front edge only. Surface Materials Volley flat panel monitor arms and mounting

brackets
Brushed aluminum with white accents



Volley Flat Panel Arms and Support Dimensions

Features	• Single				
Volley Flat Panel Display Supports					
Maximum Monitor Weight	0 - 15.4 lb				
Maximum Monitor Size** (in 16:9 format)	24"**				
Functional Focal Length	24"				
Vertical Adjustment Range	91/2"				
Lower Arm Rotation	190°				
Upper Arm Rotation	360°				
Rotation (portrait to landscape)	Yes				
VESA Plate	75 mm/100 mm				
VESA Bracket Range (side to side)	160°				

**Maximum monitor size may be impacted by thickness of monitor and location of VESA bracket mount. Dimensions are estimates.


Tip: All Details and Steelcase monitor arms utilize the VESA hole pattern to connect monitor to arm. Apple monitors do not connect without optional adapter plate. Plate must be acquired through Apple.

Volley Flat Panel Arms

Tip: Volley flat panel arms support monitors from no minimum weight up to 15.4 pounds.

Tip: Volley flat panel arms support monitors up to a maximum of 24".

States in



Dimensi D W	ons H	• Style Number	·U.S. Price	
;-Clam)/Through-Mc	ount Mounting Brac	ret	



6"	9"	14"	FPVSSW	\$275

Details Specification Guide

Height-AdjusTable Worksurfaces




Workstation Design Tips	260			
AdjusTables Comparison Chart				
Worksurface Shape Overview Worksurface Edge Options Worktools Compatibility Chart				
			Series 3	
			Understanding	274
Specifying	282			
Airtouch				
Understanding	294			
Specifying	300			
Series 5				
Understanding	310			
Specifying	318			
Series 7				
Understanding	330			
Specifying	336			
FitWork: Walkstation and Sit-to-Walkstati	on			
Understanding	344			
Specifying	346			
FitWork: Kybun Footpad				
Understanding	348			
Specifying	349			
Privacy Screens, Modesty Screens, and C	ableways			
Understanding	350			
Specifying	352			
Cable and Power Management				
Understanding	356			
Specifying	358			


Height-AdjusTable Worksurfaces

Statement of Line



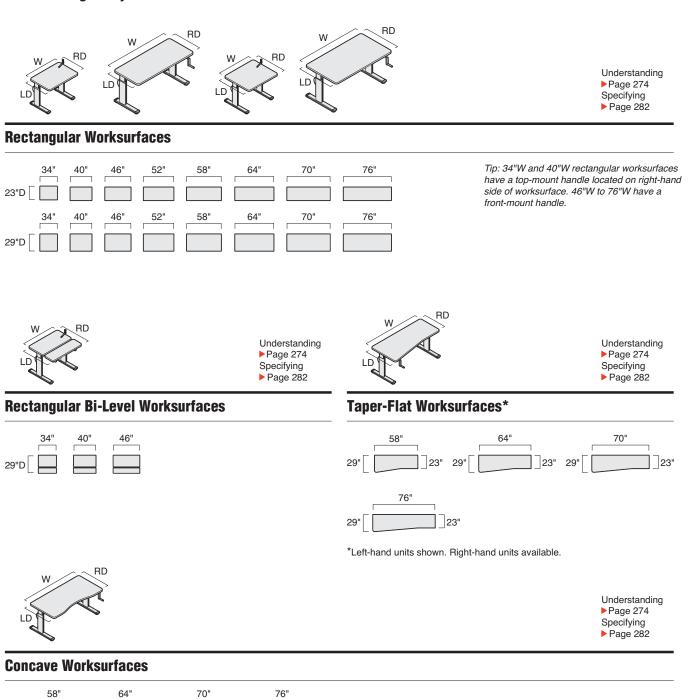


29"

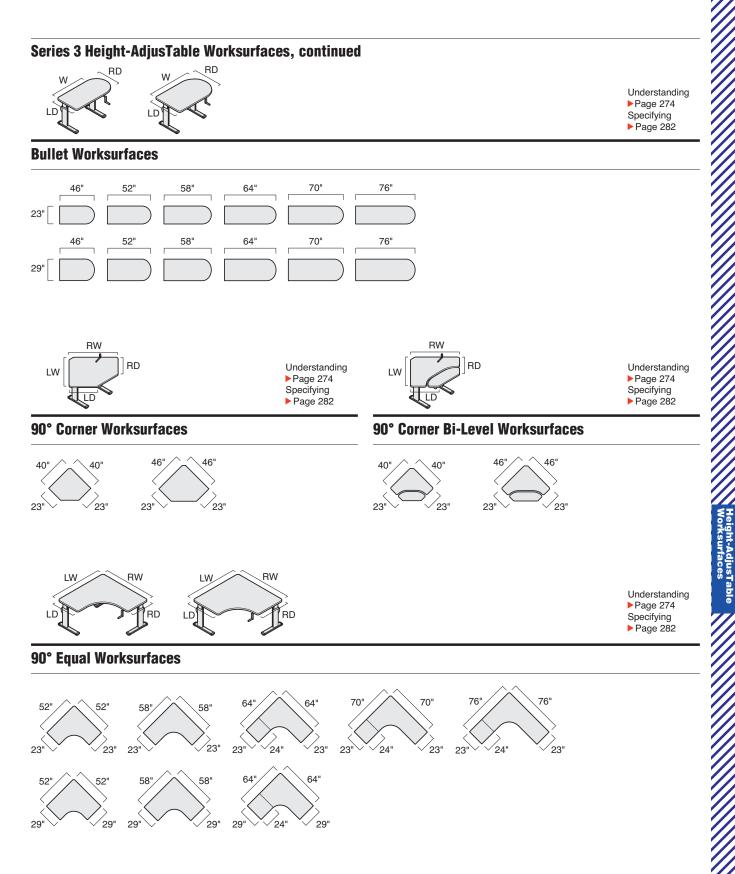


Statement of Line, continued

Series 3 Height-AdjusTable Worksurfaces, continued






90° Extended Worksurfaces*

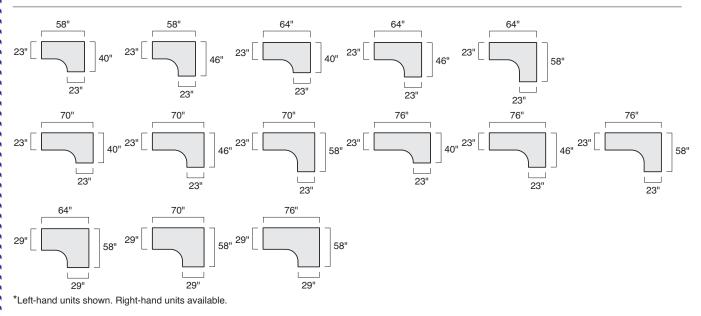




90° Boot Worksurfaces*

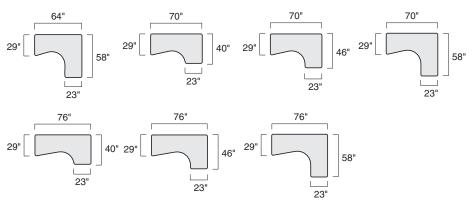


*Left-hand units shown. Right-hand units available.

Series 3 Height-AdjusTable Worksurfaces, continued




Understanding Page 274 Specifying Page 282

P-Table Worksurfaces*

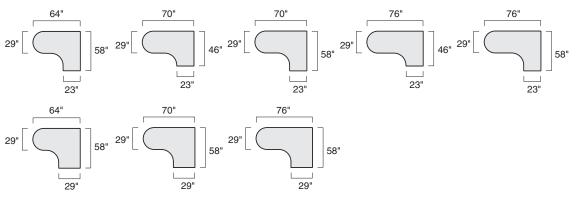


*Left-hand units shown. Right-hand units available.

Tip: 70"W x 40"W and 76"W x 46"W worksurface are standard with top-mount crank.



120° Equal Worksurfaces

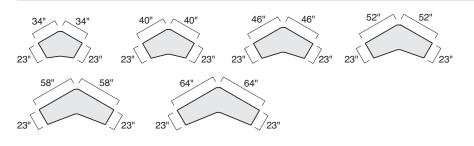

Tip: 34"W x 34"W and 40"W x 40"W worksurfaces are standard with top-mount crank.


Tip: 34"W x 34"W worksurfaces are standard with a two-leg base. All other 120° equal work-surfaces have a three-leg base.

Understanding

Page 274SpecifyingPage 282


Statement of Line, continued

Series 3 Height-AdjusTable Worksurfaces, continued







120° Extended Worksurfaces*

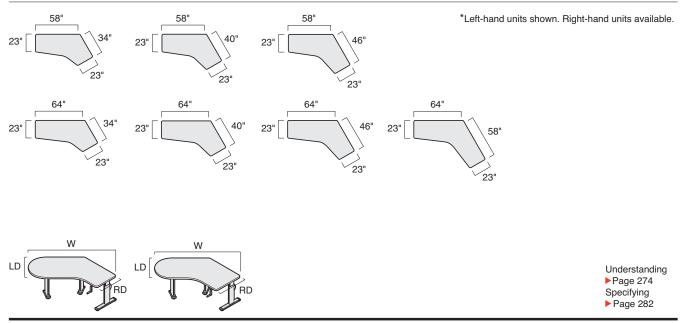

Bubble Jetty Worksurfaces*

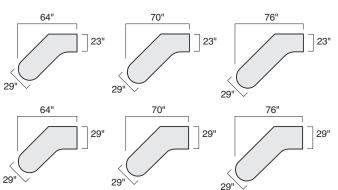


*Left-hand units shown. Right-hand units available.

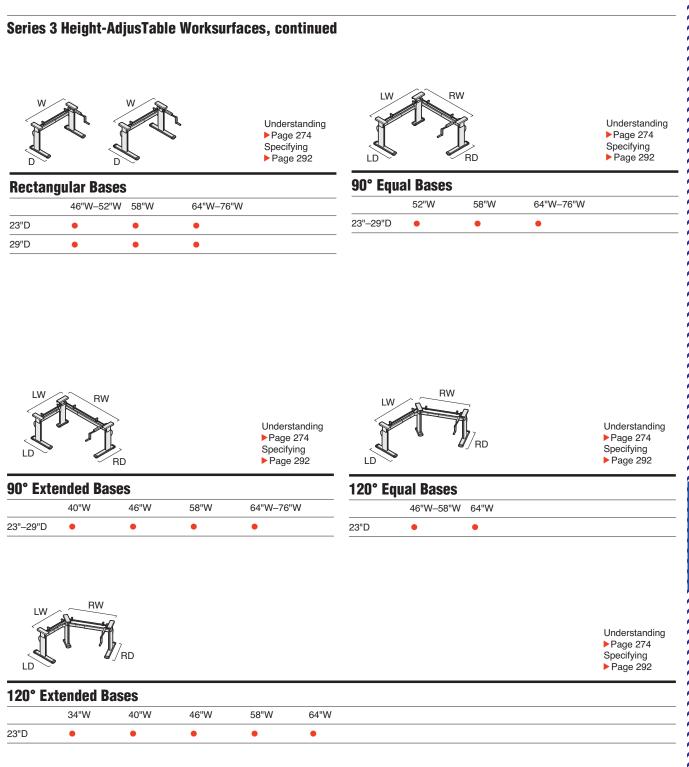


Airtouch Height-AdjusTable Worksurfaces

Universal Tables

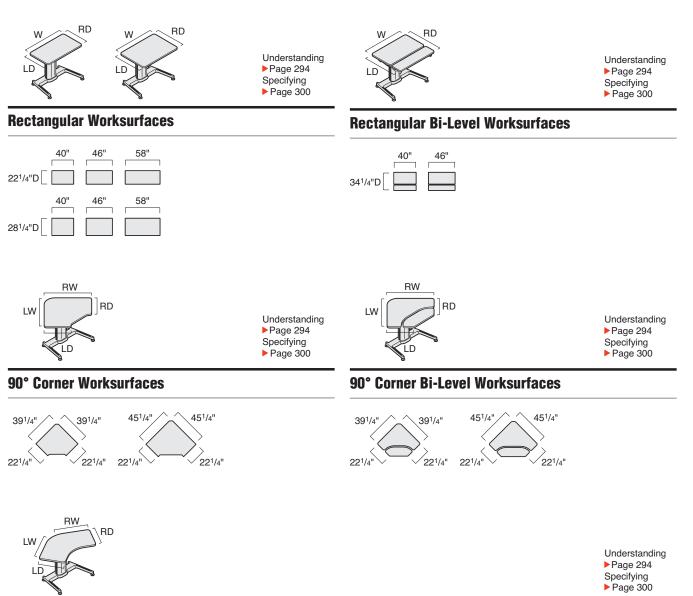

120° Equal Worksurfaces



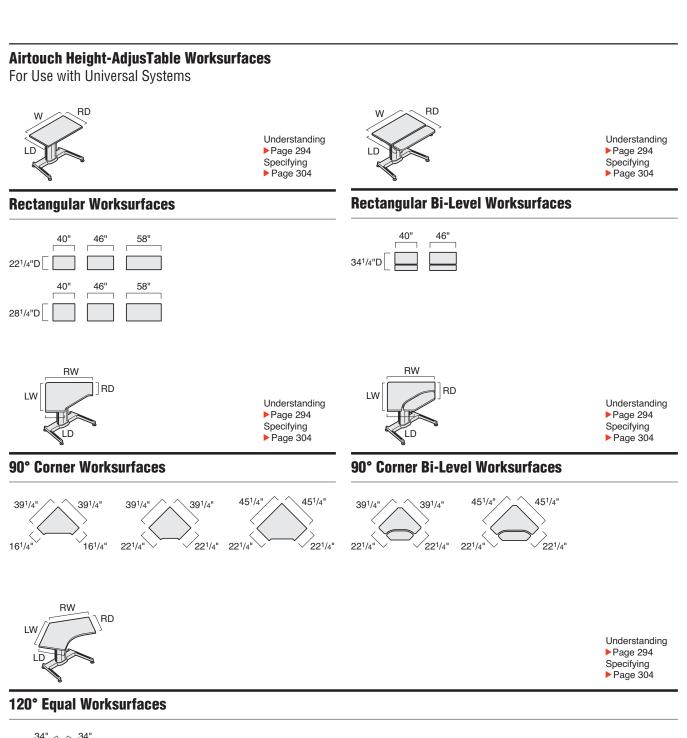




Height-AdjusTable Worksurfaces


Statement of Line, continued

Airtouch Height-AdjusTable Worksurfaces

For Use with Series 9000

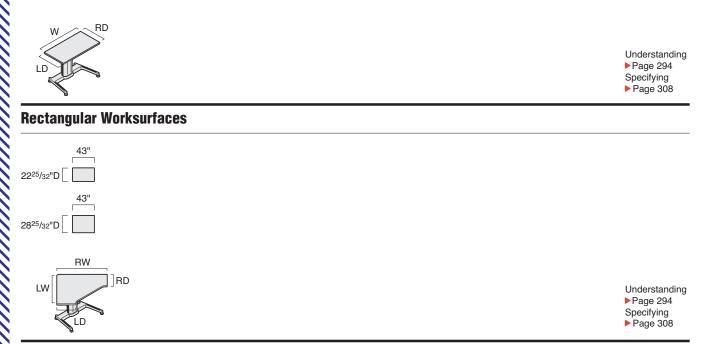

90° Corner Worksurfaces




Series 5 Height-AdjusTable Worksurfaces RD RD W Understanding ▶ Page 310 LD Specifying Page 318 **Rectangular Worksurfaces** 34" 40" 46" 52" 58" 64" 70" 76" 23"D 34" 40" 46" 52" 58" 64" 70" 76" 29"D RD RD Understanding Understanding ▶Page 310 ▶ Page 310 Specifying Specifying Page 318 Page 318 **Taper-Flat Worksurfaces* Rectangular Bi-Level Worksurfaces** 40" 46" 29"D 58" 64" 70" 23" 29" 23" 29" 23" 29" 76" 23" 29" *Left-hand units shown. Right-hand units available. RD Understanding ▶Page 310 I D Specifying ▶ Page 318 **Concave Worksurfaces** 70" 76" 64' 29"

Height-AdjusTable Worksurfaces


Statement of Line, continued

Series 5 Height-AdjusTable Worksurfaces, continued





Understanding Page 310 Specifying Page 318

Bullet Worksurfaces

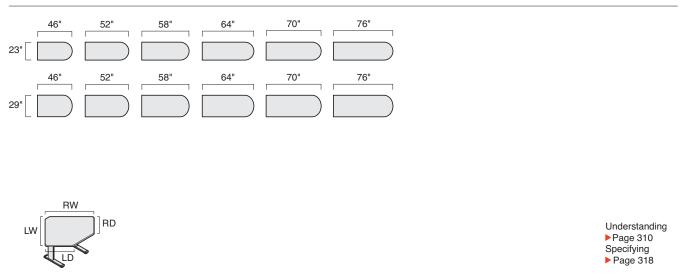


90° Corner Worksurfaces






Understanding Page 310 Specifying Page 318

90° Corner Bi-Level Worksurfaces



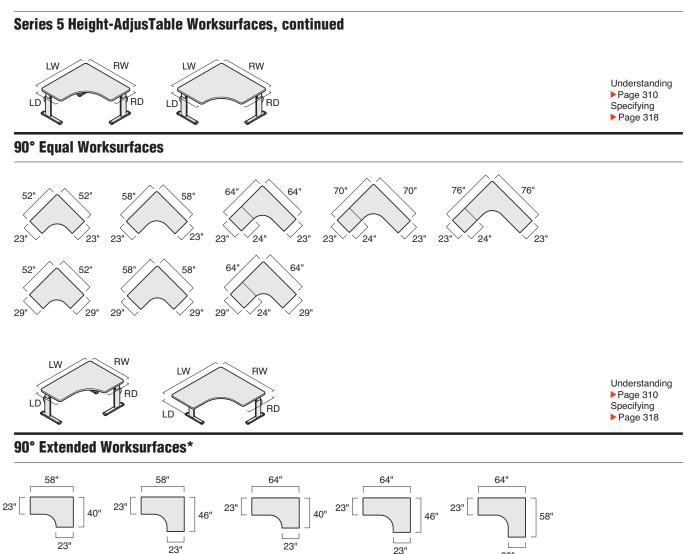

$\begin{array}{c} \begin{array}{c} \begin{array}{c} \begin{array}{c} \begin{array}{c} \end{array}\\ \end{array}\\ \end{array}\\ \end{array}\\ \end{array} \begin{array}{c} \end{array}\\ \end{array} \begin{array}{c} \end{array}\\ \end{array} \begin{array}{c} \end{array} \end{array} \begin{array}{c} \end{array} \begin{array}{c} \end{array} \end{array} \begin{array}{c} \end{array} \begin{array}{c} \end{array} \begin{array}{c} \end{array} \end{array} \begin{array}{c} \end{array} \begin{array}{c} \end{array} \begin{array}{c} \end{array} \end{array} \begin{array}{c} \end{array} \end{array} \begin{array}{c} \end{array} \begin{array}{c} \end{array} \begin{array}{c} \end{array} \begin{array}{c} \end{array} \end{array} \begin{array}{c} \end{array} \begin{array}{c} \end{array} \end{array} \begin{array}{c} \end{array} \begin{array}{c} \end{array} \end{array}$

58"

23"

40" 23"

29

*Left-hand units shown. Right-hand units available.

58"

70"

I.

70"

23"

29"

70"

23"

29"

76"

23" 46"

58" ^{29"}

29"

70"

64"

_____ 23"


23"

29"

58"


Statement of Line, continued

Series 5 Height-AdjusTable Worksurfaces, continued



Understanding
Page 310
Specifying
Page 318

90° Boot Worksurfaces*

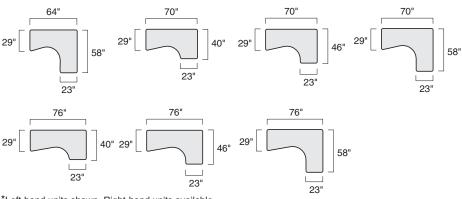


*Left-hand units shown. Right-hand units available.




Understanding Page 310 Specifying Page 318

P-Table Worksurfaces*

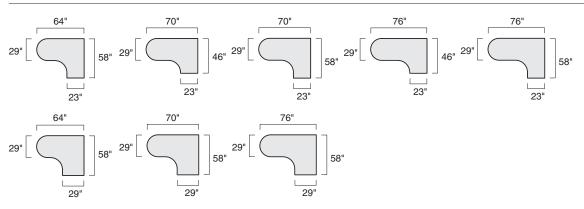


*Left-hand units shown. Right-hand units available.

Series 5 Height-AdjusTable Worksurfaces, continued

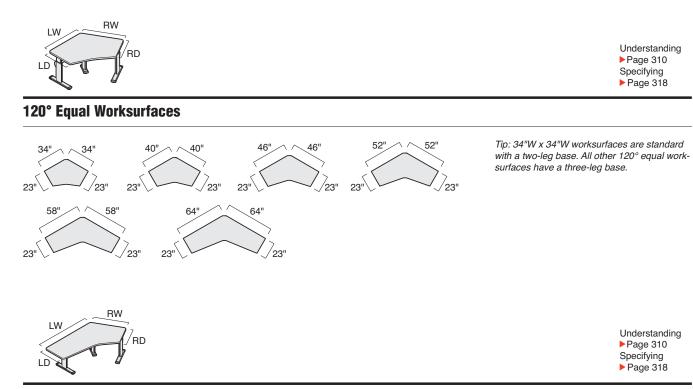


120° Extended Worksurfaces*

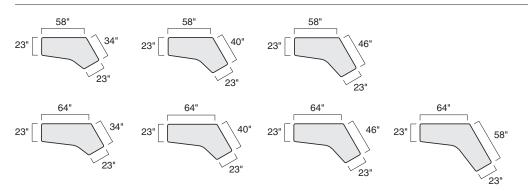

*Left-hand units shown. Right-hand units available.


Statement of Line, continued

Series 5 Height-AdjusTable Worksurfaces, continued





Bubble Jetty Worksurfaces*

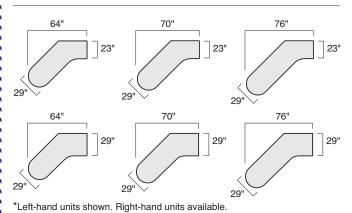

Rectangular Bases

	34"W-40"W	46"W-52"W	58"W	64"W–76"W
23"D	•	•	•	٠
29"D	•	•	•	٠

LW RW Page 310 Specifying Page 328




90° Equal Bases

40"W

•

30 LL	luai Dases			
	52"W	58"W	64"W–76"W	
23"–29"[) •	•	•	

90° Extended Bases										
	40"W	46"W	58"W	64"W-76"W						
23"–29"D	•	•	•	•						

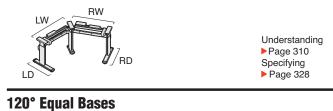

46"W–58"W

•

64"W

•



120° Extended Bases

	34"W	40"W	46"W	58"W	64"W
23"D	•	•	•	•	•

23"D

Series 7 Height-AdjusTable Worksurfaces RD RD w Understanding ▶ Page 330 Specifying Page 336 **Rectangular Worksurfaces** 78" 66" 70" 42" 46' 58" 23"D 🗌 78 29"D RW LW RW RD LW Understanding ▶Page 330 Understanding ▶Page 330 RD Specifying Specifying ▶ Page 336 ► Page 336 90° Corner Worksurfaces 90° Equal Worksurfaces 46 40' 40' 70" 70' 58' 58 23' 23' 23" 23" 23" 24" 23 RW RW LW LW Understanding Understanding RD RD Page 330 ▶Page 330 IΓ Specifying Specifying Page 336 Page 336 90° Extended Worksurfaces* 90° Boot Worksurfaces* 70" 58" 58" 70" 23" 29" 23" 29" 40" 46" 46" 58" L 23" 23" 23' 23" 70" 70" 70" *Left-hand units shown. Right-hand units available. 23" 23" 23" 40" 46" 58"

*Left-hand units shown. Right-hand units available.

23"


23"

Height-AdjusTable Worksurfaces

23"

Statement of Line, continued


Series 7 Height-AdjusTable Worksurfaces, continued








90° Taper Worksurfaces*



*Left-hand units shown. Right-hand units available.



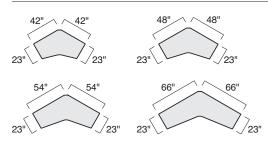









120° Extended Worksurfaces*



*Left-hand units shown. Right-hand units available.

Rectangular Bases

	34"W	42"W-46"W	58"W	66"W	70"W	78"W
23"D	•	•	•	•	•	•
29"D	•	•	•	•	•	•

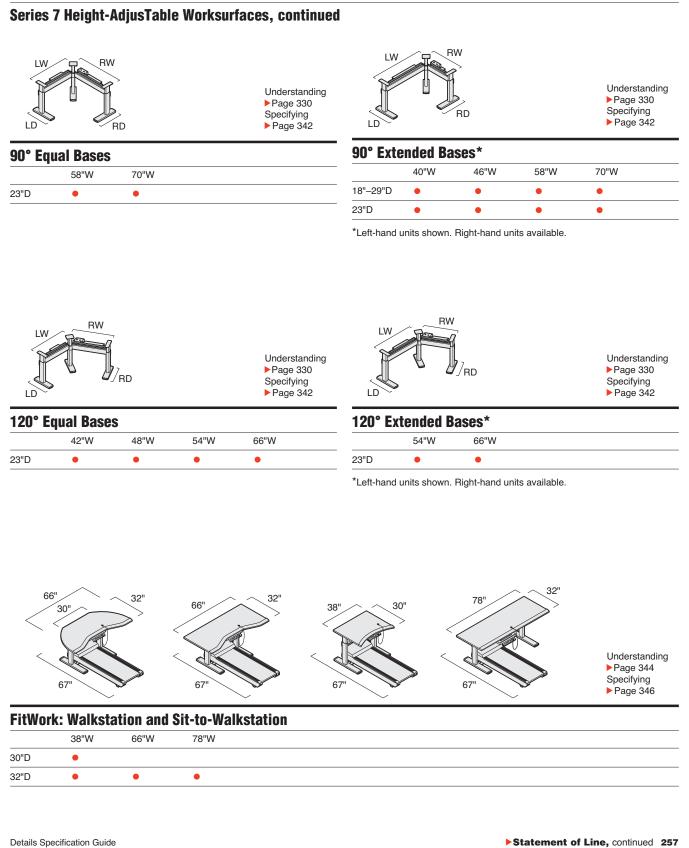

Height-AdjusTable Worksurfaces

Statement of Line, continued

Privacy Screens, Modesty Screens, and Cableways Understanding Understanding ▶Page 350 ▶ Page 350 Prage 050SpecifyingPage 352 Specifying Page 352 **Privacy Screens Modesty Screens** 22"W 28"W 34"W 40"W 46"W 52"W 58"W 64"W 22"W 28"W 34"W 40"W 46"W 52"W 58"W 64"W 22"H • • • • • • • 14"H • • • • • • • • • Understanding ▶Page 351 Specifying Page 354 E. **Cableways** 25"W 31"W 37"W 43"W 49"W 55"W 61"W 8"H • • • • • • •

Cable and Power Management



Understanding

▶ Page 356

Specifying

Page 358



Vertical Cable Carrier 6"D Wire Manager Understanding ▶ Page 356 Specifying Page 358

1³/4"D Wire Manager Understanding ▶ Page 356 Specifying

▶ Page 359



Power/Data with C-clamp Understanding ▶ Page 356 Specifying ▶ Page 359



PowerPincher with Occupancy Sensor Understanding ▶ Page 357 Specifying Page 360

Statement of Line

Details Specification Guide

Workstation Design Tips

Overview

Designing for movement with dynamic

seating, adjustable worktools and height-adjustable worksurfaces are important for today's office workers.

To determine the best Height-AdjusTable solution,

- consider these four criteria:
- 1. Adjustability Needed What is the height range requirement? (seated or sit-to-stand)
- 2. Worksurface Size Needed What does the physical space look like? (worksurface configuration)
- Equipment/Tools Used What type of computer equipment and other worktools are being used on the worksurface? (load capacity)
- 4. Use
- What is the Height-AdjusTable worksurface being used for (individual or shared, touchdown space or full workstation, sit-to-stand or seated)?

Tips

Obstructions Moving worksurfaces can collide with other objects. Do not install overhead storage, stationary pedestals or components in the path of Height-AdjusTable worksurfaces.

Weight

The maximum allowable load (varies by Height-AdjusTable worksurface) should be evenly distributed and must not be exceeded.

Managing Technology

Design workstations with computer equipment in mind so that the height-adjustment range of the Height-AdjusTable worksurface isn't impeded because of cables. Consider the addition of a cableway to help harness these wires and cables.

Power

Plan easy and unobstructed access to electrical outlets for computer equipment and Height-AdjusTable worksurfaces (when applicable).

Width

Series 3, 5, and 7 style number logic and worksurface dimensions correspond and are listed in actual widths. It is important to specify a minimum 1" gap to adjacent furniture. This eliminates any pinch points between a Height-AdjusTable worksurface and a fixed object.


Airtouch style number logic and worksurface dimensions DO NOT

correspond. It is important to utilize actual worksurface dimensions and allow for a minimum 1" gap to adjacent furniture.

Depth

Series 3, 5, and 7 worksurfaces are listed in actual depths; feet extend 1" beyond rear worksurface edge to eliminate pinch points and add clearance for cable access.


Airtouch has varying back pinch points depending on worksurface configuration. Plan pinch points accordingly.

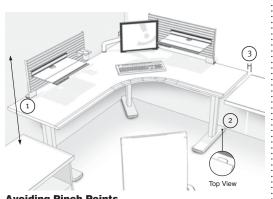

Avoiding Pinch Points

- 1. Keep height-adjustment range free from obstructions above and below the worksurface.
- Feet extend 1" beyond rear worksurface edge (Series 3, 5, and 7 only. Airtouch will vary by worksurface configuration).
- 3. Plan for a minimum 1" gap to adjacent furniture.


AdjusTables Comparison Chart

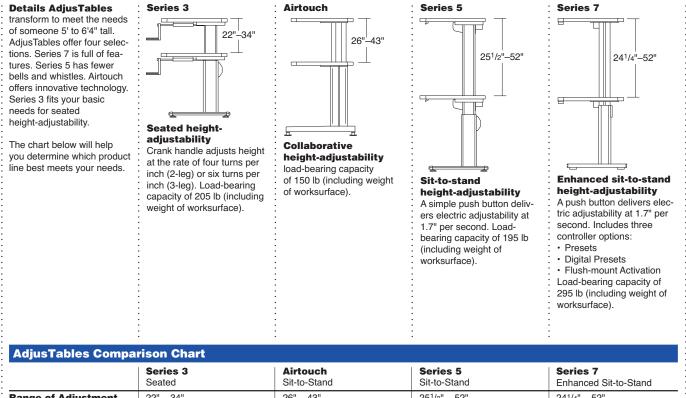


	Seated	Sit-to-Stand	Sit-to-Stand	Enhanced Sit-to-Stand
Range of Adjustment	22" – 34"	26" – 43"	25 ¹ /2" - 52"	241/4" - 52"
With Bi-level Worksurfaces	17 ¹ /2" – 40"	21" - 49"	21" – 58"	N.A.
Type of Adjustment	Crank	Counterforce Mechanism	Electric	Electric
Distributed Weight Capacity (includes work- surface weight)	205 lb	150 lb	195 lb	295 lb
Wire Management Included	No	No	Yes	Yes
Controller	Front-mounted handle Top-mounted handle*	Paddle	Up/down	Up/Down, Presets, Digital Presets
Motor	N.A.	N.A.	Exposed	Enclosed
Decibel Rating	N.A.	N.A.	<50 dBa	<42.5 – 44.1 dBa
Volts	N.A.	N.A.	120v AC	120v AC
Amps	N.A.	N.A.	4.0A	2-leg: 3.4A/3-leg: 5.0A
Watts	N.A.	N.A.	480W	2-leg: 400W/3-leg: 600W
Standby Power	N.A.	N.A.	4.5W	0.1W
Frequency and Phase	N.A.	N.A.	60 Hz, Single Phase	60 Hz, Single Phase
Adjustability Speed	4 or 6 turns/1"	User speed (1 sec.)	1 ⁷ /10"/sec.	1 ⁷ /10"/sec.
Stretcher Design	Telescoping - two piece	N.A.	Telescoping - two piece	One piece
Base Only Availability	Yes	No	Yes	Yes
ANSI/BIFMA (29"D knee depth require- ment for worksurfaces)	Meet or Exceed	Meet or Exceed	Meet or Exceed	Meet or Exceed

*Small configurations only

Worksurface Shape Overview

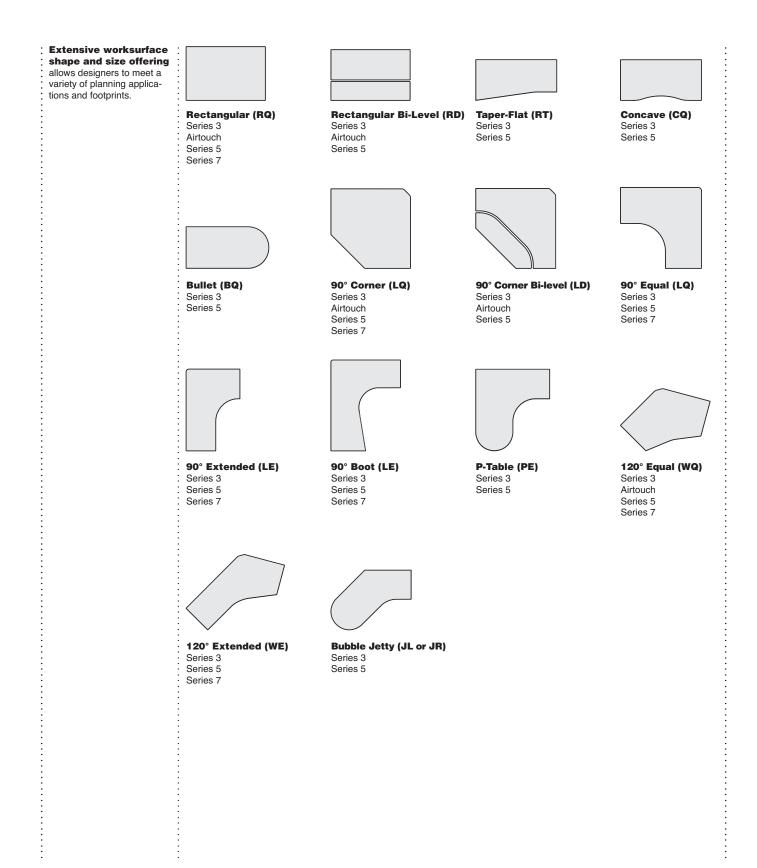

Worksurface Edge Options

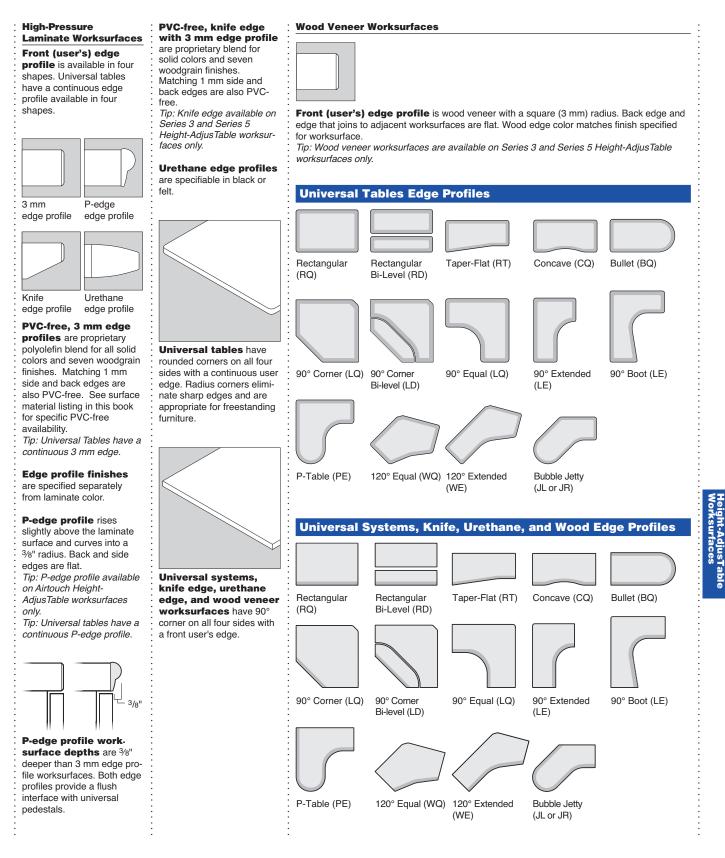

263

Worktools Compatibility Charts


To determine worksurface compatibility with privacy/modesty screens, cableway, SOTO rail, and SlatRail products for each configuration and shape, see compatibility chart below.

Tip: Slatwall stanchions are not applicable because they allow Slatwall to overhang mounting area.

Tip: SlatRail stanchions do not work with the same size screen, SOTO rail, or cableway combination (e.g. 48" SlatRail will not work with 49" cableway and 52" screens) because of clamp location. Specify the SlatRail one size smaller or larger when using in combination (if applicable). See page 351

Tip: For worksurfaces with top-mount handles, the handle sweeps in a circle with a 10" diameter which may interfere with mounting worktools.

Series 3 and 5 Worksurfaces



Series 5 Series 3



Series 3

Tip: Top-mount handle sizes for Series 3 worksurfaces include 34"W and 40"W rectangular and all rectangular bi-level worksurfaces.



	Privacy/Modesty/SOTO Rail									SlatRail				
		28"W	34"W	40"W	46"W	52"W	58"W	64"W	24"W	30"W	36"W	42"W	48"W	60"W
	34"W													
s	40"W	•▲							•▲					
rface:	46"W	•▲	•▲	•▲					•▲	•▲	•			
Irfa	52"W	•▲	• ▲	• ▲	• ▲				•▲	• ▲	• ▲	• ▲		
rksu	58"W	•▲	•▲	•▲	•▲	•▲			•▲	•▲	•	•▲	•▲	
Wor	64"W	•▲	•▲	•▲	•	•	•▲		•▲	• 🔺	•▲	•▲	•▲	
>	70"W	•▲	• ▲	• ▲	• ▲	•▲	•▲	•▲	•▲	• ▲	• ▲	• ▲	• ▲	•▲
	76"W	•▲	•▲	•▲	•▲	•▲	•▲	•▲	•▲	• 🔺	•▲	•▲	•▲	•
		25"W	31"W	37"W	43"W	49"W	55"W	61"W						

.

Cableway

Series 3



Series 5

	0.00 - 1							
		Pri	vacy/	Mode	sty/S	ото і	Rail	
		28"W	34"W	40"W	46"W	52"W	58"W	64"W
es	46"W	•▲						
fac	52"W	•▲	•▲					
sur	58"W	•▲	•▲	• ▲				
Worksurfaces	64"W	•▲	•▲	•	•			
Ň	70"W	•▲	•▲	•▲	•	•		
	76"W	•▲	•▲	• ▲	• ▲	• ▲	• ▲	
		25"W	31"W	37"W	43"W	49"W	55"W	61"W

Bullet

Side A width


Cableway

Side A	width												
	SlatRail												
24"W	30"W	36"W	42"W	48"W	60"W								
•▲													
• ▲	•												
• ▲	• ▲	• ▲											
•	•	•▲	•										
•	•	•	•	•▲									

• ▲

Series 3

▲ = Series 5

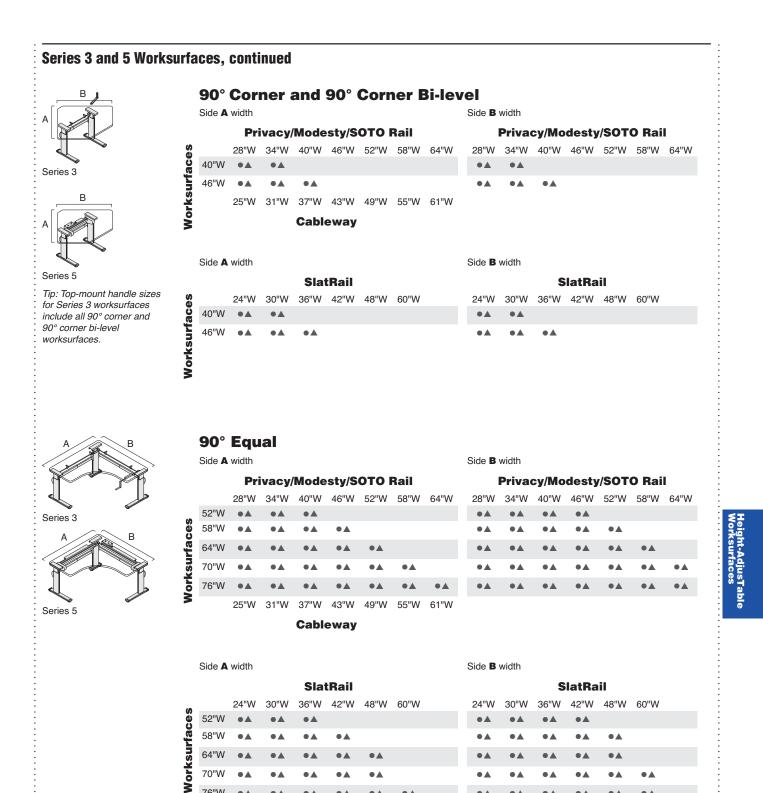

Leg	end	

Series 3

▲ = Series 5

•

•

•

• 🔺

• •

• •

• 🔺

• 🔺

• 🔺

•

• 🛦

•

• 🔺

•

• 4

• 4

70"W

76"W

• ▲

•


• 🔺


• 🔺

•

•









Series 5

Tip: Left-hand units shown. Right-hand units available.



Series 3



Series 5

Tip: Top-mount handle sizes for Series 3 worksurfaces include 46"W P-table worksurfaces only.

Tip: Left-hand units shown. Right-hand units available.

Legend

= Series 3

▲ = Series 5

90° Extended and 90° Boot Side A width

Privacy/Modesty/SOTO Rail 28"W 34"W 40"W 46"W 52"W 58"W 64"W

			0			02		• • • • •
	40"W							
Worksurfaces	46"W							
rfa	58"W	•▲	•▲	• ▲	• ▲	• ▲		
ksu	64"W	•▲	•▲	• ▲	•▲	• ▲	•▲	
Vor	70"W	•▲	•▲	•▲	•▲	•	•▲	•▲
>	76"W	•▲	• ▲	• ▲	• ▲	• ▲	•▲	•▲
		25"W	31"W	37"W	43"W	49"W	55"W	61"W

Cableway

Side A width

S	lat	Ra		
---	-----	----	--	--

		24"W	30"W	36"W	42"W	48"W	60"W	
	40"W							
Worksurfaces	46"W							
Irfa	58"W	•▲	•▲	•▲	•▲	• ▲		
ksu	64"W	•▲	•▲	•▲	•▲	•▲		
Vor	70"W	•▲	•▲	•▲	•▲	•▲	•▲	
>	76"W	• ▲	• ▲	• ▲	• ▲	• ▲	• ▲	


P-Table Side A width

Privacy/Modesty/SOTO Rail

28"W 34"W 40"W 46"W 52"W 58"W 64"W

6	46"W							
Ce	58"W							
Worksurfaces	64"W	•▲	•▲	•▲	•▲			
ksı	70"W	•▲	•▲	• ▲	• ▲	• ▲		
Vor	76"W	•	•▲	•▲	•▲	•▲	•▲	
5		25"W	31"W	37"W	43"W	49"W	55"W	61"W

Cableway

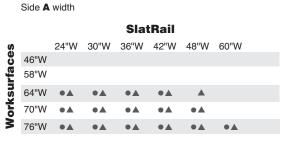

Side B width

Privacy/Modesty/SOTO Rail

		,	,			-
28"W	34"W	40"W	46"W	52"W	58"W	64"W
•▲						
•▲	•					
•▲	• ▲	•▲	• ▲			

		-			
24"W	30"W	36"W	42"W	48"W	60"W
•▲					
•▲	•				
•▲	•▲	•▲	•▲		

SlatRail

Side B width

Side B width


Privacy/Modesty/SOTO Rail

28"W	34"W	40"W	46"W	52"W	58"W	64"W
•▲	•					
•▲	• ▲	• ▲	• ▲	• ▲		

Side B width

ClatDall


		3	атка			
24"W	30"W	36"W	42"W	48"W	60"W	
•	•▲					
•	•▲	•▲	•	•▲		

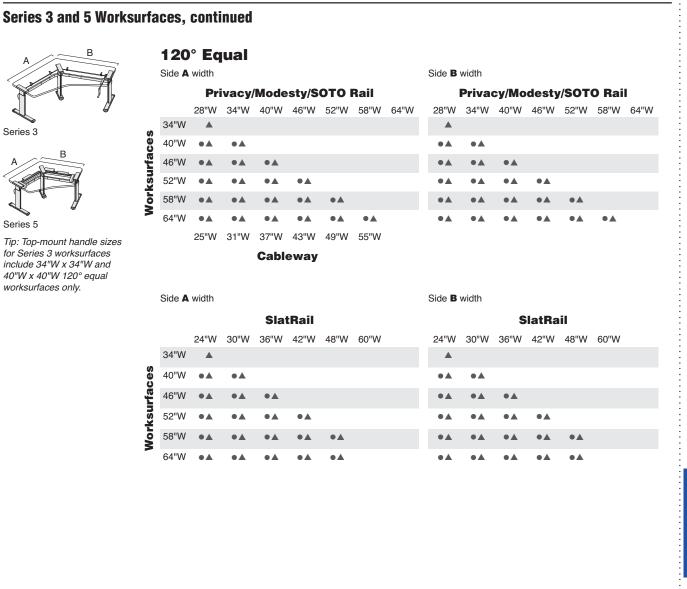

Legend


• = Series 3


▲ = Series 5

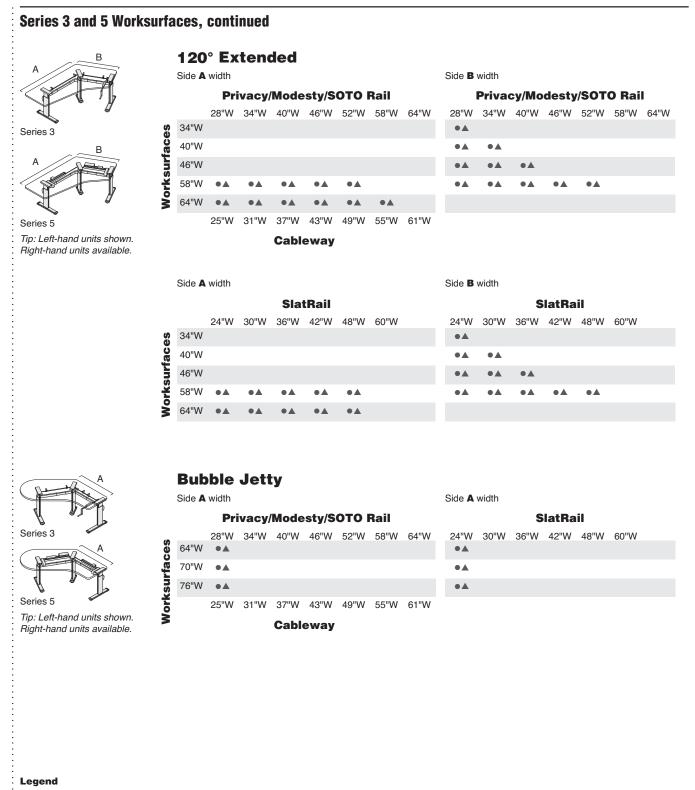



= Series 3


▲ = Series 5

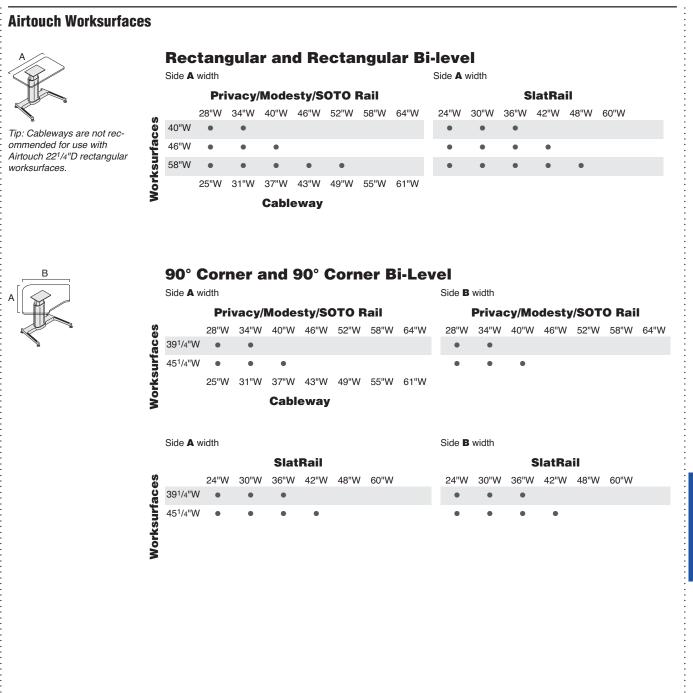

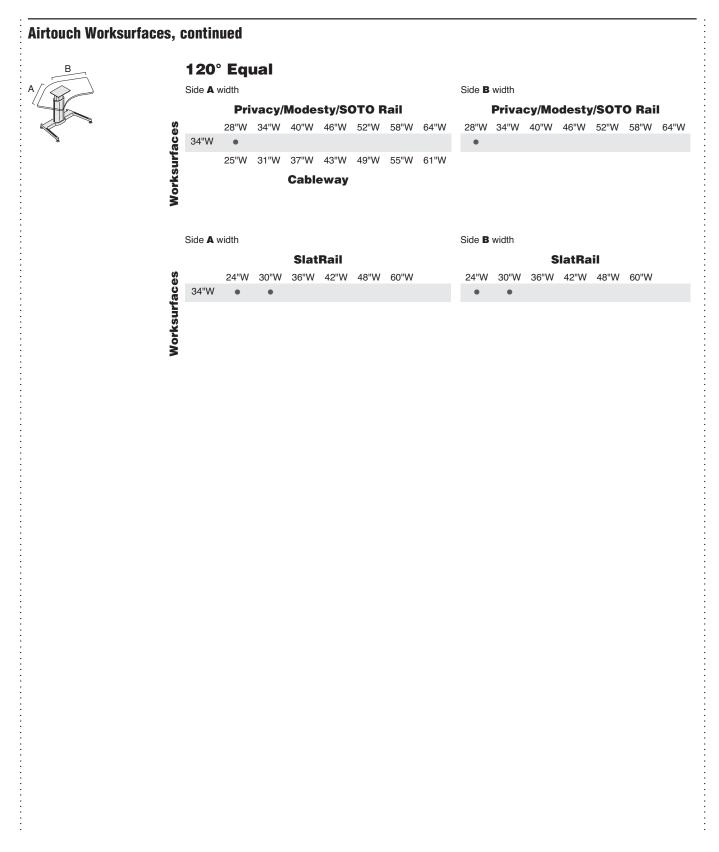

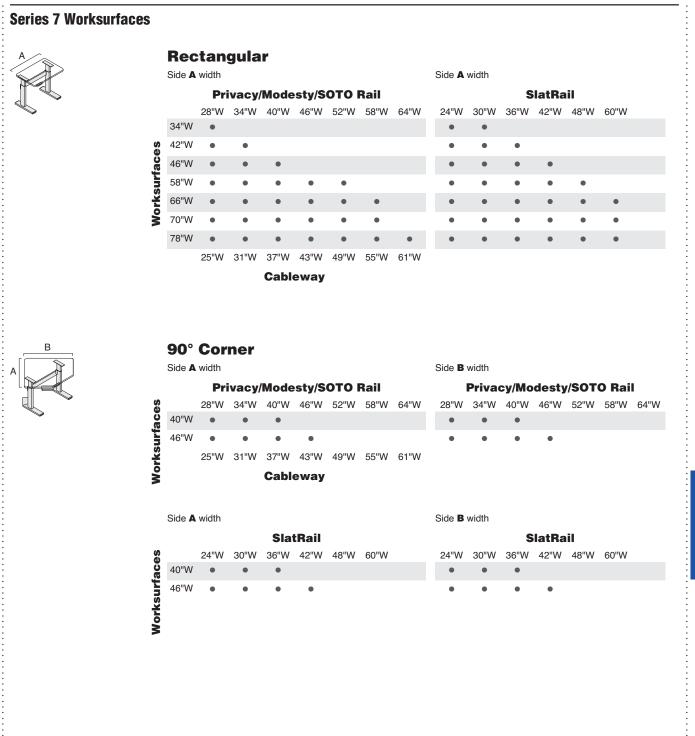

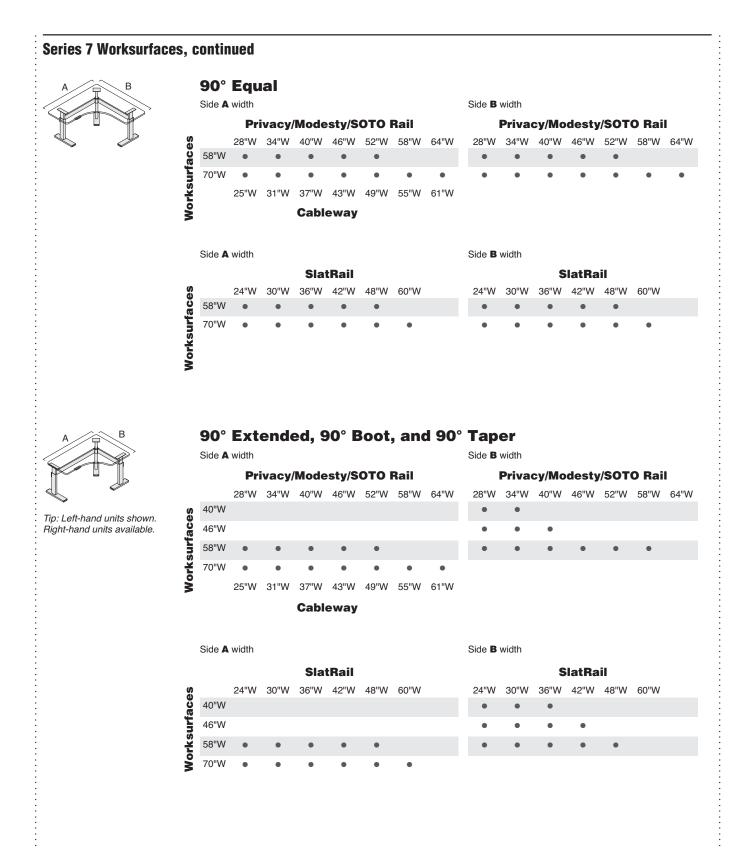

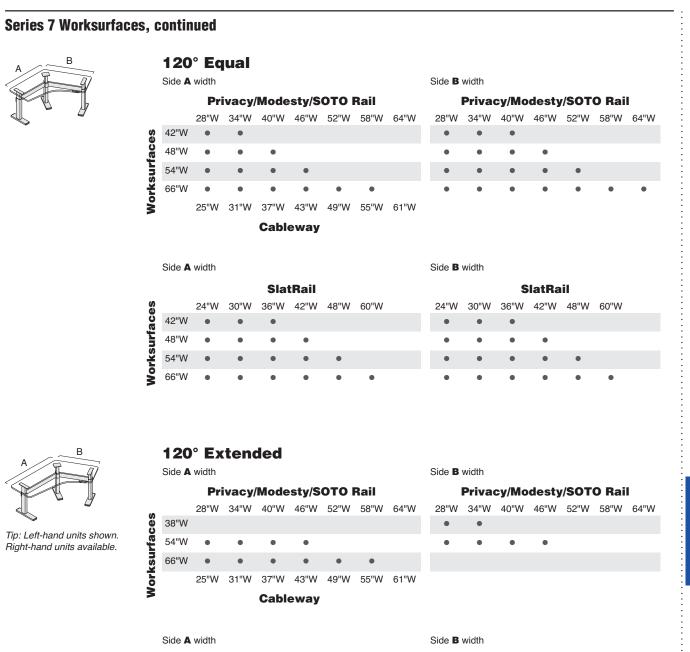

48"W

.

60"W

24"W

.

30"W

36"W

SlatRail

42"W

.

36"W

.

30"W

24"W

.

.

Worksurfaces

38"W 54"W

66"W


SlatRail


42"W

48"W 60"W

•

Series 3 Height-AdjusTable Worksurfaces

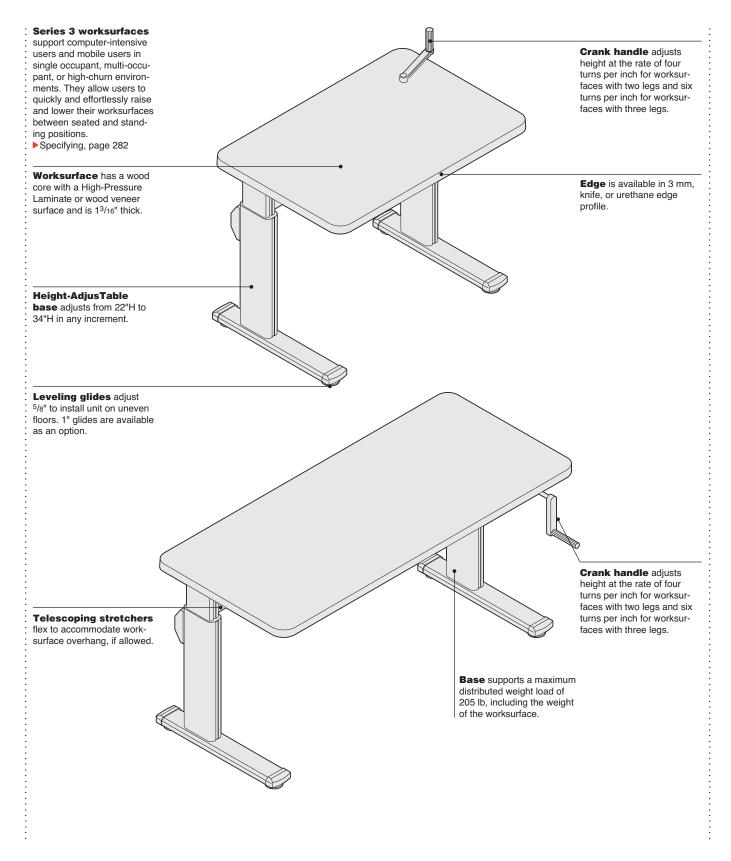


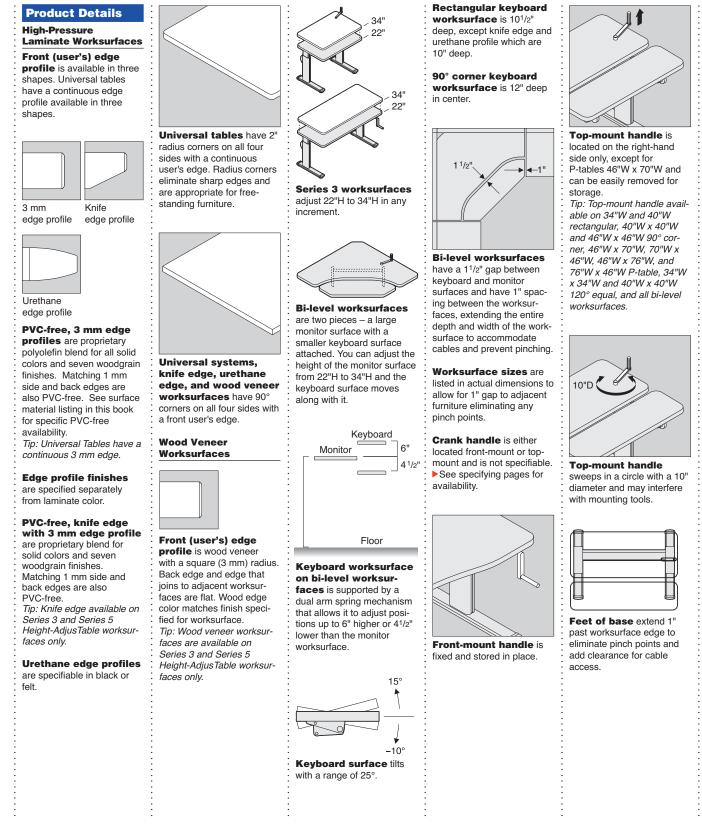



Worksurface overhang for pedestal storage varies by shape and size of worksurface. Worksurface widths over 58" allow for single or dual overhang. Use the Details online Adjus-Tables tool for specifics.

Telescoping stretchers collapse to accommodate worksurface overhang, if allowed. Pre-drilled holes are provided for both overhang (15") and non-overhang (11/4") instances; therefore, base placement is determined during assembly.

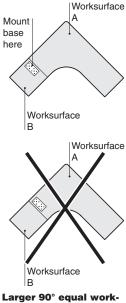

surfaces are manufactured in two pieces due to laminate sheet size. Flushmounted worksurface bracing is provided. Smallest section of the worksurface must not overhang lifting column.

34"W 120° equal worksurfaces have a 2-leg base. All other widths have a 3-leg base.

Surface Materials High-Pressure

Laminate Worksurface

- Laminate
 See Surface Materials Reference Manual.
- Open Line laminate
 (option)
- A program including non-Steelcase laminates which are suitable for use on
- Steelcase products. See Surface Materials Reference Manual.

3 mm or knife edge profile

Plastic

Urethane edge profile • 6000 Black

• 6278 Felt

Wood Veneer Worksurface

- Wood veneer (standard)
 Customiz stain (option)
- Full-Fill Finish (option)

Square 3 mm edge profile

 Wood veneer to match worksurface

Height-AdjusTable

- Base • 0835 Black • 4799 Platinum
- 4799 Platinum





Application Topics

Moving tables can collide

Do not install overhead stor-

desk accessories in the path

age, desk-height power, or

with other components.

of height-adjustable

worksurfaces.


- faces in privacy or below th worksurface for modesty. See Worktools
- *Compatibility Charts*, page 264, for help determining appropriate screen widths for each Series 3 worksurface size.

Cableways mount to

- worksurfaces to help manage cables at worksurface height for a clean aesthetic and can be used in combination with screens. > See Worktools
- Compatibility Charts, page 264, for help determining appropriate cableway widths for each Series 3 worksurface size.

SOTO Rail and SlatRail

mount to worksurfaces to support worktools, freeing up worksurface space. See Worktools Compatibility Charts, page 264, for help determining appropriate SOTO Rail and SlatRail widths for each Series 3 worksurface size.



27"H pedestal

Mobile pedestals higher than 20¹/2" will impede height range of worksurface. *Tip: Do not place storage* underneath handle.

Maximum distributed load-bearing weight including worksurface is 205 lb.

All assemblies meet or exceed ANSI/BIFMA standards.

Installation

Worksurfaces ship with pre-drilled holes for mount-ing bases.

Two-piece tops ship with flush mounted worksurface bracing.

Counterweights are

shipped for field installation to ensure stability when necessary.


Height-AdjusTable

base requires attachment to the worksurface.




Details Specification Guide

RD LD	
W	














Worksurface Shape	w	LD	RD	Style Number	Worksurfac Weight
•	0.41	0.0"	0.01		-
Rectangular-23"D	34" 40"	23" 23"	23" 23"	A3RQ342323	25 lb
				A3RQ402323	29 lb
	46"	23"	23"	A3RQ462323	33 lb
	52"	23"	23"	A3RQ522323	37 lb
	58"	23"	23"	A3RQ582323	42 lb
	64"	23"	23"	A3RQ642323	46 lb
	70"	23"	23"	A3RQ702323	50 lb
	76"	23"	23"	A3RQ762323	54 lb
Rectangular-29"D	34"	29"	29"	A3RQ342929	31 lb
	40"	29"	29"	A3RQ402929	36 lb
	46"	29"	29"	A3RQ462929	42 lb
	52"	29"	29"	A3RQ522929	47 lb
	58"	29"	29"	A3RQ582929	52 lb
	64"	29"	29"	A3RQ642929	58 lb
	70"	29"	29"	A3RQ702929	63 lb
	76"	29"	29"	A3RQ762929	68 lb
Rectangular Bi-Level	34"	29"	29"	A3RD342929	40 lb
	40"	29"	29"	A3RD402929	47 lb
	46"	29"	29"	A3RD462929	53 lb
Taper-Flat	58"	29"	23"	A3RT582923	46 lb
	64"	29"	23"	A3RT642923	50 lb
	70"	29"	23"	A3RT702923	55 lb
	76"	29"	23"	A3RT762923	60 lb
	58"	23"	29"	A3RT582329	46 lb
	64"	23"	29"	A3RT642329	40 lb 50 lb
	70"	23"	29 29"	A3RT702329	55 lb
0	76"	23"	29"	A3RT762329	60 lb
Concave	58"	29"	29"	A3CQ582929	50 lb
	64"	29"	29"	A3CQ642929	55 lb
	70"	29"	29"	A3CQ702929	60 lb
	76"	29"	29"	A3CQ762929	65 lb
Bullet–23"D	46"	23"	23"	A3BQ462323	31 lb
	52"	23"	23"	A3BQ522323	36 lb
	58"	23"	23"	A3BQ582323	40 lb
	64"	23"	23"	A3BQ642323	44 lb
	70"	23"	23"	A3BQ702323	48 lb
	76"	23"	23"	A3BQ762323	53 lb
	4.61	29"	29"	A3BQ462929	39 lb
Bullet–29"D	46"				
Bullet–29"D	40 52"	29"	29"	A3BQ522929	44 lb
Bullet–29"D	52"	29" 29"	29" 29"	A3BQ522929 A3BQ582929	44 lb 50 lb
Bullet–29"D	52" 58"		29"	A3BQ582929	50 lb
Bullet–29"D	52"	29"			

.

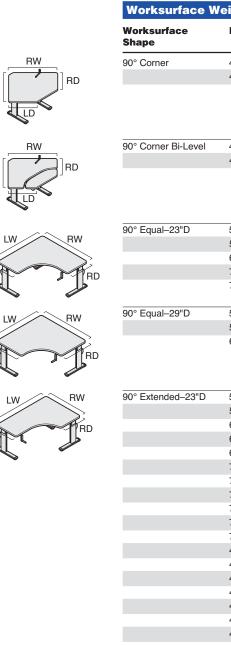

46" 23" 46" 23" A3LQ4	Worksurface Weight 0234023 45 lb 6234623 50 lb
46" 23" 46" 23" A3LQ4	
	6234623 50 lb
	0234023 55 lb
46" 23" 46" 23" A3LD4	6234623 67 lb
0° Equal-23"D 52" 23" 52" 23" A3LQ5	2235223 60 lb
58" 23" 58" 23" A3LQ5	8235823 68 lb
64" 23" 64" 23" A3LQ6	4236423 81 lb
70" 23" 70" 23" A3LQ7	0237023 89 lb
76" 23" 70" 23" A3LQ7	6237623 97 lb
0° Equal–29"D 52" 29" 52" 29" A3LQ5	2295229 70 lb
58" 29" 58" 29" A3LQ5	8295829 80 lb
64" 29" 64" 29" A3LQ6	4296429 98 lb
0° Extended–23"D 58" 23" 40" 23" A3LE5	8234023 56 lb
58" 23" 46" 23" A3LE5	8234623 60 lb
64" 23" 40" 23" A3LE64	4234023 60 lb
64" 23" 46" 23" A3LE64	4234623 64 lb
64" 23" 58" 23" A3LE64	4235823 73 lb
70" 23" 40" 23" A3LE70	0234023 64 lb
70" 23" 46" 23" A3LE70	0234623 69 lb
70" 23" 58" 23" A3LE70	0235823 77 lb
76" 23" 40" 23" A3LE7	6234023 69 lb
76" 23" 46" 23" A3LE7	6234623 73 lb
76" 23" 58" 23" A3LE7	6235823 81 lb
40" 23" 58" 23" A3LE4	0235823 56 lb
40" 23" 64" 23" A3LE4	0236423 60 lb
40" 23" 70" 23" A3LE4	0237023 64 lb
40" 23" 76" 23" A3LE4	0237623 69 lb
46" 23" 58" 23" A3LE4	6235823 60 lb
46" 23" 64" 23" A3LE4	6236423 64 lb
46" 23" 70" 23" A3LE4	6237023 69 lb
46" 23" 76" 23" A3LE4	6237623 73 lb
58" 23" 64" 23" A3LE56	8236423 73 lb
58" 23" 70" 23" A3LE5	8237023 77 lb
58" 23" 76" 23" A3LE5	8237623 81 lb

:

LW

LW

LD


ιr

.


LW RW	
	W
LD RD	RD
LW RW	

LW	RW
	TRD






Worksurface	LW	LD	RW	RD	Style	Worksurfa
Shape					Number	Weight
90° Extended–29"D	64"	29"	58"	29"	A3LE64295829	86 lb
	70"	29"	64"	29"	A3LE70296429	91 lb
	76"	29"	58"	29"	A3LE76295829	96 lb
	58"	29"	64"	29"	A3LE58296429	86 lb
	58"	29"	70"	29"	A3LE58297029	91 lb
	58"	29"	76"	29"	A3LE58297629	96 lb
90° Boot	64"	29"	58"	23"	A3LE64295823	75 lb
	70"	29"	40"	23"	A3LE70294023	67 lb
	70"	29"	46"	23"	A3LE70294623	71 lb
	70"	29"	58"	23"	A3LE70295823	80 lb
	76"	29"	40"	23"	A3LE76294023	72 lb
	76"	29"	46"	23"	A3LE76294623	76 lb
	76"	29"	58"	23"	A3LE76295823	84 lb
	40"	23"	70"	29"	A3LE40237029	67 lb
	40"	23"	76"	29"	A3LE40237629	72 lb
	46	23"	70"	29"	A3LE46237029	71 lb
	46	23"	76"	29"	A3LE46237629	76 lb
	58"	23"	64"	29"	A3LE58236429	75 lb
	58"	23"	76"	29"	A3LE58237629	84 lb
P-Table-23"D	64"	29"	58"	23"	A3PE64295823	78 lb
	70"	29"	46"	23"	A3PE70294623	74 lb
	70"	29"	58"	23"	A3PE70295823	83 lb
	76"	29"	46"	23"	A3PE76294623	80 lb
	76"	29"	58"	23"	A3PE76295823	88 lb
	46"	23"	70"	29"	A3PE46237029	74 lb
	46"	23"	76"	29"	A3PE46237629	80 lb
	58"	23"	64"	29"	A3PE58236429	78 lb
	58"	23"	70"	29"	A3PE58237029	83 lb
	58"	23"	76"	29"	A3PE58237629	88 lb
P-Table–29"D	64"	29"	58"	29"	A3PE64295829	83 lb
	70"	29"	58"	29"	A3PE70295829	88 lb
	76"	29"	58"	29"	A3PE76295829	94 lb
	58"	29"	64"	29"	A3PE58296429	83 lb
	58"	29"	70"	29"	A3PE58297029	88 lb
	58"	29"	76"	29"	A3PE58297629	94 lb
120° Equal	34"	23"	34"	23"	A3WQ34233423	45 lb
	40"	23"	40"	23"	A3WQ40234023	54 lb
	46"	23"	46"	23"	A3WQ46234623	63 lb
	52"	23"	52"	23"	A3WQ52235223	73 lb
	58"	23"	58"	23"	A3WQ58235823	82 lb
	64"	23"	64"	23"	A3WQ64236423	92 lb



Worksurface	Weight,	conti	nued			
Worksurface Shape	LW	LD	RW	RD	Style Number	Worksurface Weight
120° Extended	58"	23"	34"	23"	A3WE58233423	63 lb
	58"	23"	40"	23"	A3WE58234023	68 lb
	58"	23"	46"	23"	A3WE58234623	73 lb
	64"	23"	34"	23"	A3WE64233423	68 lb
	64"	23"	40"	23"	A3WE64234023	73 lb
	64"	23"	46"	23"	A3WE64234623	78 lb
	64"	23"	58"	23"	A3WE64235823	87 lb
	34"	23"	58"	23"	A3WE34235823	63 lb
	34"	23"	64"	23"	A3WE34236423	68 lb
	46"	23"	64"	23"	A3WE46236423	78 lb
	58"	23"	64"	23"	A3WE58236423	87 lb



Worksurface Shape	w	LD	RD	Style Number	Worksurface Weight
23"D Bubble Jetty	64"	29"	23"	A3JL642923	58 lb
	70"	29"	23"	A3JL702923	62 lb
	76"	29"	23"	A3JL762923	66 lb
	64"	23"	29"	A3JR642329	58 lb
	70"	23"	29"	A3JR702329	62 lb
	76"	23"	29"	A3JR762329	66 lb
29"D Bubble Jetty	64"	29"	29"	A3JL642929	62 lb
	70"	29"	29"	A3JL702929	67 lb
	76"	29"	29"	A3JL762929	73 lb
	64"	29"	29"	A3JR642929	62 lb
	70"	29"	29"	A3JR702929	67 lb
	76"	29"	29"	A3JR762929	73 lb

Series 3 Height-AdjusTable Worksurfaces

Series 3 Height-AdjusTable Worksurfaces

· Attachment hardware

High-Pressure Laminate or Wood Veneer

Need help?

Product details, page 274

RD LD
Tip: Series 3 Height-

AdjusTable base requires assembly and attachment to worksurface.

Tip: Worksurface ships with pre-drilled holes for mounting bases.

Tip: Crank handle location is not selectable. Crank handle is front or top mounted. See Worktools Compatibility Charts, page 264.

Tip: Maximum distributed load-bearing capacity is 205 lb per table including worksurface.

Tip: Mobile pedestals higher than 201/2"H will impede the lowest height range of worksurface. Do not place storage underneath handle.

Tip: Worksurface overhang for pedestal storage varies by shape and size. Use the Details online AdjusTable tool for specifics.

Premium Wood Pricing:

For Premium wood 2 or Premium wood 3 pricing, please refer to the electronic catalog or SmartTools.

Tip: For help determining privacy/modesty screen, cableway, SOTO rail, and SlatRail width compatibility. See Worktools Compatibility Charts, page 264.

Tip: For all edge profiles, add a suffix to the style number. (For example, A3RQ342323 becomes A3RQ342323V for wood with square edge profile.)



Canadian price factor. See page 1 for details.

Standard Includes Re	equired to Specify
 High-Pressure Laminate worksurface edges: prof Universal Tables: plastic 3 mm edge profile on all sides Universal Systems or knife edge worksurfaces: plastic 3 mm edge profile on front edge with matching 1 mm plastic Ourethane profile worksurfaces: urethane on front edge Urethane profile worksurfaces: urethane on front edge Wood worksurface edges: 3 Pla Wood worksurface edges: 3 Pla Wood worksurface edges: 4 Pai Worksurface corners: 083 Radius corners on Universal Tables, if selected 475 90° corners on Universal Systems, knife edge, urethane, 5 Op 	yle number with appropriate edge ofile suffix: Universal Tables Universal Systems Knife edge Urethane profile Wood veneer gh-Pressure Laminate or wood color mber for worksurface astic or urethane color number for pro- e edge on laminate worksurface, if lected sint color for base: 35 Black 99 Platinum otions, if selected (see below) see <i>Surface Materials</i> , page 442.

	Options	U.S. Price	Required to Specify
Surface	High-Pressure Lamin	ate worksurfaces	
Materials	 Open Line laminate 	+\$67	See Surface Materials Reference Manual.
	·	plus cost of laminate	
	Wood veneer worksu	rfaces	
	Premium wood 2	See information at left	Specify Premium wood 2 finish number.
	Premium wood 3	See information at left	Specify Premium wood 3 finish number.
	 Customiz stain 	No cost	Specify with Customiz stain.
			See Surface Materials Reference Manual.
	Full-fill finish	Prices at right	Specify full-fill finish number.
Glides	• 1" adjustable glides	+\$28	Specify with 1" glides.
Related	 Slatwall, SlatRail, and free 	estanding worktools	► Page 32
Products	 SOTO rail/shelves and we 	orktools	▶ Page 49
	 SOTO II worktools 		► Page 60
	 Flat panel arms 		▶ Page 190
	 Privacy/modesty screens 	and cableways	▶ Page 352
	Cable and power manage	2	▶ Page 358
	1 0		-

Tip: Only single and dual flat panel monitor arm applications are permitted for use with 2-leg height adjustable tables.

Specification Information U.S. Base Prices • Style · Universal · Universal · Knife Option Dimensions Urethane ·Wood W LD RD Number Tables Systems Edge Profile Veneer (Add \$ to Base Price) Full-Fill Finish

Suffix Y

Suffix K

Suffix S

Suffix V


Suffix U

Rectangular Worksurfaces

23"[)									
34"	23"	23"	A3RQ342323	\$1198	\$1141	\$1314	\$1545	\$1662	+\$27	
40"	23"	23"	A3RQ402323	\$1235	\$1176	\$1355	\$1589	\$1706	+\$46	
46"	23"	23"	A3RQ462323	\$1274	\$1214	\$1392	\$1631	\$1751	+\$46	
52"	23"	23"	A3RQ522323	\$1311	\$1250	\$1431	\$1675	\$1797	+\$46	
58"	23"	23"	A3RQ582323	\$1353	\$1290	\$1474	\$1721	\$1844	+\$46	
64"	23"	23"	A3RQ642323	\$1392	\$1330	\$1517	\$1767	\$1893	+\$67	
70"	23"	23"	A3RQ702323	\$1432	\$1369	\$1561	\$1814	\$1941	+\$67	
76"	23"	23"	A3RQ762323	\$1477	\$1414	\$1606	\$1866	\$1991	+\$67	

29"D									
34"	29"	29"	A3RQ342929	\$1401	\$1340	\$1523	\$1762	\$1882	+\$46
40"	29"	29"	A3RQ402929	\$1442	\$1381	\$1566	\$1810	\$1932	+\$46
46"	29"	29"	A3RQ462929	\$1487	\$1424	\$1611	\$1858	\$1983	+\$46
52"	29"	29"	A3RQ522929	\$1532	\$1469	\$1658	\$1910	\$2036	+\$67
58"	29"	29"	A3RQ582929	\$1578	\$1513	\$1706	\$1962	\$2090	+\$67
64"	29"	29"	A3RQ642929	\$1626	\$1561	\$1755	\$2016	\$2145	+\$67
70"	29"	29"	A3RQ702929	\$1675	\$1609	\$1807	\$2070	\$2201	+\$67
76"	29"	29"	A3RQ762929	\$1727	\$1659	\$1858	\$2127	\$2261	+\$67
:			1		:	:	:	:	:

Rectangular Bi-Level Worksurfaces




Specification Information, continued on next page

Tip: All bi-level worksurfaces have a top mount handle

have a top mount handle located on right-hand side of worksurface.

RD

RD LD LD LD LD RD RD RD



gular worksurfaces have a top mount handle located on right-hand side of worksurface. 46"W to 70"W have a front mount handle.


N RD


Tip: Taper-flat worksurfaces do not allow for worksurface overhang.

Tip: Taper-flat worksurfaces utilize a 29"D base causing the foot to extend past the worksurface on the 23"D side.

Tip: Only single and dual flat panel monitor arm applications are permitted for use with 2-leg height adjustable tables.







Tip: Concave worksurfaces do not allow for worksurface overhang.

Tip: Center of concave worksurface is 25¹/5"D.

Dimensi W LD	ions RD	• Style Number	• Universal Tables	• Universal Systems		• Urethane Profile	•Wood Veneer	• Option (Add \$ to • Base Price)
· · · ·			•	•	•			Full-Fill Finish
· · · · ·			Suffix U	Suffix Y	Suffix K	Suffix S	Suffix V	
Taner-F	i lat V	Vorksurfaces			•			·
Left-Han								
58" 29"	23"	A3RT582923	\$1578	\$1513	\$1706	\$1962	\$2090	+\$67
64" 29"	23"	A3RT642923	\$1626	\$1561	\$1755	\$2016	\$2145	+\$67
70" 29"	23"	A3RT702923	\$1675	\$1609	\$1807	\$2070	\$2201	+\$67
76" 29"	23"	A3RT762923	\$1727	\$1659	\$1858	\$2127	\$2261	+\$67
Right-Ha	nd							
58" 23"	29"	A3RT582329	\$1578	\$1513	\$1706	\$1962	\$2090	+\$67
64" 23"	29"	A3RT642329	\$1626	\$1561	\$1755	\$2016	\$2145	+\$67
70" 23"	29"	A3RT702329	\$1675	\$1609	\$1807	\$2070	\$2201	+\$67
76" 23" :	29"	A3RT762329	\$1727 :	\$1659 :	\$1858 :	\$2127 :	\$2261 :	+\$67 :
Concav	e Wo	rksurfaces						
58" 29"	29"	A3CQ582929	\$1578	\$1513	\$1706	\$1962	\$2090	+\$67
64" 29"	29"	A3CQ642929	\$1626	\$1561	\$1755	\$2016	\$2145	+\$67
70" 29"	29"	A3CQ702929	\$1675	\$1609	\$1807	\$2070	\$2201	+\$67
76" 29"	29"	A3CQ762929	\$1727	\$1659	\$1858	\$2127	\$2261	+\$67

Specification Information, continued from previous page

U.S. Base Prices

Specification Information



Tip: Bullet worksurfaces are not recommended for use with pedestals.

Tip: Bullet worksurfaces with knife or urethane profile edges should not be specified with products that require a C-clamp.

Tip: Only single and dual flat panel monitor arm applications are permitted for use with 2-leg height adjustable tables.





76" 23" 23"

52" 29" 29"

58" 29" 29"

64" 29" 29"

70" 29" 29"

76" 29" 29"

29"D 46" 29" 29"

Sp	ecif	icatio	on Information	ı					
				U.S. Base	Prices				
						\square			
• Dii W	nens LD	ions RD	• Style Number	Universal Tables	Universal Systems	• Knife Edge	• Urethane Profile	• Wood Veneer	• Option (Add \$ to Base Price)
- - - - -				•	•	•	· · · ·	•	Full-Fill Finish
- - - -				•	•		· · ·		
				Suffix U	Suffix Y	Suffix K	Suffix S	Suffix V	•
Bu	llet	Work	surfaces						
23"	D								
46"	23"	23"	A3BQ462323	\$1274	\$1214	\$1392	\$1631	\$1751	+\$46
52"	23"	23"	A3BQ522323	\$1311	\$1250	\$1431	\$1675	\$1797	+\$46
58"	23"	23"	A3BQ582323	\$1353	\$1290	\$1474	\$1721	\$1844	+\$46
64"	23"	23"	A3BQ642323	\$1392	\$1330	\$1517	\$1767	\$1893	+\$67
70"	23"	23"	A3BQ702323	\$1432	\$1369	\$1561	\$1814	\$1941	+\$67

\$1414

\$1424

\$1469

\$1513

\$1561

\$1609

\$1659

\$1606

\$1611

\$1658

\$1706

\$1755

\$1807

\$1858

\$1866

\$1858

\$1910

\$1962

\$2016

\$2070

\$2127

\$1991

\$1983

\$2036

\$2090

\$2145

\$2201

\$2261

+\$67

+\$46

+\$67

+\$67

+\$67

+\$67

+\$67

Specification Information, continued on next page

A3BQ762929 \$1727

A3BQ762323 \$1477

\$1487

\$1532

\$1578

\$1626

\$1675

A3BQ462929

A3BQ522929

A3BQ582929

A3BQ642929


A3BQ702929

Specification Information, continued from previous page





Tip: Base only for 90° corner worksurfaces is not available.


Tip: Only single and dual flat panel monitor arm applications are permitted for use with 2-leg height adjustable tables.



Tip: 40"W x 40"W and 46"W x 46"W 90° worksurfaces have a top mount handle located on right-hand side of worksurface.







Tip: 64"W and 70"W 90° equal worksurfaces ship in two pieces.

Specification Information, continued from previous page

		U.S. Base	Prices				
•Dimensions LW LD RW RD	• Style Number	· Universal Tables	Universal Systems		Urethane Profile	Veneer	• Option (Add \$ to Base Price)
· · · ·	· · · ·	· · · ·					Full-Fill Finish
:		Suffix U	Suffix Y	Suffix K	Suffix S	Suffix V	•

40"	23"	40"	23"	A3LQ40234023	\$1463	\$1373	\$1640	\$1993	\$2171	+\$ 46
46"	23"	46"	23"	A3LQ46234623	\$1507	\$1418	\$1686	\$2046	\$2227	+\$ 67
						:	:	:	:	:

90° Corner Bi-Level Worksurfaces

40"	23"	40"	23"	A3LD40234023	\$2258	\$2151	\$2476	\$2908	\$3126	+\$ 46
46"	23"	46"	23"	A3LD46234623	\$2303	\$2192	\$2522	\$2961	\$3181	+\$ 67
				•						

90° Equal Worksurfaces

23 "l	23"D									
52"	23"	52"	23"	A3LQ52235223	\$2137	\$2040	\$2332	\$2724	\$2919	+\$ 67
58"	23"	58"	23"	A3LQ58235823	\$2270	\$2168	\$2471	\$2873	\$3074	+\$ 67
64"	23"	64"	23"	A3LQ64236423	\$2409	\$2305	\$2617	\$3032	\$3240	+\$ 94
70"	23"	70"	23"	A3LQ70237023	\$2557	\$2449	\$2771	\$3200	\$3412	+\$ 94
76"	23"	76"	23"	A3LQ76237623	\$2713	\$2604	\$2933	\$3376	\$3596	+\$121
29"I	D									
52"	29"	52"	29"	A3LQ52295229	\$2270	\$2168	\$2471	\$2873	\$3074	+\$ 67
58"	29"	58"	29"	A3LQ58295829	\$2409	\$2305	\$2617	\$3032	\$3240	+\$ 94
64"	29"	64"	29"	A3LQ64296429	\$2557	\$2449	\$2771	\$3200	\$3412	+\$ 94
•					•	•	•	•		



Specification	Information						
		U.S. Base	Prices				
				\Box			
Dimensions LW LD RW RD	Style	• Universal Tables	·Universal Systems		· Urethane Profile		• Option (Add \$ to
	Number	iables	: :	Euge	Frome	: :	Base Price)
		•	· · ·		•	:	: Full-Fill
	•	Suffix U	Suffix Y	Suffix K	Suffix S	Suffix V	Finish

Specification Information, continued from previous page

90° Extended Worksurfaces

23"D, Left-Hand



58"	23"	40"	23"	A3LE58234023	\$2075	\$1978	\$2269	\$2653	\$2845	+\$67
58"	23"	46"	23"	A3LE58234623	\$2137	\$2040	\$2332	\$2724	\$2919	+\$67
64"	23"	40"	23"	A3LE64234023	\$2137	\$2040	\$2332	\$2724	\$2919	+\$67
64"	23"	46"	23"	A3LE64234623	\$2201	\$2102	\$2400	\$2796	\$2995	+\$67
64"	23"	58"	23"	A3LE64235823	\$2338	\$2235	\$2542	\$2952	\$3157	+\$67
70"	23"	40"	23"	A3LE70234023	\$2201	\$2102	\$2400	\$2796	\$2995	+\$67
70"	23"	46"	23"	A3LE70234623	\$2270	\$2168	\$2471	\$2873	\$3074	+\$67
70"	23"	58"	23"	A3LE70235823	\$2409	\$2305	\$2617	\$3032	\$3240	+\$94
76"	23"	40"	23"	A3LE76234023	\$2270	\$2168	\$2471	\$2873	\$3074	+\$67
76"	23"	46"	23"	A3LE76234623	\$2338	\$2235	\$2542	\$2952	\$3157	+\$67
76"	23"	58"	23"	A3LE76235823	\$2481	\$2375	\$2692	\$3114	\$3324	+\$94



23"D, Right-Hand										
40"	23"	58"	23"	A3LE40235823	\$2075	\$1978	\$2269	\$2653	\$2845	+\$67
40"	23"	64"	23"	A3LE40236423	\$2137	\$2040	\$2332	\$2724	\$2919	+\$67
40"	23"	70"	23"	A3LE40237023	\$2201	\$2102	\$2400	\$2796	\$2995	+\$67
40"	23"	76"	23"	A3LE40237623	\$2270	\$2168	\$2471	\$2873	\$3074	+\$67
46"	23"	58"	23"	A3LE46235823	\$2137	\$2040	\$2332	\$2724	\$2919	+\$67
46"	23"	64"	23"	A3LE46236423	\$2201	\$2102	\$2400	\$2796	\$2995	+\$67
46"	23"	70"	23"	A3LE46237023	\$2270	\$2168	\$2471	\$2873	\$3074	+\$67
46"	23"	76"	23"	A3LE46237623	\$2338	\$2235	\$2542	\$2952	\$3157	+\$67
58"	23"	64"	23"	A3LE58236423	\$2338	\$2235	\$2542	\$2952	\$3157	+\$67
58"	23"	70"	23"	A3LE58237023	\$2409	\$2305	\$2617	\$3032	\$3240	+\$94
58"	23"	76"	23"	A3LE58237623	\$2481	\$2375	\$2692	\$3114	\$3324	+\$94
-				•	•	•	•	•	•	•




profile.)

LW

IV

IW

LW

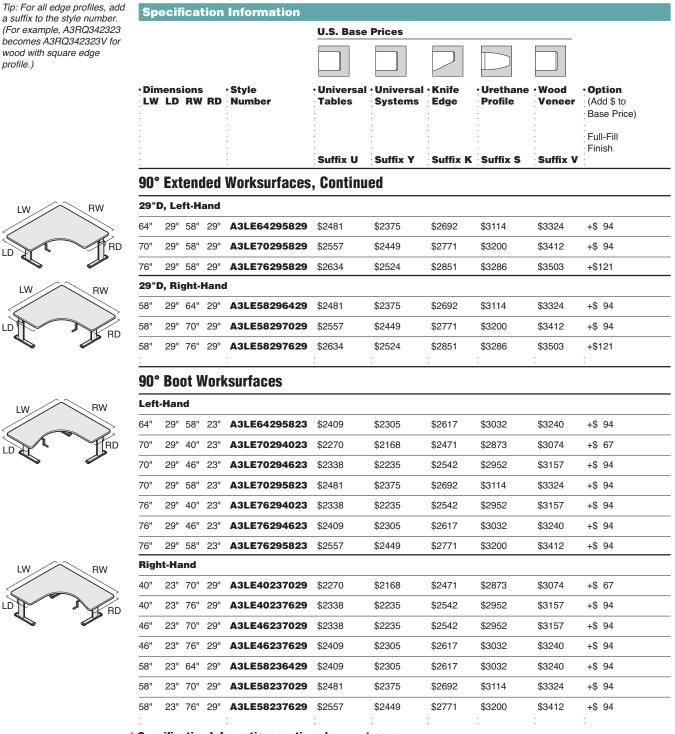


Specification Information, continued from previous page




Tip: P-Table worksurfaces provide an alternative to 90° extended corner worksurfaces.

Tip: 46"W side of P-Table worksurface has a top mount handle. Handle is located either right- or left-hand side depending on configuration.




Tip: P-Table worksurface overhang allows clearance for guest seating facing the user.



Tip: P-Table worksurfaces are not recommended for use with pedestals.





29"D, Right-Hand										
58"	29"	64"	29"	A3PE58296429	\$2481	\$2375	\$2692	\$3114	\$3324	+\$ 94
58"	29"	70"	29"	A3PE58297029	\$2557	\$2449	\$2771	\$3200	\$3412	+\$ 94
58"	29"	76"	29"	A3PE58297629	\$2634	\$2524	\$2851	\$3286	\$3503	+\$121

Specification Information, continued on next page



Specification Information, continued from previous page

		U.S. Base	Prices				
Dimensions LW LD RW RD	• Style Number	• Universal Tables	Universal Systems		Urethane Profile	Wood Veneer	• Option (Add \$ to Base Price)
	· · · ·	Suffix U	Suffix Y	Suffix K		Suffix V	Full-Fill Finish


P-Table Worksurfaces

23"D, Left-Hand										
64"	29"	58"	23"	A3PE64295823	\$2409	\$2305	\$2617	\$3032	\$3240	+\$ 94
70"	29"	46"	23"	A3PE70294623	\$2338	\$2235	\$2542	\$2952	\$3157	+\$ 94
70"	29"	58"	23"	A3PE70295823	\$2481	\$2375	\$2692	\$3114	\$3324	+\$ 94
76"	29"	46"	23"	A3PE76294623	\$2409	\$2305	\$2617	\$3032	\$3240	+\$ 94
76"	29"	58"	23"	A3PE76295823	\$2557	\$2449	\$2771	\$3200	\$3412	+\$ 94

23"	23"D, Right-Hand										
46"	23"	70"	29"	A3PE46237029	\$2338	\$2235	\$2542	\$2952	\$3157	+\$ 94	
46"	23"	76"	29"	A3PE46237629	\$2409	\$2305	\$2617	\$3032	\$3240	+\$ 94	
58"	23"	64"	29"	A3PE58236429	\$2409	\$2305	\$2617	\$3032	\$3240	+\$ 94	
58"	23"	70"	29"	A3PE58237029	\$2481	\$2375	\$2692	\$3114	\$3324	+\$ 94	
58"	23"	76"	29"	A3PE58237629	\$2557	\$2449	\$2771	\$3200	\$3412	+\$ 94	

29"D, Left-Hand										
64"	29"	58"	29"	A3PE64295829	\$2481	\$2375	\$2692	\$3114	\$3324	+\$ 94
70"	29"	58"	29"	A3PE70295829	\$2557	\$2449	\$2771	\$3200	\$3412	+\$ 94
76"	29"	58"	29"	A3PE76295829	\$2634	\$2524	\$2851	\$3286	\$3503	+\$121

	φ200 I	φ <u></u> 2021	Ψ <u>2</u> 001	φ0200	φοσοσ	
9	\$2481	\$2375	\$2692	\$3114	\$3324	+\$ 94
9	\$2557	\$2449	\$2771	\$3200	\$3412	+\$ 94
9	\$2634	\$2524	\$2851	\$3286	\$3503	+\$121

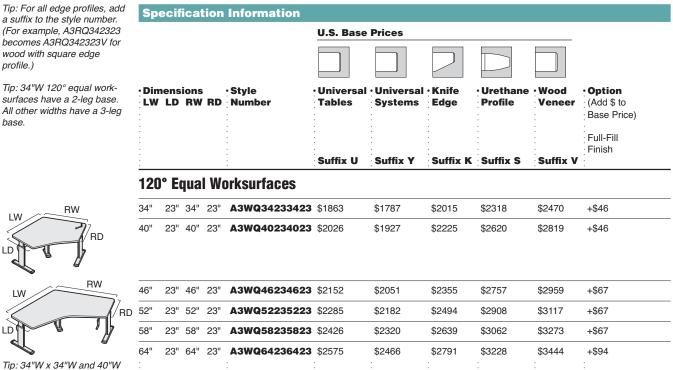

Specification Information, continued from previous page

120° Extended Worksurfaces

LW	7
	ď

x 40"W 120° worksurfaces have a top mount handle located on right-hand side of


worksurface.

profile.)

base.

LW

IΓ



For Canadian Pricing Multiply U.S. Price by the Canadian price factor. See page 1 for details.


Left	-Han	d								
58"	23"	34"	23"	A3WE58233423	\$2152	\$2051	\$2355	\$2757	\$2959	+\$67
58"	23"	40"	23"	A3WE58234023	\$2218	\$2114	\$2420	\$2832	\$3037	+\$67
58"	23"	46"	23"	A3WE58234623	\$2285	\$2182	\$2494	\$2908	\$3117	+\$67
64"	23"	34"	23"	A3WE64233423	\$2218	\$2114	\$2420	\$2832	\$3037	+\$67
64"	23"	40"	23"	A3WE64234023	\$2285	\$2182	\$2494	\$2908	\$3117	+\$67
64"	23"	46"	23"	A3WE64234623	\$2355	\$2248	\$2566	\$2988	\$3200	+\$67
64"	23"	58"	23"	A3WE64235823	\$2500	\$2393	\$2715	\$3143	\$3356	+\$67
Rigi	ht-Ha	nd								
34"	23"	58"	23"	A3WE34235823	\$2152	\$2051	\$2355	\$2757	\$2959	+\$67
34"	23"	64"	23"	A3WE34236423	\$2218	\$2114	\$2420	\$2832	\$3037	+\$67
40"	23"	58"	23"	A3WE40235823	\$2218	\$2114	\$2420	\$2832	\$3037	+\$67
40"	23"	64"	23"	A3WE40236423	\$2285	\$2182	\$2494	\$2908	\$3117	+\$67
46"	23"	58"	23"	A3WE46235823	\$2285	\$2182	\$2494	\$2908	\$3117	+\$67
46"	23"	64"	23"	A3WE46236423	\$2355	\$2248	\$2566	\$2988	\$3200	+\$67
58"	23"	64"	23"	A3WE58236423	\$2500	\$2393	\$2715	\$3143	\$3356	+\$67
:				:		:	:	:		:


Specification Information, continued on next page


290


Tip: Bubble jetty worksurface overhang allows clearance for guest seating facing the user.











Tip: Bubble jetty worksurfaces are not recommended for use with pedestals.

Tip: Bubble jetty worksurfaces with knife or urethane profile edges should not be specified with products that require a C-clamp on the rounded side of worksurface.



Details Specification Guide

Specification Information, continued from previous page

Suffix U Suffix Y Suffix K Suffix S Suffix V **Bubble Jetty Worksurfaces** 23"D, Left-Hand 64" 29" 23" A3JL642923 \$2439 \$2330 \$2655 \$3091 \$3307 +\$67 70" 29" 23" \$2512 \$2403 \$2732 \$3173 \$3392 A3JL702923 +\$67 76" 29" 23" A3JL762923 \$2587 \$2477 \$2813 \$3260 \$3483 +\$67

23"D, Right-Hand									
64"	29"	29"	A3JR642329	\$2439	\$2330	\$2655	\$3091	\$3307	+\$67
70"	23"	29"	A3JR702329	\$2512	\$2403	\$2732	\$3173	\$3392	+\$67
76"	23"	23"	A3JR762329	\$2587	\$2477	\$2813	\$3260	\$3483	+\$67

29"D, Left-Hand										
64"	29"	29"	A3JL642929	\$2512	\$2403	\$2732	\$3173	\$3392	+\$67	
70"	29"	29"	A3JL702929	\$2587	\$2477	\$2813	\$3260	\$3483	+\$67	
76"	29"	29"	A3JL762929	\$2667	\$2554	\$2895	\$3347	\$3575	+\$67	

29"D, Right-Hand									
64"	29"	29"	A3JR642929	\$2512	\$2403	\$2732	\$3173	\$3392	+\$67
70"	29"	29"	A3JR702929	\$2587	\$2477	\$2813	\$3260	\$3483	+\$67
76"	29"	29"	A3JR762929	\$2667	\$2554	\$2895	\$3347	\$3575	+\$67

Series 3 Bases

Tip: Maximum distributed load-bearing capacity is 220 lb per table including worksurface. ►Need help?

page 274

Product details,

Tip: Mobile pedestals higher than 20¹/2" will impede lowest height range of worksurface. Do not place storage underneath handle.

Tip: Worksurface overhang for use with pedestals is not recommended for taper-flat and concave worksurfaces.

Tip: Attachment hardware is intended for worksurfaces 1³/₁₆" thick only.

Tip: For overhang allowance for use with pedestals, use Details online AdjusTable tool for specifics.

Tip: 29"D bases are recommended for use with taper-flat and concave worksurfaces.

Tip: Only single and dual flat panel monitor arm applications are permitted for use with 2-leg height adjustable tables.

Tip: Use the Details online AdjustTable tool for specifics on bullet worksurfaces.

W A



Tip: Bases are not recommended for Series 9000 worksurfaces with heightadjustable channel braces attached to underside of worksurface.



Standard Includes

- · Height-AdjusTable base with crank: paint
- Front crank handle
- Telescoping stretchers
 ⁵/8" adjustable glides
- Attachment hardware

Required to Specify

- 1 Style number
- 2 Paint color number for base: 0835 Black
- 4799 Platinum
- 3 Handedness of 90° base, if selected
- 4 Options, if selected (see below)
- See Surface Materials, page 442.

	Options	U.S. Price	Required to Specify
Glides	 1" adjustable glides 	+\$28	Specify with 1" glides.
Handedness (For use with 90°	 Right-hand, 90° extended bases 	No cost	Specify with right-hand configuration.
worksurfaces)	 Left-hand, 90° extended bases 	No cost	Specify with left-hand configuration.

Specification	Specification Information									
 Worksurface 	• Style	۰U.S.								
Dimensions	Number	Base								
W D		Price								


Rectangular Bases

23"D			
46"–52"	23"	A3RQ46T05223B	\$1180
58"	23"	A3RQ5823B	\$1191
64"–76"	23"	A3RQ64T07623B	\$1205
29"D			
46"–52"	29"	A3RQ46TO5229B	\$1190
58"	29"	A3RQ5829B	\$1204
64"–76"	29"	A3RQ64T07629B	\$1215
			•


Specification Information, continued on next page

Specification Information, continued from previous page


Spee	cificati	on Info	rmatio	n		
Dime	surface nsions			• Style Number	·U.S. Base	
: LW	LD	RW	RD		Price	



Tip: Right-hand sizes listed; applicable for left-hand worksurfaces.



Tip: When using 90° base, the right- or left-hand configuration must be specified.



Tip: Right-hand sizes listed; applicable for left-hand worksurfaces.

90°	Equal	Bases
-----	-------	-------

50 E	quui bu	505			
52"	23"–29"	52"	23"–29"	A3LQ52X52B	\$1853
58"	23"–29"	58"	23"–29"	A3LQ58X58B	\$1858
64"–76	" 23"–29"	64"–76"	23"–29"	A3LQ64T076B	\$1877
:					

90° Extended Bases

40"	23"–29"	58"	23"–29"	A3LE40X58B	\$1843
40"	23"–29"	64"–76"	23"–29"	A3LE40X64T076B	\$1855
46"	23"–29"	58"	23"–29"	A3LE46X58B	\$1853
46"	23"–29"	64"–76"	23"–29"	A3LE46X64T076B	\$1858
58"	23"–29"	64"–76"	23"–29"	A3LE58X64T076B	\$1867
:					

120° Equal Bases


46"–58"	23"	46"–58"	23"	A3WQ46TO58B	\$1848
64"	23"	64"	23"	A3WQ64X64B	\$1872


120° Extended Bases

34"	23"	58"	23"	A3WE34X58B	\$1838
34"	23"	64"	23"	A3WE34X64B	\$1843
40"	23"	58"	23"	A3WE40X58B	\$1843
40"	23"	64"	23"	A3WE40X64B	\$1848
46"–58"	23"	46"–58"	23"	A3WQ46TO58B	\$1848
46"	23"	64"	23"	A3WE46X64B	\$1853
58"	23"	64"	23"	A3WE58X64B	\$1867



Airtouch Height-AdjusTable Worksurfaces

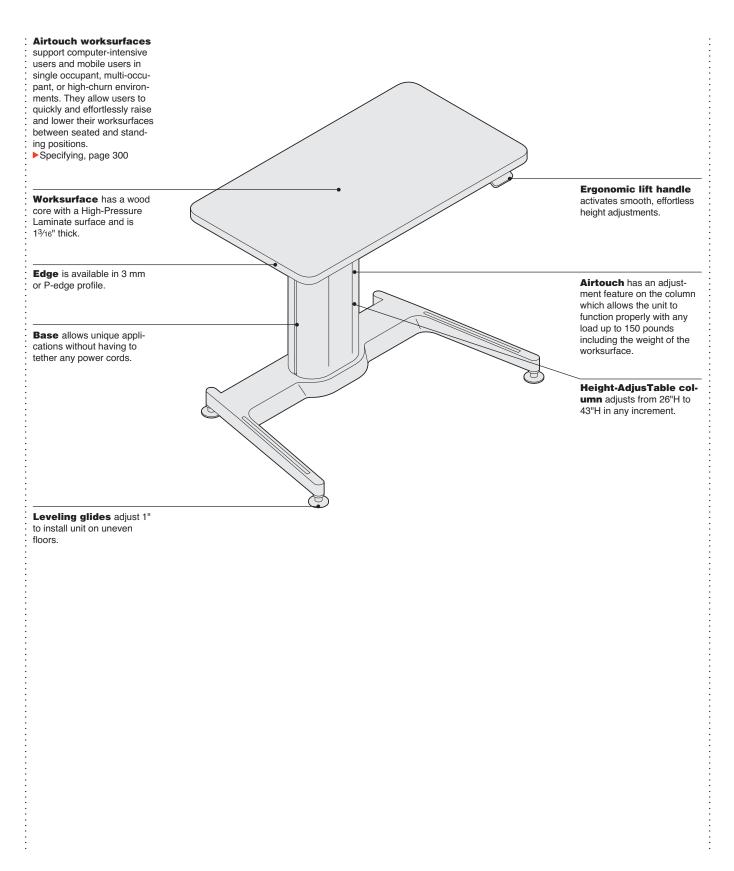

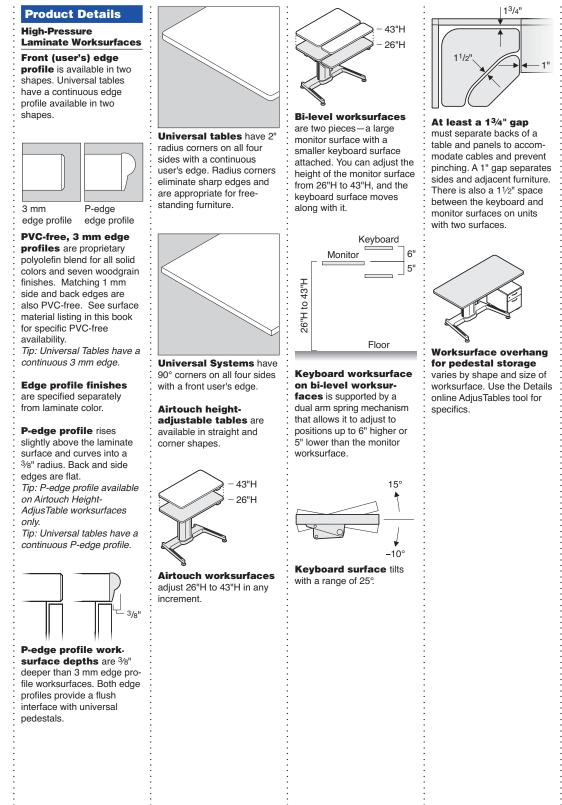

Surface Materials

High-Pressure Laminate Tables

Laminate

See Surface Materials

- Reference Manual Open Line laminate
- (option) A program including non-Steelcase laminates which are suitable for use on
- Steelcase products. See Surface Materials
- Reference Manual

3 mm or P-edge Plastic

Height-AdjusTable

- base 4799 Platinum
- 7207 Black
- 7246 Midnight

Height-AdjusTable column

· 4799 Platinum paint

Airtouch Height-AdjusTable Worksurfaces, continued 295

Details Specification Guide

Application Topics

Moving tables can collide with other components. Do not install overhead storage, desk-height power, or desk accessories in the path of height-adjustable worksurfaces.

Airtouch is designed to support up to 150 pounds including the worksurface. An adjustable feature on the column allows the amount of lift assist to be set for various cargo loads.




The gauge located near the top of the column shows the amount of lift assist in use. The amount of lift assist can be dialed up for heavier loads and dialed down for lighter loads. If the unit is not moving smoothly, the lift assist mechanism needs to be adjusted. For example, if the top raises too fast, dial the lift assist down. If the top is difficult to raise, dial the lift assist up.

Typical worktool weights are:

Weights are: Laptop 5–8 lb Small flat screen 10–16 lb Monitor arm 10–14 lb Desk lamp 5–10 lb Keyboard 2–3 lb Inch of paper 2¹/₂ lb Desk phone 3–5 lb

Worksurface travels at

the speed designated by the user. Users can adjust the table from seated to standing in one natural motion (approximately 1 second).



Screens mount to worksurfaces in privacy or below the worksurface for modesty. See *Worktools*

Compatibility Charts, page 264, for help determining appropriate screen widths for each Airtouch worksurface size.

Cableways mount to

281/4"D worksurfaces only to help manage cables at worksurface height for a clean aesthetic and can be used in combination with screens. See Worktools

Compatibility Charts, page 264, for help determining appropriate cableway widths for each Airtouch worksurface size.

SOTO Rail and SlatRail

mount to worksurfaces to support worktools, freeing up worksurface space. See Worktools Compatibility Charts, page 264, for help determining appropriate SOTO rail and SlatRail widths for each Airtouch worksurface size.



Mobile pedestals higher than 24¹/2" will impede the lower height range of worksurface.

range of worksurface. Tip: Do not place storage underneath paddle.

Worksurface weight

plates may be necessary to order if there is not enough weight on the worksurface. Applications using the smallest width worksurface without additional worktools (i.e. touchdown spaces) will require these counterweights (946900053SR).

All assemblies meet or exceed ANSI/BIFMA standards.

Installation

Worksurfaces ship with pre-drilled holes for mounting bases.

Airtouch column

requires attachment to the base and worksurface.

Worksurface Weight

28 lb

32 lb 41 lb

35 lb 41 lb 51 lb


57 lb 64 lb

	Worksurface Weight									
	Worksurface Shape	w	LD	RD	Style Number					
	Universal Tables									
D	Rectangular-221/4"D	40"	22 ¹ /4"	22 ¹ /4"	BAPSS2442					
>		46"	22 ¹ /4"	221/4"	BAPSS2448					
		58"	22 ¹ /4"	22 ¹ /4"	BAPSS2460					
3										
RD	Rectangular-281/4"D	40"	281/4"	28 ¹ /4"	BAPSS3042					
		46"	28 ¹ /4"	28 ¹ /4"	BAPSS3048					
1		58"	28 ¹ /4"	281/4"	BAPSS3060					
•										
RD	Rectangular Bi-Level	40"	341/4"	341/4"	BAPDS3642					
\geq		46"	341/4"	341/4"	BAPDS3648					

Worksurface Shape	LW	LD	RW	RD	Style Number	Worksurface Weight
90° Corner	39 ¹ /4"	221/4"	39 ¹ /4"	22 ¹ /4"	BAPSC2442	42 lb
	45 ¹ /4"	221/4"	45 ¹ /4"	22 ¹ /4"	BAPSC2448	54 lb


90° Corner Bi-Level	39 ¹ /4"	22 ¹ /4"	39 ¹ /4"	22 ¹ /4"	BAPDC2442	54 lb	
	45 ¹ /4"	221/4"	45 ¹ /4"	221/4"	BAPDC2448	66 lb	

120° Equal	34"	221/4"	34"	22 ¹ /4"	BAPB2436	51 lb



••••••









Details	Specification	Guide
Dotano	opeointoution	auluo

Airtouch Height-AdjusTable Worksurfaces, continued 297








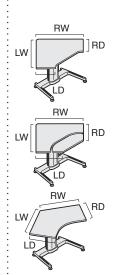





Worksurface Shape	W	LD	RD	Style Number	Worksurface Weight
For Use with Universal Systems					
Retangular–22 ¹ /4"D	40"	22 ¹ /4"	22 ¹ /4"	UAPSS2442	28 lb
	46"	22 ¹ /4"	221/4"	UAPSS2448	32 lb
	58"	221/4"	22 ¹ /4"	UAPSS2460	41 lb
Rectangular-28/4"D	40"	281/4"	28 ¹ /4"	UAPSS3042	35 lb
	46"	281/4"	28 ¹ /4"	UAPSS3048	41 lb
	58"	28 ¹ /4"	28 ¹ /4"	UAPSS3060	51 lb
Rectangular Bi-Level	40"	341/4"	341/4"	UAPDS3642	57 lb
	46"	34 ¹ /4"	341/4"	UAPSS3648	64 lb

Worksurface Shape	LW	LD	RW	RD	Style Number	Worksurface Weight
90° Corner	39 ¹ /4"	16 ¹ /4"	391/4"	16 ¹ /4"	UAPSC1842	38 lb
	39 ¹ /4"	221/4"	391/4"	221/4"	UAPSC2442	42 lb
	451/4"	22 ¹ /4"	45 ¹ /4"	22 ¹ /4"	UAPSC2448	54 lb
90° Corner Bi-Level	39 ¹ /4"	22 ¹ /4"	39 ¹ /4"	22 ¹ /4"	UAPDC2442	54 lb
	45 ¹ /4"	221/4"	45 ¹ /4"	221/4"	UAPDC2448	66 lb
120° Equal	34"	221/4"	34"	221/4"	UAPB2436	51 lb
Worksurface Shape	w	LD		RD	Style Number	Worksurface Weight
For Use with Series 9000						
Rectangular	43"	2225/32	ı	2225/32"	9UAPSS2545	30 lb
	43"	27 ²⁵ /32	1	27 ²⁵ /32"	9UAPSS3045	37 lb

Worksurface Shape	LW	LD	RW	RD	Style Number	Worksurface Weight
90° Corner	42 ¹ /4"	171/8"	421/4"	17 ¹ /8"	9UAPSC1845	43 lb
	42 ¹ /4"	2225/32"	42 ¹ /4"	22 ²⁵ /32"	9UAPSC2545	47 lb

:

Airtouch Height-AdjusTable Worksurfaces

Airtouch Height-AdjusTable Worksurfaces

High-Pressure Laminate Universal Tables

			Required to Specify
Need help? Product details, page 294	 High-Pressure Laminate works edge or P-edge profile on all si Worksurface corners: radius Height-AdjusTable column med 4799 Platinum Height-AdjusTable mechanism 	des chanism: base: paint	 Style number with appropriate edge profile suffix: Laminate with plastic P-edge See edge profiles below. High-Pressure Laminate color number for worksurface Plastic color number for profile edge on laminate worksurface Paint color number for base: 4799 Platinum Metallic 7207 Black 7246 Midnight Metallic Options, if selected (see below) See Surface Materials, page 442.
	Options	U.S. Price	Required to Specify
Surface Materials	 Paint price group 1 Paint price group 2 Open Line laminate 	No cost +\$38 +\$67 plus cost of laminate	Specify paint color number. Specify paint color number. See Surface Materials Reference Manual
Related Products	 Slatwall, SlatRail, and Freestanding Worktools SOTO rail/shelves and worktools SOTO II worktools Flat panel arms Privacy/modesty screens and cableways Cable and power management 		 Page 32 Page 49 Page 60 Page 190 Page 352 Page 358
	page 294 Surface Materials Related	Product details, page 294 High-Pressure Laminate works edge or P-edge profile on all si edge or P-edge profile on all si Worksurface corners: radius Height-AdjusTable column med 4799 Platinum Height-AdjusTable column med 4799 Platinum Uptions Dual-arm spring assist mechanism Dual-arm spring assist mechanism Dual-arm spring assist mechanism Vorksurface Attachment hardware Variation Paint price group 1 Paint price group 2 Open Line laminate Related Surfaces Products Slatwall, SlatRail, and Freestar Flat panel arms Flat panel arms Privacy/modesty screens and of	 Need help? Product details, page 294 High-Pressure Laminate High-Pressure Laminate worksurface edge: plastic 3 mm edge or P-edge profile on all sides

Tip: Knife edge, urethane profile, and wood veneer worksurface options are available through specials.

Tip: Paint surface options apply to base only. Paint surface option does not apply to column.

Tip: To specify 3 mm edge profile, no suffix is required. For P-edge profile, add suffix **P** to the style number (for example, BAPSS2442P).

Tip: Monitor arms with Cclamp brackets should not be specified with P-edge worksurfaces.



For Canadian Pricing Multiply U.S. Price by the Canadian price factor.
See page 1 for details. Tip: Only single and dual flat panel monitor arm applications are permitted for use with single column height adjustable tables. Tip: To specify 3 mm edge profile, no suffix is required. For P-edge profile, add suffix **P** to the style number (for example, BAPSS2442P).

Tip: Eyesite and cableways should not be specified with 22¹/4"D rectangular worksurfaces.


Tip: 58" privacy/modesty screens should not be specified with 22¹/4"D rectangular worksurfaces.







Specification	Information
opeointoution	

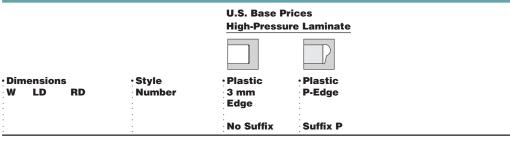

Rectangular Tables

22 ¹ /4"D						
40"	221/4"	221/4"	BAPSS2442	\$2236	\$2288	
46"	221/4"	221/4"	BAPSS2448	\$2268	\$2320	
58"	221/4"	221/4"	BAPSS2460	\$2339	\$2400	

28 ¹ /4"D							
40"	281/4"	281/4"	BAPSS3042	\$2328	\$2380		
46"	281/4"	281/4"	BAPSS3048	\$2363	\$2415		
58"	28 ¹ /4"	281/4"	BAPSS3060	\$2436	\$2497		
:			:	:	:		

Rectangular Bi-Level Tables

	•					
40"	341/4"	341/4"	BAPDS3642	\$3136	\$3232	
46"	341/4"	341/4"	BAPDS3648	\$3165	\$3261	


Specification Information, continued on next page



Dimensions

34"

Tip: To specify 3 mm edge profile, no suffix is required. For P-edge profile, add suffix P to the style number (for example, BAPSS2442P).







U.S. Base Prices

• Plastic

High-Pressure Laminate

• Plastic



22 ¹ /4"	34"	22 ¹ /4"	BAPB2436	\$2763	\$2884	



Specification Information, continued from previous page

Specification Information

Airtouch Height-AdjusTable Worksurfaces

Airtouch Height-AdjusTable Worksurfaces

High-Pressure Laminate For Use with Universal Systems

Need help?

page 294

Product details,

W	

Tip: Airtouch Height-AdjusTable base requires assembly and attachment to the worksurface.

Tip: Worksurfaces ship with pre-drilled holes for mounting bases.

Tip: An adjustment feature on the column allows the unit to function property with any load up to 150 lb, including the worksurface.

Tip: Mobile pedestals higher than 241/2" will impede the lower height range of the worksurface. Do not place storage underneath paddle.

Tip: Counterweights may be necessary to order if there is not enough load on the worksurface. Order service part (946900053SR).

Tip: For help determining privacy/modesty screen, cableway, SOTO rail, and SlatRail width compatibility, see Worktools Compatibility Charts, page 264.

Tip: Knife edge, urethane profile, and wood veneer worksurface options are available through specials.

Tip: Paint surface options apply to base only. Paint surface option does not apply to column.

Tip: To specify 3 mm edge profile, no suffix is required. For P-edge profile, add suffix P to the style number (for example, UAPSS2442P).

Tip: Only single and dual flat panel monitor arm applications are permitted for use with single column height adjustable tables.



For Canadian Pricing Multiply U.S. Price by the Canadian price factor. See page 1 for details.

Standard Includes

- High-Pressure Laminate
- · High-Pressure Laminate worksurface edge: plastic 3 mm edge or P-edge profile on front edge of worksurface with matching 1 mm plastic on sides and back
- Worksurface corners: 90° · Height-AdjusTable column mechanism:
- 4799 Platinum
- · Height-AdjusTable mechanism base: paint
- · Dual-arm spring assist mechanism for bi-level worksurfaces, if selected
- · Attachment hardware

Required to Specify

- 1 Style number with appropriate edge profile suffix:
- P Laminate with plastic P-edge
- See edge profiles below.
- 2 High-Pressure Laminate color number for worksurface
- 3 Plastic color number for profile edge on laminate worksurface
- 4 Paint color number for base: 4799 Platinum Metallic 7207 Black
- 7246 Midnight Metallic
- 5 Options, if selected (see below)
- See Surface Materials, page 442.

	Options	U.S. Price	Required to Specify
Surface	Paint price group 1	No cost	Specify paint color number.
Materials	 Paint price group 2 	+\$38	Specify paint color number.
	 Open Line laminate 	+\$67	See Surface Materials Reference Manual.
		plus cost of laminate	
Related	 Slatwall, SlatRail, and Fre 	estanding Worktools	► Page 32
Products	 SOTO rail/shelves and wo 	orktools	► Page 49
	 SOTO II worktools 		▶ Page 60
	 Flat panel arms 		▶ Page 190
	 Privacy/modesty screens 	and cableways	▶ Page 352
	 Cable and power manage 	ment	▶ Page 358

Tip: To specify 3 mm edge profile, no suffix is required. For P-edge profile, add suffix **P** to the style number (for example, UAPSS2442P).

Tip: Eyesite and cableways should not be specified with 22¹/4"D rectangular worksurfaces.


Tip: 58" privacy/modesty screens should not be specified with 22¹/4"D rectangular worksurfaces.







Spe	cifica	tion	Info	mation

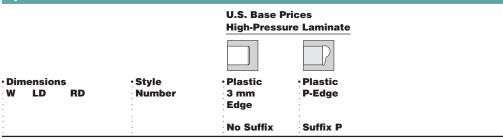

Rectangular Worksurfaces

22 ¹ /4"D						
40"	221/4"	22 ¹ /4"	UAPSS2442	\$2190	\$2242	
46"	22 ¹ /4"	22 ¹ /4"	UAPSS2448	\$2220	\$2272	
58"	22 ¹ /4"	22 ¹ /4"	UAPSS2460	\$2280	\$2341	

28 1/4	" D					
40"	281/4"	281/4"	UAPSS3042	\$2268	\$2320	
46"	281/4"	281/4"	UAPSS3048	\$2303	\$2355	
58"	281/4"	281/4"	UAPSS3060	\$2373	\$2434	

Rectangular Bi-Level Worksurfaces

40"	341/4"	341/4"	UAPDS3642	\$3088	\$3140	
46"	341/4"	34 ¹ /4"	UAPDS3648	\$3117	\$3169	

Specification Information, continued on next page

Tip: To specify 3 mm edge profile, no suffix is required. For P-edge profile, add suffix **P** to the style number (for example, BAPSS2442P).



					U.S. Base High-Press	Prices sure Laminate
Dime LW	nsions LD	RW	RD	• Style Number	• Plastic 3 mm Edge	• Plastic P-Edge
				•	No Suffix	Suffix P
90° (Corner	Works	surface	s		
391/4"	16 ¹ /4"	391/4"	16 ¹ /4"	UAPSC1842	\$2347	\$2468
391/4"	221/4"	391/4"	221/4"	UAPSC2442	\$2362	\$2483
	221/4"	451/4"	221/4"	UAPSC2448	\$2399	\$2520

RW

RW

LW

RD



90° Corner Bi-Level Worksurfaces	
----------------------------------	--

45 ¹ /4" 22 ¹ /4" 45 ¹ /4" 22 ¹ /4" UAPDC2448 \$3160 \$3281	391/4"	22 ¹ /4"	391/4"	221/4"	UAPDC2442	\$3123	\$3244	 	
	45 ¹ /4"	22 ¹ /4"	45 ¹ /4"	22 ¹ /4"	UAPDC2448	\$3160	\$3281		
· · · · ·							•		



 34"
 221/4"
 34"
 221/4"
 UAPB2436
 \$2670
 \$2791



Airtouch Height-AdjusTable Worksurfaces

Airtouch Height-AdjusTable Worksurfaces

High-Pressure Laminate For Use with Series 9000

Need help?

page 294

Product details,



Tip: Airtouch Height-AdjusTable base requires assembly and attachment to the worksurface.

Tip: Worksurfaces ship with pre-drilled holes for mounting bases.

Tip: An adjustment feature on the column allows the unit to function property with any load up to 150 lb, includ ing the worksurface.

Tip: Mobile pedestals highe than 241/2" will impede the lower height range of the worksurface. Do not place storage underneath paddle

Tip: Counterweights may be necessary to order if there if not enough load on the worksurface. Order service part (946900053SR).

Tip: For help determining privacy/modesty screen, cableway, SOTO rail, and SlatRail width compatibility, see Worktools Compatibility Charts, page 264.

Tip: Knife edge, urethane profile, and wood veneer worksurface options are available through specials.

Tip: Paint surface options apply to base only. Paint surface option does not apply to column.

Tip: To specify 3 mm edge profile, no suffix is required. For P-edge profile, add suffix P to the style number (for example, 9UAPSC1845P).

Tip: Only single and dual flat panel monitor arm applications are permitted for use with single column height adjustable tables.



For Canadian Pricing Multiply U.S. Price by the Canadian price factor.

See page 1 for details.

Standard Includes

- · High-Pressure Laminate
- · High-Pressure Laminate worksurface edge: plastic 3 mm edge or P-edge profile on front edge of worksurface with matching 1 mm plastic on sides and back
- Worksurface corners: 90° · Height-AdjusTable column mechanism:
- 4799 Platinum
- · Height-AdjusTable mechanism base: paint
- · Attachment hardware

Required to Specify

- 1 Style number with appropriate edge profile suffix:
- P Laminate with plastic P-edge
- See edge profiles below.
- 2 High-Pressure Laminate color number for worksurface
- 3 Plastic color number for profile edge on laminate worksurface
- 4 Paint color number for base: 4799 Platinum Metallic 7207 Black
- 7246 Midnight Metallic
- 5 Options, if selected (see below)
- See Surface Materials, page 442.

	Options	U.S. Price	Required to Specify
Surface	 Paint price group 1 	No cost	Specify paint color number.
Materials	Paint price group 2	+\$38	Specify paint color number.
	Open Line laminate	+\$67	See Surface Materials Reference Manua
	·	plus cost of laminate	
Related	 Slatwall, SlatRail, and Fre 	estanding Worktools	► Page 32
Products	 SOTO rail/shelves and wo 	orktools	Page 49
	 SOTO II worktools 		► Page 60
	 Flat panel arms 		▶ Page 190
	Privacy/modesty screens	and cableways	▶ Page 352
	 Cable and power manage 	ment	▶ Page 358

Tip: To specify 3 mm edge profile, no suffix is required. For P-edge profile, add suffix **P** to the style number (for example, 9UAPSC1845P).

Tip: Eyesite and cableways should not be specified with 22^{25/32"}D rectangular worksurfaces.




		U.S. Base High-Press	Prices sure Laminate
 Dimensions 	• Style	 Plastic 	• Plastic
W LD RD	Number	3 mm	P-Edge
•	•	Edge	•
	-	No Suffix	Suffix P

Rectangular Worksurfaces

43"	22 ²⁵ /32" 22 ²⁵ /32"	9UAPSS2545	\$2220	\$2272
43"	27 ²⁵ /32" 27 ²⁵ /32"	9UAPSS3045	\$2303	\$2355
:		:	:	:

Specification Information

		U.S. Base High-Press	Prices sure Laminate
• Dimensions	• Style	• Plastic	• Plastic
LW LD RW RD	Number	3 mm	P-Edge
•		Edge	•
	•	No Suffix	Suffix P




90° Corner Worksurfaces


421/4"	171/8"	421/4"	171/8"	9UAPSC1845	\$2362	\$2483	
42 ¹ /4"	22 ²⁵ /32"	421/4"	22 ²⁵ /32"	9UAPSC2545	\$2399	\$2520	
						•	




Details Specification Guide

Series 5 Height-AdjusTable Worksurfaces

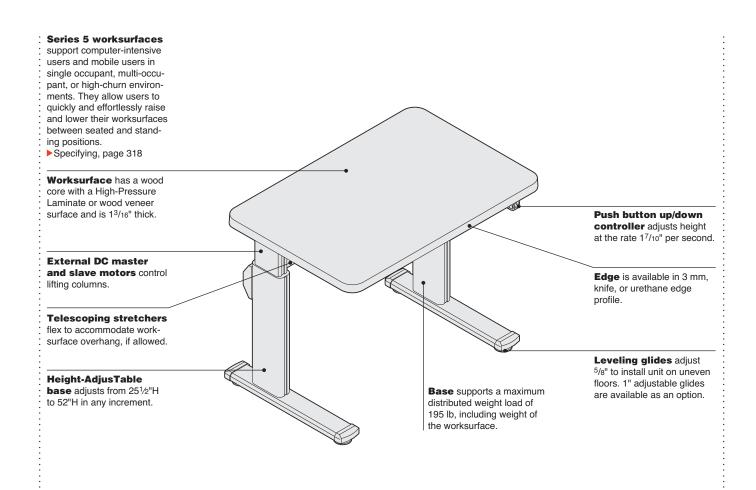

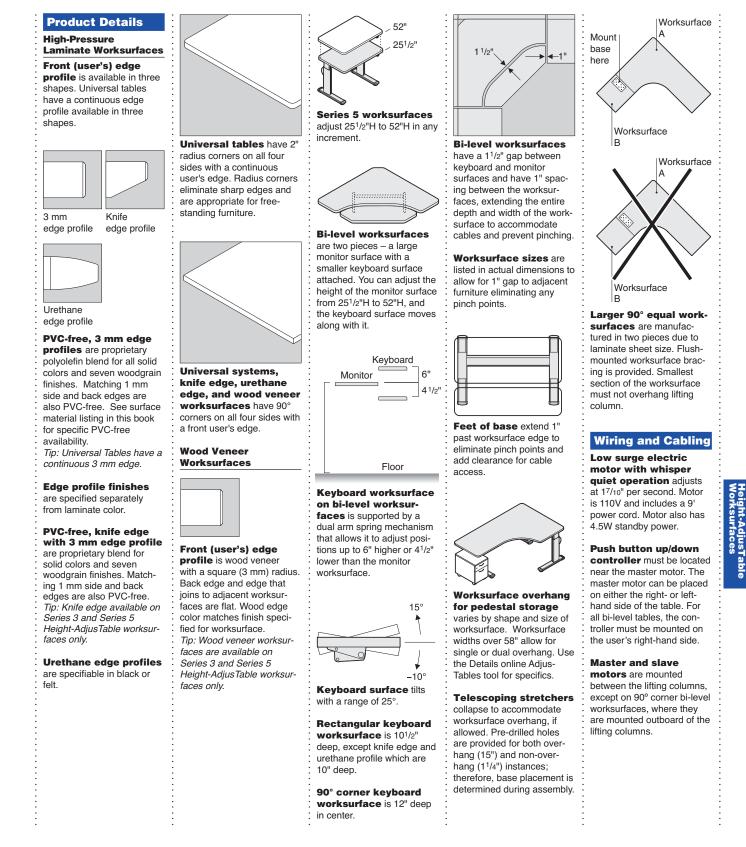

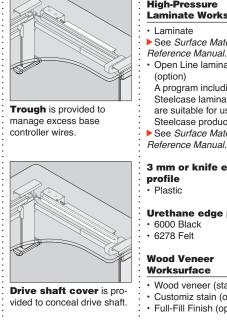

Surface Materials High-Pressure Laminate Worksurface

- · Laminate See Surface Materials Reference Manual.
- Open Line laminate (option)
- A program including non-Steelcase laminates which are suitable for use on
- Steelcase products. See Surface Materials

3 mm or knife edge profile

Plastic

Urethane edge profile 6000 Black

6278 Felt

Wood Veneer Worksurface

- Wood veneer (standard)
- Customiz stain (option) Full-Fill Finish (option)

Square 3 mm edge profile


· Wood veneer to match worksurface

Height-AdjusTable

- base • 0835 Black
- 4799 Platinum



with other components. Do not install overhead storage, desk-height power, or desk accessories in the path of Height-AdjusTable worksurfaces.



Screens mount to worksurfaces in privacy or below the worksurface for modesty.

See Worktools Compatibility Charts, page 264, for help determining appropriate screen widths for each Series 5 worksurface size.


Cableways mount to

worksurfaces to help manage cables at worksurface height for a clean aesthetic and can be used in combination with screens.

See Worktools Compatibility Charts, page 264, for help determining appropriate cableway widths for each Series 5 worksurface size.

SOTO Rail and SlatRail

mount to worksurfaces to support worktools, freeing up worksurface space. ▶See Worktools Compatibility Charts, page 264, for help determining appropriate SOTO rail and SlatRail widths for each Series 5 worksurface size.



27"H pedestal

Mobile pedestals higher than 24" will impede height range of worksurface.

Tip: If storage is not placed outside the lifting column as shown, storage higher than 20" will impede height range of worksurface.

Maximum distributed load-bearing weight including worksurface is 195 lb.


All assemblies meet or exceed ANSI/BIFMA standards.

Installation

Worksurfaces ship with pre-drilled holes for mounting bases.

Two-piece tops ship with flush mounted worksurface bracing.

Height-AdjusTable base requires attachment to the worksurface.




• • • • • •















Worksurface Shape	w	LD	RD	Style Number	Worksurfac Weight
Rectangular–23"D	34"	23"	23"	A5RQ342323	25 lb
	40"	23"	23"	A5RQ402323	29 lb
	46"	23"	23"	A5RQ462323	33 lb
	52"	23"	23"	A5RQ522323	37 lb
	58"	23"	23"	A5RQ582323	42 lb
	64"	23"	23"	A5RQ642323	46 lb
	70"	23"	23"	A5RQ702323	50 lb
	76"	23"	23"	A5RQ762323	54 lb
Rectangular–29"D	34"	29"	29"	A5RQ342929	31 lb
	40"	29"	29"	A5RQ402929	36 lb
	46"	29"	29"	A5RQ462929	42 lb
	52"	29"	29"	A5RQ522929	47 lb
	58"	29"	29"	A5RQ582929	52 lb
	64"	29"	29"	A5RQ642929	58 lb
	70"	29"	29"	A5RQ702929	63 lb
	76"	29"	29"	A5RQ762929	68 lb
Rectangular Bi-Level	40"	29"	29"	A5RQ402929	47 lb
	46"	29"	29"	A5RQ462929	53 lb
Taper-Flat	58"	29"	23"	A5RT582923	46 lb
	64"	29"	23"	A5RT642923	50 lb
	70"	29"	23"	A5RT702923	55 lb
	76"	29"	23"	A5RT762923	60 lb
	58"	23"	29"	A5RT582329	46 lb
	64"	23"	29"	A5RT642329	50 lb
	70"	23"	29"	A5RT702329	55 lb
	76"	23"	29"	A5RT762329	60 lb
Concave	58"	29"	29"	A5CQ582929	50 lb
	64"	29"	29"	A5CQ642929	55 lb
	70"	29"	29"	A5CQ702929	60 lb
	76"	29"	29"	A5CQ762929	65 lb
	4.01	001	0.011		01 lb

Bullet–23"D	46"	23"	23"	A5BQ462323	31 lb
	52"	23"	23"	A5BQ522323	36 lb
	58"	23"	23"	A5BQ582323	40 lb
	64"	23"	23"	A5BQ642323	44 lb
	70"	23"	23"	A5BQ702323	48 lb
	76"	23"	23"	A5BQ762323	53 lb
Bullet–29"D	46"	29"	29"	A5BQ462929	39 lb
	52"	29"	29"	A5BQ522929	44 lb
	58"	29"	29"	A5BQ582929	50 lb
	64"	29"	29"	A5BQ642929	55 lb
	70"	29"	29"	A5BQ702929	60 lb
	76"	29"	29"	A5BQ762929	66 lb

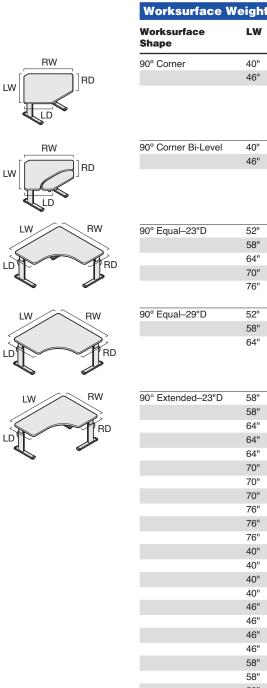

Worksurface W	, eigne,	Contract	lucu			
/orksurface hape	LW	LD	RW	RD	Style Number	Worksurface Weight
0° Corner	40"	23"	40"	23"	A5LQ40234023	45 lb
	46"	23"	46"	23"	A5LQ46234623	50 lb
0° Corner Bi-Level	40"	23"	40"	23"	A5LD40234023	55 lb
	46"	23"	46"	23"	A5LD46234623	67 lb
0° Equal–23"D	52"	23"	52"	23"	A5LQ52235223	60 lb
	58"	23"	58"	23"	A5LQ58235823	68 lb
	64"	23"	64"	23"	A5LQ64236423	81 lb
	70"	23"	70"	23"	A5LQ70237023	89 lb
	76"	23"	76"	23"	A5LQ76237623	98 lb
)° Equal–29"D	52"	29"	52"	29"	A5LQ52295229	70 lb
	58"	29"	58"	29"	A5LQ58295829	80 lb
	64"	29"	64"	29"	A5LQ64296429	97 lb
)° Extended–23"D	58"	23"	40"	23"	A5LE58234023	56 lb
	58"	23"	46"	23"	A5LE58234623	60 lb
	64"	23"	40"	23"	A5LE64234023	60 lb
	64"	23"	46"	23"	A5LE64234623	64 lb
	64"	23"	58"	23"	A5LE64235823	73 lb
	70"	23"	40"	23"	A5LE70234023	64 lb
	70"	23"	46"	23"	A5LE70234623	69 lb
	70"	23"	58"	23"	A5LE70235823	77 lb
	76"	23"	40"	23"	A5LE76234023	69 lb
	76"	23"	46"	23"	A5LE76234623	73 lb
	76"	23"	58"	23"	A5LE76235823	81 lb
	40"	23"	58"	23"	A5LE40235823	56 lb
	40"	23"	64"	23"	A5LE40236423	60 lb
	40"	23"	70"	23"	A5LE40237023	64 lb
	40"	23"	76"	23"	A5LE40237623	69 lb
	46"	23"	58"	23"	A5LE46235823	60 lb
	46"	23"	64"	23"	A5LE46236423	64 lb
	46"	23"	70"	23"	A5LE46237023	69 lb
	46"	23"	76"	23"	A5LE46237623	73 lb
	58"	23"	64"	23"	A5LE58236423	73 lb
	58"	23"	70"	23"	A5LE58237023	77 lb
	58"	23"	76"	23"	A5LE58237623	81 lb

LW	RW
LW	RW







Worksurface Shape	LW	LD	RW	RD	Style Number	Worksurface Weight
90° Extended–29"D	64"	29"	58"	29"	A5LE64295829	86 lb
	70"	29"	58"	29"	A5LE70295829	91 lb
	76"	29"	58"	29"	A5LE76295829	96 lb
	58"	29"	64"	29"	A5LE58296429	86 lb
	58"	29"	70"	29"	A5LE58297029	91 lb
	58"	29"	76"	29"	A5LE58297629	96 lb
90° Boot	64"	29"	58"	23"	A5LE64295823	75 lb
	70"	29"	40"	23"	A5LE70294023	67 lb
	70"	29"	46"	23"	A5LE70294623	71 lb
	70"	29"	58"	23"	A5LE70295823	80 lb
	76"	29"	40"	23"	A5LE76294023	72 lb
	76"	29"	46"	23"	A5LE76294623	76 lb
	76"	29"	58"	23"	A5LE76295823	84 lb
	40"	23"	70"	29"	A5LE40237029	67 lb
	40"	23"	76"	29"	A5LE40237629	72 lb
	46"	23"	70"	29"	A5LE46237029	71 lb
	46"	23"	76"	29"	A5LE46237629	76 lb
	58"	23"	64"	29"	A5LE58236429	75 lb
	58"	23"	70"	29"	A5LE58237029	80 lb
	58"	23"	76"	29"	A5LE58237629	84 lb
P-Table–23"D	64"	29"	58"	23"	A5PE64295823	78 lb
	70"	29"	46"	23"	A5PE70294623	74 lb
	70"	29"	58"	23"	A5PE70295823	83 lb
	76"	29"	46"	23"	A5PE76294623	80 lb
	76"	29"	58"	23"	A5PE76295823	88 lb
	46"	23"	70"	29"	A5PE46237029	74 lb
	46"	23"	76"	29"	A5PE46237629	80 lb
	58"	23"	64"	29"	A5PE58236429	78 lb
	58"	23"	70"	29"	A5PE58237029	83 lb
	58"	23"	76"	29"	A5PE58237629	88 lb
P-Table–29"D	64"	29"	58"	29"	A5PE64295829	83 lb
	70"	29"	58"	29"	A5PE70295829	88 lb
	76"	29"	58"	29"	A5PE76295829	94 lb
	58"	29"	64"	29"	A5PE58296429	83 lb
	58"	29"	70"	29"	A5PE58297029	88 lb
	58"	29"	76"	29"	A5PE58297629	94 lb
120° Equal	34"	23"	34"	23"	A5WQ34233423	45 lb
	40"	23"	40"	23"	A5WQ40234023	54 lb
	46"	23"	46"	23"	A5WQ46234623	63 lb
	52"	23"	52"	23"	A5WQ52235223	73 lb
	58"	23"	58"	23"	A5WQ58235823	82 lb
	64"	23"	64"	23"	A5WQ64236423	92 lb



Worksurface Weight, continued								
Worksurface Shape	LW	LD	RW	RD	Style Number	Worksurface Weight		
120° Extended	58"	23"	34"	23"	A5WE58233423	63 lb		
	58"	23"	40"	23"	A5WE58234023	68 lb		
	58"	23"	46"	23"	A5WE58234623	73 lb		
	64"	23"	34"	23"	A5WE64233423	68 lb		
	64"	23"	40"	23"	A5WE64234023	73 lb		
	64"	23"	46"	23"	A5WE64234623	78 lb		
	64"	23"	58"	23"	A5WE64235823	87 lb		
	34"	23"	58"	23"	A5WE34235823	63 lb		
	34"	23"	64"	23"	A5WE34236423	68 lb		
	46"	23"	64"	23"	A5WE40235823	78 lb		
	58"	23"	64"	23"	A5WE40236423	87 lb		

r	W
J	RD
·	W
	RD

Worksurface Shape	w	LD	RD	Style Number	Worksurface Weight
23"D Bubble Jetty	64"	29"	23"	A5JL642923	58 lb
	70"	29"	23"	A5JL702923	62 lb
	76"	29"	23"	A5JL762923	66 lb
	64"	23"	29"	A5JR642329	58 lb
	70"	23"	29"	A5JR702329	62 lb
	76"	23"	29"	A5JR762329	66 lb
29"D Bubble Jetty	64"	29"	29"	A5JL642929	62 lb
	70"	29"	29"	A5JL702929	67 lb
	76"	29"	29"	A5JL762929	73 lb
	64"	29"	29"	A5JR642929	62 lb
	70"	29"	29"	A5JR702929	67 lb
	76"	29"	29"	A5JR762929	73 lb

:

Series 5 Height-AdjusTable Worksurfaces

Series 5 Height-AdjusTable Worksurfaces High-Pressure Laminate or Wood Veneer

		Standard Includes	;	Required to Specify
RD Tip: Series 5 Height- AdjusTable base requires assembly and attachment to the worksurface ships with pre-drilled holes for mount- ing bases. Tip: Morksurface ships with pre-drilled holes for mount- ing bases. Tip: Maximum distributed load-bearing capacity is 195 lb per table including worksurface. Tip: Mobile pedestals higher than 20" will impede the low- est height range of worksur- face. If the overhang is installed, 24" high storage can be used. Tip: Only single and dual flat panel monitor arm applica- tions are permitted for use with 2-leg height adjustable	Need help? Product details, page 310	 Universal Systems or knift mm edge profile on front plastic on sides and back Urethane profile worksurf with matching plastic 3 m back Wood worksurface edges: Wood worksurface edges: Wood veneer square 3 m 1 mm matching veneer fla edges Worksurface corners: Radius corners on Univer 	orksurface edges: 3 mm edge profile on all sides ie edge worksurfaces: plastic 3 edge with matching 1 mm aces: urethane on front edge m edge profile on sides and m radius on front edge with at profile on side and back sal Tables, if selected Systems, knife edge, urethane, ofiles, if selected sit-to-stand base: paint roller	 Style number with appropriate edge profile suffix: U Universal Tables Y Universal Systems K Knife edge S Urethane profile V Wood veneer High-Pressure Laminate or wood color number for worksurface Plastic or urethane color number for profile edge on laminate worksurface, if selected Paint color for base: 0835 Black 4799 Platinum Options, if selected (see below) See Surface Materials, page 442.
tables.		Options	U.S. Price	Required to Specify
Tip: Worksurface overhang for pedestal storage varies by shape and size. Use the Details online AdjusTable tool for specifics.	Surface Materials	High-Pressure Lamina • Open Line laminate Wood veneer worksur	+\$67 plus cost of laminate	See Surface Materials Reference Manual
Premium Wood Pricing: For Premium wood 2 or		Premium wood 2 Premium wood 3 Customiz stain	See information at left See information at left No cost	Specify Premium wood 2 finish number. Specify Premium wood 3 finish number. Specify <i>with Customiz stain.</i>
Premium wood 3 pricing,		• Full-fill finish	Prices at right	See Surface Materials Reference Manual Specify full-fill finish number.
please refer to the electronic				
please refer to the electronic catalog or SmartTools.	Glides	• 1" adjustable glides	+\$28	Specify with 1" glides.

Tip: For all edge profiles, add a suffix to the style number. (For example, A5RQ342323 becomes A5RQ342323V for wood with square edge profile.)



See page 1 for details.

318

Page 358

· Cable and power management

Tip: Only single and dual flat panel monitor arm applications are permitted for use with 2-leg height adjustable tables.

		U.S. Base	Prices				
				\square			
Dimensions W LD RD	• Style Number	• Universal Tables	Universal Systems		• Urethane Profile		• Option (Add \$ to
			:				Base Price
	•				•	•	Full-Fill
		Suffix U	Suffix Y	Suffix K	Suffix S	Suffix V	Finish

\$1608

\$1658

\$1708

\$1762

\$1815

\$1873

\$1929

\$1988

\$1807

\$1862

\$1919

\$1979

\$2040

\$2102

\$2167

\$2234

\$1782

\$1836

\$1887

\$1944

\$2000

\$2059

\$2120

\$2183

\$1986

\$2046

\$2105

\$2168

\$2232

\$2298

\$2364

\$2436

\$2991

\$3051

\$2014

\$2070

\$2126

\$2186

\$2245

\$2309

\$2373

\$2441

\$2228

\$2291

\$2355

\$2419

\$2488

\$2558

\$2627

\$2702

\$3307

\$3372

\$2129

\$2187

\$2244

\$2307

\$2368

\$2436

\$2500

\$2569

\$2349

\$2413

\$2478

\$2547

\$2615

\$2688

\$2760

\$2836

\$3464

\$3529

+\$27

+\$46

+\$46

+\$46

+\$46

+\$67

+\$67

+\$67

+\$46

+\$46

+\$46

+\$67

+\$67

+\$67

+\$67

+\$67

+\$46

+\$46

Rectangular Worksurfaces

A5RQ342323 \$1666

\$1715

\$1767

\$1822

\$1877

\$1935

\$1991

\$2054

\$1868

\$1923

\$1981

\$2042

\$2102

\$2168

\$2233

\$2301

A5RQ402323

A5RQ462323

A5RQ522323

A5RQ582323

A5RQ642323

A5RQ702323

A5RQ762323

A5RQ342929

A5RQ402929

A5RQ462929

A5RQ522929

A5RQ582929

A5RQ642929

A5RQ702929

A5RQ762929

Rectangular Bi-Level Worksurfaces

23"D

23" 23"

23" 23"

23"

23" 23"

23" 23"

23" 23"

23" 23'

23" 23"

29"

29" 29"

29" 29"

29" 29'

29"

29" 29"

29" 29"

29" 29'

23'

29"

29'

34"

40"

46"

52"

58"

64"

70"

76"

34"

40"

46"

52"

58"

64"

70"

76"

29"D



W	RD
	~



40" 29' 29' A5RD402929 \$2833 \$2754 46" 29" 29" A5RD462929 \$2891 \$2812 Tip: The controller must be

Specification Information, continued on next page




mounted on the user's righthand side for all bi-level worksurfaces.


Tip: Taper-flat worksurfaces do not allow for worksurface overhang.

Tip: Taper-flat worksurfaces utilize a 29"D base causing the foot to extend past the worksurface on the 23"D side.

Tip: Only single and dual flat panel monitor arm applications are permitted for use with 2-leg height adjustable tables.







Tip: Concave worksurfaces do not allow for worksurface overhang.

Tip: Center of concave worksurface is 25¹/5"D.



Specification Information, continued from previous page

Sp	eciti	catio	n Information	1					
				U.S. Base	Prices				
						\square			
Din W	nensi LD		• Style Number	• Universal Tables	Universal Systems	·	• Urethane Profile		• Option (Add \$ to Base Price)
					· · · · ·	· · · · ·		· · · · ·	Full-Fill Finish
			- - - - -	Suffix U	Suffix Y	Suffix K	Suffix S	Suffix V	- - - - -
Гар	er-F	lat W	lorksurfaces						
Left	-Hane	ł							
58"	29"	23"	A5RT582923	\$2102	\$2040	\$2232	\$2488	\$2615	+\$67
64"	29"	23"	A5RT642923	\$2168	\$2102	\$2298	\$2558	\$2688	+\$67
70"	29"	23"	A5RT702923	\$2233	\$2167	\$2364	\$2627	\$2760	+\$67
76"	29"	23"	A5RT762923	\$2301	\$2234	\$2436	\$2702	\$2836	+\$67
Righ	nt-Hai	nd							
58"	23"	29"	A5RT582329	\$2102	\$2040	\$2232	\$2488	\$2615	+\$67
64"	23"	29"	A5RT642329	\$2168	\$2102	\$2298	\$2558	\$2688	+\$67
70"	23"	29"	A5RT702329	\$2233	\$2167	\$2364	\$2627	\$2760	+\$67
76" :	23"	29"	A5RT762329	\$2301 :	\$2234 :	\$2436 :	\$2702 :	\$2836 :	+\$67 :
Cor	icav	e Wo	rksurfaces						
58"	29"	29"	A5CQ582929	\$2102	\$2040	\$2232	\$2488	\$2615	+\$67
64"	29"	29"	A5CQ642929	\$2168	\$2102	\$2298	\$2558	\$2688	+\$67
70"	29"	29"	A5CQ702929	\$2233	\$2167	\$2364	\$2627	\$2760	+\$67
76"	29"	29"	A5CQ762929	\$2301 :	\$2234 :	\$2436 :	\$2702	\$2836 :	+\$67

Specification Information, continued on next page

Tip: Bullet worksurfaces are not recommended for use with pedestals.

Tip: Bullet worksurfaces with knife or urethane profile edges should not be specified with products that require a C-clamp.

Tip: Only single and dual flat panel monitor arm applications are permitted for use with 2-leg height adjustable tables.






				U.S. Base	Prices				
Din W	nensi LD	ons RD	• Style Number	Universal Tables	• Universal Systems	• Knife Edge	• Urethane Profile		• Option (Add \$ to Base Price) Full-Fill
						· · · · · · · · · · · · · · · · · · ·			Finish
				Suffix U	Suffix Y	Suffix K	Suffix S	Suffix V	
Bul	let V	Vorks	surfaces						
23"	D								
46"	23"	23"	A5BQ462323	\$1767	\$1708	\$1887	\$2126	\$2244	+\$46
52"	23"	23"	A5BQ522323	\$1822	\$1762	\$1944	\$2186	\$2307	+\$46
58"	23"	23"	A5BQ582323	\$1877	\$1815	\$2000	\$2245	\$2368	+\$46
64"	23"	23"	A5BQ642323	\$1935	\$1873	\$2059	\$2309	\$2436	+\$67
70"	23"	23"	A5BQ702323	\$1991	\$1929	\$2120	\$2373	\$2500	+\$67
76"	23"	23"	A5BQ762323	\$2054	\$1988	\$2183	\$2441	\$2569	+\$67
29"I	D								
46"	29"	29"	A5BQ462929	\$1981	\$1919	\$2105	\$2355	\$2478	+\$46
52"	29"	29"	A5BQ522929	\$2042	\$1979	\$2168	\$2419	\$2547	+\$67
58"	29"	29"	A5BQ582929	\$2102	\$2040	\$2232	\$2488	\$2615	+\$67
64"	29"	29"	A5BQ642929	\$2168	\$2102	\$2298	\$2558	\$2688	+\$67
70"	29"	29"	A5BQ702929	\$2233	\$2167	\$2364	\$2627	\$2760	+\$67
76"	29"	29"	A5BQ762929	\$2301	\$2234	\$2436	\$2702	\$2836	+\$67
						•	-		•

Specification Information, continued on next page



Specification Information, continued from previous page

Specification Information

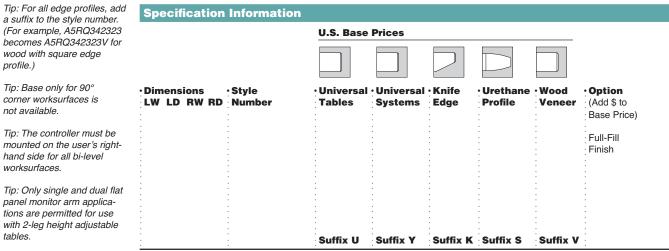

Specification Information, continued from previous page



40"	23"	40"	23"	A5LQ40234023	\$1944	\$1854	\$2122	\$2475	\$2652	+\$ 46
46"	23"	46"	23"	A5LQ46234623	\$2007	\$1915	\$2185	\$2545	\$2725	+\$ 67
-										•

90° Corner Bi-Level Worksurfaces

46" 23" 46" 23" A5LD46234623 \$2800 \$2691 \$3020 \$3459 \$3679 +\$ 67	40"	23"	40"	23"	A5LD40234023	\$2739	\$2632	\$2957	\$3389	\$3607	+\$ 46
	46"	23"	46"	23"	A5LD46234623	\$2800	\$2691	\$3020	\$3459	\$3679	+\$ 67

90° Equal Worksurfaces

23"	D									
52"	23"	52"	23"	A5LQ52235223	\$2729	\$2632	\$2925	\$3316	\$3512	+\$ 67
58"	23"	58"	23"	A5LQ58235823	\$2897	\$2794	\$3098	\$3501	\$3702	+\$ 67
64"	23"	64"	23"	A5LQ64236423	\$3074	\$2971	\$3284	\$3698	\$3905	+\$ 94
70"	23"	70"	23"	A5LQ70237023	\$3264	\$3158	\$3477	\$3905	\$4119	+\$ 94
76"	23"	76"	23"	A5LQ76237623	\$3464	\$3354	\$3685	\$4126	\$4347	+\$121
29"	D									
52"	29"	52"	29"	A5LQ52295229	\$2897	\$2794	\$3098	\$3501	\$3702	+\$ 67
58"	29"	58"	29"	A5LQ58295829	\$3074	\$2971	\$3284	\$3698	\$3905	+\$ 94
64"	29"	64"	29"	A5LQ64296429	\$3264	\$3158	\$3477	\$3905	\$4119	+\$ 94
				•	:	1	1	:	:	:

Specification Information, continued on next page



Tip: 64"W and 70"W 90°

equal worksurfaces ship in

Multiply U.S. Price by the Canadian price factor. See page 1 for details.

profile.)

not available.

worksurfaces.

tables.

LW

LW

columns.

LW

IW

two pieces.

Tip: Base only for 90°

RW

RW

I D Tip: The motors on all 90° . corner bi-level are mounted outboard of the lifting


RD

RD

RW


RW

RD

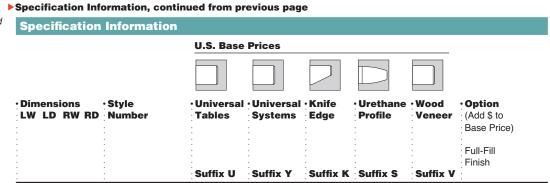

00 F...

LW	\sim	RW
	~	RD
LD	6	




90°	Ext	tena	led	Worksurfaces						
23"	D, Le	ft-H	and							
58"	23"	40"	23"	A5LE58234023	\$2648	\$2553	\$2842	\$3228	\$3420	+\$67
58"	23"	46"	23"	A5LE58234623	\$2729	\$2632	\$2925	\$3316	\$3512	+\$67
64"	23"	40"	23"	A5LE64234023	\$2729	\$2632	\$2925	\$3316	\$3512	+\$67
64"	23"	46"	23"	A5LE64234623	\$2812	\$2712	\$3009	\$3406	\$3604	+\$67
64"	23"	58"	23"	A5LE64235823	\$2985	\$2882	\$3187	\$3598	\$3803	+\$67
70"	23"	40"	23"	A5LE70234023	\$2812	\$2712	\$3009	\$3406	\$3604	+\$67
70"	23"	46"	23"	A5LE70234623	\$2897	\$2794	\$3098	\$3501	\$3702	+\$67
70"	23"	58"	23"	A5LE70235823	\$3074	\$2971	\$3284	\$3698	\$3905	+\$94
76"	23"	40"	23"	A5LE76234023	\$2897	\$2794	\$3098	\$3501	\$3702	+\$67
76"	23"	46"	23"	A5LE76234623	\$2985	\$2882	\$3187	\$3598	\$3803	+\$67
76"	23"	58"	23"	A5LE76235823	\$3168	\$3062	\$3379	\$3801	\$4010	+\$94
23"	D, Ri	ght-	Hand	ł						
40"	23"	58"	23"	A5LE40235823	\$2648	\$2553	\$2842	\$3228	\$3420	+\$67
40"	23"	64"	23"	A5LE40236423	\$2729	\$2632	\$2925	\$3316	\$3512	+\$67
40"	23"	70"	23"	A5LE40237023	\$2812	\$2712	\$3009	\$3406	\$3604	+\$67
40"	23"	76"	23"	A5LE40237623	\$2897	\$2794	\$3098	\$3501	\$3702	+\$67
46"	23"	58"	23"	A5LE46235823	\$2729	\$2632	\$2925	\$3316	\$3512	+\$67
46"	23"	64"	23"	A5LE46236423	\$2812	\$2712	\$3009	\$3406	\$3604	+\$67
46"	23"	70"	23"	A5LE46237023	\$2897	\$2794	\$3098	\$3501	\$3702	+\$67
46"	23"	76"	23"	A5LE46237623	\$2985	\$2882	\$3187	\$3598	\$3803	+\$67
58"	23"	64"	23"	A5LE58236423	\$2985	\$2882	\$3187	\$3598	\$3803	+\$67
58"	23"	70"	23"	A5LE58237023	\$3074	\$2971	\$3284	\$3698	\$3905	+\$94
58"	23"	76"	23"	A5LE58237623	\$3168	\$3062	\$3379	\$3801	\$4010	+\$94
					•		•			

Specification Information, continued on next page



Height-AdjusTable Worksurfaces

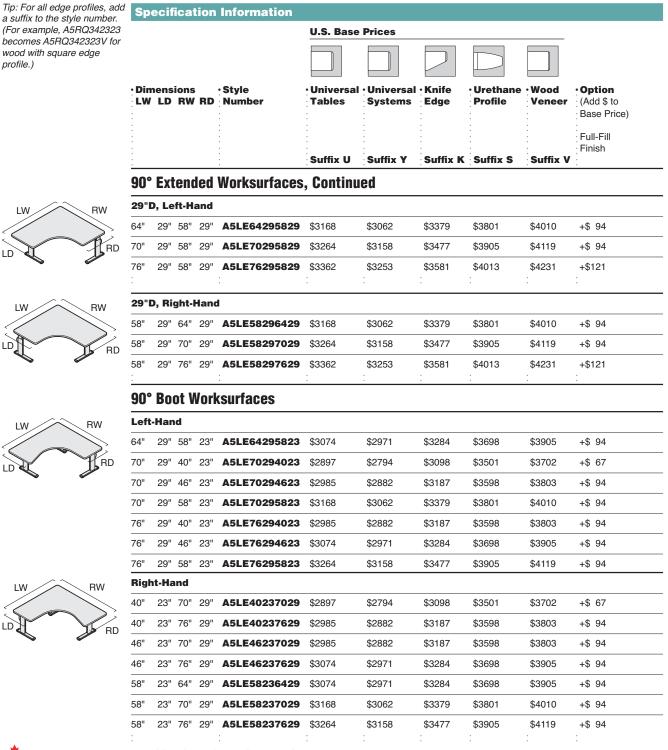


Specification Information, continued from previous page

Specification Information, continued on next page




Tip: P-Table worksurfaces provide an alternative to 90° extended corner worksurfaces.

Tip: P-Table worksurface overhang allows clearance for guest seating facing the user.





Tip: P-Table worksurfaces are not recommended for use with pedestals.





	-,			•							
58"	29"	64"	29"	A5PE58296429	\$3168	\$3062	\$3379	\$3801	\$4010	+\$ 94	
58"	29"	70"	29"	A5PE58297029	\$3264	\$3158	\$3477	\$3905	\$4119	+\$ 94	
58"	29"	76"	29"	A5PE58297629	\$3362	\$3253	\$3581	\$4013	\$4231	+\$121	

Specification Information, continued on next page

For Canadian Pricing Multiply U.S. Price by the Canadian price factor. See page 1 for details.

Height-AdjusTable Worksurfaces

Specification Information, continued from previous page **Specification Information**

	nens ′LD			• Style Number	Universal Tables	Universal Systems	Knife Edge	Urethane Profile	• Wood Veneer	• Option (Add \$ to Base Price)
•				•				•	•	Full-Fill Finish
:				•	Suffix U	Suffix Y	Suffix K	Suffix S	Suffix V	•
P-T	able	e W	ork	surfaces						
23"	D, Le	ft-H	and							
64"	29"	58"	23"	A5PE64295823	\$3074	\$2971	\$3284	\$3698	\$3905	+\$ 94
70"	29"	46"	23"	A5PE70294623	\$2985	\$2882	\$3187	\$3598	\$3803	+\$ 94
70"	29"	58"	23"	A5PE70295823	\$3168	\$3062	\$3379	\$3801	\$4010	+\$ 94
76"	29"	46"	23"	A5PE76294623	\$3074	\$2971	\$3284	\$3698	\$3905	+\$ 94
76"	29"	58"	23"	A5PE76295823	\$3264	\$3158	\$3477	\$3905	\$4119	+\$ 94
23"	D, Rig	ght-	Hand	I						
46"	23"	70"	29"	A5PE46237029	\$2985	\$2882	\$3187	\$3598	\$3803	+\$ 94
46"	23"	76"	29"	A5PE46237629	\$3074	\$2971	\$3284	\$3698	\$3905	+\$ 94
58"	23"	64"	29"	A5PE58236429	\$3074	\$2971	\$3284	\$3698	\$3905	+\$ 94
58"	23"	70"	29"	A5PE58237029	\$3168	\$3062	\$3379	\$3801	\$4010	+\$ 94
58"	23"	76"	29"	A5PE58237629	\$3264	\$3158	\$3477	\$3905	\$4119	+\$ 94
29"	D, Le	ft-H	and							
64"	29"	58"	29"	A5PE64295829	\$3168	\$3062	\$3379	\$3801	\$4010	+\$ 94
70"	29"	58"	29"	A5PE70295829	\$3264	\$3158	\$3477	\$3905	\$4119	+\$ 94
76"	29"	58"	29"	A5PE76295829	\$3362	\$3253	\$3581	\$4013	\$4231	+\$121
29"	D, Rig	ght-	Hand	1						
58"	29"	64"	29"	A5PE58296429	\$3168	\$3062	\$3379	\$3801	\$4010	+\$ 94
58"	29"	70"	29"	A5PE58297029	\$3264	\$3158	\$3477	\$3905	\$4119	+\$ 94

U.S. Base Prices

ר |

ר

ן ר

ר

Details Specification Guide

profile.)


IW

base.

IW

RW


RW

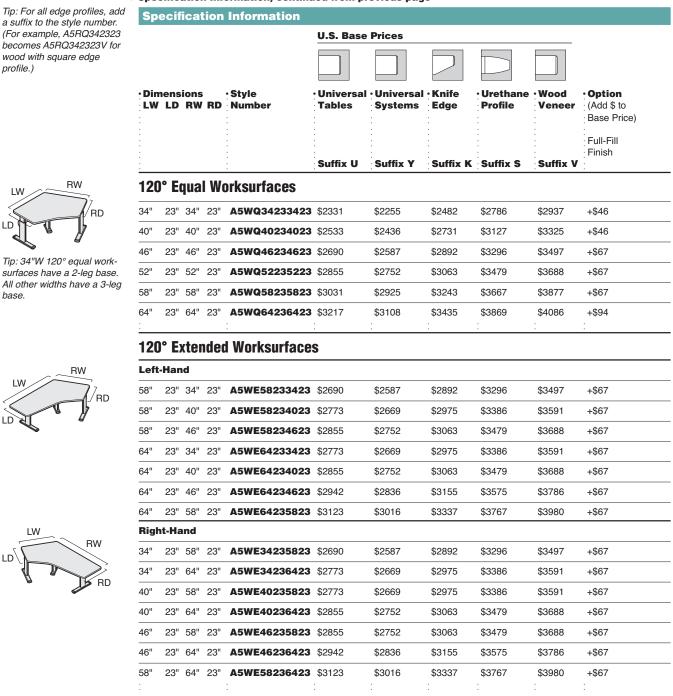

Specification Information, continued from previous page



Tip: Bubble jetty worksurface overhang allows clearance for guest seating facing the user.

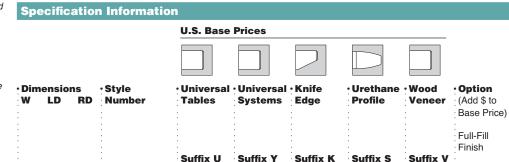

\$2938

\$3029

\$3123

\$2938

\$3029

\$3123

\$3264

\$3358

\$3458

\$3264

\$3358

\$3458

\$3698

\$3800

\$3904

\$3698

\$3800

\$3904

\$3915

\$4019

\$4128

\$3915

\$4019

\$4128

+\$67

+\$67

+\$67

+\$67

+\$67

+\$67

+\$67 +\$67 +\$67

Bubble Jetty Worksurfaces

A5JL642923

A5JL702923

A5JL762923

A5JR642329

A5JR702329

A5JR762329

\$3046

\$3137

\$3234

\$3046

\$3137

\$3234

23"

23"

23"

29"

29"

29"

23"D, Left-Hand

29'

29"

29"

23"D, Right-Hand

23'

23"

23"

29'

29'

29"

64"

70"


76"


64"


70"

76"

Specification Information, continued from previous page







	29"D, Left-Hand										
	64"	29"	29"	A5JL642929	\$3137	\$3029	\$3358	\$3800	\$4019		
RD	70"	29"	29"	A5JL702929	\$3234	\$3123	\$3458	\$3904	\$4128		
	76"	29"	29"	A5JL762929	\$3332	\$3218	\$3559	\$4012	\$4241		

W	29'
	64"
	70"
	76"
	70

Tip: Bubble jetty worksurfaces are not recommended for use with pedestals.

Tip: Bubble jetty worksurfaces with knife or urethane profile edges should not be specified with products that require a C-clamp on the rounded side of worksurface.



Details Specification Guide

9"D, Right-Hand 29" A5JR642929 \$3137 \$3029 \$3358 \$3800 \$4019 +\$67 29' A5JR702929 \$3234 \$3123 \$3458 \$3904 \$4128 +\$67 +\$67 29' A5JR762929 \$3332 \$3218 \$3559 \$4012 \$4241

Š	He
irks	ight
urfa	-Ad
ces	jus
	ab

Series 5 Bases

Tip: Maximum distributed load-bearing capacity is 220 lb per table including worksurface.

►Need help?

page 310

Product details,

Tip: Mobile pedestals higher than 20" will impede the lowest height range of worksurface. If the overhang is installed, 24" high storage can be used.

Tip: Worksurface overhang for use with pedestals is not recommended for taper-flat and concave worksurfaces.

Tip: Attachment hardware is intended for worksurfaces 13/16" thick only.

Tip: For overhang allowance for use with pedestals, use Details online AdjusTable tool for specifics.

Tip: 29"D bases are recommended for use with taper-flat and concave worksurfaces.

Tip: Only single and dual flat panel monitor arm applications are permitted for use with 2-leg height adjustable tables.

Tip: Use the Details online AdjustTable tool for specifics on bullet worksurfaces.





Tip: Bases are not recommended for Series 9000 worksurfaces with Height-AdjusTable channel braces attached to underside of worksurface.

Standard Includes

- · Electric Height-AdjusTable sit-to-stand base: paint · Push button up/down controller
- · Telescoping stretchers
- 5/8" adjustable glides
- Power cord: 9'
- · Attachment hardware

Required to Specify

- 1 Style number
 - 2 Paint color number for base: 0835 Black
 - 4799 Platinum
 - 3 Handedness of 90° base, if selected
 - 4 Options, if selected (see below)
 - See Surface Materials, page 442.

	Options	U.S. Price	Required to Specify
Glides	 1" adjustable glides 	+\$28	Specify with 1" glides.
Handedness (For use with 90°	 Right-hand, 90° extended bases 	No cost	Specify with right-hand configuration.
worksurfaces)	 Left-hand, 90° extended bases 	No cost	Specify with left-hand configuration.

Spec	cification	Information		
•Worksurface Dimensions		Style	·U.S.	
		Number	Base	
W	D	-	Price	
•			•	

Rectangular Bases

23"D			
34"-40"	23"	A5RQ34TO4023B	\$1836
46"–52"	23"	A5RQ46TO5223B	\$1847
58"	23"	A5RQ5823B	\$1861
64"–76"	23"	A5RQ64T07623B	\$1873
29"D			
34"–40"	29"	A5RQ34TO4029B	\$1856
46"–52"	29"	A5RQ46TO5229B	\$1867
58"	29"	A5RQ5829B	\$1878
64"–76"	29"	A5RQ64T07629B	\$1893



Specification Information, continued from previous page

Spe	cificat	tion In	formatio	on		
	csurfac			• Style	·U.S.	
Dime	ensions	•		Number	Base	
LW	LD	RW	RD		Price	



RD

30 E	yuai D	a9C9			
52"	23"–29"	52"	23"–29"	A5LQ52X52B	\$2428
58"	23"–29"	58"	23"–29"	A5LQ58X58B	\$2435
64"–76'	23"–29"	64"–76"	23"–29"	A5LQ64T076B	\$2450
:					· ·

applicable for left-hand worksurfaces.
LW


Tip: Right-hand sizes listed;

LW

ID

LD RD Tip: When using 90° base, the right- or left-hand configuration must be specified.





Tip: Right-hand sizes listed; applicable for left-hand worksurfaces.

90°	Extended I	Bases
------------	------------	-------

40"	23"–29" 58"	23"–29"	A5LE40X58B	\$2416
40"	23"–29" 64"–76"	23"–29"	A5LE40X64T076B	\$2431
46"	23"–29" 58"	23"–29"	A5LE46X58B	\$2428
46"	23"–29" 64"–76"	23"–29"	A5LE46X64T076B	\$2435
58"	23"–29" 64"–76"	23"–29"	A5LE58X64T076B	\$2440


120°	Equa	l Bases
-------------	------	---------


23"	40"	23"	A5WQ40X40B	\$2399
23"	46"–58"	23"	A5WQ46T058B	\$2423
23"	64"	23"	A5WQ64X64B	\$2445
	23"	23" 46"–58"	23" 46"–58" 23"	23" 46"–58" 23" A5WQ46T058B

1 20°	Exte	nded Ba	ses		
34"	23"	58"	23"	A5WE34X58B	\$2411
34"	23"	64"	23"	A5WE34X64B	\$2416
D 40"	23"	58"	23"	A5WE40X58B	\$2416
40"	23"	64"	23"	A5WE40X64B	\$2423
46"–58	" 23"	46"–58"	23"	A5WQ46T058B	\$2423
46"	23"	64"	23"	A5WE46X64B	\$2428
58"	23"	64"	23"	A5WE58X64B	\$2440
				•	•



Series 7 Height-AdjusTable Worksurfaces

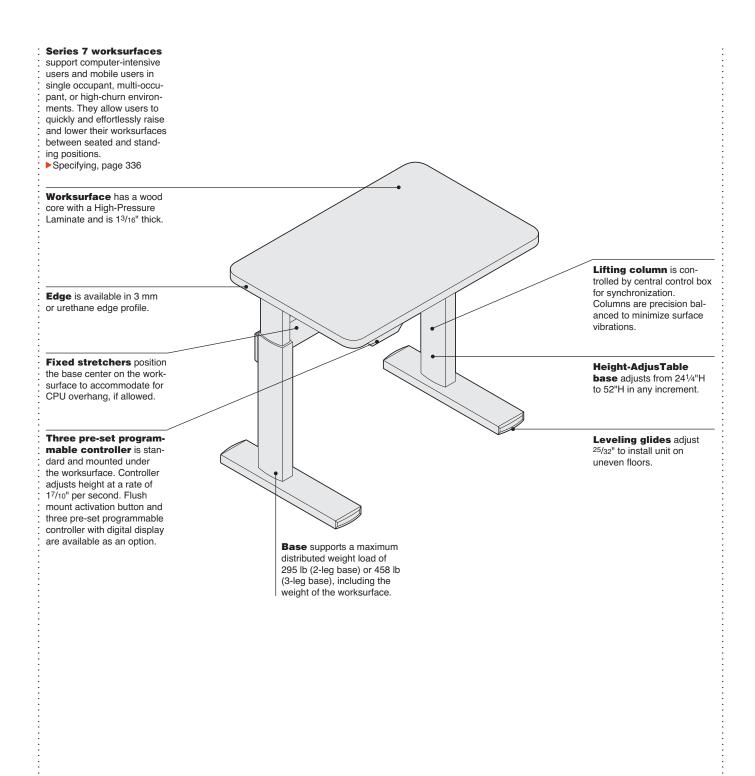

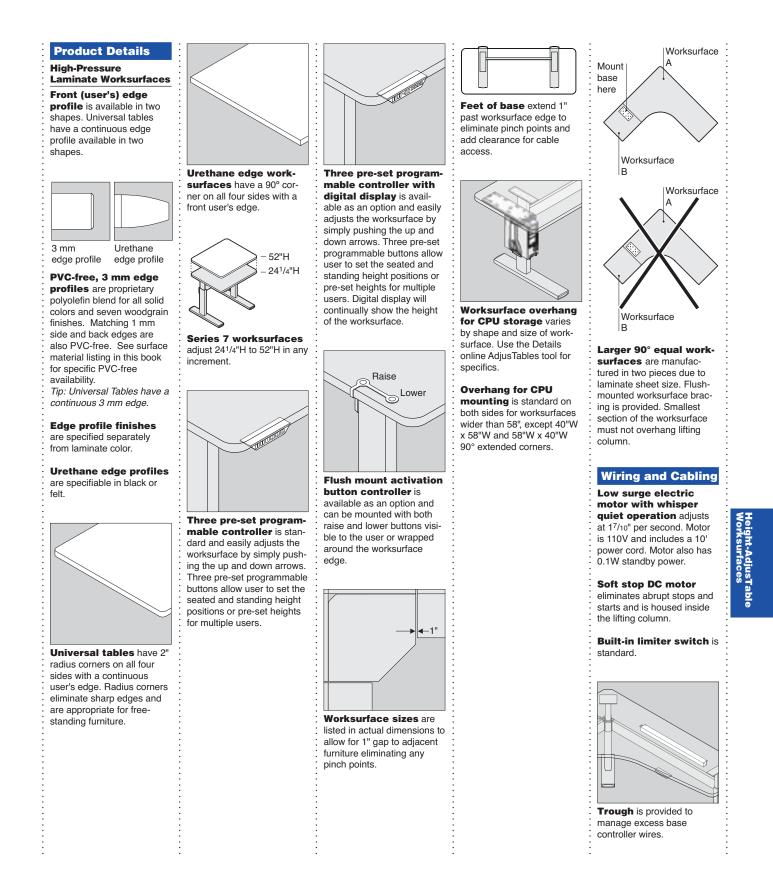

Surface Materials

High-Pressure Laminate Worksurface

- Laminate
- See Surface Materials Reference Manual.
- Open Line Iominete
- Open Line laminate (option)
 A program including non-
- Steelcase laminates which are suitable for use on
- Steelcase products.
 See Surface Materials
- Reference Manual.


3 mm profile • Plastic


Urethane edge profile • 6000 Black

• 6000 Black

- Height-AdjusTable base
- 0835 Black
 4799 Platinum

Application Topics Moving tables can collide with other components. Do not install overhead storage, desk-height power, or desk accessories in the path of Height-AdjusTable worksurfaces.





faces in privacy or below the worksurface for modesty.

See Worktools Compatibility Charts, page 264, for help determining appropriate screen widths for each Series 7 worksurface size.

Cableways mount to

worksurfaces to help manage cables at worksurface height for a clean aesthetic and can be used in combination with screens. > See Worktools Compatibility Charts, page 264, for help determining

appropriate cableway widths for each Series 7 worksurface size.

SOTO Rail and SlatRail

mount to worksurfaces to support worktools, freeing up worksurface space. See *Worktools*

Compatibility Charts, page 264, for help determining appropriate SOTO rail and SlatRail widths for each Series 7 worksurface size.

27"H

pedestal Mobile pedestals higher than 23¹/2" will impede height range of worksurface. Tip: Do not place storage underneath controller.

Maximum distributed load-bearing weight including worksurface is 295 lb (2-leg base) or 458 lb (3-leg base).

All assemblies meet or exceed ANSI/BIFMA standards.

Installation

Worksurfaces ship with pre-drilled holes for mounting bases.

Two-piece tops ship with flush mounted worksurface bracing.

Height-AdjusTable base requires attachment to the worksurface.

 LD
W RD

RW

[]|LD

LW

LW

LW

LW

RD

RW

RW

RD

RW

RW

RD

RD

RD

RD

LW

LD

LD

LD

LD

W

Worksurface V	Veight				
Worksurface Shape	w	LD	RD	Style Number	Worksurface Weight
Rectangular–23"D	34"	23"	23"	A7RQ342323	25 lb
	42"	23"	23"	A7RQ422323	29 lb
	46"	23"	23"	A7RQ462323	33 lb
	58"	23"	23"	A7RQ582323	42 lb
	66"	23"	23"	A7RQ662323	47 lb
	70"	23"	23"	A7RQ702323	50 lb
	78"	23"	23"	A7RQ782323	56 lb
Rectangular-29"D	34"	29"	29"	A7RQ342929	31 lb
	42"	29"	29"	A7RQ422929	38 lb
	46"	29"	29"	A7RQ462929	42 lb
	58"	29"	29"	A7RQ582929	52 lb
	66"	29"	29"	A7RQ662929	59 lb
	70"	29"	29"	A7RQ702929	63 lb
	78"	29"	29"	A7RQ782929	70 lb


Worksurface Shape	LW	LD	RW	RD	Style Number	Worksurface Weight
90° Corner	40"	23"	40"	23"	A7LQ40234023	45 lb
	46"	23"	46"	23"	A7LQ46234623	57 lb

90° Equal	58"	23"	58"	23"	A7LQ58235823	68 lb	
	70"	23"	70"	23"	A7LQ70237023	89 lb	

90° Extended	58"	23"	40"	23"	A7LE58234023	56 lb	
	58"	23"	46"	23"	A7LE58234623	60 lb	
	70"	23"	40"	23"	A7LE70234023	64 lb	
	70"	23"	46"	23"	A7LE70234623	69 lb	
	70"	23"	58"	23"	A7LE70235823	77 lb	
	40"	23"	58"	23"	A7LE40235823	54 lb	
	40"	23"	70"	23"	A7LE40237023	64 lb	
	46"	23"	58"	23"	A7LE46235823	60 lb	
90° Boot	70"	29"	46"	23"	A7LE70294623	71 lb	
	70"	29"	58"	23"	A7LE70295823	80 lb	
	46"	23"	70"	29"	A7LE46237029	71 lb	
	58"	23"	70"	29"	A7LE58237029	80 lb	
90° Taper	70"	18"	46"	18"	A7LE70184618	66 lb	
	70"	18"	58"	18"	A7LE70185818	75 lb	
	46"	18"	70"	18"	A7LE46187018	66 lb	
	58"	18"	70"	18"	A7LE58187018	75 lb	

Height-AdjusTable Worksurfaces

Details Specification Guide



Worksurface Shape	LW	LD	RW	RD	Style Number	Worksurface Weight
120° Equal	42"	23"	42"	23"	A7WQ42234223	71 lb
	48"	23"	48"	23"	A7WQ48234823	80 lb
	54"	23"	54"	23"	A7WQ54235423	71 lb
	66"	23"	66"	23"	A7WQ66236623	80 lb
120° Extended	54"	23"	38"	23"	A7WE54233823	63 lb
	66"	23"	54"	23"	A7WE66235423	84 lb
	38"	23"	54"	23"	A7WE38235423	63 lb
	54"	23"	66"	23"	A7WE54236623	84 lb

Series 7 Height-AdjusTable Worksurfaces

Series 7 Height-AdjusTable Worksurfaces

High-Pressure Laminate

		Otom double a bada a		Demained to Creatify
		Standard Includes		Required to Specify
RD Tip: Series 7 Height- AdjusTable base requires assembly and attachment to worksurface. Tip: Worksurface ships with pre-drilled holes for mount- ing bases.	Need help? Product details, page 330	 High-Pressure Laminate High-Pressure Laminate works –Universal Tables: plastic 3 mn –Urethane profile worksurfaces with matching plastic 3 mm ra and back Worksurface corners: –Radius corners on Universal T –90° corners on urethane work Electric Height-AdjusTable sit-tt Three pre-set programmable co Fixed stretchers Wire manager Power cord: 9' Attachment hardware 	n edge profile on all sides :: urethane on front edge dius edge profile on sides fables, if selected surface profiles, if selected p-stand base: paint	 Style number with appropriate edge profile suffix: U Universal Tables Urethane Profile High-Pressure Laminate color number for worksurface Plastic or urethane color number for profile edge on laminate worksurface, if selected Paint color for base: 0835 Black 4799 Platinum Options, if selected (see below) See <i>Surface Materials</i>, page 442.
Tip: Maximum distributed load-bearing capacity is 295		Options	U.S. Price	Required to Specify
<i>lb (2-leg base) or 458 lb (3-</i>	Surface	High-Pressure Laminate	worksurfaces	
leg base) per table including worksurface.	Materials	Open Line laminate	+\$67 plus cost of laminate	See Surface Materials Reference Manual.
Tip: Mobile pedestals higher than 23 ³ /4" will impede low-	Controller	Flush mount activation buttons	No cost	Specify with flush mount activation button controller.
est height range of worksur- face. Do not place storage		 Three pre-set programmable with digital display 	+\$45	Specify with three pre-set digital controller.

Related	 Slatwall, SlatRail, and Freestanding Worktools 	Page 32
Products	 SOTO rail/shelves and worktools 	► Page 49
	SOTO II worktools	► Page 60
	 Flat panel arms 	▶ Page 190
	 Privacy/modesty screens and cableways 	▶ Page 352
	 Cable and power management 	Page 358

face. Do not place storage underneath controller.

Tip: Worksurface over for CPU storage varies shape and size. Use the Details online AdjusTa tool for specifics.

Tip: For help determining privacy/modesty screen, cableway, SOTO rail, and SlatRail width compatibility, see Worktools Compatibility Charts, page 264.

Tip: Knife edge, Universal Systems, and wood veneer worksurface options are available through specials.

Tip: For all edge profiles, add a suffix to the style number. (For example, A7RQ342323 becomes A7RQ342323S for urethane edge profile.)

Tip: Only single and dual flat panel monitor arm applications are permitted for use with 2-leg height adjustable tables.



Multiply U.S. Price by the Canadian price factor. See page 1 for details.

Tip: Only single and dual flat panel monitor arm applications are permitted for use with 2-leg height adjustable tables.

W LD RD





Specificatio	on Information		
		U.S. Base P	rices
Dimensions	• Style	• Universal	·Urethane

tyle	• Universal	·Urethan
umber	Tables	Profile
	Suffix U	Suffix S

Rectangular Worksurfaces


Ν


23"	D						
34"	23"	23"	A7RQ342323	\$2207	\$2587		
42"	23"	23"	A7RQ422323	\$2258	\$2638		
46"	23"	23"	A7RQ462323	\$2309	\$2689		
58"	23"	23"	A7RQ582323	\$2411	\$2791		
66"	23"	23"	A7RQ662323	\$2461	\$2841		
70"	23"	23"	A7RQ702323	\$2512	\$2892		
78"	23"	23"	A7RQ782323	\$2563	\$2943		
29"	D						
34"	29"	29"	A7RQ342929	\$2304	\$2690		
42"	29"	29"	A7RQ422929	\$2355	\$2741		
46"	29"	29"	A7RQ462929	\$2406	\$2792		
58"	29"	29"	A7RQ582929	\$2507	\$2893		
66"	29"	29"	A7RQ662929	\$2558	\$2944		
70"	29"	29"	A7RQ702929	\$2609	\$2995		
78"	29"	29"	A7RQ782929	\$2660	\$3046		
•			•		•		



Tip: Base only for 90° corner worksurfaces is not available.

Tip: Only single and dual flat panel monitor arm applications are permitted for use with 2-leg height adjustable tables.





Tip: 70"W 90° equal worksurfaces ship in two pieces.

IW

RW

RD

RW



		U.S. Base P	ices
Dimensions LW LD RW RD	• Style Number	• Universal Tables	• Urethane Profile
		• • •	
•	•	Suffix U	Suffix S

40"	23"	40"	23"	A7LQ40234023	\$3455	\$3973	
46"	23"	46"	23"	A7LQ46234623	\$3509	\$4034	
				:	•	•	

90° Equal Worksurfaces


23"D							
58"	23"	58"	23"	A7LQ58235823	\$3932	\$4522	
70"	23"	70"	23"	A7LQ70237023	\$4264	\$4904	
:				:		:	


90° Extended Worksurfaces


23" 23" 23"	40" 46" 40"	23" 23" 23"	A7LE58234023 A7LE58234623	\$3761 \$3817	\$4324 \$4388	
		-	A7LE58234623	\$3817	\$4388	
23"	40"	23"			ψτοσο	
			A7LE70234023	\$3873	\$4455	
23"	46"	23"	A7LE70234623	\$3932	\$4522	
23"	58"	23"	A7LE70235823	\$4051	\$4659	
Rig	ht-Ha	nd				
23"	58"	23"	A7LE40235823	\$3761	\$4324	
23"	70"	23"	A7LE40237023	\$3873	\$4455	
23"	58"	23"	A7LE46235823	\$3817	\$4388	
23"	70"	23"	A7LE46237023	\$3932	\$4522	
23"	70"	23"	A7LE58237023	\$4051	\$4659	
2 2 2 2	3" Rig 3" 3" 3"	3" 58" Right-Ha 3" 58" 3" 70" 3" 58" 3" 70"	3" 58" 23" Right-Hand 3" 58" 23" 3" 70" 23" 3" 58" 23" 3" 70" 23" 3" 58" 23" 3" 70" 23" 3" 58" 23" 3" 70" 23"	3" 58" 23" A7LE70235823 Right-Hand 3" 58" 23" A7LE40235823 3" 70" 23" A7LE40235823 3" 58" 23" A7LE40235823 3" 58" 23" A7LE40235823 3" 58" 23" A7LE40235823 3" 58" 23" A7LE46235823 3" 70" 23" A7LE46235823	3" 58" 23" A7LE70235823 \$4051 Right-Hand 3" 58" 23" A7LE40235823 \$3761 3" 70" 23" A7LE40237023 \$3873 3" 58" 23" A7LE40237023 \$3873 3" 58" 23" A7LE40237023 \$3817 3" 58" 23" A7LE46237023 \$3932	3" 58" 23" A7LE70235823 \$4051 \$4659 Right-Hand 3" 58" 23" A7LE40235823 \$3761 \$4324 3" 70" 23" A7LE40237023 \$3873 \$4455 3" 58" 23" A7LE40235823 \$3817 \$4388 3" 58" 23" A7LE46237023 \$3932 \$4522











Specification Information, continued from previous page

Specification Info	ormation			
		U.S. Base Pri	ces	
Dimensions	Style	Universal	Urethane	
LW LD RW RD	Number	Tables	Profile	
•	- - -	Suffix U	Suffix S	

90° Boot Worksurfaces

Left-Hand								
70"	29"	46"	23"	A7LE70294623	\$3992	\$4591		
70"	29"	58"	23"	A7LE70295823	\$4111	\$4729		


Right-Hand								
46"	23"	70"	29"	A7LE46237029	\$3992	\$4591		
58"	23"	70"	29"	A7LE58237029	\$4111	\$4729		
:						:		

90° Taper Worksurfaces

Left-Hand							
70"	18"	46"	18"	A7LE70184618	\$3835	\$4411	
70"	18"	58"	18"	A7LE70185818	\$3951	\$4543	

Right-Hand								
46"	18"	70"	18"	A7LE46187018	\$3835	\$4411		
58"	18"	70"	18"	A7LE58187018	\$3951	\$4543		
:				:	1			





Specification Information, continued from previous page


				U.S. Base Prices				
Dimensions Style LW LD RW RD Number					• Universal Tables	• Urethane Profile		
				•	Suffix U	Suffix S		
			Marless					
120)° Eq		vorksl	irfaces				
	23"	42"	23"	A7WQ42234223	\$3899	\$4483		
12(42" 48"					\$3899 \$3978	\$4483 \$4575		
42"	23"	42"	23"	A7WQ42234223				

Extended worksurfaces 120

Left	Left-Hand						
54"	23"	38"	23"	A7WE54233823	\$3938	\$4529	
66"	23"	54"	23"	A7WE66235423	\$4159	\$4785	



RW





Series 7 Height-AdjusTable Worksurfaces

Series 7 Bases

Tip: Maximum distributed load-bearing capacity is 360 lb (2-leg base) and 540 lb (3-leg base) including worksurface.

Tip: Mobile pedestals higher than 23³/4" will impede lowest height range of worksurface. Do not place storage underneath controller.

Tip: For overhang allowance for use with CPUs, use Details online AdjusTable tool for specifics.

Tip: Bases are not recommended for Series 9000 worksurfaces with Height-AdjusTable channel braces attached to underside of worksurface.

Tip: Attachment hardware is intended for worksurfaces 1³/16" thick only.

Tip: Only single and dual flat panel monitor arm applications are permitted for use with 2-leg height adjustable tables.





ed Need help? s 360 Product details, page 330

Controller

Standard Includes

- Electric Height-AdjusTable sit-to-stand base: paint
 Three project programmable controller
- Three pre-set programmable controller
 Fixed stretchers
- Power cord: 9'
- Attachment hardware

Required to Specify

1 Style number

- 2 Paint color number for base: 0835 Black
- 4799 Platinum
- 3 Options, if selected (see below)

Required to Specify

See Surface Materials, page 442.

Options	U.S. Pr
Flush mount activation button	No cost

Three pre-set programmable +\$45
 with digital display

Specify with flush mount activation button controller. Specify with three pre-set digital controller.

Spec	ification	Information		
	surface	• Style	·U.S.	
Dimer	nsions	Number	Base	
W	D		Price	
:			:	

rice

Rectangular Bases

	-		
23"D			
34"	23"	A7RQ331919B	\$2293
42"- 46"	23"	A7RQ371919B	\$2304
58"	23"	A7RQ401919B	\$2315
66"	23"	A7RQ441919B	\$2327
70"	23"	A7RQ541919B	\$2338
78"	23"	A7RQ581919B	\$2349
29"D			
34"	29"	A7RQ332626B	\$2316
42"- 46"	29"	A7RQ372626B	\$2327
58"	29"	A7RQ402626B	\$2338
66"	29"	A7RQ442626B	\$2349
70"	29"	A7RQ542626B	\$2360
78"	29"	A7RQ582626B	\$2371
:			:



Specification Information, continued from previous page

Spe	cifica	tion In	formatio	on	
·Worl	csurfac	e		Style	·U.S.
Dime	ensions	5		Number	Base
LW	LD	RW	RD		Price







RD


90° Frual Rases

50	Equal	Dusus	,			
58"	23"	58"	23"	A7LQ44194419B	\$3130	
70"	23"	70"	23"	A7LQ58195819B	\$3330	
:						

90° Extended Bases







LW

Left-Hand 58" 23" A7LE54193316B 40" 23" \$3130 58" 23" 46" 23" A7LE44194016B \$3110 70" 23" 40" 23" A7LE58193316B \$3159 70" A7LE58194016B 18"–29" 46" 23" \$3205 70" 18"–29" A7LE58194419B \$3252 58" 23" **Right-Hand** 40" 23" 58" 23" A7LE33165419B \$3130 A7LE33165819B 40" 23" 70" 23" \$3159 46" 23" 58" 23" A7LE40164419B \$3110 46" 23" 70" A7LE40165819B \$3205 18"-29" 58" A7LE44195819B 23" 70" 18"-29" \$3252


120° Equal Bases

	-				
42"	23"	42"	23"	A7WQ37163716B	\$3128
48"	23"	48"	23"	A7WQ37193719B	\$3164
54"	23"	54"	23"	A7WQ44194419B	\$3198
66"	23"	66"	23"	A7WQ54195419B	\$3296

120° Extended Bases

Left-	Hand				
54"	23"	38"	23"	A7WE44193316B	\$3152
66"	23"	54"	23"	A7WE54194419B	\$3245

Right-Hand 38" 23" 54" 23" A7WE33164419B \$3152 54" 23" 66" 23" A7WE44195419B \$3245



RW


RD


For Canadian Pricing Multiply U.S. Price by the Canadian price factor. See page 1 for details.

Details Specification Guide

Height-AdjusTable Worksurfaces

FitWork: Walkstation and Sit-to-Walkstation

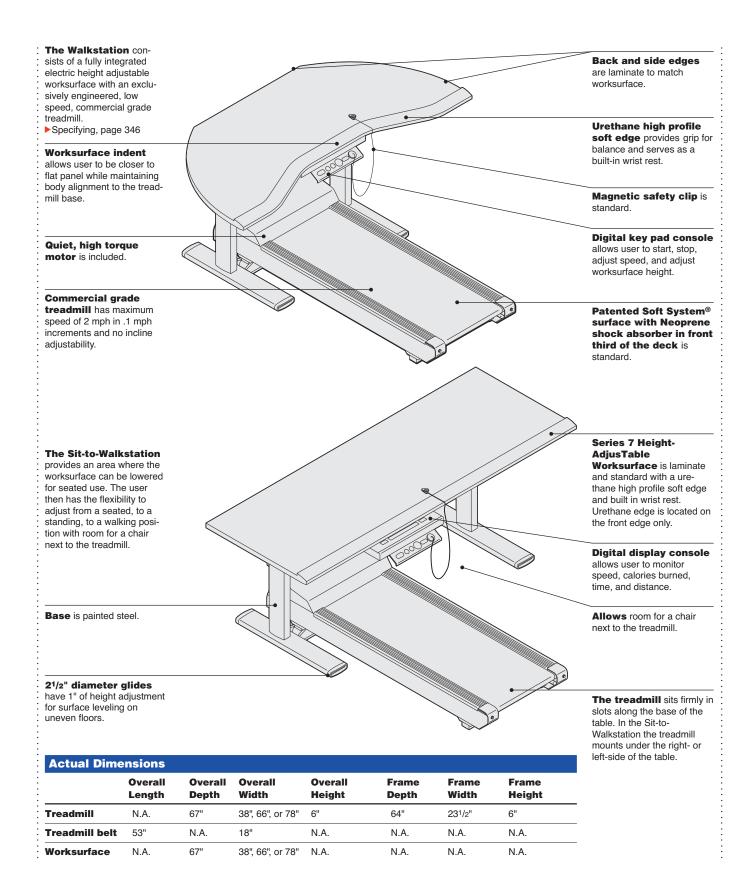

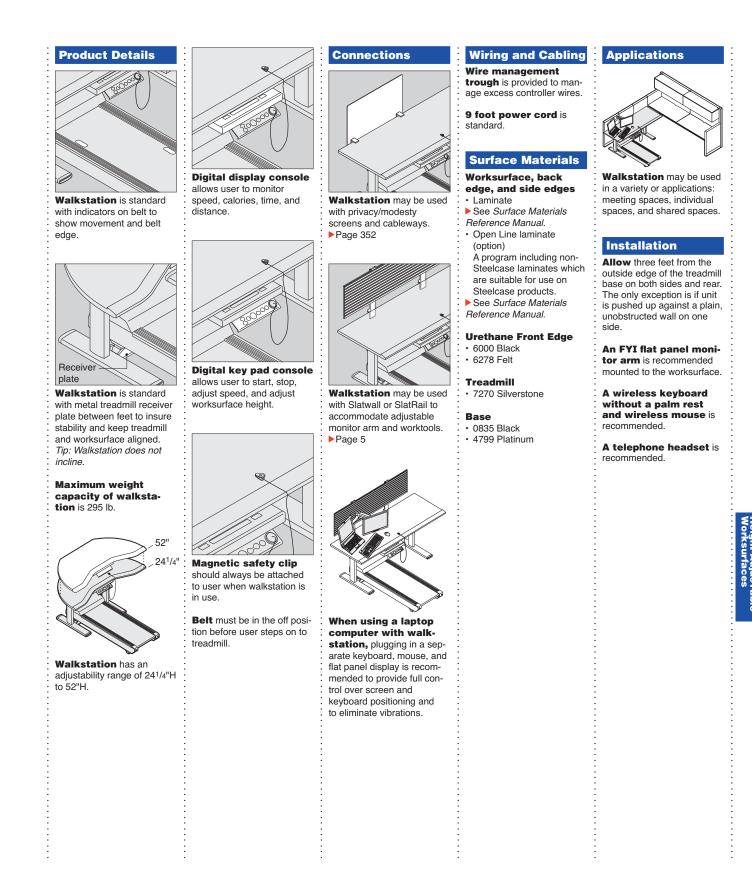

FitWork: Walkstation and Sit-to-Walkstation

		S	tandard l	ncludes		Required to Specify
Need help? Product details, page 344		 Worksurface: High-Pressure Laminate Worksurface front user's edge: urethane Back and side edges: matching laminate Base: paint Treadmill: 7270 Silverstone High-torque motor Digital display and keypad console Magnetic safety clip Glides 			 Style number High-Pressure Laminate color for worksurface Urethane edge color number: 6000 Black 6278 Felt Paint color number for base Options, if selected (see below) See Surface Materials, page 442. 	
Surfa Mate		Hi	ptions i gh-Pressu ben Line lami	re Laminate v nate	U.S. Price vorksurfaces +\$67 plus cost of laminate	Required to Specify See Surface Materials Reference Manua
Spe	cificat	ion Infe	ormation			
•Ove Foo W	rall tprint D		ksurface ensions D	·Weight	• Style Number	·U.S. Base Price
Wal	kstatio	ns				
66"	67"	66"	32"	330 lb	A7TG660606H	\$6960
66"	67"	66"	32"	330 lb	A7TR663232H	\$6960
00						



Sit-to-Walkstation

78" 67" 78" 29" 330 lb **A7TR782929H** \$7232

For Canadian Pricing Multiply U.S. Price by the Canadian price factor. See page 1 for details.

FitWork: Walkstation and Sit-to-Walkstation

FitWork: Kybun Footpad



Product Details

Kybun footpad is designed to enable healthy postures and movements for user.

Kybun footpad is

designed to be used with flat soled shoes. Not recommended for use with high or sharp heeled footwear.

Kybun footpad is for use on non-skid surfaces.

Surface Materials

• Burgundy

Care and Maintenance

Footpad cover can be washed in warm water (104°F) with similar colors.

Do not use steam, hot water, petroleum based solvents, or spot remover on footpad or footpad cover.

Disinfectant spray and odor blocker may be used up to twice a week to avoid germs and odors on footpad.

Store footpad flat.

Actual Dimensions 18" Depth 18" 21/2"

Width Height Weight 3.5 lb

FitWork: Kybun Footpad



	Standard Includes	Required to Specify
Need help? Product details, page 348	Footpad: burgundy	Style number
	Related Products	
	 Height-AdjusTable Worksurfaces 	▶ Page 239

Specification Information							
Dimensions		•Weight •Style	• Style	•U.S.			
D W H		Numbe	Number	Price			
18"	2 ¹ /2"	3.5 lb	FWKB18	\$327			
	sion:	sions	sions Weight	sions •Weight •Style	sions ·Weight ·Style ·U.S.		
	W	W H	W H	W H Number	W H · · · · · · · · · · · · · · · · · ·		




Details Specification Guide

Privacy Screens, Modesty Screens, and Cableways

Privacy Screens

 Specifying, page 352
 Tip: Screen may need to be shorter than worksurface width. To determine Screen/Cableway and Height-AdjusTable worksurface compatibility, see Worktools Compatibility Charts, page 264.



Product Details

Privacy screen provides lightweight space division above worksurface.

Gap between worksurface and screen/cableway is 1" to allow for cable feed through.


Privacy screen top is a fixed height 19" above worksurface.

Privacy screen can be used in combination with modesty screen and cableways.

Privacy screen ships with Universal clamps for field installation.

Product Details

Application Topics

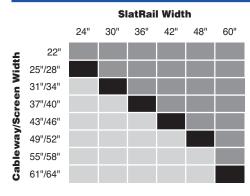

SlatRail stanchions mount on the outside of the screen or cableway

SlatRail stanchions will not work with the screen or cableway

SlatRail stanchions mount on the inside of the screen or cableway

Tip: SlatRail does not overhang the SlatRail stanchions; therefore, it is important to order the appropriate SlatRail size when used in combination with screens and cableway.

Surface Materials

Screen • 6544 Frost only

Universal clamp

0835 Black4799 Platinum


Actual	Dimensions
Depth	1/4"
Width	22", 28", 34", 40", 46", 52", 58", and 64"
Height	22"

Modesty Screens



Specifying, page 352

Tip: Screen may need to be shorter than worksurface width. To determine Screen/Cableway and Height-AdjusTable worksurface compatibility, see Worktools Compatibility Charts, page 264.



Modesty screen provides below worksurface modesty.

Gap between worksurface and screen/cableway is 1" to allow for cable feed through.

Modesty screen top is


a fixed height 1/4" above and $12^{1}/2$ " below worksurface.

Modesty screen can

be used in combination with privacy screen and cableways.

Modesty screen ships with Universal clamps for field installation.

Application Topics

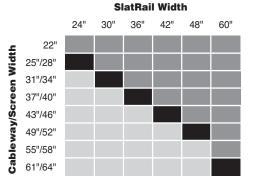

SlatRail stanchions mount on the outside of the screen or cableway

SlatRail stanchions will not work with the screen or cableway

SlatRail stanchions mount on the inside of the screen or cableway

Tip: SlatRail does not overhang the SlatRail stanchions; therefore, it is important to order the appropriate SlatRail size when used in combination with screens and cableway.

Surface Materials

Screen
6544 Frost only

Universal clamp

0835 Black4799 Platinum

Actual Dimensions

Depth	1/4"
Width	22", 28", 34", 40", 46", 52", 58", and 64"
Height	14"

April 2015


Cableways



Specifying, page 354

Tip: Cableways may need to be shorter than worksurface width. To determine Screen/ Cableway and Height-Adjus Table worksurface compatibility, see Worktools Compatibility Charts, page 264.

Product Details



Cableway allows user to manage cables and power at worksurface height for a clean aesthetic.


Cableway is a fixed height 1/4" above the worksurface.

Cableway with

Universal clamp can be used in combination with privacy and modesty screens. See page 352

Gap between worksurface and cableway is 1" to allow for cables to feed through.


Cableway is 3" shorter than screen width to accommodate Universal clamp.



Universal clamp, if selected, is for use with worksurfaces 1" to 2" thick.

Universal clamp, if selected, uses a 2" footprint above and below worksurface.

Universal clamp, if selected, is standard with rubber feet to ensure a tight fit without marring worksurface.




Horizontal brackets, if selected, screw into underside of worksurface.


Horizontal brackets,

if selected, require 2" of clearance below worksurface.

Application Topics

Cableway/Screen Width





SlatRail stanchions mount on the outside of the screen or cableway

SlatRail stanchions will not work with the screen or cableway

SlatRail stanchions mount on the inside of the screen or cableway

Tip: SlatRail does not overhang the SlatRail stanchions; therefore, it is important to order the appropriate SlatRail size when used in combination with screens and cableway.

Surface Materials

Cableway, Universal clamp, and horizontal bracket • 0835 Black

• 4799 Platinum

Dimensions

Depth	21/2"		
Width	25", 31", 37", 43", 49", 55", or 61"		
Height	8"		
Weight	4.7 lb-15.15 lb		

See specifying page 354 for exact weight.

Screens

Tip: Screen may need to be shorter than worksurface width. To determine Screen/Cableway and Height-AdjusTable worksurface compatibility, see Worktools Compatibility Charts, page 264.

Tip: 58"W and 64"W screens are not recommended for use with 22¹/4"D rectangular Airtouch worksurfaces.



Tip: 58"W and 64"W screens ship with three Universal clamps. All other screen widths ship with two Universal clamps.



Standard Includes

Screen: 6544 Frost only
Universal clamps: paint

- **Required to Specify**
- 1 Style number 2 Paint color number for Universal clamp: 0835 Black 4799 Platinum

Specification Information

►Need help?

page 350

Product details,

	•	:	Number	Price
Privacy	Screens On	ly		
22"	N.A.	5.67 lb	AP22	\$313
28"	N.A.	5.77 lb	AP28	\$329
34"	N.A.	6.17 lb	AP34	\$346
40"	N.A.	6.57 lb	AP40	\$364
46"	N.A.	6.77 lb	AP46	\$382
52"	N.A.	6.97 lb	AP52	\$400
58"	N.A.	7.27 lb	AP58	\$447
64"	N.A.	7.77 lb	AP64	\$464

Priva	cy Screens	with Cablewa	ay		
28"	25"	9.46 lb	ACP28	\$395	
34"	31"	10.81 lb	ACP34	\$429	
40"	37"	12.15 lb	ACP40	\$462	
46"	43"	13.3 lb	ACP46	\$498	
52"	49"	14.44 lb	ACP52	\$533	
58"	55"	15.68 lb	ACP58	\$598	

ACP64



61"

64"

22"	N.A.	4.27 lb	AM22	\$285
28"	N.A.	4.57 lb	AM28	\$304
34"	N.A.	4.87 lb	AM34	\$320
40"	N.A.	5.17 lb	AM40	\$337
46"	N.A.	5.52 lb	AM46	\$354
52"	N.A.	5.77 lb	AM52	\$372
58"	N.A.	5.97 lb	AM58	\$418
64"	N.A.	6.27 lb	AM64	\$434

\$632

Specification Information, continued on next page

17.13 lb



Specification Information, continued from previous page

Specification Information								
		·Weight	• Style	U.S.				
Width	Width	•	Number	Price				



Modesty Screens with Cableway

28"	25"	8.26 lb	ACM28	\$372
34"	31"	9.51 lb	ACM34	\$406
40"	37"	10.75 lb	ACM40	\$439
46"	43"	12.05 lb	ACM46	\$476
52"	49"	13.24 lb	ACM52	\$507
58"	55"	14.38 lb	ACM58	\$571
64"	61"	15.63 lb	ACM64	\$605
:	:		:	:

Modesty and Privacy Screens

22"	N.A.	8.07 lb	AMP22	\$509
28"	N.A.	8.57 lb	AMP28	\$545
34"	N.A.	9.27 lb	AMP34	\$579
40"	N.A.	9.97 lb	AMP40	\$614
46"	N.A.	10.52 lb	AMP46	\$649
52"	N.A.	10.97 lb	AMP52	\$685
58"	N.A.	11.47 lb	AMP58	\$747
64"	N.A.	12.27 lb	AMP64	\$782
:	:	:	:	:

Modesty and Privacy Screens with Cableway

	-	-		
28"	25"	12.26 lb	ACMP28	\$614
34"	31"	13.9 lb	ACMP34	\$666
40"	37"	15.55 lb	ACMP40	\$719
46"	43"	17.05 lb	ACMP46	\$771
52"	49"	18.44 lb	ACMP52	\$823
58"	55"	19.88 lb	ACMP58	\$904
64"	61"	21.63 lb	ACMP64	\$956
	•	:	:	:



For Canadian Pricing Multiply U.S. Price by the Canadian price factor. See page 1 for details.

Details Specification Guide

Height-AdjusTable Worksurfaces

Cableways

	St	anda	ard I	nclu	des
--	----	------	-------	------	-----

- Cableway: paint
- Product details, page 351

▶Need help?

- · Universal clamp, if selected: paint to match cableway
- Horizontal mounting bracket, if selected: paint to match cableway
- **Required to Specify**

1 Style number

- 2 Paint color number for cableway: 0835 Black
- 4799 Platinum

Specification Information

• Dim	ensions W	н	Weight	• Style Number	·U.S. Price
				:	

With Horizontal Mounting Bracket

			J -		
2 ¹ /2"	25"	8"	7.45 lb	AHORZ25	\$ 72
2 ¹ /2"	31"	8"	8.40 lb	AHORZ31	\$ 92
2 ¹ /2"	37"	8"	9.35 lb	AHORZ37	\$111
2 ¹ /2"	43"	8"	10.30 lb	AHORZ43	\$127
2 ¹ /2"	49"	8"	11.25 lb	AHORZ49	\$148
2 ¹ /2"	55"	8"	14.20 lb	AHORZ55	\$177
21/2"	61"	8"	15.15 lb	AHORZ61	\$194



No. 1

Tip: Cableway with Universal clamp can be used in combination with privacy and modesty screens. See page 352

Tip: Cableways may need to be shorter than worksurface width. To determine screen/ cableway and Height-Adjus Table worksurface compatibility, see Worktools Compatibility Charts, page 264.

Tip: Cableways are not recommended for use with 22¹/4"D rectangular Airtouch worksurfaces.

Tip: Cableways with Universal clamp are 3" shorter than privacy and modesty screen widths.

Tip: 55"W and 61"W cableways ship with three Universal clamps or horizontal brackets. All other cableway widths ship with two Universal clamps or horizontal brackets.



Multiply U.S. Price by the Canadian price factor. See page 1 for details.

With Universal Clamp

2 ¹ /2"	25"	8"	4.70 lb	AC25	\$154	
2 ¹ /2"	31"	8"	5.65 lb	AC31	\$171	
2 ¹ /2"	37"	8"	6.60 lb	AC37	\$189	
2 ¹ /2"	43"	8"	7.55 lb	AC43	\$206	
2 ¹ /2"	49"	8"	8.50 lb	AC49	\$222	
2 ¹ /2"	55"	8"	9.95 lb	AC55	\$269	
2 ¹ /2"	61"	8"	10.91 lb	AC61	\$285	
					•	

Cable and Power Management

/ertical Cable Carrier	Product Details Vertical cable carrier	Surface Materials Vertical cable carrier	Actual Width	Dimensions 21/2"	
	has a 52" flexible spine with two management channels	6688 Steel	Height	52"	
	to manage cords from below worksurface to the floor.		Weight	1 lb	
Specifying, page 358	Vertical cable carrier bracket attaches to the underside of the worksur- face and weighted base sits on floor.				
"D Wire Managers	Product Details	Surface Materials	Actual	Dimensions	
	Wire manager is flexible to manage cords underneath	Wire manager • 6000 Black	Depth	6"	
	the worksurface	6249 Platinum		30", 36", 42", 48", 54", and 60"	
Specifying, page 358	PVC-free ABX material is resistant to fatigue and recyclable.		Height	2"	
³ /4"D Wire Managers	Product Details	Surface Materials	Actual	Dimensions	
	Wire manager is flexible to manage cords underneath	Wire manager • 6000 Black	Depth	1 ³ /4"	
	the worksurface.			6", 12", 18", 23 ¹ /4", 30", 35", 42", and	
 Specifying, page 359 	PVC-free polypropylene material is resistant to fatigue and recyclable.			48" 1 ³ /4"	
Power/Data with C-clamp	Product Details	Surface Materials		Dimensions	
	Power/data is standard with two outlets, two	Power/data • 6544 Frost		3 ¹ /2"	
IN FILME	voice/data ports and 6' power cord.	Cord		2 ¹ /2"	
	Power/data clamps on worksurfaces 1" to 2" thick.	 Black plastic only 	rieight	<i>L</i> / <i>L</i>	
Tip: Power/data is not flush o the back of the worksur- ace. It extends 1 ¹ /4" off	Power/data includes a voice/data adapter kit to accept couplers and jacks when required.				
 back of worksurface. Specifying, page 359 	Power/data is U.L. and c.U.L. listed.				

PowerPincher with Occupancy Sensor	Product Details	Passive inferred occu- pancy sensor detects	Surface Materials	Actua	al Dimension
A Sensor	Power strip includes eight	slight motions within a	Housing	Depth	3 ³ /4"
	outlets for surge protection. Six outlets are controlled by	monitored area.	• Gray	Width	9 ¹ /2"
	sensor, two outlets are uncontrolled.	Rocker on/off switch is located on the top of the powerstrip.	Cord • Black plastic only	Height	11/2"
Specifying, page 360	Sensor can be positioned under worksurface, storage, or on wall up to 9' away from outlet.	Power supply uses a 7'8" cord standard with three prong plug.			
Specifying, page 360	Sensor is standard with 110 volt.	PowerPincher is U.L. and CSA listed.			
	Sensor time delay can be adjusted from 1 to 30 minutes.				

Cable and Power Management

Vertical Cable Carrier



6"D Wire Managers



Tip: Wire manager attaches to a clip that is affixed to the underside of a worksurface.

	Standard Includes	Required to Specify
Need help? Product details, page 356	 Wire manager: 6000 Black or 6249 Platinum Attachment hardware 	1 Style number 2 Plastic color number for wire manager

	ensions		·Weight	• Style	·U.S.
D	W	н	- - -	Number	Price
6"	301/2"	2"	0.13 lb	AWMXL30	\$ 67
6"	361/2"	2"	0.24 lb	AWMXL36	\$ 77
6"	421/2"	2"	0.34 lb	AWMXL42	\$ 87
6"	481/2"	2"	0.44 lb	AWMXL48	\$ 97
6"	54 ¹ /2"	2"	0.56 lb	AWMXL54	\$108
6"	60 ¹ /2"	2"	0.65 lb	AWMXL60	\$118



1³/4"D Wire Managers



Standard Includes ► Need help? • Wire manager: 6000 Black Product details, Attachment hardware page 356

Standard Includes

Required to Specify

Required to Specify

Style number

	Spe	cifica	ation In	formation			
	• Dime D	ension W	s H	• Weight	• Style Number	·U.S. Price	
	1 ³ /4"	6"	1 ³ /4"	0.13 lb	AWM06	\$23	
	1 ³ /4"	12"	1 ³ /4"	0.24 lb	AWM12	\$30	
	1 ³ /4"	18"	1 ³ /4"	0.34 lb	AWM18	\$35	
Tip: Actual width of AWM23	1 ³ /4"	23"	1 ³ /4"	0.44 lb	AWM23	\$40	
is 231/4".	1 ³ /4"	30"	1 ³ /4"	0.56 lb	AWM30	\$46	
	1 ³ /4"	35"	1 ³ /4"	0.65 lb	AWM35	\$51	
	1 ³ /4"	42"	1 ³ /4"	0.77 lb	AWM42	\$57	
	1 ³ /4" :	48"	1 ³ /4"	0.88 lb	AWM48	\$63 :	

Power/Data with C-clamp



Tip: Power/data extends 1¹/4" off the back of the worksurface.

Tip: Power/data does not fit between worksurface and screens/cableway.

	d help? Ict detail: 356		Power/data: 654 6' cord: black pla			Style number	
-	ecifica ension		formation	- Cáula			
Dim	W	H	·Weight	• Style Number	•U.S. Price		
3 ¹ /2"	8 ¹ /2"	21/2"	1.5 lb	AP2D2CC	\$165		





PowerPincher with Occupancy Sensor



 Need help? Product details, page 357
 B outlet power strip with occupancy sensor: gray only Mounting hardware 7'8" cord with standard 3-prong plug: black plastic only
 Specification Information

Required to Specify

Standard Includes

Tip: Sensor can be positioned under worksurface, storage unit, or on wall up to 9' away from outlet.

Dimensi	ification Information sions •Weight		• Style	·Style ·U.S.		•U.S.
D W	н		Number	Price		
33/4" 91/	/2" 1 ¹ /2"	2.5 lb	PPS6SP	: \$170		




Height-AdjusTable Series Benching



Overview	366
Bench Comparison Chart	367
Application Guidelines	368
Series 3 Height-AdjusTable Dual-Sided Base and Connection Benches	d
Understanding	372
Specifying	378
Series 5 Height-AdjusTable Dual-Sided Base and Connection Benches	d
Understanding	382
Specifying	388
Series 8 Height-AdjusTable Dual-Sided Base and Connection Benches	d
Understanding	392
Specifying	398
FrameOne Dual-Sided End Panels	
Understanding	402
Specifying	404
Centered Screens	
Understanding	406
Specifying	410
Fixed Personal Screens	
Understanding	412
Specifying	414
Power and Data	
Wiring Schematics	415
How to Calculate Power Needs	416
Base Power and Data	
Understanding	418
Specifying	426
Worksurface Power and Data	
Understanding	436
Specifying	438

Height-AdjusTable Series Benching


Statement of Line



W


Understanding Page 372 Specifying Page 378

Series 3 Height-AdjusTable Dual-Sided Base and Connection Benches

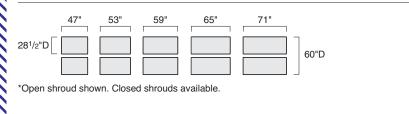




Series 5 Height-AdjusTable Dual-Sided Base and Connection Benches



*Open shroud shown. Closed shrouds available.

RD




Understanding
▶ Page 392
Specifying
► Page 398

Series 8 Height-AdjusTable Dual-Sided Base and Connection Benches



*Open shroud shown. Closed shrouds available.

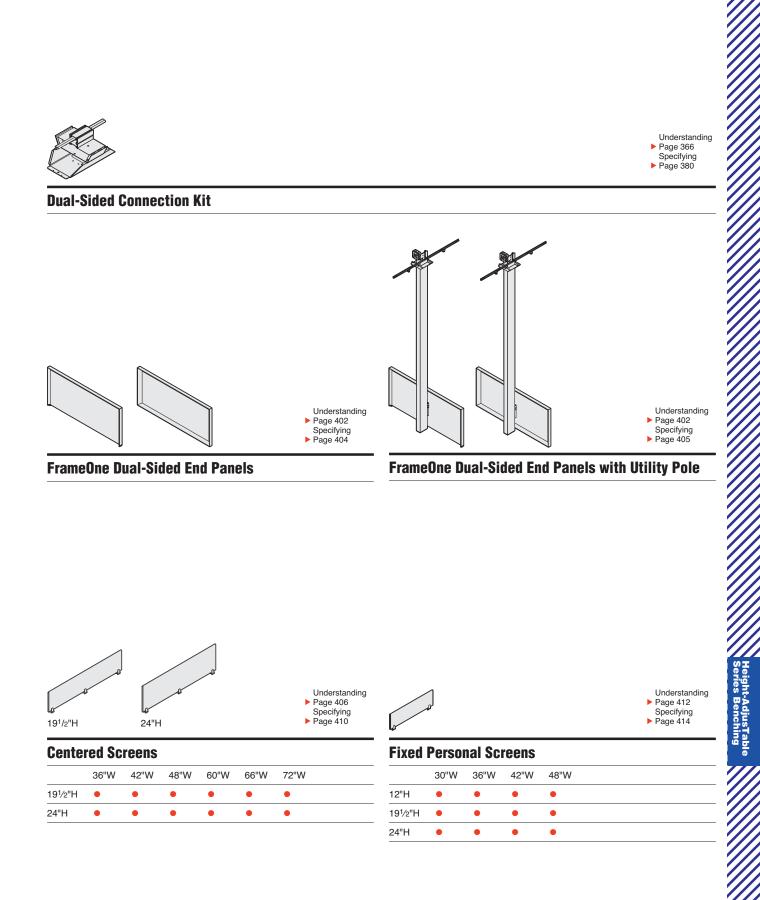


Statement of Line, continued

Base Power



Modular Power Block – Standard-Capacity Understanding Page 420 Specifying Page 426




Modular Power Block – High-Capacity Understanding > Page 420 Specifying > Page 426



Chicago Hardwire Box Understanding Page 421 Specifying Page 426



Duplex Receptacle Understanding Page 421 Specifying Page 427



Flexible Receptacle Understanding Page 421 Specifying Page 428




Filler Package – Power/Data Understanding Page 420 Specifying Page 428



Modular Harnesses Understanding Page 420 Specifying Page 429



Hardwire-to-Modular Power Infeed Understanding Page 424 Specifying Page 430




Modular-to-Modular Power Infeed Understanding Page 424 Specifying Page 430



San Francisco Power Infeed Understanding Page 425 Specifying Page 431




New York Power Infeed Understanding Page 425 Specifying Page 431




Junction Box Faceplate - Modular

Understanding Page 425 Specifying Page 432

Base Power, continued

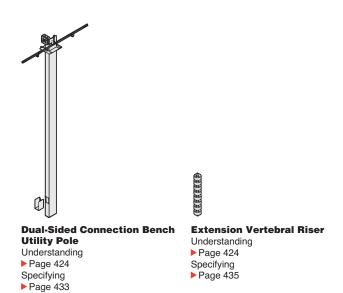

Worksurface Power and Data



Power and Data Strips with Cord and Rail Attachment Brackets Understanding Page 436 Specifying Page 438



Power and Data Strips with Worksurface Attachment Bracket Understanding Page 436 Specifying Page 438



Block-to-Block

Connector

▶ Page 420

Specifying


▶ Page 434

Understanding

Worksurface Power and Data — Power and Data Access Door and Tray Understanding Page 436 Specifying Page 439

l Height-AdjusTable Series Benching

Overview

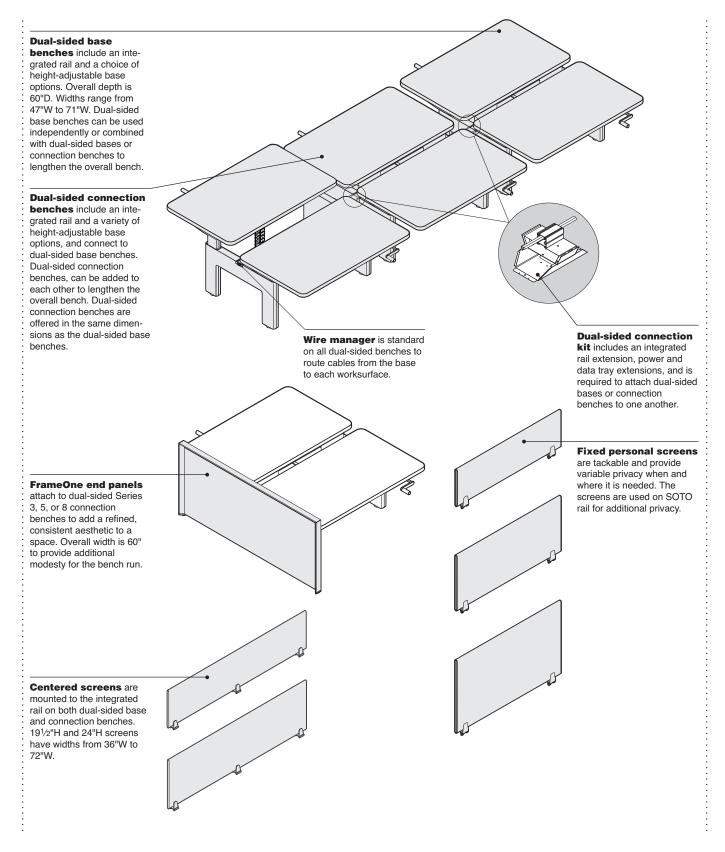


Bench Comparison Chart

Details benching transforms to meet the needs of someone 5' to 6'4" tall. Series benches offer three selections. Series 8 is full of features. Series 5 has fewer options. Series 3 fits your basic needs for seated height-adjustability.

The chart below will help you determine which product line best meets your needs.


Series 3



Seated height-adjustability

Crank handle adjusts height at the rate of four turns per inch. Load-bearing capacity of 205 pounds (including weight of worksurface). Series 5

Sit-to-stand height-adjustability A simple push button delivers electric adjustability at 17/10" per second. Load-bearing capacity of 195 pounds (including weight of worksurface).



Enhanced sit-to-stand heightadjustability

A push button delivers electric adjustability at $1^{7}/10^{\circ}$ per second. Includes three controller options:

Presets

- Digital Presets
- Flush-mount Activation

Load-bearing capacity of 295 pounds (including weight of worksurface).


	Series 3 Seated	Series 5 Sit-to-Stand	Series 8 Enhanced Sit-to-Stand
Range of Adjustment	22" - 34"	25 ¹ /2" - 52"	23 ³ /4" - 49 ³ /4"
Type of Adjustment	Crank	Electric	Electric
Distributed Weight Capacity (includes work- surface weight)	205 lb	195 lb	295 lb
Wire Management Included	Yes	Yes	Yes
Controller	Front-mounted handle	Up/down	Up/Down, Presets, Digital Presets
Obstruction Sensor	No	No	Yes
Motor	N.A.	Exposed	Enclosed
Decibel Rating	N.A.	<50 dBa	<42.5 – 44.1 dBa
Volts	N.A.	120v AC	120v AC
Amps	N.A.	4.0A	3.4 A
Watts	N.A.	480W	400W
Standby Power	N.A.	4.5W	0.1W
Frequency and Phase	N.A.	60 Hz, Single Phase	60 Hz, Single Phase
Adjustability Speed	4 turns/1"	1 ⁷ /10"/sec.	1 ⁷ /10"/sec.
ANSI/BIFMA	Meet or Exceed	Meet or Exceed	Meet or Exceed

Height-AdjusTable Series Benching

Application Guidelines

Four-Pack Dual-Sided Benches


When specifying two- or four-pack benches without FrameOne end panels, base benches are required, regardless of the series.

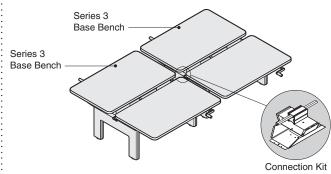


Tip: Open shrouds are standard. Closed shrouds are available as an option. Tip: Connection kits are ordered separately.


Four-Pack Benches with FrameOne End Panel


When specifying two- or four-pack benches with FrameOne end panels, connection benches are required, regardless of the series.

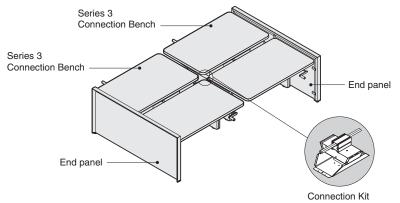


Tip: Open shrouds are required. The closed shrouds option will not work with a FrameOne end panel. Tip: Connection kits are ordered separately.

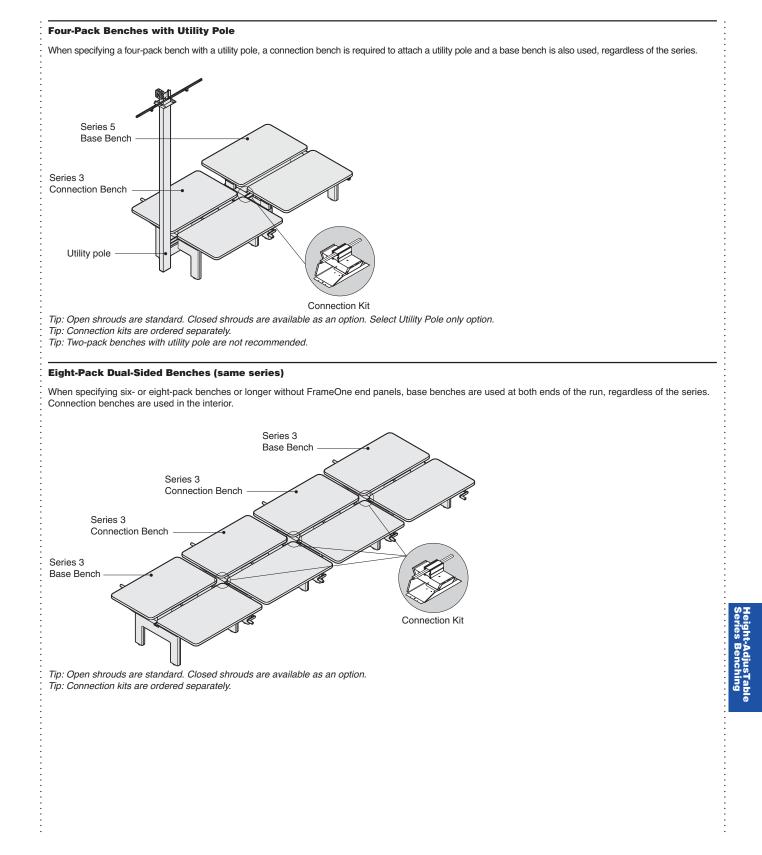

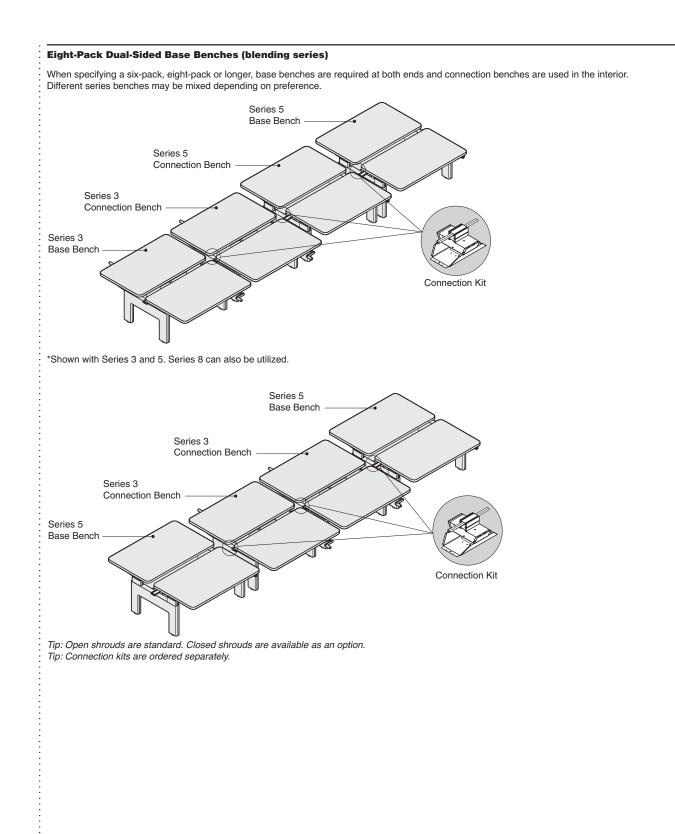


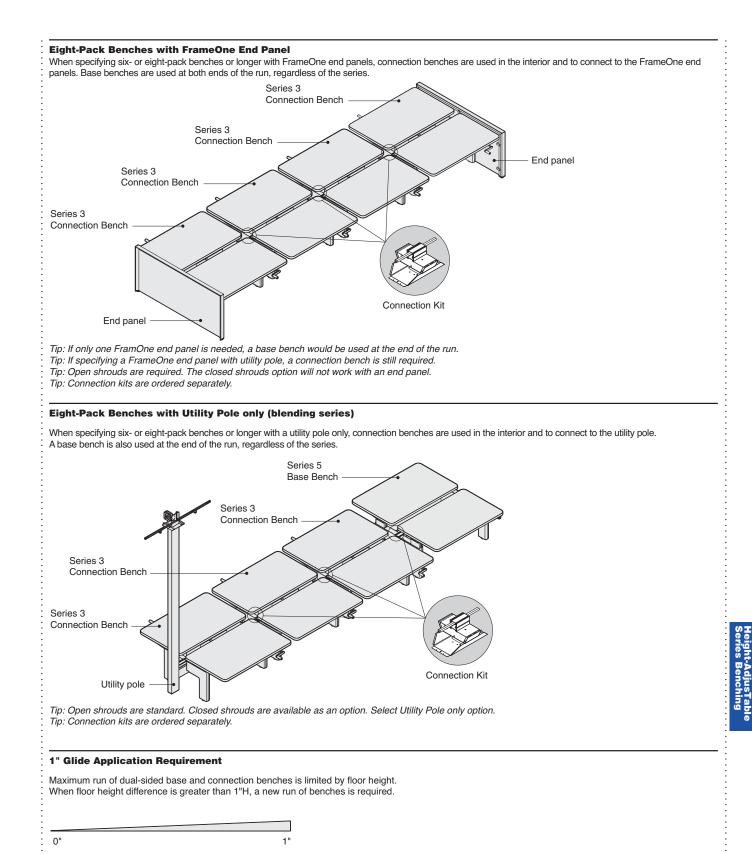


Series 3 Height-AdjusTable Dual-Sided Base and Connection Benches

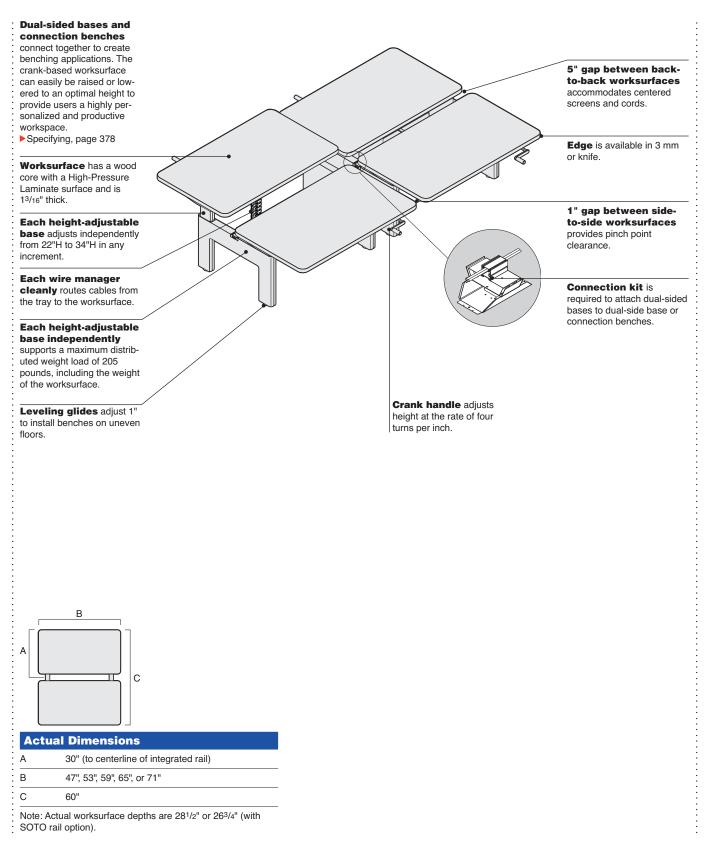



Series 3 Height-AdjusTable Dual-Sided Base and Connection Benches

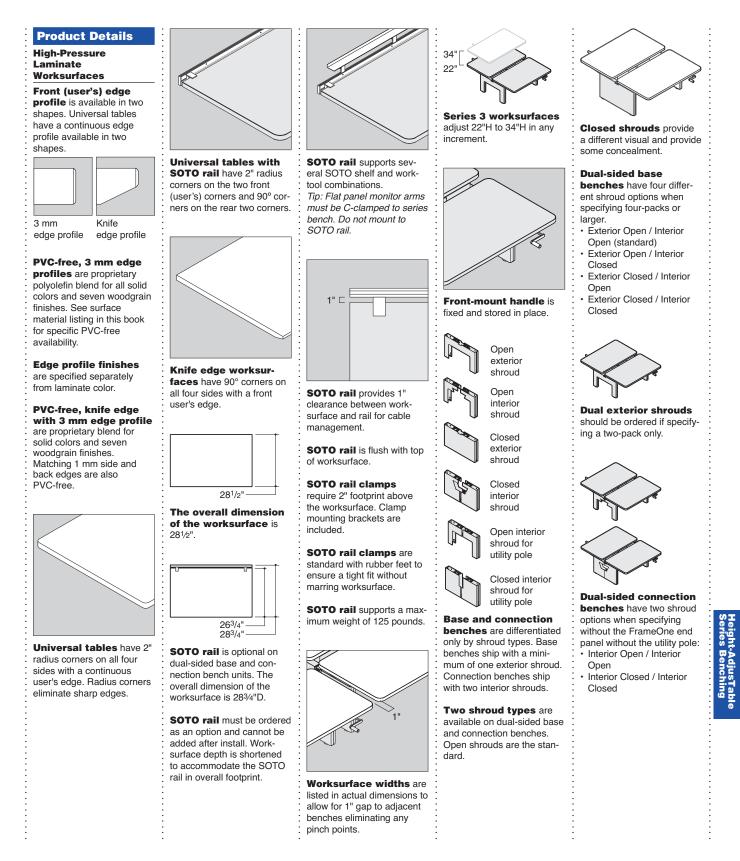

Series 3 Height-AdjusTable Dual-Sided Base and Connection Benches, continued 373

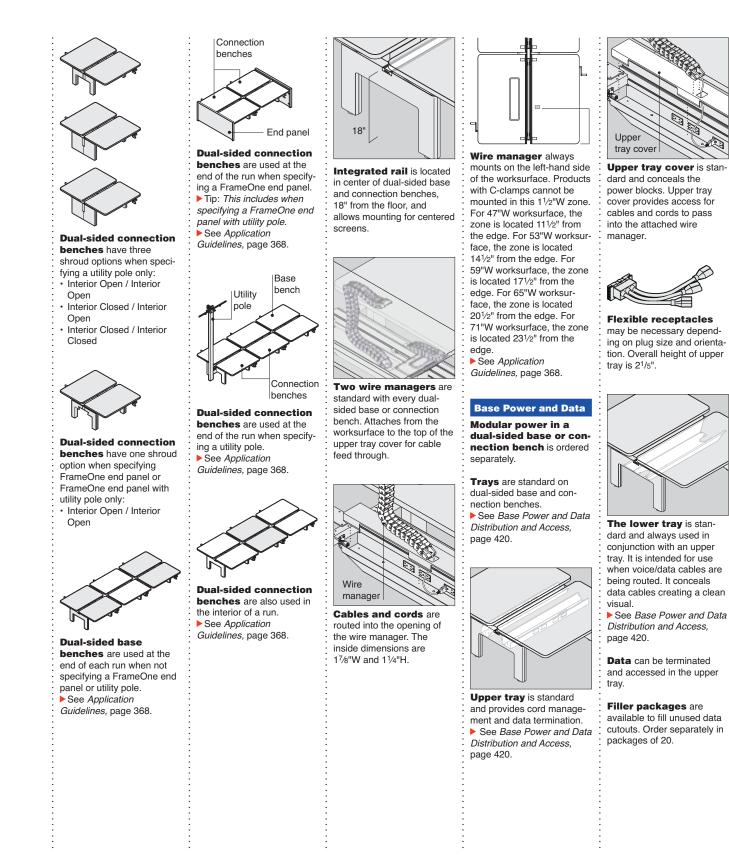

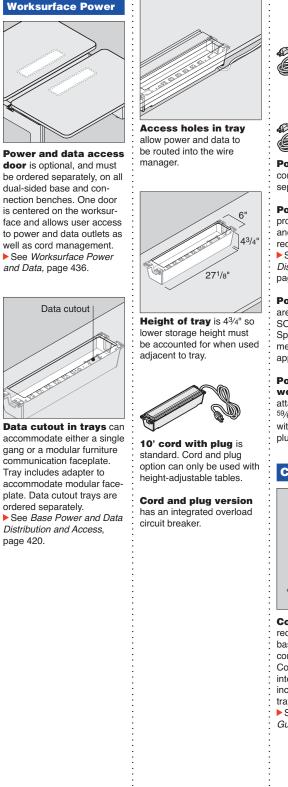



Powerstrips have a 8' cord and are ordered separately.

Power and data strip

provides additional electrical and voice and data receptacles.


See Base Power and Data Distribution and Access, page 420.

Power and data strips


are field-installed on either a SOTO rail or worksurface. Specify appropriate attachment bracket depending on application.

Power and data strip worksurface bracket attaches to worksurfaces ⁵⁹/₆₄" to 15/8" thick. Available with an 8' long cord with plug.

Connections



Connection kit is required to attach dual-sided bases to dual-side bases or connection benches. Connection occurs at the integrated rail (beam) and includes the upper and lower tray to route cables. See Application Guidelines, page 368.




Leveling glides adjust 1" to install on uneven floors.


Maximum run of dualsided base and connection benches is limited by floor height. When floor height difference is greater than 1" a new run needs to start. > See Application

Guidelines, page 368.


Application Topics




Mobile pedestals or other storage taller than 201/2" will impede height range of worksurface.




Storage can nest under the bench. The depth clearance is 23¹/₂" to the upper tray.

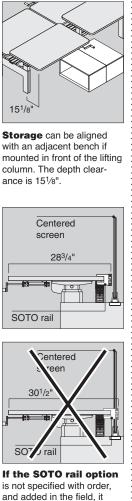

is not specified with order, and added in the field, it cannot be used with centered screens due to lack of clearance.



Acrylic privacy screens cannot be used on dual-sided base or connection benches in combination with centered screens due to lack of clearance.

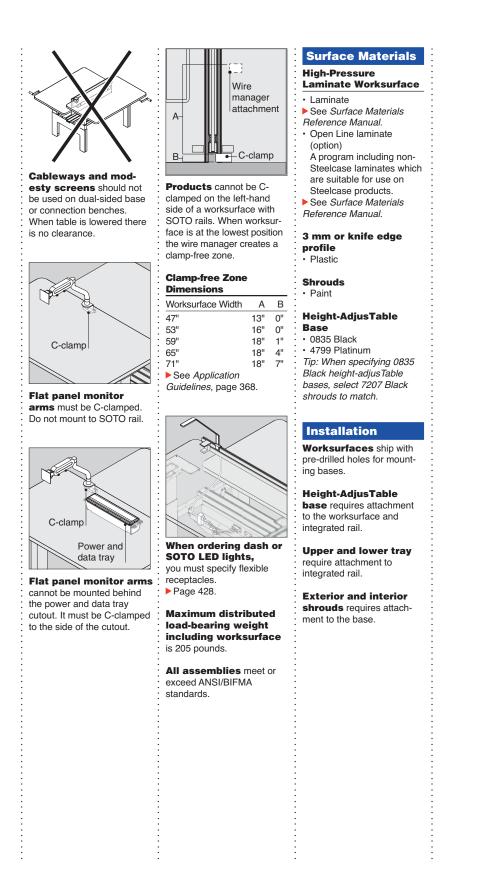

Series 3 Height-AdjusTable Dual-Sided Base and Connection Benches

Series 3 Height-AdjusTable Benches High-Pressure Laminate

		Standard Includes		Required to Specify
Tip: Maximum run of dual- ided base and connection venches is limited by floor reight. When floor height dif- erence is greater than 1"H, a new run of benches is equired. Tip: Maximum distributed pad-bearing capacity is 205 younds per table including worksurface. Tip: Mobile pedestals or other storage taller than 201/2"H will impede he lowest height range of	Need help? Product details, page 372	 High-Pressure Laminate High-Pressure Laminate works: Universal Tables: plastic 3 mr Universal Table with SOTO ration on three sides; 1 mm plastic 0 Knife edge worksurfaces: platified from the edge with matching 1 mi Worksurface corners: Radius corners on Universal 90° corners on knife edge, if s Radius corners on front (user on back of Universal Table bases with the edge the edge that price group 1 Two Height-AdjusTable bases height-tip paint price group 1 Two upper trays, two upper trays and end caps: slate Integrated rail: anodized alumint 1" adjustable glides Two wire managers: black Attachment hardware 	n edge profile on all sides ail: plastic 3 mm edge profile on back stic 3 mm edge profile on m plastic on sides and back Tables, if selected selected 's edge) and 90° corners th SOTO rail, if selected with crank handle: adjustable bases: y covers, lower tray,	 Style number with appropriate edge profile suffix: U Universal Tables K Knife edge High-Pressure Laminate color number for worksurface Plastic color number for profile edge on laminate worksurface Paint color for base: 0835 Black 4799 Platinum Shroud Selections (see below) Paint color number for shroud Options, if selected (see below) See Surface Materials, page 442.
vorksurface.		Options	U.S. Price	Required to Specify
īp: For all edge profiles, add		-		Required to Specify
suffix to the style number.	Surface Materials	High-Pressure LaminateOpen Line laminate	+\$133	See Surface Materials Reference Manual.
(For example, A3BDS4728 becomes A3BDS4728U for Universal table edge profile.)	Materials		plus cost of laminate	
		Shroud		
		Paint price group 1	No cost	Specify paint color number.
		Paint price group 2Paint price group 3	+\$ 28 +\$ 49	Specify paint color number. Specify paint color number.
Tip: Dual-sided base benches are used at the ends of a run. Tip: Dual-sided connection	Base Bench Shrouds	Exterior open/exterior open	No cost	Specify with exterior open and exterior open.
		Exterior closed/exterior closed	+\$154	Specify with exterior closed and exterior closed.
enches are used at the end f run to attach a FrameOne	Base Bench Shrouds	Exterior open/interior open	No cost	Specify with exterior open and interior open.
nd panel or utility pole.	(Four-packs or larger)	Exterior open/interior closed	+\$ 77	Specify with exterior open and interior closed.
ip: Dual-sided connection enches are used in the	or larger,	Exterior closed/interior open	+\$ 77	Specify with exterior closed and interior open.
terior of a run.		Exterior closed/interior closed	+\$154	Specify with exterior closed and interior closed.
	Connection	For use without FrameOn	e end panel or utility p	oole
	Bench Shrouds	Interior open / interior open	No cost	Specify with interior open and interior open.
		Interior closed / interior closed	+\$154	Specify with interior closed and interior closed.
		For use with utility pole o	only	
		Interior open/ interior open	No cost	Specify with interior open and interior open.
		Interior closed/ interior open	+\$ 77	Specify with interior closed and interior open.
		Interior closed/ Interior closed	+\$154	Specify with interior closed and interior closed.
		For use with FrameOne e • Interior open/ interior open	nd panel only or Frame	eOne end panel with utility pole onl Specify with interior open and interior



Options, continued from previous page

Tip: When power tray cutout is specified, power and data access door and tray must be ordered separately. See page 439

Tip: Flat panel monitor arms must be C-clamped to series bench. Do not mount to SOTO rail.

Tip: For all edge profiles, add a suffix to the style number. (*For example, A3BDS4728*) becomes A3BDS4728U for Universal table edge profile.)



	_
	4
	_
• 11 •	53
•	-
\sim	59
	_
	6
	-
	7

K	A CONTRACTOR	
<		

	Options	U.S. Price	Required to Specify
Power Tray Cutout	 Without cutout With cutout 	No cost No cost	Specify without cutout. Specify with cutout.
SOTO Rails	Without SOTO rails	No cost	Specify without SOTO rail.
	 Two SOTO rails for use with 47" worksurface 	+\$466	Specify with SOTO rail.
	 Two SOTO rails for use with 53" worksurface 	+\$490	Specify with SOTO rail.
	 Two SOTO rails for use with 59" worksurface 	+\$514	Specify with SOTO rail.
	 Two SOTO rails for use with 65" worksurface 	+\$540	Specify with SOTO rail.
	Two SOTO rails for use with 71" worksurface	+\$562	Specify with SOTO rail.
Omit Wire Manager	Omit wire manager	-\$152	Specify omit wire manager.

Specification Information

			U.S. Base Price	S	
· Dimensions W D	• Style Number	• Worksurface Weight	Universal Tables	• Knife Edge	
	•		Suffix U	Suffix K	
Dual-Sided	Base Benches	;			

Du

47"	281/2"	A3BDS4728	33 lb	\$3767	\$4011	
53"	281/2"	A3BDS5328	37 lb	\$3896	\$4142	
59"	281/2"	A3BDS5928	42 lb	\$4029	\$4279	
65"	281/2"	A3BDS6528	46 lb	\$4162	\$4416	
71"	281/2"	A3BDS7128	50 lb	\$4299	\$4557	

Dual-Sided Connection Benches

47"	281⁄2"	A3CDS4728	33 lb	\$3767	\$4011	
53"	281⁄2"	A3CDS5328	37 lb	\$3896	\$4142	
59"	281/2"	A3CDS5928	42 lb	\$4029	\$4279	
65"	281/2"	A3CDS6528	46 lb	\$4162	\$4416	
71"	281/2"	A3CDS7128	50 lb	\$4299	\$4557	
:			•			



Dual-Sided Connection Kit




Tip: Must order connection kit when combining two or more benches. For quantity of connection kits required. See Application Guidelines, page 368.

	Standard Includes	Required to Specify
Need help? Product detail page 372	6	Style number
Specifica	ation Information	
• Style Number	· U.S. Price	
ACKDS	\$205	




Series 3 Height-AdjusTable Benches


Series 5 Height-AdjusTable Dual-Sided Base and Connection Benches

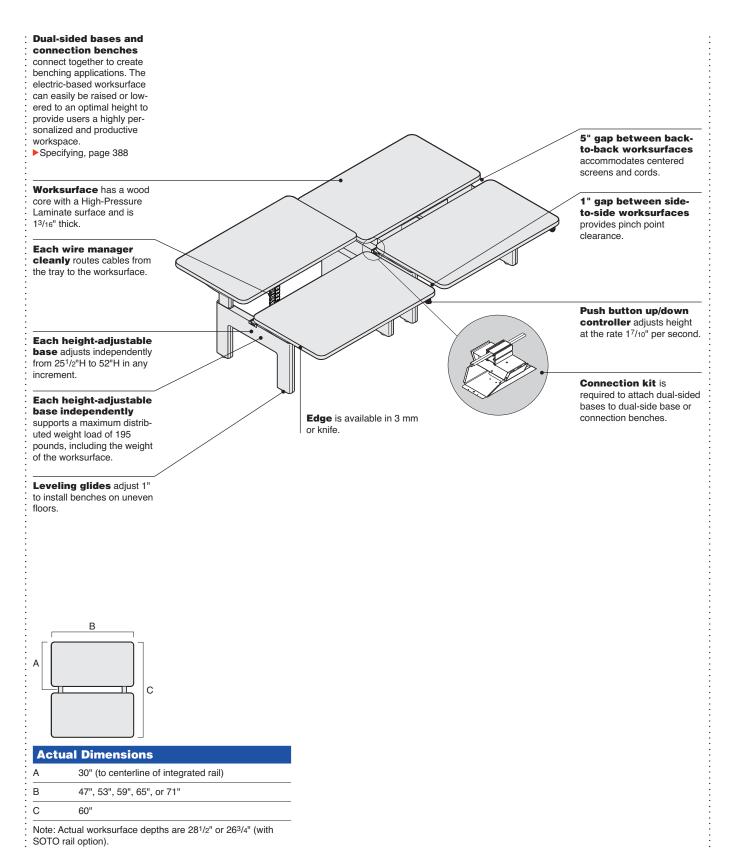


Series 5 Height-AdjusTable Dual-Sided Base and Connection Benches

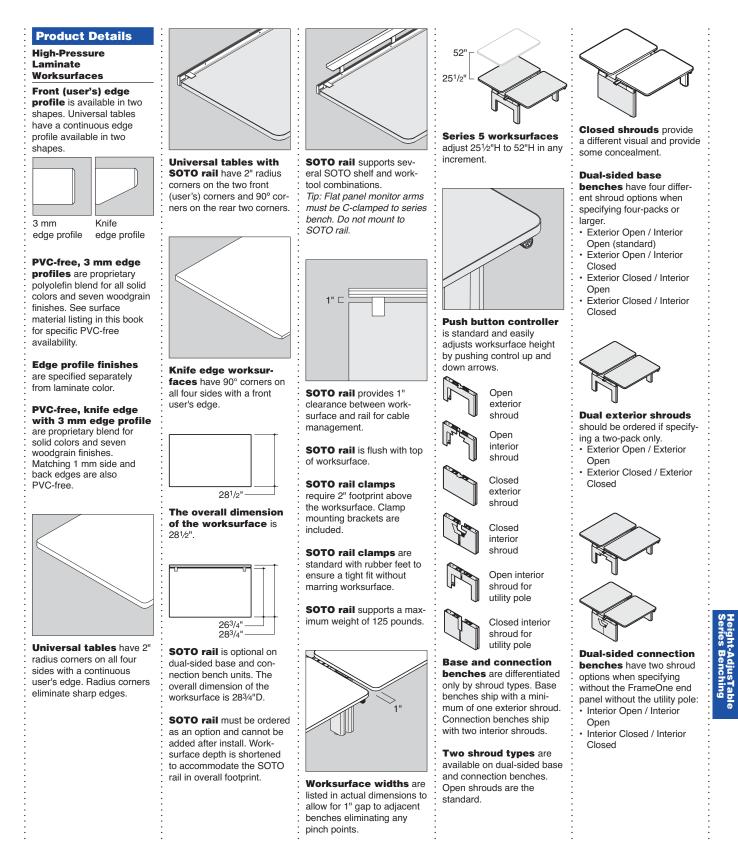


Series 5 Height-AdjusTable Dual-Sided Base and Connection Benches, continued 383

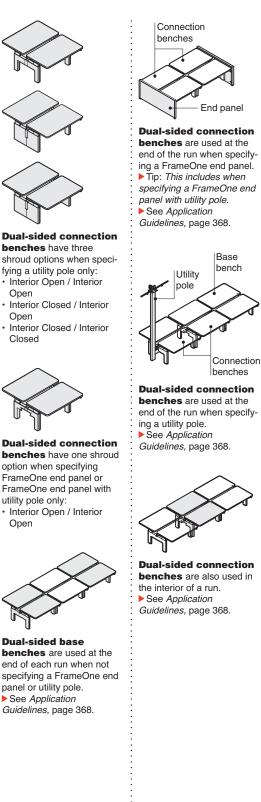




Integrated rail is located in center of dual-sided base and connection benches, 18" from the floor, and allows mounting for centered screens.



Two wire managers are standard with every dualsided base or connection bench. Attaches from the worksurface to the top of the upper tray cover for cable feed through.



Cables and cords are routed into the opening of the wire manager. The inside dimensions are 1⁷/₈"W and 1¹/₄"H.



mounts on the left-hand side of the worksurface. Products with C-clamps cannot be mounted in this 11/2"W zone. For 47"W worksurface, the zone is located 111/2" from the edge. For 53"W worksurface, the zone is located 141/2" from the edge. For 59"W worksurface, the zone is located 171/2" from the edge. For 65"W worksurface, the zone is located 201/2" from the edge. For 71"W worksurface, the zone is located 231/2" from the edae.

See Application Guidelines, page 368.

Wiring and Cabling


Low surge electric motor with whisper quiet operation adjusts at 17/10" per second. Motor is 110V and includes a 9' power cord. Motor also has 4.5W standby power.

Push button up/down controller must be located near the master motor. The master motor can be placed on either the right- or lefthand side of the table.


Base Power and Data

Modular power in a dual-sided base or connection bench is ordered separately.


Trays are standard on dual-sided base and connection benches.
See Base Power and Data Distribution and Access, page 420.



Upper tray is standard and provides cord management and data termination. ► See Base Power and Data Distribution and Access, page 420.



Upper tray cover is standard and conceals the power blocks. Upper tray cover provides access for cables and cords to pass into the attached wire manager.



Flexible receptacles may be necessary depending on plug size and orientation. Overall height of upper tray is 2¹/₅".



The lower tray is standard and always used in conjunction with an upper tray. It is intended for use when voice/data cables are being routed. It conceals data cables creating a clean visual.

See Base Power and Data Distribution and Access, page 420.


Data can be terminated and accessed in the upper tray.

Filler packages are available to fill unused data cutouts. Order separately in packages of 20.

Worksurface Power





Power and data access door is optional, and must be ordered separately, on all dual-sided base connection benches. One door is centered on the worksurface and allows user access to power and data outlets as well as cord management. > See Worksurface Power and Data, page 436.



Data cutout in trays can accommodate either a single gang or a modular furniture communication faceplate. Tray includes adapter to accommodate modular faceplate. Data cutout trays are ordered separately.

See Base Power and Data Distribution and Access, page 420.






Height of tray is 43/4" so lower storage height must be accounted for when used adjacent to tray.



10' cord with plug is standard. Cord and plug option can only be used with height-adjustable tables.

Cord and plug version has an integrated overload circuit breaker.



Powerstrips have a 8' cord and are ordered separately.

Power and data strip


provides additional electrical and voice and data receptacles.

See Worksurface Power and Data, page 436.

Power and data strips are field-installed on either a SOTO rail or worksurface. Specify appropriate attachment bracket depending on application.

Power and data strip worksurface bracket attaches to worksurfaces ⁵⁹/₆₄" to 15/8" thick. Available with an 8' long cord with plug.

Connections




Connection kit is required to attach dual-sided bases to dual-side bases or connection benches. Connection occurs at the integrated rail (beam) and includes the upper and lower tray to route cables. > See Application Guidelines, page 368.




Maximum run of dualsided base and connection benches is
limited by floor height. When
floor height difference is
greater than 1" a new run
needs to start.
See Application

Guidelines, page 368.


Application Topics




Mobile pedestals or other storage taller than 20" will impede height range of worksurface.




Storage can nest under the bench. The depth clearance is 23¹/2" to the upper trav.

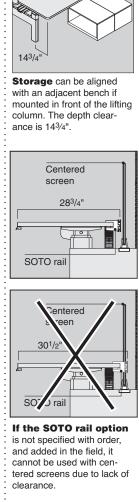



Acrylic privacy screens cannot be used on dual-sided base or connection benches in combination with centered screens due to the lack of clearance.

Details Specification Guide

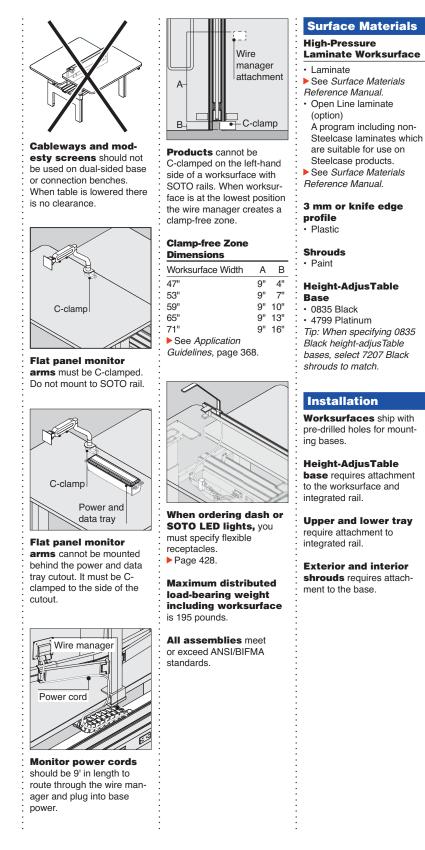

Series 5 Height-AdjusTable Dual-Sided Base and Connection Benches

Series 5 Height-AdjusTable Benches

High-Pressure Laminate

Tip: Maximum run of dualsided base and connection benches is limited by floor height. When floor height difference is greater than 1"H, a new run of benches is required.

Tip: Maximum distributed load-bearing capacity is 195 pounds per table including worksurface.

Tip: Mobile pedestals or other storage taller than 20" will impede the lowest height range of worksurface.

Tip: For all edge profiles, add a suffix to the style number. (For example, A5BDS4728 becomes A5BDS4728U for Universal table edge profile.)

Need help? Product details,	 High-Pressure Laminate 			
page 382	 High-Pressure Laminate work Universal Tables: plastic 3 m Universal Table with SOTO on three sides; 1 mm plastic Knife edge worksurfaces: pl 	nm edge profile on all sides rail: plastic 3 mm edge profile c on back astic 3 mm edge profile on nm plastic on sides and back il Tables, if selected f selected er's edge) and 90° corners with SOTO rail, if selected le sit-to-stand bases: ntrollers t-adjustable bases: ay covers, lower tray,	2 High-Pressure Laminate color number for worksurface	
	Options	U.S. Price	Required to Specify	
Surface Materials	High-Pressure Laminate Open Line laminate 	worksurfaces +\$133 plus cost of laminate	See Surface Materials Reference Manual	
	Shroud Paint price group 1 Paint price group 2 	No cost +\$ 28 +\$ 49	Specify paint color number. Specify paint color number. Specify paint color number.	

		 Shroud Paint price group 1 Paint price group 2 Paint price group 3 	No cost +\$ 28 +\$ 49	Specify paint color number. Specify paint color number. Specify paint color number.
	Base Bench Shrouds (Two-pack only)	 Exterior open/exterior open Exterior closed/exterior closed 	No cost +\$154	Specify with exterior open and exterior open. Specify with exterior closed and
	(Two-pack only)		τφ13 4	exterior closed.
Tip: Dual-sided base benches are used at the	Base Bench Shrouds	Exterior open/interior open	No cost	Specify with exterior open and interior open.
ends of a run.	(Four-packs or larger)	Exterior open/interior closed	+\$ 77	Specify with exterior open and interior closed.
Tip: Dual-sided connection benches are used at the end		Exterior closed/interior open	+\$ 77	Specify with exterior closed and interior open.
of run to attach a FrameOne end panel or utility pole.		Exterior closed/interior closed	+\$154	Specify with exterior closed and interior closed.
Tip: Dual-sided connection	Connection	For use without FrameOn	e end panel or utility p	ole
benches are used in the inte- rior of a run.	Bench Shrouds	Interior open / interior open	No cost	Specify with interior open and interior open.
		Interior closed / interior closed	+\$154	Specify with interior closed and interior closed.
		For use with utility pole o	only	
		Interior open/ interior open	No cost	Specify with interior open and interior open.
		 Interior closed/ interior open 	+\$ 77	Specify with interior closed and interior open.
		 Interior closed/ Interior closed 	+\$154	Specify with interior closed and interior

For Canadian Pricing Multiply U.S. Price by the Canadian price factor. See page 1 for details.

Options, continued on next page

Interior open/ interior open

Specify with interior open and interior

closed.

open.

For use with FrameOne end panel only or FrameOne end panel with utility pole only

No cost

Options, continued from previous page

Tip: When power tray cutout is specified, power and data access door and tray must be ordered separately. See page 439

Tip: Flat panel monitor arms must be C-clamped to series bench. Do not mount to SOTO rail.

Tip: For all edge profiles, add a suffix to the style number. (For example, A5BDS4728 becomes A5BDS4728U for Universal table edge profile.)


	Options	U.S. Price	Required to Specify
Power Tray Cutout	Without cutoutWith cutout	No cost No cost	Specify without cutout. Specify with cutout.
SOTO rails	Without SOTO rails	No cost	Specify without SOTO rail.
	 Two SOTO rails for use with 47" worksurface 	+\$466	Specify with SOTO rail.
	 Two SOTO rails for use with 53" worksurface 	+\$490	Specify with SOTO rail.
	 Two SOTO rails for use with 59" worksurface 	+\$514	Specify with SOTO rail.
	 Two SOTO rails for use with 65" worksurface 	+\$540	Specify with SOTO rail.
	Two SOTO rails for use with 71" worksurface	+\$562	Specify with SOTO rail.
Omit Wire Manager	Omit wire manager	-\$152	Specify omit wire manager.

Specification Information

				U.S. Base Prices		
					\supset	
· Din W	nensions D	• Style Number	Worksurface Weight	• Universal Tables	• Knife Edge	
:			· ·	Suffix U	Suffix K	
Dua	I-Sided I	Base Benches				
47"	28 ¹ /2"	A5BDS4728	33 lb	\$4735	\$4979	
53"	281/2"	A5BDS5328	37 lb	\$4896	\$5144	
59"	28 ¹ /2"	A5BDS5928	42 lb	\$5055	\$5309	
65"	281/2"	A5BDS6528	46 lb	\$5226	\$5480	
71"	28 ¹ /2"	A5BDS7128	50 lb	\$5393	\$5651	
:		:	:	:	:	

Dual-Sided Connection Benches

47"	281/2"	A5CDS4728	33 lb	\$4735	\$4979	
53"	281/2"	A5CDS5328	37 lb	\$4896	\$5144	
59"	281/2"	A5CD\$5928	42 lb	\$5055	\$5309	
65"	281/2"	A5CDS6528	46 lb	\$5226	\$5480	
71"	28 ¹ /2"	A5CDS7128	50 lb	\$5393	\$5651	





Details Specification Guide

Dual-Sided Connection Kit




Tip: Must order connection kit when combining two or more benches. For quantity of connection kits required. > See Application Guidelines, page 368.

	Standard Includes	Required to Specify
Need help? Product detail page 382	8	Style number
Specifica	ation Information	
Style Number	·U.S. Price	
	\$205	
	\$205	




Series 5 Height-AdjusTable Benches


Series 8 Height-AdjusTable Dual-Sided Base and Connection Benches

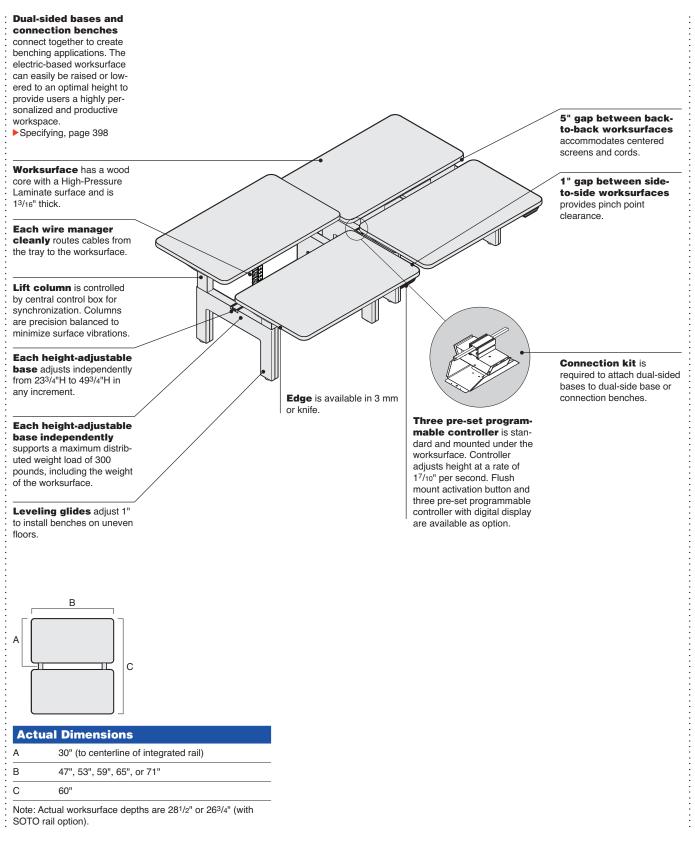


Series 8 Height-AdjusTable Dual-Sided Base and Connection Benches

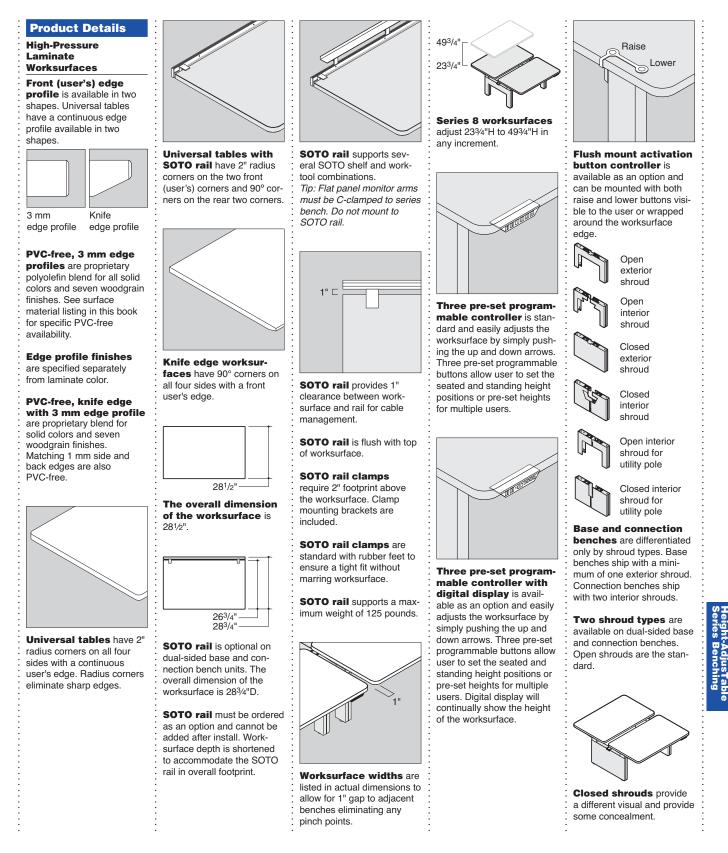


Series 8 Height-AdjusTable Dual-Sided Base and Connection Benches, continued 393

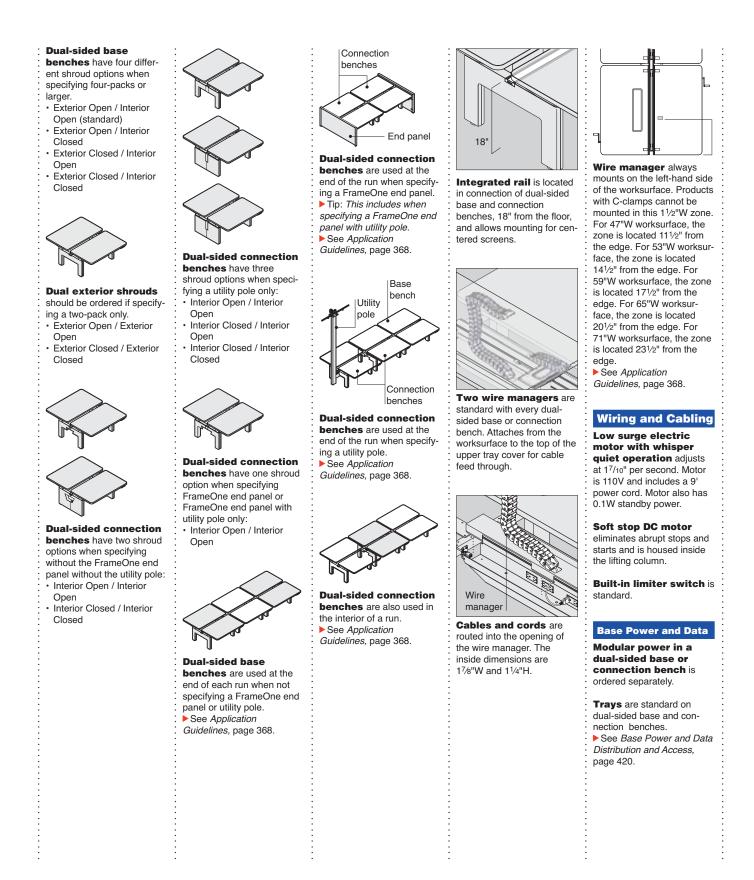


Series 8 Height-AdjusTable Dual-Sided Base and Connection Benches




Upper tray is standard and provides management and data termination. ► See Base Power and Data Distribution and Access, page 420.



Upper tray cover is standard and conceals the power blocks. Upper tray cover provides access for cables and cords to pass into the attached wire manager.



Flexible receptacles may be necessary depending on plug size and orientation. Overall height of upper tray is 2¹/5".




The lower tray is standard and always used in conjunction with an upper tray. It is intended for use when voice/data cables are being routed. It conceals data cables creating a clean visual.

See Base Power and Data Distribution and Access, page 420.


Data can be terminated and accessed in the upper tray.

Filler packages are available to fill unused data cutouts. Order separately in packages of 20.






dual-sided base and connection benches. One door is centered on the worksurface and allows user access to power and data outlets as well as cord management. See Worksurface Power and Data, page 436.




Data cutout in trays can accommodate either a single gang or a modular furniture communication faceplate. Tray includes adapter to accommodate modular faceplate. Data cutout trays are ordered separately.


See Base Power and Data Distribution and Access, page 420.



Access holes in tray allow power and data to be routed straight back.



Height of tray is 4³/4" so lower storage height must be accounted for when used adjacent to tray.








Powerstrips have a 8' cord and are ordered separately.

Power and data strip

provides additional electrical and voice and data receptacles. See Worksurface Power


and Data, page 436.

Power and data strips are field-installed on either a SOTO rail or worksurface. Specify appropriate attachment bracket depending on application.

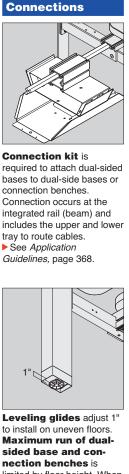

Maximum run of dualsided base and connection benches is limited by floor height. When floor height difference is greater than 1" a new run needs to start. > See Application Guidelines, page 368.

April 2015

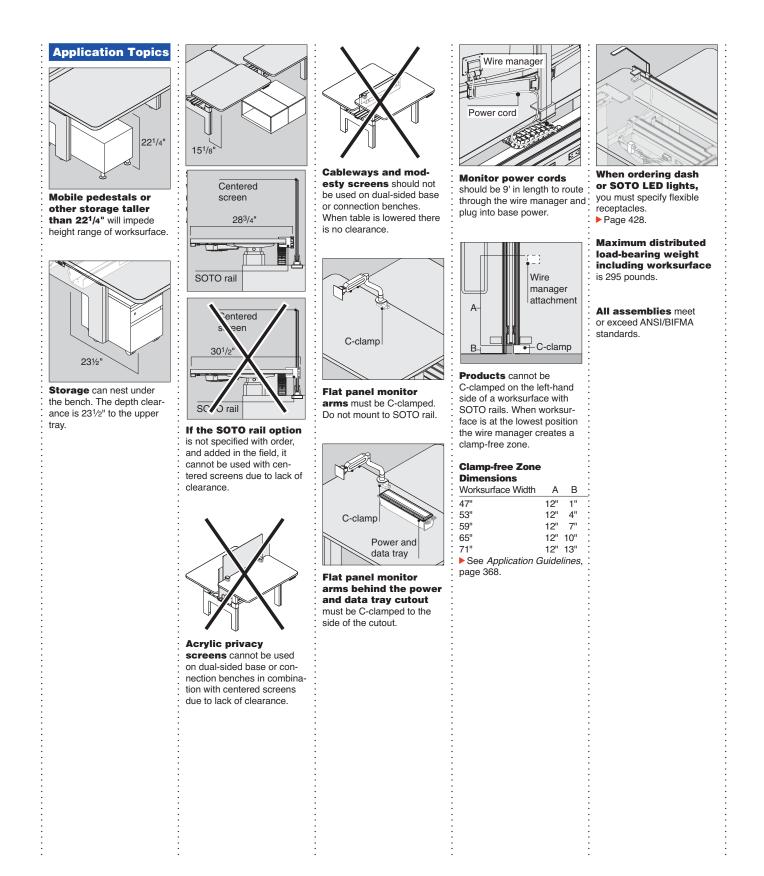

Surface Materials

High-Pressure Laminate Worksurface

 Laminate
 See Surface Materials Reference Manual.

 Open Line laminate (option)
 A program including non-Steelcase laminates which are suitable for use on Steelcase products.
 See Surface Materials Reference Manual.

3 mm or knife edge profile • Plastic

Shrouds

Paint

Height-AdjusTable Base

0835 Black4799 Platinum

Installation

Worksurfaces ship with pre-drilled holes for mount-ing bases.

Height-AdjusTable

base requires attachment to the worksurface and integrated rail.

Upper and lower tray require attachment to integrated rail.

Exterior and interior shrouds requires attachment to the base.

Series 8 Height-AdjusTable Benches High-Pressure Laminate

		Standard Includes		Required to Specify
Tip: Maximum run of dual- ided base and connection penches is limited by floor beight. When floor height dif- erence is greater than 1"H, a new run of benches is equired. Tip: Maximum distributed pad-bearing capacity is 295 pounds per table includ- ing worksurface. Tip: Mobile pedestals or ther storage taller than 221/4"H will impede the powest height of the lowest height range of worksurface.	 Need help? Product details, page 392 	 High-Pressure Laminate High-Pressure Laminate works Universal Tables: plastic 3 mi Universal Table with SOTO rayon three sides; 1 mm plastic on three sides; 1 mm plastic on Knife edge worksurfaces: pla 	m edge profile on all sides ail: plastic 3 mm edge profile on back stic 3 mm edge profile on m plastic on sides and back Tables, if selected selected r's edge) and 90° corners ith SOTO rail, if selected e sit-to-stand bases: adjustable bases: y covers, lower tray, hum	1 Style number with appropriate edge profile suffix: U Universal Tables
0 0				Dominal to Crossite
<i>ip: For all edge profiles, add suffix to the style number.</i>		Options	U.S. Price	Required to Specify
For example, A8BDS4728 pecomes A8BDS4728U for Jniversal table edge profile.)	Surface Materials	 High-Pressure Laminate Open Line laminate 	worksurfaces +\$133 plus cost of laminate	See Surface Materials Reference Manua
0,		Shroud		
		Paint price group 1	No cost	Specify paint color number.
		Paint price group 2	+\$ 28	Specify paint color number.
		 Paint price group 3 	+\$ 49	Specify paint color number.
	Base Bench Shrouds	Exterior open/exterior open	No cost	Specify with exterior open and exterior open.
	(Two-pack only)	Exterior closed/exterior closed	+\$154	Specify with exterior closed and exterior closed.
īp: Dual-sided base enches are used at the	Base Bench Shrouds	Exterior open/interior open	No cost	Specify with exterior open and interior open.
nds of a run.	(Four-packs or larger)	Exterior open/interior closed	+\$ 77	Specify with exterior open and interior closed.
<i>ip: Dual-sided connection</i> <i>enches are used at the end</i>		 Exterior closed/interior open 	+\$ 77	Specify with exterior closed and interior open.
f run to attach a FrameOne nd panel or utility pole.		Exterior closed/interior closed	+\$154	Specify with exterior closed and interior closed.
ip: Dual-sided connection	Connection	For use without FrameOn	e end panel or utility n	ole
enches are used in the inte-	Bench Shrouds	Interior open / interior open	No cost	Specify with interior open and
or of a run.		Interior closed / interior closed	-¢1E1	interior open. Specify with interior closed and
		· Intendi closed / Intendi closed	+9154	interior closed.
		For use with utility pole of	only	
		 Interior open / interior open 	No cost	Specify with interior open and
		Interior closed / interior open	+\$ 77	interior open. Specify with interior closed and interior open.
		Interior closed / interior closed	+\$154	Interior open. Specify with interior closed and interior closed.
<u></u>		For use with FrameOne e	nd panel only or Frame	One end panel with utility pole on

For Canadian Pricing Multiply U.S. Price by the Canadian price factor. See page 1 for details.

Options, continued from previous page

		Options	U.S. Price	Required to Specify
	Controllers	 Two flush mount activation buttons 	No cost	Specify with flush mount activation button controller.
		 Two three pre-set programmable with digital disp 	+\$ 90 blay	Specify with three pre-set digital controller.
Tip: When power tray cutout is specified, power and data access door and tray must be ordered separately. See page 439	Power Tray Cutout	Without cutoutWith cutout	No cost No cost	Specify without cutout. Specify with cutout.
	SOTO Rails	 Without SOTO rails Two SOTO rails for use with 47" worksurface 	No cost +\$466	Specify without SOTO rail. Specify with SOTO rail.
Tip: Flat panel monitor arms must be C-clamped to series		 Two SOTO rails for use with 53" worksurface 	+\$490	Specify with SOTO rail.
Tip: For all edge profiles, add a suffix to the style number. (For example, A8BDS4728 becomes A8BDS4728U for		 Two SOTO rails for use with 59" worksurface 	+\$514	Specify with SOTO rail.
		 Two SOTO rails for use with 65" worksurface 	+\$540	Specify with SOTO rail.
		Two SOTO rails for use with 71" worksurface	+\$562	Specify with SOTO rail.
Universal table edge profile.)	Omit Wire	 Omit wire manager 	-\$152	Specify omit wire manager.


Manager

Specification Information

	U.S. B			Base Prices	
 Dimensions 	• Style	 Worksurface 	• Universal	• Knife	
WD	Number	Weight	Tables	Edge	
			Suffix U	Suffix K	

Dual-Sided Base Benches

47"	281/2"	A8BDS4728	33 lb	\$5961	\$6205	
53"	281/2"	A8BDS5328	37 lb	\$6076	\$6322	
59"	281⁄2"	A8BDS5928	42 lb	\$6189	\$6439	
65"	281⁄2"	A8BDS6528	46 lb	\$6326	\$6580	
71"	28 ¹ /2"	A8BDS7128	50 lb	\$6417	\$6675	



Dual-Sided Connection Benches

47"	281/2"	A8CDS4728	33 lb	\$5961	\$6205	
53"	281/2"	A8CDS5328	37 lb	\$6076	\$6322	
59"	281/2"	A8CDS5928	42 lb	\$6189	\$6439	
65"	281/2"	A8CDS6528	46 lb	\$6326	\$6580	
71"	281⁄2"	A8CDS7128	50 lb	\$6417	\$6675	



Dual-Sided Connection Kit




Tip: Must order connection kit when combining two or more benches. For quantity of connection kits required. See Application Guidelines, page 368.


	Standard Includes	Required to Specify		
 Need help? Integrated rail: anodized aluminum Upper tray and lower tray: slate page 392 		Style number		
Specifica	tion Information			
Style Number	·U.S. Price			
:	:			



Series 8 Height-AdjusTable Benches

FrameOne Dual-Sided End Panels

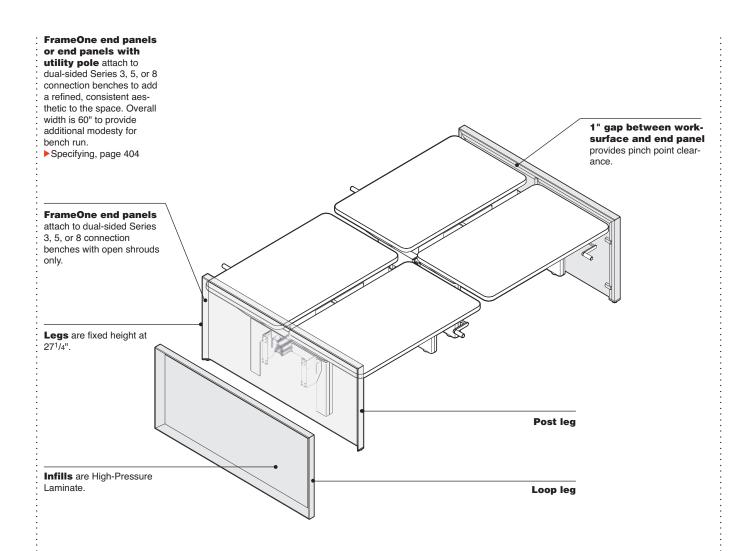

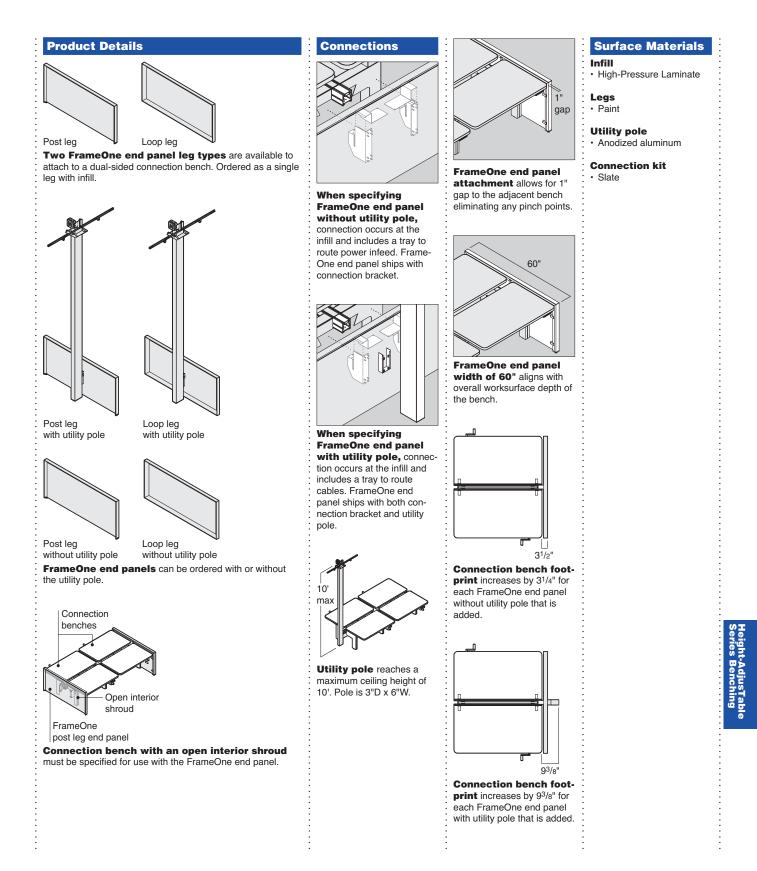

FrameOne Dual-Sided End Panels

Need help?

page 402

Product details,

Standard Includes	
 Infill: High-Pressure Laminate 	

- **Required to Specify**
- 1 Style number 2 Laminate color number for infill
- 3 Paint color number for leg
- 4 Options, if selected (see below) See Surface Materials, page 442.

Tip: Attach to dual-sided Series 3, 5, or 8 connection benches only.

Tip: The connection bench must be specified with open shrouds for the FrameOne end panel to attach.

Tip: Legs are fixed-height at 271/4". ►See page 402





	Options	U.S. Price	Required to Specify
Surface Materials	Laminate Open Line laminate 	+\$67	See Surface Materials, page 442.
	Legs Paint price group 1 Paint price group 2 Paint price group 3	No cost +\$28 +\$49	Specify paint color number. Specify paint color number. Specify paint color number.

Specifi	Specification Information			
Dimensio W H		•U.S. Base Price		
With Po	net I an			

With Post Leg

60"	271/4"	AFEPPDS	\$1327
•			•

With Loop Leg

60"	' 27 ¹ /4"	AFEPLDS	\$1567	

Leg: paint

 Connection kit: slate · Brackets and caps



FrameOne Dual-Sided End Panels with Utility Pole

		Standard Includes	;	Required to Specify
Tip: Attach to dual-sided Series 3, 5, or 8 connection benches only.	Need help? Product details, page 403	 Infill: High-Pressure Lamin Leg: paint Utility pole: anodized alum Connection kit: slate Ceiling kit Brackets and caps Mounting brackets 		1 Style number 2 Laminate color number for infill 3 Paint color number for leg 4 Options, if selected (see below) ▶ See <i>Surface Materials</i> , page 442.
Tip: The connection bench		Options	U.S. Price	Required to Specify
must be specified with open shrouds for the FrameOne end panel to attach.	Surface Materials	Laminate Open Line laminate 	+\$67	See Surface Materials, page 442.
Tip: Legs are fixed-height at 271/4".		Legs Paint price group 1 Paint price group 2 	No cost +\$28	Specify paint color number. Specify paint color number.
Tip: Infeed is ordered separately.		Paint price group 3	+\$49	Specify paint color number.
See page 430	Specificatio	n Information		
Tip: Utility pole reaches a maximum ceiling height of 10'. Pole is 3"D x 6"W.	• Dimensions W H	• Style Number	•U.S. Base Price	
Tip: Utility pole can be speci- fied without the end panel. ▶See page 433				
	With Post Le	g		

		-				
>	60"	271/4"	AFEPPUPDS	\$2257		




60"

27¹/4" **AFEPLUPDS** \$2497


Details Specification Guide

Centered Screens

	Centered scree vide a boundary ele along the bench. T available in two he accommodate vary of privacy. Specifying, page	ement hey are ights to ing levels
	Actual Dime	nsions
	Height	18½" or 23"
:	Overall Height	19½" or 24"
-	Width	36", 42", 48", 60", 66", or 72"
	to the top of the sc	is measured from top of mounting surface reen. kit can accommodate inserts that are 1⁄4",



mounted to the integrated rail. The 191/2"H screen has an overall height of 371/2"H from the floor and a 24"H screen has an overall height of 42"H from the floor.




Centered screens with fabric infill are tackable and available in 191/2"H and 24"H. Screens range in size from 36"W to 72"W. Frosted glass is also available in 19¹/2"H and widths from 36"W to 72"W.



Brackets are included with screens. Two brackets are used on 36"W and 48"W screens. All other widths require three brackets.


Centered screen custom insert kit

allows for use of other infill materials. 36"W and 48"W screens require the two bracket kit. Screens 60"W to 72"W require the three bracket kit. Infill should not exceed 181/2" in height.

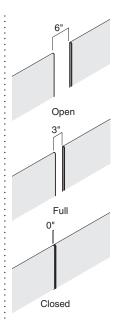


Centered screens will have a minimum 3" gap at the end of the bench run. The integrated rail does not run the full worksurface width. Refer to the Series Bench Centered Screen Compatibility Chart for recommendation on screen sizes to achieve the open, full, or closed condition.

When specifying a base bench, screen must be 6" to 12" shorter than worksurface.



When fabric screens are placed directly adjacent to each other, a small aligner can be placed in between the screens at the top to connect them for planar alignment. Aligners are ordered separately in packages of 10.








pattern is recommended when using a COM fabric to provide a consistent visual. Fabric with patterns could result in the above visual.


Series Bench Center Screens Compatibility Charts

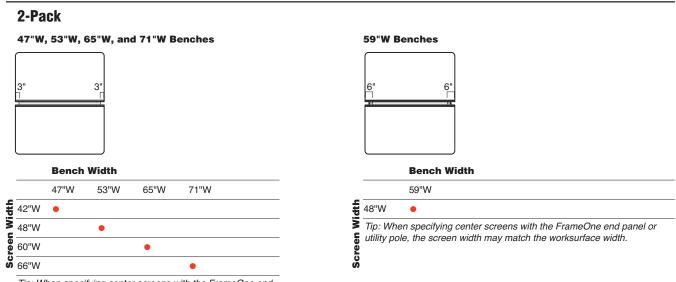

Tip: When specifying center screens with the FrameOne end panel or utility pole, the screen width may match the worksurface width.

4-Pack


47"W, 53"W, 65"W, and 71"W Benches



Bench Width

		47"W	53"W	65"W	71"W	
Screen Width	42"W	•				
	48"W		•			
	60"W			•		
Sc	66"W				•	

Tip: Center screens can be placed for 0"W or 6"W center gap. Tip: When specifying center screens with the FrameOne end panel or utility pole, the screen width may match the worksurface width.

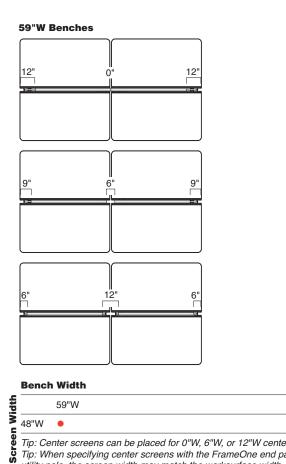

Tip: Center screens can be placed for 0"W, 6"W, or 12"W center gap. Tip: When specifying center screens with the FrameOne end panel or utility pole, the screen width may match the worksurface width.


6-Pack


47"W, 53"W, 65"W, and 71"W Benches

5" smaller screen width than table	Same size screen width as table	5" smaller screen width than table
6" C)" () [)" 6"
3"	3"	3" 3"
5" smaller screen width than table	5" smaller screen width than table	5" smaller screen width than table
6" 3	2"	6"

3" □	6"	6"	3"

Tip: When specifying center screens with the FrameOne end panel or utility pole, the screen width may match the worksurface width.

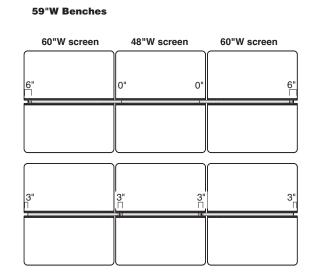

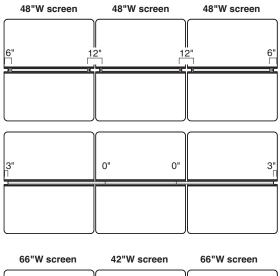

6" 0"	0" 6"

Tip: When specifying center screens with the FrameOne end panel or utility pole, the screen width may match the worksurface width.

409

Centered Screens

▶ Need help?

page 406

Product details,

Tip: When specifying a twopack bench, screen must be 6" to 12" shorter then worksurface.

Tip: When using COM fabric, it is recommended that non-patterned fabric be

Tip: 36"W and 48"W screens come with two brackets. 60"W to 72"W screens come with three brackets.

used.

19¹/2"H

24"H

Standard Includes

- Screen: fabric price group 1
 Brackets: 4799 Platinum

- **Required to Specify**
- 1 Style number

N.A.

N.A.

N.A.

- 2 Fabric color number for screen
- 3 Options, if selected (see below)
- See Surface Materials, page 442.

	Option	ıs	U.S. Pri	ce	Required to Specify
Surface Materials	 Fabric pr Fabric pr Fabric pr 	ice group 1 ice group 2 ice group 3 ice group 4 r's Own Material	19¹/2"H No cost +\$ 33 +\$ 87 +\$111 +\$ 16	24"H No cost +\$ 39 +\$111 +\$136 +\$ 16	 Specify fabric color number. Specify fabric color number. Specify fabric color number. Specify fabric color number. See Surface Materials Reference Manual to specify.
	Glass • Clear gla • Frosted g		Prices below Prices below		Specify with 6570 Crystal glass. Specify with 6530 Frosted glass.
Specific	ation Informa	tion			
Width	• Style Number	•U.S. Base Price	• Options (Add \$ to Base	e Price)	
	· · · · · · · · · · · · · · · · · · ·		Clear Glass		Frosted Glass
19½"H S	creens				
36"	CQSC3619	\$423	+\$80		+\$201
42"	CQSC4219	\$441	+\$97		+\$231
48"	FMSC4819	\$460	N.A.		+\$407
60"	FMSC6019	\$494	N.A.		+\$463
66"	FMSC6619	\$512	N.A.		+\$502
72" :	FMSC7219	\$529 :	N.A.		+\$540
24"H Scr	eens				
36"	CQSC3624	\$546	N.A.		N.A.
42"	CQSC4224	\$566	N.A.		N.A.
48"	FMSC4824	\$582	N.A.		N.A.
		**			

72" FMSC7224 \$652 N.A.

\$617

\$634

N.A.

N.A.

FMSC6024

FMSC6624

60"

66"

*Products on this page are c:scape and FrameOne. They are here to simplify your planning. Remember that Steelcase has different pricing terms. They are ordered through FrameOne (SFM) or c:scape (SCX) electronic catalog.



Centered Screen Custom Insert Kits and Aligners

Centered Screen Custom Insert Kits

		Standard Includes	Required to Specify
Tip: FMSK2 is for use with screens up to 48"W.	Need help? Product details, page 406	 Brackets: 4799 Platinum Plastic adapter for 1/4" screen Plastic adapter for 3/8" screen 	Style number
Tip: FMSK3 is for use with screens wider than 48"W.	F0	 Plastic adapter for 1/2" screen Plastic adapter for fabric infill screen Attachment hardware 	
Tip: These kits are available to accommodate additional			

Tip: These kits are available to accommodate additional materials for centered screens. Infills can be 181/2"H or less. For actual dimensions of centered screens, see page 406

Tip: Custom insert kit can accommodate inserts that are 1/4", 3/8", or 1/2" thick.

Tip: To order a fusion screen, contact your Designtex representative.





Specifi	Specification Information						
Style Number	·U.S. Price						
Two Bra	ckets						
FMSK2	\$114 :						
Three B	rackets						
FMSK3	\$132						

Aligners

	Standard Includes	Required to Specify
Need help? Product details, page 407	Aligner, package of 10: translucent plastic	Style number

Specification Information

·U.S. Price

\$22

• Style

FMAS

Number

Tip: Aligners are for use with fabric screens only.


*Products on this page are FrameOne. They are here to simplify your planning. Remember that Steelcase has different pricing terms. They are ordered through FrameOne electronic catalog (SFM).



For Canadian Pricing Multiply U.S. Price by the Canadian price factor. ► See page 1 for details.

Details Specification Guide

Fixed Personal Screens

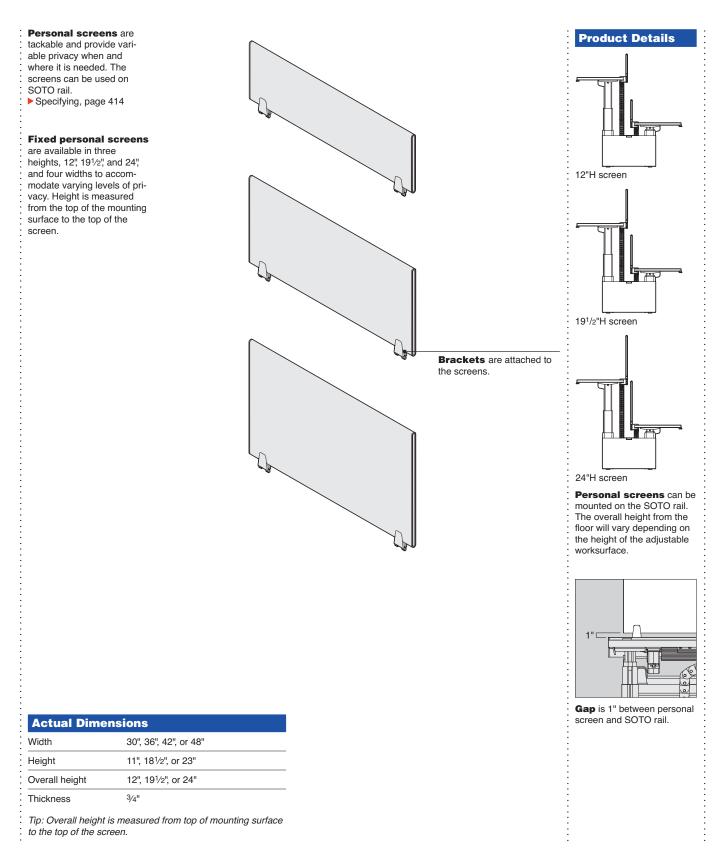



Fabric

Brackets


4799 Platinum paint



Fabric without pattern is recommended when using a COM fabric to provide a consistent visual. Fabric with patterns could result in the above visual.



When mounting the dash LED light to SOTO rail, it must be mounted adjacent to the personal screen. dash cannot be mounted in front of screen.



Fixed personal screens should not be used on dualsided base or connection benches, when table is lowered due to lack of clearance.

> Height-AdjusTable Series Benching

Fixed Personal Screens

► Need help?

page 412

Product details,

Standard Includes

· Brackets: 4799 Platinum

Personal screens: fabric price group 1

Required to Specify

1 Style number


2 Fabric color number for screen


3 Options, if selected (see below)
See Surface Materials, page 442.

	Options	U.S. Price		•	Required to Specify	
Surface	Fabric	12"H	19½"H	24"H		
Materials	 Fabric price group 1 Fabric price group 2 Fabric price group 3 Fabric price group 4 Customer's Own Material (COM) 	No cost +\$24 +\$64 +\$83 +\$16	No cost +\$ 33 +\$ 87 +\$111 +\$ 16	No cost +\$ 39 +\$111 +\$136 +\$ 16	Specify fabric color number. Specify fabric color number. Specify fabric color number. Specify fabric color number. See Surface Materials Reference Manual.	

Tip: When using COM fab-ric, it is recommended that non-patterned fabric be used to provide a consistent visual between adjacent screens, and from one side to the other.








*Products on this page are c:scape. They are here to simplify your planning. Remember that Steelcase has different pricing terms. They are ordered through c:scape electronic catalog (SCX).


Specifica	Specification Information						
·Width	• Style Number	U.S. Base Price					
12"H Scre	ens						
30"	CQSF3012	\$162					
36"	CQSF3612	\$189					
42"	CQSF4212	\$214					
48"	CQSF4812	\$241					
- 19 ¹ ⁄2"H Si	creens						
30"	CQSF3019	\$250					
36"	CQSF3619	\$277					
42"	CQSF4219	\$303					
48"	CQSF4819	\$329					
	•						
24"H Scre	ens						
30"	CQSF3024	\$337					

30"	CQSF3024	\$337
36"	CQSF3624	\$365
42"	CQSF4224	\$390
48"	CQSF4824	\$417
:	:	


Power and Data Wiring Schematics

Details for the Electrician

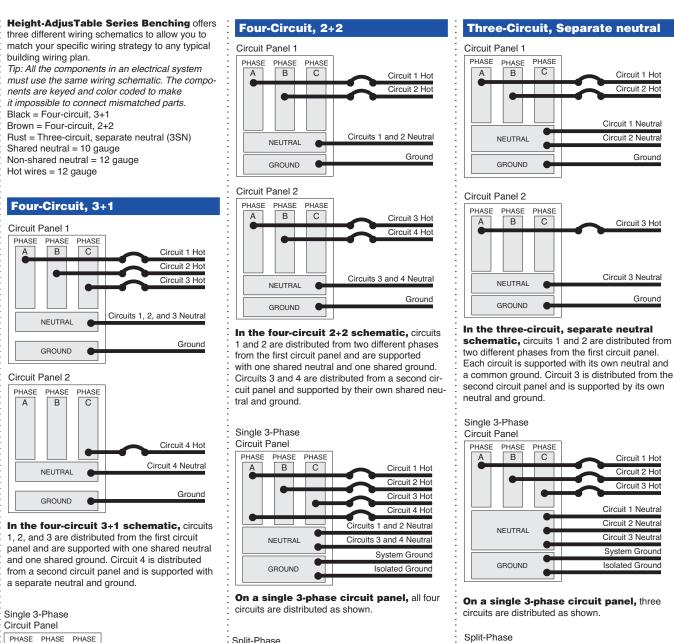




On a single 3-phase circuit panel, all four circuits are distributed as shown.



On a split-phase circuit panel, all four circuits are distributed as shown.

Height-AdjusTable Series Benching



On a split-phase circuit panel, three circuits are distributed as shown


Power and Data How to Calculate Power Needs

Use This to Determine How Many Power-Ins You Will Need

: When planning a power	: If your usage is not	ː If your usage is known	: Requirements of Office	e Equipment in Amps
: network, you must calculate	known in advance:	; in advance:	General Equipment	
the amperage requirements	: The National Electrical	Add up the amperage used		
: of all your electrical compo-	Code (NEC) allows a maxi-	: by each piece of equipment	(Typical Amperage)	0.05
: nents so you can provide	: mum of 13 receptacles on	: in the workstation. When-	A.C. adapter	0.05
: sufficient electricity to power	: each 20-amp circuit. This	: ever you reach 60-amps	Adding machine	0.05
: them.	: provides up to 30 receptacles	: (20-amps times 3 circuits) or	Answering machine	0.08
:	for each 3-circuit power-in	: 80-amps (20-amps times 4	· Calculator	0.025
:	and 40 receptacles for each	circuits) from items that are	· Clock	0.03
:	: 4-circuit power-in.	likely to be used at the same	Coffee pot	10.00
:	:	time, you have reached the	Copy machine	15.00
-	Most electrical engineers	ilimit for a single power-in.	 Desk-top copiers 	7.00 to 10.00
:	write their specifications	Specify another power-in	Electric eraser	0.25
:	more conservatively than the	and continue until all equip-	: Fan	0.50
:	NEC. Consult the project	ment is powered.	Manuscript holder	0.75
:	electrical engineer.		Microwave	8.00 to 12.00
:	·	If the circuits will normally	· Pencil sharpener	0.25
:	These numbers refer to	be subject to a continuous	Radio	0.05
:	receptacles, not outlets.	: load (three or more hours of	Space heater, 1000 watts	8.50
:			Space heater, 1500 watts	12.50
:	: All receptacles are duplex	: continuous use, such as	 Stand-alone copiers 	15.00
:	and include two outlets.	: lights or computers), the	:	10.00
÷	÷	NEC requires that circuit	Electronic Equipment	
•	•	: capacity be "de-rated" by	(Typical Amperage)	
•	•	20 percent. Therefore, treat		
:	:	: circuits used for continuous	Desk-top memory	0.0010.045
:	:	: loads as if they were rated	storage devices	0.08 to 0.15
:	:	: at 16-amps instead of the	· Desk-top printers	1.20 to 2.00
:	•	: regular 20-amps.	· DVD players	0.13 to 0.20
:	:	:	· Flat-panel screens	3.50
•	:	: Try to anticipate future	Laptops	3.50 to 5.00
-	-	increases in power require-	Modems	0.15
:	:	ments and build some	 Stand-alone printers 	1.50 to 2.50
:	:	excess capacity into your	· VDTs and PCs	0.08 to 4.80
:	:	plan.	•	
:	:	See table at right for typi-	Details Height-AdjusTa	able Worksurfaces
:	:	cal and actual amperage	(Actual Amperage)	
•	:	: usages for components.	· Series 5	4.0
:	:	· usages for components.	Series 8	3.4
:	:	To calculate amperage when	:	0.1
:	:			
:	:	the wattage of a device is		
:	:	known, divide watts by 120.	:	
:	:			
:	:	Some appliances, such as		
-	-	large copiers, coffee makers,	•	
:	:	: or space heaters require		
:	:	: most of the current avail-		
:	:	: able on a 20-amp circuit. It		
:	:	: is recommended that such	•	
:	:	: devices be supplied with	•	
:	:	their own receptacle/circuit,		
:	:	: directly from the building.	:	
:	:	: This leaves the capacity of		
:	:	the furniture circuits avail-		
:	:	: able for the more dynamic		
÷	÷	requirements of the office		
-	-	equipment.	•	
:	:			
:	:	Local electrical codes vary.	•	
:	:	Consult a qualified electrical	•	
:	:	contractor or engineer for	•	
:	:	the proper planning of elec-	:	
:		trical circuits in your locale.		
:	:	· · · · · · · · · · · · · · · · · · ·	•	
:	:			
:	:	:	:	
:	:	:	:	
:	:	:	:	
-		•	•	
•	•	•	•	
:	:			
:	:	:	:	
:	:	:	:	
•	•	•	•	

Power and Data How to Calculate Power Needs

Base Power and Data Cable Capacities

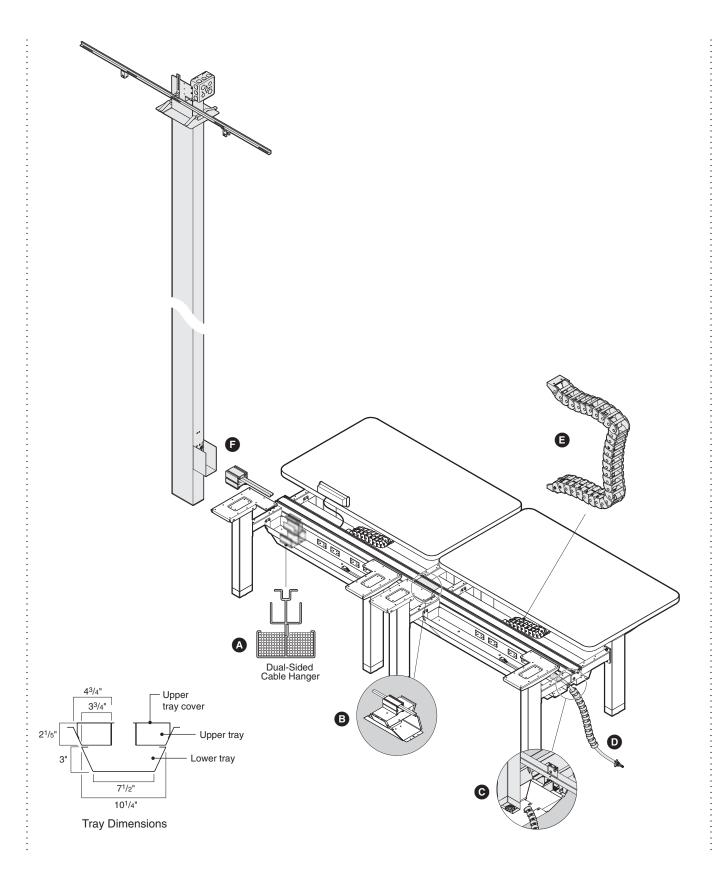


		Outside Diameter of Cable = .223 (5E)		Outside Diameter of Cable = .310 (6A)	
	Maximum Capacity	Maximum Capacity with Power	Maximum Capacity	Maximum Capacity with Power	
Cable hanger, dual-sided unit	96	N.A.	48	N.A.	
Connection kit	96	88	48	44	
O Infeed opening at ends of lower tray, dual-sided unit	96	88	48	44	
O Vertebral riser	48	40	24	20	
🕽 Wire manager	30	20	14	7	
Dual-sided utility pole	96	88	48	44	

Note: Cable hangers have a separate routing area for power. Capacity is not affected. Note: The TIA recommends a maximum fill rate of 40%. Note: When routing cables through any combination mentioned above, the capacity is equal to the smallest number. Note: On 47"W benches, data opening is positioned to the right.


:

Base Power and Data Distribution and Access

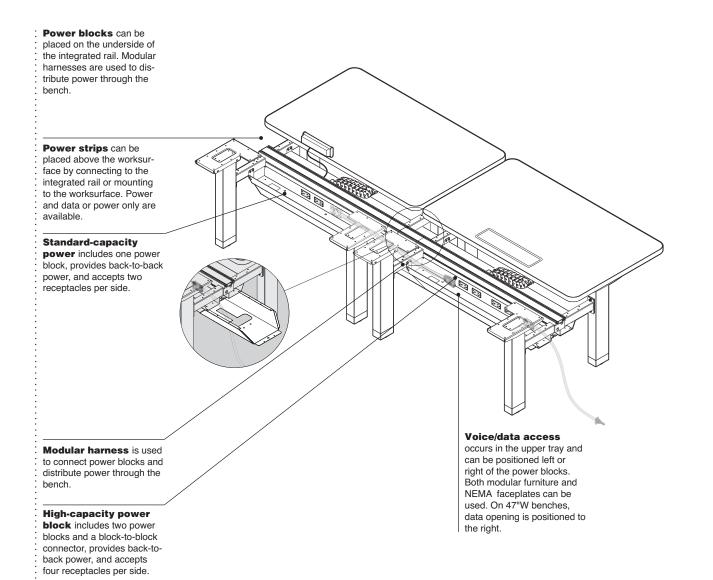



Standard-capacity power includes one power block, provides back-to-back power, and accepts two receptacles per side.



High-capacity power includes two power blocks and a block-to-block connector. It provides back-to-back power, and accepts four receptacles per side.



Chicago hardwire box is available. It accommodates two receptacles per side.



Duplex receptacles are available in 15- and 20amps, isolated or system ground, with multiple line options. Receptacles have two outlets and are ordered separately.



Modular flexible receptacles are available in 15amp, isolated or system ground, with multiple line options. Flexible receptacles offer easy access to three outlets. Receptacles are ordered separately. *Tip: Specify a flexible receptacle ordering a dash or SOTO LED light.*



Modular harnesses are used to connect power blocks.

See Base Power and Data Power Routing Harness Chart, page 422 to determine lengths needed. Uppe

manager.

tray is 21/5".

tray cover

Upper tray cover is

standard and conceals the

power blocks. Upper tray

cover provides access for

cables and cords to pass through the attached wire

Flexible receptacles

may be necessary depend-

ing on plug size and orienta-

tion. Overall height of upper

The lower tray is standard and is always used in conjunction with an upper


tray. It is intended for use

being routed. It conceals

visual


when voice/data cables are

data cables, creating a clean



Data can be terminated and accessed in the upper tray either left or right of the power. Exception: On 47"W benches, data opening is positioned to the right. Both modular furniture and NEMA faceplates can be used.

Cable hangers attach to the underside of the integrated rail to manage the routing of voice/data cables. They are included with all dual-sided base and connection benches.



Upper tray is standard and provides cord management and data termination.

Extension vertebral riser can be used to conceal conduit and cables along the floor. Length is 15". Risers can be linked to each other for longer length requirements.



Block-to-block connector is included with highcapacity power. It can also be ordered separately, along with another power block, to convert standard-capacity power to high-capacity.

Filler packages are available to fill unused power or data options. Order separately in packages of 20.

Three wiring schematics are available - 3+1, 2+2,

and three circuits with separate neutrals (3SN). All the components in an electrical distribution system must use the same wiring schematic. For safety, the components are keyed, labeled, and color-coded to make it impossible to connect mismatched parts.

All electrical components are cULus listed to the appropriate industry standards in accordance with the National and Canadian Electrical code.

Local electrical codes vary. Consult a qualified electrical contractor or engineer for the proper installation of all electrical components.


Application Topics



When ordering dash or SOTO LED lights, you must specify flexible receptacles. Page 428. leight-AdjusTable eries Benching


Base Power and Data Power Routing Harness Chart

Bench to Bench

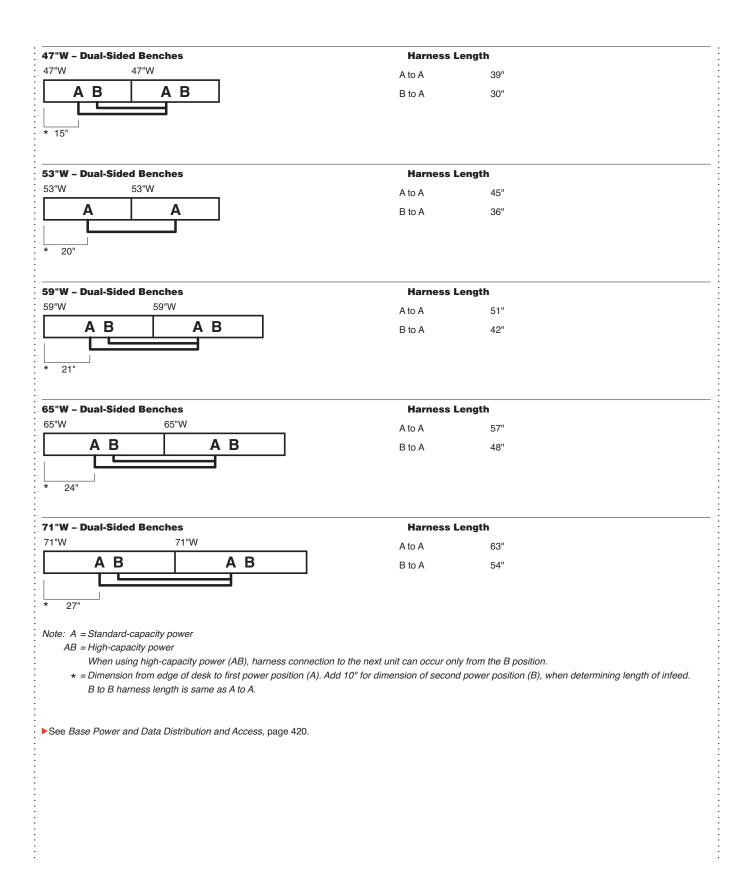

Base Power and Data Power Routing Harness Chart


Base Power and Data Building Interface

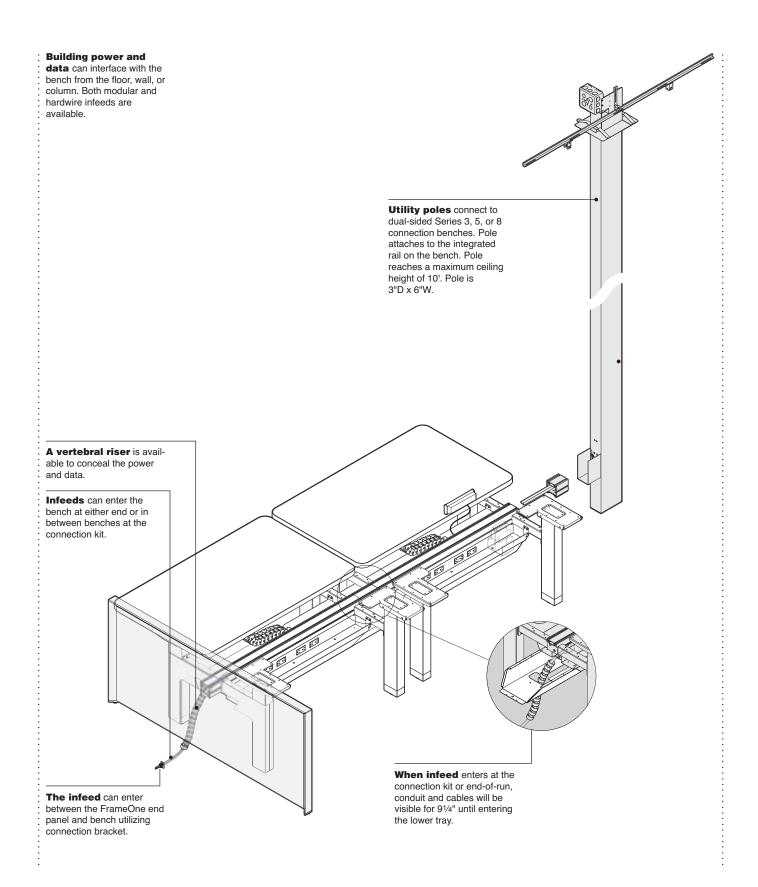

Wiring and Cabling



Hardwire-to-modular power infeed is available in 12 and 24 foot lengths. If a shorter harness is needed it can be cut by the electrician. The hardwired end is connected by an electrician to a junction box wherever it is located in the building. The harness is routed into the bench and connected to a power block. Non-PVC is standard. PVC version can be optioned.



Modular-to-modular power infeed is available in 12 and 24 foot lengths. A straight/flush modular junction box faceplate cover is standard and is wired to a 411/16" square junction box located in the building. The harness is then routed into the bench and connected to a power block. A 90° junction box faceplate can be optioned and is recommended for use at a wall or column. The straight/flush is generally used in the floor. Non-PVC is standard. PVC version can be optioned.



<u>AAAAAAA</u>E

Extension vertebral

along the floor. Length is

conceal conduit and cables

riser can be used to

requirements.

0

νť

Lower

tray

Lower tray is located 91/4"

Power and data can

enter the bench through the

end of the lower tray. The

opening is approximately

81/4" from the end of the

See Base Power and

Cable Capacities, page 418.

desk

a∎t

91/4

from the floor

Modular junction box faceplate can be ordered

separately and used with any modular harness length when 12 and 24 foot lengths are not appropriate. Straight/ flush and 90° faceplates are available. A 90° junction box faceplate is recommended for use at a wall or column. Non-PVC is standard, PVC version can be optioned.

Hardwired/Chicago power infeeds are supplied by the electrician.


San Francisco can use hardwire or modular infeeds. When infeed is coming from floor or wall, liquid tight metallic conduit may be required. In this case, order infeed specific to San Francisco.



New York power infeeds are available. The junction box is mounted to the connection kit.


A 50" harness is included to reach the first power block in the bench. If shorter harness in needed, it can be cut by the electrician. Non-PVC is standard. PVC version can be optioned. Hardwireto-modular infeeds can also be used.

Base power infeeds are not available.

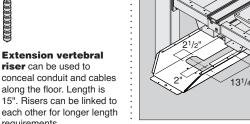

Power and data can enter through the lower tray of the connection kit. The center line is between two benches.

The lower tray is interchangeable either right- or left-hand on the connection kit. Placement determined at install



metic and will not fully con-Shrouds encase individual allow 2" inside width clearance.

Three wiring schemat-

ics are available-3+1, 2+2, and three circuits with separate neutrals (3SN). All the components in an electrical distribution system must use the same wiring schematic. For safety, the components are keyed, labeled, and color-coded to make it impossible to connect mismatched parts.


Non-PVC modular electrical components

are the standard offering with the option to order PVC on some components. For those trying to gain the LEED Innovation and Design credit, non-PVC should be selected.

All electrical components are cULus listed to the appropriate industry standards in accordance with the National and Canadian Electrical code.

Local electrical codes vary. Consult a qualified electrical contractor or engineer for the proper installation of all electrical components.

Closed shrouds are cosceal conduct and cables. lifting columns and only



enter the bench through the connection bracket when attaching a FrameOne end panel. The opening is approximately 3" from the end of the end panel.

Base Power and Data

Modular Power Block – Standard-Capacity




	Standard Includes		Required to Specify	
Need help? Product details, page 420	Non-PVC power block		1 Style number 2 Power schematic (see below)	
	Options	U.S. Price	Required to Specify	
Power Schematics	• 3+1 • 2+2 • 3SN	No cost No cost No cost	Specify with 3+1. Specify with 2+2. Specify with 3SN.	
Specificatio	on Information			
• Style Number	·U.S. Price			
FMVPBS	\$169			

Modular Power Block – High-Capacity

FMVPBH


\$360



	Standard Includes		Required to Specify
μ	 Two non-PVC power blocks Block-to-block connector		1 Style number 2 Power schematic (see below)
	Options	U.S. Price	Required to Specify

Power	• 3+1	No cost	Specify with 3+1.	
Schematics	• 2+2	No cost	Specify with 2+2.	
	• 3SN	No cost	Specify with 3SN.	
Specificatio	on Information			
Specificatio	on Information •U.S.			

Chicago Hardwire Box

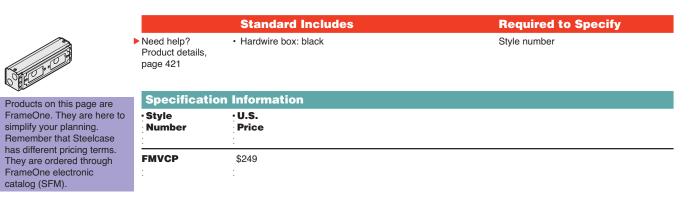

Base Power and Data Receptacles and Filler Package

Standard Includes

15-amp, system ground duplex receptacle: black

Required to Specify

1 Style number

2 Power schematic

Duplex Receptacle



Tip: Duplex receptacles are not for use with dash or SOTO LED lights. Specify with flexible receptacles. Page 428 ► Need help?

Product details,

page 421			3 Options, if selected (see below)
	Options	U.S. Price	Required to Specify
Power	3+1		
Schematics	Line 1	No cost	Specify with 3+1, line 1.
and Line	Line 2	No cost	Specify with 3+1, line 2.
Options	Line 3	No cost	Specify with 3+1, line 3.
-	• Line 4	No cost	Specify with 3+1, line 4.
	2+2		
	Line 1	No cost	Specify with 2+2, line 1.
	Line 2	No cost	Specify with 2+2, line 2.
	Line 3	No cost	Specify with 2+2, line 3.
	• Line 4	No cost	Specify with 2+2, line 4.
	3SN		
	Line 1	No cost	Specify with 3SN, line 1.
	Line 2	No cost	Specify with 3SN, line 2.
	• Line 3	No cost	Specify with 3SN, line 3.
Amperage	• 20-amp	+\$22	Specify with 20-amp.
Ground Type	 Isolated 	+\$12	Specify with isolated ground.

Specification Information				
• Style Number	•U.S. Base Price			
FMVRD	\$32 :			

Products on this page are FrameOne. They are here to simplify your planning. Remember that Steelcase has different pricing terms. They are ordered through FrameOne electronic catalog (SFM).



See page 1 for details.

Details Specification Guide

Flexible Receptacle



Need help? Product details, page 421

Standard Includes Non-PVC, 15-amp, system ground duplex receptacle: black

Required to Specify 1 Style number 2 Power schematic 3 Options, if selected (see below)

Tip: Specify flexible receptacles for use with dash and SOTO LED lights.

	Options	U.S. Price	Required to Specify
Power	3+1		
Schematics	Line 1	No cost	Specify with 3+1, line 1.
and Line	Line 2	No cost	Specify with 3+1, line 2.
Options	• Line 3	No cost	Specify with 3+1, line 3.
-	• Line 4	No cost	Specify with 3+1, line 4.
	2+2		
	Line 1	No cost	Specify with 2+2, line 1.
	Line 2	No cost	Specify with 2+2, line 2.
	• Line 3	No cost	Specify with 2+2, line 3.
	• Line 4	No cost	Specify with 2+2, line 4.
	3SN		
	Line 1	No cost	Specify with 3SN, line 1.
	Line 2	No cost	Specify with 3SN, line 2.
	• Line 3	No cost	Specify with 3SN, line 3.
Ground Type	 Isolated 	+\$12	Specify with isolated ground.

Specification Information				
Style Number	•U.S. Base Price			
FMVRF	\$89			

Filler Package - Power/Data

Standard Includes Required to Specify · Package of 20 fillers: black Style number ▶ Need help? Product details, page 421

Specification Information ·U.S. • Style Number Price FMVF \$34

Products on this page are FrameOne. They are here to simplify your planning. Remember that Steelcase has different pricing terms. They are ordered through FrameOne electronic catalog (SFM).

For Canadian Pricing Multiply U.S. Price by the Canadian price factor. See page 1 for details.

Base Power and Data Modular Harnesses



	Stand	ndard Includes		Required to Specify	
Need help? Product deta page 420		Non-PVC modular harness		1 Style number 2 Power schematic 3 Options, if selected (see below)	
	Optio	ons	U.S. Price	Required to Specify	
Power Schematic	• 3+1 • 2+2 • 3SN		No cost No cost No cost	Specify with 3+1. Specify with 2+2. Specify with 3SN.	
PVC	• PVC m	odular harness	-\$10	Specify with PVC modular harness.	
Specific	ation Inform	ation			
Length	•Style Number	•U.S. Base Price			
30"	FMVH30	\$112			
36"	FMVH36	\$112			
39"	FMVH39	\$112			
42"	FMVH42	\$112			
45"	FMVH45	\$124			
48"	FMVH48	\$124			
51"	FMVH51	\$124			
54"	FMVH54	\$124			
57"	FMVH57	\$124			
60"	FMVH60	\$142			
63"	FMVH63	\$142			
66"	FMVH66	\$142			
69"	FMVH69	\$142			
72"	FMVH72	\$155			
75"	FMVH75	\$155			
	:	:			

Products on this page are FrameOne. They are here to simplify your planning. Remember that Steelcase has different pricing terms. They are ordered through FrameOne electronic catalog (SFM).



See page 1 for details.

Details Specification Guide

Base Power and Data Power Infeeds

Hardwire-to-Modular Power Infeed




Standard Includes	Required to Specify 1 Style number 2 Power schematic 3 Options, if selected (see below)	
Non-PVC infeed harness		
Options	U.S. Price	Required to Specify
• 3+1	No cost	Specify with 3+1.
• 2+2	No cost	Specify with 2+2.
• 3SN	No cost	Specify with 3SN.
PVC modular harness	-\$10	Specify with PVC.
PVC modular harness	-\$10	Specify with PVC.
	 Non-PVC infeed harness Options 3+1 2+2 3SN 	Options U.S. Price • 3+1 No cost • 2+2 No cost • 3SN No cost

Length	• Style Number	•U.S. Base Price	
6'	FMVI6H	\$181	
12'	FMVI12H	\$231	
24'	FMVI24H	\$332	

Modular-to-Modular Power Infeed

▶ Need help?



Product details, page 424	Straight/flush junction box faceplate		2 Power schematic 3 Options, if selected (see below)	
	Options	U.S. Price	Required to Specify	
Power	• 3+1	No cost	Specify with 3+1.	
Schematics	• 2+2	No cost	Specify with 2+2.	
	• 3SN	No cost	Specify with 3SN.	
Faceplate	90° junction box faceplate	+\$37	Specify with 90° faceplate.	
PVC	PVC modular harness	\$10	Specify with PVC.	

Standard Includes

Non-PVC infeed harness

Length	• Style Number	•U.S. Base Price	
6'	FMVI6M	\$253	
2'	FMVI12M	\$313	
4'	FMVI24M	\$420	

Products on this page are FrameOne. They are here to simplify your planning. Remember that Steelcase has different pricing terms. They are ordered through FrameOne electronic catalog (SFM).

For Canadian Pricing Multiply U.S. Price by the Canadian price factor.

See page 1 for details.

Required to Specify

1 Style number

San Francisco Power Infeed



	Standard Inclu	ıdes	Required to Specify
Need help? Product details page 425		12' PVC infeed harness with liquid tight metallic conduit	
	Options	U.S. Price	Required to Specify
Power Schematics	• 3+1 • 2+2 • 3SN	No cost No cost No cost	Specify with 3+1. Specify with 2+2. Specify with 3SN.
Specifica	tion Information		
	·U.S. Price		
FMVISS	\$299		

This product is FrameOne. It is here to simplify your planning. Remember that Steelcase has different pricing terms. They are ordered through FrameOne electronic catalog (SFM).

New York Power Infeed



	Standard Includes	Required to Specify
 Need help? Product details, page 425 	 50" PVC infeed harness with liquid tight meta Bracket 	llic conduit 1 Style number 2 Power schematic (see below) 3 Options, if selected (see below)


	Options	U.S. Price	Required to Specify
Power	• 3+1	No cost	Specify with 3+1.
Schematics	• 2+2 • 3SN	No cost No cost	Specify <i>with 2+2.</i> Specify <i>with 3SN.</i>
PVC	PVC modular harness	-\$10	Specify with PVC.

Style	•U.S.		
Style Number	Base		
	Price		

AFMVINN \$192



Junction Box Faceplate – Modular




Specify
d (see below)
Specify
aceplate.

Products on this page are FrameOne. They are here to simplify your planning. Remember that Steelcase has different pricing terms. They are ordered through FrameOne electronic catalog (SFM).



For Canadian Pricing Multiply U.S. Price by the Canadian price factor. ▶ See page 1 for details.

Dual-Sided Connection Bench Utility Pole



Standard Includes	Required to Specify
 Utility pole: anodized aluminum Connection kit: slate Ceiling kit Brackets and caps Mounting brackets 	Style number
on Information	
·U.S. Price	
\$950	
	Utility pole: anodized aluminum Connection kit: slate Ceiling kit Brackets and caps Mounting brackets Information U.S. Price

Tip: Attach to dual-sided Series 3, 5, or 8 connection benches only.

Tip: Infeed is ordered separately. ► See page 430

Tip: Utility pole reaches a maximum ceiling height of 10'. Pole is 3"D x 6"W.

Tip: Open or closed shrouds can be specified. The connection bench must also be specified with open or closed shrouds. Verify that the two style numbers match.

Tip: Utility pole can be specified with a FrameOne end panel. ► See page 405

Tip: Bench footprint increases by 7⁵/16" when a utility pole is added.

Details Specification Guide

Base Power and Data Bracket Kit and Block-to-Block Connector

Block-to-Block Connector



Tip: Block-to-block connector is only needed when converting standard-capacity power to high-capacity.

 Need help? Product details, page 420 	Connector		1 Style number 2 Power schematic (see below)
	Options	U.S. Price	Required to Specify
Power	• 3+1	No cost	Specify with 3+1, line 1.
Schematics	• 2+2	No cost	Specify with 2+2, line 1.
	• 3SN	No cost	Specify with 3SN, line 1.

Standard Includes

Required to Specify

Specification Information					
• Style Number	· U.S. Price				
FMVB	\$19				

Products on this page are FrameOne. They are here to simplify your planning. Remember that Steelcase has different pricing terms. They are ordered through FrameOne electronic catalog (SFM).



For Canadian Pricing
Multiply U.S. Price by the
Canadian price factor.
See page 1 for details.

Extension Vertebral Riser


<u>AAAAAAAA</u>

	Stan	dard Includes	Required to Specify		
eed help? • Riser: black plastic roduct details, age 425		black plastic	Style number		
eight	tion Inform Style Number	ultion U.S. Price			



Details Specification Guide

Worksurface Power and Data

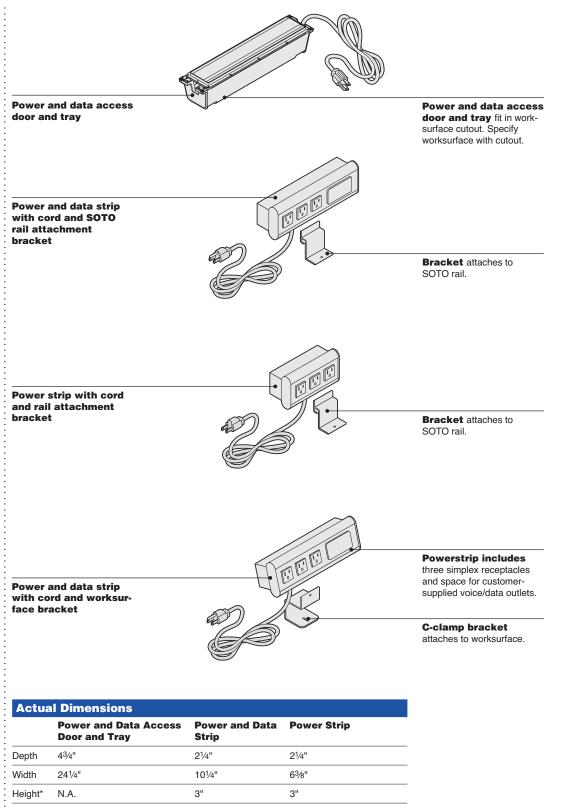


*Above worksurface.




Power and data access door is optional on all dualsided base and dual-sided connection benches. One door is centered on the worksurface and allows user access to power and data outlets as well as cord management.


See Base Power and Data Distribution and Access, page 420.



Data cutout in trays can accommodate either a single gang or a modular furniture communication faceplate. Tray includes adapter to accommodate modular faceplate. Data cutout trays are ordered separately. See Base Power and Data Distribution and Access, page 420.



Access holes in tray allow power and data to be routed straight back.



Height of tray is 4³/4¹¹ so lower storage height must be accounted for when used adjacent to tray.



10' cord with plug is standard. Cord and plug option can only be used with height-adjustable tables.

Cord and plug version has an integrated overload circuit breaker.

Three power strips are available—power only with rail attachment, power and data with rail attachment, and power and data with worksurface attachment.






Powerstrips have a 8' cord and are ordered separately.

Power and data strip provides additional electrical and voice and data receptacles.


Power and data strips are field-installed on either a SOTO rail or worksurface. Specify appropriate attachment bracket depending on application. Power strips can be
mounted on the SOTO rail.
Cord length is 8'. Available
PVC only.




Power and data strip worksurface bracket attaches to worksurfaces ⁵⁹/64" to 15/8" thick. Available with an 8' long cord with plug.



Power and data is maintenance accessible by accessing the power tray on the integrated rail. Devices are then plugged in and the cables are routed through the wire manager to the worksurface. This application is intended for those devices that will remain plugged in and are not managed by users.



Upper tray is standard and provides cord management and data termination.
See Base Power and Data Distribution and Access, page 420.



The lower tray is standard and always used in conjunction with an upper tray. It is intended for use when voice/data cables are being routed. It conceals data cables creating a clean visual.


Wiring & Cabling

Available with an 8' or 10'long cord with plug, depending on option.

Chicago, New York City, and Los Angeles have special requirements.

Underwriters Laboratory (UL) listed. These products have been designed to meet U.S. and Canadian national electrical and energy codes and most local building codes. Local electrical codes vary. Consult a qualified electrician or electrical engineer for proper installation of all electrical equipment.

Application Topics



Flat panel monitor arms cannot be mounted behind the power and data tray cutout. It must be C-clamped to the side of the cutout.

Surface Materials

Power and data strip • 8043 Clear Anodized Aluminum cover with black faceplate

Attachment brackets
• 4799 Platinum paint only

Power and Data Access Door and Tray

Door

Paint

Anodized aluminum

Door bezel • 6694 Slate Plastic

Inner and outer tray • 7237 Slate Paint

End caps for outer tray • 6694 Slate Plastic

Worksurface Power and Data Power Strips

Power and Data Strips with Cord and Rail Attachment Brackets

	Standard Includes	Required to Specify
 Need help? Product details, page 436 	 Power strip with 8' PVC cord Attachment bracket: 4799 Platinum 	Style number
Specificati	on Information	
• Style Number	· U.S. Price	
Power and	Data Strip with Cord and Rail Attach	nent Bracket
FMVPDS	\$230	
	with Oard and Dall Attachment Duas	l l
Power Strip	with Cord and Rail Attachment Brac	Ket
Power Strip FMVPS	\$210	Ket

Power and Data Strips with Cord with Worksurface Attachment Bracket

		Standard Inc	ludes	Required to Specify
Need help? Product detai page 436	ls,	Aluminum cover wit	ip with cord: 8043 Clear Anodized th black faceplate iment bracket: 4799 Platinum	Style number
Specifica	ation Ir	nformation		
Specifica Dimension D W		nformation Style Number	·U.S. Price	

Products on this page are Answer or FrameOne. They are here to simplify your planning. Remember that Steelcase has different pricing terms. They are ordered through FrameOne (SFM) or Answer (TSA) electronic catalog.



See page 1 for details.

Worksurface Power and Data—Power and Data Access Door & Tray

Worksurface Power and Data—Power and Data Access Door & Tray



Tip: Remember to specify cutout for power and data tray on the worksurface style number.

Tip: Power schematics, line options, and ground options are not for use with heightadjustable benches.

	Star	dard Includ	es	Required to Specify
Need help? Product detail page 436	Inner tOuter	bezel: 6694 Slate tray with six simple	ex receptacles: 7237 Slate s: 7237 Slate and 6694 Slate	1 Style number 2 Paint color for door 4 Options, if selected (see below) ▶ See <i>Surface Materials</i> , page 442.
	Opti	ons	U.S. Price	Required to Specify
Surface Materials	DoorPaintAnodi:	zed aluminum	No cost +\$22	Specify paint color. Specify with 8043 Clear Anodized Aluminum.
Specifica	ation Inform	nation		
	U.S. Base	• Style • Number	·U.S. Base	

Price

Cord and Plug

Price

UTTRC	\$999	UTTRCN	\$1009

Non-PVC

Products on this page are Answer. They are here to simplify your planning. Remember that Steelcase has different pricing terms. They are ordered through Answer electronic catalog (TSA).



Multiply U.S. Price by the Canadian price factor. See page 1 for details.

Details Specification Guide

Surface Materials

Surface Materials	442
Directional Laminate Grain Directions	447
Wood Veneer Grain Directions	448

Surface Materials

This listing includes all

the surface material choices

that are available for the products in this specification

auide.

Resources

For more information about surface materials, refer to the following resources:

- · Details Finishes and
- Laminates Guide
- Steelcase Surface Materials Reference
- Manual
- Steelcase Wood Finish Swatch Card
- www.steelcase.com

Additional surface materials specification tools are available to

assist you in the specification process-the Surface Materials Binders.

Surface Materials Binders include:

· A complete set of swatch cards for hard surfaces, vertical surface fabrics, and seating upholstery

Paint

See Surface Materials Reference Manual for a listing of available paints for Victor2.

Tip: All products may not be available in all colors listed below

- Applies to:
- Lighting
- · Computer support tools
- Series 3, 5, and 7 Height-AdjusTable bases
- Organizational worktools Flat panel arm

Price Group 1

0835	Black
4231	Arctic White Gloss
4710	Low Gloss Black
4750	Champagne
4799	Platinum
7018	Pewter
7021	Champagne
7027	Charcoal
7055	Metallic Red
7207	Black
7270	Silverstone
8046	Polished Aluminum

G = Established

Applies to: Airtouch Height-AdjusTable bases

> **Price Group 1** 7207 Black

Applies to:

Applies to:

Paint

0835 Black

4242 Milk

7207 Black

7225

7230

7236

7237

7238

7239

7241

7243

7278

4750

4752

4788

4798

4799

7360 Merle

Smooth Paint

Textured Paint

Sand

Basalt

Fog **G**

Slate **G**

Fieldstone

Arctic White

Dark Bronze

Smooth Metallic Paint

Champagne Metallic

Gold Dust Metallic G

Steel Metallic 0

Sterling Metallic

Platinum Metallic

Textured Metallic Paint

4803 Near Black Metallic

7245 Carbon Metallic

7246 Midnight Metallic

Midnight

Seagull

Price Group 2

4728 Nickel Metallic

4744 Pearl Metallic

4743 Mineral Metallic

4799 Platinum

Centered screen brackets

Series 3, 5, and 8 Height-

Adjustable bench shrouds

Steelcase Surfaces

Price Group 1

Price Group 2 4799 Platinum 7246 Midnight

Tip: Airtouch lifting column is available in 4799 Platinum only.

Select Surfaces

Price Group 3 Accent paint

Accent paints allow you to choose from a pre-matched color palette of trend driven colors that are available without the PerfectMatch registration fee. Refer to the Surface Materials Reference Manual for more information about this program.

Applies to: dash LED light

- 4AQ6 Maya Blue 4AQ7 Tangerine 4AQ8 Wasabi 4AQ9 Scarlet
- 4AT7 Concord 4AV3 Blue Jay

Applies to: Series 3, 5, and 8 Height-AdjusTable bench bases

Price Group 1

0835 Black 4799 Platinum

Metal and Accessory Paint 4140 Arctic White Gloss 4144 Black Gloss

Custom Surfaces Price Group 3

PerfectMatch

PerfectMatch is a service that allows you to create your own paint color. Refer to the Surface Materials Reference Manual for more information about this program. Tip: Price Group 3 paints are not available on Height-AdjusTable bench bases.

Applies to: Power and Data Access Door and Trav

Steelcase Surfaces

Price Group 1 Smooth Paint 4242 Milk

Textured Paint

7207 Black 7225 Sand 7230 Basalt 7236 Fog 🕒 Slate **G** 7237 7238 Fieldstone 7239 Midnight 7241 Arctic White 7243 Seagull 7360 Merle

Price Group 2

- **Smooth Metallic Paint** 4728 Nickel Metallic 4743 Mineral Metallic 4744 Pearl Metallic 4750 Champagne Metallic 4752 Steel Metallic 4788 Gold Dust Metallic G Sterling Metallic 4798
- 4799 Platinum Metallic
- 4803 Near Black Metallic

Textured Metallic Paint

7245 Carbon Metallic 7246 Midnight Metallic

Custom Surfaces Price Group 3

PerfectMatch

PerfectMatch is a service that allows you to create your own paint color. Refer to the Surface Materials Reference Manual for more information about this program. Tip: Price Group 3 paints are not available on Height-AdjusTable bench bases.

Custom Surfaces

Price Group 3

program.

PerfectMatch PerfectMatch is a service that allows you to create your own paint color. Refer to the Surface Materials Reference Manual for more information about this

Tip: Price Group 3 paints are not available on Height-AdjusTable worksurface bases

Laminate and Edge Finishes

Edge finish is specified separately for all worksurface options, except wood veneer. Urethane profile edge finishes are Black 6000 and Felt 6278. The recommended edge finishes for Universal and knife edge worksurfaces are below.

Applies to: • Height-AdjusTable worksurfaces

Height-AdjusTable bench worksurfaces

Lami	Laminate Color		nmended or 1 mm Color		mmended e Color
Fibe	Laminate				
: 2850	Vanadium Fiber	6654	Sand*	6697	Fog
: 2851	Rhyme Fiber 🕒	6631	Cream*	6654	Sand
2852	Tungsten Fiber	6636	Mist*	6654	Sand
2854	Vellum Fiber	6655	Warm White*	6697	Fog
2859	Novell Fiber	6001	Coffee*	6697	Fog
2860	Granite Fiber	6000	Black*	6000	Black
2861	Coconut Fiber	6654	Sand*	6654	Sand
2862	Stucco Fiber	6053	Seagull*	6053	Seagull
Micro	o Laminate				
2920	Marl Micro	6053	Seagull*	6053	Seagull
2921	Gypsum Micro	6654	Sand*	6654	Sand
	Clay Micro	6654	Sand*	6654	Sand
: 2923	Shadow Micro 🕒	6249	Platinum Solid*	6249	Platinum Solid
Patir	a Laminate				
2870	Blonde Bronze Patina	6654	Sand*	6654	Sand
2871	Blackened Bronze Patina	6615	Grey V5*	6000	Black
2873	Instant Iron Patina	6615	Grey V5*	6000	Black
	Laminate				
	Cream 🖪	6631	Cream*	6654	Sand
	Arctic White	6009	Arctic White*	6009	Arctic White
2746	Black	6000	Black*	6000	Black
	Warm White 🕒	6655	Warm White*	6654	Sand
2811	Mist G	6636	Mist*	6697	Fog
2883	Seagull	6053	Seagull*	6053	Seagull
2884	Milk	6052	Milk*	6052	Milk
2885	Dune	6654	Sand*	6654	Sand
	kle Laminate				
2820	Coffee Speckle	6631	Cream*	6654	Sand
	Woodrose Speckle	6635	Dawn* 🕒	6000	Black
	Driftwood Speckle	6631	Cream*	6000	Black
2824	Smoke Speckle	6636	Mist*	6654	Sand
2825	Vanadium Speckle	6619	lce* 🕒	6697	Fog

Tip: P-Edge colors are for Height-AdjusTable worksurfaces only.

Lami	nate Color		nmended or 1 mm Color		nmended e Color	
Woodgrain Laminate						
2406	Clear Cherry	6234	Clear Cherry*	6000	Black	
2409	Clear Maple	6237	Clear Maple*	6654	Sand	
2410	Graphite Walnut	6231	Graphite Walnut*	6000	Black	
2412	Natural Cherry	6034	Natural Cherry	6000	Black	
2422	Medium Cherry	6036	Medium Cherry	6000	Black	
2511	Winter on Maple	6037	Winter on Maple	6654	Sand	
2538	Clear Walnut	6245	Clear Walnut*	6000	Black	
2539	Warm Oak 🕒	6246	Warm Oak* 🕒	6246	Warm Oak 🖲	
2592	Blonde on Maple	6038	Blonde on Maple	6654	Sand	
2714	Natural Walnut	6041	Natural Walnut	6000	Black	
2772	Medium Mahogany on Walnut 🖲	6045	Medium Mahogany on Walnut G	6000	Black	
2HAT	Acacia	6213	Acacia	6654	Sand	
Turns	stone Laminate Colle	ection**				
2535	Virginia Walnut	6242	Virginia Walnut	6000	Black	
2536	Blackwood	6243	Blackwood	6000	Black	
2612	Marbled Maple	6676	Marbled Maple	6000	Black	
2614	Chocolate Walnut	6677	Chocolate Walnut	6000	Black	
2615	Marbled Cherry	6678	Marbled Cherry	6000	Black	

* PVC-free edge banding (also includes: 6689 Brushed Silver, 6694 Slate, 6695 Midnight, and 6698 Fieldstone)

** A selection of laminates and edge bands in this collection are available on Steelcase brand products. This collection is available with standard leadtimes and supported like standard laminates to help make ordering easy.

Note: Woodgrain Laminates and the Turnstone Laminate Collection are not available as matched sets. The grain patterns will not align.

Custom Surfaces

Open Line Laminate (OLL)

This service allows you to order non-standard laminate at an additional processing fee of \$67 U.S. per worksurface or top, plus the cost of the laminate.

When processing orders for Open Line laminate on Details worksurfaces, specify 2900 in the laminate finish field and enter the OLL manufacturer information. Enter the required edge finish as you would a standard laminate.

Laminate Approval and Material Requirements

To confirm whether a particular laminate has already been tested for use on a specific Steelcase product or to determine material square foot requirements: • Visit www.steelcase.com

For additional information, refer to the Steelcase Surface Materials Reference Manual.

= Established

Wood

· Applies to:

· Series 3 and 5 Height-AdjusTable worksurfaces

Steelcase carefully selects veneer and solid wood for consistent color and grain structure. Wood is a natural material and variations will occur in color, grain and texture. These variations are part of the inherent natural beauty of wood and are not considered defects.

All wood products will darken with age and exposure to ultraviolet light. This is especially apparent with cherry and maple veneer. We recommend that desk accessories be rearranged periodically to ensure even aging of wood surfaces.

When storing your wood furniture, please follow the following guidelines:

- · Do not store products in trailers
- Store products in areas that simulate office temperatures (60°F to 90°F)
- Store products in areas that maintain constant, office-like humidity levels
- Keep product away from light. Cover products to make sure they are not exposed to light.

Steelcase Surfaces

Veneer

Veneers are matched for proper balance and consistency. Veneers are available flat cut or quarter cut, except for Oak, which is rift cut. Refer to the *Surface Materials Reference Manual* for descriptions of each cut.

Open-pore finish is a medium gloss finish that leaves the wood grain texture visible to the eye and distinguishable to the touch.

See Surface Materials Reference Manual for a listing of available veneers for Victor2.

Flat-cut open-pore finish choices

3062	FC/OP Graphite Walnut
3402	FC/OP Clear Cherry (Aged)
3412	FC/OP Natural Cherry 🕒
3422	FC/OP Medium Cherry
3522	FC/OP Clear Maple*
3572	FC/OP Amber on Maple 🕒
3592	FC/OP Blonde on Maple
3702	FC/OP Clear Walnut
3712	FC/OP Natural Walnut
3722	FC/OP Dark Mahogany on Walnut
3752	FC/OP Medium Walnut
3762	FC/OP Dark Walnut
3772	FC/OP Medium Mahogany on Walnut
Quar	ter-cut open-pore finish choices
3042	QC/OP Ash*

3042	QU/OF ASI
3222	QC/OP Clear Maple*
3272	QC/OP Amber on Maple 🕒
3292	QC/OP Blonde on Maple
3302	QC/OP Clear Walnut
3312	QC/OP Natural Walnut
3322	QC/OP Dark Mahogany on Walnut
3352	QC/OP Medium Walnut
3362	QC/OP Dark Walnut
3372	QC/OP Medium Mahogany on Walnut
3382	QC/OP Graphite Walnut

Rift-cut open-pore finish choices

3602 RC/OP Desert Oak3612 RC/OP Warm Oak **9**3692 RC/OP Espresso Oak

Full-fill finish is a medium-gloss finish that completely fills the grain texture, yet allows the grain pattern to be seen. The wood has a lustrous, satiny look, and it is smooth to the touch.

Flat-cut full-fill finish choices

3064 FC/FF Graphite Walnut 3404 FC/FF Clear Cherry (Aged) 3414 FC/FF Natural Cherry 3424 FC/FF Medium Cherry 3524 FC/FF Clear Maple* 3544 FC/FF Blonde on Maple 3574 FC/FF Amber on Maple O 3582 FC/FF Winter on Maple 3704 FC/FF Clear Walnut FC/FF Natural Walnut 3714 3724 FC/FF Dark Mahogany on Walnut FC/FF Medium Walnut 3754 3764 FC/FF Dark Walnut 3774 FC/FF Medium Mahogany on Walnut

Quarter-cut full-fill finish choices

3224 QC/FF Clear Maple* 3274 QC/FF Amber on Maple G 3294 QC/FF Blonde on Maple 3304 QC/FF Clear Walnut QC/FF Natural Walnut 3314 3324 QC/FF Dark Mahogany on Walnut QC/FF Medium Walnut 3354 QC/FF Dark Walnut 3364 QC/FF Medium Mahogany on Walnut 3374 3384 QC/FF Graphite Walnut

Rift-cut full-fill finish choices

3604 RC/FF Desert Oak3614 RC/FF Warm Oak **3**3694 RC/FF Espresso Oak

*To ensure an understanding of the color ranges and characteristic variations of natural veneer, a sign-off sheet is required prior to orders being accepted for this clear-coat finish. The sign-off sheet is available through Steelcase advertising stock. Please use form number 09-0000756 for 3042 and form number 05-0001370 for 3222 or 3224.

lo our

Steelcase Surfaces

Composite Veneer

Composite veneers are an engineered wood intended to create specific grain patterns and characteristics. They are pre-stained and finished with Steelcase's Clarity water-borne UV topcoat, which protects the environment while providing durability and clarity. Only open-pore finishes are available on composite wood. Composite veneer and matching edge bands are available on most Steelcase brand products. Composites, for use as a solid nosing substitute, are not available. Steelcase does not recommend mixing composite veneers with natural solid nosings because composite and natural wood grain and color matching are rarely compatible. Composite veneers are Graded-In as Wood Group 1 pricing.

Flat-cut open-pore finish choices

3JDXFC/OP Oak Composite3JFXFC/OP Maple Composite3JHXFC/OP Cherry Composite3JJXFC/OP Walnut Composite

Quarter-cut open-pore finish choices

3HGXQC/OP Oak Composite3JEXQC/OP Maple Composite3JGXQC/OP Cherry Composite

Note: To understand more about composite ordering, leadtimes, and pricing, please consult the composite sign-off sheet available through Steelcase advertising stock, form number 14-0000141. A sign-off sheet is required prior to orders being accepted for composite projects.

Steelcase Surfaces

Premium Veneers

A selection of Premium veneers in this collection are available on most Steelcase brand products. The collection will be available as close to standard leadtimes as possible. However, because adequate supplies of veneer and solids must be secured, all orders will be scheduled individually. Leadtimes will vary based on Premium veneer and Premium solids availability at the time the order is placed. The collection is Graded-In as Wood Group 2 and Wood Group 3, and supported like standard veneers to make ordering easy. Please see the Steelcase surface materials section on village.steelcase.com for sample information and product line availability. All premium veneers are in clear-coat.

Quarter-cut open-pore finish choices Wood Group 2

3032 QC/OP Dark Thin Line Bamboo

3052 QC/OP Ribbon Sapele

Wood Group 3

3832 QC/OP Figured Anegre 3842 QC/OP Figured Makore To ensure an understanding of the color ranges and characteristic variations of natural veneer, a sign-off sheet is required prior to orders being accepted for this clear-coat finish. The sign-off sheet is available through Steelcase advertising stock. Please use form number 09-0000755 for 3032, form number 09-0000757 for 3052, form number 09-0000758 for 3832, and form number 09-0000759 for 3842.

Custom Surfaces

Customiz stain is a service that allows you to create your own stain colors and finishes on standard veneer. Customiz stain color is available on all product lines that offer wood veneer.

A \$500 stain-matching fee applies on CUSTOMIZ requests (Exception: The \$500 fee does not apply on matches to Coalesse standard finishes or for a low-gloss finish request on a standard color). The \$500 fee covers the cost of formulating the Customiz color finish and applies regardless of whether or not an order for product is placed.

In addition, an approval form must be signed to indicate customer acceptance of Customiz match. A \$1,500 initiation fee will be charged prior to first order entry. This initiation fee activates the finish for unlimited use on any Steelcase product for an 18 month time period. After the 18 month time period has lapsed, the Customiz finish may be reactivated for another 18 months for a \$1,000 fee at any point within five years after the \$1,500 initiation fee was paid. If the finish is not reactivated within five years after the \$1,500 initiation fee was paid, the finish will be culled and the customer will need to pay the \$1,500 initiation fee again. All style number related Customiz charges products are no cost as of April 2014. The matching and initiation fees are not discountable.

Customiz stain takes 10 days to formulate. Consult the *Surface Materials Reference Manual* for more information. Custom veneers are also available and must be quoted by Steelcase specials group. Customiz stain on custom veneers takes 2 to 4 weeks to formulate.

Requirements and information on ordering a Customiz stain color are found in the *Surface Materials Reference Manual*.

Plastic	*These solid color and wood grain edge colors are a poly-	SOTO II Fabric Pa
6000 Black	olefin blend, PVC-free mate-	Applies to:
6009 Arctic White	rial for 3 mm and 1 mm edge	· SOTO II mobile cadd
6059 Sterling Dark Solid	bandings.	· SOTO II launch pad
6152 Champagne		Otomological Factoria F
6153 Pewter	Aonulio	Standard Fabric P
6288 Charcoal 6544 Frost	Acrylic	: Dark Grey Felt
6545 Amber	Applies to:	· Oomonti Oomooo
6546 Rain	Modesty and privacy screens	Cogent: Connec Fabric Set 1
Note: Light color plas-	6544A Acrylic Frost	5S17 Tangerine
tic edges are susceptible	- 0044A Acrylic 1 103t	5S18 Scarlet
to degradation due to normal		5S21 Blue Jay 5S23 Wasabi
wear and tear. Staining	Vertical Surface Fabric	5S25 Graphite
(e.g., ball point pen or cloth-	See Surface Materials	5S27 Malt
ing dyes such as blue jeans) and dirt effects are more	<i>Reference Manual</i> for a	:
pronounced in light colors	listing of available fabrics	Cogent: Connec
and are not considered	for c:scape and FrameOne	E Fabric Set 2
defects.	Privacy/Modesty Screens.	5S15 Coconut
		5S16 Turmeric
Applies to:		5S19 Concord
• 3 mm and 1 mm front		5S20 Maya Blue
edge profile on Universal		5S24 Nickel 5S26 Licorice
Tables and knife edge		5S26 Licorice 5S28 Root Beer
6000 Black*		5S93 Blue Print
6001 Coffee*		5S94 Lizard
6009 Arctic White*		5S95 Sailor
6034 Natural Cherry		5S96 Quicksilver
6036 Medium Cherry		5S97 Nugget
6037 Winter on Maple 6038 Blonde on Maple		5S98 Canary 5S99 Lipstick
6041 Natural Walnut		5SD0 Royal Blue
6045 Medium Mahogany		. SOBO Hoyar Blac
on Walnut 🕒		Select Surfaces
6052 Milk*		For information on
6053 Seagull*		products within Se
6219 Clear Oak		Surfaces, including a
6225 Merle		: paints and fabrics from
6231 Graphite Walnut*		: Designtex, Gabriel, Kva
6234 Clear Cherry*		: and Pollack, please refe the Surface Materials
6237 Clear Maple*		Reference Manual or vi
6242 Virginia Walnut*		: steelcase.com/selectsurfa
6243 Blackwood* 6245 Clear Walnut*		·
6246 Warm Oak*		Custom Surface
6249 Platinum Solid*		Price Group CO
6615 Grey V5*		Customer's Own
6619 Ice* G		Material)
6631 Cream*		Fabric Approval an
6635 Dawn*		Yardage
6636 Mist*		To confirm whether a
6654 Sand* 6655 Warm White*		particular COM materia
6676 Marbled Maple		has already been tested
6677 Chocolate Walnut		for use on a specific
6678 Marbled Cherry		: Steelcase product or to
6689 Brushed Silver G		determine actual yardag
6694 Slate*		 requirements: Visit www.steelcase.c
6695 Midnight*		· · visit www.steeicase.c
6697 Fog*		
6698 Fieldstone*		:
		•
:		•
		•
0.5.000		
I = Established		

dy

Pad

ct


ct

S elect accent n vadrat, efer to visit faces. es M


nd

al əd о age .com

Directional Laminate Grain Directions

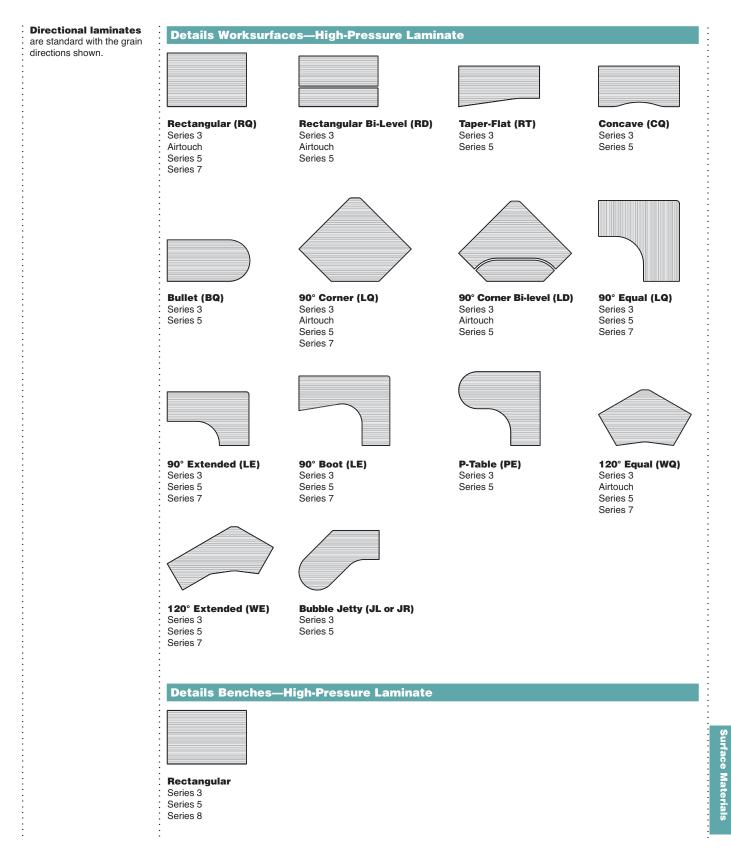

Wood Veneer Grain Directions

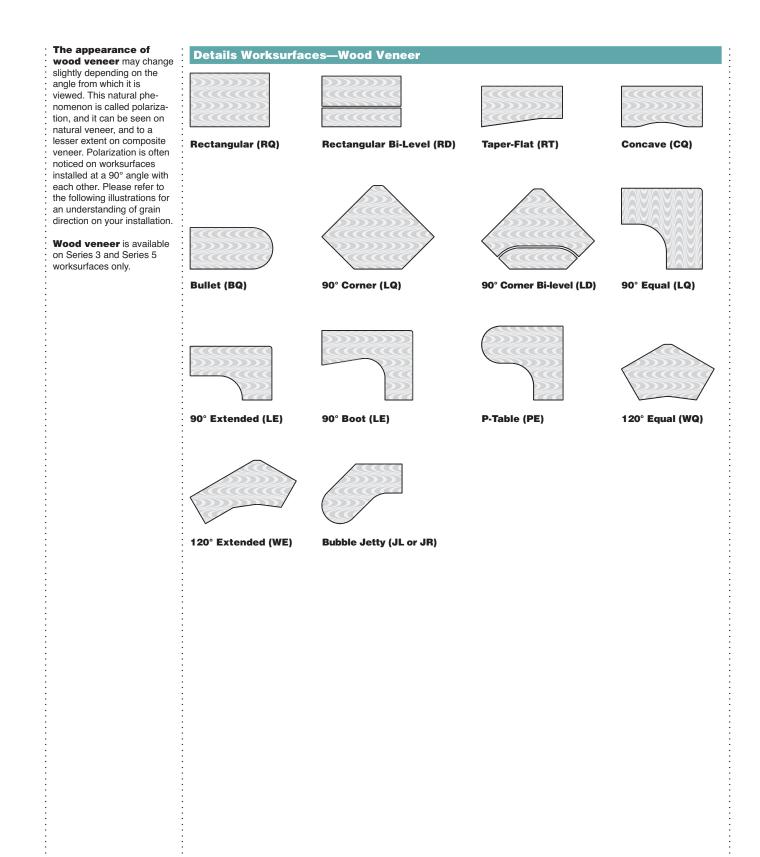

Resources

Terms and Conditions	450
Style Number Index	452

Terms and Conditions

Availability

Details products are available through any authorized Steelcase Dealer. All Details products ship with all necessary parts. Contact your local Steelcase Dealer for specific terms and conditions regarding ordering procedures, cancellations, freight costs, expedited services, handling charges and the return policy.

Warranty

Please refer to the Details website (details-worktools.com) for the most current warranty information.

Order Changes and Cancellations

All orders are subject to acceptance by Seller. An acknowledgment copy of the order will be returned to the Buyer to confirm all order information and final prices. To view the complete Order Change and Cancellation policy, please go to village.steelcase.com. Details reserves the right to disallow requests for changes or cancellations on orders for standard products after ten (10) days from the receipt of the order. Orders requiring special construction or special materials are subject to additional charges and are not subject to cancellation. Details has the right to back-order any items unless purchase order specifically states shipment complete. Changes/ Cancellations must be communicated by Dealer to the Steelcase Solutions Fulfilled Team (SFT) at 888-783-3522.

Dealer Return Policy

Authorized Steelcase Dealers may return unused standard product in its original carton up to ninety (90) days after the date of purchase. Special product is not returnable. Before making a return, you MUST call the Steelcase Solutions Fulfilled Team (SFT) at 888-783-3522 Attach the completed RGA Form to the product to be returned. The RGA number, purchase order number, invoice number and the date of purchase must be included in the shipping documentation.

COD shipments and/or shipments without the completed RGA Form will be refused and returned at shipper's expense. Product must be returned in its original carton and in sellable condition. All product is subject to a return goods inspection. Details reserves the right to deny credit due to the condition of the product, including the determination of user damage or abuse, and/or alterations to the original product design. All returned product is subject to a MINIMUM restocking charge of 25% of the net price.

For product received by Dealer or Dealer's customer in damaged or defective condition or to return a product within the terms of Details warranty, call the Steelcase Solutions Fulfilled Team (SFT) at 888-783-3522 to arrange for a call tag, RGA and shipment back to Details. The terms and conditions herein apply only to the continental 48 states. Orders outside the continental United States will be handled on a case-by-case basis

Standard Product

Products listed in this Details Specification Guide are considered standard products.

Lead-time

Details standard product leadtime is available online at village.steelcase.com. If you have any questions about your order, please contact the Steelcase Solutions Fulfilled Team (SFT) at 888-783-3522.

Specials

A custom product is a nonstandard Details product. It may be an adaptation of an existing Details product or the development of a totally unique concept.

Lead-time

Lead-times vary from 4 to 10 weeks depending on the complexity of the product's design, specifications and quantities ordered. Leadtimes begin at the time a sample is approved (if required) and are exclusive of transit times. Early notification will provide a better opportunity for Details to ensure that we can meet your needs.

Delivery and Freight

A) All shipments within the 48 contiguous United States, except those designated to ports of embarkation, will be shipped FCA factory, freight prepaid and allowed regardless of weight. Details may select the most appropriate mode of shipment from the manufacturing point of its choice. Special shipping methods or handling will be subject to an additional charge.

B) All shipments outside of the 48 contiguous United States to the Zone 1 Caribbean areas designated in the Details Standard Price and Product Manual will be shipped FCA factory, as modified, freight prepaid, and allowed to port of embarkation. All charges beyond the point of embarkation are collect.

C) All shipments to Alaska and Hawa i will be shipped FCA factory; freight prepaid, and allowed to port of embarkation. Details reserves the right to select shipping method and the port of embarkation. All charges beyond the point of embarkation are collect.

D) If Dealer or Dealer's Customer receives a shipment in damaged condition. they shall note the damage on the carrier's freight bill(s) and not reject the shipment. Concealed damage must be reported to the transportation company within 15 days of delivery date. Damages noted on delivery receipt must be filed directly with the delivering carrier within nine (9) months from the date of the bill of lading. If a shipment is delivered on Steelcase trucks, claims for transportation damage must be filed directly with Steelcase.

Title; Risk of Loss

A) Except as provided in Subsection (B) below, title and risk of loss or damage shall pass from Details to Dealer upon delivery to the carrier.

B) Where shipment is by Steelcase truck, title and risk of loss shall pass to the Dealer or Dealer's Customer upon delivery to either of them, or to a designated storage site designated by either of them, or to the Dealer upon delivery to another carrier for delivery. If the product is to be placed in storage by Details, title and risk of loss shall pass immediately to Dealer upon Details placing the product in storage.

C) For international shipments, title and risk of loss or damage shall pass from Details to Dealer upon arrival, but before customs clearance, at the foreign (non-U.S.) (a) port of entry (for ocean shipments), (b) airport (for air shipments), or (c) first point of entry within the foreign jurisdiction for overland shipments.

Terms and Conditions

Style Number Index

Style Number	Page	Description	: Style : Number	Page	Description
1710EF	141	21" Diagonal Keyboard Pltfrm	A3JR762929	291	Series 3 Hgt-Adj Wksf, 29"D Bubble Jetty
1810EF	142	18" Radius Keyboard Pltfrm	A3LD40234023	286	Series 3 Hgt-Adj Wksf, 90° Corner Bi-Level
19AM00	145	19" Keyboard Pltfrm w/Articulating Mouse	A3LD46234623	286	Series 3 Hgt-Adj Wksf, 90° Corner Bi-Level
19AMGG	145	19" Keyboard Pltfrm w/Articulating Mouse	A3LE40235823	287	Series 3 Hgt-Adj Wksf, 90° 23"D Extended
19MD00	144	19" Keyboard Pltfrm	A3LE40236423	287	Series 3 Hgt-Adj Wksf, 90° 23"D Extended
19MDGG	144	19" Keyboard Pltfrm	A3LE40237023	287	Series 3 Hgt-Adj Wksf, 90° 23"D Extended
19ML00	144	19" Keyboard Pltfrm	A3LE40237029	288	Series 3 Hgt-Adj Wksf, 90° Boot
19MLGG	144	19" Keyboard Pltfrm	A3LE40237623	287	Series 3 Hgt-Adj Wksf, 90° 23"D Extended
19MR00	144	19" Keyboard Pltfrm	A3LE40237629	288	Series 3 Hgt-Adj Wksf, 90° Boot
19MRGG	144	19" Keyboard Pltfrm	A3LE40X58B	293	Series 3 Base, 90° Extended
2110EF	141	21" Diagonal Keyboard Pltfrm	A3LE40X64T076E	293	Series 3 Base, 90° Extended
261000	143	26" Keyboard Pltfrm	A3LE46235823	287	Series 3 Hgt-Adj Wksf, 90° 23"D Extended
261026GG	143	26" Keyboard Pltfrm	A3LE46236423	287	Series 3 Hgt-Adj Wksf, 90° 23"D Extended
2610GG	143	26" Keyboard Pltfrm	A3LE46237023	287	Series 3 Hgt-Adj Wksf, 90° 23"D Extended
26GG	150	26" Green-Gel Palm Rest	A3LE46237029	288	Series 3 Hgt-Adj Wksf, 90° Boot
9UAPSC1845	309	Airtouch Hgt-Adj Wksf, 90° Corner	A3LE46237623	287	Series 3 Hgt-Adj Wksf, 90° 23"D Extended
9UAPSC2545	309	Airtouch Hgt-Adj Wksf, 90° Corner	A3LE46237629	288	Series 3 Hgt-Adj Wksf, 90° Boot
9UAPSS2545	309	Airtouch Hgt-Adj Wksf, Rectangular	A3LE46X58B	293	Series 3 Base, 90° Extended
9UAPSS3045	309	Airtouch Hgt-Adj Wksf, Rectangular	A3LE46X64T076E	293	Series 3 Base, 90° Extended
A3BD\$4728	379	Series 3 Dual-Side Base Bench	A3LE58234023	287	Series 3 Hgt-Adj Wksf, 90° 23"D Extended
A3BDS5328	379	Series 3 Dual-Side Base Bench	A3LE58234623	287	Series 3 Hgt-Adj Wksf, 90° 23"D Extended
A3BDS5928	379	Series 3 Dual-Side Base Bench	A3LE58236423	287	Series 3 Hgt-Adj Wksf, 90° 23"D Extended
A3BDS6528	379	Series 3 Dual-Side Base Bench	A3LE58236429	288	Series 3 Hqt-Adj Wksf, 90° Boot
A3BDS7128	379	Series 3 Dual-Side Base Bench	A3LE58237023	287	Series 3 Hgt-Adj Wksf, 90° 23"D Extended
A3BQ462323	285	Series 3 Hqt-Adj Wksf, 23"D Bullet	A3LE58237029	288	Series 3 Hgt-Adj Wksf, 90° Boot
A3BQ462929	285	Series 3 Hgt-Adj Wksf, 29"D Bullet	A3LE58237623	287	Series 3 Hgt-Adj Wksf, 90° 23"D Extended
A3BQ522323	285	Series 3 Hgt-Adj Wksf, 23"D Bullet	A3LE58237629	288	Series 3 Hgt-Adj Wksf, 90° Boot
A3BQ522929	285	Series 3 Hgt-Adj Wksf, 29 D Bullet	A3LE58296429	288	Series 3 Hgt-Adj Wksf, 90° 29"D Extended
A3BQ582323	285		A3LE58297029	288	Series 3 Hgt-Adj Wksi, 90° 29 D Extended Series 3 Hgt-Adj Wksf, 90° 29"D Extended
A3BQ582929	285	Series 3 Hgt-Adj Wksf, 23"D Bullet	A3LE58297629	288	
		Series 3 Hgt-Adj Wksf, 29"D Bullet	•		Series 3 Hgt-Adj Wksf, 90° 29"D Extended
A3BQ642323	285	Series 3 Hgt-Adj Wksf, 23"D Bullet	A3LE58X64T076E		Series 3 Base, 90° Extended
A3BQ642929	285	Series 3 Hgt-Adj Wksf, 29"D Bullet	A3LE64234023	287	Series 3 Hgt-Adj Wksf, 90° 23"D Extended
A3BQ702323	285	Series 3 Hgt-Adj Wksf, 23"D Bullet	A3LE64234623	287	Series 3 Hgt-Adj Wksf, 90° 23"D Extended
A3BQ702929	285	Series 3 Hgt-Adj Wksf, 29"D Bullet	A3LE64235823	287	Series 3 Hgt-Adj Wksf, 90° 23"D Extended
A3BQ762323	285	Series 3 Hgt-Adj Wksf, 23"D Bullet	A3LE64295823	288	Series 3 Hgt-Adj Wksf, 90° Boot
A3BQ762929	285	Series 3 Hgt-Adj Wksf, 29"D Bullet	A3LE64295829	288	Series 3 Hgt-Adj Wksf, 90° 29"D Extended
A3CDS4728	379	Series 3 Dual-Side Center Bench	A3LE70234023	287	Series 3 Hgt-Adj Wksf, 90° 23"D Extended
A3CDS5328	379	Series 3 Dual-Side Center Bench	A3LE70234623	287	Series 3 Hgt-Adj Wksf, 90° 23"D Extended
A3CDS5928	379	Series 3 Dual-Side Center Bench	A3LE70235823	287	Series 3 Hgt-Adj Wksf, 90° 23"D Extended
A3CDS6528	379	Series 3 Dual-Side Center Bench	A3LE70294023	288	Series 3 Hgt-Adj Wksf, 90° Boot
A3CDS7128	379	Series 3 Dual-Side Center Bench	A3LE70294623	288	Series 3 Hgt-Adj Wksf, 90° Boot
A3CQ582929	284	Series 3 Hgt-Adj Wksf, Concave	A3LE70295823	288	Series 3 Hgt-Adj Wksf, 90° Boot
A3CQ642929	284	Series 3 Hgt-Adj Wksf, Concave	A3LE70295829	288	Series 3 Hgt-Adj Wksf, 90° 29"D Extended
A3CQ702929	284	Series 3 Hgt-Adj Wksf, Concave	A3LE76234023	287	Series 3 Hgt-Adj Wksf, 90° 23"D Extended
A3CQ762929	284	Series 3 Hgt-Adj Wksf, Concave	A3LE76234623	287	Series 3 Hgt-Adj Wksf, 90° 23"D Extended
A3JL642923	291	Series 3 Hgt-Adj Wksf, 23"D Bubble Jetty	A3LE76235823	287	Series 3 Hgt-Adj Wksf, 90° 23"D Extended
A3JL642929	291	Series 3 Hgt-Adj Wksf, 29"D Bubble Jetty	A3LE76294023	288	Series 3 Hgt-Adj Wksf, 90° Boot
A3JL702923	291	Series 3 Hgt-Adj Wksf, 23"D Bubble Jetty	A3LE76294623	288	Series 3 Hgt-Adj Wksf, 90° Boot
A3JL702929	291	Series 3 Hgt-Adj Wksf, 29"D Bubble Jetty	A3LE76295823	288	Series 3 Hgt-Adj Wksf, 90° Boot
A3JL762923	291	Series 3 Hgt-Adj Wksf, 23"D Bubble Jetty	A3LE76295829	288	Series 3 Hgt-Adj Wksf, 90° 29"D Extended
A3JL762929	291	Series 3 Hgt-Adj Wksf, 29"D Bubble Jetty	A3LQ40234023	286	Series 3 Hgt-Adj Wksf, 90° Corner
A3JR642329	291	Series 3 Hgt-Adj Wksf, 23"D Bubble Jetty	A3LQ46234623	286	Series 3 Hgt-Adj Wksf, 90° Corner
A3JR642929	291	Series 3 Hgt-Adj Wksf, 29"D Bubble Jetty	A3LQ52235223	286	Series 3 Hgt-Adj Wksf, 90° 23"D Equal
A3JR702329	291	Series 3 Hgt-Adj Wksf, 23"D Bubble Jetty	A3LQ52295229	286	Series 3 Hgt-Adj Wksf, 90° 29"D Equal
A3JR702929	291	Series 3 Hgt-Adj Wksf, 29"D Bubble Jetty	A3LQ52X52B	293	Series 3 Base, 90° Equal
A3JR762329	291	Series 3 Hgt-Adj Wksf, 23"D Bubble Jetty	A3LQ58235823	286	Series 3 Hgt-Adj Wksf, 90° 23"D Equal

.....

Style	Page	Description	: Style : Number	Page	Description
A3LQ58295829	286	Series 3 Hgt-Adj Wksf, 90° 29"D Equal	A3RT762923	284	Series 3 Hgt-Adj Wksf, Taper-Flat
A3LQ58X58B	293	Series 3 Base, 90° Equal	A3WE34235823	290	Series 3 Hgt-Adj Wksf, 120° Extended
A3LQ64236423	286	Series 3 Hgt-Adj Wksf, 90° 23"D Equal	A3WE34236423	290	Series 3 Hgt-Adj Wksf, 120° Extended
A3LQ64296429	286	Series 3 Hgt-Adj Wksf, 90° 29"D Equal	A3WE34X58B	293	Series 3 Base, 120° Extended
A3LQ64T076B	293	Series 3 Base, 90° Equal	A3WE34X64B	293	Series 3 Base, 120° Extended
A3LQ70237023	286	Series 3 Hgt-Adj Wksf, 90° 23"D Equal	A3WE40235823	290	Series 3 Hgt-Adj Wksf, 120° Extended
A3LQ76237623	286	Series 3 Hgt-Adj Wksf, 90° 23"D Equal	A3WE40236423	290	Series 3 Hgt-Adj Wksf, 120° Extended
A3PE46237029	289	Series 3 Hgt-Adj Wksf, 23"D P-Table	A3WE40X58B	293	Series 3 Base, 120° Extended
A3PE46237629	289	Series 3 Hgt-Adj Wksf, 23"D P-Table	A3WE40X64B	293	Series 3 Base, 120° Extended
A3PE58236429	289	Series 3 Hgt-Adj Wksf, 23"D P-Table	A3WE46235823	290	Series 3 Hgt-Adj Wksf, 120° Extended
A3PE58237029	289	Series 3 Hgt-Adj Wksf, 23"D P-Table	A3WE46236423	290	Series 3 Hgt-Adj Wksf, 120° Extended
: A3PE58237629	289	Series 3 Hgt-Adj Wksf, 23"D P-Table	A3WE46X64B	293	Series 3 Base, 120° Extended
A3PE58296429	289	Series 3 Hgt-Adj Wksf, 29"D P-Table	A3WE58233423	290	Series 3 Hgt-Adj Wksf, 120° Extended
A3PE58297029	289	Series 3 Hgt-Adj Wksf, 29"D P-Table	A3WE58234023	290	Series 3 Hgt-Adj Wksf, 120° Extended
A3PE58297629	289	Series 3 Hgt-Adj Wksf, 23"D P-Table	A3WE58234623	290	Series 3 Hgt-Adj Wksf, 120° Extended
A3PE64295823	289	Series 3 Hgt-Adj Wksf, 23"D P-Table	A3WE58236423	290	Series 3 Hgt-Adj Wksf, 120° Extended
A3PE64295829	289	Series 3 Hgt-Adj Wksf, 29"D P-Table	A3WE58X64B	293	Series 3 Base, 120° Extended
A3PE70294623	289	Series 3 Hgt-Adj Wksf, 23"D P-Table	A3WE64233423	290	Series 3 Hgt-Adj Wksf, 120° Extended
A3PE70295823	289	Series 3 Hgt-Adj Wksf, 23"D P-Table	A3WE64234023	290	Series 3 Hgt-Adj Wksf, 120° Extended
A3PE70295829	289	Series 3 Hgt-Adj Wksf, 29"D P-Table	A3WE64234623	290	Series 3 Hgt-Adj Wksf, 120° Extended
A3PE76294623	289	Series 3 Hgt-Adj Wksf, 23"D P-Table	A3WE64235823	290	Series 3 Hgt-Adj Wksf, 120° Extended
A3PE76295823	289	Series 3 Hgt-Adj Wksf, 23"D P-Table	A3WQ34233423	290	Series 3 Hgt-Adj Wksf, 120° Equal
A3PE76295829	289	Series 3 Hgt-Adj Wksf, 23"D P-Table	A3WQ40234023	290	Series 3 Hgt-Adj Wksf, 120° Equal
A3RD342929	283	Series 3 Hgt-Adj Wksf, Rectangular Bi-Level	A3WQ46234623	290	Series 3 Hgt-Adj Wksf, 120° Equal
A3RD402929	283	Series 3 Hgt-Adj Wksf, Rectangular Bi-Level	A3WQ46T058B	293	Series 3 Base, 120° Equal/Extended
A3RD462929	283	Series 3 Hgt-Adj Wksf, Rectangular Bi-Level	A3WQ52235223	290	Series 3 Hgt-Adj Wksf, 120° Equal
A3RQ342323	283	Series 3 Hgt-Adj Wksf, 23"D Rectangular	A3WQ58235823	290	Series 3 Hgt-Adj Wksf, 120° Equal
A3RQ342929	283	Series 3 Hgt-Adj Wksf, 29"D Rectangular	A3WQ64236423	290	Series 3 Hgt-Adj Wksf, 120° Equal
A3RQ402323	283	Series 3 Hgt-Adj Wksf, 23"D Rectangular	A3WQ64X64B	293	Series 3 Base, 120° Equal
A3RQ402929	283	Series 3 Hgt-Adj Wksf, 29"D Rectangular	A5BDS4728	389	Series 5 Dual-Side Base Bench
A3RQ462323	283	Series 3 Hgt-Adj Wksf, 23"D Rectangular	A5BDS5328	389	Series 5 Dual-Side Base Bench
A3RQ462929	283	Series 3 Hgt-Adj Wksf, 29"D Rectangular	A5BDS5928	389	Series 5 Dual-Side Base Bench
A3RQ46T05223E	3 292	Series 3 Base, 23"D Rectangular	A5BDS6528	389	Series 5 Dual-Side Base Bench
A3RQ46T05229E	3 292	Series 3 Base, 29"D Rectangular	A5BDS7128	389	Series 5 Dual-Side Base Bench
A3RQ522323	283	Series 3 Hgt-Adj Wksf, 23"D Rectangular	A5BQ462323	321	Series 5 Hgt-Adj Wksf, 23"D Bullet
A3RQ522929	283	Series 3 Hgt-Adj Wksf, 29"D Rectangular	A5BQ462929	321	Series 5 Hgt-Adj Wksf, 29"D Bullet
A3RQ582323	283	Series 3 Hgt-Adj Wksf, 23"D Rectangular	A5BQ522323	321	Series 5 Hgt-Adj Wksf, 23"D Bullet
A3RQ5823B	292	Series 3 Base, 23"D Rectangular	A5BQ522929	321	Series 5 Hgt-Adj Wksf, 29"D Bullet
A3RQ582929	283	Series 3 Hgt-Adj Wksf, 29"D Rectangular	A5BQ582323	321	Series 5 Hgt-Adj Wksf, 23"D Bullet
A3RQ5829B	292	Series 3 Base, 29"D Rectangular	A5BQ582929	321	Series 5 Hgt-Adj Wksf, 29"D Bullet
A3RQ642323	283	Series 3 Hgt-Adj Wksf, 23"D Rectangular	A5BQ642323	321	Series 5 Hgt-Adj Wksf, 23"D Bullet
A3RQ642929	283	Series 3 Hgt-Adj Wksf, 29"D Rectangular	A5BQ642929	321	Series 5 Hgt-Adj Wksf, 29"D Bullet
A3RQ64T07623E	3 292	Series 3 Base, 23"D Rectangular	A5BQ702323	321	Series 5 Hgt-Adj Wksf, 23"D Bullet
A3RQ64T07629E	3 292	Series 3 Base, 29"D Rectangular	A5BQ702929	321	Series 5 Hgt-Adj Wksf, 29"D Bullet
A3RQ702323	283	Series 3 Hgt-Adj Wksf, 23"D Rectangular	A5BQ762323	321	Series 5 Hgt-Adj Wksf, 23"D Bullet
A3RQ702929	283	Series 3 Hgt-Adj Wksf, 29"D Rectangular	A5BQ762929	321	Series 5 Hgt-Adj Wksf, 29"D Bullet
A3RQ762323	283	Series 3 Hgt-Adj Wksf, 23"D Rectangular	A5CDS4728	389	Series 5 Dual-Side Center Bench
A3RQ762929	283	Series 3 Hgt-Adj Wksf, 29"D Rectangular	A5CDS5328	389	Series 5 Dual-Side Center Bench
A3RT582329	284	Series 3 Hgt-Adj Wksf, Taper-Flat	A5CDS5928	389	Series 5 Dual-Side Center Bench
A3RT582923	284	Series 3 Hgt-Adj Wksf, Taper-Flat	A5CDS6528	389	Series 5 Dual-Side Center Bench
A3RT642329	284	Series 3 Hgt-Adj Wksf, Taper-Flat	A5CDS7128	389	Series 5 Dual-Side Center Bench
A3RT642923	284	Series 3 Hgt-Adj Wksf, Taper-Flat	A5CQ582929	320	Series 5 Hgt-Adj Wksf, Concave
A3RT702329	284	Series 3 Hgt-Adj Wksf, Taper-Flat	A5CQ642929	320	Series 5 Hgt-Adj Wksf, Concave
A3RT702923	284	Series 3 Hgt-Adj Wksf, Taper-Flat	A5CQ702929	320	Series 5 Hgt-Adj Wksf, Concave
A3RT762329	284	Series 3 Hgt-Adj Wksf, Taper-Flat	A5CQ762929	320	Series 5 Hgt-Adj Wksf, Concave
		,		520	,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,,, _,

÷

A5JL642923327Series 5 Hgt-Adj Wksf, 23"D Bubble JettyA5LE76234623323Series 5 Hgt-Adj Wksf, 90° 23"DA5JL642929327Series 5 Hgt-Adj Wksf, 29"D Bubble JettyA5LE76236823323Series 5 Hgt-Adj Wksf, 90° 23"DA5JL702923327Series 5 Hgt-Adj Wksf, 29"D Bubble JettyA5LE76294023324Series 5 Hgt-Adj Wksf, 90° BootA5JL702929327Series 5 Hgt-Adj Wksf, 29"D Bubble JettyA5LE76294623324Series 5 Hgt-Adj Wksf, 90° BootA5JL762923327Series 5 Hgt-Adj Wksf, 29"D Bubble JettyA5LE76294623324Series 5 Hgt-Adj Wksf, 90° BootA5JL762929327Series 5 Hgt-Adj Wksf, 29"D Bubble JettyA5LE76294623324Series 5 Hgt-Adj Wksf, 90° BootA5JR642329327Series 5 Hgt-Adj Wksf, 29"D Bubble JettyA5LE76295829324Details Series 5 90° ExtendedA5JR642329327Series 5 Hgt-Adj Wksf, 29"D Bubble JettyA5LQ40234023322Series 5 Hgt-Adj Wksf, 90° CornA5JR702329327Series 5 Hgt-Adj Wksf, 29"D Bubble JettyA5LQ4234623322Series 5 Hgt-Adj Wksf, 90° EquaA5JR702329327Series 5 Hgt-Adj Wksf, 29"D Bubble JettyA5LQ52235223322Series 5 Hgt-Adj Wksf, 90° EquaA5JR762329327Series 5 Hgt-Adj Wksf, 29"D Bubble JettyA5LQ52252B329Series 5 Base, 90° EquaA5JR762329327Series 5 Hgt-Adj Wksf, 90° Corner Bi-LevelA5LQ58235823322Series 5 Hgt-Adj Wksf, 90° EquaA5LD40234023322Series 5 Hgt-Adj Wksf, 90° Corner Bi-LevelA5LQ58252B <th></th>	
A5JL702923327Series 5 Hgt-Adj Wksf, 23"D Bubble JettyA5LE76294023324Series 5 Hgt-Adj Wksf, 90° BootA5JL702929327Series 5 Hgt-Adj Wksf, 29"D Bubble JettyA5LE76294623324Series 5 Hgt-Adj Wksf, 90° BootA5JL762923327Series 5 Hgt-Adj Wksf, 29"D Bubble JettyA5LE76295823324Series 5 Hgt-Adj Wksf, 90° BootA5JL762929327Series 5 Hgt-Adj Wksf, 29"D Bubble JettyA5LE76295823324Series 5 Hgt-Adj Wksf, 90° BootA5JR642329327Series 5 Hgt-Adj Wksf, 29"D Bubble JettyA5LE76295829324Details Series 5 90° ExtendedA5JR642929327Series 5 Hgt-Adj Wksf, 29"D Bubble JettyA5LQ40234023322Series 5 Hgt-Adj Wksf, 90° CornA5JR702329327Series 5 Hgt-Adj Wksf, 29"D Bubble JettyA5LQ52235223322Series 5 Hgt-Adj Wksf, 90° EquaA5JR702929327Series 5 Hgt-Adj Wksf, 29"D Bubble JettyA5LQ52295229322Series 5 Hgt-Adj Wksf, 90° EquaA5JR762329327Series 5 Hgt-Adj Wksf, 29"D Bubble JettyA5LQ52235223322Series 5 Hgt-Adj Wksf, 90° EquaA5JR762329327Series 5 Hgt-Adj Wksf, 29"D Bubble JettyA5LQ5229529322Series 5 Hgt-Adj Wksf, 90° EquaA5JR762329327Series 5 Hgt-Adj Wksf, 29"D Bubble JettyA5LQ58235823322Series 5 Hgt-Adj Wksf, 90° EquaA5JR762329327Series 5 Hgt-Adj Wksf, 29"D Bubble JettyA5LQ58235823322Series 5 Hgt-Adj Wksf, 90° EquaA5LQ40234023322Series 5 Hgt-Adj Wksf, 90° Corner Bi-LevelA5LQ5	Extended
A5JL702929327Series 5 Hgt-Adj Wksf, 29"D Bubble JettyA5LE76294623324Series 5 Hgt-Adj Wksf, 90° BootA5JL762923327Series 5 Hgt-Adj Wksf, 23"D Bubble JettyA5LE76295823324Series 5 Hgt-Adj Wksf, 90° BootA5JL762929327Series 5 Hgt-Adj Wksf, 29"D Bubble JettyA5LE76295829324Details Series 5 90° ExtendedA5JR642329327Series 5 Hgt-Adj Wksf, 29"D Bubble JettyA5LE76295829322Series 5 Hgt-Adj Wksf, 90° CornA5JR642929327Series 5 Hgt-Adj Wksf, 29"D Bubble JettyA5LQ46234023322Series 5 Hgt-Adj Wksf, 90° CornA5JR702329327Series 5 Hgt-Adj Wksf, 29"D Bubble JettyA5LQ52235223322Series 5 Hgt-Adj Wksf, 90° EquaA5JR702329327Series 5 Hgt-Adj Wksf, 29"D Bubble JettyA5LQ52295229322Series 5 Hgt-Adj Wksf, 90° EquaA5JR762329327Series 5 Hgt-Adj Wksf, 29"D Bubble JettyA5LQ52295229322Series 5 Hgt-Adj Wksf, 90° EquaA5JR762329327Series 5 Hgt-Adj Wksf, 29"D Bubble JettyA5LQ58235823322Series 5 Hgt-Adj Wksf, 90° EquaA5JR762329327Series 5 Hgt-Adj Wksf, 29"D Bubble JettyA5LQ58235823322Series 5 Hgt-Adj Wksf, 90° EquaA5LD40234023322Series 5 Hgt-Adj Wksf, 90° Corner Bi-LevelA5LQ58235823322Series 5 Hgt-Adj Wksf, 90° EquaA5LD46234623322Series 5 Hgt-Adj Wksf, 90° Corner Bi-LevelA5LQ58X58B329Series 5 Base, 90° EqualA5LD40234023323Series 5 Hgt-Adj Wksf, 90° ExtendedA5LQ64236423	Extended
A5JL762923327Series 5 Hgt-Adj Wksf, 23"D Bubble JettyA5LE76295823324Series 5 Hgt-Adj Wksf, 90° BootA5JL762929327Series 5 Hgt-Adj Wksf, 29"D Bubble JettyA5LE76295829324Details Series 5 90° ExtendedA5JR642329327Series 5 Hgt-Adj Wksf, 29"D Bubble JettyA5LQ40234023322Series 5 Hgt-Adj Wksf, 90° CornA5JR642929327Series 5 Hgt-Adj Wksf, 29"D Bubble JettyA5LQ46234623322Series 5 Hgt-Adj Wksf, 90° CornA5JR702329327Series 5 Hgt-Adj Wksf, 29"D Bubble JettyA5LQ52235223322Series 5 Hgt-Adj Wksf, 90° EquaA5JR702929327Series 5 Hgt-Adj Wksf, 29"D Bubble JettyA5LQ52295229322Series 5 Hgt-Adj Wksf, 90° EquaA5JR762329327Series 5 Hgt-Adj Wksf, 29"D Bubble JettyA5LQ52235223322Series 5 Hgt-Adj Wksf, 90° EquaA5JR762329327Series 5 Hgt-Adj Wksf, 29"D Bubble JettyA5LQ5229529322Series 5 Base, 90° EqualA5JR762329327Series 5 Hgt-Adj Wksf, 29"D Bubble JettyA5LQ58235823322Series 5 Hgt-Adj Wksf, 90° EquaA5JR762329327Series 5 Hgt-Adj Wksf, 29"D Bubble JettyA5LQ58235823322Series 5 Hgt-Adj Wksf, 90° EquaA5LD40234023322Series 5 Hgt-Adj Wksf, 90° Corner Bi-LevelA5LQ58235823322Series 5 Hgt-Adj Wksf, 90° EquaA5LD46234623322Series 5 Hgt-Adj Wksf, 90° Corner Bi-LevelA5LQ58X58B329Series 5 Base, 90° EqualA5LE40235823323Series 5 Hgt-Adj Wksf, 90° ExtendedA5LQ64236423 <td< th=""><td></td></td<>	
A5JL762929327Series 5 Hgt-Adj Wksf, 29"D Bubble JettyA5LE76295829324Details Series 5 90° ExtendedA5JR642329327Series 5 Hgt-Adj Wksf, 23"D Bubble JettyA5LQ40234023322Series 5 Hgt-Adj Wksf, 90° CornA5JR642929327Series 5 Hgt-Adj Wksf, 29"D Bubble JettyA5LQ46234623322Series 5 Hgt-Adj Wksf, 90° CornA5JR702329327Series 5 Hgt-Adj Wksf, 29"D Bubble JettyA5LQ52235223322Series 5 Hgt-Adj Wksf, 90° EquaA5JR702929327Series 5 Hgt-Adj Wksf, 29"D Bubble JettyA5LQ52295229322Series 5 Hgt-Adj Wksf, 90° EquaA5JR762329327Series 5 Hgt-Adj Wksf, 29"D Bubble JettyA5LQ52235223322Series 5 Hgt-Adj Wksf, 90° EquaA5JR762329327Series 5 Hgt-Adj Wksf, 29"D Bubble JettyA5LQ5223528329Series 5 Base, 90° EqualA5JR762329327Series 5 Hgt-Adj Wksf, 29"D Bubble JettyA5LQ58235823322Series 5 Hgt-Adj Wksf, 90° EquaA5JR762329327Series 5 Hgt-Adj Wksf, 29"D Bubble JettyA5LQ58235823322Series 5 Hgt-Adj Wksf, 90° EquaA5LD40234023322Series 5 Hgt-Adj Wksf, 90° Corner Bi-LevelA5LQ5825829322Series 5 Hgt-Adj Wksf, 90° EquaA5LD46234623322Series 5 Hgt-Adj Wksf, 90° Corner Bi-LevelA5LQ58X58B329Series 5 Base, 90° EqualA5LE40235823323Series 5 Hgt-Adj Wksf, 90° ExtendedA5LQ64236423322Series 5 Hgt-Adj Wksf, 90° EquaA5LG64236423323Series 5 Hgt-Adj Wksf, 90° ExtendedA5LQ64236423322	
A5JR642329327Series 5 Hgt-Adj Wksf, 23"D Bubble JettyA5LQ40234023322Series 5 Hgt-Adj Wksf, 90° CornA5JR642929327Series 5 Hgt-Adj Wksf, 29"D Bubble JettyA5LQ46234623322Series 5 Hgt-Adj Wksf, 90° CornA5JR702329327Series 5 Hgt-Adj Wksf, 23"D Bubble JettyA5LQ52235223322Series 5 Hgt-Adj Wksf, 90° EquaA5JR702929327Series 5 Hgt-Adj Wksf, 29"D Bubble JettyA5LQ52235223322Series 5 Hgt-Adj Wksf, 90° EquaA5JR762329327Series 5 Hgt-Adj Wksf, 29"D Bubble JettyA5LQ52235228329Series 5 Base, 90° EqualA5JR762329327Series 5 Hgt-Adj Wksf, 29"D Bubble JettyA5LQ58235823322Series 5 Hgt-Adj Wksf, 90° EquaA5JR762329327Series 5 Hgt-Adj Wksf, 29"D Bubble JettyA5LQ58235823322Series 5 Hgt-Adj Wksf, 90° EquaA5JR762929327Series 5 Hgt-Adj Wksf, 29"D Bubble JettyA5LQ58235823322Series 5 Hgt-Adj Wksf, 90° EquaA5LD40234023322Series 5 Hgt-Adj Wksf, 90° Corner Bi-LevelA5LQ5825829322Series 5 Hgt-Adj Wksf, 90° EquaA5LD46234623322Series 5 Hgt-Adj Wksf, 90° Corner Bi-LevelA5LQ58X58B329Series 5 Base, 90° EqualA5LE40235823323Series 5 Hgt-Adj Wksf, 90° ExtendedA5LQ64236423322Series 5 Hgt-Adj Wksf, 90° Equa	
A5JR642929327Series 5 Hgt-Adj Wksf, 29"D Bubble JettyA5LQ46234623322Series 5 Hgt-Adj Wksf, 90° CornA5JR702329327Series 5 Hgt-Adj Wksf, 23"D Bubble JettyA5LQ52235223322Series 5 Hgt-Adj Wksf, 90° EquaA5JR702929327Series 5 Hgt-Adj Wksf, 29"D Bubble JettyA5LQ52295229322Series 5 Hgt-Adj Wksf, 90° EquaA5JR762329327Series 5 Hgt-Adj Wksf, 29"D Bubble JettyA5LQ52295229322Series 5 Hgt-Adj Wksf, 90° EquaA5JR762329327Series 5 Hgt-Adj Wksf, 29"D Bubble JettyA5LQ5223523329Series 5 Base, 90° EqualA5JR762929327Series 5 Hgt-Adj Wksf, 29"D Bubble JettyA5LQ58235823322Series 5 Hgt-Adj Wksf, 90° EquaA5LD40234023322Series 5 Hgt-Adj Wksf, 90° Corner Bi-LevelA5LQ58295829322Series 5 Hgt-Adj Wksf, 90° EquaA5LD46234623322Series 5 Hgt-Adj Wksf, 90° Corner Bi-LevelA5LQ58X58B329Series 5 Base, 90° EqualA5LE40235823323Series 5 Hgt-Adj Wksf, 90° ExtendedA5LQ64236423322Series 5 Hgt-Adj Wksf, 90° Equa	
A5JR702329327Series 5 Hgt-Adj Wksf, 23"D Bubble JettyA5LQ52235223322Series 5 Hgt-Adj Wksf, 90° EqualA5JR702929327Series 5 Hgt-Adj Wksf, 29"D Bubble JettyA5LQ52295229322Series 5 Hgt-Adj Wksf, 90° EqualA5JR762329327Series 5 Hgt-Adj Wksf, 29"D Bubble JettyA5LQ52235223329Series 5 Hgt-Adj Wksf, 90° EqualA5JR762329327Series 5 Hgt-Adj Wksf, 29"D Bubble JettyA5LQ5223528329Series 5 Base, 90° EqualA5JR762929327Series 5 Hgt-Adj Wksf, 29"D Bubble JettyA5LQ58235823322Series 5 Hgt-Adj Wksf, 90° EqualA5LD40234023322Series 5 Hgt-Adj Wksf, 90° Corner Bi-LevelA5LQ5825829322Series 5 Hgt-Adj Wksf, 90° EqualA5LD46234623322Series 5 Hgt-Adj Wksf, 90° Corner Bi-LevelA5LQ58X58B329Series 5 Base, 90° EqualA5LE40235823323Series 5 Hgt-Adj Wksf, 90° ExtendedA5LQ64236423322Series 5 Hgt-Adj Wksf, 90° Equal	ər
A5JR702929327Series 5 Hgt-Adj Wksf, 29"D Bubble JettyA5LQ52295229322Series 5 Hgt-Adj Wksf, 90° EqualA5JR762329327Series 5 Hgt-Adj Wksf, 23"D Bubble JettyA5LQ52252B329Series 5 Base, 90° EqualA5JR762929327Series 5 Hgt-Adj Wksf, 29"D Bubble JettyA5LQ58235823322Series 5 Hgt-Adj Wksf, 90° EqualA5LD40234023322Series 5 Hgt-Adj Wksf, 90° Corner Bi-LevelA5LQ5825829322Series 5 Hgt-Adj Wksf, 90° EqualA5LD46234623322Series 5 Hgt-Adj Wksf, 90° Corner Bi-LevelA5LQ58X58B329Series 5 Base, 90° EqualA5LE40235823323Series 5 Hgt-Adj Wksf, 90° ExtendedA5LQ64236423322Series 5 Hgt-Adj Wksf, 90° Equal	er
A5JR762329 327 Series 5 Hgt-Adj Wksf, 23"D Bubble Jetty A5LQ52X52B 329 Series 5 Base, 90° Equal A5JR762929 327 Series 5 Hgt-Adj Wksf, 29"D Bubble Jetty A5LQ58235823 322 Series 5 Hgt-Adj Wksf, 90° Equal A5LD40234023 322 Series 5 Hgt-Adj Wksf, 90° Corner Bi-Level A5LQ58235829 322 Series 5 Hgt-Adj Wksf, 90° Equal A5LD46234623 322 Series 5 Hgt-Adj Wksf, 90° Corner Bi-Level A5LQ58X58B 329 Series 5 Base, 90° Equal A5LE40235823 323 Series 5 Hgt-Adj Wksf, 90° Corner Bi-Level A5LQ64236423 322 Series 5 Base, 90° Equal A5LE40235823 323 Series 5 Hgt-Adj Wksf, 90° Extended A5LQ64236423 322 Series 5 Hgt-Adj Wksf, 90° Equal	I
A5JR762929 327 Series 5 Hgt-Adj Wksf, 29"D Bubble Jetty A5LQ58235823 322 Series 5 Hgt-Adj Wksf, 90° Equal A5LD40234023 322 Series 5 Hgt-Adj Wksf, 90° Corner Bi-Level A5LQ58235829 322 Series 5 Hgt-Adj Wksf, 90° Equal A5LD46234623 322 Series 5 Hgt-Adj Wksf, 90° Corner Bi-Level A5LQ58235829 322 Series 5 Hgt-Adj Wksf, 90° Equal A5LD46234623 322 Series 5 Hgt-Adj Wksf, 90° Corner Bi-Level A5LQ58X58B 329 Series 5 Base, 90° Equal A5LE40235823 323 Series 5 Hgt-Adj Wksf, 90° Extended A5LQ64236423 322 Series 5 Hgt-Adj Wksf, 90° Equal	I
A5LD40234023 322 Series 5 Hgt-Adj Wksf, 90° Corner Bi-Level A5LQ58295829 322 Series 5 Hgt-Adj Wksf, 90° Equal A5LD46234623 322 Series 5 Hgt-Adj Wksf, 90° Corner Bi-Level A5LQ58295829 322 Series 5 Hgt-Adj Wksf, 90° Equal A5LE40235823 323 Series 5 Hgt-Adj Wksf, 90° Extended A5LQ64236423 322 Series 5 Hgt-Adj Wksf, 90° Equal	
A5LD46234623 322 Series 5 Hgt-Adj Wksf, 90° Corner Bi-Level A5LQ58X58B 329 Series 5 Base, 90° Equal A5LE40235823 323 Series 5 Hgt-Adj Wksf, 90° Extended A5LQ64236423 322 Series 5 Hgt-Adj Wksf, 90° Equal	I
A5LE40235823 323 Series 5 Hgt-Adj Wksf, 90° Extended A5LQ64236423 322 Series 5 Hgt-Adj Wksf, 90° Equation	I
AELEA0026402 202 Series Ellet Adi What 00% Extended AELOCA006400 202 Series Ellet Adi What 00% Envir	I
: A5LE40236423 323 Series 5 Hgt-Adj Wksf, 90° Extended : A5LQ64296429 322 Series 5 Hgt-Adj Wksf, 90° Equa	I
A5LE40237023 323 Series 5 Hgt-Adj Wksf, 90° Extended A5LQ64T076B 329 Series 5 Base, 90° Extended	
A5LE40237029 324 Series 5 Hgt-Adj Wksf, 90° Boot A5LQ70237023 322 Series 5 Hgt-Adj Wksf, 90° Equa	I
A5LE40237623 323 Series 5 Hgt-Adj Wksf, 90° 23"D Extended A5LQ76237623 322 Series 5 Hgt-Adj Wksf, 90° Equa	I
A5LE40237629 324 Series 5 Hgt-Adj Wksf, 90° Boot A5PE46237029 325 Series 5 Hgt-Adj Wksf, 23"D P-Ta	able
: A5LE40X58B 329 Series 5 Base, 90° Extended : A5PE46237629 325 Series 5 Hgt-Adj Wksf, 23"D P-Ta	able
A5LE40X64T076B 329 Series 5 Base, 90° Extended A5PE58236429 325 Series 5 Hgt-Adj Wksf, 23"D P-Ta	able
: A5LE46235823 323 Series 5 Hgt-Adj Wksf, 90° Extended : A5PE58237029 325 Series 5 Hgt-Adj Wksf, 23"D P-Ta	able
A5LE46236423 323 Series 5 Hgt-Adj Wksf, 90° Extended A5PE58237629 325 Series 5 Hgt-Adj Wksf, 23"D P-Ta	able
: A5LE46237023 323 Series 5 Hgt-Adj Wksf, 90° Extended : A5PE58296429 325 Series 5 Hgt-Adj Wksf, 29"D P-Ta	able
A5LE46237029 324 Series 5 Hgt-Adj Wksf, 90° Boot A5PE58297029 325 Series 5 Hgt-Adj Wksf, 29"D P-Ta	able
: A5LE46237623 323 Series 5 Hgt-Adj Wksf, 90° 23"D Extended : A5PE58297629 325 Series 5 Hgt-Adj Wksf, 23"D P-Ta	able
A5LE46237629 324 Series 5 Hgt-Adj Wksf, 90° Boot A5PE64295823 325 Series 5 Hgt-Adj Wksf, 23"D P-Ta	able
: A5LE46X58B 329 Series 5 Base, 90° Extended : A5PE64295829 325 Series 5 Hgt-Adj Wksf, 29"D P-Ta	able
A5LE46X64T076B 329 Series 5 Base, 90° Extended A5PE70294623 325 Series 5 Hgt-Adj Wksf, 23"D P-Ta	able
A5LE58234023 323 Series 5 Hgt-Adj Wksf, 90° Extended : A5PE70295823 325 Series 5 Hgt-Adj Wksf, 23"D P-Ta	able
A5LE58234623 323 Series 5 Hgt-Adj Wksf, 90° Extended A5PE70295829 325 Series 5 Hgt-Adj Wksf, 29"D P-Ta	able
: A5LE58236423 323 Series 5 Hgt-Adj Wksf, 90° Extended : A5PE76294623 325 Series 5 Hgt-Adj Wksf, 23"D P-Ta	able
A5LE58236429 324 Series 5 Hgt-Adj Wksf, 90° Boot A5PE76295823 325 Series 5 Hgt-Adj Wksf, 23"D P-Ta	able
: A5LE58237023 323 Series 5 Hgt-Adj Wksf, 90° Extended : A5PE76295829 325 Series 5 Hgt-Adj Wksf, 23"D P-Ta	able
A5LE58237029 324 Series 5 Hgt-Adj Wksf, 90° Boot A5RD402929 319 Series 5 Hgt-Adj Wksf, Rectangu	lar Bi-Level
A5LE58237623 323 Series 5 Hgt-Adj Wksf, 90° 23"D Extended A5RD462929 319 Series 5 Hgt-Adj Wksf, Rectangu	lar Bi-Level
A5LE58237629 324 Series 5 Hgt-Adj Wksf, 90° Boot A5RQ342323 319 Series 5 Hgt-Adj Wksf, 23"D Rec	tangular
A5LE58296429 324 Series 5 Hgt-Adj Wksf, 90° Extended A5RQ342929 319 Series 5 Hgt-Adj Wksf, 29"D Rec	tangular
A5LE58297029 324 Series 5 Hgt-Adj Wksf, 90° Extended A5RQ34T04023B 328 Series 5 Base, 23"D Rectangula	
A5LE58297629 324 Series 5 Hgt-Adj Wksf, 90° 29"D Extended A5RQ34T04029B 328 Series 5 Base, 29"D Rectangula	
: A5LE58X64T076B 329 Series 5 Base, 90° Extended : A5RQ402323 319 Series 5 Hgt-Adj Wksf, 23"D Red	tangular
A5LE64234023 323 Series 5 Hgt-Adj Wksf, 90° Extended A5RQ402929 319 Series 5 Hgt-Adj Wksf, 29"D Rec	tangular
: A5LE64234623 323 Series 5 Hgt-Adj Wksf, 90° Extended : A5RQ462323 319 Series 5 Hgt-Adj Wksf, 23"D Rec	tangular
A5LE64235823 323 Series 5 Hgt-Adj Wksf, 90° Extended A5RQ462929 319 Series 5 Hgt-Adj Wksf, 29"D Rec	tangular
: A5LE64295823 324 Series 5 Hgt-Adj Wksf, 90° Boot : A5RQ46T05223B 328 Series 5 Base, 23"D Rectangula	
A5LE64295829 324 Series 5 Hgt-Adj Wksf, 90° Extended A5RQ46T05229B 328 Series 5 Base, 29"D Rectangula	
: A5LE70234023 323 Series 5 Hgt-Adj Wksf, 90° Extended : A5RQ522323 319 Series 5 Hgt-Adj Wksf, 23"D Rec	tangular
A5LE70234623 323 Series 5 Hgt-Adj Wksf, 90° Extended A5RQ522929 319 Series 5 Hgt-Adj Wksf, 29"D Rec	tangular
: A5LE70235823 323 Series 5 Hgt-Adj Wksf, 90° Extended : A5RQ582323 319 Series 5 Hgt-Adj Wksf, 23"D Rec	tangular
A5LE70294023 324 Series 5 Hgt-Adj Wksf, 90° Boot A5RQ5823B 328 Series 5 Base, 23"D Rectangula	
A5LE70294623 324 Series 5 Hgt-Adj Wksf, 90° Boot A5RQ582929 319 Series 5 Hgt-Adj Wksf, 29"D Rec	tangular
A5LE70295823 324 Series 5 Hgt-Adj Wksf, 90° Boot A5RQ5829B 328 Series 5 Base, 29"D Rectangula	
A5LE70295829324Series 5 Hgt-Adj Wksf, 90° ExtendedA5RQ642323319Series 5 Hgt-Adj Wksf, 23"D Red	tangular
A5LE76234023 323 Series 5 Hgt-Adj Wksf, 90° 23"D Extended A5RQ642929 319 Series 5 Hgt-Adj Wksf, 29"D Red	tangular

tyle umber	Page	Description	Style	Page	Description
5RQ64T07623B	328	Series 5 Base, 23"D Rectangular	A7LE54193316B	343	Series 7 Base, 90° Extended
5RQ64T07629B	328	Series 5 Base, 29"D Rectangular	A7LE58187018	339	Series 7 Hgt-Adj Wksf, 90° Taper
5RQ702323	319	Series 5 Hgt-Adj Wksf, 23"D Rectangular	A7LE58193316B	343	Series 7 Base, 90° Extended
RQ702929	319	Series 5 Hgt-Adj Wksf, 29"D Rectangular	[:] A7LE58194016B	343	Series 7 Base, 90° Extended
RQ762323	319	Series 5 Hgt-Adj Wksf, 23"D Rectangular	A7LE58194419B	343	Series 7 Base, 90° Extended
RQ762929	319	Series 5 Hgt-Adj Wksf, 29"D Rectangular	A7LE58234023	338	Series 7 Hgt-Adj Wksf, 90° Extended
RT582329	320	Series 5 Hgt-Adj Wksf, Taper-Flat	A7LE58234623	338	Series 7 Hgt-Adj Wksf, 90° Extended
RT582923	320	Series 5 Hgt-Adj Wksf, Taper-Flat	A7LE58237023	338	Series 7 Hgt-Adj Wksf, 90° Extended
RT642329	320	Series 5 Hgt-Adj Wksf, Taper-Flat	A7LE58237029	339	Series 7 Hgt-Adj Wksf, 90° Boot
RT642923	320	Series 5 Hgt-Adj Wksf, Taper-Flat	A7LE70184618	339	Series 7 Hgt-Adj Wksf, 90° Taper
RT702329	320	Series 5 Hgt-Adj Wksf, Taper-Flat	A7LE70185818	339	Series 7 Hgt-Adj Wksf, 90° Taper
RT702923	320	Series 5 Hgt-Adj Wksf, Taper-Flat	A7LE70234023	338	Series 7 Hgt-Adj Wksf, 90° Extended
RT762329	320	Series 5 Hgt-Adj Wksf, Taper-Flat	A7LE70234623	338	Series 7 Hgt-Adj Wksf, 90° Extended
RT762923	320	Series 5 Hgt-Adj Wksf, Taper-Flat	A7LE70235823	338	Series 7 Hgt-Adj Wksf, 90° Extended
VE34235823	326	Series 5 Hgt-Adj Wksf, 120° Extended	A7LE70294623	339	Series 7 Hgt-Adj Wksf, 90° Boot
VE34236423	326	Series 5 Hgt-Adj Wksf, 120° Extended	A7LE70295823	339	Series 7 Hgt-Adj Wksf, 90° Boot
VE34X58B	329	Series 5 Base, 120° Extended	A7LQ40234023	338	Series 7 Hgt-Adj Wksf, 90° Corner
VE34X64B	329	Series 5 Base, 120° Extended	A7LQ40204020	343	Series 7 Base, 90° Equal
NE40235823	326	Series 5 Hgt-Adj Wksf, 120° Extended	A7LQ46234623	338	Series 7 Hgt-Adj Wksf, 90° Corner
VE40236423	326	Series 5 Hgt-Adj Wksf, 120° Extended	A7LQ58195819B	343	Series 7 Base, 90° Equal
VE40X58B	329	Series 5 Base, 120° Extended	A7LQ58235823	338	Series 7 Hgt-Adj Wksf, 90° Equal
VE40X64B	329	Series 5 Base, 120° Extended	A7LQ70237023	338	Series 7 Hgt-Adj Wksi, 90° Equal
VE46235823	326	Series 5 Hat-Adj Wksf, 120° Extended	A7RQ331919B	342	Series 7 Base, 23"D Rectangular
E46235623	326	Series 5 Hgt-Adj Wksf, 120° Extended	A7RQ332626B	342	Series 7 Base, 25 D Rectangular
	329	Series 5 Base, 120° Extended	•	342	, 0
VE46X64B		,	A7RQ342323		Series 7 Hgt-Adj Wksf, 23"D Rectangula
/E58233423	326	Series 5 Hgt-Adj Wksf, 120° Extended	A7RQ342929	337	Series 7 Hgt-Adj Wksf, 29"D Rectangula
/E58234023	326	Series 5 Hgt-Adj Wksf, 120° Extended	A7RQ371919B	342	Series 7 Base, 23"D Rectangular
E58234623	326	Series 5 Hgt-Adj Wksf, 120° Extended	A7RQ372626B	342	Series 7 Base, 29"D Rectangular
E58236423	326	Series 5 Hgt-Adj Wksf, 120° Extended	A7RQ401919B	342	Series 7 Base, 23"D Rectangular
VE58X64B	329	Series 5 Base, 120° Extended	A7RQ402626B	342	Series 7 Base, 29"D Rectangular
/E64233423	326	Series 5 Hgt-Adj Wksf, 120° Extended	A7RQ422323	337	Series 7 Hgt-Adj Wksf, 23"D Rectangula
/E64234023	326	Series 5 Hgt-Adj Wksf, 120° Extended	A7RQ422929	337	Series 7 Hgt-Adj Wksf, 29"D Rectangula
VE64234623	326	Series 5 Hgt-Adj Wksf, 120° Extended	A7RQ441919B	342	Series 7 Base, 23"D Rectangular
NE64235823	326	Series 5 Hgt-Adj Wksf, 120° Extended	A7RQ442626B	342	Series 7 Base, 29"D Rectangular
NQ34233423	326	Series 5 Hgt-Adj Wksf, 120° Equal	A7RQ462323	337	Series 7 Hgt-Adj Wksf, 23"D Rectangula
VQ40234023	326	Series 5 Hgt-Adj Wksf, 120° Equal	A7RQ462929	337	Series 7 Hgt-Adj Wksf, 29"D Rectangula
Q40X40B	329	Series 5 Base, 120° Equal	A7RQ541919B	342	Series 7 Base, 23"D Rectangular
/Q 46234623	326	Series 5 Hgt-Adj Wksf, 120° Equal	A7RQ542626B	342	Series 7 Base, 29"D Rectangular
/Q46T058B	329	Series 5 Base, 120° Equal/Extended	A7RQ581919B	342	Series 7 Base, 23"D Rectangular
Q52235223	326	Series 5 Hgt-Adj Wksf, 120° Equal	A7RQ582323	337	Series 7 Hgt-Adj Wksf, 23"D Rectangula
Q58235823	326	Series 5 Hgt-Adj Wksf, 120° Equal	A7RQ582626B	342	Series 7 Base, 29"D Rectangular
/Q64236423	326	Series 5 Hgt-Adj Wksf, 120° Equal	A7RQ582929	337	Series 7 Hgt-Adj Wksf, 29"D Rectangul
Q64X64B	329	Series 5 Base, 120° Equal	A7RQ662323	337	Series 7 Hgt-Adj Wksf, 23"D Rectangul
E33165419B	343	Series 7 Base, 90° Extended	A7RQ662929	337	Series 7 Hgt-Adj Wksf, 29"D Rectangul
E33165819B	343	Series 7 Base, 90° Extended	A7RQ702323	337	Series 7 Hgt-Adj Wksf, 23"D Rectangul
E40164419B	343	Series 7 Base, 90° Extended	A7RQ702929	337	Series 7 Hgt-Adj Wksf, 29"D Rectangula
E40165819B	343	Series 7 Base, 90° Extended	A7RQ782323	337	Series 7 Hgt-Adj Wksf, 23"D Rectangul
40235823	338	Series 7 Hgt-Adj Wksf, 90° Extended	A7RQ782929	337	Series 7 Hgt-Adj Wksf, 29"D Rectangula
40237023	338	Series 7 Hgt-Adj Wksf, 90° Extended	A7TG660606H	346	FitWork: Walkstation
E44194016B	343	Series 7 Base, 90° Extended	A7TR383030H	346	FitWork: Walkstation
E44195819B	343	Series 7 Base, 90° Extended	A7TR663232H	346	FitWork: Walkstation
E46187018	339	Series 7 Hgt-Adj Wksf, 90° Taper	A7TR782929H	346	FitWork: Sit-to-Walkstation
E46235823	338	Series 7 Hgt-Adj Wksf, 90° Extended	A7WE33164419B	343	Series 7 Base, 120° Extended
E46237023	338	Series 7 Hgt-Adj Wksf, 90° Extended	A7WE38235423	340	Series 7 Hgt-Adj Wksf, 120° Equal
46237029	339	Series 7 Hgt-Adj Wksf, 90° Boot		343	Series 7 Base, 120° Extended

: Style : Number		Page	Description	: Style : Number	Page	Description
A7WE44	195419 B	343	Series 7 Base, 120° Extended	AFEPPUPDS	405	FO Dual-Sided End Panel w/ Utility Pole
A7WE54	194419 B	343	Series 7 Base, 120° Extended	AFMVINN	431	New York Power Infeed
: A7WE54	233823	340	Series 7 Hgt-Adj Wksf, 120° Equal	AHCC	182, 358	Vertical Cable Carrier
A7WE54	236623	340	Series 7 Hgt-Adj Wksf, 120° Equal	AHORZ25	183, 354	Cableway w/Horizontal Mounting Brkt
A7WE66	235423	340	Series 7 Hgt-Adj Wksf, 120° Equal	AHORZ31	183, 354	Cableway w/Horizontal Mounting Brkt
•	163716B	343	Series 7 Base, 120° Equal	AHORZ37	183, 354	Cableway w/Horizontal Mounting Brkt
•	193719 B	343	Series 7 Base, 120° Equal	AHORZ43	183, 354	Cableway w/Horizontal Mounting Brkt
A7WQ42		340	Series 7 Hgt-Adj Wksf, 120° Extended	AHORZ49	183, 354	Cableway w/Horizontal Mounting Brkt
•	194419B	343	Series 7 Base, 120° Equal	AHORZ55	183, 354	Cableway w/Horizontal Mounting Brkt
A7WQ48		340	Series 7 Hgt-Adj Wksf, 120° Extended	AHORZ61	183, 354	Cableway w/Horizontal Mounting Brkt
•	195419B	343	Series 7 Base, 120° Equal	· AM22	352	22" Modesty Screen
A7WQ54		340	Series 7 Hgt-Adj Wksf, 120° Extended	: AM28	352	28" Modesty Screen
A7WQ66		340 399	Series 7 Hgt-Adj Wksf, 120° Extended Series 8 Dual-Side Base Bench	AM34	352 352	34" Modesty Screen
A8BDS5		399 399	Series 8 Dual-Side Base Bench	· AM40	352	40" Modesty Screen 46" Modesty Screen
A8BDS5		399 399	Series 8 Dual-Side Base Bench	AM40	352	52" Modesty Screen
ABDSS		399	Series 8 Dual-Side Base Bench	- AM52 - AM58	352	58" Modesty Screen
ABDST		399	Series 8 Dual-Side Base Bench	AM64	352	64" Modesty Screen
ASCDS4		399	Series 8 Dual-Side Center Bench		353	22" Modesty and Privacy Screen
ASCDS5		399	Series 8 Dual-Side Center Bench	AMP28	353	28" Modesty and Privacy Screen
A8CDS5		399	Series 8 Dual-Side Center Bench	AMP34	353	34" Modesty and Privacy Screen
ASCDS6	528	399	Series 8 Dual-Side Center Bench	AMP40	353	40" Modesty and Privacy Screen
A8CDS7	128	399	Series 8 Dual-Side Center Bench	AMP46	353	46" Modesty and Privacy Screen
AC25	18	3, 354	Cableway w/Universal Clamp	AMP52	353	52" Modesty and Privacy Screen
AC31	18	3, 354	Cableway w/Universal Clamp	AMP58	353	58" Modesty and Privacy Screen
AC37	18	3, 354	Cableway w/Universal Clamp	AMP64	353	64" Modesty and Privacy Screen
: AC43	18	3, 354	Cableway w/Universal Clamp	: AP22	352	22" Privacy Screen
AC49	18	3, 354	Cableway w/Universal Clamp	AP28	352	28" Privacy Screen
: AC55	18	3, 354	Cableway w/Universal Clamp	AP2D2CC	359	Power/Data w/C-clamp
AC61	18	3, 354	Cableway w/Universal Clamp	AP34	352	34" Privacy Screen
	380, 39	0, 400	Dual-Sided Connection Kit	AP40	352	40" Privacy Screen
		353	28" Modesty Screen w/Cableway	AP46	352	46" Privacy Screen
ACM34		353	34" Modesty Screen w/Cableway	AP52	352	52" Privacy Screen
ACM40		353	40" Modesty Screen w/Cableway	AP58	352	58" Privacy Screen
		353	46" Modesty Screen w/Cableway	: AP64	352	64" Privacy Screen
ACM52		353	52" Modesty Screen w/Cableway	AUPDS	433	Dual-Sided Connection Bench Utility Pole
· ACM58 · ACM64		353 353	58" Modesty Screen w/Cableway 64" Modesty Screen w/Cableway	AWDR	80 359	Victor2 Display 6" Wire Manager
	,	353	28" Modesty and Privacy Screen w/Cableway	- AWM00	359	12" Wire Manager
		353	34" Modesty and Privacy Screen w/Cableway	AWM12	359	18" Wire Manager
ACMP40		353	40" Modesty and Privacy Screen w/Cableway	AWM23	359	23" Wire Manager
ACMP46		353	46" Modesty and Privacy Screen w/Cableway	AWM30	359	30" Wire Manager
ACMP52		353	52" Modesty and Privacy Screen w/Cableway	AWM35	359	35" Wire Manager
ACMP58		353	58" Modesty and Privacy Screen w/Cableway	AWM42	359	42" Wire Manager
ACMP64		353	64" Modesty and Privacy Screen w/Cableway	AWM48	359	48" Wire Manager
ACP28		352	28" Privacy Screen w/Cableway	AWMXL30	358	6"D Wire Manager
ACP34		352	34" Privacy Screen w/Cableway	AWMXL36	358	6"D Wire Manager
ACP40		352	40" Privacy Screen w/Cableway	AWMXL42	358	6"D Wire Manager
ACP46		352	46" Privacy Screen w/Cableway	AWMXL48	358	6"D Wire Manager
ACP52		352	52" Privacy Screen w/Cableway	AWMXL54	358	6"D Wire Manager
ACP58		352	58" Privacy Screen w/Cableway	AWMXL60	358	6"D Wire Manager
ACP64		352	64" Privacy Screen w/Cableway	AWRF254836	79	Victor2 Freestanding Unit
		404	FO Dual-Sided End Panel	AWRF256036	79	Victor2 Freestanding Unit
		405	FO Dual-Sided End Panel w/ Utility Pole	AWRM183636	76	Victor2 Mobile Unit
AFEPPD	S	404	FO Dual-Sided End Panel	AWTS	80	Victor2 Tray Shelf

Resources

Style Number	Page	Description	Style	Page	Description
BAPB2436	302	Airtouch Hgt-Adj Wksf, 120° Equal	CQSC4219	410	Centered Screen
SAPDC2442	302	Airtouch Hgt-Adj Wksf, 90° Corner Bi-Level	CQSC4224	410	24"H Centered Screen
SAPDC2448	302	Airtouch Hgt-Adj Wksf, 90° Corner Bi-Level	CQSF3012	70, 414	12"H Fixed Personal/Modesty Screen
APDS3642	301	Airtouch Hgt-Adj Wksf, Rectangular Bi-Level	CQSF3019	70, 414	19"H Fixed Personal/Modesty Screen
BAPDS3648	301	Airtouch Hgt-Adj Wksf, Rectangular Bi-Level	CQSF3024	70, 414	24"H Fixed Personal/Modesty Screen
BAPSC2442	302	Airtouch Hgt-Adj Wksf, 90° Corner	CQSF3612	70, 414	12"H Fixed Personal/Modesty Screen
BAPSC2448	302	Airtouch Hgt-Adj Wksf, 90° Corner	CQSF3619	70, 414	19"H Fixed Personal/Modesty Screen
BAPSS2442	301	Airtouch Hgt-Adj Wksf, 221/4"D Rectangular	CQSF3624	70, 414	24"H Fixed Personal/Modesty Screen
BAPSS2448	301	Airtouch Hgt-Adj Wksf, 221/4"D Rectangular	CQSF4212	70, 414	12"H Fixed Personal/Modesty Screen
BAPSS2460	301	Airtouch Hgt-Adj Wksf, 221/4"D Rectangular	CQSF4219	70, 414	19"H Fixed Personal/Modesty Screen
SAPSS3042	301	Airtouch Hgt-Adj Wksf, 281/4"D Rectangular	CQSF4224	70, 414	24"H Fixed Personal/Modesty Screen
BAPSS3048	301	Airtouch Hgt-Adj Wksf, 281/4"D Rectangular	CQSF4812	70, 414	12"H Fixed Personal/Modesty Screen
BAPSS3060	301	Airtouch Hgt-Adj Wksf, 281/4"D Rectangular	CQSF4819	70, 414	19"H Fixed Personal/Modesty Screen
BPDSWSPL	438	Power and Data Strip	CQSF4824	70, 414	24"H Fixed Personal/Modesty Screen
CWS18125	178	18" Corner Filler	CR1000	142	Classic Rectangular Keyboard Pltfrm
CWS18150	178	18" Corner Filler	CR10FA	142	Classic Rectangular Keyboard Pltfrm
CWS189	178	18" Corner Filler	CR10FF	142	Classic Rectangular Keyboard Pltfrm
CWS22125	178	22" Corner Filler	CR10PP	142	Classic Rectangular Keyboard Pltfrm
CWS22150	178	22" Corner Filler	CSWP	148	Cushioned Replacement Pad
CWS229	178	22" Corner Filler	CSWPD	148	Cushioned Replacement Pad
DFIS14	178	Freestanding In-Line Document Support	D6	139	Dial Indicator6 Mechanism
F1000	216	CF Series Flat Pnl Monitor Arm, Heavy-Duty	D623	137	Dial Indicator6 Mechanism w/23" Track
F2500	216	CF Series Max-Duty Monitor Arm	D6231710EF	170	Dial Indicator6 KB Assy, Diagonal Pltfrm
F450	216	CF Series Flat Pnl Monitor Arm, Light-Duty	D6231810EF	170	Dial Indicator6 KB Assy, Radius Pltfrm
F500	216	CF Series Light-Duty Monitor Arm	D62319AM00	171	Dial Indicator6 KB Assy, 19" Pltfrm
F800	216	CF Series Flat Pnl Monitor Arm, Standard	D62319AMGG	171	Dial Indicator6 KB Assy, 19" Pltfrm
FDARM	219	CF Series Flat Panel Dual Pole Arm	D62319MD00	171	Dial Indicator6 KB Assy, 19" Pltfrm
FDHA	217	CF Series Flat Pnl Monitor Pole Mount, Dbl	D62319MDGG	171	Dial Indicator6 KB Assy, 19" Pltfrm
FDUALBAR	221	CF Series Dual-Bar Brkt	D62319ML00	171	Dial Indicator6 KB Assy, 19" Pltfrm
FP14	218	CF Series Flat Panel Pole No Arm	D62319MLGG	171	Dial Indicator6 KB Assy, 19" Pltfrm
FP28	218	CF Series Flat Panel Pole No Arm	D62319MR00	171	Dial Indicatoro KB Assy, 19" Pltfrm
FSARM	219	CF Series Single Pole Arm	D62319MRGG	171	Dial Indicator6 KB Assy, 19" Pltfrm
FSHA	215	CF Series Flat Pnl Monitor Pole Mount, Sql	D6232110EF	170	Dial Indicatoro KB Assy, Ta Philin Dial Indicatoro KB Assy, Diagonal Pltfrm
	217	CF Series Flat Phl Monitor Brkt	D623261000	170	
CFSPC CFSPCS	220	CF Series Flat Phi Monitor Brkt	D623261000	172	Dial Indicator6 KB Assy, 26" Pltfrm
FSPC3			D62326102600	172	Dial Indicator6 KB Assy, 26" Pltfrm Dial Indicator6 KB Assy, 26" Pltfrm
CFSPCTM CFSPFO	220 221	CF Series Dsk-Clamp/Grom Thru-Mnt Brkt	•		
		CF Series Flat Pnl Monitor Brkt	D623CR1000	170	Dial Indicator6 KB Assy, Classic Rect Pltfrm
	220	CF Series Max-Duty Arm Brkt	D623CR10FA	170	Dial Indicator6 KB Assy, Classic Rect Pltfrm
FSPSR	220	CF Series Flat Pnl Monitor Brkt	D623CR10FF	170	Dial Indicator6 KB Assy, Classic Rect Pltfrm
FSPSW	220	CF Series Flat Pnl Monitor Brkt	D623CR10PP	170	Dial Indicator6 KB Assy, Classic Rect Pltfrm
FSPTM	220	CF Series Flat Pnl Monitor Brkt	D623EN1000	172	Dial Indicator6 KB Assy, Enviro Pltfrm
		CF Series T-Shape Dual-Base Brkt	D623EN10GG	172	Dial Indicator6 KB Assy, Enviro Pltfrm
FSPWM	220	CF Series Flat Pnl Monitor Brkt	D623JP1000	169	Dial Indicator6 KB Assy, Jules Pltfrm
FTR	179	Adjustable Foot Rest	D623JP10SF	169	Dial Indicator6 KB Assy, Jules Pltfrm
FWM	222	CF Series Wall-Mount Support	D623SL1000	169	Dial Indicator6 KB Assy, Slider Pltfrm
FXT6H	222	CF Series 6"H Flat Pnl Arm Extender	D623SL10DA	169	Dial Indicator6 KB Assy, Slider Pltfrm
MLSA	179	Mobile Collapsible Laptop Support	D623SL10SA	169	Dial Indicator6 KB Assy, Slider Pltfrm
MNB3	179	Monitor Blocks	: DA	148	Deeper Adj Foam Palm Rest
PRCCL	180	Vertical Locking CPU Cradle	DCCLIP	62	SOTO II Cable Clip
PRCCN	180	Vertical Non-Locking CPU Cradle		228	FYI Monitor Arm
PRSL	181	Vert Processor Sling, Freestanding	DFPASINGLECS	227	FYI c:scape Mounting Brkt
CPRSLFO	181	Vert Processor Sling, Fixed	DPHOOK	62	SOTO II Personal Hook
CPUMINI	180	CPU Cradle For Mini Processors	DRCY	41	Wastebasket Recycling Labels
CQSC3619	410	Centered Screen	DSCW20	51	SOTO Cableway
CQSC3624	410	24"H Centered Screen	DSCW30	51	SOTO Cableway

Style Number	Page	Description	: Style : Number	Page	Description
SDFB	54	SOTO Diagonal File Box	FMSC6019	410	Centered 19"H Screen
SDP	64	SOTO II Desk Pad	FMSC6024	410	Centered 24"H Screen
SEE	64	SOTO II Ergo Edge	FMSC6619	410	Centered 19"H Screen
SFS	61	SOTO II Functional Screen	FMSC6624	410	Centered 24"H Screen
SLEDEF	93	SOTO Extended LED Light, Freestanding	FMSC7219	410	Centered 19"H Screen
SLEDER	93	SOTO Extended LED Light, Rail-Mount	FMSC7224	410	Centered 24"H Screen
SLEDF	92	SOTO LED Task Light, Freestanding	FMSK2	411	Centered Screen Custom Insert Kit
SLEDR	92	SOTO LED Task Light, Rail-Mount	FMSK3	411	Centered Screen Custom Insert Kit
SLLB	53	SOTO Landscape Letter Box	FMVB	434	Block-to-Block Connector
SLPDS	61	SOTO II Launch Pad Div Screen	FMVCE	435	Vertebral Riser
SLPLNP	60	SOTO II Launch Pad	FMVCP	426	Chicago Hardwire Box
SLPLP	60	SOTO II Launch Pad	FMVF	428	Filler Package – Power/Data
SLS	63	SOTO II Freestand Laptop Shelf	FMVH30	429	Modular Harness
SLSRM	63	SOTO II Rail-Mount Laptop Shelf	FMVH36	429	Modular Harness
SMB	63 62		FMVH39	429	Modular Harness Modular Harness
		SOTO II Monitor Bridge	•		
SMC	60	SOTO II Mobile Caddy	FMVH42	429	Modular Harness
SPB	54	SOTO Personal Box	FMVH45	429	Modular Harness
SPP	61	SOTO II Personal Pocket	FMVH48	429	Modular Harness
SR28	49	28" SOTO Rail	FMVH51	429	Modular Harness
SR34	49	34" SOTO Rail	FMVH54	429	Modular Harness
SR40	49	40" SOTO Rail	FMVH57	429	Modular Harness
SR46	49	46" SOTO Rail	: FMVH60	429	Modular Harness
SR52	49	52" SOTO Rail	FMVH63	429	Modular Harness
SR58	49	58" SOTO Rail	FMVH66	429	Modular Harness
SR64	49	64" SOTO Rail	FMVH69	429	Modular Harness
SRT52	50	52" SOTO Tour Rail	FMVH72	429	Modular Harness
SRT58	50	58" SOTO Tour Rail	FMVH75	429	Modular Harness
SRT64	50	64" SOTO Tour Rail	FMVI12H	430	Hardwire-to-Modular Power Infeed
SSA1410	52	SOTO Shelf	FMVI12M	430	Modular-to-Modular Power Infeed
SSA1410H	52	SOTO Shelf	FMVI24H	430	Hardwire-to-Modular Power Infeed
SSA143	52	SOTO Shelf	FMVI24M	430	Modular-to-Modular Power Infeed
SSA143H	52	SOTO Shelf	FMVI6H	430	Hardwire-to-Modular Power Infeed
SSA146	52	SOTO Shelf	FMVI6M	430	Modular-to-Modular Power Infeed
SSA146H	52	SOTO Shelf	FMVISS	431	San Francisco Power Infeed
SSA2410	52	SOTO Shelf	FMVISS	432	Junction Box Faceplate – Modular
SSA2410	52	SOTO Shelf	FMVPBH	432	Modular Power Block – High-Capacity
SSA2410H	52	SOTO Shelf	FMVPBS	420	Modular Power Block – High-Capacity Modular Power Block – Standard-Capacit
		SOTO Shelf	•		•
SSA246H	52		FMVPDS	438	Power Strip
SSA363	52	SOTO Shelf	: FMVPS	438	Power Strip
SSA363H	52	SOTO Shelf	FMVRD	427	Duplex Receptacle
SSB	55	SOTO Storage Box Shelf Set of 3	· FMVRF	428	Flexible Receptacle
SSPB	53	SOTO Pile Box	FOCSML00	147	FrameOne/c:scape Keyboard Pltfrm
STB	53	SOTO Tool Box	FOCSMLGG	147	FrameOne/c:scape Keyboard Pltfrm
SUB	54	SOTO Utility Box	FOCSMR00	147	FrameOne/c:scape Keyboard Pltfrm
SUSB	63	SOTO II USB Charging Station	FOCSMRGG	147	FrameOne/c:scape Keyboard Pltfrm
VSS2912	67	Divisio Side Screen	FPAC1CC	190	Eyesite Sgl Display Support, Std Crank A
WBE	41	Wastebasket	FPAC1CS	190	Eyesite Sgl Display Support, Std Crank A
F	151	Extended Foam Palm Rest	FPAC1FO	191	Eyesite Sgl Display Support, Std Crank A
N1000	146	Enviro Keyboard Pltfrm	FPAC1TM	191	Eyesite Sgl Display Support, Std Crank A
N10GG	146	Enviro Keyboard Pltfrm	FPAC2BBDCC	198	Eyesite Two-Over-Two Display
A	150	Full-Width, Hgt-Adj Palm Rest	FPAC2BBDTM	198	Eyesite Two-Over-Two Display
F	150	Full-Width, Fixed-Hgt Palm Rest	FPAC2BBSCC	199	Eyesite Static One-Over-One Disp Suppo
MAS	411	Aligners	FPAC2BBSFO	199	Eyesite Static One-Over-One Disp Suppo
MSC4819	410	Centered 19"H Screen	FPAC2BBSTM	199	Eyesite Static One-Over-One Disp Suppo
MSC4824	410	Centered 24"H Screen	FPAC2CC	192	Eyesite Dual Display Support, Std Crank
	410		· FFA0200	192	Lycone Dual Display Support, Stu Clark

Style Number	Page	Description	: Style : Number :	Page	Description
FPAC2CS	192	Eyesite Dual Display Support, Std Crank Adj	FPASYNCLED	223, 232	LED w/bracket, Sync
PAC2FO	193	Eyesite Dual Display Support, Std Crank Adj	FPASYNCMT	231	FYI Sync Hardware Pack
PAC2TM	193	Eyesite Dual Display Support, Std Crank Adj	FPASYNCSWR	231	FYI Sync Lower Monitor Arm, Sltwl/Sltrl
PAC3BBSCC	200	Eyesite Mounting Brkt, FrameOne	FPASYNCU	231	FYI Sync Upper Monitor Arm
PAC3BBSFO	200	Eyesite Mounting Brkt, FrameOne	FPATILTPAN	230	FYI Tilt/Pan
PAC3BBSTM	200	Eyesite Mounting Brkt, FrameOne	FPAUPPER	229	FYI Upper Arm
PADUALCC	228	C-clamp Mounting Bracket	FPAWALL	230	FYI Flat Pnl Monitor Arm Brkt, Wall-Mt
	228	Through-Mount Mounting Bracket	FPC1	206	Eyesite Single Arm Assembly
PAEC1BIVI	191	Eyesite Sgl Display Support, Ext Crank Adj	FPC2	206	Eyesite Dual Yolk Arm Assembly
	191	Eyesite Sgl Display Support, Ext Crank Adj	FPC2SB	206	Eyesite Dual Static Yoke
	191	Eyesite Sgl Display Support, Ext Crank Adj	FPC3	206	Eyesite Triple Yolk Arm Assembly
PAEC1FO	191	Eyesite Sgl Display Support, Ext Crank Adj		210	Eyesite Mounting Brkt, Bivi
	191	Eyesite Sgl Display Support, Ext Crank Adj	FPCCC	210	Eyesite Mounting Brkt, C-clamp
PAEC2BIVI	193	Eyesite Dual Display Support, Ext Crank Adj		210	Eyesite Mounting Brkt, c:scape
PAEC2CC PAEC2CS	193 193	Eyesite Dual Display Support, Ext Crank Adj	FPCECC	207 207	Eyesite 18" Extended Crank Column
PAEC2CS PAEC2FO	193	Eyesite Dual Display Support, Ext Crank Adj Eyesite Dual Display Support, Ext Crank Adj	FPCESC	207	Eyesite 26" Extended Static Column Eyesite Mounting Brkt, FrameOne
PAEC2FO PAEC2TM	193	Eyesite Dual Display Support, Ext Crank Adj	FPCFU	208	Eyesite VESA Brkt Assembly
PAELC1BIVI	203	Evesite Flat Pnl Mon Arm w/Sql Lptp Sprt	FPCHTV	200	Eyesite VESA Brkt/Hook
PAELC1CC	203	Eyesite Flat Pnl Mon Arm w/Sgl Lptp Sprt	FPCL	208	Eyesite Laptop Component
PAELC1CS	203	Eyesite Flat Pnl Mon Arm w/Sgl Lptp Sprt	FPCL1	206	Eyesite Single Arm
PAELC1FO	203	Evesite Flat Pnl Mon Arm w/Sql Lptp Sprt	FPCSCC	207	Eyesite 12" Standard Crank Column
PAELC1TM	203	Eyesite Flat Pnl Mon Arm w/Sgl Lptp Sprt	FPCTM	210	Eyesite Mounting Brkt, Through Mount
PAELC2BIVI	205	Eyesite Flat Pnl Mon Arm w/Dual Lptp Sprt	FPVSCCTM	237	Volley Flat Panel Arms
PAELC2CC	205	Eyesite Flat Pnl Mon Arm w/Dual Lptp Sprt	FPVSSW	237	Volley Flat Panel Arms
PAELC2CS	205	Eyesite Flat Pnl Mon Arm w/Dual Lptp Sprt	FTH	42	Flat Top Hanger
PAELC2FO	205	Eyesite Flat Pnl Mon Arm w/Dual Lptp Sprt	FWKB18	349	FitWork: Kybun Footpad
PAELC2TM	205	Eyesite Flat Pnl Mon Arm w/Dual Lptp Sprt	GG	149	19" Green-Gel Palm Rest
PAFC3CC	194	Eyesite Triple Display Support, Std Crank Adj	HCCHT	38	Chart/File Holder
PAFC3CS	194	Eyesite Triple Display Support, Std Crank Adj	HCCPUS	182	Slatwall/SlatRail Mounted CPU Cradle
РАГСЗТМ	194	Eyesite Triple Display Support, Std Crank Adj	HCGB	39	Glove Box
PAFEC3CC	195	Eyesite Triple Display Support, Ext Crank Adj	JP1000	141	Jules Keyboard Pltfrm
PAFEC3CS	195	Eyesite Triple Display Support, Ext Crank Adj	JP10SF	141	Jules Keyboard Pltfrm
PAFEC3TM	195	Eyesite Triple Display Support, Ext Crank Adj	KCR	41	Cable Rings
PAHANDLE	231	FYI Sync Handle	KMINI	36	Mini Shelf
PALC1CC	202	Eyesite Flat Pnl Mon Arm w/Sgl Lptp Sprt	: L5	138	5" Lift & Lock Mechanism
PALC1CS	202	Eyesite Flat Pnl Mon Arm w/Sgl Lptp Sprt	L523	136	5" Lift & Lock Mechanism w/23" Track
PALC1FO	202	Eyesite Flat Pnl Mon Arm w/Sgl Lptp Sprt	L5231710EF	162	5" Lift & Lock KB Assy, Diagonal Pltfrm
PALC1TM	202	Eyesite Flat Pnl Mon Arm w/Sgl Lptp Sprt	L5231810EF	162	5" Lift & Lock KB Assy, Radius Pltfrm
PALC2CC	204	Eyesite Flat Pnl Mon Arm w/Dual Lptp Sprt	L52319AM00	163	5" Lift & Lock KB Assy, 19" Pltfrm
PALC2CS	204	Eyesite Flat Pnl Mon Arm w/Dual Lptp Sprt	L52319AMGG	163	5" Lift & Lock KB Assy, 19" Pltfrm
PALC2FO	204	Eyesite Flat Pnl Mon Arm w/Dual Lptp Sprt	L52319MD00	163	5" Lift & Lock KB Assy, 19" Pltfrm
PALC2TM	204	Eyesite Flat Pnl Mon Arm w/Dual Lptp Sprt	L52319MDGG	163	5" Lift & Lock KB Assy, 19" Pltfrm
PALED	223, 232	LED w/bracket, CF Series/FYI	L52319ML00	163	5" Lift & Lock KB Assy, 19" Pltfrm
PAS101	209	Eyesite Modular Assy, Ext Static Column	L52319MLGG	163	5" Lift & Lock KB Assy, 19" Pltfrm
PAS101CC	196	Eyesite Static One-Over-One Disp Support	L52319MR00	163	5" Lift & Lock KB Assy, 19" Pltfrm
PAS101CS	196	Eyesite Static One-Over-One Disp Support	L52319MRGG	163	5" Lift & Lock KB Assy, 19" Pltfrm
PAS101F0	197	Eyesite Static One-Over-One Disp Support	L5232110EF	162	5" Lift & Lock KB Assy, Diagonal Pltfrm
PAS101TM	197	Eyesite Static One-Over-One Disp Support	L523261000	164	5" Lift & Lock KB Assy, 26" Pltfrm
PASINGLE	229	FYI Flat Pnl Monitor Arm	L523261026G0		5" Lift & Lock KB Assy, 26" Pltfrm
PASINGLECC		FYI C-clamp Mounting Brkt	L5232610GG	164	5" Lift & Lock KB Assy, 26" Pltfrm
PASINGLEFO		FYI FrameOne Mounting Brkt	L523CR1000	162	5" Lift & Lock KB Assy, Classic Rect Pltfr
PASINGLETM		FYI Through Mount Mounting Brkt	L523CR10FA	162	5" Lift & Lock KB Assy, Classic Rect Pltf
PASWR	230	FYI Flat Pnl Monitor Arm Brkt, Sltwl/Sltrl	L523CR10FF	162	5" Lift & Lock KB Assy, Classic Rect Pltfr
PASYNCL	231	FYI Sync Lower Monitor Arm	L523CR10PP	162	5" Lift & Lock KB Assy, Classic Rect Pltfr

Style Number	Page	Description	: Style : Number	Page	Description
.523EN1000	164	5" Lift & Lock KB Assy, Enviro Pltfrm	LELSA	100	Elsa Task Light, Pnl-Mount
523EN10GG	164	5" Lift & Lock KB Assy, Enviro Pltfrm	LELSAN	100	Elsa Task Light, Pnl-Mount
523JP1000	161	5" Lift & Lock KB Assy, Jules Pltfrm	LELSCP	100	Elsa Task Light, C-clamp Mount
.523JP10SF	161	5" Lift & Lock KB Assy, Jules Pltfrm	LELSE	100	Elsa Task Light, Pnl-Mount
.523SL1000	161	5" Lift & Lock KB Assy, Slider Pltfrm	LELSF	100	Elsa Task Light, Freestanding
.523SL10DA	161	5" Lift & Lock KB Assy, Slider Pltfrm		100	Elsa Task Light, Slatwall/SlatRail Mount
L523SL10SA	161	5" Lift & Lock KB Assy, Slider Pltfrm	LMINILED	96	Mini SOTO LED Light
L7	138	7" Lift & Lock Mechanism		97	Mini SOTO Extended LED Light
.726	137	7" Lift & Lock Mechanism w/26" Track		104	Pisa Task Light
.7261710EF	166	7" Lift & Lock KB Assy, Diagonal Pltfrm	. PP	151	Positionable Palm Rest
L7261810EF	166	7" Lift & Lock KB Assy, Radius Pltfrm	PPS6SP	106, 360	PowerPincher w/Occupancy Sensor
72619AM00	167	7" Lift & Lock KB Assy, 19" Pltfrm	Q11T	139	11" Track
L72619AMGG	167	7" Lift & Lock KB Assy, 19" Pltfrm	Q12T	139	12" Track
L72619MD00	167	7" Lift & Lock KB Assy, 19" Pltfrm	Q17T	139	17" Track
L72619MDGG	167	7" Lift & Lock KB Assy, 19" Pltfrm	Q18T	139	18" Track
L72619MDGG	167	7" Lift & Lock KB Assy, 19" Pittim 7" Lift & Lock KB Assy, 19" Pittim	Q20T	139	20" Track
L72619ML00	167	7" Lift & Lock KB Assy, 19" Pittim	Q22T	139	22" Track
L72619MLGG	167	7" Lift & Lock KB Assy, 19" Pittim 7" Lift & Lock KB Assy, 19" Pittim	Q23T	139	23" Track
		7" Lift & Lock KB Assy, 19" Pitirm			26" Track
L72619MRGG	167		Q26T	139	
L7262110EF	166	7" Lift & Lock KB Assy, Diagonal Pltfrm		181	CPU Trolley
L726261000	168	7" Lift & Lock KB Assy, 26" Pltfrm	SA	148	Standard Adj Foam Palm Rest
L726261026GG	168	7" Lift & Lock KB Assy, 26" Pltfrm	: SE	138	Stella Ext Mechanism
.7262610GG	168	7" Lift & Lock KB Assy, 26" Pltfrm	SE23	136	Stella Ext Mechanism w/23" Track
.726CR1000	166	7" Lift & Lock KB Assy, Classic Rect Pltfrm	SE231710EF	158	Stella Ext KB Assy, Diagonal Pltfrm
.726CR10FA	166	7" Lift & Lock KB Assy, Classic Rect Pltfrm	SE231810EF	158	Stella Ext KB Assy, Radius Pltfrm
.726CR10FF	166	7" Lift & Lock KB Assy, Classic Rect Pltfrm	SE2319AM00	159	Stella Ext KB Assy, 19" Pltfrm
.726CR10PP	166	7" Lift & Lock KB Assy, Classic Rect Pltfrm	SE2319AMGG	159	Stella Ext KB Assy, 19" Pltfrm
.726EN1000	168	7" Lift & Lock KB Assy, Enviro Pltfrm	SE2319MD00	159	Stella Ext KB Assy, 19" Pltfrm
.726EN10GG	168	7" Lift & Lock KB Assy, Enviro Pltfrm	SE2319MDGG	159	Stella Ext KB Assy, 19" Pltfrm
L726JP1000	165	7" Lift & Lock KB Assy, Jules Pltfrm	SE2319ML00	159	Stella Ext KB Assy, 19" Pltfrm
.726JP10SF	165	7" Lift & Lock KB Assy, Jules Pltfrm	SE2319MLGG	159	Stella Ext KB Assy, 19" Pltfrm
L726SL1000	165	7" Lift & Lock KB Assy, Slider Pltfrm	SE2319MR00	159	Stella Ext KB Assy, 19" Pltfrm
L726SL10DA	165	7" Lift & Lock KB Assy, Slider Pltfrm	SE2319MRGG	159	Stella Ext KB Assy, 19" Pltfrm
L726SL10SA	165	7" Lift & Lock KB Assy, Slider Pltfrm	SE232110EF	158	Stella Ext KB Assy, Diagonal Pltfrm
LDASHC	86	dash LED Light, C-clamp Mount	SE23261000	160	Stella Ext KB Assy, 26" Pltfrm
DASHF	86	dash LED Light, Freestanding	SE23261026GC	1 60	Stella Ext KB Assy, 26" Pltfrm
DASHMINIC	88	dash mini LED Light, C-clamp Mount	SE232610GG	160	Stella Ext KB Assy, 26" Pltfrm
DASHMINIF	88	dash mini LED Light, Freestanding	SE23CR1000	158	Stella Ext KB Assy, Classic Rect Pltfrm
DASHMINIOC	89	dash mini LED Light, C-clamp Mount	SE23CR10FA	158	Stella Ext KB Assy, Classic Rect Pltfrm
DASHMINIOF	89	dash mini LED Light, Freestanding	SE23CR10FF	158	Stella Ext KB Assy, Classic Rect Pltfrm
DASHMINIOP	89	dash mini LED Light, Pnl-Mount	SE23CR10PP	158	Stella Ext KB Assy, Classic Rect Pltfrm
DASHMINIOR	89	dash mini LED Light, Rail-Mount	SE23EN1000	160	Stella Ext KB Assy, Enviro Pltfrm
DASHMINIOS	89	dash mini LED Light, Slatwall/SlatRail Mount	SE23EN10GG	160	Stella Ext KB Assy, Enviro Pltfrm
DASHMINIP	88	dash mini LED Light, Phl-Mount	SE23JP1000	157	Stella Ext KB Assy, Jules Pltfrm
DASHMINIR	88	dash mini LED Light, Rail-Mount	SE23JP10SF	157	Stella Ext KB Assy, Jules Pltfrm
DASHMINIS	88	dash mini LED Light, Slatwall/SlatRail Mount	SE23SL1000	157	Stella Ext KB Assy, Slider Pltfrm
DASHOC	87	dash LED Light, C-clamp Mount	SE23SL10DA	157	Stella Ext KB Assy, Slider Pltfrm
DASHOE	87	dash LED Light, Freestanding	SE23SL10DA	157	Stella Ext KB Assy, Slider Pltfrm
	87 87	dash LED Light, Preestanding dash LED Light, Pnl-Mount	SF	157	Stendard Foam Palm Rest
		-	•		
LDASHOR	87	dash LED Light, Rail-Mount	SL1000	140	Slider Keyboard Pltfrm
DASHOS	87	dash LED Light, Slatwall/SlatRail Mount	SL10DA	140	Slider Keyboard Pltfrm
LDASHP	86	dash LED Light, Pnl-Mount	SL10SA	140	Slider Keyboard Pltfrm
LDASHR	86	dash LED Light, Rail-Mount	SMPRS	149	Slider Mousing Surface Palm Rest
LDASHS	86	dash LED Light, Slatwall/SlatRail Mount	SS	137	Stella Standard Mechanism
LELS9	100	Elsa Task Light, Pnl-Mount	SS11FCMLGG	156	Stella Std KB Assy, FrameOne/c:scape Plt

ityle lumber	Page	Description	: Style : Number	Page	Description
S11FCMRGG	156	Stella Std KB Assy, FrameOne/c:scape Pltfrm	WLG15L	32	Landscape Legal Tray
S17FCMLGG	156	Stella Std KB Assy, FrameOne/c:scape Pltfrm	WLT12L	32	Landscape Letter Tray
S17FCMRGG	156	Stella Std KB Assy, FrameOne/c:scape Pltfrm	WLTS	32	Portrait Letter Tray
S20	136	Stella Std Mechanism w/20" Track	WMB	40	Markerboard
S201710EF	153	Stella Std KB Assy, Diagonal Pltfrm	WOFS	36	Office in a File
S201810EF	153	Stella Std KB Assy, Radius Pltfrm	WPCS	35	Pen/Pencil Cup
S2019AM00	154	Stella Std KB Assy, 19" Pltfrm	WPFS	33	PaperFlo Manager
S2019AMGG	154	Stella Std KB Assy, 19" Pltfrm	WS24	17	12"H Slatwall Tile
S2019MD00	154	Stella Std KB Assy, 19" Pltfrm	WS2418H	17	18"H Slatwall Tile
S2019MDGG	154	Stella Std KB Assy, 19" Pltfrm	WS30	17	12"H Slatwall Tile
S2019ML00	154	Stella Std KB Assy, 19" Pltfrm	WS3018H	17	18"H Slatwall Tile
S2019MLGG	154	Stella Std KB Assy, 19" Pltfrm	WS36	17	12"H Slatwall Tile
S2019MR00	154	Stella Std KB Assy, 19" Pltfrm	WS3618H	17	18"H Slatwall Tile
S2019MRGG	154	Stella Std KB Assy, 19" Pltfrm	WS42	17	12"H Slatwall Tile
S202110EF	153	Stella Std KB Assy, Diagonal Pltfrm	WS4218H	17	18"H Slatwall Tile
S20261000	155	Stella Std KB Assy, 26" Pltfrm	WS45	17	12"H Slatwall Tile
			WS4518H	17	18"H Slatwall Tile
S20261026GG	155	Stella Std KB Assy, 26" Pltfrm	•		
S202610GG	155	Stella Std KB Assy, 26" Pltfrm	: WS48	17	12"H Slatwall Tile
S20CR1000	153	Stella Std KB Assy, Classic Rect Pltfrm	WS4818H	17	18"H Slatwall Tile
S20CR10FA	153	Stella Std KB Assy, Classic Rect Pltfrm	: WS60	17	12"H Slatwall Tile
S20CR10FF	153	Stella Std KB Assy, Classic Rect Pltfrm	WS6018H	17	18"H Slatwall Tile
S20CR10PP	153	Stella Std KB Assy, Classic Rect Pltfrm	WSPS	38	Personal Shelf
S20EN1000	155	Stella Std KB Assy, Enviro Pltfrm	WSQS	35	Double Square Dish
S20EN10GG	155	Stella Std KB Assy, Enviro Pltfrm	WSR24	23	24" SlatRail
S20JP1000	152	Stella Std KB Assy, Jules Pltfrm	WSR30	23	30" SlatRail
S20JP10SF	152	Stella Std KB Assy, Jules Pltfrm	WSR36	23	36" SlatRail
S20SL1000	152	Stella Std KB Assy, Slider Pltfrm	: WSR42	23	42" SlatRail
S20SL10DA	152	Stella Std KB Assy, Slider Pltfrm	WSR48	23	48" SlatRail
S20SL10SA	152	Stella Std KB Assy, Slider Pltfrm	WSR60	23	60" SlatRail
APB2436	306	Airtouch Hgt-Adj Wksf, 120° Equal	WSRFS	22	Freestanding SlatRail Stanchions
APDC2442	306	Airtouch Hgt-Adj Wksf, 90° Corner Bi-Level	WSRU1	24	SlatRail Pnl-Mount Brkts
APDC2448	306	Airtouch Hgt-Adj Wksf, 90° Corner Bi-Level	WSRW	24	SlatRail Wall-Mount Brkts
APDS3642	305	Airtouch Hgt-Adj Wksf, Rectangular Bi-Level	WSS12L	37	Slatshelf, Landscape
APDS3648	305	Airtouch Hgt-Adj Wksf, Rectangular Bi-Level	WSS18L	37	Slatshelf, Landscape
APSC1842	306	Airtouch Hgt-Adj Wksf, 90° Corner	WSS18P	37	Slatshelf, Portrait
APSC2442	306	Airtouch Hgt-Adj Wksf, 90° Corner	WSS24L	37	Slatshelf, Landscape
APSC2448	306	Airtouch Hgt-Adj Wksf, 90° Corner	WSS24P	37	Slatshelf, Portrait
APSS2442	305	u	WSSD	38	Slatshelf Dividers
APSS2442		Airtouch Hgt-Adj Wksf, 221/4"D Rectangular	WSSL		
	305	Airtouch Hgt-Adj Wksf, 221/4"D Rectangular	•	37	Slatshelf Labels
APSS2460	305	Airtouch Hgt-Adj Wksf, 221/4"D Rectangular	WSW42AN	18	Slatwall Brkt, 12"H Pnl-Mount
APSS3042	305	Airtouch Hgt-Adj Wksf, 28 ¹ /4"D Rectangular	· WSW42AV	18	Slatwall Brkt, 12"H Pnl-Mount
APSS3048	305	Airtouch Hgt-Adj Wksf, 28 ¹ /4"D Rectangular	: WSW42S9	18	Slatwall Brkt, 12"H Pnl-Mount
APSS3060	305	Airtouch Hgt-Adj Wksf, 28 ¹ /4"D Rectangular	WSWANS	18	Slatwall Brkt, 12"H Pnl-Mount
TTRC	439	Cord and Plug	WSWANS18	18	Slatwall Brkt, 18"H Pnl-Mount
TTRCN	439	Cord and Plug	WSWM	19	Slatwall Brkt, 12"H Wall-Mount
BHS	33	Binder Holder		19	Slatwall Brkt, 18"H Wall-Mount
BSXS	16	Context Slatwall Stanchions	WSWPBOF12	19	Slatwall Brkt, 12"H Wall-Mount
СН	41	Coat Hook	WSWUSA	18	Slatwall Brkt, 12"H Pnl-Mount
/DPDL	42	Pelican Pencil Drawer, Locking	WSWUSA18	18	Slatwall Brkt, 18"H Pnl-Mount
/DPDNL	42	Pelican Pencil Drawer, Non-Locking	WTBS	39	Tackstrip
/DPL	42	Pelican Pencil Drawer, Security Lid	WTCS	39	Telephone Caddy
/FCS	16	Freestanding Slatwall Stanchions	wus	34	Universal Shelf, Single
/НВ	34	Hanging Brackets	WUS3	34	Universal Shelves, 3-Pack
иноок	40	Utility Hook	WWT	40	Work Tags
ЛВ	43	Pelican Installation Bar	•		-

Trademark List

- The following are registered trademarks for products of Steelcase Inc. or one of its related corporate entities: 4 o'clock, 900 Series, à la carte, Airtouch, Ally, Amia, Answer, Archipelago, Avenir, Ballet, Bix, Brayton International, Cachet, Canopy, Canto, Chancellor, Coalesse, Confidante, Context, Convene, CopyCam, Criterion, Crushed Can, Currency, dash, Designtex, Details, Detour, Drive, Elective Elements, Ellipse, Ember Chrome, Emerge, E-Table 2, FYI, Garland, Gentry, Ginkgo Biloba, Groupwork, Ideo, Jacket, Jenny, Jersey, Kart, Kick, LaCosta, Leap, Let's B. LiveBack, Max-Stacker, media:scape, Metro, Migrations, Mitra, Montage, Nurture, Oriana, Parade, Pathways, PCT, Permiso, Player, PolyVision, Portal, Power Pincher, Progeny, Protégé, R2, Rally, Relevant, Reply, Rizzi Arc, Sensor, Series 9000, Siento, Sieste, Sine, Softcare, Springboard, Steelcase, Steelcase Design Partnership, Stella, Stow Davis, Swathmore, TeamWork, Technique, Texpress, Think, Thunder, Topo, Train, Turnstone, Underline, Unison, Vecta, Viridian, Walden, Werndl, and X-Stack
- The following registered trademarks are under license from AWI Licensing Company, Dover, DE: SoundScapes, DuraBrite, BioBlock, and Armstrong.
- The following registered trademarks are under license from Byrne Electrical, Rockford, MI: Interport, Mini-Port, Axil Z, and Ellora.
- ® The following is a registered trademark of DuPont, Wilmington, DE: Corian.
- The following is a registered trademark of Genlyte Thomas Company, Louisville, KY: Lightolier.
- The following is a registered trademark of Hilti Corporation, FL-9494 Schaan, Principality of Liechtenstein: Hilti.
- The following is a registered trademark of Leviton Manufacturing Company, Little Neck, NY: Decora.
- The following is a registered trademark of Mechanical Plastics Corp, Elmsford, NY: Toggler.
- [®] The following is a registered trademark of Microsoft Corporation, Redmond, WA: Microsoft.
- [®] The following is a registered trademark of Panduit Corporation, Lockport, IL: Panduit.
- [®] The following is a registered trademark of Trav (Press), Cuneo, Italy: Assisa.
- [®] The following is a registered trademark of Virtual Ink, Boston, MA: mimioActive.
- The following registered trademarks are under license from Wilkhahn Furniture Products: Avera, Senzo, Versal, and Wilkhahn FS.
- The following is a registered trademark of Wilsonart International, Temple, TX: Chemsurf.

- The following is a registered trademark of Wiremold, West Hartford, CT: Wiremold.
- [®] The following is a registered trademark of EMU Group S.P.A., Perugia, Italy: Emu.
- The following are trademarks for products of Steelcase Inc. or one of its related corporate entities: Access, Active/Passive Shelf, Ainsley, Akira, Alcove, Alerion, alight, Amaris, American Elect, American Tradition, ap40, Arbor, Arriva, Asana, Ascot, Aspekt, Astor, Await, Bira, Bivi, Bottomline, Brook, Buoy, Burton, c:scape, Calla, Calm, Camber, Campfire, Capa, Cappuccino, Cesar, Chester, Chord, Circa, Clarendon, Classic Rectangular, cobi, Collaboration, Community, Company, Convey, Cortex, Coupe, Crea, Crew, Cura, Cypress, Davenport, Dearborn, Deck, Déjà, Denizen, Denska, Derby, Divisio, Donovan, Dune, Duo, e3, e3 ceramicsteel, e3 environmental ceramicsteel, Echo, Edge, Elsna, Empath, Empress, Enea, eno, EnSync, Enviro, Escapade, Exchange, Exponents, Field, Flat Top, FlexFrame, Flip Top, Flute, Folio, FrameOne, FreeFlow, Frontier, Galilei, Gesture, Ginger, Ginkgo, Go Wall, Grip, Groove, Hatchback, Hawthorne, Hitch, Host Collection, Hosu, Huddleboard, i2i, Impact, Indy, InfoLink, IOS, I-Solve, Jack, Jarrah, Jetty, Juice, Kami, Kast, Kathryn, Lagunitas, Lark, L'Attitude, LearnLab, Leela, Lincoln, Linden, LiveSeat, Loria, Lyric, Malibu, Malibu Too, Mansfield, Marathon, Martini, Mason, Masque, Millbrae, Mineral, Mingle, Mistic, Mistic Metal, Mistic Wood, Montreal, Move, Nadia, Neighbor, nesso, Nickel, Nikko, Nod, Node, Norfolk, Ontrak, Oom, Opus, Orchid, Outlook Collection, Ovation, Paloma, Paperflo, Parliament, Pasio, Passerelle, Patriarch, Payback, Peek, Pile File, Pisa, Pool, PUCK, QiVi, Quba, Rave, Reed, Regard, Relay, Reunion, Ripple, Riser, Rocco, Rocky, RoomWizard, Runner, Satellite, Sawyer, ScapeSeries, Senti, Sentinel, Senza, Sequoia, Session, ShareLink, Shield, Shortcut, Sidewalk, Skylar, Slumber, Smoke, Snug, Soft Leaf, Sonata, Sorrel, SOTO, Stationkits, Stiletto, Surprise!, Switch, Symphony, Sync, TagWizard, Tava, TeamStudio, TeamTheater, Tenaro, Terrazzo, Theorem, Thread, Topaz, Touchdown, Tour, Tower Too, Trees, Trillium, Trolly, tX2, U-Free, Uno, V.I.A., Verb, Verge, Victor2, Visalia, Waldorf, Woodruff, Workspring, and X-tenz.
- ™ The following is a trademark of Microsoft Corporation, Redmond, WA: Windows.
- ™ The following is a trademark of Rodman Industries, Inc., Oconomowoc, WI: ResinCore1.
- [™] The following is a trademark of Ultrafabrics, LLC, Elmsford, NY: Ultraleather.
- ™ The following trademarks are under license from Wilkhahn Furniture products: Cana, Linus, Logon, Picto, Range, Stitz, Thema, Timetable, and Tubis.
- ™ The following is a trademark of MBDC, Charlottesville, VA: Cradle to Cradle and C2C.

- ™ The following trademarks are under license from Walter Knoll: Andoo, Bob, Lazlo, Lox, Ribbon, and Together.
- [™] The following trademarks are under license from PP Møbler: Bar and Flag Halyard.
- ™ The following trademarks are under license from Viccarbe: Davos, Holy Day, Last Minute, RS, and Wrapp.
- ™ The following trademarks are under license from Carl Hansen: Elbow, Paddle, Shell, Wing, and Wishbone.
- ^M The following trademarks are under license from Cambridge Sound Management, LLC, Cambridge, MA: QtPro Soundmasking, Qt Quiet Technology, and Sonet Qt.
- [™] The following is a trademark of Electri-Cable Assemblies, Shelton, CT: Interact.
 - Trademarks used here in are the property of Steelcase, Inc. or of their respective owners.