

Run in the MS Press newspaper on Wednesday, November 9, 2016 and again on Wednesday November 16, 2016 the following:

NOTICE TO BID

Sealed bids will be received until and opened by the Ocean Springs School District Board of Trustees and/or their designee on Monday, December 5, 2016 at 2:00 p.m. in the Ocean Springs School District Business Office, located at 2300 Government Street, P.O. Box 7002, Ocean Springs, Mississippi 39566, for the following:

Ocean Springs High School Band Uniforms

Specifications may be obtained in the School Business Office, 2300 Government Street, Ocean Springs, Mississippi, 39564 or by visiting www.ossdms.org.

All submissions must be sealed and marked **“SEALED BID-BAND UNIFORMS”**

The Board of Trustees reserves the right to reject any or all bid submissions and to waive any informality.

OCEAN SPRINGS SCHOOL DISTRICT

Sue White
President, Board of Trustees



Ocean Springs School District

ADMINISTRATIVE OFFICES
2300 Government Street P.O. Box 7002
Ocean Springs, Mississippi 39564
Office: (228) 875-8239 Fax: (228) 875-7703
Website: <http://www.ossdms.org>

INSTRUCTIONS TO VENDORS-PART A BID

For the purposes of clarity, the terms contractor, vendor and seller shall be synonymous. The terms Ocean Springs School District and owner shall be synonymous. The terms Bid and Proposal shall be synonymous.

- 1. Contract Documents:** The District's expectations with respect to the performance by each vendor and by each seller in connection with the District's purchase are set forth in the Instructions to Vendors. Vendors who fail to examine and comply with the bid documents do so at their own risk.
- 2. Preparation of Bid:** Any explanation desired by a vendor regarding the meaning or interpretation of any portion of these documents must be requested in writing and directed to the Business Office in sufficient time for a reply to reach vendor before the submission of their Bids. Oral explanations or instructions given before the opening of the bids will not be binding. Any information given to one prospective vendor will be furnished to all prospective vendors as a Bid Addendum, if such information is necessary to vendors in submitting their bids or if the lack of such information would be prejudicial to an uninformed vendor.
- 3. Information Required:** Each vendor shall furnish the information required by these documents. The vendor shall sign the bid, all addenda, and the Bid Sheet. The person signing the Bid must initial erasures or other changes. Bid signed by an agent must be accompanied by evidence of the agent's authority unless such evidence has been furnished previously to the District's Business Office. Bids must be firm. If the vendor believes it necessary to base his/her price on price adjustment, such bid may be considered, but only as an alternate. The District is not required to pay Federal Excise Taxes and Mississippi and local retail sales and use taxes. Tax exemption certificates will be provided upon request. Bids submitted on other than district forms or with different terms or provisions may be considered as non-responsive bids. The district expects that all bids will remain valid until thirty (30) days after the bid opening or until contracts are signed and operational, whichever ever comes first. If a vendor indicates in the Bid that he/she may withdraw the bid in less than thirty (30) days, this factor will be considered in awarding the contract. Each Vendor will certify that: no federal or state suspension or debarment is in place, no criminal history of the firm/vendor or its employees exists, there is no collusion involved in presenting the Bid or its components, and the minimum insurance requirements are in place. Vendor/Seller represents and warrants that it will ensure its compliance with the Mississippi Employment Protection Act (Senate Bill 2988 from the 2008 Regular Legislative Session) and will register and participate in the status verification system for all newly hired employees. The term "employee" as used herein means any person that is hired to perform work with the State of Mississippi. As used herein, "status verification system" means the Illegal Immigration Reform and Immigration Responsibility Act of 1996 that is operated by the United State Department of Homeland Security, also known as the E-Verify Program, or any other successor electronic verification system replacing the E-Verify Program. Vendor/Seller agrees to maintain records of such compliance and, upon request of the State, to provide a copy of each such verification to the State. Vendor/Seller further represents and warrants that any person assigned to perform services hereunder meets the employment eligibility requirements of all immigrations laws of the state of Mississippi. Vendor/Seller understands and agrees that any breach of these warranties may subject Vendor/Seller to the following: (a) termination of the Agreement and ineligibility for any state or public contract in Mississippi for up to three (3) years, with notice of such cancellation/termination being made public, or (b) the loss of any license, permit, certification or other document granted to Vendor/Seller by an agency, department or governmental entity for the right to do business in Mississippi for up to one (1) year, or (c) both. In the event of such termination/cancellation, Vendor/Seller would also be liable for any additional costs incurred by the State due to contract cancellation or loss of license or permit.
- 4. Submission Format of Bids:** Sealed bids should be returned in an envelope marked on the outside with the vendor's name and address and the BID name. Address to: Ocean Springs School District, Business Office, 2300 Government Street, Ocean Springs, MS 39564 in sufficient time to be received and stamped at the location specified on or before the opening date and time. Bids presented after the time and date, of the beginning of the opening process, will not be

accepted. All acceptable bids will be publicly opened and read in the Business Office of the Ocean Springs School District, 2300 Government Street, Ocean Springs, MS 39564, unless otherwise indicated on the announcement page of the bid. This solicitation does not commit the District to award a contract, pay any costs incurred in the preparation of the bid, or to procure or contract for the articles of goods or services.

5. **Modification or Withdrawal of BIDs:** Bids may be modified or withdrawn by written notice received by the District's Business Office prior to the exact hour and date specified for receipt of Bids. All modifications must be presented in a sealed envelope. A Bid may also be modified or withdrawn in person by a vendor or an authorized representative, provide his/her identity is made know and he/she signs a receipts for the modification or withdrawal, but only if the modification or withdrawal is made prior to the exact hour and date set for in the receipt of bids.
6. **Evaluation Factors:** "Most Advantageous Bid". The District will award contracts to the vendors/s who submit the "lowest and best value bid" to the District. **Evaluation of bids shall be based on what is the best overall solution for the Ocean Springs school District.**

After awarding of bids, the District reserves the right to negotiate the "lowest and best value bid", if in the District's sole discretion negotiation is appropriate under the circumstances and in the best interest of the District. It expressly reserves the right to request the "best and final" bid from the "lowest and best value bid" vendor's after the opening of the Bids. In all events, the District reserves the right to re-bid. The District expressly reserves the right to waive minor deviations from the specification when it is determined that total cost to the District of the deviating bid is lower than the lowest conforming bid which meets all aspects of the specifications, and the overall function of the goods or services, or both, specified in the deviating bid is equal to or greater than that of the conforming bid. In conjunction, the District also reserves the right to:

- Waive any defect, irregularity or informality in any bid procedures
- Reject any or all Bids
- Award the entire Bid to one vendor
- Award the Bid or portions to more than one vendor
- Award the Bid under the most beneficial terms for the District
- Extend the opening time and date
- Procure any item of the Bid by other means approved by State and the District's regulations



Ocean Springs School District

ADMINISTRATIVE OFFICES
2300 Government Street P.O. Box 7002
Ocean Springs, Mississippi 39564
Office: (228) 875-8239 Fax: (228) 875-7703
Website: <http://www.ossdms.org>

INSTRUCTIONS TO VENDORS-PART B **STANDARD TERMS OF AGREEMENT AND CONDITIONS OF BID**

For the purposes of clarity, the terms contractor, vendor and seller shall be synonymous. The terms Ocean Springs School District and owner shall be synonymous. The terms Bid and Proposal shall be synonymous.

- 1. Purchases:** Every purchase by the Ocean Springs school District of goods, services, or both, shall be governed by the following terms and conditions, except to the extent that such terms, and conditions are specifically modified or altered by the terms and conditions of the specifications sheets/s.
- 2. Gratuities:** The District may, by written notice to the Seller, cancel this contract without liability to Seller and District if it is determined by District that gratuities, in the form of entertainment, gifts, or otherwise, were offered or given by the Seller, or any agent, or representative of the Seller, to an officer or employee of the District with a view toward securing a BID or securing favorable treatment with determinations with respect to the performance of such BID. In the event this BID is canceled by District pursuant to this provision, District shall be entitled, in addition to any other rights and remedies, to recover or withhold the amount of the cost incurred by Seller. **Prohibition against Personal Interest in BIDs:** If any member of the Board of Trustees of the District or any employee of the District has any interest, either direct or indirect, in the business of the Seller, such interest must be disclosed in Seller's bid. At the discretion and interpretation of the District, such interest may disqualify the Seller/Vendor as meeting the requirements of this BID.
- 3. Special Tools and Test Equipment:** If the price stated in the Proposal includes the cost of any special tooling or special equipment fabricated or required by Seller for the purpose of fulfilling Seller's obligations, such special tooling equipment and any process sheets related thereto shall become the property of the District, to the extent feasible, and shall be identified by the Seller as such.
- 4. Warranty and Price:** The price to be paid by the District shall be contained in Seller's proposal which Seller warrants to be no higher than Seller's current prices on order for products/services of the kind and specification covered by this agreement for similar quantities under similar or like conditions and methods of purchase. The Seller warrants that no person or selling agency has been employed or retained to solicit or secure this BID upon an agreement or understanding for commission, percentage, brokerage, or contingent fee that would exceed the BID proposal pricing. For breach or violation of this warranty, the District shall have the right in addition to any other right or rights to cancel this BID without liability and to deduct from the BID price, or otherwise recover the full amount of such commission, percentage, brokerage or contingent fee.
- 5. Warranty Products:** Seller shall not limit or exclude any implied warranties. Any attempt to do so shall render this BID void at the option of the District. Seller warrants that the goods/services furnished will conform to the specification, drawings and descriptions contained in the BID Documents and to the sample/s furnished by Seller, if any.
- 6. Safety Warranty:** Seller warrants that the product or service sold/distributed in the District shall conform to the standards promulgated by the U. S. Department of Labor under the Occupational Safety and Health Act (OSHA) of 1970. In the event the product/service does not conform to OSHA standards, District may discontinue the use of products/services at the Sellers expense.
- 7. No Warranty by District against Infringements:** As part of this BID for sale, Seller agrees to ascertain whether goods manufactured or services provided in accordance with the specifications attached to the agreement will give rise to the rightful claim of any third person by way of infringement or the like. District makes no warranty that the production of goods/services according to the specification will not give rise to such a claim. In the event the Seller is sued on the grounds of infringement or the like will result, the Seller will notify District to the effect in writing, of the notification of infringement. If District does not receive notice and is subsequently held liable for the infringement or the like, Seller will indemnify the District and hold District harmless from any loss, cost or expense. If Seller ascertains that production of the goods/services in accordance with the specifications will result in infringement or the like, this BID shall be null and void. The Seller at the end of the warranty period shall deliver to the District any and all documents and operating manuals for technology, equipment, telecommunication access/passwords and training to maintain the equipment to continue to operate the systems.

8. Commitment of Current Revenue: The BID is conditioned on a best effort attempt by this governing body to obtain and appropriate funds for payment of the BID and the continuing right to terminate. This BID is a commitment of the District's current revenues only.

9. Advertising: Seller shall not advertise or publish, without District's prior consent, the fact that District has entered into this BID, except to the extent necessary to comply with proper requests for information from an authorized representative of the federal, state or local government.

10. Right to Assurance: Whenever one party to this BID in good faith has reason to question the other party's intent to perform, he may demand that the other party give written assurance of this intent to perform. In the event that a demand is made and no assurance is given within five (5) days of the request, the demanding party may treat this failure as an anticipatory repudiation of the BID.

11. Independent Contractor: Seller shall perform the services and/or provide goods required by the BID Document as an independent contractor and shall furnish such services/goods in its own manner and method. Under no circumstances or conditions shall any agent, servant, or employee of Seller be considered as an employee of the District.

12. Hold Harmless: Seller shall fully indemnify, save and hold harmless the District, its officers, employees, and agents (hereafter "the indemnities) against any and all liability, damage, loss, claims, demands and actions of any nature whatsoever on account of personal injuries (including, without limitation on the foregoing, worker's compensation and death claims), or property loss or damage of any kind whatsoever, which arise out of or in any manner connected with, or are claimed to arise out of or be in any manner connection with, the performance of the BID and its awarded products/services. Seller shall, at its own expense, investigate all such claims and demands, attend to their settlement or other disposition, defend all actions based thereon and pay all charges of attorneys and all other costs and expenses of any kind arising from any such liability, damage, loss, claims, demand and actions.

13. Assignment Delegation: No right or interest in this BID shall be assigned or delegation of any obligation made by Seller without the written approval of the District. No BID or its provisions may be assigned, sublet or transferred without the written consent of the District. The performance of this BID by Seller is of the essence of the BID and the District's right to withhold consent to such assignment or delegation by Seller shall wholly void and hold totally ineffective for all purposes unless made in conformity with this paragraph.

14. Waiver: No claim or right arising out of a breach of this BID can be discharged in whole or in part by a waiver or renunciation of the claim or right unless the waiver or renunciation is supported by consideration and is in writing signed by the aggrieved.

15. Modifications: The signed BID can be modified or rescinded only by a written request signed by both parties and their duly authorized agents.

16. Modification to Specifications: Any and all variances from the items specified must be submitted in writing to the Business Office in addition to detailed manufacturer's specifications ten (10) days prior to BID Opening.

17. Non-Resident Vendors: Non-resident vendors must include documentation of the non-resident vendor's state preference laws. This is the amount or percentage of preference states give to resident vendors from their own state when awarding BIDs. If the local state does not have a non-resident vendor's preference law, please attach a letter stating such. Such non-resident preferences shall be treated in a reciprocal manner.

18. Applicable Law: This BID shall be governed by the Mississippi Code as enacted by legislature which is effective and in force on the date of this BID together with any other laws of the United States, The State of Mississippi, Ordinances of the County of Jackson, Mississippi and the City of Ocean Springs, Mississippi and the policies and procedures of the Ocean Springs School District.

19. Interpretation Evidence: The BID Documents are intended by the parties as the final expression of their agreement and are intended also as a complete and exclusive statement of the terms of their agreement. No course of prior dealings between the parties and no usage of the trade shall be relevant to supplement or explain any term used in this agreement. Acceptance or acquiescence in a course of performance rendered under this agreement shall not be relevant to determine the meaning of this agreement even though the accepting or acquiescing party has knowledge of the performance and opportunity for objection. Whenever a term defined by codes, is used in this agreement, the definition contained in the code is to control.

20. E-Verify Program: Vendor/Seller represents and warrants that it will ensure its compliance with the Mississippi Employment Protection Act (Senate Bill 2988 from the 2008 Regular Legislative Session) and will register and participate in the status verification system for all newly hired employees. The term "employee" as used herein means any person that is hired to perform work with the State of Mississippi. As used herein, "status verification system" means the Illegal Immigration Reform and Immigration Responsibility Act of 1996 that is operated by the United States Department of Homeland Security, also known as the E-Verify Program, or any other successor electronic verification system replacing the E-Verify Program. Vendor/Seller agrees to maintain records of such compliance and, upon request of the State, to provide a copy of each such verification to the State. Vendor/Seller further represents and warrants that any person assigned to perform services hereunder meets the employment eligibility requirements of all immigration laws of the State of Mississippi. Vendor/Seller understands and agrees that any breach of these warranties may subject Vendor/Seller to the following: (a) termination of this Agreement and ineligibility for any state or public contract in Mississippi for up to three (3) years, with notice of such cancellation/termination being made public, or (b) the loss of any license, permit, certification or other document granted to Vendor/Seller by an agency, department or governmental entity for the right to do business in

Mississippi for up to one (1) year, or (c) both. In the event of such termination/cancellation, Vendor/Seller would also be liable for any additional costs incurred by the State due to contract cancellation or loss of license or permit.

21. Venue: Both parties agree that venue for any litigation arising from this BID shall lie in Jackson County, Mississippi.

22. Payments: No partial payments will be given for services/products until the job/order is complete.



Ocean Springs School District

ADMINISTRATIVE OFFICES

2300 Government Street P.O. Box 7002

Ocean Springs, Mississippi 39564

Office: (228) 875-8239 Fax: (228) 875-7703

Website: <http://www.ossdms.org>

BID PROPOSAL

Ocean Springs High Band Uniforms

Attention: Mary T. Gill
Chief Financial Officer

Having examined the Bid specifications on the items described on the attached pages, Bidder agrees that if bid is awarded by the Board of Trustees, the successful Bidder will accept an order at the prices bid, and these prices will remain in effect until the order is complete. Prices are on items as specified or of equal quality unless so indicated. It is understood that the successful Bidder may be required to remove items delivered to the school district at Bidders cost and refund the cost of said items that do not meet specifications. It is agreed that if chosen as the successful bidder invoices will not be submitted or payment requested until the order is complete.

Evidenced by the signature below:

No federal or state suspension or debarment is in place.
No criminal history of the firm/vendor or its employees exists.
There is no collusion involved in presenting the BID or its components.
The minimum insurance requirements are in place.

The Service Provider must provide qualifying legal registrations and licensures:

D-U-N-S Number _____

FEIN# _____

Completed W-9 must be included in the bid packet

Bid Proposal page 2

I, WE propose to furnish and deliver the items as listed per Bid form, according to your specifications and quantities, at the prices indicated.

Price Quote Good Through _____

Signature

Company

Name (Typed or Printed) & Title

Street or P. O. Box

Telephone & Fax Number

City, State and Zip Code

Email Address

Date

IMPORTANT: The Bid Proposal, Deviation Form, Non-Collusive Bidding Certification, "Fully Constructed" agreement, Bid Form, References, Styling Specifications and fabric certification must be returned in the bid envelope

BID FORM

Ocean Springs High School
Band Uniforms

We have reviewed the attached specifications and unless deviations are listed, will supply uniforms and accessories, as specified. Please attach warranty

Quantity	Item	Unit Price	Extended Price
300	Shakos		
300	Plumes		
300	Coats		
300	Jumpsuits		
300	Garment Bags		
300	Shako Boxes		
5	Plume Carrying Cases		
5	Plume Case Carts		
	Warranty		

TOTAL _____

Discount (if any) _____

F.O.B. Destination
Freight Included

Net After Discount _____

TERMS:

If awarded the contract, we agree to having previously submitted a sample uniform to ship the entire order within approximately _____ calendar days after approval of sample and receipt of necessary details and measurements.

Company: _____

Address: _____

Telephone: _____ **Email Address:** _____

Area Representative: _____

Address: _____

Telephone: _____ **Email Address:** _____

Signed / Title

Date: _____

Reference List

Please provide a list of all schools within the State of Mississippi that are presently wearing your company's uniforms. Include school name, address, contact person, telephone number and email address.

NON-COLLUSIVE BIDDING CERTIFICATION

By submission of this bid or proposal, the bidder certifies that:

- A. This bid or proposal has been independently arrived at without collusion with any other bidder or with any competitor;
- B. This bid or proposal has not be knowingly disclosed and will not be knowingly disclosed, prior to the opening of the bids, or proposals for this project, to any other bidder, competitor or potential competitor;
- C. No attempt has been or will be made to induce any other person, partnership or corporation to submit or not to submit a bid or proposal;
- D. The person signing this bid or proposal certifies that he has full informed himself regarding the accuracy of the statements contained in this certification, and under the penalties being applicable to the bidder as well as to the person signing in its behalf.

COMPANY SUBMITTING BID

AUTHORIZED SIGNATURE

TITLE

DEVIATION FORM

NOTE: The Buyer will not accept the general statement:

“ALL UNIFORMS WILL BE CONSTRUCTED USING OUR STANDARD MANUFACTURING PROCEDURES WHICH ARE EQUAL TO, IF NOT BETTER THAN THOSE CALLED FOR IN THE SPECIFICATIONS.”

Any, and all, deviations in construction MUST be documented below. Any bid submitted without the detailed deviation documentation will be rejected.

Does your uniform deviate from attached specifications?

YES _____

NO _____

If yes, indicate below any and all deviations from the specifications:

AUTHORIZED SIGNATURE

The uniform herein specified is considered

"FULLY CONSTRUCTED"

Unconstructed or lightly constructed uniforms that do not include a FULL coat lining (including the back, sleeves and front) AND complete inner construction (including two layers of hair canvas, one layer of mono-flex and a chest piece, and all other features listed in the construction and styling specifications) are NOT ACCEPTABLE and will result in disqualification as the specifications clearly require FULL CONSTRUCTION. The uniform specified herein must also be dry cleanable AND machine washable for customer flexibility.

By signing below, bidder acknowledges compliance with above specification requirements:

COMPANY SUBMITTING BID

AUTHORIZED SIGNATURE

TITLE

OCEAN SPRINGS HIGH SCHOOL BAND UNIFORMS

1) BID INVITATION AND GENERAL CONDITIONS

A. Sealed bid responses for furnishing the items and quantities listed in the attached specifications are hereby being requested from your company. You are asked to return the bid form page(s) with your response.

B. BIDS MUST BE RETURNED IN A SEALED ENVELOPE TO:

Ocean Springs School District
ATTN: Business Office/Amy Armata
2300 Government Street
Ocean Springs, MS 39564

Bid will open at 2:00 pm on Monday, December 5, 2016. The envelope containing the bid should be marked on the outside "SEALED BID – BAND UNIFORMS". All bids received after the hour and/or date established above will be returned to the sender unopened.

C. Questions regarding this solicitation need to be emailed to aarmata@ossdms.org. Please check the website for any addendums to this solicitation.

2) DEVIATIONS FROM SPECIFICATIONS

A. Any deviation from these specifications must be documented on the enclosed deviation form. It is the intent of the school for the uniform to be manufactured strictly adhering to these construction and design specifications and deviations are not expected. If deviations are not documented fully, the bidder may be disqualified.

B. It is the intention of the buyer to offer equal opportunity to all bidders. The use of company names when referring to styles or colors are for descriptive purposes only and are not intended to be restrictive. Materials and items referred to in these specifications are available to all firms.

3) BUYER'S RIGHTS

In accordance with Mississippi Purchase Law, the buyer will award the contract to the bidder offering the "lowest and best", and not necessarily to the firm bidding the lowest price. The reputation of the manufacturer and local Mississippi representative, over-all appearance, style and fit of the uniform, quality of trims and accessories, plus special features a particular manufacturer

may have that make the uniform more practical or serviceable will be major factors in awarding the contract. Right is reserved by the Buyer to accept or reject any or all proposals, and waive informalities.

4) SAMPLE REQUIREMENTS (EXACT)

A. All bidders must submit an exact sample uniform together with their proposals. This sample uniform must be in the same color as the uniform proposed; it should reflect the exact style, and must reflect the tailoring details as would be found in the uniform being proposed, and of the uniform which would be furnished if awarded the contract by the buyer. Where special construction features are specified, these must be furnished with the bid showing the manufacturer's version of the feature. All major items being proposed must have a sample presented for comparison. It is to be completely understood that it is the intent of the buyer to have all items examined carefully and compared. Samples will be examined internally seams and linings may be opened for inspection. Samples must adhere to construction and styling specifications.

5) AREA REPRESENTATIVE

Bidder must agree to provide an on-site factory-trained representative to handle all details of the order. Said representative will be responsible for designing, measuring and servicing the order throughout the initial purchase and on a continuing basis. Bidders must list name, address and telephone number of the representative in their response. It is understood that said representative will make an annual personal call on the district to inspect uniforms and to be available to consult with the band director as necessary.

6) CUSTOMER INSTRUCTION MANUAL

The successful bidder will supply a printed booklet, an electronic version, and a uniform management web based software system. This data will indicate wearer identification number, original wearer and key measurements of uniform, i.e. height, weight, hat, chest, waist and out-seam. The successful bidder will also supply recommended cleaning instructions for the uniforms and all accessory items; specifying precise details on care and cleaning that are to be utilized in future upkeep and maintenance of the items in this bid.

7) SHIPPING

Each uniform is to be thoroughly inspected before shipment. Imperfections shall be corrected before the uniforms are shipped. Uniforms are to be shipped complete with heavy duty plastic wishbone hangers in containers. Wood hangers are unacceptable. Each wardrobe container shall be marked on exterior

to indicate the wearer number of each uniform enclosed. The uniforms will be ready to wear without cleaning or pressing. In the case of damaged shipment, it shall be the responsibility of the receiver to make an appropriate written notice when signing the carrier documents. The receiver shall inventory the damage and advise the uniform manufacturer in detail. Accessories such as sashes, drops, etc., as well as trousers, will be bulk packed unless otherwise specified.

8) **FABRIC SPECIFICATIONS**

The outer fabrics should be of a moisture wicking polyester/synthetic, performance wear, providing enhanced air permeability that differentiates it from generic polyester fabrics. The term "moisture wicking" refers to a fabric that lifts moisture away from the wearer, which keeps the body cooler in warm weather and warmer in cold weather. It is ***stain resistant, tear resistant, odor resistant, quick drying, colorfast, and wrinkle resistant***. Standard polyester fabrics are not acceptable substitutes for moisture wicking fabrics.

Examine all specifications carefully. It is the intent of the buyer to audit each sample for strict compliance to the specifications. These specifications encompass methods and materials yielding only the highest quality garment, through specifying only the highest quality materials, components, accouterments and designate only time-proven tailoring of the highest standard. Make note that some methods and materials have been judged inferior and unacceptable and are so noted herein. These standards are so stated to insure a garment having a functional lifetime retention period of at least 8 to 10 years, with normal care and maintenance being exercised.

IMPORTANT: All bidders are to submit, along with their bids, a certificate stating that the fabrics used in the manufacture of the uniforms will be exact materials called for in the specifications and will be first quality. This certificate must be signed by an official of the company. Bidders not furnishing this certificate will be disqualified. **NO FABRIC DEVIATIONS ACCEPTABLE.**

JUMPSUIT SPECIFICATIONS – AQUABILITY

1. GENERAL

Jumpsuits are special marching band construction and design. They shall not employ fashion tailoring techniques, materials and patterns that will not withstand the rigorous end use of band uniforms. Fashion pocketing, waistband material and construction, lightweight snaps and hooks are not acceptable.

2. PATTERNS

- A. The patterns and style must be in keeping with the end use of marching, with maximum capability to be adjusted for fitting a variety of wearers from year to year.
- B. They must have ample room for movement and be nonrestrictive for marching, in the seat, thigh and ankle area. The dimensions of a jumpsuit for a 38 regular male shall not be less than 18” circumference at cuff and 23” at thigh.

3. FRONT CLOSURE

- A. The fly zipper is brass “Y.K.K.” with a double locking slide. There is a metal stop at the base of the fly zipper. The fly teeth will extend completely up to the top of the waistband.
- B. The outside fly consists of the outer shell fabric and an inner layer of shell fabric.
- C. The inside fly is constructed with the zipper tape sewn flush to the edge


4. CROTCH REINFORCEMENT

- A. There is a “four-way “ crotch reinforcement consisting of 80/20 poly cotton, 10% poly fill, 3.5 yard per pound, pre-cured finish fabric.
- B. There are four, two ply sections, one on each side of the intersection of the fly, seat seam and inseams.
- C. Crotch area is clean finished with no pieces extending from top of inseams.

5. POCKETS

- A. Pockets are made of the outer shell fabric, and are a lateral extension of the zipper fly facings on both sides of the front fly. There are two front pockets in each jumpsuit/bibber trouser.
- B. The pockets are 4” – 5” wide. The pocket depth is 7 ½” along the front fly edge, with a diagonal opening of 5 ½”. The lateral pocket depth is 4”.

Utility Jumpsuit/Bibber Inside View

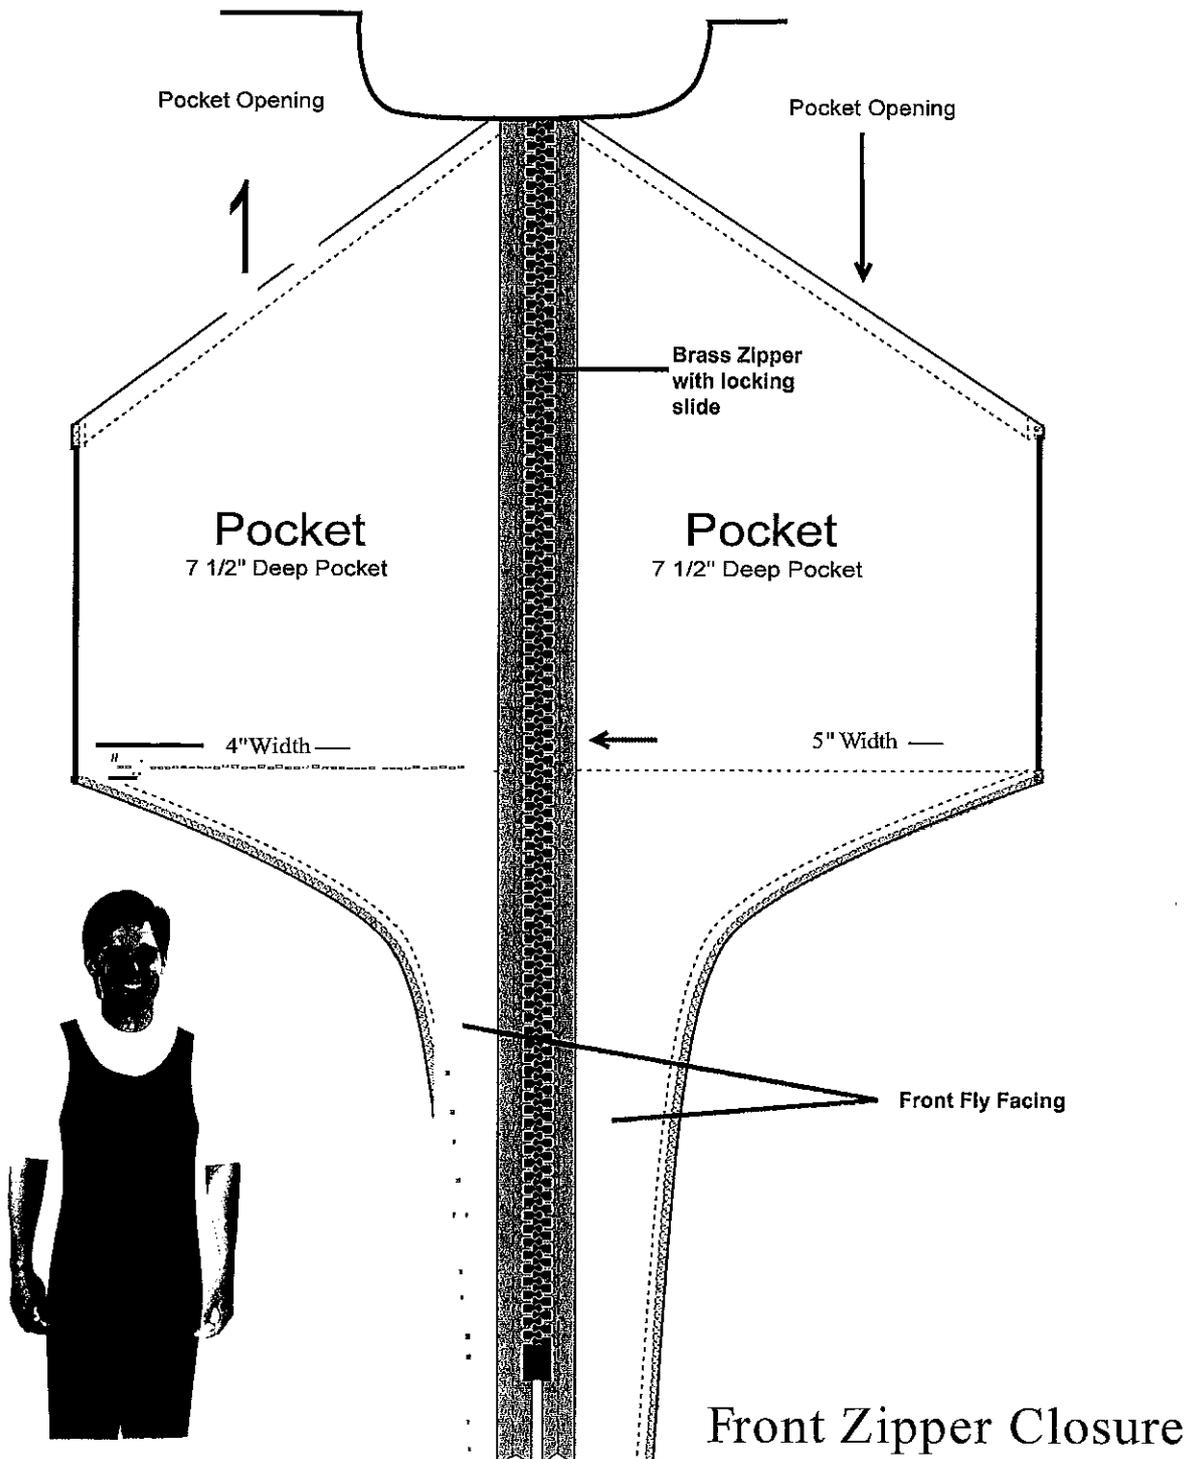

6. INSEAM

- A. The trouser is unhemmed, with the bottom edge finished all around in a serge stitch.
- B. The inseam will allow ample length for a cuff hem, and is constructed with a flat seam having a 1” outlet.

7. SEAMS

- A. The center back (seat) seam is finished using two rows of locked chain stitching for seam strength and durability. It is a flat seam with a 2” outlet.
- B. The out seam is secured with a safety double seam stitch.

8. PERMANENT SUSPENDERS

- A. Suspenders are made of whipcord fabric. Color shall match jumpsuits. Nylon webbing shall not be used because the adjusting slide will not remain in set position under tension from movement.
- B. Suspenders are two-ply, topstitched, and have interlining for body. This will insure the adjustable slide remaining in set position; suspenders will launder or dry clean as well as the jumpsuit.
- C. All hardware is unbreakable nylon as used in parachutes and life vests; unbreakable, unbendable and not subject to tarnishing or rusting. It will not cause undue abrasion on jumpsuit during dry clean tumbling.
- D. Suspenders are self-faced and interlined with pella. Lining of belting or pocketing is not acceptable.

9. PERIMETER SERGING

- A. All exposed “raw” edges are finished with a serging stitch of no less than 10 per inch, tight to edge, to prevent fraying.
- B. Serging thread is polyester.

COAT SPECIFICATIONS

1. GENERAL

Due to the unique requirements of a band coat (relative to the number of different wearers, minimum care received, wearing conditions and life expectancy), special patterns, materials, design and construction methods must be applied. These specifications speak directly to the requirements of construction, which allow for professional washing OR dry cleaning of the garment.

2. PATTERNS

- A. Coat patterns are special band uniform patterns with additional “ease” to allow for freedom of movement, wearing of clothing underneath and the convenient re-issue from year-to-year. Fashion or standard patterns do not allow enough room. Merely upgrading to oversized patterns will result in an unsightly and cumbersome fit.
- B. Computer generated patterns will provide proper fit for all male and female band members, with no restrictions or limitations as to chest size. Likewise, sizes will be assigned in needed “lengths” from XXS through XXXL. Coats will be patterned for EACH even numbered chest size (ex. 38, 40, 42, etc.), rather than just generic S, M, L, etc.
- C. Patterns are to be marked and graded using a computerized system to insure accuracy and updated patterns.

3. SIZING

- A. Measurements will be taken under the direction of a factory-trained representative.
- B. Sizes are analyzed by a sizing computer system assigning the closest standard proportion size to each wearer in order to permit re-issuing in subsequent years and to provide a reasonable fit for the initial wearer.
- C. Any stock sizes used must be approved in writing by the Band Director.

4. FABRIC

The shell fabric is to be of a moisture wicking polyester/synthetic, providing enhanced air permeability that differentiates it from generic polyester fabrics.

5. LINING

- A. Coat linings are cut from a separate set of patterns designed to fit each specific coat size and style. Linings are not cut from coat shell patterns then cut down to try and fit.
- B. Linings are “FIRST” quality “Aerocool” polyester/taffeta 97GR/Yd, woven to absorb and evaporate moisture rapidly by capillary effect. The absorption, diffusion and evaporation system of this lining is designed to maintain cool body temperature and excellent comfort for the wearer.

- C. In coat styles that do not utilize a back zipper, the coat lining has a vertical pleat running up the center back. This allows fullness, fit and comfort to the overall performance of the coat.
- D. In the armhole area, the coat lining is machine stitched to an ensemble including the outer coat fabric, shoulder pad and sleevehead. Hand sewing or felling does not provide the durability required for armhole construction.
- E. Linings are sewn to the coat bottom edge, and reinforced with pre-shrunk tailoring tape. Straight cut long coats will have an additional ½” lining pleat all around the coat bottom.

6. BRAID (see #25-B)


Only first quality washable braid shall be used for trim. Braid trim ¼” or wider, is sewn down with two rows of stitching on looped trims as well as straight line. In addition, looped trim is reinforced with a layer of non-woven fabric, permanently bonded to the inside coat fabric surface to inhibit puckering tendencies.

7. BUTTONS

High-quality, rust resistant metal buttons shall be used where specified and they shall be attached by sewing, ring and washer or toggle and washer or tack-back. The buttons shall not alter the washable capabilities of the garment.

8. BUTTONHOLES

All coat buttonholes are made with a CUT-FIRST automatic buttonhole machine. The hole is cut first, the edges covered with gimp, then completely sewn to “close” the buttonhole. The buttonhole back is secured and closed with bartack reinforcement.

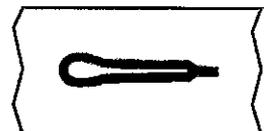

9. ZIPPERS


- A. The style is YKK, heavy duty of color matching VISLON. The zipper is auto-locking and has a “separating” feature for maintenance and durability.
- B. Zipper tapes are standard 9/16” width, sewn down with locked safety stitching and bar tacked at each end.

10. INTERLINING

A. The interlining has optimum four-layer construction. More than four layers create stiffness in the coat fronts, resulting in difficult and uncomfortable arm lift maneuvers in marching bands. Less than four layers results in flimsy construction and therefore a rumpled appearance and reduced durability. In keeping with individual patterns for coat shell fabrics and the linings, higher quality control and an elevated level of haircloth quality is obtained by these multi-layered interlinings being patterned, cut and assembled “IN HOUSE” at the uniform manufacturer’s facility. This basic construction practice enhances the fit and

comfort of the individual uniform (as opposed to “making do” by purchasing these multilayered ensembles and cutting them down to fit the “hundreds” of patterns required for each coat style and chest size).

Coat Front Interlining

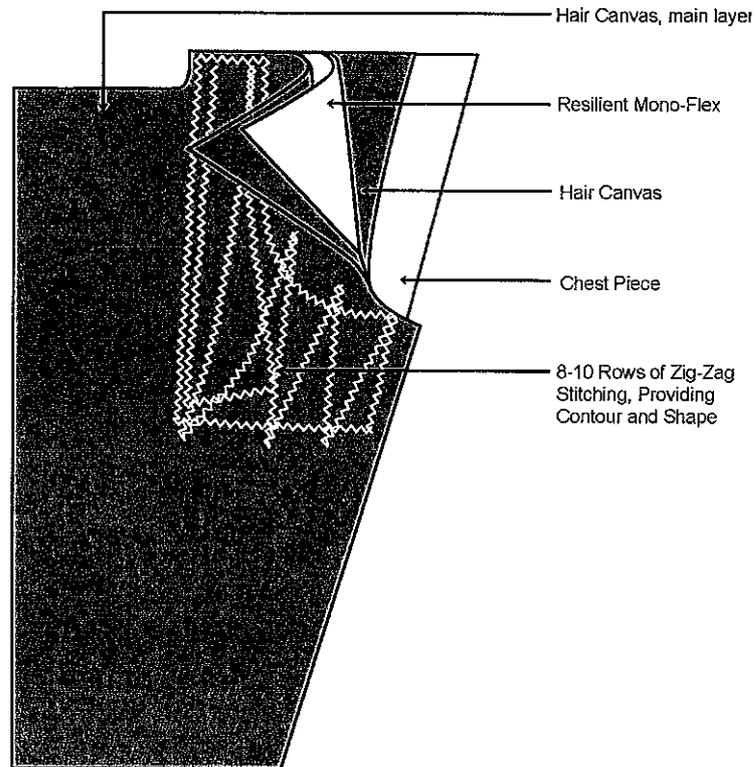

Coat Diagram 1

- B. The main layer of the interlining is a Hymo haircloth. This “hair canvas” is a blend of polyester, viscose rayon and genuine natural hair, which gives it soft resilience. This canvas is 100% washable with no shrinkage or loss of rigidity. The layer extends the complete length of the coat front, from shoulder seam down to the coat bottom.
- C. The second layer is a resilient 27.6% rayon/72.4% polyester canvas “MONO-FLEX” chest piece 4.2 oz in weight. Its dimensions are 6” wide x 6 ¾” long and extends downward from the upper chest area.
- D. The third layer is another piece of hair canvas (as per “B” above) 8” wide and 12” long, extending downward from the upper chest area, and completely covering the MONO-FLEX.
- E. The fourth layer is a ¼” thick padding of 3.6 ounce 100% polyester non-woven material that is soakable and non-shrinkable. This white chestpiece pad extends

approximately 6" below the armhole.

NOTE: In white coats and other light color fabric shades, a piece of thin Poly-sil white curtain is added to prevent "shadowing" of the haircloth interlining through the outer coat fabric.

- F. This entire multilayered interliner shall be sewn together with a series of eight to ten rows (depending on chest size) of zig zag stitching spaced approximately 1" apart. This is the optimum number of rows as recommended by the garment industry standards. Too many rows will reduce the flexibility, comfort and fit. Too few rows will limit durability and lifetime.
- G. The interliner is then secured to the coat shell fabric and coat lining, in the neckhole, armhole, bottom front and along the coat closure edge. A tailoring tape of 100% PIMA cotton, triple cold water shrunk, is included in these seams for added durability. The interlining is NOT sewn into the shoulder seam, nor the side of the coat. This allows flexibility and "give" to the entire coat front construction.


NOTE: The above construction is a time proven procedure. Under no circumstances are the haircloth and sewing operations to be substituted with a fusing or gluing operation.

11. ARMHOLES

- A. Armholes shall be oval shaped and allow sleeve to be pitched forward 3-4 degrees to maximize comfort and ease of movement with minimum distortion to the coat.
- B. The armhole shall be reinforced with ¼" pre-shrunk cotton tape all around to prevent stretching in the armhole.
- C. The entire armhole shall employ machine lock stitching. Hand or machine "felling" will not be accepted.
- D. The underarm portion of the armhole will have a bi-swing gusset allowance that allows freedom of movement.


12. SHOULDER PADS

- A. Shoulder pads shall be high quality foam, covered all around with a lightweight polyester lining, serge stitched around the curvature of the pad and are washable or dry cleanable.
- B. Shoulder pad size shall be minimum of 5" x 9" on regular width coat styles.

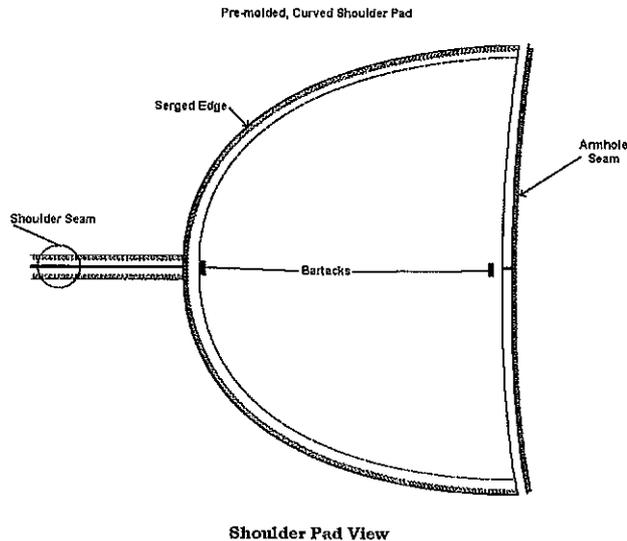

13. SLEEVE HEADS

The sleevehead provides fullness and shape to the top of the sleeve as it is sewn to the coat body. It consists of a separate strip of material used for the white chest piece pad in the interlining (10E). The sleeve head has a length of 14" and is equally positioned over the shoulder, to the front and back of the upper sleeve seam. The finished width is 2 1/4" at lower front, and tapers to a 1 3/4" width at lower back. The construction consists of a 3/4" turnback on the armhole edge, and has a seam spaced 1/2" from the edge. Sewn into the lower front portion of the white pad strip, is a 2 1/2" x 4 1/2" piece of "hairecloth" as described in the Interlining section (10B). The result of this "IN HOUSE" manufactured sleeve head is a substantially improved "body" in the entire sleeve/shoulder area, particularly when lettering or other embroidery trim is specified.

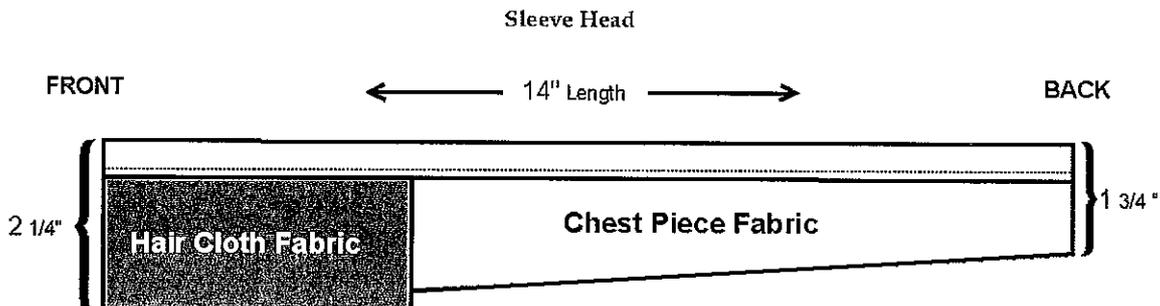

14. SLEEVE STITCHING


- A. Sleeves shall be set with machine lock stitch to insure proper distribution of fullness and durability.
- B. Fullness shall be sheered in by top-feed sewing machines.

15. ARMHOLE LINING FINISH

- A. The bottom of the sleeve armhole shall be lock-stitched through two layers of lining, two layers of fabric and armshield.
- B. The top shall be sewn through the coat lining, sleeve fabric, sleeve head, shoulder pad and shoulder strap with lock stitching.
- C. The entire armhole has tailoring tape all around.
- D. "Felling" by hand or machine is not acceptable when closing the armhole.

16. TAPING

- A. All seams in high stress areas are reinforced with tailoring tape to prevent stretching, and add durability to the seam. These tapes are pre-shrunk.
- B. Areas of this taping procedure include the following:
 1. All around the neck opening where collar joins the coat.
 2. Coat closure edges and completely around the bottom.
 3. Complete circumference of the armhole.
 4. Shoulder seams from collar (neck opening) to sleeve seam - except canopy coats.

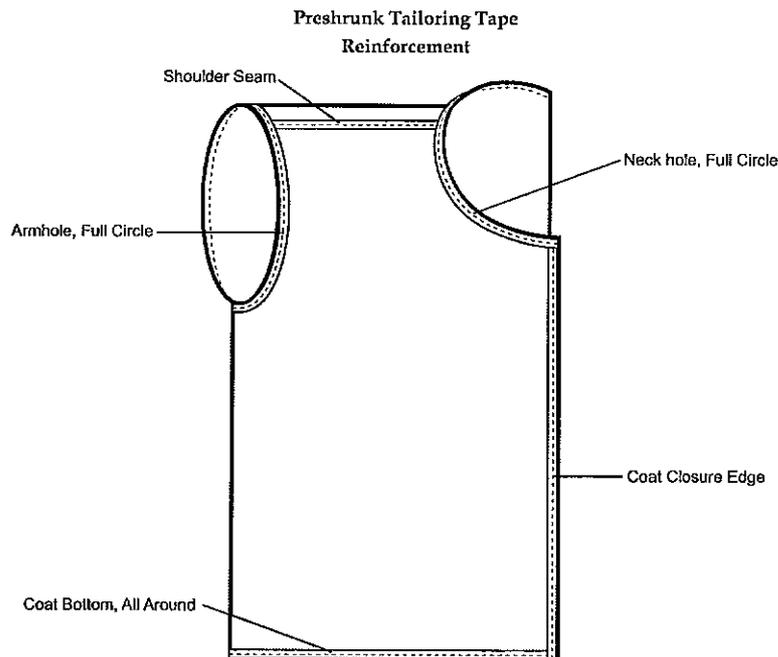

17. POCKETS

- A. All inside pockets shall be constructed with a pocket welter and shall be reinforced with a non-woven fabric.
- B. Pocketing material shall be 80/20 poly cotton, 100% poly fill, pre-cured finish, 3.05 YPP, 78/54 twill weave.
- C. Upper and lower welts of the inside breast pocket are to be 100% polyester material and pella backed.
- D. Pocket bag shall be constructed on one piece of pocketing with no open seams at the bottom.
- E. There shall be a tack at each end of pocket opening through all layers of pocketing. Tacks shall be concealed.
- F. Pockets made of lining or lightweight material shall not be acceptable.

18. SLEEVES

- A. Sleeves cuffs will have an approximate 4" turn up, which incorporates both the coat sleeve fabric and lining. This turn back includes a 3/8" binding at lower cuff edge.
- B. The forward and trailing sleeve seams in the 50/50 sleeve pattern are equipped with a series of gripper snap rings and post hardware. Two posts, spaced 1" apart, are applied to the lower sleeve cuff edge, at both seams in each sleeve. Six ring style fasteners are positioned starting 2 1/2" up from the cuff edge and are spaced 1" apart. Coats are shipped fully steam pressed, but without a crease at sleeve cuff bottoms.
- C. Sleeve cuffs with extensive cuff trim (appliques, inserts, looped braid designs, embroidery) are reinforced with non-woven material, bonded permanently to the inside of the coat fabric extending up toward the elbow area. This addition prevents puckering tendencies created by use of fabrics, braids, etc. which each have a different coefficient of stretching.
- D. Shoulder lettering and embroidered logo trim have a reinforced backing layer on the inside of the sleeve.

19. ARMSHIELDS


- A. The armshield is engineered to minimize the long-term effects of perspiration over the lifetime of the garment. Perspiration consists of moisture, salts, weak organic acids and body oils. Moisture wicking fabric having WICKING properties is specified for use as the armshield. ("Felt-like" fabrics that retain perspiration are not in the best interest of the garment). In addition to the wicking property, this moisture wicking shield has soil release, high permeability for airflow, and exhibits rapid evaporation.

- B. The armshield is approximately 4" x 4" in dimension, bound with double folded bias rayon on both sides and the bottom, then machine sewn into the armhole.
- C. Tensile strength and resistance to abrasion are additional advantages of moisture wicking armshields as compared to a "felt-like" material. The minimum abrasion quality is 10,000 on the STROLL FLAT test.



20. SHOULDER STRAPS

- A. Both the upper and lower layers of the shoulder strap are interlined with permanently bonded, non-woven material. This four layer ensemble is secured with an inside hidden stitch then top-stitched all around the edge, set in approximately 1/4". These layers are die-cut to insure exact conformity in shape and size, throughout the lifetime of the garment.
- B. Buttonholes are the CUT-FIRST style, having all raw edges reinforced with gimp, then solid stitching as described earlier in the Buttonhole section (item 8).

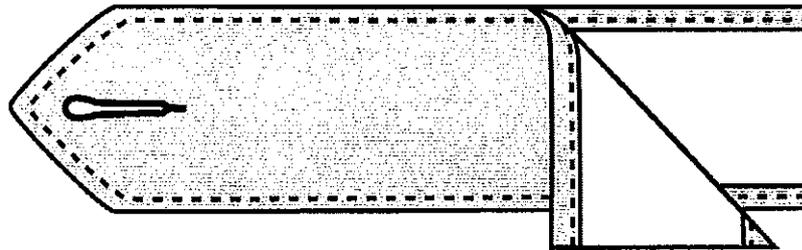


21. STANDING COMFORT COLLAR

- A. The collar is one of the highest stress areas in the coat. The collar is cut from a curved pattern. This allows a front "drop" to fit the downward front slope of the natural human body configuration. This item is NOT to be cut in a straight pattern.
- B. There are a total of eight layers in this comfort collar construction.

1. The collar lining of moisture wicking fabric, as described in the fabric section (item 4), has a non-woven material, permanently sewn and bonded to the inside.
2. Sewn directly to the inboard surface of this tandem collar lining construction, centered on the lining and running the circumference of the collar are two layers of 3/8" horse hair braid reinforcement.
3. The outer collar shell, also made of moisture wicking, has a non-woven material permanently sewn and bonded to the inside.
4. Both the collar lining construction and the outer collar shell construction are sewn to two base layers of heavy duty Pellon forming the finished comfort collar.


NOTE: The entire sewing operation in the construction of the collar is "machine-sewn". Hand sewing simply cannot insure the required durability.

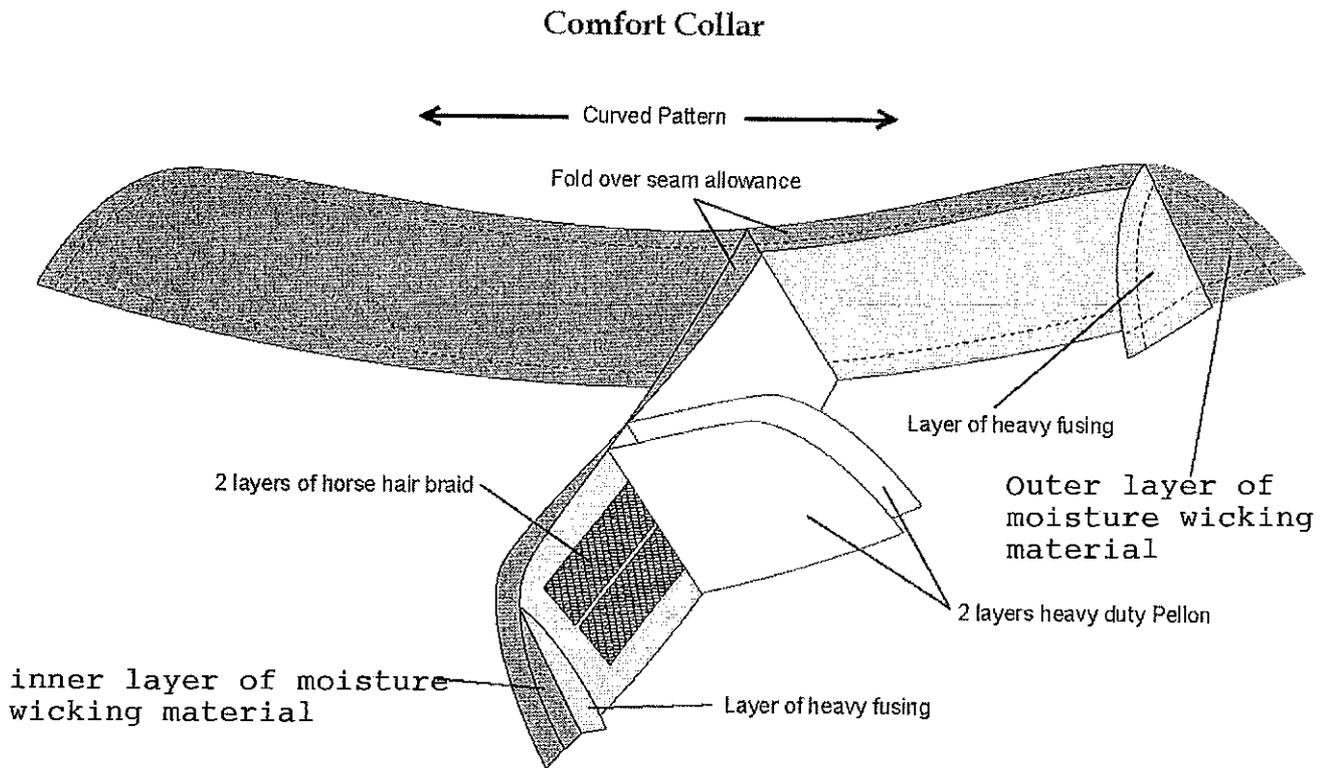

22. "WRAP" COAT COLLAR


The standing collar on the wrap style coat is "soft", in that there is no inner layer of stiff mylar. This collar generally measures 1 3/4" finished width. The inside lining is moisture wicking fabric having a permanently bonded layer of non-woven fabric to reinforce the collar. The outer layer

of the collar is also moisture wicking fabric having a reinforcing layer of monoflex (resilient canvas of 27.6% rayon/72.4% polyester – 4.2 oz. weight) stitched in. This results in a reinforced “soft” collar having four layers. All exposed edges are turned inward with an invisible row of stitching. A visible row of topstitching is added all around the edge. There are no exposed, rough edges.

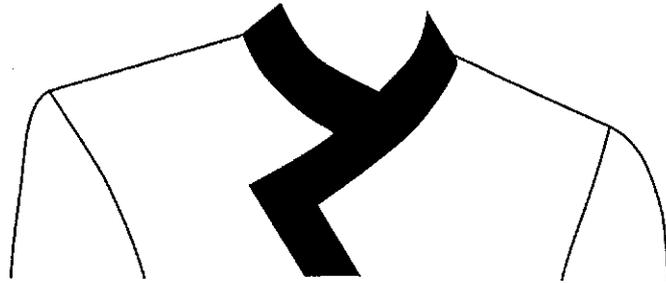

23. COAT TRIM

- A. All trim must be sewn to the outer coat fabric before the lining and interlining are joined to the coat. Trim sewn through the interlining and lining is not acceptable.
- B. Washable braid trim of ¼” or wider is sewn down with two rows of stitching. This includes looped trims as well as straight line. In addition, looped trim is reinforced with a layer of non-woven fabric, permanently bonded to the inside coat fabric surface, to inhibit puckering tendencies.

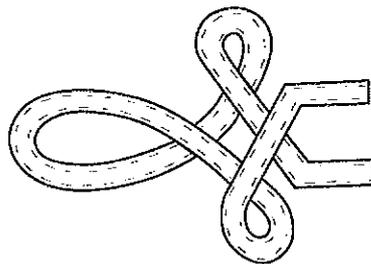

24. SPECIAL COAT STYLES

- A. Seamless canopy coat styles will require a “Memory Recovery” system across the upper back and shoulders due to the under construction across each shoulder.
- B. The Memory Recovery system is a 2 ½” wide panel of heavy duty light weight elastic, made of 90% (70 denier) nylon and 10% (140 denier) Spandex. It is sewn into each sleeve seam in the coat back area, and extends fully across the coat back. When the wearer of this coat style is in an arms down position, the system is relaxed. During an arm lift maneuver the entire coat back experiences stress and pulling across the shoulders. The Memory Recovery system brings the various fabrics, folds and coat parts, back to the original “EASE” position when arms return downward. This entire process prevents unsightly bulging. The durable elastic panel is included in the manufacturer’s warranty.

25. SEAMS

The center back seam and side body seams shall be 5/8". Seams are to be plain with a minimum of 1 1/4" - 1 1/2" total outlet in the side body seams and 3/4" in the back seams. Coat is to be completely machine stitched except in areas where tailoring or appearance necessitates other methods. The ends of all seams and stitching shall be back-stitched not less than 1/4". Thread breaks of all stitch types must be secured by stitching back from break 1/2" to 1". Coat is to be tailored with a four-piece back, comprised of a center back seam and two additional back body seams curving from sleeve seam downward and running out the coat bottom.

26. THREAD

Threads used throughout the garment will be TEX 40 size, 29/2 gauge and 4.56 lb. tensile strength. All threads used are to be heat resistant, vat dyed, sunfast, dry cleanable pre-shrunk and moisture proof. In areas of multiple color trim panels, a monofilament thread may be indicated. This thread is a 330 denier and has a .008 diameter rating. The manufacturer's warranty includes all threads used throughout the uniform construction.

SHAKO CONSTRUCTION SPECIFICATIONS

1. GENERAL

It is important that the shakos be made by the manufacturer of the uniforms. This will insure that all the manufacturer's quality control practices will be followed. The practices include (but are not limited to), workmanship consistent with uniform, fabric matching, and timely delivery.


2. BODY

- A. Shako body is vacuum-formed high impact styrene .135" gauge white plastic and has high rubber content to prevent cracking. Body is pliable and flexible to conform to wearer's head, in an "oval" shape, rather than circular or round.
- B. There is a separate shell size for each head size.
- C. Each hat has a clear ident-a-peek pocket in the inside top with the size imprinted in ¼" letters for ease of issue. Each ident-a-peek contains a card to identify the wearer. A size sticker is also applied to the inside top.

3. COVERING

- A. The fabric side covering is pulled down to the bottom edge of the shako body, then turned back 1 ½" up inside the shell. Two rows of stitching secures the side covering to the molded shell. One row is polycore poly wrap thread, lock stitched. The second row is Telex 135 poly tex thread, also lock stitched. This sewing operation extends all around the entire bottom edge of the molded shako body.
- B. The two rows of stitching described in section A above, secure a total of six layers for maximum durability. These layers, from the outside to inside, are: BOTTOM SIDE BAND, VINYL HEADLINER, SIDE COVERING, MOLDED SHAKO BODY, SIDE COVERING TURNBACK and VINYL HEADLINER TURNBACK.


Shako Cross Section

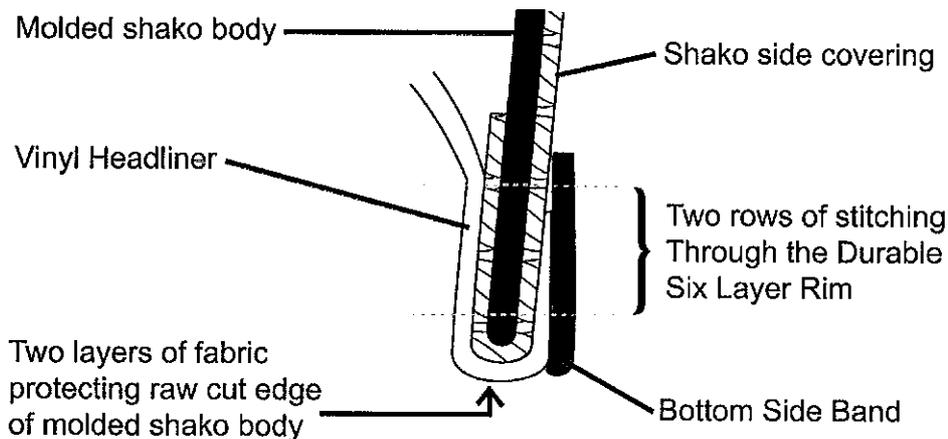

4. HEADLINER AND SPECIAL FEATURES


- A. Headliner shall be cotton backed expanded vinyl with embossed finish. There are six scallops with metal eyelets to receive drawstring for adjustability. Drawstring to have plastic lock.
- B. Headliner is turned and sewn with a lockstitch in such a manner to allow for adjustability.
- C. Headliner extends around the bottom edge of the plastic body, and stitched through. This results in two layers of material (outer fabric and vinyl headliner) to secure and protect the bottom edge of the shako shell body.
- D. There is a metal eyelet on each side of the hat body where the button prong passes through plastic.
- E. High density polyethylene plume sockets are included and riveted to the body.
- F. A metal spacer is used to affix the front chain to each side button.

Shako Construction

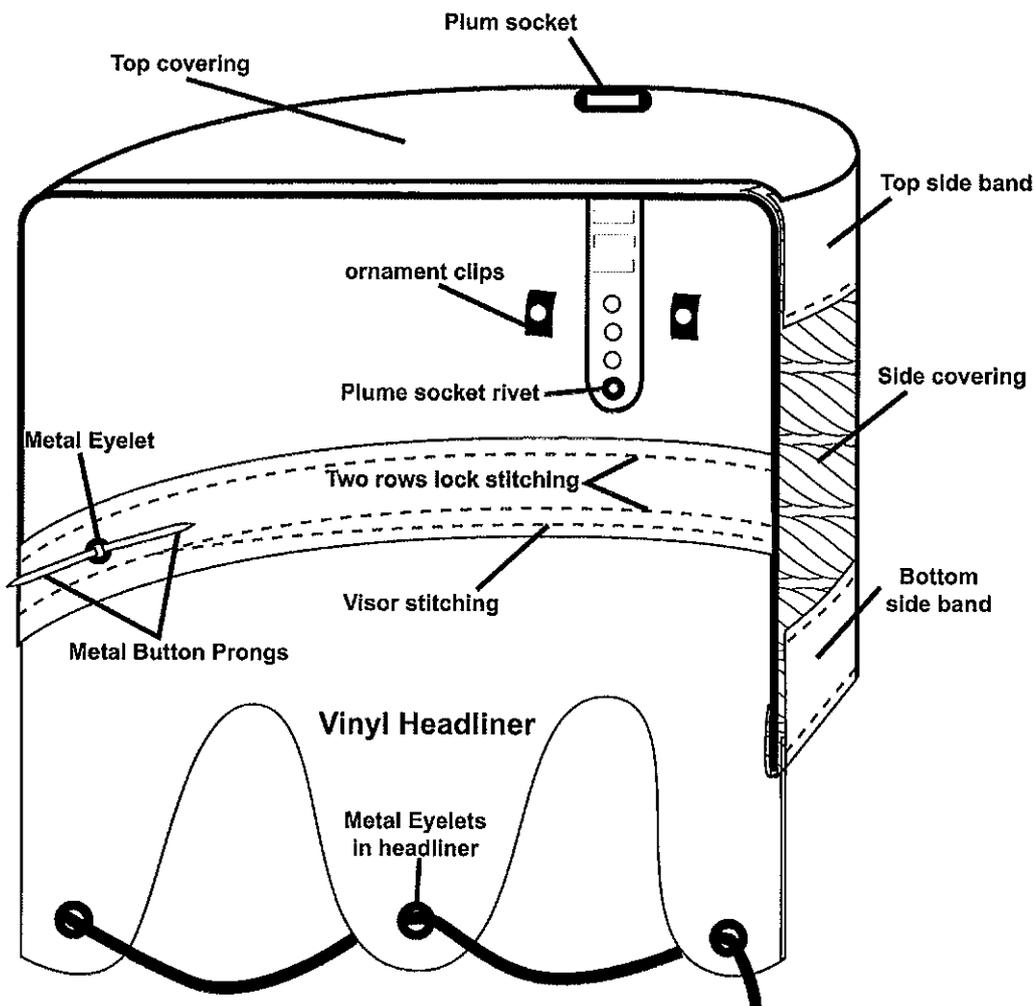


5. VISOR

- A. Visor is non-breakable one-piece plastic, not laminated. It is secured to the shako body with lock-stitch safety sewing.
- B. Visor color is molded through entire body of visor. The material is an engineering grade copolymer with low-temperature toughness, stain proof, fade and discoloration proof, impervious to ultraviolet light (sunlight).

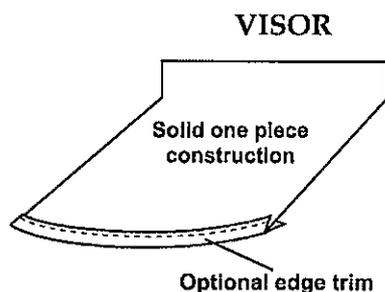

6. CHINSTRAP

- A. Chinstrap is $\frac{3}{4}$ " pliable plastic with metal buckle and roller, and has a $\frac{1}{2}$ " keeper.
- B. There are metal eyelets at chinstrap ends where button attaches (to prevent strap from being torn by button shank).
- C. There is a $\frac{3}{4}$ " nickel-plated brass chinstrap hook at the rear of the shako, attached with a metal clip.

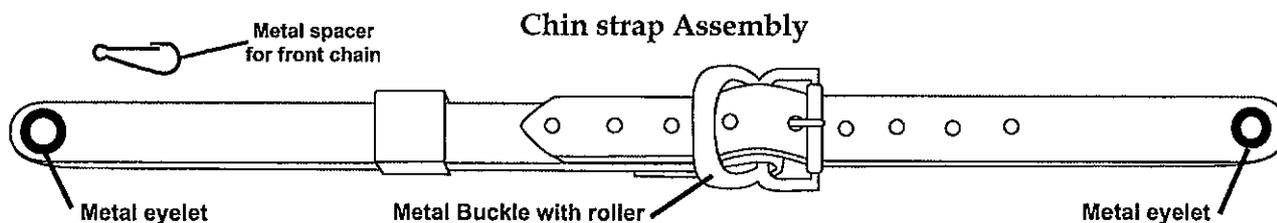

7. BUTTONS

- A. Side buttons are three-piece metal.
- B. Buttons consist of prongs, base plate, and face plate. Side buttons are metal with spread prongs. Plastic buttons are not acceptable.

SHAKO, HELMET AND BAND ACCESSORY CARRY CASE SPECIFICATIONS


Headwear carry case is "Shako-Mate" or equivalent.

MATERIAL: High Impact Polystyrene. This material is heat resistant, which prevents melting, and cold resistant, which resists breakage due to the material becoming brittle.

SIZE: 12" by 12" to accommodate headgear and plume as well as various accessory items. Smaller boxes that prevent plume and accessories from being stored are not acceptable.

HANDLE: The handle is rounded with the latch placed behind the handle. Boxes with the handle on top, preventing ease in removal from stacked position, are unacceptable.

- A) Carry case has a pebble grain finish to compliment appearance and prevent scratching.
- B) Inside of box has reinforcement flanges to allow for stability, and aid in stacking when containers are stacked in open position.
- C) Carry case is stackable to allow for storage. Stacking nodes are to be on underside of container with receiving units on top.

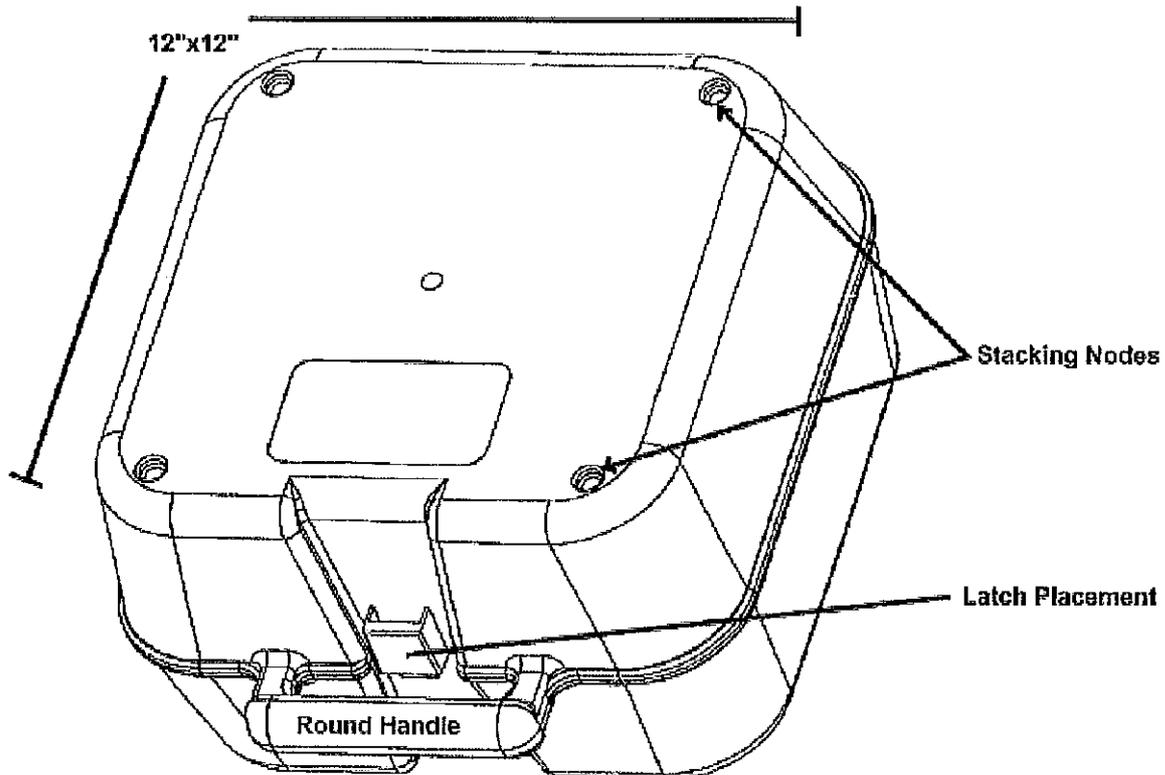

STYLING SPECIFICATIONS

BANDSMAN COAT:

**FOR: Ocean Springs High School
Ocean Springs, MS**

FABRIC: XD Sapphire Blue
XD Divine White

100% Synthetic Moisture Wicking Fabric
100% Synthetic Moisture Wicking Fabric

STYLE: Fully constructed - Waist length canopy coat with an offset front point. Front and back to have a horizontal split from armhole to armhole that will line up with the bottom of the shoulder caps. Back cut straight.

CLOSURE: Back butted with Blue nylon zipper that zips down, starting in collar.

SPECIAL DETAILS: Construction that allows the coat to be fully machine-washable. The coat has performance-wear "Aerocool" lining for maximum breathability and comfort for the wearer. "Aerocool" lining is woven to absorb and evaporate moisture rapidly by capillary effect. The absorption, diffusion and evaporation system of this lining is designed to maintain cool body temperature and excellent comfort for the wearer. The coat also utilizes performance-wear inner full front canvas that is fully machine-washable. Also, perspiration shields, sleeve-heads, inner bias taping system and other necessary features are included in the Coat construction portion of these specifications.

The coat has snap tape at the cuffs to allow for adjustable hems without the necessity of sewing. Sleeves have a special pattern that allows freedom of movement for the wearer. The coat also has extended shoulders to allow more comfort for the wearer. There are special pre-molded (3/4" thick) firm foam shoulder pads with nylon tricot covering measuring 5" wide x 9" long at each shoulder. Overlap comfort collar with square extension. Each coat has an identification number, as well as a barcode. Shoulder caps of XD Divine White with Duraflex innerlining. Set flush to outside of each cap is a 1/4" stripe of XD Sapphire Blue with a 1/4" stripe of Silver Glamourous butted to the blue and a 1/4" stripe of XD Raven Black butted to Silver. Bottom of shoulder caps to line up with the split in the coat front and back.

FRONT TRIM: 4" wide sublimated applique from left shoulder to the left coat bottom. Right edge of applique will start at the offset point. Sublimated fabric to be XD Sapphire Blue at top and XD Raven Black at bottom with the split to line up with the split on the coat front. Applique to have silver metallic looking interlocking chevrons from top to bottom. Slightly covering each side of the applique is a 1/4" stripe of Silver Metallic Glamourous. Right chest to have a 3" tall school logo of "OS" of Silver Metallic direct swiss with Black outline.

BACK TRIM: Upper: XD Divine White. Lower: XD Sapphire Blue. Horizontal split from armhole to armhole that will line up with the bottom of the shoulder caps. No trim.

_____ Deviation

_____ No Deviation

COMFORT COLLAR: Overlap comfort collar. Outer portion of collar to be XD Divine White on right front and left front and entire back to be XD Sapphire Blue. Lined with XD Sapphire Blue. The collar lining of moisture wicking fabric has a non-woven material, permanently sewn and bonded to the inside. Sewn directly to the inboard surface of this tandem collar lining construction, centered on the lining and running the circumference of the collar are two layers of 3/8" horse hair braid reinforcement. The outer collar shell, also made of moisture wicking fabric, has a non-woven material permanently sewn and bonded to the inside. Both the collar lining construction and the outer collar shell construction are sewn to two base layers of heavy duty Pellon forming the finished comfort collar. The collar has eight layers of construction. Collar will overlap right over left with a square extension. Set on overlap is one 30L Chrome lined livery button attached with disc and ring.

SHOULDER STRAPS: XD Divine White with 30L Chrome lined livery long shank attached with disc and ring. No trim.

UPPER SLEEVE TRIM: Top sleeve to be XD Divine White. Under sleeve to be XD Sapphire Blue. No trim.

CUFF: No trim.

STYLING SPECIFICATIONS

BANDSMEN UTILITY JUMPSUIT:

**FOR: Ocean Springs High School
Ocean Springs, MS**

FABRIC: XD Raven Black 100% Synthetic Moisture Wicking Fabric

<u>OPTIONS:</u>	Fully Lined	_____	One-Half (1/2) Lined	_____
	Adjustable Zipper	_____	Hemmed	_____
	Side Pockets	_____	Fob Wallet	_____
	Flair Legs	_____	Heel Guards	_____
	Suspender Buttons	_____	French Fly	_____
	Front Zipper	<u>XXXX</u>	Back Zipper	_____

STRIPE: None.

POCKETS: Right welted outside.

SPECIAL FEATURES AND DETAILS: Each jumpsuit has an identification number, as well as a barcode.

Fully constructed zipper, lined fly and taped seams.

Two snaps at top.

1 1/4" shoulder straps of jumpsuit fabric with nylon slides.

Four-way reinforced crotch. Three inch (3") let-out center back. Two inch let out at each side seam.

There is also a piece of heavy duty black elastic in back of suspenders to allow more comfort for the wearer.

Special hem adjustment using snap tape.

Special - Perma-crease

Left Chest: 2" tall special school "OS" logo of Royal Blue direct swiss with silver metallic direct swiss outline. Set below in script font, "Blue Grey Pride". "Blue" and "Pride" to be Royal Blue and "Grey" to be silver metallic direct swiss.

_____ Deviation

_____ No Deviation

STYLING SPECIFICATIONS

HEADGEAR:

**FOR: Ocean Springs High School
Ocean Springs, MS**

STYLE: C-51

PLUMEHOLDER: Center front attached with metal screw-post and nut.

VISOR: White

TOP MATERIAL: White Grained Vinyl

SIDE MATERIAL: Split at side buttons. Front to be White Grained Vinyl and back to be XD Sapphire Blue.

BANDS: Bottom Only: XD Sapphire Blue

ORNAMENT: 3" wide stripe of sublimated fabric set approx. 1" to the left of center. Sub fabric to match XD Sapphire Blue with three diagonal silver metallic looking stripes. Set on each side of insert is a ¼" stripe of Silver Glamourous.

CHINSTRAP: White with nickel buckle

FRONT STRAP: ¾" stripe of Silver Glamourous with a ½" stripe of White stan twill centered on top.

SIDE BUTTONS: 45L Nickel Grained Lined

SPECIAL TRIM DETAILS: Metal hook in back of shako for chinstrap. Identification numbers. Adjustable inside cord to have plastic cord lock.

_____ Deviation

_____ No Deviation

STYLING SPECIFICATIONS

**FOR: Ocean Springs High School
Ocean Springs, MS**

ACCESSORIES and Warranty:

PLUME: 16 in French Upright White with silver mylar.

SHAKO BOX: Heavy duty Black plastic.

GARMENT BAG: Royal Blue 200 Denier Nylon. Clear I.D. Window.
Accessory pocket in back. Heavy duty zipper
front and back. All seams will be double stitched.
Each bag to be screen printed with school logo.

PLUME CARRIERS :

63 Piece Plume Case. Holds 63 plumes up to
16 inches tall, including the wire.

PLUME CASE CARTS: Plume case carts for transporting plume Cases

WARRANTY: The Ocean Springs School District has set standards to insure a garment having a functional lifetime retention period of at least 8-10 years, with normal care and maintenance. If your company offers a warranty of any period please attach and include the information to the bid proposal. Also include the cost of any warranty on the bid form.

_____ Deviation

_____ No Deviation