

Product Information


Description

This electrical distributor mounts flush in a surface and has a one-touch pop-up mechanism for accessing power and data. It can be configured with 2 simplex receptacles, or 1 simplex receptacle and 1 data opening. The distributor is available with a power cord with plug end, or electrical conduit for hardwire connection. A voice/data adapter kit is included, allowing the data openings to accept various manufacturers' couplers and jacks. Attachment hardware and cord/cable clips are also included. Product is UL listed.

Notes

Field cutting of surface may be required. Information on surface cutout size is included on instruction sheet.
 Distributor with PVC-free wiring option (LZ) is Cradle to Cradle Silver Certified.
 Distributor with silver finish option (OI) or white finish option (OJ) and standard wiring (4Z) has painted metal trim with white plastic simplex/data interior. Distributor with black finish option (OH) and standard wiring (4Z) has black painted trim with black plastic simplex/data interior. Distributor with PVC-free wiring option (LZ) has black plastic simplex/data interior, regardless of the finish color.

Dimensions

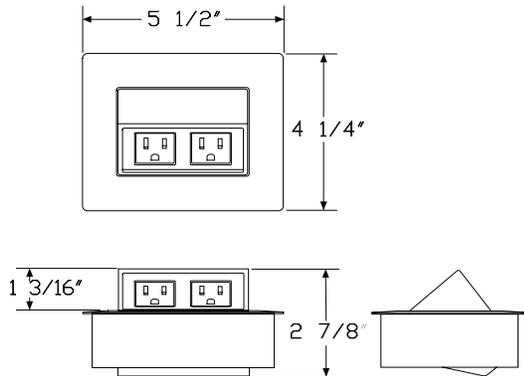

Specification Information

Step 1.

Y1322.

Step 2. Configuration

- 1** 1 simplex receptacle, 1 data opening
- 2** 2 simplex receptacles

Step 3. Power Type

- A** power cord with plug end
- B** conduit with open end, for hard-wiring

Step 4. Cord/Conduit Length

- 03** 3' cord/conduit
- 06** 6' cord/conduit
- 10** 10' cord/conduit
- 20** 20' cord/conduit

Prices for Steps 1-4.


		03	06	10	20
Y1322. 1	A	\$344	344	356	424
	B	\$416	416	428	494
	2 A	\$363	363	377	445
	B	\$436	436	451	519

Step 5. Wiring Type

- 4Z** standard +\$0
- LZ** PVC-free +\$39

Step 6. Finish

- OH** black +\$0
- OI** silver +\$0
- OJ** white +\$0




Product Information

Description
 This electrical distributor can grommet-mount flush in a surface, or clamp-mount to the edge. It can be configured with several combinations of simplex receptacles, data openings, and USB charging ports. The distributor is available with a power cord with plug end, or electrical conduit for hardwire connection. A voice/data adapter kit is included, allowing the data openings to accept various manufacturers' couplers and jacks. Attachment hardware and cord/cable clips are also included. Product is UL listed.

Notes

Field cutting of surface may be required. Information on surface cutout size is included on instruction sheet.
 Silver option (0I) and white option (0J) have painted metal trim with white plastic simplex/data interiors. Black option (0H) has black painted trim with black plastic simplex/data interior.
 Overall width for distributor with 4 openings is 8" wide. Overall width for distributor with 6 openings is 11" wide.
 USB port charges at 2.1 amps.

Dimensions

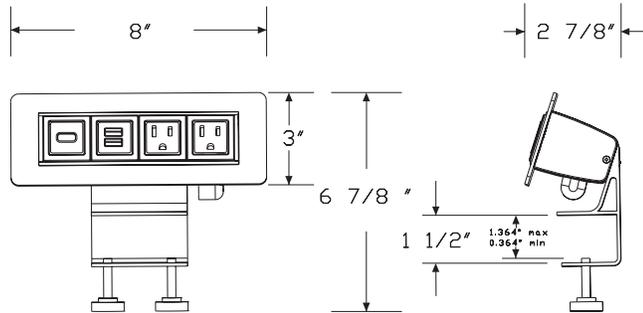

Specification Information

Step 1.

Y1323.

Step 2. Configuration

- 3** 2 simplex receptacles, 2 data openings
- 4** 3 simplex receptacles, 3 data openings
- 5** 2 simplex receptacles, 1 data opening, 1 charging USB port
- 6** 3 simplex receptacles, 2 data opening, 1 charging USB port

Step 3. Power Type

- A** power cord with plug end
- B** conduit with open end, for hard-wiring

Step 4. Cord/Conduit Length

- 03** 3' cord/conduit
- 06** 6' cord/conduit
- 10** 10' cord/conduit
- 20** 20' cord/conduit

Step 5. Attachment

- G** grommet mount
- S** surface clamp

Prices for Steps 1-5.


		03G	03S	06G	06S	10G	10S
Y1323. 3	A	\$390	390	390	390	407	407
	B	\$464	464	464	464	480	480
4	A	\$486	486	486	486	499	499
	B	\$564	564	564	564	577	577
5	A	\$546	546	546	546	562	562
	B	\$623	623	623	623	634	634
6	A	\$641	641	641	641	658	658
	B	\$719	719	719	719	733	733

20G 20S

Y1323. 3	A	\$474	474
	B	\$544	544
4	A	\$570	570
	B	\$641	641
5	A	\$629	629
	B	\$728	728
6	A	\$723	723
	B	\$828	828

Connect™-S300 *continued*

Step 6. Finish		
OH	black	+\$0
OI	silver	+\$0
OJ	white	+\$0




Product Information

Description
 This electrical distributor mounts flush in a surface and has a one-touch pop-up mechanism for accessing power and data. It can be configured with several combinations of simplex receptacles, data openings, and USB charging ports. The distributor is available with a power cord with plug end, or electrical conduit for hardwire connection. A voice/data adapter kit is included, allowing the data openings to accept various manufacturers' couplers and jacks. Attachment hardware and cord/cable clips are also included. Product is UL listed.

Notes

Field cutting of surface may be required. Information on surface cutout size is included on instruction sheet.
 Distributor with PVC-free wiring option (LZ) is Cradle to Cradle Silver Certified.
 Distributor with silver anodized finish option (OK) and standard wiring (4Z) has anodized trim with white plastic simplex/data interior.
 Distributor with silver anodized finish option (OK) and PVC-free wiring (LZ) has anodized trim with black plastic simplex/data interior.
 Overall width for distributor with openings is 8 3/4" wide. Overall width for distributor with 7 openings is 12 3/4" wide.
 USB port charges at 2.1 amps.

Dimensions

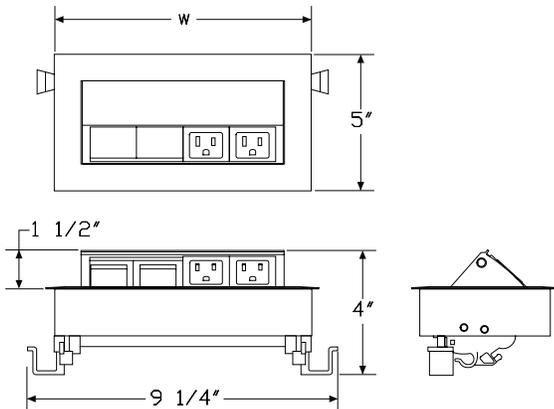

Specification Information

Step 1.

Y1324.

Step 2. Configuration

- 3** 2 simplex receptacles, 2 data openings
- 5** 3 simplex receptacles, 4 data openings
- 6** 2 simplex receptacles, 1 data opening, 1 charging USB port
- 7** 3 simplex receptacles, 3 data opening, 1 charging USB port
- 8** 3 simplex receptacles, 2 data opening, 2 charging USB ports

Step 3. Power Type

- A** power cord with plug end
- B** conduit with open end, for hard-wiring

Step 4. Cord/Conduit Length

- 03** 3' cord/conduit
- 06** 6' cord/conduit
- 10** 10' cord/conduit
- 20** 20' cord/conduit

Prices for Steps 1-4.


		03	06	10	20
Y1324. 3	A	\$544	544	559	627
	B	\$618	618	634	700
5	A	\$699	699	713	779
	B	\$773	773	782	848
6	A	\$700	700	713	779
	B	\$776	776	790	858
7	A	\$854	854	871	938
	B	\$931	931	941	1006
8	A	\$1010	1010	1024	1093
	B	\$1087	1087	1097	1161

Step 5. Wiring Type

- 4Z** standard +\$0
- LZ** PVC-free +\$39

Step 6. Finish

- OK** silver anodized +\$0



Product Information

Description

This electrical distributor mounts flush in a surface and has a flip-up lid for accessing power and data from above or below the surface. The flip lid can be closed once devices are connected for a clean visual appearance. It can be configured with several combinations of simplex receptacles, data openings, and USB charging ports. The distributor is available with a power cord with plug end, or electrical conduit for hardwire connection. A voice/data adapter kit is included, allowing the data openings to accept various manufacturers' couplers and jacks. Attachment hardware and cord/cable clips are also included. Product is UL listed.

Notes


Field cutting of surface may be required. Information on surface cutout size is included on instruction sheet.

Silver anodized option (OK) has anodized trim with white plastic simplex/data interior.

Overall width for distributor with 4 openings is 8³/₈" wide. Overall width for distributor with 6 openings is 11³/₈" wide.

USB port charges at 2.1 amps.

Dimensions

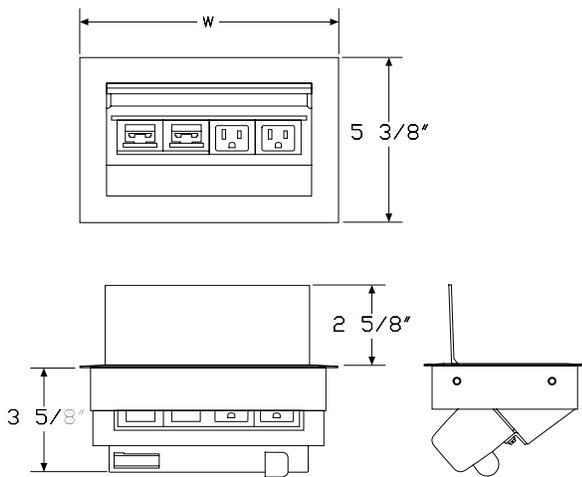

Specification Information

Step 1.

Y1325.

Step 2. Configuration

- 3** 2 simplex receptacles, 2 data openings
- 7** 3 simplex receptacles, 3 data openings
- 5** 2 simplex receptacles, 1 data opening, 1 charging USB port
- 6** 3 simplex receptacles, 2 data opening, 1 charging USB port

Step 3. Power Type

- A** power cord with plug end
- B** conduit with open end, for hard-wiring

Step 4. Cord/Conduit Length

- 03** 3' cord/conduit
- 06** 6' cord/conduit
- 10** 10' cord/conduit
- 20** 20' cord/conduit


Prices for Steps 1-4.

		03	06	10	20
Y1325. 3	A	\$640	640	657	722
	B	\$717	717	728	795
7	A	\$736	736	754	819
	B	\$813	813	827	895
5	A	\$800	800	813	879
	B	\$874	874	886	951
6	A	\$895	895	908	977
	B	\$968	968	984	1049

Step 5. Finish

- OK** silver anodized +\$0

Connect™ Single Circuit Electrical Power Entry Y1377.



Thrive™ Power and Data Support

Product Information


Description

This standard receptacle 15-amp power entry provides power for single circuit electrical distributors. Up to 8 single circuit modular electrical distributors can be daisy chained and connected in any order. If more than 8 units are connected to this power entry, the system automatically shuts down and a red LED illuminates. A green LED indicates that more units can be connected and the system is ready. Standard attachment hardware is included.

Notes

UL listed when used in conjunction with most Everywhere™ fixed height tables.
 Order electrical distributors (Y1372., Y1373., Y1374., Y1375.) and single circuit jumpers (Y1378.) separately.

Dimensions

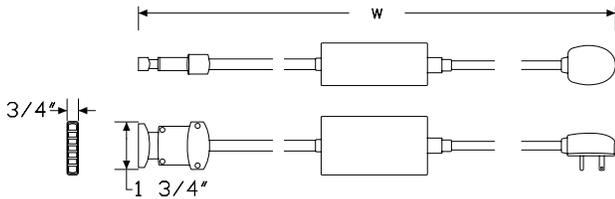

Specification Information

Step 1.

Y1377.


Step 2. Cord Length

06	6' long
10	10' long

Prices for Steps 1-2.

Y1377. 06	\$638
10	\$670

Connect™ Single Circuit Electrical Y1378. By-Pass Jumper



Product Information

Description


This electrical jumper provides additional length for the Connect™ single circuit modular electrical system. Jumpers are available in a variety of lengths and count as one of the 8 electrical distributors allowed per power entry.

Notes

UL listed when used in conjunction with most Everywhere™ fixed height tables.

Order electrical distributors (Y1372., Y1373., Y1374., Y1375.) and single circuit power entry (Y1377.) separately.

Dimensions

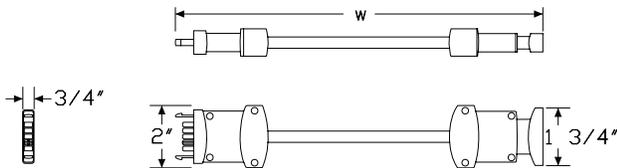

Specification Information

Step 1.

Y1378.

Step 2. Cord Length


12	12" long
24	24" long
36	36" long
48	48" long
60	60" long

Prices for Steps 1-2.

Y1378. 12	\$134
24	\$145
36	\$160
48	\$172
60	\$182

Connect™ - S720 - Connect Single Circuit Power Unit

Y1372.



Thrive™ Power and Data Support

Product Information

Description

This dedicated modular single circuit electrical distributor mounts flush in a surface and has a one-touch pop-up mechanism for accessing power and data. It can be configured with 2 simplex receptacles, or 1 simplex receptacle and 1 data opening. Cord length is 60". A maximum of 8 single circuit electrical distributors can be daisy chained per power entry. A voice/data adapter kit is included, allowing the data openings to accept various manufacturers couplers and jacks. Attachment hardware and cord/cable clips are also included.

Notes

Field cutting of surface may be required. For information on surface cutout size, see included instruction sheet.

UL listed when used in conjunction with most Everywhere™ fixed height tables.


To gang tables together per electrical code requirements, order ganging bracket kit (Y1338.) separately.

Order single circuit power entry (Y1377.) separately.

Where lengths of greater than 60" are needed, order single circuit jumpers (Y1378.) separately. Each single circuit jumper counts toward the 8 allowed electrical distributors per power entry.

Silver option (OI) and white option (OJ) have painted metal trim with white plastic simplex/data interiors. Black option (OH) has black painted trim with black plastic simplex/data interior.

Dimensions

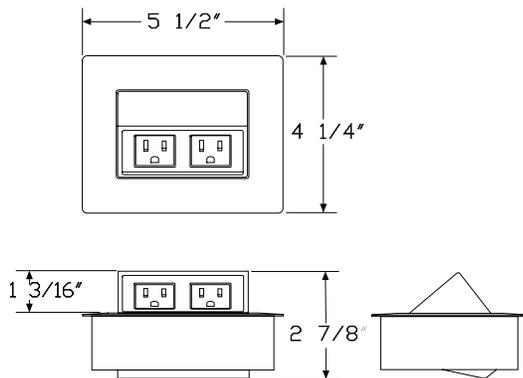

Specification Information

Step 1.

Y1372.

Step 2. Configuration

- 1** 1 simplex receptacle, 1 data opening
- 2** 2 simplex receptacles

Step 3. Cord Length

60 60" long

Prices for Steps 1-3.


	60
Y1372. 1	\$499
2	\$520

Step 4. Finish

OH	black	+\$0
OI	silver	+\$0
OJ	white	+\$0

Connect™ - S730 - Connect Single Circuit Power Unit

Y1373.



Product Information

Description

This dedicated modular single circuit electrical distributor mounts flush in a surface or with an edge clamp mount. It has 2 simplex receptacles and 2 data openings, or 2 simplex receptacles and 1 data opening and 1 USB charging port, and a 60" cord. A maximum of 8 single circuit electrical distributors can be daisy chained per power entry. A voice/data adapter kit is included, allowing the data openings to accept various manufacturers' couplers and jacks. Attachment hardware and cord/cable clips are also included.

Notes

Field cutting of surface may be required. For information on surface cutout size, see included instruction sheet.

UL listed when used in conjunction with most Everywhere™ fixed height tables.

To gang tables together per electrical code requirements, order ganging bracket kit (Y1338.) separately.


Order single circuit power entry (Y1377.) separately.

Where lengths of greater than 60" are needed, order single circuit jumpers (Y1378.) separately. Each single circuit jumper counts toward the 8 allowed electrical distributors per power entry.

Silver option (OI) and white option (OJ) have painted metal trim with white plastic simplex/data interiors. Black option (OH) has black painted trim with black plastic simplex/data interior.

USB port charges at 2.1 amps.

Dimensions

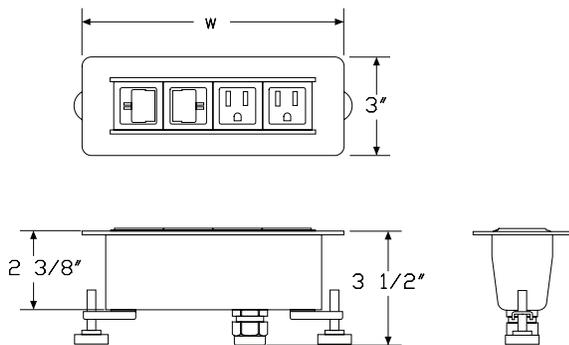

Specification Information

Step 1.

Y1373.

Step 2. Configuration

- 3** 2 simplex receptacles, 2 data openings
- 4** 2 simplex receptacles, 1 data opening, 1 charging USB port

Step 3. Cord Length

60 60" long

Step 4. Attachment

- G** grommet mount
- S** surface clamp

Prices for Steps 1-4.


		G	S
Y1373. 3	60	\$564	546
	4 60	\$719	705

Step 5. Finish

- OH** black +\$0
- OI** silver +\$0
- OJ** white +\$0

Connect™ - S740 - Connect
Single Circuit Power Unit

Y1374.



Product Information


Description

This dedicated modular single circuit electrical distributor mounts flush in a surface and has a one-touch pop-up mechanism for accessing power and data. It has 2 simplex receptacles and 2 data openings, or 2 simplex receptacles and 1 data opening and 1 USB charging port, and a 60" cord. A maximum of 8 single circuit electrical distributors can be daisy chained per power entry. A voice/data adapter kit is included, allowing the data openings to accept various manufacturers' couplers and jacks. Attachment hardware and cord/cable clips are also included.

Notes

- Field cutting of surface may be required. For information on surface cutout size, see included instruction sheet.
- UL listed when used in conjunction with most Everywhere™ fixed height tables.
- To gang tables together per electrical code requirements, order ganging bracket kit (Y1338.) separately.
- Order single circuit power entry (Y1377.) separately.
- Where lengths of greater than 60" are needed, order single circuit jumpers (Y1378.) separately. Each single circuit jumper counts toward the 8 allowed electrical distributors per power entry.
- Silver anodized option (OK) has anodized trim with white plastic simplex/data interior.
- Overall width for distributor with 4 openings is 8 1/4" wide.
- USB port charges at 2.1 amps.

Dimensions

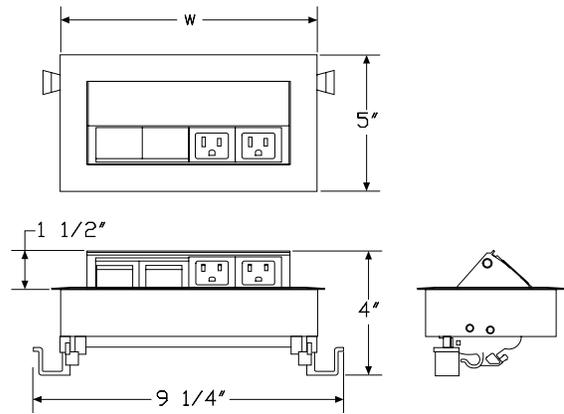

Thrive™ Power and Data Support