

PREMISE®

North America Specification Guide / Price List – June 2015



Electronic Update Page – PREMISE Price List

- The table below lists all of the updates and addendums added to this price list since the original version was created.
- All updated pages will replace the existing pages within the document.
- All new Pages will be placed at the back of the document.

Link	Date	Page	Description
Click Here	August 2015	1A-2A	New – Price Lists pages added for Receptacles with USB Charging Outlets.
Click Here	August 2015	3A-41A	New – Price List Pages added for the Enhanced Power Modules and Flip Top Units with USB Charging.



This Haworth North American price book contains US list prices. Canadian customers can convert the US list price into their Canadian equivalent by going to www.Haworth.com/Canada to find the current Canadian multipliers. These multiplier factors allow you to convert the US list price into a Canadian list price.

HAWORTH

Table of Contents

Building PREMISE

Building an Office In Five Easy Steps	8
Definition of Terms	9
Step One: Foundation Elements	13
Step Two: Upper Structure and Visual Privacy Elements	14
Step Three: Panel Connectors	15
Step Four: Power and Communications	16
Step Five: Interior Components	17

PREMISE Statement of Line and Product Details

Foundation Elements

Panels: Statement of Line	20
Super Base Panels: Statement of Line	21
Stack Components: Statement of Line	22
Base Raceway Options	23
Top Cap Options	24
Functional and Aesthetic Options	25
Monolithic Panels	26
Double Pane Glazed Panels	28
Sliding Door	29
Single Door and Frame Assembly	37
Super Base Panels	38

Panel Complements

Panel Complements: Statement of Line	40
Wing Walls	41
Full-Height Two-Piece Wing Wall	42
Upper and Lower Unit Wing Walls	43

Upper Structure Elements

Stack Kits: Statement of Line	44
Stack Kits and Designing with Slat Pads	45
10" and 16" High Stack Kit with Standard Cross Bar	46
16" High Stack Kit with Structural Cross Bar	47
Single Stack Pads	48
Single Stack Pads with Power and Communication	49
Floor-to-Ceiling Pad Sets	50

Visual Privacy Elements

Visual Privacy Elements: Statement of Line	52
Toppers and Banners	54
Canopies and Worktop Mounted Screens	55
Freestanding Screens	56
Panel Attached Screens	57
Panel Freestanding Screens	58

Panel Connectors and Trim Covers

Panel Connectors and Trim Covers: Overview	59
Panel Connectors and Trim Covers: Statement of Line	60
Panel Connectors	62
Panel Connectors and Trim Covers	69
Panel Connectors: Mount Kits	79
Variable-Height Covers for 90° and 120° Applications	81

Table of Contents

Adaptable Worksurfaces

Adaptable Worksurfaces: Statement of Line	84
Adaptable Worksurfaces: Options	86
Adaptable Worksurfaces: Edge Options	87
Adaptable Worksurfaces: Core Options	88
Adaptable Worksurfaces: Dimensions	89
Adaptable Worksurfaces: Wireway Options	102
Adaptable Worksurfaces: Wireway Options and Locations	103
Adaptable Worksurfaces: No Wireway Option	107
Adaptable Worksurfaces: Brackets	108
Adaptable Worksurfaces: Product Applications	109
Worksurface Support	112

Upper Storage, Task Lights, and Task Organization

Upper Storage, Task Lights, and Task Organization: Statement of Line	113
Upper Storage	116
Adaptable Task Lighting	118
Adaptable LED Task Light	119
Worksurface Accessories: Overview	120
Task Organization	122
Worksurface Accessories: Monitor Arm	123
Worksurface Accessories: Adjustable Keyboard Pads	126
Worksurface Accessories: Adjustable Keyboard Pads and Mouse Pads	127
X Series® and V Series® Files and Storage	128

Tables

Tables: Statement of Line	129
---------------------------------	-----

PREMISE Product Application

Planning Vertically	136
Panel Configuration Options	137
Panel Connections: 90°	139
Panel Connections: 120° and Connector Covers	141
Specifying Panel Connectors and Covers	142
Variable-Height Covers	147
Specifying Variable-Height Covers	150
Specifying Connectors	151
Designing 120° Workspaces	163
Off-Modular	169
Floor-to-Ceiling	179
Door Assemblies	183
Wing Walls	184
Worksurface Support: Statement of Line	189
Specifying Worksurface Support	190
Worksurface Support: Rear Corner Bracket	194
Worksurface Support: Standard Shared Cantilever Bracket	195
Worksurface Support: Side Bracket	196
Worksurface Support: Rectangular Radius End Worksurface	197
Worksurface Support: Rectangular Split-Top Worksurface	198
Worksurface Support: Corner, 90° Split-Top Worksurface	199

Table of Contents

PREMISE Product Application, continued

Worksurface Support: Split-Top Worksurface 201

Adaptable Worksurface: Countertops 202

Specifying Worksurface Support 203

Designing with Overhead Storage Units: On-Modular 204

Designing with Overhead Storage Units: Off-Modular 205

Designing with Overhead Storage Units: Up-Mount Off-Modular 206

Designing with Visual Privacy Elements: Toppers 207

Designing with Visual Privacy Elements: Canopies..... 212

Designing with Visual Privacy Elements: Banners 216

Visual Privacy Elements and Up-Mount Storage Units..... 217

Support and Load Guidelines 218

Support and Load Guidelines: Wall Track 226

Support and Load Guidelines: Wall Mount Overhead Storage Unit 228

Support and Load Guidelines: Wall Mount Components 229

Support and Load Guidelines: Worksurface Wall Bracket 230

Application Guidelines: Worksurface Wall Bracket 232

Power and Cable Management

Power and Communication: Introduction 238

Power Statement of Line..... 239

Base Feed Modules 240

Wall Feed Module 242

Top Feed Modules 244

Infeed Harness 248

Powered Panels 249

Power Kits..... 250

Power Connectors 252

Receptacles 256

Electrical and Wire Management..... 258

Flip Top Unit: Details..... 259

Power Basics 260

Power Planning General Guidelines and Checklist 262

Power Distribution for Hardwire Applications 263

International Power Management 264

Cable Management: Introduction 265

Base Raceway: Communication Options and Dimensions..... 266

Data Access: Data Brackets..... 267

Cable Management 268

Technical Specifications274

Price List283




PREMISE Overview



Building an Office in Five Easy Steps

When planning with PREMISE, start at the bottom and work your way up. Use panels, Stack Kits, Toppers, banners and Canopies to divide space and establish varying levels of privacy. Then determine which panel connector functionality and aesthetics is best for your application. Identify power and communication components required to support the user needs. Finally, add functionality to each workspace defining personal components such as worksurfaces, storage units, casegoods, lighting and accessories.

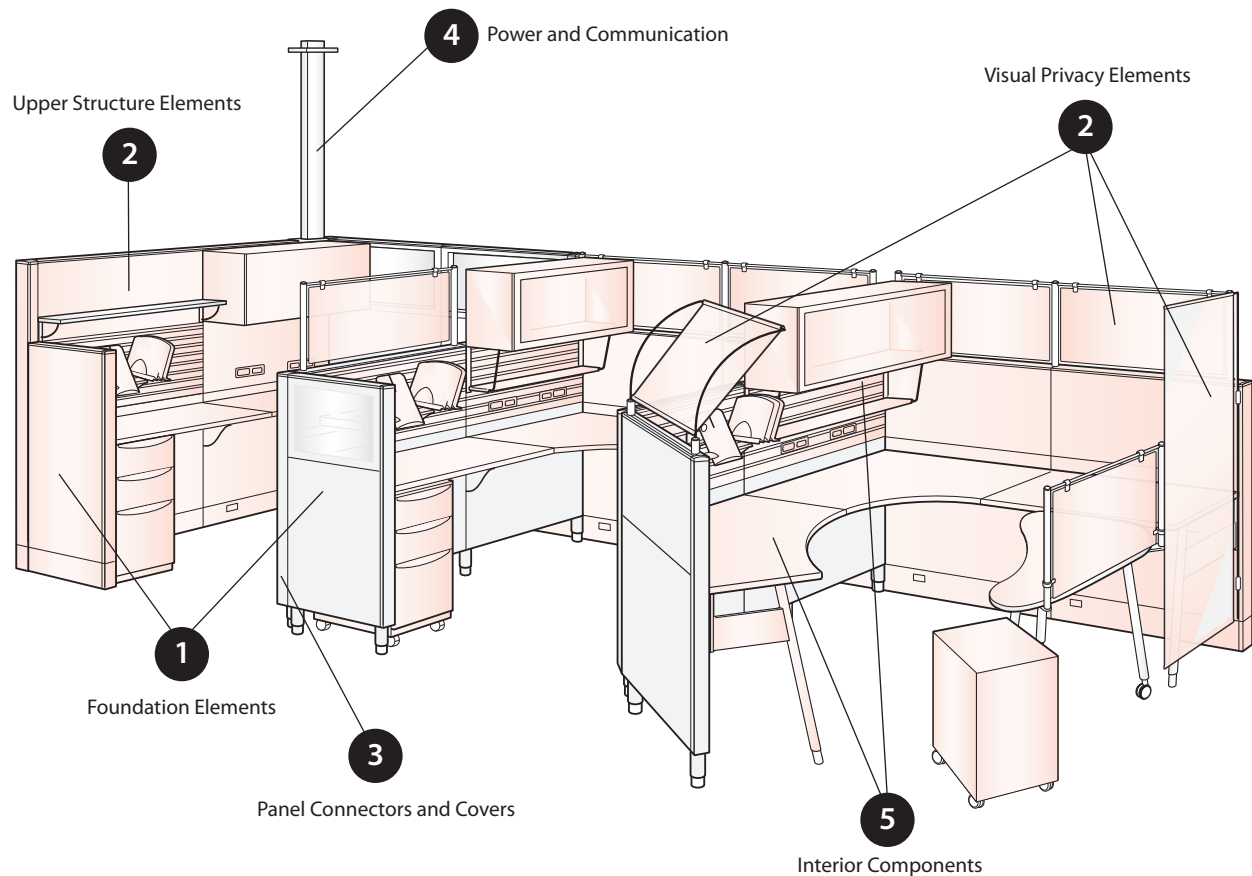


The decisions you make in the early design steps will impact the overall flexibility of the product application, aesthetics and power and communication capabilities. Smart design starts with looking ahead to project possible future growth or reconfiguration needs while planning the initial product.


Definition of Terms

Foundation Elements are used as the starting point of a panel configuration. There are two types:

- **Monolithic Panel:** available in multiple sizes to meet various design requirements.
 - Fabric/Acoustical/Tackable
 - Glazed
 - Single Door
- **Super Base Panel:** 32" high Super Base Panel with removable pads provides additional flexibility to meet multiple design and utility requirements.
 - Available in a number of surface materials



Monolithic Panel



Super Base Panel


- Notes**
- Monolithic panels include doors and glazed panels as well as fabric/acoustical/tackable panels.
 - Monolithic and Super Base Panels are available with a powered base raceway, non-powered closed base raceway, or as open base panels.

- Tip** All Foundation Elements require separately specified Panel Connectors.


Upper Structure Elements can be added to a Foundation Element for additional privacy or functionality.

Upper Structure Elements include:


- **Stack Kit:** includes cross bar and two pads.
- **Stack Pad:** an individual pad. Two stack pads and a cross bar is equivalent to a stack kit.
- **Floor-to-Ceiling Pad Set:** a complete kit that creates an enclosed office environment when used with ceiling track.



Stack Kits or Stack Pads
with Cross Bar



PREMISE Single
Technology Pad




Floor-to-Ceiling Pad Set

- Tip** All Upper Structure Elements require separately specified Panel Connectors.


Definition of Terms

Visual privacy elements: Toppers, Canopies and banners bring an alternative aesthetic to PREMISE applications. Lightness in scale and materials in addition to the open base panel offer many design options to choose from.

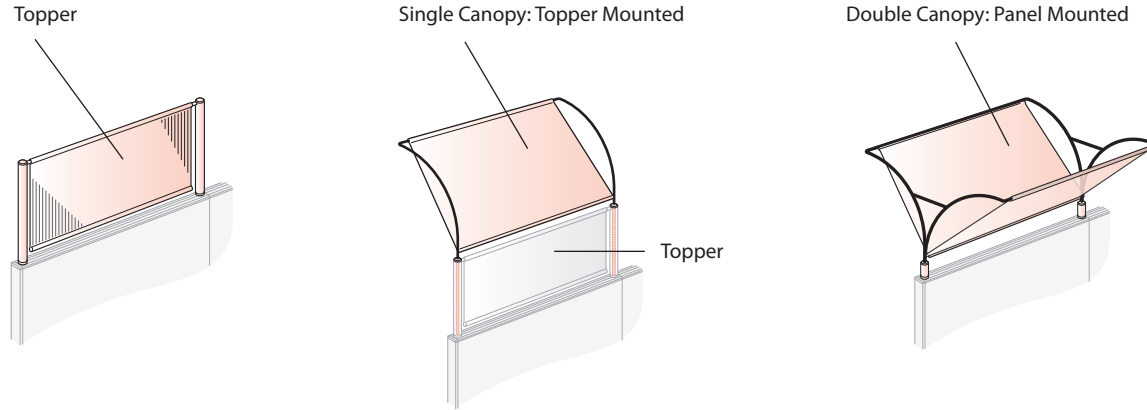

Panel mounted visual privacy elements can be added to a Foundation Element or an Upper Structure Element.


- Toppers utilize a Grooved Top Cap located above a Foundation Element or above a stack kit. They offer visual privacy with user control
- Desk or floor height banners also provide visual privacy and promote "way-finding" capabilities in high density layouts
- Canopies, top cap mounted or Topper mounted, provide visual privacy and a sense of shelter

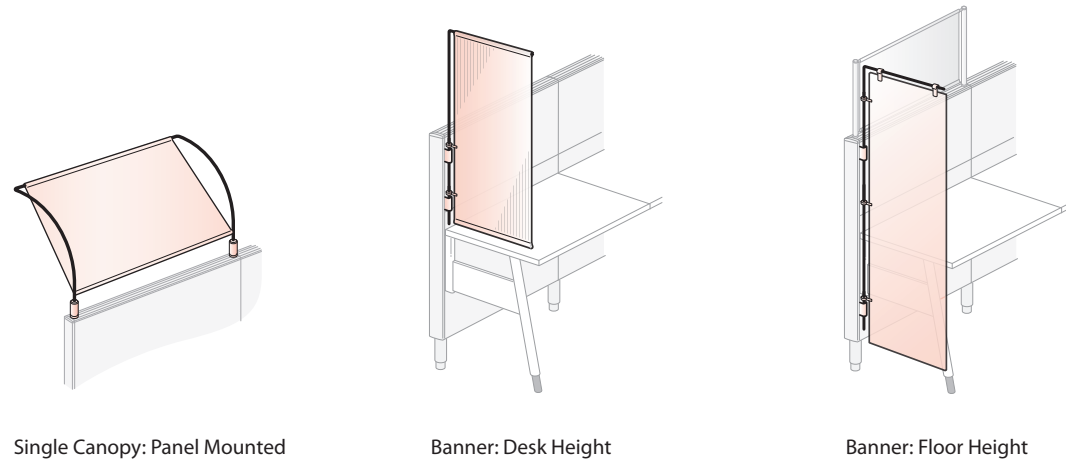


Definition of Terms

Panel Configurations


A Panel Configuration is a vertical panel application consisting of a Foundation Element or a Foundation Element with Upper Structure Element(s). Panel configurations require Panel Connectors to attach to each other.



Monolithic Panel

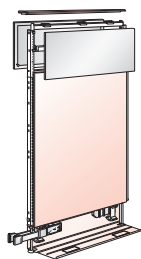


Monolithic Panel with Stack Kit

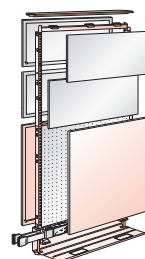

Super Base Panel with Stack Kits

Panel Configurations with Visual Privacy Elements

Visual privacy elements are not considered part of a Panel Configuration because they do not utilize Panel Connectors.

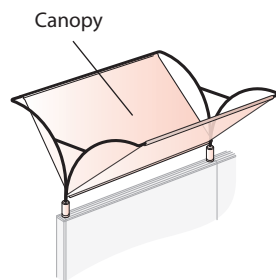


Panel Configuration:

- Monolithic panel

Visual Privacy Element:

- Canopy: panel mounted

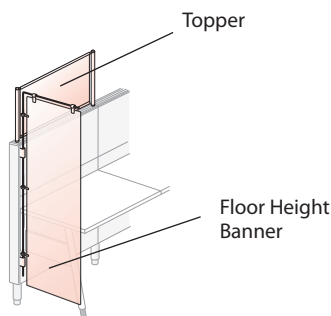


Panel Configuration:

- Super Base Panel with Stack Kit

Visual Privacy Elements:

- Topper
- Floor Height Banner

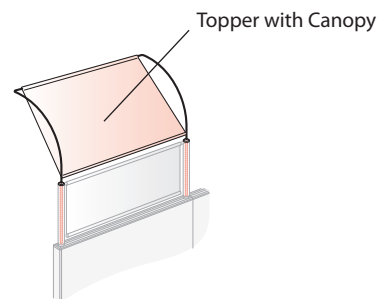

Stackable Panel Configuration:

- Super Base Panel with Stack Kit

Visual Privacy Elements:

- Topper
- Canopy: Topper mounted




Understanding that a panel configuration never includes visual privacy elements (Toppers, Canopies, and Banners) will help you specify the appropriate panel heights.


Definition of Terms

Panel Connectors with Covers are used to attach panel configurations to each other in the ways illustrated below. All are 2-Way 90°.


2-Way 90°




Full-Height Connector with Full-Height Cover for a Closed Base Condition




Full-Height Connector with Pre-Configured (sectional) Cover for a Closed Base Condition




Full-Height Connector with Full-Height Cover for a Closed Base Condition




Full-Height Connector with Full-Height Cover for an Open Base Condition




Full-Height Connector with Pre-Configured (sectional) Cover for an Open Base Condition

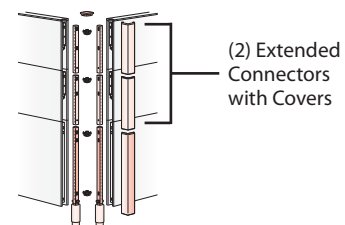


Full-Height Connector with Full-Height Cover for an Open Base Condition



Full-Height Connector with Full-Height Cover for a Mixed Base Condition



Full-Height Connector with Pre-Configured (sectional) Cover for a Mixed Base Condition

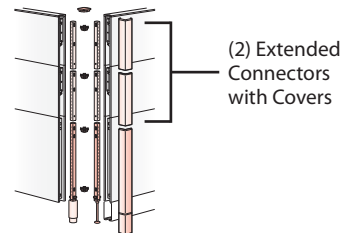

Full-Height Connector with Full-Height Cover for a Mixed Base Condition


Step One: Foundation Elements

Determine the Foundation Element functionality and surface options that works best for your application. If cost-effectiveness is important, specify Monolithic Panels. If surface material options or flexibility, off-modular capabilities, or power and communications management is a priority, choose Super Base Panels. Both panel types can be used together to meet multiple budget and design requirements.

Monolithic and Super Base Panels are available with a powered base raceway, non-powered closed base raceway, or as open base panels. For a custom base raceway application, specify powered panels without a raceway cover and separately specify the raceway covers with power and communication port locations to accommodate specific utility needs.

When planning Foundation Elements, you should consider:

- Future needs
- Privacy requirements
- Reconfiguration frequency
- Off-modular flexibility
- Power and communication routing and access locations
- Surface options: aesthetics
- Budget

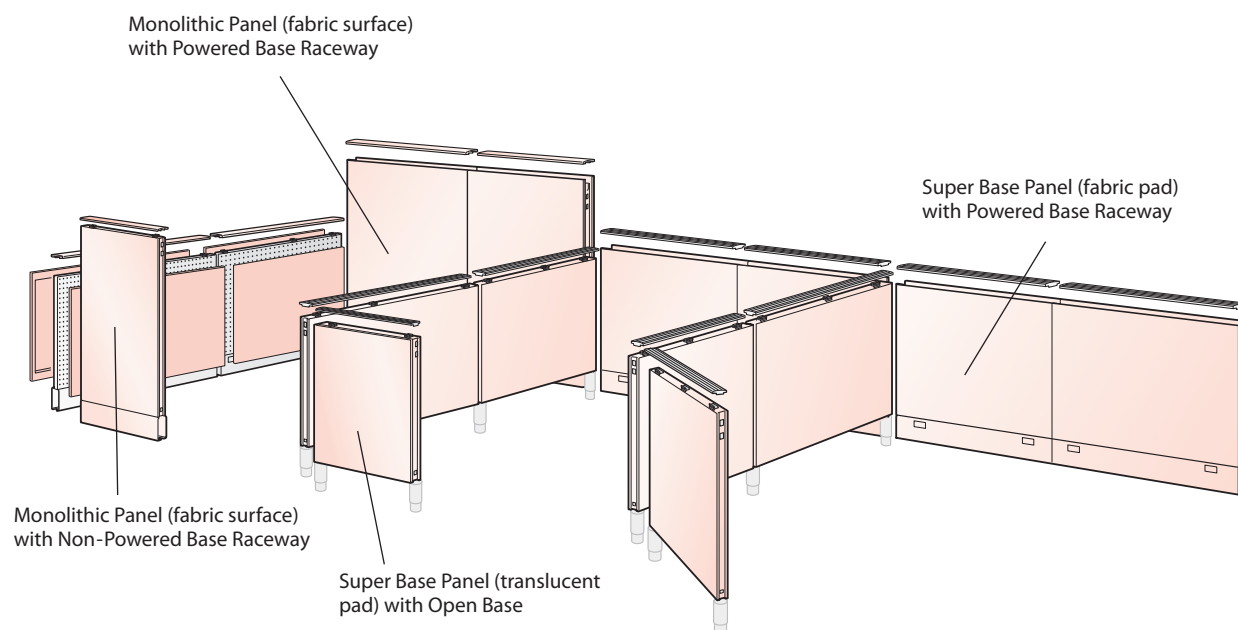

Tips

- Specifying lower Foundation Elements with a variety of Upper Structure Elements will provide maximum flexibility for future changes in panel heights.
- Specifying Super Base Panels will provide greater flexibility, as they offer removable pads with additional surface options as well as power and cable routing options.
- Wing Walls may be used instead of Foundation Elements and Upper Structure Elements, for privacy, division of space, and limited worksurface support. See Product Details for application guidelines.


Notes

- Refer to Product Details for more information regarding Foundation Elements.
- Base raceway power options for Super Base and Monolithic Panels include 3- and 4-Circuit applications. Refer to Power and Cable Management.
- Refer to Technical Specifications for details on the manufacturing process and material composition of panels and all other components.

Step Two: Upper Structure and Visual Privacy Elements

Panel height is the next decision. Determine the upper structure functionality and look that works best for your application. For power and communication access at beltline or standing height, choose the PREMISE Single Technology Pad.

Whatever the need is, Stack Kits provide a solution ranging from basic surface materials — painted, fabric, clear glazed, patterned glazed to functional pad types – slat pad for use with Belong and Jump Stuff accessories, markerboard pads, or technology pad for power and communication needs. If you are looking for a unique design statement use perforated, translucent, or wood pads. The diverse offering of stack pads and Visual Privacy Elements such as Toppers, Canopies, and banners can be used together to meet multiple budget and design requirements.

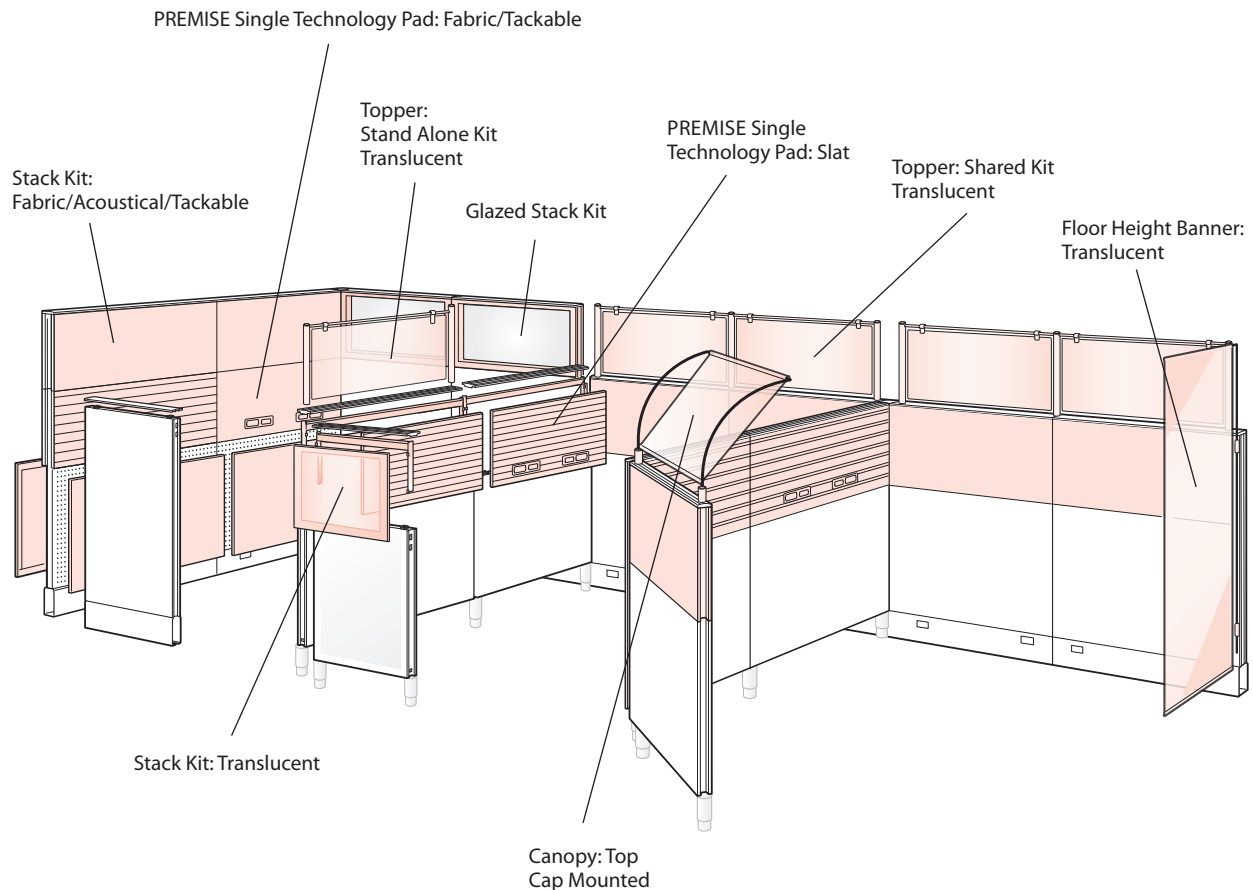


- A panel configuration cannot exceed 120" (3048mm) in height.

Note

See Product Details for more information regarding upper structure and visual privacy elements.

Step Three: Panel Connectors

Now you're ready to put it all together with Panel Connectors and Variable-Height Covers. Once again, determine the functionality and look that works best for your application. If cost-effectiveness is important and flexibility in panel reconfiguration is not a priority, choose Full-Height Connectors and covers. To maximize the flexibility of this truly flexible system, choose pre-configured Sectional Connectors and covers. Or use a combination of Full-Height Connectors and covers for the remaining upper structure to achieve a pre-determined level of flexibility.

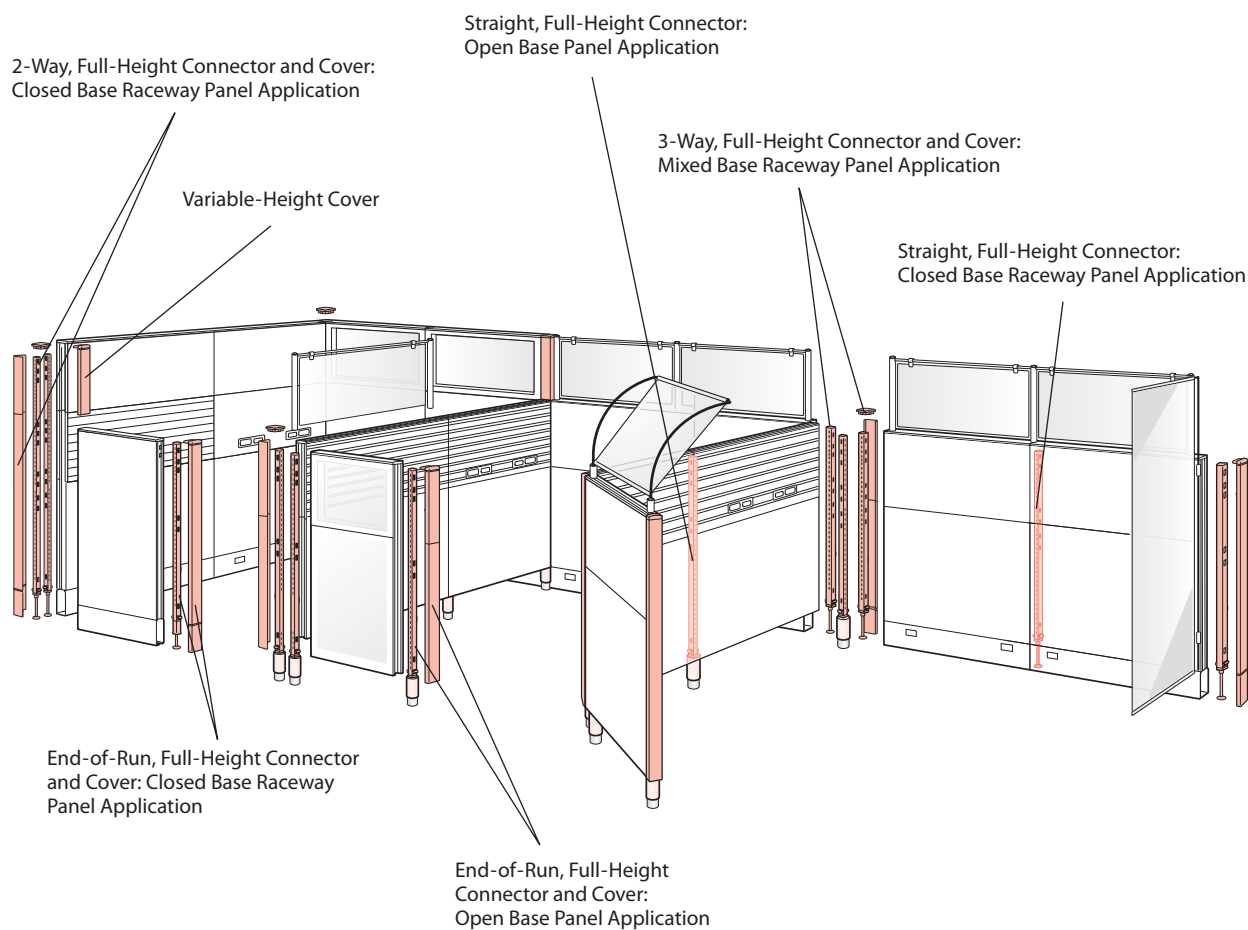

Tips

- Remember to specify the Panel Connector functionality to match the base raceway application for closed or open base raceway panels.
- Extended Connectors provide additional flexibility for reconfiguration purposes. Full-Height Connectors and covers are more cost-effective and offer greater strength.

Note

See Product Details for a more detailed explanation of connectors and covers.


Step Four: Power and Communications

Activate your earlier power and communication selections within the base raceway or work-height power application by adding the proper components to route and access power and communication requirements.

Basic utility components may include:

- A power in-feed module for the base raceway or work-height application, or a panel Top Feed Module
- Base raceway or work-height power connector which pass power in a horizontal straight, 90° or 120° power condition
- A vertical power harness which passes power from the base raceway to a work-height power application
- Power kits which provide power for work height ported pads
- And finally, power receptacles used to access base raceway power ports or work-height ported pads

Refer to Power and Communication Product Application section for specification guidelines.

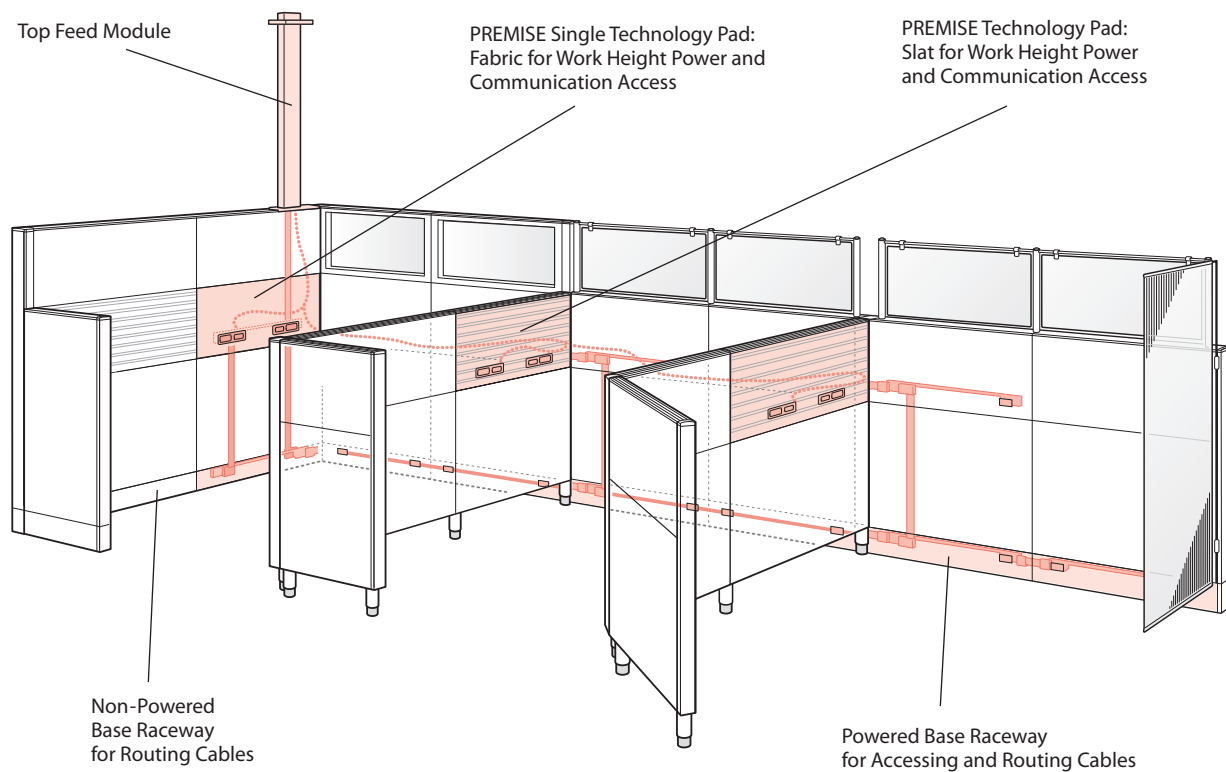

Tips


- Super Base and Monolithic fabric panels have equal power capabilities within the base raceway.
- Super Base Panels provide greater power and communication capabilities than a Monolithic fabric panel.

Note

See Power and Cable Management section for cable routing and access options.

Step Five: Interior Components

Adding interior components further defines the workspace functionality. Choose from panel mounted worksurfaces with separately specified support elements or freestanding tables. Overhead storage options range from up-mounted to standard mounted units with on-modular or off-modular capabilities. Pedestals are available in a variety of drawer configurations as mobile or attached units. Or maybe personal storage towers are the best choice for your application — they provide upper and lower storage in a freestanding or mobile vertical case. For paper management; choose from Belong or Jump Stuff.

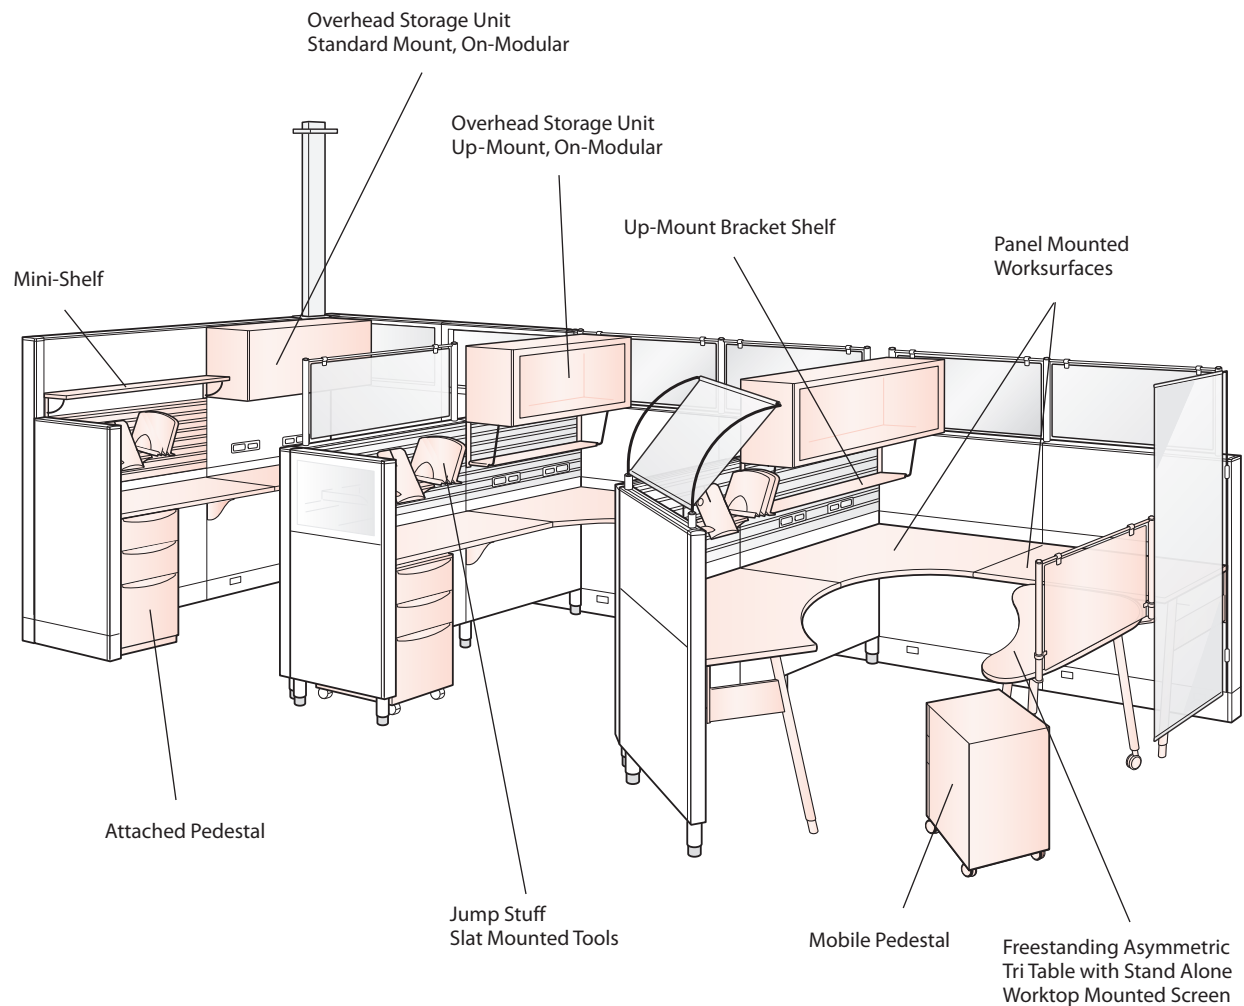

Tip All panel-mounted worksurfaces require separately specified support elements.

- Notes**
- See Product Details for the worksurface vocabulary. Refer to Product Application Guidelines for worksurface support options and rules.
 - See Product Details for the upper storage and lower storage vocabularies. Refer to Product Application Guidelines for storage unit support and load data.
 - See Haworth's Steel Caseloads, Files, and Storage and Wood Caseloads Price Lists for additional product options that can be specified to complement PREMISE.





**PREMISE Statement of Line
and Product Details**


Foundation Element: Panels

Fabric Acoustical Tackable Panels


- With Standard Top Cap
- With Grooved Top Cap
- With Wood Top Cap
- Without Top Cap



Non-Powered with Raceway cover



Powered 3- or 4-Circuit with Raceway Cover



Powered 3- or 4-Circuit without Raceway Cover



Open Base No Base Raceway



Available in six panel heights. Refer to Price List for heights and widths.

Glazed Panels

- With Standard Top Cap
- With Wood Top Cap



Non-Powered with Raceway Cover



Powered 3- or 4-Circuit with Raceway Cover



Powered 3- or 4-Circuit without Raceway Cover




Open Base No Base Raceway



Glazed panels are 24" wide. Available 64" and 80" high.

Single Door

- With Standard Top Cap
- With Wood Top Cap

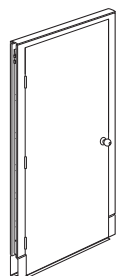

Foundation Element: Super Base Panels


Super Base Panels are available with same surface pad sets, mixed surface pad sets, or without any pads. The Super Base Panel with pad set includes two pads with attachment brackets, panel core and panel locks.

- Mixed surface pad sets have different pad types on each side of the panel. For the same pad type on each side of the panel refer to same surface pad sets
- The translucent pad surface is only available as same surface pad set due to the semi-transparent aesthetic attributes. Perforated pads are also only offered as same surface Stack Kits


Super Base Panel with Pad Set

Available with:


- Standard Top Cap
- Grooved Top Cap
- Wood Top Cap
- Without Top Cap




Non-Powered with raceway cover




Powered 3 or 4 circuit with raceway cover



Powered 3 or 4 circuit without raceway cover



Open Base no base raceway

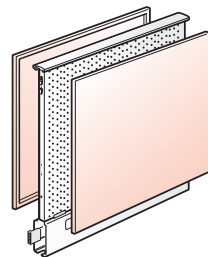

Side 1 pad surface
or
Side 2 pad surface

Same Surface Pad Set


PAD SURFACE
Painted
Fabric/Tackable
Fabric/Acoustical/Tackable
Wood
Perforated
Translucent

Mixed Surface Pad Set


PAD SURFACE: SIDE 1	PAD SURFACE: SIDE 2
Painted	Fabric/Tackable
Painted	Fabric/Acoustical/Tackable
Fabric/Tackable	Fabric/Acoustical/Tackable
Fabric/Tackable	Wood
Fabric/Acoustical/Tackable	Wood

Tip Super Base Panels are 32" high. Refer to Price List for available pad widths.


Super Base Panel without Pad Set




Non-Powered with raceway cover



Powered 3 or 4 circuit with raceway cover




Powered 3 or 4 circuit without raceway cover



Open Base no base raceway


Tip Specify this option for use with Pre-Configured (sectional) Matching Wood Pad Sets or for use with Off-Modular Single Pads.

Foundation Element: Stack Components




Single Pad for Super Base Panel

- Painted
- Fabric/Tackable
- Fabric/Acoustical/Tackable
- Translucent
- Perforated
- Wood

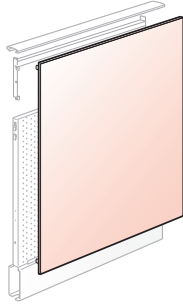

Monolithic Single Pad for Super Base Panel with Stack

- Fabric/tackable
- Panel configuration heights: 42", 48", 58" and 64"
- For use with separately specified Super Base Panel without Pad Set.




Off-Modular Single Pad for Super Base Panel

The 7" high upper rail and the 2" high lower rail allow for off-modular component attachments. The 16" high center pad is available in the following surface options:

- Painted
- Fabric/Tackable
- Fabric/Acoustical/Tackable
- Translucent
- Perforated
- Wood
- For use with separately specified Super Base Panel without Pad Set.


Tips

- Super Base Panels are 32" high. Refer to Price List for available pad widths.
- For Off-Modular pad applications refer to the Off-Modular Product Application Section for guidelines.



Foundation and Upper Structure: Stack Component Pre-Configured (sectional) Matching Wood Pad Sets – Super Base Panel

- Specify this pad set option for a vertical wood grain and color match between vertical pads
- Separately specify Super Base Panel without pads and a standard cross bar for each stack level

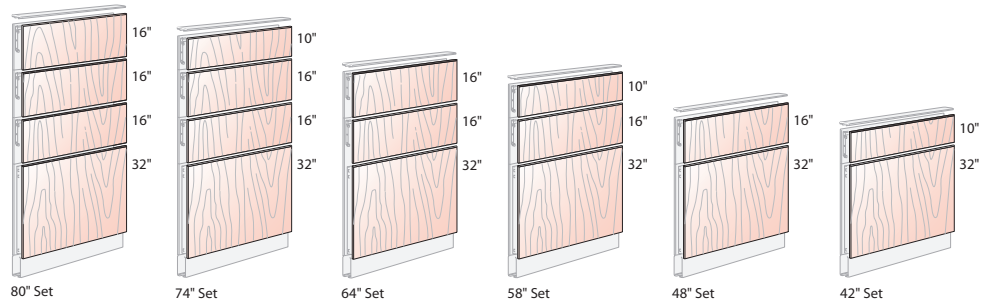


Foundation Element: Base Raceway Options



Non-Powered Base Raceway with Cover

- The base raceway cover is a one-piece construction without cut-outs
- Non-powered panels may be upgraded to a powered panel by separately specifying a retrofit power kit




Powered Base Raceway with Cover

- The base raceway cover is a one-piece construction with two cut-outs on each side of the cover for separately specified triplex receptacles
- Powered panels include a PDA (power distribution assembly) for 3 circuit power applications. Refer to Price List for availability for specific panel types



- 18" wide panels are not available with a powered base raceway.

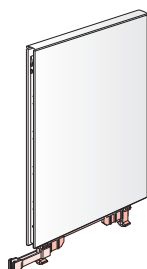

Powered Base Raceway without Cover

- Does not include base raceway cover. Specify this option if the receptacle locations in the standard powered raceway cover are not sufficient for the initial power requirements or if factory installed communication ports are required
- Individually specified base raceway covers are available in a variety of power and communication port configurations
- Specify the appropriate base raceway cover to meet specific power and communication needs
- Powered panels include a PDA (power distribution assembly) for 3 circuit power applications. Refer to Price List for 3 circuit availability for specific panel types




Non-Powered Open Base Panel

- This option does not have a base raceway. The panel is open 6 $\frac{3}{4}$ " above the floor
- Specify open base panels to lighten-up the aesthetics, increase air circulation and allow easy access for cleaning beneath panels

Note


Standard trim colors available at the base list price. Metallic trim colors available at an upcharge.

Foundation Element: Top Cap Options



Standard Top Cap

- Steel top cap




Grooved Top Cap


- Aluminum top cap with three channels
- A panel with Standard Top Cap may be upgraded to a Grooved Top Cap by separately specifying a Grooved Top Cap. Only applicable if the panel type is available with a Grooved Top Cap option as the initial product specification
- The center channel is for attaching the following visual privacy elements; panel Toppers and panel mounted Canopies

Tips


- Grooved Top Caps 72" – 120" are designed to span two or more panels. Refer to the Price List for specific panel widths.
- The no top cap option is offered to reduce the number of top cap seams within a panel run. To be used with a separately specified Grooved Top Cap long enough to span more than one panel. Refer to Grooved Top Cap for applications details.
- The no top cap option must be used with a separately specified Grooved Top Cap.
- Grooved Top Caps are not available on glazed panels.



Topper




Single Canopy




Double Canopy


- The outer channels are for attaching off-modular components; off-modular Overhead Storage Units and Off-Modular Return Panels



Standard Overhead




Up-Mount Overhead



Off-Modular T-Mount

Note Standard trim colors available at the base list price. Metallic trim colors available at an upcharge.



Wood Top Cap


- Wood Veneer Top Cap
- Available in several wood species

Foundation Element: Functional and Aesthetic Options

	MONOLITHIC – FABRIC/ ACOUSTICAL/TACKABLE	SUPER BASE PANEL	MONOLITHIC GLAZED	MONOLITHIC SINGLE DOOR
BASE RACEWAY OPTION:				
Non-Powered with Raceway Cover	•	•	•	
Open Base Panel: Non-Powered without Raceway Cover	•	•	•	
3-Circuit Power with Raceway Cover	•	•	•	
4-Circuit Power with Raceway Cover	•	•	•	
3-Circuit Power without Raceway Cover	•	•	•	
4-Circuit Power without Raceway Cover	•	•	•	
TOP CAP OPTION:				
Standard: painted	•	•	•	•
Grooved: painted	•	•		
Wood	•	•	•	•
MONOLITHIC SURFACE OPTIONS:				
Fabric	•			
Glazed: Clear		Laminate	•	
Wood				•
				•
SUPER BASE SURFACE OPTIONS: (AVAILABLE AS ON-MODULE OR OFF-MODULE PADS)				
Painted: Type "P" pad				
Perforated: Type "H" pad		•		
Fabric/Tackable: Type "F" pad		•		
Fabric/Acoustical/Tackable: Type "A" pad		•		
Wood: Type "W" pad		•		
Translucent: Type "X" pad		•		
Without Pads: Type "N" no pad option		•		
		•		

- Notes**
- Pre-Configured matching wood pad sets are available for the Super Base with Upper Structure Elements.
 - Wing Walls can be used in place of a Return Panel. Available non-powered with a painted surface.

Monolithic Panels



Monolithic Panels

Monolithic panels are the foundation of the PREMISE modular furniture system. They are used in multiple configurations to divide space, create different levels of privacy, route utilities and support components. PREMISE Monolithic Panel types include fabric, glazed, or a single door assembly.

Fabric Surface

The PREMISE Monolithic Panel surface utilizes a full fabric covering that can be specified to accommodate different fabrics on each side of the panel. The entire fabric panel surface is tackable and acoustical. Each panel features integrated raceways located at the top, bottom and sides of the panel frame. Power and communication can be routed and accessed at the base raceway. Vertical and top channels are used to route but not access utilities cabling. Power and communications can also be accessed above or below worksurface or at standing height through the use of a separately specified and installed power/communications port kit. Top caps and base raceway covers conceal power and communications cabling.

Fabric Surface Options

- Available in a multitude of fabric grades for pricing flexibility
- Optional Customer’s Own Material (COM) can be specified. Refer to COM information located in the back of the Price List for program details
- Mixed fabric grades can be specified for each side of the panel. The panel will be priced at the higher grade fabric

Fabric Surface Panel Dimensions

HEIGHTS:	WIDTHS:
32" (813mm)	18" (457mm)
42" (1067mm)	24" (610mm)
48" (1219mm)	30" (762mm)
53" (1346mm)	36" (914mm)
64" (1626mm)	42" (1067mm)
80" (2032mm)	48" (1219mm)
	60" (1524mm)

Tip See the Price List for information on how to specify available panels power and communication.

- Notes**
- Some building codes may restrict the use of panel heights greater than 69" (1753mm). Consult your local code authority to assure that furniture layout is compliant prior to installation.
 - Metallic trim colors are available at an upcharge.

Monolithic Panels

Top Cap Options

- Standard Top Cap in painted steel
- Grooved Top Cap in painted aluminum. For use with:
 - Visual Privacy Elements; panel attached Toppers and/or Canopies
 - Off-modular applications; off-modular Overhead Storage Units and Off-Modular Return Panels
- Grooved Top Cap restricts top trough cable management
- The standard and Grooved Top Caps are available in standard trim colors at the base list price
- Wood Veneer Top Cap is available in a variety of wood species

Tip

Top caps and base raceway covers may be specified with different trim colors.

Base Raceway Cover Options

- The two sided base raceway cover is a one-piece design
- A non-powered base raceway cover is continuous in appearance without any ports for power and communication
- A powered base raceway cover features two electrical ports on each side
- The cover is available in standard trim colors at the base list price

Power Options

- Panels are available non powered with a base raceway cover or non-powered as an open base panel
- Panels are available as powered panels with a PDA, (power distribution assembly). This option is available with a standard base raceway cover or with a separately specified base raceway cover for specific power and communication port locations
- Powered panels available in 3 or 4 circuit Power Base systems for 120 volt, 60 Hz power sources. See Price List for specific and additional power information


Tips

- See the Price List for information on how to specify available panels power and communication
- All powered panels are shipped with one Power Base power distribution assembly and 0.95 flexible connector for 3-Circuit and 4-Circuit.
- Separately specified retrofit kits turn non-powered panels into powered panels.

Notes

- See Power and Cable Management Section for power and cable configuration options possible with a Monolithic Panel.
- Metallic trim colors are available at an upcharge.

Double Pane Glazed Panels

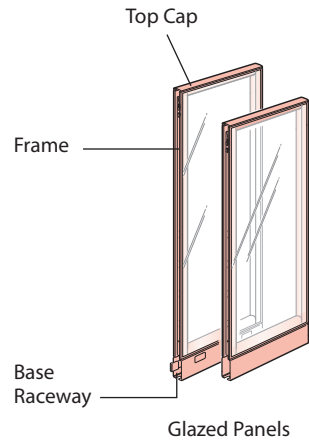

The PREMISE glazed panel utilizes a double-pane construction. The panels can be specified with clear safety glass.

Panel inclusive of base raceway covers or with separately specified base raceway covers feature integrated raceways located at the bottom and top of the panel frame (does not include vertical side channels). Power (3-Circuit and 4-Circuit) base raceway panels allow power and communication to be routed and accessed at the base raceway.

Double Pane Glazed Panel Dimensions

HEIGHTS:

64" (1626mm)

80" (2032mm)

WIDTH:

24" (610mm)

Glazing Treatment

- Standard surface available in clear

Frame Trim Cover

- Available in standard trim colors at the base list price

Top Cap Options

- Standard Top Cap in painted steel
- Available in standard trim colors at the base list price
- Wood Veneer Top Cap is available in a variety of wood species
- Grooved Top Cap option is not available due to depth of top raceway channel

Base Raceway Cover Options

- The two sided base raceway cover is a one-piece design
- A non-powered base raceway cover is continuous in appearance without any ports for power and communication
- A powered base raceway cover features two electrical ports per each side of the cover for receptacles access
- The cover is available in standard trim colors at the base list price

Power Options

- Panels are available non-powered with a base raceway cover or non-powered as an open base panel
- Panels are available as powered panels with a PDA, (power distribution assembly) This option is available with a standard base raceway cover or with a separately specified base raceway cover for specific power and communication port locations
- Powered panels available in 3-Circuit and 4-Circuit Power Base systems for 120 volt, 60 Hz power sources. See Price List for specification and additional power information

Tips

- Separately specified retrofit kits turn non-powered panels into powered panels
- Painted steel top caps and base raceway covers may be specified with different trim colors.

Notes


- Some building codes may restrict the use of panel heights greater than 69" (1753mm). Consult your local code authority to assure that furniture layout is compliant prior to installation.
- Metallic trim colors are available at an upcharge.

Sliding Door: PREMISE

Sliding Doors provide an effective means to divide space and create visual privacy.

- Sliding Doors must mount on a panel equal to or taller than the height of the Sliding Door.
- Sliding Doors can mount on any panel the same width or wider, for example:
 - 36" wide Sliding Door can mount on a 36" wide or wider Panel or a combination of panel widths totalling 36".
- Sliding Doors are non-load bearing and available with clear glazed and frosted acrylic surface options.
- Sliding Door Attachment Brackets are product line specific.
- Sliding Doors are available locking or non-locking and cannot be retrofitted.
- Sliding Door slides along Threshold Track on wheels with 1¼" adjustment.
- Threshold Track meets ADA guidelines.
- Sliding Door Threshold Track length:
 - 71¼" on a 36" wide Sliding Door
 - 83¼" on a 42" wide Sliding Door


Widths: 36" and 42"
Heights: 64" and 80"

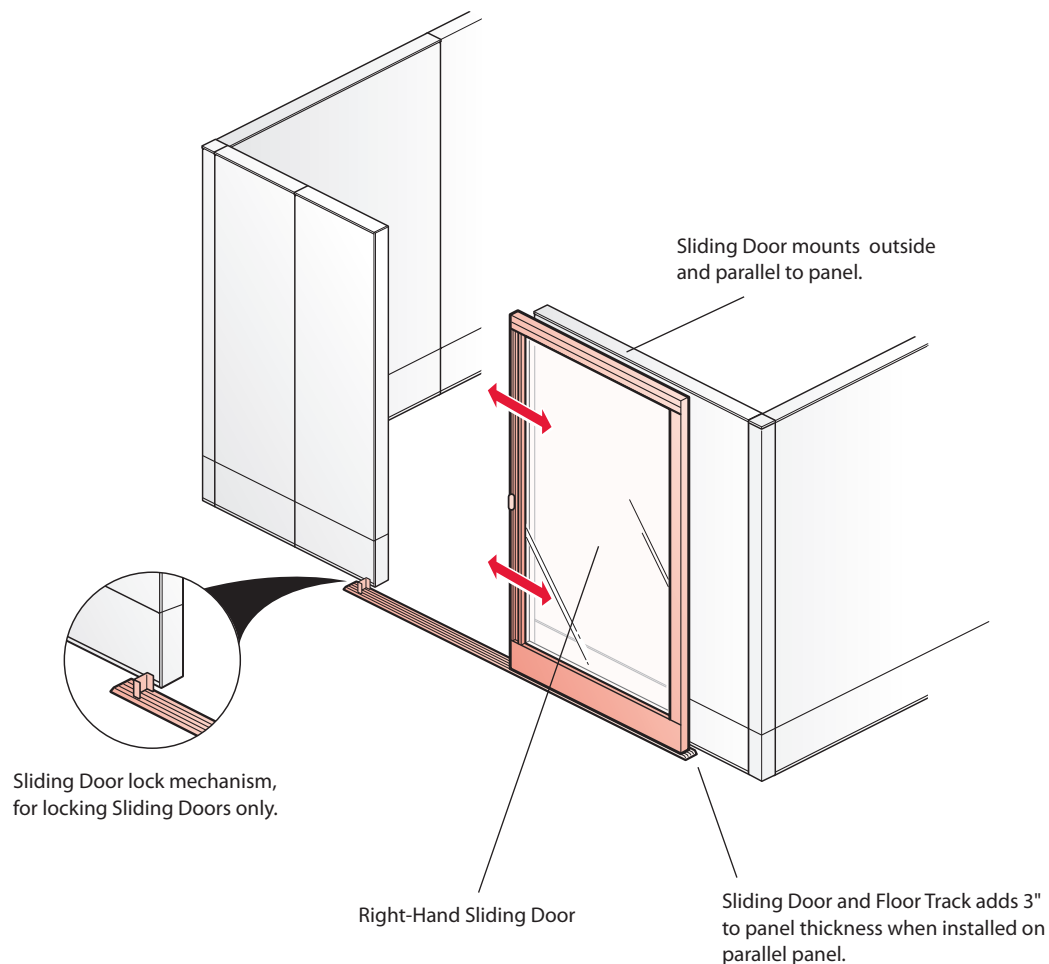

Sliding Door: Planning with Structures


A Sliding Door must be specified as right-hand or left-hand. To understand the difference, refer to the illustrations below.

Right-Hand Sliding Door

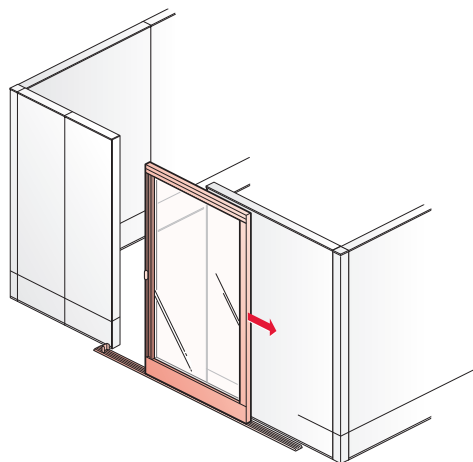

Right-hand Sliding Door mounts and slides open to the right (shown from the outside of a workstation application).


Left-Hand Sliding Door

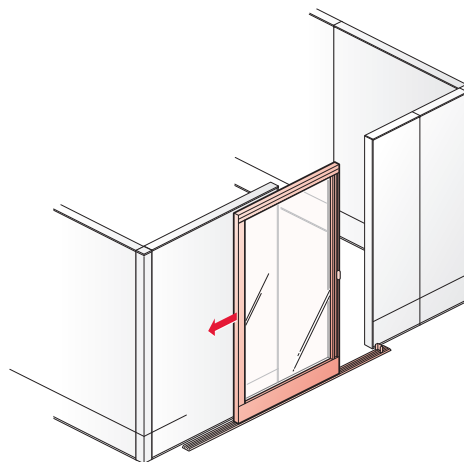

Left-hand Sliding Door mounts and slides open to the left (shown from the outside of a workstation application).




Right-hand and left-hand Sliding Doors are not field changeable to opposite sliding direction.

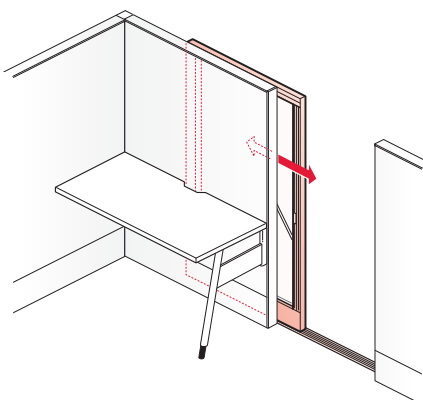


Sliding Door Attachment Brackets do not interfere with components mounted to opposite side of panel.

Sliding Door: Planning with Structures

Critical Dimensions in Sliding Door Applications (right-hand Sliding Door shown)

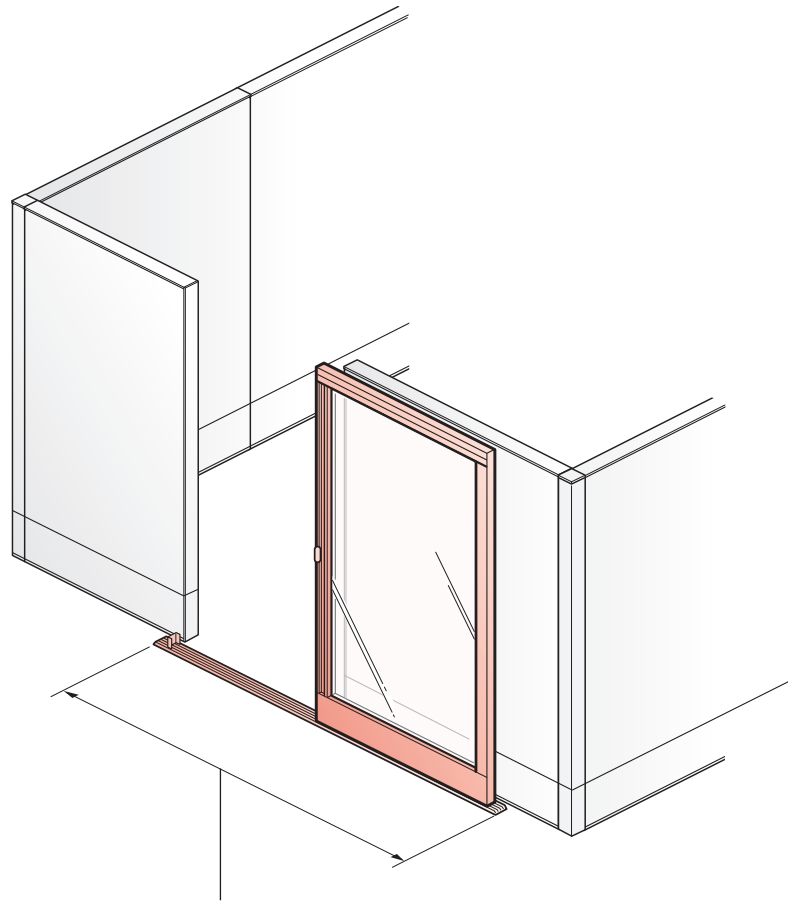

Sliding Door Threshold Track length:
36" wide Sliding Door = 71 $\frac{1}{4}$ " track
42" wide Sliding Door = 83 $\frac{1}{4}$ " track

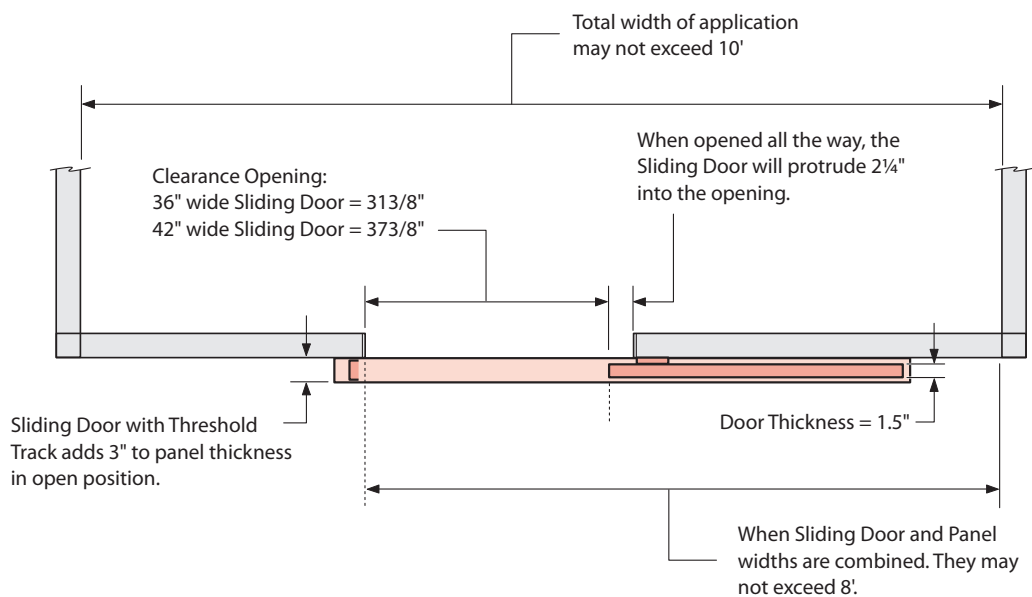


Sliding Door: Planning with Structures

Sliding Door Applications


Sliding Door can be specified in applications that have a parallel panel on both sides of the Sliding Door without the need of a Filler Post (as shown).

- Parallel panel run must be as wide or wider than the attached Sliding Door.
- Sliding Door must mount on a panel equal to or taller than the height of the Sliding Door.
- Parallel panel can be any PREMISE panel or glass panel.
- Sliding Door is product specific.


Panel Frame

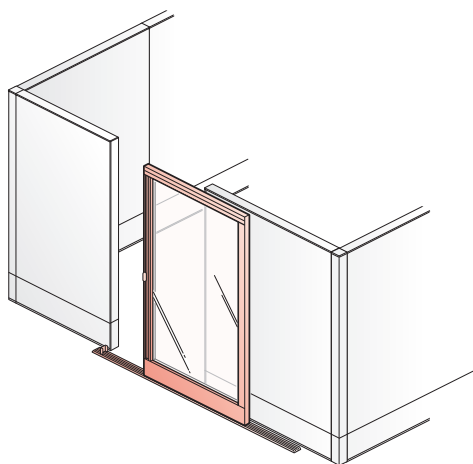


Panel Frame Taller than Sliding Door

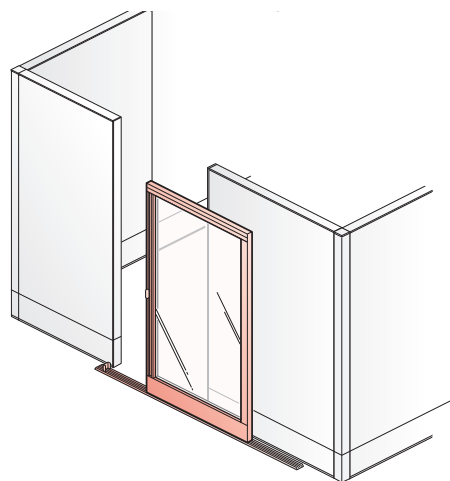

Panel Frame with Glass Stack Frame

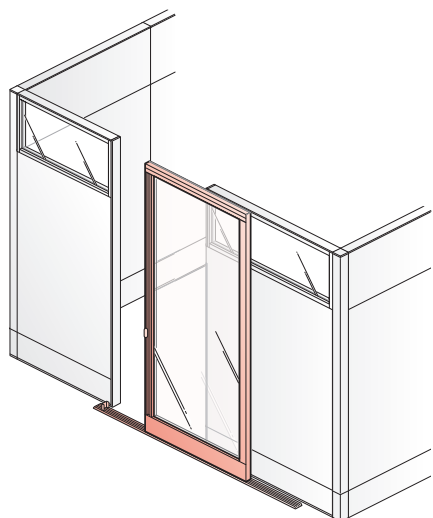



Panel Frame with Glass Stack Frame
Taller than Sliding Door

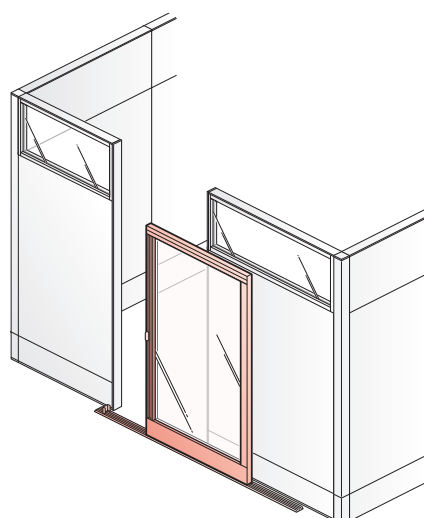

Sliding Door: Planning with Structures

Sliding Door Filler Post Applications

- Sliding Door can be used in applications where the Sliding Door meets with an end-of-panel run, the use of a separately specified Filler Post is required.
- Filler Posts are available in 64" and 80" heights.

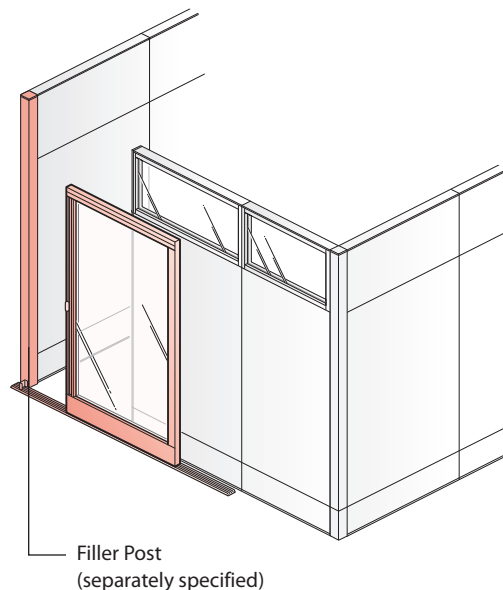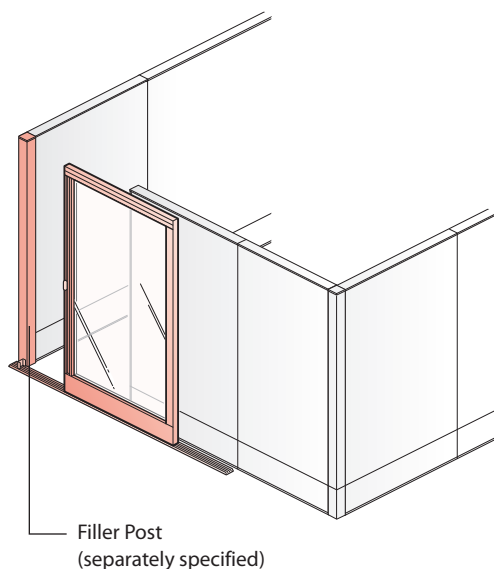


Tip

- Specify Filler Post to match panel height in all applications.
- Sliding door and panel combined width may not exceed 8'.

Notes



- Sliding door can match panel height or glass stack height.
- Two Sliding Doors cannot come together at an end-of-run application. Interference between the Sliding Door Floor Track Threshold will occur.

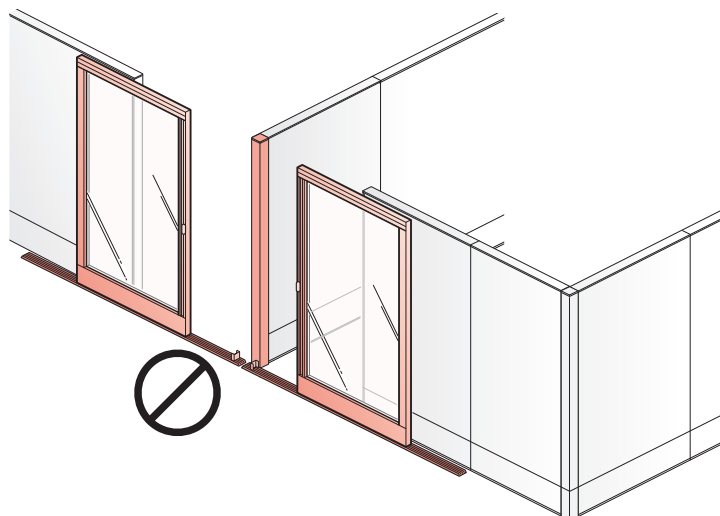

Sliding Door: Planning with Structures

Sliding Door Panel Applications



- Sliding Doors can be installed in application shown where a 3-way intersection or T-Mount condition occurs.

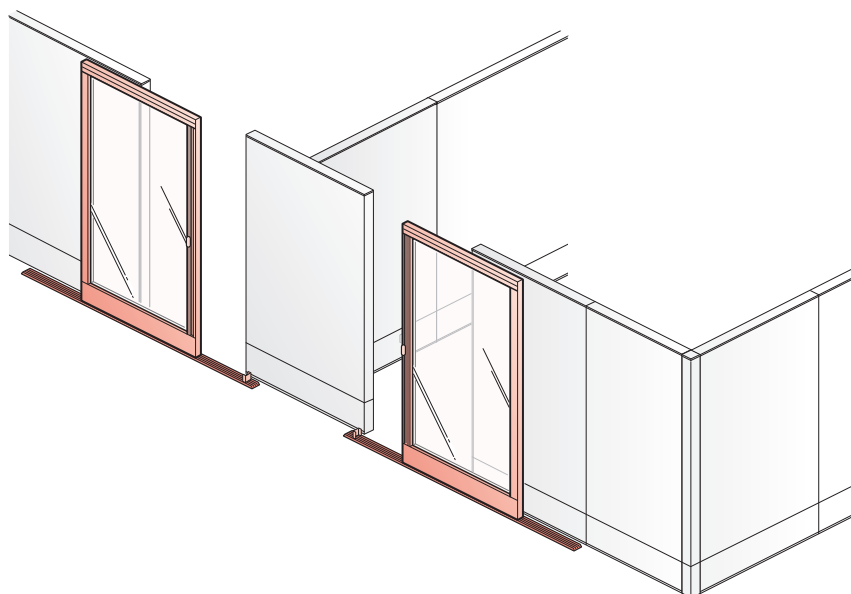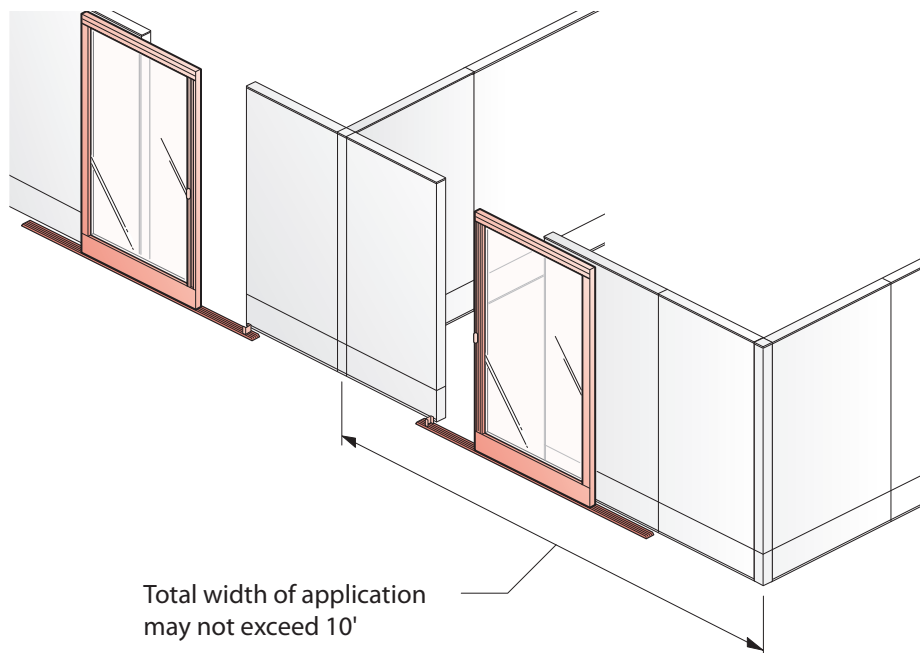


Sliding Door: Planning with Structures

Sliding Door Non-Specifiable Applications

- Sliding Door cannot be used in applications where the Sliding Door closes into a worksurface as the worksurface will interfere.
- A Sliding Door cannot end at a perpendicular panel run. The Sliding Door Threshold Track and lock mechanism will protrude into the pathway of the Sliding Door.

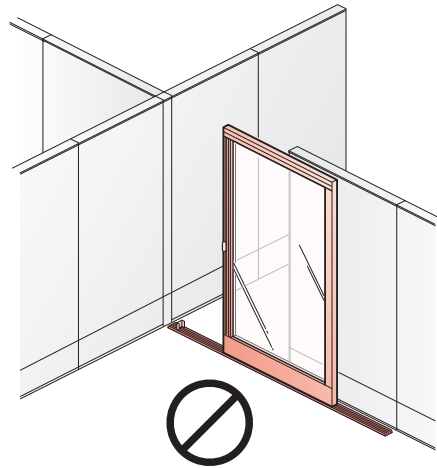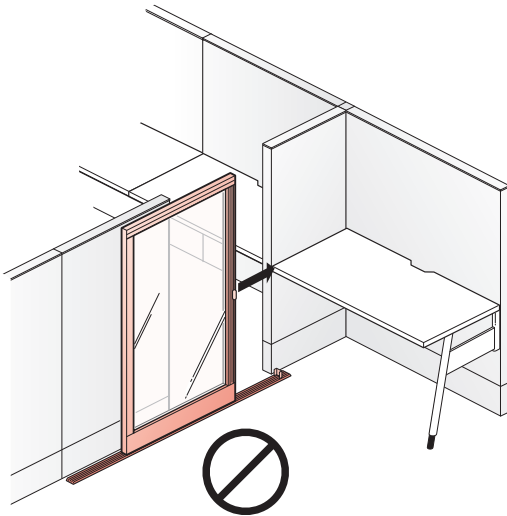


- Attaching a Sliding Door to a full glass panel run is not recommended.

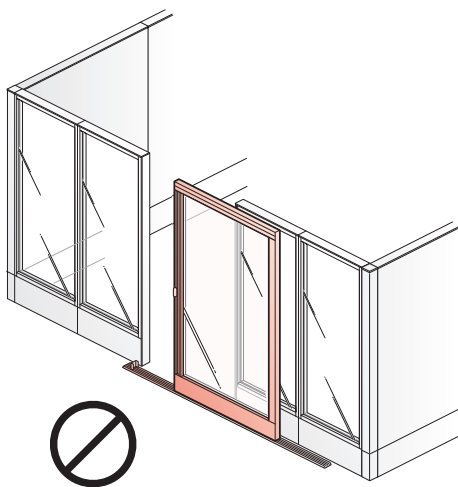


Sliding Door: Planning with Structures

Sliding Door Non-Specifiable Applications


- Two Sliding Doors cannot meet one another. Interference between the Sliding Door Threshold Track will occur.

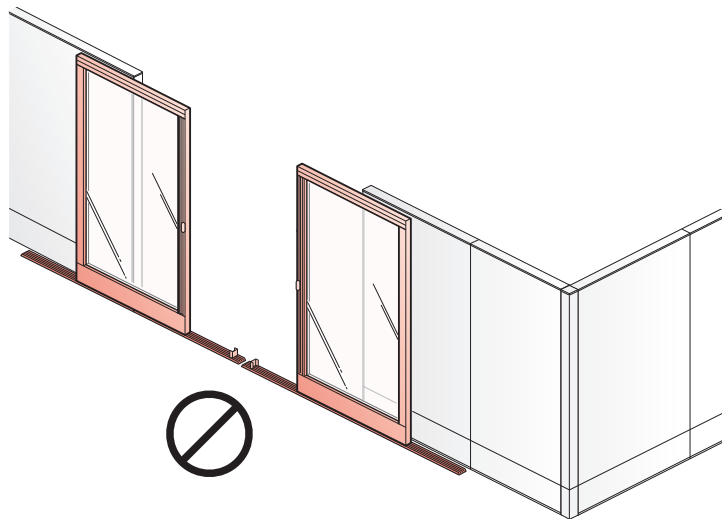

- A Sliding Door cannot end at a wall. Interference between the Sliding Door, Threshold Track, and the wall will occur.

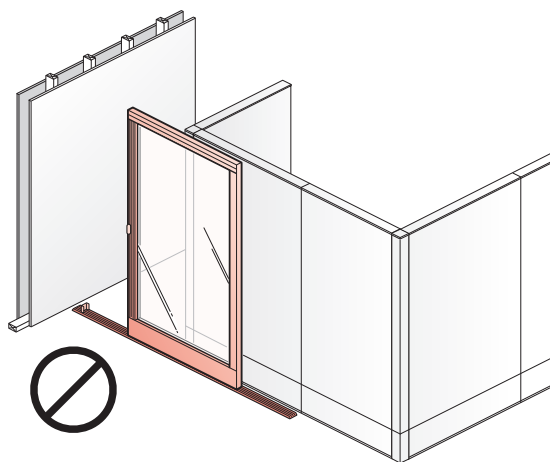

Single Door and Frame Assembly

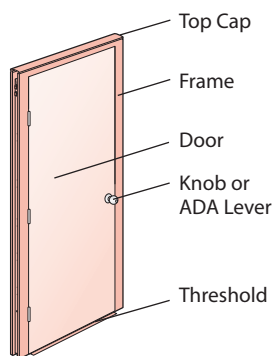


Single Door and Frame Assembly


The PREMISE single door and frame assembly includes an extruded aluminum frame, hollow core door and threshold. A top cap is used to trim the top of the panel and provide design consistency with the rest of the system. Door frame assembly features an integrated top raceway for the routing of communications cabling.

Single Door and Frame Assembly Dimensions

HEIGHT:	FRAME WIDTHS:	CLEARANCE HEIGHT:	CLEARANCE WIDTHS:
80" (2032mm)	36" (914mm) 42" (1067mm)	78" (1981mm)	30" (762mm) 36" (914mm)



Knob



ADA Lever

Door Surface Options

- High-pressure laminates available in a variety of colors
- Wood veneer is available in variety of wood species

Frame Trim Color

- Available in standard trim colors at the base list price
- Threshold matches frame trim color

Door Hardware Options

- Knob in brushed chrome
- ADA lever in brushed chrome

Door Swing Options

- Specified with left- or right-hand swing orientation
- Door swing can be field modified to opposite hand orientation

Top Cap Options

- Standard Top Cap in painted steel
- Available in standard trim colors at the base list price
- Wood Veneer Top Cap is available in a variety of wood species
- Grooved Top Cap option is not available


Tips

- Most building codes for new construction require a minimum opening clearance of 32" (813mm) wide and some require 78" (1981mm) of clearance height. Consult local building code requirements for door height compliance.
- Painted steel top caps and base raceway covers may be specified with different trim colors.
- Door assemblies include all installation hardware.
- Stack kits or FTC pad sets can be attached to door assemblies up to a total height of 120" (3048mm).

Note

Metallic trim colors are available at an upcharge.

Super Base Panels



Super Base Panels

The Super Base Panel is a 32" (813mm)-high Foundation Element featuring removable pads that can be individually specified to address multiple budget and design requirements. In addition, power and communication cabling can be routed from the base raceway directly into Stack Kits (placed on top of a Super Base Panel) along the entire face of the panel core.

Super Base Panel Dimensions

HEIGHT:	WIDTHS:
32" (813mm)	18" (457mm)
	24" (610mm)
	30" (762mm)
	36" (914mm)
	42" (1067mm)
	48" (1219mm)
	60" (1524mm)

Surface Options

- Painted and perforated pads are available in standard trim colors at the base list price
- Fabric pads are available in multiple fabric grades for pricing flexibility
- Optional Customer's Own Material (COM) can be specified on fabric pads. Refer to COM information located in the back of the book for program details
- Mixed fabric grades can be specified for each side of the panel. The panel will be priced at the higher grade fabric
- Wood veneer pads are available as individual pads or as pads sets
- For a matched wood grain application when using wood veneer pads with upper structure specify the pre-configured matching wood pad sets. Must be used in conjunction with the Super Base without pads
- Wood veneer pads are available in a variety of wood species
- Translucent pads are available in solid or patterned surfaces in a multitude of colors

Top Cap Options

- Standard Top Cap in painted steel
- Grooved Top Cap in painted aluminum. For use with:
 - Visual Privacy Elements; panel attached Toppers and/or Canopies
 - Off-modular applications; off-modular Overhead Storage Units and Off-Modular Return Panels
- The standard and Grooved Top Cap are available in standard trim colors at the base list price
- Wood Veneer Top Cap is available in a variety of wood species

Tips

- See the Price List for details on how to specify available panel features.
- Super Base Panels have removable pads surfaces to allow easy pad replacement.
- A Super Base Panel may have different surface options on each side of the panel. See Price List for exceptions.
- Refer to Off-Modular applications section for additional information.

Notes

- Some building codes may restrict the use of panel heights greater than 69" (1753mm). Consult your local code authority to assure that furniture layout is compliant prior to installation.
- Metallic trim colors are available at an upcharge.

Super Base Panels

Base Raceway Cover Options

- The two-sided base raceway cover is a one-piece design
- A non-powered base raceway cover is continuous in appearance without any ports for power and communication
- A powered base raceway cover features two electrical ports per each side of the cover for receptacles access
- The cover is available in standard trim colors at the base list price

Power Options

- Panels are available non-powered with a base raceway cover or non-powered as an open base panel
- Panels are available as powered panels with a PDA, (power distribution assembly). This option is available with a standard base raceway cover or with a separately specified base raceway cover for specific power and communication port locations
- Powered panels available in 3- circuit or 4-Circuit Power Base systems for 120 volt, 60 Hz power sources. See Price List for specification and additional power information




- All powered panels are shipped with one Power Base power distribution assembly and 0.95 flexible connector for 3-Circuit and 4-Circuit.
- See Power and Cable Management section for details.

Note


Metallic trim colors are available at an upcharge.

Panel Complements


Wing Walls




Full-Height One-Piece



Full-Height Two-Piece




Lower Unit



Upper Unit

Wing Walls



Full-Height One-Piece Wing Wall

Wing Walls are used to divide space, create different levels of privacy, panel support, and may support worksurfaces. They attach perpendicular to an PREMISE Monolithic or Stackable Panel. The Wing Wall installs into Panel Connector slots just like a component, so no additional length will be added to the panel run. The Panel Connector may be Full-Height, Pre-Configured (Sectional), or Extended. Wing Walls can be installed in left-hand, right-hand, or center mount conditions.

Full-Height One-Piece Wing Wall

The PREMISE Full-Height One-Piece Wing Wall may be used instead of a Return Panel. Must be used with equal or greater height panel. Will support one side/end of an adjoining worksurface of equal or less depth. Upper structure components may not be directly mounted from Wing Walls.

Full-Height One-Piece Dimensions

HEIGHTS:	WIDTHS:
42" (1067mm)	24" (610mm)
48" (1219mm)	30" (762mm)
53" (1346mm)	36" (914mm)
64" (1626mm)	42" (1067mm)
	48" (1219mm)


Tips

- Full-Height One-Piece Wing Wall may be the same width or wider than the worksurface depth.
- Full-Height One-Piece Wing Wall is pre-drilled for worksurface L-brackets. Brackets are spaced 13" (330mm) apart. Will support one side/end of a worksurface up to 30" (762mm) width/depth. Separately specify worksurface support for the end of worksurface opposite to Wing Wall.
- May not be used between two adjacent panel mounted worksurfaces.
- May not share the same connector slots with adjacent components such as tackboards, markerboards, paper management mounting bar, etc.
- When used at an end of run condition, adjacent to an Overhead Storage Unit or shelf, the specified Wing Wall height may be equal to or less than the Panel Spine.
- No additional hardware is needed for left or right-hand conditions. For center mount application separately specify hardware.

Note

Worksurface widths greater than 30" (762mm) require field drilling of Wing Wall.

Full-Height Two-Piece Wing Wall



Two-Piece Wing Walls

The PREMISE Full-Height Two-Piece Wing Wall is made up of two pieces — a lower unit and an upper unit. May be used as an intermediate panel support instead of a Return Panel. Must be used with equal or greater height panel. Will support one side/end of up to two panel mounted adjacent worksurfaces. Upper structure components may not be directly mounted from Wing Walls.


Full-Height Two-Piece Dimensions

HEIGHTS:	WIDTHS:
42" (1067mm)	24" (610mm)
48" (1219mm)	30" (762mm)
53" (1346mm)	36" (914mm)
64" (1626mm)	42" (1067mm)
	48" (1219mm)

- Tips
- Full-Height Two-Piece Wing Wall must be the same width as the Wing Wall mounted worksurface width/depth.
 - Full-Height Two-Piece Wing Wall is pre-drilled for worksurface L-brackets. Front L-brackets are spaced 3" (76mm) from front edge of Wing Wall. Separately specify Worksurface Support Panel for the end of worksurface(s) opposite to Wing Wall.
 - May not share the same connector slots with adjacent components such as tackboards, markerboards, paper management mounting bar, etc.
 - Use Full-Height Two-Piece Wing Walls between two panel mounted worksurfaces
 - When used below two adjacent overheard storage units or shelves, the specified Wing Wall height must be lower than the Overhead Storage Unit.
 - Includes center mount hardware to install centerline of Panel Connector.

Note Worksurface widths less than the width of the Wing Wall will require field drilling of Wing Wall.

Upper Unit Wing Wall



Upper Unit Wing Wall

The Upper Unit Wing Wall mounts above an PREMISE worksurface. Will provide privacy above a single panel mounted worksurface or between two panel mounted adjacent worksurfaces. Upper structure components may not be directly mounted from Wing Walls.


Upper Unit Dimensions

HEIGHTS:	WIDTHS:
13" (330mm)	24" (610mm)
19" (483mm)	30" (762mm)
24" (610mm)	36" (914mm)
35" (889mm)	42" (1067mm)
	48" (1219mm)

Tips

- Upper Unit Wing Wall may be the same width or less than the panel mounted worksurface width/depth.
- May not share the same connector slots with adjacent components such as tackboards, markerboards, paper management mounting bar, etc.
- When used below two adjacent Overhead Storage Units or shelves the specified Wing Wall height must be lower than the Overhead Storage Unit.
- Includes center mount hardware to install centerline of Panel Connector.

Lower Unit Wing Wall

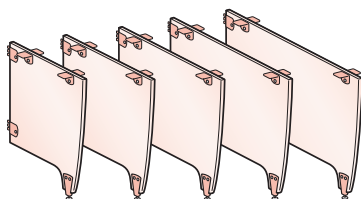

Lower Unit Wing Wall

The Lower Unit Wing Wall mounts below an PREMISE worksurface. May be used in place of a worksurface end panel. Will support one side/end of up to two panel mounted adjacent worksurfaces.

Upper Unit Dimensions

HEIGHT:	WIDTHS:
27¼" (692mm)	24" (610mm)
	30" (762mm)
	36" (914mm)
	42" (1067mm)
	48" (1219mm)

Tips


- Lower Unit Wing Wall must be the same width as the Wing Wall mounted worksurface width/depth.
- Lower Unit Wing Wall is pre-drilled for worksurface L-brackets. Front L-brackets are spaced 3" (76mm) from front edge of Wing Wall. Will support one side/end of same depth/width worksurface.
- Includes center mount hardware to install centerline of Panel Connector.
- Lower wing unit aligns with front edge of worksurface. Lower edge of worksurface will not align with Cascade edge of lower Wing Wall.

Note

Worksurface widths less than the width of the Wing Wall will require field drilling of Wing Wall.


Upper Structure Elements: Stack Kits

Stack kits are available in two heights; 10" and 16". Pad sets used in floor-to-ceiling applications are only available 24" high. Available surface materials are shown below. Some surface options are not available in all pad heights. Refer to the Price List for additional information.




Fabric

- Available in 3 fabric pad options:
 - Fabric/Tackable
 - Fabric/Acoustical/Tackable
 - Structural Fabric




Wood

- Wood veneer available in a variety of species




Perforated

- Non-metallic colors have textured surfaces
- Metallic colors have smooth surfaces




Painted

- Non-metallic colors have textured surfaces
- Metallic colors have smooth surfaces




Translucent

- Solid or patterned surface options




Glazed Double Pane

- Available in clear surface




Glazed Single Pane

- Available in clear or patterned surface




Open

- Without insert



Markerboard

- White surface for use with dry erase markers



Slat Pad

- For use with Belong and Jump Stuff Work Tools

Stack Kits, continued

Stack Kit with Standard Cross Bar and Floor-to-Ceiling Pad Sets Surface Options and Dimensions

SURFACE MATERIAL	PAD TYPE	HEIGHTS			WIDTHS				
		10"	16"	24"	30"	36"	42"	48"	60"
Fabric/Acoustical/Tackable	A	●	●		●	●	●	●	●
Fabric/Tackable	F	●	●		●	●	●	●	●
Structural Fabric	Z		●			●	●	●	●
Fabric Pad Set (FTC)	F			●	●	●	●	●	●
Slat Pad	Y	●	●		●	●	●	●	●
Perforated	H		●		●	●	●	●	●
Painted	P	●	●		●	●	●	●	●
Translucent	X	●	●		●	●	●	●	●
Single and Double Pane Glazed	S or G		●		●	●	●	●	●
Open Frame for Glazing	G			●	●	●	●	●	●
Open Frame	O		●		●	●	●	●	●
Markerboard*	M	●	●		●	●	●	●	●
Wood	W	●	●		●	●	●	●	●
Wood Pad Set	W			●	●	●	●	●	●

*Markerboard also available 32" (813mm)-high to span two 16" (406mm)-high stack levels.

Designing with Slat Pads


10" High Slat Pad

- The 10" High Slat Pad is not designed to support Overhead Storage Units or Shelves in standard or up-mount applications due to bracket limitations of the Slat Pad.
- In most applications the panel attached Wing Wall should not be used with the 10" high Slat Pad due to attachment limitations.
- Unlike other pad types the cable capacity of the 10" high Slat Pad is reduced because of the pad attachment brackets.
- Due to limited cable capacity, cable guides may not be used with pad type thus resulting in visible cables between pads.

10" and 16" High Slat Pad


- The Slat Pad is designed for use with Belong and Jump Stuff Slat Pad tools. It is not designed for use with other panel mounted components. The slat pad attachment brackets prohibit the use of panel attached components (i.e.: panel mounted tack strip, panel mounted Belong and Jump Stuff accessory rails, and paper management mounting bar).

10" and 16" High Stack Kit with Standard Cross Bar



Stack kits include two pads with attachment brackets and a cross bar. Stack kits are available with same surface or mixed surface pad sets.

- Mixed surface pad sets have different pad types on each side of the stack kit
- Same surface Stack Kits have the same pad type on each side of the stack kit
- The translucent and perforated pad surface are only available as same surface Stack Kits due to their semi-transparent aesthetic properties
- 16" high perforated pads are offered as same surface Stack Kits

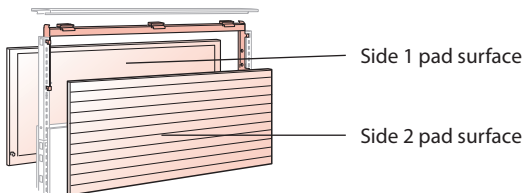

Side 1 pad surface
or
Side 2 pad surface

Pad Sets

SAME SURFACE PAD SETS	
PAD SURFACE	
Fabric/Acoustical/Tackable	
Fabric/Tackable	
Structural Fabric*	
Slat	
Perforated*	
Painted	
Translucent	
Markerboard	

MIXED SURFACE PAD SETS	
SIDE 1 PAD SURFACE	SIDE 2 PAD SURFACE
Fabric/Acoustical/Tackable	Painted
Fabric/Acoustical/Tackable	Fabric/Tackable
Fabric/Acoustical/Tackable	Wood
Fabric/Acoustical/Tackable	Markerboard
Fabric/Tackable	Painted
Fabric/Tackable	Wood
Fabric/Tackable	Slat
Fabric/Tackable	Markerboard
Markerboard	Slat

*16" high stack pads only.


Tips

- For aesthetic reasons it is not recommended to route cables behind translucent or perforated stack pads.
- For beltline or standing height 10" high stack power access specify the PREMISE Single Technology Pad Fabric: NTF - 10 _ _ - EC. Separately specify the appropriate power kit and receptacles.
- For beltline or standing height 16" high stack power access specify the PREMISE Single Technology Pad Fabric: NTF - 16 _ _ - EC or PREMISE Single Technology Pad Slat: NTY - 16 _ _ - EC. Separately specify the appropriate power kit and receptacles.

Note


On Modular upper storage units are not designed for use with 10" high slat pads.

16" High Stack Kit with Structural Cross Bar



Structural Stack Kits include two pads with attachment brackets and a structural cross bar for use in off-modular applications. Stack kits are available with same surface or mixed surface pad sets.

- Mixed surface pad sets have different pad types on each side of the stack kit
- Same surface Stack Kits have the same pad type on each side of the stack kit

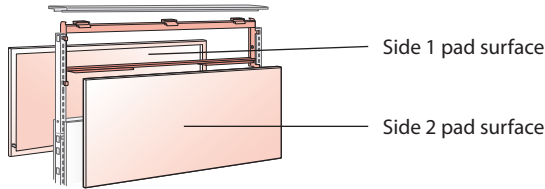

Side 1 pad surface
or
Side 2 pad surface


Pad Sets

SAME SURFACE PAD SETS


PAD SURFACE
Structural Fabric
Slat

MIXED SURFACE PAD SETS

SIDE 1 PAD SURFACE	SIDE 2 PAD SURFACE
Slat	Structural Fabric




Structural Cross Bar



Off-Modular Standard Mount Overhead Storage Unit

- Structural cross bar is located directly behind overhead storage unit.



Off-Modular Up-Mount Overhead Storage Unit

- Structural cross bar is located below overhead storage unit.


Tips

- For beltline or standing height 16" high stack power access specify the PREMISE Single Technology Pad Slat: NTY - 16 _ _ - EC. Separately specify the appropriate power kit, power connectors, and receptacles.
- See the Product Application; Power Management section for application details.

Note

Structural cross bars and correct pad surface (structural fabric or slat) are required to mount an off-modular Overhead Storage Unit from a Stackable Panel configuration.

Single Stack Pads

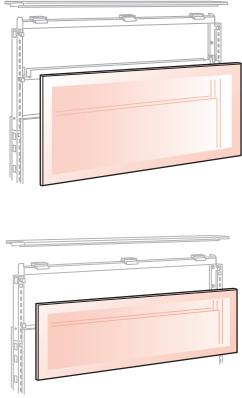

Stack pads are available in two heights, 10" and 16". They can be easily removed and replaced with an alternate surface material for panel reconfigurations.

Available surface materials are shown below. Some surface options are not available in both pad heights. Refer to the Price List for additional information.

Stack Components: 10" and 16" High Single Pad

Stack Pad: Surface Options and Dimensions


SURFACE MATERIAL	HEIGHT		WIDTH						
	10"	16"	18"	24"	30"	36"	42"	48"	60"
Fab/Acous/Tack	●	●	●	●	●	●	●	●	●
Fabric/Tackable	●	●	●	●	●	●	●	●	●
Structural Fabric		●		●	●	●	●	●	●
Fabric Pad Set (FTC)	●	●	●	●	●	●	●	●	●
Slat Pad	●	●		●	●	●	●	●	●
Perforated		●		●	●	●	●	●	●
Painted	●	●	●	●	●	●	●	●	●
Translucent	●	●		●	●	●	●	●	●
Single and Double Pane Glazed		●	●	●	●	●	●	●	●
Open Frame		●	●	●	●	●	●	●	●
Markerboard*	●	●	●	●	●	●	●	●	●
Wood	●	●	●	●	●	●	●	●	●

*Markerboard also available 32" (813mm)-high to span two 16" (406mm)-high stack levels.

Tips

- For aesthetic reasons it is not recommended to route cables behind translucent, scrim or perforated stack pads.
- For beltline or standing height 10" high stack power access specify the PREMISE Single Technology Pad Fabric: NTF - 10 __ - EC. Separately specify the appropriate power kit and receptacles.
- For beltline or standing height 16" high stack power access specify the PREMISE Single Technology Pad Fabric: NTF - 16 __ - EC or PREMISE Single Technology Pad Slat: NTY - 16 __ - EC. Separately specify the appropriate power kit and receptacles.
- When using perforated and translucent, it is recommended to use the same pad type on both sides of each stack level for aesthetic reasons.

Single Stack Pad with Power and Communication



3-Circuit and 4-Circuit power can be specified at beltline or standing height in a Stackable Panel configuration. This power option must be specified by using the PREMISE Single Technology Pad. In addition to specifying a single pad for each side of the stack level, power kits, power harness, receptacles, and power infeed must be separately specified as needed.


Available surface materials and pad sizes are shown below. Refer to the Price List for additional information.

Stack Components: Single Technology Pad with Power and Communication Ports

Single Technology Pad: Surface Options and Dimensions

PREMISE SURFACE MATERIAL	HEIGHT				WIDTH				
	10"	16"	18"	24"	30"	36"	42"	48"	60"
Fabric/Tackable	●	●			●	●	●	●	●
Slat Pad		●			●	●	●	●	●

- Tips**
- Power kits are available with a standard, structural cross bar, or no cross bar. Specify the appropriate cross bar per application requirements. Refer to the overhead storage section for additional details.



PREMISE Single Technology Pad with Power and Communication Ports
Includes four individual ports and bezels with the outer ports for power access and the inner ports for communication access.


Power port locations are always located the same relative distance from each end of the stack pad regardless of the pad width. The constant power port locations allow flex connectors to pass power in an in-line application to the directly adjacent ported pad. Additional power connectors may be required for other applications.

- Refer to the Product Application: Power Management section or Price List for additional details


- Tips**
- Separately specify Triplex receptacles as needed.
 - 3-Circuit or 4-Circuit power application.

Floor-to-Ceiling Pad Sets

PREMISE floor-to-ceiling (FTC) pad sets can be installed directly on top of a Monolithic Panel or panel configuration with 16" (406mm) Stack Kits to create a fully enclosed office or conference space up to a 10' (3048mm) ceiling height. Floor-to-ceiling components are comprised of ceiling track, connectors, trim covers, pads and open frames. All components are designed to be field modified to accommodate individual ceiling heights.

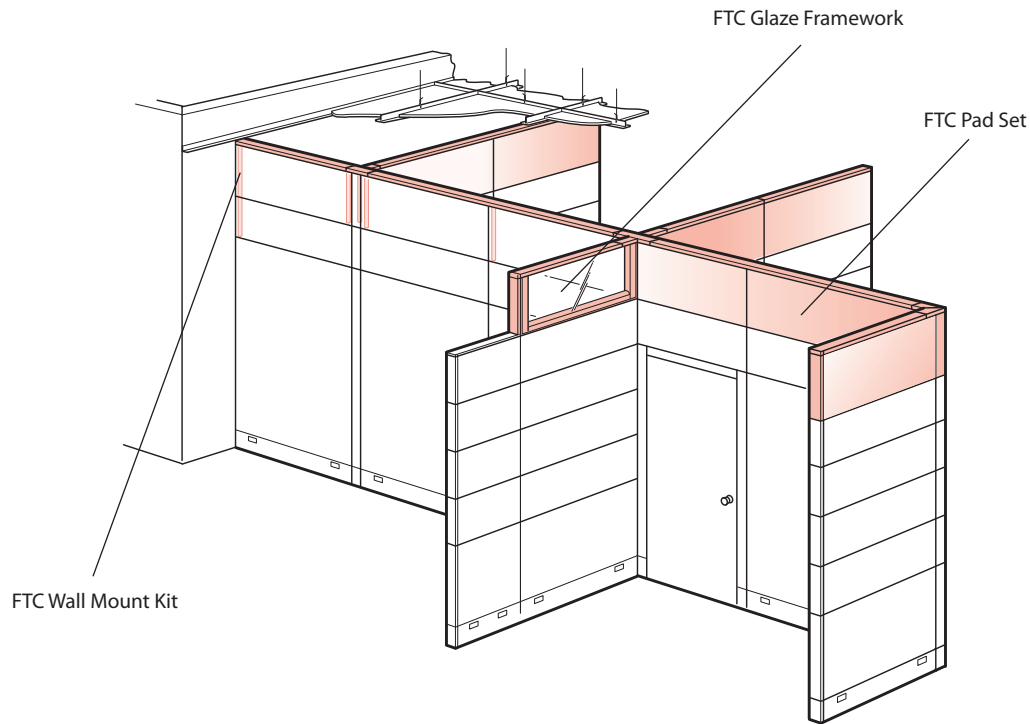

Floor-to-Ceiling Pad Sets

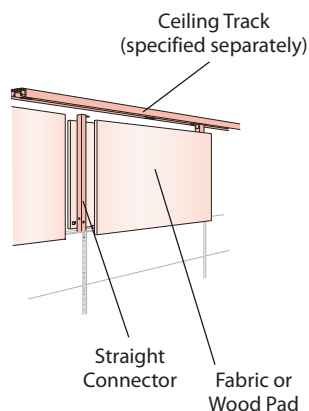


Floor-to-Ceiling Pad Set

FTC Pad Sets

- Comprised of two pads and attachment clips
- Available in a multitude of fabric grades for pricing flexibility
- Optional Customers Own Material (COM) can be specified. Refer to COM information located in back of the Price List for program details
- Wood veneer surface available in a variety of wood veneer finishes
- Pad width specified to correspond with the foundation (Monolithic or Upper Structure Elements) width
- Vertical height can be field cut to a minimum of 8" (203mm) to accommodate varying ceiling heights

Tips

- FTC pad sets cannot be used with 10" (254mm)-high Upper Structure Elements.
- Ceiling-mounted obstacles (i.e., sprinkler heads and light fixtures) may require you to adjust your product layout. Lighting and HVAC layouts should be evaluated given the physical barrier created by FTC components.
- FTC pad sets must be located at the top of a panel configuration. Ceiling track and connectors must be specified separately.
- FTC pad sets are used to create a physical barrier.



Floor-to-Ceiling Glaze Framework

FTC Glaze Framework

- Comprised of two outer frames and ceiling track insert
- Standard powder coat finish available in a variety of trim colors
- Provides the structure for customer-supplied glazing material (two pieces, 0.115" (2.92mm) – 0.130" (3.30mm)-thick) to be attached on each side
- Frame width specified to correspond with the foundation (Monolithic or Upper Structure Elements) width
- Vertical height can be field cut to a minimum of 8" (203mm) to accommodate varying ceiling heights (note: approximately 2" (50.8mm) of open glass will remain)

Tips


- When specifying glazing material, be sure to follow local building codes.
- Floor-to-ceiling elements are non-load bearing and will not support panel-hung components such as worksurfaces, storage units and shelves.
- Not available in single pane glass.

Note


Some building codes may restrict the use of panel heights greater than 69" (1753mm). Consult your local code authority to assure that the furniture layout is compliant prior to installation.

Visual Privacy Elements


Toppers




Fabric Scrim: Stand Alone Kit



Translucent: Stand Alone Kit




Fabric Scrim: Shared Kit




Translucent: Shared Kit


Banners




Fabric Scrim Insert: Desk Height



Translucent Insert: Desk Height




Fabric Scrim: Floor Height




Translucent: Floor Height


Canopies




Canopy: Top Cap Mount



Double Canopy:
Double Top Cap Mount




Canopy: Topper Mount




Canopy: Worktop Mounted


Worktop Mounted Screens: Without Modesty



Fabric Scrim: Stand Alone Kit




Translucent: Stand Alone Kit




Markerboard: Stand Alone Kit


Worktop Mounted Screens: With Modesty



Fabric Scrim: Stand Alone Kit




Translucent: Stand Alone Kit




Markerboard: Stand Alone Kit

Visual Privacy Elements


Freestanding Screens



Fabric Scrim Insert




Translucent Insert




Markerboard Insert


Freestanding Mobile Screens




Markerboard/Perforated Metal Insert



Markerboard/Frosted Insert




Perforated Metal Insert




Frosted Insert

Panel Slider Door



Panel Attached Screens/
PREMISE Monolithic/Stack

Toppers



Toppers are designed to be mounted to the top of a panel configuration with a Grooved Top Cap. Refer to application section for details.

- Toppers are available as stand alone or as shared kits
- Available in fabric scrim or translucent materials
- White translucent available at base list price: pattern transluents available at an upcharge
- Metal rods available in standard trim colors at base list price: metallic trim colors are available at an upcharge

Topper Dimensions

HEIGHT:	WIDTHS:
16" (406mm)	24" (610mm)
	30" (762mm)
	36" (914mm)
	42" (1067mm)
	48" (1219mm)
	54" (1372mm)
	60" (1524mm)



Tips

- Toppers are non-load bearing.
- Toppers can only be mounted on a Grooved Top Cap.

Note

Refer to Designing with Visual Privacy Elements: Toppers.

Banners



Banners are designed to be used at end-of-run, 2-Way, and 3-Way outside 90°, and 2-Way outside 120° corner conditions. Installation at 3-Way and 120° corner condition requires dismantling Panel Connector assemblies.

- Banners cannot be used in an in-line Panel Connector condition
- Designed to be 16" above the panel
- Available in fabric scrim or translucent materials
- White translucent available at base list price: pattern transluents available at an upcharge
- Frame available in standard trim colors at base list price: metallic trim colors are available at an upcharge

Banner Dimensions

DESK HEIGHTS:	WIDTHS:	FLOOR HEIGHTS:	WIDTHS:
34" (864mm)	21" (533mm)	57" (1448mm)	15" (381mm)
39" (991mm)	27" (686mm)	62" (1575mm)	21" (533mm)
50" (1270mm)		73" (1854mm)	


Tip

Banners are non-load bearing.

Note

Refer to Designing with Visual Privacy Elements: Toppers

Canopies

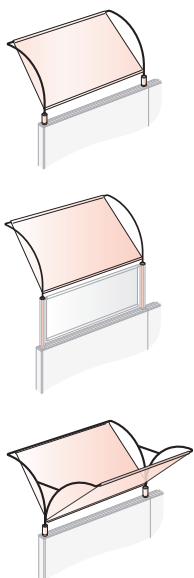

Canopies are designed to be mounted to the top of a panel configuration with a Grooved Top Cap or Toppers. They can also be attached to a desk-mounted screen. Refer to application section for details.

- Canopies are available as single or double versions
- Available in fabric scrim only
- Frame available in standard trim colors at base list price: metallic trim colors are available at an upcharge


Canopy Dimensions

DESK HEIGHT:	WIDTHS:
23" (584mm)	36" (914mm)
	42" (1067mm)
	48" (1219mm)

Tip

Canopies are non-load bearing.

Worktop Mounted Screens

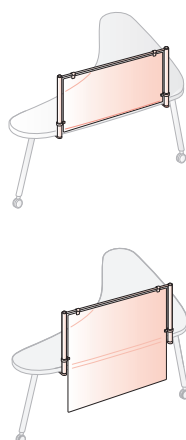

Worktop mounted Screens are available with or without modesties and mount directly to worksurfaces and tables to offer the user visual privacy. Refer to Price List and application section for details.

- Worktop mounted Screens can be mounted on 1³/₁₆" thick straight edge surfaces: may require field drilling
- Recommended stand alone screen width is 12" less than surface width
- Available in fabric scrim, translucent, or markerboard materials
- White translucent available at base list price: pattern transluents available at an upcharge
- Frame available in standard trim colors at base list price: metallic trim colors are available at an upcharge

Worktop Mounted Screen Dimensions

Stand Alone without Modesty

SCREEN HEIGHT:	WIDTHS:
19" (483mm)	24" (610mm)
	30" (762mm)
	36" (914mm)
	42" (1067mm)
	48" (1219mm)
	54" (1372mm)
	60" (1524mm)


Stand Alone with Modesty

SCREEN HEIGHT:	WIDTHS:
35" (889mm)	24" (610mm)
	30" (762mm)
	36" (914mm)
	42" (1067mm)
	48" (1219mm)
	54" (1372mm)
	60" (1524mm)

Tip

Screens are non-load bearing.

Freestanding Screens

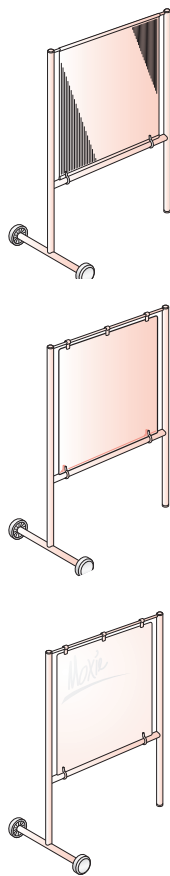

Freestanding Screens are designed to be used as a space divider and privacy element.


- Available in fabric scrim, translucent, or markerboard materials
- White translucent available at base list price: pattern transluents available at an upcharge
- Frame available in standard trim colors at base list price: metallic trim colors are available at an upcharge
- 173/8" clearance height below screen to finish floor
- 53" high Screens have a 20" wide wheel span centered on a 1¼" horizontal tube
- 64" high Screens have a 24" wide wheel span centered on a 1¼" horizontal tube

Stand Alone with Modesty

SCREEN HEIGHTS:	WIDTHS:
53" (1346mm)	36" (914mm)
64" (1626mm)	48" (1219mm)

Tip Screens are non-load bearing.

Panel Attached Screens

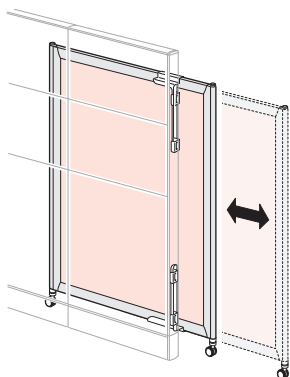

The panel-attached screen is a lightweight sliding partition that provides territorial privacy and visual space division.

- Screens are available with frosted, or perforated metal inserts
- Screens have no acoustical or tackable properties
- Screens mount parallel with panel, at panel end or at a 2-Way connection
- Screen adds 2" (51mm) to panel width in stored position
- Screens must mount on a panel taller than the height of the screen
- Screen can mount on any width panel, but panel run must be at least 48" (1219mm)
- Screen extends 41" (1041mm) beyond end of panel and 39" (991mm) from end of 2-Way connection when fully extended
- Two non-locking casters on post legs

Tip

Screens are non-load bearing.


Note

Screen extends 41" (1041mm) from end of panel when fully extended



Note

Panel attached screen brackets do not interfere with a Return Panel. Screen extends 39" (991mm) from end of panel when fully extended.




Panel Attached Screen Dimensions

HEIGHTS:	WIDTH:
47" (1194mm)	48" (1219mm)
52" (1321mm)	
63" (1600mm)	

Notes

- Frame available in standard trim colors at base list price.
- Metallic trim colors are available at an upcharge.

Freestanding Screens

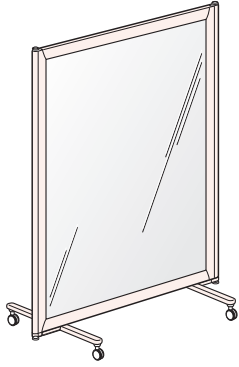

The freestanding Screens provide moveable visual privacy throughout the workspace.

- Screens are available with frosted, or perforated metal inserts, or ordered with insert combinations of markerboard/fabric, markerboard/frosted, and markerboard/perforated metal
- Same height Screens can be ganged together with rubber "O" rings (one ring included with each screen)
- An unlimited number of Screens may be ganged together, and can be ganged post leg to post leg, T-Leg to T-Leg, or post leg to T-Leg
- Four 2" casters: one locking and one non-locking caster on each of two T-Legs



Freestanding Screen Dimensions

SCREEN HEIGHTS:

47" (1194mm)
52" (1321mm)
63" (1600mm)

AVAILABLE WIDTHS:

36" (914mm)
48" (1219mm)

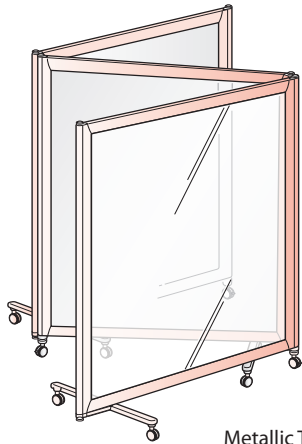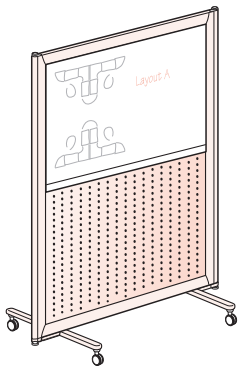

Metallic Trim Color
on T-Leg and Post Leg



Screens are non-load bearing.

Notes


- Frame available in standard trim colors at base list price.

Panel Connectors and Trim Covers: Overview


Panel Connectors are used to connect panel configurations together in straight, 2-Way, 3-Way, 4-Way, and End-of-Run panel conditions. Connectors and covers are available in a multitude of functional and aesthetic options ranging from full-height, pre-configured (sectional) or Extended Connectors to meet your application needs. All connector types work in a 90° application. For 120° applications use full-height, 2-Way, or 3-Way connectors.

Panel Connectors may be used with closed base raceway, open base, or with a mixed base panel application. Each condition requires altering the catalog number to reflect the application. Refer to the Product Application section or the Price List for specification details.


2-Way 90°, Panel Condition



Panel Connector for Base Raceway Panel Application




Panel Connector for Open Base Panel Application




Panel Connector for a Mixed Raceway Application: Base Raceway (Closed) and Open Base Panels


Panel Connectors may be used with Standard, Grooved, or Wood Top Cap Panels. They may also be used with a mixed top cap application. Each condition requires altering the catalog number to reflect the application. Refer to the Product Application section or the Price List for specification details.



Panel Connector for Standard Top Cap Panel Application




Panel Connector for Grooved Top Cap Panel Application



Panel Connector for Mixed Top Cap Panel Application, Standard and Grooved Top Cap Panels


All painted connector top caps, grooved, or standard, will have a smooth surface.

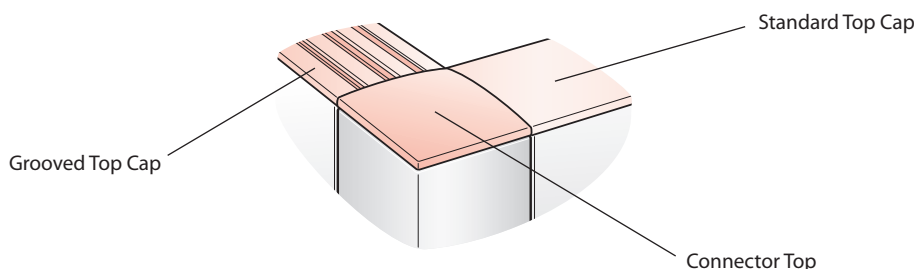

Panel Connectors and Trim Covers



Straight Full-Height Connector




2-Way 90° Full-Height Connector and Full-Height Cover




3-Way 90° Full-Height Connector and Full-Height Cover




4-Way 90° Full-Height Connector



End-of-Run Full-Height Connector and Full-Height Cover




2-Way Full-Height Connector and Pre-Configured Cover




3-Way Full-Height Connector and Pre-Configured Cover




End-of-Run Full-Height Connector and Pre-Configured Cover



Straight Pre-Configured Connector




2-Way 120° Full-Height Connector and Full-Height Cover




3-Way 120° Full-Height Connector and Full-Height Cover




Straight Extended Connector




2-Way 90° Extended Connector and Cover



3-Way 90° Extended Connector and Cover




4-Way 90° Extended Connector




End-of-Run Extended Connector and Cover




Straight Floor-to-Ceiling Connector



2-Way Floor-to-Ceiling Connector and Cover



3-Way Floor-to-Ceiling Connector and Cover



4-Way Floor-to-Ceiling Connector



End-of-Run Floor-to-Ceiling Connector and Cover

Note Panel Connectors may be used with closed base raceway (as shown above), open base, or with a mixed base panel application. Each condition requires altering the catalog number to reflect the application. Refer to the Product Application section or the Price List for specification details.


Panel Connectors and Trim Covers



T-Mount Kit



Off-Modular
T-Mount Kit




Wall Mount Kit




Floor-to-Ceiling
Wall Mount Kit




Ceiling Track




Full-Height
Variable-Height Cover



Sectional
Variable-Height Cover



Starter
Variable-Height Cover



Extended
Variable-Height Cover




Floor-to-Ceiling
Variable-Height Cover

Note Panel Connectors may be used with closed base raceway (as shown above), open base, or with a mixed base panel application. Trim covers may be used with standard, grooved, wood, or in a mixed panel top cap application. Each condition requires altering the catalog number to reflect the application. Refer to the Product Application section or the Price List for specification details.

Panel Connectors

The PREMISE system utilizes a series of separately specified connectors to attach panels in 90° and 120° applications. Panel Connectors (with the exception of the FTC connectors) provide concealed component mounting slots in 1" increments.

- Straight Connector
- 2-Way Connector, 90° and 120° condition
- 3-Way Connector, 90° and 120° condition
- 4-Way Connector, 90° condition
- End-of-Run Connector
- Wall-Mount Connector Kit
- T-Mount Kit
- Off-Modular T-Mount Kit

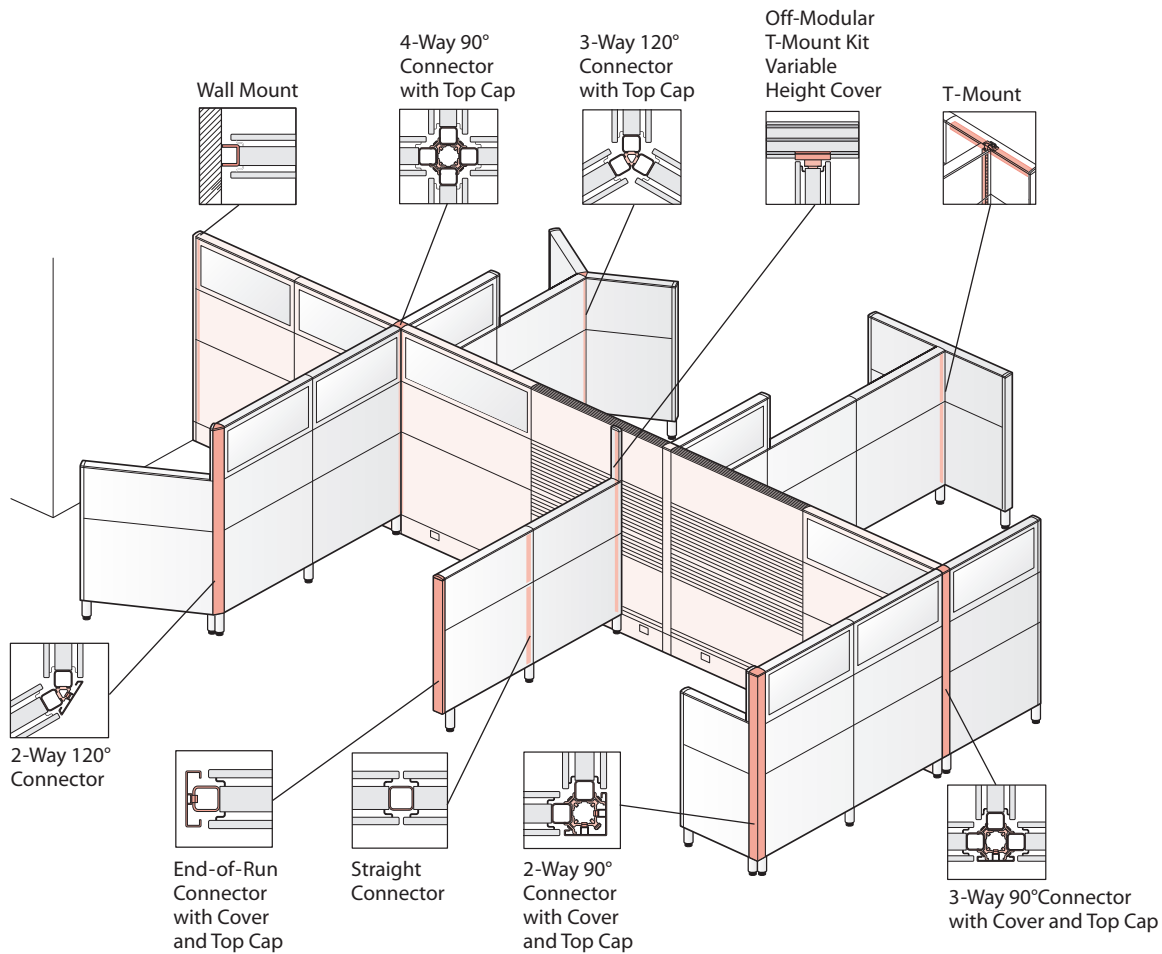

In addition, floor-to-ceiling connectors are available in straight, 2-Way, 3-Way, 4-Way, end-of-run, and wall-mount configurations.

Tips

- In most conditions, each connector (excluding wall-mount and T-Mount kits) is offered in full-height, pre-configured, extended and FTC versions.
- Full-Height Connectors are shipped assembled. The 32" (813mm)-high portion of Pre-Configured Connectors are also shipped assembled.
- Straight, 2-Way, 3-Way, and 4-Way 90° connectors can easily be converted to other connector conditions by adding or removing easily specified parts.
- Top caps and base covers may be specified with different trim colors.

Note

Panel Connectors may be used with closed base raceway, open base, or with a mixed base panel application. Panel Connectors may be used with Standard, Grooved, or Wood Top Cap Panels. They may also be used with a mixed top cap application. Each condition requires altering the catalog number to reflect the application. Refer to the Product Application section or the Price List for specification details.

Panel Connectors

Use the chart below to make your initial design decisions about Panel Connectors. When planning with connectors, you should consider:

- **Functionality:** reconfiguration frequency; full-height or Sectional Connectors
- **Aesthetics:** continuous vertical cover or sectional cover; painted or wood top cap, open or closed base raceway and surface materials

	HEIGHTS	SURFACE MATERIALS							
		PAINTED VERTICAL COVER	FABRIC VERTICAL COVER	WOOD VERTICAL COVER	NO VERTICAL COVER	PAINTED TOP CAP	WOOD TOP CAP	PAINTED BASE RACEWAY TRIM: CLOSED RACEWAY	PAINTED BASE RACEWAY TRIM: OPEN RACEWAY
90° Straight Full-Height Connector	32", 42", 48", 53", 58", 64", 80"				•				•
90° Straight Pre-Configured Connector	42", 48", 64", 80"				•				•
90° Straight Extended Connector	10", 16"				•				
90° 2-Way, 3-Way, End-of-Run Full-Height Connector Full-Height Cover	32", 42", 48", 53", 58", 64", 80"	•	•	•		•	•	•	•
90° 2-Way, 3-Way, End-of-Run Full-Height Connector Pre-Configured Cover	42", 48", 64", 80"	•	•	•		•	•	•	•
120° 2-Way Full-Height Connector Full-Height Cover	32", 42", 48", 53", 64", 80"	•	•			•		•	•
120° 3-Way Full-Height Connector Full-Height Cover	32", 42", 48", 53", 64", 80"				•	•			•
90° 2-Way, 3-Way, End-of-Run Extended Connector	10", 16"	•	•	•					
90° 4-Way Full-Height Connector	32", 42", 48", 53", 58", 64", 80"				•	•	•		•
90° 4-Way Extended Connector	10", 16"				•				
T-Mount Full-Height Connector	32", 42", 48", 53", 58", 64", 74", 80"				•				•
Off-Modular T-Mount Full-Height Connector	32", 42", 48", 58", 64"				•				•
Wall Mount Full-Height Connector	32", 42", 48", 53", 58", 64", 74", 80"				•				•

Notes


- 90°, 2-Way, 3-Way, and End-of-Run connectors are not available with wood vertical cover and standard painted top cap.
- The above matrix is not inclusive of floor-to-ceiling connectors.

Panel Connectors


The base raceway portion of an open base Panel Connector is a round two-piece telescoping sleeve. The upper sleeve requires a finish selection. The lower sleeve is standard in black. The base raceway portion of a closed base Panel Connector cover is rectilinear.

The graphic below depicts the location of the round open base connector covers and rectilinear closed base connector covers in various panel conditions. Mixed base raceway applications having open and closed raceways use both round and rectilinear covers. See the graphic below for details.


End-of-Run Connector

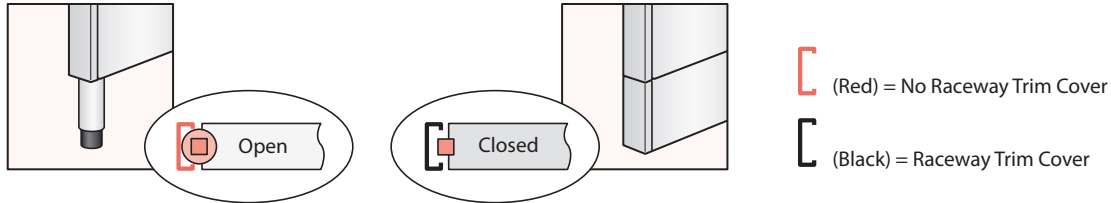


Straight Panel Connectors

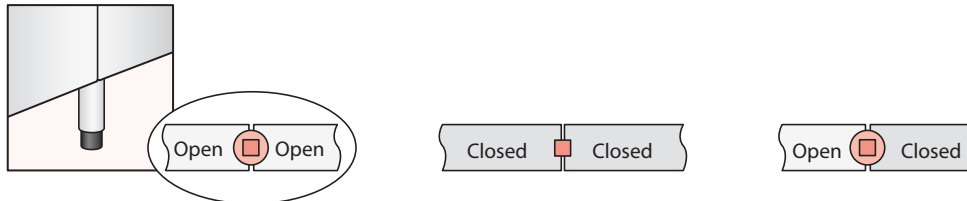

2-Way Panel Connectors

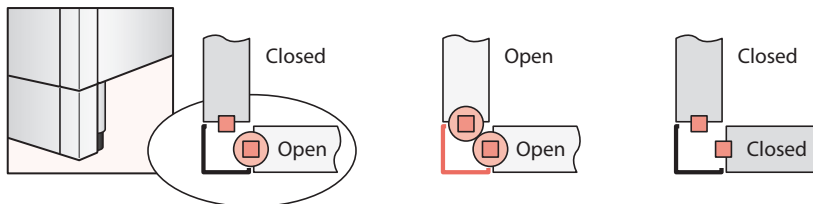


3-Way Panel Connectors

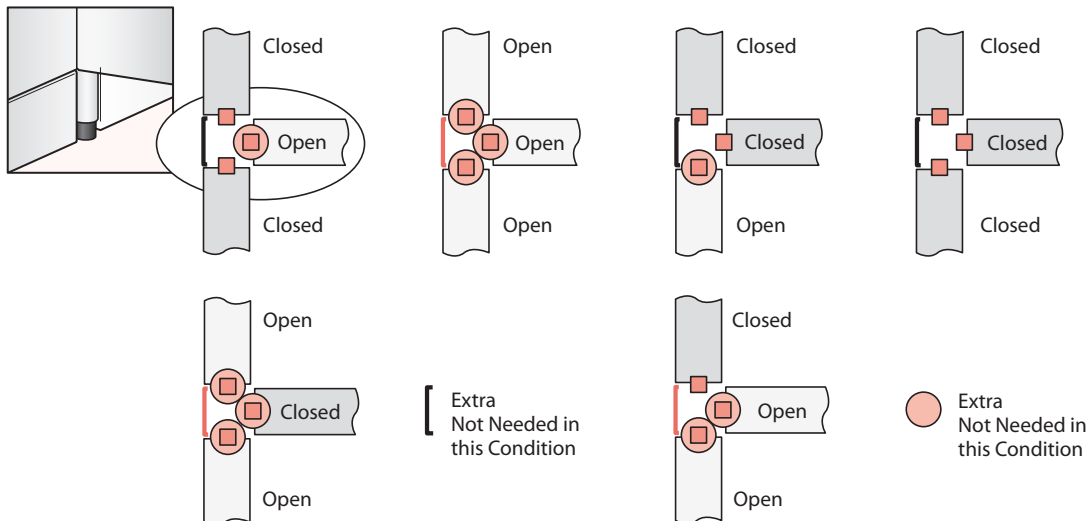


Panel Connectors


4-Way Connector

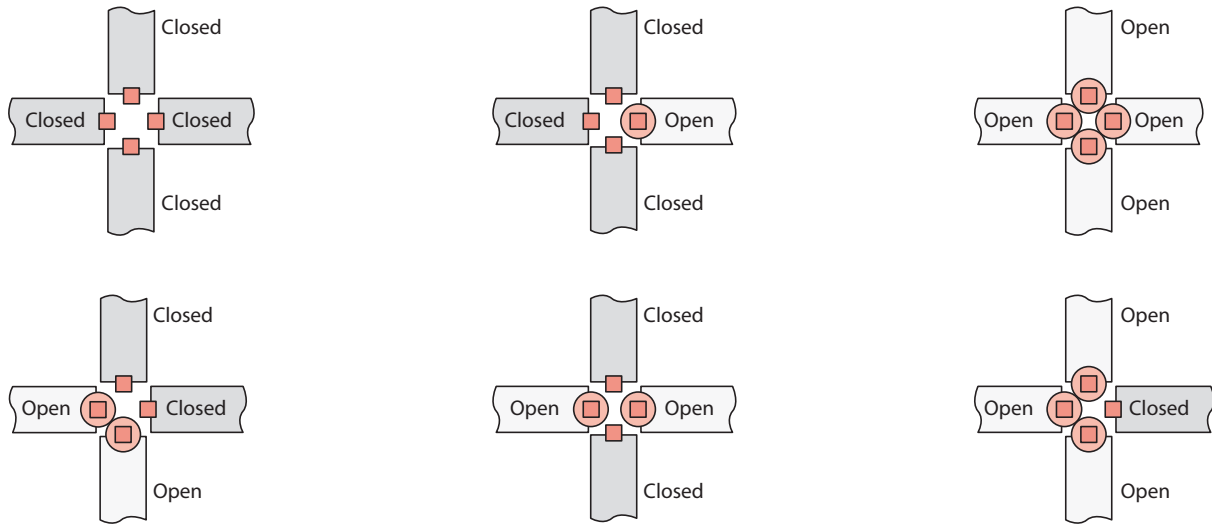

120° Connector

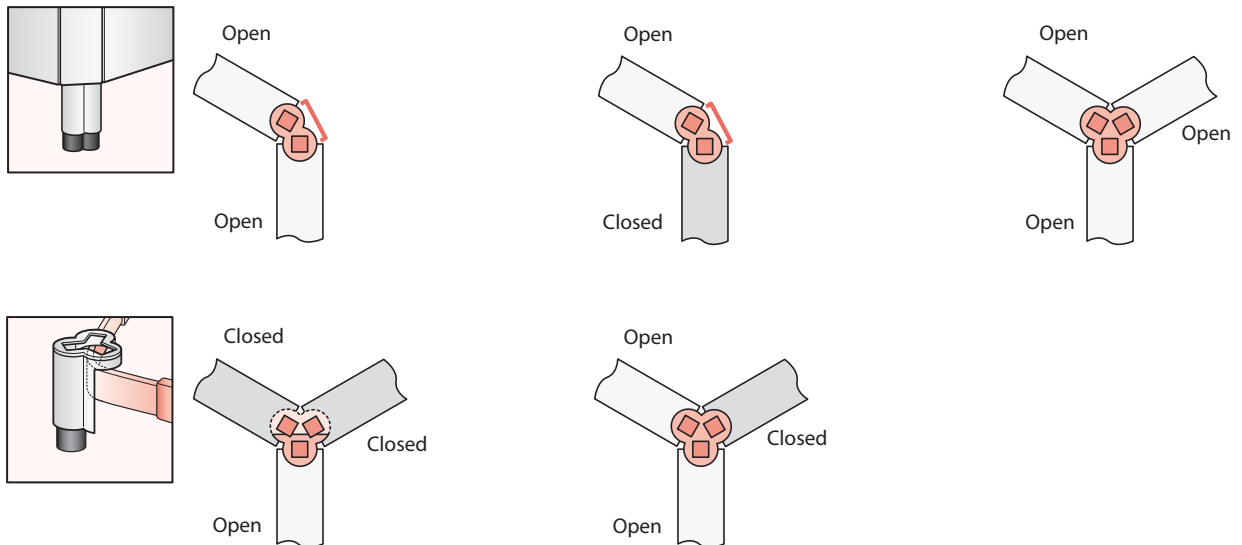

Panel Connectors




Straight Full-Height Connector

- Connects panel configurations in an in-line condition up to 80" (2032mm)-high
- Provides most cost-effective solution
- Includes one Full-Height Connector and Base Raceway Connector cover for open base raceway application, if applicable

HEIGHTS:

32" (813mm)
42" (1067mm)
48" (1219mm)
53" (1346mm)
58" (1473mm)
64" (1626mm)
80" (2032mm)

Straight Full-Height Connector will support:



Monolithic Panel



Monolithic Panel
and Upper
Structure Element



32" (813mm)-high Foundation Element
and Multiple 16" (406mm) Upper
Structure Elements (up to 80" high)




Tip

An off-modular Panel Spine must use full-height Panel Connectors.

Note

Panel Connectors may be used with closed base raceway (as shown above), open base, or with a mixed base panel application. Panel Connectors may be used with Standard, Grooved, or Wood Top Cap Panels. They may also be used with a mixed top cap application. Each condition requires altering the catalog number to reflect the application. Refer to the Product Application section or the Price List for specification details.

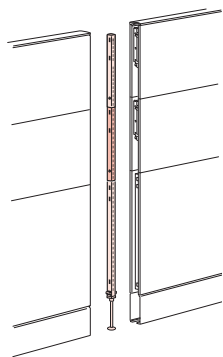

Straight Pre-Configured (Sectional) Connector

- Connects panel configurations in an in-line condition up to 80" (2032mm)-high
- Provides maximum reconfiguration flexibility
- Always includes a foundation connector height of 32" (813mm) and base raceway connector cover for open base raceway application, if applicable
- Includes appropriate number of 10" (254mm)-high and 16" (406mm)-high connectors to equal specified connector height
- Panel configurations must include 32" (813mm)-high Foundation Elements (Monolithic Panel or Super Base Panel) plus the appropriate-height upper structure elements

HEIGHTS:
42" (1067mm)
48" (1219mm)
64" (1626mm)
80" (2032mm)

Straight Pre-Configured Connector will support:

32" (813mm) Foundation Element and 10" (254mm) Upper Structure Element	32" (813mm) Foundation Element and 16" (406mm) Upper Structure Element	32" (813mm) Foundation Element and Two 16" (406mm) Upper Structure Elements	32" (813mm) Foundation Element and Three 16" (406mm) Upper Structure Elements




Pre-Configured Connectors cannot be used with 42"- 80" high Monolithic Panels, glazed panels and doors.



Panel Connectors may be used with closed base raceway (as shown above), open base, or with a mixed base panel application. Panel Connectors may be used with Standard, Grooved, or Wood Top Cap Panels. They may also be used with a mixed top cap application. Each condition requires altering the catalog number to reflect the application. Refer to the Product Application section or the Price List for specification details.

Panel Connectors




Straight Extended Connector

- Connects Upper Structure Elements in an in-line condition
- Used with straight Full-Height Connectors and straight Pre-Configured Connectors
- Includes 10" (254mm) or 16" (406mm) straight connector
- Necessary for configurations above 80" (2032mm)
- 10" (254mm) Extended Connectors can only be used at the top of a panel configuration
- 16" (406mm) Extended Connectors cannot be mounted above 10" (254mm) Extended Connectors

HEIGHTS:


10" (254mm)

16" (406mm)

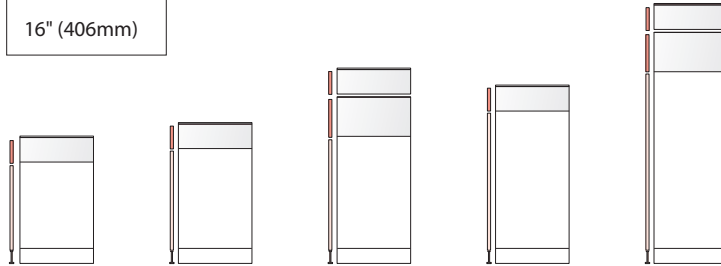

Tips

- For maximum flexibility in a vertical panel application, specify a 32" (813mm)-high Foundation Element with a 32" (813mm) high Full-Height Connector and Upper Structure Elements with corresponding height Extended Connectors.
- Extended Connectors must be used for panel configurations above 80" (2032mm) height.
- Extended Connectors cannot be used with a 42" (1067mm)-high pre-configured connector.
- Extended Connectors may not be used in an off-modular spine application.



Straight Floor-to-Ceiling Connector (FTC)

- Connects floor-to-ceiling pads and frames in an in-line condition
- Provides the supporting structure for the ceiling track
- Includes straight connector and L-brackets
- Vertical height can be field cut to a minimum of 8" (203mm) to accommodate varying ceiling heights
- FTC connectors cannot be mounted above 10" (254mm) Extended Connectors


HEIGHT:

24" (610mm)

Straight Floor-to-Ceiling Connectors



Panel Connectors and Trim Covers

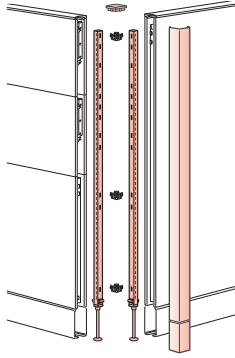

2-Way, 90° Full-Height Connector and Full-Height Cover


- Connects panel configurations in a 2-Way condition
- Includes two full-height straight connectors, corner connectors and one full-height cover with top cap and base raceway cover for open or close base raceway application
- Vertical cover and top cap available in standard trim colors at base list price
- Wood veneer vertical cover and top cap available in a variety of wood species
- Vertical cover available in a multitude of fabric grades at same base list price

HEIGHTS:

32" (813mm)
42" (1067mm)
48" (1219mm)
53" (1346mm)
58" (1473mm)
64" (1626mm)
80" (2032mm)

Tips

- Specify 32" (813mm) Full-Height Connector and cover with 32" (813mm)-high Super Base or Monolithic Panel plus extended connector(s) for a completely sectional application
- A Full-Height Connector must be as high as the tallest Foundation Element within the 2-Way condition

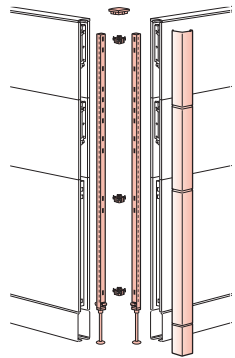

2-Way, 90° Full-Height Connector and Pre-Configured (Sectional) Cover

- Connects panel configurations in a 2-Way condition
- Includes two full-height straight connectors, corner connectors and one pre-configured cover with top cap and base raceway cover for open or closed base raceway application (pre-configured cover always has a foundation height of 32" (813mm) plus the appropriate number of 10" (254mm) or 16" (406mm) covers to equal overall connector height)
- Vertical cover and top cap available in standard trim colors at base list price
- Wood veneer vertical cover and top cap available in a variety of wood species
- Vertical cover available in a multitude of fabric grades at same base list price


HEIGHTS:

42" (1067mm)
48" (1219mm)
64" (1626mm)
80" (2032mm)

Notes

- Metallic trim colors available at an upcharge.
- Panel Connectors may be used with closed base raceway (as shown above), open base, or with a mixed base panel application. Panel Connectors may be used with Standard, Grooved, or Wood Top Cap Panels. They may also be used with a mixed top cap application. Each condition requires altering the catalog number to reflect the application. Refer to the Product Application section or the Price List for specification details.

Panel Connectors and Trim Covers



2-Way, 120° Full-Height Connector and Full-Height Cover


- Connects panel configurations in a 2-Way condition
- Includes two Full-Height Connectors, corner connectors and one full-height cover with top cap and base raceway cover for open or closed base raceway application
- Vertical cover and top cap available in standard trim colors at base list price
- Vertical cover available in a multitude of fabric grades at same base list price

HEIGHTS:
32" (813mm)
42" (1067mm)
48" (1219mm)
53" (1346mm)
64" (1626mm)
80" (2032mm)

Notes


- Metallic trim colors available at an upcharge.
- Panel Connectors may be used with closed base raceway (as shown above), open base, or with a mixed base panel application. Panel Connectors may be used with Standard, Grooved, or Wood Top Cap Panels. They may also be used with a mixed top cap application. Each condition requires altering the catalog number to reflect the application. Refer to the Product Application section or the Price List for specification details.

Panel Connectors and Trim Covers



2-Way, 90° Extended Connector and Cover

- Connects Upper Structure Elements in a 2-Way condition
- Includes two 10" (254mm) or 16" (406mm) straight connectors, corner connector and one cover
- Used in conjunction with 2-Way full-height or pre-configured connector
- does not include top cap (top cap from full-height or pre-configured 2-Way connector moves up to the top of the extended connector)
- Vertical cover available in standard trim colors at base list price
- Wood veneer vertical cover available in a variety of wood species
- Vertical cover available in a multitude of fabric grades at same base list price




HEIGHTS:

10" (254mm)

16" (406mm)

Tips

- Extended Connectors cannot be used with a 42" (1067mm)-high pre-configured connector.
- Extended Connectors must be used for panel configurations above 80" (2032mm) height.
- Extended Connectors cannot be used with 120° Full-Height Connectors.
- For maximum flexibility in a vertical panel application, specify a 32" (813mm)-high Foundation Element with a 32" (813mm)-high Full-Height Connector and Upper Structure Elements with corresponding height Extended Connectors.



2-Way, 90° Floor-to-Ceiling Connector


- Connects floor-to-ceiling pads and frames in a 2-Way condition
- Provides supporting structure for the ceiling track
- includes two straight connectors, corner connectors, L-brackets, cover and pre-assembled 2-Way ceiling track corner
- Pre-assembled ceiling track corner is available in a powder coat finish and a variety of trim colors
- Vertical height can be field cut to a minimum of 8" (203mm) to accommodate varying ceiling heights
- Vertical cover and ceiling track finish piece available in standard trim colors at base list price
- Wood veneer vertical cover available in a variety of wood species
- Vertical cover available in a multitude of fabric grades at same base list price

HEIGHT:

24" (610mm)

Note Metallic trim colors available at an upcharge.

Panel Connectors and Trim Covers

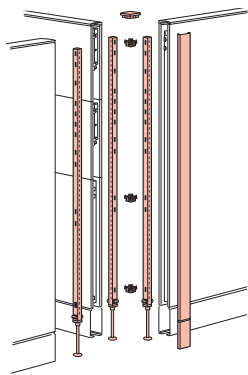


3-Way, 90° Full-Height Connector and Full-Height Cover

- Connects panel configurations in a 3-Way condition
- Includes three full-height straight connectors and one full-height cover with top cap and base raceway cover
- Vertical cover and top cap available in standard trim colors at base list price
- Wood veneer vertical cover and top cap available in a variety of wood species
- Vertical cover available in a multitude of fabric grades at same base list price

HEIGHTS:
32" (813mm)
42" (1067mm)
48" (1219mm)
53" (1346mm)
58" (1473mm)
64" (1626mm)
80" (2032mm)

Tips

- Specify 32" (813mm) Full-Height Connector and cover with 32" (813mm)-high Super Base or Monolithic Panel plus extended connector(s) for a completely sectional application.
- A Full-Height Connector must be as high as the tallest Foundation Element within the 3-Way condition.



3-Way, 90° Full-Height Connector and Pre-Configured (Sectional) Cover


- Connects panel configurations in a 3-Way condition
- Includes three full-height straight connectors and one pre-configured cover with top cap and base raceway cover (pre-configured cover always has a foundation height of 32" (813mm) plus the appropriate number of 10" (254mm) or 16" (406mm) covers to equal overall connector height)
- Vertical cover and top cap available in standard trim colors at base list price
- Wood veneer vertical cover and top cap available in a variety of wood species
- Vertical cover available in a multitude of fabric grades at same base list price

HEIGHTS:
42" (1067mm)
48" (1219mm)
64" (1626mm)
80" (2032mm)

Notes

- Metallic trim colors available at an upcharge.
- Panel Connectors may be used with closed base raceway (as shown above), open base, or with a mixed base panel application. Panel Connectors may be used with Standard, Grooved, or Wood Top Cap Panels. They may also be used in a mixed top cap application. Each condition requires altering the catalog number to reflect the application. Refer to the Product Application section or the Price List for specification details.

Panel Connectors and Trim Covers

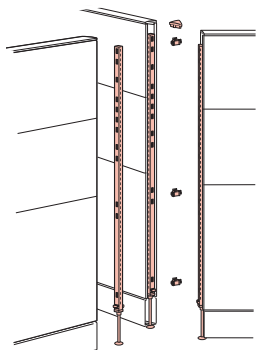


3-Way, 120° Full-Height Connector and Full-Height Cover

- Connects panel configurations in a 3-Way condition
- Includes three Full-Height Connectors and corner connectors with top cap and base raceway cover for open or closed base raceway application

HEIGHTS:
32" (813mm)
42" (1067mm)
48" (1219mm)
53" (1346mm)
64" (1626mm)
80" (2032mm)


- Notes**
- Metallic trim colors available at an upcharge.
 - Panel Connectors may be used with closed base raceway (as shown above), open base, or with a mixed base panel application. Panel Connectors may be used with Standard, Grooved, or Wood Top Cap Panels. They may also be used in a mixed top cap application. Each condition requires altering the catalog number to reflect the application. Refer to the Product Application section or the Price List for specification details.

Panel Connectors and Trim Covers



3-Way, 90° Extended Connector and Cover

- Connects Upper Structure Elements in a 3-Way condition
- Includes three 10" (254mm) or 16" (406mm) straight connectors and one cover
- Used in conjunction with 3-Way full-height or pre-configured connector
- Vertical cover available in standard trim colors at base list price
- Wood veneer vertical cover available in a variety of wood species
- Vertical cover available in a multitude of fabric grades at same base list price
- Does not include top cap (top cap from full-height or pre-configured 3-Way connector moves up to the top of the extended connector)




HEIGHTS:

10" (254mm)

16" (406mm)

Tip

- Extended Connectors cannot be used with a 42" (1067mm)-high pre-configured connector.
- Extended Connectors must be used for panel configurations above 80" (2032mm) height.
- Extended Connectors cannot be used with 120° Full-Height Connectors.
- For maximum flexibility in a vertical panel application, specify a 32" (813mm)-high Foundation Element with a 32" (813mm) high Full-Height Connector and Upper Structure Elements with corresponding height Extended Connectors.



3-Way, 90° Floor-to-Ceiling Connector

- Connects floor-to-ceiling pads and frames in a 3-Way condition
- Provides supporting structure for the ceiling track
- Includes two straight connectors, L-brackets, cover and pre-assembled 3-Way ceiling track corner
- Pre-assembled ceiling track corner is available in a powder coat finish and a variety of trim colors
- Vertical cover and ceiling track finish piece available in standard trim colors at base list price
- Wood veneer vertical cover available in a variety of wood species
- Vertical cover available in a multitude of fabric grades at same base list price
- Vertical height can be field cut to a minimum of 8" (203mm) to accommodate varying ceiling heights

HEIGHT:

24" (610mm)


Tip

Extended Connectors cannot be used with 120° connectors.

Note

Metallic trim colors available at an upcharge.

Panel Connectors and Trim Covers





4-Way, 90° Full-Height Connector

- Connects panel configurations in a 4-Way condition
- Includes four full-height straight connectors, corner connectors and one top cap and base raceway cover for open base raceway application if applicable
- Top cap and open base cover if applicable, available in standard trim colors at base list price
- Metallic trim colors available at an upcharge
- Wood Veneer Top Cap available in a variety of wood species

HEIGHTS:
32" (813mm)
42" (1067mm)
48" (1219mm)
53" (1346mm)
58" (1473mm)
64" (1626mm)
80" (2032mm)

Note Full-Height Panel Connectors may be used with closed base raceway (as shown above), open base, or with a mixed base panel application. Panel Connectors may be used with Standard, Grooved, or Wood Top Cap Panels. They may also be used in a mixed top cap application. Each condition requires altering the catalog number to reflect the application. Refer to the Product Application section or the Price List for specification details.

Panel Connectors and Trim Covers



4-Way, 90° Extended Connector

- Connects upper structure in a 4-Way intersection
- Used in conjunction with a 4-Way full-height or pre-configured connector
- Includes four straight connectors and corner connectors
- Does not include top cap (top cap from full-height or pre-configured 4-Way connector moves up to the top of the extended connector)


HEIGHTS:

10" (254mm)

16" (406mm)

Tips

- Extended Connectors cannot be used with a 42" (1067mm)-high pre-configured connector.
- Extended Connectors must be used for panel configurations above 80" (2032mm) height.
- Extended Connectors cannot be used with 120° Full-Height Connectors.
- For maximum flexibility in a vertical panel application, specify a 32" (813mm)-high Foundation Element with a 32" (813mm) high Full-Height Connector and Upper Structure Elements with corresponding height Extended Connectors.



4-Way Floor-to-Ceiling Connector

- Connects floor-to-ceiling pads and frames in a 4-Way intersection
- Provides supporting structure for the ceiling track
- Includes four straight connectors, L-brackets, cover and pre-assembled 4-Way ceiling track section
- Pre-assembled ceiling track corner is available in a powder coat finish and a variety of trim colors
- Vertical height can be field cut to a minimum of 8" (203mm) to accommodate varying ceiling heights
- 4-Way ceiling track section available in standard trim finish options

HEIGHT:

24" (610mm)


Tip

Extended Connectors cannot be used with 120° connectors.

Note

Metallic trim colors available at an upcharge.

Panel Connectors and Trim Covers

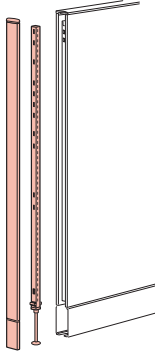

End-of-Run Full-Height Connector and Full-Height Cover


- Provides trim attachment in an end-of-run condition for a finished appearance
- Includes full-height straight connector and full-height cover with top cap and base raceway cover for open or closed base raceway application
- Vertical cover and top cap available in standard trim colors at base list price
- Wood veneer vertical cover and top cap available in a variety of wood species
- Vertical cover available in a multitude of fabric grades at same base list price

HEIGHTS:

32" (813mm)
42" (1067mm)
48" (1219mm)
53" (1346mm)
58" (1473mm)
64" (1626mm)
80" (2032mm)

Tips

- Specify 32" (813mm) Full-Height Connector and full-height cover with 32" (813mm)-high Super Base or Monolithic Panel plus extended connector(s) for a completely sectional application.
- A Full-Height Connector must be as high as the tallest Foundation Element within the end-of-run condition.

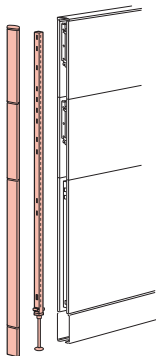

End-of-Run Full-Height Connector and Pre-Configured (Sectional) Cover

- Provides trim attachment in an end-of-run condition for a finished appearance
- Includes full-height straight connector and pre-configured cover with top cap and base raceway cover for open or closed base raceway application (pre-configured cover always has a foundation height of 32" (813mm) plus the appropriate number of 10" (254mm) or 16" (406mm) covers to equal overall connector height)
- Vertical cover and top cap available in standard trim colors at base list price
- Wood veneer vertical cover and top cap available in a variety of wood species
- Vertical cover available in a multitude of fabric grades at same base list price


HEIGHTS:

42" (1067mm)
48" (1219mm)
64" (1626mm)
80" (2032mm)

Notes

- Metallic trim colors available at an upcharge.
- Panel Connectors may be used with closed base raceway (as shown above), open base, or with a mixed base panel application. Panel Connectors may be used with Standard, Grooved, or Wood Top Cap Panels. They may also be used in a mixed top cap application. Each condition requires altering the catalog number to reflect the application. Refer to the Product Application section or the Price List for specification details.

Panel Connectors and Trim Covers

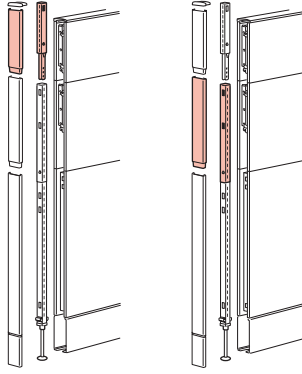

End-of-Run Extended Connector and Cover


- Provides trim attachment in an end-of-run condition for a finished appearance
- Used in conjunction with end-of-run full-height or pre-configured connector
- Includes 10" (254mm) or 16" (406mm) connector and cover
- Standard powder coat trim finish on cover available in a variety of colors
- Vertical cover available in standard trim colors at base list price
- Wood veneer vertical cover available in a variety of wood species
- Vertical cover available in a multitude of fabric grades at same base list price

HEIGHTS:

10" (254mm)
16" (406mm)

Tip

- Extended Connectors cannot be used with a 42" (1067mm)-high pre-configured connector.
- Extended Connectors must be used for panel configurations above 80" (2032mm) height.
- For maximum flexibility in a vertical panel application, specify a 32" (813mm)-high Foundation Element with a 32" (813mm) high Full-Height Connector and Upper Structure Elements with corresponding height Extended Connectors.




End-of-Run Floor-to-Ceiling Connector

- Provides trim attachment in an end-of-run condition for a finished appearance
- Provides supporting structure for the ceiling track
- Includes straight connector, L-bracket, V-clip, rubber bumper, vertical connector cover and ceiling track finish piece
- Vertical cover and ceiling track finish piece available in standard trim colors at base list price
- Wood veneer vertical available in a variety of wood species
- Vertical cover available in a multitude of fabric grades at same base list price
- Vertical height can be field cut to a minimum of 8" (203mm) to accommodate varying ceiling heights

HEIGHT:

24" (610mm)



Ceiling Track

- Provides a finished appearance at the ceiling
- Is supported by straight 2-Way, 3-Way, 4-Way, and End-of-Run Connectors
- Includes 10' (3048mm) track length, gasket, pad retaining clips (unassembled)
- Field cut to appropriate length

HEIGHT:

2" (51mm)

DEPTH:

3" (76mm)

LENGTH:

10' (3048mm)


Tip

The ceiling track is not secured to the ceiling material. This eliminates the need to locate building support structures.

Note

Metallic trim colors available at an upcharge.

Panel Connectors: Mount Kits

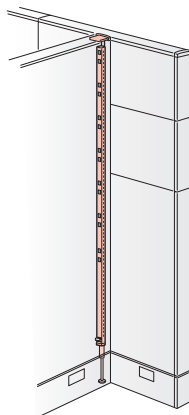


T-Mount Kit

- Connects two panel configurations of the same or different heights in a fixed "off-modular" condition: up to 80" (2032mm)
- Includes leveling glide, carpet gripper and top cap
- Standard in black finish only
- Provides 1" (25mm) incremental slots to mount panel-hung components
- Adds 5/16" to width of Return Panel

HEIGHTS:

32" (813mm)
42" (1067mm)
48" (1219mm)
53" (1346mm)
58" (1473mm)
64" (1626mm)
74" (1880mm)
80" (2032mm)

Note See Price List for additional details.

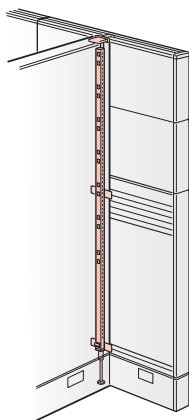

Off-Modular T-Mount

- Connects two panel configurations of the same or different heights in a true "off-modular" condition
- Includes leveling glide, carpet gripper, top cap, and base raceway connector cover for open base panel, if applicable
- Standard in black finish
- Provides 1" (25mm) incremental slots to mount panel-hung components
- Adds 5/16" to width of Return Panel


HEIGHTS:

32" (813mm)
42" (1067mm)
48" (1219mm)
58" (1473mm)
64" (1626mm)

Tip Off-Modular T-Mount attaches to the Grooved Top Cap of the Super Base Panel and to the upper and lower rail of the Off-Modular Super Base pad only.

Note See Off-Modular Application Guidelines section.

Panel Connectors: Mount Kits

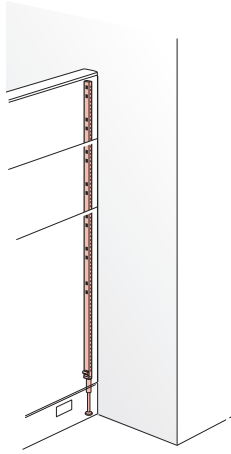


Wall Mount Kit

- Used to mount panel configurations to a structural wall
- Provides 1" (25mm) incremental slots used to mount panel-hung components
- Standard in black finish only
- Adds ¼" (6mm) to the panel width

HEIGHTS:

32" (813mm)
42" (1067mm)
48" (1219mm)
53" (1346mm)
58" (1473mm)
64" (1626mm)
74" (1880mm)
80" (2032mm)

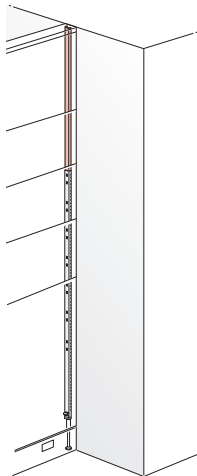

Floor-to-Ceiling Wall Mount Kit

- Used to mount floor-to-ceiling straight connectors to an architectural wall
- Standard in black color only
- Vertical height can be field cut to a minimum of 8" (203mm) to accommodate varying ceiling heights
- Adds ¼" (6mm) to the panel width

HEIGHT:





41" (1041mm)



Wall Track requires proper architectural support for installation purposes.

Variable-Height Covers for 90° and 120° Applications

PREMISE uses Variable-Height Covers to provide a finished appearance on exposed connectors in straight, 2-Way, 3-Way, and 4-Way conditions with unequal panel heights. They are installed on the exposed portion(s) of the tallest Panel Connector. (Panel Connectors must be specified separately).



Full-Height Variable-Height Cover




- Single cover providing a finished appearance on exposed connector between panel configurations of different heights
- Supports panel configurations which are equal to Monolithic Panel heights
- Specified as a single part number from lowest to highest panel configuration
- The bottom of the Variable-Height Cover is coped to fit over the lower panel top cap
- Includes a variable-height top cap and top cap adapter for the lower panel
- Vertical cover and top cap available in standard trim colors at base list price
- Wood veneer vertical cover and top cap available in a variety of wood species
- Vertical cover available in a multitude of fabric grades at same base list price

		HIGHEST PANEL HEIGHT				
		42"	48"	53"	64"	80"
LOWEST PANEL HEIGHT	32"	•	•	•	•	•
	42"		•	•	•	•
	48"			•	•	•
	53"				•	•
	64"					•

Notes • Metallic trim colors available at an upcharge.

- Trim covers may be used with standard, grooved, wood, or in a mixed panel top cap application. Each condition requires altering the catalog number to reflect the application. Refer to the Product Application section or the Price List for specification details.

Variable-Height Covers for 90° and 120° Applications

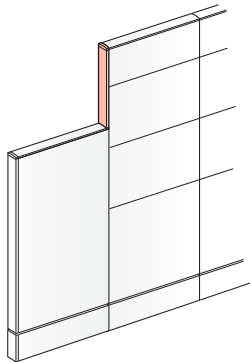

Sectional Variable-Height Cover

- Sectional cover providing a finished appearance on exposed connector between panel configurations of different heights
- Cover consists of 6" (152mm), 10" (254mm) and/or 16" (406mm)-high sections
- Also supports panel configurations which include a 32" (813mm)-high Foundation Element
- Specified as a single part number from lowest to highest panel configuration
- Includes a variable-height top cap and top cap adapter for the lower panel
- The bottom of the Variable-Height Cover is coped to fit over the lower panel top cap
- Vertical cover and top cap available in standard trim colors at base list price
- Wood veneer vertical cover and top cap available in a variety of wood species
- Vertical cover available in a multitude of fabric grades at same base list price

		HIGHEST PANEL HEIGHT					
		42"	48"	58"	64"	74"	80"
LOWEST PANEL HEIGHT	32"	•	•	•	•	•	•
	42"		•	•	•	•	•
	48"			•	•	•	•
	58"				•	•	•
	64"					•	•
	74"						•

Starter Variable-Height Cover


- Single cover providing a finished appearance on exposed connector between panel configurations of different heights
- Used when a full cover is desired and one of the panel configurations within the connection does not equal a Monolithic Panel height
- Specified as a single part number (specifier must determine height to be finished)
- The bottom of the Variable-Height Cover is coped to fit over the lower panel top cap
- Includes a variable-height top cap and top cap adapter for the lower panel
- Vertical cover and top cap available in standard trim colors at base list price
- Wood veneer vertical cover and top cap available in a variety of wood species
- Vertical cover available in a multitude of fabric grades at same base list price

HEIGHTS:
5" (127mm)
6" (152mm)
10" (254mm)
11" (279mm)
16" (406mm)
21" (508mm)
22" (533mm)
27" (686mm)
32" (813mm)
38" (965mm)
48" (1219mm)

Notes • Metallic trim colors available at an upcharge.

- Trim covers may be used with standard, grooved, wood, or in a mixed panel top cap application. Each condition requires altering the catalog number to reflect the application. Refer to the Product Application section or the Price List for specification details.

Variable-Height Covers for 90° and 120° Applications

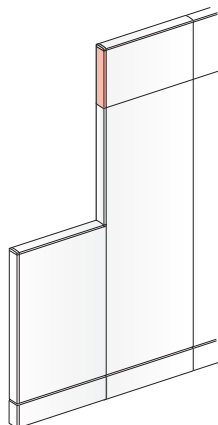

Extended Variable-Height Cover

- Single cover providing a finished appearance on exposed connector between panel configurations of different heights
- Used with a full, sectional or starter Variable-Height Cover
- Specified as a single part number
- The bottom of the extended Variable-Height Cover has a straight edge to fit on top of a full, sectional or starter Variable-Height Cover
- Includes one 10" (254mm) or 16" (406mm)-high vertical cover
- Does not include variable-height top cap or top cap adapter
- Vertical cover and top cap available in standard trim colors at base list price
- Wood veneer vertical cover and top cap available in a variety of wood species
- Vertical cover available in a multitude of fabric grades at same base list price


HEIGHTS:

10" (254mm)

16" (406mm)

Notes

- Metallic trim colors available at an upcharge.
- See Product Application Guidelines for planning information.
- Trim covers may be used with standard, grooved, wood, or in a mixed panel top cap application. Each condition requires altering the catalog number to reflect the application. Refer to the Product Application section or the Price List for specification details.



Floor-to-Ceiling Variable-Height Cover

- Single cover providing a finished appearance on exposed connector between panel configurations of different heights
- Specified as a single part number
- Includes top cap adapter and ceiling track finish piece
- Vertical cover and top cap available in standard trim colors at base list price
- Metallic trim colors available at an upcharge
- Wood veneer vertical cover and top cap available in a variety of wood species
- Vertical cover available in a multitude of fabric grades at same base list price

HEIGHT:

24" (610mm)

Adaptable Worksurfaces

Worksurface Shapes

The worksurfaces available for PREMISE have the following features:

- Laminate or Wood Surfaces with multiple edge options
- Core Options: Standard or Green
- Optional Wireways: With or Without Wireway



Rectangular



Rectangular Key



Rectangular Swell



Rectangular
Inverse Swell




Rectangular
Transition




Wedge




Rectangular
Radius End




Rectangular
Split Top




Corner, 90°
Straight Front




Corner, 90°
Wrap-Around




Corner, 90°
Notched




Corner, 90°
Angled




Corner, 90°
Split Top



Corner, 90°
Wrap-Around
Transitional




Corner, 90°
Notched Transitional




Corner, 90°
Angled Transitional

Adaptable Worksurfaces


Worksurface Shapes, continued




Corner, 90°
Wrap-Around
Extended



Corner, 90°
Wrap-Around
Transitional Extended



Corner, 90°
Notched Extended



90° Merger



Corner, 120° Wrap-Around



D-Shaped Convergent



Rectangular Convergent




D-Shaped Convergent
Wrap-Around



D-Shaped Ender



Bent



Countertop



120° Link



Conference End



Key Conference End

Note Handed shapes are available as mirror image.

Adaptable Worksurfaces

Worksurface Edge Finish/Shape/Options Chart

Worksurfaces are available with laminate or wood veneer surfaces.

SHAPE		EDGE TREATMENT						
		LAMINATE				WOOD		
		T-MOLD	EDGEBAND	CASCADE	KNIFE	EDGEBAND	CASCADE	KNIFE
KNIFE								
Rectangular		•	•	•	•	•	•	•
Rectangular Key		•	•	•	•	•	•	•
Rectangular Swell		•	•	•	•	•		•
Rectangular Inverse Swell		•	•	•	•	•		•
Rectangular Transition		•	•	•	•	•	•	•
Wedge		•	•	•	•	•	•	•
Rectangular Radius End		•	•	•	•	•	•	•
Rectangular Split Top		•	•	•		•	•	
Corner, 90° Straight Front		•	•		•	•		•
Corner, 90° Wrap-Around		•	•	•	•	•	•	•
Corner, 90° Notched		•	•	•	•	•	•	•
Corner, 90° Angled		•	•		•	•		•
Corner, 90° Wrap-Around Transitional		•	•	•	•	•	•	•
Corner, 90° Notched Transitional		•	•	•	•	•	•	•
Corner, 90° Angled Transitional		•	•		•	•		•
Corner, 90° Split Top		•	•	•		•	•	
Corner, 90° Wrap-Around Extended		•	•	•	•	•	•	•
Corner 90° Notched Extended		•	•	•	•	•	•	•
Corner 90° Wrap-Around Transitional Extended		•	•	•	•	•	•	•
90° Merger		•	•		•	•		•
Corner, 120° Wrap-Around		•	•	•	•	•		•
D-Shaped Convergent		•	•	•	•	•	•	•
Rectangular Convergent		•	•	•	•	•	•	•
D-Shaped Convergent Wrap-Around		•	•	•	•	•	•	•
D-Shaped Ender		•	•	•	•	•	•	•
Bent		•	•	•	•	•	•	•
Countertop		•	•	•	•	•	•	•
Conference End		•	•	•	•	•	•	•
Key Conference End		•	•	•	•	•	•	•
120° Link		•	•	•	•	•		•

Tip Refer to Price List for worksurface edge and size availability.


Adaptable Worksurfaces: Edge Options

Laminate Worksurfaces: 1 $\frac{3}{16}$ " Thick – (4) Edge Options


3mm T-Molding (T)



3mm Edgeband (J or F)

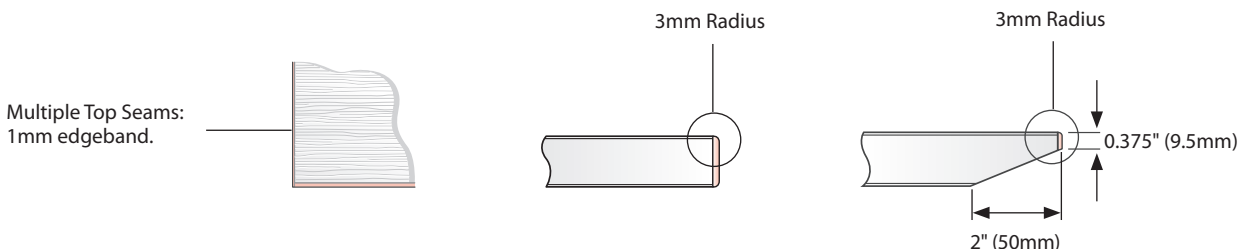


Cascade (V)

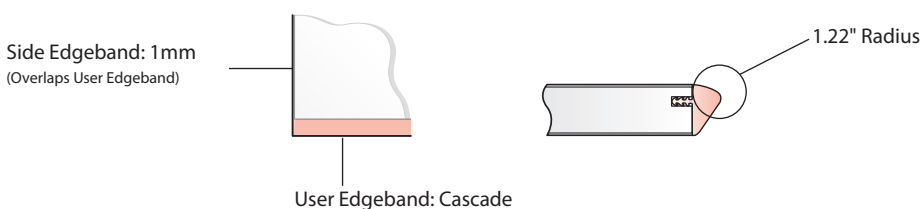


Wood Worksurfaces: 1 $\frac{3}{16}$ " Thick – (3) Edge Options

3mm Edgeband (K or U)

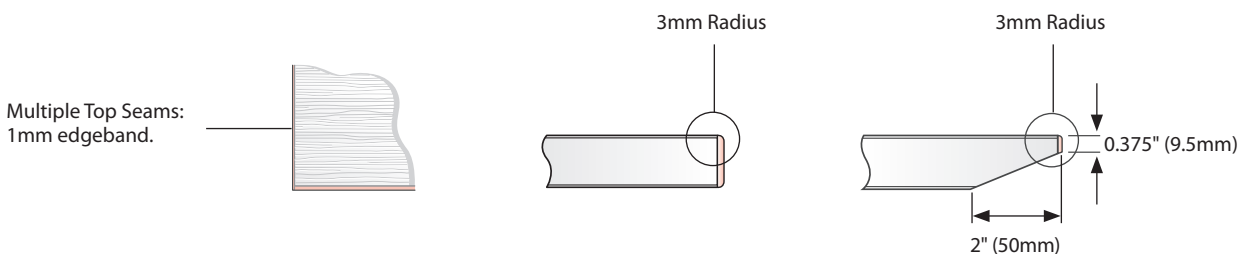

Cascade (M)

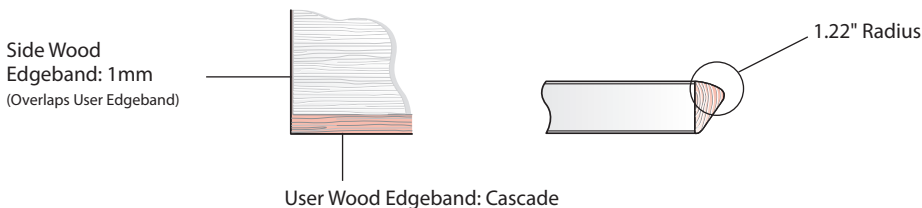

Knife edge available with green core option only.

Notes

- Worksurface supports must be specified separately.
- Refer to Cascade and Knife Worksurface Edge Planning Guidelines.

Adaptable Worksurfaces: Core Options

Core Material Options

Standard Core:

Made with an engineered composite panel with a minimum 90% wood fiber content with at least 10% post consumer and 80% pre-consumer wood fiber bonded with resin. These worksurfaces/tops are 3rd party certified compliant with GREENGUARD® and ANSI/BIFMA Standards for Low Emitting Products. The composite panel is 3rd party certified compliant with California Air Resource Board requirements for Phase 2 formaldehyde emission levels and includes wood fiber sourced from FSC certified forests using the 70% FSC Mix Credit System


Green Core:

Made with an engineered composite panel with a minimum 90% pre-consumer wood fiber content bonded with no-added urea formaldehyde resin. These worksurfaces/tops are 3rd party certified compliant with GREENGUARD® and ANSI/BIFMA Standards for Low Emitting Products. The composite panel is 3rd party certified compliant with California Air Resource Board requirements for Phase 2 formaldehyde emission levels.

Adaptable Worksurfaces

Dimensions


Rectangular (WURA)



NOMINAL VS (ACTUAL) DIMENSIONS

DEPTH	WIDTH		
18" = (17.68")	24" = (23.97")	60" = (59.97")	96" = (95.97")
24" = (23.68")	27" = (26.97")	63" = (62.97")	99" = (98.97")
30" = (29.68")	30" = (29.97")	66" = (65.97")	102" = (101.97")
	33" = (32.97")	69" = (68.97")	105" = (104.97")
	36" = (35.97")	72" = (71.97")	108" = (107.97")
	39" = (38.97")	75" = (74.97")	111" = (110.97")
	42" = (41.97")	78" = (77.97")	114" = (113.97")
	45" = (44.97")	81" = (80.97")	117" = (116.97")
	48" = (47.97")	84" = (83.97")	120" = (119.97")
	51" = (50.97")	87" = (86.97")	
	54" = (53.97")	90" = (89.97")	
	57" = (56.97")	93" = (92.97")	

Rectangular Key (WURY)

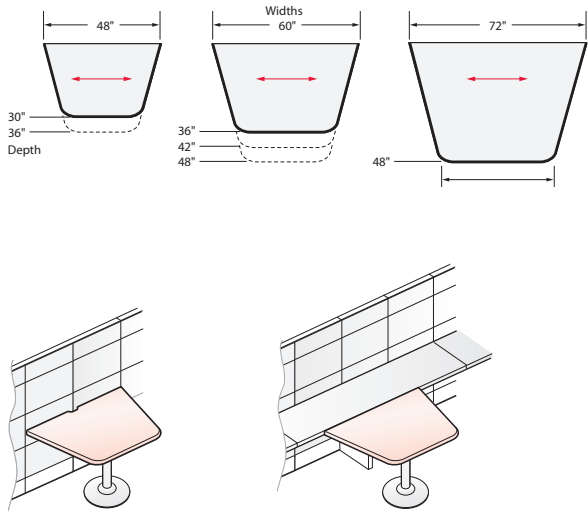

NOMINAL VS (ACTUAL) DIMENSIONS

DEPTH	WIDTH	LENGTH FLAT ON FRONT EDGE
30" = (29.68")	36" = (35.97")	(10.9")
30" = (29.68")	48" = (47.97")	(22.9")
36" = (35.68")	48" = (47.97")	(19.7")
36" = (35.68")	60" = (59.97")	(31.7")
36" = (35.68")	72" = (71.97")	(43.7")
42" = (41.68")	60" = (59.97")	(28.5")
42" = (41.68")	72" = (71.97")	(40.5")
48" = (47.68")	60" = (59.97")	(25.3")
48" = (47.68")	72" = (71.97")	(37.3")

Notes

- Worksurfaces require separately specified supports.
- Cascade and Knife user edges are indicated by thicker line.




Denotes direction of wood grain laminate and wood veneer grain. Refer to the Price List for availability of finishes on specific worksurfaces.

Adaptable Worksurfaces

Dimensions, continued

Rectangular Swell (WURS)




NOMINAL VS (ACTUAL) DIMENSIONS

DEPTH	WIDTH	SWELL DEPTH
18" = (17.68")	24" = (23.97")	21" = (20.68")
24" = (23.68")	30" = (29.97")	27" = (26.68")
30" = (29.68")	36" = (35.97")	33" = (32.68")
	42" = (41.97")	
	48" = (47.97")	
	54" = (53.97")	
	60" = (59.97")	

Not available with wood Cascade edge.

Rectangular Inverse Swell (WURW)




NOMINAL VS (ACTUAL) DIMENSIONS

DEPTH	WIDTH	INVERSE DEPTH
18" = (17.68")	24" = (23.97")	15" = (14.68")
24" = (23.68")	30" = (29.97")	21" = (20.68")
30" = (29.68")	36" = (35.97")	27" = (26.68")
	42" = (41.97")	
	48" = (47.97")	
	54" = (53.97")	
	60" = (59.97")	

Not available with wood Cascade edge.

Rectangular Transitional (WURT)



NOMINAL VS (ACTUAL) DIMENSIONS

DEPTH	WIDTH	FLAT
18"/24" = (17.68"/23.68")	24" = (23.97")	(5.97")
24"/30" = (23.68"/29.68")	30" = (29.97")	(11.97")
	36" = (35.97")	(17.97")
	42" = (41.97")	(23.97")
	48" = (47.97")	(29.97")
	54" = (53.97")	(35.97")
	60" = (59.97")	(41.97")


- Notes**
- Worksurfaces require separately specified supports.
 - Cascade and Knife user edges are indicated by thicker line.

↔ Denotes direction of wood grain laminate and wood veneer grain. Refer to the Price List for availability of finishes on specific worksurfaces.

Adaptable Worksurfaces

Dimensions, continued


Wedge (WURE)



NOMINAL VS (ACTUAL) DIMENSIONS

DEPTH	WIDTH
18" / 24" = (17.68" / 23.68")	24" = (23.97")
24" / 30" = (23.68" / 29.68")	30" = (29.97")
	36" = (35.97")
	42" = (41.97")
	48" = (47.97")
	54" = (53.97")
	60" = (59.97")


Rectangular Radius End (WURR)



NOMINAL VS (ACTUAL) DIMENSIONS

DEPTH	WIDTH	RADIUS
18" = (17.68")	24" = (23.97")	(8")
24" = (23.68")	30" = (29.97")	
30" = (29.68")	36" = (35.97")	
	42" = (41.97")	
	48" = (47.97")	
	54" = (53.97")	
	60" = (59.97")	

Rectangular Split Top (WURK)



NOMINAL VS (ACTUAL) DIMENSIONS

DEPTH	WIDTH	KEYBOARD WIDTH	REAR SURFACE DEPTH
24" = (23.68")	36" = (35.97")	(33.97")	24" = (16.56")
30" = (29.68")	42" = (41.97")	(39.97")	30" = (22.56")
	48" = (47.97")	(45.97")	

Not available with wood Knife edge.

Notes • Worksurfaces require separately specified supports.


• Cascade and Knife user edges are indicated by thicker line.

↔ Denotes direction of wood grain laminate and wood veneer grain. Refer to the Price List for availability of finishes on specific worksurfaces.

Adaptable Worksurfaces

Dimensions, continued

Corner, 90° Straight Front (WUCA)




NOMINAL VS (ACTUAL) DIMENSIONS

DEPTH	WIDTH	USER DEPTH
18" = (17.68")	36" = (35.68")	18" = (37.73")
24" = (23.68")	42" = (41.68")	24" = (41.97")
30" = (29.68")	48" = (47.68")	30" = (46.22")
	54" = (53.68")	

Not available in wood Cascade edge.

Corner, 90° Wrap-Around (WUCR)




NOMINAL VS (ACTUAL) DIMENSIONS

DEPTH	WIDTH	USER DEPTH	RADIUS
18" = (17.68")	36" = (35.68")	18" = (29.2")	(10.25")*
24" = (23.68")	42" = (41.68")	24" = (37.7")	
30" = (29.68")	48" = (47.68")	30" = (46.2")*	
	54" = (53.68")		

* Exception: 30" deep x 36" wide: 4.25" radius, 43.7" user depth. Not available with Cascade edge or designed to accept keyboard trays.

Corner, 90° Notched (WUCN)



NOMINAL VS (ACTUAL) DIMENSIONS

DEPTH	WIDTH	USER DEPTH
18" = (17.68")	36" = (35.68")	(34.8")
	42" = (41.68")	(39")
	48" = (47.68")	(43.3")
	54" = (53.68")	(47.5")
24" = (23.68")	36" = (35.68")	(39")
	42" = (41.68")	(43.3")
	48" = (47.68")	(47.5")
	54" = (53.68")	(51.8")
30" = (29.68")	36" = (35.68")	(44.1")*
	42" = (41.68")	(47.5")
	48" = (47.68")	(51.8")
	54" = (53.68")	(56")

* Exception: 30" deep x 36" wide: 4.25" radius, 44.1" user depth and not available with Cascade edge.

Notes • Worksurfaces require separately specified supports.


• Cascade and Knife user edges are indicated by thicker line.

↔ Denotes direction of wood grain laminate and wood veneer grain. Refer to the Price List for availability of finishes on specific worksurfaces.

Adaptable Worksurfaces

Dimensions, continued

Corner, 90° Angled (WUCU)




Left-Hand Shown

NOMINAL VS (ACTUAL) DIMENSIONS

DEPTH	WIDTH	USER DEPTH
18" = (17.68")	36" = (35.68")	(35.4")
	42" = (41.68")	(40")
	48" = (47.68")	(44.4")
	54" = (53.68")	(48.7")
24" = (23.68")	36" = (35.68")	(38.2")
	42" = (41.68")	(43.8")
	48" = (47.68")	(48.4")
	54" = (53.68")	(52.8")
30" = (29.68")	36" = (35.68")	(40")*
	42" = (41.68")	(46.3")
	48" = (47.68")	(52.2")
	54" = (53.68")	(56.9")

* Exception: 30" deep x 36" wide; 4.25" radius, 40" user depth. Not available with Cascade edge or designed to accept keyboard trays.

Corner, 90° Wrap-Around Transitional (WUCT)

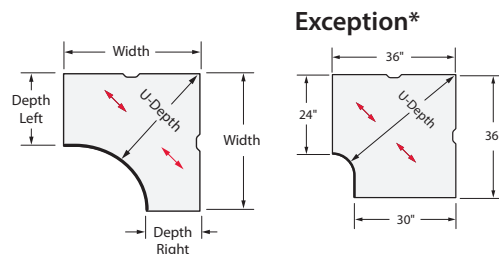


NOMINAL VS (ACTUAL) DIMENSIONS

DEPTH	WIDTH	USER DEPTH LEFT/RIGHT	RADIUS
18" = (17.68")	36" = (35.68")	18"/24" = (33.7")	(10.25")*
24" = (23.68")	42" = (41.68")	24"/18" = (33.7")	
30" = (29.68")	48" = (47.68")	24"/30" = (42.1")	
	54" = (53.68")	30"/24" = (42.1")	

* Exception: 24"/30" deep x 36" wide and 30"/24" deep x 36" wide; 4.25" radius, 39.7" user depth. Not available with Cascade edge or designed to accept keyboard trays.

Corner, 90° Notched Transitional (WUCH)



NOMINAL VS (ACTUAL) DIMENSIONS

DEPTH LEFT	WIDTH	USER DEPTH
18"/24" = (17.68"/23.68")	36" = (35.68")	(34.5")
	42" = (41.68")	(40.5")
	48" = (47.68")	(45.1")
	54" = (53.68")	(49.5")
24"/30" = (23.68"/29.68")	36" = (35.68")	(35")*
	42" = (41.68")	(42.3")
	48" = (47.68")	(48.7")
	54" = (53.68")	(53.5")

* Exception: 24"/30" deep x 36" wide and 30"/24" deep x 36" wide; 35" user depth. Not available with Cascade edge or designed to accept keyboard trays.

Notes • Worksurfaces require separately specified supports.


• Cascade and Knife user edges are indicated by thicker line.

↔ Denotes direction of wood grain laminate and wood veneer grain. Refer to the Price List for availability of finishes on specific worksurfaces.

Adaptable Worksurfaces

Dimensions, continued

Corner, 90° Angled Transitional (WUCF)




NOMINAL VS (ACTUAL) DIMENSIONS

DEPTH LEFT	WIDTH	USER DEPTH
18" / 24" = (17.68" / 23.68")	36" = (35.68")	(33.7")
	42" = (41.68")	(40.4")
	48" = (47.68")	(45.8")
	54" = (53.68")	(50.2")
24" / 30" = (23.68" / 29.68")	36" = (35.68")	(42.8")
	42" = (41.68")	(47.1")
	48" = (47.68")	(51.3")
	54" = (53.68")	(55.5")

Not available in Cascade edge.

Corner, 90° Split Top (WUCK)




NOMINAL VS (ACTUAL) DIMENSIONS

DEPTH	WIDTH	USER DEPTH	KEYBOARD WIDTH	REAR SURFACE DEPTH
24" = (23.68")	48" = (47.68")	(36.7")	(39.6")	(17.68")
30" = (29.68")	48" = (47.68")	(40.9")	(39.6")	(17.68")

Not available with wood Knife edge.


Corner, 90° Wrap-Around Extended (WUCE)

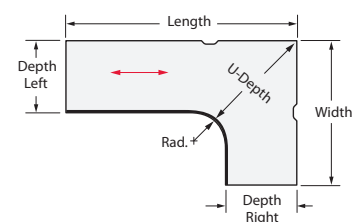

NOMINAL VS (ACTUAL) DIMENSIONS

DEPTH	WIDTH	LENGTH	USER DEPTH	RADIUS
18" = (17.68")	36" = (35.68")	42" = (41.68")	18" = (29.2")	(10.25")*
24" = (23.68")	42" = (41.68")	48" = (47.68")	24" = (37.7")*	
	48" = (47.68")	54" = (53.68")	30" = (46.2")*	
30" = (29.68")	54" = (53.68")	60" = (59.68")		
	60" = (59.68")	66" = (65.68")		
		72" = (71.68")		

Exception*



* Exception: 30" deep x 36" wide in all lengths: 4.25" radius, 43.7" user depth. Not available with Cascade edge or designed to accept keyboard trays.

Notes • Worksurfaces require separately specified supports.


• Cascade and Knife user edges are indicated by thicker line.

↔ Denotes direction of wood grain laminate and wood veneer grain. Refer to the Price List for availability of finishes on specific worksurfaces.

Adaptable Worksurfaces

Dimensions, continued

Corner, 90° Notched-Extended (WUCP)



NOMINAL VS (ACTUAL) DIMENSIONS

DEPTH	WIDTH	LENGTH	USER DEPTH
18" = (17.68")	36" = (35.68")	42" = (41.68")	(34.7")
		48" = (47.68")	
		54" = (53.68")	
		60" = (59.68")	
		66" = (65.68")	
		72" = (71.68")	
	42" = (41.68")	48" = (47.68")	(39")
		54" = (53.68")	
		60" = (59.68")	
		66" = (65.68")	
		72" = (71.68")	
	48" = (47.68")	54" = (53.68")	(43.2")
		60" = (59.68")	
		66" = (65.68")	
		72" = (71.68")	
	54" = (53.68")	60" = (59.68")	(47.5")
		66" = (65.68")	
		72" = (71.68")	
	60" = (59.68")	66" = (65.68")	(47.5")
24" = (23.68")	36" = (35.68")	42" = (41.68")	(39")
		48" = (47.68")	
		54" = (53.68")	
		60" = (59.68")	
		66" = (65.68")	
		72" = (71.68")	
	42" = (41.68")	48" = (47.68")	(43.2")
		54" = (53.68")	
		60" = (59.68")	
		66" = (65.68")	
		72" = (71.68")	
	48" = (47.68")	54" = (53.68")	(47.5")
		60" = (59.68")	
		66" = (65.68")	
		72" = (71.68")	
	54" = (53.68")	60" = (59.68")	(51.7")
		66" = (65.68")	
		72" = (71.68")	
	60" = (59.68")	66" = (65.68")	(47.5")
		72" = (71.68")	

* Exception: If width is 36" and worksurface depth of opposite side is 30", 44.1" user depth. Not available with Cascade edge or designed to accept keyboard trays.

Notes

- Worksurfaces require separately specified supports.
- Cascade and Knife user edges are indicated by thicker line.




Denotes direction of wood grain laminate and wood veneer grain. Refer to the Price List for availability of finishes on specific worksurfaces.

Adaptable Worksurfaces

Dimensions, continued

Corner, 90° Notched-Extended (WUCP), continued



NOMINAL VS (ACTUAL) DIMENSIONS			
DEPTH	WIDTH	LENGTH	USER DEPTH
30" = (29.68")	36" = (35.68")	42" = (41.68")	(44.1")*
		48" = (47.68")	
		54" = (53.68")	
		60" = (59.68")	
		66" = (65.68")	
		72" = (71.68")	
	42" = (41.68")	48" = (47.68")	(47.5")
		54" = (53.68")	
		60" = (59.68")	
		66" = (65.68")	
		72" = (71.68")	
	48" = (47.68")	54" = (53.68")	(51.8")
		60" = (59.68")	
		66" = (65.68")	
		72" = (71.68")	
	54" = (53.68")	60" = (59.68")	(56")
		66" = (65.68")	
		72" = (71.68")	
	60" = (59.68")	66" = (65.68")	(60.2")
		72" = (71.68")	

* Exception: If width is 36" and worksurface depth of opposite side is 30", 44.1" user depth. Not available with Cascade edge or designed to accept keyboard trays.


- Notes
- Worksurfaces require separately specified supports.
 - Cascade and Knife user edges are indicated by thicker line.

◀➡ Denotes direction of wood grain laminate and wood veneer grain. Refer to the Price List for availability of finishes on specific worksurfaces.

Adaptable Worksurfaces

Dimensions, continued


Corner, 90° Wrap-Around Transitional Extended (WUCX)



NOMINAL VS (ACTUAL) DIMENSIONS


DEPTH	WIDTH	LENGTH	USER DEPTH LEFT/RIGHT	RADIUS
18" = (17.68")	36" = (35.68")	42" = (41.68")	18"/24" = (33.7")	(10.25")*
24" = (23.68")	42" = (41.68")	48" = (47.68")	24"/18" = (33.7")	
30" = (29.68")	48" = (47.68")	54" = (53.68")	24"/30" = (42.1")*	
	54" = (53.68")	60" = (59.68")	30"/24" = (42.1")*	
	60" = (59.68")	66" = (65.68")		
		72" = (71.68")		

Exception*



* Exception: If width is 36" and worksurface depth of opposite side is 30"; 4.25" radius, 39.7" user depth. Not available with Cascade edge or designed to accept keyboard trays.

90° Merger (WUCQ)



NOMINAL VS (ACTUAL) DIMENSIONS

DEPTH	WIDTH	USER DEPTH	RADIUS
18" = (17.68")	36" = (35.68")	(27.5")	(6")
	42" = (41.68")		
	48" = (47.68")		
	54" = (53.68")		
24" = (23.68")	36" = (35.68")	(36")	
	42" = (41.68")		
	48" = (47.68")		
	54" = (53.68")		
30" = (29.68")	36" = (35.68")	(44.5")	
	42" = (41.68")		
	48" = (47.68")		
	54" = (53.68")		

- Exception: If width is 36" and worksurface depth of opposite side is 30", 43.7" user depth.
- Not available with Cascade edge or designed to accept keyboard trays.

Notes

- Worksurfaces require separately specified supports.
- Cascade and Knife user edges are indicated by thicker line.




Denotes direction of wood grain laminate and wood veneer grain. Refer to the Price List for availability of finishes on specific worksurfaces.

Adaptable Worksurfaces

Dimensions, continued


Corner, 120° Wrap-Around (WUCZ)



NOMINAL VS (ACTUAL) DIMENSIONS		
DEPTH	WIDTH	USER DEPTH
18" = (17.68")	36" = (35.868")	(26.8")
	42" = (41.868")	(28.4")
	48" = (47.868")	(30")
	54" = (53.868")	(31.6")
	60" = (59.868")	(33.2")
24" = (23.68")	36" = (35.868")	(32.8")
	42" = (41.868")	(34.4")
	48" = (47.868")	(36")
	54" = (53.868")	(37.6")
	60" = (59.868")	(39.2")
30" = (29.68")	36" = (35.868")	(38.8")
	42" = (41.868")	(40.4")
	48" = (47.868")	(42")
	54" = (53.868")	(43.6")
	60" = (59.868")	(45.2")

Wood worksurfaces not available in Cascade edge.

D-Shaped Convergent (WURD)



NOMINAL VS (ACTUAL) DIMENSIONS		
WIDTH	LENGTH	DIAMETER
24" = (23.97")	36" = (35.68")	(23.97")
30" = (29.97")	42" = (41.68")	(29.97")
36" = (35.97")	48" = (47.68")	(35.97")
	54" = (53.68")	
	60" = (59.68")	
	66" = (65.68")	
	72" = (71.68")	

- Notes**
- Worksurfaces require separately specified supports.
 - Cascade and Knife user edges are indicated by thicker line.

↔ Denotes direction of wood grain laminate and wood veneer grain. Refer to the Price List for availability of finishes on specific worksurfaces.

Adaptable Worksurfaces

Dimensions, continued


Rectangular Convergent (WURV)



NOMINAL VS (ACTUAL) DIMENSIONS

WIDTH	LENGTH
24" = (23.97")	36" = (35.68")
30" = (29.97")	42" = (41.68")
36" = (35.97")	48" = (47.68")
	54" = (53.68")
	60" = (59.68")
	66" = (65.68")
	72" = (71.68")


D-Shaped Convergent, Wrap-Around (WUCD)

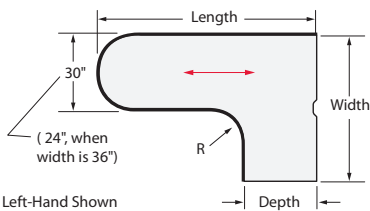

NOMINAL VS (ACTUAL) DIMENSIONS

DEPTH	WIDTH	LENGTH	RADIUS
18" = (17.68")	36" = (35.97")	60" = (59.68")	(10.25")
24" = (23.68")	42" = (41.97")	66" = (65.68")	
30" = (29.68")	48" = (47.97")	72" = (71.68")	
	54" = (53.97")		
	60" = (59.97")		

D-Shaped Ender (WUDD)



NOMINAL VS (ACTUAL) DIMENSIONS

DEPTH	LENGTH	DIAMETER
18" = (17.68")	36" = (35.97")	(17.68")
24" = (23.68")	42" = (41.97")	(23.68")
30" = (29.68")	48" = (47.97")	(29.68")
	54" = (53.97")	
	60" = (59.97")	
	66" = (65.97")	
	72" = (71.97")	


- Notes**
- Worksurfaces require separately specified supports.
 - Cascade and Knife user edges are indicated by thicker line.

↔ Denotes direction of wood grain laminate and wood veneer grain. Refer to the Price List for availability of finishes on specific worksurfaces.

Adaptable Worksurfaces

Dimensions, continued

Bent (WUCB)

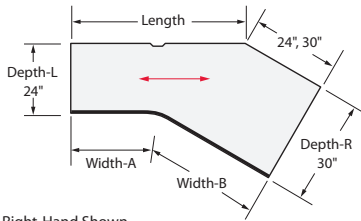


Right-Hand Shown

NOMINAL VS (ACTUAL) DIMENSIONS

DEPTH LEFT	DEPTH RIGHT	WIDTH	LENGTH	WIDTH A	WIDTH B	RADIUS
24" = (23.68")	30" = (29.68")	24" = (23.68")	36" = (35.97")	(14.8")	(24.9")	(10.25")
			42" = (41.97")	(20.8")	(24.9")	
			48" = (47.97")	(26.8")	(24.9")	
			60" = (59.97")	(38.8")	(24.9")	
		30" = (29.68")	36" = (35.97")	(14.8")	(30.9")	
			42" = (41.97")	(20.8")	(30.9")	
			48" = (47.97")	(26.8")	(30.9")	
			60" = (59.97")	(38.8")	(30.9")	

Countertop (WUTS)



NOMINAL VS (ACTUAL) DIMENSIONS

DEPTH	WIDTH			
12" = (12")	21" = (20.97")	47" = (46.97")	72" = (71.97")	99" = (98.97")
	23" = (22.97")	48" = (47.97")	75" = (74.97")	101" = (100.97")
	24" = (23.97")	51" = (50.97")	77" = (76.97")	102" = (101.97")
	27" = (26.97")	53" = (52.97")	78" = (77.97")	105" = (104.97")
	29" = (28.97")	54" = (53.97")	81" = (80.97")	107" = (106.97")
	30" = (29.97")	57" = (56.97")	83" = (82.97")	108" = (107.97")
	33" = (32.97")	59" = (58.97")	84" = (83.97")	111" = (110.97")
	35" = (34.97")	60" = (59.97")	87" = (86.97")	113" = (112.97")
	36" = (35.97")	63" = (62.97")	89" = (88.97")	114" = (113.97")
	39" = (38.97")	65" = (64.97")	90" = (89.97")	117" = (116.97")
	41" = (40.97")	66" = (65.97")	93" = (92.97")	119" = (118.97")
	42" = (41.97")	69" = (68.97")	95" = (94.97")	120" = (119.97")
	45" = (44.97")	71" = (70.97")	96" = (95.97")	

Notes • Worksurfaces require separately specified supports.



• Cascade and Knife user edges are indicated by thicker line.

↔ Denotes direction of wood grain laminate and wood veneer grain. Refer to the Price List for availability of finishes on specific worksurfaces.

Adaptable Worksurfaces

Dimensions, continued



Conference End (WUDC)

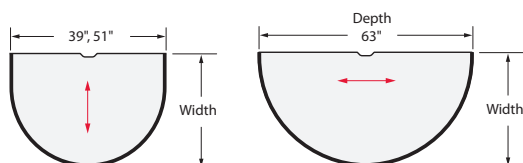

NOMINAL VS (ACTUAL) DIMENSIONS

DEPTH	WIDTH
39" = (38.97")	30" = (29.68")
51" = (50.97")	
63" = (62.97")	


Key Conference End (WURY)

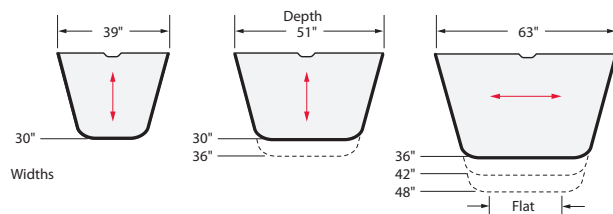

NOMINAL VS (ACTUAL) DIMENSIONS

DEPTH	WIDTH	LENGTH FLAT ON FRONT EDGE
39" = (38.97")	30" = (29.68")	(13.9")
51" = (50.97")	30" = (29.68")	(25.9")
51" = (50.97")	36" = (35.68")	(22.7")
63" = (62.97")	36" = (35.68")	(34.7")
63" = (62.97")	42" = (41.68")	(31.5")
63" = (62.97")	48" = (47.68")	(28.2")

120° Link (WUDZ)



NOMINAL VS (ACTUAL) DIMENSIONS

DEPTH
18" = (17.68")
24" = (23.68")
30" = (29.68")

Wood worksurfaces not available in Cascade edge.

- Notes**
- Worksurfaces require separately specified supports.
 - Cascade and Knife user edges are indicated by thicker line.

↔ Denotes direction of wood grain laminate and wood veneer grain. Refer to the Price List for availability of finishes on specific worksurfaces.


Adaptable Worksurfaces — Wireway Options and Locations

Worksurface Wireway Locations


Worksurfaces are available with or without wireways. Location and quantity of wireway(s) is dependent upon worksurface shape and size. The following features/options may vary by worksurface shape and size.

- Wireways are color matched to side/back edge trim
- When wood veneer or wood grain laminate is specified, wireway will be charcoal


Notched Option A

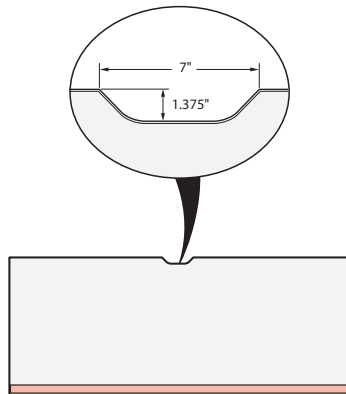


Curved Option B

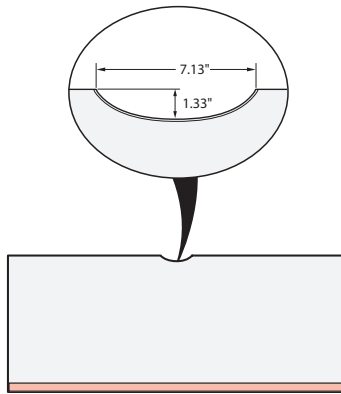


General dimension guidelines for wireway location :




Rectangular




Rectangular



Corner




Extended Corner




Bent




D-Shaped Convergent



D-Shaped Convergent
Wrap Around



Rectangular Key



- Notes**
- Worksurfaces require separately specified support, refer to Price List for details.
 - Worksurfaces specified without wireways require a power plug to be placed behind the worksurface prior to installation. To pass a power plug behind an installed worksurface without wireways may require removing and reinstalling the worksurface.

Adaptable Worksurfaces: Wireway Options and Locations


Worksurfaces are available with or without wireways. Location and quantity of wireway(s) is dependent upon worksurface shape and size.

1. Rectilinear Worksurfaces


- Location of wireway is dependent upon worksurface size:
 - Worksurfaces up to 60" wide will have one wireway centered along back edge.
 - Worksurfaces greater than 60" wide will have two wireways along back edge. Wireways are located one quarter the distance from each end of worksurface.

Optional Wireway Detail


One Wireway



Rectangular





Rectangular Swell




Rectangular Radius End


Two Wireways



Rectangular





Rectangular Inverse Swell




Wedge


Example:



Rectangular Transition



Rectangular Split Surface




Rectangular Key

Note Worksurfaces do not include panel mounted support elements. Worksurfaces require separately specified support, refer to Price List for details.


Adaptable Worksurfaces: Wireway Options and Locations

2. Corner 90°, Corner 120°, and Corner 90° and 120° Corner Transition Worksurfaces


- Worksurfaces have two wireways. One wireway centered along each back edge as shown in.




Corner, 90° Wrap-Around




Corner, 120° Wrap-Around




Corner, 90° Wrap-Around




Corner, 120° Wrap-Around




Corner, 90° Straight Front




Corner, 90° Wrap-Around Transitional




Corner, 90° Split-Top




Corner, 90° Notched




Corner, 90° Angled



Corner, 90° Notched Transitional



Corner, 90° Angled Transitional




90° Merger

Note Worksurfaces do not include panel mounted support elements. Worksurfaces require separately specified support, refer to Price List for details.


Adaptable Worksurfaces: Wireway Options and Locations

3. Corner 90° Extended and Transitional Extended


- Worksurfaces have two wireways and the workway locations are dependent upon worksurface size:
 - The first wireway is centered along the back edge of the shorter side.
 - The second wireway is located along the back edge of the longer side. It is located the same distance from the back corner as the first wireway as shown in example below.




- Refer to example above to determine wireway locations.



Corner, 90°
Wrap-Around Extended



Corner, 90° Wrap-Around
Transitional Extended



Corner, 90°
Notched Extended

Note


Worksurfaces do not include panel mounted support elements. Worksurfaces require separately specified support, refer to Price List for details.

Adaptable Worksurfaces: Wireway Options and Locations


4. Rectangular Convergent, D-Shaped Convergent, D-Shaped Convergent Wrap-Around and Conference End

- Location of wireway is centered on the depth or width side of these worksurfaces:

Rectangular Convergent




D-Shaped Convergent




Optional Wireway:
The wireway is centered on the width side of a D-Shaped Convergent Worksurface

D-Shaped Convergent Wrap-Around




Optional Wireway:
The wireway is centered on the width side of a D-Shaped Convergent Wrap-Around Worksurface

Conference End



Optional Wireway:
The wireway is centered on the depth side of a Conference End worksurface. To accommodate End-of-Run Finish Post, specify wireway.


Key Conference End



Note Worksurfaces do not include panel mounted support elements. Worksurfaces require separately specified support, refer to Price List for details.


- The worksurfaces shown below are only available without wireways for application reasons.

D-Shaped Ender



Without Wireway: Only

120° Link




Without Wireway: Only

Adaptable Worksurfaces: No Wireway Option

Product Applications: General Application Guidelines

No Wireways (Option C)

Worksurfaces specified without wireways require the cord of a power plug to be located behind the worksurface prior to installing it to the panel. To pass a power plug behind an installed worksurface without wireways may require removing the worksurface from the panel to allow the power plug to pass behind the worksurface.




Rectangular Worksurface
(without wireway)




Rectangular Worksurface
(with one wireway)


Components with Power Plugs




Desktop Port



Adaptable Electronic
Ballast Task Light



Adaptable Task Light:
Starter Unit



Enhanced
Power Module

Tip

- Adaptable Worksurfaces with wireways will allow clearance for power plug after the worksurface is installed.
- Installation of Desktop Port is possible on installed worksurface with a notched wireway.

Adaptable Worksurfaces: Application


Worksurface Support Brackets

- Adaptable Worksurfaces do not include worksurface supports. A tie plate is included and is used to tie together the front edge of the adjacent worksurface.
- All worksurface supports must be separately specified.




18" Deep Adaptable Worksurfaces with Lower Storage Considerations

- Lateral file units should not be located beneath an 18" deep nominal (17.68" actual) Adaptable Worksurface.
- X Series lateral file units are 18.75" deep and will extend past the front edge of the worksurface.
- 950 Series and V Series files are 18" deep and also should not be used under an 18" deep nominal (17.68" actual) worksurface.
- 18" deep nominal (17" actual) Pedestal Drawers may be used beneath 18" deep nominal worksurfaces.


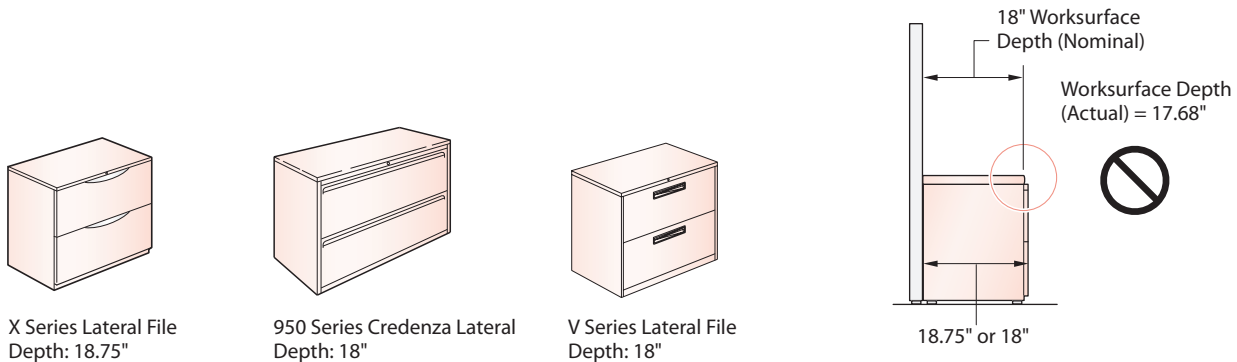


Attachment Brackets: General Specifications

Adaptable Worksurfaces can be used with multiple system product lines. However, attachment brackets are product line specific.

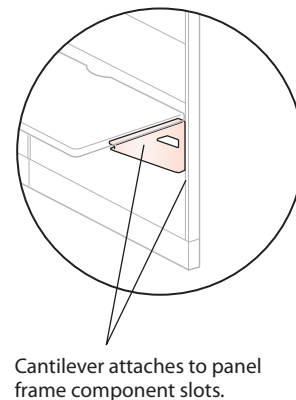

Adaptable Worksurfaces: Application






Product Applications: Conference End and Key Conference End Worksurfaces




The panel system specific Conference End and Key Conference End worksurface are determined by the depth of the adjoining worksurfaces and by the panel system thickness.

Conference End and Key Conference End depths for PREMISE panel systems include: 39", 51", and 63". Available with or without a wireway.


Conference End Applications



Key Conference End Applications




Adaptable Worksurfaces: Application

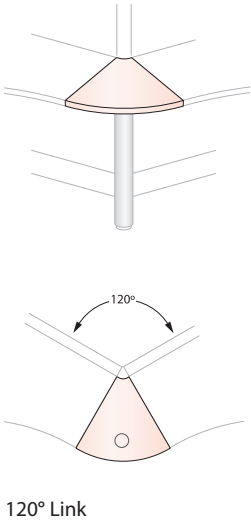

Product Applications: 120° Link Worksurface


The panel system specific 120° Link worksurface is determined by the depth of the adjoining worksurfaces and by the panel system thickness.

120° Link worksurface actual widths for PREMISE panel system include: 21", 27", and 33".

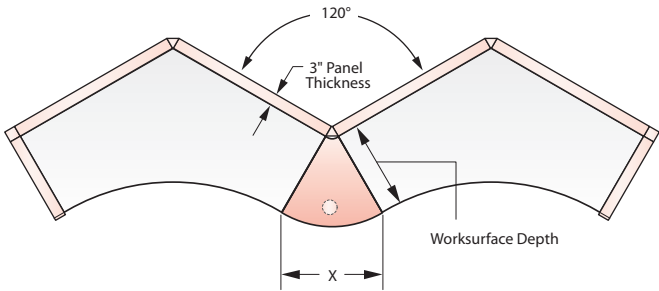


	WORKSURFACE DEPTH	PANEL THICKNESS	X =
WUDZ - 1821 - (_ _ _) C	18"	3"	21"
WUDZ - 2427 - (_ _ _) C	24"	3"	27"
WUDZ - 3033 - (_ _ _) C	30"	3"	33"

Adaptable Worksurfaces: Application





Product Applications: D-Shaped Ender Worksurface




The depth of the D-Shaped Ender is designed to attach to the depth of an adjoining worksurface.



Adjoining Worksurface:



D-Shaped Ender Application:

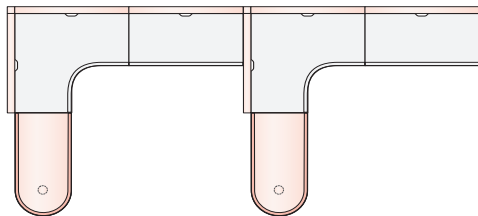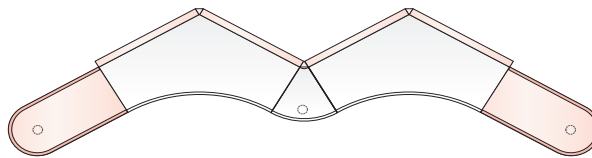


Tips

- The D-Shaped Ender is not available with a wireway.
- The actual dimension of the D-Shaped Ender depth and the D-Shaped Convergent width are different for specific product applications.

Worksurface Support

Worksurface Reinforcement Option

Separately specified worksurface reinforcement channels provide additional support for worksurfaces with 50" (1270mm) spans that are heavily loaded and not supported by mid-span cantilevers or worksurface support panels.

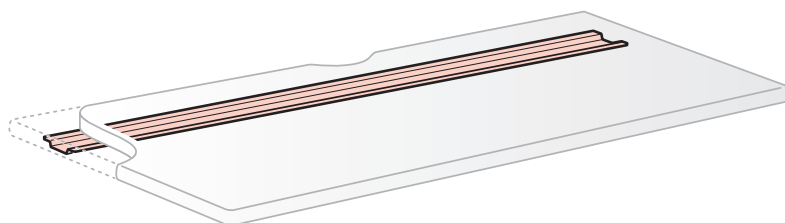


Length: 16", 24", 32", 39", 47", and 54"

Note Worksurface reinforcement channel is not intended to replace cantilevers or other worksurface support options.

Upper Storage, Task Lights, and Task Organization


Adaptable Upper Storage




Shelf




Straight Mini-Shelf



Corner Mini-Shelf



Up Mount Shelf




Up Mount Bracket Shelf




Standard Overhead Storage Unit
Flipper Doors

- Available With:
- Standard Mount
 - Up Mount
 - Standard Off-Modular
 - Up Mount Off-Modular
 - Wall Mount



Standard Overhead Storage Unit
Cabinet Doors


- Available With:
- Standard Mount
 - Up Mount
 - Wall Mount




Standard Overhead Storage Unit
Single Slider Doors

- Available With:
- Standard Mount
 - Up Mount
 - Wall Mount


Adaptable Task Lights




Adaptable Electronic Ballast Task Light



Adaptable Task Light:
Daisy Chain Starter Unit




Adaptable Task Light:
Daisy Chain Add-On Unit




Adaptable LED Task Light


Display: Panel Attached




Tackboards



Tack Strips



Markerboard




Wall Accessory Slat Pad


- For use with Belong and Jump Stuff slat mounted tools only. Rail mounted tools cannot be used.

Work Tools

Jump Stuff

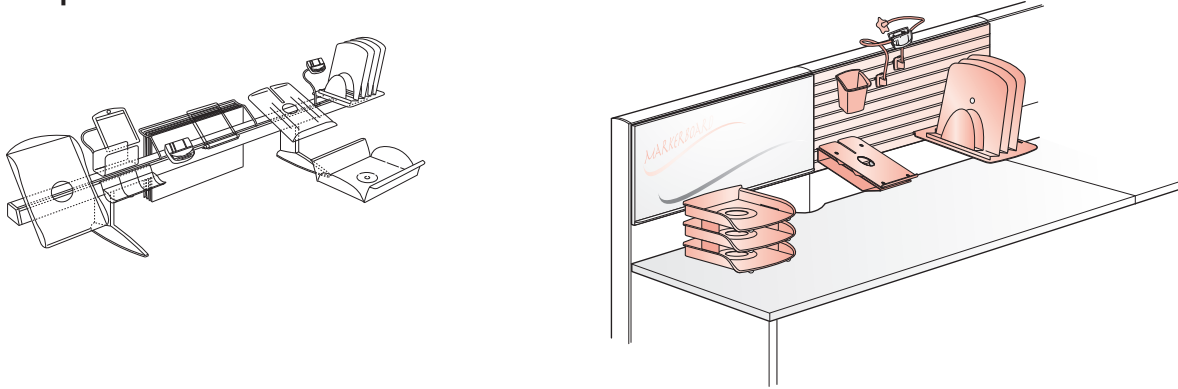

Belong Accessories

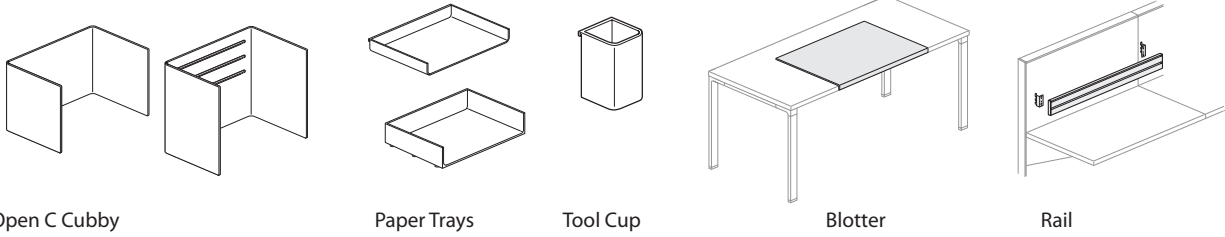

Open C Cubby


Paper Trays

Tool Cup

Blotter

Rail

Accessories

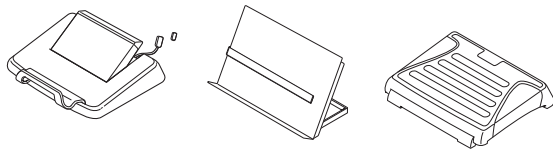


Laptop Holder


Document Holder

Footrest


Task Organization (Panel Attached with Mounting Bar)




Diagonal Unit:
Suspended




Diagonal Unit:
Freestanding




Vertical Unit:
Suspended



Vertical Unit:
Freestanding




Horizontal Unit:
Suspended



Horizontal Unit:
Freestanding




Paper Management
Tray Packages




Paper Management
Mounting Bar

Work Tools

BRAZO - Lighting

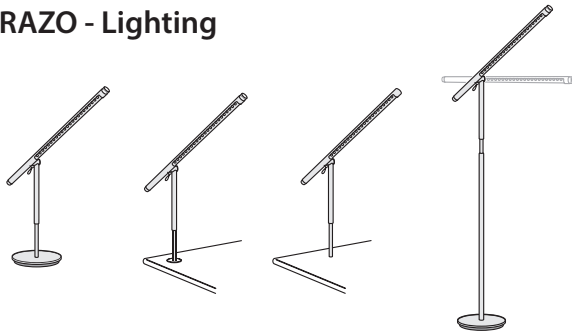


LIM L - Lighting

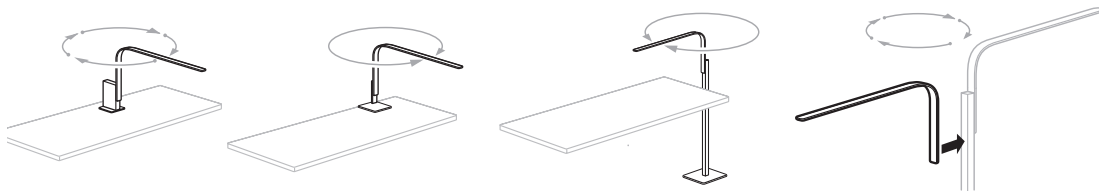

Upper Storage

Overhead Storage Units and open shelves offer users plenty of above-the-worksurface storage for books, binders, etc.

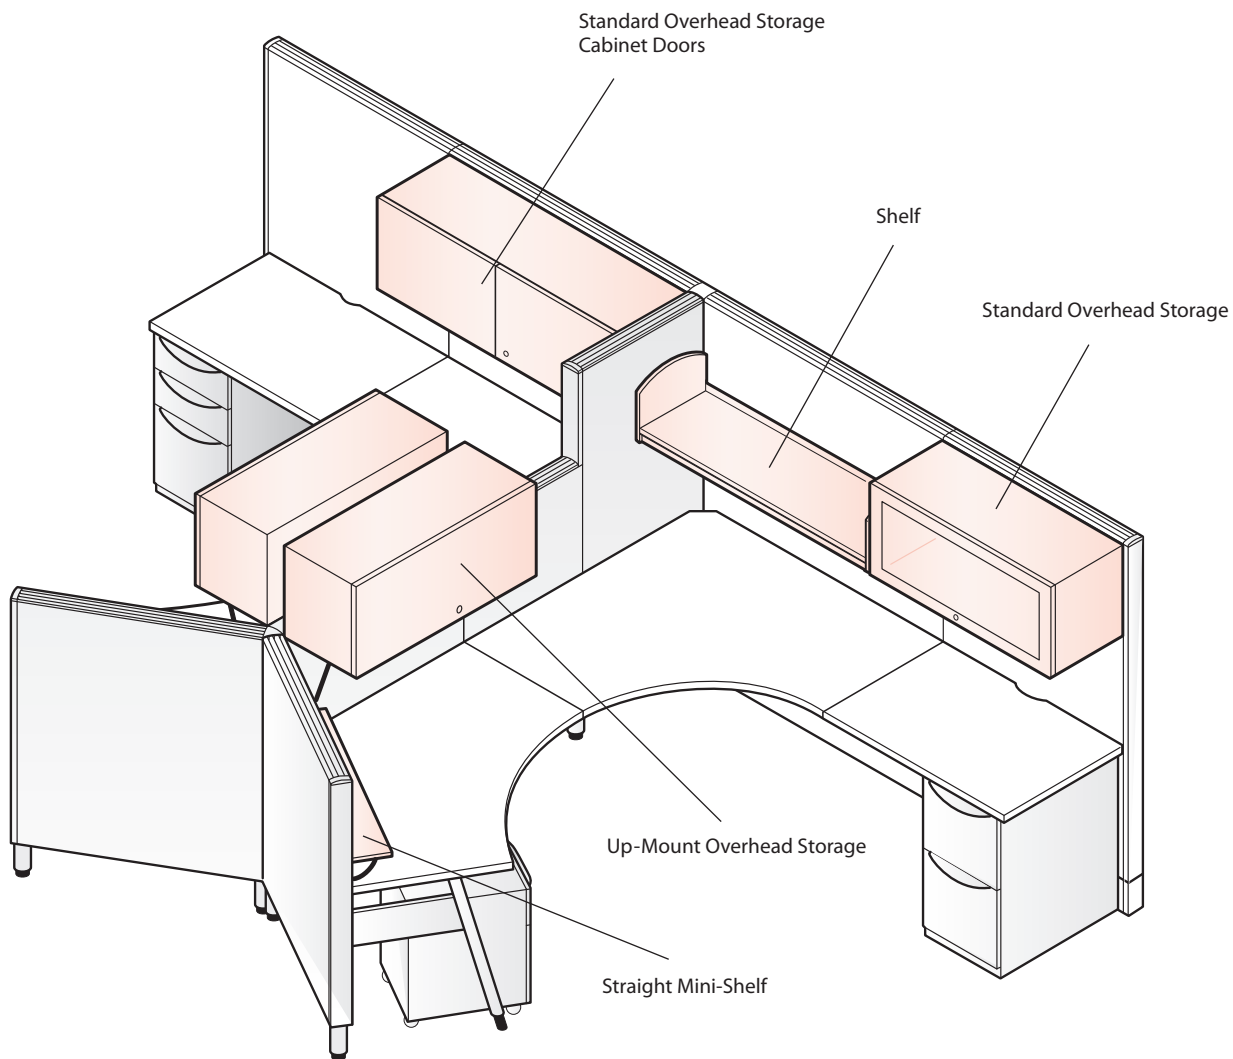

Note Adaptable Task Lights are available for Standard, Up-Mount Overhead Storage Units and shelves.

Upper Storage

Shelf and Standard Overhead Storage

- Locks optional on all units with doors
- Backstop on shelves and overheads
- Anti-dislodgement device on shelves and overheads

Straight and Corner Mini-Shelf

- Designed for lightweight accessories
- Install in connector slots

Off-Modular Overhead Storage Unit

- Designed to be installed with a Monolithic or Stackable Panel configuration with Grooved Top Caps: refer to application section for details
- Locks optional and separately specified
- Backstop on shelf and overhead

Up-Mount Overhead Storage Unit and Bracket Shelf


- Designed to be used with Monolithic Panels, 16" Stack Kits or 16" stack pads
- Locks are optional on overhead and specified separately
- Overhead has full back
- Shelf has back stop
- Anti-dislodgement device on shelves and overheads

Up-Mount Off-Modular Overhead Storage Unit

- Designed to be used with Monolithic or 16" Stackable Panel configuration with Grooved Top Caps: refer to application section for details
- Locks are optional on overhead and specified separately
- Overhead has full back
- Anti-dislodgement device on shelves and overheads

- Notes**
- Adaptable Task Lights are available for standard, up-mount Overhead Storage Units and shelves.
 - See Product Application Support and Load guidelines and width application chart.

Adaptable Task Lighting

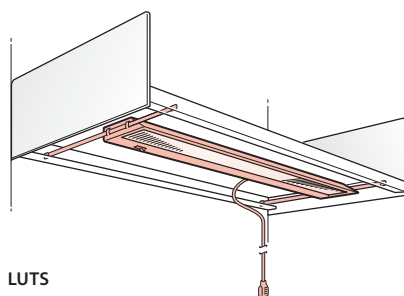


Adaptable Components Task Lights can be mounted below regular depth shelves, Overhead Storage Units, countertops, and vertical storage unit shelves. Their acrylic lenses provide a prismatic light distribution with an optional batwing lens. Lights are shipped standard with low mercury content T8 fluorescent lamps which have a 20,000 hour rated life. All lights utilize electronic ballasts which are energy efficient, provide greater light output, and operate at a lower temperature — reducing energy consumption up to 40%.

Task Light Options

Undershelf Task Lights are mounted below adaptable Overhead Storage Units and shelves. They are designed to illuminate worksurfaces and other task-oriented areas.

Mounted Task Light



Task Lights can be mounted under countertops to illuminate the worksurface below the countertop. Specify a Task Light that's one(1) size smaller than the countertop's width. The countertop must be shifted 1" off-center towards the side the light is attached to.

Task Lights are shipped with a 6' (1829mm) power cord installed on the fixture's right-hand side; the cord can be field-retrofitted to a left-hand orientation on 42" and 54" lights. An optional 9' (2743mm) cord is available. Chicago Electrical code lights are also available.

Undershelf Task Light Mounting


Undershelf Task Lights are shipped with mounting brackets for installation under regular-depth shelf units. Task Lights can be the same width as or narrower than the supporting unit:

- On equal-width units, brackets allow front-to-back fixture adjustment.
- On narrower-width units, brackets allow both front-to-back and side-to-side fixture adjustment.
- Task Light is flush to underside of adaptable regular-depth shelf.
- Does not protrude below mounted surface.

Front-to-Back Adjustment



Front-to-Back and Side-to-Side Adjustment



Starter/Add-on Lights (Daisy Chain)

Starter lights with Add-On lights allow for connecting lights in a daisy chain configuration. The first light in the configuration must be a Starter light and all subsequent lights must be an Add-On light. A total of up to five lights including the Starter Light can be connected together in a run not to exceed 20' in length.

- Starter lights are available in 42" and 54" widths with optional 6' or 9' power cord.
- Add-On lights are available in 42" or 54" widths with optional 15" or 48" Linking Cord.
- Mounting options are the same as a regular Adaptable Task Light.


Adaptable Components, Fixed-Intensity, Electronic Ballast: LUTS Series

NOMINAL SIZE	ACTUAL SIZE	LAMP	WATTS	POWER FACTOR	STANDARD BALLAST	STANDARD LENS
24" (610mm)	19" (483mm)	3500K 13W T8*, 18" (457mm) long	13	Normal (>.5)	Electronic	Prismatic
30" (762mm)	25" (635mm)	3500K 17W T8*, 24" (610mm) long	17	Normal (>.5)	Electronic	Prismatic
42" (1067mm)	37" (940mm)	3500K 25W T8*, 36" (914mm) long	25	Normal (>.5)	Electronic	Prismatic
54" (1372mm)	49" (1245mm)	3500K 32W T8*, 48" (1219mm) long	32	Normal (>.5)	Electronic	Prismatic


* Only T8 Tri-Phosphor Optic lamps can be used.

Note A Task Light may be of equal or less width than the unit to which it is attached, but may not span across adjacent units.


Reed Premier™ LED Task Light

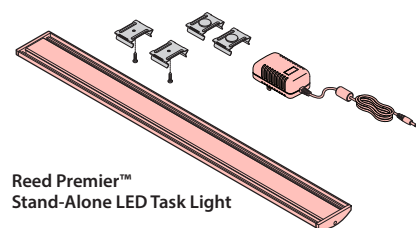



Reed Premier™
Stand-Alone LED Task Light

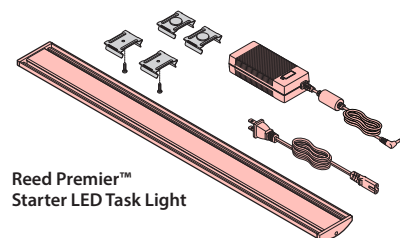


Reed Premier™
Starter LED Task Light



Reed Premier™
Add-On LED Task Light –
For Use with Reed Premier
Starter LED Task Lights

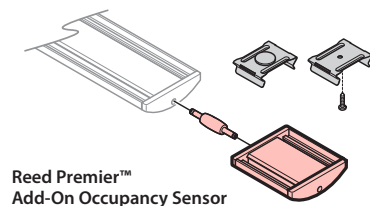

Reed Premier™
Add-On Occupancy Sensor

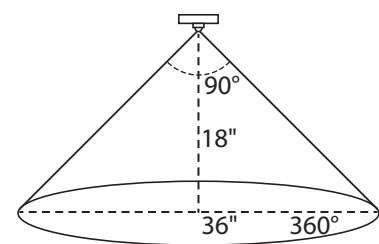

Direction Range

- 360° lens view
- 90° outward detection angle
- 30" coverage diameter at 15"
- 36" coverage diameter at 18"

Reed Premier™ LED task lights can be mounted under laminate, wood or steel surfaces and come standard with both magnetic and screw mounting options. The lights switch allows for instant on and soft off with infinite dimming. LED task lights can be the same width or narrower than the supporting surface. Magnetic attachment allows the user to move and reposition light when needed.

LED Task Light Specs

Size	Actual Length	Wattage	Peak Output:	
			Lumens	Foot Candles
17"	16.4"	7.8	444	76
31"	30.1"	17.6	980	131
44"	43.7"	25.9	1412	148
58"	57.4"	33.6	1791	151

Rated Lifespan (LED): 50,000 hours Dimming: 100%-15%
 Color Temperature: 3500K Auto Turn Off: 10 Hours (+/- 15 minutes)
 Color Rendering Index: 84 ETL Listed

Daisy Chain

Add-On (Daisy Chain) LED Task Lights can be added to starter LED Task Lights to link multiple lights together. The total wattage of daisy chained lights is limited by the wattage of the power supply. Refer to the chart below to see all acceptable combinations of daisy chained lights.

Acceptable Daisy Chain Light Combinations


Daisy Chain Combinations	# of 17" Lights	# of 30" Lights	# of 44" Lights	# of 58" Lights
Combination 1	6	0	0	0
Combination 2	5	0	0	0
Combination 3	4	1	0	0
Combination 4	4	0	0	0
Combination 5	3	1	0	0
Combination 6	3	0	1	0
Combination 7	3	0	0	0
Combination 8	2	2	0	0
Combination 9	2	1	0	0
Combination 10	2	0	1	0
Combination 11	2	0	0	1
Combination 12	2	0	0	0
Combination 13	1	2	0	0
Combination 14	1	1	1	0
Combination 15	1	0	1	0
Combination 16	1	0	0	1
Combination 17	0	2	0	0
Combination 18	0	1	1	0
Combination 19	0	0	2	0

Reed Premier Occupancy Sensor

The Occupancy Sensor can be added to control single or multiple daisy chained Reed Premier LED Task Lights. The Occupancy Sensor is set to turn off after 30 minutes of no detection and will turn back on after detection.

Occupancy Sensor Mounting

The occupancy sensor connects to the task light with a 1" connector (shown) or daisy chain cords. The occupancy sensor comes standard with both magnetic and screw mounting options.




Power → Sensor → Connector → Fixture

**Cannot deviate from this sequence*


Lower Storage: X Series and V Series

X Series Attached Pedestals




Height: 27½"
Width: 15"
Depths: 17", 23", and 29"

V Series Attached Pedestals




Height: 27½"
Width: 15"
Depths: 17", 23", and 29"

X Series Two-High Attached Lateral File




Height: 27½"
Width: 297/8", 357/8", and 417/8"
Depths: 18¾"

V Series Two-High Attached Lateral File




Height: 27½"
Width: 297/8", 357/8", and 417/8"
Depths: 18"

X Series Two-High Attached Combination Unit

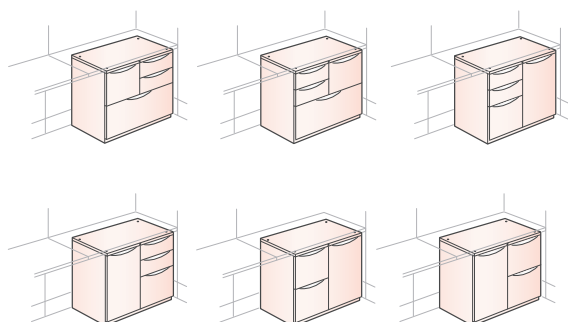

Height: 27½"
Width: 297/8", 357/8", and 417/8"
Depths: 18¾"

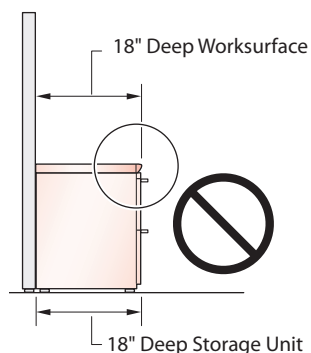


X Series Lateral Files and Combination Units
V Series Lateral Files





- Notes**
- 18" deep worksurfaces with T-Mold, Edgeband, and Cascade edges will accept 18" deep X Series and V Series pedestals; however, lateral files or combination units are not compatible.
 - 18" deep worksurfaces with Knife edge will not accept X Series or V Series 18" deep products.
 - For additional steel storage options and accessories refer to Steel Casegoods, Files, and Storage Price List.

Concentrative

120° Concentrative

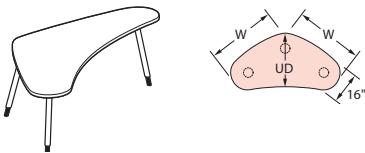





NOMINAL VS (ACTUAL) DIMENSIONS	
USER DEPTH	WIDTH
26" (660mm)	36" (914mm)
28" (711mm)	42" (1067mm)
30" (762mm)	48" (1219mm)
34" (864mm)	60" (1524mm)




90° Concentrative





NOMINAL VS (ACTUAL) DIMENSIONS	
USER DEPTH	WIDTH
28" (711mm)	36" (914mm)
31" (787mm)	42" (1067mm)
34" (884mm)	48" (1219mm)
40" (1016mm)	60" (1524mm)



60° Concentrative




NOMINAL VS (ACTUAL) DIMENSIONS	
USER DEPTH	WIDTH
42" (1067mm)	48" (1219mm)
52" (1321mm)	60" (1524mm)




Tables

Collaborative

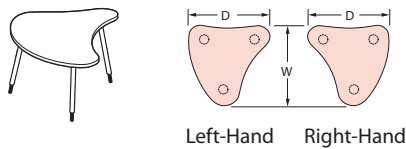


NOMINAL VS (ACTUAL) DIMENSIONS	
USER DEPTH	WIDTH
42" (1067mm)	36" (914mm)
	42" (1067mm)
	48" (1219mm)
44" (1118mm)	60" (1524mm)

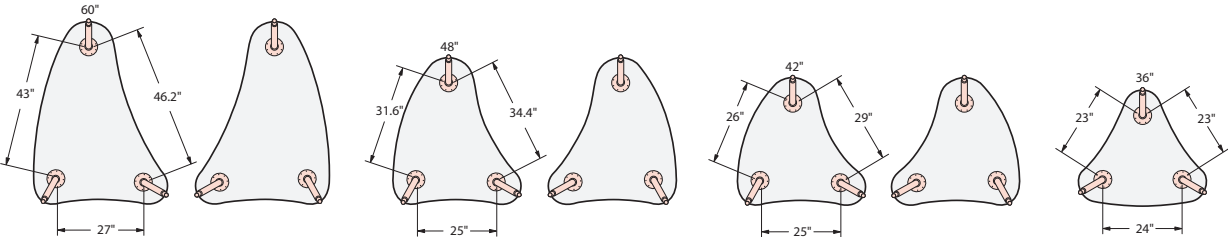


Transactional: Symmetric




NOMINAL VS (ACTUAL) DIMENSIONS	
WIDTH	
36" (914mm)	
42" (1067mm)	
48" (1219mm)	
60" (1524mm)	

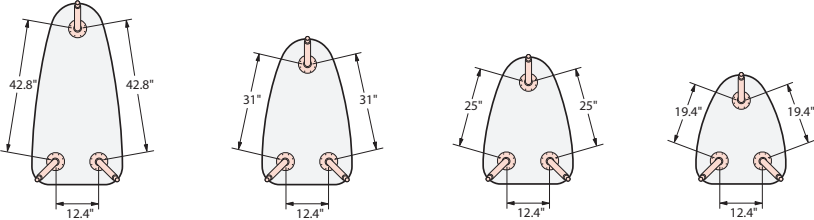

Transactional: Asymmetric



NOMINAL VS (ACTUAL) DIMENSIONS	
WIDTH	
36" (914mm)	
42" (1067mm)	
48" (1219mm)	
60" (1524mm)	

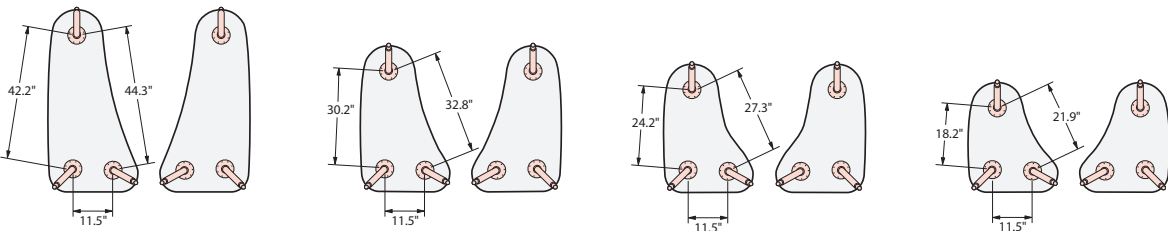

Tables

Round



NOMINAL VS (ACTUAL) DIMENSIONS

DIAMETER
35¾" (908mm)
41¾" (1060mm)
47¾" (1213mm)


Teardrop



NOMINAL VS (ACTUAL) DIMENSIONS




HEIGHT	DEPTH
29" (737mm)	24" (610mm)
	30" (762mm)

Rectangular





NOMINAL VS (ACTUAL) DIMENSIONS

HEIGHT	DEPTH	WIDTH
29" (737mm)	30" (762mm)	60" (1524mm)
		72" (1829mm)
	36" (914mm)	72" (1829mm)

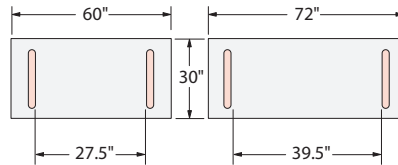



Bean





NOMINAL VS (ACTUAL) DIMENSIONS

DEPTH	WIDTH
24" (610mm)	36" (914mm)
	48" (1219mm)





Bend



NOMINAL VS (ACTUAL) DIMENSIONS

DEPTH	WIDTH
32" (813mm)	42" (1067mm)
33" (838mm)	56" (1422mm)




↔ Denotes direction of wood grain laminate and wood veneer grain. Refer to the Price List for availability of finishes on specific worksurfaces.

Tables: Overview

PREMISE tables are available in a variety of shapes, sizes and surfaces to address specific work styles and create unique design statements.



Round Table




Rectangular Table




Teardrop Table



Mobile Teardrop Table



Bend Table



Bean Table




- Round, rectangular, and teardrop tables with glides provide 1" (25mm) height adjustment range.
- Round, rectangular, and teardrop tables with casters do not have any height adjustment capability.
- Bend and Bean tables have an adjustment range in caster or glide from 27" – 31".


Tri Tables

Tri Tables are available in various shapes and sizes. The leg height adjustment range of 26" to 32" allows table heights that move and nest to adapt to each personal work style. Tables with caster option have adjustment range of 27" to 32".


Tri Tables are pre-drilled to accept worktop-mounted Screens and certain Tri Tables can accept AKPs (see Price List for details).




120° Concentrative




90° Concentrative



60° Concentrative



Collaborative



Transactional: Symmetric



Transactional: Asymmetric

Notes

- Please refer to Tables price book for more information.

This page intentionally left blank.

This page intentionally left blank.



PREMISE Application Guidelines

Planning Vertically

Monolithic and Super Base Panels are the starting point of a panel configuration. They may be used alone or with Upper Structure Elements. Upper Structure Elements may be added to a Foundation Element to create varying levels of privacy. Upper Structure Elements consist of Stack Kits, Stack Pads or Floor-To-Ceiling pad sets. Upper Structure Elements of corresponding width may be added to a Foundation Element to achieve an overall height up to 120" (3048mm). Full height monolithic pads are also available.

Visual privacy elements may be used to add height to a panel configuration. Visual privacy elements consist of Toppers, Canopies, and Banners. Toppers and Canopies must be used with a Grooved Top Cap. Unlike Stack Kits they do not require Panel Connectors for support because they are attached to the panel top cap.

Panel Configuration Components


Foundation Elements

- Monolithic fabric panel: 32" (813mm), 42" (1067mm), 48" (1219mm), 53" (1346mm), 64" (1626mm), 80" (2032mm)-high
- Glazed Monolithic Panel: 64" (1626mm), and 80" (2032mm)-high
- Single door panel assembly: 80" (2032mm)-high
- Super Base Panel: 32" (813mm)-high, only
- Monolithic full height pad: 42", 48", 58", and 64"


Upper Structure Elements

- Stack kit or Stack Pad: 10" (254mm) and 16" (406mm)-high
- Floor-to-Ceiling Pad Set: 24" (610mm)-high, only
- Monolithic Pad Elements - Full height: 42"(1067mm), 48"(1219mm), 58"(1473mm), 64"(1626mm).

64"-High Application

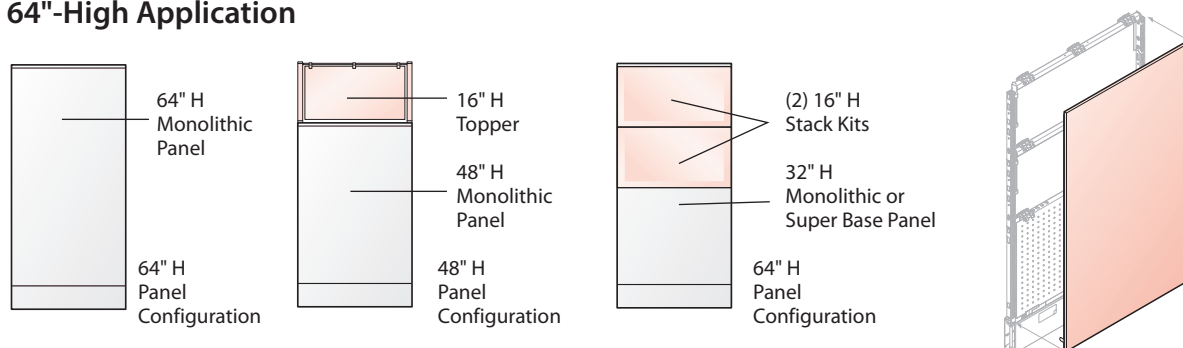

Designing with Upper Structure Elements

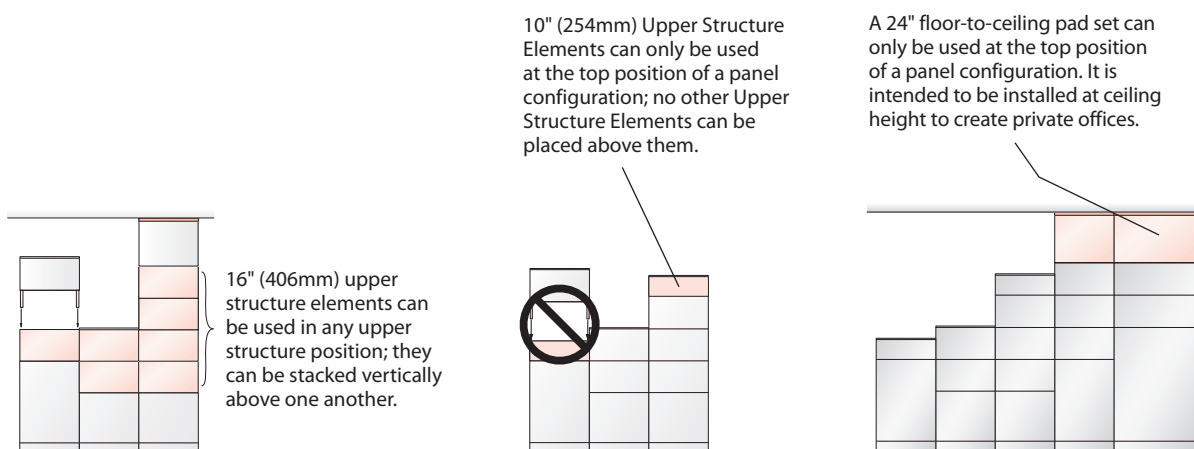


Tip Visual privacy elements; Toppers, Canopies, and Banners are not considered part of a panel configuration.

Panel Configuration Options

All panel configurations shown below include Foundation Elements. Foundation Elements may be used alone or with Upper Structure Elements in 10", 16", or 24" high increments.


The final configuration in all the drawings in this section include a floor-to-ceiling (FTC) pad set at the top of the panel. FTC pad sets can be field modified to the maximum height of 120" (3048mm). They can be modified from 24" (610mm) to a minimum of 8" (203mm); less than 8" is not recommended.

32" (813mm)-High Foundation Element: Allows 14 Panel Configurations

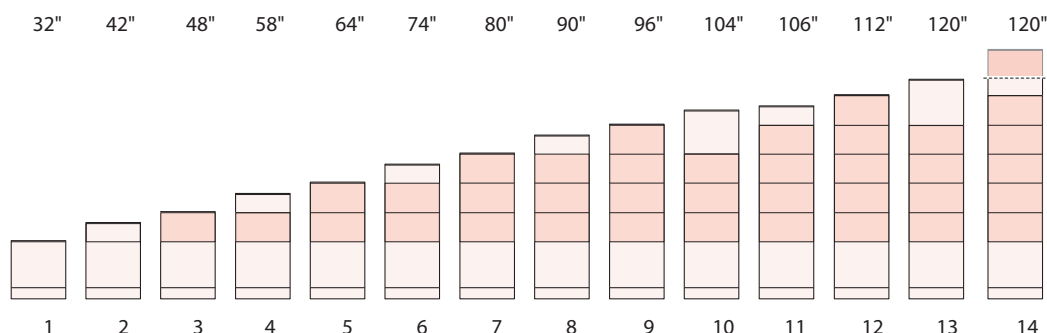


Tip Panel configurations which utilize 90° Panel Connectors may not extend beyond 120" (3048mm)-high. 120" applications may not extend beyond 80" (2032mm)-high and must be used with full-height Panel Connectors only (32", 42", 48", 53", 58", 64" and 80").

42" (1067mm)-High Foundation Element: Allows 13 Panel Configurations

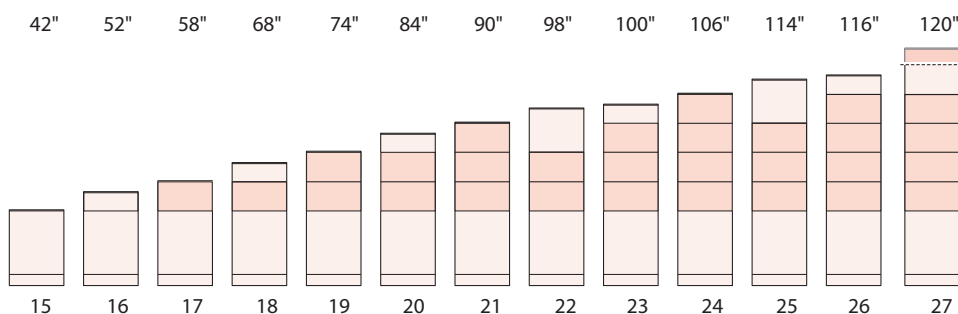

Tip Using the 42" (1067mm) panel with 10" (254mm) and 16" (406mm) Upper Structure Elements may create panel configurations that do not correspond with standard connector heights.


48" (1219mm)-High Foundation Element: Allows 12 Panel Configurations

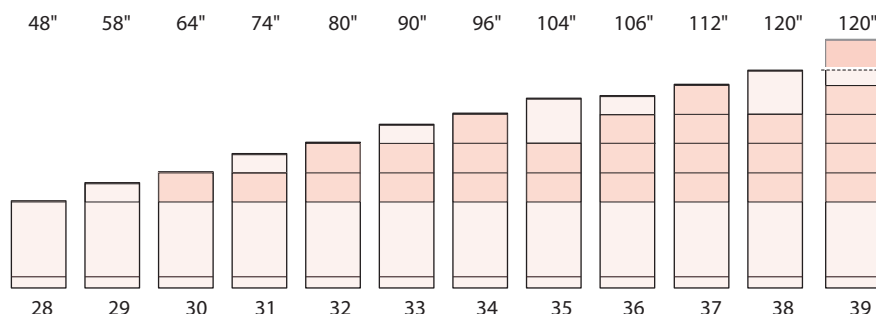

Panel Configuration Options


All panel configurations shown below include Foundation Elements. Foundation Elements may be used alone or with Upper Structure Elements in 10", 16", or 24" high increments.

53" (1346mm)-High Foundation Element: Allows 12 Panel Configurations

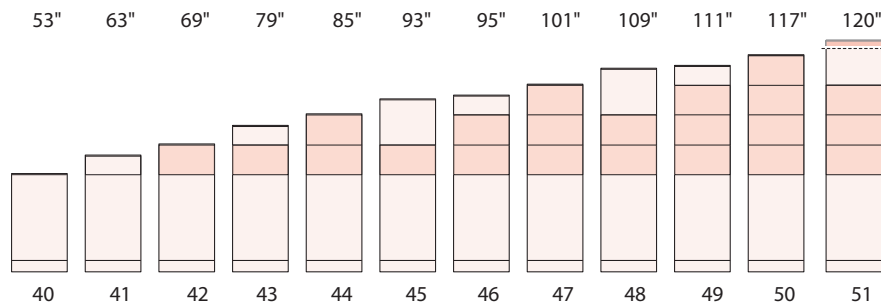


Tip Using the 53" (1346mm) panel with 10" (254mm) and 16" (406mm) Upper Structure Elements may create panel configurations that do not correspond with standard connector heights.

64" (1626mm)-High Foundation Element: Allows 10 Panel Configurations

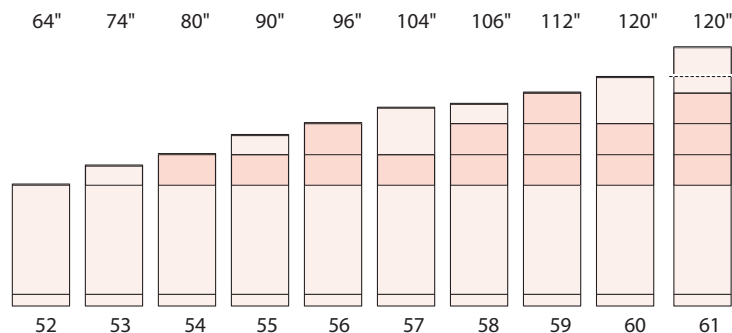


80" (2032mm)-High Foundation Element: Allows 8 Panel Configurations

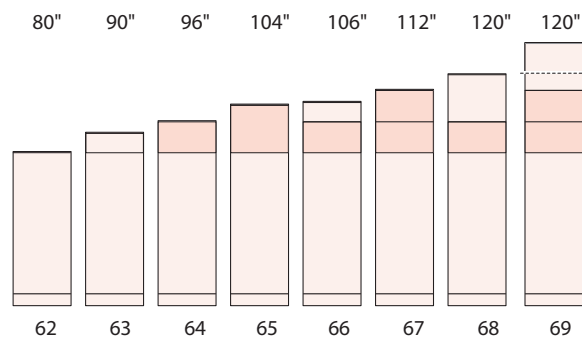

Panel Connections: 90° Applications

PREMISE utilizes a series of separately specified connectors to attach straight, 2-Way, 3-Way, 4-Way, and end-of-run panel conditions. The PREMISE connector has been designed to provide multiple levels of flexibility depending on the panel application. Choose connectors that best meet your current and future needs.




Straight Full-Height Connector

Full-Height Connectors

One-piece connectors correspond with Monolithic Panel heights. They are used to attach foundation and Upper Structure Elements within a panel intersection.

Tip

Panel Connectors types include Standard, Grooved, or Wood Top Cap options, for open or closed base raceway applications. Specify the appropriate product number for specific product attributes.




Straight Pre-Configured Connector

Pre-Configured (Sectional) Connectors

Sectional Connectors include a 32" (813mm) Full-Height Connector plus 10" (254mm) or 16" (406mm) Extended Connectors. These connectors are designed to be used with 32" (813mm)-high Monolithic or Super Base Panels to achieve configuration heights of 42" (1067mm), 48" (1219mm), 64" (1626mm), 80" (2032mm).

Tips

- Panel Connectors types include Standard, Grooved, or Wood Top Cap options, for open or closed base raceway applications. Specify the appropriate product number for specific product attributes.
- Pre-Configured Connectors can only be used with a panel configuration that includes a 32" (813mm) Foundation Element (i.e., 32" (813mm) Monolithic or Super Base Panel).



Straight Extended Connector

Extended Connectors

Extended Connectors can be added to Full-Height Connectors, Pre-Configured Connectors and additional Extended Connectors to increase the vertical height of a panel configuration. Extended Connectors are available in 10" (254mm) and 16" (406mm) heights to correspond with Upper Structure Elements.



Straight FTC Connector

FTC Connectors

Floor-to-Ceiling connectors can be added to Full-Height Connectors and Pre-Configured Connectors; the resulting combinations can be added to 16" (406mm)-high Extended Connectors to finish the configuration to the ceiling. FTC connectors are available 24" (610mm) to correspond with FTC pad sets.

Panel Connections: 90° Applications

Panel Connector/Cover Availability

Straight In-Line Condition: Catalog number includes connector(s).

FULL-HEIGHT CONNECTOR	PRE-CONFIGURED (SECTIONAL) CONNECTOR	EXTENDED CONNECTOR	FLOOR-TO-CEILING CONNECTOR
32", 42", 48", 53", 58", 64", 80"	42", 48", 64", 80"	10", 16"	24"

2-Way, 3-Way, and End-of-Run Panel Conditions:

Catalog number includes connector(s) and vertical cover.

	FULL-HEIGHT CONNECTOR	PRE-CONFIGURED (SECTIONAL) CONNECTOR	EXTENDED CONNECTOR	FLOOR-TO-CEILING CONNECTOR
FULL-HEIGHT COVER	32", 42", 48", 53", 58", 64", 80"		10", 16"	24"
PRE-CONFIGURED COVER	42", 48", 64", 80"	Mixed connector application*	N/A	N/A

* Mixed Connector Application: Consists of multiple catalog numbers. Either a Full-Height Connector or a pre-configured (sectional) connector in addition to an extended connector(s)


4-Way Condition: Catalog number includes connector(s).

FULL-HEIGHT CONNECTOR	PRE-CONFIGURED (SECTIONAL) CONNECTOR	EXTENDED CONNECTOR	FLOOR-TO-CEILING CONNECTOR
32", 42", 48", 53", 58", 64", 80"	Mixed connector application*	10", 16"	24"

* Mixed Connector Application: Consists of multiple catalog numbers. Either a Full-Height Connector or a pre-configured (sectional) connector in addition to an extended connector(s)

Panel Connections: 120° Applications

PREMISE 120° Panel Connectors attach panels in a 2-Way or 3-Way panel condition. They are available with Full-Height Connectors and cover, if applicable. 120° Panel Connectors may not be used with Extended Panel Connectors or with floor-to-ceiling Panel Connectors.

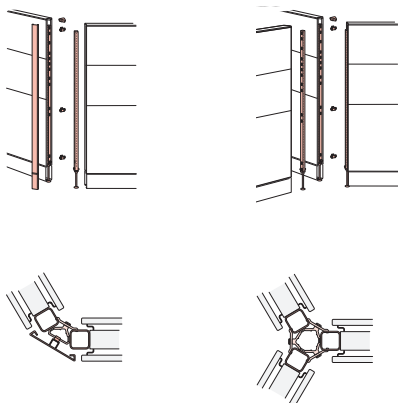

Full-Height Covers

One-piece connectors that correspond with Monolithic Panel heights. They are used to attach foundation and Upper Structure Elements within a panel intersection.




Panel Connectors types include standard or Grooved Top Cap options for open or closed base raceway panels. Specify the appropriate product number for specific product attributes.

Panel reveals for 120° applications are wider than 90° panel applications.

Connector Covers


All 2-Way, 3-Way, and End-of-Run Connectors include covers and top caps. Covers and Top Caps provide a finished appearance and conceal the routing of power and communication cabling between panels.

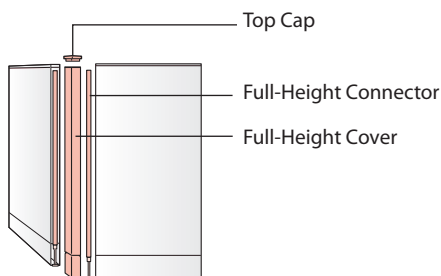

2-Way, Full-Height Connector
with Full-Height Cover

90° and 120°, Full-Height Covers

One-piece covers that correspond with all Monolithic Panel heights. Available with Full-Height Connectors.

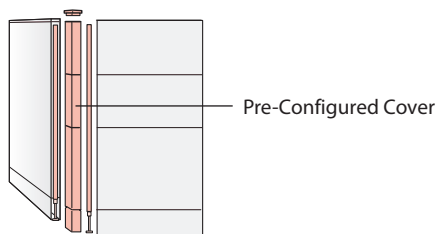

2-Way, Full-Height Connector
with Pre-Configured Cover

90°, Pre-Configured (Sectional) Covers

Sectional covers that match the foundation and upper structure elements. Available with Full-Height Connectors as a single catalog number. Pre-configured covers always include a 32" (813mm) full-height cover plus a 10" (254mm) cover or multiple 16" (406mm) covers.




Specifying sectional covers with a Full-Height Connector lets you create a stackable aesthetic in the most cost-effective manner.

Specifying Panel Connectors and Covers

The three application options shown below show the reconfiguration flexibility and price scalability of PREMISE 90° Panel Connectors. Choose Application (1) if flexibility is not a priority and cost effectiveness is a key factor. If moderate flexibility at a slightly greater cost factor is important, choose Application (2). If the most important factor is flexibility, Application (3) is your best choice.

Example: 90°, 2-Way Panel Connector; 64" high panel configuration:


Application 1



Two Connector Options:

- 64" (1626mm)-high Full-Height Connector with full-height cover (as shown) or
- 64" (1626mm)-high Full-Height Connector with pre-configured cover


Application 2



A Mixed Connector Application:

- 48" (1219mm)-high full connector with full-height cover
- 16" (406mm)-high extended connector with cover

Application 3



A Mixed Connector Application:

- 32" (813mm)-high Full-Height Connector with full-height cover
- Two 16" (406mm)-high Extended Connectors with covers


Specifying Panel Connectors and Covers

Specifying Panel Connectors: End-of-Run Condition

Panel Connectors come with multiple options to work with your panel configurations. Connector types include Standard, Grooved, or Wood Top Cap options for open or closed base raceway applications. Each of these product attributes are embedded in the catalog logic. See examples shown below for specification details.

The example below is using Full-Height Connectors and cover.

Standard Top Cap



Closed Raceway
NLR (_) - 48 - SN
S = Standard Top Cap
N = Closed Raceway

Grooved Top Cap




Closed Raceway
NLR (_) - 48 - GN
G = Grooved Top Cap
N = Closed Raceway

Catalog Logic:

N = PREMISE
L = Full-Height
Connector with
Full-Height Cover
R = End-of-Run
Condition
(_) = Surface Option
for Vertical Cover
48 = 48" High

Standard Top Cap



Open Raceway
NLR (_) - 48 - S1
S = Standard Top Cap
1 = One Open Raceway

Grooved Top Cap



Open Raceway
NLR (_) - 48 - G1
G = Grooved Top Cap
1 = One Open Raceway

Tips


- Specify a closed base Panel Connector if the adjacent panel has a closed base (_ N).
- Specify an open base Panel Connector if the adjacent panel has an open base (_ 1).
- Specify a Standard Top Cap Panel Connector if the adjacent panel has a Standard Top Cap (S _).
- Specify an open base Panel Connector if the adjacent panel has a Grooved Top Cap (G _).

Specifying Panel Connectors and Covers


Specifying Panel Connectors: Straight Condition

Panel Connectors are available with multiple options to meet your panel applications. Connector types include Standard, Grooved, or Wood Top Cap options for open or closed base raceway panels. Each of these product attributes are embedded in the catalog logic. See example below for specification details.


The example below is using Full-Height Connectors and cover:



NLSS - 48 - SN
S = Standard Top Cap
N = Closed Raceway




NLSS - 48 - S1
S = Standard Top Cap
1 = One or Two Open Raceway(s)




NLSS - 48 - S1
S = Standard Top Cap
1 = One or Two Open Raceway(s)

Catalog Logic:


N = PREMISE
L = Full-Height Connector
S = Straight Condition
S = Steel - (no cover)
48 = 48" high




NLSS - 48 - GN
G = Grooved Top Cap
N = Closed Raceway




NLSS - 48 - G1
G = Grooved Top Cap
1 = One or Two Open Raceway(s)




NLSS - 48 - G1
G = Grooved Top Cap
1 = One or Two Open Raceway(s)



NLSS - 48 - GN
G = Grooved Top Cap
N = Closed Raceway



NLSS - 48 - G1
G = Grooved Top Cap
1 = One or Two Open Raceway(s)



NLSS - 48 - G1
G = Grooved Top Cap
1 = One or Two Open Raceway(s)

Tips

- Specify an open base Panel Connector if any panel in the straight condition has an open base. For one or two open base panels within the straight condition specify as the catalog number suffix - _ 1.
- Specify a Grooved Top Cap Panel Connector if either panel in the straight condition has a Grooved Top Cap - G _.
- For Wood Top Cap Panels in a straight condition refer to the guidelines for Standard Top Cap panels.










Specifying Panel Connectors and Covers

Specifying Panel Connectors: Designing with Standard and Grooved Top Caps in 2-Way, 3-Way, 4-Way Conditions

Panel Connectors are available with multiple options to meet your panel application. Panel types include Standard, Grooved, or Wood Top Cap options for open or closed base raceway panels. Each of these product attributes are embedded in the catalog logic. This logic applies to 2-Way, 3-Way, and 4-Way panel intersections. See the example below for specification details.

The example below is using a Full-Height Connector and cover:

Tip Wood Top Cap option – (W _) is also available; not shown in the example below.

 <p>Standard Top Cap</p> <p>Closed Raceway</p> <p>NL2(_) - 48 - SN S = Standard Top Cap N = Closed Raceway</p>	 <p>Standard Top Cap</p> <p>Open Raceway</p> <p>NL2(_) - 48 - S2 S = Standard Top Cap 2 = Two Open Raceways</p>	 <p>Standard Top Cap</p> <p>Open Raceway</p> <p>Closed Raceway</p> <p>NL2(_) - 48 - S1 S = Standard Top Cap 1 = One Open Raceway</p>
 <p>Grooved Top Cap</p> <p>Closed Raceway</p> <p>NL2(_) - 48 - GN G = Grooved Top Cap N = Closed Raceway</p>	 <p>Grooved Top Cap</p> <p>Open Raceway</p> <p>NL2(_) - 48 - G2 G = Grooved Top Cap 2 = Two Open Raceways</p>	 <p>Grooved Top Cap</p> <p>Open Raceway</p> <p>Closed Raceway</p> <p>NL2(_) - 48 - G1 G = Grooved Top Cap 1 = One Open Raceway</p>
 <p>Standard Top Cap</p> <p>Grooved Top Cap</p> <p>Closed Raceway</p> <p>NL2(_) - 48 - GN G = Grooved Top Cap N = Closed Raceway</p>	 <p>Standard Top Cap</p> <p>Grooved Top Cap</p> <p>Open Raceway</p> <p>NL2(_) - 48 - G2 G = Grooved Top Cap 2 = Two Open Raceways</p>	 <p>Standard Top Cap</p> <p>Grooved Top Cap</p> <p>Open Raceway</p> <p>Closed Raceway</p> <p>NL2(_) - 48 - G1 G = Grooved Top Cap 1 = One Open Raceway</p>

Catalog Logic:

N	=	PREMISE
L	=	Full-Height Connector with Full-Height Cover
2	=	2-Way condition
(_)	=	Surface Option for Vertical Cover
48	=	48" high

- Tips**
- Specify an open base Panel Connector if any panel in the intersection has an open base. The catalog number must reflect the number of open base panels in the intersection.
 - Specify a Grooved Top Cap Panel Connector if any panel in the intersection has a Grooved Top Cap.

Specifying Panel Connectors and Covers

Specifying Panel Connectors: Designing with Wood and Grooved Top Caps in 2-Way, 3-Way, 4-Way Conditions

Panel Connectors are available with multiple options to meet your panel applications. Connector types include Standard, Grooved, or Wood Top Cap options for open or closed base raceway panels. Each of these product attributes are embedded in the catalog logic. This logic applies to 2-Way, 3-Way, and 4-Way panel intersections. See example below for specification details.

The example below is using a Full-Height Connector and Cover:


Tip If the panel intersection has both grooved and wood top caps and you desire Panel Connector with a wood top cap, specify a connector with a wood top cap and separately specify ePart 7036-0202, Top Cap Corner Aligner for Grooved Top Cap; each panel with a wood top cap will require one top cap aligner.

Catalog Logic:


N = Enhanced PREMISE
L = Full-Height
Connector with
Full-Height Cover
2 = 2-Way condition
(_) = Surface Option
for Vertical Cover
48 = 48" high

Catalog Logic:


N = PREMISE
L = Full-Height
Connector with
Full-Height Cover
2 = 2-Way condition
(_) = Surface Option
for Vertical Cover
48 = 48" high

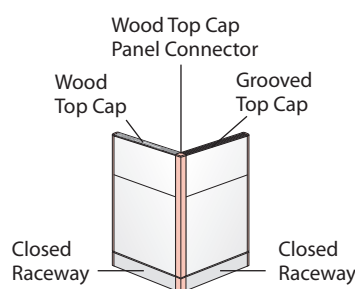

NL2() - 48 - WN
W = Wood Top Cap
N = Closed Raceway




NL2() - 48 - W2
W = Wood Top Cap
2 = Two Open Raceways

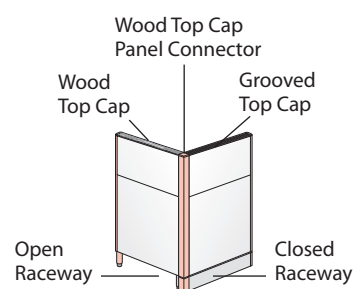


NL2() - 48 - W1
W = Wood Top Cap
1 = One Open Raceway


In addition to the 2-Way Panel Connector, each of the above applications will require one top cap aligner for a Grooved Top Cap, eParts number 7036-0202.

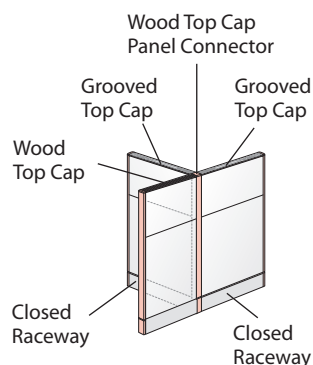

NL3() - 48 - WN
W = Wood Top Cap
N = Closed Raceway

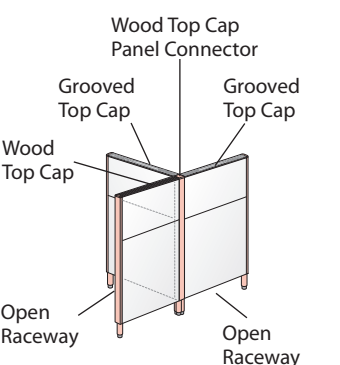

NL3() - 48 - W3
W = Wood Top Cap
3 = Three Open Raceways

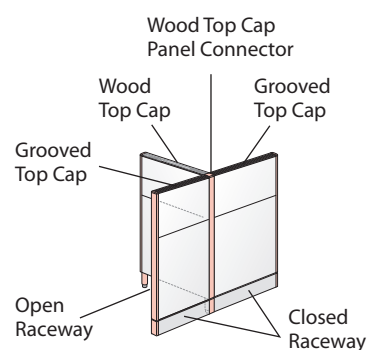

NL3() - 48 - W1
W = Wood Top Cap
1 = One Open Raceway

In addition to the 3-Way Panel Connector, each of the above applications will require two top cap aligners, one for each Grooved Top Cap, eParts number 7036-0202.



- Tips**
- Specify an open base Panel Connector if any panel in the intersection has an open base. The catalog number must reflect the number of open base panels in the intersection.
 - Specify a Grooved Top Cap Panel Connector if any panel in the intersection has a Grooved Top Cap.

Variable-Height Covers

Used when panels of different heights are joined together. They conceal the exposed portion of the panel connector. Variable-Height covers are specified for straight, 2-Way, 3-Way, and 4-Way panel conditions that consist of different height panel configurations. One cover needs to be ordered for each exposed side of the connector within the panel condition.

Full-Height Variable-Height Covers



Offered in heights that support the difference between Monolithic Panel heights: 32" (813mm), 42" (1067mm), 48" (1219mm), 53" (1346mm), 58" (1473mm), 64" (1626mm) and 80" (2032mm). These covers are specified from low to high panel heights.

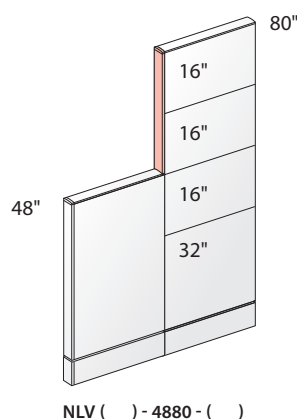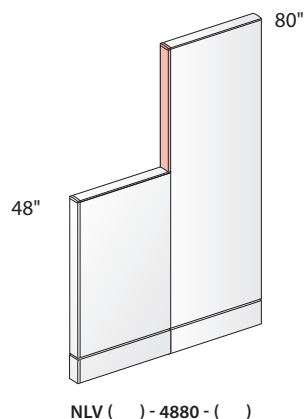

Tip Full-height variable-height and starter Variable-Height Covers are one-piece covers that have a coped edge at the bottom to fit the top cap profile of the lower panel.

Starter Variable-Height Covers

Offered in heights that support an application where one or more of the panel configurations in the application is not a Monolithic Panel height. Specifically, for all panel configurations other than 32" (813mm), 42" (1067mm), 48" (1219mm), 53" (1346mm), 64" (1626mm) and 80" (2032mm)-high. Single covers are specified by calculating the length of the exposed Panel Connector that requires a Variable-Height Cover.

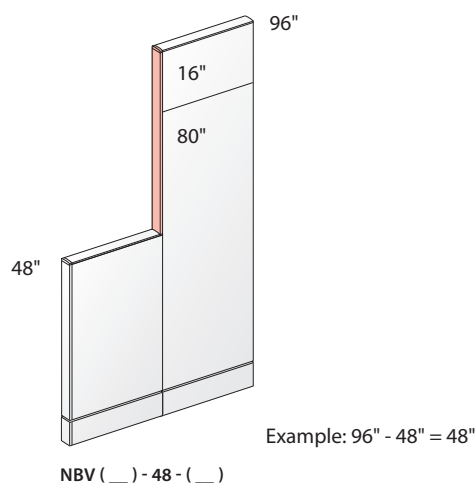
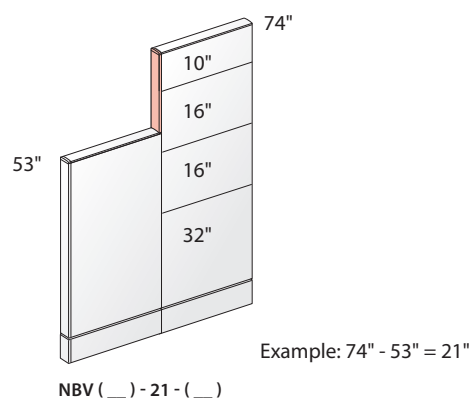


Tip Variable-Height covers with a Grooved Top Cap option (-G) are only needed in a straight panel condition when the tallest panel has a Grooved Top Cap. The lower panel may have a Standard, Grooved, or Wood Top Cap.

Variable-Height Covers



Sectional Variable-Height Covers

Sectional Variable-Height Covers include one or more covers. If it includes more than one cover, the bottom cover has a coped edge to fit the lower profile. Individual sections are 6" (152mm), 10" (254mm) and 16" (406mm). Sectional Variable-Height Covers support the height difference between panel configurations that begin with a 32" (813mm)-high Foundation Element and extend up to 80" (2032mm)-high. These covers provide a true stackable aesthetic by maintaining the horizontal lines created by Upper Structure Elements.

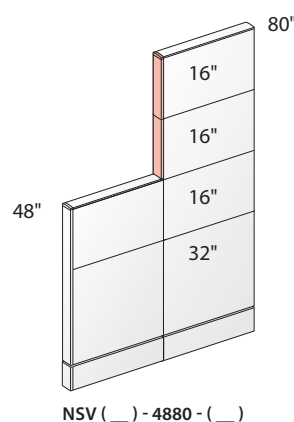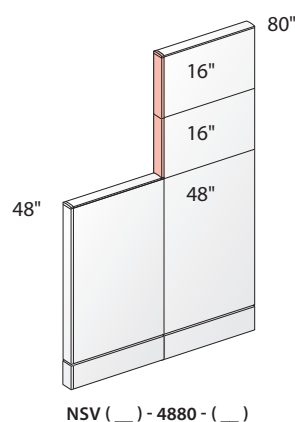

Tip Variable-Height covers with a Grooved Top Cap option (-G) are only needed in a straight panel condition when the tallest panel has a Grooved Top Cap. The lower panel may have a Standard, Grooved, or Wood Top Cap.

If a sectional Variable-Height Cover is specified for a panel configuration that does not start with a 32" (813mm)-high Foundation Element, it is possible the sectional covers will not line up with the horizontal Upper Structure Element lines. This situation usually arises with the use of 42" (1067mm) and 53" (1346mm) Foundation Elements.

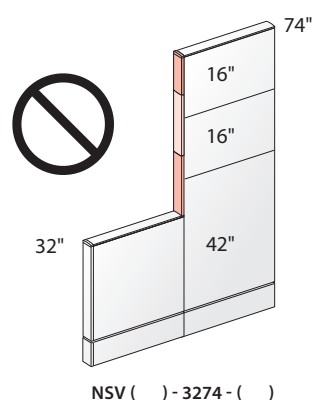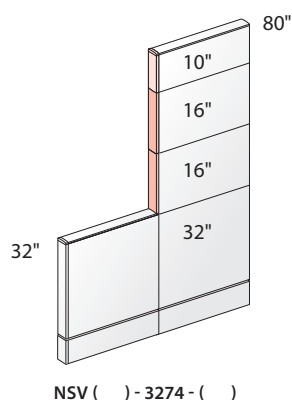


Variable-Height Covers

Extended Variable-Height Covers

One-piece covers, 10" (254mm) or 16" (1626mm)-high, that have a straight edge at the bottom in order to fit the profile of a full, sectional or starter Variable-Height Cover. These covers are always stacked on top of another type of Variable-Height Cover. They can never be used alone because the straight edge at the bottom of the cover does not allow it to be placed on the panel top cap (which has a coped profile). These covers can be stacked on top of each other to achieve the required trim solution.

Extended Variable-Height Covers are used to achieve a finished trim solution for Stackable Panel configurations above 80" (2032mm)-high. They are also used to achieve a stackable aesthetic — by maintaining the horizontal lines created by the Upper Structure Elements - in panel configurations with an overall height which does not match a Monolithic Panel. That is, any configuration other than 32" (813mm), 42" (1067mm), 48" (1219mm), 53" (1346mm), 64" (1626mm) and 80" (2032mm)-high. For this application, extended Variable-Height Covers are used with full, sectional or starter Variable-Height Covers.


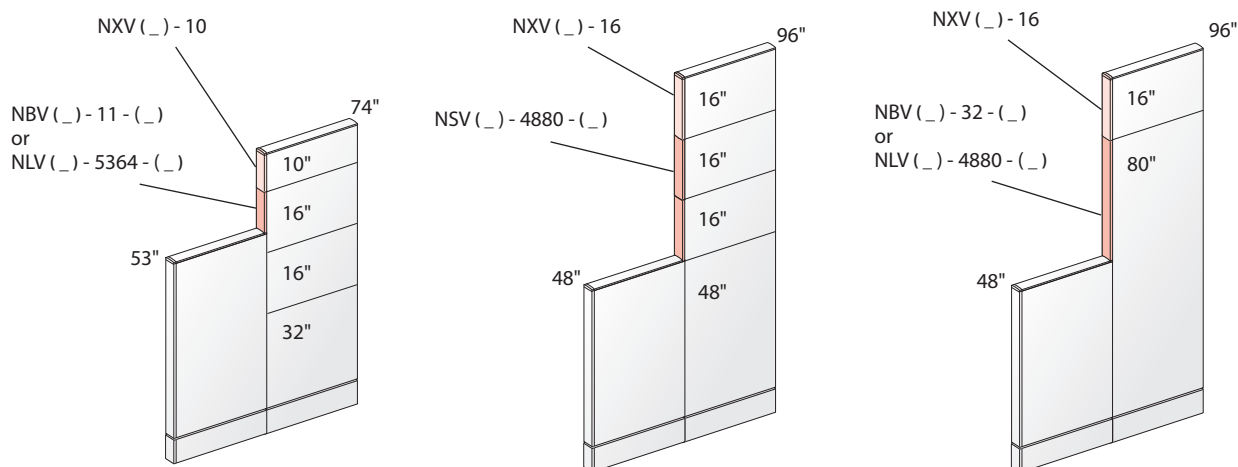


Tip




Unlike other Variable-Height Cover types, extended Variable-Height Covers do not include a top cap trim piece. Since they are always used with another type of Variable-Height Cover, the top cap trim piece from the other cover type is installed on the top of the extended Variable-Height Cover.

Specifying Variable-Height Covers

Separately specified Variable-Height Covers provide a finished appearance in straight, 2-Way, 3-Way, or 4-Way panel intersections with multiple panel heights.

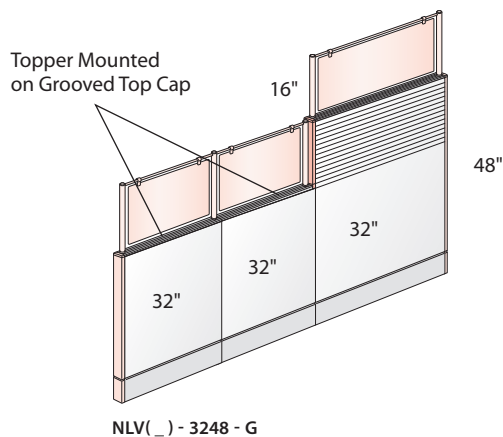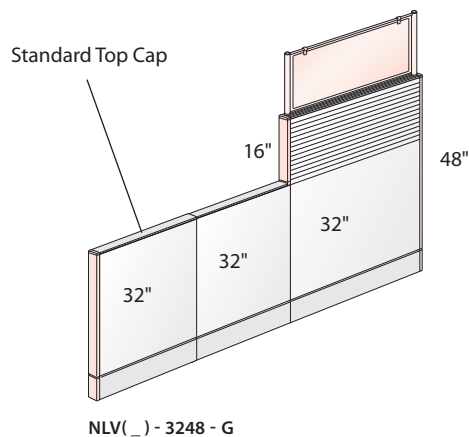

Variable-Height covers with a Grooved Top Cap option (-G) are only needed in a straight panel condition when the tallest panel has a Grooved Top Cap. The lower panel may have a Standard, Grooved, or Wood Top Cap. This is the only application which requires a grooved Variable-Height Cover.

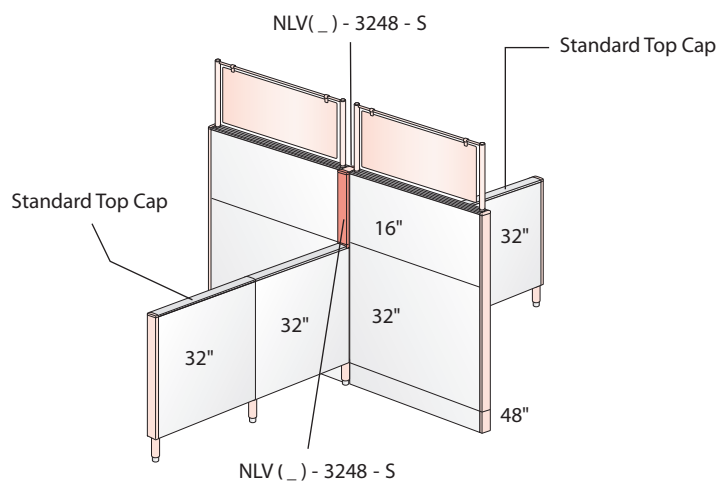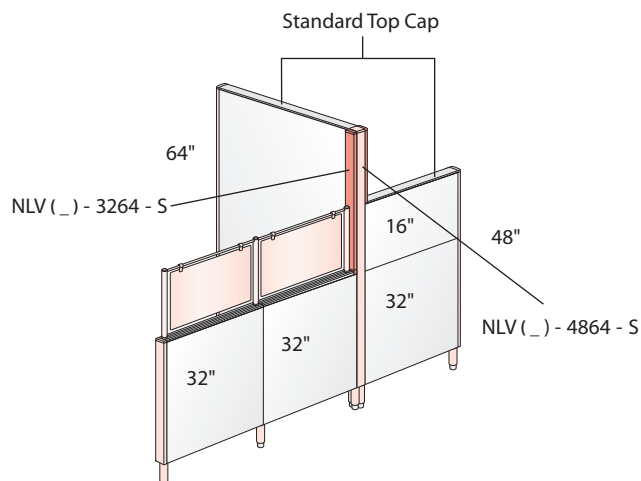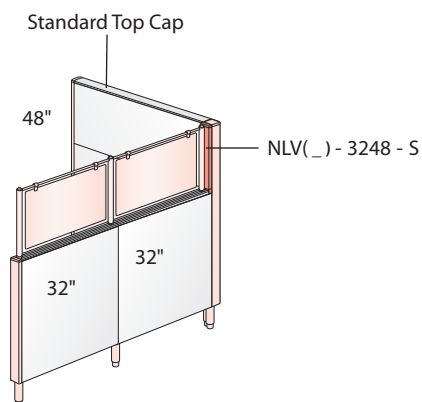

Grooved Variable-Height Covers are never required in 2-Way, 3-Way, or 4-Way panel intersections.

Specifying Connectors


Full-Height Connectors

Universal Rule


The "Universal Rule" requires the Full-Height connector be the same height as the tallest Foundation Element within the panel condition. This is the basic connector rule which applies to straight in-line, 2-Way, 3-Way, 4-Way, and End-of-Run panel conditions. However, there are options to this rule which allow the connector to be taller than the Foundation Element. Refer to Option One and Option Two for application details.

Tip Full-Height Panel Connectors in 2-Way, 3-Way, and end-of-run conditions are available with two vertical cover options: 1) a full-height cover or 2) a pre-configured (sectional) cover.

Straight In-Line Panel Condition:

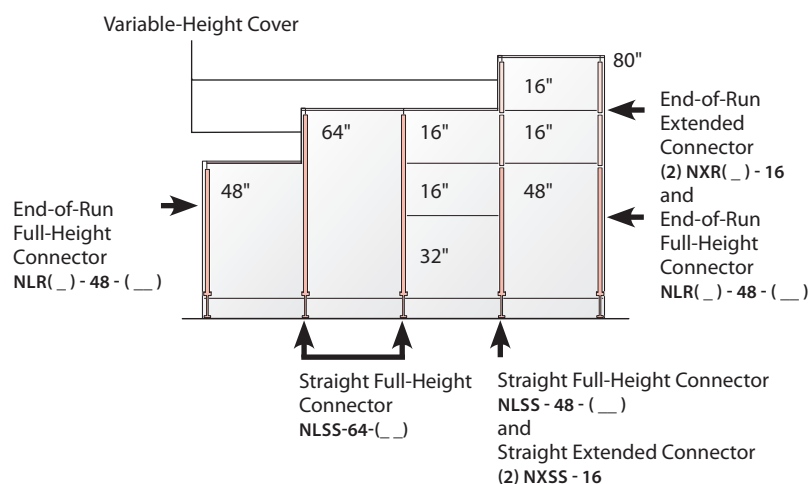


4-Way Panel Conditions:

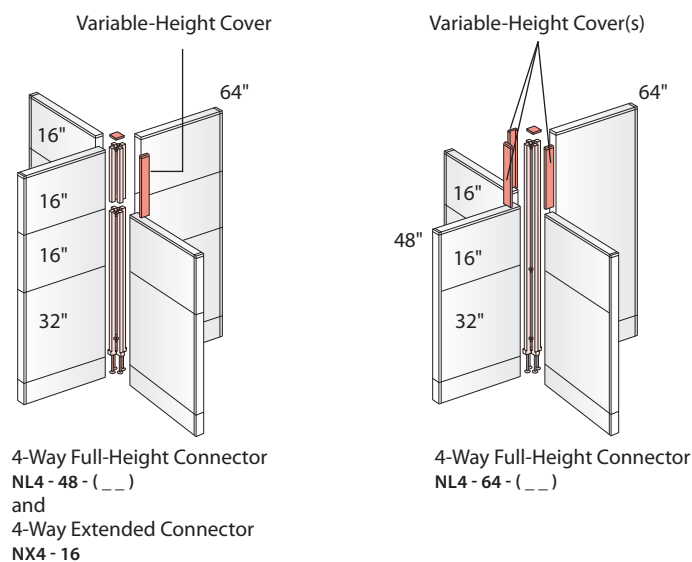


Specifying Connectors


2-Way Panel Conditions



Full-Height Connector with
Full-Height Cover (as shown)
NL2() - 64 - ()
or
Full-Height Connector with
Pre-Configured (Sectional) Cover
NL2() - 64 - ()




Full-Height Connector with
Full-Height Cover
NL2() - 48 - ()
and
Extended Connector with Cover
(as shown)
NX2() - 16
or
Full-Height Connector with
Pre-Configured (Sectional) Cover
NS2() - 48 - ()
and
Extended Connector with Cover
NX2() - 16




Full-Height Connector with
Full-Height Cover
NS2() - 64 - ()
or
Full-Height Connector with
Pre-Configured (Sectional) Cover
NS2() - 64 - ()

3-Way Panel Conditions

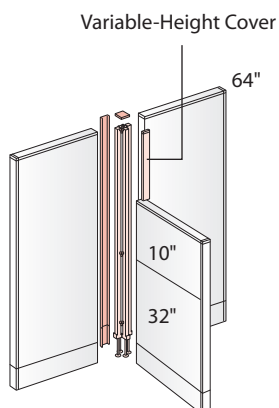

Full-Height Connector with
Full-Height Cover (as shown)
NL3() - 64 - ()
or
Full-Height Connector with
Pre-Configured (Sectional) Cover
NS3() - 64 - ()

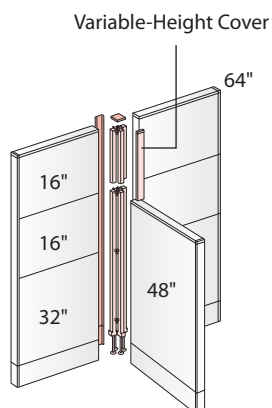

Full-Height Connector with
Full-Height Cover
NL3() - 48 - ()
and
Extended Connector
with Cover (as shown)
NX3() - 16
or
Full-Height Connector with
Pre-Configured (Sectional) Cover
NS3() - 48 - ()
and
Extended Connector with Cover
NX3() - 16

Specifying Connectors


Full-Height Connector Application Options

Option One


As an option to the "Universal Rule" the Full-Height connector may exceed the height of the tallest Foundation Element. The Full-Height connector may be the same height as the tallest panel configuration within the panel intersection.

This option applies to straight in-line, 2-Way, 3-Way, 4-Way, and end-of-run panel conditions. While this connector application is more cost-effective than the "universal rule" it may limit flexibility in future panel reconfigurations.

Straight In-Line and 4-Way Panel Conditions

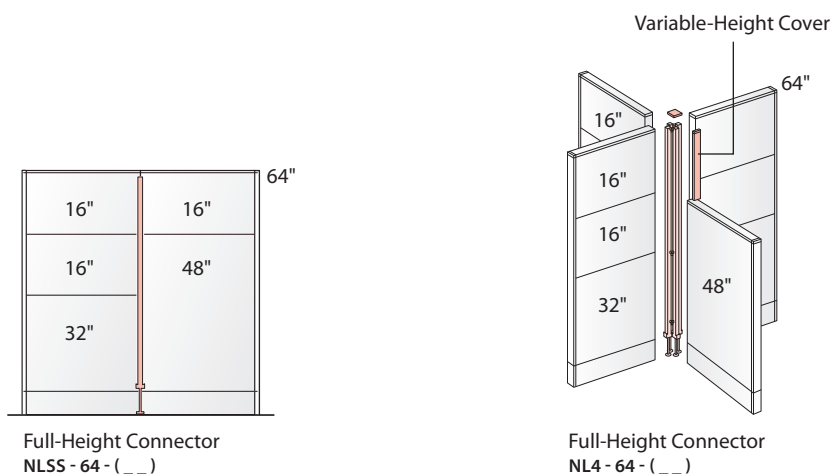

2-Way and 3-Way Panel Conditions

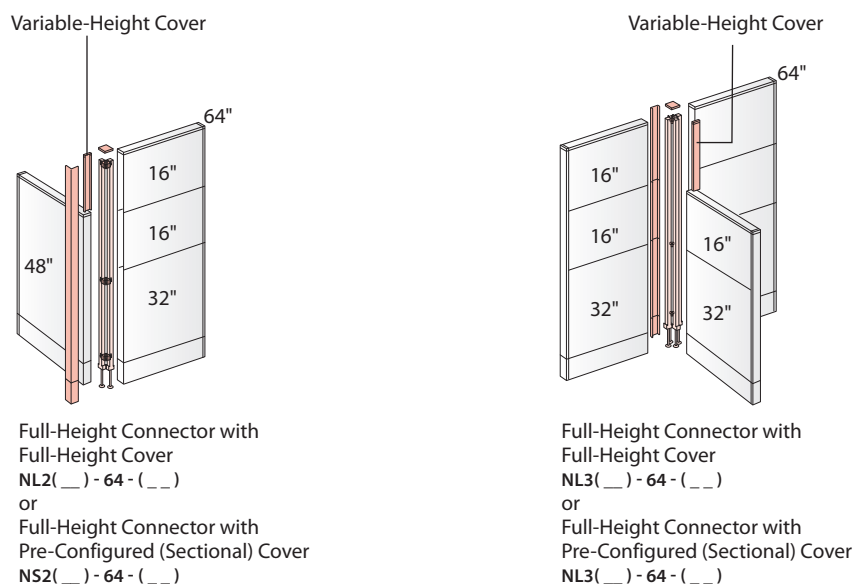


Specifying Connectors

Option Two


As an option to the "Universal Rule" the Full-Height Connector may exceed the height of the tallest Foundation Element. The Full-Height Connector may be the same height as a stack level within the panel configuration in the panel condition.

This option applies to straight in-line, 2-Way, 3-Way, 4-Way, and end-of-run panel conditions. Again, this option is more cost-effective than the "universal rule" but it may limit flexibility in future panel reconfigurations.

Straight In-Line and 4-Way Panel Conditions




Full-Height Connector
NLSS - 48 - (_)
and
Extended Connector
NXSS - 16

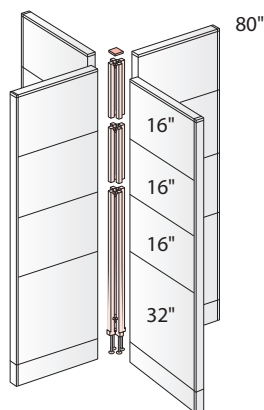


Full-Height Connector
NL4 - 48 - (_)
and
Extended Connector
(2) NX4 - 16

2-Way and 3-Way Panel Conditions



Full-Height Connector with
Pre-Configured (Sectional) Cover
NS2(_) - 48 - (_)
and
Extended Connector with Cover
NX2(_) - 16

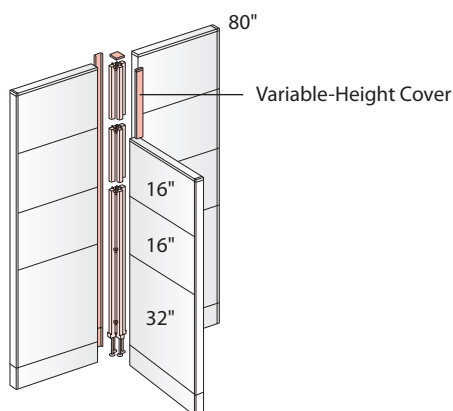

Full-Height Connector with
Pre-Configured (Sectional) Cover
NS3(_) - 48 - (_)
and
Extended Connector with Cover
(2) NX3(_) - 16

Specifying Connectors


Full-Height Connector Application Options

Option Three


The third connector option offers the greatest flexibility available for future panel reconfigurations. This option requires using a 32" high Full-Height Connector with a 32" high Foundation Element and Extended Connectors with Stack Kits. While this application provides you with a truly sectional connector application it is also the most costly.

This connector option applies to straight in-line, 2-Way, 3-Way, 4-Way, and end-of-run panel conditions.

Straight In-Line and 4-Way Panel Conditions




Pre-Configured Connector
(1) NGSS - 64 - (_ _)




Full-Height Connector
NL4 - 32 - (_ _)
and
Extended Connector
(2) NX4 - 16

Note In a straight in-line application, a sectional connector application can be achieved by specifying a single catalog number.

2-Way and 3-Way Panel Conditions



Full-Height Connector with
Full-Height Cover
NL2 (_) - 32 - (_ _)
and
Extended Connector with Cover
(2) NX2 (_) - 16



Full-Height Connector with
Full-Height Cover
NL3 (_) - 32 - (_ _)
and
Extended Connector with Cover
(2) NX3 (_) - 16


Specifying Connectors

Full-Height Connector Application Exceptions


Exception One

When the top of a panel configuration falls anywhere between the top and bottom of a Upper Structure Element within another panel configuration:


- The full-height Panel Connector must be as high as the top of the Upper Structure Element or
- The full-height Panel Connector must be as high as the tallest panel configuration within the panel condition or intersection.

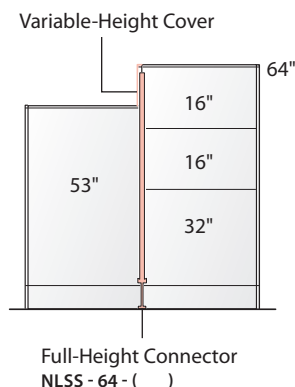


This condition requires a 64" (1626mm)-high Full-Height Connector which matches the height of the tallest panel configuration.

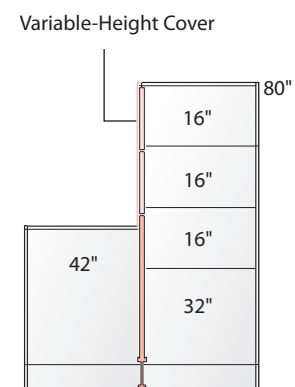


Option One:
Straight Full-Height Connector
NLSS - 48 - (__)
and
Straight Extended Connector
(2) NXSS - 16

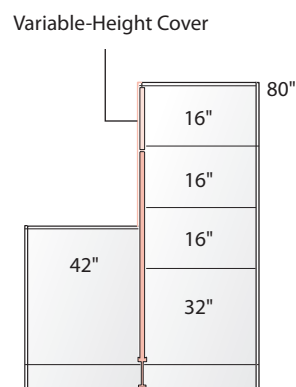

Option Two:
Straight Full-Height Connector
NLSS - 64 - (__)
and
Straight Extended Connector
NXSS - 16

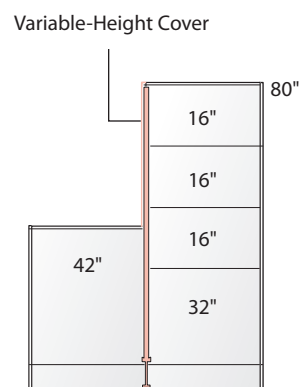

Option Three:
Straight Full-Height Connector
NLSS - 80 - (__)

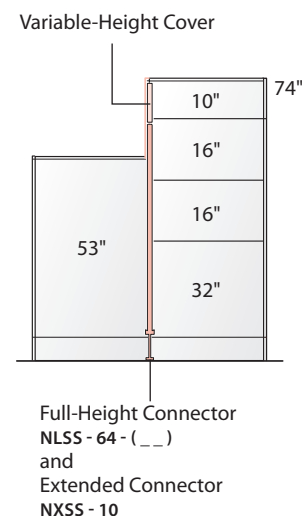

This condition requires a 64" (1626mm)-high full-height straight connector and a 10" (254mm)-high straight extended connector.



This connector exception can occur when using the 42" (1067mm)- high or 53" (1347mm)-high Monolithic Panels.

Specifying Connectors


Full-Height Connector Application Exceptions

Exception Two


In most applications, Upper Structure Elements cannot be used with 42" (1067mm)-high and 53" (1347mm)-high Monolithic Panels unless the panel configurations involved are identical — in other words, all panel configurations within the intersection must be exactly the same. This is because PREMISE panels are based on a 16" (406mm)-high module. Panel Connectors are designed to accept cross bars at specific 16" (406mm) increments within the Foundation Element and upper structure. Possible connection points include:

- Monolithic panels: 32" (813mm), 42" (1067mm), 48" (1219mm), 53" (1346mm), 64" (1626mm), 80" (2032mm)
- Stackable Panel height consisting of a 32" (813mm)-high Foundation Element and 16" (406mm)-high Upper Structure Element(s): 48" (1219mm), 64" (1626mm), 80" (2032mm)
- Stackable Panel height consisting of a 32" (813mm)-high Foundation Element and 16" (406mm)-high Upper Structure Element(s) and one 10" (254mm)-high Upper Structure Element: 58" (1473mm), 74" (1880mm)


Because the 42" (1067mm)-high and 53" (1347mm)-high panels are not based on a 16" (406mm)-high module, the Panel Connectors will not accommodate Upper Structure Elements when these panel heights are used in any intersection with any other panel height configuration (in most applications).



When identical panel configurations are used, you may place Upper Structure Elements on a 42" (1067mm)-high or 53" (1347mm)-high Foundation Element. This application requires a 42" (1067mm)-high full-height straight connector and (2) 16" (406mm)-high extended straight connectors.




The 74" (1880mm) panel configuration is not a height based on the 16" (406mm)-high module. A 64" (1626mm)-high Full-Height Connector is not a valid option because it does not accommodate the top Upper Structure Element. Therefore, this is not a valid panel condition.




Because an 80" (2032mm)-high straight connector accommodates a 74" (1880mm)-high panel configuration (64" high base and 10" high Upper Structure Element), this is a valid application.

Specifying Connectors




This is not a valid application.

- The 64" (1626mm)-high Full-Height Connector does not have a 52" (1397mm)-high connection point.




This is not a valid application.

- The 80" (2032mm)-high full-height connector does not have a 69" (1753mm)-high connection point.




This is not a valid application.

- PREMISE does not offer a 69" (1753mm)-high Full-Height Connector.




This is not a valid application.

- The 80" (2032mm)-high full-height connector does not have a 79" (2007mm)-high connection point.



This is not a valid application.

- The 64" (1626mm)-high full-height connector does not have a 63" (1600mm)-high connection point.



This is not a valid application.

- The 80" (2032mm)-high full-height connector does not have a 68" (1727mm)-high connection point.




Specifying Connectors

Pre-Configured (Sectional) Connectors

A pre-configured (sectional) straight connector can only be used with panel configurations consisting of a 32" (813)-high Foundation Element plus upper structure. The Upper Structure Elements must consist of one of the following:

- (1) 10" (254)-high or 16" (406mm)-high Upper Structure Element
- (2) 16" (406mm)-high Upper Structure Element
- (3) 16" (406mm)-high Upper Structure Element


Straight In-Line Panel Conditions

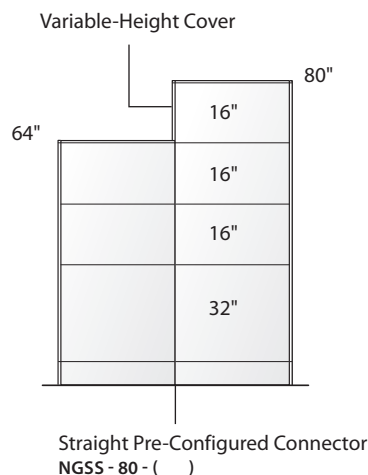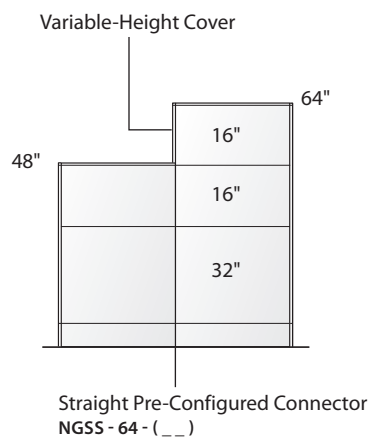


Specifying Connectors

For Sectional Connectors and sectional covers in 2-Way, 3-Way, and end-of-run conditions, specify a mixed connector application.

2-Way and 3-Way Panel Conditions



2-Way Full-Height Connector with Full-Height Cover
 NL2() - 32 - ()
 and
 2-Way Extended Connector with Cover
 NX2() - 10

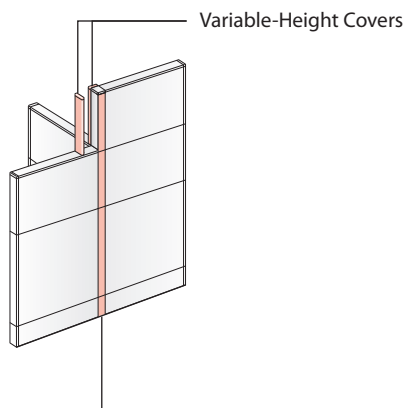

3-Way Full-Height Connector with Full-Height Cover
 NL3() - 32 - ()
 and
 3-Way Extended Connector with Cover
 (2) NX3() - 16





Pre-configured (sectional) 2-Way and 3-Way connectors are not available as a single catalog number.

Specifying Connectors

Sectional Connector Solutions

4-Way Panel and End-of-Run Conditions

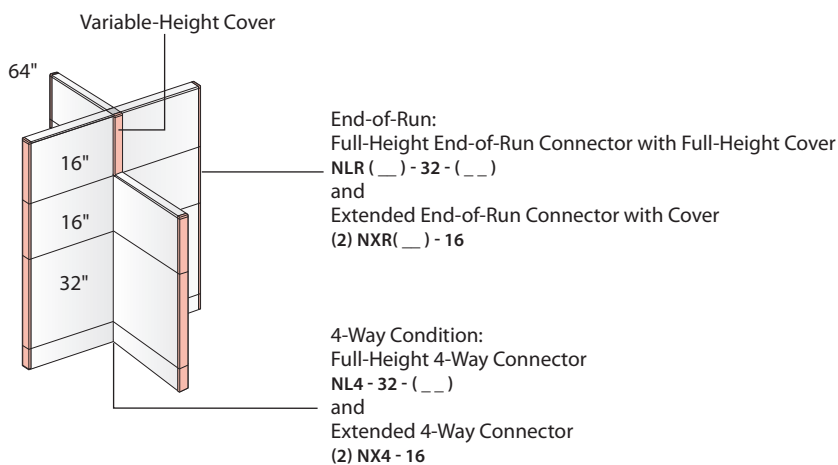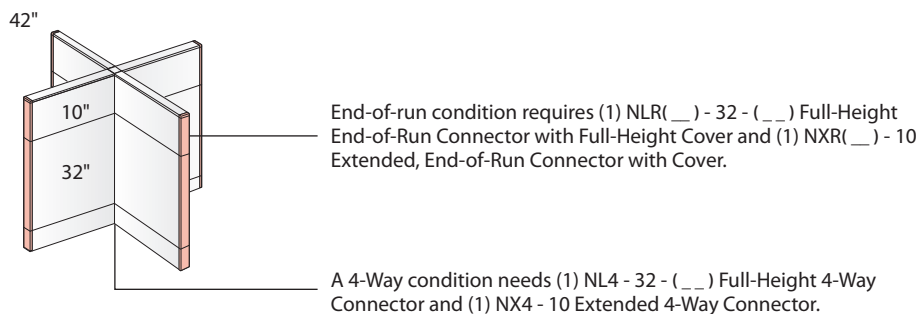


Tip Pre-configured (sectional) 4-Way connectors are not available as a single catalog number.

Specifying Connectors


Extended Connectors

Extended Panel Connectors are used with Upper Structure Elements of 10" (254mm) and 16" (406mm) heights. They are available as straight, 2-Way, 3-Way, and End-of-Run Connectors. The 2-Way, 3-Way, and end-of-run covers match the height of the connector. Extended Connectors are used in two basic panel conditions:


Use when a sectional connector with a sectional cover is desired in a 2-Way, 3-Way and end-of-run panel condition:

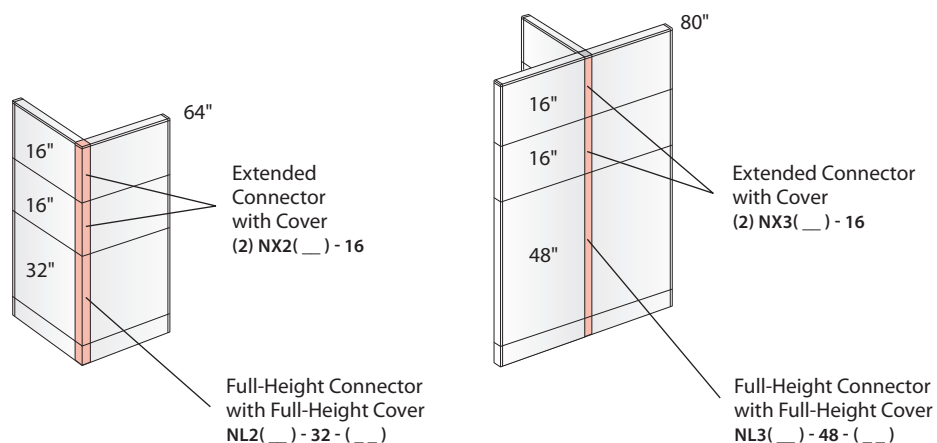


Use when a panel configuration exceeds 80" (2032mm)-high:

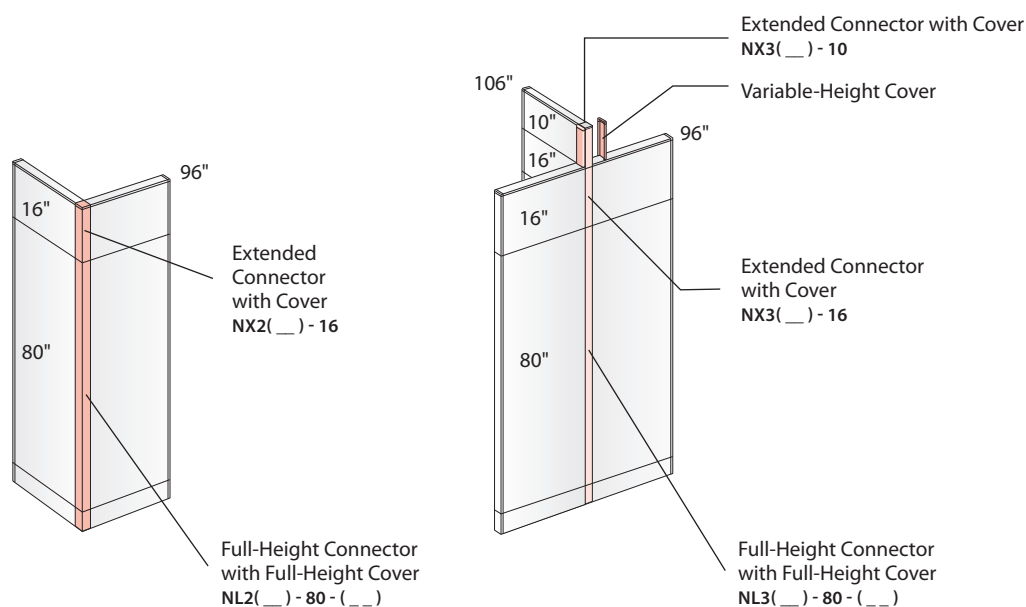

Designing 120° Workspaces



2-Way
120° Connector
(NLA - HEIGHT - S)





3-Way
120° Connector
(NLA - HEIGHT - S)

PREMISE offers dedicated Panel Connectors, worksurfaces and worksurface support brackets designed for 120° workspaces.

120° Panel Connectors are available in six heights: 32", 42", 48", 53", 64", 80". Full-height 120° connectors are available with full-height painted or fabric covers. Top caps are painted.



Specify the appropriate connector option to work with closed or open base raceways, standard or Grooved Top Caps.





120° Panel Connectors

- May be used with Monolithic or Stackable Panel configurations
- Connector height must match the height of the tallest panel within the intersection
- 120° Panel Connectors may not be used with extended Panel Connectors
- Specify Variable-Height Covers for the exposed connector portion(s) which extends above the shorter panel
- Extended Connectors are not for use with 120° applications.

The worksurface shapes shown below are designed for 120° applications. 120° worksurfaces are available in 18", 24", and 30" depths with a laminate or wood surface. Refer to the Price List for details.



Corner, 120° Wrap Around
WUCZ - - - - - N - -



120° Link
WUDZ - - - - - C



- Refer to the Price List for Panel Connector catalog logic for raceway and top cap specification options.
- 120° Link worksurface must be used with a floor support element.
- 120° Application not available for use with floor-to-ceiling.

Designing 120° Workspaces

Application Guidelines



120° worksurface support guidelines:

- Like all PREMISE worksurfaces, the 120° shapes require separately specified worksurface support
- 120° worksurface shapes are not appropriate for use with attached pedestals. Mobile pedestals are recommended for use with 120° worksurfaces


Corner, 120° Wrap Around

The Corner, 120° Wrap Around worksurface may be used with handed cantilever brackets and rear corner brackets. Side Brackets may be used in place of handed cantilevers.

In the application below, the 120° Curved worksurface is supported by handed cantilevers. The Return Panel may be as wide as the worksurface is deep or it may exceed the depth of the worksurface.

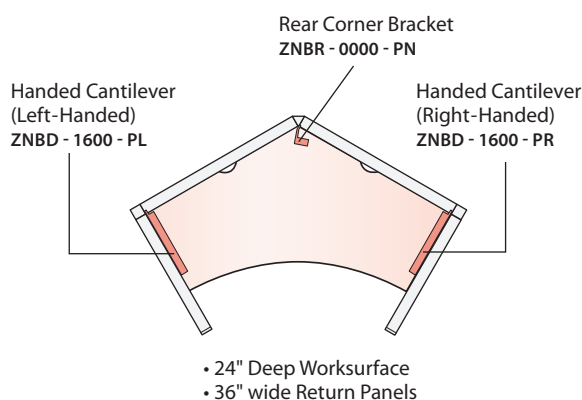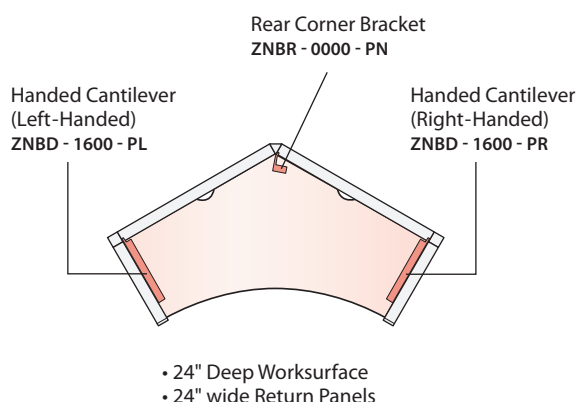

In the application below, the Corner, 120° Wrap Around worksurface is supported by Side Brackets and rear corner brackets. The Return Panel width and the worksurface depth must be the same dimension.

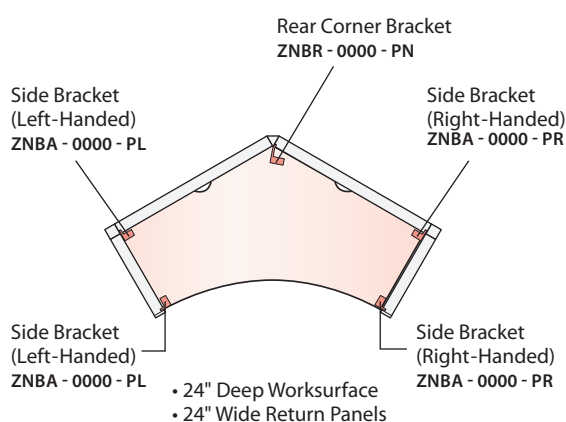

Tip If the Return Panel width and the worksurface depth are the same dimension, use Side Brackets instead of handed cantilevers as a cost savings support option.


Designing 120° Workspaces

Application Guidelines


120° Link Worksurface

The 120° Link worksurface is used as a bridge to join two worksurfaces together. This worksurface must be used with a floor support element such as a Support Column, basic straight leg or Moxie single straight leg with glide to support the front user edge. Use shared cantilevers to attach the back edge of the worksurface to the Panel Connectors.


In the application below, the 120° Link worksurface is supported by Shared Cantilever Brackets and a floor support element.

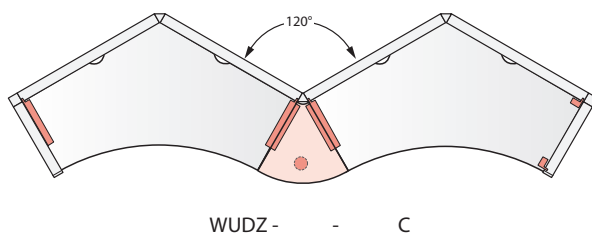


Must Be Used with a Floor Support Element:




Support
Column




Moxie Straight
Leg: with Glide




Straight Leg
Basic



Adjustable
Height Disc Base




Worksurface
Support Panel



Worksurface Support
Leg: Panel Mounted

Putting It All Together

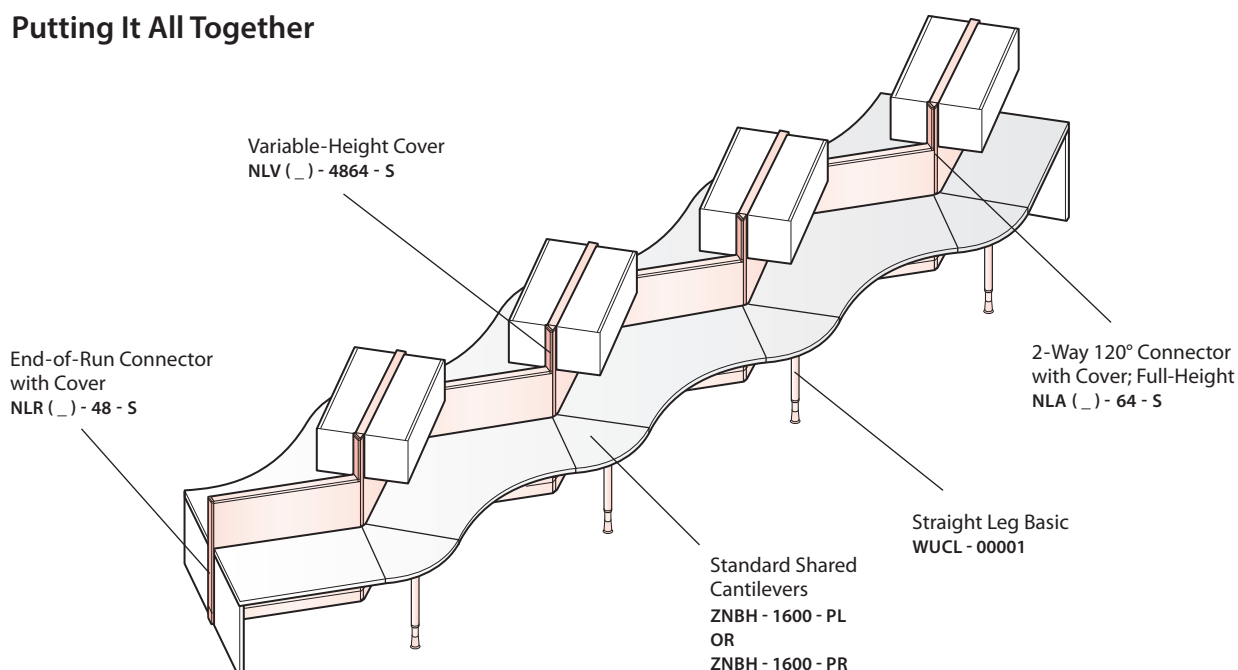


Designing 120° Workspaces

Application Guidelines

Attached pedestals are not recommended for use with 120° workspaces.

- Attached pedestals have an open top. If the pedestal front extends beyond the worksurface edge, the open pedestal top will be exposed
- If the pedestal is shallower than the worksurface depth, the worksurface radius may prohibit full access to the pedestal drawers
- Mobile pedestals are recommended for 120° worksurface.

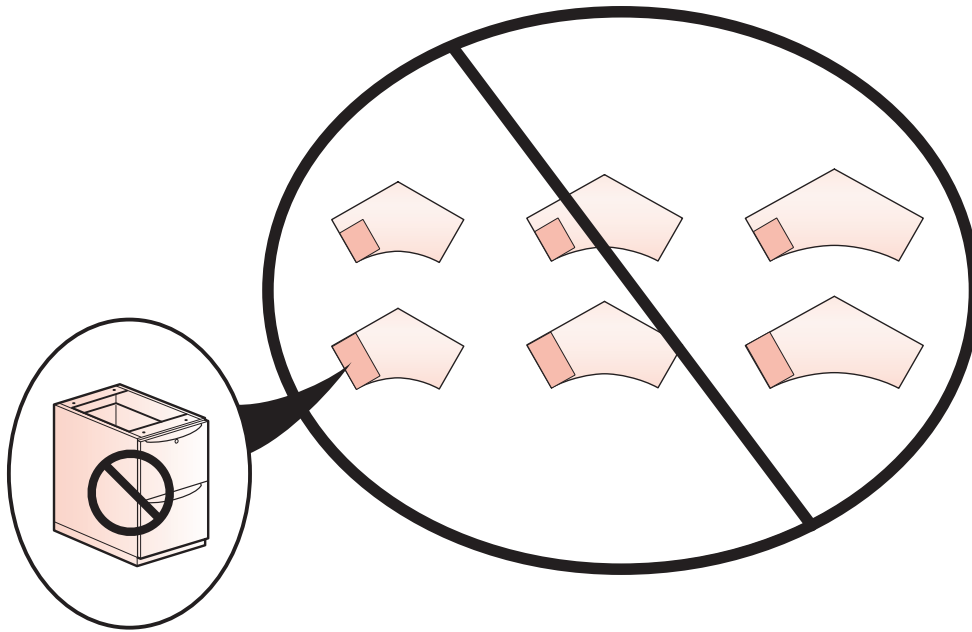


Designing 120° Workspaces


Application Guidelines

120° Workspace Ideas


Layout A

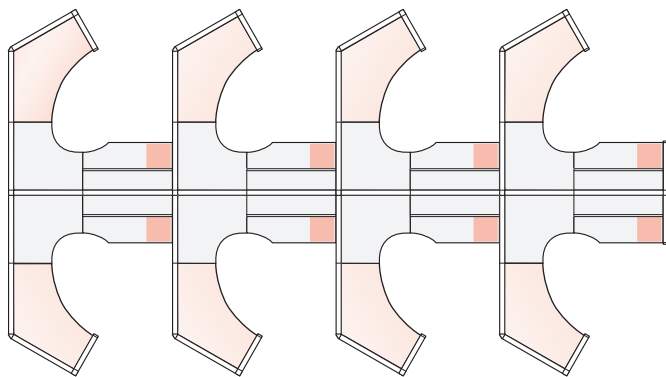

Layout B

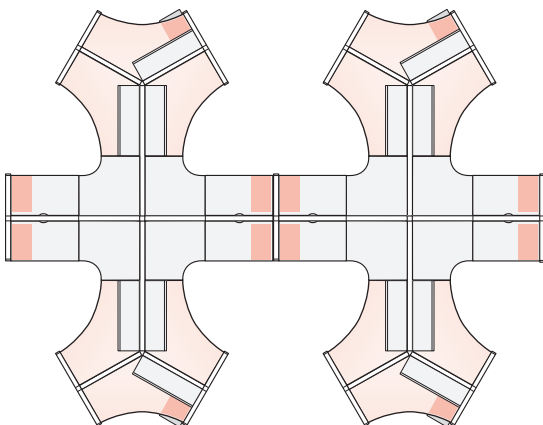

Layout C

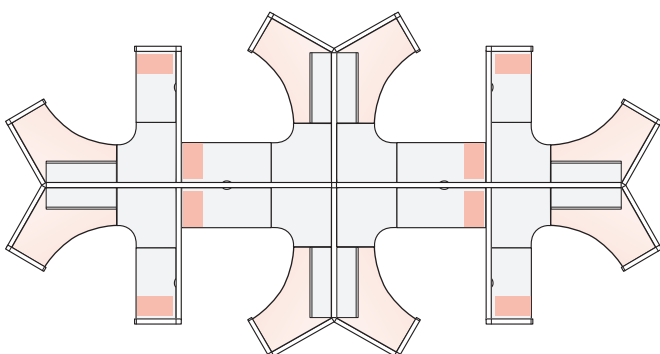


Designing 120° Workspaces


Application Guidelines

120° Workspace Ideas


Layout D

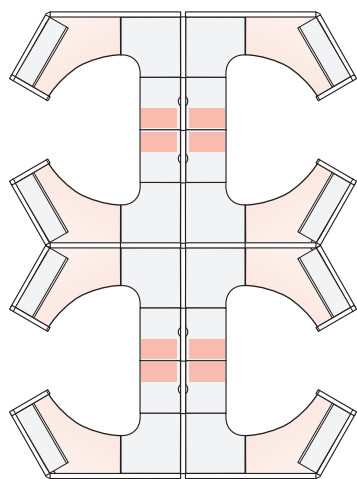

Layout E

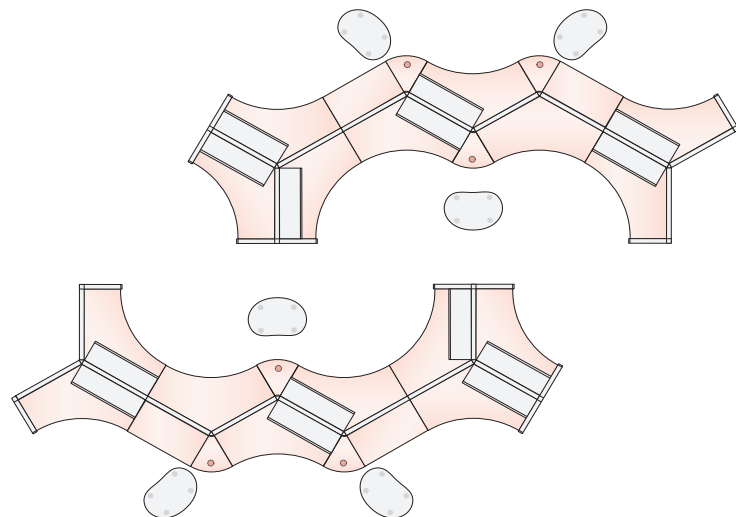

Layout F

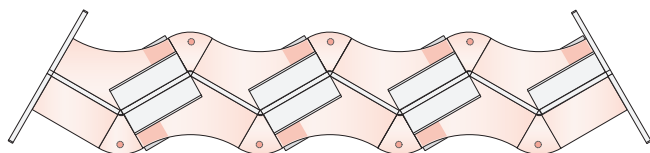

Off-Modular


General Guidelines:

1. Stackable Panels must be used for the Panel Spine when Off-Modular Return Panels are needed. The Foundation Element must be a Super Base Panel with an off-modular pad(s) and with the Grooved Top Cap.
2. Panel Spine must have full-height Panel Connectors. Panel Spine to have a maximum height of 64".
3. Off-Modular T-Mount Kit must be used for Off-Modular Return Panels
4. Return Panels may be Monolithic or Stackable Panel configurations
5. Panels, Spine Wall or Return Panels, in an off modular application may be base raceway or open base panels. Specify the appropriate Off-Modular T-Mount Kit for base raceway and top cap condition within the application.
6. Panel Spine may be powered or non-powered; base and/or beltline
7. Off-Modular Return Panels must be non-powered
8. Refer to application guidelines for unloaded and loaded panel conditions, workstation configuration and worksurface support

1. Stackable Panels must be used for the Panel Spine when Off-Modular Return Panels are needed. The Foundation Element must be a Super Base Panel with an off-modular pad(s) and with the Grooved Top Cap.


Super Base Panel Without Pads: With Grooved Top Cap

Off-Modular Single Pad

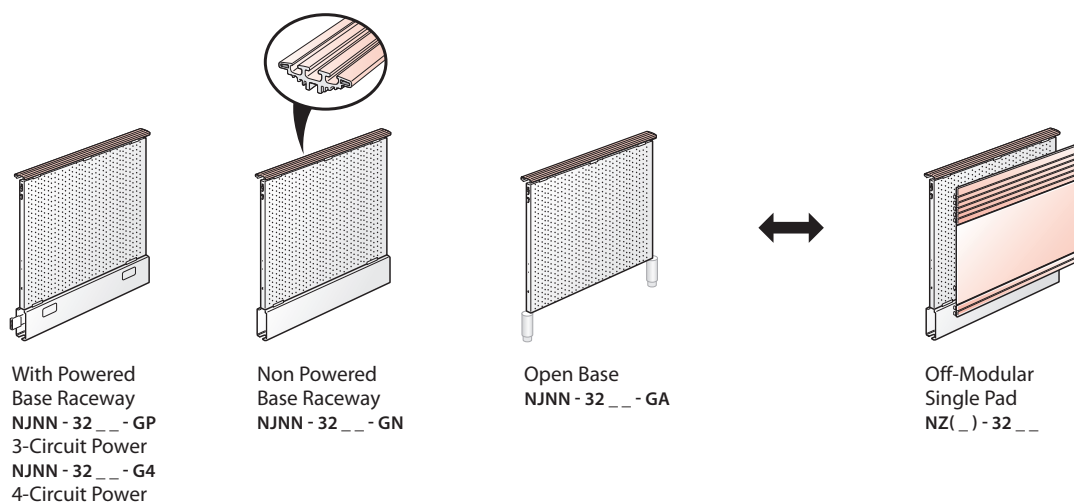

Off-Modular

Off-Modular Single Pad



Off-Modular Single Pad;
NZ (_) - 32 _ _

Off-Modular Single Pad; NZ (_) - 32 _ _

Includes:


- One 16" high pad
- One 7" high rail
- One 2" high rail
- Attachment hardware

16" Pad

- Widths: 24", 30", 36", 42", 48", 60"
- Surface options:
 - Painted (NZIP - 32 _ _)
 - Fabric/Tackable (NZF - 32 _ _)
 - Fabric/Acoustical/Tackable (NZA - 32 _ _)
 - Perforated (NZH - 32 _ _)
 - Translucent (NZX - 32 _ _)
 - Wood (NZW - 32 _ _)

Tips

- Specify Off-Modular pads for each side of the Stackable Panel which requires Off-Modular Return Panels. If only one side of the Panel Spine requires Off-Modular Return Panels specify a standard Super Base pad for the opposite side.
- Standard worksurface support cantilevers may not be used with Off-Modular Super Base Pads.

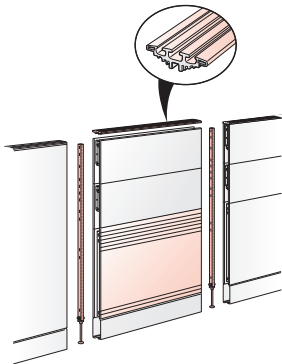


Full-Height Connector with
Grooved Top Cap Functionality
NLSS - (_ _) - G

2. Panel Spine must have Full-Height Panel Connectors. Full-Height Connectors must be specified with Grooved Top Cap functionality. Panel Spine to have a maximum height of 64".

	PANEL HEIGHT	NUMBER
Grooved	32" (813mm)	NLSS - 32 - G
	42" (1067mm)	NLSS - 42 - G
	48" (1219mm)	NLSS - 48 - G
	53" (1346mm)	NLSS - 53 - G
	58" (1473mm)	NLSS - 53 - G
	64" (1626mm)	NLSS - 64 - G


Off-Modular

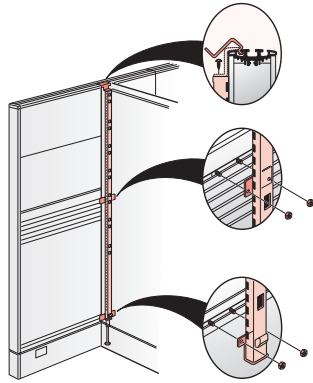

3. Off-Modular T-Mount Kit must be used for Off-Modular Return Panels.

Three points of attachment to the Panel Spine:

- Grooved Top Cap
- Upper Off-Modular Rail
- Lower Off-Modular Rail




Monolithic or
Stackable Panel

4. Return Panels may be Monolithic or Stackable Panel configuration.


- T-Mount kit adds $\frac{5}{16}$ " to the width of the Return Panel
- Provides slots for mounting components

	PANEL HEIGHT	NUMBER
Standard	32" (813mm)	NVSZ - 32 - G
	42" (1067mm)	NVSZ - 42 - G
	48" (1219mm)	NVSZ - 48 - G
	58" (1473mm)	NVSZ - 58 - G
Grooved	64" (1626mm)	NVSZ - 64 - G
	32" (813mm)	NVSZ - 32 - G
	42" (1067mm)	NVSZ - 42 - G
	48" (1219mm)	NVSZ - 48 - G
	58" (1473mm)	NVSZ - 58 - G
	64" (1626mm)	NVSZ - 64 - G


5. Panels, Spine Wall or Return Panels, in an off modular application may be base raceway or open base panels. Specify the appropriate Off-Modular T-Mount connector for base raceway condition within the application.



Panel Spine: With Base Raceway
Return Panel: With Base Raceway
NVSZ - (HEIGHT) - (S OR G) N



Panel Spine: With Base Raceway
Return Panel: Open Base
NVSZ - (HEIGHT) - (S OR G) 1



Panel Spine: Open Base
Return Panel: Open Base
NVSZ - (HEIGHT) - (S OR G) 2

Tips




- Specify "S" if the Return Panel has a Standard Top Cap.
- Specify "G" if the Return Panel has a Grooved Top Cap.

Off-Modular

T-Mount Application Guidelines:


- Return Panel may be the same height as the Panel Spine
- Return Panel may be up to 16" lower than the Panel Spine

Variable-Height Cover

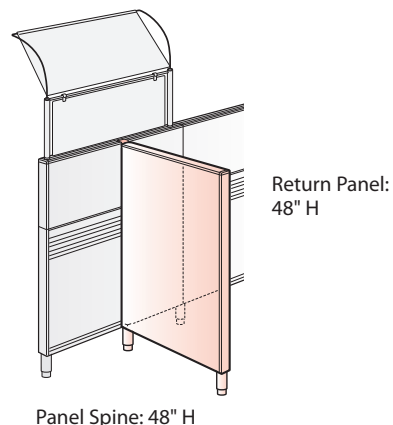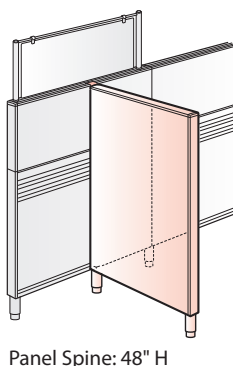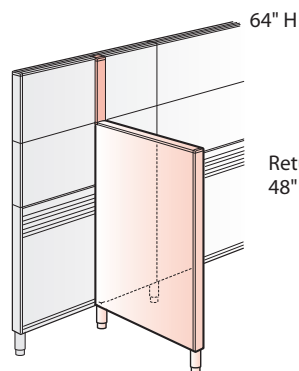


T-Mount Application Guidelines:

- Return Panel may be the same height as the Panel Spine

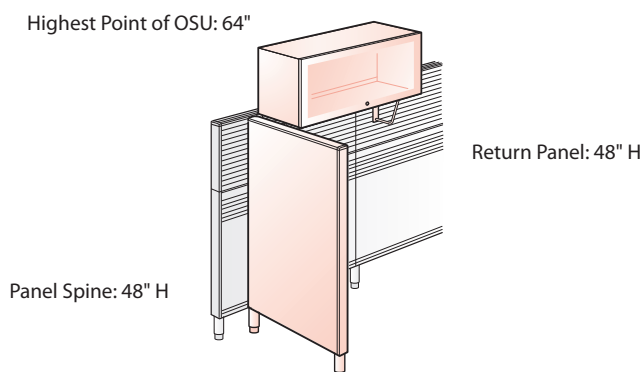


With Up-Mount OSU Return Panel to be same height as Panel Spine.

- Return Panel may not be directly below Up-Mount Off-Modular OSU

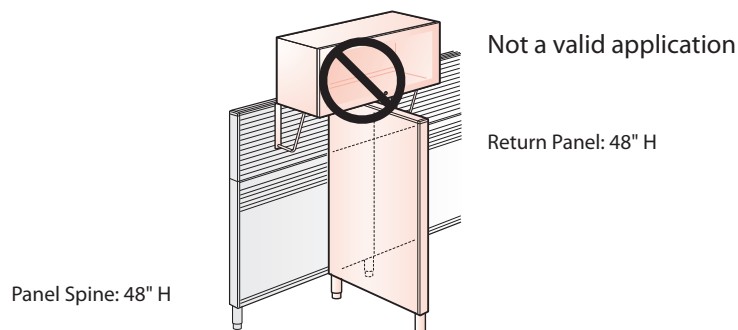


Off-Modular


6. Panel Spine may be powered or non-powered; base and/or beltline

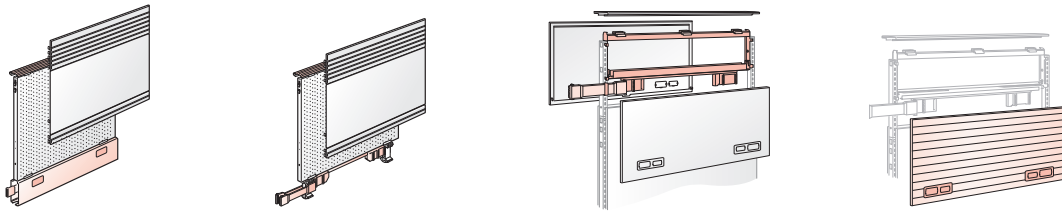

7. Off-Modular Return Panels must be non-powered

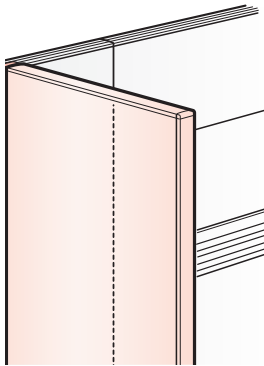

Non-Powered Return Panel



WorkSurface Bracket Guidelines

8. Off-Modular worksurface brackets provide panel mounted worksurfaces horizontal mobility along the Off-Modular Super Base Pad.

ZNBO - 0000 - PN

- Includes one Off-Modular Worksurface Bracket and mounting screws; charcoal finish only
- Must be used with Off-Modular Super Base Pad Attaches one side of the worksurface to the Off-Modular Super Base Pad
- Must be used with additional worksurface support element for required floor support

WIDTH	HEIGHT	NUMBER
3" (76mm)	2 ½" (64mm)	ZNBO - 0000 - PN





Standard worksurface support cantilevers may not be used with Off-Modular Super Base Pads.



Off-Modular

Off-Modular Unloaded Panel Condition Guidelines

8.1 The distance between unloaded Return Panels must not exceed 12'0".

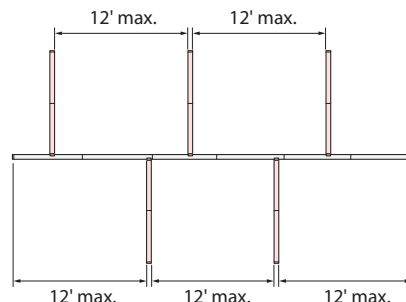
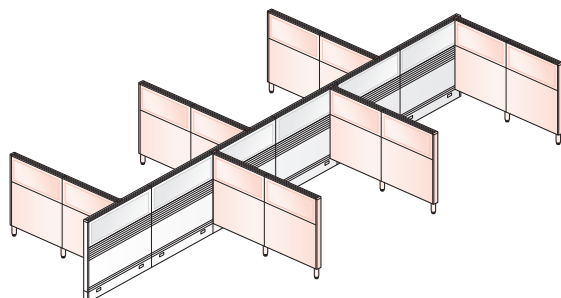


8.2 An unloaded unsupported Return Panel may be up to 8'0" perpendicular to the Panel Spine.

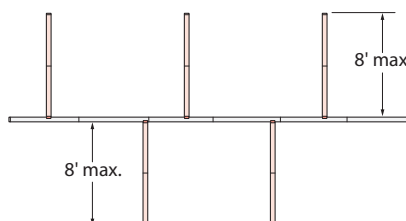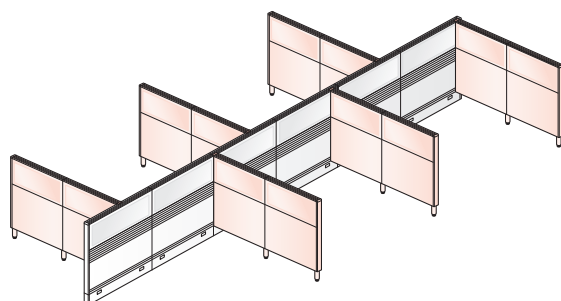

Off-Modular Loaded Panel Spine Guidelines


8.3 The distance between unloaded Return Panels on a loaded Panel Spine must not exceed 8'0".

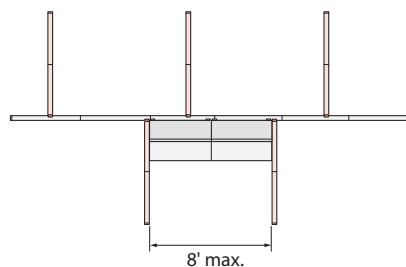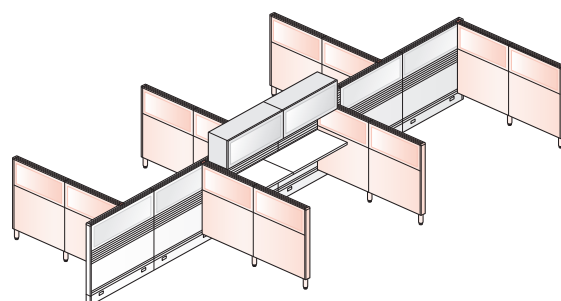


Off-Modular

Off-Modular Loaded Return Panel Guidelines

8.4 The distance between the contact points of a loaded Panel Spine may not exceed 12'0".

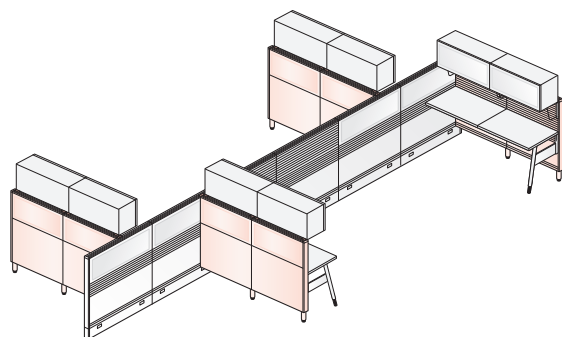

12'0" max loaded. Off-Modular WS Bracket to Off-Modular T-Mount Bracket

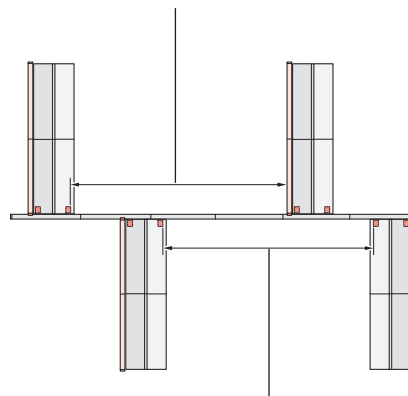


12'0" max loaded. Off-Modular WS Bracket to Off-Modular WS Bracket

Note Panel Spine becomes loaded if a worksurface edge greater than 30" is supported from spine.


Off-Modular Length of Run Guidelines

8.5 Length of Return Panel runs will be off-set by 5/16" when using 2-Way, 3-Way, or 4-Way Panel Connectors and off-modular T-Mount Kits from the Panel Spine

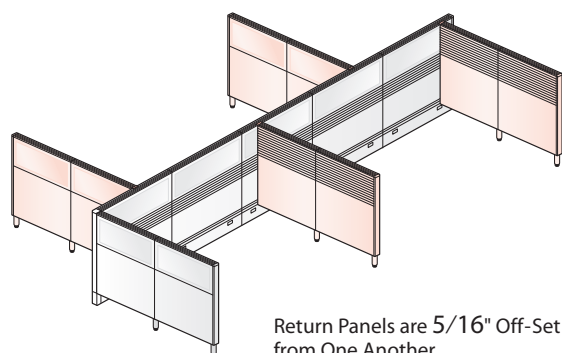

Return Panels are 5/16" Off-Set from One Another

T-Mount Bracket Adds 5/16" to Length of Return Panel

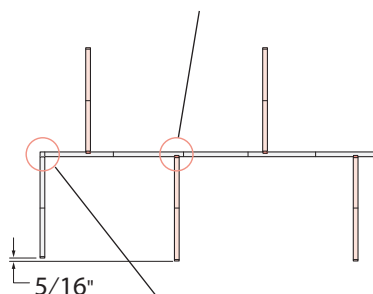

2-Way, 3-Way, 4-Way Panel Connectors Do Not Add Length to Return Panels


Off-Modular

Off-Modular T-Mount Guidelines

- 8.6 Off-Modular T-Mount Kit adds dimension to the overall length of Return Panels. May result in worksurface misalignment in some applications. See below for details.


2-Way Connector does not add dimension to overall length of Return Panels.

Not a recommended off-modular worksurface application. If panel mounted worksurfaces are tied together in a "U Shaped" configuration avoid mixing 2-Way, 3-Way, and 4-Way connectors with Off-Modular T-Mount Kits. May result in worksurface misalignment.

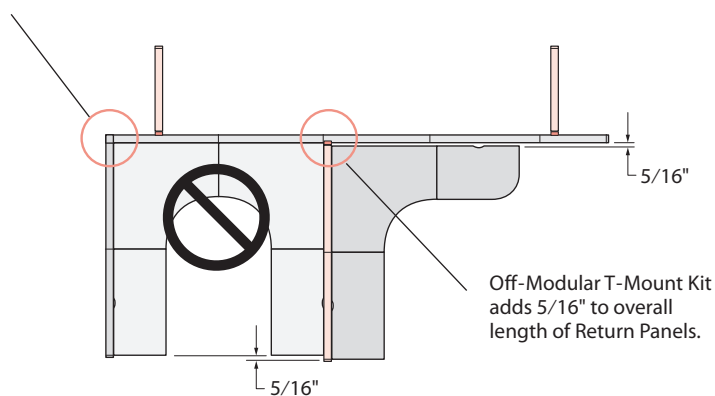

Return Panels are $\frac{5}{16}$ " off-set from one another

- 8.7 Off-Modular T-Mount Kit adds dimension to the overall length of Return Panels. Mixing 2-Way, 3-Way, 4-Way connectors with Off-Modular T-Mounts Kits is not a recommended application when used with a U-Shaped panel mounted worksurface configuration. See below for details.

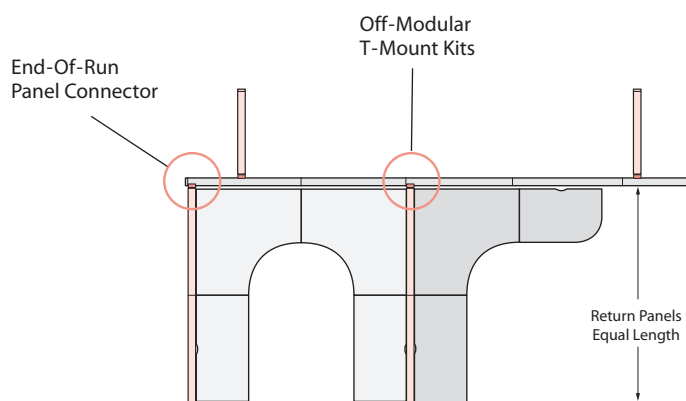


Return Panels are Same Length

Note Worksurfaces will align when using Off-Modular T-Mount Kits for all Return Panels.


Off-Modular

Off-Modular Worksurface Bracket Guidelines

8.8 Two Off-Modular Worksurface Brackets are required for worksurfaces up to 60" wide. Worksurfaces 60" and wider require three brackets.

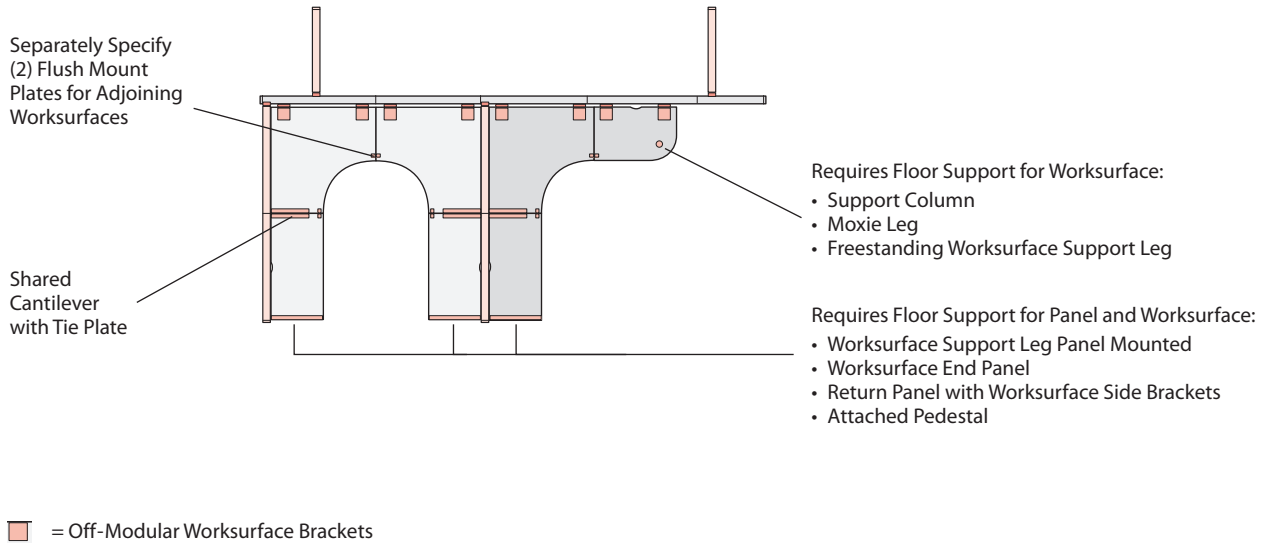


8.9 A worksurface may not be supported by only Flush Mount Brackets and Off-Modular Worksurface Brackets

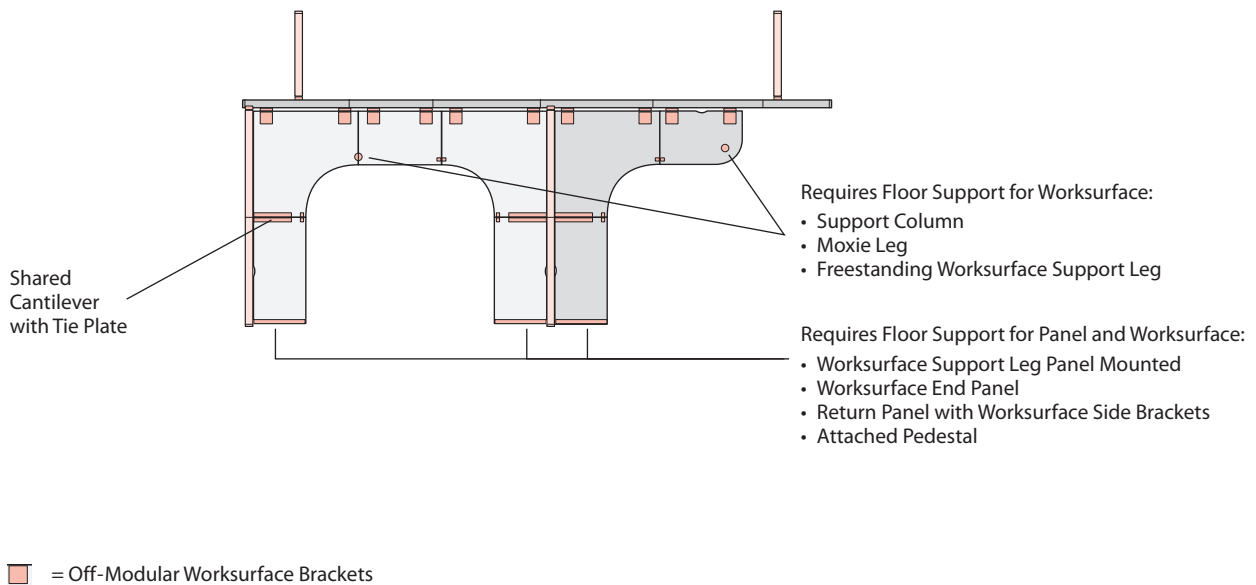

Off-Modular

8.10 An Off-Modular worksurface requires floor support at outer exposed front corners in addition to the Off-Modular Worksurface Brackets.

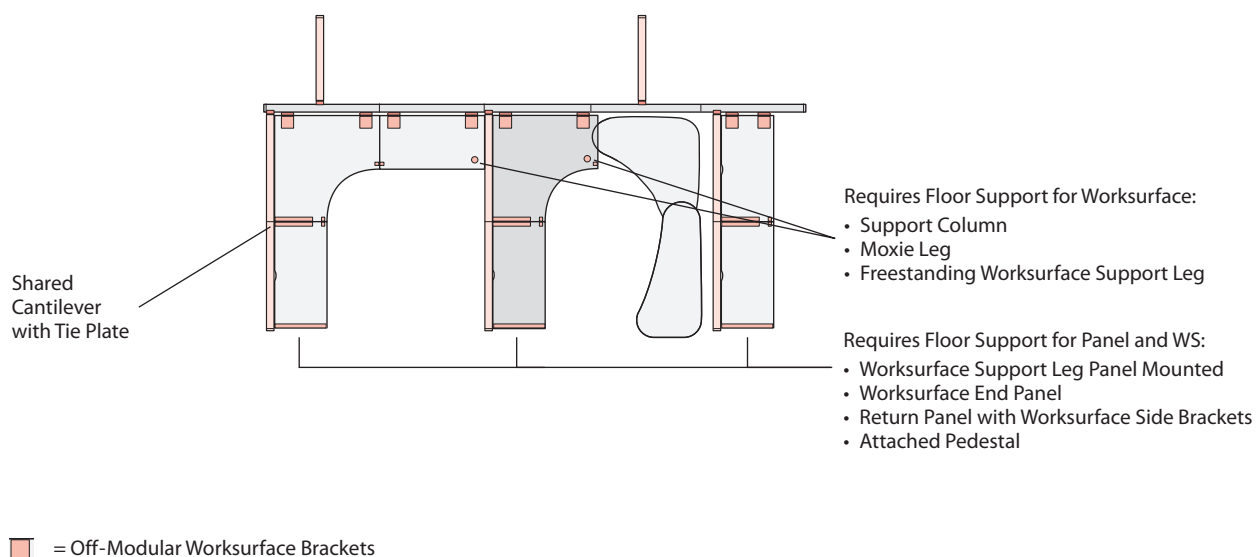


Floor-to-Ceiling (FTC) Connectors

A FTC application provides an enclosed office environment. This is accomplished by using PREMISE's 24" (610mm)-high FTC connectors, ceiling track and pad sets. The FTC elements can be installed on an 80" (2032mm)-high Monolithic Panel or on a panel configuration with 16" (406mm)-high Upper Structure Elements.

Vertical 24" (610mm)-high FTC components include straight in-line, 2-Way, 3-Way, and End-of-Run Connectors. A FTC Variable-Height Cover is needed to finish the exposed portion of a 24" (610mm)-high connector when used with unequal heights. FTC wall mount kits are available to attach FTC pad sets to a structural building wall. This wall mount kit should be used in conjunction with an 80" (2032mm)-high wall mount kit for the lower portion of the panel configuration.

FTC track, which provides a finished appearance at the ceiling and supports the top of the pad sets, must be specified separately.


2-Way, 3-Way, and 4-Way FTC connectors include a pre-assembled section of ceiling track. If an FTC application is used in conjunction with lower panel heights in 2-Way, 3-Way, or 4-Way conditions, the pre-assembled portion of the ceiling track will need to be field-modified for installation.

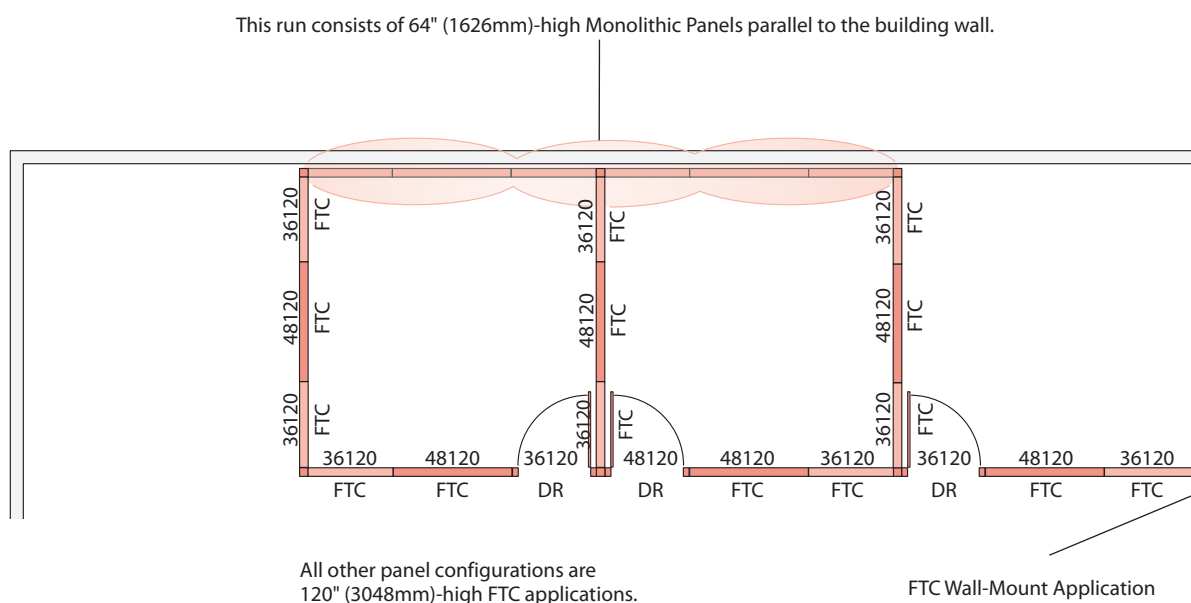

FTC applications should not exceed 120" (3048mm)-high. Customer needs to supply glazing material.

Floor-to-Ceiling (FTC) Connectors

Floor-to-Ceiling Application: Product Specification

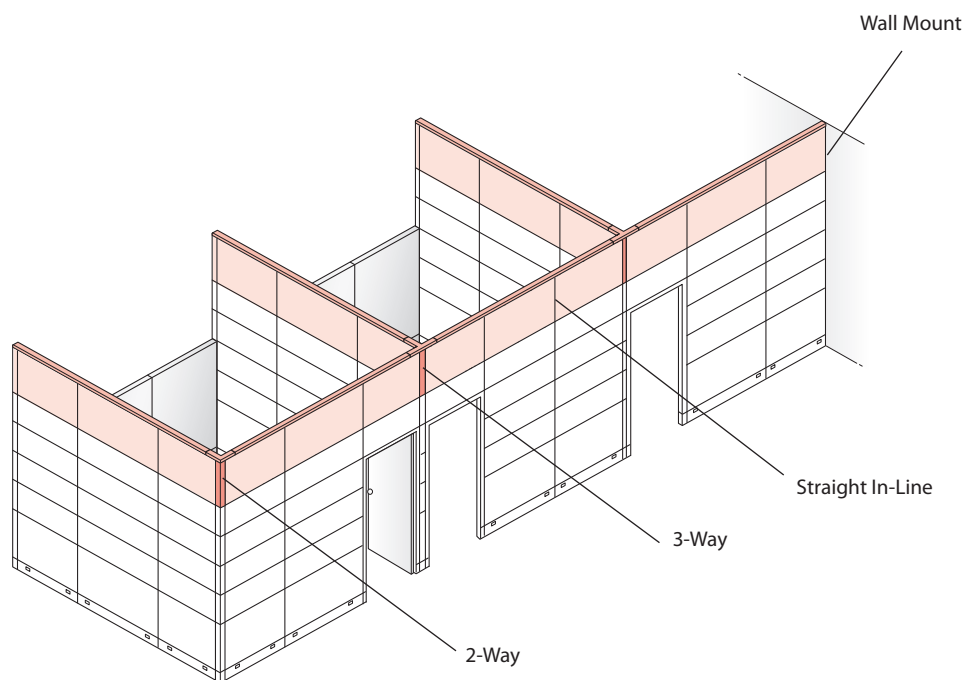

Straight In-Line:

FTC straight connector NQS - S. Required for all panel-to-panel in-line conditions.

2-Way:

FTC 2-Way connector with cover NQ2 (__) - 24.

3-Way:

FTC 3-Way connector with cover NQ3 (__) - 24.

Wall Mount:


FTC wall mount kit NQSW - 40. Mounts Upper Structure Elements above 80" (2032mm)-high.

Track:


FTC track NQRC - 10 must be specified for all ceiling pads. It is available in 10' (3048mm) sections. When calculating FTC track quantities, be aware of the location of seams. Order additional track as needed to minimize seams.

Floor-to-Ceiling (FTC) Connectors


Floor-to-Ceiling Application: Product Specification

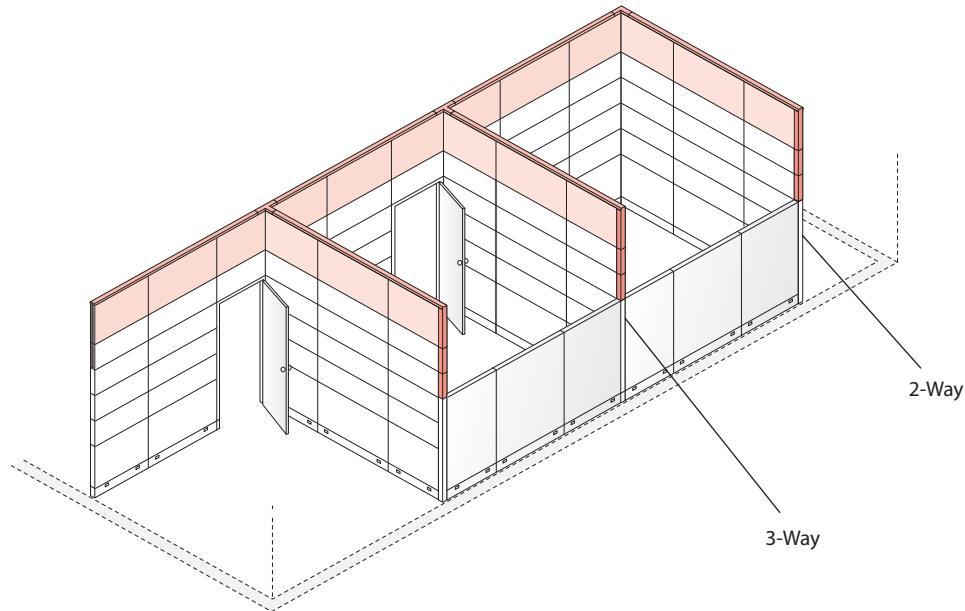


2-Way Application

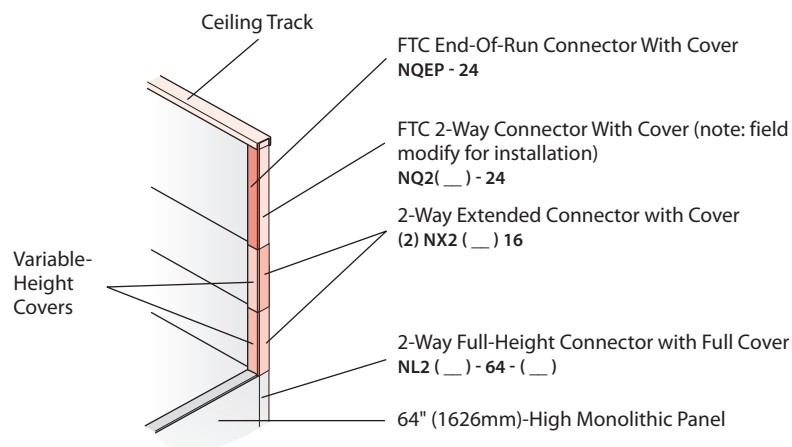

3-Way Application

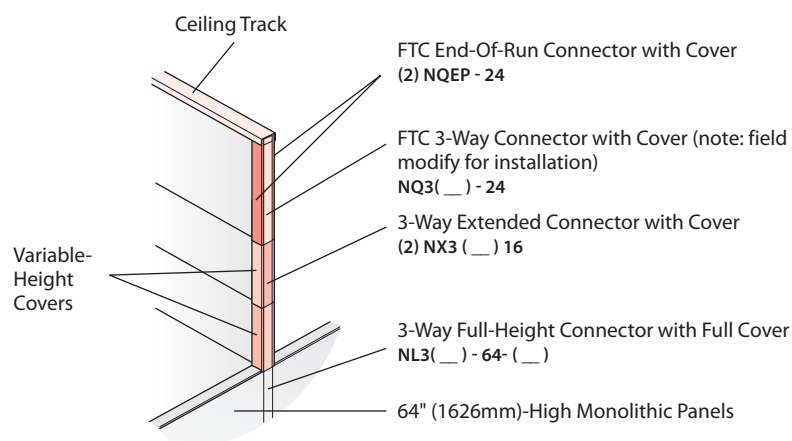

Floor-to-Ceiling Applications

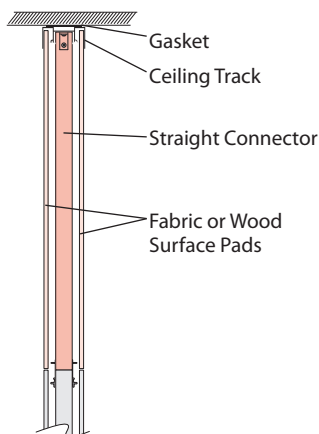


FTC Pad Set

PREMISE floor-to-ceiling (FTC) pad sets accommodate ceiling heights up to 10' (3048mm). This is a custom-fit product and may require modification of the floor-to-ceiling components for ceiling applications less than 10'. The ceiling track is not secured to the ceiling material, thereby eliminating the need to find ceiling attachment locations.

Pad/Open Frame Dimensions

HEIGHT:	WIDTHS:
24" (610mm)	18" (457mm)
	24" (610mm)
	30" (762mm)
	36" (914mm)
	42" (1067mm)
	48" (1219mm)
	60" (1524mm)

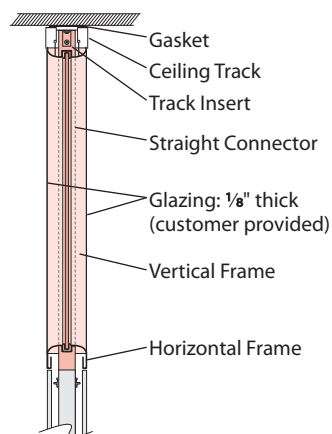


FTC Glass Framework

Glazing Size Requirements

PANEL WIDTH:	GLAZING WIDTH:
18" (457mm)	17.58" (447mm)
24" (610mm)	23.58" (599mm)
30" (762mm)	29.58" (751mm)
36" (914mm)	35.58" (904mm)
42" (1067mm)	41.58" (1056mm)
48" (1219mm)	47.58" (1209mm)
60" (1524mm)	59.58" (1513mm)

Glazing height based on actual ceiling height
 Glazing thickness = 1/8" (3mm)
 Maximum thickness = 0.130" (3.3mm)
 Minimum thickness = 0.115" (2.9mm)

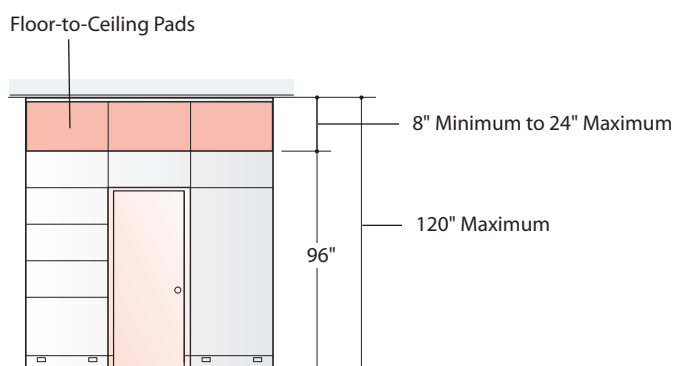

Tips

- FTC connectors are required at every panel-to-panel connection point.
- When specifying FTC applications, consult local building and fire codes.
- Identify ceiling-mounted obstacles (i.e., sprinkler heads, light fixtures, etc.) and adjust the product layout if necessary.
- Identify lighting and HVAC fixture locations, taking into consideration the floor-to-ceiling barrier created by the product.

Note


An 8" open frame pad with glazing will provide approximately 2" of viewing space.

Door Assemblies

Door Placement


A door may be placed a maximum of 24" (610mm) from the 90° supporting panels. The hinged side of the door should be toward the supporting panels.

Left-Hand Door Swing

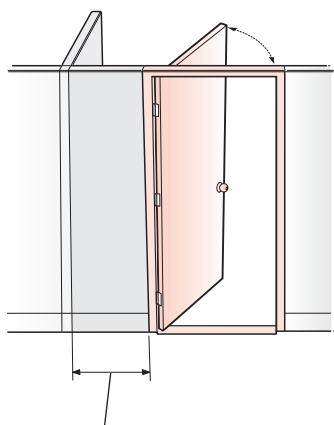


24" (610mm) Maximum Panel Width

Right-Hand Door Swing

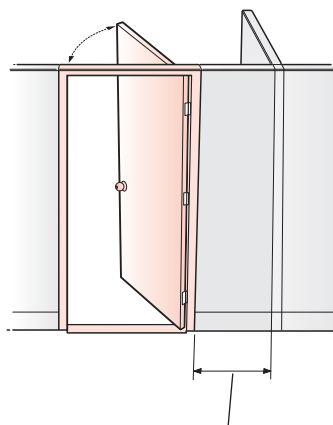


24" (610mm) Maximum Panel Width

Note Panel runs with doors and glazed panels cannot exceed 10' (3048mm).

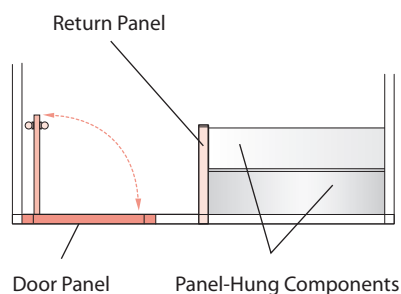

When a panel run with door is supporting a work surface and/or other panel hung components, specify a work surface-depth Return Panel or a work surface end panel, or a fixed pedestal at the end of the work surface. The Return Panel can be attached to the panel run conventionally or with a T-Mount kit.




A pair of single doors can also be set back from the panel run. This configuration requires the installation of a 24" (610mm) Return Panel between the doors.


Tips

- For a 12' (3658mm) conference room, T-Mount panel next to door.
- Most building codes for new buildings require a minimum clearance door width of 32" (814mm). To meet this requirement, the 42" (1067mm)-wide door must be ordered. Consult local building code for clearance height requirements.


Wing Walls



A



B




E



Full-Height One-Piece Wing Wall

PREMISE Full-Height One-Piece Wing Walls are an economical alternative to Return Panels at the end of a panel run.

- A. Full-Height One-Piece Wing Walls can be the same height or lower than the Panel Spine.
- B. Full-Height One-Piece Wing Walls can be the same width or wider than the worksurface depth.
- C. Full-Height One-Piece Wing Walls are pre-drilled and include worksurface L-brackets.
- D. Separately specify worksurface support for the worksurface ends opposite the Wing Walls. Attached pedestal and a corner bracket provide the required worksurface support in this balanced application.
- E. L-brackets support one side/end of a worksurface up to 30" (762mm) wide/deep. Widths/depths greater than 30" (762mm) require field drilling for worksurface support.
- F. Wall-to-panel attachment brackets are included for left-handed and right-handed applications. For center-mounted applications, separately specify the attachment brackets.
- G. Separately specify End-of-Run Panel Connectors and Covers for panel applications.

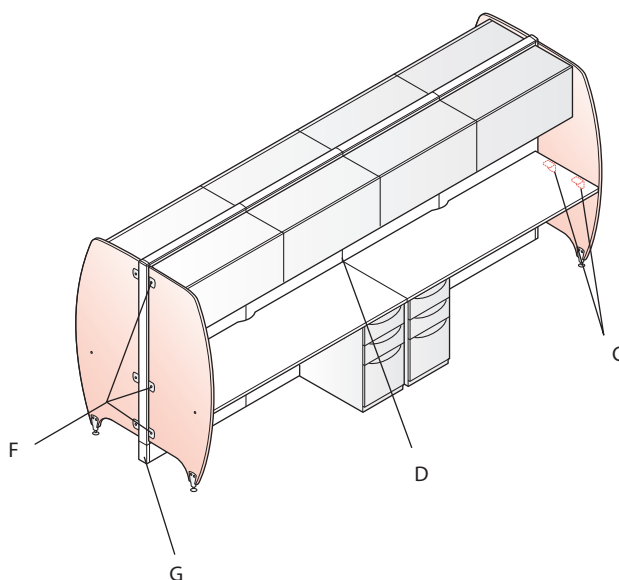

Wing Walls




F

Full-Height Two-Piece Wing Wall


PREMISE Full-Height Two-Piece Wing Walls provide cost-effective intermediate panel support when used in place of Return Panels. Two-Piece Wing Walls are always used between two adjacent panel hung worksurfaces.

- A. When used in left-handed or right-handed applications next to overhead storage components, Full-Height Two-Piece Wing Walls can be the same height as the Panel Spine.
- B. When used between two adjacent overhead storage units or shelves, the specified Wing Wall height must be lower than the bottom of the overhead storage components.
- C. Full-Height Two-Piece Wing Walls are pre-drilled and include worksurface L-brackets. Front L-brackets are spaced 3" (76mm) from front edge of Wing Wall. Brackets support one end of up to two panel-mounted adjacent worksurfaces of the same width/depth.
- D. Separately specify worksurface support for the worksurface ends opposite the Wing Walls.
- E. Full-Height Two-Piece Wing Walls include wall-to-panel attachment hardware for left-handed, right-handed, and center-mounted applications.
- F. Wing Walls (one or two piece) cannot share the same connector slots with adjacent components, such as tackboards, markerboards, paper-management mounting bars, etc.

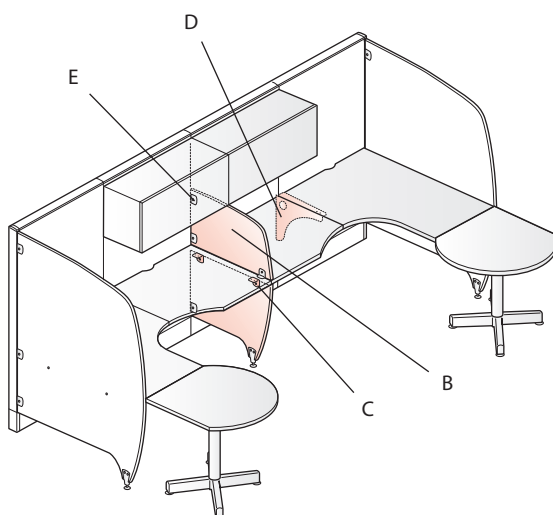

Full-Height Two-Piece Wing Walls must be the same width as the Wing Wall-mounted worksurface width/depth.


Wing Walls



Product Relationships: Wing Wall Height, Panel Height, and Upper Storage Components


When attached to 64" high PREMISE panels:

64" Panel with Adaptable Shelf

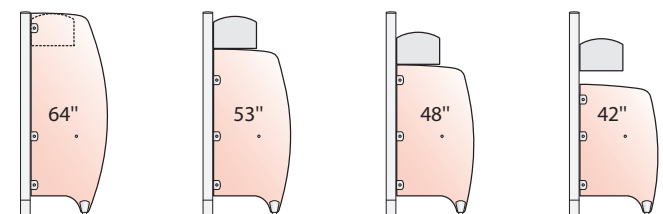

- 64" high Wing Walls must be installed in a left-handed or right-handed application when adjacent to shelf
- 42" high, 48" high, and 53" high Wing Walls are lower than panel-mounted shelves and can be center-mounted below two adjacent shelves

64" Panel with Adaptable Overhead Storage Unit

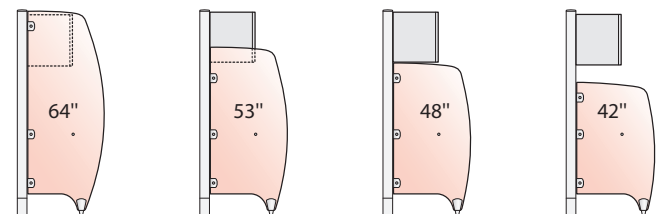

- 53" high and 64" high Wing Walls must be installed in a left-handed or right-handed application when adjacent to an Overhead Storage Unit
- 42" high and 48" high Wing Walls are lower than Overhead Storage Units and can be center-mounted below two adjacent Overhead Storage Units


Note Wing Wall can be used on Wall Track.

Wing Walls

Lower Unit Wing Wall

Lower Unit Wing Walls are a cost-effective alternative to attached end panels.

- A. Lower Wing Walls are pre-drilled and include worksurface L-brackets. Front L-brackets are spaced 3" (76mm) from front edge of Wing Wall. Brackets support one side/end of up to two panel-mounted adjacent worksurfaces of the same depth/width.
- B. Separately specify worksurface support for the worksurface ends opposite the Wing Walls.
- C. If the unsupported worksurface span is greater than 60", an intermediate support is required.
- D. Lower Wing Walls include wall-to-panel attachment brackets for left-handed, right-handed, and center-mounted applications.
- E. Separately specify End-of-Run Panel Connectors and Covers for panel applications.

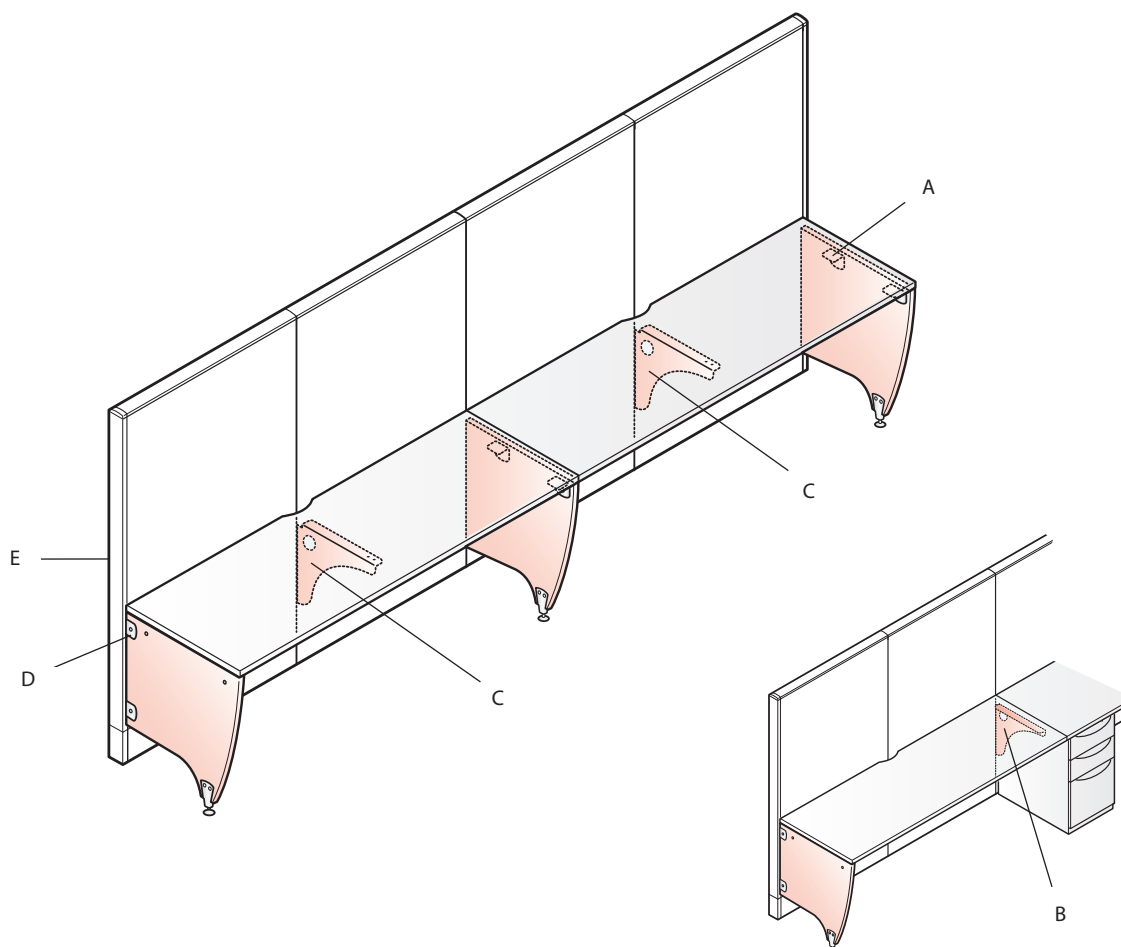


Lower Wing Walls must be the same width as the Wing Wall-mounted worksurface width/depth.




Worksurface widths greater than 30" (762mm) require field drilling of Wing Walls.


Wing Walls



B



C




E

Upper Unit Wing Wall

Upper Unit Wing Walls provide privacy above a single panel mounted work surface or between two panel mounted adjacent work surfaces.

- A. Upper Wing Walls are pre-drilled and include wall-to-panel attachment brackets for left-handed, right-handed, and center-mounted applications.
- B. When used below two adjacent Overhead Storage Units or shelves, the specified Wing Wall height must be lower than the bottom of the overhead storage components.
- C. Upper Wing Walls can be used at the end of a panel run above an attached pedestal.
- D. Upper Wing Walls include friction-fit worksurface attachment brackets.
- E. Upper Wing Walls cannot share the same connector slots with adjacent components such as tackboards, markerboards, paper-management mounting bars, etc.

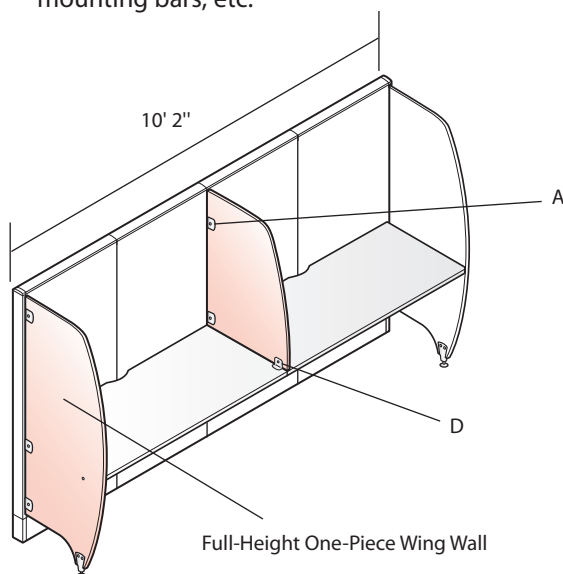


Note Full-Height One-Piece Wing Wall is recommended for end of run conditions.

Wing Wall Planning with Adaptable Cascade Edge Worksurfaces

Adaptable Cascade Edge Worksurface Exceptions for Full-Height Two-Piece Wing Wall


The lower Wing Wall will exceed the Adaptable Cascade Edge Worksurface profile.

Note Not recommended for use with Knife Edge.

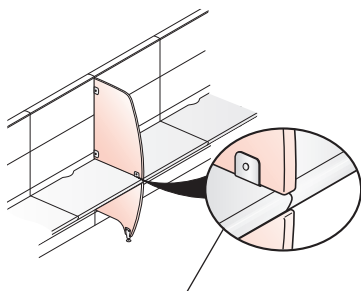


Adaptable Cascade Edge Worksurface detail with Lower Wing Wall.


Worksurface Support




Standard
Cantilever Brackets




Standard Shared
Cantilever Bracket




Standard Mini Cantilever




Shared Mini Cantilever




Off-Modular
Worksurface Bracket




Side Bracket




Side Bracket for use
with Knife Edge




Rear-Corner Bracket




Anti-Dislodgement
Bracket




Worksurface
Support Panel:
Wood or Laminate*




Flush Mount Plate




Countertop Brackets




Pedestal-to-Panel
Bracket




Straight
Leg Basic




Support
Column




Adjustable Height
Disc Base




Moxie Leg




Double Support Leg




Single Support Leg



Support Post



Worksurface Support
Leg: Freestanding




Worksurface Support
Leg: Panel Mounted

* Specify Worksurface Support Panel to match worksurface edge option.

Specifying Worksurface Support

These support options are specified separately:

- Standard Shared Cantilever Bracket
- Standard Cantilever Bracket
- Side Brackets (Left or Right)
- Rear Corner Bracket
- Flush Mount Plate
- Anti-Dislodgement Bracket
- Worksurface Support Panels
- Support Column Or Straight Leg Basic
- Pedestal-To-Panel Bracket
- Wing Wall
- Freestanding and Panel-Mounted Support Legs

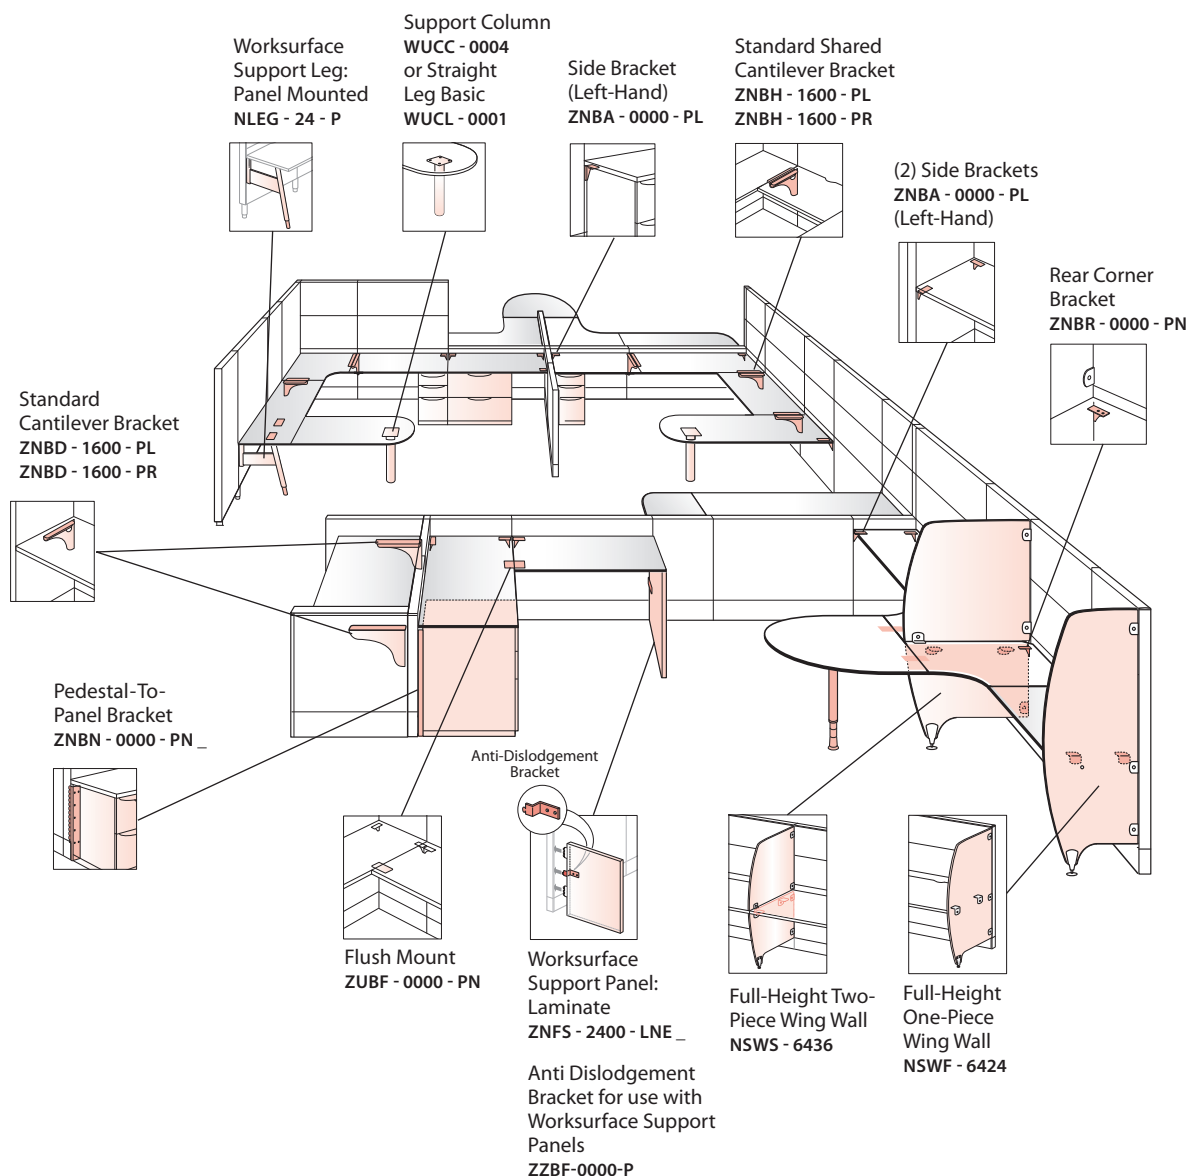


Right-hand and left-hand applications are determined according to the worksurface user's vantage point. All Side Brackets required on the user's right side of the worksurface should be specified as right-hand, and all Side Brackets on the left side should be specified as left-hand.



For most worksurface applications one end of each worksurface must be supported by a Worksurface Support Panel, pedestal drawer, Lateral File, Storage Cabinet, Support Column, Return Panel with Side Brackets, or Return Panel with cantilever positioned perpendicular to the worksurface (i.e. Corner Worksurface application). In most cases, worksurfaces may not be fully supported by cantilevers.

Specifying Worksurface Support

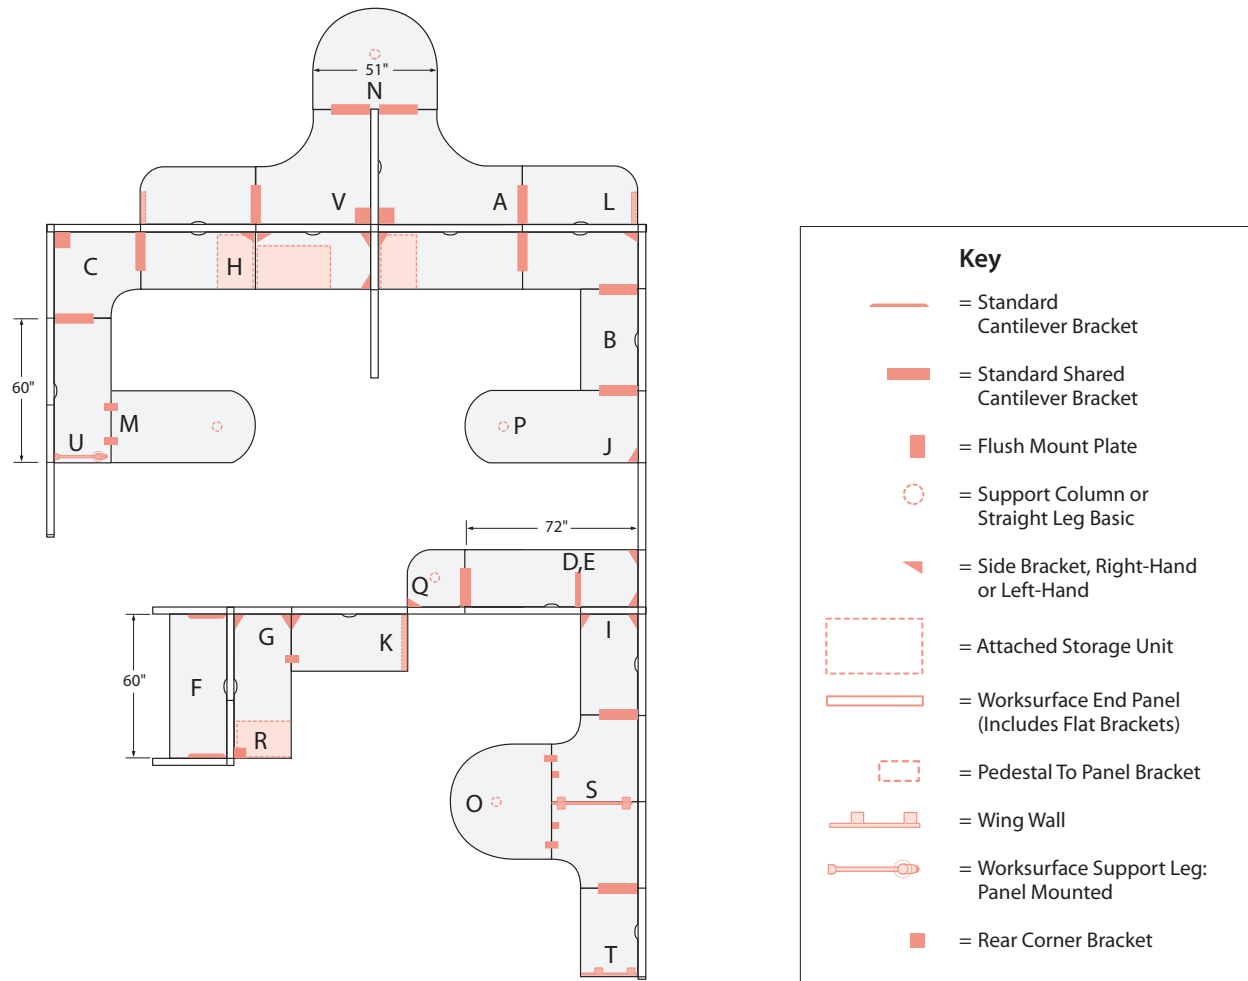

Tips

- Worksurface Reinforcement Channels can provide additional strengthening to 54" (1372mm)- and 60" (1524mm) worksurfaces on like-sized panels where heavy loads are anticipated.
- Worksurface Reinforcement Channels provide additional support for laminate or wood worksurfaces and freestanding worktops with spans 54" (1372mm) or larger that are heavily loaded and not otherwise supported by mid-span cantilevers, worksurface supports, legs, or under-worksurface storage.

Notes

- A Standard Shared Cantilever can be field modified to a Standard Cantilever Bracket.
- For most worksurface applications, one end of the worksurface must be supported with at least one of the following: a Worksurface Support Panel, Lower Wing Wall, attached pedestal, attached Lateral File, attached storage unit, Support Column, Straight Leg Basic, or Return Panel with Side Brackets.
- Exception to the above note: If the Rectangular Worksurface is 24" (610mm)-deep, no wider than 60" (1524mm), and wrapped with Return Panels 30" (762mm) or wider, Standard Cantilevers can be used at each end. This exception does not apply to 30" (762mm) deep worksurfaces.

Specifying Worksurface Support

Standard Shared Cantilever Bracket

Shared Cantilever Brackets are specified individually. The cantilevers install in the Panel Connector slots for 1" (25mm) incremental adjustments in height. Standard shared cantilevers are used in the following applications:

- A. Shared support between worksurfaces in a straight run
- B. Shared support between adjacent worksurfaces in a U-shaped configuration
- C. Shared support between a 90° Corner or Curved Wrap-Around Worksurface and an adjacent worksurface
- D. Intermediate support for an unsupported worksurface span more than 60" (1524mm)

Standard Shared Mini Cantilever Bracket

Shared Mini Cantilever Brackets are specified individually for use with 18" knife edge worksurfaces.

Standard Cantilever Bracket

Standard Cantilever Brackets are specified individually for either left-hand or right-hand support. The cantilevers install in the Panel Connector slots for 1" (25mm) incremental adjustments in height. Handed cantilevers are used in the following applications:

- E. Intermediate support for an unsupported worksurface span greater than 60" (1524mm)
- F. Two handed cantilever brackets will support a worksurface up to 60" (1524mm) wide x 24" (610mm)-deep when the Return Panels are wider than the worksurface depth. Not applicable for 30" (762mm)-deep worksurfaces.

Standard Mini Cantilever Bracket

Standard Mini Cantilever Brackets are specified individually for either left-hand or right-hand support. The mini cantilever bracket is for use with 18" knife edge

Side Bracket, Left or Right

Side Brackets are specified individually for either left-hand or right-hand support. The Side Brackets install in the Panel Connector slots in 1" (25mm) incremental adjustments in height. Side Brackets are used in the following applications:

- G. In an L-shaped worksurface configuration, use left-hand and right-hand brackets in conjunction with a flush mount plate to support adjacent worksurfaces
- H. Behind attached pedestals, Lateral Files, or storage units
- I. When the worksurface depth is the same as the width of the Return Panel, use (2) left-hand or (2) right-hand Side Brackets to support one end of the worksurface
- J. To attach a front corner of a D-shaped or Rectangular Convergent Worksurface to the panel

Side Bracket for use with Knife Edge

Side Brackets for use with Knife Edge are specified individually for either left-hand or right-hand support. Side Bracket attaches to the front corner of the knife edge worksurface.

Worksurface Support Panel

Support panels are available in 29" (737mm) standard. Available depths include 12" (305mm), 18" (457mm), 24" (610mm), and 30" (762mm). Support panels are non-handed and work in left-handed, right-handed, and shared applications. Includes (2) flat brackets for adjoining worksurfaces. Support panels are used in the following applications:

- K. An equal depth support panel provides floor support and modesty for one end of worksurface
- L. A 12" (305mm)-deep support panel provides floor support for the Radius End of a 24" (610mm)-deep worksurface. For other worksurface types the support panel can be up to 6" less than the worksurface depth.

Anti-Dislodgement Bracket

Worksurface support panel with an Anti-Dislodgement Bracket can be used in place of a return panel when used in conjunction with a worksurface. Refer to Load and Support Guidelines for more detail.

Flush Mount Plate

Flush Mount Plates must be used with additional support brackets. Flush Mount Plates are used in the following applications:

- M. Rectangular worksurfaces perpendicular to each other.
- N. Flush Mount Plates attach Corner Worksurface to end in a Winged Wall application.

Specifying Worksurface Support

Support Column (or) Straight Leg Basic

Support Columns adjust from 27" to 31½" (686 to 800mm). Specify separately for Convergent or Conference End Worksurfaces.

Straight Leg Basic with glides adjust from 27" to 31" (686 to 787mm). Specify separately for Convergent Worksurfaces.

Support Column or Straight Leg Basic are used in the following applications:

- O. Radius End of attached Conference End Worksurface
- P. Radius End of Convergent Worksurface
- Q. End of Rectangular Radius End

Attached Pedestal, Lateral File, and Storage Units

Attached storage elements provide worksurface floor support and storage capacity. They support the rectangular end of a worksurface when used in conjunction with a left-hand or right-hand corner bracket or a pedestal-to-panel bracket.

- R. Attached pedestal used with pedestal-to-panel bracket fills in the gap between back of pedestal and panel, providing a finished appearance.

Wing Wall

Wing Walls attach perpendicularly to Monolithic or Stackable Panels. Full-Height and Lower Wing Walls include attachment brackets to partially support worksurfaces. Wing Walls are used in the following applications:

- S. Full-Height Two-Piece Wing Walls include worksurface support for back-to-back Corner, 90° Wrap-Around Corner Worksurfaces. Separately specify worksurface supports for attachment to opposite end of worksurfaces.
- T. Full-Height One-Piece Wing Walls include brackets to support one end of the worksurface. Separately specify worksurface support for the opposite worksurface ends.

Worksurface Support Leg: Panel Mounted

- U. The Support Leg provides height adjustment of the worksurface from 26" to 32" (660mm to 813mm) in 1" (25.4mm) increments. Glide provides 1" (25.4mm) of leveling adjustment. Support Legs are non-handed and can be used in shared applications.

Rear Corner Bracket

- V. Attaches rear corner of worksurface to panel.


Worksurface Support: Rear Corner Bracket



ZNBR - 0000 - PN

All Corner Worksurfaces, when panel wrapped on both sides, require both a separately specified Rear Corner Bracket and an appropriate worksurface support. Support brackets are panel system specific.

Panel Wrapped Corner Worksurface:

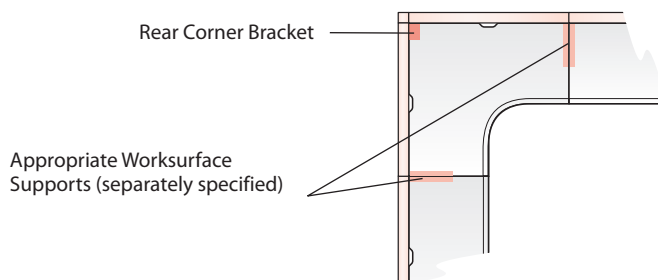

Corner, 90°
Straight Front




Corner, 90°
Wrap-Around



Corner, 90°
Notched



Corner, 90°
Angled




Corner, 90°
Wrap-Around
Transitional



Corner, 90°
Notched
Transitional



Corner, 90°
Angled
Transitional



Corner, 90°
Split-Top



Corner, 90°
Wrap-Around
Extended



Corner, 90°
Notched
Extended



Corner, 90°
Wrap-Around
Transitional Extended



90° Merger




Corner, 120°
Wrap-Around



Rear Corner Brackets are left-hand brackets.

Worksurface Support: Standard Shared Cantilever

The Standard Shared Cantilever Bracket is for use in specific worksurfaces application for PREMISE.




Standard Shared Cantilever Applications

Left-Hand	ZNBH - 1600 - PL
Right-Hand	ZNBH - 1600 - PR

Corner Application


In Corner Applications with adjacent worksurfaces, a Standard Shared Cantilever Bracket is used to support where worksurfaces come together.



Notes • Use Mini Cantilever for 18" knife edge worksurface.


120° Link Application

In addition to the Standard Shared Cantilever Bracket a floor Support Column or leg is required.





D-Shaped Ender Application

In addition to the Standard Shared Cantilever Bracket a floor Support Column or leg is required.




Conference End and Key Conference End Applications

In both of the applications below, in addition to the Standard Shared Cantilever Bracket a floor Support Column or leg is required.

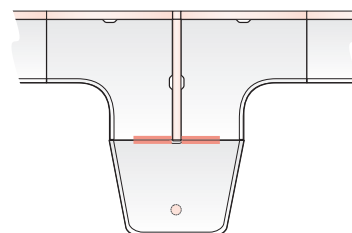

Tip Order half right-hand and half left-hand Standard Shared Cantilever Brackets for the initial installation.

Worksurface Support: Side Bracket




ZNBA - 0000 - PL (Left-Hand)
ZNBA - 0000 - PR (Right-Hand)

Convergent Worksurface and equivalent worksurface panel depth applications require a separately specified support bracket at the end of the panel. Support brackets are panel system specific. In the application below, the recommended bracket for PREMISE applications is the Side Bracket.


In addition to the Side Bracket, separately specify appropriate worksurface support.

Notes • Use Side Bracket for use with Knife Edge at the front edge of a knife edge worksurface.


Convergent Application: Panel Mounted On One Side




D-Shaped Convergent




D-Shaped Convergent Wrap-Around




Rectangular Convergent




Corner, 90° Wrap-Around Extended



Corner, 90° Wrap-Around Transitional Extended



Corner, 120° Wrap-Around




Bent



All corner shaped worksurfaces do not have a rear wireway.

Worksurface Support: Rectangular Radius End Worksurface


When specifying the Rectangular Radius End worksurface in PREMISE floor support is required.



Side Brackets

SIDE BRACKET	
Left-Hand	ZNBA - 0000 - PL
Right-Hand	ZNBA- 0000 - PR

Application One:



18", 24", and 30" Deep Rectangular Radius End Worksurface with all edge options.

Notes • Use Side Bracket for use with Knife Edge at the front edge of a knife edge worksurface.

Separately Specified Floor Support:




Straight Leg Basic
(WUCL-001)
or Support Column Options:
See Worksurface Support
Statement Of Line


Worksurface Support: Rectangular Split-Top Worksurface

The Rectangular Split-Top is available in wood or laminate surface. Depth dimensions for rear surface are as shown.

Rectangular Split-Top: 24" Deep






Rectangular Split-Top: 30" Deep



Rectangular Split-Top Worksurface with Standard Shared Cantilever Support

The 24" and 30" deep Rectangular Split-Top is designed for use with standard depth cantilever brackets. For PREMISE applications, specify Standard Shared Cantilever Brackets; one Standard Shared Cantilever Brackets for each side of the Rectangular Split-Top Worksurface.




STANDARD SHARED CANTILEVER BRACKET

Left-Hand	ZNBH - 1600 - PL
Right-Hand	ZNBH - 1600 - PR


Worksurface Support: Corner, 90° Split-Top Worksurface

The Corner, 90° Split-Top may be used with multiple adjoining worksurface depths and shapes. Depicted below are a few of the applications available with the Split-Top corner.


Corner, 90° Split-Top, 24" Deep Applications:



18" Deep Rectangular Worksurface: align with the rear portion of the Corner Worksurface.




24" Deep Rectangular Worksurface: align with the front portion of the Corner Worksurface.




18"/24" Deep Rectangular Transition Worksurface: align with the rear portion of the Corner Worksurface.


Corner, 90° Split-Top, 30" Deep Applications:



18" Deep Rectangular Worksurface: align with the rear portion of the Corner Worksurface.



30" Deep Rectangular Worksurface: align with the front portion of the Corner Worksurface.



18"/24" Deep Rectangular Transition Worksurface: align with the rear portion of the Corner Worksurface.




Remember to specify the Rear Corner Bracket for the above shown applications.

Worksurface Support: Corner, 90° Split-Top Worksurface


Corner, 90° Split-Top Worksurface with Standard Shared Cantilever Support

The 24" deep Corner, 90° Split-Top is designed for use with standard depth cantilevers for both 18" and 24" deep adjoining worksurfaces. For PREMISE, specify Standard Shared Cantilever Brackets; one Standard Shared Cantilever for each side of the Corner Worksurface.

24" Deep Applications:

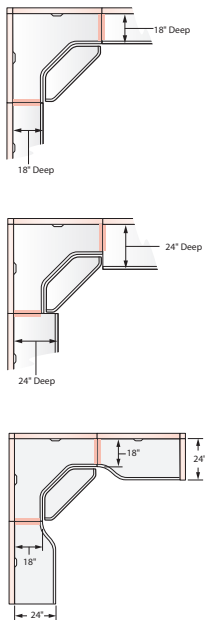

30" Deep Applications:

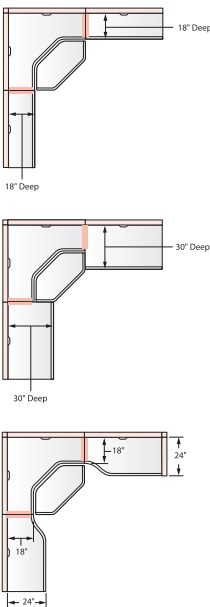

STANDARD SHARED CANTILEVER BRACKET

Left-Hand	ZNBH - 1600 - PL
Right-Hand	ZNBH - 1600 - PR

Tip Remember to specify the Rear Corner Bracket for the above shown applications.

Worksurface Support: Split-Top Worksurface

Split-surface worksurfaces feature a fixed-height rear surface and an adjustable-height front surface. They are available in regular and 90° corner styles. A 1" (25mm) gap exists between the front worksurfaces and adjacent worksurfaces as a safety measure to eliminate pinch points. Overall worksurface nominal depth is 24" or 30" (762mm).

Tips


- When a split worksurface is adjusted to the highest level, the support brackets protrude 4" into the kneespace. When it's adjusted to the lowest level, support brackets protrude 12" into the kneespace.
- When even with worksurface height, support brackets protrude 8" into the kneespace.

Rear Surface

- Fixed-height
- Attaches to panel side rails with cantilever brackets; slots in panel side rail allow worksurface to be adjusted in 1" (25mm) vertical increments

Front Surface


- 12" (305mm) deep
- Manually adjusts to any position 6" above and 6" below the rear worksurface
- Locking control lever securely holds worksurface at desired height
- Tilts -15° to +9°

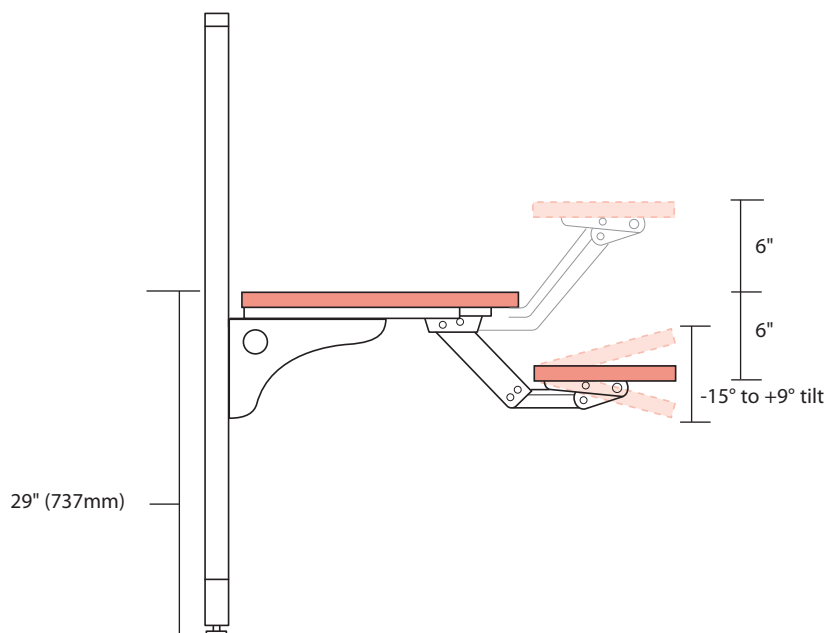

Note If the front surface is tilted fully forward, the keyboard pad should be secured to the surface or resting against a separately specified palm rest.


Adaptable WorkSurfaces: Countertops

- Countertop widths can match or be less than the width of a PREMISE panel on applications without Variable Height Covers. Countertop widths are available in standard 6" increments from 24" – 120".
- Countertops are also available in widths to accommodate applications with countertops adjacent to one or two Variable-Height Covers. Countertop widths are available in increments that are either 1" or 3" less than the standard 6" increment widths for use in either one or two Variable-Height Cover conditions.
- Countertops are available in wood or laminate.




Application One: Same Width Panel and Countertop

- A countertop can be specified to match width of panel.




Application Two: Countertop Less than the Width of the Panel

- A countertop can be specified less than the width of the Panel.



Application Three: One Variable-Height Cover

- Specify the countertop one inch less than the panel width to accommodate a single adjacent variable-height Cover (1-35" countertop).



Application Four: Two Variable-Height Covers

- Specify the countertop 3" less than the panel width to accommodate two adjacent Variable-Height Covers (1-69" countertop).


Note Additional widths have been added to accommodate applications using Variable-Height Covers.

Specifying Worksurface Support

Coordinating Worksurface Height

Panel Connector slots allow Shared Cantilever Brackets and Side Brackets to be installed at any height in 1" (25mm) increments. In some situations, worksurface height may require adjustment.


- A Worksurface Height-Adjustment Kit raises the worksurface for screen viewing and the keyboard pad maintains typing height at raised worksurface

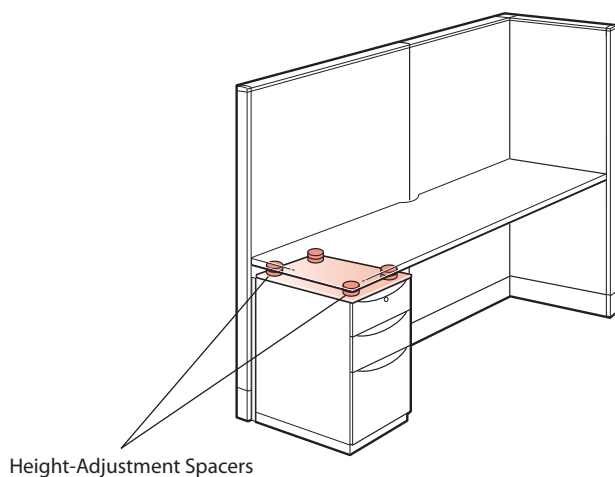

Joining Freestanding Casegoods to Systems Worksurfaces

Casegoods (with or without pedestals) can be attached to a Panel-Hung Worksurface. The return attachment end of the worksurface must be supported by a worksurface end panel.


The modesty panel of an attached return or bridge connects to the front edge of the worksurface end panel. Flush Mount Plates on the underside of the return surface connect to the panel-mounted worksurface.

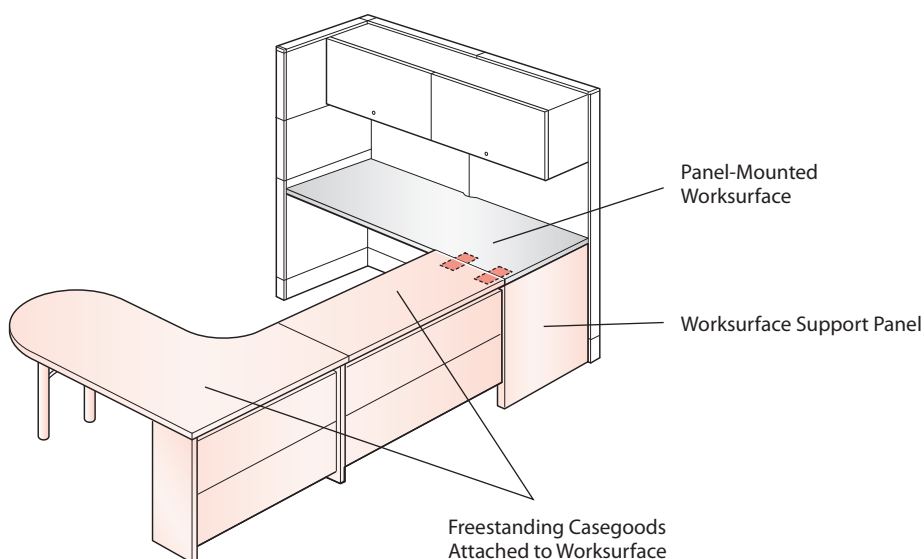

Designing with Overhead Storage Units: On-Modular

When designing with on-modular Overhead Storage Units, standard cross bars provide proper support in a Stackable Panel configuration.

Bracket Attaches to
Panel Connector Slots



Standard Overhead Storage Unit (OSU)

May be used with a Monolithic or Stackable Panel configuration. Storage unit attaches to the Panel Connector slots.


The OSU width must match the panel width or may span multiple panels equaling the OSU width.

- May be used with any pad surface option
- Does not require a structural cross bar
- May be used with any top cap option
- Recommended panel height for standard mount OSU application is 64"

Tips

- Separately specify shelf gang clip for unbalanced Overhead Storage Unit application.
- Lower shelf of this storage unit has a low backstop; back of unit is open to panel surface.
- On-Modular upper storage units are not designed for use with 10" high slat pads.

Bracket Attaches to
Panel Connector Slots

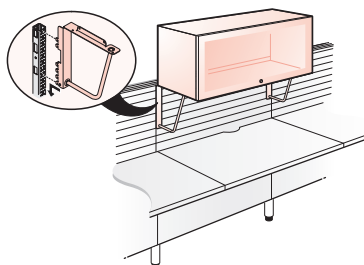


Up-Mount Overhead Storage Unit (OSU)

May be used with a Monolithic or Stackable Panel configuration. Storage unit includes attachment brackets to secure each side of the storage unit to the Panel Connector slots.

The OSU width must match the panel width or may span multiple panels equaling the OSU width.

- May be used with any pad surface option
- Does not require a structural cross bar
- May be used with any top cap option
- Recommended panel height for up-mount OSU application is 48" or 53"



Tips

- Separately specify shelf gang clip for unbalanced Overhead Storage Unit application
- Storage unit has a full-height back panel
- On-Modular upper storage units are not designed for use with 10" high slat pads
- Does not require Grooved Top Cap


Note

For additional personal storage specify the Up-Mount Bracket Shelf; shelf attaches to Up-Mount OSU Mounting Brackets.

Designing with Overhead Storage Units: Off-Modular

When designing with off-modular Overhead Storage Units a structural cross bar is required in a stackable panel configuration.

Attaches to Outer Channel
of Grooved Top Cap

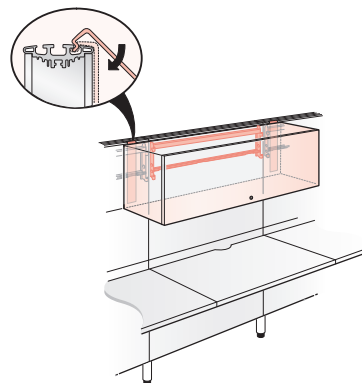

Standard Overhead Storage Unit (OSU): Off-Modular

May be used with a Monolithic or Stackable Panel configuration with a Grooved Top Cap. Storage unit includes attachment brackets to secure each side of the storage unit to the outer channel of the Grooved Top Cap.

In stackable application the standard mount **off-modular** storage unit may be used with two pad types, only. The structural fabric (type Z) pad or the slat (type Y) pad are the only pad types allowed in this application.

In addition to using these specific pad types a structural cross bar is also required. Both the structural fabric (type Z) pad and the slat (type Y) pads are available as Stack Kits with structural cross bars.

In a standard OSU **off-modular** application it is recommended to use the structural fabric pad or slat pad in addition to structural cross bar along the entire Panel Spine at the 64" high position to ensure proper support of the **off-modular** OSU when relocated along the Grooved Top Cap.

Tips

- Separately specify shelf gang clip for unbalanced Overhead Storage Unit application.
- Attachment location to Grooved Top Cap prohibits stacking storage units above one another: single row application only.
- Lower shelf of this storage unit has a low backstop; back of unit is open to panel surface.


Note

May not be used with 10" high stack pad with beltline power and communication.

Designing with Overhead Storage Units: Up-Mount Off-Modular

When is a structural cross bar required? When designing with up-mount off-modular Overhead Storage Units a structural cross bar is required in a Stackable Panel configuration.

Attaches to Outer Channel
of Grooved Top Cap

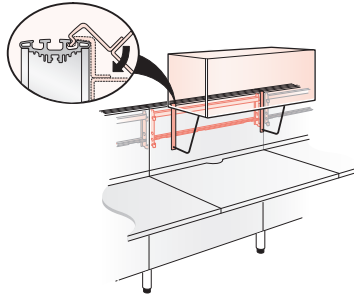

Add 16" to the Panel Height for
the Overall Application Height

Up-Mount Off-Modular Overhead Storage Unit (OSU)

May be used with a Monolithic or Stackable Panel configuration with a Grooved Top Cap. Storage unit includes attachment brackets to secure each side of the storage unit to the outer channel of the Grooved Top Cap.

In stackable application the **up-mount off-modular** storage unit may be used with two pad types only. The fabric, (type Z) pad or the slat (type Y) pad are the only pad types allowed in this application.

In addition to using these specific pad types a structural cross bar is also required. Both the fabric (type Z) pad and the slat (type Y) pads are available as Stack Kits with structural cross bars.

In an **up-mount off-modular** OSU application it is recommended to use the structural fabric pad or slat pad in addition to structural cross bar along the entire Panel Spine at the 48" high position to ensure proper support of the up-mount off-modular OSU when relocated along the Grooved Top Cap.

Tips

- Using the up-mount OSU and standard OSU units side-by-side is not recommended due to installed depth differences.
- Recommended panel height for up-mount OSU application is 48" or 53".
- For beltline power and communication access separately specify the 16" high Single Slat Technology Pad(s) and structural power kit.
- Separately specify shelf gang clip for unbalanced Overhead Storage Unit application.
- Storage unit has a full-height back panel.
- Up-mount shelf utilizes same brackets as up-mount Overhead Storage Unit.


Notes

- May not be used with 10" high stack pad with beltline power and communication.
- Refer to the Power and Communication Management: Product Application section for details regarding work-height power applications.
- For additional personal storage specify the up-mount bracket shelf; shelf attaches to up-mount OSU mounting brackets.


Designing with Visual Privacy Elements: Toppers

Toppers add privacy to a panel configuration. They can be added to an existing panel application or used in a new application provided the PREMISE panel has a Grooved Top Cap. Toppers embrace human performance control, they can be easily relocated from panel-to-panel along the Grooved Top Cap Panel Spine.


- Toppers may be located on- (or) off-modular to the panel widths in a straight panel condition or they can span across a 3-Way or 4-Way panel intersection




On-Modular Topper Application



Off-Modular Topper Application




Topper Application
3-Way Panel Intersection: On-Modular Condition



Topper Application Spanning
3-Way Panel Intersection: Off-Modular Condition

Tip Toppers may not be installed directly on a 2-Way, 3-Way, 4-Way, or End-of-Run Panel Connector top cap.

Grooved Top Cap

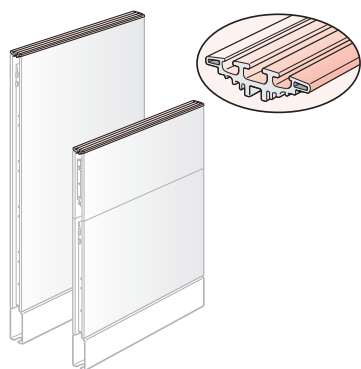

Monolithic and Super Base Panels are specified with your choice of top caps; standard, grooved or wood. For a Topper application specify Grooved Top Caps. The Toppers are installed into the center channel of the Grooved Top Cap.

Grooved Top Caps can be specified separately as a single catalog number for additional design flexibility. To update an existing product application specify Grooved Top Caps to be installed on existing PREMISE Monolithic or Super Base Panels.

For a seamless top cap application, specify a Grooved Top Cap 72" wide or greater to span multiple panels. Using a longer top cap will eliminate multiple top cap seams creating a cleaner aesthetic. Spanning multiple panels with longer Grooved Top Caps will also provide additional support between two or more panel configurations in a straight panel condition.


- Tips**
- 32" – 53" high Monolithic and Stackable Panels are recommended for a Topper application.
 - 32" high Super Base Panels are not recommended for Topper application; utilize Monolithic Panel.
 - Glazed panels and Single Doors are not available with Grooved Top Caps.

Note Refer to Price List for specific panel widths to be used with multiple panel top cap.


Designing with Visual Privacy Elements: Toppers

Toppers are available as Stand-Alone or as Shared Kits to provide design flexibility.


- Stand-Alone Topper Kits can be used independently along an entire Panel Spine. Because this kit includes two vertical columns it will offer greater reconfiguration flexibility than an application using Shared Topper Kits
- Shared Topper Kits include one vertical column. A Shared Kit relies on sharing a vertical column from the Stand-Alone Kit. Shared Kits are always used with at least one Stand-Alone Kit



Stand-Alone Topper Kit
Includes 2 Vertical Columns



Shared Topper Kit
Includes 1 Vertical Column




Stand-Alone Kit and Shared Kit
Includes 3 Vertical Columns


Tips

- Toppers are 16" high.
- Toppers are non-load bearing.
- When using Toppers with Canopies, must specify Stand-Alone Topper Kit.


For each Shared Topper Kit the overall width of the Topper application will be 1¼" less than a Stand-Alone Topper Kit application. The dimension loss is due to the shared column required for a Shared Kit application. For cost effective Topper application, use Stand-Alone Kits with Shared Kits.



The Topper Kit Vertical Column is 1¼" Diameter




Stand-Alone Topper Kit application
• 8 Vertical Columns



Stand-Alone with Shared Topper Kit application
• Topper dimensions creates space between vertical column and end of top cap
• 5 Vertical Columns

Note Actual dimensions are shown.


Designing with Visual Privacy Elements: Toppers



30" Wide
Stand-Alone Topper


When using a Topper adjacent to a Variable-Height Cover specify the Topper width to accommodate the depth of the Variable-Height Cover.

In this application a Stand-Alone Topper is mounted on a 36" wide panel. Because the Variable-Height Cover is 1" deep the Topper width must be reduced to 30" wide.



Stack Kit

If the dimension difference between the Topper width and the panel width is aesthetically not acceptable, consider using a stack kit as an alternative.



36" Wide
Stand-Alone Topper and
36" Wide Shared Topper

In this application a 36" wide Stand-Alone Topper and a 36" wide Shared Topper may be mounted on the two 36" wide panels. Because the shared Topper has only one vertical column this Topper combination works with the 1" deep Variable-Height Cover.


The vertical Topper column will be off-set from the straight connector due to 1" deep Variable-Height Cover.

Tips


- When designing with Toppers remember to specify the Topper width to accommodate the depth of the Variable-Height Cover(s).
- Toppers may not be installed directly on a 2-Way, 3-Way, 4-Way, or End-of-Run Panel Connector top cap.

Designing with Visual Privacy Elements: Toppers

When using Topper kits between two Variable-Height Covers specify the Topper width to accommodate the depth of the Variable-Height Covers.

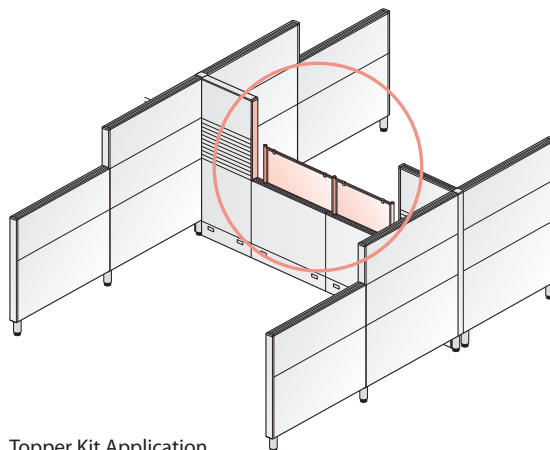

Topper Kit Application




Stand-Alone with Shared Topper Kit application

In this application a 36" wide Stand-Alone Topper and a 30" wide Shared Topper are mounted on two 36" wide panels. Because the variable-height cover is 1" deep, the 36" wide Stand-Alone Topper will not line up with the Panel Connector. This Topper application creates 5¼" negative space which can be allocated at either end of the Topper application or divided between both ends of the Topper application.

- Three vertical columns
- Shared post is off-set from Panel Connector
- Topper application creates 5¼" space between vertical column to end of top cap




Using Toppers between two variable-height -overs will always result in space between vertical column and Variable-Height Covers.



Stand-Alone Topper Kit application

In this application two 30" wide Stand-Alone Toppers are mounted on two 36" wide panels. Due to the two 1" deep Variable-Height Covers, two 36" wide Stand-Alone Toppers will not dimensionally work in this application. The Topper application shown here creates 10" of space which can be allocated anywhere along the Grooved Top Cap.

- Four vertical columns
- Topper application creates 10" space




Stack Kit Application

For a continuous application without space use Stack Kits.


Designing with Visual Privacy Elements: Toppers

Understanding Topper Assembly Dimensions


- All Toppers have a $\frac{1}{2}$ " gap between the vertical posts and each side of the Topper insert material
- Translucent Toppers have a $\frac{1}{4}$ " gap between the upper horizontal rod and the top of the translucent insert (Note: Fabric scrim does not have a gap)
- Translucent Toppers have a $\frac{1}{4}$ " gap between the panel top cap and the bottom on the translucent insert
- Fabric scrim Toppers have a $\frac{3}{8}$ " gap between the panel top cap and the bottom of the lower fabric rod



Fabric Scrim Stand-Alone Kit




Translucent Stand-Alone Kit



NETM - __ 00 - __

For a Monolithic top feed application $7\frac{1}{2}$ " of space is required to install top feed. Plan Topper widths accordingly.



NETP - __ 00 - __

For a stackable top feed application. The power feed is installed $1\frac{1}{2}$ " from either edge of the panel end. The top feed with trim is $7\frac{1}{2}$ " wide. Plan Topper widths accordingly.







When using a top feed power module on a Grooved Top Cap with Toppers remember to include the width of the Top Feed Module when determining the Toppers widths.

Designing with Visual Privacy Elements: Canopies


Canopies add privacy and a sense of shelter to your workspace. They can be used in a panel environment or in a Tri Table application.

- Canopies used in a panel environment mount into the center channel of a Grooved Top Cap. Single and double Canopies may be mounted directly to the Grooved Top Cap or a single Canopy may be attached to a panel mounted Topper
- Canopies may be located on- (or) off-modular to the panel widths in a straight panel condition
- Canopies can span across a 3-Way or 4-Way panel intersection
- Canopies may also be used in a Tri Table application. In this application Canopies may be mounted to desk-mounted Screens




Top Cap Mounted Canopies

For top cap mounted Canopies 48" and 53" high panels are recommended.



Single Canopy




Double Canopy

Tips

- Canopies are available in three widths: 36", 42", and 48".
- Grooved Top Cap panels are required for all panel mounted Canopy applications.
- Canopies are installed into the center channel of the Grooved Top Cap.
- Topper mounted Canopies are only available as single Canopies.
- When designing with Canopies specify the Canopy width to accommodate the depth of the variable height covers.

Topper Mounted Canopy

For Topper mounted Canopies only 32" (Monolithic Panel only) and 42" high Monolithic Panels are recommended.




Double Canopy

Tip

32" high Super Base Panels are not recommended for Topper application; utilize Monolithic Panel.

Designing with Visual Privacy Elements: Canopies





Worktop Mounted Screen Canopies

In a Tri Table application Canopies attach to a worktop mounted screen.

- Separately specify the worktop mounted Canopy
- Each side of the Canopy installs into a vertical column of the worktop mounted screen
- Worktop mounted Canopies are available for 36", 42" and 48" wide worktop mounted Screens

Dimensions

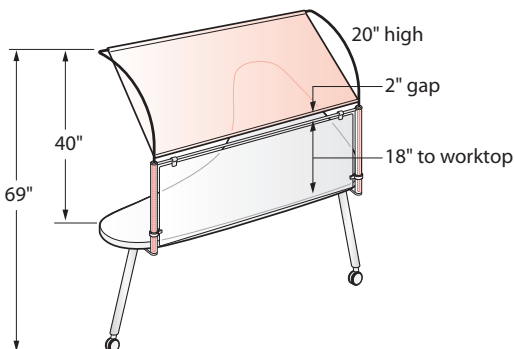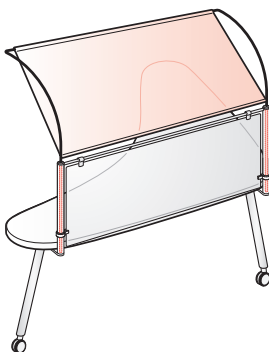


Installed Canopy height is 69" when mounted on a 29" high worktop.

Tips

- Separately specify Worktop Mounted Screen.
- Specify worktop mounted stand alone Screens 12" less than the Tri Table width.

Designing with Visual Privacy Elements: Canopies

Canopy Rod Installs into Vertical Column Assembly




Vertical Column Assembly

Top Cap Mounted Canopies


Canopies are designed to provide privacy and shelter. Top cap mounted and Topper mounted Canopies must be used with the Grooved Top Cap panel option.

The vertical column assembly included with a top cap mounted Canopy installs into a Grooved Top Cap panel.

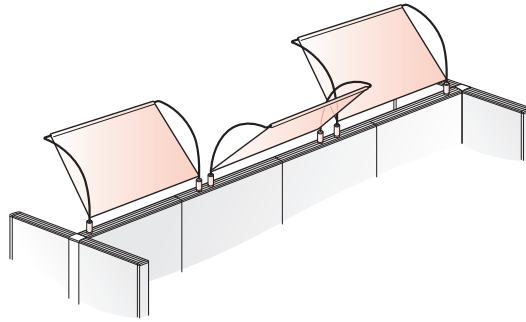

- Single panel mounted Canopies provide one sided privacy

The Grooved Top Cap allows panel mounted Canopies to be used in an on-modular or off-modular application.

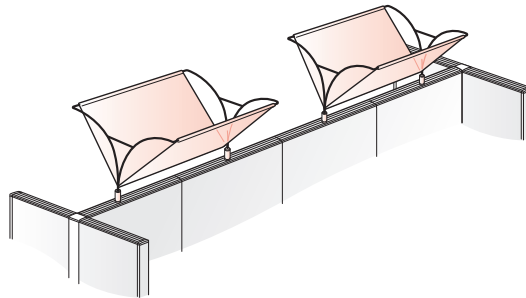

- For a back-to-back application use double Canopies


Tips

- Canopies mounted side-by-side will have minimal gap.
- Canopies mount into the center channel of a Grooved Top Cap panel.
- 48" and 53" high are recommended panel heights for panel mounted Canopies.


Designing with Visual Privacy Elements: Canopies

Topper Mounted Canopy


A Topper mounted Canopy installs into the vertical columns of a Topper kit. See details below:



Topper Mounted Canopy




Separately Specify Topper Kit



Canopy Rod Installs into
Topper Vertical Column


Single Vertical
Topper Columns

Separately specify Topper and Topper mounted Canopy. Each side of the Canopy installs into a vertical column of the Topper kit

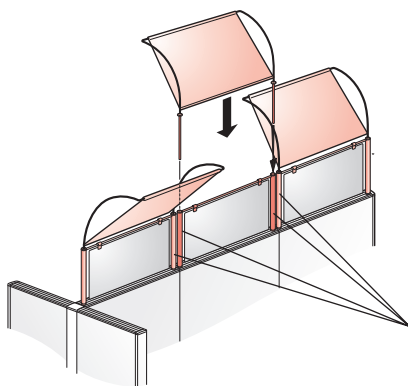

(4) Stand-Alone
Vertical Topper Columns

- A side-by-side Topper mounted Canopy application require single vertical Topper columns

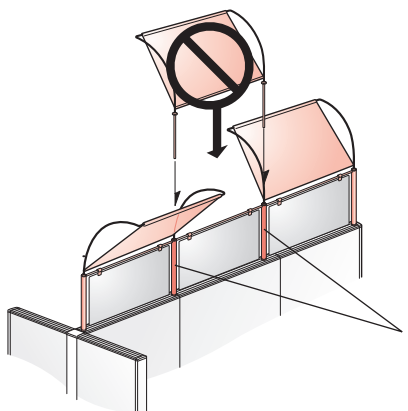

(2) Shared vertical Topper columns. Do not use shared vertical Topper columns in this application.

- Two Topper mounted Canopies in a side-by-side application may not be installed in a shared Topper column. Use single vertical Topper columns for this application.

Tips

- For Topper mounted Canopies 32" (Monolithic Panel only) and 42" high panels are recommended.
- Topper mounted Canopies may be used in a single sided application only.

Designing with Visual Privacy Elements: Banners


Banners are designed to offer visual privacy at end-of-run, 2-Way and 3-Way outside 90°, and 2-Way outside 120° corner conditions.

- Banner attaches to the side of a Panel Connector*
- Does not occupy the Panel Connector slots
- Banners cannot be used in an in-line Panel Connector condition
- Designed to be 16" above the panel
- Available in fabric scrim or translucent materials
- White translucent available at base list price; grey and pattern translucents available at an upcharge
- Frame available in standard trim colors at base list price; metallic trim colors are available at an upcharge

The banner is available in desk height or floor height to meet your privacy needs. Both banner types are designed to extend 16" above the panel. The top of the banner will visually line up with the top of an up-mount Overhead Storage Unit.

Banners are designed to be used with 48", 53", and 64" high panels. The panel configuration may be Monolithic or stackable. Banners must be specified based on the coordinating panel height.


Desk Height Banner*




- 21" Wide Banner
- 24" Deep Worksurface

	PANEL HEIGHT	USE BANNER HEIGHT
Desk Height Banner	48"	34"
	53"	39"
	64"	50"

Floor Height Banner



- 21" Wide Banner
- 24" Deep Worksurface



- 18" Deep Freestanding Lateral File

	PANEL HEIGHT	USE BANNER HEIGHT
Floor Height Banner	48"	57"
	53"	62"
	64"	73"

*Installation at 3-Way, and 120° corner condition requires dismantling Panel Connector assemblies.

Another design consideration is the banner width. The desk height and the floor height banners are available in two widths for specific application needs.

	WORKSURFACE DEPTH	USE BANNER WIDTH
Desk Height Banner	24"	21"
	30"	27"


	WORKSURFACE DEPTH	USE BANNER WIDTH
Floor Height Banner	24"	21"
	30"	21"

	FREESTANDING STORAGE DEPTH	USE BANNER WIDTH
Floor Height Banner	18"	15"
	24"	21"

Notes

- Desk height banners have a 1" gap between the worksurface and the bottom of the banner when mounted on a 29" high worksurface.
- The floor height banner bottom will be 6 ¾" above the finished floor; visually lines up with the top of the base raceway or top of connector sleeve for open base panel.
- Banners are non-load bearing.

Visual Privacy Elements and Up-Mount Storage Units

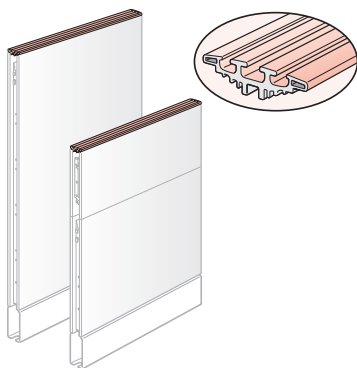


Grooved Top Cap

The Grooved Top Cap has three channels for attaching components. The center channel is for Toppers, Canopies and the Jump Stuff Ambient Light. The outer channels are used for attaching off-modular overhead storage units and the off-modular T-Mount kit. For cost effective applications remember you may layer components along the Grooved Top Cap.

If the OSU units were off-modular you may want Toppers behind them depending on the frequency of off-modular component relocation.

How you layer components along the Grooved Top Cap is often an aesthetic choice. Plan these components with the design and project needs in mind.

As shown in this application when using up-mount on modular Overhead Storage Units in an off-set back-to-back condition it is not necessary to use Toppers behind the OSU.

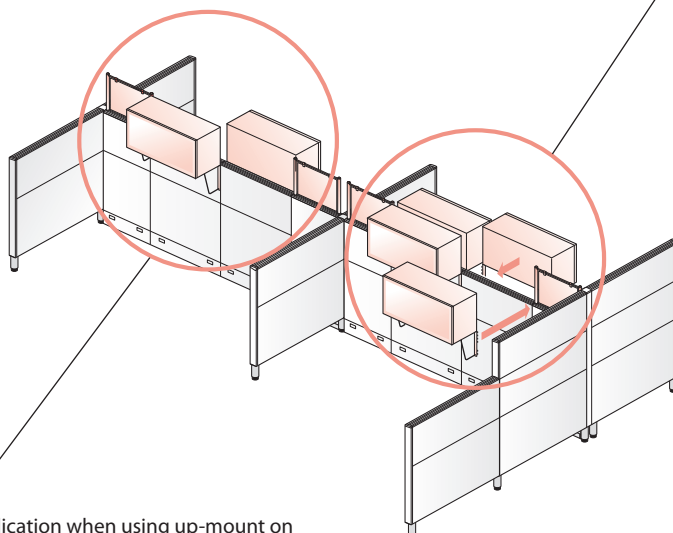

As shown in this application when using up-mount on modular Overhead Storage Units it is not necessary to use Toppers behind the OSU.

Tip

Refer to Product Application: Overhead Storage Units section for additional specification detail.


Support and Load Guidelines

Horizontal Support

PREMISE panel runs require return structures and attached floor-supported components for proper support. The required support structure type and frequency depends on panel and component configurations. All panel configurations — Monolithic and stackable — are covered by these guidelines, except as noted.

Unloaded Conditions: Panels without Components (Unbalanced)

A straight run of panels can be up to 12' (3658mm) long when supported at each end by a minimum 36" (914mm)-wide Return Panel. Return Panels must be the same height as the panel run. The back side of the maximum 12' panel run is limited to a single 10" or 16" slat pad per panel and the top of the pad may not exceed 64"

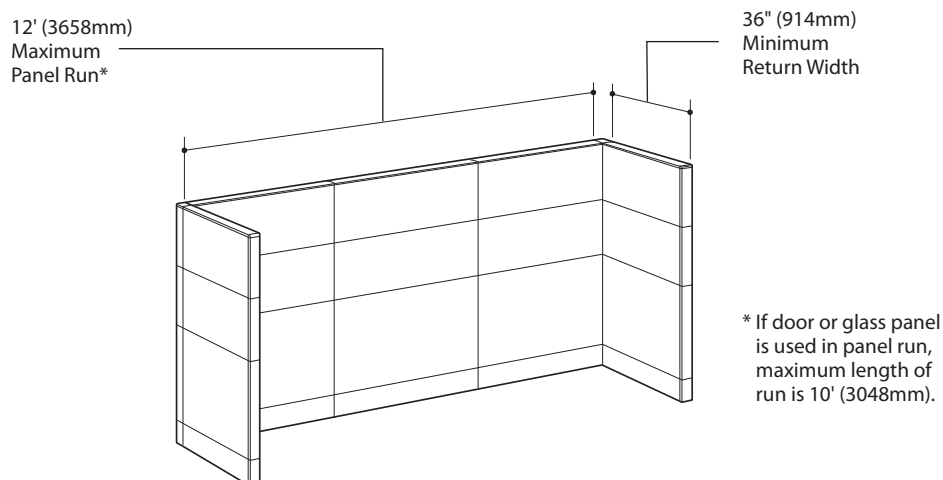


Note Wing Walls may replace Return Panels, however, the widths must increase as follows:

- For 80" (2032mm)-high panel runs the Winged Wall width must be 48" (1219mm)
- For panel runs 64" (1626mm) or less the minimum return width is 36" (914mm).

Unloaded Conditions: Panels without Components (Balanced)

A straight run of panels can be up to 12' (3658mm) long when supported at each end by two return panels — as long as all four Return Panel heights are within 48" (1219mm) of the panel run height. In this case, the Return Panel widths can be reduced to 18" (457mm).

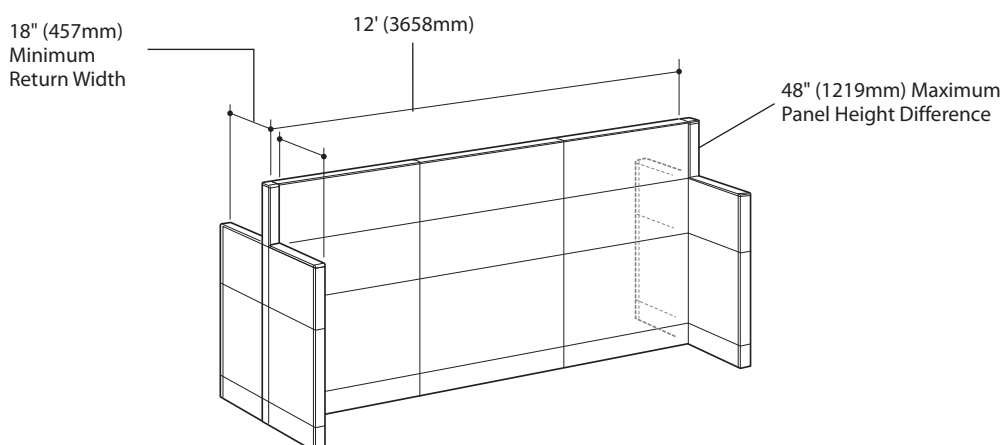


Note Wing Walls may be substituted for Return Panels.



This configuration is typically used for freestanding panel wrap applications, i.e., surrounding Lateral Files and Credenzas.

Support and Load Guidelines


Longer panel runs can be created by attaching a 60" (1524mm)-wide panel to the opposite side of the Return Panels in a T-Mount or 3-Way intersection.

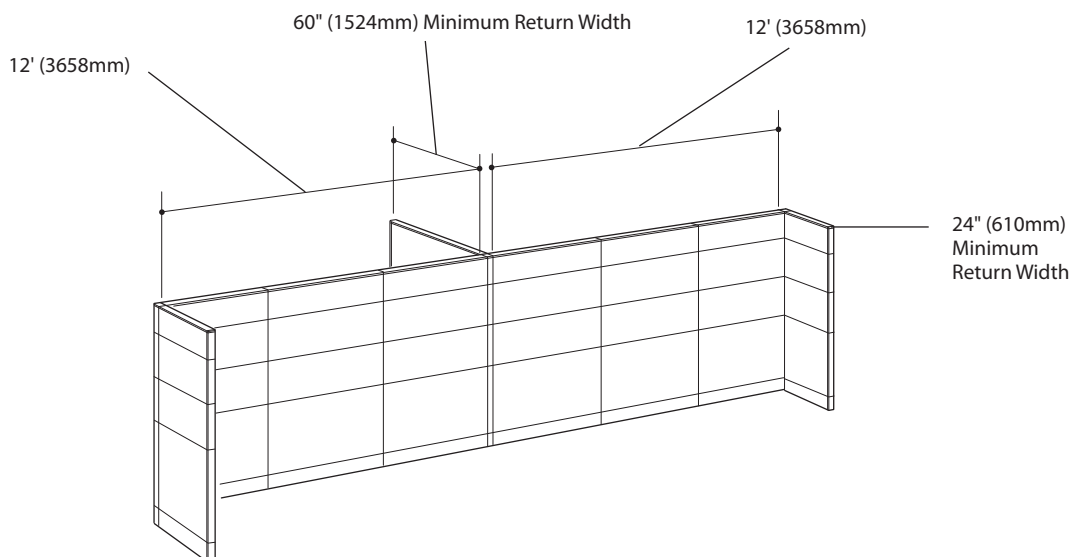

Tip This application is used to create long, uninterrupted panel runs (on one side) for large private offices and conference rooms.

Note Wing Walls may be substituted for Return Panels.

Perpendicular to a panel run, the maximum run may not exceed 8' (2438mm) without an additional return support.

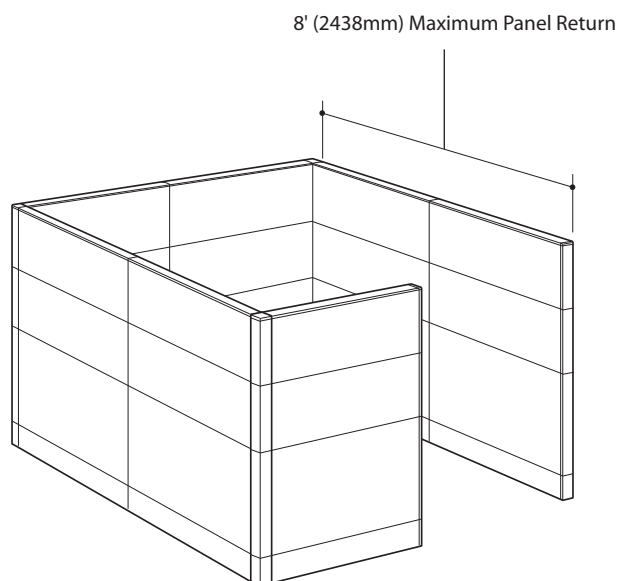


Support and Load Guidelines

Loaded Conditions: Panels with Components


A straight run of panels with components can be up to 10' (3048mm) long:

- When supported at each end by a minimum 18" (457mm)-wide Return Panel in balanced conditions **or**
- When supported by a minimum 24" (610mm)-wide Return Panel in unbalanced conditions

Balanced Condition

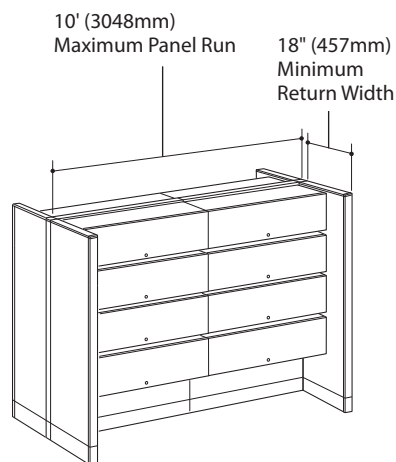

Unbalanced Condition

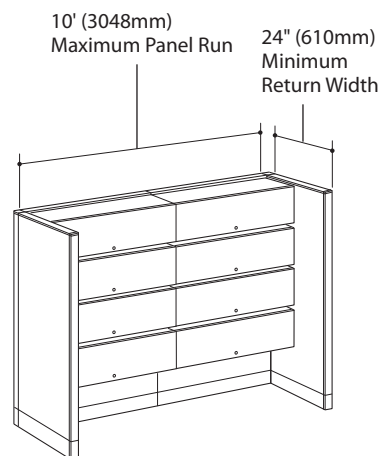


A maximum of four rows of Overhead Storage Units or shelves may be used. Of the four, a maximum of two Overhead Storage Units or shelves can be mounted on Upper Structure Elements in a panel configuration.

Notes


- Foundation Elements and Upper Structure Elements are load-bearing up to 80" (2032mm).
- A shelf gang clip is required for each row of shelves when more than one row of shelves is mounted to the system in an unbalanced configuration.
- Wing Walls may be substituted for Return Panels.

Support and Load Guidelines


A straight run of panels with components can also be up to 15' (4572mm) long when supported at each end by a minimum 24" (610mm)-wide Return Panel and one of the floor-supported components shown below:

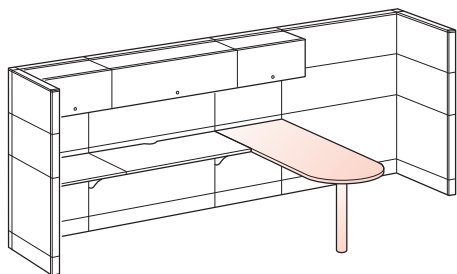

Convergent Worksurface with Support Column and one or more Shared Cantilever Brackets under the convergent and adjacent worksurfaces.

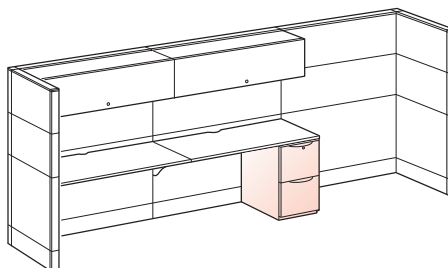

Attached pedestal with pedestal-to-panel bracket.

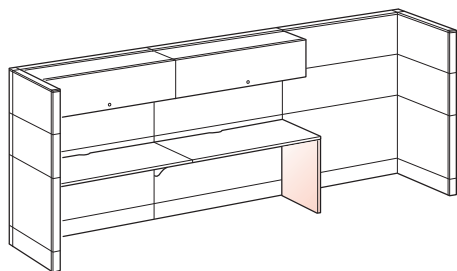


Worksurface supported by a worksurface end panel or Winged Wall.

Notes

- Wing Walls may be substituted for Return Panels.
- Maximum run of overheads may not exceed 10 feet.

When a panel run is supported by a Full-Height Return Panel on one end and an attached pedestal with pedestal to panel bracket or a worksurface end panel, Winged Wall, or panel mounted worksurface support leg and panel mounted on the other end, the panel run can be up to 10' (3048mm) long. Full-Height Panel Connectors must be used in the application.


24" (610mm) Minimum
Return Panel Width



In an unbalanced condition, a maximum of one row of Overhead Storage Units may be placed above the floor-supported worksurface.

Attached pedestals must be attached with pedestal-to-panel brackets when Overhead Storage Units are supported as shown (in unbalanced or balanced conditions).


18" (457mm) Minimum
Return Panel Width

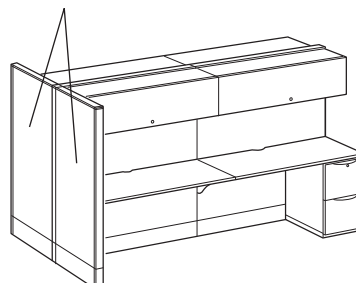

In a balanced condition, the Return Panel and worksurface width can be reduced to 18" (457mm).

Support and Load Guidelines


A panel run must be supported by a Return Panel on both ends when using up-mount overheads, the panel run can be up to 10' long.

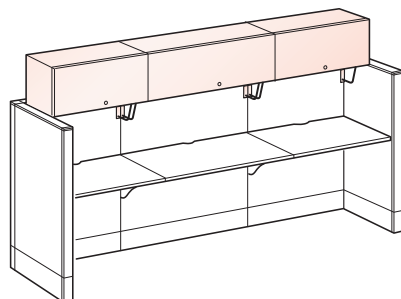


- Spine and Return Panels must be same height on each end.
- Return Panel may be up to 16" lower than the top of the Up-Mount overhead storage unit.

Note Wing Walls may be substituted for Return Panels.

When a panel with Overhead Storage Units are used in conjunction with adjustable height surfaces, worksurface end panels may be required.

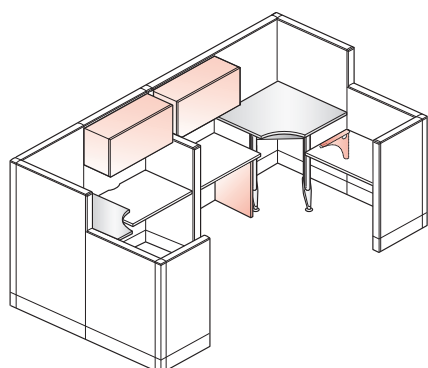


In an unbalanced condition, add a worksurface end panel to support one end of worksurface below the overhead

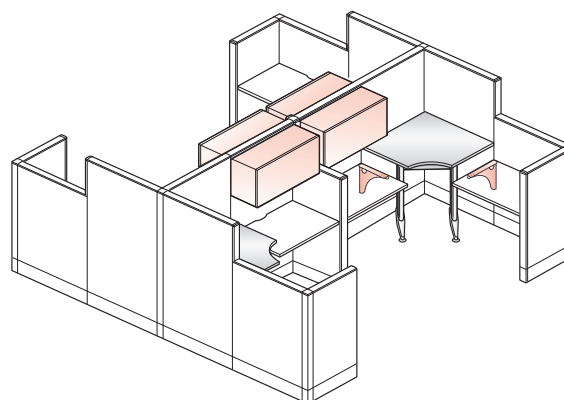

In a balanced condition, use of worksurface end panel is optional

Anti-Dislodgement Bracket

A panel run can extend 10 feet when supported by a Worksurface Support Panel at each end combined with anti-dislodgement brackets and worksurfaces.

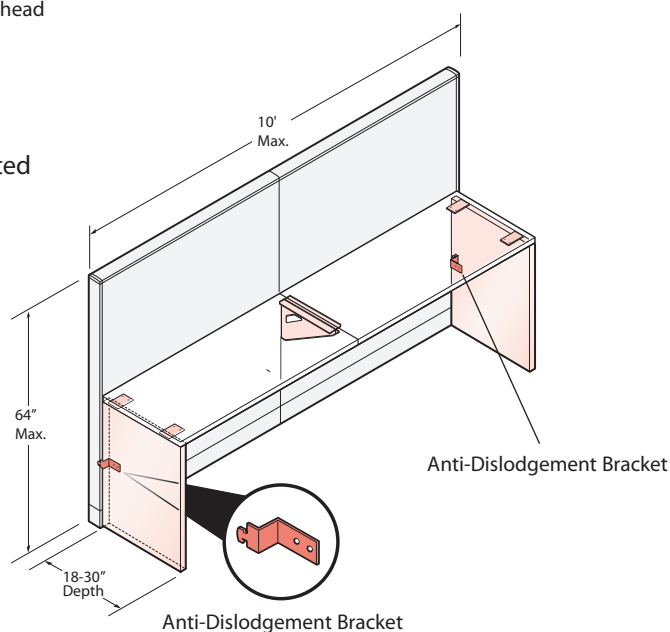

Note Attaching standard depth shelves/overheads with this application is not recommended.

Support and Load Guidelines


Vertical Support

Guidelines for loading panel-hung components are based on the total panel configuration height created by the foundation and Upper Structure Elements. Proper panel support and load guidelines must be followed when designing with panel-hung components. Components hang from the 1" (25mm) incremental slots in the Panel Connector. This shared Panel Connector allows side-by-side mounting of all panel-hung components.

Component Mounting Space


PANEL HEIGHT:	AVAILABLE MOUNTING SPACE:
32" (813mm)	24" (610mm)
42" (1067mm)	34" (864mm)
48" (1219mm)	40" (1016mm)
52" (1321mm)	44" (1118mm)
53" (1346mm)	45" (1143mm)
58" (1473mm)	50" (1270mm)
63" (1600mm)	55" (1397mm)
64" (1626mm)	56" (1422mm)
68" (1727mm)	60" (1524mm)
69" (1753mm)	61" (1549mm)
74" (1880mm)	66" (1676mm)
79" (2032mm)	71" (1803mm)
80" (2032mm)	72" (1829mm)

Tip Panel-hung components cannot be mounted above 80" (2032mm).




32" (813mm)-high panel configurations can support:

- One worksurface



42" (1067mm)-high panel configurations can support:


- One worksurface and counter top




48" (1219mm)-high panel configurations can support:

- One worksurface with shelf


52" (1321mm)-high, 53" (1346mm)-high, and 58" (1473mm)-high panel configurations can support:



- Three shelves




- Two Overhead Storage Units

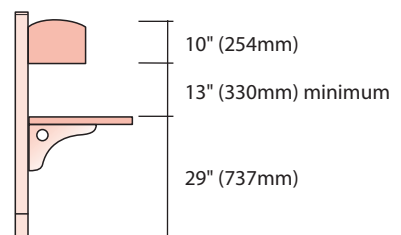


- One worksurface and one shelf

Support and Load Guidelines


63" (1600mm)-high, 64" (1626mm)-high, 68" (1727mm)-high, 69" (1753mm)-high, and 74" (1880mm)-high panel configurations can support:




- Four shelves



- Three Overhead Storage Units



- Two shelves/Overhead Storage Units, one worksurface and one freestanding two-high Lateral File/storage unit




- One worksurface and one shelf/Overhead Storage Unit


Note

A maximum of four rows of Overhead Storage Units or shelves may be used. Of the four, a maximum of two Overhead Storage Units or shelves can be mounted on Upper Structure Elements in a panel configuration.


79" (2032mm) and 80" (2032mm)-high panel configurations can support:

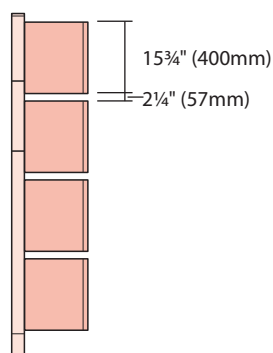

- Four shelves/Overhead Storage Units or

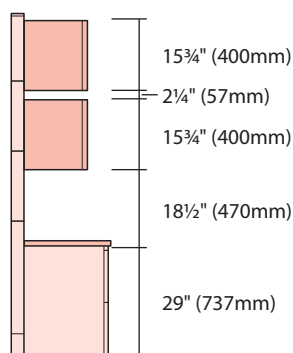

- Two overhead storage units and one freestanding Lateral File/storage unit

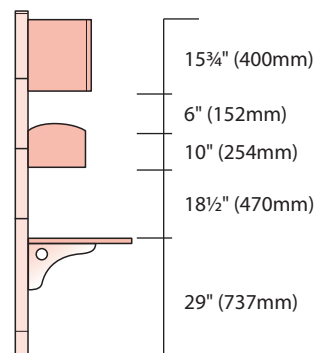


- One worksurface and two shelves/Overhead Storage Units

Note

Up-mount applications not recommended for these panel configurations. Refer to up-mount application pages.


Support and Load Guidelines



Heavy load bar for Monolithic Panels: not to be used with glazed panels, doors or Upper Structure Elements.


Heavy Load Stabilizer Bar for Monolithic Panels

A heavy load stabilizer bar is supplied with every 80" (2032mm)-high fabric panel that is 42" (1067mm), 48" (1219mm) or 60" (1524mm)-wide. The bar can be used to add rigidity to straight in-line junctions of heavily loaded fabric panels. Additional bars can be specified separately for use with other standard panel heights. Order part number NSB-1.



Heavy Load Stabilizer Bar for Stack Kits

- Provides additional stability between two Stack Kits or stack pads at the same height in an in-line condition.
- Recommended for additional stability in off-modular applications.



Adaptable Overhead/Shelf Gang Clip


An overhead/shelf gang clip is required for each row of Overhead Storage Units or shelves when more than one row of Overhead Storage Units or shelves are mounted to the system in an unbalanced configuration.

Support and Load Guidelines: Wall Track


Wall Track offers the option of hanging components on a structural wall without panels or in combination with panels. Wall Track is designed to support Worksurfaces, Shelves, Overhead Storage Units and task organization products. Wall Track is two-sided with each side offering 1"(25mm) incremental slots and functions the same as the component attachment slots in the PREMISE Panel Connector.

The Wall Track has two-sided slotting that provides different mounting functions on each side. Side One of the Wall Track has slotting to accommodate two components side-by-side in a shared condition. Side Two accommodates single-end component mounting. The single-end component mounting allows positioning the Wall Track flush with the edge of the component. When used in an end condition, Wall Track does not add any additional width dimension to the overall component width. Two 60" wide Overhead Storage Units can be placed in a 10' wide room on the two-sided Wall Track.

Side One

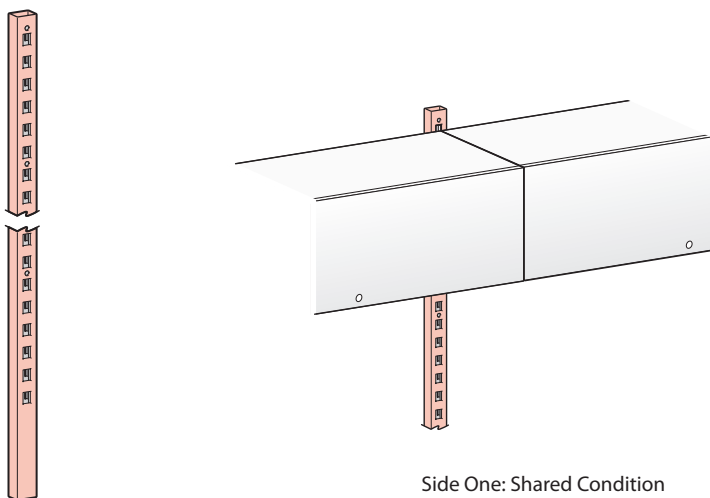

Side Two

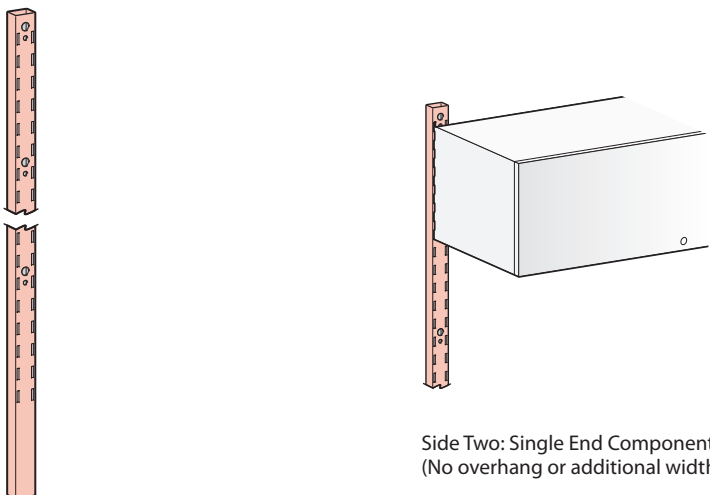

Tip

- Consider specifying Wall Mount Components for cleaner aesthetic.
- Wall Track requires the proper structural wall for support.


Support and Load Guidelines: Wall Track

Guidelines for Planning with Wall Track:

- When used in an end condition, Wall Track does not add any additional width to the overall component width.


Wall Track Application: Up to 60" Wide

- Wall Track Worksurface Applications 60" wide or less require Worksurface Floor Support on one end and a Standard Cantilever Bracket required on the other end.

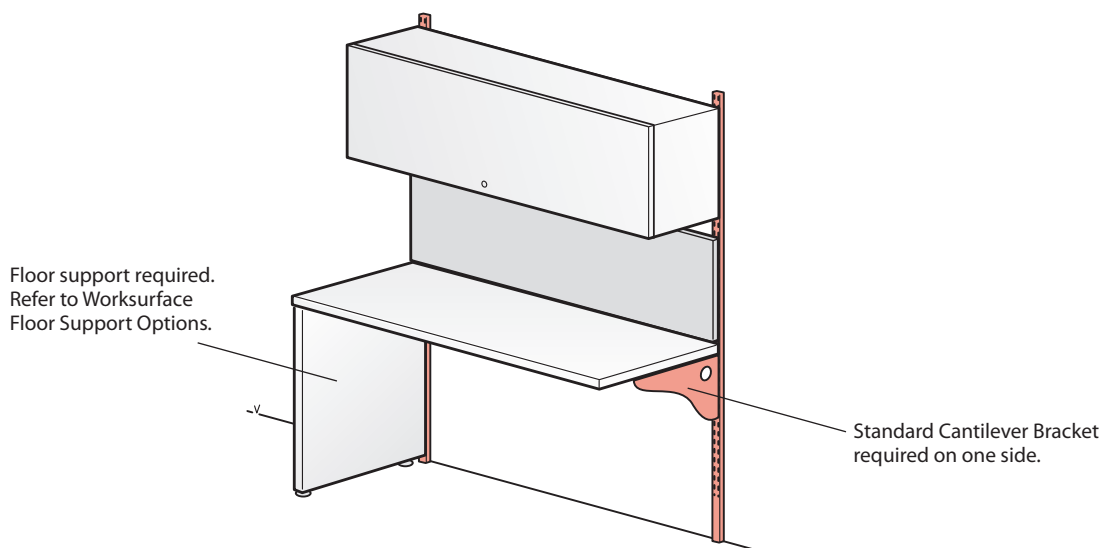


Wall Track Application: Up to 60"-120" Wide

- Wall Track Worksurface Applications greater than 60" wide require Floor Support on both ends of the application.
- Standard Shared Cantilever Bracket is required for mid-support location.

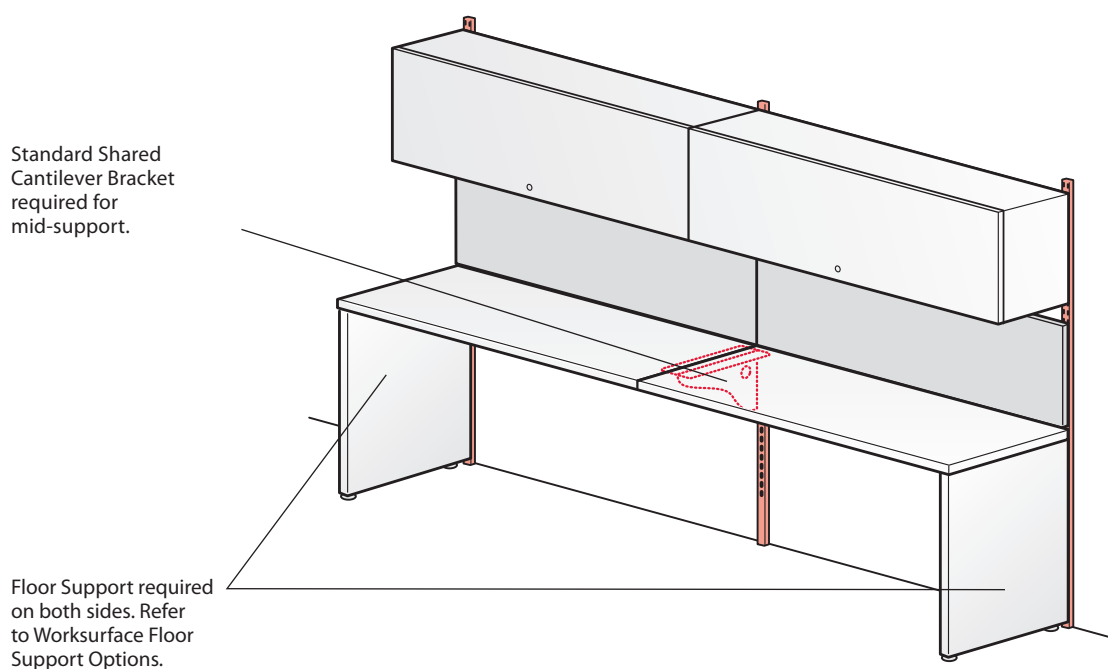

Support and Load Guidelines: Wall Mount Overhead Storage Unit




Wall Mount Overhead
Storage Unit
UUFS - 16 _ _ _ W _ _

The Wall Mount Overhead Storage Unit is installed directly onto a structural wall instead of specifying vertical Wall Track that goes to the floor.

Wall Mount Overhead Storage Unit


- Available with Flipper Door, Cabinet Door or Single Slider door.
- Available with Painted, Translucent, Laminate or Wood Front.
- Available Locking or Non-locking.
- Flipper Doors available with Slow-Close Mechanism.
- Accepts separately specified Adaptable Task Lights.
- Wall Mount Overhead Storage Unit cannot be retrofitted for installation on a panel.
- Wall Mount Overhead Storage Unit does not have a back. When the overhead is open the wall behind it will be exposed unless the optional back is specified.

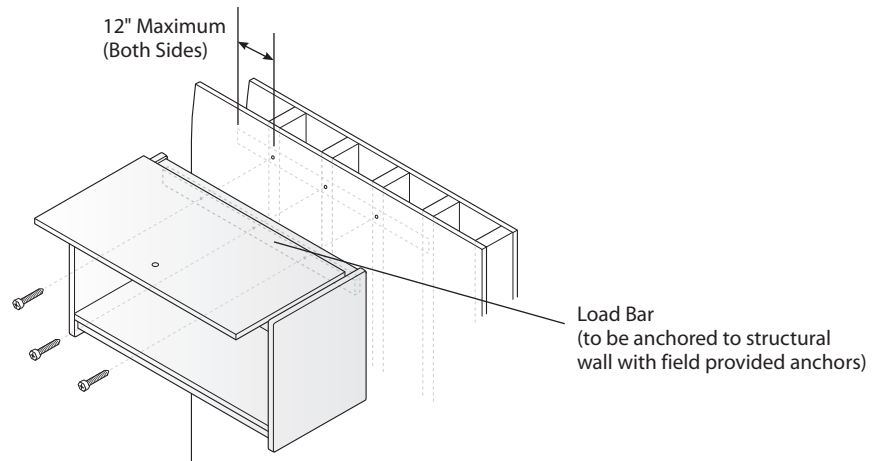

- Load Bar attached to structural wall supports the Wall Mount Overhead Storage Unit creating a clean visual aesthetic with no exposed hardware on the exterior.

Optional Back for Wall Mount Overhead Storage Unit

- Used to cover the back of Load Bar and wall; separately specified.



Tips


- Wall Mount Overhead Storage Unit cannot be retrofitted for installation on a panel.
- Wall Mount Overhead Storage Unit does not have a back. When the overhead is open the wall behind it will be exposed unless the optional back is specified.

Support and Load Guidelines: Wall Mount Components


When selecting components for use in structural wall applications, one option is a Wall Mount component. Wall Mount components attach directly to the structural wall and do not use vertical Wall Track which is visible on the wall.

Wall Mount Tackboard/Markerboard/Slat

- The Wall Mount Tackboard, Markerboard, and Slat are anchored onto the structural wall using Wall Mount Brackets located on the back
- Wall Mount Brackets for the Tackboard and Markerboard are the same
- Wall Mount Brackets for the Slat are deeper to accommodate cord management behind the Slat
- Wall Mount Brackets are installed into the structural wall and the Wall Mount Tackboard, Markerboard, and Slat rest on these brackets
- Wall Mount components cannot be retrofitted for installation on a panel
- Wall Mount Markerboard will not allow Task Light cord to pass behind it
- Wall Mount Slat offers space behind it for Task Light cord routing

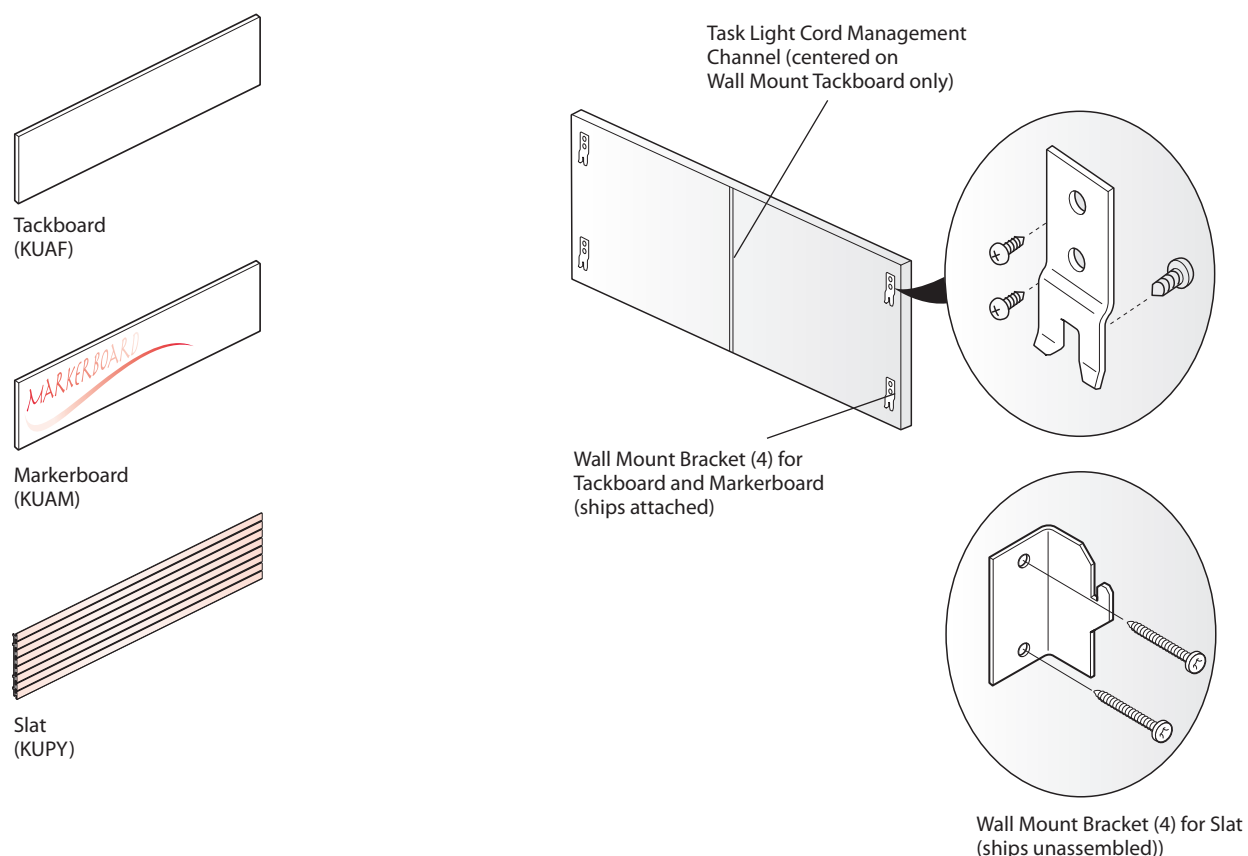

Understanding Wall Mount Tackboard with Adaptable Task Light:

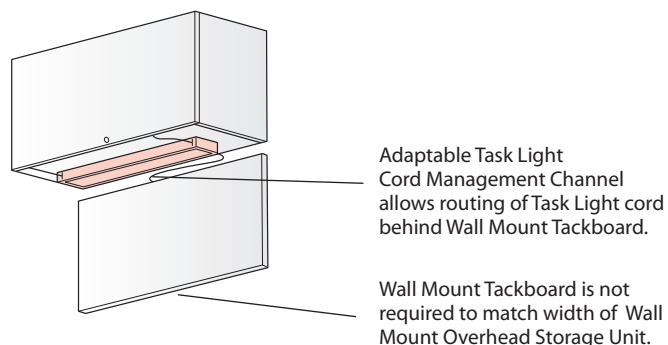


Support and Load Guidelines: Worksurface Wall Bracket

- When specifying Wall Mount Components, a Worksurface Wall Bracket must be used with lower support that attaches a worksurface to a structural wall, giving a cleaner aesthetic versus Wall Track.
- The Worksurface Wall Bracket is also used to attach a Worksurface Support Panel to Structural Wall Applications.


When specifying or planning with the Worksurface Wall Bracket, it is important to understand these application rules:

1. In applications with a worksurface adjacent to a wall:
 - 24" – 42" wide worksurfaces require two Worksurface Wall Brackets
 - 48" – 78" wide worksurfaces require three Worksurface Wall Brackets
 - 84" – 120" wide worksurfaces require four Worksurface Wall Brackets
2. In Worksurface Wall Bracket Applications, a worksurface may not be supported by only Worksurface Wall Brackets and Flush Mount Plates. They require floor support at specific locations. Refer to Group A Floor Support Options.
3. A Worksurface Wall Bracket cannot exceed 16" from either end of a worksurface, or be more than 24" from another Worksurface Wall Bracket or Floor Support.

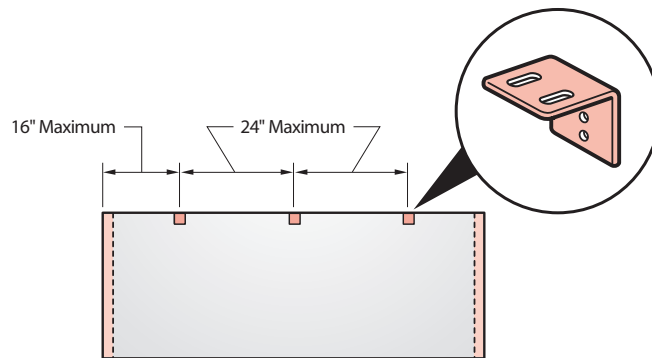


When using the Worksurface Wall Bracket, proper anchoring to a structural wall is required. Proper anchoring can include securing the Worksurface Wall Bracket to a stud or reinforcing the wall application with $\frac{3}{4}$ " plywood behind the wallboard. Directly securing the Worksurface Wall Bracket to wallboard will not provide proper structural support and is not recommended.

Recommended Structural Support

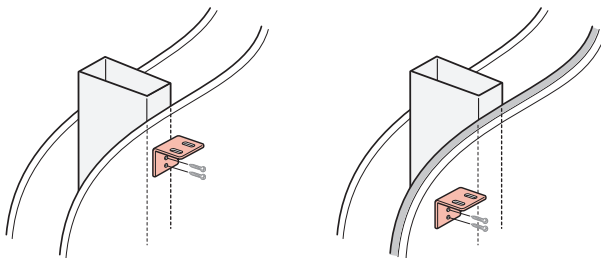


Not Recommended Structural Support




Tip Screws/anchors for attachment to structural wall are field supplied.

Support and Load Guidelines: Worksurface Wall Bracket


Group A Floor Support Options




Worksurface Support Panel with a Worksurface Wall Bracket*




Straight Leg Basic




Adjustable Height Disc Base




Double Support Leg or Freestanding Worksurface Support Leg




Attached Pedestal



Attached Lateral File




Support Column





Personal Storage Tower to Worksurface Bracket

* Worksurface Support Panels must be secured to the structural wall with a Worksurface Wall Bracket which must be a minimum of 5" from the top of the Worksurface Support Panel. A Worksurface Support Panel may be up to 6" or less than the depth of the worksurface.

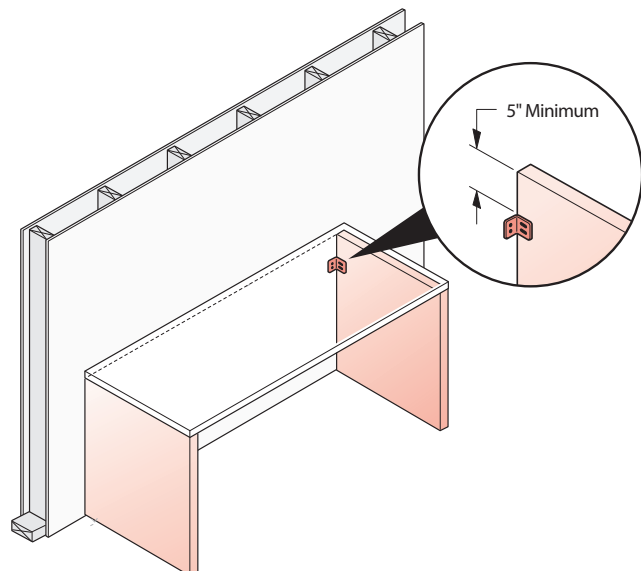


Application Guidelines: Worksurface Wall Bracket


Requirements for a Straight Worksurface Application with One Worksurface

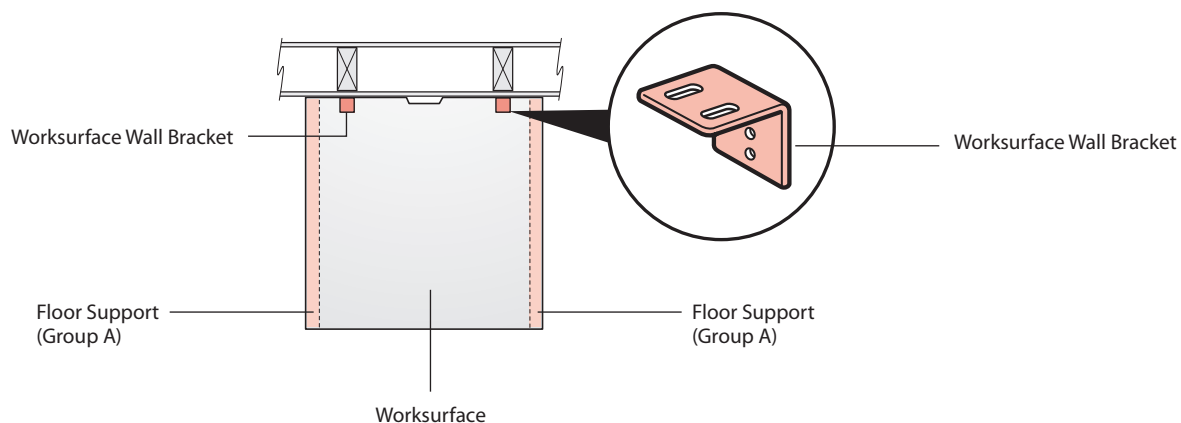


24" Wide Worksurface




42" Wide Worksurface




48" Wide Worksurface

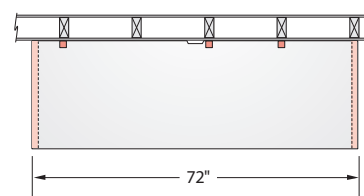


72" Wide Worksurface

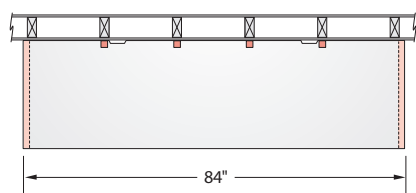

84" Wide Worksurface

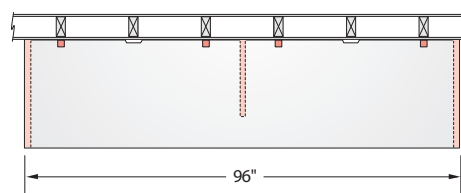



96" Wide Worksurface

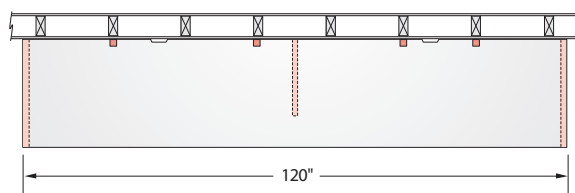


120" Wide Worksurface

Application Guidelines: Worksurface Wall Bracket


Requirements for a Straight Worksurface Application with Multiple Worksurfaces

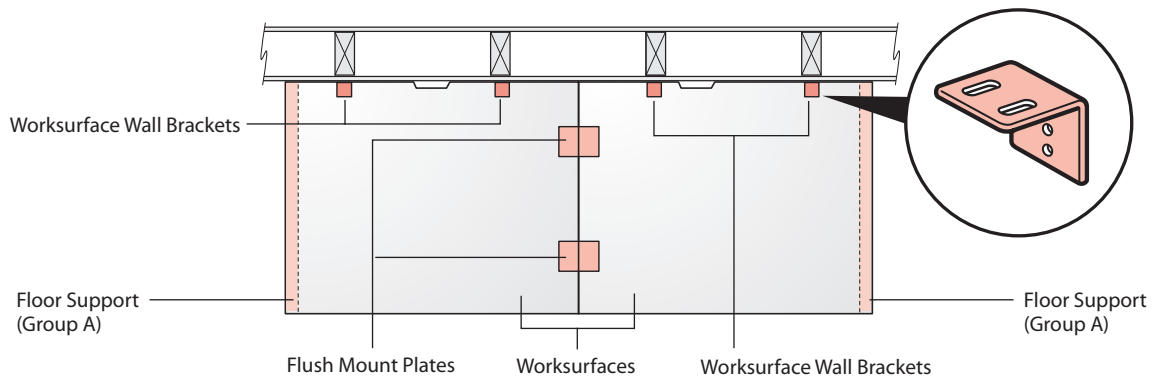


48" Wide Worksurface Application:
Two 24" Wide Worksurfaces

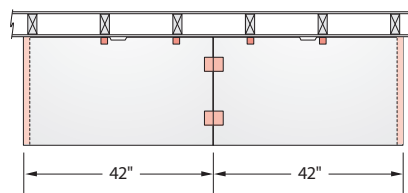

84" Wide Worksurface:
Two 42" Wide Worksurfaces

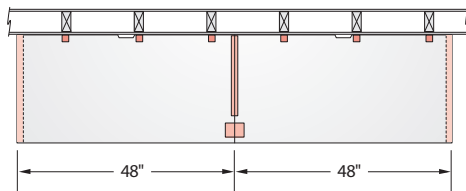


96" Wide Worksurface:
Two 48" Wide Worksurfaces

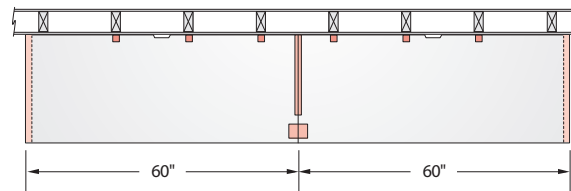

120" Wide Worksurface:
Two 60" Wide Worksurfaces


72" Wide Worksurface

Option A

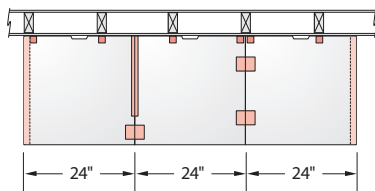

72" Wide Worksurface Application:
Three 24" Wide Worksurfaces


Option B

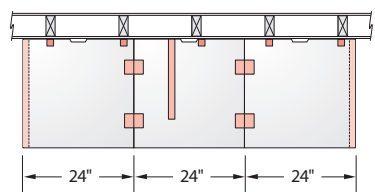

72" Wide Worksurface Application:
Three 24" Wide Worksurfaces


144" Wide Worksurface

Option A

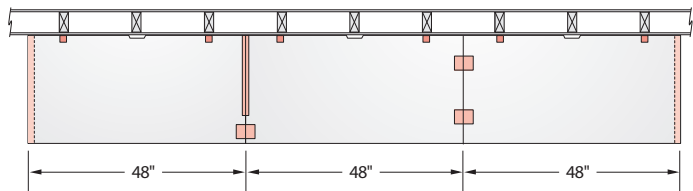

144" Wide Worksurface Application:
Three 48" Wide Worksurfaces






Option B

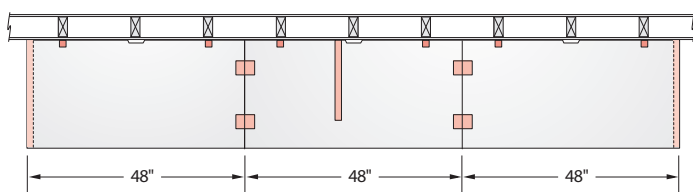

144" Wide Worksurface Application:
Three 48" Wide Worksurfaces






Application Guidelines: Worksurface Wall Bracket

Requirements for a Structural Wall Corner Application

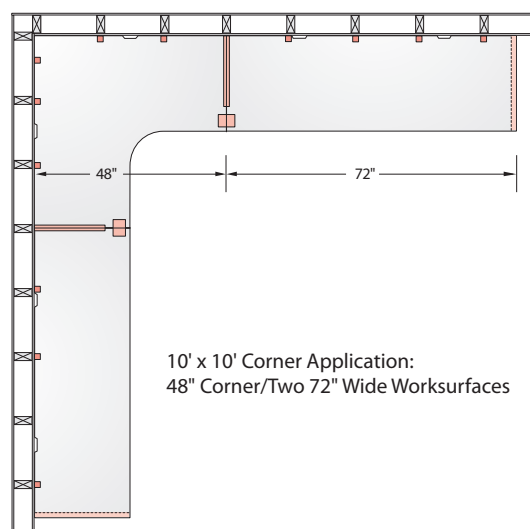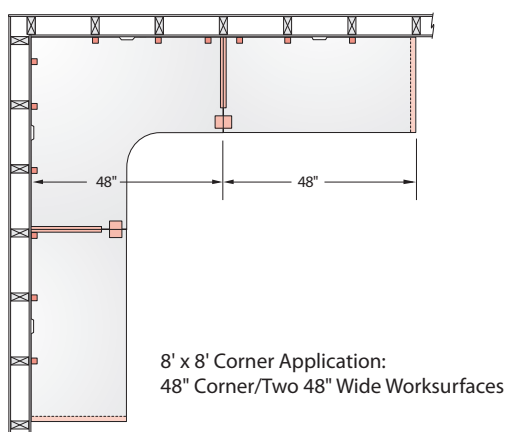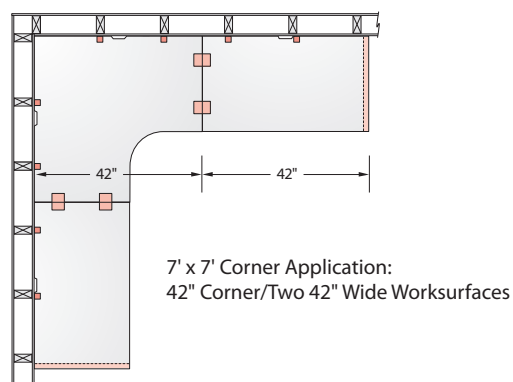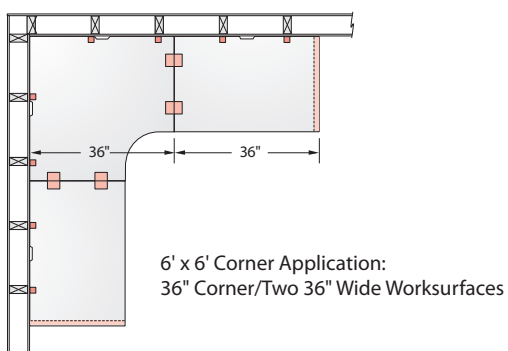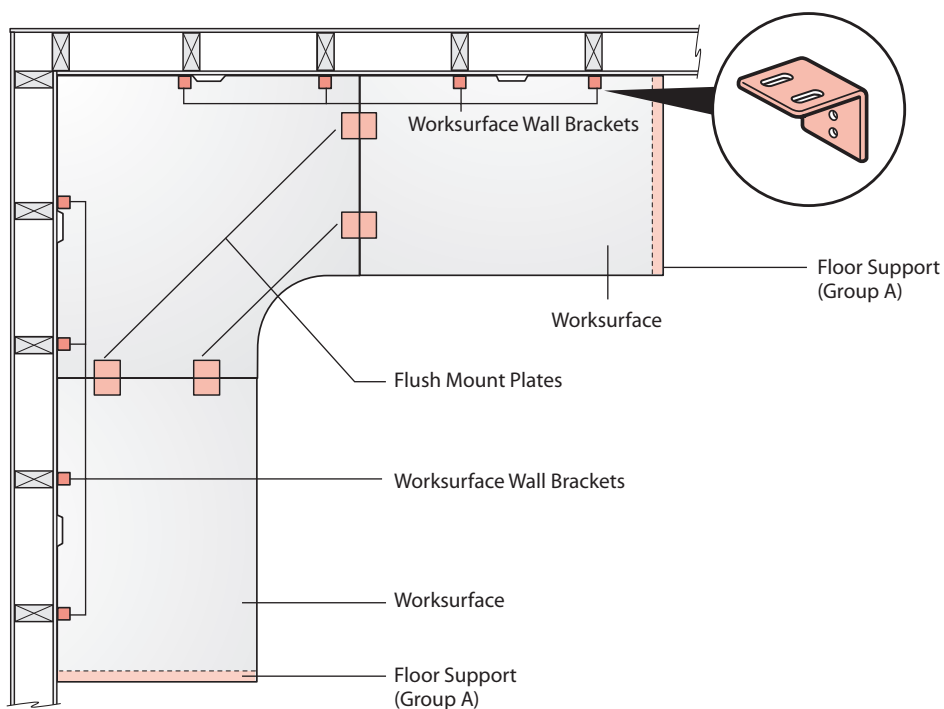

Application Guidelines: Worksurface Wall Bracket

Requirements for a Corner Workstation Application with a Wall Mount Return Panel Run

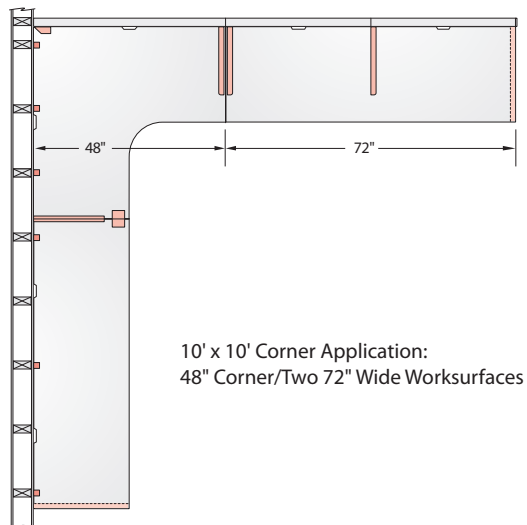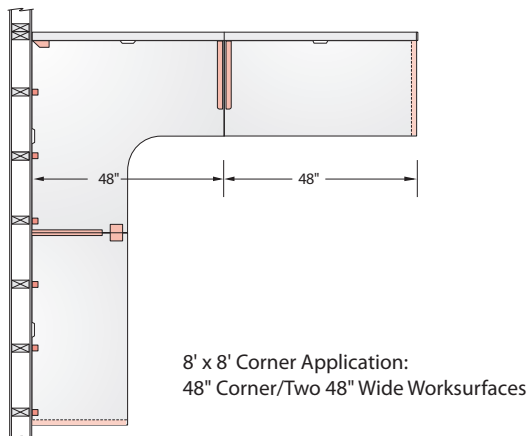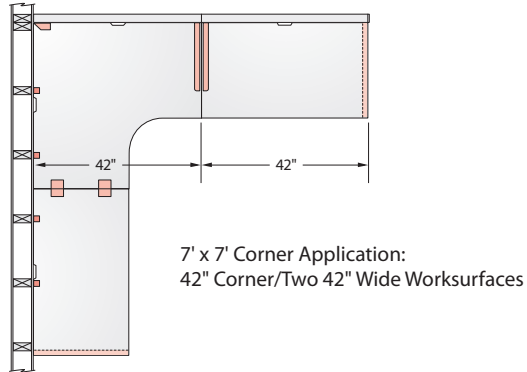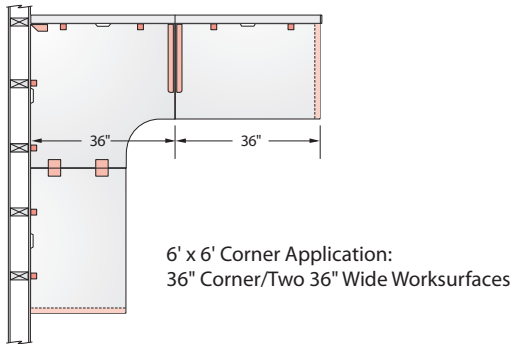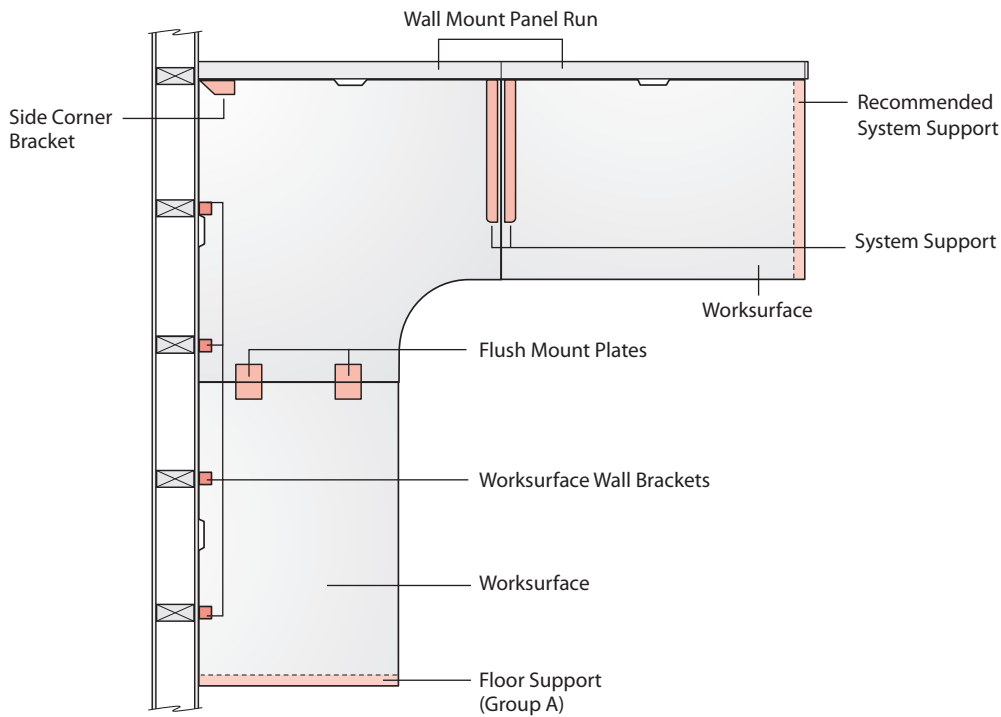

This page intentionally left blank.




Power and Cable Management

Power and Communication: Introduction


The PREMISE system accommodates all power and cable management needs through the Power Base electrical distribution system and multiple cable pathways. Power Base is a modular electrical system available in the base raceway and at work-height (below worksurface, beltline, and standing height). Power Base is offered in 3-Circuit and 4-Circuit (2+2 or 3+1) configurations. Power Base components are designed to address three functions:

1. **In:** Routing power from the building into the furniture.
2. **Through:** Routing power through the furniture.
3. **Out:** Receptacle access at panel.

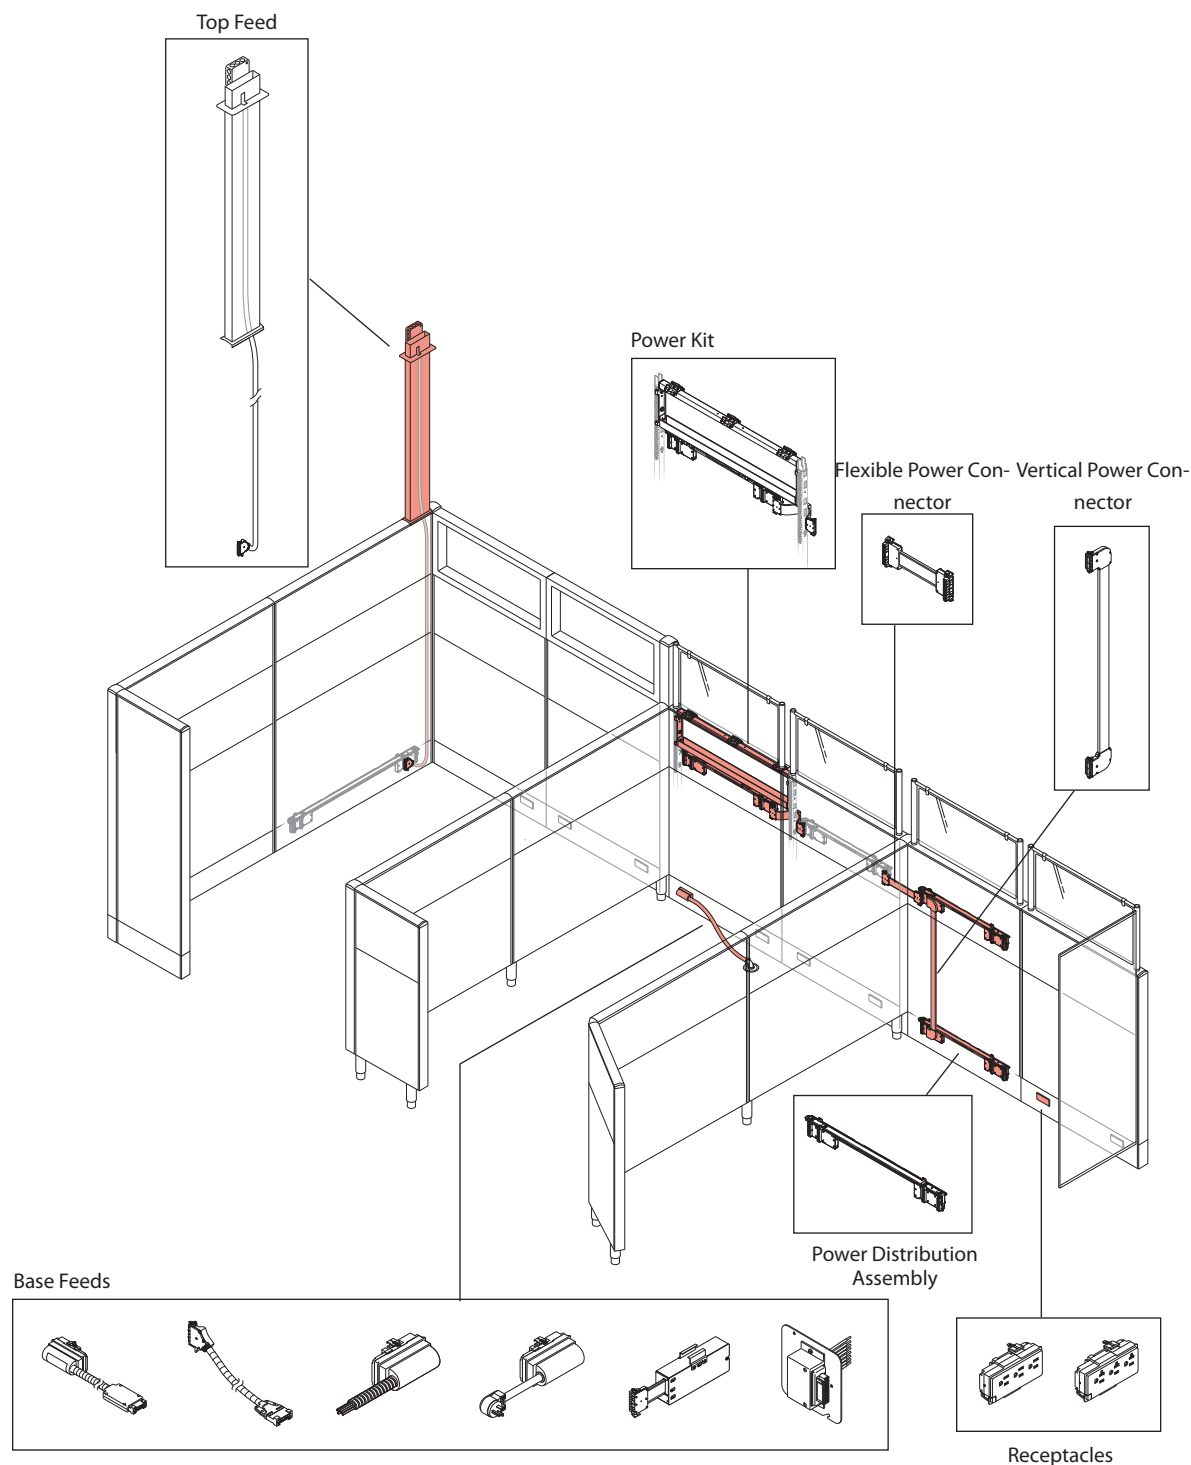


Power Statement of Line


In: Building to Panel




Base Feed Module:
Hardwire Connection




Single Circuit Base Feed Module:
Receptacle Connection
with Power Cord



Base Feed Module: Concealed
Hardwire Connection




Wall Feed Module:
Hardwire Connection



Power Base AI Feeds



Top Feed Module




Infeed Harness




External Top
Feed Module

Through: Power Distribution




Power Distribution Assembly



Flexible Power Connector




Vertical Power Connector




Extended Connector


Out: Receptacle Access




15 Amp Receptacle




20 Amp Receptacle




Desktop Port



Enhanced Power Module

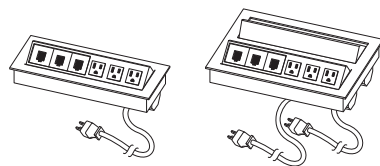

Flip Top Unit



Port Kit

Base Feed Modules

Base Feed Module: Hardwire Connection



The module is used to transition from building wiring to modular power within the furniture. One end is hardwired to building wiring and the modular end snaps into the power distribution assembly (PDA) in the base of the furniture.

Specification Tips

- For use with 24" – 60" (610mm – 1524mm) wide powered panels.
- Not for use with open base raceway panels.

Power Locations

- Floor
- Column
- Wall

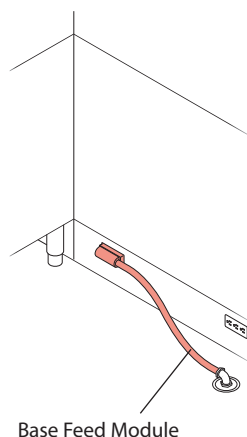

Single Circuit Base Feed Module: Receptacle Connection with Power Cord


The module is used to transition from building wiring to modular power within the base of the furniture. The cord end is plugged into a receptacle (NEMA 5-20R USA/NEMA 5-15R Canada) in the building and the modular end snaps into the power distribution assembly (PDA) in the furniture. Only circuit one is powered by a cord feed. This feed is used for small furniture clusters such as a reception desk. National codes restrict the length of the cord; 24" (610mm) in the United States, 72" (1829mm) in Canada.

Specification Tips


- For use with 24" – 60" (610mm – 1524mm) wide powered panels.
- Not for use with isolated ground receptacles.
- Not for use with open base raceway panels.

Power Locations

- Floor
- Column
- Wall



Column Cord Base Feed

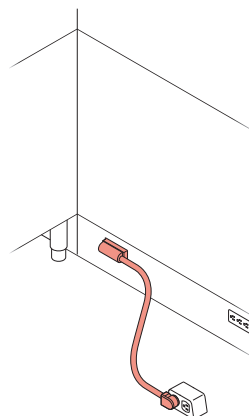

Base Feed Modules

Base Feed Module: Concealed Hardwire Connection



The module is used to transition building wiring to modular power within the furniture. The module's junction box is mounted to the furniture and its modular connector snaps into the power distribution assembly (PDA). Field supplied conduit is used to bring power from the building to the junction box allowing for some versatile applications. Although used primarily to meet New York City code requirements for a base fed infeed, it is not limited for use in this locale.

Specification Tips

- For use with 36" – 60" (914mm – 1524mm) wide powered panels.
- Not for use with open base raceway panels.

Power Locations

- Floor
- Column
- Wall

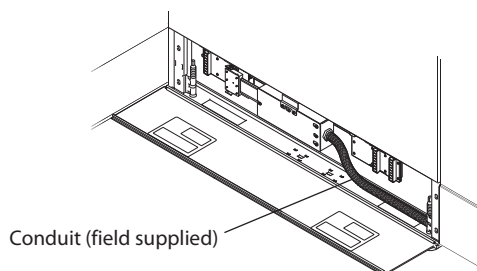

Note New York City code compliant.

Raised Floor Infeed Base Feed Module: External and Internal

These modules are used to make plug-and-play connections between Power Base AI underfloor modular power and Power Base modular power in furniture. Internal version can enter under the panel base so base feed is not visible. The conduit of the external version will be exposed, but allows flexibility in positioning the furniture.


Specification Tips

- For use with 24" – 60" (610mm – 1524mm) wide powered panels.
- Not for use with open base raceway panels.
- Can only be connected to Power Base AI underfloor power system.
- Black split tubing may be field supplied to cover any exposed galvanized metal conduit.


Power Location

- Power Base AI


External Base Feed

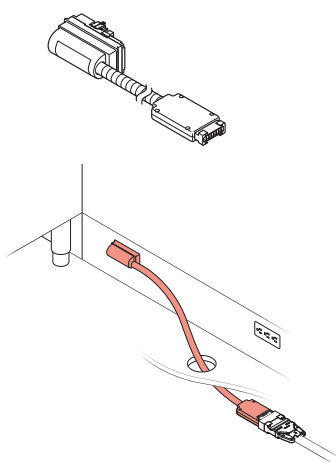

Internal Base Feed

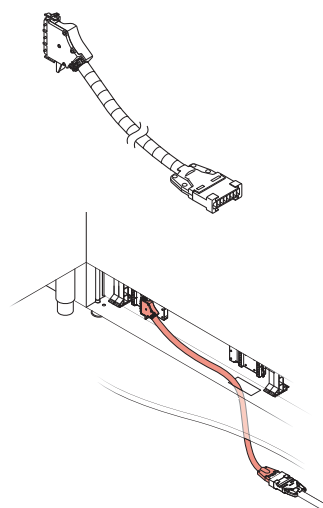

Wall Feed

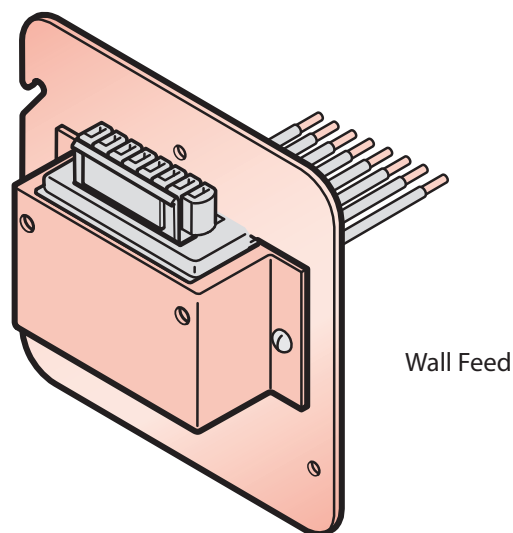

Overview

- Modular connector with latch mounted to 4-11/16" (119mm) steel plate
- Provides connection between 4-11/16" Junction box and modular power jumper
- Available in either 3 circuit/separate neutral or 4 circuit/shared neutral 8 wire configurations

Wall Feed

General Specification

- 20 Amp 120/208Y or 120/240V 60 Hertz rated circuits
- Constructed with 12 AWG wire (10 AWG for shared neutrals)
- Use to connect between 4-11/16" Junction box and modular power jumper
- 3 circuit system provides three phase conductors, three neutral conductors and two ground conductors
- 4 circuit system provides four phase conductors, two neutral conductors and two ground conductors

Listings

- UL listed manufactured wiring system rated for 20A 120V/208Y or 120/240V 60Hz per NEC Article 604.
- UL listed per UL 183 and CSA standard C22.2 No 203-M

Applicable Codes


- Wall Feed must be installed in accordance with the NEC, CEC and local electrical codes

Complementary Products

- Haworth Compose, PREMISE, and UniGroup panels systems, Tactics Tables or Enclose Movable Walls
- Haworth Power Base AI modular power for use below raised access floors such as Haworth TecCrete or above ceilings

Typical Configuration

- Transition from building hardwire and modular power
- Conversion of furniture top feed to modular connection

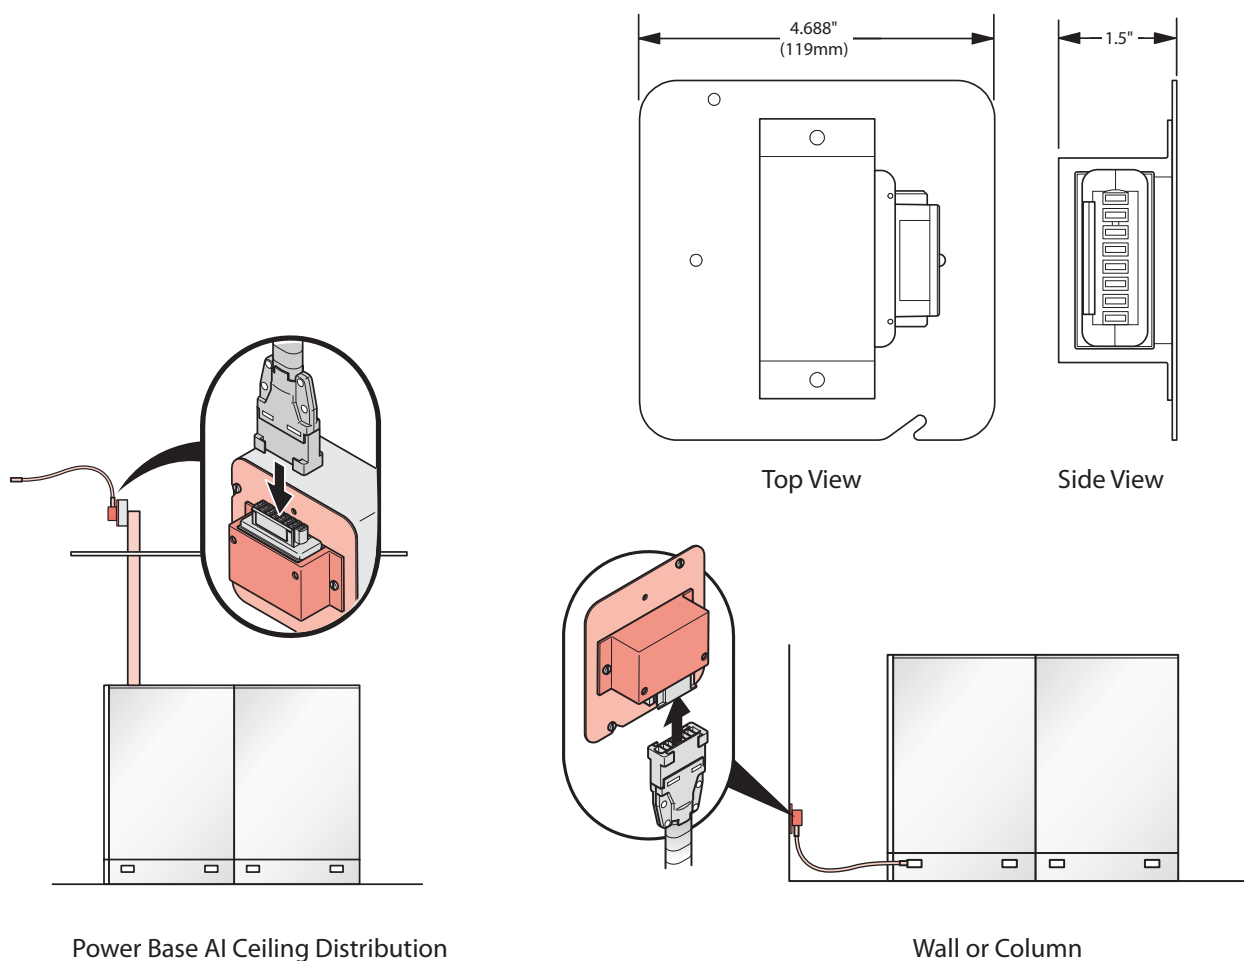


Top Feed Modules

Top Feeds are used to transition building wiring located in the ceiling to modular power within the furniture. One end is hardwired to a junction box and the modular end snaps into the power distribution assembly (PDA) in the panel.

Top Feeds with poles are used to span between ceiling and panels and are available with or without power harness for 10' or 12' ceiling heights. Floor-to-ceiling applications up to 10' route power through the panel and do not require a pole.

Application

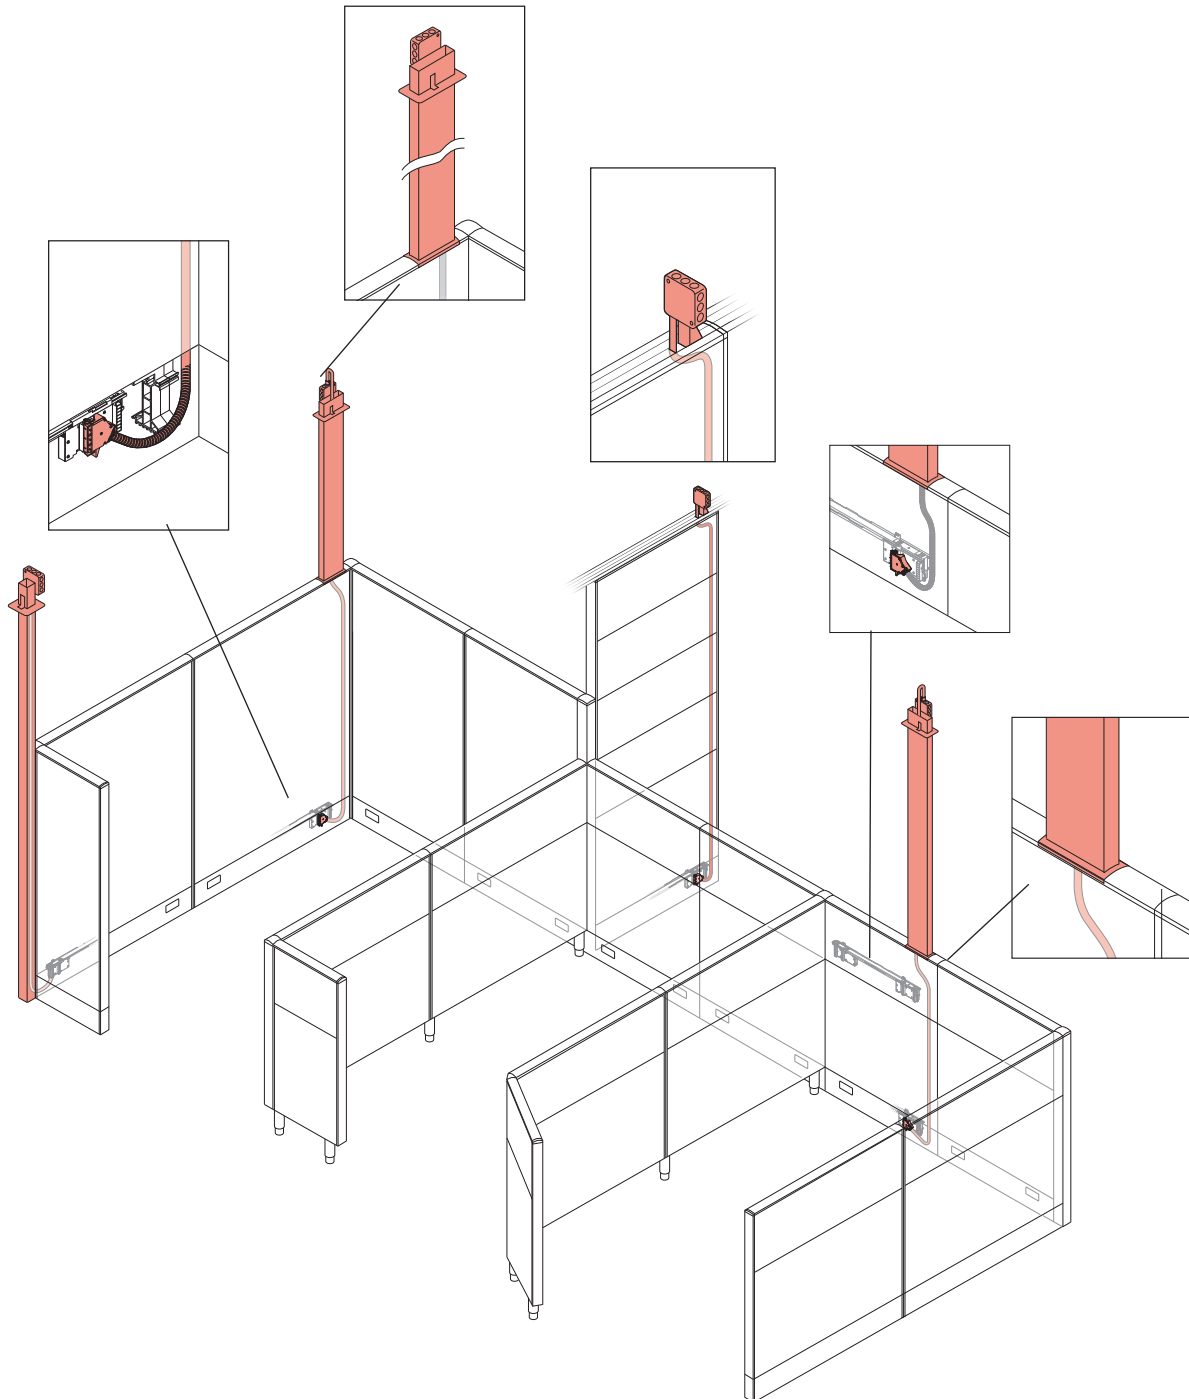

Note Refer to cable management section for more information about communication cable specification and planning.

Top Feed Modules

Monolithic Panel Top Feed



The module mounts to a fabric monolithic panel and routes power and communication cabling from the ceiling to the base raceway.

Specification Tips

- For use with 24" – 60" (610mm – 1524mm) wide powered panels.
- For use with 32" – 80" (813mm – 2032mm) high panels.
- Not for use with stackable panels.
- Not for use with glass or open base panels.
- Mounts 1½" (38mm) from the end of panel, field cutting of Top Cap is required.
- Wire harness length is 180" (4572mm) regardless of pole length.

Power Location

- 10' and 12' Ceilings

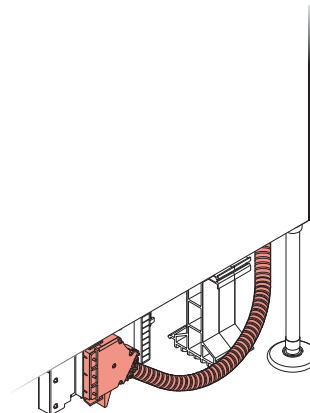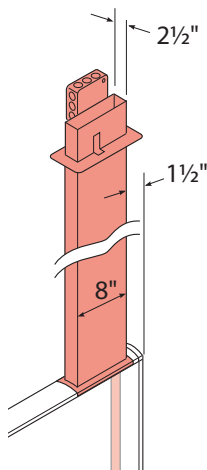

Monolithic Panel Base Connection

Stackable Panel Top Feed Module




The module mounts to a stack kit and routes power and communications cabling from the ceiling to the base raceway on Monolithic or Super Base panels. It can also route power to work heights in stack applications.

Specification Tips


- For use with 24" – 60" (610mm – 1524mm) wide powered panels.
- For use with 42" – 80" (1067mm – 2032mm) high panels.
- Not for use with glass, translucent, perforated or open stack kits.
- Not recommended for use on stack kits with structural crossbars.
- Mounts 53/8" (136mm) from the panel end, field cutting of the Top Cap is required.
- Wire harness length is 180" (4572mm) regardless of pole length.

Power Location

- 10' and 12' Ceilings

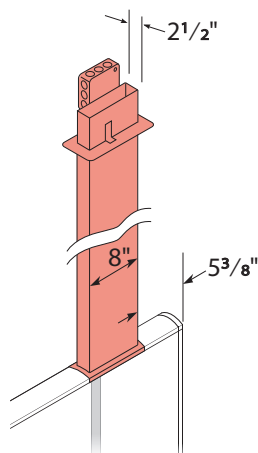

Work Height



Base Height

Top Feed Modules

External Top Feed Module


The module routes power and communications cabling from the ceiling to the base raceway with any panel configuration including Monolithic or Super Base powered panels with open or glazed stack kits.

Specification Tips


- For use with 24" – 60" (610mm – 1524mm) wide powered panels.
- For use with 32" – 80" (813mm – 2032mm) high panels.
- Can be used in end-of-run, 2-Way, and 3-Way conditions on any panel type.
- Wire harness length is 180" (4572mm).
- Pole is 3" x 3" (76mm x 76mm) square.

Power Location


- 10' Ceilings



Attaches to
Straight Connector




Separately Specify
3-Way Connector

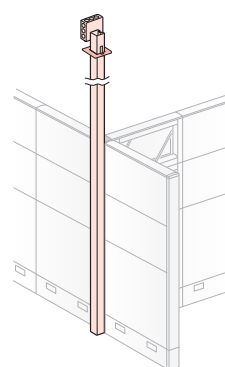


Separately Specify 4-Way Connector



End-of-Run



2-Way



3-Way

Top Feed Modules

Floor-to-Ceiling Monolithic and Super Base Panel Top Feed Module


The module mounts to floor-to-ceiling track and routes power from the ceiling to the base raceway on Monolithic or Super Base panels. The module can also route power to work heights in stack applications.

Specification Tips


- For use with 24" – 60" (610mm – 1524mm) wide powered panels.
- Not for use with glass, translucent, perforated, or open stack kits.
- Wire harness length is 180" (4572mm).

Power Location


- Stack panels up to 120" (3048mm) high.



Stackable Panel: with Super Base Foundation Element



Stackable Panel: with Monolithic Foundation Element



Stackable Panel: with Work-Height Power

Infeed Harness


The harness is used to transition building wiring to modular power within the furniture. One end is hardwired to building wiring and the modular end snaps into the power distribution assembly (PDA) in the furniture. This connection may be used to bring power in from the base or ceiling and can be used with open base panels.

Specification Tips


- For use with 24" – 60" (610mm – 1524mm) wide powered panels.
- For base applications, black split tubing may be field supplied to cover any exposed galvanized metal conduit.
- Not for use with glass, translucent, perforated, or open stack kits.
- Wire harness length is 180" (4572mm).

Power Location


- Floor
- Column
- Wall
- Ceiling



Infeed Harness

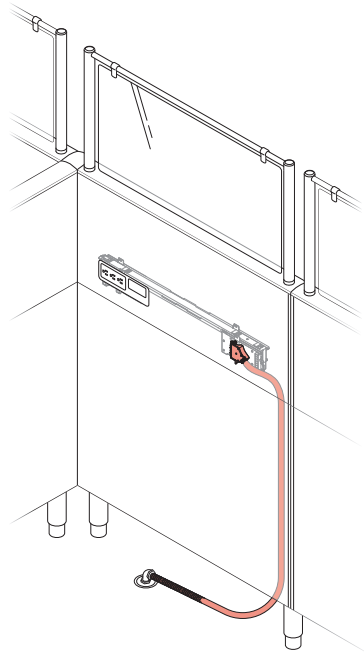

Open Base to Beltline

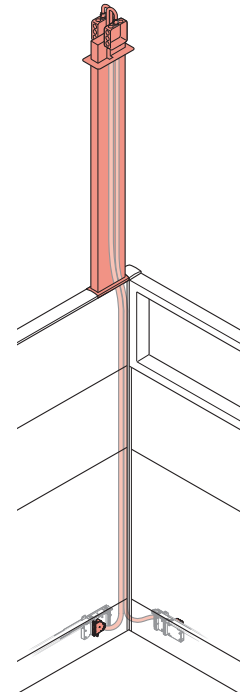

Two Harness Top Feed

Note

When connecting an infeed harness to a PDA at the beltline height the harness must be back fed through the vertical channel of the base panel before being connected to the building power.

Powered Panels


Base Power

Powered panels simplify planning power for a workstation. A powered panel includes a power distribution assembly (PDA) and a flex connector. The PDA is used to connect all other electrical components. The PDA has two connector ports at each end and two receptacle ports at each end. The connector ports on a PDA are used to span power to the next panel. The receptacle port is used for receptacles, base feeds, top feeds, and the vertical power connector.


Specification Tips

- For use with 24" – 60" (610mm – 1524mm) wide panels.
- Order extended power connector for 18" (457mm) wide panels.
- Order straight span connector for non-powered 3-Way or 4-Way conditions.
- Retrofit kits available to convert a non-powered panel to powered.
- Receptacle covers are included with powered raceway covers.


Powered Panel

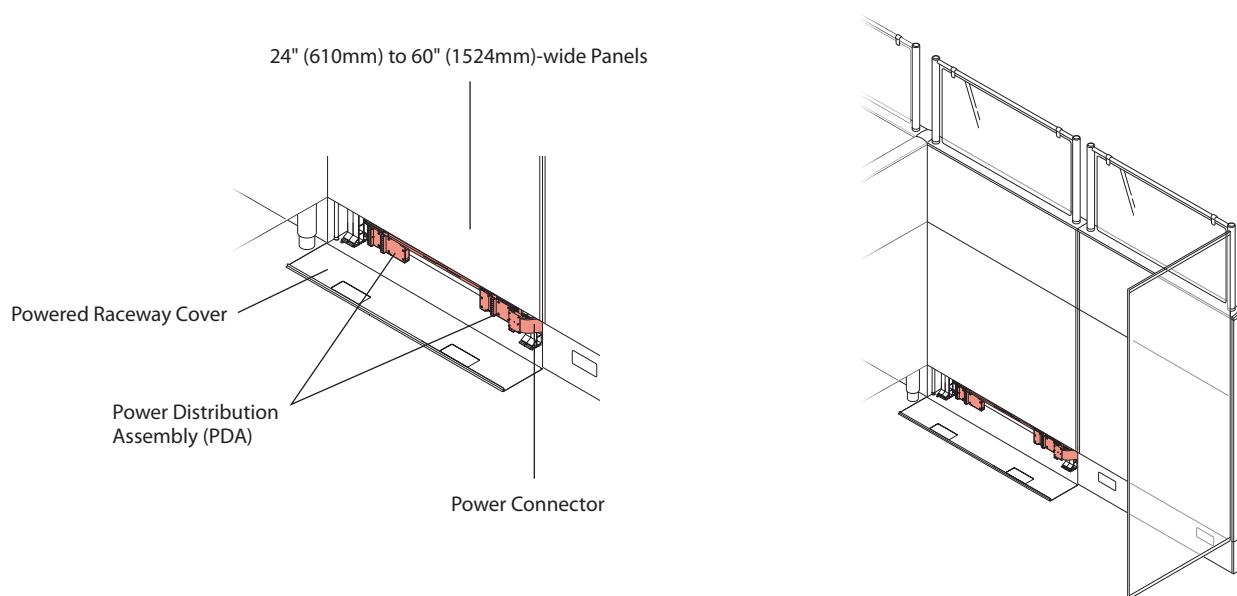


Power Distribution Assembly

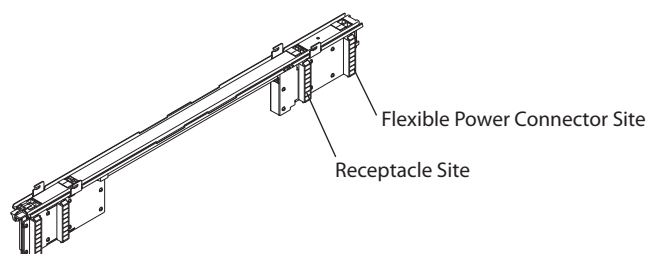

Flex Connector



Base Raceway Cover

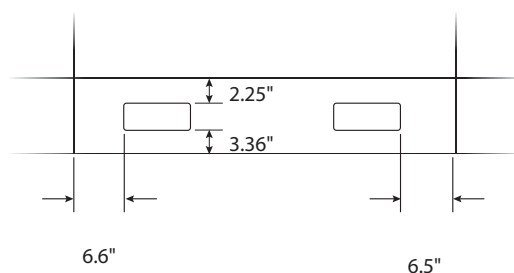

Note Refer to cable management section.


Power Kits

Work Height Power Kit

To place power in a work height location in PREMISE specify a powered stack kit and the desired pad types to finish the application. The stack kit provides a cross bar, cable trough, power distribution assembly (PDA) and flex connector. To access power with a receptacle in the PDA at work height specify a technology pad. If power is to pass through the location with no access required specify any non-technology pad.


Specification Tips

- For use with 24" – 60" (610mm – 1524mm) wide panels.
- No power pass-through for 18" (457mm) stack location. Power must be routed to the base to bypass an 18" (457mm) wide panel (see below).
- Order straight span connector for non-powered 3-Way or 4-Way conditions.
- Retrofit kits available to convert a non-powered stack to powered stack.




Powered Stack


18" (457mm) Panel/Pad



24" (610mm) Panel/Pad (No Power Access)



30" (762mm) Pad



36"-60" (914-1524mm) Pad




Installed Heights

Measure from the bottom of the work height port to the bottom of the raceway cover.

- Beltline height power 34" (864mm) high
- Standing height power 50" (1270 mm) high
- Below Worksurface height power 18" (457mm)



18" (457mm) Pass-Through

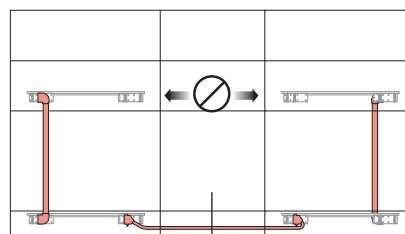

18" (457mm) Wide Panel


Power Kits

Structural Power Kit for Stack Application

Off-modular overheads must be supported by a structural cross bar and an off-modular pad. To place power in a work height location in PREMISE with an off-modular overhead specify a structural powered stack kit. The structural stack kit provides a structural cross bar, cable trough, Power Distribution Assembly (PDA) and flexible connector. To access power with a receptacle in the PDA at work height specify a slat technology pad. If power is to pass through the location with no access required, specify an off-modular pad.

Specification Tips

- For use with 24" – 60" (610mm – 1524mm) wide panels.
- No power pass-through for 18" (457mm) wide stack location.
- Order straight span connector for non-powered 3-Way or 4-Way conditions.
- Top feeds are not recommended for use on stack kits with structural crossbars.
- Retrofit kits available to convert a non-powered stack to powered stack.

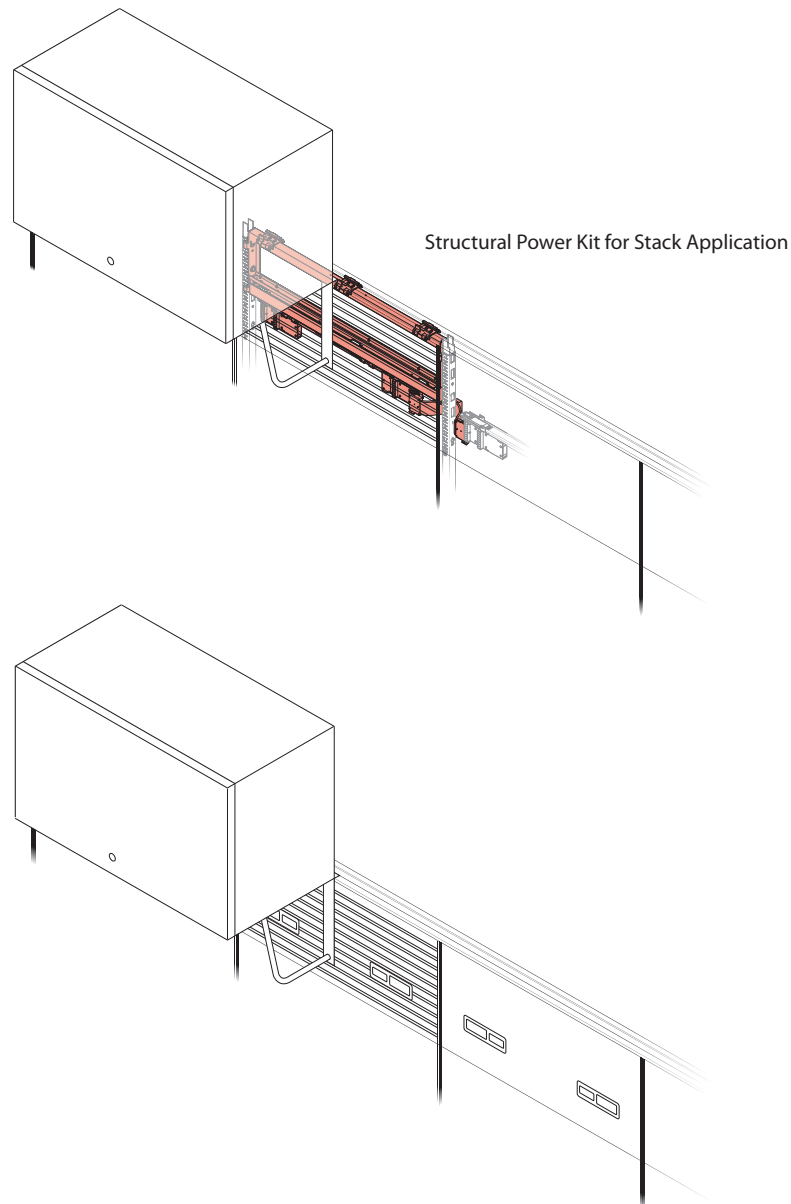



Power Connectors

Flexible Power Connector: Panel-to-Panel

The connector is used to span power from one powered panel to another adjacent powered panel. A power distribution assembly (PDA) and flexible connector are provided when a powered panel is ordered.

Specification Tips

- May be used in straight panel-to-panel, inside 90°, and inside 120° applications within the base raceway.
- Must be used with cable guides at stack levels for protection from hanging component.





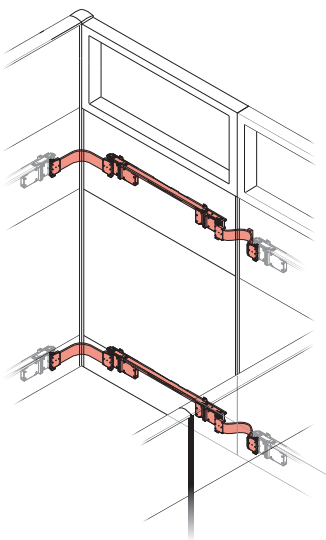



Straight Condition

Stack Kit Straight Condition





90° Condition

Stack Kit 90° Condition



120° Condition

Stack Kit 120° Condition





Power Connectors

Flexible Power Connector: Straight Span Raceway/Beltline



The connector is used to span power from one powered panel to another powered panel in an outside 90°, 3-Way, or 4-Way condition when return panels are non-powered. These connectors must be separately specified.

Specification Tips



- Must be used with cable guides at stack levels for protection from hanging components.
- May be used at base or work heights to span 3" space created by a 3-Way or 4-Way condition when return panels are non-powered.

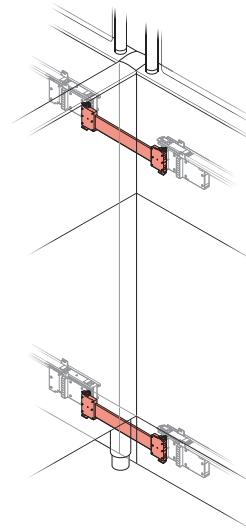



3- or 4-Way Condition





3- or 4-Way Condition



90° Condition



120° Condition





Power Connectors

Extended Power Connectors


The connector is used to route power through the base of one 18" (457mm) wide non-powered panel.

Specification Tips


- For use in base raceway only.
- Connectors cannot be coupled together.
- One length for all applications shown.




Straight Condition



120° Condition

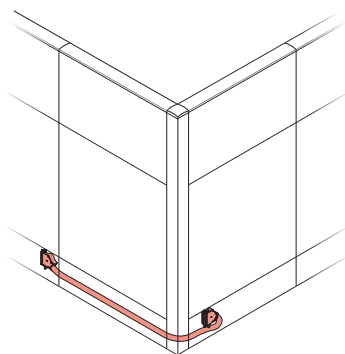

Corner Condition

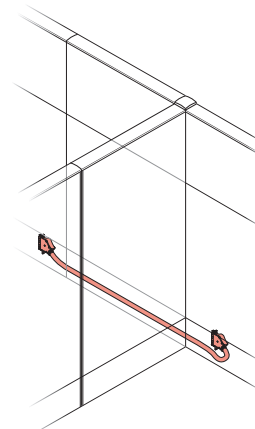

3-Way (shown) and 4-Way Condition


Power Connectors

Vertical Power Connector

These connectors route power vertically from the base to work height levels.


Specification Tips

- Cannot be used with monolithic panels, open, or glazed stack kits.
- Connectors block access to receptacle location at base and work height.

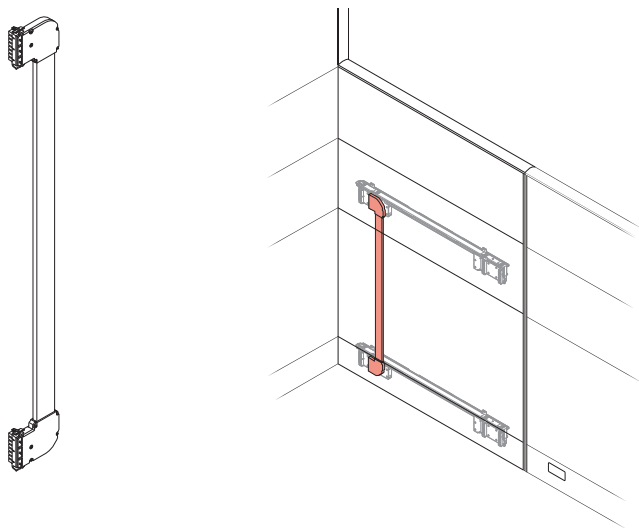

Beltline and Standing Height

- Installed height measures from the bottom of the work height port to bottom of raceway cover.

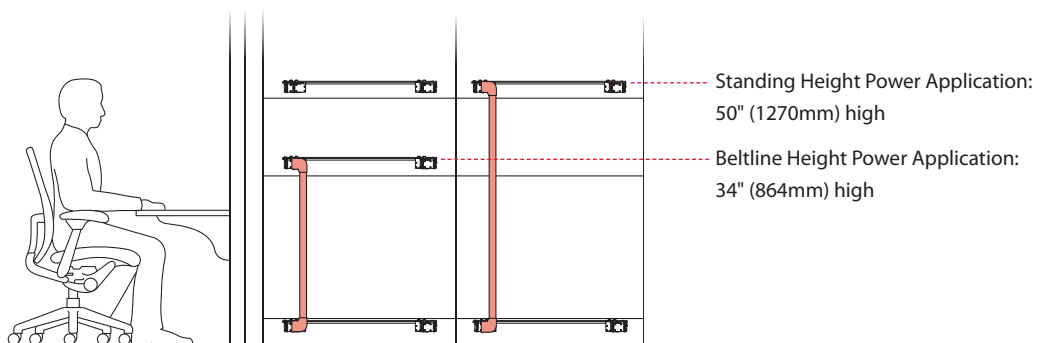


Receptacles

Receptacles


Receptacles attach to the power distribution assembly (PDA) to allow access to the circuits carried through a panel. The 3-Circuit 15 Amp receptacles have a circuit programmable feature that allows each receptacle to access either circuit 1, 2, or 3 in the field by simply sliding the connector to one of three positions.

Specification Tips

- 15 Amp receptacle configuration is NEMA 5-15R.
- 20 Amp receptacle configuration is NEMA 5-20R.
- 3-Circuit 20 Amp and 4-Circuit receptacles have fixed circuit access and are not field programmable.
Specify appropriate number of receptacles for each circuit.
- Specify common ground or isolated ground.




15 Amp




20 Amp

POWER CONFIGURATION	RECEPTACLE IDENTIFIER			
2+2	1	2	3	4
3+1	A	B	C	D
3-Circuit (20 amp)	I	II	III	NA



3-Circuit 15 Amp
Programmable
Receptacle




- 3-Circuit 20 Amp
- 4-Circuit 15 Amp
- 4-Circuit 20 Amp

Power/Communication Port Kit

Port kits provide a triplex receptacle and modular furniture telecommunications outlet at below worksurface and beltline level in monolithic panels.

Specification Tips

- Specification of circuit one, two, three, or four and ground type is required.
- Requires field modification of a powered panel.
- Modular furniture telecommunications faceplate must be field supplied.

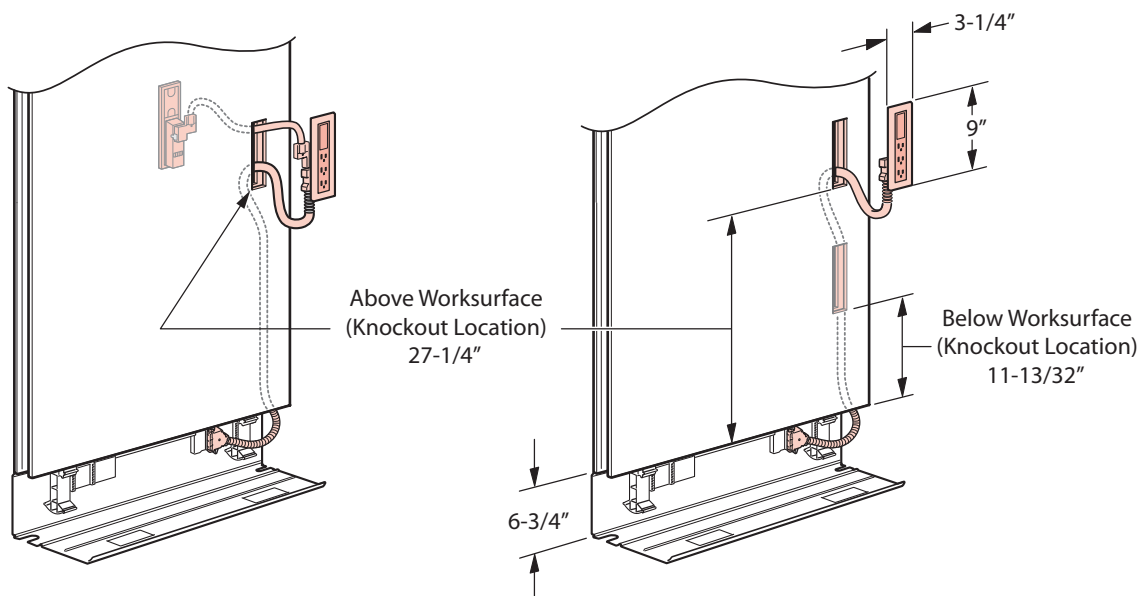


Receptacles

Desktop Port

Desktop ports provide three 15 Amp outlets and a modular furniture telecommunications outlet opening in a housing that can be clamped to the edge of a worksurface.

Specification Tips

- Power cord plugs into a panel or building receptacle outlet.
- Desktop ports cannot be linked (daisy chained) together.
- Cord use should be reviewed by local authorities (electrical inspector) prior to ordering.
- Modular furniture telecommunications faceplate must be field supplied.

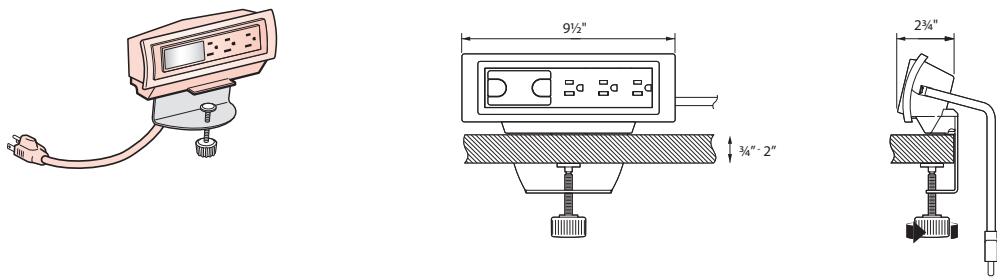


Flip Top Unit

Flip Top Unit provides 15 Amp outlets and data jacks in a desk top housing that flips up for access or can be closed for unobstructed work space.

Specification Tips

- Flip Top Unit must be field installed on worksurfaces by field cutting a hole.
- Hardwired applications should be reviewed by local authorities (electrical inspector) prior to ordering.
- Corded Flip Top Units with four receptacles utilize a fused plug that may block adjacent building receptacle outlet.

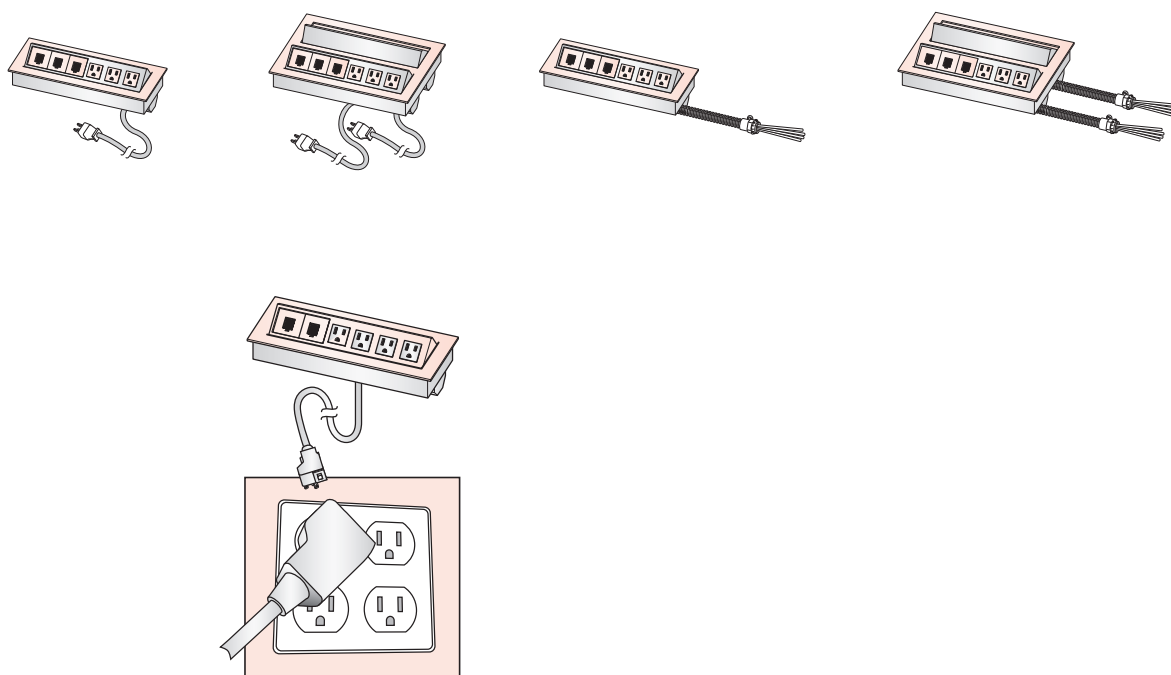

Fused Plug Detail
(for Flip Top Units with four or more outlets)

Electrical and Wire Management



Enhanced Power Module

An Enhanced Power Module provides additional electrical functionality to a PREMISE workstation. It provides three 15A outlets and a modular furniture telecommunications outlet opening in a housing that can be clamped to a worksurface in the following locations:


- Above a Worksurface
- Above a Worksurface with Tackboard
- Below a Worksurface
- To Storage Unit

Above a Worksurface


- Enhanced Power Module may be attached to a worksurface with a depth between 1 1/8" (29mm) – 2" (51mm).




Above a Worksurface in Conjunction with Tackboard



Below a Worksurface

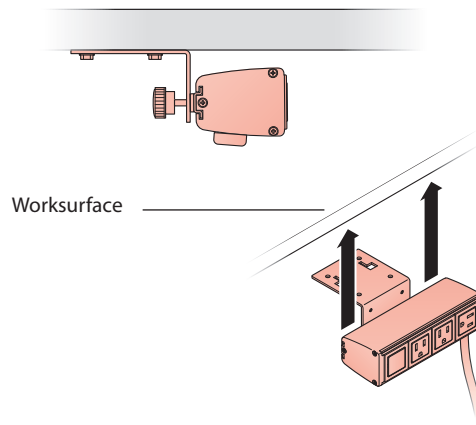

To Storage Unit


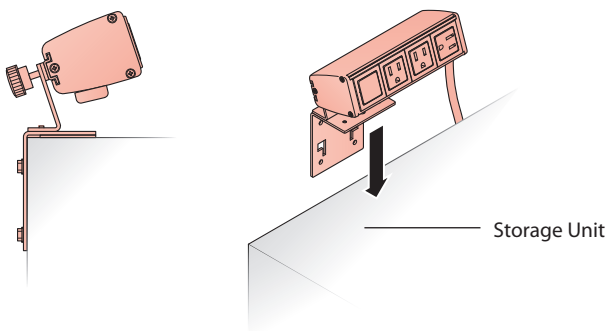


- Power cord plugs into a building receptacle outlet.
- Hardwired applications should be reviewed by local authorities (electrical inspector) prior to ordering.
- Enhanced Power Modules cannot be linked (daisy chained) together.
- Cord use should be reviewed by local authorities (electrical inspector) prior to ordering.


Flip Top Unit: Details

Flip Top Unit: Side Elevation

- Flip Top Unit: bezel and pop-up portion are proud to worksurface.
- When installed into a $1\frac{3}{16}$ " worksurface, the Flip Top Unit will extend below the worksurface.

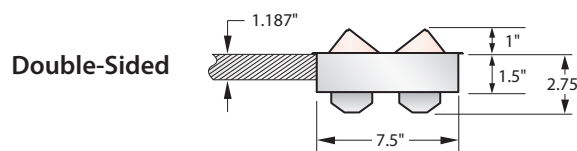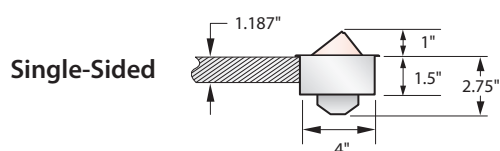


Flip Top Unit Bezel Dimensions:

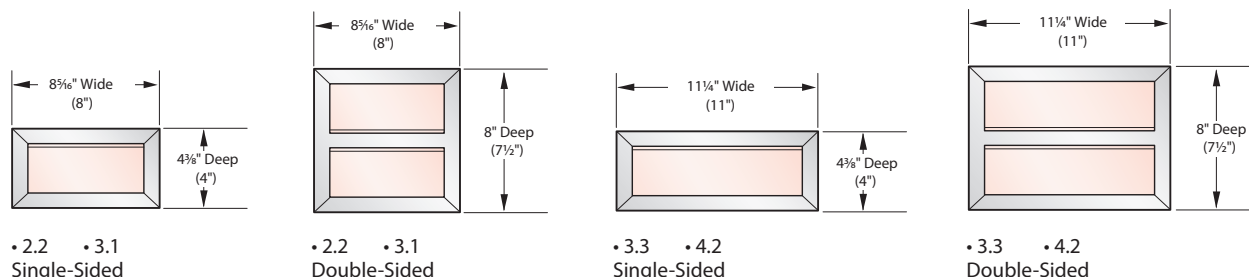


Note Cutout dimensions are in parentheses ().

The Flip Top Unit includes multiple data jack adapters to accommodate most field supplied data jacks. Also included are blank data covers to be used if no data access is needed. Data jacks are field supplied.


- 15 Amp rated simplex power receptacles
- Data information access ports




Data jack adapters standard in white; included with Flip Top Unit. (See manufacturer list for field supplied data jacks).



Perimeter edge of power receptacles and data ports faceplate standard in white.



Simplex power receptacles standard in white; included with Flip Top Unit.

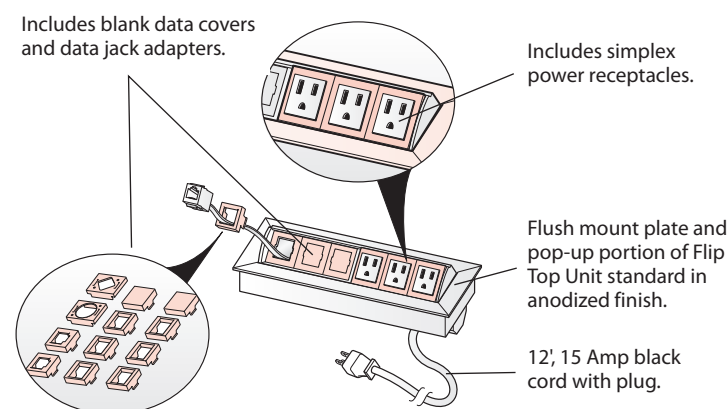

Data Jack Adapters Included

Manufacturer's List of Field Supplied Data Jacks

Systemax/CommScope
Tyco SL and 110 Connect Series Modular Jacks
Siemon Keystone Style
Allen Tel Versa Tap Series
Leviton Quick Port® Series
Nordx Keystone Style
Tyco SL Coupler Series
ADC (Krone) 6000 Series
Hubbell Xcelerator™ Keystone Series
Blank (no coupler/jack)
Ortonics TracJack Series
Panduit Mini-Com Series
Microphone Jack/3-Pin XLR (solder type only)
Video Monitor Jack/DB-15 (panel mount solder style)

Power Basics

3-Circuit

- As many as three separate 20-Amp rated circuits from one power feed module.
- 8-Wire system enclosed in one power distribution assembly:
 - 3 hot wires
 - 3 neutral wires
 - 1 common ground wire
 - 1 isolated ground wire
- Separate neutrals, one dedicated to each circuit, are capable of carrying computer-quality power.

4-Circuit

- As many as four 20-Amp rated circuits from one power feed module.
- 8-Wire system enclosed in one power distribution assembly:
 - 4 hot wires
 - 2 neutral wires
 - 1 common ground wire
 - 1 isolated ground wire
- 4-Circuit product is available in either a 2+2 configuration or a 3+1 configuration. Both configurations utilize a shared neutral conductor for at least two circuits. All circuits have access to either common or isolated ground.




Hardwire

- Components available to meet Chicago and other similar hardwire configurations.
- Consists of infeeds, junction boxes, and mounting hardware.
- Field supplied wire and receptacles allow for a variety of applications for specific needs.

Panel Power Options:

- 3-Circuit and 4-Circuit: Panel options specified with 3- or 4-Circuit power include a power distribution assembly and a flex connector.
- New York City (NYC): The New York City option includes the same components as those listed above but are shipped separate from the panel and require field installation.
- New York Port Authority (NYPA): The New York Port Authority option includes a metal raceway cover and is available with or without the power components.
- Hardwire: The hardwire option includes raceway covers for receptacle access. Hardwire electrical raceway kits and receptacle covers must be separately specified. In addition, receptacles, conduit, wiring, and other associated components must be field supplied.

3- and 4-Circuit Overview



3-Circuit/Separate Neutrals

This option provides three circuits, each with its own neutral.

- Aligns with the 3 phase national power grid and most North American buildings.
- Is compatible with the following building power configurations:
 - 3 phase (208Y/120V)
 - Three wire single phase (120/240V)
 - Single phase (120V)
- Offers the most adaptability to special power needs such as:
 - multiple power sources
 - facility energy control
 - isolation of high harmonic loading
- Features receptacles with patented on-site circuit access programmability (available only on Power Base for furniture).
- Offers receptacles in common ground or isolated ground configurations.

4-Circuit/2+2

This option provides four circuits, two circuits share neutral #1, two circuits share neutral #2.

- Provides more circuits (4 vs. 3) for each homerun from the electrical closet, which can reduce the installed cost per circuit.
- Is compatible with the following building power configurations:
 - 3 phase (208Y/120V)
 - Three wire single phase (120/240V)
- Is sometimes less adaptable to special power needs such as multiple power source or facility energy control.
 - Special power needs are typically planned in sets of two circuits
 - In some cases, 10 gauge shared neutral may not fully isolate circuits
- Modular receptacles have fixed circuit access.
- Offers receptacles in common ground or isolated ground configurations.

4-Circuit/3+1

This option provides four circuits, three circuits share neutral #1, circuit #4 has a separate neutral.

- Provides more circuits (4 vs. 3) for each homerun from the electrical closet, which can reduce the installed cost per circuit.
- Is compatible with the following building power configurations:
 - 3 phase (208Y/120V)
- Is sometimes less adaptable to special power needs such as multiple power source or facility energy control.
 - Special power needs are typically planned only using circuit #4
 - In some cases, 10 gauge shared neutral may not fully isolate circuits
- Modular receptacles have fixed circuit access.
- Offers receptacles in common ground or isolated ground configurations.

Power Planning General Guidelines and Checklist

All power application information is found in the corresponding component Price List, system-specific specification guide, and Power Base Planning Guide.

Verify the Following:

In: Routing power from the building into the furniture.

- ☐ Power feed length will reach building location.
- ☐ Infeed fits panel width.
- ☐ Infeed location is not occupied by a:
 - Receptacle
 - Horizontal Connector (attaches to receptacle location on PDA)
 - Vertical Connector
 - Port Kit Connector (attaches to receptacle location on PDA)
- ☐ Power raceway cover for external infeed location.

Through: Routing power through the furniture.

- ☐ Power distribution assemblies (PDAs) are located where power access is needed.
 - Base power is specified with the base panel.
 - Beltline and standing height power are specified with power kit or structural power kit for stack application.
- ☐ **Horizontal Power Routing:**
 - ☐ Base Power
 - Spanning connector for each 3-Way/4-Way connection where return panels are non-powered.
 - Extended power connector for each 18" (457mm) panel.
 - All adjacent panels have base power, 18" (457mm) power connectors cannot be coupled together.
 - ☐ Work Height Power
 - Spanning connector for each 3-Way/4-Way connection where return panels are non-powered.
 - Work height power is only routed through panels 24" (610mm) wide or greater.
- ☐ **Vertical Power Routing**
 - Correct Vertical Power Connector length is specified for work height application.
 - Vertical power connector passes through a Super Base panel.

Out: Getting power out of the furniture so it can be used.

- ☐ • Maximum receptacle quantity per infeed is not exceeded (13 United States/10 Canada).
- ☐ • Fixed circuit receptacles are specified for 20 amp and 4-circuit product.
- ☐ • Ability to access power through base raceway receptacle port or technology pad.
- ☐ • Power/communication port kit is used in a powered monolithic panel.

General Power Application Guidelines:

- Power break markers are indicated where needed.
- Other accessories do not block receptacles access.
- Panel hung components and floor-supported storage do not block receptacle access.
- Do not mix 3-Circuit or 6-Circuit with 4-Circuit components.
- Do not mix 2+2 and 3+1 components.
- Components have unique polarity key and color coding (3-Circuit = black, 6-Circuit = ivory, 2+2 = blue, and 3+1 = green).


Power Distribution for Hardwire Applications

Hardwire power applications are designed to address non-modular power planning solutions.

- 1. Power distribution from building-to-panel.
- 2. Vertical power distribution.
- 3. Horizontal power distribution.

Infeeds	Applications
1 Base Feed	48" (1219mm) or as required
2 Top Feed	Ceiling Height (H) + 18" (457mm)

Panel Applications	Panel Applications
3 Between two junction boxes on one panel	Panel Width (W) – 23" (584mm)
4 Passing through a panel	Panel Width (W) + 12.50" (318mm)
5 Across 3- or 4-Way connection (to adjacent boxes)	16.50" (419mm)
6 Base to work-height	44" (1118mm)
7 Work-Height/work-height	88" (2235mm)
8 Base to standing-height	60" (1524mm)

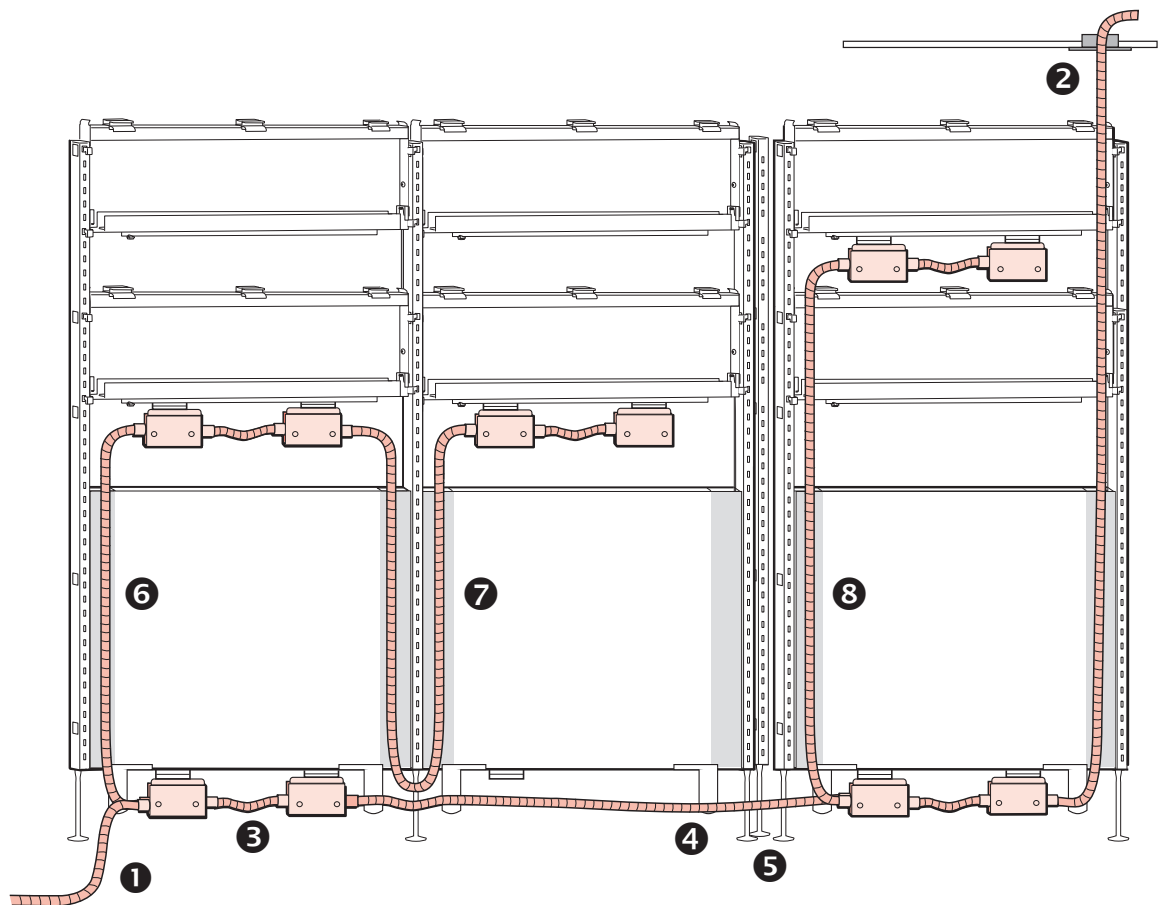

Tip Conduit , wiring, and receptacle are field supplied.


International Power Management

International Power Planning

For power applications outside North America, we recommend the use of Power Logic soft wiring components. Power Logic offers a system of single circuit power cords and receptacle modules that fit into our non-powered Base Raceway. Receptacle Modules are offered with two sockets (three and four socket versions also available). Each Receptacle Module has sockets, switches, and fuses that are appropriate for each country around the world.

- Use a Power Entry Cord to bring power into the Panel's Base Raceway and feed a Receptacle Module mounted to the Base Raceway Cover.
- Use additional Cords to route power to additional receptacles as needed.
- Use a Splitter to branch out in multiple directions (up to four).

Contact the Power Logic regional sales office in your area to help with planning details to assure local electrical code compliance. Contact Power Logic through their website, www.powerlogic.net, or through their corporate offices in Cape Town, South Africa at 27-21-704-1450. Power Logic also offers power solutions for desk top, conference table, or freestanding power applications.

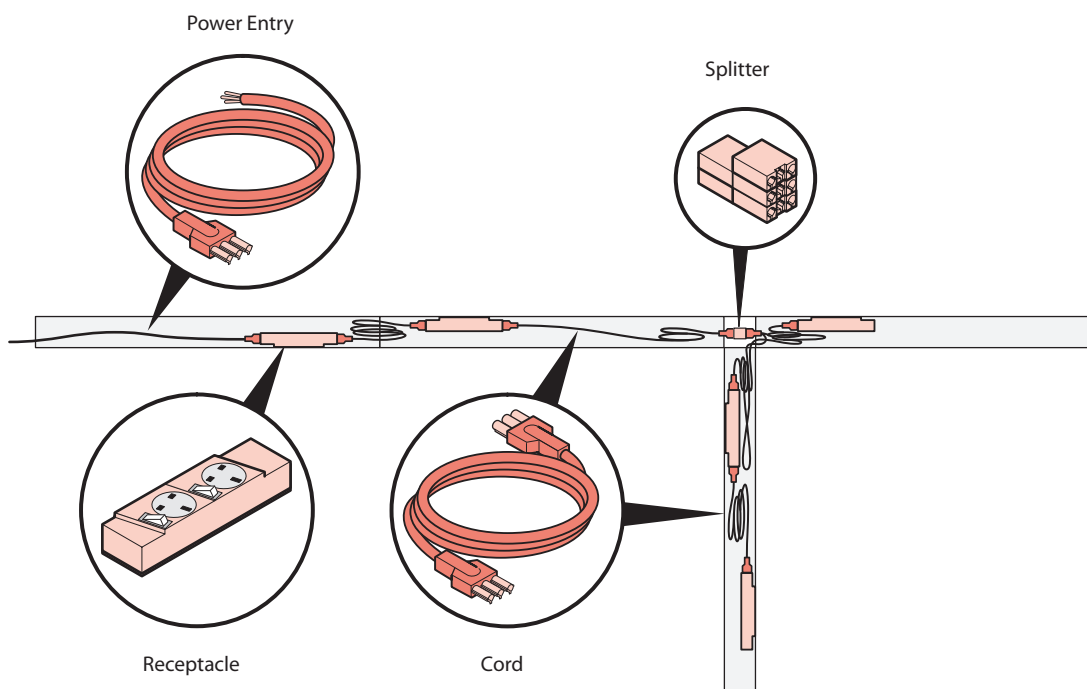

Cable Management: Introduction


PREMISE addresses the distribution of communications cables with panel-integrated cable pathways and access points.

Cables can be routed through these pathways:

- Panel Base Pathway
- Monolithic Panel Top Pathway
- Monolithic Panel Vertical Pathway (one on each side)
- Stack Kit Cable Trough
- Space between Super Base Panel and Pads: ½" (13mm) each side
- Space between Stack Kit Pads and Connectors
- Top Feed Vertical Raceway

Cables can be accessed at these locations:

- Base Raceway Covers with Communication Ports must be separately specified.
- Stack Kit Communication Ports
- Monolithic Panel Communications Port Kit
- Desktop Port/Flip Top Unit Communication Port
- Enhanced Power Module

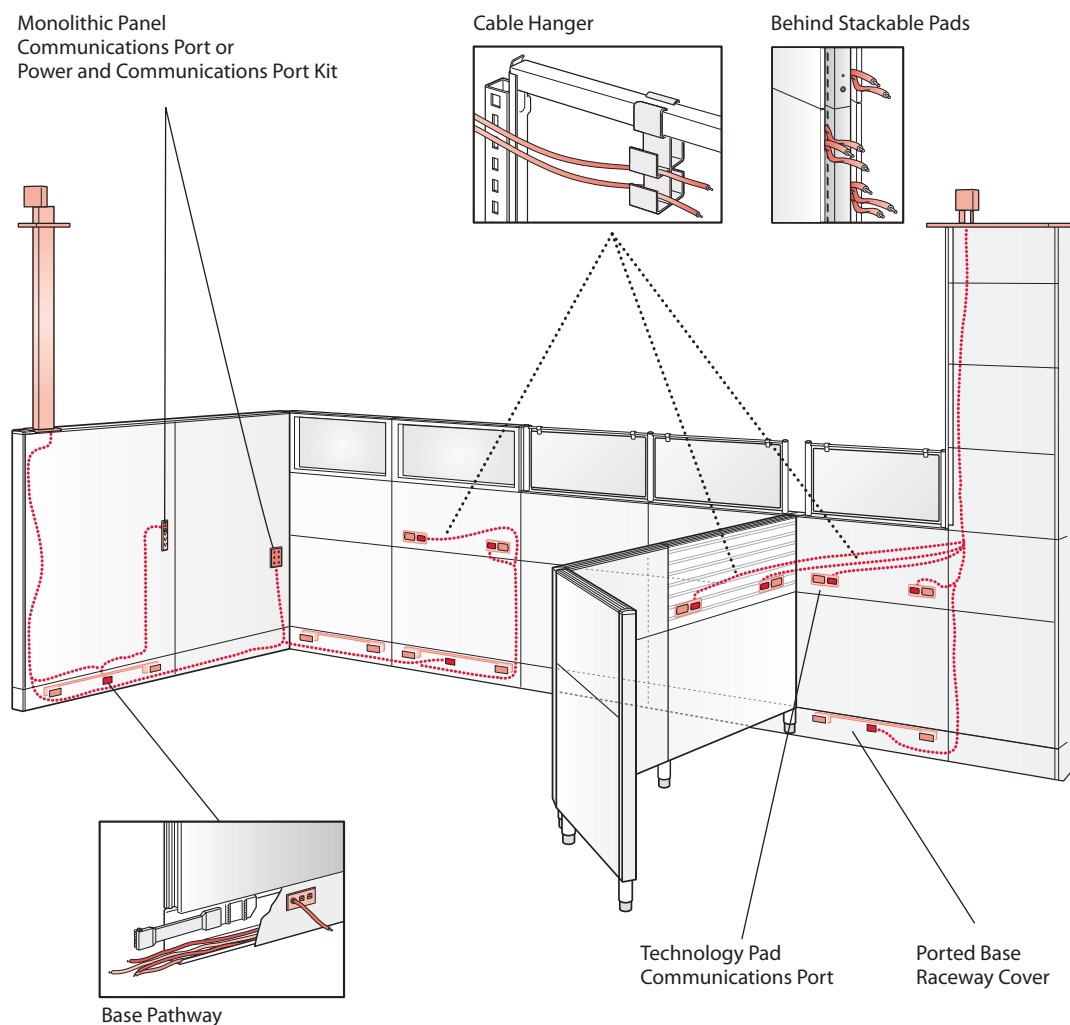


Tip 30" Pad has only one access location on left-hand side of pad.

Note Route cables at base pathway or at stack location when using Grooved Top Cap.


Base Raceway: Communication Options and Dimensions

Raceway with Modular Furniture Telecommunications Outlet

PANEL WIDTH	"A" MEASUREMENT
30" (762mm)	13.65" (347mm)
36" (914mm)	13.47" (342mm)
42" (1067mm)	16.47" (418mm)
48" (1219mm)	19.47" (494mm)
60" (1524mm)	25.47" (647mm)

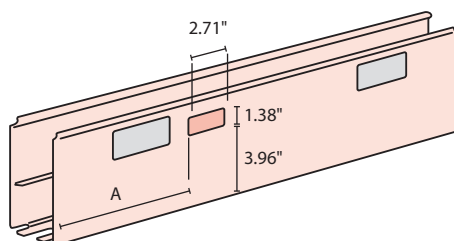


Single-Sided Base Raceway

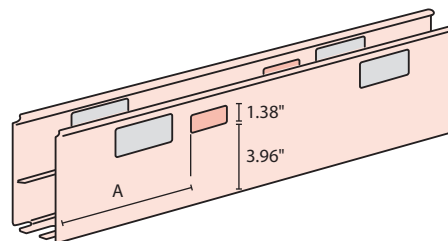


Double-Sided Base Raceway

Raceway with Single-Gang Communication Access Opening

PANEL WIDTH	"A" MEASUREMENT
30" (762mm)	13.1" (333mm)
36" (914mm)	14.5" (368mm)
42" (1067mm)	17.5" (444mm)
48" (1219mm)	20.5" (521mm)
60" (1524mm)	26.5" (673mm)

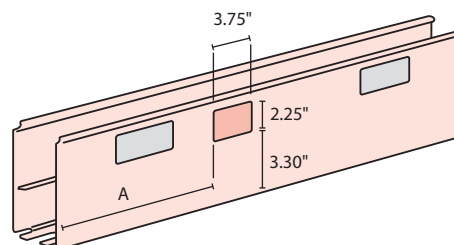

Single-Sided Base Raceway

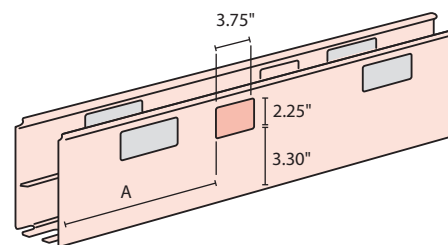



Double-Sided Base Raceway

The following manufacturers offer faceplates that fit modular furniture telecommunications openings. For additional details, contact your local Haworth Technical Representative.

Systimax/CommScope
 Tyco
 Siemon
 Leviton
 ADC
 Hubbell
 Belden
 Ortonics
 Panduit
 Hubbell

Data Access: Data Brackets

- Up to four sites per work-height application (two per side).
- For use with modular furniture telecommunications plate.
- Data brackets must be installed at all work-height applications.
- Data blank plates are required when modular furniture telecommunications faceplates are not used: Single Technology Pad ships with enough blank plates to fill pad openings.

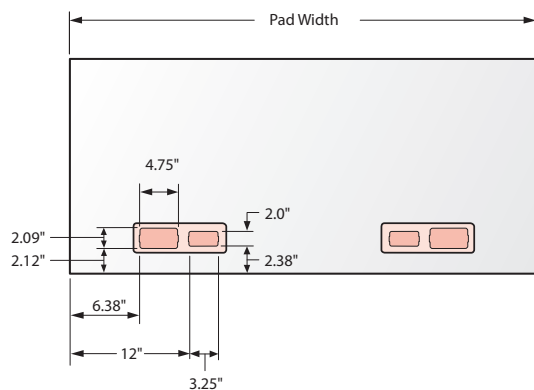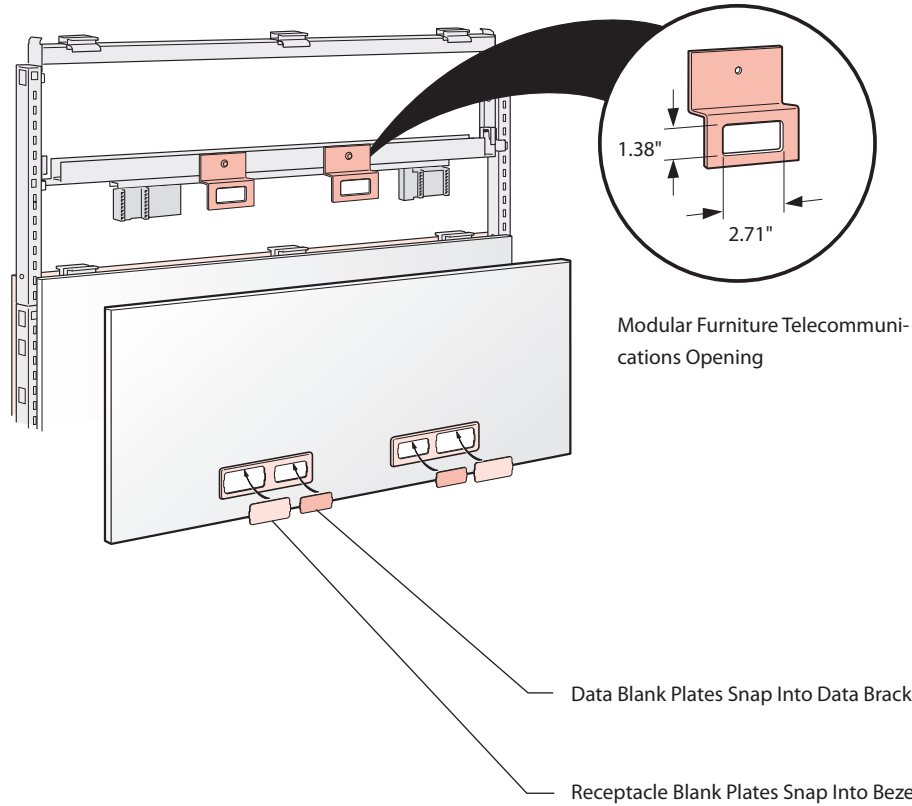

Technology Pad Access Dimensions

PAD WIDTH	WIDTH	POWER ACCESS (A)	DATA ACCESS (B)
30" (762mm)*	29.69" (754mm)	1	1
36" (914mm)	35.69" (906mm)	2	2
42" (1067mm)	41.69" (1058mm)	2	2
48" (1219mm)	47.69" (1211mm)	2	2
60" (1524mm)	59.69" (15168mm)	2	2

*Available as left side access only.

Tip 30" Pad has only one access location on left-hand side of pad.


Note Powered 10" stack pad limits cable routing.

Cable Management

Cable Accessories

Power kits are provided with communications accessories to manage the direction of the cables within the panel configuration. Additional accessories may be ordered as needed. Accessories include:

- Cable Trough (NEC4)
- Cable Hanger (NECH - 1)
- Vertical Cable Guide (NECG - V)
- Cable Reel (NECR - 1)
- Straight Cable Guide (NECG - S)
- Corner Cable Guide (NECG - C)

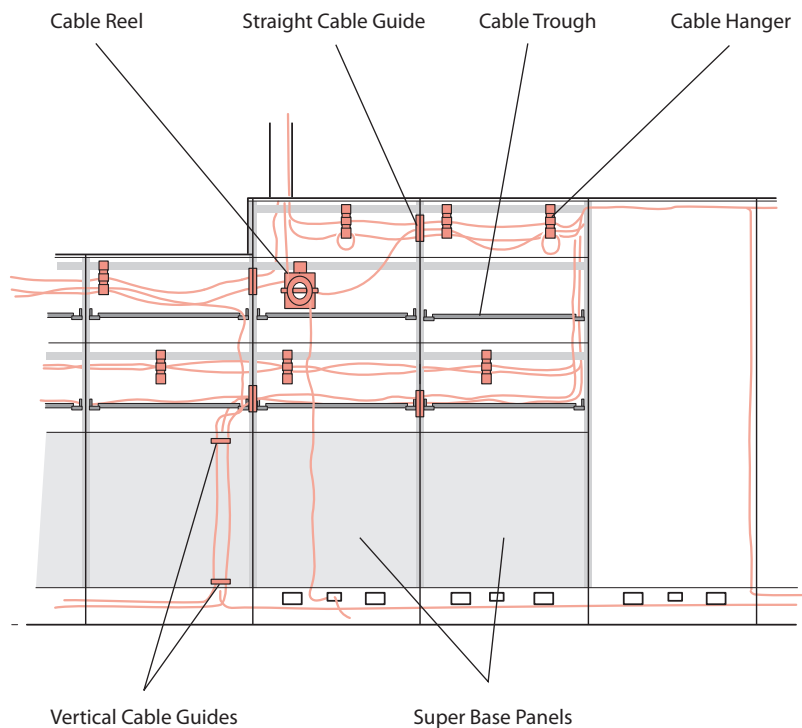

Tip Modular furniture telecommunications outlet and single gang data port openings are available offset left from the center raceway cover when specified.

Cable and power management accessories are provided only with power kits as shown below. Order additional accessories as needed.


STACK APPLICATION ACCESS TYPE	POWER CABLE	MANAGEMENT ACCESSORIES
Power and Communication	3-Circuit	2 Cable Hanger, 3-5" (76–127mm) straight cable guide, 1-5" (25–127mm) corner cable guide, 1-3" (25–76mm) straight cable guide, 1-3" (25–76mm) corner cable guide
Power and Communication	4-Circuit	2 Cable Hanger, 3-5" (76–127mm) straight cable guide, 1-5" (25–127mm) corner cable guide, 1-3" (25–76mm) straight cable guide, 1-3" (25–76mm) corner cable guide

- Notes**
- Components hung at stack heights may interfere with cable routing and cable guides. Components prevent the use of cable guides if used at same level.
 - For external routing of cables use NEV-1 and NEV-2.





Cable Management

Cable Bend Radius

When planning the routing of communications cables through PREMISE panels, the bend radius at the panel-to-panel connections and within the panel pathways should be taken into consideration.

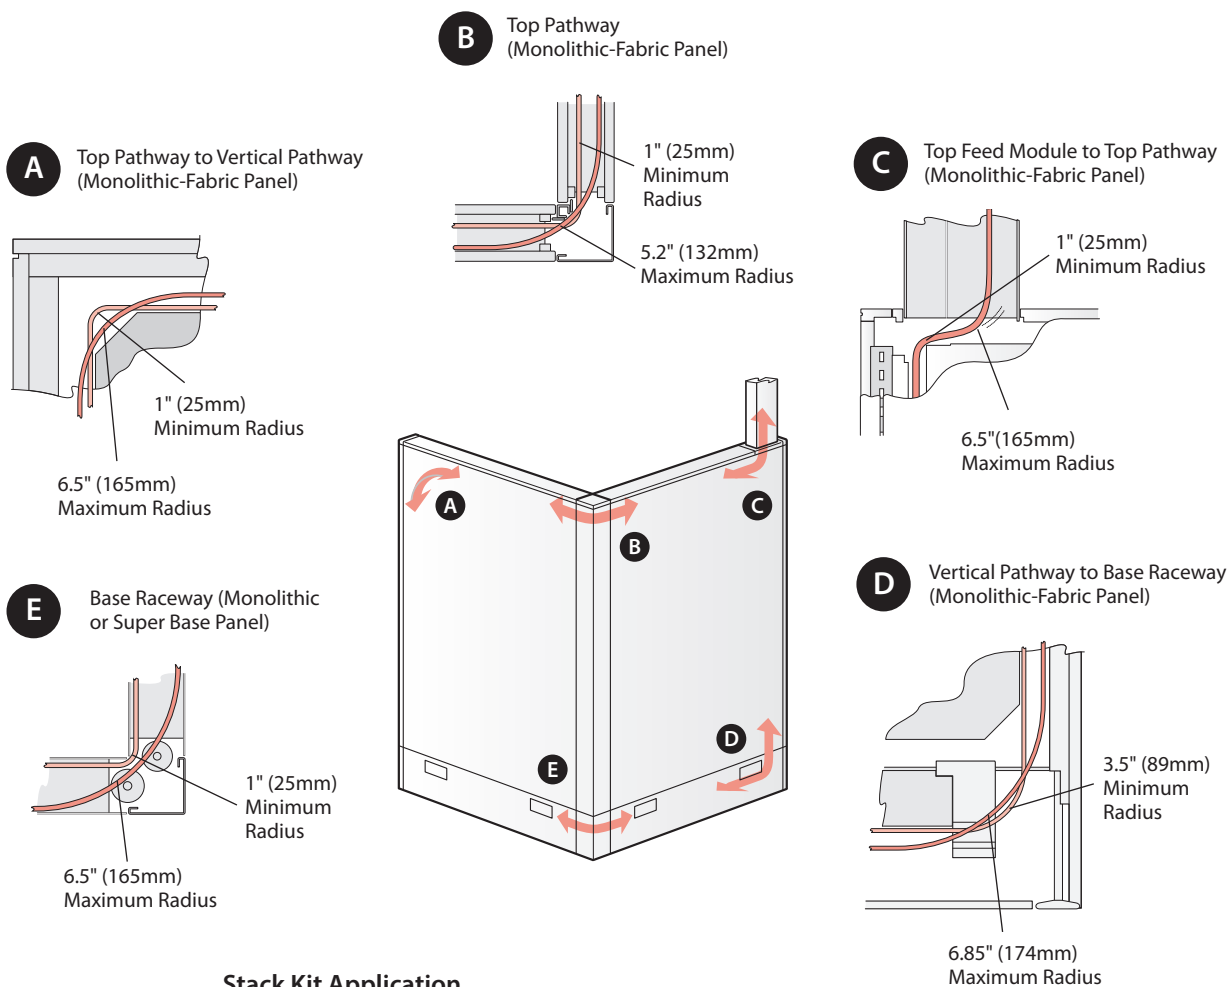

Stack Kit Application

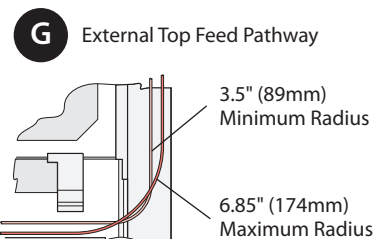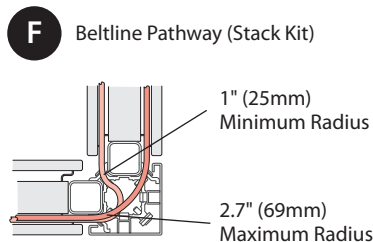

Note Route cables at base raceway or at stack location when using Grooved Top Cap.

Cable Management

Cable Capacities

This chart shows the number of communication cables that can be routed through specific pathways. Cable capacities are based on 0.20" (5mm), 0.25" (6mm), and 0.30" (8mm) diameter cables at 60% and 40% fill capacity. TIA/EIA 569 suggests a cable fill of 40% for planning and up to 60% for unplanned or future additions. The TIA category designations for cable are not size specific but typically the higher the category number the larger the diameter the cable is. As a general rule a Category 5e (Enhanced) cable is approximately 0.20" in diameter, the Category 6 0.25", and a Category 6A (Augmented) 0.30". The actual diameter will vary depending on manufacturer and whether it is a plenum rated cable or riser (PVC) cable.

PREMISE Pathway Capacities	Cable Pathway Area		Cable Capacity					
			60% FILL			40% FILL		
	SQ. IN.	SQ. MM.	0.20" (5MM)	0.25" (6MM)	0.30" (8MM)	0.20" (5MM)	0.25" (6MM)	0.30" (8MM)
Example								
One Square Inch Pathway	1.0	645	19	12	8	13	8	6
Monolithic Panel Pathways								
Base Pathway, Powered	6.0	3871	115	73	51	76	49	34
Base Pathway, Non-Powered ¹	6.0	3871	115	73	51	76	49	34
Monolithic Vertical Pathway at Panel Lock ²	1.7	1097	32	21	14	22	14	10
One Vertical Pathway (2 per panel)	2.8	1806	54	34	24	36	23	16
Top Pathway (within panel)	2.5	1613	48	31	21	32	20	14
Top Pathway (with light block restriction) ³	1.6	1032	31	20	14	20	13	9
Super Base Panel Pathways								
Base Pathway, Powered	6.0	3871	115	73	51	76	49	34
Base Pathway, Non-Powered ¹	6.0	3871	115	73	51	76	49	34
One Vertical Pathway (2 per panel)	1.3	839	25	16	11	17	11	7
Stack Kit Cable Trough (1.5" x 1.4" nominal)	2.1	1355	40	26	18	27	17	12
Stack Vertical 90° Corner Trim (1.8" x 1.8")	3.2	2065	61	39	27	41	26	18
Top Feed Modules								
Top Feed Module 3- and 4-Circuit (Stack) ⁴	7.2	4645	138	88	61	92	59	41
External Top Feed Module 3- and 4-Circuit	4.5	2903	86	55	38	57	37	25
Stack Kit Cable Guides								
Vertical Cable Guide NECG-V (2½" x 5/16")	0.7	452	13	9	6	9	6	4
Straight NECG-3-S (3" x 3/8" nominal)	1.1	710	21	13	9	14	9	6
Straight NECG-5-S (5" x 3/8" nominal)	1.8	1161	34	22	15	23	15	10
Inside Corner NECG-3-C (.95 bend radius)	Same cross-section as NECG-3-S, but tight bend radius.							
Inside Corner NECG-5-C (.95 bend radius)	Same cross-section as NECG-3-S, but tight bend radius.							
Cable Hanger NECH-1 (4-cavity 1.1" x 1.1" ea.)	4.8	3097	92	59	41	61	39	27
Worksurface Wire Manager H-loop NEH-8	3.4	2194	65	42	29	43	28	19
Vertical Wire Manager NEV-1	0.3	194	6	4	3	4	2	2
Vertical Wire Manager NEV-2	Intended for a single task light cord							

¹ Non-powered provides no additional cable capacity than powered.

² On Monolithic Panels the honeycomb can be crushed to allow cable to route around the panel lock.

³ The light block at the panel intersection can be cut or modified to match the top pathway fill capacity.

⁴ Top Feed cable capacity on Monolithic panels is greater than the panel capacity. For Monolithic panels cable capacity will be equal to one Vertical Pathway and one Top Pathway (provides access to second Vertical Pathway). For Super Base Panels and Stack Kits, the area for routing cables is limited to 0.4" (10mm) area between the pads and cross-bars or top of panel. The numbers provided in the chart reflect this restriction.

Notes

- Route cables at base raceway or at stack location when using Grooved Top Cap.
- Mock-up of cables is more accurate than these mathematical calculations due to rounding error.

This page intentionally left blank.



Technical Specifications



Technical Specifications

Performance Ratings

- All panel types and panel mounted components meet or exceed the test requirements in ANSI/BIFMA X5.6- Panel System Tests for Office Furnishings.
- All panel types and electrical components are UL-1286 Standard for Safety for Office Furnishings listed and CUL (UL mark for Canada) certified.
- Fabric panels and steel surfaced panels have a Class A fire rating based on testing assembled panels to ASTM E84 Surface Burning Characteristics for Building Materials or equivalent standard (UL-723).

Panel Assemblies

All panels are shipped complete with top caps and panel locks. All panels with in-line, end-of-run and two-, three-, and four-way 90 degree conditions, accept separately specified stackable elements that can be added up to 120" (3048mm) in overall panel height. All panels, door frames and stackable elements have an overall thickness of 3" (76.2mm). All panels specified as powered include a pre-wired electrical distribution system and flexible power connector. Powered panels feature an electrical distribution system that has eight-wires and can be specified with one, 3-circuit and two, 4-circuit wiring configurations. Each circuit is rated for 20-amps at 125 volts. They can be specified as factory installed in the base pathway and include a raceway cover with four receptacle cutouts. Panels specified as non-powered, closed base, include a base raceway cover that has no receptacle cutouts. Panels are easily converted in the field from powered to non-powered by removing the electrical distribution system. Panels can also be specified with an open base. The standard top cap is made of 21-gauge (.033", .91mm) roll-formed steel with a powder coat finish. The wood top cap is made of 21-gauge (.033", .91mm) roll-formed steel and wrapped with wood veneer. The grooved top cap is made from extruded aluminum with a powder coat finish and has three grooves that allow attachment of privacy screens, overheads, or panel connectors in off-modular applications. The base raceway cover is made of .050" (1.3mm) thick rigid plastic.

Fabric Surface Monolithic Panel

The panel consists of four roll-formed, U-shaped, galvanized, 21 gauge (.033", .84mm) cold-rolled steel rails joined together as a frame with spot-welds at each corner. This frame surrounds an expanded, multi-cell honeycomb core made of Kraft paper. Mineral board sheets are bonded to each side of the honeycomb and steel frame. A 1/4" (6.4mm) thick fiber-pad is held in place on both faces of the panel by a fabric covering that is held in place by a pressure-fit retention spline that engages into a roll-formed detail of the steel frame. The vertical panel frame rails include stamped openings that house a die-cast integral lock for engaging and locking panel connectors. The fabric surfaces can be removed and replaced in the field on an uninstalled panel. A removable top cap conceals a frame-integrated, 2" (50.8mm) deep pathway for routing communications cables. The base raceway cover of the panel conceals a 6.75" (171mm) high pathway. Frame-integrated vertical pathways run along both sides of the panel, connecting the top pathway and base pathway. Panel can be field ported for power and communication access on the panel face with a separately specified kit.

Glazed Monolithic Panel

The panel frame is constructed of four extruded aluminum rails, machined and connected by threaded fasteners. The vertical frame rails include machined openings that house a die-cast integral lock for engaging and locking panel connectors. Each face of the panel has removable glazing consisting of an extruded aluminum frame, which surrounds a 1/8" (3.2mm) thick pane of clear tempered safety glass. The frame attaches to the panel with threaded fasteners at the top of the panel. The glass frame has gaskets that ensure a tight fit and minimizes glass contamination. A removable top cap conceals a frame-integrated 1" (25.4mm)-deep top pathway for routing communications cables. The base raceway cover conceals a 6.75" (171mm) high pathway.

Doors

The door frame is constructed of three extruded aluminum rails machined and connected by threaded fasteners. The vertical frame rails include machined openings that house a die-cast integral lock for engaging and locking panel connectors. The door jamb is constructed of two extruded aluminum stops that are machined and connected by threaded fasteners. The jambs are connected at the base by a steel threshold. The frame supports a 1.44" (36.6mm) thick hollow-core door. The door is surfaced with high-pressure laminate with plastic edges or a wood veneer surface with wood edges. Door assembly includes threshold, hinges, brushed chrome knobs or ADA lever, lock-and-key set, and integrated strike plate. The door is orderable with left or right-hand door swing and can be field modified to change the orientation. A removable top cap conceals a frame-integrated 1" (25.4mm) deep top pathway for routing communications cables.

Super Base Panel

Technical Specifications

The panel consists of four roll-formed, U-shaped, galvanized, 21-gauge (.033", 0.84mm) cold-rolled steel frame rails surrounding an expanded, multi-cell honeycomb core made of Kraft paper. Two perforated 0.0135" (.34mm) thick steel rust repellent coated skins are bonded to the rails and honeycomb with adhesive. The vertical panel frame rails include stamped openings that house a die-cast integral lock for engaging and locking panel connectors. Removable pads attach to the panel to provide an aesthetic covering and provide an overall panel thickness of 3" (76.2mm). Cables and power connectors can be mounted between the pads and the panel to provide easy access to power and communication located above the panel in separately specified stack kits. A removable top cap attaches to the top of the panel. The base raceway cover conceals a 6.75" (171mm) high pathway.

Stack Kit

The stack kit consists of two pads, a steel cross bar, and pad attachment brackets. It can be mounted above all panel types up to an overall height of 120" (3048mm). The assembled thickness of the stack kit is 3" (76.2mm). The cross bar is 1.25"(31.8mm) x 1.25"(31.8mm) with 18-gauge (.048", 1.2mm) steel wall tubing and 14-gauge (.075", 19mm) formed steel plates welded on the ends. The pad attachment brackets are two-piece assemblies constructed of molded plastic. The structural cross-bar is constructed in the same manner except an additional 1.25" (31.8mm) x .5" (12.7mm) "U" channel constructed of 1/8" (3.2mm) thick steel is welded 6" (152mm) below the top cross-bar. This cross-bar is required when off-modular overheads are attached to stack kits. Individual components for a stack kit can be specified to provide power and communication access.

Pads

All pad types have metal or plastic engagement flanges and steel brackets with hooks for attachment to panel connectors. All pad types, except for the base pads, have a light and sound block attached to the bottom.

- Painted pads are constructed of 21-gauge (.033", 0.84mm) steel and have a textured powder coat finish for standard finishes, and smooth powder coat for metallic finishes.
- Structural fabric pads are constructed of 21-gauge (.033", 0.84mm) steel with a 16-gauge (.060", 1.5mm) steel channel welded to the back-side of the pad. Fabric is bonded to the pad with adhesive.
- Fabric/Acoustical/Tackable pads have a 21-gauge (.033", 0.84mm) steel frame and a molded fiber-pad board that provides acoustic and tackable properties. For acoustic value a 1" (25.4 mm) thick fiberglass pad with foil backer is bonded to the molded fiber-pad board. Fabric is bonded to the frame with adhesive.
- Fabric/Tackable pads have a 21-gauge (.033", 0.84mm) steel frame and a molded fiber-pad board that provides tackable properties. Fabric is bonded to the frame with adhesive. Pads can be specified for power and communication access.
- Wood pads are constructed of wood composite board with wood veneer adhered to the front and a balancing veneer on the back. The edges are finished with black ebony veneer..
- Double pane glazed pads are constructed of two sets of four extruded aluminum rails machined and connected with threaded fasteners to form a frame which surrounds a 1/8" (3.2mm) thick pane of clear tempered glass. The frame rails have a powder coat finish.
- Single pane glazed pads are constructed of two sets of four extruded aluminum rails machined and connected with threaded fasteners to form a frame. One of the frames has a 1/8" (3.2mm) thick pane of clear tempered glass or .157" (4mm) thick pane of tempered glass with pattern. The frame rails have a powder coat finish.
- Open frame pads are constructed of two sets of four extruded aluminum rails machined and connected by threaded fasteners to form a frame. The frame rails have a powder coat finish.
- Translucent pads are constructed with four extruded aluminum rails machined and connected by threaded fasteners to form a frame. The frame surrounds a 1/8" (3.2mm) thick pane of white translucent acrylic material or translucent PETG material in various colors/patterns. The frame rails have a powder coat finish.
- Markerboard pads are constructed of wood composite board with a white markerboard laminate covering and balancing backer. A removable tray is attached to the pad.
- Slat pads are constructed of extruded aluminum with a powder coat finish and allow mounting of various types of paper and accessory management devices. Pads can be specified for power and communication access.
- Off-Modular pads are constructed of a combination of slat pad and other pad types constructed in the same manner as noted above. This pad type allows the attachment of panels in off-modular conditions.

Panel Connectors

Panel connectors are available for straight, two-, three-, and four-way – 90°, end-of-run, T-mount, off-modular

Technical Specifications

and wall mount conditions. Each connector type can also be specified as open base. Connectors are constructed of roll formed 16-gauge (.060", 1.5mm) steel seam welded to form a square tube. The tube is slotted to allow components to be mounted in 1" (25.4mm) increments and to allow the connection of panels and stack kits at various heights. A steel glide housing and two die cast zinc wings are inserted at the bottom of the connector. Light and sound blocks are installed the full length of the connector. A cold-headed steel leveling glide with a molded plastic foot is threaded into the glide housing. The glide provides 2" (50.8mm) of panel height adjustment and is supplied with a removable carpet gripper. Two- and three-way – 120° connectors are also available and are of similar construction, except there is only one die cast zinc wing inserted at the bottom of the connector and only one of the glides in the connector assembly will have a molded plastic foot. Two, three-, and four-way 90°, and two and three-way 120° connectors are created by attaching extruded aluminum corner connectors to the straight connectors. Corner connectors for 90° conditions allow the conversion to straight, two, three, and four way connectors by adding or removing straight connectors. A light and sound block is provided. The T-mount and off-modular connector is supplied with steel brackets for attaching to panels and stack kits. When specified as open base, a two-piece metal sleeve is provided to cover the glide and allow 2" of glide adjustment. The sleeve attaches to the connector with a plastic ring that has tabs that engage into slots on the connector.

Stackable (Straight Extended) Connector

Stackable straight extended connectors are constructed of roll-formed 16-gauge (.060", 1.5mm) steel, seam welded to form a square tube. The tube is slotted to allow components to be mounted in 1" (25.4mm) increments and to allow the in-line connection of panels and stack kits at various heights. The lower portion of the welded tube is swedge-formed to allow the connector to fit into the top portion of stackable and full-height panel connectors. A light and sound block and an anti-dislodgment mechanism are included with the assembly. Two, three, and four-way – 90° connectors are created by attaching extruded aluminum corner connectors to the straight connectors.

Trim Covers

Two- and three-way, end-of-run and variable-height covers are made of 22-gauge (.030", .76mm) roll-formed steel, and are available in painted, fabric or wood veneer. Trim pieces, such as plastic or wood top caps, raceway covers and top cap/vertical trim alignment devices are included where applicable.

Floor-to-Ceiling Stack Kits

The floor-to-ceiling connectors and the wall mount channel are made of aluminum extrusions with a black anodized coating. The ceiling track is an aluminum extrusion with a powder coat finish. A foam gasket is provided as a light and sound seal between the track and the ceiling. Trim covers are made of 22-gauge (.030", .76mm) roll formed steel, and are available in painted, fabric or wood veneer. The fabric pads are constructed of a wood composite core. Fabric is bonded to the core with adhesive. Each pad has a light and sound block attached to the bottom. The open frame pads are constructed of two sets of four extruded aluminum rails with a powder coat finish and connected by threaded fasteners to form a frame. The aluminum rails provide an area for inserting customer supplied glazing material .115" to .130" (2.9mm to 3.3mm) thick. Each frame has a light and sound block attached to the bottom.

Wing Walls (return panel alternative)

Wing Walls are constructed of 11/16" (17.5mm) thick wood composite material with laminate faces and 0.04" (1mm) thick edge band. Attachment and work surface support brackets are constructed of 12 gauge (.105", 2.7mm) steel. The glide housing is constructed of 14 gauge (.075", 1.9mm) steel. A cold-headed steel leveling glide with a molded plastic foot is threaded into the glide housing. The glide provides 2" (50.8mm) of height adjustment and is supplied with a removable carpet gripper.

Electrical Distribution System

The electrical distribution system is included with powered panels and can be specified for use in stack kits.

Technical Specifications

The system has eight-wires and can be specified with one, 3-circuit and two, 4-circuit wiring configurations. The system is UL listed and CUL certified (UL Mark for Canada). The system is 8-wire and available in 3 or 4 circuit configurations. The 3-circuit version has 3 hot conductors, 3 neutral conductors, 1 common ground, and 1 isolated ground. The wire gauge of the 3-circuit system's conductors is 12 American Wire Gauge (AWG). The 4-circuit has two versions; one is a 2 + 2 configuration and the other is a 3 + 1, both of which have 4 hot conductors, 2 neutral conductors, 1 common ground, and 1 isolated ground. The wire gauge of the 4-circuit system's conductors is 10 AWG for the neutral conductors and 12 AWG for the hot and ground conductors. All circuits for the 3 and 4-circuit systems are rated for 20 amps at 125 volts. The system has the ability to contain four (4) triplex receptacles per panel base raceway, two (2) per side, and four (4) triplex receptacles per stack kit, two (2) per side. Both wiring configurations provide multiple isolation and dedication of circuits. Receptacles are unique for each system. They are available in a 15 amp (NEMA 5-15R) or 20 amp (NEMA 5-20R) configurations with either common or isolated ground access. The 3-circuit 15 amp receptacles are field programmable to all three circuits. The 3-circuit, 20 amp receptacles and all 4-circuit receptacles are circuit specific. The 3-circuit 20 amp receptacles and all 4-circuit receptacles are circuit specific. The 6.75" (171mm) high x 3" (76mm) deep panel base pathway contains the power system and will accommodate communication cables. The 10" (254mm) and 16" (406mm) stack kits can contain the power system at beltline or standing-height and will accommodate communication cables. The system offers an electrical retro-fit kit that can be installed without removal of the panel or stack kit from the run. The system is an integral part of the panel, whether the electrical components are factory or field installed. An over-molded, flexible plastic enclosed eight-conductor flexible power connector with safety latches is included with each powered panel. A separately specified over-molded, flexible plastic enclosed eight-conductor straight-span power connector with safety latches is available for spanning power across three- and four-way non-powered panel junctions to continue power in an electrified panel run. Electrical power enters the panel at each end, top or bottom, or either side of the electrical base raceway at pre-punched locations with separately specified in-feeds. Several versions of in-feeds are available. A hardwire electrical system is also available. Optional field installed power options are available for field porting monolithic fabric panels for power and communication access below the worksurface or at beltline height.

Flip Top Electrical Units:

Flip Top electrical units are listed by Underwriters Laboratory for use in the United States and certified by UL to Canadian safety standards (UL and ULC). The units are available with a single sided configuration with two (2) or three (3) data and electrical outlets. The closed unit sits flush with the horizontal and a spring assist mechanism opens the top to provide access to electrical and data ports. Units are fed with either a single (3) conductor 12' black 15-Amp cord with plug or a 3 circuit version which consists of (3) 12 AWG wires enclosed within one 3/8" flexible metal conduit with a quick-connect modular end, or a hardwire version which consists of (3) 12 AWG wires enclosed within one 3/8" flexible metal conduit. Units include adapters for most types of field supplied data jacks, are standard with an anodized finish and include clips to secure it to the field cut opening in the worksurface or top.

Panel Attached Screens (Toppers)

Panel attached screens consist of two, 1.25" (31.8mm) diameter x 16 gauge (.060, 1.5mm) vertical steel columns with a threaded sleeve welded into one end. The post attaches to a threaded fastener that inserts into and compresses against the center slot of the panel's grooved top cap. A 7/16" (11.1mm) diameter rod with slots in each end attach to the top of the vertical columns and is held in place by two, pressure-fit, plastic end caps. Two screen types are available. The 1/8" thick translucent screen (white acrylic material or PETG material in various colors/patterns) attaches to the rod with plastic clips. The fabric scrim screen has the top and bottom edges hemmed to allow sliding over the rod and to slide in an additional rod at the bottom as a weight to hold the bottom of the screen in place. Screens can also be specified to share a vertical column between two units.

Desk and Floor Height Banners

Desk and floor height banners consist of two pieces of 7/16" (11.1mm) diameter steel rod welded together to form an "L". This assembly attaches to the panel connector with two, extruded aluminum brackets fastened to the connector with self drilling screws. Two screen types are available. The 1/8" thick translucent screen (white acrylic material or PETG material in various colors/patterns) attaches to the rod with plastic clips and is secured by plastic grips that clamp onto the edge of the screen. The fabric scrim screen has the top and bottom edges hemmed to allow sliding over the rod and to slide in an additional rod at the bottom as a weight to hold the bottom of the screen in place.

Panel Attached Canopies

Canopies consist of two, 1.25" (31.8mm) diameter x 16 gauge (.060, 1.5mm) vertical steel columns with a

Technical Specifications

threaded sleeve welded into one end. The post attaches to a threaded fastener that inserts into and compresses against the center slot of the panel's grooved top cap. The frame of the canopy is constructed of formed, 7/16" (11.1mm) diameter end rods that are pressure fit together at the top and screwed together at the bottom with 7/16" (11.1mm) x 16 gauge diameter horizontal rods. The canopy insert is constructed of fabric scrim that has hems to allow sliding the insert over the horizontal rods of the frame. Canopies can also be mounted to the top of panel attached screens.

Freestanding Screens

Freestanding screen consists of a welded tubular steel H-frame. Tubing is 1.25" (31.8mm) diameter x 16 gauge (.060, 1.5mm) wall. To provide stability, an axle tube is attached at the base of one of the frame legs. Each end of the axle tube has a plastic caster. A 7/16" (11.1mm) diameter rod with slots in each end attach to the top of the vertical tubes and is held in place by two, pressure-fit, plastic end caps. Three screen materials are available. The 1/8" thick translucent screen (white acrylic material or PETG material in various colors/patterns) and 1/8" thick marker board screen attach to the rod with plastic clips. The marker board material is a white acrylic plastic that is coated to allow the use of dry erase markers. The fabric scrim screen has the top and bottom edges hemmed to allow sliding over the rod and to slide in an additional rod at the bottom of the pad as a weight to hold the bottom of the screen in place. All screen inserts are secured along the bottom edge with plastic grips to prevent movement of the screen insert as the freestanding screen is moved.

Tackboards

Tackboards are 0.875" (22mm) thick and are made with two tackable fiber board skins adhered to a 1/8" (3.2mm) thick wood composite core. Tackboards have a fabric surface and are available in 5" (127mm) and 16" (406mm) heights and up to 60" (1524mm) wide. They include 14-gauge steel hooks that attach to panel connectors or wall track. A wall mount option is also available that attaches to building walls with screws and formed steel bracket.

Panel-Mounted Worksurfaces

Panel mounted worksurfaces are 1 3/16" (30.2mm) thick and are made with a wood composite core available in two core types.

- **Standard Core:** Made with an engineered composite panel with a minimum 90% wood fiber content with at least 10% post consumer and 80% pre-consumer wood fiber bonded with resin. These worksurfaces/tops are 3rd party certified compliant with GREENGUARD® and ANSI/BIFMA Standards for Low Emitting Products. The composite panel is 3rd party certified compliant with California Air Resource Board requirements for Phase 2 formaldehyde emission levels and includes wood fiber sourced from FSC certified forests using the 70% FSC Mix Credit System.
- **Green Core:** Made with an engineered composite panel with a minimum 90% pre-consumer wood fiber content bonded with no-added urea formaldehyde resin. These worksurfaces/tops are 3rd party certified compliant with GREENGUARD® and ANSI/BIFMA Standards for Low Emitting Products. The composite panel is 3rd party certified compliant with California Air Resource Board requirements for Phase 2 formaldehyde emission levels.

Laminate worksurfaces are balanced construction with high-pressure laminate on the top, a laminate backer on the bottom and are available with the following plastic edges:

- 0.118" (3mm) radius t-mold edge
- 0.118" (3mm) radius edge band on the user edge capped with a 0.039" (1mm) thick edge band on the remaining edge(s)
- .625" (16mm) thick with 1.22" (31mm) radius edge with a reverse chamfer at the bottom for the user edges with a 0.039" (1mm) edge band on the remaining edge(s).
- 0.118" (3mm) radius edgeband on the user edge with a 2" deep reverse chamfer capped with a 0.039" (1mm)-thick edgeband on the remaining edges. The exposed wood composite material on the bottom of the surface is sealed with a clear finish.

Wood veneer worksurfaces are balanced construction with wood veneer on the top, a balancing backer on the bottom and are available with the following wood edges:

- 0.118" (3mm) radius edge band on the user edge capped with a 0.028" (.7mm) thick edge band on the remaining edge(s).
- .625" (16mm) thick with 1.22" (31mm) radius edge with a reverse chamfer at the bottom for the user edges with a 0.028" (.7mm) edge band on the remaining edge(s).
- 0.118" (3mm) radius edgeband on the user edge with a 2" deep reverse chamfer capped with a 0.028" (.7mm) thick edgeband on the remaining edges. The exposed wood composite material is sealed with a clear finish.

Technical Specifications

Work surfaces are predrilled to accept installation of most common support methods. Work surfaces can be specified with a radius wire way, notched wire way, or no wire way. Worksurfaces are available in several configurations including the following: rectangular; rectangular key, swell, inverse swell, transition, wedge, radius end and split top; corner 90° straight front, wrap around, notched, angled, transitionals and extendeds; corner 120° wrap around; 120° link; D-shaped convergent and wrap around; rectangular convergent; D-shaped ender; counter top; radius and key conference ends.

Split-Top Worksurface

The front surface can support an extended computer keyboard, mouse pad, and document holder. The non-adjusting rear worksurface is cantilever-supported and attached to the panel side rails at 1"(25mm) increments. The front worksurface is attached to the underside of the rear worksurface by a spring-assisted adjustment arm. The front surface is user adjustable by lifting the front edge to unlock the self-locking mechanism and adjusts 7"(178mm) above and 5.75"(146mm) below the rear worksurface. This surface also features a tilt range of -15° to +9°.

Worksurface Support Brackets

Cantilever brackets are constructed of 12-gauge (.105", 2.7mm) steel. Left- and right-hand corner brackets are constructed of 14-gauge (.075", 1.90mm) steel; flush-mount plates are constructed of 11-gauge (.120", 3.05mm) steel. All brackets are coated with black recycled powdercoat when no finish color option is specified and powdercoated when a finish color is specified.

Worksurface End Panel

Worksurface end panel is 1-1/2" (38.1mm) thick and is constructed of a wood composite core frame with wood composite skin and laminate or wood veneer faces and 0.118" (3mm) radius plastic edge, or .118" (3mm) radius wood edge. Leveling glides provide 2.25" (57.2mm) adjustment range.

Straight Leg (Basic)

Straight leg is constructed of 2.25" (57.2mm) diameter x 16 gauge (.065", 1.65mm) steel tube welded to a 6" (152.4mm) diameter x 10 gauge (.135", 3.4mm) steel plate. A glass filled nylon insert is press fit into the leg and provides height adjustment of the leg from 25.75" to 29.75" (654mm to 756mm). Glide foot and caster foot are interchangeable.

Support Column

Column is constructed of 3" diameter (76mm) x 16 gauge (.065", 1.65mm) steel tube, with a 6" (152mm) square x 10 gauge (.135", 3.4mm) steel top plate. Column adjusts vertically to provide worksurface heights from 27" to 31.5" (686mm to 800mm).

Adjustable Height Disk Base

Base is constructed of 3" diameter (76mm) x 16 gauge (.065", 1.65mm) steel tube, with a 6" (152mm) square x 10 gauge (.135", 3.4mm) steel top plate welded to a threaded column that threads onto the base tube. This threaded mechanism adjusts vertically to provide work surface heights of 27" to 32" (686mm to 813mm). At the bottom of the tube a 21" (533mm) diameter x .250" (6.4mm) thick steel plate is attached with a threaded rod and nut. The tube, top plate and bottom disk are powder coated. Five (5) non-adjustable glides are attached to the bottom disk.

Legs (Moxie)

Straight leg is constructed of a 1.75" (57.2mm) diameter x 12 gauge (.109", 2.8mm) outer steel tube welded to a 6" (152mm) diameter x 10 gauge (.135", 3.4mm) steel plate. To provide height adjustment a 1.50" (38.1mm) diameter x .125" (3.2mm) thick steel tube fits within the outer tube. This construction provides height adjustment of the work surface from 26" to 32" (660mm to 813mm) in 1" (25.4mm) increments. Glide mounted to the end of the inner tube provides 1" (25.4mm) of leveling adjustment. An extruded black plastic sleeve covers the leveler. Leg is available as straight and angled. Angled leg has 14 degree angle. Leg is also available

Technical Specifications

with caster which is not interchangeable with the glide. Caster leg is height adjustable from 27" to 32" (686mm to 813mm) in 1" (25.4mm) increments.

Freestanding and Panel Mounted Support Leg

Leg is constructed of 1.75" (44.5mm) diameter x 12 gauge (.109", 2.8mm) outer steel tube with a 16 gauge (.065", 1.7mm) formed steel cross-bar welded to an 11 gauge (.120", 3.0mm) steel L-bracket. To that bracket is a screw mounted bracket assembly that can be field positioned to allow for right hand, left hand, or center mounting to the panel connector. Welded to the top of the tube is a 1.75" (44.5mm) x 4.5" (114.3mm) x 11 gauge (.120", 3.0mm) steel plate with holes for attaching the leg to the worksurface. To provide height adjustment a 1.50" (38.1mm) diameter x .125" (3.2mm) thick steel tube fits within the outer tube. This construction provides height adjustment of the work surface from 26" to 32" (660mm to 813mm) in 1" (25.4mm) increments. Glide mounted to the end of the inner tube provides 1" (25.4mm) of leveling adjustment. An extruded black plastic sleeve covers the leveler. This support leg is also available in freestanding versions that support the ends of either one or two convergent work surfaces. These versions use another 1.75" (44.5mm) diameter tube in place of the panel attachment bracket.

Table Tops

Table tops are 1 3/16" (30mm) thick and are made with a wood composite core. They are available with high pressure laminate or wood veneer top with a balancing backer. Laminate table edges are finished with .118" (3mm) radius plastic edge (t-mold or edge banding depending on the surface shape). Some shapes are available with .625" thick with 1.22" (31mm) radius edge with a reverse chamfer at the bottom for the user edges capped with a 0.039" (1mm) edge band on the remaining edge(s). Wood veneer tables are available with a .118" (3mm) radius wood edge band. Table tops are predrilled to accept installation of the table base/leg intended to be used with the top.

Three Leg Tables

Tables are supported by three angled legs with glides or castors. Optional table mounted screens or canopies available. Screens and canopies attach to bottom of work surface with screws. Screens are available with translucent material (white acrylic material or PETG material in various colors/patterns), fabric scrim, or markerboard.

Adjustable Keyboard Pads

Adjustable keyboard pads mount to the underside of a worksurface. Models offer a range of common features including the following:

- Pad widths from 17" (432mm) to 28" (711mm).
- 360-degree pivot and storage track to permit leg swing under worksurface.
- Height adjustment ranges from 8.4" (213.4mm) to 14" (355.6mm) depending on the model.
- When specified, Tilting Keyboard Pads offer up to 30 degrees of tilt.
- When specified Positive Tilt Lock option tray tilts -15°/+0°.
- A palm rest and mouse pad may be specified.

Pencil Drawers

Pencil Drawers are available for attachment to worksurfaces. The four types available are constructed as follows:

- 1.5" high injection-molded ABS pencil drawer with storage compartments
- 2.5" high injection-molded ABS pencil drawer with storage compartments
- Lockable steel center drawer with molded plastic storage compartments
- Pencil Plus Drawer – Injection molded plastic with optional lock that allows storage of office supplies in a shallow depth area at the front, with a removable tray to allow laptop storage.

Standard Mount Shelf and Standard and Off Modular Mount Overhead Storage Unit

Open Shelf Unit and Overhead Storage Unit, shelf, and optional top are constructed of 18 gauge (0.048", 1.2mm) steel with 16 gauge (0.060", 1.5mm) steel end panels. End panels have stamped hooks that allow attachment to panel connector slots. Unit is secured to the panel with an anti-dislodgement mechanism. Units can also be specified to mount to a formed steel bracket that attaches to the optional grooved top cap of the panel and allows off modular placement of the unit. Formed front edge of shelf conceals optional Task Light. Formed stop at top rear edge of shelf protects the panel face. Three unique door types are available and each can be specified with or without locks. Units are shipped unassembled. Horizontally hinged (flipper) doors open and recede over the cabinet and have steel ball bearing slides and hinges. A slow close mechanism is available for this door type. Vertically hinged (cabinet) doors have a steel center support for units 48" (1219mm) and wider. The

Technical Specifications

Up-Mount Shelf and Up-Mount Overhead Storage Units

Open Shelf Unit and Overhead Storage Unit, shelf, and optional top are constructed of 18 gauge (0.048", 1.2mm) steel with 16 gauge (0.060", 1.5mm) steel end panels. Formed front edge of shelf conceals optional Task Light. Formed stop at top rear edge of shelf protects the panel face. Unit attaches to panel connector slots with 14-gauge (.075", 1.9mm) formed steel brackets that allow the unit to be above the top of the panel. Overhead Storage Units can also be specified with brackets that allow off-modular attachment to the panel's grooved top cap. Unit is secured to the panel with an anti-dislodgement mechanism. The up-mount units with doors have a back constructed of 22 gauge (.030", .76mm) steel that attaches with keyhole slots and mechanical fasteners. The ends of the open shelf are held in place by a 0.500" (12.7mm) diameter steel rod that attaches to the top, back corner of the shelf ends. Three unique door types are available and each can be specified with or without locks. Units are shipped unassembled. Horizontally hinged (flipper) doors open and recede over the cabinet and have steel ball bearing slides and hinges. A slow close mechanism is available for this door type. Vertically hinged (cabinet) doors have a steel center support for units 48" (1219mm) and wider. The single sliding door has a steel divider that sections off half the unit. The vertically hinged and sliding door types require less than 4 pounds of force to operate. Each door is available with four surface options:

- Painted Door - 5/8" (15.8mm) thick formed with 22 gauge (0.030", 0.76mm) thick steel with powder coat finish.
- Wood Door - 11/16" (17.5mm) thick with a wood composite core and wood veneer over the face a balancing backer and wood veneer edge band.
- Laminate Door - 11/16" (17.5mm) thick with a wood composite core and a high pressure laminate over the face with a balancing backer and ABS edge band.
- Translucent Door – 0.730" (18.5mm) thick extruded aluminum frame with powder coat finish and a 1/8" thick translucent insert (white acrylic material or PETG material in various colors/patterns).

Wall Attached Overhead Storage Unit

Overhead storage unit shelf and top are constructed of 18-gauge (.048", 1.2mm) steel with 16-gauge (.060", 1.5mm) steel end panels. The optional back is constructed of 22-gauge (.030", .76mm) steel. Formed front edge of shelf conceals optional task light. Formed stop at top rear edge of shelf protects the wall. A 12 gauge steel formed "U" channel attaches to the end panels at the back of the unit and allows the unit to be attached to a structural wall with field supplied anchor/screws depending on wall type. Optional steel back is available to fully enclose the back of the unit. Three unique door types are available and each can be specified with or without locks. Units are shipped unassembled. Horizontally hinged (flipper) doors open and recede over the cabinet and have steel ball bearing slides and hinges. A slow close mechanism is available for this door type. Vertically hinged (cabinet) doors have a steel center support for units 48" (1219mm) and wider. The single sliding door has a steel divider that sections off half the unit. The vertically hinged and sliding door types require less than 4 pounds of force to operate. Each door is available with four surface options:

- Painted Door - 5/8" (15.8mm) thick formed with 22 gauge (0.030", 0.76mm) thick steel with powder coat finish
- Wood Door - 11/16" (17.5mm) thick with a wood composite core and wood veneer over the face a balancing backer and wood veneer edge band.
- Laminate Door - 11/16" (17.5mm) thick with a wood composite core and a high pressure laminate over the face with a balancing backer and ABS edge band.
- Translucent Door – 0.730" (18.5mm) thick extruded aluminum frame with powder coat finish and a 1/8" thick translucent insert (white acrylic material or PETG material in various colors/patterns).

Mini-Shelves

Shelves are made with .75" (19.05mm)-thick wood composite core with a high pressure laminate face and back and .039" (1mm) thick edgeband.

Technical Specifications

Shelf Mounted Task Light

Task lights have an Energy Star® rated electronic ballast. They have a T8 3500K Tri-Phosphor Octic lamp with low mercury content and are rated for a 20,000 hour life. Lamp wattage is 13W for 24" (762mm) wide lights, 17W for 36" (914mm) wide lights, 25W for 42" (1067mm) wide lights and 32W for 54" (1372mm) wide lights. A six foot long, black, cord with three conductor plug is factory installed on right side and may be field-installed on left side of 42" (1067mm) and 54" (1372mm) units. An optional 9' cord is available. The Chicago version has a plug with an integral 3-amp re-settable circuit breaker. Lights are standard with an acrylic lens featuring a pyramid shaped prism pattern that reduces reflected glare. An optional batwing lens consisting of a series of prisms that distributes light patterns to the left and right of the observer and further reduces reflective glare is available. Lights 42" (1067mm) wide and 54" (1372mm) wide can be specified for daisy chain applications allowing up to 5 lights to be powered by a single cord with plug. Lights are listed by Underwriters Laboratory for use in the United States and certified by UL to Canadian Standards. Task lights include mounting brackets for attaching under shelves and screws for attaching under countertops. The lights are concealed behind the front edge of the shelf.

LED Task Lights

The Stand-Alone LED Task Light has a peak output of 444 Lumens/ 76 Foot Candles at 7.8 Watts. Power cord consists of a 15 Watt 24 V transformer power supply contained in a molded plug and a 9' black cord. Fixture housing is 16.4" (417mm) long x 2" (51mm) wide x 0.5" (12 mm) high.

The Starter LED Task Lights have peak outputs of 444/980/1412/1791 Lumens, 76/131/148/151 Foot Candles, and 7.8/17.6/25.9/33.6 Watts for fixture lengths of 17" (431.8mm)/31" (787.4mm)/44" (1117.6mm)/58" (1473.2mm) respectively. Power cord consists of a 60 Watt 24 V in-line brick transformer with a 12' (304.80mm) black cord. Actual fixture housings are 30.1" (764.54mm), 43.7" (1110.0mm), or 57.4" (1458 mm) long x 2" (50.8mm) wide x 0.5" (12.7mm) high.

Add-On LED Task Lights fixtures are identical to Starter LED Light fixtures but contain a 54" (1371.6mm) black inter-link cord instead of a power cord. Add-On LED Task Lights are used in conjunction with Starter LED Task Lights to form a Daisy Chain configuration.

All LED light fixtures have a color temperature of 3500 and a CRI of 84. Lights employ a touch sensitive switch with touch-and-hold continuous dimming from 100% to 15% and single touch on/off power. An auto off feature on each fixture activates after 10 hours (+/- 15 minutes) of use. Mounting options include clips with screws for attachment to wood/laminate surfaces or clips with magnets for attachment to steel surfaces. Fixtures carry the ETL mark indicating conformance to UL 153 and certified to CAN/CSA C22.2 No. 9.

LED Occupancy Sensor

A passive infrared (PIR) interlink occupancy sensor can be added to single or multiple interconnected (daisy-chained) LED Task Lights. The sensor will automatically turn off the lights after 30 minutes of no detection and back on as the user re-enters the workspace. In a daisy-chain application all fixtures connected after the sensor will be controlled. Sensor is attached to LED fixtures with either a 1" (25.4mm) long end-to-end connector or an interlink cord. Sensor is 2.3" (58.4mm) long x 2" (50.8mm) wide x 0.7" (17.78mm) high.

Paper Management

Paper management units are available in diagonal, horizontal, and vertical configurations. Diagonal units may be field-modified for right-hand or left-hand use. Units are made of painted wire form frames with sheet steel trays to allow open view of contents. A mounting bar is available to install in connector slots and support paper management units.

Information Display

Tackboards, tack strips, markerboards, wall accessory slat pads, panel mounted and work surface mounted tool rails with paper management devices are available and provide information display space. Monitor arms are also available.

Translucent Material

Solid – .118" (3mm) thick acrylic with frosted finish on both sides.

Patterned – polyester textile with moire design embedded in .118" (3mm) thick polyethylene blend (PETG).

Table of Contents

Foundation Elements — Monolithic Panels

Fabric Surface — Standard or No Top Cap	288
Fabric Surface — Grooved Top Cap	290
Fabric Surface — Wood Top Cap	292

Monolithic Pad Elements

Monolithic Single Pad	295
-----------------------------	-----

Foundation Elements — Monolithic Panels

Glazed — Standard or Wood Top Cap	296
---	-----

Panel Accessories

Sliding Door	298
Filler Post — Sliding Door	298

Foundation Elements — Monolithic Panels

Single Door and Frame — Standard or Wood Top Cap	299
---	-----

Visual Privacy Elements

Enhanced PREMISE — for Monolithic/Stack Applications .	300
--	-----

Foundation Elements — Super Base Panel

Standard or No Top Cap	302
Grooved Top Cap	308, 311, 312
Wood Top Cap	314
Standard, Grooved, Wood Top Cap, or No Top Cap — Translucent Pads	322
Standard, Grooved, Wood Top Cap, or No Top Cap	324
Single Pad	326
Off-Modular Single Pad	328

Panel Connectors and Trim Covers

Straight Full-Height Connector	332
Straight Pre-Configured (Sectional) Connector	333
Straight Extended Connectors	334
2-Way 90°, Full-Height Connector with Full-Height Cover ..	335
2-Way 90°, Full-Height Connector with Pre-Configured (Sectional) Cover	338
2-Way 90°, Extended Connector with Cover	342
2-Way 120°, Full-Height Connector with Full-Height Cover ..	344
3-Way 90°, Full-Height Connector with Full-Height Cover ..	346
3-Way 90°, Full-Height Connector with Pre-Configured (Sectional) Cover	350
3-Way 120°, Full-Height Connector	353
3-Way 90°, Extended Connector with Cover	354
4-Way 90°, Full-Height Connector	356
4-Way 90°, Extended Connector	358
End-of-Run, Full-Height Connector with Full-Height Cover ..	360
End-of-Run, Full-Height Connector with Pre-Configured (Sectional) Cover	364
Extended Connector with Cover	367
T-Mount Kit	368
Center Mount Bracket	369
Grooved T-Mount Bracket	369
Off-Modular T-Mount Kit	370
Wall Mount Kit	371
Heavy Load Stabilizer Bar for Monolithic Panels	372
Heavy Load Stabilizer Bar for Stack Kits	372
Corner Connector Bracket	373
Grooved Top Cap	373
Variable-Height Covers — Full-Height Cover	374
Variable-Height Covers — Sectional Cover	380, 382, 383
Variable-Height Covers — Starter Cover	386
Extended Variable-Height Covers	389

Transitional Panel Connectors

Enhanced PREMISE Straight Connector to 4" PREMISE Monolithic Panel	390
---	-----

Enhanced PREMISE Straight Connector to 4" PREMISE Stack Panel	390
--	-----

Transitional Power Connectors

Enhanced 3-Circuit PREMISE to 4" PREMISE Flexible Power Connector	391
--	-----

Panel Complements

Full Height One-Piece	392
Full Height Two-Piece	393
Lower Unit	394
Upper Unit	395
Center Mount Hardware	396

Upper Structure Elements — Stack Kits

10" Stack Kit	397
10" Translucent Stack Kit	403
16" Stack Kit	404
16" Translucent Stack Kit	410
16" Single Pane Glazed Stack Kit	411
16" Double Pane Glazed Stack Kit	411
16" Open Stack Kit	412
16" Stack Kit — Structural Cross Bar	413

Upper Structure Elements — Stack Components

Standard Cross Bar	415
Structural Cross Bar	415
10" Single Pad	416
10" Translucent Pad	418
PREMISE — 10" Single Technology Fabric Pad	418
10" Single Markerboard Pad	419
16" Single Markerboard Pad	419
32" Single Markerboard Pad	420
16" Single Pad	422
16" Translucent Pad	424
Single Pane Pads — 16" Frame with Glazing	425
Double Pane Pads — 16" Frame with Glazing	425
16" Open Frame Pads	426
PREMISE — 16" Single Technology Fabric Pad	427
PREMISE — 16" Single Technology Slat Pad	428

Upper Structure Elements — Floor-to-Ceiling

Floor-to-Ceiling Track	429
Floor-to-Ceiling Straight Connector	429
Floor-to-Ceiling 2-Way Connector with Cover	430
Floor-to-Ceiling 3-Way Connector with Cover	431
Floor-to-Ceiling 4-Way Connector with Cover	432
Floor-to-Ceiling End-of-Run Connector with Cover	433
Floor-to-Ceiling Variable-Height Cover	434
Floor-to-Ceiling Wall Mount Kit	435
Floor-to-Ceiling Pads	436
Open Frame for Glazing	437

Visual Privacy Elements — Panel Attached

Fabric Scrim — Stand Alone Kit	438
Translucent — Stand Alone Kit	438
Fabric Scrim — Shared Kit	439
Translucent — Shared Kit	439
Support Grips	440
Fabric Scrim Insert	441
Translucent Insert	441
Fabric Scrim	442
Translucent	442
Canopy — Top Cap Mount	443
Double Canopy — Double Top Cap Mount	443
Canopy — Topper Mount	443

Table of Contents

Visual Privacy Elements — Worktop Mounted Screens

Fabric Scrim — Stand Alone Kit	444
Translucent — Stand Alone Kit	444
Markerboard — Stand Alone Kit	445
Fabric Scrim — Stand Alone Kit	446
Translucent — Stand Alone Kit	446
Markerboard — Stand Alone Kit	447
Worktop Mounted Screen Canopy	448

Visual Privacy Elements

Fabric Scrim Insert	449
Translucent Insert	449
Markerboard Insert	450
Perforated Metal Insert	451
Frosted Insert	451
Markerboard / Frosted Insert	452
Markerboard / Perforated Metal Insert	452

PREMISE 3-Circuit – Electrical Components

Base Feed Module – Hardwire Connection	453
Single Circuit Base Feed Module – Receptacle Connection with Power Cord	453, 454
Base Feed Module – Concealed Hardwire Connection	454
Raised Floor Infeed Base Feed Module	454
System Furniture Power Interface Jumper	455
Wall Feed Field Wired 1 Port	455
Monolithic Panel Top Feed Module	456
Stackable Panel Top Feed Module	457
External Top Feed Module	458
Floor-to-Ceiling Monolithic and Super Base Panel Top Feed Module	459
Infeed Harness	460
Power Kit for Stack Application	461
Stack Application Retrofit Kit	462
Structural Power Kit for Stack Application	463
Super Base Panel-to-Stack Kit Beltline Vertical Power Connector	464
Super Base Panel-to-Stack Kit Standing Height Vertical Power	464
Flexible Power Connector	465
Straight-Span Flexible Power Connector	466
Extended Flexible Metal Power Connectors for Base Raceway	467
Triplex Receptacles – 15 Amp	468
Triplex Receptacles – 20 Amp	468
Power Break Marker	468
Power/Communication Port Kit – for use with Monolithic Panel	469
Power/Communication Port Kit – Back-to-Back – for use with Monolithic Panel	470
Base Raceway Retrofit Kit – Powered	471
Power Distribution Support Bracket	471

PREMISE Electrical Components

Raceway Cover without Power/Communications Access ...	472
Raceway Cover with Power Access – One Side	472
Raceway Cover with Power Access – Two Sides	472
Raceway Cover with Power and Single Gang Communications Access – One Side	472
Raceway Cover with Power and Single Gang Communications Access – Two Sides	473
Raceway Cover with Power and Modular Furniture Telecommunications Outlet Plate Communication Access – One Side	473
Raceway Cover with Power and Modular Furniture Telecommunications Outlet Plate Communication Access – Two Sides	473

PREMISE 4-Circuit (2+2 and 3+1) – Electrical Components

Base Feed Module – Hardwire Connection	474
Single Circuit Base Feed Module – Receptacle Connection with Power Cord	474, 475
Base Feed Module – Concealed Hardwire Connection	476
Raised Floor Infeed Base Feed Module	476
Systems Furniture Power Interface Jumper	477
Wall Feed Field Wired 1 Port	477
Monolithic Panel Top Feed Module	478
Stackable Panel Top Feed Module	479
External Top Feed Module	480
Floor-to-Ceiling Monolithic and Super Base Panel Top Feed Module	481
Infeed Harness	482
Power Kit for Stack Application	483
Stack Application Retrofit Kit	484
Structural Power Kit for Stack Application	485

PREMISE 4-Circuit (2+2 and 3+1) – Electrical Accessories

Super Base Panel-to-Stack Kit Beltline Vertical Power Connector	486
Super Base Panel-to-Stack Kit Standing Height Vertical Power	486

PREMISE 4-Circuit (2+2 and 3+1) – Electrical Components

Flexible Power Connector	487
Straight-Span Flexible Power Connector	488
Extended Flexible Metal Power Connectors for Base Raceway	489
Triplex Receptacles – 15 Amp	490
Triplex Receptacles – 20 Amp	491
Power Break Marker	491
Power/Communication Port Kit – for use with Monolithic Panel	492
Power/Communication Port Kit – Back-to-Back – for use with Monolithic Panel	493
Base Raceway Retrofit Kit – Powered	494

PREMISE Electrical Components

Raceway Cover without Power/Communications Access ...	495
Raceway Cover with Power Access – One Side	495
Raceway Cover with Power Access – Two Sides	495
Raceway Cover with Power and Single Gang Communications Access – One Side	495
Raceway Cover with Power and Single Gang Communications Access – Two Sides	496
Raceway Cover with Power and Modular Furniture Telecommunications Outlet Plate Communication Access – One Side	496
Raceway Cover with Power and Modular Furniture Telecommunications Outlet Plate Communication Access – Two Sides	496
Power and Communication Bezel for Fabric/Tackable Pad ..	497

Electrical and Communication Accessories

Desktop Port	498
Power/Data Dome	498
Worksurface Grommet	498
Enhanced Power Module	499
Flip Top Unit	500
Vertical Wire Manager	501
Horizontal Wire Manager	501
Worksurface Grommet	501
Wire Management Loop	501
Monolithic Panel Communications Port Kit	502

Table of Contents

Information Plate Communication Port Kits	502	Worksurface Height Adjustment Kit for Attached Pedestal ..	598
Cable Hanger	503	Straight Leg Basic	598
Vertical Cable Guide	503	Support Column	598
Single Gang Communication Adaptor Plate	503	Adjustable Height Disc Base	598
Cable Trough	503	Legs	599
Cable Reel	504	Double Support Leg	599
Straight Cable Guide	504	Single Support Leg	599
90° Corner Cable Guide	504	Support Post	600
PREMISE Hardwire Electrical Components		Freestanding Worksurface Support Leg	601
Base Feed Module	506	Worksurface Support Leg — Panel Mounted	601
Electrical Raceway Kit — Base	506	Worksurface Accessories	
Electrical Raceway Kit — Beltline or Standing Height	507	Horizontal Wire Manager	602
Powered Panel Port Kit	507	Worksurface Grommet	602
Receptacle Cover	507	Wire Management Loop	602
Monolithic Panel Top Feed Module	508	Make-A-Corner	602
Stack Kit on Monolithic or Super Base Panel Top Feed Module	508	Worksurface Reinforcement Channel	603
External Top Feed Module	509	Shallow Drawer	604
Adaptable Worksurfaces		Pencil Drawer	604
Rectangular	510, 554	Steel Center Drawer	604
Rectangular Key	513, 557	Pencil + Drawer	604
Rectangular Swell	514, 558	Boogie Board	
Rectangular Inverse Swell	515, 559	Boogie Board Keyboard Tray with Palm Rest and Integrated Mouse Pad	605
Rectangular Transition	516, 560	Boogie Board Keyboard Tray with Palm Rest	605
Wedge	518, 562	Boogie Board Mouse Pad	605
Sharp Wedge	520, 564	Adjustable Keyboard Pads	
Rectangular Radius End	521, 565	Locking Tilt AKP	606
Rectangular — Split Top	522, 566	Dial Tilt AKP	606
Corner, 90° Straight Front	523, 567	Dial Tilt AKP - Extended Arm	607
Corner, 90° Wrap-Around	524, 568	Sit-to-Stand AKP	607
Corner, 90° Notched	525, 569	Keyboard Trays - included with Number KU AKP Arm	608
Corner, 90° Angled	526, 570	Thin Profile AKP	609
Corner, 90° Wrap-Around Transitional	527, 571	Advanced Adjustable Monitor Arms	610
Corner, 90° Notched Transitional	528, 572	Monitor Arms	
Corner, 90° Angled Transitional	529, 573	Post and Link Monitor Arms	611
Corner, 90° Split Top	530, 574	Heavy Duty Adjustable Monitor Arms	611
Corner, 90° Wrap-Around Extended	532, 576	Adjustable Post Arm	612
Corner, 90° Notched Extended	534, 578	Extend Arm	612
Corner, 90° Wrap-Around Transitional Extended	536, 580	CPU Holders	
90° Merger	539, 582	Fixed Mount CPU Holder	613
Corner, 120° Wrap-Around	540, 583	Adjustable CPU Holder	613
D-Shaped Convergent	541, 584	Accessories	
Rectangular Convergent	542, 585	Adjustable Laptop Holder	614
D-Shaped Convergent, Wrap-Around	544, 586	Adjustable Document Holder	614
D-Shaped Ender	546, 587	Adjustable Footrest	614
Bent	547, 588	Adaptable Upper Storage	
Countertop	548, 589	Shelf	615
Conference End	550, 590	Up Mount Shelf	615
Key Conference End	551, 591	Straight Mini Shelf	616
120° Link	552, 592	Corner Mini Shelf	616
Adaptable Worksurface Supports		Up Mount Bracket Shelf	616
Standard Cantilever Bracket	593	Overhead Storage Unit, Standard Mount	617-620
Standard Shared Cantilever Bracket	593	Overhead Storage Unit, Up Mount	621-624
Standard Mini Cantilever Bracket	593	Overhead Storage Unit, Standard Off-Modular, Flipper Door	625
Shared Mini Cantilever Bracket	594	Overhead Storage Unit, Up Mount Off-Modular, Flipper Door	626
Off-Modular Worksurface Bracket	594		
Side Bracket	594		
Flush Mount Plate	595		
Side Bracket for use with Knife Edge	595		
Rear-Corner Bracket	595		
Countertop Bracket	595		
Anti Dislodgement Bracket — Only for use with Worksurface Support Panels	596		
Pedestal-to-Panel Bracket	596		
Worksurface Supports			

Table of Contents

Wall Mount Components

Overhead Storage Unit, Wall Mount – Painted Door	627
Overhead Storage Unit, Wall Mount – Translucent Door	628
Overhead Storage Unit, Wall Mount – Wood Door	629
Overhead Storage Unit, Wall Mount – Laminate Door	630
Worksurface to Wall Bracket	631
Back for Wall Mounted Overhead Storage Unit	631
Shelf Dividers	631
Overhead Storage Unit / Shelf Gang Clip	632
Wall Track	632
Tackboard, Wall Mount	633
Markerboard, Wall Mount	633
Slat, Wall Mount	633

Lighting

Reed Premier™ Stand-Alone LED Task Light	634
Reed Premier™ Starter LED Task Light	634
Reed Premier™ Add-On LED Task Light — For Use with Reed Premier Starter LED Task Lights	635
Reed Premier™ Add-On Occupancy Sensor	635
Adaptable Electronic Ballast Task Light	636
Adaptable Electronic Ballast Task Light (Starter Light)	636
Adaptable Electronic Ballast Task Light (Add-On Light)	637
Pixo	638
Voyage without Occupancy Sensor	638
Voyage with Occupancy Sensor	638

BRAZO

Freestanding Lighting	639
Mounted Lighting	639
Grommet — For Use with BRAZO Grommet Mounted Light Only	639

LIM

LIM L	640
LIM C	641
LIM Y	641
LIM Mounted	642, 643
LIM Hardware	643

Task Organization

Wall Accessory Slat Pad	644
-------------------------	-----

Belong Work Tools Mounting Rails

Tool Rail — Panel Mount — Single Side	645
Tool Rail — Worksurface Mount C-Clamp or Thru-Mount	646
Tool Rail — Single Post — C-Clamp or Thru-Mount	647

Belong Work Tools

Open C Cubby	648
Paper Tray — Landscape	648
Tool Cup	648

Work Tools

Binder Bin	649
Tote	649
Tack Strip	649
Gooseneck Kit	649
Mini Shelf	649
Phone Shelf	650
Phone Shelf Bracket	650
Personal Shelf	650
Personal Shelf Bracket	650
Paper Sorter	650
Tool Cup	651
Letter Tray	651
Waste Bin	652
Letter Tray Stacking Kit	652

Letter Tray Stacking Bracket	652
Tote Strap	652
File Master Kit	653
Task Master Kit	653
Mini Master Kit	653
Panel Mount Rail	654
Worksurface Mount Rail	654
Freestanding Mount Rail	655
Phone Shelf	656
Personal Shelf	656
Paper Sorter	656
Team Master Kit	657
File Master Kit	657
Task Master Kit	657
Mini Master Kit	658
Tack Strip	659
Tackboard	659
Markerboard	659
All Purpose Hooks	659

Belong® Work Tools

Markerboard Accessories	660
-------------------------	-----

Concentrative Tables

120° with Glides or Casters	661
90° with Glides or Casters	662
60° with Glides or Casters	663
Collaborative with Glides or Casters	664
Symmetric with Glides or Casters	665
Asymmetric with Glides or Casters	666

Tables

Round — Laminate or Wood Top	667
Rectangular — Laminate or Wood Top	667
Teardrop — Laminate Top	668
Bean — Laminate Top	668
Bend — Laminate Top	668

X Series Attached Pedestals

Pencil/Pencil/Box/File — Attached	670
Box/Box/File — Attached	670
File/File — Attached	670, 671

V Series Attached and Suspended Pedestals

Box/Box/File — Attached	672
File/File — Attached	672

X Series Lateral Files

Two-High Lateral File — Proud Style — Attached	673
Two-High Lateral File — Inset Style — Attached	674

V Series Lateral Files

Two-High — Attached	675
---------------------	-----

X Series and V Series Accessories

Worksurface Height Adjustment Kit for Attached Lateral File, Storage Cabinet and Combination Unit	676
Filing Kit	676

X Series Storage Cabinets

Two-High Storage — Attached	677
Two-High Combination — Attached	678

X Series Combination Units


Two-High Combination — Attached	680
---------------------------------	-----

Table of Contents


Finishes and Fabrics	
Finish/Color Legend	682-685
Systems Fabrics/Color Legend.....	686-687
COM Yardage Requirements.....	688-691
Terms of Sale	
North American.....	692-695
Index	696-712
Lifetime Product Warranty	Inside Back Cover

Foundation Elements — Monolithic Panels


Fabric Surface – Standard or No Top Cap



NMFF-SN
(Non-Powered)



NMFF-SA
(Open Base)



NMFF-SP
(3-Circuit Powered)



NOTES:

18" (457mm) wide panels are non-powered only. Specify extended power connectors to continue power through 18" (457mm) panels.

Receptacle ports on the raceway cover measure 2" (51mm) top-to-bottom and 4 3/4" (121mm) side-to-side.

Powered panels with raceway covers ship with receptacle ports in the **base** raceway cover. Non-powered panels ship without receptacle ports in the **base** raceway cover. Powered panels with PDA but without raceway covers require separately specified base raceway covers for power and communication port locations other than the standard powered base raceway cover.

New York City (NYC) electrical applications require field installation of Power Distribution Assemblies (PDA). See Power Specifications on this page for details.

New York Port Authority (NYPA) electrical applications require metal raceway covers. See Power Specifications on this page for details.

Some building codes may restrict the use of panel heights greater than 69" (1753mm). Consult your local code authority to assure that the furniture layout is compliant prior to installation.

Features

- **Non-powered and powered panels** include panel assembly, panel locks, with or without painted top cap, with or without one-piece raceway cover; power distribution assembly/flex connector(s) when power is specified, and attachment hardware.
- **Open base panels** include panel assembly, panel locks, with or without painted top cap, and attachment hardware.
- **Tackable, acoustical panel surfaces.**
- Panel surfaces may have the same fabric on both sides or a different fabric on each side.
- Monolithic panel thickness is 3" (76mm).
- Top raceway is 2" (51mm) deep; base raceway is 6 3/4" (171mm) high.
- Powered panels are available for countries that utilize 120 volt 60 hertz electrical systems and U.S. configured plugs and outlets.
- Shipped with unassembled top cap and base raceway cover (if applicable).
- ◆ Available on RUSH with non-powered or open base raceway and 3-circuit and 4-circuit powered raceway.

Specification Tips

- Connectors are required to create panel runs and intersections; specify separately.
- Monolithic panels will accept upper structure elements up to 120" (3048mm). See the product application guideline section for planning rules.
- No top cap option is offered to reduce the number of top cap seams within a panel run. To be used with a separately specified grooved top cap long enough to span more than one panel. Refer to Grooved Top Cap for application details.
- No top cap option must be used with a separately specified grooved top cap.
- Flex connectors provided for powered monolithic panels accommodate straight in-line, inside 90°, and inside 120° conditions (if applicable). See price list for additional flex connector applications.
- Powered monolithic panels will only accept triplex receptacles; specify separately.
- Open base is not available with power or base raceway cover.
- 3-circuit and 4-circuit powered panels can be field retrofitted for beltline power with the Power/Communication Port Kit.
- Use extended power connectors to pass through 18" (457mm) or 24" (610mm) non-powered panel.
- Base raceway is 6 3/4" (171mm) high for all power options.
- Do not mix 3-circuit with 4-circuit components. Do not mix 2+2 and 3+1 components. Components have unique polarity key and color coding.
- 3-circuit and 4-circuit power options include power distribution assembly, flex connector and powered raceway cover.
- New York City (NYC) and New York Port Authority (NYPA) electrical applications require field installation of Power Distribution Assembly (PDA).
- Hardwire option includes powered raceway cover only. Separately specify hardwire electrical kit for base raceway.
- Raceway cover needs to be separately specified for no raceway cover option.

To Order, Specify:

1) Product number, including:

① Top Cap Option:

- S** Standard
- 5** No Top Cap, deduct **\$58.43** list

② Base Option:

- N** Non-Powered
- M** Non-Powered, NYPA, add **\$108.68** list
- A** Open Base

3-Circuit: 24"-60" wide

- P** 3-Circuit, add **\$198.64** list
- Y** 3-Circuit – NYC, add **\$177.61** list
- R** 3-Circuit – NYPA, add **\$286.29** list
- E** 3-Circuit – No raceway cover option with PDA, add **\$191.63** list
- C** Hardwire with raceway

4-Circuit: 24"-60" wide

- 2** 4-Circuit – 2+2, add **\$206.83** list
- W** 4-Circuit – 2+2 NYC, add **\$185.80** list
- T** 4-Circuit – 2+2 NYPA, add **\$294.48** list
- H** 4-Circuit – 2+2 no raceway cover option with PDA, add **\$199.82** list
- 4** 4-Circuit – 3+1, add **\$206.83** list
- V** 4-Circuit – 3+1 NYC, add **\$185.80** list
- S** 4-Circuit – 3+1 NYPA, add **\$294.48** list
- D** 4-Circuit – 3+1 no raceway cover option with PDA, add **\$199.82** list

- 2) Fabric/colorway for side one.*
- 3) Fabric/colorway for side two.*
- 4) Trim color for base raceway cover (if applicable).*
- 5) Trim color for top cap (if applicable).*

*Note: Upcharge for mixed grade fabric or trim surfaces, refer to the electronic catalog for pricing.

Foundation Elements — Monolithic Panels


Fabric Surface – Standard or No Top Cap

Width	Number	①②	Trim A Fabric Grade		C	E	F	G	Trim B Fabric Grade		C	E	F	G
			A	B					A	B				
32"(813mm) High														
18"(457mm)	NMFF-3218-	■ ■	\$ 442.88	\$ 465.08	\$ 468.36	\$ 475.60	\$ 480.28	\$ 482.60	\$ 464.05	\$ 486.25	\$ 489.53	\$ 496.77	\$ 501.45	\$ 503.77
24"(610mm)	NMFF-3224-	■ ■	501.30	532.86	545.48	573.76	593.04	604.12	522.47	554.03	566.65	594.93	614.21	625.29
30"(762mm)	NMFF-3230-	■ ■	559.72	600.64	622.60	671.92	705.80	725.64	580.89	621.81	643.77	693.09	726.97	746.81
36"(914mm)	NMFF-3236-	■ ■	618.14	668.42	699.72	770.08	818.56	847.16	639.31	689.59	720.89	791.25	839.73	868.33
42"(1067mm)	NMFF-3242-	■ ■	676.56	736.20	776.84	868.24	931.32	968.68	697.73	757.37	798.01	889.41	952.49	989.85
48"(1219mm)	NMFF-3248-	■ ■	734.98	803.98	853.96	966.40	1044.08	1090.20	756.15	825.15	875.13	987.57	1065.25	1111.37
60"(1524mm)	NMFF-3260-	■ ■	851.82	939.54	1008.20	1162.72	1269.60	1333.24	872.99	960.71	1029.37	1183.89	1290.77	1354.41
42"(1067mm) High														
18"(457mm)	NMFF-4218-	■ ■	\$ 466.28	\$ 493.28	\$ 498.76	\$ 515.40	\$ 524.88	\$ 531.60	\$ 487.45	\$ 514.45	\$ 519.93	\$ 536.57	\$ 546.05	\$ 552.77
24"(610mm)	NMFF-4224-	■ ■	524.70	561.06	575.88	613.56	637.64	653.12	545.87	582.23	597.05	634.73	658.81	674.29
30"(762mm)	NMFF-4230-	■ ■	583.12	628.84	653.00	711.72	750.40	774.64	604.29	650.01	674.17	732.89	771.57	795.81
36"(914mm)	NMFF-4236-	■ ■	641.54	696.62	730.12	809.88	863.16	896.16	662.71	717.79	751.29	831.05	884.33	917.33
42"(1067mm)	NMFF-4242-	■ ■	699.96	764.40	807.24	908.04	975.92	1017.68	721.13	785.57	828.41	929.21	997.09	1038.85
48"(1219mm)	NMFF-4248-	■ ■	758.38	832.18	884.36	1006.20	1088.68	1139.20	779.55	853.35	905.53	1027.37	1109.85	1160.37
60"(1524mm)	NMFF-4260-	■ ■	875.22	967.74	1038.60	1202.52	1314.20	1382.24	896.39	988.91	1059.77	1223.69	1335.37	1403.41
48"(1219mm) High														
18"(457mm)	NMFF-4818-	■ ■	\$ 480.32	\$ 510.20	\$ 517.00	\$ 539.28	\$ 551.64	\$ 561.00	\$ 501.49	\$ 531.37	\$ 538.17	\$ 560.45	\$ 572.81	\$ 582.17
24"(610mm)	NMFF-4824-	■ ■	538.74	577.98	594.12	637.44	664.40	682.52	559.91	599.15	615.29	658.61	685.57	703.69
30"(762mm)	NMFF-4830-	■ ■	597.16	645.76	671.24	735.60	777.16	804.04	618.33	666.93	692.41	756.77	798.33	825.21
36"(914mm)	NMFF-4836-	■ ■	655.58	713.54	748.36	833.76	889.92	925.56	676.75	734.71	769.53	854.93	911.09	946.73
42"(1067mm)	NMFF-4842-	■ ■	714.00	781.32	825.48	931.92	1002.68	1047.08	735.17	802.49	846.65	953.09	1023.85	1068.25
48"(1219mm)	NMFF-4848-	■ ■	772.42	849.10	902.60	1030.08	1115.44	1168.60	793.59	870.27	923.77	1051.25	1136.61	1189.77
60"(1524mm)	NMFF-4860-	■ ■	889.26	984.66	1056.84	1226.40	1340.96	1411.64	910.43	1005.83	1078.01	1247.57	1362.13	1432.81
53"(1346mm) High														
18"(457mm)	NMFF-5318-	■ ■	\$ 492.02	\$ 524.30	\$ 532.20	\$ 559.18	\$ 573.94	\$ 585.50	\$ 513.19	\$ 545.47	\$ 553.37	\$ 580.35	\$ 595.11	\$ 606.67
24"(610mm)	NMFF-5324-	■ ■	550.44	592.08	609.32	657.34	686.70	707.02	571.61	613.25	630.49	678.51	707.87	728.19
30"(762mm)	NMFF-5330-	■ ■	608.86	659.86	686.44	755.50	799.46	828.54	630.03	681.03	707.61	776.67	820.63	849.71
36"(914mm)	NMFF-5336-	■ ■	667.28	727.64	763.56	853.66	912.22	950.06	688.45	748.81	784.73	874.83	933.39	971.23
42"(1067mm)	NMFF-5342-	■ ■	725.70	795.42	840.68	951.82	1024.98	1071.58	746.87	816.59	861.85	972.99	1046.15	1092.75
48"(1219mm)	NMFF-5348-	■ ■	784.12	863.20	917.80	1049.98	1137.74	1193.10	805.29	884.37	938.97	1071.15	1158.91	1214.27
60"(1524mm)	NMFF-5360-	■ ■	900.96	998.76	1072.04	1246.30	1363.26	1436.14	922.13	1019.93	1093.21	1267.47	1384.43	1457.31
64"(1626mm) High														
18"(457mm)	NMFF-6418-	■ ■	\$ 614.75	\$ 652.31	\$ 662.63	\$ 699.95	\$ 719.99	\$ 736.39	\$ 635.92	\$ 673.48	\$ 683.80	\$ 721.12	\$ 741.16	\$ 757.56
24"(610mm)	NMFF-6424-	■ ■	673.17	720.09	739.75	798.11	832.75	857.91	694.34	741.26	760.92	819.28	853.92	879.08
30"(762mm)	NMFF-6430-	■ ■	731.59	787.87	816.87	896.27	945.51	979.43	752.76	809.04	838.04	917.44	966.68	1000.60
36"(914mm)	NMFF-6436-	■ ■	790.01	855.65	893.99	994.43	1058.27	1100.95	811.18	876.82	915.16	1015.60	1079.44	1122.12
42"(1067mm)	NMFF-6442-	■ ■	848.43	923.43	971.11	1092.59	1171.03	1222.47	869.60	944.60	992.28	1113.76	1192.20	1243.64
48"(1219mm)	NMFF-6448-	■ ■	906.85	991.21	1048.23	1190.75	1283.79	1343.99	928.02	1012.38	1069.40	1211.92	1304.96	1365.16
60"(1524mm)	NMFF-6460-	■ ■	1023.69	1126.77	1202.47	1387.07	1509.31	1587.03	1044.86	1147.94	1223.64	1408.24	1530.48	1608.20
80"(2032mm) High														
18"(457mm)	NMFF-8018-	■ ■	\$ 839.15	\$ 884.39	\$ 898.23	\$ 950.59	\$ 978.31	\$1001.75	\$ 860.32	\$ 905.56	\$ 919.40	\$ 971.76	\$ 999.48	\$1022.92
24"(610mm)	NMFF-8024-	■ ■	897.57	952.17	975.35	1048.75	1091.07	1123.27	918.74	973.34	996.52	1069.92	1112.24	1144.44
30"(762mm)	NMFF-8030-	■ ■	955.99	1019.95	1052.47	1146.91	1203.83	1244.79	977.16	1041.12	1073.64	1168.08	1225.00	1265.96
36"(914mm)	NMFF-8036-	■ ■	1014.41	1087.73	1129.59	1245.07	1316.59	1366.31	1035.58	1108.90	1150.76	1266.24	1337.76	1387.48
42"(1067mm)	NMFF-8042-	■ ■	1072.83	1155.51	1206.71	1343.23	1429.35	1487.83	1094.00	1176.68	1227.88	1364.40	1450.52	1509.00
48"(1219mm)	NMFF-8048-	■ ■	1131.25	1223.29	1283.83	1441.39	1542.11	1609.35	1152.42	1244.46	1305.00	1462.56	1563.28	1630.52
60"(1524mm)	NMFF-8060-	■ ■	1248.09	1358.85	1438.07	1637.71	1767.63	1852.39	1269.26	1380.02	1459.24	1658.88	1788.80	1873.56


List price shown is with non-powered base raceway.

Foundation Elements — Monolithic Panels


Fabric Surface – Grooved Top Cap



NMFF-GN
(Non-Powered)



NMFF-GA
(Open Base)



NMFF-GP
(3-Circuit Powered)



NOTES:

18" (457mm) wide panels are non-powered only. Specify extended power connectors to continue power through 18" (457mm) panels.

Receptacle ports on the raceway cover measure 2" (51mm) top-to-bottom and 4 3/4" (121mm) side-to-side.

Powered panels with raceway covers ship with receptacle ports in the **base** raceway cover. Non-powered panels ship without receptacle ports in the **base** raceway cover. Powered panels with PDA but without raceway covers require separately specified base raceway covers for power and communication port locations other than the standard powered base raceway cover.

New York City (NYC) electrical applications require field installation of Power Distribution Assemblies (PDA). See Power Specifications on this page for details.

New York Port Authority (NYPA) electrical applications require metal raceway covers. See Power Specifications on this page for details.

Some building codes may restrict the use of panel heights greater than 69" (1753mm). Consult your local code authority to assure that the furniture layout is compliant prior to installation.

Features

- **Non-powered and powered panels** include panel assembly, panel locks, grooved painted top cap, with or without one-piece raceway cover; power distribution assembly/flex connector(s) when power is specified, and attachment hardware.
- **Open base panels** include panel assembly, panel locks, grooved top cap, and attachment hardware.
- Grooved top caps allow attachment of panel attached screens, canopies, Jump Stuff ambient lights, and off-modular components.
- **Tackable, acoustical panel surfaces.**
- Panel surfaces may have the same fabric on both sides or a different fabric on each side.
- Monolithic panel thickness is 3" (76mm).
- Top raceway is 2" (51mm) deep; base raceway is 6 3/4" (171mm) high. See the Power and Cable Management Section for details.
- Powered panels are available for countries that utilize 120 volt 60 hertz electrical systems and U.S. configured plugs and outlets.
- Shipped with unassembled top cap and base raceway cover (if applicable).
- Available on RUSH with non-powered or open base raceway and 3-circuit and 4-circuit powered raceway.

Specification Tips

- Connectors are required to create panel runs and intersections; specify separately.
- Monolithic panels will accept upper structure elements up to 120" (3048mm). See the product application guidelines section for planning rules.
- Flex connectors provided for powered monolithic panels accommodate straight in-line, inside 90°, and inside 120° conditions (if applicable). See price list pages for additional flex connector applications.
- Powered monolithic panels will only accept triplex receptacles; specify separately.
- Grooved top cap eliminates routing of cable in top trough.
- Open base is not available with power or base raceway cover.
- 3-circuit and 4-circuit powered panels can be field retrofitted for beltline power with the Power/Communication Port Kit.
- Use extended power connectors to pass through 18" (457mm) or 24" (610mm) non-powered panel.
- Base raceway is 6 3/4" (171mm) high for all power options.
- Do not mix 3-circuit with 4-circuit components. Do not mix 2+2 and 3+1 components. Components have unique polarity key and color coding.
- 3-circuit and 4-circuit power options include power distribution assembly, flex connector and powered raceway cover.
- New York City (NYC) and New York Port Authority (NYPA) electrical applications require field installation of Power Distribution Assembly (PDA).
- Hardwire option includes powered raceway cover only. Separately specify hardwire electrical kit for base raceway.
- Raceway cover needs to be separately specified for no raceway cover option.

To Order, Specify:

1) Product number, including:

① Base Option:

- N** Non-Powered
- M** Non-Powered, NYPA, add **\$108.68** list
- A** Open Base

3-Circuit: 24"-60" wide

- P** 3-Circuit, add **\$198.64** list
- Y** 3-Circuit – NYC, add **\$177.61** list
- R** 3-Circuit – NYPA, add **\$286.29** list
- E** 3-Circuit – No raceway cover option with PDA, add **\$191.63** list
- C** Hardwire with raceway

4-Circuit: 24"-60" wide

- 2** 4-Circuit – 2+2, add **\$206.83** list
- W** 4-Circuit – 2+2 NYC, add **\$185.80** list
- T** 4-Circuit – 2+2 NYPA, add **\$294.48** list
- H** 4-Circuit – 2+2 no raceway cover option with PDA, add **\$199.82** list
- 4** 4-Circuit – 3+1, add **\$206.83** list
- V** 4-Circuit – 3+1 NYC, add **\$185.80** list
- S** 4-Circuit – 3+1 NYPA, add **\$294.48** list
- D** 4-Circuit – 3+1 no raceway cover option with PDA, add **\$199.82** list

- 2) Fabric/colorway for side one.*
- 3) Fabric/colorway for side two.*
- 4) Trim color for base raceway cover (if applicable).*
- 5) Trim color for top cap.*

***Note:** Upcharge for mixed grade fabric or trim surfaces, refer to the electronic catalog for pricing.

Foundation Elements — Monolithic Panels


Fabric Surface – Grooved Top Cap

			Trim A Fabric Grade					Trim B Fabric Grade							
Width	Number	①	A	B	C	E	F	G	A	B	C	E	F	G	
32"(813mm) High															
18"(457mm)	NMFF-3218-G		\$ 557.40	\$ 579.60	\$ 582.88	\$ 590.12	\$ 594.80	\$ 597.12	\$ 578.57	\$ 600.77	\$ 604.05	\$ 611.29	\$ 615.97	\$ 618.29	
24"(610mm)	NMFF-3224-G	■	615.82	647.38	660.00	688.28	707.56	718.64	636.99	668.55	681.17	709.45	728.73	739.81	
30"(762mm)	NMFF-3230-G	■	674.24	715.16	737.12	786.44	820.32	840.16	695.41	736.33	758.29	807.61	841.49	861.33	
36"(914mm)	NMFF-3236-G	■	732.66	782.94	814.24	884.60	933.08	961.68	753.83	804.11	835.41	905.77	954.25	982.85	
42"(1067mm)	NMFF-3242-G	■	791.08	850.72	891.36	982.76	1045.84	1083.20	812.25	871.89	912.53	1003.93	1067.01	1104.37	
48"(1219mm)	NMFF-3248-G	■	849.50	918.50	968.48	1080.92	1158.60	1204.72	870.67	939.67	989.65	1102.09	1179.77	1225.89	
60"(1524mm)	NMFF-3260-G	■	966.34	1054.06	1122.72	1277.24	1384.12	1447.76	987.51	1075.23	1143.89	1298.41	1405.29	1468.93	
42"(1067mm) High															
18"(457mm)	NMFF-4218-G		\$ 580.80	\$ 607.80	\$ 613.28	\$ 629.92	\$ 639.40	\$ 646.12	\$ 601.97	\$ 628.97	\$ 634.45	\$ 651.09	\$ 660.57	\$ 667.29	
24"(610mm)	NMFF-4224-G	■	639.22	675.58	690.40	728.08	752.16	767.64	660.39	696.75	711.57	749.25	773.33	788.81	
30"(762mm)	NMFF-4230-G	■	697.64	743.36	767.52	826.24	864.92	889.16	718.81	764.53	788.69	847.41	886.09	910.33	
36"(914mm)	NMFF-4236-G	■	756.06	811.14	844.64	924.40	977.68	1010.68	777.23	832.31	865.81	945.57	998.85	1031.85	
42"(1067mm)	NMFF-4242-G	■	814.48	878.92	921.76	1022.56	1090.44	1132.20	835.65	900.09	942.93	1043.73	1111.61	1153.37	
48"(1219mm)	NMFF-4248-G	■	872.90	946.70	998.88	1120.72	1203.20	1253.72	894.07	967.87	1020.05	1141.89	1224.37	1274.89	
60"(1524mm)	NMFF-4260-G	■	989.74	1082.26	1153.12	1317.04	1428.72	1496.76	1010.91	1103.43	1174.29	1338.21	1449.89	1517.93	
48"(1219mm) High															
18"(457mm)	NMFF-4818-G		\$ 594.84	\$ 624.72	\$ 631.52	\$ 653.80	\$ 666.16	\$ 675.52	\$ 616.01	\$ 645.89	\$ 652.69	\$ 674.97	\$ 687.33	\$ 696.69	
24"(610mm)	NMFF-4824-G	■	653.26	692.50	708.64	751.96	778.92	797.04	674.43	713.67	729.81	773.13	800.09	818.21	
30"(762mm)	NMFF-4830-G	■	711.68	760.28	785.76	850.12	891.68	918.56	732.85	781.45	806.93	871.29	912.85	939.73	
36"(914mm)	NMFF-4836-G	■	770.10	828.06	862.88	948.28	1004.44	1040.08	791.27	849.23	884.05	969.45	1025.61	1061.25	
42"(1067mm)	NMFF-4842-G	■	828.52	895.84	940.00	1046.44	1117.20	1161.60	849.69	917.01	961.17	1067.61	1138.37	1182.77	
48"(1219mm)	NMFF-4848-G	■	886.94	963.62	1017.12	1144.60	1229.96	1283.12	908.11	984.79	1038.29	1165.77	1251.13	1304.29	
60"(1524mm)	NMFF-4860-G	■	1003.78	1099.18	1171.36	1340.92	1455.48	1526.16	1024.95	1120.35	1192.53	1362.09	1476.65	1547.33	
53"(1346mm) High															
18"(457mm)	NMFF-5318-G		\$ 606.54	\$ 638.82	\$ 646.72	\$ 673.70	\$ 688.46	\$ 700.02	\$ 627.71	\$ 659.99	\$ 667.89	\$ 694.87	\$ 709.63	\$ 721.19	
24"(610mm)	NMFF-5324-G	■	664.96	706.60	723.84	771.86	801.22	821.54	686.13	727.77	745.01	793.03	822.39	842.71	
30"(762mm)	NMFF-5330-G	■	723.38	774.38	800.96	870.02	913.98	943.06	744.55	795.55	822.13	891.19	935.15	964.23	
36"(914mm)	NMFF-5336-G	■	781.80	842.16	878.08	968.18	1026.74	1064.58	802.97	863.33	899.25	989.35	1047.91	1085.75	
42"(1067mm)	NMFF-5342-G	■	840.22	909.94	955.20	1066.34	1139.50	1186.10	861.39	931.11	976.37	1087.51	1160.67	1207.27	
48"(1219mm)	NMFF-5348-G	■	898.64	977.72	1032.32	1164.50	1252.26	1307.62	919.81	998.89	1053.49	1185.67	1273.43	1328.79	
60"(1524mm)	NMFF-5360-G	■	1015.48	1113.28	1186.56	1360.82	1477.78	1550.66	1036.65	1134.45	1207.73	1381.99	1498.95	1571.83	
64"(1626mm) High															
18"(457mm)	NMFF-6418-G		\$ 729.27	\$ 766.83	\$ 777.15	\$ 814.47	\$ 834.51	\$ 850.91	\$ 750.44	\$ 788.00	\$ 798.32	\$ 835.64	\$ 855.68	\$ 872.08	
24"(610mm)	NMFF-6424-G	■	787.69	834.61	854.27	912.63	947.27	972.43	808.86	855.78	875.44	933.80	968.44	993.60	
30"(762mm)	NMFF-6430-G	■	846.11	902.39	931.39	1010.79	1060.03	1093.95	867.28	923.56	952.56	1031.96	1081.20	1115.12	
36"(914mm)	NMFF-6436-G	■	904.53	970.17	1008.51	1108.95	1172.79	1215.47	925.70	991.34	1029.68	1130.12	1193.96	1236.64	
42"(1067mm)	NMFF-6442-G	■	962.95	1037.95	1085.63	1207.11	1285.55	1336.99	984.12	1059.12	1106.80	1228.28	1306.72	1358.16	
48"(1219mm)	NMFF-6448-G	■	1021.37	1105.73	1162.75	1305.27	1398.31	1458.51	1042.54	1126.90	1183.92	1326.44	1419.48	1479.68	
60"(1524mm)	NMFF-6460-G	■	1138.21	1241.29	1316.99	1501.59	1623.83	1701.55	1159.38	1262.46	1338.16	1522.76	1645.00	1722.72	
80"(2032mm) High															
18"(457mm)	NMFF-8018-G		\$ 953.67	\$ 998.91	\$1012.75	\$1065.11	\$1092.83	\$1116.27	\$ 974.84	\$1020.08	\$1033.92	\$1086.28	\$1114.00	\$1137.44	
24"(610mm)	NMFF-8024-G	■	1012.09	1066.69	1089.87	1163.27	1205.59	1237.79	1033.26	1087.86	1111.04	1184.44	1226.76	1258.96	
30"(762mm)	NMFF-8030-G	■	1070.51	1134.47	1166.99	1261.43	1318.35	1359.31	1091.68	1155.64	1188.16	1282.60	1339.52	1380.48	
36"(914mm)	NMFF-8036-G	■	1128.93	1202.25	1244.11	1359.59	1431.11	1480.83	1150.10	1223.42	1265.28	1380.76	1452.28	1502.00	
42"(1067mm)	NMFF-8042-G	■	1187.35	1270.03	1321.23	1457.75	1543.87	1602.35	1208.52	1291.20	1342.40	1478.92	1565.04	1623.52	
48"(1219mm)	NMFF-8048-G	■	1245.77	1337.81	1398.35	1555.91	1656.63	1723.87	1266.94	1358.98	1419.52	1577.08	1677.80	1745.04	
60"(1524mm)	NMFF-8060-G	■	1362.61	1473.37	1552.59	1752.23	1882.15	1966.91	1383.78	1494.54	1573.76	1773.40	1903.32	1988.08	


List price shown is with non-powered base raceway.

Foundation Elements — Monolithic Panels


Fabric Surface – Wood Top Cap

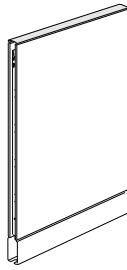

NMFF-WN
(Non-Powered)

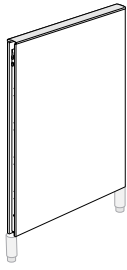

NMFF-WA
(Open Base)

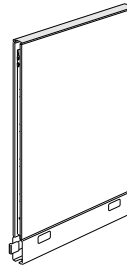

NMFF-WP
(3-Circuit Powered)



NOTES:

18" (457mm) wide panels are non-powered only. Specify extended power connectors to continue power through 18" (457mm) panels.

Receptacle ports on the raceway cover measure 2" (51mm) top-to-bottom and 4 3/4" (121mm) side-to-side.

Powered panels with raceway covers ship with receptacle ports in the **base** raceway cover.

Non-powered panels ship without receptacle ports in the **base** raceway cover. Powered panels with PDA but without raceway covers require separately specified base raceway covers for power and communication port locations other than the standard powered base raceway cover.

New York City (NYC) electrical applications require field installation

of Power Distribution Assemblies (PDA). See Power Specifications on this page for details.

New York Port Authority (NYPA) electrical applications require metal raceway covers. See Power Specifications on this page for details.

Some building codes may restrict the use of panel heights greater than 69" (1753mm). Consult your local code authority to assure that the furniture layout is compliant prior to installation.

Features

- **Non-powered and powered panels** include panel assembly, panel locks, wood top cap, with or without one-piece raceway cover; power distribution assembly/flex connector(s) when power is specified, and attachment hardware.
- **Open base panels** include panel assembly, panel locks, wood top cap, and attachment hardware.
- **Tackable, acoustical panel surfaces.**
- Panel surfaces may have the same fabric on both sides or a different fabric on each side.
- Monolithic panel thickness is 3" (76mm).
- Top raceway is 2" (51mm) deep; base raceway is 6 3/4" (171mm) high. See the Power and Cable Management Section for details.
- Powered panels are available for countries that utilize 120 volt 60 hertz electrical systems and U.S. configured plugs and outlets.
- Shipped with unassembled top cap and base raceway cover (if applicable).

Specification Tips

- Connectors are required to create panel runs and intersections; specify separately.
- Monolithic panels will accept upper structure elements up to 120" (3048mm). See the Product Application Guidelines Section for planning rules.
- Flex connectors provided for powered monolithic panels accommodate straight in-line, inside 90°, and inside 120° conditions (if applicable). See price list pages for additional flex connector applications.
- Powered monolithic panels will only accept triplex receptacles; specify separately.
- Open base is not available with power or base raceway cover.
- 3-circuit and 4-circuit powered panels can be field retrofitted for beltline power with the Power/Communication Port Kit.
- Use extended power connectors to pass through 18" (457mm) or 24" (610mm) non-powered panel.
- Base raceway is 6 3/4" (171mm) high for all power options.
- Do not mix 3-circuit with 4-circuit components. Do not mix 2+2 and 3+1 components. Components have unique polarity key and color coding.
- 3-circuit and 4-circuit power options include power distribution assembly, flex connector and powered raceway cover.
- New York City (NYC) and New York Port Authority (NYPA) electrical applications require field installation of Power Distribution Assembly (PDA).
- Hardwire option includes powered raceway cover only. Separately specify hardwire electrical kit for base raceway.
- Raceway cover needs to be separately specified for no raceway cover option.

To Order, Specify:

1) Product number, including:

1 Base Option:

N Non-Powered

M Non-Powered, NYPA, add **\$108.68** list

A Open Base

3-Circuit: 24"-60" wide

P 3-Circuit, add **\$198.64** list

Y 3-Circuit – NYC, add **\$177.61** list

R 3-Circuit – NYPA, add **\$286.29** list

E 3-Circuit – No raceway cover option with PDA, add **\$191.63** list

C Hardwire with raceway

4-Circuit: 24"-60" wide

2 4-Circuit – 2+2, add **\$206.83** list

W 4-Circuit – 2+2 NYC, add **\$185.80** list

T 4-Circuit – 2+2 NYPA, add **\$294.48** list

H 4-Circuit – 2+2 no raceway cover option with PDA, add **\$199.82** list

4 4-Circuit – 3+1, add **\$206.83** list

V 4-Circuit – 3+1 NYC, add **\$185.80** list

S 4-Circuit – 3+1 NYPA, add **\$294.48** list

D 4-Circuit – 3+1 no raceway cover option with PDA, add **\$199.82** list

2) Fabric/colorway for side one.*

3) Fabric/colorway for side two.*

4) Trim color for base raceway cover (if applicable).*

5) Wood finish for top cap.

***Note:** Upcharge for mixed grade fabric or trim surfaces, refer to the electronic catalog for pricing.

Foundation Elements — Monolithic Panels











































Fabric Surface – Wood Top Cap

		Wood Group A – Trim A							Wood Group A – Trim B						
Width	Number	①	Fabric Grade		C	E	F	G	Fabric Grade		C	E	F	G	
			A	B					A	B					
32″(813mm) High															
18″(457mm)	NMFF-3218-W		\$ 662.56	\$ 684.76	\$ 688.04	\$ 695.28	\$ 699.96	\$ 702.28	\$ 676.99	\$ 699.19	\$ 702.47	\$ 709.71	\$ 714.39	\$ 716.71	
24″(610mm)	NMFF-3224-W		749.03	780.59	793.21	821.49	840.77	851.85	763.46	795.02	807.64	835.92	855.20	866.28	
30″(762mm)	NMFF-3230-W		835.50	876.42	898.38	947.70	981.58	1001.42	849.93	890.85	912.81	962.13	996.01	1015.85	
36″(914mm)	NMFF-3236-W		921.97	972.25	1003.55	1073.91	1122.39	1150.99	936.40	986.68	1017.98	1088.34	1136.82	1165.42	
42″(1067mm)	NMFF-3242-W		1008.44	1068.08	1108.72	1200.12	1263.20	1300.56	1022.87	1082.51	1123.15	1214.55	1277.63	1314.99	
48″(1219mm)	NMFF-3248-W		1094.91	1163.91	1213.89	1326.33	1404.01	1450.13	1109.34	1178.34	1228.32	1340.76	1418.44	1464.56	
60″(1524mm)	NMFF-3260-W		1267.85	1355.57	1424.23	1578.75	1685.63	1749.27	1282.28	1370.00	1438.66	1593.18	1700.06	1763.70	
42″(1067mm) High															
18″(457mm)	NMFF-4218-W		\$ 685.96	\$ 712.96	\$ 718.44	\$ 735.08	\$ 744.56	\$ 751.28	\$ 700.39	\$ 727.39	\$ 732.87	\$ 749.51	\$ 758.99	\$ 765.71	
24″(610mm)	NMFF-4224-W		772.43	808.79	823.61	861.29	885.37	900.85	786.86	823.22	838.04	875.72	899.80	915.28	
30″(762mm)	NMFF-4230-W		858.90	904.62	928.78	987.50	1026.18	1050.42	873.33	919.05	943.21	1001.93	1040.61	1064.85	
36″(914mm)	NMFF-4236-W		945.37	1000.45	1033.95	1113.71	1166.99	1199.99	959.80	1014.88	1048.38	1128.14	1181.42	1214.42	
42″(1067mm)	NMFF-4242-W		1031.84	1096.28	1139.12	1239.92	1307.80	1349.56	1046.27	1110.71	1153.55	1254.35	1322.23	1363.99	
48″(1219mm)	NMFF-4248-W		1118.31	1192.11	1244.29	1366.13	1448.61	1499.13	1132.74	1206.54	1258.72	1380.56	1463.04	1513.56	
60″(1524mm)	NMFF-4260-W		1291.25	1383.77	1454.63	1618.55	1730.23	1798.27	1305.68	1398.20	1469.06	1632.98	1744.66	1812.70	
48″(1219mm) High															
18″(457mm)	NMFF-4818-W		\$ 700.00	\$ 729.88	\$ 736.68	\$ 758.96	\$ 771.32	\$ 780.68	\$ 714.43	\$ 744.31	\$ 751.11	\$ 773.39	\$ 785.75	\$ 795.11	
24″(610mm)	NMFF-4824-W		786.47	825.71	841.85	885.17	912.13	930.25	800.90	840.14	856.28	899.60	926.56	944.68	
30″(762mm)	NMFF-4830-W		872.94	921.54	947.02	1011.38	1052.94	1079.82	887.37	935.97	961.45	1025.81	1067.37	1094.25	
36″(914mm)	NMFF-4836-W		959.41	1017.37	1052.19	1137.59	1193.75	1229.39	973.84	1031.80	1066.62	1152.02	1208.18	1243.82	
42″(1067mm)	NMFF-4842-W		1045.88	1113.20	1157.36	1263.80	1334.56	1378.96	1060.31	1127.63	1171.79	1278.23	1348.99	1393.39	
48″(1219mm)	NMFF-4848-W		1132.35	1209.03	1262.53	1390.01	1475.37	1528.53	1146.78	1223.46	1276.96	1404.44	1489.80	1542.96	
60″(1524mm)	NMFF-4860-W		1305.29	1400.69	1472.87	1642.43	1756.99	1827.67	1319.72	1415.12	1487.30	1656.86	1771.42	1842.10	
53″(1346mm) High															
18″(457mm)	NMFF-5318-W		\$ 711.70	\$ 743.98	\$ 751.88	\$ 778.86	\$ 793.62	\$ 805.18	\$ 726.13	\$ 758.41	\$ 766.31	\$ 793.29	\$ 808.05	\$ 819.61	
24″(610mm)	NMFF-5324-W		798.17	839.81	857.05	905.07	934.43	954.75	812.60	854.24	871.48	919.50	948.86	969.18	
30″(762mm)	NMFF-5330-W		884.64	935.64	962.22	1031.28	1075.24	1104.32	899.07	950.07	976.65	1045.71	1089.67	1118.75	
36″(914mm)	NMFF-5336-W		971.11	1031.47	1067.39	1157.49	1216.05	1253.89	985.54	1045.90	1081.82	1171.92	1230.48	1268.32	
42″(1067mm)	NMFF-5342-W		1057.58	1127.30	1172.56	1283.70	1356.86	1403.46	1072.01	1141.73	1186.99	1298.13	1371.29	1417.89	
48″(1219mm)	NMFF-5348-W		1144.05	1223.13	1277.73	1409.91	1497.67	1553.03	1158.48	1237.56	1292.16	1424.34	1512.10	1567.46	
60″(1524mm)	NMFF-5360-W		1316.99	1414.79	1488.07	1662.33	1779.29	1852.17	1331.42	1429.22	1502.50	1676.76	1793.72	1866.60	
64″(1626mm) High															
18″(457mm)	NMFF-6418-W		\$ 834.43	\$ 871.99	\$ 882.31	\$ 919.63	\$ 939.67	\$ 956.07	\$ 848.86	\$ 886.42	\$ 896.74	\$ 934.06	\$ 954.10	\$ 970.50	
24″(610mm)	NMFF-6424-W		920.90	967.82	987.48	1045.84	1080.48	1105.64	935.33	982.25	1001.91	1060.27	1094.91	1120.07	
30″(762mm)	NMFF-6430-W		1007.37	1063.65	1092.65	1172.05	1221.29	1255.21	1021.80	1078.08	1107.08	1186.48	1235.72	1269.64	
36″(914mm)	NMFF-6436-W		1093.84	1159.48	1197.82	1298.26	1362.10	1404.78	1108.27	1173.91	1212.25	1312.69	1376.53	1419.21	
42″(1067mm)	NMFF-6442-W		1180.31	1255.31	1302.99	1424.47	1502.91	1554.35	1194.74	1269.74	1317.42	1438.90	1517.34	1568.78	
48″(1219mm)	NMFF-6448-W		1266.78	1351.14	1408.16	1550.68	1643.72	1703.92	1281.21	1365.57	1422.59	1565.11	1658.15	1718.35	
60″(1524mm)	NMFF-6460-W		1439.72	1542.80	1618.50	1803.10	1925.34	2003.06	1454.15	1557.23	1632.93	1817.53	1939.77	2017.49	
80″(2032mm) High															
18″(457mm)	NMFF-8018-W		\$1058.83	\$1104.07	\$1117.91	\$1170.27	\$1197.99	\$1221.43	\$1073.26	\$1118.50	\$1132.34	\$1184.70	\$1212.42	\$1235.86	
24″(610mm)	NMFF-8024-W		1145.30	1199.90	1223.08	1296.48	1338.80	1371.00	1159.73	1214.33	1237.51	1310.91	1353.23	1385.43	
30″(762mm)	NMFF-8030-W		1231.77	1295.73	1328.25	1422.69	1479.61	1520.57	1246.20	1310.16	1342.68	1437.12	1494.04	1535.00	
36″(914mm)	NMFF-8036-W		1318.24	1391.56	1433.42	1548.90	1620.42	1670.14	1332.67	1405.99	1447.85	1563.33	1634.85	1684.57	
42″(1067mm)	NMFF-8042-W		1404.71	1487.39	1538.59	1675.11	1761.23	1819.71	1419.14	1501.82	1553.02	1689.54	1775.66	1834.14	
48″(1219mm)	NMFF-8048-W		1491.18	1583.22	1643.76	1801.32	1902.04	1969.28	1505.61	1597.65	1658.19	1815.75	1916.47	1983.71	
60″(1524mm)	NMFF-8060-W		1664.12	1774.88	1854.10	2053.74	2183.66	2268.42	1678.55	1789.31	1868.53	2068.17	2198.09	2282.85	

List price shown is with non-powered base raceway.

Foundation Elements — Monolithic Panels


Fabric Surface – Wood Top Cap

			Wood Group B – Trim A					Wood Group B – Trim B						
Width	Number	①	Fabric Grade					Fabric Grade						
			A	B	C	E	F	G	A	B	C	E	F	G
32”(813mm) High														
18”(457mm)	NMFF-3218-W		\$ 711.64	\$ 733.84	\$ 737.12	\$ 744.36	\$ 749.04	\$ 751.36	\$ 726.07	\$ 748.27	\$ 751.55	\$ 758.79	\$ 763.47	\$ 765.79
24”(610mm)	NMFF-3224-W		802.78	834.34	846.96	875.24	894.52	905.60	817.21	848.77	861.39	889.67	908.95	920.03
30”(762mm)	NMFF-3230-W		893.92	934.84	956.80	1006.12	1040.00	1059.84	908.35	949.27	971.23	1020.55	1054.43	1074.27
36”(914mm)	NMFF-3236-W		985.06	1035.34	1066.64	1137.00	1185.48	1214.08	999.49	1049.77	1081.07	1151.43	1199.91	1228.51
42”(1067mm)	NMFF-3242-W		1076.20	1135.84	1176.48	1267.88	1330.96	1368.32	1090.63	1150.27	1190.91	1282.31	1345.39	1382.75
48”(1219mm)	NMFF-3248-W		1167.34	1236.34	1286.32	1398.76	1476.44	1522.56	1181.77	1250.77	1300.75	1413.19	1490.87	1536.99
60”(1524mm)	NMFF-3260-W		1349.62	1437.34	1506.00	1660.52	1767.40	1831.04	1364.05	1451.77	1520.43	1674.95	1781.83	1845.47
42”(1067mm) High														
18”(457mm)	NMFF-4218-W		\$ 735.04	\$ 762.04	\$ 767.52	\$ 784.16	\$ 793.64	\$ 800.36	\$ 749.47	\$ 776.47	\$ 781.95	\$ 798.59	\$ 808.07	\$ 814.79
24”(610mm)	NMFF-4224-W		826.18	862.54	877.36	915.04	939.12	954.60	840.61	876.97	891.79	929.47	953.55	969.03
30”(762mm)	NMFF-4230-W		917.32	963.04	987.20	1045.92	1084.60	1108.84	931.75	977.47	1001.63	1060.35	1099.03	1123.27
36”(914mm)	NMFF-4236-W		1008.46	1063.54	1097.04	1176.80	1230.08	1263.08	1022.89	1077.97	1111.47	1191.23	1244.51	1277.51
42”(1067mm)	NMFF-4242-W		1099.60	1164.04	1206.88	1307.68	1375.56	1417.32	1114.03	1178.47	1221.31	1322.11	1389.99	1431.75
48”(1219mm)	NMFF-4248-W		1190.74	1264.54	1316.72	1438.56	1521.04	1571.56	1205.17	1278.97	1331.15	1452.99	1535.47	1585.99
60”(1524mm)	NMFF-4260-W		1373.02	1465.54	1536.40	1700.32	1812.00	1880.04	1387.45	1479.97	1550.83	1714.75	1826.43	1894.47
48”(1219mm) High														
18”(457mm)	NMFF-4818-W		\$ 749.08	\$ 778.96	\$ 785.76	\$ 808.04	\$ 820.40	\$ 829.76	\$ 763.51	\$ 793.39	\$ 800.19	\$ 822.47	\$ 834.83	\$ 844.19
24”(610mm)	NMFF-4824-W		840.22	879.46	895.60	938.92	965.88	984.00	854.65	893.89	910.03	953.35	980.31	998.43
30”(762mm)	NMFF-4830-W		931.36	979.96	1005.44	1069.80	1111.36	1138.24	945.79	994.39	1019.87	1084.23	1125.79	1152.67
36”(914mm)	NMFF-4836-W		1022.50	1080.46	1115.28	1200.68	1256.84	1292.48	1036.93	1094.89	1129.71	1215.11	1271.27	1306.91
42”(1067mm)	NMFF-4842-W		1113.64	1180.96	1225.12	1331.56	1402.32	1446.72	1128.07	1195.39	1239.55	1345.99	1416.75	1461.15
48”(1219mm)	NMFF-4848-W		1204.78	1281.46	1334.96	1462.44	1547.80	1600.96	1219.21	1295.89	1349.39	1476.87	1562.23	1615.39
60”(1524mm)	NMFF-4860-W		1387.06	1482.46	1554.64	1724.20	1838.76	1909.44	1401.49	1496.89	1569.07	1738.63	1853.19	1923.87
53”(1346mm) High														
18”(457mm)	NMFF-5318-W		\$ 760.78	\$ 793.06	\$ 800.96	\$ 827.94	\$ 842.70	\$ 854.26	\$ 775.21	\$ 807.49	\$ 815.39	\$ 842.37	\$ 857.13	\$ 868.69
24”(610mm)	NMFF-5324-W		851.92	893.56	910.80	958.82	988.18	1008.50	866.35	907.99	925.23	973.25	1002.61	1022.93
30”(762mm)	NMFF-5330-W		943.06	994.06	1020.64	1089.70	1133.66	1162.74	957.49	1008.49	1035.07	1104.13	1148.09	1177.17
36”(914mm)	NMFF-5336-W		1034.20	1094.56	1130.48	1220.58	1279.14	1316.98	1048.63	1108.99	1144.91	1235.01	1293.57	1331.41
42”(1067mm)	NMFF-5342-W		1125.34	1195.06	1240.32	1351.46	1424.62	1471.22	1139.77	1209.49	1254.75	1365.89	1439.05	1485.65
48”(1219mm)	NMFF-5348-W		1216.48	1295.56	1350.16	1482.34	1570.10	1625.46	1230.91	1309.99	1364.59	1496.77	1584.53	1639.89
60”(1524mm)	NMFF-5360-W		1398.76	1496.56	1569.84	1744.10	1861.06	1933.94	1413.19	1510.99	1584.27	1758.53	1875.49	1948.37
64”(1626mm) High														
18”(457mm)	NMFF-6418-W		\$ 883.51	\$ 921.07	\$ 931.39	\$ 968.71	\$ 988.75	\$1005.15	\$ 897.94	\$ 935.50	\$ 945.82	\$ 983.14	\$1003.18	\$1019.58
24”(610mm)	NMFF-6424-W		974.65	1021.57	1041.23	1099.59	1134.23	1159.39	989.08	1036.00	1055.66	1114.02	1148.66	1173.82
30”(762mm)	NMFF-6430-W		1065.79	1122.07	1151.07	1230.47	1279.71	1313.63	1080.22	1136.50	1165.50	1244.90	1294.14	1328.06
36”(914mm)	NMFF-6436-W		1156.93	1222.57	1260.91	1361.35	1425.19	1467.87	1171.36	1237.00	1275.34	1375.78	1439.62	1482.30
42”(1067mm)	NMFF-6442-W		1248.07	1323.07	1370.75	1492.23	1570.67	1622.11	1262.50	1337.50	1385.18	1506.66	1585.10	1636.54
48”(1219mm)	NMFF-6448-W		1339.21	1423.57	1480.59	1623.11	1716.15	1776.35	1353.64	1438.00	1495.02	1637.54	1730.58	1790.78
60”(1524mm)	NMFF-6460-W		1521.49	1624.57	1700.27	1884.87	2007.11	2084.83	1535.92	1639.00	1714.70	1899.30	2021.54	2099.26
80”(2032mm) High														
18”(457mm)	NMFF-8018-W		\$1107.91	\$1153.15	\$1166.99	\$1219.35	\$1247.07	\$1270.51	\$1122.34	\$1167.58	\$1181.42	\$1233.78	\$1261.50	\$1284.94
24”(610mm)	NMFF-8024-W		1199.05	1253.65	1276.83	1350.23	1392.55	1424.75	1213.48	1268.08	1291.26	1364.66	1406.98	1439.18
30”(762mm)	NMFF-8030-W		1290.19	1354.15	1386.67	1481.11	1538.03	1578.99	1304.62	1368.58	1401.10	1495.54	1552.46	1593.42
36”(914mm)	NMFF-8036-W		1381.33	1454.65	1496.51	1611.99	1683.51	1733.23	1395.76	1469.08	1510.94	1626.42	1697.94	1747.66
42”(1067mm)	NMFF-8042-W		1472.47	1555.15	1606.35	1742.87	1828.99	1887.47	1486.90	1569.58	1620.78	1757.30	1843.42	1901.90
48”(1219mm)	NMFF-8048-W		1563.61	1655.65	1716.19	1873.75	1974.47	2041.71	1578.04	1670.08	1730.62	1888.18	1988.90	2056.14
60”(1524mm)	NMFF-8060-W		1745.89	1856.65	1935.87	2135.51	2265.43	2350.19	1760.32	1871.08	1950.30	2149.94	2279.86	2364.62

List price shown is with non-powered base raceway.

Monolithic Pad Elements

Monolithic Single Pad



NJF

Panel Configuration Height	Height	Width	Number	Fabric Grade		C	E	F	G
				A	B				
42"(1067mm)	35"(889mm)	18"(457mm)	NJF-4218	\$125.95	\$141.00	\$146.82	\$161.21	\$167.55	\$172.49
		24"(610mm)	NJF-4224	140.84	158.13	166.47	186.22	196.09	203.46
		30"(762mm)	NJF-4230	155.73	175.26	186.12	211.23	224.63	234.43
		36"(914mm)	NJF-4236	170.62	192.39	205.77	236.24	253.17	265.40
		42"(1067mm)	NJF-4242	194.67	218.68	234.58	270.41	290.87	305.53
		48"(1219mm)	NJF-4248	211.85	238.10	256.52	297.71	321.70	338.79
		60"(1524mm)	NJF-4260	246.21	276.94	300.40	352.31	383.36	405.31
48"(1219mm)	41"(1041mm)	18"(457mm)	NJF-4818	\$139.70	\$162.77	\$169.72	\$186.75	\$194.70	\$200.89
		24"(610mm)	NJF-4824	154.59	179.90	189.37	211.76	223.24	231.86
		30"(762mm)	NJF-4830	169.48	197.03	209.02	236.77	251.78	262.83
		36"(914mm)	NJF-4836	200.37	230.16	244.67	277.78	296.32	309.80
		42"(1067mm)	NJF-4842	224.42	256.45	273.48	311.95	334.02	349.93
		48"(1219mm)	NJF-4848	241.60	275.87	295.42	339.25	364.85	383.19
		60"(1524mm)	NJF-4860	275.96	314.71	339.30	393.85	426.51	449.71
58"(1473mm)	51"(1295mm)	18"(457mm)	NJF-5818	\$176.34	\$207.14	\$216.11	\$269.43	\$296.04	\$316.78
		24"(610mm)	NJF-5824	191.23	224.27	235.76	294.44	324.58	347.75
		30"(762mm)	NJF-5830	206.12	241.40	255.41	319.45	353.12	378.72
		36"(914mm)	NJF-5836	247.01	284.53	301.06	370.46	407.66	435.69
		42"(1067mm)	NJF-5842	271.06	310.82	329.87	404.63	445.36	475.82
		48"(1219mm)	NJF-5848	288.24	330.24	351.81	431.93	476.19	509.08
		60"(1524mm)	NJF-5860	322.60	369.08	395.69	486.53	537.85	575.60
64"(1626mm)	57"(1448mm)	18"(457mm)	NJF-6418	\$204.97	\$225.75	\$244.06	\$288.89	\$313.22	\$340.37
		24"(610mm)	NJF-6424	219.86	242.88	263.71	313.90	341.76	371.34
		30"(762mm)	NJF-6430	234.75	260.01	283.36	338.91	370.30	402.31
		36"(914mm)	NJF-6436	281.64	309.14	335.01	395.92	430.84	465.28
		42"(1067mm)	NJF-6442	305.69	335.43	363.82	430.09	468.54	505.41
		48"(1219mm)	NJF-6448	322.87	354.85	385.76	457.39	499.37	538.67
		60"(1524mm)	NJF-6460	357.23	393.69	429.64	511.99	561.03	605.19

Features

- Includes one fabric tackable pad.
- No power or communications access; cables can be routed horizontally or vertically behind the Monolithic Single Pad.
- Pads are field-removable for access to internal cabling or for pad replacement.

To Order, Specify:

- 1) Product number.
- 2) Fabric/colorway.


Specification Tips

- Monolithic Single Pads must be used at the bottom of a panel configuration, only one Monolithic Single Pad can be used per panel side.
- Can be used in combination with 10"(254mm) and 16"(406mm) stack pads and stack kits.
- Panel configuration can be the same or different from side one to side two.
- When specifying a Monolithic Single Pad application, the following components are required for a panel configuration: matching width Super Base panel without pads, crossbar(s) with pad attachment brackets at each stack level (42" and 48" heights require one crossbar, 64" height requires two crossbars) and panel connectors. Reference current panel connector guidelines.
- Panel connectors can be full-height or a combination of full-height with extended connectors. Recommended for use with full-height panel connectors. Reference current panel connector guidelines.
- Maximum height of a panel configuration should not exceed 120"(3048mm).
- Monolithic Single Pad can be field ported for power and communications through use of Power and Communication Bezel and separately specified power kits.
- Not for use with off-modular applications.


NOTE: For 58"(1473mm) monolithic conditions, the 58"(1473mm) high monolithic single pad must be specified.

Foundation Elements — Monolithic Panels

Glazed – Standard or Wood Top Cap



NMG-SN
(Non-Powered)
NMG-WN



NMG-SA
(Open Base)



NMG-SP
(3-Circuit Powered)
NMG-WP



NOTES:

18" (457mm) wide panels are non-powered only. Specify extended power connectors to continue power through 18" (457mm) panels.

Receptacle ports on the raceway cover measure 2" (51mm) top-to-bottom and 4 3/4" (121mm) side-to-side.

Powered panels with raceway covers ship with receptacle ports in the **base** raceway cover. Non-powered panels ship without receptacle ports in the **base** raceway cover. Powered panels with PDA but without raceway covers require separately specified base raceway covers for power and communication port locations other than the standard powered base raceway cover.

New York City (NYC) electrical applications require field installation of Power Distribution Assemblies (PDA). See Power Specifications on this page for details.

New York Port Authority (NYPA) electrical applications require metal raceway covers. See Power Specifications on this page for details.

Some building codes may restrict the use of panel heights greater than 69" (1753mm). Consult your local code authority to assure that the furniture layout is compliant prior to installation.

Features

- **Non-powered and powered double paned panels** include panel assembly, panel locks, standard or wood top cap, with or without one-piece raceway cover; power distribution assembly/flex connector(s) when power is specified.
- **Open base panels** include panel assembly, panel locks, top cap, and attachment hardware.
- Top raceway is 1" (25mm) deep; base raceway is 6 3/4" (171mm) high. See the Power and Cable Management Section for details.
- Powered panels are available for countries that utilize 120 volt 60 hertz electrical systems and U.S. configured plugs and outlets.
- Panel thickness is 3" (76mm).
- Shipped with assembled glazed surfaces and unassembled top cap and base raceway cover (if applicable).
- Available on RUSH with non-powered or open base raceway and 3-circuit and 4-circuit powered raceway.

Specification Tips

- Connectors are required to create panel runs and intersections; specify separately.
- Monolithic panels will accept upper structure elements up to 120" (3048mm). See the Product Application Guidelines Section for planning rules.
- Flex connectors provided for powered monolithic panels accommodate straight in-line, inside 90°, and inside 120° conditions (if applicable). See price list pages for additional flex connector applications.
- Powered monolithic panels will only accept triplex receptacles; specify separately.
- Open base is not available with power or base raceway cover.
- Glazed panels are not available with grooved top cap.
- Cannot be retrofitted with grooved top cap.
- Use extended power connectors to pass through 18" (457mm) or 24" (610mm) non-powered panel.
- Base raceway is 6 3/4" (171mm) high for all power options.
- Do not mix 3-circuit with 4-circuit components. Do not mix 2+2 and 3+1 components. Components have unique polarity key and color coding.
- 3-circuit and 4-circuit power options include power distribution assembly, flex connector and powered raceway cover.
- New York City (NYC) and New York Port Authority (NYPA) electrical applications require field installation of Power Distribution Assembly (PDA).
- Hardwire option includes powered raceway cover only. Separately specify hardwire electrical kit for base raceway.

To Order, Specify:

Standard Top Cap Panels

- 1) Product number, including:

1 Base Option:

- N** Non-Powered
- M** Non-Powered, NYPA, add **\$108.68** list
- A** Open Base

3-Circuit: 24"-60" wide

- P** 3-Circuit, add **\$198.64** list
- Y** 3-Circuit – NYC, add **\$177.61** list
- R** 3-Circuit – NYPA, add **\$286.29** list
- E** 3-Circuit – No raceway cover option with PDA, add **\$191.63** list
- C** Hardwire with raceway

To Order, Specify (cont'd):

4-Circuit: 24"-60" wide

- 2** 4-Circuit – 2+2, add **\$206.83** list
- W** 4-Circuit – 2+2 NYC, add **\$185.80** list
- T** 4-Circuit – 2+2 NYPA, add **\$294.48** list
- H** 4-Circuit – 2+2 no raceway cover option with PDA, add **\$199.82** list
- 4** 4-Circuit – 3+1, add **\$206.83** list
- V** 4-Circuit – 3+1 NYC, add **\$185.80** list
- S** 4-Circuit – 3+1 NYPA, add **\$294.48** list
- D** 4-Circuit – 3+1 no raceway cover option with PDA, add **\$199.82** list

- 2) Glazing.

- 3) Trim color for frame.*

- 4) Trim color for base raceway (if applicable).*

- 5) Trim color for top cap.*

Wood Top Cap Panels

- 1) Product number, including:

1 Base Option:

- N** Non-Powered
- M** Non-Powered, NYPA, add **\$108.68** list
- A** Open Base

3-Circuit: 24"-60" wide

- P** 3-Circuit, add **\$198.64** list
- Y** 3-Circuit – NYC, add **\$177.61** list
- R** 3-Circuit – NYPA, add **\$286.29** list
- E** 3-Circuit – No raceway cover option with PDA, add **\$191.63** list
- C** Hardwire with raceway

4-Circuit: 24"-60" wide

- 2** 4-Circuit – 2+2, add **\$206.83** list
- W** 4-Circuit – 2+2 NYC, add **\$185.80** list
- T** 4-Circuit – 2+2 NYPA, add **\$294.48** list
- H** 4-Circuit – 2+2 no raceway cover option with PDA, add **\$199.82** list
- 4** 4-Circuit – 3+1, add **\$206.83** list
- V** 4-Circuit – 3+1 NYC, add **\$185.80** list
- S** 4-Circuit – 3+1 NYPA, add **\$294.48** list
- D** 4-Circuit – 3+1 no raceway cover option with PDA, add **\$199.82** list

- 2) Glazing.

- 3) Trim color for frame.*







- 4) Trim color for base raceway (if applicable).*

- 5) Wood finish for top cap.

*Note: Upcharge for mixed grade trim surfaces, refer to the electronic catalog for pricing.

Foundation Elements — Monolithic Panels

Glazed – Standard or Wood Top Cap


Height	Width	Number ①	Clear Trim A	Trim B	Frosted Acrylic Trim A	Trim B
Standard — Painted Top Cap						
64"(1626mm)	24"(610mm)	NMG-6424-S 	\$1057.53	\$1109.08	\$1367.20 (M)	\$1418.75 (M)
80"(2032mm)	24"(610mm)	NMG-8024-S 	1262.03	1315.02	1571.70 (M)	1624.69 (M)
Wood Top Cap — Wood Group A						
64"(1626mm)	24"(610mm)	NMG-6424-W 	\$1301.75	\$1346.56	\$1611.42 (M)	\$1656.23 (M)
80"(2032mm)	24"(610mm)	NMG-8024-W 	1506.25	1559.24	1815.92 (M)	1868.91 (M)
Wood Top Cap — Wood Group B						
64"(1626mm)	24"(610mm)	NMG-6424-W 	\$1344.99	\$1389.80	\$1654.66 (M)	\$1699.47 (M)
80"(2032mm)	24"(610mm)	NMG-8024-W 	1549.49	1602.48	1859.16 (M)	1912.15 (M)

List price shown is with non-powered base raceway.

(M) Product marked with this symbol available as GSA open market.

Panel Accessories

	Nominal Height	Nominal Width	Number	① ② ③			Clear Glass		Frosted Glass	
							Trim A	Trim B	Trim A	Trim B
Sliding Door	64"(1626mm)	36"(914mm)	VUZF-6436-			N	\$2974.34	\$2990.39	\$3317.05	\$3333.10
		42"(1067mm)	VUZF-6442-			N	3196.02	3213.21	3693.58	3710.77
	80"(2032mm)	36"(914mm)	VUZF-8036-			N	\$3144.90	\$3197.59	\$3598.57	\$3651.26
		42"(1067mm)	VUZF-8042-			N	3366.58	3420.41	3975.10	4028.93



VUZF
(Left hand door)

Features

- Includes sliding door with threshold track and optional lock.
- Available with clear glass or frosted acrylic door insert.
- Full height vertical recessed door handle.
- Sliding Door adjustable wheels allow 1 1/4"(32mm) height adjustment.
- Optional door lock is available; locks with key outside and lever inside. Not field retrofittable.
- Lock plug standard in black.
- Locking mechanism locks the door into the track.
- Right-handed door slides open to right.
- Left-handed door slides open to left.

Specification Tips

- Handedness cannot be changed in the field.
- Sliding Door mounts outside of the workstation.
- Threshold track is included and must be used with the Sliding Door.
- Sliding Door can be attached to panel of same height or taller. Cannot be attached to panel lower than sliding door.
- Sliding Door Filler Post is required in certain applications and ordered separately. Refer to Specification Guide.
- Sliding Door extends 31 3/8"(797mm) for the 36"(914mm)-wide sliding door and 37 3/8"(949mm) for the 42"(1067mm)-wide sliding door.

To Order, Specify:

- 1) Product number, including:

① Insert Option:

- ☐ G Clear (SG-1C)
☐ X Frosted (SG-1F)

② Handedness Option:


- ☐ R Right
☐ L Left

③ Locking Option:

- ☐ N Non-Locking
☐ L Locking, add \$333.53 list

- 2) Trim color.

Filler Post — Sliding Door



VNZP

Nominal Height	Number	①	Trim	
			A	B
64"(1626mm)	VNZP-6400-P		\$453.22	\$474.58
80"(2032mm)	VNZP-8000-P		516.50	537.86

Feature

- Includes painted filler post with top cap and attachment hardware.

Specification Tips

- Filler post is required for certain Sliding Door applications. Refer to Specification Guide.
- Specify filler post to match panel height in all applications.
- Panel connector not included and must be specified separately.

To Order, Specify:

- 1) Product number, including:

① Top Cap Option:

- ☐ S Standard
☐ G Grooved
☐ W Wood, add \$124.32 list


- 2) Trim color for filler post.

- 3) Trim color for top cap.


Foundation Elements — Monolithic Panels

Single Door and Frame — Standard or Wood Top Cap


Frame Height	Frame Width	Painted Top Cap Number	Laminate A		Laminate B		Wood Top Cap Number	Wood Group A		Wood Group B	
			Trim A	Trim B	Trim A	Trim B		Trim A	Trim B	Trim A	Trim B
Laminate Door											
80"(2032mm)	36"(914mm)	NDLS-8036-K	\$2250.61	\$2304.90	\$2430.57	\$2484.86	NDLW-8036-K	\$2553.26	\$2598.56	\$2786.97	\$2832.27
	42"(1067mm)	NDLS-8042-K	2764.77	2821.31	2985.62	3042.16	NDLW-8042-K	3163.24	3208.54	3455.37	3500.67
	36"(914mm)	NDLS-8036-A	2464.45	2518.74	2644.41	2698.70	NDLW-8036-A	2767.10	2812.40	3000.81	3046.11
	42"(1067mm)	NDLS-8042-A	2978.61	3035.15	3199.46	3256.00	NDLW-8042-A	3377.08	3422.38	3669.21	3714.51
Wood Door											
80"(2032mm)	36"(914mm)	NDWS-8036-K	\$2820.86	\$2875.15	\$2922.52	\$2976.81	NDWW-8036-K	\$3123.51	\$3168.81	\$3278.92	\$3324.22
	42"(1067mm)	NDWS-8042-K	3456.55	3513.09	3558.21	3614.75	NDWW-8042-K	3855.02	3900.32	4027.96	4073.26
	36"(914mm)	NDWS-8036-A	3034.70	3088.99	3136.36	3190.65	NDWW-8036-A	3337.35	3382.65	3492.76	3538.06
	42"(1067mm)	NDWS-8042-A	3670.39	3726.93	3772.05	3828.59	NDWW-8042-A	4068.86	4114.16	4241.80	4287.10

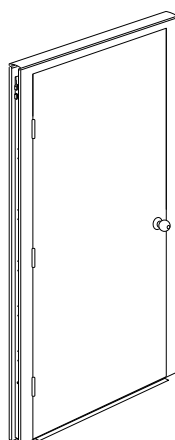

NDLS (Non-Powered)
NDWS
NDLW
NDWW



Left-hand door swing



Right-hand door swing

NOTES:

Most building codes for new buildings require a minimum clearance door width of 32" (814mm). To meet this requirement, the 42" (1067mm) wide door must be ordered.

Consult local building codes for clearance height requirements.

Features

- Includes door frame, panel locks, threshold, top cap, door, hinges, brushed aluminum knobs or ADA levers and lock set with one key.
- High-pressure laminate or wood veneer door surfaces.
- Door shipped with left- or right-hand swing as specified and can be field-changed.
- Top raceway is 1"(25mm) deep. See Cable Management Section for cabling capacities.
- Available on RUSH.

Specification Tips

- Connectors are required to create panel runs and intersection; specify separately.
- Doors will accept attached upper structure elements up to 120"(3048mm). See the Product Application Guidelines Section for planning rules.
- Hinged side of door should be placed next to supporting panels (as shown to left).
- Door may be placed a maximum of 24"(610mm) from supporting panels at 90°.
- Doors are not available with grooved top cap.
- Cannot be retrofitted with grooved top cap.

Door Opening Clearance

Door Size	Clearance	
	Height	Width
8036	78"(1981mm)	30"(762mm)
8042	78"(1981mm)	36"(914mm)

To Order, Specify:

Standard Top Cap Door

- Product number with handle designation.
 - K** Knob with brushed chrome finish
 - A** ADA lever with brushed aluminum finish
- Door swing designation.
 - L** Left-hand
 - R** Right-hand
- Door surface color (laminate or wood).
- Trim color for frame.*
- Trim color for top cap.*

Wood Top Cap Door


- Product number with handle designation.
 - K** Knob with brushed chrome finish
 - A** ADA lever with brushed chrome finish
- Door swing designation.
 - L** Left-hand
 - R** Right-hand
- Door surface color (laminate or wood).
- Trim color for frame.*
- Wood finish for top cap.

***Note:** Upcharge for mixed grade trim surfaces, refer to the electronic catalog for pricing.

Visual Privacy Elements

Panel Attached Screens

	Height	Width	Description	Number	Trim A	B
Enhanced PREMISE — for Monolithic/Stack Applications	47"(1194mm)	48"(1219mm)	Frosted insert	BBP-4748-GN	\$1226.12	\$1239.60
	52"(1321mm)			BBP-5248-GN	1295.27	1314.35
	63"(1600mm)			BBP-6348-GN	1432.44	1463.84
	47"(1194mm)	48"(1219mm)	Perforated metal	BBP-4748-PN	\$1260.15	\$1290.48
	52"(1321mm)			BBP-5248-PN	1329.30	1365.23
	63"(1600mm)			BBP-6348-PN	1466.47	1514.72



BBP-FN

Features

- Includes screen, two non-locking casters on post legs and attachment brackets.
- Perforated metal insert screen has no acoustical or tackable value.
- Screens are non-load bearing.
- Magnets can be used with perforated metal inserts.
- Frosted insert is identical to frosted and textured acrylic material used in desktop screens.
- Brackets are shipped unassembled.

Specification Tips

- Screens can mount on any width panel but panel runs must be at least 48"(1219mm).
- Screens mount on a panel taller than height of screen only. A full height trim cover is required when attaching the screen to a 53"(1346mm) high PREMISE monolithic panel that is combined with any size stack kit.
- Screen adds 2"(51mm) to panel width in stored position.
- Screen extends 41"(1041mm) beyond end of panel and 39"(991mm) from end of 2-way connection when fully extended.
- Screens mount parallel off panel end and/or in a 2-way condition.
- Screen adds 2"(51mm) to panel thickness.
- Screens are non-handed; brackets can be attached to either side.
- Can be used with open base panels.

To Order, Specify:

Frosted Insert

- 1) Product number.
- 2) Trim color for frame.
- 3) Trim color for panel attachment brackets.
- 4) Metallic trim color for casters.




Metal Insert

- 1) Product number.
- 2) Trim color for frame.
- 3) Trim color for perforated metal insert.
- 4) Trim color for panel attachment brackets.
- 5) Metallic trim color for casters.

This page intentionally blank

Foundation Elements — Super Base Panel

Standard or No Top Cap

NJ-SN
(Non-Powered)NJ-SA
(Open Base)NJ-SP
(3-Circuit Powered)

NOTES:

18" (457mm) wide panels are non-powered only. Specify extended power connectors to continue power through 18" (457mm) panels.

18" (457mm) wide perforated panels are not available.

Receptacle ports on the raceway cover measure 2" (51mm) top-to-bottom and 4 3/4" (121mm) side-to-side.

Powered panels with raceway covers ship with receptacle ports in the **base** raceway cover. Non-powered panels ship without receptacle ports in the **base** raceway cover. Powered panels with PDA but without raceway covers require separately specified base raceway covers for power and communication port locations other than the standard powered base raceway cover.

New York City (NYC) electrical applications require field installation of Power Distribution Assemblies (PDA). See Power Specifications on this page for details.

New York Port Authority (NYPA) electrical applications require metal raceway covers. See Power Specifications on this page for details.

When specifying stackable panels with wood pads, an unmatched vertical wood grain and natural variations in wood grain and color can be expected between pads. If a consistent look is desired, specify Matching Wood Pad Sets.

Some building codes may restrict the use of panel heights greater than 69" (1753mm). Consult your local code authority to assure that the furniture layout is compliant prior to installation.

Features

- **Non-powered and powered panels** include a panel core, panel locks, two pads with pad attachment brackets, vertical cable guide, painted top cap, with or without one-piece raceway cover; power distribution assembly/flex connector(s) when power is specified.
- **Open base panels** include a panel core, panel locks, two pads with pad attachment brackets, and painted top cap.
- Pads are field-removable for access to cabling or pad replacement.
- Pad options include: painted, fabric/tackable, fabric/acoustical/tackable, perforated, and wood.
- Panel surfaces may have the same fabric on both sides or a different fabric on each side.
- Assembled panel thickness is 3" (76mm).
- The base raceway is 6 3/4" (171mm) high.
- Powered panels are available for countries that utilize 120 volt 60 hertz electrical systems and U.S. configured plugs and outlets.
- Ships with unassembled pads, top cap and base raceway cover (if applicable).
- Available on RUSH with non-powered or open base raceway and 3-circuit and 4-circuit powered raceway.

Specification Tips

- Connectors are required to create panel runs and intersections; specify separately.
- Super base panel will accept upper structure elements up to 120" (3048mm).
- Flex connectors provided for powered super base panels accommodate straight in-line, inside 90°, and inside 120° conditions (if applicable). See price list pages for additional flex connector applications.
- Powered panels will only accept triplex receptacles; specify separately.
- Due to the aesthetic properties of the perforated surface material, it is not recommended to route cables behind pads.
- Open base is not available with power or base raceway cover.
- No top cap option is offered to reduce the number of top cap seams within a panel run. To be used with a separately specified grooved top cap long enough to span more than one panel. Refer to Grooved Top Cap for application details.
- No top cap option must be used with a separately specified grooved top cap.
- Use extended power connectors to pass through 18" (457mm) or 24" (610mm) non-powered panel.
- Base raceway is 6 3/4" (171mm) high for all power options.
- Do not mix 3-circuit with 4-circuit components. Do not mix 2+2 and 3+1 components. Components have unique polarity key and color coding.
- 3-circuit and 4-circuit power options include power distribution assembly, flex connector and powered raceway cover.
- New York City (NYC) and New York Port Authority (NYPA) electrical applications require field installation of Power Distribution Assembly (PDA).
- Hardwire option includes powered raceway cover only. Separately specify hardwire electrical kit for base raceway.
- Raceway cover needs to be separately specified for no raceway cover option.

To Order, Specify:

1) Product number, including:

① Top Cap Option:

- S** Standard
- 5** No Top Cap, deduct **\$58.43** list

② Base Option:

- N** Non-Powered
- M** Non-Powered, NYPA, add **\$108.68** list
- A** Open Base

3-Circuit: 24"-60" wide

- P** 3-Circuit, add **\$198.64** list
- Y** 3-Circuit – NYC, add **\$177.61** list
- R** 3-Circuit – NYPA, add **\$286.29** list
- E** 3-Circuit – No raceway cover option with PDA, add **\$191.63** list
- C** Hardwire with raceway

4-Circuit: 24"-60" wide

- 2** 4-Circuit – 2+2, add **\$206.83** list
- W** 4-Circuit – 2+2 NYC, add **\$185.80** list
- T** 4-Circuit – 2+2 NYPA, add **\$294.48** list
- H** 4-Circuit – 2+2 no raceway cover option with PDA, add **\$199.82** list
- 4** 4-Circuit – 3+1, add **\$206.83** list
- V** 4-Circuit – 3+1 NYC, add **\$185.80** list
- S** 4-Circuit – 3+1 NYPA, add **294.48** list
- D** 4-Circuit – 3+1 no raceway cover option with PDA, add **\$199.82** list

- 2) Painted, fabric/colorway, or wood finish for side one.*
- 3) Painted, fabric/colorway, or wood finish for side two.*
- 4) Trim color for base raceway cover (if applicable).*
- 5) Trim color for top cap (if applicable).*

*Note: Upcharge for mixed grade fabric or trim surfaces, refer to the electronic catalog for pricing.

Foundation Elements — Super Base Panel

Standard or No Top Cap

Standard of the Top Cap											
Height	Width	Side 1 Pad Surface	Side 2 Pad Surface	Number ①②	Trim A	Trim A Fabric Grade A B	C	E	F	G	
32”(813mm)	18”(457mm)	Painted	Painted	NJPP-3218-■ ■	\$ 502.48						
	24”(610mm)			NJPP-3224-■ ■	551.55						
	30”(762mm)			NJPP-3230-■ ■	633.34						
	36”(914mm)			NJPP-3236-■ ■	682.41						
	42”(1067mm)			NJPP-3242-■ ■	731.48						
	48”(1219mm)			NJPP-3248-■ ■	780.55						
	60”(1524mm)			NJPP-3260-■ ■	966.33						
32”(813mm)	18”(457mm)	Painted	Fabric/ Tackable	NJPF-3218-■ ■		\$ 531.11	\$ 539.29	\$ 552.14	\$ 575.51	\$ 580.19	\$ 597.72
	24”(610mm)			NJPF-3224-■ ■		583.80	594.32	609.51	637.55	644.57	664.44
	30”(762mm)			NJPF-3230-■ ■		669.21	682.07	699.60	732.31	741.67	763.88
	36”(914mm)			NJPF-3236-■ ■		721.90	737.10	756.97	794.35	806.05	830.60
	42”(1067mm)			NJPF-3242-■ ■		774.59	792.13	814.34	856.39	870.43	897.32
	48”(1219mm)			NJPF-3248-■ ■		827.28	847.16	871.71	918.43	934.81	964.04
	60”(1524mm)			NJPF-3260-■ ■		932.66	957.22	986.45	1042.51	1063.57	1097.48
32”(813mm)	18”(457mm)	Painted	Fabric/Acous./ Tackable	NJPA-3218-■ ■		\$ 554.48	\$ 562.66	\$ 575.51	\$ 598.88	\$ 603.56	\$ 621.09
	24”(610mm)			NJPA-3224-■ ■		607.17	617.69	632.88	660.92	667.94	687.81
	30”(762mm)			NJPA-3230-■ ■		692.58	705.44	722.97	755.68	765.04	787.25
	36”(914mm)			NJPA-3236-■ ■		745.27	760.47	780.34	817.72	829.42	853.97
	42”(1067mm)			NJPA-3242-■ ■		797.96	815.50	837.71	879.76	893.80	920.69
	48”(1219mm)			NJPA-3248-■ ■		850.65	870.53	895.08	941.80	958.18	987.41
	60”(1524mm)			NJPA-3260-■ ■		956.03	980.59	1009.82	1065.88	1086.94	1120.85
32”(813mm)	18”(457mm)	Fabric/ Tackable	Fabric/ Tackable	NJFF-3218-■ ■		\$ 559.74	\$ 576.10	\$ 601.80	\$ 648.54	\$ 657.90	\$ 692.96
	24”(610mm)			NJFF-3224-■ ■ ■		616.05	637.09	667.47	723.55	737.59	777.33
	30”(762mm)			NJFF-3230-■ ■ ■		705.08	730.80	765.86	831.28	850.00	894.42
	36”(914mm)			NJFF-3236-■ ■ ■		761.39	791.79	831.53	906.29	929.69	978.79
	42”(1067mm)			NJFF-3242-■ ■ ■		817.70	852.78	897.20	981.30	1009.38	1063.16
	48”(1219mm)			NJFF-3248-■ ■ ■		874.01	913.77	962.87	1056.31	1089.07	1147.53
	60”(1524mm)			NJFF-3260-■ ■ ■		986.63	1035.75	1094.21	1206.33	1248.45	1316.27
32”(813mm)	18”(457mm)	Fabric/ Tackable	Fabric/Acous./ Tackable	NJFA-3218-■ ■		\$ 583.11	\$ 599.47	\$ 625.17	\$ 671.91	\$ 681.27	\$ 716.33
	24”(610mm)			NJFA-3224-■ ■ ■		639.42	660.46	690.84	746.92	760.96	800.70
	30”(762mm)			NJFA-3230-■ ■ ■		728.45	754.17	789.23	854.65	873.37	917.79
	36”(914mm)			NJFA-3236-■ ■ ■		784.76	815.16	854.90	929.66	953.06	1002.16
	42”(1067mm)			NJFA-3242-■ ■ ■		841.07	876.15	920.57	1004.67	1032.75	1086.53
	48”(1219mm)			NJFA-3248-■ ■ ■		897.38	937.14	986.24	1079.68	1112.44	1170.90
	60”(1524mm)			NJFA-3260-■ ■ ■		1010.00	1059.12	1117.58	1229.70	1271.82	1339.64
32”(813mm)	18”(457mm)	Fabric/Acous./ Tackable	Fabric/Acous./ Tackable	NJAA-3218-■ ■		\$ 583.11	\$ 599.47	\$ 625.17	\$ 671.91	\$ 681.27	\$ 716.33
	24”(610mm)			NJAA-3224-■ ■ ■		639.42	660.46	690.84	746.92	760.96	800.70
	30”(762mm)			NJAA-3230-■ ■ ■		728.45	754.17	789.23	854.65	873.37	917.79
	36”(914mm)			NJAA-3236-■ ■ ■		784.76	815.16	854.90	929.66	953.06	1002.16
	42”(1067mm)			NJAA-3242-■ ■ ■		841.07	876.15	920.57	1004.67	1032.75	1086.53
	48”(1219mm)			NJAA-3248-■ ■ ■		897.38	937.14	986.24	1079.68	1112.44	1170.90
	60”(1524mm)			NJAA-3260-■ ■ ■		1010.00	1059.12	1117.58	1229.70	1271.82	1339.64
32”(813mm)	24”(610mm)	Perforated	Perforated	NJHH-3224-■ ■	\$ 895.09						
	30”(762mm)			NJHH-3230-■ ■	1016.60						
	36”(914mm)			NJHH-3236-■ ■	1105.39						
	42”(1067mm)			NJHH-3242-■ ■	1258.45						
	48”(1219mm)			NJHH-3248-■ ■	1347.24						
	60”(1524mm)			NJHH-3260-■ ■	1612.46						

List price shown is with non-powered base raceway.

Foundation Elements — Super Base Panel

Standard or No Top Cap

Height	Width	Side 1 Pad Surface	Side 2 Pad Surface	Number ①②	Trim B	Trim B Fabric Grade A	B	C	E	F	G
32"(813mm)	18"(457mm)	Painted	Painted	NJPP-3218-■ ■	\$ 558.57						
	24"(610mm)			NJPP-3224-■ ■	613.64						
	30"(762mm)			NJPP-3230-■ ■	701.43						
	36"(914mm)			NJPP-3236-■ ■	756.50						
	42"(1067mm)			NJPP-3242-■ ■	811.57						
	48"(1219mm)			NJPP-3248-■ ■	866.64						
	60"(1524mm)			NJPP-3260-■ ■	1064.42						
32"(813mm)	18"(457mm)	Painted	Fabric/ Tackable	NJPF-3218-■ ■		\$ 569.74	\$ 577.92	\$ 590.77	\$ 614.14	\$ 618.82	\$ 636.35
	24"(610mm)			NJPF-3224-■ ■		623.60	634.12	649.31	677.35	684.37	704.24
	30"(762mm)			NJPF-3230-■ ■		710.18	723.04	740.57	773.28	782.64	804.85
	36"(914mm)			NJPF-3236-■ ■		764.04	779.24	799.11	836.49	848.19	872.74
	42"(1067mm)			NJPF-3242-■ ■		817.90	835.44	857.65	899.70	913.74	940.63
	48"(1219mm)			NJPF-3248-■ ■		871.76	891.64	916.19	962.91	979.29	1008.52
	60"(1524mm)			NJPF-3260-■ ■		979.48	1004.04	1033.27	1089.33	1110.39	1144.30
32"(813mm)	18"(457mm)	Painted	Fabric/Acous./ Tackable	NJPA-3218-■ ■		\$ 593.11	\$ 601.29	\$ 614.14	\$ 637.51	\$ 642.19	\$ 659.72
	24"(610mm)			NJPA-3224-■ ■		646.97	657.49	672.68	700.72	707.74	727.61
	30"(762mm)			NJPA-3230-■ ■		733.55	746.41	763.94	796.65	806.01	828.22
	36"(914mm)			NJPA-3236-■ ■		787.41	802.61	822.48	859.86	871.56	896.11
	42"(1067mm)			NJPA-3242-■ ■		841.27	858.81	881.02	923.07	937.11	964.00
	48"(1219mm)			NJPA-3248-■ ■		895.13	915.01	939.56	986.28	1002.66	1031.89
	60"(1524mm)			NJPA-3260-■ ■		1002.85	1027.41	1056.64	1112.70	1133.76	1167.67
32"(813mm)	18"(457mm)	Fabric/ Tackable	Fabric/ Tackable	NJFF-3218-■ ■		\$ 580.91	\$ 597.27	\$ 622.97	\$ 669.71	\$ 679.07	\$ 714.13
	24"(610mm)			NJFF-3224-■ ■ ■		637.22	658.26	688.64	744.72	758.76	798.50
	30"(762mm)			NJFF-3230-■ ■ ■		726.25	751.97	787.03	852.45	871.17	915.59
	36"(914mm)			NJFF-3236-■ ■ ■		782.56	812.96	852.70	927.46	950.86	999.96
	42"(1067mm)			NJFF-3242-■ ■ ■		838.87	873.95	918.37	1002.47	1030.55	1084.33
	48"(1219mm)			NJFF-3248-■ ■ ■		895.18	934.94	984.04	1077.48	1110.24	1168.70
	60"(1524mm)			NJFF-3260-■ ■ ■		1007.80	1056.92	1115.38	1227.50	1269.62	1337.44
32"(813mm)	18"(457mm)	Fabric/ Tackable	Fabric/Acous./ Tackable	NJFA-3218-■ ■		\$ 604.28	\$ 620.64	\$ 646.34	\$ 693.08	\$ 702.44	\$ 737.50
	24"(610mm)			NJFA-3224-■ ■ ■		660.59	681.63	712.01	768.09	782.13	821.87
	30"(762mm)			NJFA-3230-■ ■ ■		749.62	775.34	810.40	875.82	894.54	938.96
	36"(914mm)			NJFA-3236-■ ■ ■		805.93	836.33	876.07	950.83	974.23	1023.33
	42"(1067mm)			NJFA-3242-■ ■ ■		862.24	897.32	941.74	1025.84	1053.92	1107.70
	48"(1219mm)			NJFA-3248-■ ■ ■		918.55	958.31	1007.41	1100.85	1133.61	1192.07
	60"(1524mm)			NJFA-3260-■ ■ ■		1031.17	1080.29	1138.75	1250.87	1292.99	1360.81
32"(813mm)	18"(457mm)	Fabric/Acous./ Tackable	Fabric/Acous./ Tackable	NJAA-3218-■ ■		\$ 604.28	\$ 620.64	\$ 646.34	\$ 693.08	\$ 702.44	\$ 737.50
	24"(610mm)			NJAA-3224-■ ■ ■		660.59	681.63	712.01	768.09	782.13	821.87
	30"(762mm)			NJAA-3230-■ ■ ■		749.62	775.34	810.40	875.82	894.54	938.96
	36"(914mm)			NJAA-3236-■ ■ ■		805.93	836.33	876.07	950.83	974.23	1023.33
	42"(1067mm)			NJAA-3242-■ ■ ■		862.24	897.32	941.74	1025.84	1053.92	1107.70
	48"(1219mm)			NJAA-3248-■ ■ ■		918.55	958.31	1007.41	1100.85	1133.61	1192.07
	60"(1524mm)			NJAA-3260-■ ■ ■		1031.17	1080.29	1138.75	1250.87	1292.99	1360.81
32"(813mm)	24"(610mm)	Perforated	Perforated	NJHH-3224-■ ■	\$ 957.18						
	30"(762mm)			NJHH-3230-■ ■	1084.69						
	36"(914mm)			NJHH-3236-■ ■	1179.48						
	42"(1067mm)			NJHH-3242-■ ■	1338.54						
	48"(1219mm)			NJHH-3248-■ ■	1433.33						
	60"(1524mm)			NJHH-3260-■ ■	1710.55						

List price shown is with non-powered base raceway.

Foundation Elements — Super Base Panel

Standard or No Top Cap

Standard of the Top Cap											
Height	Width	Side 1 Pad Surface	Side 2 Pad Surface	Number ①②	Trim A Fabric Grade A	B	C	E	F	G	
Wood Group A											
32”(813mm)	18”(457mm)	Fabric/ Tackable	Wood	NJFW-3218	■ ■	\$ 778.26	\$ 786.44	\$ 799.29	\$ 822.66	\$ 827.34	\$ 844.87
	24”(610mm)			NJFW-3224	■ ■	844.39	854.91	870.10	898.14	905.16	925.03
	30”(762mm)			NJFW-3230	■ ■	943.24	956.10	973.63	1006.34	1015.70	1037.91
	36”(914mm)			NJFW-3236	■ ■	1009.37	1024.57	1044.44	1081.82	1093.52	1118.07
	42”(1067mm)			NJFW-3242	■ ■	1075.50	1093.04	1115.25	1157.30	1171.34	1198.23
	48”(1219mm)			NJFW-3248	■ ■	1141.63	1161.51	1186.06	1232.78	1249.16	1278.39
	60”(1524mm)			NJFW-3260	■ ■	1273.89	1298.45	1327.68	1383.74	1404.80	1438.71
Wood Group B											
32”(813mm)	18”(457mm)	Fabric/ Tackable	Wood	NJFW-3218	■ ■	\$ 792.28	\$ 800.46	\$ 813.31	\$ 836.68	\$ 841.36	\$ 858.89
	24”(610mm)			NJFW-3224	■ ■	860.74	871.26	886.45	914.49	921.51	941.38
	30”(762mm)			NJFW-3230	■ ■	961.92	974.78	992.31	1025.02	1034.38	1056.59
	36”(914mm)			NJFW-3236	■ ■	1030.38	1045.58	1065.45	1102.83	1114.53	1139.08
	42”(1067mm)			NJFW-3242	■ ■	1098.84	1116.38	1138.59	1180.64	1194.68	1221.57
	48”(1219mm)			NJFW-3248	■ ■	1167.30	1187.18	1211.73	1258.45	1274.83	1304.06
	60”(1524mm)			NJFW-3260	■ ■	1304.22	1328.78	1358.01	1414.07	1435.13	1469.04
Wood Group A											
32”(813mm)	18”(457mm)	Fabric/Acous./ Tackable	Wood	NJAW-3218	■ ■	\$ 801.63	\$ 809.81	\$ 822.66	\$ 846.03	\$ 850.71	\$ 868.24
	24”(610mm)			NJAW-3224	■ ■	867.76	878.28	893.47	921.51	928.53	948.40
	30”(762mm)			NJAW-3230	■ ■	966.61	979.47	997.00	1029.71	1039.07	1061.28
	36”(914mm)			NJAW-3236	■ ■	1032.74	1047.94	1067.81	1105.19	1116.89	1141.44
	42”(1067mm)			NJAW-3242	■ ■	1098.87	1116.41	1138.62	1180.67	1194.71	1221.60
	48”(1219mm)			NJAW-3248	■ ■	1165.00	1184.88	1209.43	1256.15	1272.53	1301.76
	60”(1524mm)			NJAW-3260	■ ■	1297.26	1321.82	1351.05	1407.11	1428.17	1462.08
Wood Group B											
32”(813mm)	18”(457mm)	Fabric/Acous./ Tackable	Wood	NJAW-3218	■ ■	\$ 815.65	\$ 823.83	\$ 836.68	\$ 860.05	\$ 864.73	\$ 882.26
	24”(610mm)			NJAW-3224	■ ■	884.11	894.63	909.82	937.86	944.88	964.75
	30”(762mm)			NJAW-3230	■ ■	985.29	998.15	1015.68	1048.39	1057.75	1079.96
	36”(914mm)			NJAW-3236	■ ■	1053.75	1068.95	1088.82	1126.20	1137.90	1162.45
	42”(1067mm)			NJAW-3242	■ ■	1122.21	1139.75	1161.96	1204.01	1218.05	1244.94
	48”(1219mm)			NJAW-3248	■ ■	1190.67	1210.55	1235.10	1281.82	1298.20	1327.43
	60”(1524mm)			NJAW-3260	■ ■	1327.59	1352.15	1381.38	1437.44	1458.50	1492.41
						Wood Group A	Wood Group B				
32”(813mm)	18”(457mm)	Wood	Wood	NJWW-3218	■ ■	\$ 996.78	\$1024.82				
	24”(610mm)			NJWW-3224	■ ■	1072.73	1105.43				
	30”(762mm)			NJWW-3230	■ ■	1181.40	1218.76				
	36”(914mm)			NJWW-3236	■ ■	1257.35	1299.37				
	42”(1067mm)			NJWW-3242	■ ■	1333.30	1379.98				
	48”(1219mm)			NJWW-3248	■ ■	1409.25	1460.59				
	60”(1524mm)			NJWW-3260	■ ■	1648.79	1709.45				

List price shown is with non-powered base raceway.

Foundation Elements — Super Base Panel

Standard or No Top Cap


Height	Width	Side 1 Pad Surface	Side 2 Pad Surface	Number ①②	Trim B Fabric Grade A	B	C	E	F	G
Wood Group A										
32"(813mm)	18"(457mm)	Fabric/ Tackable	Wood	NJFW-3218 ■ ■	\$ 799.43	\$ 807.61	\$ 820.46	\$ 843.83	\$ 848.51	\$ 866.04
	24"(610mm)			NJFW-3224 ■ ■	865.56	876.08	891.27	919.31	926.33	946.20
	30"(762mm)			NJFW-3230 ■ ■	964.41	977.27	994.80	1027.51	1036.87	1059.08
	36"(914mm)			NJFW-3236 ■ ■	1030.54	1045.74	1065.61	1102.99	1114.69	1139.24
	42"(1067mm)			NJFW-3242 ■ ■	1096.67	1114.21	1136.42	1178.47	1192.51	1219.40
	48"(1219mm)			NJFW-3248 ■ ■	1162.80	1182.68	1207.23	1253.95	1270.33	1299.56
	60"(1524mm)			NJFW-3260 ■ ■	1295.06	1319.62	1348.85	1404.91	1425.97	1459.88
Wood Group B										
32"(813mm)	18"(457mm)	Fabric/ Tackable	Wood	NJFW-3218 ■ ■	\$ 813.45	\$ 821.63	\$ 834.48	\$ 857.85	\$ 862.53	\$ 880.06
	24"(610mm)			NJFW-3224 ■ ■	881.91	892.43	907.62	935.66	942.68	962.55
	30"(762mm)			NJFW-3230 ■ ■	983.09	995.95	1013.48	1046.19	1055.55	1077.76
	36"(914mm)			NJFW-3236 ■ ■	1051.55	1066.75	1086.62	1124.00	1135.70	1160.25
	42"(1067mm)			NJFW-3242 ■ ■	1120.01	1137.55	1159.76	1201.81	1215.85	1242.74
	48"(1219mm)			NJFW-3248 ■ ■	1188.47	1208.35	1232.90	1279.62	1296.00	1325.23
	60"(1524mm)			NJFW-3260 ■ ■	1325.39	1349.95	1379.18	1435.24	1456.30	1490.21
Wood Group A										
32"(813mm)	18"(457mm)	Fabric/Acous./ Tackable	Wood	NJAW-3218 ■ ■	\$ 822.80	\$ 830.98	\$ 843.83	\$ 867.20	\$ 871.88	\$ 889.41
	24"(610mm)			NJAW-3224 ■ ■	888.93	899.45	914.64	942.68	949.70	969.57
	30"(762mm)			NJAW-3230 ■ ■	987.78	1000.64	1018.17	1050.88	1060.24	1082.45
	36"(914mm)			NJAW-3236 ■ ■	1053.91	1069.11	1088.98	1126.36	1138.06	1162.61
	42"(1067mm)			NJAW-3242 ■ ■	1120.04	1137.58	1159.79	1201.84	1215.88	1242.77
	48"(1219mm)			NJAW-3248 ■ ■	1186.17	1206.05	1230.60	1277.32	1293.70	1322.93
	60"(1524mm)			NJAW-3260 ■ ■	1318.43	1342.99	1372.22	1428.28	1449.34	1483.25
Wood Group B										
32"(813mm)	18"(457mm)	Fabric/Acous./ Tackable	Wood	NJAW-3218 ■ ■	\$ 836.82	\$ 845.00	\$ 857.85	\$ 881.22	\$ 885.90	\$ 903.43
	24"(610mm)			NJAW-3224 ■ ■	905.28	915.80	930.99	959.03	966.05	985.92
	30"(762mm)			NJAW-3230 ■ ■	1006.46	1019.32	1036.85	1069.56	1078.92	1101.13
	36"(914mm)			NJAW-3236 ■ ■	1074.92	1090.12	1109.99	1147.37	1159.07	1183.62
	42"(1067mm)			NJAW-3242 ■ ■	1143.38	1160.92	1183.13	1225.18	1239.22	1266.11
	48"(1219mm)			NJAW-3248 ■ ■	1211.84	1231.72	1256.27	1302.99	1319.37	1348.60
	60"(1524mm)			NJAW-3260 ■ ■	1348.76	1373.32	1402.55	1458.61	1479.67	1513.58
					Wood Group A			Wood Group B		
32"(813mm)	18"(457mm)	Wood	Wood	NJWW-3218 ■ ■	\$1017.95			\$1045.99		
	24"(610mm)			NJWW-3224 ■ ■	1093.90			1126.60		
	30"(762mm)			NJWW-3230 ■ ■	1202.57			1239.93		
	36"(914mm)			NJWW-3236 ■ ■	1278.52			1320.54		
	42"(1067mm)			NJWW-3242 ■ ■	1354.47			1401.15		
	48"(1219mm)			NJWW-3248 ■ ■	1430.42			1481.76		
	60"(1524mm)			NJWW-3260 ■ ■	1669.96			1730.62		

List price shown is with non-powered base raceway.


This page intentionally blank

Foundation Elements — Super Base Panel


Grooved Top Cap



NJ-GN
(Non-Powered)



NJ-GA
(Open Base)



NJ-GP
(3-Circuit Powered)



NOTES:

18" (457mm) wide panels are non-powered only. Specify extended power connectors to continue power through 18" (457mm) panels.

18" (457mm) wide perforated panels are not available.

Receptacle ports on the raceway cover measure 2" (51mm) top-to-bottom and 4 3/4" (121mm) side-to-side.

Powered panels with raceway covers ship with receptacle ports in the **base** raceway cover. Non-powered panels ship without receptacle ports in the **base** raceway cover. Powered panels with PDA but without raceway covers require separately specified base raceway covers for power and communication port locations other than the standard powered base raceway cover.

New York City (NYC) electrical applications require field installation of Power Distribution Assemblies (PDA). See Power Specifications on this page for details.

New York Port Authority (NYPA) electrical applications require metal raceway covers. See Power Specifications on this page for details.

When specifying stackable panels with wood pads, an unmatched vertical wood grain and natural variations in wood grain and color can be expected between pads. If a consistent look is desired, specify Matching Wood Pad Sets.

Some building codes may restrict the use of panel heights greater than 69" (1753mm). Consult your local code authority to assure that the furniture layout is compliant prior to installation.

Features

- **Non-powered and powered panels** include a panel core, panel locks, two pads with pad attachment brackets, vertical cable guide, grooved top cap, with or without one-piece raceway cover; power distribution assembly/flex connector(s) when power is specified.
- **Open base panels** include a panel core, panel locks, two pads with pad attachment brackets, and grooved top cap.
- Grooved top caps allow attachment of panel attached screens, canopies, Jump Stuff ambient lights and off-modular components.
- Pads are field-removable for access to cabling or pad replacement.
- Pad options include: painted, fabric/tackable, fabric/acoustical/tackable, perforated, and wood.
- Panel surfaces may have the same fabric on both sides or a different fabric on each side.
- Assembled panel thickness is 3" (76mm).
- The base raceway is 6 3/4" (171mm) high. For cabling capacities, see the Power and Cable Management Section for details.
- Powered panels are available for countries that utilize 120 volt 60 hertz electrical systems and U.S. configured plugs and outlets.
- Ships with unassembled pads, top cap and base raceway cover (if applicable).
- Available on RUSH with non-powered or open base raceway and 3-circuit and 4-circuit powered raceway.

Specification Tips

- Connectors are required to create panel runs and intersections; specify separately.
- Super base panel will accept upper structure elements up to 120" (3048mm). See the Product Application Guidelines Section for planning rules.
- Flex connectors provided for powered super base panels accommodate straight in-line, inside 90°, and inside 120° conditions (if applicable). See price list pages for additional flex connector applications.
- Powered panels will only accept triplex receptacles; specify separately.
- Due to the aesthetic properties of the perforated surface material, it is not recommended to route cables behind pads.
- Open base is not available with power or base raceway cover.
- Use extended power connectors to pass through 18" (457mm) or 24" (610mm) non-powered panel.
- Base raceway is 6 3/4" (171mm) high for all power options.
- Do not mix 3-circuit with 4-circuit components. Do not mix 2+2 and 3+1 components. Components have unique polarity key and color coding.
- 3-circuit and 4-circuit power options include power distribution assembly, flex connector and powered raceway cover.
- New York City (NYC) and New York Port Authority (NYPA) electrical applications require field installation of Power Distribution Assembly (PDA).
- Hardwire option includes powered raceway cover only. Separately specify hardwire electrical kit for base raceway.
- Raceway cover needs to be separately specified for no raceway cover option.

To Order, Specify:

- 1) Product number, including:

1 Base Option:

- N** Non-Powered
- M** Non-Powered, NYPA, add **\$108.68** list
- A** Open Base

3-Circuit: 24"-60" wide

- P** 3-Circuit, add **\$198.64** list
- Y** 3-Circuit – NYC, add **\$177.61** list
- R** 3-Circuit – NYPA, add **\$286.29** list
- E** 3-Circuit – No raceway cover option with PDA, add **\$191.63** list
- C** Hardwire with raceway

4-Circuit: 24"-60" wide

- 2** 4-Circuit – 2+2, add **\$206.83** list
- W** 4-Circuit – 2+2 NYC, add **\$185.80** list
- T** 4-Circuit – 2+2 NYPA, add **\$294.48** list
- H** 4-Circuit – 2+2 no raceway cover option with PDA, add **\$199.82** list
- 4** 4-Circuit – 3+1, add **\$206.83** list
- V** 4-Circuit – 3+1 NYC, add **\$185.80** list
- S** 4-Circuit – 3+1 NYPA, add **\$294.48** list
- D** 4-Circuit – 3+1 no raceway cover option with PDA, add **\$199.82** list

- 2) Painted, fabric/colorway, or wood finish for side one.*
- 3) Painted, fabric/colorway, or wood finish for side two.*
- 4) Trim color for base raceway cover (if applicable).*
- 5) Trim color for top cap (if applicable).*

*Note: Upcharge for mixed grade fabric or trim surfaces, refer to the electronic catalog for pricing.

Foundation Elements — Super Base Panel

Grooved Top Cap

Height	Width	Side 1 Pad Surface	Side 2 Pad Surface	Number ①	Trim A	Trim A Fabric Grade A B C E F G
32"(813mm)	18"(457mm)	Painted	Painted	NJPP-3218-G	\$ 609.98	
	24"(610mm)			NJPP-3224-G	659.05	
	30"(762mm)			NJPP-3230-G	740.84	
	36"(914mm)			NJPP-3236-G	789.91	
	42"(1067mm)			NJPP-3242-G	838.98	
	48"(1219mm)			NJPP-3248-G	888.05	
	60"(1524mm)			NJPP-3260-G	1073.83	
32"(813mm)	18"(457mm)	Painted	Fabric/ Tackable	NJPF-3218-G		\$ 638.61 \$ 646.79 \$ 659.64 \$ 683.01 \$ 687.69 \$ 705.22
	24"(610mm)			NJPF-3224-G	691.30	701.82 717.01 745.05 752.07 771.94
	30"(762mm)			NJPF-3230-G	776.71	789.57 807.10 839.81 849.17 871.38
	36"(914mm)			NJPF-3236-G	829.40	844.60 864.47 901.85 913.55 938.10
	42"(1067mm)			NJPF-3242-G	882.09	899.63 921.84 963.89 977.93 1004.82
	48"(1219mm)			NJPF-3248-G	934.78	954.66 979.21 1025.93 1042.31 1071.54
	60"(1524mm)			NJPF-3260-G	1040.16	1064.72 1093.95 1150.01 1171.07 1204.98
32"(813mm)	18"(457mm)	Painted	Fabric/Acous./ Tackable	NJPA-3218-G		\$ 661.98 \$ 670.16 \$ 683.01 \$ 706.38 \$ 711.06 \$ 728.59
	24"(610mm)			NJPA-3224-G	714.67	725.19 740.38 768.42 775.44 795.31
	30"(762mm)			NJPA-3230-G	800.08	812.94 830.47 863.18 872.54 894.75
	36"(914mm)			NJPA-3236-G	852.77	867.97 887.84 925.22 936.92 961.47
	42"(1067mm)			NJPA-3242-G	905.46	923.00 945.21 987.26 1001.30 1028.19
	48"(1219mm)			NJPA-3248-G	958.15	978.03 1002.58 1049.30 1065.68 1094.91
	60"(1524mm)			NJPA-3260-G	1063.53	1088.09 1117.32 1173.38 1194.44 1228.35
32"(813mm)	18"(457mm)	Fabric/ Tackable	Fabric/ Tackable	NJFF-3218-G		\$ 667.24 \$ 683.60 \$ 709.30 \$ 756.04 \$ 765.40 \$ 800.46
	24"(610mm)			NJFF-3224-G	723.55	744.59 774.97 831.05 845.09 884.83
	30"(762mm)			NJFF-3230-G	812.58	838.30 873.36 938.78 957.50 1001.92
	36"(914mm)			NJFF-3236-G	868.89	899.29 939.03 1013.79 1037.19 1086.29
	42"(1067mm)			NJFF-3242-G	925.20	960.28 1004.70 1088.80 1116.88 1170.66
	48"(1219mm)			NJFF-3248-G	981.51	1021.27 1070.37 1163.81 1196.57 1255.03
	60"(1524mm)			NJFF-3260-G	1094.13	1143.25 1201.71 1313.83 1355.95 1423.77
32"(813mm)	18"(457mm)	Fabric/ Tackable	Fabric/Acous./ Tackable	NJFA-3218-G		\$ 690.61 \$ 706.97 \$ 732.67 \$ 779.41 \$ 788.77 \$ 823.83
	24"(610mm)			NJFA-3224-G	746.92	767.96 798.34 854.42 868.46 908.20
	30"(762mm)			NJFA-3230-G	835.95	861.67 896.73 962.15 980.87 1025.29
	36"(914mm)			NJFA-3236-G	892.26	922.66 962.40 1037.16 1060.56 1109.66
	42"(1067mm)			NJFA-3242-G	948.57	983.65 1028.07 1112.17 1140.25 1194.03
	48"(1219mm)			NJFA-3248-G	1004.88	1044.64 1093.74 1187.18 1219.94 1278.40
	60"(1524mm)			NJFA-3260-G	1117.50	1166.62 1225.08 1337.20 1379.32 1447.14
32"(813mm)	18"(457mm)	Fabric/Acous./ Tackable	Fabric/Acous./ Tackable	NJAA-3218-G		\$ 690.61 \$ 706.97 \$ 732.67 \$ 779.41 \$ 788.77 \$ 823.83
	24"(610mm)			NJAA-3224-G	746.92	767.96 798.34 854.42 868.46 908.20
	30"(762mm)			NJAA-3230-G	835.95	861.67 896.73 962.15 980.87 1025.29
	36"(914mm)			NJAA-3236-G	892.26	922.66 962.40 1037.16 1060.56 1109.66
	42"(1067mm)			NJAA-3242-G	948.57	983.65 1028.07 1112.17 1140.25 1194.03
	48"(1219mm)			NJAA-3248-G	1004.88	1044.64 1093.74 1187.18 1219.94 1278.40
	60"(1524mm)			NJAA-3260-G	1117.50	1166.62 1225.08 1337.20 1379.32 1447.14
32"(813mm)	24"(610mm)	Perforated	Perforated	NJHH-3224-G	\$1002.59	
	30"(762mm)			NJHH-3230-G	1124.10	
	36"(914mm)			NJHH-3236-G	1212.89	
	42"(1067mm)			NJHH-3242-G	1365.95	
	48"(1219mm)			NJHH-3248-G	1454.74	
	60"(1524mm)			NJHH-3260-G	1719.96	

List price shown is with non-powered base raceway.

Foundation Elements — Super Base Panel




































Grooved Top Cap

Height	Width	Side 1 Pad Surface	Side 2 Pad Surface	Number ①	Trim B	Trim B Fabric Grade A B C E F G
32"(813mm)	18"(457mm)	Painted	Painted	NJPP-3218-G	\$ 666.07	
	24"(610mm)			NJPP-3224-G	721.14	
	30"(762mm)			NJPP-3230-G	808.93	
	36"(914mm)			NJPP-3236-G	864.00	
	42"(1067mm)			NJPP-3242-G	919.07	
	48"(1219mm)			NJPP-3248-G	974.14	
	60"(1524mm)			NJPP-3260-G	1171.92	
32"(813mm)	18"(457mm)	Painted	Fabric/ Tackable	NJPF-3218-G	\$ 677.24	\$ 685.42 \$ 698.27 \$ 721.64 \$ 726.32 \$ 743.85
	24"(610mm)			NJPF-3224-G	731.10	741.62 756.81 784.85 791.87 811.74
	30"(762mm)			NJPF-3230-G	817.68	830.54 848.07 880.78 890.14 912.35
	36"(914mm)			NJPF-3236-G	871.54	886.74 906.61 943.99 955.69 980.24
	42"(1067mm)			NJPF-3242-G	925.40	942.94 965.15 1007.20 1021.24 1048.13
	48"(1219mm)			NJPF-3248-G	979.26	999.14 1023.69 1070.41 1086.79 1116.02
	60"(1524mm)			NJPF-3260-G	1086.98	1111.54 1140.77 1196.83 1217.89 1251.80
32"(813mm)	18"(457mm)	Painted	Fabric/Acous./ Tackable	NJPA-3218-G	\$ 700.61	\$ 708.79 \$ 721.64 \$ 745.01 \$ 749.69 \$ 767.22
	24"(610mm)			NJPA-3224-G	754.47	764.99 780.18 808.22 815.24 835.11
	30"(762mm)			NJPA-3230-G	841.05	853.91 871.44 904.15 913.51 935.72
	36"(914mm)			NJPA-3236-G	894.91	910.11 929.98 967.36 979.06 1003.61
	42"(1067mm)			NJPA-3242-G	948.77	966.31 988.52 1030.57 1044.61 1071.50
	48"(1219mm)			NJPA-3248-G	1002.63	1022.51 1047.06 1093.78 1110.16 1139.39
	60"(1524mm)			NJPA-3260-G	1110.35	1134.91 1164.14 1220.20 1241.26 1275.17
32"(813mm)	18"(457mm)	Fabric/ Tackable	Fabric/ Tackable	NJFF-3218-G	\$ 688.41	\$ 704.77 \$ 730.47 \$ 777.21 \$ 786.57 \$ 821.63
	24"(610mm)			NJFF-3224-G	744.72	765.76 796.14 852.22 866.26 906.00
	30"(762mm)			NJFF-3230-G	833.75	859.47 894.53 959.95 978.67 1023.09
	36"(914mm)			NJFF-3236-G	890.06	920.46 960.20 1034.96 1058.36 1107.46
	42"(1067mm)			NJFF-3242-G	946.37	981.45 1025.87 1109.97 1138.05 1191.83
	48"(1219mm)			NJFF-3248-G	1002.68	1042.44 1091.54 1184.98 1217.74 1276.20
	60"(1524mm)			NJFF-3260-G	1115.30	1164.42 1222.88 1335.00 1377.12 1444.94
32"(813mm)	18"(457mm)	Fabric/ Tackable	Fabric/Acous./ Tackable	NJFA-3218-G	\$ 711.78	\$ 728.14 \$ 753.84 \$ 800.58 \$ 809.94 \$ 845.00
	24"(610mm)			NJFA-3224-G	768.09	789.13 819.51 875.59 889.63 929.37
	30"(762mm)			NJFA-3230-G	857.12	882.84 917.90 983.32 1002.04 1046.46
	36"(914mm)			NJFA-3236-G	913.43	943.83 983.57 1058.33 1081.73 1130.83
	42"(1067mm)			NJFA-3242-G	969.74	1004.82 1049.24 1133.34 1161.42 1215.20
	48"(1219mm)			NJFA-3248-G	1026.05	1065.81 1114.91 1208.35 1241.11 1299.57
	60"(1524mm)			NJFA-3260-G	1138.67	1187.79 1246.25 1358.37 1400.49 1468.31
32"(813mm)	18"(457mm)	Fabric/Acous./ Tackable	Fabric/Acous./ Tackable	NJAA-3218-G	\$ 711.78	\$ 728.14 \$ 753.84 \$ 800.58 \$ 809.94 \$ 845.00
	24"(610mm)			NJAA-3224-G	768.09	789.13 819.51 875.59 889.63 929.37
	30"(762mm)			NJAA-3230-G	857.12	882.84 917.90 983.32 1002.04 1046.46
	36"(914mm)			NJAA-3236-G	913.43	943.83 983.57 1058.33 1081.73 1130.83
	42"(1067mm)			NJAA-3242-G	969.74	1004.82 1049.24 1133.34 1161.42 1215.20
	48"(1219mm)			NJAA-3248-G	1026.05	1065.81 1114.91 1208.35 1241.11 1299.57
	60"(1524mm)			NJAA-3260-G	1138.67	1187.79 1246.25 1358.37 1400.49 1468.31
32"(813mm)	24"(610mm)	Perforated	Perforated	NJHH-3224-G	\$1064.68	
	30"(762mm)			NJHH-3230-G	1192.19	
	36"(914mm)			NJHH-3236-G	1286.98	
	42"(1067mm)			NJHH-3242-G	1446.04	
	48"(1219mm)			NJHH-3248-G	1540.83	
	60"(1524mm)			NJHH-3260-G	1818.05	

List price shown is with non-powered base raceway.

Foundation Elements — Super Base Panel




































Grooved Top Cap

Height	Width	Side 1 Pad Surface	Side 2 Pad Surface	Number	①	Trim A Fabric Grade A	B	C	E	F	G
Wood Group A											
32"(813mm)	18"(457mm)	Fabric/ Tackable	Wood	NJFW-3218-G		\$ 885.76	\$ 893.94	\$ 906.79	\$ 930.16	\$ 934.84	\$ 952.37
	24"(610mm)			NJFW-3224-G		951.89	962.41	977.60	1005.64	1012.66	1032.53
	30"(762mm)			NJFW-3230-G		1050.74	1063.60	1081.13	1113.84	1123.20	1145.41
	36"(914mm)			NJFW-3236-G		1116.87	1132.07	1151.94	1189.32	1201.02	1225.57
	42"(1067mm)			NJFW-3242-G		1183.00	1200.54	1222.75	1264.80	1278.84	1305.73
	48"(1219mm)			NJFW-3248-G		1249.13	1269.01	1293.56	1340.28	1356.66	1385.89
	60"(1524mm)			NJFW-3260-G		1381.39	1405.95	1435.18	1491.24	1512.30	1546.21
Wood Group B											
32"(813mm)	18"(457mm)	Fabric/ Tackable	Wood	NJFW-3218-G		\$ 899.78	\$ 907.96	\$ 920.81	\$ 944.18	\$ 948.86	\$ 966.39
	24"(610mm)			NJFW-3224-G		968.24	978.76	993.95	1021.99	1029.01	1048.88
	30"(762mm)			NJFW-3230-G		1069.42	1082.28	1099.81	1132.52	1141.88	1164.09
	36"(914mm)			NJFW-3236-G		1137.88	1153.08	1172.95	1210.33	1222.03	1246.58
	42"(1067mm)			NJFW-3242-G		1206.34	1223.88	1246.09	1288.14	1302.18	1329.07
	48"(1219mm)			NJFW-3248-G		1274.80	1294.68	1319.23	1365.95	1382.33	1411.56
	60"(1524mm)			NJFW-3260-G		1411.72	1436.28	1465.51	1521.57	1542.63	1576.54
Wood Group A											
32"(813mm)	18"(457mm)	Fabric/Acoust./ Tackable	Wood	NJAW-3218-G		\$ 909.13	\$ 917.31	\$ 930.16	\$ 953.53	\$ 958.21	\$ 975.74
	24"(610mm)			NJAW-3224-G		975.26	985.78	1000.97	1029.01	1036.03	1055.90
	30"(762mm)			NJAW-3230-G		1074.11	1086.97	1104.50	1137.21	1146.57	1168.78
	36"(914mm)			NJAW-3236-G		1140.24	1155.44	1175.31	1212.69	1224.39	1248.94
	42"(1067mm)			NJAW-3242-G		1206.37	1223.91	1246.12	1288.17	1302.21	1329.10
	48"(1219mm)			NJAW-3248-G		1272.50	1292.38	1316.93	1363.65	1380.03	1409.26
	60"(1524mm)			NJAW-3260-G		1404.76	1429.32	1458.55	1514.61	1535.67	1569.58
Wood Group B											
32"(813mm)	18"(457mm)	Fabric/Acoust./ Tackable	Wood	NJAW-3218-G		\$ 923.15	\$ 931.33	\$ 944.18	\$ 967.55	\$ 972.23	\$ 989.76
	24"(610mm)			NJAW-3224-G		991.61	1002.13	1017.32	1045.36	1052.38	1072.25
	30"(762mm)			NJAW-3230-G		1092.79	1105.65	1123.18	1155.89	1165.25	1187.46
	36"(914mm)			NJAW-3236-G		1161.25	1176.45	1196.32	1233.70	1245.40	1269.95
	42"(1067mm)			NJAW-3242-G		1229.71	1247.25	1269.46	1311.51	1325.55	1352.44
	48"(1219mm)			NJAW-3248-G		1298.17	1318.05	1342.60	1389.32	1405.70	1434.93
	60"(1524mm)			NJAW-3260-G		1435.09	1459.65	1488.88	1544.94	1566.00	1599.91
						Wood Group A		Wood Group B			
32"(813mm)	18"(457mm)	Wood	Wood	NJWW-3218-G		\$1104.28		\$1132.32			
	24"(610mm)			NJWW-3224-G		1180.23		1212.93			
	30"(762mm)			NJWW-3230-G		1288.90		1326.26			
	36"(914mm)			NJWW-3236-G		1364.85		1406.87			
	42"(1067mm)			NJWW-3242-G		1440.80		1487.48			
	48"(1219mm)			NJWW-3248-G		1516.75		1568.09			
	60"(1524mm)			NJWW-3260-G		1756.29		1816.95			

List price shown is with non-powered base raceway.

Foundation Elements — Super Base Panel

Grooved Top Cap


Height	Width	Side 1 Pad Surface	Side 2 Pad Surface	Number	①	Trim B Fabric Grade		C	E	F	G
Wood Group A											
32"(813mm)	18"(457mm)	Fabric/ Tackable	Wood	NJFW-3218-G		\$ 906.93	\$ 915.11	\$ 927.96	\$ 951.33	\$ 956.01	\$ 973.54
	24"(610mm)			NJFW-3224-G		973.06	983.58	998.77	1026.81	1033.83	1053.70
	30"(762mm)			NJFW-3230-G		1071.91	1084.77	1102.30	1135.01	1144.37	1166.58
	36"(914mm)			NJFW-3236-G		1138.04	1153.24	1173.11	1210.49	1222.19	1246.74
	42"(1067mm)			NJFW-3242-G		1204.17	1221.71	1243.92	1285.97	1300.01	1326.90
	48"(1219mm)			NJFW-3248-G		1270.30	1290.18	1314.73	1361.45	1377.83	1407.06
	60"(1524mm)			NJFW-3260-G		1402.56	1427.12	1456.35	1512.41	1533.47	1567.38
Wood Group B											
32"(813mm)	18"(457mm)	Fabric/ Tackable	Wood	NJFW-3218-G		\$ 920.95	\$ 929.13	\$ 941.98	\$ 965.35	\$ 970.03	\$ 987.56
	24"(610mm)			NJFW-3224-G		989.41	999.93	1015.12	1043.16	1050.18	1070.05
	30"(762mm)			NJFW-3230-G		1090.59	1103.45	1120.98	1153.69	1163.05	1185.26
	36"(914mm)			NJFW-3236-G		1159.05	1174.25	1194.12	1231.50	1243.20	1267.75
	42"(1067mm)			NJFW-3242-G		1227.51	1245.05	1267.26	1309.31	1323.35	1350.24
	48"(1219mm)			NJFW-3248-G		1295.97	1315.85	1340.40	1387.12	1403.50	1432.73
	60"(1524mm)			NJFW-3260-G		1432.89	1457.45	1486.68	1542.74	1563.80	1597.71
Wood Group A											
32"(813mm)	18"(457mm)	Fabric/Acoust./ Tackable	Wood	NJAW-3218-G		\$ 930.30	\$ 938.48	\$ 951.33	\$ 974.70	\$ 979.38	\$ 996.91
	24"(610mm)			NJAW-3224-G		996.43	1006.95	1022.14	1050.18	1057.20	1077.07
	30"(762mm)			NJAW-3230-G		1095.28	1108.14	1125.67	1158.38	1167.74	1189.95
	36"(914mm)			NJAW-3236-G		1161.41	1176.61	1196.48	1233.86	1245.56	1270.11
	42"(1067mm)			NJAW-3242-G		1227.54	1245.08	1267.29	1309.34	1323.38	1350.27
	48"(1219mm)			NJAW-3248-G		1293.67	1313.55	1338.10	1384.82	1401.20	1430.43
	60"(1524mm)			NJAW-3260-G		1425.93	1450.49	1479.72	1535.78	1556.84	1590.75
Wood Group B											
32"(813mm)	18"(457mm)	Fabric/Acoust./ Tackable	Wood	NJAW-3218-G		\$ 944.32	\$ 952.50	\$ 965.35	\$ 988.72	\$ 993.40	\$1010.93
	24"(610mm)			NJAW-3224-G		1012.78	1023.30	1038.49	1066.53	1073.55	1093.42
	30"(762mm)			NJAW-3230-G		1113.96	1126.82	1144.35	1177.06	1186.42	1208.63
	36"(914mm)			NJAW-3236-G		1182.42	1197.62	1217.49	1254.87	1266.57	1291.12
	42"(1067mm)			NJAW-3242-G		1250.88	1268.42	1290.63	1332.68	1346.72	1373.61
	48"(1219mm)			NJAW-3248-G		1319.34	1339.22	1363.77	1410.49	1426.87	1456.10
	60"(1524mm)			NJAW-3260-G		1456.26	1480.82	1510.05	1566.11	1587.17	1621.08
						Wood Group A	Wood Group B				
32"(813mm)	18"(457mm)	Wood	Wood	NJWW-3218-G		\$1125.45		\$1153.49			
	24"(610mm)			NJWW-3224-G		1201.40		1234.10			
	30"(762mm)			NJWW-3230-G		1310.07		1347.43			
	36"(914mm)			NJWW-3236-G		1386.02		1428.04			
	42"(1067mm)			NJWW-3242-G		1461.97		1508.65			
	48"(1219mm)			NJWW-3248-G		1537.92		1589.26			
	60"(1524mm)			NJWW-3260-G		1777.46		1838.12			

List price shown is with non-powered base raceway.


This page intentionally blank

Foundation Elements — Super Base Panel


Wood Top Cap



NJ-WN
(Non-Powered)



NJ-WA
(Open Base)



NJ-WP
(3-Circuit Powered)



NOTES:

18" (457mm) wide panels are non-powered only. Specify extended power connectors to continue power through 18" (457mm) panels.

18" (457mm) wide perforated panels are not available.

Receptacle ports on the raceway cover measure 2" (51mm) top-to-bottom and 4 3/4" (121mm) side-to-side.

Powered panels with raceway covers ship with receptacle ports in the **base** raceway cover. Non-powered panels ship without receptacle ports in the **base** raceway cover. Powered panels with PDA but without raceway covers require separately specified base raceway covers for power and communication port locations other than the standard powered base raceway cover.

New York City (NYC) electrical applications require field installation of Power Distribution Assemblies (PDA). See Power Specifications on this page for details.

New York Port Authority (NYPA) electrical applications require metal raceway covers. See Power Specifications on this page for details.

When specifying stackable panels with wood pads, an unmatched vertical wood grain and natural variations in wood grain and color can be expected between pads. If a consistent look is desired, specify Matching Wood Pad Sets.

Some building codes may restrict the use of panel heights greater than 69" (1753mm). Consult your local code authority to assure that the furniture layout is compliant prior to installation.

Features

- **Non-powered and powered panels** include a panel core, panel locks, two pads with pad attachment brackets, vertical cable guide, wood top cap, with or without one-piece raceway cover; power distribution assembly/flex connector(s) when power is specified.
- **Open base panels** include a panel core, panel locks, two pads with pad attachment brackets, and wood top cap.
- Pads are field-removable for access to cabling or pad replacement.
- Pad options include: painted, fabric/tackable, fabric/acoustical/tackable, perforated, and wood.
- Panel surfaces may have the same fabric on both sides or a different fabric on each side.
- Assembled panel thickness is 3" (76mm).
- The base raceway is 6 3/4" (171mm) high. For cabling capacities, see the Power and Cable Management Section for details.
- Powered panels are available for countries that utilize 120 volt 60 hertz electrical systems and U.S. configured plugs and outlets.
- Ships with unassembled pads, top cap and base raceway cover (if applicable).

Specification Tips

- Connectors are required to create panel runs and intersections; specify separately.
- Super base panel will accept upper structure elements up to 120" (3048mm).
- Flex connectors provided for powered super base panels accommodate straight in-line, inside 90°, and inside 120° conditions (if applicable). See price list pages for additional flex connector applications.
- Powered panels will only accept triplex receptacles; specify separately.
- Due to the aesthetic properties of the perforated surface material, it is not recommended to route cables behind pads.
- Open base is not available with power or base raceway cover.
- Use extended power connectors to pass through 18" (457mm) or 24" (610mm) non-powered panel.
- Base raceway is 6 3/4" (171mm) high for all power options.
- Do not mix 3-circuit with 4-circuit components. Do not mix 2+2 and 3+1 components. Components have unique polarity key and color coding.
- 3-circuit and 4-circuit power options include power distribution assembly, flex connector and powered raceway cover.
- New York City (NYC) and New York Port Authority (NYPA) electrical applications require field installation of Power Distribution Assembly (PDA).
- Hardwire option includes powered raceway cover only. Separately specify hardwire electrical kit for base raceway.
- Raceway cover needs to be separately specified for no raceway cover option.

To Order, Specify:

- 1) Product number, including:

1 Base Option:

- N** Non-Powered
- M** Non-Powered, NYPA, add **\$108.68** list
- A** Open Base

3-Circuit: 24"-60" wide

- P** 3-Circuit, add **\$198.64** list
- Y** 3-Circuit – NYC, add **\$177.61** list
- R** 3-Circuit – NYPA, add **\$286.29** list
- E** 3-Circuit – No raceway cover option with PDA, add **\$191.63** list
- C** Hardwire with raceway

4-Circuit: 24"-60" wide

- 2** 4-Circuit – 2+2, add **\$206.83** list
- W** 4-Circuit – 2+2 NYC, add **\$185.80** list
- T** 4-Circuit – 2+2 NYPA, add **\$294.48** list
- H** 4-Circuit – 2+2 no raceway cover option with PDA, add **\$199.82** list
- 4** 4-Circuit – 3+1, add **\$206.83** list
- V** 4-Circuit – 3+1 NYC, add **\$185.80** list
- S** 4-Circuit – 3+1 NYPA, add **\$294.48** list
- D** 4-Circuit – 3+1 no raceway cover option with PDA, add **\$199.82** list

- 2) Painted, fabric/colorway, or wood finish for side one.*
- 3) Painted, fabric/colorway, or wood finish for side two.*
- 4) Trim color for base raceway cover (if applicable).*
- 5) Wood finish for top cap.

*Note: Upcharge for mixed grade fabric or trim surfaces, refer to the electronic catalog for pricing.

Foundation Elements — Super Base Panel

Wood Top Cap

Height	Width	Side 1 Pad Surface	Side 2 Pad Surface	Number ①	Trim A	Wood Group A – Trim A					
						Fabric Grade A	B	C	E	F	G
32"(813mm)	18"(457mm)	Painted	Painted	NJPP-3218-W	\$ 717.49						
	24"(610mm)			NJPP-3224-W	794.61						
	30"(762mm)			NJPP-3230-W	904.45						
	36"(914mm)			NJPP-3236-W	981.57						
	42"(1067mm)			NJPP-3242-W	1058.69						
	48"(1219mm)			NJPP-3248-W	1135.81						
	60"(1524mm)			NJPP-3260-W	1377.69						
32"(813mm)	18"(457mm)	Painted	Fabric/ Tackable	NJPF-3218-W		\$ 746.12	\$ 754.30	\$ 767.15	\$ 790.52	\$ 795.20	\$ 812.73
	24"(610mm)			NJPF-3224-W		826.86	837.38	852.57	880.61	887.63	907.50
	30"(762mm)			NJPF-3230-W		940.32	953.18	970.71	1003.42	1012.78	1034.99
	36"(914mm)			NJPF-3236-W		1021.06	1036.26	1056.13	1093.51	1105.21	1129.76
	42"(1067mm)			NJPF-3242-W		1101.80	1119.34	1141.55	1183.60	1197.64	1224.53
	48"(1219mm)			NJPF-3248-W		1182.54	1202.42	1226.97	1273.69	1290.07	1319.30
	60"(1524mm)			NJPF-3260-W		1344.02	1368.58	1397.81	1453.87	1474.93	1508.84
32"(813mm)	18"(457mm)	Painted	Fabric/Acous./ Tackable	NJPA-3218-W		\$ 769.49	\$ 777.67	\$ 790.52	\$ 813.89	\$ 818.57	\$ 836.10
	24"(610mm)			NJPA-3224-W		850.23	860.75	875.94	903.98	911.00	930.87
	30"(762mm)			NJPA-3230-W		963.69	976.55	994.08	1026.79	1036.15	1058.36
	36"(914mm)			NJPA-3236-W		1044.43	1059.63	1079.50	1116.88	1128.58	1153.13
	42"(1067mm)			NJPA-3242-W		1125.17	1142.71	1164.92	1206.97	1221.01	1247.90
	48"(1219mm)			NJPA-3248-W		1205.91	1225.79	1250.34	1297.06	1313.44	1342.67
	60"(1524mm)			NJPA-3260-W		1367.39	1391.95	1421.18	1477.24	1498.30	1532.21
32"(813mm)	18"(457mm)	Fabric/ Tackable	Fabric/ Tackable	NJFF-3218-W		\$ 774.75	\$ 791.11	\$ 816.81	\$ 863.55	\$ 872.91	\$ 907.97
	24"(610mm)			NJFF-3224-W		859.11	880.15	910.53	966.61	980.65	1020.39
	30"(762mm)			NJFF-3230-W		976.19	1001.91	1036.97	1102.39	1121.11	1165.53
	36"(914mm)			NJFF-3236-W		1060.55	1090.95	1130.69	1205.45	1228.85	1277.95
	42"(1067mm)			NJFF-3242-W		1144.91	1179.99	1224.41	1308.51	1336.59	1390.37
	48"(1219mm)			NJFF-3248-W		1229.27	1269.03	1318.13	1411.57	1444.33	1502.79
	60"(1524mm)			NJFF-3260-W		1397.99	1447.11	1505.57	1617.69	1659.81	1727.63
32"(813mm)	18"(457mm)	Fabric/ Tackable	Fabric/Acous./ Tackable	NJFA-3218-W		\$ 798.12	\$ 814.48	\$ 840.18	\$ 886.92	\$ 896.28	\$ 931.34
	24"(610mm)			NJFA-3224-W		882.48	903.52	933.90	989.98	1004.02	1043.76
	30"(762mm)			NJFA-3230-W		999.56	1025.28	1060.34	1125.76	1144.48	1188.90
	36"(914mm)			NJFA-3236-W		1083.92	1114.32	1154.06	1228.82	1252.22	1301.32
	42"(1067mm)			NJFA-3242-W		1168.28	1203.36	1247.78	1331.88	1359.96	1413.74
	48"(1219mm)			NJFA-3248-W		1252.64	1292.40	1341.50	1434.94	1467.70	1526.16
	60"(1524mm)			NJFA-3260-W		1421.36	1470.48	1528.94	1641.06	1683.18	1751.00
32"(813mm)	18"(457mm)	Fabric/Acous./ Tackable	Fabric/Acous./ Tackable	NJAA-3218-W		\$ 798.12	\$ 814.48	\$ 840.18	\$ 886.92	\$ 896.28	\$ 931.34
	24"(610mm)			NJAA-3224-W		882.48	903.52	933.90	989.98	1004.02	1043.76
	30"(762mm)			NJAA-3230-W		999.56	1025.28	1060.34	1125.76	1144.48	1188.90
	36"(914mm)			NJAA-3236-W		1083.92	1114.32	1154.06	1228.82	1252.22	1301.32
	42"(1067mm)			NJAA-3242-W		1168.28	1203.36	1247.78	1331.88	1359.96	1413.74
	48"(1219mm)			NJAA-3248-W		1252.64	1292.40	1341.50	1434.94	1467.70	1526.16
	60"(1524mm)			NJAA-3260-W		1421.36	1470.48	1528.94	1641.06	1683.18	1751.00
32"(813mm)	24"(610mm)	Perforated	Perforated	NJHH-3224-W	\$1138.15						
	30"(762mm)			NJHH-3230-W	1287.71						
	36"(914mm)			NJHH-3236-W	1404.55						
	42"(1067mm)			NJHH-3242-W	1585.66						
	48"(1219mm)			NJHH-3248-W	1702.50						
	60"(1524mm)			NJHH-3260-W	2023.82						

List price shown is with non-powered base raceway.

Foundation Elements — Super Base Panel

Wood Top Cap

Height	Width	Side 1 Pad Surface	Side 2 Pad Surface	Number ①	Trim B	Wood Group A – Trim B					
						Fabric Grade A	B	C	E	F	G
32"(813mm)	18"(457mm)	Painted	Painted	NJPP-3218-W	\$ 766.84						
	24"(610mm)			NJPP-3224-W	849.96						
	30"(762mm)			NJPP-3230-W	965.80						
	36"(914mm)			NJPP-3236-W	1048.92						
	42"(1067mm)			NJPP-3242-W	1132.04						
	48"(1219mm)			NJPP-3248-W	1215.16						
	60"(1524mm)			NJPP-3260-W	1469.04						
32"(813mm)	18"(457mm)	Painted	Fabric/ Tackable	NJPF-3218-W		\$ 778.01	\$ 786.19	\$ 799.04	\$ 822.41	\$ 827.09	\$ 844.62
	24"(610mm)			NJPF-3224-W		859.92	870.44	885.63	913.67	920.69	940.56
	30"(762mm)			NJPF-3230-W		974.55	987.41	1004.94	1037.65	1047.01	1069.22
	36"(914mm)			NJPF-3236-W		1056.46	1071.66	1091.53	1128.91	1140.61	1165.16
	42"(1067mm)			NJPF-3242-W		1138.37	1155.91	1178.12	1220.17	1234.21	1261.10
	48"(1219mm)			NJPF-3248-W		1220.28	1240.16	1264.71	1311.43	1327.81	1357.04
	60"(1524mm)			NJPF-3260-W		1384.10	1408.66	1437.89	1493.95	1515.01	1548.92
32"(813mm)	18"(457mm)	Painted	Fabric/Acous./ Tackable	NJPA-3218-W		\$ 801.38	\$ 809.56	\$ 822.41	\$ 845.78	\$ 850.46	\$ 867.99
	24"(610mm)			NJPA-3224-W		883.29	893.81	909.00	937.04	944.06	963.93
	30"(762mm)			NJPA-3230-W		997.92	1010.78	1028.31	1061.02	1070.38	1092.59
	36"(914mm)			NJPA-3236-W		1079.83	1095.03	1114.90	1152.28	1163.98	1188.53
	42"(1067mm)			NJPA-3242-W		1161.74	1179.28	1201.49	1243.54	1257.58	1284.47
	48"(1219mm)			NJPA-3248-W		1243.65	1263.53	1288.08	1334.80	1351.18	1380.41
	60"(1524mm)			NJPA-3260-W		1407.47	1432.03	1461.26	1517.32	1538.38	1572.29
32"(813mm)	18"(457mm)	Fabric/ Tackable	Fabric/ Tackable	NJFF-3218-W		\$ 789.18	\$ 805.54	\$ 831.24	\$ 877.98	\$ 887.34	\$ 922.40
	24"(610mm)			NJFF-3224-W		873.54	894.58	924.96	981.04	995.08	1034.82
	30"(762mm)			NJFF-3230-W		990.62	1016.34	1051.40	1116.82	1135.54	1179.96
	36"(914mm)			NJFF-3236-W		1074.98	1105.38	1145.12	1219.88	1243.28	1292.38
	42"(1067mm)			NJFF-3242-W		1159.34	1194.42	1238.84	1322.94	1351.02	1404.80
	48"(1219mm)			NJFF-3248-W		1243.70	1283.46	1332.56	1426.00	1458.76	1517.22
	60"(1524mm)			NJFF-3260-W		1412.42	1461.54	1520.00	1632.12	1674.24	1742.06
32"(813mm)	18"(457mm)	Fabric/ Tackable	Fabric/Acous./ Tackable	NJFA-3218-W		\$ 812.55	\$ 828.91	\$ 854.61	\$ 901.35	\$ 910.71	\$ 945.77
	24"(610mm)			NJFA-3224-W		896.91	917.95	948.33	1004.41	1018.45	1058.19
	30"(762mm)			NJFA-3230-W		1013.99	1039.71	1074.77	1140.19	1158.91	1203.33
	36"(914mm)			NJFA-3236-W		1098.35	1128.75	1168.49	1243.25	1266.65	1315.75
	42"(1067mm)			NJFA-3242-W		1182.71	1217.79	1262.21	1346.31	1374.39	1428.17
	48"(1219mm)			NJFA-3248-W		1267.07	1306.83	1355.93	1449.37	1482.13	1540.59
	60"(1524mm)			NJFA-3260-W		1435.79	1484.91	1543.37	1655.49	1697.61	1765.43
32"(813mm)	18"(457mm)	Fabric/Acous./ Tackable	Fabric/Acous./ Tackable	NJAA-3218-W		\$ 812.55	\$ 828.91	\$ 854.61	\$ 901.35	\$ 910.71	\$ 945.77
	24"(610mm)			NJAA-3224-W		896.91	917.95	948.33	1004.41	1018.45	1058.19
	30"(762mm)			NJAA-3230-W		1013.99	1039.71	1074.77	1140.19	1158.91	1203.33
	36"(914mm)			NJAA-3236-W		1098.35	1128.75	1168.49	1243.25	1266.65	1315.75
	42"(1067mm)			NJAA-3242-W		1182.71	1217.79	1262.21	1346.31	1374.39	1428.17
	48"(1219mm)			NJAA-3248-W		1267.07	1306.83	1355.93	1449.37	1482.13	1540.59
	60"(1524mm)			NJAA-3260-W		1435.79	1484.91	1543.37	1655.49	1697.61	1765.43
32"(813mm)	24"(610mm)	Perforated	Perforated	NJHH-3224-W	\$1193.50						
	30"(762mm)			NJHH-3230-W	1349.06						
	36"(914mm)			NJHH-3236-W	1471.90						
	42"(1067mm)			NJHH-3242-W	1659.01						
	48"(1219mm)			NJHH-3248-W	1781.85						
	60"(1524mm)			NJHH-3260-W	2115.17						

List price shown is with non-powered base raceway.

Foundation Elements — Super Base Panel

Wood Top Cap

Height	Width	Side 1 Pad Surface	Side 2 Pad Surface	Number ①	Trim A	Wood Group B – Trim A					
						Fabric Grade A	B	C	E	F	G
32"(813mm)	18"(457mm)	Painted	Painted	NJPP-3218-W	\$ 731.51						
	24"(610mm)			NJPP-3224-W	810.96						
	30"(762mm)			NJPP-3230-W	923.13						
	36"(914mm)			NJPP-3236-W	1002.58						
	42"(1067mm)			NJPP-3242-W	1082.03						
	48"(1219mm)			NJPP-3248-W	1161.48						
	60"(1524mm)			NJPP-3260-W	1408.02						
32"(813mm)	18"(457mm)	Painted	Fabric/ Tackable	NJPF-3218-W		\$ 760.14	\$ 768.32	\$ 781.17	\$ 804.54	\$ 809.22	\$ 826.75
	24"(610mm)			NJPF-3224-W		843.21	853.73	868.92	896.96	903.98	923.85
	30"(762mm)			NJPF-3230-W		959.00	971.86	989.39	1022.10	1031.46	1053.67
	36"(914mm)			NJPF-3236-W		1042.07	1057.27	1077.14	1114.52	1126.22	1150.77
	42"(1067mm)			NJPF-3242-W		1125.14	1142.68	1164.89	1206.94	1220.98	1247.87
	48"(1219mm)			NJPF-3248-W		1208.21	1228.09	1252.64	1299.36	1315.74	1344.97
	60"(1524mm)			NJPF-3260-W		1374.35	1398.91	1428.14	1484.20	1505.26	1539.17
32"(813mm)	18"(457mm)	Painted	Fabric/Acous./ Tackable	NJPA-3218-W		\$ 783.51	\$ 791.69	\$ 804.54	\$ 827.91	\$ 832.59	\$ 850.12
	24"(610mm)			NJPA-3224-W		866.58	877.10	892.29	920.33	927.35	947.22
	30"(762mm)			NJPA-3230-W		982.37	995.23	1012.76	1045.47	1054.83	1077.04
	36"(914mm)			NJPA-3236-W		1065.44	1080.64	1100.51	1137.89	1149.59	1174.14
	42"(1067mm)			NJPA-3242-W		1148.51	1166.05	1188.26	1230.31	1244.35	1271.24
	48"(1219mm)			NJPA-3248-W		1231.58	1251.46	1276.01	1322.73	1339.11	1368.34
	60"(1524mm)			NJPA-3260-W		1397.72	1422.28	1451.51	1507.57	1528.63	1562.54
32"(813mm)	18"(457mm)	Fabric/ Tackable	Fabric/ Tackable	NJFF-3218-W		\$ 788.77	\$ 805.13	\$ 830.83	\$ 877.57	\$ 886.93	\$ 921.99
	24"(610mm)			NJFF-3224-W		875.46	896.50	926.88	982.96	997.00	1036.74
	30"(762mm)			NJFF-3230-W		994.87	1020.59	1055.65	1121.07	1139.79	1184.21
	36"(914mm)			NJFF-3236-W		1081.56	1111.96	1151.70	1226.46	1249.86	1298.96
	42"(1067mm)			NJFF-3242-W		1168.25	1203.33	1247.75	1331.85	1359.93	1413.71
	48"(1219mm)			NJFF-3248-W		1254.94	1294.70	1343.80	1437.24	1470.00	1528.46
	60"(1524mm)			NJFF-3260-W		1428.32	1477.44	1535.90	1648.02	1690.14	1757.96
32"(813mm)	18"(457mm)	Fabric/ Tackable	Fabric/Acous./ Tackable	NJFA-3218-W		\$ 812.14	\$ 828.50	\$ 854.20	\$ 900.94	\$ 910.30	\$ 945.36
	24"(610mm)			NJFA-3224-W		898.83	919.87	950.25	1006.33	1020.37	1060.11
	30"(762mm)			NJFA-3230-W		1018.24	1043.96	1079.02	1144.44	1163.16	1207.58
	36"(914mm)			NJFA-3236-W		1104.93	1135.33	1175.07	1249.83	1273.23	1322.33
	42"(1067mm)			NJFA-3242-W		1191.62	1226.70	1271.12	1355.22	1383.30	1437.08
	48"(1219mm)			NJFA-3248-W		1278.31	1318.07	1367.17	1460.61	1493.37	1551.83
	60"(1524mm)			NJFA-3260-W		1451.69	1500.81	1559.27	1671.39	1713.51	1781.33
32"(813mm)	18"(457mm)	Fabric/Acous./ Tackable	Fabric/Acous./ Tackable	NJAA-3218-W		\$ 812.14	\$ 828.50	\$ 854.20	\$ 900.94	\$ 910.30	\$ 945.36
	24"(610mm)			NJAA-3224-W		898.83	919.87	950.25	1006.33	1020.37	1060.11
	30"(762mm)			NJAA-3230-W		1018.24	1043.96	1079.02	1144.44	1163.16	1207.58
	36"(914mm)			NJAA-3236-W		1104.93	1135.33	1175.07	1249.83	1273.23	1322.33
	42"(1067mm)			NJAA-3242-W		1191.62	1226.70	1271.12	1355.22	1383.30	1437.08
	48"(1219mm)			NJAA-3248-W		1278.31	1318.07	1367.17	1460.61	1493.37	1551.83
	60"(1524mm)			NJAA-3260-W		1451.69	1500.81	1559.27	1671.39	1713.51	1781.33
32"(813mm)	24"(610mm)	Perforated	Perforated	NJHH-3224-W	\$1154.50						
	30"(762mm)			NJHH-3230-W	1306.39						
	36"(914mm)			NJHH-3236-W	1425.56						
	42"(1067mm)			NJHH-3242-W	1609.00						
	48"(1219mm)			NJHH-3248-W	1728.17						
	60"(1524mm)			NJHH-3260-W	2054.15						

List price shown is with non-powered base raceway.

Foundation Elements — Super Base Panel

Wood Top Cap

Height	Width	Side 1 Pad Surface	Side 2 Pad Surface	Number ①	Trim B	Wood Group B – Trim B Fabric Grade					
						A	B	C	E	F	G
32"(813mm)	18"(457mm)	Painted	Painted	NJPP-3218-W	\$ 780.86						
	24"(610mm)			NJPP-3224-W	866.31						
	30"(762mm)			NJPP-3230-W	984.48						
	36"(914mm)			NJPP-3236-W	1069.93						
	42"(1067mm)			NJPP-3242-W	1155.38						
	48"(1219mm)			NJPP-3248-W	1240.83						
	60"(1524mm)			NJPP-3260-W	1499.37						
32"(813mm)	18"(457mm)	Painted	Fabric/ Tackable	NJPF-3218-W		\$ 792.03	\$ 800.21	\$ 813.06	\$ 836.43	\$ 841.11	\$ 858.64
	24"(610mm)			NJPF-3224-W		876.27	886.79	901.98	930.02	937.04	956.91
	30"(762mm)			NJPF-3230-W		993.23	1006.09	1023.62	1056.33	1065.69	1087.90
	36"(914mm)			NJPF-3236-W		1077.47	1092.67	1112.54	1149.92	1161.62	1186.17
	42"(1067mm)			NJPF-3242-W		1161.71	1179.25	1201.46	1243.51	1257.55	1284.44
	48"(1219mm)			NJPF-3248-W		1245.95	1265.83	1290.38	1337.10	1353.48	1382.71
	60"(1524mm)			NJPF-3260-W		1414.43	1438.99	1468.22	1524.28	1545.34	1579.25
32"(813mm)	18"(457mm)	Painted	Fabric/Acous./ Tackable	NJPA-3218-W		\$ 815.40	\$ 823.58	\$ 836.43	\$ 859.80	\$ 864.48	\$ 882.01
	24"(610mm)			NJPA-3224-W		899.64	910.16	925.35	953.39	960.41	980.28
	30"(762mm)			NJPA-3230-W		1016.60	1029.46	1046.99	1079.70	1089.06	1111.27
	36"(914mm)			NJPA-3236-W		1100.84	1116.04	1135.91	1173.29	1184.99	1209.54
	42"(1067mm)			NJPA-3242-W		1185.08	1202.62	1224.83	1266.88	1280.92	1307.81
	48"(1219mm)			NJPA-3248-W		1269.32	1289.20	1313.75	1360.47	1376.85	1406.08
	60"(1524mm)			NJPA-3260-W		1437.80	1462.36	1491.59	1547.65	1568.71	1602.62
32"(813mm)	18"(457mm)	Fabric/ Tackable	Fabric/ Tackable	NJFF-3218-W		\$ 803.20	\$ 819.56	\$ 845.26	\$ 892.00	\$ 901.36	\$ 936.42
	24"(610mm)			NJFF-3224-W		889.89	910.93	941.31	997.39	1011.43	1051.17
	30"(762mm)			NJFF-3230-W		1009.30	1035.02	1070.08	1135.50	1154.22	1198.64
	36"(914mm)			NJFF-3236-W		1095.99	1126.39	1166.13	1240.89	1264.29	1313.39
	42"(1067mm)			NJFF-3242-W		1182.68	1217.76	1262.18	1346.28	1374.36	1428.14
	48"(1219mm)			NJFF-3248-W		1269.37	1309.13	1358.23	1451.67	1484.43	1542.89
	60"(1524mm)			NJFF-3260-W		1442.75	1491.87	1550.33	1662.45	1704.57	1772.39
32"(813mm)	18"(457mm)	Fabric/ Tackable	Fabric/Acous./ Tackable	NJFA-3218-W		\$ 826.57	\$ 842.93	\$ 868.63	\$ 915.37	\$ 924.73	\$ 959.79
	24"(610mm)			NJFA-3224-W		913.26	934.30	964.68	1020.76	1034.80	1074.54
	30"(762mm)			NJFA-3230-W		1032.67	1058.39	1093.45	1158.87	1177.59	1222.01
	36"(914mm)			NJFA-3236-W		1119.36	1149.76	1189.50	1264.26	1287.66	1336.76
	42"(1067mm)			NJFA-3242-W		1206.05	1241.13	1285.55	1369.65	1397.73	1451.51
	48"(1219mm)			NJFA-3248-W		1292.74	1332.50	1381.60	1475.04	1507.80	1566.26
	60"(1524mm)			NJFA-3260-W		1466.12	1515.24	1573.70	1685.82	1727.94	1795.76
32"(813mm)	18"(457mm)	Fabric/Acous./ Tackable	Fabric/Acous./ Tackable	NJAA-3218-W		\$ 826.57	\$ 842.93	\$ 868.63	\$ 915.37	\$ 924.73	\$ 959.79
	24"(610mm)			NJAA-3224-W		913.26	934.30	964.68	1020.76	1034.80	1074.54
	30"(762mm)			NJAA-3230-W		1032.67	1058.39	1093.45	1158.87	1177.59	1222.01
	36"(914mm)			NJAA-3236-W		1119.36	1149.76	1189.50	1264.26	1287.66	1336.76
	42"(1067mm)			NJAA-3242-W		1206.05	1241.13	1285.55	1369.65	1397.73	1451.51
	48"(1219mm)			NJAA-3248-W		1292.74	1332.50	1381.60	1475.04	1507.80	1566.26
	60"(1524mm)			NJAA-3260-W		1466.12	1515.24	1573.70	1685.82	1727.94	1795.76
32"(813mm)	24"(610mm)	Perforated	Perforated	NJHH-3224-W	\$1209.85						
	30"(762mm)			NJHH-3230-W	1367.74						
	36"(914mm)			NJHH-3236-W	1492.91						
	42"(1067mm)			NJHH-3242-W	1682.35						
	48"(1219mm)			NJHH-3248-W	1807.52						
	60"(1524mm)			NJHH-3260-W	2145.50						

List price shown is with non-powered base raceway.

Foundation Elements — Super Base Panel




































Wood Top Cap

Height	Width	Side 1 Pad Surface	Side 2 Pad Surface	Number ①	Trim A Fabric Grade A	B	C	E	F	G
Wood Group A										
32"(813mm)	18"(457mm)	Fabric/ Tackable	Wood	NJFW-3218-W	\$ 993.27	\$1001.45	\$1014.30	\$1037.67	\$1042.35	\$1059.88
	24"(610mm)			NJFW-3224-W	1087.45	1097.97	1113.16	1141.20	1148.22	1168.09
	30"(762mm)			NJFW-3230-W	1214.35	1227.21	1244.74	1277.45	1286.81	1309.02
	36"(914mm)			NJFW-3236-W	1308.53	1323.73	1343.60	1380.98	1392.68	1417.23
	42"(1067mm)			NJFW-3242-W	1402.71	1420.25	1442.46	1484.51	1498.55	1525.44
	48"(1219mm)			NJFW-3248-W	1496.89	1516.77	1541.32	1588.04	1604.42	1633.65
	60"(1524mm)			NJFW-3260-W	1685.25	1709.81	1739.04	1795.10	1816.16	1850.07
Wood Group B										
32"(813mm)	18"(457mm)	Fabric/ Tackable	Wood	NJFW-3218-W	\$1021.31	\$1029.49	\$1042.34	\$1065.71	\$1070.39	\$1087.92
	24"(610mm)			NJFW-3224-W	1120.15	1130.67	1145.86	1173.90	1180.92	1200.79
	30"(762mm)			NJFW-3230-W	1251.71	1264.57	1282.10	1314.81	1324.17	1346.38
	36"(914mm)			NJFW-3236-W	1350.55	1365.75	1385.62	1423.00	1434.70	1459.25
	42"(1067mm)			NJFW-3242-W	1449.39	1466.93	1489.14	1531.19	1545.23	1572.12
	48"(1219mm)			NJFW-3248-W	1548.23	1568.11	1592.66	1639.38	1655.76	1684.99
	60"(1524mm)			NJFW-3260-W	1745.91	1770.47	1799.70	1855.76	1876.82	1910.73
Wood Group A										
32"(813mm)	18"(457mm)	Fabric/Acous./ Tackable	Wood	NJAW-3218-W	\$1016.64	\$1024.82	\$1037.67	\$1061.04	\$1065.72	\$1083.25
	24"(610mm)			NJAW-3224-W	1110.82	1121.34	1136.53	1164.57	1171.59	1191.46
	30"(762mm)			NJAW-3230-W	1237.72	1250.58	1268.11	1300.82	1310.18	1332.39
	36"(914mm)			NJAW-3236-W	1331.90	1347.10	1366.97	1404.35	1416.05	1440.60
	42"(1067mm)			NJAW-3242-W	1426.08	1443.62	1465.83	1507.88	1521.92	1548.81
	48"(1219mm)			NJAW-3248-W	1520.26	1540.14	1564.69	1611.41	1627.79	1657.02
	60"(1524mm)			NJAW-3260-W	1708.62	1733.18	1762.41	1818.47	1839.53	1873.44
Wood Group B										
32"(813mm)	18"(457mm)	Fabric/Acous./ Tackable	Wood	NJAW-3218-W	\$1044.68	\$1052.86	\$1065.71	\$1089.08	\$1093.76	\$1111.29
	24"(610mm)			NJAW-3224-W	1143.52	1154.04	1169.23	1197.27	1204.29	1224.16
	30"(762mm)			NJAW-3230-W	1275.08	1287.94	1305.47	1338.18	1347.54	1369.75
	36"(914mm)			NJAW-3236-W	1373.92	1389.12	1408.99	1446.37	1458.07	1482.62
	42"(1067mm)			NJAW-3242-W	1472.76	1490.30	1512.51	1554.56	1568.60	1595.49
	48"(1219mm)			NJAW-3248-W	1571.60	1591.48	1616.03	1662.75	1679.13	1708.36
	60"(1524mm)			NJAW-3260-W	1769.28	1793.84	1823.07	1879.13	1900.19	1934.10
					Wood Group A		Wood Group B			
32"(813mm)	18"(457mm)	Wood	Wood	NJWW-3218-W	\$1211.79		\$1253.85			
	24"(610mm)			NJWW-3224-W	1315.79		1364.84			
	30"(762mm)			NJWW-3230-W	1452.51		1508.55			
	36"(914mm)			NJWW-3236-W	1556.51		1619.54			
	42"(1067mm)			NJWW-3242-W	1660.51		1730.53			
	48"(1219mm)			NJWW-3248-W	1764.51		1841.52			
	60"(1524mm)			NJWW-3260-W	2060.15		2151.14			

List price shown is with non-powered base raceway.

Foundation Elements — Super Base Panel

Wood Top Cap


Height	Width	Side 1 Pad Surface	Side 2 Pad Surface	Number ①	Trim B Fabric Grade		C	E	F	G
Wood Group A										
32"(813mm)	18"(457mm)	Fabric/ Tackable	Wood	NJFW-3218-W 	\$1007.70	\$1015.88	\$1028.73	\$1052.10	\$1056.78	\$1074.31
	24"(610mm)			NJFW-3224-W 	1101.88	1112.40	1127.59	1155.63	1162.65	1182.52
	30"(762mm)			NJFW-3230-W 	1228.78	1241.64	1259.17	1291.88	1301.24	1323.45
	36"(914mm)			NJFW-3236-W 	1322.96	1338.16	1358.03	1395.41	1407.11	1431.66
	42"(1067mm)			NJFW-3242-W 	1417.14	1434.68	1456.89	1498.94	1512.98	1539.87
	48"(1219mm)			NJFW-3248-W 	1511.32	1531.20	1555.75	1602.47	1618.85	1648.08
	60"(1524mm)			NJFW-3260-W 	1699.68	1724.24	1753.47	1809.53	1830.59	1864.50
Wood Group B										
32"(813mm)	18"(457mm)	Fabric/ Tackable	Wood	NJFW-3218-W 	\$1035.74	\$1043.92	\$1056.77	\$1080.14	\$1084.82	\$1102.35
	24"(610mm)			NJFW-3224-W 	1134.58	1145.10	1160.29	1188.33	1195.35	1215.22
	30"(762mm)			NJFW-3230-W 	1266.14	1279.00	1296.53	1329.24	1338.60	1360.81
	36"(914mm)			NJFW-3236-W 	1364.98	1380.18	1400.05	1437.43	1449.13	1473.68
	42"(1067mm)			NJFW-3242-W 	1463.82	1481.36	1503.57	1545.62	1559.66	1586.55
	48"(1219mm)			NJFW-3248-W 	1562.66	1582.54	1607.09	1653.81	1670.19	1699.42
	60"(1524mm)			NJFW-3260-W 	1760.34	1784.90	1814.13	1870.19	1891.25	1925.16
Wood Group A										
32"(813mm)	18"(457mm)	Fabric/Acous./ Tackable	Wood	NJAW-3218-W 	\$1031.07	\$1039.25	\$1052.10	\$1075.47	\$1080.15	\$1097.68
	24"(610mm)			NJAW-3224-W 	1125.25	1135.77	1150.96	1179.00	1186.02	1205.89
	30"(762mm)			NJAW-3230-W 	1252.15	1265.01	1282.54	1315.25	1324.61	1346.82
	36"(914mm)			NJAW-3236-W 	1346.33	1361.53	1381.40	1418.78	1430.48	1455.03
	42"(1067mm)			NJAW-3242-W 	1440.51	1458.05	1480.26	1522.31	1536.35	1563.24
	48"(1219mm)			NJAW-3248-W 	1534.69	1554.57	1579.12	1625.84	1642.22	1671.45
	60"(1524mm)			NJAW-3260-W 	1723.05	1747.61	1776.84	1832.90	1853.96	1887.87
Wood Group B										
32"(813mm)	18"(457mm)	Fabric/Acous./ Tackable	Wood	NJAW-3218-W 	\$1059.11	\$1067.29	\$1080.14	\$1103.51	\$1108.19	\$1125.72
	24"(610mm)			NJAW-3224-W 	1157.95	1168.47	1183.66	1211.70	1218.72	1238.59
	30"(762mm)			NJAW-3230-W 	1289.51	1302.37	1319.90	1352.61	1361.97	1384.18
	36"(914mm)			NJAW-3236-W 	1388.35	1403.55	1423.42	1460.80	1472.50	1497.05
	42"(1067mm)			NJAW-3242-W 	1487.19	1504.73	1526.94	1568.99	1583.03	1609.92
	48"(1219mm)			NJAW-3248-W 	1586.03	1605.91	1630.46	1677.18	1693.56	1722.79
	60"(1524mm)			NJAW-3260-W 	1783.71	1808.27	1837.50	1893.56	1914.62	1948.53
					Wood Group A		Wood Group B			
32"(813mm)	18"(457mm)	Wood	Wood	NJWW-3218-W 	\$1226.22		\$1268.28			
	24"(610mm)			NJWW-3224-W 	1330.22		1379.27			
	30"(762mm)			NJWW-3230-W 	1466.94		1522.98			
	36"(914mm)			NJWW-3236-W 	1570.94		1633.97			
	42"(1067mm)			NJWW-3242-W 	1674.94		1744.96			
	48"(1219mm)			NJWW-3248-W 	1778.94		1855.95			
	60"(1524mm)			NJWW-3260-W 	2074.58		2165.57			

List price shown is with non-powered base raceway.

This page intentionally blank

Foundation Elements — Super Base Panel

Standard, Grooved, Wood Top Cap, or No Top Cap – Translucent Pads

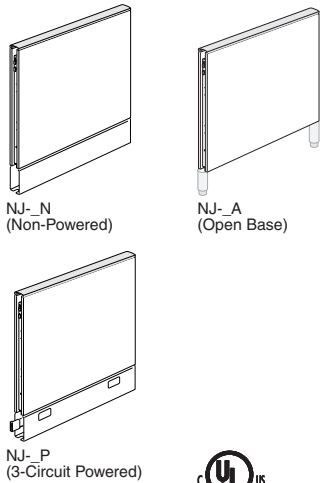

NOTES:

18" (457mm) wide translucent panels are not available.

Receptacle ports on the raceway cover measure 2" (51mm) top-to-bottom and 4 3/4" (121mm) side-to-side.

Powered panels with raceway covers ship with receptacle ports in the **base** raceway cover. Non-powered panels ship without receptacle ports in the **base** raceway cover. Powered panels with PDA but without raceway covers require separately specified base raceway covers for power and communication port locations other than the standard powered base raceway cover.

New York City (NYC) electrical applications require field installation of Power Distribution Assemblies (PDA). See Power Specifications on this page for details.

New York Port Authority (NYPA) electrical applications require metal raceway covers. See Power Specifications on this page for details.

When specifying stackable panels with wood pads, an unmatched vertical wood grain and natural variations in wood grain and color can be expected between pads. If a consistent look is desired, specify Matching Wood Pad Sets.

Some building codes may restrict the use of panel heights greater than 69" (1753mm). Consult your local code authority to assure that the furniture layout is compliant prior to installation.

Features

- **Non-powered and powered panels** include a panel core, panel locks, two pads with pad attachment brackets, vertical cable guide, top cap, with or without one-piece raceway cover; power distribution assembly/flex connector(s) when power is specified.
- **Open base panels** include a panel core, panel locks, two pads with pad attachment brackets, and top cap.
- Pads are field-removable for access to cabling or pad replacement.
- Grooved top caps allow attachment of panel attached screens, canopies, Jump Stuff ambient lights and off-modular components.
- Assembled panel thickness is 3" (76mm).
- The base raceway is 6 3/4" (171mm) high.
- Powered panels are available for countries that utilize 120 volt 60 hertz electrical systems and U.S. configured plugs and outlets.
- Ships with unassembled pads, top cap and base raceway cover (if applicable).

Specification Tips

- Connectors are required to create panel runs and intersections; specify separately.
- Super base panel will accept upper structure elements up to 120" (3048mm).
- Flex connectors provided for powered super base panels accommodate straight in-line, inside 90°, and inside 120° conditions (if applicable).
- Powered panels will only accept triplex receptacles; specify separately.
- Due to the aesthetic properties of the translucent surface material, it is not recommended to route cables behind pads.
- Open base is not available with power or base raceway cover.
- No top cap option is offered to reduce the number of top cap seams within a panel run. To be used with a separately specified grooved top cap long enough to span more than one panel. Refer to Grooved Top Cap for application details.
- No top cap option must be used with a separately specified grooved top cap.
- Use extended power connectors to pass through 18" (457mm) or 24" (610mm) non-powered panel.
- Base raceway is 6 3/4" (171mm) high for all power options.
- Do not mix 3-circuit with 4-circuit components. Do not mix 2+2 and 3+1 components. Components have unique polarity key and color coding.
- 3-circuit and 4-circuit power options include power distribution assembly, flex connector and powered raceway cover.
- New York City (NYC) and New York Port Authority (NYPA) electrical applications require field installation of Power Distribution Assembly (PDA).
- Hardwire option includes powered raceway cover only. Separately specify hardwire electrical kit for base raceway.
- Raceway cover needs to be separately specified for no raceway cover option.

To Order, Specify:

1) Product number, including:

1 Base Option:

- N** Non-Powered
- M** Non-Powered, NYPA, add **\$108.68** list
- A** Open Base

3-Circuit: 24"-60" wide

- P** 3-Circuit, add **\$198.64** list
- Y** 3-Circuit – NYC, add **\$177.61** list
- R** 3-Circuit – NYPA, add **\$286.29** list
- E** 3-Circuit – No raceway cover option with PDA, add **\$191.63** list
- C** Hardwire with raceway

4-Circuit: 24"-60" wide

- 2** 4-Circuit – 2+2, add **\$206.83** list
- W** 4-Circuit – 2+2 NYC, add **\$185.80** list
- T** 4-Circuit – 2+2 NYPA, add **\$294.48** list
- H** 4-Circuit – 2+2 no raceway cover option with PDA, add **\$199.82** list
- 4** 4-Circuit – 3+1, add **\$206.83** list
- V** 4-Circuit – 3+1 NYC, add **\$185.80** list
- S** 4-Circuit – 3+1 NYPA, add **\$294.48** list
- D** 4-Circuit – 3+1 no raceway cover option with PDA, add **\$199.82** list

Standard, Grooved or Wood Top Cap Panels

- 2) Translucent pattern/color for side one.
- 3) Trim color for frame for side one.*
- 4) Translucent pattern/color for side two.
- 5) Trim color for frame for side two.*
- 6) Trim color for base raceway cover (if applicable).*
- 7) Trim color or wood finish for top cap (if applicable).*

No Cap Top

- 2) Translucent pattern/color for side one.
- 3) Trim color for frame for side one.*
- 4) Translucent pattern/color for side two.
- 5) Trim color for frame for side two.*
- 6) Trim color for base raceway cover (if applicable).*

***Note:** Upcharge for mixed grade trim surfaces, refer to the electronic catalog for pricing.

Foundation Elements — Super Base Panel

Standard, Grooved, Wood Top Cap, or No Top Cap – Translucent Pads

Height	Width	Number ①	White Trim A	Trim B	Patterned Trim A	Trim B
Standard — Painted Top Cap						
32"(813mm)	24"(610mm)	NJXX-3224-S ■	\$1027.17	\$1082.14	\$1218.81	\$1273.78
	30"(762mm)	NJXX-3230-S ■	1174.42	1229.39	1419.82	1474.79
	36"(914mm)	NJXX-3236-S ■	1288.95	1343.92	1588.11	1643.08
	42"(1067mm)	NJXX-3242-S ■	1403.48	1458.45	1756.40	1811.37
	48"(1219mm)	NJXX-3248-S ■	1518.01	1572.98	1924.69	1979.66
	60"(1524mm)	NJXX-3260-S ■	1834.71	1889.68	2348.91	2403.88
Grooved — Painted Top Cap						
32"(813mm)	24"(610mm)	NJXX-3224-G ■	\$1134.67	\$1189.64	\$1326.31	\$1381.28
	30"(762mm)	NJXX-3230-G ■	1281.92	1336.89	1527.32	1582.29
	36"(914mm)	NJXX-3236-G ■	1396.45	1451.42	1695.61	1750.58
	42"(1067mm)	NJXX-3242-G ■	1510.98	1565.95	1863.90	1918.87
	48"(1219mm)	NJXX-3248-G ■	1625.51	1680.48	2032.19	2087.16
	60"(1524mm)	NJXX-3260-G ■	1942.21	1997.18	2456.41	2511.38

List price shown is with non-powered base raceway.

			White Wood Group A		Wood Group B		Patterned Wood Group A		Wood Group B	
			Trim A	Trim B	Trim A	Trim B	Trim A	Trim B	Trim A	Trim B
Wood Top Cap										
32"(813mm)	24"(610mm)	NJXX-3224-W ■	\$1270.23	\$1318.46	\$1286.58	\$1334.81	\$1461.87	\$1510.10	\$1478.22	\$1526.45
	30"(762mm)	NJXX-3230-W ■	1445.53	1493.76	1464.21	1512.44	1690.93	1739.16	1709.61	1757.84
	36"(914mm)	NJXX-3236-W ■	1588.11	1636.34	1609.12	1657.35	1887.27	1935.50	1908.28	1956.51
	42"(1067mm)	NJXX-3242-W ■	1730.69	1778.92	1754.03	1802.26	2083.61	2131.84	2106.95	2155.18
	48"(1219mm)	NJXX-3248-W ■	1873.27	1921.50	1898.94	1947.17	2279.95	2328.18	2305.62	2353.85
	60"(1524mm)	NJXX-3260-W ■	2246.07	2294.30	2276.40	2324.63	2760.27	2808.50	2790.60	2838.83


List price shown is with non-powered base raceway.

			White Trim A	Trim B	Patterned Trim A	Trim B
No Top Cap						
32"(813mm)	24"(610mm)	NJXX-3224-5 ■	\$ 968.74	\$1016.97	\$1160.38	\$1208.61
	30"(762mm)	NJXX-3230-5 ■	1115.99	1164.22	1361.39	1409.62
	36"(914mm)	NJXX-3236-5 ■	1230.52	1278.75	1529.68	1577.91
	42"(1067mm)	NJXX-3242-5 ■	1345.05	1393.28	1697.97	1746.20
	48"(1219mm)	NJXX-3248-5 ■	1459.58	1507.81	1866.26	1914.49
	60"(1524mm)	NJXX-3260-5 ■	1776.28	1824.51	2290.48	2338.71

List price shown is with non-powered base raceway.


Foundation Elements — Super Base Panel

Standard, Grooved, Wood Top Cap, or No Top Cap

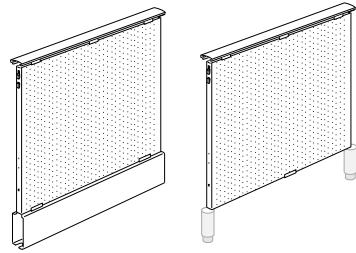

NJNN-SN
(Non-Powered)
NJNN-WN

NJNN-SA
(Open Base)



NJNN-SP
(3-Circuit Powered)
NJNN-WP



NOTES:

18" (457mm) wide panels are non-powered only. Specify extended power connectors to continue power through 18" (457mm) panels.

Receptacle ports on the raceway cover measure 2" (51mm) top-to-bottom and 4 3/4" (121mm) side-to-side.

Powered panels with raceway covers ship with receptacle ports in the **base** raceway cover. Non-powered panels ship without receptacle ports in the **base** raceway cover. Powered panels with PDA but without raceway covers require separately specified base raceway covers for power and communication port locations other than the standard powered base raceway cover.

New York City (NYC) electrical applications require field installation of Power Distribution Assemblies (PDA). See Power Specifications on this page for details.

New York Port Authority (NYPA) electrical applications require metal raceway covers. See Power Specifications on this page for details.

Some building codes may restrict the use of panel heights greater than 69" (1753mm). Consult your local code authority to assure that the furniture layout is compliant prior to installation.

Features

- **Non-powered and powered panels** include a panel core, choice of top cap, with or without one-piece raceway cover; power distribution assembly/flex connector(s) when power is specified.
- **Open base panels** include a panel core and choice of top cap.
- Grooved top caps allow attachment of panel attached screens, canopies, Jump Stuff ambient lights and off-modular components.
- Super base panel thickness is 3" (76mm).
- The base raceway is 6 3/4" (171mm) high.
- Powered panels are available for countries that utilize 120 volt 60 hertz electrical systems and U.S. configured plugs and outlets.
- Shipped with unassembled top cap and base raceway cover (if applicable).

Specification Tips

- Connectors are required to create panel runs and intersections; specify separately.
- Monolithic panels will accept upper structure elements up to 120" (3048mm).
- Flex connectors provided for powered monolithic panels accommodate straight in-line, inside 90°, and inside 120° conditions (if applicable).
- Powered panels will only accept triplex receptacles; specify separately.
- Specify when used with matching wood pad sets and off-modular.
- Open base is not available with power or base raceway cover.
- Use extended power connectors to pass through 18" (457mm) or 24" (610mm) non-powered panel.
- Base raceway is 6 3/4" (171mm) high for all power options.
- Do not mix 3-circuit with 4-circuit components. Do not mix 2+2 and 3+1 components. Components have unique polarity key and color coding.
- 3-circuit and 4-circuit power options include power distribution assembly, flex connector and powered raceway cover.
- New York City (NYC) and New York Port Authority (NYPA) electrical applications require field installation of Power Distribution Assembly (PDA).
- Hardwire option includes powered raceway cover only. Separately specify hardwire electrical kit for base raceway.
- Raceway cover needs to be separately specified for no raceway cover option.

To Order, Specify:

1) Product number, including:

1 Base Option:

- N** Non-Powered
- M** Non-Powered, NYPA, add **\$108.68** list
- A** Open Base

3-Circuit: 24"-60" wide

- P** 3-Circuit, add **\$198.64** list
- Y** 3-Circuit – NYC, add **\$177.61** list
- R** 3-Circuit – NYPA, add **\$286.29** list
- E** 3-Circuit – No raceway cover option with PDA, add **\$191.63** list

C Hardwire with raceway

4-Circuit: 24"-60" wide

- 2** 4-Circuit – 2+2, add **\$206.83** list
- W** 4-Circuit – 2+2 NYC, add **\$185.80** list
- T** 4-Circuit – 2+2 NYPA, add **\$294.48** list
- H** 4-Circuit – 2+2 no raceway cover option with PDA, add **\$199.82** list
- 4** 4-Circuit – 3+1, add **\$206.83** list
- V** 4-Circuit – 3+1 NYC, add **\$185.80** list
- S** 4-Circuit – 3+1 NYPA, add **\$294.48** list
- D** 4-Circuit – 3+1 no raceway cover option with PDA, add **\$199.82** list

- 2) Trim color for base raceway cover (if applicable).*
- 3) Trim color for top cap (if applicable).*

Standard or Grooved Top Cap Panels

1) Product number.

- 2) Trim color for base raceway cover (if applicable).*
- 3) Trim color for top cap.*

Wood Top Cap Panels

1) Product number.

- 2) Trim color for base raceway cover (if applicable).*
- 3) Wood finish for top cap.

No Cap Top

1) Product number.

- 2) Trim color for base raceway cover (if applicable).*

***Note:** Upcharge for mixed grade trim surfaces, refer to the electronic catalog for pricing.

Foundation Elements — Super Base Panel

Standard, Grooved, Wood Top Cap, or No Top Cap

Height	Width	Number ①	Trim A	Trim B
Standard — Painted Top Cap				
32"(813mm)	18"(457mm)	NJNN-3218-S	\$297.98	\$319.15
	24"(610mm)	NJNN-3224-S	315.51	336.68
	30"(762mm)	NJNN-3230-S	365.76	386.93
	36"(914mm)	NJNN-3236-S	383.29	404.46
	42"(1067mm)	NJNN-3242-S	400.82	421.99
	48"(1219mm)	NJNN-3248-S	418.35	439.52
	60"(1524mm)	NJNN-3260-S	541.05	562.22
Grooved — Painted Top Cap				
32"(813mm)	18"(457mm)	NJNN-3218-G	\$405.48	\$426.65
	24"(610mm)	NJNN-3224-G	423.01	444.18
	30"(762mm)	NJNN-3230-G	473.26	494.43
	36"(914mm)	NJNN-3236-G	490.79	511.96
	42"(1067mm)	NJNN-3242-G	508.32	529.49
	48"(1219mm)	NJNN-3248-G	525.85	547.02
	60"(1524mm)	NJNN-3260-G	648.55	669.72

List price shown is with non-powered base raceway.

			Wood Group A		Wood Group B	
			Trim A	Trim B	Trim A	Trim B
Wood Top Cap						
32"(813mm)	18"(457mm)	NJNN-3218-W	\$512.99	\$527.42	\$527.01	\$541.44
	24"(610mm)	NJNN-3224-W	558.57	573.00	574.92	589.35
	30"(762mm)	NJNN-3230-W	636.87	651.30	655.55	669.98
	36"(914mm)	NJNN-3236-W	682.45	696.88	703.46	717.89
	42"(1067mm)	NJNN-3242-W	728.03	742.46	751.37	765.80
	48"(1219mm)	NJNN-3248-W	773.61	788.04	799.28	813.71
	60"(1524mm)	NJNN-3260-W	952.41	966.84	982.74	997.17


List price shown is with non-powered base raceway.

			Trim A	Trim B
No Top Cap				
32"(813mm)	18"(457mm)	NJNN-3218-5	\$239.55	\$253.98
	24"(610mm)	NJNN-3224-5	257.08	271.51
	30"(762mm)	NJNN-3230-5	307.33	321.76
	36"(914mm)	NJNN-3236-5	324.86	339.29
	42"(1067mm)	NJNN-3242-5	342.39	356.82
	48"(1219mm)	NJNN-3248-5	359.92	374.35
	60"(1524mm)	NJNN-3260-5	482.62	497.05

List price shown is with non-powered base raceway.

Foundation Elements — Super Base Panel

Single Pad



NJP-32
NJF-32
NJA-32
NJH-32
NIX-32
N JW-32

NOTES:
When specifying wood pads, an unmatched vertical wood grain and natural variations in wood grain and color can be expected between pads. If a consistent look is desired, specify Matching Wood Pad Sets.
18" (457mm) wide perforated and translucent pads are not available.

Feature

- Includes one pad.

Specification Tips

- Used in combination with a super base panel.
- Frequently used in reconfiguration applications.
- Due to the aesthetic properties of the perforated and translucent surface material, it is not recommended to route cables behind pads.

To Order, Specify:

- 1) Product number.
- 2) Painted, fabric/colorway, translucent, or wood finish.
- 3) Trim color for translucent frame.

Foundation Elements — Super Base Panel

Single Pad


Height	Width	Surface	Number	Trim A	Trim B	Fabric Grade A	Fabric Grade B	C	E	F	G
25"(635mm)	18"(457mm)	Painted	NJP-3218	\$100.77	\$118.23						
	24"(610mm)		NJP-3224	116.81	138.81						
	30"(762mm)		NJP-3230	132.85	159.39						
	36"(914mm)		NJP-3236	149.76	180.84						
	42"(1067mm)		NJP-3242	166.09	201.71						
	48"(1219mm)		NJP-3248	182.42	222.58						
	60"(1524mm)		NJP-3260	215.08	264.32						
25"(635mm)	18"(457mm)	Fabric/Tackable	NJF-3218			\$125.95	\$141.00	\$146.82	\$161.21	\$167.55	\$172.49
	24"(610mm)		NJF-3224			140.84	158.13	166.47	186.22	196.09	203.46
	30"(762mm)		NJF-3230			155.73	175.26	186.12	211.23	224.63	234.43
	36"(914mm)		NJF-3236			170.62	192.39	205.77	236.24	253.17	265.40
	42"(1067mm)		NJF-3242			194.67	218.68	234.58	270.41	290.87	305.53
	48"(1219mm)		NJF-3248			211.85	238.10	256.52	297.71	321.70	338.79
	60"(1524mm)		NJF-3260			246.21	276.94	300.40	352.31	383.36	405.31
25"(635mm)	18"(457mm)	Fabric/Acoustic/Tackable	NJA-3218			\$130.54	\$140.72	\$145.79	\$158.81	\$163.96	\$168.37
	24"(610mm)		NJA-3224			147.72	162.77	170.75	189.96	199.21	206.39
	30"(762mm)		NJA-3230			164.90	184.82	195.71	221.11	234.46	244.41
	36"(914mm)		NJA-3236			182.08	206.87	220.67	252.26	269.71	282.43
	42"(1067mm)		NJA-3242			208.42	238.08	254.79	292.57	314.12	329.61
	48"(1219mm)		NJA-3248			227.89	262.42	282.04	326.01	351.66	369.92
	60"(1524mm)		NJA-3260			266.83	311.10	336.54	392.89	426.74	450.54
25"(635mm)	24"(610mm)	Perforated	NJH-3224	\$294.30	\$316.30						
	30"(762mm)		NJH-3230	325.22	351.76						
	36"(914mm)		NJH-3236	376.78	407.86						
	42"(1067mm)		NJH-3242	414.58	450.20						
	48"(1219mm)		NJH-3248	452.38	492.54						
	60"(1524mm)		NJH-3260	527.98	577.22						

				Wood Group A	Wood Group B	
25"(635mm)	18"(457mm)	Wood	NJW-3218	\$479.83	\$535.95	
	24"(610mm)		NJW-3224	494.72	553.70	
	30"(762mm)		NJW-3230	509.61	571.45	
	36"(914mm)		NJW-3236	524.50	589.20	
	42"(1067mm)		NJW-3242	644.75	712.31	
	48"(1219mm)		NJW-3248	685.98	756.40	
	60"(1524mm)		NJW-3260	768.44	844.58	

				White Trim A	Trim B	Patterned Trim A	Trim B	
25"(635mm)	24"(610mm)	Translucent	NJX-3224	\$363.03	\$379.93	\$503.90	\$520.80	
	30"(762mm)		NJX-3230	379.07	395.97	545.14	562.04	
	36"(914mm)		NJX-3236	463.81	480.71	655.08	671.98	
	42"(1067mm)		NJX-3242	502.75	519.65	719.22	736.12	
	48"(1219mm)		NJX-3248	541.69	558.59	783.36	800.26	
	60"(1524mm)		NJX-3260	619.57	636.47	911.64	928.54	

Foundation Elements — Super Base Panel

Off-Modular Single Pad

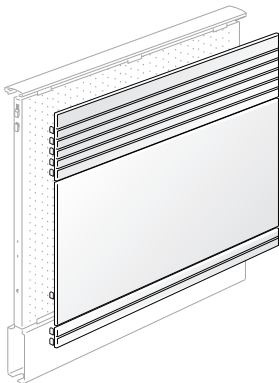

NZP-32
NZF-32
NZA-32
NZH-32
NZX-32
NZW-32

Features

- Includes one 16”(406mm) pad, one 7”(178mm) rail, one 2”(51mm) rail, and attachment hardware.
- All off-modular pads consist of a 7”(178mm) high top rail and a 2”(51mm) high bottom rail which provides off-modularity. The 16”(406mm) high center portion of the off-modular pad may be any panel surface listed on following page.

Specification Tips

- Used in combination with a super base panel without pads and single super base pads for both sides for an off-modular application.
- Grooved top cap and panel configurations with full-height connectors are required for off-modular applications.
- Off-modular cannot be used with monolithic panels.
- Off-modular spine requires full-height connectors.
- Off-modular t-mount must be specified to attach perpendicular panel.
- Use off-modular worksurface bracket—worksurface cantilevers cannot be used.
- Return panel may be a monolithic or stackable panel configuration.
- Due to the aesthetic properties of the perforated and translucent surface material, it is not recommended to route cables behind pads.

To Order, Specify:

- 1) Product number.
- 2) Painted, fabric/colorway, translucent, or wood finish.*
- 3) Trim color for translucent frame (if applicable).*
- 4) Trim color for bottom rail.*
- 5) Trim color for top rail.*

***Note:** Upcharge for mixed grade trim surfaces, refer to the electronic catalog for pricing.

Foundation Elements — Super Base Panel

Off-Modular Single Pad

Height	Width	Surface	Number	Trim A	Trim A		C	E	F	G
					Fabric	Grade				
				A	A	B				
25"(635mm)	24"(610mm)	Painted	NZP-3224	\$251.24						
	30"(762mm)		NZP-3230	268.77						
	36"(914mm)		NZP-3236	286.30						
	42"(1067mm)		NZP-3242	303.83						
	48"(1219mm)		NZP-3248	321.36						
	60"(1524mm)		NZP-3260	356.42						
25"(635mm)	24"(610mm)	Fabric/ Tackable	NZF-3224		\$268.77	\$271.10	\$274.61	\$280.45	\$285.13	\$287.47
	30"(762mm)		NZF-3230		289.81	292.67	296.77	303.88	309.42	312.29
	36"(914mm)		NZF-3236		310.85	314.24	318.93	327.31	333.71	337.11
	42"(1067mm)		NZF-3242		331.89	335.81	341.09	350.74	358.00	361.93
	48"(1219mm)		NZF-3248		352.93	357.38	363.25	374.17	382.29	386.75
	60"(1524mm)		NZF-3260		395.01	400.52	407.57	421.03	430.87	436.39
25"(635mm)	24"(610mm)	Fabric/Acous./ Tackable	NZA-3224		\$283.96	\$286.29	\$289.80	\$295.64	\$300.32	\$302.66
	30"(762mm)		NZA-3230		305.00	307.86	311.96	319.07	324.61	327.48
	36"(914mm)		NZA-3236		326.04	329.43	334.12	342.50	348.90	352.30
	42"(1067mm)		NZA-3242		347.08	351.00	356.28	365.93	373.19	377.12
	48"(1219mm)		NZA-3248		368.12	372.57	378.44	389.36	397.48	401.94
	60"(1524mm)		NZA-3260		410.20	415.71	422.76	436.22	446.06	451.58
25"(635mm)	24"(610mm)	Perforated	NZH-3224	\$424.19						
	30"(762mm)		NZH-3230	466.26						
	36"(914mm)		NZH-3236	508.33						
	42"(1067mm)		NZH-3242	550.40						
	48"(1219mm)		NZH-3248	592.47						
	60"(1524mm)		NZH-3260	676.61						

Foundation Elements — Super Base Panel

Off-Modular Single Pad


Height	Width	Surface	Number	Trim B	Trim B Fabric Grade		C	E	F	G
					A	B				
25"(635mm)	24"(610mm)	Painted	NZP-3224	\$252.41						
	30"(762mm)		NZP-3230	272.28						
	36"(914mm)		NZP-3236	292.15						
	42"(1067mm)		NZP-3242	312.02						
	48"(1219mm)		NZP-3248	331.89						
	60"(1524mm)		NZP-3260	371.63						
25"(635mm)	24"(610mm)	Fabric/ Tackable	NZF-3224		\$269.94	\$272.27	\$275.78	\$281.62	\$286.30	\$288.64
	30"(762mm)		NZF-3230		293.32	296.18	300.28	307.39	312.93	315.80
	36"(914mm)		NZF-3236		316.70	320.09	324.78	333.16	339.56	342.96
	42"(1067mm)		NZF-3242		340.08	344.00	349.28	358.93	366.19	370.12
	48"(1219mm)		NZF-3248		363.46	367.91	373.78	384.70	392.82	397.28
	60"(1524mm)		NZF-3260		410.22	415.73	422.78	436.24	446.08	451.60
25"(635mm)	24"(610mm)	Fabric/Acous./ Tackable	NZA-3224		\$285.13	\$287.46	\$290.97	\$296.81	\$301.49	\$303.83
	30"(762mm)		NZA-3230		308.51	311.37	315.47	322.58	328.12	330.99
	36"(914mm)		NZA-3236		331.89	335.28	339.97	348.35	354.75	358.15
	42"(1067mm)		NZA-3242		355.27	359.19	364.47	374.12	381.38	385.31
	48"(1219mm)		NZA-3248		378.65	383.10	388.97	399.89	408.01	412.47
	60"(1524mm)		NZA-3260		425.41	430.92	437.97	451.43	461.27	466.79
25"(635mm)	24"(610mm)	Perforated	NZH-3224	\$435.88						
	30"(762mm)		NZH-3230	480.29						
	36"(914mm)		NZH-3236	524.70						
	42"(1067mm)		NZH-3242	569.11						
	48"(1219mm)		NZH-3248	613.52						
	60"(1524mm)		NZH-3260	702.34						

				Wood Group A		Wood Group B				
				Trim A	Trim B	Trim A	Trim B			
25"(635mm)	24"(610mm)	Wood	NZW-3224	\$465.08	\$466.25	\$503.65	\$504.82			
	30"(762mm)		NZW-3230	507.15	510.66	549.23	552.74			
	36"(914mm)		NZW-3236	549.22	555.07	594.81	600.66			
	42"(1067mm)		NZW-3242	591.29	599.48	640.39	648.58			
	48"(1219mm)		NZW-3248	633.36	643.89	685.97	696.50			
	60"(1524mm)		NZW-3260	717.50	732.71	777.13	792.34			

				White	Trim B	Patterned				
				Trim A		Trim A	Trim B			
25"(635mm)	24"(610mm)	Translucent	NZX-3224	\$452.23	\$453.40	\$535.20	\$536.37			
	30"(762mm)		NZX-3230	494.30	497.81	587.79	591.30			
	36"(914mm)		NZX-3236	536.37	542.22	640.38	646.23			
	42"(1067mm)		NZX-3242	578.44	586.63	692.97	701.16			
	48"(1219mm)		NZX-3248	620.51	631.04	745.56	756.09			
	60"(1524mm)		NZX-3260	704.65	719.86	850.74	865.95			

Foundation and Upper Structure

Pre-Configured (Sectional) Matching Wood Pad Sets

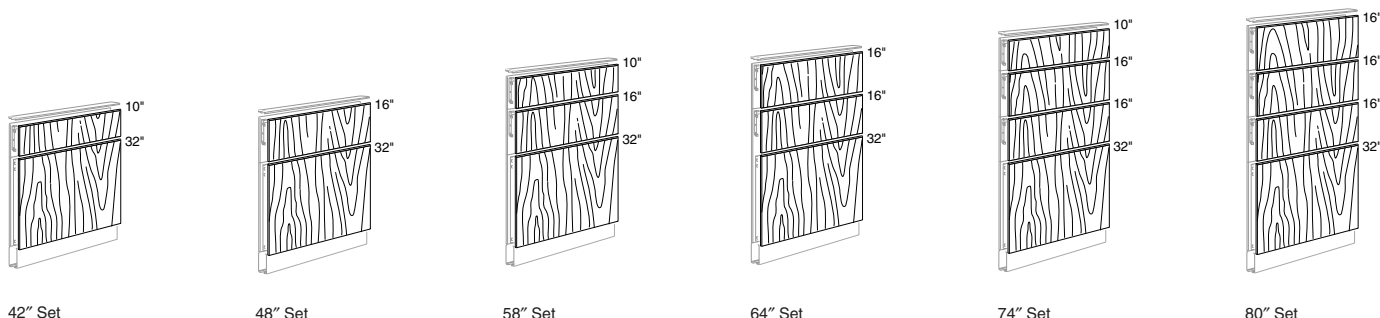

NTSW-NN

Features

- Includes pads.
- Multi-pad set for application on one side of a super base panel/stack kit configuration.
- Vertical wood grain and color is matched between pads.
- Pad sets individually labeled to ensure color and grain consistency.
- No power or communications ports.

Specification Tips

- Specify pad set height equal to the total height of the panel configuration.
- Specify with super base panel without pads and stack kit cross bars.

To Order, Specify:

- 1) Product number.
- 2) Wood finish.

Height	Width	Pad Set Quantity			Number	Wood Group A	Wood Group B
		32"	16"	10"			
42"(1067mm)	18"(457mm)	1		1	NTSW-4218-NN	\$ 732.58	\$ 745.31
	24"(610mm)				NTSW-4224-NN	797.39	813.60
	30"(762mm)				NTSW-4230-NN	862.20	881.89
	36"(914mm)				NTSW-4236-NN	927.01	950.18
	42"(1067mm)				NTSW-4242-NN	991.82	1018.47
	48"(1219mm)				NTSW-4248-NN	1056.63	1086.76
	60"(1524mm)				NTSW-4260-NN	1186.25	1223.34
48"(1219mm)	18"(457mm)	1	1		NTSW-4818-NN	\$ 796.22	\$ 812.43
	24"(610mm)				NTSW-4824-NN	866.82	886.50
	30"(762mm)				NTSW-4830-NN	937.42	960.57
	36"(914mm)				NTSW-4836-NN	1008.02	1034.64
	42"(1067mm)				NTSW-4842-NN	1078.62	1108.71
	48"(1219mm)				NTSW-4848-NN	1149.22	1182.78
	60"(1524mm)				NTSW-4860-NN	1290.42	1330.92
58"(1473mm)	18"(457mm)	1	1	1	NTSW-5818-NN	\$1043.89	\$1072.82
	24"(610mm)				NTSW-5824-NN	1138.79	1172.34
	30"(762mm)				NTSW-5830-NN	1233.69	1271.86
	36"(914mm)				NTSW-5836-NN	1328.59	1371.38
	42"(1067mm)				NTSW-5842-NN	1423.49	1470.90
	48"(1219mm)				NTSW-5848-NN	1518.39	1570.42
	60"(1524mm)				NTSW-5860-NN	1708.19	1769.46
64"(1626mm)	18"(457mm)	1	2		NTSW-6418-NN	\$1107.54	\$1139.95
	24"(610mm)				NTSW-6424-NN	1208.23	1245.26
	30"(762mm)				NTSW-6430-NN	1308.92	1350.57
	36"(914mm)				NTSW-6436-NN	1409.61	1455.88
	42"(1067mm)				NTSW-6442-NN	1510.30	1561.19
	48"(1219mm)				NTSW-6448-NN	1610.99	1666.50
	60"(1524mm)				NTSW-6460-NN	1812.37	1877.12
74"(1880mm)	18"(457mm)	1	2	1	NTSW-7418-NN	\$1355.20	\$1400.34
	24"(610mm)				NTSW-7424-NN	1480.18	1531.11
	30"(762mm)				NTSW-7430-NN	1605.16	1661.88
	36"(914mm)				NTSW-7436-NN	1730.14	1792.65
	42"(1067mm)				NTSW-7442-NN	1855.12	1923.42
	48"(1219mm)				NTSW-7448-NN	1980.10	2054.19
	60"(1524mm)				NTSW-7460-NN	2230.06	2315.73
80"(2032mm)	18"(457mm)	1	3		NTSW-8018-NN	\$1418.85	\$1467.47
	24"(610mm)				NTSW-8024-NN	1549.62	1604.03
	30"(762mm)				NTSW-8030-NN	1680.39	1740.59
	36"(914mm)				NTSW-8036-NN	1811.16	1877.15
	42"(1067mm)				NTSW-8042-NN	1941.93	2013.71
	48"(1219mm)				NTSW-8048-NN	2072.70	2150.27
	60"(1524mm)				NTSW-8060-NN	2334.24	2423.39

Panel Connectors and Trim Covers

Straight Full-Height Connector

	Height	Number ^①	Price
 <p>Top View</p>  <p>NLSS-SN NLSS-GN</p>  <p>NLSS-S1 NLSS-G1</p>	Standard		
	32"(813mm)	NLSS-32-S 	\$ 84.90
	42"(1067mm)	NLSS-42-S 	89.50
	48"(1219mm)	NLSS-48-S 	92.26
	53"(1346mm)	NLSS-53-S 	94.56
	58"(1473mm)	NLSS-58-S 	96.86
	64"(1626mm)	NLSS-64-S 	99.62
	80"(2032mm)	NLSS-80-S 	118.61
	Grooved		
	32"(813mm)	NLSS-32-G 	\$ 84.90
	42"(1067mm)	NLSS-42-G 	89.50
	48"(1219mm)	NLSS-48-G 	92.26
	53"(1346mm)	NLSS-53-G 	94.56
	58"(1473mm)	NLSS-58-G 	96.86
	64"(1626mm)	NLSS-64-G 	99.62
	80"(2032mm)	NLSS-80-G 	118.61

List price shown is with base raceway.

Features

- **Base raceway panel connector** includes slotted connector, light blocks, leveling glide, carpet gripper, and top cap aligner.
- **Open base panel connector** includes slotted connector, light blocks, leveling glide, carpet gripper, top cap aligner, and connector sleeve.
- Connects foundation elements, stack kits, or stack pads in a straight run.
- Provides slots for mounting components.
- Connector reveal is standard in black finish color only.
- Connector sleeves must be assembled onto the connector prior to panel installation.
- ◆ Available on RUSH.

Specification Tips

- When used to connect monolithic panels of different heights in straight condition, specify full-height connector to match the height of tallest panel.
- When used to connect a stackable panel configuration with stack kit(s) or stack pad(s) in a straight condition, at a minimum specify full-height connector to match the height of tallest foundation element within the condition. Or specify full-height connector to match the height of the tallest panel configuration within the condition. Refer to the specification guide for details.
- May be used in conjunction with an extended straight connector.
- Specify variable-height cover for exposed portion of connector that extends above shorter panel.
- Specify **-(G_)** for grooved option if either panel top cap within the straight condition is grooved.
- Specify **-(S_)** for standard option if both panel top caps within the straight condition are standard.
- Specify **-(_1)** for open base option if either or both panels within the straight condition are open base.
- Specify **-(_N)** for base raceway option if both panels within the straight condition are standard base raceways.
- For open base application, specify trim color for upper connector sleeve. Lower sleeve is standard in black finish color only.
- **58" panel connector allows for the following stack configurations:**
 - 32" foundation element with 10" and 16" stack kit.
(NOTE: 10" stack kit can be above or below the 16" stack kit.)
 - 42" foundation element with 16" stack
 - 48" foundation element with 10" stack
- For segmented trim applications, specify covers separately through eParts.
- Heights will not line-up using 58" height configuration when a 32" foundation element is used.

To Order, Specify:

- 1) Product number.
- 2) Trim color for upper connector sleeve (if applicable).

① Base Raceway Specification

Base raceway option is available on 32"(813mm) – 80"(2032mm) high connectors. To specify a base raceway, place an **N** suffix as the **8th digit** in the product number.

Examples:

NLSS-42-SN = Standard; two base raceway panels

NLSS-42-GN = Grooved; two base raceway panels

Open Base Specification

Open base option is available on 32"(813mm) – 80"(2032mm) high connectors. To specify open base, place a **1** for one open base panel as the **8th digit** in the product number and add **\$64.27** list.

Examples:

NLSS-42-S1 = Standard; one or two open base panels


NLSS-42-G1 = Grooved; one or two open base panels

Note: \$4.04 upcharge for Grade B pricing.


Panel Connectors and Trim Covers

Straight Pre-Configured (Sectional) Connector


Straight Pre-Configured (Sectional) Connector





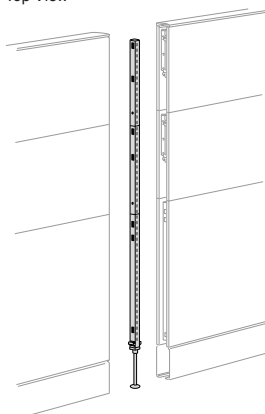



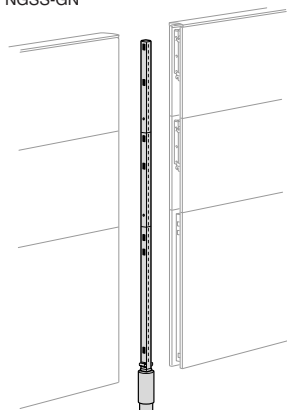

Top View



NGSS-SN
NGSS-GN



NGSS-S1
NGSS-G1

Height	Connector Configurations			Number ①	Price
	10"	16"	32"		
Standard					
42"(1067mm)	1		1	NGSS-42-S 	\$115.70
48"(1219mm)		1	1	NGSS-48-S 	134.18
64"(1626mm)		2	1	NGSS-64-S 	199.74
80"(2032mm)		3	1	NGSS-80-S 	280.43
Grooved					
42"(1067mm)	1		1	NGSS-42-G 	\$115.70
48"(1219mm)		1	1	NGSS-48-G 	134.18
64"(1626mm)		2	1	NGSS-64-G 	199.74
80"(2032mm)		3	1	NGSS-80-G 	280.43

List price shown is with base raceway.

Features

- **Base raceway panel connector** includes slotted connectors, light blocks, leveling glide, carpet gripper, and top cap aligner.
- **Open base panel connector** includes slotted connectors, light blocks, leveling glide, carpet gripper, top cap aligner, and connector sleeve.
- Connects panel configurations with 32"(813mm) high foundation elements and corresponding stack kits or stack pads in a straight run.
- Provides slots for mounting components.
- Connector reveal is standard in black finish color only.
- Connectors may be separated for reconfiguration.
- Shipped unassembled.
- Connector sleeves must be assembled onto the connector prior to panel installation.

Specification Tips

- **Can only be used with panel configurations starting with 32"(813mm) high foundation elements.**
- The connector has a foundation height of 32"(813mm) and corresponding 16"(406mm) and 10"(254mm) connectors to equal the overall height specified.
- May be used in conjunction with straight extended connectors. (Exception: Extended connector cannot be added to a 42"(1067mm) high straight pre-configured connector.)
- Specify variable-height cover for exposed portion of connector that extends above shorter panel.
- Specify **-(G_)** for **grooved option** if either panel top cap within the straight condition is grooved.
- Specify **-(S_)** for **standard option** if both panel top caps within the straight condition are standard.
- Specify **-(_1)** for **open base option** if either or both panels within the straight condition are open base.
- Specify **-(_N)** for **base raceway option** if both panels within the straight condition are standard base raceways.
- For open base application, specify trim color for upper connector sleeve. Lower sleeve is standard in black finish color only.
- **For unbalanced overhead applications, full-height connectors are recommended.**

To Order, Specify:

- 1) Product number.
- 2) Trim color for upper connector sleeve (if applicable).

① Base Raceway Specification

Base raceway option is available on 32"(813mm) – 80"(2032mm) high connectors. To specify a base raceway, place an **N** suffix as the **8th digit** in the product number.

Examples:

NGSS-42-SN = Standard; two base raceway panels

NGSS-42-GN = Grooved; two base raceway panels

Open Base Specification

Open base option is available on 32"(813mm) – 80"(2032mm) high connectors. To specify open base, place a **1** for one open base panel as the **8th digit** in the product number and add **\$64.27** list.

Examples:


NGSS-42-S1 = Standard; one or two open base panels


NGSS-42-G1 = Grooved; one or two open base panels

Note: \$4.04 upcharge for Grade B pricing.


Panel Connectors and Trim Covers

Straight Extended Connectors

	Height	Number	Price
Straight Extended Connectors	10"(254mm)	NXSS-10 	\$59.59
	16"(406mm)	NXSS-16 	70.15




Top View

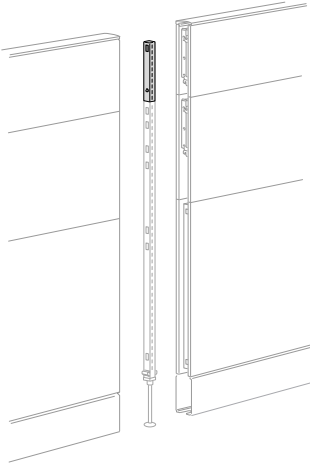

10" Connector

NXSS-10

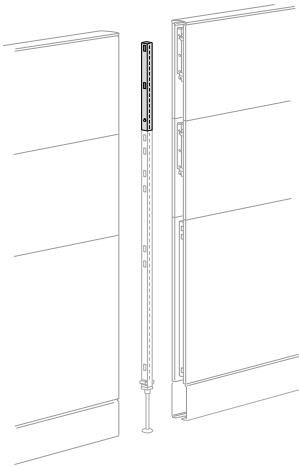


16" Connector

NXSS-16

Features

- Includes connector and light block.
- Connects stack kits in a straight run.
- Provides slots for mounting components.
- Connector reveal is standard in black finish color only.

 Available on RUSH.

Specification Tips


- Specify connector to match stack kit height.
- Must be used in conjunction with a straight full-height or straight pre-configured standard or grooved connector. (Exception: Extended connector cannot be added to a 42"(1067) high straight pre-configured connector.)
- Specify variable-height cover for exposed portion if connector extends above shorter panel.
- 10"(254mm) high connector can only be used at the top of a panel configuration. Will not accept additional connectors.
- **Cannot be used to attach foundation elements.**
- **For unbalanced overhead applications, full-height connectors are recommended.**

To Order, Specify:


- 1) Product number.
(No finish specification required.)

Panel Connectors and Trim Covers


2-Way 90°, Full-Height Connector with Full-Height Cover




Top View



NL2P-SN NL2F-SN
NL2P-GN NL2F-GN
NL2P-WN NL2F-WN NL2W-WN

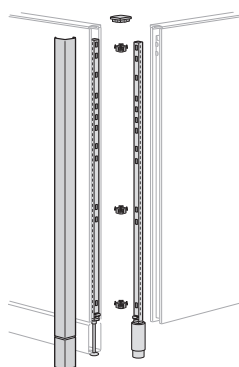

NL2P-S1 NL2F-S1
NL2P-G1 NL2F-G1
NL2P-W1 NL2F-W1 NL2W-W1



NL2P-S2 NL2F-S2
NL2P-G2 NL2F-G2
NL2P-W2 NL2F-W2 NL2W-W2

Features

- **Base raceway panel connector** includes top cap, light blocks, vertical cover, base raceway cover, leveling glides, carpet grippers, slotted connectors and corner connectors, with appropriate number of top cap to corner aligners.
 - **Open base panel connector** includes top cap, light blocks, vertical cover, leveling glides, carpet grippers, slotted connectors and corner connectors with appropriate number of top cap to corner aligners, and appropriate number of connector sleeves.
 - Connects foundation elements, stack kits, or stack pads in a 2-way 90° intersection.
 - Provides slots for mounting components.
 - Connector reveal is standard in black finish color only.
 - Connectors shipped assembled.
 - Connector sleeves must be assembled onto the connector prior to panel installation.
- Available on RUSH.

Specification Tips

- When used to connect panel configurations of different heights in a 2-way 90° intersection, specify full-height connector to match the height of tallest panel configuration.
- When used to connect a stackable panel configuration with stack kit(s) or stack pad(s) in a 2-way 90° intersection, at a minimum specify full-height connector to match the height of tallest foundation element within the intersection. In addition, separately specify 2-way extended connectors for upper structure if applicable. Or specify full-height connector to match the height of the tallest panel configuration within the intersection. Refer to the specification guide for details.
- May be used in conjunction with 2-way extended connectors.
- Specify variable-height cover for exposed portion of connector that extends above the shorter panel.
- Specify **-(G_)** for grooved option if either panel top cap within the intersection is grooved.
- Specify **-(S_)** for standard option if both panel top caps within the intersection are standard.
- Specify **-(1 or 2)** for open base option to match the number of panels within the intersection which are open base.
- Specify **-(N)** for base raceway option if both panels within the intersection are standard base raceways.
- Standard connector top cap and the grooved connector top cap are aesthetically the same; smooth top cap surface without grooves.
- For open base application, specify trim color for upper connector sleeve. Lower sleeve is standard in black finish color only.
- **58" panel connector allows for the following stack configurations:**
 - 32" foundation element with 10" and 16" stack kit. (NOTE: 10" stack kit can be above or below the 16" stack kit.)
 - 42" foundation element with 16" stack
 - 48" foundation element with 10" stack
- For segmented trim applications, specify covers separately through eParts.
- Heights will not line-up using 58" height configuration when a 32" foundation element is used.

*Note: Upcharge for mixed grade trim surfaces, refer to the electronic catalog for pricing.

To Order, Specify:

Standard or Grooved Top Cap w/Painted Cover

- 1) Product number.
- 2) Trim color for cover.*
- 3) Trim color for base raceway cover/upper connector sleeve(s).*
- 4) Trim color for top cap.*

Standard or Grooved Top Cap w/Fabric Cover

- 1) Product number.
- 2) Fabric/colorway for cover.
- 3) Trim color for base raceway cover/upper connector sleeve(s).*
- 4) Trim color for top cap.*

Grooved Top Cap w/Wood Cover

- 1) Product number.
- 2) Wood finish for cover.
- 3) Trim color for base raceway cover/upper connector sleeve(s).*
- 4) Trim color for top cap.*

Wood Top Cap w/Painted Cover

- 1) Product number.
- 2) Trim color for cover.*
- 3) Trim color for base raceway cover/upper connector sleeve(s).*
- 4) Wood finish for top cap.

Wood Top Cap w/Fabric Cover

- 1) Product number.
- 2) Fabric/colorway for cover.
- 3) Trim color for base raceway cover/upper connector sleeve(s).*
- 4) Wood finish for top cap.

Wood Top Cap w/Wood Cover

- 1) Product number.
- 2) Wood finish for cover.
- 3) Trim color for base raceway cover/upper connector sleeve(s).*
- 4) Wood finish for top cap.

① Base Raceway Specification

Base raceway option is available on 32"(813mm) – 80"(2032mm) high connectors. To specify a base raceway, place an **N** suffix as the **8th digit** in the product number.

Examples:

NL2P-42-SN = Standard top cap; two base raceway panels
NL2P-42-GN = Grooved top cap; two base raceway panels

Open Base Specification

Open base option is available on 32"(813mm) – 80"(2032mm) high connectors. To specify open base, place a **1** for one open base panel as the **8th digit** in the product number and add **\$64.27** list, or a **2** for two open base panels as the **8th digit** in the product number and add **\$128.54** list.

Examples:

NL2P-42-S1 = Standard top cap; one open base panel
NL2P-42-S2 = Standard top cap; two open base panels
NL2P-42-G1 = Grooved top cap; one open base panel
NL2P-42-G2 = Grooved top cap; two open base panels

Panel Connectors and Trim Covers

2-Way 90°, Full-Height Connector with Full-Height Cover

Width	Height	Painted Cover Number ①	Trim A	Fabric Cover Number ①	Trim A		C	E	F	G
					Fabric	Grade				
Standard — Painted Top Cap										
3"(76mm)	32"(813mm)	NL2P-32-S	\$193.97	NL2F-32-S	\$273.43	\$285.12	\$299.14	\$327.18	\$347.04	\$358.74
	42"(1067mm)	NL2P-42-S	199.77	NL2F-42-S	279.23	291.52	306.44	336.28	357.14	369.64
	48"(1219mm)	NL2P-48-S	203.25	NL2F-48-S	282.71	295.36	310.82	341.74	363.20	376.18
	53"(1346mm)	NL2P-53-S	206.15	NL2F-53-S	285.61	298.56	314.47	346.29	368.25	381.63
	58"(1473mm)	NL2P-58-S	209.05	NL2F-58-S	288.51	301.76	318.12	350.84	373.30	387.08
	64"(1626mm)	NL2P-64-S	212.53	NL2F-64-S	291.99	305.60	322.50	356.30	379.36	393.62
	80"(2032mm)	NL2P-80-S	247.52	NL2F-80-S	326.98	341.55	359.89	396.57	421.23	436.77
Grooved — Painted Top Cap										
3"(76mm)	32"(813mm)	NL2P-32-G	\$199.81	NL2F-32-G	\$279.27	\$290.96	\$304.98	\$333.02	\$352.88	\$364.58
	42"(1067mm)	NL2P-42-G	205.61	NL2F-42-G	285.07	297.36	312.28	342.12	362.98	375.48
	48"(1219mm)	NL2P-48-G	209.09	NL2F-48-G	288.55	301.20	316.66	347.58	369.04	382.02
	53"(1346mm)	NL2P-53-G	211.99	NL2F-53-G	291.45	304.40	320.31	352.13	374.09	387.47
	58"(1473mm)	NL2P-58-G	214.89	NL2F-58-G	294.35	307.60	323.96	356.68	379.14	392.92
	64"(1626mm)	NL2P-64-G	218.37	NL2F-64-G	297.83	311.44	328.34	362.14	385.20	399.46
	80"(2032mm)	NL2P-80-G	253.36	NL2F-80-G	332.82	347.39	365.73	402.41	427.07	442.61
Wood Top Cap — Wood Group A										
3"(76mm)	32"(813mm)	NL2P-32-W	\$320.17	NL2F-32-W	\$399.63	\$411.32	\$425.34	\$453.38	\$473.24	\$484.94
	42"(1067mm)	NL2P-42-W	325.97	NL2F-42-W	405.43	417.72	432.64	462.48	483.34	495.84
	48"(1219mm)	NL2P-48-W	329.45	NL2F-48-W	408.91	421.56	437.02	467.94	489.40	502.38
	53"(1346mm)	NL2P-53-W	332.35	NL2F-53-W	411.81	424.76	440.67	472.49	494.45	507.83
	58"(1473mm)	NL2P-58-W	335.25	NL2F-58-W	414.71	427.96	444.32	477.04	499.50	513.28
	64"(1626mm)	NL2P-64-W	338.73	NL2F-64-W	418.19	431.80	448.70	482.50	505.56	519.82
	80"(2032mm)	NL2P-80-W	373.72	NL2F-80-W	453.18	467.75	486.09	522.77	547.43	562.97
Wood Top Cap — Wood Group B										
3"(76mm)	32"(813mm)	NL2P-32-W	\$342.37	NL2F-32-W	\$421.83	\$433.52	\$447.54	\$475.58	\$495.44	\$507.14
	42"(1067mm)	NL2P-42-W	348.17	NL2F-42-W	427.63	439.92	454.84	484.68	505.54	518.04
	48"(1219mm)	NL2P-48-W	351.65	NL2F-48-W	431.11	443.76	459.22	490.14	511.60	524.58
	53"(1346mm)	NL2P-53-W	354.55	NL2F-53-W	434.01	446.96	462.87	494.69	516.65	530.03
	58"(1473mm)	NL2P-58-W	357.45	NL2F-58-W	436.91	450.16	466.52	499.24	521.70	535.48
	64"(1626mm)	NL2P-64-W	360.93	NL2F-64-W	440.39	454.00	470.90	504.70	527.76	542.02
	80"(2032mm)	NL2P-80-W	395.92	NL2F-80-W	475.38	489.95	508.29	544.97	569.63	585.17








List price shown is with base raceway.

Panel Connectors and Trim Covers








2-Way 90°, Full-Height Connector with Full-Height Cover

Width	Height	Painted Cover Number ①	Trim B	Fabric Cover Number ①	Trim B Fabric Grade		C	E	F	G		
					A	B						
Standard — Painted Top Cap												
3”(76mm)	32”(813mm)	NL2P-32-S	■	\$199.67	NL2F-32-S	■	\$276.80	\$288.49	\$302.51	\$330.55	\$350.41	\$362.11
	42”(1067mm)	NL2P-42-S	■	208.97	NL2F-42-S	■	282.60	294.89	309.81	339.65	360.51	373.01
	48”(1219mm)	NL2P-48-S	■	214.55	NL2F-48-S	■	286.08	298.73	314.19	345.11	366.57	379.55
	53”(1346mm)	NL2P-53-S	■	219.20	NL2F-53-S	■	288.98	301.93	317.84	349.66	371.62	385.00
	58”(1473mm)	NL2P-58-S	■	223.85	NL2F-58-S	■	291.88	305.13	321.49	354.21	376.67	390.45
	64”(1626mm)	NL2P-64-S	■	229.43	NL2F-64-S	■	295.36	308.97	325.87	359.67	382.73	396.99
	80”(2032mm)	NL2P-80-S	■	270.02	NL2F-80-S	■	330.35	344.92	363.26	399.94	424.60	440.14
Grooved — Painted Top Cap												
3”(76mm)	32”(813mm)	NL2P-32-G	■	\$205.51	NL2F-32-G	■	\$282.64	\$294.33	\$308.35	\$336.39	\$356.25	\$367.95
	42”(1067mm)	NL2P-42-G	■	214.81	NL2F-42-G	■	288.44	300.73	315.65	345.49	366.35	378.85
	48”(1219mm)	NL2P-48-G	■	220.39	NL2F-48-G	■	291.92	304.57	320.03	350.95	372.41	385.39
	53”(1346mm)	NL2P-53-G	■	225.04	NL2F-53-G	■	294.82	307.77	323.68	355.50	377.46	390.84
	58”(1473mm)	NL2P-58-G	■	229.69	NL2F-58-G	■	297.72	310.97	327.33	360.05	382.51	396.29
	64”(1626mm)	NL2P-64-G	■	235.27	NL2F-64-G	■	301.20	314.81	331.71	365.51	388.57	402.83
	80”(2032mm)	NL2P-80-G	■	275.86	NL2F-80-G	■	336.19	350.76	369.10	405.78	430.44	445.98
Wood Top Cap — Wood Group A												
3”(76mm)	32”(813mm)	NL2P-32-W	■	\$324.75	NL2F-32-W	■	\$401.88	\$413.57	\$427.59	\$455.63	\$475.49	\$487.19
	42”(1067mm)	NL2P-42-W	■	334.05	NL2F-42-W	■	407.68	419.97	434.89	464.73	485.59	498.09
	48”(1219mm)	NL2P-48-W	■	339.63	NL2F-48-W	■	411.16	423.81	439.27	470.19	491.65	504.63
	53”(1346mm)	NL2P-53-W	■	344.28	NL2F-53-W	■	414.06	427.01	442.92	474.74	496.70	510.08
	58”(1473mm)	NL2P-58-W	■	348.93	NL2F-58-W	■	416.96	430.21	446.57	479.29	501.75	515.53
	64”(1626mm)	NL2P-64-W	■	354.51	NL2F-64-W	■	420.44	434.05	450.95	484.75	507.81	522.07
	80”(2032mm)	NL2P-80-W	■	395.10	NL2F-80-W	■	455.43	470.00	488.34	525.02	549.68	565.22
Wood Top Cap — Wood Group B												
3”(76mm)	32”(813mm)	NL2P-32-W	■	\$346.95	NL2F-32-W	■	\$424.08	\$435.77	\$449.79	\$477.83	\$497.69	\$509.39
	42”(1067mm)	NL2P-42-W	■	356.25	NL2F-42-W	■	429.88	442.17	457.09	486.93	507.79	520.29
	48”(1219mm)	NL2P-48-W	■	361.83	NL2F-48-W	■	433.36	446.01	461.47	492.39	513.85	526.83
	53”(1346mm)	NL2P-53-W	■	366.48	NL2F-53-W	■	436.26	449.21	465.12	496.94	518.90	532.28
	58”(1473mm)	NL2P-58-W	■	371.13	NL2F-58-W	■	439.16	452.41	468.77	501.49	523.95	537.73
	64”(1626mm)	NL2P-64-W	■	376.71	NL2F-64-W	■	442.64	456.25	473.15	506.95	530.01	544.27
	80”(2032mm)	NL2P-80-W	■	417.30	NL2F-80-W	■	477.63	492.20	510.54	547.22	571.88	587.42

List price shown is with base raceway.

		Wood Cover Number ❶	Wood Group A	Trim B	Wood Group B		
			Trim A		Trim A	Trim B	
Grooved — Painted Top Cap							
3”(76mm)	32”(813mm)	NL2W- 32-G 	\$398.47	\$401.84	\$401.97	\$405.34	
	42”(1067mm)	NL2W- 42-G 	404.27	407.64	407.77	411.14	
	48”(1219mm)	NL2W- 48-G 	407.75	411.12	411.25	414.62	
	53”(1346mm)	NL2W- 53-G 	410.65	414.02	414.15	417.52	
	58”(1473mm)	NL2W- 58-G 	413.55	416.92	417.05	420.42	
	64”(1626mm)	NL2W- 64-G 	417.03	420.40	420.53	423.90	
	80”(2032mm)	NL2W- 80-G 	452.02	455.39	455.52	458.89	


List price shown is with base raceway.

		Wood Cover Number ❶	Wood Group A Trim A	Trim B	Wood Group B Trim A	Trim B	
Wood Top Cap							
3”(76mm)	32”(813mm)	NL2W- 32-W 	\$518.83	\$521.08	\$544.53	\$546.78	
	42”(1067mm)	NL2W- 42-W 	524.63	526.88	550.33	552.58	
	48”(1219mm)	NL2W- 48-W 	528.11	530.36	553.81	556.06	
	53”(1346mm)	NL2W- 53-W 	531.01	533.26	556.71	558.96	
	58”(1473mm)	NL2W-58-W 	533.91	536.16	559.61	561.86	
	64”(1626mm)	NL2W-64-W 	537.39	539.64	563.09	565.34	
	80”(2032mm)	NL2W- 80-W 	572.38	574.63	598.08	600.33	


List price shown is with base raceway.

Panel Connectors and Trim Covers


2-Way 90°, Full-Height Connector with Pre-Configured (Sectional) Cover




Top View

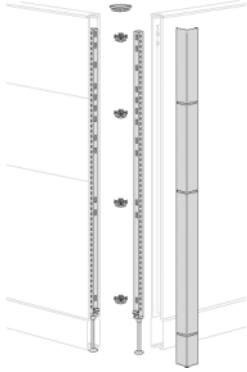

NS2P-SN NS2F-SN
NS2P-GN NS2F-GN
NS2P-WN NS2F-WN
NS2W-WN

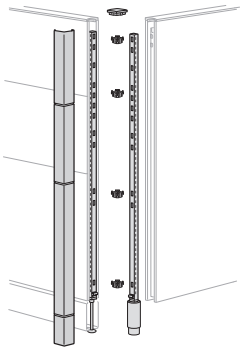

NS2P-S1 NS2F-S1
NS2P-G1 NS2F-G1
NS2P-W1 NS2F-W1
NS2W-W1



NS2P-S2 NS2F-S2
NS2P-G2 NS2F-G2
NS2P-W2 NS2F-W2
NS2W-W2

Features

- **Base raceway panel connector** includes top cap, light blocks, vertical cover, base raceway cover, leveling glides, carpet grippers, slotted connectors and corner connectors, with appropriate number of top cap to corner aligners.
- **Open base panel connector** includes top cap, light blocks, vertical cover, leveling glides, carpet grippers, slotted connectors and corner connectors with appropriate number of top cap to corner aligners, and appropriate number of connector sleeves.
- Connects 32"(813mm) high foundation elements, stack kits, or stack pads in a 2-way 90° intersection.
- Provides slots for mounting components.
- Connector reveal is standard in black finish color only.
- Connectors shipped assembled.
- Connector sleeves must be assembled onto the connector prior to panel installation.

Specification Tips

- When used to connect panel configurations of different heights in a 2-way 90° intersection, specify full-height connector to match the height of tallest panel configuration.
- When used to connect a stackable panel configuration with stack kit(s) or stack pad(s) in a 2-way 90° intersection, at a minimum specify full-height connector to match the height of tallest foundation element within the intersection. In addition, separately specify 2-way extended connectors for upper structure if applicable. Or specify full-height connector to match the height of the tallest panel configuration within the intersection. Refer to the specification guide for details.
- The vertical cover has a foundation height of 32"(813mm) and corresponding 16"(406mm) and 10"(254mm) high covers to equal the overall height specified.
- May be used in conjunction with 2-way extended connectors.
- Specify variable-height cover for exposed portion of connector that extends above the shorter panel.
- Specify **-(G_)** for **grooved option** if either panel top cap within the intersection is grooved.
- Specify **-(S_)** for **standard option** if both panel top caps within the intersection are standard.
- Specify **-(1 or 2)** for **open base option** to match the number of panels within the intersection which are open base.
- Specify **-(N)** for **base raceway option** if both panels within the intersection are standard base raceways.
- Standard connector top cap and the grooved connector top cap are aesthetically the same; smooth top cap surface without grooves.
- For open base application, specify trim color for upper connector sleeve. Lower sleeve is standard in black finish color only.

***Note:** Upcharge for mixed grade trim surfaces, refer to the electronic catalog for pricing.

To Order, Specify:

Standard or Grooved Top Cap w/Painted Cover

- 1) Product number.
- 2) Trim color for cover.*
- 3) Trim color for base raceway cover/upper connector sleeve(s).*
- 4) Trim color for top cap.*

Standard or Grooved Top Cap w/Fabric Cover

- 1) Product number.
- 2) Fabric/colorway for cover.
- 3) Trim color for base raceway cover/upper connector sleeve(s).*
- 4) Trim color for top cap.*

Grooved Top Cap w/Wood Cover

- 1) Product number.
- 2) Wood finish for cover.
- 3) Trim color for base raceway cover/upper connector sleeve(s).*
- 4) Trim color for top cap.*

Wood Top Cap w/Painted Cover

- 1) Product number.
- 2) Trim color for cover.*
- 3) Trim color for base raceway cover/upper connector sleeve(s).*
- 4) Wood finish for top cap.

Wood Top Cap w/Fabric Cover

- 1) Product number.
- 2) Fabric/colorway for cover.
- 3) Trim color for base raceway cover/upper connector sleeve(s).*
- 4) Wood finish for top cap.

Wood Top Cap w/Wood Cover

- 1) Product number.
- 2) Wood finish for cover.
- 3) Trim color for base raceway cover/upper connector sleeve(s).*
- 4) Wood finish for top cap.

① Base Raceway Specification

Base raceway option is available on 32"(813mm) – 80"(2032mm) high connectors. To specify a base raceway, place an **N** suffix as the **8th digit** in the product number.

Examples:

NS2P-42-SN = Standard top cap; two base raceway panels
NS2P-42-GN = Grooved top cap; two base raceway panels

Open Base Specification

































Open base option is available on 32"(813mm) – 80"(2032mm) high connectors. To specify open base, place a **1** for one open base panel as the **8th digit** in the product number and add **\$64.27** list, or a **2** for two open base panels as the **8th digit** in the product number and add **\$128.54** list.

Examples:

































NS2P-42-S1 = Standard top cap; one open base panel
NS2P-42-S2 = Standard top cap; two open base panels
NS2P-42-G1 = Grooved top cap; one open base panel
NS2P-42-G2 = Grooved top cap; two open base panels

Panel Connectors and Trim Covers

2-Way 90°, Full-Height Connector with Pre-Configured (Sectional) Cover

2" Polyurethane, Full Height, Cornerometer with 140° Beveled (Optional) Corner										
Width	Height	Painted Cover Number ①	Trim A	Fabric Cover Number ①	Trim A		C	E	F	G
					Fabric A	Grade B				
Standard — Painted Top Cap										
3"(76mm)	42"(1067mm)	NS2P-42-S 	\$252.36	NS2F-42-S 	\$331.82	\$344.11	\$359.03	\$388.87	\$409.73	\$422.23
	48"(1219mm)	NS2P-48-S 	255.84	NS2F-48-S 	335.30	347.95	363.41	394.33	415.79	428.77
	64"(1626mm)	NS2P-64-S 	265.12	NS2F-64-S 	344.58	358.19	375.09	408.89	431.95	446.21
	80"(2032mm)	NS2P-80-S 	300.11	NS2F-80-S 	379.57	394.14	412.48	449.16	473.82	489.36
Grooved — Painted Top Cap										
3"(76mm)	42"(1067mm)	NS2P-42-G 	\$258.20	NS2F-42-G 	\$337.66	\$349.95	\$364.87	\$394.71	\$415.57	\$428.07
	48"(1219mm)	NS2P-48-G 	261.68	NS2F-48-G 	341.14	353.79	369.25	400.17	421.63	434.61
	64"(1626mm)	NS2P-64-G 	270.96	NS2F-64-G 	350.42	364.03	380.93	414.73	437.79	452.05
	80"(2032mm)	NS2P-80-G 	305.95	NS2F-80-G 	385.41	399.98	418.32	455.00	479.66	495.20
Wood Top Cap — Wood Group A										
3"(76mm)	42"(1067mm)	NS2P-42-W 	\$378.56	NS2F-42-W 	\$458.02	\$470.31	\$485.23	\$515.07	\$535.93	\$548.43
	48"(1219mm)	NS2P-48-W 	382.04	NS2F-48-W 	461.50	474.15	489.61	520.53	541.99	554.97
	64"(1626mm)	NS2P-64-W 	391.32	NS2F-64-W 	470.78	484.39	501.29	535.09	558.15	572.41
	80"(2032mm)	NS2P-80-W 	426.31	NS2F-80-W 	505.77	520.34	538.68	575.36	600.02	615.56
Wood Top Cap — Wood Group B										
3"(76mm)	42"(1067mm)	NS2P-42-W 	\$400.76	NS2F-42-W 	\$480.22	\$492.51	\$507.43	\$537.27	\$558.13	\$570.63
	48"(1219mm)	NS2P-48-W 	404.24	NS2F-48-W 	483.70	496.35	511.81	542.73	564.19	577.17
	64"(1626mm)	NS2P-64-W 	413.52	NS2F-64-W 	492.98	506.59	523.49	557.29	580.35	594.61
	80"(2032mm)	NS2P-80-W 	448.51	NS2F-80-W 	527.97	542.54	560.88	597.56	622.22	637.76

List price shown is with base raceway.

Width	Height	Painted Cover Number ①	Trim B	Fabric Cover Number ①	Trim B		C	E	F	G
					Fabric A	Grade B				
Standard — Painted Top Cap										
3"(76mm)	42"(1067mm)	NS2P-42-S 	\$261.56	NS2F-42-S 	\$335.19	\$347.48	\$362.40	\$392.24	\$413.10	\$425.60
	48"(1219mm)	NS2P-48-S 	267.14	NS2F-48-S 	338.67	351.32	366.78	397.70	419.16	432.14
	64"(1626mm)	NS2P-64-S 	282.02	NS2F-64-S 	347.95	361.56	378.46	412.26	435.32	449.58
	80"(2032mm)	NS2P-80-S 	322.61	NS2F-80-S 	382.94	397.51	415.85	452.53	477.19	492.73
Grooved — Painted Top Cap										
3"(76mm)	42"(1067mm)	NS2P-42-G 	\$267.40	NS2F-42-G 	\$341.03	\$353.32	\$368.24	\$398.08	\$418.94	\$431.44
	48"(1219mm)	NS2P-48-G 	272.98	NS2F-48-G 	344.51	357.16	372.62	403.54	425.00	437.98
	64"(1626mm)	NS2P-64-G 	287.86	NS2F-64-G 	353.79	367.40	384.30	418.10	441.16	455.42
	80"(2032mm)	NS2P-80-G 	328.45	NS2F-80-G 	388.78	403.35	421.69	458.37	483.03	498.57
Wood Top Cap — Wood Group A										
3"(76mm)	42"(1067mm)	NS2P-42-W 	\$386.64	NS2F-42-W 	\$460.27	\$472.56	\$487.48	\$517.32	\$538.18	\$550.68
	48"(1219mm)	NS2P-48-W 	392.22	NS2F-48-W 	463.75	476.40	491.86	522.78	544.24	557.22
	64"(1626mm)	NS2P-64-W 	407.10	NS2F-64-W 	473.03	486.64	503.54	537.34	560.40	574.66
	80"(2032mm)	NS2P-80-W 	447.69	NS2F-80-W 	508.02	522.59	540.93	577.61	602.27	617.81
Wood Top Cap — Wood Group B										
3"(76mm)	42"(1067mm)	NS2P-42-W 	\$408.84	NS2F-42-W 	\$482.47	\$494.76	\$509.68	\$539.52	\$560.38	\$572.88
	48"(1219mm)	NS2P-48-W 	414.42	NS2F-48-W 	485.95	498.60	514.06	544.98	566.44	579.42
	64"(1626mm)	NS2P-64-W 	429.30	NS2F-64-W 	495.23	508.84	525.74	559.54	582.60	596.86
	80"(2032mm)	NS2P-80-W 	469.89	NS2F-80-W 	530.22	544.79	563.13	599.81	624.47	640.01

List price shown is with base raceway.

Panel Connectors and Trim Covers

2-Way 90°, Full-Height Connector with Pre-Configured (Sectional) Cover


		Wood Cover Number ①	Wood Group A Trim A	Trim B	Wood Group B Trim A	Trim B
Grooved — Painted Top Cap						
3"(76mm)	42"(1067mm)	NS2W-42-G	\$456.86	\$460.23	\$460.36	\$463.73
	48"(1219mm)	NS2W-48-G	460.34	463.71	463.84	467.21
	64"(1626mm)	NS2W-64-G	469.62	472.99	473.12	476.49
	80"(2032mm)	NS2W-80-G	504.61	507.98	508.11	511.48
Wood Top Cap						
3"(76mm)	42"(1067mm)	NS2W-42-W	\$577.22	\$579.47	\$602.92	\$605.17
	48"(1219mm)	NS2W-48-W	580.70	582.95	606.40	608.65
	64"(1626mm)	NS2W-64-W	589.98	592.23	615.68	617.93
	80"(2032mm)	NS2W-80-W	624.97	627.22	650.67	652.92

List price shown is with base raceway.


This page intentionally blank

Panel Connectors and Trim Covers


2-Way 90°, Extended Connector with Cover



Stack Kit Top View

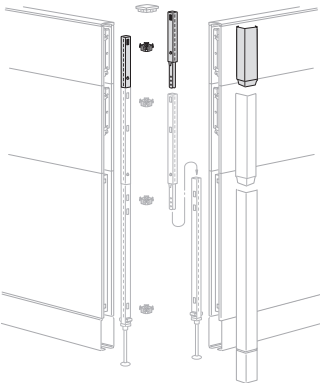

10" Connector

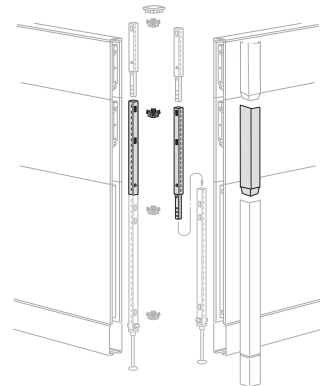

16" Connector

NX2P
NX2F
NX2W

Features

- Includes slotted connectors, light blocks, cover (no top cap) and corner connector.
- Connects stack kits in a 2-way condition.
- Provides slots for mounting components.
- Connector reveal is standard in black finish color only.
- Shipped unassembled.
- ◆ Available on RUSH.

Specification Tips

- Specify connector to match stack kit height.
- Must be used in conjunction with a 2-way 90° connector.
- Specify variable-height cover for exposed portion if connector extends above shorter panel.
- 10"(254mm) high connector can only be used at the top of a panel configuration. Will not accept additional connectors.
- **Cannot be used to attach foundation elements.**

To Order, Specify:

With Painted Cover

- 1) Product number.
- 2) Trim color for covers.

With Fabric Cover





- 1) Product number.
- 2) Fabric/colorway for covers.

With Wood Cover

- 1) Product number.
- 2) Wood finish for covers.

Panel Connectors and Trim Covers



2-Way 90°, Extended Connector with Cover

Width	Height	Painted Cover Number	Trim A	Trim B	Fabric Cover Number	Fabric Grade A	Fabric Grade B	C	E	F	G
3"(76mm)	10"(254mm)	NX2P-10 	\$245.39	\$264.09	NX2F-10 	\$294.46	\$301.47	\$310.82	\$328.35	\$340.03	\$347.04
	16"(406mm)	NX2P-16 	254.74	273.44	NX2F-16 	330.69	337.70	347.05	364.58	376.26	383.27


Width	Height	Wood Cover Number	Wood Group A	Wood Group B
3"(76mm)	10"(254mm)	NX2W-10	\$379.75	\$404.29
	16"(406mm)	NX2W-16	461.54	486.08

Panel Connectors and Trim Covers


2-Way 120°, Full-Height Connector with Full-Height Cover



NLAP-SN
NLAF-SN
NLAP-GN
NLAF-GN

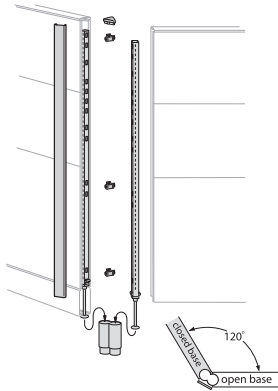

NLAP-S1
NLAF-S1
NLAP-G1
NLAF-G1

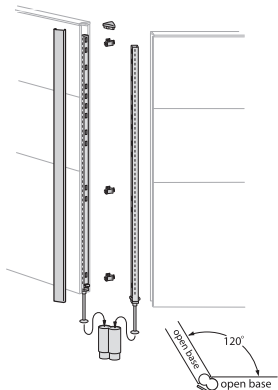

NLAP-S2
NLAF-S2
NLAP-G2
NLAF-G2

Features

- **Base raceway panel connector** includes top cap, light blocks, vertical cover, base raceway cover, leveling glides, carpet grippers, slotted connectors and corner connectors, with appropriate number of top cap to corner aligners.
- **Open base panel connector** includes top cap, light blocks, vertical cover, leveling glides, carpet grippers, slotted connectors and corner connectors with appropriate number of top cap to corner aligners, and appropriate number of connector sleeves.
- Connects foundation elements, stack kits, or stack pads in a 2-way 120° intersection.
- Provides slots for mounting components.
- Connector reveal is standard in black finish color only.
- Connectors shipped assembled.
- Connector sleeves must be assembled onto the connector prior to panel installation.

Specification Tips

- **When used to connect monolithic panels of different heights in a 2-way 120° intersection, specify full-height connector to match the height of tallest panel.**
- **When used to connect a stackable panel configuration with stack kit(s) or stack pad(s) in a 2-way 120° intersection specify, full-height connector to match the height of tallest panel.**
- Specify variable-height cover for exposed portion of connector that extends above the shorter panel.
- **May not be used with extended connectors.**
- Connector assembly must be replaced to convert to an in-line, or 90° condition.
- Specify **-(G_) for grooved option** if either panel top cap within the intersection is grooved.
- Specify **-(S_) for standard option** if both panel top caps within the intersection are standard.
- Specify **-(1 or 2) for open base option** to match the number of panels within the intersection which are open base.
- Specify **-(N) for base raceway option** if both panels within the intersection are standard base raceways.
- Standard connector top cap and the grooved connector top cap are aesthetically the same; smooth top cap surface without grooves.
- For open base application, specify trim color for upper connector sleeve. Lower sleeve is standard in black finish color only.
- **58" panel connector allows for the following stack configurations:**
 - 32" foundation element with 10" and 16" stack kit. (NOTE: 10" stack kit can be above or below the 16" stack kit.)
 - 42" foundation element with 16" stack
 - 48" foundation element with 10" stack
- Heights will not line-up using 58" height configuration when a 32" foundation element is used.

To Order, Specify:

Standard or Grooved Top Cap w/Painted Cover

- 1) Product number.
- 2) Trim color for cover.*
- 3) Trim color for base raceway cover/upper connector sleeve(s).*
- 4) Trim color for top cap.*

Standard or Grooved Top Cap w/Fabric Cover

- 1) Product number.
- 2) Fabric/colorway for cover.
- 3) Trim color for base raceway cover/upper connector sleeve(s).*
- 4) Trim color for top cap.*

① Base Raceway Specification

Base raceway option is available on 32"(813mm) – 80"(2032mm) high connectors. To specify a base raceway, place an **N** suffix as the **8th digit** in the product number.

Examples:

NLAP-42-SN = Standard top cap; two base raceway panels
NLAP-42-GN = Grooved top cap; two base raceway panels

Open Base Specification

Open base option is available on 32"(813mm) – 80"(2032mm) high connectors. To specify open base, place a **1** for one open base panel add **\$64.27**, or a **2** for two open base panels as the **8th digit** in the product number and add **\$128.54** list.

























Examples:

NLAP-42-S1 = Standard top cap; one open base panel
NLAP-42-S2 = Standard top cap; two open base panels
NLAP-42-G1 = Grooved top cap; one open base panel
NLAP-42-G2 = Grooved top cap; two open base panels

























***Note:** Upcharge for mixed grade trim surfaces, refer to the electronic catalog for pricing.

Panel Connectors and Trim Covers

2-Way 120°, Full-Height Connector with Full-Height Cover

				Trim A						
Width	Height	Painted Cover Number ①	Trim A	Fabric Cover Number ①	Fabric Grade A	B	C	E	F	G
Standard — Painted Top Cap										
3"(76mm)	32"(813mm)	NLAP-32-S 	\$394.96	NLAF-32-S 	\$557.38	\$581.92	\$608.80	\$668.40	\$708.13	\$732.67
	42"(1067mm)	NLAP-42-S 	406.06	NLAF-42-S 	568.48	593.62	621.40	682.80	723.53	748.87
	48"(1219mm)	NLAP-48-S 	412.72	NLAF-48-S 	575.14	600.64	628.96	691.44	732.77	758.59
	53"(1346mm)	NLAP-53-S 	418.27	NLAF-53-S 	580.69	606.49	635.26	698.64	740.47	766.69
	64"(1626mm)	NLAP-64-S 	430.48	NLAF-64-S 	592.90	619.36	649.12	714.48	757.41	784.51
	80"(2032mm)	NLAP-80-S 	492.64	NLAF-80-S 	655.06	682.48	713.68	781.92	826.45	854.83
Grooved — Painted Top Cap										
3"(76mm)	32"(813mm)	NLAP-32-G 	\$400.80	NLAF-32-G 	\$563.22	\$587.76	\$614.64	\$674.24	\$713.97	\$738.51
	42"(1067mm)	NLAP-42-G 	411.90	NLAF-42-G 	574.32	599.46	627.24	688.64	729.37	754.71
	48"(1219mm)	NLAP-48-G 	418.56	NLAF-48-G 	580.98	606.48	634.80	697.28	738.61	764.43
	53"(1346mm)	NLAP-53-G 	424.11	NLAF-53-G 	586.53	612.33	641.10	704.48	746.31	772.53
	64"(1626mm)	NLAP-64-G 	436.32	NLAF-64-G 	598.74	625.20	654.96	720.32	763.25	790.35
	80"(2032mm)	NLAP-80-G 	498.48	NLAF-80-G 	660.90	688.32	719.52	787.76	832.29	860.67


List price shown is with base raceway.

Width	Height	Painted Cover Number ①	Trim B	Fabric Cover Number ①	Trim B Fabric Grade		C	E	F	G
					A	B				
Standard — Painted Top Cap										
3”(76mm)	32”(813mm)	NLAP-32-S 	\$399.54	NLAF-32-S 	\$559.63	\$584.17	\$611.05	\$670.65	\$710.38	\$734.92
	42”(1067mm)	NLAP-42-S 	414.14	NLAF-42-S 	570.73	595.87	623.65	685.05	725.78	751.12
	48”(1219mm)	NLAP-48-S 	422.90	NLAF-48-S 	577.39	602.89	631.21	693.69	735.02	760.84
	53”(1346mm)	NLAP-53-S 	430.20	NLAF-53-S 	582.94	608.74	637.51	700.89	742.72	768.94
	64”(1626mm)	NLAP-64-S 	446.26	NLAF-64-S 	595.15	621.61	651.37	716.73	759.66	786.76
	80”(2032mm)	NLAP-80-S 	514.02	NLAF-80-S 	657.31	684.73	715.93	784.17	828.70	857.08
Grooved — Painted Top Cap										
3”(76mm)	32”(813mm)	NLAP-32-G 	\$405.38	NLAF-32-G 	\$565.47	\$590.01	\$616.89	\$676.49	\$716.22	\$740.76
	42”(1067mm)	NLAP-42-G 	419.98	NLAF-42-G 	576.57	601.71	629.49	690.89	731.62	756.96
	48”(1219mm)	NLAP-48-G 	428.74	NLAF-48-G 	583.23	608.73	637.05	699.53	740.86	766.68
	53”(1346mm)	NLAP-53-G 	436.04	NLAF-53-G 	588.78	614.58	643.35	706.73	748.56	774.78
	64”(1626mm)	NLAP-64-G 	452.10	NLAF-64-G 	600.99	627.45	657.21	722.57	765.50	792.60
	80”(2032mm)	NLAP-80-G 	519.86	NLAF-80-G 	663.15	690.57	721.77	790.01	834.54	862.92


List price shown is with base raceway.

Panel Connectors and Trim Covers


3-Way 90°, Full-Height Connector with Full-Height Cover




Top View



NL3P-SN NL3F-SN
NL3P-GN NL3F-GN NL3W-GN
NL3P-WN NL3F-WN NL3W-WN

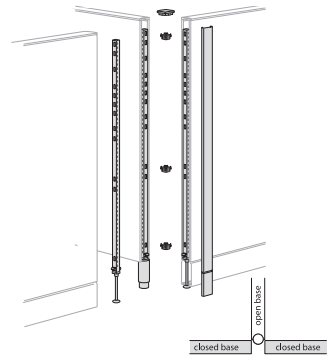

NL3P-S1 NL3F-S1
NL3P-G1 NL3F-G1 NL3W-G1
NL3P-W1 NL3F-W1 NL3W-W1

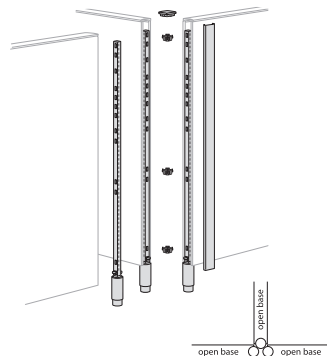

NL3P-S3 NL3F-S3
NL3P-G3 NL3F-G3 NL3W-G3
NL3P-W3 NL3F-W3 NL3W-W3

Features

- **Base raceway panel connector** includes top cap, light blocks, vertical cover, base raceway cover, leveling glides, carpet grippers, slotted connectors and corner connectors, with appropriate number of top cap to corner aligners.
- **Open base panel connector** includes top cap, light blocks, vertical cover, leveling glides, carpet grippers, slotted connectors and corner connectors with appropriate number of top cap to corner aligners, and appropriate number of connector sleeves.
- Connects foundation elements, stack kits, or stack pads in a 3-way 90° intersection.
- Provides slots for mounting components.
- Connector reveal is standard in black finish color only.
- Connectors shipped assembled.
- Connector sleeves must be assembled onto the connector prior to panel installation.
- ◆ Available on RUSH.

Specification Tips

- When used to connect panel configurations of different heights in a 3-way 90° intersection, specify full-height connector to match the height of tallest panel configuration.
- When used to connect a stackable panel configuration with stack kit(s) or stack pad(s) in a 3-way 90° intersection, at a minimum specify full-height connector to match the height of tallest foundation element within the intersection. In addition, separately specify 3-way extended connectors for upper structure if applicable. Or specify full-height connector to match the height of the tallest panel configuration within the intersection. Refer to the specification guide for details.
- May be used in conjunction with 3-way extended connectors.
- Specify variable-height cover for each exposed side of the connector that extends above the lowest panels.
- Specify **-(G_)** for **grooved option** if any panel top cap within the intersection is grooved.
- Specify **-(S_)** for **standard option** if all panel top caps within the intersection are standard.
- Specify **-(1, 2 or 3)** for **open base option** to match the number of panels within the intersection which are open base.
- Specify **-(N)** for **base raceway option** if all panels within the intersection are standard base raceways.
- Standard connector top cap and the grooved connector top cap are aesthetically the same; smooth top cap surface without grooves.
- For open base application, specify trim color for upper connector sleeve. Lower sleeve is standard in black finish color only.
- **58" panel connector allows for the following stack configurations:**
 - 32" foundation element with 10" and 16" stack kit. (NOTE: 10" stack kit can be above or below the 16" stack kit.)
 - 42" foundation element with 16" stack
 - 48" foundation element with 10" stack
- For segmented trim applications, specify covers separately through eParts.
- Heights will not line-up using 58" height configuration when a 32" foundation element is used.

Base Raceway Specification

Base raceway option is available on 32"(813mm) – 80"(2032mm) high connectors. To specify a base raceway, place an **N** suffix as the **8th digit** in the product number.

Example:

NL3P-42-SN = Standard top cap; three base raceway panels
NL3P-42-GN = Grooved top cap; three base raceway panels

***Note:** Upcharge for mixed grade trim surfaces, refer to the electronic catalog for pricing.

To Order, Specify:

Standard or Grooved Top Cap w/Painted Cover

- 1) Product number.
- 2) Trim color for cover.*
- 3) Trim color for base raceway cover/upper connector sleeve(s).*
- 4) Trim color for top cap.*

Standard or Grooved Top Cap w/Fabric Cover

- 1) Product number.
- 2) Fabric/colorway for cover.
- 3) Trim color for base raceway cover/upper connector sleeve(s).*
- 4) Trim color for top cap.*

Grooved Top Cap w/Wood Cover

- 1) Product number.
- 2) Wood finish for cover.
- 3) Trim color for base raceway cover/upper connector sleeve(s).*
- 4) Trim color for top cap.*

Wood Top Cap w/Painted Cover

- 1) Product number.
- 2) Trim color for cover.*
- 3) Trim color for base raceway cover/upper connector sleeve(s).*
- 4) Wood finish for top cap.

Wood Top Cap w/Fabric Cover

- 1) Product number.
- 2) Fabric/colorway for cover.
- 3) Trim color for base raceway cover/upper connector sleeve(s).*
- 4) Wood finish for top cap.

Wood Top Cap w/Wood Cover

- 1) Product number.
- 2) Wood finish for cover.
- 3) Trim color for base raceway cover/upper connector sleeve(s).*
- 4) Wood finish for top cap.

1 Base Raceway Specification

Base raceway option is available on 32"(813mm) – 80"(2032mm) high connectors. To specify a base raceway, place an **N** suffix as the **8th digit** in the product number.

Examples:

NLAP-42-SN = Standard top cap; two base raceway panels
NLAP-42-GN = Grooved top cap; two base raceway panels

Open Base Specification Open Base Specification

Open base option is available on 32"(813mm) – 80"(2032mm) high connectors. To specify open base, place a **1** for one open base panel as the **8th digit** in the product number and add **\$64.27** list, or **2** for two open base panels as the **8th digit** in the product number and add **\$128.54** list, or **3** for three open base panels as the **8th digit** in the product number and add **\$192.81** list.

Examples:

NL3P-42-S1 = Standard top cap; one open base panel
NL3P-42-S2 = Standard top cap; two open base panels
NL3P-42-S3 = Standard top cap; three open base panels
NL3P-42-G1 = Grooved top cap; one open base panel
NL3P-42-G2 = Grooved top cap; two open base panels
NL3P-42-G3 = Grooved top cap; three open base panels

Panel Connectors and Trim Covers























































3-Way 90°, Full-Height Connector with Full-Height Cover

Width	Height	Painted Cover Number ①	Trim A	Fabric Cover Number ①	Trim A Fabric Grade		C	E	F	G	
					A	B					
Standard — Painted Top Cap											
3"(76mm)	32"(813mm)	NL3P-32-S	◆ \$294.47	NL3F-32-S	◆ \$369.25	\$380.94	\$392.63	\$420.67	\$439.37	\$449.89	
	42"(1067mm)	NL3P-42-S	◆ 302.57	NL3F-42-S	◆ 377.35	389.34	401.43	430.37	449.67	460.49	
	48"(1219mm)	NL3P-48-S	◆ 307.43	NL3F-48-S	◆ 382.21	394.38	406.71	436.19	455.85	466.85	
	53"(1346mm)	NL3P-53-S	◆ 311.48	NL3F-53-S	◆ 386.26	398.58	411.11	441.04	461.00	472.15	
	58"(1473mm)	NL3P-58-S	◆ 315.53	NL3F-58-S	◆ 390.31	402.78	415.51	445.89	466.15	477.45	
	64"(1626mm)	NL3P-64-S	◆ 320.39	NL3F-64-S	◆ 395.17	407.82	420.79	451.71	472.33	483.81	
	80"(2032mm)	NL3P-80-S	◆ 359.06	NL3F-80-S	◆ 433.84	446.97	460.58	492.94	514.52	526.48	
Grooved — Painted Top Cap											
3"(76mm)	32"(813mm)	NL3P-32-G	◆ \$300.31	NL3F-32-G	◆ \$375.09	\$386.78	\$398.47	\$426.51	\$445.21	\$455.73	
	42"(1067mm)	NL3P-42-G	◆ 308.41	NL3F-42-G	◆ 383.19	395.18	407.27	436.21	455.51	466.33	
	48"(1219mm)	NL3P-48-G	◆ 313.27	NL3F-48-G	◆ 388.05	400.22	412.55	442.03	461.69	472.69	
	53"(1346mm)	NL3P-53-G	◆ 317.32	NL3F-53-G	◆ 392.10	404.42	416.95	446.88	466.84	477.99	
	58"(1473mm)	NL3P-58-G	◆ 321.37	NL3F-58-G	◆ 396.15	408.62	421.35	451.73	471.99	483.29	
	64"(1626mm)	NL3P-64-G	◆ 326.23	NL3F-64-G	◆ 401.01	413.66	426.63	457.55	478.17	489.65	
	80"(2032mm)	NL3P-80-G	◆ 364.90	NL3F-80-G	◆ 439.68	452.81	466.42	498.78	520.36	532.32	
Wood Top Cap — Wood Group A											
3"(76mm)	32"(813mm)	NL3P-32-W	\$420.67	NL3F-32-W	\$495.45	\$507.14	\$518.83	\$546.87	\$565.57	\$576.09	
	42"(1067mm)	NL3P-42-W	428.77	NL3F-42-W	503.55	515.54	527.63	556.57	575.87	586.69	
	48"(1219mm)	NL3P-48-W	433.63	NL3F-48-W	508.41	520.58	532.91	562.39	582.05	593.05	
	53"(1346mm)	NL3P-53-W	437.68	NL3F-53-W	512.46	524.78	537.31	567.24	587.20	598.35	
	58"(1473mm)	NL3P-58-W	441.73	NL3F-58-W	516.51	528.98	541.71	572.09	592.35	603.65	
	64"(1626mm)	NL3P-64-W	446.59	NL3F-64-W	521.37	534.02	546.99	577.91	598.53	610.01	
	80"(2032mm)	NL3P-80-W	485.26	NL3F-80-W	560.04	573.17	586.78	619.14	640.72	652.68	
Wood Top Cap — Wood Group B											
3"(76mm)	32"(813mm)	NL3P-32-W	\$442.87	NL3F-32-W	\$517.65	\$529.34	\$541.03	\$569.07	\$587.77	\$598.29	
	42"(1067mm)	NL3P-42-W	450.97	NL3F-42-W	525.75	537.74	549.83	578.77	598.07	608.89	
	48"(1219mm)	NL3P-48-W	455.83	NL3F-48-W	530.61	542.78	555.11	584.59	604.25	615.25	
	53"(1346mm)	NL3P-53-W	459.88	NL3F-53-W	534.66	546.98	559.51	589.44	609.40	620.55	
	58"(1473mm)	NL3P-58-W	463.93	NL3F-58-W	538.71	551.18	563.91	594.29	614.55	625.85	
	64"(1626mm)	NL3P-64-W	468.79	NL3F-64-W	543.57	556.22	569.19	600.11	620.73	632.21	
	80"(2032mm)	NL3P-80-W	507.46	NL3F-80-W	582.24	595.37	608.98	641.34	662.92	674.88	

List price shown is with base raceway.

Panel Connectors and Trim Covers

3-Way 90°, Full-Height Connector with Full-Height Cover

Width	Height	Painted Cover Number ①	Trim B	Fabric Cover Number ①	Trim B Fabric Grade		C	E	F	G
					A	B				
Standard — Painted Top Cap										
3"(76mm)	32"(813mm)	NL3P-32-S 	\$299.01	NL3F-32-S 	\$372.62	\$384.31	\$396.00	\$424.04	\$442.74	\$453.26
	42"(1067mm)	NL3P-42-S 	308.31	NL3F-42-S 	380.72	392.71	404.80	433.74	453.04	463.86
	48"(1219mm)	NL3P-48-S 	313.89	NL3F-48-S 	385.58	397.75	410.08	439.56	459.22	470.22
	53"(1346mm)	NL3P-53-S 	318.54	NL3F-53-S 	389.63	401.95	414.48	444.41	464.37	475.52
	58"(1473mm)	NL3P-58-S 	323.19	NL3F-58-S 	393.68	406.15	418.88	449.26	469.52	480.82
	64"(1626mm)	NL3P-64-S 	328.77	NL3F-64-S 	398.54	411.19	424.16	455.08	475.70	487.18
	80"(2032mm)	NL3P-80-S 	369.36	NL3F-80-S 	437.21	450.34	463.95	496.31	517.89	529.85
Grooved — Painted Top Cap										
3"(76mm)	32"(813mm)	NL3P-32-G 	\$304.85	NL3F-32-G 	\$378.46	\$390.15	\$401.84	\$429.88	\$448.58	\$459.10
	42"(1067mm)	NL3P-42-G 	314.15	NL3F-42-G 	386.56	398.55	410.64	439.58	458.88	469.70
	48"(1219mm)	NL3P-48-G 	319.73	NL3F-48-G 	391.42	403.59	415.92	445.40	465.06	476.06
	53"(1346mm)	NL3P-53-G 	324.38	NL3F-53-G 	395.47	407.79	420.32	450.25	470.21	481.36
	58"(1473mm)	NL3P-58-G 	329.03	NL3F-58-G 	399.52	411.99	424.72	455.10	475.36	486.66
	64"(1626mm)	NL3P-64-G 	334.61	NL3F-64-G 	404.38	417.03	430.00	460.92	481.54	493.02
	80"(2032mm)	NL3P-80-G 	375.20	NL3F-80-G 	443.05	456.18	469.79	502.15	523.73	535.69
Wood Top Cap — Wood Group A										
3"(76mm)	32"(813mm)	NL3P-32-W 	\$424.09	NL3F-32-W 	\$497.70	\$509.39	\$521.08	\$549.12	\$567.82	\$578.34
	42"(1067mm)	NL3P-42-W 	433.39	NL3F-42-W 	505.80	517.79	529.88	558.82	578.12	588.94
	48"(1219mm)	NL3P-48-W 	438.97	NL3F-48-W 	510.66	522.83	535.16	564.64	584.30	595.30
	53"(1346mm)	NL3P-53-W 	443.62	NL3F-53-W 	514.71	527.03	539.56	569.49	589.45	600.60
	58"(1473mm)	NL3P-58-W 	448.27	NL3F-58-W 	518.76	531.23	543.96	574.34	594.60	605.90
	64"(1626mm)	NL3P-64-W 	453.85	NL3F-64-W 	523.62	536.27	549.24	580.16	600.78	612.26
	80"(2032mm)	NL3P-80-W 	494.44	NL3F-80-W 	562.29	575.42	589.03	621.39	642.97	654.93
Wood Top Cap — Wood Group B										
3"(76mm)	32"(813mm)	NL3P-32-W 	\$446.29	NL3F-32-W 	\$519.90	\$531.59	\$543.28	\$571.32	\$590.02	\$600.54
	42"(1067mm)	NL3P-42-W 	455.59	NL3F-42-W 	528.00	539.99	552.08	581.02	600.32	611.14
	48"(1219mm)	NL3P-48-W 	461.17	NL3F-48-W 	532.86	545.03	557.36	586.84	606.50	617.50
	53"(1346mm)	NL3P-53-W 	465.82	NL3F-53-W 	536.91	549.23	561.76	591.69	611.65	622.80
	58"(1473mm)	NL3P-58-W 	470.47	NL3F-58-W 	540.96	553.43	566.16	596.54	616.80	628.10
	64"(1626mm)	NL3P-64-W 	476.05	NL3F-64-W 	545.82	558.47	571.44	602.36	622.98	634.46
	80"(2032mm)	NL3P-80-W	516.64	NL3F-80-W	584.49	597.62	611.23	643.59	665.17	677.13

List price shown is with base raceway.

Panel Connectors and Trim Covers


3-Way 90°, Full-Height Connector with Full-Height Cover

		Wood Cover Number ①	Wood Group A Trim A	Trim B	Wood Group B Trim A	Trim B
Grooved — Painted Top Cap						
3"(76mm)	32"(813mm)	NL3W- 32-G	\$491.96	\$495.33	\$495.46	\$498.83
	42"(1067mm)	NL3W- 42-G	500.06	503.43	503.56	506.93
	48"(1219mm)	NL3W- 48-G	504.92	508.29	508.42	511.79
	53"(1346mm)	NL3W- 53-G	508.97	512.34	512.47	515.84
	58"(1473mm)	NL3W- 58-G	513.02	516.39	516.52	519.89
	64"(1626mm)	NL3W- 64-G	517.88	521.25	521.38	524.75
	80"(2032mm)	NL3W- 80-G	556.55	559.92	560.05	563.42
Wood Top Cap						
3"(76mm)	32"(813mm)	NL3W-32-W	\$612.32	\$614.57	\$638.02	\$640.27
	42"(1067mm)	NL3W- 42-W	620.42	622.67	646.12	648.37
	48"(1219mm)	NL3W-48-W	625.28	627.53	650.98	653.23
	53"(1346mm)	NL3W-53-W	629.33	631.58	655.03	657.28
	58"(1473mm)	NL3W- 58-W	633.38	635.63	659.08	661.33
	64"(1626mm)	NL3W- 64-W	638.24	640.49	663.94	666.19
	80"(2032mm)	NL3W- 80-W	676.91	679.16	702.61	704.86


List price shown is with base raceway.

Panel Connectors and Trim Covers


3-Way 90°, Full-Height Connector with Pre-Configured (Sectional) Cover




Top View



NS3P-SN NS3P-GN NS3P-WN
NS3F-SN NS3F-GN NS3F-WN
NS3W-GN NS3W-WN



NS3P-S1 NS3P-G1 NS3P-W1
NS3F-S1 NS3F-G1 NS3F-W1
NS3W-G1 NS3W-W1



NS3P-S3 NS3P-G3 NS3P-W3
NS3F-S3 NS3F-G3 NS3F-W3
NS3W-G3 NS3W-W3

Features

- **Base raceway panel connector** includes top cap, light blocks, vertical cover, base raceway cover, leveling glides, carpet grippers, slotted connectors and corner connectors, with appropriate number of top cap to corner aligners.
- **Open base panel connector** includes top cap, light blocks, vertical cover, leveling glides, carpet grippers, slotted connectors and corner connectors with appropriate number of top cap to corner aligners, and appropriate number of connector sleeves.
- Connects foundation elements, stack kits, or stack pads in a 3-way 90° intersection.
- Provides slots for mounting components.
- Connector reveal is standard in black finish color only.
- Connectors shipped assembled.
- Connector sleeves must be assembled onto the connector prior to panel installation.

Specification Tips

- When used to connect panel configurations of different heights in a 3-way 90° intersection, specify full-height connector to match the height of tallest panel configuration.
- When used to connect a stackable panel configuration with stack kit(s) or stack pad(s) in a 3-way 90° intersection, at a minimum specify full-height connector to match the height of tallest foundation element within the intersection. In addition, separately specify 3-way extended connectors for upper structure if applicable. Or specify full-height connector to match the height of the tallest panel configuration within the intersection. Refer to the specification guide for details.
- The vertical cover has a foundation height of 32"(813mm) and corresponding 16"(406mm) and 10"(254mm) high covers to equal the overall height specified.
- May be used in conjunction with 3-way extended connectors.
- Specify variable-height cover for each exposed side of the connector that extends above the lowest panel(s).
- Specify **-(G_)** for grooved option if any panel top cap within the intersection is grooved.
- Specify **-(S_)** for standard option if all panel top caps within the intersection are standard.
- Specify **-(1, 2 or 3)** for open base option to match the number of panels within the intersection which are open base.
- Specify **-(N)** for base raceway option if all panels within the intersection are standard base raceways.
- Standard connector top cap and the grooved connector top cap are aesthetically the same; smooth top cap surface without grooves.
- For open base application, specify trim color for upper connector sleeve. Lower sleeve is standard in black finish color only.

***Note:** Upcharge for mixed grade trim surfaces, refer to the electronic catalog for pricing.

To Order, Specify:

Standard or Grooved Top Cap w/Painted Cover

- 1) Product number.
- 2) Trim color for cover.*
- 3) Trim color for base raceway cover/upper connector sleeve(s).*
- 4) Trim color for top cap.*

Standard or Grooved Top Cap w/Fabric Cover

- 1) Product number.
- 2) Fabric/colorway for cover.
- 3) Trim color for base raceway cover/upper connector sleeve(s).*
- 4) Trim color for top cap.*

Grooved Top Cap w/Wood Cover

- 1) Product number.
- 2) Wood finish for cover.
- 3) Trim color for base raceway cover/upper connector sleeve(s).*
- 4) Trim color for top cap.*

Wood Top Cap w/Painted Cover

- 1) Product number.
- 2) Trim color for cover.*
- 3) Trim color for base raceway cover/upper connector sleeve(s).*
- 4) Wood finish for top cap.

Wood Top Cap w/Fabric Cover

- 1) Product number.
- 2) Fabric/colorway for cover.
- 3) Trim color for base raceway cover/upper connector sleeve(s).*
- 4) Wood finish for top cap.

Wood Top Cap w/Wood Cover

- 1) Product number.
- 2) Wood finish for cover.
- 3) Trim color for base raceway cover/upper connector sleeve(s).*
- 4) Wood finish for top cap.

① Base Raceway Specification

Base raceway option is available on 32"(813mm) – 80"(2032mm) high connectors. To specify a base raceway, place an **N** suffix as the **8th digit** in the product number.

Examples:

NS3P-42-SN = Standard top cap; three base raceway panels
NS3P-42-GN = Grooved top cap; three base raceway panels

Open Base Specification

































Open base option is available on 32"(813mm) – 80"(2032mm) high connectors. To specify open base, place a **1** for one open base panel as the **8th digit** in the product number and add **\$64.27** list, or **2** for two open base panels as the **8th digit** in the product number and add **\$128.54** list, or **3** for three open base panels as the **8th digit** in the product number and add **\$192.81** list.

Examples:

































NS3P-42-S1 = Standard top cap; one open base panel
NS3P-42-S2 = Standard top cap; two open base panels
NS3P-42-S3 = Standard top cap; three open base panels
NS3P-42-G1 = Grooved top cap; one open base panel
NS3P-42-G2 = Grooved top cap; two open base panels
NS3P-42-G3 = Grooved top cap; three open base panels

Panel Connectors and Trim Covers

3-Way 90°, Full-Height Connector with Pre-Configured (Sectional) Cover

Width	Height	Painted Cover Number ①	Trim A	Fabric Cover Number ①	Trim A		C	E	F	G
					Fabric Grade A	B				
Standard — Painted Top Cap										
3"(76mm)	42"(1067mm)	NS3P-42-S 	\$359.83	NS3F-42-S 	\$434.61	\$446.60	\$458.69	\$487.63	\$506.93	\$517.75
	48"(1219mm)	NS3P-48-S 	364.69	NS3F-48-S 	439.47	451.64	463.97	493.45	513.11	524.11
	64"(1626mm)	NS3P-64-S 	377.65	NS3F-64-S 	452.43	465.08	478.05	508.97	529.59	541.07
	80"(2032mm)	NS3P-80-S 	435.02	NS3F-80-S 	509.80	522.93	536.54	568.90	590.48	602.44
Grooved — Painted Top Cap										
3"(76mm)	42"(1067mm)	NS3P-42-G 	\$365.67	NS3F-42-G 	\$440.45	\$452.44	\$464.53	\$493.47	\$512.77	\$523.59
	48"(1219mm)	NS3P-48-G 	370.53	NS3F-48-G 	445.31	457.48	469.81	499.29	518.95	529.95
	64"(1626mm)	NS3P-64-G 	383.49	NS3F-64-G 	458.27	470.92	483.89	514.81	535.43	546.91
	80"(2032mm)	NS3P-80-G 	440.86	NS3F-80-G 	515.64	528.77	542.38	574.74	596.32	608.28
Wood Top Cap — Wood Group A										
3"(76mm)	42"(1067mm)	NS3P-42-W 	\$486.03	NS3F-42-W 	\$560.81	\$572.80	\$584.89	\$613.83	\$633.13	\$643.95
	48"(1219mm)	NS3P-48-W 	490.89	NS3F-48-W 	565.67	577.84	590.17	619.65	639.31	650.31
	64"(1626mm)	NS3P-64-W 	503.85	NS3F-64-W 	578.63	591.28	604.25	635.17	655.79	667.27
	80"(2032mm)	NS3P-80-W 	561.22	NS3F-80-W 	636.00	649.13	662.74	695.10	716.68	728.64
Wood Top Cap — Wood Group B										
3"(76mm)	42"(1067mm)	NS3P-42-W 	\$508.23	NS3F-42-W 	\$583.01	\$595.00	\$607.09	\$636.03	\$655.33	\$666.15
	48"(1219mm)	NS3P-48-W 	513.09	NS3F-48-W 	587.87	600.04	612.37	641.85	661.51	672.51
	64"(1626mm)	NS3P-64-W 	526.05	NS3F-64-W 	600.83	613.48	626.45	657.37	677.99	689.47
	80"(2032mm)	NS3P-80-W 	583.42	NS3F-80-W 	658.20	671.33	684.94	717.30	738.88	750.84

List price shown is with base raceway.

Width	Height	Painted Cover Number ①	Trim B	Fabric Cover Number ①	Trim B		C	E	F	G
					Fabric Grade A	B				
Standard — Painted Top Cap										
3"(76mm)	42"(1067mm)	NS3P-42-S 	\$365.57	NS3F-42-S 	\$437.98	\$449.97	\$462.06	\$491.00	\$510.30	\$521.12
	48"(1219mm)	NS3P-48-S 	371.15	NS3F-48-S 	442.84	455.01	467.34	496.82	516.48	527.48
	64"(1626mm)	NS3P-64-S 	386.03	NS3F-64-S 	455.80	468.45	481.42	512.34	532.96	544.44
	80"(2032mm)	NS3P-80-S 	445.32	NS3F-80-S 	513.17	526.30	539.91	572.27	593.85	605.81
Grooved — Painted Top Cap										
3"(76mm)	42"(1067mm)	NS3P-42-G 	\$371.41	NS3F-42-G 	\$443.82	\$455.81	\$467.90	\$496.84	\$516.14	\$526.96
	48"(1219mm)	NS3P-48-G 	376.99	NS3F-48-G 	448.68	460.85	473.18	502.66	522.32	533.32
	64"(1626mm)	NS3P-64-G 	391.87	NS3F-64-G 	461.64	474.29	487.26	518.18	538.80	550.28
	80"(2032mm)	NS3P-80-G 	451.16	NS3F-80-G 	519.01	532.14	545.75	578.11	599.69	611.65
Wood Top Cap — Wood Group A										
3"(76mm)	42"(1067mm)	NS3P-42-W 	\$490.65	NS3F-42-W 	\$563.06	\$575.05	\$587.14	\$616.08	\$635.38	\$646.20
	48"(1219mm)	NS3P-48-W 	496.23	NS3F-48-W 	567.92	580.09	592.42	621.90	641.56	652.56
	64"(1626mm)	NS3P-64-W 	511.11	NS3F-64-W 	580.88	593.53	606.50	637.42	658.04	669.52
	80"(2032mm)	NS3P-80-W 	570.40	NS3F-80-W 	638.25	651.38	664.99	697.35	718.93	730.89
Wood Top Cap — Wood Group B										
3"(76mm)	42"(1067mm)	NS3P-42-W 	\$512.85	NS3F-42-W 	\$585.26	\$597.25	\$609.34	\$638.28	\$657.58	\$668.40
	48"(1219mm)	NS3P-48-W 	518.43	NS3F-48-W 	590.12	602.29	614.62	644.10	663.76	674.76
	64"(1626mm)	NS3P-64-W 	533.31	NS3F-64-W 	603.08	615.73	628.70	659.62	680.24	691.72
	80"(2032mm)	NS3P-80-W 	592.60	NS3F-80-W 	660.45	673.58	687.19	719.55	741.13	753.09

List price shown is with base raceway.

Panel Connectors and Trim Covers






3-Way 90°, Full-Height Connector with Pre-Configured (Sectional) Cover

		Wood Cover Number ①	Wood Group A Trim A	Trim B	Wood Group B Trim A	Trim B
Grooved — Painted Top Cap						
3"(76mm)	42"(1067mm)	NS3W-42-G	\$557.32	\$560.69	\$560.82	\$564.19
	48"(1219mm)	NS3W-48-G	562.18	565.55	565.68	569.05
	64"(1626mm)	NS3W-64-G	575.14	578.51	578.64	582.01
	80"(2032mm)	NS3W-80-G	632.51	635.88	636.01	639.38
Wood Top Cap						
3"(76mm)	42"(1067mm)	NS3W-42-W	\$677.68	\$679.93	\$703.38	\$705.63
	48"(1219mm)	NS3W-48-W	682.54	684.79	708.24	710.49
	64"(1626mm)	NS3W-64-W	695.50	697.75	721.20	723.45
	80"(2032mm)	NS3W-80-W	752.87	755.12	778.57	780.82

List price shown is with base raceway.

Panel Connectors and Trim Covers

3-Way 120°, Full-Height Connector

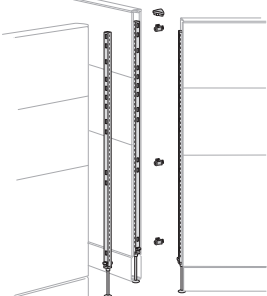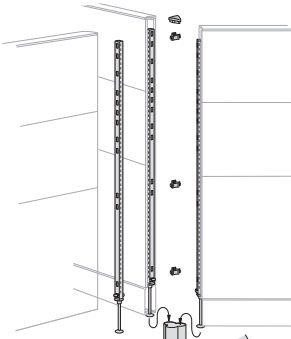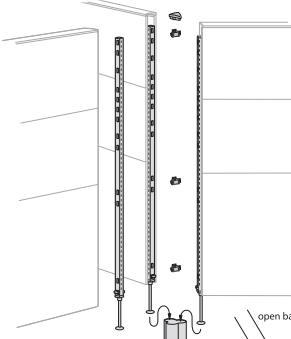	Width	Height	Number ①	Trim A	Trim B
3-Way 120°, Full-Height Connector     	Standard — Painted Top Cap				
	3"(76mm)	32"(813mm)	NLA-32-S	\$397.73	\$416.33
		42"(1067mm)	NLA-42-S	423.33	441.93
		48"(1219mm)	NLA-48-S	436.13	454.73
		53"(1346mm)	NLA-53-S	448.93	467.53
		64"(1626mm)	NLA-64-S	474.53	493.13
		80"(2032mm)	NLA-80-S	500.13	518.73
	Grooved — Painted Top Cap				
	3"(76mm)	32"(813mm)	NLA-32-G	\$407.04	\$425.64
		42"(1067mm)	NLA-42-G	432.64	451.24
		48"(1219mm)	NLA-48-G	445.44	464.04
		53"(1346mm)	NLA-53-G	458.24	476.84
		64"(1626mm)	NLA-64-G	483.84	502.44
		80"(2032mm)	NLA-80-G	509.44	528.04

List price shown is with base raceway.

Features

- **Base raceway panel connector** includes top cap, light blocks, base raceway cover, leveling glides, carpet grippers, slotted connectors and corner connectors, with appropriate number of top cap to corner aligners.
- **Open base panel connector** includes top cap, light blocks, vertical cover, leveling glides, carpet grippers, slotted connectors to corner aligners, and appropriate number of connector sleeves.
- Connects foundation elements, stack kits, or stack pads in a 3-way 120° intersection.
- Provides slots for mounting components.
- Connector reveal is standard in black finish color only.
- Connectors shipped assembled.
- Connector sleeves must be assembled onto the connector prior to panel installation.

Specification Tips

- **When used to connect monolithic panels of different heights in a 3-way 120° intersection, specify full-height connector to match the height of tallest panel.**
- **When used to connect a stackable panel configuration with stack kit(s) or stack pad(s) in a 3-way 120° intersection, specify full-height connector to match the height of tallest panel.**
- Specify variable-height cover for exposed portion of connector that extends above the shorter panel.
- **May not be used with extended connectors.**
- Connector assembly must be replaced to convert to an in-line, or 90° condition.
- Specify **-(G_)** for **grooved option** if any panel top cap within the intersection is grooved.
- Specify **-(S_)** for **standard option** if all panel top caps within the intersection are standard.
- Specify **-(1, 2 or 3)** for **open base option** to match the number of panels within the intersection which are open base.
- Specify **-(N)** for **base raceway option** if all panels within the intersection are standard base raceways.
- Standard connector top cap and the grooved connector top cap are aesthetically the same; smooth top cap surface without grooves.
- For open base application, specify trim color for upper connector sleeve. Lower sleeve is standard in black finish color only.
- For segmented trim applications, specify covers separately through eParts.

To Order, Specify:

- 1) Product number.
- 2) Trim color for upper connector sleeve(s).*
- 3) Trim color for top cap.*

① Base Raceway Specification

Base raceway option is available on 32"(813mm) – 80"(2032mm) high connectors. To specify a base raceway, place an **N** suffix as the **7th digit** in the product number.

Examples:

NLA-42-SN = Standard top cap; three base raceway panels

NLA-42-GN = Grooved top cap; three base raceway panels

Open Base Specification

Open base option is available on 32"(813mm) – 80"(2032mm) high connectors. To specify open base, place a **1** for one open base panel as the **7th digit** in the product number and add **\$64.27** list, or **2** for two open base panels as the **7th digit** in the product number and add **\$128.54** list, or **3** for three open base panels as the **7th digit** in the product number and add **\$192.81** list.

Examples:

NLA-42-S1 = Standard top cap; one open base panel

NLA-42-S2 = Standard top cap; two open base panels

NLA-42-S3 = Standard top cap; three open base panels

NLA-42-G1 = Grooved top cap; one open base panel

NLA-42-G2 = Grooved top cap; two open base panels

NLA-42-G3 = Grooved top cap; three open base panels


***Note:** Upcharge for mixed grade trim surfaces, refer to the electronic catalog for pricing.

Panel Connectors and Trim Covers


3-Way 90°, Extended Connector with Cover

Width	Height	Painted Cover Number	Trim A	Trim B	Fabric Cover Number	Fabric Grade		C	E	F	G
3"(76mm)	10"(254mm)	NX3P-10	\$276.92	\$295.62	NX3F-10	\$325.99	\$333.00	\$342.35	\$359.88	\$371.56	\$378.57
	16"(406mm)	NX3P-16	286.27	304.97	NX3F-16	368.05	375.06	384.41	401.94	413.62	420.63


Width	Height	Wood Cover Number	Wood Group A	Wood Group B
3"(76mm)	10"(254mm)	NX3W-10	\$411.28	\$435.82
	16"(406mm)	NX3W-16	495.40	519.94



Stack Kit Top View

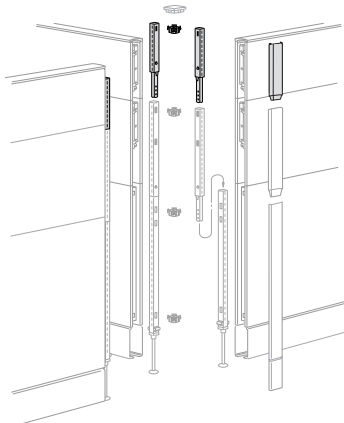

10" Connector

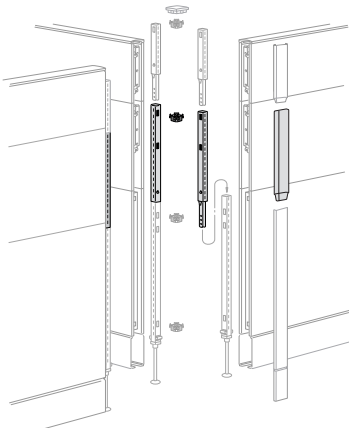

16" Connector

NX3P
NX3F
NX3W

Features

- Includes slotted connectors, light blocks, cover (no top cap), and corner connector.
- Connects stack kits in a 3-way condition.
- Provides slots for mounting components.
- Connector reveal is standard in black finish color only.
- Shipped unassembled.
- ◆ Available on RUSH.

Specification Tips

- Specify connector to match stack kit height.
- Must be used in conjunction with a 3-way 90° connector.
- Specify variable-height cover for exposed portion if connector extends above shorter panel.
- 10"(254mm) high connector can only be used at the top of a panel configuration. Will not accept additional connectors.
- **Cannot be used to attach foundation elements.**

To Order, Specify:

With Painted Cover

- 1) Product number.
- 2) Trim color for cover.

With Fabric Cover

- 1) Product number.
- 2) Fabric/colorway for cover.


With Wood Cover

- 1) Product number.
- 2) Wood finish for cover.


This page intentionally blank

Panel Connectors and Trim Covers



4-Way 90°, Full-Height Connector



Top View

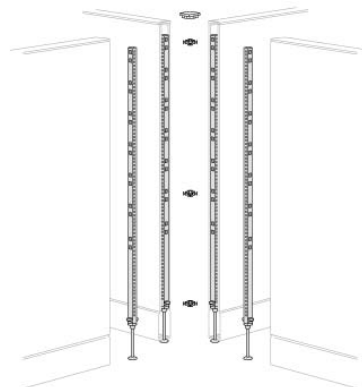

NL4-SN
NL4-GN
NL4-WN

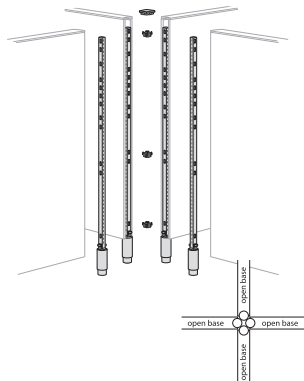

NL4-S1 NL4-G1 NL4-W1
NL4-S2 NL4-G2 NL4-W2
NL4-S3 NL4-G3 NL4-W3
NL4-S4 NL4-G4 NL4-W4

Features

- **Base raceway panel connector** includes top cap, light blocks, leveling glides, carpet grippers, slotted connectors and corner connectors, with appropriate number of top cap to corner aligners.
 - **Open base panel connector** includes top cap, light blocks, leveling glides, carpet grippers, slotted connectors and corner connectors with appropriate number of top cap to corner aligners, and appropriate number of connector sleeves.
 - Connects foundation elements, stack kits, or stack pads in a 4-way 90° intersection.
 - Provides slots for mounting components.
 - Connector reveal is standard in black finish color only.
 - Connectors shipped assembled.
 - Connector sleeves must be assembled onto the connector prior to panel installation.
- ◆ Available on RUSH.

Specification Tips

- When used to connect panel configurations of different heights in a 4-way 90° intersection, specify full-height connector to match the height of tallest panel configuration.
- When used to connect a stackable panel configuration with stack kit(s) or stack pad(s) in a 4-way 90° intersection, at a minimum specify full-height connector to match the height of tallest foundation element within the intersection. In addition, separately specify 4-way extended connectors for upper structure if applicable. Or specify full-height connector to match the height of the tallest panel configuration within the intersection. Refer to the specification guide for details.
- May be used in conjunction with 4-way extended connectors.
- Specify variable-height cover for each exposed side of the connector that extends above the lowest panel.
- Specify **-(G_)** for grooved option if any panel top cap within the intersection is grooved.
- Specify **-(S_)** for standard option if all panel top caps within the intersection are standard.
- Specify **-(1, 2, 3 or 4)** for open base option to match the number of panels within the intersection which are open base.
- Specify **-(N)** for base raceway option if all panels within the intersection are standard base raceways.
- Standard connector top cap and the grooved connector top cap are aesthetically the same; smooth top cap surface without grooves.
- For open base application, specify trim color for upper connector sleeve. Lower sleeve is standard in black finish color only.
- **58" panel connector allows for the following stack configurations:**
 - 32" foundation element with 10" and 16" stack kit. (NOTE: 10" stack kit can be above or below the 16" stack kit.)
 - 42" foundation element with 16" stack
 - 48" foundation element with 10" stack
- For segmented trim applications, specify covers separately through eParts.
- Heights will not line-up using 58" height configuration when a 32" foundation element is used.

To Order, Specify:

Standard or Grooved Top Cap

- 1) Product number.
- 2) Trim color for upper connector sleeve(s) (if applicable).*
- 3) Trim color for top cap.*

Wood Top Cap

- 1) Product number.
- 2) Trim color for upper sleeve(s) (if applicable).*
- 3) Wood finish for top cap.

1 Base Raceway Specification

Base raceway option is available on 32"(813mm) – 80"(2032mm) high connectors. To specify a base raceway, place an **N** suffix as the **7th digit** in the product number.

Examples:

NL4-42-SN = Standard top cap; four base raceway panels
NL4-42-GN = Grooved top cap; four base raceway panels

Open Base Specification

Open base option is available on 32"(813mm) – 80"(2032mm) high connectors. To specify open base, place a **1** for one open base panel as the **7th digit** in the product number and add **\$64.27** list, or **2** for two open base panels as the **7th digit** in the product number and add **\$128.54** list, or **3** for three open base panels as the **7th digit** in the product number and add **\$192.81** list, or **4** for four open base panels as the **7th digit** in the product number and add **\$260.05** list.















Examples:

NL4-42-S1 = Standard top cap; one open base panel
NL4-42-S2 = Standard top cap; two open base panels
NL4-42-S3 = Standard top cap; three open base panels
NL4-42-S4 = Standard top cap; four open base panels
NL4-42-G1 = Grooved top cap; one open base panel
NL4-42-G2 = Grooved top cap; two open base panels
NL4-42-G3 = Grooved top cap; three open base panels
NL4-42-G4 = Grooved top cap; four open base panels








*Note: Upcharge for mixed grade trim surfaces, refer to the electronic catalog for pricing.

Panel Connectors and Trim Covers

4-Way 90°, Full-Height Connector

Width	Height	Number ①	Trim A	B
Standard — Painted Top Cap				
3"(76mm)	32"(813mm)	NL4-32-S 	\$377.95	\$396.55
	42"(1067mm)	NL4-42-S 	401.21	419.81
	48"(1219mm)	NL4-48-S 	412.84	431.44
	53"(1346mm)	NL4-53-S 	424.47	443.07
	58"(1473mm)	NL4-58-S 	436.10	454.70
	64"(1626mm)	NL4-64-S 	447.73	466.33
	80"(2032mm)	NL4-80-S 	470.99	489.59
Grooved — Painted Top Cap				
3"(76mm)	32"(813mm)	NL4-32-G 	\$387.26	\$405.86
	42"(1067mm)	NL4-42-G 	410.52	429.12
	48"(1219mm)	NL4-48-G 	422.15	440.75
	53"(1346mm)	NL4-53-G 	433.78	452.38
	58"(1473mm)	NL4-58-G 	445.41	464.01
	64"(1626mm)	NL4-64-G 	457.04	475.64
	80"(2032mm)	NL4-80-G 	480.30	498.90



List price shown is with base raceway.


		Wood Cover Number ①	Wood Group A	Wood Group B
Wood Top Cap				
3"(76mm)	32"(813mm)	NL4-32-W 	\$507.04	\$529.25
	42"(1067mm)	NL4-42-W 	530.30	552.51
	48"(1219mm)	NL4-48-W 	541.93	564.14
	53"(1346mm)	NL4-53-W 	553.56	575.77
	58"(1473mm)	NL4-58-W 	565.19	587.40
	64"(1626mm)	NL4-64-W 	576.82	599.03
	80"(2032mm)	NL4-80-W 	600.08	622.29

List price shown is with base raceway.


Panel Connectors and Trim Covers

4-Way 90°, Extended Connector

Width	Height	Number	Price
3"(76mm)	10"(254mm)	NX4-10 	\$316.68
	16"(406mm)	NX4-16 	329.59




Stack Kit Top View

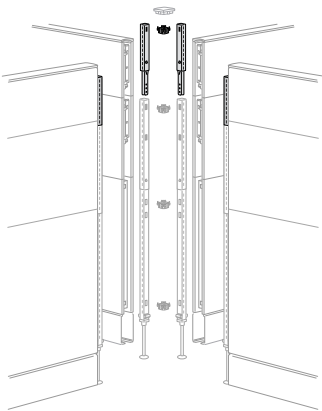

10" Connector

NX4-10

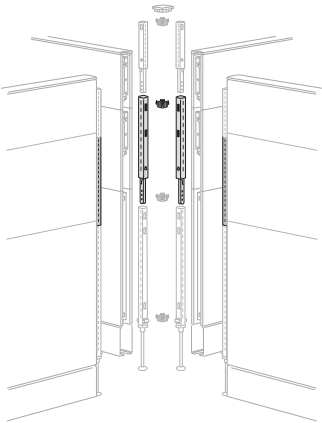

16" Connector

NX4-16

Features

- Includes slotted connectors (no top cap), light blocks, and corner connector.
- Connects stack kits in a 4-way condition.
- Provides slots for mounting components.
- Connector reveal is standard in black finish color only.
- Shipped unassembled.
- ◆ Available on RUSH.

To Order, Specify:

- 1) Product number.
(No finish specification required.)


Specification Tips

- Specify connector to match stack kit height.
- Must be used in conjunction with a 4-way 90° connector.
- Specify variable-height cover for exposed portion if connector extends above shorter panel.
- 10"(254mm) high connector can only be used at the top of a panel configuration. Will not accept additional connectors.
- **Cannot be used to attach foundation elements.**


This page intentionally blank

Panel Connectors and Trim Covers


End-of-Run, Full-Height Connector with Full-Height Cover



Top View



NLRP-SN
NLRP-SN
NLRP-SN
NLRP-SN
NLRP-SN
NLRP-SN
NLRP-SN
NLRP-SN
NLRP-SN
NLRP-SN

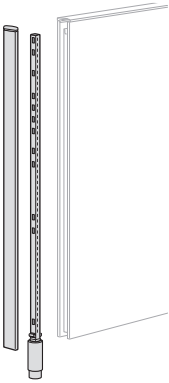

NLRP-S1
NLRP-S1
NLRP-S1
NLRP-S1
NLRP-S1
NLRP-S1
NLRP-S1
NLRP-S1
NLRP-S1
NLRP-S1

Features

- **Base raceway panel connector** includes top cap, vertical cover, base raceway cover, leveling glide, carpet gripper, and slotted connectors.
- **Open base panel connector** includes top cap, vertical cover, leveling glide, carpet gripper, slotted connector and connector sleeve.
- Supports the end of a panel configuration and provides a finished appearance.
- Provides slots for mounting components.
- Connector reveal is standard in black finish color only.
- Connectors shipped assembled.
- Connector sleeves must be assembled onto the connector prior to panel installation.

◆ Available on RUSH.

Specification Tips

- **When applied to panel configurations with or without stack kits or stack pads, at a minimum specify the full-height connector to match the foundation element. In addition separately specify extended End-of-Run Connectors for upper structure if applicable. Or specify the full-height connector to match the height of the panel configuration.**
- May be used in conjunction with end-of-run extended connectors.
- Specify **-(G_)** for **grooved option** if the adjacent panel top cap is grooved.
- Specify **-(S_)** for **standard option** if the adjacent panel top cap is standard.
- Specify **-(1)** for **open base option** if the adjacent panel is an open base.
- Specify **-(N)** for **base raceway option** if the adjacent panel is standard base raceway.
- Standard connector top cap and the grooved connector top cap are aesthetically the same; smooth top cap surface without grooves.
- For open base application, specify trim color for upper connector sleeve. Lower sleeve is standard in black finish color only.
- **58" panel connector allows for the following stack configurations:**
 - 32" foundation element with 10" and 16" stack kit. (NOTE: 10" stack kit can be above or below the 16" stack kit.)
 - 42" foundation element with 16" stack
 - 48" foundation element with 10" stack
- For segmented trim applications, specify covers separately through eParts.
- Heights will not line-up using 58" height configuration when a 32" foundation element is used.

To Order, Specify:

Standard or Grooved Top Cap w/Painted Cover

- 1) Product number.
- 2) Trim color for cover.*
- 3) Trim color for base raceway cover/upper connector sleeve(s).*
- 4) Trim color for top cap.*

Standard or Grooved Top Cap w/Fabric Cover

- 1) Product number.
- 2) Fabric/colorway for cover.
- 3) Trim color for base raceway cover/upper connector sleeve(s).*
- 4) Trim color for top cap.*

Grooved Top Cap w/Wood Cover

- 1) Product number.
- 2) Wood finish for cover.
- 3) Trim color for base raceway cover/upper connector sleeve(s).*
- 4) Trim color for top cap.*

Wood Top Cap w/Painted Cover

- 1) Product number.
- 2) Trim color for cover.*
- 3) Trim color for base raceway cover/upper connector sleeve(s).*
- 4) Wood finish for top cap.

Wood Top Cap w/Fabric Cover

- 1) Product number.
- 2) Fabric/colorway for cover.
- 3) Trim color for base raceway cover/upper connector sleeve(s).*
- 4) Wood finish for top cap.

Wood Top Cap w/Wood Cover

- 1) Product number.
- 2) Wood finish for cover.
- 3) Trim color for base raceway cover/upper connector sleeve(s).*
- 4) Wood finish for top cap.

① Base Raceway Specification

Base raceway option is available on 32"(813mm) – 80"(2032mm) high connectors. To specify a base raceway, place an **N** suffix as the **8th digit** in the product number.

Examples:

NLRP-42-SN = Standard top cap; base raceway panel
NLRP-42-GN = Grooved top cap; base raceway panel

Open Base Specification

Open base option is available on 32"(813mm) – 80"(2032mm) high connectors. To specify open base, place a **1** for one open base panel as the **8th digit** in the product number and add **\$64.27** list.

Examples:

NLRP-42-S1 = Standard top cap; one open base panel
NLRP-42-G1 = Grooved top cap; one open base panel

***Note:** Upcharge for mixed grade trim surfaces, refer to the electronic catalog for pricing.

Panel Connectors and Trim Covers

End-of-Run, Full-Height Connector with Full-Height Cover

Width	Height	Painted Cover Number ①	Trim A	Fabric Cover Number ①	Trim A		C	E	F	G		
					Fabric A	Grade B						
Standard — Painted Top Cap												
3"(76mm)	32"(813mm)	NLRP-32-S	■	\$ 89.97	NLRF-32-S	■	\$133.21	\$140.21	\$147.23	\$162.42	\$172.94	\$179.94
	42"(1067mm)	NLRP-42-S	■	92.27	NLRF-42-S	■	135.51	142.81	150.23	166.32	177.44	184.74
	48"(1219mm)	NLRP-48-S	■	93.65	NLRF-48-S	■	136.89	144.37	152.03	168.66	180.14	187.62
	53"(1346mm)	NLRP-53-S	■	94.80	NLRF-53-S	■	138.04	145.67	153.53	170.61	182.39	190.02
	58"(1473mm)	NLRP-58-S	■	95.95	NLRF-58-S	■	139.19	146.97	155.03	172.56	184.64	192.42
	64"(1626mm)	NLRP-64-S	■	97.33	NLRF-64-S	■	140.57	148.53	156.83	174.90	187.34	195.30
	80"(2032mm)	NLRP-80-S	■	113.87	NLRF-80-S	■	157.11	165.55	174.49	194.00	207.40	215.84
Grooved — Painted Top Cap												
3"(76mm)	32"(813mm)	NLRP-32-G	■	\$ 95.81	NLRF-32-G	■	\$139.05	\$146.05	\$153.07	\$168.26	\$178.78	\$185.78
	42"(1067mm)	NLRP-42-G	■	98.11	NLRF-42-G	■	141.35	148.65	156.07	172.16	183.28	190.58
	48"(1219mm)	NLRP-48-G	■	99.49	NLRF-48-G	■	142.73	150.21	157.87	174.50	185.98	193.46
	53"(1346mm)	NLRP-53-G	■	100.64	NLRF-53-G	■	143.88	151.51	159.37	176.45	188.23	195.86
	58"(1473mm)	NLRP-58-G	■	101.79	NLRF-58-G	■	145.03	152.81	160.87	178.40	190.48	198.26
	64"(1626mm)	NLRP-64-G	■	103.17	NLRF-64-G	■	146.41	154.37	162.67	180.74	193.18	201.14
	80"(2032mm)	NLRP-80-G	■	119.71	NLRF-80-G	■	162.95	171.39	180.33	199.84	213.24	221.68

List price shown is with base raceway.

Width	Height	Painted Cover Number ①	Trim B	Fabric Cover Number ①	Trim B		C	E	F	G		
					Fabric A	Grade B						
Standard — Painted Top Cap												
3"(76mm)	32"(813mm)	NLRP-32-S	■	\$ 94.51	NLRF-32-S	■	\$136.58	\$143.58	\$150.60	\$165.79	\$176.31	\$183.31
	42"(1067mm)	NLRP-42-S	■	98.01	NLRF-42-S	■	138.88	146.18	153.60	169.69	180.81	188.11
	48"(1219mm)	NLRP-48-S	■	100.11	NLRF-48-S	■	140.26	147.74	155.40	172.03	183.51	190.99
	53"(1346mm)	NLRP-53-S	■	101.86	NLRF-53-S	■	141.41	149.04	156.90	173.98	185.76	193.39
	58"(1473mm)	NLRP-58-S	■	103.61	NLRF-58-S	■	142.56	150.34	158.40	175.93	188.01	195.79
	64"(1626mm)	NLRP-64-S	■	105.71	NLRF-64-S	■	143.94	151.90	160.20	178.27	190.71	198.67
	80"(2032mm)	NLRP-80-S	■	124.17	NLRF-80-S	■	160.48	168.92	177.86	197.37	210.77	219.21
Grooved — Painted Top Cap												
3"(76mm)	32"(813mm)	NLRP-32-G	■	\$100.35	NLRF-32-G	■	\$142.42	\$149.42	\$156.44	\$171.63	\$182.15	\$189.15
	42"(1067mm)	NLRP-42-G	■	103.85	NLRF-42-G	■	144.72	152.02	159.44	175.53	186.65	193.95
	48"(1219mm)	NLRP-48-G	■	105.95	NLRF-48-G	■	146.10	153.58	161.24	177.87	189.35	196.83
	53"(1346mm)	NLRP-53-G	■	107.70	NLRF-53-G	■	147.25	154.88	162.74	179.82	191.60	199.23
	58"(1473mm)	NLRP-58-G	■	109.45	NLRF-58-G	■	148.40	156.18	164.24	181.77	193.85	201.63
	64"(1626mm)	NLRP-64-G	■	111.55	NLRF-64-G	■	149.78	157.74	166.04	184.11	196.55	204.51
	80"(2032mm)	NLRP-80-G	■	130.01	NLRF-80-G	■	166.32	174.76	183.70	203.21	216.61	225.05

List price shown is with base raceway.

Panel Connectors and Trim Covers

End-of-Run, Full-Height Connector with Full-Height Cover


		Wood Cover Number ❶	Wood Group A Trim A	Trim B	Wood Group B Trim A	Trim B
Grooved — Painted Top Cap						
3"(76mm)	32"(813mm)	NLRW-32-G	\$205.66	\$209.03	\$209.16	\$212.53
	42"(1067mm)	NLRW-42-G	207.96	211.33	211.46	214.83
	48"(1219mm)	NLRW-48-G	209.34	212.71	212.84	216.21
	53"(1346mm)	NLRW-53-G	210.49	213.86	213.99	217.36
	58"(1473mm)	NLRW-58-G	211.64	215.01	215.14	218.51
	64"(1626mm)	NLRW-64-G	213.02	216.39	216.52	219.89
	80"(2032mm)	NLRW-80-G	229.56	232.93	233.06	236.43
Wood Top Cap						
3"(76mm)	32"(813mm)	NLRW-32-W	\$326.02	\$328.27	\$351.72	\$353.97
	42"(1067mm)	NLRW-42-W	328.32	330.57	354.02	356.27
	48"(1219mm)	NLRW-48-W	329.70	331.95	355.40	357.65
	53"(1346mm)	NLRW-53-W	330.85	333.10	356.55	358.80
	58"(1473mm)	NLRW-58-W	332.00	334.25	357.70	359.95
	64"(1626mm)	NLRW-64-W	333.38	335.63	359.08	361.33
	80"(2032mm)	NLRW-80-W	349.92	352.17	375.62	377.87

List price shown is with base raceway.


This page intentionally blank

Panel Connectors and Trim Covers


End-of-Run, Full-Height Connector with Pre-Configured (Sectional) Cover



Top View



NSRP-SN
NSRF-SN
NSRP-GN
NSRF-GN
NSRW-GN
NSRP-WN
NSRF-WN
NSRW-WN

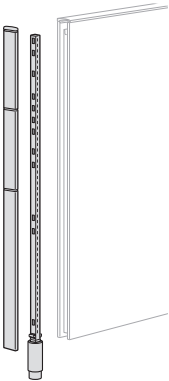

NSRP-S1
NSRF-S1
NSRP-G1
NSRF-G1
NSRW-G1
NSRP-W1
NSRF-W1
NSRW-W1

Features

- **Base raceway panel connector** includes top cap, vertical covers, base raceway cover, leveling glide, carpet gripper, and slotted connectors.
- **Open base panel connector** includes top cap, vertical covers, leveling glide, carpet gripper, slotted connector and connector sleeve.
- Supports the end of a panel configuration and provides a finished appearance.
- Provides slots for mounting components.
- Connector reveal is standard in black finish color only.
- Connectors shipped assembled.
- Connector sleeves must be assembled onto the connector prior to panel installation.

Specification Tips

- **When applied to panel configurations with or without stack kits or stack pads, at a minimum specify the full-height connector to match the foundation element. In addition separately specify extended End-of-Run Connectors for upper structure if applicable. Or specify the full-height connector to match the height of the panel configuration.**
- May be used in conjunction with end-of-run extended connectors.
- Specify **-(G_)** for **grooved option** if the adjacent panel top cap is grooved.
- Specify **-(S_)** for **standard option** if the adjacent panel top cap is standard.
- Specify **-(1)** for **open base option** if the adjacent panel is an open base.
- Specify **-(N)** for **base raceway option** if the adjacent panel is standard base raceway.
- Standard connector top cap and the grooved connector top cap are aesthetically the same; smooth top cap surface without grooves.
- For open base application, specify trim color for upper connector sleeve. Lower sleeve is standard in black finish color only.

To Order, Specify:

Standard or Grooved Top Cap w/Painted Cover

- 1) Product number.
- 2) Trim color for cover.*
- 3) Trim color for base raceway cover/upper connector sleeve(s).*
- 4) Trim color for top cap.*

Standard or Grooved Top Cap w/Fabric Cover

- 1) Product number.
- 2) Fabric/colorway for cover.
- 3) Trim color for base raceway cover/upper connector sleeve(s).*
- 4) Trim color for top cap.*

Grooved Top Cap w/Wood Cover

- 1) Product number.
- 2) Wood finish for cover.
- 3) Trim color for base raceway cover/upper connector sleeve(s).*
- 4) Trim color for top cap.*

Wood Top Cap w/Painted Cover

- 1) Product number.
- 2) Trim color for cover.*
- 3) Trim color for base raceway cover/upper connector sleeve(s).*
- 4) Wood finish for top cap.

Wood Top Cap w/Fabric Cover

- 1) Product number.
- 2) Fabric/colorway for cover.
- 3) Trim color for base raceway cover/upper connector sleeve(s).*
- 4) Wood finish for top cap.

Wood Top Cap w/Wood Cover

- 1) Product number.
- 2) Wood finish for cover.
- 3) Trim color for base raceway cover/upper connector sleeve(s).*
- 4) Wood finish for top cap.

① Base Raceway Specification

Base raceway option is available on 32"(813mm) – 80"(2032mm) high connectors. To specify a base raceway, place an **N** suffix as the **8th digit** in the product number.

Examples:

NSRP-42-SN = Standard top cap; base raceway panel
NSRP-42-GN = Grooved top cap; base raceway panel

Open Base Specification

Open base option is available on 32"(813mm) – 80"(2032mm) high connectors. To specify open base, place a **1** for one open base panel as the **8th digit** in the product number and add **\$64.27** list.

































Examples:

NSRP-42-S1 = Standard top cap; one open base panel
NSRP-42-G1 = Grooved top cap; one open base panel

































***Note:** Upcharge for mixed grade trim surfaces, refer to the electronic catalog for pricing.

Panel Connectors and Trim Covers

End-of-Run, Full-Height Connector with Pre-Configured (Sectional) Cover

Width	Height	Painted Cover Number ①	Trim A	Fabric Cover Number ①	Trim A		C	E	F	G
					Fabric Grade A	B				
Standard — Painted Top Cap										
3"(76mm)	42"(1067mm)	NSRP-42-S 	\$114.48	NSRF-42-S 	\$157.72	\$165.02	\$172.44	\$188.53	\$199.65	\$206.95
	48"(1219mm)	NSRP-48-S 	115.86	NSRF-48-S 	159.10	166.58	174.24	190.87	202.35	209.83
	64"(1626mm)	NSRP-64-S 	119.54	NSRF-64-S 	162.78	170.74	179.04	197.11	209.55	217.51
	80"(2032mm)	NSRP-80-S 	136.08	NSRF-80-S 	179.32	187.76	196.70	216.21	229.61	238.05
Grooved — Painted Top Cap										
3"(76mm)	42"(1067mm)	NSRP-42-G 	\$120.32	NSRF-42-G 	\$163.56	\$170.86	\$178.28	\$194.37	\$205.49	\$212.79
	48"(1219mm)	NSRP-48-G 	121.70	NSRF-48-G 	164.94	172.42	180.08	196.71	208.19	215.67
	64"(1626mm)	NSRP-64-G 	125.38	NSRF-64-G 	168.62	176.58	184.88	202.95	215.39	223.35
	80"(2032mm)	NSRP-80-G 	141.92	NSRF-80-G 	185.16	193.60	202.54	222.05	235.45	243.89
Wood Top Cap — Wood Group A										
3"(76mm)	42"(1067mm)	NSRP-42-W 	\$172.91	NSRF-42-W 	\$216.15	\$223.45	\$230.87	\$246.96	\$258.08	\$265.38
	48"(1219mm)	NSRP-48-W 	174.29	NSRF-48-W 	217.53	225.01	232.67	249.30	260.78	268.26
	64"(1626mm)	NSRP-64-W 	177.97	NSRF-64-W 	221.21	229.17	237.47	255.54	267.98	275.94
	80"(2032mm)	NSRP-80-W 	194.51	NSRF-80-W 	237.75	246.19	255.13	274.64	288.04	296.48
Wood Top Cap — Wood Group B										
3"(76mm)	42"(1067mm)	NSRP-42-W 	\$183.42	NSRF-42-W 	\$226.66	\$233.96	\$241.38	\$257.47	\$268.59	\$275.89
	48"(1219mm)	NSRP-48-W 	184.80	NSRF-48-W 	228.04	235.52	243.18	259.81	271.29	278.77
	64"(1626mm)	NSRP-64-W 	188.48	NSRF-64-W 	231.72	239.68	247.98	266.05	278.49	286.45
	80"(2032mm)	NSRP-80-W 	205.02	NSRF-80-W 	248.26	256.70	265.64	285.15	298.55	306.99

List price shown is with base raceway.

Width	Height	Painted Cover Number ①	Trim B	Fabric Cover Number ①	Trim B		C	E	F	G
					Fabric Grade A	B				
Standard — Painted Top Cap										
3"(76mm)	42"(1067mm)	NSRP-42-S 	\$120.22	NSRF-42-S 	\$161.09	\$168.39	\$175.81	\$191.90	\$203.02	\$210.32
	48"(1219mm)	NSRP-48-S 	122.32	NSRF-48-S 	162.47	169.95	177.61	194.24	205.72	213.20
	64"(1626mm)	NSRP-64-S 	127.92	NSRF-64-S 	166.15	174.11	182.41	200.48	212.92	220.88
	80"(2032mm)	NSRP-80-S 	146.38	NSRF-80-S 	182.69	191.13	200.07	219.58	232.98	241.42
Grooved — Painted Top Cap										
3"(76mm)	42"(1067mm)	NSRP-42-G 	\$126.06	NSRF-42-G 	\$166.93	\$174.23	\$181.65	\$197.74	\$208.86	\$216.16
	48"(1219mm)	NSRP-48-G 	128.16	NSRF-48-G 	168.31	175.79	183.45	200.08	211.56	219.04
	64"(1626mm)	NSRP-64-G 	133.76	NSRF-64-G 	171.99	179.95	188.25	206.32	218.76	226.72
	80"(2032mm)	NSRP-80-G 	152.22	NSRF-80-G 	188.53	196.97	205.91	225.42	238.82	247.26
Wood Top Cap — Wood Group A										
3"(76mm)	42"(1067mm)	NSRP-42-W 	\$177.53	NSRF-42-W 	\$218.40	\$225.70	\$233.12	\$249.21	\$260.33	\$267.63
	48"(1219mm)	NSRP-48-W 	179.63	NSRF-48-W 	219.78	227.26	234.92	251.55	263.03	270.51
	64"(1626mm)	NSRP-64-W 	185.23	NSRF-64-W 	223.46	231.42	239.72	257.79	270.23	278.19
	80"(2032mm)	NSRP-80-W 	203.69	NSRF-80-W 	240.00	248.44	257.38	276.89	290.29	298.73
Wood Top Cap — Wood Group B										
3"(76mm)	42"(1067mm)	NSRP-42-W 	\$188.04	NSRF-42-W 	\$228.91	\$236.21	\$243.63	\$259.72	\$270.84	\$278.14
	48"(1219mm)	NSRP-48-W 	190.14	NSRF-48-W 	230.29	237.77	245.43	262.06	273.54	281.02
	64"(1626mm)	NSRP-64-W 	195.74	NSRF-64-W 	233.97	241.93	250.23	268.30	280.74	288.70
	80"(2032mm)	NSRP-80-W 	214.20	NSRF-80-W 	250.51	258.95	267.89	287.40	300.80	309.24

List price shown is with base raceway.

Panel Connectors and Trim Covers

End-of-Run, Full-Height Connector with Pre-Configured (Sectional) Cover

		Wood Cover Number ❶	Wood Group A Trim A	Trim B	Wood Group B Trim A	Trim B
Grooved — Painted Top Cap						
3"(76mm)	42"(1067mm)	NSRW-42-G	\$245.36	\$248.73	\$248.86	\$252.23
	48"(1219mm)	NSRW-48-G	246.74	250.11	250.24	253.61
	64"(1626mm)	NSRW-64-G	250.42	253.79	253.92	257.29
	80"(2032mm)	NSRW-80-G	266.96	270.33	270.46	273.83
Wood Top Cap						
3"(76mm)	42"(1067mm)	NSRW-42-W	\$297.95	\$300.20	\$311.96	\$314.21
	48"(1219mm)	NSRW-48-W	299.33	301.58	313.34	315.59
	64"(1626mm)	NSRW-64-W	303.01	305.26	317.02	319.27
	80"(2032mm)	NSRW-80-W	319.55	321.80	333.56	335.81


List price shown is with base raceway.

Panel Connectors and Trim Covers

Extended Connector with Cover

Width	Height	Painted Cover Number	Trim A	Trim B	Fabric Cover Number	Fabric Grade A	Fabric Grade B	C	E	F	G		
No Top Cap													
3"(76mm)	10"(254mm)	NXRP-10	◆	\$143.74	\$162.44	NXRF-10	◆	\$192.81	\$199.82	\$209.17	\$226.70	\$238.38	\$245.39
	16"(406mm)	NXRP-16	◆	153.09	171.79	NXRF-16	◆	202.16	209.17	218.52	236.05	247.73	254.74

			Wood Cover Number	Wood Group A	Wood Group B
No Top Cap					
3"(76mm)	10"(254mm)		NXRW-10	\$278.10	\$302.64
	16"(406mm)		NXRW-16	287.45	311.99

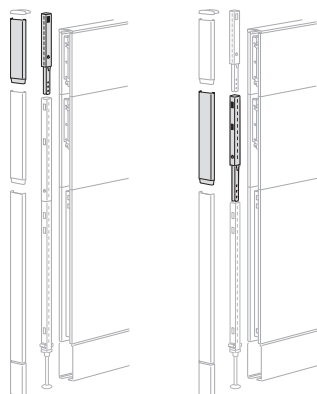

10" Connector **16" Connector**

NXRP
NXRF
NXRW

Features

- Includes slotted connector and cover, and light block.
- Supports the end of a stack kit and provides a finished appearance.
- Provides slots for mounting components.
- ◆ Available on RUSH.

Specification Tips

- Specify connector to match stack kit height.
- Must be used in conjunction with an end-of-run full-height or end-of-run pre-configured standard or grooved connector. (Exception: Extended connector cannot be added to a 42"(1067mm) high end-of-run pre-configured connector.)
- 10"(254mm) high connector can only be used at the top of a panel configuration. Will not accept additional connectors.

To Order, Specify:

With Painted Cover

- 1) Product number.
- 2) Trim color for cover.

With Fabric Cover


- 1) Product number.
- 2) Fabric/colorway for cover.

With Wood Cover


- 1) Product number.
- 2) Wood finish for cover.

Panel Connectors and Trim Covers


T-Mount Kit

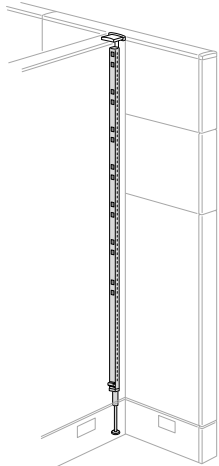

NVST-SN
NVST-GN

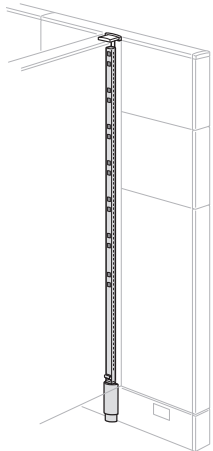

NVST-S1
NVST-G1

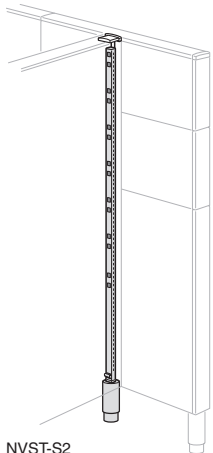

NVST-S2
NVST-G2

Features

- **Base raceway with T-mount kit** includes top cap filler, light block, leveling glide, slotted connectors and attachment hardware.
- **Open base with T-mount kit** includes top cap filler, light block, leveling glide, slotted connectors and attachment hardware, and connector sleeve.
- Connects two foundation elements, with or without stack kits, in a T-condition.
- Provides slots for mounting components.
- Adds 5/16" (8mm) to the panel width.
- Connector reveal is standard in black finish color only.
- T-mount and connector sleeve are field assembled.

■ Available on RUSH.

Specification Tips

- Attach T-mount assembly any place on the fabric monolithic panel except .8" (20mm) minimum from each end.
- When attached to a monolithic panel without stack kits, the height of the T-mount must equal the height of the monolithic panel.
- When attached to a panel with 10" (254mm) and 16" (406mm) high stack kits, the height of the T-mount connector must equal the height of the panel or the panel at any stack kit level.
- **Variable height conditions requiring trim covers are not recommended.**
- When super base panels with or without stack kits are used, attach T-mount assembly anywhere on panel configuration except 5" (127mm) minimum from each end.
- Center mounting on 36" (914mm) – 60" (1524mm) wide stack kits requires the specification of a center mount bracket (NVST-1), standard in black finish only.
- Cannot mount on glazed panels or doors.
- Specify **-(G_) for grooved T-mount option** if either panel top cap within the intersection is grooved.
- Specify **-(S_) for standard or wood T-mount option** if both panel top caps within the intersection are standard or wood.
- Specify **-(1 or 2) for open base option** to match the number of panels within the intersection which are open base.
- Specify **-(N) for base raceway option** if both panels within the intersection are standard base raceways.
- **T-mounting directly to a panel with a grooved top cap requires specification of the Grooved T-mount Kit Adaptor.**
- For open base application, specify trim color for upper connector sleeve. Lower sleeve is standard in black finish color only.

To Order, Specify:

- 1) Product number.
- 2) Trim color for upper connector sleeve(s) (if applicable).*
- 3) Trim color for top filler.*

① Base Raceway Specification

Base raceway option is available on 32" (813mm) – 80" (2032mm) high connectors. To specify a base raceway, place an **N** suffix as the **8th digit** in the product number.

Examples:

NVST-42-SN = Standard top cap; base raceway panel
NVST-42-GN = Grooved top cap; base raceway panel

Open Base Specification

Open base option is available on 32" (813mm) – 80" (2032mm) high connectors. To specify open base, place a **1** for one open base panel, or **2** for two open base panels as the **8th digit** in the product number and add **\$94.90** list.

Examples:

NVST-42-S1 = Standard top cap; one open base panel
NVST-42-S2 = Standard top cap; two open base panels
NVST-42-G1 = Grooved top cap; one open base panel
NVST-42-G2 = Grooved top cap; two open base panels

***Note:** Upcharge for mixed grade trim surfaces, refer to the electronic catalog for pricing.


Panel Connectors and Trim Covers

T-Mount Kit

	Panel Height	Number ①	Trim A	B
T-Mount Kit	Standard/Wood			
	32"(813mm)	NVST-32-S	\$184.02	\$202.54
	42"(1067mm)	NVST-42-S	211.80	230.32
	48"(1219mm)	NVST-48-S	225.69	244.21
	53"(1346mm)	NVST-53-S	239.58	258.10
	58"(1473mm)	NVST-58-S	253.47	271.99
	64"(1626mm)	NVST-64-S	267.36	285.88
	74"(1880mm)	NVST-74-S	281.25	299.77
	80"(2032mm)	NVST-80-S	295.14	313.66
	Grooved			
	32"(813mm)	NVST-32-G	\$184.02	\$202.54
	42"(1067mm)	NVST-42-G	211.80	230.32
	48"(1219mm)	NVST-48-G	225.69	244.21
	53"(1346mm)	NVST-53-G	239.58	258.10
	58"(1473mm)	NVST-58-G	253.47	271.99
	64"(1626mm)	NVST-64-G	267.36	285.88
	74"(1880mm)	NVST-74-G	281.25	299.77
	80"(2032mm)	NVST-80-G	295.14	313.66

List price shown is with base raceway.

Center Mount Bracket



NVST-1

	Price
NVST-1	\$37.40

Feature

- Includes bracket and hardware.
- Available on RUSH.


To Order, Specify:

- Product number.
(No finish specification required.)

Specification Tips

- Must be specified when using 36"(914mm) – 60"(1524mm) wide stack kits on spine.
- Used in conjunction with T-mount kit.

Grooved T-Mount Bracket



NVST-G

	Price
NVST-G	\$72.45

Feature

- Includes bracket and hardware.

To Order, Specify:



- Product number.
- Trim color.

Specification Tips

- Used in conjunction with T-mount kit; refer to specification tips for T-mount.
- For use when T-mounting directly to a panel with grooved top cap.
- Perpendicular panel(s) may have any top cap option.
- Not for use with off-modular T-mount kit.

Panel Connectors and Trim Covers

Off-Modular T-Mount Kit

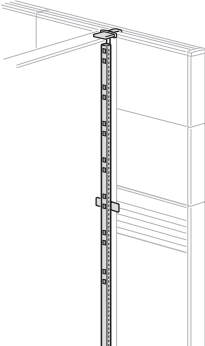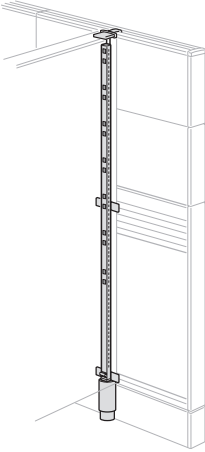	Panel Height	Number ①	Trim A	B
	Standard/Wood			
	32"(813mm)	NVSZ-32-S	\$275.45	\$293.97
	42"(1067mm)	NVSZ-42-S	312.49	331.01
	48"(1219mm)	NVSZ-48-S	331.01	349.53
	58"(1473mm)	NVSZ-58-S	368.05	386.57
	64"(1626mm)	NVSZ-64-S	386.57	405.09
	Grooved			
	32"(813mm)	NVSZ-32-G	\$275.45	\$293.97
	42"(1067mm)	NVSZ-42-G	312.49	331.01
	48"(1219mm)	NVSZ-48-G	331.01	349.53
	58"(1473mm)	NVSZ-58-G	368.05	386.57
	64"(1626mm)	NVSZ-64-G	386.57	405.09

List price shown is with base raceway.

Features

- **Base raceway with off-modular T-mount kit** includes top attachment bracket, light block, leveling glide, slotted connectors and attachment hardware.
- **Open base with T-mount kit** includes top attachment bracket, light block, leveling glide, slotted connectors and attachment hardware, and appropriate number of connector sleeves.
- Provides slots for mounting components.
- Adds 5/16"(8mm) to the panel width.
- Connector reveal is standard in black finish color only.
- Connector sleeve must be assembled onto the connector prior to panel installation.

Specification Tips

- **Panel configuration of off-modular panel spine must consist of off-modular super base pads with grooved top cap.**
- Off-modular T-mount kit must match the height of panel spine.
- **Return panels cannot be greater than 16"(406mm) below height of panel spine.**
- Specify variable height cover for exposed portion of connector that extends above the shorter panel.
- If return panel top cap is grooved specify -(G_).
- If return panel top cap is standard or wood specify -(S_).
- If all panels within the condition have a base raceway specify -(_N).
- Specify -(_1 or 2) for open base option to match the number of panels within the intersection which are open base.
- Use of the Off-Modular T-mount Kit(s) and 2-way, 3-way, or 4-way connectors within panel spine may result in worksurface misalignment. This condition is dependent upon the worksurface configuration within the workstation.
- When used at the outer most end of a panel spine the End-of-Run connector will extend beyond the Off-Modular T-Mount Kit.

To Order, Specify:

- 1) Product number.
- 2) Trim color for upper connector sleeve(s) (if applicable).*
- 3) Trim color for top attachment bracket.*

① Base Raceway Specification

Base raceway option is available on 32"(813mm) – 64"(1626mm) high connectors. To specify a base raceway, place an **N** suffix as the **8th digit** in the product number.

Examples:

NVSZ-42-SN = Standard top cap; base raceway panel
NVSZ-42-GN = Grooved top cap; base raceway panel

Open Base Specification

Open base option is available on 32"(813mm) – 64"(1626mm) high connectors. To specify open base, place a **1** for one open base panel, or **2** for two open base panels as the **8th digit** in the product number and add **\$94.90** list.

Examples:

NVSZ-42-S1 = Standard top cap; one open base panel
NVSZ-42-S2 = Standard top cap; two open base panels
NVSZ-42-G1 = Grooved top cap; one open base panel
NVSZ-42-G2 = Grooved top cap; two open base panels

***Note:** Upcharge for mixed grade trim surfaces, refer to the electronic catalog for pricing.

Panel Connectors and Trim Covers

Wall Mount Kit

	Panel Height	Number ①	Trim A	B
	Standard/Wood			
	32"(813mm)	NVSW-32-S	\$152.77	\$171.29
	42"(1067mm)	NVSW-42-S	194.43	212.95
	48"(1219mm)	NVSW-48-S	215.26	233.78
	53"(1346mm)	NVSW-53-S	236.09	254.61
	58"(1473mm)	NVSW-58-S	256.92	275.44
	64"(1626mm)	NVSW-64-S	277.75	296.27
	74"(1880mm)	NVSW-74-S	298.58	317.10
	80"(2032mm)	NVSW-80-S	319.41	337.93
	Grooved			
	32"(813mm)	NVSW-32-G	\$152.77	\$171.29
	42"(1067mm)	NVSW-42-G	194.43	212.95
	48"(1219mm)	NVSW-48-G	215.26	233.78
	53"(1346mm)	NVSW-53-G	236.09	254.61
	58"(1473mm)	NVSW-58-G	256.92	275.44
	64"(1626mm)	NVSW-64-G	277.75	296.27
	74"(1880mm)	NVSW-74-G	298.58	317.10
	80"(2032mm)	NVSW-80-G	319.41	337.93

List price shown is with base raceway.

Features

- **Base raceway with wall mount kit** includes top filler, light block, leveling glide, and slotted channel.
- **Open base with wall mount kit** includes top filler, light block, leveling glide, slotted channel, and connector sleeve.
- For mounting foundation elements, stack kits, or stack pads to a structural wall.
- Provides slots for mounting components.
- Adds 1/4"(6mm) to the panel width.
- Connector reveal is standard in black finish color only.
- Connector sleeve must be assembled onto the connector prior to panel installation.
- ◆ Available on RUSH.

Specification Tips

- Must be properly anchored to a structural wall.
- For applications above 80"(2032mm) height used in conjunction with floor-to-ceiling wall mount kit. Field cut as needed.
- If attached panel top cap is grooved specify -(G_).
- If attached panel top cap is standard or wood specify -(S_).
- If attached panel has a base raceway specify -(N).
- If attached panel has an open base raceway specify -(1).
- For an open base application, specify trim color for upper connector sleeve. Lower sleeve is standard in black finish color only.

To Order, Specify:

- 1) Product number.
- 2) Trim color for upper connector sleeve(s) (if applicable).*
- 3) Trim color for top attachment bracket.*

① Base Raceway Specification

Base raceway option is available on 32"(813mm) – 80"(2032mm) high wall mounts. To specify a base raceway, place an **N** suffix as the **8th digit** in the product number.

Examples:

NVSW-42-SN = Standard top cap; base raceway panel

NVSW-42-GN = Grooved top cap; base raceway panel

Open Base Specification

Open base option is available on 32"(813mm) – 80"(2032mm) high wall mounts. To specify open base, place a **1** for one open base panel as the **8th digit** in the product number and add **\$94.90** list.

Examples:



NVSW-42-S1 = Standard top cap; one open base panel

NVSW-42-G1 = Grooved top cap; one open base panel

*Note: Upcharge for mixed grade trim surfaces, refer to the electronic catalog for pricing.


Panel Connectors and Trim Covers

Heavy Load Stabilizer

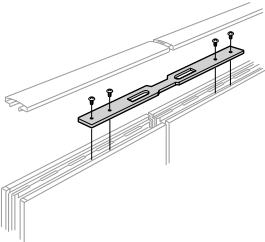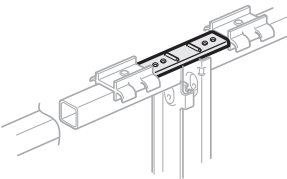	Number	Price
<div><div><div>Heavy Load Stabilizer Bar for Monolithic Panels</div><div></div><div>NSB-1</div></div></div> <div><div><div>Features</div><div><ul style="list-style-type: none">• Includes one bar and mounting screws.• Provides additional stability between two monolithic fabric panels at the same height in an in-line condition.• Recommended for 42"(1067mm), 48"(1219mm), 60"(1524mm), and 80"(2032mm) high monolithic fabric panel.• Order for use with other fabric monolithic panel heights and widths as required.• Must be removed to attach stack kits or stack pads.• Recommended for unbalanced configuration with overheads and panels adjacent to single doors.</div></div><div><div>To Order, Specify:</div><div><div>1) Product number. (No finish specification required.)</div></div></div></div>	NSB-1	\$32.72
<div><div><div>Heavy Load Stabilizer Bar for Stack Kits</div><div></div><div>NSB-2</div></div></div> <div><div><div>Features</div><div><ul style="list-style-type: none">• Includes one bar and mounting screws.• Provides additional stability between two stack kits or stack pads at the same height in an in-line condition.• Recommended for additional stability in off-modular applications.• Recommended for unbalanced configuration with overheads and panels adjacent to single doors.</div></div><div><div>To Order, Specify:</div><div><div>1) Product number. (No finish specification required.)</div></div></div></div>	NSB-2	\$44.40

Panel Connectors and Trim Covers

	Number	Price
Corner Connector Bracket	NCMB-12	\$165.93

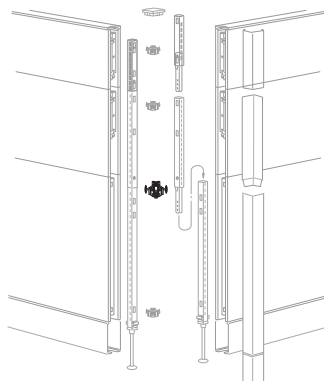

NCMB-12

Features

- Includes twelve connector brackets, and four 80"(2032mm) corner light blocks.
- Use in conjunction with straight connectors to create two-way, three-way or four-way connections.
- Standard in black finish color only.


To Order, Specify:

- 1) Product number.
(No finish specification required.)

Specification Tip

- Light blocks may be field cut to appropriate size.

Grooved Top Cap

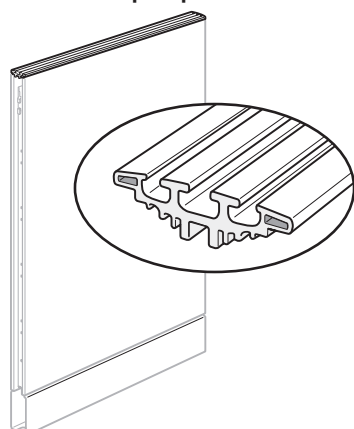

NTGL

Depth	Length	Panel Width Combinations	Number	Trim A	B
3"(76mm)	18"(457mm)		NTGL-18	\$158.55	\$160.84
	24"(610mm)		NTGL-24	167.80	170.67
	30"(762mm)		NTGL-30	182.84	186.29
	36"(914mm)		NTGL-36	186.30	190.33
	42"(1067mm)		NTGL-42	195.55	200.16
	48"(1219mm)		NTGL-48	204.80	209.99
	60"(1524mm)		NTGL-60	233.72	240.07
	72"(1829mm)	36"(914mm)/36"(914mm)	NTGL-72	376.10	380.13
	84"(2134mm)	36"(914mm)/48"(1219mm)	NTGL-84	393.46	397.49
	96"(2438mm)	48"(1219mm)/48"(1219mm)	NTGL-96	481.40	486.59
	108"(2734mm)	36"(914mm)/36"(914mm)/36"(914mm)	NTGL-108	557.79	561.82
	120"(3048mm)	36"(914mm)/48"(1219mm)/36"(914mm)**	NTGL-120	575.15	579.18

Features

- Includes one grooved top cap with attachment hardware for monolithic or stackable panel configuration.
- Enhanced PREMISE standard top cap and the grooved top cap have the same profile and are compatible with each other.
- Three grooves provide off-modular applications:
 - outer channels support off-modular return panels and off-modular overhead storage units.
 - center channel supports toppers, canopies, and Jump Stuff ambient lights.

To Order, Specify:

- 1) Product number.
- 2) Trim color.

Specification Tips


- 72"(1829mm) – 120"(3048mm) lengths minimize panel run reveals by spanning multiple panel widths.
- 72"(1829mm) – 120"(3048mm) lengths cannot be mounted on 32"(813mm) high super base panels.
- Grooved top on monolithic panels eliminates routing of cable in top trough.
- Additional stability is provided when grooved top caps are used to span multiple panels.
- Can be used to retrofit existing standard top caps.
- Can be used on glazed panels or doors with field supplied screws.

Panel Connectors and Trim Covers

Variable-Height Covers — Full-Height Cover


Variable-Height Covers — Full-Height Cover

NOTE:
Illustrations shown on this page should not be used to determine support and load guidelines, see Specification Guide.

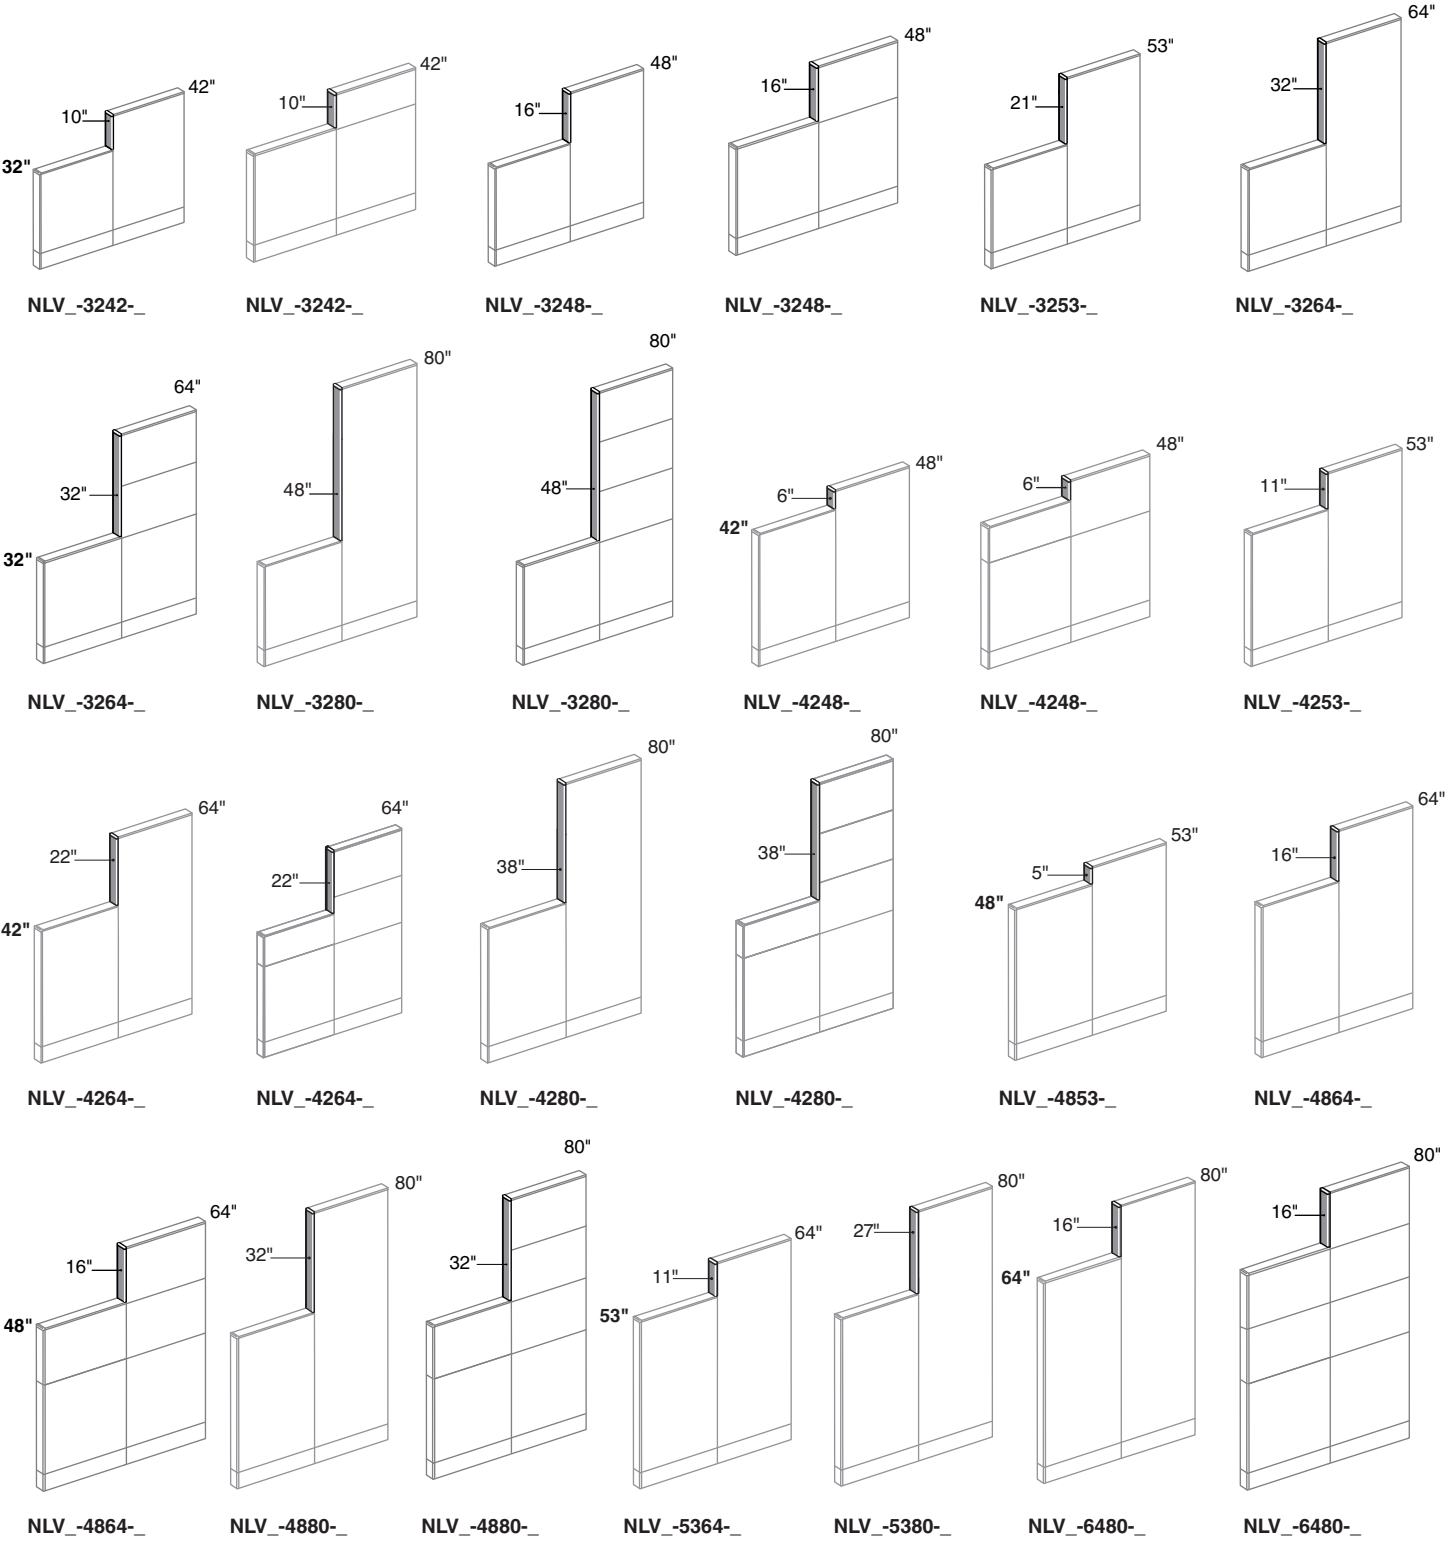

Panel Connectors and Trim Covers

Variable-Height Covers — Full-Height Cover



NLVP-S
NLVF-S
NLVP-G
NLVF-G
NLVW-G
NLVP-W
NLVF-W
NLVW-W

Features

- Includes cover, top cap, and top cap adaptor.
- Provides finished appearance in variable-height conditions on exposed connector in straight, 2-way, 3-way or 4-way conditions.
- Install on exposed portion(s) of tallest panel connector.

◆ Available on RUSH.

Specification Tips

- Cover is specified from the lowest to highest panel.
- Top cap of the lower panel requires field cutting of the top cap to accommodate the top cap adaptor provided with the cover.
- The bottom of the cover is coped to fit over the top cap on the lower panel.
- Cover is to be used with separately specified panel connector.
- May be used with extended variable-height cover.
- If the tallest panel in the **in-line intersection** has a grooved top cap, a variable height cover with a grooved top cap is required.
- All 2-way, 3-way, or 4-way intersections with different height panels require standard variable height covers, regardless of the panel top cap type; standard or grooved.

To Order, Specify:

Standard or Grooved Top Cap w/Painted Cover

- 1) Product number.
- 2) Trim color for cover.*
- 3) Trim color for top cap.*

Standard or Grooved Top Cap w/Fabric Cover

- 1) Product number.
- 2) Fabric/colorway for cover.
- 3) Trim color for top cap.*

Grooved Top Cap w/Wood Cover

- 1) Product number.
- 2) Wood finish for cover.
- 3) Trim color for top cap.*

Wood Top Cap w/Painted Cover

- 1) Product number.
- 2) Trim color for cover.*
- 3) Wood finish for top cap.

Wood Top Cap w/Fabric Cover

- 1) Product number.
- 2) Fabric/colorway for cover.
- 3) Wood finish for top cap.

Wood Top Cap w/Wood Cover

- 1) Product number.
- 2) Wood finish for cover.
- 3) Wood finish for top cap.

***Note:** Upcharge for mixed grade trim surfaces, refer to the electronic catalog for pricing.

Panel Connectors and Trim Covers

Variable-Height Covers — Full-Height Cover

Panel Heights		Description	Painted Cover Number	Trim A	Fabric Cover Number	Trim A		Fabric Grade B	C	E	F	G
Lowest	Highest											
Standard Top Cap												
32"(813mm)	42"(1067mm)	10" cover	NLVP-3242-S	\$ 34.27	NLVP-3242-S	\$ 74.45	\$ 80.86	\$ 88.51	\$105.01	\$116.47	\$122.94	
	48"(1219mm)	16" cover	NLVP-3248-S	39.67	NLVP-3248-S	80.87	88.24	96.97	115.75	128.83	136.32	
	53"(1346mm)	21" cover	NLVP-3253-S	44.17	NLVP-3253-S	86.22	94.39	104.02	124.70	139.13	147.47	
	64"(1626mm)	32" cover	NLVP-3264-S	54.07	NLVP-3264-S	97.99	107.92	119.53	144.39	161.79	172.00	
	80"(2032mm)	48" cover	NLVP-3280-S	68.47	NLVP-3280-S	115.11	127.60	142.09	173.03	194.75	207.68	
42"(1067mm)	48"(1219mm)	6" cover	NLVP-4248-S	\$ 30.67	NLVP-4248-S	\$ 70.17	\$ 75.94	\$ 82.87	\$ 97.85	\$108.23	\$114.02	
	53"(1346mm)	11" cover	NLVP-4253-S	35.17	NLVP-4253-S	75.52	82.09	89.92	106.80	118.53	125.17	
	64"(1626mm)	22" cover	NLVP-4264-S	45.07	NLVP-4264-S	87.29	95.62	105.43	126.49	141.19	149.70	
	80"(2032mm)	38" cover	NLVP-4280-S	59.47	NLVP-4280-S	104.41	115.30	127.99	155.13	174.15	185.38	
48"(1219mm)	53"(1346mm)	5" cover	NLVP-4853-S	\$ 29.77	NLVP-4853-S	\$ 69.10	\$ 74.71	\$ 81.46	\$ 96.06	\$106.17	\$111.79	
	64"(1626mm)	16" cover	NLVP-4864-S	39.67	NLVP-4864-S	80.87	88.24	96.97	115.75	128.83	136.32	
	80"(2032mm)	32" cover	NLVP-4880-S	54.07	NLVP-4880-S	97.99	107.92	119.53	144.39	161.79	172.00	
53"(1346mm)	64"(1626mm)	11" cover	NLVP-5364-S	\$ 35.17	NLVP-5364-S	\$ 75.52	\$ 82.09	\$ 89.92	\$106.80	\$118.53	\$125.17	
	80"(2032mm)	27" cover	NLVP-5380-S	49.57	NLVP-5380-S	92.64	101.77	112.48	135.44	151.49	160.85	
64"(1626mm)	80"(2032mm)	16" cover	NLVP-6480-S	\$ 39.67	NLVP-6480-S	\$ 80.87	\$ 88.24	\$ 96.97	\$115.75	\$128.83	\$136.32	
Grooved Top Cap												
32"(813mm)	42"(1067mm)	10" cover	NLVP-3242-G	\$ 42.70	NLVP-3242-G	\$ 82.88	\$ 89.29	\$ 96.94	\$113.44	\$124.90	\$131.37	
	48"(1219mm)	16" cover	NLVP-3248-G	48.10	NLVP-3248-G	89.30	96.67	105.40	124.18	137.26	144.75	
	53"(1346mm)	21" cover	NLVP-3253-G	52.60	NLVP-3253-G	94.65	102.82	112.45	133.13	147.56	155.90	
	64"(1626mm)	32" cover	NLVP-3264-G	62.50	NLVP-3264-G	106.42	116.35	127.96	152.82	170.22	180.43	
	80"(2032mm)	48" cover	NLVP-3280-G	76.90	NLVP-3280-G	123.54	136.03	150.52	181.46	203.18	216.11	
42"(1067mm)	48"(1219mm)	6" cover	NLVP-4248-G	\$ 39.10	NLVP-4248-G	\$ 78.60	\$ 84.37	\$ 91.30	\$106.28	\$116.66	\$122.45	
	53"(1346mm)	11" cover	NLVP-4253-G	43.60	NLVP-4253-G	83.95	90.52	98.35	115.23	126.96	133.60	
	64"(1626mm)	22" cover	NLVP-4264-G	53.50	NLVP-4264-G	95.72	104.05	113.86	134.92	149.62	158.13	
	80"(2032mm)	38" cover	NLVP-4280-G	67.90	NLVP-4280-G	112.84	123.73	136.42	163.56	182.58	193.81	
48"(1219mm)	53"(1346mm)	5" cover	NLVP-4853-G	\$ 38.20	NLVP-4853-G	\$ 77.53	\$ 83.14	\$ 89.89	\$104.49	\$114.60	\$120.22	
	64"(1626mm)	16" cover	NLVP-4864-G	48.10	NLVP-4864-G	89.30	96.67	105.40	124.18	137.26	144.75	
	80"(2032mm)	32" cover	NLVP-4880-G	62.50	NLVP-4880-G	106.42	116.35	127.96	152.82	170.22	180.43	
53"(1346mm)	64"(1626mm)	11" cover	NLVP-5364-G	\$ 43.60	NLVP-5364-G	\$ 83.95	\$ 90.52	\$ 98.35	\$115.23	\$126.96	\$133.60	
	80"(2032mm)	27" cover	NLVP-5380-G	58.00	NLVP-5380-G	101.07	110.20	120.91	143.87	159.92	169.28	
64"(1626mm)	80"(2032mm)	16" cover	NLVP-6480-G	\$ 48.10	NLVP-6480-G	\$ 89.30	\$ 96.67	\$105.40	\$124.18	\$137.26	\$144.75	
Wood Top Cap — Wood Group A												
32"(813mm)	42"(1067mm)	10" cover	NLVP-3242-W	\$ 84.27	NLVP-3242-W	\$124.45	\$130.86	\$138.51	\$155.01	\$166.47	\$172.94	
	48"(1219mm)	16" cover	NLVP-3248-W	89.67	NLVP-3248-W	130.87	138.24	146.97	165.75	178.83	186.32	
	53"(1346mm)	21" cover	NLVP-3253-W	94.17	NLVP-3253-W	136.22	144.39	154.02	174.70	189.13	197.47	
	64"(1626mm)	32" cover	NLVP-3264-W	104.07	NLVP-3264-W	147.99	157.92	169.53	194.39	211.79	222.00	
	80"(2032mm)	48" cover	NLVP-3280-W	118.47	NLVP-3280-W	165.11	177.60	192.09	223.03	244.75	257.68	
42"(1067mm)	48"(1219mm)	6" cover	NLVP-4248-W	\$ 80.67	NLVP-4248-W	\$120.17	\$125.94	\$132.87	\$147.85	\$158.23	\$164.02	
	53"(1346mm)	11" cover	NLVP-4253-W	85.17	NLVP-4253-W	125.52	132.09	139.92	156.80	168.53	175.17	
	64"(1626mm)	22" cover	NLVP-4264-W	95.07	NLVP-4264-W	137.29	145.62	155.43	176.49	191.19	199.70	
	80"(2032mm)	38" cover	NLVP-4280-W	109.47	NLVP-4280-W	154.41	165.30	177.99	205.13	224.15	235.38	
48"(1219mm)	53"(1346mm)	5" cover	NLVP-4853-W	\$ 79.77	NLVP-4853-W	\$119.10	\$124.71	\$131.46	\$146.06	\$156.17	\$161.79	
	64"(1626mm)	16" cover	NLVP-4864-W	89.67	NLVP-4864-W	130.87	138.24	146.97	165.75	178.83	186.32	
	80"(2032mm)	32" cover	NLVP-4880-W	104.07	NLVP-4880-W	147.99	157.92	169.53	194.39	211.79	222.00	
53"(1346mm)	64"(1626mm)	11" cover	NLVP-5364-W	\$ 85.17	NLVP-5364-W	\$125.52	\$132.09	\$139.92	\$156.80	\$168.53	\$175.17	
	80"(2032mm)	27" cover	NLVP-5380-W	99.57	NLVP-5380-W	142.64	151.77	162.48	185.44	201.49	210.85	
64"(1626mm)	80"(2032mm)	16" cover	NLVP-6480-W	\$ 89.67	NLVP-6480-W	\$130.87	\$138.24	\$146.97	\$165.75	\$178.83	\$186.32	
Wood Top Cap — Wood Group B												
32"(813mm)	42"(1067mm)	10" cover	NLVP-3242-W	\$ 93.26	NLVP-3242-W	\$133.44	\$139.85	\$147.50	\$164.00	\$175.46	\$181.93	
	48"(1219mm)	16" cover	NLVP-3248-W	98.66	NLVP-3248-W	139.86	147.23	155.96	174.74	187.82	195.31	
	53"(1346mm)	21" cover	NLVP-3253-W	103.16	NLVP-3253-W	145.21	153.38	163.01	183.69	198.12	206.46	
	64"(1626mm)	32" cover	NLVP-3264-W	113.06	NLVP-3264-W	156.98	166.91	178.52	203.38	220.78	230.99	
	80"(2032mm)	48" cover	NLVP-3280-W	127.46	NLVP-3280-W	174.10	186.59	201.08	232.02	253.74	266.67	
42"(1067mm)	48"(1219mm)	6" cover	NLVP-4248-W	\$ 89.66	NLVP-4248-W	\$129.16	\$134.93	\$141.86	\$156.84	\$167.22	\$173.01	
	53"(1346mm)	11" cover	NLVP-4253-W	94.16	NLVP-4253-W	134.51	141.08	148.91	165.79	177.52	184.16	
	64"(1626mm)	22" cover	NLVP-4264-W	104.06	NLVP-4264-W	146.28	154.61	164.42	185.48	200.18	208.69	
	80"(2032mm)	38" cover	NLVP-4280-W	118.46	NLVP-4280-W	163.40	174.29	186.98	214.12	233.14	244.37	
48"(1219mm)	53"(1346mm)	5" cover	NLVP-4853-W	\$ 88.76	NLVP-4853-W	\$128.09	\$133.70	\$140.45	\$155.05	\$165.16	\$170.78	
	64"(1626mm)	16" cover	NLVP-4864-W	98.66	NLVP-4864-W	139.86	147.23	155.96	174.74	187.82	195.31	
	80"(2032mm)	32" cover	NLVP-4880-W	113.06	NLVP-4880-W	156.98	166.91	178.52	203.38	220.78	230.99	
53"(1346mm)	64"(1626mm)	11" cover	NLVP-5364-W	\$ 94.16	NLVP-5364-W	\$134.51	\$141.08	\$148.91	\$165.79	\$177.52	\$184.16	
	80"(2032mm)	27" cover	NLVP-5380-W	108.56	NLVP-5380-W	151.63	160.76	171.47	194.43	210.48	219.84	
64"(1626mm)	80"(2032mm)	16" cover	NLVP-6480-W	\$ 98.66	NLVP-6480-W	\$139.86	\$147.23	\$155.96	\$174.74	\$187.82	\$195.31	

Panel Connectors and Trim Covers

Variable-Height Covers — Full-Height Cover

Panel Heights			Painted Cover Number	Trim B	Fabric Cover Number	Trim B		C	E	F	G
Lowest	Highest	Description				Fabric Grade A	B				
Standard Top Cap											
32"(813mm)	42"(1067mm)	10" cover	NLVP-3242-S	\$ 37.63	NLVF-3242-S	\$ 75.01	\$ 81.42	\$ 89.07	\$105.57	\$117.03	\$123.50
	48"(1219mm)	16" cover	NLVP-3248-S	43.69	NLVF-3248-S	81.43	88.80	97.53	116.31	129.39	136.88
	53"(1346mm)	21" cover	NLVP-3253-S	48.74	NLVF-3253-S	86.78	94.95	104.58	125.26	139.69	148.03
	64"(1626mm)	32" cover	NLVP-3264-S	59.85	NLVF-3264-S	98.55	108.48	120.09	144.95	162.35	172.56
42"(1067mm)	80"(2032mm)	48" cover	NLVP-3280-S	76.01	NLVF-3280-S	115.67	128.16	142.65	173.59	195.31	208.24
	48"(1219mm)	6" cover	NLVP-4248-S	\$ 33.59	NLVF-4248-S	\$ 70.73	\$ 76.50	\$ 83.43	\$ 98.41	\$108.79	\$114.58
	53"(1346mm)	11" cover	NLVP-4253-S	38.64	NLVF-4253-S	76.08	82.65	90.48	107.36	119.09	125.73
	64"(1626mm)	22" cover	NLVP-4264-S	49.75	NLVF-4264-S	87.85	96.18	105.99	127.05	141.75	150.26
48"(1219mm)	80"(2032mm)	38" cover	NLVP-4280-S	65.91	NLVF-4280-S	104.97	115.86	128.55	155.69	174.71	185.94
	53"(1346mm)	5" cover	NLVP-4853-S	\$ 32.58	NLVF-4853-S	\$ 69.66	\$ 75.27	\$ 82.02	\$ 96.62	\$106.73	\$112.35
	64"(1626mm)	16" cover	NLVP-4864-S	43.69	NLVF-4864-S	81.43	88.80	97.53	116.31	129.39	136.88
	80"(2032mm)	32" cover	NLVP-4880-S	59.85	NLVF-4880-S	98.55	108.48	120.09	144.95	162.35	172.56
53"(1346mm)	64"(1626mm)	11" cover	NLVP-5364-S	\$ 38.64	NLVF-5364-S	\$ 76.08	\$ 82.65	\$ 90.48	\$107.36	\$119.09	\$125.73
	80"(2032mm)	27" cover	NLVP-5380-S	54.80	NLVF-5380-S	93.20	102.33	113.04	136.00	152.05	161.41
64"(1626mm)	80"(2032mm)	16" cover	NLVP-6480-S	\$ 43.69	NLVF-6480-S	\$ 81.43	\$ 88.80	\$ 97.53	\$116.31	\$129.39	\$136.88
Grooved Top Cap											
32"(813mm)	42"(1067mm)	10" cover	NLVP-3242-G	\$ 46.62	NLVF-3242-G	\$ 84.00	\$ 90.41	\$ 98.06	\$114.56	\$126.02	\$132.49
	48"(1219mm)	16" cover	NLVP-3248-G	52.68	NLVF-3248-G	90.42	97.79	106.52	125.30	138.38	145.87
	53"(1346mm)	21" cover	NLVP-3253-G	57.73	NLVF-3253-G	95.77	103.94	113.57	134.25	148.68	157.02
	64"(1626mm)	32" cover	NLVP-3264-G	68.84	NLVF-3264-G	107.54	117.47	129.08	153.94	171.34	181.55
	80"(2032mm)	48" cover	NLVP-3280-G	85.00	NLVF-3280-G	124.66	137.15	151.64	182.58	204.30	217.23
42"(1067mm)	48"(1219mm)	6" cover	NLVP-4248-G	\$ 42.58	NLVF-4248-G	\$ 79.72	\$ 85.49	\$ 92.42	\$107.40	\$117.78	\$123.57
	53"(1346mm)	11" cover	NLVP-4253-G	47.63	NLVF-4253-G	85.07	91.64	99.47	116.35	128.08	134.72
	64"(1626mm)	22" cover	NLVP-4264-G	58.74	NLVF-4264-G	96.84	105.17	114.98	136.04	150.74	159.25
	80"(2032mm)	38" cover	NLVP-4280-G	74.90	NLVF-4280-G	113.96	124.85	137.54	164.68	183.70	194.93
48"(1219mm)	53"(1346mm)	5" cover	NLVP-4853-G	\$ 41.57	NLVF-4853-G	\$ 78.65	\$ 84.26	\$ 91.01	\$105.61	\$115.72	\$121.34
	64"(1626mm)	16" cover	NLVP-4864-G	52.68	NLVF-4864-G	90.42	97.79	106.52	125.30	138.38	145.87
	80"(2032mm)	32" cover	NLVP-4880-G	68.84	NLVF-4880-G	107.54	117.47	129.08	153.94	171.34	181.55
	53"(1346mm)	64"(1626mm)	11" cover	NLVP-5364-G	\$ 47.63	NLVF-5364-G	\$ 85.07	\$ 91.64	\$ 99.47	\$116.35	\$128.08
64"(1626mm)	80"(2032mm)	27" cover	NLVP-5380-G	63.79	NLVF-5380-G	102.19	111.32	122.03	144.99	161.04	170.40
	80"(2032mm)	16" cover	NLVP-6480-G	\$ 52.68	NLVF-6480-G	\$ 90.42	\$ 97.79	\$106.52	\$125.30	\$138.38	\$145.87
	Wood Top Cap — Wood Group A										
32"(813mm)	42"(1067mm)	10" cover	NLVP-3242-W	\$ 87.07	NLVF-3242-W	\$124.45	\$130.86	\$138.51	\$155.01	\$166.47	\$172.94
	48"(1219mm)	16" cover	NLVP-3248-W	93.13	NLVF-3248-W	130.87	138.24	146.97	165.75	178.83	186.32
	53"(1346mm)	21" cover	NLVP-3253-W	98.18	NLVF-3253-W	136.22	144.39	154.02	174.70	189.13	197.47
	64"(1626mm)	32" cover	NLVP-3264-W	109.29	NLVF-3264-W	147.99	157.92	169.53	194.39	211.79	222.00
	80"(2032mm)	48" cover	NLVP-3280-W	125.45	NLVF-3280-W	165.11	177.60	192.09	223.03	244.75	257.68
42"(1067mm)	48"(1219mm)	6" cover	NLVP-4248-W	\$ 83.03	NLVF-4248-W	\$120.17	\$125.94	\$132.87	\$147.85	\$158.23	\$164.02
	53"(1346mm)	11" cover	NLVP-4253-W	88.08	NLVF-4253-W	125.52	132.09	139.92	156.80	168.53	175.17
	64"(1626mm)	22" cover	NLVP-4264-W	99.19	NLVF-4264-W	137.29	145.62	155.43	176.49	191.19	199.70
	80"(2032mm)	38" cover	NLVP-4280-W	115.35	NLVF-4280-W	154.41	165.30	177.99	205.13	224.15	235.38
48"(1219mm)	53"(1346mm)	5" cover	NLVP-4853-W	\$ 82.02	NLVF-4853-W	\$119.10	\$124.71	\$131.46	\$146.06	\$156.17	\$161.79
	64"(1626mm)	16" cover	NLVP-4864-W	93.13	NLVF-4864-W	130.87	138.24	146.97	165.75	178.83	186.32
	80"(2032mm)	32" cover	NLVP-4880-W	109.29	NLVF-4880-W	147.99	157.92	169.53	194.39	211.79	222.00
53"(1346mm)	64"(1626mm)	11" cover	NLVP-5364-W	\$ 88.08	NLVF-5364-W	\$125.52	\$132.09	\$139.92	\$156.80	\$168.53	\$175.17
	80"(2032mm)	27" cover	NLVP-5380-W	104.24	NLVF-5380-W	142.64	151.77	162.48	185.44	201.49	210.85
64"(1626mm)	80"(2032mm)	16" cover	NLVP-6480-W	\$ 93.13	NLVF-6480-W	\$130.87	\$138.24	\$146.97	\$165.75	\$178.83	\$186.32
Wood Top Cap — Wood Group B											
32"(813mm)	42"(1067mm)	10" cover	NLVP-3242-W	\$ 96.06	NLVF-3242-W	\$133.44	\$139.85	\$147.50	\$164.00	\$175.46	\$181.93
	48"(1219mm)	16" cover	NLVP-3248-W	102.12	NLVF-3248-W	139.86	147.23	155.96	174.74	187.82	195.31
	53"(1346mm)	21" cover	NLVP-3253-W	107.17	NLVF-3253-W	145.21	153.38	163.01	183.69	198.12	206.46
	64"(1626mm)	32" cover	NLVP-3264-W	118.28	NLVF-3264-W	156.98	166.91	178.52	203.38	220.78	230.99
	80"(2032mm)	48" cover	NLVP-3280-W	134.44	NLVF-3280-W	174.10	186.59	201.08	232.02	253.74	266.67
42"(1067mm)	48"(1219mm)	6" cover	NLVP-4248-W	\$ 92.02	NLVF-4248-W	\$129.16	\$134.93	\$141.86	\$156.84	\$167.22	\$173.01
	53"(1346mm)	11" cover	NLVP-4253-W	97.07	NLVF-4253-W	134.51	141.08	148.91	165.79	177.52	184.16
	64"(1626mm)	22" cover	NLVP-4264-W	108.18	NLVF-4264-W	146.28	154.61	164.42	185.48	200.18	208.69
	80"(2032mm)	38" cover	NLVP-4280-W	124.34	NLVF-4280-W	163.40	174.29	186.98	214.12	233.14	244.37
48"(1219mm)	53"(1346mm)	5" cover	NLVP-4853-W	\$ 91.01	NLVF-4853-W	\$128.09	\$133.70	\$140.45	\$155.05	\$165.16	\$170.78
	64"(1626mm)	16" cover	NLVP-4864-W	102.12	NLVF-4864-W	139.86	147.23	155.96	174.74	187.82	195.31
	80"(2032mm)	32" cover	NLVP-4880-W	118.28	NLVF-4880-W	156.98	166.91	178.52	203.38	220.78	230.99
53"(1346mm)	64"(1626mm)	11" cover	NLVP-5364-W	\$ 97.07	NLVF-5364-W	\$134.51	\$141.08	\$148.91	\$165.79	\$177.52	\$184.16
	80"(2032mm)	27" cover	NLVP-5380-W	113.23	NLVF-5380-W	151.63	160.76	171.47	194.43	210.48	219.84
64"(1626mm)	80"(2032mm)	16" cover	NLVP-6480-W	\$102.12	NLVF-6480-W	\$139.86	\$147.23	\$155.96	\$174.74	\$187.82	\$195.31

Panel Connectors and Trim Covers

Variable-Height Covers — Full-Height Cover

Panel Heights		Description	Wood Cover Number	Wood Group A	Trim B	Wood Group B	Trim B
Lowest	Highest			Trim A		Trim A	
Grooved Top Cap							
32"(813mm)	42"(1067mm)	10" cover	NLVW-3242-G	\$133.57	\$134.69	\$150.54	\$151.66
	48"(1219mm)	16" cover	NLVW-3248-G	139.27	140.39	157.26	158.38
	53"(1346mm)	21" cover	NLVW-3253-G	144.02	145.14	162.86	163.98
	64"(1626mm)	32" cover	NLVW-3264-G	154.47	155.59	175.18	176.30
	80"(2032mm)	48" cover	NLVW-3280-G	169.67	170.79	193.10	194.22
42"(1067mm)	48"(1219mm)	6" cover	NLVW-4248-G	\$129.77	\$130.89	\$146.06	\$147.18
	53"(1346mm)	11" cover	NLVW-4253-G	134.52	135.64	151.66	152.78
	64"(1626mm)	22" cover	NLVW-4264-G	144.97	146.09	163.98	165.10
	80"(2032mm)	38" cover	NLVW-4280-G	160.17	161.29	181.90	183.02
48"(1219mm)	53"(1346mm)	5" cover	NLVW-4853-G	\$128.82	\$129.94	\$144.94	\$146.06
	64"(1626mm)	16" cover	NLVW-4864-G	139.27	140.39	157.26	158.38
	80"(2032mm)	32" cover	NLVW-4880-G	154.47	155.59	175.18	176.30
53"(1346mm)	64"(1626mm)	11" cover	NLVW-5364-G	\$134.52	\$135.64	\$151.66	\$152.78
	80"(2032mm)	27" cover	NLVW-5380-G	149.72	150.84	169.58	170.70
64"(1626mm)	80"(2032mm)	16" cover	NLVW-6480-G	\$139.27	\$140.39	\$157.26	\$158.38


			Wood Cover Number	Wood Group A	Wood Group B	
Wood Top Cap						
32"(813mm)	42"(1067mm)	10" cover	NLVW-3242-W	\$175.14	\$201.10	
	48"(1219mm)	16" cover	NLVW-3248-W	180.84	207.82	
	53"(1346mm)	21" cover	NLVW-3253-W	185.59	213.42	
	64"(1626mm)	32" cover	NLVW-3264-W	196.04	225.74	
	80"(2032mm)	48" cover	NLVW-3280-W	211.24	243.66	
42"(1067mm)	48"(1219mm)	6" cover	NLVW-4248-W	\$171.34	\$196.62	
	53"(1346mm)	11" cover	NLVW-4253-W	176.09	202.22	
	64"(1626mm)	22" cover	NLVW-4264-W	186.54	214.54	
	80"(2032mm)	38" cover	NLVW-4280-W	201.74	232.46	
48"(1219mm)	53"(1346mm)	5" cover	NLVW-4853-W	\$170.39	\$195.50	
	64"(1626mm)	16" cover	NLVW-4864-W	180.84	207.82	
	80"(2032mm)	32" cover	NLVW-4880-W	196.04	225.74	
53"(1346mm)	64"(1626mm)	11" cover	NLVW-5364-W	\$176.09	\$202.22	
	80"(2032mm)	27" cover	NLVW-5380-W	191.29	220.14	
64"(1626mm)	80"(2032mm)	16" cover	NLVW-6480-W	\$180.84	\$207.82	

This page intentionally blank


Panel Connectors and Trim Covers

Variable-Height Covers — Sectional Cover


Variable-Height Covers — Sectional Cover




NSV_-3242-__




NSV_-3248-__

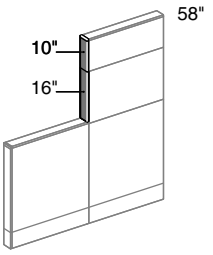


NSV_-3258-__

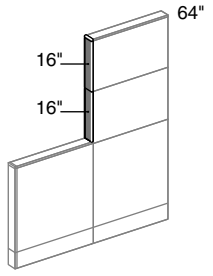


NSV_-3264-__

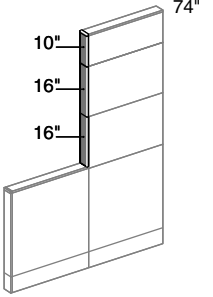


NSV_-3274-__

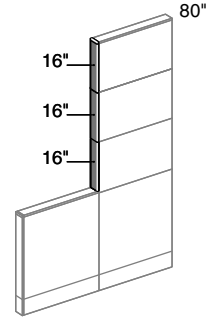


NSV_-3280-__

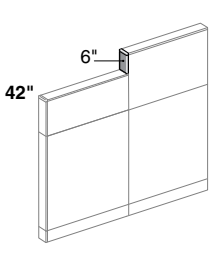


NSV_-4248-__

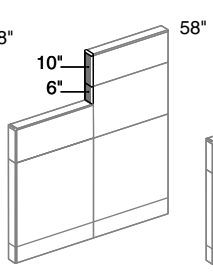


NSV_-4258-__

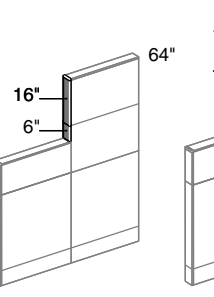


NSV_-4264-__

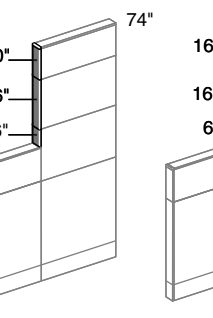


NSV_-4274-__

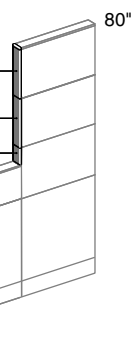


NSV_-4280-__

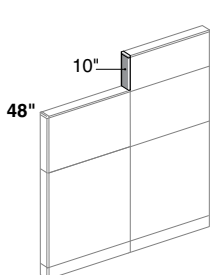


NSV_-4858-__

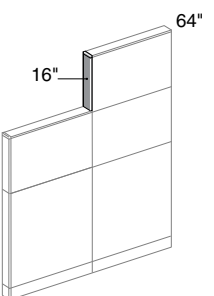


NSV_-4864-__

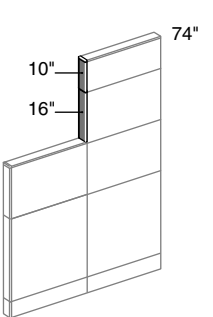


NSV_-4874-__

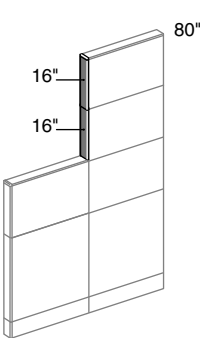


NSV_-4880-__

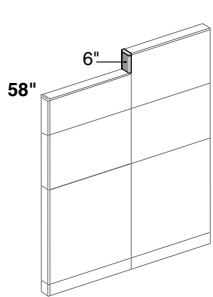


NSV_-5864-__

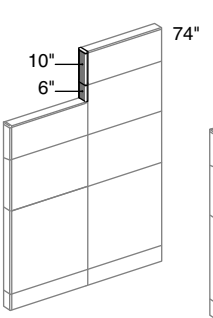


NSV_-5874-__

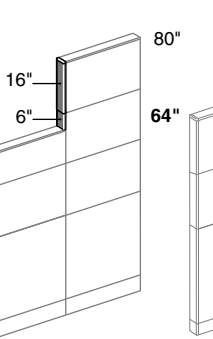


NSV_-5880-__

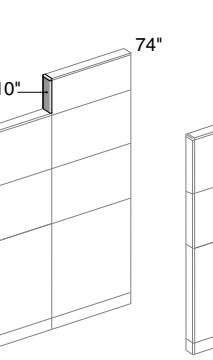

NSV_-6474-__

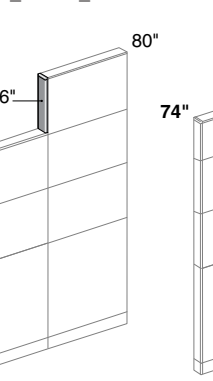

NSV_-6480-__




NSV_-7480-__

NOTE:
Illustrations shown on this page should not be used to determine support and load guidelines, see Specification Guide.

Panel Connectors and Trim Covers

Variable-Height Covers — Sectional Cover



NSVP-S
NSVF-S
NSVP-G
NSVF-G
NSVW-G
NSVP-W
NSVF-W
NSVW-W

Features

- Includes cover, top cap, and top cap adaptor.
- Provides finished appearance in variable-height conditions on exposed connector in straight, 2-way, 3-way or 4-way conditions.
- Install on exposed portion(s) of tallest panel connector.

Specification Tips

- Cover is specified from the lowest to highest panel.
- Top cap of the lower panel requires field cutting of the top cap to accommodate the top cap adaptor provided with the cover.
- The bottom of the cover coped to fit over the top cap on the lower panel.
- If the tallest panel in the **in-line intersection** has a grooved top cap, a variable height cover with a grooved top cap is required.
- All 2-way, 3-way, or 4-way intersections with different height panels require standard variable height covers, regardless of the panel top cap type; standard or grooved.

To Order, Specify:

Standard or Grooved Top Cap w/Painted Cover

- 1) Product number.
- 2) Trim color for cover.*
- 3) Trim color for top cap.*

Standard or Grooved Top Cap w/Fabric Cover

- 1) Product number.
- 2) Fabric/colorway for cover.
- 3) Trim color for top cap.*

Grooved Top Cap w/Wood Cover

- 1) Product number.
- 2) Wood finish for cover.
- 3) Trim color for top cap.*

Wood Top Cap w/Painted Cover

- 1) Product number.
- 2) Trim color for cover.*
- 3) Wood finish for top cap.

Wood Top Cap w/Fabric Cover

- 1) Product number.
- 2) Fabric/colorway for cover.
- 3) Wood finish for top cap.

Wood Top Cap w/Wood Cover

- 1) Product number.
- 2) Wood finish for cover.
- 3) Wood finish for top cap.

***Note:** Upcharge for mixed grade trim surfaces, refer to the electronic catalog for pricing.

Panel Connectors and Trim Covers

Variable-Height Covers — Sectional Cover

Panel Heights		Kit Quantity			Painted Cover Number	Trim A	Fabric Cover Number	Trim A Fabric Grade		C	E	F	G	
Lowest	Highest	6"	10"	16"				A	B					
Standard Top Cap														
32"(813mm)	42"(1067mm)	1			NSVP-3242-S	\$ 34.27	NSVF-3242-S	\$ 74.60	\$ 81.06	\$ 88.71	\$105.36	\$116.77	\$123.24	
	48"(1219mm)	1			NSVP-3248-S	39.67	NSVF-3248-S	81.20	88.68	97.41	116.52	129.49	136.98	
	58"(1473mm)	1	1		NSVP-3258-S	73.38	NSVF-3258-S	114.91	127.44	142.35	172.70	194.66	206.64	
	64"(1626mm)	2			NSVP-3264-S	81.24	NSVF-3264-S	163.22	183.06	205.28	254.72	287.92	307.77	
	74"(1880mm)	1	2		NSVP-3274-S	114.95	NSVF-3274-S	196.93	221.82	250.22	310.90	353.09	377.43	
	80"(2032mm)	3			NSVP-3280-S	122.81	NSVF-3280-S	245.24	277.44	313.15	392.92	446.35	478.56	
42"(1067mm)	48"(1219mm)	1			NSVP-4248-S	\$ 30.67	NSVF-4248-S	\$ 70.20	\$ 75.98	\$ 82.91	\$ 97.92	\$108.29	\$114.08	
	58"(1473mm)	1	1		NSVP-4258-S	64.38	NSVF-4258-S	103.91	114.74	127.85	154.10	173.46	183.74	
	64"(1626mm)	1	1		NSVP-4264-S	72.24	NSVF-4264-S	152.22	170.36	190.78	236.12	266.72	284.87	
	74"(1880mm)	1	1	1	NSVP-4274-S	105.95	NSVF-4274-S	185.93	209.12	235.72	292.30	331.89	354.53	
	80"(2032mm)	1	2		NSVP-4280-S	113.81	NSVF-4280-S	234.24	264.74	298.65	374.32	425.15	455.66	
	48"(1219mm)	58"(1473mm)	1			NSVP-4858-S	\$ 34.27	NSVF-4858-S	\$ 74.60	\$ 81.06	\$ 88.71	\$105.36	\$116.77	\$123.24
64"(1626mm)		1			NSVP-4864-S	39.67	NSVF-4864-S	81.20	88.68	97.41	116.52	129.49	136.98	
74"(1880mm)		1	1		NSVP-4874-S	73.38	NSVF-4874-S	114.91	127.44	142.35	172.70	194.66	206.64	
80"(2032mm)		2			NSVP-4880-S	81.24	NSVF-4880-S	163.22	183.06	205.28	254.72	287.92	307.77	
58"(1473mm)		64"(1626mm)	1			NSVP-5864-S	\$ 30.67	NSVF-5864-S	\$ 70.20	\$ 75.98	\$ 82.91	\$ 97.92	\$108.29	\$114.08
		74"(1880mm)	1	1		NSVP-5874-S	64.38	NSVF-5874-S	103.91	114.74	127.85	154.10	173.46	183.74
64"(1626mm)	80"(2032mm)	1	1		NSVP-5880-S	72.24	NSVF-5880-S	152.22	170.36	190.78	236.12	266.72	284.87	
	74"(1880mm)	1			NSVP-6474-S	\$ 34.27	NSVF-6474-S	\$ 74.60	\$ 81.06	\$ 88.71	\$105.36	\$116.77	\$123.24	
	80"(2032mm)	1			NSVP-6480-S	39.67	NSVF-6480-S	81.20	88.68	97.41	116.52	129.49	136.98	
74"(1880mm)	80"(2032mm)	1			NSVP-7480-S	\$ 30.67	NSVF-7480-S	\$ 70.20	\$ 75.98	\$ 82.91	\$ 97.92	\$108.29	\$114.08	
Grooved Top Cap														
32"(813mm)	42"(1067mm)	1			NSVP-3242-G	\$ 42.70	NSVF-3242-G	\$ 83.03	\$ 89.49	\$ 97.14	\$113.79	\$125.20	\$131.67	
	48"(1219mm)	1			NSVP-3248-G	48.10	NSVF-3248-G	89.63	97.11	105.84	124.95	137.92	145.41	
	58"(1473mm)	1	1		NSVP-3258-G	81.81	NSVF-3258-G	123.34	135.87	150.78	181.13	203.09	215.07	
	64"(1626mm)	2			NSVP-3264-G	89.67	NSVF-3264-G	171.65	191.49	213.71	263.15	296.35	316.20	
	74"(1880mm)	1	2		NSVP-3274-G	123.38	NSVF-3274-G	205.36	230.25	258.65	319.33	361.52	385.86	
	80"(2032mm)	3			NSVP-3280-G	131.24	NSVF-3280-G	253.67	285.87	321.58	401.35	454.78	486.99	
42"(1067mm)	48"(1219mm)	1			NSVP-4248-G	\$ 39.10	NSVF-4248-G	\$ 78.63	\$ 84.41	\$ 91.34	\$106.35	\$116.72	\$122.51	
	58"(1473mm)	1	1		NSVP-4258-G	72.81	NSVF-4258-G	112.34	123.17	136.28	162.53	181.89	192.17	
	64"(1626mm)	1	1		NSVP-4264-G	80.67	NSVF-4264-G	160.65	178.79	199.21	244.55	275.15	293.30	
	74"(1880mm)	1	1	1	NSVP-4274-G	114.38	NSVF-4274-G	194.36	217.55	244.15	300.73	340.32	362.96	
	80"(2032mm)	1	2		NSVP-4280-G	122.24	NSVF-4280-G	242.67	273.17	307.08	382.75	433.58	464.09	
	48"(1219mm)	58"(1473mm)	1			NSVP-4858-G	\$ 42.70	NSVF-4858-G	\$ 83.03	\$ 89.49	\$ 97.14	\$113.79	\$125.20	\$131.67
64"(1626mm)		1			NSVP-4864-G	48.10	NSVF-4864-G	89.63	97.11	105.84	124.95	137.92	145.41	
74"(1880mm)		1	1		NSVP-4874-G	81.81	NSVF-4874-G	123.34	135.87	150.78	181.13	203.09	215.07	
80"(2032mm)		2			NSVP-4880-G	89.67	NSVF-4880-G	171.65	191.49	213.71	263.15	296.35	316.20	
58"(1473mm)		64"(1626mm)	1			NSVP-5864-G	\$ 39.10	NSVF-5864-G	\$ 78.63	\$ 84.41	\$ 91.34	\$106.35	\$116.72	\$122.51
		74"(1880mm)	1	1		NSVP-5874-G	72.81	NSVF-5874-G	112.34	123.17	136.28	162.53	181.89	192.17
	80"(2032mm)	1	1		NSVP-5880-G	80.67	NSVF-5880-G	160.65	178.79	199.21	244.55	275.15	293.30	
64"(1626mm)	74"(1880mm)	1			NSVP-6474-G	\$ 42.70	NSVF-6474-G	\$ 83.03	\$ 89.49	\$ 97.14	\$113.79	\$125.20	\$131.67	
	80"(2032mm)	1			NSVP-6480-G	48.10	NSVF-6480-G	89.63	97.11	105.84	124.95	137.92	145.41	
74"(1880mm)	80"(2032mm)	1			NSVP-7480-G	\$ 39.10	NSVF-7480-G	\$ 78.63	\$ 84.41	\$ 91.34	\$106.35	\$116.72	\$122.51	

Panel Connectors and Trim Covers

Variable-Height Covers — Sectional Cover

Panel Heights		Kit Quantity			Painted Cover Number	Trim B	Fabric Cover Number	Trim B		Fabric Grade				
Lowest	Highest	6"	10"	16"				A	B	C	E	F	G	
Standard Top Cap														
32"(813mm)	42"(1067mm)	1			NSVP-3242-S	\$ 37.63	NSVF-3242-S	\$ 75.16	\$ 81.62	\$ 89.27	\$105.92	\$117.33	\$123.80	
	48"(1219mm)		1		NSVP-3248-S	43.69	NSVF-3248-S	81.76	89.24	97.97	117.08	130.05	137.54	
	58"(1473mm)	1	1		NSVP-3258-S	79.65	NSVF-3258-S	115.47	128.00	142.91	173.26	195.22	207.20	
	64"(1626mm)		2		NSVP-3264-S	87.51	NSVF-3264-S	163.78	183.62	205.84	255.28	288.48	308.33	
	74"(1880mm)	1	2		NSVP-3274-S	123.47	NSVF-3274-S	197.49	222.38	250.78	311.46	353.65	377.99	
	80"(2032mm)		3		NSVP-3280-S	131.33	NSVF-3280-S	245.80	278.00	313.71	393.48	446.91	479.12	
42"(1067mm)	48"(1219mm)	1			NSVP-4248-S	\$ 33.59	NSVF-4248-S	\$ 70.76	\$ 76.54	\$ 83.47	\$ 98.48	\$108.85	\$114.64	
	58"(1473mm)	1	1		NSVP-4258-S	69.55	NSVF-4258-S	104.47	115.30	128.41	154.66	174.02	184.30	
	64"(1626mm)	1		1	NSVP-4264-S	77.41	NSVF-4264-S	152.78	170.92	191.34	236.68	267.28	285.43	
	74"(1880mm)	1	1	1	NSVP-4274-S	113.37	NSVF-4274-S	186.49	209.68	236.28	292.86	332.45	355.09	
	80"(2032mm)	1		2	NSVP-4280-S	121.23	NSVF-4280-S	234.80	265.30	299.21	374.88	425.71	456.22	
48"(1219mm)	58"(1473mm)	1			NSVP-4858-S	\$ 37.63	NSVF-4858-S	\$ 75.16	\$ 81.62	\$ 89.27	\$105.92	\$117.33	\$123.80	
	64"(1626mm)			1	NSVP-4864-S	43.69	NSVF-4864-S	81.76	89.24	97.97	117.08	130.05	137.54	
	74"(1880mm)	1	1		NSVP-4874-S	79.65	NSVF-4874-S	115.47	128.00	142.91	173.26	195.22	207.20	
	80"(2032mm)			2	NSVP-4880-S	87.51	NSVF-4880-S	163.78	183.62	205.84	255.28	288.48	308.33	
58"(1473mm)	64"(1626mm)	1			NSVP-5864-S	\$ 33.59	NSVF-5864-S	\$ 70.76	\$ 76.54	\$ 83.47	\$ 98.48	\$108.85	\$114.64	
	74"(1880mm)	1	1		NSVP-5874-S	69.55	NSVF-5874-S	104.47	115.30	128.41	154.66	174.02	184.30	
	80"(2032mm)	1		1	NSVP-5880-S	77.41	NSVF-5880-S	152.78	170.92	191.34	236.68	267.28	285.43	
64"(1626mm)	74"(1880mm)	1			NSVP-6474-S	\$ 37.63	NSVF-6474-S	\$ 75.16	\$ 81.62	\$ 89.27	\$105.92	\$117.33	\$123.80	
	80"(2032mm)			1	NSVP-6480-S	43.69	NSVF-6480-S	81.76	89.24	97.97	117.08	130.05	137.54	
74"(1880mm)	80"(2032mm)	1			NSVP-7480-S	\$ 33.59	NSVF-7480-S	\$ 70.76	\$ 76.54	\$ 83.47	\$ 98.48	\$108.85	\$114.64	
Grooved Top Cap														
32"(813mm)	42"(1067mm)	1			NSVP-3242-G	\$ 46.62	NSVF-3242-G	\$ 84.15	\$ 90.61	\$ 98.26	\$114.91	\$126.32	\$132.79	
	48"(1219mm)		1		NSVP-3248-G	52.68	NSVF-3248-G	90.75	98.23	106.96	126.07	139.04	146.53	
	58"(1473mm)	1	1		NSVP-3258-G	88.64	NSVF-3258-G	124.46	136.99	151.90	182.25	204.21	216.19	
	64"(1626mm)		2		NSVP-3264-G	96.50	NSVF-3264-G	172.77	192.61	214.83	264.27	297.47	317.32	
	74"(1880mm)	1	2		NSVP-3274-G	132.46	NSVF-3274-G	206.48	231.37	259.77	320.45	362.64	386.98	
	80"(2032mm)		3		NSVP-3280-G	140.32	NSVF-3280-G	254.79	286.99	322.70	402.47	455.90	488.11	
42"(1067mm)	48"(1219mm)	1			NSVP-4248-G	\$ 42.58	NSVF-4248-G	\$ 79.75	\$ 85.53	\$ 92.46	\$107.47	\$117.84	\$123.63	
	58"(1473mm)	1	1		NSVP-4258-G	78.54	NSVF-4258-G	113.46	124.29	137.40	163.65	183.01	193.29	
	64"(1626mm)	1		1	NSVP-4264-G	86.40	NSVF-4264-G	161.77	179.91	200.33	245.67	276.27	294.42	
	74"(1880mm)	1	1	1	NSVP-4274-G	122.36	NSVF-4274-G	195.48	218.67	245.27	301.85	341.44	364.08	
	80"(2032mm)	1		2	NSVP-4280-G	130.22	NSVF-4280-G	243.79	274.29	308.20	383.87	434.70	465.21	
48"(1219mm)	58"(1473mm)	1			NSVP-4858-G	\$ 46.62	NSVF-4858-G	\$ 84.15	\$ 90.61	\$ 98.26	\$114.91	\$126.32	\$132.79	
	64"(1626mm)			1	NSVP-4864-G	52.68	NSVF-4864-G	90.75	98.23	106.96	126.07	139.04	146.53	
	74"(1880mm)	1	1		NSVP-4874-G	88.64	NSVF-4874-G	124.46	136.99	151.90	182.25	204.21	216.19	
	80"(2032mm)			2	NSVP-4880-G	96.50	NSVF-4880-G	172.77	192.61	214.83	264.27	297.47	317.32	
58"(1473mm)	64"(1626mm)	1			NSVP-5864-G	\$ 42.58	NSVF-5864-G	\$ 79.75	\$ 85.53	\$ 92.46	\$107.47	\$117.84	\$123.63	
	74"(1880mm)	1	1		NSVP-5874-G	78.54	NSVF-5874-G	113.46	124.29	137.40	163.65	183.01	193.29	
	80"(2032mm)	1		1	NSVP-5880-G	86.40	NSVF-5880-G	161.77	179.91	200.33	245.67	276.27	294.42	
64"(1626mm)	74"(1880mm)	1			NSVP-6474-G	\$ 46.62	NSVF-6474-G	\$ 84.15	\$ 90.61	\$ 98.26	\$114.91	\$126.32	\$132.79	
	80"(2032mm)			1	NSVP-6480-G	52.68	NSVF-6480-G	90.75	98.23	106.96	126.07	139.04	146.53	
74"(1880mm)	80"(2032mm)	1			NSVP-7480-G	\$ 42.58	NSVF-7480-G	\$ 79.75	\$ 85.53	\$ 92.46	\$107.47	\$117.84	\$123.63	

Panel Connectors and Trim Covers

Variable-Height Covers — Sectional Cover

Panel Heights		Kit Quantity			Painted Cover Number	Trim A	Trim B	Fabric Cover Number	Fabric Grade		C	E	F	G
Lowest	Highest	6"	10"	16"					A	B				
Wood Top Cap — Wood Group A														
32"(813mm)	42"(1067mm)	1			NSVP-3242-W	\$ 84.27	\$ 87.07	NSVF-3242-W	\$124.60	\$131.06	\$138.71	\$155.36	\$166.77	\$173.24
	48"(1219mm)	1			NSVP-3248-W	89.67	93.13	NSVF-3248-W	131.20	138.68	147.41	166.52	179.49	186.98
	58"(1473mm)	1	1		NSVP-3258-W	123.38	129.09	NSVF-3258-W	164.91	177.44	192.35	222.70	244.66	256.64
	64"(1626mm)	2			NSVP-3264-W	131.24	136.95	NSVF-3264-W	213.22	233.06	255.28	304.72	337.92	357.77
	74"(1880mm)	1	2		NSVP-3274-W	164.95	172.91	NSVF-3274-W	246.93	271.82	300.22	360.90	403.09	427.43
	80"(2032mm)	3			NSVP-3280-W	172.81	180.77	NSVF-3280-W	295.24	327.44	363.15	442.92	496.35	528.56
42"(1067mm)	48"(1219mm)	1			NSVP-4248-W	\$ 80.67	\$ 83.03	NSVF-4248-W	\$120.20	\$125.98	\$132.91	\$147.92	\$158.29	\$164.08
	58"(1473mm)	1	1		NSVP-4258-W	114.38	118.99	NSVF-4258-W	153.91	164.74	177.85	204.10	223.46	233.74
	64"(1626mm)	1	1		NSVP-4264-W	122.24	126.85	NSVF-4264-W	202.22	220.36	240.78	286.12	316.72	334.87
	74"(1880mm)	1	1	1	NSVP-4274-W	155.95	162.81	NSVF-4274-W	235.93	259.12	285.72	342.30	381.89	404.53
	80"(2032mm)	1	2		NSVP-4280-W	163.81	170.67	NSVF-4280-W	284.24	314.74	348.65	424.32	475.15	505.66
48"(1219mm)	58"(1473mm)	1			NSVP-4858-W	\$ 84.27	\$ 87.07	NSVF-4858-W	\$124.60	\$131.06	\$138.71	\$155.36	\$166.77	\$173.24
	64"(1626mm)	1			NSVP-4864-W	89.67	93.13	NSVF-4864-W	131.20	138.68	147.41	166.52	179.49	186.98
	74"(1880mm)	1	1		NSVP-4874-W	123.38	129.09	NSVF-4874-W	164.91	177.44	192.35	222.70	244.66	256.64
	80"(2032mm)	2			NSVP-4880-W	131.24	136.95	NSVF-4880-W	213.22	233.06	255.28	304.72	337.92	357.77
58"(1473mm)	64"(1626mm)	1			NSVP-5864-W	\$ 80.67	\$ 83.03	NSVF-5864-W	\$120.20	\$125.98	\$132.91	\$147.92	\$158.29	\$164.08
	74"(1880mm)	1	1		NSVP-5874-W	114.38	118.99	NSVF-5874-W	153.91	164.74	177.85	204.10	223.46	233.74
	80"(2032mm)	1	1		NSVP-5880-W	122.24	126.85	NSVF-5880-W	202.22	220.36	240.78	286.12	316.72	334.87
64"(1626mm)	74"(1880mm)	1			NSVP-6474-W	\$ 84.27	\$ 87.07	NSVF-6474-W	\$124.60	\$131.06	\$138.71	\$155.36	\$166.77	\$173.24
	80"(2032mm)	1			NSVP-6480-W	89.67	93.13	NSVF-6480-W	131.20	138.68	147.41	166.52	179.49	186.98
74"(1880mm)	80"(2032mm)	1			NSVP-7480-W	\$ 80.67	\$ 83.03	NSVF-7480-W	\$120.20	\$125.98	\$132.91	\$147.92	\$158.29	\$164.08
Wood Top Cap — Wood Group B														
32"(813mm)	42"(1067mm)	1			NSVP-3242-W	\$ 93.26	\$ 96.06	NSVF-3242-W	\$133.59	\$140.05	\$147.70	\$164.35	\$175.76	\$182.23
	48"(1219mm)	1			NSVP-3248-W	98.66	102.12	NSVF-3248-W	140.19	147.67	156.40	175.51	188.48	195.97
	58"(1473mm)	1	1		NSVP-3258-W	132.37	138.08	NSVF-3258-W	173.90	186.43	201.34	231.69	253.65	265.63
	64"(1626mm)	2			NSVP-3264-W	140.23	145.94	NSVF-3264-W	222.21	242.05	264.27	313.71	346.91	366.76
	74"(1880mm)	1	2		NSVP-3274-W	173.94	181.90	NSVF-3274-W	255.92	280.81	309.21	369.89	412.08	436.42
	80"(2032mm)	3			NSVP-3280-W	181.80	189.76	NSVF-3280-W	304.23	336.43	372.14	451.91	505.34	537.55
42"(1067mm)	48"(1219mm)	1			NSVP-4248-W	\$ 89.66	\$ 92.02	NSVF-4248-W	\$129.19	\$134.97	\$141.90	\$156.91	\$167.28	\$173.07
	58"(1473mm)	1	1		NSVP-4258-W	123.37	127.98	NSVF-4258-W	162.90	173.73	186.84	213.09	232.45	242.73
	64"(1626mm)	1	1		NSVP-4264-W	131.23	135.84	NSVF-4264-W	211.21	229.35	249.77	295.11	325.71	343.86
	74"(1880mm)	1	1	1	NSVP-4274-W	164.94	171.80	NSVF-4274-W	244.92	268.11	294.71	351.29	390.88	413.52
	80"(2032mm)	1	2		NSVP-4280-W	172.80	179.66	NSVF-4280-W	293.23	323.73	357.64	433.31	484.14	514.65
48"(1219mm)	58"(1473mm)	1			NSVP-4858-W	\$ 93.26	\$ 96.06	NSVF-4858-W	\$133.59	\$140.05	\$147.70	\$164.35	\$175.76	\$182.23
	64"(1626mm)	1			NSVP-4864-W	98.66	102.12	NSVF-4864-W	140.19	147.67	156.40	175.51	188.48	195.97
	74"(1880mm)	1	1		NSVP-4874-W	132.37	138.08	NSVF-4874-W	173.90	186.43	201.34	231.69	253.65	265.63
	80"(2032mm)	2			NSVP-4880-W	140.23	145.94	NSVF-4880-W	222.21	242.05	264.27	313.71	346.91	366.76
58"(1473mm)	64"(1626mm)	1			NSVP-5864-W	\$ 89.66	\$ 92.02	NSVF-5864-W	\$129.19	\$134.97	\$141.90	\$156.91	\$167.28	\$173.07
	74"(1880mm)	1	1		NSVP-5874-W	123.37	127.98	NSVF-5874-W	162.90	173.73	186.84	213.09	232.45	242.73
	80"(2032mm)	1	1		NSVP-5880-W	131.23	135.84	NSVF-5880-W	211.21	229.35	249.77	295.11	325.71	343.86
64"(1626mm)	74"(1880mm)	1			NSVP-6474-W	\$ 93.26	\$ 96.06	NSVF-6474-W	\$133.59	\$140.05	\$147.70	\$164.35	\$175.76	\$182.23
	80"(2032mm)	1			NSVP-6480-W	98.66	102.12	NSVF-6480-W	140.19	147.67	156.40	175.51	188.48	195.97
74"(1880mm)	80"(2032mm)	1			NSVP-7480-W	\$ 89.66	\$ 92.02	NSVF-7480-W	\$129.19	\$134.97	\$141.90	\$156.91	\$167.28	\$173.07

Panel Connectors and Trim Covers


Variable-Height Covers — Sectional Cover

Panel Heights		Kit Quantity			Wood Cover Number	Wood Group A	Trim B	Wood Group B	Trim B
Lowest	Highest	6"	10"	16"		Trim A		Trim A	
Grooved Top Cap									
32"(813mm)	42"(1067mm)		1		NSVW-3242-G	\$135.97	\$137.09	\$154.52	\$155.64
	48"(1219mm)			1	NSVW-3248-G	144.55	145.67	164.66	165.78
	58"(1473mm)		1	1	NSVW-3258-G	173.16	174.28	198.37	199.49
	64"(1626mm)			2	NSVW-3264-G	214.21	215.33	246.68	247.80
	74"(1880mm)		1	2	NSVW-3274-G	242.82	243.94	280.39	281.51
	80"(2032mm)			3	NSVW-3280-G	283.87	284.99	328.70	329.82
42"(1067mm)	48"(1219mm)	1			NSVW-4248-G	\$130.25	\$131.37	\$147.76	\$148.88
	58"(1473mm)	1	1		NSVW-4258-G	158.86	159.98	181.47	182.59
	64"(1626mm)	1		1	NSVW-4264-G	199.91	201.03	229.78	230.90
	74"(1880mm)	1	1	1	NSVW-4274-G	228.52	229.64	263.49	264.61
	80"(2032mm)	1		2	NSVW-4280-G	269.57	270.69	311.80	312.92
48"(1219mm)	58"(1473mm)		1		NSVW-4858-G	\$135.97	\$137.09	\$154.52	\$155.64
	64"(1626mm)			1	NSVW-4864-G	144.55	145.67	164.66	165.78
	74"(1880mm)		1	1	NSVW-4874-G	173.16	174.28	198.37	199.49
	80"(2032mm)			2	NSVW-4880-G	214.21	215.33	246.68	247.80
58"(1473mm)	64"(1626mm)	1			NSVW-5864-G	\$130.25	\$131.37	\$147.76	\$148.88
	74"(1880mm)	1	1		NSVW-5874-G	158.86	159.98	181.47	182.59
	80"(2032mm)	1		1	NSVW-5880-G	199.91	201.03	229.78	230.90
64"(1626mm)	74"(1880mm)		1		NSVW-6474-G	\$135.97	\$137.09	\$154.52	\$155.64
	80"(2032mm)			1	NSVW-6480-G	144.55	145.67	164.66	165.78
74"(1880mm)	80"(2032mm)	1			NSVW-7480-G	\$130.25	\$131.37	\$147.76	\$148.88

					Wood Cover Number	Wood Group A	Wood Group B	
Wood Top Cap								
32"(813mm)	42"(1067mm)	1			NSVW-3242-W	\$177.54	\$205.08	
	48"(1219mm)			1	NSVW-3248-W	186.12	215.22	
	58"(1473mm)		1	1	NSVW-3258-W	214.73	248.93	
	64"(1626mm)			2	NSVW-3264-W	255.78	297.24	
	74"(1880mm)		1	2	NSVW-3274-W	284.39	330.95	
	80"(2032mm)			3	NSVW-3280-W	325.44	379.26	
42"(1067mm)	48"(1219mm)	1			NSVW-4248-W	\$171.82	\$198.32	
	58"(1473mm)	1	1		NSVW-4258-W	200.43	232.03	
	64"(1626mm)	1		1	NSVW-4264-W	241.48	280.34	
	74"(1880mm)	1	1	1	NSVW-4274-W	270.09	314.05	
	80"(2032mm)	1		2	NSVW-4280-W	311.14	362.36	
48"(1219mm)	58"(1473mm)		1		NSVW-4858-W	\$177.54	\$205.08	
	64"(1626mm)			1	NSVW-4864-W	186.12	215.22	
	74"(1880mm)		1	1	NSVW-4874-W	214.73	248.93	
	80"(2032mm)			2	NSVW-4880-W	255.78	297.24	
58"(1473mm)	64"(1626mm)	1			NSVW-5864-W	\$171.82	\$198.32	
	74"(1880mm)	1	1		NSVW-5874-W	200.43	232.03	
	80"(2032mm)	1		1	NSVW-5880-W	241.48	280.34	
64"(1626mm)	74"(1880mm)		1		NSVW-6474-W	\$177.54	\$205.08	
	80"(2032mm)			1	NSVW-6480-W	186.12	215.22	
74"(1880mm)	80"(2032mm)	1			NSVW-7480-W	\$171.82	\$198.32	

Panel Connectors and Trim Covers

Variable-Height Covers — Starter Cover



NBVP-S
NBVF-S
NBVP-G
NBVF-G
NBVW-G
NBVP-W
NBVF-W
NBVW-W

Features

- Includes cover, top cap, and top cap adaptor.
- Provides finished appearance in variable-height conditions on exposed connector in straight, 2-way, 3-way or 4-way conditions.
- Install on exposed portion(s) of tallest panel connector.

Specification Tips

- Used when one or more panel configuration(s) in the intersection are other than a monolithic height.
- Specify cover height to correspond with exposed connector.
- Top cap of the lower panel requires field cutting to accommodate the top cap adaptor provided with the cover.
- The bottom of the cover is coped to fit over the top cap on the lower panel.
- If the tallest panel in the **in-line intersection** has a grooved top cap, a variable height cover with a grooved top cap is required.
- All 2-way, 3-way, or 4-way intersections with different height panels require standard variable height covers, regardless of the panel top cap type; standard or grooved.

To Order, Specify:

Standard or Grooved Top Cap w/Painted Cover

- 1) Product number.
- 2) Trim color for cover.*
- 3) Trim color for top cap.*

Standard or Grooved Top Cap w/Fabric Cover

- 1) Product number.
- 2) Fabric/colorway for cover.
- 3) Trim color for top cap.*

Grooved Top Cap w/Wood Cover

- 1) Product number.
- 2) Wood finish for cover.
- 3) Trim color for top cap.*

Wood Top Cap w/Painted Cover

- 1) Product number.
- 2) Trim color for cover.*
- 3) Wood finish for top cap.

Wood Top Cap w/Fabric Cover

- 1) Product number.
- 2) Fabric/colorway for cover.
- 3) Wood finish for top cap.

Wood Top Cap w/Wood Cover

- 1) Product number.
- 2) Wood finish for cover.
- 3) Wood finish for top cap.

***Note:** Upcharge for mixed grade trim surfaces, refer to the electronic catalog for pricing.

Panel Connectors and Trim Covers

Variable-Height Covers — Starter Cover

Width	Painted Cover Number	Trim A	Fabric Cover Number	Trim A		C	E	F	G
				Fabric	Grade				
Standard Top Cap									
5" cover	NBVP-5-S	\$29.77	NBVF-5-S	\$ 69.10	\$ 74.71	\$ 81.46	\$ 96.06	\$106.17	\$111.79
6" cover	NBVP-6-S	30.67	NBVF-6-S	70.17	75.94	82.87	97.85	108.23	114.02
10" cover	NBVP-10-S	34.27	NBVF-10-S	74.45	80.86	88.51	105.01	116.47	122.94
11" cover	NBVP-11-S	35.17	NBVF-11-S	75.52	82.09	89.92	106.80	118.53	125.17
16" cover	NBVP-16-S	39.67	NBVF-16-S	80.87	88.24	96.97	115.75	128.83	136.32
21" cover	NBVP-21-S	44.17	NBVF-21-S	86.22	94.39	104.02	124.70	139.13	147.47
22" cover	NBVP-22-S	45.07	NBVF-22-S	87.29	95.62	105.43	126.49	141.19	149.70
27" cover	NBVP-27-S	49.57	NBVF-27-S	92.64	101.77	112.48	135.44	151.49	160.85
32" cover	NBVP-32-S	54.07	NBVF-32-S	97.99	107.92	119.53	144.39	161.79	172.00
38" cover	NBVP-38-S	59.47	NBVF-38-S	104.41	115.30	127.99	155.13	174.15	185.38
48" cover	NBVP-48-S	68.47	NBVF-48-S	115.11	127.60	142.09	173.03	194.75	207.68
Grooved Top Cap									
5" cover	NBVP-5-G	\$38.20	NBVF-5-G	\$ 77.53	\$ 83.14	\$ 89.89	\$104.49	\$114.60	\$120.22
6" cover	NBVP-6-G	39.10	NBVF-6-G	78.60	84.37	91.30	106.28	116.66	122.45
10" cover	NBVP-10-G	42.70	NBVF-10-G	82.88	89.29	96.94	113.44	124.90	131.37
11" cover	NBVP-11-G	43.60	NBVF-11-G	83.95	90.52	98.35	115.23	126.96	133.60
16" cover	NBVP-16-G	48.10	NBVF-16-G	89.30	96.67	105.40	124.18	137.26	144.75
21" cover	NBVP-21-G	52.60	NBVF-21-G	94.65	102.82	112.45	133.13	147.56	155.90
22" cover	NBVP-22-G	53.50	NBVF-22-G	95.72	104.05	113.86	134.92	149.62	158.13
27" cover	NBVP-27-G	58.00	NBVF-27-G	101.07	110.20	120.91	143.87	159.92	169.28
32" cover	NBVP-32-G	62.50	NBVF-32-G	106.42	116.35	127.96	152.82	170.22	180.43
38" cover	NBVP-38-G	67.90	NBVF-38-G	112.84	123.73	136.42	163.56	182.58	193.81
48" cover	NBVP-48-G	76.90	NBVF-48-G	123.54	136.03	150.52	181.46	203.18	216.11

Width	Painted Cover Number	Trim B	Fabric Cover Number	Trim B		C	E	F	G
				Fabric	Grade				
Standard Top Cap									
5" cover	NBVP-5-S	\$32.58	NBVF-5-S	\$ 69.66	\$ 75.27	\$ 82.02	\$ 96.62	\$106.73	\$112.35
6" cover	NBVP-6-S	33.59	NBVF-6-S	70.73	76.50	83.43	98.41	108.79	114.58
10" cover	NBVP-10-S	37.63	NBVF-10-S	75.01	81.42	89.07	105.57	117.03	123.50
11" cover	NBVP-11-S	38.64	NBVF-11-S	76.08	82.65	90.48	107.36	119.09	125.73
16" cover	NBVP-16-S	43.69	NBVF-16-S	81.43	88.80	97.53	116.31	129.39	136.88
21" cover	NBVP-21-S	48.74	NBVF-21-S	86.78	94.95	104.58	125.26	139.69	148.03
22" cover	NBVP-22-S	49.75	NBVF-22-S	87.85	96.18	105.99	127.05	141.75	150.26
27" cover	NBVP-27-S	54.80	NBVF-27-S	93.20	102.33	113.04	136.00	152.05	161.41
32" cover	NBVP-32-S	59.85	NBVF-32-S	98.55	108.48	120.09	144.95	162.35	172.56
38" cover	NBVP-38-S	65.91	NBVF-38-S	104.97	115.86	128.55	155.69	174.71	185.94
48" cover	NBVP-48-S	76.01	NBVF-48-S	115.67	128.16	142.65	173.59	195.31	208.24
Grooved Top Cap									
5" cover	NBVP-5-G	\$41.57	NBVF-5-G	\$ 78.65	\$ 84.26	\$ 91.01	\$105.61	\$115.72	\$121.34
6" cover	NBVP-6-G	42.58	NBVF-6-G	79.72	85.49	92.42	107.40	117.78	123.57
10" cover	NBVP-10-G	46.62	NBVF-10-G	84.00	90.41	98.06	114.56	126.02	132.49
11" cover	NBVP-11-G	47.63	NBVF-11-G	85.07	91.64	99.47	116.35	128.08	134.72
16" cover	NBVP-16-G	52.68	NBVF-16-G	90.42	97.79	106.52	125.30	138.38	145.87
21" cover	NBVP-21-G	57.73	NBVF-21-G	95.77	103.94	113.57	134.25	148.68	157.02
22" cover	NBVP-22-G	58.74	NBVF-22-G	96.84	105.17	114.98	136.04	150.74	159.25
27" cover	NBVP-27-G	63.79	NBVF-27-G	102.19	111.32	122.03	144.99	161.04	170.40
32" cover	NBVP-32-G	68.84	NBVF-32-G	107.54	117.47	129.08	153.94	171.34	181.55
38" cover	NBVP-38-G	74.90	NBVF-38-G	113.96	124.85	137.54	164.68	183.70	194.93
48" cover	NBVP-48-G	85.00	NBVF-48-G	124.66	137.15	151.64	182.58	204.30	217.23

Panel Connectors and Trim Covers

Variable-Height Covers — Starter Cover

Width	Painted Cover Number	Trim A	Trim B	Fabric Cover Number	Trim B Fabric Grade		C	E	F	G
					A	B				
Wood Top Cap — Wood Group A										
5" cover	NBVP-5-W	\$ 79.77	\$ 82.02	NBVF-5-W	\$119.10	\$124.71	\$131.46	\$146.06	\$156.17	\$161.79
6" cover	NBVP-6-W	80.67	83.03	NBVF-6-W	120.17	125.94	132.87	147.85	158.23	164.02
10" cover	NBVP-10-W	84.27	87.07	NBVF-10-W	124.45	130.86	138.51	155.01	166.47	172.94
11" cover	NBVP-11-W	85.17	88.08	NBVF-11-W	125.52	132.09	139.92	156.80	168.53	175.17
16" cover	NBVP-16-W	89.67	93.13	NBVF-16-W	130.87	138.24	146.97	165.75	178.83	186.32
21" cover	NBVP-21-W	94.17	98.18	NBVF-21-W	136.22	144.39	154.02	174.70	189.13	197.47
22" cover	NBVP-22-W	95.07	99.19	NBVF-22-W	137.29	145.62	155.43	176.49	191.19	199.70
27" cover	NBVP-27-W	99.57	104.24	NBVF-27-W	142.64	151.77	162.48	185.44	201.49	210.85
32" cover	NBVP-32-W	104.07	109.29	NBVF-32-W	147.99	157.92	169.53	194.39	211.79	222.00
38" cover	NBVP-38-W	109.47	115.35	NBVF-38-W	154.41	165.30	177.99	205.13	224.15	235.38
48" cover	NBVP-48-W	118.47	125.45	NBVF-48-W	165.11	177.60	192.09	223.03	244.75	257.68
Wood Top Cap — Wood Group B										
5" cover	NBVP-5-W	\$ 88.76	\$ 91.01	NBVF-5-W	\$128.09	\$133.70	\$140.45	\$155.05	\$165.16	\$170.78
6" cover	NBVP-6-W	89.66	92.02	NBVF-6-W	129.16	134.93	141.86	156.84	167.22	173.01
10" cover	NBVP-10-W	93.26	96.06	NBVF-10-W	133.44	139.85	147.50	164.00	175.46	181.93
11" cover	NBVP-11-W	94.16	97.07	NBVF-11-W	134.51	141.08	148.91	165.79	177.52	184.16
16" cover	NBVP-16-W	98.66	102.12	NBVF-16-W	139.86	147.23	155.96	174.74	187.82	195.31
21" cover	NBVP-21-W	103.16	107.17	NBVF-21-W	145.21	153.38	163.01	183.69	198.12	206.46
22" cover	NBVP-22-W	104.06	108.18	NBVF-22-W	146.28	154.61	164.42	185.48	200.18	208.69
27" cover	NBVP-27-W	108.56	113.23	NBVF-27-W	151.63	160.76	171.47	194.43	210.48	219.84
32" cover	NBVP-32-W	113.06	118.28	NBVF-32-W	156.98	166.91	178.52	203.38	220.78	230.99
38" cover	NBVP-38-W	118.46	124.34	NBVF-38-W	163.40	174.29	186.98	214.12	233.14	244.37
48" cover	NBVP-48-W	127.46	134.44	NBVF-48-W	174.10	186.59	201.08	232.02	253.74	266.67

Description	Wood Cover Number	Wood Group A	Trim B	Wood Group B	Trim B
		Trim A		Trim A	
Grooved Top Cap					
5" cover	NBVW-5-G	\$128.82	\$129.94	\$144.94	\$146.06
6" cover	NBVW-6-G	129.77	130.89	146.06	147.18
10" cover	NBVW-10-G	133.57	134.69	150.54	151.66
11" cover	NBVW-11-G	134.52	135.64	151.66	152.78
16" cover	NBVW-16-G	139.27	140.39	157.26	158.38
21" cover	NBVW-21-G	144.02	145.14	162.86	163.98
22" cover	NBVW-22-G	144.97	146.09	163.98	165.10
27" cover	NBVW-27-G	149.72	150.84	169.58	170.70
32" cover	NBVW-32-G	154.47	155.59	175.18	176.30
38" cover	NBVW-38-G	160.17	161.29	181.90	183.02
48" cover	NBVW-48-G	169.67	170.79	193.10	194.22


	Wood Cover Number	Wood Group A	Wood Group B	
Wood Top Cap				
5" cover	NBVW-5-W	\$170.39	\$195.50	
6" cover	NBVW-6-W	171.34	196.62	
10" cover	NBVW-10-W	175.14	201.10	
11" cover	NBVW-11-W	176.09	202.22	
16" cover	NBVW-16-W	180.84	207.82	
21" cover	NBVW-21-W	185.59	213.42	
22" cover	NBVW-22-W	186.54	214.54	
27" cover	NBVW-27-W	191.29	220.14	
32" cover	NBVW-32-W	196.04	225.74	
38" cover	NBVW-38-W	201.74	232.46	
48" cover	NBVW-48-W	211.24	243.66	

Panel Connectors and Trim Covers

Extended Variable-Height Covers

Description	Painted Cover Number	Trim A	Trim B	Fabric Cover Number	Fabric Grade A	B	C	E	F	G
No Top Cap										
10" cover	NXVP-10	\$34.81	\$37.06	NXVF-10	\$ 73.89	\$ 80.30	\$87.95	\$104.45	\$115.91	\$122.38
16" cover	NXVP-16	41.53	43.78	NXVF-16	80.31	87.68	96.41	115.19	128.27	135.76

Description	Wood Cover Number	Wood Group A	Wood Group B
No Top Cap			
10" cover	NXVW-10	\$128.58	\$146.05
16" cover	NXVW-16	139.08	158.17



NXVP
NXVF
NXVW

Features

- Provides finished appearance in variable-height conditions on exposed connector in straight, 2-way, 3-way or 4-way conditions.
- Install on exposed portion(s) of tallest panel connector.
- ◆ Available on RUSH.

Specification Tips

- The bottom of the cover is straight to be used in conjunction with full, sectional or starter variable-height covers.
- Cover is to be used with separately specified panel connector.

To Order, Specify:

Painted Cover

- 1) Product number.
- 2) Trim color for cover.

Fabric Cover

- 1) Product number.
- 2) Fabric/colorway for cover.


Wood Cover

- 1) Product number.
- 2) Wood finish for cover.

Transitional Panel Connectors

Used for Connecting Enhanced PREMISE to PREMISE Panels with 4" Base Raceway

	Height	Number	Price
Enhanced PREMISE Straight Connector to 4" PREMISE Monolithic Panel	32"(813mm)	NABS-32	\$359.91
	42"(1067mm)	NABS-42	395.01
	48"(1219mm)	NABS-48	416.07
	53"(1346mm)	NABS-53	433.62
	64"(1626mm)	NABS-64	472.23
	80"(2032mm)	NABS-80	528.39

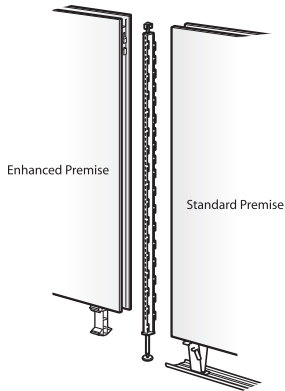

NABS

Features

- Includes leveling glide, carpet gripper, slotted connector, light block, and top cap aligner.
- Connects Enhanced PREMISE panels to 4"(102mm) PREMISE monolithic panels.
- Provides slotted connector for mounting components.
- Standard in black finish color only.
- Shipped assembled.


To Order, Specify:

- 1) Product number.
(No finish specification required).

Specification Tips

- Connector height must be equal to the height of the tallest Enhanced PREMISE panel configuration [up to 80"(2032mm)] or the tallest PREMISE Standard Panel connected, whichever is greater.
- For in-line (straight) condition specify a Transition Connector.
- For 2-way condition specify Transition Connector and an Enhanced PREMISE 2-way Connector with Cover.
- For 3-way condition specify up to two Transition Connectors and an Enhanced PREMISE 3-way Connector with Cover.
- For 4-way condition specify up to three Transition Connectors and an Enhanced PREMISE 4-way Connector.
- **The Transition Connector cannot be attached directly to the corner connector of the PREMISE Standard Panel.**
- Transition connectors for Extended Connectors and Floor to Ceiling Connectors are not available.
- Enhanced PREMISE Connectors in the 2, 3, and 4-way conditions that are replaced with Transition Connectors can be used as Straight Connectors.

Enhanced PREMISE Straight Connector to 4" PREMISE Stack Panel

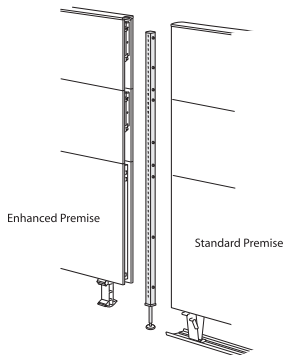

NABK

	Height	Number	Price
Enhanced PREMISE Straight Connector to 4" PREMISE Stack Panel	32"(813mm)	NABK-32	\$359.91
	42"(1067mm)	NABK-42	395.01
	48"(1219mm)	NABK-48	416.07
	58"(1473mm)	NABK-58	451.17
	64"(1626mm)	NABK-64	472.23
	74"(1880mm)	NABK-74	507.33
	80"(2032mm)	NABK-80	528.39

Features

- Includes leveling glide, carpet gripper, slotted connector, light block, and top cap aligner.
- Connects Enhanced PREMISE panels to 4"(102mm) PREMISE stackable panels.
- Provides slotted connector for mounting components.
- Standard in black finish color only.
- Shipped assembled.

To Order, Specify:


- 1) Product number.
(No finish specification required).

Specification Tips

- Connector height must be equal to the height of the tallest Enhanced PREMISE panel configuration [up to 80"(2032mm)] or the tallest PREMISE stackable configuration [up to 80"(2032mm)], whichever is greater.
- For in-line (straight) condition specify a Transition Connector.
- For 2-way condition specify Transition Connector and an Enhanced PREMISE 2-way Connector with Cover, or combine Transition Connector with existing PREMISE Stackable Connectors and Covers.
- For 3-way condition specify up to two Transition Connectors and an Enhanced PREMISE 3-way Connector with Cover, or combine Transition Connectors with existing PREMISE Stackable Connectors and Covers.
- For 4-way condition specify up to three Transition Connectors and an Enhanced PREMISE 4-way Connector, or combine Transition Connector with existing PREMISE Stackable Connectors and Covers.
- **The Transition Connector can be attached directly to the corner connectors of the PREMISE Stackable Panel.**
- Transition connectors for Extended Connectors and Floor to Ceiling Connectors are not available.
- Enhanced PREMISE Connectors in the 2, 3, and 4-way conditions that are replaced with Transition Connectors can be used as Straight Connectors.

Transitional Power Connectors


Used for Connecting Enhanced PREMISE to PREMISE Panels with 4" Base Raceway

	Length	Number	Price
Enhanced 3-Circuit PREMISE to 4" PREMISE Flexible Power Connector	5 1/4"(133mm)	2561-4020	\$251.24
	Features	To Order, Specify:	
	<ul style="list-style-type: none">• Includes one power connector with safety latches for securing connector to adjacent power blocks.• Continue base raceway power from Enhanced PREMISE to 4"(102mm) PREMISE in-line, 90° and across 3"(76mm) panel intersections.• Standard in black finish color only.	1) Product number. (No finish specification required).	
	Specification Tips	<ul style="list-style-type: none">• Transition power connectors cannot be coupled together.• Specify for use in base raceway only.	

Panel Complements

Wing Walls

Full Height One-Piece



NSWF

Height	Width	Number	Laminate A Trim A	Trim B	Laminate B Trim A	Trim B
42"(1067mm)	24"(610mm)	NSWF-4224	\$443.25	\$456.11	\$508.06	\$520.92
	30"(762mm)	NSWF-4230	499.96	512.82	580.98	593.84
	36"(914mm)	NSWF-4236	556.67	569.53	653.90	666.76
	42"(1067mm)	NSWF-4242	613.38	626.24	726.82	739.68
	48"(1219mm)	NSWF-4248	670.09	682.95	799.74	812.60
48"(1219mm)	24"(610mm)	NSWF-4824	\$484.89	\$497.75	\$556.66	\$569.52
	30"(762mm)	NSWF-4830	541.60	554.46	629.58	642.44
	36"(914mm)	NSWF-4836	598.31	611.17	702.50	715.36
	42"(1067mm)	NSWF-4842	655.02	667.88	775.42	788.28
	48"(1219mm)	NSWF-4848	711.73	724.59	848.34	861.20
53"(1346mm)	24"(610mm)	NSWF-5324	\$519.59	\$532.45	\$597.16	\$610.02
	30"(762mm)	NSWF-5330	576.30	589.16	670.08	682.94
	36"(914mm)	NSWF-5336	633.01	645.87	743.00	755.86
	42"(1067mm)	NSWF-5342	689.72	702.58	815.92	828.78
	48"(1219mm)	NSWF-5348	746.43	759.29	888.84	901.70
64"(1626mm)	24"(610mm)	NSWF-6424	\$595.93	\$608.79	\$686.26	\$699.12
	30"(762mm)	NSWF-6430	652.64	665.50	759.18	772.04
	36"(914mm)	NSWF-6436	709.35	722.21	832.10	844.96
	42"(1067mm)	NSWF-6442	766.06	778.92	905.02	917.88
	48"(1219mm)	NSWF-6448	822.77	835.63	977.94	990.80

Features

- Includes laminate wing wall with 1mm edgeband, attachment hardware and one adjustable glide with carpet gripper. Attachment hardware includes:
 - Wing wall-to-panel attachment brackets, which connect into panel connector slots.
 - Wing wall-to-worksurface attachment brackets (one pair) with round fasteners, which support one side/end of the adjoining worksurface of equal or less depth. The L-brackets are non-handed and mount to the underside of a worksurface. Round fasteners standard in black finish.
- No power or communications capability within wing wall. Wing wall design allows easy access to base raceway of panel.
- Provides same support as a comparably sized return panel. May also provide visual privacy and defines space by creating boundaries.
- Wing walls may be installed in left-hand or right-hand conditions. No additional hardware required for a handed condition.
- Wing wall glide provides 2"(51mm) adjustment. With glide fully retracted the wing wall design allows the worksurface to be mounted at a 28 1/2"(724mm) height.
- Wing wall thickness is 3/4"(19mm). Does not add to length of panel run.
- Shipped unassembled.
- Available on RUSH.

To Order, Specify:

- Product number.
- Laminate color for wing wall.
- Trim color for edgeband.
- Trim color for hardware.


Specification Tips

- Wing wall must be mounted perpendicular to adjacent panels of equal or greater height.
- When a wing wall is located at the end of a panel run, specify an End-of-Run panel connector with cover.
- To center mount a Full Height One-Piece Wing Wall, separately specify Center Mount Hardware (NSWH-2).
- Upper structure components cannot be mounted directly onto wing wall.
- Full height one-piece wing walls cannot be used between two adjacent panel mounted components.
- Finished installation height will be 1/4"(6mm) below the panel for a 48"(1219mm) high wing wall.
- Can be used with open base panels.
- See Specification Guide for planning and application guidelines.

Panel Complements

Wing Walls

Full Height Two-Piece



NSWS

Height	Width	Number	Laminate A Trim A	Trim B	Laminate B Trim A	Trim B
42"(1067mm)	24"(610mm)	NSWS-4224	\$528.89	\$541.75	\$613.37	\$ 626.23
	30"(762mm)	NSWS-4230	572.87	585.73	664.29	677.15
	36"(914mm)	NSWS-4236	616.85	629.71	715.21	728.07
	42"(1067mm)	NSWS-4242	660.83	673.69	766.13	778.99
	48"(1219mm)	NSWS-4248	704.81	717.67	817.05	829.91
48"(1219mm)	24"(610mm)	NSWS-4824	\$570.53	\$583.39	\$661.97	\$ 674.83
	30"(762mm)	NSWS-4830	614.51	627.37	712.89	725.75
	36"(914mm)	NSWS-4836	658.49	671.35	763.81	776.67
	42"(1067mm)	NSWS-4842	702.47	715.33	814.73	827.59
	48"(1219mm)	NSWS-4848	746.45	759.31	865.65	878.51
53"(1346mm)	24"(610mm)	NSWS-5324	\$605.23	\$618.09	\$702.47	\$ 715.33
	30"(762mm)	NSWS-5330	649.21	662.07	753.39	766.25
	36"(914mm)	NSWS-5336	693.19	706.05	804.31	817.17
	42"(1067mm)	NSWS-5342	737.17	750.03	855.23	868.09
	48"(1219mm)	NSWS-5348	781.15	794.01	906.15	919.01
64"(1626mm)	24"(610mm)	NSWS-6424	\$681.57	\$694.43	\$791.57	\$ 804.43
	30"(762mm)	NSWS-6430	725.55	738.41	842.49	855.35
	36"(914mm)	NSWS-6436	769.53	782.39	893.41	906.27
	42"(1067mm)	NSWS-6442	813.51	826.37	944.33	957.19
	48"(1219mm)	NSWS-6448	857.49	870.35	995.25	1008.11

Features

- Includes laminate wing wall with 1mm edgeband, attachment hardware and one adjustable glide with carpet gripper. Attachment hardware includes:
 - Wing wall-to-panel attachment brackets, which connect into panel connector slots.
 - Lower wing wall-to-worksurface attachment brackets (two pair) with round fasteners, which support one side/end of up to two adjoining worksurfaces of equal depth. The L-brackets are non-handed and mount to the underside of a worksurface. Round fasteners standard in black finish.
 - Upper wing wall-to-worksurface attachment brackets (one pair) which support front edge of wing wall. Brackets friction fit to the top of worksurface.
 - Center mount hardware to mount upper and lower wing wall centerline of panel connector, if required by product application. Standard in black finish.
- Lower unit provides support for one worksurface in a handed condition **or** two worksurfaces in a shared condition.
- Lower unit provides same support as a comparably sized return panel.
- Lower unit may be installed in left-hand, right-hand, or shared conditions. No additional hardware required.
- Upper unit provides visual privacy above the worksurface. Also defines space by creating boundaries.
- No power or communications capability within wing wall. Wing wall design allows easy access to base raceway of panel.
- Wing wall glide provides 2"(51mm) adjustment. With glide fully retracted the wing wall design allows the worksurface to be mounted at a 28-1/2"(724mm) height.
- Wing wall thickness is 3/4"(19mm). Does not add to length of panel run.
- Shipped unassembled.
- Available on RUSH.

To Order, Specify:

- Product number.
- Laminate color for wing wall.
- Trim color for edgeband.
- Trim color for hardware.


Specification Tips

- Wing wall must be mounted perpendicular to adjacent panels of equal or greater height.
- Full Height Two-Piece Wing Walls are aesthetically not recommended to be used as a return element at the end of a panel run. Because of the two piece wing wall design the worksurface edge detail between the lower and upper unit is visible from the workstation approach.
- Lower wing wall unit aligns with front edge of the worksurface.
- Lower edge of worksurface with cascade edge will not align with edge of lower wing wall.
- Upper structure components cannot be mounted directly onto wing wall.
- Full Height Two-Piece Wing Walls cannot be used between two adjacent panel mounted components, with the exception of worksurfaces.
- Finished installation height will be 1/4"(6mm) below the panel for a 48"(1219mm) high wing wall.
- When the Full Height Two-Piece Wing Wall is used with two back-to-back adjoining corner worksurfaces there is a visible gap between the front edge of the worksurfaces.
- Can be used with open base panels.
- See Specification Guide for planning and application guidelines.

Panel Complements

Wing Walls

Lower Unit



NSWL

Height	Width	Number	Laminate A Trim A	Trim B	Laminate B Trim A	Trim B
27 1/4" (692mm)	24"(610mm)	NSWL-2924	\$385.62	\$398.48	\$416.00	\$428.86
	30"(762mm)	NSWL-2930	427.69	440.55	458.07	470.93
	36"(914mm)	NSWL-2936	469.76	482.62	500.14	513.00
	42"(1067mm)	NSWL-2942	511.83	524.69	542.21	555.07
	48"(1219mm)	NSWL-2948	553.90	566.76	584.28	597.14

Features

- Includes laminate wing wall with 1mm edgeband, attachment hardware and one adjustable glide with carpet gripper. Attachment hardware includes:
 - Wing wall-to-panel attachment brackets, which connect into panel connector slots.
 - Lower wing wall-to-worksurface attachment brackets (two pair) with round fasteners, which support one side/end of up to two adjoining worksurfaces of equal depth. The L-brackets are non-handed and mount to the underside of a worksurface. Round fasteners standard in black finish.
 - Center mount hardware to mount lower wing wall centerline of panel connector, if required by product application. Standard in black finish.
- Lower unit provides support for one worksurface in a handed condition or two worksurfaces in a shared condition.
- No power or communications capability within wing wall. Wing wall design allows easy access to base raceway of panel.
- Lower unit provides same support as a comparably sized return panel.
- Lower unit may be installed in left-hand, right-hand, or shared conditions. No additional hardware required.
- Lower unit can be used in conjunction with the upper unit.
- Wing wall glide provides 2"(51mm) adjustment. With glide fully retracted the wing wall design allows the worksurface to be mounted at a 28 1/2"(724mm) height.
- Wing wall thickness is 3/4"(19mm). Does not add to length of panel run.
- Shipped unassembled.

To Order, Specify:

- Product number.
- Laminate color for wing wall.
- Trim color for edgeband.
- Trim color for hardware.


Specification Tips

- Wing wall must be mounted perpendicular to panels.
- When used with two back-to-back adjoining corner worksurfaces, a gap is created between the worksurfaces. Recommend using upper unit wing wall to bridge gap.
- Lower edge of worksurface with cascade edge will not align with edge of lower wing wall.
- Can be used with open base panels.
- See Specification Guide for planning and application guidelines.

Panel Complements

Wing Walls

Upper Unit



NSWU

Height	Width	Coordinating Panel Heights	Number	Laminate A Trim A	Laminate A Trim B	Laminate B Trim A	Laminate B Trim B
13"(330mm)	24"(610mm)	42"(1067mm)	NSWU-1324	\$337.71	\$350.57	\$391.46	\$404.32
	30"(762mm)		NSWU-1330	354.07	366.93	410.15	423.01
	36"(914mm)		NSWU-1336	370.43	383.29	428.84	441.70
	42"(1067mm)		NSWU-1342	386.79	399.65	447.53	460.39
	48"(1219mm)		NSWU-1348	403.15	416.01	466.22	479.08
19"(483mm)	24"(610mm)	48" (1219mm)	NSWU-1924	\$372.75	\$385.61	\$433.52	\$446.38
	30"(762mm)		NSWU-1930	389.11	401.97	452.21	465.07
	36"(914mm)		NSWU-1936	405.47	418.33	470.90	483.76
	42"(1067mm)		NSWU-1942	421.83	434.69	489.59	502.45
	48"(1219mm)		NSWU-1948	438.19	451.05	508.28	521.14
24"(610mm)	24"(610mm)	53" (1346mm)	NSWU-2424	\$401.95	\$414.81	\$468.57	\$481.43
	30"(762mm)		NSWU-2430	418.31	431.17	487.26	500.12
	36"(914mm)		NSWU-2436	434.67	447.53	505.95	518.81
	42"(1067mm)		NSWU-2442	451.03	463.89	524.64	537.50
	48"(1219mm)		NSWU-2448	467.39	480.25	543.33	556.19
35"(889mm)	24"(610mm)	64" (1626mm)	NSWU-3524	\$466.19	\$479.05	\$545.68	\$558.54
	30"(762mm)		NSWU-3530	482.55	495.41	564.37	577.23
	36"(914mm)		NSWU-3536	498.91	511.77	583.06	595.92
	42"(1067mm)		NSWU-3542	515.27	528.13	601.75	614.61
	48"(1219mm)		NSWU-3548	531.63	544.49	620.44	633.30

Features

- Includes laminate wing wall with 1mm edgeband and attachment hardware.
Attachment hardware includes:
 - Wing wall-to-panel attachment brackets, which connect into panel connector slots.
 - Upper wing wall-to-worksurface attachment brackets (one pair) which support front edge of wing wall. Brackets friction fit to the top of a worksurface.
 - Center mount hardware to mount upper wing wall centerline of panel connector, if required by product application. Standard in black finish.
- Upper unit provides visual privacy above the worksurface. Also defines space by creating boundaries.
- Upper unit may be installed in left-hand, right-hand, or shared conditions. No additional hardware required.
- Upper unit can be used in conjunction with the lower wing wall.
- Wing wall thickness is 3/4"(19mm). Does not add to length of panel run.
- Shipped unassembled.

To Order, Specify:


- Product number.
- Laminate color for wing wall.
- Trim color for edgeband.
- Trim color for hardware.

Specification Tips

- Worksurface depth must be equal to or greater than upper unit width.
- Finished installation height for a 19"(488mm) high wing wall will be 1/4"(6mm) below the top reveal of a 48"(1219mm) high panel.
- Upper structure components cannot be mounted directly onto wing wall.
- Upper unit wing walls cannot be used between two adjacent panel mounted components.
- See Specification Guide for planning and application guidelines.

Panel Complements

Wing Walls

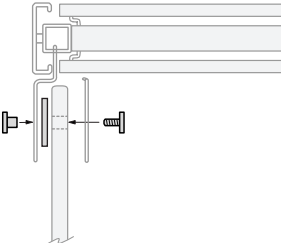		Number	Price
Center Mount Hardware		NSWH-2	\$17.53
	Features <ul style="list-style-type: none">• Includes three spacers and fasteners.• Allows wing walls to be centered on panel connector.• Standard in black finish.	To Order, Specify: 1) Product number. (No finish specification required.)	
	Specification Tips <ul style="list-style-type: none">• Center mount hardware must be separately specified for full height one-piece wing wall to mount centerline of panel connector.• Center mount hardware is provided with the full height two-piece, lower unit, and upper unit wing walls.		

Upper Structure Elements — Stack Kits

10" Stack Kit



NT-10

NOTES:

When specifying stack kits and super base panels with wood pads, an unmatched vertical wood grain and natural variations in wood grain and color can be expected between pads. If a consistent look is desired, specify Matching Wood Pad Sets.

18" (457mm) wide slat stack kits are not available.

Features

- Includes one non-handed cross bar and two pads with pad attachment brackets and accessories.
- No power or communications access; cables can be routed horizontally or vertically through the stack kit.
- Markerboard pads include removable tray.
- Pads are field-removable for access to internal cabling or for pad replacement.
- Stack kit may have the same fabric on both sides or a different fabric on each side.
- Stack kit thickness is 3" (76mm).
- Shipped unassembled.

■ Available on RUSH.

Specification Tips

- Maximum height of a panel configuration should not exceed 120" (3048mm).
- 10" (254mm) stack kits can only be specified for use at the top of a panel configuration.
- Connectors are required to create panel runs and intersections; specify separately.
- Stack kit to be used on the top of a foundation element or 16" (406mm) upper structure element.
- Top cap is provided with all foundation elements and is located to top of panel configurations.
- Slat pad is designed to work with Jump Stuff and Belong slat pad tools.
- See Specification Guide for slat pad application guidelines.
- Markers and erasers are not included.

To Order, Specify:

- 1) Product number.
- 2) Painted, fabric/colorway or wood finish for side one.*
- 3) Painted, fabric/colorway or wood finish for side two.*

***Note:** Upcharge for mixed grade fabric or trim surfaces, refer to the electronic catalog for pricing.

Upper Structure Elements — Stack Kits

10" Stack Kit

Height	Width	Side 1 Pad Surface	Side 2 Pad Surface	Number	Trim A	Trim B	Fabric A	Grade B	C	E	F	G
Same Surface Options												
10"(254mm)	18"(457mm)	Painted	Painted	NTPP-1018-NNN	\$ 265.26	\$272.28						
	24"(610mm)			NTPP-1024-NNN	288.62	297.98						
	30"(762mm)			NTPP-1030-NNN	311.98	323.68						
	36"(914mm)			NTPP-1036-NNN	335.34	349.38						
	42"(1067mm)			NTPP-1042-NNN	358.70	375.08						
	48"(1219mm)			NTPP-1048-NNN	382.06	400.78						
	60"(1524mm)			NTPP-1060-NNN	428.78	452.18						
10"(254mm)	18"(457mm)	Fabric/ Tackable	Fabric/ Tackable	NTFF-1018-NNN			\$237.22	\$258.26	\$262.94	\$272.28	\$283.96	\$295.64
	24"(610mm)			NTFF-1024-NNN			259.42	280.46	285.14	294.48	306.16	317.84
	30"(762mm)			NTFF-1030-NNN			281.62	302.66	307.34	316.68	328.36	340.04
	36"(914mm)			NTFF-1036-NNN			303.82	324.86	329.54	366.92	380.94	394.96
	42"(1067mm)			NTFF-1042-NNN			326.02	347.06	351.74	389.12	403.14	417.16
	48"(1219mm)			NTFF-1048-NNN			348.22	369.26	373.94	411.32	425.34	439.36
	60"(1524mm)			NTFF-1060-NNN			392.62	413.66	418.34	455.72	469.74	483.76
10"(254mm)	18"(457mm)	Fabric/Acous./ Tackable	Fabric/Acous./ Tackable	NTAA-1018-NNN			\$340.06	\$361.10	\$365.78	\$375.12	\$386.80	\$398.48
	24"(610mm)			NTAA-1024-NNN			371.60	392.64	397.32	406.66	418.34	430.02
	30"(762mm)			NTAA-1030-NNN			403.14	424.18	428.86	438.20	449.88	461.56
	36"(914mm)			NTAA-1036-NNN			434.68	455.72	460.40	497.78	511.80	525.82
	42"(1067mm)			NTAA-1042-NNN			466.22	487.26	491.94	529.32	543.34	557.36
	48"(1219mm)			NTAA-1048-NNN			497.76	518.80	523.48	560.86	574.88	588.90
	60"(1524mm)			NTAA-1060-NNN			560.84	581.88	586.56	623.94	637.96	651.98
10"(254mm)	24"(610mm)	Slat	Slat	NTYY-1024-NNN	\$ 551.58	\$560.94						
	30"(762mm)			NTYY-1030-NNN	587.82	599.52						
	36"(914mm)			NTYY-1036-NNN	624.06	638.10						
	42"(1067mm)			NTYY-1042-NNN	660.30	676.68						
	48"(1219mm)			NTYY-1048-NNN	696.54	715.26						
	60"(1524mm)			NTYY-1060-NNN	769.02	792.42						

Price												
10"(254mm)	18"(457mm)	Markerboard	Markerboard	NTMM-1018-NNN	\$ 721.00							
	24"(610mm)			NTMM-1024-NNN	763.06							
	30"(762mm)			NTMM-1030-NNN	805.12							
	36"(914mm)			NTMM-1036-NNN	847.18							
	42"(1067mm)			NTMM-1042-NNN	889.24							
	48"(1219mm)			NTMM-1048-NNN	931.30							
	60"(1524mm)			NTMM-1060-NNN	1015.42							

							Wood Group A	Wood Group B
10"(254mm)	18"(457mm)	Wood	Wood	NTWW-1018-NNN			\$491.96	\$515.32
	24"(610mm)			NTWW-1024-NNN			537.54	560.90
	30"(762mm)			NTWW-1030-NNN			583.12	606.48
	36"(914mm)			NTWW-1036-NNN			628.70	652.06
	42"(1067mm)			NTWW-1042-NNN			674.28	697.64
	48"(1219mm)			NTWW-1048-NNN			719.86	743.22
	60"(1524mm)			NTWW-1060-NNN			811.02	834.38













Upper Structure Elements — Stack Kits

10" Stack Kit

Height	Width	Side 1 Pad Surface	Side 2 Pad Surface	Number	Trim A Fabric Grade A	B	C	E	F	G
Mixed Surface Options										
10"(254mm)	18"(457mm)	Fabric/ Tackable	Painted	NTFP-1018-NNN	\$251.24	\$261.76	\$264.10	\$268.77	\$274.61	\$280.45
	24"(610mm)			NTFP-1024-NNN	274.02	284.54	286.88	291.55	297.39	303.23
	30"(762mm)			NTFP-1030-NNN	296.80	307.32	309.66	314.33	320.17	326.01
	36"(914mm)			NTFP-1036-NNN	319.58	330.10	332.44	351.13	358.14	365.15
	42"(1067mm)			NTFP-1042-NNN	342.36	352.88	355.22	373.91	380.92	387.93
	48"(1219mm)			NTFP-1048-NNN	365.14	375.66	378.00	396.69	403.70	410.71
	60"(1524mm)			NTFP-1060-NNN	410.70	421.22	423.56	442.25	449.26	456.27
10"(254mm)	18"(457mm)	Fabric/Acous./ Tackable	Painted	NTAP-1018-NNN	\$302.66	\$313.18	\$315.52	\$320.19	\$326.03	\$331.87
	24"(610mm)			NTAP-1024-NNN	330.11	340.63	342.97	347.64	353.48	359.32
	30"(762mm)			NTAP-1030-NNN	357.56	368.08	370.42	375.09	380.93	386.77
	36"(914mm)			NTAP-1036-NNN	385.01	395.53	397.87	416.56	423.57	430.58
	42"(1067mm)			NTAP-1042-NNN	412.46	422.98	425.32	444.01	451.02	458.03
	48"(1219mm)			NTAP-1048-NNN	439.91	450.43	452.77	471.46	478.47	485.48
	60"(1524mm)			NTAP-1060-NNN	494.81	505.33	507.67	526.36	533.37	540.38
10"(254mm)	24"(610mm)	Fabric/ Tackable	Slat	NTFY-1024-NNN ■	\$405.50	\$416.02	\$418.36	\$423.03	\$428.87	\$434.71
	30"(762mm)			NTFY-1030-NNN ■	434.72	445.24	447.58	452.25	458.09	463.93
	36"(914mm)			NTFY-1036-NNN ■	463.94	474.46	476.80	495.49	502.50	509.51
	42"(1067mm)			NTFY-1042-NNN ■	493.16	503.68	506.02	524.71	531.72	538.73
	48"(1219mm)			NTFY-1048-NNN ■	522.38	532.90	535.24	553.93	560.94	567.95
	60"(1524mm)			NTFY-1060-NNN ■	580.82	591.34	593.68	612.37	619.38	626.39
10"(254mm)	24"(610mm)	Fabric/Acous./ Tackable	Slat	NTAY-1024-NNN ■	\$461.59	\$472.11	\$474.45	\$479.12	\$484.96	\$490.80
	30"(762mm)			NTAY-1030-NNN ■	495.48	506.00	508.34	513.01	518.85	524.69
	36"(914mm)			NTAY-1036-NNN ■	529.37	539.89	542.23	560.92	567.93	574.94
	42"(1067mm)			NTAY-1042-NNN ■	563.26	573.78	576.12	594.81	601.82	608.83
	48"(1219mm)			NTAY-1048-NNN ■	597.15	607.67	610.01	628.70	635.71	642.72
	60"(1524mm)			NTAY-1060-NNN ■	664.93	675.45	677.79	696.48	703.49	710.50

Upper Structure Elements — Stack Kits

10" Stack Kit

Height	Width	Side 1 Pad Surface	Side 2 Pad Surface	Number	Trim B Fabric Grade		C	E	F	G
					A	B				
Mixed Surface Options										
10"(254mm)	18"(457mm)	Fabric/ Tackable	Painted	NTFP-1018-NNN	\$254.75	\$265.27	\$267.61	\$272.28	\$278.12	\$283.96
	24"(610mm)			NTFP-1024-NNN	278.70	289.22	291.56	296.23	302.07	307.91
	30"(762mm)			NTFP-1030-NNN	302.65	313.17	315.51	320.18	326.02	331.86
	36"(914mm)			NTFP-1036-NNN	326.60	337.12	339.46	358.15	365.16	372.17
	42"(1067mm)			NTFP-1042-NNN	350.55	361.07	363.41	382.10	389.11	396.12
	48"(1219mm)			NTFP-1048-NNN	374.50	385.02	387.36	406.05	413.06	420.07
	60"(1524mm)			NTFP-1060-NNN	422.40	432.92	435.26	453.95	460.96	467.97
10"(254mm)	18"(457mm)	Fabric/Acous./ Tackable	Painted	NTAP-1018-NNN	\$306.17	\$316.69	\$319.03	\$323.70	\$329.54	\$335.38
	24"(610mm)			NTAP-1024-NNN	334.79	345.31	347.65	352.32	358.16	364.00
	30"(762mm)			NTAP-1030-NNN	363.41	373.93	376.27	380.94	386.78	392.62
	36"(914mm)			NTAP-1036-NNN	392.03	402.55	404.89	423.58	430.59	437.60
	42"(1067mm)			NTAP-1042-NNN	420.65	431.17	433.51	452.20	459.21	466.22
	48"(1219mm)			NTAP-1048-NNN	449.27	459.79	462.13	480.82	487.83	494.84
	60"(1524mm)			NTAP-1060-NNN	506.51	517.03	519.37	538.06	545.07	552.08
10"(254mm)	24"(610mm)	Fabric/ Tackable	Slat	NTFY-1024-NNN 	\$410.18	\$420.70	\$423.04	\$427.71	\$433.55	\$439.39
	30"(762mm)			NTFY-1030-NNN 	440.57	451.09	453.43	458.10	463.94	469.78
	36"(914mm)			NTFY-1036-NNN 	470.96	481.48	483.82	502.51	509.52	516.53
	42"(1067mm)			NTFY-1042-NNN 	501.35	511.87	514.21	532.90	539.91	546.92
	48"(1219mm)			NTFY-1048-NNN 	531.74	542.26	544.60	563.29	570.30	577.31
	60"(1524mm)			NTFY-1060-NNN 	592.52	603.04	605.38	624.07	631.08	638.09
10"(254mm)	24"(610mm)	Fabric/Acous./ Tackable	Slat	NTAY-1024-NNN 	\$466.27	\$476.79	\$479.13	\$483.80	\$489.64	\$495.48
	30"(762mm)			NTAY-1030-NNN 	501.33	511.85	514.19	518.86	524.70	530.54
	36"(914mm)			NTAY-1036-NNN 	536.39	546.91	549.25	567.94	574.95	581.96
	42"(1067mm)			NTAY-1042-NNN 	571.45	581.97	584.31	603.00	610.01	617.02
	48"(1219mm)			NTAY-1048-NNN 	606.51	617.03	619.37	638.06	645.07	652.08
	60"(1524mm)			NTAY-1060-NNN 	676.63	687.15	689.49	708.18	715.19	722.20

Upper Structure Elements — Stack Kits

10" Stack Kit

Height	Width	Side 1 Pad Surface	Side 2 Pad Surface	Number	Fabric Grade		C	E	F	G
					A	B				
10"(254mm)	18"(457mm)	Fabric/Acous./ Tackable	Fabric/ Tackable	NTAF-1018-NNN	\$288.64	\$309.68	\$314.36	\$323.70	\$335.38	\$347.06
	24"(610mm)			NTAF-1024-NNN	315.51	336.55	341.23	350.57	362.25	373.93
	30"(762mm)			NTAF-1030-NNN	342.38	363.42	368.10	377.44	389.12	400.80
	36"(914mm)			NTAF-1036-NNN	369.25	390.29	394.97	432.35	446.37	460.39
	42"(1067mm)			NTAF-1042-NNN	396.12	417.16	421.84	459.22	473.24	487.26
	48"(1219mm)			NTAF-1048-NNN	422.99	444.03	448.71	486.09	500.11	514.13
	60"(1524mm)			NTAF-1060-NNN	476.73	497.77	502.45	539.83	553.85	567.87
10"(254mm)	18"(457mm)	Fabric/ Tackable	Markerboard	NTFM-1018-NNN	\$479.11	\$489.63	\$491.97	\$496.64	\$502.48	\$508.32
	24"(610mm)			NTFM-1024-NNN	511.24	521.76	524.10	528.77	534.61	540.45
	30"(762mm)			NTFM-1030-NNN	543.37	553.89	556.23	560.90	566.74	572.58
	36"(914mm)			NTFM-1036-NNN	575.50	586.02	588.36	607.05	614.06	621.07
	42"(1067mm)			NTFM-1042-NNN	607.63	618.15	620.49	639.18	646.19	653.20
	48"(1219mm)			NTFM-1048-NNN	639.76	650.28	652.62	671.31	678.32	685.33
	60"(1524mm)			NTFM-1060-NNN	704.02	714.54	716.88	735.57	742.58	749.59
10"(254mm)	18"(457mm)	Fabric/Acous./ Tackable	Markerboard	NTAM-1018-NNN	\$530.53	\$541.05	\$543.39	\$548.06	\$553.90	\$559.74
	24"(610mm)			NTAM-1024-NNN	567.33	577.85	580.19	584.86	590.70	596.54
	30"(762mm)			NTAM-1030-NNN	604.13	614.65	616.99	621.66	627.50	633.34
	36"(914mm)			NTAM-1036-NNN	640.93	651.45	653.79	672.48	679.49	686.50
	42"(1067mm)			NTAM-1042-NNN	677.73	688.25	690.59	709.28	716.29	723.30
	48"(1219mm)			NTAM-1048-NNN	714.53	725.05	727.39	746.08	753.09	760.10
	60"(1524mm)			NTAM-1060-NNN	788.13	798.65	800.99	819.68	826.69	833.70

Upper Structure Elements — Stack Kits

10" Stack Kit


Height	Width	Side 1 Pad Surface	Side 2 Pad Surface	Number	Fabric Grade		C	E	F	G
Wood Group A										
10"(254mm)	18"(457mm)	Fabric/ Tackable	Wood	NTFW-1018-NNN	\$364.59	\$375.11	\$377.45	\$382.12	\$387.96	\$393.80
	24"(610mm)			NTFW-1024-NNN	398.48	409.00	411.34	416.01	421.85	427.69
	30"(762mm)			NTFW-1030-NNN	432.37	442.89	445.23	449.90	455.74	461.58
	36"(914mm)			NTFW-1036-NNN	466.26	476.78	479.12	497.81	504.82	511.83
	42"(1067mm)			NTFW-1042-NNN	500.15	510.67	513.01	531.70	538.71	545.72
	48"(1219mm)			NTFW-1048-NNN	534.04	544.56	546.90	565.59	572.60	579.61
	60"(1524mm)			NTFW-1060-NNN	601.82	612.34	614.68	633.37	640.38	647.39
Wood Group B										
10"(254mm)	18"(457mm)	Fabric/ Tackable	Wood	NTFW-1018-NNN	\$376.27	\$386.79	\$389.13	\$393.80	\$399.64	\$405.48
	24"(610mm)			NTFW-1024-NNN	410.16	420.68	423.02	427.69	433.53	439.37
	30"(762mm)			NTFW-1030-NNN	444.05	454.57	456.91	461.58	467.42	473.26
	36"(914mm)			NTFW-1036-NNN	477.94	488.46	490.80	509.49	516.50	523.51
	42"(1067mm)			NTFW-1042-NNN	511.83	522.35	524.69	543.38	550.39	557.40
	48"(1219mm)			NTFW-1048-NNN	545.72	556.24	558.58	577.27	584.28	591.29
	60"(1524mm)			NTFW-1060-NNN	613.50	624.02	626.36	645.05	652.06	659.07
Wood Group A										
10"(254mm)	18"(457mm)	Fabric/Acous./ Tackable	Wood	NTAW-1018-NNN	\$416.01	\$426.53	\$428.87	\$433.54	\$439.38	\$445.22
	24"(610mm)			NTAW-1024-NNN	454.57	465.09	467.43	472.10	477.94	483.78
	30"(762mm)			NTAW-1030-NNN	493.13	503.65	505.99	510.66	516.50	522.34
	36"(914mm)			NTAW-1036-NNN	531.69	542.21	544.55	563.24	570.25	577.26
	42"(1067mm)			NTAW-1042-NNN	570.25	580.77	583.11	601.80	608.81	615.82
	48"(1219mm)			NTAW-1048-NNN	608.81	619.33	621.67	640.36	647.37	654.38
	60"(1524mm)			NTAW-1060-NNN	685.93	696.45	698.79	717.48	724.49	731.50
Wood Group B										
10"(254mm)	18"(457mm)	Fabric/Acous./ Tackable	Wood	NTAW-1018-NNN	\$427.69	\$438.21	\$440.55	\$445.22	\$451.06	\$456.90
	24"(610mm)			NTAW-1024-NNN	466.25	476.77	479.11	483.78	489.62	495.46
	30"(762mm)			NTAW-1030-NNN	504.81	515.33	517.67	522.34	528.18	534.02
	36"(914mm)			NTAW-1036-NNN	543.37	553.89	556.23	574.92	581.93	588.94
	42"(1067mm)			NTAW-1042-NNN	581.93	592.45	594.79	613.48	620.49	627.50
	48"(1219mm)			NTAW-1048-NNN	620.49	631.01	633.35	652.04	659.05	666.06
	60"(1524mm)			NTAW-1060-NNN	697.61	708.13	710.47	729.16	736.17	743.18

Upper Structure Elements — Stack Kits

10" Stack Kit

Height	Width	Number	White Trim A	Trim B	Patterned Trim A	Trim B
10"(254mm)	24"(610mm)	NTXX-1024-NNN	\$580.80	\$587.82	\$ 707.00	\$ 714.02
	30"(762mm)	NTXX-1030-NNN	636.90	643.92	775.36	784.72
	36"(914mm)	NTXX-1036-NNN	693.00	700.02	843.72	855.42
	42"(1067mm)	NTXX-1042-NNN	749.10	756.12	912.08	926.12
	48"(1219mm)	NTXX-1048-NNN	805.20	812.22	980.44	996.82
	60"(1524mm)	NTXX-1060-NNN	917.40	924.42	1117.16	1138.22

10" Translucent Stack Kit



NTXX

Features

- Includes one cross bar with pad attachment brackets, and two outer frames with translucent material.
- No power or communications access.
- Translucent thickness is 1/8"(3mm).
- Assembled stack kit thickness is 3"(76mm).
- Frames may be removed for cleaning.
- Shipped unassembled.

Specification Tips

- Maximum height of a panel configuration should not exceed 120"(3048mm).
- 10"(254mm) stack kits can only be specified for use at the top of a panel configuration.
- Connectors are required to create panel runs and intersections; specify separately.
- Stack kit to be used on the top of a foundation element or 16"(406mm) upper structure element.
- Top cap is provided with all foundation elements and is relocated to top of panel configurations.
- Due to the aesthetic properties of the translucent surface material, it is not recommended to route cables behind pads.


To Order, Specify:

- 1) Product number.
- 2) Translucent color/pattern for side one.
- 3) Trim color for frame for side one.*
- 4) Translucent color/pattern for side two.
- 5) Trim color for frame for side two.*

***Note:** Upcharge for mixed grade trim surfaces, refer to the electronic catalog for pricing.

Upper Structure Elements — Stack Kits

16" Stack Kit



NT-16

NOTES:
When specifying stack kits and super base panels with wood pads, an unmatched vertical wood grain and natural variations in wood grain and color can be expected between pads. If a consistent look is desired, specify Matching Wood Pad Sets.
18" (457mm) wide perforated or slat stack kits are not available.

Features

- Includes one non-handed cross bar and two pads with pad attachment brackets and accessories.
 - No power or communications access; cables can be routed horizontally or vertically through the stack kit.
 - Markerboard pads include removable tray.
 - Pads are field-removable for access to internal cabling or for pad replacement.
 - Stack kit may have the same fabric on both sides or a different fabric on each side.
 - Stack kit thickness is 3"(76mm).
 - Shipped unassembled.
- ◆ Available on RUSH.

Specification Tips

- Maximum height of a panel configuration should not exceed 120"(3048mm).
- Connectors are required to create panel runs and intersection; specify separately.
- Stack kit to be used on the top of a foundation element or 16"(406mm) upper structure element.
- Top cap is provided with all foundation elements and is located to top of panel configurations.
- Due to the aesthetic properties of the perforated surface material, it is not recommended to route cables behind pads.
- Slat pad is designed to work with Jump Stuff and Belong slat pad tools.
- See Specification Guide for slat pad application guidelines.
- Markers and erasers are not included.

To Order, Specify:

- 1) Product number.
- 2) Painted or fabric/colorway for side one.*
- 3) Painted or fabric/colorway for side two.*

***Note:** Upcharge for mixed grade fabric or trim surfaces, refer to the electronic catalog for pricing.

Upper Structure Elements — Stack Kits

16" Stack Kit

Height	Width	Side 1 Pad Surface	Side 2 Pad Surface	Number	Trim A	Trim B	Fabric Grade A	B	C	E	F	G
Same Surface Options												
16"(406mm)	18"(457mm)	Painted	Painted	NTPP-1618-NNN	\$ 293.30	\$305.00						
	24"(610mm)			NTPP-1624-NNN	319.58	333.62						
	30"(762mm)			NTPP-1630-NNN	345.86	362.24						
	36"(914mm)			NTPP-1636-NNN	372.14	390.86						
	42"(1067mm)			NTPP-1642-NNN	398.42	419.48						
	48"(1219mm)			NTPP-1648-NNN	424.70	448.10						
	60"(1524mm)			NTPP-1660-NNN	477.26	505.34						
16"(406mm)	18"(457mm)	Fabric/ Tackable	Fabric/ Tackable	NTFF-1618-NNN			\$281.62	\$307.34	\$314.34	\$330.70	\$347.06	\$363.40
	24"(610mm)			NTFF-1624-NNN	306.74	332.46	339.46	355.82	372.18	388.52		
	30"(762mm)			NTFF-1630-NNN	331.86	357.58	364.58	380.94	397.30	413.64		
	36"(914mm)			NTFF-1636-NNN	356.98	382.70	389.70	437.61	456.31	476.15		
	42"(1067mm)			NTFF-1642-NNN	382.10	407.82	414.82	462.73	481.43	501.27		
	48"(1219mm)			NTFF-1648-NNN	407.22	432.94	439.94	487.85	506.55	526.39		
	60"(1524mm)			NTFF-1660-NNN	457.46	483.18	490.18	538.09	556.79	576.63		
16"(406mm)	18"(457mm)	Fabric/Acous./ Tackable	Fabric/Acous./ Tackable	NTAA-1618-NNN			\$384.46	\$410.18	\$417.18	\$433.54	\$449.90	\$466.24
	24"(610mm)			NTAA-1624-NNN	418.92	444.64	451.64	468.00	484.36	500.70		
	30"(762mm)			NTAA-1630-NNN	453.38	479.10	486.10	502.46	518.82	535.16		
	36"(914mm)			NTAA-1636-NNN	487.84	513.56	520.56	568.47	587.17	607.01		
	42"(1067mm)			NTAA-1642-NNN	522.30	548.02	555.02	602.93	621.63	641.47		
	48"(1219mm)			NTAA-1648-NNN	556.76	582.48	589.48	637.39	656.09	675.93		
	60"(1524mm)			NTAA-1660-NNN	625.68	651.40	658.40	706.31	725.01	744.85		
16"(406mm)	24"(610mm)	Perforated	Perforated	NTHH-1624-NNN	\$ 539.32	\$553.36						
	30"(762mm)			NTHH-1630-NNN	589.00	605.38						
	36"(914mm)			NTHH-1636-NNN	638.68	657.40						
	42"(1067mm)			NTHH-1642-NNN	688.36	709.42						
	48"(1219mm)			NTHH-1648-NNN	738.04	761.44						
	60"(1524mm)			NTHH-1660-NNN	837.40	865.48						
16"(406mm)	24"(610mm)	Slat	Slat	NTYY-1624-NNN	\$ 601.32	\$615.36						
	30"(762mm)			NTYY-1630-NNN	640.58	656.96						
	36"(914mm)			NTYY-1636-NNN	679.84	698.56						
	42"(1067mm)			NTYY-1642-NNN	719.10	740.16						
	48"(1219mm)			NTYY-1648-NNN	758.36	781.76						
	60"(1524mm)			NTYY-1660-NNN	836.88	864.96						
Price												
16"(406mm)	18"(457mm)	Markerboard	Markerboard	NTMM-1618-NNN	\$ 760.72							
	24"(610mm)			NTMM-1624-NNN	803.94							
	30"(762mm)			NTMM-1630-NNN	847.16							
	36"(914mm)			NTMM-1636-NNN	890.38							
	42"(1067mm)			NTMM-1642-NNN	933.60							
	48"(1219mm)			NTMM-1648-NNN	976.82							
	60"(1524mm)			NTMM-1660-NNN	1063.26							
Wood Group A Wood Group B												
16"(406mm)	18"(457mm)	Wood	Wood	NTWW-1618-NNN	\$ 583.12	\$618.18						
	24"(610mm)			NTWW-1624-NNN	636.88	671.94						
	30"(762mm)			NTWW-1630-NNN	690.64	725.70						
	36"(914mm)			NTWW-1636-NNN	744.40	779.46						
	42"(1067mm)			NTWW-1642-NNN	798.16	833.22						
	48"(1219mm)			NTWW-1648-NNN	851.92	886.98						
	60"(1524mm)			NTWW-1660-NNN	959.44	994.50						

Upper Structure Elements — Stack Kits

16" Stack Kit

		Side 1 Pad Surface	Side 2 Pad Surface		Trim A Fabric	Grade B	C	E	F	G
Height	Width			Number	A					
Mixed Surface Options										
16"(406mm)	18"(457mm)	Fabric/ Tackable	Painted	NTFP-1618-NNN	\$284.54	\$297.40	\$300.90	\$309.08	\$317.26	\$325.43
	24"(610mm)			NTFP-1624-NNN	310.24	323.10	326.60	334.78	342.96	351.13
	30"(762mm)			NTFP-1630-NNN	335.94	348.80	352.30	360.48	368.66	376.83
	36"(914mm)			NTFP-1636-NNN	361.64	374.50	378.00	400.20	409.55	418.89
	42"(1067mm)			NTFP-1642-NNN	387.34	400.20	403.70	425.90	435.25	444.59
	48"(1219mm)			NTFP-1648-NNN	413.04	425.90	429.40	451.60	460.95	470.29
	60"(1524mm)			NTFP-1660-NNN	464.44	477.30	480.80	503.00	512.35	521.69
16"(406mm)	18"(457mm)	Fabric/Acous./ Tackable	Painted	NTAP-1618-NNN	\$335.96	\$348.82	\$352.32	\$360.50	\$368.68	\$376.85
	24"(610mm)			NTAP-1624-NNN	366.33	379.19	382.69	390.87	399.05	407.22
	30"(762mm)			NTAP-1630-NNN	396.70	409.56	413.06	421.24	429.42	437.59
	36"(914mm)			NTAP-1636-NNN	427.07	439.93	443.43	465.63	474.98	484.32
	42"(1067mm)			NTAP-1642-NNN	457.44	470.30	473.80	496.00	505.35	514.69
	48"(1219mm)			NTAP-1648-NNN	487.81	500.67	504.17	526.37	535.72	545.06
	60"(1524mm)			NTAP-1660-NNN	548.55	561.41	564.91	587.11	596.46	605.80
16"(406mm)	24"(610mm)	Fabric/Tackable	Slat	NTFY-1624-NNN	\$441.77	\$454.63	\$458.13	\$466.31	\$474.49	\$482.66
	30"(762mm)			NTFY-1630-NNN	473.96	486.82	490.32	498.50	506.68	514.85
	36"(914mm)			NTFY-1636-NNN	506.15	519.01	522.51	544.71	554.06	563.40
	42"(1067mm)			NTFY-1642-NNN	538.34	551.20	554.70	576.90	586.25	595.59
	48"(1219mm)			NTFY-1648-NNN	570.53	583.39	586.89	609.09	618.44	627.78
	60"(1524mm)			NTFY-1660-NNN	634.91	647.77	651.27	673.47	682.82	692.16
16"(406mm)	24"(610mm)	Fabric/Acous./ Tackable	Slat	NTAY-1624-NNN	\$497.86	\$510.72	\$514.22	\$522.40	\$530.58	\$538.75
	30"(762mm)			NTAY-1630-NNN	534.72	547.58	551.08	559.26	567.44	575.61
	36"(914mm)			NTAY-1636-NNN	571.58	584.44	587.94	610.14	619.49	628.83
	42"(1067mm)			NTAY-1642-NNN	608.44	621.30	624.80	647.00	656.35	665.69
	48"(1219mm)			NTAY-1648-NNN	645.30	658.16	661.66	683.86	693.21	702.55
	60"(1524mm)			NTAY-1660-NNN	719.02	731.88	735.38	757.58	766.93	776.27

Upper Structure Elements — Stack Kits

16" Stack Kit

Height	Width	Side 1 Pad Surface	Side 2 Pad Surface	Number	Trim B Fabric Grade A	B	C	E	F	G
Mixed Surface Options										
16"(406mm)	18"(457mm)	Fabric/ Tackable	Painted	NTFP-1618-NNN	\$290.39	\$303.25	\$306.75	\$314.93	\$323.11	\$331.28
	24"(610mm)			NTFP-1624-NNN	317.26	330.12	333.62	341.80	349.98	358.15
	30"(762mm)			NTFP-1630-NNN	344.13	356.99	360.49	368.67	376.85	385.02
	36"(914mm)			NTFP-1636-NNN	371.00	383.86	387.36	409.56	418.91	428.25
	42"(1067mm)			NTFP-1642-NNN	397.87	410.73	414.23	436.43	445.78	455.12
	48"(1219mm)			NTFP-1648-NNN	424.74	437.60	441.10	463.30	472.65	481.99
	60"(1524mm)			NTFP-1660-NNN	478.48	491.34	494.84	517.04	526.39	535.73
16"(406mm)	18"(457mm)	Fabric/Acous./ Tackable	Painted	NTAP-1618-NNN	\$341.81	\$354.67	\$358.17	\$366.35	\$374.53	\$382.70
	24"(610mm)			NTAP-1624-NNN	373.35	386.21	389.71	397.89	406.07	414.24
	30"(762mm)			NTAP-1630-NNN	404.89	417.75	421.25	429.43	437.61	445.78
	36"(914mm)			NTAP-1636-NNN	436.43	449.29	452.79	474.99	484.34	493.68
	42"(1067mm)			NTAP-1642-NNN	467.97	480.83	484.33	506.53	515.88	525.22
	48"(1219mm)			NTAP-1648-NNN	499.51	512.37	515.87	538.07	547.42	556.76
	60"(1524mm)			NTAP-1660-NNN	562.59	575.45	578.95	601.15	610.50	619.84
16"(406mm)	24"(610mm)	Fabric/Tackable	Slat	NTFY-1624-NNN	\$448.79	\$461.65	\$465.15	\$473.33	\$481.51	\$489.68
	30"(762mm)			NTFY-1630-NNN	482.15	495.01	498.51	506.69	514.87	523.04
	36"(914mm)			NTFY-1636-NNN	515.51	528.37	531.87	554.07	563.42	572.76
	42"(1067mm)			NTFY-1642-NNN	548.87	561.73	565.23	587.43	596.78	606.12
	48"(1219mm)			NTFY-1648-NNN	582.23	595.09	598.59	620.79	630.14	639.48
	60"(1524mm)			NTFY-1660-NNN	648.95	661.81	665.31	687.51	696.86	706.20
16"(406mm)	24"(610mm)	Fabric/Acous./ Tackable	Slat	NTAY-1624-NNN	\$504.88	\$517.74	\$521.24	\$529.42	\$537.60	\$545.77
	30"(762mm)			NTAY-1630-NNN	542.91	555.77	559.27	567.45	575.63	583.80
	36"(914mm)			NTAY-1636-NNN	580.94	593.80	597.30	619.50	628.85	638.19
	42"(1067mm)			NTAY-1642-NNN	618.97	631.83	635.33	657.53	666.88	676.22
	48"(1219mm)			NTAY-1648-NNN	657.00	669.86	673.36	695.56	704.91	714.25
	60"(1524mm)			NTAY-1660-NNN	733.06	745.92	749.42	771.62	780.97	790.31

Upper Structure Elements — Stack Kits

16" Stack Kit

Height	Width	Side 1 Pad Surface	Side 2 Pad Surface	Number	Fabric Grade		C	E	F	G
16"(406mm)	18"(457mm)	Fabric/Acous./ Tackable	Fabric/ Tackable	NTAF-1618-NNN	\$333.04	\$358.76	\$365.76	\$382.12	\$398.48	\$414.82
	24"(610mm)			NTAF-1624-NNN	362.83	388.55	395.55	411.91	428.27	444.61
	30"(762mm)			NTAF-1630-NNN	392.62	418.34	425.34	441.70	458.06	474.40
	36"(914mm)			NTAF-1636-NNN	422.41	448.13	455.13	503.04	521.74	541.58
	42"(1067mm)			NTAF-1642-NNN	452.20	477.92	484.92	532.83	551.53	571.37
	48"(1219mm)			NTAF-1648-NNN	481.99	507.71	514.71	562.62	581.32	601.16
	60"(1524mm)			NTAF-1660-NNN	541.57	567.29	574.29	622.20	640.90	660.74
16"(406mm)	18"(457mm)	Fabric/Tackable	Markerboard	NTFM-1618-NNN	\$512.41	\$525.27	\$528.77	\$536.95	\$545.13	\$553.30
	24"(610mm)			NTFM-1624-NNN	546.58	559.44	562.94	571.12	579.30	587.47
	30"(762mm)			NTFM-1630-NNN	580.75	593.61	597.11	605.29	613.47	621.64
	36"(914mm)			NTFM-1636-NNN	614.92	627.78	631.28	653.48	662.83	672.17
	42"(1067mm)			NTFM-1642-NNN	649.09	661.95	665.45	687.65	697.00	706.34
	48"(1219mm)			NTFM-1648-NNN	683.26	696.12	699.62	721.82	731.17	740.51
	60"(1524mm)			NTFM-1660-NNN	751.60	764.46	767.96	790.16	799.51	808.85
16"(406mm)	18"(457mm)	Fabric/Acous./ Tackable	Markerboard	NTAM-1618-NNN	\$563.83	\$576.69	\$580.19	\$588.37	\$596.55	\$604.72
	24"(610mm)			NTAM-1624-NNN	602.67	615.53	619.03	627.21	635.39	643.56
	30"(762mm)			NTAM-1630-NNN	641.51	654.37	657.87	666.05	674.23	682.40
	36"(914mm)			NTAM-1636-NNN	680.35	693.21	696.71	718.91	728.26	737.60
	42"(1067mm)			NTAM-1642-NNN	719.19	732.05	735.55	757.75	767.10	776.44
	48"(1219mm)			NTAM-1648-NNN	758.03	770.89	774.39	796.59	805.94	815.28
	60"(1524mm)			NTAM-1660-NNN	835.71	848.57	852.07	874.27	883.62	892.96


Upper Structure Elements — Stack Kits

16" Stack Kit

Height	Width	Side 1 Pad Surface	Side 2 Pad Surface	Number	Fabric Grade A	B	C	E	F	G
Wood Group A										
16"(406mm)	18"(457mm)	Fabric/Tackable	Wood	NTFW-1618-NNN	\$397.89	\$410.75	\$414.25	\$422.43	\$430.61	\$438.78
	24"(610mm)			NTFW-1624-NNN	437.33	450.19	453.69	461.87	470.05	478.22
	30"(762mm)			NTFW-1630-NNN	476.77	489.63	493.13	501.31	509.49	517.66
	36"(914mm)			NTFW-1636-NNN	516.21	529.07	532.57	554.77	564.12	573.46
	42"(1067mm)			NTFW-1642-NNN	555.65	568.51	572.01	594.21	603.56	612.90
	48"(1219mm)			NTFW-1648-NNN	595.09	607.95	611.45	633.65	643.00	652.34
	60"(1524mm)			NTFW-1660-NNN	673.97	686.83	690.33	712.53	721.88	731.22
Wood Group B										
16"(406mm)	18"(457mm)	Fabric/Tackable	Wood	NTFW-1618-NNN	\$415.42	\$428.28	\$431.78	\$439.96	\$448.14	\$456.31
	24"(610mm)			NTFW-1624-NNN	454.86	467.72	471.22	479.40	487.58	495.75
	30"(762mm)			NTFW-1630-NNN	494.30	507.16	510.66	518.84	527.02	535.19
	36"(914mm)			NTFW-1636-NNN	533.74	546.60	550.10	572.30	581.65	590.99
	42"(1067mm)			NTFW-1642-NNN	573.18	586.04	589.54	611.74	621.09	630.43
	48"(1219mm)			NTFW-1648-NNN	612.62	625.48	628.98	651.18	660.53	669.87
	60"(1524mm)			NTFW-1660-NNN	691.50	704.36	707.86	730.06	739.41	748.75
Wood Group A										
16"(406mm)	18"(457mm)	Fabric/Acous./ Tackable	Wood	NTAW-1618-NNN	\$449.31	\$462.17	\$465.67	\$473.85	\$482.03	\$490.20
	24"(610mm)			NTAW-1624-NNN	493.42	506.28	509.78	517.96	526.14	534.31
	30"(762mm)			NTAW-1630-NNN	537.53	550.39	553.89	562.07	570.25	578.42
	36"(914mm)			NTAW-1636-NNN	581.64	594.50	598.00	620.20	629.55	638.89
	42"(1067mm)			NTAW-1642-NNN	625.75	638.61	642.11	664.31	673.66	683.00
	48"(1219mm)			NTAW-1648-NNN	669.86	682.72	686.22	708.42	717.77	727.11
	60"(1524mm)			NTAW-1660-NNN	758.08	770.94	774.44	796.64	805.99	815.33
Wood Group B										
16"(406mm)	18"(457mm)	Fabric/Acous./ Tackable	Wood	NTAW-1618-NNN	\$466.84	\$479.70	\$483.20	\$491.38	\$499.56	\$507.73
	24"(610mm)			NTAW-1624-NNN	510.95	523.81	527.31	535.49	543.67	551.84
	30"(762mm)			NTAW-1630-NNN	555.06	567.92	571.42	579.60	587.78	595.95
	36"(914mm)			NTAW-1636-NNN	599.17	612.03	615.53	637.73	647.08	656.42
	42"(1067mm)			NTAW-1642-NNN	643.28	656.14	659.64	681.84	691.19	700.53
	48"(1219mm)			NTAW-1648-NNN	687.39	700.25	703.75	725.95	735.30	744.64
	60"(1524mm)			NTAW-1660-NNN	775.61	788.47	791.97	814.17	823.52	832.86

Upper Structure Elements — Stack Kits

16" Stack Kit



NTXX

	Height	Width	Number	White Trim A	Trim B	Patterned Trim A	Trim B
16" Translucent Stack Kit	16"(406mm)	24"(610mm)	NTXX-1624-NNN	\$618.18	\$629.88	\$ 751.40	\$ 763.10
		30"(762mm)	NTXX-1630-NNN	678.94	690.64	824.42	838.46
		36"(914mm)	NTXX-1636-NNN	739.70	751.40	897.44	913.82
		42"(1067mm)	NTXX-1642-NNN	800.46	812.16	970.46	989.18
		48"(1219mm)	NTXX-1648-NNN	861.22	872.92	1043.48	1064.54
		60"(1524mm)	NTXX-1660-NNN	982.74	994.44	1189.52	1215.26

Features

- Includes one cross bar with pad attachment brackets, and two outer frames with translucent material.
- No power or communications access.
- Translucent thickness is 1/8"(3mm).
- Assembled stack kit thickness is 3"(76mm).
- Frames may be removed for cleaning.
- Shipped unassembled.

Specification Tips

- Maximum height of a panel configuration should not exceed 120"(3048mm).
- Connectors are required to create panel runs and intersections; specify separately.
- Stack kit to be used on the top of a foundation element or 16"(406mm) upper structure element.
- Top cap is provided with all foundation elements and is relocated to top of panel configurations.
- Due to the aesthetic properties of the translucent surface material, it is not recommended to route cables behind pads.

To Order, Specify:


- 1) Product number.
- 2) Translucent color/pattern for side one.
- 3) Trim color for frame for side one.*
- 4) Translucent color/pattern for side two.
- 5) Trim color for frame for side two.*

***Note:** Upcharge for mixed grade translucent or trim surfaces, refer to the electronic catalog for pricing.

Upper Structure Elements — Stack Kits

16" Glazed Stack Kits

16" Single Pane Glazed Stack Kit



NTGS

Height	Width	Number	Glass		C	D	Trim A	Trim B
			A	Trim B				
16"(406mm)	18"(457mm)	NTGS-1618	\$420.10	\$437.46	\$ 657.35	\$ 674.71	\$ 777.71	\$ 795.07
	24"(610mm)	NTGS-1624	454.82	474.49	715.22	734.89	848.31	867.98
	30"(762mm)	NTGS-1630	489.54	511.52	773.09	795.07	918.91	940.89
	36"(914mm)	NTGS-1636	524.26	548.55	830.96	855.25	989.51	1013.80
	42"(1067mm)	NTGS-1642	558.98	585.58	888.83	915.43	1060.11	1086.71
	48"(1219mm)	NTGS-1648	593.70	622.61	946.70	975.61	1130.71	1159.62
	60"(1524mm)	NTGS-1660	663.14	696.67	1062.44	1095.97	1271.91	1305.44


Features

- Includes one non-handed cross bar with pad attachment brackets, one aluminum pad attachment bracket, two outer frames, with one glazed pane in center.
- No power or communications access.
- Glazing material thickness for Clear is 1/8"(3mm).
- Glazing material thickness for English Reeded, and Patterned is .16"(4mm).
- Assembled stack kit thickness is 3"(76mm).
- Glazing material for English Reeded, and Patterned is textured on one side only.
- Shipped unassembled.

To Order, Specify:

- Product number.
- Glazing finish.
Grade A:
1C = Clear glass
Grade C:
ER21 = Satin Etch
Grade D:
1E = Frosted (M)
VM = Patterned glass
CM = Patterned glass
- Trim color for frame.

16" Double Pane Glazed Stack Kit



NTGG

Height	Width	Number	Glass		D	Trim A	Trim B
			A	Trim B			
16"(406mm)	18"(457mm)	NTGG-1618	\$462.92	\$480.28	\$820.53	(M)	\$837.89 (M)
	24"(610mm)	NTGG-1624	497.64	517.31	891.13	(M)	910.80 (M)
	30"(762mm)	NTGG-1630	532.36	554.34	961.73	(M)	983.71 (M)
	36"(914mm)	NTGG-1636	567.08	591.37	1032.33	(M)	1056.62 (M)
	42"(1067mm)	NTGG-1642	601.80	628.40	1102.93	(M)	1129.53 (M)
	48"(1219mm)	NTGG-1648	636.52	665.43	1173.53	(M)	1202.44 (M)
	60"(1524mm)	NTGG-1660	758.04	791.57	1366.81	(M)	1400.34 (M)

Features

- Includes one non-handed cross bar with pad attachment brackets, and two outer frames with glazing material.
- No power or communications access.
- Glazing material thickness is 1/8"(3mm). Not available in patterned glass.
- Assembled stack kit thickness is 3"(76mm).
- Frames may be removed for cleaning.
- Shipped unassembled.
- Available on RUSH.

To Order, Specify:

- Product number.
- Glazing finish.
Grade A:
1C = Clear glass
Grade D:
1E = Frosted
- Trim color for frame.

Single and Double Pane Specification Tips

- Maximum height of a panel configuration is 120"(3048mm).
- Connectors are required to create panel runs and conditions; specify separately.
- Stack kit to be used on the top of a foundation element or 16"(406mm) upper structure element.
- Top cap is provided with all foundation elements and is relocated to top of panel configuration.
- One of the Single Pane plastic pad attachment brackets on the cross bar must be replaced with an aluminum attachment bracket.
- Single pane is not available in floor-to-ceiling (FTC) pad sets.

(M) Product marked with this symbol available as GSA open market.


Opening/Glazing Area

Stack Kit Size	Open Height	Open Width
1618	11.1"(282mm)	14.7"(373mm)
1624		20.7"(526mm)
1630		26.7"(678mm)
1636		32.7"(831mm)
1642		38.7"(983mm)
1648		44.7"(1135mm)
1660		56.7"(1440mm)


Upper Structure Elements — Stack Kits

16" Open Stack Kits

	Height	Width	Number	Trim A	B
16" Open Stack Kit	16"(406mm)	18"(457mm)	NTOO-1618	\$347.19	\$364.55
		24"(610mm)	NTOO-1624	378.44	398.11
		30"(762mm)	NTOO-1630	409.69	431.67
		36"(914mm)	NTOO-1636	440.94	465.23
		42"(1067mm)	NTOO-1642	472.19	498.79
		48"(1219mm)	NTOO-1648	503.44	532.35
		60"(1524mm)	NTOO-1660	565.94	599.47



NTOO



Features

- Includes one non-handed cross bar with pad attachment brackets, and two outer frames.
- No power or communications access.
- Assembled stack kit thickness is 3"(76mm).
- Shipped unassembled.

To Order, Specify:

- 1) Product number.
- 2) Trim color.


Specification Tips

- Maximum height of a panel configuration is 120"(3048mm).
- Connectors are required to create panel runs and conditions; specify separately.
- Stack kit to be used on the top of a foundation element or 16"(406mm) upper structure element.
- Top cap is provided with all foundation elements and is relocated to top of panel configuration.

Opening Area	Stack Kit Size	Open Height	Open Width
	1618	11.1"(282mm)	14.7"(373mm)
	1624		20.7"(526mm)
	1630		26.7"(678mm)
	1636		32.7"(831mm)
	1642		38.7"(983mm)
	1648		44.7"(1135mm)
	1660		56.7"(1440mm)

Upper Structure Elements — Stack Kits

16" Stack Kit — Structural Cross Bar (for Off-Modular OSU Applications)



NZ-16

Features

- Includes **one structural cross bar** and two pads with pad attachment brackets.
- No power or communications access; cables can be routed horizontally or vertically through the stack kit.
- Pads are field-removable for access to internal cabling or for pad replacement.
- Structural fabric stack kit may have the same fabric on both sides or a different fabric on each side; fabric over steel not tackable.
- Assembled stack kit thickness is 3"(76mm).
- Shipped unassembled.

To Order, Specify:

- 1) Product number.
- 2) Painted or fabric/colorway for side one.*
- 3) Painted or fabric/colorway for side two.*

***Note:** Upcharge for mixed grade fabric or trim surfaces, refer to the electronic catalog for pricing.

Specification Tips

- **Required for standard and up mount overhead storage unit off-modular applications.**
- Maximum height of a panel configuration should not exceed 120"(3048mm).
- Connectors are required to create panel runs and intersection; specify separately.
- Structural cross bars with appropriate stack kits or pads are recommended on panel spine for off-modular applications for movement of overhead storage unit.
- Stack kit to be used on the top of a foundation element or 16"(406mm) upper structure element.
- Top cap is provided with all foundation elements and is located to top of panel configurations.

Upper Structure Elements — Stack Kits

16” Stack Kit — Structural Cross Bar (for Off-Modular OSU Applications)


Height	Width	Side 1 Pad Surface	Side 2 Pad Surface	Number	Trim A	B	Fabric Grade A	B	C	E	F	G
Same Surface Options												
16"(406mm)	24"(610mm)	Structural Fabric	Structural Fabric	NZZZ-1624-NNN			\$458.07	\$483.79	\$490.79	\$507.15	\$523.51	\$539.85
	30"(762mm)			NZZZ-1630-NNN			487.29	513.01	520.01	536.37	552.73	569.07
	36"(914mm)			NZZZ-1636-NNN			516.51	542.23	549.23	597.14	615.84	635.68
	42"(1067mm)			NZZZ-1642-NNN			545.73	571.45	578.45	626.36	645.06	664.90
	48"(1219mm)			NZZZ-1648-NNN			574.95	600.67	607.67	655.58	674.28	694.12
	60"(1524mm)			NZZZ-1660-NNN			633.39	659.11	666.11	714.02	732.72	752.56
16"(406mm)	24"(610mm)	Slat	Slat	NZYY-1624-NNN	\$718.17	\$732.21						
	30"(762mm)			NZYY-1630-NNN	757.43	773.81						
	36"(914mm)			NZYY-1636-NNN	796.69	815.41						
	42"(1067mm)			NZYY-1642-NNN	835.95	857.01						
	48"(1219mm)			NZYY-1648-NNN	875.21	898.61						
	60"(1524mm)			NZYY-1660-NNN	953.73	981.81						

Height	Width	Side 1 Pad Surface	Side 2 Pad Surface	Number	Trim A Fabric Grade		C	E	F	G
					A	B				
Mixed Surface Options										
16"(406mm)	24"(610mm)	Slat	Structural Fabric	NZYZ-1624-NNN	\$577.60	\$590.46	\$593.96	\$602.14	\$610.32	\$618.49
	30"(762mm)			NZYZ-1630-NNN	611.84	624.70	628.20	636.38	644.56	652.73
	36"(914mm)			NZYZ-1636-NNN	646.08	658.94	662.44	688.15	697.50	708.00
	42"(1067mm)			NZYZ-1642-NNN	680.32	693.18	696.68	722.39	731.74	742.24
	48"(1219mm)			NZYZ-1648-NNN	714.56	727.42	730.92	756.63	765.98	776.48
	60"(1524mm)			NZYZ-1660-NNN	783.04	795.90	799.40	825.11	834.46	844.96

Height	Width	Side 1 Pad Surface	Side 2 Pad Surface	Number	Trim B Fabric Grade		C	E	F	G
					A	B				
Mixed Surface Options										
16”(406mm)	24”(610mm)	Slat	Structural Fabric	NZYZ-1624-NNN	\$584.62	\$597.48	\$600.98	\$609.16	\$617.34	\$625.51
	30”(762mm)			NZYZ-1630-NNN	620.03	632.89	636.39	644.57	652.75	660.92
	36”(914mm)			NZYZ-1636-NNN	655.44	668.30	671.80	697.51	706.86	717.36
	42”(1067mm)			NZYZ-1642-NNN	690.85	703.71	707.21	732.92	742.27	752.77
	48”(1219mm)			NZYZ-1648-NNN	726.26	739.12	742.62	768.33	777.68	788.18
	60”(1524mm)			NZYZ-1660-NNN	797.08	809.94	813.44	839.15	848.50	859.00

Upper Structure Elements — Stack Components

Cross Bars

	Width	Number	Price
 NCBB	18"(457mm)	NCBB-18	\$133.21
	24"(610mm)	NCBB-24	140.22
	30"(762mm)	NCBB-30	149.57
	36"(914mm)	NCBB-36	157.75
	42"(1067mm)	NCBB-42	161.26
	48"(1219mm)	NCBB-48	170.61
	60"(1524mm)	NCBB-60	206.83

Features


- Includes one cross bar and pad attachment brackets.
- Provides structural support for 10"(254mm) or 16"(406mm) stack.
- Accepts separately specified 10"(254mm) or 16"(406mm) stack pads.
- Standard in charcoal finish color only.
- Available on RUSH.

To Order, Specify:

- 1) Product number.
(No finish specification required.)

Specification Tips

- To be used in conjunction with individually specified pads and connectors.
- Specify with matching wood pad sets.
- Cannot be used in off-modular overhead applications. See Structural Cross Bar for off-modular conditions.
- Cross bar is included with all PREMISE power kits.

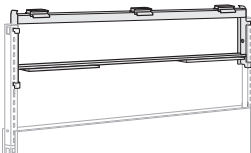 NCBZ	24"(610mm)	NCBZ-24	\$253.57
	30"(762mm)	NCBZ-30	262.92
	36"(914mm)	NCBZ-36	271.10
	42"(1067mm)	NCBZ-42	274.61
	48"(1219mm)	NCBZ-48	283.96
	60"(1524mm)	NCBZ-60	320.18

Features

- Includes one structural cross bar and pad attachment brackets.
- Provides structural support for 16"(406mm) stack.
- Accepts separately specified 16"(406mm) stack pads.
- Standard in charcoal finish color only.

To Order, Specify:


- 1) Product number.
(No finish specification required.)

Specification Tips

- To be used in conjunction with 16"(406mm) slat pad and structural fabric pads only.
- To be used in off-modular overhead applications.
- Cross bar is included with PREMISE structural power kits.

Upper Structure Elements — Stack Components

10" Single Pad



NTP-NN
NTF-NN
NTA-NN
NTW-NN
NTY-NN

NOTES:
When specifying wood pads,
an unmatched vertical wood
grain and natural variations in
wood grain and color can be
expected between pads.
If a consistent look is desired,
specify Matching Wood Pad
Sets.
18" (457mm) wide slat pads
are not available.

Feature <ul style="list-style-type: none">Includes one pad.Available on RUSH.	To Order, Specify: <ol style="list-style-type: none">Product number.Painted, fabric/colorway or wood finish.
Specification Tips <ul style="list-style-type: none">Frequently specified for reconfiguration.When specifying a stack pad to create a stack kit the following components are required: two stack pads, one cross bar with attachment brackets and connectors.10"(254mm) stack kits can only be specified for use at the top of a panel configuration. Additional upper structure elements are not permitted on top of 10"(254mm) stack kits.Maximum height of a panel configuration should not exceed 120"(3048mm).Foundation element is required as the base of every stackable configuration.Slat pad is designed to work with Jump Stuff slat pad tools.Slat pad can be used with wall track.	

Upper Structure Elements — Stack Components

10" Single Pad


Height	Width	Surface	Number	Trim A	Trim B	Fabric Grade A	Fabric Grade B	C	E	F	G
10"(254mm)	18"(457mm)	Painted	NTP-1018-NN	\$ 74.79	\$ 80.41						
	24"(610mm)		NTP-1024-NN	80.63	87.42						
	30"(762mm)		NTP-1030-NN	86.47	94.43						
	36"(914mm)		NTP-1036-NN	92.31	101.44						
	42"(1067mm)		NTP-1042-NN	98.15	108.45						
	48"(1219mm)		NTP-1048-NN	103.99	115.46						
	60"(1524mm)		NTP-1060-NN	115.67	129.48						
10"(254mm)	18"(457mm)	Fabric/Tackable	NTF-1018-NN			\$ 58.43	\$ 71.29	\$ 74.79	\$ 82.97	\$ 93.48	\$ 99.32
	24"(610mm)		NTF-1024-NN	◆		69.53	82.39	85.89	94.07	104.58	110.42
	30"(762mm)		NTF-1030-NN	◆		80.63	93.49	96.99	105.17	115.68	121.52
	36"(914mm)		NTF-1036-NN	◆		91.73	104.59	108.09	130.29	141.97	148.98
	42"(1067mm)		NTF-1042-NN	◆		102.83	115.69	119.19	141.39	153.07	160.08
	48"(1219mm)		NTF-1048-NN	◆		113.93	126.79	130.29	152.49	164.17	171.18
	60"(1524mm)		NTF-1060-NN	◆		136.13	148.99	152.49	174.69	186.37	193.38
10"(254mm)	18"(457mm)	Fabric/Acous./ Tackable	NTA-1018-NN			\$111.02	\$123.88	\$127.38	\$135.56	\$146.07	\$151.91
	24"(610mm)		NTA-1024-NN	◆		126.79	139.65	143.15	151.33	161.84	167.68
	30"(762mm)		NTA-1030-NN	◆		142.56	155.42	158.92	167.10	177.61	183.45
	36"(914mm)		NTA-1036-NN	◆		158.33	171.19	174.69	196.89	208.57	215.58
	42"(1067mm)		NTA-1042-NN	◆		174.10	186.96	190.46	212.66	224.34	231.35
	48"(1219mm)		NTA-1048-NN	◆		189.87	202.73	206.23	228.43	240.11	247.12
	60"(1524mm)		NTA-1060-NN	◆		221.41	234.27	237.77	259.97	271.65	278.66
10"(254mm)	24"(610mm)	Slat	NTY-1024-NN	◆	\$217.93	\$224.72					
	30"(762mm)		NTY-1030-NN	◆	230.20	238.16					
	36"(914mm)		NTY-1036-NN	◆	242.47	251.60					
	42"(1067mm)		NTY-1042-NN	◆	254.74	265.04					
	48"(1219mm)		NTY-1048-NN	◆	267.01	278.48					
	60"(1524mm)		NTY-1060-NN	◆	291.55	305.36					

				Wood Group A	Wood Group B
10"(254mm)	18"(457mm)	Wood	NTW-1018-NN	\$217.36	\$229.04
	24"(610mm)		NTW-1024-NN	236.06	247.74
	30"(762mm)		NTW-1030-NN	254.76	266.44
	36"(914mm)		NTW-1036-NN	273.46	285.14
	42"(1067mm)		NTW-1042-NN	292.16	303.84
	48"(1219mm)		NTW-1048-NN	310.86	322.54
	60"(1524mm)		NTW-1060-NN	348.26	359.94

Upper Structure Elements — Stack Components

10" Single Pads

	Height	Width	Number	White Trim A	Trim B	Patterned Trim A	Trim B
10" Translucent Pad	10"(254mm)	24"(610mm)	NTX-1024-NN (M)	\$232.55	\$238.17	\$295.65	\$301.27
		30"(762mm)	NTX-1030-NN (M)	254.76	261.55	330.12	336.91
		36"(914mm)	NTX-1036-NN (M)	276.97	284.93	364.59	372.55
		42"(1067mm)	NTX-1042-NN (M)	299.18	308.31	399.06	408.19
		48"(1219mm)	NTX-1048-NN (M)	321.39	331.69	433.53	443.83
		60"(1524mm)	NTX-1060-NN (M)	365.81	378.45	502.47	515.11



Feature

- Includes one pad.

Specification Tips


- Frequently specified for reconfiguration.
- Due to the aesthetic properties of this surface material the same surface option for both sides of a stack kit is recommended; mixed stack kit surface materials are not recommended for this surface option.
- When specifying a stack pad to create a stack kit the following components are required: two stack pads, one cross bar with pad attachment brackets and connectors.
- 10"(254mm) stack kits can only be specified for use at the top of a panel configuration. Additional upper structure elements are not permitted on top of 10"(254mm) stack kits.
- Maximum height of a panel configuration should not exceed 120"(3048mm).
- Foundation element is required as the base of every stackable configuration.
- Due to the aesthetic properties of the translucent surface material, it is not recommended to route cables behind pads.

(M) Product marked with this symbol available as GSA open market.

To Order, Specify:

- Product number.
- Translucent color/pattern.
- Trim color for frame.

PREMISE — 10" Single Technology Fabric Pad



Height	Width	Surface	Number	Fabric Grade						
				A	B	C	E	F	G	
10"(254mm)	30"(762mm)	Fabric/Tackable	NTF-1030-EC	🚩	\$244.23	\$257.09	\$260.59	\$268.77	\$279.28	\$285.12
			NTF-1036-EC	🚩	265.85	278.71	282.21	304.41	316.09	323.10
			NTF-1042-EC	🚩	276.95	289.81	293.31	315.51	327.19	334.20
			NTF-1048-EC	🚩	288.05	300.91	304.41	326.61	338.29	345.30
			NTF-1060-EC	🚩	310.25	323.11	326.61	348.81	360.49	367.50

Feature

- Includes one pad, power/communications bezel, receptacle and data blank plate to fill each opening on pad, furniture data plate mounting bracket(s). All sizes include 1 data bracket - if additional required order part #NEAC-0000.


◆ Available on RUSH.

To Order, Specify:

- Product number.
- Fabric/colorway.
- Non-metallic trim color for bezels.


Specification Tips

- For stack kit application, specify pad for opposite side and appropriate power kit.**
- Bezel communication port opening accepts furniture data plates on data mounting bracket which must be installed on the cable trough.
- Maximum height of a panel configuration should not exceed 120"(3048mm).
- 10"(254mm) technology pads with power and communications can be used in back-to-back applications.
- Foundation element is required as the base of every stackable configuration.
- Specify triplex receptacles separately.
- 30" technology pad has only one bezel on left-hand side, no blank plates included.



Upper Structure Elements — Stack Components

Markerboard Pads

	Height	Width	Number	Price
10" Single Markerboard Pad 	10"(254mm)	18"(457mm)	NTM-1018	\$343.56
		24"(610mm)	NTM-1024	357.58
		30"(762mm)	NTM-1030	371.60
		36"(914mm)	NTM-1036	385.62
		42"(1067mm)	NTM-1042	399.64
		48"(1219mm)	NTM-1048	413.66
		60"(1524mm)	NTM-1060	441.70

NTM-10

Features


- Includes one pad with removable tray.
- White erasable writing surface with removable tray.
- Markers and erasers not included.
- Laminate with 1mm edge banding.
- Tray is standard in charcoal.

To Order, Specify:

- 1) Product number.
(No finish specification required.)

Specification Tips

- Installs in panel connector slots on same width panel or multiple width panels, equal to markerboard width.
- When specifying a stack pad to create a stack kit the following components are required: two stack pads, one cross bar with pad attachment brackets and connectors.
- Maximum height of a panel configuration should not exceed 120"(3048mm).
- For stack kit application only.
- Foundation element is required as the base of every stackable configuration.
- **The following products are recommended to maintain the markerboard appearance:**
 - Dry erase marker kit (includes holder, six markers and eraser), order part# 7062-8001.
 - Markerboard cleaner and conditioner, order part# 7031-7001.
 - Markerboard spray cleaner, order part# 7031-7002.

16" Single Markerboard Pad 	16"(406mm)	18"(457mm)	NTM-1618	\$343.56
		24"(610mm)	NTM-1624	358.17
		30"(762mm)	NTM-1630	372.78
		36"(914mm)	NTM-1636	387.39
		42"(1067mm)	NTM-1642	402.00
		48"(1219mm)	NTM-1648	416.61
		60"(1524mm)	NTM-1660	445.83

NTM-16

Features

- Includes one pad with removable tray.
- White erasable writing surface with removable tray.
- Markers and erasers not included.
- Laminate with 1mm edge banding.
- Tray is standard in charcoal.

To Order, Specify:

- 1) Product number.
(No finish specification required.)


Specification Tips

- Installs in panel connector slots on same width panel or multiple width panels, equal to markerboard width.
- When specifying a stack pad to create a stack kit the following components are required: two stack pads, one cross bar with pad attachment brackets and connectors.
- Maximum height of a panel configuration should not exceed 120"(3048mm).
- For stack kit application only.
- Foundation element is required as the base of every stackable configuration.
- **The following products are recommended to maintain the markerboard appearance:**
 - Dry erase marker kit (includes holder, six markers and eraser), order part# 7062-8001.
 - Markerboard cleaner and conditioner, order part# 7031-7001.
 - Markerboard spray cleaner, order part# 7031-7002.

Upper Structure Elements — Stack Components

Markerboard Pads

	Height	Width	Number	Price
32" Single Markerboard Pad	32"(813mm)	18"(457mm)	NTM-3218	\$343.56
		24"(610mm)	NTM-3224	358.17
		30"(762mm)	NTM-3230	372.78
		36"(914mm)	NTM-3236	387.39
		42"(1067mm)	NTM-3242	402.00
		48"(1219mm)	NTM-3248	416.61
		60"(1524mm)	NTM-3260	445.83



NTM-32

Features

- Includes one pad with removable tray.
- White erasable writing surface with removable tray.
- Markers and erasers not included.
- Laminate with 1mm edge banding.
- Tray is standard in charcoal.

To Order, Specify:

- 1) Product number.
(No finish specification required.)


Specification Tips

- Installs in panel connector slots on same width panel or multiple width panels, equal to markerboard width.
- Must be used with two 16"(406mm) high pads or another 32"(813mm) high marker board pad on opposite pad.
- When specifying a stack pad to create a stack kit the following components are required: two stack pads, one cross bar with pad attachment brackets and connectors.
- Maximum height of a panel configuration should not exceed 120"(3048mm).
- For stack kit application only.
- Foundation element is required as the base of every stackable configuration.
- **The following products are recommended to maintain the markerboard appearance:**
 - Dry erase marker kit (includes holder, six markers and eraser), order part# 7062-8001.
 - Markerboard cleaner and conditioner, order part# 7031-7001.
 - Markerboard spray cleaner, order part# 7031-7002.

This page intentionally blank

Upper Structure Elements – Stack Components

16" Single Pad



NTP-NN
NTF-NN
NTA-NN
NTW-NN
NTY-NN

NOTES:
When specifying wood pads, an unmatched vertical wood grain and natural variations in wood grain and color can be expected between pads. If a consistent look is desired, specify Matching Wood Pad Sets.
18" (457mm) wide perforated and slat pads are not available.

Feature <ul style="list-style-type: none">Includes one pad.Available on RUSH.	To Order, Specify: <ol style="list-style-type: none">Product number.Painted, fabric/colorway or wood finish.
Specification Tips <ul style="list-style-type: none">Frequently specified for reconfiguration.When specifying a stack pad to create a stack kit the following components are required: two stack pads, one cross bar with attachment brackets and panel connectors.Maximum height of a panel configuration should not exceed 120"(3048mm).Foundation element is required as the base of every stackable configuration.Due to the aesthetic properties of the perforated surface material, it is not recommended to route cables behind pads.Slat pad is designed to work with Jump Stuff slat pad tools.Slat pad can be used with wall track.Structural fabric over steel pads to be used with structural crossbars for off modular applications.	

Upper Structure Elements – Stack Components


16" Single Pad

Height	Width	Surface	Number	Trim A	Trim B	Fabric Grade		C	E	F	G
16"(406mm)	18"(457mm)	Painted	NTP-1618-NN	\$ 74.79	\$ 84.99						
	24"(610mm)		NTP-1624-NN	82.09	93.46						
	30"(762mm)		NTP-1630-NN	89.39	101.93						
	36"(914mm)		NTP-1636-NN	96.69	110.40						
	42"(1067mm)		NTP-1642-NN	103.99	118.87						
	48"(1219mm)		NTP-1648-NN	111.29	127.34						
	60"(1524mm)		NTP-1660-NN	125.89	144.28						
16"(406mm)	18"(457mm)	Fabric/Tackable	NTF-1618-NN			\$ 58.43	\$ 71.29	\$ 74.79	\$ 82.97	\$ 91.15	\$ 99.32
	24"(610mm)		NTF-1624-NN	70.99	83.85	87.35	95.53	103.71	111.88		
	30"(762mm)		NTF-1630-NN	83.55	96.41	99.91	108.09	116.27	124.44		
	36"(914mm)		NTF-1636-NN	96.11	108.97	112.47	134.67	144.02	153.36		
	42"(1067mm)		NTF-1642-NN	108.67	121.53	125.03	147.23	156.58	165.92		
	48"(1219mm)		NTF-1648-NN	121.23	134.09	137.59	159.79	169.14	178.48		
	60"(1524mm)		NTF-1660-NN	146.35	159.21	162.71	184.91	194.26	203.60		
16"(406mm)	18"(457mm)	Fabric/Acous./ Tackable	NTA-1618-NN			\$111.02	\$123.88	\$127.38	\$135.56	\$143.74	\$151.91
	24"(610mm)		NTA-1624-NN	128.25	141.11	144.61	152.79	160.97	169.14		
	30"(762mm)		NTA-1630-NN	145.48	158.34	161.84	170.02	178.20	186.37		
	36"(914mm)		NTA-1636-NN	162.71	175.57	179.07	201.27	210.62	219.96		
	42"(1067mm)		NTA-1642-NN	179.94	192.80	196.30	218.50	227.85	237.19		
	48"(1219mm)		NTA-1648-NN	197.17	210.03	213.53	235.73	245.08	254.42		
	60"(1524mm)		NTA-1660-NN	231.63	244.49	247.99	270.19	279.54	288.88		
16"(406mm)	24"(610mm)	Structural Fabric	NTZ-1624-NN			\$103.43	\$116.29	\$119.79	\$127.97	\$136.15	\$144.32
	30"(762mm)		NTZ-1630-NN	111.03	123.89	127.39	135.57	143.75	151.92		
	36"(914mm)		NTZ-1636-NN	118.63	131.49	134.99	157.19	166.54	175.88		
	42"(1067mm)		NTZ-1642-NN	126.23	139.09	142.59	164.79	174.14	183.48		
	48"(1219mm)		NTZ-1648-NN	133.83	146.69	150.19	172.39	181.74	191.08		
	60"(1524mm)		NTZ-1660-NN	149.03	161.89	165.39	187.59	196.94	206.28		
16"(406mm)	24"(610mm)	Perforated	NTH-1624-NN	\$190.76	\$202.13						
	30"(762mm)		NTH-1630-NN	209.74	222.28						
	36"(914mm)		NTH-1636-NN	228.72	242.43						
	42"(1067mm)		NTH-1642-NN	247.70	262.58						
	48"(1219mm)		NTH-1648-NN	266.68	282.73						
	60"(1524mm)		NTH-1660-NN	304.64	323.03						
	16"(406mm)		24"(610mm)	Slat	NTY-1624-NN	\$219.45	\$230.82				
30"(762mm)		NTY-1630-NN	233.24		245.78						
36"(914mm)		NTY-1636-NN	247.03		260.74						
42"(1067mm)		NTY-1642-NN	260.82		275.70						
48"(1219mm)		NTY-1648-NN	274.61		290.66						
60"(1524mm)		NTY-1660-NN	302.19		320.58						
					Wood Group A	Wood Group B					
16"(406mm)	18"(457mm)	Wood	NTW-1618-NN	\$217.36	\$234.89						
	24"(610mm)		NTW-1624-NN	241.90	259.43						
	30"(762mm)		NTW-1630-NN	266.44	283.97						
	36"(914mm)		NTW-1636-NN	290.98	308.51						
	42"(1067mm)		NTW-1642-NN	315.52	333.05						
	48"(1219mm)		NTW-1648-NN	340.06	357.59						
	60"(1524mm)		NTW-1660-NN	389.14	406.67						

Upper Structure Elements – Stack Components

16" Translucent Pad

16" Translucent Pad



NTX

Height	Width	Number	White Trim A	Trim B	Patterned Trim A	Trim B
16"(406mm)	24"(610mm)	NTX-1624-NN	\$234.88	\$245.08	\$301.49	\$311.69
	30"(762mm)	NTX-1630-NN	259.42	270.79	326.03	337.40
	36"(914mm)	NTX-1636-NN	283.96	296.50	350.57	363.11
	42"(1067mm)	NTX-1642-NN	308.50	322.21	375.11	388.82
	48"(1219mm)	NTX-1648-NN	333.04	347.92	399.65	414.53
	60"(1524mm)	NTX-1660-NN	382.12	399.34	448.73	465.95

Feature

- Includes one pad.

Specification Tips

- Frequently specified for reconfiguration.
- Due to the aesthetic properties of this surface material the same surface option for both sides of a stack kit is recommended; mixed stack kit surface materials are not recommended for this surface option.
- When specifying a stack pad to create a stack kit the following components are required: two stack pads, one cross bar with pad attachment brackets and connectors.
- Maximum height of a panel configuration should not exceed 120"(3048mm).
- Foundation element is required as the base of every stackable configuration.
- Due to the aesthetic properties of the translucent surface material, it is not recommended to route cables behind pads.


To Order, Specify:

- Product number.
- Translucent color/pattern.
- Trim color for frame.

Upper Structure Elements – Stack Components

Glazed Pads

Single Pane Pads — 16" Frame with Glazing



NTS

Height	Width	Number	Glass		C	D	Trim A	Trim B
			A	Trim A				
16"(406mm)	18" (457mm)	NTS-1618	\$291.11	\$315.18	\$526.06	\$550.13	\$ 645.25	\$ 669.32
	24"(610mm)	NTS-1624	316.17	340.24	575.50	599.57	714.83	738.90
	30"(762mm)	NTS-1630	341.23	365.30	624.94	649.01	784.41	808.48
	36"(914mm)	NTS-1636	366.29	390.36	674.38	698.45	853.99	878.06
	42"(1067mm)	NTS-1642	391.35	415.42	723.82	747.89	923.57	947.64
	48"(1219mm)	NTS-1648	416.41	440.48	773.26	797.33	993.15	1017.22
	60"(1524mm)	NTS-1660	466.53	490.60	872.14	896.21	1132.31	1156.38

Features

- Includes two outer frames, one with glazing and one aluminum pad attachment bracket.
- Glazing material for English Reeded and Patterned is textured on one side only.


To Order, Specify:

- Product number.
- Glazing finish.
- Trim color for frame.

Specification Tips

- Requires the support of a cross bar with pad attachment brackets and connectors.
- Maximum height of a panel configuration should not exceed 120"(3048mm).
- Foundation element is required as the base of every stackable configuration.
- One of the plastic pad attachment brackets on the cross bar must be replaced with an aluminum attachment bracket.
- Single pane is not available in floor-to-ceiling (FTC) pad sets.

Double Pane Pads — 16" Frame with Glazing



NTG-16

Height	Width	Number	Glass		D	Trim A	Trim B
			A	Trim A			
16"(406mm)	18"(457mm)	NTG-1618	\$326.63	\$350.70	\$ 856.97	\$ 881.04	
	24"(610mm)	NTG-1624 ◆	357.35	381.42	961.33	985.40	
	30"(762mm)	NTG-1630 ◆	388.07	412.14	1065.69	1089.76	
	36"(914mm)	NTG-1636 ◆	418.79	442.86	1170.05	1194.12	
	42"(1067mm)	NTG-1642 ◆	449.51	473.58	1274.41	1298.48	
	48"(1219mm)	NTG-1648 ◆	480.23	504.30	1378.77	1402.84	
	60"(1524mm)	NTG-1660 ◆	541.67	565.74	1587.49	1611.56	

Features

- Includes two outer frames both with glazing.
- Converts an existing stack kit to a glazed stack.
- ◆ Available on RUSH.

To Order, Specify:


- Product number.
- Glazing finish.
- Trim color for frame.

Specification Tips

- Requires the support of a cross bar with pad attachment brackets and connectors.
- Maximum height of a panel configuration should not exceed 120"(3048mm).
- Foundation element is required as the base of every stackable configuration.

Upper Structure Elements – Stack Components

16” Open Frame Pads



NTO-16

	Height	Width	Number	Trim A	B
16” Open Frame Pads	16”(406mm)	18”(457mm)	NTO-1618	\$112.32	\$142.12
		24”(610mm)	NTO-1624	122.79	154.28
		30”(762mm)	NTO-1630	133.26	166.44
		36”(914mm)	NTO-1636	143.73	178.60
		42”(1067mm)	NTO-1642	154.20	190.76
		48”(1219mm)	NTO-1648	164.67	202.92
		60”(1524mm)	NTO-1660	185.61	227.24

Features

- Includes two outer frames.
- Converts an existing stack kit to an open stack.

To Order, Specify:

- 1) Product number.
- 2) Trim color.


Specification Tips

- Requires the support of a cross bar with pad attachment brackets.
- Maximum height of a panel configuration should not exceed 120”(3048mm).
- Foundation element is required as the base of every stackable configuration.


Upper Structure Elements – Stack Components

16" Single Technology Fabric Pads

PREMISE — 16" Single Technology Fabric Pad



NTF-EC



30" Pad Only



Height	Width	Surface	Number	Fabric Grade					
				A	B	C	E	F	G
16"(406mm)	30"(762mm)	Fabric/Tackable	NTF-1630-EC	◆ \$247.15	\$260.01	\$263.51	\$271.69	\$279.87	\$288.04
	36"(914mm)		NTF-1636-EC	◆ 270.23	283.09	286.59	308.79	318.14	327.48
	42"(1067mm)		NTF-1642-EC	◆ 282.79	295.65	299.15	321.35	330.70	340.04
	48"(1219mm)		NTF-1648-EC	◆ 295.35	308.21	311.71	333.91	343.26	352.60
	60"(1524mm)		NTF-1660-EC	◆ 320.47	333.33	336.83	359.03	368.38	377.72

Feature

- Includes one pad, power/communications bezel, receptacle and data blank plate to fill each opening on pad, furniture data plate mounting bracket(s). All sizes include 1 data bracket. If additional required, order part #NEAC-0000.

◆ Available on RUSH.

To Order, Specify:






- Product number.
- Fabric/colorway.
- Non-metallic trim color for bezels.


Specification Tips

- For stack kit application, specify pad for opposite side and appropriate power kit.
- Bezel communication port opening accepts furniture data plates on data mounting bracket which must be installed on the cable trough.
- Maximum height of a panel configuration should not exceed 120"(3048mm).
- 16"(406mm) technology pads with power and communications can be used in back-to-back applications.
- Foundation element is required at the base of every stackable configuration.
- Specify triplex receptacles separately.
- 30" technology pad has only one bezel on left-hand side, no blank plates included.


Upper Structure Elements – Stack Components

16" Single Technology Slat Pads

	Height	Width	Surface	Number	Trim A	B
PREMISE — 16" Single Technology Slat Pad	16"(406mm)	30"(762mm)	Slat	NTY-1630-EC 	\$422.55	\$435.09
		36"(914mm)		NTY-1636-EC 	483.07	496.78
		42"(1067mm)		NTY-1642-EC 	496.86	511.74
		48"(1219mm)		NTY-1648-EC 	510.65	526.70
		60"(1524mm)		NTY-1660-EC 	538.23	556.62




NTY-EC



30" Pad Only



Feature

- Includes one pad, power/communications bezel, receptacle and data blank plate to fill each opening on pad, furniture data plate mounting bracket(s). All sizes include 1 data bracket. If additional required, order part #NEAC-0000.
-  Available on RUSH.

To Order, Specify:

- Product number.
- Painted slat pad color.
- Non-metallic trim color for bezels.


Specification Tips

- For stack kit application specify pad for opposite side and appropriate power kit and power connector(s).
- For off-modular overheads specify a structural power kit for use with technology slat pads only.
- Bezel communication port opening accepts furniture data plates on data mounting bracket which must be installed on cable trough.
- Maximum height of a panel configuration should not exceed 120"(3048mm).
- 16"(406mm) technology pads with power and communications can be used in back-to-back applications.
- Foundation element is required as the base of every stackable configuration.
- Slat pad is designed to work with Jump Stuff slat pad tools.
- Specify triplex receptacles separately.
- 30" technology pad has only one bezel on left-hand side, no blank plates included.

Upper Structure Elements — Floor-to-Ceiling

Connectors

	Height	Width	Length	Number	Trim A	B
Floor-to-Ceiling Track	2"(51mm)	3"(76mm)	10'(3048mm)	NQRC-10	\$390.29	\$423.01



NQRC-10

NOTE:

Ceiling track is required to support ceiling pads or glazing frame.

Features

- Includes 10'(3048mm) section of track, ceiling gasket, pad retaining clips and two straight connector brackets.
- Provides a finished appearance at the ceiling and supports the top of the ceiling pad or glazing.
- Track is supported by separately specified connector (NQS-S) and rests against the ceiling material.


To Order, Specify:

- 1) Product number.
- 2) Trim color.

Specification Tips

- Track can be field cut to the necessary length.
- Track does not connect to the ceiling material.
- Consider all ceiling mounted obstacles (i.e. sprinkler heads, light fixtures) and adjust floor plan to provide clearance. Add lineal feet of ceiling track required and divide by 10 to determine the quantity of ceiling track required.
- Consult local building and fire codes.

Floor-to-Ceiling Straight Connector



NQS-S

Height	Number	Price
25"(635mm)	NQS-S	\$109.84

Features

- Includes a two-piece vertical connector with bayonet, and one L bracket.
- Connects floor-to-ceiling pad set and ceiling track in a straight run.
- Floor-to-ceiling connectors do not include mounting slots for load bearing components.
- Standard in black finish color only.
- Shipped unassembled.

To Order, Specify:

- 1) Product number.
(No finish specification required.)

Specification Tips

- Straight connector can only be specified for use at the top of a panel configuration and cannot be placed on top of 10"(254mm) connector.
- Can be field cut to a minimum height of 8"(203mm).
- One straight connector is required at every in-line panel condition.
- Total panel configuration cannot exceed 120"(3048mm).
- Can be installed directly on a monolithic panel or stack kit.

Upper Structure Elements — Floor-to-Ceiling


Connectors

Width	Depth	Height	Painted Cover Number	Trim A	Fabric Cover Number	Trim A Fabric Grade		C	E	F	G
3"(76mm)	3"(76mm)	25"(635mm)	NQ2P-24	\$530.52	NQ2F-24	\$565.58	\$617.00	\$674.25	\$796.96	\$882.26	\$932.50


Width	Depth	Height	Painted Cover Number	Trim B	Fabric Cover Number	Trim B Fabric Grade		C	E	F	G
3"(76mm)	3"(76mm)	25"(635mm)	NQ2P-24	\$549.22	NQ2F-24	\$584.28	\$635.70	\$692.95	\$815.66	\$900.96	\$951.20

Width	Depth	Height	Wood Cover Number	Wood Group A Trim A	Trim B	Wood Group B Trim A Trim B	
3"(76mm)	3"(76mm)	25"(635mm)	NQ2W-24	\$602.97	\$621.67	\$669.58	\$688.28

Floor-to-Ceiling 2-Way Connector with Cover



Top View



NQ2P-24
NQ2F-24
NQ2W-24

Features

- Includes two straight connectors with L-brackets, pre-assembled section of 2-way ceiling track, two straight connector brackets and cover.
- Connects floor-to-ceiling pad set and ceiling track in a two-way condition.
- Floor-to-ceiling connectors do not include mounting slots for load bearing components.
- Straight connectors are standard in black finish color only.
- Shipped unassembled.

Specification Tips

- Can be field cut to a minimum height of 8"(203mm).
- Two-way connector can only be specified for use at the top of a panel configuration and cannot be placed on top of 10"(254mm) connector.
- Can be installed directly on a monolithic panel or stack kit.
- Track does not connect to the ceiling material.

To Order, Specify:

- 1) Product number.
- 2) Painted, fabric/colorway or wood finish for cover.
- 3) Trim for ceiling track.

Upper Structure Elements — Floor-to-Ceiling


Connectors

Width	Depth	Height	Painted Cover Number	Trim A	Fabric Cover Number	Trim A Fabric Grade		C	E	F	G
3"(76mm)	3"(76mm)	25"(635mm)	NQ3P-24	\$626.34	NQ3F-24	\$678.92	\$746.70	\$823.82	\$987.41	\$1100.77	\$1168.54


Width	Depth	Height	Painted Cover Number	Trim B	Fabric Cover Number	Trim B Fabric Grade		C	E	F	G
3"(76mm)	3"(76mm)	25"(635mm)	NQ3P-24	\$645.04	NQ3F-24	\$697.62	\$765.40	\$842.52	\$1006.11	\$1119.47	\$1187.24

Width	Depth	Height	Wood Cover Number	Wood Group A Trim A	Trim B	Wood Group B Trim A	Trim B
3"(76mm)	3"(76mm)	25"(635mm)	NQ3W-24	\$716.32	\$735.02	\$803.96	\$ 822.66

Floor-to-Ceiling 3-Way Connector with Cover



Top View

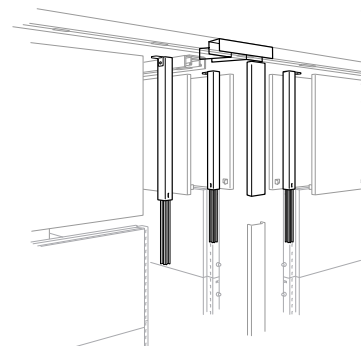

NQ3P-24
NQ3F-24
NQ3W-24

Features

- Includes three straight connectors with L-brackets, pre-assembled section of 3-way ceiling track, four straight connector brackets and cover.
- Connects floor-to-ceiling pad set and ceiling track in a three-way condition.
- Floor-to-ceiling connectors do not include mounting slots for load bearing components.
- Straight connectors are standard in black finish color only.
- Shipped unassembled.

Specification Tips

- Can be field cut to a minimum height of 8"(203mm).
- Three-way connector can only be specified for use at the top of a panel configuration and cannot be placed on top of 10"(254mm) connector.
- Can be installed directly on a monolithic panel or stack kit.
- Track does not connect to the ceiling material.


To Order, Specify:

- 1) Product number.
- 2) Painted, fabric/colorway or wood finish for cover.
- 3) Trim for ceiling track.


Upper Structure Elements — Floor-to-Ceiling

Connectors

	Width	Height	Number	Trim	
				A	B
Floor-to-Ceiling 4-Way Connector with Cover	3"(76mm)	25"(635mm)	NQ4S-24	\$723.32	\$742.02



Top View



NQ4S-24

Features

- Includes four straight connectors with L-brackets, pre-assembled section of 4-way ceiling track, six straight connector brackets and cover.
- Connects floor-to-ceiling pad set and ceiling track in a four-way condition.
- Floor-to-ceiling connectors do not include mounting slots for load bearing components.
- Straight connectors are standard in black finish color only.
- Shipped unassembled.

Specification Tips

- Can be field cut to a minimum height of 8"(203mm).
- Four-way connector can only be specified for use at the top of a panel configuration and cannot be placed on top of 10"(254mm) connector.
- Can be installed directly on a monolithic panel or stack kit.
- Track does not connect to the ceiling material.

To Order, Specify:

- 1) Product number.
- 2) Trim for ceiling track.

Upper Structure Elements — Floor-to-Ceiling


Pads

Height	Width	Depth	Painted Cover A	Trim Number	Fabric Cover A	Trim A Fabric Grade B	C	E	F	G	
25"(635mm)	3"(76mm)	1 1/8"(29mm)	NQEP-24	\$225.53	NQEF-24	\$247.74	\$251.25	\$254.75	\$262.93	\$268.77	\$272.28

Height	Width	Depth	Painted Cover Number	Trim B	Fabric Cover Number	Trim B Fabric Grade A	B	C	E	F	G
25"(635mm)	3"(76mm)	1 1/8"(29mm)	NQEP-24	\$244.23	NQEF-24	\$266.44	\$269.95	\$273.45	\$281.63	\$287.47	\$290.98

Height	Width	Depth	Wood Cover Number	Wood Group A Trim A	Trim B	Wood Group B Trim A	Trim B
25"(635mm)	3"(76mm)	1 1/8"(29mm)	NQEW-24	\$268.77	\$287.47	\$276.95	\$295.65

Floor-to-Ceiling End-of-Run Connector with Cover



NQEP-24
NQEF-24
NQEW-24

Features

- Includes straight connector, L-bracket, V-clip, cover and ceiling track finish piece.
- Supports the ceiling track and provides a finished appearance at the end of a panel run.
- Straight connector is standard in black finish color only.
- Shipped unassembled.

Specification Tips

- End-of-run connector can only be specified for use at the top of a panel configuration and cannot be placed on top of 10"(254mm) connector.
- Can be field cut to a minimum height of 8"(203mm).
- One straight connector is required at every in-line panel condition.
- Top cap of the lower panel requires field cutting of the top cap to accommodate the top cap adaptor provided with the cover.
- Total panel configuration cannot exceed 120"(3048mm).
- Can be installed directly on a monolithic panel or stack kit.

To Order, Specify:

- 1) Product number.
- 2) Painted, fabric/colorway or wood finish for covers.
- 3) Trim color for top cap.

Upper Structure Elements — Floor-to-Ceiling


Pads

Height	Width	Depth	Painted Cover Number	Trim A	Fabric Cover Number	Trim A		E	F	G	
						Fabric Grade B	C				
24 3/4"(629mm)	3"(76mm)	1 1/8"(29mm)	NQVP-24	\$49.08	NQVF-24	\$70.11	\$73.62	\$77.12	\$84.13	\$89.97	\$92.32

Height	Width	Depth	Painted Cover Number	Trim B	Fabric Cover Number	Trim B Fabric Grade		C	E	F	G
24 3/4"(629mm)	3"(76mm)	1 1/8"(29mm)	NQVP-24	\$67.78	NQVF-24	\$88.81	\$ 92.32	\$95.82	\$102.83	\$108.67	\$111.02

Height	Width	Depth	Wood Cover Number	Wood Group A Trim A	Trim B	Wood Group B Trim A	Trim B
24 3/4"(629mm)	3"(76mm)	1 1/8"(29mm)	NQVW-24	\$89.97	\$108.67	\$96.98	\$115.68

Floor-to-Ceiling Variable-Height Cover



NQVP-24
NQVF-24
NQVW-24

Features

- Includes one cover, ceiling track finish piece and top cap adaptor.
- Provides finished appearance on exposed connector in straight, two-way, three-way or four-way conditions.

Specification Tips

- Variable-Height connector can only be specified for use at the top of a panel configuration and cannot be placed on top of 10"(254mm) connector.
- Can be field cut to a minimum height of 8"(203mm).
- One straight connector is required at every in-line panel condition.
- Total panel configuration cannot exceed 120"(3048mm).
- Must be used with separately specified floor-to-ceiling connectors.


To Order, Specify:

- 1) Product number.
- 2) Painted, fabric/colorway or wood finish for cover.
- 3) Trim color for top cap.

Upper Structure Elements — Floor-to-Ceiling

Pads

	Height	Depth	Number	Price
Floor-to-Ceiling Wall Mount Kit	41"(1041mm)	1/2"(13mm)	NQSW-40	\$99.32

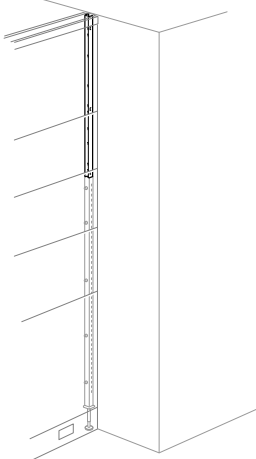

NQSW-40

Features

- Includes channel.
- For mounting stack kit above 80"(2032mm) height to a structural wall.
- Adds 1/4"(6mm) to panel width.
- Wall mount kit does not include mounting slots for load bearing components.
- Standard in black finish color only.

Specification Tip

- Use in conjunction with wall mount kit and upper structure connectors.

To Order, Specify:

- 1) Product number.
(No finish specification required.)


Upper Structure Elements — Floor-to-Ceiling

Pads

Height	Width	Side 1	Side 2	Number	Fabric Grade		C	E	F	G
		Pad Surface	Pad Surface		A	B				
24"(610mm)	18"(457mm)	Fabric	Fabric	NNFF-2418	\$ 369.84	\$ 395.78	\$412.30	\$452.44	\$ 466.58	\$ 485.46
	24"(610mm)			NNFF-2424	398.16	428.34	449.68	500.02	521.24	544.36
	30"(762mm)			NNFF-2430	426.48	460.90	487.06	547.60	575.90	603.26
	36"(914mm)			NNFF-2436	454.80	493.46	524.44	595.18	630.56	662.16
	42"(1067mm)			NNFF-2442	483.12	526.02	561.82	642.76	685.22	721.06
	48"(1219mm)			NNFF-2448	511.44	558.58	599.20	690.34	739.88	779.96
	60"(1524mm)			NNFF-2460	568.08	623.70	673.96	785.50	849.20	897.76
Wood Group A										
24"(610mm)	18"(457mm)	Fabric	Wood	NNFW-2418	\$ 503.16	\$ 516.13	\$524.39	\$544.46	\$ 551.53	\$ 560.97
	24"(610mm)			NNFW-2424	546.82	561.91	572.58	597.75	608.36	619.92
	30"(762mm)			NNFW-2430	590.48	607.69	620.77	651.04	665.19	678.87
	36"(914mm)			NNFW-2436	634.14	653.47	668.96	704.33	722.02	737.82
	42"(1067mm)			NNFW-2442	677.80	699.25	717.15	757.62	778.85	796.77
	48"(1219mm)			NNFW-2448	721.46	745.03	765.34	810.91	835.68	855.72
	60"(1524mm)			NNFW-2460	808.78	836.59	861.72	917.49	949.34	973.62
Wood Group B										
24"(610mm)	18"(457mm)	Fabric	Wood	NNFW-2418	\$ 526.89	\$ 539.86	\$548.12	\$568.19	\$ 575.26	\$ 584.70
	24"(610mm)			NNFW-2424	575.80	590.89	601.56	626.73	637.34	648.90
	30"(762mm)			NNFW-2430	624.71	641.92	655.00	685.27	699.42	713.10
	36"(914mm)			NNFW-2436	673.62	692.95	708.44	743.81	761.50	777.30
	42"(1067mm)			NNFW-2442	722.53	743.98	761.88	802.35	823.58	841.50
	48"(1219mm)			NNFW-2448	771.44	795.01	815.32	860.89	885.66	905.70
	60"(1524mm)			NNFW-2460	869.26	897.07	922.20	977.97	1009.82	1034.10

Height	Width	Side 1 Pad Surface	Side 2 Pad Surface	Number	Wood Group A	Wood Group B
24"(610mm)	18"(457mm)	Wood	Wood	NNWW-2418	\$ 636.48	\$ 683.94
	24"(610mm)			NNWW-2424	702.56	760.52
	30"(762mm)			NNWW-2430	768.64	837.10
	36"(914mm)			NNWW-2436	834.72	913.68
	42"(1067mm)			NNWW-2442	900.80	990.26
	48"(1219mm)			NNWW-2448	966.88	1066.84
	60"(1524mm)			NNWW-2460	1099.04	1220.00

Floor-to-Ceiling Pads



NNFF
NNFW
NNWW

Feature

- Includes two pads and pad attachment clips.

Specification Tips

- Pads can be field cut to a minimum height of 8"(203mm).
- Must be used with separately specified floor-to-ceiling connectors and ceiling tracks.
- Floor-to-ceiling pads can only be specified for use at the top of a panel configuration and cannot be placed on top of 10"(254mm) stack kits.


To Order, Specify:

- Product number.
- Fabric/colorway or wood finish for side one.
- Fabric/colorway or wood finish for side two.

Note: Upcharge for mixed grade surfaces, refer to the electronic catalog for pricing.

Upper Structure Elements — Floor-to-Ceiling

Pads

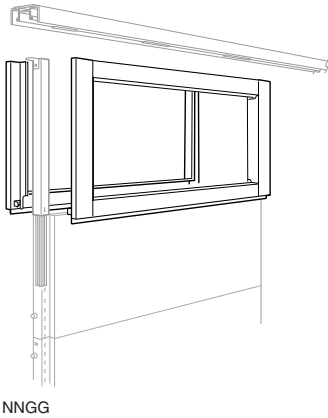	Height	Width	Number	Trim A	B
Open Frame for Glazing 	24"(610mm)	18"(457mm)	NNGG-2418	\$378.61	\$399.64
		24"(610mm)	NNGG-2424	397.31	418.34
		30"(762mm)	NNGG-2430	421.85	446.39
		36"(914mm)	NNGG-2436	466.25	494.30
		42"(1067mm)	NNGG-2442	491.96	523.52
		48"(1219mm)	NNGG-2448	522.35	557.42
		60"(1524mm)	NNGG-2460	609.99	652.08

Feature

- Includes two outer frames and ceiling track insert.

Specification Tips

- Frames can be field cut to a minimum height of 8"(203mm).
- Must be used with separately specified floor-to-ceiling connectors and ceiling tracks.
- Floor-to-ceiling pads can only be specified for use at the top of a panel configuration and cannot be placed on top of 10"(254mm) stack kits.
- Customer needs to supply two pieces .115"(2.92mm) to .130"(3.30mm) thick glazing material.**
- Not available for use with single pane glass.


To Order, Specify:

- Product number.
- Trim color for frame.

Opening/Glazing Area	Stack Kit Size	Open Height	Open Width
	2418	22"(559mm)	14.7"(373mm)
	2424		20.7"(526mm)
	2430		26.7"(678mm)
	2436		32.7"(831mm)
	2442		38.7"(983mm)
	2448		44.7"(1135mm)
	2460		56.7"(1440mm)

Visual Privacy Elements — Panel Attached

Fabric Scrim — Stand Alone Kit

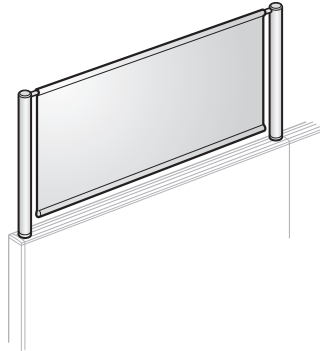

NBPA-F

Height	Width	Number	Trim A	B
16"(406mm)	24"(610mm)	NBPA-1624-F	\$182.87	\$186.41
	30"(762mm)	NBPA-1630-F	207.65	212.96
	36"(914mm)	NBPA-1636-F	232.43	239.51
	42"(1067mm)	NBPA-1642-F	257.21	266.06
	48"(1219mm)	NBPA-1648-F	281.99	292.61
	54"(1372mm)	NBPA-1654-F	298.51	310.31
	60"(1524mm)	NBPA-1660-F	331.55	345.71

Features

- Includes two vertical columns, one upper horizontal structural rod, one lower horizontal weighted rod, fabric scrim insert, and attachment hardware.
- Scrim is a lightweight open weave textile.
- Screens/toppers are non-load bearing.
- Screens/toppers have no acoustical or tackable properties.
- Screens/toppers can be used in off-modular conditions.
- Screens/toppers are shipped unassembled.
- ◆ Available on RUSH.


To Order, Specify:

- 1) Product number.
- 2) Fabric scrim/colorway; FO-NW (New White).
- 3) Trim color for rods.

Specification Tips

- Not recommended for attachment directly to super base panels; use monolithic panels instead.
- Grooved top cap must be separately specified with foundation element.
- **Mounts on center channel of grooved top cap.**
- Cannot be mounted on 2-way, 3-way, 4-way, or end-of-run top cap trim pieces.
- Can span over 3-way or 4-way intersections.
- Separately specified panel attached screen canopies can be mounted to toppers.
- Screens/toppers can be ganged horizontally with separately specified shared kit.
- **Screens/toppers may interfere with variable height covers, in these conditions specify screen one size smaller.**

Translucent — Stand Alone Kit

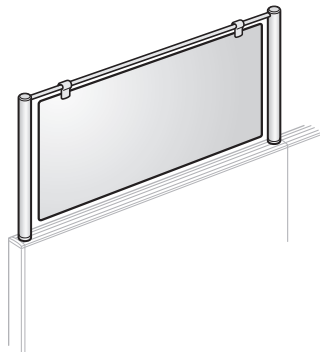

NBPA-X

Height	Width	Number	White A	B	Color/Pattern A	B
16"(406mm)	24"(610mm)	NBPA-1624-X	\$318.55	\$322.09	\$ 593.44	\$ 596.98
	30"(762mm)	NBPA-1630-X	368.11	373.42	692.53	697.84
	36"(914mm)	NBPA-1636-X	417.67	424.75	791.62	798.70
	42"(1067mm)	NBPA-1642-X	467.23	476.08	890.71	899.56
	48"(1219mm)	NBPA-1648-X	516.79	527.41	989.80	1000.42
	54"(1372mm)	NBPA-1654-X	549.83	561.63	1055.86	1067.66
	60"(1524mm)	NBPA-1660-X	615.91	630.07	1187.98	1202.14

Features

- Includes two vertical columns, one upper horizontal structural rod, translucent insert, and attachment hardware; clips.
- Clips are clear.
- Screens/toppers are non-load bearing.
- Screens/toppers have no acoustical or writable properties.
- Screens/toppers can be used in off-modular conditions.
- Screens/toppers are shipped unassembled.

To Order, Specify:

- 1) Product number.
- 2) Translucent color/pattern.
- 3) Trim color for frame.


Specification Tips

- Not recommended for attachment directly to super base panels; use monolithic panels instead.
- Grooved top cap must be separately specified with foundation element.
- **Mounts on center channel of grooved top cap.**
- Cannot be mounted on 2-way, 3-way, 4-way, or end-of-run top cap trim pieces.
- Can span over 3-way or 4-way intersections.
- If desired, grips can be separately specified to prevent back and forth movement of insert.
- Separately specified panel attached screen canopies can be mounted to toppers.
- Screens/toppers can be ganged horizontally with separately specified shared kit.
- **Screens/toppers may interfere with variable height covers, in these conditions specify screen one size smaller.**

Visual Privacy Elements — Panel Attached

Toppers Shared Kits

	Height	Width	Number	Trim A	B
Fabric Scrim — Shared Kit	16"(406mm)	24"(610mm)	NBSP-1624-F	\$133.95	\$136.32
		30"(762mm)	NBSP-1630-F	156.48	160.04
		36"(914mm)	NBSP-1636-F	179.01	183.76
		42"(1067mm)	NBSP-1642-F	201.54	207.48
		48"(1219mm)	NBSP-1648-F	224.07	231.20
		54"(1372mm)	NBSP-1654-F	246.60	254.92
		60"(1524mm)	NBSP-1660-F	269.13	278.64

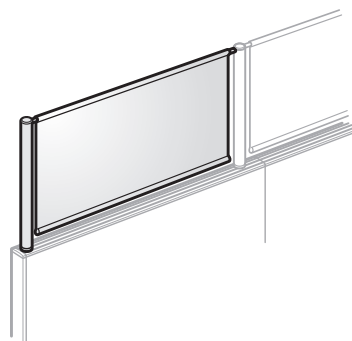

NBSP-F

Features

- Includes one vertical column, one upper horizontal structural rod, one lower horizontal weighted rod, fabric scrim insert, and attachment hardware.
- Scrim is a lightweight open weave textile.
- Screens/toppers are non-load bearing.
- Screens/toppers have no acoustical or tackable properties.
- Screens/toppers can be used in off-modular conditions.
- Screens/toppers are shipped unassembled.

◆ Available on RUSH.


To Order, Specify:

- Product number.
- Fabric scrim/colorway; FO-NW (New White).
- Trim color for frame.

Specification Tips

- Not recommended for attachment directly to super base panels; use monolithic panels instead.
- Grooved top cap must be separately specified with foundation element.
- Mounts on center channel of grooved top cap.**
- Cannot be mounted on 2-way, 3-way, 4-way, or end-of-run top cap trim pieces.
- Can span over 3-way or 4-way intersections.
- Separately specified panel attached screen canopies can be mounted to toppers.
- Use of shared kits will result in 1 1/4"(32mm) reduced overall width per ganged kit.
- Shared kits must be used with a stand alone kit.**
- Toppers may interfere with variable height covers, in these conditions specify topper one size smaller.

Translucent — Shared Kit

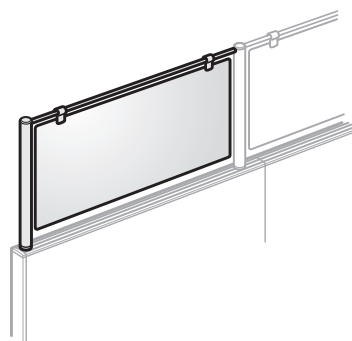

NBSP-X

Height	Width	Number	White		Color/Pattern	
			A	B	A	B
16"(406mm)	24"(610mm)	NBSP-1624-X	\$266.72	\$269.09	\$ 545.30	\$ 547.67
	30"(762mm)	NBSP-1630-X	317.70	321.26	654.35	657.91
	36"(914mm)	NBSP-1636-X	368.68	373.43	763.40	768.15
	42"(1067mm)	NBSP-1642-X	419.66	425.60	872.45	878.39
	48"(1219mm)	NBSP-1648-X	470.64	477.77	981.50	988.63
	54"(1372mm)	NBSP-1654-X	521.62	529.94	1090.55	1098.87
	60"(1524mm)	NBSP-1660-X	572.60	582.11	1199.60	1209.11

Features

- Includes one vertical column, one upper horizontal structural rod, translucent insert, and attachment hardware; clips.
- Clips are clear.
- Screens/toppers are non-load bearing.
- Screens/toppers have no acoustical or writable properties.
- Screens/toppers can be used in off-modular conditions.
- Screens/toppers are shipped unassembled.

To Order, Specify:

- Product number.
- Translucent color/pattern.
- Trim color for frame.


Specification Tips

- Not recommended for attachment directly to super base panels; use monolithic panels instead.
- Grooved top cap must be separately specified with foundation element.
- Mounts on center channel of grooved top cap.**
- Cannot be mounted on 2-way, 3-way, 4-way, or end-of-run top cap trim pieces.
- Can span over 3-way or 4-way intersections.
- If desired, grips can be separately specified to prevent back and forth movement of insert.
- Separately specified panel attached screen canopies can be mounted to toppers.
- Use of shared kits will result in 1 1/4"(32mm) reduced overall width per ganged kit.
- Shared kits must be used with a stand alone kit.**
- Toppers may interfere with variable height covers, in these conditions specify topper one size smaller.

Visual Privacy Elements — Panel Attached

Topper Retrofit Kits

	Number	Price
Support Grips	NBSG-10	\$215.01

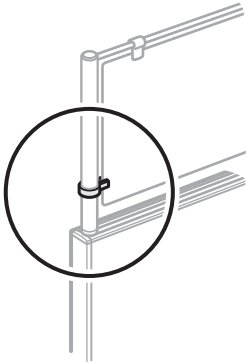

NBSG

Features

- Includes ten support grips with attachment screws.
- Support grips are clear.

Specification Tips

- Attaches to vertical support column to support translucent, desk mounted, and freestanding screens.
- Can be used for panel attached screens to prevent movement of insert.


To Order, Specify:

1) Product number.
(No finish specification required.)

Visual Privacy Elements — Panel Attached

Desk Height Banners

	Height	Width	Coordinating Panel Heights	Number	Trim A	B
Fabric Scrim Insert	34"(867mm)	21"(533mm)	48"(1219mm)	NBBD-3421-F	\$365.73	\$369.10
		27"(686mm)		NBBD-3427-F	442.68	446.39
	39"(991mm)	21"(533mm)	53"(1346mm)	NBBD-3921-F	\$380.78	\$384.75
		27"(686mm)		NBBD-3927-F	457.73	462.04
	50"(1270mm)	21"(533mm)	64"(1626mm)	NBBD-5021-F	\$413.89	\$419.18
		27"(686mm)		NBBD-5027-F	490.84	496.47

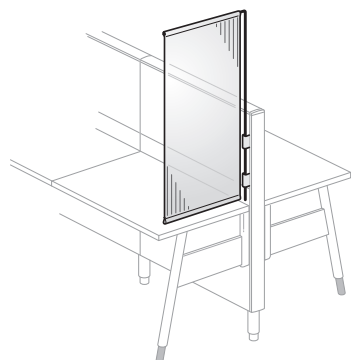

NBBD-F

Features

- Includes frame, fabric scrim insert, one lower horizontal weighted rod, and attachment hardware.
- Scrim is a lightweight open weave textile.
- Banners are non-load bearing.
- Banners have no acoustical or tackable properties.
- Banners are shipped unassembled.


To Order, Specify:

- 1) Product number.
- 2) Fabric scrim/colorway; FO-NW (New White).
- 3) Trim color for frame.

Specification Tips

- To be used on end-of-runs, 2-way and 3-way panel connector conditions. Banners attach to panel connector (full-height or pre-configured) and require field installation.
- Width recommendations:
 - 21"(533mm)-wide banners to be used with 24"(610mm)-deep worksurfaces
 - 27"(686mm)-wide banners to be used with 30"(762mm)-deep worksurfaces
- Recommended worksurface height is 29"(737mm), with the banner being 16"(406mm) above the panel (see coordinating panel heights above).

Translucent Insert

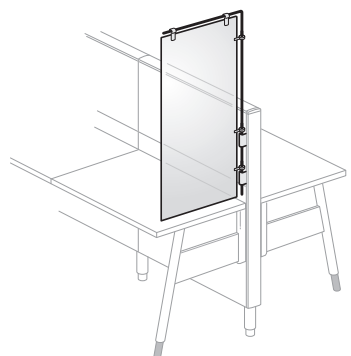

NBBD-X

	Height	Width	Coordinating Panel Heights	Number	White A	B	Color/Pattern A	B
	34"(867mm)	21"(533mm)	48"(1219mm)	NBBD-3421-X	\$ 662.69	\$ 666.06	\$1031.78	\$1035.15
		27"(686mm)		NBBD-3427-X	833.42	837.13	1273.45	1277.16
	39"(991mm)	21"(533mm)	53"(1346mm)	NBBD-3921-X	\$ 731.84	\$ 735.81	\$1110.54	\$1114.51
		27"(686mm)		NBBD-3927-X	902.57	906.88	1352.21	1356.52
	50"(1270mm)	21"(533mm)	64"(1626mm)	NBBD-5021-X	\$ 883.97	\$ 889.26	\$1262.67	\$1267.96
		27"(686mm)		NBBD-5027-X	1054.70	1060.33	1504.34	1509.97

Features

- Includes frame, translucent insert, and attachment hardware; support grips and clips.
- Support grips and clips are clear.
- Banners are non-load bearing.
- Banners have no acoustical or writable properties.
- Banners are shipped unassembled.

To Order, Specify:

- 1) Product number.
- 2) Translucent color/pattern.
- 3) Trim color for frame.


Specification Tips

- To be used on end-of-runs, 2-way and 3-way panel connector conditions. Banners attach to panel connector (full-height or pre-configured) and require field installation.
- Width recommendations:
 - 21"(533mm)-wide banners to be used with 24"(610mm)-deep worksurfaces
 - 27"(686mm)-wide banners to be used with 30"(762mm)-deep worksurfaces
- Recommended worksurface height is 29"(737mm), with the banner being 16"(406mm) above the panel (see coordinating panel height above).

Visual Privacy Elements — Panel Attached

Floor Height Banners

	Height	Width	Coordinating Panel Heights	Number	Trim A	B
Fabric Scrim	57"(1448mm)	15"(381mm)	48"(1219mm)	NBBF-5715-F	\$462.34	\$464.75
		21"(533mm)		NBBF-5721-F	498.74	501.75
	62"(1575mm)	15"(381mm)	53"(1346mm)	NBBF-6215-F	\$479.19	\$483.15
		21"(6533m)		NBBF-6221-F	515.59	520.15
	73"(1854mm)	15"(381mm)	64"(1626mm)	NBBF-7315-F	\$516.26	\$523.63
		21"(533mm)		NBBF-7321-F	552.66	560.63



NBBF-F

Features

- Includes frame, fabric scrim insert, one lower horizontal weighted rod, and attachment hardware.
- Scrim is a lightweight open weave textile.
- Banners are non-load bearing.
- Banners have no acoustical or tackable properties.
- Banners are shipped unassembled.


To Order, Specify:

- 1) Product number.
- 2) Fabric scrim/colorway; FO-NW (New White).
- 3) Trim color for frame.

Specification Tips

- To be used on end-of-runs, 2-way and 3-way panel connector conditions. Banners attach to panel connector and require field installation.
- Width recommendations:
 - 15"(381mm)-wide banners to be used with 18"(457mm)-deep storage
 - 21"(533mm)-wide banners to be used with 24"(610mm)-deep storage or 24"/30"(610mm/762mm)-deep worksurfaces
- Banners are 6 3/4"(171mm) above the floor at raceway height.
- Banners extend 16"(406mm) above the panel (see coordinating panel heights above).

Translucent



NBBF-X

	Height	Width	Coordinating Panel Heights	Number	White A	B	Color/Pattern A	B
Translucent	57"(1448mm)	15"(381mm)	48"(1219mm)	NBBF-5715-X	\$ 943.24	\$ 945.65	\$1329.16	\$1331.57
		21"(533mm)		NBBF-5721-X	1001.49	1004.50	1748.09	1751.10
	62"(1575mm)	15"(381mm)	53"(1346mm)	NBBF-6215-X	\$ 970.99	\$ 974.95	\$1537.26	\$1541.22
		21"(533mm)		NBBF-6221-X	1029.24	1033.80	1956.19	1960.75
	73"(1854mm)	15"(381mm)	64"(1626mm)	NBBF-7315-X	\$1032.04	\$1039.41	\$1995.08	\$2002.45
		21"(533mm)		NBBF-7321-X	1090.29	1098.26	2414.01	2421.98

Features

- Includes frame, translucent insert, and attachment hardware; support grips and clips.
- Support grips and clips are clear.
- Banners are non-load bearing.
- Banners have no acoustical or writable properties.
- Banners are shipped unassembled.

To Order, Specify:

- 1) Product number.
- 2) Translucent color/pattern.
- 3) Trim color for frame.

Specification Tips

- To be used on end-of-runs, 2-way and 3-way panel connector conditions. Banners attach to panel connector and require field installation.
- Width recommendations:
 - 15"(381mm)-wide banners to be used with 18"(457mm)-deep storage
 - 21"(533mm)-wide banners to be used with 24"(610mm)-deep storage or 24"/30"(610mm/762mm)-deep worksurfaces
- Banners are 6 3/4"(171mm) above the floor at raceway height.
- Banners extend 16"(406mm) above the panel (see coordinating panel heights above).

Visual Privacy Elements — Panel Attached

Canopies

	Height	Depth	Width	Number	Trim A	B
Canopy — Top Cap Mount	23"(584mm)	20"(508mm)	36"(914mm)	NBCP-1636	\$397.34	\$401.39
			42"(1067mm)	NBCP-1642	449.18	453.57
			48"(1219mm)	NBCP-1648	501.02	505.75



NBCP

Features

- Includes frame, one upper horizontal tube, one lower horizontal rod, two 2 1/2"(64mm) vertical columns, fabric scrim insert, and attachment hardware.
- Scrim is a lightweight open weave textile.
- Canopies are non-load bearing.
- Provides visual barrier in an open environment.
- Canopies can be used in off-modular conditions.
- Canopies are shipped unassembled.

■ Available on RUSH.

To Order, Specify:

- 1) Product number.
- 2) Fabric scrim/colorway; FO-NW (New White).
- 3) Trim color for frame.

Specification Tips

- Grooved top cap must be separately specified with foundation element.
- Mounts on center channel of grooved top cap.
- Cannot be mounted on 2-way, 3-way, 4-way, or end-of-run top cap trim pieces.
- Can span over 3-way or 4-way intersections.
- For back-to-back applications, see the double top cap canopy.
- Recommended to be used with 48"(1219mm) and 53"(1346mm) high panels.

**Double Canopy —
Double Top Cap Mount**

	23"(584mm)	40"(1016mm)	36"(914mm)	NBDP-1636	\$ 886.82	\$ 890.87
			42"(1067mm)	NBDP-1642	990.50	994.89
			48"(1219mm)	NBDP-1648	1094.18	1098.91



NBDP

Features

- Includes frame, two upper horizontal tubes, one lower horizontal rod, two 2 1/2"(64mm) vertical columns, fabric scrim insert, and attachment hardware.
- Scrim is a lightweight open weave textile.
- Canopies are non-load bearing.
- Provides visual barrier in an open environment.
- Canopies can be used in off-modular conditions.
- Canopies are shipped unassembled.

Specification Tips

- Grooved top cap must be separately specified with foundation element.
- Mounts on center channel of grooved top cap.
- Cannot be mounted on 2-way, 3-way, 4-way, or end-of-run top cap trim pieces.
- Can span over 3-way or 4-way intersections.
- Recommended to be used with 48"(1219mm) and 53"(1346mm) high panels.

To Order, Specify:

- 1) Product number.
- 2) Fabric scrim/colorway; FO-NW (New White).
- 3) Trim color for frame.

Canopy — Topper Mount

	36"(914mm)	20"(508mm)	36"(914mm)	NBAC-1636	\$397.34	\$401.39
			42"(1067mm)	NBAC-1642	449.18	453.57
			48"(1219mm)	NBAC-1648	501.02	505.75



NBAC

Features

- Includes frame, one upper horizontal tube, one lower horizontal rod, fabric scrim insert, and canopy cap.
- Scrim is a lightweight open weave textile.
- Canopies are non-load bearing.
- Provides visual barrier in an open environment.
- Canopies are shipped unassembled.

Specification Tips

- Must be used with separately specified panel attached screens/toppers.
- Cannot be used in back-to-back applications.
- 36"(914mm) is the overall installed height when canopy is on top of the topper.
- Recommended to be used with 32"(813mm) and 42"(1067mm) high panels.


To Order, Specify:

- 1) Product number.
- 2) Fabric scrim/colorway; FO-NW (New White).
- 3) Trim color for frame.

Visual Privacy Elements — Worktop Mounted Screens

Stand Alone Kits without Modesty

	Height	Width	Number	Trim A	B
Fabric Scrim — Stand Alone Kit	19"(483mm)	24"(610mm)	NBDM-1924-F	\$205.08	\$229.35
		30"(762mm)	NBDM-1930-F	236.63	261.15
		36"(914mm)	NBDM-1936-F	268.18	292.70
		42"(1067mm)	NBDM-1942-F	299.73	324.25
		48"(1219mm)	NBDM-1948-F	331.28	355.80
		54"(1372mm)	NBDM-1954-F	362.83	387.35
		60"(1524mm)	NBDM-1960-F	394.38	418.90



NBDM-F

Features

- Includes two vertical columns, one upper horizontal structural rod, one lower horizontal weighted rod, fabric scrim insert, and attachment hardware.
- Scrim is a lightweight open weave textile.
- Screens are non-load bearing.
- Screens have no acoustical or tackable properties.
- Screens are shipped unassembled.
- ◆ Available on RUSH.


To Order, Specify:

- 1) Product number.
- 2) Fabric scrim/colorway; FO-NW (New White).
- 3) Trim color for frame.

Specification Tips

- Mounts to underside of worktop.
- Brackets add dimension to worktop depth.
- Separately specified worktop mounted screen canopies can be mounted to screens.
- Tri Tables are predrilled for recommended worktop screen widths.
- Recommended screen width is 12"(305mm) less than worktop width.
- Screens can be mounted on 1 1/4"(32mm) thick straight edge worktops. Requires field drilling for installation.

Translucent — Stand Alone Kit



NBDM-X

Height	Width	Number	White		Color/Pattern	
			A	B	A	B
19"(483mm)	24"(610mm)	NBDM-1924-X	\$463.55	\$487.82	\$1098.20	\$1122.47
	30"(762mm)	NBDM-1930-X	521.80	546.32	1235.32	1259.84
	36"(914mm)	NBDM-1936-X	580.05	604.57	1372.44	1396.96
	42"(1067mm)	NBDM-1942-X	638.30	662.82	1509.56	1534.08
	48"(1219mm)	NBDM-1948-X	696.55	721.07	1646.68	1671.20
	54"(1372mm)	NBDM-1954-X	754.80	779.32	1783.80	1808.32
	60"(1524mm)	NBDM-1960-X	813.05	837.57	1920.92	1945.44

Features

- Includes two vertical columns, one upper horizontal structural rod, translucent insert, and attachment hardware; support grips and clips.
- Support grips and clips are clear.
- Screens are non-load bearing.
- Screens have no acoustical or writable properties.
- Screens are shipped unassembled.

To Order, Specify:

- 1) Product number.
- 2) Translucent color/pattern.
- 3) Trim color for frame.


Specification Tips

- Mounts to underside of worktop.
- Brackets add dimension to worktop depth.
- Separately specified worktop mounted screen canopies can be mounted to screens.
- Tri Tables are predrilled for recommended worktop screen widths.
- Recommended screen width is 12"(305mm) less than worktop width.
- Screens can be mounted on 1 1/4"(32mm) thick straight edge worktops. Requires field drilling for installation.

Visual Privacy Elements — Worktop Mounted Screens

Stand Alone Kits without Modesty

Markerboard — Stand Alone Kit



NBDM-M

Height	Width	Number	Trim A	B
19"(483mm)	24"(610mm)	NBDM-1924-M	\$433.21	\$457.48
	30"(762mm)	NBDM-1930-M	475.68	500.20
	36"(914mm)	NBDM-1936-M	518.15	542.67
	42"(1067mm)	NBDM-1942-M	560.62	585.14
	48"(1219mm)	NBDM-1948-M	603.09	627.61
	54"(1372mm)	NBDM-1954-M	645.56	670.08
	60"(1524mm)	NBDM-1960-M	688.03	712.55

Features

- Includes two vertical columns, one upper horizontal structural rod, markerboard insert, attachment hardware, and support grips and clips.
- Markers and erasers not included.
- Support grips and clips are clear.
- Screens are non-load bearing.
- Two-sided acrylic markerboard.
- Screens are shipped unassembled.

To Order, Specify:

- 1) Product number.
- 2) Trim color for frame.


Specification Tips

- Mounts to underside of worktop.
- Brackets add dimension to worktop depth.
- Separately specified worktop mounted screen canopies can be mounted to screens.
- Tri Tables are predrilled for recommended worktop screen widths.
- Recommended screen width is 12"(305mm) less than worktop width.
- Screens can be mounted on 1 1/4"(32mm) thick straight edge worktop. Requires field drilling for installation.
- **The following products are recommended to maintain the markerboard appearance:**
 - Dry erase marker kit (includes holder, six markers and eraser), order part# 7062-8001.
 - Markerboard cleaner and conditioner, order part# 7031-7001.
 - Markerboard spray cleaner, order part# 7031-7002.

Visual Privacy Elements — Worktop Mounted Screens

Stand Alone Kits with Modesty

	Height	Width	Number	Trim A	B
Fabric Scrim — Stand Alone Kit	35"(889mm)	24"(610mm)	NBDM-3524-F	\$257.26	\$281.87
		30"(762mm)	NBDM-3530-F	288.81	313.67
		36"(914mm)	NBDM-3536-F	320.36	345.22
		42"(1067mm)	NBDM-3542-F	351.91	376.77
		48"(1219mm)	NBDM-3548-F	383.46	408.32
		54"(1372mm)	NBDM-3554-F	415.01	439.87
		60"(1524mm)	NBDM-3560-F	446.56	471.42



NBDM-F

Features

- Includes two vertical columns, one upper horizontal structural rod, one lower horizontal weighted rod, fabric scrim insert, and attachment hardware.
- Scrim is a lightweight open weave textile.
- Screens are non-load bearing.
- Screens have no acoustical or tackable properties.
- Screens are shipped unassembled.
- Available on RUSH.


To Order, Specify:

- Product number.
- Fabric scrim/colorway; FO-NW (New White).
- Trim color for frame.

Specification Tips

- Modesty extends 18"(457mm) above worktop and 16"(406mm) below.
- Brackets add dimension to worktop depth.
- Separately specified worktop mounted screen canopies can be mounted to screens.
- Recommended for use with Concentrative Tri Tables.
- Recommended screen width is 12"(305mm) less than worktop width.
- Screens can be mounted on 1 1/4"(32mm) thick straight edge worktops. Requires field drilling for installation.

Translucent — Stand Alone Kit



NBDM-X

	Height	Width	Number	White A	B	Color/Pattern A	B
	35"(889mm)	24"(610mm)	NBDM-3524-X	\$ 609.17	\$ 633.78	\$2167.28	\$2191.89
		30"(762mm)	NBDM-3530-X	730.52	755.38	2367.50	2392.36
		36"(914mm)	NBDM-3536-X	851.87	876.73	3491.18	3516.04
		42"(1067mm)	NBDM-3542-X	973.22	998.08	3691.40	3716.26
		48"(1219mm)	NBDM-3548-X	1094.57	1119.43	3891.62	3916.48
		54"(1372mm)	NBDM-3554-X	1215.92	1240.78	5015.30	5040.16
		60"(1524mm)	NBDM-3560-X	1337.27	1362.13	5215.52	5240.38

Features

- Includes two vertical columns, one upper horizontal structural rod, translucent insert, and attachment hardware; support grips and clips.
- Support grips and clips are clear.
- Screens are non-load bearing.
- Screens have no acoustical or writable properties.
- Screens are shipped unassembled.

To Order, Specify:

- Product number.
- Translucent color/pattern.
- Trim color for frame.


Specification Tips

- Modesty extends 18"(457mm) above worktop and 16"(406mm) below.
- Brackets add dimension to worktop depth.
- Separately specified worktop mounted screen canopies can be mounted to screens.
- Recommended for use with Concentrative Tri Tables.
- Recommended screen width is 12"(305mm) less than worktop width.
- Screens can be mounted on 1 1/4"(32mm) thick straight edge worktops. Requires field drilling for installation.

Visual Privacy Elements — Worktop Mounted Screens

Stand Alone Kits with Modesty

Markerboard — Stand Alone Kit



NBDM-M

Height	Width	Number	Trim A	B
35"(889mm)	24"(610mm)	NBDM-3524-M	\$ 651.63	\$ 676.24
	30"(762mm)	NBDM-3530-M	724.44	749.30
	36"(914mm)	NBDM-3536-M	797.25	822.11
	42"(1067mm)	NBDM-3542-M	870.06	894.92
	48"(1219mm)	NBDM-3548-M	942.87	967.73
	54"(1372mm)	NBDM-3554-M	1015.68	1040.54
	60"(1524mm)	NBDM-3560-M	1088.49	1113.35

Features

- Includes two vertical columns, one upper horizontal structural rod, markerboard insert, attachment hardware, and support grips and clips.
- Markers and erasers not included.
- Support grips and clips are clear.
- Screens are non-load bearing.
- Two-sided acrylic markerboard.
- Screens are shipped unassembled.

To Order, Specify:

- 1) Product number.
- 2) Trim color for frame.

Specification Tips

- Modesty extends 18"(457mm) above worktop and 16"(406mm) below.
- Brackets add dimension to worktop depth.
- Separately specified worktop mounted screen canopies can be mounted to screens.
- Recommended for use with Concentrative Tri Tables.
- Recommended screen width is 12"(305mm) less than worktop width.
- Screens can be mounted on 1 1/4"(32mm) thick straight edge worktops. Requires field drilling for installation.
- **The following products are recommended to maintain the markerboard appearance:**
 - Dry erase marker kit (includes holder, six markers and eraser), order part# 7062-8001.
 - Markerboard cleaner and conditioner, order part# 7031-7001.
 - Markerboard spray cleaner, order part# 7031-7002.

Visual Privacy Elements — Worktop Mounted Screens

Worktop Mounted Canopies

	Height	Depth	Width	Number	Trim A	B
Worktop Mounted Screen Canopy	41"(1041mm)	20"(508mm)	36"(914mm)	NBCD-1936	\$394.97	\$416.00
			42"(1067mm)	NBCD-1942	445.21	466.24
			48"(1219mm)	NBCD-1948	494.29	515.32



Features

- Includes frame, one upper horizontal tube, one lower horizontal rod, fabric scrim insert, and canopy cap.
- Scrim is a lightweight open weave textile.
- Canopies are non-load bearing.
- Provides visual barrier in an open environment.
- Canopies are shipped unassembled.
- ◆ Available on RUSH.

To Order, Specify:

- 1) Product number.
- 2) Fabric scrim/colorway; FO-NW (New White).
- 3) Trim color.


Specification Tip

- Must be used with separately specified worktop mounted screens.

Visual Privacy Elements

Freestanding Screens

	Height	Width	Number	Trim A	B
Fabric Scrim Insert	53"(1346mm)	36"(914mm)	NBFS-5336-F	\$763.06	\$ 785.53
		48"(1219mm)	NBFS-5348-F	889.24	916.21
	64"(1626mm)	36"(914mm)	NBFS-6436-F	\$840.17	\$ 864.89
		48"(1219mm)	NBFS-6448-F	994.39	1023.61

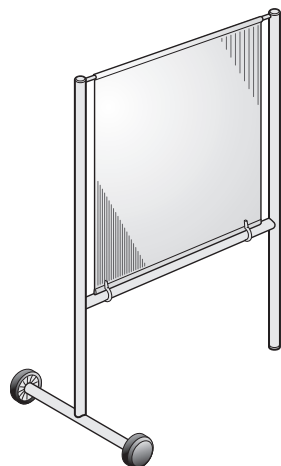

NBFS-F

Features

- Includes frame, fabric scrim insert, and attachment hardware.
- Scrim is a lightweight open weave textile.
- Attachment hardware is clear.
- 4"(102mm) wheels are non-locking. Standard in black finish color only.
- Screens are non-load bearing.
- Screens have no acoustical or tackable properties.
- Screens are shipped unassembled.

◆ Available on RUSH.


To Order, Specify:

- 1) Product number.
- 2) Fabric scrim/colorway; FO-NW (New White).
- 3) Trim color for frame.

Specification Tips

- 20"(508mm) high freestanding screens have 20"(508mm) wheel span centered on 1 1/4"(32mm) thick frame.
- 64"(1626mm) high freestanding screens have 24"(610mm) wheel span centered on 1 1/4"(32mm) thick frame.
- Clearance height is 17 3/8"(441mm).

Translucent Insert

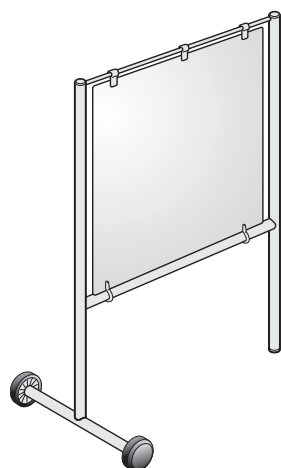

NBFS-X

Height	Width	Number	White A	B	Color/Pattern A	B
53"(1346mm)	36"(914mm)	NBFS-5336-X	\$1195.42	\$1217.89	\$1419.78	\$1442.25
	48"(1219mm)	NBFS-5348-X	1395.22	1422.19	1787.88	1814.85
64"(1626mm)	36"(914mm)	NBFS-6436-X	\$1317.52	\$1342.24	\$1644.73	\$1669.45
	48"(1219mm)	NBFS-6448-X	1561.72	1590.94	2094.63	2123.85

Features

- Includes frame, translucent insert, and attachment hardware.
- Attachment hardware is clear.
- 4"(102mm) wheels are non-locking. Standard in black finish color only.
- Screens are non-load bearing.
- Screens have no acoustical or writable properties.
- Screens are shipped unassembled.

◆ Available on RUSH.

To Order, Specify:

- 1) Product number.
- 2) Translucent color/pattern.
- 3) Trim color for frame.


Specification Tips

- 20"(508mm) high freestanding screens have 20"(508mm) wheel span centered on 1 1/4"(32mm) thick frame.
- 64"(1626mm) high freestanding screens have 24"(610mm) wheel span centered on 1 1/4"(32mm) thick frame.
- Clearance height is 17 3/8"(441mm).

Visual Privacy Elements

Freestanding Screen

	Height	Width	Number	Trim A	B
Markerboard Insert	53"(1346mm)	36"(914mm)	NBFS-5336-M	\$1076.23	\$1098.70
		48"(1219mm)	NBFS-5348-M	1307.53	1334.50
	64"(1626mm)	36"(914mm)	NBFS-6436-M	\$1217.58	\$1242.30
		48"(1219mm)	NBFS-6448-M	1500.28	1529.50

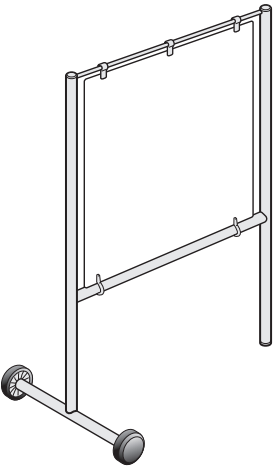

NBFS-M

Features

- Includes frame, markerboard insert, and attachment hardware.
- Markers and erasers not included.
- Attachment hardware is clear.
- 4"(102mm) wheels are non-locking. Standard in black finish color only.
- Screens are non-load bearing.
- Two-sided acrylic markerboard.
- Screens are shipped unassembled.
- ◆ Available on RUSH.

To Order, Specify:

- 1) Product number.
- 2) Trim color for frame.


Specification Tips

- 20"(508mm) high freestanding screens have 20"(508mm) wheel span centered on 1 1/4"(32mm) thick frame.
- 64"(1626mm) high freestanding screens have 24"(610mm) wheel span centered on 1 1/4"(32mm) thick frame.
- Clearance height is 17 3/8"(441mm).
- **The following products are recommended to maintain the markerboard appearance:**
 - Dry erase marker kit (includes holder, six markers and eraser), order part# 7062-8001.
 - Markerboard cleaner and conditioner, order part# 7031-7001.
 - Markerboard spray cleaner, order part# 7031-7002.

Visual Privacy Elements — Screens

Freestanding

Perforated Metal Insert



BBF-PB

Height	Width	Number	Trims A/A	A/B	B/B	B/A
47"(1194mm)	36"(914mm)	BBF-4736-PB	\$1096.77	\$1109.60	\$1127.68	\$1114.85
	48"(1219mm)	BBF-4748-PB	1287.79	1300.62	1319.28	1306.45
52"(1321mm)	36"(914mm)	BBF-5236-PB	\$1137.87	\$1150.70	\$1170.23	\$1157.40
	48"(1219mm)	BBF-5248-PB	1328.89	1341.72	1361.83	1349.00
63"(1600mm)	36"(914mm)	BBF-6336-PB	\$1228.29	\$1241.12	\$1263.84	\$1251.01
	48"(1219mm)	BBF-6348-PB	1419.31	1432.14	1455.44	1442.61


Feature

- Includes screen, two O-rings, two T-Leg bases with two non-locking casters and two locking casters.

To Order, Specify:

- Product number.
- Trim color for frame.
- Trim color for perforated metal insert.
- Metallic trim color for feet and casters.

Frosted Insert



BBF-AC

Height	Width	Number	Trim A	B
47"(1194mm)	36"(914mm)	BBF-4736-AC	\$ 967.63	\$ 985.71
	48"(1219mm)	BBF-4748-AC	1158.65	1177.31
52"(1321mm)	36"(914mm)	BBF-5236-AC	\$1008.73	\$1028.26
	48"(1219mm)	BBF-5248-AC	1199.75	1219.86
63"(1600mm)	36"(914mm)	BBF-6336-AC	\$1099.15	\$1121.87
	48"(1219mm)	BBF-6348-AC	1290.17	1313.47

Feature

- Includes screen, two O-rings, two T-Leg bases with two non-locking casters and two locking casters.

To Order, Specify:

- Product number.
- Trim color for frame.
- Metallic trim color for feet and casters.

Common Features

- O-ring accommodates joining of same height screens.
- T-Legs are Metallic trim color.
- Fabric and Metallic perforated metal screens have no acoustical or tackable value.
- Screens are non-load bearing.
- Magnets can be used with perforated metal insert.
- Frosted insert is identical to frosted and textured acrylic material used in desktop screens.
- T-Leg shipped unassembled.


Specification Tips

- No limit to number of same height screens ganged together.
- 19"(483mm) T-Leg centered on 1 1/8"(29mm) thick frame.
- To fold ganged screens, refer to Specification Guide.

Visual Privacy Elements — Screens

Freestanding

	Height	Width	Number	Trim A	B
Markerboard / Frosted Insert	47"(1194mm)	36"(914mm)	BBF-4736-MC	\$1253.56	\$1271.64
		48"(1219mm)	BBF-4748-MC	1444.58	1463.24
	52"(1321mm)	36"(914mm)	BBF-5236-MC	\$1294.66	\$1314.19
		48"(1219mm)	BBF-5248-MC	1485.68	1505.79
	63"(1600mm)	36"(914mm)	BBF-6336-MC	\$1385.08	\$1407.80
		48"(1219mm)	BBF-6348-MC	1576.10	1599.40




BBF-MC

To Order, Specify:

- 1) Product number.
- 2) Trim color for frame.
- 3) Metallic trim color for feet and casters.

Markerboard / Perforated Metal Insert



BBF-MB

Height	Width	Number	Trims A/A	A/B	B/B	B/A
47"(1194mm)	36"(914mm)	BBF-4736-MB	\$1382.70	\$1395.53	\$1413.61	\$1400.78
	48"(1219mm)	BBF-4748-MB	1573.72	1586.55	1605.21	1592.38
52"(1321mm)	36"(914mm)	BBF-5236-MB	\$1423.80	\$1436.63	\$1456.16	\$1443.33
	48"(1219mm)	BBF-5248-MB	1614.82	1627.65	1647.76	1634.93
63"(1600mm)	36"(914mm)	BBF-6336-MB	\$1514.22	\$1527.05	\$1549.77	\$1536.94
	48"(1219mm)	BBF-6348-MB	1705.24	1718.07	1741.37	1728.54

Features

- Includes screen, two O-rings, two T-Leg bases with 2 non-locking casters and 2 locking casters.
- Mobile freestanding screen has two-sided markerboard on top with fabric or frosted or perforated metal insert on the bottom.
- Markers and erasers not included.
- O-ring accommodates joining of same height screens.
- T-Legs are Metallic trim color.
- Magnets can be used with perforated metal inserts.
- Perforated metal insert screen has no acoustical or tackable value.
- Screens are non-load bearing.
- 19"(438mm) T-Leg centered on 1 1/8"(29mm) thick frame.
- Frosted insert is identical to frosted and textured acrylic material used in desktop screens.
- T-Legs shipped unassembled.

To Order, Specify:

- 1) Product number.
- 2) Trim color for frame.
- 3) Trim color for perforated metal insert.
- 4) Metallic trim color for feet and casters.


Specification Tips

- No limit to number of same height screens ganged together.
- Fabric screen insert available in warm and cool neutral only.
- Screens cannot be folded together.
- See Specification Guide for additional information.
- **The following products are recommended to maintain the markerboard appearance:**
 - Dry erase marker kit (includes holder, six markers and eraser), order part# 7062-8001.
 - Markerboard cleaner and conditioner, order part# 7031-7001.
 - Markerboard spray cleaner, order part# 7031-7002.

PREMISE 3-Circuit – Electrical Components

Power Feed Modules — base raceway power application

	Feed Length	Number	Price
Base Feed Module – Hardwire Connection — 3-Circuit	48"(1219mm)	NEBF-1	\$313.73
	72"(1829mm)	NEBF-0006	371.05
	120"(3048mm)	NEBF-0010	485.69
	180"(4572mm)	NEBF-0015	628.99
	300"(7620mm)	NEBF-0025	915.59



NEBF-1



Features

- Includes one base feed with black 1/2"(13mm) flexible metal conduit with eight 12-gauge wires for up to three 20-amp circuits of power.
- For floor, column, or wall hardwire connections.
- For use with panels equipped with 3-circuit power components.
- Base feed module can be field modified to accommodate left or right hand conditions.
- Attaches at any one of the four receptacle sites in a powered base raceway of a monolithic or super base panel.
- Standard in charcoal trim color only.
- ◆ Available on RUSH.


To Order, Specify:

- 1) Product number.
(No finish specification required.)


Specification Tips

- Not for use with open base raceway panel applications.
- Not for use with power sources other than 120 volt 60 hertz.
- Do not mix 3-circuit with 4-circuit components. Do not mix 2+2 and 3+1 components. Components have unique polarity key and color coding (3-circuit=black, 2+2=blue and 3+1=green).

Single Circuit Base Feed Module – Receptacle Connection with Power Cord — 3-Circuit



NEB-2



2'(610mm) (USA Only)

NEB-2

\$262.14

Features

- Includes a single circuit power connector, 2'(610mm) cord and 20 amp plug (NEMA 5-20P).
- For use with panels equipped with 3-circuit power components.
- Requires a 20 amp, 125 volt power receptacle (NEMA 5-20R) for plug-in (not included).
- Provides power to circuit #1 only.
- Attaches at any of the four receptacle sites in a powered base raceway of a monolithic or super base panel.
- Standard in charcoal trim color only.
- ◆ Available on RUSH.

To Order, Specify:

- 1) Product number.
(No finish specification required.)

Specification Tips


- **Not for use in Canada due to electrical code restrictions.**
- **Not for use with isolated ground receptacles.**
- Not for use with open base raceway panel applications.
- Not for use with power sources other than 120 volt 60 hertz.
- Do not mix 3-circuit with 4-circuit components. Do not mix 2+2 and 3+1 components. Components have unique polarity key and color coding (3-circuit=black, 2+2=blue and 3+1=green).

PREMISE 3-Circuit – Electrical Components

Power Feed Modules — base raceway power application

	Feed Length	Number	Price
Single Circuit Base Feed Module – Receptacle Connection with Power Cord — 3-Circuit	6'(1829mm) (Canada Only)	NEB-2-A	\$330.92

Single Circuit Base Feed Module – Receptacle Connection with Power Cord — 3-Circuit



NEB-2-A
Class FA –
SIN 711-1,
Discount Group XI



Features

- Includes one circuit power connector, 6'(1829mm) cord and 15 amp plug (NEMA 5-15P).
- For use with panels equipped with 3-circuit power components.
- Requires a 15 amp, 125 volt power receptacle (NEMA 5-15R) for plug-in (not included).
- Attaches at any of the four receptacle sites in a powered raceway of a monolithic or super base panel.
- Provides power to circuit #1 only.
- Standard in charcoal trim color only.


To Order, Specify:

- 1) Product number.
(No finish specification required.)

Specification Tips

- **Not for use in USA due to electrical code restrictions.**
- **Not for use with isolated ground receptacles.**
- Not for use with open base raceway panel applications.
- Not for use with power sources other than 120 volt 60 hertz.
- Do not mix 3-circuit with 4-circuit components. Do not mix 2+2 and 3+1 components. Components have unique polarity key and color coding (3-circuit=black, 2+2=blue and 3+1=green).

Base Feed Module – Concealed Hardwire Connection — 3-Circuit



NEBF-5
Class FA – SIN 711-1,
Discount Group XI



Number

NEBF-5

Price

\$485.71

Features

- Includes one junction box with modular connector.
- For use with panels equipped with 3-circuit power components.
- For floor, column, or wall hardwire connections.
- Provides eight 12-gauge wires for up to three 20-amp circuits of power.
- Conforms to New York City electrical code.
- Junction box has three 1/2" knockouts.

◆ Available on RUSH.


To Order, Specify:

- 1) Product number.
(No finish specification required.)

Specification Tips

- For installation on panels **no less than 36"(914mm)** wide.
- Connector plugs into receptacle site on left side of panel base.
- Not for use with open base raceway panel applications.
- Not for use with power sources other than 120 volt 60 hertz.
- Conduit and fittings for connection between building and junction box are supplied by local electricians.
- Do not mix 3-circuit with 4-circuit components. Do not mix 2+2 and 3+1 components. Components have unique polarity key and color coding (3-circuit=black, 2+2=blue and 3+1=green).

Raised Floor Infeed Base Feed Module — 3-Circuit



ENEJ-0048-3WF
Class SP – SIN 711-1,
Discount Group XVI



Feed Length

4'(1219mm)

Number

ENEJ-0048-3WF

Price

\$225.53

Features

- Includes connector assembly which consists of one Power Base connector head, 1/2"(13mm) black flexible metal conduit and one Power Base AI connector and a two port splitter.
- Constructed with eight 12-gauge wires for up to three 20-amp circuits of power.
- For use with 3-circuit power components.
- Attaches at any one of the four receptacle sites in a powered base raceway of a panel and to a Power Base AI underfloor power system or a Power Base AI Wall Feed.
- Base feed module can be field modified to accommodate left or right conditions.
- Connector has integral latching system.
- Power Base Connector is color coded black and has a polarity key system which prevents misconnection between 3- or 4-circuit connectors.
- UL listed Manufactured wiring system rated for 20-amp 120V/208Y or 120/240V 60 Hz and for use in "other air handling spaces" per the NEC Article 604.
- Standard in charcoal trim color only.

To Order, Specify:

- 1) Product number.
(No finish specification required.)


Specification Tips

- Male Power Base AI connector can plug directly into a zone distribution box, circuit distributor, flush floor box connectors, or wall feed.
- Male Power Base AI connector cannot connect directly to infeed or jumper. Use included circuit distributor to connect to jumper or infeed harness.
- Not for power sources other than 120 volt 60 hertz.

PREMISE 3-Circuit – Electrical Components

Power Feed Modules — base raceway power application

	Description	Number	Price
System Furniture Power Interface Jumper — 3-Circuit	64"(1626mm) Infeed Connector	EUEJ-0064-3WF	\$165.49
	102"(2591mm)	EUEJ-0102-3WF	191.28
	144"(3658mm)	EUEJ-0144-3WF	229.97
	300"(7620mm)	EUEJ-0300-3WF	549.16

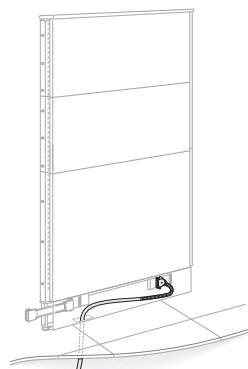

EUEJ-3WF



Features

- Includes connector assembly which consists of one Power Base connector head, 1/2"(13mm) (unpainted) flexible metal conduit and one Power Base AI connector and a two port splitter.
- Constructed with eight 12-gauge wires for up to three 20-amp circuits of power.
- For use with 3-circuit power components.
- Attaches at any one of the four receptacle sites in a powered base raceway of a panel and to a Power Base AI underfloor power system.
- Connector has integral latching system.
- Power Base Connector is color coded black and has a polarity key system which prevents misconnection between 3- or 4-circuit connectors.
- UL listed Manufactured wiring system rated for 20-amp 120V/208Y or 120/240V 60 Hz and for use in "other air handling spaces" per the NEC Article 604.


To Order, Specify:

- Product number.
(No finish specification required.)

Specification Tips

- Male Power Base AI connector can plug directly into a zone distribution box, circuit distributor, or flush floor box connectors.
- Male Power Base AI connector cannot connect directly to infeed or jumper. Use included circuit distributor to connect to jumper or infeed harness.
- Not for power sources other than 120 volt 60 hertz.
- Excess length can be coiled under the floor.
- With field modification of the raceway cover the infeed may be routed under panel and into the base raceway for a concealed connection.

Wall Feed Field Wired 1 Port



FBEW



Description	Height	Length	Number	Price
3-circuit	1 1/2"(38.1mm)	4 11/16"(119mm)	FBEW-0004-31	\$71.44

Features

- Includes 4 11/16"(119mm) junction box cover with one female modular power connector.
- For use with Raised Floor Infeed Base Feed Module and Systems Furniture Power Interface Jumper.
- For use with field supplied 4 11/16"(119mm) square junction box.
- Connector has integral latching system.
- Connectors are color coded and have a polarity key system which prevents misconnection between 3- and 4-circuit connectors.
- UL listed Manufactured wiring system rated for 20-amp 120V/208Y or 120/240V 60 Hz and for use in "other air handling spaces" per the NEC Article 604.

To Order, Specify:

- Product number.
(No finish specification required.)


Specification Tip

- Provides transition from building power to modular power distribution system. May be used with junction box in wall or column.

PREMISE 3-Circuit – Electrical Components

Power Feed Modules — top feed power application

	Panel Height	Pole Length	Number	Trim A	B
Monolithic Panel Top Feed Module — 3-Circuit	10' Ceiling Height				
	42"(1067mm) - 53"(1346mm)	95"(2413mm)	NETM-5300-3T	\$905.40	\$1035.22
	64"(1626mm) - 80"(2032mm)	66"(1676mm)	NETM-8000-3T	857.34	955.03
	12' Ceiling Height				
	42"(1067mm) - 53"(1346mm)	119"(3023mm)	NETM-5300-3W	\$935.21	\$1093.59
	64"(1626mm) - 80"(2032mm)	95"(2413mm)	NETM-8000-3W	887.15	1013.40

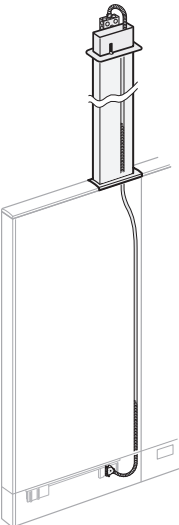

NETM-3T
NETM-3W



- Features**
 - Includes one electrical harness in metal conduit, electrical box, ceiling bezel plate, pole and hardware.
 - Wire harness not included. Intended for field supplied conduit and wire applications only.
 - For connection to the electrical source located in space above a drop ceiling.
 - For use with panels equipped with 3-circuit power components.
 - Electrical harness contained in metal conduit allows for adjacent routing of communication cabling within the pole.
 - For routing and cabling capacities see Specification Guide.
 - Removable cover on poles provides access to pathway.
 - Provides eight 12-gauge wires for up to three 20-amp circuits of power.
 - Routes power to base raceway.
 - Attaches at any one of the four receptacle sites in a powered base raceway.
- Available on RUSH.

- To Order, Specify:**
- 1) Product number.

2) Trim color.


- Specification Tips**
 - For installation on fabric monolithic panels no less than 24"(610mm) wide.
 - Not for use with glass or open base panels.
 - Can be used with standard, grooved or wood top cap.
 - Mounts 1 1/2"(38mm) from the end of the top cap.
 - Not for use with power sources other than 120 volt 60 hertz.
 - Do not mix 3-circuit with 4-circuit components. Do not mix 2+2 and 3+1 components. Components have unique polarity key and color coding (3-circuit=black, 2+2=blue and 3+1=green).

NOTE: Wire harness length is 180"(4572mm) regardless of pole length.

PREMISE 3-Circuit – Electrical Components


Power Feed Modules — top feed power application

Stackable Panel Top Feed Module — 3-Circuit

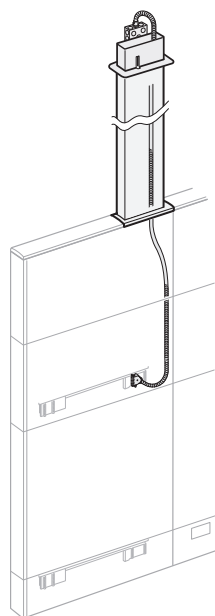

Beltline Connection

NETP-3T
NETP-3W

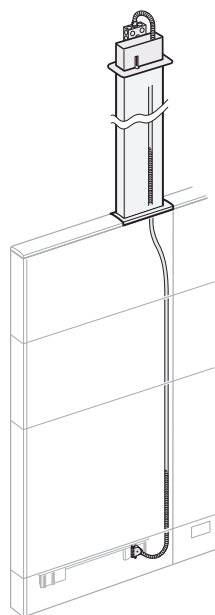

Base Raceway Connection



Panel Height	Pole Length	Number	Trim A	B
10' Ceiling Height				
42"(1067mm) - 48"(1219mm)	95"(2413mm)	NETP-4800-3T ■	\$954.83	\$1090.60
64"(1626mm) - 80"(2032mm)	66"(1676mm)	NETP-8000-3T ■	897.87	995.56
12' Ceiling Height				
42"(1067mm) - 48"(1219mm)	119"(3023mm)	NETP-4800-3W ■	\$984.64	\$1148.97
64"(1626mm) - 80"(2032mm)	95"(2413mm)	NETP-8000-3W ■	927.68	1053.93

Features

- Includes one electrical harness in metal conduit, electrical box, ceiling bezel plate, pole and hardware.
- For connection to the electrical source located in space above a drop ceiling.
- For use with panels equipped with 3-circuit power components.
- Electrical harness contained in metal conduit allows for adjacent routing of communication cabling within the pole.
- For routing and cabling capacities see Specification Guide.
- Removable cover on pole provides access to pathway.
- Provides eight 12-gauge wires for up to three 20-amp circuits of power.
- Mounts to stack kit and routes power and communications cabling from ceiling to the base raceway on a monolithic base or super base panel, beltline, or standing-height on a stack kit.
- Attaches at any one of the four receptacle sites in a powered base raceway.

■ Available on RUSH.

To Order, Specify:

- 1) Product number.
- 2) Trim color.

Specification Tips


- For installation on stack kits mounted above monolithic or super base panels no less than 24"(610mm) wide for base raceway.
- Not for use with glass, translucent, perforated or open stack kits.
- Can be used with standard, grooved or wood top cap.
- Not recommended for use on stack kits with structural crossbars in off-modular applications.
- Mounts to the top cross bar of a stack kit 5 3/8"(93mm) from the end of top cap.
- Not for use with power sources other than 120 volt 60 hertz.
- Do not mix 3-circuit with 4-circuit components. Do not mix 2+2 and 3+1 components. Components have unique polarity key and color coding (3-circuit=black, 2+2=blue and 3+1=green).

NOTE: Wire harness length is 180"(4572mm) regardless of pole length.

PREMISE 3-Circuit – Electrical Components

Power Feed Modules — top feed power application

	Ceiling Height	Number	Price
External Top Feed Module — 3-Circuit	10'(3048mm)	NETX-10-P	\$690.61

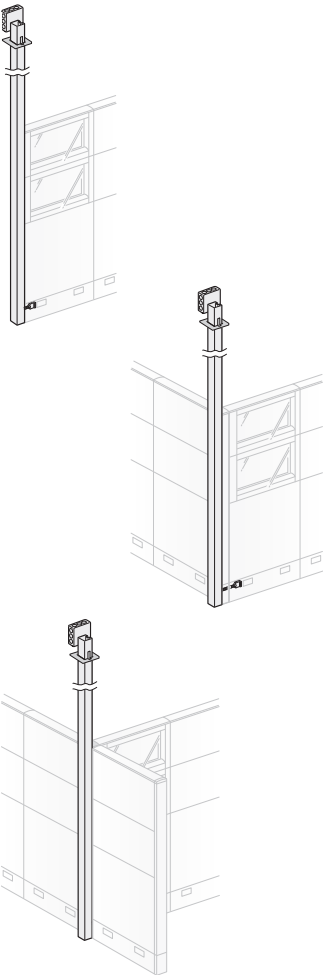

NETX-10-P



Features

- Includes one electrical harness in metal conduit, electrical box, ceiling bezel plate, 3" X 3" pole and hardware.
- For connection to the electrical source located in space above a drop ceiling.
- For use with panels equipped with 3-circuit power components.
- Routes power and communications from the ceiling to the base raceway on any panel configuration including open or glazed stack kits.
- For routing and cabling capacities see Specification Guide.
- Removable cover on poles provides access to pathway.
- Provides eight 12-gauge wires for up to three 20-amp circuits of power.
- Routes power to base raceway.
- Attaches at any one of the four receptacle sites in a powered base raceway.

Specification Tips

- Can be used in end-of-run, 2-way, and 3-way conditions on any panel type.
- 2-and 3-way conditions require additional connector. See Specification Guide for information.
- Can be used with standard, grooved or wood top cap.
- Not for use with power sources other than 120 volt 60 hertz.
- Do not mix 3-circuit with 4-circuit components. Do not mix 2+2 and 3+1 components. Components have unique polarity key and color coding (3-circuit=black, 2+2=blue and 3+1=green).


NOTE: Wire harness length is 180"(4572mm) regardless of pole length.

To Order, Specify:

- 1) Product number.
- 2) Trim color.*

***Note:** Upcharge list for Metallic trim color
Top feed module = **\$44.40.**

**Floor-to-Ceiling Monolithic
and Super Base Panel
Top Feed Module —
3-Circuit**

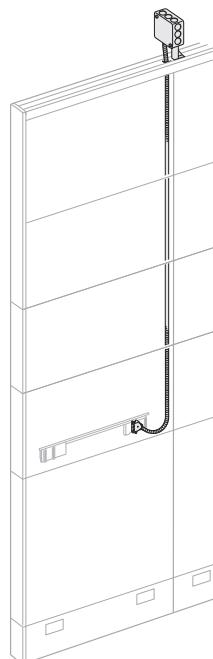


Beltline Connection
NETC-10-P

- Includes one electrical harness in metal conduit, electrical box and hardware.
- Mounts to floor to ceiling track and routes power from the electrical source located in space above drop ceiling to the base raceway on a monolithic or super base panel, beltline or standing-height on stack kit.
- For use with panels equipped with 3-circuit power components.
- Provides eight 12-gauge wires for up to three 20-amp circuits of power.
- Attaches at any of the four receptacle sites in a powered panel.

- For installation on monolithic or super base panels no less than 24"(610mm) wide.
- **Cannot be installed on an open, glazed, translucent or perforated stack kit.**
- Top junction box mounts to the ceiling track.
- Ceiling height cannot exceed 10'(3048mm).
- Not for use with power source other than 120 volt 60 hertz.
- Do not mix 3-circuit with 4-circuit components. Do not mix 2+2 and 3+1 components. Components have unique polarity key and color coding (3-circuit=black, 2+2=blue and 3+1=green).

NOTE: Wire harness length is 180"(4572mm).

1) Product number.
(No finish specification required.)

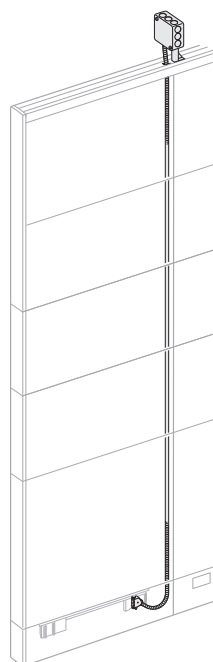


Base Raceway Connection





PREMISE 3-Circuit – Electrical Components

Power Feed Modules — top feed power application

	Length	Number	Price
Infeed Harness — 3-Circuit	15'(4572mm)	VNEH-0000-3 	\$502.16
	30'(9144mm)	VNEH-0030-3	878.95

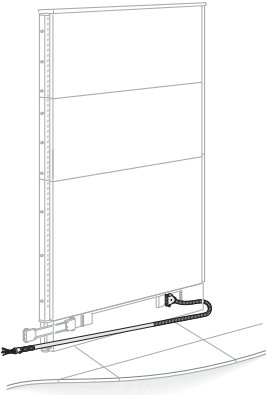


VNEH-3

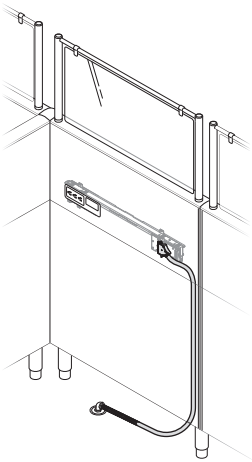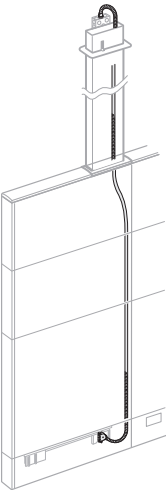

Features

- Includes electrical harness in galvanized metal conduit.
- Can be used to route power from floor to beltline on open or closed base panels. Electrical harness routes through panel side frame rail of monolithic or super base panel.
- Can be used with a powered top feed pole to bring an additional set of three circuits into the workstation cluster. Local electrician to provide secondary junction box at top of top feed pole.
- For use with panels equipped with 3-circuit power components.
- Provides eight 12-gauge wires for up to three 20 amp circuits of power.
- Attaches at any one of the four receptacle sites in a powered panel.

 Available on RUSH.

To Order, Specify:

- 1) Product number.
(No finish specification required.)








Specification Tips

- Not for use with power sources other than 120 volt 60 hertz.
- For applications from floor to beltline where conduit is exposed. Split tubing may be field supplied separately to cover galvanized metal conduit.
- Do not mix 3-circuit with 4-circuit components. Do not mix 2+2 and 3+1 components. Components have unique polarity key and color coding (3-circuit=black, 2+2=blue and 3+1=green).

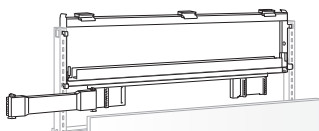

PREMISE 3-Circuit – Electrical Components

Power Kits

	Panel Width	Number	Price
Power Kit for Stack Application — 3-Circuit 	24"(610mm)	NEKA-24-P 	\$556.22
	30"(762mm)	NEKA-30-P 	566.74
	36"(914mm)	NEKA-36-P 	577.26
	42"(1067mm)	NEKA-42-P 	587.78
	48"(1219mm)	NEKA-48-P 	598.30
	60"(1524mm)	NEKA-60-P 	619.34

NEKA-P



Features

- Includes power distribution assembly (PDA), NEF-1 flexible power connector and cable trough, one 3"(76mm) straight cable guide, one 3"(76mm) corner cable guide, cable hangers, cross bar, and mounting hardware.
- Can be used to access power or route power through stack kit at beltline and standing height.
- Standard in charcoal trim color only.

 Available on RUSH.

To Order, Specify:




- 1) Product number.
(No finish specification required.)

Specification Tips

- Flexible power connector provided with power kit will accommodate straight in-line, inside 90° and inside 120° conditions. Refer to NES-1 flexible power connector for other applications.
- To access power, specify triplex receptacles separately for use with power kit.
- To route power through stack kit at beltline and standing height with a separately specified pad.
- Use of separately specified Power Distribution Support Bracket is recommended to stabilize power distribution assembly (PDA).
- **Cannot be used with open, glazed, translucent or perforated pad.**
- 24"(610mm) kit is for routing power through panel only-no power access.
- For 18"(457mm) panels there is neither a power kit nor an extended power connector available to route power at the beltline or standing height. See Specification Guide for alternate options.
- Do not mix 3-circuit with 4-circuit components. Do not mix 2+2 and 3+1 components. Components have unique polarity key and color coding (3-circuit=black, 2+2=blue and 3+1=green).

PREMISE 3-Circuit – Electrical Components

Power Kits

	Panel Width	Number	Price
Stack Application Retrofit Kit – 3-Circuit 	24"(610mm)	NEKB-24-P 	\$290.97
	30"(762mm)	NEKB-30-P 	304.99
	36"(914mm)	NEKB-36-P 	319.01
	42"(1067mm)	NEKB-42-P 	333.03
	48"(1219mm)	NEKB-48-P 	347.05
	60"(1524mm)	NEKB-60-P 	375.09

NEKB-P



Features

- Includes power distribution assembly (PDA), NEF-1 flexible power connector and cable trough, one 3"(76mm) straight cable guide, one 3"(76mm) corner cable guide and cable hangers.
- Can be used to access power or route power through stack kit at beltline and standing height.
- Standard in charcoal trim color only.
- ◆ Available on RUSH.

To Order, Specify:

- 1) Product number.
(No finish specification required.)


Specification Tips

- Flexible power connector provided with power kit will accommodate straight in-line, inside 90° and inside 120° conditions. Refer to NES-1 flexible power connector for other applications.
- To access power, specify triplex receptacles and 10"(254mm) or 16"(406mm) high PREMISE technology pad only for use with power kit.
- To route power through stack kit at beltline and standing height with a separately specified pad.
- Use of separately specified Power Distribution Support Bracket is recommended to stabilize power distribution assembly (PDA).
- **Cannot be used with open, glazed, translucent or perforated pad.**
- 24"(610mm) kit is for routing power through panel only-no power access.
- For 18"(457mm) panels there is neither a power kit nor an extended power connector available to route power at the beltline or standing height. See Specification Guide for alternate options.
- Do not mix 3-circuit with 4-circuit components. Do not mix 2+2 and 3+1 components. Components have unique polarity key and color coding (3-circuit=black, 2+2=blue and 3+1=green).

PREMISE 3-Circuit – Electrical Components

Power Kits

Structural Power Kit for Stack Application — 3-Circuit



NEKS-PS



Panel Width	Number	Price
24"(610mm)	NEKS-24-PS	\$724.50
30"(762mm)	NEKS-30-PS	737.35
36"(914mm)	NEKS-36-PS	750.20
42"(1067mm)	NEKS-42-PS	763.05
48"(1219mm)	NEKS-48-PS	775.90
60"(1524mm)	NEKS-60-PS	801.60

Features

- Includes power distribution assembly (PDA), cable trough, NEF-1 flexible power connector, one 3"(76mm) straight cable guide, one 3"(76mm) corner cable guide, cable hangers, structural cross bar, and mounting hardware.
- Can be used to access power or route power through stack kit at beltline and standing height.
- Standard in charcoal trim color only.

To Order, Specify:


- 1) Product number.
(No finish specification required.)

Specification Tips

- **For power access at work-height a structural cross bar must be used for off-modular overheads.**
- **Only for use with slat technology pads to access work height power.**
- Flexible power connector provided with power kit will accommodate straight in-line, inside 90° and inside 120° conditions. Refer to NES-1 flexible power connector for other applications.
- Not recommended for top feed applications due to structural crossbar.
- To access power, specify triplex receptacles and 16"(406mm) high slat PREMISE technology pad only for use with power kit.
- To route power through stack kit at beltline and standing height with a separately specified off-modular pad.
- Use of separately specified Power Distribution Support Bracket is recommended to stabilize power distribution assembly (PDA).
- **Cannot be used with open, glazed, translucent or perforated pad.**
- 24"(610mm) kit is for routing power through panel only-no power access.
- For 18"(457mm) panels there is neither a power kit nor an extended power connector available to route power at the beltline or standing height. See Specification Guide for alternate options.
- Do not mix 3-circuit with 4-circuit components. Do not mix 2+2 and 3+1 components. Components have unique polarity key and color coding (3-circuit=black, 2+2=blue and 3+1=green).

PREMISE 3-Circuit – Electrical Components

	Length	Number	Price
Super Base Panel-to-Stack Kit Beltline Vertical Power Connector — 3-Circuit	32"(813mm)	NEPH-4	\$205.66

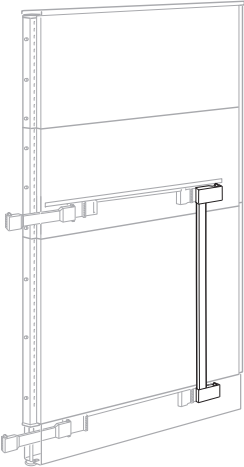

NEPH-4



Features

- Includes one (1) power connector with safety latches for securing vertical power connector to power distribution assembly.
- Transfers power from the base raceway to beltline raceway.
- For use with panels equipped with 3-circuit power components.
- Can be used with either 10"(254mm) or 16"(406mm) powered kit for stack application on super base panel (16"(406mm) shown).
- Standard in charcoal trim color only.
- ◆ Available on RUSH.


To Order, Specify:

- 1) Product number.
(No finish specification required.)

Specification Tips

- The power connectors install on the right side of panel into flex connector locations.
- Blocks access to beltline and base receptacle location.
- **Cannot be used with open stack kits or glazed stack kits.**
- Do not mix 3-circuit with 4-circuit components. Do not mix 2+2 and 3+1 components. Components have unique polarity key and color coding (3-circuit=black, 2+2=blue and 3+1=green).

Super Base Panel-to-Stack Kit Standing Height Vertical Power — 3-Circuit	48"(1219mm)	NEPH-5	\$276.95
--	-------------	--------	----------

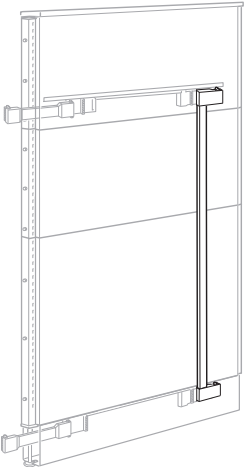

NEPH-5



Features

- Includes one (1) power connector with safety latches for securing vertical power connector to power distribution assembly.
- Transfers power from the base raceway to standing height.
- For use with panels equipped with 3-circuit power components.
- Can be used with 10"(254mm) and 16"(406mm) powered kit for stack application located above a 16"(405mm) stack kit on a super base panel.
- Standard in charcoal trim color only.
- ◆ Available on RUSH.

To Order, Specify:

- 1) Product number.
(No finish specification required.)



Specification Tips

- The power connectors install on right side of panel into flex connector locations.
- Blocks access to standing height and base receptacle location.
- **Cannot be used with open stack kits or glazed stack kits.**
- Do not mix 3-circuit with 4-circuit components. Do not mix 2+2 and 3+1 components. Components have unique polarity key and color coding (3-circuit=black, 2+2=blue and 3+1=green).


PREMISE 3-Circuit – Electrical Components

Horizontal Power Connector — base raceway and beltline power applications



**Flexible Power Connector —
3-Circuit**





Monolithic/Super Base straight condition





Stack Kit straight condition





Monolithic/Super Base inside 90° condition



Stack kit inside 90° condition



Monolithic/Super Base
inside 120° condition



Stack kit inside 120° condition

NEF-1



Length	Number	Price
13 1/4"(337mm)	NEF-1 ◆	\$116.94

Features

- Includes one flexible power connector with safety latches for securing connector to power block.
- Continues electrical circuits between base panels in straight, 90° or 120° conditions, and connected stack kits in an inside 90° or 120° condition.
- For use with panels equipped with 3-circuit power components.
- NEF-1_ flexible power connectors ship with each powered standard or base panel as follows:
 - .95 with 3-circuit power
- Standard in charcoal trim color only.

◆ Available on RUSH.

To Order, Specify:

- 1) Product number.
(No finish specification required.)



Specification Tips

- Cable guides must be used in stack kit applications to protect flexible power connector.
- Do not mix 3-circuit with 4-circuit components. Do not mix 2+2 and 3+1 components. Components have unique polarity key and color coding (3-circuit=black, 2+2=blue and 3+1=green).


PREMISE 3-Circuit – Electrical Components

Horizontal Power Connector — base raceway and beltline power applications


Straight-Span Flexible
Power Connector — 3-Circuit






Monolithic/Super panel three-way or four-way condition



Stack kit three-way or four-way condition



Monolithic/Super panel outside 90° condition



Monolithic/Super panel outside 120° condition

NES-1



Length	Number	Price
16"(406mm)	NES-1	\$116.94

Features

- Includes one straight-span flexible power connector with safety latches for securing connector to power distribution assembly.
- Continues electrical circuits across the three-inch space between powered panels, base panels or stack kits in three-way or four-way conditions, and between powered panels in an outside 90°/120° condition.
- For use with panels equipped with 3-circuit power components.
- Standard in charcoal trim color only.
- ◆ Available on RUSH.

To Order, Specify:

- 1) Product number.
(No finish specification required.)

Specification Tips


- Cable guides must be used in stack kit applications to protect flexible connector.
- Straight span flexible power connector must be separately specified and is not included with panel.
- Do not mix 3-circuit with 4-circuit components. Do not mix 2+2 and 3+1 components. Components have unique polarity key and color coding (3-circuit=black, 2+2=blue and 3+1=green).

PREMISE 3-Circuit – Electrical Components


Horizontal Power Connector — base raceway power applications

Extended Flexible Metal Power Connectors for Base Raceway — 3-Circuit


Straight Condition




90° Condition




120° Condition




(1) 90° Condition




(2) 90° Conditions



3-Way Condition



90° and 3-Way Condition



(2) 90° Conditions

NEJS-18



Panel Width	Length	Number	Price
18"(457mm)	45"(1143mm)	NEJS-18	\$150.19

Features

- Includes one extended flexible metal power connector with safety latches.
- Spans power through **one** non-powered 18"(457mm) wide monolithic or super base panel(s) located between powered panels.
- For use with panels equipped with 3-circuit power components.
- **Specify for use in base raceway only.**
- Extended power connectors cannot be coupled together.
- Standard in charcoal trim with metal conduit.

Specification Tips

- Extended flexible metal power connector must be ordered separately.
- One size connector fits all applications shown.
- Do not mix 3-circuit with 4-circuit components. Do not mix 2+2 and 3+1 components. Components have unique polarity key and color coding (3-circuit=black, 2+2=blue and 3+1=green).


To Order, Specify:

- 1) Product number.
(No finish specification required.)

PREMISE 3-Circuit – Electrical Components

Receptacles

	Description	Circuit Access	Ground Type	Number	Price
Triplex Receptacles – 15 Amp — 3-Circuit	15A Triplex	Circuit 1-3	Common	NER-1 ■	\$224.03
	15A Triplex	Circuit 1-3	Isolated	NER-2 ■	\$241.91



NER-1



Features

- Includes box of six receptacles, each receptacle has three 15 Amp outlets (NEMA 5-15R configuration).
- For use with panels equipped with 3-circuit power components.
- Receptacles are ground type specific.

■ Available on RUSH.



To Order, Specify:

- 1) Product number.
- 2) Trim color (non-metallic trim color only).

Specification Tips

- **Receptacles are field programmable.**
- For power access at any location within the panels with appropriate base raceway covers or technology pad.
- Isolated ground receptacle not for use with single circuit base feed module.
- Do not mix 3-circuit with 4-circuit components. Do not mix 2+2 and 3+1 components. Components have unique polarity key and color coding (3-circuit=black, 2+2=blue and 3+1=green).

Triplex Receptacles – 20 Amp — 3-Circuit	20A Triplex	Circuit 1	Common	VNER-0003-M1	\$656.04
		Circuit 2		VNER-0003-M2	656.04
		Circuit 3		VNER-0003-M3	656.04
	20A Triplex	Circuit 1	Isolated	VNER-0003-I1	\$671.54
		Circuit 2		VNER-0003-I2	671.54
		Circuit 3		VNER-0003-I3	671.54



VNER-0003



Features

- Includes box of six receptacles, each receptacle has three 20 Amp outlets (NEMA 5-20R configuration).
- For use with panels equipped with 3-circuit power components.
- Receptacles are circuit and ground type specific.


To Order, Specify:

- 1) Product number.
- 2) Trim color (non-metallic trim color only).

Specification Tips

- **Receptacles have fixed circuit access and are not field programmable. Specify appropriate number of receptacles for each circuit.**
- For power access at any location within the panels with appropriate base raceway covers or technology pad.
- Isolated ground receptacle not for use with single circuit cord base feed module - receptacle connection with cord feed.
- Do not mix 3-circuit with 4-circuit components. Do not mix 2+2 and 3+1 components. Components have unique polarity key and color coding (3-circuit=black, 2+2=blue and 3+1=green).

Power Break Marker	NEP-1	\$149.58
--------------------	-------	----------



NEP-1

Features

- Includes box of fifty paper labels.
- Use one marker at each power distribution assembly to close the flex connector site wherever an improper electrical connection may occur.
- Features following message: “Do not remove – Power Break – Consult Electrical Plan.”


To Order, Specify:

- 1) Product number.
(No finish specification required.)

PREMISE 3-Circuit – Electrical Components

Power & Communication Port Kit

Power/Communication Port Kit – for use with Monolithic Panel — 3-Circuit

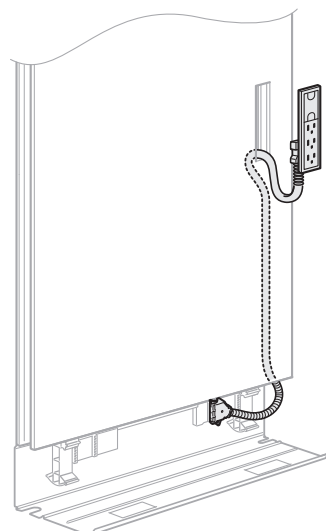

NPCA-2



Height	Width	Installed Height*	Description	Number	Price
9"(229mm)	3 1/4"(83mm)	18"(457mm) to 34"(864mm)	Circuit #1 Common Ground	NPCA-1	\$411.32
			Circuit #2 Common Ground	NPCA-2	411.32
			Circuit #3 Common Ground	NPCA-3	411.32
9"(229mm)	3 1/4"(83mm)	18"(457mm) to 34"(864mm)	Circuit #1 Isolated Ground	NPCA-1-G	\$454.56
			Circuit #2 Isolated Ground	NPCA-2-G	454.56
			Circuit #3 Isolated Ground	NPCA-3-G	454.56

*Installed height measures from the bottom of port kit to bottom of raceway cover.

Features

- Includes edge bracket, bezel, mounting template, circuit-specific harness which connects to base raceway PDA, circuit-specific common or isolated ground triplex receptacle and one modular furniture telecommunications outlet opening [1.38"(25mm) x 2.71"(69mm)] with blank cover.
- For use with panels equipped with 3-circuit power components.
- Flush mounts into surface of fabric monolithic panels to provide electrical and/or communication access at beltline or below standard worksurface height.
- Power connection occupies a receptacle connector location in base raceway.
- Standard in charcoal trim color only.

To Order, Specify:

- 1) Product number.
(No finish specification required.)

Specification Tips

- Beltline height mounting location not available on 32"(813mm) and 42"(1067mm) high monolithic panels.
- Specification of circuit one, two, or three is required.
- Must be installed vertically (communications on top, electrical on bottom).
- May be installed on the left or right side of the panel face.
- Requires field modification of the panel.
- Modular furniture telecommunications outlet must be field supplied.
- Do not mix 3-circuit with 4-circuit components. Do not mix 2+2 and 3+1 components. Components have unique polarity key and color coding (3-circuit=black, 2+2=blue and 3+1=green).

PREMISE 3-Circuit – Electrical Components

Power & Communication Port Kit

	Height	Width	Installed Height*	Description	Number	Price
Power/Communication Port Kit – Back-to-Back – for use with Monolithic Panel — 3-Circuit	9"(229mm)	3 1/4"(83mm)	18"(457mm) to 34"(864mm)	Circuit #1 Common Ground	NPCA-1-B	\$759.55
				Circuit #2 Common Ground	NPCA-2-B	759.55
				Circuit #3 Common Ground	NPCA-3-B	759.55
	9"(229mm)	3 1/4"(83mm)	18"(457mm) to 34"(864mm)	Circuit #1 Isolated Ground	NPCA-1-BG	\$773.58
				Circuit #2 Isolated Ground	NPCA-2-BG	773.58
				Circuit #3 Isolated Ground	NPCA-3-BG	773.58

*Installed height measures from the bottom of port kit to bottom of raceway cover.

Features


- Includes edge brackets, bezels, mounting template, circuit-specific harness which connects to base raceway PDA, circuit-specific common or isolated ground triplex receptacles and two modular furniture telecommunications outlet openings [1.38"(25mm) x 2.71"(69mm)] with blank cover, and one back-to-back jumper.
- For use with panels equipped with 3-circuit power components.
- Flush mounts into surface of fabric monolithic panels to provide electrical and/or communication access at beltline or below standard worksurface height.
- Provides power and/or communication on front and back side of panel directly behind each other.
- Both front and back run off same circuit and grounding method.
- Power connection occupies a receptacle connector location in base raceway.
- Standard in charcoal trim color only.

To Order, Specify:

- 1) Product number.
(No finish specification required.)

Specification Tips

- Beltline height mounting location not available on 32"(813mm) and 42"(1067mm) high monolithic panels.
- Specification of circuit one, two, or three is required.
- Must be installed vertically (communication on top, electrical on bottom).
- May be installed on the left or right side of the panel face.
- Requires field modification of the panel.
- Modular furniture telecommunications outlet must be field supplied.
- Do not mix 3-circuit with 4-circuit components. Do not mix 2+2 and 3+1 components. Components have unique polarity key and color coding (3-circuit=black, 2+2=blue and 3+1=green).

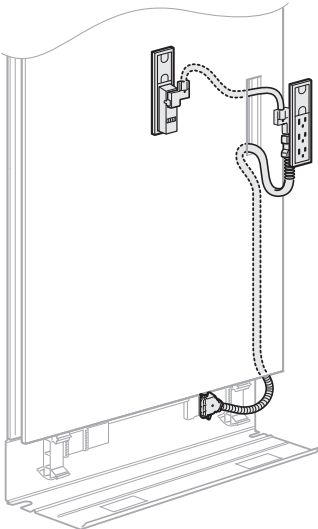








NPCA-B
NPCA-BG



PREMISE 3-Circuit – Electrical Components

Power Kits — base raceway power application


	Height	Panel Width	Number	Trim A	B
Base Raceway Retrofit Kit – Powered — 3-Circuit	6 3/4"(171mm)	24"(610mm)	NEKP-24 	\$327.17	\$335.55
		30"(762mm)	NEKP-30 	334.36	345.14
		36"(914mm)	NEKP-36 	341.55	354.73
		42"(1067mm)	NEKP-42 	348.74	364.32
		48"(1219mm)	NEKP-48 	355.93	373.91
		60"(1524mm)	NEKP-60 	370.31	393.09



NEKP



Features

- Includes one power distribution assembly (PDA), one NEF-1 flexible power connector and one two-sided powered raceway cover.
- Convert non-powered panels to powered panels.
-  Available on RUSH.


To Order, Specify:

- Product number.
- Trim color.


Specification Tips

- Flexible power connectors provided with retrofit kit will accommodate straight in-line or inside 90° or 120° conditions. Refer to NES-1 flexible power connectors for other applications.
- Specify triplex receptacles for use with monolithic panels and super base panels.**
- Do not mix 3-circuit with 4-circuit components. Do not mix 2+2 and 3+1 components. Components have unique polarity key and color coding (3-circuit=black, 2+2=blue and 3+1=green).

Power Distribution Support Bracket



NEAP-1



1917-5502

Description	Number	Price
Monolithic Panel	NEBP-1	\$39.73
Super Base Panel	NEBP-2	32.72

Features


- Includes two brackets.
- Provides support for the Power Distribution Assembly when a stack kit is used above a Super Base or Monolithic panel.
- Attaches to panel below stack kit.
- Standard in galvanized finish only.

To Order, Specify:

- Product number.
(No finish specification required.)

PREMISE Electrical Components

Base Raceway Covers — base raceway power application

	Width	Number	Trim A	B
 NRC-NNNN	18"(457mm)	NRC-18-NNNN	\$28.39	\$30.85
	24"(610mm)	NRC-24-NNNN	33.11	36.79
	30"(762mm)	NRC-30-NNNN	37.83	42.73
	36"(914mm)	NRC-36-NNNN	42.55	48.67
	42"(1067mm)	NRC-42-NNNN	47.27	54.61
	48"(1219mm)	NRC-48-NNNN	51.99	60.55
	60"(1524mm)	NRC-60-NNNN	61.43	72.43


Features

- Includes one plastic raceway cover without cutouts for receptacle access.
- May be provided for field porting if used with communication face plates.

◆ Available on RUSH.

To Order, Specify:

- 1) Product number.
- 2) Trim color.


 NRC-NNPN	24"(610mm)	NRC-24-NNPN	\$44.92	\$48.60
	30"(762mm)	NRC-30-NNPN	49.64	54.54
	36"(914mm)	NRC-36-NNPN	54.36	60.48
	42"(1067mm)	NRC-42-NNPN	59.08	66.42
	48"(1219mm)	NRC-48-NNPN	63.80	72.36
	60"(1524mm)	NRC-60-NNPN	73.24	84.24

Feature

- Includes one plastic raceway cover with receptacle cutouts/covers for power receptacle access on one side.

To Order, Specify:

- 1) Product number.
- 2) Trim color.

 NRC-PNPN	24"(610mm)	NRC-24-PNPN	\$56.73	\$60.41
	30"(762mm)	NRC-30-PNPN	61.45	66.35
	36"(914mm)	NRC-36-PNPN	66.17	72.29
	42"(1067mm)	NRC-42-PNPN	70.89	78.23
	48"(1219mm)	NRC-48-PNPN	75.61	84.17
	60"(1524mm)	NRC-60-PNPN	85.05	96.05


Feature

- Includes one plastic raceway cover with receptacle cutouts/covers for power receptacle access on both sides.

◆ Available on RUSH.

To Order, Specify:

- 1) Product number.
- 2) Trim color.

 NRC-NNPC	30"(762mm)	NRC-30-NNPC	\$61.45	\$66.35
	36"(914mm)	NRC-36-NNPC	66.17	72.29
	42"(1067mm)	NRC-42-NNPC	70.89	78.23
	48"(1219mm)	NRC-48-NNPC	75.61	84.17
	60"(1524mm)	NRC-60-NNPC	85.05	96.05

Feature

- Includes one plastic raceway cover with receptacle cutouts/covers for power and a cutout for a single gang adaptor plate (included) for communication faceplate access on one side.

To Order, Specify:

- 1) Product number.
- 2) Trim color.


Specification Tips

- Punched opening for communication measures 2.25"(57mm) x 3.75"(95mm).
- Inside opening of adaptor plate measures 2.00"(51mm) x 2.81"(75mm).
- Specify when no raceway cover is ordered with a foundation element (no raceway cover option).

PREMISE Electrical Components

Base Raceway Covers — base raceway power application

	Width	Number	Trim A	B
Raceway Cover with Power and Single Gang Communications Access – Two Sides	36"(914mm)	NRC-36-PCPC ■	\$ 89.79	\$ 95.91
	42"(1067mm)	NRC-42-PCPC ■	94.51	101.85
	48"(1219mm)	NRC-48-PCPC ■	99.23	107.79
	60"(1524mm)	NRC-60-PCPC ■	108.67	119.67



NRC-PCPC

Features

- Includes one plastic raceway cover with receptacle cutouts/covers for power and a cutout for two single gang adaptor plates (included) for communication faceplate access on both sides for plate screw mounting.
- May be provided for field porting if used with communication face plates.

■ Available on RUSH.


To Order, Specify:

- Product number.
- Trim color.

Specification Tips

- Punched opening for communication measures 2.25"(57mm) x 3.75"(95mm).
- Inside opening of adaptor plate measures 2.00"(51mm) x 2.81"(71mm).

Raceway Cover with Power and Modular Furniture Telecommunications Outlet Plate Communication Access – One Side	30"(762mm)	NRC-30-NNPF	\$61.45	\$66.35
	36"(914mm)	NRC-36-NNPF	66.17	72.29
	42"(1067mm)	NRC-42-NNPF	70.89	78.23
	48"(1219mm)	NRC-48-NNPF	75.61	84.17
	60"(1524mm)	NRC-60-NNPF	85.05	96.05



NRC-NNPF


Features

- Includes one plastic raceway cover with receptacle cutouts/covers for power and a cutout for modular furniture telecommunications outlet plate access on one side.

To Order, Specify:

- Product number.
- Trim color.

Raceway Cover with Power and Modular Furniture Telecommunications Outlet Plate Communication Access – Two Sides	30"(762mm)	NRC-30-PFPF	\$ 85.07	\$ 89.97
	36"(914mm)	NRC-36-PFPF	89.79	95.91
	42"(1067mm)	NRC-42-PFPF	94.51	101.85
	48"(1219mm)	NRC-48-PFPF	99.23	107.79
	60"(1524mm)	NRC-60-PFPF	108.67	119.67



NRC-PFPF

Features

- Includes one plastic raceway cover with receptacle cutouts/covers for power and a cutout for modular furniture telecommunications outlet plate access on both sides.

To Order, Specify:



- Product number.
- Trim color.

Specification Tips

- Punched opening for information plate snap mounting measures 1.38"(35mm) x 2.70"(69mm).
- Specify when no raceway cover is ordered with a foundation element (no raceway cover option).

PREMISE 4-Circuit (2+2 and 3+1) – Electrical Components

Power Feed Modules — base raceway power application

	Description	Feed Length	Catalog #	Price
Base Feed Module – Hardwire Connection — 4-Circuit (2+2 and 3+1)  NEBF-1-2 NEBF-1-4 	2+2			
		48"(1219mm)	NEBF-1-2	\$313.73
		72"(1829mm)	NEBF-0006-2	371.05
		120"(3048mm)	NEBF-0010-2	485.69
		180"(4572mm)	NEBF-0015-2	628.99
		300"(7620mm)	NEBF-0025-2	915.59
	3+1			
		48"(1219mm)	NEBF-1-4	\$313.73
		72"(1829mm)	NEBF-0006-4	371.05
		120"(3048mm)	NEBF-0010-4	485.69
		180"(4572mm)	NEBF-0015-4	628.99
		300"(7620mm)	NEBF-0025-4	915.59

Features

- Includes one base feed with 4'(1219mm) long, black 1/2"(13mm) flexible metal conduit with six 12-gauge and two 10-gauge wires for up to four 20-amp circuits of power.
- For floor, column, or wall hardwire connections.
- For use with panels equipped with 4-circuit (2+2 or 3+1) power components.
- Base feed module can be field modified to accommodate left or right hand conditions.
- Attaches at any one of the four receptacle sites in a powered base raceway of a monolithic or super base panel.
- Standard in charcoal trim color only.


To Order, Specify:



- 1) Product number.
(No finish specification required.)

Specification Tips

- Not for use with open base raceway panel applications.
- Not for use with power sources other than 120 volt 60 hertz.
- Do not mix 3-circuit with 4-circuit components. Do not mix 2+2 and 3+1 components. Components have unique polarity key and color coding (3-circuit=black, 2+2=blue and 3+1=green).

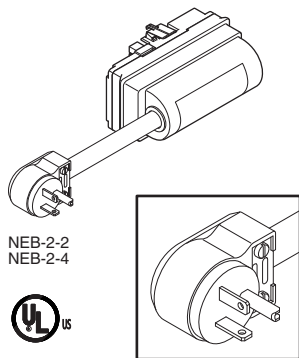Single Circuit Base Feed Module – Receptacle Connection with Power Cord — 4-Circuit (2+2 and 3+1)



Feed Length	Description	Number	Price
2' ♀ (610mm)	2+2 (USA Only)	NEB-2-2 	\$262.14
2' (610mm)	3+1 (USA Only)	NEB-2-4 	\$262.14

Features

- Includes a single circuit power connector, 2'(610mm) cord and 20 amp plug (NEMA 5-20P).
- For use with panels equipped with 4-circuit (2+2 or 3+1) power components.
- Requires a 20 amp, 125 volt power receptacle (NEMA 5-20R) for plug-in (not included).
- Provides power to circuit #1 only.
- Attaches at any of the four receptacle sites in a powered base raceway of a monolithic or super base panel.
- Standard in charcoal trim color only.

◆ Available on RUSH.

To Order, Specify:

- 1) Product number.
(No finish specification required.)


Specification Tips

- **Not for use in Canada due to electrical code restrictions.**
- **Not for use with isolated ground receptacles.**
- Not for use with open base raceway panel applications.
- Not for use with power sources other than 120 volt 60 hertz.
- Do not mix 3-circuit with 4-circuit components. Do not mix 2+2 and 3+1 components. Components have unique polarity key and color coding (3-circuit=black, 2+2=blue and 3+1=green).

PREMISE 4-Circuit (2+2 and 3+1) – Electrical Components

Power Feed Modules — base raceway power application

	Feed Length	Description	Number	Price
Single Circuit Base Feed Module – Receptacle Connection with Power Cord — 4-Circuit (2+2 and 3+1)	6'(1829mm)	2+2 (Canada Only)	NEB-2-A2	\$330.92
	6'(1829mm)	3+1 (Canada Only)	NEB-2-A4	\$330.92

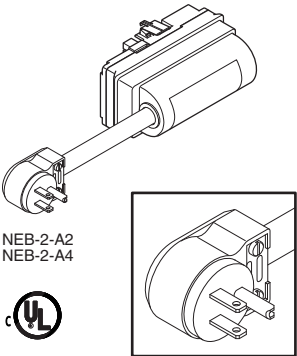

Features

- Includes one circuit power connector, 6'(1829mm) cord and 15 amp plug (NEMA 5-15P).
- For use with panels equipped with 4-circuit (2+2 or 3+1) power components.
- Requires a 15 amp, 125 volt power receptacle (NEMA 5-15R) for plug-in (not included).
- Attaches at any of the four receptacle sites in a powered raceway of a monolithic or super base panel.
- Provides power to circuit #1 only.
- Standard in charcoal trim color only.

To Order, Specify:

- 1) Product number.
(No finish specification required.)


Specification Tips

- **Not for use in USA due to electrical code restrictions.**
- **Not for use with isolated ground receptacles.**
- Not for use with open base raceway panel applications.
- Not for use with power sources other than 120 volt 60 hertz.
- Do not mix 3-circuit with 4-circuit components. Do not mix 2+2 and 3+1 components. Components have unique polarity key and color coding (3-circuit=black, 2+2=blue and 3+1=green).

PREMISE 4-Circuit (2+2 and 3+1) – Electrical Components

Power Feed Modules — base raceway power application

	Description	Number	Price
Base Feed Module – Concealed Hardwire Connection — 4-Circuit (2+2 and 3+1)	Concealed 4-Circuit 2+2	NEBF-5-2 ■	\$485.71
	Concealed 4-Circuit 3+1	NEBF-5-4 ■	\$485.71



NEBF-5-2
NEBF-5-4

Class FA SIN 711-1,
Discount Group XI



Features

- Includes one junction box with modular connector.
- For use with panels equipped with 4-circuit (2+2 or 3+1) power components.
- For floor, column, or wall hardwire connections.
- Provides six 12-gauge and two 10-gauge wires for up to four 20-amp circuits of power.
- Conforms to New York City electrical code.
- Junction box has three 1/2" knockouts.

■ Available on RUSH.


To Order, Specify:

- 1) Product number.
(No finish specification required.)

Specification Tips

- For installation on panels **no less than 36"**(914mm) wide.
- Connector plugs into receptacle site on left side of panel base.
- Not for use with open base raceway panel applications.
- Not for use with power sources other than 120 volt 60 hertz.
- Conduit and fittings for connection between building and junction box are supplied by local electricians.
- Do not mix 3-circuit with 4-circuit components. Do not mix 2+2 and 3+1 components. Components have unique polarity key and color coding (3-circuit=black, 2+2=blue and 3+1=green).

Raised Floor Infeed Base Feed Module — 4-Circuit (2+2 and 3+1)



ENEJ-0048-2WF
ENEJ-0048-4WF

Class SP SIN 711-1,
Discount Group XVI



Feed Length	Description	Number	Price
4'(1219mm)	2+2	ENEJ-0048-2WF	\$225.53
4'(1219mm)	3+1	ENEJ-0048-4WF	\$225.53

Features

- Includes connector assembly which consists of one Power Base connector head, 1/2"(13mm) black flexible metal conduit and one Power Base AI connector and a two port splitter.
- Constructed with six 12-gauge and two 10-gauge wires for up to four 20-amp circuits of power.
- For use with 4-circuit (2+2 or 3+1) power components.
- Attaches at any one of the four receptacle sites in a powered base raceway of a panel and to a Power Base AI underfloor power system or a Power Base AI Wall Feed.
- Base feed module can be field modified to accommodate left or right conditions.
- Connector has integral latching system.
- Connectors are color coded blue (2+2) or green (3+1) and have a polarity key system which prevents misconnection between 3- or 4-circuit connectors.
- UL listed Manufactured wiring system rated for 20-amp 120V/208Y or 120/240V 60 Hz and for use in "other air handling spaces" per the NEC Article 604.
- Standard in charcoal trim color only.

To Order, Specify:

- 1) Product number.
(No finish specification required.)


Specification Tips

- Male Power Base AI connector can plug directly into a zone distribution box, circuit distributor, flush floor box connectors, or wall feed.
- Male Power Base AI connector cannot connect directly to infeed or jumper. Use included circuit distributor to connect to jumper or infeed harness.
- Not for power sources other than 120 volt 60 hertz.

PREMISE 4-Circuit (2+2 and 3+1) – Electrical Components

Power Feed Modules — base raceway power application

Systems Furniture Power Interface Jumper — 4-Circuit (2+2 and 3+1)

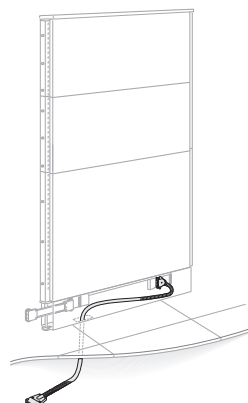

EUEJ-2WF
EUEJ-4WF



Description	Number	Price
64"(1626mm) 2+2 Infeed Connector	EUEJ-0064-2WF	\$181.61
102"(2591mm)	EUEJ-0102-2WF	207.40
144"(3658mm)	EUEJ-0144-2WF	246.09
300"(7620mm)	EUEJ-0300-2WF	565.28
64"(1626mm) 3+1 Infeed Connector	EUEJ-0064-4WF	\$181.61
102"(2591mm)	EUEJ-0102-4WF	207.40
144"(3658mm)	EUEJ-0144-4WF	246.09
300"(7620mm)	EUEJ-0300-4WF	565.28

Features

- Includes connector assembly which consists of one Power Base connector head, 1/2"(13mm) (unpainted) flexible metal conduit and one Power Base AI connector and a two port splitter.
- Constructed with six 12-gauge and two 10-gauge wires for up to four 20-amp circuits of power.
- For use with 4-circuit (2+2) or 3+1) power components.
- Attaches at any one of the four receptacle sites in a powered base raceway of a panel and to a Power Base AI underfloor power system.
- Connector has integral latching system.
- Power Base connector are color coded blue (2+2) or green (3+1) and have a polarity key system which prevents misconnection between 3- or 4-circuit connectors.
- UL listed Manufactured wiring system rated for 20-amp 120V/208Y or 120/240V 60 Hz and for use in "other air handling spaces" per the NEC Article 604.


To Order, Specify:

- Product number.
(No finish specification required.)

Specification Tips

- Male Power Base AI connector can plug directly into a zone distribution box, circuit distributor, or flush floor box connectors.
- Male Power Base AI connector cannot connect directly to infeed or jumper. Use included circuit distributor to connect to jumper or infeed harness.
- Not for power sources other than 120 volt 60 hertz.
- Excess length can be coiled under the floor.
- With field modification of the raceway cover the infeed may be routed under panel and into the base raceway for a concealed connection.

Wall Feed Field Wired 1 Port



FBEW



Description	Height	Length	Number	Price
4-circuit	1 1/2"(38.1mm)	4 11/16"(119mm)	FBEW-0004-41	\$71.44

Features

- Includes 4 11/16"(119mm) junction box cover with one female modular power connector.
- For use with Raised Floor Infeed Base Feed Module and Systems Furniture Power Interface Jumper.
- For use with field supplied 4 11/16"(119mm) square junction box.
- Connector has integral latching system.
- Connectors are color coded and have a polarity key system which prevents misconnection between 3- or 4-circuit connectors.
- UL listed Manufactured wiring system rated for 20-amp 120V/208Y or 120/240V 60 Hz and for use in "other air handling spaces" per the NEC Article 604.

To Order, Specify:


- Product number.
(No finish specification required.)

Specification Tip

- Provides transition from building power to modular power distribution system. May be used with junction box in wall or column.

PREMISE 4-Circuit (2+2 and 3+1) – Electrical Components

Power Feed Modules — top feed power application

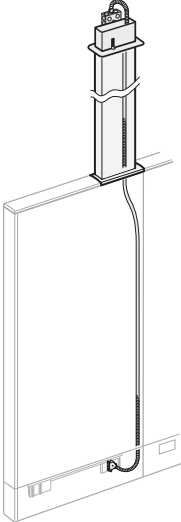	Panel Height	Pole Length	Description	Number	Trim A	B
Monolithic Panel Top Feed Module — 4-Circuit (2+2 and 3+1) 	10' Ceiling Height					
	42"(1067mm) - 53"(1346mm)	95"(2413mm)	2+2	NETM-5300-3T2	\$1671.96	\$1801.78
	64"(1626mm) - 80"(2032mm)	66"(1676mm)		NETM-8000-3T2	1623.90	1721.59
	42"(1067mm) - 53"(1346mm)	95"(2413mm)	3+1	NETM-5300-3T4	\$1671.96	\$1801.78
	64"(1626mm) - 80"(2032mm)	66"(1676mm)		NETM-8000-3T4	1623.90	1721.59
	12' Ceiling Height					
	42"(1067mm) - 53"(1346mm)	119"(3023mm)	2+2	NETM-5300-3W2	\$1701.77	\$1860.15
	64"(1626mm) - 80"(2032mm)	95"(2413mm)		NETM-8000-3W2	1653.71	1779.96
	42"(1067mm) - 53"(1346mm)	119"(3023mm)	3+1	NETM-5300-3W4	\$1701.77	\$1860.15
	64"(1626mm) - 80"(2032mm)	95"(2413mm)		NETM-8000-3W4	1653.71	1779.96

NETM-3T2
NETM-3T4
NETM-3W2
NETM-3W4



Features

- Includes one electrical harness in metal conduit, electrical box, ceiling bezel plate, pole and hardware.
- For connection to the electrical source located in space above a drop ceiling.
- For use with panels equipped with 4-circuit (2+2 or 3+1) power components.
- Electrical harness contained in metal conduit allows for adjacent routing of communication cabling within the pole.
- For routing and cabling capacities see Specification Guide.
- Removable cover on poles provides access to pathway.
- Provides six 12-gauge and two 10-gauge wires for up to four 20-amp circuits of power.
- Routes power to base raceway.
- Attaches at any one of the four receptacle sites in a powered base raceway.

◆ Available on RUSH.

To Order, Specify:

- 1) Product number.
- 2) Trim color.

Specification Tips


- For installation on fabric monolithic panels no less than 24"(610mm) wide.
- Not for use with glass or open base panels.
- Can be used with standard, grooved or wood top cap.
- Mounts 1 1/2"(38mm) from the end of the top cap.
- Not for use with power sources other than 120 volt 60 hertz.
- Do not mix 3-circuit with 4-circuit components. Do not mix 2+2 and 3+1 components. Components have unique polarity key and color coding (3-circuit=black, 2+2=blue and 3+1=green).

NOTE: Wire harness length is 180"(4572mm) regardless of pole length.

PREMISE 4-Circuit (2+2 and 3+1) – Electrical Components


Power Feed Modules — top feed power application

Stackable Panel Top Feed Module — 4-Circuit (2+2 and 3+1)

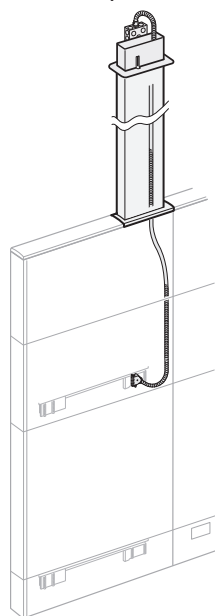

Beltline Connection

NETP-3T2
NETP-3T4
NETP-3W2
NETP-3W4

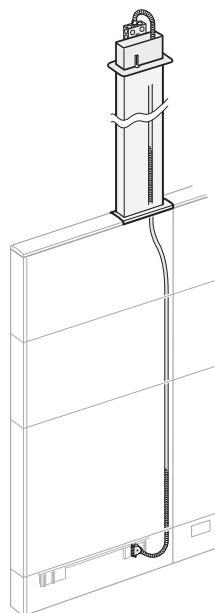

Base Raceway Connection



Panel Height	Pole Length	Description	Number	Trim A	B
10' Ceiling Height					
42"(1067mm) - 48"(1219mm)	95"(2413mm)	2+2	NETP-4800-3T2	\$1721.39	\$1857.16
64"(1626mm) - 80"(2032mm)	66"(1676mm)		NETP-8000-3T2	1664.43	1762.12
42"(1067mm) - 48"(1219mm)	95"(2413mm)	3+1	NETP-4800-3T4	\$1721.39	\$1857.16
64"(1626mm) - 80"(2032mm)	66"(1676mm)		NETP-8000-3T4	1664.43	1762.12
12' Ceiling Height					
42"(1067mm) - 48"(1219mm)	119"(3023mm)	2+2	NETP-4800-3W2	\$1751.20	\$1915.53
64"(1626mm) - 80"(2032mm)	95"(2413mm)		NETP-8000-3W2	1694.24	1820.49
42"(1067mm) - 48"(1219mm)	119"(3023mm)	3+1	NETP-4800-3W4	\$1751.20	\$1915.53
64"(1626mm) - 80"(2032mm)	95"(2413mm)		NETP-8000-3W4	1694.24	1820.49

Features

- Includes one electrical harness in metal conduit, electrical box, ceiling bezel plate, pole and hardware.
- For connection to the electrical source located in space above a drop ceiling.
- For use with panels equipped with 4-circuit (2+2 or 3+1) power components.
- Electrical harness contained in metal conduit allows for adjacent routing of communication cabling within the pole.
- For routing and cabling capacities see Specification Guide.
- Removable cover on pole provides access to pathway.
- Provides six 12-gauge and two 10-gauge wires for up to four 20-amp circuits of power.
- Mounts to stack kit and routes power and communications cabling from ceiling to the base raceway on a monolithic base or super base panel, beltline, or standing-height on a stack kit.
- Attaches at any one of the four receptacle sites in a powered base raceway.

◆ Available on RUSH.

To Order, Specify:

- 1) Product number.
- 2) Trim color.

Specification Tips




- For installation on stack kits mounted above monolithic or super base panels no less than 24"(610mm) wide for base raceway.
- Not for use with glass, translucent, perforated or open stack kits.
- Can be used with standard, grooved or wood top cap.
- Not recommended for use on stack kits with structural crossbars in off-modular applications.
- Mounts to the top cross bar of a stack kit 5 3/8"(93mm) from the end of top cap.
- Not for use with power sources other than 120 volt 60 hertz.
- Do not mix 3-circuit with 4-circuit components. Do not mix 2+2 and 3+1 components. Components have unique polarity key and color coding (3-circuit=black, 2+2=blue and 3+1=green).

NOTE: Wire harness length is 180"(4572mm) regardless of pole length.

PREMISE 4-Circuit (2+2 and 3+1) – Electrical Components

Power Feed Modules — top feed power application

	Ceiling Height	Description	Number	Price
External Top Feed Module — 4-Circuit (2+2 and 3+1)	10'(3048mm)	2+2	NETX-10-P2	\$1255.02
	10'(3048mm)	3+1	NETX-10-P4	\$1255.02

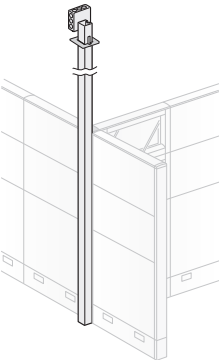

NETX-10-P2
NETX-10-P4



Features

- Includes one electrical harness in metal conduit, electrical box, ceiling bezel plate, 3" X 3" pole and hardware.
- For connection to the electrical source located in space above a drop ceiling.
- For use with panels equipped with 4-circuit (2+2 or 3+1) power components.
- Routes power and communications from the ceiling to the base raceway on any panel configuration including open or glazed stack kits.
- For routing and cabling capacities see Specification Guide.
- Removable cover on poles provides access to pathway.
- Provides six 12-gauge and two 10-gauge wires for up to four 20-amp circuits of power.
- Routes power to base raceway.
- Attaches at any one of the four receptacle sites in a powered base raceway.

To Order, Specify:

- 1) Product number.
- 2) Trim color.*

***Note:** Upcharge list for Metallic trim color
Top feed module = **\$44.40.**

Specification Tips


- Can be used in end-of-run, 2-way, and 3-way conditions on any panel type.
- 2-and 3-way conditions require additional connector. See Specification Guide for information.
- Can be used with standard, grooved or wood top cap.
- Not for use with power sources other than 120 volt 60 hertz.
- Do not mix 3-circuit with 4-circuit components. Do not mix 2+2 and 3+1 components. Components have unique polarity key and color coding (3-circuit=black, 2+2=blue and 3+1=green).

NOTE: Wire harness length is 180"(4572mm) regardless of pole length.

PREMISE 4-Circuit (2+2 and 3+1) – Electrical Components


Power Feed Modules — top feed power application

	Height	Application	Description	Number	Price
Floor-to-Ceiling Monolithic and Super Base Panel Top Feed Module — 4-Circuit (2+2 and 3+1)	10'(3048mm)	Base/Beltline Connection	2+2	NETC-10-P2	\$828.50
	10'(3048mm)	Base/Beltline Connection	3+1	NETC-10-P4	\$828.50

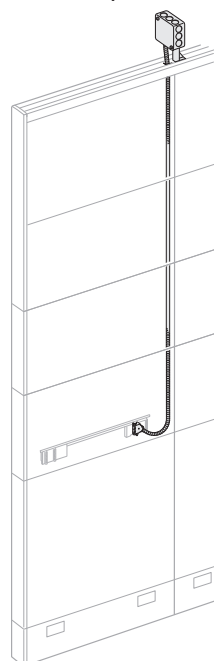

Beltline Connection

NETC-10-P2
NETC-10-P4

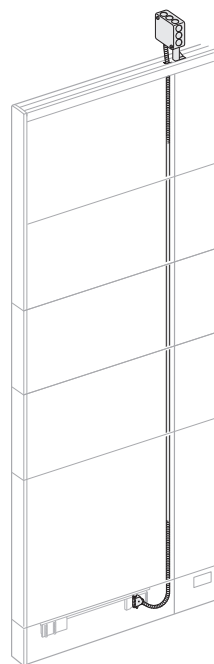

Base Raceway Connection



Features

- Includes one electrical harness in metal conduit, electrical box and hardware.
- Mounts to floor to ceiling track and routes power from the electrical source located in space above drop ceiling to the base raceway on a monolithic or super base panel, beltline or standing-height on stack kit.
- For use with panels equipped with 4-circuit (2+2 or 3+1) power components.
- Provides six 12-gauge and two 10-gauge wires for up to four 20-amp circuits of power.
- Attaches at any of the four receptacle sites in a powered panel.

Specification Tips

- For installation on monolithic or super base panels no less than 24"(610mm) wide.
- **Cannot be installed on an open, glazed, translucent or perforated stack kit.**
- Top junction box mounts to the ceiling track.
- Ceiling height cannot exceed 10'(3048mm).
- Not for use with power source other than 120 volt 60 hertz.
- Do not mix 3-circuit with 4-circuit components. Do not mix 2+2 and 3+1 components. Components have unique polarity key and color coding (3-circuit=black, 2+2=blue and 3+1=green).

NOTE: Wire harness length is 180"(4572mm).


To Order, Specify:

- 1) Product number.
(No finish specification required.)



PREMISE 4-Circuit (2+2 and 3+1) – Electrical Components

Power Feed Modules — top feed power application

	Description	Number	Length	Price
Infeed Harness — 4-Circuit (2+2 and 3+1)	2+2	VNEH-0000-2	15'(4572mm)	\$579.66
		VNEH-0030-2	30'(9144mm)	878.95
	3+1	VNEH-0000-4	15'(4572mm)	\$579.66
		VNEH-0030-4	30'(9144mm)	878.95

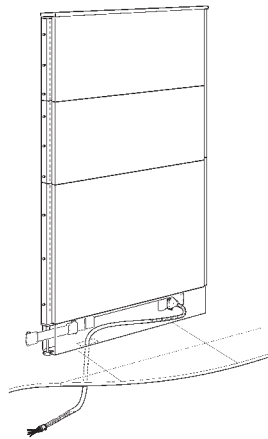

VNEH-2
VNEH-4

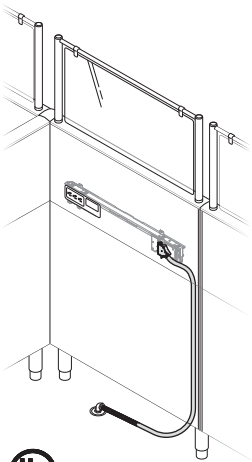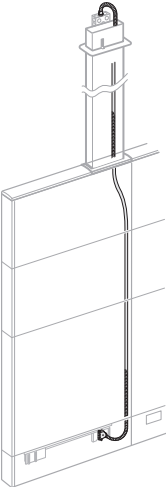

Features

- Includes electrical harness in galvanized metal conduit.
- Can be used to route power from floor to beltline on open or closed base panels. Electrical harness routes through panel side frame rail of monolithic or super base panel.
- Can be used with a powered top feed pole to bring an additional set of four circuits into the workstation cluster. Local electrician to provide secondary junction box at top of top feed pole.
- For use with panels equipped with 4-circuit (2+2 or 3+1) power components.
- Provides six 12-gauge and two 10-gauge wires for up to four 20 amp circuits of power.
- Attaches at any one of the four receptacle sites in a powered panel.

Available on RUSH.

To Order, Specify:

- 1) Product number.
(No finish specification required.)


Specification Tips

- Not for use with power sources other than 120 volt 60 hertz.
- For applications from floor to beltline where conduit is exposed. Split tubing may be field supplied separately to cover galvanized metal conduit.
- Do not mix 3-circuit with 4-circuit components. Do not mix 2+2 and 3+1 components. Components have unique polarity key and color coding (3-circuit=black, 2+2=blue and 3+1=green).

PREMISE 4-Circuit (2+2 and 3+1) – Electrical Components

Power Kits

Power Kit for Stack Application — 4-Circuit (2+2 and 3+1)

NEKA-P2
NEKA-P4

Panel Width	Description	Number	Price
24"(610mm)	2+2	NEKA-24-P2	\$556.22
30"(762mm)		NEKA-30-P2	566.74
36"(914mm)		NEKA-36-P2	577.26
42"(1067mm)		NEKA-42-P2	587.78
48"(1219mm)		NEKA-48-P2	598.30
60"(1524mm)		NEKA-60-P2	619.34
24"(610mm)	3+1	NEKA-24-P4	\$556.22
30"(762mm)		NEKA-30-P4	566.74
36"(914mm)		NEKA-36-P4	577.26
42"(1067mm)		NEKA-42-P4	587.78
48"(1219mm)		NEKA-48-P4	598.30
60"(1524mm)		NEKA-60-P4	619.34

Features

- Includes power distribution assembly (PDA), NEF-1 flexible power connector and cable trough, one 3"(76mm) straight cable guide, one 3"(76mm) corner cable guide, cable hangers, cross bar, and mounting hardware.
- Connector
 - 2+2 flex power NEF-1-2
 - 2+1 flex power NEF-1-4
- Can be used to access power or route power through stack kit at beltline and standing height.
- Standard in charcoal trim color only.
- Available on RUSH.

To Order, Specify:

- Product number.
(No finish specification required.)


Specification Tips

- Flexible power connector provided with power kit will accommodate straight in-line, inside 90° and inside 120° conditions. Refer to NES-1-2 or NES-1-4 flexible power connector for other applications.
- To access power, specify triplex receptacles separately for use with power kit.
- To route power through stack kit at beltline and standing height with a separately specified pad.
- Use of separately specified Power Distribution Support Bracket is recommended to stabilize power distribution assembly (PDA).
- Cannot be used with open, glazed, translucent or perforated pad.**
- 24"(610mm) kit is for routing power through panel only-no power access.
- For 18"(457mm) panels there is neither a power kit nor an extended power connector available to route power at the beltline or standing height.
- Do not mix 3-circuit with 4-circuit components. Do not mix 2+2 and 3+1 components. Components have unique polarity key and color coding (3-circuit=black, 2+2=blue and 3+1=green).

PREMISE 4-Circuit (2+2 and 3+1) – Electrical Components

Power Kits

Stack Application Retrofit Kit – 4-Circuit (2+2 and 3+1)



NEKB-P2
NEKB-P4



Panel Width	Description	Number	Price
24"(610mm)	2+2	NEKB-24-P2	\$446.39
30"(762mm)		NEKB-30-P2	466.25
36"(914mm)		NEKB-36-P2	486.11
42"(1067mm)		NEKB-42-P2	505.97
48"(1219mm)		NEKB-48-P2	525.83
60"(1524mm)		NEKB-60-P2	565.55
24"(610mm)	3+1	NEKB-24-P4	\$446.39
30"(762mm)		NEKB-30-P4	466.25
36"(914mm)		NEKB-36-P4	486.11
42"(1067mm)		NEKB-42-P4	505.97
48"(1219mm)		NEKB-48-P4	525.83
60"(1524mm)		NEKB-60-P4	565.55

Features

- Includes power distribution assembly (PDA), NEF-1 flexible power connector and cable trough, one 3"(76mm) straight cable guide, one 3"(76mm) corner cable guide and cable hangers.
- Connector
 - 2+2 flex power NEF-1-2
 - 2+1 flex power NEF-1-4
- Can be used to access power or route power through stack kit at beltline and standing height.
- Standard in charcoal trim color only.
- Available on RUSH.

To Order, Specify:

- Product number.
(No finish specification required.)


Specification Tips

- Flexible power connector provided with power kit will accommodate straight in-line, inside 90° and inside 120° conditions. Refer to NES-1-2 or NES-1-4 flexible power connector for other applications.
- To access power, specify triplex receptacles and 10"(254mm) or 16"(406mm) high PREMISE technology pad only for use with power kit.
- To route power through stack kit at beltline and standing height with a separately specified pad.
- Use of separately specified Power Distribution Support Bracket is recommended to stabilize power distribution assembly (PDA).
- Cannot be used with open, glazed, translucent or perforated pad.**
- 24"(610mm) kit is for routing power through panel only-no power access.
- For 18"(457mm) panels there is neither a power kit nor an extended power connector available to route power at the beltline or standing height.
- Do not mix 3-circuit with 4-circuit components. Do not mix 2+2 and 3+1 components. Components have unique polarity key and color coding (3-circuit=black, 2+2=blue and 3+1=green).

PREMISE 4-Circuit (2+2 and 3+1) – Electrical Components

Power Kits

Structural Power Kit for Stack Application — 4-Circuit (2+2 and 3+1)



NEKS-PS2
NEKS-PS4



Panel Width	Description	Number	Price
24"(610mm)	2+2	NEKS-24-PS2	\$724.50
30"(762mm)		NEKS-30-PS2	737.35
36"(914mm)		NEKS-36-PS2	750.20
42"(1067mm)		NEKS-42-PS2	763.05
48"(1219mm)		NEKS-48-PS2	775.90
60"(1524mm)		NEKS-60-PS2	801.60
24"(610mm)	3+1	NEKS-24-PS4	\$724.50
30"(762mm)		NEKS-30-PS4	737.35
36"(914mm)		NEKS-36-PS4	750.20
42"(1067mm)		NEKS-42-PS4	763.05
48"(1219mm)		NEKS-48-PS4	775.90
60"(1524mm)		NEKS-60-PS4	801.60

Features

- Includes power distribution assembly (PDA), cable trough, NEF-1 flexible power connector, one 3"(76mm) straight cable guide, one 3"(76mm) corner cable guide, cable hangers, structural cross bar, and mounting hardware.
- Connector
 - 2+2 flex power NEF-1-2
 - 2+1 flex power NEF-1-4
- Can be used to access power or route power through stack kit at beltline and standing height.
- Standard in charcoal trim color only.

To Order, Specify:



- Product number.
(No finish specification required.)


Specification Tips

- For power access at work-height a structural cross bar must be used for off-modular overheads.**
- Only for use with slat technology pads to access work height power.**
- Flexible power connector provided with power kit will accommodate straight in-line, inside 90° and inside 120° conditions. Refer to NES-1-2 or NES-1-4 flexible power connector for other applications.
- Not recommended for top feed applications due to structural crossbar.
- To access power, specify triplex receptacles and 16"(406mm) high slat PREMISE technology pad only for use with power kit.
- To route power through stack kit at beltline and standing height with a separately specified off-modular pad.
- Use of separately specified Power Distribution Support Bracket is recommended to stabilize power distribution assembly (PDA).
- Cannot be used with open, glazed, translucent or perforated pad.**
- 24"(610mm) kit is for routing power through panel only-no power access.
- For 18"(457mm) panels there is neither a power kit nor an extended power connector available to route power at the beltline or standing height.
- Do not mix 3-circuit with 4-circuit components. Do not mix 2+2 and 3+1 components. Components have unique polarity key and color coding (3-circuit=black, 2+2=blue and 3+1=green).

PREMISE 4-Circuit (2+2 and 3+1) – Electrical Accessories

Vertical Power Connectors

	Length	Description	Number	Price
Super Base Panel-to-Stack Kit Beltline Vertical Power Connector — 4-Circuit (2+2 and 3+1)	32"(813mm)	2+2	NEPH-4-2 	\$205.66
	32"(813mm)	3+1	NEPH-4-4 	\$205.66

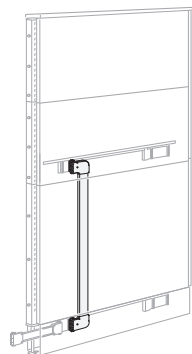


NEPH-4-2
NEPH-4-4



Features

- Includes one (1) power connector with safety latches for securing vertical power connector to power distribution assembly.
- Transfers power from the base raceway to beltline raceway.
- For use with panels equipped with 4-circuit (2+2 or 3+1) power components.
- Can be used with either 10"(254mm) or 16"(406mm) powered kit for stack application on super base panel (16"(406mm) shown).
- Standard in charcoal trim color only.



 Available on RUSH.


To Order, Specify:

- 1) Product number.
(No finish specification required.)

Specification Tips

- The power connectors install on the left side of panel into receptacle locations.
- Blocks access to beltline and base receptacle location.
- Field bezel modification required per installation instructions.
- **Cannot be used with open stack kits or glazed stack kits.**
- Do not mix 3-circuit with 4-circuit components. Do not mix 2+2 and 3+1 components. Components have unique polarity key and color coding (3-circuit=black, 2+2=blue and 3+1=green).

Super Base Panel-to-Stack Kit Standing Height Vertical Power — 4-Circuit (2+2 and 3+1)	48"(1219mm)	2+2	NEPH-5-2 	\$276.95
	48"(1219mm)	3+1	NEPH-5-4 	\$276.95

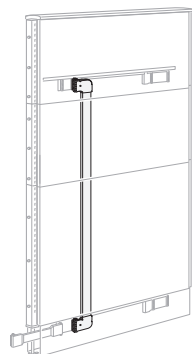

NEPH-5-2
NEPH-5-4



Features

- Includes one (1) power connector with safety latches for securing vertical power connector to power distribution assembly.
- Transfers power from the base raceway to standing height.
- For use with panels equipped with 4-circuit (2+2 or 3+1) power components.
- Can be used with 10"(254mm) and 16"(406mm) powered kit for stack application located above a 16"(405mm) stack kit on a super base panel.
- Standard in charcoal trim color only.

 Available on RUSH.

To Order, Specify:

- 1) Product number.
(No finish specification required.)



Specification Tips

- The power connectors install on left side of panel into receptacle locations.
- Blocks access to standing height and base receptacle location.
- **Cannot be used with open stack kits or glazed stack kits.**
- Do not mix 3-circuit with 4-circuit components. Do not mix 2+2 and 3+1 components. Components have unique polarity key and color coding (3-circuit=black, 2+2=blue and 3+1=green).


PREMISE 4-Circuit (2+2 and 3+1) – Electrical Components

Horizontal Power Connector — base raceway and beltline power applications



**Flexible Power Connector —
4-Circuit (2+2 and 3+1)**





Monolithic/Super Base straight condition





Stack Kit straight condition





Monolithic/Super Base inside 90° condition



Stack kit inside 90° condition



Monolithic/Super Base
inside 120° condition



Stack kit inside 120° condition

NEF-1-2
NEF-1-4



Length	Description	Number	Price
13 1/4"(337mm)	2+2	NEF-1-2	\$116.94
13 3/4"(349mm)	3+1	NEF-1-4	\$116.94

Features

- Includes one flexible power connector with safety latches for securing connector to power block.
 - Continues electrical circuits between base panels in straight, 90° or 120° conditions, and connected stack kits in an inside 90° or 120° condition.
 - For use with panels equipped with 4-circuit (2+2 and 3+1) power components.
 - NEF-1_ flexible power connectors ship with each powered standard or base panel as follows:
 - .95 with 4-circuit power
 - Standard in charcoal trim color only.
- Available on RUSH.

To Order, Specify:

- 1) Product number.
(No finish specification required.)



Specification Tips

- Cable guides must be used in stack kit applications to protect flexible power connector.
- Do not mix 3-circuit with 4-circuit components. Do not mix 2+2 and 3+1 components. Components have unique polarity key and color coding (3-circuit=black, 2+2=blue and 3+1=green).


PREMISE 4-Circuit (2+2 and 3+1) – Electrical Components

Horizontal Power Connector — base raceway and beltline power applications


Straight-Span Flexible Power Connector




Monolithic/Super panel three-way or four-way condition



Stack kit three-way or four-way condition



Monolithic/Super panel outside 90° condition



Monolithic/Super panel outside 120° condition

NES-1-2
NES-1-4



Length	Description	Number	Price
16"(406mm)	2+2	NES-1-2	\$116.94
16"(406mm)	3+1	NES-1-4	\$116.94

Features

- Includes one straight-span flexible power connector with safety latches for securing connector to power distribution assembly.
- Continues electrical circuits across the three-inch space between powered panels, base panels or stack kits in three-way or four-way conditions, and between powered panels in an outside 90°/120° condition.
- For use with panels equipped with 4-circuit (2+2 or 3+1) power components.
- Standard in charcoal trim color only.
- ◆ Available on RUSH.

To Order, Specify:

- 1) Product number.
(No finish specification required.)


Specification Tips

- Cable guides must be used in stack kit applications to protect flexible connector.
- Straight span flexible power connector must be separately specified and is not included with panel.
- Do not mix 3-circuit with 4-circuit components. Do not mix 2+2 and 3+1 components. Components have unique polarity key and color coding (3-circuit=black, 2+2=blue and 3+1=green).


PREMISE 4-Circuit (2+2 and 3+1) – Electrical Components

Horizontal Power Connector — base raceway power applications

Extended Flexible Metal Power Connectors for Base Raceway




Straight Condition



90° Condition


NEJS-18




120° Condition




(1) 90° Condition




(2) 90° Conditions



3-Way Condition



90° and 3-Way Condition



(2) 90° Conditions

Panel Width	Length	Description	Number	Price
18"(457mm)	45"(1143mm)	2+2	NEJS-18-2	\$216.96
18"(457mm)	45"(1143mm)	3+1	NEJS-18-4	\$216.96

Features

- Includes one extended flexible metal power connector with safety latches.
- Spans power through **one** non-powered 18"(457mm) wide monolithic or super base panel(s) located between powered panels.
- For use with panels equipped with 4-circuit (2+2 or 3+1) power components.
- **Specify for use in base raceway only.**
- Extended power connectors cannot be coupled together.
- Standard in charcoal trim with metal conduit.

Specification Tips

- Extended flexible metal power connector must be ordered separately.
- One size connector fits all applications shown.
- Do not mix 3-circuit with 4-circuit components. Do not mix 2+2 and 3+1 components. Components have unique polarity key and color coding (3-circuit=black, 2+2=blue and 3+1=green).


To Order, Specify:

- 1) Product number.
(No finish specification required.)

PREMISE 4-Circuit (2+2 and 3+1) – Electrical Components

Receptacles

Triples Receptacles – 15 Amp — 4-Circuit (2+2 and 3+1)



NER-1500



Description	Circuit Access	Receptacle Identifier	Ground Type	Number	Price
2+2 15A Triplex	Circuit 1	1	Common	NER-1500-M12	\$325.38
	Circuit 2	2		NER-1500-M22	325.38
	Circuit 3	3		NER-1500-M32	325.38
	Circuit 4	4		NER-1500-M42	325.38
2+2 15A Triplex	Circuit 1	1	Isolated	NER-1500-I12	\$343.26
	Circuit 2	2		NER-1500-I22	343.26
	Circuit 3	3		NER-1500-I32	343.26
	Circuit 4	4		NER-1500-I42	343.26
3+1 15A Triplex	Circuit 1	A	Common	NER-1500-M14	\$325.38
	Circuit 2	B		NER-1500-M24	325.38
	Circuit 3	C		NER-1500-M34	325.38
	Circuit 4	D		NER-1500-M44	325.38
3+1 15A Triplex	Circuit 1	A	Isolated	NER-1500-I14	\$343.26
	Circuit 2	B		NER-1500-I24	343.26
	Circuit 3	C		NER-1500-I34	343.26
	Circuit 4	D		NER-1500-I44	343.26

Features

- Includes box of six receptacles, each receptacle has three 15 Amp outlets (NEMA 5-15R configuration).
- For use with panels equipped with 4-circuit (2+2 or 3+1) power components.
- Receptacles are circuit and ground type specific.
- Available on RUSH.

To Order, Specify:

- Product number.
- Trim color (standard trim only).

Specification Tips



- Receptacles have fixed circuit access and are not field programmable. Specify appropriate number of receptacles for each circuit.
- For power access at any location within the panels with appropriate base raceway covers or technology pad.
- Isolated ground receptacle not for use with single circuit base feed module.
- Do not mix 3-circuit with 4-circuit components. Do not mix 2+2 and 3+1 components. Components have unique polarity key and color coding (3-circuit=black, 2+2=blue and 3+1=green).

NOTE: 3+1 receptacles identify circuit access with letters (i.e. Circuit 1=A).

PREMISE 4-Circuit (2+2 and 3+1) – Electrical Components

Receptacles

Triplex Receptacles – 20 Amp — 4-Circuit (2+2 and 3+1)



NER-2000



Description	Circuit Access	Receptacle Identifier	Ground Type	Number	Price
2+2 20A Triplex	Circuit 1	1	Common	NER-2000-M12	\$668.78
	Circuit 2	2		NER-2000-M22	668.78
	Circuit 3	3		NER-2000-M32	668.78
	Circuit 4	4		NER-2000-M42	668.78
2+2 20A Triplex	Circuit 1	1	Isolated	NER-2000-I12	\$686.66
	Circuit 2	2		NER-2000-I22	686.66
	Circuit 3	3		NER-2000-I32	686.66
	Circuit 4	4		NER-2000-I42	686.66
3+1 20A Triplex	Circuit 1	A	Common	NER-2000-M14	\$668.78
	Circuit 2	B		NER-2000-M24	668.78
	Circuit 3	C		NER-2000-M34	668.78
	Circuit 4	D		NER-2000-M44	668.78
3+1 20A Triplex	Circuit 1	A	Isolated	NER-2000-I14	\$686.66
	Circuit 2	B		NER-2000-I24	686.66
	Circuit 3	C		NER-2000-I34	686.66
	Circuit 4	D		NER-2000-I44	686.66

Features

- Includes box of six receptacles, each receptacle has three 20 Amp outlets (NEMA 5-20R configuration).
- For use with panels equipped with 4-circuit (2+2 or 3+1) power components.
- Receptacles are circuit and ground type specific.

To Order, Specify:

- 1) Product number.
- 2) Trim color (standard trim only).

Specification Tips


- **Receptacles have fixed circuit access and are not field programmable. Specify appropriate number of receptacles for each circuit.**
- For power access at any location within the panels with appropriate base raceway covers or technology pad.
- Isolated ground receptacle not for use with single circuit cord base feed module - receptacle connection with cord feed.
- Do not mix 3-circuit with 4-circuit components. Do not mix 2+2 and 3+1 components. Components have unique polarity key and color coding (3-circuit=black, 2+2=blue and 3+1=green).

NOTE: 3+1 receptacles identify circuit access with letters (i.e. Circuit 1=A).

Power Break Marker

NEP-1

\$149.58



NEP-1

Features


- Includes box of fifty paper labels.
- Use one marker at each power distribution assembly to close the flex connector site wherever an improper electrical connection may occur.
- Features following message: "Do not remove – Power Break – Consult Electrical Plan."

To Order, Specify:

- 1) Product number.
(No finish specification required.)

PREMISE 4-Circuit (2+2 and 3+1) – Electrical Components

Power & Communication Port Kit

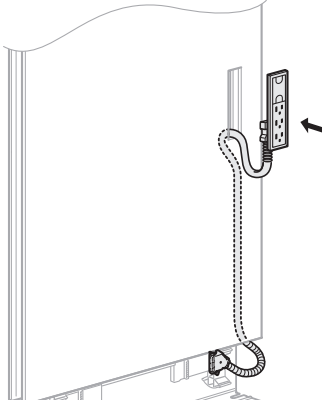	Height	Width	Installed Height*	Description	Number	Price
Power/Communication Port Kit – for use with Monolithic Panel 	9"(229mm)	3 1/4"(83mm)	18"(457mm) to 34"(864mm)	2+2 Circuit #1 Common Ground	NPCA-1-2	\$542.20
				2+2 Circuit #2 Common Ground	NPCA-2-2	542.20
				2+2 Circuit #3 Common Ground	NPCA-3-2	542.20
				2+2 Circuit #4 Common Ground	NPCA-4-2	542.20
	9"(229mm)	3 1/4"(83mm)	18"(457mm) to 34"(864mm)	3+1 Circuit #1 Common Ground	NPCA-1-4	\$542.20
				3+1 Circuit #2 Common Ground	NPCA-2-4	542.20
				3+1 Circuit #3 Common Ground	NPCA-3-4	542.20
				3+1 Circuit #4 Common Ground	NPCA-4-4	542.20
	9"(229mm)	3 1/4"(83mm)	18"(457mm) to 34"(864mm)	2+2 Circuit #1 Isolated Ground	NPCA-1-G2	\$654.38
				2+2 Circuit #2 Isolated Ground	NPCA-2-G2	654.38
				2+2 Circuit #3 Isolated Ground	NPCA-3-G2	654.38
				2+2 Circuit #4 Isolated Ground	NPCA-4-G2	654.38
	9"(229mm)	3 1/4"(83mm)	18"(457mm) to 34"(864mm)	3+1 Circuit #1 Isolated Ground	NPCA-1-G4	\$654.38
				3+1 Circuit #2 Isolated Ground	NPCA-2-G4	654.38
				3+1 Circuit #3 Isolated Ground	NPCA-3-G4	654.38
				3+1 Circuit #4 Isolated Ground	NPCA-4-G4	654.38

*Installed height measures from the bottom of port kit to bottom of raceway cover.

Features

- Includes edge bracket, bezel, mounting template, circuit-specific harness which connects to base raceway PDA, circuit-specific common or isolated ground triplex receptacle and one modular furniture telecommunications outlet opening [1.38"(25mm) x 2.71"(69mm)] with blank cover.
- For use with panels equipped with 4-circuit (2+2 or 3+1) power components.
- Flush mounts into surface of fabric monolithic panels to provide electrical and/or communication access at beltline or below standard worksurface height.
- Power connection occupies a receptacle connector location in base raceway.
- Standard in charcoal trim color only.

To Order, Specify:

- 1) Product number.
(No finish specification required.)

Specification Tips

- Beltline height mounting location not available on 32"(813mm) and 42"(1067mm) high monolithic panels.
- Specification of circuit one, two, three or four is required.
- Must be installed vertically (communications on top, electrical on bottom).
- May be installed on the left or right side of the panel face.
- Requires field modification of the panel.
- Modular furniture telecommunications outlet must be field supplied.
- Do not mix 3-circuit with 4-circuit components. Do not mix 2+2 and 3+1 components. Components have unique polarity key and color coding (3-circuit=black, 2+2=blue and 3+1=green).


NPCA-2
NPCA-4
NPCA-G2
NPCA-G4



PREMISE 4-Circuit (2+2 and 3+1) – Electrical Components

Power & Communication Port Kit

Power/Communication Port Kit – Back-to-Back – for use with Monolithic Panel

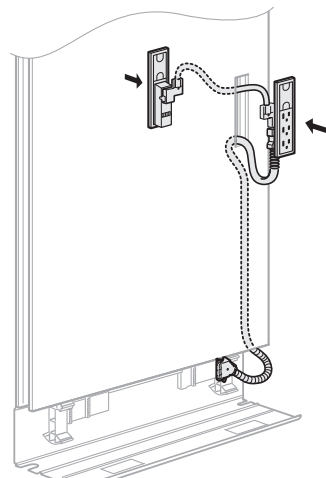

NPCA-B2
NPCA-B4
NPCA-BG2
NPCA-BG4



Height	Width	Installed Height*	Description	Number	Price
9"(229mm)	3 1/4"(83mm)	18"(457mm) to 34"(864mm)	2+2 Circuit #1 Common Ground	NPCA-1-B2	\$ 959.37
			2+2 Circuit #2 Common Ground	NPCA-2-B2	959.37
			2+2 Circuit #3 Common Ground	NPCA-3-B2	959.37
			2+2 Circuit #4 Common Ground	NPCA-4-B2	959.37
9"(229mm)	3 1/4"(83mm)	18"(457mm) to 34"(864mm)	3+1 Circuit #1 Common Ground	NPCA-1-B4	\$ 959.37
			3+1 Circuit #2 Common Ground	NPCA-2-B4	959.37
			3+1 Circuit #3 Common Ground	NPCA-3-B4	959.37
			3+1 Circuit #4 Common Ground	NPCA-4-B4	959.37
9"(229mm)	3 1/4"(83mm)	18"(457mm) to 34"(864mm)	2+2 Circuit #1 Isolated Ground	NPCA-1-BG2	\$1042.34
			2+2 Circuit #2 Isolated Ground	NPCA-2-BG2	1042.34
			2+2 Circuit #3 Isolated Ground	NPCA-3-BG2	1042.34
			2+2 Circuit #4 Isolated Ground	NPCA-4-BG2	1042.34
9"(229mm)	3 1/4"(83mm)	18"(457mm) to 34"(864mm)	3+1 Circuit #1 Isolated Ground	NPCA-1-BG4	\$1042.34
			3+1 Circuit #2 Isolated Ground	NPCA-2-BG4	1042.34
			3+1 Circuit #3 Isolated Ground	NPCA-3-BG4	1042.34
			3+1 Circuit #4 Isolated Ground	NPCA-4-BG4	1042.34

*Installed height measures from the bottom of port kit to bottom of raceway cover.

Features

- Includes edge brackets, bezels, mounting template, circuit-specific harness which connects to base raceway PDA, circuit-specific common or isolated ground triplex receptacles and two modular furniture telecommunications outlet openings [1.38"(25mm) x 2.71"(69mm)] with blank cover, and one back-to-back jumper.
- For use with panels equipped with 4-circuit (2+2 or 3+1) power components.
- Flush mounts into surface of fabric monolithic panels to provide electrical and/or communication access at beltline or below standard worksurface height.
- Provides power and/or communication on front and back side of panel directly behind each other.
- Both front and back run off same circuit and grounding method.
- Power connection occupies a receptacle connector location in base raceway.
- Standard in charcoal trim color only.

To Order, Specify:


- 1) Product number.
(No finish specification required.)

Specification Tips

- Beltline height mounting location not available on 32"(813mm) and 42"(1067mm) high monolithic panels.
- Specification of circuit one, two, three, or four is required.
- Must be installed vertically (communication on top, electrical on bottom).
- May be installed on the left or right side of the panel face.
- Requires field modification of the panel.
- Modular furniture telecommunications outlet must be field supplied.
- Do not mix 3-circuit with 4-circuit components. Do not mix 2+2 and 3+1 components. Components have unique polarity key and color coding (3-circuit=black, 2+2=blue and 3+1=green).

PREMISE 4-Circuit (2+2 and 3+1) – Electrical Components

Power Kits — base raceway power application

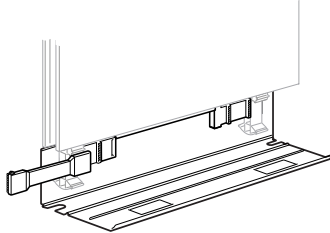	Height	Panel Width	Description	Number	Trim A	B
 <p>Base Raceway Retrofit Kit – Powered — 4-Circuit (2+2 and 3+1)</p>	6 3/4"(171mm)	24"(610mm)	2+2	NEKP-24-2	\$341.54	\$349.92
		30"(762mm)		NEKP-30-2	348.73	359.51
		36"(914mm)		NEKP-36-2	355.92	369.10
		42"(1067mm)		NEKP-42-2	363.11	378.69
		48"(1219mm)		NEKP-48-2	370.30	388.28
		60"(1524mm)		NEKP-60-2	384.68	407.46
	6 3/4"(171mm)	24"(610mm)	3+1	NEKP-24-4	\$341.54	\$349.92
		30"(762mm)		NEKP-30-4	348.73	359.51
		36"(914mm)		NEKP-36-4	355.92	369.10
		42"(1067mm)		NEKP-42-4	363.11	378.69
		48"(1219mm)		NEKP-48-4	370.30	388.28
		60"(1524mm)		NEKP-60-4	384.68	407.46

NEKP-2
NEKP-4



Features

- Includes one power distribution assembly (PDA), one NEF-1 flexible power connector and one two-sided powered raceway cover.
 - Connector
 - 2+2 flex power NEF-1-2
 - 3+1 flex power NEF-1-4
- Convert non-powered panels to powered panels.
- Available on RUSH.

To Order, Specify:


- Product number.
- Trim color.

Specification Tips

- Flexible power connectors provided with retrofit kit will accommodate straight in-line or inside 90° or 120° conditions. Refer to NES-1-2 or NES-1-4 flexible power connectors for other applications.
- Specify triplex receptacles for use with monolithic panels and super base panels.**
- Do not mix 3-circuit with 4-circuit components. Do not mix 2+2 and 3+1 components. Components have unique polarity key and color coding (3-circuit=black, 2+2=blue and 3+1=green).

PREMISE Electrical Components

Base Raceway Covers — base raceway power application

	Width	Number	Trim A	B
Raceway Cover without Power/Communications Access  NRC-NNNN	18"(457mm)	NRC-18-NNNN	\$28.39	\$30.85
	24"(610mm)	NRC-24-NNNN	33.11	36.79
	30"(762mm)	NRC-30-NNNN	37.83	42.73
	36"(914mm)	NRC-36-NNNN	42.55	48.67
	42"(1067mm)	NRC-42-NNNN	47.27	54.61
	48"(1219mm)	NRC-48-NNNN	51.99	60.55
	60"(1524mm)	NRC-60-NNNN	61.43	72.43


Features

- Includes one plastic raceway cover without cutouts for receptacle access.
- May be provided for field porting if used with communication face plates.

Available on RUSH.

To Order, Specify:

- Product number.
- Trim color.


Raceway Cover with Power Access – One Side  NRC-NNPN	24"(610mm)	NRC-24-NNPN	\$44.92	\$48.60
	30"(762mm)	NRC-30-NNPN	49.64	54.54
	36"(914mm)	NRC-36-NNPN	54.36	60.48
	42"(1067mm)	NRC-42-NNPN	59.08	66.42
	48"(1219mm)	NRC-48-NNPN	63.80	72.36
	60"(1524mm)	NRC-60-NNPN	73.24	84.24

Feature

- Includes one plastic raceway cover with receptacle cutouts/covers for power receptacle access on one side.

To Order, Specify:

- Product number.
- Trim color.

Raceway Cover with Power Access – Two Sides  NRC-PNPN	24"(610mm)	NRC-24-PNPN	\$56.73	\$60.41
	30"(762mm)	NRC-30-PNPN	61.45	66.35
	36"(914mm)	NRC-36-PNPN	66.17	72.29
	42"(1067mm)	NRC-42-PNPN	70.89	78.23
	48"(1219mm)	NRC-48-PNPN	75.61	84.17
	60"(1524mm)	NRC-60-PNPN	85.05	96.05


Feature

- Includes one plastic raceway cover with receptacle cutouts/covers for power receptacle access on both sides.

Available on RUSH.

To Order, Specify:

- Product number.
- Trim color.

Raceway Cover with Power and Single Gang Communications Access – One Side  NRC-NNPC	30"(762mm)	NRC-30-NNPC	\$61.45	\$66.35
	36"(914mm)	NRC-36-NNPC	66.17	72.29
	42"(1067mm)	NRC-42-NNPC	70.89	78.23
	48"(1219mm)	NRC-48-NNPC	75.61	84.17
	60"(1524mm)	NRC-60-NNPC	85.05	96.05

Feature

- Includes one plastic raceway cover with receptacle cutouts/covers for power and a cutout for a single gang adaptor plate (included) for communication faceplate access on one side.

To Order, Specify:

- Product number.
- Trim color.


Specification Tips

- Punched opening for communication measures 2.25"(57mm) x 3.75"(95mm).
- Inside opening of adaptor plate measures 2.00"(51mm) x 2.81"(75mm).
- Specify when no raceway cover is ordered with a foundation element (no raceway cover option).

PREMISE Electrical Components

Base Raceway Covers — base raceway power application

	Width	Number	Trim A	B
Raceway Cover with Power and Single Gang Communications Access – Two Sides	36"(914mm)	NRC-36-PCPC ■	\$ 89.79	\$ 95.91
	42"(1067mm)	NRC-42-PCPC ■	94.51	101.85
	48"(1219mm)	NRC-48-PCPC ■	99.23	107.79
	60"(1524mm)	NRC-60-PCPC ■	108.67	119.67



NRC-PCPC

Features

- Includes one plastic raceway cover with receptacle cutouts/covers for power and a cutout for two single gang adaptor plates (included) for communication faceplate access on both sides for plate screw mounting. ■ Available on RUSH.


To Order, Specify:

- Product number.
- Trim color.

Specification Tips

- Punched opening for communication measures 2.25"(57mm) x 3.75"(95mm).
- Inside opening of adaptor plate measures 2.00"(51mm) x 2.81"(71mm).
- Specify when no raceway cover is ordered with a foundation element (no raceway cover option).

Raceway Cover with Power and Modular Furniture Telecommunications Outlet Plate Communication Access – One Side	30"(762mm)	NRC-30-NNPF	\$61.45	\$66.35
	36"(914mm)	NRC-36-NNPF	66.17	72.29
	42"(1067mm)	NRC-42-NNPF	70.89	78.23
	48"(1219mm)	NRC-48-NNPF	75.61	84.17
	60"(1524mm)	NRC-60-NNPF	85.05	96.05



NRC-NNPF


Features

- Includes one plastic raceway cover with receptacle cutouts/covers for power and a cutout for modular furniture telecommunications outlet plate access on one side.

To Order, Specify:

- Product number.
- Trim color.

Raceway Cover with Power and Modular Furniture Telecommunications Outlet Plate Communication Access – Two Sides	30"(762mm)	NRC-30-PFPF	\$ 85.07	\$ 89.97
	36"(914mm)	NRC-36-PFPF	89.79	95.91
	42"(1067mm)	NRC-42-PFPF	94.51	101.85
	48"(1219mm)	NRC-48-PFPF	99.23	107.79
	60"(1524mm)	NRC-60-PFPF	108.67	119.67



NRC-PFPF

Features

- Includes one plastic raceway cover with receptacle cutouts/covers for power and a cutout for modular furniture telecommunications outlet plate access on both sides.

To Order, Specify:


- Product number.
- Trim color.

Specification Tips

- Punched opening for information plate snap mounting measures 1.38"(35mm) x 2.70"(69mm).
- Specify when no raceway cover is ordered with a foundation element (no raceway cover option).

PREMISE Electrical Components


Power and Communication Accessories

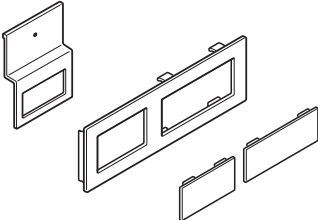	Description	Number	Price
Power and Communication Bezel for Fabric/Tackable Pad  NEAP-0000	Power and Communication Bezel	NEAP-0000	\$128.54
	<p>Features</p> <ul style="list-style-type: none"> • Power and Communication Bezel includes four non-handed bezels, four receptacle blank plates, four data blank plates, four data mounting brackets and mounting hardware. • Power and Communication Bezels provide outer ports for power access and inner ports for communication access. <p>To Order, Specify:</p> <ol style="list-style-type: none"> 1) Product number. 2) Non-Metallic trim color (bezel and blank plates). <p>Specification Tips</p> <ul style="list-style-type: none"> • To be used with Fabric/Tackable Pad only. • Monolithic Single Pad 30"(762mm) wide fabric/tackable pad can accommodate one bezel at beltline and standing height. • 36"-60"(914mm-1534mm) wide can accommodate two bezels at beltline and at standing height. • For Monolithic Single Pad standing height power location can only be offered in 64"(1626mm) height pad. • Bezel communication port opening accepts furniture data plates on data mounting bracket which must be installed on the cable trough. • The blank cover attaches to the bezel and does not require the data mounting bracket. • Power and Communication Bezels can be used in back-to-back applications. • Must be used in conjunction with separately specified Power Kits and Triplex Receptacles. 		

Electrical and Communication Accessories

Desktop Ports, Power/Data Dome and Grommet

	Description	Height	Width	Number	Price
Desktop Port	Desktop Port with 6'(1829mm) cord	3 1/2"(89mm)	9 5/8"(244mm)	BEDP-6	\$320.46
	Desktop Port with 12'(3658mm) cord			BEDP-12	320.46



BEDP

Class IF – SIN 711-1;
Discount Group XII



Features

- 6'(1829mm) or 12'(3658mm) black cord option.
- Three power outlets and one modular furniture telecommunications outlet opening [1.38"(25mm) x 2.71"(69mm)] with blank cover.
- Mounts on worktops from 3/4"(19mm) to 1 3/4"(44mm) thick.
- Not available for use in Los Angeles, Chicago or New York.
- Power can be routed from panel, floor or wall.
- Allows for off-modularity.
- Module and bracket available in graphite finish only with black cord.
- **Not for power sources other than 120 volt 60 hertz.**
- Shipped assembled.


To Order, Specify:

- 1) Product number.
(No finish specification required.)

Specification Tips

- Attaches to back edge of worktop with threaded knob.
- Power cord plugs into receptacle outlet or into a building outlet. Desktop ports cannot be linked together.
- Communication info plates must be field supplied.
- Cord use should be reviewed by local authorities (electrical inspector) prior to ordering.

	Description	Number	Price
Power/Data Dome	Two (2) power outlets and two (2) plates for data connection	JAP-2	\$193.44
	Four (4) power outlets	JAP-4	211.12




JAP-2

JAP-4

JAP-2 Data Connection Cutout Sizes

Frame Dimensions



It is recommended that the cutout sizes are confirmed before ordering connectors from suppliers.

Class FM – SIN 711-2;
Discount Group II



Features

- Provides power and communication access at desk height.
- Field installed. Mounts into 3"(76mm) diameter hole.
- Available in black finish color only.
- Power cord is 72"(1829mm) long.
- Cut for cutouts for data connectors.
- 4TWP-2 includes a voice/data adapter kit to accept couplers and jacks.

To Order, Specify:

- 1) Product number.
(No finish specification required.)

	Height	Inside Diameter	Outside Diameter	Number	Price
Worksurface Grommet	1"(25mm)	2 3/4"(70mm)	3"(76mm)	WUAC-WSG	\$19.77



WUAC-WSG

Class CA – SIN 711-2;
Discount Group I

Features

- Includes one cover.
- Must be field-installed.
- ◆ Available on RUSH.

To Order, Specify:

- 1) Product number.
(No finish specification required.)


Specification Tip

- Available in charcoal color only.


Electrical and Communication Accessories

Desktop Ports, Power/Data Dome and Grommet

	Height	Width	Depth	Cord Length	Number	① Price
Enhanced Power Module	With Plug					
	3 1/2"(89mm)	6 3/4"(171mm)	3 1/2"(89mm)- 4 1/2"(114mm)	6'(1829mm)	EUD1-0000-1311V ■	\$431.53
				12'(3658mm)	EUD1-0000-1311W ■	480.41
	Hardwire					
	3 1/2"(89mm)	6 3/4"(171mm)	2 1/4"(57mm)	6'(1829mm)	EUD1-0000-C311V ■	\$492.81



EUD1-0000-1311V



EUD1-0000-C311V

Features

- Includes power module with three simplex outlets (NEMA 5-15R) and one data location, multiple data jack adapters to accommodate most varieties of field supplied data jacks, mounting hardware, optional standard plug (NEMA 5-15P) or hardwire connection.
- Designed to deliver electrical and data access to the work station.
- Attaches to the back edge of the worksurface.
- Corded power module available with 15amp - 6'(1829mm) or 12'(3658mm) long cord with plug.
- Hardwired power module available with 6'(1829mm) long flexible metal conduit feed with wires for hardwire application.
- Option of black anodized housing with black receptacles or clear anodized housing with white receptacles.

To Order, Specify:

- 1) Product number, including:

① Color Option:








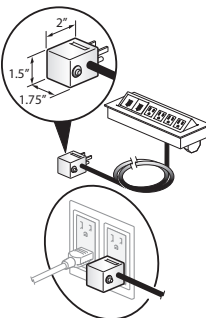
- B** Black
W White

Specification Tips

- Accommodates worksurface thicknesses from 1 3/16"(30mm) to 2"(51mm).
- Attachment hardware allows for installation above or below work surface, with or without tackboards, to back side of lower storage units, and with vertical storage units that have back edge clearance.
- For use with 120 volt 60 hertz power source only.
- Enhanced Power module applications should be reviewed by local authorities (electrical inspector) prior to ordering.
- Requires field installation.

Electrical and Communication Accessories

Flip Top Units

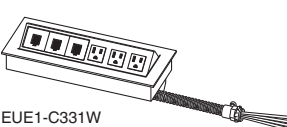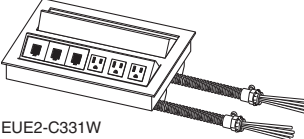	Width	Bezel Depth	Configuration	Number	Price
Flip Top Unit  EUE1-1111W  EUE1-1B01W  EUE1-1331W  EUE2-1331W  EUE1-C331W  EUE2-C331W   Fused Plug Detail	Corded Single-Sided Outlets				
	5 5/16"(133mm)	4 3/8"(111mm)	1 Power, 1 Data	EUE1-0000-1111W	\$ 394.78
			2 Power, 0 Data	EUE1-0000-1B01W	394.78
	8 5/16"(211mm)	4 3/8"(111mm)	2 Power, 2 Data	EUE1-0000-1221W	\$ 473.48
			3 Power, 1 Data	EUE1-0000-1311W	473.48
	11 1/4"(286mm)		3 Power, 3 Data	EUE1-0000-1331W	\$ 473.48
			4 Power, 2 Data	EUE1-0000-1421W	473.48
	Corded Double-Sided Outlets				
	8 5/16"(211mm)	8"(203mm)	2 Power, 2 Data	EUE2-0000-1221W	\$ 946.95
			3 Power, 1 Data	EUE2-0000-1311W	946.95
	11 1/4"(286mm)		3 Power, 3 Data	EUE2-0000-1331W	\$ 946.95
			4 Power, 2 Data	EUE2-0000-1421W	946.95
	Hardwire Single-Sided Outlets				
	8 5/16"(211mm)	4 3/8"(111mm)	2 Power, 2 Data	EUE1-0000-C221W	\$ 540.32
	11 1/4"(286mm)		3 Power, 3 Data	EUE1-0000-C331W	\$ 540.32
	Hardwire Double-Sided Outlets				
	8 5/16"(211mm)	8"(203mm)	2 Power, 2 Data	EUE2-0000-C221W	\$1080.63
	11 1/4"(286mm)		3 Power, 3 Data	EUE2-0000-C331W	\$1080.63

Features

- Hardwire flip top unit includes one flip top unit with power outlets and communication openings, mounting clips, 6 foot flexible metal conduit feed with wires for hardwire, multiple data jack adapters to accommodate most varieties of field supplied data jacks, also includes blank data covers.
- Corded flip top unit includes one flip top unit with power outlets and communication openings, 12 foot long – 15-amp cord with plug, mounting clips, multiple data jack adapters to accommodate most varieties of field supplied data jacks, also includes blank data covers.
- Flip top unit is flush mounted with spring release cover.
- Flip top unit overall height is 2 3/4"(70mm) and will extend below the table tops.
- Standard in anodized finish.
- Ships assembled.
- Available on RUSH.

To Order, Specify:

- 1) Product number.
(No finish specification required.)


Specification Tips

- Flip top unit plug-in cord drops down from bottom of unit to plug into external power outlet.
- Flip top unit must be field installed on worksurfaces by field cutting hole.
- For use with 120 volt 60 hertz power source only.
- Applications should be reviewed by local authorities (electrical inspector) prior to ordering to verify use is acceptable.
- Corded flip top units with four receptacles utilize a fused plug that may block adjacent building receptacle outlet.

Electrical and Communication Accessories

Wire Managers

	Height	Depth	Width	Number	Price
Vertical Wire Manager	60"(1524mm)	5/8"(16mm)	1"(25mm)	NEV-1 ■	\$46.75



NEV-1

Class FA – SIN 711-1;
Discount Group XI

Features

- Includes one vertical wire manager and six attachment clips.
- Guides wires or cables vertically from base raceway to worksurface or from worksurface to overhead storage unit or shelf.
- Two wire managers will fit in a single set of panel slots.
- For wire management refer to cable management in Specification Guide.

■ Available on RUSH.


To Order, Specify:

- 1) Product number.
- 2) Trim color (standard trim only).

Specification Tips

- May be field cut to appropriate length. Requires two attachment clips per field cut section.
- Wire manager may be installed in same connector slots with shared or handed cantilever support.

	Height	Inside Diameter	Number	Price
Vertical Wire Manager	17 1/2"(444mm)	7/16"(11mm)	NEV-2 ■	\$113.35



NEV-2

Class FA – SIN 711-1;
Discount Group XI

Features

- Includes ten vertical wire managers.
- Vertically routes and conceals cords along panel surface above or below the worksurface.
- Wire manager, NEV-2, extends 1/2"(13mm) from panel surface.
- Standard in black trim only.

■ Available on RUSH.


To Order, Specify:

- 1) Product number.
(No finish specification required.)

Specification Tips

- Suggested application: use to conceal single task light cord between overhead storage and worksurface.
- May be field cut to appropriate size.
- For NEV-2, panel connectors slots will accommodate a wire manager and one adjacent panel mounted component.

	Depth	Width	Height	Number	Price
Horizontal Wire Manager	2"(51mm)	15"(381mm)	3"(76mm)	WUAW-1500-PNH ■	\$150.80



WUAW

Class CA – SIN 711-1;
Discount Group I

Features

- Includes a set of ten, plastic wire managers and mounting screws.
- Manages and stores wire and cables under worksurfaces.
- Standard in Black trim.

■ Available on RUSH.

To Order, Specify:

- 1) Product number.
(No finish specification required.)

	Height	Inside Diameter	Outside Diameter	Number	Price
Worksurface Grommet	1"(25mm)	2 3/4"(70mm)	3"(76mm)	WUAC-WSG ■	\$19.77



WUAC-WSG

Class CA – SIN 711-1;
Discount Group I

Features

- Includes one cover.
- Must be field-installed.
- Available in Charcoal color only.

■ Available on RUSH.

To Order, Specify:

- 1) Product number.
(No finish specification required.)

	Width	Installed Height	Number	Price
Wire Management Loop	2 3/4"(70mm)	4 1/2"(114mm)	NEH-8 ■	\$36.22



NEH-8

Class CA – SIN 711-1;
Discount Group I

Features

- Includes box of eight wire management loops.
- Manages and stores wires or cables through loops under worksurfaces or desk tops.
- Threaded top allows installation anywhere under worksurfaces in recommended 18"(457mm) intervals.
- Loop capacity: 62 category 5 communication cables.
- Standard in charcoal trim color only.
- Wire management loop in 2"(51mm) in diameter with 3.1 sq. inches of cross section area.



■ Available on RUSH.


To Order, Specify:

- 1) Product number.
(No finish specification required.)

Electrical and Communication Accessories

Port Kits


	Height	Width	Description	Number	Price
Monolithic Panel Communications Port Kit	5"(127mm)	3 1/4"(83mm)	For Info Plate	NEC-1 	\$61.94
	3 3/4"(95mm)	3 1/4"(83mm)	For Single Gang Outlet	NEC-2 	61.94



NEC

Features

- Includes outlet plate mounting bracket, face plate, and mounting template.
- Two types are available to accommodate the following connector modules:
 - One information plate opening, 1.38"(35mm) wide x 2.70"(69mm) high.
 - One single gang outlet face plate opening, 2"(51mm) wide x 2 3/4"(70mm) high.
- Provides communication access on the panel face of fabric surface Monolithic to communication cables routed in the top cable pathway or bottom raceway.
- May be located 2"(51mm) in from the edge of the panel, 18"(457mm), 34"(864mm), and 43"(1092mm) up from the bottom (to bottom of port) of the base raceway.
- Standard in charcoal trim color only.



 Available on RUSH.


To Order, Specify:

- 1) Product number.
(No finish specification required.)


Specification Tips

- May be installed on the left or right side of the panel face.
- May be installed back-to-back.
- Requires field modification of the panel.
- Communications information plates are not provided by Haworth and must be purchased separately.

Information Plate Communication Port Kits	2 3/4"(70mm)	4"(102mm)	For Info Plate	NECK-1 	\$57.26
	2 1/8"(54mm)	4 1/8"(105mm)	For Standard Outlet	NECK-2 	79.47



NECK-1



NECK-2

Features

- Provides communications port on stack kit pad face.
- Two types are available:
 - NECK-1 provides front and back mounting frames.
 - NECK-2 provides a backer plate.

 Available on RUSH.

To Order, Specify:





- 1) Product number.
- 2) Trim color (standard trim only).

Specification Tips

- Requires a field-cut hole 2 1/2"(61mm) high x 3 5/8"(92mm) wide.
- Field-cut hole must be a minimum of 3"(76mm) from the perimeter of the pad to maintain structural stability.
- Communications information plates are not provided by Haworth and must be purchased separately.
- Verify clearance with any power components that may be mounted behind pad.
- For use with fabric tackable and fabric acoustical tackable pads only.

Electrical and Communication Accessories


Cable Management

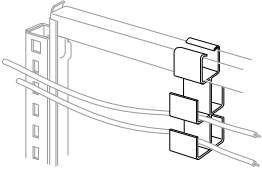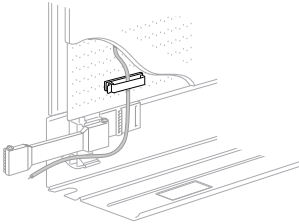	Height	Depth	Width	Number	Price
Cable Hanger  NECH-1 NOTE: Two cable hangers ship with every powered stack kit.	4"(102mm)	2"(51mm)	2"(51mm)	NECH-1 ■	\$37.40
Features <ul style="list-style-type: none"> Includes package of six cable hangers. Provides holding place for communications cables within stack kit. Snaps on the horizontal cross bar. Standard in black trim color only. See the Cable Management section in the Specification Guide for cable capacity. To Order, Specify: <ol style="list-style-type: none"> Product number. (No finish specification required.) 					
■ Available on RUSH.					
Specification Tip <ul style="list-style-type: none"> Use for 18"(457mm) panel applications when cable routing is required. 					
Vertical Cable Guide  NECG-V NOTE: One vertical cable guide ships with every super base panel. Order additional as needed.	3/4"(19mm)	1/2"(13mm)	3"(76mm)	NECG-V	\$50.24
Features <ul style="list-style-type: none"> Includes package of twelve cable guides. Manages communications cables vertically. Self-adhesive back attaches to the top or bottom of a base panel frame, or a horizontal cross bar. Standard in gray trim color only. See the Cable Management section in the Specification Guide for cable capacity. To Order, Specify: <ol style="list-style-type: none"> Product number. (No finish specification required.) 					
Single Gang Communication Adaptor Plate  NECB-2					
Features <ul style="list-style-type: none"> Includes one communication adaptor plate. Provides retrofit mounting location for standard single-gang outlet size communications plate on painted, wood or markerboard pads and/or base raceway covers. Standard wall outlet size: 2 1/4"(57mm) high by 3 3/4"(95mm) wide (NEMA WD-6 specification). Self locates behind communications pad for screw attachment. Standard in black trim color only. To Order, Specify: <ol style="list-style-type: none"> Product number. (No finish specification required.) 					
■ Available on RUSH.					
Specification Tips <ul style="list-style-type: none"> Field porting required. Not recommended for fabric pads. 					
Cable Trough  NEC4	1 1/2"(38mm)	1 1/2"(38mm)	24"(610mm)	NEC4-24	\$65.46
			30"(762mm)	NEC4-30	66.87
			36"(914mm)	NEC4-36	68.28
			42"(1067mm)	NEC4-42	69.69
			48"(1219mm)	NEC4-48	71.10
			60"(1524mm)	NEC4-60	73.92
Features <ul style="list-style-type: none"> Includes one trough and mounting hardware. Provides horizontal routing of communications cables within stack kit and mounting location for beltline and standing-height power distribution assembly. Mounts on the stack kit vertical cross bar members. Standard in charcoal trim color only. See the Cable Management section in the Specification Guide for cable capacity. To Order, Specify: <ol style="list-style-type: none"> Product number. (No finish specification required.) 					
Specification Tip <ul style="list-style-type: none"> To be used with PREMISE power and communications technology pads only. 					


Electrical and Communication Accessories

Cable Management

	Height	Depth	Width	Number	Price
Cable Reel	5"(127mm)	2"(51mm)	4"(102mm)	NECR-1 ■	\$64.27



NECR-1
Right-side up application



Upside down application

Features


- Includes one reel.
- Provides bulk storage of copper and fiber cables.
- Mounts right-side up on a horizontal cross bar. Can also be mounted upside down on a horizontal cross bar between two stack kits.
- Standard in charcoal finish color only.
- See the Cable Management section in the specification guide for cable capacity.

■ Available on RUSH.

To Order, Specify:

- 1) Product number.
(No finish specification required.)

Straight Cable Guide	3"(76mm)	7/16"(11mm)	1"(25mm)	NECG-3-S	\$79.46
	5"(127mm)			NECG-5-S	79.46



NECG-3-S
NECG-5-S

Features


- Includes package of twelve guides.
- Provides concealed routing of communications cables or flex connector between stack kits in a straight connection, or the outside of a two-way or three-way connection.
- Mounts in the connector slots.
- Standard in charcoal trim color only.
- See the Cable Management section in the specification guide for cable capacity.
- Cannot be used with conduit connectors or 10"(254mm) slat pads.

To Order, Specify:

- 1) Product number.
(No finish specification required.)

NOTE:
5"(127mm) straight cable guides
ship with power kits.

90° Corner Cable Guide	3"(76mm)	7/8"(22mm)	7/8"(22mm)	NECG-3-C	\$79.46
	5"(127mm)			NECG-5-C	79.46



NECG-3-C
NECG-5-C

Features

- Includes package of twelve guides.
- Provides concealed routing of communications cables or flex connector between stack kits at a two-way or three-way connection.
- Mounts in the connector slots.
- Standard in charcoal trim color only.
- See the Cable Management section in the specification guide for cable capacity.

To Order, Specify:

- 1) Product number.
(No finish specification required.)

NOTE:
5"(127mm) corner cable guides
ship with power kits.


Specification Tips

- Cable bend radius is less than 1"(25mm), see Cable Management section in the specification guide for proper cable routing to meet ANSI minimum standard.
- Cannot be used with conduit connectors.




PREMISE Power Distribution for Hardwire Applications




Infeeds	Applications
1 Base Feed	48"(1219mm) or as required
2 Top Feed	Ceiling Height (H) + 18"(457mm)

Panel Applications	Panel Applications
3 Between two junction boxes on one panel	Panel Width (W) - 23"(584mm)
4 Between junction boxes if one per panel	Panel Width (W) - 5"(127mm)
5 Across panel-panel connection	12 1/2"(318mm)
6 Across 3- or 4-Way connection	16 1/2"(419mm)
7 Base to Work-Height	44"(1118mm)
8 Base to standing height	60"(1524mm)
9 Work-Height/Work-Height	88"(2235mm)

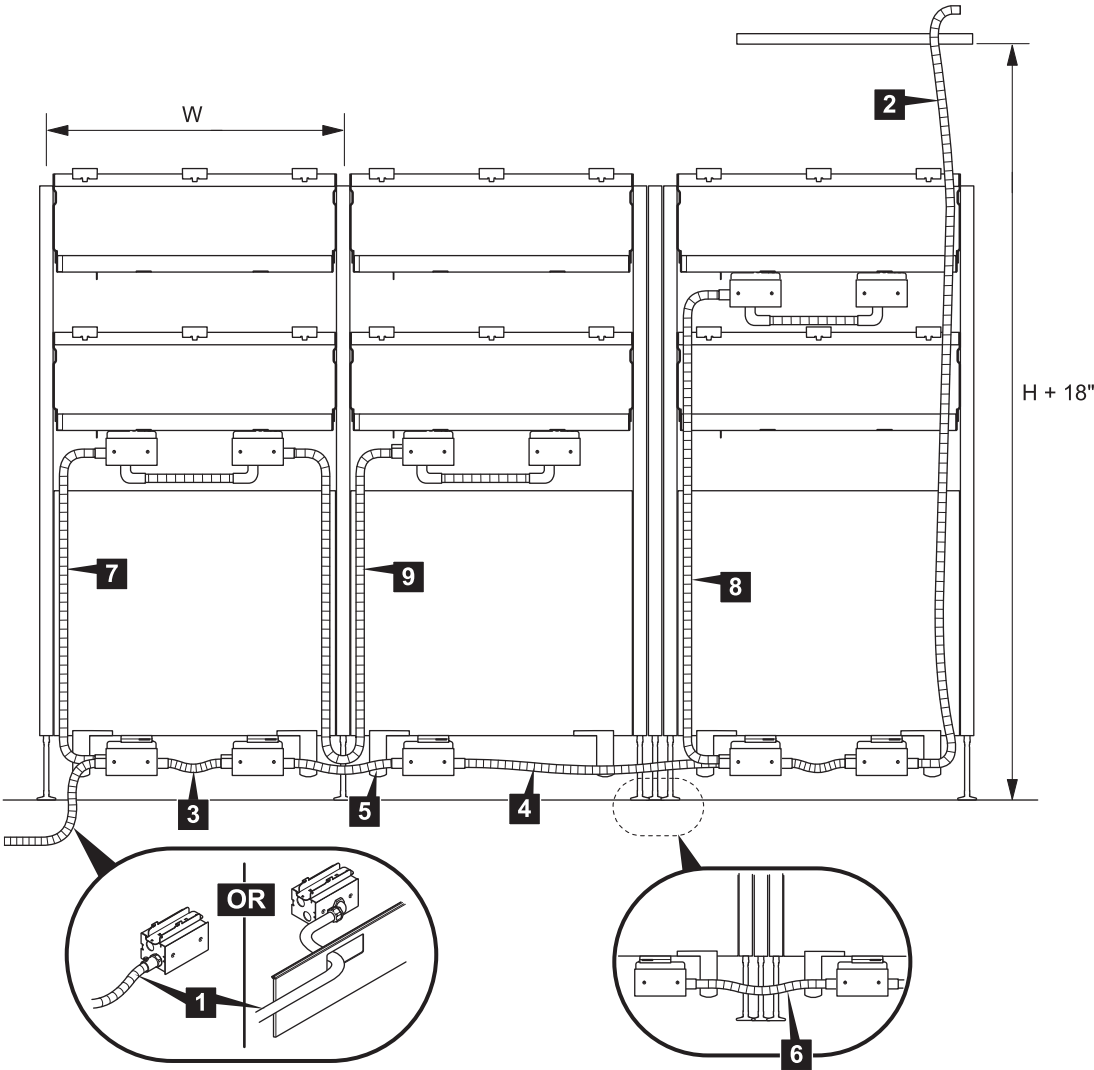

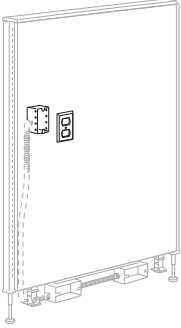




PREMISE Hardwire Electrical Components


	Description	Number	Price
 NEB-1-M	Base Feed Module		
	Monolithic	NEB-1-M	\$434.70
	Super Base	NEB-1-S	434.70
 NEB-1-S			
	Features <ul style="list-style-type: none">Includes one electrical box with 1/2"(13mm) knockouts, one base feed cover plate, one blank plate and panel mounting hardware.For panel hardwire connection to floor, column or wall.	To Order, Specify: <ol style="list-style-type: none">Product number.Trim color (standard only).	
	Specification Tips <ul style="list-style-type: none">Order monolithic or super base kit depending on application.Conduit, fittings, and receptacle are field supplied.		
			

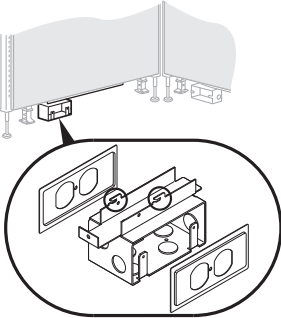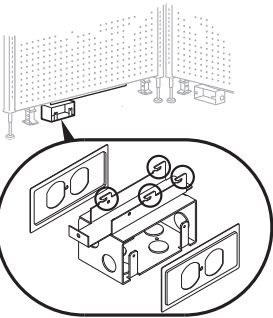 NEKC-00-PMP	Electrical Raceway Kit — Base		
	Monolithic	NEKC-00-PM	\$412.50
	Super Base	NEKC-00-PS	412.50
 NEKC-00-PS			
	Features <ul style="list-style-type: none">Includes one electrical box with 1/2"(13mm) knockouts, two receptacle plate covers and panel mounting hardware.For base panel receptacle access.	To Order, Specify: <ol style="list-style-type: none">Product number.Trim color for receptacle covers (standard trim only).	
	Specification Tips <ul style="list-style-type: none">Order monolithic or super base kit depending on panel type.Powered raceway cover ordered separately.Conduit, fittings, and receptacle are field supplied.		
			


PREMISE Hardwire Electrical Components

	Description	Number	Price
 <p>NEKD-00-PC</p> 	Electrical Raceway Kit — Beltline or Standing Height	NEKD-00-PC	\$412.50
	Features <ul style="list-style-type: none"> Includes one electrical box with 1/2"(13mm) knockouts, two receptacle plate covers, and mounting hardware. For beltline panel receptacle access. 	To Order, Specify: <ol style="list-style-type: none"> Product number. Trim color for receptacle cover (standard trim only). 	
	Specification Tips <ul style="list-style-type: none"> Electrical box mounting trough ordered separately. Conduit, fittings, and receptacle are field supplied. 		
 <p>NEEA-1-C</p> 	Powered Panel Port Kit	NEEA-1-C	\$148.40
	Features <ul style="list-style-type: none"> Includes junction box, cover plate, receptacle, mounting hardware and template. Flush mounts to surface of powered, fabric-surface panel. Provides plug-in location above or below a panel-attached worksurface. Note: mounts only below worksurface on 42"(1067mm)-high panel. May be installed on the left or right side of the panel face. Cannot be installed back-to-back. Requires field modification of the panel. 	To Order, Specify: <ol style="list-style-type: none"> Product number. Trim color for receptacle cover (standard trim only). 	
	Specification Tips <ul style="list-style-type: none"> For use on monolithic panels only. Conduit, fittings, and receptacle are field supplied. 		
 <p>NERC-1-C</p>	Receptacle Cover	NERC-1-C	\$42.07
	Work-Height/Base Raceway Application	To Order, Specify: <ol style="list-style-type: none"> Product number. Trim color (standard trim only). 	
	Features <ul style="list-style-type: none"> To be used with duplex receptacle. Duplex receptacle not included. 		

PREMISE Hardwire Electrical Components

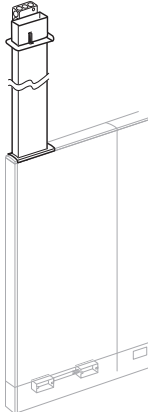

NETM-NT
NETM-NW



Panel Height	Pole Length	Number	Trim A	B
10' Ceiling Height				
42"(1067mm) - 53"(1346mm)	95"(2413mm)	NETM-5300-NT	\$616.72	\$746.54
64"(1626mm) - 80"(2032mm)	66"(1676mm)	NETM-8000-NT	568.66	666.35
12' Ceiling Height				
42"(1067mm) - 53"(1346mm)	119"(3023mm)	NETM-5300-NW	\$646.53	\$804.91
64"(1626mm) - 80"(2032mm)	95"(2413mm)	NETM-8000-NW	598.47	724.72

Features

- Includes electrical box, bezel plates, vertical raceway and installation hardware.
- Removable cover on poles provides access to pathway.
- Required when the building power source is located in the space above the ceiling.
- Routes power and communication from the ceiling to the panel base raceway.
- Maximum 12"(305mm) ceiling height.

To Order, Specify:

- Product number.
- Trim color.

Specification Tips

- For installation on monolithic panels no less than 24"(610mm) wide.
- Can be used with fabric monolithic panels only.
- Can be used with standard, grooved or wood top cap.
- Conduit is field supplied.**

Stack Kit on Monolithic or
Super Base Panel Top
Feed Module

NETP-NT
NETP-NW

10' Ceiling Height

48"(1219mm)	95"(2413mm)	NETP-4800-NT	\$666.15	\$801.92
64"(1626mm) - 80"(2032mm)	66"(1676mm)	NETP-8000-NT	609.19	706.88

12' Ceiling Height

48"(1219mm)	119"(3023mm)	NETP-4800-NW	\$695.96	\$860.29
64"(1626mm) - 80"(2032mm)	95"(2413mm)	NETP-8000-NW	639.00	765.25

Features

- Includes electrical box, bezel plates, vertical raceway and installation hardware.
- Removable cover on poles provides access to pathway.
- Required when the building power source is located in the space above the ceiling.
- Routes power and communication from the ceiling to the panel base raceway.
- Maximum 12"(305mm) ceiling height.

To Order, Specify:


- 1) Product number.
- 2) Trim color.

Specification Tips

- For installation on monolithic or super base panels no less than 24"(610mm) wide.
- Can be used with standard, grooved or wood top cap.
- **Conduit is field supplied.**
- Mounts to the stack kit cross bar 6"(152mm) from panel end.

PREMISE Hardwire Electrical Components

	Ceiling Height	Number	Price
External Top Feed Module	10'(3048mm)	NETX-10-C	\$690.61

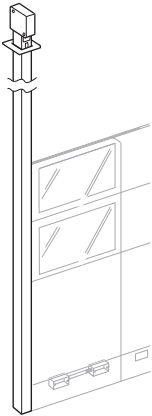

NETX-10-C



Features

- Includes electrical box, bezel plates, vertical raceway and installation hardware.
- Use when stackable panels include open or glazed stack kits.
- Required when the building power source is located in the space above the ceiling.
- One channel routes power and communications from the ceiling to the base raceway on any panel configuration including open or glazed stack kits.
- **Routes power and communication from the ceiling to the base raceway only at the end of the panel.**
- Maximum 10'(3048mm) ceiling height.

To Order, Specify:

- 1) Product number.
 - 2) Trim color.*
- *Note:** Upcharge list for Metallic trim color
Top feed module = **\$44.10.**

Specification Tips

- Can be used with standard, grooved or wood top cap.
- Does not occupy receptacle port.
- Communication cables exit at base only.
- Can be used in 2- and 3-way conditions by adding additional connector. See specification guide for information.
- **Conduit is field supplied.**

International Power Components


For power applications outside North America we recommend the use of **Power Logic** soft wiring components. Power Logic offers a system of single circuit power cords and receptacle modules that fit into our non-powered base raceway. Receptacle modules are offered with two sockets (3 and 4 socket versions also available). Each receptacle module has sockets, switches and fuses that are appropriate for each country around the world. Contact the Power Logic regional sales office in your area to help with planning details to assure local electrical code compliance. Contact Power Logic via the Haworth/Power Logic website, (www.powerlogic.net), or through their corporate offices in Cape Town, South Africa at 27-21-704-1450. Power Logic also offers power solutions for desktop, conference table or freestanding power applications.



Power Entry Cord



Cord



Receptacle






Splitter

To route a Power Logic power entry cord from a ceiling, order a hardwire top feed module to conceal the cord. To mount a Power Logic receptacle at the base raceway, order a non-powered raceway cover and cut appropriate-sized knockout in the field. To mount a Power Logic receptacle in a fabric tile, order standard fabric tile and cut appropriate-sized knockout in the field.

Adaptable Worksurfaces — Laminate

Rectangular



WURA

Features

- Includes worksurface and tie plate.
 - Laminate with:
 - Full perimeter T-mold (T), or
 - 3mm edgeband (J) or knife edge (F) on user edge and 1mm edgeband on sides and back, or
 - Cascade (V) on user edge and 1mm edgeband on sides and back.
 - Worksurfaces predrilled to accept most support options.
 - Optional wireway along back edge of worksurface is color-matched to solid side/back edge trim. When wood grain edge trim is specified, wireway will be Charcoal. Refer to Specification Guide for wireway details.
 - 24”(607mm)- to 60”(1524mm)-wide worksurfaces have one wireway.
 - Worksurfaces wider than 60”(1524mm) have two wireways.
 - **Installed worksurfaces without wireway will not allow clearance for power plug.**
 - Depths and widths shown in nominal dimensions.
 - Worksurfaces 36”(914mm) wide and above are drilled for pedestals.
- ◆ Available on RUSH with Standard Core.

Specification Tips

- For additional widths to span a 3-way panel condition, refer to panel-specific worksurface section.
- **Worksurface support specific to product line and worksurface edge guidelines; must be separately specified; refer to Specification Guide for support and load.**
 - Cantilever brackets
 - Side brackets
 - Worksurface support panel
 - Support column or support leg
 - Attached lower storage
- Knife edge requires use of worksurface supports for that application; worksurface support panel and/or side brackets for use with knife edge.
- Mini cantilever brackets are for use with 18”(457mm) deep worksurfaces with knife edge only.
- Intermediate support is required for unsupported worksurface span greater than 60”(1524mm).

Note: Separately specified worksurface reinforcement channels provide additional support for worksurfaces with 50”(1270mm) spans that are heavily loaded and not otherwise supported by mid-span cantilevers, worksurface support panels, columns, legs or attached lower storage.

To Order, Specify:

T-Mold, Edgeband, or Knife

- 1) Product number.
- 2) Laminate surface color.
- 3) Edge trim color for T, J and F.

Cascade

- 1) Product number.
- 2) Laminate surface color.
- 3) Side/back edgeband trim color.
- 4) Front Cascade edge trim color for V1 and V2.

Note: Cascade translucent edge is priced as V2.

1 Edge Options:

- T** T-Mold
- J** Edgeband
- V** Cascade
- F** Knife

2 Core Option:

- S** Standard ◆
- G** Green, add **\$109.26** list.

3 Wireway Options:

- A** Notched
- B** Curved
- C** Without

Adaptable Worksurfaces — Laminate

Rectangular

Depth	Width	Number	①②③	Laminate A					Laminate B				
				T	J	V1	V2	F	T	J	V1	V2	F
18"(457mm)	24"(610mm)	WURA-1824-L		\$182.37	\$187.50	\$223.53	\$253.99	\$ 283.70	\$197.08	\$202.21	\$238.24	\$268.70	\$ 298.41
	27"(686mm)	WURA-1827-L		196.65	201.94	239.81	270.27	301.48	212.47	217.76	255.63	286.09	317.30
	30"(762mm)	WURA-1830-L		211.38	216.91	257.54	288.00	321.46	228.31	233.84	274.47	304.93	338.39
	33"(838mm)	WURA-1833-L		226.11	231.88	275.27	305.73	341.44	244.15	249.92	293.31	323.77	359.48
	36"(914mm)	WURA-1836-L		240.84	246.85	293.00	323.46	361.42	259.99	266.00	312.15	342.61	380.57
	39"(991mm)	WURA-1839-L		255.57	261.82	310.73	341.19	381.40	275.83	282.08	330.99	361.45	401.66
	42"(1067mm)	WURA-1842-L		270.30	276.79	328.46	358.92	401.38	291.67	298.16	349.83	380.29	422.75
	45"(1143mm)	WURA-1845-L		285.03	291.76	346.19	376.65	421.36	307.51	314.24	368.67	399.13	443.84
	48"(1219mm)	WURA-1848-L		333.37	340.34	397.53	427.99	474.95	356.96	363.93	421.12	451.58	498.54
	51"(1295mm)	WURA-1851-L		348.10	355.31	415.26	445.72	494.93	372.80	380.01	439.96	470.42	519.63
	54"(1372mm)	WURA-1854-L		362.83	370.28	432.99	463.45	514.91	388.64	396.09	458.80	489.26	540.72
	57"(1448mm)	WURA-1857-L		377.56	385.25	450.72	481.18	534.89	404.48	412.17	477.64	508.10	561.81
	60"(1524mm)	WURA-1860-L		392.29	400.22	468.45	498.91	554.87	420.32	428.25	496.48	526.94	582.90
	63"(1600mm)	WURA-1863-L		407.02	415.19	486.18	516.64	574.85	436.16	444.33	515.32	545.78	603.99
	66"(1676mm)	WURA-1866-L		421.75	430.16	503.91	534.37	594.83	452.00	460.41	534.16	564.62	625.08
	69"(1753mm)	WURA-1869-L		436.48	445.13	521.64	552.10	614.81	467.84	476.49	553.00	583.46	646.17
	72"(1829mm)	WURA-1872-L		451.21	460.10	539.37	569.83	634.79	483.68	492.57	571.84	602.30	667.26
	75"(1905mm)	WURA-1875-L		465.94	475.07	557.10	587.56	654.77	499.52	508.65	590.68	621.14	688.35
	78"(1981mm)	WURA-1878-L		480.67	490.04	574.83	605.29	674.75	515.36	524.73	609.52	639.98	709.44
	81"(2057mm)	WURA-1881-L		495.40	505.01	592.56	623.02	694.73	531.20	540.81	628.36	658.82	730.53
	84"(2134mm)	WURA-1884-L		510.13	519.98	610.29	640.75	714.71	547.04	556.89	647.20	677.66	751.62
	87"(2210mm)	WURA-1887-L		524.86	534.95	628.02	658.48	734.69	562.88	572.97	666.04	696.50	772.71
	90"(2286mm)	WURA-1890-L		539.59	549.92	645.75	676.21	754.67	578.72	589.05	684.88	715.34	793.80
	93"(2362mm)	WURA-1893-L		554.32	564.89	663.48	693.94	774.65	594.56	605.13	703.72	734.18	814.89
	96"(2438mm)	WURA-1896-L		569.05	579.86	681.21	711.67	794.63	610.40	621.21	722.56	753.02	835.98
	99"(2515mm)	WURA-1899-L		583.78	594.83	698.94	729.40	814.61	626.24	637.29	741.40	771.86	857.07
	102"(2591mm)	WURA-18A2-L		598.51	609.80	716.67	747.13	834.59	642.08	653.37	760.24	790.70	878.16
	105"(2667mm)	WURA-18A5-L		613.24	624.77	734.40	764.86	854.57	657.92	669.45	779.08	809.54	899.25
	108"(2743mm)	WURA-18A8-L		627.97	639.74	752.13	782.59	874.55	673.76	685.53	797.92	828.38	920.34
	111"(2819mm)	WURA-18B1-L		642.70	654.71	769.86	800.32	894.53	689.60	701.61	816.76	847.22	941.43
	114"(2890mm)	WURA-18B4-L		657.43	669.68	787.59	818.05	914.51	705.44	717.69	835.60	866.06	962.52
	117"(2972mm)	WURA-18B7-L		672.16	684.65	805.32	835.78	934.49	721.28	733.77	854.44	884.90	983.61
	120"(3048mm)	WURA-18C0-L		686.89	699.62	823.05	853.51	954.47	737.12	749.85	873.28	903.74	1004.70
24"(610mm)	24"(610mm)	WURA-2424-L		\$205.40	\$213.76	\$252.64	\$283.10	\$ 315.22	\$220.11	\$228.47	\$267.35	\$297.81	\$ 329.93
	27"(686mm)	WURA-2427-L		221.27	229.79	270.51	300.97	334.59	237.09	245.61	286.33	316.79	350.41
	30"(762mm)	WURA-2430-L		237.59	246.35	289.83	320.29	356.16	254.52	263.28	306.76	337.22	373.09
	33"(838mm)	WURA-2433-L		253.91	262.91	309.15	339.61	377.73	271.95	280.95	327.19	357.65	395.77
	36"(914mm)	WURA-2436-L		270.23	279.47	328.47	358.93	399.30	289.38	298.62	347.62	378.08	418.45
	39"(991mm)	WURA-2439-L		286.55	296.03	347.79	378.25	420.87	306.81	316.29	368.05	398.51	441.13
	42"(1067mm)	WURA-2442-L		302.87	312.59	367.11	397.57	442.44	324.24	333.96	388.48	418.94	463.81
	45"(1143mm)	WURA-2445-L		319.19	329.15	386.43	416.89	464.01	341.67	351.63	408.91	439.37	486.49
	48"(1219mm)	WURA-2448-L		369.12	379.32	439.36	469.82	519.19	392.71	402.91	462.95	493.41	542.78
	51"(1295mm)	WURA-2451-L		385.44	395.88	458.68	489.14	540.76	410.14	420.58	483.38	513.84	565.46
	54"(1372mm)	WURA-2454-L		401.76	412.44	478.00	508.46	562.33	427.57	438.25	503.81	534.27	588.14
	57"(1448mm)	WURA-2457-L		418.08	429.00	497.32	527.78	583.90	445.00	455.92	524.24	554.70	610.82
	60"(1524mm)	WURA-2460-L		434.40	445.56	516.64	547.10	605.47	462.43	473.59	544.67	575.13	633.50
	63"(1600mm)	WURA-2463-L		450.72	462.12	535.96	566.42	627.04	479.86	491.26	565.10	595.56	656.18
	66"(1676mm)	WURA-2466-L		467.04	478.68	555.28	585.74	648.61	497.29	508.93	585.53	615.99	678.86
	69"(1753mm)	WURA-2469-L		483.36	495.24	574.60	605.06	670.18	514.72	526.60	605.96	636.42	701.54
	72"(1829mm)	WURA-2472-L		499.68	511.80	593.92	624.38	691.75	532.15	544.27	626.39	656.85	724.22
	75"(1905mm)	WURA-2475-L		516.00	528.36	613.24	643.70	713.32	549.58	561.94	646.82	677.28	746.90
	78"(1981mm)	WURA-2478-L		532.32	544.92	632.56	663.02	734.89	567.01	579.61	667.25	697.71	769.58
	81"(2057mm)	WURA-2481-L		548.64	561.48	651.88	682.34	756.46	584.44	597.28	687.68	718.14	792.26
	84"(2134mm)	WURA-2484-L		564.96	578.04	671.20	701.66	778.03	601.87	614.95	708.11	738.57	814.94
	87"(2210mm)	WURA-2487-L		581.28	594.60	690.52	720.98	799.60	619.30	632.62	728.54	759.00	837.62
	90"(2286mm)	WURA-2490-L		597.60	611.16	709.84	740.30	821.17	636.73	650.29	748.97	779.43	860.30
	93"(2362mm)	WURA-2493-L		613.92	627.72	729.16	759.62	842.74	654.16	667.96	769.40	799.86	882.98
	96"(2438mm)	WURA-2496-L		630.24	644.28	748.48	778.94	864.31	671.59	685.63	789.83	820.29	905.66
	99"(2515mm)	WURA-2499-L		646.56	660.84	767.80	798.26	885.88	689.02	703.30	810.26	840.72	928.34
	102"(2591mm)	WURA-24A2-L		662.88	677.40	787.12	817.58	907.45	706.45	720.97	830.69	861.15	951.02
	105"(2667mm)	WURA-24A5-L		679.20	693.96	806.44	836.90	929.02	723.88	738.64	851.12	881.58	973.70
	108"(2743mm)	WURA-24A8-L		695.52	710.52	825.76	856.22	950.59	741.31	756.31	871.55	902.01	996.38
	111"(2819mm)	WURA-24B1-L		711.84	727.08	845.08	875.54	972.16	758.74	773.98	891.98	922.44	1019.06
	114"(2890mm)	WURA-24B4-L		728.16	743.64	864.40	894.86	993.73	776.17	791.65	912.41	942.87	1041.74
	117"(2972mm)	WURA-24B7-L		744.48	760.20	883.72	914.18	1015.30	793.60	809.32	932.84	963.30	1064.42
	120"(3048mm)	WURA-24C0-L		760.80	776.76	903.04	933.50	1036.87	811.03	826.99	953.27	983.73	1087.10

Adaptable Worksurfaces — Laminate


Rectangular

Depth	Width	Number	①②③	Laminate A					Laminate B				
				T	J	V1	V2	F	T	J	V1	V2	F
30"(762mm)	24"(610mm)	WURA-3024-L	■	\$262.97	\$271.53	\$ 327.49	\$ 357.95	\$ 409.75	\$277.68	\$286.24	\$ 342.20	\$ 372.66	\$ 424.46
	27"(686mm)	WURA-3027-L	■	280.40	289.12	346.92	377.38	430.68	296.22	304.94	362.74	393.20	446.50
	30"(762mm)	WURA-3030-L	■	298.28	307.24	367.80	398.26	453.81	315.21	324.17	384.73	415.19	470.74
	33"(838mm)	WURA-3033-L	■	316.16	325.36	388.68	419.14	476.94	334.20	343.40	406.72	437.18	494.98
	36"(914mm)	WURA-3036-L	■	334.04	343.48	409.56	440.02	500.07	353.19	362.63	428.71	459.17	519.22
	39"(991mm)	WURA-3039-L	■	351.92	361.60	430.44	460.90	523.20	372.18	381.86	450.70	481.16	543.46
	42"(1067mm)	WURA-3042-L	■	369.80	379.72	451.32	481.78	546.33	391.17	401.09	472.69	503.15	567.70
	45"(1143mm)	WURA-3045-L	■	387.68	397.84	472.20	502.66	569.46	410.16	420.32	494.68	525.14	591.94
	48"(1219mm)	WURA-3048-L	■	439.17	449.57	526.69	557.15	626.20	462.76	473.16	550.28	580.74	649.79
	51"(1295mm)	WURA-3051-L	■	457.05	467.69	547.57	578.03	649.33	481.75	492.39	572.27	602.73	674.03
	54"(1372mm)	WURA-3054-L	■	474.93	485.81	568.45	598.91	672.46	500.74	511.62	594.26	624.72	698.27
	57"(1448mm)	WURA-3057-L	■	492.81	503.93	589.33	619.79	695.59	519.73	530.85	616.25	646.71	722.51
	60"(1524mm)	WURA-3060-L	■	510.69	522.05	610.21	640.67	718.72	538.72	550.08	638.24	668.70	746.75
	63"(1600mm)	WURA-3063-L	■	528.57	540.17	631.09	661.55	741.85	557.71	569.31	660.23	690.69	770.99
	66"(1676mm)	WURA-3066-L	■	546.45	558.29	651.97	682.43	764.98	576.70	588.54	682.22	712.68	795.23
	69"(1753mm)	WURA-3069-L	■	564.33	576.41	672.85	703.31	788.11	595.69	607.77	704.21	734.67	819.47
	72"(1829mm)	WURA-3072-L	■	582.21	594.53	693.73	724.19	811.24	614.68	627.00	726.20	756.66	843.71
	75"(1905mm)	WURA-3075-L	■	600.09	612.65	714.61	745.07	834.37	633.67	646.23	748.19	778.65	867.95
	78"(1981mm)	WURA-3078-L	■	617.97	630.77	735.49	765.95	857.50	652.66	665.46	770.18	800.64	892.19
	81"(2057mm)	WURA-3081-L	■	635.85	648.89	756.37	786.83	880.63	671.65	684.69	792.17	822.63	916.43
	84"(2134mm)	WURA-3084-L	■	653.73	667.01	777.25	807.71	903.76	690.64	703.92	814.16	844.62	940.67
	87"(2210mm)	WURA-3087-L	■	671.61	685.13	798.13	828.59	926.89	709.63	723.15	836.15	866.61	964.91
	90"(2286mm)	WURA-3090-L	■	689.49	703.25	819.01	849.47	950.02	728.62	742.38	858.14	888.60	989.15
	93"(2362mm)	WURA-3093-L	■	707.37	721.37	839.89	870.35	973.15	747.61	761.61	880.13	910.59	1013.39
	96"(2438mm)	WURA-3096-L	■	725.25	739.49	860.77	891.23	996.28	766.60	780.84	902.12	932.58	1037.63
	99"(2515mm)	WURA-3099-L	■	743.13	757.61	881.65	912.11	1019.41	785.59	800.07	924.11	954.57	1061.87
	102"(2591mm)	WURA-30A2-L	■	761.01	775.73	902.53	932.99	1042.54	804.58	819.30	946.10	976.56	1086.11
	105"(2667mm)	WURA-30A5-L	■	778.89	793.85	923.41	953.87	1065.67	823.57	838.53	968.09	998.55	1110.35
	108"(2743mm)	WURA-30A8-L	■	796.77	811.97	944.29	974.75	1088.80	842.56	857.76	990.08	1020.54	1134.59
	111"(2819mm)	WURA-30B1-L	■	814.65	830.09	965.17	995.63	1111.93	861.55	876.99	1012.07	1042.53	1158.83
	114"(2890mm)	WURA-30B4-L	■	832.53	848.21	986.05	1016.51	1135.06	880.54	896.22	1034.06	1064.52	1183.07
	117"(2972mm)	WURA-30B7-L	■	850.41	866.33	1006.93	1037.39	1158.19	899.53	915.45	1056.05	1086.51	1207.31
	120"(3048mm)	WURA-30C0-L	■	868.29	884.45	1027.81	1058.27	1181.32	918.52	934.68	1078.04	1108.50	1231.55

Adaptable Worksurfaces — Laminate

Rectangular Key

Depth	Width	Number	①②③	Laminate A					Laminate B				
				T	J	V1	V2	F	T	J	V1	V2	F
30"(762mm)	36"(914mm)	WURY-3036-L	■	\$591.63	\$592.99	\$698.38	\$729.14	\$ 814.70	\$635.12	\$636.48	\$741.87	\$ 772.63	\$ 858.19
	48"(1219mm)	WURY-3048-L	■	625.22	630.34	735.97	766.73	865.21	671.24	676.36	781.99	812.75	911.23
36"(914mm)	48"(1219mm)	WURY-3648-L	■	\$660.48	\$668.95	\$777.89	\$808.65	\$ 916.02	\$709.26	\$717.73	\$826.67	\$ 857.43	\$ 964.80
	60"(1524mm)	WURY-3660-L	■	694.07	706.30	815.48	846.24	966.53	745.38	757.61	866.79	897.55	1017.84
	72"(1829mm)	WURY-3672-L	■	727.66	743.65	853.07	883.83	1017.04	781.50	797.49	906.91	937.67	1070.88
42"(1067mm)	60"(1524mm)	WURY-4260-L	■	\$729.33	\$744.91	\$857.40	\$888.16	\$1017.34	\$783.40	\$798.98	\$911.47	\$ 942.23	\$1071.41
	72"(1829mm)	WURY-4272-L	■	762.92	782.26	894.99	925.75	1067.85	819.52	838.86	951.59	982.35	1124.45
48"(1219mm)	60"(1524mm)	WURY-4860-L	■	\$764.59	\$783.52	\$899.32	\$930.08	\$1068.15	\$821.42	\$840.35	\$956.15	\$ 986.91	\$1124.98
	72"(1829mm)	WURY-4872-L	■	798.18	820.87	936.91	967.67	1118.66	857.54	880.23	996.27	1027.03	1178.02



Features

- Includes worksurface and tie plate.
- Laminate with:
 - Full perimeter T-mold (T), or
 - 3mm edgeband (J) or knife edge (F) on user edge and 1mm edgeband on back, or
 - Cascade (V) on user edge and 1mm edgeband on sides and back.
- Worksurface width dimension attaches directly to panel and matches panel width.**
- Worksurfaces predrilled to accept most support options.
- Optional wireways along back edges are color-matched to solid side/back edge trim. When wood grain laminate is specified, wireways will be Charcoal. Refer to Specification Guide for wireway details.
- 72"(1829mm) wide worksurfaces have two wireways when 'A' option ordered.
- Installed worksurfaces without wireway will not allow clearance for power plug.**
- Depths and widths shown in nominal dimensions.
- Available on RUSH with Standard Core.

Specification Tips

- Worksurface support specific to product line and worksurface edge guidelines; must be separately specified; refer to Specification Guide for support and load.**
 - Flush mount plate
- Knife edge requires use of worksurface supports for that application; worksurface support panel and/or side brackets for use with knife edge.
- Support post or height adjustment disc base is required.**

To Order, Specify:

T-Mold, Edgeband, or Knife

- Product number.
- Laminate surface color.
- Edge trim color for T, J and F.

Cascade

- Product number.
- Laminate surface color.
- Side/back edgeband trim color.
- Front Cascade edge trim color for V1 and V2.

Note: Cascade translucent edge is priced as V2.

① Edge Options:

- T** T-Mold
- J** Edgeband
- V** Cascade
- F** Knife

② Core Options:

- S** Standard ■
- G** Green, add \$109.26 list.


③ Wireway Options:

- A** Notched
- B** Curved
- C** Without

Adaptable Worksurfaces — Laminate

Rectangular Swell

Depth	Swell Depth	Width	Number	①②③	Laminate A					Laminate B				
					T	J	V1	V2	F	T	J	V1	V2	F
18"(457mm)	21"(533mm)	24"(610mm)	WURS-1824-L		\$262.62	\$266.76	\$315.03	\$345.19	\$386.98	\$281.34	\$285.48	\$333.75	\$363.91	\$405.70
		30"(762mm)	WURS-1830-L		289.68	294.32	346.74	376.90	422.84	310.38	315.02	367.44	397.60	443.54
		36"(914mm)	WURS-1836-L		317.16	322.40	379.80	409.96	460.88	339.84	345.08	402.48	432.64	483.56
		42"(1067mm)	WURS-1842-L		344.64	350.48	412.86	443.02	498.92	369.30	375.14	437.52	467.68	523.58
		48"(1219mm)	WURS-1848-L		372.12	378.56	445.92	476.08	536.96	398.76	405.20	472.56	502.72	563.60
		54"(1372mm)	WURS-1854-L		399.60	406.64	478.98	509.14	575.00	428.22	435.26	507.60	537.76	603.62
		60"(1524mm)	WURS-1860-L		427.08	434.72	512.04	542.20	613.04	457.68	465.32	542.64	572.80	643.64
24"(610mm)	27"(686mm)	24"(610mm)	WURS-2424-L		\$271.74	\$276.12	\$325.64	\$355.80	\$400.50	\$290.46	\$294.84	\$344.36	\$374.52	\$419.22
		30"(762mm)	WURS-2430-L		298.80	303.68	357.35	387.51	436.36	319.50	324.38	378.05	408.21	457.06
		36"(914mm)	WURS-2436-L		326.28	331.76	390.41	420.57	474.40	348.96	354.44	413.09	443.25	497.08
		42"(1067mm)	WURS-2442-L		353.76	359.84	423.47	453.63	512.44	378.42	384.50	448.13	478.29	537.10
		48"(1219mm)	WURS-2448-L		381.24	387.92	456.53	486.69	550.48	407.88	414.56	483.17	513.33	577.12
		54"(1372mm)	WURS-2454-L		408.72	416.00	489.59	519.75	588.52	437.34	444.62	518.21	548.37	617.14
		60"(1524mm)	WURS-2460-L		436.20	444.08	522.65	552.81	626.56	466.80	474.68	553.25	583.41	657.16
30"(762mm)	33"(838mm)	24"(610mm)	WURS-3024-L		\$357.24	\$361.40	\$425.26	\$455.42	\$512.82	\$375.96	\$380.12	\$443.98	\$474.14	\$531.54
		30"(762mm)	WURS-3030-L		384.30	388.96	456.97	487.13	548.68	405.00	409.66	477.67	507.83	569.38
		36"(914mm)	WURS-3036-L		411.78	417.04	490.03	520.19	586.72	434.46	439.72	512.71	542.87	609.40
		42"(1067mm)	WURS-3042-L		439.26	445.12	523.09	553.25	624.76	463.92	469.78	547.75	577.91	649.42
		48"(1219mm)	WURS-3048-L		466.74	473.20	556.15	586.31	662.80	493.38	499.84	582.79	612.95	689.44
		54"(1372mm)	WURS-3054-L		494.22	501.28	589.21	619.37	700.84	522.84	529.90	617.83	647.99	729.46
		60"(1524mm)	WURS-3060-L		521.70	529.36	622.27	652.43	738.88	552.30	559.96	652.87	683.03	769.48



WURS

Features

- Includes worksurface and tie plate.
- Laminate with:
 - Full perimeter T-mold (T), or
 - 3mm edgeband (J) or knife edge (F) on user edge and 1mm edgeband on sides and back, or
 - Cascade (V) on user edge and 1mm edgeband on sides and back.
- Worksurfaces predrilled to accept most support options.
- Optional wireway along back edge of worksurface is color-matched to solid side/back edge trim. When wood grain edge trim is specified, wireway will be Charcoal. Refer to Specification Guide for wireway details.
- Installed worksurfaces without wireway will not allow clearance for power plug.**
- Depths and widths shown in nominal dimensions.
- Available on RUSH with Standard Core.

Specification Tips

- Worksurface support specific to product line and worksurface edge guidelines; must be separately specified; refer to Specification Guide for support and load.**
 - Cantilever bracket
 - Side bracket
 - Worksurface support panel
 - Worksurface support column or leg
- Knife edge requires use of worksurface supports for that application; worksurface support panel and/or side brackets for use with knife edge.
- Mini cantilever brackets are for use with 18"(457mm) deep worksurfaces with knife edge only.
- Suggested pedestal style is mobile.

Note: Separately specified worksurface reinforcement channels provide additional support for worksurfaces with 50"(1270mm) spans that are heavily loaded and not otherwise supported by mid-span cantilevers, worksurface support panels, columns or legs.

To Order, Specify:

T-Mold, Edgeband, or Knife

- Product number.
- Laminate surface color.
- Edge trim color for T, J and F.

Cascade

- Product number.
- Laminate surface color.
- Side/back edgeband trim color.
- Front Cascade edge trim color for V1 and V2.

Note: Cascade translucent edge is priced as V2.

① Edge Options:

- T** T-Mold
- J** Edgeband
- V** Cascade
- F** Knife

② Core Options:

- S** Standard
- G** Green, add \$109.26 list.

③ Wireway Options:

- A** Notched
- B** Curved
- C** Without

Adaptable Worksurfaces — Laminate

Rectangular Inverse Swell

Depth	Swell Depth	Width	Number	①②③	Laminate A					Laminate B				
					T	J	V1	V2	F	T	J	V1	V2	F
18"(457mm)	15"(381mm)	24"(610mm)	WURW-1824-L	■	\$262.62	\$266.76	\$315.11	\$345.27	\$386.98	\$281.34	\$285.48	\$333.83	\$363.99	\$405.70
		30"(762mm)	WURW-1830-L	■	289.68	294.32	347.22	377.38	422.84	310.38	315.02	367.92	398.08	443.54
		36"(914mm)	WURW-1836-L	■	317.16	322.40	380.76	410.92	460.88	339.84	345.08	403.44	433.60	483.56
		42"(1067mm)	WURW-1842-L	■	344.64	350.48	414.30	444.46	498.92	369.30	375.14	438.96	469.12	523.58
		48"(1219mm)	WURW-1848-L	■	372.12	378.56	447.84	478.00	536.96	398.76	405.20	474.48	504.64	563.60
		54"(1372mm)	WURW-1854-L	■	399.60	406.64	481.38	511.54	575.00	428.22	435.26	510.00	540.16	603.62
		60"(1524mm)	WURW-1860-L	■	427.08	434.72	514.92	545.08	613.04	457.68	465.32	545.52	575.68	643.64
24"(610mm)	21"(533mm)	24"(610mm)	WURW-2424-L	■	\$271.74	\$276.12	\$324.72	\$354.88	\$400.50	\$290.46	\$294.84	\$343.44	\$373.60	\$419.22
		30"(762mm)	WURW-2430-L	■	298.80	303.68	356.83	386.99	436.36	319.50	324.38	377.53	407.69	457.06
		36"(914mm)	WURW-2436-L	■	326.28	331.76	390.37	420.53	474.40	348.96	354.44	413.05	443.21	497.08
		42"(1067mm)	WURW-2442-L	■	353.76	359.84	423.91	454.07	512.44	378.42	384.50	448.57	478.73	537.10
		48"(1219mm)	WURW-2448-L	■	381.24	387.92	457.45	487.61	550.48	407.88	414.56	484.09	514.25	577.12
		54"(1372mm)	WURW-2454-L	■	408.72	416.00	490.99	521.15	588.52	437.34	444.62	519.61	549.77	617.14
		60"(1524mm)	WURW-2460-L	■	436.20	444.08	524.53	554.69	626.56	466.80	474.68	555.13	585.29	657.16
30"(762mm)	27"(686mm)	24"(610mm)	WURW-3024-L	■	\$357.24	\$361.40	\$425.45	\$455.61	\$512.82	\$375.96	\$380.12	\$444.17	\$474.33	\$531.54
		30"(762mm)	WURW-3030-L	■	384.30	388.96	457.56	487.72	548.68	405.00	409.66	478.26	508.42	569.38
		36"(914mm)	WURW-3036-L	■	411.78	417.04	491.10	521.26	586.72	434.46	439.72	513.78	543.94	609.40
		42"(1067mm)	WURW-3042-L	■	439.26	445.12	524.64	554.80	624.76	463.92	469.78	549.30	579.46	649.42
		48"(1219mm)	WURW-3048-L	■	466.74	473.20	558.18	588.34	662.80	493.38	499.84	584.82	614.98	689.44
		54"(1372mm)	WURW-3054-L	■	494.22	501.28	591.72	621.88	700.84	522.84	529.90	620.34	650.50	729.46
		60"(1524mm)	WURW-3060-L	■	521.70	529.36	625.26	655.42	738.88	552.30	559.96	655.86	686.02	769.48



WURW

Features

- Includes worksurface and tie plate.
- Laminate with:
 - Full perimeter T-mold (T), or
 - 3mm edgeband (J) or knife edge (F) on user edge and 1mm edgeband on sides and back, or
 - Cascade (V) on user edge and 1mm edgeband on sides and back.
- Worksurfaces predrilled to accept most support options.
- Optional wireway along back edge of worksurface is color-matched to solid side/back edge trim. When wood grain edge trim is specified, wireway will be Charcoal. Refer to Specification Guide for wireway details.
- Installed worksurfaces without wireway will not allow clearance for power plug.**
- Depths and widths shown in nominal dimensions.
- Available on RUSH with Standard Core.

Specification Tips

- Worksurface support specific to product line and worksurface edge guidelines; must be separately specified; refer to Specification Guide for support and load.**
 - Cantilever bracket
 - Side brackets
 - Worksurface support panel
 - Worksurface support column or leg
- Knife edge requires use of worksurface supports for that application; worksurface support panel and/or side brackets for use with knife edge.
- Mini cantilever brackets are for use with 18"(457mm) deep worksurfaces with knife edge only.
- Suggested pedestal style is mobile.

Note: Separately specified worksurface reinforcement channels provide additional support for worksurfaces with 50"(1270mm) spans that are heavily loaded and not otherwise supported by mid-span cantilevers, worksurface support panels, columns or legs.

To Order, Specify:

T-Mold, Edgeband, or Knife

- Product number.
- Laminate surface color.
- Edge trim color for T, J and F.

Cascade

- Product number.
- Laminate surface color.
- Side/back edgeband trim color.
- Front Cascade edge trim color for V1 and V2.

Note: Cascade translucent edge is priced as V2.

① Edge Options:

- T** T-Mold
- J** Edgeband
- V** Cascade
- F** Knife

② Core Options:

- S** Standard ■
- G** Green, add \$109.26 list.

③ Wireway Options:

- A** Notched
- B** Curved
- C** Without

Adaptable Worksurfaces — Laminate

Rectangular Transition

Left/Right Depth	Width	Number	①②③	Laminate A					Laminate B				
				T	J	V1	V2	F	T	J	V1	V2	F
18"(457mm)/24"(610mm)	24"(610mm)	WURT-2424-L	N34	\$281.19	\$288.19	\$339.74	\$370.36	\$419.08	\$302.30	\$309.30	\$360.85	\$391.47	\$440.19
	30"(762mm)	WURT-2430-L	N34	317.37	324.91	382.82	413.44	467.26	341.06	348.60	406.51	437.13	490.95
	36"(914mm)	WURT-2436-L	N34	353.55	361.63	425.90	456.52	515.44	379.82	387.90	452.17	482.79	541.71
	42"(1067mm)	WURT-2442-L	N34	389.73	398.35	468.98	499.60	563.62	418.58	427.20	497.83	528.45	592.47
	48"(1219mm)	WURT-2448-L	N34	425.91	435.07	512.06	542.68	611.80	457.34	466.50	543.49	574.11	643.23
	54"(1372mm)	WURT-2454-L	N34	462.09	471.79	555.14	585.76	659.98	496.10	505.80	589.15	619.77	693.99
24"(610mm)/18"(457mm)	60"(1524mm)	WURT-2460-L	N34	498.27	508.51	598.22	628.84	708.16	534.86	545.10	634.81	665.43	744.75
	24"(610mm)	WURT-2424-L	N43	\$281.19	\$288.19	\$339.74	\$370.36	\$419.08	\$302.30	\$309.30	\$360.85	\$391.47	\$440.19
	30"(762mm)	WURT-2430-L	N43	317.37	324.91	382.82	413.44	467.26	341.06	348.60	406.51	437.13	490.95
	36"(914mm)	WURT-2436-L	N43	353.55	361.63	425.90	456.52	515.44	379.82	387.90	452.17	482.79	541.71
	42"(1067mm)	WURT-2442-L	N43	389.73	398.35	468.98	499.60	563.62	418.58	427.20	497.83	528.45	592.47
	48"(1219mm)	WURT-2448-L	N43	425.91	435.07	512.06	542.68	611.80	457.34	466.50	543.49	574.11	643.23
24"(610mm)/30"(762mm)	54"(1372mm)	WURT-2454-L	N43	462.09	471.79	555.14	585.76	659.98	496.10	505.80	589.15	619.77	693.99
	60"(1524mm)	WURT-2460-L	N43	498.27	508.51	598.22	628.84	708.16	534.86	545.10	634.81	665.43	744.75
	24"(610mm)	WURT-3024-L	N45	\$302.30	\$309.30	\$360.85	\$391.47	\$440.19	\$323.41	\$330.41	\$381.96	\$412.58	\$461.30
	30"(762mm)	WURT-3030-L	N45	338.48	346.02	403.93	434.55	488.37	362.17	369.71	427.62	458.24	512.06
	36"(914mm)	WURT-3036-L	N45	374.66	382.74	447.01	477.63	536.55	400.93	409.01	473.28	503.90	562.82
	42"(1067mm)	WURT-3042-L	N45	410.84	419.46	490.09	520.71	584.73	439.69	448.31	518.94	549.56	613.58
30"(762mm)/24"(610mm)	48"(1219mm)	WURT-3048-L	N45	447.02	456.18	533.17	563.79	632.91	478.45	487.61	564.60	595.22	664.34
	54"(1372mm)	WURT-3054-L	N45	483.20	492.90	576.25	606.87	681.09	517.21	526.91	610.26	640.88	715.10
	60"(1524mm)	WURT-3060-L	N45	519.38	529.62	619.33	649.95	729.27	555.97	566.21	655.92	686.54	765.86
	24"(610mm)	WURT-3024-L	N54	\$302.30	\$309.30	\$360.85	\$391.47	\$440.19	\$323.41	\$330.41	\$381.96	\$412.58	\$461.30
	30"(762mm)	WURT-3030-L	N54	338.48	346.02	403.93	434.55	488.37	362.17	369.71	427.62	458.24	512.06
	36"(914mm)	WURT-3036-L	N54	374.66	382.74	447.01	477.63	536.55	400.93	409.01	473.28	503.90	562.82
30"(762mm)/24"(610mm)	42"(1067mm)	WURT-3042-L	N54	410.84	419.46	490.09	520.71	584.73	439.69	448.31	518.94	549.56	613.58
	48"(1219mm)	WURT-3048-L	N54	447.02	456.18	533.17	563.79	632.91	478.45	487.61	564.60	595.22	664.34
	54"(1372mm)	WURT-3054-L	N54	483.20	492.90	576.25	606.87	681.09	517.21	526.91	610.26	640.88	715.10
	60"(1524mm)	WURT-3060-L	N54	519.38	529.62	619.33	649.95	729.27	555.97	566.21	655.92	686.54	765.86



WURT-N34

Features

- Includes worksurface and tie plate.
- Laminate with:
 - Full perimeter T-mold (T), or
 - 3mm edgeband (J) or knife edge (F) on user edge and 1mm edgeband on sides and back, or
 - Cascade (V) on user edge and 1mm edgeband on sides and back.
- Worksurfaces predrilled to accept most support options.
- Optional wireway along back edge of worksurface is color-matched to solid side/back edge trim. When wood grain edge trim is specified, wireway will be Charcoal. Refer to Specification Guide for wireway details.
- Installed worksurfaces without wireway will not allow clearance for power plug.**
- Depths and widths shown in nominal dimensions.
- Available on RUSH with Standard Core.

Specification Tips

- Worksurface support specific to product line and worksurface edge guidelines; must be separately specified; refer to Specification Guide for support and load.**
 - Cantilever bracket
 - Side brackets
 - Worksurface support panel
 - Worksurface support column or leg
 - Attached lower storage
- Knife edge requires use of worksurface supports for that application; worksurface support panel and/or side brackets for use with knife edge.
- Mini cantilever brackets are for use with 18"(457mm) deep worksurfaces with knife edge only.
- For worksurfaces less than 42"(1067mm) wide, suggested pedestal style is mobile.
- For worksurfaces greater than 42"(1067mm) wide, attached pedestal may be installed on deepest side.

Note: Separately specified worksurface reinforcement channels provide additional support for worksurfaces with 50"(1270mm) spans that are heavily loaded and not otherwise supported by mid-span cantilevers, worksurface support panels, columns, legs or attached lower storage.

To Order, Specify:

T-Mold, Edgeband, or Knife

- Product number.
- Laminate surface color.
- Edge trim color for T, J and F.

Cascade

- Product number.
- Laminate surface color.
- Side/back edgeband trim color.
- Front Cascade edge trim color for V1 and V2.

Note: Cascade translucent edge is priced as V2.

① Edge Options:

- T** T-Mold
- J** Edgeband
- V** Cascade
- F** Knife

② Core Options:

- S** Standard
- G** Green, add \$109.26 list.



③ Wireway Options:

- A** Notched
- B** Curved
- C** Without


This page intentionally blank

Adaptable Worksurfaces — Laminate

Wedge



WURE-N34



WURE-N43

Features

- Includes worksurface and tie plate.
- Laminate with:
 - Full perimeter T-mold (T), or
 - 3mm edgeband (J) or knife edge (F) on user edge and 1mm edgeband on sides and back, or
 - Cascade (V) on user edge and 1mm edgeband on sides and back.
- Worksurfaces predrilled to accept most support options.
- Optional wireways along back edges are color-matched to solid side/back edge trim. When wood grain laminate is specified, wireways will be Charcoal. Refer to Specification Guide for wireway details.
- **Installed worksurfaces without wireway will not allow clearance for power plug.**
- Depths and widths shown in nominal dimensions.
- ◆ Available on RUSH with Standard Core.

Specification Tips

- **Worksurface support specific to product line and worksurface edge guidelines; must be separately specified; refer to Specification Guide for support and load.**
 - Cantilever bracket
 - Side brackets
 - Worksurface support panel
 - Worksurface support column or leg
- Knife edge requires use of worksurface supports for that application; worksurface support panel and/or side brackets for use with knife edge.
- Mini cantilever brackets are for use with 18”(457mm) deep worksurfaces with knife edge only.
- **Suggested pedestal style is mobile.**

Note: Separately specified worksurface reinforcement channels provide additional support for worksurfaces with 50”(1270mm) spans that are heavily loaded and not otherwise supported by mid-span cantilevers, worksurface end panels, posts or attached lower storage.

To Order, Specify:

T-Mold, Edgeband, or Knife

- 1) Product number.
- 2) Laminate surface color.
- 3) Edge trim color for T, J and F.

Cascade

- 1) Product number.
- 2) Laminate surface color.
- 3) Side/back edgeband trim color.
- 4) Front Cascade edge trim color for V1 and V2.

Note: Cascade translucent edge is priced as V2.

1 Edge Options:

- T** T-Mold
- J** Edgeband
- V** Cascade
- F** Knife

2 Core Options:

- S** Standard ◆
- G** Green, add \$109.26 list.

3 Wireway Options:

- A** Notched
- B** Curved
- C** Without

Adaptable Worksurfaces — Laminate


Wedge

Left/Right Depth	Width	Number	①②③	Laminate A					Laminate B				
				T	J	V1	V2	F	T	J	V1	V2	F
24"(610mm)/18"(457mm)	24"(610mm)	WURE-2424-L	N43	\$298.20	\$302.51	\$ 353.80	\$ 384.26	\$ 433.81	\$320.26	\$324.57	\$ 375.86	\$ 406.32	\$ 455.87
	30"(762mm)	WURE-2430-L	N43	332.88	337.79	398.20	428.66	482.95	357.46	362.37	422.78	453.24	507.53
	36"(914mm)	WURE-2436-L	N43	367.56	373.07	442.60	473.06	532.09	394.66	400.17	469.70	500.16	559.19
	42"(1067mm)	WURE-2442-L	N43	402.24	408.35	487.00	517.46	581.23	431.86	437.97	516.62	547.08	610.85
	48"(1219mm)	WURE-2448-L	N43	436.92	443.63	531.40	561.86	630.37	469.06	475.77	563.54	594.00	662.51
	54"(1372mm)	WURE-2454-L	N43	471.60	478.91	575.80	606.26	679.51	506.26	513.57	610.46	640.92	714.17
	60"(1524mm)	WURE-2460-L	N43	506.28	514.19	620.20	650.66	728.65	543.46	551.37	657.38	687.84	765.83
	66"(1676mm)	WURE-2466-L	N43	540.96	549.47	664.60	695.06	777.79	580.66	589.17	704.30	734.76	817.49
	72"(1829mm)	WURE-2472-L	N43	575.64	584.75	709.00	739.46	826.93	617.86	626.97	751.22	781.68	869.15
	78"(1981mm)	WURE-2478-L	N43	610.32	620.03	753.40	783.86	876.07	655.06	664.77	798.14	828.60	920.81
	84"(2134mm)	WURE-2484-L	N43	645.00	655.31	797.80	828.26	925.21	692.26	702.57	845.06	875.52	972.47
	90"(2286mm)	WURE-2490-L	N43	679.68	690.59	842.20	872.66	974.35	729.46	740.37	891.98	922.44	1024.13
	96"(2438mm)	WURE-2496-L	N43	714.36	725.87	886.60	917.06	1023.49	766.66	778.17	938.90	969.36	1075.79
	102"(2591mm)	WURE-24A2-L	N43	749.04	761.15	931.00	961.46	1072.63	803.86	815.97	985.82	1016.28	1127.45
	108"(2743mm)	WURE-24A8-L	N43	783.72	796.43	975.40	1005.86	1121.77	841.06	853.77	1032.74	1063.20	1179.11
	114"(2896mm)	WURE-24B4-L	N43	806.84	819.95	1005.00	1035.46	1154.53	865.86	878.97	1064.02	1094.48	1213.55
	120"(3048mm)	WURE-24C0-L	N43	853.08	866.99	1064.20	1094.66	1220.05	915.46	929.37	1126.58	1157.04	1282.43
18"(457mm)/24"(610mm)	24"(610mm)	WURE-2424-L	N34	\$298.20	\$302.51	\$ 353.80	\$ 384.26	\$ 433.81	\$320.26	\$324.57	\$ 375.86	\$ 406.32	\$ 455.87
	30"(762mm)	WURE-2430-L	N34	332.88	337.79	398.20	428.66	482.95	357.46	362.37	422.78	453.24	507.53
	36"(914mm)	WURE-2436-L	N34	367.56	373.07	442.60	473.06	532.09	394.66	400.17	469.70	500.16	559.19
	42"(1067mm)	WURE-2442-L	N34	402.24	408.35	487.00	517.46	581.23	431.86	437.97	516.62	547.08	610.85
	48"(1219mm)	WURE-2448-L	N34	436.92	443.63	531.40	561.86	630.37	469.06	475.77	563.54	594.00	662.51
	54"(1372mm)	WURE-2454-L	N34	471.60	478.91	575.80	606.26	679.51	506.26	513.57	610.46	640.92	714.17
	60"(1524mm)	WURE-2460-L	N34	506.28	514.19	620.20	650.66	728.65	543.46	551.37	657.38	687.84	765.83
	66"(1676mm)	WURE-2466-L	N34	540.96	549.47	664.60	695.06	777.79	580.66	589.17	704.30	734.76	817.49
	72"(1829mm)	WURE-2472-L	N34	575.64	584.75	709.00	739.46	826.93	617.86	626.97	751.22	781.68	869.15
	78"(1981mm)	WURE-2478-L	N34	610.32	620.03	753.40	783.86	876.07	655.06	664.77	798.14	828.60	920.81
	84"(2134mm)	WURE-2484-L	N34	645.00	655.31	797.80	828.26	925.21	692.26	702.57	845.06	875.52	972.47
	90"(2286mm)	WURE-2490-L	N34	679.68	690.59	842.20	872.66	974.35	729.46	740.37	891.98	922.44	1024.13
	96"(2438mm)	WURE-2496-L	N34	714.36	725.87	886.60	917.06	1023.49	766.66	778.17	938.90	969.36	1075.79
	102"(2591mm)	WURE-24A2-L	N34	749.04	761.15	931.00	961.46	1072.63	803.86	815.97	985.82	1016.28	1127.45
	108"(2743mm)	WURE-24A8-L	N34	783.72	796.43	975.40	1005.86	1121.77	841.06	853.77	1032.74	1063.20	1179.11
	114"(2896mm)	WURE-24B4-L	N34	806.84	819.95	1005.00	1035.46	1154.53	865.86	878.97	1064.02	1094.48	1213.55
	120"(3048mm)	WURE-24C0-L	N34	853.08	866.99	1064.20	1094.66	1220.05	915.46	929.37	1126.58	1157.04	1282.43
30"(762mm)/24"(610mm)	24"(610mm)	WURE-3024-L	N54	\$308.70	\$313.01	\$ 364.30	\$ 394.76	\$ 444.31	\$330.76	\$335.07	\$ 386.36	\$ 416.82	\$ 466.37
	30"(762mm)	WURE-3030-L	N54	343.38	348.29	408.70	439.16	493.45	367.96	372.87	433.28	463.74	518.03
	36"(914mm)	WURE-3036-L	N54	378.06	383.57	453.10	483.56	542.59	405.16	410.67	480.20	510.66	569.69
	42"(1067mm)	WURE-3042-L	N54	412.74	418.85	497.50	527.96	591.73	442.36	448.47	527.12	557.58	621.35
	48"(1219mm)	WURE-3048-L	N54	447.42	454.13	541.90	572.36	640.87	479.56	486.27	574.04	604.50	673.01
	54"(1372mm)	WURE-3054-L	N54	482.10	489.41	586.30	616.76	690.01	516.76	524.07	620.96	651.42	724.67
	60"(1524mm)	WURE-3060-L	N54	516.78	524.69	630.70	661.16	739.15	553.96	561.87	667.88	698.34	776.33
	66"(1676mm)	WURE-3066-L	N54	551.46	559.97	675.10	705.56	788.29	591.16	599.67	714.80	745.26	827.99
	72"(1829mm)	WURE-3072-L	N54	586.14	595.25	719.50	749.96	837.43	628.36	637.47	761.72	792.18	879.65
	78"(1981mm)	WURE-3078-L	N54	620.82	630.53	763.90	794.36	886.57	665.56	675.27	808.64	839.10	931.31
	84"(2134mm)	WURE-3084-L	N54	655.50	665.81	808.30	838.76	935.71	702.76	713.07	855.56	886.02	982.97
	90"(2286mm)	WURE-3090-L	N54	690.18	701.09	852.70	883.16	984.85	739.96	750.87	902.48	932.94	1034.63
	96"(2438mm)	WURE-3096-L	N54	724.86	736.37	897.10	927.56	1033.99	777.16	788.67	949.40	979.86	1086.29
	102"(2591mm)	WURE-30A2-L	N54	759.54	771.65	941.50	971.96	1083.13	814.36	826.47	996.32	1026.78	1137.95
	108"(2743mm)	WURE-30A8-L	N54	794.22	806.93	985.90	1016.36	1132.27	851.56	864.27	1043.24	1073.70	1189.61
	114"(2896mm)	WURE-30B4-L	N54	817.34	830.45	1015.50	1045.96	1165.03	876.36	889.47	1074.52	1104.98	1224.05
	120"(3048mm)	WURE-30C0-L	N54	863.58	877.49	1074.70	1105.16	1230.55	925.96	939.87	1137.08	1167.54	1292.93
24"(610mm)/30"(762mm)	24"(610mm)	WURE-3024-L	N45	\$308.70	\$313.01	\$ 364.30	\$ 394.76	\$ 444.31	\$330.76	\$335.07	\$ 386.36	\$ 416.82	\$ 466.37
	30"(762mm)	WURE-3030-L	N45	343.38	348.29	408.70	439.16	493.45	367.96	372.87	433.28	463.74	518.03
	36"(914mm)	WURE-3036-L	N45	378.06	383.57	453.10	483.56	542.59	405.16	410.67	480.20	510.66	569.69
	42"(1067mm)	WURE-3042-L	N45	412.74	418.85	497.50	527.96	591.73	442.36	448.47	527.12	557.58	621.35
	48"(1219mm)	WURE-3048-L	N45	447.42	454.13	541.90	572.36	640.87	479.56	486.27	574.04	604.50	673.01
	54"(1372mm)	WURE-3054-L	N45	482.10	489.41	586.30	616.76	690.01	516.76	524.07	620.96	651.42	724.67
	60"(1524mm)	WURE-3060-L	N45	516.78	524.69	630.70	661.16	739.15	553.96	561.87	667.88	698.34	776.33
	66"(1676mm)	WURE-3066-L	N45	551.46	559.97	675.10	705.56	788.29	591.16	599.67	714.80	745.26	827.99
	72"(1829mm)	WURE-3072-L	N45	586.14	595.25	719.50	749.96	837.43	628.36	637.47	761.72	792.18	879.65
	78"(1981mm)	WURE-3078-L	N45	620.82	630.53	763.90	794.36	886.57	665.56	675.27	808.64	839.10	931.31
	84"(2134mm)	WURE-3084-L	N45	655.50	665.81	808.30	838.76	935.71	702.76	713.07	855.56	886.02	982.97
	90"(2286mm)	WURE-3090-L	N45	690.18	701.09	852.70	883.16	984.85	739.96	750.87	902.48	932.94	1034.63
	96"(2438mm)	WURE-3096-L	N45	724.86	736.37	897.10	927.56	1033.99	777.16	788.67	949.40	979.86	1086.29
	102"(2591mm)	WURE-30A2-L	N45	759.54	771.65	941.50	971.96	1083.13	814.36	826.47	996.32	1026.78	1137.95
	108"(2743mm)	WURE-30A8-L	N45	794.22	806.93	985.90	1016.36	1132.27	851.56	864.27	1043.24	1073.70	1189.61
	114"(2896mm)	WURE-30B4-L	N45	817.34	830.45	1015.50	1045.96	1165.03	876.36	889.47	1074.52	1104.98	1224.05
	120"(3048mm)	WURE-30C0-L	N45	863.58	877.49	1074.70	1105.16	1230.55	925.96	939.87	1137.08	1167.54	1292.93

Adaptable Worksurfaces — Laminate

Sharp Wedge

Left/Right Depth	Width	Number ①②③	Laminate A			Laminate B		
			T	J	F	T	J	F
24"(610mm)/18"(457mm)	24"(610mm)	WURG-2424-L ■ ■ ■ N43	\$311.26	\$314.58	\$447.58	\$334.48	\$337.80	\$470.80
	30"(762mm)	WURG-2430-L ■ ■ ■ N43	350.05	354.06	500.36	373.35	377.36	523.66
	36"(914mm)	WURG-2436-L ■ ■ ■ N43	388.84	393.54	553.14	412.22	416.92	576.52
	42"(1067mm)	WURG-2442-L ■ ■ ■ N43	427.63	433.02	605.92	451.09	456.48	629.38
	48"(1219mm)	WURG-2448-L ■ ■ ■ N43	466.42	472.50	658.70	489.96	496.04	682.24
	54"(1372mm)	WURG-2454-L ■ ■ ■ N43	505.21	511.98	711.48	528.83	535.60	735.10
	60"(1524mm)	WURG-2460-L ■ ■ ■ N43	544.00	551.46	764.26	567.70	575.16	787.96
18"(457mm)/24"(610mm)	24"(610mm)	WURG-2424-L ■ ■ ■ N34	\$311.26	\$314.58	\$447.58	\$334.48	\$337.80	\$470.80
	30"(762mm)	WURG-2430-L ■ ■ ■ N34	350.05	354.06	500.36	373.35	377.36	523.66
	36"(914mm)	WURG-2436-L ■ ■ ■ N34	388.84	393.54	553.14	412.22	416.92	576.52
	42"(1067mm)	WURG-2442-L ■ ■ ■ N34	427.63	433.02	605.92	451.09	456.48	629.38
	48"(1219mm)	WURG-2448-L ■ ■ ■ N34	466.42	472.50	658.70	489.96	496.04	682.24
	54"(1372mm)	WURG-2454-L ■ ■ ■ N34	505.21	511.98	711.48	528.83	535.60	735.10
	60"(1524mm)	WURG-2460-L ■ ■ ■ N34	544.00	551.46	764.26	567.70	575.16	787.96
30"(762mm)/24"(610mm)	24"(610mm)	WURG-3024-L ■ ■ ■ N54	\$315.44	\$320.39	\$458.45	\$338.97	\$343.92	\$481.98
	30"(762mm)	WURG-3030-L ■ ■ ■ N54	354.23	359.87	511.23	377.84	383.48	534.84
	36"(914mm)	WURG-3036-L ■ ■ ■ N54	393.02	399.35	564.01	416.71	423.04	587.70
	42"(1067mm)	WURG-3042-L ■ ■ ■ N54	431.81	438.83	616.79	455.58	462.60	640.56
	48"(1219mm)	WURG-3048-L ■ ■ ■ N54	470.60	478.31	669.57	494.45	502.16	693.42
	54"(1372mm)	WURG-3054-L ■ ■ ■ N54	509.39	517.79	722.35	533.32	541.72	746.28
	60"(1524mm)	WURG-3060-L ■ ■ ■ N54	548.18	557.27	775.13	572.19	581.28	799.14
24"(610mm)/30"(762mm)	24"(610mm)	WURG-3024-L ■ ■ ■ N45	\$315.44	\$320.39	\$458.45	\$338.97	\$343.92	\$481.98
	30"(762mm)	WURG-3030-L ■ ■ ■ N45	354.23	359.87	511.23	377.84	383.48	534.84
	36"(914mm)	WURG-3036-L ■ ■ ■ N45	393.02	399.35	564.01	416.71	423.04	587.70
	42"(1067mm)	WURG-3042-L ■ ■ ■ N45	431.81	438.83	616.79	455.58	462.60	640.56
	48"(1219mm)	WURG-3048-L ■ ■ ■ N45	470.60	478.31	669.57	494.45	502.16	693.42
	54"(1372mm)	WURG-3054-L ■ ■ ■ N45	509.39	517.79	722.35	533.32	541.72	746.28
	60"(1524mm)	WURG-3060-L ■ ■ ■ N45	548.18	557.27	775.13	572.19	581.28	799.14



WURG-N34



WURG-N43

Features

- Includes work surface and tie plate.
- Laminate with:
 - Full perimeter T-mold (T), or
 - 3mm edgeband (J) or knife edge (F) on user edge and 1mm edgeband on sides and back.
- Worksurfaces predrilled to accept most support options.
- Optional wireways along back edges are color-matched to solid side/back edge trim. When wood grain laminate is specified, wireways will be Charcoal. Refer to Specification Guide for wireway details.
- Installed worksurfaces without wireway will not allow clearance for power plug.**
- Depths and widths shown in nominal dimensions.
- Available on RUSH with Standard Core.

Specification Tips

- Worksurface support specific to product line and worksurface edge guidelines; must be separately specified.**
 - Cantilever bracket
 - Side brackets
 - Worksurface support panel not recommended**
 - Worksurface support column or leg
- Knife edge requires use of worksurface supports for that application; worksurface support panel and/or side bracket for use with knife edge.
- Mini cantilever brackets are for use with 18"(457mm) deep worksurfaces with knife edge only.
- Suggested pedestal style is mobile.**
- Due to manufacturing restrictions, not available with Cascade Edge.**

Note: Separately specified worksurface reinforcement channels provide additional support for worksurfaces with 50"(1270mm) spans that are heavily loaded and not otherwise supported by mid-span cantilevers, worksurface end panels, posts or attached lower storage.

To Order, Specify:

- Product number.
- Laminate surface color.
- Edge trim color.

① Edge Options:

- T** T-Mold
- J** Edgeband
- F** Knife

② Core Options:

- S** Standard
- G** Green, add \$109.26 list.

③ Wireway Options:

- A** Notched
- B** Curved
- C** Without

Adaptable Worksurfaces — Laminate

Rectangular Radius End

Depth	Width	Number	①	②	③	④	Laminate A					Laminate B					
							T	J	V1	V2	F	T	J	V1	V2	F	
18″(457mm)	24″(610mm)	WURR-1824-L					■	\$311.78	\$311.48	\$364.50	\$394.66	\$429.62	\$330.50	\$330.20	\$383.22	\$413.38	\$448.34
	30″(762mm)	WURR-1830-L					■	348.30	347.80	405.72	435.88	474.24	369.42	368.92	426.84	457.00	495.36
	36″(914mm)	WURR-1836-L					■	385.38	384.64	448.44	478.60	521.04	408.90	408.16	471.96	502.12	544.56
	42″(1067mm)	WURR-1842-L					■	422.46	421.48	491.16	521.32	567.84	448.38	447.40	517.08	547.24	593.76
	48″(1219mm)	WURR-1848-L					■	459.54	458.32	533.88	564.04	614.64	487.86	486.64	562.20	592.36	642.96
	54″(1372mm)	WURR-1854-L					■	496.62	495.16	576.60	606.76	661.44	527.34	525.88	607.32	637.48	692.16
	60″(1524mm)	WURR-1860-L					■	533.70	532.00	619.32	649.48	708.24	566.82	565.12	652.44	682.60	741.36
24″(610mm)	24″(610mm)	WURR-2424-L					■	\$319.76	\$318.76	\$372.20	\$402.36	\$438.98	\$338.48	\$337.48	\$390.92	\$421.08	\$457.70
	30″(762mm)	WURR-2430-L					■	356.28	355.08	413.42	443.58	483.60	377.40	376.20	434.54	464.70	504.72
	36″(914mm)	WURR-2436-L					■	393.36	391.92	456.14	486.30	530.40	416.88	415.44	479.66	509.82	553.92
	42″(1067mm)	WURR-2442-L					■	430.44	428.76	498.86	529.02	577.20	456.36	454.68	524.78	554.94	603.12
	48″(1219mm)	WURR-2448-L					■	467.52	465.60	541.58	571.74	624.00	495.84	493.92	569.90	600.06	652.32
	54″(1372mm)	WURR-2454-L					■	504.60	502.44	584.30	614.46	670.80	535.32	533.16	615.02	645.18	701.52
	60″(1524mm)	WURR-2460-L					■	541.68	539.28	627.02	657.18	717.60	574.80	572.40	660.14	690.30	750.72
30″(762mm)	24″(610mm)	WURR-3024-L					■	\$414.38	\$416.52	\$488.02	\$518.18	\$575.22	\$433.10	\$435.24	\$506.74	\$536.90	\$593.94
	30″(762mm)	WURR-3030-L					■	450.90	452.84	529.24	559.40	619.84	472.02	473.96	550.36	580.52	640.96
	36″(914mm)	WURR-3036-L					■	487.98	489.68	571.96	602.12	666.64	511.50	513.20	595.48	625.64	690.16
	42″(1067mm)	WURR-3042-L					■	525.06	526.52	614.68	644.84	713.44	550.98	552.44	640.60	670.76	739.36
	48″(1219mm)	WURR-3048-L					■	562.14	563.36	657.40	687.56	760.24	590.46	591.68	685.72	715.88	788.56
	54″(1372mm)	WURR-3054-L					■	599.22	600.20	700.12	730.28	807.04	629.94	630.92	730.84	761.00	837.76
	60″(1524mm)	WURR-3060-L					■	636.30	637.04	742.84	773.00	853.84	669.42	670.16	775.96	806.12	886.96



(Right-hand orientation)



(Left-hand orientation)

WURR

Features

- Includes worksurface and tie plate.
- Laminate with:
 - Full perimeter T-mold (T), or
 - 3mm edgeband (J) or knife edge (F) on user edge and 1mm edgeband on sides and back, or
 - Cascade (V) on user edge and 1mm edgeband on sides and back.
- Worksurfaces predrilled to accept most support options.
- Optional wireway along back edge of worksurface is color-matched to solid side/back edge trim. When wood grain edge trim is specified, wireway will be Charcoal. Refer to Specification Guide for wireway details.
- Installed worksurfaces without wireway will not allow clearance for power plug.**
- Depths and widths shown in nominal dimensions.
- Available on RUSH with Standard Core.

Specification Tips

- Worksurface support specific to product line and worksurface edge guidelines; must be separately specified; refer to Specification Guide for support and load.**
 - Cantilever bracket
 - Side brackets
 - Worksurface support panel
 - Worksurface support column or leg
 - Attached lower storage (for worksurfaces greater than 36" wide)
- Knife edge requires use of worksurface supports for that application; worksurface support panel and/or side brackets for use with knife edge.
- Mini cantilever brackets are for use with 18"(457mm) deep worksurfaces with knife edge only.
- Radius end in all edge options:
 - Side bracket with worksurface support column or leg. Must offer floor support for PREMISE.
- For worksurfaces less than 42"(1067mm) wide, suggested pedestal style is mobile.

Note: Separately specified worksurface reinforcement channels provide additional support for worksurfaces with 50"(1270mm) spans that are heavily loaded and not otherwise supported by mid-span cantilevers, worksurface support panels, posts or attached lower storage.

To Order, Specify:

T-Mold, Edgeband, or Knife

- Product number.
- Laminate surface color.
- Edge trim color for T, J and F.

Cascade

- Product number.
- Laminate surface color.
- Side/back edgeband trim color.
- Front Cascade edge trim color for V1 and V2.

Note: Cascade translucent edge is priced as V2.

① Edge Options:

- T** T-Mold
- J** Edgeband
- V** Cascade
- F** Knife

② Core Options:

- S** Standard
- G** Green, add \$109.26 list.

③ Wireway Options:

- A** Notched
- B** Curved
- C** Without



④ Orientation (as seated):

- R** Right-hand
- L** Left-hand

Adaptable Worksurfaces — Laminate

Rectangular — Split Top

Depth	Width	Number	①②③	Laminate A		V1	V2	Laminate B		V1	V2
				T	J			T	J		
24"(610mm)	36"(914mm)	WURK-2436-L	■	\$1556.44	\$1665.09	\$1954.28	\$1985.20	\$1700.36	\$1809.01	\$2098.20	\$2129.12
	42"(1067mm)	WURK-2442-L	■	1619.40	1731.39	2037.35	2068.27	1767.91	1879.90	2185.86	2216.78
	48"(1219mm)	WURK-2448-L	■	1682.36	1797.69	2120.42	2151.34	1835.46	1950.79	2273.52	2304.44
30"(762mm)	36"(914mm)	WURK-3036-L	■	\$1643.64	\$1752.29	\$2041.48	\$2072.40	\$1794.49	\$1903.14	\$2192.33	\$2223.25
	42"(1067mm)	WURK-3042-L	■	1706.60	1818.59	2124.55	2155.47	1862.04	1974.03	2279.99	2310.91
	48"(1219mm)	WURK-3048-L	■	1769.56	1884.89	2207.62	2238.54	1929.59	2044.92	2367.65	2398.57



WURK

Features

- Includes rear worksurface, front worksurface, mechanism, and tie plate.
- Dual worksurfaces with a 1"(25mm) space between the front and rear worksurfaces. Front worksurface is 12"(305mm) deep.
- Laminate with:
 - 3mm full perimeter T-mold (T), or
 - 3mm edgeband (J) or Cascade (V) edge on front and rear front edge, and 1mm on back and side edge of front worksurface.
- Adjustable front worksurface is attached to the rear worksurface with a spring-assist mechanism.
- Front worksurface manually adjusts to any position 7"(178mm) above and 5 3/4"(146mm) below the rear worksurface.
- Front worksurface tilts -15° to +9°.
- Spring assist mechanism available in charcoal finish color only.
- Optional wireway along back edge of worksurface is color-matched to solid side/back edge trim. When wood grain edge trim is specified, wireway will be Charcoal.
- Installed worksurfaces without wireway will not allow clearance for power plug.**
- Depths and widths shown in nominal dimensions.
- Available on RUSH with Standard Core.

Specification Tips

- Fixed-height rear worksurface is predrilled to accept standard cantilever brackets.
- Worksurface support specific to product line and worksurface edge guidelines; must be separately specified; refer to Specification Guide for support and load.**
 - Cantilever bracket
 - Side brackets
 - Worksurface support panel
 - Worksurface support column or leg

To Order, Specify:

T-Mold or Edgeband

- Product number.
- Laminate surface color.
- Edge trim color for T and J.

Cascade

- Product number.
- Laminate surface color.
- Side/back edgeband trim color.
- Front Cascade edge trim color for V1 and V2.

Note: Cascade translucent edge is priced as V2.

① Edge Options:

- T** T-Mold
- J** Edgeband
- V** Cascade

② Core Options:

- S** Standard ■
- G** Green, add \$109.26 list.



③ Wireway Options:

- A** Notched
- B** Curved
- C** Without

Adaptable Worksurfaces — Laminate

Corner, 90° Straight Front

Left/Right Depth	Width	Number	①②③	Laminate A			Laminate B		
				T	J	F	T	J	F
18"(457mm)	36"(914mm)	WUCA-3636-L	■ ■ ■ N33	\$474.62	\$480.96	\$ 668.42	\$506.76	\$513.10	\$ 700.56
	42"(1067mm)	WUCA-4242-L	■ ■ ■ N33	513.35	519.96	728.20	550.41	557.02	765.26
	48"(1219mm)	WUCA-4848-L	■ ■ ■ N33	612.07	618.95	847.97	654.05	660.93	889.95
	54"(1372mm)	WUCA-5454-L	■ ■ ■ N33	646.51	653.66	903.46	693.41	700.56	950.36
24"(610mm)	36"(914mm)	WUCA-3636-L	■ ■ ■ N44	\$493.90	\$500.24	\$ 687.70	\$526.04	\$532.38	\$ 719.84
	42"(1067mm)	WUCA-4242-L	■ ■ ■ N44	532.63	539.24	747.48	569.69	576.30	784.54
	48"(1219mm)	WUCA-4848-L	■ ■ ■ N44	631.35	638.23	867.25	673.33	680.21	909.23
	54"(1372mm)	WUCA-5454-L	■ ■ ■ N44	665.79	672.94	922.74	712.69	719.84	969.64
30"(762mm)	36"(914mm)	WUCA-3636-L	■ ■ ■ N55	\$575.31	\$581.65	\$ 769.11	\$607.45	\$613.79	\$ 801.25
	42"(1067mm)	WUCA-4242-L	■ ■ ■ N55	614.04	620.65	828.89	651.10	657.71	865.95
	48"(1219mm)	WUCA-4848-L	■ ■ ■ N55	712.76	719.64	948.66	754.74	761.62	990.64
	54"(1372mm)	WUCA-5454-L	■ ■ ■ N55	747.20	754.35	1004.15	794.10	801.25	1051.05



WUCA

Features

- Includes worksurface and tie plate.
- Laminate with:
 - Full perimeter T-mold (T), or
 - 3mm edgeband (J) or knife edge (F) on user edge and 1mm edgeband on sides and back.
- Worksurfaces predrilled to accept most support options.
- Optional wireway along back edges of worksurface is color-matched to solid side/back edge trim. When wood grain edge trim is specified, wireway will be Charcoal.
- Installed worksurfaces without wireway will not allow clearance for power plug.**
- Depths and widths shown in nominal dimensions.
- Available on RUSH with Standard Core.

Specification Tips

- Corner bracket is required and must be separately specified.**
- Worksurface support specific to product line and worksurface edge guidelines; must be separately specified; refer to Specification Guide for support and load.**
 - Corner bracket - REQUIRED
 - Cantilever bracket
 - Worksurface support panel
- Knife edge requires use of worksurface supports for that application; worksurface support panel and/or side brackets for use with knife edge.
- Mini cantilever brackets are for use with 18"(457mm) deep worksurfaces with knife edge only.
- Recommend the KU4A-0023-■ N or KU3A-0023-■ keyboard pad for 36"(914mm)-wide corners.
- Due to manufacturing restrictions, not available with Cascade edge.**

To Order, Specify:

- Product number.
- Laminate surface color.
- Edge trim color.

① Edge Options:

- T** T-Mold
J Edgeband
F Knife

② Core Options:

- S** Standard ■
G Green, add \$109.26 list.

③ Wireway Options:



- A** Notched
B Curved
C Without

Adaptable Worksurfaces — Laminate

Corner, 90° Wrap-Around

Left/Right Depth	Width	Number	①②③	Laminate A					Laminate B				
				T	J	V1	V2	F	T	J	V1	V2	F
18"(457mm)	36"(914mm)	WUCR-3636-L	■ ■ ■ N33	\$409.84	\$420.30	\$482.40	\$513.46	\$ 595.77	\$439.70	\$450.16	\$512.26	\$543.32	\$ 625.63
	42"(1067mm)	WUCR-4242-L	■ ■ ■ N33	480.76	499.92	570.72	601.78	687.75	515.84	535.00	605.80	636.86	722.83
	48"(1219mm)	WUCR-4848-L	■ ■ ■ N33	551.68	579.54	659.04	690.10	779.73	591.98	619.84	699.34	730.40	820.03
	54"(1372mm)	WUCR-5454-L	■ ■ ■ N33	622.60	659.16	747.36	778.42	871.71	668.12	704.68	792.88	823.94	917.23
24"(610mm)	36"(914mm)	WUCR-3636-L	■ ■ ■ N44	\$475.96	\$481.12	\$552.38	\$583.44	\$ 661.45	\$510.68	\$515.84	\$587.10	\$618.16	\$ 696.17
	42"(1067mm)	WUCR-4242-L	■ ■ ■ N44	546.88	560.74	640.70	671.76	753.43	586.82	600.68	680.64	711.70	793.37
	48"(1219mm)	WUCR-4848-L	■ ■ ■ N44	617.80	640.36	729.02	760.08	845.41	662.96	685.52	774.18	805.24	890.57
	54"(1372mm)	WUCR-5454-L	■ ■ ■ N44	688.72	719.98	817.34	848.40	937.39	739.10	770.36	867.72	898.78	987.77
30"(762mm)	36"(914mm)	(1) WUCR-3636-L	■ ■ ■ N55	\$542.08	\$541.94	N/A	N/A	\$ 727.13	\$581.66	\$581.52	N/A	N/A	\$ 766.71
	42"(1067mm)	WUCR-4242-L	■ ■ ■ N55	613.00	621.56	710.68	741.74	819.11	657.80	666.36	755.48	786.54	863.91
	48"(1219mm)	WUCR-4848-L	■ ■ ■ N55	683.92	701.18	799.00	830.06	911.09	733.94	751.20	849.02	880.08	961.11
	54"(1372mm)	WUCR-5454-L	■ ■ ■ N55	754.84	780.80	887.32	918.38	1003.07	810.08	836.04	942.56	973.62	1058.31

(1) Cascade edge option not available in this size.



WUCR

Features

- Includes worksurface.
- Laminate with:
 - Full perimeter T-mold (T), or
 - 3mm edgeband (J) or knife edge (F) on user edge and 1mm edgeband on sides and back, or
 - Cascade (V) on user edge and 1mm edgeband on sides and back.
- Worksurfaces predrilled to accept most support options.
- Optional wireway along back edges of worksurface is color-matched to solid side/back edge trim. When wood grain edge trim is specified, wireway will be Charcoal. Refer to Specification Guide for wireway details.
- Installed worksurfaces without wireway will not allow clearance for power plug.**
- Depths and widths shown in nominal dimensions.
- Available on RUSH with Standard Core.

Specification Tips

- Corner bracket is required and must be separately specified.**
- Worksurface support specific to product line and worksurface edge guidelines; must be separately specified; refer to Specification Guide for support and load.**
 - Corner bracket - REQUIRED
 - Cantilever bracket
 - Worksurface support panel
- Knife edge requires use of worksurface supports for that application; worksurface support panel and/or side brackets for use with knife edge.
- Mini cantilever brackets are for use with 18"(457mm) deep worksurfaces with knife edge only.
- Recommend the KU4A-0023- ■ ■ N or KU3A-0023- ■ ■ keyboard pad for 36"(914mm)-wide corners.

To Order, Specify:

T-Mold, Edgeband, or Knife

- Product number.
- Laminate surface color.
- Edge trim color for T, J and F.

Cascade

- Product number.
- Laminate surface color.
- Side/back edgeband trim color.
- Front Cascade edge trim color for V1 and V2.

Note: Cascade translucent edge is priced as V2.

① Edge Options:

- T** T-Mold
- J** Edgeband
- V** Cascade
- F** Knife

② Core Options:

- S** Standard ■
- G** Green, add \$109.26 list.

③ Wireway Options:


- A** Notched
- B** Curved
- C** Without

Adaptable Worksurfaces — Laminate

Corner, 90° Notched

Left/Right Depth	Width	Number	①②③	Laminate A					Laminate B				
				T	J	V1	V2	F	T	J	V1	V2	F
18"(457mm)	36"(914mm)	WUCN-3636-L	■ ■ ■ N33	\$449.19	\$456.92	\$533.15	\$563.61	\$ 641.00	\$480.70	\$488.43	\$564.66	\$595.12	\$ 672.51
	42"(1067mm)	WUCN-4242-L	■ ■ ■ N33	524.29	531.47	617.45	647.91	737.85	562.10	569.28	655.26	685.72	775.66
	48"(1219mm)	WUCN-4848-L	■ ■ ■ N33	600.55	607.07	704.75	735.21	840.21	644.66	651.18	748.86	779.32	884.32
	54"(1372mm)	WUCN-5454-L	■ ■ ■ N33	702.02	707.88	817.26	847.72	967.78	752.43	758.29	867.67	898.13	1018.19
24"(610mm)	36"(914mm)	WUCN-3636-L	■ ■ ■ N44	\$466.00	\$473.73	\$549.96	\$580.42	\$ 657.81	\$497.51	\$505.24	\$581.47	\$611.93	\$ 689.32
	42"(1067mm)	WUCN-4242-L	■ ■ ■ N44	541.10	548.28	634.26	664.72	754.66	578.91	586.09	672.07	702.53	792.47
	48"(1219mm)	WUCN-4848-L	■ ■ ■ N44	617.36	623.88	721.56	752.02	857.02	661.47	667.99	765.67	796.13	901.13
	54"(1372mm)	WUCN-5454-L	■ ■ ■ N44	718.83	724.69	834.07	864.53	984.59	769.24	775.10	884.48	914.94	1035.00
30"(762mm)	36"(914mm)	(1) WUCN-3636-L	■ ■ ■ N55	\$482.80	\$490.53	N/A	N/A	\$ 674.61	\$514.31	\$522.04	N/A	N/A	\$ 706.12
	42"(1067mm)	WUCN-4242-L	■ ■ ■ N55	557.90	565.08	\$651.06	\$681.52	771.46	595.71	602.89	\$688.87	\$719.33	809.27
	48"(1219mm)	WUCN-4848-L	■ ■ ■ N55	634.16	640.68	738.36	768.82	873.82	678.27	684.79	782.47	812.93	917.93
	54"(1372mm)	WUCN-5454-L	■ ■ ■ N55	735.63	741.49	850.87	881.33	1001.39	786.04	791.90	901.28	931.74	1051.80

(1) Cascade edge option not available in this size.



WUCN

Features

- Includes worksurface.
- Laminate with:
 - Full perimeter T-mold (T), or
 - 3mm edgeband (J) or knife edge (F) on user edge and 1mm edgeband on sides and back, or
 - Cascade (V) on user edge and 1mm edgeband on sides and back.
- Worksurfaces predrilled to accept an adjustable keyboard and most support options.
- Optional wireways along back edges are color-matched to solid side/back edge trim. When wood grain laminate is specified, wireways will be Charcoal. Refer to Specification Guide for wireway details.
- **Installed worksurfaces without wireway will not allow clearance for power plug.**
- Depths and widths shown in nominal dimensions.
- Available on RUSH with Standard Core.

Specification Tips

- **Corner bracket is required and must be separately specified.**
- **Worksurface support specific to product line and worksurface edge guidelines; must be separately specified; refer to Specification Guide for support and load.**
 - Corner bracket - REQUIRED
 - Cantilever bracket
 - Worksurface support panel
 - Side brackets
- Knife edge requires use of worksurface supports for that application; worksurface support panel and/or side brackets for use with knife edge.
- Mini cantilever brackets are for use with 18"(457mm) deep worksurfaces with knife edge only.
- Recommend the KU4A-0023- ■ N or KU3A-0023- ■ ■ keyboard pad for 36"(914mm)-wide corners.

To Order, Specify:

T-Mold, Edgeband, or Knife

- 1) Product number.
- 2) Laminate surface color.
- 3) Edge trim color for T, J and F.

Cascade

- 1) Product number.
- 2) Laminate surface color.
- 3) Side/back edgeband trim color.
- 4) Front Cascade edge trim color for V1 and V2.

Note: Cascade translucent edge is priced as V2.

① Edge Options:

- T** T-Mold
- J** Edgeband
- V** Cascade
- F** Knife

② Core Options:

- S** Standard ■
- G** Green, add \$109.26 list.



③ Wireway Options:

- A** Notched
- B** Curved
- C** Without


Adaptable Worksurfaces — Laminate

Corner, 90° Angled

Left/Right Depth	Width	Number	①②③④	Laminate A			Laminate B		
				T	J	F	T	J	F
18"(457mm)	36"(914mm)	WUCU-3636-L	33	\$456.73	\$462.51	\$ 607.84	\$486.43	\$492.21	\$ 637.54
	42"(1067mm)	WUCU-4242-L	33	500.08	505.08	687.43	536.77	541.77	724.12
	48"(1219mm)	WUCU-4848-L	33	596.47	600.69	820.06	640.15	644.37	863.74
	54"(1372mm)	WUCU-5454-L	33	692.86	696.30	952.69	743.53	746.97	1003.36
24"(610mm)	36"(914mm)	WUCU-3636-L	44	\$481.23	\$484.79	\$ 636.98	\$512.71	\$516.27	\$ 668.46
	42"(1067mm)	WUCU-4242-L	44	524.58	527.36	716.57	563.05	565.83	755.04
	48"(1219mm)	WUCU-4848-L	44	620.97	622.97	849.20	666.43	668.43	894.66
	54"(1372mm)	WUCU-5454-L	44	717.36	718.58	981.83	769.81	771.03	1034.28
30"(762mm)	36"(914mm)	WUCU-3636-L	55	\$505.73	\$507.07	\$ 666.12	\$538.99	\$540.33	\$ 699.38
	42"(1067mm)	WUCU-4242-L	55	549.08	549.64	745.71	589.33	589.89	785.96
	48"(1219mm)	WUCU-4848-L	55	645.47	645.25	878.34	692.71	692.49	925.58
	54"(1372mm)	WUCU-5454-L	55	741.86	740.86	1010.97	796.09	795.09	1065.20



(Left-hand orientation)



(Right-hand orientation)
WUCU

Features

- Includes worksurface.
- Laminate with:
 - Full perimeter T-mold (T), or
 - 3mm edgeband (J) or knife edge (F) on user edge and 1mm edgeband on back.
- Optional wireways along back edges are color-matched to solid side/back edge trim. When wood grain laminate is specified, wireways will be Charcoal. Refer to Specification Guide for wireway details.
- Installed worksurfaces without wireway will not allow clearance for power plug.**
- Depths and widths shown in nominal dimensions.
- Available on RUSH with Standard Core.

Specification Tips

- Corner bracket is required and must be separately specified.**
- Worksurface support specific to product line and worksurface edge guidelines; must be separately specified; refer to Specification Guide for support and load.**
 - Rear corner bracket - REQUIRED
 - Cantilever bracket
 - Worksurface support panel
- Knife edge requires use of worksurface supports for that application; worksurface support panel and/or side brackets for use with knife edge.
- Mini cantilever brackets are for use with 18"(457mm) deep worksurfaces with knife edge only.
- Recommend the KU4A-0023-■ N or KU3A-0023-■ keyboard pad for 36"(914mm)-wide corners.
- Due to manufacturing restrictions, not available with Cascade edge.**

To Order, Specify:

- Product number.
- Laminate surface color.
- Edge trim color.

① Edge Options:

- T** T-Mold
- J** Edgeband
- F** Knife

② Core Options:

- S** Standard
- G** Green, add \$109.26 list.

③ Wireway Options:

- A** Notched
- B** Curved
- C** Without

④ Orientation (as seated):


- R** Right-hand
- L** Left-hand

Adaptable Worksurfaces — Laminate


Corner, 90° Wrap-Around Transitional

Left/Right Depth	Width	Number	①②③	Laminate A					Laminate B				
				T	J	V1	V2	F	T	J	V1	V2	F
18"(457mm)/24"(610mm)	36"(914mm)	WUCT-3636-L	■ ■ ■ ■ N34	\$442.90	\$450.71	\$517.39	\$548.45	\$628.61	\$475.19	\$483.00	\$549.68	\$580.74	\$ 660.90
	42"(1067mm)	WUCT-4242-L	■ ■ ■ ■ N34	513.82	530.33	605.71	636.77	720.59	551.33	567.84	643.22	674.28	758.10
	48"(1219mm)	WUCT-4848-L	■ ■ ■ ■ N34	584.74	609.95	694.03	725.09	812.57	627.47	652.68	736.76	767.82	855.30
	54"(1372mm)	WUCT-5454-L	■ ■ ■ ■ N34	655.66	689.57	782.35	813.41	904.55	703.61	737.52	830.30	861.36	952.50
24"(610mm)/18"(457mm)	36"(914mm)	WUCT-3636-L	■ ■ ■ ■ N43	\$442.90	\$450.71	\$517.39	\$548.45	\$628.61	\$475.19	\$483.00	\$549.68	\$580.74	\$ 660.90
	42"(1067mm)	WUCT-4242-L	■ ■ ■ ■ N43	513.82	530.33	605.71	636.77	720.59	551.33	567.84	643.22	674.28	758.10
	48"(1219mm)	WUCT-4848-L	■ ■ ■ ■ N43	584.74	609.95	694.03	725.09	812.57	627.47	652.68	736.76	767.82	855.30
	54"(1372mm)	WUCT-5454-L	■ ■ ■ ■ N43	655.66	689.57	782.35	813.41	904.55	703.61	737.52	830.30	861.36	952.50
24"(610mm)/30"(762mm)	36"(914mm) ⁽¹⁾	WUCT-3636-L	■ ■ ■ ■ N45	\$509.02	\$511.53	N/A	N/A	\$694.29	\$546.17	\$548.68	N/A	N/A	\$ 731.44
	42"(1067mm)	WUCT-4242-L	■ ■ ■ ■ N45	579.94	591.15	675.69	706.75	786.27	622.31	633.52	718.06	749.12	828.64
	48"(1219mm)	WUCT-4848-L	■ ■ ■ ■ N45	650.86	670.77	764.01	795.07	878.25	698.45	718.36	811.60	842.66	925.84
	54"(1372mm)	WUCT-5454-L	■ ■ ■ ■ N45	721.78	750.39	852.33	883.39	970.23	774.59	803.20	905.14	936.20	1023.04
30"(762mm)/24"(610mm)	36"(914mm) ⁽¹⁾	WUCT-3636-L	■ ■ ■ ■ N54	\$509.02	\$511.53	N/A	N/A	\$694.29	\$546.17	\$548.68	N/A	N/A	\$ 731.44
	42"(1067mm)	WUCT-4242-L	■ ■ ■ ■ N54	579.94	591.15	675.69	706.75	786.27	622.31	633.52	718.06	749.12	828.64
	48"(1219mm)	WUCT-4848-L	■ ■ ■ ■ N54	650.86	670.77	764.01	795.07	878.25	698.45	718.36	811.60	842.66	925.84
	54"(1372mm)	WUCT-5454-L	■ ■ ■ ■ N54	721.78	750.39	852.33	883.39	970.23	774.59	803.20	905.14	936.20	1023.04

⁽¹⁾Cascade & knife edge not available in these sizes.



WUCT-N34



WUCT-N43

Features

- Includes worksurface.
- Laminate with:
 - Full perimeter T-mold (T), or
 - 3mm edgeband (J) or knife edge (F) on user edge and 1mm edgeband on sides and back, or
 - Cascade (V) user edge and 1mm edgeband on sides and back.
- Worksurfaces predrilled to accept most support options.
- Optional wireway along back edges of worksurface is color-matched to solid side/back edge trim. When wood grain edge trim is specified, wireway will be Charcoal. Refer to Specification Guide for wireway details.
- Installed worksurfaces without wireway will not allow clearance for power plug.**
- Depths and widths shown in nominal dimensions.
- Available on RUSH with Standard Core.

Specification Tips

- Corner bracket is required and must be separately specified.**
- Worksurface support specific to product line and worksurface edge guidelines; must be separately specified; refer to Specification Guide for support and load.**
 - Corner bracket - REQUIRED
 - Cantilever bracket
 - Worksurface support panel
- Knife edge requires use of worksurface supports for that application; worksurface support panel and/or side brackets for use with knife edge.
- Mini cantilever brackets are for use with 18"(457mm) deep worksurfaces with knife edge only.
- Recommend the KU4A-0023- ■ N or KU3A-0023- ■ ■ keyboard pad for 36"(914mm)-wide corners.

To Order, Specify:

T-Mold, Edgeband, or Knife

- Product number.
- Laminate surface color.
- Edge trim color for T, J and F.

Cascade

- Product number.
- Laminate surface color.
- Side/back edgeband trim color.
- Front Cascade edge trim color for V1 and V2.

Note: Cascade translucent edge is priced as V2.

① Edge Options:

- T** T-Mold
- J** Edgeband
- V** Cascade
- F** Knife

② Core Options:

















- S** Standard ■
- G** Green, add \$109.26 list.

③ Wireway Options:


- A** Notched
- B** Curved
- C** Without

Adaptable Worksurfaces — Laminate


Corner, 90° Notched Transitional

Left/Right Depth	Width	Number ①②③	Laminate A					Laminate B				
			T	J	V1	V2	F	T	J	V1	V2	F
18"(457mm)/24"(610mm)	36"(914mm)	WUCH-3636-L  N34	\$438.69	\$446.42	\$522.65	\$553.11	\$630.50	\$470.20	\$477.93	\$554.16	\$584.62	\$ 662.01
	42"(1067mm)	WUCH-4242-L  N34	513.79	520.97	606.95	637.41	727.35	551.60	558.78	644.76	675.22	765.16
	48"(1219mm)	WUCH-4848-L  N34	590.05	596.57	694.25	724.71	829.71	634.16	640.68	738.36	768.82	873.82
	54"(1372mm)	WUCH-5454-L  N34	691.52	697.38	806.76	837.22	957.28	741.93	747.79	857.17	887.63	1007.69
24"(610mm)/18"(457mm)	36"(914mm)	WUCH-3636-L  N43	\$438.69	\$446.42	\$522.65	\$553.11	\$630.50	\$470.20	\$477.93	\$554.16	\$584.62	\$ 662.01
	42"(1067mm)	WUCH-4242-L  N43	513.79	520.97	606.95	637.41	727.35	551.60	558.78	644.76	675.22	765.16
	48"(1219mm)	WUCH-4848-L  N43	590.05	596.57	694.25	724.71	829.71	634.16	640.68	738.36	768.82	873.82
	54"(1372mm)	WUCH-5454-L  N43	691.52	697.38	806.76	837.22	957.28	741.93	747.79	857.17	887.63	1007.69
24"(610mm)/30"(762mm)	36"(914mm) ⁽¹⁾	WUCH-3636-L  N45	\$472.30	\$480.03	N/A	N/A	\$664.11	\$503.81	\$511.54	N/A	N/A	\$ 695.62
	42"(1067mm)	WUCH-4242-L  N45	547.40	554.58	640.56	671.02	760.96	585.21	592.39	678.37	708.83	798.77
	48"(1219mm)	WUCH-4848-L  N45	623.66	630.18	727.86	758.32	863.32	667.77	674.29	771.97	802.43	907.43
	54"(1372mm)	WUCH-5454-L  N45	725.13	730.99	840.37	870.83	990.89	775.54	781.40	890.78	921.24	1041.30
30"(762mm)/24"(610mm)	36"(914mm) ⁽¹⁾	WUCH-3636-L  N54	\$472.30	\$480.03	N/A	N/A	\$664.11	\$503.81	\$511.54	N/A	N/A	\$ 695.62
	42"(1067mm)	WUCH-4242-L  N54	547.40	554.58	640.56	671.02	760.96	585.21	592.39	678.37	708.83	798.77
	48"(1219mm)	WUCH-4848-L  N54	623.66	630.18	727.86	758.32	863.32	667.77	674.29	771.97	802.43	907.43
	54"(1372mm)	WUCH-5454-L  N54	725.13	730.99	840.37	870.83	990.89	775.54	781.40	890.78	921.24	1041.30

⁽¹⁾Cascade & knife edge not available in these sizes.




WUCH-N34





WUCH-N43

Features

- Includes worksurface.
- Laminate with:
 - Full perimeter T-mold (T), or
 - 3mm edgeband (J) or knife edge (F) on user edge and 1mm edgeband on back, or
 - Cascade (V) user edge and 1mm edgeband on sides and back.
- Worksurfaces predrilled to accept an adjustable keyboard and most support options.
- Optional wireways along back edges are color-matched to solid side/back edge trim. When wood grain laminate is specified, wireways will be Charcoal. Refer to Specification Guide for wireway details.
- Installed worksurfaces without wireway will not allow clearance for power plug.**
- Depths and widths shown in nominal dimensions.
-  Available on RUSH with Standard Core.

Specification Tips

- Corner bracket is required and must be separately specified.**
- Worksurface support specific to product line and worksurface edge guidelines; must be separately specified; refer to Specification Guide for support and load.**
 - Corner bracket - REQUIRED
 - Cantilever bracket
 - Worksurface support panel
- Knife edge requires use of worksurface supports for that application; worksurface support panel and/or side brackets for use with knife edge.
- Mini cantilever brackets are for use with 18"(457mm) deep worksurfaces with knife edge only.
- Recommend the KU4A-0023-  N or KU3A-0023-  B keyboard pad for 36"(914mm)-wide corners.

To Order, Specify:

T-Mold, Edgeband, or Knife



- Product number.
- Laminate surface color.
- Edge trim color for T, J and F.

Cascade




- Product number.
- Laminate surface color.
- Side/back edgeband trim color.
- Front Cascade edge trim color for V1 and V2.

Note: Cascade translucent edge is priced as V2.




① Edge Options:

-  T-Mold
-  Edgeband
-  Cascade
-  Knife

② Core Options:

-  Standard 
-  Green, add \$109.26 list.


③ Wireway Options:

-  Notched
-  Curved
-  Without

Adaptable Worksurfaces — Laminate


Corner, 90° Angled Transitional

Left/Right Depth	Width	Number	①②③④	Laminate A			Laminate B		
				T	J	F	T	J	F
18"(457mm)/24"(610mm)	36"(914mm)	WUCF-3636-L	34	\$415.94	\$420.61	\$569.37	\$446.53	\$451.20	\$ 599.96
	42"(1067mm)	WUCF-4242-L	34	512.33	516.22	702.00	549.91	553.80	739.58
	48"(1219mm)	WUCF-4848-L	34	608.72	611.83	834.63	653.29	656.40	879.20
	54"(1372mm)	WUCF-5454-L	34	705.11	707.44	967.26	756.67	759.00	1018.82
24"(610mm)/18"(457mm)	36"(914mm)	WUCF-3636-L	43	\$415.94	\$420.61	\$569.37	\$446.53	\$451.20	\$ 599.96
	42"(1067mm)	WUCF-4242-L	43	512.33	516.22	702.00	549.91	553.80	739.58
	48"(1219mm)	WUCF-4848-L	43	608.72	611.83	834.63	653.29	656.40	879.20
	54"(1372mm)	WUCF-5454-L	43	705.11	707.44	967.26	756.67	759.00	1018.82
24"(610mm)/30"(762mm)	36"(914mm)	WUCF-3636-L	45	\$440.44	\$442.89	\$598.51	\$472.81	\$475.26	\$ 630.88
	42"(1067mm)	WUCF-4242-L	45	536.83	538.50	731.14	576.19	577.86	770.50
	48"(1219mm)	WUCF-4848-L	45	633.22	634.11	863.77	679.57	680.46	910.12
	54"(1372mm)	WUCF-5454-L	45	729.61	729.72	996.40	782.95	783.06	1049.74
30"(762mm)/24"(610mm)	36"(914mm)	WUCF-3636-L	54	\$440.44	\$442.89	\$598.51	\$472.81	\$475.26	\$ 630.88
	42"(1067mm)	WUCF-4242-L	54	536.83	538.50	731.14	576.19	577.86	770.50
	48"(1219mm)	WUCF-4848-L	54	633.22	634.11	863.77	679.57	680.46	910.12
	54"(1372mm)	WUCF-5454-L	54	729.61	729.72	996.40	782.95	783.06	1049.74



(Left-hand orientation)

WUCF-N34



(Right-hand orientation)

WUCF-N43

Features

- Includes worksurface.
- Laminate with:
 - Full perimeter T-mold (T), or
 - 3mm edgeband (J) or knife edge (F) on user edge and 1mm edgeband on sides and back.
- Optional wireways along back edges are color-matched to solid side/back edge trim. When wood grain laminate is specified, wireways will be Charcoal. Refer to Specification Guide for wireway details.
- Installed worksurfaces without wireway will not allow clearance for power plug.**
- Depths and widths shown in nominal dimensions.
- Available on RUSH with Standard Core.

Specification Tips

- Corner bracket is required and must be separately specified.**
- Worksurface support specific to product line and worksurface edge guidelines; must be separately specified; refer to Specification Guide for support and load.**
 - Corner bracket - REQUIRED
 - Cantilever bracket
 - Worksurface support panel
- Knife edge requires use of worksurface supports for that application; worksurface support panel and/or side brackets for use with knife edge.
- Mini cantilever brackets are for use with 18"(457mm) deep worksurfaces with knife edge only.
- Recommend the KU4A-0023- N or KU3A-0023- keyboard pad for 36"(914mm)-wide corners.
- Due to manufacturing restrictions, not available with Cascade edge.**

To Order, Specify:

- Product number.
- Laminate surface color.
- Edge trim color.

① Edge Options:

- T T-Mold
J Edgeband
F Knife

② Core Options:

- S Standard
G Green, add \$109.26 list.

③ Wireway Options:

- A Notched
B Curved
C Without


④ Orientation (as seated):

- R Right-hand
L Left-hand

Adaptable Worksurfaces — Laminate

Corner, 90° Split Top

Left/Right Depth	Width	Number	①②③	Laminate A				Laminate B			
				T	J	V1	V2	T	J	V1	V2
24"(610mm)	48"(1219mm)	WUCK-4848-L	■ N44	\$1916.30	\$1983.86	\$2336.97	\$2372.31	\$1984.86	\$2052.42	\$2405.53	\$2440.87
30"(762mm)	48"(1219mm)	WUCK-4848-L	■ N55	\$1974.14	\$2041.70	\$2394.81	\$2437.65	\$2057.70	\$2125.26	\$2478.37	\$2521.21



WUCK

Features

- Includes rear worksurface, front worksurface, mechanism, and tie plate.
- Dual worksurfaces with a 1"(25mm) space between the front and rear worksurfaces. Front worksurface is 12"(305mm) deep.
- Laminate with:
 - 3mm full perimeter T-mold (T), or
 - 3mm edgeband (J) or Cascade (V) edge on front and rear worksurface front edge, and 1mm on back and side edge of front and rear worksurface.
- Adjustable front worksurface is attached to the rear worksurface with a spring-assist mechanism.
- Front worksurface manually adjusts to any position 7"(178mm) above and 5 3/4"(146mm) below the rear worksurface.
- Front worksurface tilts -15° to +9°.
- Spring assist mechanism available in charcoal finish color only.
- Optional wireway along back edge of worksurface is color-matched to solid side/back edge trim. When wood grain edge trim is specified, wireway will be Charcoal.
- Installed worksurfaces without wireway will not allow clearance for power plug.**
- Depths and widths shown in nominal dimensions.
- Available on RUSH with Standard Core.

Specification Tips

- Corner bracket is required and must be separately specified.**
- Fixed-height rear worksurface predrilled to accept standard cantilever brackets.
- Worksurface support specific to product line and worksurface edge guidelines; must be separately specified; refer to Specification Guide for support and load.**
 - Corner bracket - REQUIRED
 - Cantilever bracket
 - Worksurface support panel

To Order, Specify:

T-Mold or Edgeband

- Product number.
- Laminate surface color.
- Edge trim color for T and J.

Cascade

- Product number.
- Laminate surface color.
- Side/back edgeband trim color.
- Front Cascade edge trim color for V1 and V2.

Note: Cascade translucent edge is priced as V2.

① Edge Options:

- T** T-Mold
- J** Edgeband
- V** Cascade

② Core Options:

- S** Standard ■
- G** Green, add \$109.26 list.



③ Wireway Options:

- A** Notched
- B** Curved
- C** Without


This page intentionally blank

Adaptable Worksurfaces — Laminate

Corner, 90° Wrap-Around Extended



(Right-hand orientation)
WUCE-R44



(Left-hand orientation)
WUCE-L44

Features

- Includes worksurface and tie plate.
- Laminate with:
 - Full perimeter T-mold (T), or
 - 3mm edgeband (J) or knife edge (F) on user edge and 1mm edgeband on sides and back, or
 - Cascade (V) on user edge and 1mm edgeband on sides and back.
- Worksurfaces predrilled to accept most support options.
- Optional wireway along back edge of worksurface is color-matched to solid side/back edge trim. When wood grain edge trim is specified, wireway will be Charcoal. Refer to Specification Guide for wireway details.
- **Installed worksurfaces without wireway will not allow clearance for power plug.**
- Depths and widths shown in nominal dimensions.
- ◆ Available on RUSH with Standard Core.

Specification Tips

- **Corner bracket is required and must be separately specified.**
- **Worksurface support specific to product line and worksurface edge guidelines; must be separately specified; refer to Specification Guide for support and load.**
 - Corner bracket - REQUIRED
 - Cantilever bracket
 - Worksurface support panel
 - Worksurface support column or leg
 - Side brackets
 - Attached lower storage
- Knife edge requires use of worksurface supports for that application; worksurface support panel and/or side brackets for use with knife edge.
- Mini cantilever brackets are for use with 18”(457mm) deep worksurfaces with knife edge only.
- Recommend the KU4A-0023-■ N or KU3A-0023-■ keyboard pad for 36”(914mm)-wide corners.

Note: Separately specified worksurface reinforcement channels provide additional support for worksurfaces with 50”(1270mm) spans that are heavily loaded and not otherwise supported by mid-span cantilevers, worksurface support panels, columns, legs or attached lower storage.

To Order, Specify:

T-Mold, Edgeband, or Knife

- 1) Product number.
- 2) Laminate surface color.
- 3) Edge trim color for T, J and F.

Cascade

- 1) Product number.
- 2) Laminate surface color.
- 3) Side/back edgeband trim color.
- 4) Front Cascade edge trim color for V1 and V2.

Note: Cascade translucent edge is priced as V2.

1 Edge Options:

- T T-Mold
- J Edgeband
- V Cascade
- F Knife

2 Core Options:

- S Standard ◆
- G Green, add \$109.26 list.

3 Wireway Options:

- A Notched
- B Curved
- C Without

4 Orientation (as seated):

- R Right-hand
- L Left-hand

Adaptable Worksurfaces — Laminate



Corner, 90° Wrap-Around Extended

Left/Right Depth	Width	Length	Number	①②③④	Laminate A					Laminate B										
					T	J	V1	V2	F	T	J	V1	V2	F						
18"(457mm)	36"(914mm)	42"(1067mm)	WUCE-3642-L				33	◆	\$ 732.54	\$ 757.41	\$ 886.20	\$ 916.96	\$1017.31	\$ 778.15	\$ 803.02	\$ 931.81	\$ 962.57	\$1062.92		
		48"(1219mm)	WUCE-3648-L				33	◆	739.74	767.36	898.51	929.27	1037.45	785.88	813.50	944.65	975.41	1083.59		
		54"(1372mm)	WUCE-3654-L				33	◆	746.94	777.31	910.82	941.58	1057.59	793.61	823.98	957.49	988.25	1104.26		
		60"(1524mm)	WUCE-3660-L				33	◆	754.14	787.26	923.13	953.89	1077.73	801.34	834.46	970.33	1001.09	1124.93		
		66"(1676mm)	WUCE-3666-L				33	◆	834.62	870.49	1008.72	1039.48	1171.15	882.35	918.22	1056.45	1087.21	1218.88		
		72"(1829mm)	WUCE-3672-L				33	◆	902.57	941.19	1081.78	1112.54	1252.04	950.83	989.45	1130.04	1160.80	1300.30		
24"(610mm)	36"(914mm)	42"(1067mm)	WUCE-3642-L				44	◆	\$ 760.68	\$ 785.55	\$ 914.34	\$ 945.10	\$1045.45	\$ 808.53	\$ 833.40	\$ 962.19	\$ 992.95	\$1093.30		
		48"(1219mm)	WUCE-3648-L				44	◆	767.88	795.50	926.65	957.41	1065.59	816.26	843.88	975.03	1005.79	1113.97		
		54"(1372mm)	WUCE-3654-L				44	◆	775.08	805.45	938.96	969.72	1085.73	823.99	854.36	987.87	1018.63	1134.64		
		60"(1524mm)	WUCE-3660-L				44	◆	782.28	815.40	951.27	982.03	1105.87	831.72	864.84	1000.71	1031.47	1155.31		
		66"(1676mm)	WUCE-3666-L				44	◆	862.76	898.63	1036.86	1067.62	1199.29	912.73	948.60	1086.83	1117.59	1249.26		
		72"(1829mm)	WUCE-3672-L				44	◆	930.71	969.33	1109.92	1140.68	1280.18	981.21	1019.83	1160.42	1191.18	1330.68		
30"(762mm)	36"(914mm)	42"(1067mm) ⁽¹⁾	WUCE-3642-L				55	◆	\$ 907.63	\$ 932.50	N/A	N/A	\$1192.40	\$ 957.72	\$ 982.59	N/A	N/A	\$1242.49		
		48"(1219mm) ⁽¹⁾	WUCE-3648-L				55	◆	914.83	942.45	N/A	N/A	1212.54	965.45	993.07	N/A	N/A	1262.16		
		54"(1372mm) ⁽¹⁾	WUCE-3654-L				55	◆	922.03	952.40	N/A	N/A	1232.68	973.18	1003.55	N/A	N/A	1283.83		
		60"(1524mm) ⁽¹⁾	WUCE-3660-L				55	◆	929.23	962.35	N/A	N/A	1252.82	980.91	1014.03	N/A	N/A	1304.50		
		66"(1676mm) ⁽¹⁾	WUCE-3666-L				55	◆	1009.71	1045.58	N/A	N/A	1346.24	1061.92	1097.79	N/A	N/A	1398.45		
		72"(1829mm) ⁽¹⁾	WUCE-3672-L				55	◆	1077.66	1116.28	N/A	N/A	1427.13	1130.40	1169.02	N/A	N/A	1479.87		
18"(457mm)	42"(1067mm)	48"(1219mm)	WUCE-4248-L				33	◆	\$ 746.94	\$ 777.31	\$ 910.82	\$ 941.58	\$1057.59	\$ 793.61	\$ 823.98	\$ 957.49	\$ 988.25	\$1104.26		
		54"(1372mm)	WUCE-4254-L				33	◆	754.14	787.26	923.13	953.89	1077.73	801.34	834.46	970.33	1001.09	1124.93		
		60"(1524mm)	WUCE-4260-L				33	◆	761.34	797.21	935.44	966.20	1097.87	809.07	844.94	983.17	1013.93	1145.60		
		66"(1676mm)	WUCE-4266-L				33	◆	860.14	898.76	1039.35	1070.11	1209.61	908.40	947.02	1087.61	1118.37	1257.87		
		72"(1829mm)	WUCE-4272-L				33	◆	928.09	969.46	1112.41	1143.17	1290.50	976.88	1018.25	1161.20	1191.96	1339.29		
		48"(1219mm)	WUCE-4248-L				44	◆	\$ 775.08	\$ 805.45	\$ 938.96	\$ 969.72	\$1085.73	\$ 823.99	\$ 854.36	\$ 987.87	\$1018.63	\$1134.64		
24"(610mm)	42"(1067mm)	54"(1372mm)	WUCE-4254-L				44	◆	782.28	815.40	951.27	982.03	1105.87	831.72	864.84	1000.71	1031.47	1155.31		
		60"(1524mm)	WUCE-4260-L				44	◆	789.48	825.35	963.58	994.34	1126.01	839.45	875.32	1013.55	1044.31	1175.98		
		66"(1676mm)	WUCE-4266-L				44	◆	888.28	926.90	1067.49	1098.25	1237.75	938.78	977.40	1117.99	1148.75	1288.25		
		72"(1829mm)	WUCE-4272-L				44	◆	956.23	997.60	1140.55	1171.31	1318.64	1007.26	1048.63	1191.58	1222.34	1369.67		
		48"(1067mm)	WUCE-4248-L				55	◆	\$ 922.03	\$ 952.40	\$1085.91	\$1116.67	\$1232.68	\$ 973.18	\$1003.55	\$1137.06	\$1167.82	\$1283.83		
		54"(1372mm)	WUCE-4254-L				55	◆	929.23	962.35	1098.22	1128.98	1252.82	980.91	1014.03	1149.90	1180.66	1304.50		
30"(762mm)	42"(1067mm)	60"(1524mm)	WUCE-4260-L				55	◆	936.43	972.30	1110.53	1141.29	1272.96	988.64	1024.51	1162.74	1193.50	1325.17		
		66"(1676mm)	WUCE-4266-L				55	◆	1035.23	1073.85	1214.44	1245.20	1384.70	1087.97	1126.59	1267.18	1297.94	1437.44		
		72"(1829mm)	WUCE-4272-L				55	◆	1103.18	1144.55	1287.50	1318.26	1465.59	1156.45	1197.82	1340.77	1371.53	1518.86		
		48"(1219mm)	WUCE-4854-L				33	◆	\$ 761.34	\$ 797.21	\$ 935.44	\$ 966.20	\$1097.87	\$ 809.07	\$ 844.94	\$ 983.17	\$1013.93	\$1145.60		
		60"(1524mm)	WUCE-4860-L				33	◆	768.54	807.16	947.75	978.51	1118.01	816.80	855.42	996.01	1026.77	1166.27		
		66"(1676mm)	WUCE-4866-L				33	◆	885.66	927.03	1069.98	1100.74	1248.07	934.45	975.82	1118.77	1149.53	1296.86		
18"(457mm)	48"(1219mm)	72"(1829mm)	WUCE-4872-L				33	◆	953.61	997.73	1143.04	1173.80	1328.96	1002.93	1047.05	1192.36	1223.12	1378.28		
		24"(610mm)	54"(1372mm)	WUCE-4854-L				44	◆	\$ 789.48	\$ 825.35	\$ 963.58	\$ 994.34	\$1126.01	\$ 839.45	\$ 875.32	\$1013.55	\$1044.31	\$1175.98	
		60"(1524mm)	WUCE-4860-L				44	◆	796.68	835.30	975.89	1006.65	1146.15	847.18	885.80	1026.39	1057.15	1196.65		
		66"(1676mm)	WUCE-4866-L				44	◆	913.80	955.17	1098.12	1128.88	1276.21	964.83	1006.20	1149.15	1179.91	1327.24		
		72"(1829mm)	WUCE-4872-L				44	◆	981.75	1025.87	1171.18	1201.94	1357.10	1033.31	1077.43	1222.74	1253.50	1408.66		
		30"(762mm)	48"(1219mm)	54"(1372mm)	WUCE-4854-L				55	◆	\$ 936.43	\$ 972.30	\$1110.53	\$1141.29	\$1272.96	\$ 988.64	\$1024.51	\$1162.74	\$1193.50	\$1325.17
18"(457mm)	54"(1372mm)	60"(1524mm)	WUCE-4860-L				55	◆	943.63	982.25	1122.84	1153.60	1293.10	996.37	1034.99	1175.58	1206.34	1345.84		
		66"(1676mm)	WUCE-4866-L				55	◆	1060.75	1102.12	1245.07	1275.83	1423.16	1114.02	1155.39	1298.34	1329.10	1476.43		
		72"(1829mm)	WUCE-4872-L				55	◆	1128.70	1172.82	1318.13	1348.89	1504.05	1182.50	1226.62	1371.93	1402.69	1557.85		
		24"(610mm)	60"(1524mm)	WUCE-5460-L				44	◆	\$ 775.74	\$ 817.11	\$ 960.06	\$ 990.82	\$1138.15	\$ 824.53	\$ 865.90	\$1008.85	\$1039.61	\$1186.94	
		66"(1676mm)	WUCE-5466-L				33	◆	911.18	955.30	1100.61	1131.37	1286.53	960.50	1004.62	1149.93	1180.69	1335.85		
		72"(1829mm)	WUCE-5472-L				33	◆	979.13	1026.00	1173.67	1204.43	1367.42	1028.98	1075.85	1223.52	1254.28	1417.27		
24"(610mm)	54"(1372mm)	66"(1676mm)	WUCE-5460-L				44	◆	\$ 803.88	\$ 845.25	\$ 988.20	\$1018.96	\$1166.29	\$ 854.91	\$ 896.28	\$1039.23	\$1069.99	\$1217.32		
		66"(1676mm)	WUCE-5466-L				44	◆	939.32	983.44	1128.75	1159.51	1314.67	990.88	1035.00	1180.31	1211.07	1366.23		
		72"(1829mm)	WUCE-5472-L				44	◆	1007.27	1054.14	1201.81	1232.57	1395.56	1059.36	1106.23	1253.90	1284.66	1447.65		
		30"(762mm)	54"(1372mm)	60"(1524mm)	WUCE-5460-L				55	◆	\$ 950.83	\$ 992.20	\$1135.15	\$1165.91	\$1313.24	\$1004.10	\$1045.47	\$1188.42	\$1219.18	\$1366.51
		66"(1676mm)	WUCE-5466-L				55	◆	1086.27	1130.39	1275.70	1306.46	1461.62	1140.07	1184.19	1329.50	1360.26	1515.42		
		72"(1829mm)	WUCE-5472-L				55	◆	1154.22	1201.09	1348.76	1379.52	1542.51	1208.55	1255.42	1403.09	1433.85	1596.84		
18"(457mm)	60"(1524mm)	66"(1676mm)	WUCE-6066-L				33	◆	\$ 936.70	\$ 983.57	\$1131.24	\$1162.00	\$1324.99	\$ 986.55	\$1033.42	\$1181.09	\$1211.85	\$1374.84		
		72"(1829mm)	WUCE-6072-L				33	◆	1004.65	1054.27	1204.30	1235.06	1405.88	1055.03	1104.65	1254.68	1285.44	1456.26		
		24"(610mm)	60"(1524mm)	66"(1676mm)	WUCE-6066-L				44	◆	\$ 964.84	\$1011.71	\$1159.38	\$1190.14	\$1353.13	\$1016.93	\$1063.80	\$1211.47	\$1242.23	\$1405.22
		72"(1829mm)	WUCE-6072-L				44	◆	1032.79	1082.41	1232.44	1263.20	1434.02	1085.41	1135.03	1285.06	1315.82	1486.64		
		30"(762mm)	60"(1524mm)	66"(1676mm)	WUCE-6066-L				55	◆	\$1111.79	\$1158.66	\$1306.33	\$1337.09	\$1500.08	\$1166.12	\$1212.99	\$1360.66	\$1391.42	\$1554.41
		72"(1829mm)	WUCE-6072-L				55	◆	1179.74	1229.36	1379.39	1410.15	1580.97	1234.60	1284.22	1434.25	1465.01	1635.83		


⁽¹⁾Cascade edge option not available in these sizes.

Adaptable Worksurfaces — Laminate

Corner, 90° Notched Extended



(Right-hand orientation)
WUCP-R44



(Left-hand orientation)
WUCP-L44

Features

- Includes worksurface and tie plate.
- Laminate with:
 - Full perimeter T-mold (T), or
 - 3mm edgeband (J) or knife edge (F) on user edge and 1mm edgeband on sides and back, or
 - Cascade (V) on user edge and 1mm edgeband on sides and back.
- Worksurfaces predrilled to accept most support options.
- Optional wireways along back edges are color-matched to solid side/back edge trim. When wood grain laminate is specified, wireways will be Charcoal. Refer to Specification Guide for wireway details.
- **Installed worksurfaces without wireway will not allow clearance for power plug.**
- Depths and widths shown in nominal dimensions.
- ◆ Available on RUSH with Standard Core.

Specification Tips

- **Corner bracket is required and must be separately specified.**
- **Worksurface support specific to product line and worksurface edge guidelines; must be separately specified; refer to Specification Guide for support and load.**
 - Corner bracket - REQUIRED
 - Cantilever bracket
 - Worksurface support panel
 - Side brackets
 - Disc Base
 - Support post or support column
 - Attached lower storage
- Knife edge requires use of worksurface supports for that application; worksurface support panel and/or side brackets for use with knife edge.
- Mini cantilever brackets are for use with 18”(457mm) deep worksurfaces with knife edge only.
- Recommend the KU4A-0023-■ N or KU3A-0023-■ keyboard pad for 36”(914mm)-wide corners.

Note: Separately specified worksurface reinforcement channels provide additional support for worksurfaces with 50”(1270mm) spans that are heavily loaded and not otherwise supported by mid-span cantilevers, worksurface end panels, legs or attached storage.

To Order, Specify:

T-Mold, Edgeband, or Knife

- 1) Product number.
- 2) Laminate surface color.
- 3) Edge trim color for T, J and F.

Cascade

- 1) Product number.
- 2) Laminate surface color.
- 3) Side/back edgeband trim color.
- 4) Front Cascade edge trim color for V1 and V2.

Note: Cascade translucent edge is priced as V2.

1 Edge Options:

- T T-Mold
- J Edgeband
- V Cascade
- F Knife

2 Core Options:

- S Standard ◆
- G Green, add \$109.26 list.

3 Wireway Options:

- A Notched
- B Curved
- C Without

4 Orientation (as seated):

- R Right-hand
- L Left-hand

Adaptable Worksurfaces — Laminate


Corner, 90° Notched Extended

Left/Right Depth	Width	Length	Number	①②③④	Laminate A					Laminate B								
					T	J	V1	V2	F	T	J	V1	V2	F				
18"(457mm)	36"(914mm)	42"(1067mm)	WUCP-3642-L				33	■	\$ 750.32	\$ 757.34	\$ 885.66	\$ 916.72	\$1026.21	\$ 804.95	\$ 811.97	\$ 940.29	\$ 971.35	\$1080.84
		48"(1219mm)	WUCP-3648-L				33	■	770.23	778.78	909.86	940.92	1058.24	826.30	834.85	965.93	996.99	1114.31
		54"(1372mm)	WUCP-3654-L				33	■	790.14	800.22	934.06	965.12	1090.27	847.65	857.73	991.57	1022.63	1147.78
		60"(1524mm)	WUCP-3660-L				33	■	810.05	821.66	958.26	989.32	1122.30	869.00	880.61	1017.21	1048.27	1181.25
		66"(1676mm)	WUCP-3666-L				33	■	829.96	843.10	982.46	1013.52	1154.33	890.35	903.49	1042.85	1073.91	1214.72
		72"(1829mm)	WUCP-3672-L				33	■	966.63	981.30	1123.42	1154.48	1303.12	1028.46	1043.13	1185.25	1216.31	1364.95
24"(610mm)	36"(914mm)	42"(1067mm)	WUCP-3642-L				44	■	\$ 774.52	\$ 781.54	\$ 909.86	\$ 940.92	\$1050.41	\$ 831.09	\$ 838.11	\$ 966.43	\$ 997.49	\$1106.98
		48"(1219mm)	WUCP-3648-L				44	■	794.43	802.98	934.06	965.12	1082.44	852.44	860.99	992.07	1023.13	1140.45
		54"(1372mm)	WUCP-3654-L				44	■	814.34	824.42	958.26	989.32	1114.47	873.79	883.87	1017.71	1048.77	1173.92
		60"(1524mm)	WUCP-3660-L				44	■	834.25	845.86	982.46	1013.52	1146.50	895.14	906.75	1043.35	1074.41	1207.39
		66"(1676mm)	WUCP-3666-L				44	■	854.16	867.30	1006.66	1037.72	1178.53	916.49	929.63	1068.99	1100.05	1240.86
		72"(1829mm)	WUCP-3672-L				44	■	990.83	1005.50	1147.62	1178.68	1327.32	1054.60	1069.27	1211.39	1242.45	1391.09
30"(762mm)	36"(914mm)	42"(1067mm) ⁽¹⁾	WUCP-3642-L				55	■	\$ 798.72	\$ 805.74	N/A	N/A	\$1074.61	\$ 857.23	\$ 864.25	N/A	N/A	\$1133.12
		48"(1219mm) ⁽¹⁾	WUCP-3648-L				55	■	818.63	827.18	N/A	N/A	1106.64	878.58	887.13	N/A	N/A	1166.59
		54"(1372mm) ⁽¹⁾	WUCP-3654-L				55	■	838.54	848.62	N/A	N/A	1138.67	899.93	910.01	N/A	N/A	1200.06
		60"(1524mm) ⁽¹⁾	WUCP-3660-L				55	■	858.45	870.06	N/A	N/A	1170.70	921.28	932.89	N/A	N/A	1233.53
		66"(1676mm) ⁽¹⁾	WUCP-3666-L				55	■	878.36	891.50	N/A	N/A	1202.73	942.63	955.77	N/A	N/A	1267.00
		72"(1829mm) ⁽¹⁾	WUCP-3672-L				55	■	1015.03	1029.70	N/A	N/A	1351.52	1080.74	1095.41	N/A	N/A	1417.23
18"(457mm)	42"(1067mm)	48"(1219mm)	WUCP-4248-L				33	■	\$ 790.14	\$ 800.22	\$ 934.06	\$ 965.12	\$1090.27	\$ 847.65	\$ 857.73	\$ 991.57	\$1022.63	\$1147.78
		54"(1372mm)	WUCP-4254-L				33	■	810.05	821.66	958.26	989.32	1122.30	869.00	880.61	1017.21	1048.27	1181.25
		60"(1524mm)	WUCP-4260-L				33	■	829.96	843.10	982.46	1013.52	1154.33	890.35	903.49	1042.85	1073.91	1214.72
		66"(1676mm)	WUCP-4266-L				33	■	849.87	864.54	1006.66	1037.72	1186.36	911.70	926.37	1068.49	1099.55	1248.19
		72"(1829mm)	WUCP-4272-L				33	■	986.54	1002.74	1147.62	1178.68	1335.15	1049.81	1066.01	1210.89	1241.95	1398.42
		48"(1219mm)	WUCP-4248-L				44	■	\$ 814.34	\$ 824.42	\$ 958.26	\$ 989.32	\$1114.47	\$ 873.79	\$ 883.87	\$1017.71	\$1048.77	\$1173.92
24"(610mm)	42"(1067mm)	54"(1372mm)	WUCP-4254-L				44	■	834.25	845.86	982.46	1013.52	1146.50	895.14	906.75	1043.35	1074.41	1207.39
		60"(1524mm)	WUCP-4260-L				44	■	854.16	867.30	1006.66	1037.72	1178.53	916.49	929.63	1068.99	1100.05	1240.86
		66"(1676mm)	WUCP-4266-L				44	■	874.07	888.74	1030.86	1061.92	1210.56	937.84	952.51	1094.63	1125.69	1274.33
		72"(1829mm)	WUCP-4272-L				44	■	1010.74	1026.94	1171.82	1202.88	1359.35	1075.95	1092.15	1237.03	1268.09	1424.56
		48"(1219mm)	WUCP-4248-L				55	■	\$ 838.54	\$ 848.62	\$ 982.46	\$1013.52	\$1138.67	\$ 899.93	\$ 910.01	\$1043.85	\$1074.91	\$1200.06
		54"(1372mm)	WUCP-4254-L				55	■	858.45	870.06	1006.66	1037.72	1170.70	921.28	932.89	1069.49	1100.55	1233.53
30"(762mm)	42"(1067mm)	60"(1524mm)	WUCP-4260-L				55	■	878.36	891.50	1030.86	1061.92	1202.73	942.63	955.77	1095.13	1126.19	1267.00
		66"(1676mm)	WUCP-4266-L				55	■	898.27	912.94	1055.06	1086.12	1234.76	963.98	978.65	1120.77	1151.83	1300.47
		72"(1829mm)	WUCP-4272-L				55	■	1034.94	1051.14	1196.02	1227.08	1383.55	1102.09	1118.29	1263.17	1294.23	1450.70
		48"(1219mm)	WUCP-4248-L				33	■	\$ 829.96	\$ 843.10	\$ 982.46	\$1013.52	\$1154.33	\$ 890.35	\$ 903.49	\$1042.85	\$1073.91	\$1214.72
		60"(1524mm)	WUCP-4860-L				33	■	849.87	864.54	1006.66	1037.72	1186.36	911.70	926.37	1068.49	1099.55	1248.19
		66"(1676mm)	WUCP-4866-L				33	■	869.78	885.98	1030.86	1061.92	1218.39	933.05	949.25	1094.13	1125.19	1281.66
24"(610mm)	48"(1219mm)	72"(1829mm)	WUCP-4872-L				33	■	1006.45	1024.18	1171.82	1202.88	1367.18	1071.16	1088.89	1236.53	1267.59	1431.89
		54"(1372mm)	WUCP-4854-L				44	■	\$ 854.16	\$ 867.30	\$1006.66	\$1037.72	\$1178.53	\$ 916.49	\$ 929.63	\$1068.99	\$1100.05	\$1240.86
		60"(1524mm)	WUCP-4860-L				44	■	874.07	888.74	1030.86	1061.92	1210.56	937.84	952.51	1094.63	1125.69	1274.33
		66"(1676mm)	WUCP-4866-L				44	■	893.98	910.18	1055.06	1086.12	1242.59	959.19	975.39	1120.27	1151.33	1307.80
		72"(1829mm)	WUCP-4872-L				44	■	1030.65	1048.38	1196.02	1227.08	1391.38	1097.30	1115.03	1262.67	1293.73	1458.03
		54"(1372mm)	WUCP-4854-L				55	■	\$ 878.36	\$ 891.50	\$1030.86	\$1061.92	\$1202.73	\$ 942.63	\$ 955.77	\$1095.13	\$1126.19	\$1267.00
30"(762mm)	48"(1219mm)	60"(1524mm)	WUCP-4860-L				55	■	898.27	912.94	1055.06	1086.12	1234.76	963.98	978.65	1120.77	1151.83	1300.47
		66"(1676mm)	WUCP-4866-L				55	■	918.18	934.38	1079.26	1110.32	1266.79	985.33	1001.53	1146.41	1177.47	1333.94
		72"(1829mm)	WUCP-4872-L				55	■	1054.85	1072.58	1220.22	1251.28	1415.58	1123.44	1141.17	1288.81	1319.87	1484.17
		54"(1372mm)	WUCP-4854-L				33	■	\$ 869.78	\$ 885.98	\$1030.86	\$1061.92	\$1218.39	\$ 933.05	\$ 949.25	\$1094.13	\$1125.19	\$1281.66
		66"(1676mm)	WUCP-5466-L				33	■	889.69	907.42	1055.06	1086.12	1250.42	954.40	972.13	1119.77	1150.83	1315.13
		72"(1829mm)	WUCP-5472-L				33	■	1026.36	1045.62	1196.02	1227.08	1399.21	1092.51	1111.77	1262.17	1293.23	1465.36
24"(610mm)	54"(1372mm)	60"(1524mm)	WUCP-5460-L				44	■	\$ 893.98	\$ 910.18	\$1055.06	\$1086.12	\$1242.59	\$ 959.19	\$ 975.39	\$1120.27	\$1151.33	\$1307.80
		66"(1676mm)	WUCP-5466-L				44	■	913.89	931.62	1079.26	1110.32	1274.62	980.54	998.27	1145.91	1176.97	1341.27
		72"(1829mm)	WUCP-5472-L				44	■	1050.56	1069.82	1220.22	1251.28	1423.41	1118.65	1137.91	1288.31	1319.37	1491.50
30"(762mm)	54"(1372mm)	60"(1524mm)	WUCP-5460-L				55	■	\$ 918.18	\$ 934.38	\$1079.26	\$1110.32	\$1266.79	\$ 985.33	\$1001.53	\$1146.41	\$1177.47	\$1333.94
		66"(1676mm)	WUCP-5466-L				55	■	938.09	955.82	1103.46	1134.52	1298.82	1006.68	1024.41	1172.05	1203.11	1367.41
		72"(1829mm)	WUCP-5472-L				55	■	1074.76	1094.02	1244.42	1275.48	1447.61	1144.79	1164.05	1314.45	1345.51	1517.64
18"(457mm)	60"(1524mm)	66"(1676mm)	WUCP-6066-L				33	■	\$ 909.60	\$ 928.86	\$1079.26	\$1110.32	\$1282.45	\$ 975.75	\$ 995.01	\$1145.41	\$1176.47	\$1348.60
		72"(1829mm)	WUCP-6072-L				33	■	1046.27	1067.06	1220.22	1251.28	1431.24	1113.86	1134.65	1287.81	1318.87	1498.83
24"(610mm)	60"(1524mm)	66"(1676mm)	WUCP-6066-L				44	■	\$ 933.80	\$ 953.06	\$1103.46	\$1134.52	\$1306.65	\$1001.89	\$1021.15	\$1171.55	\$1202.61	\$1374.74
		72"(1829mm)	WUCP-6072-L				44	■	1070.47	1091.26	1244.42	1275.48	1455.44	1140.00	1160.79	1313.95	1345.01	1524.97
30"(762mm)	60"(1524mm)	66"(1676mm)	WUCP-6066-L				55	■	\$ 958.00	\$ 977.26	\$1127.66	\$1158.72	\$1330.85	\$1028.03	\$1047.29	\$1197.69	\$1228.75	\$1400.88
		72"(1829mm)	WUCP-6072-L				55	■	1094.67	1115.46	1268.62	1299.68	1479.64	1166.14	1186.93	1340.09	1371.15	1551.11


⁽¹⁾Cascade edge option not available in these sizes.

Adaptable Worksurfaces — Laminate

Corner, 90° Wrap-Around Transitional Extended



(Right-hand orientation)



(Left-hand orientation)
WUCX-L43

Features

- Includes worksurface and tie plate.
- Laminate with:
 - Full perimeter T-mold (T), or
 - 3mm edgeband (J) or knife edge (F) on user edge and 1mm edgeband on sides and back, or
 - Cascade (V) on user edge and 1mm edgeband on sides and back.
- Worksurfaces predrilled to accept most support options.
- Optional wireway along back edges of worksurface is color-matched to solid side/back edge trim. When wood grain edge trim laminate is specified, wireway will be Charcoal. Refer to Specification Guide for wireway details.
- **Installed worksurfaces without wireway will not allow clearance for power plug.**
- Depths and widths shown in nominal dimensions.
- ◆ Available on RUSH with Standard Core.

Specification Tips

- **Corner bracket is required and must be separately specified.**
- **Worksurface support specific to product line and worksurface edge guidelines; must be separately specified; refer to Specification Guide for support and load.**
 - Corner bracket - REQUIRED
 - Cantilever bracket
 - Worksurface support panel
 - Support post or support column
 - Side brackets
 - Attached lower storage
- Knife edge requires use of worksurface supports for that application; worksurface support panel and/or side brackets for use with knife edge.
- Mini cantilever brackets are for use with 18”(457mm) deep worksurfaces with knife edge only.
- Intermediate support is required for unsupported worksurface span greater than 60”(1524mm).
- Recommend the KU4A-0023-■ N or KU3A-0023-■ keyboard pad for 36”(914mm)-wide corners.

Note: Separately specified worksurface reinforcement channels provide additional support for worksurfaces with 50”(1270mm) spans that are heavily loaded and not otherwise supported by mid-span cantilevers, worksurface support panels, columns, legs or attached lower storage.

To Order, Specify:

T-Mold, Edgeband, or Knife

- 1) Product number.
- 2) Laminate surface color.
- 3) Edge trim color for T, J and F.

Cascade

- 1) Product number.
- 2) Laminate surface color.
- 3) Side/back edgeband trim color.
- 4) Front Cascade edge trim color for V1 and V2.

Note: Cascade translucent edge is priced as V2.

1 Edge Options:

- T T-Mold
- J Edgeband
- V Cascade
- F Knife

2 Core Options:

- S Standard ◆
- G Green, add \$109.26 list.

3 Wireway Options:

- A Notched
- B Curved
- C Without

4 Orientation (as seated):

- R Right-hand
- L Left-hand

Adaptable Worksurfaces — Laminate

Corner, 90° Wrap-Around Transitional Extended

Left/Right Depth	Width	Length	Number	①②③④	Laminate A					Laminate B				
					T	J	V1	V2	F	T	J	V1	V2	F
18"(457mm)/ 24"(66mm)	36"(914mm)	42"(1067mm)	WUCX-3642-L	34	\$ 829.35	\$ 854.22	\$ 983.01	\$1013.77	\$1114.12	\$ 876.08	\$ 900.95	\$1029.74	\$1060.50	\$1160.85
		48"(1219mm)	WUCX-3648-L	34	\$ 836.55	\$ 864.17	\$ 995.32	\$1026.08	\$1134.26	\$ 883.81	\$ 911.43	\$1042.58	\$1073.34	\$1181.52
		54"(1372mm)	WUCX-3654-L	34	\$ 843.75	\$ 874.12	\$1007.63	\$1038.39	\$1154.40	\$ 891.54	\$ 921.91	\$1055.42	\$1086.18	\$1202.19
		60"(1524mm)	WUCX-3660-L	34	\$ 850.95	\$ 884.07	\$1019.94	\$1050.70	\$1174.54	\$ 899.27	\$ 932.39	\$1068.26	\$1099.02	\$1222.86
		66"(1676mm)	WUCX-3666-L	34	\$ 931.43	\$ 967.30	\$1105.53	\$1136.29	\$1267.96	\$ 980.28	\$ 1016.15	\$1154.38	\$1185.14	\$1316.81
24"(610mm)/ 18"(457mm)	36"(914mm)	42"(1067mm)	WUCX-3672-L	34	\$ 999.38	\$1038.00	\$1178.59	\$1209.35	\$1348.85	\$1048.76	\$1087.38	\$1227.97	\$1258.73	\$1398.23
		42"(1067mm)	WUCX-3642-L	43	\$ 829.35	\$ 854.22	\$ 983.01	\$1013.77	\$1114.12	\$ 876.08	\$ 900.95	\$1029.74	\$1060.50	\$1160.85
		48"(1219mm)	WUCX-3648-L	43	\$ 836.55	\$ 864.17	\$ 995.32	\$1026.08	\$1134.26	\$ 883.81	\$ 911.43	\$1042.58	\$1073.34	\$1181.52
		54"(1372mm)	WUCX-3654-L	43	\$ 843.75	\$ 874.12	\$1007.63	\$1038.39	\$1154.40	\$ 891.54	\$ 921.91	\$1055.42	\$1086.18	\$1202.19
		60"(1524mm)	WUCX-3660-L	43	\$ 850.95	\$ 884.07	\$1019.94	\$1050.70	\$1174.54	\$ 899.27	\$ 932.39	\$1068.26	\$1099.02	\$1222.86
24"(610mm)/ 30"(762mm)	36"(914mm)	66"(1676mm)	WUCX-3666-L	43	\$ 931.43	\$ 967.30	\$1105.53	\$1136.29	\$1267.96	\$ 980.28	\$ 1016.15	\$1154.38	\$1185.14	\$1316.81
		72"(1829mm)	WUCX-3672-L	43	\$ 999.38	\$1038.00	\$1178.59	\$1209.35	\$1348.85	\$1048.76	\$1087.38	\$1227.97	\$1258.73	\$1398.23
		42"(1067mm) ⁽¹⁾	WUCX-3642-L	45	\$ 857.49	\$ 882.36	N/A	N/A	\$1142.26	\$ 906.46	\$ 931.33	N/A	N/A	\$1191.23
		48"(1219mm) ⁽¹⁾	WUCX-3648-L	45	\$ 864.69	\$ 892.31	N/A	N/A	\$1162.40	\$ 914.19	\$ 941.81	N/A	N/A	\$1211.90
		54"(1372mm) ⁽¹⁾	WUCX-3654-L	45	\$ 871.89	\$ 902.26	N/A	N/A	\$1182.54	\$ 921.92	\$ 952.29	N/A	N/A	\$1232.57
30"(762mm)/ 24"(610mm)	36"(914mm)	60"(1524mm) ⁽¹⁾	WUCX-3660-L	45	\$ 879.09	\$ 912.21	N/A	N/A	\$1202.68	\$ 929.65	\$ 962.77	N/A	N/A	\$1253.24
		66"(1676mm) ⁽¹⁾	WUCX-3666-L	45	\$ 959.57	\$ 995.44	N/A	N/A	\$1296.10	\$1010.66	\$1046.53	N/A	N/A	\$1347.19
		72"(1829mm) ⁽¹⁾	WUCX-3672-L	45	\$ 1027.52	\$1066.14	N/A	N/A	\$1376.99	\$1079.14	\$1117.76	N/A	N/A	\$1428.61
		42"(1067mm) ⁽¹⁾	WUCX-3642-L	54	\$ 857.49	\$ 882.36	N/A	N/A	\$1142.26	\$ 906.46	\$ 931.33	N/A	N/A	\$1191.23
		48"(1219mm) ⁽¹⁾	WUCX-3648-L	54	\$ 864.69	\$ 892.31	N/A	N/A	\$1162.40	\$ 914.19	\$ 941.81	N/A	N/A	\$1211.90
18"(457mm)/ 24"(610mm)	42"(1067mm)	54"(1372mm) ⁽¹⁾	WUCX-3654-L	54	\$ 871.89	\$ 902.26	N/A	N/A	\$1182.54	\$ 921.92	\$ 952.29	N/A	N/A	\$1232.57
		60"(1524mm) ⁽¹⁾	WUCX-3660-L	54	\$ 879.09	\$ 912.21	N/A	N/A	\$1202.68	\$ 929.65	\$ 962.77	N/A	N/A	\$1253.24
		66"(1676mm) ⁽¹⁾	WUCX-3666-L	54	\$ 959.57	\$ 995.44	N/A	N/A	\$1296.10	\$1010.66	\$1046.53	N/A	N/A	\$1347.19
		72"(1829mm) ⁽¹⁾	WUCX-3672-L	54	\$ 1027.52	\$1066.14	N/A	N/A	\$1376.99	\$1079.14	\$1117.76	N/A	N/A	\$1428.61
		48"(1219mm)	WUCX-4248-L	34	\$ 843.75	\$ 874.12	\$1007.63	\$1038.39	\$1154.40	\$ 891.54	\$ 921.91	\$1055.42	\$1086.18	\$1202.19
24"(610mm)/ 18"(457mm)	42"(1067mm)	54"(1372mm)	WUCX-4254-L	34	\$ 850.95	\$ 884.07	\$1019.94	\$1050.70	\$1174.54	\$ 899.27	\$ 932.39	\$1068.26	\$1099.02	\$1222.86
		60"(1524mm)	WUCX-4260-L	34	\$ 858.15	\$ 894.02	\$1032.25	\$1063.01	\$1194.68	\$ 907.00	\$ 942.87	\$1081.10	\$1111.86	\$1243.53
		66"(1676mm)	WUCX-4266-L	34	\$ 956.95	\$ 995.57	\$1136.16	\$1166.92	\$1306.42	\$1006.33	\$1044.95	\$1185.54	\$1216.30	\$1355.80
		72"(1829mm)	WUCX-4272-L	34	\$ 1024.90	\$1066.27	\$1209.22	\$1239.98	\$1387.31	\$1074.81	\$1116.18	\$1259.13	\$1289.89	\$1437.22
		48"(1219mm)	WUCX-4248-L	43	\$ 843.75	\$ 874.12	\$1007.63	\$1038.39	\$1154.40	\$ 891.54	\$ 921.91	\$1055.42	\$1086.18	\$1202.19
24"(610mm)/ 30"(762mm)	42"(1067mm)	54"(1372mm)	WUCX-4254-L	43	\$ 850.95	\$ 884.07	\$1019.94	\$1050.70	\$1174.54	\$ 899.27	\$ 932.39	\$1068.26	\$1099.02	\$1222.86
		60"(1524mm)	WUCX-4260-L	43	\$ 858.15	\$ 894.02	\$1032.25	\$1063.01	\$1194.68	\$ 907.00	\$ 942.87	\$1081.10	\$1111.86	\$1243.53
		66"(1676mm)	WUCX-4266-L	43	\$ 956.95	\$ 995.57	\$1136.16	\$1166.92	\$1306.42	\$1006.33	\$1044.95	\$1185.54	\$1216.30	\$1355.80
		72"(1829mm)	WUCX-4272-L	43	\$ 1024.90	\$1066.27	\$1209.22	\$1239.98	\$1387.31	\$1074.81	\$1116.18	\$1259.13	\$1289.89	\$1437.22
		48"(1219mm)	WUCX-4248-L	45	\$ 871.89	\$ 902.26	\$1035.77	\$1066.53	\$1182.54	\$ 921.92	\$ 952.29	\$1085.80	\$1116.56	\$1232.57
30"(762mm)/ 24"(610mm)	42"(1067mm)	54"(1372mm)	WUCX-4254-L	45	\$ 879.09	\$ 912.21	\$1048.08	\$1078.84	\$1202.68	\$ 929.65	\$ 962.77	\$1098.64	\$1129.40	\$1253.24
		60"(1524mm)	WUCX-4260-L	45	\$ 886.29	\$ 922.16	\$1060.39	\$1091.15	\$1222.82	\$ 937.38	\$ 973.25	\$1111.48	\$1142.24	\$1273.91
		66"(1676mm)	WUCX-4266-L	45	\$ 985.09	\$1023.71	\$1164.30	\$1195.06	\$1334.56	\$1036.71	\$1075.33	\$1215.92	\$1246.68	\$1386.18
		72"(1829mm)	WUCX-4272-L	45	\$ 1053.04	\$1094.41	\$1237.36	\$1268.12	\$1415.45	\$1105.19	\$1146.56	\$1289.51	\$1320.27	\$1467.60
		48"(1067mm)	WUCX-4248-L	54	\$ 871.89	\$ 902.26	\$1035.77	\$1066.53	\$1182.54	\$ 921.92	\$ 952.29	\$1085.80	\$1116.56	\$1232.57
18"(457mm)/ 24"(610mm)	48"(1219mm)	54"(1372mm)	WUCX-4854-L	34	\$ 858.15	\$ 894.02	\$1032.25	\$1063.01	\$1194.68	\$ 907.00	\$ 942.87	\$1081.10	\$1111.86	\$1243.53
		60"(1524mm)	WUCX-4860-L	34	\$ 865.35	\$ 903.97	\$1044.56	\$1075.32	\$1214.82	\$ 914.73	\$ 953.35	\$1093.94	\$1124.70	\$1264.20
		66"(1676mm)	WUCX-4866-L	34	\$ 982.47	\$1023.84	\$1166.79	\$1197.55	\$1344.88	\$1032.38	\$1073.75	\$1216.70	\$1247.46	\$1394.79
		72"(1829mm)	WUCX-4872-L	34	\$ 1050.42	\$1094.54	\$1239.85	\$1270.61	\$1425.77	\$1100.86	\$1144.98	\$1290.29	\$1321.05	\$1476.21
		54"(1372mm)	WUCX-4854-L	43	\$ 858.15	\$ 894.02	\$1032.25	\$1063.01	\$1194.68	\$ 907.00	\$ 942.87	\$1081.10	\$1111.86	\$1243.53
24"(610mm)/ 18"(457mm)	48"(1219mm)	60"(1524mm)	WUCX-4860-L	43	\$ 865.35	\$ 903.97	\$1044.56	\$1075.32	\$1214.82	\$ 914.73	\$ 953.35	\$1093.94	\$1124.70	\$1264.20
		66"(1676mm)	WUCX-4866-L	43	\$ 982.47	\$1023.84	\$1166.79	\$1197.55	\$1344.88	\$1032.38	\$1073.75	\$1216.70	\$1247.46	\$1394.79
		72"(1829mm)	WUCX-4872-L	43	\$ 1050.42	\$1094.54	\$1239.85	\$1270.61	\$1425.77	\$1100.86	\$1144.98	\$1290.29	\$1321.05	\$1476.21
		54"(1372mm)	WUCX-4854-L	45	\$ 886.29	\$ 922.16	\$1060.39	\$1091.15	\$1222.82	\$ 937.38	\$ 973.25	\$1111.48	\$1142.24	\$1273.91
		60"(1524mm)	WUCX-4860-L	45	\$ 893.49	\$ 932.11	\$1072.70	\$1103.46	\$1242.96	\$ 945.11	\$ 983.73	\$1124.32	\$1155.08	\$1294.58
24"(610mm)/ 30"(762mm)	48"(1219mm)	66"(1676mm)	WUCX-4866-L	45	\$ 1010.61	\$1051.98	\$1194.93	\$1225.69	\$1373.02	\$1062.76	\$1104.13	\$1247.08	\$1277.84	\$1425.17
		72"(1829mm)	WUCX-4872-L	45	\$ 1078.56	\$1122.68	\$1267.99	\$1298.75	\$1453.91	\$1131.24	\$1175.36	\$1320.67	\$1351.43	\$1506.59

⁽¹⁾Cascade edge option not available in these sizes.

Adaptable Worksurfaces — Laminate



Corner, 90° Wrap-Around Transitional Extended

Left/Right Depth	Width	Length	Number	①②③④	Laminate A					Laminate B				
					T	J	V1	V2	F	T	J	V1	V2	F
30"(762mm)/ 24"(610mm)	48"(1219mm)	54"(1372mm)	WUCX-4854-L	54	\$ 886.29	\$ 922.16	\$1060.39	\$1091.15	\$1222.82	\$ 937.38	\$ 973.25	\$1111.48	\$1142.24	\$1273.91
		60"(1524mm)	WUCX-4860-L	54	893.49	932.11	1072.70	1103.46	1242.96	945.11	983.73	1124.32	1155.08	1294.58
		66"(1676mm)	WUCX-4866-L	54	1010.61	1051.98	1194.93	1225.69	1373.02	1062.76	1104.13	1247.08	1277.84	1425.17
		72"(1829mm)	WUCX-4872-L	54	1078.56	1122.68	1267.99	1298.75	1453.91	1131.24	1175.36	1320.67	1351.43	1506.59
18"(457mm)/ 24"(610mm)	54"(1372mm)	60"(1524mm)	WUCX-5460-L	34	\$ 872.55	\$ 913.92	\$1056.87	\$1087.63	\$1234.96	\$ 922.46	\$ 963.83	\$1106.78	\$1137.54	\$1284.87
		66"(1676mm)	WUCX-5466-L	34	1007.99	1052.11	1197.42	1228.18	1383.34	1058.43	1102.55	1247.86	1278.62	1433.78
		72"(1829mm)	WUCX-5472-L	34	1075.94	1122.81	1270.48	1301.24	1464.23	1126.91	1173.78	1321.45	1352.21	1515.20
24"(610mm)/ 18"(457mm)	54"(1372mm)	60"(1524mm)	WUCX-5460-L	43	\$ 872.55	\$ 913.92	\$1056.87	\$1087.63	\$1234.96	\$ 922.46	\$ 963.83	\$1106.78	\$1137.54	\$1284.87
		66"(1676mm)	WUCX-5466-L	43	1007.99	1052.11	1197.42	1228.18	1383.34	1058.43	1102.55	1247.86	1278.62	1433.78
		72"(1829mm)	WUCX-5472-L	43	1075.94	1122.81	1270.48	1301.24	1464.23	1126.91	1173.78	1321.45	1352.21	1515.20
24"(610mm)/ 30"(762mm)	54"(1372mm)	60"(1524mm)	WUCX-5460-L	45	\$ 900.69	\$ 942.06	\$1085.01	\$1115.77	\$1263.10	\$ 952.84	\$ 994.21	\$1137.16	\$1167.92	\$1315.25
		66"(1676mm)	WUCX-5466-L	45	1036.13	1080.25	1225.56	1256.32	1411.48	1088.81	1132.93	1278.24	1309.00	1464.16
		72"(1829mm)	WUCX-5472-L	45	1104.08	1150.95	1298.62	1329.38	1492.37	1157.29	1204.16	1351.83	1382.59	1545.58
		60"(1524mm)	WUCX-5460-L	54	\$ 900.69	\$ 942.06	\$1085.01	\$1115.77	\$1263.10	\$ 952.84	\$ 994.21	\$1137.16	\$1167.92	\$1315.25
30"(762mm)/ 24"(610mm)	54"(1372mm)	66"(1676mm)	WUCX-5466-L	54	1036.13	1080.25	1225.56	1256.32	1411.48	1088.81	1132.93	1278.24	1309.00	1464.16
		72"(1829mm)	WUCX-5472-L	54	1104.08	1150.95	1298.62	1329.38	1492.37	1157.29	1204.16	1351.83	1382.59	1545.58
		66"(1676mm)	WUCX-6066-L	34	\$1033.51	\$1080.38	\$1228.05	\$1258.81	\$1421.80	\$1084.48	\$1131.35	\$1279.02	\$1309.78	\$1472.77
18"(457mm)/ 24"(610mm)	60"(1524mm)	72"(1829mm)	WUCX-6072-L	34	1101.46	1151.08	1301.11	1331.87	1502.69	1152.96	1202.58	1352.61	1383.37	1554.19
		66"(1676mm)	WUCX-6066-L	43	\$1033.51	\$1080.38	\$1228.05	\$1258.81	\$1421.80	\$1084.48	\$1131.35	\$1279.02	\$1309.78	\$1472.77
24"(610mm)/ 18"(457mm)	60"(1524mm)	72"(1829mm)	WUCX-6072-L	43	1101.46	1151.08	1301.11	1331.87	1502.69	1152.96	1202.58	1352.61	1383.37	1554.19
		66"(1676mm)	WUCX-6066-L	45	\$1061.65	\$1108.52	\$1256.19	\$1286.95	\$1449.94	\$1114.86	\$1161.73	\$1309.40	\$1340.16	\$1503.15
24"(610mm)/ 30"(762mm)	60"(1524mm)	72"(1829mm)	WUCX-6072-L	45	1129.60	1179.22	1329.25	1360.01	1530.83	1183.34	1232.96	1382.99	1413.75	1584.57
		66"(1676mm)	WUCX-6066-L	54	\$1061.65	\$1108.52	\$1256.19	\$1286.95	\$1449.94	\$1114.86	\$1161.73	\$1309.40	\$1340.16	\$1503.15
30"(762mm)/ 24"(610mm)	60"(1524mm)	72"(1829mm)	WUCX-6072-L	54	1129.60	1179.22	1329.25	1360.01	1530.83	1183.34	1232.96	1382.99	1413.75	1584.57

Adaptable Worksurfaces — Laminate

90° Merger

Left/Right Depth	Width	Number	①②③	Laminate A			Laminate B		
				T	J	F	T	J	F
18"(457mm)	36"(914mm)	WUCQ-3636-L	N33	\$453.38	\$460.51	\$ 642.81	\$484.10	\$491.23	\$ 673.53
	42"(1067mm)	WUCQ-4242-L	N33	501.36	508.49	713.18	532.08	539.21	743.90
	48"(1219mm)	WUCQ-4848-L	N33	601.85	614.02	845.36	632.57	644.74	876.08
	54"(1372mm)	WUCQ-5454-L	N33	688.97	720.62	986.07	719.69	751.34	1016.79
24"(610mm)	36"(914mm)	WUCQ-3636-L	N44	\$472.57	\$479.70	\$ 662.00	\$503.29	\$510.42	\$ 692.72
	42"(1067mm)	WUCQ-4242-L	N44	520.55	527.68	732.37	551.27	558.40	763.09
	48"(1219mm)	WUCQ-4848-L	N44	621.04	633.21	864.55	651.76	663.93	895.27
	54"(1372mm)	WUCQ-5454-L	N44	708.16	739.81	1005.26	738.88	770.53	1035.98
30"(762mm)	36"(914mm)	WUCQ-3636-L	N55	\$553.58	\$560.71	\$ 743.01	\$584.30	\$591.43	\$ 773.73
	42"(1067mm)	WUCQ-4242-L	N55	601.56	608.69	813.38	632.28	639.41	844.10
	48"(1219mm)	WUCQ-4848-L	N55	702.05	714.22	945.56	732.77	744.94	976.28
	54"(1372mm)	WUCQ-5454-L	N55	789.17	820.82	1086.27	819.89	851.54	1116.99



WUCQ-N44

Features

- Includes worksurface.
- Laminate with:
 - Full perimeter T-mold (T), or
 - 3mm edgeband (J) or knife edge (F) on user edge and 1mm edgeband on sides and back.
- Worksurfaces predrilled to accept most support options.
- Optional wireways along back edges are color-matched to solid side/back edge trim. When wood grain laminate is specified, wireways will be Charcoal. Refer to Specification Guide for wireway details.
- Installed worksurfaces without wireway will not allow clearance for power plug.**
- Depths and widths shown in nominal dimensions.
- Available on RUSH with Standard Core.

Specification Tips

- 90° Merger is suggested alternative to using two perpendicular rectangular worksurfaces.
- Corner bracket is required and must be separately specified.**
- Worksurface support specific to product line and worksurface edge guidelines; must be separately specified; refer to Specification Guide for support and load.**
 - Corner bracket - REQUIRED
 - Cantilever bracket
 - Worksurface support panel
 - Side brackets
- Knife edge requires use of worksurface supports for that application; worksurface support panel and/or side brackets for use with knife edge.
- Mini cantilever brackets are for use with 18"(457mm) deep worksurfaces with knife edge only.
- Not designed for use with an adjustable keyboard pad.**
- Due to manufacturing restrictions, not available with Cascade edge.**

To Order, Specify:

- Product number.
- Laminate surface color.
- Edge trim color.

① Edge Options:

- T** T-Mold
- J** Edgeband
- F** Knife

② Core Options:

- S** Standard
- G** Green, add \$109.26 list.


③ Wireway Options:

- A** Notched
- B** Curved
- C** Without

Adaptable Worksurfaces — Laminate

Corner, 120° Wrap-Around

Left/Right Depth	Width	Number	①②③	Laminate A					Laminate B				
				T	J	V1	V2	F	T	J	V1	V2	F
18"(457mm)	36"(914mm)	WUCZ-3636-L	N33	\$ 578.62	\$ 593.66	\$ 700.62	\$ 731.24	\$ 823.33	\$ 620.99	\$ 636.03	\$ 742.99	\$ 773.61	\$ 865.70
	42"(1067mm)	WUCZ-4242-L	N33	666.76	682.88	800.82	831.44	940.09	715.52	731.64	849.58	880.20	988.85
	48"(1219mm)	WUCZ-4848-L	N33	754.90	772.10	901.02	931.64	1056.85	810.05	827.25	956.17	986.79	1112.00
	54"(1372mm)	WUCZ-5454-L	N33	843.04	861.32	1001.22	1031.84	1173.61	904.58	922.86	1062.76	1093.38	1235.15
	60"(1524mm)	WUCZ-6060-L	N33	931.18	950.54	1101.42	1132.04	1290.37	999.11	1018.47	1169.35	1199.97	1358.30
24"(610mm)	36"(914mm)	WUCZ-3636-L	N44	\$ 662.76	\$ 677.80	\$ 784.76	\$ 815.38	\$ 907.47	\$ 711.85	\$ 726.89	\$ 833.85	\$ 864.47	\$ 956.56
	42"(1067mm)	WUCZ-4242-L	N44	750.90	767.02	884.96	915.58	1024.23	806.38	822.50	940.44	971.06	1079.71
	48"(1219mm)	WUCZ-4848-L	N44	839.04	856.24	985.16	1015.78	1140.99	900.91	918.11	1047.03	1077.65	1202.86
	54"(1372mm)	WUCZ-5454-L	N44	927.18	945.46	1085.36	1115.98	1257.75	995.44	1013.72	1153.62	1184.24	1326.01
	60"(1524mm)	WUCZ-6060-L	N44	1015.32	1034.68	1185.56	1216.18	1374.51	1089.97	1109.33	1260.21	1290.83	1449.16
30"(762mm)	36"(914mm)	WUCZ-3636-L	N55	\$ 746.90	\$ 761.94	\$ 868.90	\$ 899.52	\$ 991.61	\$ 802.71	\$ 817.75	\$ 924.71	\$ 955.33	\$1047.42
	42"(1067mm)	WUCZ-4242-L	N55	835.04	851.16	969.10	999.72	1108.37	897.24	913.36	1031.30	1061.92	1170.57
	48"(1219mm)	WUCZ-4848-L	N55	923.18	940.38	1069.30	1099.92	1225.13	991.77	1008.97	1137.89	1168.51	1293.72
	54"(1372mm)	WUCZ-5454-L	N55	1011.32	1029.60	1169.50	1200.12	1341.89	1086.30	1104.58	1244.48	1275.10	1416.87
	60"(1524mm)	WUCZ-6060-L	N55	1099.46	1118.82	1269.70	1300.32	1458.65	1180.83	1200.19	1351.07	1381.69	1540.02



WUCZ-N44

Features

- Includes worksurface and tie plate.
- Laminate with:
 - Full perimeter T-mold (T), or
 - 3mm edgeband (J) or knife edge (F) on user edge and 1mm edgeband on sides and back, or
 - Cascade (V) on user edge and 1mm edgeband on sides and back.
- Worksurfaces predrilled to accept most support options.
- Optional wireway along back edges of worksurface is color-matched to solid side/back edge trim. When wood grain edge trim is specified, wireway will be Charcoal. Refer to Specification Guide for wireway details.
- Installed worksurfaces without wireway will not allow clearance for power plug.**
- Depths and widths shown in nominal dimensions.
- Available on RUSH with Standard Core.

Specification Tips

- Corner bracket is required and must be separately specified.**
- Worksurface support specific to product line and worksurface edge guidelines; must be separately specified; refer to Specification Guide for support and load.**
 - Corner bracket - REQUIRED
 - Cantilever bracket
 - Worksurface support panel
 - Side brackets
- Knife edge requires use of worksurface supports for that application; worksurface support panel and/or side brackets for use with knife edge.
- Mini cantilever brackets are for use with 18"(457mm) deep worksurfaces with knife edge only.
- Recommend the KU4A-0023- N or KU3A-0023- keyboard pad for 36"(914mm)-wide corners.

Note: Separately specified worksurface reinforcement channels provide additional support for worksurfaces with 50"(1270mm) spans that are heavily loaded and not otherwise supported by mid-span cantilevers, worksurface support panels, columns, legs or attached lower storage.

To Order, Specify:

T-Mold, Edgeband, or Knife

- Product number.
- Laminate surface color.
- Edge trim color for T, J and F.

Cascade

- Product number.
- Laminate surface color.
- Side/back edgeband trim color.
- Front Cascade edge trim color for V1 and V2.

Note: Cascade translucent edge is priced as V2.

① Edge Options:

- T** T-Mold
- J** Edgeband
- V** Cascade
- F** Knife

② Core Options:

- S** Standard
- G** Green, add \$109.26 list.




③ Wireway Options:

- A** Notched
- B** Curved
- C** Without

Adaptable Worksurfaces — Laminate

D-Shaped Convergent

Width	Length	Number	①②③	Laminate A					Laminate B				
				T	J	V1	V2	F	T	J	V1	V2	F
24"(610mm)	36"(914mm)	WURD-2436-L	■	\$295.02	\$297.13	\$346.32	\$376.48	\$422.24	\$314.78	\$316.89	\$366.08	\$396.24	\$442.00
	42"(1067mm)	WURD-2442-L	■	338.48	340.74	393.18	423.34	477.80	361.36	363.62	416.06	446.22	500.68
	48"(1219mm)	WURD-2448-L	■	383.34	385.81	442.80	472.96	539.60	409.86	412.33	469.32	499.48	566.12
	54"(1372mm)	WURD-2454-L	■	426.80	429.42	489.66	519.82	595.16	455.92	458.54	518.78	548.94	624.28
	60"(1524mm)	WURD-2460-L	■	471.66	474.49	539.28	569.44	656.96	504.42	507.25	572.04	602.20	689.72
	66"(1676mm)	WURD-2466-L	■	515.82	518.83	587.52	617.68	715.64	551.70	554.71	623.40	653.56	751.52
	72"(1829mm)	WURD-2472-L	■	559.28	562.44	634.38	664.54	771.20	597.76	600.92	672.86	703.02	809.68
30"(762mm)	36"(914mm)	WURD-3036-L	■	\$398.66	\$401.13	\$469.27	\$499.43	\$559.52	\$418.42	\$420.89	\$489.03	\$519.19	\$579.28
	42"(1067mm)	WURD-3042-L	■	440.20	442.82	514.21	544.37	613.16	463.08	465.70	537.09	567.25	636.04
	48"(1219mm)	WURD-3048-L	■	483.14	485.97	561.91	592.07	673.04	509.66	512.49	588.43	618.59	699.56
	54"(1372mm)	WURD-3054-L	■	524.68	527.66	606.85	637.01	726.68	553.80	556.78	635.97	666.13	755.80
	60"(1524mm)	WURD-3060-L	■	567.62	570.81	654.55	684.71	786.56	600.38	603.57	687.31	717.47	819.32
	66"(1676mm)	WURD-3066-L	■	609.86	613.23	700.87	731.03	843.32	645.74	649.11	736.75	766.91	879.20
	72"(1829mm)	WURD-3072-L	■	651.40	654.92	745.81	775.97	896.96	689.88	693.40	784.29	814.45	935.44
36"(914mm)	36"(914mm)	WURD-3636-L	■	\$409.98	\$410.49	\$480.73	\$510.89	\$572.00	\$429.74	\$430.25	\$500.49	\$530.65	\$591.76
	42"(1067mm)	WURD-3642-L	■	453.44	454.10	527.59	557.75	627.56	476.32	476.98	550.47	580.63	650.44
	48"(1219mm)	WURD-3648-L	■	498.30	499.17	577.21	607.37	689.36	524.82	525.69	603.73	633.89	715.88
	54"(1372mm)	WURD-3654-L	■	541.76	542.78	624.07	654.23	744.92	570.88	571.90	653.19	683.35	774.04
	60"(1524mm)	WURD-3660-L	■	586.62	587.85	673.69	703.85	806.72	619.38	620.61	706.45	736.61	839.48
	66"(1676mm)	WURD-3666-L	■	630.78	632.19	721.93	752.09	865.40	666.66	668.07	757.81	787.97	901.28
	72"(1829mm)	WURD-3672-L	■	674.24	675.80	768.79	798.95	920.96	712.72	714.28	807.27	837.43	959.44



WURD

Features

- Includes worksurface and tie plate.
- Laminate with:
 - Full perimeter T-mold (T), or
 - 3mm edgeband (J) or knife edge (F) on user edge and 1mm edgeband on back (width), or
 - Cascade (V) on user edge and 1mm edgeband on back (width).
- Worksurfaces predrilled to accept most support options.
- Optional wireway is centered on back edge and is color-matched to solid side/back edge trim. When wood grain edge trim is specified, wireway will be Charcoal. Refer to Specification Guide for wireway details.
- Installed worksurfaces without wireway will not allow clearance for power plug.**
- Must be attached to a panel or face of a straight worksurface.**
- Depths and widths shown in nominal dimensions.
- Available on RUSH with Standard Core.

Specification Tips

- Worksurface support specific to product line and worksurface edge guidelines; must be separately specified; refer to Specification Guide for support and load.**
 - Worksurface support post or column
 - Attached lower storage
- In addition to the required floor support, separately specify the appropriate support options. Select one or more of the following:
 - Standard bracket
 - Worksurface support panel
 - Flush mount plates
- Knife edge requires use of worksurface supports for that application; worksurface support panel and/or side brackets for use with knife edge.
- For aesthetic reasons, when using Cascade edge or edgeband edge option, consider specifying D-Shaped Convergent Wrap-Around.

Note: Separately specified worksurface reinforcement channels provide additional support for worksurfaces with 50"(1270mm) spans that are heavily loaded and not otherwise supported by mid-span cantilevers, worksurface support panels, columns, legs or attached lower storage.

To Order, Specify:**T-Mold, Edgeband, or Knife**

- Product number.
- Laminate surface color.
- Edge trim color for T, J and F.

Cascade

- Product number.
- Laminate surface color.
- Side/back edgeband trim color.
- Front Cascade edge trim color for V1 and V2.

Note: Cascade translucent edge is priced as V2.

① Edge Options:

- T** T-Mold
- J** Edgeband
- V** Cascade
- F** Knife

② Core Options:

- S** Standard ■
- G** Green, add \$109.26 list.




③ Wireway Options:

- A** Notched
- B** Curved
- C** Without

Adaptable Worksurfaces — Laminate

Rectangular Convergent

Width	Length	Number	①②③	Laminate A					Laminate B				
				T	J	V1	V2	F	T	J	V1	V2	F
24"(610mm)	36"(914mm)	WURV-2436-L	■	\$271.95	\$276.33	\$325.18	\$355.34	\$401.34	\$291.71	\$296.09	\$344.94	\$375.10	\$421.10
	42"(1067mm)	WURV-2442-L	■	315.06	319.94	375.34	405.50	456.40	337.94	342.82	398.22	428.38	479.28
	48"(1219mm)	WURV-2448-L	■	359.43	365.01	429.58	459.74	517.50	385.95	391.53	456.10	486.26	544.02
	54"(1372mm)	WURV-2454-L	■	402.54	408.62	479.74	509.90	572.56	431.66	437.74	508.86	539.02	601.68
	60"(1524mm)	WURV-2460-L	■	446.91	453.69	533.98	564.14	633.66	479.67	486.45	566.74	596.90	666.42
	66"(1676mm)	WURV-2466-L	■	490.65	498.03	586.18	616.34	691.74	526.53	533.91	622.06	652.22	727.62
	72"(1829mm)	WURV-2472-L	■	533.76	541.64	636.34	666.50	746.80	572.24	580.12	674.82	704.98	785.28
30"(762mm)	36"(914mm)	WURV-3036-L	■	\$364.29	\$369.93	\$435.73	\$465.89	\$528.22	\$384.05	\$389.69	\$455.49	\$485.65	\$547.98
	42"(1067mm)	WURV-3042-L	■	405.48	411.62	483.97	514.13	581.36	428.36	434.50	506.85	537.01	604.24
	48"(1219mm)	WURV-3048-L	■	447.93	454.77	536.29	566.45	640.54	474.45	481.29	562.81	592.97	667.06
	54"(1372mm)	WURV-3054-L	■	489.12	496.46	584.53	614.69	693.68	518.24	525.58	613.65	643.81	722.80
	60"(1524mm)	WURV-3060-L	■	531.57	539.61	636.85	667.01	752.86	564.33	572.37	669.61	699.77	785.62
	66"(1676mm)	WURV-3066-L	■	573.39	582.03	687.13	717.29	809.02	609.27	617.91	723.01	753.17	844.90
	72"(1829mm)	WURV-3072-L	■	614.58	623.72	735.37	765.53	862.16	653.06	662.20	773.85	804.01	900.64
36"(914mm)	36"(914mm)	WURV-3636-L	■	\$373.41	\$379.29	\$448.19	\$478.35	\$540.70	\$393.17	\$399.05	\$467.95	\$498.11	\$560.46
	42"(1067mm)	WURV-3642-L	■	416.52	422.90	498.35	528.51	595.76	439.40	445.78	521.23	551.39	618.64
	48"(1219mm)	WURV-3648-L	■	460.89	467.97	552.59	582.75	656.86	487.41	494.49	579.11	609.27	683.38
	54"(1372mm)	WURV-3654-L	■	504.00	511.58	602.75	632.91	711.92	533.12	540.70	631.87	662.03	741.04
	60"(1524mm)	WURV-3660-L	■	548.37	556.65	656.99	687.15	773.02	581.13	589.41	689.75	719.91	805.78
	66"(1676mm)	WURV-3666-L	■	592.11	600.99	709.19	739.35	831.10	627.99	636.87	745.07	775.23	866.98
	72"(1829mm)	WURV-3672-L	■	635.22	644.60	759.35	789.51	886.16	673.70	683.08	797.83	827.99	924.64



WURV

Features

- Includes work surface and tie plate.
- Laminate with:
 - Full perimeter T-mold (T), or
 - 3mm edgeband (J) or knife edge (F) on user edges and 1mm edgeband on front and back (width), or
 - Cascade (V) on user edges and 1mm edgeband on front and back (width).
- Worksurfaces predrilled to accept most support options.
- Optional wireway along back edge of work surface is color-matched to solid side/back edge trim. When wood grain edge trim is specified, wireway will be Charcoal. Refer to Specification Guide for wireway details.
- Installed worksurfaces without wireway will not allow clearance for power plug.**
- Must be attached to a panel or face of a straight work surface.
- Depths and widths shown in nominal dimensions.
- Available on RUSH with Standard Core.

Specification Tips

- Work surface support specific to product line and work surface edge guidelines; must be separately specified; refer to Specification Guide for support and load.**
 - Work surface support post or column
 - Attached lower storage
- In addition to the required floor support, separately specify the appropriate support options. Select one or more of the following:
 - Cantilever bracket
 - Work surface support panel
 - Flush mount plates
- Knife edge requires use of work surface supports for that application; work surface support panel and/or side brackets for use with knife edge.
- For aesthetic reasons, when using Cascade edge or edgeband edge option, consider specifying D-Shaped Convergent Wrap-Around.

Note: Separately specified work surface reinforcement channels provide additional support for work surfaces with 50"(1270mm) spans that are heavily loaded and not otherwise supported by mid-span cantilevers, work surface support panels, columns, legs or attached lower storage.

To Order, Specify:

T-Mold, Edgeband, or Knife

- Product number.
- Laminate surface color.
- Edge trim color for T, J and F.

Cascade

- Product number.
- Laminate surface color.
- Side/back edgeband trim color.
- Front Cascade edge trim color for V1 and V2.

Note: Cascade translucent edge is priced as V2.

① Edge Options:

- T** T-Mold
- J** Edgeband
- V** Cascade
- F** Knife

② Core Options:

- S** Standard ■
- G** Green, add \$109.26 list.



③ Wireway Options:

- A** Notched
- B** Curved
- C** Without


This page intentionally blank

Adaptable Worksurfaces — Laminate

D-Shaped Convergent, Wrap-Around



(Right-hand orientation)



(Left-hand orientation)

WUCD

Features

- Includes worksurface and tie plate.
- Laminate with:
 - Full perimeter T-mold (T), or
 - 3mm edgeband (J) or knife edge (F) on user edge and 1mm edgeband on side and back, or
 - Cascade (V) on user edge and 1mm edgeband on side and back.
- Worksurfaces predrilled to accept most support options.
- Optional wireway is centered on back edge and is color-matched to solid side/back edge trim. When wood grain or patterned laminate is specified, wireway will be Charcoal. Refer to Specification Guide for wireway details.
- **Installed worksurfaces without wireway will not allow clearance for power plug.**
- 36”(914mm)-wide surfaces have a 24”(610mm) diameter D-shaped radius.
- 42”(1067mm)- to 60”(1524mm)-wide surfaces have a 30”(762mm) diameter D-shaped radius.
- Depths and widths shown in nominal dimensions.
- Available on RUSH with Standard Core.

Specification Tips

- **Worksurface support specific to product line and worksurface edge guidelines; must be separately specified; refer to Specification Guide for support and load.**
 - Worksurface support post or column
 - 21”(533mm) adjustable height disc base
 - Attached lower storage
- In addition to the required floor support, separately specify the appropriate support options. Select one or more of the following:
 - Cantilever bracket
 - Worksurface support panel
 - Side bracket
- Knife edge requires use of worksurface supports for that application; worksurface support panel and/or side brackets for use with knife edge.
- Mini cantilever brackets are for use with 18”(457mm) deep worksurfaces with knife edge only.
- Recommend the KU4A-0023-■ N or KU3A-0023-■ keyboard pad for 36”(914mm)-wide corners.

Note: Separately specified worksurface reinforcement channels provide additional support for worksurfaces with 50”(1270mm) spans that are heavily loaded and not otherwise supported by mid-span cantilevers, worksurface support panels, columns, legs or attached lower storage.

To Order, Specify:

T-Mold, Edgeband, or Knife

- 1) Product number.
- 2) Laminate surface color.
- 3) Edge trim color.

Cascade

- 1) Product number.
- 2) Laminate surface color.
- 3) Side/back edgeband trim color.
- 4) Edge trim color for T, J and F.
- 5) Front Cascade edge trim color for V1 and V2.

Note: Cascade translucent edge is priced as V2.

1 Edge Options:

- T T-Mold
- J Edgeband
- V Cascade
- F Knife

2 Core Options:

- S Standard ■
- G Green, add \$109.26 list.

3 Wireway Options:

- A Notched
- B Curved
- C Without

4 Orientation (as seated):

- R Right-hand
- L Left-hand

Adaptable Worksurfaces — Laminate



D-Shaped Convergent, Wrap-Around

Depth	Width	Length	Number	①②③④	Laminate A					Laminate B				
					T	J	V1	V2	F	T	J	V1	V2	F
18"(457mm)	36"(914mm)	60"(1524mm)	WUCD-3660-L	3	\$ 865.52	\$ 875.04	\$1035.87	\$1066.93	\$1081.26	\$ 928.40	\$ 937.92	\$1098.75	\$1129.81	\$1144.14
		66"(1676mm)	WUCD-3666-L	3	893.12	903.36	1072.95	1104.01	1121.10	957.98	968.22	1137.81	1168.87	1185.96
		72"(1829mm)	WUCD-3672-L	3	974.28	985.24	1163.59	1194.65	1214.50	1041.12	1052.08	1230.43	1261.49	1281.34
24"(610mm)	36"(914mm)	60"(1524mm)	WUCD-3660-L	4	\$ 890.87	\$ 899.57	\$1060.64	\$1091.70	\$1101.93	\$ 955.33	\$ 964.03	\$1125.10	\$1156.16	\$1166.39
		66"(1676mm)	WUCD-3666-L	4	918.47	927.89	1097.72	1128.78	1141.77	984.91	994.33	1164.16	1195.22	1208.21
		72"(1829mm)	WUCD-3672-L	4	999.63	1009.77	1188.36	1219.42	1235.17	1068.05	1078.19	1256.78	1287.84	1303.59
30"(762mm)	36"(914mm)	60"(1524mm)	WUCD-3660-L	5	\$ 916.22	\$ 924.10	\$1085.41	\$1116.47	\$1122.60	\$ 982.26	\$ 990.14	\$1151.45	\$1182.51	\$1188.64
		66"(1676mm)	WUCD-3666-L	5	943.82	952.42	1122.49	1153.55	1162.44	1011.84	1020.44	1190.51	1221.57	1230.46
		72"(1829mm)	WUCD-3672-L	5	1024.98	1034.30	1213.13	1244.19	1255.84	1094.98	1104.30	1283.13	1314.19	1325.84
18"(457mm)	42"(1067mm)	60"(1524mm)	WUCD-4260-L	3	\$ 918.47	\$ 927.89	\$1097.72	\$1128.78	\$1141.77	\$ 984.91	\$ 994.33	\$1164.16	\$1195.22	\$1208.21
		66"(1676mm)	WUCD-4266-L	3	946.07	956.21	1134.80	1165.86	1181.61	1014.49	1024.63	1203.22	1234.28	1250.03
		72"(1829mm)	WUCD-4272-L	3	973.67	984.53	1171.88	1202.94	1221.45	1044.07	1054.93	1242.28	1273.34	1291.85
24"(610mm)	42"(1067mm)	60"(1524mm)	WUCD-4260-L	4	\$ 943.82	\$ 952.42	\$1122.49	\$1153.55	\$1162.44	\$1011.84	\$1020.44	\$1190.51	\$1221.57	\$1230.46
		66"(1676mm)	WUCD-4266-L	4	971.42	980.74	1159.57	1190.63	1202.28	1041.42	1050.74	1229.57	1260.63	1272.28
		72"(1829mm)	WUCD-4272-L	4	999.02	1009.06	1196.65	1227.71	1242.12	1071.00	1081.04	1268.63	1299.69	1314.10
30"(762mm)	42"(1067mm)	60"(1524mm)	WUCD-4260-L	5	\$ 969.17	\$ 976.95	\$1147.26	\$1178.32	\$1183.11	\$1038.77	\$1046.55	\$1216.86	\$1247.92	\$1252.71
		66"(1676mm)	WUCD-4266-L	5	996.77	1005.27	1184.34	1215.40	1222.95	1068.35	1076.85	1255.92	1286.98	1294.53
		72"(1829mm)	WUCD-4272-L	5	1024.37	1033.59	1221.42	1252.48	1262.79	1097.93	1107.15	1294.98	1326.04	1336.35
18"(457mm)	48"(1219mm)	60"(1524mm)	WUCD-4860-L	3	\$ 946.07	\$ 956.21	\$1134.80	\$1165.86	\$1181.61	\$1014.49	\$1024.63	\$1203.22	\$1234.28	\$1250.03
		66"(1676mm)	WUCD-4866-L	3	973.67	984.53	1171.88	1202.94	1221.45	1044.07	1054.93	1242.28	1273.34	1291.85
		72"(1829mm)	WUCD-4872-L	3	1001.27	1012.85	1208.96	1240.02	1261.29	1073.65	1085.23	1281.34	1312.40	1333.67
24"(610mm)	48"(1219mm)	60"(1524mm)	WUCD-4860-L	4	\$ 971.42	\$ 980.74	\$1159.57	\$1190.63	\$1202.28	\$1041.42	\$1050.74	\$1229.57	\$1260.63	\$1272.28
		66"(1676mm)	WUCD-4866-L	4	999.02	1009.06	1196.65	1227.71	1242.12	1071.00	1081.04	1268.63	1299.69	1314.10
		72"(1829mm)	WUCD-4872-L	4	1026.62	1037.38	1233.73	1264.79	1281.96	1100.58	1111.34	1307.69	1338.75	1355.92
30"(762mm)	48"(1219mm)	60"(1524mm)	WUCD-4860-L	5	\$ 996.77	\$1005.27	\$1184.34	\$1215.40	\$1222.95	\$1068.35	\$1076.85	\$1255.92	\$1286.98	\$1294.53
		66"(1676mm)	WUCD-4866-L	5	1024.37	1033.59	1221.42	1252.48	1262.79	1097.93	1107.15	1294.98	1326.04	1336.35
		72"(1829mm)	WUCD-4872-L	5	1051.97	1061.91	1258.50	1289.56	1302.63	1127.51	1137.45	1334.04	1365.10	1378.17
18"(457mm)	54"(1372mm)	60"(1524mm)	WUCD-5460-L	3	\$ 973.67	\$ 984.53	\$1171.88	\$1202.94	\$1221.45	\$1044.07	\$1054.93	\$1242.28	\$1273.34	\$1291.85
		66"(1676mm)	WUCD-5466-L	3	1001.27	1012.85	1208.96	1240.02	1261.29	1073.65	1085.23	1281.34	1312.40	1333.67
		72"(1829mm)	WUCD-5472-L	3	1028.87	1041.17	1246.04	1277.10	1301.13	1103.23	1115.53	1320.40	1351.46	1375.49
24"(610mm)	54"(1372mm)	60"(1524mm)	WUCD-5460-L	4	\$ 999.02	\$1009.06	\$1196.65	\$1227.71	\$1242.12	\$1071.00	\$1081.04	\$1268.63	\$1299.69	\$1314.10
		66"(1676mm)	WUCD-5466-L	4	1026.62	1037.38	1233.73	1264.79	1281.96	1100.58	1111.34	1307.69	1338.75	1355.92
		72"(1829mm)	WUCD-5472-L	4	1054.22	1065.70	1270.81	1301.87	1321.80	1130.16	1141.64	1346.75	1377.81	1397.74
30"(762mm)	54"(1372mm)	60"(1524mm)	WUCD-5460-L	5	\$1024.37	\$1033.59	\$1221.42	\$1252.48	\$1262.79	\$1097.93	\$1107.15	\$1294.98	\$1326.04	\$1336.35
		66"(1676mm)	WUCD-5466-L	5	1051.97	1061.91	1258.50	1289.56	1302.63	1127.51	1137.45	1334.04	1365.10	1378.17
		72"(1829mm)	WUCD-5472-L	5	1079.57	1090.23	1295.58	1326.64	1342.47	1157.09	1167.75	1373.10	1404.16	1419.99
18"(457mm)	60"(1524mm)	60"(1524mm)	WUCD-6060-L	3	\$1001.27	\$1012.85	\$1208.96	\$1240.02	\$1261.29	\$1073.65	\$1085.23	\$1281.34	\$1312.40	\$1333.67
		66"(1676mm)	WUCD-6066-L	3	1028.87	1041.17	1246.04	1277.10	1301.13	1103.23	1115.53	1320.40	1351.46	1375.49
		72"(1829mm)	WUCD-6072-L	3	1056.47	1069.49	1283.12	1314.18	1340.97	1132.81	1145.83	1359.46	1390.52	1417.31
24"(610mm)	60"(1524mm)	60"(1524mm)	WUCD-6060-L	4	\$1026.62	\$1037.38	\$1233.73	\$1264.79	\$1281.96	\$1100.58	\$1111.34	\$1307.69	\$1338.75	\$1355.92
		66"(1676mm)	WUCD-6066-L	4	1054.22	1065.70	1270.81	1301.87	1321.80	1130.16	1141.64	1346.75	1377.81	1397.74
		72"(1829mm)	WUCD-6072-L	4	1081.82	1094.02	1307.89	1338.95	1361.64	1159.74	1171.94	1385.81	1416.87	1439.56
30"(762mm)	60"(1524mm)	60"(1524mm)	WUCD-6060-L	5	\$1051.97	\$1061.91	\$1258.50	\$1289.56	\$1302.63	\$1127.51	\$1137.45	\$1334.04	\$1365.10	\$1378.17
		66"(1676mm)	WUCD-6066-L	5	1079.57	1090.23	1295.58	1326.64	1342.47	1157.09	1167.75	1373.10	1404.16	1419.99
		72"(1829mm)	WUCD-6072-L	5	1107.17	1118.55	1332.66	1363.72	1382.31	1186.67	1198.05	1412.16	1443.22	1461.81

Adaptable Worksurfaces — Laminate

D-Shaped Ender

Depth	Length	Number	①②	Laminate A					Laminate B				
				T	J	V1	V2	F	T	J	V1	V2	F
18"(457mm)	36"(914mm)	WUDD-1836-L	■ C	\$241.84	\$244.91	\$289.07	\$319.69	\$357.86	\$259.79	\$262.86	\$307.02	\$337.64	\$375.81
	42"(1067mm)	WUDD-1842-L	■ C	275.98	280.37	327.05	357.67	405.98	296.87	301.26	347.94	378.56	426.87
	48"(1219mm)	WUDD-1848-L	■ C	310.12	315.83	365.03	395.65	454.10	333.95	339.66	388.86	419.48	477.93
	54"(1372mm)	WUDD-1854-L	■ C	344.26	351.29	403.01	433.63	502.22	371.03	378.06	429.78	460.40	528.99
	60"(1524mm)	WUDD-1860-L	■ C	378.40	386.75	440.99	471.61	550.34	408.11	416.46	470.70	501.32	580.05
	66"(1676mm)	WUDD-1866-L	■ C	412.54	422.21	478.97	509.59	598.46	445.19	454.86	511.62	542.24	631.11
	72"(1829mm)	WUDD-1872-L	■ C	446.68	457.67	516.95	547.57	646.58	482.27	493.26	552.54	583.16	682.17
24"(610mm)	36"(914mm)	WUDD-2436-L	■ C	\$275.41	\$279.76	\$329.67	\$360.29	\$404.32	\$293.36	\$297.71	\$347.62	\$378.24	\$422.27
	42"(1067mm)	WUDD-2442-L	■ C	319.09	324.76	377.19	407.81	461.98	339.98	345.65	398.08	428.70	482.87
	48"(1219mm)	WUDD-2448-L	■ C	362.77	369.76	424.71	455.33	519.64	386.60	393.59	448.54	479.16	543.47
	54"(1372mm)	WUDD-2454-L	■ C	406.45	414.76	472.23	502.85	577.30	433.22	441.53	499.00	529.62	604.07
	60"(1524mm)	WUDD-2460-L	■ C	450.13	459.76	519.75	550.37	634.96	479.84	489.47	549.46	580.08	664.67
	66"(1676mm)	WUDD-2466-L	■ C	493.81	504.76	567.27	597.89	692.62	526.46	537.41	599.92	630.54	725.27
	72"(1829mm)	WUDD-2472-L	■ C	537.49	549.76	614.79	645.41	750.28	573.08	585.35	650.38	681.00	785.87
30"(762mm)	36"(914mm)	WUDD-3036-L	■ C	\$364.49	\$370.52	\$404.52	\$435.14	\$528.86	\$382.44	\$388.47	\$422.47	\$453.09	\$546.81
	42"(1067mm)	WUDD-3042-L	■ C	406.25	413.60	450.12	480.74	584.60	427.14	434.49	471.01	501.63	605.49
	48"(1219mm)	WUDD-3048-L	■ C	448.01	456.68	495.72	526.34	640.34	471.84	480.51	519.55	550.17	664.17
	54"(1372mm)	WUDD-3054-L	■ C	489.77	499.76	541.32	571.94	696.08	516.54	526.53	568.09	598.71	722.85
	60"(1524mm)	WUDD-3060-L	■ C	531.53	542.84	586.92	617.54	751.82	561.24	572.55	616.63	647.25	781.53
	66"(1676mm)	WUDD-3066-L	■ C	573.29	585.92	632.52	663.14	807.56	605.94	618.57	665.17	695.79	840.21
	72"(1829mm)	WUDD-3072-L	■ C	615.05	629.00	678.12	708.74	863.30	650.64	664.59	713.71	744.33	898.89



Features

- Includes worksurface and tie plate.
- Laminate with:
 - Full perimeter T-mold (T), or
 - 3mm edgeband (J) or knife edge (F) on user edge and 1mm edgeband on back (width), or
 - Cascade (V) on user edge and 1mm edgeband on back (width).
- Worksurfaces predrilled to accept most support options.
- Must be attached to the depth of adjoining worksurface.**
- Depths and widths shown in nominal dimensions.
- Available on RUSH with Standard Core.

Specification Tips

- Worksurface support specific to product line and worksurface edge guidelines; must be separately specified; refer to Specification Guide for support and load.**
 - Worksurface support post or column
 - 21"(533mm) adjustable height disc base
 - Attached lower storage
- In addition to the required floor support, separately specify the appropriate support options. Select one or more of the following:
 - Shared cantilever bracket
 - Worksurface support panel
 - Flush mount plate
- For aesthetic reasons, when using Cascade edge option, consider specifying D-Shaped Convergent Wrap-Around.

Note: Separately specified worksurface reinforcement channels provide additional support for worksurfaces with 50"(1270mm) spans that are heavily loaded and not otherwise supported by mid-span cantilevers, worksurface support panels, columns, legs or attached lower storage.

To Order, Specify:

T-Mold, Edgeband, or Knife

- Product number.
- Laminate surface color.
- Edge trim color for T, J and F.

Cascade

- Product number.
- Laminate surface color.
- Side/back edgeband trim color.
- Front Cascade edge trim color for V1 and V2.

Note: Cascade translucent edge is priced as V2.

① Edge Options:

- T** T-Mold
- J** Edgeband
- V** Cascade
- F** Knife


② Core Options:

- S** Standard ■
- G** Green, add \$109.26 list.

Adaptable Worksurfaces — Laminate


Bent

Left/Right Depth	Width	Length	Number	①②③	Laminate A					Laminate B				
					T	J	V1	V2	F	T	J	V1	V2	F
24"(610mm)/ 30"(762mm)	24"(610mm)	36"(914mm)	WUCB-2436-L	R45	\$ 645.01	\$ 654.52	\$ 764.73	\$ 795.65	\$ 901.83	\$ 691.91	\$ 701.42	\$ 811.63	\$ 842.55	\$ 948.73
		42"(1067mm)	WUCB-2442-L	R45	727.30	737.94	863.45	894.37	1012.32	780.18	790.82	916.33	947.25	1065.20
		48"(1219mm)	WUCB-2448-L	R45	862.89	874.66	1015.47	1046.39	1176.11	921.75	933.52	1074.33	1105.25	1234.97
		60"(1524mm)	WUCB-2460-L	R45	974.17	988.20	1159.61	1190.53	1343.79	1044.99	1059.02	1230.43	1261.35	1414.61
		30"(762mm)	WUCB-3036-L	R45	\$ 727.30	\$ 737.94	\$ 863.45	\$ 894.37	\$ 1012.32	\$ 780.18	\$ 790.82	\$ 916.33	\$ 947.25	\$ 1065.20
24"(610mm)/ 30"(762mm)	30"(762mm)	36"(914mm)	WUCB-3036-L	R45	\$ 727.30	\$ 737.94	\$ 863.45	\$ 894.37	\$ 1012.32	\$ 780.18	\$ 790.82	\$ 916.33	\$ 947.25	\$ 1065.20
		42"(1067mm)	WUCB-3042-L	R45	809.59	821.36	962.17	993.09	1122.81	868.45	880.22	1021.03	1051.95	1181.67
		48"(1219mm)	WUCB-3048-L	R45	945.18	958.08	1114.19	1145.11	1286.60	1010.02	1022.92	1179.03	1209.95	1351.44
		60"(1524mm)	WUCB-3060-L	R45	1056.46	1071.62	1258.33	1289.25	1454.28	1133.26	1148.42	1335.13	1366.05	1531.08
		24"(610mm)	WUCB-2436-L	L54	\$ 645.01	\$ 654.52	\$ 764.73	\$ 795.65	\$ 901.83	\$ 691.91	\$ 701.42	\$ 811.63	\$ 842.55	\$ 948.73
30"(762mm)/ 24"(610mm)	24"(610mm)	36"(914mm)	WUCB-2436-L	L54	\$ 645.01	\$ 654.52	\$ 764.73	\$ 795.65	\$ 901.83	\$ 691.91	\$ 701.42	\$ 811.63	\$ 842.55	\$ 948.73
		42"(1067mm)	WUCB-2442-L	L54	727.30	737.94	863.45	894.37	1012.32	780.18	790.82	916.33	947.25	1065.20
		48"(1219mm)	WUCB-2448-L	L54	862.89	874.66	1015.47	1046.39	1176.11	921.75	933.52	1074.33	1105.25	1234.97
		60"(1524mm)	WUCB-2460-L	L54	974.17	988.20	1159.61	1190.53	1343.79	1044.99	1059.02	1230.43	1261.35	1414.61
		30"(762mm)	WUCB-3036-L	L54	\$ 727.30	\$ 737.94	\$ 863.45	\$ 894.37	\$ 1012.32	\$ 780.18	\$ 790.82	\$ 916.33	\$ 947.25	\$ 1065.20
30"(762mm)/ 24"(610mm)	30"(762mm)	36"(914mm)	WUCB-3036-L	L54	\$ 727.30	\$ 737.94	\$ 863.45	\$ 894.37	\$ 1012.32	\$ 780.18	\$ 790.82	\$ 916.33	\$ 947.25	\$ 1065.20
		42"(1067mm)	WUCB-3042-L	L54	809.59	821.36	962.17	993.09	1122.81	868.45	880.22	1021.03	1051.95	1181.67
		48"(1219mm)	WUCB-3048-L	L54	945.18	958.08	1114.19	1145.11	1286.60	1010.02	1022.92	1179.03	1209.95	1351.44
		60"(1524mm)	WUCB-3060-L	L54	1056.46	1071.62	1258.33	1289.25	1454.28	1133.26	1148.42	1335.13	1366.05	1531.08
		24"(610mm)	WUCB-2436-L	L54	\$ 645.01	\$ 654.52	\$ 764.73	\$ 795.65	\$ 901.83	\$ 691.91	\$ 701.42	\$ 811.63	\$ 842.55	\$ 948.73



(Right-hand orientation)

WUCB-R45



(Left-hand orientation)

WUCB-L54

Features

- Includes worksurface and tie plate.
- Laminate with:
 - Full perimeter T-mold (T), or
 - 3mm edgeband (J) or knife edge (F) on user edge and 1mm edgeband on back (width), or
 - Cascade (V) on user edge and 1mm edgeband on back (width).
- Worksurfaces predrilled to accept most support options.
- Optional wireway along back edge is color-matched to solid side/back edge trim. When wood grain laminate is specified, wireways will be Charcoal. Refer to Specification Guide for wireway details.
- Installed worksurfaces without wireway will not allow clearance for power plug.**
- Depths and widths shown in nominal dimensions.
- Available on RUSH with Standard Core.

Specification Tips

- Corner bracket is required and must be separately specified.**
- Worksurface support specific to product line and worksurface edge guidelines; must be separately specified; refer to Specification Guide for support and load.**
 - Corner bracket - REQUIRED
 - Cantilever bracket
 - Worksurface support column or leg
- In addition to the required floor support, separately specify the appropriate support options. Select one or more of the following:
 - Shared cantilever bracket
 - Worksurface support panel
- Knife edge requires use of worksurface supports for that application; worksurface support panel and/or side brackets for use with knife edge.

Note: Separately specified worksurface reinforcement channels provide additional support for worksurfaces with 50"(1270mm) spans that are heavily loaded and not otherwise supported by mid-span cantilevers, worksurface end panels, legs or attached storage.

To Order, Specify:

T-Mold, Edgeband, or Knife

- Product number.
- Laminate surface color.
- Edge trim color for T, J and F.

Cascade

- Product number.
- Laminate surface color.
- Side/back edgeband trim color.
- Front Cascade edge trim color for V1 and V2.

Note: Cascade translucent edge is priced as V2.

① Edge Options:

- T** T-Mold
- J** Edgeband
- V** Cascade
- F** Knife

② Core Options:


- S** Standard
- G** Green, add \$109.26 list.

③ Wireway Options:

- A** Notched
- B** Curved
- C** Without

Adaptable Worksurfaces — Laminate

Countertop



WUTS

Features

- Includes countertop and tie plate.
- Laminate with:
 - Full perimeter T-mold (T), or
 - 3mm edgeband (J) or knife edge (F) on user edge and 1mm edgeband on ends, or
 - Cascade (V) on user edges and 1mm edgeband on ends.
- Depths and widths shown in nominal dimensions.

◆ Available on RUSH with Standard Core.

Specification Tips

- **Requires separately specified mounting hardware.**
- For installation on panels 42”(1067mm)-high or higher.
- Widths are 1”(25mm) or 3”(76mm) less than panel widths or panel width combinations are for use with variable height covers. See Specification Guide for details.
- Countertop support specific to product line; must be separately specified.
- Knife edge countertop not for use with PREMISE Monolithic Panel.

To Order, Specify:

T-Mold, Edgeband, or Knife

- 1) Product number.
- 2) Laminate surface color.
- 3) Edge trim color for T, J and F.

Cascade

- 1) Product number.
- 2) Laminate surface color.
- 3) Side/back edgeband trim color.
- 4) Front Cascade edge trim color for V1 and V2.

Note: Cascade translucent edge is priced as V2.

① Edge Options:

- T** T-Mold
- J** Edgeband
- V** Cascade
- F** Knife

② Core Options:

- S** Standard ◆
- G** Green, add **\$109.26** list.

Adaptable Worksurfaces — Laminate


Countertop

Depth	Width	Number	①②	Laminate A					Laminate B				
				T	J	V1	V2	F	T	J	V1	V2	F
12"(305mm)	21"(533mm)	WUTS-1221-L	C	\$305.28	\$308.66	\$358.71	\$389.17	\$433.36	\$327.94	\$331.32	\$381.37	\$411.83	\$456.02
	23"(584mm)	WUTS-1223-L	C	310.76	314.16	365.07	395.53	440.76	333.82	337.22	388.13	418.59	463.82
	24"(610mm)	WUTS-1224-L	C	313.50	316.91	368.25	398.71	444.46	336.76	340.17	391.51	421.97	467.72
	27"(686mm)	WUTS-1227-L	C	321.72	325.16	377.79	408.25	455.56	345.58	349.02	401.65	432.11	479.42
	29"(737mm)	WUTS-1229-L	C	327.20	330.66	384.15	414.61	462.96	351.46	354.92	408.41	438.87	487.22
	30"(762mm)	WUTS-1230-L	C	329.94	333.41	387.33	417.79	466.66	354.40	357.87	411.79	442.25	491.12
	33"(838mm)	WUTS-1233-L	C	338.16	341.66	396.87	427.33	477.76	363.22	366.72	421.93	452.39	502.82
	35"(889mm)	WUTS-1235-L	C	343.64	347.16	403.23	433.69	485.16	369.10	372.62	428.69	459.15	510.62
	36"(914mm)	WUTS-1236-L	C	346.38	349.91	406.41	436.87	488.86	372.04	375.57	432.07	462.53	514.52
	39"(991mm)	WUTS-1239-L	C	354.60	358.16	415.95	446.41	499.96	380.86	384.42	442.21	472.67	526.22
	41"(1041mm)	WUTS-1241-L	C	360.08	363.66	422.31	452.77	507.36	386.74	390.32	448.97	479.43	534.02
	42"(1067mm)	WUTS-1242-L	C	362.82	366.41	425.49	455.95	511.06	389.68	393.27	452.35	482.81	537.92
	45"(1143mm)	WUTS-1245-L	C	371.04	374.66	435.03	465.49	522.16	398.50	402.12	462.49	492.95	549.62
	47"(1194mm)	WUTS-1247-L	C	376.52	380.16	441.39	471.85	529.56	404.38	408.02	469.25	499.71	557.42
	48"(1219mm)	WUTS-1248-L	C	379.26	382.91	444.57	475.03	533.26	407.32	410.97	472.63	503.09	561.32
	51"(1295mm)	WUTS-1251-L	C	387.48	391.16	454.11	484.57	544.36	416.14	419.82	482.77	513.23	573.02
	53"(1346mm)	WUTS-1253-L	C	392.96	396.66	460.47	490.93	551.76	422.02	425.72	489.53	519.99	580.82
	54"(1372mm)	WUTS-1254-L	C	395.70	399.41	463.65	494.11	555.46	424.96	428.67	492.91	523.37	584.72
	57"(1448mm)	WUTS-1257-L	C	403.92	407.66	473.19	503.65	566.56	433.78	437.52	503.05	533.51	596.42
	59"(1499mm)	WUTS-1259-L	C	409.40	413.16	479.55	510.01	573.96	439.66	443.42	509.81	540.27	604.22
	60"(1524mm)	WUTS-1260-L	C	412.14	415.91	482.73	513.19	577.66	442.60	446.37	513.19	543.65	608.12
	63"(1600mm)	WUTS-1263-L	C	420.36	424.16	492.27	522.73	588.76	451.42	455.22	523.33	553.79	619.82
	65"(1651mm)	WUTS-1265-L	C	425.84	429.66	498.63	529.09	596.16	457.30	461.12	530.09	560.55	627.62
	66"(1676mm)	WUTS-1266-L	C	428.58	432.41	501.81	532.27	599.86	460.24	464.07	533.47	563.93	631.52
	69"(1753mm)	WUTS-1269-L	C	436.80	440.66	511.35	541.81	610.96	469.06	472.92	543.61	574.07	643.22
	71"(1803mm)	WUTS-1271-L	C	442.28	446.16	517.71	548.17	618.36	474.94	478.82	550.37	580.83	651.02
	72"(1829mm)	WUTS-1272-L	C	445.02	448.91	520.89	551.35	622.06	477.88	481.77	553.75	584.21	654.92
	75"(1905mm)	WUTS-1275-L	C	453.24	457.16	530.43	560.89	633.16	486.70	490.62	563.89	594.35	666.62
	77"(1956mm)	WUTS-1277-L	C	458.72	462.66	536.79	567.25	640.56	492.58	496.52	570.65	601.11	674.42
	78"(1981mm)	WUTS-1278-L	C	461.46	465.41	539.97	570.43	644.26	495.52	499.47	574.03	604.49	678.32
	81"(2057mm)	WUTS-1281-L	C	469.68	473.66	549.51	579.97	655.36	504.34	508.32	584.17	614.63	690.02
	83"(2108mm)	WUTS-1283-L	C	475.16	479.16	555.87	586.33	662.76	510.22	514.22	590.93	621.39	697.82
	84"(2134mm)	WUTS-1284-L	C	477.90	481.91	559.05	589.51	666.46	513.16	517.17	594.31	624.77	701.72
	87"(2210mm)	WUTS-1287-L	C	486.12	490.16	568.59	599.05	677.56	521.98	526.02	604.45	634.91	713.42
	89"(2261mm)	WUTS-1289-L	C	491.60	495.66	574.95	605.41	684.96	527.86	531.92	611.21	641.67	721.22
	90"(2286mm)	WUTS-1290-L	C	494.34	498.41	578.13	608.59	688.66	530.80	534.87	614.59	645.05	725.12
	93"(2362mm)	WUTS-1293-L	C	502.56	506.66	587.67	618.13	699.76	539.62	543.72	624.73	655.19	736.82
	95"(2413mm)	WUTS-1295-L	C	508.04	512.16	594.03	624.49	707.16	545.50	549.62	631.49	661.95	744.62
	96"(2438mm)	WUTS-1296-L	C	510.78	514.91	597.21	627.67	710.86	548.44	552.57	634.87	665.33	748.52
	99"(2515mm)	WUTS-1299-L	C	519.00	523.16	606.75	637.21	721.96	557.26	561.42	645.01	675.47	760.22
	101"(2565mm)	WUTS-12A1-L	C	524.48	528.66	613.11	643.57	729.36	563.14	567.32	651.77	682.23	768.02
	102"(2591mm)	WUTS-12A2-L	C	527.22	531.41	616.29	646.75	733.06	566.08	570.27	655.15	685.61	771.92
	105"(2667mm)	WUTS-12A5-L	C	535.44	539.66	625.83	656.29	744.16	574.90	579.12	665.29	695.75	783.62
	107"(2718mm)	WUTS-12A7-L	C	540.92	545.16	632.19	662.65	751.56	580.78	585.02	672.05	702.51	791.42
	108"(2743mm)	WUTS-12A8-L	C	543.66	547.91	635.37	665.83	755.26	583.72	587.97	675.43	705.89	795.32
	111"(2819mm)	WUTS-12B1-L	C	551.88	556.16	644.91	675.37	766.36	592.54	596.82	685.57	716.03	807.02
	113"(2870mm)	WUTS-12B3-L	C	557.36	561.66	651.27	681.73	773.76	598.42	602.72	692.33	722.79	814.82
	114"(2896mm)	WUTS-12B4-L	C	560.10	564.41	654.45	684.91	777.46	601.36	605.67	695.71	726.17	818.72
	117"(2972mm)	WUTS-12B7-L	C	568.32	572.66	663.99	694.45	788.56	610.18	614.52	705.85	736.31	830.42
	119"(3023mm)	WUTS-12B9-L	C	573.80	578.16	670.35	700.81	795.96	616.06	620.42	712.61	743.07	838.22
	120"(3048mm)	WUTS-12C0-L	C	576.54	580.91	673.53	703.99	799.66	619.00	623.37	715.99	746.45	842.12

Adaptable Worksurfaces — Laminate

Conference End

Depth	Width	Number	①②③	Laminate A					Laminate B				
				T	J	V1	V2	F	T	J	V1	V2	F
39"(991mm)	30"(762mm)	WUDC-3930-L		\$560.76	\$602.29	\$690.25	\$721.17	\$820.82	\$602.34	\$643.87	\$731.83	\$762.75	\$862.40
51"(1295mm)		WUDC-5130-L		603.66	631.15	732.50	763.42	860.73	646.15	673.64	774.99	805.91	903.22
63"(1600mm)		WUDC-6330-L		643.26	657.79	771.50	802.42	897.57	686.59	701.12	814.83	845.75	940.90

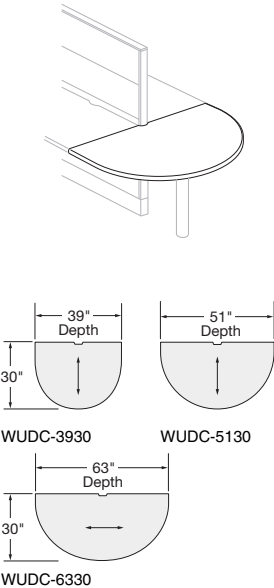

Features

- Includes worksurface and tie plate.
- Laminate with:
 - Full perimeter T-mold (T), or
 - 3mm edgeband (J) or knife edge (F) on user edge and 1mm edgeband on back, or
 - Cascade (V) on user edge and 1mm edgeband on back.
- Worksurfaces predrilled to accept most support options.
- Optional wireway can be specified to accommodate panel end-of-run trim.
- Depths and widths shown in nominal dimensions.
- Available on RUSH with Standard Core.

Specification Tips

- Worksurface support specific to product line and worksurface edge guidelines; must be separately specified; refer to Specification Guide for support and load.
 - Cantilever bracket
 - Side brackets
 - Worksurface support column or leg – REQUIRED.
 - Worksurface support panel
- Knife edge requires use of worksurface supports for that application; worksurface support panel and/or side brackets for use with knife edge.
 - Mini cantilever brackets are for use with 18"(457mm) deep worksurfaces with knife edge only.
- Must be specified with notched or curved wireway to fit around end-of-run trim.

Note: Grain direction will run across 63"(1600mm)-wide conference end worksurface.

To Order, Specify:

T-Mold, Edgeband, or Knife

- Product number.
- Laminate surface color.
- Edge trim color for T, J and F.

Cascade

- Product number.
- Laminate surface color.
- Side/back edgeband trim color.
- Front Cascade edge trim color for V1 and V2.

Note: Cascade translucent edge is priced as V2.

① Edge Options:

- T T-Mold
- J Edgeband
- V Cascade
- F Knife

② Core Options:

- S Standard
- G Green, add \$109.26 list.



③ Wireway Options:

- A Notched
- B Curved



Adaptable Worksurfaces — Laminate

Key Conference End

Depth	Width	Number	①②③	Laminate A					Laminate B				
				T	J	V1	V2	F	T	J	V1	V2	F
39"(991mm)	30"(762mm)	WURY-3930-L	■	\$717.46	\$729.14	\$858.00	\$888.92	\$ 999.90	\$769.70	\$781.38	\$910.24	\$ 941.16	\$1052.14
51"(1295mm)	30"(762mm)	WURY-5130-L	■	\$721.45	\$733.12	\$862.65	\$893.57	\$1005.27	\$773.97	\$785.64	\$915.17	\$ 946.09	\$1057.79
	36"(914mm)	WURY-5136-L	■	737.28	748.88	879.48	910.40	1025.24	790.98	802.58	933.18	964.10	1078.94
63"(1600mm)	36"(914mm)	WURY-6336-L	■	\$741.27	\$752.86	\$884.13	\$915.05	\$1030.61	\$795.25	\$806.84	\$938.11	\$ 969.03	\$1084.59
	42"(1067mm)	WURY-6342-L	■	757.10	768.62	900.96	931.88	1050.58	812.26	823.78	956.12	987.04	1105.74
	48"(1219mm)	WURY-6348-L	■	772.93	784.38	917.79	948.71	1070.55	829.27	840.72	974.13	1005.05	1126.89



WURY-3930-L

WURY-5130
WURY-5136WURY-6336
WURY-6342
WURY-6348

Features

- Includes worksurface and tie plate.
- Laminate with:
 - Full perimeter T-mold (T), or
 - 3mm edgeband (J) or knife edge (F) on user edge and 1mm edgeband on back, or
 - Cascade (V) on user edge and 1mm edgeband on back.
- Worksurfaces predrilled to accept most support options.
- Wireway along back edge is color-matched to solid side/back edge trim. When wood grain laminate is specified, wireway will be Charcoal. Refer to Specification Guide for wireway details.
- Depths and widths shown in nominal dimensions.
- Wireway required to accommodate end-of-run trim.
- Available on RUSH with Standard Core.

Specification Tips

- Worksurface support specific to product line and worksurface edge guidelines; must be separately specified; refer to Specification Guide for support and load.
 - Cantilever bracket
 - Side brackets
 - Worksurface support column or leg – REQUIRED.
 - Worksurface support panel
- Knife edge requires use of worksurface supports for that application; worksurface support panel and/or side brackets for use with knife edge.
 - Mini cantilever brackets are for use with 18"(457mm) deep worksurfaces with knife edge only.
- To be used in conference end application.
- Must be specified with notched or curved wireway to fit around end-of-run trim.

To Order, Specify:

T-Mold, Edgeband, or Knife

- Product number.
- Laminate surface color.
- Edge trim color for T, J and F.

Cascade

- Product number.
- Laminate surface color.
- Side/back edgeband trim color.
- Front Cascade edge trim color for V1 and V2.

Note: Cascade translucent edge is priced as V2.

① Edge Options:

- T** T-Mold
- J** Edgeband
- V** Cascade
- F** Knife

② Core Options:

- S** Standard ■
- G** Green, add \$109.26 list.

③ Wireway Options:

- A** Notched
- B** Curved



NOTE:

Grain direction for laminate
Key End over 63"(1600mm)-
deep will be reversed.

Adaptable Worksurfaces — Laminate

120° Link

Depth	Number	①②	Laminate A					Laminate B				
			T	J	V1	V2	F	T	J	V1	V2	F
18"(457mm)	WUDZ-1821-L	C	\$269.93	\$279.30	\$333.57	\$364.49	\$402.96	\$290.19	\$299.56	\$353.83	\$384.75	\$423.22
24"(610mm)	WUDZ-2427-L	C	299.57	306.34	363.61	394.53	430.00	319.83	326.60	383.87	414.79	450.26
30"(762mm)	WUDZ-3033-L	C	434.69	432.80	504.75	535.67	605.50	466.67	464.78	536.73	567.65	637.48



WUDZ

Features

- Includes worksurface and tie plate.
- Laminate with:
 - Full perimeter T-mold (T), or
 - 3mm edgeband (J) or knife edge (F) on user edge and 1mm edgeband on sides and back, or
 - Cascade (V) on user edge and 1mm edgeband on sides and back.
- Worksurfaces predrilled to accept most support options.
- Depths and widths shown in nominal dimensions.
- Available on RUSH with Standard Core.

Specification Tips

- Support column, leg or worksurface support panel must be used dependent upon application.
- Use with Corner, 120° Wrap-Around worksurfaces.
- Worksurface support specific to product line and worksurface edge guidelines; must be separately specified; refer to Specification Guide for support and load.**
 - Work surface support panel
 - Shared cantilever bracket
- Knife edge requires use of worksurface supports for that application; worksurface support panel and/or side brackets for use with knife edge.
- Mini cantilever brackets are for use with 18"(457mm) deep worksurfaces with knife edge only.

To Order, Specify:

T-Mold, Edgeband, or Knife

- Product number.
- Laminate surface color.
- Edge trim color for T, J and F.

Cascade

- Product number.
- Laminate surface color.
- Side/back edgeband trim color.
- Front Cascade edge trim color for V1 and V2.

Note: Cascade translucent edge is priced as V2.

① Edge Options:

- T** T-Mold
- J** Edgeband
- V** Cascade
- F** Knife


② Core Options:

- S** Standard
- G** Green, add \$109.26 list.

This page intentionally blank

Adaptable Worksurfaces — Wood

Rectangular



WURA-W

Features

- Includes work surface and tie plate.
- Wood veneer work surface with:
 - 3mm edgeband (K) or knife edge (U) on user edge and 1mm edgeband on sides and back, or
 - Cascade (M) on user edge and 1mm edgeband on sides and back.
- Worksurfaces predrilled to accept most support options.
- Optional wireway will be Charcoal. Refer to Specification Guide for wireway details.
- 24”(607mm)- to 60”(1524mm)-wide worksurfaces have one wireway.
- Worksurfaces wider than 60”(1524mm) have two wireways.
- **Installed worksurfaces without wireway will not allow clearance for power plug.**
- Depths and widths shown in nominal dimensions.

Specification Tips

- For additional widths to span a 3-way panel condition, refer to panel-specific work surface section.
- **Work surface support specific to product line and work surface edge guidelines; must be separately specified; refer to Specification Guide for support and load.**
 - Cantilever brackets
 - Side brackets
 - Work surface support panel
 - Support column or support leg
 - Attached lower storage
- Knife edge requires use of work surface supports for that application; work surface support panel and/or side brackets for use with knife edge.
- Mini cantilever brackets are for use with 18”(457mm) deep work surfaces with knife edge only.
- Intermediate support is required for unsupported work surface span greater than 60”(1524mm).

Note: Separately specified work surface reinforcement channels provide additional support for work surfaces with 50”(1270mm) spans that are heavily loaded and not otherwise supported by mid-span cantilevers, work surface support panels, columns, legs or attached lower storage.

To Order, Specify:

- 1) Product number.
- 2) Wood finish color.

1 Edge Options:

- K** Wood Edgeband
- M** Wood Cascade
- U** Wood Knife

2 Core Options:

- S** Standard
- G** Green, add \$109.26 list.

3 Wireway Options:

- A** Notched
- B** Curved
- C** Without

Adaptable Worksurfaces — Wood

Rectangular

Depth	Width	Number	①②③	Wood Group A K	Group B K	Wood Group A M	Group B M	Wood Group A U	Group B U
18"(457mm)	24"(610mm)	WURA-1824-W		\$ 397.05	\$ 423.31	\$ 504.83	\$ 531.09	\$ 536.54	\$ 562.80
	27"(686mm)	WURA-1827-W		426.99	454.84	540.25	568.10	572.36	600.21
	30"(762mm)	WURA-1830-W		456.93	486.37	578.41	607.85	611.12	640.56
	33"(838mm)	WURA-1833-W		486.87	517.90	616.57	647.60	649.88	680.91
	36"(914mm)	WURA-1836-W		516.81	549.43	654.73	687.35	688.64	721.26
	39"(991mm)	WURA-1839-W		546.75	580.96	692.89	727.10	727.40	761.61
	42"(1067mm)	WURA-1842-W		576.69	612.49	731.05	766.85	766.16	801.96
	45"(1143mm)	WURA-1845-W		606.63	644.02	769.21	806.60	804.92	842.31
	48"(1219mm)	WURA-1848-W		704.85	743.83	875.65	914.63	911.96	950.94
	51"(1295mm)	WURA-1851-W		734.79	775.36	913.81	954.38	950.72	991.29
	54"(1372mm)	WURA-1854-W		764.73	806.89	951.97	994.13	989.48	1031.64
	57"(1448mm)	WURA-1857-W		794.67	838.42	990.13	1033.88	1028.24	1071.99
	60"(1524mm)	WURA-1860-W		824.61	869.95	1028.29	1073.63	1067.00	1112.34
	63"(1600mm)	WURA-1863-W		854.55	901.48	1066.45	1113.38	1105.76	1152.69
	66"(1676mm)	WURA-1866-W		884.49	933.01	1104.61	1153.13	1144.52	1193.04
	69"(1753mm)	WURA-1869-W		914.43	964.54	1142.77	1192.88	1183.28	1233.39
	72"(1829mm)	WURA-1872-W		944.37	996.07	1180.93	1232.63	1222.04	1273.74
	75"(1905mm)	WURA-1875-W		974.31	1027.60	1219.09	1272.38	1260.80	1314.09
	78"(1981mm)	WURA-1878-W		1004.25	1059.13	1257.25	1312.13	1299.56	1354.44
	81"(2057mm)	WURA-1881-W		1034.19	1090.66	1295.41	1351.88	1338.32	1394.79
	84"(2134mm)	WURA-1884-W		1064.13	1122.19	1333.57	1391.63	1377.08	1435.14
	87"(2210mm)	WURA-1887-W		1094.07	1153.72	1371.73	1431.38	1415.84	1475.49
	90"(2286mm)	WURA-1890-W		1124.01	1185.25	1409.89	1471.13	1454.60	1515.84
	93"(2362mm)	WURA-1893-W		1153.95	1216.78	1448.05	1510.88	1493.36	1556.19
	96"(2438mm)	WURA-1896-W		1183.89	1248.31	1486.21	1550.63	1532.12	1596.54
	99"(2515mm)	WURA-1899-W		1213.83	1279.84	1524.37	1590.38	1570.88	1636.89
	102"(2591mm)	WURA-18A2-W		1243.77	1311.37	1562.53	1630.13	1609.64	1677.24
	105"(2667mm)	WURA-18A5-W		1273.71	1342.90	1600.69	1669.88	1648.40	1717.59
	108"(2743mm)	WURA-18A8-W		1303.65	1374.43	1638.85	1709.63	1687.16	1757.94
	111"(2819mm)	WURA-18B1-W		1333.59	1405.96	1677.01	1749.38	1725.92	1798.29
	114"(2890mm)	WURA-18B4-W		1363.53	1437.49	1715.17	1789.13	1764.68	1838.64
	117"(2972mm)	WURA-18B7-W		1393.47	1469.02	1753.33	1828.88	1803.44	1878.99
	120"(3048mm)	WURA-18C0-W		1423.41	1500.55	1791.49	1868.63	1842.20	1919.34
24"(610mm)	24"(610mm)	WURA-2424-W		\$ 439.06	\$ 465.32	\$ 557.34	\$ 583.60	\$ 594.31	\$ 620.57
	27"(686mm)	WURA-2427-W		472.15	500.00	595.91	623.76	633.28	661.13
	30"(762mm)	WURA-2430-W		505.24	534.68	637.22	666.66	675.19	704.63
	33"(839mm)	WURA-2433-W		538.33	569.36	678.53	709.56	717.10	748.13
	36"(914mm)	WURA-2436-W		571.42	604.04	719.84	752.46	759.01	791.63
	39"(991mm)	WURA-2439-W		604.51	638.72	761.15	795.36	800.92	835.13
	42"(1067mm)	WURA-2442-W		637.60	673.40	802.46	838.26	842.83	878.63
	45"(1143mm)	WURA-2445-W		670.69	708.08	843.77	881.16	884.74	922.13
	48"(1219mm)	WURA-2448-W		722.06	811.04	953.36	992.34	994.93	1033.91
	51"(1295mm)	WURA-2451-W		805.15	845.72	994.67	1035.24	1036.84	1077.41
	54"(1372mm)	WURA-2454-W		838.24	880.40	1035.98	1078.14	1078.75	1120.91
	57"(1448mm)	WURA-2457-W		871.33	915.08	1077.29	1121.04	1120.66	1164.41
	60"(1524mm)	WURA-2460-W		904.42	949.76	1118.60	1163.94	1162.57	1207.91
	63"(1600mm)	WURA-2463-W		937.51	984.44	1159.91	1206.84	1204.48	1251.41
	66"(1676mm)	WURA-2466-W		970.60	1019.12	1201.22	1249.74	1246.39	1294.91
	69"(1753mm)	WURA-2469-W		1003.69	1053.80	1242.53	1292.64	1288.30	1338.41
	72"(2429mm)	WURA-2472-W		1036.78	1088.48	1283.84	1335.54	1330.21	1381.91
	75"(1905mm)	WURA-2475-W		1069.87	1123.16	1325.15	1378.44	1372.12	1425.41
	78"(1981mm)	WURA-2478-W		1102.96	1157.84	1366.46	1421.34	1414.03	1468.91
	81"(2057mm)	WURA-2481-W		1136.05	1192.52	1407.77	1464.24	1455.94	1512.41
	84"(2134mm)	WURA-2484-W		1169.14	1227.20	1449.08	1507.14	1497.85	1555.91
	87"(2210mm)	WURA-2487-W		1202.23	1261.88	1490.39	1550.04	1539.76	1599.41
	90"(2286mm)	WURA-2490-W		1235.32	1296.56	1531.70	1592.94	1581.67	1642.91
	93"(2362mm)	WURA-2493-W		1268.41	1331.24	1573.01	1635.84	1623.58	1686.41
	96"(2438mm)	WURA-2496-W		1301.50	1365.92	1614.32	1678.74	1665.49	1729.91
	99"(2489mm)	WURA-2499-W		1334.59	1400.60	1655.63	1721.64	1707.40	1773.41
	102"(2591mm)	WURA-24A2-W		1367.68	1435.28	1696.94	1764.54	1749.31	1816.91
	105"(2667mm)	WURA-24A5-W		1400.77	1469.96	1738.25	1807.44	1791.22	1860.41
	108"(2743mm)	WURA-24A8-W		1433.86	1504.64	1779.56	1850.34	1833.13	1903.91
	111"(2819mm)	WURA-24B1-W		1466.95	1539.32	1820.87	1893.24	1875.04	1947.41
	114"(2890mm)	WURA-24B4-W		1500.04	1574.00	1862.18	1936.14	1916.95	1990.91
	117"(2972mm)	WURA-24B7-W		1533.13	1608.68	1903.49	1979.04	1958.86	2034.41
	120"(3048mm)	WURA-24C0-W		1566.22	1643.36	1944.80	2021.94	2000.77	2077.91

Adaptable Worksurfaces — Wood



Rectangular

Depth	Width	Number	①②③	Wood Group A K	Group B K	Wood Group A M	Group B M	Wood Group A U	Group B U
30"(762mm)	24"(610mm)	WURA-3024-W		\$ 633.39	\$ 659.65	\$ 798.94	\$ 825.20	\$ 846.41	\$ 872.67
	27"(686mm)	WURA-3027-W		669.63	697.48	840.66	868.51	888.53	916.38
	30"(762mm)	WURA-3030-W		705.87	735.31	885.12	914.56	933.59	963.03
	33"(838mm)	WURA-3033-W		742.11	773.14	929.58	960.61	978.65	1009.68
	36"(914mm)	WURA-3036-W		778.35	810.97	974.04	1006.66	1023.71	1056.33
	39"(991mm)	WURA-3039-W		814.59	848.80	1018.50	1052.71	1068.77	1102.98
	42"(1067mm)	WURA-3042-W		850.83	886.63	1062.96	1098.76	1113.83	1149.63
	45"(1143mm)	WURA-3045-W		887.07	924.46	1107.42	1144.81	1158.89	1196.28
	48"(1219mm)	WURA-3048-W		991.59	1030.57	1220.16	1259.14	1272.23	1311.21
	51"(1295mm)	WURA-3051-W		1027.83	1068.40	1264.62	1305.19	1317.29	1357.86
	54"(1372mm)	WURA-3054-W		1064.07	1106.23	1309.08	1351.24	1362.35	1404.51
	57"(1448mm)	WURA-3057-W		1100.31	1144.06	1353.54	1397.29	1407.41	1451.16
	60"(1524mm)	WURA-3060-W		1136.55	1181.89	1398.00	1443.34	1452.47	1497.81
	63"(1600mm)	WURA-3063-W		1172.79	1219.72	1442.46	1489.39	1497.53	1544.46
	66"(1676mm)	WURA-3066-W		1209.03	1257.55	1486.92	1535.44	1542.59	1591.11
	69"(1753mm)	WURA-3069-W		1245.27	1295.38	1531.38	1581.49	1587.65	1637.76
	72"(1829mm)	WURA-3072-W		1281.51	1333.21	1575.84	1627.54	1632.71	1684.41
	75"(1905mm)	WURA-3075-W		1317.75	1371.04	1620.30	1673.59	1677.77	1731.06
	78"(1981mm)	WURA-3078-W		1353.99	1408.87	1664.76	1719.64	1722.83	1777.71
	81"(2057mm)	WURA-3081-W		1390.23	1446.70	1709.22	1765.69	1767.89	1824.36
	84"(2134mm)	WURA-3084-W		1426.47	1484.53	1753.68	1811.74	1812.95	1871.01
	87"(2210mm)	WURA-3087-W		1462.71	1522.36	1798.14	1857.79	1858.01	1917.66
	90"(2286mm)	WURA-3090-W		1498.95	1560.19	1842.60	1903.84	1903.07	1964.31
	93"(2362mm)	WURA-3093-W		1535.19	1598.02	1887.06	1949.89	1948.13	2010.96
	96"(2438mm)	WURA-3096-W		1571.43	1635.85	1931.52	1995.94	1993.19	2057.61
	99"(2515mm)	WURA-3099-W		1607.67	1673.68	1975.98	2041.99	2038.25	2104.26
	102"(2591mm)	WURA-30A2-W		1643.91	1711.51	2020.44	2088.04	2083.31	2150.91
	105"(2667mm)	WURA-30A5-W		1680.15	1749.34	2064.90	2134.09	2128.37	2197.56
	108"(2743mm)	WURA-30A8-W		1716.39	1787.17	2109.36	2180.14	2173.43	2244.21
	111"(2819mm)	WURA-30B1-W		1752.63	1825.00	2153.82	2226.19	2218.49	2290.86
	114"(2890mm)	WURA-30B4-W		1788.87	1862.83	2198.28	2272.24	2263.55	2337.51
	117"(2972mm)	WURA-30B7-W		1825.11	1900.66	2242.74	2318.29	2308.61	2384.16
	120"(3048mm)	WURA-30C0-W		1861.35	1938.49	2287.20	2364.34	2353.67	2430.81

Adaptable Worksurfaces — Wood

Rectangular Key

Depth	Width	Number	① ② ③	Wood Group A K	Group B K	Wood Group A M	Group B M	Wood Group A U	Group B U
30"(762mm)	36"(914mm)	WURY-3036-W		\$1617.72	\$1714.26	\$1998.55	\$2095.09	\$2131.15	\$2227.69
	48"(1219mm)	WURY-3048-W		1704.18	1816.10	2100.92	2212.84	2242.75	2354.67
36"(914mm)	48"(1219mm)	WURY-3648-W		\$1804.43	\$1934.17	\$2236.07	\$2365.81	\$2371.11	\$2500.85
	60"(1524mm)	WURY-3660-W		1890.89	2036.01	2338.44	2483.56	2482.71	2627.83
	72"(1829mm)	WURY-3672-W		1977.35	2137.85	2440.81	2601.31	2594.31	2754.81
42"(1067mm)	60"(1524mm)	WURY-4260-W		\$1991.14	\$2154.08	\$2473.59	\$2636.53	\$2611.07	\$2774.01
	72"(1829mm)	WURY-4272-W		2077.60	2255.92	2575.96	2754.28	2722.67	2900.99
48"(1219mm)	60"(1524mm)	WURY-4860-W		\$2091.39	\$2272.15	\$2608.74	\$2789.50	\$2739.43	\$2920.19
	72"(1829mm)	WURY-4872-W		2177.85	2373.99	2711.11	2907.25	2851.03	3047.17



WURY-W

Features

- Includes worksurface and tie plate.
- Wood veneer surface with:
 - 3mm edgeband (K) or knife edge (U) on user edge and 1mm edgeband on sides and back, or
 - Cascade (M) on user edge and 1mm edgeband on sides and back.
- Worksurface width dimension attaches directly to panel and matches panel width.**
- Worksurfaces predrilled to accept most support options.
- Optional wireways along back edges are Charcoal. Refer to Specification Guide for wireway details.
- 72"(1829mm) worksurface has two wireways.
- Installed worksurfaces without wireway will not allow clearance for power plug.**
- Depths and widths shown in nominal dimensions.

Specification Tips

- Worksurface support specific to product line and worksurface edge guidelines; must be separately specified; refer to Specification Guide for support and load.**
 - Flush-mount plate
- Knife edge requires use of worksurface supports for that application; worksurface support panel and/or side brackets for use with knife edge.
- Support post or height adjustment disc base is required.**

To Order, Specify:

- Product number.
- Wood finish color.

① Edge Options:

- K** Wood Edgeband
- M** Wood Cascade
- U** Wood Knife

② Core Options:

- S** Standard
- G** Green, add \$109.26 list.

③ Wireway Options:

- A** Notched
- B** Curved
- C** Without

Adaptable Worksurfaces — Wood

Rectangular Swell

Depth	Swell Depth	Width	Number	①②③	Wood Group A K	Group B K	Wood Group A U	Group B U
18"(457mm)	21"(533mm)	24"(610mm)	WURS-1824-W	■ ■ ■	\$ 546.00	\$ 577.20	\$ 725.71	\$ 756.91
		30"(762mm)	WURS-1830-W	■ ■ ■	600.90	635.22	795.16	829.48
		36"(914mm)	WURS-1836-W	■ ■ ■	655.80	693.24	867.52	904.96
		42"(1067mm)	WURS-1842-W	■ ■ ■	710.70	751.26	939.88	980.44
		48"(1219mm)	WURS-1848-W	■ ■ ■	765.60	809.28	1012.24	1055.92
		54"(1372mm)	WURS-1854-W	■ ■ ■	820.50	867.30	1084.60	1131.40
		60"(1524mm)	WURS-1860-W	■ ■ ■	875.40	925.32	1156.96	1206.88
24"(610mm)	27"(686mm)	24"(610mm)	WURS-2424-W	■ ■ ■	\$ 564.72	\$ 595.92	\$ 749.63	\$ 780.83
		30"(762mm)	WURS-2430-W	■ ■ ■	622.74	657.06	822.20	856.52
		36"(914mm)	WURS-2436-W	■ ■ ■	680.76	718.20	897.68	935.12
		42"(1067mm)	WURS-2442-W	■ ■ ■	738.78	779.34	973.16	1013.72
		48"(1219mm)	WURS-2448-W	■ ■ ■	796.80	840.48	1048.64	1092.32
		54"(1372mm)	WURS-2454-W	■ ■ ■	854.82	901.62	1124.12	1170.92
		60"(1524mm)	WURS-2460-W	■ ■ ■	912.84	962.76	1199.60	1249.52
30"(762mm)	33"(838mm)	24"(610mm)	WURS-3024-W	■ ■ ■	\$ 741.52	\$ 772.72	\$ 973.23	\$1004.43
		30"(762mm)	WURS-3030-W	■ ■ ■	802.66	836.98	1048.92	1083.24
		36"(914mm)	WURS-3036-W	■ ■ ■	863.80	901.24	1127.52	1164.96
		42"(1067mm)	WURS-3042-W	■ ■ ■	924.94	965.50	1206.12	1246.68
		48"(1219mm)	WURS-3048-W	■ ■ ■	986.08	1029.76	1284.72	1328.40
		54"(1372mm)	WURS-3054-W	■ ■ ■	1047.22	1094.02	1363.32	1410.12
		60"(1524mm)	WURS-3060-W	■ ■ ■	1108.36	1158.28	1441.92	1491.84



WURS-W

Features

- Includes worksurface and tie plate.
- Wood veneer worksurface with:
 - 3mm edgeband (K) or knife edge (U) on user edge and 1mm edgeband on sides and back.
- Worksurfaces predrilled to accept most support options.
- Optional wireway will be Charcoal. Refer to Specification Guide for wireway details.
- **Installed worksurfaces without wireway will not allow clearance for power plug.**
- Depths and widths shown in nominal dimensions.

Specification Tips

- **Worksurface support specific to product line and worksurface edge guidelines; must be separately specified; refer to Specification Guide for support and load.**
 - Cantilever bracket
 - Side brackets
 - Worksurface support panel
 - Worksurface support column or leg
- Knife edge requires use of worksurface supports for that application; worksurface support panel and/or side brackets for use with knife edge.
 - Mini cantilever brackets are for use with 18"(457mm) deep worksurfaces with knife edge only.
- Suggested pedestal style is mobile.
- **Due to manufacturing restrictions, not available with wood Cascade edge.**

Note: Separately specified worksurface reinforcement channels provide additional support for worksurfaces with 50"(1270mm) spans that are heavily loaded and not otherwise supported by mid-span cantilevers, worksurface support panels, columns, legs or attached lower storage.

To Order, Specify:

- 1) Product number.
- 2) Wood finish color.

① Edge Options:

- K** Wood Edgeband
- U** Wood Knife

② Core Options:

- S** Standard
- G** Green, add \$109.26 list.

③ Wireway Options:

- A** Notched
- B** Curved
- C** Without

Adaptable Worksurfaces — Wood

Rectangular Inverse Swell

Depth	Swell Depth	Width	Number	①②③	Wood Group A K	Group B K	Wood Group A U	Group B U
18"(457mm)	15"(381mm)	24"(610mm)	WURW-1824-W	■ ■ ■	\$ 546.00	\$ 577.20	\$ 725.71	\$ 756.91
		30"(762mm)	WURW-1830-W	■ ■ ■	600.90	635.22	795.16	829.48
		36"(914mm)	WURW-1836-W	■ ■ ■	655.80	693.24	867.52	904.96
		42"(1067mm)	WURW-1842-W	■ ■ ■	710.70	751.26	939.88	980.44
		48"(1219mm)	WURW-1848-W	■ ■ ■	765.60	809.28	1012.24	1055.92
		54"(1372mm)	WURW-1854-W	■ ■ ■	820.50	867.30	1084.60	1131.40
		60"(1524mm)	WURW-1860-W	■ ■ ■	875.40	925.32	1156.96	1206.88
24"(610mm)	21"(533mm)	24"(610mm)	WURW-2424-W	■ ■ ■	\$ 564.72	\$ 595.92	\$ 749.63	\$ 780.83
		30"(762mm)	WURW-2430-W	■ ■ ■	622.74	657.06	822.20	856.52
		36"(914mm)	WURW-2436-W	■ ■ ■	680.76	718.20	897.68	935.12
		42"(1067mm)	WURW-2442-W	■ ■ ■	738.78	779.34	973.16	1013.72
		48"(1219mm)	WURW-2448-W	■ ■ ■	796.80	840.48	1048.64	1092.32
		54"(1372mm)	WURW-2454-W	■ ■ ■	854.82	901.62	1124.12	1170.92
		60"(1524mm)	WURW-2460-W	■ ■ ■	912.84	962.76	1199.60	1249.52
30"(762mm)	27"(686mm)	24"(610mm)	WURW-3024-W	■ ■ ■	\$ 741.52	\$ 772.72	\$ 973.23	\$1004.43
		30"(762mm)	WURW-3030-W	■ ■ ■	802.66	836.98	1048.92	1083.24
		36"(914mm)	WURW-3036-W	■ ■ ■	863.80	901.24	1127.52	1164.96
		42"(1067mm)	WURW-3042-W	■ ■ ■	924.94	965.50	1206.12	1246.68
		48"(1219mm)	WURW-3048-W	■ ■ ■	986.08	1029.76	1284.72	1328.40
		54"(1372mm)	WURW-3054-W	■ ■ ■	1047.22	1094.02	1363.32	1410.12
		60"(1524mm)	WURW-3060-W	■ ■ ■	1108.36	1158.28	1441.92	1491.84



WURW-W

Features

- Includes work surface and tie plate.
- Wood veneer work surface with:
 - 3mm edgeband (K) or knife edge (U) on user edge and 1mm edgeband on sides and back.
- Worksurfaces predrilled to accept most support options.
- Optional wireway will be Charcoal. Refer to Specification Guide for wireway details.
- Installed worksurfaces without wireway will not allow clearance for power plug.**
- Depths and widths shown in nominal dimensions.

Specification Tips

- Work surface support specific to product line and work surface edge guidelines; must be separately specified; refer to Specification Guide for support and load.**
 - Cantilever bracket
 - Side brackets
 - Work surface support panel
 - Work surface support column or leg
- Knife edge requires use of work surface supports for that application; work surface support panel and/or side brackets for use with knife edge.
 - Mini cantilever brackets are for use with 18"(457mm) deep work surfaces with knife edge only.
- Suggested pedestal style is mobile.
- Due to manufacturing restrictions, not available with wood Cascade edge.**

Note: Separately specified work surface reinforcement channels provide additional support for work surfaces with 50"(1270mm) spans that are heavily loaded and not otherwise supported by mid-span cantilevers, work surface support panels, columns, legs or attached lower storage.

To Order, Specify:

- Product number.
- Wood finish color.

① Edge Options:

- K** Wood Edgeband
- U** Wood Knife

② Core Options:

- S** Standard
- G** Green, add \$109.26 list.


③ Wireway Options:

- A** Notched
- B** Curved
- C** Without

Adaptable Worksurfaces — Wood

Rectangular Transition

Left/Right Depth	Width	Number	①②③	Wood Group A K	Group B K	Wood Group A M	Group B M	Wood Group A U	Group B U
18"(457mm)/ 24"(610mm)	24"(610mm)	WURT-2424-W	■ ■ ■ N34	\$ 599.60	\$ 631.27	\$ 755.83	\$ 787.50	\$ 795.94	\$ 827.61
	30"(762mm)	WURT-2430-W	■ ■ ■ N34	675.62	711.07	850.87	886.32	892.24	927.69
	36"(914mm)	WURT-2436-W	■ ■ ■ N34	751.64	790.87	945.91	985.14	988.54	1027.77
	42"(1067mm)	WURT-2442-W	■ ■ ■ N34	827.66	870.67	1040.95	1083.96	1084.84	1127.85
	48"(1219mm)	WURT-2448-W	■ ■ ■ N34	903.68	950.47	1135.99	1182.78	1181.14	1227.93
	54"(1372mm)	WURT-2454-W	■ ■ ■ N34	979.70	1030.27	1231.03	1281.60	1277.44	1328.01
	60"(1524mm)	WURT-2460-W	■ ■ ■ N34	1055.72	1110.07	1326.07	1380.42	1373.74	1428.09
24"(610mm)/ 18"(457mm)	24"(610mm)	WURT-2424-W	■ ■ ■ N43	\$ 599.60	\$ 631.27	\$ 755.83	\$ 787.50	\$ 795.94	\$ 827.61
	30"(762mm)	WURT-2430-W	■ ■ ■ N43	675.62	711.07	850.87	886.32	892.24	927.69
	36"(914mm)	WURT-2436-W	■ ■ ■ N43	751.64	790.87	945.91	985.14	988.54	1027.77
	42"(1067mm)	WURT-2442-W	■ ■ ■ N43	827.66	870.67	1040.95	1083.96	1084.84	1127.85
	48"(1219mm)	WURT-2448-W	■ ■ ■ N43	903.68	950.47	1135.99	1182.78	1181.14	1227.93
	54"(1372mm)	WURT-2454-W	■ ■ ■ N43	979.70	1030.27	1231.03	1281.60	1277.44	1328.01
	60"(1524mm)	WURT-2460-W	■ ■ ■ N43	1055.72	1110.07	1326.07	1380.42	1373.74	1428.09
24"(610mm)/ 30"(762mm)	24"(610mm)	WURT-3024-W	■ ■ ■ N45	\$ 620.71	\$ 652.38	\$ 776.94	\$ 808.61	\$ 817.05	\$ 848.72
	30"(762mm)	WURT-3030-W	■ ■ ■ N45	696.73	732.18	871.98	907.43	913.35	948.80
	36"(914mm)	WURT-3036-W	■ ■ ■ N45	772.75	811.98	967.02	1006.25	1009.65	1048.88
	42"(1067mm)	WURT-3042-W	■ ■ ■ N45	848.77	891.78	1062.06	1105.07	1105.95	1148.96
	48"(1219mm)	WURT-3048-W	■ ■ ■ N45	924.79	971.58	1157.10	1203.89	1202.25	1249.04
	54"(1372mm)	WURT-3054-W	■ ■ ■ N45	1000.81	1051.38	1252.14	1302.71	1298.55	1349.12
	60"(1524mm)	WURT-3060-W	■ ■ ■ N45	1076.83	1131.18	1347.18	1401.53	1394.85	1449.20
30"(762mm)/ 24"(610mm)	24"(610mm)	WURT-3024-W	■ ■ ■ N54	\$ 620.71	\$ 652.38	\$ 776.94	\$ 808.61	\$ 817.05	\$ 848.72
	30"(762mm)	WURT-3030-W	■ ■ ■ N54	696.73	732.18	871.98	907.43	913.35	948.80
	36"(914mm)	WURT-3036-W	■ ■ ■ N54	772.75	811.98	967.02	1006.25	1009.65	1048.88
	42"(1067mm)	WURT-3042-W	■ ■ ■ N54	848.77	891.78	1062.06	1105.07	1105.95	1148.96
	48"(1219mm)	WURT-3048-W	■ ■ ■ N54	924.79	971.58	1157.10	1203.89	1202.25	1249.04
	54"(1372mm)	WURT-3054-W	■ ■ ■ N54	1000.81	1051.38	1252.14	1302.71	1298.55	1349.12
	60"(1524mm)	WURT-3060-W	■ ■ ■ N54	1076.83	1131.18	1347.18	1401.53	1394.85	1449.20



WURT-WN43



WURT-WN34

Features

- Includes worksurface and tie plate.
- Wood veneer worksurface with:
 - 3mm edgeband (K) or knife edge (U) on user edge and 1mm edgeband on sides and back, or
 - Cascade (M) on user edge and 1mm edgeband on sides and back.
- Worksurfaces predrilled to accept most support options.
- Optional wireway will be Charcoal. Refer to Specification Guide for wireway details.
- **Installed worksurfaces without wireway will not allow clearance for power plug.**
- Depths and widths shown in nominal dimensions.

Specification Tips

- **Worksurface support specific to product line and worksurface edge guidelines; must be separately specified; refer to Specification Guide for support and load.**
 - Cantilever bracket
 - Side brackets
 - Worksurface support panel
 - Worksurface support column or leg
 - Attached lower storage
- Knife edge requires use of worksurface supports for that application; worksurface support panel and/or side brackets for use with knife edge.
- Mini cantilever brackets are for use with 18"(457mm) deep worksurfaces with knife edge only.
- For worksurfaces less than 42"(1067mm) wide, suggested pedestal style is mobile.
- For worksurfaces greater than 42"(1067mm) wide, attached pedestal may be installed on deepest side.

Note: Separately specified worksurface reinforcement channels provide additional support for worksurfaces with 50"(1270mm) spans that are heavily loaded and not otherwise supported by mid-span cantilevers, worksurface support panels, columns, legs or attached lower storage.

To Order, Specify:

- 1) Product number.
- 2) Wood finish color.

① Edge Options:

- K** Wood Edgeband
- M** Wood Cascade
- U** Wood Knife

② Core Options:

- S** Standard
- G** Green, add \$109.26 list.



③ Wireway Options:

- A** Notched
- B** Curved
- C** Without


This page intentionally blank

Adaptable Worksurfaces — Wood

Wedge



WURE-WN34



WURE-WN43

Features

- Includes worksurface and tie plate.
- Wood veneer worksurface with:
 - 3mm edgeband (K) or knife edge (U) on user edge and 1mm edgeband on side and back, or
 - Cascade (M) on user edge and 1mm edgeband on side and back.
- Worksurfaces predrilled to accept most support options.
- Optional wireways along back edges are Charcoal. Refer to Specification Guide for wireway details.
- **Installed worksurfaces without wireway will not allow clearance for power plug.**
- Depths and widths shown in nominal dimensions.

Specification Tips

- **Worksurface support specific to product line and worksurface edge guidelines; must be separately specified; refer to Specification Guide for support and load.**
 - Cantilever bracket
 - Side brackets
 - Worksurface support panel
 - Worksurface support column or leg
- Knife edge requires use of worksurface supports for that application; worksurface support panel and/or side brackets for use with knife edge.
- Mini cantilever brackets are for use with 18”(457mm) deep worksurfaces with knife edge only.
- **Suggested pedestal style is mobile.**

Note: Separately specified worksurface reinforcement channels provide additional support for worksurfaces with 50”(1270mm) spans that are heavily loaded and not otherwise supported by mid-span cantilevers, worksurface end panels, posts or attached lower storage.

To Order, Specify:

- 1) Product number.
- 2) Wood finish color.

1 Edge Options:

- K** Wood Edgeband
- M** Wood Cascade
- U** Wood Knife

2 Core Options:

- S** Standard
- G** Green, add \$109.26 list.

3 Wireway Options:

- A** Notched
- B** Curved
- C** Without

Adaptable Worksurfaces — Wood



Wedge

Left/Right Depth	Width	Number	①②③		Wood	Group B	Wood	Group B	Wood	Group B
					Group A	K	Group A	M	Group A	M
24"(610mm)/18"(457mm)	24"(610mm)	WURE-2424-W		N43	\$ 619.73	\$ 636.54	\$ 762.58	\$ 779.39	\$ 803.55	\$ 820.36
	30"(762mm)	WURE-2430-W		N43	695.33	721.62	855.22	881.51	901.89	928.18
	36"(914mm)	WURE-2436-W		N43	770.93	806.70	947.86	983.63	1000.23	1036.00
	42"(1067mm)	WURE-2442-W		N43	846.53	891.78	1040.50	1085.75	1098.57	1143.82
	48"(1219mm)	WURE-2448-W		N43	922.13	976.86	1133.14	1187.87	1196.91	1251.64
	54"(1372mm)	WURE-2454-W		N43	997.73	1061.94	1225.78	1289.99	1295.25	1359.46
	60"(1524mm)	WURE-2460-W		N43	1073.33	1147.02	1318.42	1392.11	1393.59	1467.28
	66"(1676mm)	WURE-2466-W		N43	1148.93	1232.10	1411.06	1494.23	1491.93	1575.10
	72"(1829mm)	WURE-2472-W		N43	1224.53	1317.18	1503.70	1596.35	1590.27	1682.92
	78"(1981mm)	WURE-2478-W		N43	1300.13	1402.26	1596.34	1698.47	1688.61	1790.74
	84"(2134mm)	WURE-2484-W		N43	1375.73	1487.34	1688.98	1800.59	1786.95	1898.56
	90"(2286mm)	WURE-2490-W		N43	1451.33	1572.42	1781.62	1902.71	1885.29	2006.38
	96"(2438mm)	WURE-2496-W		N43	1526.93	1657.50	1874.26	2004.83	1983.63	2114.20
	102"(2591mm)	WURE-24A2-W		N43	1602.53	1742.58	1966.90	2106.95	2081.97	2222.02
	108"(2743mm)	WURE-24A8-W		N43	1678.13	1827.66	2059.54	2209.07	2180.31	2329.84
	114"(2896mm)	WURE-24B4-W		N43	1728.53	1884.38	2121.30	2277.15	2245.87	2401.72
120"(3048mm)	WURE-24C0-W		N43	1829.33	1997.82	2244.82	2413.31	2376.99	2545.48	
18"(457mm)/24"(610mm)	24"(610mm)	WURE-2424-W		N34	\$ 619.73	\$ 636.54	\$ 762.58	\$ 779.39	\$ 803.55	\$ 820.36
	30"(762mm)	WURE-2430-W		N34	695.33	721.62	855.22	881.51	901.89	928.18
	36"(914mm)	WURE-2436-W		N34	770.93	806.70	947.86	983.63	1000.23	1036.00
	42"(1067mm)	WURE-2442-W		N34	846.53	891.78	1040.50	1085.75	1098.57	1143.82
	48"(1219mm)	WURE-2448-W		N34	922.13	976.86	1133.14	1187.87	1196.91	1251.64
	54"(1372mm)	WURE-2454-W		N34	997.73	1061.94	1225.78	1289.99	1295.25	1359.46
	60"(1524mm)	WURE-2460-W		N34	1073.33	1147.02	1318.42	1392.11	1393.59	1467.28
	66"(1676mm)	WURE-2466-W		N34	1148.93	1232.10	1411.06	1494.23	1491.93	1575.10
	72"(1829mm)	WURE-2472-W		N34	1224.53	1317.18	1503.70	1596.35	1590.27	1682.92
	78"(1981mm)	WURE-2478-W		N34	1300.13	1402.26	1596.34	1698.47	1688.61	1790.74
	84"(2134mm)	WURE-2484-W		N34	1375.73	1487.34	1688.98	1800.59	1786.95	1898.56
	90"(2286mm)	WURE-2490-W		N34	1451.33	1572.42	1781.62	1902.71	1885.29	2006.38
	96"(2438mm)	WURE-2496-W		N34	1526.93	1657.50	1874.26	2004.83	1983.63	2114.20
	102"(2591mm)	WURE-24A2-W		N34	1602.53	1742.58	1966.90	2106.95	2081.97	2222.02
	108"(2743mm)	WURE-24A8-W		N34	1678.13	1827.66	2059.54	2209.07	2180.31	2329.84
	114"(2896mm)	WURE-24B4-W		N34	1728.53	1884.38	2121.30	2277.15	2245.87	2401.72
120"(3048mm)	WURE-24C0-W		N34	1829.33	1997.82	2244.82	2413.31	2376.99	2545.48	
30"(762mm)/24"(610mm)	24"(610mm)	WURE-3024-W		N54	\$ 630.23	\$ 647.04	\$ 773.08	\$ 789.89	\$ 814.05	\$ 830.86
	30"(762mm)	WURE-3030-W		N54	705.83	732.12	865.72	892.01	912.39	938.68
	36"(914mm)	WURE-3036-W		N54	781.43	817.20	958.36	994.13	1010.73	1046.50
	42"(1067mm)	WURE-3042-W		N54	857.03	902.28	1051.00	1096.25	1109.07	1154.32
	48"(1219mm)	WURE-3048-W		N54	932.63	987.36	1143.64	1198.37	1207.41	1262.14
	54"(1372mm)	WURE-3054-W		N54	1008.23	1072.44	1236.28	1300.49	1305.75	1369.96
	60"(1524mm)	WURE-3060-W		N54	1083.83	1157.52	1328.92	1402.61	1404.09	1477.78
	66"(1676mm)	WURE-3066-W		N54	1159.43	1242.60	1421.56	1504.73	1502.43	1585.60
	72"(1829mm)	WURE-3072-W		N54	1235.03	1327.68	1514.20	1606.85	1600.77	1693.42
	78"(1981mm)	WURE-3078-W		N54	1310.63	1412.76	1606.84	1708.97	1699.11	1801.24
	84"(2134mm)	WURE-3084-W		N54	1386.23	1497.84	1699.48	1811.09	1797.45	1909.06
	90"(2286mm)	WURE-3090-W		N54	1461.83	1582.92	1792.12	1913.21	1895.79	2016.88
	96"(2438mm)	WURE-3096-W		N54	1537.43	1668.00	1884.76	2015.33	1994.13	2124.70
	102"(2591mm)	WURE-30A2-W		N54	1613.03	1753.08	1977.40	2117.45	2092.47	2232.52
	108"(2743mm)	WURE-30A8-W		N54	1688.63	1838.16	2070.04	2219.57	2190.81	2340.34
	114"(2896mm)	WURE-30B4-W		N54	1739.03	1894.88	2131.80	2287.65	2256.37	2412.22
120"(3048mm)	WURE-30C0-W		N54	1839.83	2008.32	2255.32	2423.81	2387.49	2555.98	
24"(610mm)/30"(762mm)	24"(610mm)	WURE-3024-W		N45	\$ 630.23	\$ 647.04	\$ 773.08	\$ 789.89	\$ 814.05	\$ 830.86
	30"(762mm)	WURE-3030-W		N45	705.83	732.12	865.72	892.01	912.39	938.68
	36"(914mm)	WURE-3036-W		N45	781.43	817.20	958.36	994.13	1010.73	1046.50
	42"(1067mm)	WURE-3042-W		N45	857.03	902.28	1051.00	1096.25	1109.07	1154.32
	48"(1219mm)	WURE-3048-W		N45	932.63	987.36	1143.64	1198.37	1207.41	1262.14
	54"(1372mm)	WURE-3054-W		N45	1008.23	1072.44	1236.28	1300.49	1305.75	1369.96
	60"(1524mm)	WURE-3060-W		N45	1083.83	1157.52	1328.92	1402.61	1404.09	1477.78
	66"(1676mm)	WURE-3066-W		N45	1159.43	1242.60	1421.56	1504.73	1502.43	1585.60
	72"(1829mm)	WURE-3072-W		N45	1235.03	1327.68	1514.20	1606.85	1600.77	1693.42
	78"(1981mm)	WURE-3078-W		N45	1310.63	1412.76	1606.84	1708.97	1699.11	1801.24
	84"(2134mm)	WURE-3084-W		N45	1386.23	1497.84	1699.48	1811.09	1797.45	1909.06
	90"(2286mm)	WURE-3090-W		N45	1461.83	1582.92	1792.12	1913.21	1895.79	2016.88
	96"(2438mm)	WURE-3096-W		N45	1537.43	1668.00	1884.76	2015.33	1994.13	2124.70
	102"(2591mm)	WURE-30A2-W		N45	1613.03	1753.08	1977.40	2117.45	2092.47	2232.52
	108"(2743mm)	WURE-30A8-W		N45	1688.63	1838.16	2070.04	2219.57	2190.81	2340.34
	114"(2896mm)	WURE-30B4-W		N45	1739.03	1894.88	2131.80	2287.65	2256.37	2412.22
120"(3048mm)	WURE-30C0-W		N45	1839.83	2008.32	2255.32	2423.81	2387.49	2555.98	


Adaptable Worksurfaces — Wood

Sharp Wedge

Left/Right Depth	Width	Number	①②③	Wood Group A K	Group B K	Wood Group A U	Group B U
24"(610mm)/18"(457mm)	24"(610mm)	WURG-2424-W	■ ■ ■ N43	\$ 658.70	\$ 725.20	\$ 850.82	\$ 917.32
	30"(762mm)	WURG-2430-W	■ ■ ■ N43	739.77	820.70	956.06	1036.99
	36"(914mm)	WURG-2436-W	■ ■ ■ N43	820.84	916.20	1061.30	1156.66
	42"(1067mm)	WURG-2442-W	■ ■ ■ N43	901.91	1011.70	1166.54	1276.33
	48"(1219mm)	WURG-2448-W	■ ■ ■ N43	982.98	1107.20	1271.78	1396.00
	54"(1372mm)	WURG-2454-W	■ ■ ■ N43	1064.05	1202.70	1377.02	1515.67
	60"(1524mm)	WURG-2460-W	■ ■ ■ N43	1145.12	1298.20	1482.26	1635.34
18"(457mm)/24"(610mm)	24"(610mm)	WURG-2424-W	■ ■ ■ N34	\$ 658.70	\$ 725.20	\$ 850.82	\$ 917.32
	30"(762mm)	WURG-2430-W	■ ■ ■ N34	739.77	820.70	956.06	1036.99
	36"(914mm)	WURG-2436-W	■ ■ ■ N34	820.84	916.20	1061.30	1156.66
	42"(1067mm)	WURG-2442-W	■ ■ ■ N34	901.91	1011.70	1166.54	1276.33
	48"(1219mm)	WURG-2448-W	■ ■ ■ N34	982.98	1107.20	1271.78	1396.00
	54"(1372mm)	WURG-2454-W	■ ■ ■ N34	1064.05	1202.70	1377.02	1515.67
	60"(1524mm)	WURG-2460-W	■ ■ ■ N34	1145.12	1298.20	1482.26	1635.34
30"(762mm)/24"(610mm)	24"(610mm)	WURG-3024-W	■ ■ ■ N54	\$ 674.22	\$ 743.48	\$ 866.34	\$ 935.60
	30"(762mm)	WURG-3030-W	■ ■ ■ N54	755.29	838.98	971.58	1055.27
	36"(914mm)	WURG-3036-W	■ ■ ■ N54	836.36	934.48	1076.82	1174.94
	42"(1067mm)	WURG-3042-W	■ ■ ■ N54	917.43	1029.98	1182.06	1294.61
	48"(1219mm)	WURG-3048-W	■ ■ ■ N54	998.50	1125.48	1287.30	1414.28
	54"(1372mm)	WURG-3054-W	■ ■ ■ N54	1079.57	1220.98	1392.54	1533.95
	60"(1524mm)	WURG-3060-W	■ ■ ■ N54	1160.64	1316.48	1497.78	1653.62
24"(610mm)/30"(762mm)	24"(610mm)	WURG-3024-W	■ ■ ■ N45	\$ 674.22	\$ 743.48	\$ 866.34	\$ 935.60
	30"(762mm)	WURG-3030-W	■ ■ ■ N45	755.29	838.98	971.58	1055.27
	36"(914mm)	WURG-3036-W	■ ■ ■ N45	836.36	934.48	1076.82	1174.94
	42"(1067mm)	WURG-3042-W	■ ■ ■ N45	917.43	1029.98	1182.06	1294.61
	48"(1219mm)	WURG-3048-W	■ ■ ■ N45	998.50	1125.48	1287.30	1414.28
	54"(1372mm)	WURG-3054-W	■ ■ ■ N45	1079.57	1220.98	1392.54	1533.95
	60"(1524mm)	WURG-3060-W	■ ■ ■ N45	1160.64	1316.48	1497.78	1653.62



WURG-WN34



WURG-WN43

Features

- Includes work surface and tie plate.
- Wood veneer surface with:
 - 3mm edgeband (K) or knife (U) on user edge and 1mm edgeband on sides and back, or
- Worksurfaces predrilled to accept most support options.
- Optional wireways along back edges are Charcoal. Refer to Specification Guide for wireway details.
- **Installed worksurfaces without wireway will not allow clearance for power plug.**
- Depths and widths shown in nominal dimensions.

Specification Tips

- **Worksurface support specific to product line and worksurface edge guidelines; must be separately specified.**
 - Cantilever bracket
 - Side brackets
 - Worksurface support panel not recommended**
 - Worksurface support column or leg
- Knife edge requires use of worksurface supports for that application; worksurface support panel and/or side bracket for use with knife edge.
- Mini cantilever brackets are for use with 18"(457mm) deep worksurfaces with knife edge only.
- **Suggested pedestal style is mobile.**
- **Due to manufacturing restrictions, not available with Cascade Edge.**

Note: Separately specified work surface reinforcement channels provide additional support for worksurfaces with 50"(1270mm) spans that are heavily loaded and not otherwise supported by mid-span cantilevers, work surface end panels, posts or attached lower storage.

To Order, Specify:

- 1) Product number.
- 2) Wood finish color.

① Edge Options:

- K** Wood edgeband
- U** Wood Knife

② Core Options:

- S** Standard
- G** Green, add \$109.26 list.

③ Wireway Options:

- A** Notched
- B** Curved
- C** Without

Adaptable Worksurfaces — Wood

Rectangular Radius End

Depth	Width	Number	①②③④	Wood Group A K	Group B K	Wood Group A M	Group B M	Wood Group A U	Group B U
18"(457mm)	24"(610mm)	WURR-1824-W		\$ 582.40	\$ 610.48	\$ 717.29	\$ 745.37	\$ 760.55	\$ 788.63
	30"(762mm)	WURR-1830-W		656.68	687.88	805.62	836.82	867.58	898.78
	36"(914mm)	WURR-1836-W		730.96	765.28	896.76	931.08	981.16	1015.48
	42"(1067mm)	WURR-1842-W		805.24	842.68	987.90	1025.34	1094.74	1132.18
	48"(1219mm)	WURR-1848-W		879.52	920.08	1079.04	1119.60	1208.32	1248.88
	54"(1372mm)	WURR-1854-W		953.80	997.48	1170.18	1365.58	1321.90	1213.86
	60"(1524mm)	WURR-1860-W		1028.08	1074.88	1261.32	1308.12	1435.48	1482.28
24"(610mm)	24"(610mm)	WURR-2424-W		\$ 590.72	\$ 618.80	\$ 729.77	\$ 757.85	\$ 774.07	\$ 802.15
	30"(762mm)	WURR-2430-W		666.86	698.06	819.96	851.16	882.96	914.16
	36"(914mm)	WURR-2436-W		743.00	777.32	912.96	947.28	998.40	1032.72
	42"(1067mm)	WURR-2442-W		819.14	856.58	1005.96	1043.40	1113.84	1151.28
	48"(1219mm)	WURR-2448-W		895.28	935.84	1098.96	1139.52	1229.28	1269.84
	54"(1372mm)	WURR-2454-W		971.42	1015.10	1191.96	1235.64	1344.72	1388.40
	60"(1524mm)	WURR-2460-W		1047.56	1094.36	1284.96	1331.76	1460.16	1506.96
30"(762mm)	24"(610mm)	WURR-3024-W		\$ 725.92	\$ 754.00	\$ 925.29	\$ 953.37	\$ 973.75	\$1001.83
	30"(762mm)	WURR-3030-W		803.92	835.12	1017.34	1048.54	1084.50	1115.70
	36"(914mm)	WURR-3036-W		881.92	916.24	1112.20	1146.52	1201.80	1236.12
	42"(1067mm)	WURR-3042-W		959.92	997.36	1207.06	1244.50	1319.10	1356.54
	48"(1219mm)	WURR-3048-W		1037.92	1078.48	1301.92	1342.48	1436.40	1476.96
	54"(1372mm)	WURR-3054-W		1115.92	1159.60	1396.78	1440.46	1553.70	1597.38
	60"(1524mm)	WURR-3060-W		1193.92	1240.72	1491.64	1538.44	1671.00	1717.80



WURR-W

Features

- Includes worksurface and tie plate.
- Wood veneer worksurface with:
 - 3mm edgeband (K) or knife edge (U) on user edge and 1mm edgeband on side and back, or
 - Cascade (M) on user edge and 1mm edgeband on side and back.
- Worksurfaces predrilled to accept most support options.
- Optional wireway will be Charcoal. Refer to Specification Guide for wireway details.
- Installed worksurfaces without wireway will not allow clearance for power plug.**
- Depths and widths shown in nominal dimensions.

Specification Tips

- Worksurface support specific to product line and worksurface edge guidelines; must be separately specified; refer to Specification Guide for support and load.**
 - Cantilever bracket
 - Side brackets
 - Worksurface support panel
 - Worksurface support column or leg
 - Attached lower storage (for worksurfaces greater than 36" wide)
- Knife edge requires use of worksurface supports for that application; worksurface support panel and/or side brackets for use with knife edge.
- Mini cantilever brackets are for use with 18"(457mm) deep worksurfaces with knife edge only.
- Radius end in all edge options:
 - Side bracket with worksurface support column or leg. Must offer floor support for PREMISE.
- For worksurfaces less than 42"(1067mm) wide, suggested pedestal style is mobile.

Note: Separately specified worksurface reinforcement channels provide additional support for worksurfaces with 50"(1270mm) spans that are heavily loaded and not otherwise supported by mid-span cantilevers, worksurface support panels, columns, legs or attached lower storage.

To Order, Specify:

- Product number.
- Wood finish color.

① Edge Options:

- K** Wood Edgeband
- M** Wood Cascade
- U** Wood Knife

② Core Options:

- S** Standard
- G** Green, add \$109.26 list.

③ Wireway Options:







- A** Notched
- B** Curved
- C** Without



④ Orientation (as seated):

- R** Right-hand
- L** Left-hand

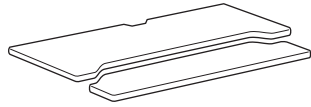Adaptable Worksurfaces — Wood

Rectangular — Split Top

Depth	Width	Number	① ② ③	Wood Group A K	Group B K	Wood Group A M	Group B M
24"(610mm)	36"(914mm)	WURK-2436-W		\$3413.33	\$3582.83	\$4267.20	\$4436.70
	42"(1067mm)	WURK-2442-W		\$3549.25	\$3742.95	\$4437.02	\$4630.72
	48"(1219mm)	WURK-2448-W		\$3685.17	\$3903.07	\$4606.84	\$4824.74
30"(762mm)	36"(914mm)	WURK-3036-W		\$3591.14	\$3792.30	\$4488.72	\$4689.88
	42"(1067mm)	WURK-3042-W		\$3727.06	\$3952.42	\$4658.54	\$4883.90
	48"(1219mm)	WURK-3048-W		\$3862.98	\$4112.54	\$4828.36	\$5077.92



WURK-W

Features

- Includes rear work surface, front work surface, mechanism and tie plate.
- Dual work surfaces with a 1"(25mm) space between the front and rear work surfaces. Front work surface is 12"(305mm) deep.
- Wood veneer work surface with:
 - 3mm edgeband (K) or Cascade (M) edge on front and rear work surface front edge, and 1mm on back and side edge of front and rear work surface.
- Adjustable front work surface is attached to the rear work surface with a spring-assist mechanism.
- Front work surface manually adjusts to any position 7"(178mm) above and 5 3/4"(146mm) below the rear work surface.
- Front work surface tilts -15° to +9°.
- Spring assist mechanism available in charcoal finish color only.
- Optional wireway will be Charcoal.
- Installed work surfaces without wireway will not allow clearance for power plug.**
- Depths and widths shown in nominal dimensions.

Specification Tips

- Fixed-height rear work surface is predrilled to accept standard cantilever brackets.
- Work surface support specific to product line and work surface edge guidelines; must be separately specified; refer to Specification Guide for support and load.**
 - Cantilever bracket
 - Side brackets
 - Work surface support panel
 - Work surface support column or leg

To Order, Specify:

- Product number.
- Wood finish color.

① Edge Options:

- K** Wood Edgeband
- M** Wood Cascade

② Core Options:

- S** Standard
- G** Green, add \$109.26 list.



③ Wireway Options:

- A** Notched
- B** Curved
- C** Without

Adaptable Worksurfaces — Wood

Corner, 90° Straight Front

Left/Right Depth	Width	Number	① ② ③	Wood Group A K	Group B K	Wood Group A U	Group B U
18"(457mm)	36"(914mm)	WUCA-3636-W	■ ■ ■ N33	\$ 718.77	\$ 755.19	\$ 944.79	\$ 981.21
	42"(1067mm)	WUCA-4242-W	■ ■ ■ N33	793.76	848.39	1049.24	1103.87
	48"(1219mm)	WUCA-4848-W	■ ■ ■ N33	928.74	1001.58	1213.68	1286.52
24"(610mm)	36"(914mm)	WUCA-3636-W	■ ■ ■ N44	\$ 738.05	\$ 774.47	\$ 964.07	\$1000.49
	42"(1067mm)	WUCA-4242-W	■ ■ ■ N44	813.04	867.67	1068.52	1123.15
	48"(1219mm)	WUCA-4848-W	■ ■ ■ N44	948.02	1020.86	1232.96	1305.80
30"(762mm)	36"(914mm)	WUCA-3636-W	■ ■ ■ N55	\$ 819.46	\$ 855.88	\$1045.48	\$1081.90
	42"(1067mm)	WUCA-4242-W	■ ■ ■ N55	894.45	949.08	1149.93	1204.56
	48"(1219mm)	WUCA-4848-W	■ ■ ■ N55	1029.43	1102.27	1314.37	1387.21



WUCA-W

Features

- Includes work surface and tie plate.
- Wood veneer work surface with:
 - 3mm edgeband (K) or knife edge (U) on user edge and 1mm edgeband on sides and back.
- Worksurfaces predrilled to accept most support options.
- Optional wireway will be Charcoal.
- Installed worksurfaces without wireway will not allow clearance for power plug.**
- Depths and widths shown in nominal dimensions.

Specification Tips

- Corner bracket is required and must be separately specified.**
- Work surface support specific to product line and work surface edge guidelines; must be separately specified; refer to Specification Guide for support and load.**
 - Corner bracket - REQUIRED
 - Cantilever bracket
 - Work surface support panel
- Knife edge requires use of work surface supports for that application; work surface support panel and/or side brackets for use with knife edge.
- Mini cantilever brackets are for use with 18"(457mm) deep work surfaces with knife edge only.
- Recommend the KU4A-0023- ■ ■ N or KU3A-0023- ■ ■ keyboard pad for 36"(914mm)-wide corners.
- Due to manufacturing restrictions, not available with wood Cascade edge.**

To Order, Specify:

- Product number.
- Wood finish color.

① Edge Options:

- K** Wood Edgeband
- U** Wood Knife

② Core Options:

- S** Standard
- G** Green, add \$109.26 list.

③ Wireway Options:



- A** Notched
- B** Curved
- C** Without

Adaptable Worksurfaces — Wood

Corner, 90° Wrap-Around

Left/Right Depth	Width	Number	① ② ③	Wood Group A K	Group B K	Wood Group A M	Group B M	Wood Group A U	Group B U
18"(457mm)	36"(914mm)	WUCR-3636-W	■ ■ ■ N33	\$644.96	\$ 675.05	\$ 818.76	\$ 848.85	\$ 856.64	\$ 886.73
	42"(1067mm)	WUCR-4242-W	■ ■ ■ N33	752.18	801.65	960.42	1009.89	991.94	1041.41
	48"(1219mm)	WUCR-4848-W	■ ■ ■ N33	859.40	928.25	1102.08	1170.93	1127.24	1196.09
24"(610mm)	36"(914mm)	WUCR-3636-W	■ ■ ■ N44	\$708.86	\$ 748.81	\$ 874.02	\$ 913.97	\$ 920.54	\$ 960.49
	42"(1067mm)	WUCR-4242-W	■ ■ ■ N44	816.08	875.41	1015.68	1075.01	1055.84	1115.17
	48"(1219mm)	WUCR-4848-W	■ ■ ■ N44	923.30	1002.01	1157.34	1236.05	1191.14	1269.85
30"(762mm)	36"(914mm)	(1) WUCR-3636-W	■ ■ ■ N55	\$772.76	\$ 822.57	N/A	N/A	N/A	N/A
	42"(1067mm)	WUCR-4242-W	■ ■ ■ N55	879.98	949.17	1070.94	1140.13	1119.74	1188.93
	48"(1219mm)	WUCR-4848-W	■ ■ ■ N55	987.20	1075.77	1212.60	1301.17	1255.04	1343.61

(1) Cascade edge option not available in this size.



WUCR-W

Features

- Includes worksurface.
- Wood veneer worksurface with:
 - 3mm edgeband (K) or knife edge (U) on user edge and 1mm edgeband on sides and back, or
 - Cascade (M) on user edge and 1mm edgeband on sides and back.
- Worksurfaces predrilled to accept most support options. Optional wireway will be Charcoal. Refer to Specification Guide for wireway details.
- Installed worksurfaces without wireway will not allow clearance for power plug.**
- Depths and widths shown in nominal dimensions.

Specification Tips

- Corner bracket is required and must be separately specified.**
- Worksurface support specific to product line and worksurface edge guidelines; must be separately specified; refer to Specification Guide for support and load.**
 - Corner bracket - REQUIRED
 - Cantilever bracket
 - Worksurface support panel
- Knife edge requires use of worksurface supports for that application; worksurface support panel and/or side brackets for use with knife edge.
- Mini cantilever brackets are for use with 18"(457mm) deep worksurfaces with knife edge only.
- Recommend the KU4A-0023- ■ N or KU3A-0023- ■ ■ keyboard pad for 36"(914mm)-wide corners.

To Order, Specify:

- Product number.
- Wood finish color.

① Edge Options:

- K** Wood Edgeband
- M** Wood Cascade
- U** Wood Knife

② Core Options:

- S** Standard
- G** Green, add \$109.26 list.


③ Wireway Options:

- A** Notched
- B** Curved
- C** Without

Adaptable Worksurfaces — Wood

Corner, 90° Notched

Left/Right Depth	Width	Number	①②③	Wood Group A K	Group B K	Wood Group A M	Group B M	Wood Group A U	Group B U
18"(457mm)	36"(914mm)	WUCN-3636-W	■ ■ ■ N33	\$684.85	\$709.01	\$ 861.32	\$ 885.48	\$ 905.43	\$ 929.59
	42"(1067mm)	WUCN-4242-W	■ ■ ■ N33	798.31	825.65	995.78	1023.12	1045.14	1072.48
	48"(1219mm)	WUCN-4848-W	■ ■ ■ N33	911.77	942.29	1134.44	1164.96	1190.10	1220.62
24"(610mm)	36"(914mm)	WUCN-3636-W	■ ■ ■ N44	\$701.66	\$725.82	\$ 878.13	\$ 902.29	\$ 922.24	\$ 946.40
	42"(1067mm)	WUCN-4242-W	■ ■ ■ N44	815.12	842.46	1012.59	1039.93	1061.95	1089.29
	48"(1219mm)	WUCN-4848-W	■ ■ ■ N44	928.58	959.10	1151.25	1181.77	1206.91	1237.43
30"(762mm)	36"(914mm)	⁽¹⁾ WUCN-3636-W	■ ■ ■ N55	\$718.46	\$742.62	N/A	N/A	\$ 939.04	\$ 963.20
	42"(1067mm)	WUCN-4242-W	■ ■ ■ N55	831.92	859.26	1029.39	1056.73	1078.75	1106.09
	48"(1219mm)	WUCN-4848-W	■ ■ ■ N55	945.38	975.90	1168.05	1198.57	1223.71	1254.23

⁽¹⁾Cascade edge option not available in this size.

WUCN-W

Features

- Includes worksurface and tie plate.
- Wood veneer surface with:
 - 3mm edgeband (K) or knife edge (U) on user edge and 1mm edgeband on sides and back, or
 - Cascade (M) on user edge and 1mm edgeband on sides and back.
- Worksurfaces predrilled to accept most support options.
- Optional wireways along back edges are Charcoal. Refer to Specification Guide for wireway details.
- Installed worksurfaces without wireway will not allow clearance for power plug.**
- Depths and widths shown in nominal dimensions.

Specification Tips

- Corner bracket is required and must be separately specified.**
- Worksurface support specific to product line and worksurface edge guidelines; must be separately specified; refer to Specification Guide for support and load.**
 - Corner bracket - REQUIRED
 - Cantilever bracket
 - Worksurface support panel
- Knife edge requires use of worksurface supports for that application; worksurface support panel and/or side brackets for use with knife edge.
- Mini cantilever brackets are for use with 18"(457mm) deep worksurfaces with knife edge only.
- Recommend the KU4A-0023- ■ N or KU3A-0023- ■ ■ keyboard pad for 36"(914mm)-wide corners.

To Order, Specify:

- Product number.
- Wood finish color.

① Edge Options:

- K** Wood Edgeband
- M** Wood Cascade
- U** Wood Knife

② Core Options:

- S** Standard
- G** Green, add \$109.26 list.


③ Wireway Options:

- A** Notched
- B** Curved
- C** Without


Adaptable Worksurfaces — Wood

Corner, 90° Angled

Left/Right Depth	Width	Number	①②③④	Wood Group A K	Group B K	Wood Group A U	Group B U
18"(457mm)	36"(914mm)	WUCU-3636-W	■ ■ ■ ■ 33	\$658.76	\$ 701.19	\$ 849.70	\$ 892.13
	42"(1067mm)	WUCU-4242-W	■ ■ ■ ■ 33	752.54	821.13	991.27	1059.86
	48"(1219mm)	WUCU-4848-W	■ ■ ■ ■ 33	899.36	994.11	1185.88	1280.63
24"(610mm)	36"(914mm)	WUCU-3636-W	■ ■ ■ ■ 44	\$690.70	\$ 737.43	\$ 873.80	\$ 920.53
	42"(1067mm)	WUCU-4242-W	■ ■ ■ ■ 44	784.48	857.37	1015.37	1088.26
	48"(1219mm)	WUCU-4848-W	■ ■ ■ ■ 44	931.30	1030.35	1209.98	1309.03
30"(762mm)	36"(914mm)	WUCU-3636-W	■ ■ ■ ■ 55	\$722.64	\$ 773.67	\$ 897.90	\$ 948.93
	42"(1067mm)	WUCU-4242-W	■ ■ ■ ■ 55	816.42	893.61	1039.47	1116.66
	48"(1219mm)	WUCU-4848-W	■ ■ ■ ■ 55	963.24	1066.59	1234.08	1337.43



(Left-hand orientation)



(Right-hand orientation)
WUCU-W

Features

- Includes worksurface and tie plate.
- Wood veneer surface with:
 - 3mm edgeband (K) or knife edge (U) on user edge and 1mm edgeband on sides and back.
- Optional wireways along back edges are Charcoal. Refer to Specification Guide for wireway details.
- Installed worksurfaces without wireway will not allow clearance for power plug.**
- Depths and widths shown in nominal dimensions.

Specification Tips

- Corner bracket is required and must be separately specified.**
- Worksurface support specific to product line and worksurface edge guidelines; must be separately specified; refer to Specification Guide for support and load.**
 - Corner bracket - REQUIRED
 - Cantilever bracket
 - Worksurface support panel
- Knife edge requires use of worksurface supports for that application; worksurface support panel and/or side brackets for use with knife edge.
- Mini cantilever brackets are for use with 18"(457mm) deep worksurfaces with knife edge only.
- Recommend the KU4A-0023- ■ N or KU3A-0023- ■ keyboard pad for 36"(914mm)-wide corners.
- Due to manufacturing restrictions, not available with wood Cascade edge.**

To Order, Specify:

- Product number.
- Wood finish color.

① Edge Options:

- K** Wood Edgeband
- U** Wood Knife

② Core Options:

- S** Standard
- G** Green, add \$109.26 list.

③ Wireway Options:

- A** Notched
- B** Curved
- C** Without

④ Orientation (as seated):



- R** Right-hand
- L** Left-hand

Adaptable Worksurfaces — Wood


Corner, 90° Wrap-Around Transitional

Left/Right Depth	Width	Number	①②③	Wood Group A K	Group B K	Wood Group A M	Group B M	Wood Group A U	Group B U
18"(457mm)/24"(610mm)	36"(914mm)	WUCT-3636-W	■ ■ ■ N34	\$676.91	\$ 711.93	\$ 846.39	\$ 881.41	\$ 888.59	\$ 923.61
	42"(1067mm)	WUCT-4242-W	■ ■ ■ N34	784.13	838.53	988.05	1042.45	1023.89	1078.29
	48"(1219mm)	WUCT-4848-W	■ ■ ■ N34	891.35	965.13	1129.71	1203.49	1159.19	1232.97
24"(610mm)/18"(457mm)	36"(914mm)	WUCT-3636-W	■ ■ ■ N43	\$676.91	\$ 711.93	\$ 846.39	\$ 881.41	\$ 888.59	\$ 923.61
	42"(1067mm)	WUCT-4242-W	■ ■ ■ N43	784.13	838.53	988.05	1042.45	1023.89	1078.29
	48"(1219mm)	WUCT-4848-W	■ ■ ■ N43	891.35	965.13	1129.71	1203.49	1159.19	1232.97
24"(610mm)/30"(762mm)	36"(914mm)	(1) WUCT-3636-W	■ ■ ■ N45	\$740.81	\$ 785.69	N/A	N/A	952.49	997.37
	42"(1067mm)	WUCT-4242-W	■ ■ ■ N45	848.03	912.29	1043.31	1107.57	1087.79	1152.05
	48"(1219mm)	WUCT-4848-W	■ ■ ■ N45	955.25	1038.89	1184.97	1268.61	1223.09	1306.73
30"(762mm)/24"(610mm)	36"(914mm)	(1) WUCT-3636-W	■ ■ ■ N54	\$740.81	\$ 785.69	N/A	N/A	952.49	997.37
	42"(1067mm)	WUCT-4242-W	■ ■ ■ N54	848.03	912.29	1043.31	1107.57	1087.79	1152.05
	48"(1219mm)	WUCT-4848-W	■ ■ ■ N54	955.25	1038.89	1184.97	1268.61	1223.09	1306.73

(1) Cascade edge option not available in these sizes.



WUCT-WN34



WUCT-WN43

Features

- Includes worksurface.
- Wood veneer worksurface with:
 - 3mm edgeband (K) or knife edge (U) on user edge and 1mm edgeband on sides and back, or
 - Cascade (M) on user edge and 1mm edgeband on sides and back.
- Worksurfaces predrilled to accept most support options.
- Optional wireway will be Charcoal. Refer to Specification Guide for wireway details.
- Installed worksurfaces without wireway will not allow clearance for power plug.**
- Depths and widths shown in nominal dimensions.

Specification Tips

- Corner bracket is required and must be separately specified.**
- Worksurface support specific to product line and worksurface edge guidelines; must be separately specified; refer to Specification Guide for support and load.**
 - Corner bracket - REQUIRED
 - Cantilever bracket
 - Worksurface support panel
- Knife edge requires use of worksurface supports for that application; worksurface support panel and/or side brackets for use with knife edge.
- Mini cantilever brackets are for use with 18"(457mm) deep worksurfaces with knife edge only.
- Recommend the KU4A-0023-■ N or KU3A-0023-■ keyboard pad for 36"(914mm)-wide corners.

To Order, Specify:

- Product number.
- Wood finish color.

① Edge Options:

- K** Wood Edgeband
- M** Wood Cascade
- U** Wood Knife

② Core Options:

- S** Standard
- G** Green, add \$109.26 list.

③ Wireway Options:


- A** Notched
- B** Curved
- C** Without

Adaptable Worksurfaces — Wood


Corner, 90° Notched Transitional

Left/Right Depth	Width	Number	①②③	Wood Group A K	Group B K	Wood Group A M	Group B M	Wood Group A U	Group B U
18"(457mm)/24"(610mm)	36"(914mm)	WUCH-3636-W	■ ■ ■ N34	\$674.35	\$698.51	\$ 850.82	\$ 874.98	\$ 894.93	\$ 919.09
	42"(1067mm)	WUCH-4242-W	■ ■ ■ N34	787.81	815.15	985.28	1012.62	1034.64	1061.98
	48"(1219mm)	WUCH-4848-W	■ ■ ■ N34	901.27	931.79	1123.94	1154.46	1179.60	1210.12
24"(610mm)/18"(457mm)	36"(914mm)	WUCH-3636-W	■ ■ ■ N43	\$674.35	\$698.51	\$ 850.82	\$ 874.98	\$ 894.93	\$ 919.09
	42"(1067mm)	WUCH-4242-W	■ ■ ■ N43	787.81	815.15	985.28	1012.62	1034.64	1061.98
	48"(1219mm)	WUCH-4848-W	■ ■ ■ N43	901.27	931.79	1123.94	1154.46	1179.60	1210.12
24"(610mm)/30"(762mm)	36"(914mm)	(1) WUCH-3636-W	■ ■ ■ N45	\$707.96	\$732.12	N/A	N/A	928.54	952.70
	42"(1067mm)	WUCH-4242-W	■ ■ ■ N45	821.42	848.76	1018.89	1046.23	1068.25	1095.59
	48"(1219mm)	WUCH-4848-W	■ ■ ■ N45	934.88	965.40	1157.55	1188.07	1213.21	1243.73
30"(762mm)/24"(610mm)	36"(914mm)	(1) WUCH-3636-W	■ ■ ■ N54	\$707.96	\$732.12	N/A	N/A	928.54	952.70
	42"(1067mm)	WUCH-4242-W	■ ■ ■ N54	821.42	848.76	1018.89	1046.23	1068.25	1095.59
	48"(1219mm)	WUCH-4848-W	■ ■ ■ N54	934.88	965.40	1157.55	1188.07	1213.21	1243.73

(1) Cascade edge option not available in these sizes.



WUCH-WN34



WUCH-WN43

Features

- Includes worksurface and tie plate.
- Wood veneer surface with:
 - 3mm edgeband (K) or knife edge (U) on user edge and 1mm edgeband on sides and back, or
 - Cascade (M) on user edge and 1mm edgeband on sides and back.
- Worksurfaces predrilled to accept most support options.
- Optional wireways along back edges are Charcoal. Refer to Specification Guide for wireway details.
- Installed worksurfaces without wireway will not allow clearance for power plug.**
- Depths and widths shown in nominal dimensions.

Specification Tips

- Corner bracket is required and must be separately specified.**
- Worksurface support specific to product line and worksurface edge guidelines; must be separately specified; refer to Specification Guide for support and load.**
 - Corner bracket - REQUIRED
 - Cantilever bracket
 - Worksurface support panel
- Knife edge requires use of worksurface supports for that application; worksurface support panel and/or side brackets for use with knife edge.
- Mini cantilever brackets are for use with 18"(457mm) deep worksurfaces with knife edge only.
- Recommend the KU4A-0023-■ N or KU3A-0023-■ ■ keyboard pad for 36"(914mm)-wide corners.

To Order, Specify:

- Product number.
- Wood finish color.

① Edge Options:

- K** Wood Edgeband
- M** Wood Cascade
- U** Wood Knife

② Core Options:

- S** Standard
- G** Green, add \$109.26 list.


③ Wireway Options:

- A** Notched
- B** Curved
- C** Without


Adaptable Worksurfaces — Wood

Corner, 90° Angled Transitional

Left/Right Depth	Width	Number	①②③④	Wood Group A K	Group B K	Wood Group A U	Group B U
18"(457mm)/24"(610mm)	36"(914mm)	WUCF-3636-W	34	\$621.69	\$ 666.27	\$ 808.71	\$ 853.29
	42"(1067mm)	WUCF-4242-W	34	768.51	839.25	1003.32	1074.06
	48"(1219mm)	WUCF-4848-W	34	915.33	1012.23	1197.93	1294.83
24"(610mm)/18"(457mm)	36"(914mm)	WUCF-3636-W	43	\$621.69	\$ 666.27	\$ 808.71	\$ 853.29
	42"(1067mm)	WUCF-4242-W	43	768.51	839.25	1003.32	1074.06
	48"(1219mm)	WUCF-4848-W	43	915.33	1012.23	1197.93	1294.83
24"(610mm)/30"(762mm)	36"(914mm)	WUCF-3636-W	45	\$653.63	\$ 702.51	\$ 832.81	\$ 881.69
	42"(1067mm)	WUCF-4242-W	45	800.45	875.49	1027.42	1102.46
	48"(1219mm)	WUCF-4848-W	45	947.27	1048.47	1222.03	1323.23
30"(762mm)/24"(610mm)	36"(914mm)	WUCF-3636-W	54	\$653.63	\$ 702.51	\$ 832.81	\$ 881.69
	42"(1067mm)	WUCF-4242-W	54	800.45	875.49	1027.42	1102.46
	48"(1219mm)	WUCF-4848-W	54	947.27	1048.47	1222.03	1323.23



(Left-hand orientation)
WUCF-WN34



(Right-hand orientation)
WUCF-WN43

Features

- Includes worksurface and tie plate.
- Wood veneer surface with:
 - 3mm edgeband (K) or knife edge (U) on user edge and 1mm edgeband on sides and back.
- Optional wireways along back edges are Charcoal. Refer to Specification Guide for wireway details.
- Installed worksurfaces without wireway will not allow clearance for power plug.**
- Depths and widths shown in nominal dimensions.

Specification Tips

- Corner bracket is required and must be separately specified.**
- Worksurface support specific to product line and worksurface edge guidelines; must be separately specified; refer to Specification Guide for support and load.**
 - Corner bracket - REQUIRED
 - Cantilever bracket
 - Worksurface support panel
- Knife edge requires use of worksurface supports for that application; worksurface support panel and/or side brackets for use with knife edge.
- Mini cantilever brackets are for use with 18"(457mm) deep worksurfaces with knife edge only.
- Recommend the KU4A-0023-■ N or KU3A-0023-■ keyboard pad for 36"(914mm)-wide corners.
- Due to manufacturing restrictions, not available with wood Cascade edge.**

To Order, Specify:

- Product number.
- Wood finish color.

① Edge Options:

- K** Wood Edgeband
- U** Wood Knife

② Core Options:

- S** Standard
- G** Green, add \$109.26 list.

③ Wireway Options:

- A** Notched
- B** Curved
- C** Without


④ Orientation (as seated):

- R** Right-hand
- L** Left-hand

Adaptable Worksurfaces — Wood

Corner, 90° Split Top

Depth	Width	Number	①②③	Wood Group A K	Group B K	Wood Group A M	Group B M
24"(610mm)	48"(1219mm)	WUCK-4848-W	<div></div> <div></div> <div></div> N44	\$2826.90	\$3138.62	\$3573.53	\$3885.25
30"(762mm)	48"(1219mm)	WUCK-4848-W	<div></div> <div></div> <div></div> N55	\$2884.74	\$3207.17	\$3631.37	\$3953.80



WUCK-W

Features

- Includes rear worksurface, front worksurface, mechanism, and tie plate.
- Dual worksurfaces with a 1”(25mm) space between the front and rear worksurfaces. Front worksurface is 12”(305mm) deep.
- Wood veneer worksurface with:
 - 3mm edgeband (K) or Cascade (M) edge on front and rear worksurface front edge and 1mm on back and side edge of front and rear worksurface.
- Adjustable front worksurface is attached to the rear worksurface with a spring-assist mechanism.
- Front worksurface manually adjusts to any position 7”(178mm) above and 5 3/4”(146mm) below the rear worksurface.
- Front worksurface tilts -15° to +9°.
- Spring assist mechanism available in charcoal finish color only.
- Optional wireway will be Charcoal. Refer to Specification Guide for wireway details.
- Installed worksurfaces without wireway will not allow clearance for power plug.**
- Depths and widths shown in nominal dimensions.

Specification Tips

- Corner bracket is required and must be separately specified.**
- Fixed-height rear worksurface predrilled to accept standard cantilever brackets.
- Worksurface support specific to product line and worksurface edge guidelines; must be separately specified; refer to Specification Guide for support and load.**
 - Corner bracket - REQUIRED
 - Cantilever bracket
 - Worksurface support panel

To Order, Specify:

- Product number.
- Wood finish color.

① Edge Options:

- K** Wood Edgeband
- M** Wood Cascade

② Core Options:

- S** Standard
- G** Green, add \$109.26 list.


③ Wireway Options:

- A** Notched
- B** Curved
- C** Without


This page intentionally blank

Adaptable Worksurfaces — Wood

Corner, 90° Wrap-Around Extended



(Right-hand orientation)
WUCE-WR44



(Left-hand orientation)
WUCE-WL44

Features

- Includes work surface and tie plate.
- Wood veneer work surface with:
 - 3mm edgeband (K) or knife edge (U) on user edge and 1mm edgeband on sides and back, or
 - Cascade (M) on user edge and 1mm edgeband on sides and back.
- Worksurfaces predrilled to accept most support options.
- Optional wireway will be Charcoal. Refer to Specification Guide for wireway details.
- **Installed worksurfaces without wireway will not allow clearance for power plug.**
- Depths and widths shown in nominal dimensions.

Specification Tips

- **Corner bracket is required and must be separately specified.**
- **Work surface support specific to product line and work surface edge guidelines; must be separately specified; refer to Specification Guide for support and load.**
 - Corner bracket - REQUIRED
 - Cantilever bracket
 - Work surface support panel
 - Work surface support column or leg
 - Side brackets
 - Attached lower storage
- Knife edge requires use of work surface supports for that application; work surface support panel and/or side brackets for use with knife edge.
- Mini cantilever brackets are for use with 18”(457mm) deep worksurfaces with knife edge only.
- Recommend the KU4A-0023-■ N or KU3A-0023-■ keyboard pad for 36”(914mm)-wide corners.

Note: Separately specified work surface reinforcement channels provide additional support for worksurfaces with 50”(1270mm) spans that are heavily loaded and not otherwise supported by mid-span cantilevers, work surface support panels, columns, legs or attached lower storage.

To Order, Specify:

- 1) Product number.
- 2) Wood finish color.

1 Edge Options:

- K** Wood Edgeband
- M** Wood Cascade
- U** Wood Knife

2 Core Options:

- S** Standard
- G** Green, add \$109.26 list.

3 Wireway Options:

- A** Notched
- B** Curved
- C** Without

4 Orientation (as seated):

- R** Right-hand
- L** Left-hand

Adaptable Worksurfaces — Wood


Corner, 90° Wrap-Around Extended

Left/Right Depth	Width	Length	Number	①②③④	Wood Group A K	Group B K	Wood Group A M	Group B M	Wood Group A U	Group B U
18"(457mm)	36"(914mm)	42"(1067mm)	WUCE-3642-W	33	\$1162.64	\$1247.50	\$1479.82	\$1564.68	\$1485.12	\$1569.98
		48"(1219mm)	WUCE-3648-W	33	1173.01	1259.74	1498.83	1585.56	1507.79	1594.52
		54"(1372mm)	WUCE-3654-W	33	1183.38	1271.98	1517.84	1606.44	1530.46	1619.06
		60"(1524mm)	WUCE-3660-W	33	1193.75	1284.22	1536.85	1627.32	1553.13	1643.60
		66"(1676mm)	WUCE-3666-W	33	1322.93	1415.27	1674.67	1767.01	1694.61	1786.95
		72"(1829mm)	WUCE-3672-W	33	1455.29	1549.50	1815.67	1909.88	1839.27	1933.48
24"(610mm)	36"(914mm)	42"(1067mm)	WUCE-3642-W	44	\$1188.64	\$1278.24	\$1505.82	\$1595.42	\$1511.12	\$1600.72
		48"(1219mm)	WUCE-3648-W	44	1199.01	1290.48	1524.83	1616.30	1533.79	1625.26
		54"(1372mm)	WUCE-3654-W	44	1209.38	1302.72	1543.84	1637.18	1556.46	1649.80
		60"(1524mm)	WUCE-3660-W	44	1219.75	1314.96	1562.85	1658.06	1579.13	1674.34
		66"(1676mm)	WUCE-3666-W	44	1348.93	1446.01	1700.67	1797.75	1720.61	1817.69
		72"(1829mm)	WUCE-3672-W	44	1481.29	1580.24	1841.67	1940.62	1865.27	1964.22
30"(762mm)	36"(914mm)	42"(1067mm)	⁽¹⁾ WUCE-3642-W	55	\$1333.45	\$1427.79	N/A	N/A	N/A	N/A
		48"(1219mm)	⁽¹⁾ WUCE-3648-W	55	1343.82	1440.03	N/A	N/A	N/A	N/A
		54"(1372mm)	⁽¹⁾ WUCE-3654-W	55	1354.19	1452.27	N/A	N/A	N/A	N/A
		60"(1524mm)	⁽¹⁾ WUCE-3660-W	55	1364.56	1464.51	N/A	N/A	N/A	N/A
		66"(1676mm)	⁽¹⁾ WUCE-3666-W	55	1493.74	1595.56	N/A	N/A	N/A	N/A
		72"(1829mm)	⁽¹⁾ WUCE-3672-W	55	1626.10	1729.79	N/A	N/A	N/A	N/A
18"(457mm)	42"(1067mm)	48"(1219mm)	WUCE-4248-W	33	\$1183.38	\$1271.98	\$1517.84	\$1606.44	\$1530.46	\$1619.06
		54"(1372mm)	WUCE-4254-W	33	1193.75	1284.22	1536.85	1627.32	1553.13	1643.60
		60"(1524mm)	WUCE-4260-W	33	1204.12	1296.46	1555.86	1648.20	1575.80	1668.14
		66"(1676mm)	WUCE-4266-W	33	1333.30	1427.51	1693.68	1787.89	1717.28	1811.49
		72"(1829mm)	WUCE-4272-W	33	1465.66	1561.74	1834.68	1930.76	1861.94	1958.02
24"(610mm)	42"(1067mm)	48"(1219mm)	WUCE-4248-W	44	\$1209.38	\$1302.72	\$1543.84	\$1637.18	\$1556.46	\$1649.80
		54"(1372mm)	WUCE-4254-W	44	1219.75	1314.96	1562.85	1658.06	1579.13	1674.34
		60"(1524mm)	WUCE-4260-W	44	1230.12	1327.20	1581.86	1678.94	1601.80	1698.88
		66"(1676mm)	WUCE-4266-W	44	1359.30	1458.25	1719.68	1818.63	1743.28	1842.23
		72"(1829mm)	WUCE-4272-W	44	1491.66	1592.48	1860.68	1961.50	1887.94	1988.76
30"(762mm)	42"(1067mm)	48"(1067mm)	WUCE-4248-W	55	\$1354.19	\$1452.27	\$1688.65	\$1786.73	\$1701.27	\$1799.35
		54"(1372mm)	WUCE-4254-W	55	1364.56	1464.51	1707.66	1807.61	1723.94	1823.89
		60"(1524mm)	WUCE-4260-W	55	1374.93	1476.75	1726.67	1828.49	1746.61	1848.43
		66"(1676mm)	WUCE-4266-W	55	1504.11	1607.80	1864.49	1968.18	1888.09	1991.78
		72"(1829mm)	WUCE-4272-W	55	1636.47	1742.03	2005.49	2111.05	2032.75	2138.31
18"(457mm)	48"(1219mm)	54"(1372mm)	WUCE-4854-W	33	\$1204.12	\$1296.46	\$1555.86	\$1648.20	\$1575.80	\$1668.14
		60"(1524mm)	WUCE-4860-W	33	1214.49	1308.70	1574.87	1669.08	1598.47	1692.68
		66"(1676mm)	WUCE-4866-W	33	1343.67	1439.75	1712.69	1808.77	1739.95	1836.03
		72"(1829mm)	WUCE-4872-W	33	1476.03	1573.98	1853.69	1951.64	1884.61	1982.56
24"(610mm)	48"(1219mm)	54"(1372mm)	WUCE-4854-W	44	\$1230.12	\$1327.20	\$1581.86	\$1678.94	\$1601.80	\$1698.88
		60"(1524mm)	WUCE-4860-W	44	1240.49	1339.44	1600.87	1699.82	1624.47	1723.42
		66"(1676mm)	WUCE-4866-W	44	1369.67	1470.49	1738.69	1839.51	1765.95	1866.77
		72"(1829mm)	WUCE-4872-W	44	1502.03	1604.72	1879.69	1982.38	1910.61	2013.30
30"(762mm)	48"(1219mm)	54"(1372mm)	WUCE-4854-W	55	\$1374.93	\$1476.75	\$1726.67	\$1828.49	\$1746.61	\$1848.43
		60"(1524mm)	WUCE-4860-W	55	1385.30	1488.99	1745.68	1849.37	1769.28	1872.97
		66"(1676mm)	WUCE-4866-W	55	1514.48	1620.04	1883.50	1989.06	1910.76	2016.32
		72"(1829mm)	WUCE-4872-W	55	1646.84	1754.27	2024.50	2131.93	2055.42	2162.85


⁽¹⁾Cascade and knife edge option not available in these sizes.

Adaptable Worksurfaces — Wood

Corner, 90° Notched Extended



(Right-hand orientation)
WUCP-WR44



(Left-hand orientation)
WUCP-WL44

Features

- Includes worksurface and tie plate.
- Wood veneer worksurface with:
 - 3mm edgeband (K) or knife edge (U) on user edge and 1mm edgeband on sides and back, or
 - Cascade (M) on user edge and 1mm edgeband on sides and back.
- Worksurfaces predrilled to accept an adjustable keyboard and most support options.
- Optional wireways along back edges are Charcoal. Refer to Specification Guide for wireway details.
- **Installed worksurfaces without wireway will not allow clearance for power plug.**
- Depths and widths shown in nominal dimensions.

Specification Tips

- **Corner bracket is required and must be separately specified.**
- **Worksurface support specific to product line and worksurface edge guidelines; must be separately specified; refer to Specification Guide for support and load.**
 - Corner bracket - REQUIRED
 - Cantilever bracket
 - Worksurface support panel
 - Side brackets
 - Attached lower storage
 - Disc Base
 - Support post or support column
- Knife edge requires use of worksurface supports for that application; worksurface support panel and/or side brackets for use with knife edge.
- Mini cantilever brackets are for use with 18”(457mm) deep worksurfaces with knife edge only.
- Recommend the KU4A-0023-■ N or KU3A-0023-■ ■ keyboard pad for 36”(914mm)-wide corners.

Note: Separately specified worksurface reinforcement channels provide additional support for worksurfaces with 50”(1270mm) spans that are heavily loaded and not otherwise supported by mid-span cantilevers, worksurface end panels, posts or attached lower storage.

To Order, Specify:

- 1) Product number.
- 2) Wood finish color.

① Edge Options:

- K** Wood Edgeband
- M** Wood Cascade
- U** Wood Knife

② Core Options:

- S** Standard
- G** Green, add \$109.26 list.

③ Wireway Options:

- A** Notched
- B** Curved
- C** Without

④ Orientation (as seated):

- R** Right-hand
- L** Left-hand

Adaptable Worksurfaces — Wood


Corner, 90° Notched Extended

Left/Right Depth	Width	Length	Number	①②③④	Wood Group A K	Group B K	Wood Group A M	Group B M	Wood Group A U	Group B U
18"(457mm)	36"(914mm)	42"(1067mm)	WUCP-3642-W	33	\$1147.26	\$1229.74	\$1400.06	\$1482.54	\$1479.33	\$1561.81
		48"(1219mm)	WUCP-3648-W	33	\$1185.29	\$1274.53	\$1457.21	\$1546.45	\$1533.68	\$1622.92
		54"(1372mm)	WUCP-3654-W	33	\$1223.32	\$1319.32	\$1514.36	\$1610.36	\$1588.03	\$1684.03
		60"(1524mm)	WUCP-3660-W	33	\$1261.35	\$1364.11	\$1571.51	\$1674.27	\$1642.38	\$1745.14
		66"(1676mm)	WUCP-3666-W	33	\$1299.38	\$1408.90	\$1628.66	\$1738.18	\$1696.73	\$1806.25
		72"(1829mm)	WUCP-3672-W	33	\$1454.17	\$1570.45	\$1802.57	\$1918.85	\$1867.84	\$1984.12
24"(610mm)	36"(914mm)	42"(1067mm)	WUCP-3642-W	44	\$1166.48	\$1252.37	\$1419.28	\$1505.17	\$1498.55	\$1584.44
		48"(1219mm)	WUCP-3648-W	44	\$1204.51	\$1297.16	\$1476.43	\$1569.08	\$1552.90	\$1645.55
		54"(1372mm)	WUCP-3654-W	44	\$1242.54	\$1341.95	\$1533.58	\$1632.99	\$1607.25	\$1706.66
		60"(1524mm)	WUCP-3660-W	44	\$1280.57	\$1386.74	\$1590.73	\$1696.90	\$1661.60	\$1767.77
		66"(1676mm)	WUCP-3666-W	44	\$1318.60	\$1431.53	\$1647.88	\$1760.81	\$1715.95	\$1828.88
		72"(1829mm)	WUCP-3672-W	44	\$1473.39	\$1593.08	\$1821.79	\$1941.48	\$1887.06	\$2006.75
30"(762mm)	36"(914mm)	42"(1067mm)	⁽¹⁾ WUCP-3642-W	55	\$1185.70	\$1275.00	N/A	N/A	N/A	N/A
		48"(1219mm)	⁽¹⁾ WUCP-3648-W	55	\$1223.73	\$1319.79	N/A	N/A	N/A	N/A
		54"(1372mm)	⁽¹⁾ WUCP-3654-W	55	\$1261.76	\$1364.58	N/A	N/A	N/A	N/A
		60"(1524mm)	⁽¹⁾ WUCP-3660-W	55	\$1299.79	\$1409.37	N/A	N/A	N/A	N/A
		66"(1676mm)	⁽¹⁾ WUCP-3666-W	55	\$1337.82	\$1454.16	N/A	N/A	N/A	N/A
		72"(1829mm)	⁽¹⁾ WUCP-3672-W	55	\$1492.61	\$1615.71	N/A	N/A	N/A	N/A
18"(457mm)	42"(1067mm)	48"(1219mm)	WUCP-4248-W	33	\$1223.32	\$1319.32	\$1514.36	\$1610.36	\$1588.03	\$1684.03
		54"(1372mm)	WUCP-4254-W	33	\$1261.35	\$1364.11	\$1571.51	\$1674.27	\$1642.38	\$1745.14
		60"(1524mm)	WUCP-4260-W	33	\$1299.38	\$1408.90	\$1628.66	\$1738.18	\$1696.73	\$1806.25
		66"(1676mm)	WUCP-4266-W	33	\$1337.41	\$1453.69	\$1685.81	\$1802.09	\$1751.08	\$1867.36
		72"(1829mm)	WUCP-4272-W	33	\$1492.20	\$1615.24	\$1859.72	\$1982.76	\$1922.19	\$2045.23
24"(610mm)	42"(1067mm)	48"(1219mm)	WUCP-4248-W	44	\$1242.54	\$1341.95	\$1533.58	\$1632.99	\$1607.25	\$1706.66
		54"(1372mm)	WUCP-4254-W	44	\$1280.57	\$1386.74	\$1590.73	\$1696.90	\$1661.60	\$1767.77
		60"(1524mm)	WUCP-4260-W	44	\$1318.60	\$1431.53	\$1647.88	\$1760.81	\$1715.95	\$1828.88
		66"(1676mm)	WUCP-4266-W	44	\$1356.63	\$1476.32	\$1705.03	\$1824.72	\$1770.30	\$1889.99
		72"(1829mm)	WUCP-4272-W	44	\$1511.42	\$1637.87	\$1878.94	\$2005.39	\$1941.41	\$2067.86
30"(762mm)	42"(1067mm)	48"(1219mm)	WUCP-4248-W	55	\$1261.76	\$1364.58	\$1552.80	\$1655.62	\$1626.47	\$1729.29
		54"(1372mm)	WUCP-4254-W	55	\$1299.79	\$1409.37	\$1609.95	\$1719.53	\$1680.82	\$1790.40
		60"(1524mm)	WUCP-4260-W	55	\$1337.82	\$1454.16	\$1667.10	\$1783.44	\$1735.17	\$1851.51
		66"(1676mm)	WUCP-4266-W	55	\$1375.85	\$1498.95	\$1724.25	\$1847.35	\$1789.52	\$1912.62
		72"(1829mm)	WUCP-4272-W	55	\$1530.64	\$1660.50	\$1898.16	\$2028.02	\$1960.63	\$2090.49
18"(457mm)	48"(1219mm)	54"(1372mm)	WUCP-4854-W	33	\$1299.38	\$1408.90	\$1628.66	\$1738.18	\$1696.73	\$1806.25
		60"(1524mm)	WUCP-4860-W	33	\$1337.41	\$1453.69	\$1685.81	\$1802.09	\$1751.08	\$1867.36
		66"(1676mm)	WUCP-4866-W	33	\$1375.44	\$1498.48	\$1742.96	\$1866.00	\$1805.43	\$1928.47
		72"(1829mm)	WUCP-4872-W	33	\$1530.23	\$1660.03	\$1916.87	\$2046.67	\$1976.54	\$2106.34
24"(610mm)	48"(1219mm)	54"(1372mm)	WUCP-4854-W	44	\$1318.60	\$1431.53	\$1647.88	\$1760.81	\$1715.95	\$1828.88
		60"(1524mm)	WUCP-4860-W	44	\$1356.63	\$1476.32	\$1705.03	\$1824.72	\$1770.30	\$1889.99
		66"(1676mm)	WUCP-4866-W	44	\$1394.66	\$1521.11	\$1762.18	\$1888.63	\$1824.65	\$1951.10
		72"(1829mm)	WUCP-4872-W	44	\$1549.45	\$1682.66	\$1936.09	\$2069.30	\$1995.76	\$2128.97
30"(762mm)	48"(1219mm)	54"(1372mm)	WUCP-4854-W	55	\$1337.82	\$1454.16	\$1667.10	\$1783.44	\$1735.17	\$1851.51
		60"(1524mm)	WUCP-4860-W	55	\$1375.85	\$1498.95	\$1724.25	\$1847.35	\$1789.52	\$1912.62
		66"(1676mm)	WUCP-4866-W	55	\$1413.88	\$1543.74	\$1781.40	\$1911.26	\$1843.87	\$1973.73
		72"(1829mm)	WUCP-4872-W	55	\$1568.67	\$1705.29	\$1955.31	\$2091.93	\$2014.98	\$2151.60


⁽¹⁾Cascade and knife edge option not available in these sizes.

Adaptable Worksurfaces — Wood

Corner, 90° Wrap-Around Transitional Extended



(Right-hand orientation)



(Left-hand orientation)
WUCX-WL43

Features

- Includes worksurface and tie plate.
- Wood veneer worksurface with:
 - 3mm edgeband (K) or knife edge (U) on user edge and 1mm edgeband on sides and back, or
 - Cascade (M) on user edge and 1mm edgeband on sides and back.
- Worksurfaces predrilled to accept most support options.
- Optional wireway will be Charcoal. Refer to Specification Guide for wireway details.
- **Installed worksurfaces without wireway will not allow clearance for power plug.**
- Depths and widths shown in nominal dimensions.

Specification Tips

- **Corner bracket is required and must be separately specified.**
- **Worksurface support specific to product line and worksurface edge guidelines; must be separately specified; refer to Specification Guide for support and load.**
 - Corner bracket - REQUIRED
 - Cantilever bracket
 - Worksurface support panel
 - Support post or support column
 - Side brackets
 - Attached lower storage
- Knife edge requires use of worksurface supports for that application; worksurface support panel and/or side brackets for use with knife edge.
- Mini cantilever brackets are for use with 18”(457mm) deep worksurfaces with knife edge only.
- Intermediate support is required for unsupported worksurface span greater than 60”(1524mm).
- Recommend the KU4A-0023-■ N or KU3A-0023-■ ■ keyboard pad for 36”(914mm)-wide corners.

Note: Separately specified worksurface reinforcement channels provide additional support for worksurfaces with 50”(1270mm) spans that are heavily loaded and not otherwise supported by mid-span cantilevers, worksurface support panels, columns, legs or attached lower storage.

To Order, Specify:

- 1) Product number.
- 2) Wood finish color.

1 Edge Options:

- K** Wood Edgeband
- M** Wood Cascade
- U** Wood Knife

2 Core Options:

- S** Standard
- G** Green, add \$109.26 list.

3 Wireway Options:

- A** Notched
- B** Curved
- C** Without

4 Orientation (as seated):

- R** Right-hand
- L** Left-hand

Adaptable Worksurfaces — Wood

Corner, 90° Wrap-Around Transitional Extended



Left/Right Depth	Width	Length	Number	①②③④	Wood Group A K	Wood Group B K	Wood Group A M	Group B M	Group A U	Group B U
18"(457mm) /24"(66mm)	36"(914mm)	42"(1067mm)	WUCX-3642-W		\$1313.54	\$1400.77	\$1630.72	\$1717.95	\$1636.02	\$1723.25
		48"(1219mm)	WUCX-3648-W		\$1323.91	\$1413.01	\$1649.73	\$1738.83	\$1658.69	\$1747.79
		54"(1372mm)	WUCX-3654-W		\$1334.28	\$1425.25	\$1668.74	\$1759.71	\$1681.36	\$1772.33
		60"(1524mm)	WUCX-3660-W		\$1344.65	\$1437.49	\$1687.75	\$1780.59	\$1704.03	\$1796.87
		66"(1676mm)	WUCX-3666-W		\$1473.83	\$1568.54	\$1825.57	\$1920.28	\$1845.51	\$1940.22
		72"(1829mm)	WUCX-3672-W		\$1606.19	\$1702.77	\$1966.57	\$2063.15	\$1990.17	\$2086.75
24"(610mm) /18"(457mm)	36"(914mm)	42"(1067mm)	WUCX-3642-W		\$1313.54	\$1400.77	\$1630.72	\$1717.95	\$1636.02	\$1723.25
		48"(1219mm)	WUCX-3648-W		\$1323.91	\$1413.01	\$1323.91	\$1413.01	\$1658.69	\$1747.79
		54"(1372mm)	WUCX-3654-W		\$1334.28	\$1425.25	\$1668.74	\$1759.71	\$1681.36	\$1772.33
		60"(1524mm)	WUCX-3660-W		\$1344.65	\$1437.49	\$1687.75	\$1780.59	\$1704.03	\$1796.87
		66"(1676mm)	WUCX-3666-W		\$1473.83	\$1568.54	\$1825.57	\$1920.28	\$1845.51	\$1940.22
		72"(1829mm)	WUCX-3672-W		\$1606.19	\$1702.77	\$1966.57	\$2063.15	\$1990.17	\$2086.75
24"(610mm) /30"(762mm)	36"(914mm)	42"(1067mm)	⁽¹⁾ WUCX-3642-W		\$1339.54	\$1431.51	N/A	N/A	N/A	N/A
		48"(1219mm)	⁽¹⁾ WUCX-3648-W		\$1349.91	\$1443.75	N/A	N/A	N/A	N/A
		54"(1372mm)	⁽¹⁾ WUCX-3654-W		\$1360.28	\$1455.99	N/A	N/A	N/A	N/A
		60"(1524mm)	⁽¹⁾ WUCX-3660-W		\$1370.65	\$1468.23	N/A	N/A	N/A	N/A
		66"(1676mm)	⁽¹⁾ WUCX-3666-W		\$1499.83	\$1599.28	N/A	N/A	N/A	N/A
		72"(1829mm)	⁽¹⁾ WUCX-3672-W		\$1632.19	\$1733.51	N/A	N/A	N/A	N/A
30"(762mm) /24"(610mm)	36"(914mm)	42"(1067mm)	⁽¹⁾ WUCX-3642-W		\$1339.54	\$1431.51	N/A	N/A	N/A	N/A
		48"(1219mm)	⁽¹⁾ WUCX-3648-W		\$1349.91	\$1443.75	N/A	N/A	N/A	N/A
		54"(1372mm)	⁽¹⁾ WUCX-3654-W		\$1360.28	\$1455.99	N/A	N/A	N/A	N/A
		60"(1524mm)	⁽¹⁾ WUCX-3660-W		\$1370.65	\$1468.23	N/A	N/A	N/A	N/A
		66"(1676mm)	⁽¹⁾ WUCX-3666-W		\$1499.83	\$1599.28	N/A	N/A	N/A	N/A
		72"(1829mm)	⁽¹⁾ WUCX-3672-W		\$1632.19	\$1733.51	N/A	N/A	N/A	N/A
18"(457mm) /24"(610mm)	42"(1067mm)	48"(1219mm)	WUCX-4248-W		\$1334.28	\$1425.25	\$1668.74	\$1759.71	\$1681.36	\$1772.33
		54"(1372mm)	WUCX-4254-W		\$1344.65	\$1437.49	\$1687.75	\$1780.59	\$1704.03	\$1796.87
		60"(1524mm)	WUCX-4260-W		\$1355.02	\$1449.73	\$1706.76	\$1801.47	\$1726.70	\$1821.41
		66"(1676mm)	WUCX-4266-W		\$1484.20	\$1580.78	\$1844.58	\$1941.16	\$1868.18	\$1964.76
		72"(1829mm)	WUCX-4272-W		\$1616.56	\$1715.01	\$1985.58	\$2084.03	\$2012.84	\$2111.29
24"(610mm) /18"(457mm)	42"(1067mm)	48"(1219mm)	WUCX-4248-W		\$1334.28	\$1425.25	\$1668.74	\$1759.71	\$1681.36	\$1772.33
		54"(1372mm)	WUCX-4254-W		\$1344.65	\$1437.49	\$1687.75	\$1780.59	\$1704.03	\$1796.87
		60"(1524mm)	WUCX-4260-W		\$1355.02	\$1449.73	\$1706.76	\$1801.47	\$1726.70	\$1821.41
		66"(1676mm)	WUCX-4266-W		\$1484.20	\$1580.78	\$1844.58	\$1941.16	\$1868.18	\$1964.76
		72"(1829mm)	WUCX-4272-W		\$1616.56	\$1715.01	\$1985.58	\$2084.03	\$2012.84	\$2111.29
24"(610mm) /30"(762mm)	42"(1067mm)	48"(1219mm)	WUCX-4248-W		\$1360.28	\$1455.99	\$1694.74	\$1790.45	\$1707.36	\$1803.07
		54"(1372mm)	WUCX-4254-W		\$1370.65	\$1468.23	\$1713.75	\$1811.33	\$1730.03	\$1827.61
		60"(1524mm)	WUCX-4260-W		\$1381.02	\$1480.47	\$1732.76	\$1832.21	\$1752.70	\$1852.15
		66"(1676mm)	WUCX-4266-W		\$1510.20	\$1611.52	\$1870.58	\$1971.90	\$1894.18	\$1995.50
		72"(1829mm)	WUCX-4272-W		\$1642.56	\$1745.75	\$2011.58	\$2114.77	\$2038.84	\$2142.03
30"(762mm) /24"(610mm)	42"(1067mm)	48"(1067mm)	WUCX-4248-W		\$1360.28	\$1455.99	\$1694.74	\$1790.45	\$1707.36	\$1803.07
		54"(1372mm)	WUCX-4254-W		\$1370.65	\$1468.23	\$1713.75	\$1811.33	\$1730.03	\$1827.61
		60"(1524mm)	WUCX-4260-W		\$1381.02	\$1480.47	\$1732.76	\$1832.21	\$1752.70	\$1852.15
		66"(1676mm)	WUCX-4266-W		\$1510.20	\$1611.52	\$1870.58	\$1971.90	\$1894.18	\$1995.50
		72"(1829mm)	WUCX-4272-W		\$1642.56	\$1745.75	\$2011.58	\$2114.77	\$2038.84	\$2142.03
18"(457mm) /24"(610mm)	48"(1219mm)	54"(1372mm)	WUCX-4854-W		\$1355.02	\$1449.73	\$1706.76	\$1801.47	\$1726.70	\$1821.41
		60"(1524mm)	WUCX-4860-W		\$1365.39	\$1461.97	\$1725.77	\$1822.35	\$1749.37	\$1845.95
		66"(1676mm)	WUCX-4866-W		\$1494.57	\$1593.02	\$1863.59	\$1962.04	\$1890.85	\$1989.30
		72"(1829mm)	WUCX-4872-W		\$1626.93	\$1727.25	\$2004.59	\$2104.91	\$2035.51	\$2135.83
24"(610mm) /18"(457mm)	48"(1219mm)	54"(1372mm)	WUCX-4854-W		\$1355.02	\$1449.73	\$1706.76	\$1801.47	\$1726.70	\$1821.41
		60"(1524mm)	WUCX-4860-W		\$1365.39	\$1461.97	\$1725.77	\$1822.35	\$1749.37	\$1845.95
		66"(1676mm)	WUCX-4866-W		\$1494.57	\$1593.02	\$1863.59	\$1962.04	\$1890.85	\$1989.30
		72"(1829mm)	WUCX-4872-W		\$1626.93	\$1727.25	\$2004.59	\$2104.91	\$2035.51	\$2135.83
24"(610mm) /30"(762mm)	48"(1219mm)	54"(1372mm)	WUCX-4854-W		\$1381.02	\$1480.47	\$1732.76	\$1832.21	\$1752.70	\$1852.15
		60"(1524mm)	WUCX-4860-W		\$1391.39	\$1492.71	\$1751.77	\$1853.09	\$1775.37	\$1876.69
		66"(1676mm)	WUCX-4866-W		\$1520.57	\$1623.76	\$1889.59	\$1992.78	\$1916.85	\$2020.04
		72"(1829mm)	WUCX-4872-W		\$1652.93	\$1757.99	\$2030.59	\$2135.65	\$2061.51	\$2166.57
30"(762mm) /24"(610mm)	48"(1219mm)	54"(1372mm)	WUCX-4854-W		\$1381.02	\$1480.47	\$1732.76	\$1832.21	\$1752.70	\$1852.15
		60"(1524mm)	WUCX-4860-W		\$1391.39	\$1492.71	\$1751.77	\$1853.09	\$1775.37	\$1876.69
		66"(1676mm)	WUCX-4866-W		\$1520.57	\$1623.76	\$1889.59	\$1992.78	\$1916.85	\$2020.04
		72"(1829mm)	WUCX-4872-W		\$1652.93	\$1757.99	\$2030.59	\$2135.65	\$2061.51	\$2166.57

⁽¹⁾Cascade and knife edge option not available in these sizes.

Adaptable Worksurfaces — Wood

90° Merger

Depth	Width	Number	① ② ③	Wood Group A K	Group B K	Wood Group A U	Group B U
18"(457mm)	36"(914mm)	WUCQ-3636-W	■ ■ ■ N33	\$ 723.82	\$ 748.34	\$ 942.35	\$ 966.87
	42"(1067mm)	WUCQ-4242-W	■ ■ ■ N33	808.04	832.56	990.33	1014.85
	48"(1219mm)	WUCQ-4848-W	■ ■ ■ N33	940.22	964.74	1221.65	1246.17
24"(610mm)	36"(914mm)	WUCQ-3636-W	■ ■ ■ N44	\$ 743.01	\$ 767.53	\$ 961.54	\$ 986.06
	42"(1067mm)	WUCQ-4242-W	■ ■ ■ N44	827.23	851.75	1009.52	1034.04
	48"(1219mm)	WUCQ-4848-W	■ ■ ■ N44	959.41	983.93	1240.84	1265.36
30"(762mm)	36"(914mm)	WUCQ-3636-W	■ ■ ■ N55	\$ 824.02	\$ 848.54	\$1042.55	\$1067.07
	42"(1067mm)	WUCQ-4242-W	■ ■ ■ N55	908.24	932.76	1090.53	1115.05
	48"(1219mm)	WUCQ-4848-W	■ ■ ■ N55	1040.42	1064.94	1321.85	1346.37



WUCQ-WN44

Features

- Includes worksurface and tie plate.
- Wood veneer surface with:
 - 3mm edgeband (K) or knife edge (U) on user edge and 1mm edgeband on sides and back.
- Worksurfaces predrilled to accept most support options.
- Optional wireways along back edges are Charcoal. Refer to Specification Guide for wireway details.
- Installed worksurfaces without wireway will not allow clearance for power plug.**
- Depths and widths shown in nominal dimensions.

Specification Tips

- 90° Merger is suggested alternative to using two perpendicular rectangular worksurfaces.
- Corner bracket is required and must be separately specified.**
- Worksurface support specific to product line and worksurface edge guidelines; must be separately specified; refer to Specification Guide for support and load.**
 - Corner bracket - REQUIRED
 - Cantilever bracket
 - Worksurface support panel
 - Side brackets
- Knife edge requires use of worksurface supports for that application; worksurface support panel and/or side brackets for use with knife edge.
- Mini cantilever brackets are for use with 18"(457mm) deep worksurfaces with knife edge only.
- Not designed for use with adjustable keyboard pads.**
- Due to manufacturing restrictions, not available with wood Cascade edge.**

To Order, Specify:

- Product number.
- Wood finish color.
- Edge trim color.

① Edge Options:

- K** Wood Edgeband
- U** Wood Knife

② Core Options:

- S** Standard
- G** Green, add \$109.26 list.


③ Wireway Options:

- A** Notched
- B** Curved
- C** Without

Adaptable Worksurfaces — Wood

Corner, 120° Wrap-Around

Depth	Width	Number	①②③	Wood Group A K	Group B K	Wood Group A U	Group B U
18"(457mm)	36"(914mm)	WUCZ-3636-W	■ ■ ■ N33	\$ 940.36	\$1025.14	\$1231.77	\$1316.55
	42"(1067mm)	WUCZ-4242-W	■ ■ ■ N33	1076.86	1185.91	1403.13	1512.18
	48"(1219mm)	WUCZ-4848-W	■ ■ ■ N33	1213.36	1346.68	1574.49	1707.81
	54"(1372mm)	WUCZ-5454-W	■ ■ ■ N33	1349.86	1507.45	1745.85	1903.44
	60"(1524mm)	WUCZ-6060-W	■ ■ ■ N33	1486.36	1668.22	1917.21	2099.07
24"(610mm)	36"(914mm)	WUCZ-3636-W	■ ■ ■ N44	\$1025.03	\$1124.89	\$1316.44	\$1416.30
	42"(1067mm)	WUCZ-4242-W	■ ■ ■ N44	1161.53	1285.66	1487.80	1611.93
	48"(1219mm)	WUCZ-4848-W	■ ■ ■ N44	1298.03	1446.43	1659.16	1807.56
	54"(1372mm)	WUCZ-5454-W	■ ■ ■ N44	1434.53	1607.20	1830.52	2003.19
	60"(1524mm)	WUCZ-6060-W	■ ■ ■ N44	1571.03	1767.97	2001.88	2198.82
30"(762mm)	36"(914mm)	WUCZ-3636-W	■ ■ ■ N55	\$1109.70	\$1224.64	\$1401.11	\$1516.05
	42"(1067mm)	WUCZ-4242-W	■ ■ ■ N55	1246.20	1385.41	1572.47	1711.68
	48"(1219mm)	WUCZ-4848-W	■ ■ ■ N55	1382.70	1546.18	1743.83	1907.31
	54"(1372mm)	WUCZ-5454-W	■ ■ ■ N55	1519.20	1706.95	1915.19	2102.94
	60"(1524mm)	WUCZ-6060-W	■ ■ ■ N55	1655.70	1867.72	2086.55	2298.57



WUCZ-WN44

Features

- Includes worksurface and tie plate.
- Wood veneer worksurface with:
 - 3mm edgeband (K) or knife edge (U) on user edge and 1mm edgeband on sides and back.
- Worksurfaces predrilled to accept most support options.
- Optional wireway will be Charcoal. Refer to Specification Guide for wireway details.
- **Installed worksurfaces without wireway will not allow clearance for power plug.**
- Depths and widths shown in nominal dimensions.

Specification Tips

- **Corner bracket is required and must be separately specified.**
- **Worksurface support specific to product line and worksurface edge guidelines; must be separately specified; refer to Specification Guide for support and load.**
 - Rear corner bracket - REQUIRED
 - Cantilever bracket
 - Worksurface support panel
 - Side brackets
- Knife edge requires use of worksurface supports for that application; worksurface support panel and/or side brackets for use with knife edge.
- Mini cantilever brackets are for use with 18"(457mm) deep worksurfaces with knife edge only.
- Recommend the KU4A-0023-■ N or KU3A-0023-■ keyboard pad for 36"(914mm)-wide corners.
- **Due to manufacturing restrictions, not available with wood Cascade edge.**

Note: Separately specified worksurface reinforcement channels provide additional support for worksurfaces with 50"(1270mm) spans that are heavily loaded and not otherwise supported by mid-span cantilevers, worksurface support panels, columns, legs or attached lower storage.

To Order, Specify:

- 1) Product number.
- 2) Wood finish color.

① Edge Options:

- K** Wood Edgeband
- U** Wood Knife

② Core Options:

- S** Standard
- G** Green, add \$109.26 list.




③ Wireway Options:

- A** Notched
- B** Curved
- C** Without

Adaptable Worksurfaces — Wood

D-Shaped Convergent

Depth	Width	Number	①②③	Wood Group A K	Group B K	Wood Group A M	Group B M	Wood Group A U	Group B U
24"(610mm)	36"(914mm)	WURD-2436-W	■ ■ ■	\$ 718.64	\$ 752.96	\$ 893.26	\$ 927.58	\$ 941.30	\$ 975.62
	42"(1067mm)	WURD-2442-W	■ ■ ■	835.64	876.20	1040.96	1081.52	1084.80	1125.36
	48"(1219mm)	WURD-2448-W	■ ■ ■	952.64	1000.48	1200.94	1248.78	1238.90	1286.74
	54"(1372mm)	WURD-2454-W	■ ■ ■	1069.64	1122.68	1348.64	1401.68	1382.40	1435.44
	60"(1524mm)	WURD-2460-W	■ ■ ■	1186.64	1246.96	1508.62	1568.94	1536.50	1596.82
	66"(1676mm)	WURD-2466-W	■ ■ ■	1303.64	1370.20	1662.46	1729.02	1685.30	1751.86
	72"(1829mm)	WURD-2472-W	■ ■ ■	1420.64	1492.40	1810.16	1881.92	1828.80	1900.56
30"(762mm)	36"(914mm)	WURD-3036-W	■ ■ ■	\$ 837.20	\$ 871.52	\$1015.98	\$1050.30	\$1091.06	\$1125.38
	42"(1067mm)	WURD-3042-W	■ ■ ■	955.76	996.32	1165.24	1205.80	1236.12	1276.68
	48"(1219mm)	WURD-3048-W	■ ■ ■	1074.32	1122.16	1326.78	1374.62	1391.78	1439.62
	54"(1372mm)	WURD-3054-W	■ ■ ■	1192.88	1245.92	1476.04	1529.08	1536.84	1589.88
	60"(1524mm)	WURD-3060-W	■ ■ ■	1311.44	1371.76	1637.58	1697.90	1692.50	1752.82
	66"(1676mm)	WURD-3066-W	■ ■ ■	1430.00	1496.56	1792.98	1859.54	1842.86	1909.42
	72"(1829mm)	WURD-3072-W	■ ■ ■	1548.56	1620.32	1942.24	2014.00	1987.92	2059.68
36"(914mm)	36"(914mm)	WURD-3636-W	■ ■ ■	\$ 860.08	\$ 894.40	\$1045.10	\$1079.42	\$1120.18	\$1154.50
	42"(1067mm)	WURD-3642-W	■ ■ ■	980.20	1020.76	1195.92	1236.48	1266.80	1307.36
	48"(1219mm)	WURD-3648-W	■ ■ ■	1100.32	1148.16	1359.02	1406.86	1424.02	1471.86
	54"(1372mm)	WURD-3654-W	■ ■ ■	1220.44	1273.48	1509.84	1562.88	1570.64	1623.68
	60"(1524mm)	WURD-3660-W	■ ■ ■	1340.56	1400.88	1672.94	1733.26	1727.86	1788.18
	66"(1676mm)	WURD-3666-W	■ ■ ■	1460.68	1527.24	1829.90	1896.46	1879.78	1946.34
	72"(1829mm)	WURD-3672-W	■ ■ ■	1580.80	1652.56	1980.72	2052.48	2026.40	2098.16



WURD-W

Features

- Includes worksurface and tie plate.
- Wood veneer worksurface with:
 - 3mm edgeband (K) or knife edge (U) on user edge and 1mm edgeband on back (width), or
 - Cascade (M) on user edge and 1mm edgeband on back (width).
- Worksurfaces predrilled to accept most support options.
- Optional wireway will be Charcoal. Refer to Specification Guide for wireway details.
- Installed worksurfaces without wireway will not allow clearance for power plug.**
- Must be attached to a panel or face of a straight worksurface.
- Depths and widths shown in nominal dimensions.

Specification Tips

- Worksurface support specific to product line and worksurface edge guidelines; must be separately specified; refer to Specification Guide for support and load.**
 - Worksurface support post or column
 - Attached lower storage
- In addition to the required floor support, separately specify the appropriate support options. Select one or more of the following:
 - Cantilever bracket
 - Worksurface support panel
 - Flush mount plates
- Knife edge requires use of worksurface supports for that application; worksurface support panel and/or side brackets for use with knife edge.
- For aesthetic reasons, when using Cascade edge option, consider specifying D-Shaped Convergent Wrap-Around.

Note: Separately specified worksurface reinforcement channels provide additional support for worksurfaces with 50"(1270mm) spans that are heavily loaded and not otherwise supported by mid-span cantilevers, worksurface support panels, columns, legs or attached lower storage.

To Order, Specify:

- Product number.
- Wood finish color.

① Edge Options:

- K** Wood Edgeband
- M** Wood Cascade
- U** Wood Knife

② Core Options:

- S** Standard
- G** Green, add \$109.26 list.



③ Wireway Options:

- A** Notched
- B** Curved
- C** Without

Adaptable Worksurfaces — Wood

Rectangular Convergent

Depth	Width	Number	①②③	Wood Group A K	Group B K	Wood Group A M	Group B M	Wood Group A U	Group B U
24"(610mm)	36"(914mm)	WURV-2436-W		\$ 697.84	\$ 732.16	\$ 871.52	\$ 905.84	\$ 918.94	\$ 953.26
	42"(1067mm)	WURV-2442-W		762.76	801.46	962.44	1001.14	1002.56	1041.26
	48"(1219mm)	WURV-2448-W		827.68	871.49	1063.76	1107.57	1093.66	1137.47
	54"(1372mm)	WURV-2454-W		892.60	940.06	1154.68	1202.14	1177.28	1224.74
	60"(1524mm)	WURV-2460-W		957.52	1010.09	1256.00	1308.57	1268.38	1320.95
	66"(1676mm)	WURV-2466-W		1022.44	1079.39	1352.12	1409.07	1355.74	1412.69
	72"(1829mm)	WURV-2472-W		1087.36	1147.96	1443.04	1503.64	1439.36	1499.96
30"(762mm)	36"(914mm)	WURV-3036-W		\$ 774.80	\$ 809.12	\$ 952.64	\$ 986.96	\$1027.10	\$1061.42
	42"(1067mm)	WURV-3042-W		849.68	888.38	1053.52	1092.22	1120.68	1159.38
	48"(1219mm)	WURV-3048-W		924.56	968.37	1164.80	1208.61	1221.74	1265.55
	54"(1372mm)	WURV-3054-W		999.44	1046.90	1265.68	1313.14	1315.32	1362.78
	60"(1524mm)	WURV-3060-W		1074.32	1126.89	1376.96	1429.53	1416.38	1468.95
	66"(1676mm)	WURV-3066-W		1149.20	1206.15	1483.04	1539.99	1513.70	1570.65
	72"(1829mm)	WURV-3072-W		1224.08	1284.68	1583.92	1644.52	1607.28	1667.88
36"(914mm)	36"(914mm)	WURV-3636-W		\$ 829.92	\$ 864.24	\$1014.00	\$1048.32	\$1088.46	\$1122.78
	42"(1067mm)	WURV-3642-W		938.52	977.22	1148.60	1187.30	1215.76	1254.46
	48"(1219mm)	WURV-3648-W		1047.12	1090.93	1293.60	1337.41	1350.54	1394.35
	54"(1372mm)	WURV-3654-W		1155.72	1203.18	1428.20	1475.66	1477.84	1525.30
	60"(1524mm)	WURV-3660-W		1264.32	1316.89	1573.20	1625.77	1612.62	1665.19
	66"(1676mm)	WURV-3666-W		1372.92	1429.87	1713.00	1769.95	1743.66	1800.61
	72"(1829mm)	WURV-3672-W		1481.52	1542.12	1847.60	1908.20	1870.96	1931.56

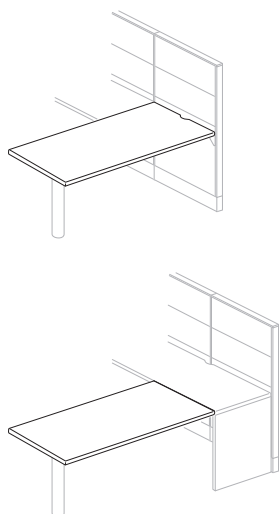

WURV-W

Features

- Wood veneer worksurface:
 - 3mm edgeband (K) or knife edge (U) on user edges and 1mm edgeband on front and back (width), or
 - Cascade (M) on user edges and 1mm edgeband on front and back (width).
- **Must be attached to a panel or face of a straight worksurface.**
- Worksurfaces predrilled to accept most support options.
- Optional wireway will be Charcoal. Refer to Specification Guide for wireway details.
- **Installed worksurfaces without wireway will not allow clearance for power plug.**
- Depths and widths shown in nominal dimensions.

Specification Tips

- **Worksurface support specific to product line and worksurface edge guidelines; must be separately specified; refer to Specification Guide for support and load.**
 - Worksurface support post or column
 - Attached lower storage
- In addition to the required floor support, separately specify the appropriate support options. Select one or more of the following:
 - Cantilever bracket
 - Worksurface support panel
 - Flush mount plates
- Knife edge requires use of worksurface supports for that application; worksurface support panel and/or side brackets for use with knife edge.
- For aesthetic reasons, when using Cascade edge or edgeband edge option, consider specifying D-Shaped Convergent Wrap-Around.

Note: Separately specified worksurface reinforcement channels provide additional support for worksurfaces with 50"(1270mm) spans that are heavily loaded and not otherwise supported by mid-span cantilevers, worksurface support panels, columns, legs or attached lower storage.

To Order, Specify:

- 1) Product number.
- 2) Wood finish color.

① Edge Options:

- K** Wood Edgeband
- M** Wood Cascade
- U** Wood Knife

② Core Options:

- S** Standard
- G** Green, add \$109.26 list.



③ Wireway Options:

- A** Notched
- B** Curved
- C** Without


Adaptable Worksurfaces — Wood

D-Shaped Convergent, Wrap-Around

Depth	Width	Length	Number	①②③④	Wood Group A K	Group B K	Wood Group A M	Group B M	Wood Group A U	Group B U
18"(457mm)	36"(914mm)	60"(1524mm)	WUCD-3660-W	3	\$1339.51	\$1447.14	\$1685.03	\$1792.66	\$1616.73	\$1724.36
		66"(1676mm)	WUCD-3666-W	3	\$1392.25	\$1509.24	\$1752.53	\$1869.52	\$1684.89	\$1801.88
		72"(1829mm)	WUCD-3672-W	3	\$1498.55	\$1624.90	\$1873.59	\$1999.94	\$1806.61	\$1932.96
24"(610mm)	36"(914mm)	60"(1524mm)	WUCD-3660-W	4	\$1355.14	\$1465.41	\$1700.03	\$1810.30	\$1631.51	\$1741.78
		66"(1676mm)	WUCD-3666-W	4	\$1407.88	\$1527.51	\$1767.53	\$1887.16	\$1699.67	\$1819.30
		72"(1829mm)	WUCD-3672-W	4	\$1514.18	\$1643.17	\$1888.59	\$2017.58	\$1821.39	\$1950.38
30"(762mm)	36"(914mm)	60"(1524mm)	WUCD-3660-W	5	\$1370.77	\$1483.68	\$1715.03	\$1827.94	\$1646.29	\$1759.20
		66"(1676mm)	WUCD-3666-W	5	\$1423.51	\$1545.78	\$1782.53	\$1904.80	\$1714.45	\$1836.72
		72"(1829mm)	WUCD-3672-W	5	\$1529.81	\$1661.44	\$1903.59	\$2035.22	\$1836.17	\$1967.80
18"(457mm)	42"(1067mm)	60"(1524mm)	WUCD-4260-W	3	\$1407.88	\$1527.51	\$1767.53	\$1887.16	\$1699.67	\$1819.30
		66"(1676mm)	WUCD-4266-W	3	\$1460.62	\$1589.61	\$1835.03	\$1964.02	\$1767.83	\$1896.82
		72"(1829mm)	WUCD-4272-W	3	\$1513.36	\$1651.71	\$1902.53	\$2040.88	\$1835.99	\$1974.34
24"(610mm)	42"(1067mm)	60"(1524mm)	WUCD-4260-W	4	\$1423.51	\$1545.78	\$1782.53	\$1904.80	\$1714.45	\$1836.72
		66"(1676mm)	WUCD-4266-W	4	\$1476.25	\$1607.88	\$1850.03	\$1981.66	\$1782.61	\$1914.24
		72"(1829mm)	WUCD-4272-W	4	\$1528.99	\$1669.98	\$1917.53	\$2058.52	\$1850.77	\$1991.76
30"(762mm)	42"(1067mm)	60"(1524mm)	WUCD-4260-W	5	\$1439.14	\$1564.05	\$1797.53	\$1922.44	\$1729.23	\$1854.14
		66"(1676mm)	WUCD-4266-W	5	\$1491.88	\$1626.15	\$1865.03	\$1999.30	\$1797.39	\$1931.66
		72"(1829mm)	WUCD-4272-W	5	\$1544.62	\$1688.25	\$1932.53	\$2076.16	\$1865.55	\$2009.18
18"(457mm)	48"(1219mm)	60"(1524mm)	WUCD-4860-W	3	\$1460.62	\$1589.61	\$1835.03	\$1964.02	\$1767.83	\$1896.82
		66"(1676mm)	WUCD-4866-W	3	\$1513.36	\$1651.71	\$1902.53	\$2040.88	\$1835.99	\$1974.34
		72"(1829mm)	WUCD-4872-W	3	\$1566.10	\$1713.81	\$1970.03	\$2117.74	\$1904.15	\$2051.86
24"(610mm)	48"(1219mm)	60"(1524mm)	WUCD-4860-W	4	\$1476.25	\$1607.88	\$1850.03	\$1981.66	\$1782.61	\$1914.24
		66"(1676mm)	WUCD-4866-W	4	\$1528.99	\$1669.98	\$1917.53	\$2058.52	\$1850.77	\$1991.76
		72"(1829mm)	WUCD-4872-W	4	\$1581.73	\$1732.08	\$1985.03	\$2135.38	\$1918.93	\$2069.28
30"(762mm)	48"(1219mm)	60"(1524mm)	WUCD-4860-W	5	\$1491.88	\$1626.15	\$1865.03	\$1999.30	\$1797.39	\$1931.66
		66"(1676mm)	WUCD-4866-W	5	\$1544.62	\$1688.25	\$1932.53	\$2076.16	\$1865.55	\$2009.18
		72"(1829mm)	WUCD-4872-W	5	\$1597.36	\$1750.35	\$2000.03	\$2153.02	\$1933.71	\$2086.70



(Right-hand orientation)



(Left-hand orientation)

WUCD-W

Features

- Includes work surface and tie plate.
- Wood veneer work surface:
 - 3mm edgeband (K) or knife edge (U) on user edge and 1mm edgeband on side and back (width), or
 - Cascade (M) on user edge and 1mm edgeband on side and back (width).
- Worksurfaces predrilled to accept most support options.
- Optional wireway will be Charcoal. Refer to Specification Guide for wireway details.
- Installed worksurfaces without wireway will not allow clearance for power plug.**
- 36"(914mm)-wide surfaces have a 24"(610mm) diameter D-shaped radius.
- 42"(1067mm)- to 60"(1524mm)-wide surfaces have a 30"(762mm) diameter D-shaped radius.
- Depths and widths shown in nominal dimensions.

Specification Tips

- Work surface support specific to product line and work surface edge guidelines; must be separately specified; refer to Specification Guide for support and load.**
 - Work surface support post or column
 - 21"(533mm) adjustable height disc base
 - Attached lower storage
- In addition to the required floor support, separately specify the appropriate support options. Select one or more of the following:
 - Cantilever bracket
 - Work surface support panel
 - Side bracket
- Knife edge requires use of work surface supports for that application; work surface support panel and/or side brackets for use with knife edge.
- Mini cantilever brackets are for use with 18"(457mm) deep work surfaces with knife edge only.
- Recommend the KU4A-0023-■ N or KU3A-0023-■ keyboard pad for 36"(914mm)-wide corners.

Note: Separately specified work surface reinforcement channels provide additional support for work surfaces with 50"(1270mm) spans that are heavily loaded and not otherwise supported by mid-span cantilevers, work surface support panels, columns, legs or attached lower storage.

To Order, Specify:

- Product number.
- Wood finish color.

① Edge Options:

- K** Wood Edgeband
- M** Wood Cascade
- U** Wood Knife

② Core Options:

- S** Standard
- G** Green, add \$109.26 list.

③ Wireway Options:

- A** Notched
- B** Curved
- C** Without



④ Orientation (as seated):

- R** Right-hand
- L** Left-hand

Adaptable Worksurfaces — Wood

D-Shaped Ender

Depth	Width	Number	① ②	Wood Group A K	Group B K	Wood Group A M	Group B M	Wood Group A U	Group B U
18"(457mm)	36"(914mm)	WUDD-1836-W	C	\$ 661.87	\$ 696.71	\$ 828.65	\$ 863.49	\$ 869.83	\$ 904.67
	42"(1067mm)	WUDD-1842-W	C	769.57	810.77	968.03	1009.23	1009.21	1050.41
	48"(1219mm)	WUDD-1848-W	C	877.27	924.83	1107.41	1154.97	1148.59	1196.15
	54"(1372mm)	WUDD-1854-W	C	984.97	1038.89	1246.79	1300.71	1287.97	1341.89
	60"(1524mm)	WUDD-1860-W	C	1092.67	1152.95	1386.17	1446.45	1427.35	1487.63
	66"(1676mm)	WUDD-1866-W	C	1200.37	1267.01	1525.55	1592.19	1566.73	1633.37
	72"(1829mm)	WUDD-1872-W	C	1308.07	1381.07	1664.93	1737.93	1706.11	1779.11
24"(610mm)	36"(914mm)	WUDD-2436-W	C	\$ 698.82	\$ 733.66	\$ 869.83	\$ 904.67	\$ 919.45	\$ 954.29
	42"(1067mm)	WUDD-2442-W	C	819.18	860.38	1021.87	1063.07	1071.49	1112.69
	48"(1219mm)	WUDD-2448-W	C	939.54	987.10	1173.91	1221.47	1223.53	1271.09
	54"(1372mm)	WUDD-2454-W	C	1059.90	1113.82	1325.95	1379.87	1375.57	1429.49
	60"(1524mm)	WUDD-2460-W	C	1180.26	1240.54	1477.99	1538.27	1527.61	1587.89
	66"(1676mm)	WUDD-2466-W	C	1300.62	1367.26	1630.03	1696.67	1679.65	1746.29
	72"(1829mm)	WUDD-2472-W	C	1420.98	1493.98	1782.07	1855.07	1831.69	1904.69
30"(762mm)	36"(914mm)	WUDD-3036-W	C	\$ 796.99	\$ 831.83	\$ 972.22	\$1007.06	\$1049.28	\$1084.12
	42"(1067mm)	WUDD-3042-W	C	917.35	958.55	1124.26	1165.46	1201.32	1242.52
	48"(1219mm)	WUDD-3048-W	C	1037.71	1085.27	1276.30	1323.86	1353.36	1400.92
	54"(1372mm)	WUDD-3054-W	C	1158.07	1211.99	1428.34	1482.26	1505.40	1559.32
	60"(1524mm)	WUDD-3060-W	C	1278.43	1338.71	1580.38	1640.66	1657.44	1717.72
	66"(1676mm)	WUDD-3066-W	C	1398.79	1465.43	1732.42	1799.06	1809.48	1876.12
	72"(1829mm)	WUDD-3072-W	C	1519.15	1592.15	1884.46	1957.46	1961.52	2034.52



Features

- Includes worksurface and tie plate.
- Wood veneer worksurface with:
 - 3mm edgeband (K) or knife edge (U) on user edge and 1mm edgeband on back (width), or
 - Cascade (M) on user edge and 1mm edgeband on back (width).
- Worksurfaces predrilled to accept most support options.
- Must be attached to the depth of adjoining worksurface.**
- Depths and widths shown in nominal dimensions.

Specification Tips

- Worksurface support specific to product line and worksurface edge guidelines; must be separately specified; refer to Specification Guide for support and load.**
 - Worksurface support post or column
 - 21"(533mm) adjustable height disc base
 - Attached lower storage
- In addition to the required floor support, separately specify the appropriate support options. Select one or more of the following:
 - Shared cantilever bracket
 - Worksurface support panel
 - Flush mount plate
- For aesthetic reasons, when using Cascade edge option, consider specifying D-Shaped Convergent Wrap-Around.

Note: Separately specified worksurface reinforcement channels provide additional support for worksurfaces with 50"(1270mm) spans that are heavily loaded and not otherwise supported by mid-span cantilevers, worksurface support panels, columns, legs or attached lower storage.

To Order, Specify:

- Product number.
- Wood finish color.

① Edge Options:


- K** Wood Edgeband
- M** Wood Cascade
- U** Wood Knife

② Core Options:


- S** Standard
- G** Green, add \$109.26 list.

Adaptable Worksurfaces — Wood
Bent

Left/Right Depth	Width	Length	Number	①②③	Wood Group A K	Group B K	Wood Group A M	Group B M	Wood Group A U	Group B U
24"(610mm)/ 30"(762mm)	24"(610mm)	36"(914mm)	WUCB-2436-W	<div><div></div><div></div><div></div></div> R45	\$ 999.91	\$1073.47	\$1248.29	\$1321.85	\$1297.33	\$1370.89
		42"(1067mm)	WUCB-2442-W	<div><div></div><div></div><div></div></div> R45	1089.17	1178.63	1365.52	1365.52	1417.10	1417.10
		48"(1219mm)	WUCB-2448-W	<div><div></div><div></div><div></div></div> R45	1338.33	1443.69	1642.65	1748.01	1696.77	1802.13
		60"(1524mm)	WUCB-2460-W	<div><div></div><div></div><div></div></div> R45	1570.15	1707.31	1930.41	2067.57	1989.61	2126.77
24"(610mm)/ 30"(762mm)	30"(762mm)	36"(914mm)	WUCB-3036-W	<div><div></div><div></div><div></div></div> R45	\$1089.17	\$1178.63	\$1365.52	\$1454.98	\$1417.10	\$1506.56
		42"(1067mm)	WUCB-3042-W	<div><div></div><div></div><div></div></div> R45	1178.43	1283.79	1482.75	1588.11	1536.87	1642.23
		48"(1219mm)	WUCB-3048-W	<div><div></div><div></div><div></div></div> R45	1427.59	1548.85	1759.88	1881.14	1816.54	1937.80
		60"(1524mm)	WUCB-3060-W	<div><div></div><div></div><div></div></div> R45	1659.41	1812.47	2047.64	2200.70	2109.38	2262.44
30"(762mm)/ 24"(610mm)	24"(610mm)	36"(914mm)	WUCB-2436-W	<div><div></div><div></div><div></div></div> L54	\$ 999.91	\$1073.47	\$1248.29	\$1321.85	\$1297.33	\$1370.89
		42"(1067mm)	WUCB-2442-W	<div><div></div><div></div><div></div></div> L54	1089.17	1178.63	1365.52	1454.98	1417.10	1506.56
		48"(1219mm)	WUCB-2448-W	<div><div></div><div></div><div></div></div> L54	1338.33	1443.69	1642.65	1748.01	1696.77	1802.13
		60"(1524mm)	WUCB-2460-W	<div><div></div><div></div><div></div></div> L54	1570.15	1707.31	1930.41	2067.57	1989.61	2126.77
30"(762mm)/ 24"(610mm)	30"(762mm)	36"(914mm)	WUCB-3036-W	<div><div></div><div></div><div></div></div> L54	\$1089.17	\$1178.63	\$1365.52	\$1454.98	\$1417.10	\$1506.56
		42"(1067mm)	WUCB-3042-W	<div><div></div><div></div><div></div></div> L54	1178.43	1283.79	1482.75	1588.11	1536.87	1642.23
		48"(1219mm)	WUCB-3048-W	<div><div></div><div></div><div></div></div> L54	1427.59	1548.85	1759.88	1881.14	1816.54	1937.80
		60"(1524mm)	WUCB-3060-W	<div><div></div><div></div><div></div></div> L54	1659.41	1812.47	2047.64	2200.70	2109.38	2262.44



(Right-hand orientation)
WUCB-WR45



(Left-hand orientation)
WUCB-WL54

Features

- Includes worksurface and tie plate.
- Wood veneer worksurface with:
 - 3mm edgeband (K) or knife edge (U) on user edge and 1mm edgeband on back (width), or
 - Cascade (M) on user edge and 1mm edgeband on back (width).
- Worksurfaces predrilled to accept most support options.
- Optional wireway along back edge is Charcoal. Refer to Specification Guide for wireway details.
- **Installed worksurfaces without wireway will not allow clearance for power plug.**
- Depths and widths shown in nominal dimensions.

Specification Tips

- **Corner bracket is required and must be separately specified.**
- **Worksurface support specific to product line and worksurface edge guidelines; must be separately specified; refer to Specification Guide for support and load.**
 - Cantilever bracket
 - Corner bracket - REQUIRED
 - Worksurface support column or leg.
- In addition to the required floor support, separately specify the appropriate support options. Select one or more of the following:
 - Shared cantilever bracket
 - Worksurface support panel
- Knife edge requires use of worksurface supports for that application; worksurface support panel and/or side brackets for use with knife edge.

Note: Separately specified worksurface reinforcement channels provide additional support for worksurfaces with 50"(1270mm) spans that are heavily loaded and not otherwise supported by mid-span cantilevers, worksurface end panels, posts or attached lower storage.

To Order, Specify:

- 1) Product number.
- 2) Wood finish color.

① Edge Options:

- K** Wood Edgeband
- M** Wood Cascade
- U** Wood Knife

② Core Options:

- S** Standard
- G** Green, add \$109.26 list.


③ Wireway Options:

- A** Notched
- B** Curved
- C** Without

Adaptable Worksurfaces — Wood

Countertop

Depth	Width	Number	①②	Wood Group A K	Group B K	Wood Group A M	Group B M	Wood Group A U	Group B U
12"(305mm)	21"(533mm)	WUTS-1221-W	C	\$497.82	\$ 517.00	\$ 622.07	\$ 641.25	\$ 662.19	\$ 681.37
	23"(584mm)	WUTS-1223-W	C	506.88	527.64	633.43	654.19	673.69	694.45
	24"(610mm)	WUTS-1224-W	C	511.41	532.96	639.11	660.66	679.44	700.99
	27"(686mm)	WUTS-1227-W	C	525.00	548.92	656.15	680.07	696.69	720.61
	29"(737mm)	WUTS-1229-W	C	534.06	559.56	667.51	693.01	708.19	733.69
	30"(762mm)	WUTS-1230-W	C	538.59	564.88	673.19	699.48	713.94	740.23
	33"(838mm)	WUTS-1233-W	C	552.18	580.84	690.23	718.89	731.19	759.85
	35"(889mm)	WUTS-1235-W	C	561.24	591.48	701.59	731.83	742.69	772.93
	36"(914mm)	WUTS-1236-W	C	565.77	596.80	707.27	738.30	748.44	779.47
	39"(991mm)	WUTS-1239-W	C	579.36	612.76	724.31	757.71	765.69	799.09
	41"(1041mm)	WUTS-1241-W	C	588.42	623.40	735.67	770.65	777.19	812.17
	42"(1067mm)	WUTS-1242-W	C	592.95	628.72	741.35	777.12	782.94	818.71
	45"(1143mm)	WUTS-1245-W	C	606.54	644.68	758.39	796.53	800.19	838.33
	47"(1194mm)	WUTS-1247-W	C	615.60	655.32	769.75	809.47	811.69	851.41
	48"(1219mm)	WUTS-1248-W	C	620.13	660.64	775.43	815.94	817.44	857.95
	51"(1295mm)	WUTS-1251-W	C	633.72	676.60	792.47	835.35	834.69	877.57
	53"(1346mm)	WUTS-1253-W	C	642.78	687.24	803.83	848.29	846.19	890.65
	54"(1372mm)	WUTS-1254-W	C	647.31	692.56	809.51	854.76	851.94	897.19
	57"(1448mm)	WUTS-1257-W	C	660.90	708.52	826.55	874.17	869.19	916.81
	59"(1499mm)	WUTS-1259-W	C	669.96	719.16	837.91	887.11	880.69	929.89
	60"(1524mm)	WUTS-1260-W	C	674.49	724.48	843.59	893.58	886.44	936.43
	63"(1600mm)	WUTS-1263-W	C	688.08	740.44	860.63	912.99	903.69	956.05
	65"(1651mm)	WUTS-1265-W	C	697.14	751.08	871.99	925.93	915.19	969.13
	66"(1676mm)	WUTS-1266-W	C	701.67	756.40	877.67	932.40	920.94	975.67
	69"(1753mm)	WUTS-1269-W	C	715.26	772.36	894.71	951.81	938.19	995.29
	71"(1803mm)	WUTS-1271-W	C	724.32	783.00	906.07	964.75	949.69	1008.37
	72"(1829mm)	WUTS-1272-W	C	728.85	788.32	911.75	971.22	955.44	1014.91
	75"(1905mm)	WUTS-1275-W	C	742.44	804.28	928.79	990.63	972.69	1034.53
	77"(1956mm)	WUTS-1277-W	C	751.50	814.92	940.15	1003.57	984.19	1047.61
	78"(1981mm)	WUTS-1278-W	C	756.03	820.24	945.83	1010.04	989.94	1054.15
	81"(2057mm)	WUTS-1281-W	C	769.62	836.20	962.87	1029.45	1007.19	1073.77
	83"(2108mm)	WUTS-1283-W	C	778.68	846.84	974.23	1042.39	1018.69	1086.85
	84"(2134mm)	WUTS-1284-W	C	783.21	852.16	979.91	1048.86	1024.44	1093.39
	87"(2210mm)	WUTS-1287-W	C	796.80	868.12	996.95	1068.27	1041.69	1113.01
	89"(2261mm)	WUTS-1289-W	C	805.86	878.76	1008.31	1081.21	1053.19	1126.09
	90"(2286mm)	WUTS-1290-W	C	810.39	884.08	1013.99	1087.68	1058.94	1132.63
	93"(2362mm)	WUTS-1293-W	C	823.98	900.04	1031.03	1107.09	1076.19	1152.25
	95"(2413mm)	WUTS-1295-W	C	833.04	910.68	1042.39	1120.03	1087.69	1165.33
	96"(2438mm)	WUTS-1296-W	C	837.57	916.00	1048.07	1126.50	1093.44	1171.87
	99"(2515mm)	WUTS-1299-W	C	851.16	931.96	1065.11	1145.91	1110.69	1191.49
	101"(2565mm)	WUTS-12A1-W	C	860.22	942.60	1076.47	1158.85	1122.19	1204.57
	102"(2591mm)	WUTS-12A2-W	C	864.75	947.92	1082.15	1165.32	1127.94	1211.11
	105"(2667mm)	WUTS-12A5-W	C	878.34	963.88	1099.19	1184.73	1145.19	1230.73
	107"(2718mm)	WUTS-12A7-W	C	887.40	974.52	1110.55	1197.67	1156.69	1243.81
	108"(2743mm)	WUTS-12A8-W	C	891.93	979.84	1116.23	1204.14	1162.44	1250.35
	111"(2819mm)	WUTS-12B1-W	C	905.52	995.80	1133.27	1223.55	1179.69	1269.97
	113"(2870mm)	WUTS-12B3-W	C	914.58	1006.44	1144.63	1236.49	1191.19	1283.05
	114"(2896mm)	WUTS-12B4-W	C	919.11	1011.76	1150.31	1242.96	1196.94	1289.59
	117"(2972mm)	WUTS-12B7-W	C	932.70	1027.72	1167.35	1262.37	1214.19	1309.21
	119"(3023mm)	WUTS-12B9-W	C	941.76	1038.36	1178.71	1275.31	1225.69	1322.29
	120"(3048mm)	WUTS-12C0-W	C	946.29	1043.68	1184.39	1281.78	1231.44	1328.83



WUTS-W

Features

- Includes countertop and tie plate.
- Wood veneer surface with:
 - 3mm edgeband (K) or knife edge (U) on user edges and 1mm edgeband on ends, or
 - Cascade (M) user edges and 1mm edgeband on ends.
- Widths shown in nominal dimensions.

Specification Tips

- **Requires separately specified mounting hardware.**
- For installation on panels 42"(1067mm)-high or higher.
- Knife edge requires use of worksurface supports for that application; worksurface support panel and/or side brackets for use with knife edge.
- Countertop support specific to product line; must be separately specified.
- Knife edge countertops not for use with PREMISE Monolithic Panel.

To Order, Specify:

- 1) Product number.
- 2) Wood finish color.

① Edge Options:

- K** Wood Edgeband
- M** Wood Cascade
- U** Wood Knife


② Core Options:

- S** Standard
- G** Green, add **\$109.26** list.

Adaptable Worksurfaces — Wood

Conference End

Depth	Width	Number	123	Wood Group A K	Group B K	Wood Group A M	Group B M	Wood Group A U	Group B U
39"(991mm)	30"(762mm)	WUDC-3930-W		\$1588.34	\$1672.56	\$1975.30	\$2059.52	\$2035.00	\$2119.22
51"(1295mm)		WUDC-5130-W		1681.42	1782.02	2093.86	2194.46	2154.73	2255.33
63"(1600mm)		WUDC-6330-W		1767.34	1883.06	2203.30	2319.02	2265.25	2380.97

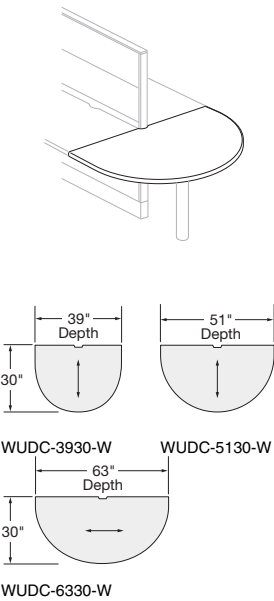

Features

- Includes workspace and tie plate.
- Wood veneer workspace with:
 - 3mm edgeband (K) or knife edge (U) on user edge and 1mm edgeband on back, or
 - Cascade (M) user edge and 1mm edgeband on back.
- Worksurfaces predrilled to accept most support options.
- Optional wireway must be specified to accommodate panel end-of-run trim.
- Optional wireway will be Charcoal. Refer to Specification Guide for wireway details.
- Depths and widths shown in nominal dimensions.

Specification Tips

- **Workspace support specific to product line and workspace edge guidelines; must be separately specified; refer to Specification Guide for support and load.**
 - Cantilever bracket
 - Side brackets
 - Workspace support column or leg – REQUIRED.
 - Workspace support panel
- Knife edge requires use of workspace supports for that application; workspace support panel and/or side brackets for use with knife edge.
- Mini cantilever brackets are for use with 18"(457mm) deep workspaces with knife edge only.
- Must be specified with notched or curved wireway to fit around end of run trim.

Note: Grain direction will run across 63"(1600mm)-wide conference end workspace.

To Order, Specify:

- 1) Product number.
- 2) Wood finish color.

1 Edge Options:

- K** Wood Edgeband
- M** Wood Cascade
- U** Wood Knife

2 Core Options:

- S** Standard
- G** Green, add \$109.26 list.



3 Wireway Options:

- A** Notched
- B** Curved


Adaptable Worksurfaces — Wood

Key Conference End

Depth	Width	Number	①②③	Wood	Group B	Wood	Group B	Wood	Group B
				Group A	K	Group A	M	Group A	U
39"(991mm)	30"(762mm)	WURY-3930-W		\$1976.36	\$2116.01	\$2514.70	\$2654.35	\$2546.68	\$2686.33
51"(1295mm)	30"(762mm)	WURY-5130-W		\$1979.99	\$2120.27	\$2576.54	\$2716.82	\$2550.31	\$2690.59
	36"(914mm)	WURY-5136-W		\$2026.47	\$2175.07	\$2628.36	\$2776.96	\$2610.33	\$2758.93
63"(1600mm)	36"(914mm)	WURY-6336-W		\$2030.10	\$2179.33	\$2690.20	\$2839.43	\$2613.96	\$2763.19
	42"(1067mm)	WURY-6342-W		\$2076.58	\$2234.13	\$2742.02	\$2899.57	\$2673.98	\$2831.53
	48"(1219mm)	WURY-6348-W		\$2123.06	\$2288.93	\$2793.84	\$2959.71	\$2734.00	\$2899.87




WURY-3930-W



WURY-5130-W

WURY-5136-W



WURY-6336-W

WURY-6342-W

WURY-6348-W

Features

- Includes worksurface and tie plate.
- Wood veneer worksurface with:
 - 3mm edgeband (K) or knife edge (U) on user edge and 1mm edgeband on back, or
 - Cascade (M) user edge and 1mm edgeband on back.
- Worksurfaces predrilled to accept most support options.
- Wireway along back edge is Charcoal. Refer to Specification Guide for wireway details.
- Depths and widths shown in nominal dimensions.
- Wireway required to accommodate end of run trim.

Specification Tips

- Worksurface support specific to product line and worksurface edge guidelines; must be separately specified; refer to Specification Guide for support and load.**
 - Cantilever bracket
 - Side brackets
 - Worksurface support column or leg – REQUIRED.
 - Worksurface support panel
- To be used in conference end application.
- Must be specified with notched or curved wireway to fit around end of run trim.
- Knife edge requires use of worksurface supports for that application; worksurface support panel and/or side brackets for use with knife edge.
- Mini cantilever brackets are for use with 18"(457mm) deep worksurfaces with knife edge only.

To Order, Specify:

- Product number.
- Wood finish color.

① Edge Options:

- K** Wood Edgeband
- M** Wood Cascade
- U** Wood Knife

② Core Options:

- S** Standard
- G** Green, add \$109.26 list.



③ Wireway Options:

- A** Notched
- B** Curved

Adaptable Worksurfaces — Wood

120° Link

Depth	Number	<div>12</div>	Wood Group A K	Group B K	Wood Group A U	Group B U
18"(457mm)	WUDZ-1821-W	<div></div> C	\$ 750.47	\$ 813.36	\$ 981.80	\$1044.69
24"(610mm)	WUDZ-2427-W	<div></div> C	834.01	875.59	1065.34	1106.92
30"(762mm)	WUDZ-3033-W	<div></div> C	1164.08	1241.90	1507.33	1585.15



WUDZ-W

Features

- Includes worksurface and tie plate.
- Wood veneer worksurface with:
 - 3mm edgeband (K) or knife edge (U) on user edge and 1mm edgeband on sides and back, or
- Worksurfaces predrilled to accept most support options.
- Depths and widths shown in nominal dimensions.

Specification Tips

- Support column, leg or worksurface support panel must be used dependent upon application.
- Use with Corner, 120° Wrap-Around worksurfaces.
- **Worksurface support specific to product line and worksurface edge guidelines; must be separately specified; refer to Specification Guide for support and load.**
 - Standard link cantilever bracket
 - Tie plate with 18"(457mm) depth
 - Flush mount plate with 24"(610mm)-30"(762mm) depths
- Knife edge requires use of worksurface supports for that application; worksurface support panel and/or side brackets for use with knife edge.
- Mini cantilever brackets are for use with 18"(457mm) deep worksurfaces with knife edge only.
- **Due to manufacturing restrictions, not available with wood Cascade edge.**

To Order, Specify:

- 1) Product number.
- 2) Wood finish color.

1 Edge Options:

- K

 Wood Edgeband
- U

 Wood Knife

2 Core Options:


- S

 Standard
- G

 Green, add \$109.26 list.

Adaptable Worksurface Supports

	Depth	Width	Height	Description	Number	①	Price P	Price A C	Price B C
Standard Cantilever Bracket	15 3/4"(400mm)	2"(51mm)	12 3/4"(324mm)	Pair	ZNBD-1600-	P	\$96.68	\$114.36	\$116.44
				Left-hand	ZNBD-1600-	L	53.67	71.35	73.43
				Right-hand	ZNBD-1600-	R	53.67	71.35	73.43



Features

- Includes one right- and/or one left-handed bracket, and mounting screws.
- Provides cantilever support for the left and/or right side of worksurfaces.
- Installs in panel connector slots.
- Cantilever bracket can be used on either an 18"(457mm)-, 24"(610mm)- or 30"(762mm)-deep worksurface.
- Mounts worksurface in one inch vertical increments from a minimum of 21"(533mm) high.
- Provides clear access leg swing when supporting 24"(610mm)- and 30"(762mm)-deep worksurfaces at standard 29"(737mm) height.
- (P) finish option standard in black.
- Available on RUSH.

To Order, Specify:

- 1) Product number, including:


① Finish Options

- P** No finish specification required.
 - C** Trim colors for A and B.
- 2) Trim color (if applicable).

Specification Tip

- Two-handed cantilevers cannot access same connector slots.

Standard Shared Cantilever Bracket	15 3/4"(400mm)	4"(102mm)	12 3/4"(324mm)	Left-hand	ZNBH-1600-	L	\$79.57	\$97.25	\$99.33
				Right-hand	ZNBH-1600-	R	79.57	97.25	99.33



Features

- Includes one right or one left single shared cantilever and mounting screws.
- Provides cantilever support for adjoining worksurfaces.
- Installs in panel connector slots.
- Cantilever bracket can be used on either an 18"(457mm)-, 24"(610mm)- or 30"(762mm)-deep worksurface.
- A shared cantilever can be disassembled to create one left or one right cantilever depending upon how specified.
- Mounts worksurface in one inch vertical increments from a minimum of 21"(533mm) high.
- Provides clear access leg swing when supporting 24"(610mm)- and 30"(762mm)-deep worksurfaces at standard 29"(737mm) height.
- (P) finish option standard in black.
- Available on RUSH.

To Order, Specify:

- 1) Product number, including:


① Finish Options

- P** No finish specification required.
 - C** Trim colors for A and B.
- 2) Trim color (if applicable).

Specification Tips

- Two shared cantilevers cannot access same connector slots.
- Left-hand shared cantilever convertible to left-hand end condition; right-hand shared cantilever convertible to right-hand end condition for reconfiguration.
- The shared cantilever is specified as a handed bracket for future reconfiguration purposes.
- Suggestion: order half right-hand and half left-hand shared cantilevers for the initial installation.
- Cannot be attached to panel with off-modular pad.

Standard Mini Cantilever Bracket	9"(229mm)	1 5/8"(41mm)	10"(254mm)	Right-hand	ZNBD-1000-	R	\$ 61.22	\$ 78.90	\$ 80.98
				Left-hand	ZNBD-1000-	L	61.22	78.90	80.98
				Pair	ZNBD-1000-	P	104.23	121.91	123.99



Features

- Includes one right- and/or one left-handed bracket and mounting screws.
- Installs in panel side trim rail.
- Mounts worksurface in one inch vertical increments from a minimum of 17"(432mm) high.
- (P) finish option standard in black.

To Order, Specify:

- 1) Product number, including:

① Finish Option:


- P** No finish specification required.
 - C** Trim colors for A and B.
- 2) Trim color (if applicable).

Specification Tip

- Mini cantilever brackets are for use with 18"(457mm) deep worksurfaces with knife edge only.

Adaptable Worksurface Supports

	Depth	Width	Height	Description	Number ①	Price P	Price A C	Price B C
Shared Mini Cantilever Bracket	10"(254mm)	4"(102mm)	12 3/4"(324mm)	Left-hand	ZNBH-1000- L	\$106.35	\$124.03	\$126.11
				Right-hand	ZNBH-1000- R	106.35	124.03	126.11



ZNBH-1000

Features

- Includes one right or one left-handed bracket, and mounting screws.
- Provides cantilever support for the left or right side of worksurfaces.
- Installs in panel connector slots.
- Mounts worksurface in one inch vertical increments from a minimum of 21"(533mm) high.
- (P) finish option standard in black.

◆ Available on RUSH.

To Order, Specify:

- 1) Product number, including:

① Finish Options

P No finish specification required.

C Trim colors for A and B.


- 2) Trim color (if applicable).

Specification Tip

- Mini cantilever brackets are for use with 18"(457mm) deep worksurfaces with knife edge only.

Off-Modular Worksurface Bracket

Depth	Width	Number	Price
2 1/2"(64mm)	3"(76mm)	ZNBO-0000-PN	\$26.78

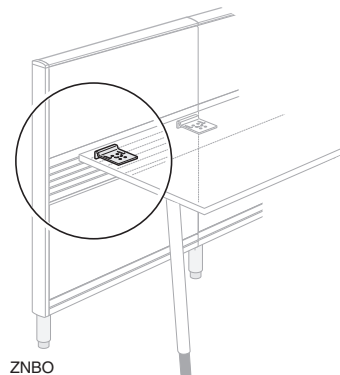

ZNBO

Features

- Includes one bracket and mounting screws.
- Standard in Black finish color only.

◆ Available on RUSH.

To Order, Specify:


- 1) Product number.
(No finish specification required.)

Specification Tips

- Must be used with off-modular super base pad.
- Attaches one side of worksurface to off-modular panel.
- Support column, straight leg basic and Moxie legs are required floor support options for off-modular worksurfaces.
- Two off-modular worksurface brackets are required for each worksurface (up to 60" wide) edge that contacts the off-modular spine.
- Worksurfaces that exceed 60" in width require three off-modular worksurface brackets.
- Worksurfaces attached to the off-modular spine must be joined to adjacent worksurfaces with two flush mount plates (ZUBF-0000-PN).
- Flush mount plates and off-modular worksurface brackets must not be sole supporting elements for a worksurface.
- Single or multiple adjoining worksurfaces must be floor supported at the outer exposed corners.
- Standard worksurface application guidelines are applicable in addition to the above specification tips.

Side Bracket

3/4"(19mm)	3 5/8"(92mm)	2 5/8"(67mm)	Left-hand	ZNBA-0000-PL	\$17.14
			Right-hand	ZNBA-0000-PR	17.14



Right-hand Left-hand

ZNBA-0000

Features

- Includes one left- or right-hand bracket and mounting screws.
- Mounts ends of rectilinear worksurface to adjacent panel.
- Worksurface depth and return panel width must be equal.
- Standard in Black finish only.

◆ Available on RUSH.

To Order, Specify:


- 1) Product number.
(No finish specification required.)

Specification Tip

- Not recommended for use with convergent worksurface.

Adaptable Worksurface Supports

	Depth	Width	Number	Price
Flush Mount Plate	3"(76mm)	4"(102mm)	ZUBF-0000-PN 	\$21.63




ZUBF-0000

Features

- Includes one bracket and mounting screws.
- Mounts straight end of convergent worksurfaces or conference end worksurfaces to panel-hung worksurfaces.
- Provides 90° attachment of two worksurfaces at the same height.
- Standard in Black finish color only.
- ◆ Available on RUSH.

To Order, Specify:

- 1) Product number.
(No finish specification required.)

Side Bracket for use with Knife Edge

Left-hand

Right-hand

ZNBA-0000-PRF
ZNBA-0000-PLF**Description**

Right

Number

ZNBA-0000-PRF

Price**A****B**

Left

ZNBA-0000-PLF

55.70


70.70

Features


- Includes one left- or right-hand bracket, mounting screws and dislodgement clips.
- Attaches to front corner of worksurface with knife edge.

To Order, Specify:

- 1) Product number.
- 2) Trim color.

Rear-Corner Bracket

ZNBR-0000

NumberZNBR-0000-PN **Price**

\$17.14

Features


- Includes one left-hand bracket and mounting screws.
- Attaches rear corner of worksurface to left-hand side trim rail of panel.
- Standard in Black finish only.
- ◆ Available on RUSH.

To Order, Specify:

- 1) Product number.
(No finish specification required.)

Specification Tip

- Required for all corner worksurfaces.


Countertop Bracket

ZNBT-PNE

ZNBT-PNS


Description

PREMISE for Steel/Wood Top Cap - Monolithic Panels

NumberZNBT-0000-PNE **Price**

\$49.50

PREMISE for Steel/Wood Top Cap - Stack Kits or Super Base Panels

ZNBT-0000-PNS 

83.24

Features

- Includes countertop brackets and screws to support countertops up to 72"(1829mm) wide.
- Standard in charcoal finish only.
- ◆ Available on RUSH.


To Order, Specify:

- 1) Product number.
(No finish specification required.)


Specification Tip

- Not for use with PREMISE grooved top caps.
- Not for use with knife edge countertop mounted on PREMISE Monolithic Panel.

Adaptable Worksurface Supports

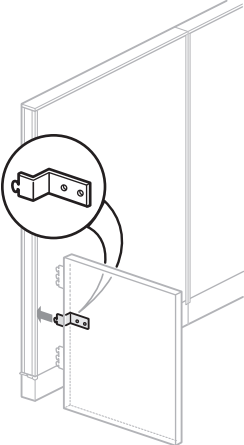	Description	For Use with	Number 1	Price
Anti Dislodgement Bracket — Only for use with Worksurface Support Panels 	Non-Shared	End condition	ZNBF-0000-P	\$91.05
	Shared	Panel seams	ZNBF-0000-P S	\$91.05
	<div><div>Features<ul style="list-style-type: none">Includes one left or right-hand shared or non-shared anti-dislodgement bracket and mounting screws.Standard in black finish only.</div><div>Specification Tips<ul style="list-style-type: none">Anti-Dislodgement Bracket only for use with worksurface support panels used in conjunction with a worksurface.Worksurface support panel with anti-dislodgement bracket can be used in place of a return panel in some applications.See Load and Support guidelines for details.</div><div>To Order, Specify:<ol style="list-style-type: none">Product number, including:<div><div>1</div>Handedness:<div><div>R</div> Right</div><div><div>L</div> Left</div></div>(No finish specification required.)</div></div>			

ZEBF-0000-P

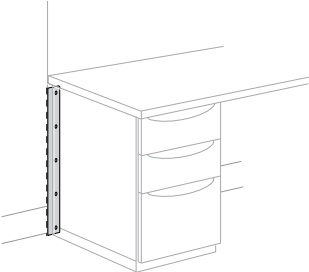
Pedestal-to-Panel Bracket 	Height	Depth	Description	Number	Price A	B
	2"(51mm)	27 1/4"(692mm)	Edgeband Edge	ZNBN-0000-PNJ	\$163.89	\$176.74
			Cascade Edge	ZNBN-0000-PNV	\$163.89	\$176.74
<div><div>Feature<ul style="list-style-type: none">Includes non-handed bracket and mounting screws.Installs in panel connector slots and attaches to the back side of an attached pedestal.Bracket is predrilled for attachment to pedestal.Does not attach to two-high lateral files.</div><div><div>Available on RUSH.</div></div><div>To Order, Specify:<ol style="list-style-type: none">Product number.Trim color.</div></div>						
<div><div>Specification Tips<ul style="list-style-type: none">Edgeband or Cascade bracket will work with knife edge.Worksurface and pedestal have to be same depth (nominal).Not for use with T-mold edge worksurface.When using knife edge specify storage 6"(152mm) less than worksurface depth.</div></div>						

ZNBN-0000

Worksurface Supports


Worksurface Support Panels

Laminate Height	Thickness	Depth	Number ①	Laminate A	Laminate B
27 7/8"(708mm)	1 1/2"(38mm)	12"(305mm)	ZNFS-1200-LNE ■	\$268.87	\$291.37
		18"(457mm)	ZNFS-1800-LNE ■	291.37	312.19
		24"(610mm)	ZNFS-2400-LNE ■	313.87	333.01
		30"(762mm)	ZNFS-3000-LNE ■	336.37	353.83




ZNFS-LNE


T-Mold




Edgeband



Cascade



Knife



Features

- Includes support panel with glides and hardware.
- Installs in panel connector slots and attaches under the end of a worksurface.
- Provides full support for one end of equal depth worksurfaces.
- Recommended in heavy loading conditions to eliminate front end deflection or to replace return panel.
- Non-handed design may be installed in left-hand, right-hand or shared configuration, and enhances reconfiguration possibilities.
- Laminate surfaces with plastic edge trim, 3mm radiused user edge provides soft access to knee space.
- Adjustable glides provide a maximum of 2"(51mm) of height adjustment.

■ Available on RUSH.

Specification Tips

- Specify worksurface support panel to match worksurface edge option.
- Actual depth varies per worksurface edge option.

To Order, Specify:


- 1) Product number, including:

① Edge Options:

- T** T-Mold
- J** Edgeband
- V** Cascade
- F** Knife

- 2) Laminate color.
- 3) Edge trim color.

Wood Height	Thickness	Depth	Number ①	Wood Group A	Group B
27 7/8"(708mm)	1 1/2"(38mm)	12"(305mm)	ZNFS-1200-WNE ■	\$477.75	\$523.82
		18"(457mm)	ZNFS-1800-WNE ■	506.73	556.58
		24"(610mm)	ZNFS-2400-WNE ■	535.71	589.34
		30"(762mm)	ZNFS-3000-WNE ■	564.69	622.10



ZNFS-WNE


Edgeband



Cascade



Knife



Features

- Includes support panel with glides and hardware.
- Installs in panel connector slots and attaches under the end of a worksurface.
- Provides full support for one end of equal depth worksurfaces.
- Recommended in heavy loading conditions to eliminate front end deflection or to replace return panel.
- Non-handed design may be installed in left-hand, right-hand or shared configuration, and enhances reconfiguration possibilities.
- Wood surface with wood edge trim.
- Adjustable glides provide a maximum of 2"(51mm) of height adjustment.

■ Available on RUSH.

Specification Tip

- Specify worksurface support panel to match worksurface edge option.

To Order, Specify:

- 1) Product number, including:


① Edge Options:

- K** Wood Edgeband
- M** Wood Cascade
- U** Wood Knife

- 2) Wood finish color.

Worksurface Supports

	Height	Number	Price A	B
Worksurface Height Adjustment Kit for Attached Pedestal	1-2"(25-51mm)	JAKA-18	\$167.44	\$170.56
		JAKA-24	177.84	182.00
		JAKA-30	188.24	193.44



JAKA-18

Class FM – SIN 711-3;
Discount Group XII

Features

- Includes top and eight height adjustment spacers and attachment hardware.
- Provides height adjustment for pedestal-supported worksurfaces.
- Raises worksurfaces in 1"(25mm) increments up to 2"(51mm) above standard worksurface height.
- Standard in charcoal finish color only.


To Order, Specify:

- 1) Product number.
- 2) Trim color.

NOTE:

For additional steel storage options and accessories, refer to Steel Casegoods/Files/Storage Price List.

Straight Leg Basic



WUCL-0001

Class CA – SIN 711-1;
Discount Group I

	Number	Price
	WUCL-0001	\$116.76

Features

- Includes one leg and mounting screws.
- 4"(102mm) glide adjustment range allows worksurface heights from 27"(686mm) to 31"(787mm).
- 2 1/4"(57mm) diameter column includes 6"(152mm)-diameter top plate.
- Standard in Charcoal finish color only.
- Shipped assembled.

To Order, Specify:


- 1) Product number.
(No finish specification required.)

◆ Available on RUSH.

Specification Tip

- Predrilled for convergent worksurfaces and end-of-run worksurface application.

Support Column



WUCC-0004

Class CA – SIN 711-1;
Discount Group I

	Number	Price A	B
	WUCC-0004	\$262.44	\$275.29

Features


- Includes one column and mounting screws.
- Column adjusts vertically for worksurface heights from 27"(686mm) to 31 1/2"(800mm).
- 3"(76mm)-diameter column includes 6"(152mm)- square top plate.

To Order, Specify:

- 1) Product number.
- 2) Trim color.

◆ Available on RUSH.

Adjustable Height Disc Base



ZZFZ

Class CA – SIN 711-1;
Discount Group I

	Diameter	Number	Price A	B
	21"(533mm)	ZZFZ-2121-PNF	\$623.44	\$637.37

Features

- Includes base, column and mounting screws.
- For use in panel mounted applications only.

To Order, Specify:

- 1) Product number.
- 2) Trim color.

Specification Tips

- Do not use as freestanding table base.
- 5" adjustment range allows worksurface heights of 27"(686mm) to 32"(813mm).

Worksurface Supports

	Height	Description	Number	Price A	B
Legs	26"-32"(660mm-813mm)	Straight Leg with Glide	NLEG-S-G	\$288.89	\$301.86
	26"-32"(660mm-813mm)	Angled Leg with Glide	NLEG-A-G	\$288.89	\$301.86



NLEG-S-G



NLEG-A-G

Class FA – SIN 711-1;
Discount Group XI

Features

- Includes one leg and mounting hardware.
- 1 3/4"(44mm) diameter column includes 6"(152mm) round top plate and mounting hardware.
- 6"(152mm) adjustment range allows heights from 26"(660mm) to 32"(813mm) in 1"(25mm) increments for glide legs.
- Inner sleeves standard in black finish color only; specify outer sleeve trim color.
- Shipped assembled.


To Order, Specify:

- 1) Product number.
- 2) Trim color.

Specification Tips

- Leg should be installed in predrilled worksurfaces.
- Tri Tables can only use angled legs.

Double Support Leg



ZZFK

Class FA – SIN 711-1;
Discount Group XI

Height (Adjustable)	Depth	Aluminum Number	Aluminum Price	
			A	B
26"-32"(660mm-813mm)	18"(457mm)	ZZFK-1800-PNFG	\$446.66	\$460.52
	24"(610mm)	ZZFK-2400-PNFG	473.32	487.18
	30"(762mm)	ZZFK-3000-PNFG	499.98	513.84

Height (Fixed)	Depth	Aluminum Number	Aluminum Price		Number	Steel Price	
			A	B		A	B
28"(711mm)	18"(457mm)	ZZFK-1800-PNFF	\$446.66	\$460.52	ZZFD-1800-PNFF	\$335.80	\$349.66
	24"(610mm)	ZZFK-2400-PNFF	473.32	487.18	ZZFD-2400-PNFF	362.46	376.32
	30"(762mm)	ZZFK-3000-PNFF	499.98	513.84	ZZFD-3000-PNFF	389.12	402.98

Features

- Includes one double leg and mounting hardware.
- Leg may be installed in left-hand or right-hand configuration.
- 6" adjustment range allows worksurface heights from 26"(660mm) to 32"(813mm).
- Provides full support for one end of equal depth worksurface.


To Order, Specify:

- 1) Product number.
- 2) Trim color.

Specification Tips

- One end of worksurface must be panel attached, not to be used as freestanding.
- Double leg with glide can be used to replace support post or support column.

Single Support Leg



ZUFJ

Class CA – SIN 711-1;
Discount Group I

Height	Width	Depth	Number	Price A	B
28"(711mm)	1 1/8"(29mm)	3 1/4"(83mm)	ZUFJ-0101-PNFG	\$169.25	\$183.72

Features

- Includes one support leg and mounting hardware.
- Glide provides 1/2"(13mm) of height adjustment.


To Order, Specify:

- 1) Product number.
- 2) Trim color.

Specification Tips

- May be used for worksurface applications.
- One end of worksurface must be panel attached, not to be used as freestanding.


Worksurface Supports

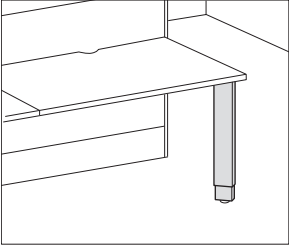	Height (Adjustable)	Description	Number	Price A	B
Support Post	26"(660mm)/30"(762mm)	Single post with glide, adjustable	ZZFJ-0101-PNFG ◆	\$239.95	\$253.88
<div><div></div><div><p>Features</p><ul style="list-style-type: none">• Includes one single post and mounting hardware.• 6" height adjustment (26"(660mm)-32"(813mm)).<p>Specification Tips</p><ul style="list-style-type: none">• May be used with worksurfaces in 90° or 45° applications.• One end of worksurface must be panel attached, not to be used as freestanding.<p>◆ Available on RUSH.</p></div><div><p>To Order, Specify:</p><ol style="list-style-type: none">1) Product number.2) Trim color.</div></div>					


ZZFJ

Worksurface Supports

	Height	Depth	Single Freestanding Number	Price A	B	Depth	Double Freestanding Number	Price A	B
Freestanding Worksurface Support Leg	26"-32"(660mm-813mm)	16"(406mm)	NLEG-16-F	\$490.79	\$503.65	54"(1372mm)	NLEG-2430-D	\$614.65	\$627.51
		24"(610mm)	NLEG-24-F	528.17	541.03	48"(1219mm)	NLEG-2424-D	579.60	592.46
		30"(762mm)	NLEG-30-F	574.92	587.78	60"(1524mm)	NLEG-3030-D	652.05	664.91



NLEG-F



NLEG-D

Features

- Includes support legs and mounting hardware.
- 1 3/4"(44mm) diameter columns include 4 1/2"(114mm) round top plate and mounting hardware.
- 6"(152mm) adjustment range allows worksurface heights from 26"(660mm) to 32"(813mm) in 1"(25mm) increments.
- Single includes one straight leg and one angled leg.
- Double includes two angled legs.
- Inner sleeves standard in black finish color only; specify outer sleeve trim color.
- Shipped assembled.

◆ Available on RUSH.


To Order, Specify:

- 1) Product number.
- 2) Trim color.

Specification Tips

- Maximum gap between worksurface mounted on double supports is 1 1/4"(32mm).
- Single supports one end of worksurface.
- Double supports two worksurfaces back-to-back.
- Specify appropriate depth freestanding worksurface support leg to match depth of worksurface.
- One end of worksurface must be panel attached, not to be used as freestanding.

Worksurface Support Leg — Panel Mounted



NLEG-P

Height	Depth	Width	Panel Mounted Number	Price A	B
26"-32" (660mm-813mm)	16"(406mm)	1 3/4"(44mm)	NLEG-16-P	\$384.45	\$397.31
	24"(610mm)		NLEG-24-P	419.50	432.36
	30"(610mm)		NLEG-30-P	453.39	466.25

Features

- Includes one support leg, mounting bracket and cover, and mounting hardware.
- Installs in panel connector slots and attaches under the worksurface.
- Leg may be installed in left-hand, right-hand, or shared configuration.
- 6"(152mm) adjustment range allows worksurface heights from 26"(660mm) to 32"(813mm) in 1"(25mm) increments.
- Inner sleeves standard in black finish color only; specify outer sleeve trim color.
- Shipped unassembled.

To Order, Specify:


- 1) Product number.
- 2) Trim color.

Specification Tips

- Specify appropriate depth support leg to match depth of worksurface.
- Panel mounted worksurface(s) with single row of overhead storage units above may be supported with the worksurface support leg at the end of a panel run, only if the panel run is supported by **full-height** panel connectors. May not be used with pre-configured (sectional) panel connectors in this application.

Worksurface Accessories

	Depth	Width	Height	Number	Price
Horizontal Wire Manager	2"(51mm)	15"(381mm)	3"(76mm)	WUAW-1500-PNH	\$150.80



WUAW
Class CA

Features

- Includes a set of ten, plastic wire managers and mounting screws.
- Manages and stores wire and cables under worksurfaces.
- Standard in Black trim.
- ◆ Available on RUSH.

To Order, Specify:

- 1) Product number.
(No finish specification required.)

Worksurface Grommet



WUAC-WSG
Class CA

	Height	Inside Diameter	Outside Diameter	Number	Price
	1"(25mm)	2 3/4"(70mm)	3"(76mm)	WUAC-WSG	\$19.77

Features

- Includes one cover.
- Must be field-installed.
- Available in Charcoal color only.
- ◆ Available on RUSH.

To Order, Specify:

- 1) Product number.
(No finish specification required.)

Wire Management Loop



NEH-8
Class CA

	Width	Installed Height	Number	Price
	2 3/4"(70mm)	4 1/2"(114mm)	NEH-8	\$36.22


Features

- Includes box of eight wire management loops.
- Manages and stores wires or cables through loops under worksurfaces or desk tops.
- Threaded top allows installation anywhere under worksurfaces in recommended 18"(457mm) intervals.
- Loop capacity: 62 category 5 communication cables.
- Standard in charcoal trim color only.
- Wire management loop in 2"(51mm) in diameter with 3.1 sq. inches of cross section area.
- ◆ Available on RUSH.

To Order, Specify:

- 1) Product number.
(No finish specification required.)

Make-A-Corner



MAC-0001
Class AA

	Height	Width	Number	Price
	21 1/8"(537mm)	26 1/8"(664mm)	MAC-0001	\$157.63


Features

- Creates an angled edge between two (2) perpendicular regular worksurfaces.
- Slides over the top of 1 3/16"(30mm) worksurfaces.
- Accommodates an adjustable keyboard or mouse pad track (screws included).

To Order, Specify:

- 1) Product number.
- 2) Non-metallic trim color.

Worksurface Accessories

	Length	Number	Price
Worksurface Reinforcement Channel  WUAR	16"(406mm)	WUAR-1600-PH ■	\$26.66
	24"(610mm)	WUAR-2400-PH ■	29.06
	32"(813mm)	WUAR-3200-PH ■	31.46
	39"(991mm)	WUAR-3900-PH ■	33.56
	47"(1194mm)	WUAR-4700-PH ■	35.96
	54"(1372mm)	WUAR-5400-PH ■	38.06

Features

- Includes metal, U-shaped channel and mounting screws.
- Field installed, located and drilled per installation instructions.
- Worksurface reinforcement channels must be specified to provide additional support for laminate or wood worksurfaces with 50" or larger spans that are heavily loaded and not otherwise supported by mid-span cantilevers, worksurface supports, legs, or under-worksurface storage.
- Specify worksurface reinforcement channel in length that won't interfere with lower storage.
- Available on RUSH.

To Order, Specify:

- 1) Product number.
(No finish specification required.)

Application Guidelines

Laminate or Wood Panel Hung Worksurface Applications (for standard 29" high worksurfaces)

General Application/Number:

- 54" wide with two suspended pedestals or stationary pedestals over 27" in height, use WUAR-1600-PH.
- 60" wide top with two suspended pedestals or stationary pedestals over 27" in height, use WUAR-2400-PH.
- 54" wide top with one suspended pedestal or stationary pedestal over 27" in height, use WUAR-3200-PH.
- 50" wide top with one suspended pedestal or stationary pedestal over 27" in height, use WUAR-3900-PH.
- 54" wide top – no suspended pedestal or stationary pedestal over 27" in height, use WUAR-4700-PH.
- 60" wide top – no suspended pedestal or stationary pedestal over 27" in height, use WUAR-5400-PH.

Worksurface reinforcement channels can provide additional strengthening to 54" and 60" worksurfaces on like-sized panels where heavy loads are anticipated. Depending on application, heavily loaded worksurfaces may not need a worksurface reinforcement channel when:

- Support is provided by a third cantilever on 54" and 60" worksurfaces (spanning multiple panels) or by using other under-worksurface support methods.
- Fixed/attached pedestals provide under- worksurface support.
- Panel hung worksurfaces wider than 60" require more than two cantilevers.

Laminate or Wood Convergent Tops and Convergent Freestanding Units

- 72" convergent worksurfaces and wrap-around convergent worksurfaces, panel hung, or freestanding, use WUAR-3900-PH.


Application Guidelines for using Worksurface Reinforcement Channel with Under-Worksurface Storage

For worksurfaces at the standard 29" height.

- All pedestals under 25" in height can be used under a worksurface with a worksurface reinforcement channel.
- Mobile pedestals over 27" in height cannot be used under a worksurface with a worksurface reinforcement channel. By increasing worksurface height to 30", mobile pedestals can be used with a worksurface reinforcement channel.
- Stationary pedestals can be used in applications with worksurface reinforcement channels. Refer to Laminate or Wood Panel Hung Worksurface Applications matrix information above regarding suspended and stationary pedestals.
- In most applications, lateral files or fixed pedestals supply adequate support so that worksurface reinforcement channels are not needed.

Adaptable Upper Storage

Shelves

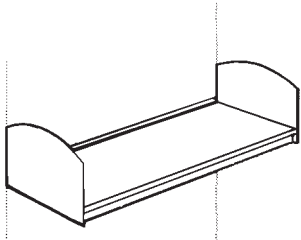	Height	Depth	Width	Number	Trim A	B
Shelf 	10"(254mm)	13 1/4"(337mm)	24"(610mm)	UNSN-1024-PM	\$208.59	\$219.04
			30"(762mm)	UNSN-1030-PM	216.06	229.12
			36"(914mm)	UNSN-1036-PM	223.53	239.20
			42"(1067mm)	UNSN-1042-PM	231.00	249.28
			48"(1219mm)	UNSN-1048-PM	238.47	259.36
			54"(1372mm)	UNSN-1054-PM	245.94	269.44
			60"(1524mm)	UNSN-1060-PM	253.41	279.52
			66"(1676mm)	UNSN-1066-PM	260.88	289.60
			72"(1829mm)	UNSN-1072-PM	268.35	299.68

UNSN-PM

Features

- Includes shelf with back stop, end panels and hardware.
- Accepts separately specified task lights.
- Safety interlock prevents dislodgement from panel connector slots.
- Shelf thickness is 2"(51mm).
- Shipped unassembled.
- ◆ Available on RUSH.


To Order, Specify:

- 1) Product number.
- 2) Trim color for shelf and end panels.

Specification Tips

- Specify separate shelf gang clip for unbalanced configurations with greater than one row of shelves.
- To be installed in connector slots on same size panel or on a combination of panels that equal the shelf width.
- Cannot be used with slat pads.

Up Mount Shelf



UNTN-PM

8"(203mm)	14"(356mm)	30"(762mm)	UNTN-0830-PM	\$395.70	\$408.76
		36"(914mm)	UNTN-0836-PM	403.17	418.84
		42"(1067mm)	UNTN-0842-PM	410.64	428.92
		48"(1219mm)	UNTN-0848-PM	418.11	439.00

Features

- Includes shelf with back stop, end panels, rod, and hardware.
- Accepts separately specified task lights.
- Accepts upmount bracket shelf.
- Safety interlock prevents dislodgement from panel connector slots.
- Shipped unassembled.

To Order, Specify:


- 1) Product number.
- 2) Trim color for shelf, end panels and rod.

Specification Tips


- **Must be used with monolithic panels, 16"(406mm) stack kits, or 16"(406mm) stack pads.**
- Cannot be used with 10"(254mm) stack pads or kits.
- To be installed in connector slots on same size panel or on a combination of panels that equal the shelf width.
- Specify separate shelf gang clip for unbalanced configurations.
- Recommended for use with 48"(1219mm) and 53"(1346mm) high panel configurations.
- Back stop does not provide full back closure.
- Not available to use in off-modular applications.

Adaptable Upper Storage


Shelves

	Height	Depth	Width	Number	Laminate A		Laminate B	
					Trim A	Trim B	Trim A	Trim B
Straight Mini Shelf  UNSY-PM	5 1/4"(133mm)	6 1/4"(158mm)	18"(457mm)	UNSY-0418-PM	\$185.81	\$187.99	\$200.01	\$202.19
			24"(610mm)	UNSY-0424-PM	194.77	196.95	210.06	212.24
			30"(762mm)	UNSY-0430-PM	203.73	205.91	220.11	222.29
			36"(914mm)	UNSY-0436-PM	212.69	214.87	230.16	232.34
			42"(1067mm)	UNSY-0442-PM	221.65	223.83	240.21	242.39
			48"(1219mm)	UNSY-0448-PM	230.61	232.79	250.26	252.44

- Features**
 - Includes shelf, brackets, and hardware.
 - Shelf thickness is 3/4"(19mm).
 - Shipped unassembled.
- Specification Tips**
 - To be installed in connector slots on same size panel or on a combination of panels that equals the shelf width.
 - Support brackets must be installed under shelf surface.
 - Designed for lightweight accessories.
 - Does not accept separately specified task lights.
- To Order, Specify:**
 - 1) Product number.
 - 2) Laminate shelf color.
 - 3) Edgeband trim color.
 - 4) Trim color for brackets.

Corner Mini Shelf  UNSZ-PM	5 1/4"(133mm)	6 1/4"(158mm)	24"(610mm)	UNSZ-0424-PM	\$364.42	\$367.70	\$395.00	\$398.28
			30"(762mm)	UNSZ-0430-PM	374.44	377.72	405.02	408.30
			36"(914mm)	UNSZ-0436-PM	384.46	387.74	416.68	419.96
			42"(1067mm)	UNSZ-0442-PM	394.48	397.76	428.34	431.62
			48"(1219mm)	UNSZ-0448-PM	404.50	407.78	440.00	443.28


- Features**
 - Includes shelf, brackets, and hardware.
 - Middle of shelf is 15 1/4"(387mm) deep.
 - Shelf thickness is 3/4"(19mm).
 - Shipped unassembled.
- Specification Tips**
 - To be installed in connector slots on two panels or on a combination of panels of equivalent widths in 90° configuration.
 - Support brackets must be installed under shelf surface.
 - Designed for lightweight accessories.
 - Does not accept separately specified task lights.
- To Order, Specify:**
 - 1) Product number.
 - 2) Laminate shelf color.
 - 3) Edgeband trim color.
 - 4) Trim color for brackets.

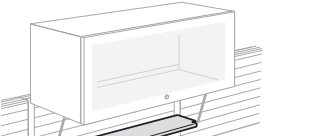	Height	Depth	Width	Number	Trim A	B
Up Mount Bracket Shelf  UNSN-PM	10"(254mm)	5"(127mm)	30"(762mm)	UNSN-0130-PM	\$63.06	\$74.53
			36"(914mm)	UNSN-0136-PM	67.65	79.12
			42"(1067mm)	UNSN-0142-PM	72.24	83.71
			48"(1219mm)	UNSN-0148-PM	76.83	88.30


- Features**
 - Includes shelf with back stop.
 - Shelf thickness is 1/2"(13mm).
- Specification Tip**
 - To be installed on equal width up mount overhead storage units or up mount shelves.
- To Order, Specify:**
 - 1) Product number.
 - 2) Trim color for shelf.

Adaptable Upper Storage


Overhead Storage Unit, Standard Mount – Painted Door



UNFS-PM



UNKS-PM



UNHS-PM

Height	Depth	Width	Flipper Door Number ①②	Trim A Trim A	Trim B	Trim B Trim A	Trim B
16"(406mm)	14"(356mm)	24"(610mm)	UNFS-1624-PM	\$ 562.49	\$ 565.83	\$ 571.40	\$ 574.74
		30"(762mm)	UNFS-1630-PM	589.22	593.12	599.24	603.14
		36"(914mm)	UNFS-1636-PM	615.95	620.41	627.08	631.54
		42"(1067mm)	UNFS-1642-PM	642.68	647.70	654.92	659.94
		48"(1219mm)	UNFS-1648-PM	669.41	674.99	682.76	688.34
		54"(1372mm)	UNFS-1654-PM	696.14	702.28	710.60	716.74
		60"(1524mm)	UNFS-1660-PM	788.57	795.27	804.14	810.84
		66"(1676mm)	UNFS-1666-PM	961.16	968.42	977.84	985.10
		72"(1829mm)	UNFS-1672-PM	1143.79	1151.61	1161.58	1169.40
Height	Depth	Width	Cabinet Door Number ①	Trim A Trim A	Trim B	Trim B Trim A	Trim B
16"(406mm)	14"(356mm)	24"(610mm)	UNKS-1624-PM	\$ 948.88	\$ 952.22	\$ 957.79	\$ 961.13
		30"(762mm)	UNKS-1630-PM	975.61	979.51	985.63	989.53
		36"(914mm)	UNKS-1636-PM	1002.34	1006.80	1013.47	1017.93
		42"(1067mm)	UNKS-1642-PM	1029.07	1034.09	1041.31	1046.33
		48"(1219mm)	UNKS-1648-PM	1093.66	1099.24	1107.01	1112.59
		54"(1372mm)	UNKS-1654-PM	1197.22	1203.36	1211.68	1217.82
		60"(1524mm)	UNKS-1660-PM	1308.57	1315.27	1324.14	1330.84
		66"(1676mm)	UNKS-1666-PM	1592.52	1599.78	1609.20	1616.46
		72"(1829mm)	UNKS-1672-PM	1865.35	1873.17	1883.14	1890.96
Height	Depth	Width	Single Slider Door Number ①	Trim A Trim A	Trim B	Trim B Trim A	Trim B
16"(406mm)	14"(356mm)	24"(610mm)	UNHS-1624-PM	\$ 562.49	\$ 565.83	\$ 571.40	\$ 574.74
		30"(762mm)	UNHS-1630-PM	589.22	593.12	599.24	603.14
		36"(914mm)	UNHS-1636-PM	615.95	620.41	627.08	631.54
		42"(1067mm)	UNHS-1642-PM	642.68	647.70	654.92	659.94
		48"(1219mm)	UNHS-1648-PM	669.41	674.99	682.76	688.34
		54"(1372mm)	UNHS-1654-PM	696.14	702.28	710.60	716.74
		60"(1524mm)	UNHS-1660-PM	788.57	795.27	804.14	810.84
		66"(1676mm)	UNHS-1666-PM	961.16	968.42	977.84	985.10
		72"(1829mm)	UNHS-1672-PM	1143.79	1151.61	1161.58	1169.40

Features

- Includes door front without lock, top shelf, bottom shelf with back stop, end panels, and hardware. Optional locks available.
- Inside dimensions:
 - Height: 12 3/4"(324mm)
 - Depth: 13 1/4"(337mm)
- Locks are available in black or chrome.
- For lock options, refer to Lock Program Price List.
- Accepts separately specified task lights.
- Safety interlock prevents dislodgement from panel component slots.
- Flipper Door - 66"(1676mm) and 72"(1829mm) units have two doors, one lock per door if locking option is specified.
- Flipper door stores on top of unit.
- Cabinet Door - 24"-42"(610mm-1067mm) units have two cabinet doors with one lock if locking option is specified.
- 48"-72"(1219mm-1829mm) units have four cabinet doors with two locks if locking option is specified.
- Single Slider Door - Door is half the width of the unit.
- Shipped unassembled.

■ Available on RUSH with standard close only.

Specification Tips

- To be installed in connector slots on same size panel or on a combination of panels that equal the width of the storage unit.
- Specify separate shelf gang clip for unbalanced configurations with greater than one row of overhead storage units.
- Units cannot be retrofitted with different door style; ie: flipper doors cannot be changed to cabinet doors.
- Doors cannot be retrofitted with locks.
- Overhead storage units cannot be retrofitted to:
 - Standard Overhead Storage Unit – Off-Modular
 - Up Mount Overhead Storage Unit
 - Up Mount Overhead Storage Unit – Off-Modular
- Cannot be used with slat pads.
- Flipper doors can be field retrofitted with slow close mechanism from eParts.

To Order, Specify:

- Product number, including:

① Locking Option:

- N** Non-locking
- L** Locking, add \$17.82 list.


② Close Option: (Flipper door only)

- S** Slow close, add \$291.74 list.
- 66" and 72" wide units, add \$583.48 list.
- No specification required for standard close. ■


- Trim color for shelf and end panels.
- Trim color for door.
- Trim color for lock housing, if applicable.

Adaptable Upper Storage


Overhead Storage Unit, Standard Mount – Translucent Door



UNFF-QM



UNKF-QM



UNHF-QM

Height	Depth	Width	Flipper Door Number ① ②	White Trim A	Trim B	Patterned Trim A	Trim B
16"(406mm)	14"(356mm)	24"(610mm)	UNFF-1624-QM	\$ 887.73	\$ 896.64	\$1155.05	\$1163.96
		30"(762mm)	UNFF-1630-QM	927.81	937.83	1195.13	1205.15
		36"(914mm)	UNFF-1636-QM	967.89	979.02	1235.21	1246.34
		42"(1067mm)	UNFF-1642-QM	1007.97	1020.21	1275.29	1287.53
		48"(1219mm)	UNFF-1648-QM	1048.05	1061.40	1315.37	1328.72
		54"(1372mm)	UNFF-1654-QM	1088.13	1102.59	1355.45	1369.91
		60"(1524mm)	UNFF-1660-QM	1225.08	1240.65	1492.40	1507.97
		66"(1676mm)	UNFF-1666-QM	1520.15	1536.83	1787.47	1804.15
		72"(1829mm)	UNFF-1672-QM	1741.75	1759.54	2009.07	2026.86
Height	Depth	Width	Cabinet Door Number ①	White Trim A	Trim B	Patterned Trim A	Trim B
16"(406mm)	14"(356mm)	24"(610mm)	UNKF-1624-QM	\$1441.14	\$1450.05	\$1708.46	\$1717.37
		30"(762mm)	UNKF-1630-QM	1497.93	1507.95	1765.25	1775.27
		36"(914mm)	UNKF-1636-QM	1554.72	1565.85	1822.04	1833.17
		42"(1067mm)	UNKF-1642-QM	1611.51	1623.75	1878.83	1891.07
		48"(1219mm)	UNKF-1648-QM	1687.22	1700.57	1954.54	1967.89
		54"(1372mm)	UNKF-1654-QM	1853.15	1867.61	2120.47	2134.93
		60"(1524mm)	UNKF-1660-QM	2021.28	2036.85	2288.60	2304.17
		66"(1676mm)	UNKF-1666-QM	2449.97	2466.65	2717.29	2733.97
		72"(1829mm)	UNKF-1672-QM	2862.00	2879.79	3129.32	3147.11
Height	Depth	Width	Single Slider Door Number ①	White Trim A	Trim B	Patterned Trim A	Trim B
16"(406mm)	14"(356mm)	24"(610mm)	UNHF-1624-QM	\$ 887.73	\$ 896.64	\$1155.05	\$1163.96
		30"(762mm)	UNHF-1630-QM	927.81	937.83	1195.13	1205.15
		36"(914mm)	UNHF-1636-QM	967.89	979.02	1235.21	1246.34
		42"(1067mm)	UNHF-1642-QM	1007.97	1020.21	1275.29	1287.53
		48"(1219mm)	UNHF-1648-QM	1048.05	1061.40	1315.37	1328.72
		54"(1372mm)	UNHF-1654-QM	1088.13	1102.59	1355.45	1369.91
		60"(1524mm)	UNHF-1660-QM	1225.08	1240.65	1492.40	1507.97
		66"(1676mm)	UNHF-1666-QM	1520.15	1536.83	1787.47	1804.15
		72"(1829mm)	UNHF-1672-QM	1741.75	1759.54	2009.07	2026.86

Features

- Includes door front without lock, top shelf, bottom shelf with back stop, end panels, and hardware. Optional locks available.
- Inside dimensions:
 - Height: 12 3/4"(324mm)
 - Depth: 13 1/4"(337mm)
- Locks are available in black or chrome.
- For lock options, refer to Lock Program Price List.
- Accepts separately specified task lights.
- Safety interlock prevents dislodgement from panel component slots.
- Flipper Door - 66"(1676mm) and 72"(1829mm) units have two doors, one lock per door if locking option is specified.
- Flipper door stores on top of unit.
- Cabinet Door - 24"-42"(610mm-1067mm) units have two cabinet doors with one lock if locking option is specified.
- - 48"-72"(1219mm-1829mm) units have four cabinet doors with two locks if locking option is specified.
- Single Slider Door - Door is half the width of the unit.
- Shipped unassembled.

Specification Tips

- To be installed in connector slots on same size panel or on a combination of panels that equal the width of the storage unit.
- Specify separate shelf gang clip for unbalanced configurations with greater than one row of overhead storage units.
- Units cannot be retrofitted with different door style; ie: flipper doors cannot be changed to cabinet doors.
- Doors cannot be retrofitted with locks.
- Overhead storage units cannot be retrofitted to:
 - Standard Overhead Storage Unit – Off-Modular
 - Up Mount Overhead Storage Unit
 - Up Mount Overhead Storage Unit – Off-Modular
- Cannot be used with slat pads.
- Flipper doors can be field retrofitted with slow close mechanism from eParts.

To Order, Specify:

- 1) Product number, including:

① Locking Option:

- ☐ N Non-locking
- ☐ L Locking, add \$17.82 list.


② Close Option: (Flipper door only)

- ☐ S Slow close, add \$291.74 list.
66" and 72" wide units,
add \$583.48 list.
- ☐ No specification required for standard close.


- 2) Trim color for shelf and end panels.
- 3) Translucent color for door.
- 4) Trim color for lock housing, if applicable.

Adaptable Upper Storage


Overhead Storage Unit, Standard Mount – Wood Door



UNFS-WM



UNKS-WM



UNHS-WM

Height	Depth	Width	Flipper Door Number ① ②	Wood Group A Trim A	Trim B	Wood Group B Trim A	Trim B
16"(406mm)	14"(356mm)	24"(610mm)	UNFS-1624-WM	\$ 925.50	\$ 934.41	\$ 990.09	\$ 999.00
		30"(762mm)	UNFS-1630-WM	968.94	978.96	1033.53	1043.55
		36"(914mm)	UNFS-1636-WM	1012.38	1023.51	1076.97	1088.10
		42"(1067mm)	UNFS-1642-WM	1055.82	1068.06	1120.41	1132.65
		48"(1219mm)	UNFS-1648-WM	1099.26	1112.61	1163.85	1177.20
		54"(1372mm)	UNFS-1654-WM	1142.70	1157.16	1207.29	1221.75
		60"(1524mm)	UNFS-1660-WM	1321.99	1337.56	1386.58	1402.15
		66"(1676mm)	UNFS-1666-WM	1594.81	1611.49	1659.40	1676.08
		72"(1829mm)	UNFS-1672-WM	1889.91	1907.70	1954.50	1972.29
Height	Depth	Width	Cabinet Door Number ①	Wood Group A Trim A	Trim B	Wood Group B Trim A	Trim B
16"(406mm)	14"(356mm)	24"(610mm)	UNKS-1624-WM	\$1525.68	\$1534.59	\$1590.27	\$1599.18
		30"(762mm)	UNKS-1630-WM	1575.81	1585.83	1640.40	1650.42
		36"(914mm)	UNKS-1636-WM	1625.94	1637.07	1690.53	1701.66
		42"(1067mm)	UNKS-1642-WM	1676.07	1688.31	1740.66	1752.90
		48"(1219mm)	UNKS-1648-WM	1746.23	1759.58	1810.82	1824.17
		54"(1372mm)	UNKS-1654-WM	1927.77	1942.23	1992.36	2006.82
		60"(1524mm)	UNKS-1660-WM	2112.64	2128.21	2177.23	2192.80
		66"(1676mm)	UNKS-1666-WM	2563.62	2580.30	2628.21	2644.89
		72"(1829mm)	UNKS-1672-WM	3003.50	3021.29	3068.09	3085.88
Height	Depth	Width	Single Slider Door Number ①	Wood Group A Trim A	Trim B	Wood Group B Trim A	Trim B
16"(406mm)	14"(356mm)	24"(610mm)	UNHS-1624-WM	\$ 925.50	\$ 934.41	\$ 990.09	\$ 999.00
		30"(762mm)	UNHS-1630-WM	968.94	978.96	1033.53	1043.55
		36"(914mm)	UNHS-1636-WM	1012.38	1023.51	1076.97	1088.10
		42"(1067mm)	UNHS-1642-WM	1055.82	1068.06	1120.41	1132.65
		48"(1219mm)	UNHS-1648-WM	1099.26	1112.61	1163.85	1177.20
		54"(1372mm)	UNHS-1654-WM	1142.70	1157.16	1207.29	1221.75
		60"(1524mm)	UNHS-1660-WM	1321.99	1337.56	1386.58	1402.15
		66"(1676mm)	UNHS-1666-WM	1594.81	1611.49	1659.40	1676.08
		72"(1829mm)	UNHS-1672-WM	1889.91	1907.70	1954.50	1972.29

Features

- Includes door front without lock, top shelf, bottom shelf with back stop, end panels, and hardware. Optional locks available.
- Inside dimensions:
 - Height: 12 3/4"(324mm)
 - Depth: 13 1/4"(337mm)
- Locks are available in black or chrome.
- For lock options, refer to Lock Program Price List.
- Accepts separately specified task lights.
- Safety interlock prevents dislodgement from panel component slots.
- Flipper Door - 66"(1676mm) and 72"(1829mm) units have two doors, one lock per door if locking option is specified.
- Flipper door stores on top of unit.
- Cabinet Door - 24"-42"(610mm-1067mm) units have two cabinet doors with one lock if locking option is specified.
- 48"-72"(1219mm-1829mm) units have four cabinet doors with two locks if locking option is specified.
- Single Slider Door - Door is half the width of the unit.
- Shipped unassembled.

Specification Tips

- To be installed in connector slots on same size panel or on a combination of panels that equal the width of the storage unit.
- Specify separate shelf gang clip for unbalanced configurations with greater than one row of overhead storage units.
- Units cannot be retrofitted with different door style; ie: flipper doors cannot be changed to cabinet doors.
- Doors cannot be retrofitted with locks.
- Overhead storage units cannot be retrofitted to:
 - Standard Overhead Storage Unit – Off-Modular
 - Up Mount Overhead Storage Unit
 - Up Mount Overhead Storage Unit – Off-Modular
- Cannot be used with slat pads.
- Flipper doors can be field retrofitted with slow close mechanism from eParts.

To Order, Specify:

- Product number, including:

① Locking Option:

- ☐ N Non-locking
- ☐ L Locking, add \$17.82 list.


② Close Option: (Flipper door only)

- ☐ S Slow close, add \$291.74 list.
66" and 72" wide units,
add \$583.48 list.
- ☐ No specification required for standard close.


- Trim color for shelf and end panels.
- Wood finish for door.
- Trim color for lock housing, if applicable.

Adaptable Upper Storage


Overhead Storage Unit, Standard Mount – Laminate Door



UNFS-LM



UNKS-LM



UNHS-LM

Height	Depth	Width	Flipper Door Number ① ②	Laminate A Trim A	Trim B	Laminate B Trim A	Trim B
16"(406mm)	14"(356mm)	24"(610mm)	UNFS-1624-LM	\$ 768.49	\$ 777.40	\$ 785.20	\$ 794.11
		30"(762mm)	UNFS-1630-LM	815.26	825.28	831.97	841.99
		36"(914mm)	UNFS-1636-LM	862.03	873.16	878.74	889.87
		42"(1067mm)	UNFS-1642-LM	908.80	921.04	925.51	937.75
		48"(1219mm)	UNFS-1648-LM	955.57	968.92	972.28	985.63
		54"(1372mm)	UNFS-1654-LM	1002.34	1016.80	1019.05	1033.51
		60"(1524mm)	UNFS-1660-LM	1117.03	1132.60	1133.74	1149.31
		66"(1676mm)	UNFS-1666-LM	1370.90	1387.58	1387.61	1404.29
		72"(1829mm)	UNFS-1672-LM	1625.91	1643.70	1642.62	1660.41
Height	Depth	Width	Cabinet Door Number ①	Laminate A Trim A	Trim B	Laminate B Trim A	Trim B
16"(406mm)	14"(356mm)	24"(610mm)	UNKS-1624-LM	\$1321.90	\$1330.81	\$1338.61	\$1347.52
		30"(762mm)	UNKS-1630-LM	1368.67	1378.69	1385.38	1395.40
		36"(914mm)	UNKS-1636-LM	1415.44	1426.57	1432.15	1443.28
		42"(1067mm)	UNKS-1642-LM	1462.21	1474.45	1478.92	1491.16
		48"(1219mm)	UNKS-1648-LM	1529.01	1542.36	1545.72	1559.07
		54"(1372mm)	UNKS-1654-LM	1688.25	1702.71	1704.96	1719.42
		60"(1524mm)	UNKS-1660-LM	1845.25	1860.82	1861.96	1877.53
		66"(1676mm)	UNKS-1666-LM	2245.00	2261.68	2261.71	2278.39
		72"(1829mm)	UNKS-1672-LM	2630.30	2648.09	2647.01	2664.80
Height	Depth	Width	Single Slider Door Number ①	Laminate A Trim A	Trim B	Laminate B Trim A	Trim B
16"(406mm)	14"(356mm)	24"(610mm)	UNHS-1624-LM	\$ 768.49	\$ 777.40	\$ 785.20	\$ 794.11
		30"(762mm)	UNHS-1630-LM	815.26	825.28	831.97	841.99
		36"(914mm)	UNHS-1636-LM	862.03	873.16	878.74	889.87
		42"(1067mm)	UNHS-1642-LM	908.80	921.04	925.51	937.75
		48"(1219mm)	UNHS-1648-LM	955.57	968.92	972.28	985.63
		54"(1372mm)	UNHS-1654-LM	1002.34	1016.80	1019.05	1033.51
		60"(1524mm)	UNHS-1660-LM	1117.03	1132.60	1133.74	1149.31
		66"(1676mm)	UNHS-1666-LM	1370.90	1387.58	1387.61	1404.29
		72"(1829mm)	UNHS-1672-LM	1625.91	1643.70	1642.62	1660.41

Features

- Includes door front without lock, top shelf, bottom shelf with back stop, end panels, and hardware. Optional locks available.
- Inside dimensions:
 - Height: 12 3/4"(324mm)
 - Depth: 13 1/4"(337mm)
- Locks are available in black or chrome.
- For lock options, refer to Lock Program Price List.
- Accepts separately specified task lights.
- Safety interlock prevents dislodgement from panel component slots.
- Flipper Door - 66"(1676mm) and 72"(1829mm) units have two doors, one lock per door if locking option is specified.
- Flipper door stores on top of unit.
- Cabinet Door - 24"-42"(610mm-1067mm) units have two cabinet doors with one lock if locking option is specified.
- - 48"-72"(1219mm-1829mm) units have four cabinet doors with two locks if locking option is specified.
- Single Slider Door - Door is half the width of the unit.
- Shipped unassembled.

Specification Tips

- To be installed in connector slots on same size panel or on a combination of panels that equal the width of the storage unit.
- Specify separate shelf gang clip for unbalanced configurations with greater than one row of overhead storage units.
- Units cannot be retrofitted with different door style; ie: flipper doors cannot be changed to cabinet doors.
- Doors cannot be retrofitted with locks.
- Overhead storage units cannot be retrofitted to:
 - Standard Overhead Storage Unit – Off-Modular
 - Up Mount Overhead Storage Unit
 - Up Mount Overhead Storage Unit – Off-Modular
- Cannot be used with slat pads.
- Flipper doors can be field retrofitted with slow close mechanism from eParts.

To Order, Specify:

- 1) Product number, including:

① Locking Option:

- ☐ N Non-locking
- ☐ L Locking, add \$17.82 list.


② Close Option: (Flipper door only)

- ☐ S Slow close, add \$291.74 list.
66" and 72" wide units,
add \$583.48 list.
- ☐ No specification required for standard close.


- 2) Trim color for shelf and end panels.
- 3) Laminate color for door.
- 4) Edgeband color.
- 5) Trim color for lock housing, if applicable.

Adaptable Upper Storage


Overhead Storage Unit, Up Mount – Painted Door



UNGS-PM



UNLS-PM



UNJS-PM

Height	Depth	Width	Flipper Door Number ① ②	Trim A Trim A	Trim B	Trim B Trim A	Trim B
16"(406mm)	14"(356mm)	24"(610mm)	UNGS-1624-PM	\$797.45	\$800.79	\$806.36	\$809.70
		30"(762mm)	UNGS-1630-PM	824.18	828.08	834.20	838.10
		36"(914mm)	UNGS-1636-PM	850.91	855.37	862.04	866.50
		42"(1067mm)	UNGS-1642-PM	877.64	882.66	889.88	894.90
		48"(1219mm)	UNGS-1648-PM	904.37	909.95	917.72	923.30
Height	Depth	Width	Cabinet Door Number ①	Trim A Trim A	Trim B	Trim B Trim A	Trim B
16"(406mm)	14"(356mm)	24"(610mm)	UNLS-1624-PM	\$1359.77	\$1363.11	\$1368.68	\$1372.02
		30"(762mm)	UNLS-1630-PM	1386.50	1390.40	1396.52	1400.42
		36"(914mm)	UNLS-1636-PM	1413.23	1417.69	1424.36	1428.82
		42"(1067mm)	UNLS-1642-PM	1439.96	1444.98	1452.20	1457.22
		48"(1219mm)	UNLS-1648-PM	1504.55	1510.13	1517.90	1523.48
Height	Depth	Width	Single Slider Door Number ①	Trim A Trim A	Trim B	Trim B Trim A	Trim B
16"(406mm)	14"(356mm)	24"(610mm)	UNJS-1624-PM	\$797.45	\$800.79	\$806.36	\$809.70
		30"(762mm)	UNJS-1630-PM	824.18	828.08	834.20	838.10
		36"(914mm)	UNJS-1636-PM	850.91	855.37	862.04	866.50
		42"(1067mm)	UNJS-1642-PM	877.64	882.66	889.88	894.90
		48"(1219mm)	UNJS-1648-PM	904.37	909.95	917.72	923.30

Features

- Includes door front without lock, top shelf, bottom shelf with full back, mounting brackets, end panels, and hardware. Optional locks available.
- Inside dimensions:
 - Height: 12 3/4"(324mm)
 - Depth: 13 1/4"(337mm)
- Up-Mount brackets are color-matched to case.
- Locks are available in black or chrome.
- For lock options, refer to Lock Program Price List.
- Accepts separately specified task lights.
- Safety interlock prevents dislodgement from panel component slots.
- Flipper door stores on top of unit.
- Cabinet Door - 24"-42"(610mm-1067mm) units have two cabinet doors with one lock if locking option is specified.
 - 48"(1219mm) units have four cabinet doors with two locks if locking option is specified.
- Single Slider Door - Door is half the width of the unit.
- Shipped unassembled.
- Available on RUSH with standard close only.

To Order, Specify:

- 1) Product number, including:

① Locking Option:

- ☐ N Non-locking
☐ L Locking, add \$17.82 list.

② Close Option: (Flipper door only)

- ☐ S Slow close, add \$291.74 list.
☐ No specification required for standard close.


- 2) Trim color for shelf and end panels.
 3) Trim color for door.
 4) Trim color for lock housing, if applicable.

Specification Tips


- Must be used with monolithic panels, 16"(406mm) stack kits, or 16"(406mm) stack pads.
- To be installed in connector slots on same size panel or on a combination of panels that equal the width of the storage unit.
- Specify separate shelf gang clip for unbalanced configurations with greater than one row of overhead storage units.
- Units cannot be retrofitted with different door style; ie: flipper doors cannot be changed to cabinet doors.
- Doors cannot be retrofitted with locks.
- Recommended for single row application.
- Recommended for use with 48"-53"(1219mm-1346mm) high panel configurations.
- Using up mount overheads limits allowable panel runs to 10 feet maximum and requires worksurfaces use side-mount brackets, worksurface support panels or other form of floor support. (Fully cantilevered worksurfaces are not allowed). Return panels on each end must equal height of panel run and depth of worksurface.
- Overhead storage units cannot be retrofitted to:
 - Standard Overhead Storage Unit – Off-Modular
 - Standard Overhead Storage Unit
 - Up Mount Overhead Storage Unit – Off-Modular
- Cannot be used with 10"(254mm) stack pads or kits, panel mounted tackboards or slat pads.
- Flipper doors can be field retrofitted with slow close mechanism from eParts.

Adaptable Upper Storage


Overhead Storage Unit, Up Mount – Translucent Door



UNGF-QM



UNLF-QM



UNJF-QM

Height	Depth	Width	Flipper Door Number ① ②	White Trim A	Trim B	Patterned Trim A	Trim B
16"(406mm)	14"(356mm)	24"(610mm)	UNGF-1624-QM	\$1257.41	\$1266.32	\$1524.73	\$1533.64
		30"(762mm)	UNGF-1630-QM	1297.49	1307.51	1564.81	1574.83
		36"(914mm)	UNGF-1636-QM	1337.57	1348.70	1604.89	1616.02
		42"(1067mm)	UNGF-1642-QM	1377.65	1389.89	1644.97	1657.21
		48"(1219mm)	UNGF-1648-QM	1417.73	1431.08	1685.05	1698.40
Height	Depth	Width	Cabinet Door Number ①	White Trim A	Trim B	Patterned Trim A	Trim B
16"(406mm)	14"(356mm)	24"(610mm)	UNLF-1624-QM	\$2075.84	\$2084.75	\$2343.16	\$2352.07
		30"(762mm)	UNLF-1630-QM	2132.63	2142.65	2399.95	2409.97
		36"(914mm)	UNLF-1636-QM	2189.42	2200.55	2456.74	2467.87
		42"(1067mm)	UNLF-1642-QM	2246.21	2258.45	2513.53	2525.77
		48"(1219mm)	UNLF-1648-QM	2321.92	2335.27	2589.24	2602.59
Height	Depth	Width	Single Slider Door Number ①	White Trim A	White Trim B	Patterned Trim A	Patterned Trim B
16"(406mm)	14"(356mm)	24"(610mm)	UNJF-1624-QM	\$1257.41	\$1266.32	\$1524.73	\$1533.64
		30"(762mm)	UNJF-1630-QM	1297.49	1307.51	1564.81	1574.83
		36"(914mm)	UNJF-1636-QM	1337.57	1348.70	1604.89	1616.02
		42"(1067mm)	UNJF-1642-QM	1377.65	1389.89	1644.97	1657.21
		48"(1219mm)	UNJF-1648-QM	1417.73	1431.08	1685.05	1698.40

Features

- Includes door front without lock, top shelf, bottom shelf with full back, mounting brackets, end panels, and hardware. Optional locks available.
- Inside dimensions:
 - Height: 12 3/4"(324mm)
 - Depth: 13 1/4"(337mm)
- Up-Mount brackets are color-matched to case.
- Locks are available in black or chrome.
- For lock options, refer to Lock Program Price List.
- Accepts separately specified task lights.
- Accepts Up Mount Bracket Shelf.
- Safety interlock prevents dislodgement from panel component slots.
- Flipper door stores on top of unit.
- Cabinet Door - 24"-42"(610mm-1067mm) units have two cabinet doors with one lock if locking option is specified.
 - 48"(1219mm) units have four cabinet doors with two locks if locking option is specified.
- Single Slider Door - Door is half the width of the unit.
- Shipped unassembled.

Specification Tips

- Must be used with monolithic panels, 16"(406mm) stack kits, or 16"(406mm) stack pads.**
- To be installed in connector slots on same size panel or on a combination of panels that equal the width of the storage unit.
- Specify separate shelf gang clip for unbalanced configurations with greater than one row of overhead storage units.
- Units cannot be retrofitted with different door style; ie: flipper doors cannot be changed to cabinet doors.
- Doors cannot be retrofitted with locks.
- Recommended for single row application.
- Recommended for use with 48"-53"(1219mm-1346mm) high panel configurations.
- Using up mount overheads limits allowable panel runs to 10 feet maximum and requires worksurfaces use side-mount brackets, worksurface support panels or other form of floor support. (Fully cantilevered worksurfaces are not allowed). Return panels on each end must equal height of panel run and depth of worksurface.
- Overhead storage units cannot be retrofitted to:
 - Standard Overhead Storage Unit – Off-Modular
 - Standard Overhead Storage Unit
 - Up Mount Overhead Storage Unit – Off-Modular
- Cannot be used with 10"(254mm) stack pads or kits, panel mounted tackboards or slat pads.
- Flipper doors can be field retrofitted with slow close mechanism from eParts.

To Order, Specify:

- Product number, including:

① Locking Option:

- ☐ N Non-locking
- ☐ L Locking, add \$17.82 list.


② Close Option: (Flipper door only)

- ☐ S Slow close, add \$291.74 list.
- ☐ No specification required for standard close.


- Trim color for shelf and end panels.
- Translucent color for door.
- Trim color for lock housing, if applicable.

Adaptable Upper Storage


Overhead Storage Unit, Up Mount – Wood Door



UNGS-WM



UNLS-WM



UNJS-WM

Height	Depth	Width	Flipper Door Number ① ②	Wood Group A Trim A	Wood Group A Trim B	Wood Group B Trim A	Wood Group B Trim B
16"(406mm)	14"(356mm)	24"(610mm)	UNGS-1624-WM	\$1278.48	\$1287.39	\$1343.07	\$1351.98
		30"(762mm)	UNGS-1630-WM	1321.92	1331.94	1386.51	1396.53
		36"(914mm)	UNGS-1636-WM	1365.36	1376.49	1429.95	1441.08
		42"(1067mm)	UNGS-1642-WM	1408.80	1421.04	1473.39	1485.63
		48"(1219mm)	UNGS-1648-WM	1452.24	1465.59	1516.83	1530.18

Height	Depth	Width	Cabinet Door Number ①	Wood Group A Trim A	Wood Group A Trim B	Wood Group B Trim A	Wood Group B Trim B
16"(406mm)	14"(356mm)	24"(610mm)	UNLS-1624-WM	\$2196.00	\$2204.91	\$2260.59	\$2269.50
		30"(762mm)	UNLS-1630-WM	2246.13	2256.15	2310.72	2320.74
		36"(914mm)	UNLS-1636-WM	2296.26	2307.39	2360.85	2371.98
		42"(1067mm)	UNLS-1642-WM	2346.39	2358.63	2410.98	2423.22
		48"(1219mm)	UNLS-1648-WM	2416.55	2429.90	2481.14	2494.49

Height	Depth	Width	Single Slider Door Number ①	Wood Group A Trim A	Wood Group A Trim B	Wood Group B Trim A	Wood Group B Trim B
16"(406mm)	14"(356mm)	24"(610mm)	UNJS-1624-WM	\$1278.48	\$1287.39	\$1343.07	\$1351.98
		30"(762mm)	UNJS-1630-WM	1321.92	1331.94	1386.51	1396.53
		36"(914mm)	UNJS-1636-WM	1365.36	1376.49	1429.95	1441.08
		42"(1067mm)	UNJS-1642-WM	1408.80	1421.04	1473.39	1485.63
		48"(1219mm)	UNJS-1648-WM	1452.24	1465.59	1516.83	1530.18

Features

- Includes door front without lock, top shelf, bottom shelf with full back, mounting brackets, end panels, and hardware. Optional locks available.
- Inside dimensions:
 - Height: 12 3/4"(324mm)
 - Depth: 13 1/4"(337mm)
- Up-Mount brackets are color-matched to case.
- Locks are available in black or chrome.
- For lock options, refer to Lock Program Price List.
- Accepts separately specified task lights.
- Accepts Up Mount Bracket Shelf.
- Safety interlock prevents dislodgement from panel component slots.
- Flipper door stores on top of unit.
- Cabinet Door - 24"-42"(610mm-1067mm) units have two cabinet doors with one lock if locking option is specified.
 - 48"(1219mm) units have four cabinet doors with two locks if locking option is specified.
- Single Slider Door - Door is half the width of the unit.
- Shipped unassembled.

Specification Tips

- Must be used with monolithic panels, 16"(406mm) stack kits, or 16"(406mm) stack pads.**
- To be installed in connector slots on same size panel or on a combination of panels that equal the width of the storage unit.
- Specify separate shelf gang clip for unbalanced configurations with greater than one row of overhead storage units.
- Units cannot be retrofitted with different door style; ie: flipper doors cannot be changed to cabinet doors.
- Doors cannot be retrofitted with locks.
- Recommended for single row application.
- Recommended for use with 48"-53"(1219mm-1346mm) high panel configurations.
- Using up mount overheads limits allowable panel runs to 10 feet maximum and requires worksurfaces use side-mount brackets, worksurface support panels or other form of floor support. (Fully cantilevered worksurfaces are not allowed). Return panels on each end must equal height of panel run and depth of worksurface.
- Overhead storage units cannot be retrofitted to:
 - Standard Overhead Storage Unit – Off-Modular
 - Standard Overhead Storage Unit
 - Up Mount Overhead Storage Unit – Off-Modular
- Cannot be used with 10"(254mm) stack pads or kits, panel mounted tackboards or slat pads.
- Flipper doors can be field retrofitted with slow close mechanism from eParts.

To Order, Specify:

- Product number, including:

① Locking Option:

- ☐ N Non-locking
- ☐ L Locking, add \$17.82 list.


② Close Option: (Flipper door only)

- ☐ S Slow close, add \$291.74 list.
- ☐ No specification required for standard close.


- Trim color for shelf and end panels.
- Wood finish for door.
- Trim color for lock housing, if applicable.

Adaptable Upper Storage


Overhead Storage Unit, Up Mount – Laminate Door



UNGS-LM



UNLS-LM



UNJS-LM

Height	Depth	Width	Flipper Door Number ① ②	Laminate A Trim A	Laminate A Trim B	Laminate B Trim A	Laminate B Trim B
16"(406mm)	14"(356mm)	24"(610mm)	UNGS-1624-LM	\$1105.89	\$1114.80	\$1122.60	\$1131.51
		30"(762mm)	UNGS-1630-LM	1152.66	1162.68	1169.37	1179.39
		36"(914mm)	UNGS-1636-LM	1199.43	1210.56	1216.14	1227.27
		42"(1067mm)	UNGS-1642-LM	1246.20	1258.44	1262.91	1275.15
		48"(1219mm)	UNGS-1648-LM	1292.97	1306.32	1309.68	1323.03
Height	Depth	Width	Cabinet Door Number ①	Laminate A Trim A	Laminate A Trim B	Laminate B Trim A	Laminate B Trim B
16"(406mm)	14"(356mm)	24"(610mm)	UNLS-1624-LM	\$1909.84	\$1918.75	\$1926.55	\$1935.46
		30"(762mm)	UNLS-1630-LM	1956.61	1966.63	1973.32	1983.34
		36"(914mm)	UNLS-1636-LM	2003.38	2014.51	2020.09	2031.22
		42"(1067mm)	UNLS-1642-LM	2050.15	2062.39	2066.86	2079.10
		48"(1219mm)	UNLS-1648-LM	2116.95	2130.30	2133.66	2147.01
Height	Depth	Width	Single Slider Door Number ①	Laminate A Trim A	Laminate A Trim B	Laminate B Trim A	Laminate B Trim B
16"(406mm)	14"(356mm)	24"(610mm)	UNJS-1624-LM	\$1105.89	\$1114.80	\$1122.60	\$1131.51
		30"(762mm)	UNJS-1630-LM	1152.66	1162.68	1169.37	1179.39
		36"(914mm)	UNJS-1636-LM	1199.43	1210.56	1216.14	1227.27
		42"(1067mm)	UNJS-1642-LM	1246.20	1258.44	1262.91	1275.15
		48"(1219mm)	UNJS-1648-LM	1292.97	1306.32	1309.68	1323.03

Features

- Includes door front without lock, top shelf, bottom shelf with full back, mounting brackets, end panels, and hardware. Optional locks available.
- Inside dimensions:
 - Height: 12 3/4"(324mm)
 - Depth: 13 1/4"(337mm)
- Up-Mount brackets are color-matched to case.
- Locks are available in black or chrome.
- For lock options, refer to Lock Program Price List.
- Accepts separately specified task lights.
- Accepts Up Mount Bracket Shelf.
- Safety interlock prevents dislodgement from panel component slots.
- Flipper door stores on top of unit.
- Cabinet Door - 24"-42"(610mm-1067mm) units have two cabinet doors with one lock if locking option is specified.
 - 48"(1219mm) units have four cabinet doors with two locks if locking option is specified.
- Single Slider Door - Door is half the width of the unit.
- Shipped unassembled.

Specification Tips

- Must be used with monolithic panels, 16"(406mm) stack kits, or 16"(406mm) stack pads.**
- To be installed in connector slots on same size panel or on a combination of panels that equal the width of the storage unit.
- Specify separate shelf gang clip for unbalanced configurations with greater than one row of overhead storage units.
- Units cannot be retrofitted with different door style; ie: flipper doors cannot be changed to cabinet doors.
- Doors cannot be retrofitted with locks.
- Recommended for single row application.
- Recommended for use with 48"-53"(1219mm-1346mm) high panel configurations.
- Using up mount overheads limits allowable panel runs to 10 feet maximum and requires worksurfaces use side-mount brackets, worksurface support panels or other form of floor support. (Fully cantilevered worksurfaces are not allowed). Return panels on each end must equal height of panel run and depth of worksurface.
- Overhead storage units cannot be retrofitted to:
 - Standard Overhead Storage Unit – Off-Modular
 - Standard Overhead Storage Unit
 - Up Mount Overhead Storage Unit – Off-Modular
- Cannot be used with 10"(254mm) stack pads or kits, panel mounted tackboards or slat pads.
- Flipper doors can be field retrofitted with slow close mechanism from eParts.

To Order, Specify:

- Product number, including:

① Locking Option:

- ☐ N Non-locking
- ☐ L Locking, add \$17.82 list.


② Close Option: (Flipper door only)

- ☐ S Slow close, add \$291.74 list.
- ☐ No specification required for standard close.


- Trim color for shelf and end panels.
- Laminate color for door.
- Edgeband color.
- Trim color for lock housing, if applicable.

Adaptable Upper Storage

Overhead Storage Unit, Standard Off-Modular, Flipper Door



UNFS-PZ
UNFS-WZ
UNFS-LZ



UNFF-QZ

Height	Depth	Width	Painted Door Number	① ②			Trim A	B
16"(406mm)	14"(356mm)	30"(762mm)	UNFS-1630-PZ	<div></div> <div></div>			\$ 978.95	\$ 992.87
		36"(914mm)	UNFS-1636-PZ	<div></div> <div></div>			1005.68	1021.27
		42"(1067mm)	UNFS-1642-PZ	<div></div> <div></div>			1032.41	1049.67
		48"(1219mm)	UNFS-1648-PZ	<div></div> <div></div>			1059.14	1078.07
Height	Depth	Width	Translucent Door Number	①	White Trim A	Trim B	Patterned Trim A	Trim B
16"(406mm)	14"(356mm)	30"(762mm)	UNFF-1630-QZ	<div></div>	\$1317.54	\$1327.56	\$1584.86	\$1594.88
		36"(914mm)	UNFF-1636-QZ	<div></div>	1357.62	1368.75	1624.94	1636.07
		42"(1067mm)	UNFF-1642-QZ	<div></div>	1397.70	1409.94	1665.02	1677.26
		48"(1219mm)	UNFF-1648-QZ	<div></div>	1437.78	1451.13	1705.10	1718.45
Height	Depth	Width	Wood Door Number	①	Wood Group A Trim A	Trim B	Wood Group B Trim A	Trim B
16"(406mm)	14"(356mm)	30"(762mm)	UNFS-1630-WZ	<div></div>	\$1358.67	\$1368.69	\$1423.26	\$1433.28
		36"(914mm)	UNFS-1636-WZ	<div></div>	1402.11	1413.24	1466.70	1477.83
		42"(1067mm)	UNFS-1642-WZ	<div></div>	1445.55	1457.79	1510.14	1522.38
		48"(1219mm)	UNFS-1648-WZ	<div></div>	1488.99	1502.34	1553.58	1566.93
Height	Depth	Width	Laminate Door Number	①	Laminate A Trim A	Trim B	Laminate B Trim A	Trim B
16"(406mm)	14"(356mm)	30"(762mm)	UNFS-1630-LZ	<div></div>	\$1204.99	\$1215.01	\$1221.70	\$1231.72
		36"(914mm)	UNFS-1636-LZ	<div></div>	1251.76	1262.89	1268.47	1279.60
		42"(1067mm)	UNFS-1642-LZ	<div></div>	1298.53	1310.77	1315.24	1327.48
		48"(1219mm)	UNFS-1648-LZ	<div></div>	1345.30	1358.65	1362.01	1375.36

Features

- Includes door front without lock, top shelf, bottom shelf with back stop, end panels, angle adjustment bar, mounting brackets and hardware. Optional locks available.
- Inside dimensions:
 - Height: 12 3/4"(324mm)
 - Depth: 13 1/4"(337mm)
- Locks are available in black or chrome.
- For lock options, refer to Lock Program Price List.
- Accepts separately specified task lights.
- Safety interlock prevents dislodgement from panel component slots.
- Flipper door stores on top of unit.
- Shipped unassembled.

Specification Tips

- Must be used with a monolithic panel or a stackable panel configuration. Stackable panel must have a 16"(406mm) high structural fabric stack pad/kit with a structural cross bar or a 16"(406mm) high slat stack pad/kit with a structural cross bar. Structural cross bar must be at the top of the panel configuration.**
- Foundation element must have grooved top cap.**
- Panel width is not required to match width of off-modular overhead storage unit in an off-modular design.
- Specify separate shelf gang clip for unbalanced configurations with greater than one row of overhead storage units.
- Units cannot be retrofitted with different door style; ie: flipper doors cannot be changed to cabinet doors.
- Doors cannot be retrofitted with locks.
- Off-Modular overhead storage units are designed for single row applications.
- Structural cross bars with appropriate stack pads or kits are recommended on panel spine of off-modular applications for movement of overhead storage unit. Off-modular applications require full-height panel connectors.
- Overhead storage units cannot be retrofitted to:
 - Standard Overhead Storage Unit
 - Up Mount Overhead Storage Unit
 - Up Mount Overhead Storage Unit – Off-Modular
- Cannot be used with 10"(254mm) stack pads and kits.
- Flipper doors can be field retrofitted with slow close mechanism from eParts.

To Order, Specify:

- Product number, including:

① Locking Option:

- N** Non-locking
- L** Locking, add \$17.82 list.


② Close Option: (Flipper door only)

- S** Slow close, add \$291.74 list.
- No specification required for standard close.


- Trim color for shelf and end panels.
- Trim color, translucent color, wood finish or laminate color for door.
- Edgeband color, if applicable.
- Trim color for lock housing, if applicable.

Adaptable Upper Storage

Overhead Storage Unit, Up Mount Off-Modular, Flipper Door



UNGS-PZ
UNGS-WZ
UNGS-LZ



UNGF-QZ

Height	Depth	Width	Painted Door Number ① ②			Trim A	B	
16"(406mm)	14"(356mm)	30"(762mm)	UNGS-1630-PZ			\$1241.75	\$1255.67	
		36"(914mm)	UNGS-1636-PZ			1268.48	1284.07	
		42"(1067mm)	UNGS-1642-PZ			1295.21	1312.47	
		48"(1219mm)	UNGS-1648-PZ			1321.94	1340.87	
Height	Depth	Width	Translucent Door Number ①	White Trim A	Trim B	Patterned Trim A	Trim B	
16"(406mm)	14"(356mm)	30"(762mm)	UNGF-1630-QZ		\$1715.06	\$1725.08	\$1982.38	\$1992.40
		36"(914mm)	UNGF-1636-QZ		1755.14	1766.27	2022.46	2033.59
		42"(1067mm)	UNGF-1642-QZ		1795.22	1807.46	2062.54	2074.78
		48"(1219mm)	UNGF-1648-QZ		1835.30	1848.65	2102.62	2115.97
Height	Depth	Width	Wood Door Number ①	Wood Group A Trim A	Trim B	Wood Group B Trim A	Trim B	
16"(406mm)	14"(356mm)	30"(762mm)	UNGS-1630-WZ		\$1739.49	\$1749.51	\$1804.08	\$1814.10
		36"(914mm)	UNGS-1636-WZ		1782.93	1794.06	1847.52	1858.65
		42"(1067mm)	UNGS-1642-WZ		1826.37	1838.61	1890.96	1903.20
		48"(1219mm)	UNGS-1648-WZ		1869.81	1883.16	1934.40	1947.75
Height	Depth	Width	Laminte Door Number ①	Laminate A Trim A	Trim B	Laminate B Trim A	Trim B	
16"(406mm)	14"(356mm)	30"(762mm)	UNGS-1630-LZ		\$1570.23	\$1580.25	\$1586.94	\$1596.96
		36"(914mm)	UNGS-1636-LZ		1617.00	1628.13	1633.71	1644.84
		42"(1067mm)	UNGS-1642-LZ		1663.77	1676.01	1680.48	1692.72
		48"(1219mm)	UNGS-1648-LZ		1710.54	1723.89	1727.25	1740.60

Features

- Includes door front without lock, top shelf, bottom shelf with full back, end panels, load bar mounting brackets and hardware. Optional locks available.
- Inside dimensions:
 - Height: 12 3/4"(324mm)
 - Depth: 13 1/4"(337mm)
- Locks are available in black or chrome.
- For lock options, refer to Lock Program Price List.
- Accepts separately specified task lights.
- Accepts upmount bracket shelf.
- Safety interlock prevents dislodgement from panel component slots.
- Flipper door stores on top of unit.
- Shipped unassembled.

Specification Tips

- Must be used with a monolithic panel or a stackable panel configuration. Stackable panel must have a 16"(406mm) high structural fabric stack pad/kit with a structural cross bar or a 16"(406mm) high slat stack pad/kit with a structural cross bar. Structural cross bar must be at the top of the panel configuration.**
- Foundation element must have grooved top cap.**
- Panel width is not required to match width of off-modular overhead storage unit in an off-modular design.
- Specify separate shelf gang clip for unbalanced configurations with greater than one row of overhead storage units.
- Units cannot be retrofitted with different door style; ie: flipper doors cannot be changed to cabinet doors.
- Doors cannot be retrofitted with locks.
- Off-Modular overhead storage units are designed for single row applications.
- Recommended for use with 48"-53"(1219mm-1346mm) high panel configurations.
- Structural cross bars with appropriate stack pads or kits are recommended on panel spine of off-modular applications for movement of overhead storage unit. Off-modular applications require full-height panel connectors.
- Overhead storage units cannot be retrofitted to:
 - Standard Overhead Storage Unit
 - Up Mount Overhead Storage Unit
 - Standard Overhead Storage Unit – Off-Modular
- Cannot be used with 10"(254mm) stack pads and kits.
- Flipper doors can be field retrofitted with slow close mechanism from eParts.

To Order, Specify:

- Product number, including:

① Locking Option:

- ☐ N Non-locking
- ☐ L Locking, add \$17.82 list.


② Close Option: (Flipper door only)

- ☐ S Slow close, add \$291.74 list.
- ☐ No specification required for standard close.


- Trim color for shelf and end panels.
- Trim color, translucent color, wood finish or laminate color for door.
- Edgeband color, if applicable.
- Trim color for lock housing, if applicable.

Wall Mount Components


Overhead Storage Unit, Wall Mount – Painted Door



UUFS-PW



UUKS-PW



UUHS-PW

Height	Depth	Width	Flipper Door Number ① ②	Trim A Trim A	Trim B	Trim B Trim A	Trim B
16"(406mm)	14"(356mm)	24"(610mm)	UUFS-1624-PW	\$ 608.14	\$ 611.48	\$ 617.05	\$ 620.39
		30"(762mm)	UUFS-1630-PW	634.87	638.77	644.89	648.79
		36"(914mm)	UUFS-1636-PW	661.60	666.06	672.73	677.19
		42"(1067mm)	UUFS-1642-PW	688.33	693.35	700.57	705.59
		48"(1219mm)	UUFS-1648-PW	715.06	720.64	728.41	733.99
		54"(1372mm)	UUFS-1654-PW	741.79	747.93	756.25	762.39
		60"(1524mm)	UUFS-1660-PW	834.22	840.92	849.79	856.49
		66"(1676mm)	UUFS-1666-PW	1006.81	1014.07	1023.49	1030.75
		72"(1829mm)	UUFS-1672-PW	1189.44	1197.26	1207.23	1215.05

Height	Depth	Width	Cabinet Door Number ①	Trim A Trim A	Trim B	Trim B Trim A	Trim B
16"(406mm)	14"(356mm)	24"(610mm)	UUKS-1624-PW	\$ 994.53	\$ 997.87	\$1003.44	\$1006.78
		30"(762mm)	UUKS-1630-PW	1021.26	1025.16	1031.28	1035.18
		36"(914mm)	UUKS-1636-PW	1047.99	1052.45	1059.12	1063.58
		42"(1067mm)	UUKS-1642-PW	1074.72	1079.74	1086.96	1091.98
		48"(1219mm)	UUKS-1648-PW	1139.31	1144.89	1152.66	1158.24
		54"(1372mm)	UUKS-1654-PW	1242.87	1249.01	1257.33	1263.47
		60"(1524mm)	UUKS-1660-PW	1354.22	1360.92	1369.79	1376.49
		66"(1676mm)	UUKS-1666-PW	1638.17	1645.43	1654.85	1662.11
		72"(1829mm)	UUKS-1672-PW	1911.00	1918.82	1928.79	1936.61

Height	Depth	Width	Single Slider Door Number ①	Trim A Trim A	Trim B	Trim B Trim A	Trim B
16"(406mm)	14"(356mm)	24"(610mm)	UUHS-1624-PW	\$ 608.14	\$ 611.48	\$ 617.05	\$ 620.39
		30"(762mm)	UUHS-1630-PW	634.87	638.77	644.89	648.79
		36"(914mm)	UUHS-1636-PW	661.60	666.06	672.73	677.19
		42"(1067mm)	UUHS-1642-PW	688.33	693.35	700.57	705.59
		48"(1219mm)	UUHS-1648-PW	715.06	720.64	728.41	733.99
		54"(1372mm)	UUHS-1654-PW	741.79	747.93	756.25	762.39
		60"(1524mm)	UUHS-1660-PW	834.22	840.92	849.79	856.49
		66"(1676mm)	UUHS-1666-PW	1006.81	1014.07	1023.49	1030.75
		72"(1829mm)	UUHS-1672-PW	1189.44	1197.26	1207.23	1215.05

Features

- Includes door front without lock, top shelf, bottom shelf with back stop, end panels, mounting bar, angle adjustment bar and hardware. Optional locks available.
- Inside dimensions:
 - Height: 12 3/4"(324mm)
 - Depth: 13 1/4"(337mm)
- Locks are available in black or chrome.
- For lock options, refer to Lock Program Price List.
- Accepts separately specified task lights.
- Safety interlock prevents dislodgement from wall.
- Flipper Door - 66"(1676mm) and 72"(1829mm) units have two doors, one lock per door if locking option is specified.
- Flipper door stores on top of unit.
- Cabinet Door - 24"-42"(610mm-1067mm) units have two cabinet doors with one lock if locking option is specified.
- 48"-72"(1219mm-1829mm) units have four cabinet doors with two locks if locking option is specified.
- Single Slider Door - Door is half the width of the unit.
- Optional non-structural back is available.
- Shipped unassembled.

Available on RUSH with standard close only.

To Order, Specify:

1) Product number, including:

① Locking Option:

- N** Non-locking
- L** Locking, add \$17.82 list.

② Close Option: (Flipper door only)

- S** Slow close, add \$291.74 list. 66" and 72" wide units, add \$583.48 list.
- No specification required for standard close.


- Trim color for shelf and end panels.
- Trim color for door.
- Trim color for lock housing, if applicable.

Specification Tips


- Units cannot be retrofitted with different door style; ie: flipper doors cannot be changed to cabinet doors.
- Doors cannot be retrofitted with locks.
- Must be properly anchored to a structural wall.
- Anchors are not provided, must be field supplied.
- Flipper doors can be field retrofitted with slow close mechanism from eParts.

Wall Mount Components


Overhead Storage Unit, Wall Mount – Translucent Door



UUFF-QW



UUKF-QW



UUHF-QW

Height	Depth	Width	Flipper Door Number ① ②	White Trim A	Trim B	Patterned Trim A	Trim B
16"(406mm)	14"(356mm)	24"(610mm)	UUFF-1624-QW	\$1097.07	\$1105.98	\$1364.39	\$1373.30
		30"(762mm)	UUFF-1630-QW	1137.15	1147.17	1404.47	1414.49
		36"(914mm)	UUFF-1636-QW	1177.23	1188.36	1444.55	1455.68
		42"(1067mm)	UUFF-1642-QW	1217.31	1229.55	1484.63	1496.87
		48"(1219mm)	UUFF-1648-QW	1257.39	1270.74	1524.71	1538.06
		54"(1372mm)	UUFF-1654-QW	1297.47	1311.93	1564.79	1579.25
		60"(1524mm)	UUFF-1660-QW	1434.42	1449.99	1701.74	1717.31
		66"(1676mm)	UUFF-1666-QW	1729.49	1746.17	1996.81	2013.49
		72"(1829mm)	UUFF-1672-QW	1951.09	1968.88	2218.41	2236.20

Height	Depth	Width	Cabinet Door Number ①	White Trim A	Trim B	Patterned Trim A	Trim B
16"(406mm)	14"(356mm)	24"(610mm)	UUKF-1624-QW	\$1650.48	\$1659.39	\$1917.80	\$1926.71
		30"(762mm)	UUKF-1630-QW	1707.27	1717.29	1974.59	1984.61
		36"(914mm)	UUKF-1636-QW	1764.06	1775.19	2031.38	2042.51
		42"(1067mm)	UUKF-1642-QW	1820.85	1833.09	2088.17	2100.41
		48"(1219mm)	UUKF-1648-QW	1896.56	1909.91	2163.88	2177.23
		54"(1372mm)	UUKF-1654-QW	2062.49	2076.95	2329.81	2344.27
		60"(1524mm)	UUKF-1660-QW	2230.62	2246.19	2497.94	2513.51
		66"(1676mm)	UUKF-1666-QW	2659.31	2675.99	2926.63	2943.31
		72"(1829mm)	UUKF-1672-QW	3071.34	3089.13	3338.66	3356.45

Height	Depth	Width	Single Slider Door Number ①	White Trim A	Trim B	Patterned Trim A	Trim B
16"(406mm)	14"(356mm)	24"(610mm)	UUHF-1624-QW	\$1097.07	\$1105.98	\$1364.39	\$1373.30
		30"(762mm)	UUHF-1630-QW	1137.15	1147.17	1404.47	1414.49
		36"(914mm)	UUHF-1636-QW	1177.23	1188.36	1444.55	1455.68
		42"(1067mm)	UUHF-1642-QW	1217.31	1229.55	1484.63	1496.87
		48"(1219mm)	UUHF-1648-QW	1257.39	1270.74	1524.71	1538.06
		54"(1372mm)	UUHF-1654-QW	1297.47	1311.93	1564.79	1579.25
		60"(1524mm)	UUHF-1660-QW	1434.42	1449.99	1701.74	1717.31
		66"(1676mm)	UUHF-1666-QW	1729.49	1746.17	1996.81	2013.49
		72"(1829mm)	UUHF-1672-QW	1951.09	1968.88	2218.41	2236.20

Features

- Includes door front without lock, top shelf, bottom shelf with back stop, end panels, mounting bar, angle adjustment bar, and hardware. Optional locks available.
- Inside dimensions:
 - Height: 12 3/4"(324mm)
 - Depth: 13 1/4"(337mm)
- Locks are available in black or chrome.
- For lock options, refer to Lock Program Price List.
- Accepts separately specified task lights.
- Safety interlock prevents dislodgement from wall.
- Flipper Door - 66"(1676mm) and 72"(1829mm) units have two doors, one lock per door if locking option is specified.
- Flipper door stores on top of unit.
- Cabinet Door - 24"-42"(610mm-1067mm) units have two cabinet doors with one lock if locking option is specified.
- 48"-72"(1219mm-1829mm) units have four cabinet doors with two locks if locking option is specified.
- Single Slider Door - Door is half the width of the unit.
- Optional non-structural back is available.
- Shipped unassembled.

Specification Tips

- Units cannot be retrofitted with different door style; ie: flipper doors cannot be changed to cabinet doors.
- Doors cannot be retrofitted with locks.
- Must be properly anchored to a structural wall.
- Anchors are not provided, must be field supplied.
- Flipper doors can be field retrofitted with slow close mechanism from eParts.

To Order, Specify:

- Product number, including:

① Locking Option:

- ☐ N Non-locking
- ☐ L Locking, add \$17.82 list.


② Close Option: (Flipper door only)

- ☐ S Slow close, add \$291.74 list.
66" and 72" wide units,
add \$583.48 list.
- ☐ No specification required for standard close.


- Trim color for shelf and end panels.
- Translucent color for door.
- Trim color for lock housing, if applicable.

Wall Mount Components


Overhead Storage Unit, Wall Mount – Wood Door



UUFS-WW



UUKS-WW



UUHS-WW

Height	Depth	Width	Flipper Door Number ① ②	Wood Group A Trim A	Trim B	Wood Group B Trim A	Trim B
16"(406mm)	14"(356mm)	24"(610mm)	UUFS-1624-WW	\$1070.25	\$1079.16	\$1134.84	\$1143.75
		30"(762mm)	UUFS-1630-WW	1113.69	1123.71	1178.28	1188.30
		36"(914mm)	UUFS-1636-WW	1157.13	1168.26	1221.72	1232.85
		42"(1067mm)	UUFS-1642-WW	1200.57	1212.81	1265.16	1277.40
		48"(1219mm)	UUFS-1648-WW	1244.01	1257.36	1308.60	1321.95
		54"(1372mm)	UUFS-1654-WW	1287.45	1301.91	1352.04	1366.50
		60"(1524mm)	UUFS-1660-WW	1466.74	1482.31	1531.33	1546.90
		66"(1676mm)	UUFS-1666-WW	1739.56	1756.24	1804.15	1820.83
		72"(1829mm)	UUFS-1672-WW	2034.66	2052.45	2099.25	2117.04

Height	Depth	Width	Cabinet Door Number ①	Wood Group A Trim A	Trim B	Wood Group B Trim A	Trim B
16"(406mm)	14"(356mm)	24"(610mm)	UUKS-1624-WW	\$1779.56	\$1788.47	\$1844.15	\$1853.06
		30"(762mm)	UUKS-1630-WW	1829.69	1839.71	1894.28	1904.30
		36"(914mm)	UUKS-1636-WW	1879.82	1890.95	1944.41	1955.54
		42"(1067mm)	UUKS-1642-WW	1929.95	1942.19	1994.54	2006.78
		48"(1219mm)	UUKS-1648-WW	2000.11	2013.46	2064.70	2078.05
		54"(1372mm)	UUKS-1654-WW	2181.65	2196.11	2246.24	2260.70
		60"(1524mm)	UUKS-1660-WW	2366.52	2382.09	2431.11	2446.68
		66"(1676mm)	UUKS-1666-WW	2817.50	2834.18	2882.09	2898.77
		72"(1829mm)	UUKS-1672-WW	3257.38	3275.17	3321.97	3339.76

Height	Depth	Width	Single Slider Door Number ①	Wood Group A Trim A	Trim B	Wood Group B Trim A	Trim B
16"(406mm)	14"(356mm)	24"(610mm)	UUHS-1624-WW	\$1070.25	\$1079.16	\$1134.84	\$1143.75
		30"(762mm)	UUHS-1630-WW	1113.69	1123.71	1178.28	1188.30
		36"(914mm)	UUHS-1636-WW	1157.13	1168.26	1221.72	1232.85
		42"(1067mm)	UUHS-1642-WW	1200.57	1212.81	1265.16	1277.40
		48"(1219mm)	UUHS-1648-WW	1244.01	1257.36	1308.60	1321.95
		54"(1372mm)	UUHS-1654-WW	1287.45	1301.91	1352.04	1366.50
		60"(1524mm)	UUHS-1660-WW	1466.74	1482.31	1531.33	1546.90
		66"(1676mm)	UUHS-1666-WW	1739.56	1756.24	1804.15	1820.83
		72"(1829mm)	UUHS-1672-WW	2034.66	2052.45	2099.25	2117.04

Features

- Includes door front without lock, top shelf, bottom shelf with back stop, end panels, mounting bar, angle adjustment bar, and hardware. Optional locks available.
- Inside dimensions:
 - Height: 12 3/4"(324mm)
 - Depth: 13 1/4"(337mm)
- Locks are available in black or chrome.
- For lock options, refer to Lock Program Price List.
- Accepts separately specified task lights.
- Safety interlock prevents dislodgement from wall.
- Flipper Door - 66"(1676mm) and 72"(1829mm) units have two doors, one lock per door if locking option is specified.
- Flipper door stores on top of unit.
- Cabinet Door - 24"-42"(610mm-1067mm) units have two cabinet doors with one lock if locking option is specified.
- 48"-72"(1219mm-1829mm) units have four cabinet doors with two locks if locking option is specified.
- Single Slider Door - Door is half the width of the unit.
- Optional non-structural back is available.
- Shipped unassembled.

Specification Tips

- Units cannot be retrofitted with different door style; ie: flipper doors cannot be changed to cabinet doors.
- Doors cannot be retrofitted with locks.
- Must be properly anchored to a structural wall.
- Anchors are not provided, must be field supplied.
- Flipper doors can be field retrofitted with slow close mechanism from eParts.

To Order, Specify:

- Product number, including:

① Locking Option:

- ☐ N Non-locking
- ☐ L Locking, add \$17.82 list.


② Close Option: (Flipper door only)

- ☐ S Slow close, add \$291.74 list.
- 66" and 72" wide units, add \$583.48 list.
- ☐ No specification required for standard close.


- Trim color for shelf and end panels.
- Wood finish for door.
- Trim color for lock housing, if applicable.

Wall Mount Components


Overhead Storage Unit, Wall Mount – Laminate Door



UUFS-LW



UUKS-LW



UUHS-LW

Height	Depth	Width	Flipper Door Number ① ②	Laminate A Trim A	Trim B	Laminate B Trim A	Trim B
16"(406mm)	14"(356mm)	24"(610mm)	UUFS-1624-LW	\$ 918.82	\$ 927.73	\$ 935.53	\$ 944.44
		30"(762mm)	UUFS-1630-LW	965.59	975.61	982.30	992.32
		36"(914mm)	UUFS-1636-LW	1012.36	1023.49	1029.07	1040.20
		42"(1067mm)	UUFS-1642-LW	1059.13	1071.37	1075.84	1088.08
		48"(1219mm)	UUFS-1648-LW	1105.90	1119.25	1122.61	1135.96
		54"(1372mm)	UUFS-1654-LW	1152.67	1167.13	1169.38	1183.84
		60"(1524mm)	UUFS-1660-LW	1267.36	1282.93	1284.07	1299.64
		66"(1676mm)	UUFS-1666-LW	1521.23	1537.91	1537.94	1554.62
		72"(1829mm)	UUFS-1672-LW	1776.24	1794.03	1792.95	1810.74

Height	Depth	Width	Cabinet Door Number ①	Laminate A Trim A	Trim B	Laminate B Trim A	Trim B
16"(406mm)	14"(356mm)	24"(610mm)	UUKS-1624-LW	\$1472.23	\$1481.14	\$1488.94	\$1497.85
		30"(762mm)	UUKS-1630-LW	1519.00	1529.02	1535.71	1545.73
		36"(914mm)	UUKS-1636-LW	1565.77	1576.90	1582.48	1593.61
		42"(1067mm)	UUKS-1642-LW	1612.54	1624.78	1629.25	1641.49
		48"(1219mm)	UUKS-1648-LW	1679.34	1692.69	1696.05	1709.40
		54"(1372mm)	UUKS-1654-LW	1838.58	1853.04	1855.29	1869.75
		60"(1524mm)	UUKS-1660-LW	1995.58	2011.15	2012.29	2027.86
		66"(1676mm)	UUKS-1666-LW	2395.33	2412.01	2412.04	2428.72
		72"(1829mm)	UUKS-1672-LW	2780.63	2798.42	2797.34	2815.13

Height	Depth	Width	Single Slider Door Number ①	Laminate A Trim A	Trim B	Laminate B Trim A	Trim B
16"(406mm)	14"(356mm)	24"(610mm)	UUHS-1624-LW	\$ 918.82	\$ 927.73	\$ 935.53	\$ 944.44
		30"(762mm)	UUHS-1630-LW	965.59	975.61	982.30	992.32
		36"(914mm)	UUHS-1636-LW	1012.36	1023.49	1029.07	1040.20
		42"(1067mm)	UUHS-1642-LW	1059.13	1071.37	1075.84	1088.08
		48"(1219mm)	UUHS-1648-LW	1105.90	1119.25	1122.61	1135.96
		54"(1372mm)	UUHS-1654-LW	1152.67	1167.13	1169.38	1183.84
		60"(1524mm)	UUHS-1660-LW	1267.36	1282.93	1284.07	1299.64
		66"(1676mm)	UUHS-1666-LW	1521.23	1537.91	1537.94	1554.62
		72"(1829mm)	UUHS-1672-LW	1776.24	1794.03	1792.95	1810.74

Features

- Includes door front without lock, top shelf, bottom shelf with back stop, end panels, mounting bar, angle adjustment bar, and hardware. Optional locks available.
- Inside dimensions:
 - Height: 12 3/4"(324mm)
 - Depth: 13 1/4"(337mm)
- Locks are available in black or chrome.
- For lock options, refer to Lock Program Price List.
- Accepts separately specified task lights.
- Safety interlock prevents dislodgement from wall.
- Flipper Door - 66"(1676mm) and 72"(1829mm) units have two doors, one lock per door if locking option is specified.
- Flipper door stores on top of unit.
- Cabinet Door - 24"-42"(610mm-1067mm) units have two cabinet doors with one lock if locking option is specified.
- 48"-72"(1219mm-1829mm) units have four cabinet doors with two locks if locking option is specified.
- Single Slider Door - Door is half the width of the unit.
- Optional non-structural back is available.
- Shipped unassembled.

Specification Tips

- Units cannot be retrofitted with different door style; ie: flipper doors cannot be changed to cabinet doors.
- Doors cannot be retrofitted with locks.
- Must be properly anchored to a structural wall.
- Anchors are not provided, must be field supplied.
- Flipper doors can be field retrofitted with slow close mechanism from eParts.

To Order, Specify:

- Product number, including:

① Locking Option:

- ☐ N Non-locking
- ☐ L Locking, add \$17.82 list.


② Close Option: (Flipper door only)

- ☐ S Slow close, add \$291.74 list.
- 66" and 72" wide units, add \$583.48. list.
- ☐ No specification required for standard close.

- Trim color for shelf and end panels.
- Laminate color for door.
- Edgeband color.
- Trim color for lock housing, if applicable.

Accessories

	Number	Price
Worksurface to Wall Bracket	ZUBW-0000-PN	\$22.50



ZUBW-PN
Class BC – SIN 711-1;
Discount Group XI

Features

- Includes one bracket and worksurface or worksurface support panel mounting screws.
- **Screws/anchors for attachment to wall are field supplied.**
- Worksurface to wall application
 - Partially supports the back of a worksurface in wall mount application when a vertical wall track is not desired.
- Worksurface Support Panel to wall application
 - Attaches a worksurface support panel (ZZFS) to a building wall in a wall mount application when a vertical wall track is not desired.
- Standard in black finish only.

To Order, Specify:


- 1) Product number.
(No finish specification required.)

Specification Tips

- **Must be properly anchored to a structural wall.**
- Worksurface front corners support requirements:
 - One corner must be floor supported.
 - Second corner must be either floor supported or attached to an adjacent worksurface with a flush mount kit.
 - The distance between these floor supports may not exceed 10 feet.

Bracket Requirements

Length of a particular worksurface adjacent to the wall (inches)	Min # of Brackets Required (qty)
12-47	2
48-83	3
84-120	4

Back for Wall Mounted Overhead Storage Unit

UUF-B-P
Class BC – SIN 711-1;
Discount Group XI

Outside Height	Width	Number	Trim A	B
16"(406mm)	24"(610mm)	UUF-B-0024-P	\$ 78.74	\$102.71
	30"(762mm)	UUF-B-0030-P	84.45	108.42
	36"(914mm)	UUF-B-0036-P	90.16	114.13
	42"(1067mm)	UUF-B-0042-P	95.87	119.84
	48"(1219mm)	UUF-B-0048-P	101.58	125.55
	54"(1372mm)	UUF-B-0054-P	107.29	131.26
	60"(1524mm)	UUF-B-0060-P	113.00	136.97
	66"(1676mm)	UUF-B-0066-P	118.71	142.68
	72"(1829mm)	UUF-B-0072-P	124.42	148.39

Features


- Includes one painted back and mounting hardware.
- Used to cover wall mount attachment brackets.

To Order, Specify:

- 1) Product number.
- 2) Trim color.

Specification Tips

- For use on Wall Mount Overhead Storage Units only.
- Back must match width of Wall Mounted Overhead Storage Units.

Shelf Dividers

NADR-8
Class CA – SIN 711-1;
Discount Group I

Height	Depth	Width	Number	Trim A	B
4"(102mm)	13 1/4"(337mm)	1 3/4"(44mm)	NADR-8	\$193.46	\$206.95

Features


- Includes box of eight shelf dividers.
- To be used to divide space laterally on panel mounted shelves or up mount shelves, standard or up mount overhead storage units.
- ◆ Available on RUSH.

To Order, Specify:

- 1) Product number.
- 2) Trim color.

Lighting

	Height	Depth	Width	Actual Width	Number	Price
Adaptable Electronic Ballast Task Light (Add-On Light)	1 3/8"(35mm)	4 1/4"(108mm)	42"(1067mm)	15" Linking Cord	LUTD-0042-11UEP	\$242.42
				48" Linking Cord	LUTD-0042-14UEP	247.88
			54"(1372mm)	15" Linking Cord	LUTD-0054-11UEP	\$255.52
				48" Linking Cord	LUTD-0054-14UEP	260.98



LUTD



NOTE:
Must be attached to a starter light or another add-on light.

Features

- Includes mounting brackets, linking power cord, prismatic lens, low mercury content, and T-8 fluorescent lamp with 3500k color temperature.
- Does not include a power plug.
- Available in charcoal only.

Specification Tips

- **A task light may be of equal or less width than the unit to which it is attached but may not span across adjacent units.**
- Task lights may be adjusted front-to-back on metal shelf hanger bars.
- If task light is less than the width of the unit to which it is attached, it may also be adjusted side-to-side.
- A maximum of 5 task lights may be daisy chained together including the starter light and/or not to exceed 20' of overall task light run.
- Choose add-on light with appropriate linking cord length to eliminate excess cord.


To Order, Specify:

- 1) Product number.
(No finish specification required.)

Batwing Lens Specification:


To specify, replace **P** with **B** in the product number and add **\$18.56** list.

Example: LUTD-0042-11UEB

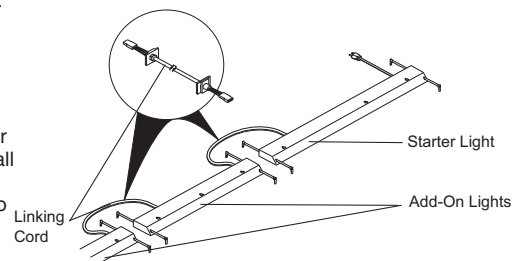

Belong® Work Tools
Markerboard Accessories

	Description	Number	Price
Markerboard Accessories	Dry Erase Marker Kit (holder, six markers and eraser)	7062-8001	\$115.73
	Cleaner and Conditioner	7031-7001	125.58
	Spray Cleaner	7031-7002	42.18



7062-8001



7031-7002



7031-7001

Feature

- Recommended dry erase marker products to maintain, clean & condition markerboards.



To Order, Specify:

- 1) Product number
(No finish specification required.)

Concentrative Tables

Tri Tables — 120° with Glides or Casters

User Depth	Width	T-Mold Edge Number	Laminate A	B	Cascade Edge Number	Laminate A Cascade A	Cascade B	Laminate B Cascade A	Cascade B
26"(660mm)	36"(914mm)	NCTO-36-LFG	\$1314.02	\$1405.26	NCTO-36-LVG	\$1363.79	\$1426.59	\$1455.03	\$1517.83
28"(711mm)	42"(1067mm)	NCTO-42-LFG	1366.15	1462.13	NCTO-42-LVG	1415.92	1478.72	1511.90	1574.70
30"(762mm)	48"(1219mm)	NCTO-48-LFG	1418.28	1514.26	NCTO-48-LVG	1468.05	1530.85	1564.03	1626.83
34"(864mm)	60"(1524mm)	NCTO-60-LFG	1522.54	1618.52	NCTO-60-LVG	1572.31	1635.11	1668.29	1731.09

NCTO-LFG
NCTO-LVG

Features

- Includes worksurface, three angled legs with sleeved glides, and mounting hardware.
- Laminate surface with T-mold edge or cascade vinyl edge (solid or translucent).
- 6"(152mm) adjustment range allows table heights from 26"(660mm) to 32"(813mm).
- 16"(406mm) dimension applies to all table widths.
- Shipped unassembled.

Available on RUSH.

To Order, Specify:



- Product number.
- Laminate color for surface.
- Edge trim color.
- Leg/upper leg sleeve(s) trim color.

Note: \$24.42 upcharge list for Metallic or accent trim color.

Specification Tips

- Tables are predrilled to accommodate desk-mounted screens and **stand alone** with and without modesty.
- Does not accept AKP's.
- Desktop port can be attached to table.
- Worksurface reinforcement channel is shipped with 48"(1219mm) and 60"(1524mm)-wide tables.
- Specify trim color for upper leg sleeves. Lower sleeves are standard in black finish color only.

26"(660mm)	36"(914mm)	NCTO-36-LFM	\$1462.13	\$1553.37	NCTO-36-LVM	\$1511.90	\$1574.70	\$1603.14	\$1665.94
28"(711mm)	42"(1067mm)	NCTO-42-LFM	1514.26	1610.24	NCTO-42-LVM	1564.03	1626.83	1660.01	1722.81
30"(762mm)	48"(1219mm)	NCTO-48-LFM	1566.39	1662.37	NCTO-48-LVM	1616.16	1678.96	1712.14	1774.94
34"(864mm)	60"(1524mm)	NCTO-60-LFM	1670.65	1766.63	NCTO-60-LVM	1720.42	1783.22	1816.40	1879.20

NCTO-LFM
NCTO-LVM

Features

- Includes worksurface, three angled legs, two with locking casters, and mounting hardware.
- Laminate surface with T-mold edge or cascade vinyl edge (solid or translucent).
- 5"(127mm) adjustment range allows table heights from 27"(686mm) to 32"(813mm) in 1"(25mm) increments.
- 16"(406mm) dimension applies to all table widths.
- Shipped unassembled.

Available on RUSH.

To Order, Specify:

- Product number.
- Laminate color for surface.
- Edge trim color.
- Leg/upper leg sleeve(s) trim color.

Note: \$24.42 upcharge list for Metallic or accent trim color.


Specification Tips

- Tables are predrilled to accommodate desk-mounted screens and **stand alone** with and without modesty.
- Does not accept AKP's.
- Desktop port can be attached to table.
- Worksurface reinforcement channel is shipped with 48"(1219mm)-wide tables.
- Specify trim color for upper leg sleeves. Lower sleeves and casters are standard in black finish color only.


Concentrative Tables

Tri Tables — 90° with Glides or Casters

User Depth	Width	T-Mold Edge Number	Laminate A	B	Cascade Edge Number	Laminate A Cascade A	Cascade B	Laminate B Cascade A	Cascade B
28"(711mm)	36"(914mm)	NCTN-36-LFG	\$1259.52	\$1350.76	NCTN-36-LVG	\$1309.29	\$1372.09	\$1400.53	\$1463.33
31"(787mm)	42"(1067mm)	NCTN-42-LFG	1311.65	1407.63	NCTN-42-LVG	1361.42	1424.22	1457.40	1520.20
34"(864mm)	48"(1219mm)	NCTN-48-LFG	1363.78	1459.76	NCTN-48-LVG	1413.55	1476.35	1509.53	1572.33
40"(1016mm)	60"(1524mm)	NCTN-60-LFG	1468.04	1564.02	NCTN-60-LVG	1517.81	1580.61	1613.79	1676.59



NCTN-LFG
NCTN-LVG



Features

- Includes worksurface, three angled legs with sleeved glides, and mounting hardware.
- Laminate surface with T-mold edge or cascade vinyl edge (solid or translucent).
- 6"(152mm) adjustment range allows table heights from 26"(660mm) to 32"(813mm).
- 16"(406mm) dimension applies to all table widths.
- Shipped unassembled.

Available on RUSH.

To Order, Specify:


- Product number.
- Laminate color for surface.
- Edge trim color.
- Leg/upper leg sleeve(s) trim color.

Note: \$24.42 upcharge list for Metallic or accent trim color.


Specification Tips

- Tables are predrilled to accommodate desk-mounted screens; **stand alone** kits, with and without modesty.
- AKP's can be mounted on 48"(1219mm) and 60"(1524mm)-wide tables.
- Desktop port can be attached to table.
- Specify trim color for upper leg sleeves. Lower sleeves are standard in black finish color only.

28"(711mm)	36"(914mm)	NCTN-36-LFM	\$1407.63	\$1498.87	NCTN-36-LVM	\$1457.40	\$1520.20	\$1548.64	\$1611.44
31"(787mm)	42"(1067mm)	NCTN-42-LFM	1459.76	1555.74	NCTN-42-LVM	1509.53	1572.33	1605.51	1668.31
34"(864mm)	48"(1219mm)	NCTN-48-LFM	1511.89	1607.87	NCTN-48-LVM	1561.66	1624.46	1657.64	1720.44
40"(1016mm)	60"(1524mm)	NCTN-60-LFM	1616.15	1712.13	NCTN-60-LVM	1665.92	1728.72	1761.90	1824.70



NCTN-LFM
NCTN-LVM



Features

- Includes worksurface, three angled legs, two with locking casters, and mounting hardware.
- Laminate surface with T-mold edge or cascade vinyl edge (solid or translucent).
- 5"(127mm) adjustment range allows table heights from 27"(686mm) to 32"(813mm) in 1"(25mm) increments.
- 16"(406mm) dimension applies to all table widths.
- Shipped unassembled.

Available on RUSH.

To Order, Specify:

- Product number.
- Laminate color for surface.
- Edge trim color.
- Leg/upper leg sleeve(s) trim color.

Note: \$24.42 upcharge list for Metallic or accent trim color.



Specification Tips

- Tables are predrilled to accommodate desk-mounted screens; **stand alone** kits, with and without modesty.
- AKP's can be mounted on 48"(1219mm) and 60"(1524mm)-wide tables.
- Desktop port can be attached to table.
- Specify trim color for upper leg sleeves. Lower sleeves and casters are standard in black finish color only.

Concentrative Tables

Tri Tables — 60° with Glides or Casters

User Depth	Width	T-Mold Edge Number	Laminate A	B	Cascade Edge Number	Laminate A Cascade A	Cascade B	Laminate B Cascade A	Cascade B
42"(1067mm)	48"(1219mm)	NCTT-48-LFG	\$1246.47	\$1342.45	NCTT-48-LVG	\$1296.24	\$1359.04	\$1392.22	\$1455.02
52"(1321mm)	60"(1524mm)	NCTT-60-LFG	1350.73	1446.71	NCTT-60-LVG	1400.50	1463.30	1496.48	1559.28

NCTT-LFG
NCTT-LVG

Features

- Includes worksurface, three angled legs with sleeved glides, and mounting hardware.
- Laminate surface with T-mold edge or cascade vinyl edge (solid or translucent).
- 6"(152mm) adjustment range allows table heights from 26"(660mm) to 32"(813mm).
- 15 1/2"(394mm) dimension applies to all table widths.
- Shipped unassembled.

Available on RUSH.

To Order, Specify:



- Product number.
- Laminate color for surface.
- Edge trim color.
- Leg/upper leg sleeve(s) trim color.

Note: \$24.42 upcharge list for Metallic or accent trim color.

Specification Tips

- Tables are predrilled to accommodate stand alone desk-mounted screens; **stand alone** kit, with and without modesty.
- AKP's can be mounted on tables.
- Desktop port can be attached to table.
- Specify trim color for upper leg sleeves. Lower sleeves are standard in black finish color only.

42"(1067mm)	48"(1219mm)	NCTT-48-LFM	\$1394.58	\$1490.56	NCTT-48-LVM	\$1444.35	\$1507.15	\$1540.33	\$1603.13
52"(1321mm)	60"(1524mm)	NCTT-60-LFM	1498.84	1594.82	NCTT-60-LVM	1548.61	1611.41	1644.59	1707.39

NCTT-LFM
NCTT-LVM

Features

- Includes worksurface, three angled legs, two with locking casters, and mounting hardware.
- Laminate surface with T-mold edge or cascade vinyl edge (solid or translucent).
- 5"(127mm) adjustment range allows table heights from 27"(686mm) to 32"(813mm) in 1"(25mm) increments.
- 15 1/2"(394mm) dimension applies to all table widths.
- Shipped unassembled.

Available on RUSH.

To Order, Specify:

- Product number.
- Laminate color for surface.
- Edge trim color.
- Leg/upper leg sleeve(s) trim color.

Note: \$24.42 upcharge list for Metallic or accent trim color.

Specification Tips

- Tables are predrilled to accommodate stand alone desk-mounted screens; **stand alone** kit, with and without modesty.
- AKP's can be mounted on tables.
- Desktop port can be attached to table.
- Specify trim color for upper leg sleeves. Lower sleeves and casters are standard in black finish color only.


Concentrative Tables

Tri Tables — Collaborative with Glides or Casters

User Depth	Width	T-Mold Edge Number ①	Laminate A	B	Cascade Edge Number ①	Laminate A Cascade A	Cascade B	Laminate B Cascade A	Cascade B
42"(1067mm)	36"(914mm)	NCTC-36-LFGN ■	\$1130.36	\$1220.79	NCTC-36-LVGN ■	\$1181.31	\$1244.11	\$1271.74	\$1334.54
	42"(1067mm)	NCTC-42-LFG ■	1180.14	1273.51	NCTC-42-LVG ■	1231.09	1304.36	1324.46	1397.73
	48"(1219mm)	NCTC-48-LFG ■	1216.88	1313.19	NCTC-48-LVG ■	1267.83	1351.57	1364.14	1447.88
44"(1118mm)	60"(1524mm)	NCTC-60-LFG ■	\$1305.77	\$1409.19	NCTC-60-LVG ■	\$1356.72	\$1461.40	\$1460.14	\$1564.82



NCTC-LFG
NCTC-LVG



Features

- Includes worksurface, three angled legs with sleeved glides, and mounting hardware.
- Laminate surface with T-mold edge or cascade vinyl edge (solid or translucent).
- 6"(152mm) adjustment range allows table heights from 26"(660mm) to 32"(813mm).
- Shipped unassembled.
- Available on RUSH.

Specification Tips

- 36"(914mm) width table is non-handed. All other sizes require left-hand or right-hand specification.
- Tables are predrilled to accommodate stand alone desk-mounted screens without modesty.
- AKP's can be mounted on 48"(1219mm) and 60"(1524mm)-wide tables.
- Desktop port can be attached to table.
- Specify trim color for upper leg sleeves. Lower sleeves are standard in black finish color only.

To Order, Specify:

- Product number, including:

① Worksurface Orientation:

- L** Left-hand configuration
- R** Right-hand configuration


- Laminate color for surface.
- Edge trim color.
- Leg/upper leg sleeve(s) trim color.

Note: \$24.42 upcharge list for Metallic or accent trim color.

42"(1067mm)	36"(914mm)	NCTC-36-LFMN ■	\$1279.65	\$1370.08	NCTC-36-LVMN ■	\$1330.60	\$1393.40	\$1421.03	\$1483.83
	42"(1067mm)	NCTC-42-LFM ■	1329.43	1422.80	NCTC-42-LVM ■	1380.38	1453.65	1473.75	1547.02
	48"(1219mm)	NCTC-48-LFM ■	1366.17	1462.48	NCTC-48-LVM ■	1417.12	1500.86	1513.43	1597.17
44"(1118mm)	60"(1524mm)	NCTC-60-LFM ■	\$1455.06	\$1558.48	NCTC-60-LVM ■	\$1506.01	\$1610.69	\$1609.43	\$1714.11



NCTC-LFM
NCTC-LVM



Features

- Includes worksurface, three angled legs, two with locking casters, and mounting hardware.
- Laminate surface with T-mold edge or cascade vinyl edge (solid or translucent).
- 5"(127mm) adjustment range allows table heights from 26"(660mm) to 32"(813mm) in 1"(25mm) increments.
- Shipped unassembled.
- Available on RUSH.

Specification Tips

- 36"(914mm) width table is non-handed. All other sizes require left-hand or right-hand specification.
- Tables are predrilled to accommodate stand alone desk-mounted screens without modesty.
- AKP's can be mounted on 48"(1219mm) and 60"(1524mm)-wide tables.
- Desktop port can be attached to table.
- Specify trim color for upper leg sleeves. Lower sleeves and casters are standard in black finish color only.

To Order, Specify:

- Product number, including:

① Worksurface Orientation:

- L** Left-hand configuration
- R** Right-hand configuration


- Laminate color for surface.
- Edge trim color.
- Leg/upper leg sleeve(s) trim color.

Note: \$24.42 upcharge list for Metallic or accent trim color.

Concentrative Tables

Tri Tables — Symmetric with Glides or Casters

Width	T-Mold Edge Number	Laminate A	B	Cascade Edge Number	Laminate A Cascade A	Cascade B	Laminate B Cascade A	Cascade B
36"(914mm)	NCTY-36-LFG	\$1028.43	\$1095.10	NCTY-36-LVG	\$1079.62	\$1130.82	\$1146.29	\$1197.49
42"(1067mm)	NCTY-42-LFG	1080.27	1146.94	NCTY-42-LVG	1131.46	1182.66	1198.13	1249.33
48"(1219mm)	NCTY-48-LFG	1132.11	1198.78	NCTY-48-LVG	1183.30	1234.50	1249.97	1301.17
60"(1524mm)	NCTY-60-LFG	1235.79	1302.46	NCTY-60-LVG	1286.98	1338.18	1353.65	1404.85

NCTY-LFG
NCTY-LVG

Features

- Includes worksurface, three angled legs with sleeved glides, and mounting hardware.
- Laminate surface with T-mold edge or cascade vinyl edge (solid or translucent).
- 6"(152mm) adjustment range allows table heights from 26"(660mm) to 32"(813mm).
- Shipped unassembled.
- Available on RUSH.

To Order, Specify:


- Product number.
- Laminate color for surface.
- Edge trim color.
- Leg/upper leg sleeve(s) trim color.

Note: \$24.42 upcharge list for Metallic or accent trim color.

Specification Tips

- Tables are predrilled to accommodate stand alone desk-mounted screens without modesty.
- Does not accept AKP's.
- Desktop port can be attached to table.
- Specify trim color for upper leg sleeves. Lower sleeves are standard in black finish color only.

36"(914mm)	NCTY-36-LFM	\$1178.44	\$1245.11	NCTY-36-LVM	\$1229.63	\$1280.83	\$1296.30	\$1347.50
42"(1067mm)	NCTY-42-LFM	1230.28	1296.95	NCTY-42-LVM	1281.47	1332.67	1348.14	1399.34
48"(1219mm)	NCTY-48-LFM	1282.12	1348.79	NCTY-48-LVM	1333.31	1384.51	1399.98	1451.18
60"(1524mm)	NCTY-60-LFM	1385.80	1452.47	NCTY-60-LVM	1436.99	1488.19	1503.66	1554.86

NCTY-LFM
NCTY-LVM

Features

- Includes worksurface, three angled legs, two with locking casters, and mounting hardware.
- Laminate surface with T-mold edge or cascade vinyl edge (solid or translucent).
- 5"(127mm) adjustment range allows table heights from 27"(686mm) to 32"(813mm) in 1"(25mm) increments.
- Shipped unassembled.
- Available on RUSH.

To Order, Specify:

- Product number.
- Laminate color for surface.
- Edge trim color.
- Leg/upper leg sleeve(s) trim color.

Note: \$24.42 upcharge list for Metallic or accent trim color.

Specification Tips

- Tables are predrilled to accommodate stand alone desk-mounted screens without modesty.
- Does not accept AKP's.
- Desktop port can be attached to table.
- Specify trim color for upper leg sleeves. Lower sleeves and casters are standard in black finish color only.


Concentrative Tables

Tri Tables — Asymmetric with Glides or Casters

Width	T-Mold Edge Number ①	Laminate A	B	Cascade Edge Number ①	Laminate A Cascade A	Cascade B	Laminate B Cascade A	Cascade B
36"(914mm)	NCTA-36-LFG	\$1199.09	\$1295.02	NCTA-36-LVG	\$1250.04	\$1312.84	\$1345.97	\$1408.77
42"(1067mm)	NCTA-42-LFG	1246.61	1346.34	NCTA-42-LVG	1297.56	1370.83	1397.29	1470.56
48"(1219mm)	NCTA-48-LFG	1294.13	1397.66	NCTA-48-LVG	1345.08	1428.82	1448.61	1532.35
60"(1524mm)	NCTA-60-LFG	1389.17	1500.30	NCTA-60-LVG	1440.12	1544.80	1551.25	1655.93



NCTA-LFG
NCTA-LVG



Features

- Includes worksurface, three angled legs with sleeved glides, and mounting hardware.
- Laminate surface with T-mold edge or cascade vinyl edge (solid or translucent).
- 6"(152mm) adjustment range allows table heights from 26"(660mm) to 32"(813mm).
- Shipped unassembled.
- Available on RUSH.

Specification Tips

- Tables are predrilled to accommodate stand alone desk-mounted screens without modesty.
- Does not accept AKP's.
- Desktop port can be attached to table.
- Specify trim color for upper leg sleeves. Lower sleeves are standard in black finish color only.

To Order, Specify:

- Product number, including:

① Worksurface Orientation:

- L** Left-hand configuration
R Right-hand configuration


- Laminate color for surface.
- Edge trim color.
- Leg/upper leg sleeve(s) trim color.

Note: \$24.42 upcharge list for Metallic or accent trim color.

36"(914mm)	NCTA-36-LFM	\$1348.38	\$1444.31	NCTA-36-LVM	\$1399.33	\$1462.13	\$1495.26	\$1558.06
42"(1067mm)	NCTA-42-LFM	1395.90	1495.63	NCTA-42-LVM	1446.85	1520.12	1546.58	1619.85
48"(1219mm)	NCTA-48-LFM	1443.42	1546.95	NCTA-48-LVM	1494.37	1578.11	1597.90	1681.64
60"(1524mm)	NCTA-60-LFM	1538.46	1649.59	NCTA-60-LVM	1589.41	1694.09	1700.54	1805.22



NCTA-LFM
NCTA-LVM



Features

- Includes worksurface, three angled legs, two with locking casters, and mounting hardware.
- Laminate surface with T-mold edge or cascade vinyl edge (solid or translucent).
- 5"(127mm) adjustment range allows table heights from 27"(686mm) to 32"(813mm) in 1"(25mm) increments.
- Shipped unassembled.
- Available on RUSH.

Specification Tips

- Tables are predrilled to accommodate stand alone desk-mounted screens without modesty.
- Does not accept AKP's.
- Desktop port can be attached to table.
- Specify trim color for upper leg sleeves. Lower sleeves and casters are standard in black finish color only.

To Order, Specify:

- Product number, including:

① Worksurface Orientation:

- L** Left-hand configuration
R Right-hand configuration

- Laminate color for surface.
- Edge trim color.
- Leg/upper leg sleeve(s) trim color.

Note: \$24.42 upcharge list for Metallic or accent trim color.

Tables

Round / Rectangular

	Height	Diameter	Laminate Top Number	Laminate A	Laminate B	Wood Top Number	Wood Group A	Wood Group B
Round — Laminate or Wood Top	29"(737mm)	35 3/4"(908mm)	NCCL-36	\$ 778.65	\$ 845.32	NCCW-36	\$1366.72	\$1401.44
		41 3/4"(1060mm)	NCCL-42 ■	862.71	932.17	NCCW-42	1519.10	1562.82
		47 3/4"(1213mm)	NCCL-48 ■	1025.11	1113.08	NCCW-48	1813.16	1874.26

NCCL
NCCW**Features**

- Laminate top with T-mold edge; wood veneer top and 3mm wood edge.
- Self adjusting glides.
- Column is 2 1/4"(57mm) thick.
- Available on RUSH.


To Order, Specify:**Laminate Top Table**

- 1) Product number.
- 2) Laminate color for top.
- 3) Edge trim color.
- 4) Trim color for base and column.

Wood Top Table

- 1) Product number.
- 2) Wood finish for top and edge.
- 3) Trim color for base and column.

Note: Upcharge list for Metallic trim color
Base and column = **\$19.05.**

Rectangular — Laminate or Wood TopNCRL
NCRW

	Height	Depth	Width	Laminate Top Number	Laminate A	Laminate B	Wood Top Number	Wood Group A	Wood Group B
	29"(737mm)	30"(762mm)	60"(1524mm)	NCRL-3060 ■	\$1136.33	\$1136.33	NCRW-3060	\$1944.36	\$1996.84
			72"(1829mm)	NCRL-3072 ■	1204.47	1211.27	NCRW-3072	2118.08	2181.00
		36"(914mm)	72"(1829mm)	NCRL-3672 ■	\$1280.19	\$1295.15	NCRW-3672	\$2296.64	\$2370.24

Features

- Laminate top with T-mold edge; wood veneer top and 3mm wood edge.
- Self-adjusting glides.
- NCRL-3060 clearance from edge of table to center of column is 15"(381mm).
- Column is 2 1/4"(57mm) thick.
- Available on RUSH.

Note: Separately specified worksurface reinforcement channels provide additional support for laminate or wood worksurfaces with 54"(1372mm) spans that are heavily loaded and not otherwise supported by mid-span cantilevers, worksurface supports, legs, or under-worksurface storage.

To Order, Specify:**Laminate Top Table**

- 1) Product number.
- 2) Laminate color for top.
- 3) Edge trim color.
- 4) Trim color for base and column.

Wood Top Table

- 1) Product number.
- 2) Wood finish for top and edge.
- 3) Trim color for base and column.

Note: Upcharge list for Metallic trim color
Base and column = **\$19.05.**

Tables

Teardrop / Bean / Bend

	Height	Depth	Width	Glides/Casters	Number	Laminate A	B
Teardrop — Laminate Top	29"(737mm)	24"(610mm)	33 1/2"(851mm)	Glides	NCOL-24	\$ 962.00	\$1034.78
		30"(762mm)	42"(1067mm)	Glides	NCOL-30	1158.45	1237.84
	29"(737mm)	24"(610mm)	33 1/2"(851mm)	Casters	NCOL-24-C	\$ 962.00	\$1034.78
		30"(762mm)	42"(1067mm)	Casters	NCOL-30-C	1158.45	1237.84



NCOL



NCOL-C

Features

- Laminate top with 3mm edgeband edge.
- Self-adjusting glides or dual-wheel hard casters.
- Straight edges are 24"(610mm) and 30"(762mm) respectively, and are designed to pull up to the end of a 24"(610mm) or 30"(762mm) deep worksurface.

NOTE:

These tables are freestanding and lack the height adjustability of the panel system. They are not recommended for use directly adjacent to workspaces.

To Order, Specify:


- 1) Product number.
- 2) Laminate color for top.
- 3) Edge trim color.
- 4) Trim color for base, column and casters.

Notes: Casters will be charcoal when Metallic trim color is ordered.


Upcharge list for Metallic trim color
Base and column = **\$19.05.**

Bean — Laminate Top

27"-31" (686mm-787mm)	24"(610mm)	36"(914mm)	Glides	NCBL-2436-4	\$ 966.76	\$1033.43
		48"(1219mm)	Glides	NCBL-2448-4	1117.96	1184.63
27"-31" (686mm-787mm)	24"(610mm)	36"(914mm)	Casters	NCBL-2436-4C	\$ 966.76	\$1033.43
		48"(1219mm)	Casters	NCBL-2448-4C	1117.96	1184.63



NCBL-2436-4



NCBL-2436-4C

Features

- Includes top, legs, and mounting hardware.
- Laminate top with T-mold edge.
- 4"(102mm) glide or caster adjustment range allows worktop heights from 27"(686mm) to 31"(787mm).
- Available with glides or casters (two locking, two non-locking).
- Legs standard in charcoal finish color only.
- Shipped unassembled.

To Order, Specify:


- 1) Product number.
- 2) Laminate color for top.
- 3) Edge trim color.

Specification Tip


- Does not accept AKP's.

Bend — Laminate Top

27"-31" (686mm-787mm)	32"(813mm)	42"(1067mm)	Glides	NCDL-3242-4	\$1088.20	\$1154.87
	33"(838mm)	56"(1422mm)	Glides	NCDL-3356-4	1217.96	1284.63
27"-31" (686mm-787mm)	32"(813mm)	42"(1067mm)	Casters	NCDL-3242-4C	\$1088.20	\$1154.87
	33"(838mm)	56"(1422mm)	Casters	NCDL-3356-4C	1217.96	1284.63



NCDL-3242-4



NCDL-3242-4C

Features

- Includes top, legs, and mounting hardware.
- Laminate top with T-mold edge.
- 4"(102mm) glide or caster adjustment range allows worktop heights from 27"(686mm) to 31"(787mm).
- Available with glides or casters (two locking, two non-locking).
- Legs standard in charcoal finish color only.
- Shipped unassembled.

To Order, Specify:

- 1) Product number.
- 2) Laminate color for top.
- 3) Edge trim color.


Specification Tip

- Does not accept AKP's.

This page intentionally blank


X Series Attached Pedestals

Pencil/Pencil/Box/File — Attached




JPAQ-24

Box/Box/File — Attached



JPAH-24

File/File — Attached



JPAJ-24

Features

- Includes steel pedestal and attachment hardware.
- Pencil drawers include one pencil tray for each pedestal.
- Box drawers include one divider in each drawer.
- File drawers include one compressor in each drawer.
- Drawer interiors and accessories are black finish color.
- All drawers have full extension steel ball-bearing slides.
- Standard with lock.
- For lock options, refer to Lock Programs Price List.
- Glides provide 1”(25mm) adjustment range.
- **Attached units must be attached** under a worksurface equal to or deeper than pedestal depth.
- Wood drawer front lockbar options include wood front with painted steel lockbar or wood front with wood lockbar.
- Optional drawer fronts include painted or wood.
- Wood drawer front with J-Pull: J-Pull trim color matches case trim color.
- Optional drawer pulls include Ellipse, Radius, Taper, Crescent, Linear, Classic, J-Pull and Integral.
 - Integral pull (G) available with painted steel fronts only.
 - Ellipse pull available in non-Metallic trim colors only.
 - Radius pull available in Metallic trim colors only.
 - Taper, J-Pull and Integral pull trim color matches case trim color.
 - Crescent, Linear and Classic pulls are brushed nickel finish.

◆ Available on RUSH.

Specification Tips

- Refer to appropriate price book for specification requirements.
- Use corner brackets and/or cantilevers to attach the worksurface to the panel.
- Specify worksurface height adjustment kit if mounting worksurface up to 2”(51mm) higher than standard mounting height; specify separately.
- Not for use with 18”(457mm) deep worksurface with knife edge.

To Order, Specify:

Painted Drawer Fronts

- 1) Product number, including:

① Drawer Front Style:

S Painted ◆

② Pull (see side bar)

- 2) Trim color for drawer fronts and case.
- 3) Trim color for pull (Ellipse and Radius only).
 - Ellipse (Non-Metallic trim colors only)
 - Radius (Metallic trim colors only; upcharge for Metallic trim on pull is included in price.)
- 4) Trim color for lock plug.

Wood Drawer Fronts

- 1) Product number, including:

① Lockbar Option:

- W** Wood/steel lockbar
- R** Wood/wood lockbar, add **\$83.20** list

② Pull (see side bar)

- 2) Trim color for case.
- 3) Trim color for pull (Ellipse and Radius only).
 - Ellipse (Non-Metallic trim colors only)
 - Radius (Metallic trim colors only; upcharge for Metallic trim on pull is included in price.)
- 4) Wood finish for drawer fronts.
- 5) Trim color for lock plug.

② Pull Styles

1 Ellipse (1)

7 Crescent (7)

2 Radius (2)

8 Linear (8)

3 Taper (3)

















































































9 Classic (9)

J-Pull (J)
(Steel Fronts)







J-Pull (K)
(Wood Fronts)


Integral (G)
(Steel Fronts)

X Series Attached Pedestals

Actual Height	Actual Depth	Actual Width	Description	Pull	Number ① ②	Painted Trim A	Trim B	Wood Group A Trim A	Trim B	Wood Group B Trim A	Trim B
27 1/2" (699mm)	17" (432mm)	15" (381mm)	Pencil/Pencil/Box/File	1, J, G	JPAQ-18-  	\$655.20	\$712.40	N/A	N/A	N/A	N/A
				1	JPAQ-18-  1	N/A	N/A	\$1027.52	\$1084.72	\$1050.40	\$1107.60
				K	JPAQ-18-  K	N/A	N/A	1277.12	1334.32	1300.00	1357.20
				2, 3	JPAQ-18-  	759.20	816.40	1131.52	1188.72	1154.40	1211.60
				7, 8, 9	JPAQ-18-  	784.16	841.36	1156.48	1213.68	1179.36	1236.56
27 1/2" (699mm)	23" (584mm)	15" (381mm)	Pencil/Pencil/Box/File	1, J, G	JPAQ-24-  	\$681.20	\$746.72	N/A	N/A	N/A	N/A
				1	JPAQ-24-  1	N/A	N/A	\$1053.52	\$1119.04	\$1076.40	\$1141.92
				K	JPAQ-24-  K	N/A	N/A	1303.12	1368.64	1326.00	1391.52
				2, 3	JPAQ-24-  	785.20	850.72	1157.52	1223.04	1180.40	1245.92
				7, 8, 9	JPAQ-24-  	810.16	875.68	1182.48	1248.00	1205.36	1270.88
27 1/2" (699mm)	29" (737mm)	15" (381mm)	Pencil/Pencil/Box/File	1, J, G	JPAQ-30-  	\$707.20	\$781.04	N/A	N/A	N/A	N/A
				1	JPAQ-30-  1	N/A	N/A	\$1079.52	\$1153.36	\$1102.40	\$1176.24
				K	JPAQ-30-  K	N/A	N/A	1329.12	1402.96	1352.00	1425.84
				2, 3	JPAQ-30-  	811.20	885.04	1183.52	1257.36	1206.40	1280.24
				7, 8, 9	JPAQ-30-  	836.16	910.00	1208.48	1282.32	1231.36	1305.20
27 1/2" (699mm)	17" (432mm)	15" (381mm)	Box/Box/File	1, J, G	JPAH-18-  	\$553.28	\$610.48	N/A	N/A	N/A	N/A
				1	JPAH-18-  1	N/A	N/A	\$ 861.12	\$ 918.32	\$ 886.08	\$ 943.28
				K	JPAH-18-  K	N/A	N/A	1048.32	1105.52	1073.28	1130.48
				2, 3	JPAH-18-  	631.28	688.48	939.12	996.32	964.08	1021.28
				7, 8, 9	JPAH-18-  	650.00	707.20	957.84	1015.04	982.80	1040.00
27 1/2" (699mm)	23" (584mm)	15" (381mm)	Box/Box/File	1, J, G	JPAH-24-   	\$579.28	\$644.80	N/A	N/A	N/A	N/A
				1	JPAH-24-  1	N/A	N/A	\$ 887.12	\$ 952.64	\$ 912.08	\$ 977.60
				K	JPAH-24-  K	N/A	N/A	1074.32	1139.84	1099.28	1164.80
				2, 3	JPAH-24-   	657.28	722.80	965.12	1030.64	990.08	1055.60
				7, 8, 9	JPAH-24-  	676.00	741.52	983.84	1049.36	1008.80	1074.32
27 1/2" (699mm)	29" (737mm)	15" (381mm)	Box/Box/File	1, J, G	JPAH-30-   	\$605.28	\$679.12	N/A	N/A	N/A	N/A
				1	JPAH-30-  1	N/A	N/A	\$ 913.12	\$ 986.96	\$ 938.08	\$1011.92
				K	JPAH-30-  K	N/A	N/A	1100.32	1174.16	1125.28	1199.12
				2, 3	JPAH-30-   	683.28	757.12	991.12	1064.96	1016.08	1089.92
				7, 8, 9	JPAH-30-  	702.00	775.84	1009.84	1083.68	1034.80	1108.64
27 1/2" (699mm)	17" (432mm)	15" (381mm)	File/File	1, J, G	JPAJ-18-  	\$516.88	\$574.08	N/A	N/A	N/A	N/A
				1	JPAJ-18-  1	N/A	N/A	\$ 804.96	\$ 862.16	\$ 829.92	\$ 887.12
				K	JPAJ-18-  K	N/A	N/A	929.76	986.96	954.72	1011.92
				2, 3	JPAJ-18-  	568.88	626.08	856.96	914.16	881.92	939.12
				7, 8, 9	JPAJ-18-  	581.36	638.56	869.44	926.64	894.40	951.60
27 1/2" (699mm)	23" (584mm)	15" (381mm)	File/File	1, J, G	JPAJ-24-   	\$542.88	\$608.40	N/A	N/A	N/A	N/A
				1	JPAJ-24-  1	N/A	N/A	\$ 830.96	\$ 896.48	\$ 855.92	\$ 921.44
				K	JPAJ-24-  K	N/A	N/A	955.76	1021.28	980.72	1046.24
				2, 3	JPAJ-24-   	594.88	660.40	882.96	948.48	907.92	973.44
				7, 8, 9	JPAJ-24-  	607.36	672.88	895.44	960.96	920.40	985.92
27 1/2" (699mm)	29" (737mm)	15" (381mm)	File/File	1, J, G	JPAJ-30-   	\$568.88	\$642.72	N/A	N/A	N/A	N/A
				1	JPAJ-30-  1	N/A	N/A	\$ 856.96	\$ 930.80	\$ 881.92	\$ 955.76
				K	JPAJ-30-  K	N/A	N/A	981.76	1055.60	1006.72	1080.56
				2, 3	JPAJ-30-   	620.88	694.72	908.96	982.80	933.92	1007.76
				7, 8, 9	JPAJ-30-  	633.36	707.20	921.44	995.28	946.40	1020.24


V Series Attached and Suspended Pedestals

	Actual Height	Actual Depth	Actual Width	Description	Number ①	Trim A	B
Box/Box/File — Attached	27 1/2" (699mm)	17" (432mm)	15" (381mm)	Box/Box/File	VPAH-18- 	\$431.44	\$488.64
		23" (584mm)			VPAH-24- 	457.58	525.18
		29" (737mm)			VPAH-30- 	499.38	577.38
	27 1/2" (699mm)	17" (432mm)	15" (381mm)	File/File	VPAJ-18- 	\$401.96	\$459.16
		23" (584mm)			VPAJ-24- 	428.10	495.70
		29" (737mm)			VPAJ-30- 	469.90	547.90



VPAH-24-5


File/File — Attached



VPAJ-24-5

Features

- Includes attachment hardware.
- See appropriate price list for specification requirements.
- Glides provide 1" (25mm) adjustment range.
- **Attached units must be attached** under a worksurface equal to or deeper than pedestal depth.
- For lock options, refer to Lock Programs Price List.
- Lock plugs are available in black or chrome.
- Same key numbers within each unit.
- All drawers have full extension steel ball-bearing slides.
- Drawer interiors and accessories are black finish color.
- File drawer can accommodate legal filing front to back with the use of legal filing kits (VPL1-12, VPL2-12), separately specified.
- Standard pull option available in non-metallic trim colors only.
- Full pull option matches case color.

 Available on RUSH.

To Order, Specify:

1) Product number, including:

① Pull Option:

 Standard Pull


 Full Pull

2) Trim color for drawer fronts and case.

3) Trim color for standard pull (non-metallic colors only).

4) Trim color for lock plug.

① Pull Style
























Full Pull (L)


Specification Tips

- Specify accessories separately.
- Specify worksurface height adjustment kit if mounting worksurface up to 2" (51mm) higher than standard mounting height; specify separately.
- Use corner brackets and/or cantilevers to attach the worksurface to the panel.
- Usable drawer is less than actual drawer depth. See Specification Guide for details.
- Not for use with 18" (457mm) deep worksurface with knife edge.


X Series Lateral Files — Attached

Two-High Lateral File — Proud Style — Attached

Actual Height	Actual Depth	Actual Width	Pull	Number ① ②	Painted Trim A	Trim B	Wood Group A Trim A	Trim B	Wood Group B Trim A	Trim B
12" Drawers										
27 1/2" (699mm)	18 3/4" (476mm)	29 7/8" (759mm)	1, J	JLPD-0230-  A 	\$ 788.32	\$ 867.36	N/A	N/A	N/A	N/A
			1	JLPD-0230-  1A	N/A	N/A	\$ 972.40	\$1030.64	\$1008.80	\$1067.04
			K	JLPD-0230-  KA	N/A	N/A	1170.00	1228.24	1206.40	1264.64
			2, 3	JLPD-0230-  A 	840.32	919.36	1024.40	1082.64	1060.80	1119.04
			7, 8, 9	JLPD-0230-  A	850.72	929.76	1034.80	1093.04	1071.20	1129.44
27 1/2" (699mm)	18 3/4" (476mm)	35 7/8" (911mm)	1, J	JLPD-0236-  A 	\$ 921.44	\$1010.88	N/A	N/A	N/A	N/A
			1	JLPD-0236-  1A	N/A	N/A	\$1141.92	\$1206.40	\$1183.52	\$1248.00
			K	JLPD-0236-  KA	N/A	N/A	1339.52	1404.00	1381.12	1445.60
			2, 3	JLPD-0236-  A 	973.44	1062.88	1193.92	1258.40	1235.52	1300.00
			7, 8, 9	JLPD-0236-  A	983.84	1073.28	1204.32	1268.80	1245.92	1310.40
27 1/2" (699mm)	18 3/4" (476mm)	41 7/8" (1064mm)	1, J	JLPD-0242-  A 	\$1054.56	\$1154.40	N/A	N/A	N/A	N/A
			1	JLPD-0242-  1A	N/A	N/A	\$1311.44	\$1382.16	\$1358.24	\$1428.96
			K	JLPD-0242-  KA	N/A	N/A	1509.04	1579.76	1555.84	1626.56
			2, 3	JLPD-0242-  A 	1106.56	1206.40	1363.44	1434.16	1410.24	1480.96
			7, 8, 9	JLPD-0242-  A	1116.96	1216.80	1373.84	1444.56	1420.64	1491.36



JLPD-S1A

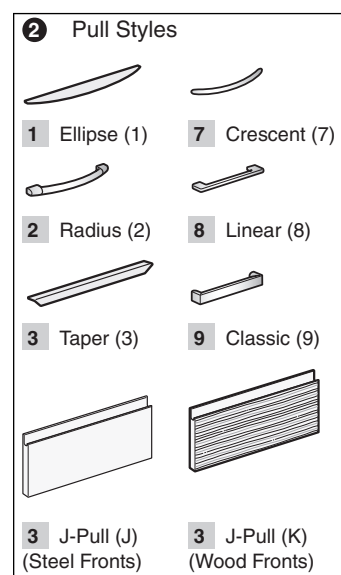

Features

- Includes 12"(305mm)-high drawers with adjustable side-to-side hanging bars for letter, legal, EDP and international A4 and foolscap suspended file folders, and attachment hardware.
- Attached files must be attached** under a worksurface 20"(508mm) or deeper; does not include counterweight.
- Standard with lock centered in front edge of top.
- For lock options, refer to Lock Programs Price List.
- Lock plugs are available in black or chrome.
- Same key numbers within each unit.
- Wood drawer front lockbar options include wood front with painted steel lockbar or wood front with wood lockbar.
- Drawer interiors and accessories are black finish color.
- Glides provide 1 1/2"(38mm) adjustment range.
- Optional drawer fronts include painted or wood.
- Crescent, Linear and Classic pulls are available on painted steel or wood drawer fronts only.
- Wood drawer front with J-Pull: J-Pull trim color matches case trim color.
- Optional drawer pulls include Ellipse, Radius, Taper, Crescent, Linear, Classic and J-Pull.
 - Ellipse pull available in non-Metallic trim colors only.
 - Radius pull available in Metallic trim colors only.
 - Taper and J-Pull trim color matches case trim color.
 - Crescent, Linear and Classic pulls are brushed nickel finish.
- Available on RUSH.

Specification Tips

- Use corner brackets and/or cantilevers to attach the worksurface to the panel.
- Specify lateral file accessories separately.
- Specify worksurface height adjustment kit if mounting panel hung worksurface up to 2"(51mm) higher than standard mounting height; specify separately.
- Not for use with 18"(457mm) deep worksurface with knife edge.

To Order, Specify:

Painted Drawer Fronts

- Product number, including:

① Drawer Front Style:

 Painted 

② Pull (see side bar)

- Trim color for drawer fronts and case.

- Trim color for pull (Ellipse and Radius only).
 - Ellipse (Non-Metallic trim colors only)
 - Radius (Metallic trim colors only; upcharge for Metallic trim on pull is included in price.)

- Trim color for lock plug.

Wood Drawer Fronts

- Product number, including:

① Drawer Lockbar Option:

 Wood/steel lockbar



 Wood/wood lockbar, add \$60.32 list

② Pull (see side bar)

- Trim color for case.
- Trim color for pull (Ellipse and Radius only).
 - Ellipse (Non-Metallic trim colors only)
 - Radius (Metallic trim colors only; upcharge for Metallic trim on pull is included in price.)
- Wood finish for drawer fronts.
- Trim color for lock plug.

X Series Lateral Files — Attached

	Actual Height	Actual Depth	Actual Width	Pull	Number ①	Painted Trim A	Trim B
Two-High Lateral File — Inset Style — Attached	27 1/2"(699mm)	18"(457mm)	29 7/8"(759mm)	J, G	JLRD-0230-S A	\$ 788.32	\$ 867.36
			35 7/8"(911mm)	J, G	JLRD-0236-S A	921.44	1010.88
			41 7/8"(1064mm)	J, G	JLRD-0242-S A	1054.56	1154.40



Features

- Includes 12"(305mm)-high drawers with adjustable side-to-side hanging bars for letter, legal, EDP and international A4 and foolscap suspended file folders, and attachment hardware.
- Attached files must be attached** under a worksurface 20"(508mm) or deeper; does not include counterweight.
- Standard with lock centered in front edge of top.
- For lock options, refer to Lock Programs Price List.
- Lock plugs are available in black or chrome.
- Same key numbers within each unit.
- Drawer interiors and accessories are black finish color.
- Integral pull (G) available with painted steel front only.
- Glides provide 1 1/2"(38mm) adjustment range.
- Optional drawer pulls include J-Pull and Integral; pull trim color matches case trim color.

Specification Tips

- Use corner brackets and/or cantilevers to attach the worksurface to the panel.
- Specify lateral file accessories separately.
- Specify worksurface height adjustment kit if mounting panel hung worksurface up to 2"(51mm) higher than standard mounting height; specify separately.
- Not for use with 18"(457mm) deep worksurface with knife edge.


To Order, Specify:

Painted Drawer Fronts


- Product number, including:
- ① Pull** (see side bar)
- Trim color for drawer fronts and case.
- Trim color for lock plug.

V Series Lateral Files — Attached

	Actual Height	Actual Depth	Actual Width	Number ①	Trim A	B
Two-High — Attached	27 1/2" (699mm)	18" (457mm)	29 7/8" (759mm)	VLRD-0230- <input type="checkbox"/> A <input checked="" type="checkbox"/>	\$689.52	\$ 768.56
			35 7/8" (911mm)	VLRD-0236- <input type="checkbox"/> A <input checked="" type="checkbox"/>	816.40	905.84
			41 7/8" (1064mm)	VLRD-0242- <input type="checkbox"/> A <input checked="" type="checkbox"/>	943.28	1043.12



VLRD-0230-5A

**Features**

- Includes attachment hardware and adjustable side-to-side hanging bars.
- 12" (305mm)-high drawers with adjustable side-to-side hanging bars for letter, legal, EDP and international A4 and foolscap suspended file folders.
- Drawer interiors and accessories are black finish color.
- Standard with lock.
- For lock options, refer to Lock Programs Price List.
- Lock plugs available in black or chrome.
- Glides provide 1 1/2" (38mm) adjustment range.
- Standard pull option available in non-metallic trim colors only.
- Full pull option matches case color.

◆ Available on RUSH.

To Order, Specify:

1) Product number, including:

① Pull Option:

☒ Standard Pull

☐ Full Pull

2) Trim color for drawer fronts and case.


3) Trim color for standard pull (non-metallic colors only).

4) Trim color for lock plug.


Specification Tip

- Use corner brackets and/or cantilevers to attach the worksurface to the panel.
- Specify worksurface height adjustment kit if mounting worksurface up to 2" (51mm) higher than standard mounting height; specify separately.
- See appropriate price book for specification requirements.
- Not for use with 18" (457mm) deep worksurface with knife edge.

X Series and V Series Accessories

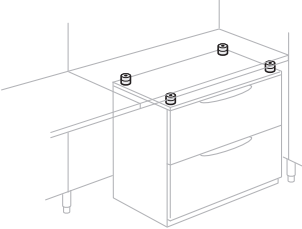	Height	Number	Price
Worksurface Height Adjustment Kit for Attached Lateral File, Storage Cabinet and Combination Unit	1-2"(25-51mm)	JSHA-1	\$26.00
	Features <ul style="list-style-type: none">• Includes eight height adjustment spacers and attachment hardware.• Provides height adjustment for file-supported worksurfaces.• Raises worksurfaces in 1"(25mm) increments up to 2"(51mm) above standard worksurface height.• Standard in charcoal finish color only. NOTE: <i>For additional steel storage options and accessories, refer to Steel Caseloads/Files/Storage Price List.</i>	To Order, Specify: 1) Product number. (No finish specification required.)	

JSHA-1

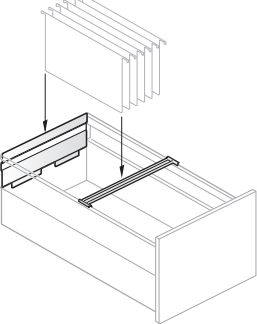
Filing Kit		JCPL-12	\$36.40
	Features <ul style="list-style-type: none">• Includes one steel drawer back extension and one side-to-side file hanging bar.• Black finish only. Specification Tips <ul style="list-style-type: none">• For use in X Series Combination Units only.• For filing side-to-side or legal in 12"(305mm) Combination Unit pedestal style drawers.	To Order, Specify: 1) Product number. (No finish specification required.)	

JCPL-12



X Series Storage Cabinets — Attached

Two-High Storage — Attached

Actual Height	Actual Depth	Actual Width	Pull	Number ① ②	Painted Trim A	Trim B	Wood Group A Trim A	Trim B	Wood Group B Trim A	Trim B
27 1/2" (699mm)	18 3/4" (476mm)	29 7/8" (759mm)	1, J	JSPY-0230- A	\$ 856.96	\$ 936.00	\$1064.96	\$1123.20	\$1096.16	\$1154.40
			2, 3	JSPY-0230- A	908.96	988.00	1116.96	1175.20	1148.16	1206.40
			7, 8, 9	JSPY-0230- A	921.44	1000.48	1129.44	1187.68	1160.64	1218.88
27 1/2" (699mm)	18 3/4" (476mm)	35 7/8" (911mm)	1, J	JSPY-0236- A	\$1005.68	\$1095.12	\$1245.92	\$1310.40	\$1288.68	\$1353.16
			2, 3	JSPY-0236- A	1057.68	1147.12	1297.92	1362.40	1340.68	1405.16
			7, 8, 9	JSPY-0236- A	1070.16	1159.60	1310.40	1374.88	1353.16	1417.64
27 1/2" (699mm)	18 3/4" (476mm)	41 7/8" (1064mm)	1, J	JSPY-0242- A	\$1055.60	\$1155.44	\$1319.76	\$1390.48	\$1366.78	\$1437.50
			2, 3	JSPY-0242- A	1107.60	1207.44	1371.76	1442.48	1418.78	1489.50
			7, 8, 9	JSPY-0242- A	1120.08	1219.92	1384.24	1454.96	1431.26	1501.98



JSPY-S1A

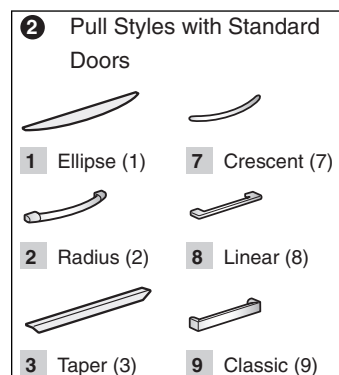

Features

- Includes hinged doors, shelf and attachment hardware.
- Hinged doors with full access hinges.
- Shelf and cabinet interiors are color matched to case.
- Shelves adjust in increments of 6" (152mm).
- Standard with lock centered in front edge of top.
- For lock options, refer to Lock Programs Price List.
- Lock plugs are available in black or chrome.
- Same key numbers within each unit.
- Wood drawer front lockbar options include wood front with painted steel lockbar or wood front with wood lockbar.
- Glides provide 1 1/2" (38mm) adjustment range.
- Optional door fronts include painted or wood.
- Touch latch door option (J) is available.
- Double doors with touch latch option include touch latch mechanism on right door and interior finger latch on left door.
- Crescent, Linear and Classic pulls are available on painted steel or wood door fronts only.
- Optional drawer pulls include Ellipse, Radius, Taper, Crescent, Linear and Classic.
 - Ellipse pull available in non-Metallic trim colors only.
 - Radius pull available in Metallic trim colors only.
 - Taper pull trim color matches case trim color.
 - Crescent, Linear and Classic pulls are brushed nickel finish.

Specification Tips

- Attached cabinets must be attached under a worksurface 20" (508mm) or deeper.
- 18 3/4" (476mm)-deep storage will not work under 18" (457mm)-deep work surfaces.
- Use corner brackets and/or cantilevers to attach the worksurface to the panel.
- Separately specify worksurface height adjustment kit if mounting worksurface up to 2" (51mm) higher than standard mounting height.

To Order, Specify:

Painted Door Fronts

- 1) Product number, including:

① Door Front Style:

S Painted

② Pull (see side bar)

\$27.04 upcharge (list) for J-Pull.

- 2) Trim color for door fronts and case.
- 3) Trim color for pull (Ellipse and Radius only).
 - Ellipse (Non-Metallic trim colors only)
 - Radius (Metallic trim colors only; upcharge for Metallic trim on pull is included in price.)
- 4) Trim color for lock plug.

Wood Door Fronts

- 1) Product number, including:

① Door Lockbar Option:

W Wood/steel lockbar

R Wood/wood lockbar, add **\$60.32** list

② Pull (see side bar)


\$27.04 upcharge (list) for J-Pull.

- 2) Trim color for case.
- 3) Trim color for pull (Ellipse and Radius only).
 - Ellipse (Non-Metallic trim colors only)
 - Radius (Metallic trim colors only; upcharge for Metallic trim on pull is included in price.)
- 4) Wood finish for door fronts.
- 5) Trim color for lock plug.


X Series Storage Cabinets — Attached/Freestanding

Two-High Combination — Attached

Actual Height	Actual Depth	Actual Width	Description	Pull	Number ① ②	Painted Trim A	Trim B	Wood Group A Trim A	Trim B	Wood Group B Trim A	Trim B
27 1/2" (699mm)	18 3/4" (476mm)	29 7/8" (759mm)	File/Box/Box/Lateral	1, J	JCPT-0230-■ ■ A	\$1379.04	\$1458.08	N/A	N/A	N/A	N/A
				1	JCPT-0230-■ 1A	N/A	N/A	\$1807.52	\$1865.76	\$1864.72	\$1922.96
				K	JCPT-0230-■ KA	N/A	N/A	1996.80	2055.04	2054.00	2112.24
				2, 3	JCPT-0230-■ ■ A	1483.04	1562.08	1911.52	1969.76	1968.72	2026.96
				7, 8, 9	JCPT-0230-■ ■ A	1508.00	1587.04	1936.48	1994.72	1993.68	2051.92
27 1/2" (699mm)	18 3/4" (476mm)	29 7/8" (759mm)	Box/Box/File/Lateral	1, J	JCPR-0230-■ ■ A	\$1379.04	\$1458.08	N/A	N/A	N/A	N/A
				1	JCPR-0230-■ 1A	N/A	N/A	\$1807.52	\$1865.76	\$1864.72	\$1922.96
				K	JCPR-0230-■ KA	N/A	N/A	1996.80	2055.04	2054.00	2112.24
				2, 3	JCPR-0230-■ ■ A	1483.04	1562.08	1911.52	1969.76	1968.72	2026.96
				7, 8, 9	JCPR-0230-■ ■ A	1508.00	1587.04	1936.48	1994.72	1993.68	2051.92



JCPT-S1A



JCPR-S1A

Features

- Includes attachment hardware and 12"(305mm)-high lateral drawer with adjustable side-to-side hanging bars for letter, legal, EDP and international A4 and foolscap suspended file folders.
- 12"(305mm) pedestal-style file drawer can accommodate legal filing side-to-side with the use of legal filing kit, separately specified.
- Standard with lock centered in front edge of top; locks all drawers.
- For lock options, refer to Lock Programs Price List.
- Lock plugs are available in black or chrome.
- Same key numbers within each unit.
- Wood drawer front lockbar options include wood front with painted steel lockbar or wood front with wood lockbar.
- Glides provide 1 1/2"(38mm) adjustment range.
- Drawer interiors and accessories are black finish color.
- All drawers have full extension steel ball-bearing slides.
- Optional drawer fronts include painted or wood.
- Wood drawer front with J-Pull: J-Pull trim color matches case trim color.
- Optional drawer pulls include Ellipse, Radius, Taper, Crescent, Linear, Classic and J-Pull.
 - Ellipse pull available in non-Metallic trim colors only.
 - Radius pull available in Metallic trim colors only.
 - Taper and J-Pull trim color matches case trim color.
 - Crescent, Linear and Classic pulls are brushed nickel finish.

Specification Tips

- Specify drawer accessories separately.
- Attached units must be attached** under a worksurface 20"(508mm) or deeper.
- 18 3/4"(476mm) deep storage will not work under 18"(457mm) deep work surfaces.
- Use corner brackets and/or cantilevers to attach the worksurface to the panel.
- Separately specify worksurface height adjustment kit if mounting worksurface up to 2"(51mm) higher than standard mounting height.

To Order, Specify:

Painted Drawer Fronts

- Product number, including:

① Drawer Front Style:

S Painted

② Pull (see side bar)

- Trim color for drawer fronts and case.
- Trim color for pull (Ellipse and Radius only).
 - Ellipse (Non-Metallic trim colors only)
 - Radius (Metallic trim colors only; upcharge for Metallic trim on pull is included in price.)
- Trim color for lock plug.

Wood Drawer Fronts

- Product number, including:

① Drawer Lockbar Option:


W Wood/steel lockbar

R Wood/wood lockbar, add \$60.32 list

② Pull (see side bar)

- Trim color for case.
- Trim color for pull (Ellipse and Radius only).
 - Ellipse (Non-Metallic trim colors only)
 - Radius (Metallic trim colors only; upcharge for Metallic trim on pull is included in price.)
- Wood finish for drawer fronts.
- Trim color for lock plug.


② Pull Styles with Standard Doors

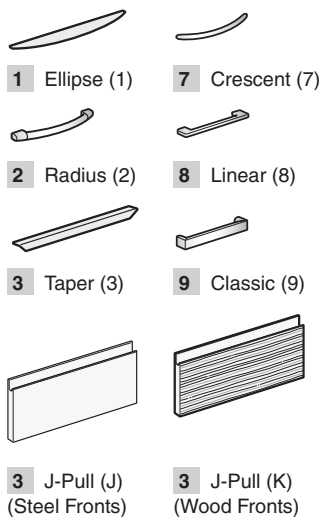


This page intentionally blank

X Series Combination Units – Attached


Two-High Combination — Attached




JCPB-SS1A (Right)



JCPE-SS1A (Left)



JCPG-SS1A (Right)



JCPJ-SS1A (Left)







Features

- Includes attachment hardware.
- 12”(305mm) pedestal-style file drawer can accommodate legal filing side-to-side with use of legal filing kit, separately specified.
- 2 – 12” pedestal style drawer can accommodate legal filing front to back with the use of kit #JCPL-12, separately specified.
- Door unit includes one adjustable shelf.
- Specify additional shelves separately.
- Shelves adjust in increments of 6”(152mm).
- Standard with lock; locks drawers and door.
- For lock options, refer to Lock Programs Price List.
- Lock plugs are available in black or chrome.
- Same key numbers within each unit.
- Wood drawer front lockbar options include wood front with painted steel lockbar or wood front with wood lockbar.
- Glides provide 1 1/2”(38mm) adjustment range.
- Drawer interiors and accessories are black finish color.
- All drawers have full extension steel ball-bearing slides.
- Shelves and storage interiors are color matched to case.
- Optional drawer/door fronts include painted or wood.
- J-Pulls are available with touch latch doors only.
- Standard door or touch latch door choice is determined by pull style code.
- Wood drawer front with J-Pull: J-Pull trim color matches case trim color.
- Optional drawer pulls include Ellipse, Radius, Taper, Crescent, Linear, Classic and J-Pull.
 - Ellipse pull available in non-Metallic trim colors only.
 - Radius pull available in Metallic trim colors only.
 - Taper and J-Pull trim color matches case trim color.
 - Crescent, Linear and Classic pulls are brushed nickel finish.







Specification Tips


- Specify drawer and storage accessories separately.
- **Attached units must be attached** under a worksurface 20”(508mm) or deeper.
- 18 3/4”(476mm) deep storage will not work under 18”(457mm) deep work surfaces.
- Use corner brackets and or cantilevers to attach the worksurface to the panel.
- Separately specify worksurface height adjustment kit if mounting worksurface up to 2”(51mm) higher than standard mounting height.


2 Pull Styles with Standard Doors

 1 Ellipse (1)	 7 Crescent (7)
 2 Radius (2)	 8 Linear (8)
 3 Taper (3)	 9 Classic (9)

2 Pull Styles with Touch Latch Door

 1 Ellipse (A)	 7 Crescent (D)
 2 Radius (B)	 8 Linear (E)
 3 Taper (C)	 9 Classic (F)


3 J-Pull (J)
(Steel Fronts)


3 J-Pull (K)
(Wood Fronts)

To Order, Specify:

Painted Drawer/Door Fronts

- 1) Product number, including:
- 1** **Drawer/Door Front Style:**
- SS** Painted
- 2** **Pull** (see below)
\$27.04 upcharge (list) for touch latch door.
- 2) Trim color for drawer/door case.
- 3) Trim color for pull (Ellipse and Radius only).
 - Ellipse (Non-Metallic trim colors only)
 - Radius (Metallic trim colors only; upcharge for Metallic trim on pull is included in price.)
- 4) Trim color for lock plug.

Wood Drawer/Door Fronts


- 1) Product number, including:
- 1** **Drawer Lockbar Option:**
- WW** Wood/steel lockbar
- RR** Wood/wood lockbar, add **\$60.32** list
- 2** **Pull** (see below)
\$27.04 upcharge (list) for touch latch door.
- 2) Trim color for case.
- 3) Trim color for pull (Ellipse and Radius only).
 - Ellipse (Non-Metallic trim colors only)
 - Radius (Metallic trim colors only; upcharge for Metallic trim on pull is included in price.)
- 4) Wood finish for drawer/door fronts.
- 5) Trim color for lock plug.

X Series Combination Units – Attached

Two-High Combination — Attached




Actual Height	Actual Depth	Actual Width	Description	Pull	Number ① ②	Painted Trim A	Trim B	Wood Group A Trim A	Wood Group A Trim B	Wood Group B Trim A	Wood Group B Trim B
27 1/2" (699mm)	18 3/4" (476mm)	29 7/8" (759mm)	Box/Box/File/Door(R)	1, J	JCPB-0230-■ ■ A	\$1609.92	\$1688.96	N/A	N/A	N/A	N/A
				1	JCPB-0230-■ 1A	N/A	N/A	\$2038.40	\$2096.64	\$2097.68	\$2155.92
				K	JCPB-0230-■ KA	N/A	N/A	2254.72	2312.96	2314.00	2372.24
				2, 3	JCPB-0230-■ ■ A	1713.92	1792.96	2142.40	2200.64	2201.68	2259.92
				7, 8, 9	JCPB-0230-■ ■ A	1738.88	1817.92	2167.36	2225.60	2226.64	2284.88
27 1/2" (699mm)	18 3/4" (476mm)	29 7/8" (759mm)	Door(L)/Box/Box/File	1, J	JCPE-0230-■ ■ A	\$1609.92	\$1688.96	N/A	N/A	N/A	N/A
				1	JCPE-0230-■ 1A	N/A	N/A	\$2038.40	\$2096.64	\$2097.68	\$2155.92
				K	JCPE-0230-■ KA	N/A	N/A	2254.72	2312.96	2314.00	2372.24
				2, 3	JCPE-0230-■ ■ A	1713.92	1792.96	2142.40	2200.64	2201.68	2259.92
				7, 8, 9	JCPE-0230-■ ■ A	1738.88	1817.92	2167.36	2225.60	2226.64	2284.88
27 1/2" (699mm)	18 3/4" (476mm)	29 7/8" (759mm)	File/File/Door(R)	1, J	JCPG-0230-■ ■ A	\$1569.36	\$1648.40	N/A	N/A	N/A	N/A
				1	JCPG-0230-■ 1A	N/A	N/A	\$1979.12	\$2037.36	\$2037.36	\$2095.60
				K	JCPG-0230-■ KA	N/A	N/A	2195.44	2253.68	2253.68	2311.92
				2, 3	JCPG-0230-■ ■ A	1647.36	1726.40	2057.12	2115.36	2115.36	2173.60
				7, 8, 9	JCPG-0230-■ ■ A	1666.08	1745.12	2075.84	2134.08	2134.08	2192.32
27 1/2" (699mm)	18 3/4" (476mm)	29 7/8" (759mm)	Door(L)/File/File	1, J	JCPJ-0230-■ ■ A	\$1569.36	\$1648.40	N/A	N/A	N/A	N/A
				1	JCPJ-0230-■ 1A	N/A	N/A	\$1979.12	\$2037.36	\$2037.36	\$2095.60
				K	JCPJ-0230-■ KA	N/A	N/A	2195.44	2253.68	2253.68	2311.92
				2, 3	JCPJ-0230-■ ■ A	1647.36	1726.40	2057.12	2115.36	2115.36	2173.60
				7, 8, 9	JCPJ-0230-■ ■ A	1666.08	1745.12	2075.84	2134.08	2134.08	2192.32

Finish/Color Legend

Wood Group	Veneer Type	Variety	Cutting Technique	Surface	Matching Technique	Grain Direction		Finish Name/Color	Specification Number
						Panel Face	Component Face		
A* 	Double Cut	Obeche	Double Cut	Open Pore	N/A	Horizontal	Horizontal	Applegate	2P-RL
								Beachwood	WL-RL
								Butternut	2R-RL
								Ebony	WJ-RE
								Echo	2N-RL
						Horizontal	Horizontal	Melba	WE-RT
								Sorrel	WF-RC
								Wenge	WC-RW

*Wood Group 1 Grain Direction

- All grain runs vertically on Doors and Trim Covers.
- All grain runs the width of Top Caps.
- All grains (except Mahogany Satin) run horizontally on Pads.

Wood Group	Veneer Type	Variety	Cutting Technique	Surface	Matching Technique	Grain Direction		Finish Name/Color	Specification Number
						Panel Face	Component Face		
B** 	Natural	Maple	Plain Sliced	Open Pore	Book Matched	Vertical	Vertical	Light Maple	VP-LM
								Natural Maple	VP-N
								Sand on Maple	VP-AD
	Natural	Cherry	Plain Sliced	Filled	Book Matched	Vertical	Vertical	Amber on Cherry	VC-CA1
								Caramel Cherry	VC-W33
								Heritage Cherry	VC-W30
								Pacific Cherry	VC-W32
	Natural	Oak	Plain Sliced	Open Pore	Book Matched	Vertical	Vertical	Natural Oak	VJ-W05
								Naturally Walnut	VR-W12
	Natural	Walnut	Plain Sliced	Open Pore	Book Matched	Vertical	Vertical	Espresso on Walnut	VR-W15
								Mahogany Satin on Walnut	VR-W21
								Retro on Walnut	VR-W31
B 	Quarter Cut	Anegre	Quarter Cut	Open Pore	N/A	Vertical	Vertical	Espresso on QC Anegre	NP-W15
								Golden on QC Anegre	NP-W08
								Light on QC Anegre	NP-W07
	Quarter Cut	Cherry	Quarter Cut	Open Pore	N/A	Vertical	Vertical	Medium on QC Cherry	NX-U
	Quarter Cut	Maple	Quarter Cut	Open Pore	N/A	Vertical	Vertical	Natural QC Maple	NM-N
	Quarter Cut	Walnut	Quarter Cut	Open Pore	N/A	Vertical	Vertical	Espresso on QC Walnut	NW-W15
								Retro on QC Walnut	NW-W31
B 	Rift Cut	White Oak	Rift Cut	Open Pore	N/A	Vertical	Vertical	Espresso on Rift Cut White Oak	NR-W15

**Wood Group B Grain Direction


- All grain runs vertically on Doors, Trim Covers and Pads.
- All grain runs the width of Top Caps.

Because of the natural properties of wood, variations of grain pattern and finish color can be expected. Haworth carefully selects each material used in the manufacturing of products to ensure consistent and acceptable color and finish. Wood also will change color due to lighting conditions. Haworth controls this by using surface finishes to reduce color change. However, color change may be more evident in light-colored finishes.


Finish/Color Legend

Wood Grain on Stackable Panels

The following examples illustrate the visual differences between unmatched wood pads and the optional matching wood pad set. The pads in the matching wood pad set are manufactured from the same sheet of veneer, giving a consistent appearance in finish color and matching wood grain.



Unmatched
Wood Pads







































Matching Wood
Pad Set

Forest Stewardship Council (FSC) Statement:
In our continuing support of sustainable forestry and responsible purchasing, Haworth North America is offering FSC certified wood products at no up-charge. By providing FSC certified material, Haworth is supporting our client's green building goals and demonstrating our collective commitment to source materials more sustainably.
Haworth will provide to you the necessary FSC-certified paperwork with your shipment. For more information, FAQs, and a complete FSC product list (including product exceptions), go to the Library and search FSC.

Alert:
These materials are current, however they are being considered for future obsolescence due to low volume.
Cordovan on Walnut VR-W13

Finish/Color Legend

	PREMISE Panels, Components	Wing Walls	Panel Attached Screens	Worksurfaces, Support Panels	T-Mold
Solid Colors — Grade A					
Beige	TR-R 	TR-R 	TR-R	H-34 	HP-34 
Chalk	TR-AK 	TR-AK 	TR-AK	H-AK 	HP-AK 
Charcoal	TR-K 	TR-K 	TR-K	H-8J 	HP-8J 
Graphite	TR-J 	TR-J 	TR-J	H-3J 	HP-3J 
Gray Tone	TR-G 	TR-G 		H-62 	HP-62 
Linen				H-WL 	HP-WL 
Platinum				H-3P 	HP-3P 
Putty	TR-AA 	TR-AA 	TR-AA	H-AA 	HP-AA 
Shadow (Charcoal)					
Smoke	TR-E 	TR-E 	TR-E	H-3E 	HP-3E 
Metallic Colors — Grade B					
Metallic Champagne	TR-MC 		TR-MC		
Metallic Silver	TR-LE 		TR-LE		
Laminate Wood Grain Colors — Grade A					
Amber Cherry				H-AM	
Maple				H-AE 	
Laminate - Premium Wood Grain — Grade B					
Brazilwood		H-KA		H-KA	
Colombian Walnut		H-KG		H-KG	
New Age Oak		H-KC		H-KC	
River Cherry		H-KD		H-KD	
Sanara		H-KE		H-KE	
Williamsburg Cherry		H-KF		H-KF	
Translucent - Jump Stuff					
Ice (Blue) — Grade A					
Frost (White) — Grade A					
Moon (Amber) — Grade B					
Shadow (Charcoal) — Grade B					
Fabric Screen					
New White	FO-NW				
Glass/Glazing					
Clear — Grade A	SK-1C 				
English Reeded — Grade C	SQ-ER				
Checks Mix — Grade D	SQ-CM				
Frosted — Grade D	SG-1F				
Vertical Moire — Grade D	SQ-VM				
Lock Plugs					
Black					
Chrome					

 Available on RUSH.

*Edgeband and Knife edge only.

Alert:

These materials are current, however they are being considered for future obsolescence due to low volume.

Medium Cherry	H-AD
Barley Grain	H-DH
Oats Grain	H-DA
Wheat Grain	H-DE
Owl Nest	H-EK
Quail Nest	H-EC
Rhea Nest	H-ED
Robin Nest	H-EA
Grey Spex	H-22
White Spex	H-21
Metallic Gunmetal	TR-MG

Finish/Color Legend

	Edgeband	Cascade	Adaptable Component Overhead Storage	X Series	V Series	Jump Stuff	Belong
Solid Colors — Grade A							
Beige	HP-34	HP-34	TR-R	TR-R	TR-R		TR-R
Chalk	HP-AK	HP-AK	TR-AK	TR-AK	TR-AK		TR-AK
Charcoal	HP-8J	HP-8J	TR-K	TR-K	TR-K		TR-K
Graphite	HP-3J	HP-3J	TR-J	TR-J	TR-J		TR-J
Gray Tone	HP-62	HP-62	TR-G	TR-G	TR-G		TR-G
Linen	HP-WL	HP-WL					
Platinum	HP-3P	HP-3P					
Putty	HP-AA	HP-AA	TR-AA	TR-AA	TR-AA		TR-AA
Shadow (Charcoal)		HP-LU ²					
Smoke	HP-3E	HP-3E	TR-E	TR-E	TR-E		TR-E
Metallic Colors — Grade B							
Metallic Champagne			TR-MC	TR-MC	TR-MC	TR-MC	
Metallic Silver			TR-LE	TR-LE	TR-LE	TR-LE	
Laminate Wood Grain Colors — Grade A							
Amber Cherry	HP-AM						
Maple	HP-AE						
Laminate - Premium Wood Grain* — Grade B							
Brazilwood	HP-KA*						
Colombian Walnut	HP-KG*						
New Age Oak	HP-KC*						
River Cherry	HP-KD*						
Sanara	HP-KE*						
Williamsburg Cherry	HP-KF*						
Translucent - Jump Stuff							
Ice (Blue) — Grade A						TR-LX	
Frost (White) — Grade A						TR-LQ	
Moon (Amber) — Grade B						TR-LY	
Shadow (Charcoal) — Grade B						TR-LU	
Translucent Basic							
White — Grade C			P8-AW	P8-AW			
Translucent Patterned							
Blue — Grade D			P8-PB	P8-PB			
Oyster — Grade D			P8-PY	P8-PY			
Glass/Glazing							
Clear — Grade A							
English Reeded — Grade C							
Checks Mix — Grade D							
Frosted — Grade D							
Vertical Moire — Grade D							
Lock Plugs							
Black			LR-BL	LR-BL	LR-BL		
Chrome			LR-BP	LR-BP	LR-BP		

◆ Available on RUSH.

*Edgeband and Knife edge only. T-Mold and Cascade edge not available with woodgrain edge trim.

Alert:

These materials are current, however they are being considered for future obsolescence due to low volume.

Medium Cherry	H-AD
Patterned Silver	P8-PS
Patterned White	P8-PW
Barley Grain	H-DH
Oats Grain	H-DA
Wheat Grain	H-DE
Owl Nest	H-EK
Quail Nest	H-EC
Rhea Nest	H-ED
Robin Nest	H-EA
Grey Spex	H-22
White Spex	H-21
Metallic Gunmetal	TR-MG

Systems Fabrics/Color Legend

- Fabrics listed on this page apply to all PREMISE upholstered products. Exceptions will be noted on the price chart pages.

⁽¹⁾**Fabric/colorway not available on basic monolithic fabric surface panels (includes PREMISE fabric add-on panels).**

⁽²⁾**Puzzler not available on screens.**

⁽³⁾**Tellure is available only on tackboards or tack strips.**

⁽⁴⁾**Brisa Faux Leather are only available on Belong Blotter.**

◆ Fabric/colorway available on RUSH.

- To obtain fabric samples contact your authorized Haworth dealer.
- Fabric and finish availability as well as technical information are subject to change; Refer to Haworth.com/surfaces for current information.
- All fabrics except Tellure are 66" wide. Tellure is 54" wide.

ⓓ = Directional fabric

Ⓝ = Non-directional fabric

Fabric Grade: A ⓓ HIGHLANDS 100% Recycled Polyester 100% REPVE®

L6-AG Glen ◆
L6-AH Heather
L6-AL Loch
L6-AM Moor ◆
L6-AP Peat ◆
L6-AT Thatch

Fabric Grade: A ⓓ IOWA 52% Post Industrial Recycled Polyester/ 48% Post Consumer Recycled Polyester

FZ-10 Badger ◆
FZ-6 Bixby
FZ-3 Bobwhite ◆
FZ-2 Cedar Rock ◆
FZ-11 Clear Lake
FZ-13 Emerson
FZ-7 Gar
FZ-9 Honeycreek
FZ-1 Manawa ◆
FZ-5 Rice Lake ◆
FZ-4 Trappers Bay ◆
FZ-12 Walnut Woods
FZ-8 Wapello ◆

Fabric Grade: A ⓓ POINT 100% Polyester EE-0AG Compass EE-0AC Decimal EE-0AF Focal EE-0AD Nib EE-0AA Peak EE-0AE Vertex

Fabric Grade: A ⓓ SAVOY 51% Virgin Polyester/ 49% Recycled Polyester

FJ-CC Apache
FJ-AD Balsam ◆
FJ-AP Bisque ◆
FJ-AE Blue Ridge ◆
FJ-AA Blue Willow ◆
FJ-CA Breaker
FJ-AR Chamois ◆
FJ-AK Elephant ◆
FJ-AL Glacier ◆
FJ-AX Mango
FJ-AY Maya
FJ-AW Poplar
FJ-CD Raisen
FJ-AT Shallot ◆
FJ-AM Stainless ◆
FJ-AF Tempest

Fabric Grade: A ⓓ STRIAE 42% Post Industrial Recycled Polyester/ 42% Post Consumer Recycled Polyester/ 16% Polyester (84% REPVE®)

C1-AJ Beam ◆
C1-AM Band ◆
C1-AH Element ◆
C1-AF Fillet ◆
C1-AC Moonlight ◆
C1-AE Ray ◆
C1-AK Ribbons ◆
C1-AD Straws ◆
C1-AA Stream ◆
C1-AL Trace ◆

Fabric Grade: A ⓓ TAILORED 100% Post Consumer Recycled Polyester

PY-AL Alter
PY-BU Buttons
PY-DR Draper
PY-FC French Chalk
PY-HE Hem
PY-MA Mannequin
PY-SE Seam
PY-SH Shears
PY-SU Suit
PY-TH Thread
PY-TR Tradition

Fabric Grade: A ⓓ TATAMI⁽¹⁾ 100% Polyester

W5-1 Agave ◆
W5-2 Coir
W5-3 Geta
W5-4 Hemp ◆
W5-5 Jute ◆
W5-6 Kayar ◆
W5-7 Kobe
W5-8 Saffron ◆
W5-9 Sapporo
W5-10 Sisal
W5-12 Tabi
W5-11 Tesori ◆

Fabric Grade: A ⓓ TUSCAN 65% Post Industrial Recycled Polyester/ 35% Post Consumer Recycled Polyester (35% REPVE®)

TK-AR Arno
TK-CA Carrara
TK-DA David
TK-ET Etruscan
TK-FL Florence
TK-LM Limoncello
TK-MA Masonry
TK-ME Medici
TK-TR Olive Tree
TK-PS Pisa
TK-RM Romanesque
TK-RU Rustic
TK-SE Siena

Fabric Grade: B ⓓ CLASSIC 82% Recycled Polyester/ 18% Polyester (82% REPVE®)

L5-AJ Art ◆
L5-AG Car
L5-AF Comedy ◆
L5-AR Dance ◆
L5-AH Design ◆
L5-AD Drama ◆
L5-AT Movie ◆
L5-AA Musical ◆
L5-AC Radio ◆
L5-AS Song

Fabric Grade: B ⓓ HUE 62% Antimony Free Polyester/ 38% Virgin Polyester

6-BK Bark
6-ED Eddy
6-FR Froth
6-GK Ginko
6-LT Latte
6-LF Leaf
6-LM Lemon
6-MG Marigold
6-MR Marine
6-PP Poppy
6-RD Red
6-SS Seaside
6-SP Spring
6-ST Steam
6-TQ Turquoise
6-WP Wisp

Fabric Grade: B ⓓ KIO 100% Recycled Polyester

ZR-6 Bennett ◆
ZR-8 Cascade
ZR-7 Crew ◆
ZR-5 FUD
ZR-3 Jeanlin
ZR-1 Jib
ZR-11 Reeds Lake
ZR-13 Regatta ◆
ZR-10 Sailor
ZR-2 Sentra ◆
ZR-12 Smurf
ZR-9 TSJ ◆
ZR-4 Yippi Kio ◆

Fabric Grade: B Ⓝ PUZZLER⁽²⁾

48% Post Industrial
Recycled Polyester/
52% Post Consumer
Recycled Polyester

7L-C Clue
7L-CR Cryptic
7L-E Enigma
7L-I Intrigue
7L-M Maze
7L-R Riddle

Fabric Grade: B ⓓ RITZ 49% Post Industrial Recycled Polyester/ 51% Post Consumer Recycled Polyester (51% REPVE®)

PV-BR Bravo
PV-BT Black Tie
PV-CA Candle Light
PV-CH Champagne
PV-CL Classy
PV-CT Class Act
PV-FR Formal
PV-VA Ovation
PV-WT White Tie

Fabric Grade: B ⓓ SHIMMER 100% Recycled Polyester

WS-5 Cellophane
WS-8 Copper
WS-13 Dew
WS-14 Diamond
WS-9 Flaxen
WS-4 Gems
WS-11 Glass
WS-1 Glitter
WS-10 Mirage
WS-16 Mirror
WS-2 Moonlight
WS-6 Puddle
WS-15 Reflection
WS-12 Stars
WS-3 Water
WS-7 Wet Grass

Systems/Seating Fabrics/Color Legend

Fabric Grade: B (d)

TRAFFIC

24% Post Industrial
Recycled Polyester/
76% Post Consumer
Recycled Polyester

WZ-9	Autobon
WZ-6	Country Drive
WZ-7	Freeway
WZ-5	Gridlock
WZ-1	Jam
WZ-3	Merge
WZ-8	Route 66
WZ-4	Ticket
WZ-2	Yield

Fabric Grade C (d)

BIRDS NEST

38% Post Industrial
Recycled Polyester/
20% Post Consumer
Recycled Polyester/
42% Recycled Polyester
(20% REPVE®)

PH-CA	Canary
PH-EA	Eagle
PH-EG	Egret
PH-FA	Falcon
PH-HE	Heron
PH-HU	Hummingbird
PH-MD	Morning Dove
PH-NU	Nuthatch
PH-WL	Owl
PH-RA	Raven
PH-SA	Sandpiper
PH-ST	Stork
PH-SW	Swan

Fabric Grade C (d)

GEODE

34% Post Industrial
Recycled Polyester/
26% Post Consumer
Recycled Polyester/
40% Recycled Polyester
(26% REPVE®)

PR-BS	Bismuth
PR-CA	Calcite
PR-CT	Citrine
PR-CR	Crystal
PR-FL	Fluorite
PR-GA	Galena
PR-HL	Hollow
PR-MA	Malachite
PR-QU	Quartz
PR-WN	Wonder

Fabric Grade: D (d)

TANGRAM

57% Polyester/
28% Post Industrial
Recycled Polyester/
15% Post Consumer
Recycled Polyester

LV-CL	Clue
LV-EN	Enigma
LV-GU	Guess
LV-MA	Maze
LV-MU	Muse
LV-MT	Mystery
LV-MY	Mystify
LV-UT	Outline
LV-PE	Perplex
LV-PC	Pieces
LV-PU	Puzzle
LV-RD	Riddle
LV-SC	Scrabble
LV-SL	Solve
LV-TE	Teaser
LV-TR	Trick

Seating

Fabric Grade: A (n)

TELLURE^(s)

100% Polyester

3A-31	Aegean
3A-18	Black
3A-20	Burgundy
3A-40	Chocolate
3A-28	Dynamo
3A-22	Galaxy
3A-42	Geranium
3A-36	Grass
3A-35	Ivory
3A-23	Jodhpurs
3A-33	Miami
3A-19	Navy
3A-06	Nickel
3A-34	Ocean
3A-32	Sky
3A-38	Slate
3A-37	Spring
3A-39	Steel
3A-41	Sunflower
3A-43	Tomato

Systems

ALERT: These materials are current, however they are being considered for future obsolescence due to low volume.

Fabric Grade: B (d)

BISCOTTI

100% Recycled Polyester

FN-AJ	Atlantis
FN-AE	Copper
FN-AW	Curry
FN-AT	Fig
FN-AL	Fresco
FN-AX	Icing
FN-AR	Macaroon
FN-AF	Maize
FN-AG	Opal Gray
FN-AD	Pesto
FN-AC	Phoenician
FN-AH	Sea Spray
FN-AA	Shark
FN-AN	Silver Ash
FN-AP	Torte
FN-AM	Wafer

Fabric Grade: B (d)

LANDSCAPE

100% Recycled Polyester

C2-AD	Estate
C2-AH	Harvest
C2-AJ	Panorama
C2-AF	Parkland
C2-AC	Photograph
C2-AE	Seascape
C2-AA	Vista

Fabric Grade: B (d)

TRAX

24% Post Industrial
Recycled Polyester/
76% Post Consumer
Recycled Polyester

W9-8	Back
W9-5	Cover Your
W9-2	Eight
W9-4	Field
W9-6	Railroad
W9-1	Sand
W9-7	Tire
W9-3	Trolley

Fabric Grade: C (d)

MAYPOLE by Maharam

100% Polyester

2D-004	Reed
2D-003	Rush
2D-006	Sway
2D-001	Tone
2D-005	Twirl
2D-002	Waver

Haworth+

For information on the Haworth+ alliance program, including images and product availability, please refer to: Haworth.com/surfaces > Haworth+ Library

Customer's Own Material (COM)

For general Customer's Own Material (COM) information including processes and forms, please refer to: Haworth.com/surfaces > COM

For information on approved COM's, please refer to: Haworth.com/surfaces > COM Library

COM Yardage Requirements

Procedure To confirm approval of or request new approval for COM's, contact the **Haworth Inquiry Center (1.800.426.8562)**, or **<http://hub.Haworth.com>**, or **www.haworth.com** > **surface collection** > **COM Library** to determine if the COM you have selected has already been tested and approved for use on our product.

If the fabric is approved, and the directional orientation (directional rightway, directional railroad, or non-directional) of the tested fabric has been confirmed, then refer to the appropriate column in the chart for yardage requirements.

- Steps to follow to calculate fabric usage:**
- 1) Identify product type and size.
 - 2) Determine method in which fabric is to be cut (directional rightway, directional railroad or non-directional).
 - 3) Determine fabric roll width.
 - 4) Find corresponding fabric usage value from the table.
 - 5) Calculate fabric required using the formula below:
Fabric usage = number of units x number of sides with fabric x fabric usage (from tables) + C (constant).

Constant — Compose®, PREMISE®, PLACES® and UniGroup®

Product	C
Panels	2.5
Desktop Screens	1.5
Tackboards, Tackstrips	1.5
OSUs and Flipper Doors	1.5
LFBs and VSUs	1.5
Trim Covers (Finish Post, End of Run)	1.5
Stackable Pads	1.5
Add-ons and Wainscot Panels	1.5


Constant — RACE®

Product	C
Desktop Screens	1.5
RACE Privacy Screens*	0.0
RACE Pads	0.0


*Includes fabric for both sides. Sizes 51"-78" include two screens.

- 6) Repeat steps 1-5 for each product type, size and fabric.
- 7) Add all values together to find total number of linear yards required for the order. Add the appropriate percentage shown below to the total yardage to accommodate fabric flaws, wrinkles and other imperfections.
 - Up to 500 yards Add 10%
 - 501 to 1000 yards Add 5%
 - More than 1000 yards Add 3%


Directional Rightway:

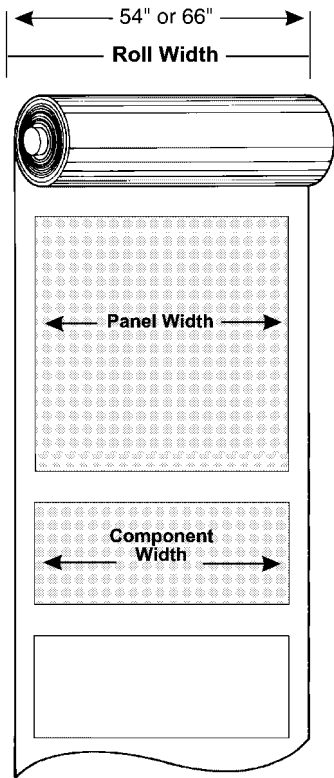

Directional Railroad:

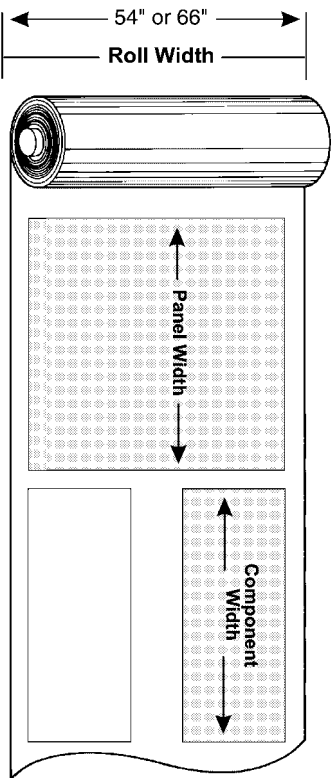

Non-Directional:

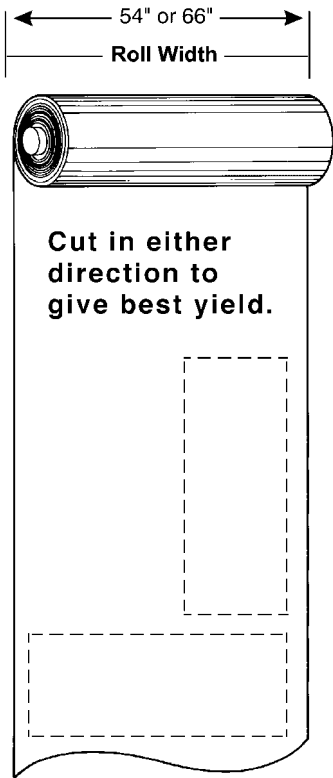

COM Yardage Requirements

PREMISE Panel Fabric Usage

Nominal (Inches)		54 Inch Roll (Linear Yards)			66 Inch Roll (Linear Yards)		
Height	Width	Directional	Railroad	Non-directional	Directional	Railroad	Non-directional
32"(813mm)	18"(457mm)	0.46	0.67	0.46	0.46	0.33	0.33
	24"(610mm)	0.92	0.83	0.83	0.46	0.42	0.42
	30"(762mm)	0.92	1.00	0.92	0.92	0.50	0.50
	36"(914mm)	0.92	1.17	0.92	0.92	0.58	0.58
	42"(1067mm)	0.92	1.33	0.92	0.92	0.67	0.67
	48"(1219mm)	0.92	1.50	0.92	0.92	0.75	0.75
	60"(1524mm)	N/A	1.83	1.83	0.92	0.92	0.92
42"(1067mm)	18"(457mm)	0.60	0.67	0.60	0.60	0.67	0.60
	24"(610mm)	1.19	0.83	0.83	0.60	0.83	0.60
	30"(762mm)	1.19	1.00	1.00	1.19	1.00	1.00
	36"(914mm)	1.19	1.17	1.17	1.19	1.17	1.17
	42"(1067mm)	1.19	1.33	1.19	1.19	1.33	1.19
	48"(1219mm)	1.19	1.50	1.19	1.19	1.50	1.19
	60"(1524mm)	N/A	1.83	1.83	1.19	1.83	1.19
48"(1219mm)	18"(457mm)	0.68	0.67	0.67	0.68	0.67	0.67
	24"(610mm)	1.36	0.83	0.83	0.68	0.83	0.68
	30"(762mm)	1.36	1.00	1.00	1.36	1.00	1.00
	36"(914mm)	1.36	1.17	1.17	1.36	1.17	1.17
	42"(1067mm)	1.36	1.33	1.33	1.36	1.33	1.33
	48"(1219mm)	1.36	1.50	1.36	1.36	1.50	1.36
	60"(1524mm)	N/A	1.83	1.83	1.36	1.83	1.36
53"(1346mm)	18"(457mm)	0.75	0.67	0.67	0.75	0.67	0.67
	24"(610mm)	1.50	0.83	0.83	0.75	0.83	0.75
	30"(762mm)	1.50	1.00	1.00	1.50	1.00	1.00
	36"(914mm)	1.50	1.17	1.17	1.50	1.17	1.17
	42"(1067mm)	1.50	1.33	1.33	1.50	1.33	1.33
	48"(1219mm)	1.50	1.50	1.50	1.50	1.50	1.50
	60"(1524mm)	N/A	1.83	1.83	1.50	1.83	1.50
64"(1626mm)	18"(457mm)	0.90	N/A	0.90	0.90	0.67	0.67
	24"(610mm)	1.81	N/A	1.81	0.90	0.83	0.83
	30"(762mm)	1.81	N/A	1.81	1.81	1.00	1.00
	36"(914mm)	1.81	N/A	1.81	1.81	1.17	1.17
	42"(1067mm)	1.81	N/A	1.81	1.81	1.33	1.33
	48"(1219mm)	1.81	N/A	1.81	1.81	1.50	1.50
	60"(1524mm)	N/A	N/A	N/A	1.81	1.83	1.81
80"(2032mm)	18"(457mm)	1.13	N/A	1.13	1.13	N/A	1.13
	24"(610mm)	2.25	N/A	2.25	1.13	N/A	1.13
	30"(762mm)	2.25	N/A	2.25	2.25	N/A	2.25
	36"(914mm)	2.25	N/A	2.25	2.25	N/A	2.25
	42"(1067mm)	2.25	N/A	2.25	2.25	N/A	2.25
	48"(1219mm)	2.25	N/A	2.25	2.25	N/A	2.25
	60"(1524mm)	N/A	N/A	N/A	2.25	N/A	2.25

COM Yardage Requirements

PREMISE Stackable Pad Fabric Usage

Nominal (Inches)		54 Inch Roll (Linear Yards)			66 Inch Roll (Linear Yards)		
Height	Width	Directional	Railroad	Non-directional	Directional	Railroad	Non-directional
10"(254mm)	18"(457mm)	0.19	0.20	0.19	0.13	0.15	0.13
	24"(610mm)	0.19	0.26	0.19	0.19	0.19	0.19
	30"(762mm)	0.39	0.31	0.31	0.19	0.24	0.19
	36"(914mm)	0.39	0.37	0.37	0.39	0.28	0.28
	42"(1067mm)	0.39	0.43	0.39	0.39	0.32	0.32
	48"(1219mm)	0.39	0.48	0.39	0.39	0.36	0.36
	60"(1524mm)	N/A	0.59	0.59	0.39	0.44	0.39
16"(406mm)	18"(457mm)	0.28	0.31	0.28	0.19	0.20	0.19
	24"(610mm)	0.28	0.39	0.28	0.28	0.26	0.26
	30"(762mm)	0.56	0.47	0.47	0.28	0.31	0.28
	36"(914mm)	0.56	0.56	0.56	0.56	0.37	0.37
	42"(1067mm)	0.56	0.64	0.56	0.56	0.43	0.43
	48"(1219mm)	0.56	0.72	0.56	0.56	0.48	0.48
	60"(1524mm)	N/A	0.89	0.89	0.56	0.59	0.56
24"(610mm)	18"(457mm)	0.39	0.61	0.39	0.26	0.31	0.26
	24"(610mm)	0.39	0.78	0.39	0.39	0.39	0.39
	30"(762mm)	0.78	0.94	0.78	0.39	0.47	0.39
	36"(914mm)	0.78	1.11	0.78	0.78	0.56	0.56
	42"(1067mm)	0.78	1.28	0.78	0.78	0.64	0.64
	48"(1219mm)	0.78	1.44	0.78	0.78	0.72	0.72
	60"(1524mm)	N/A	1.78	1.78	0.78	0.89	0.78
32"(813mm)	18"(457mm)	0.44	0.61	0.44	0.30	0.31	0.30
	24"(610mm)	0.44	0.78	0.44	0.44	0.39	0.39
	30"(762mm)	0.89	0.94	0.89	0.44	0.47	0.44
	36"(914mm)	0.89	1.11	0.89	0.89	0.56	0.56
	42"(1067mm)	0.89	1.28	0.89	0.89	0.64	0.64
	48"(1219mm)	0.89	1.44	0.89	0.89	0.72	0.72
	60"(1524mm)	N/A	1.78	1.78	0.89	0.89	0.89

PREMISE Expanded Variable Height Cover Fabric Usage

Nominal (Inches)		54 Inch Roll (Linear Yards)			66 Inch Roll (Linear Yards)		
Height		Directional	Railroad	Non-directional	Directional	Railroad	Non-directional
5"(127mm)		0.05	0.31	0.05	0.04	0.31	0.04
6"(152mm)		0.06	0.31	0.06	0.04	0.31	0.04
10"(254mm)		0.08	0.31	0.08	0.07	0.31	0.07
11"(279mm)		0.09	0.31	0.09	0.07	0.31	0.07
16"(406mm)		0.31	0.31	0.13	0.10	0.31	0.10
21"(533mm)		0.16	0.31	0.16	0.13	0.31	0.13
22"(559mm)		0.17	0.31	0.17	0.13	0.31	0.13
27"(686mm)		0.20	0.31	0.20	0.16	0.31	0.16
32"(813mm)		0.24	0.31	0.24	0.19	0.31	0.19
38"(965mm)		0.28	0.31	0.28	0.22	0.31	0.22
48"(1219mm)		0.35	0.31	0.35	0.28	0.31	0.28

COM Yardage Requirements

PREMISE Trim Covers Fabric Usage (End of Run, 2-Way, 3-Way, Variable Height)

Nominal (Inches)	54 Inch Roll (Linear Yards)			66 Inch Roll (Linear Yards)		
Height	Directional	Railroad	Non-directional	Directional	Railroad	Non-directional
5"(127mm)	0.04	0.26	0.04	0.03	0.26	0.03
6"(152mm)	0.04	0.26	0.04	0.04	0.26	0.04
10"(254mm)	0.07	0.26	0.07	0.06	0.26	0.06
11"(279mm)	0.07	0.26	0.07	0.06	0.26	0.06
16"(406mm)	0.10	0.26	0.10	0.08	0.26	0.08
21"(533mm)	0.13	0.26	0.13	0.11	0.26	0.11
22"(559mm)	0.13	0.26	0.13	0.11	0.26	0.11
24"(610mm)	0.14	0.26	0.14	0.12	0.26	0.12
26"(660mm)	0.16	0.26	0.16	0.13	0.26	0.13
27"(686mm)	0.16	0.26	0.16	0.13	0.26	0.13
32"(813mm)	0.19	0.26	0.19	0.16	0.26	0.16
38"(965mm)	0.22	0.26	0.22	0.19	0.26	0.19
42"(1067mm)	0.24	0.26	0.24	0.20	0.26	0.20
48"(1219mm)	0.28	0.26	0.28	0.23	0.26	0.23
53"(1346mm)	0.31	N/A	0.31	0.25	0.26	0.25
58"(1473mm)	0.33	N/A	0.33	0.28	0.26	0.28
64"(1625.6mm)	0.37	N/A	0.37	0.31	0.26	0.31
74"(1880mm)	0.42	N/A	0.42	0.35	N/A	0.35
80"(2032mm)	0.46	N/A	0.46	0.38	N/A	0.38

PREMISE Tackboard and Tackstrip Fabric Usage

Nominal (Inches)		54 Inch Roll (Linear Yards)			66 Inch Roll (Linear Yards)		
Height	Width	Directional	Railroad	Non-directional	Directional	Railroad	Non-directional
5"(254mm)	24"(610mm)	0.306	0.208	0.208	0.306	0.139	0.139
	30"(762mm)	0.306	0.250	0.250	0.306	0.167	0.167
	36"(914mm)	0.306	0.292	0.292	0.306	0.194	0.194
	42"(1067mm)	0.306	0.333	0.306	0.306	0.222	0.222
	48"(1219mm)	0.306	0.375	0.306	0.306	0.250	0.250
	60"(1524mm)	N/A	0.458	0.458	0.306	0.306	0.306
16"(406mm)	24"(610mm)	0.611	0.417	0.417	0.611	0.278	0.278
	30"(762mm)	0.611	0.500	0.500	0.611	0.333	0.333
	36"(914mm)	0.611	0.583	0.583	0.611	0.389	0.389
	42"(1067mm)	0.611	0.667	0.611	0.611	0.444	0.444
	48"(1219mm)	0.611	0.750	0.611	0.611	0.500	0.500
	60"(1524mm)	N/A	0.917	0.917	0.611	0.611	0.611

PREMISE Vertical Storage Unit Tackboards

Nominal (Inches)	54 Inch Roll (Linear Yards)			66 Inch Roll (Linear Yards)		
Height	Directional	Railroad	Non-directional	Directional	Railroad	Non-directional
48"(1219mm)	0.65	0.71	0.65	0.65	0.47	0.47
60"(1524mm)	N/A	0.87	0.87	0.65	0.58	0.58
66"(1676mm)	1.30	1.05	1.05	1.30	0.70	0.70
72"(1828mm)	1.30	1.13	1.13	1.30	0.75	0.75

North American Terms of Sale

These Terms of Sale are part of a quotation, bid response, or other sales document issued by Haworth, Inc., Haworth, Ltd. ("Haworth").

These Terms of Sale do not cover products manufactured in North America shipping to non-North American countries nor do they cover products manufactured in non-North American countries shipping to North America. For those terms of sale, please contact Haworth's Global Trade and Compliance Department at 616.393.3000 or through Haworth.com.

A. Ordering Information

Haworth sells its products on the terms set forth in these standard Terms of Sale:

ORDERS MUST BE SUBMITTED IN WRITING OR ELECTRONICALLY (Lynx) AS REPRESENTED BY A VALID PURCHASE ORDER, WHICH INCLUDES PRODUCT TOTAL.

An order is not binding upon Haworth until Haworth issues an order acknowledgment to the customer (the "Customer"), which will include price information and an anticipated delivery date.

1. Order Changes/Cancellations

For Specials, Customer's Own Material (C.O.M.), finish matches, custom colors, custom products, Master lock and key orders, and RUSH orders, no changes or cancellations are allowed 24 hours after order placement. All other products require approval for changes or cancellations. A change/cancellation fee may apply. Contact Order Services for applicable charges.

Ship-to addresses changed within five (5) business days of delivery will incur fees to cover administrative costs due to re-labeling of product and/or reconsignment fees with the carrier.

Order cancellations are complete annulments of orders. Order changes are the deletion of line items or a change in size, color, quantity, ship-to address, or scope of work. There is no penalty for additions; however, any change may cause the order or the line items affected to be rescheduled. Order changes involving additional product and services which increase the value must be accompanied by an amended Purchase Order or other document as agreed.

ALL CHANGES MUST BE IN WRITING, REGARDLESS OF THE (DOLLAR) VALUE. CHANGES ARE NOT BINDING UPON HAWORTH UNTIL HAWORTH ISSUES AN ACKNOWLEDGMENT OF THE CHANGE.

2. C.O.M. (Customer's Own Material)

A Customer who requests a fabric, surface or finish material (C.O.M.) not in Haworth's standard finish offering must first confirm approval of or request new approval for the C.O.M.

Haworth will determine feasibility of the material for manufacturability. For a description of the procedure to submit C.O.M. samples, contact Haworth's Order Services department. For testing information, see the C.O.M. section of the catalog, or call Haworth Order Services.

If Haworth agrees to use the C.O.M., (1) Haworth shall have no responsibility for the condition, quality, value, performance, physical properties, or any other aspect of the C.O.M.; and (2) Haworth shall have no liability for any damages, injuries, or losses to the Customer or to any third party that shall be caused by any C.O.M., and the Customer shall hold Haworth harmless for all such liability.

3. Valid/Complete Purchase Order

The following information is required in order to process an order with Haworth:

a. Customer Information

- i. **Sold To:** Legal name, complete address (if Haworth is to bill the end user, provide end user Purchase Order made out to Haworth, Inc., Haworth, Ltd.) and phone and fax number.
- ii. **Ship To:** Legal name and address.
- iii. **Purchase Order Number:** From the party Haworth will be billing.
- iv. **Authorized Signature:** All Purchase Orders must be signed by a duly authorized representative if a signature line is present. Electronically transmitted Purchase Orders will be accepted without a signature if dealer billed and the dealer has an electronic purchase payment agreement on file.
- v. **Contact Name and Phone Number:** Person Haworth should contact with any questions regarding the order.
- vi. **Shipping Contact:** Name and phone number of person to be contacted regarding shipping and delivery matters.
- vii. **Tagging Instructions:** This information will appear on all documentation received from Haworth including: cartons, acknowledgments, and invoices.
- viii. **Price Agreement or National Sales Agreement Number**
- ix. **Product Total:** Net dollars.
- x. **Installation, Design, Project Management, and/or Service Fees**

b. Product Information

- i. **Quantity**
- ii. **Product Numbers**
- iii. **Colors**
- iv. **Specials:** Specify special part number for new special products.
- v. **Customer's Own Material:** Order entry code, manufacturer, pattern, and color.

- vi. **Approval Drawings:** An authorized signature by a duly authorized representative is required for shop drawings when applicable.
- vii. A deposit may be required for custom materials.

c. Order Confirmation

All orders will be acknowledged.

B. Pricing Policies

1. Terms of Payment

Terms of payment and credit limits will be established based on financial information. Standard payment terms on open credit are net thirty (30) days from invoice date. Advance payments or other payment security may be required by Haworth. The account balance must be at or below the credit limit and current at all times (no past-due balances). Haworth reserves the right to delay or cancel any delivery to a Customer whose Haworth account balance is over the credit limit and/or past due. For walls and floors a deposit will be required.

2. Terms of Credit

Customer hereby authorizes Haworth to obtain such credit reports, financial information or other information as Haworth may request, including, without limitation, credit information from any financial institutions or others having a business relationship with the Customer. Customer hereby authorizes any credit references to answer Haworth's inquiries and provide such credit information and documentation as Haworth may request.

The Customer hereby releases and holds Haworth harmless for any inconvenience whatsoever, caused by any temporary or permanent withdrawal or restriction of credit privileges hereunder, or the enforcement of any of the provisions contained in this paragraph.

3. Past-Due Charges

Past-due balances will be increased by a maximum of 1.5% per month, or 18% annually, without forfeit of Haworth's right to immediate payment.

4. Applicable Prices

The price of any product sold to Customer by Haworth will be based upon the North American Price List (Catalog).

Prices and discounts are subject to change without notice or approval. In the event of an adjustment to pricing, National Sales Agreement (NSA) Customers will be notified in advance according to the terms of the NSA.

Applicable prices and currency exchange rates are those in effect at the time of the RECEIPT of an **ORDER**; Haworth reserves the right to use the published pricing effective at the time of shipment, if the requested delivery date is more than 120 days after the order receipt date.

North American Terms of Sale

Haworth Flooring products are sold using the North American price list in US dollars. Currency exchange rates at the time of the transaction will be used to convert the USD amount into the alternate currency. Should the currency exchange rate between the USD and alternate currency change between a quote and the receipt of an order, the alternate currency amount will also change to equal the current, equivalent USD amount.

5. C.O.M. (Customer's Own Material) Charges

Refer to appropriate Customer's Own Material (C.O.M.) form for applicable surface material charges.

6. Taxes

Haworth prices do not include customs duty, sales, use, value added or similar taxes. Any federal, state/provincial or other taxes or assessments based upon the sale or delivery of products or services sold applicable to the customer at present or later imposed by federal, state/provincial or municipal agencies, shall be added and paid by the customer. Customer is responsible for all such taxes.

NOTE: For all countries a valid sales tax exemption certificate must be approved by and on file with Haworth prior to product shipment. Otherwise, sales tax will be due and payable to Haworth when such tax is invoiced to Customer.

7. Services

If, as a result of Customer request, the Haworth dealer or Haworth subsidiary provides planning/design services, storage, project management, special handling, set-up, installation and/or other services, the Customer will be charged at the local Haworth dealer/subsidiary's prevailing rates.

8. Termination by Haworth

Haworth may immediately terminate an order upon written notice in the event bankruptcy or insolvency proceedings are instituted by or against the Customer, or the Customer is adjudicated as bankrupt, becomes insolvent, makes an assignment for the benefit of creditors, or proposes or makes any arrangements for the liquidation of its debts, or a receiver or receiver and manager is appointed with respect to all or any part of the assets of the Customer.

C. Shipping and Delivery

Haworth will have the right to determine the method of shipment and routing of product.

This section does not apply to any of Haworth's Flooring products. All Haworth Flooring products are sold freight collect.

If, for any reason, a delivery has to be made to an intermediate location (i.e. a location other than the "Ship To" location noted on the order or ultimate end user location), all handling and re-delivery costs incurred would be at the Customer's expense.

1. U.S.A. - Contiguous

All deliveries will be CPT (Carriage Paid To) (ICC Incoterms 2010). Haworth's manufacturing facilities or distribution centers. Freight charges will be prepaid by Haworth on all orders to locations within the continental United States. Customer bears all risk of loss or damage to the goods when they are placed on Haworth's means of transport.

2. U.S.A. - Non-contiguous (Alaska, Hawaii and Puerto Rico)

All deliveries will be CIF (Cost, Insurance and Freight) (ICC Incoterms 2010). Haworth's catalog prices include ocean freight and insurance to the port of the final destination. Haworth has the right to determine the carrier, method of shipment and routing. Haworth will contract with the insurer and provide minimal insurance coverage (CIF @ 110%) made payable to the Customer. Customer is responsible to obtain greater insurance if so desired.

Customer bears all risk of loss or damage to the goods when the goods are effectively at the disposal of the Customer on board the vessel at the named port of destination. Proof of delivery is a clean on board bill of lading. Customer will be responsible for all on-carriage from the receiving port to the final destination.

3. Canada

All deliveries will be DDP (Delivered Duty Paid) (ICC Incoterms 2010). Haworth's catalog prices include delivery to Customer's named place, not unloaded from any arriving means of transport. Customer bears all risk of loss or damage to the goods when they are delivered to the Customer's named facility not unloaded. Haworth will assume responsibility to file all freight claims with the carrier for any loss/damage which may occur while product is in transit, and will promptly repair or replace any damaged or lost product. Haworth requires the Customer to report all freight damage and/or loss to both the carrier and to Haworth.

NOTE: Under all delivery terms (U.S.A. and Canada), any additional expense resulting from Customer's request for expedited transportation, special services, packaging, handling, routing, and/or shipping method will be billed to Customer.

4. Mexico

All deliveries will be DAP (Delivered to Place) (ICC Incoterms 2010). Haworth's catalog prices include freight charges for normal surface transportation to a United States point of exportation within the 48 contiguous states. Haworth has the right to determine the carrier, method of shipment and routing.

Customer bears all risk of loss or damage to the goods when the goods are delivered to the named United States point of exportation. Haworth will provide customs clearance facilitation and arrangement of local delivery through an Authorized Dealer in Mexico, on a separately negotiated basis. Otherwise the Customer will be responsible for all customs clearance formalities and on-carriage from the United States point of exportation to the final destination in Mexico.

5. Delivery Dates and Delay

If Haworth cannot deliver products as scheduled due to causes beyond its reasonable control (such as casualty, labor disputes, or accident; inability to obtain necessary labor, material or transportation; or changes requested by the Customer), the delivery date will be extended to compensate for the delay as determined by Haworth.

6. Delivery Shortages and Damage

Product shortages and damage must be noted on delivery receipts at the time of delivery and reported to the carrier for correction.

Claims against Haworth for shortages, errors, or damage must be made within ten (10) days of the date of delivery or the Customer waives the right to make such a claim. Signed Bill of Ladings or Delivery Receipt must be sent in with claims. See the Haworth/Haworth Dealers Roles and Responsibilities document for further details.

7. Storage

Haworth may transfer product to storage at the Customer's risk and expense if the Customer is unable or unwilling to take delivery of product as originally scheduled. Upon such transfer to storage, the Customer assumes risk of loss. Haworth will invoice the Customer for storage fees and the Customer will make payments in accordance with Haworth's standard payment terms.

North American Terms of Sale

D. General Terms

1. Governing Law

For products purchased for delivery in the U.S. pursuant hereto, this Agreement shall be governed by and construed according to the laws of the State of Michigan. Where Products are purchased for delivery in Canada pursuant hereto, this Agreement shall be governed by and construed according to the laws of the Province of Alberta. In either case, the parties attorn to the exclusive jurisdiction of the courts of Michigan and Alberta, respectively for the purpose of hearing any disputes arising under this Agreement or with respect to any Products sold pursuant hereto, and agree that the provisions of the United Nations Convention on Contracts for the International Sale of Goods and any other provision or law which would have the effect of applying the laws of any jurisdiction other than Michigan or Alberta, as the case may be, shall be excluded.

2. Force Majeure

In the event that the performance of Customer or Haworth or its participating dealer assignee(s) would be prevented, restricted, interfered with or rendered commercially impracticable by reason of Force Majeure, then upon the giving of notice to the other parties, the party affected by the Force Majeure shall be excused from performing hereunder until the Force Majeure no longer prevents, restricts, interferes with, or renders such performance commercially impracticable.

"Force Majeure" shall mean: fire, explosion, breakdown of plant, epidemic, hailstorm, snow/ice storms en route, hurricane, tornado, cyclone, flood or power failure; war, revolution, civil or military disturbances, acts of public enemies, acts of terrorism, blockade or embargo; any law, order, proclamation, regulation, ordinance, demand or requirement of any applicable governmental authority or any subdivision, authority, or representative of any such government; labor difficulties, including without limitation, strikes, slowdowns, picketing or boycotts; or difficulties beyond Haworth's reasonable control in obtaining necessary raw materials, labor, fuels and electric power, components or facilities, and any other circumstances beyond the control of the party affected.

3. Delays by Customer

Where Haworth has not received adequate site dimensions, Product specifications, shipping information, installation particulars or other information required by Haworth to permit the efficient manufacture of any Products, or where site conditions are not in accordance with the Installation Requirements set forth, or are not otherwise suitable to permit effective and efficient installation, the manufacture and/or delivery of Products may be delayed, and such event shall constitute a delay by the Customer. When manufacture, delivery or installation is delayed by the Customer or at the Customer's

request: (i) Haworth may, at its option, present the invoice for the full price of the Products to the Customer as then due and payable; (ii) the Customer shall pay to Haworth all reasonable storage, handling and other reasonable incidental expenses incurred by Haworth in connection with such delay; and (iii) the Customer shall bear all risk of loss or damage to the Products being held by Haworth for the Customer.

4. Use and Installation of Products

Haworth recommends that its products be installed by certified, qualified and approved installers according to Haworth's written installation procedures. The Customer agrees to use Haworth products properly; not to remove or alter safety devices, warnings, or operation instructions placed on products by Haworth, and to instruct employees as to the proper care and use of the products according to printed instructions.

5. Warranty

Haworth's standard North American Warranty will apply as appropriate. All product line warranty specifics are available in each catalog or upon request.

E. Services

Service requests for design, installation, relocation, storage, etc. are handled by the local Haworth dealer on a separately negotiated basis. Contact the local Haworth dealer, affiliate or area sales office for more details.

Scope of Work - Design

Customer acknowledges that the Products to be manufactured or procured by Haworth in connection with the order are or may be custom manufactured for the Customer and that Haworth may be required to perform extensive work in relation to the design and specification of such Products. Where Customer requests that Haworth create as-built drawings or make more than two material revisions to any particular Product design or specification, Customer agrees that Haworth shall be entitled to invoice Customer with respect to such additional work on the basis of Haworth's then prevailing rates for related design and specification services.

Installation Requirements

Where installation services are to be provided by Haworth, its authorized dealer or subcontractor, a document will be provided setting forth the scope of installation work to be performed (the "Scope of Work") and the price to be charged therefore. Unless otherwise specified in the scope of work, Haworth's installation services are limited to products sold by Haworth with the exception of lighting, under floor electrical and data.

General Conditions

(a) Sufficient time shall be allocated by the Customer following delivery of Products and prior to Customer's occupation of the premises to allow the installation of all Products during conventional working hours, Monday through Friday, 7:30 a.m. to 4:30 p.m. Where sufficient time is not allocated and Haworth is required or requested to perform installation work outside of such times, overtime charges shall be charged at Haworth's then prevailing rates. (b) Haworth shall be given free and exclusive access to; (i) a loading dock within 150' of the freight elevator or hoist, which loading dock shall be of sufficient size to enable full-size tractor-trailer deliveries to the premises (where required by Haworth); (ii) a freight elevator or hoist of sufficient size and capacity to allow the efficient movement of the Products; (iii) an unobstructed and safe pathway to the area where Products are to be stored or staged; (iv) a secure storage / staging area; (v) convenient trash facilities; (vi) adequate lighting; (vii) a work site that complies with applicable health and safety legislation. Where such areas and facilities are not available, Haworth shall be entitled to bill Customer for all amounts incurred by Haworth for double-handling, product movement, lifting, hoisting, trash removal and any other resulting charges. (c) The installation site shall be free and clear of existing furniture, debris, or other obstructions (including construction in progress) and shall otherwise be in the reasonable opinion of Haworth ready for installation of the Products. Any building where Products are to be installed shall be fully closed in, dry and protected from the natural elements, with temperatures between 40°F and 90°F (4°C and 32°C) and relative humidity not to exceed 70% at all times including receipt of products, during and after installation and shall be adequately heated and/or air-conditioned. Where unusual site conditions exist which impede or prevent the normal installation of any Products, applicable extra charges shall apply at prevailing rates. (d) Haworth's installation pricing is based upon the installation occurring as one continuous delivery and installation project. Phased installation pricing shall be provided by Haworth on a case by case basis. (e) Electrical hardwiring, plumbing and mechanical work is not included and shall be the responsibility of the Customer. (f) Except as may be otherwise specifically indicated, installation pricing does not apply to projects where union labor is required. Where Haworth has provided installation pricing on the basis that non-union labor be utilized, and where Haworth is required to use union labor or it otherwise becomes impractical to use non-union labor, or where Haworth is required by law to use prevailing wages, Haworth shall be entitled to charge the Customer for any cost differential between the anticipated cost of non-union labor and the actual cost of utilizing union or prevailing wage labor. (g) Haworth shall not be responsible for obtaining permits.

North American Terms of Sale

Project / Site Conditions

Lateral load bracing is not included in the scope of Haworth's work and shall not be performed by Haworth. In areas where flooring Products are to be installed by Haworth overhead construction must be completed prior to the commencement of such work to avoid damage to the panels and finishes. The existing subfloor must be smooth, mopped clean, free of moisture, dust, dirt and debris. Once installed, the access floor must be maintained in the same manner. The subfloor must have a maximum vertical elevation deviation of 0.375" (10mm) over a horizontal span of 10'-0" (3m), and without discontinuities in floor slope. For greater certainty, the scope of Haworth's installation work in such areas shall not be deemed to include any work required to level such subfloor, remove protrusions, remove pre-existing floor coverings or adhesives, or any other work which is required to remedy any conditions which may impede the efficient installation of flooring. Except as may be otherwise specifically indicated in the order, installation pricing for flooring Products and the Scope of Work in relation thereto shall not include any work required to remove and replace floor panels following their initial installation to provide tradespersons or others with access to the underpanel cable management cavity. In areas where movable walls are to be installed, all flooring (including carpeting) and ceiling components (including dropped ceiling grid components) shall be fully complete and ready for the installation of the movable wall products. Further, the existing floor (or other surface on which the movable wall panels are to be installed) shall have a maximum vertical deviation of 1.25" (30mm) and the dropped ceiling grid shall have a maximum vertical deviation of 0.375" (10mm) from the specifications to which such movable wall panels were designed and manufactured (collectively the "Permitted Tolerances"), and shall otherwise comply with any site condition assumptions made known to Haworth prior to the manufacture of such Products (the "Site Assumptions"). Where the Permitted Tolerances or Site Assumptions are not strictly adhered to or met, additional charges may be incurred in connection with site remediation and/or the modification or remanufacture of affected movable wall products, together with all resulting shipping and labor charges at Haworth's then prevailing rates for such Products and services.

Installation Change Orders

Where Customer requests work to be performed or materials to be provided which are not contemplated in the Scope of Work, or Customer otherwise requests Products or services not contemplated in the order (collectively "Extras"), prior to providing such Extras Haworth reserves the right to require the Customer to provide and sign a written Purchase Order or Change Order acceptable to Haworth describing the Extras and the amounts to be charged therefore, and the Customer agrees to pay such charges.

Entire Agreement

The order and this Agreement (including applicable Schedules) constitute the sole agreement between the parties and supercede any prior understanding or written or oral agreements between the parties (excluding National Sales Agreements). No waiver of any of the provisions of these Standard Terms and Conditions shall be binding on Haworth unless expressly agreed in writing.

Revision Date: June 1, 2015

Index

Products are listed alphabetically in this index by alpha-numeric prefix/suffix codes.

Product Code	Product Description	Page
7031-7002	Belong® Work Tools – Markerboard Accessories	660
7062-8001	Belong® Work Tools – Markerboard Accessories	660
BBF-AC	Visual Privacy Elements — Screens – Frosted Insert	451
BBF-MB	Visual Privacy Elements — Screens – Markerboard / Perforated Metal Insert	452
BBF-MC	Visual Privacy Elements — Screens – Markerboard / Frosted Insert	452
BBF-PB	Visual Privacy Elements — Screens – Perforated Metal Insert	451
BBP-FN	Visual Privacy Elements – Enhanced PREMISE — for Monolithic/Stack Applications	300
BEDP	Electrical and Communication Accessories – Desktop Port	498
KU6M-2NNN	Monitor Arms – Extend Arm	612
DBKC-48	Work Tools – Team Master Kit	657
DBKP-48	Work Tools – File Master Kit	657
DBKP-S	Work Tools – File Master Kit	653
DBKS-36	Work Tools – Mini Master Kit	658
DBKS-48	Work Tools – Mini Master Kit	658
DBKS-S	Work Tools – Mini Master Kit	653
DBKT-48	Work Tools – Task Master Kit	657
DBKT-S	Work Tools – Task Master Kit	653
DMSP	Work Tools – Mini Shelf	649
DPKC-48	Work Tools – Team Master Kit	657
DPKP-48	Work Tools – File Master Kit	657
DPKP-S	Work Tools – File Master Kit	653
DPKS-36	Work Tools – Mini Master Kit	658
DPKS-48	Work Tools – Mini Master Kit	658
DPKS-S	Work Tools – Mini Master Kit	653
DPKT-48	Work Tools – Task Master Kit	657
DPKT-S	Work Tools – Task Master Kit	653
DS-3	Worksurface Accessories – Shallow Drawer	604
DSR-F	Work Tools – Freestanding Mount Rail	655
DSR-H	Work Tools – Panel Mount Rail	654
DSR-W	Work Tools – Worksurface Mount Rail	654
DTAR-3	Work Tools – Personal Shelf Bracket	650
DTBS-3	Work Tools – Phone Shelf Bracket	650
DTES-1	Work Tools – Personal Shelf	656
DTES-3	Work Tools – Personal Shelf	650
DTGK-3	Work Tools – Gooseneck Kit	649
DTHT-1	Work Tools – Tote Strap	652
DTLS-2	Work Tools – Letter Tray Stacking Kit	652
DTLT-2	Work Tools – Letter Tray	651
DTPR-1	Work Tools – Paper Sorter	656
DTPR-3	Work Tools – Paper Sorter	650
DTPT-1	Work Tools – Phone Shelf	656
DTPT-3	Work Tools – Phone Shelf	650
DTRB	Work Tools – Waste Bin	652
DTSB-1	Work Tools – Letter Tray Stacking Bracket	652
DTSB-3	Work Tools – Binder Bin	649
DTTE-3	Work Tools – Tote	649
DTTH-3	Work Tools – Tote	649
DTTS-12	Work Tools – Tack Strip	649
DTTS-24	Work Tools – Tack Strip	649
DTWC-2	Work Tools – Tool Cup	651
ENEJ-0048-2WF	PREMISE 4-Circuit (2+2 and 3+1) – Electrical Components – Raised Floor Infeed Base Feed Module	476

Index

Product Code	Product Description	Page
ENEJ-0048-3WF	PREMISE 3-Circuit – Electrical Components – Raised Floor Infeed Base Feed Module	454
ENEJ-0048-4WF	PREMISE 4-Circuit (2+2 and 3+1) – Electrical Components – Raised Floor Infeed Base Feed Module	476
EUD1-0000-1311V	Electrical and Communication Accessories – Enhanced Power Module	499
EUD1-0000-C311V	Electrical and Communication Accessories – Enhanced Power Module	499
EUE1-1111W	Electrical and Communication Accessories – Flip Top Unit	500
EUE1-1331W	Electrical and Communication Accessories – Flip Top Unit	500
EUE1-1B01W	Electrical and Communication Accessories – Flip Top Unit	500
EUE1-C331W	Electrical and Communication Accessories – Flip Top Unit	500
EUE2-1331W	Electrical and Communication Accessories – Flip Top Unit	500
EUE2-C331W	Electrical and Communication Accessories – Flip Top Unit	500
EUEJ-2WF	PREMISE 4-Circuit (2+2 and 3+1) – Electrical Components – Systems Furniture Power Interface Jumper	477
EUEJ-3WF	PREMISE 3-Circuit – Electrical Components – System Furniture Power Interface Jumper	455
EUEJ-4WF	PREMISE 4-Circuit (2+2 and 3+1) – Electrical Components – Systems Furniture Power Interface Jumper	477
FBEW	PREMISE 3-Circuit – Electrical Components – Wall Feed Field Wired 1 Port	455
FBEW	PREMISE 4-Circuit (2+2 and 3+1) – Electrical Components – Wall Feed Field Wired 1 Port	477
HKMP-1	Boogie Board – Boogie Board Mouse Pad	605
HKTC-M	Boogie Board – Boogie Board Keyboard Tray with Palm Rest and Integrated Mouse Pad	605
HKTC-N	Boogie Board – Boogie Board Keyboard Tray with Palm Rest	605
HKTE-M	Boogie Board – Boogie Board Keyboard Tray with Palm Rest and Integrated Mouse Pad	605
HKTE-N	Boogie Board – Boogie Board Keyboard Tray with Palm Rest	605
JAKA-18	Worksurface Supports – Worksurface Height Adjustment Kit for Attached Pedestal	598
JAP-2	Electrical and Communication Accessories – Power/Data Dome	498
JAP-4	Electrical and Communication Accessories – Power/Data Dome	498
JCPB-SS1A	X Series Combination Units – Attached – Two-High Combination — Attached	680
JCPG-SS1A	X Series Combination Units – Attached – Two-High Combination — Attached	680
JCPJ-SS1A	X Series Combination Units – Attached – Two-High Combination — Attached	680
JCPJ-SS1A	X Series Combination Units – Attached – Two-High Combination — Attached	680
JCPL-12	X Series and V Series Accessories – Filing Kit	676
JCPR-S1A	X Series Storage Cabinets — Attached/Freestanding – Two-High Combination — Attached	678
JCPT-S1A	X Series Storage Cabinets — Attached/Freestanding – Two-High Combination — Attached	678
JLPD-S1A	X Series Lateral Files — Attached – Two-High Lateral File — Proud Style — Attached	673
JLRD-SJA	X Series Lateral Files — Attached – Two-High Lateral File — Inset Style — Attached	674
JPAH-24	X Series Attached Pedestals – Box/Box/File — Attached	670
JPAJ-24	X Series Attached Pedestals – File/File — Attached	670
JPAQ-24	X Series Attached Pedestals – Pencil/Pencil/Box/File — Attached	670
JSHA-1	X Series and V Series Accessories – Worksurface Height Adjustment Kit for Attached Lateral File, Storage Cabinet and Combination Unit	676
JSPY-S1A	X Series Storage Cabinets — Attached – Two-High Storage — Attached	677
KU1A-0017	Adjustable Keyboard Pads – Locking Tilt AKP	606
KU1C	CPU Holders – Fixed Mount CPU Holder	613
KU1C	CPU Holders – Fixed Mount CPU Holder	613
KU1D	Accessories – Adjustable Document Holder	614
KU1F	Accessories – Adjustable Footrest	614
KU1L-U	Accessories – Adjustable Laptop Holder	614
KU1M-1NN	Monitor Arms – Post and Link Monitor Arms	611
KU1M-2NN	Monitor Arms – Post and Link Monitor Arms	611
KU2A-0017	Adjustable Keyboard Pads – Dial Tilt AKP	606
KU2C-L	CPU Holders – Adjustable CPU Holder	613
KU3A-0023	Adjustable Keyboard Pads – Dial Tilt AKP - Extended Arm	607
KU3M-1NN	Monitor Arms – Heavy Duty Adjustable Monitor Arms	611
KU3M-2NN	Monitor Arms – Heavy Duty Adjustable Monitor Arms	611
KU4A-0023	Adjustable Keyboard Pads – Sit-to-Stand AKP	607
KU4M-1NNN	Adjustable Keyboard Pads – Advanced Adjustable Monitor Arms	610

Index

Product Code	Product Description	Page
KU4M-2NNN	Adjustable Keyboard Pads – Advanced Adjustable Monitor Arms610
KU5A	Adjustable Keyboard Pads – Thin Profile AKP609
KU5M-1NNN	Monitor Arms – Adjustable Post Arm612
KU5M-2NNN	Monitor Arms – Adjustable Post Arm612
KU6M-1NNN	Monitor Arms – Extend Arm612
KU6M-2NNN	Monitor Arms – Extend Arm612
KU6T	Belong Work Tools – Tool Cup648
KUAF	Wall Mount Components – Tackboard, Wall Mount633
KUAM	Wall Mount Components – Markerboard, Wall Mount633
KUCU-0915-BNN	Belong Work Tools – Open C Cubby648
KUCU-1215-BNS	Belong Work Tools – Open C Cubby648
KUDP	Worksurface Accessories – Pencil + Drawer604
KUP1-0000-CSN	Belong Work Tools Mounting Rails – Tool Rail — Single Post — C-Clamp or Thru-Mount647
KUPT-0913-F	Belong Work Tools – Paper Tray — Landscape648
KUPT-0913-H	Belong Work Tools – Paper Tray — Landscape648
KUPY	Wall Mount Components – Slat, Wall Mount633
KUR1-0424-PZN	Belong Work Tools Mounting Rails – Tool Rail — Panel Mount — Single Side645
KUR1-1224-CSN	Belong Work Tools Mounting Rails – Tool Rail — Worksurface Mount C-Clamp or Thru-Mount646
KUTC-0000-H	Belong Work Tools – Tool Cup648
LBJ1	BRAZO – Freestanding Lighting639
LBJ2	BRAZO – Freestanding Lighting639
LBJ3	BRAZO – Mounted Lighting639
LBJ4	BRAZO – Mounted Lighting639
LLC1	LIM – LIM C641
LLC2	LIM – LIM C641
LLL1	LIM – LIM L640
LLL2	LIM – LIM L640
LLL3	LIM – LIM L640
LLA	LIM – LIM L640
LLM1	LIM – LIM Mounted642
LLM1	LIM – LIM Mounted642
LLM2	LIM – LIM Mounted642
LLU1	LIM – LIM Mounted643
LLU2	LIM – LIM Mounted643
LLY1	LIM – LIM Y641
LUPT	Lighting – Pixo638
LUTD	Lighting – Adaptable Electronic Ballast Task Light (Add-On Light)637
LUTD-0017-1NULDN	Lighting – Reed Premier™ Add-On LED Task Light — For Use with Reed Premier Starter LED Task Lights635
LUTR	Lighting – Adaptable Electronic Ballast Task Light (Starter Light)636
LUTS-0000	Lighting – Reed Premier™ Add-On Occupancy Sensor635
LUTS-0017-12ULD6	Lighting – Reed Premier™ Starter LED Task Light634
LUTS-0017-19ULD5	Lighting – Reed Premier™ Stand-Alone LED Task Light634
LUTS-16UEP	Lighting – Adaptable Electronic Ballast Task Light636
LUV1	Lighting – Voyage without Occupancy Sensor638
LUV2	Lighting – Voyage with Occupancy Sensor638
MAC-0001	Worksurface Accessories – Make-A-Corner602
NAB	Work Tools – Tackboard659
NABK	Transitional Panel Connectors – Enhanced PREMISE Straight Connector to 4" PREMISE Stack Panel390
NABS	Transitional Panel Connectors – Enhanced PREMISE Straight Connector to 4" PREMISE Monolithic Panel390
NADR-8	Wall Mount Components – Shelf Dividers631
NAH-12	Work Tools – All Purpose Hooks659
NAH-12-S	Work Tools – All Purpose Hooks659
NAM	Work Tools – Markerboard659

Index

Product Code	Product Description	Page
NAPY	Task Organization – Wall Accessory Slat Pad	644
NAT	Work Tools – Tack Strip	659
NBAC	Visual Privacy Elements — Panel Attached – Canopy — Topper Mount	443
NBBD-F	Visual Privacy Elements — Panel Attached – Fabric Scrim Insert	441
NBBD-X	Visual Privacy Elements — Panel Attached – Translucent Insert	441
NBBF-F	Visual Privacy Elements — Panel Attached – Fabric Scrim	442
NBBF-X	Visual Privacy Elements — Panel Attached – Translucent	442
NBCD	Visual Privacy Elements — Worktop Mounted Screens – Worktop Mounted Screen Canopy	448
NBCP	Visual Privacy Elements — Panel Attached – Canopy — Top Cap Mount	443
NBDM-F	Visual Privacy Elements — Worktop Mounted Screens – Fabric Scrim — Stand Alone Kit	444
NBDM-F	Visual Privacy Elements — Worktop Mounted Screens – Fabric Scrim — Stand Alone Kit	446
NBDM-M	Visual Privacy Elements — Worktop Mounted Screens – Markerboard — Stand Alone Kit	445
NBDM-M	Visual Privacy Elements — Worktop Mounted Screens – Markerboard — Stand Alone Kit	447
NBDM-X	Visual Privacy Elements — Worktop Mounted Screens – Translucent — Stand Alone Kit	444
NBDM-X	Visual Privacy Elements — Worktop Mounted Screens – Translucent — Stand Alone Kit	446
NBDP	Visual Privacy Elements — Panel Attached – Double Canopy — Double Top Cap Mount	443
NBFS-F	Visual Privacy Elements – Fabric Scrim Insert	449
NBFS-M	Visual Privacy Elements – Markerboard Insert	450
NBFS-X	Visual Privacy Elements – Translucent Insert	449
NBPA-F	Visual Privacy Elements — Panel Attached – Fabric Scrim — Stand Alone Kit	438
NBPA-X	Visual Privacy Elements — Panel Attached – Translucent — Stand Alone Kit	438
NBSG	Visual Privacy Elements — Panel Attached – Support Grips	440
NBSP-F	Visual Privacy Elements — Panel Attached – Fabric Scrim — Shared Kit	439
NBSP-X	Visual Privacy Elements — Panel Attached – Translucent — Shared Kit	439
NBVF-G	Panel Connectors and Trim Covers – Variable-Height Covers — Starter Cover	386
NBVF-S	Panel Connectors and Trim Covers – Variable-Height Covers — Starter Cover	386
NBVF-W	Panel Connectors and Trim Covers – Variable-Height Covers — Starter Cover	386
NBVP-G	Panel Connectors and Trim Covers – Variable-Height Covers — Starter Cover	386
NBVP-S	Panel Connectors and Trim Covers – Variable-Height Covers — Starter Cover	386
NBVP-W	Panel Connectors and Trim Covers – Variable-Height Covers — Starter Cover	386
NBVW-G	Panel Connectors and Trim Covers – Variable-Height Covers — Starter Cover	386
NBVW-W	Panel Connectors and Trim Covers – Variable-Height Covers — Starter Cover	386
NCBB	Upper Structure Elements — Stack Components – Standard Cross Bar	415
NCBL-2436-4	Tables – Bean — Laminate Top	668
NCBL-2436-4C	Tables – Bean — Laminate Top	668
NCBZ	Upper Structure Elements — Stack Components – Structural Cross Bar	415
NCCL	Tables – Round — Laminate or Wood Top	667
NCDL-3242-4	Tables – Bend — Laminate Top	668
NCMB-12	Panel Connectors and Trim Covers – Corner Connector Bracket	373
NCOL	Tables – Teardrop — Laminate Top	668
NCOL-C	Tables – Teardrop — Laminate Top	668
NCRL	Tables – Rectangular — Laminate or Wood Top	667
NCRW	Tables – Rectangular — Laminate or Wood Top	667
NCTA-LFG	Concentrative Tables – Asymmetric with Glides or Casters	666
NCTA-LFM	Concentrative Tables – Asymmetric with Glides or Casters	666
NCTA-LVG	Concentrative Tables – Asymmetric with Glides or Casters	666
NCTA-LVM	Concentrative Tables – Asymmetric with Glides or Casters	666
NCTC-LFG	Concentrative Tables – Collaborative with Glides or Casters	664
NCTC-LFM	Concentrative Tables – Collaborative with Glides or Casters	664
NCTC-LVG	Concentrative Tables – Collaborative with Glides or Casters	664
NCTC-LVM	Concentrative Tables – Collaborative with Glides or Casters	664
NCTN-LFG	Concentrative Tables – 90° with Glides or Casters	662
NCTN-LFM	Concentrative Tables – 90° with Glides or Casters	662

Index

Product Code	Product Description	Page
NCTN-LVG	Concentrative Tables – 90° with Glides or Casters	.662
NCTN-LVM	Concentrative Tables – 90° with Glides or Casters	.662
NCTO-LFG	Concentrative Tables – 120° with Glides or Casters	.661
NCTO-LFM	Concentrative Tables – 120° with Glides or Casters	.661
NCTO-LVG	Concentrative Tables – 120° with Glides or Casters	.661
NCTO-LVM	Concentrative Tables – 120° with Glides or Casters	.661
NCTT-LFG	Concentrative Tables – 60° with Glides or Casters	.663
NCTT-LFM	Concentrative Tables – 60° with Glides or Casters	.663
NCTT-LVG	Concentrative Tables – 60° with Glides or Casters	.663
NCTT-LVM	Concentrative Tables – 60° with Glides or Casters	.663
NCTY-LFG	Concentrative Tables – Symmetric with Glides or Casters	.665
NCTY-LFM	Concentrative Tables – Symmetric with Glides or Casters	.665
NCTY-LVG	Concentrative Tables – Symmetric with Glides or Casters	.665
NCTY-LVM	Concentrative Tables – Symmetric with Glides or Casters	.665
NDLS	Foundation Elements — Monolithic Panels — Single Door and Frame — Standard or Wood Top Cap	.299
NDLW	Foundation Elements — Monolithic Panels — Single Door and Frame — Standard or Wood Top Cap	.299
NDWS	Foundation Elements — Monolithic Panels — Single Door and Frame — Standard or Wood Top Cap	.299
NDWW	Foundation Elements — Monolithic Panels — Single Door and Frame — Standard or Wood Top Cap	.299
NEAP-0000	PREMISE Electrical Components — Power and Communication Bezel for Fabric/Tackable Pad	.497
NEAP-1	PREMISE 3-Circuit — Electrical Components — Power Distribution Support Bracket	.471
NEB-1-M	PREMISE Hardwire Electrical Components — Base Feed Module	.506
NEB-1-S	PREMISE Hardwire Electrical Components — Base Feed Module	.506
NEB-2	PREMISE 3-Circuit — Electrical Components — Single Circuit Base Feed Module — Receptacle Connection with Power Cord	.453
NEB-2-2	PREMISE 4-Circuit (2+2 and 3+1) — Electrical Components — Single Circuit Base Feed Module — Receptacle Connection with Power Cord	.474
NEB-2-4	PREMISE 4-Circuit (2+2 and 3+1) — Electrical Components — Single Circuit Base Feed Module — Receptacle Connection with Power Cord	.474
NEB-2-A	PREMISE 3-Circuit — Electrical Components — Single Circuit Base Feed Module — Receptacle Connection with Power Cord	.454
NEB-2-A2	PREMISE 4-Circuit (2+2 and 3+1) — Electrical Components — Single Circuit Base Feed Module — Receptacle Connection with Power Cord	.475
NEB-2-A4	PREMISE 4-Circuit (2+2 and 3+1) — Electrical Components — Single Circuit Base Feed Module — Receptacle Connection with Power Cord	.475
NEBF-1	PREMISE 3-Circuit — Electrical Components — Base Feed Module — Hardwire Connection	.453
NEBF-1-2	PREMISE 4-Circuit (2+2 and 3+1) — Electrical Components — Base Feed Module — Hardwire Connection	.474
NEBF-1-4	PREMISE 4-Circuit (2+2 and 3+1) — Electrical Components — Base Feed Module — Hardwire Connection	.474
NEBF-5	PREMISE 3-Circuit — Electrical Components — Base Feed Module — Concealed Hardwire Connection	.454
NEBF-5-2	PREMISE 4-Circuit (2+2 and 3+1) — Electrical Components — Base Feed Module — Concealed Hardwire Connection	.476
NEBF-5-4	PREMISE 4-Circuit (2+2 and 3+1) — Electrical Components — Base Feed Module — Concealed Hardwire Connection	.476
NEC	Electrical and Communication Accessories — Monolithic Panel Communications Port Kit	.502
NEC4	Electrical and Communication Accessories — Cable Trough	.503
NECB-2	Electrical and Communication Accessories — Single Gang Communication Adaptor Plate	.503
NECG-3-C	Electrical and Communication Accessories — 90° Corner Cable Guide	.504
NECG-3-S	Electrical and Communication Accessories — Straight Cable Guide	.504
NECG-5-C	Electrical and Communication Accessories — 90° Corner Cable Guide	.504
NECG-5-S	Electrical and Communication Accessories — Straight Cable Guide	.504
NECG-V	Electrical and Communication Accessories — Vertical Cable Guide	.503
NECH-1	Electrical and Communication Accessories — Cable Hanger	.503
NECK-1	Electrical and Communication Accessories — Information Plate Communication Port Kits	.502
NECK-2	Electrical and Communication Accessories — Information Plate Communication Port Kits	.502
NECR-1	Electrical and Communication Accessories — Cable Reel	.504
NEEA-1-C	PREMISE Hardwire Electrical Components — Powered Panel Port Kit	.507
NEF-1	PREMISE 3-Circuit — Electrical Components — Flexible Power Connector	.465

Index

Product Code	Product Description	Page
NEF-1-2	PREMISE 4-Circuit (2+2 and 3+1) – Electrical Components – Flexible Power Connector	487
NEF-1-4	PREMISE 4-Circuit (2+2 and 3+1) – Electrical Components – Flexible Power Connector	487
NEH-8	Electrical and Communication Accessories – Wire Management Loop	501
NEH-8	Worksurface Accessories – Wire Management Loop	602
NEJS	Transitional Power Connectors – Enhanced 3-Circuit PREMISE to 4" PREMISE Flexible Power Connector	391
NEJS-18	PREMISE 3-Circuit – Electrical Components – Extended Flexible Metal Power Connectors for Base Raceway	467
NEJS-18	PREMISE 4-Circuit (2+2 and 3+1) – Electrical Components – Extended Flexible Metal Power Connectors for Base Raceway	489
NEKA-P	PREMISE 3-Circuit – Electrical Components – Power Kit for Stack Application	461
NEKA-P2	PREMISE 4-Circuit (2+2 and 3+1) – Electrical Components – Power Kit for Stack Application	483
NEKA-P4	PREMISE 4-Circuit (2+2 and 3+1) – Electrical Components – Power Kit for Stack Application	483
NEKB-P	PREMISE 3-Circuit – Electrical Components – Stack Application Retrofit Kit	462
NEKB-P2	PREMISE 4-Circuit (2+2 and 3+1) – Electrical Components – Stack Application Retrofit Kit	484
NEKB-P4	PREMISE 4-Circuit (2+2 and 3+1) – Electrical Components – Stack Application Retrofit Kit	484
NEKC-00-PMP	PREMISE Hardwire Electrical Components – Electrical Raceway Kit — Base	506
NEKC-00-PS	PREMISE Hardwire Electrical Components – Electrical Raceway Kit — Base	506
NEKD-00-PC	PREMISE Hardwire Electrical Components – Electrical Raceway Kit — Beltline or Standing Height	507
NEKP	PREMISE 3-Circuit – Electrical Components – Base Raceway Retrofit Kit – Powered	471
NEKP-2	PREMISE 4-Circuit (2+2 and 3+1) – Electrical Components – Base Raceway Retrofit Kit – Powered	494
NEKP-4	PREMISE 4-Circuit (2+2 and 3+1) – Electrical Components – Base Raceway Retrofit Kit – Powered	494
NEKS-PS	PREMISE 3-Circuit – Electrical Components – Structural Power Kit for Stack Application	463
NEKS-PS2	PREMISE 4-Circuit (2+2 and 3+1) – Electrical Components – Structural Power Kit for Stack Application	485
NEKS-PS4	PREMISE 4-Circuit (2+2 and 3+1) – Electrical Components – Structural Power Kit for Stack Application	485
NEP-1	PREMISE 3-Circuit – Electrical Components – Power Break Marker	468
NEP-1	PREMISE 4-Circuit (2+2 and 3+1) – Electrical Components – Power Break Marker	491
NEPH-4	PREMISE 3-Circuit – Electrical Components – Super Base Panel-to-Stack Kit Beltline Vertical Power Connector	464
NEPH-4-2	PREMISE 4-Circuit (2+2 and 3+1) – Electrical Accessories – Super Base Panel-to-Stack Kit Beltline Vertical Power Connector	486
NEPH-4-4	PREMISE 4-Circuit (2+2 and 3+1) – Electrical Accessories – Super Base Panel-to-Stack Kit Beltline Vertical Power Connector	486
NEPH-5	PREMISE 3-Circuit – Electrical Components – Super Base Panel-to-Stack Kit Standing Height Vertical Power	464
NEPH-5-2	PREMISE 4-Circuit (2+2 and 3+1) – Electrical Accessories – Super Base Panel-to-Stack Kit Standing Height Vertical Power	486
NEPH-5-4	PREMISE 4-Circuit (2+2 and 3+1) – Electrical Accessories – Super Base Panel-to-Stack Kit Standing Height Vertical Power	486
NER-1	PREMISE 3-Circuit – Electrical Components – Triplex Receptacles – 15 Amp	468
NER-1500	PREMISE 4-Circuit (2+2 and 3+1) – Electrical Components – Triplex Receptacles – 15 Amp	490
NER-2000	PREMISE 4-Circuit (2+2 and 3+1) – Electrical Components – Triplex Receptacles – 20 Amp	491
NERC-1-C	PREMISE Hardwire Electrical Components – Receptacle Cover	507
NES-1	PREMISE 3-Circuit – Electrical Components – Straight-Span Flexible Power Connector	466
NES-1-2	PREMISE 4-Circuit (2+2 and 3+1) – Electrical Components – Straight-Span Flexible Power Connector	488
NES-1-4	PREMISE 4-Circuit (2+2 and 3+1) – Electrical Components – Straight-Span Flexible Power Connector	488
NETC-10-P	PREMISE 3-Circuit – Electrical Components – Floor-to-Ceiling Monolithic and Super Base Panel Top Feed Module	459
NETC-10-P2	PREMISE 4-Circuit (2+2 and 3+1) – Electrical Components – Floor-to-Ceiling Monolithic and Super Base Panel Top Feed Module	481
NETC-10-P4	PREMISE 4-Circuit (2+2 and 3+1) – Electrical Components – Floor-to-Ceiling Monolithic and Super Base Panel Top Feed Module	481
NETM-3T	PREMISE 3-Circuit – Electrical Components – Monolithic Panel Top Feed Module	456
NETM-3T2	PREMISE 4-Circuit (2+2 and 3+1) – Electrical Components – Monolithic Panel Top Feed Module	478
NETM-3T4	PREMISE 4-Circuit (2+2 and 3+1) – Electrical Components – Monolithic Panel Top Feed Module	478
NETM-3W	PREMISE 3-Circuit – Electrical Components – Monolithic Panel Top Feed Module	456
NETM-3W2	PREMISE 4-Circuit (2+2 and 3+1) – Electrical Components – Monolithic Panel Top Feed Module	478
NETM-3W4	PREMISE 4-Circuit (2+2 and 3+1) – Electrical Components – Monolithic Panel Top Feed Module	478
NETM-NT	PREMISE Hardwire Electrical Components – Monolithic Panel Top Feed Module	508

Index

Product Code	Product Description	Page
NETM-NW	PREMISE Hardwire Electrical Components – Monolithic Panel Top Feed Module	508
NETP-3T	PREMISE 3-Circuit – Electrical Components – Stackable Panel Top Feed Module	457
NETP-3T2	PREMISE 4-Circuit (2+2 and 3+1) – Electrical Components – Stackable Panel Top Feed Module	479
NETP-3T4	PREMISE 4-Circuit (2+2 and 3+1) – Electrical Components – Stackable Panel Top Feed Module	479
NETP-3W	PREMISE 3-Circuit – Electrical Components – Stackable Panel Top Feed Module	457
NETP-3W2	PREMISE 4-Circuit (2+2 and 3+1) – Electrical Components – Stackable Panel Top Feed Module	479
NETP-3W4	PREMISE 4-Circuit (2+2 and 3+1) – Electrical Components – Stackable Panel Top Feed Module	479
NETP-NT	PREMISE Hardwire Electrical Components – Stack Kit on Monolithic or Super Base Panel Top Feed Module	508
NETP-NW	PREMISE Hardwire Electrical Components – Stack Kit on Monolithic or Super Base Panel Top Feed Module	508
NETX-10-C	PREMISE Hardwire Electrical Components – External Top Feed Module	509
NETX-10-P	PREMISE 3-Circuit – Electrical Components – External Top Feed Module	458
NETX-10-P2	PREMISE 4-Circuit (2+2 and 3+1) – Electrical Components – External Top Feed Module	480
NETX-10-P4	PREMISE 4-Circuit (2+2 and 3+1) – Electrical Components – External Top Feed Module	480
NEV-1	Electrical and Communication Accessories – Vertical Wire Manager	501
NEV-2	Electrical and Communication Accessories – Vertical Wire Manager	501
NGSS-G1	Panel Connectors and Trim Covers – Straight Pre-Configured (Sectional) Connector	333
NGSS-GN	Panel Connectors and Trim Covers – Straight Pre-Configured (Sectional) Connector	333
NGSS-S1	Panel Connectors and Trim Covers – Straight Pre-Configured (Sectional) Connector	333
NGSS-SN	Panel Connectors and Trim Covers – Straight Pre-Configured (Sectional) Connector	333
NJ_A	Foundation Elements — Super Base Panel – Standard, Grooved, Wood Top Cap, or No Top Cap – Translucent Pads	322
NJA-32	Foundation Elements — Super Base Panel – Single Pad	326
NJF	Monolithic Pad Elements – Monolithic Single Pad	295
NJF-32	Foundation Elements — Super Base Panel – Single Pad	326
NJ-GA	Foundation Elements — Super Base Panel – Grooved Top Cap	308
NJ-GN	Foundation Elements — Super Base Panel – Grooved Top Cap	308
NJ-GP	Foundation Elements — Super Base Panel – Grooved Top Cap	308
NJH-32	Foundation Elements — Super Base Panel – Single Pad	326
NJ_N	Foundation Elements — Super Base Panel – Standard, Grooved, Wood Top Cap, or No Top Cap – Translucent Pads	322
NJNN-SA	Foundation Elements — Super Base Panel – Standard, Grooved, Wood Top Cap, or No Top Cap	324
NJNN-SN	Foundation Elements — Super Base Panel – Standard, Grooved, Wood Top Cap, or No Top Cap	324
NJNN-SP	Foundation Elements — Super Base Panel – Standard, Grooved, Wood Top Cap, or No Top Cap	324
NJ_P	Foundation Elements — Super Base Panel – Standard, Grooved, Wood Top Cap, or No Top Cap – Translucent Pads	322
NJP-32	Foundation Elements — Super Base Panel – Single Pad	326
NJ-SA	Foundation Elements — Super Base Panel – Standard or No Top Cap	302
NJ-SN	Foundation Elements — Super Base Panel – Standard or No Top Cap	302
NJ-SP	Foundation Elements — Super Base Panel – Standard or No Top Cap	302
NJW-32	Foundation Elements — Super Base Panel – Single Pad	326
NJ-WA	Foundation Elements — Super Base Panel – Wood Top Cap	314
NJ-WN	Foundation Elements — Super Base Panel – Wood Top Cap	314
NJ-WP	Foundation Elements — Super Base Panel – Wood Top Cap	314
NJX-32	Foundation Elements — Super Base Panel – Single Pad	326
NL2F-G1	Panel Connectors and Trim Covers – 2-Way 90°, Full-Height Connector with Full-Height Cover	335
NL2F-G2	Panel Connectors and Trim Covers – 2-Way 90°, Full-Height Connector with Full-Height Cover	335
NL2F-GN	Panel Connectors and Trim Covers – 2-Way 90°, Full-Height Connector with Full-Height Cover	335
NL2F-S1	Panel Connectors and Trim Covers – 2-Way 90°, Full-Height Connector with Full-Height Cover	335
NL2F-S2	Panel Connectors and Trim Covers – 2-Way 90°, Full-Height Connector with Full-Height Cover	335
NL2F-SN	Panel Connectors and Trim Covers – 2-Way 90°, Full-Height Connector with Full-Height Cover	335
NL2F-W1	Panel Connectors and Trim Covers – 2-Way 90°, Full-Height Connector with Full-Height Cover	335
NL2F-W2	Panel Connectors and Trim Covers – 2-Way 90°, Full-Height Connector with Full-Height Cover	335
NL2F-WN	Panel Connectors and Trim Covers – 2-Way 90°, Full-Height Connector with Full-Height Cover	335
NL2P-G1	Panel Connectors and Trim Covers – 2-Way 90°, Full-Height Connector with Full-Height Cover	335
NL2P-G2	Panel Connectors and Trim Covers – 2-Way 90°, Full-Height Connector with Full-Height Cover	335
NL2P-GN	Panel Connectors and Trim Covers – 2-Way 90°, Full-Height Connector with Full-Height Cover	335

June 2015 / N.A. **703**

Index

Product Code	Product Description	Page
NLAF-GN	Panel Connectors and Trim Covers – 2-Way 120°, Full-Height Connector with Full-Height Cover	344
NLAF-S1	Panel Connectors and Trim Covers – 2-Way 120°, Full-Height Connector with Full-Height Cover	344
NLAF-S2	Panel Connectors and Trim Covers – 2-Way 120°, Full-Height Connector with Full-Height Cover	344
NLAF-SN	Panel Connectors and Trim Covers – 2-Way 120°, Full-Height Connector with Full-Height Cover	344
NLA-G1	Panel Connectors and Trim Covers – 3-Way 120°, Full-Height Connector	353
NLA-G3	Panel Connectors and Trim Covers – 3-Way 120°, Full-Height Connector	353
NLA-GN	Panel Connectors and Trim Covers – 3-Way 120°, Full-Height Connector	353
NLAP-G1	Panel Connectors and Trim Covers – 2-Way 120°, Full-Height Connector with Full-Height Cover	344
NLAP-G2	Panel Connectors and Trim Covers – 2-Way 120°, Full-Height Connector with Full-Height Cover	344
NLAP-GN	Panel Connectors and Trim Covers – 2-Way 120°, Full-Height Connector with Full-Height Cover	344
NLAP-S1	Panel Connectors and Trim Covers – 2-Way 120°, Full-Height Connector with Full-Height Cover	344
NLAP-S2	Panel Connectors and Trim Covers – 2-Way 120°, Full-Height Connector with Full-Height Cover	344
NLAP-SN	Panel Connectors and Trim Covers – 2-Way 120°, Full-Height Connector with Full-Height Cover	344
NLA-S1	Panel Connectors and Trim Covers – 3-Way 120°, Full-Height Connector	353
NLA-S3	Panel Connectors and Trim Covers – 3-Way 120°, Full-Height Connector	353
NLA-SN	Panel Connectors and Trim Covers – 3-Way 120°, Full-Height Connector	353
NLEG-A-G	Worksurface Supports – Legs	599
NLEG-D	Worksurface Supports – Freestanding Worksurface Support Leg	601
NLEG-F	Worksurface Supports – Freestanding Worksurface Support Leg	601
NLEG-P	Worksurface Supports – Worksurface Support Leg — Panel Mounted	601
NLEG-S-G	Worksurface Supports – Legs	599
NLRF-G1	Panel Connectors and Trim Covers – End-of-Run, Full-Height Connector with Full-Height Cover	360
NLRF-GN	Panel Connectors and Trim Covers – End-of-Run, Full-Height Connector with Full-Height Cover	360
NLRF-S1	Panel Connectors and Trim Covers – End-of-Run, Full-Height Connector with Full-Height Cover	360
NLRF-SN	Panel Connectors and Trim Covers – End-of-Run, Full-Height Connector with Full-Height Cover	360
NLRF-W1	Panel Connectors and Trim Covers – End-of-Run, Full-Height Connector with Full-Height Cover	360
NLRF-WN	Panel Connectors and Trim Covers – End-of-Run, Full-Height Connector with Full-Height Cover	360
NLRP-G1	Panel Connectors and Trim Covers – End-of-Run, Full-Height Connector with Full-Height Cover	360
NLRP-GN	Panel Connectors and Trim Covers – End-of-Run, Full-Height Connector with Full-Height Cover	360
NLRP-S1	Panel Connectors and Trim Covers – End-of-Run, Full-Height Connector with Full-Height Cover	360
NLRP-SN	Panel Connectors and Trim Covers – End-of-Run, Full-Height Connector with Full-Height Cover	360
NLRP-W1	Panel Connectors and Trim Covers – End-of-Run, Full-Height Connector with Full-Height Cover	360
NLRP-WN	Panel Connectors and Trim Covers – End-of-Run, Full-Height Connector with Full-Height Cover	360
NLRW-G1	Panel Connectors and Trim Covers – End-of-Run, Full-Height Connector with Full-Height Cover	360
NLRW-GN	Panel Connectors and Trim Covers – End-of-Run, Full-Height Connector with Full-Height Cover	360
NLRW-W1	Panel Connectors and Trim Covers – End-of-Run, Full-Height Connector with Full-Height Cover	360
NLRW-WN	Panel Connectors and Trim Covers – End-of-Run, Full-Height Connector with Full-Height Cover	360
NLSS-G1	Panel Connectors and Trim Covers – Straight Full-Height Connector	332
NLSS-GN	Panel Connectors and Trim Covers – Straight Full-Height Connector	332
NLSS-S1	Panel Connectors and Trim Covers – Straight Full-Height Connector	332
NLSS-SN	Panel Connectors and Trim Covers – Straight Full-Height Connector	332
NLVF-G	Panel Connectors and Trim Covers – Variable-Height Covers — Full-Height Cover	375
NLVF-S	Panel Connectors and Trim Covers – Variable-Height Covers — Full-Height Cover	375
NLVF-W	Panel Connectors and Trim Covers – Variable-Height Covers — Full-Height Cover	375
NLVP-G	Panel Connectors and Trim Covers – Variable-Height Covers — Full-Height Cover	375
NLVP-S	Panel Connectors and Trim Covers – Variable-Height Covers — Full-Height Cover	375
NLVP-W	Panel Connectors and Trim Covers – Variable-Height Covers — Full-Height Cover	375
NLVW-G	Panel Connectors and Trim Covers – Variable-Height Covers — Full-Height Cover	375
NLVW-W	Panel Connectors and Trim Covers – Variable-Height Covers — Full-Height Cover	375
NMFF-GA	Foundation Elements — Monolithic Panels – Fabric Surface – Grooved Top Cap	290
NMFF-GN	Foundation Elements — Monolithic Panels – Fabric Surface – Grooved Top Cap	290
NMFF-GP	Foundation Elements — Monolithic Panels – Fabric Surface – Grooved Top Cap	290
NMFF-SA	Foundation Elements — Monolithic Panels – Fabric Surface – Standard or No Top Cap	288

Index

Product Code	Product Description	Page
NMFF-SN	Foundation Elements — Monolithic Panels — Fabric Surface — Standard or No Top Cap	288
NMFF-SP	Foundation Elements — Monolithic Panels — Fabric Surface — Standard or No Top Cap	288
NMFF-WA	Foundation Elements — Monolithic Panels — Fabric Surface — Wood Top Cap	292
NMFF-WN	Foundation Elements — Monolithic Panels — Fabric Surface — Wood Top Cap	292
NMFF-WP	Foundation Elements — Monolithic Panels — Fabric Surface — Wood Top Cap	292
NMG-SA	Foundation Elements — Monolithic Panels — Glazed — Standard or Wood Top Cap	296
NMG-SN	Foundation Elements — Monolithic Panels — Glazed — Standard or Wood Top Cap	296
NMG-SP	Foundation Elements — Monolithic Panels — Glazed — Standard or Wood Top Cap	296
NMG-WN	Foundation Elements — Monolithic Panels — Glazed — Standard or Wood Top Cap	296
NMG-WP	Foundation Elements — Monolithic Panels — Glazed — Standard or Wood Top Cap	296
NNFF	Upper Structure Elements — Floor-to-Ceiling — Floor-to-Ceiling Pads	436
NNFW	Upper Structure Elements — Floor-to-Ceiling — Floor-to-Ceiling Pads	436
NNGG	Upper Structure Elements — Floor-to-Ceiling — Open Frame for Glazing	437
NNWW	Upper Structure Elements — Floor-to-Ceiling — Floor-to-Ceiling Pads	436
NPCA-2	PREMISE 3-Circuit — Electrical Components — Power/Communication Port Kit — for use with Monolithic Panel	469
NPCA-2	PREMISE 4-Circuit (2+2 and 3+1) — Electrical Components — Power/Communication Port Kit — for use with Monolithic Panel	492
NPCA-4	PREMISE 4-Circuit (2+2 and 3+1) — Electrical Components — Power/Communication Port Kit — for use with Monolithic Panel	492
NPCA-B	PREMISE 3-Circuit — Electrical Components — Power/Communication Port Kit — Back-to-Back — for use with Monolithic Panel	470
NPCA-B2	PREMISE 4-Circuit (2+2 and 3+1) — Electrical Components — Power/Communication Port Kit — Back-to-Back — for use with Monolithic Panel	493
NPCA-B4	PREMISE 4-Circuit (2+2 and 3+1) — Electrical Components — Power/Communication Port Kit — Back-to-Back — for use with Monolithic Panel	493
NPCA-BG	PREMISE 3-Circuit — Electrical Components — Power/Communication Port Kit — Back-to-Back — for use with Monolithic Panel	470
NPCA-BG2	PREMISE 4-Circuit (2+2 and 3+1) — Electrical Components — Power/Communication Port Kit — Back-to-Back — for use with Monolithic Panel	493
NPCA-BG4	PREMISE 4-Circuit (2+2 and 3+1) — Electrical Components — Power/Communication Port Kit — Back-to-Back — for use with Monolithic Panel	493
NPCA-G2	PREMISE 4-Circuit (2+2 and 3+1) — Electrical Components — Power/Communication Port Kit — for use with Monolithic Panel	492
NPCA-G4	PREMISE 4-Circuit (2+2 and 3+1) — Electrical Components — Power/Communication Port Kit — for use with Monolithic Panel	492
NQ2F-24	Upper Structure Elements — Floor-to-Ceiling — Floor-to-Ceiling 2-Way Connector with Cover	430
NQ2P-24	Upper Structure Elements — Floor-to-Ceiling — Floor-to-Ceiling 2-Way Connector with Cover	430
NQ2W-24	Upper Structure Elements — Floor-to-Ceiling — Floor-to-Ceiling 2-Way Connector with Cover	430
NQ3F-24	Upper Structure Elements — Floor-to-Ceiling — Floor-to-Ceiling 3-Way Connector with Cover	431
NQ3P-24	Upper Structure Elements — Floor-to-Ceiling — Floor-to-Ceiling 3-Way Connector with Cover	431
NQ3W-24	Upper Structure Elements — Floor-to-Ceiling — Floor-to-Ceiling 3-Way Connector with Cover	431
NQ4S-24	Upper Structure Elements — Floor-to-Ceiling — Floor-to-Ceiling 4-Way Connector with Cover	432
NQEF-24	Upper Structure Elements — Floor-to-Ceiling — Floor-to-Ceiling End-of-Run Connector with Cover	433
NQEP-24	Upper Structure Elements — Floor-to-Ceiling — Floor-to-Ceiling End-of-Run Connector with Cover	433
NQEW-24	Upper Structure Elements — Floor-to-Ceiling — Floor-to-Ceiling End-of-Run Connector with Cover	433
NQRC-10	Upper Structure Elements — Floor-to-Ceiling — Floor-to-Ceiling Track	429
NQS-S	Upper Structure Elements — Floor-to-Ceiling — Floor-to-Ceiling Straight Connector	429
NQSW-40	Upper Structure Elements — Floor-to-Ceiling — Floor-to-Ceiling Wall Mount Kit	435
NQVF-24	Upper Structure Elements — Floor-to-Ceiling — Floor-to-Ceiling Variable-Height Cover	434
NQVP-24	Upper Structure Elements — Floor-to-Ceiling — Floor-to-Ceiling Variable-Height Cover	434
NQVW-24	Upper Structure Elements — Floor-to-Ceiling — Floor-to-Ceiling Variable-Height Cover	434
NRC-NNNN	PREMISE Electrical Components — Raceway Cover without Power/Communications Access	472
NRC-NNNN	PREMISE Electrical Components — Raceway Cover without Power/Communications Access	495
NRC-NNPC	PREMISE Electrical Components — Raceway Cover with Power and Single Gang Communications Access — One Side ..	472
NRC-NNPC	PREMISE Electrical Components — Raceway Cover with Power and Single Gang Communications Access — One Side ..	495

[illegible]

Index

Product Code	Product Description	Page
NS3P-W3	Panel Connectors and Trim Covers – 3-Way 90°, Full-Height Connector with Pre-Configured (Sectional) Cover	350
NS3P-WN	Panel Connectors and Trim Covers – 3-Way 90°, Full-Height Connector with Pre-Configured (Sectional) Cover	350
NS3W-G1	Panel Connectors and Trim Covers – 3-Way 90°, Full-Height Connector with Pre-Configured (Sectional) Cover	350
NS3W-G3	Panel Connectors and Trim Covers – 3-Way 90°, Full-Height Connector with Pre-Configured (Sectional) Cover	350
NS3W-GN	Panel Connectors and Trim Covers – 3-Way 90°, Full-Height Connector with Pre-Configured (Sectional) Cover	350
NS3W-W1	Panel Connectors and Trim Covers – 3-Way 90°, Full-Height Connector with Pre-Configured (Sectional) Cover	350
NS3W-W3	Panel Connectors and Trim Covers – 3-Way 90°, Full-Height Connector with Pre-Configured (Sectional) Cover	350
NS3W-WN	Panel Connectors and Trim Covers – 3-Way 90°, Full-Height Connector with Pre-Configured (Sectional) Cover	350
NSB-1	Panel Connectors and Trim Covers – Heavy Load Stabilizer Bar for Monolithic Panels	372
NSB-2	Panel Connectors and Trim Covers – Heavy Load Stabilizer Bar for Stack Kits	372
NSRF-G1	Panel Connectors and Trim Covers – End-of-Run, Full-Height Connector with Pre-Configured (Sectional) Cover	364
NSRF-GN	Panel Connectors and Trim Covers – End-of-Run, Full-Height Connector with Pre-Configured (Sectional) Cover	364
NSRF-S1	Panel Connectors and Trim Covers – End-of-Run, Full-Height Connector with Pre-Configured (Sectional) Cover	364
NSRF-SN	Panel Connectors and Trim Covers – End-of-Run, Full-Height Connector with Pre-Configured (Sectional) Cover	364
NSRF-W1	Panel Connectors and Trim Covers – End-of-Run, Full-Height Connector with Pre-Configured (Sectional) Cover	364
NSRF-WN	Panel Connectors and Trim Covers – End-of-Run, Full-Height Connector with Pre-Configured (Sectional) Cover	364
NSRP-G1	Panel Connectors and Trim Covers – End-of-Run, Full-Height Connector with Pre-Configured (Sectional) Cover	364
NSRP-GN	Panel Connectors and Trim Covers – End-of-Run, Full-Height Connector with Pre-Configured (Sectional) Cover	364
NSRP-S1	Panel Connectors and Trim Covers – End-of-Run, Full-Height Connector with Pre-Configured (Sectional) Cover	364
NSRP-SN	Panel Connectors and Trim Covers – End-of-Run, Full-Height Connector with Pre-Configured (Sectional) Cover	364
NSRP-W1	Panel Connectors and Trim Covers – End-of-Run, Full-Height Connector with Pre-Configured (Sectional) Cover	364
NSRP-WN	Panel Connectors and Trim Covers – End-of-Run, Full-Height Connector with Pre-Configured (Sectional) Cover	364
NSRW-G1	Panel Connectors and Trim Covers – End-of-Run, Full-Height Connector with Pre-Configured (Sectional) Cover	364
NSRW-GN	Panel Connectors and Trim Covers – End-of-Run, Full-Height Connector with Pre-Configured (Sectional) Cover	364
NSRW-W1	Panel Connectors and Trim Covers – End-of-Run, Full-Height Connector with Pre-Configured (Sectional) Cover	364
NSRW-WN	Panel Connectors and Trim Covers – End-of-Run, Full-Height Connector with Pre-Configured (Sectional) Cover	364
NSVF-G	Panel Connectors and Trim Covers – Variable-Height Covers — Sectional Cover	381
NSVF-S	Panel Connectors and Trim Covers – Variable-Height Covers — Sectional Cover	381
NSVF-W	Panel Connectors and Trim Covers – Variable-Height Covers — Sectional Cover	381
NSVP-G	Panel Connectors and Trim Covers – Variable-Height Covers — Sectional Cover	381
NSVP-S	Panel Connectors and Trim Covers – Variable-Height Covers — Sectional Cover	381
NSVP-W	Panel Connectors and Trim Covers – Variable-Height Covers — Sectional Cover	381
NSVW-G	Panel Connectors and Trim Covers – Variable-Height Covers — Sectional Cover	381
NSVW-W	Panel Connectors and Trim Covers – Variable-Height Covers — Sectional Cover	381
NSWF	Panel Complements – Full Height One-Piece	392
NSWH-2	Panel Complements – Center Mount Hardware	396
NSWL	Panel Complements – Lower Unit	394
NSWS	Panel Complements – Full Height Two-Piece	393
NSWU	Panel Complements – Upper Unit	395
NT-10	Upper Structure Elements — Stack Kits – 10" Stack Kit	397
NT-16	Upper Structure Elements — Stack Kits – 16" Stack Kit	404
NTA-NN	Upper Structure Elements — Stack Components – 10" Single Pad	416
NTA-NN	Upper Structure Elements — Stack Components – 16" Single Pad	422
NTF-EC	Upper Structure Elements — Stack Components – PREMISE — 10" Single Technology Fabric Pad	418
NTF-EC	Upper Structure Elements — Stack Components – PREMISE — 16" Single Technology Fabric Pad	427
NTF-NN	Upper Structure Elements — Stack Components – 10" Single Pad	416
NTF-NN	Upper Structure Elements — Stack Components – 16" Single Pad	422
NTG-16	Upper Structure Elements — Stack Components – Double Pane Pads — 16" Frame with Glazing	425
NTGG	Upper Structure Elements — Stack Kits – 16" Double Pane Glazed Stack Kit	411
NTGL	Panel Connectors and Trim Covers – Grooved Top Cap	373
NTGS	Upper Structure Elements — Stack Kits – 16" Single Pane Glazed Stack Kit	411
NTM-10	Upper Structure Elements — Stack Components – 10" Single Markerboard Pad	419
NTM-16	Upper Structure Elements — Stack Components – 16" Single Markerboard Pad	419

Index

<u>Product Code</u>	<u>Product Description</u>	<u>Page</u>
NTM-32	Upper Structure Elements — Stack Components — 32" Single Markerboard Pad	420
NTO-16	Upper Structure Elements — Stack Components — 16" Open Frame Pads	426
NTOO	Upper Structure Elements — Stack Kits — 16" Open Stack Kit	412
NTP-NN	Upper Structure Elements — Stack Components — 10" Single Pad	416
NTP-NN	Upper Structure Elements — Stack Components — 16" Single Pad	422
NTS	Upper Structure Elements — Stack Components — Single Pane Pads — 16" Frame with Glazing	425
NTSW-NN	Foundation and Upper Structure	
NTW-NN	Upper Structure Elements — Stack Components — 10" Single Pad	416
NTW-NN	Upper Structure Elements — Stack Components — 16" Single Pad	422
NTX	Upper Structure Elements — Stack Components — 10" Translucent Pad	418
NTX	Upper Structure Elements — Stack Components — 16" Translucent Pad	424
NTXX	Upper Structure Elements — Stack Kits — 10" Translucent Stack Kit	403
NTXX	Upper Structure Elements — Stack Kits — 16" Translucent Stack Kit	410
NTY-EC	Upper Structure Elements — Stack Components — PREMISE — 16" Single Technology Slat Pad	428
NTY-NN	Upper Structure Elements — Stack Components — 10" Single Pad	416
NTY-NN	Upper Structure Elements — Stack Components — 16" Single Pad	422
NUB-1	Wall Mount Components — Overhead Storage Unit / Shelf Gang Clip	632
NVST-1	Panel Connectors and Trim Covers — Center Mount Bracket	369
NVST-G	Panel Connectors and Trim Covers — Grooved T-Mount Bracket	369
NVST-G1	Panel Connectors and Trim Covers — T-Mount Kit	368
NVST-G2	Panel Connectors and Trim Covers — T-Mount Kit	368
NVST-GN	Panel Connectors and Trim Covers — T-Mount Kit	368
NVST-S1	Panel Connectors and Trim Covers — T-Mount Kit	368
NVST-S2	Panel Connectors and Trim Covers — T-Mount Kit	368
NVST-SN	Panel Connectors and Trim Covers — T-Mount Kit	368
NVSW-G1	Panel Connectors and Trim Covers — Wall Mount Kit	371
NVSW-GN	Panel Connectors and Trim Covers — Wall Mount Kit	371
NVSW-S1	Panel Connectors and Trim Covers — Wall Mount Kit	371
NVSW-SN	Panel Connectors and Trim Covers — Wall Mount Kit	371
NVSZ-G1	Panel Connectors and Trim Covers — Off-Modular T-Mount Kit	370
NVSZ-G2	Panel Connectors and Trim Covers — Off-Modular T-Mount Kit	370
NVSZ-GN	Panel Connectors and Trim Covers — Off-Modular T-Mount Kit	370
NVSZ-S1	Panel Connectors and Trim Covers — Off-Modular T-Mount Kit	370
NVSZ-S2	Panel Connectors and Trim Covers — Off-Modular T-Mount Kit	370
NVSZ-SN	Panel Connectors and Trim Covers — Off-Modular T-Mount Kit	370
NX2F	Panel Connectors and Trim Covers — 2-Way 90°, Extended Connector with Cover	342
NX2P	Panel Connectors and Trim Covers — 2-Way 90°, Extended Connector with Cover	342
NX2W	Panel Connectors and Trim Covers — 2-Way 90°, Extended Connector with Cover	342
NX3F	Panel Connectors and Trim Covers — 3-Way 90°, Extended Connector with Cover	354
NX3P	Panel Connectors and Trim Covers — 3-Way 90°, Extended Connector with Cover	354
NX3W	Panel Connectors and Trim Covers — 3-Way 90°, Extended Connector with Cover	354
NX4-10	Panel Connectors and Trim Covers — 4-Way 90°, Extended Connector	358
NX4-16	Panel Connectors and Trim Covers — 4-Way 90°, Extended Connector	358
NXRF	Panel Connectors and Trim Covers — Extended Connector with Cover	367
NXRP	Panel Connectors and Trim Covers — Extended Connector with Cover	367
NXRW	Panel Connectors and Trim Covers — Extended Connector with Cover	367
NXSS-10	Panel Connectors and Trim Covers — Straight Extended Connectors	334
NXSS-16	Panel Connectors and Trim Covers — Straight Extended Connectors	334
NXVF	Panel Connectors and Trim Covers — Extended Variable-Height Covers	389
NXVP	Panel Connectors and Trim Covers — Extended Variable-Height Covers	389
NXVW	Panel Connectors and Trim Covers — Extended Variable-Height Covers	389
NZ-16	Upper Structure Elements — Stack Kits — 16" Stack Kit — Structural Cross Bar	413
NZA-32	Foundation Elements — Super Base Panel — Off-Modular Single Pad	328

Index

<u>Product Code</u>	<u>Product Description</u>	<u>Page</u>
NZF-32	Foundation Elements — Super Base Panel — Off-Modular Single Pad	328
NZH-32	Foundation Elements — Super Base Panel — Off-Modular Single Pad	328
NZP-32	Foundation Elements — Super Base Panel — Off-Modular Single Pad	328
NZW-32	Foundation Elements — Super Base Panel — Off-Modular Single Pad	328
NZX-32	Foundation Elements — Super Base Panel — Off-Modular Single Pad	328
PPD-18	Worksurface Accessories — Pencil Drawer	604
SCD-19	Worksurface Accessories — Steel Center Drawer	604
UNFF-QM	Adaptable Upper Storage — Overhead Storage Unit, Standard Mount — Translucent Door	618
UNFF-QZ	Adaptable Upper Storage — Overhead Storage Unit, Standard Off-Modular, Flipper Door	625
UNFS-LM	Adaptable Upper Storage — Overhead Storage Unit, Standard Mount — Laminate Door	620
UNFS-LZ	Adaptable Upper Storage — Overhead Storage Unit, Standard Off-Modular, Flipper Door	625
UNFS-PM	Adaptable Upper Storage — Overhead Storage Unit, Standard Mount — Painted Door	617
UNFS-PZ	Adaptable Upper Storage — Overhead Storage Unit, Standard Off-Modular, Flipper Door	625
UNFS-WM	Adaptable Upper Storage — Overhead Storage Unit, Standard Mount — Wood Door	619
UNFS-WZ	Adaptable Upper Storage — Overhead Storage Unit, Standard Off-Modular, Flipper Door	625
UNGF-QM	Adaptable Upper Storage — Overhead Storage Unit, Up Mount — Translucent Door	622
UNGF-QZ	Adaptable Upper Storage — Overhead Storage Unit, Up Mount Off-Modular, Flipper Door	626
UNGS-LM	Adaptable Upper Storage — Overhead Storage Unit, Up Mount — Laminate Door	624
UNGS-LZ	Adaptable Upper Storage — Overhead Storage Unit, Up Mount Off-Modular, Flipper Door	626
UNGS-PM	Adaptable Upper Storage — Overhead Storage Unit, Up Mount — Painted Door	621
UNGS-PZ	Adaptable Upper Storage — Overhead Storage Unit, Up Mount Off-Modular, Flipper Door	626
UNGS-WM	Adaptable Upper Storage — Overhead Storage Unit, Up Mount — Wood Door	623
UNGS-WZ	Adaptable Upper Storage — Overhead Storage Unit, Up Mount Off-Modular, Flipper Door	626
UNHF-QM	Adaptable Upper Storage — Overhead Storage Unit, Standard Mount — Translucent Door	618
UNHS-LM	Adaptable Upper Storage — Overhead Storage Unit, Standard Mount — Laminate Door	620
UNHS-PM	Adaptable Upper Storage — Overhead Storage Unit, Standard Mount — Painted Door	617
UNHS-WM	Adaptable Upper Storage — Overhead Storage Unit, Standard Mount — Wood Door	619
UNJF-QM	Adaptable Upper Storage — Overhead Storage Unit, Up Mount — Translucent Door	622
UNJS-LM	Adaptable Upper Storage — Overhead Storage Unit, Up Mount — Laminate Door	624
UNJS-PM	Adaptable Upper Storage — Overhead Storage Unit, Up Mount — Painted Door	621
UNJS-WM	Adaptable Upper Storage — Overhead Storage Unit, Up Mount — Wood Door	623
UNKF-QM	Adaptable Upper Storage — Overhead Storage Unit, Standard Mount — Translucent Door	618
UNKS-LM	Adaptable Upper Storage — Overhead Storage Unit, Standard Mount — Laminate Door	620
UNKS-PM	Adaptable Upper Storage — Overhead Storage Unit, Standard Mount — Painted Door	617
UNKS-WM	Adaptable Upper Storage — Overhead Storage Unit, Standard Mount — Wood Door	619
UNLF-QM	Adaptable Upper Storage — Overhead Storage Unit, Up Mount — Translucent Door	622
UNLS-LM	Adaptable Upper Storage — Overhead Storage Unit, Up Mount — Laminate Door	624
UNLS-PM	Adaptable Upper Storage — Overhead Storage Unit, Up Mount — Painted Door	621
UNLS-WM	Adaptable Upper Storage — Overhead Storage Unit, Up Mount — Wood Door	623
UNSN-PM	Adaptable Upper Storage — Shelf	615
UNSN-PM	Adaptable Upper Storage — Up Mount Bracket Shelf	616
UNSY-PM	Adaptable Upper Storage — Straight Mini Shelf	616
UNSZ-PM	Adaptable Upper Storage — Corner Mini Shelf	616
UNTN-PM	Adaptable Upper Storage — Up Mount Shelf	615
UUFb-P	Wall Mount Components — Back for Wall Mounted Overhead Storage Unit	631
UUFF-QW	Wall Mount Components — Overhead Storage Unit, Wall Mount — Translucent Door	628
UUFF-LW	Wall Mount Components — Overhead Storage Unit, Wall Mount — Laminate Door	630
UUFF-PW	Wall Mount Components — Overhead Storage Unit, Wall Mount — Painted Door	627
UUFF-WW	Wall Mount Components — Overhead Storage Unit, Wall Mount — Wood Door	629
UUHF-QW	Wall Mount Components — Overhead Storage Unit, Wall Mount — Translucent Door	628
UUHS-LW	Wall Mount Components — Overhead Storage Unit, Wall Mount — Laminate Door	630
UUHS-PW	Wall Mount Components — Overhead Storage Unit, Wall Mount — Painted Door	627
UUHS-WW	Wall Mount Components — Overhead Storage Unit, Wall Mount — Wood Door	629

Index

<u>Product Code</u>	<u>Product Description</u>	<u>Page</u>
UUKF-QW	Wall Mount Components – Overhead Storage Unit, Wall Mount – Translucent Door	628
UUKS-LW	Wall Mount Components – Overhead Storage Unit, Wall Mount – Laminate Door	630
UUKS-PW	Wall Mount Components – Overhead Storage Unit, Wall Mount – Painted Door	627
UUKS-WW	Wall Mount Components – Overhead Storage Unit, Wall Mount – Wood Door	629
VLRD-0230-5A	V Series Lateral Files — Attached – Two-High — Attached	675
VNAT	Wall Mount Components – Wall Track	632
VNEH-2	PREMISE 4-Circuit (2+2 and 3+1) – Electrical Components – Infeed Harness	482
VNEH-3	PREMISE 3-Circuit – Electrical Components – Infeed Harness	460
VNEH-4	PREMISE 4-Circuit (2+2 and 3+1) – Electrical Components – Infeed Harness	482
VNER-0003	PREMISE 3-Circuit – Electrical Components – Triplex Receptacles – 20 Amp	468
VNZP	Panel Accessories – Filler Post — Sliding Door	298
VPAH-24-5	V Series Attached and Suspended Pedestals – Box/Box/File — Attached	672
VPAJ-24-5	V Series Attached and Suspended Pedestals – File/File — Attached	672
VUZF	Panel Accessories – Sliding Door	298
WQAG	BRAZO – Grommet — For Use with BRAZO Grommet Mounted Light Only	639
WUAC-WSG	Electrical and Communication Accessories – Worksurface Grommet	498
WUAC-WSG	Electrical and Communication Accessories – Worksurface Grommet	501
WUAC-WSG	Worksurface Accessories – Worksurface Grommet	602
WUAR	Worksurface Accessories – Worksurface Reinforcement Channel	603
WUAW	Electrical and Communication Accessories – Horizontal Wire Manager	501
WUAW	Worksurface Accessories – Horizontal Wire Manager	602
WUCA	Adaptable Worksurfaces — Laminate – Corner, 90° Straight Front	523
WUCA-W	Adaptable Worksurfaces — Wood – Corner, 90° Straight Front	567
WUCB-L54	Adaptable Worksurfaces — Laminate – Bent	547
WUCB-R45	Adaptable Worksurfaces — Laminate – Bent	547
WUCB-WL54	Adaptable Worksurfaces — Wood – Bent	588
WUCB-WR45	Adaptable Worksurfaces — Wood – Bent	588
WUCC-0004	Worksurface Supports – Support Column	598
WUCD	Adaptable Worksurfaces — Laminate – D-Shaped Convergent, Wrap-Around	544
WUCD-W	Adaptable Worksurfaces — Wood – D-Shaped Convergent, Wrap-Around	586
WUCE-R44	Adaptable Worksurfaces — Laminate – Corner, 90° Wrap-Around Extended	532
WUCE-WL44	Adaptable Worksurfaces — Wood – Corner, 90° Wrap-Around Extended	576
WUCE-WR44	Adaptable Worksurfaces — Wood – Corner, 90° Wrap-Around Extended	576
WUCF-N34	Adaptable Worksurfaces — Laminate – Corner, 90° Angled Transitional	529
WUCF-N43	Adaptable Worksurfaces — Laminate – Corner, 90° Angled Transitional	529
WUCF-WN34	Adaptable Worksurfaces — Wood – Corner, 90° Angled Transitional	573
WUCF-WN43	Adaptable Worksurfaces — Wood – Corner, 90° Angled Transitional	573
WUCH-N34	Adaptable Worksurfaces — Laminate – Corner, 90° Notched Transitional	528
WUCH-N43	Adaptable Worksurfaces — Laminate – Corner, 90° Notched Transitional	528
WUCH-WN34	Adaptable Worksurfaces — Wood – Corner, 90° Notched Transitional	572
WUCH-WN43	Adaptable Worksurfaces — Wood – Corner, 90° Notched Transitional	572
WUCK	Adaptable Worksurfaces — Laminate – Corner, 90° Split Top	530
WUCK-W	Adaptable Worksurfaces — Wood – Corner, 90° Split Top	574
WUCL-0001	Worksurface Supports – Straight Leg Basic	598
WUCN	Adaptable Worksurfaces — Laminate – Corner, 90° Notched	525
WUCN-W	Adaptable Worksurfaces — Wood – Corner, 90° Notched	569
WUCP-L44	Adaptable Worksurfaces — Laminate – Corner, 90° Notched Extended	534
WUCP-R44	Adaptable Worksurfaces — Laminate – Corner, 90° Notched Extended	534
WUCP-WL44	Adaptable Worksurfaces — Wood – Corner, 90° Notched Extended	578
WUCP-WR44	Adaptable Worksurfaces — Wood – Corner, 90° Notched Extended	578
WUCQ-N44	Adaptable Worksurfaces — Laminate – 90° Merger	539
WUCQ-WN44	Adaptable Worksurfaces — Wood – 90° Merger	582
WUCR	Adaptable Worksurfaces — Laminate – Corner, 90° Wrap-Around	524

Index

Product Code	Product Description	Page
WUCR-W	Adaptable Worksurfaces — Wood — Corner, 90° Wrap-Around	568
WUCT-N34	Adaptable Worksurfaces — Laminate — Corner, 90° Wrap-Around Transitional	527
WUCT-N43	Adaptable Worksurfaces — Laminate — Corner, 90° Wrap-Around Transitional	527
WUCT-WN34	Adaptable Worksurfaces — Wood — Corner, 90° Wrap-Around Transitional	571
WUCT-WN43	Adaptable Worksurfaces — Wood — Corner, 90° Wrap-Around Transitional	571
WUCU	Adaptable Worksurfaces — Laminate — Corner, 90° Angled	526
WUCU-W	Adaptable Worksurfaces — Wood — Corner, 90° Angled	570
WUCX-L43	Adaptable Worksurfaces — Laminate — Corner, 90° Wrap-Around Transitional Extended	536
WUCX-R34	Adaptable Worksurfaces — Laminate — Corner, 90° Wrap-Around Transitional Extended	536
WUCX-WL43	Adaptable Worksurfaces — Wood — Corner, 90° Wrap-Around Transitional Extended	580
WUCX-WR34	Adaptable Worksurfaces — Wood — Corner, 90° Wrap-Around Transitional Extended	580
WUCZ-N44	Adaptable Worksurfaces — Laminate — Corner, 120° Wrap-Around	540
WUCZ-WN44	Adaptable Worksurfaces — Wood — Corner, 120° Wrap-Around	583
WUDC-3930	Adaptable Worksurfaces — Laminate — Conference End	550
WUDC-3930-W	Adaptable Worksurfaces — Wood — Conference End	590
WUDC-5130	Adaptable Worksurfaces — Laminate — Conference End	550
WUDC-5130-W	Adaptable Worksurfaces — Wood — Conference End	590
WUDC-6330	Adaptable Worksurfaces — Laminate — Conference End	550
WUDC-6330-W	Adaptable Worksurfaces — Wood — Conference End	590
WUDD	Adaptable Worksurfaces — Laminate — D-Shaped Ender	546
WUDD-W	Adaptable Worksurfaces — Wood — D-Shaped Ender	587
WUDZ	Adaptable Worksurfaces — Laminate — 120° Link	552
WUDZ-W	Adaptable Worksurfaces — Wood — 120° Link	592
WURA	Adaptable Worksurfaces — Laminate — Rectangular	510
WURA-W	Adaptable Worksurfaces — Wood — Rectangular	554
WURD	Adaptable Worksurfaces — Laminate — D-Shaped Convergent	541
WURD-W	Adaptable Worksurfaces — Wood — D-Shaped Convergent	584
WURE-N34	Adaptable Worksurfaces — Laminate — Wedge	518
WURE-N43	Adaptable Worksurfaces — Laminate — Wedge	518
WURE-WN34	Adaptable Worksurfaces — Wood — Wedge	562
WURE-WN43	Adaptable Worksurfaces — Wood — Wedge	562
WURG-N34	Adaptable Worksurfaces — Laminate — Sharp Wedge	520
WURG-N43	Adaptable Worksurfaces — Laminate — Sharp Wedge	520
WURG-WN34	Adaptable Worksurfaces — Wood — Sharp Wedge	564
WURG-WN43	Adaptable Worksurfaces — Wood — Sharp Wedge	564
WURK	Adaptable Worksurfaces — Laminate — Rectangular — Split Top	522
WURK-W	Adaptable Worksurfaces — Wood — Rectangular — Split Top	566
WURR	Adaptable Worksurfaces — Laminate — Rectangular Radius End	521
WURR-W	Adaptable Worksurfaces — Wood — Rectangular Radius End	565
WURS	Adaptable Worksurfaces — Laminate — Rectangular Swell	514
WURS-W	Adaptable Worksurfaces — Wood — Rectangular Swell	558
WURT-N34	Adaptable Worksurfaces — Laminate — Rectangular Transition	516
WURT-N43	Adaptable Worksurfaces — Laminate — Rectangular Transition	516
WURT-WN34	Adaptable Worksurfaces — Wood — Rectangular Transition	560
WURT-WN43	Adaptable Worksurfaces — Wood — Rectangular Transition	560
WURV	Adaptable Worksurfaces — Laminate — Rectangular Convergent	542
WURV-W	Adaptable Worksurfaces — Wood — Rectangular Convergent	585
WURW	Adaptable Worksurfaces — Laminate — Rectangular Inverse Swell	515
WURW-W	Adaptable Worksurfaces — Wood — Rectangular Inverse Swell	559
WURY	Adaptable Worksurfaces — Laminate — Rectangular Key	513
WURY-3930-L	Adaptable Worksurfaces — Laminate — Key Conference End	551
WURY-3930-W	Adaptable Worksurfaces — Wood — Key Conference End	591
WURY-5130	Adaptable Worksurfaces — Laminate — Key Conference End	551

Index

Product Code	Product Description	Page
WURY-5130-W	Adaptable Worksurfaces — Wood — Key Conference End	591
WURY-5136	Adaptable Worksurfaces — Laminate — Key Conference End	551
WURY-5136-W	Adaptable Worksurfaces — Wood — Key Conference End	591
WURY-6336	Adaptable Worksurfaces — Laminate — Key Conference End	551
WURY-6336-W	Adaptable Worksurfaces — Wood — Key Conference End	591
WURY-6342	Adaptable Worksurfaces — Laminate — Key Conference End	551
WURY-6342-W	Adaptable Worksurfaces — Wood — Key Conference End	591
WURY-6348	Adaptable Worksurfaces — Laminate — Key Conference End	551
WURY-6348-W	Adaptable Worksurfaces — Wood — Key Conference End	591
WURY-W	Adaptable Worksurfaces — Wood — Rectangular Key	557
WUTS	Adaptable Worksurfaces — Laminate — Countertop	548
WUTS-W	Adaptable Worksurfaces — Wood	
ZEBF-0000-P	Adaptable Worksurface Supports — Anti Dislodgement Bracket — Only for use with Worksurface Support Panels	596
ZNBA-0000	Adaptable Worksurface Supports — Side Bracket	594
ZNBA-0000-PLF	Adaptable Worksurface Supports — Side Bracket for use with Knife Edge	595
ZNBA-0000-PRF	Adaptable Worksurface Supports — Side Bracket for use with Knife Edge	595
ZNBD-1000	Adaptable Worksurface Supports — Standard Mini Cantilever Bracket	593
ZNBD-1600	Adaptable Worksurface Supports — Standard Cantilever Bracket	593
ZNBH-1000	Adaptable Worksurface Supports — Shared Mini Cantilever Bracket	594
ZNBH-1600	Adaptable Worksurface Supports — Standard Shared Cantilever Bracket	593
ZNBN-0000	Adaptable Worksurface Supports — Pedestal-to-Panel Bracket	596
ZNBO	Adaptable Worksurface Supports — Off-Modular Worksurface Bracket	594
ZNBR-0000	Adaptable Worksurface Supports — Rear-Corner Bracket	595
ZNBT-PNE	Adaptable Worksurface Supports — Countertop Bracket	595
ZNBT-PNS	Adaptable Worksurface Supports — Countertop Bracket	595
ZNFS-LNE	Worksurface Supports	
ZNFS-WNE	Worksurface Supports	
ZUBF-0000	Adaptable Worksurface Supports — Flush Mount Plate	595
ZUBW-PN	Accessories — Worksurface to Wall Bracket	631
ZUFJ	Worksurface Supports — Single Support Leg	599
ZZFJ	Worksurface Supports — Support Post	600
ZZFK	Worksurface Supports — Double Support Leg	599
ZZFZ	Worksurface Supports — Adjustable Height Disc Base	598

PRODUCT NON-OBSOLESCENCE AND WARRANTY POLICY

This North American Haworth Product Non-Obsolescence and Warranty Policy (the “policy”) applies to products manufactured after May 8, 2015. For products manufactured before this date please refer to the policy published in the NA Price List when purchased or contact your local Authorized Haworth Dealer. All Haworth products are warranted for 24 hour / 7 day use over the length of the Applicable Warranty Period as set forth below.

Haworth, Inc. or Haworth, Ltd., (each called “Haworth”) will make a good faith effort to maintain product compatibility within our various generations of integrated product platforms to provide our customers with spaces that adapt to change. Under our non-obsolence policy, we commit to provide our customers with products of comparable function or operational characteristics for a term equal to the Applicable Warranty Period. Haworth fabrics and finishes must be updated periodically to maintain the market appeal of our products and respond to the demands and changing preferences of our customers. As a result, we or the manufacturer may discontinue some fabrics and finishes before expiration of the Applicable Warranty Period.

If a new product purchased or leased from Haworth or from an Authorized Haworth Dealer proves to be defective (as defined below) while the product is still in the possession of the initial purchaser or lessee and if they, within the Applicable Warranty Period, inform Haworth of the defect by contacting the local Authorized Haworth Dealer, then, except as provided below, Haworth will, at Haworth's option, either repair or replace the product, at Haworth's expense, or refund the purchase price of the product. Except as provided below, a product shall be considered “defective” if Haworth finds that it is defective in material or workmanship and if the defect materially impairs the use of the product to the purchaser or lessee. The applicable warranty period begins on the day the product is manufactured. If a product that the purchaser or lessee references in a notice of defect was not installed by a Haworth Certified installer and/or reconfigured by a Haworth-trained installer, then the product may not be considered defective and Haworth will not be obligated to repair or replace it or to refund its price.

PRODUCTS / APPLICABLE WARRANTY PERIOD

LIFETIME

All Haworth products are warranted for lifetime *except products, components and materials described below:*

TWELVE YEARS

All Haworth NA manufactured seating is warranted for 24/7 multiple shift use by persons up to 325 lbs and includes the framework, mechanisms, seating foam, seat & back mesh and seating glides & casters.

All wood or wood framed products.

TEN YEARS

All wall products (excluding soft close door mechanisms warranted for Two Years), electrical components (excluding Power Base™ AI, USB receptacles and workware products), electrical accessories, fixed task lighting (excluding LED lighting), adjustable keyboard pads, monitor arms and products that are at any time used in a classroom or educational environment (other than administration areas) *except as limited or described below:*

FIVE YEARS

Fabric scrims and fabrics rated Heavy Duty (A) under the Association of Contract Textiles Guidelines, leather, vertical use markerboard laminates, user-adjustable worksurface mechanisms, gel arm caps, thermofused laminates, slow close mechanisms, LED lighting, Power Base™ receptacles with USB charging outlets, electronic ballasts used in task lighting, horizontal glass or thermoplastic table assemblies and Systems Accessories.

THREE YEARS

Power Base AI Electrical products, workware™ products, Hoop products (excludes any warranty for surface damage such as scratches, dents or abrasions), plastic ultraviolet light color fastness and fabrics rated General Contract (a) under the Association of Contract Textiles Guidelines.

ONE TO FIVE YEARS*

Products that are manufactured outside North America and sold into the North American market.

ONE YEAR

Horizontal use markerboard laminate, Openest™ Plume Screens, soft palm rest, mouse pad insert and translucent edging.

Haworth “Specials” products that involve simple modification of a standard based product will be warranted for the same period as the standard catalog product it is based on. Haworth “Specials” products that deviate from standard catalog product in the form of features, construction, function, or aesthetic will be warranted for 1 year.

All software is without warranty of any kind, either expressed or implied.


All service parts are warranted for two years or the remaining balance of the assembly's original warranty period, whichever is longer.

*The Applicable Warranty Period for each such product is specified in Haworth's price list for the product.

A product will not be considered to be defective, and Haworth will not repair, or replace it or refund its price if the product (1) is a consumable product, such as a lamp; (2) is “Customer's Own Material” (i.e. material specified by the purchaser or lessee that is not a standard Haworth product offering, such as Haworth Alliance fabrics); (3) is not installed and used as recommended in Haworth's written specification, installation, care, maintenance and user guides; (4) has been otherwise misused or suffered abusive damage or (5) is a product that is manufactured by a third-party supplier from whom Haworth purchases it for resale without incorporating it into Haworth product (in which case Haworth will assign to the purchaser or lessee any warranty that the manufacturer provides), unless otherwise specified by Haworth in writing. At all times the Covered Product must have been located in a building that is (i) dry, fully closed-in and protected from the natural elements, and (ii) adequately heated, ventilated and air conditioned in order to maintain an internal temperature between 40°F and 90°F (4°C and 32°C) and relative humidity levels between 25% and 55%.

A defect in material or workmanship does not include damage to a product, or failure of a product to operate or perform properly or to maintain appearance, caused by (a) normal wear and tear; (b) an Act of God or transportation; (c) a product alteration made without Haworth's express written authorization; (d) the natural variation of color, grain or texture found in wood and leather; (e) the natural aging found in materials such as wood, fabric and leather which results in colors shifting during use; (f) dye lot variations in fabric, leather or wall covering (g) the natural patina of leather during use; (h) “puddling” of leather or faux leather; or (i) reverse crocking of dyes from clothing onto our seating materials.

EXCEPT AS STATED ABOVE, HAWORTH DOES NOT MAKE A WARRANTY AS TO ANY PRODUCT AND, IN PARTICULAR, DOES NOT MAKE A WARRANTY OF MERCHANTABILITY OR OF FITNESS FOR A PARTICULAR PURPOSE. Product repair or replacement or refund of the price, at Haworth's option, in accordance with this Policy, is the purchaser's or lessee's exclusive remedy for a product defect. Haworth shall not have tort liability with respect to a product, and Haworth shall not be liable for any consequential, economic, indirect, special, punitive or incidental damages arising from a product defect. Haworth shall not be liable for repair or product placement due to improper installation or any defect in materials used for installation which are not manufactured, sold or supplied by Haworth.



HAWORTH®

For more information call 800.344.2600 or 616.393.3000.


Haworth is a registered trademark of Haworth, Inc.
©Haworth, Inc. 2015 6.15 Item #0013

haworth.com | haworth-europe.com | haworth-asia.com

PREMISE 3-Circuit – Electrical Components

Receptacle with USB Charging Outlet

15 Amp Duplex Receptacle with USB Charging Outlet



EUER-0015-3M13U



Description	Circuit Access	Ground Type	Number	Price
15A	Circuit 1	Common	EUER-0015-3M13U	\$480.00

Features

- Includes box of six receptacles, each receptacle has two 15 Amp outlets (NEMA 5-15R configuration) and two USB charging outlets.
- For use with panels equipped with 3-circuit power components.
- Receptacles are common ground only.
- USB 2 Amp shared; 5VDC.

To Order, Specify:

- 1) Product number.
- 2) Non-metallic trim color.


Specification Tips

- **Receptacles have fixed circuit access to circuit one only and are not field programmable.**
- For power access at any location within the panels with appropriate base raceway covers or technology pad.
- Not for use with power sources other than 120 volt 60 hertz.
- Do not mix 3-circuit and 6-circuit with 4-circuit components. Do not mix 2+2 and 3+1 components. Components have unique polarity key and color coding (3-circuit=black, 6-circuit=ivory, 2+2=blue and 3+1=green).

PREMISE 4-Circuit (2+2 and 3+1) – Electrical Components

Receptacle with USB Charging Outlet

15 Amp Duplex Receptacle
with USB Charging Outlet —
4-Circuit (2+2 and 3+1)



Description	Circuit Access	Receptacle Identifier	Ground Type	Number	Price
2+2 15A	Circuit 1	1	Common	EUER-0015-2M13U	\$480.00
3+1 15A	Circuit 1	A	Common	EUER-0015-4M13U	\$480.00

Features

- Includes box of six receptacles, each receptacle has two 15 Amp outlets (NEMA 5-15R configuration) and two USB charging outlets.
- For use with panels equipped with 4-circuit (2+2 or 3+1) power components.
- Receptacles are common ground only.
- USB 2 Amp shared; 5VDC.

To Order, Specify:

- 1) Product number.
- 2) Non-metallic trim color.

Specification Tips

- Receptacles have fixed circuit access to circuit one only and are not field programmable.
- For power access at any location within the panels with appropriate base raceway covers or technology pad.
- Not for use with power sources other than 120 volt 60 hertz.
- Do not mix 3-circuit and 6-circuit with 4-circuit components. Do not mix 2+2 and 3+1 components. Components have unique polarity key and color coding (3-circuit=black, 6-circuit=ivory, 2+2=blue and 3+1=green).


NOTE: 3+1 receptacles identify circuit access with letters (i.e. Circuit 1=A).

Enhanced Power Module

Corded

3-Port:


- (2) Power
- (1) USB



EUD1-PF0B-2010

4-Port:


- (2) Power
- (1) USB
- (1) Data



EUD1-PF0B-2110

6-Port:


- (2) Power
- (1) USB
- (1) Data
- (1) Cable Bay



EUD1-PF0B-2112

4-Port:

- (4) Power



NOTE:

Always Fused Plug
when more than 3
power outlets specified.

EUD1-PF0B-4000



Features

- Includes power module with 3, 4 or 6 ports that can be configured with simplex outlets (NEMA-5-15R), USB charging simplex (with two USB outlets), data jack adapters or cable bay(s) that can accept up to 2 pull out data/AV cables.
- Data jack adapters accommodate most varieties of field supplied data jacks or separately specified AV cables.
- Attaches to surface with use of separately specified mounting brackets.
- Corded power module available with 15 amp - 6'(1829mm) or 12'(3658mm) long cord with plug (NEMA 5-15P).
- USB Charging simplex consists of 2 USB outlets. 1,000mA of charging power per USB outlet.
- Color option of black anodized housing with black receptacles or clear anodized housing with white receptacles.

Specification Tips

- Separately specify attachment hardware for desired application.
- For use with 120 volt 60 hertz power source only.
- Requires field installation.
- Specify AV cables separately.
- Cable Bay requires cables less than 0.3"(7.6mm) diameter.
- Configuration and quantity of power and data ports cannot be modified in the field.
- Application may require approval of local authority having jurisdiction (AHJ); ensure compliance before placing orders and installation.

To Order, Specify:

- 1) Product number.
(No finish specification required.)

Enhanced Power Module

Corded

Top Width	Top Depth	Cord Length	Housing Color	Port Color	Port	Configuration	Number	Price
5" (127mm)	3" (76mm)	6' (1829mm)	Black Anodized	Black	3	1 Power Receptacle, 1 Cable Bay	EUD1-PF0B-1002	\$483.53
						1 Power Receptacle, 2 Data Ports	EUD1-PF0B-1020	483.53
						1 Power Receptacle, 1 Data Port, 1 USB Charging	EUD1-PF0B-1110	543.53
						1 Power Receptacle, 2 USB Charging	EUD1-PF0B-1200	603.53
						2 Power Receptacles, 1 Data Port	EUD1-PF0B-2010	483.53
						2 Power Receptacles, 1 USB Charging	EUD1-PF0B-2100	543.53
6 1/2" (165mm)	3" (76mm)				4	3 Power Receptacles	EUD1-PF0B-3000	483.53
						1 Power Receptacle, 1 Data Port, 1 Cable Bay	EUD1-PF0B-1012	\$483.53
						1 Power Receptacle, 3 Data Ports	EUD1-PF0B-1030	483.53
						1 Power Receptacle, 1 USB Charging, 1 Cable Bay	EUD1-PF0B-1102	543.53
						1 Power Receptacle, 3 USB Charging	EUD1-PF0B-1300	663.53
						2 Power Receptacles, 1 Cable Bay	EUD1-PF0B-2002	483.53
						2 Power Receptacles, 2 Data Ports	EUD1-PF0B-2020	483.53
						2 Power Receptacles, 1 USB Charging, 1 Data Port	EUD1-PF0B-2110	543.53
						2 Power Receptacles, 2 USB Charging	EUD1-PF0B-2200	603.53
						3 Power Receptacles, 1 Data Port	EUD1-PF0B-3010	483.53
9 1/2" (241mm)	3" (76mm)				6	3 Power Receptacles, 1 USB Charging	EUD1-PF0B-3100	543.53
						4 Power Receptacles	EUD1-PF0B-4000	483.53
						1 Power Receptacle, 1 USB Charging, 2 Cable Bays	EUD1-PF0B-1104	\$595.53
						1 Power Receptacle, 1 USB Charging, 2 Data Ports, 1 Cable Bay	EUD1-PF0B-1122	595.53
						1 Power Receptacle, 1 USB Charging, 4 Data Ports	EUD1-PF0B-1140	595.53
						1 Power Receptacle, 2 USB Charging, 1 Data Port, 1 Cable Bay	EUD1-PF0B-1212	655.53
						1 Power Receptacle, 2 USB Charging, 3 Data Ports	EUD1-PF0B-1230	655.53
						1 Power Receptacle, 3 USB Charging, 1 Cable Bay	EUD1-PF0B-1302	715.53
						1 Power Receptacle, 3 USB Charging, 2 Data Ports	EUD1-PF0B-1320	715.53
						1 Power Receptacle, 4 USB Charging, 1 Data Port	EUD1-PF0B-1410	775.53
						2 Power Receptacles, 2 Cable Bays	EUD1-PF0B-2004	535.53
						2 Power Receptacles, 2 Data Ports, 1 Cable Bay	EUD1-PF0B-2022	535.53
						2 Power Receptacles, 4 Data Ports	EUD1-PF0B-2040	535.53
						2 Power Receptacles, 1 USB Charging, 1 Data Port, 1 Cable Bay	EUD1-PF0B-2112	595.53
						2 Power Receptacles, 1 USB Charging, 3 Data Ports	EUD1-PF0B-2130	595.53
						2 Power Receptacles, 2 USB Charging, 1 Cable Bay	EUD1-PF0B-2202	655.53
						2 Power Receptacles, 2 USB Charging, 2 Data Ports	EUD1-PF0B-2220	655.53
						2 Power Receptacles, 3 USB Charging, 1 Data Port	EUD1-PF0B-2310	715.53
						2 Power Receptacles, 4 USB Charging	EUD1-PF0B-2400	775.53
						3 Power Receptacles, 3 Data Ports	EUD1-PF0B-3030	535.53
						3 Power Receptacles, 1 USB Charging, 1 Cable Bay	EUD1-PF0B-3102	595.53
						3 Power Receptacles, 1 USB Charging, 2 Data Ports	EUD1-PF0B-3120	595.53
						3 Power Receptacles, 2 USB Charging, 1 Data Port	EUD1-PF0B-3210	655.53
						3 Power Receptacles, 3 USB Charging	EUD1-PF0B-3300	715.53
						4 Power Receptacles, 1 Cable Bay	EUD1-PF0B-4002	535.53
						4 Power Receptacles, 2 Data Ports	EUD1-PF0B-4020	535.53
						4 Power Receptacles, 1 USB Charging, 1 Data Port	EUD1-PF0B-4110	595.53
						4 Power Receptacles, 2 USB Charging	EUD1-PF0B-4200	655.53
						5 Power Receptacles, 1 Data Port	EUD1-PF0B-5010	535.53
						5 Power Receptacles, 1 USB Charging	EUD1-PF0B-5100	595.53
						6 Power Receptacles	EUD1-PF0B-6000	535.53

Enhanced Power Module

Corded

Top Width	Top Depth	Cord Length	Housing Color	Port Color	Port	Configuration	Number	Price
9 1/2" (241mm)	3" (76mm)	6' (1829mm)	Clear Anodized	White	3	1 Power Receptacle, 1 Cable Bay	EUD1-PF0W-1002	\$379.53
						1 Power Receptacle, 2 Data Ports	EUD1-PF0W-1020	\$379.53
						1 Power Receptacle, 1 Data Port, 1 USB Charging	EUD1-PF0W-1110	\$439.53
						1 Power Receptacle, 2 USB Charging	EUD1-PF0W-1200	\$499.53
						2 Power Receptacles, 1 Data Port	EUD1-PF0W-2010	\$379.53
						2 Power Receptacles, 1 USB Charging	EUD1-PF0W-2100	\$439.53
						3 Power Receptacles	EUD1-PF0W-3000	\$379.53
					4	1 Power Receptacle, 1 Data Port, 1 Cable Bay	EUD1-PF0W-1012	\$379.53
						1 Power Receptacle, 3 Data Ports	EUD1-PF0W-1030	\$379.53
						1 Power Receptacle, 1 USB Charging, 1 Cable Bay	EUD1-PF0W-1102	\$439.53
						1 Power Receptacle, 3 USB Charging	EUD1-PF0W-1300	\$559.53
						2 Power Receptacles, 1 Cable Bay	EUD1-PF0W-2002	\$379.53
						2 Power Receptacles, 2 Data Ports	EUD1-PF0W-2020	\$379.53
						2 Power Receptacles, 1 USB Charging, 1 Data Port	EUD1-PF0W-2110	\$439.53
						2 Power Receptacles, 2 USB Charging	EUD1-PF0W-2200	\$499.53
						3 Power Receptacles, 1 Data Port	EUD1-PF0W-3010	\$379.53
						3 Power Receptacles, 1 USB Charging	EUD1-PF0W-3100	\$439.53
						4 Power Receptacles	EUD1-PF0W-4000	\$379.53
					6	1 Power Receptacle, 1 USB Charging, 2 Cable Bays	EUD1-PF0W-1104	\$491.53
						1 Power Receptacle, 1 USB Charging, 2 Data Ports, 1 Cable Bay	EUD1-PF0W-1122	\$491.53
						1 Power Receptacle, 1 USB Charging, 4 Data Ports	EUD1-PF0W-1140	\$491.53
						1 Power Receptacle, 2 USB Charging, 1 Data Port, 1 Cable Bay	EUD1-PF0W-1212	\$551.53
						1 Power Receptacle, 2 USB Charging, 3 Data Ports	EUD1-PF0W-1230	\$551.53
						1 Power Receptacle, 3 USB Charging, 1 Cable Bay	EUD1-PF0W-1302	\$611.53
						1 Power Receptacle, 3 USB Charging, 2 Data Ports	EUD1-PF0W-1320	\$611.53
						1 Power Receptacle, 4 USB Charging, 1 Data Port	EUD1-PF0W-1410	\$671.53
						2 Power Receptacles, 2 Cable Bays	EUD1-PF0W-2004	\$431.53
						2 Power Receptacles, 2 Data Ports, 1 Cable Bay	EUD1-PF0W-2022	\$431.53
						2 Power Receptacles, 4 Data Ports	EUD1-PF0W-2040	\$431.53
						2 Power Receptacles, 1 USB Charging, 1 Data Port, 1 Cable Bay	EUD1-PF0W-2112	\$491.53
						2 Power Receptacles, 1 USB Charging, 3 Data Ports	EUD1-PF0W-2130	\$491.53
						2 Power Receptacles, 2 USB Charging, 1 Cable Bay	EUD1-PF0W-2202	\$551.53
						2 Power Receptacles, 2 USB Charging, 2 Data Ports	EUD1-PF0W-2220	\$551.53
						2 Power Receptacles, 3 USB Charging, 1 Data Port	EUD1-PF0W-2310	\$611.53
						2 Power Receptacles, 4 USB Charging	EUD1-PF0W-2400	\$671.53
						3 Power Receptacles, 3 Data Ports	EUD1-PF0W-3030	\$431.53
						3 Power Receptacles, 1 USB Charging, 1 Cable Bay	EUD1-PF0W-3102	\$491.53
						3 Power Receptacles, 1 USB Charging, 2 Data Ports	EUD1-PF0W-3120	\$491.53
						3 Power Receptacles, 2 USB Charging, 1 Data Port	EUD1-PF0W-3210	\$551.53
						3 Power Receptacles, 3 USB Charging	EUD1-PF0W-3300	\$611.53
						4 Power Receptacles, 1 Cable Bay	EUD1-PF0W-4002	\$431.53
						4 Power Receptacles, 2 Data Ports	EUD1-PF0W-4020	\$431.53
						4 Power Receptacles, 1 USB Charging, 1 Data Port	EUD1-PF0W-4110	\$491.53
						4 Power Receptacles, 2 USB Charging	EUD1-PF0W-4200	\$551.53
						5 Power Receptacles, 1 Data Port	EUD1-PF0W-5010	\$431.53
						5 Power Receptacles, 1 USB Charging	EUD1-PF0W-5100	\$491.53
						6 Power Receptacles	EUD1-PF0W-6000	\$431.53

Enhanced Power Module

Corded

Top Width	Top Depth	Cord Length	Housing Color	Port Color	Port	Configuration	Number	Price
9 1/2" (241mm)	3" (76mm)	12' (3658mm)	Black Anodized	Black	3	1 Power Receptacle, 1 Cable Bay	EUD1-PL0B-1002	\$532.41
						1 Power Receptacle, 2 Data Ports	EUD1-PL0B-1020	\$532.41
						1 Power Receptacle, 1 Data Port, 1 USB Charging	EUD1-PL0B-1110	\$592.41
						1 Power Receptacle, 2 USB Charging	EUD1-PL0B-1200	\$652.41
						2 Power Receptacles, 1 Data Port	EUD1-PL0B-2010	\$532.41
						2 Power Receptacles, 1 USB Charging	EUD1-PL0B-2100	\$592.41
					4	3 Power Receptacles	EUD1-PL0B-3000	\$532.41
						1 Power Receptacle, 1 Data Port, 1 Cable Bay	EUD1-PL0B-1012	\$532.41
						1 Power Receptacle, 3 Data Ports	EUD1-PL0B-1030	\$532.41
						1 Power Receptacle, 1 USB Charging, 1 Cable Bay	EUD1-PL0B-1102	\$592.41
						1 Power Receptacle, 3 USB Charging	EUD1-PL0B-1300	\$712.41
						2 Power Receptacles, 1 Cable Bay	EUD1-PL0B-2002	\$532.41
						2 Power Receptacles, 2 Data Ports	EUD1-PL0B-2020	\$532.41
						2 Power Receptacles, 1 USB Charging, 1 Data Port	EUD1-PL0B-2110	\$592.41
						2 Power Receptacles, 2 USB Charging	EUD1-PL0B-2200	\$652.41
						3 Power Receptacles, 1 Data Port	EUD1-PL0B-3010	\$532.41
						3 Power Receptacles, 1 USB Charging	EUD1-PL0B-3100	\$592.41
						4 Power Receptacles	EUD1-PL0B-4000	\$532.41
					6	1 Power Receptacle, 1 USB Charging, 2 Cable Bays	EUD1-PL0B-1104	\$644.41
						1 Power Receptacle, 1 USB Charging, 2 Data Ports, 1 Cable Bay	EUD1-PL0B-1122	\$644.41
						1 Power Receptacle, 1 USB Charging, 4 Data Ports	EUD1-PL0B-1140	\$644.41
						1 Power Receptacle, 2 USB Charging, 1 Data Port, 1 Cable Bay	EUD1-PL0B-1212	\$704.41
						1 Power Receptacle, 2 USB Charging, 3 Data Ports	EUD1-PL0B-1230	\$704.41
						1 Power Receptacle, 3 USB Charging, 1 Cable Bay	EUD1-PL0B-1302	\$764.41
						1 Power Receptacle, 3 USB Charging, 2 Data Ports	EUD1-PL0B-1320	\$764.41
						1 Power Receptacle, 4 USB Charging, 1 Data Port	EUD1-PL0B-1410	\$824.41
						2 Power Receptacles, 2 Cable Bays	EUD1-PL0B-2004	\$584.41
						2 Power Receptacles, 2 Data Ports, 1 Cable Bay	EUD1-PL0B-2022	\$584.41
						2 Power Receptacles, 4 Data Ports	EUD1-PL0B-2040	\$584.41
						2 Power Receptacles, 1 USB Charging, 1 Data Port, 1 Cable Bay	EUD1-PL0B-2112	\$644.41
						2 Power Receptacles, 1 USB Charging, 3 Data Ports	EUD1-PL0B-2130	\$644.41
						2 Power Receptacles, 2 USB Charging, 1 Cable Bay	EUD1-PL0B-2202	\$704.41
						2 Power Receptacles, 2 USB Charging, 2 Data Ports	EUD1-PL0B-2220	\$704.41
						2 Power Receptacles, 3 USB Charging, 1 Data Port	EUD1-PL0B-2310	\$764.41
						2 Power Receptacles, 4 USB Charging	EUD1-PL0B-2400	\$824.41
						3 Power Receptacles, 3 Data Ports	EUD1-PL0B-3030	\$584.41
						3 Power Receptacles, 1 USB Charging, 1 Cable Bay	EUD1-PL0B-3102	\$644.41
						3 Power Receptacles, 1 USB Charging, 2 Data Ports	EUD1-PL0B-3120	\$644.41
						3 Power Receptacles, 2 USB Charging, 1 Data Port	EUD1-PL0B-3210	\$704.41
						3 Power Receptacles, 3 USB Charging	EUD1-PL0B-3300	\$764.41
						4 Power Receptacles, 1 Cable Bay	EUD1-PL0B-4002	\$584.41
						4 Power Receptacles, 2 Data Ports	EUD1-PL0B-4020	\$584.41
						4 Power Receptacles, 1 USB Charging, 1 Data Port	EUD1-PL0B-4110	\$644.41
						4 Power Receptacles, 2 USB Charging	EUD1-PL0B-4200	\$704.41
						5 Power Receptacles, 1 Data Port	EUD1-PL0B-5010	\$584.41
						5 Power Receptacles, 1 USB Charging	EUD1-PL0B-5100	\$644.41
						6 Power Receptacles	EUD1-PL0B-6000	\$584.41

Enhanced Power Module

Corded

Top Width	Top Depth	Cord Length	Housing Color	Port Color	Port	Configuration	Number	Price
9 1/2" (241mm)	3" (76mm)	12' (3658mm)	Clear Anodized	White	3	1 Power Receptacle, 1 Cable Bay	EUD1-PL0W-1002	\$428.41
						1 Power Receptacle, 2 Data Ports	EUD1-PL0W-1020	428.41
						1 Power Receptacle, 1 Data Port, 1 USB Charging	EUD1-PL0W-1110	488.41
						1 Power Receptacle, 2 USB Charging	EUD1-PL0W-1200	548.41
						2 Power Receptacles, 1 Data Port	EUD1-PL0W-2010	428.41
						2 Power Receptacles, 1 USB Charging	EUD1-PL0W-2100	488.41
						3 Power Receptacles	EUD1-PL0W-3000	428.41
					4	1 Power Receptacle, 1 Data Port, 1 Cable Bay	EUD1-PL0W-1012	\$428.41
						1 Power Receptacle, 3 Data Ports	EUD1-PL0W-1030	428.41
						1 Power Receptacle, 1 USB Charging, 1 Cable Bay	EUD1-PL0W-1102	488.41
						1 Power Receptacle, 3 USB Charging	EUD1-PL0W-1300	608.41
						2 Power Receptacles, 1 Cable Bay	EUD1-PL0W-2002	428.41
						2 Power Receptacles, 2 Data Ports	EUD1-PL0W-2020	428.41
						2 Power Receptacles, 1 USB Charging, 1 Data Port	EUD1-PL0W-2110	488.41
						2 Power Receptacles, 2 USB Charging	EUD1-PL0W-2200	548.41
						3 Power Receptacles, 1 Data Port	EUD1-PL0W-3010	428.41
						3 Power Receptacles, 1 USB Charging	EUD1-PL0W-3100	488.41
						4 Power Receptacles	EUD1-PL0W-4000	428.41
					6	1 Power Receptacle, 1 USB Charging, 2 Cable Bays	EUD1-PL0W-1104	\$540.41
						1 Power Receptacle, 1 USB Charging, 2 Data Ports, 1 Cable Bay	EUD1-PL0W-1122	540.41
						1 Power Receptacle, 1 USB Charging, 4 Data Ports	EUD1-PL0W-1140	540.41
						1 Power Receptacle, 2 USB Charging, 1 Data Port, 1 Cable Bay	EUD1-PL0W-1212	600.41
						1 Power Receptacle, 2 USB Charging, 3 Data Ports	EUD1-PL0W-1230	600.41
						1 Power Receptacle, 3 USB Charging, 1 Cable Bay	EUD1-PL0W-1302	660.41
						1 Power Receptacle, 3 USB Charging, 2 Data Ports	EUD1-PL0W-1320	660.41
						1 Power Receptacle, 4 USB Charging, 1 Data Port	EUD1-PL0W-1410	720.41
						2 Power Receptacles, 2 Cable Bays	EUD1-PL0W-2004	480.41
						2 Power Receptacles, 2 Data Ports, 1 Cable Bay	EUD1-PL0W-2022	480.41
						2 Power Receptacles, 4 Data Ports	EUD1-PL0W-2040	480.41
						2 Power Receptacles, 1 USB Charging, 1 Data Port, 1 Cable Bay	EUD1-PL0W-2112	540.41
						2 Power Receptacles, 1 USB Charging, 3 Data Ports	EUD1-PL0W-2130	540.41
						2 Power Receptacles, 2 USB Charging, 1 Cable Bay	EUD1-PL0W-2202	600.41
						2 Power Receptacles, 2 USB Charging, 2 Data Ports	EUD1-PL0W-2220	600.41
						2 Power Receptacles, 3 USB Charging, 1 Data Port	EUD1-PL0W-2310	660.41
						2 Power Receptacles, 4 USB Charging	EUD1-PL0W-2400	720.41
						3 Power Receptacles, 3 Data Ports	EUD1-PL0W-3030	480.41
						3 Power Receptacles, 1 USB Charging, 1 Cable Bay	EUD1-PL0W-3102	540.41
						3 Power Receptacles, 1 USB Charging, 2 Data Ports	EUD1-PL0W-3120	540.41
						3 Power Receptacles, 2 USB Charging, 1 Data Port	EUD1-PL0W-3210	600.41
						3 Power Receptacles, 3 USB Charging	EUD1-PL0W-3300	660.41
						4 Power Receptacles, 1 Cable Bay	EUD1-PL0W-4002	480.41
						4 Power Receptacles, 2 Data Ports	EUD1-PL0W-4020	480.41
						4 Power Receptacles, 1 USB Charging, 1 Data Port	EUD1-PL0W-4110	540.41
						4 Power Receptacles, 2 USB Charging	EUD1-PL0W-4200	600.41
						5 Power Receptacles, 1 Data Port	EUD1-PL0W-5010	480.41
						5 Power Receptacles, 1 USB Charging	EUD1-PL0W-5100	540.41
						6 Power Receptacles	EUD1-PL0W-6000	480.41


This page intentionally blank

Enhanced Power Module

Hardwire

3-Port:


(2) Power
(1) USB



EUD1-HF0B-2010

4-Port:


(2) Power
(1) USB
(1) Data



EUD1-HF0B-2110

6-Port:

(2) Power
(1) USB
(1) Data
(1) Cable Bay



EUD1-HF0B-2112



Features

- Includes power module with 3, 4 or 6 ports that can be configured with simplex outlets (NEMA-5-15R), USB charging simplex (with two USB outlets), data jack adapters or cable bay(s) that can accept up to 2 pull out data/AV cables.
- Data jack adapters accommodate most varieties of field supplied data jacks or separately specified AV cables.
- Attaches to surface with use of separately specified mounting brackets.
- Hardwired power module with 6'(1829mm) or 12'(3658mm) long flexible metal conduit feed, 1/2"(13mm) conduit fitting and wires for hardwire connection.
- USB Charging simplex consists of 2 USB outlets. 1,000mA of charging power per USB outlet.
- Color option of black anodized housing with black receptacles or clear anodized housing with white receptacles.

Specification Tips

- Separately specify attachment hardware for desired application.
- For use with 120 volt 60 hertz power source only.
- Requires field installation.
- Specify AV cables separately.
- Cable Bay requires cables less than 0.3"(7.6mm) diameter.
- Configuration and quantity of power and data ports cannot be modified in the field.
- Application may require approval of local authority having jurisdiction (AHJ); ensure compliance before placing orders and installation.

To Order, Specify:

- 1) Product number.
(No finish specification required.)

Enhanced Power Module

Hardwire

Top Width	Top Depth	Conduit Length	Housing Color	Port Color	Port	Configuration	Number	Price
5" (127mm)	3" (76mm)	6' (1829mm)	Black Anodized	Black	3	1 Power Receptacle, 1 Cable Bay	EUD1-HF0B-1002	\$544.81
						1 Power Receptacle, 2 Data Ports	EUD1-HF0B-1020	544.81
						1 Power Receptacle, 1 Data Port, 1 USB Charging	EUD1-HF0B-1110	604.81
						1 Power Receptacle, 2 USB Charging	EUD1-HF0B-1200	664.81
						2 Power Receptacles, 1 Data Port	EUD1-HF0B-2010	544.81
						2 Power Receptacles, 1 USB Charging	EUD1-HF0B-2100	604.81
						3 Power Receptacles	EUD1-HF0B-3000	544.81
6 1/2" (165mm)	3" (76mm)				4	1 Power Receptacle, 1 Data Port, 1 Cable Bay	EUD1-HF0B-1012	\$544.81
						1 Power Receptacle, 3 Data Ports	EUD1-HF0B-1030	544.81
						1 Power Receptacle, 1 USB Charging, 1 Cable Bay	EUD1-HF0B-1102	604.81
						1 Power Receptacle, 3 USB Charging	EUD1-HF0B-1300	724.81
						2 Power Receptacles, 1 Cable Bay	EUD1-HF0B-2002	544.81
						2 Power Receptacles, 2 Data Ports	EUD1-HF0B-2020	544.81
						2 Power Receptacles, 1 USB Charging, 1 Data Port	EUD1-HF0B-2110	604.81
						2 Power Receptacles, 2 USB Charging	EUD1-HF0B-2200	664.81
						3 Power Receptacles, 1 Data Port	EUD1-HF0B-3010	544.81
						3 Power Receptacles, 1 USB Charging	EUD1-HF0B-3100	604.81
9 1/2" (241mm)	3" (76mm)				6	1 Power Receptacle, 1 USB Charging, 2 Cable Bays	EUD1-HF0B-1104	\$656.81
						1 Power Receptacle, 1 USB Charging, 2 Data Ports, 1 Cable Bay	EUD1-HF0B-1122	656.81
						1 Power Receptacle, 1 USB Charging, 4 Data Ports	EUD1-HF0B-1140	656.81
						1 Power Receptacle, 2 USB Charging, 1 Data Port, 1 Cable Bay	EUD1-HF0B-1212	716.81
						1 Power Receptacle, 2 USB Charging, 3 Data Ports	EUD1-HF0B-1230	716.81
						1 Power Receptacle, 3 USB Charging, 1 Cable Bay	EUD1-HF0B-1302	776.81
						1 Power Receptacle, 3 USB Charging, 2 Data Ports	EUD1-HF0B-1320	776.81
						1 Power Receptacle, 4 USB Charging, 1 Data Port	EUD1-HF0B-1410	836.81
						2 Power Receptacles, 2 Cable Bays	EUD1-HF0B-2004	596.81
						2 Power Receptacles, 2 Data Ports, 1 Cable Bay	EUD1-HF0B-2022	596.81
						2 Power Receptacles, 4 Data Ports	EUD1-HF0B-2040	596.81
						2 Power Receptacles, 1 USB Charging, 1 Data Port, 1 Cable Bay	EUD1-HF0B-2112	656.81
						2 Power Receptacles, 1 USB Charging, 3 Data Ports	EUD1-HF0B-2130	656.81
						2 Power Receptacles, 2 USB Charging, 1 Cable Bay	EUD1-HF0B-2202	716.81
						2 Power Receptacles, 2 USB Charging, 2 Data Ports	EUD1-HF0B-2220	716.81
						2 Power Receptacles, 3 USB Charging, 1 Data Port	EUD1-HF0B-2310	776.81
						2 Power Receptacles, 4 USB Charging	EUD1-HF0B-2400	836.81
						3 Power Receptacles, 3 Data Ports	EUD1-HF0B-3030	596.81
						3 Power Receptacles, 1 USB Charging, 1 Cable Bay	EUD1-HF0B-3102	656.81
						3 Power Receptacles, 1 USB Charging, 2 Data Ports	EUD1-HF0B-3120	656.81
						3 Power Receptacles, 2 USB Charging, 1 Data Port	EUD1-HF0B-3210	716.81
						3 Power Receptacles, 3 USB Charging	EUD1-HF0B-3300	776.81
						4 Power Receptacles, 1 Cable Bay	EUD1-HF0B-4002	596.81
						4 Power Receptacles, 2 Data Ports	EUD1-HF0B-4020	596.81
						4 Power Receptacles, 1 USB Charging, 1 Data Port	EUD1-HF0B-4110	656.81
						4 Power Receptacles, 2 USB Charging	EUD1-HF0B-4200	716.81
						5 Power Receptacles, 1 Data Port	EUD1-HF0B-5010	596.81
						5 Power Receptacles, 1 USB Charging	EUD1-HF0B-5100	656.81
						6 Power Receptacles	EUD1-HF0B-6000	596.81

Enhanced Power Module

Hardwire

Top Width	Top Depth	Conduit Length	Housing Color	Port Color	Port	Configuration	Number	Price
5" (127mm)	3" (76mm)	6' (1829mm)	Clear Anodized	White	3	1 Power Receptacle, 1 Cable Bay	EUD1-HF0W-1002	\$440.81
						1 Power Receptacle, 2 Data Ports	EUD1-HF0W-1020	440.81
						1 Power Receptacle, 1 Data Port, 1 USB Charging	EUD1-HF0W-1110	500.81
						1 Power Receptacle, 2 USB Charging	EUD1-HF0W-1200	560.81
						2 Power Receptacles, 1 Data Port	EUD1-HF0W-2010	440.81
						2 Power Receptacles, 1 USB Charging	EUD1-HF0W-2100	500.81
						3 Power Receptacles	EUD1-HF0W-3000	440.81
6 1/2" (165mm)	3" (76mm)				4	1 Power Receptacle, 1 Data Port, 1 Cable Bay	EUD1-HF0W-1012	\$440.81
						1 Power Receptacle, 3 Data Ports	EUD1-HF0W-1030	440.81
						1 Power Receptacle, 1 USB Charging, 1 Cable Bay	EUD1-HF0W-1102	500.81
						1 Power Receptacle, 3 USB Charging	EUD1-HF0W-1300	620.81
						2 Power Receptacles, 1 Cable Bay	EUD1-HF0W-2002	440.81
						2 Power Receptacles, 2 Data Ports	EUD1-HF0W-2020	440.81
						2 Power Receptacles, 1 USB Charging, 1 Data Port	EUD1-HF0W-2110	500.81
						2 Power Receptacles, 2 USB Charging	EUD1-HF0W-2200	560.81
						3 Power Receptacles, 1 Data Port	EUD1-HF0W-3010	440.81
						3 Power Receptacles, 1 USB Charging	EUD1-HF0W-3100	500.81
9 1/2" (241mm)	3" (76mm)				6	1 Power Receptacle, 1 USB Charging, 2 Cable Bays	EUD1-HF0W-1104	\$552.81
						1 Power Receptacle, 1 USB Charging, 2 Data Ports, 1 Cable Bay	EUD1-HF0W-1122	552.81
						1 Power Receptacle, 1 USB Charging, 4 Data Ports	EUD1-HF0W-1140	552.81
						1 Power Receptacle, 2 USB Charging, 1 Data Port, 1 Cable Bay	EUD1-HF0W-1212	612.81
						1 Power Receptacle, 2 USB Charging, 3 Data Ports	EUD1-HF0W-1230	612.81
						1 Power Receptacle, 3 USB Charging, 1 Cable Bay	EUD1-HF0W-1302	672.81
						1 Power Receptacle, 3 USB Charging, 2 Data Ports	EUD1-HF0W-1320	672.81
						1 Power Receptacle, 4 USB Charging, 1 Data Port	EUD1-HF0W-1410	732.81
						2 Power Receptacles, 2 Cable Bays	EUD1-HF0W-2004	492.81
						2 Power Receptacles, 2 Data Ports, 1 Cable Bay	EUD1-HF0W-2022	492.81
						2 Power Receptacles, 4 Data Ports	EUD1-HF0W-2040	492.81
						2 Power Receptacles, 1 USB Charging, 1 Data Port, 1 Cable Bay	EUD1-HF0W-2112	552.81
						2 Power Receptacles, 1 USB Charging, 3 Data Ports	EUD1-HF0W-2130	552.81
						2 Power Receptacles, 2 USB Charging, 1 Cable Bay	EUD1-HF0W-2202	612.81
						2 Power Receptacles, 2 USB Charging, 2 Data Ports	EUD1-HF0W-2220	612.81
						2 Power Receptacles, 3 USB Charging, 1 Data Port	EUD1-HF0W-2310	672.81
						2 Power Receptacles, 4 USB Charging	EUD1-HF0W-2400	732.81
						3 Power Receptacles, 3 Data Ports	EUD1-HF0W-3030	492.81
						3 Power Receptacles, 1 USB Charging, 1 Cable Bay	EUD1-HF0W-3102	552.81
						3 Power Receptacles, 1 USB Charging, 2 Data Ports	EUD1-HF0W-3120	552.81
						3 Power Receptacles, 2 USB Charging, 1 Data Port	EUD1-HF0W-3210	612.81
						3 Power Receptacles, 3 USB Charging	EUD1-HF0W-3300	672.81
						4 Power Receptacles, 1 Cable Bay	EUD1-HF0W-4002	492.81
						4 Power Receptacles, 2 Data Ports	EUD1-HF0W-4020	492.81
						4 Power Receptacles, 1 USB Charging, 1 Data Port	EUD1-HF0W-4110	552.81
						4 Power Receptacles, 2 USB Charging	EUD1-HF0W-4200	612.81
						5 Power Receptacles, 1 Data Port	EUD1-HF0W-5010	492.81
						5 Power Receptacles, 1 USB Charging	EUD1-HF0W-5100	552.81
						6 Power Receptacles	EUD1-HF0W-6000	492.81

Enhanced Power Module

Hardwire

Top Width	Top Depth	Conduit Length	Housing Color	Port Color	Port	Configuration	Number	Price
5" (127mm)	3" (76mm)	12' (3658mm)	Black Anodized	Black	3	1 Power Receptacle, 1 Cable Bay	EUD1-HL0B-1002	\$593.69
						1 Power Receptacle, 2 Data Ports	EUD1-HL0B-1020	593.69
						1 Power Receptacle, 1 Data Port, 1 USB Charging	EUD1-HL0B-1110	653.69
						1 Power Receptacle, 2 USB Charging	EUD1-HL0B-1200	713.69
						2 Power Receptacles, 1 Data Port	EUD1-HL0B-2010	593.69
						2 Power Receptacles, 1 USB Charging	EUD1-HL0B-2100	653.69
6 1/2" (165mm)	3" (76mm)				4	3 Power Receptacles	EUD1-HL0B-3000	593.69
						1 Power Receptacle, 1 Data Port, 1 Cable Bay	EUD1-HL0B-1012	\$593.69
						1 Power Receptacle, 3 Data Ports	EUD1-HL0B-1030	593.69
						1 Power Receptacle, 1 USB Charging, 1 Cable Bay	EUD1-HL0B-1102	653.69
						1 Power Receptacle, 3 USB Charging	EUD1-HL0B-1300	773.69
						2 Power Receptacles, 1 Cable Bay	EUD1-HL0B-2002	593.69
						2 Power Receptacles, 2 Data Ports	EUD1-HL0B-2020	593.69
						2 Power Receptacles, 1 USB Charging, 1 Data Port	EUD1-HL0B-2110	653.69
						2 Power Receptacles, 2 USB Charging	EUD1-HL0B-2200	713.69
						3 Power Receptacles, 1 Data Port	EUD1-HL0B-3010	593.69
9 1/2" (241mm)	3" (76mm)				6	3 Power Receptacles, 1 USB Charging	EUD1-HL0B-3100	653.69
						4 Power Receptacles	EUD1-HL0B-4000	593.69
						1 Power Receptacle, 1 USB Charging, 2 Cable Bays	EUD1-HL0B-1104	\$705.69
						1 Power Receptacle, 1 USB Charging, 2 Data Ports, 1 Cable Bay	EUD1-HL0B-1122	705.69
						1 Power Receptacle, 1 USB Charging, 4 Data Ports	EUD1-HL0B-1140	705.69
						1 Power Receptacle, 2 USB Charging, 1 Data Port, 1 Cable Bay	EUD1-HL0B-1212	765.69
						1 Power Receptacle, 2 USB Charging, 3 Data Ports	EUD1-HL0B-1230	765.69
						1 Power Receptacle, 3 USB Charging, 1 Cable Bay	EUD1-HL0B-1302	825.69
						1 Power Receptacle, 3 USB Charging, 2 Data Ports	EUD1-HL0B-1320	825.69
						1 Power Receptacle, 4 USB Charging, 1 Data Port	EUD1-HL0B-1410	885.69
						2 Power Receptacles, 2 Cable Bays	EUD1-HL0B-2004	645.69
						2 Power Receptacles, 2 Data Ports, 1 Cable Bay	EUD1-HL0B-2022	645.69
						2 Power Receptacles, 4 Data Ports	EUD1-HL0B-2040	645.69
						2 Power Receptacles, 1 USB Charging, 1 Data Port, 1 Cable Bay	EUD1-HL0B-2112	705.69
						2 Power Receptacles, 1 USB Charging, 3 Data Ports	EUD1-HL0B-2130	705.69
						2 Power Receptacles, 2 USB Charging, 1 Cable Bay	EUD1-HL0B-2202	765.69
						2 Power Receptacles, 2 USB Charging, 2 Data Ports	EUD1-HL0B-2220	765.69
						2 Power Receptacles, 3 USB Charging, 1 Data Port	EUD1-HL0B-2310	825.69
						2 Power Receptacles, 4 USB Charging	EUD1-HL0B-2400	885.69
						3 Power Receptacles, 3 Data Ports	EUD1-HL0B-3030	645.69
						3 Power Receptacles, 1 USB Charging, 1 Cable Bay	EUD1-HL0B-3102	705.69
						3 Power Receptacles, 1 USB Charging, 2 Data Ports	EUD1-HL0B-3120	705.69
						3 Power Receptacles, 2 USB Charging, 1 Data Port	EUD1-HL0B-3210	765.69
						3 Power Receptacles, 3 USB Charging	EUD1-HL0B-3300	825.69
						4 Power Receptacles, 1 Cable Bay	EUD1-HL0B-4002	645.69
						4 Power Receptacles, 2 Data Ports	EUD1-HL0B-4020	645.69
						4 Power Receptacles, 1 USB Charging, 1 Data Port	EUD1-HL0B-4110	705.69
						4 Power Receptacles, 2 USB Charging	EUD1-HL0B-4200	765.69
						5 Power Receptacles, 1 Data Port	EUD1-HL0B-5010	645.69
						5 Power Receptacles, 1 USB Charging	EUD1-HL0B-5100	705.69
						6 Power Receptacles	EUD1-HL0B-6000	645.69

Enhanced Power Module



Hardwire

Top Width	Top Depth	Conduit Length	Housing Color	Port Color	Port	Configuration	Number	Price
5" (127mm)	3" (76mm)	12' (3658mm)	Clear Anodized	White	3	1 Power Receptacle, 1 Cable Bay	EUD1-HLOW-1002	\$489.69
						1 Power Receptacle, 2 Data Ports	EUD1-HLOW-1020	489.69
						1 Power Receptacle, 1 Data Port, 1 USB Charging	EUD1-HLOW-1110	549.69
						1 Power Receptacle, 2 USB Charging	EUD1-HLOW-1200	609.69
						2 Power Receptacles, 1 Data Port	EUD1-HLOW-2010	489.69
						2 Power Receptacles, 1 USB Charging	EUD1-HLOW-2100	549.69
						3 Power Receptacles	EUD1-HLOW-3000	489.69
6 1/2" (165mm)	3" (76mm)				4	1 Power Receptacle, 1 Data Port, 1 Cable Bay	EUD1-HLOW-1012	\$489.69
						1 Power Receptacle, 3 Data Ports	EUD1-HLOW-1030	489.69
						1 Power Receptacle, 1 USB Charging, 1 Cable Bay	EUD1-HLOW-1102	549.69
						1 Power Receptacle, 3 USB Charging	EUD1-HLOW-1300	669.69
						2 Power Receptacles, 1 Cable Bay	EUD1-HLOW-2002	489.69
						2 Power Receptacles, 2 Data Ports	EUD1-HLOW-2020	489.69
						2 Power Receptacles, 1 USB Charging, 1 Data Port	EUD1-HLOW-2110	549.69
						2 Power Receptacles, 2 USB Charging	EUD1-HLOW-2200	609.69
						3 Power Receptacles, 1 Data Port	EUD1-HLOW-3010	489.69
						3 Power Receptacles, 1 USB Charging	EUD1-HLOW-3100	549.69
9 1/2" (241mm)	3" (76mm)				6	1 Power Receptacle, 1 USB Charging, 2 Cable Bays	EUD1-HLOW-1104	\$601.69
						1 Power Receptacle, 1 USB Charging, 2 Data Ports, 1 Cable Bay	EUD1-HLOW-1122	601.69
						1 Power Receptacle, 1 USB Charging, 4 Data Ports	EUD1-HLOW-1140	601.69
						1 Power Receptacle, 2 USB Charging, 1 Data Port, 1 Cable Bay	EUD1-HLOW-1212	661.69
						1 Power Receptacle, 2 USB Charging, 3 Data Ports	EUD1-HLOW-1230	661.69
						1 Power Receptacle, 3 USB Charging, 1 Cable Bay	EUD1-HLOW-1302	721.69
						1 Power Receptacle, 3 USB Charging, 2 Data Ports	EUD1-HLOW-1320	721.69
						1 Power Receptacle, 4 USB Charging, 1 Data Port	EUD1-HLOW-1410	781.69
						2 Power Receptacles, 2 Cable Bays	EUD1-HLOW-2004	541.69
						2 Power Receptacles, 2 Data Ports, 1 Cable Bay	EUD1-HLOW-2022	541.69
						2 Power Receptacles, 4 Data Ports	EUD1-HLOW-2040	541.69
						2 Power Receptacles, 1 USB Charging, 1 Data Port, 1 Cable Bay	EUD1-HLOW-2112	601.69
						2 Power Receptacles, 1 USB Charging, 3 Data Ports	EUD1-HLOW-2130	601.69
						2 Power Receptacles, 2 USB Charging, 1 Cable Bay	EUD1-HLOW-2202	661.69
						2 Power Receptacles, 2 USB Charging, 2 Data Ports	EUD1-HLOW-2220	661.69
						2 Power Receptacles, 3 USB Charging, 1 Data Port	EUD1-HLOW-2310	721.69
						2 Power Receptacles, 4 USB Charging	EUD1-HLOW-2400	781.69
						3 Power Receptacles, 3 Data Ports	EUD1-HLOW-3030	541.69
						3 Power Receptacles, 1 USB Charging, 1 Cable Bay	EUD1-HLOW-3102	601.69
						3 Power Receptacles, 1 USB Charging, 2 Data Ports	EUD1-HLOW-3120	601.69
						3 Power Receptacles, 2 USB Charging, 1 Data Port	EUD1-HLOW-3210	661.69
						3 Power Receptacles, 3 USB Charging	EUD1-HLOW-3300	721.69
						4 Power Receptacles, 1 Cable Bay	EUD1-HLOW-4002	541.69
						4 Power Receptacles, 2 Data Ports	EUD1-HLOW-4020	541.69
						4 Power Receptacles, 1 USB Charging, 1 Data Port	EUD1-HLOW-4110	601.69
						4 Power Receptacles, 2 USB Charging	EUD1-HLOW-4200	661.69
						5 Power Receptacles, 1 Data Port	EUD1-HLOW-5010	541.69
						5 Power Receptacles, 1 USB Charging	EUD1-HLOW-5100	601.69
						6 Power Receptacles	EUD1-HLOW-6000	541.69

Enhanced Power Module

Spiral Corded — Height Adjustable

Top Width	Top Depth	Cord Length	Housing Color	Port Color	Port	Configuration	Number	Price
6 1/2" (165mm)	3" (76mm)	10'(3048mm)-12'(3658mm)	Black Anodized	Black	4	2 Power Receptacles, 1 USB Charging, 1 Data Port	EUD1-SF0B-2110	\$767.13
					4	2 Power Receptacles, 2 USB Charging	EUD1-SF0B-2200	827.13
					4	3 Power Receptacles, 1 Data Port	EUD1-SF0B-3010	707.13
					4	3 Power Receptacles, 1 USB Charging	EUD1-SF0B-3100	767.13
					4	4 Power Receptacles	EUD1-SF0B-4000	707.13
			Clear Anodized	White	4	2 Power Receptacles, 1 USB Charging, 1 Data Port	EUD1-SF0W-2110	\$663.13
					4	2 Power Receptacles, 2 USB Charging	EUD1-SF0W-2200	723.13
					4	3 Power Receptacles, 1 Data Port	EUD1-SF0W-3010	603.13
					4	3 Power Receptacles, 1 USB Charging	EUD1-SF0W-3100	663.13
					4	4 Power Receptacles	EUD1-SF0W-4000	603.13

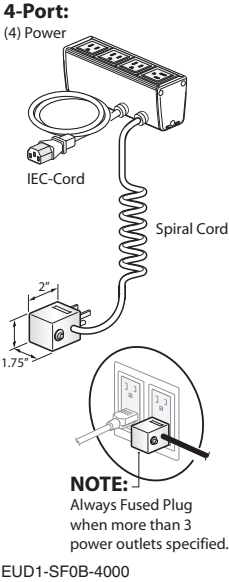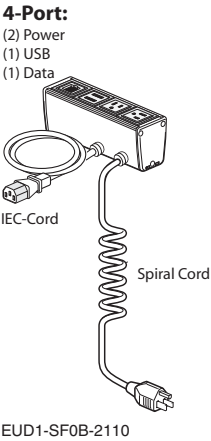

Features

- Includes power module with 4 ports that can be configured with simplex outlets (NEMA-5-15R), USB charging simplex (with two USB outlets), data jack adapters or a cable bay that can accept up to 2 pull out data/AV cables, 2'(610mm) power cord with IEC connector for motor controller and mounting hardware.
- Data jack adapters accommodate most varieties of field supplied data jacks or separately specified AV cables.
- Spiral Cord includes 15 amp plug (NEMA 5-15P) and expands from 10'(3048mm) to 12'(3658mm) when stretched.
- Auxiliary power cord includes IEC connector (IEC C13) for motor controller.
- Attaches to surface with use of separately specified mounting brackets.
- USB Charging simplex consists of 2 USB outlets. 1,000mA of charging power per USB outlet.
- Color option of black anodized housing with black receptacles or clear anodized housing with white receptacles.

Specification Tips

- Separately specify attachment hardware for desired application.
- Not for use with cable chain.
- For use with 120 volt 60 hertz power source only.
- Requires field installation.
- Configuration and quantity of power and data ports cannot be modified in the field.
- Application may require approval of local authority having jurisdiction (AHJ); ensure compliance before placing orders and installation.

To Order, Specify:

- 1) Product number.
(No finish specification required.)


Enhanced Power Module

Cord for Height Adjustable

Top Width	Top Depth	Cord Length	Housing Color	Port Color	Port	Configuration	Number	Price
6 1/2" (165mm)	3" (76mm)	10'(3048mm)-12'(3658mm)	Black Anodized	Black	4	2 Power Receptacles, 1 USB Charging, 1 Data Port	EUD1-SL0B-2110	\$816.01
					4	2 Power Receptacles, 2 USB Charging	EUD1-SL0B-2200	876.01
					4	3 Power Receptacles, 1 Data Port	EUD1-SL0B-3010	756.01
					4	3 Power Receptacles, 1 USB Charging	EUD1-SL0B-3100	816.01
					4	4 Power Receptacles	EUD1-SL0B-4000	756.01
			Clear Anodized	White	4	2 Power Receptacles, 1 USB Charging, 1 Data Port	EUD1-SLOW-2110	\$712.01
					4	2 Power Receptacles, 2 USB Charging	EUD1-SLOW-2200	772.01
					4	3 Power Receptacles, 1 Data Port	EUD1-SLOW-3010	652.01
					4	3 Power Receptacles, 1 USB Charging	EUD1-SLOW-3100	712.01
					4	4 Power Receptacles	EUD1-SLOW-4000	652.01

4-Port:



(2) Power
(1) USB
(1) Data



EUD1-SL0B-2110

4-Port:

(4) Power



NOTE:

Always Fused Plug when more than 3 power outlets specified.

EUD1-SL0B-4000



Features

- Includes power module with 4 ports that can be configured with simplex outlets (NEMA-5-15R), USB charging simplex (with two USB outlets), data jack adapters or a cable bay that can accept up to 2 pull out data/AV cables, 2'(610mm) power cord with IEC connector for motor controller and mounting hardware.
- Data jack adapters accommodate most varieties of field supplied data jacks or separately specified AV cables.
- Corded power module with 15 amp - 12'(3658mm) long cord with plug (NEMA 5-15P).
- Auxiliary power cord includes IEC connector (IEC C13) for motor controller.
- Attaches to surface with use of separately specified mounting brackets.
- USB Charging simplex consists of 2 USB outlets. 1,000mA of charging power per USB outlet.
- Color option of black anodized housing with black receptacles or clear anodized housing with white receptacles.

Specification Tips


- Separately specify attachment hardware for desired application.
- Designed to be used with cable chain.
- For use with 120 volt 60 hertz power source only.
- Requires field installation.
- Configuration and quantity of power and data ports cannot be modified in the field.
- Application may require approval of local authority having jurisdiction (AHJ); ensure compliance before placing orders and installation.

To Order, Specify:

- Product number.
(No finish specification required.)

Enhanced Power Module Brackets

	Height	Width	Length	Description	Number	Price
Above Worksurface – Adjustable	4"(102mm)	3 1/2"(89mm)	3 1/2"(89mm)	Black Bracket	EUDB-0000-HB	\$52.00
				White Bracket	EUDB-0000-HW	52.00

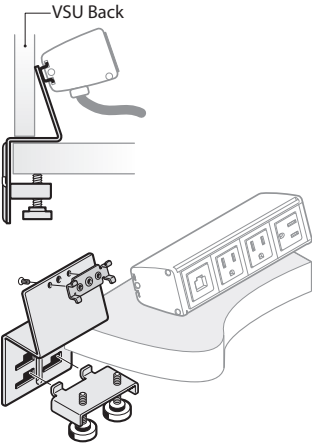


EUDB-0000-H



- Features**
 - Includes bracket and mounting hardware.
 - For use with 3, 4 or 6 port Enhanced Power Module.
 - Available in black or white.
 - Mounts to back edge of 1 1/8"(29mm) to 2"(51mm) worktop.
 - Not for use with a tack board.
- To Order, Specify:**
 - 1) Product number.
(No finish specification required.)
- Specification Tips**
 - Specify Enhanced Power Module separately.
 - Requires field installation.
 - Application may require approval of local authority having jurisdiction (AHJ); ensure compliance before placing orders and installation.

Above Worksurface – Fixed	4 1/4"(107mm)	3"(76mm)	2"(51mm)	Black Bracket	EUDB-0000-WB	\$52.00
				White Bracket	EUDB-0000-WW	52.00

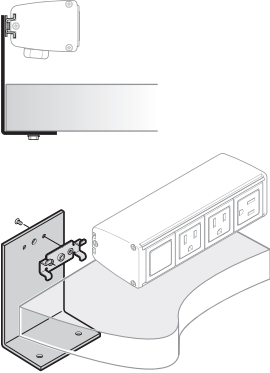

EUDB-0000-W



- Features**
 - Includes bracket and mounting hardware.
 - For use with 3, 4 or 6 port Enhanced Power Module.
 - Available in black or white.
 - Mounts under worksurface with Enhanced Power Module above worksurface.
- To Order, Specify:**
 - 1) Product number.
(No finish specification required.)
- Specification Tips**
 - Specify Enhanced Power Module separately.
 - Requires field installation.
 - Application may require approval of local authority having jurisdiction (AHJ); ensure compliance before placing orders and installation.

Enhanced Power Module Brackets

	Height	Width	Length	Description	Number	Price
Above Worksurface – Adjustable with Tackboard Offset	4"(102mm)	3 1/2"(89mm)	3 1/2"(89mm)	Black Bracket	EUDB-0000-TB	\$52.00
				White Bracket	EUDB-0000-TW	52.00

Features


- Includes bracket and mounting hardware.
- For use with 3, 4 or 6 port Enhanced Power Module.
- Available in black or white.
- Mounts to back edge of 1 1/8"(29mm) to 2"(51mm) worktop when a tackboard is present.

To Order, Specify:

- 1) Product number.
(No finish specification required.)

Specification Tips

- Specify Enhanced Power Module separately.
- Requires field installation.
- Application may require approval of local authority having jurisdiction (AHJ); ensure compliance before placing orders and installation.

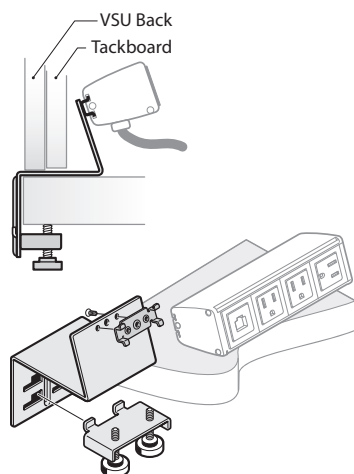

EUDB-0000-T



Under Worksurface – Fixed	2"(51mm)	3"(76mm)	2 1/2"(64mm)	Black Bracket	EUDB-0000-UB	\$52.00
				White Bracket	EUDB-0000-UW	52.00

Features


- Includes bracket and mounting hardware.
- For use with 3, 4 or 6 port Enhanced Power Module.
- Available in black or white.
- Mounts under worksurface with offset to accommodate most transformer plugs.

To Order, Specify:

- 1) Product number.
(No finish specification required.)

Specification Tips

- Specify Enhanced Power Module separately.
- Requires field installation.
- Application may require approval of local authority having jurisdiction (AHJ); ensure compliance before placing orders and installation.

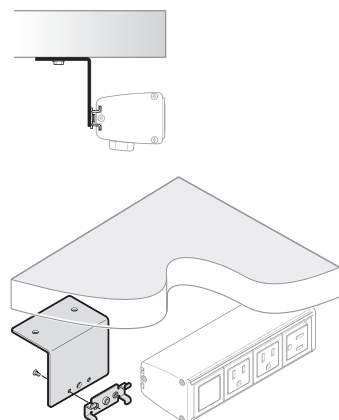


EUDB-0000-U



Flip Top Units

Non-Powered

Width	Bezel Depth	Trim Color	Port Color	Port	Configuration	Number	Price
Single-Sided Outlets							
5 5/16"(135mm)	4 7/16"(113mm)	Black Anodized	Black	2	1 Cable Bay	EUE1-000B-0002	\$ 638.70
					2 Data Ports	EUE1-000B-0020	638.70
8 5/16"(211mm)	4 7/16"(113mm)			4	2 Data Ports, 1 Cable Bay	EUE1-000B-0022	\$ 638.70
					4 Data Ports	EUE1-000B-0040	638.70
11 5/16"(287mm)	4 7/16"(113mm)			6	4 Data Ports, 1 Cable Bay	EUE1-000B-0042	\$ 638.70
					6 Data Ports	EUE1-000B-0060	638.70
5 5/16"(135mm)	4 7/16"(113mm)	Clear Anodized	White	2	1 Cable Bay	EUE1-000W-0002	\$ 476.46
					2 Data Ports	EUE1-000W-0020	476.46
8 5/16"(211mm)	4 7/16"(113mm)			4	2 Data Ports, 1 Cable Bay	EUE1-000W-0022	\$ 476.46
					4 Data Ports	EUE1-000W-0040	476.46
11 5/16"(287mm)	4 7/16"(113mm)			6	4 Data Ports, 1 Cable Bay	EUE1-000W-0042	\$ 476.46
					6 Data Ports	EUE1-000W-0060	476.46
Double-Sided Outlets							
8 5/16"(211mm)	8 1/16"(205mm)	Black Anodized	Black	4	2 Data Ports, 1 Cable Bay	EUE2-000B-0022	\$1112.17
					4 Data Ports	EUE2-000B-0040	1112.17
11 5/16"(287mm)	8 1/16"(205mm)			6	4 Data Ports, 1 Cable Bay	EUE2-000B-0042	\$1112.17
					6 Data Ports	EUE2-000B-0060	1112.17
8 5/16"(211mm)	8 1/16"(205mm)	Clear Anodized	White	4	2 Data Ports, 1 Cable Bay	EUE2-000W-0022	\$ 949.93
					4 Data Ports	EUE2-000W-0040	949.93
11 5/16"(287mm)	8 1/16"(205mm)			6	4 Data Ports, 1 Cable Bay	EUE2-000W-0042	\$ 949.93
					6 Data Ports	EUE2-000W-0060	949.93

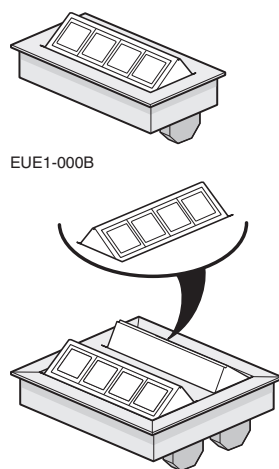

EUE2-000B



Features

- Includes bezel and nonpowered flip top module with 2, 4 or 6 ports that can be configured with data jack adapters or cable bays and mounting hardware.
- Data jack adapters accommodate most varieties of field supplied data jacks or separately specified AV cables.
- Each Cable Bay can accept up to 2 pull out data/AV cables
- Flip top unit is flush mounted with spring release flip module(s).
- Flip top unit overall height is 2 3/4"(70mm) and will extend below the table tops.
- Color option of black anodized housing with black receptacles or clear anodized housing with white receptacles.
- Ships assembled.

Specification Tips

- Requires field installation.
- Specify factory cut hole or field cut hole as required.
- Specify AV cables separately.
- Cable Bay requires cables less than 0.3"(7.6mm) diameter.
- Configuration and quantity of power and data ports cannot be modified in the field.
- Application may require approval of local authority having jurisdiction (AHJ); ensure compliance before placing orders and installation.

To Order, Specify:


- 1) Product number.
(No finish specification required.)

Flip Top Unit

Corded — Single-Sided

4-Port:


- (2) Power
- (1) USB
- (1) Data



Power Cord
EUE1-PF0B-2110

6-Port:


- (2) Power
- (1) USB
- (1) Data
- (1) Cable Bay



Power Cord
EUE1-PF0B-1212

4-Port:

- (4) Power

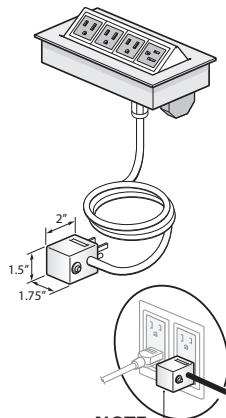

NOTE:
Always Fused Plug
when more than 3
power outlets specified.

EUE1-PF0B-4000



Features

- Includes bezel and flip top module with 2, 4 or 6 ports that can be configured with simplex outlets (NEMA-5-15P), USB charging simplex (with two USB outlets), data jack adapters or cable bay(s) that can accept up to 2 pull out data/AV cables and mounting hardware.
- Data jack adapters accommodate most varieties of field supplied data jacks or separately specified AV cables.
- Each Cable Bay can accept up to 2 pull out data/AV cables.
- Corded power module available with 15 amp - 6'(1829mm) or 12'(3658mm) long cord with plug (NEMA 5-15P).
- USB Charging Port consists of 2 USB outlets. 1,000mA of charging power per USB outlet.
- Flip top unit is flush mounted with spring release flip module.
- Flip top unit overall height is 2 3/4"(70mm) and will extend below the table tops.
- Color option of black anodized housing with black receptacles or clear anodized housing with white receptacles.
- Ships assembled.

Specification Tips

- For use with 120 volt 60 hertz power source only.
- Requires field installation.
- Specify factory cut hole or field cut hole as required.
- Specify AV cables separately.
- Cable Bay requires cables less than 0.3"(7.6mm) diameter.
- Configuration and quantity of power and data ports cannot be modified in the field.
- Corded flip top units with four or more receptacles utilize a fused plug that may block adjacent building receptacle outlet.
- Application may require approval of local authority having jurisdiction (AHJ); ensure compliance before placing orders and installation.

To Order, Specify:

- 1) Product number.
(No finish specification required.)

Note: Order flip top units to match flip top unit cutout option specified for each top (A/B, F/V or J/K).

Flip Top Unit

Corded — Single-Sided

Bezel Width	Bezel Depth	Cord Length	Trim Color	Port Color	Port	Configuration	Flip Top Unit Cutout Code Options	Number	Price
5 5/16" (135mm)	4 7/16" (113mm)	6' (1829mm)	Black Anodized	Black	2	1 Power Receptacle, 1 Data Port	A, B	EUE1-PF0B-1010	\$638.70
						1 Power Receptacle, 1 USB Charging	A, B	EUE1-PF0B-1100	698.70
						2 Power Receptacles	A, B	EUE1-PF0B-2000	638.70
8 5/16" (211mm)	4 7/16" (113mm)				4	1 Power Receptacle, 1 Data Port, 1 Cable Bay	F, V	EUE1-PF0B-1012	\$638.70
						1 Power Receptacle, 3 Data Ports	F, V	EUE1-PF0B-1030	638.70
						1 Power Receptacle, 1 USB Charging, 1 Cable Bay	F, V	EUE1-PF0B-1102	698.70
						1 Power Receptacle, 1 USB Charging, 2 Data Ports	F, V	EUE1-PF0B-1120	698.70
						1 Power Receptacle, 3 USB Charging	F, V	EUE1-PF0B-1300	818.70
						2 Power Receptacles, 1 Cable Bay	F, V	EUE1-PF0B-2002	638.70
						2 Power Receptacles, 2 Data Ports	F, V	EUE1-PF0B-2020	638.70
						2 Power Receptacles, 1 USB Charging, 1 Data Port	F, V	EUE1-PF0B-2110	698.70
						2 Power Receptacles, 2 USB Charging	F, V	EUE1-PF0B-2200	758.70
						3 Power Receptacles, 1 Data Port	F, V	EUE1-PF0B-3010	638.70
						3 Power Receptacles, 1 USB Charging	F, V	EUE1-PF0B-3100	698.70
						4 Power Receptacles	F, V	EUE1-PF0B-4000	638.70
						1 Power Receptacle, 3 Data Ports, 1 Cable Bay	J, K	EUE1-PF0B-1032	\$638.70
						1 Power Receptacle, 5 Data Ports	J, K	EUE1-PF0B-1050	638.70
						1 Power Receptacle, 1 USB Charging, 2 Data Ports, 1 Cable Bay	J, K	EUE1-PF0B-1122	698.70
11 5/16" (287mm)	4 7/16" (113mm)				6	1 Power Receptacle, 1 USB Charging, 4 Data Ports	J, K	EUE1-PF0B-1140	698.70
						1 Power Receptacle, 2 USB Charging, 1 Data Port, 1 Cable Bay	J, K	EUE1-PF0B-1212	758.70
						1 Power Receptacle, 2 USB Charging, 3 Data Ports	J, K	EUE1-PF0B-1230	758.70
						1 Power Receptacle, 3 USB Charging, 1 Cable Bay	J, K	EUE1-PF0B-1302	818.70
						1 Power Receptacle, 3 USB Charging, 2 Data Ports	J, K	EUE1-PF0B-1320	818.70
						2 Power Receptacles, 2 Data Ports, 1 Cable Bay	J, K	EUE1-PF0B-2022	638.70
						2 Power Receptacles, 4 Data Ports	J, K	EUE1-PF0B-2040	638.70
						2 Power Receptacles, 1 USB Charging, 1 Data Port, 1 Cable Bay	J, K	EUE1-PF0B-2112	698.70
						2 Power Receptacles, 1 USB Charging, 3 Data Ports	J, K	EUE1-PF0B-2130	698.70
						2 Power Receptacles, 2 USB Charging, 1 Cable Bay	J, K	EUE1-PF0B-2202	758.70
						2 Power Receptacles, 2 USB Charging, 2 Data Ports	J, K	EUE1-PF0B-2220	758.70
						2 Power Receptacles, 3 USB Charging, 1 Data Port	J, K	EUE1-PF0B-2310	818.70
						2 Power Receptacles, 4 USB Charging	J, K	EUE1-PF0B-2400	878.70
						3 Power Receptacles, 1 Data Port, 1 Cable Bay	J, K	EUE1-PF0B-3012	638.70
						3 Power Receptacles, 3 Data Ports	J, K	EUE1-PF0B-3030	638.70
						3 Power Receptacles, 1 USB Charging, 1 Cable Bay	J, K	EUE1-PF0B-3102	698.70
						3 Power Receptacles, 1 USB Charging, 2 Data Ports	J, K	EUE1-PF0B-3120	698.70
						3 Power Receptacles, 2 USB Charging, 1 Data Port	J, K	EUE1-PF0B-3210	758.70
						3 Power Receptacles, 3 USB Charging	J, K	EUE1-PF0B-3300	818.70
						4 Power Receptacles, 1 Cable Bay	J, K	EUE1-PF0B-4002	638.70
						4 Power Receptacles, 2 Data Ports	J, K	EUE1-PF0B-4020	638.70
						4 Power Receptacles, 1 USB Charging, 1 Data Port	J, K	EUE1-PF0B-4110	698.70
						4 Power Receptacles, 2 USB Charging	J, K	EUE1-PF0B-4200	758.70
						5 Power Receptacles, 1 Data Port	J, K	EUE1-PF0B-5010	638.70
						5 Power Receptacles, 1 USB Charging	J, K	EUE1-PF0B-5100	698.70
						6 Power Receptacles	J, K	EUE1-PF0B-6000	638.70

Flip Top Unit

Corded — Single-Sided

Bezel Width	Bezel Depth	Cord Length	Trim Color	Port Color	Port	Configuration	Flip Top Unit Cutout Code Options	Number	Price
5 5/16" (135mm)	4 7/16" (113mm)	6' (1829mm)	Clear Anodized	White	2	1 Power Receptacle, 1 Data Port	A, B	EUE1-PF0W-1010	\$476.46
						1 Power Receptacle, 1 USB Charging	A, B	EUE1-PF0W-1100	536.46
						2 Power Receptacles	A, B	EUE1-PF0W-2000	476.46
8 5/16" (211mm)	4 7/16" (113mm)				4	1 Power Receptacle, 1 Data Port, 1 Cable Bay	F, V	EUE1-PF0W-1012	\$476.46
						1 Power Receptacle, 3 Data Ports	F, V	EUE1-PF0W-1030	476.46
						1 Power Receptacle, 1 USB Charging, 1 Cable Bay	F, V	EUE1-PF0W-1102	536.46
						1 Power Receptacle, 1 USB Charging, 2 Data Ports	F, V	EUE1-PF0W-1120	536.46
						1 Power Receptacle, 3 USB Charging	F, V	EUE1-PF0W-1300	656.46
						2 Power Receptacles, 1 Cable Bay	F, V	EUE1-PF0W-2002	476.46
						2 Power Receptacles, 2 Data Ports	F, V	EUE1-PF0W-2020	476.46
						2 Power Receptacles, 1 USB Charging, 1 Data Port	F, V	EUE1-PF0W-2110	536.46
						2 Power Receptacles, 2 USB Charging	F, V	EUE1-PF0W-2200	596.46
						3 Power Receptacles, 1 Data Port	F, V	EUE1-PF0W-3010	476.46
						3 Power Receptacles, 1 USB Charging	F, V	EUE1-PF0W-3100	536.46
						4 Power Receptacles	F, V	EUE1-PF0W-4000	476.46
						1 Power Receptacle, 3 Data Ports, 1 Cable Bay	J, K	EUE1-PF0W-1032	\$476.46
						1 Power Receptacle, 5 Data Ports	J, K	EUE1-PF0W-1050	476.46
						1 Power Receptacle, 1 USB Charging, 2 Data Ports, 1 Cable Bay	J, K	EUE1-PF0W-1122	536.46
11 5/16" (287mm)	4 7/16" (113mm)				6	1 Power Receptacle, 1 USB Charging, 4 Data Ports	J, K	EUE1-PF0W-1140	536.46
						1 Power Receptacle, 2 USB Charging, 1 Data Port, 1 Cable Bay	J, K	EUE1-PF0W-1212	596.46
						1 Power Receptacle, 2 USB Charging, 3 Data Ports	J, K	EUE1-PF0W-1230	596.46
						1 Power Receptacle, 3 USB Charging, 1 Cable Bay	J, K	EUE1-PF0W-1302	656.46
						1 Power Receptacle, 3 USB Charging, 2 Data Ports	J, K	EUE1-PF0W-1320	656.46
						2 Power Receptacles, 2 Data Ports, 1 Cable Bay	J, K	EUE1-PF0W-2022	476.46
						2 Power Receptacles, 4 Data Ports	J, K	EUE1-PF0W-2040	476.46
						2 Power Receptacles, 1 USB Charging, 1 Data Port, 1 Cable Bay	J, K	EUE1-PF0W-2112	536.46
						2 Power Receptacles, 1 USB Charging, 3 Data Ports	J, K	EUE1-PF0W-2130	536.46
						2 Power Receptacles, 2 USB Charging, 1 Cable Bay	J, K	EUE1-PF0W-2202	596.46
						2 Power Receptacles, 2 USB Charging, 2 Data Ports	J, K	EUE1-PF0W-2220	596.46
						2 Power Receptacles, 3 USB Charging, 1 Data Port	J, K	EUE1-PF0W-2310	656.46
						2 Power Receptacles, 4 USB Charging	J, K	EUE1-PF0W-2400	716.46
						3 Power Receptacles, 1 Data Port, 1 Cable Bay	J, K	EUE1-PF0W-3012	476.46
						3 Power Receptacles, 3 Data Ports	J, K	EUE1-PF0W-3030	476.46
						3 Power Receptacles, 1 USB Charging, 1 Cable Bay	J, K	EUE1-PF0W-3102	536.46
						3 Power Receptacles, 1 USB Charging, 2 Data Ports	J, K	EUE1-PF0W-3120	536.46
						3 Power Receptacles, 2 USB Charging, 1 Data Port	J, K	EUE1-PF0W-3210	596.46
						3 Power Receptacles, 3 USB Charging	J, K	EUE1-PF0W-3300	656.46
						4 Power Receptacles, 1 Cable Bay	J, K	EUE1-PF0W-4002	476.46
						4 Power Receptacles, 2 Data Ports	J, K	EUE1-PF0W-4020	476.46
						4 Power Receptacles, 1 USB Charging, 1 Data Port	J, K	EUE1-PF0W-4110	536.46
						4 Power Receptacles, 2 USB Charging	J, K	EUE1-PF0W-4200	596.46
						5 Power Receptacles, 1 Data Port	J, K	EUE1-PF0W-5010	476.46
						5 Power Receptacles, 1 USB Charging	J, K	EUE1-PF0W-5100	536.46
						6 Power Receptacles	J, K	EUE1-PF0W-6000	476.46

Flip Top Unit

Corded — Single-Sided

Bezel Width	Bezel Depth	Cord Length	Trim Color	Port Color	Port	Configuration	Flip Top Unit Cutout Code Options	Number	Price
5 5/16" (135mm)	4 7/16" (113mm)	12' (3658mm)	Black Anodized	Black	2	1 Power Receptacle, 1 Data Port	A, B	EUE1-PL0B-1010	\$687.72
						1 Power Receptacle, 1 USB Charging	A, B	EUE1-PL0B-1100	747.72
						2 Power Receptacles	A, B	EUE1-PL0B-2000	687.72
8 5/16" (211mm)	4 7/16" (113mm)				4	1 Power Receptacle, 1 Data Port, 1 Cable Bay	F, V	EUE1-PL0B-1012	\$687.72
						1 Power Receptacle, 3 Data Ports	F, V	EUE1-PL0B-1030	687.72
						1 Power Receptacle, 1 USB Charging, 1 Cable Bay	F, V	EUE1-PL0B-1102	747.72
						1 Power Receptacle, 1 USB Charging, 2 Data Ports	F, V	EUE1-PL0B-1120	747.72
						1 Power Receptacle, 3 USB Charging	F, V	EUE1-PL0B-1300	867.72
						2 Power Receptacles, 1 Cable Bay	F, V	EUE1-PL0B-2002	687.72
						2 Power Receptacles, 2 Data Ports	F, V	EUE1-PL0B-2020	687.72
						2 Power Receptacles, 1 USB Charging, 1 Data Port	F, V	EUE1-PL0B-2110	747.72
						2 Power Receptacles, 2 USB Charging	F, V	EUE1-PL0B-2200	807.72
						3 Power Receptacles, 1 Data Port	F, V	EUE1-PL0B-3010	687.72
						3 Power Receptacles, 1 USB Charging	F, V	EUE1-PL0B-3100	747.72
						4 Power Receptacles	F, V	EUE1-PL0B-4000	687.72
11 5/16" (287mm)	4 7/16" (113mm)				6	1 Power Receptacle, 3 Data Ports, 1 Cable Bay	J, K	EUE1-PL0B-1032	\$687.72
						1 Power Receptacle, 5 Data Ports	J, K	EUE1-PL0B-1050	687.72
						1 Power Receptacle, 1 USB Charging, 2 Data Ports, 1 Cable Bay	J, K	EUE1-PL0B-1122	747.72
						1 Power Receptacle, 1 USB Charging, 4 Data Ports	J, K	EUE1-PL0B-1140	747.72
						1 Power Receptacle, 2 USB Charging, 1 Data Port, 1 Cable Bay	J, K	EUE1-PL0B-1212	807.72
						1 Power Receptacle, 2 USB Charging, 3 Data Ports	J, K	EUE1-PL0B-1230	807.72
						1 Power Receptacle, 3 USB Charging, 1 Cable Bay	J, K	EUE1-PL0B-1302	867.72
						1 Power Receptacle, 3 USB Charging, 2 Data Ports	J, K	EUE1-PL0B-1320	867.72
						2 Power Receptacles, 2 Data Ports, 1 Cable Bay	J, K	EUE1-PL0B-2022	687.72
						2 Power Receptacles, 4 Data Ports	J, K	EUE1-PL0B-2040	687.72
						2 Power Receptacles, 1 USB Charging, 1 Data Port, 1 Cable Bay	J, K	EUE1-PL0B-2112	747.72
						2 Power Receptacles, 1 USB Charging, 3 Data Ports	J, K	EUE1-PL0B-2130	747.72
						2 Power Receptacles, 2 USB Charging, 1 Cable Bay	J, K	EUE1-PL0B-2202	807.72
						2 Power Receptacles, 2 USB Charging, 2 Data Ports	J, K	EUE1-PL0B-2220	807.72
						2 Power Receptacles, 3 USB Charging, 1 Data Port	J, K	EUE1-PL0B-2310	867.72
						2 Power Receptacles, 4 USB Charging	J, K	EUE1-PL0B-2400	927.72
						3 Power Receptacles, 1 Data Port, 1 Cable Bay	J, K	EUE1-PL0B-3012	687.72
						3 Power Receptacles, 3 Data Ports	J, K	EUE1-PL0B-3030	687.72
						3 Power Receptacles, 1 USB Charging, 1 Cable Bay	J, K	EUE1-PL0B-3102	747.72
						3 Power Receptacles, 1 USB Charging, 2 Data Ports	J, K	EUE1-PL0B-3120	747.72
						3 Power Receptacles, 2 USB Charging, 1 Data Port	J, K	EUE1-PL0B-3210	807.72
						3 Power Receptacles, 3 USB Charging	J, K	EUE1-PL0B-3300	867.72
						4 Power Receptacles, 1 Cable Bay	J, K	EUE1-PL0B-4002	687.72
						4 Power Receptacles, 2 Data Ports	J, K	EUE1-PL0B-4020	687.72
						4 Power Receptacles, 1 USB Charging, 1 Data Port	J, K	EUE1-PL0B-4110	747.72
						4 Power Receptacles, 2 USB Charging	J, K	EUE1-PL0B-4200	807.72
						5 Power Receptacles, 1 Data Port	J, K	EUE1-PL0B-5010	687.72
						5 Power Receptacles, 1 USB Charging	J, K	EUE1-PL0B-5100	747.72
						6 Power Receptacles	J, K	EUE1-PL0B-6000	687.72

Flip Top Unit

Corded — Single-Sided

Bezel Width	Bezel Depth	Cord Length	Trim Color	Port Color	Port	Configuration	Flip Top Unit Cutout Code Options	Number	Price
5 5/16" (135mm)	4 7/16" (113mm)	12' (3658mm)	Clear Anodized	White	2	1 Power Receptacle, 1 Data Port	A, B	EUE1-PL0W-1010	\$525.48
						1 Power Receptacle, 1 USB Charging	A, B	EUE1-PL0W-1100	585.48
						2 Power Receptacles	A, B	EUE1-PL0W-2000	525.48
8 5/16" (211mm)	4 7/16" (113mm)				4	1 Power Receptacle, 1 Data Port, 1 Cable Bay	F, V	EUE1-PL0W-1012	\$525.48
						1 Power Receptacle, 3 Data Ports	F, V	EUE1-PL0W-1030	525.48
						1 Power Receptacle, 1 USB Charging, 1 Cable Bay	F, V	EUE1-PL0W-1102	585.48
						1 Power Receptacle, 1 USB Charging, 2 Data Ports	F, V	EUE1-PL0W-1120	585.48
						1 Power Receptacle, 3 USB Charging	F, V	EUE1-PL0W-1300	705.48
						2 Power Receptacles, 1 Cable Bay	F, V	EUE1-PL0W-2002	525.48
						2 Power Receptacles, 2 Data Ports	F, V	EUE1-PL0W-2020	525.48
						2 Power Receptacles, 1 USB Charging, 1 Data Port	F, V	EUE1-PL0W-2110	585.48
						2 Power Receptacles, 2 USB Charging	F, V	EUE1-PL0W-2200	645.48
						3 Power Receptacles, 1 Data Port	F, V	EUE1-PL0W-3010	525.48
						3 Power Receptacles, 1 USB Charging	F, V	EUE1-PL0W-3100	585.48
						4 Power Receptacles	F, V	EUE1-PL0W-4000	525.48
						1 Power Receptacle, 3 Data Ports, 1 Cable Bay	J, K	EUE1-PL0W-1032	\$525.48
						1 Power Receptacle, 5 Data Ports	J, K	EUE1-PL0W-1050	525.48
11 5/16" (287mm)	4 7/16" (113mm)				6	1 Power Receptacle, 1 USB Charging, 2 Data Ports, 1 Cable Bay	J, K	EUE1-PL0W-1122	585.48
						1 Power Receptacle, 1 USB Charging, 4 Data Ports	J, K	EUE1-PL0W-1140	585.48
						1 Power Receptacle, 2 USB Charging, 1 Data Port, 1 Cable Bay	J, K	EUE1-PL0W-1212	645.48
						1 Power Receptacle, 2 USB Charging, 3 Data Ports	J, K	EUE1-PL0W-1230	645.48
						1 Power Receptacle, 3 USB Charging, 1 Cable Bay	J, K	EUE1-PL0W-1302	705.48
						1 Power Receptacle, 3 USB Charging, 2 Data Ports	J, K	EUE1-PL0W-1320	705.48
						2 Power Receptacles, 2 Data Ports, 1 Cable Bay	J, K	EUE1-PL0W-2022	525.48
						2 Power Receptacles, 4 Data Ports	J, K	EUE1-PL0W-2040	525.48
						2 Power Receptacles, 1 USB Charging, 1 Data Port, 1 Cable Bay	J, K	EUE1-PL0W-2112	585.48
						2 Power Receptacles, 1 USB Charging, 3 Data Ports	J, K	EUE1-PL0W-2130	585.48
						2 Power Receptacles, 2 USB Charging, 1 Cable Bay	J, K	EUE1-PL0W-2202	645.48
						2 Power Receptacles, 2 USB Charging, 2 Data Ports	J, K	EUE1-PL0W-2220	645.48
						2 Power Receptacles, 3 USB Charging, 1 Data Port	J, K	EUE1-PL0W-2310	705.48
						2 Power Receptacles, 4 USB Charging	J, K	EUE1-PL0W-2400	765.48
						3 Power Receptacles, 1 Data Port, 1 Cable Bay	J, K	EUE1-PL0W-3012	525.48
						3 Power Receptacles, 3 Data Ports	J, K	EUE1-PL0W-3030	525.48
						3 Power Receptacles, 1 USB Charging, 1 Cable Bay	J, K	EUE1-PL0W-3102	585.48
						3 Power Receptacles, 1 USB Charging, 2 Data Ports	J, K	EUE1-PL0W-3120	585.48
						3 Power Receptacles, 2 USB Charging, 1 Data Port	J, K	EUE1-PL0W-3210	645.48
						3 Power Receptacles, 3 USB Charging	J, K	EUE1-PL0W-3300	705.48
						4 Power Receptacles, 1 Cable Bay	J, K	EUE1-PL0W-4002	525.48
						4 Power Receptacles, 2 Data Ports	J, K	EUE1-PL0W-4020	525.48
						4 Power Receptacles, 1 USB Charging, 1 Data Port	J, K	EUE1-PL0W-4110	585.48
						4 Power Receptacles, 2 USB Charging	J, K	EUE1-PL0W-4200	645.48
						5 Power Receptacles, 1 Data Port	J, K	EUE1-PL0W-5010	525.48
						5 Power Receptacles, 1 USB Charging	J, K	EUE1-PL0W-5100	585.48
						6 Power Receptacles	J, K	EUE1-PL0W-6000	525.48


This page intentionally blank

Flip Top Unit

Corded — Double-Sided

4-Port:


- (2) Power
- (1) USB
- (1) Data

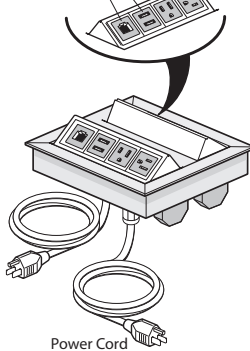

Power Cord
EUE2-PF0B-2110

6-Port:


- (2) Power
- (1) USB
- (1) Data
- (1) Cable Bay

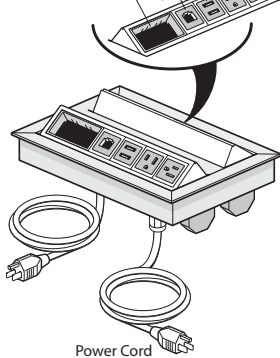

Power Cord
EUE2-PF0B-1212

4-Port:

- (4) Power

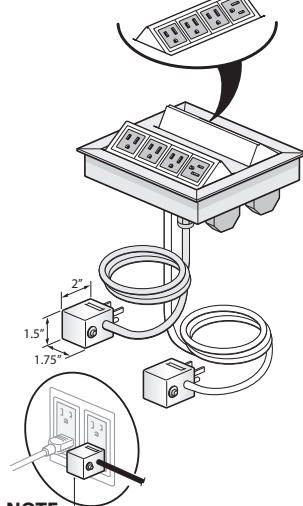

NOTE:
Always Fused Plug
when more than 3
power outlets specified.
EUE2-PF0B-4000



Features

- Includes frame and two flip top modules, each flip top module with 2, 4 or 6 ports that can be configured with simplex outlets (NEMA-5-15R), USB charging simplex (with two USB outlets), data jack adapters or cable bay(s) that can accept up to 2 pull out data/AV cables and mounting hardware.
- Data jack adapters accommodate most varieties of field supplied data jacks or separately specified AV cables.
- Each Cable Bay can accept up to 2 pull out data/AV cables.
- Each flip top module within the frame provided with 15 amp - 6' (1829mm) or 12' (3658mm) long cord with plug (NEMA5-15P).
- USB Charging Port consists of 2 USB outlets. 1,000mA of charging power per USB outlet.
- Flip top unit is flush mounted with spring release flip module.
- Flip top unit overall height is 2 3/4" (70mm) and will extend below the table tops.
- Color option of black anodized housing with black receptacles or clear anodized housing with white receptacles.
- Ships assembled.

Specification Tips

- For use with 120 volt 60 hertz power source only.
- Requires field installation.
- Specify factory cut hole or field cut hole as required.
- Specify AV cables separately.
- Cable Bay requires cables less than 0.3" (7.6mm) diameter.
- Configuration and quantity of power and data ports cannot be modified in the field.
- Application may require approval of local authority having jurisdiction (AHJ); ensure compliance before placing orders and installation.
- Corded flip top units with four receptacles utilize a fused plug that may block adjacent building receptacle outlet.

Note: Two cord feeds are provided from the double-sided flip top unit.

To Order, Specify:

- 1) Product number.
(No finish specification required.)

Note: Order flip top units to match flip top unit cutout option specified for each top (M/P or Q/V).

Flip Top Unit

Corded — Double-Sided

Width	Bezel Depth	Cord Length	Trim Color	Port Color	Port	Configuration	Flip Top Unit	Code	Price
							Cutout	Options	
5 5/16" (135mm)	4 3/8" (111mm)	6' (1829mm)	Black Anodized	Black	4	1 Power Receptacle, 1 Data Port, 1 Cable Bay	M, P	EUE2-PF0B-1012	\$1112.17
						1 Power Receptacle, 3 Data Ports	M, P	EUE2-PF0B-1030	1112.17
						1 Power Receptacle, 1 USB Charging, 1 Cable Bay	M, P	EUE2-PF0B-1102	1172.17
						1 Power Receptacle, 1 USB Charging, 2 Data Ports	M, P	EUE2-PF0B-1120	1172.17
						1 Power Receptacle, 3 USB Charging	M, P	EUE2-PF0B-1300	1292.17
						2 Power Receptacles, 1 Cable Bay	M, P	EUE2-PF0B-2002	1112.17
						2 Power Receptacles, 2 Data Ports	M, P	EUE2-PF0B-2020	1112.17
						2 Power Receptacles, 1 USB Charging, 1 Data Port	M, P	EUE2-PF0B-2110	1172.17
						2 Power Receptacles, 2 USB Charging	M, P	EUE2-PF0B-2200	1232.17
						3 Power Receptacles, 1 Data Port	M, P	EUE2-PF0B-3010	1112.17
						3 Power Receptacles, 1 USB Charging	M, P	EUE2-PF0B-3100	1172.17
						4 Power Receptacles	M, P	EUE2-PF0B-4000	1112.17
					6	1 Power Receptacle, 3 Data Ports, 1 Cable Bay	Q, V	EUE2-PF0B-1032	\$1112.17
						1 Power Receptacle, 5 Data Ports	Q, V	EUE2-PF0B-1050	1112.17
						1 Power Receptacle, 1 USB Charging, 2 Data Ports, 1 Cable Bay	Q, V	EUE2-PF0B-1122	1172.17
						1 Power Receptacle, 1 USB Charging, 4 Data Ports	Q, V	EUE2-PF0B-1140	1172.17
						1 Power Receptacle, 2 USB Charging, 1 Data Port, 1 Cable Bay	Q, V	EUE2-PF0B-1212	1232.17
						1 Power Receptacle, 2 USB Charging, 3 Data Ports	Q, V	EUE2-PF0B-1230	1232.17
						1 Power Receptacle, 3 USB Charging, 2 Cable Bays	Q, V	EUE2-PF0B-1302	1292.17
						1 Power Receptacle, 3 USB Charging, 2 Data Ports	Q, V	EUE2-PF0B-1320	1292.17
						2 Power Receptacles, 2 Data Ports, 2 Cable Bays	Q, V	EUE2-PF0B-2022	1112.17
						2 Power Receptacles, 4 Data Ports	Q, V	EUE2-PF0B-2040	1112.17
						2 Power Receptacles, 1 USB Charging, 1 Data Port, 2 Cable Bays	Q, V	EUE2-PF0B-2112	1172.17
						2 Power Receptacles, 1 USB Charging, 3 Data Ports	Q, V	EUE2-PF0B-2130	1172.17
						2 Power Receptacles, 2 USB Charging, 2 Cable Bays	Q, V	EUE2-PF0B-2202	1232.17
						2 Power Receptacles, 2 USB Charging, 2 Data Ports	Q, V	EUE2-PF0B-2220	1232.17
						2 Power Receptacles, 3 USB Charging, 1 Data Port	Q, V	EUE2-PF0B-2310	1292.17
						2 Power Receptacles, 4 USB Charging	Q, V	EUE2-PF0B-2400	1352.17
						3 Power Receptacles, 1 Data Port, 2 Cable Bays	Q, V	EUE2-PF0B-3012	1112.17
						3 Power Receptacles, 3 Data Ports	Q, V	EUE2-PF0B-3030	1112.17
						3 Power Receptacles, 1 USB Charging, 2 Cable Bays	Q, V	EUE2-PF0B-3102	1172.17
						3 Power Receptacles, 1 USB Charging, 2 Data Ports	Q, V	EUE2-PF0B-3120	1172.17
						3 Power Receptacles, 2 USB Charging, 1 Data Port	Q, V	EUE2-PF0B-3210	1232.17
						3 Power Receptacles, 3 USB Charging	Q, V	EUE2-PF0B-3300	1292.17
4 Power Receptacles, 2 Cable Bays	Q, V	EUE2-PF0B-4002	1112.17						
4 Power Receptacles, 2 Data Ports	Q, V	EUE2-PF0B-4020	1112.17						
4 Power Receptacles, 1 USB Charging, 1 Data Port	Q, V	EUE2-PF0B-4110	1172.17						
4 Power Receptacles, 2 USB Charging	Q, V	EUE2-PF0B-4200	1232.17						
5 Power Receptacles, 1 Data Port	Q, V	EUE2-PF0B-5010	1112.17						
5 Power Receptacles, 1 USB Charging	Q, V	EUE2-PF0B-5100	1172.17						
6 Power Receptacles	Q, V	EUE2-PF0B-6000	1112.17						

Flip Top Unit

Corded — Double-Sided

Width	Bezel Depth	Cord Length	Trim Color	Port Color	Port	Configuration	Flip Top Unit Cutout Code Options	Number	Price
5 5/16" (135mm)	4 3/8" (111mm)	6' (1829mm)	Clear Anodized	White	4	1 Power Receptacle, 1 Data Port, 1 Cable Bay	M, P	EUE2-PF0W-1012	\$ 949.93
						1 Power Receptacle, 3 Data Ports	M, P	EUE2-PF0W-1030	949.93
						1 Power Receptacle, 1 USB Charging, 1 Cable Bay	M, P	EUE2-PF0W-1102	1009.93
						1 Power Receptacle, 1 USB Charging, 2 Data Ports	M, P	EUE2-PF0W-1120	1009.93
						1 Power Receptacle, 3 USB Charging	M, P	EUE2-PF0W-1300	1129.93
						2 Power Receptacles, 1 Cable Bay	M, P	EUE2-PF0W-2002	949.93
						2 Power Receptacles, 2 Data Ports	M, P	EUE2-PF0W-2020	949.93
						2 Power Receptacles, 1 USB Charging, 1 Data Port	M, P	EUE2-PF0W-2110	1009.93
						2 Power Receptacles, 2 USB Charging	M, P	EUE2-PF0W-2200	1069.93
						3 Power Receptacles, 1 Data Port	M, P	EUE2-PF0W-3010	949.93
						3 Power Receptacles, 1 USB Charging	M, P	EUE2-PF0W-3100	1009.93
						4 Power Receptacles	M, P	EUE2-PF0W-4000	949.93
					6	1 Power Receptacle, 3 Data Ports, 1 Cable Bay	Q, V	EUE2-PF0W-1032	\$ 949.93
						1 Power Receptacle, 5 Data Ports	Q, V	EUE2-PF0W-1050	949.93
						1 Power Receptacle, 1 USB Charging, 2 Data Ports, 1 Cable Bay	Q, V	EUE2-PF0W-1122	1009.93
						1 Power Receptacle, 1 USB Charging, 4 Data Ports	Q, V	EUE2-PF0W-1140	1009.93
						1 Power Receptacle, 2 USB Charging, 1 Data Port, 1 Cable Bay	Q, V	EUE2-PF0W-1212	1069.93
						1 Power Receptacle, 2 USB Charging, 3 Data Ports	Q, V	EUE2-PF0W-1230	1069.93
						1 Power Receptacle, 3 USB Charging, 1 Cable Bay	Q, V	EUE2-PF0W-1302	1129.93
						1 Power Receptacle, 3 USB Charging, 2 Data Ports	Q, V	EUE2-PF0W-1320	1129.93
						2 Power Receptacles, 2 Data Ports, 1 Cable Bay	Q, V	EUE2-PF0W-2022	949.93
						2 Power Receptacles, 4 Data Ports	Q, V	EUE2-PF0W-2040	949.93
						2 Power Receptacles, 1 USB Charging, 1 Data Port, 1 Cable Bay	Q, V	EUE2-PF0W-2112	1009.93
						2 Power Receptacles, 1 USB Charging, 3 Data Ports	Q, V	EUE2-PF0W-2130	1009.93
						2 Power Receptacles, 2 USB Charging, 1 Cable Bay	Q, V	EUE2-PF0W-2202	1069.93
						2 Power Receptacles, 2 USB Charging, 2 Data Ports	Q, V	EUE2-PF0W-2220	1069.93
						2 Power Receptacles, 3 USB Charging, 1 Data Port	Q, V	EUE2-PF0W-2310	1129.93
						2 Power Receptacles, 4 USB Charging	Q, V	EUE2-PF0W-2400	1189.93
						3 Power Receptacles, 1 Data Port, 1 Cable Bay	Q, V	EUE2-PF0W-3012	949.93
						3 Power Receptacles, 3 Data Ports	Q, V	EUE2-PF0W-3030	949.93
						3 Power Receptacles, 1 USB Charging, 1 Cable Bay	Q, V	EUE2-PF0W-3102	1009.93
						3 Power Receptacles, 1 USB Charging, 2 Data Ports	Q, V	EUE2-PF0W-3120	1009.93
						3 Power Receptacles, 2 USB Charging, 1 Data Port	Q, V	EUE2-PF0W-3210	1069.93
						3 Power Receptacles, 3 USB Charging	Q, V	EUE2-PF0W-3300	1129.93
						4 Power Receptacles, 1 Cable Bay	Q, V	EUE2-PF0W-4002	949.93
						4 Power Receptacles, 2 Data Ports	Q, V	EUE2-PF0W-4020	949.93
						4 Power Receptacles, 1 USB Charging, 1 Data Port	Q, V	EUE2-PF0W-4110	1009.93
						4 Power Receptacles, 2 USB Charging	Q, V	EUE2-PF0W-4200	1069.93
						5 Power Receptacles, 1 Data Port	Q, V	EUE2-PF0W-5010	949.93
						5 Power Receptacles, 1 USB Charging	Q, V	EUE2-PF0W-5100	1009.93
						6 Power Receptacles	Q, V	EUE2-PF0W-6000	949.93

Flip Top Unit

Corded — Double-Sided

Width	Bezel Depth	Cord Length	Trim Color	Port Color	Port	Configuration	Flip Top Unit Cutout Code Options	Number	Price
5 5/16" (135mm)	4 3/8" (111mm)	12' (3658mm)	Black Anodized	Black	4	1 Power Receptacle, 1 Data Port, 1 Cable Bay	M, P	EUE2-PL0B-1012	\$1161.19
						1 Power Receptacle, 3 Data Ports	M, P	EUE2-PL0B-1030	1161.19
						1 Power Receptacle, 1 USB Charging, 1 Cable Bay	M, P	EUE2-PL0B-1102	1221.19
						1 Power Receptacle, 1 USB Charging, 2 Data Ports	M, P	EUE2-PL0B-1120	1221.19
						1 Power Receptacle, 3 USB Charging	M, P	EUE2-PL0B-1300	1341.19
						2 Power Receptacles, 1 Cable Bay	M, P	EUE2-PL0B-2002	1161.19
						2 Power Receptacles, 2 Data Ports	M, P	EUE2-PL0B-2020	1161.19
						2 Power Receptacles, 1 USB Charging, 1 Data Port	M, P	EUE2-PL0B-2110	1221.19
						2 Power Receptacles, 2 USB Charging	M, P	EUE2-PL0B-2200	1281.19
						3 Power Receptacles, 1 Data Port	M, P	EUE2-PL0B-3010	1161.19
						3 Power Receptacles, 1 USB Charging	M, P	EUE2-PL0B-3100	1221.19
						4 Power Receptacles	M, P	EUE2-PL0B-4000	1161.19
					6	1 Power Receptacle, 3 Data Ports, 1 Cable Bay	Q, V	EUE2-PL0B-1032	\$1161.19
						1 Power Receptacle, 5 Data Ports	Q, V	EUE2-PL0B-1050	1161.19
						1 Power Receptacle, 1 USB Charging, 2 Data Ports, 1 Cable Bay	Q, V	EUE2-PL0B-1122	1221.19
						1 Power Receptacle, 1 USB Charging, 4 Data Ports	Q, V	EUE2-PL0B-1140	1221.19
						1 Power Receptacle, 2 USB Charging, 1 Data Port, 1 Cable Bay	Q, V	EUE2-PL0B-1212	1281.19
						1 Power Receptacle, 2 USB Charging, 3 Data Ports	Q, V	EUE2-PL0B-1230	1281.19
						1 Power Receptacle, 3 USB Charging, 1 Cable Bay	Q, V	EUE2-PL0B-1302	1341.19
						1 Power Receptacle, 3 USB Charging, 2 Data Ports	Q, V	EUE2-PL0B-1320	1341.19
						2 Power Receptacles, 2 Data Ports, 1 Cable Bay	Q, V	EUE2-PL0B-2022	1161.19
						2 Power Receptacles, 4 Data Ports	Q, V	EUE2-PL0B-2040	1161.19
						2 Power Receptacles, 1 USB Charging, 1 Data Port, 1 Cable Bay	Q, V	EUE2-PL0B-2112	1221.19
						2 Power Receptacles, 1 USB Charging, 3 Data Ports	Q, V	EUE2-PL0B-2130	1221.19
						2 Power Receptacles, 2 USB Charging, 1 Cable Bay	Q, V	EUE2-PL0B-2202	1281.19
						2 Power Receptacles, 2 USB Charging, 2 Data Ports	Q, V	EUE2-PL0B-2220	1281.19
						2 Power Receptacles, 3 USB Charging, 1 Data Port	Q, V	EUE2-PL0B-2310	1341.19
						2 Power Receptacles, 4 USB Charging	Q, V	EUE2-PL0B-2400	1401.19
						3 Power Receptacles, 1 Data Port, 1 Cable Bay	Q, V	EUE2-PL0B-3012	1161.19
						3 Power Receptacles, 3 Data Ports	Q, V	EUE2-PL0B-3030	1161.19
						3 Power Receptacles, 1 USB Charging, 1 Cable Bay	Q, V	EUE2-PL0B-3102	1221.19
						3 Power Receptacles, 1 USB Charging, 2 Data Ports	Q, V	EUE2-PL0B-3120	1221.19
						3 Power Receptacles, 2 USB Charging, 1 Data Port	Q, V	EUE2-PL0B-3210	1281.19
						3 Power Receptacles, 3 USB Charging	Q, V	EUE2-PL0B-3300	1341.19
						4 Power Receptacles, 1 Cable Bay	Q, V	EUE2-PL0B-4002	1161.19
						4 Power Receptacles, 2 Data Ports	Q, V	EUE2-PL0B-4020	1161.19
						4 Power Receptacles, 1 USB Charging, 1 Data Port	Q, V	EUE2-PL0B-4110	1221.19
						4 Power Receptacles, 2 USB Charging	Q, V	EUE2-PL0B-4200	1281.19
						5 Power Receptacles, 1 Data Port	Q, V	EUE2-PL0B-5010	1161.19
						5 Power Receptacles, 1 USB Charging	Q, V	EUE2-PL0B-5100	1221.19
						6 Power Receptacles	Q, V	EUE2-PL0B-6000	1161.19

Flip Top Unit

Corded — Double-Sided


Width	Bezel Depth	Cord Length	Trim Color	Port Color	Port	Configuration	Flip Top Unit Cutout Code Options	Number	Price
5 5/16" (135mm)	4 3/8" (111mm)	12' (3658mm)	Clear Anodized	White	4	1 Power Receptacle, 1 Data Port, 1 Cable Bay	M, P	EUE2-PL0W-1012	\$ 998.95
						1 Power Receptacle, 3 Data Ports	M, P	EUE2-PL0W-1030	998.95
						1 Power Receptacle, 1 USB Charging, 1 Cable Bay	M, P	EUE2-PL0W-1102	1058.95
						1 Power Receptacle, 1 USB Charging, 2 Data Ports	M, P	EUE2-PL0W-1120	1058.95
						1 Power Receptacle, 3 USB Charging	M, P	EUE2-PL0W-1300	1178.95
						2 Power Receptacles, 1 Cable Bay	M, P	EUE2-PL0W-2002	998.95
						2 Power Receptacles, 2 Data Ports	M, P	EUE2-PL0W-2020	998.95
						2 Power Receptacles, 1 USB Charging, 1 Data Port	M, P	EUE2-PL0W-2110	1058.95
						2 Power Receptacles, 2 USB Charging	M, P	EUE2-PL0W-2200	1118.95
						3 Power Receptacles, 1 Data Port	M, P	EUE2-PL0W-3010	998.95
						3 Power Receptacles, 1 USB Charging	M, P	EUE2-PL0W-3100	1058.95
						4 Power Receptacles	M, P	EUE2-PL0W-4000	998.95
					6	1 Power Receptacle, 3 Data Ports, 1 Cable Bay	Q, V	EUE2-PL0W-1032	\$ 998.95
						1 Power Receptacle, 5 Data Ports	Q, V	EUE2-PL0W-1050	998.95
						1 Power Receptacle, 1 USB Charging, 2 Data Ports, 1 Cable Bay	Q, V	EUE2-PL0W-1122	1058.95
						1 Power Receptacle, 1 USB Charging, 4 Data Ports	Q, V	EUE2-PL0W-1140	1058.95
						1 Power Receptacle, 2 USB Charging, 1 Data Port, 1 Cable Bay	Q, V	EUE2-PL0W-1212	1118.95
						1 Power Receptacle, 2 USB Charging, 3 Data Ports	Q, V	EUE2-PL0W-1230	1118.95
						1 Power Receptacle, 3 USB Charging, 1 Cable Bay	Q, V	EUE2-PL0W-1302	1178.95
						1 Power Receptacle, 3 USB Charging, 2 Data Ports	Q, V	EUE2-PL0W-1320	1178.95
						2 Power Receptacles, 2 Data Ports, 1 Cable Bay	Q, V	EUE2-PL0W-2022	998.95
						2 Power Receptacles, 4 Data Ports	Q, V	EUE2-PL0W-2040	998.95
						2 Power Receptacles, 1 USB Charging, 1 Data Port, 1 Cable Bay	Q, V	EUE2-PL0W-2112	1058.95
						2 Power Receptacles, 1 USB Charging, 3 Data Ports	Q, V	EUE2-PL0W-2130	1058.95
						2 Power Receptacles, 2 USB Charging, 1 Cable Bay	Q, V	EUE2-PL0W-2202	1118.95
						2 Power Receptacles, 2 USB Charging, 2 Data Ports	Q, V	EUE2-PL0W-2220	1118.95
						2 Power Receptacles, 3 USB Charging, 1 Data Port	Q, V	EUE2-PL0W-2310	1178.95
						2 Power Receptacles, 4 USB Charging	Q, V	EUE2-PL0W-2400	1238.95
						3 Power Receptacles, 1 Data Port, 1 Cable Bay	Q, V	EUE2-PL0W-3012	998.95
						3 Power Receptacles, 3 Data Ports	Q, V	EUE2-PL0W-3030	998.95
						3 Power Receptacles, 1 USB Charging, 1 Cable Bay	Q, V	EUE2-PL0W-3102	1058.95
						3 Power Receptacles, 1 USB Charging, 2 Data Ports	Q, V	EUE2-PL0W-3120	1058.95
						3 Power Receptacles, 2 USB Charging, 1 Data Port	Q, V	EUE2-PL0W-3210	1118.95
						3 Power Receptacles, 3 USB Charging	Q, V	EUE2-PL0W-3300	1178.95
						4 Power Receptacles, 1 Cable Bay	Q, V	EUE2-PL0W-4002	998.95
						4 Power Receptacles, 2 Data Ports	Q, V	EUE2-PL0W-4020	998.95
						4 Power Receptacles, 1 USB Charging, 1 Data Port	Q, V	EUE2-PL0W-4110	1058.95
						4 Power Receptacles, 2 USB Charging	Q, V	EUE2-PL0W-4200	1118.95
						5 Power Receptacles, 1 Data Port	Q, V	EUE2-PL0W-5010	998.95
						5 Power Receptacles, 1 USB Charging	Q, V	EUE2-PL0W-5100	1058.95
						6 Power Receptacles	Q, V	EUE2-PL0W-6000	998.95

Flip Top Unit

Hardwire — Single-Sided

4-Port:

- (2) Power
- (1) USB
- (1) Data




Hard Wired

EUE1-HF0B-2110

6-Port:

- (2) Power
- (1) USB
- (1) Data
- (1) Cable Bay

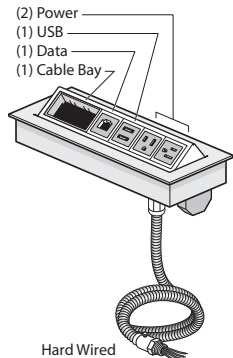

Hard Wired

EUE1-HF0B-1212



Features

- Includes bezel and flip top module with 2, 4 or 6 ports that can be configured with simplex outlets (NEMA-5-15R), USB charging simplex (with two USB outlets), data jack adapters or cable bay(s) that can accept up to 2 pull out data/AV cables and mounting hardware.
- Data jack adapters accommodate most varieties of field supplied data jacks or separately specified AV cables.
- Each Cable Bay can accept up to 2 pull out data/AV cables.
- Hardwired power module with 6'(1829mm) or 12'(3658mm) long flexible metal conduit feed, 1/2"(13mm) conduit fitting and wires for hardwire connection.
- USB Charging Port consists of 2 USB outlets. 1,000mA of charging power per USB outlet.
- Flip top unit is flush mounted with spring release flip module(s).
- Flip top unit overall height is 2 3/4"(70mm) and will extend below the table tops.
- Color option of black anodized housing with black receptacles or clear anodized housing with white receptacles.

Specification Tips

- For use with 120 volt 60 hertz power source only.
- Requires field installation.
- Specify factory cut hole or field cut hole as required.
- Specify AV cables separately.
- Cable Bay requires cables less than 0.3"(7.6mm) diameter.
- Configuration and quantity of power and data ports cannot be modified in the field.
- Application may require approval of local authority having jurisdiction (AHJ); ensure compliance before placing orders and installation.

To Order, Specify:

- 1) Product number.
(No finish specification required.)

Note: Order flip top units to match flip top unit cutout option specified for each top (A/B, F/V or J/K).

Flip Top Unit

Hardwire — Single-Sided

Width	Bezel Depth	Cord Length	Trim Color	Port Color	Port	Configuration	Flip Top Unit Cutout Code Options	Number	Price
5 5/16" (135mm)	4 3/8" (111mm)	6' (1829mm)	Black Anodized	Black	2	1 Power Receptacle, 1 Data Port	A, B	EUE1-HF0B-1010	\$705.54
						1 Power Receptacle, 1 USB Charging	A, B	EUE1-HF0B-1100	765.54
						2 Power Receptacles	A, B	EUE1-HF0B-2000	705.54
					4	1 Power Receptacle, 1 Data Port, 1 Cable Bay	F, V	EUE1-HF0B-1012	\$705.54
						1 Power Receptacle, 3 Data Ports	F, V	EUE1-HF0B-1030	705.54
						1 Power Receptacle, 1 USB Charging, 1 Cable Bay	F, V	EUE1-HF0B-1102	765.54
						1 Power Receptacle, 1 USB Charging, 2 Data Ports	F, V	EUE1-HF0B-1120	765.54
						1 Power Receptacle, 3 USB Charging	F, V	EUE1-HF0B-1300	885.54
						2 Power Receptacles, 1 Cable Bay	F, V	EUE1-HF0B-2002	705.54
						2 Power Receptacles, 2 Data Ports	F, V	EUE1-HF0B-2020	705.54
						2 Power Receptacles, 1 USB Charging, 1 Data Port	F, V	EUE1-HF0B-2110	765.54
						2 Power Receptacles, 2 USB Charging	F, V	EUE1-HF0B-2200	825.54
						3 Power Receptacles, 1 Data Port	F, V	EUE1-HF0B-3010	705.54
						3 Power Receptacles, 1 USB Charging	F, V	EUE1-HF0B-3100	765.54
						4 Power Receptacles	F, V	EUE1-HF0B-4000	705.54
					6	1 Power Receptacle, 3 Data Ports, 1 Cable Bay	J, K	EUE1-HF0B-1032	\$705.54
						1 Power Receptacle, 5 Data Ports	J, K	EUE1-HF0B-1050	705.54
						1 Power Receptacle, 1 USB Charging, 2 Data Ports, 1 Cable Bay	J, K	EUE1-HF0B-1122	765.54
						1 Power Receptacle, 1 USB Charging, 4 Data Ports	J, K	EUE1-HF0B-1140	765.54
						1 Power Receptacle, 2 USB Charging, 1 Data Port, 1 Cable Bay	J, K	EUE1-HF0B-1212	825.54
						1 Power Receptacle, 2 USB Charging, 3 Data Ports	J, K	EUE1-HF0B-1230	825.54
						1 Power Receptacle, 3 USB Charging, 1 Cable Bay	J, K	EUE1-HF0B-1302	885.54
						1 Power Receptacle, 3 USB Charging, 2 Data Ports	J, K	EUE1-HF0B-1320	885.54
						2 Power Receptacles, 2 Data Ports, 1 Cable Bay	J, K	EUE1-HF0B-2022	705.54
						2 Power Receptacles, 4 Data Ports	J, K	EUE1-HF0B-2040	705.54
						2 Power Receptacles, 1 USB Charging, 1 Data Port, 1 Cable Bay	J, K	EUE1-HF0B-2112	765.54
						2 Power Receptacles, 1 USB Charging, 3 Data Ports	J, K	EUE1-HF0B-2130	765.54
						2 Power Receptacles, 2 USB Charging, 1 Cable Bay	J, K	EUE1-HF0B-2202	825.54
						2 Power Receptacles, 2 USB Charging, 2 Data Ports	J, K	EUE1-HF0B-2220	825.54
						2 Power Receptacles, 3 USB Charging, 1 Data Port	J, K	EUE1-HF0B-2310	885.54
						2 Power Receptacles, 4 USB Charging	J, K	EUE1-HF0B-2400	945.54
						3 Power Receptacles, 1 Data Port, 1 Cable Bay	J, K	EUE1-HF0B-3012	705.54
						3 Power Receptacles, 3 Data Ports	J, K	EUE1-HF0B-3030	705.54
						3 Power Receptacles, 1 USB Charging, 1 Cable Bay	J, K	EUE1-HF0B-3102	765.54
						3 Power Receptacles, 1 USB Charging, 2 Data Ports	J, K	EUE1-HF0B-3120	765.54
						3 Power Receptacles, 2 USB Charging, 1 Data Port	J, K	EUE1-HF0B-3210	825.54
						3 Power Receptacles, 3 USB Charging	J, K	EUE1-HF0B-3300	885.54
						4 Power Receptacles, 1 Cable Bay	J, K	EUE1-HF0B-4002	705.54
						4 Power Receptacles, 2 Data Ports	J, K	EUE1-HF0B-4020	705.54
						4 Power Receptacles, 1 USB Charging, 1 Data Port	J, K	EUE1-HF0B-4110	765.54
						4 Power Receptacles, 2 USB Charging	J, K	EUE1-HF0B-4200	825.54
						5 Power Receptacles, 1 Data Port	J, K	EUE1-HF0B-5010	705.54
						5 Power Receptacles, 1 USB Charging	J, K	EUE1-HF0B-5100	765.54
						6 Power Receptacles	J, K	EUE1-HF0B-6000	705.54

Flip Top Unit

Hardwire — Single-Sided

Width	Bezel Depth	Cord Length	Trim Color	Port Color	Port	Configuration	Flip Top Unit Cutout Code Options	Number	Price
5 5/16" (135mm)	4 3/8" (111mm)	6' (1829mm)	Clear Anodized	White	2	1 Power Receptacle, 1 Data Port	A, B	EUE1-HF0W-1010	\$543.30
						1 Power Receptacle, 1 USB Charging	A, B	EUE1-HF0W-1100	603.30
						2 Power Receptacles	A, B	EUE1-HF0W-2000	543.30
					4	1 Power Receptacle, 1 Data Port, 1 Cable Bay	F, V	EUE1-HF0W-1012	\$543.30
						1 Power Receptacle, 3 Data Ports	F, V	EUE1-HF0W-1030	543.30
						1 Power Receptacle, 1 USB Charging, 1 Cable Bay	F, V	EUE1-HF0W-1102	603.30
						1 Power Receptacle, 1 USB Charging, 2 Data Ports	F, V	EUE1-HF0W-1120	603.30
						1 Power Receptacle, 3 USB Charging	F, V	EUE1-HF0W-1300	723.30
						2 Power Receptacles, 1 Cable Bay	F, V	EUE1-HF0W-2002	543.30
						2 Power Receptacles, 2 Data Ports	F, V	EUE1-HF0W-2020	543.30
						2 Power Receptacles, 1 USB Charging, 1 Data Port	F, V	EUE1-HF0W-2110	603.30
						2 Power Receptacles, 2 USB Charging	F, V	EUE1-HF0W-2200	663.30
						3 Power Receptacles, 1 Data Port	F, V	EUE1-HF0W-3010	543.30
						3 Power Receptacles, 1 USB Charging	F, V	EUE1-HF0W-3100	603.30
						4 Power Receptacles	F, V	EUE1-HF0W-4000	543.30
					6	1 Power Receptacle, 3 Data Ports, 1 Cable Bay	J, K	EUE1-HF0W-1032	\$543.30
						1 Power Receptacle, 5 Data Ports	J, K	EUE1-HF0W-1050	543.30
						1 Power Receptacle, 1 USB Charging, 2 Data Ports, 1 Cable Bay	J, K	EUE1-HF0W-1122	603.30
						1 Power Receptacle, 1 USB Charging, 4 Data Ports	J, K	EUE1-HF0W-1140	603.30
						1 Power Receptacle, 2 USB Charging, 1 Data Port, 1 Cable Bay	J, K	EUE1-HF0W-1212	663.30
						1 Power Receptacle, 2 USB Charging, 3 Data Ports	J, K	EUE1-HF0W-1230	663.30
						1 Power Receptacle, 3 USB Charging, 1 Cable Bay	J, K	EUE1-HF0W-1302	723.30
						1 Power Receptacle, 3 USB Charging, 2 Data Ports	J, K	EUE1-HF0W-1320	723.30
						2 Power Receptacles, 2 Data Ports, 1 Cable Bay	J, K	EUE1-HF0W-2022	543.30
						2 Power Receptacles, 4 Data Ports	J, K	EUE1-HF0W-2040	543.30
						2 Power Receptacles, 1 USB Charging, 1 Data Port, 1 Cable Bay	J, K	EUE1-HF0W-2112	603.30
						2 Power Receptacles, 1 USB Charging, 3 Data Ports	J, K	EUE1-HF0W-2130	603.30
						2 Power Receptacles, 2 USB Charging, 1 Cable Bay	J, K	EUE1-HF0W-2202	663.30
						2 Power Receptacles, 2 USB Charging, 2 Data Ports	J, K	EUE1-HF0W-2220	663.30
						2 Power Receptacles, 3 USB Charging, 1 Data Port	J, K	EUE1-HF0W-2310	723.30
						2 Power Receptacles, 4 USB Charging	J, K	EUE1-HF0W-2400	783.30
						3 Power Receptacles, 1 Data Port, 1 Cable Bay	J, K	EUE1-HF0W-3012	543.30
						3 Power Receptacles, 3 Data Ports	J, K	EUE1-HF0W-3030	543.30
						3 Power Receptacles, 1 USB Charging, 1 Cable Bay	J, K	EUE1-HF0W-3102	603.30
						3 Power Receptacles, 1 USB Charging, 2 Data Ports	J, K	EUE1-HF0W-3120	603.30
						3 Power Receptacles, 2 USB Charging, 1 Data Port	J, K	EUE1-HF0W-3210	663.30
						3 Power Receptacles, 3 USB Charging	J, K	EUE1-HF0W-3300	723.30
						4 Power Receptacles, 1 Cable Bay	J, K	EUE1-HF0W-4002	543.30
						4 Power Receptacles, 2 Data Ports	J, K	EUE1-HF0W-4020	543.30
						4 Power Receptacles, 1 USB Charging, 1 Data Port	J, K	EUE1-HF0W-4110	603.30
						4 Power Receptacles, 2 USB Charging	J, K	EUE1-HF0W-4200	663.30
						5 Power Receptacles, 1 Data Port	J, K	EUE1-HF0W-5010	543.30
						5 Power Receptacles, 1 USB Charging	J, K	EUE1-HF0W-5100	603.30
						6 Power Receptacles	J, K	EUE1-HF0W-6000	543.30

Flip Top Unit

Hardwire — Single-Sided

Width	Bezel Depth	Cord Length	Trim Color	Port Color	Port	Configuration	Flip Top Unit Cutout Code Options	Number	Price
5 5/16" (135mm)	4 3/8" (111mm)	12' (3658mm)	Black Anodized	Black	2	1 Power Receptacle, 1 Data Port	A, B	EUE1-HL0B-1010	\$754.56
						1 Power Receptacle, 1 USB Charging	A, B	EUE1-HL0B-1100	814.56
						2 Power Receptacles	A, B	EUE1-HL0B-2000	754.56
					4	1 Power Receptacle, 1 Data Port, 1 Cable Bay	F, V	EUE1-HL0B-1012	\$754.56
						1 Power Receptacle, 3 Data Ports	F, V	EUE1-HL0B-1030	754.56
						1 Power Receptacle, 1 USB Charging, 1 Cable Bay	F, V	EUE1-HL0B-1102	814.56
						1 Power Receptacle, 1 USB Charging, 2 Data Ports	F, V	EUE1-HL0B-1120	814.56
						1 Power Receptacle, 3 USB Charging	F, V	EUE1-HL0B-1300	934.56
						2 Power Receptacles, 1 Cable Bay	F, V	EUE1-HL0B-2002	754.56
						2 Power Receptacles, 2 Data Ports	F, V	EUE1-HL0B-2020	754.56
						2 Power Receptacles, 1 USB Charging, 1 Data Port	F, V	EUE1-HL0B-2110	814.56
						2 Power Receptacles, 2 USB Charging	F, V	EUE1-HL0B-2200	874.56
						3 Power Receptacles, 1 Data Port	F, V	EUE1-HL0B-3010	754.56
						3 Power Receptacles, 1 USB Charging	F, V	EUE1-HL0B-3100	814.56
						4 Power Receptacles	F, V	EUE1-HL0B-4000	754.56
					6	1 Power Receptacle, 3 Data Ports, 1 Cable Bay	J, K	EUE1-HL0B-1032	\$754.56
						1 Power Receptacle, 5 Data Ports	J, K	EUE1-HL0B-1050	754.56
						1 Power Receptacle, 1 USB Charging, 2 Data Ports, 1 Cable Bay	J, K	EUE1-HL0B-1122	814.56
						1 Power Receptacle, 1 USB Charging, 4 Data Ports	J, K	EUE1-HL0B-1140	814.56
						1 Power Receptacle, 2 USB Charging, 1 Data Port, 1 Cable Bay	J, K	EUE1-HL0B-1212	874.56
						1 Power Receptacle, 2 USB Charging, 3 Data Ports	J, K	EUE1-HL0B-1230	874.56
						1 Power Receptacle, 3 USB Charging, 1 Cable Bay	J, K	EUE1-HL0B-1302	934.56
						1 Power Receptacle, 3 USB Charging, 2 Data Ports	J, K	EUE1-HL0B-1320	934.56
						2 Power Receptacles, 2 Data Ports, 1 Cable Bay	J, K	EUE1-HL0B-2022	754.56
						2 Power Receptacles, 4 Data Ports	J, K	EUE1-HL0B-2040	754.56
						2 Power Receptacles, 1 USB Charging, 1 Data Port, 1 Cable Bay	J, K	EUE1-HL0B-2112	814.56
						2 Power Receptacles, 1 USB Charging, 3 Data Ports	J, K	EUE1-HL0B-2130	814.56
						2 Power Receptacles, 2 USB Charging, 1 Cable Bay	J, K	EUE1-HL0B-2202	874.56
						2 Power Receptacles, 2 USB Charging, 2 Data Ports	J, K	EUE1-HL0B-2220	874.56
						2 Power Receptacles, 3 USB Charging, 1 Data Port	J, K	EUE1-HL0B-2310	934.56
						2 Power Receptacles, 4 USB Charging	J, K	EUE1-HL0B-2400	994.56
						3 Power Receptacles, 1 Data Port, 1 Cable Bay	J, K	EUE1-HL0B-3012	754.56
						3 Power Receptacles, 3 Data Ports	J, K	EUE1-HL0B-3030	754.56
						3 Power Receptacles, 1 USB Charging, 1 Cable Bay	J, K	EUE1-HL0B-3102	814.56
						3 Power Receptacles, 1 USB Charging, 2 Data Ports	J, K	EUE1-HL0B-3120	814.56
						3 Power Receptacles, 2 USB Charging, 1 Data Port	J, K	EUE1-HL0B-3210	874.56
						3 Power Receptacles, 3 USB Charging	J, K	EUE1-HL0B-3300	934.56
						4 Power Receptacles, 1 Cable Bay	J, K	EUE1-HL0B-4002	754.56
						4 Power Receptacles, 2 Data Ports	J, K	EUE1-HL0B-4020	754.56
						4 Power Receptacles, 1 USB Charging, 1 Data Port	J, K	EUE1-HL0B-4110	814.56
						4 Power Receptacles, 2 USB Charging	J, K	EUE1-HL0B-4200	874.56
						5 Power Receptacles, 1 Data Port	J, K	EUE1-HL0B-5010	754.56
						5 Power Receptacles, 1 USB Charging	J, K	EUE1-HL0B-5100	814.56
						6 Power Receptacles	J, K	EUE1-HL0B-6000	754.56

Flip Top Unit

Hardwire — Single-Sided


Width	Bezel Depth	Cord Length	Trim Color	Port Color	Port	Configuration	Flip Top Unit Cutout Code Options	Number	Price
5 5/16" (135mm)	4 3/8" (111mm)	6' (1829mm)	Clear Anodized	White	2	1 Power Receptacle, 1 Data Port	A, B	EUE1-HLOW-1010	\$592.32
						1 Power Receptacle, 1 USB Charging	A, B	EUE1-HLOW-1100	652.32
						2 Power Receptacles	A, B	EUE1-HLOW-2000	592.32
					4	1 Power Receptacle, 1 Data Port, 1 Cable Bay	F, V	EUE1-HLOW-1012	\$592.32
						1 Power Receptacle, 3 Data Ports	F, V	EUE1-HLOW-1030	592.32
						1 Power Receptacle, 1 USB Charging, 1 Cable Bay	F, V	EUE1-HLOW-1102	652.32
						1 Power Receptacle, 1 USB Charging, 2 Data Ports	F, V	EUE1-HLOW-1120	652.32
						1 Power Receptacle, 3 USB Charging	F, V	EUE1-HLOW-1300	772.32
						2 Power Receptacles, 1 Cable Bay	F, V	EUE1-HLOW-2002	592.32
						2 Power Receptacles, 2 Data Ports	F, V	EUE1-HLOW-2020	592.32
						2 Power Receptacles, 1 USB Charging, 1 Data Port	F, V	EUE1-HLOW-2110	652.32
						2 Power Receptacles, 2 USB Charging	F, V	EUE1-HLOW-2200	712.32
						3 Power Receptacles, 1 Data Port	F, V	EUE1-HLOW-3010	592.32
						3 Power Receptacles, 1 USB Charging	F, V	EUE1-HLOW-3100	652.32
						4 Power Receptacles	F, V	EUE1-HLOW-4000	592.32
					6	1 Power Receptacle, 3 Data Ports, 1 Cable Bay	J, K	EUE1-HLOW-1032	\$592.32
						1 Power Receptacle, 5 Data Ports	J, K	EUE1-HLOW-1050	592.32
						1 Power Receptacle, 1 USB Charging, 2 Data Ports, 1 Cable Bay	J, K	EUE1-HLOW-1122	652.32
						1 Power Receptacle, 1 USB Charging, 4 Data Ports	J, K	EUE1-HLOW-1140	652.32
						1 Power Receptacle, 2 USB Charging, 1 Data Port, 1 Cable Bay	J, K	EUE1-HLOW-1212	712.32
						1 Power Receptacle, 2 USB Charging, 3 Data Ports	J, K	EUE1-HLOW-1230	712.32
						1 Power Receptacle, 3 USB Charging, 1 Cable Bay	J, K	EUE1-HLOW-1302	772.32
						1 Power Receptacle, 3 USB Charging, 2 Data Ports	J, K	EUE1-HLOW-1320	772.32
						2 Power Receptacles, 2 Data Ports, 1 Cable Bay	J, K	EUE1-HLOW-2022	592.32
						2 Power Receptacles, 4 Data Ports	J, K	EUE1-HLOW-2040	592.32
						2 Power Receptacles, 1 USB Charging, 1 Data Port, 1 Cable Bay	J, K	EUE1-HLOW-2112	652.32
						2 Power Receptacles, 1 USB Charging, 3 Data Ports	J, K	EUE1-HLOW-2130	652.32
						2 Power Receptacles, 2 USB Charging, 1 Cable Bay	J, K	EUE1-HLOW-2202	712.32
						2 Power Receptacles, 2 USB Charging, 2 Data Ports	J, K	EUE1-HLOW-2220	712.32
						2 Power Receptacles, 3 USB Charging, 1 Data Port	J, K	EUE1-HLOW-2310	772.32
						2 Power Receptacles, 4 USB Charging	J, K	EUE1-HLOW-2400	832.32
						3 Power Receptacles, 1 Data Port, 1 Cable Bay	J, K	EUE1-HLOW-3012	592.32
						3 Power Receptacles, 3 Data Ports	J, K	EUE1-HLOW-3030	592.32
						3 Power Receptacles, 1 USB Charging, 1 Cable Bay	J, K	EUE1-HLOW-3102	652.32
						3 Power Receptacles, 1 USB Charging, 2 Data Ports	J, K	EUE1-HLOW-3120	652.32
						3 Power Receptacles, 2 USB Charging, 1 Data Port	J, K	EUE1-HLOW-3210	712.32
						3 Power Receptacles, 3 USB Charging	J, K	EUE1-HLOW-3300	772.32
						4 Power Receptacles, 1 Cable Bay	J, K	EUE1-HLOW-4002	592.32
						4 Power Receptacles, 2 Data Ports	J, K	EUE1-HLOW-4020	592.32
						4 Power Receptacles, 1 USB Charging, 1 Data Port	J, K	EUE1-HLOW-4110	652.32
						4 Power Receptacles, 2 USB Charging	J, K	EUE1-HLOW-4200	712.32
						5 Power Receptacles, 1 Data Port	J, K	EUE1-HLOW-5010	592.32
						5 Power Receptacles, 1 USB Charging	J, K	EUE1-HLOW-5100	652.32
						6 Power Receptacles	J, K	EUE1-HLOW-6000	592.32

This page intentionally blank

Flip Top Unit

Hardwire — Double-Sided


4-Port:

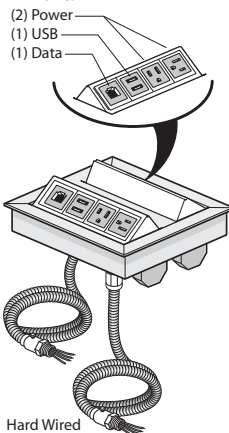

Hard Wired

EUE2-HF0B-2110

6-Port:

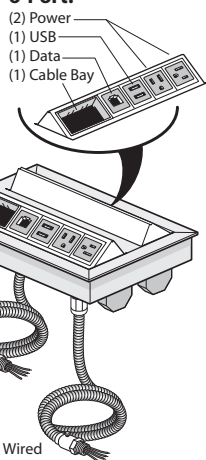

Hard Wired

EUE2-HF0B-1212



Features

- Includes frame and two flip top modules, each flip top module with 2, 4 or 6 ports that can be configured with simplex outlets (NEMA-5-15R), USB charging simplex (with two USB outlets), data jack adapters or cable bay(s) that can accept up to 2 pull out data/AV cables and mounting hardware.
- Data jack adapters accommodate most varieties of field supplied data jacks or separately specified AV cables.
- Each Cable Bay can accept up to 2 pull out data/AV cables.
- Each flip top module within the frame provided with 6'(1829mm) or 12'(3658mm) long flexible metal conduit feed, 1/2"(13mm) conduit fitting and wires for hardwire connection.
- USB Charging Port consists of 2 USB outlets. 1,000mA of charging power per USB outlet.
- Flip top frame is flush mounted with two spring release flip module(s).
- Flip top unit overall height is 2 3/4"(70mm) and will extend below the table tops.
- Color option of black anodized housing with black receptacles or clear anodized housing with white receptacles.
- Ships assembled.

Specification Tips

- Note two conduit feeds are provided from the double-sided flip top unit.
- For use with 120 volt 60 hertz power source only.
- Requires field installation.
- Specify factory cut hole or field cut hole as required.
- Specify AV cables separately.
- Cable Bay requires cables less than 0.3"(7.6mm) diameter.
- Configuration and quantity of power and data ports cannot be modified in the field.
- Application may require approval of local authority having jurisdiction (AHJ); ensure compliance before placing orders and installation.

To Order, Specify:

- 1) Product number.
(No finish specification required.)

Note: Order flip top units to match flip top unit cutout option specified for each top (M/P or Q/V).

Flip Top Unit

Hardwire — Double-Sided

Width	Bezel Depth	Cord Length	Trim Color	Port Color	Port	Configuration	Flip Top Unit Cutout Code Options	Number	Price
5 5/16" (135mm)	4 3/8" (111mm)	6' (1829mm)	Black Anodized	Black	4	1 Power Receptacle, 1 Data Port, 1 Cable Bay	M, P	EUE2-HF0B-1012	\$1245.85
						1 Power Receptacle, 3 Data Ports	M, P	EUE2-HF0B-1030	1245.85
						1 Power Receptacle, 1 USB Charging, 1 Cable Bay	M, P	EUE2-HF0B-1102	1305.85
						1 Power Receptacle, 1 USB Charging, 2 Data Ports	M, P	EUE2-HF0B-1120	1305.85
						1 Power Receptacle, 3 USB Charging	M, P	EUE2-HF0B-1300	1425.85
						2 Power Receptacles, 1 Cable Bay	M, P	EUE2-HF0B-2002	1245.85
						2 Power Receptacles, 2 Data Ports	M, P	EUE2-HF0B-2020	1245.85
						2 Power Receptacles, 1 USB Charging, 1 Data Port	M, P	EUE2-HF0B-2110	1305.85
						2 Power Receptacles, 2 USB Charging	M, P	EUE2-HF0B-2200	1365.85
						3 Power Receptacles, 1 Data Port	M, P	EUE2-HF0B-3010	1245.85
						3 Power Receptacles, 1 USB Charging	M, P	EUE2-HF0B-3100	1305.85
						4 Power Receptacles	M, P	EUE2-HF0B-4000	1245.85
					6	1 Power Receptacle, 3 Data Ports, 1 Cable Bay	Q, V	EUE2-HF0B-1032	\$1245.85
						1 Power Receptacle, 5 Data Ports	Q, V	EUE2-HF0B-1050	1245.85
						1 Power Receptacle, 1 USB Charging, 2 Data Ports, 1 Cable Bay	Q, V	EUE2-HF0B-1122	1305.85
						1 Power Receptacle, 1 USB Charging, 4 Data Ports	Q, V	EUE2-HF0B-1140	1305.85
						1 Power Receptacle, 2 USB Charging, 1 Data Port, 1 Cable Bay	Q, V	EUE2-HF0B-1212	1365.85
						1 Power Receptacle, 2 USB Charging, 3 Data Ports	Q, V	EUE2-HF0B-1230	1365.85
						1 Power Receptacle, 3 USB Charging, 1 Cable Bay	Q, V	EUE2-HF0B-1302	1425.85
						1 Power Receptacle, 3 USB Charging, 2 Data Ports	Q, V	EUE2-HF0B-1320	1425.85
						2 Power Receptacles, 2 Data Ports, 1 Cable Bay	Q, V	EUE2-HF0B-2022	1245.85
						2 Power Receptacles, 4 Data Ports	Q, V	EUE2-HF0B-2040	1245.85
						2 Power Receptacles, 1 USB Charging, 1 Data Port, 1 Cable Bay	Q, V	EUE2-HF0B-2112	1305.85
						2 Power Receptacles, 1 USB Charging, 3 Data Ports	Q, V	EUE2-HF0B-2130	1305.85
						2 Power Receptacles, 2 USB Charging, 1 Cable Bay	Q, V	EUE2-HF0B-2202	1365.85
						2 Power Receptacles, 2 USB Charging, 2 Data Ports	Q, V	EUE2-HF0B-2220	1365.85
						2 Power Receptacles, 3 USB Charging, 1 Data Port	Q, V	EUE2-HF0B-2310	1425.85
						2 Power Receptacles, 4 USB Charging	Q, V	EUE2-HF0B-2400	1485.85
						3 Power Receptacles, 1 Data Port, 1 Cable Bay	Q, V	EUE2-HF0B-3012	1245.85
						3 Power Receptacles, 3 Data Ports	Q, V	EUE2-HF0B-3030	1245.85
						3 Power Receptacles, 1 USB Charging, 1 Cable Bay	Q, V	EUE2-HF0B-3102	1305.85
						3 Power Receptacles, 1 USB Charging, 2 Data Ports	Q, V	EUE2-HF0B-3120	1305.85
						3 Power Receptacles, 2 USB Charging, 1 Data Port	Q, V	EUE2-HF0B-3210	1365.85
						3 Power Receptacles, 3 USB Charging	Q, V	EUE2-HF0B-3300	1425.85
						4 Power Receptacles, 1 Cable Bay	Q, V	EUE2-HF0B-4002	1245.85
						4 Power Receptacles, 2 Data Ports	Q, V	EUE2-HF0B-4020	1245.85
						4 Power Receptacles, 1 USB Charging, 1 Data Port	Q, V	EUE2-HF0B-4110	1305.85
						4 Power Receptacles, 2 USB Charging	Q, V	EUE2-HF0B-4200	1365.85
						5 Power Receptacles, 1 Data Port	Q, V	EUE2-HF0B-5010	1245.85
						5 Power Receptacles, 1 USB Charging	Q, V	EUE2-HF0B-5100	1305.85
						6 Power Receptacles	Q, V	EUE2-HF0B-6000	1245.85

Flip Top Unit

Hardwire — Double-Sided

Width	Bezel Depth	Cord Length	Trim Color	Port Color	Port	Configuration	Flip Top Unit Cutout Code Options	Number	Price
5 5/16" (135mm)	4 3/8" (111mm)	6' (1829mm)	Clear Anodized	White	4	1 Power Receptacle, 1 Data Port, 1 Cable Bay	M, P	EUE2-HF0W-1012	\$1083.61
						1 Power Receptacle, 3 Data Ports	M, P	EUE2-HF0W-1030	1083.61
						1 Power Receptacle, 1 USB Charging, 1 Cable Bay	M, P	EUE2-HF0W-1102	1143.61
						1 Power Receptacle, 1 USB Charging, 2 Data Ports	M, P	EUE2-HF0W-1120	1143.61
						1 Power Receptacle, 3 USB Charging	M, P	EUE2-HF0W-1300	1263.61
						2 Power Receptacles, 1 Cable Bay	M, P	EUE2-HF0W-2002	1083.61
						2 Power Receptacles, 2 Data Ports	M, P	EUE2-HF0W-2020	1083.61
						2 Power Receptacles, 1 USB Charging, 1 Data Port	M, P	EUE2-HF0W-2110	1143.61
						2 Power Receptacles, 2 USB Charging	M, P	EUE2-HF0W-2200	1203.61
						3 Power Receptacles, 1 Data Port	M, P	EUE2-HF0W-3010	1083.61
						3 Power Receptacles, 1 USB Charging	M, P	EUE2-HF0W-3100	1143.61
						4 Power Receptacles	M, P	EUE2-HF0W-4000	1083.61
					6	1 Power Receptacle, 3 Data Ports, 1 Cable Bay	Q, V	EUE2-HF0W-1032	\$1083.61
						1 Power Receptacle, 5 Data Ports	Q, V	EUE2-HF0W-1050	1083.61
						1 Power Receptacle, 1 USB Charging, 2 Data Ports, 1 Cable Bay	Q, V	EUE2-HF0W-1122	1143.61
						1 Power Receptacle, 1 USB Charging, 4 Data Ports	Q, V	EUE2-HF0W-1140	1143.61
						1 Power Receptacle, 2 USB Charging, 1 Data Port, 1 Cable Bay	Q, V	EUE2-HF0W-1212	1203.61
						1 Power Receptacle, 2 USB Charging, 3 Data Ports	Q, V	EUE2-HF0W-1230	1203.61
						1 Power Receptacle, 3 USB Charging, 1 Cable Bay	Q, V	EUE2-HF0W-1302	1263.61
						1 Power Receptacle, 3 USB Charging, 2 Data Ports	Q, V	EUE2-HF0W-1320	1263.61
						2 Power Receptacles, 2 Data Ports, 1 Cable Bay	Q, V	EUE2-HF0W-2022	1083.61
						2 Power Receptacles, 4 Data Ports	Q, V	EUE2-HF0W-2040	1083.61
						2 Power Receptacles, 1 USB Charging, 1 Data Port, 1 Cable Bay	Q, V	EUE2-HF0W-2112	1143.61
						2 Power Receptacles, 1 USB Charging, 3 Data Ports	Q, V	EUE2-HF0W-2130	1143.61
						2 Power Receptacles, 2 USB Charging, 1 Cable Bay	Q, V	EUE2-HF0W-2202	1203.61
						2 Power Receptacles, 2 USB Charging, 2 Data Ports	Q, V	EUE2-HF0W-2220	1203.61
						2 Power Receptacles, 3 USB Charging, 1 Data Port	Q, V	EUE2-HF0W-2310	1263.61
						2 Power Receptacles, 4 USB Charging	Q, V	EUE2-HF0W-2400	1323.61
						3 Power Receptacles, 1 Data Port, 1 Cable Bay	Q, V	EUE2-HF0W-3012	1083.61
						3 Power Receptacles, 3 Data Ports	Q, V	EUE2-HF0W-3030	1083.61
						3 Power Receptacles, 1 USB Charging, 1 Cable Bay	Q, V	EUE2-HF0W-3102	1143.61
						3 Power Receptacles, 1 USB Charging, 2 Data Ports	Q, V	EUE2-HF0W-3120	1143.61
						3 Power Receptacles, 2 USB Charging, 1 Data Port	Q, V	EUE2-HF0W-3210	1203.61
						3 Power Receptacles, 3 USB Charging	Q, V	EUE2-HF0W-3300	1263.61
						4 Power Receptacles, 1 Cable Bay	Q, V	EUE2-HF0W-4002	1083.61
						4 Power Receptacles, 2 Data Ports	Q, V	EUE2-HF0W-4020	1083.61
						4 Power Receptacles, 1 USB Charging, 1 Data Port	Q, V	EUE2-HF0W-4110	1143.61
						4 Power Receptacles, 2 USB Charging	Q, V	EUE2-HF0W-4200	1203.61
						5 Power Receptacles, 1 Data Port	Q, V	EUE2-HF0W-5010	1083.61
						5 Power Receptacles, 1 USB Charging	Q, V	EUE2-HF0W-5100	1143.61
						6 Power Receptacles	Q, V	EUE2-HF0W-6000	1083.61

Flip Top Unit

Hardwire — Double-Sided

Width	Bezel Depth	Cord Length	Trim Color	Port Color	Port	Configuration	Flip Top Unit Cutout Code Options	Number	Price
5 5/16" (135mm)	4 3/8" (111mm)	12' (3658mm)	Black Anodized	Black	4	1 Power Receptacle, 1 Data Port, 1 Cable Bay	M, P	EUE2-HL0B-1012	\$1294.87
						1 Power Receptacle, 3 Data Ports	M, P	EUE2-HL0B-1030	1294.87
						1 Power Receptacle, 1 USB Charging, 1 Cable Bay	M, P	EUE2-HL0B-1102	1354.87
						1 Power Receptacle, 1 USB Charging, 2 Data Ports	M, P	EUE2-HL0B-1120	1354.87
						1 Power Receptacle, 3 USB Charging	M, P	EUE2-HL0B-1300	1474.87
						2 Power Receptacles, 1 Cable Bay	M, P	EUE2-HL0B-2002	1294.87
						2 Power Receptacles, 2 Data Ports	M, P	EUE2-HL0B-2020	1294.87
						2 Power Receptacles, 1 USB Charging, 1 Data Port	M, P	EUE2-HL0B-2110	1354.87
						2 Power Receptacles, 2 USB Charging	M, P	EUE2-HL0B-2200	1414.87
						3 Power Receptacles, 1 Data Port	M, P	EUE2-HL0B-3010	1294.87
						3 Power Receptacles, 1 USB Charging	M, P	EUE2-HL0B-3100	1354.87
						4 Power Receptacles	M, P	EUE2-HL0B-4000	1294.87
					6	1 Power Receptacle, 3 Data Ports, 1 Cable Bay	Q, V	EUE2-HL0B-1032	\$1294.87
						1 Power Receptacle, 5 Data Ports	Q, V	EUE2-HL0B-1050	1294.87
						1 Power Receptacle, 1 USB Charging, 2 Data Ports, 1 Cable Bay	Q, V	EUE2-HL0B-1122	1354.87
						1 Power Receptacle, 1 USB Charging, 4 Data Ports	Q, V	EUE2-HL0B-1140	1354.87
						1 Power Receptacle, 2 USB Charging, 1 Data Port, 1 Cable Bay	Q, V	EUE2-HL0B-1212	1414.87
						1 Power Receptacle, 2 USB Charging, 3 Data Ports	Q, V	EUE2-HL0B-1230	1414.87
						1 Power Receptacle, 3 USB Charging, 1 Cable Bay	Q, V	EUE2-HL0B-1302	1474.87
						1 Power Receptacle, 3 USB Charging, 2 Data Ports	Q, V	EUE2-HL0B-1320	1474.87
						2 Power Receptacles, 2 Data Ports, 1 Cable Bay	Q, V	EUE2-HL0B-2022	1294.87
						2 Power Receptacles, 4 Data Ports	Q, V	EUE2-HL0B-2040	1294.87
						2 Power Receptacles, 1 USB Charging, 1 Data Port, 1 Cable Bay	Q, V	EUE2-HL0B-2112	1354.87
						2 Power Receptacles, 1 USB Charging, 3 Data Ports	Q, V	EUE2-HL0B-2130	1354.87
						2 Power Receptacles, 2 USB Charging, 1 Cable Bay	Q, V	EUE2-HL0B-2202	1414.87
						2 Power Receptacles, 2 USB Charging, 2 Data Ports	Q, V	EUE2-HL0B-2220	1414.87
						2 Power Receptacles, 3 USB Charging, 1 Data Port	Q, V	EUE2-HL0B-2310	1474.87
						2 Power Receptacles, 4 USB Charging	Q, V	EUE2-HL0B-2400	1534.87
						3 Power Receptacles, 1 Data Port, 1 Cable Bay	Q, V	EUE2-HL0B-3012	1294.87
						3 Power Receptacles, 3 Data Ports	Q, V	EUE2-HL0B-3030	1294.87
						3 Power Receptacles, 1 USB Charging, 1 Cable Bay	Q, V	EUE2-HL0B-3102	1354.87
						3 Power Receptacles, 1 USB Charging, 2 Data Ports	Q, V	EUE2-HL0B-3120	1354.87
						3 Power Receptacles, 2 USB Charging, 1 Data Port	Q, V	EUE2-HL0B-3210	1414.87
						3 Power Receptacles, 3 USB Charging	Q, V	EUE2-HL0B-3300	1474.87
						4 Power Receptacles, 1 Cable Bay	Q, V	EUE2-HL0B-4002	1294.87
						4 Power Receptacles, 2 Data Ports	Q, V	EUE2-HL0B-4020	1294.87
						4 Power Receptacles, 1 USB Charging, 1 Data Port	Q, V	EUE2-HL0B-4110	1354.87
						4 Power Receptacles, 2 USB Charging	Q, V	EUE2-HL0B-4200	1414.87
						5 Power Receptacles, 1 Data Port	Q, V	EUE2-HL0B-5010	1294.87
						5 Power Receptacles, 1 USB Charging	Q, V	EUE2-HL0B-5100	1354.87
						6 Power Receptacles	Q, V	EUE2-HL0B-6000	1294.87

Flip Top Unit

Hardwire — Double-Sided

Width	Bezel Depth	Cord Length	Trim Color	Port Color	Port	Configuration	Flip Top Unit Cutout Code Options	Number	Price
5 5/16" (135mm)	4 3/8" (111mm)	12' (3658mm)	Clear Anodized	White	4	1 Power Receptacle, 1 Data Port, 1 Cable Bay	M, P	EUE2-HLOW-1012	\$1132.63
						1 Power Receptacle, 3 Data Ports	M, P	EUE2-HLOW-1030	1132.63
						1 Power Receptacle, 1 USB Charging, 1 Cable Bay	M, P	EUE2-HLOW-1102	1192.63
						1 Power Receptacle, 1 USB Charging, 2 Data Ports	M, P	EUE2-HLOW-1120	1192.63
						1 Power Receptacle, 3 USB Charging	M, P	EUE2-HLOW-1300	1312.63
						2 Power Receptacles, 1 Cable Bay	M, P	EUE2-HLOW-2002	1132.63
						2 Power Receptacles, 2 Data Ports	M, P	EUE2-HLOW-2020	1132.63
						2 Power Receptacles, 1 USB Charging, 1 Data Port	M, P	EUE2-HLOW-2110	1192.63
						2 Power Receptacles, 2 USB Charging	M, P	EUE2-HLOW-2200	1252.63
						3 Power Receptacles, 1 Data Port	M, P	EUE2-HLOW-3010	1132.63
						3 Power Receptacles, 1 USB Charging	M, P	EUE2-HLOW-3100	1192.63
						4 Power Receptacles	M, P	EUE2-HLOW-4000	1132.63
					6	1 Power Receptacle, 3 Data Ports, 1 Cable Bay	Q, V	EUE2-HLOW-1032	\$1132.63
						1 Power Receptacle, 5 Data Ports	Q, V	EUE2-HLOW-1050	1132.63
						1 Power Receptacle, 1 USB Charging, 2 Data Ports, 1 Cable Bay	Q, V	EUE2-HLOW-1122	1192.63
						1 Power Receptacle, 1 USB Charging, 4 Data Ports	Q, V	EUE2-HLOW-1140	1192.63
						1 Power Receptacle, 2 USB Charging, 1 Data Port, 1 Cable Bay	Q, V	EUE2-HLOW-1212	1252.63
						1 Power Receptacle, 2 USB Charging, 3 Data Ports	Q, V	EUE2-HLOW-1230	1252.63
						1 Power Receptacle, 3 USB Charging, 1 Cable Bay	Q, V	EUE2-HLOW-1302	1312.63
						1 Power Receptacle, 3 USB Charging, 2 Data Ports	Q, V	EUE2-HLOW-1320	1312.63
						2 Power Receptacles, 2 Data Ports, 1 Cable Bay	Q, V	EUE2-HLOW-2022	1132.63
						2 Power Receptacles, 4 Data Ports	Q, V	EUE2-HLOW-2040	1132.63
						2 Power Receptacles, 1 USB Charging, 1 Data Port, 1 Cable Bay	Q, V	EUE2-HLOW-2112	1192.63
						2 Power Receptacles, 1 USB Charging, 3 Data Ports	Q, V	EUE2-HLOW-2130	1192.63
						2 Power Receptacles, 2 USB Charging, 1 Cable Bay	Q, V	EUE2-HLOW-2202	1252.63
						2 Power Receptacles, 2 USB Charging, 2 Data Ports	Q, V	EUE2-HLOW-2220	1252.63
						2 Power Receptacles, 3 USB Charging, 1 Data Port	Q, V	EUE2-HLOW-2310	1312.63
						2 Power Receptacles, 4 USB Charging	Q, V	EUE2-HLOW-2400	1372.63
						3 Power Receptacles, 1 Data Port, 1 Cable Bay	Q, V	EUE2-HLOW-3012	1132.63
						3 Power Receptacles, 3 Data Ports	Q, V	EUE2-HLOW-3030	1132.63
						3 Power Receptacles, 1 USB Charging, 1 Cable Bay	Q, V	EUE2-HLOW-3102	1192.63
						3 Power Receptacles, 1 USB Charging, 2 Data Ports	Q, V	EUE2-HLOW-3120	1192.63
						3 Power Receptacles, 2 USB Charging, 1 Data Port	Q, V	EUE2-HLOW-3210	1252.63
						3 Power Receptacles, 3 USB Charging	Q, V	EUE2-HLOW-3300	1312.63
						4 Power Receptacles, 1 Cable Bay	Q, V	EUE2-HLOW-4002	1132.63
						4 Power Receptacles, 2 Data Ports	Q, V	EUE2-HLOW-4020	1132.63
						4 Power Receptacles, 1 USB Charging, 1 Data Port	Q, V	EUE2-HLOW-4110	1192.63
						4 Power Receptacles, 2 USB Charging	Q, V	EUE2-HLOW-4200	1252.63
						5 Power Receptacles, 1 Data Port	Q, V	EUE2-HLOW-5010	1132.63
						5 Power Receptacles, 1 USB Charging	Q, V	EUE2-HLOW-5100	1192.63
						6 Power Receptacles	Q, V	EUE2-HLOW-6000	1132.63

